

測試報告

報告編號：1911C140
 產品名稱：AC1300 高增益無線 MU-MIMO USB 網路卡
 型式：Archer T4U
 系列型式：N/A
 廠牌：tp-link
 申請人名稱：聯洲國際有限公司
 申請人地址：新北市板橋區中山路一段 156 號 13 樓
 製造廠商：普聯技術有限公司
 器材型式：WLAN 5GHz DFS Slave
 樣品編號：DG2019112235 for conducted, DG2019112227 for radiated.
 檢驗標準：低功率射頻電機技術規範: NCC LP0002(107-01-10)
 試驗結果：符合

收件日期：108 年 11 月 21 日
 測試日期：108 年 11 月 21 日 ~ 109 年 01 月 09 日
 發行日期：109 年 01 月 22 日

實驗室名稱：東研信超股份有限公司
 實驗室地址：台北市內湖區舊宗路二段171巷18號
 試驗場地地址：新北市汐止區大同路二段169巷68-1號
 電話：(02)2641-8198
 傳真：(02)2641-8698
 認可登錄編號：0659
 認可範圍：9 kHz - 40 GHz
 認可有效期限：2018/08/21~2021/08/20

本測試報告內所記載之測試結果以及待測試設備系統之組成，係依照上述檢驗標準所規定之量測方法實施。

報告審核人：_____

陳冠昇, 工程師

報告簽署人：_____

許惠超, 經理



本實驗室聲明

除非本實驗室與客戶間有書面同意特定之量測不準確度，否則本實驗室依適用的測試標準、程式所完成之測試報告，係以一般商用範圍可接受之不準確度來表示測試結果之正確性。

本測試報告所記載之測試結果僅對客戶所指定之待測樣品，在本測試報告所述及之測試條件下所實施之量測有效。製造商有責任確保爾後製造之量產品，其所使用之電氣、機構的零件與本待測樣品所使用的相同。本實驗室沒有義務對客戶或他者，以本實驗室所出具之測試報告做其它增加或減少之推斷。

本測試報告屬客戶之機密文件。居於客戶、本實驗室間之相互保護，未經本實驗室簽署之局部影印或複製均屬無效。

報告發行歷史紀錄

報告版本	內容	發行日期
R00	初始報告。	109年01月22日

低功率射頻電機測試紀錄表

項次	測試項目	適用規範	測試結果	測試設備	結果判定
1	動態頻率選擇(DFS)	低功率射頻電機技術規範 4.7.7.2 節	Page 18	Page 13	合格

Table of Contents	Page
1 . APPLIED STANDARDS	6
1.1 OTHER RELEVANT STATEMENT	6
2 . EUT INFORMATION	7
2.1 EUT SPECIFICATION TABLE	7
2.3 CONDUCTED OUTPUT POWER AND EIRP	9
3 .U-NII DFS RULE REQUIREMENTS	10
3.1 WORKING MODES AND REQUIRED TEST ITEMS	10
3.2 TEST LIMITS AND RADAR SIGNAL PARAMETERS	11
4 . TEST INSTRUMENTS	13
5 . DYNAMIC FREQUENCY SELECTION (DFS) TEST	14
5.1 DFS MEASUREMENT SYSTEM	14
5.2 CALIBRATION OF DFS DETECTION THRESHOLD LEVEL	17
5.3 DEVIATION FROM TEST STANDARD	17
6 . TEST RESULTS	18
6.1 SUMMARY OF TEST RESULT	18
6.2 TEST MODE: DEVICE OPERATING IN MASTER MODE	18
6.3 DFS DETECTION THRESHOLD	19
6.4 CHANNEL CLOSING TRANSMISSION AND CHANNEL MOVE TIME WLAN TRAFFIC	20
6.5 NON- OCCUPANCY PERIOD	22
7 . EUT TEST PHOTO	23

1. APPLIED STANDARDS

國家通訊傳播委員會低功率射頻電機技術規範/低功率 0002 (LP0002) (107-01-10)
 FCC Part 15, Subpart E (Section 15.407) / FCC 06-96
 FCC KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
 FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
 FCC KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02

1.1 OTHER RELEVANT STATEMENT

1. 本測試報告屬新設計之機型，申請新的型式認證。
2. 此產品具有WLAN 2.4G，WLAN 5G與DFS Slave功能。

功能	報告編號	備註
WLAN 2.4 GHz	BTL-NCC-1-1911C140	-
WLAN 5 GHz	BTL-NCC-2-1911C140	-
DFS Slave	BTL-NCC-3-1911C140	本報告

2. EUT INFORMATION

2.1 EUT SPECIFICATION TABLE

Table 1: Specification of EUT

Product name	AC1300 高增益無線 MU-MIMO USB 網路卡
Brand Name	tp-link
Model Name	Archer T4U
Operational Mode	Client
Operating Frequency Range	5250 MHz 到 5350 MHz 5470 MHz 到 5725 MHz
Modulation	OFDM
Max. Output Power	21.54dBm
Max. e.i.r.p.	27.04dBm (505.825mW > 500mW)

Note: This device was functioned as a

☐ Master ☒ Client device without radar detection ☐ Client device with radar detection

2.2 DESCRIPTION OF AVAILABLE ANTENNAS TO THE EUT

1. Channel List:

5250 MHz 到 5350 MHz頻段					
IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
頻道 (CH)	頻率 (MHz)	頻道 (CH)	頻率 (MHz)	頻道 (CH)	頻率 (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

5470 MHz 到 5725 MHz頻段					
IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
頻道 (CH)	頻率 (MHz)	頻道 (CH)	頻率 (MHz)	頻道 (CH)	頻率 (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590		
112	5560	126	5630		
116	5580	134	5670		
120	5600				
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				

2. Antenna Specification:

代號	廠牌	P/N	類型	連接頭	增益值 (dBi)
1		3101500829	Dipole	I-PEX	2.97
2		3101500829	Dipole	I-PEX	1.99

Note: This EUT supports CDD, and antenna gains are not equal, so Directional gain=
 $10\log [(10^{G1/20}+10^{G2/20}+...10^{GN/20})^2/N]$ dBi=5.50.

2.3 CONDUCTED OUTPUT POWER AND EIRP

Table 2: The Output Power and e.i.r.p. List

Mode: TX IEEE 802.11a				
Frequency Band (MHz)	Max. Output Power (dBm)	Antenna Gain	Max. e.i.r.p. (dBm)	Max. e.i.r.p. (mW)
5250~5350	18.16	2.97	21.13	129.718
5470~5725	17.98	2.97	20.95	124.451

Mode: TX IEEE 802.11n (HT40)				
Frequency Band (MHz)	Max. Output Power (dBm)	Directional Gain	Max. e.i.r.p. (dBm)	Max. e.i.r.p. (mW)
5250~5350	20.96	5.50	26.46	442.588
5470~5725	21.23	5.50	26.73	470.977

Mode: TX IEEE 802.11ac (VHT80)				
Frequency Band (MHz)	Max. Output Power (dBm)	Directional Gain	Max. e.i.r.p. (dBm)	Max. e.i.r.p. (mW)
5250~5350	21.26	5.50	26.76	474.242
5470~5725	21.54	5.50	27.04	505.825

3.U-NII DFS RULE REQUIREMENTS

3.1 WORKING MODES AND REQUIRED TEST ITEMS

The manufacturer shall state whether the UUT is capable of operating as a Master and/or a Client. If the UUT is capable of operating in more than one operating mode then each operating mode shall be tested separately. See tables 1 and 2 for the applicability of DFS requirements for each of the operational modes.

Table 5: Applicability of DFS requirements prior to use a channel

Requirement	Operational Mode		
	Master	Client without radar detection	Client with radar detection
Non-Occupancy Period	✓	✓	✓
DFS Detection Threshold	✓	Not required	✓
Channel Availability Check Time	✓	Not required	Not required
Uniform Spreading	✓	Not required	Not required
U-NII Detection Bandwidth	✓	Not required	✓

Table 6: Applicability of DFS requirements during normal operation.

Requirement	Operational Mode		
	Master	Client without radar detection	Client with radar detection
DFS Detection Threshold	✓	Not required	✓
Channel Closing Transmission Time	✓	✓	✓
Channel Move Time	✓	✓	✓
U-NII Detection Bandwidth	✓	Not required	✓

3.2 TEST LIMITS AND RADAR SIGNAL PARAMETERS

DETECTION THRESHOLD VALUES

Table 7: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection.

Maximum Transmit Power	Value (See Notes 1 and 2)
e.i.r.p. $\geq$ 200 milliwatt	-64 dBm
e.i.r.p. < 200 milliwatt and Power spectral density < 10 dBm/MHz	-62 dBm
e.i.r.p. < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note 3: e.i.r.p. is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

Table 8: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the UNII 99% transmission power bandwidth. See Note 3.

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

PARAMETERS OF DFS TEST SIGNALS

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 9: Short Pulse Radar Test Waveforms.

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	Roundup $\left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

Table 8: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen(The center frequency for each of the 30 trials of the Bin 5 radar shall be randomly selected within 80% of the Occupied Bandwidth.) Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms.

Table 9: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

4. TEST INSTRUMENTS

Table 10: Test instruments list.

DESCRIPTION	MANUFACTURER	MODEL NO.	Serial No	Calibration Until
EXA Spectrum Analyzer	Agilent	N9010A	MY50520044	Mar. 10, 2020
Signal Generator	Agilent	E4438C	MY49071316	Mar. 10, 2020
POWER SPLITTER	Mini-Circuits	ZFRSC-123-S+	331000910-1	Mar. 10, 2020
POWER SPLITTER	Mini-Circuits	ZN4PD1-63-S+	SF9335D1045-1	Mar. 10, 2020
Attenuator	WOKEN	6SM3502	VAS1214NL	Feb. 12, 2020
Wi-Fi Router	tp-link	Archer AX6000	N/A	N/A

Note:

- (1) Calibration interval of instruments listed above is one year.
- (2) Wi-Fi Router's FCC ID: TE7AX6000


5. DYNAMIC FREQUENCY SELECTION (DFS) TEST

5.1 DFS MEASUREMENT SYSTEM


Test Procedure

1. Master device and client device are set up by conduction method as the following configuration.
2. The client device is connected to notebook and to access a IP address on wireless connection with the master device.
3. Then the master device is connected to another notebook to access a IP address.
4. Finally, let the two IP addresses run traffic with each other through the Run flow software "Lan test" to r each 17% channel loading as below

Setup

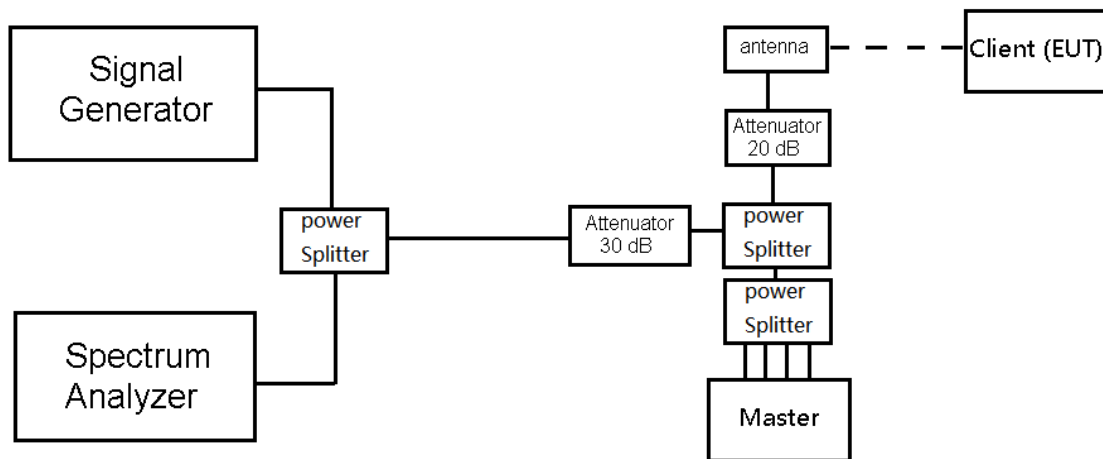

Channel Loading

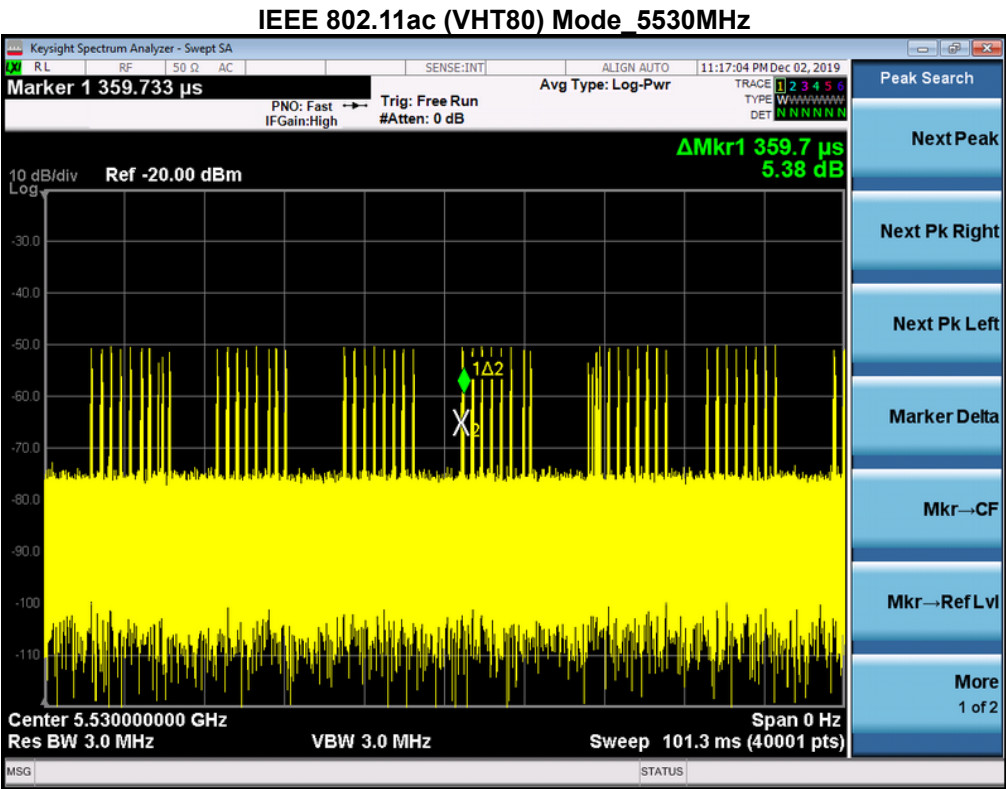

Frequency (MHz)	Marker Delta (ms)	Number	On Time (ms)	Total Time (ms)	Dutycycle (%)	Limit (%)
5530	0.3597	50	17.985	101.3	17.75	17.00

The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC 06-96. The frequency of the signal generator is incremented in 1 MHz steps from FL to FH for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer set to display 8001 bins on the horizontal axis. The time-domain resolution is 2 msec / bin with a 16 second sweep time, meeting the 10 second short pulse reporting criteria. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

Should multiple RF ports be utilized for the Master and/or Slave devices (for example, for diversity or MIMO implementations), additional combiner/dividers are inserted between the Master Combiner/Divider and the pad connected to the Master Device (and/or between the Slave Combiner/Divider and the pad connected to the Slave Device). Additional pads are utilized such that there is one pad at each RF port on each EUT.


5.2 CALIBRATION OF DFS DETECTION THRESHOLD LEVEL

A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected in place of the master device and the signal generator is set to CW mode. The amplitude of the signal generator is adjusted to yield a level of -62 dBm as measured on the spectrum analyzer.

Without changing any of the instrument settings, the spectrum analyzer is reconnected to the Common port of the Spectrum Analyzer Combiner/Divider. Measure the amplitude and calculate the difference from -62 dBm. Adjust the Reference Level Offset of the spectrum analyzer to this difference.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of -62 dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

Set the signal generator to produce a radar waveform, trigger a burst manually and measure the level on the spectrum analyzer. Readjust the amplitude of the signal generator as required so that the peak level of the waveform is at a displayed level equal to the required or desired interference detection threshold. Separate signal generator amplitude settings are determined as required for each radar type.

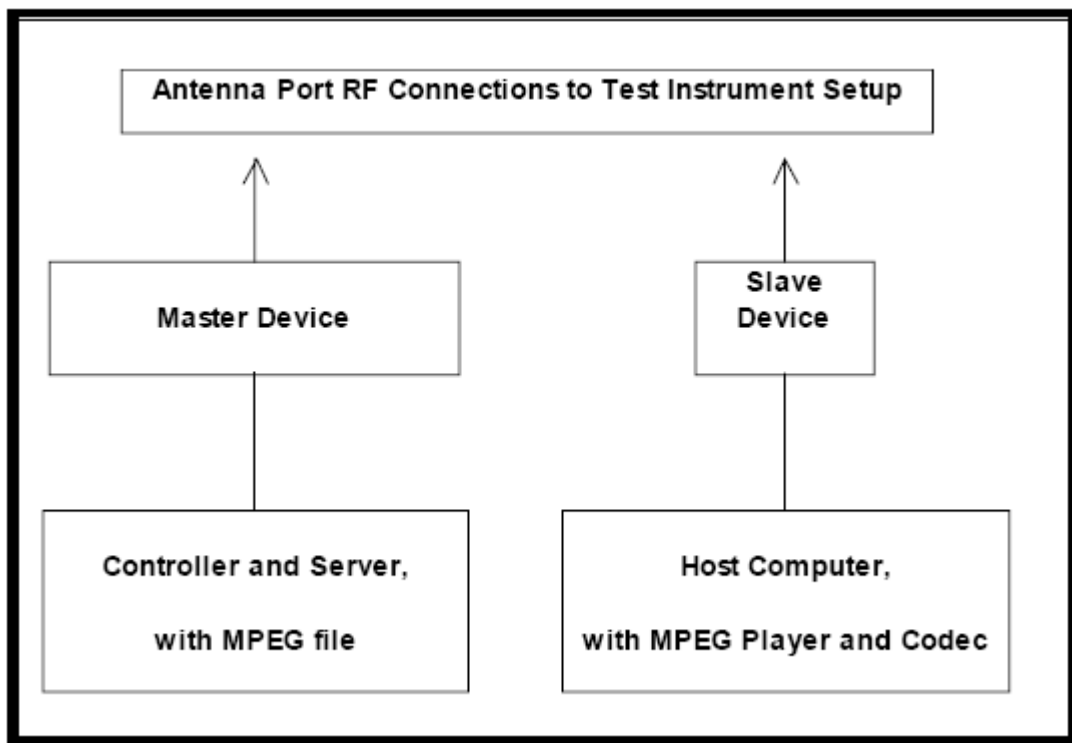

5.3 DEVIATION FROM TEST STANDARD

No deviation.

6. TEST RESULTS

6.1 SUMMARY OF TEST RESULT

Clause	Test Parameter	Test Mode and Channel	Remarks	Result
15.407	DFS Detection Threshold	-	No Applicable	N/A
15.407	Channel Availability Check Time	-	Not Applicable	N/A
15.407	Channel Move Time	IEEE 802.11ac (VHT80) 5530 MHz	Applicable	Pass
15.407	Channel Closing Transmission Time	IEEE 802.11ac (VHT80) 5530 MHz	Applicable	Pass
15.407	Non- Occupancy Period	IEEE 802.11ac (VHT80) 5530 MHz	Applicable	Pass
15.407	Uniform Spreading	-	Not Applicable	N/A
15.407	U-NII Detection Bandwidth	-	Not Applicable	N/A

6.2 TEST MODE: DEVICE OPERATING IN MASTER MODE

The EUT is slave equipment, it need a master device when testing.
Master with injection at the Master. (Radar Test Waveforms are injected into the Master)


6.3DFS DETECTION THRESHOLD

Calibration:


The EUT is slave equipment and it with the lowest gain is 1.99 dBi.
For a detection threshold level of -62dBm and the master antenna gain is 2.28 dBi, required detection threshold is -61.72 dBm ($= -64+2.28$).

Note: Maximum Transmit Power is more than 200 milliwatt in this report, so detection threshold level is -64dBm.

Setup

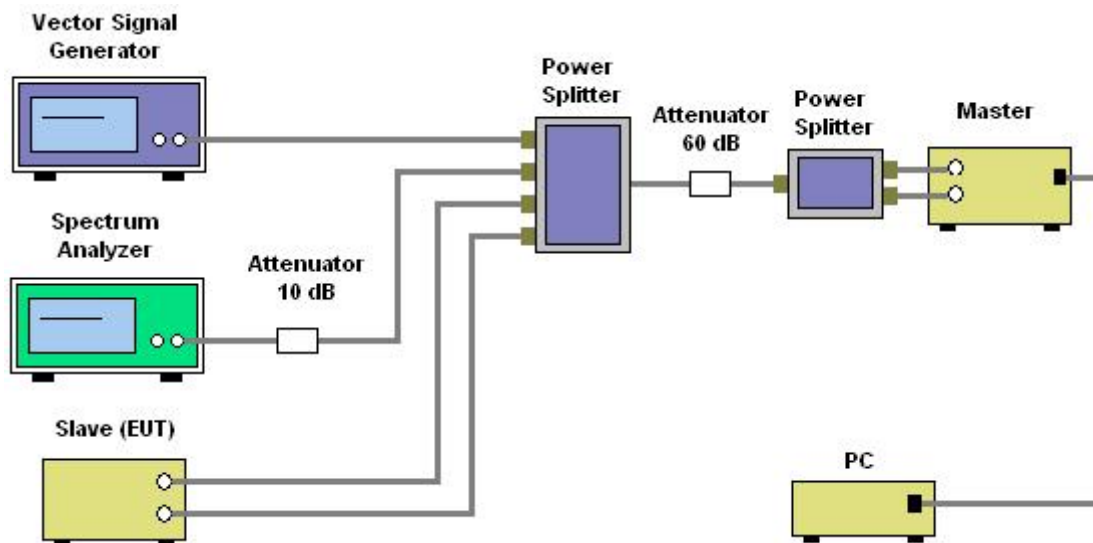


Radar Signal 0

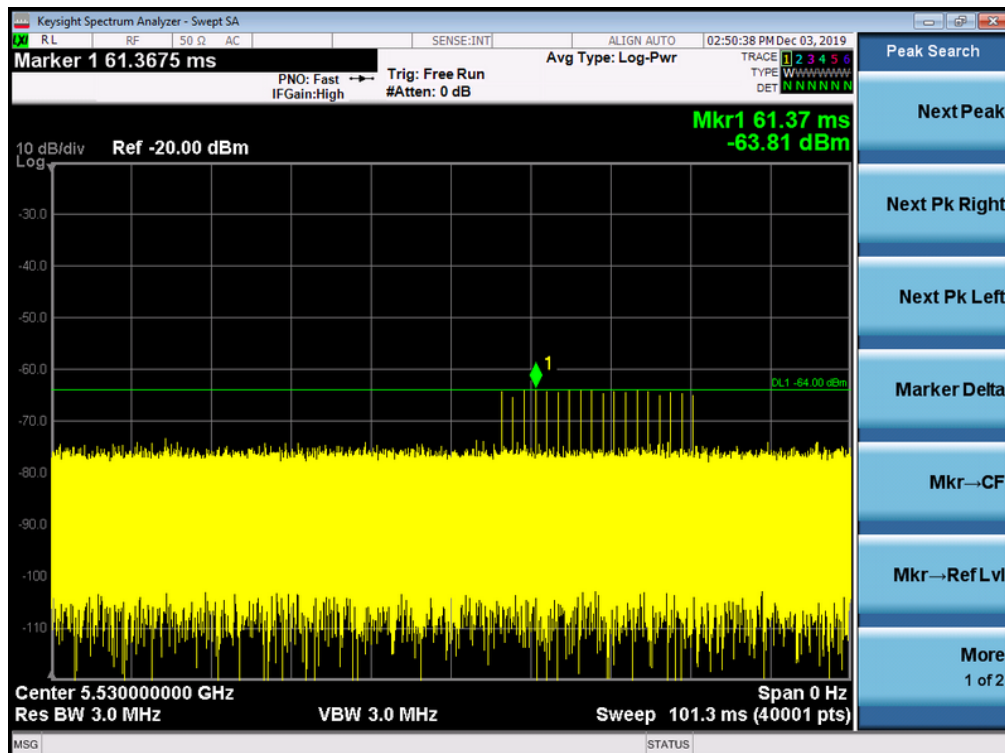

6.4 CHANNEL CLOSING TRANSMISSION AND CHANNEL MOVE TIME WLAN TRAFFIC

TX (IEEE 802.11ac (VHT80) Mode) _5530MHz

Radar signal 0

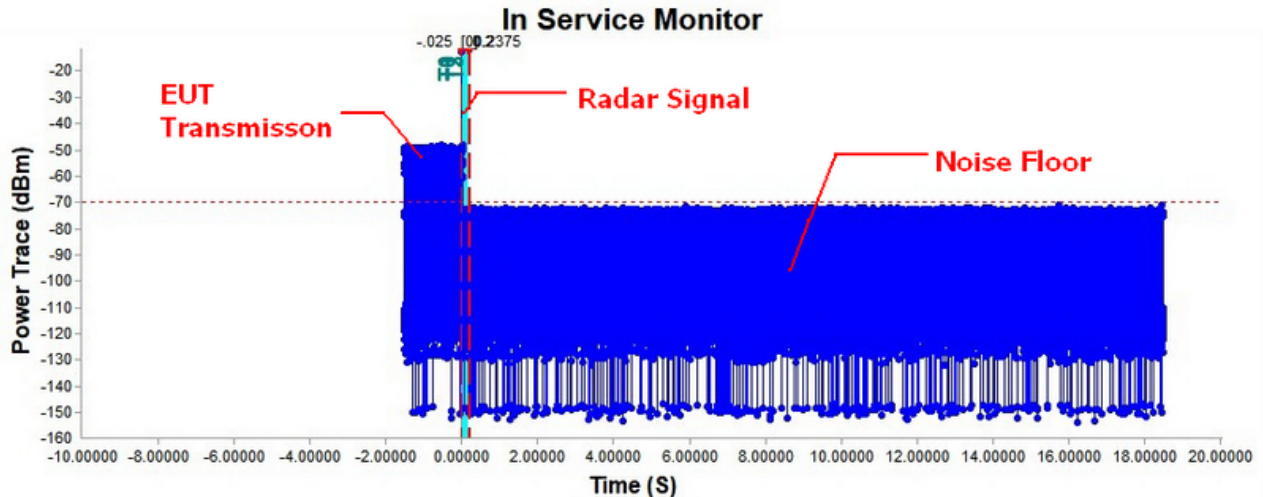


Time Index Info		
T0 : -0.0250 S (Radar Injection Start)	Time Per Bin: 0.4999875	Channel Move Time: 0.2374941 S
T1 : 0.0000 S (Radar Injection Stop)		
T2 : 0.2000 S (200msec Interval)	T2~T3 Bins Over Threshold:	Channel Close Time: 0.0 S
T3 : 0.2375 S (Channel Move Time)	= 0 Bins	

Note: T0 denotes the Radar Injection Start.

T1 denotes the start of Channel Move Time upon the end of the last Radar burst.

T2 denotes the data transmission time of 200ms from T1.

T3 denotes the end of Channel Move Time.

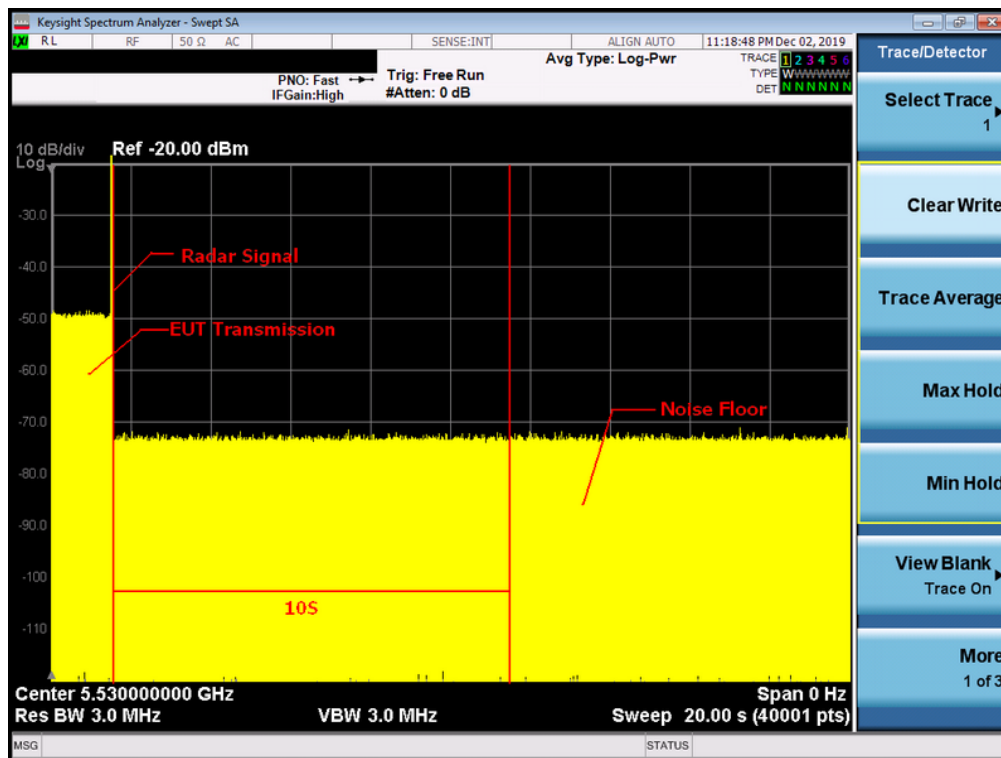

Note: An expanded plot for the device vacates the channel in the required 500ms

IEEE 802.11ac (VHT80) Mode_5530MHz		
Item	Measured Value(s)	Limit(s)
Channel Move Time	0.2374941	10
Channel Close Time	0.0	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period

6.5 NON- OCCUPANCY PERIOD

During the 30 minutes observation time, UUT did not make any transmissions on a channel after a radar signal was detected on that channel by either the Channel Availability Check or the In-Service Monitoring.

TX (IEEE 802.11ac (VHT80) Mode) 5530MHz_Non-Occupancy perrod

