


Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

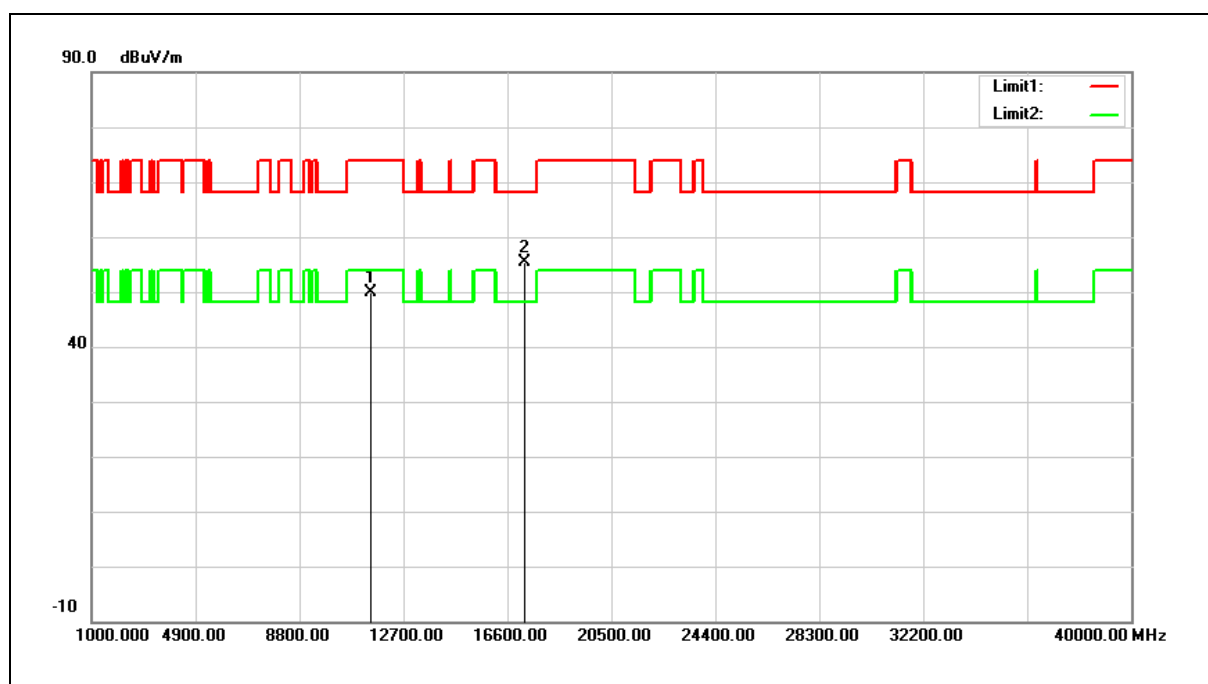


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.06	14.84	49.90	74.00	-24.10	peak
2	17235.000	35.44	19.84	55.28	68.20	-12.92	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

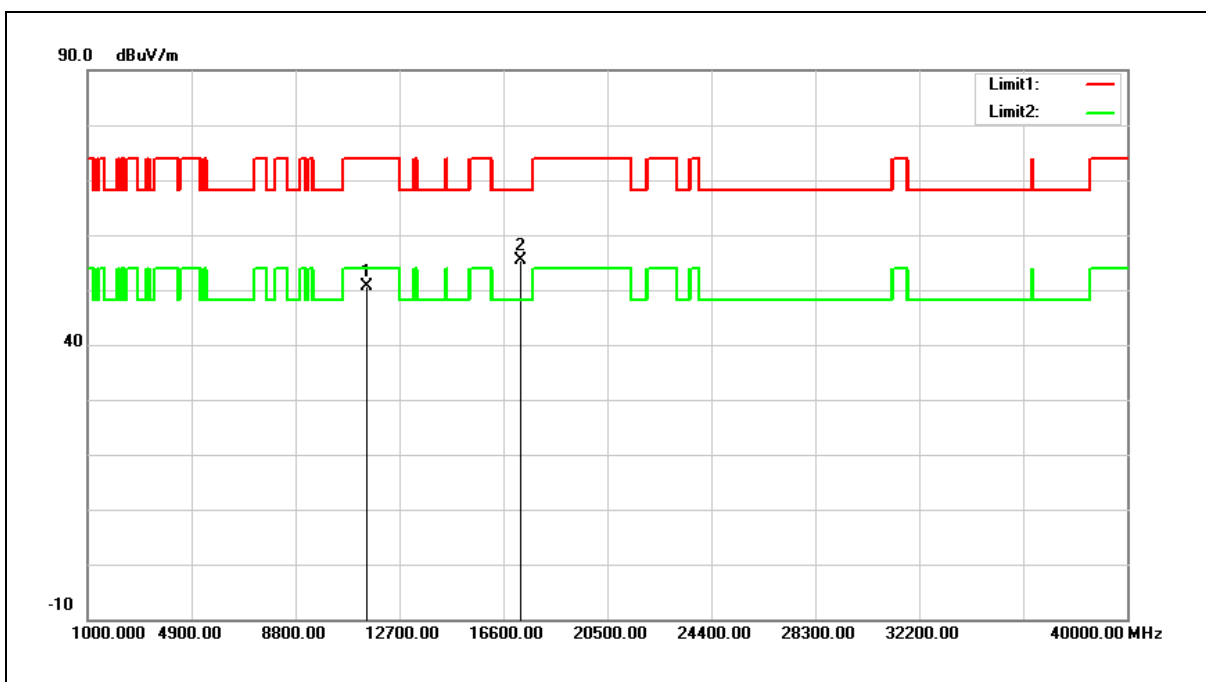


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.86	14.84	50.70	74.00	-23.30	peak
2	17235.000	35.65	19.84	55.49	68.20	-12.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

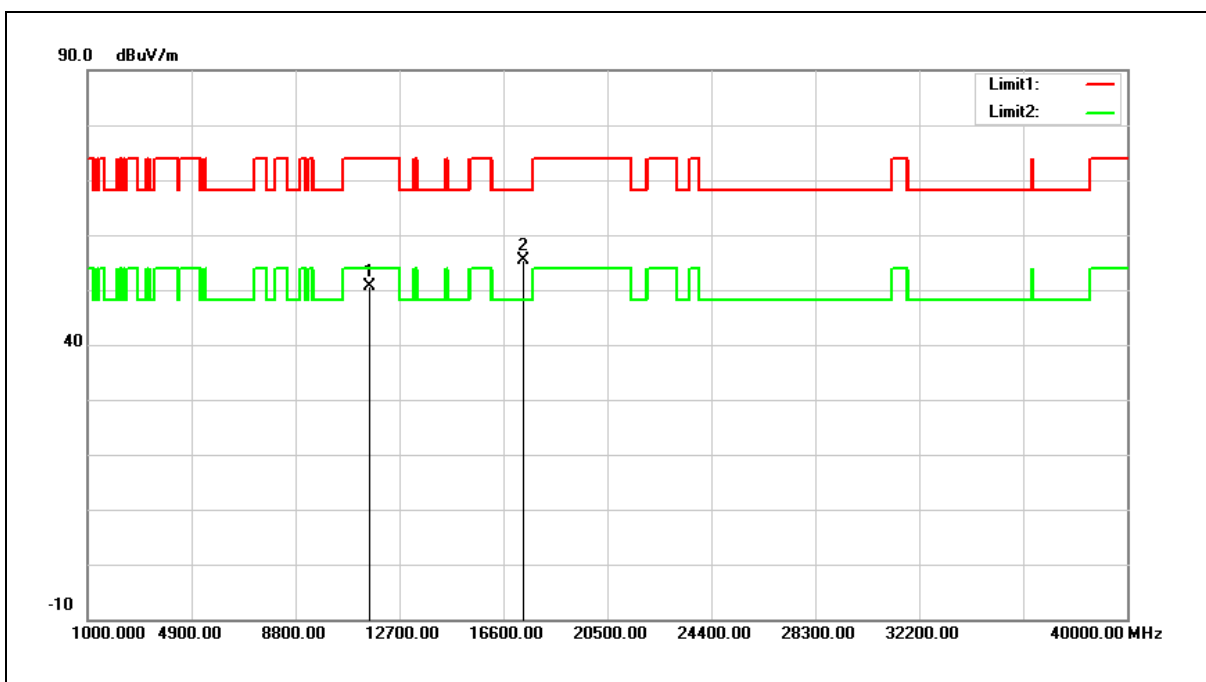


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.94	14.73	50.67	74.00	-23.33	peak
2	17355.000	34.97	20.49	55.46	68.20	-12.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

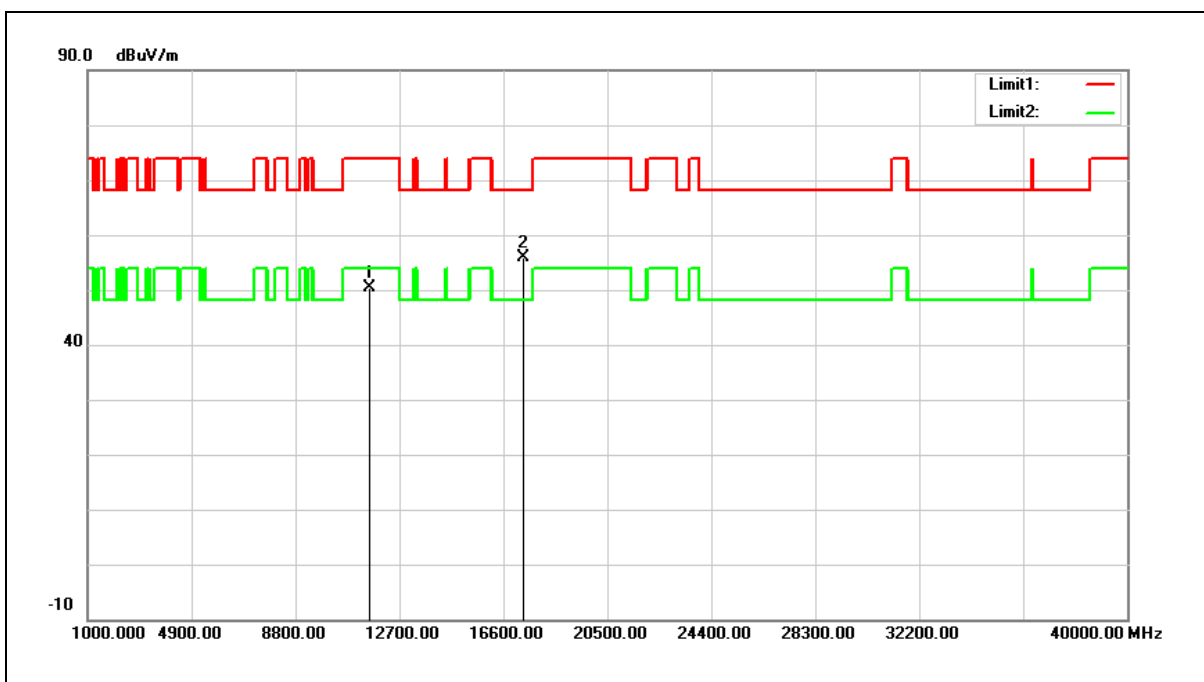


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.63	14.73	50.36	74.00	-23.64	peak
2	17355.000	35.50	20.49	55.99	68.20	-12.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

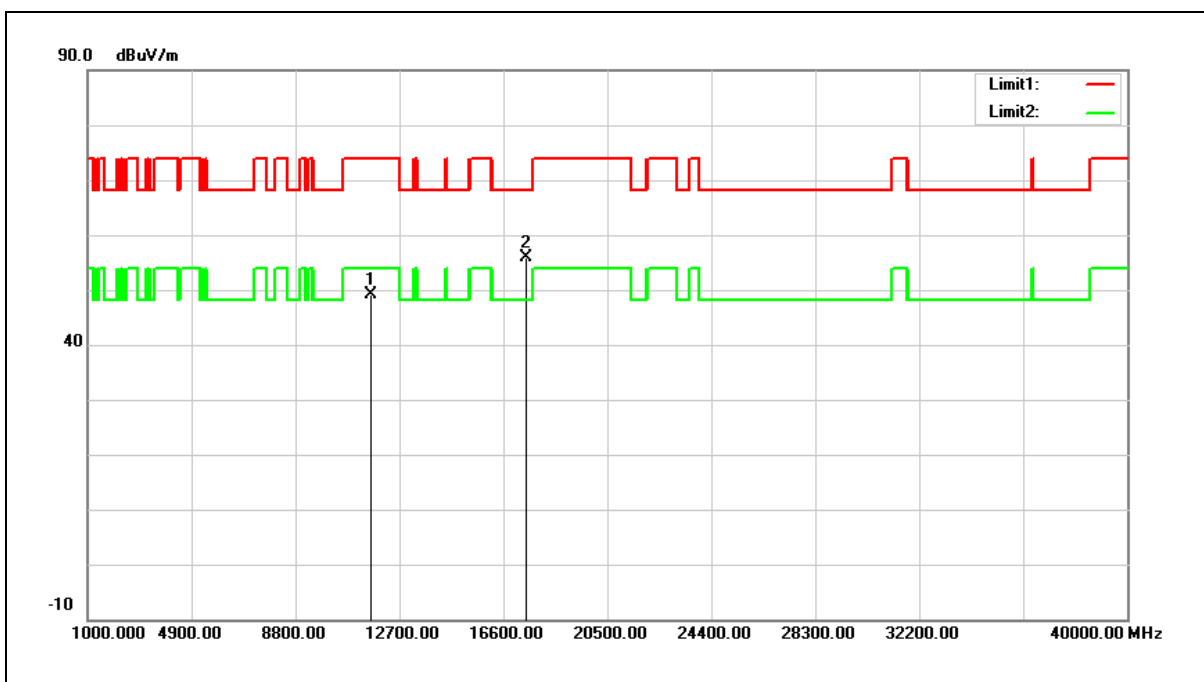


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.52	14.61	49.13	74.00	-24.87	peak
2	17475.000	34.83	21.14	55.97	68.20	-12.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

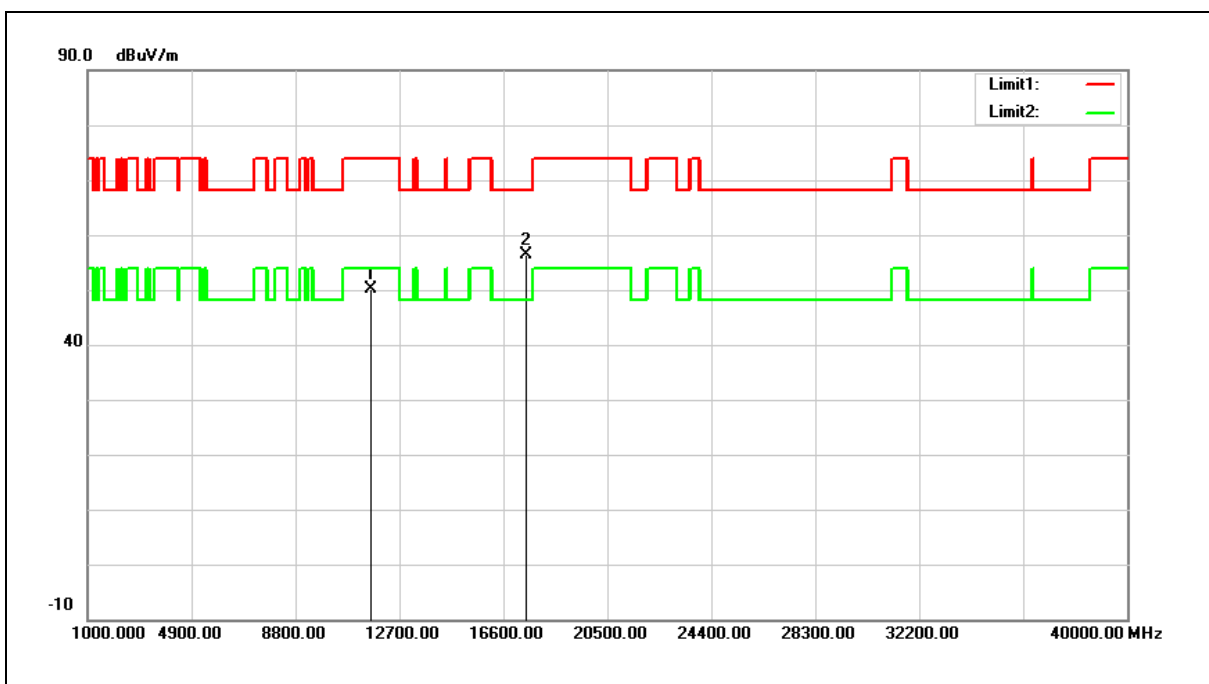


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.50	14.61	50.11	74.00	-23.89	peak
2	17475.000	35.28	21.14	56.42	68.20	-11.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

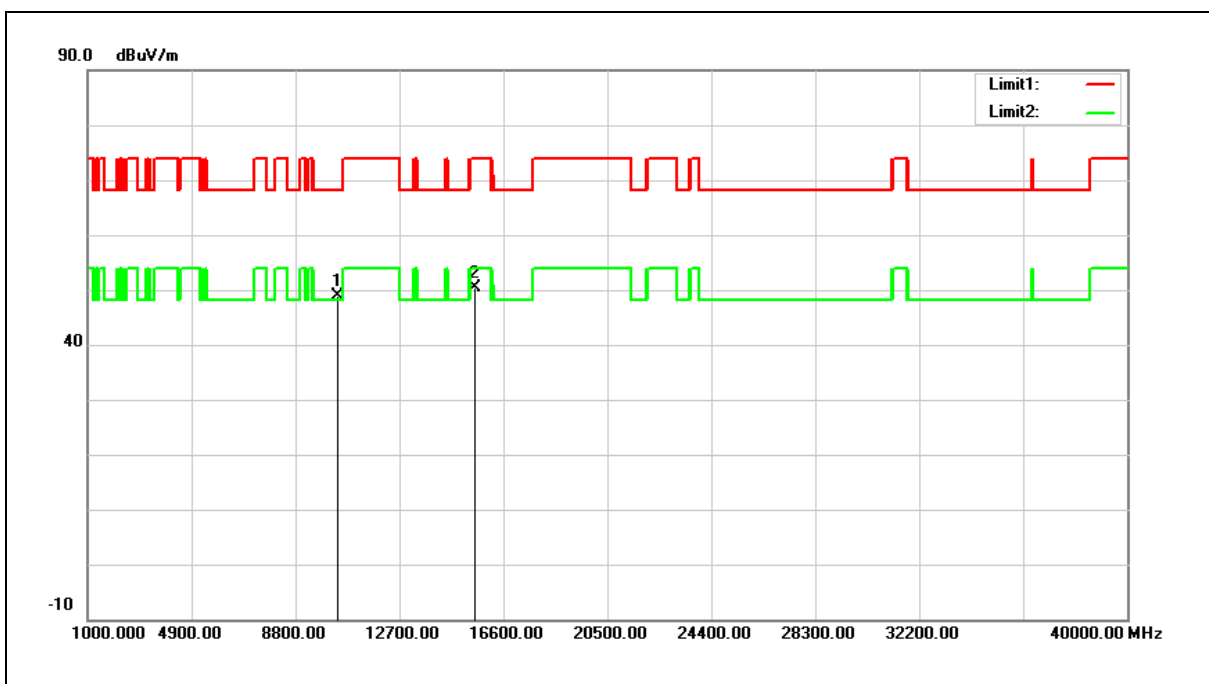


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	35.67	13.27	48.94	68.20	-19.26	peak
2	15540.000	34.65	15.81	50.46	74.00	-23.54	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

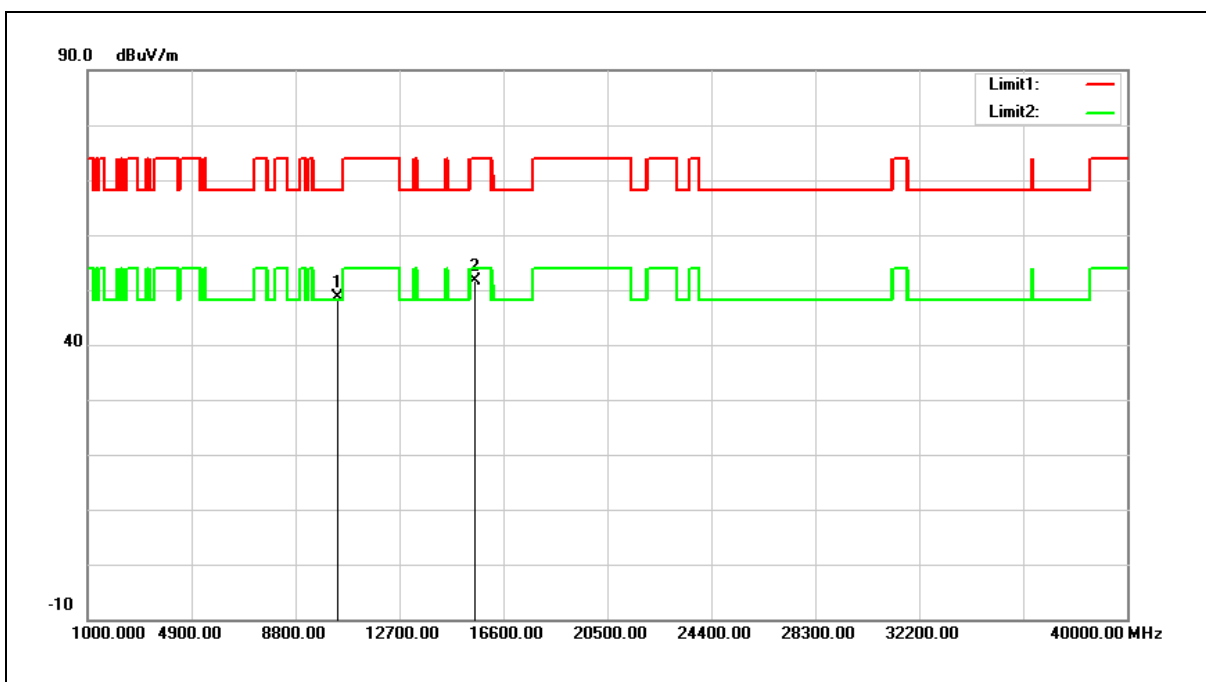


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	35.40	13.27	48.67	68.20	-19.53	peak
2	15540.000	35.73	15.81	51.54	74.00	-22.46	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

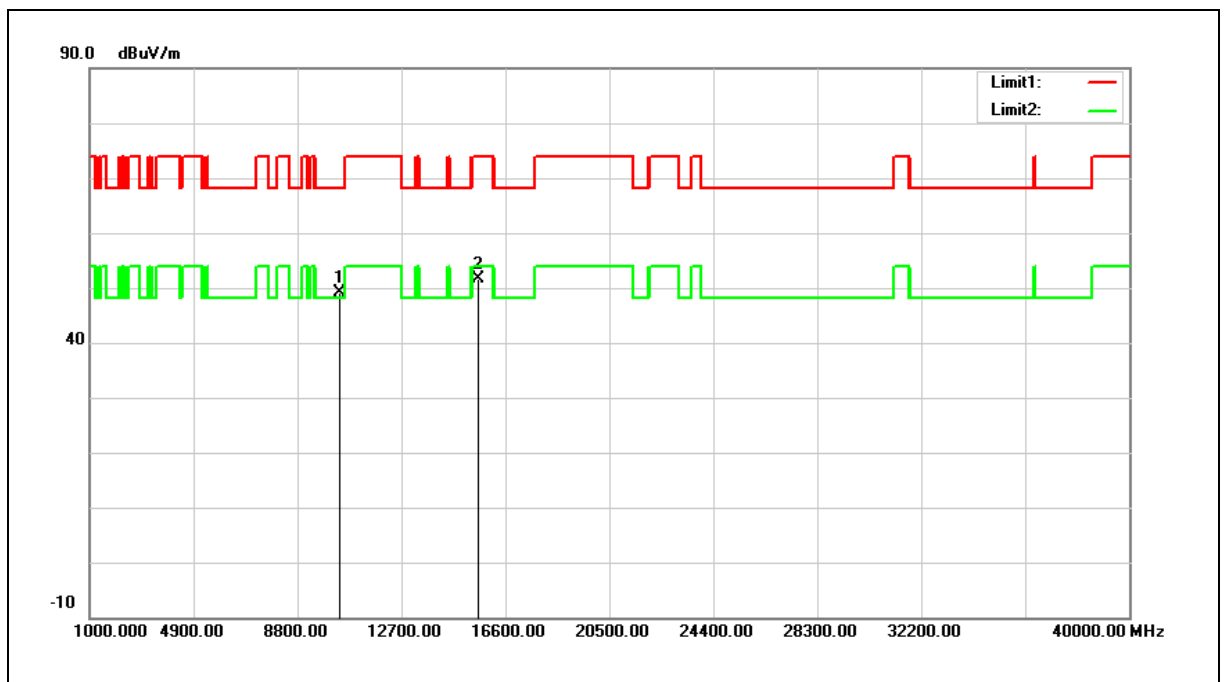


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	35.68	13.41	49.09	68.20	-19.11	peak
2	15600.000	36.02	15.63	51.65	74.00	-22.35	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

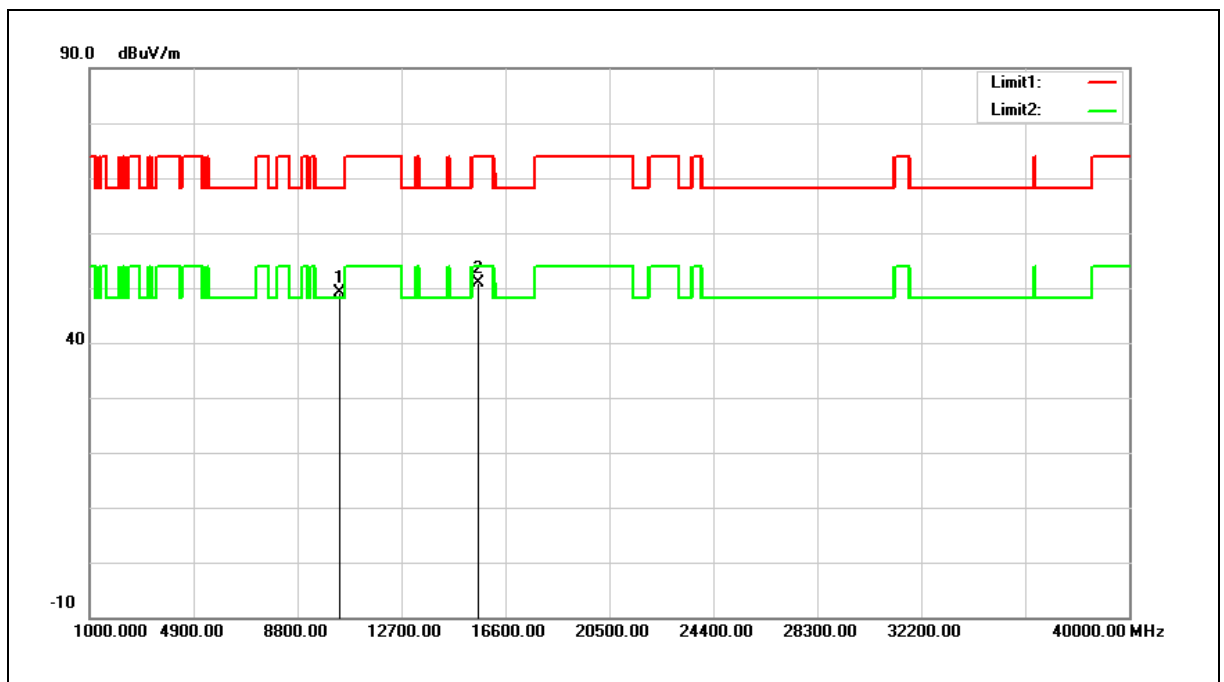


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	35.61	13.41	49.02	68.20	-19.18	peak
2	15600.000	35.22	15.63	50.85	74.00	-23.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

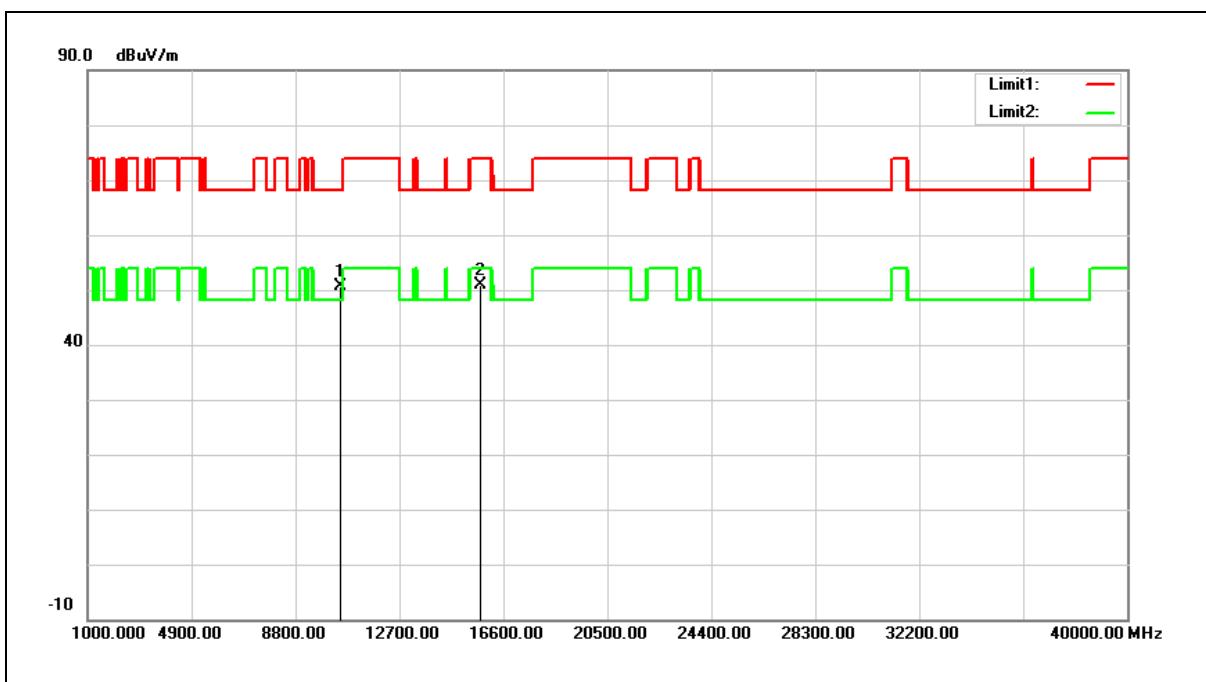


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	36.82	13.70	50.52	68.20	-17.68	peak
2	15720.000	35.60	15.27	50.87	74.00	-23.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

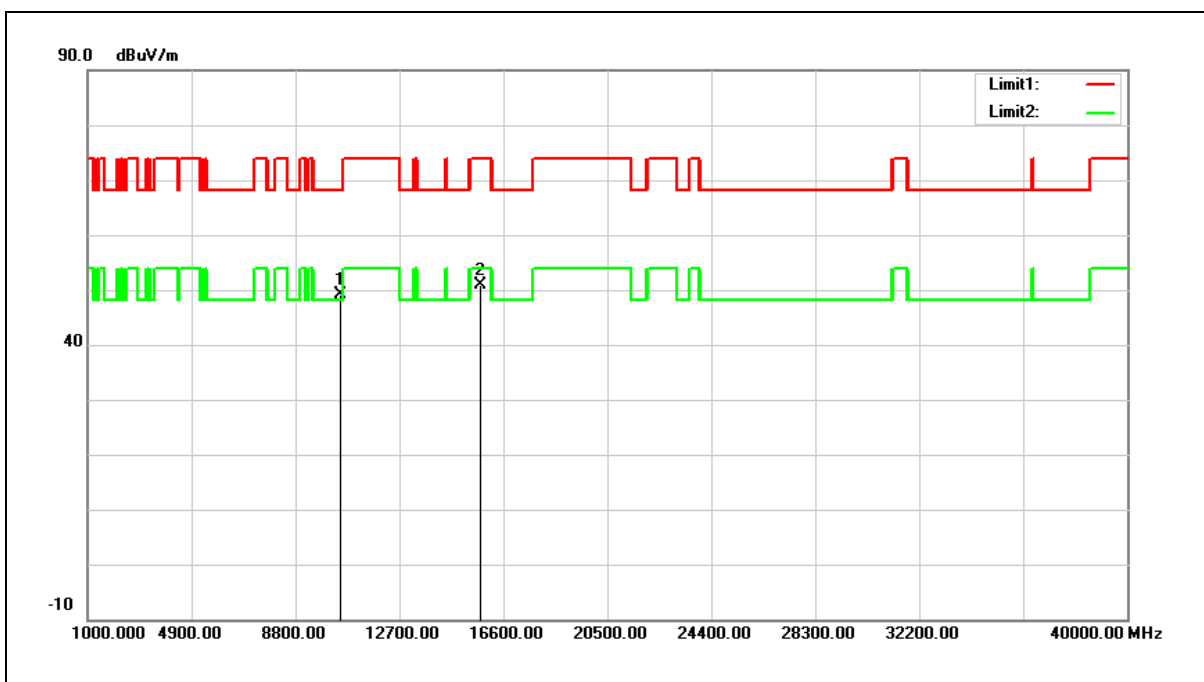


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	35.40	13.70	49.10	68.20	-19.10	peak
2	15720.000	35.55	15.27	50.82	74.00	-23.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

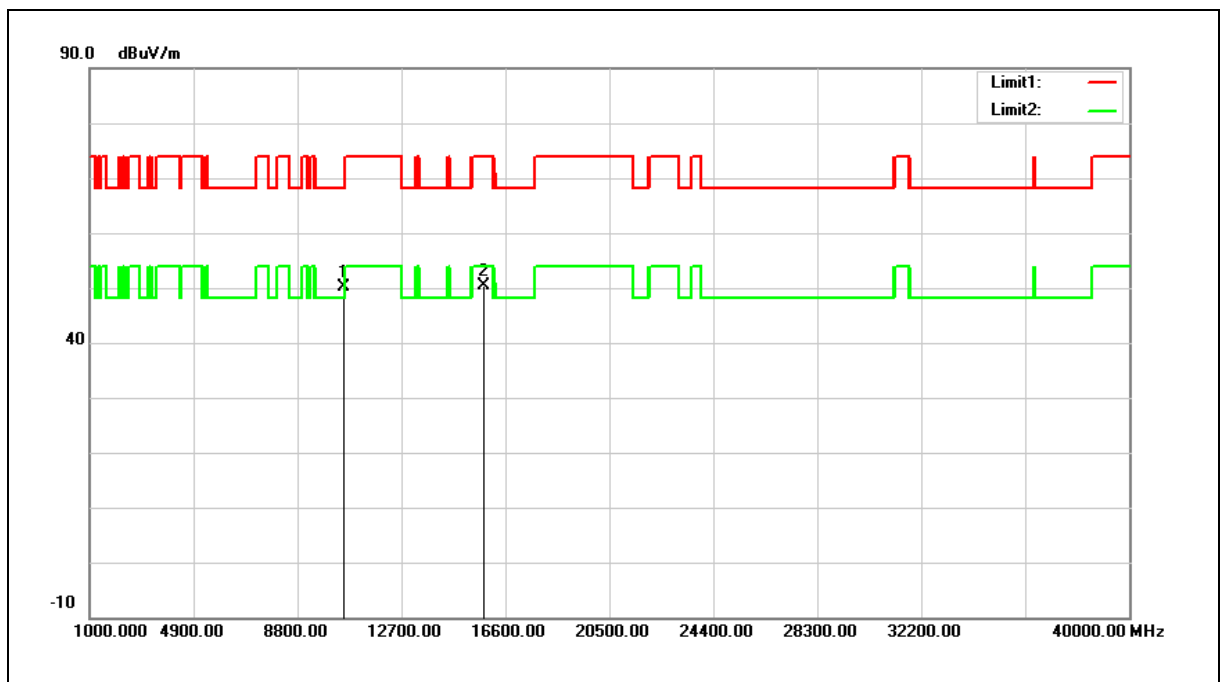


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	36.24	13.81	50.05	68.20	-18.15	peak
2	15780.000	35.25	15.11	50.36	74.00	-23.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

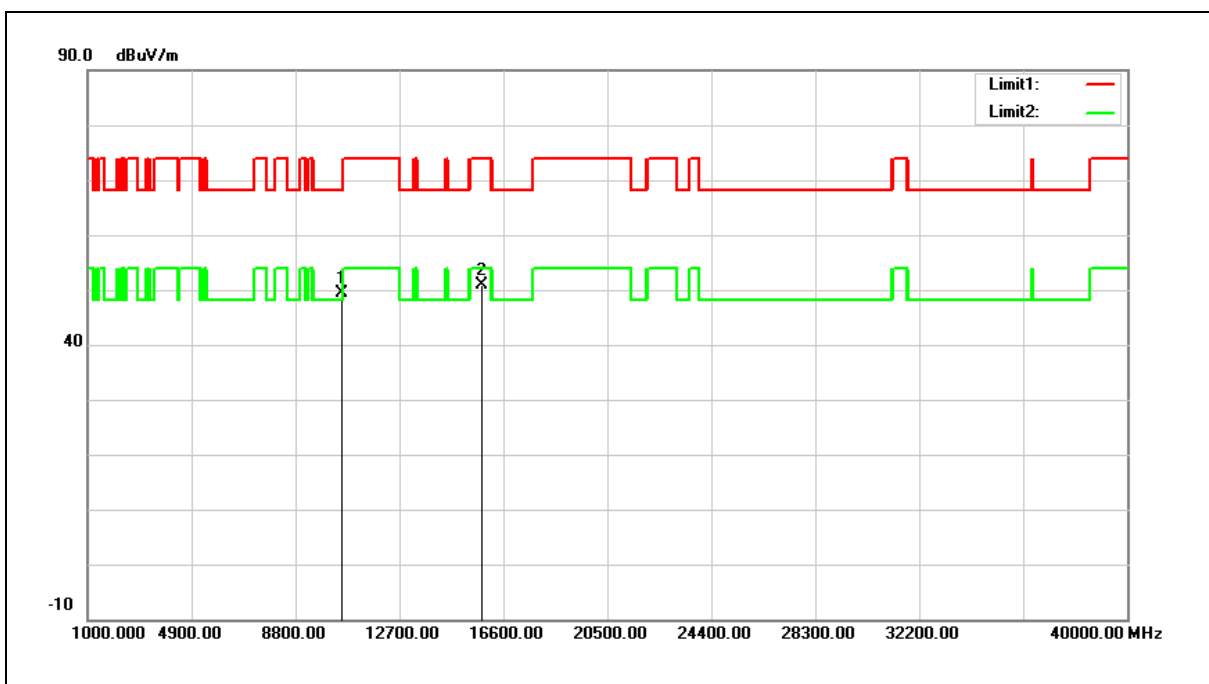


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	35.69	13.81	49.50	68.20	-18.70	peak
2	15780.000	35.87	15.11	50.98	74.00	-23.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

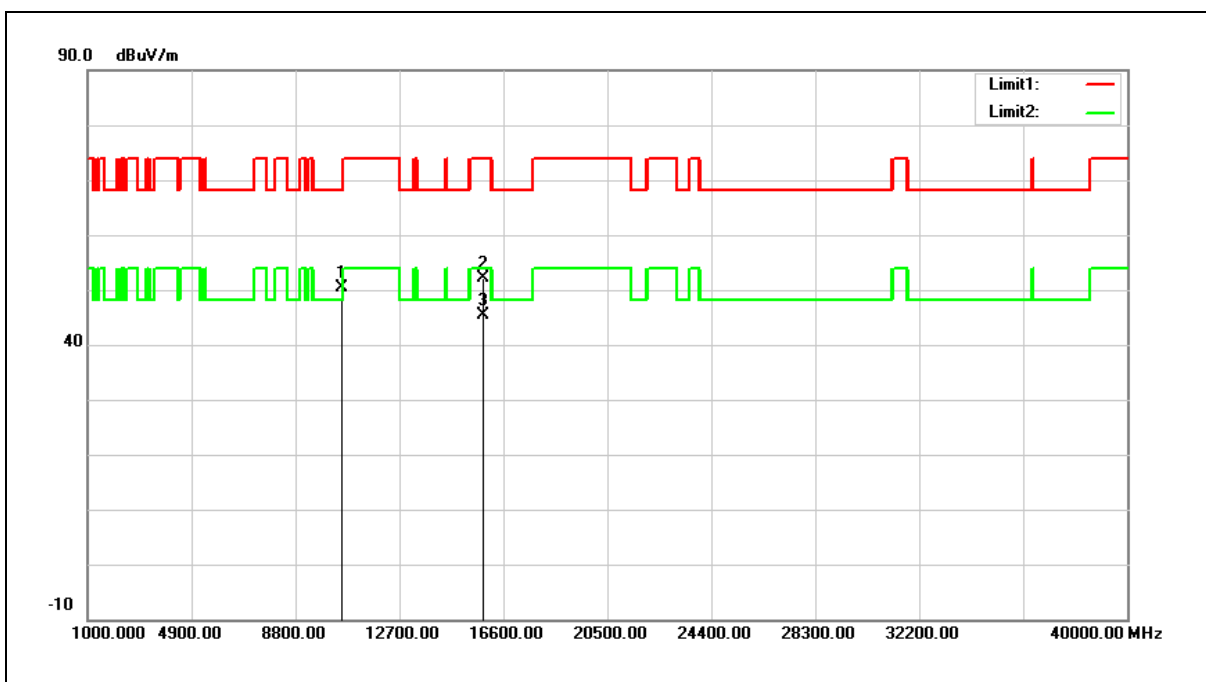


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	36.61	13.88	50.49	68.20	-17.71	peak
2	15840.000	37.31	14.93	52.24	74.00	-21.76	peak
3	15840.000	30.49	14.93	45.42	54.00	-8.58	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

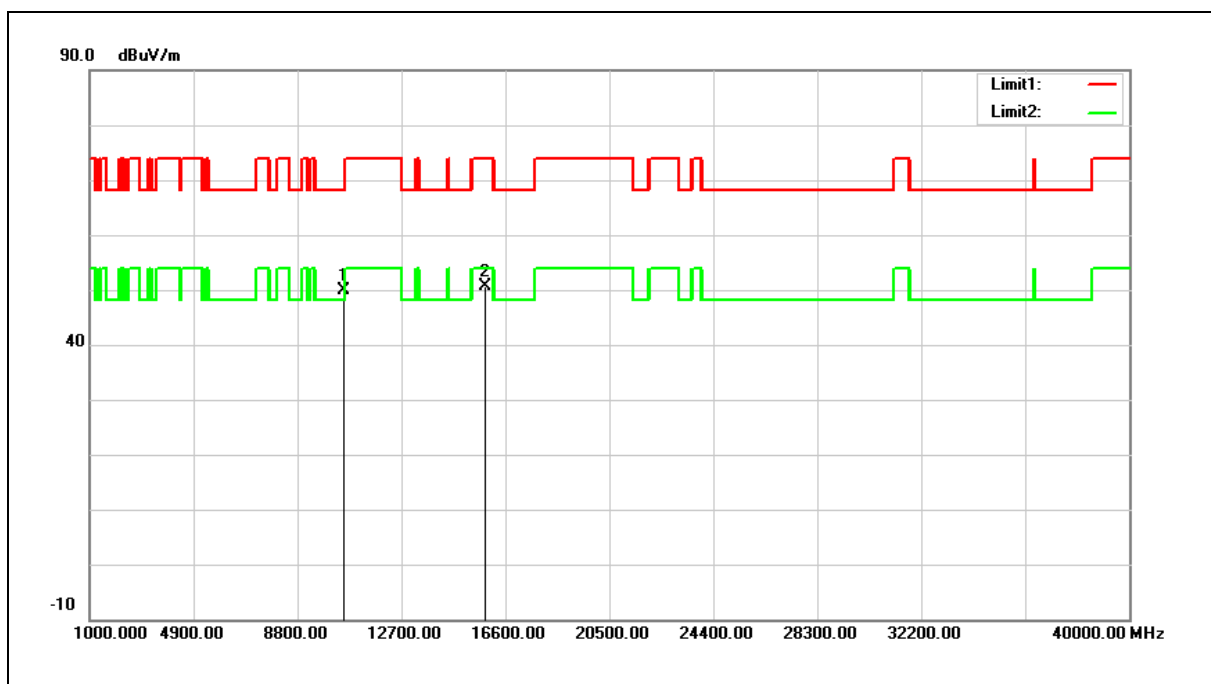


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	36.05	13.88	49.93	68.20	-18.27	peak
2	15840.000	35.74	14.93	50.67	74.00	-23.33	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

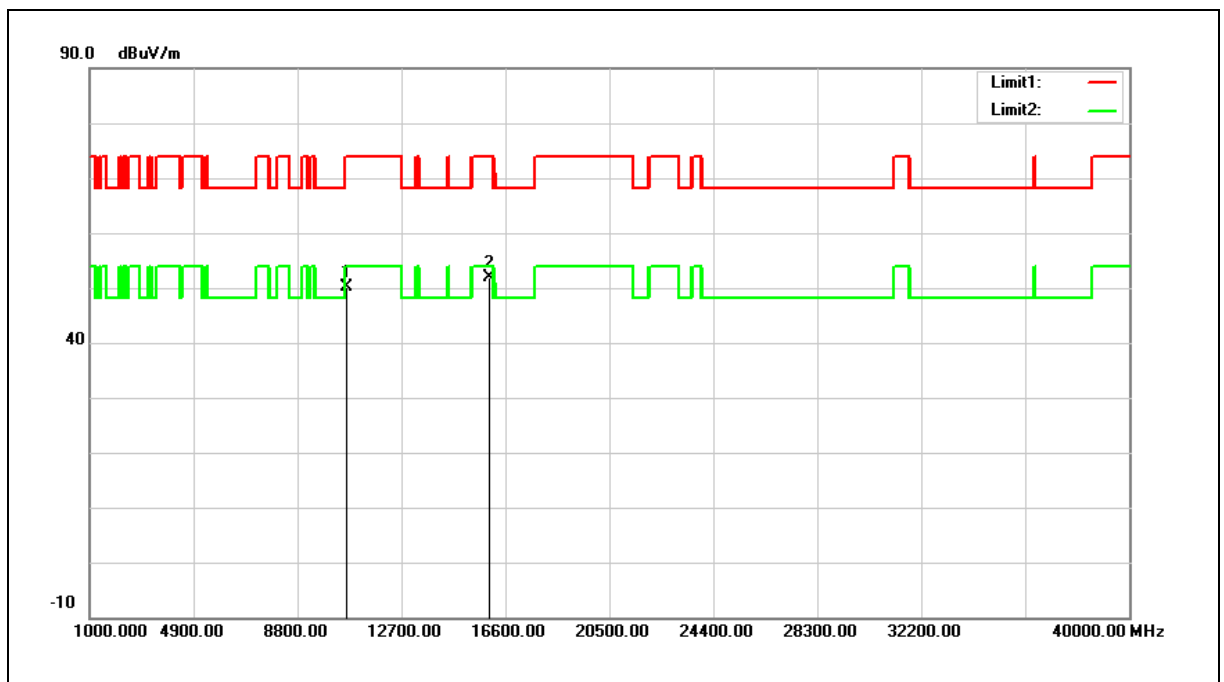


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	36.03	14.01	50.04	74.00	-23.96	peak
2	15960.000	37.29	14.58	51.87	74.00	-22.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

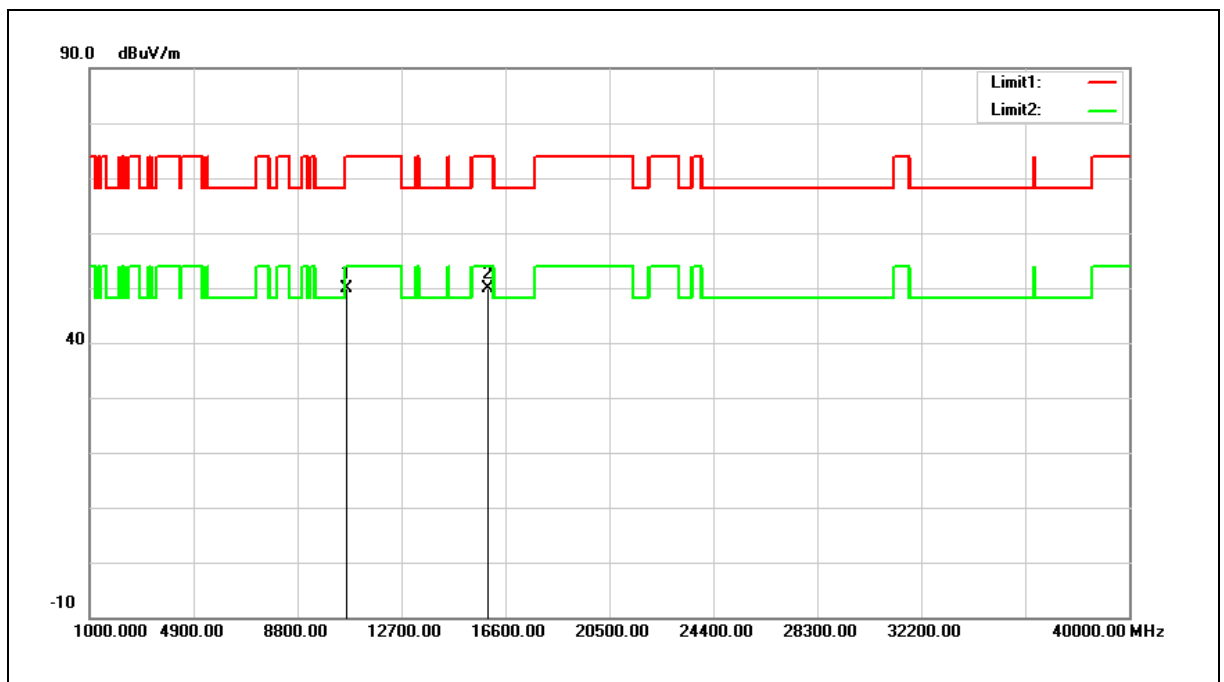


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	35.99	14.01	50.00	74.00	-24.00	peak
2	15960.000	35.34	14.58	49.92	74.00	-24.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

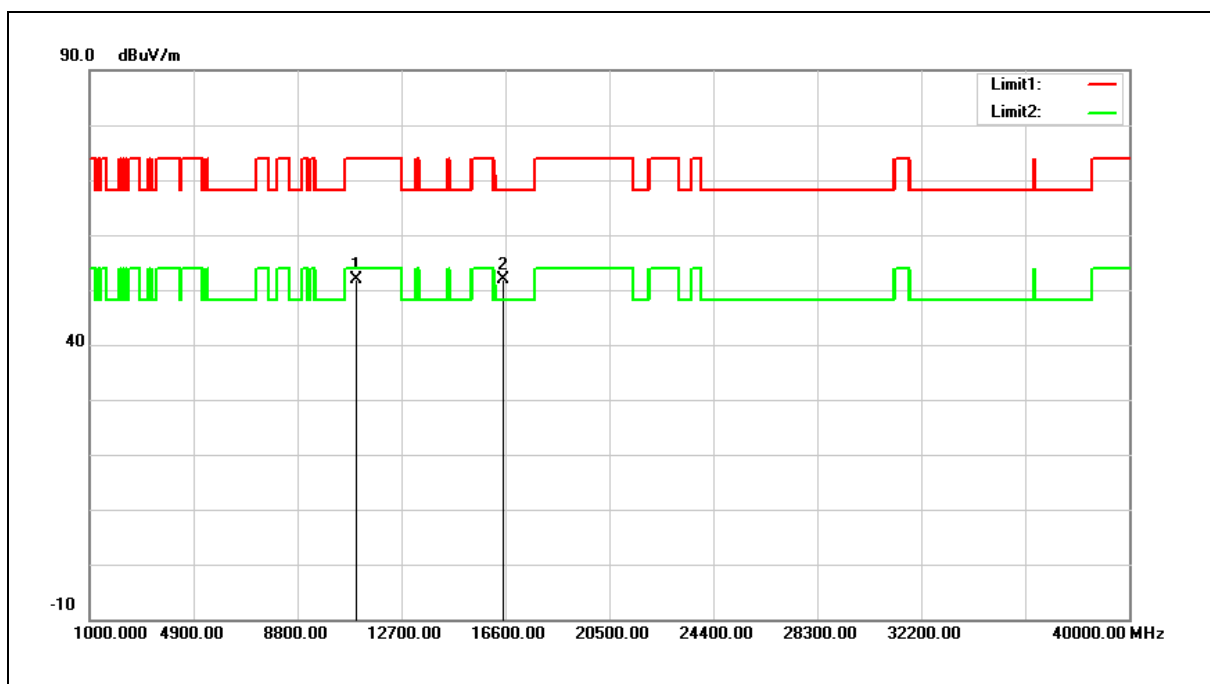


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	37.34	14.64	51.98	74.00	-22.02	peak
2	16500.000	36.32	15.51	51.83	68.20	-16.37	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

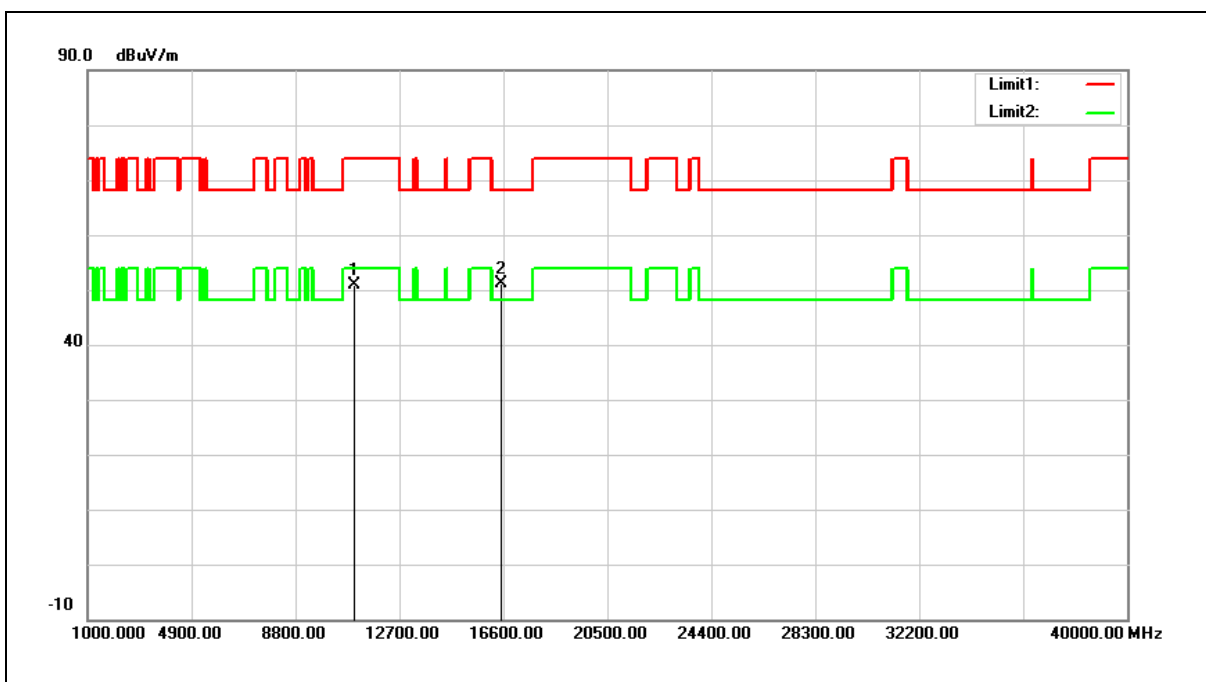


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	36.36	14.64	51.00	74.00	-23.00	peak
2	16500.000	35.72	15.51	51.23	68.20	-16.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

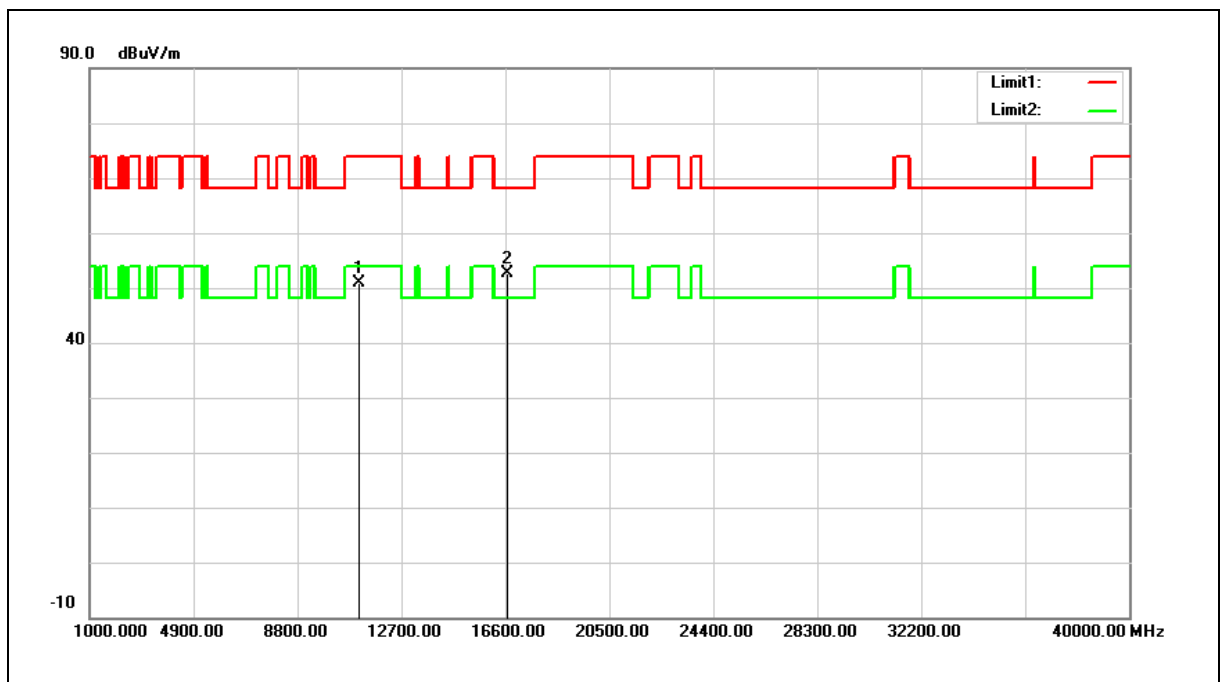


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	36.11	14.69	50.80	74.00	-23.20	peak
2	16680.000	35.98	16.61	52.59	68.20	-15.61	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

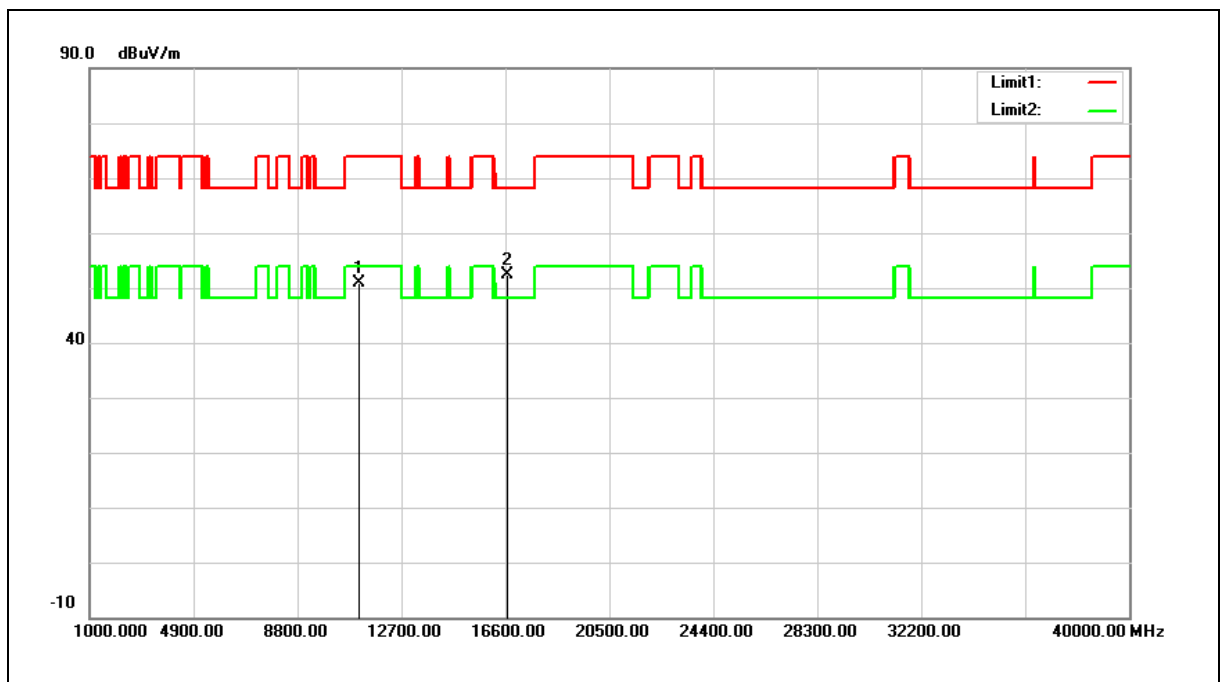


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	36.18	14.69	50.87	74.00	-23.13	peak
2	16680.000	35.75	16.61	52.36	68.20	-15.84	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

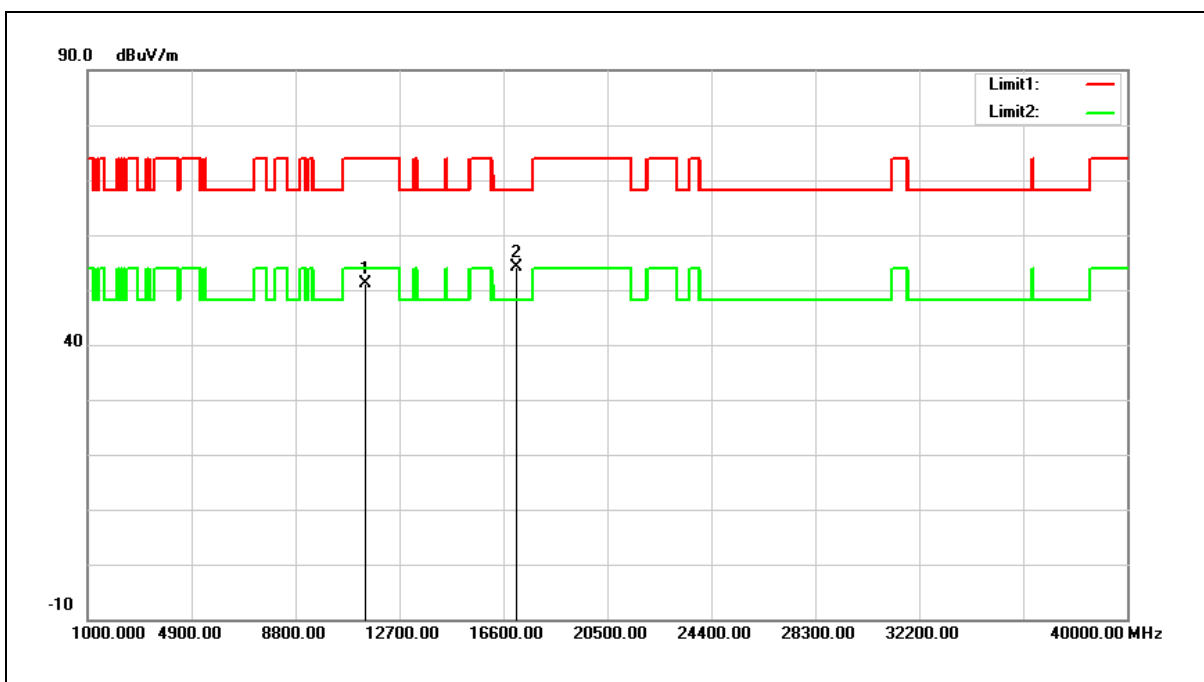


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	36.38	14.80	51.18	74.00	-22.82	peak
2	17100.000	35.02	19.11	54.13	68.20	-14.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

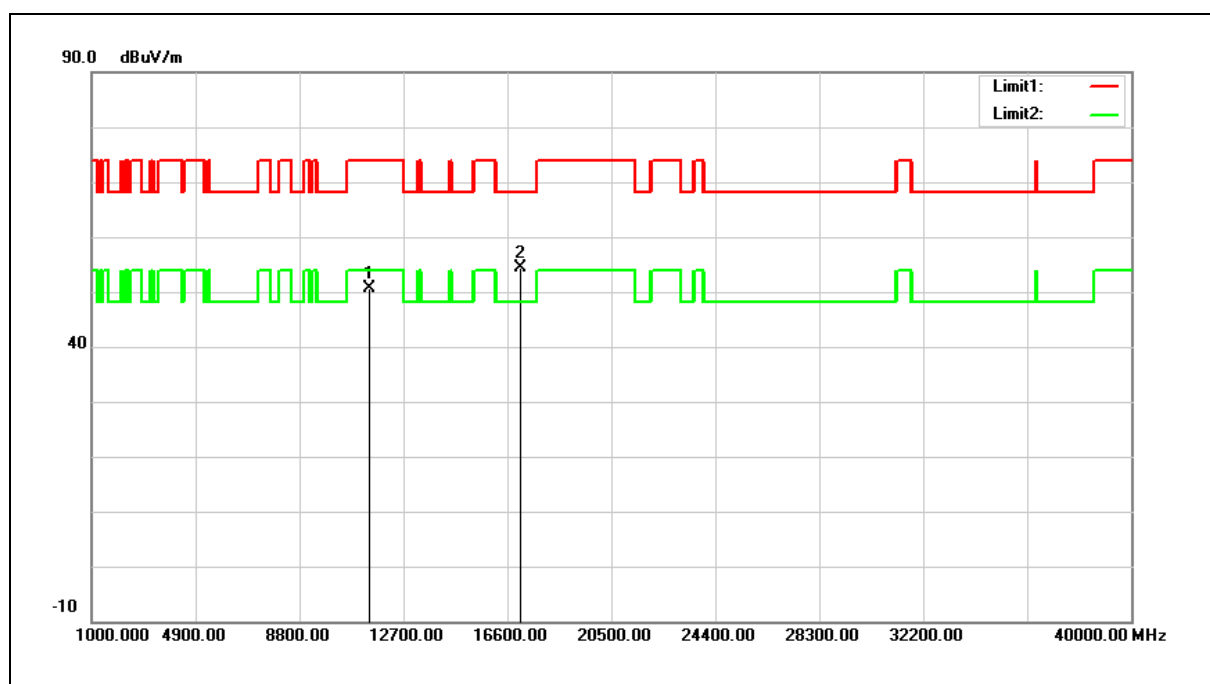


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	35.76	14.80	50.56	74.00	-23.44	peak
2	17100.000	35.18	19.11	54.29	68.20	-13.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

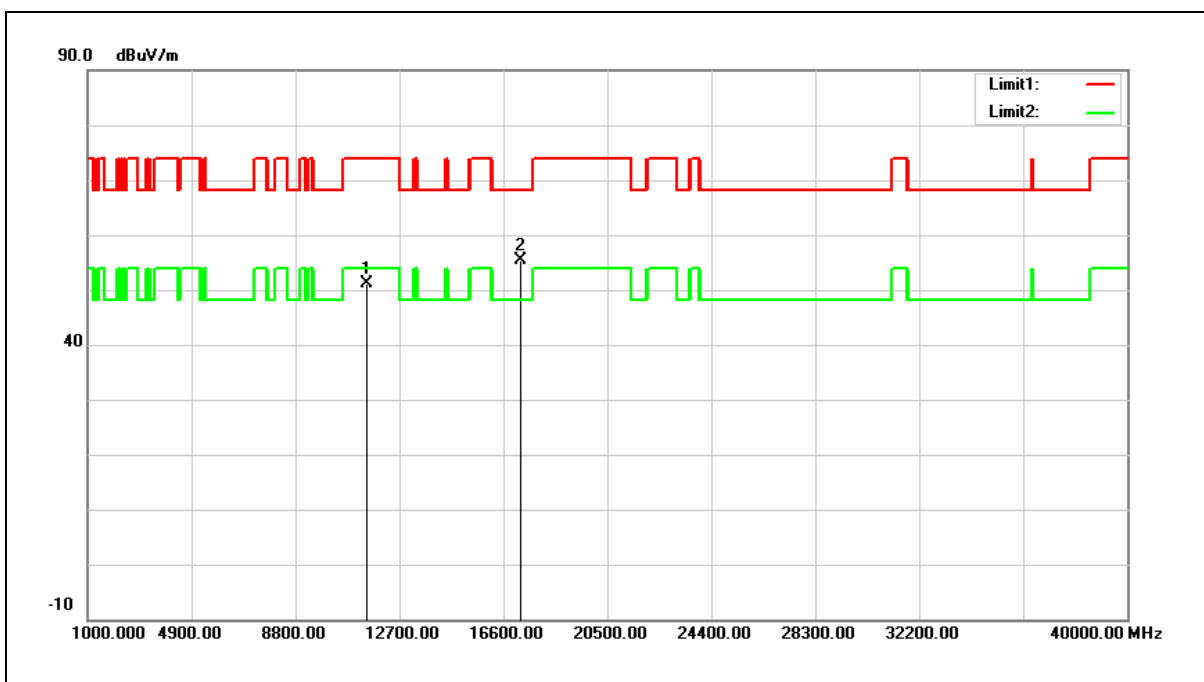


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	36.29	14.84	51.13	74.00	-22.87	peak
2	17235.000	35.59	19.84	55.43	68.20	-12.77	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

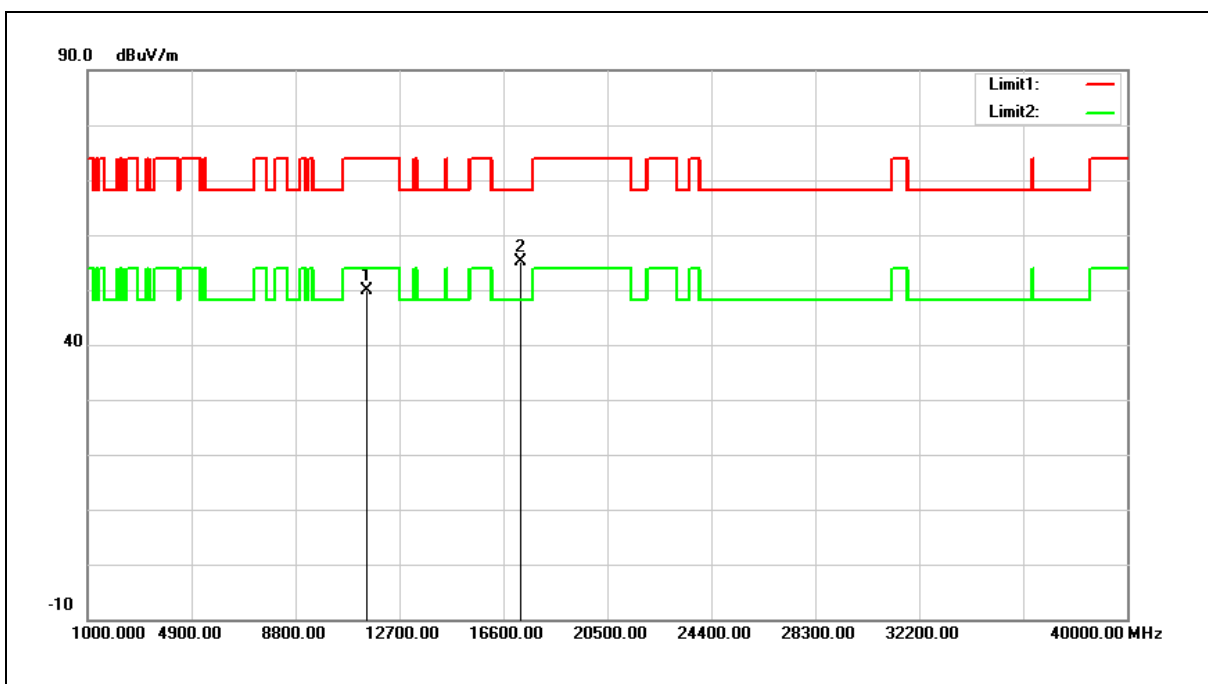


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.09	14.84	49.93	74.00	-24.07	peak
2	17235.000	35.33	19.84	55.17	68.20	-13.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

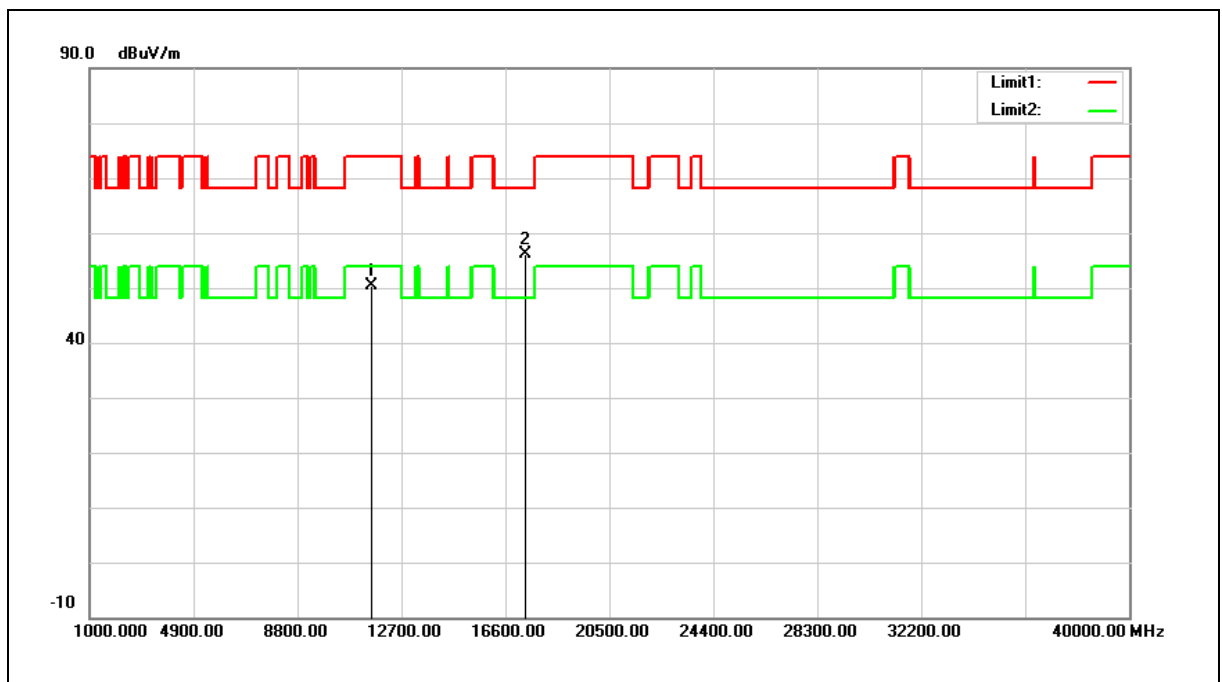


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.59	14.73	50.32	74.00	-23.68	peak
2	17355.000	35.73	20.49	56.22	68.20	-11.98	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

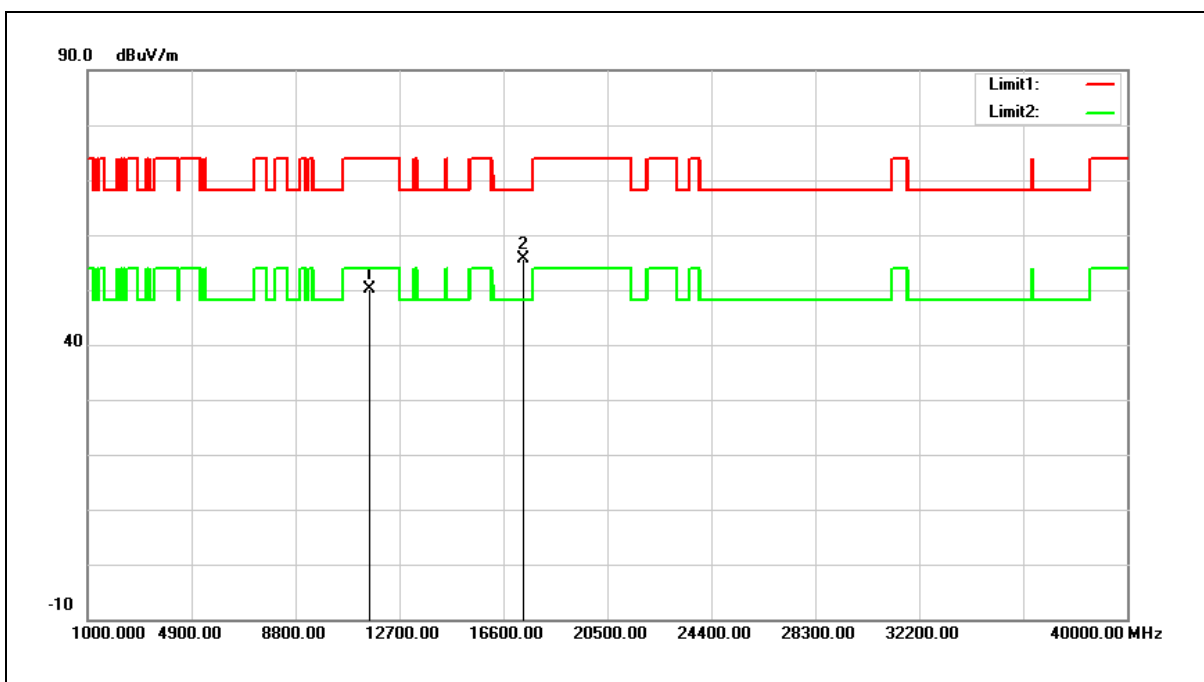


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.44	14.73	50.17	74.00	-23.83	peak
2	17355.000	35.15	20.49	55.64	68.20	-12.56	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

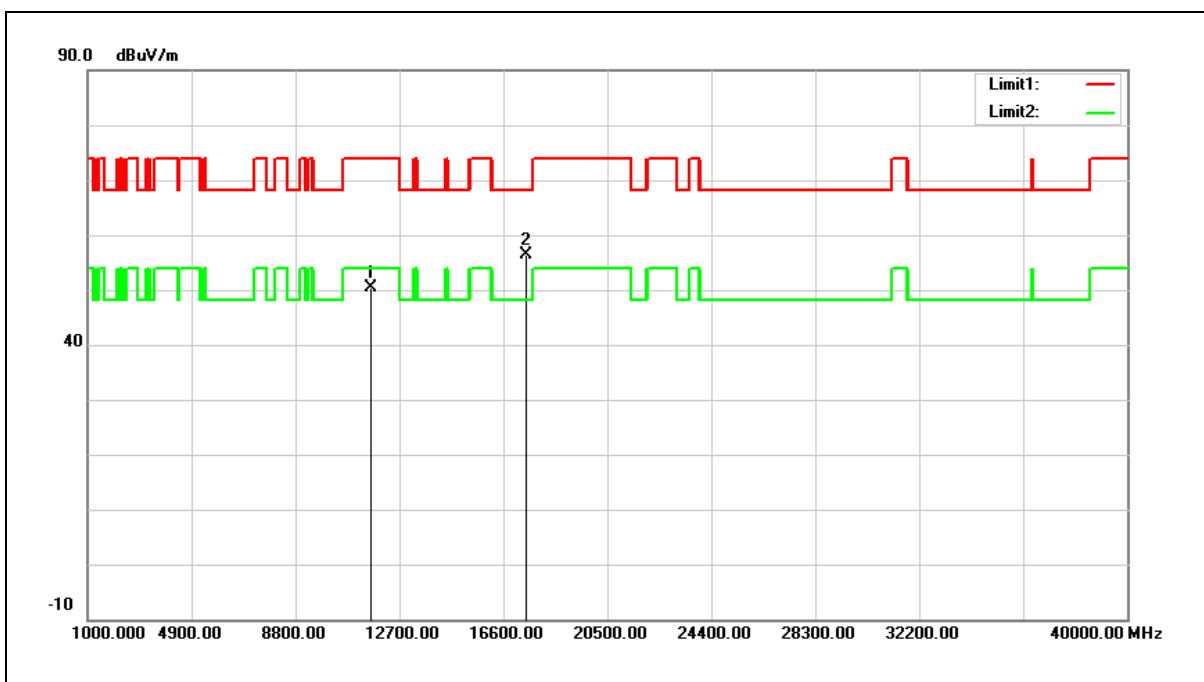


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.70	14.61	50.31	74.00	-23.69	peak
2	17475.000	35.25	21.14	56.39	68.20	-11.81	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

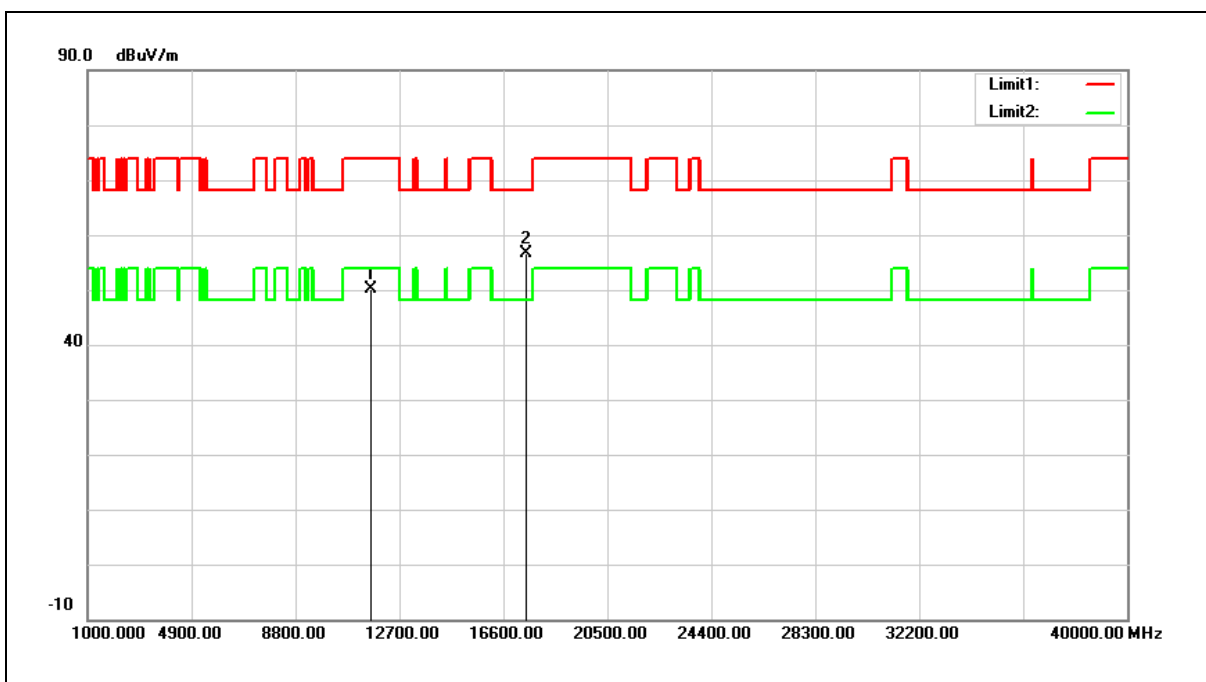


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.41	14.61	50.02	74.00	-23.98	peak
2	17475.000	35.44	21.14	56.58	68.20	-11.62	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

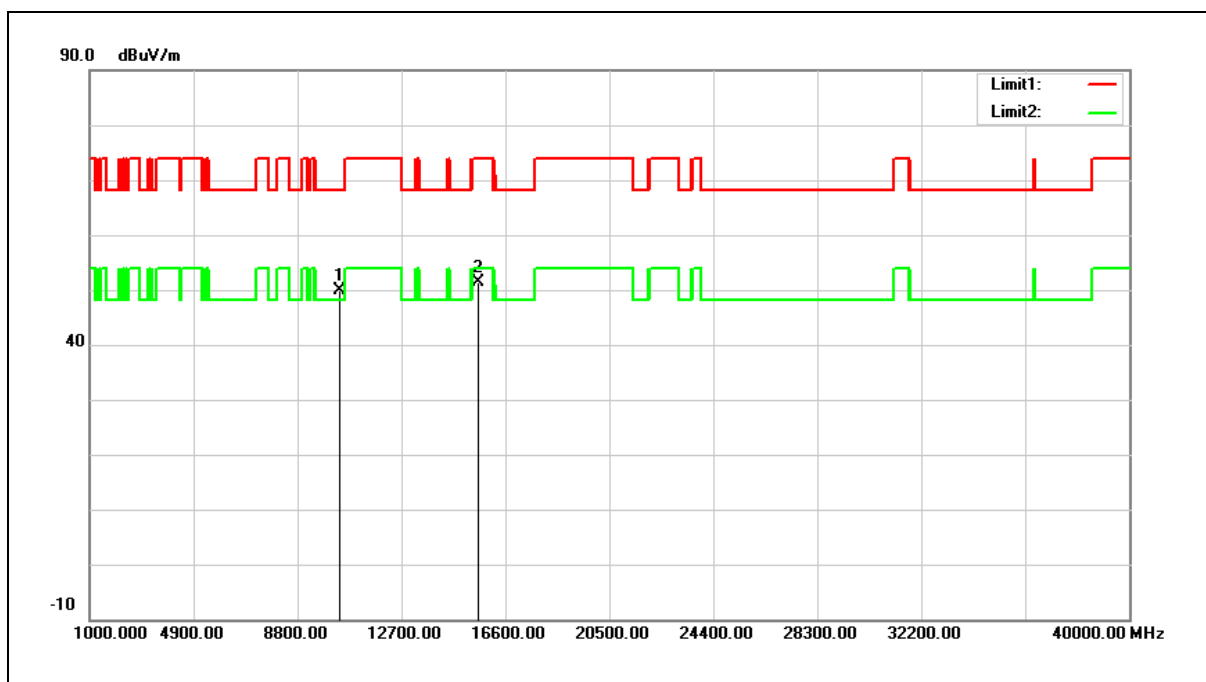


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	36.41	13.35	49.76	68.20	-18.44	peak
2	15570.000	35.69	15.72	51.41	74.00	-22.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

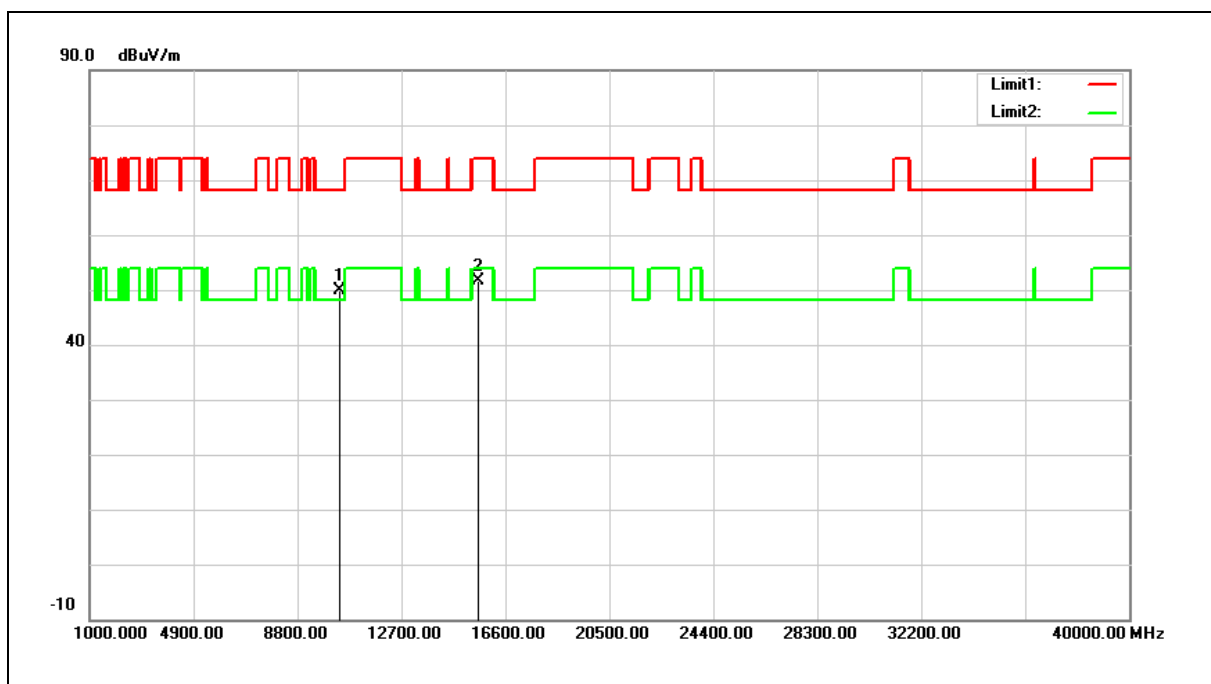


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	36.64	13.35	49.99	68.20	-18.21	peak
2	15570.000	35.93	15.72	51.65	74.00	-22.35	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

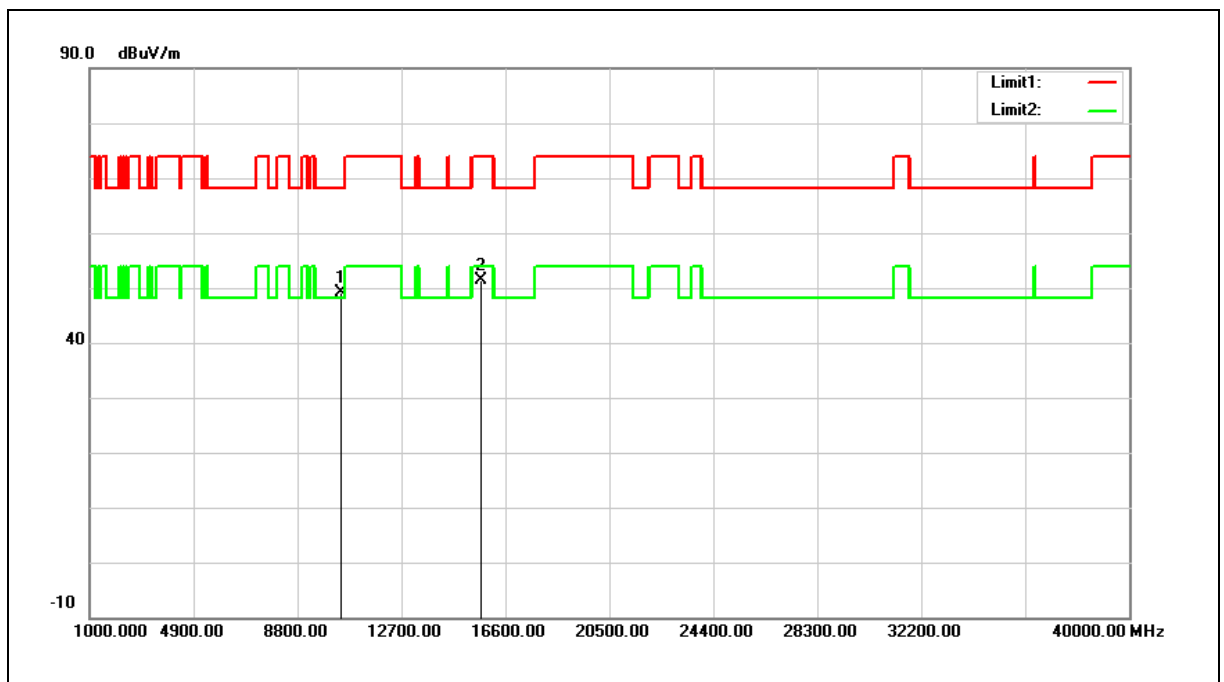


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	35.60	13.63	49.23	68.20	-18.97	peak
2	15690.000	35.90	15.36	51.26	74.00	-22.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

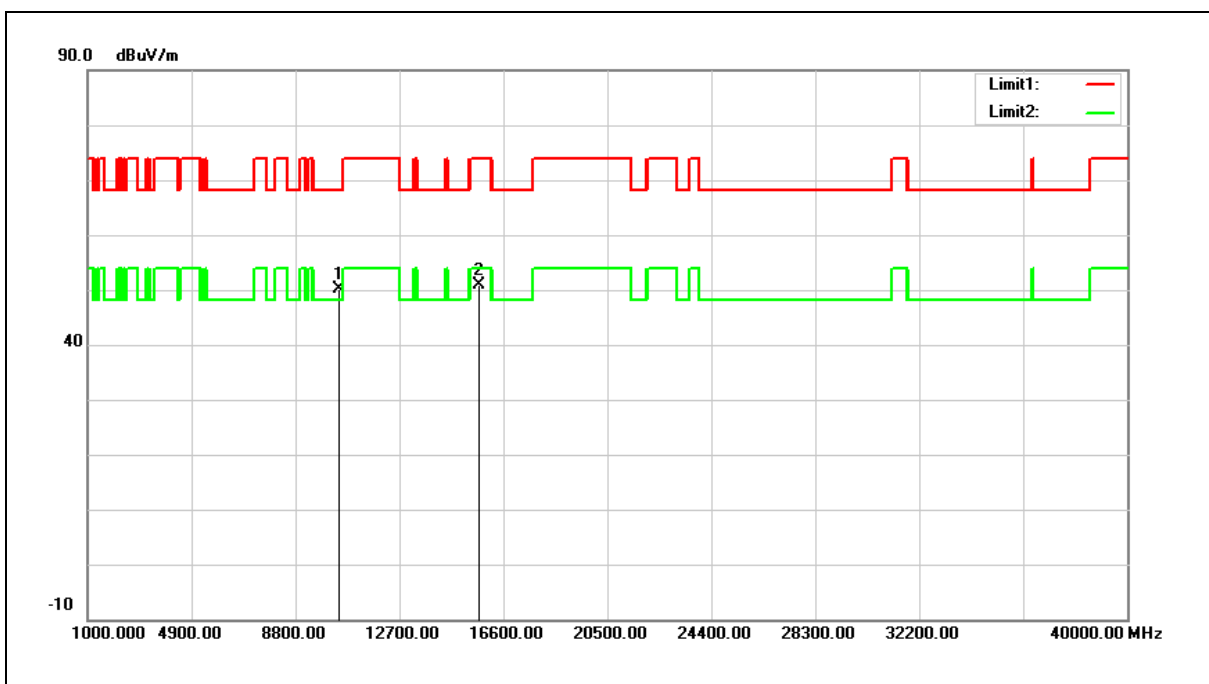


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	36.39	13.63	50.02	68.20	-18.18	peak
2	15690.000	35.43	15.36	50.79	74.00	-23.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5270 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

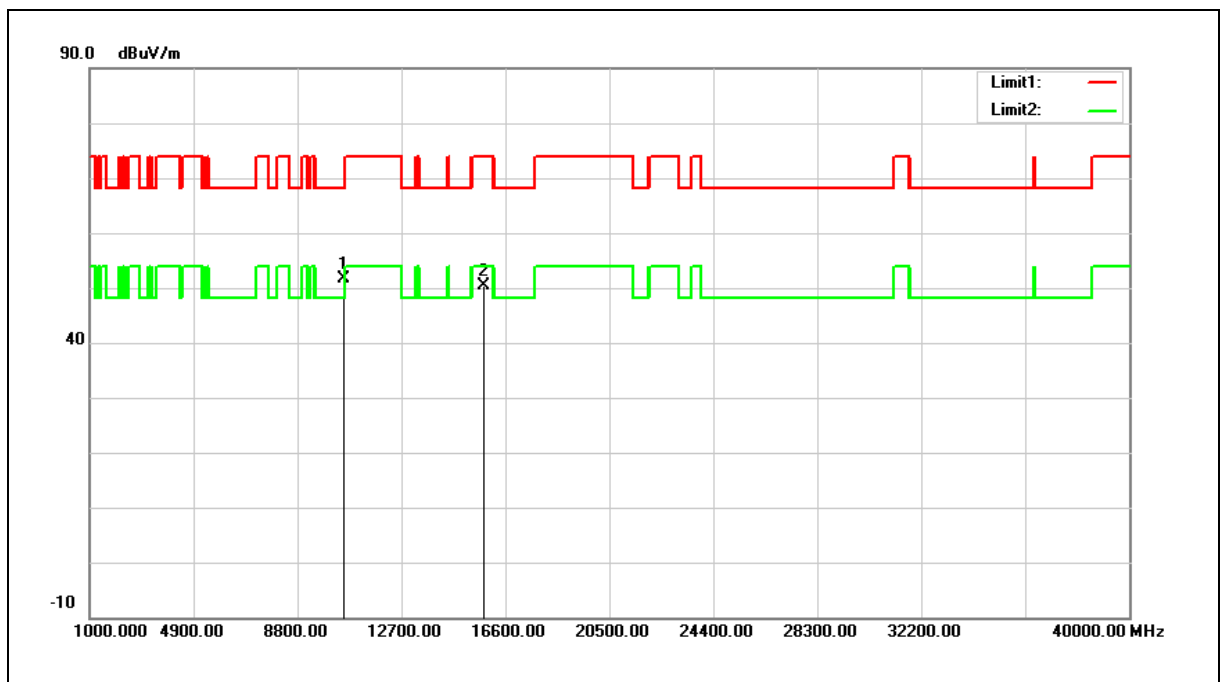


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	37.72	13.83	51.55	68.20	-16.65	peak
2	15810.000	35.41	15.02	50.43	74.00	-23.57	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5270 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

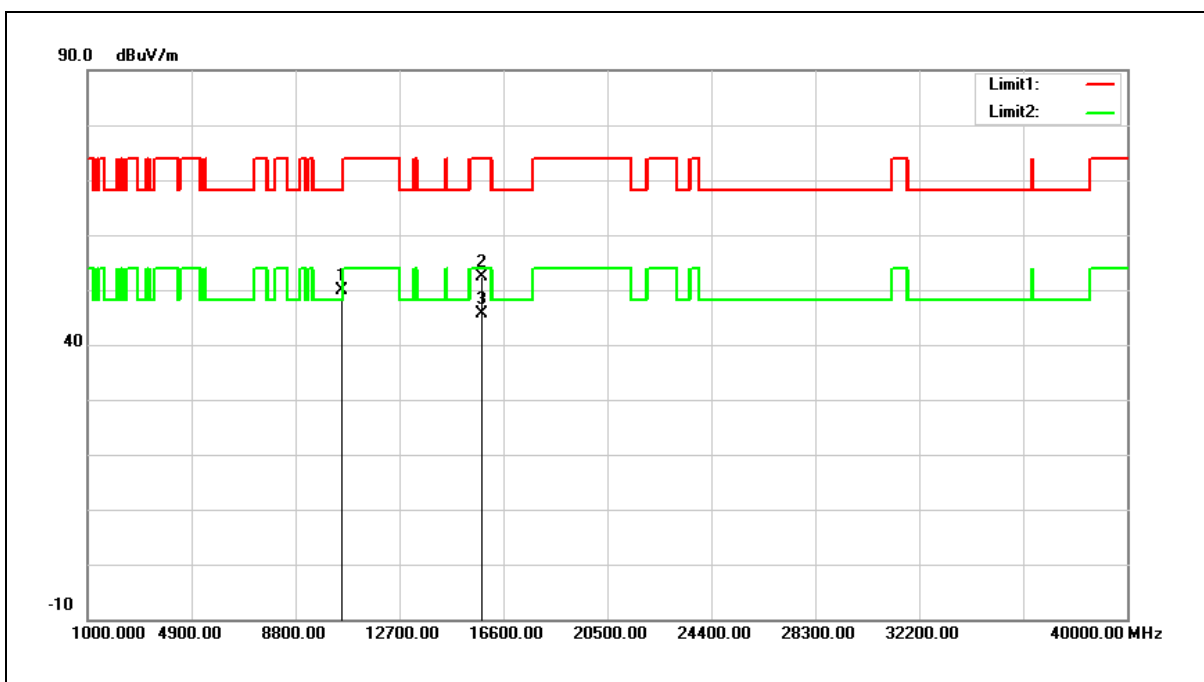


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	36.15	13.83	49.98	68.20	-18.22	peak
2	15810.000	37.34	15.02	52.36	74.00	-21.64	peak
3	15810.000	30.68	15.02	45.70	54.00	-8.30	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

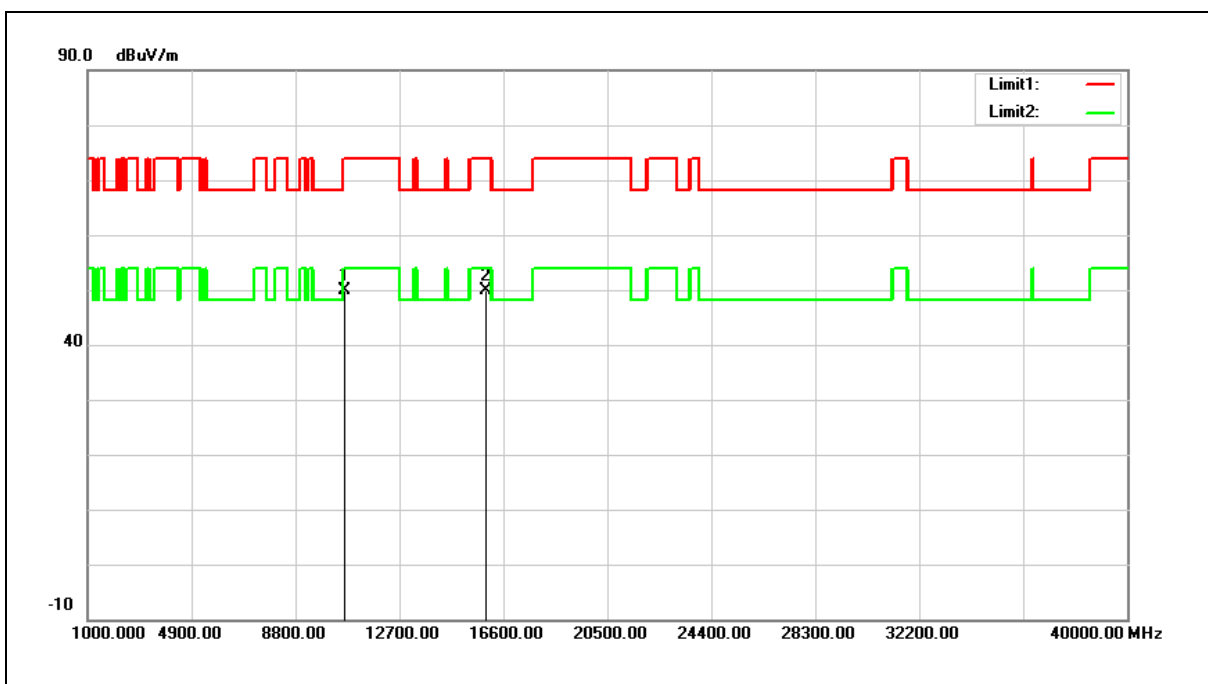


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	35.98	13.97	49.95	74.00	-24.05	peak
2	15930.000	35.34	14.66	50.00	74.00	-24.00	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

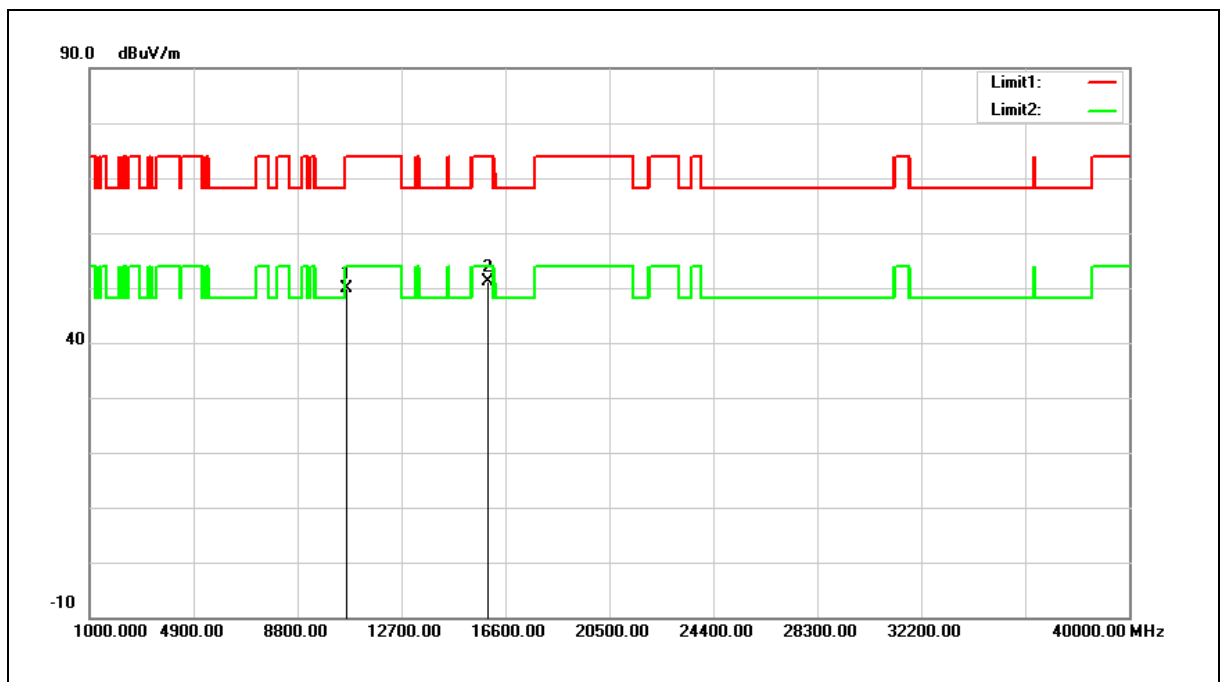


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	35.92	13.97	49.89	74.00	-24.11	peak
2	15930.000	36.43	14.66	51.09	74.00	-22.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

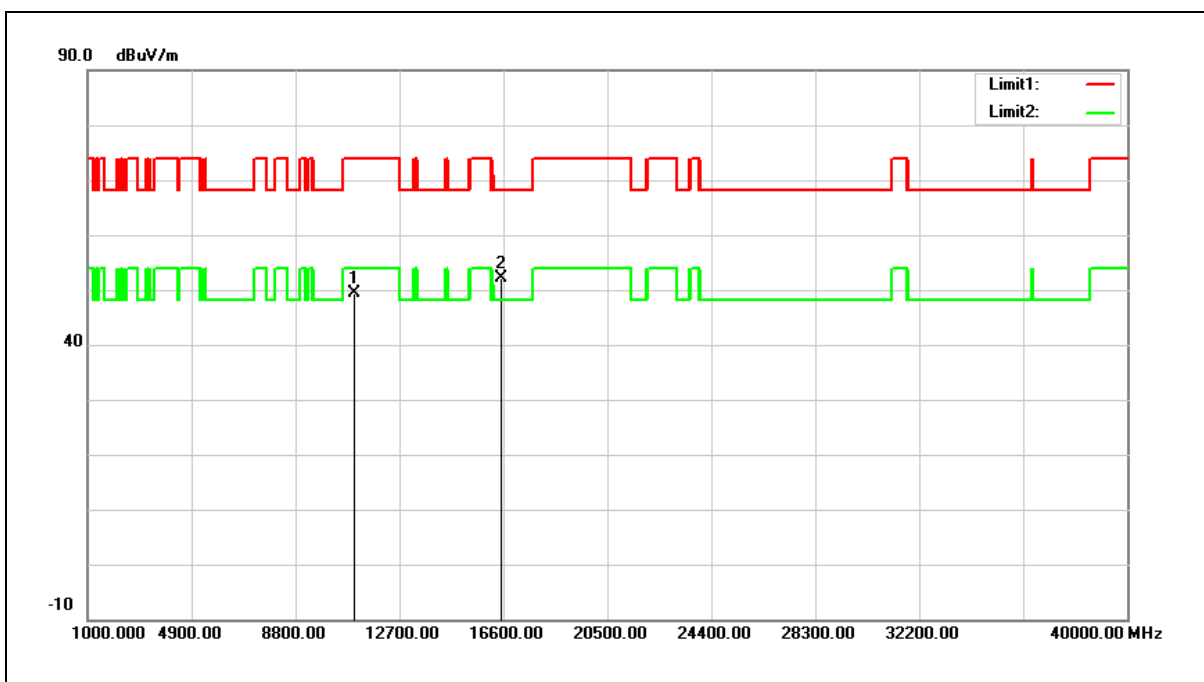


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	34.80	14.65	49.45	74.00	-24.55	peak
2	16530.000	36.39	15.69	52.08	68.20	-16.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

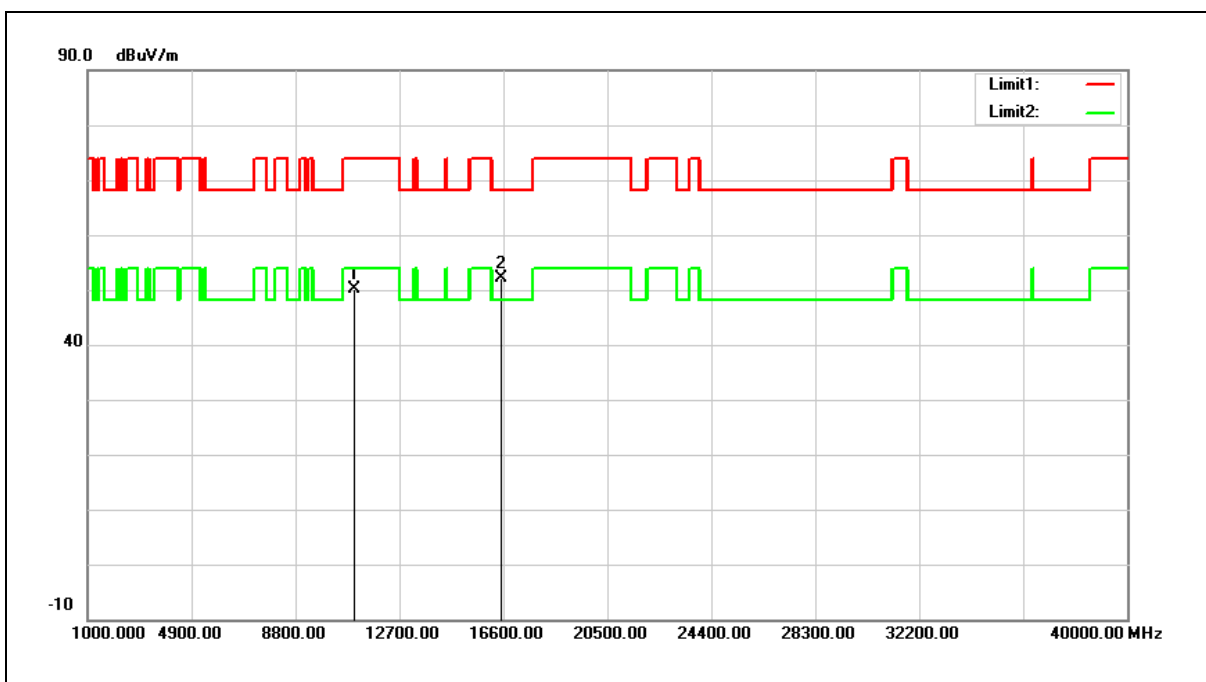


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	35.50	14.65	50.15	74.00	-23.85	peak
2	16530.000	36.45	15.69	52.14	68.20	-16.06	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5550 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

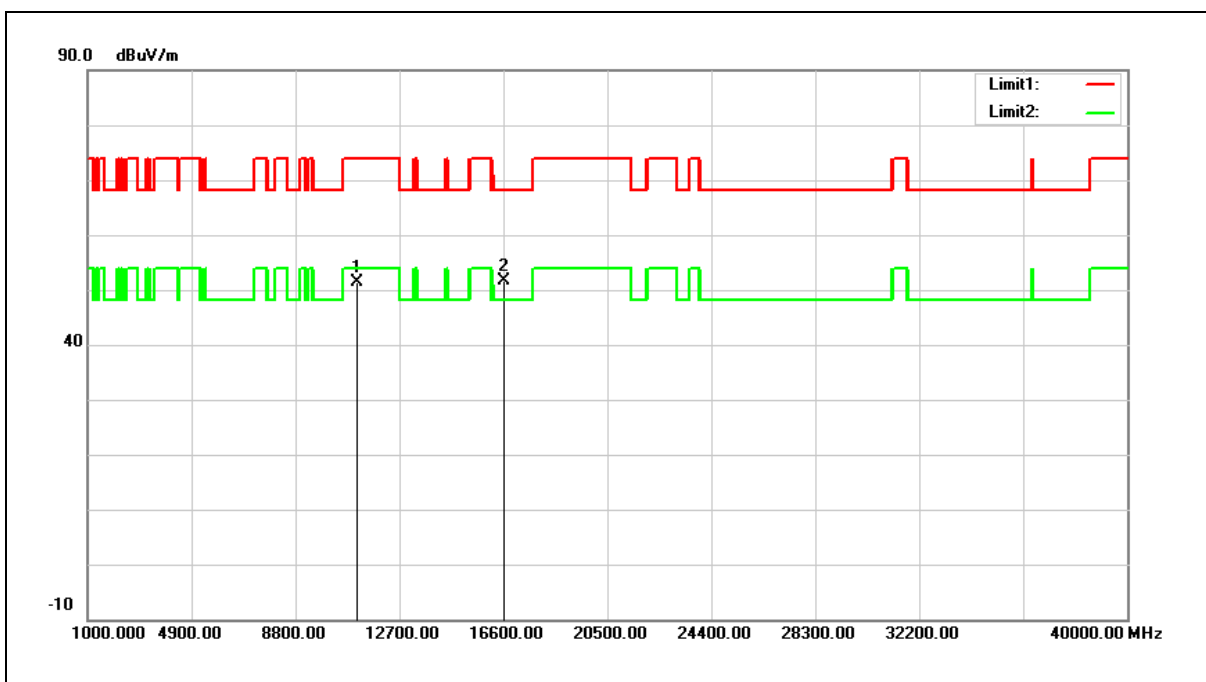


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	36.70	14.68	51.38	74.00	-22.62	peak
2	16650.000	35.25	16.42	51.67	68.20	-16.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5550 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

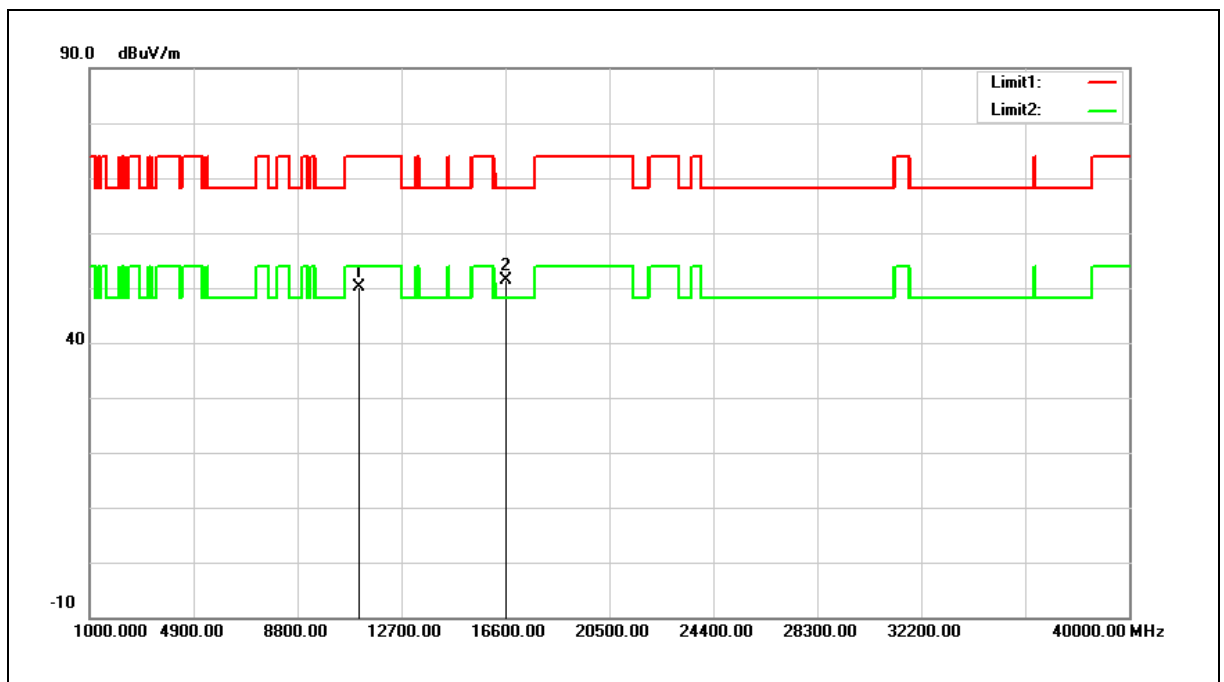


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	35.49	14.68	50.17	74.00	-23.83	peak
2	16650.000	35.07	16.42	51.49	68.20	-16.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

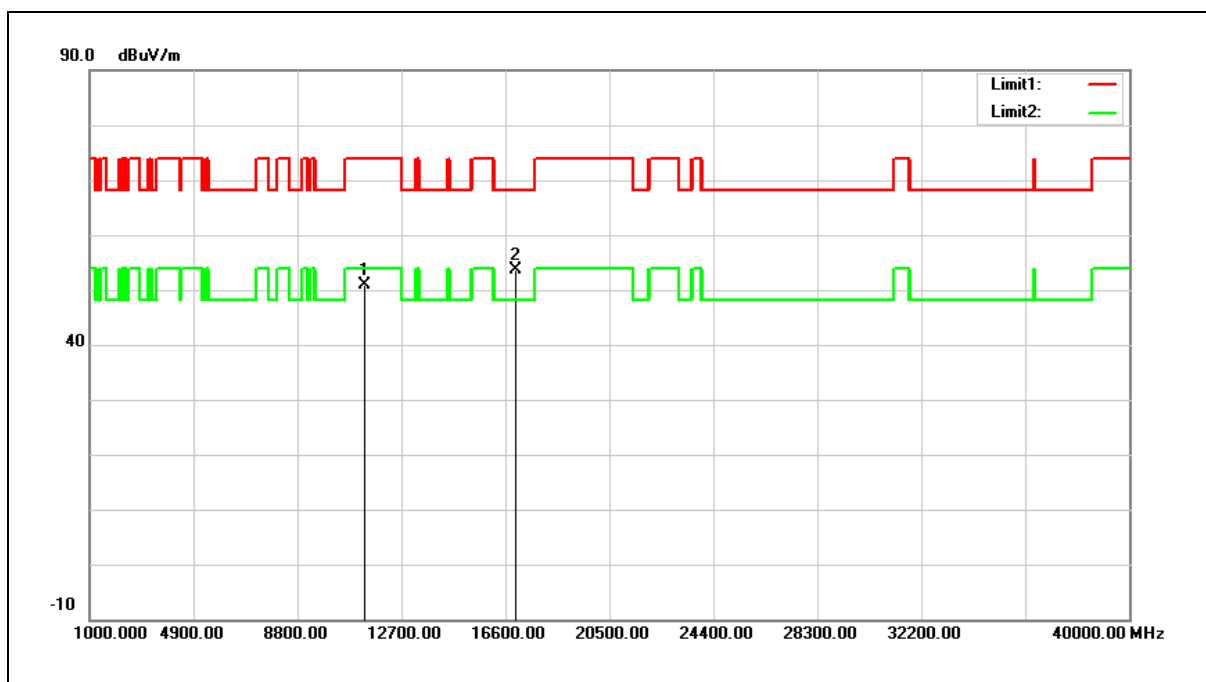


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	36.09	14.78	50.87	74.00	-23.13	peak
2	17010.000	34.98	18.62	53.60	68.20	-14.60	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

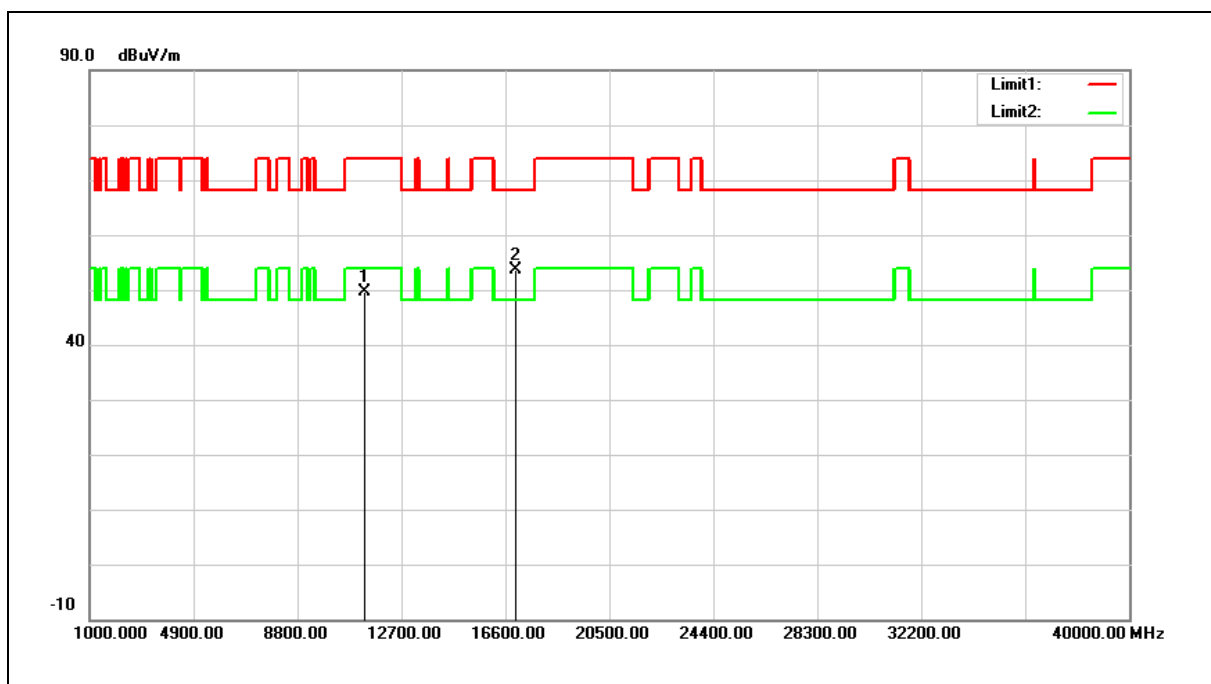


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	34.83	14.78	49.61	74.00	-24.39	peak
2	17010.000	34.91	18.62	53.53	68.20	-14.67	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

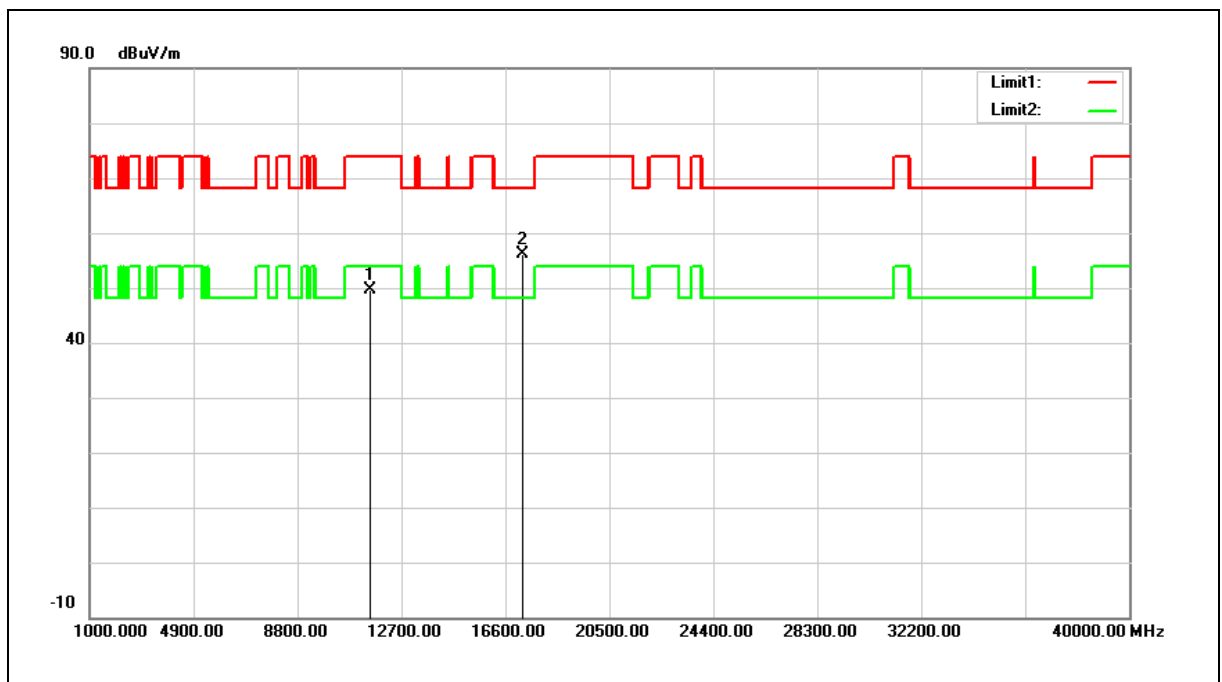


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	34.81	14.83	49.64	74.00	-24.36	peak
2	17265.000	36.24	20.00	56.24	68.20	-11.96	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

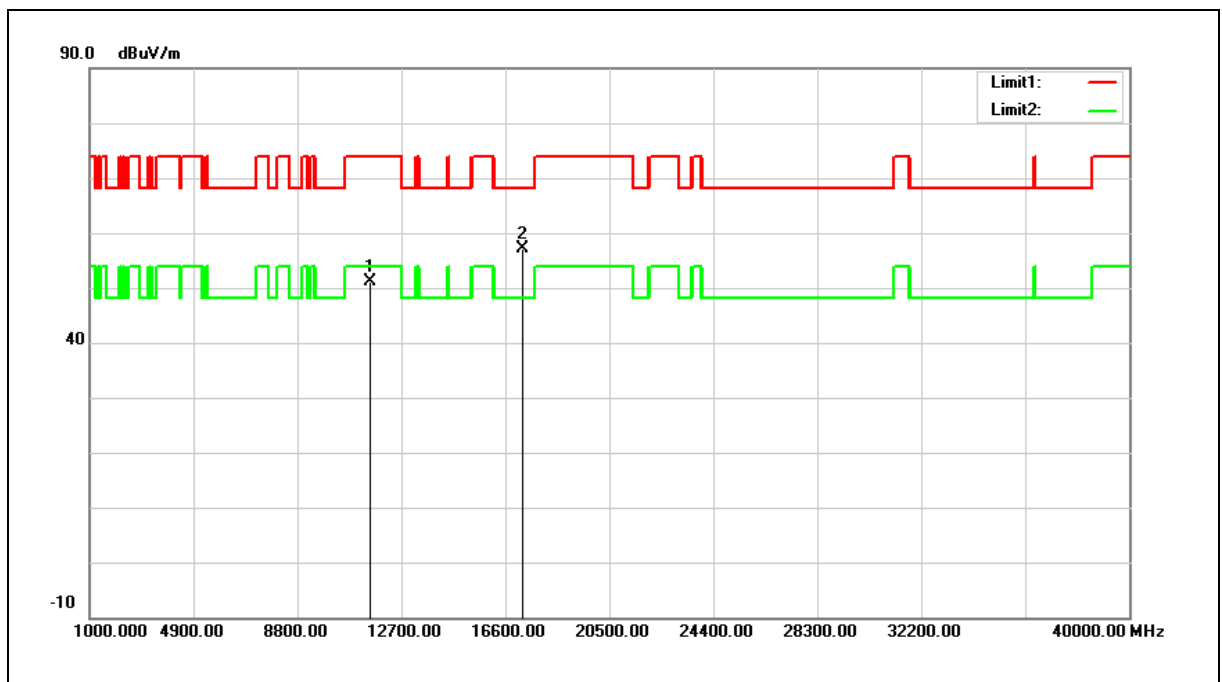


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	36.22	14.83	51.05	74.00	-22.95	peak
2	17265.000	37.11	20.00	57.11	68.20	-11.09	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

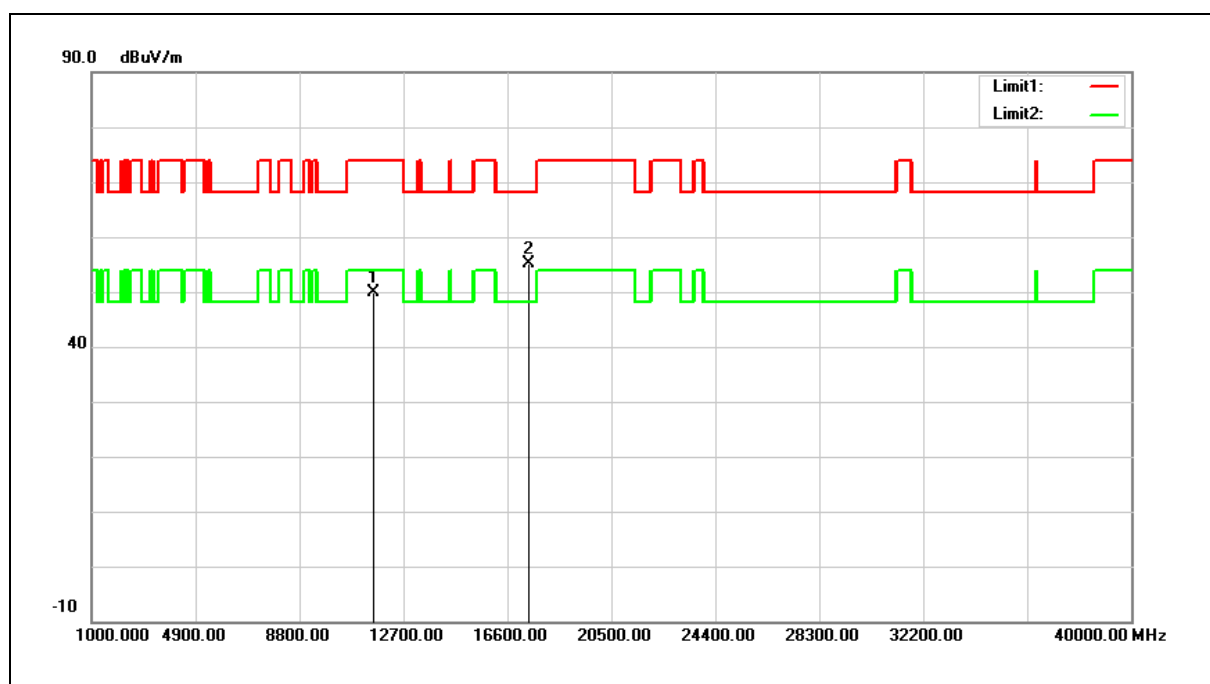


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	35.10	14.70	49.80	74.00	-24.20	peak
2	17385.000	34.48	20.65	55.13	68.20	-13.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

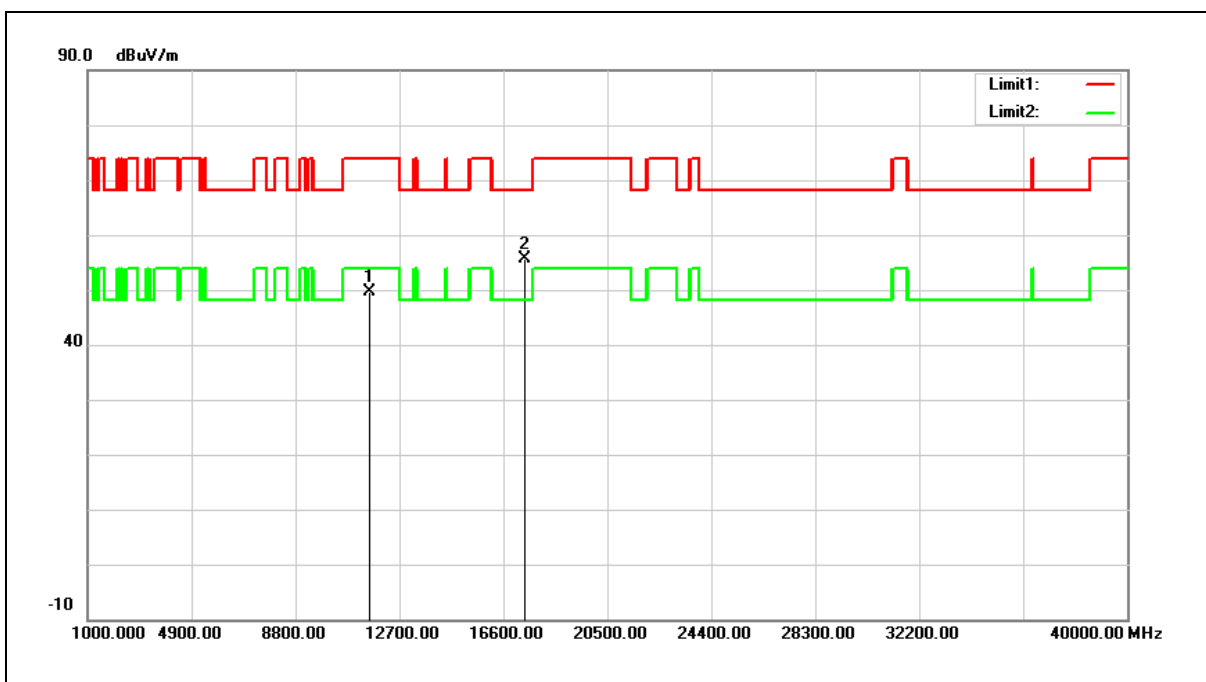


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	34.84	14.70	49.54	74.00	-24.46	peak
2	17385.000	34.92	20.65	55.57	68.20	-12.63	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

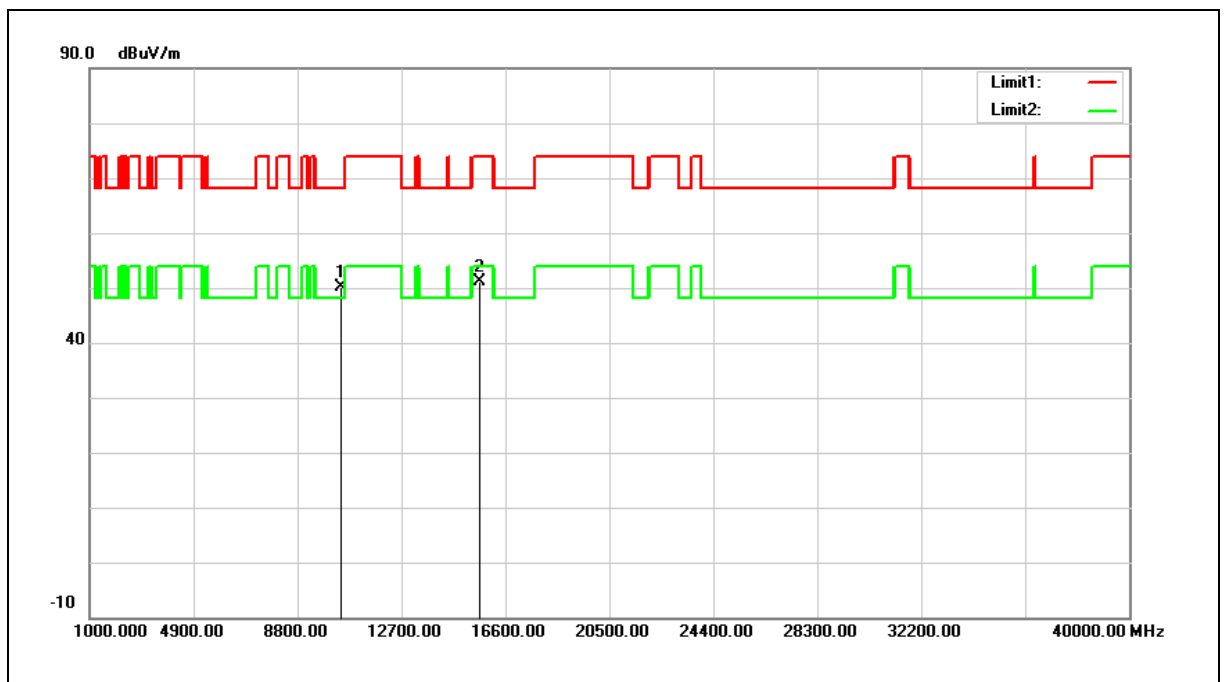


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	36.71	13.49	50.20	68.20	-18.00	peak
2	15630.000	35.63	15.55	51.18	74.00	-22.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

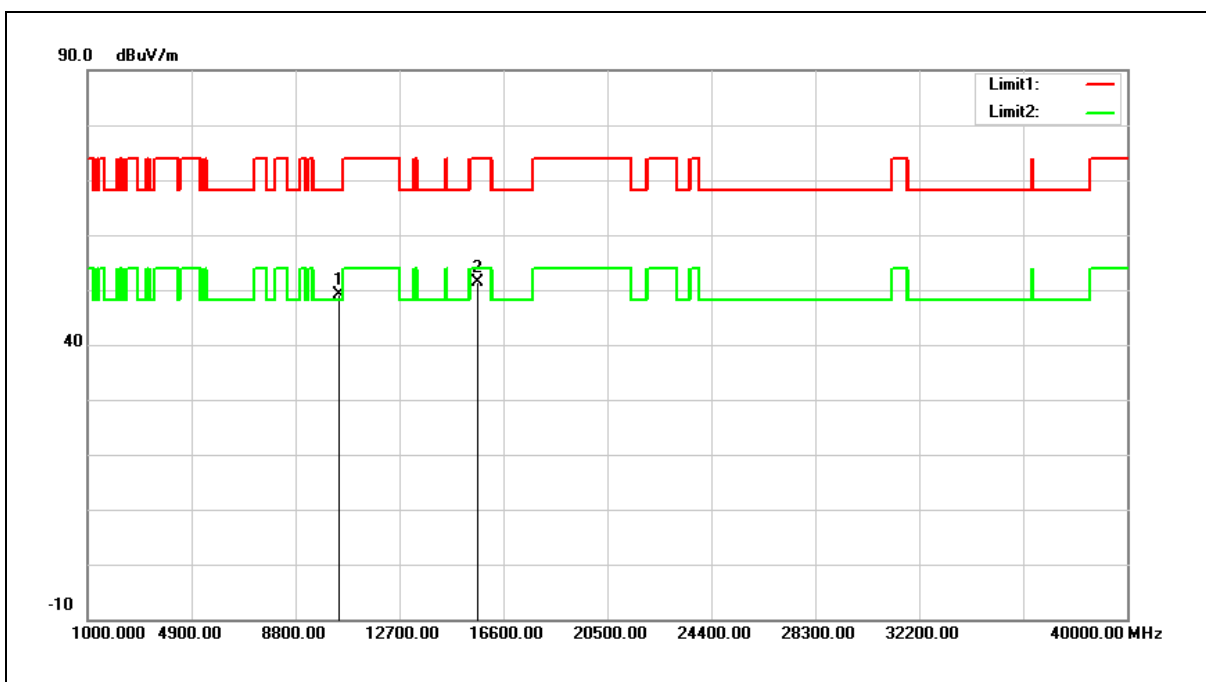


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	35.61	13.49	49.10	68.20	-19.10	peak
2	15630.000	35.94	15.55	51.49	74.00	-22.51	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

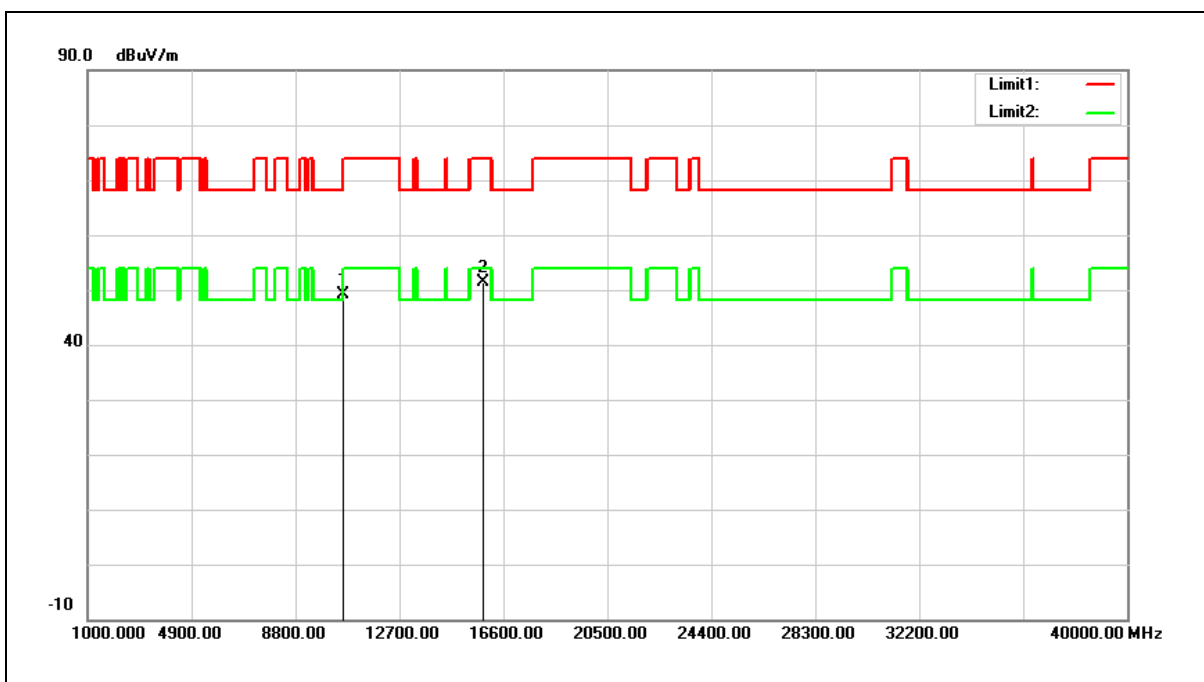


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	35.26	13.91	49.17	68.20	-19.03	peak
2	15870.000	36.56	14.84	51.40	74.00	-22.60	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

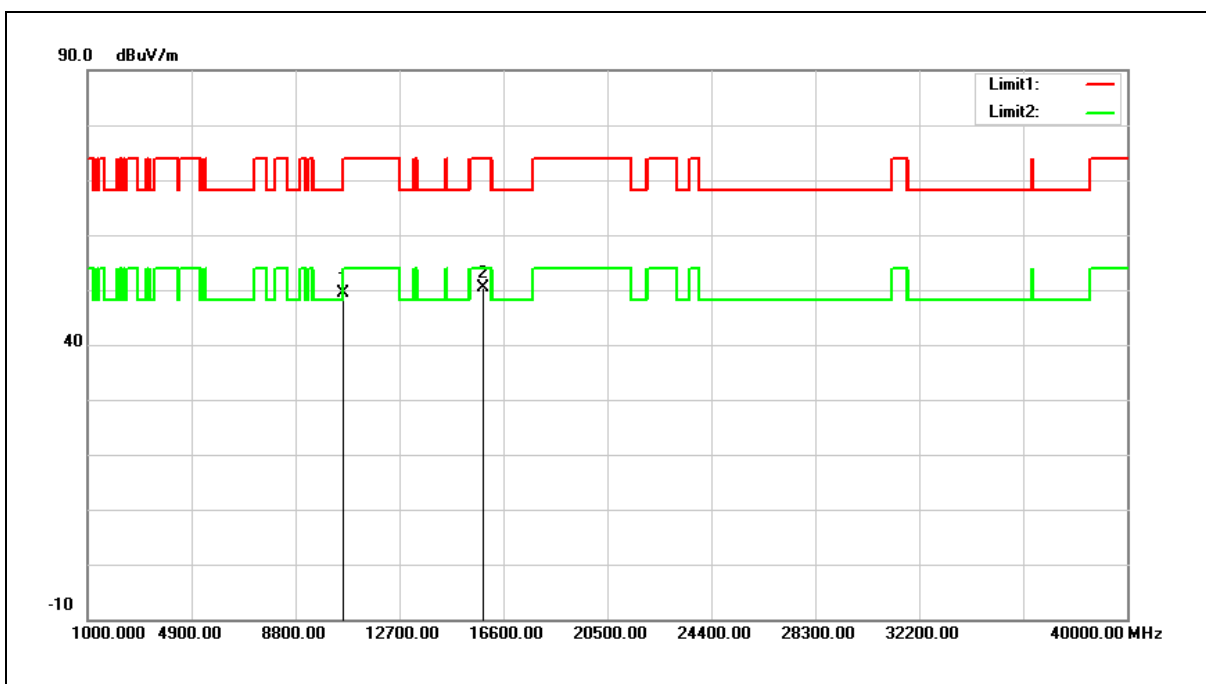


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	35.41	13.91	49.32	68.20	-18.88	peak
2	15870.000	35.57	14.84	50.41	74.00	-23.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

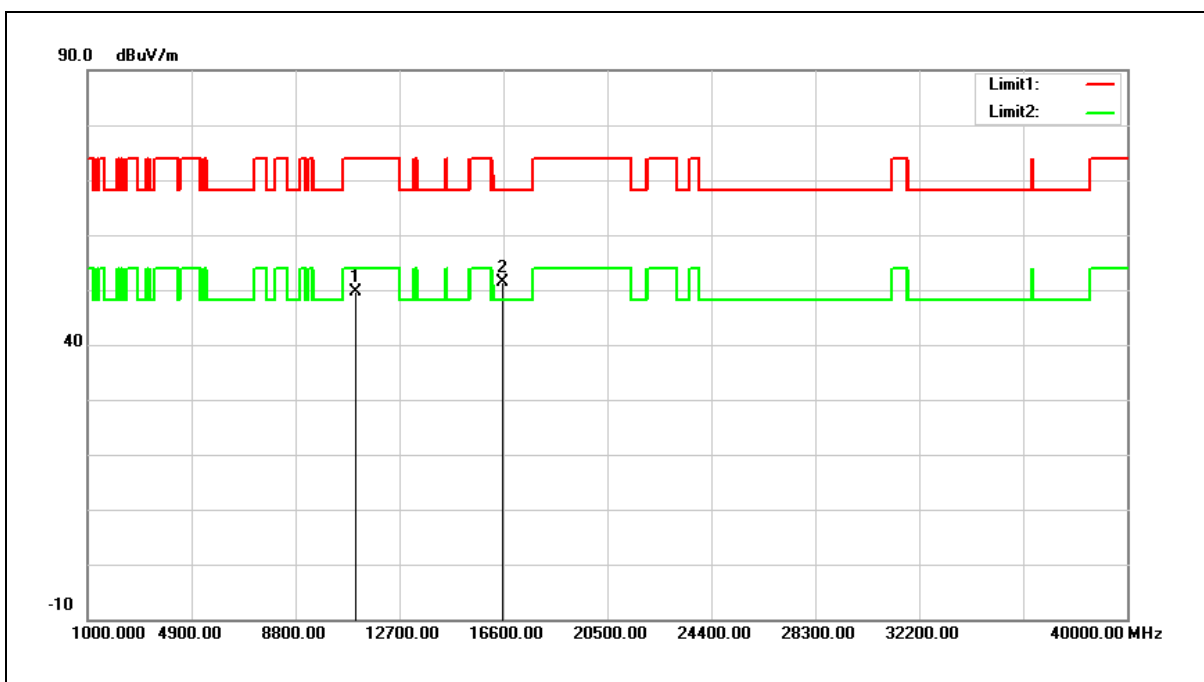


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	35.00	14.66	49.66	74.00	-24.34	peak
2	16590.000	35.29	16.06	51.35	68.20	-16.85	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

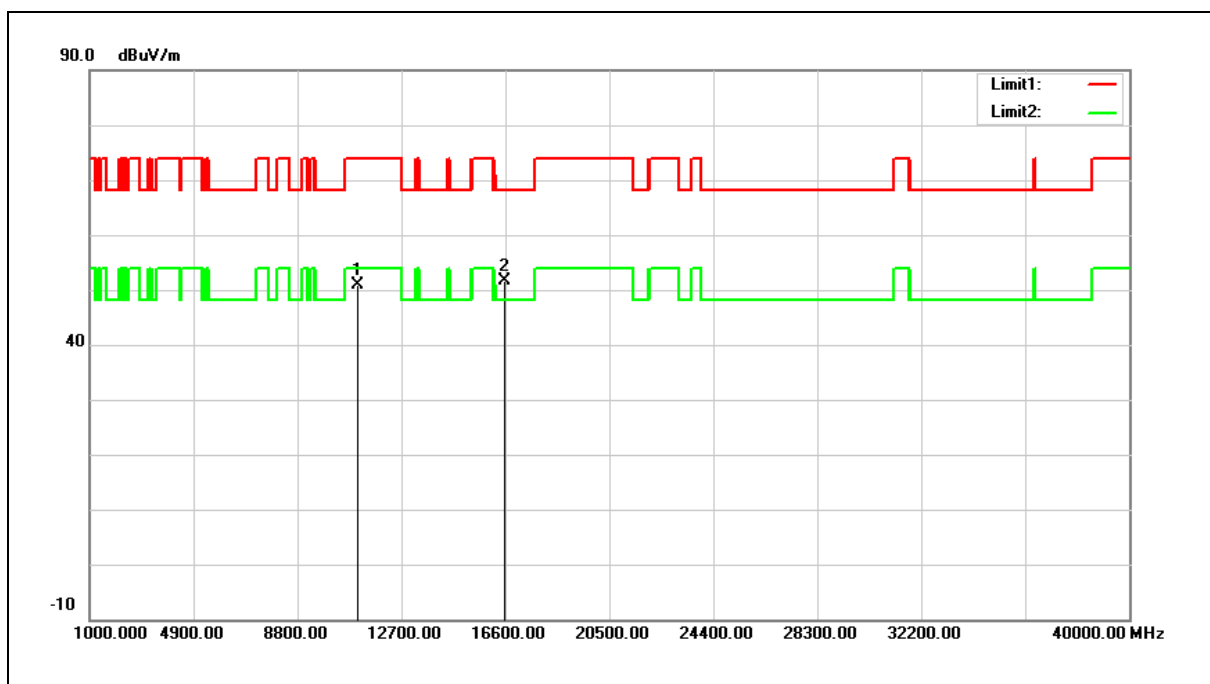


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	36.14	14.66	50.80	74.00	-23.20	peak
2	16590.000	35.51	16.06	51.57	68.20	-16.63	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

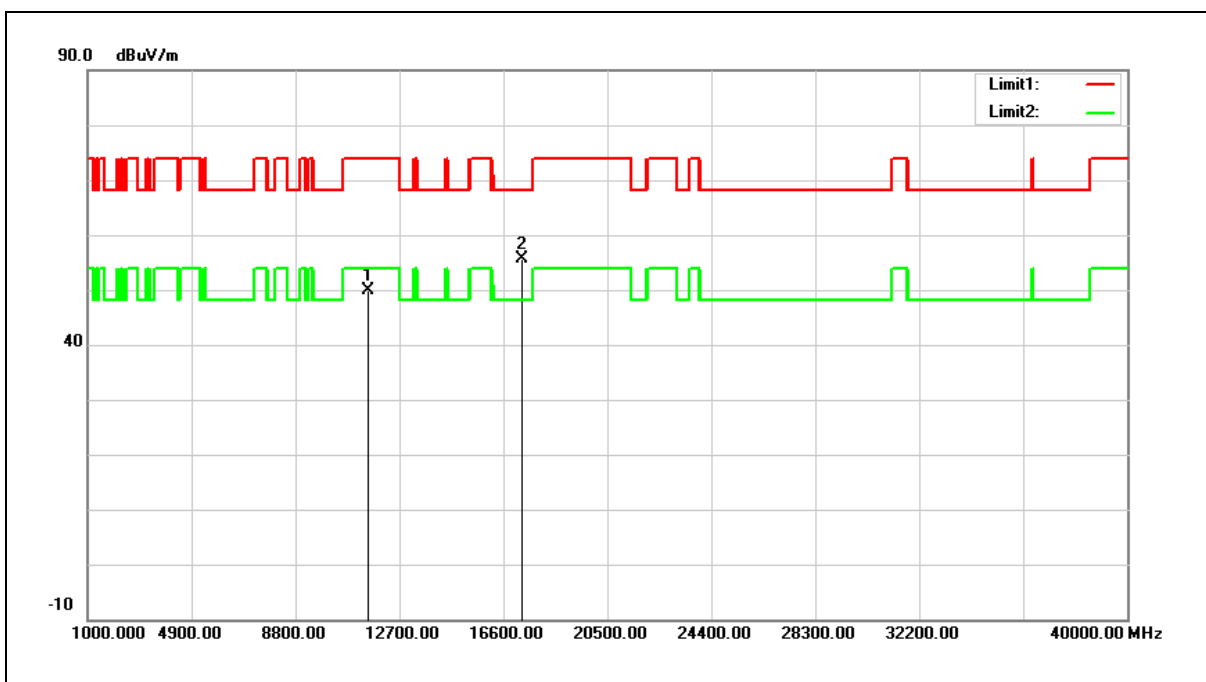


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	35.04	14.77	49.81	74.00	-24.19	peak
2	17325.000	35.21	20.32	55.53	68.20	-12.67	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

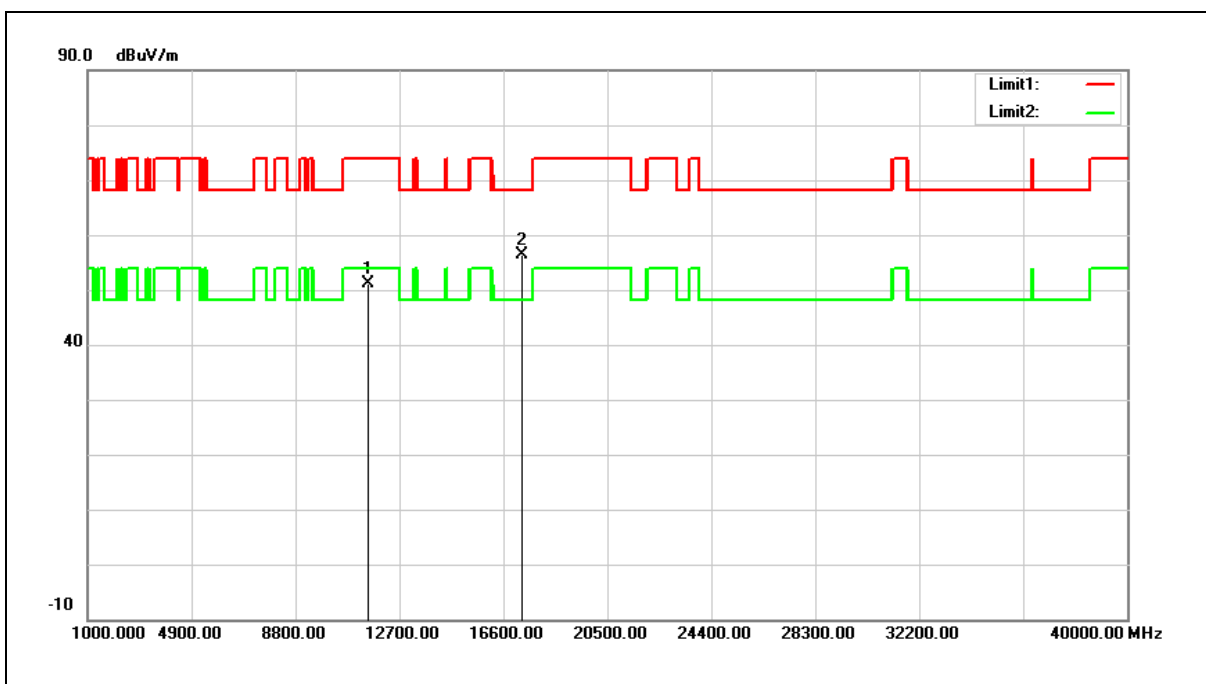


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	36.26	14.77	51.03	74.00	-22.97	peak
2	17325.000	36.07	20.32	56.39	68.20	-11.81	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting		
	(WLAN 5 GHz + BT)		
Ant.Polar.:	Horizontal		

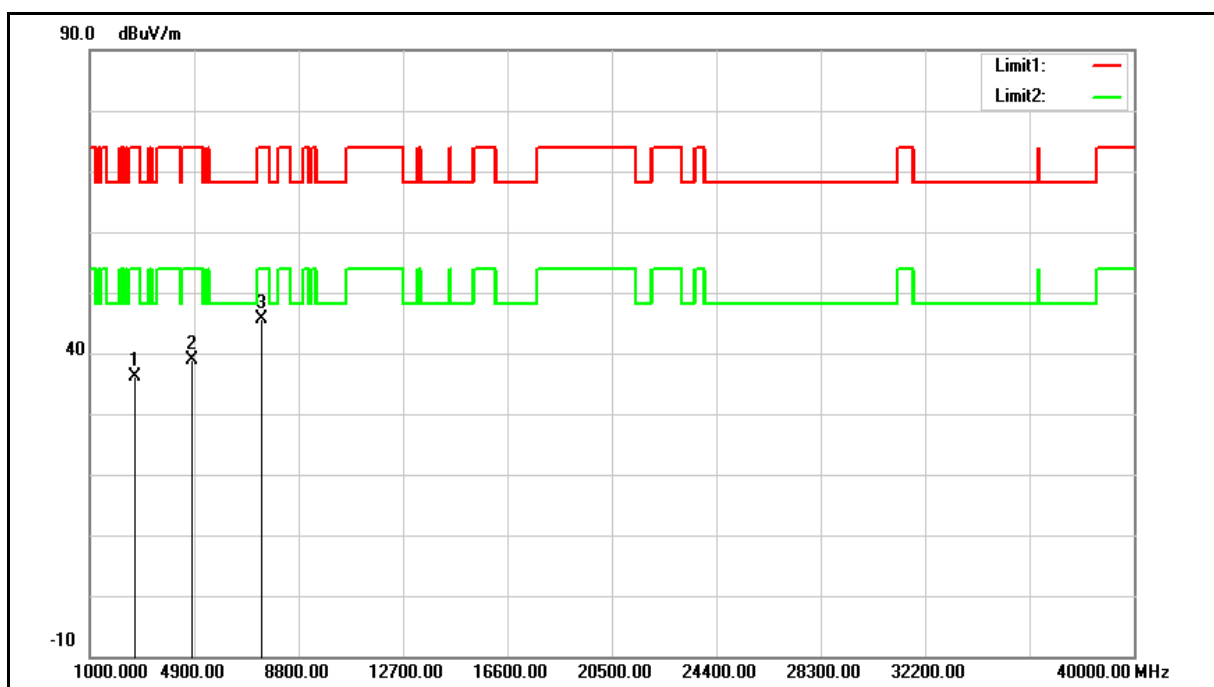


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2666.000	38.41	-2.28	36.13	74.00	-37.87	peak
2	4842.000	35.92	2.88	38.80	74.00	-35.20	peak
3	7409.000	36.12	9.46	45.58	74.00	-28.42	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting		
	(WLAN 5 GHz + BT)		
Ant.Polar.:	Vertical		

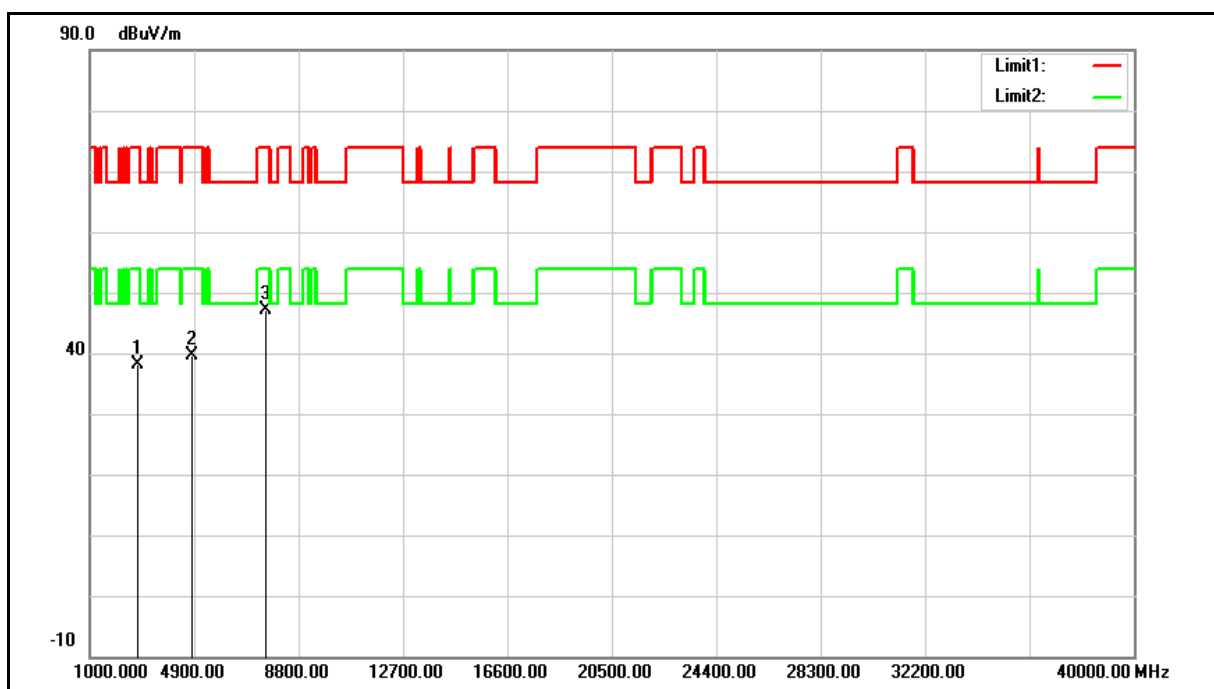


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2785.000	39.95	-1.83	38.12	74.00	-35.88	peak
2	4825.000	36.70	2.85	39.55	74.00	-34.45	peak
3	7562.000	37.42	9.81	47.23	74.00	-26.77	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		
Description:			

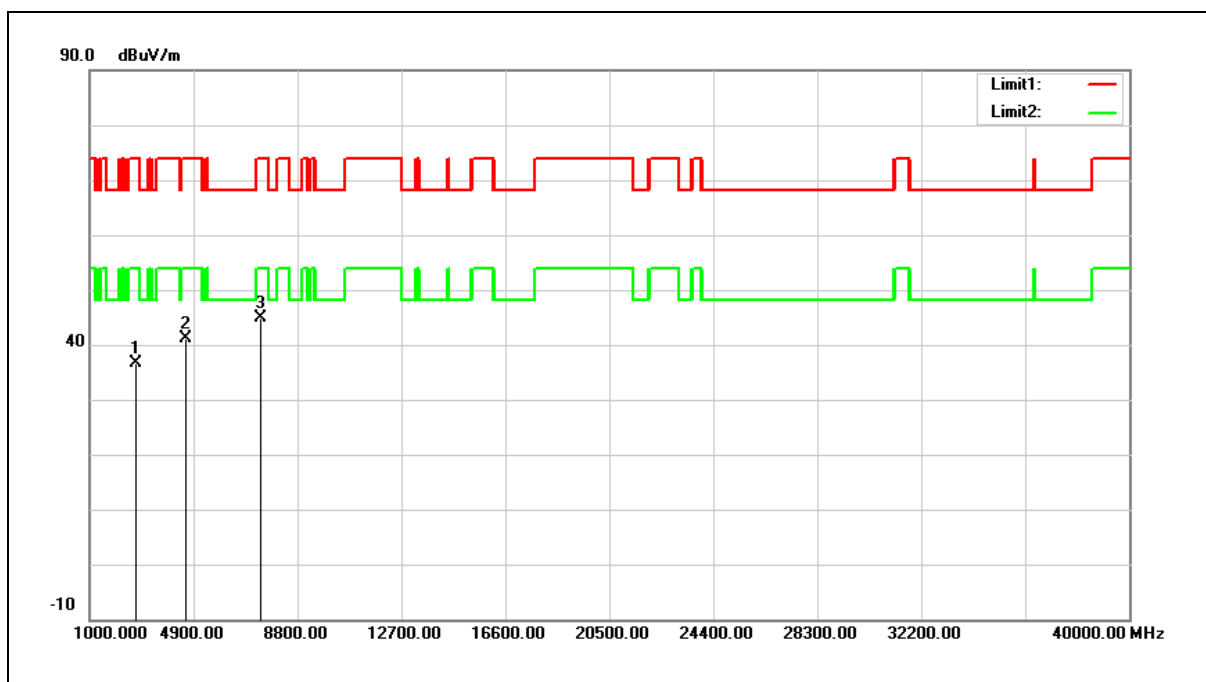


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2751.000	38.49	-1.96	36.53	74.00	-37.47	peak
2	4587.000	38.90	2.26	41.16	74.00	-32.84	peak
3	7426.000	35.41	9.51	44.92	74.00	-29.08	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Harmonic		
Mode:	Mode 12		
Ant.Polar.:	Vertical		
Description:			

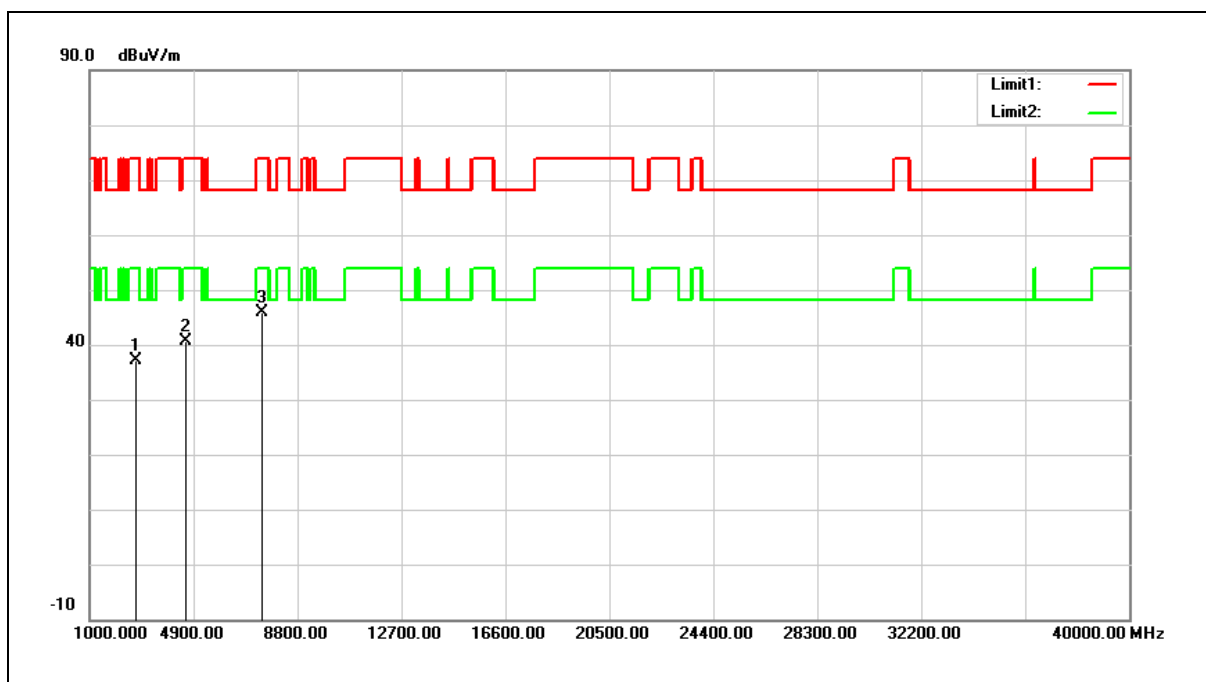

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2717.000	39.30	-2.08	37.22	74.00	-36.78	peak
2	4621.000	38.31	2.35	40.66	74.00	-33.34	peak
3	7443.000	36.24	9.56	45.80	74.00	-28.20	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).


2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

頻帶邊緣

附註：其上下邊緣落於低功率射頻電機第 2.7 節所列頻帶內之混附發射，其電場強度必須符合第 2.8 節的限制規定。

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

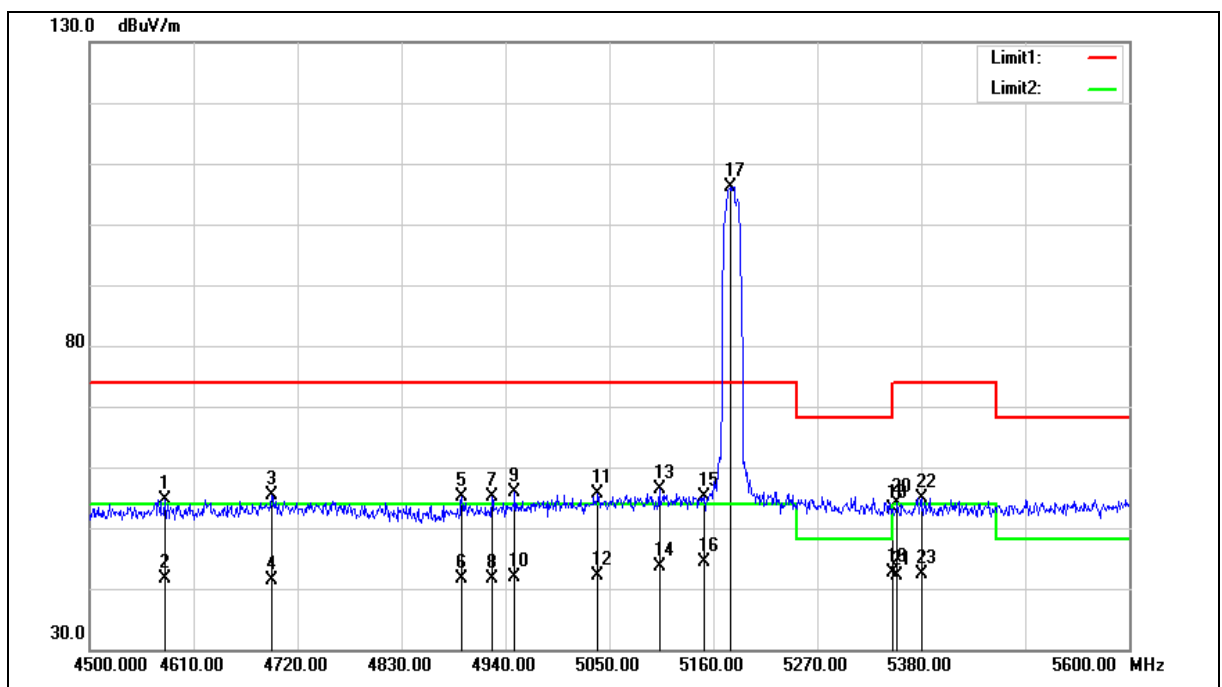

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4579.200	52.46	2.24	54.70	74.00	-19.30	peak
2	4579.200	39.29	2.24	41.53	54.00	-12.47	AVG
3	4692.500	52.94	2.52	55.46	74.00	-18.54	peak
4	4692.500	38.97	2.52	41.49	54.00	-12.51	AVG
5	4893.800	52.14	3.01	55.15	74.00	-18.85	peak
6	4893.800	38.53	3.01	41.54	54.00	-12.46	AVG
7	4925.700	51.96	3.09	55.05	74.00	-18.95	peak
8	4925.700	38.66	3.09	41.75	54.00	-12.25	AVG
9	4949.900	52.80	3.15	55.95	74.00	-18.05	peak
10	4949.900	38.81	3.15	41.96	54.00	-12.04	AVG
11	5037.900	52.20	3.32	55.52	74.00	-18.48	peak
12	5037.900	38.78	3.32	42.10	54.00	-11.90	AVG
13	5102.800	53.04	3.40	56.44	74.00	-17.56	peak
14	5102.800	40.11	3.40	43.51	54.00	-10.49	AVG
15	5150.000	51.76	3.47	55.23	74.00	-18.77	peak
16	5150.000	40.98	3.47	44.45	54.00	-9.55	AVG
17	5178.700	102.73	3.51	106.24	--	--	peak
18	5350.000	49.37	3.73	53.10	74.00	-20.90	peak
19	5350.000	38.90	3.73	42.63	54.00	-11.37	AVG
20	5354.700	50.28	3.73	54.01	74.00	-19.99	peak
21	5354.700	38.48	3.73	42.21	54.00	-11.79	AVG
22	5380.000	51.11	3.77	54.88	74.00	-19.12	peak
23	5380.000	38.53	3.77	42.30	54.00	-11.70	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

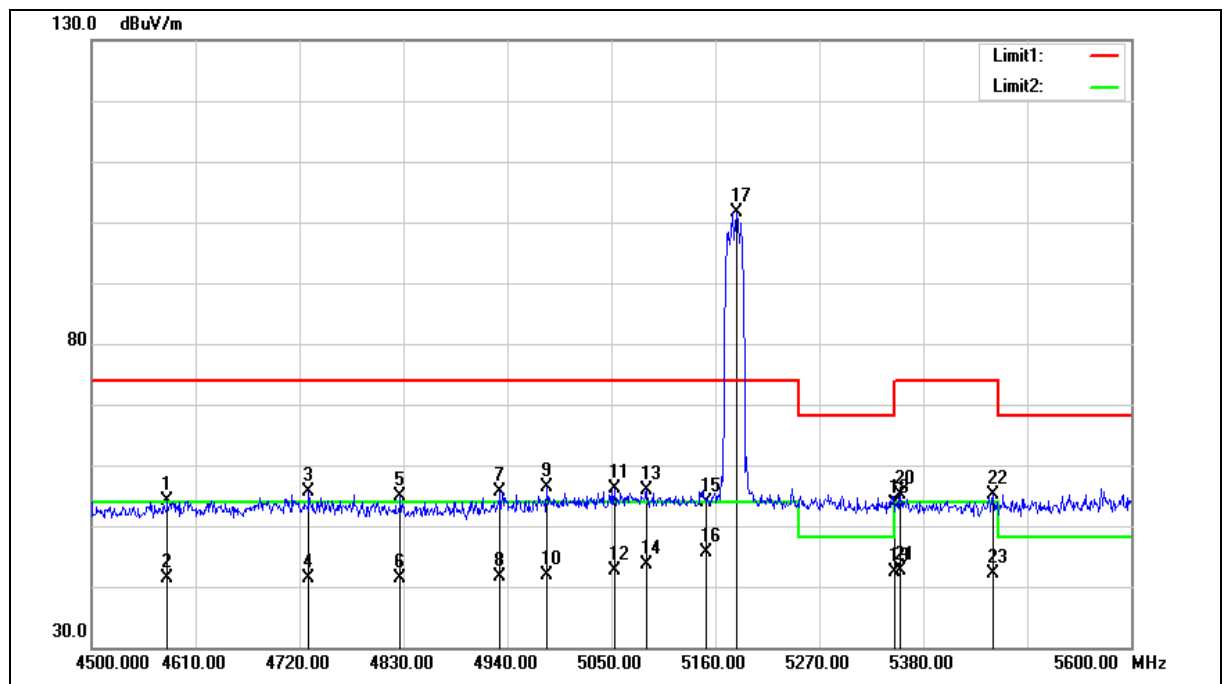

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4580.300	51.92	2.24	54.16	74.00	-19.84	peak
2	4580.300	39.05	2.24	41.29	54.00	-12.71	AVG
3	4729.900	53.12	2.61	55.73	74.00	-18.27	peak
4	4729.900	38.70	2.61	41.31	54.00	-12.69	AVG
5	4826.700	52.12	2.85	54.97	74.00	-19.03	peak
6	4826.700	38.53	2.85	41.38	54.00	-12.62	AVG
7	4932.300	52.63	3.11	55.74	74.00	-18.26	peak
8	4932.300	38.54	3.11	41.65	54.00	-12.35	AVG
9	4981.800	53.12	3.23	56.35	74.00	-17.65	peak
10	4981.800	38.59	3.23	41.82	54.00	-12.18	AVG
11	5053.300	52.77	3.34	56.11	74.00	-17.89	peak
12	5053.300	39.34	3.34	42.68	54.00	-11.32	AVG
13	5087.400	52.52	3.38	55.90	74.00	-18.10	peak
14	5087.400	40.33	3.38	43.71	54.00	-10.29	AVG
15	5150.000	50.37	3.47	53.84	74.00	-20.16	peak
16	5150.000	42.06	3.47	45.53	54.00	-8.47	AVG
17	5183.100	98.17	3.52	101.69	--	--	peak
18	5350.000	49.85	3.73	53.58	74.00	-20.42	peak
19	5350.000	38.68	3.73	42.41	54.00	-11.59	AVG
20	5355.800	51.36	3.73	55.09	74.00	-18.91	peak
21	5355.800	38.80	3.73	42.53	54.00	-11.47	AVG
22	5453.700	51.19	3.87	55.06	74.00	-18.94	peak
23	5453.700	38.16	3.87	42.03	54.00	-11.97	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

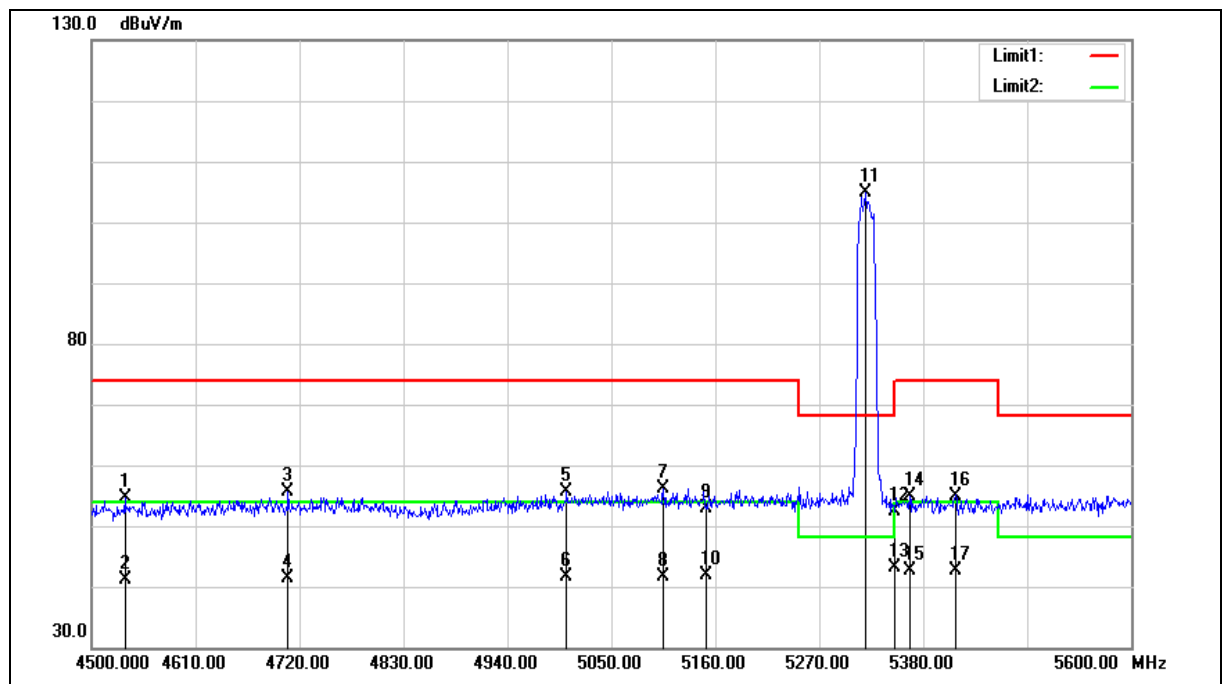

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4535.200	52.47	2.14	54.61	74.00	-19.39	peak
2	4535.200	38.91	2.14	41.05	54.00	-12.95	AVG
3	4707.900	53.07	2.55	55.62	74.00	-18.38	peak
4	4707.900	38.84	2.55	41.39	54.00	-12.61	AVG
5	5002.700	52.31	3.27	55.58	74.00	-18.42	peak
6	5002.700	38.27	3.27	41.54	54.00	-12.46	AVG
7	5105.000	52.67	3.40	56.07	74.00	-17.93	peak
8	5105.000	38.35	3.40	41.75	54.00	-12.25	AVG
9	5150.000	49.42	3.47	52.89	74.00	-21.11	peak
10	5150.000	38.47	3.47	41.94	54.00	-12.06	AVG
11	5319.500	101.25	3.69	104.94	--	--	peak
12	5350.000	48.65	3.73	52.38	74.00	-21.62	peak
13	5350.000	39.41	3.73	43.14	54.00	-10.86	AVG
14	5365.700	51.06	3.75	54.81	74.00	-19.19	peak
15	5365.700	38.98	3.75	42.73	54.00	-11.27	AVG
16	5414.100	51.18	3.82	55.00	74.00	-19.00	peak
17	5414.100	38.79	3.82	42.61	54.00	-11.39	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

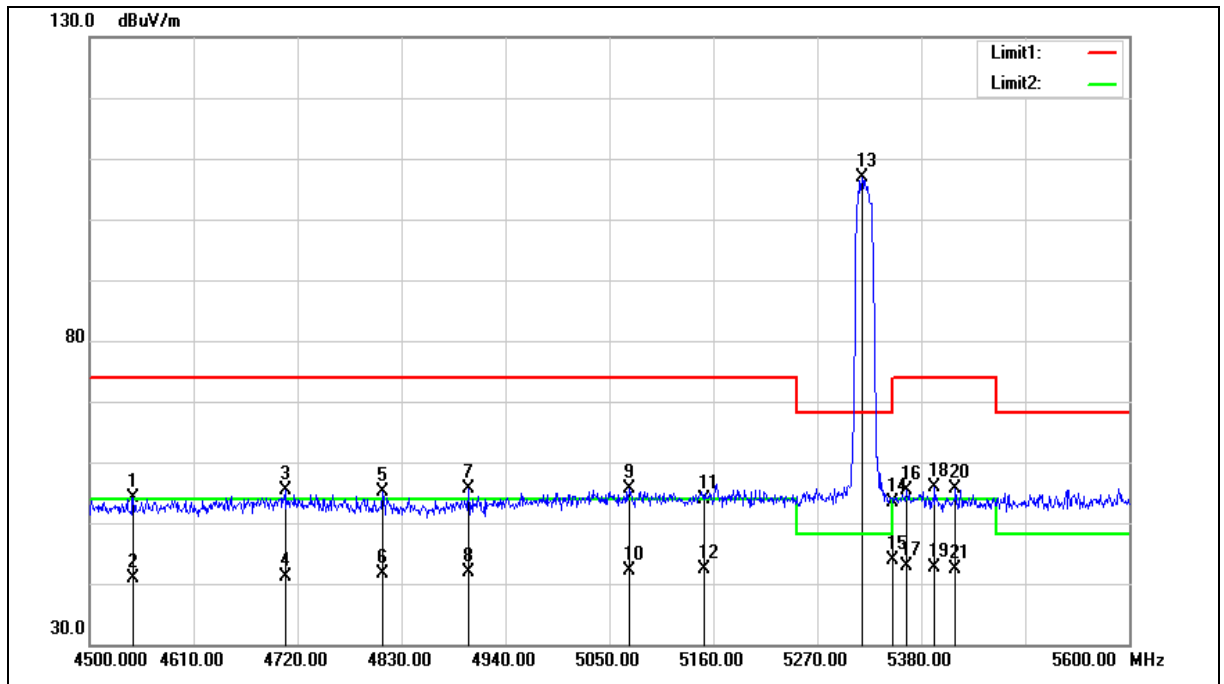

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4546.200	52.00	2.16	54.16	74.00	-19.84	peak
2	4546.200	38.62	2.16	40.78	54.00	-13.22	AVG
3	4706.800	52.75	2.55	55.30	74.00	-18.70	peak
4	4706.800	38.65	2.55	41.20	54.00	-12.80	AVG
5	4810.200	52.34	2.81	55.15	74.00	-18.85	peak
6	4810.200	38.87	2.81	41.68	54.00	-12.32	AVG
7	4901.500	52.52	3.02	55.54	74.00	-18.46	peak
8	4901.500	38.93	3.02	41.95	54.00	-12.05	AVG
9	5070.900	52.29	3.36	55.65	74.00	-18.35	peak
10	5070.900	38.74	3.36	42.10	54.00	-11.90	AVG
11	5150.000	50.37	3.47	53.84	74.00	-20.16	peak
12	5150.000	38.80	3.47	42.27	54.00	-11.73	AVG
13	5317.300	103.15	3.68	106.83	--	--	peak
14	5350.000	49.61	3.73	53.34	74.00	-20.66	peak
15	5350.000	40.19	3.73	43.92	54.00	-10.08	AVG
16	5364.600	51.62	3.75	55.37	74.00	-18.63	peak
17	5364.600	39.06	3.75	42.81	54.00	-11.19	AVG
18	5394.300	52.06	3.80	55.86	74.00	-18.14	peak
19	5394.300	38.92	3.80	42.72	54.00	-11.28	AVG
20	5416.300	51.79	3.82	55.61	74.00	-18.39	peak
21	5416.300	38.67	3.82	42.49	54.00	-11.51	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

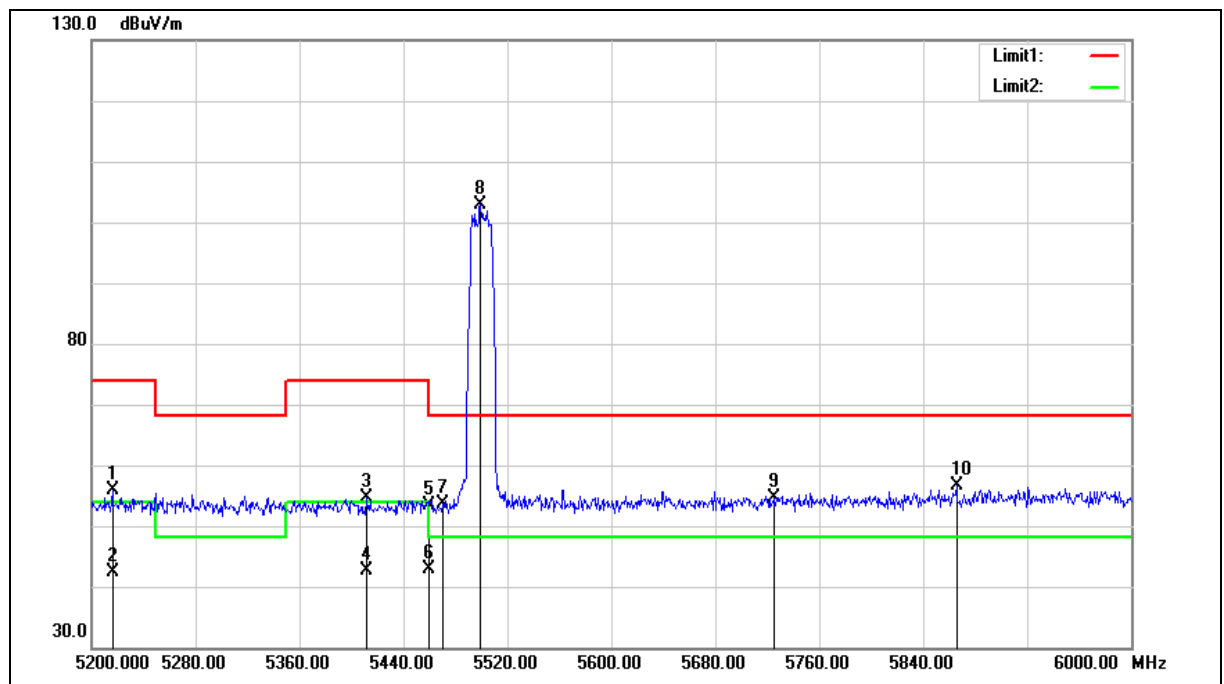

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5216.000	52.43	3.55	55.98	74.00	-18.02	peak
2	5216.000	38.71	3.55	42.26	54.00	-11.74	AVG
3	5411.200	50.81	3.82	54.63	74.00	-19.37	peak
4	5411.200	38.69	3.82	42.51	54.00	-11.49	AVG
5	5460.000	49.44	3.88	53.32	74.00	-20.68	peak
6	5460.000	38.89	3.88	42.77	54.00	-11.23	AVG
7	5470.000	49.75	3.90	53.65	68.20	-14.55	peak
8	5499.200	99.01	3.93	102.94	--	--	peak
9	5725.000	50.24	4.39	54.63	68.20	-13.57	peak
10	5865.600	52.03	4.67	56.70	68.20	-11.50	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

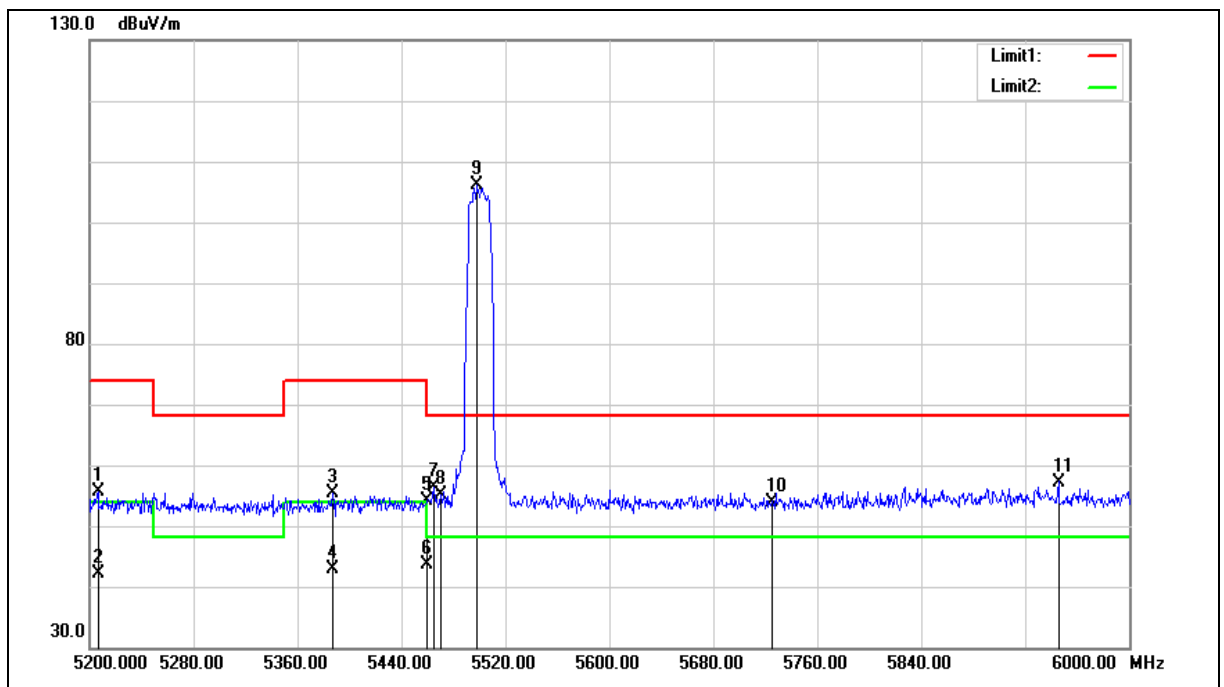

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5206.400	52.03	3.55	55.58	74.00	-18.42	peak
2	5206.400	38.48	3.55	42.03	54.00	-11.97	AVG
3	5387.200	51.49	3.79	55.28	74.00	-18.72	peak
4	5387.200	39.20	3.79	42.99	54.00	-11.01	AVG
5	5460.000	50.31	3.88	54.19	74.00	-19.81	peak
6	5460.000	39.85	3.88	43.73	54.00	-10.27	AVG
7	5464.800	52.41	3.88	56.29	68.20	-11.91	peak
8	5470.000	51.13	3.90	55.03	68.20	-13.17	peak
9	5497.600	102.13	3.93	106.06	--	--	peak
10	5725.000	49.44	4.39	53.83	68.20	-14.37	peak
11	5945.600	52.40	4.85	57.25	68.20	-10.95	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

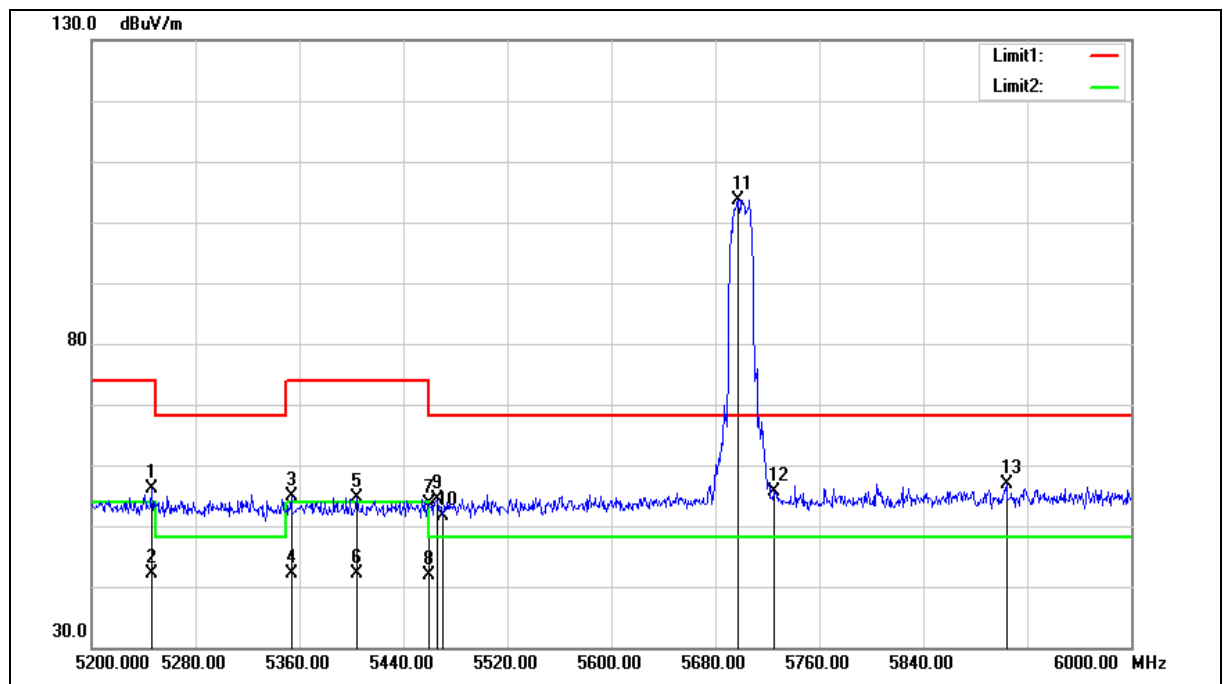

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5246.400	52.52	3.60	56.12	74.00	-17.88	peak
2	5246.400	38.46	3.60	42.06	54.00	-11.94	AVG
3	5353.600	51.03	3.73	54.76	74.00	-19.24	peak
4	5353.600	38.37	3.73	42.10	54.00	-11.90	AVG
5	5404.000	50.77	3.80	54.57	74.00	-19.43	peak
6	5404.000	38.38	3.80	42.18	54.00	-11.82	AVG
7	5460.000	49.83	3.88	53.71	74.00	-20.29	peak
8	5460.000	38.01	3.88	41.89	54.00	-12.11	AVG
9	5466.400	50.48	3.88	54.36	68.20	-13.84	peak
10	5470.000	47.80	3.90	51.70	68.20	-16.50	peak
11	5697.600	99.33	4.34	103.67	--	--	peak
12	5725.000	51.28	4.39	55.67	68.20	-12.53	peak
13	5904.000	52.08	4.77	56.85	68.20	-11.35	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

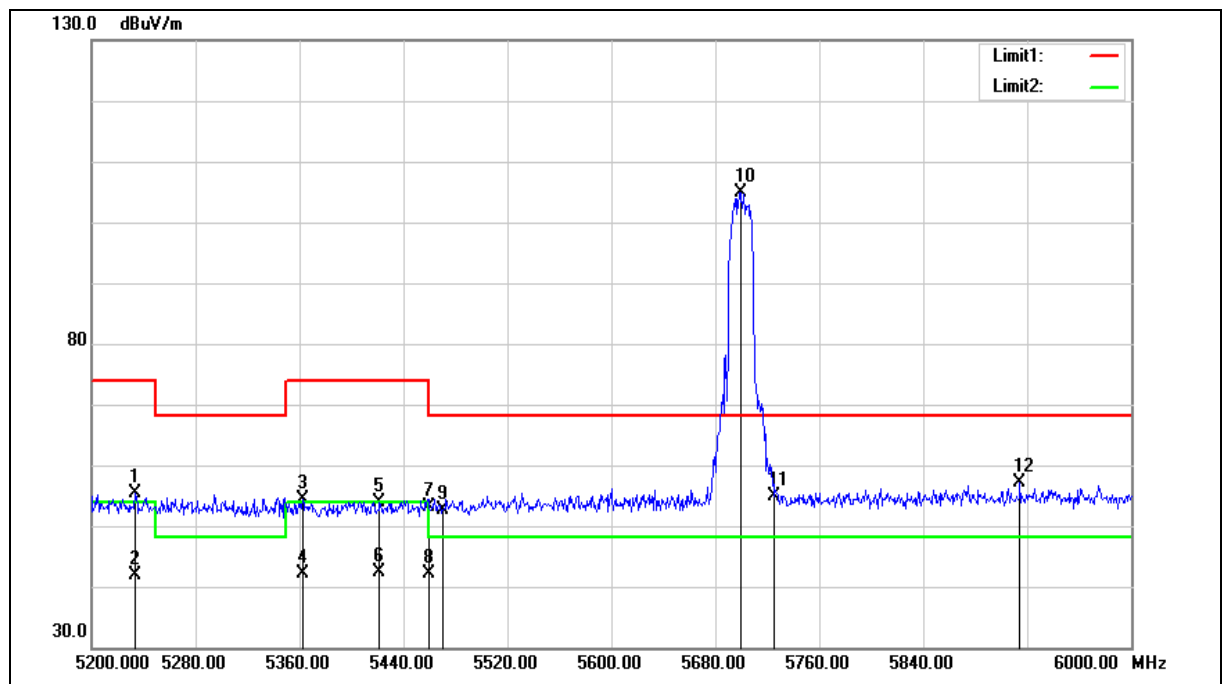

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5233.600	51.86	3.58	55.44	74.00	-18.56	peak
2	5233.600	38.39	3.58	41.97	54.00	-12.03	AVG
3	5362.400	50.60	3.74	54.34	74.00	-19.66	peak
4	5362.400	38.39	3.74	42.13	54.00	-11.87	AVG
5	5421.600	50.16	3.83	53.99	74.00	-20.01	peak
6	5421.600	38.52	3.83	42.35	54.00	-11.65	AVG
7	5460.000	49.17	3.88	53.05	74.00	-20.95	peak
8	5460.000	38.33	3.88	42.21	54.00	-11.79	AVG
9	5470.000	48.83	3.90	52.73	68.20	-15.47	peak
10	5699.200	100.52	4.34	104.86	--	--	peak
11	5725.000	50.48	4.39	54.87	68.20	-13.33	peak
12	5914.400	52.30	4.78	57.08	68.20	-11.12	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

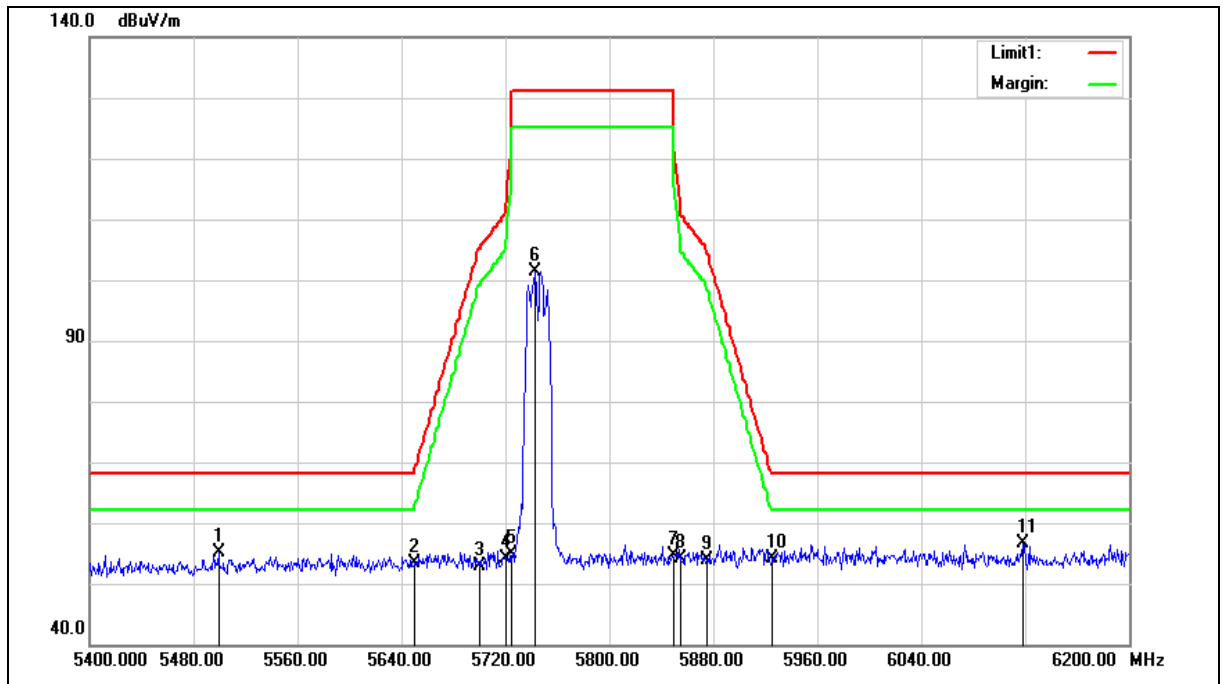

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5499.200	51.17	3.93	55.10	68.20	-13.10	peak
2	5650.000	49.25	4.24	53.49	68.20	-14.71	peak
3	5700.000	48.49	4.34	52.83	105.20	-52.37	peak
4	5720.000	49.76	4.38	54.14	110.80	-56.66	peak
5	5725.000	50.51	4.39	54.90	122.20	-67.30	peak
6	5743.200	96.98	4.43	101.41	--	--	peak
7	5850.000	49.88	4.65	54.53	122.20	-67.67	peak
8	5855.000	49.38	4.66	54.04	110.80	-56.76	peak
9	5875.000	49.28	4.70	53.98	105.20	-51.22	peak
10	5925.000	49.40	4.81	54.21	68.20	-13.99	peak
11	6118.400	51.15	5.36	56.51	68.20	-11.69	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

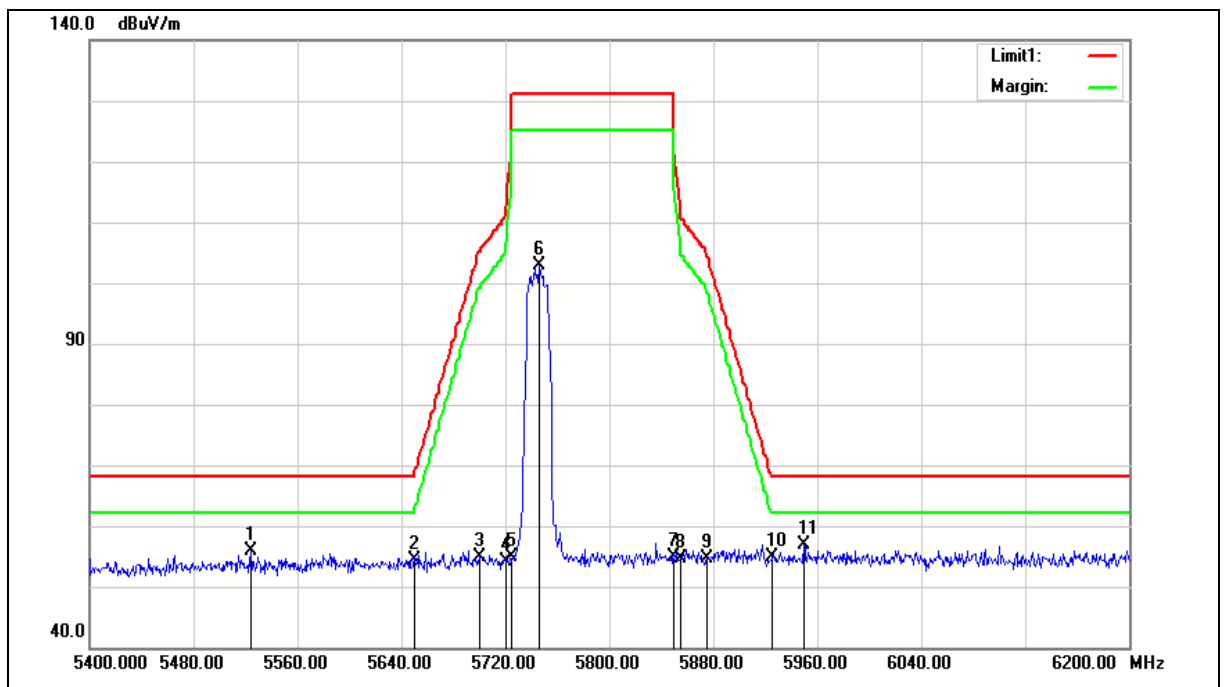

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5524.000	51.82	3.98	55.80	68.20	-12.40	peak
2	5650.000	50.26	4.24	54.50	68.20	-13.70	peak
3	5700.000	50.54	4.34	54.88	105.20	-50.32	peak
4	5720.000	49.84	4.38	54.22	110.80	-56.58	peak
5	5725.000	50.56	4.39	54.95	122.20	-67.25	peak
6	5746.400	98.39	4.43	102.82	--	--	peak
7	5850.000	50.22	4.65	54.87	122.20	-67.33	peak
8	5855.000	50.03	4.66	54.69	110.80	-56.11	peak
9	5875.000	49.87	4.70	54.57	105.20	-50.63	peak
10	5925.000	49.96	4.81	54.77	68.20	-13.43	peak
11	5949.600	51.92	4.86	56.78	68.20	-11.42	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

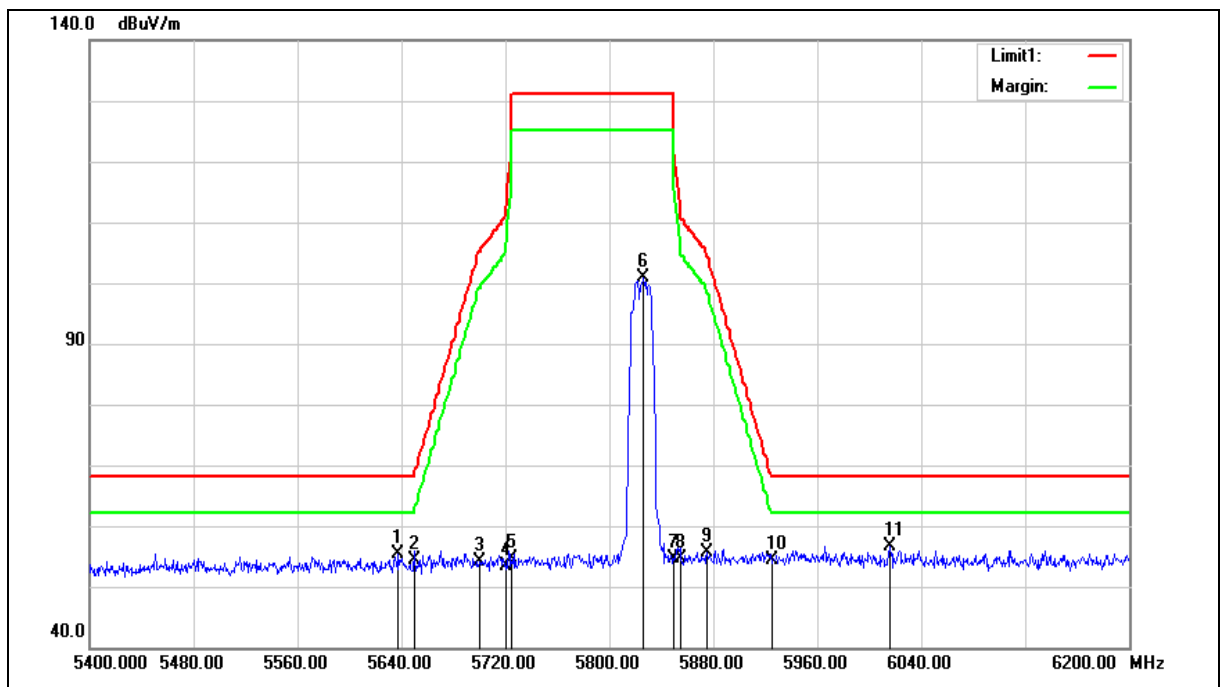

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5637.600	51.10	4.22	55.32	68.20	-12.88	peak
2	5650.000	50.11	4.24	54.35	68.20	-13.85	peak
3	5700.000	49.89	4.34	54.23	105.20	-50.97	peak
4	5720.000	49.00	4.38	53.38	110.80	-57.42	peak
5	5725.000	50.34	4.39	54.73	122.20	-67.47	peak
6	5826.400	96.40	4.60	101.00	--	--	peak
7	5850.000	49.86	4.65	54.51	122.20	-67.69	peak
8	5855.000	49.94	4.66	54.60	110.80	-56.20	peak
9	5875.000	50.82	4.70	55.52	105.20	-49.68	peak
10	5925.000	49.61	4.81	54.42	68.20	-13.78	peak
11	6016.000	51.63	5.02	56.65	68.20	-11.55	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

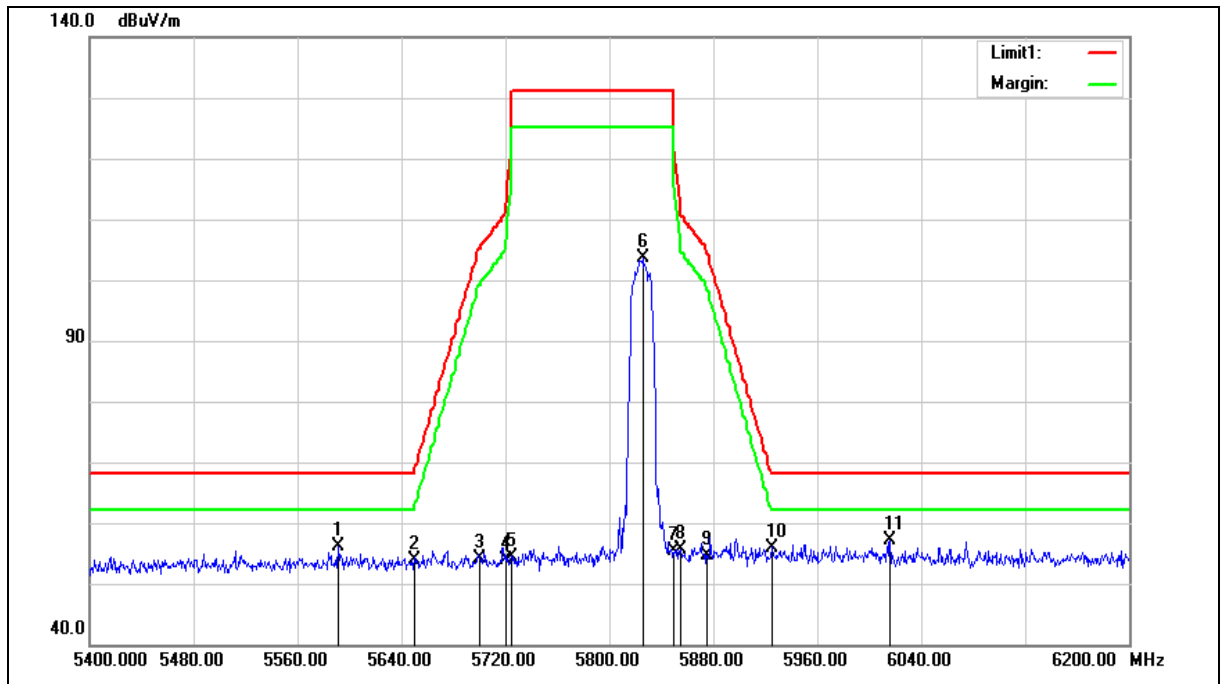

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5591.200	52.00	4.12	56.12	68.20	-12.08	peak
2	5650.000	49.64	4.24	53.88	68.20	-14.32	peak
3	5700.000	49.83	4.34	54.17	105.20	-51.03	peak
4	5720.000	49.50	4.38	53.88	110.80	-56.92	peak
5	5725.000	49.90	4.39	54.29	122.20	-67.91	peak
6	5825.600	98.93	4.60	103.53	--	--	peak
7	5850.000	50.84	4.65	55.49	122.20	-66.71	peak
8	5855.000	51.02	4.66	55.68	110.80	-55.12	peak
9	5875.000	49.85	4.70	54.55	105.20	-50.65	peak
10	5925.000	51.14	4.81	55.95	68.20	-12.25	peak
11	6016.000	52.00	5.02	57.02	68.20	-11.18	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

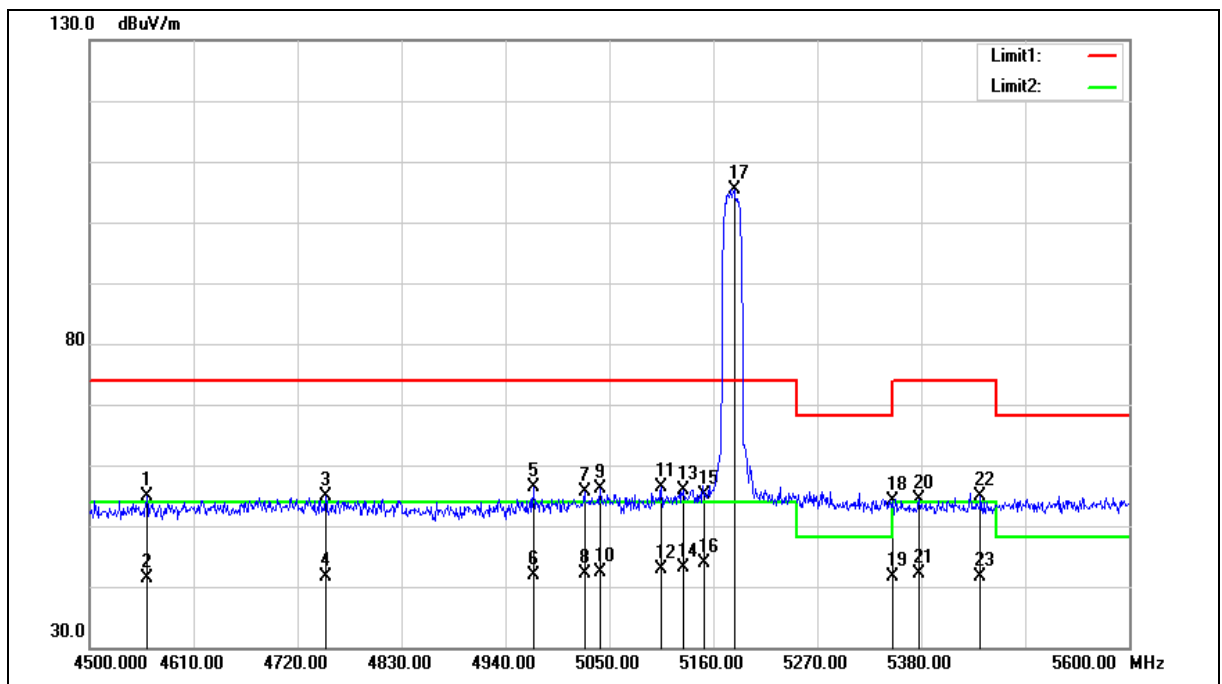

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4560.500	52.70	2.20	54.90	74.00	-19.10	peak
2	4560.500	39.25	2.20	41.45	54.00	-12.55	AVG
3	4749.700	52.16	2.66	54.82	74.00	-19.18	peak
4	4749.700	38.88	2.66	41.54	54.00	-12.46	AVG
5	4969.700	53.06	3.21	56.27	74.00	-17.73	peak
6	4969.700	38.67	3.21	41.88	54.00	-12.12	AVG
7	5023.600	52.23	3.30	55.53	74.00	-18.47	peak
8	5023.600	38.88	3.30	42.18	54.00	-11.82	AVG
9	5040.100	52.84	3.32	56.16	74.00	-17.84	peak
10	5040.100	39.03	3.32	42.35	54.00	-11.65	AVG
11	5105.000	53.06	3.40	56.46	74.00	-17.54	peak
12	5105.000	39.58	3.40	42.98	54.00	-11.02	AVG
13	5128.100	52.54	3.44	55.98	74.00	-18.02	peak
14	5128.100	39.73	3.44	43.17	54.00	-10.83	AVG
15	5150.000	51.59	3.47	55.06	74.00	-18.94	peak
16	5150.000	40.29	3.47	43.76	54.00	-10.24	AVG
17	5182.000	101.79	3.52	105.31	--	--	peak
18	5350.000	50.34	3.73	54.07	74.00	-19.93	peak
19	5350.000	37.89	3.73	41.62	54.00	-12.38	AVG
20	5377.800	50.63	3.77	54.40	74.00	-19.60	peak
21	5377.800	38.34	3.77	42.11	54.00	-11.89	AVG
22	5442.700	51.00	3.85	54.85	74.00	-19.15	peak
23	5442.700	37.90	3.85	41.75	54.00	-12.25	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

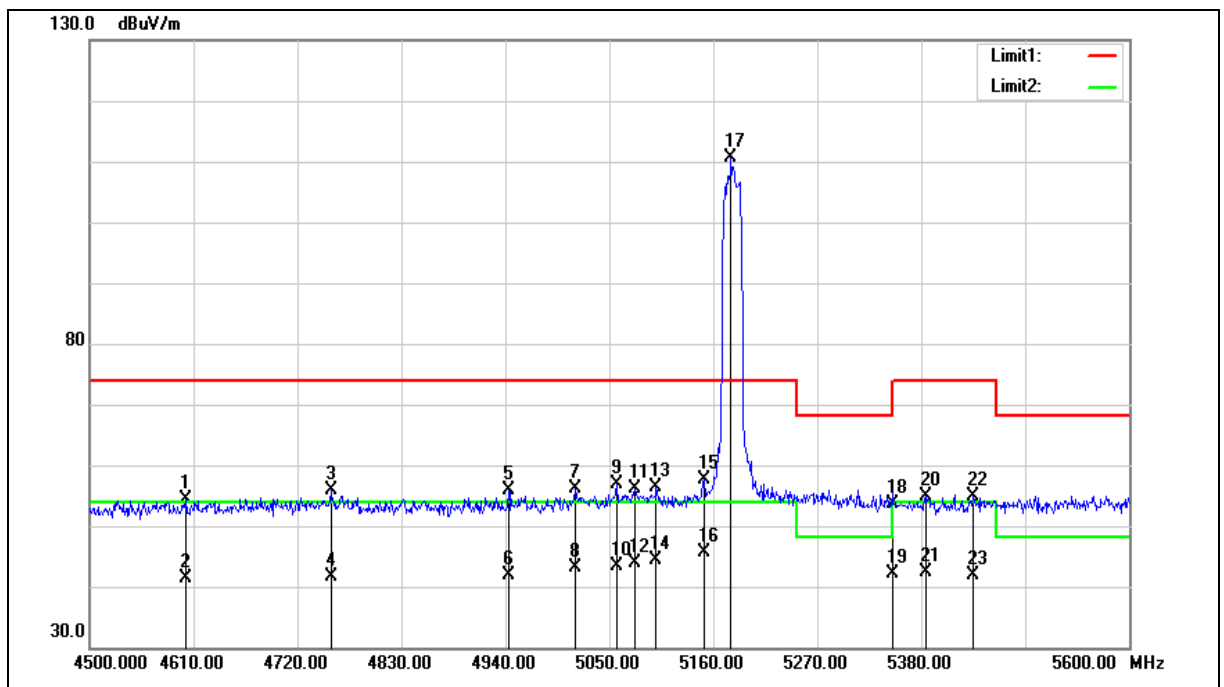

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4602.300	52.08	2.30	54.38	74.00	-19.62	peak
2	4602.300	39.06	2.30	41.36	54.00	-12.64	AVG
3	4755.200	53.31	2.67	55.98	74.00	-18.02	peak
4	4755.200	38.99	2.67	41.66	54.00	-12.34	AVG
5	4943.300	52.77	3.13	55.90	74.00	-18.10	peak
6	4943.300	38.72	3.13	41.85	54.00	-12.15	AVG
7	5013.700	52.72	3.29	56.01	74.00	-17.99	peak
8	5013.700	39.82	3.29	43.11	54.00	-10.89	AVG
9	5057.700	53.45	3.35	56.80	74.00	-17.20	peak
10	5057.700	40.12	3.35	43.47	54.00	-10.53	AVG
11	5076.400	52.82	3.37	56.19	74.00	-17.81	peak
12	5076.400	40.55	3.37	43.92	54.00	-10.08	AVG
13	5099.500	52.91	3.40	56.31	74.00	-17.69	peak
14	5099.500	41.04	3.40	44.44	54.00	-9.56	AVG
15	5150.000	54.16	3.47	57.63	74.00	-16.37	peak
16	5150.000	42.13	3.47	45.60	54.00	-8.40	AVG
17	5178.700	107.08	3.51	110.59	--	--	peak
18	5350.000	49.85	3.73	53.58	74.00	-20.42	peak
19	5350.000	38.44	3.73	42.17	54.00	-11.83	AVG
20	5385.500	51.13	3.79	54.92	74.00	-19.08	peak
21	5385.500	38.50	3.79	42.29	54.00	-11.71	AVG
22	5435.000	51.02	3.85	54.87	74.00	-19.13	peak
23	5435.000	37.95	3.85	41.80	54.00	-12.20	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

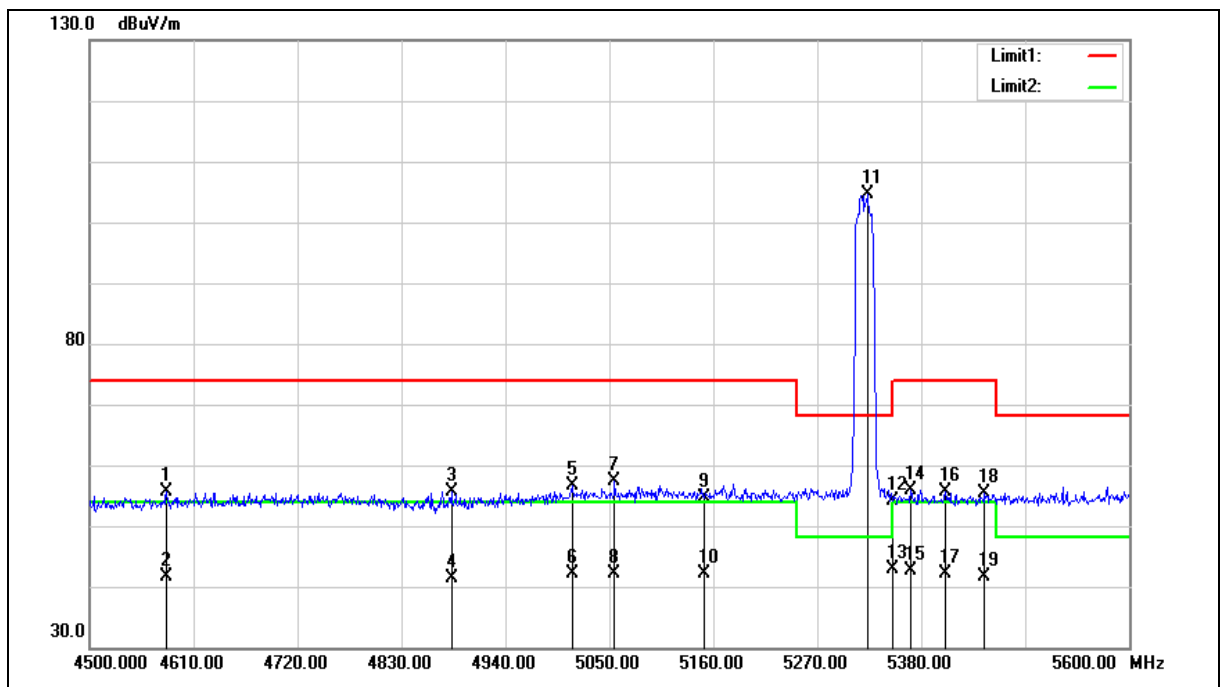

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4581.400	53.44	2.25	55.69	74.00	-18.31	peak
2	4581.400	39.33	2.25	41.58	54.00	-12.42	AVG
3	4882.800	52.60	2.98	55.58	74.00	-18.42	peak
4	4882.800	38.31	2.98	41.29	54.00	-12.71	AVG
5	5010.400	53.25	3.28	56.53	74.00	-17.47	peak
6	5010.400	38.81	3.28	42.09	54.00	-11.91	AVG
7	5055.500	54.10	3.34	57.44	74.00	-16.56	peak
8	5055.500	38.88	3.34	42.22	54.00	-11.78	AVG
9	5150.000	51.11	3.47	54.58	74.00	-19.42	peak
10	5150.000	38.72	3.47	42.19	54.00	-11.81	AVG
11	5322.800	100.83	3.69	104.52	--	--	peak
12	5350.000	50.37	3.73	54.10	74.00	-19.90	peak
13	5350.000	39.13	3.73	42.86	54.00	-11.14	AVG
14	5369.000	52.00	3.76	55.76	74.00	-18.24	peak
15	5369.000	38.76	3.76	42.52	54.00	-11.48	AVG
16	5405.300	51.76	3.80	55.56	74.00	-18.44	peak
17	5405.300	38.34	3.80	42.14	54.00	-11.86	AVG
18	5447.100	51.46	3.86	55.32	74.00	-18.68	peak
19	5447.100	37.86	3.86	41.72	54.00	-12.28	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

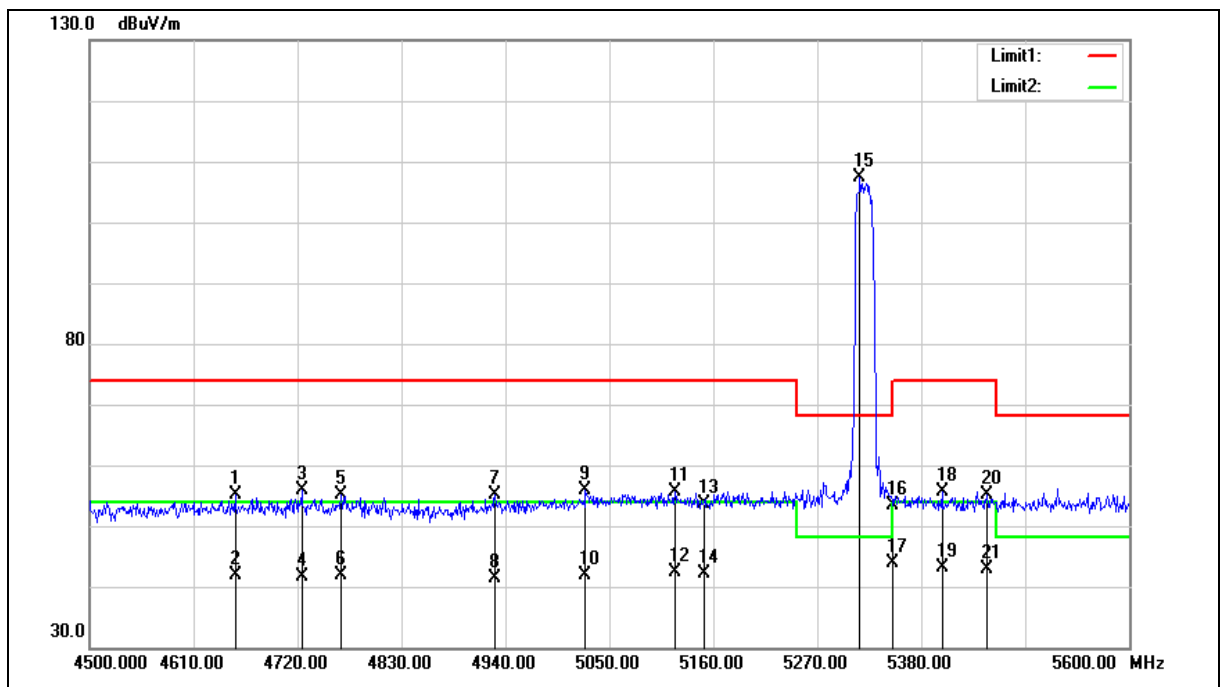

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4654.000	52.66	2.42	55.08	74.00	-18.92	peak
2	4654.000	39.39	2.42	41.81	54.00	-12.19	AVG
3	4724.400	53.23	2.60	55.83	74.00	-18.17	peak
4	4724.400	39.12	2.60	41.72	54.00	-12.28	AVG
5	4766.200	52.39	2.70	55.09	74.00	-18.91	peak
6	4766.200	39.18	2.70	41.88	54.00	-12.12	AVG
7	4929.000	51.99	3.10	55.09	74.00	-18.91	peak
8	4929.000	38.23	3.10	41.33	54.00	-12.67	AVG
9	5024.700	52.58	3.30	55.88	74.00	-18.12	peak
10	5024.700	38.64	3.30	41.94	54.00	-12.06	AVG
11	5119.300	52.23	3.43	55.66	74.00	-18.34	peak
12	5119.300	38.93	3.43	42.36	54.00	-11.64	AVG
13	5150.000	50.28	3.47	53.75	74.00	-20.25	peak
14	5150.000	38.70	3.47	42.17	54.00	-11.83	AVG
15	5315.100	103.63	3.68	107.31	--	--	peak
16	5350.000	49.74	3.73	53.47	74.00	-20.53	peak
17	5350.000	40.25	3.73	43.98	54.00	-10.02	AVG
18	5402.000	51.77	3.80	55.57	74.00	-18.43	peak
19	5402.000	39.43	3.80	43.23	54.00	-10.77	AVG
20	5449.300	51.20	3.87	55.07	74.00	-18.93	peak
21	5449.300	38.95	3.87	42.82	54.00	-11.18	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

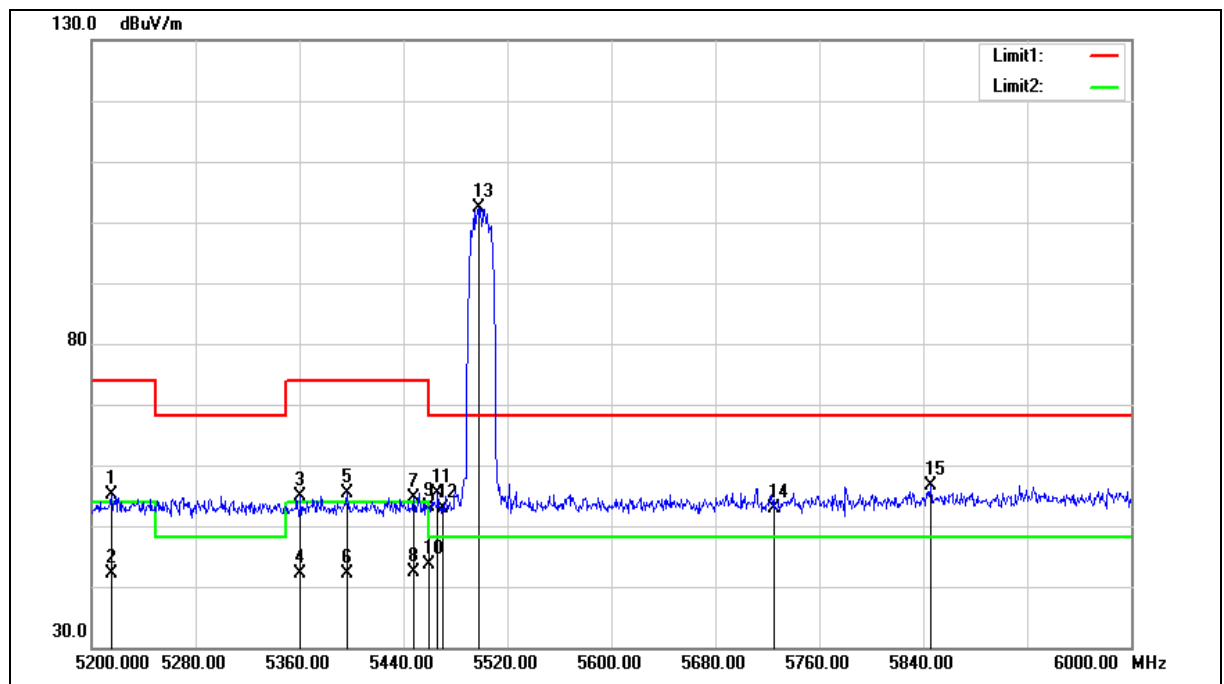

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5215.200	51.55	3.55	55.10	74.00	-18.90	peak
2	5215.200	38.46	3.55	42.01	54.00	-11.99	AVG
3	5360.800	51.07	3.74	54.81	74.00	-19.19	peak
4	5360.800	38.46	3.74	42.20	54.00	-11.80	AVG
5	5396.800	51.57	3.80	55.37	74.00	-18.63	peak
6	5396.800	38.32	3.80	42.12	54.00	-11.88	AVG
7	5448.000	50.78	3.87	54.65	74.00	-19.35	peak
8	5448.000	38.62	3.87	42.49	54.00	-11.51	AVG
9	5460.000	49.32	3.88	53.20	74.00	-20.80	peak
10	5460.000	39.67	3.88	43.55	54.00	-10.45	AVG
11	5466.400	51.46	3.88	55.34	68.20	-12.86	peak
12	5470.000	48.92	3.90	52.82	68.20	-15.38	peak
13	5498.400	98.46	3.93	102.39	--	--	peak
14	5725.000	48.58	4.39	52.97	68.20	-15.23	peak
15	5845.600	52.07	4.64	56.71	68.20	-11.49	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

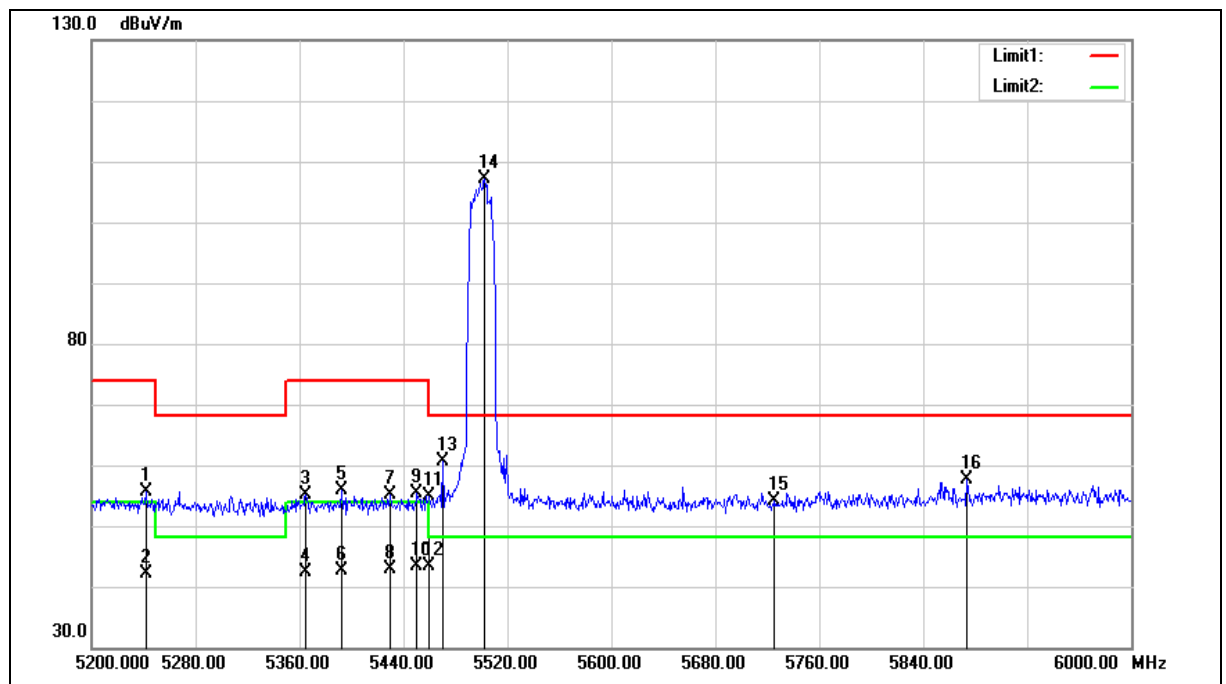

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5241.600	52.05	3.59	55.64	74.00	-18.36	peak
2	5241.600	38.42	3.59	42.01	54.00	-11.99	AVG
3	5364.800	51.37	3.75	55.12	74.00	-18.88	peak
4	5364.800	38.64	3.75	42.39	54.00	-11.61	AVG
5	5392.000	52.10	3.79	55.89	74.00	-18.11	peak
6	5392.000	38.72	3.79	42.51	54.00	-11.49	AVG
7	5429.600	51.19	3.84	55.03	74.00	-18.97	peak
8	5429.600	39.09	3.84	42.93	54.00	-11.07	AVG
9	5450.400	51.51	3.87	55.38	74.00	-18.62	peak
10	5450.400	39.61	3.87	43.48	54.00	-10.52	AVG
11	5460.000	50.89	3.88	54.77	74.00	-19.23	peak
12	5460.000	39.46	3.88	43.34	54.00	-10.66	AVG
13	5470.000	56.79	3.90	60.69	68.20	-7.51	peak
14	5502.400	103.24	3.93	107.17	--	--	peak
15	5725.000	49.67	4.39	54.06	68.20	-14.14	peak
16	5873.600	52.87	4.70	57.57	68.20	-10.63	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

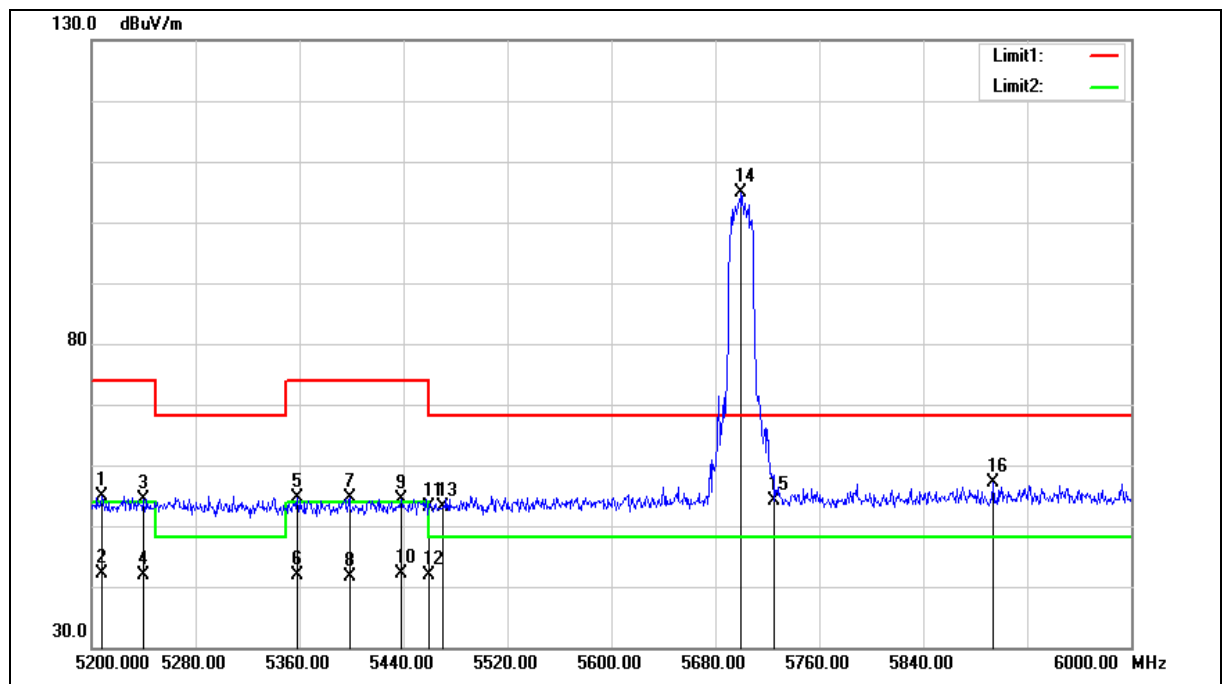

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5208.000	51.42	3.55	54.97	74.00	-19.03	peak
2	5208.000	38.56	3.55	42.11	54.00	-11.89	AVG
3	5240.000	50.73	3.59	54.32	74.00	-19.68	peak
4	5240.000	38.22	3.59	41.81	54.00	-12.19	AVG
5	5358.400	50.97	3.74	54.71	74.00	-19.29	peak
6	5358.400	38.24	3.74	41.98	54.00	-12.02	AVG
7	5398.400	50.90	3.80	54.70	74.00	-19.30	peak
8	5398.400	37.86	3.80	41.66	54.00	-12.34	AVG
9	5438.400	50.51	3.85	54.36	74.00	-19.64	peak
10	5438.400	38.18	3.85	42.03	54.00	-11.97	AVG
11	5460.000	49.13	3.88	53.01	74.00	-20.99	peak
12	5460.000	37.94	3.88	41.82	54.00	-12.18	AVG
13	5470.000	49.33	3.90	53.23	68.20	-14.97	peak
14	5700.000	100.56	4.34	104.90	--	--	peak
15	5725.000	49.64	4.39	54.03	68.20	-14.17	peak
16	5893.600	52.44	4.75	57.19	68.20	-11.01	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

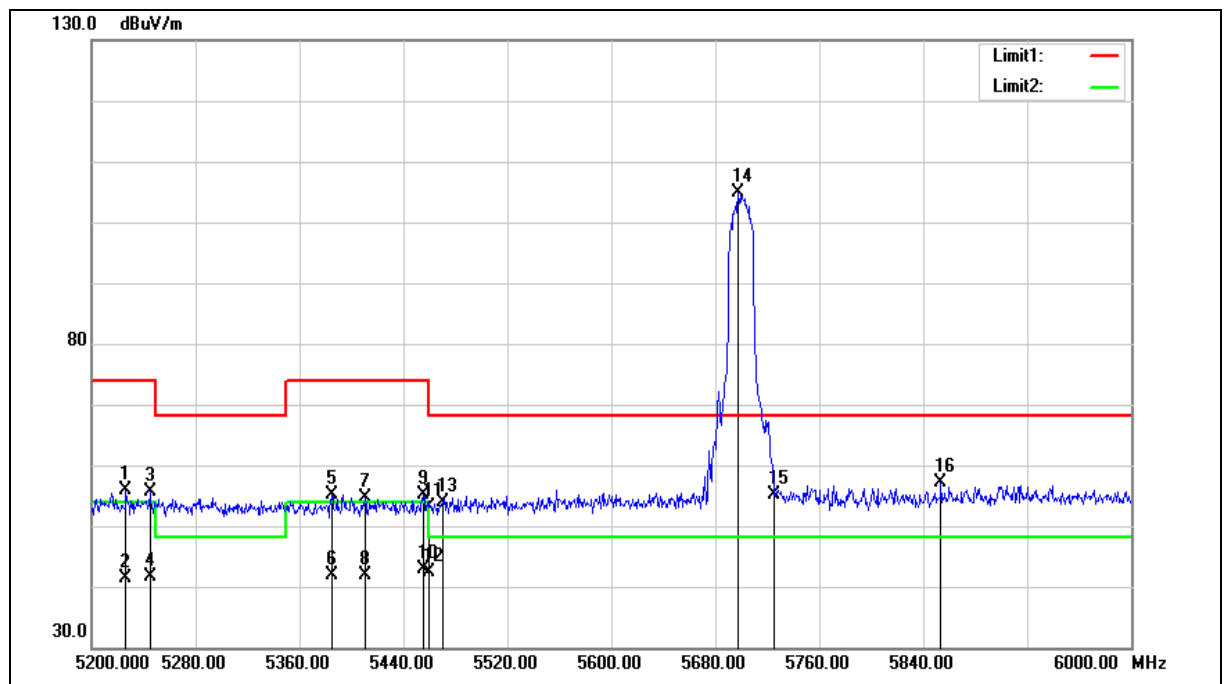

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5226.400	52.36	3.57	55.93	74.00	-18.07	peak
2	5226.400	37.80	3.57	41.37	54.00	-12.63	AVG
3	5244.800	52.11	3.60	55.71	74.00	-18.29	peak
4	5244.800	38.14	3.60	41.74	54.00	-12.26	AVG
5	5384.800	51.30	3.78	55.08	74.00	-18.92	peak
6	5384.800	38.19	3.78	41.97	54.00	-12.03	AVG
7	5410.400	50.79	3.82	54.61	74.00	-19.39	peak
8	5410.400	38.01	3.82	41.83	54.00	-12.17	AVG
9	5455.200	51.17	3.87	55.04	74.00	-18.96	peak
10	5455.200	39.11	3.87	42.98	54.00	-11.02	AVG
11	5460.000	49.15	3.88	53.03	74.00	-20.97	peak
12	5460.000	38.49	3.88	42.37	54.00	-11.63	AVG
13	5470.000	49.86	3.90	53.76	68.20	-14.44	peak
14	5697.600	100.63	4.34	104.97	--	--	peak
15	5725.000	50.69	4.39	55.08	68.20	-13.12	peak
16	5853.600	52.51	4.66	57.17	68.20	-11.03	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

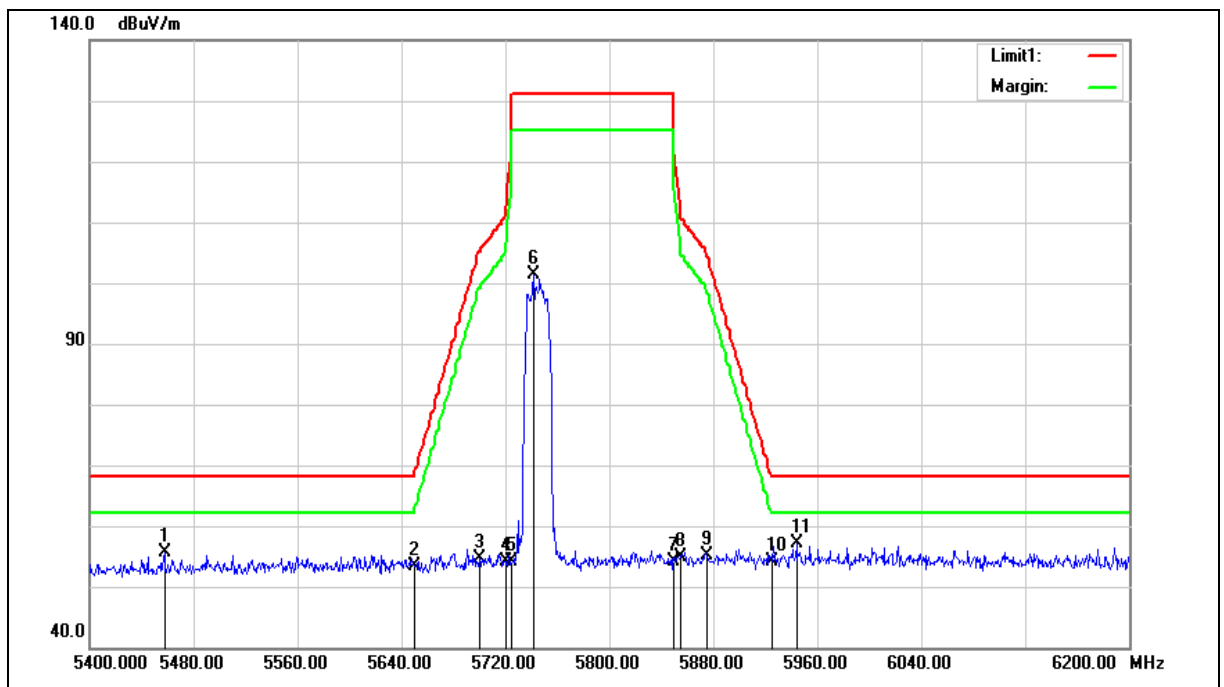

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5457.600	51.79	3.88	55.67	68.20	-12.53	peak
2	5650.000	49.02	4.24	53.26	68.20	-14.94	peak
3	5700.000	50.24	4.34	54.58	105.20	-50.62	peak
4	5720.000	49.76	4.38	54.14	110.80	-56.66	peak
5	5725.000	49.74	4.39	54.13	122.20	-68.07	peak
6	5741.600	97.00	4.43	101.43	--	--	peak
7	5850.000	49.38	4.65	54.03	122.20	-68.17	peak
8	5855.000	50.22	4.66	54.88	110.80	-55.92	peak
9	5875.000	50.48	4.70	55.18	105.20	-50.02	peak
10	5925.000	49.28	4.81	54.09	68.20	-14.11	peak
11	5944.000	52.19	4.85	57.04	68.20	-11.16	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

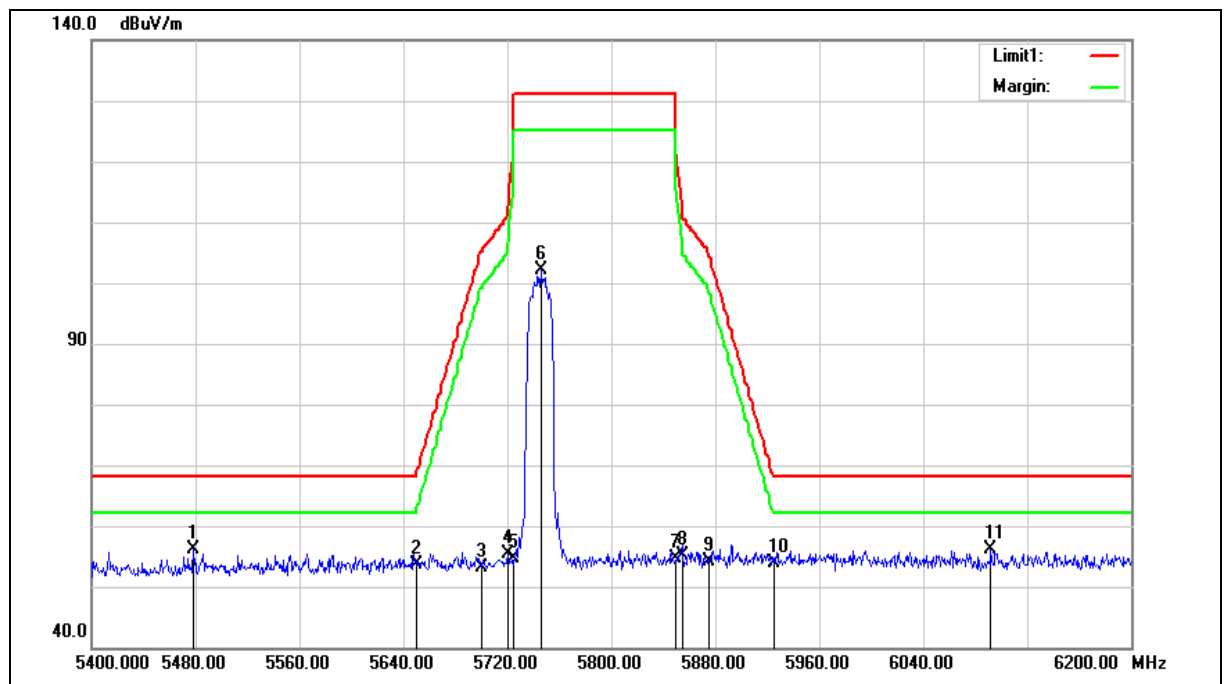

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5478.400	52.15	3.90	56.05	68.20	-12.15	peak
2	5650.000	49.32	4.24	53.56	68.20	-14.64	peak
3	5700.000	48.81	4.34	53.15	105.20	-52.05	peak
4	5720.000	50.99	4.38	55.37	110.80	-55.43	peak
5	5725.000	50.22	4.39	54.61	122.20	-67.59	peak
6	5745.600	97.76	4.43	102.19	--	--	peak
7	5850.000	49.92	4.65	54.57	122.20	-67.63	peak
8	5855.000	50.36	4.66	55.02	110.80	-55.78	peak
9	5875.000	49.53	4.70	54.23	105.20	-50.97	peak
10	5925.000	49.14	4.81	53.95	68.20	-14.25	peak
11	6092.000	50.91	5.26	56.17	68.20	-12.03	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

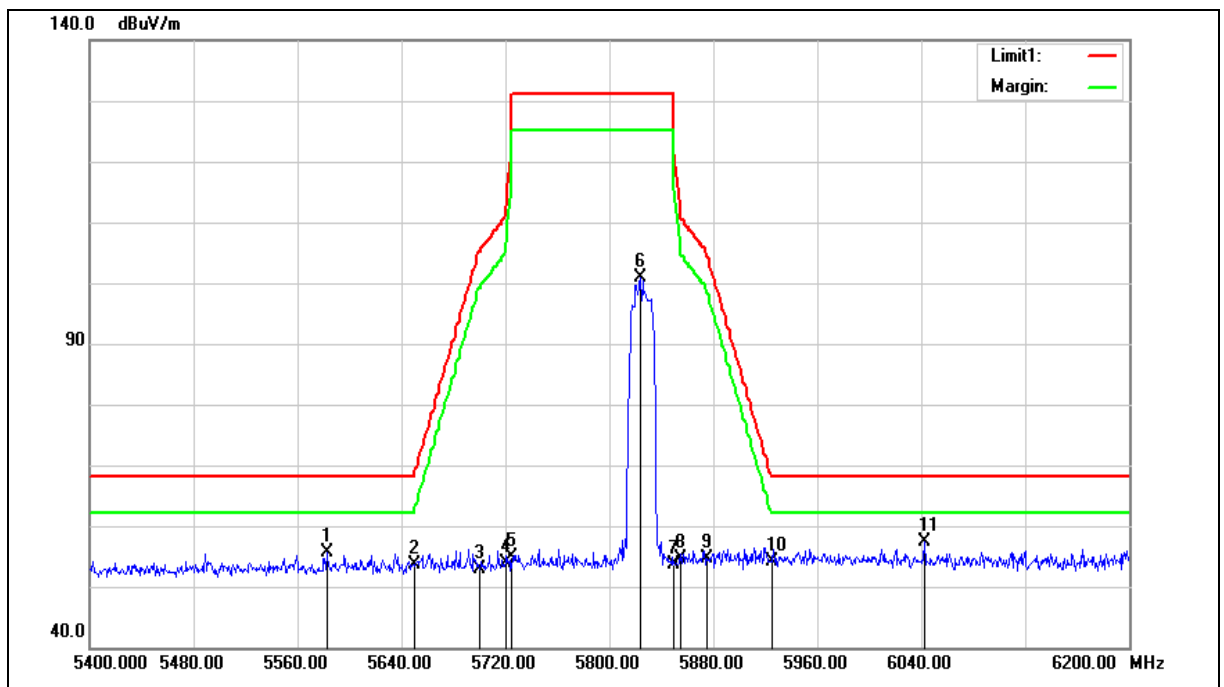

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5582.400	51.56	4.09	55.65	68.20	-12.55	peak
2	5650.000	49.37	4.24	53.61	68.20	-14.59	peak
3	5700.000	48.61	4.34	52.95	105.20	-52.25	peak
4	5720.000	49.42	4.38	53.80	110.80	-57.00	peak
5	5725.000	50.61	4.39	55.00	122.20	-67.20	peak
6	5824.000	96.33	4.60	100.93	--	--	peak
7	5850.000	48.86	4.65	53.51	122.20	-68.69	peak
8	5855.000	50.09	4.66	54.75	110.80	-56.05	peak
9	5875.000	49.94	4.70	54.64	105.20	-50.56	peak
10	5925.000	49.21	4.81	54.02	68.20	-14.18	peak
11	6042.400	52.34	5.10	57.44	68.20	-10.76	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

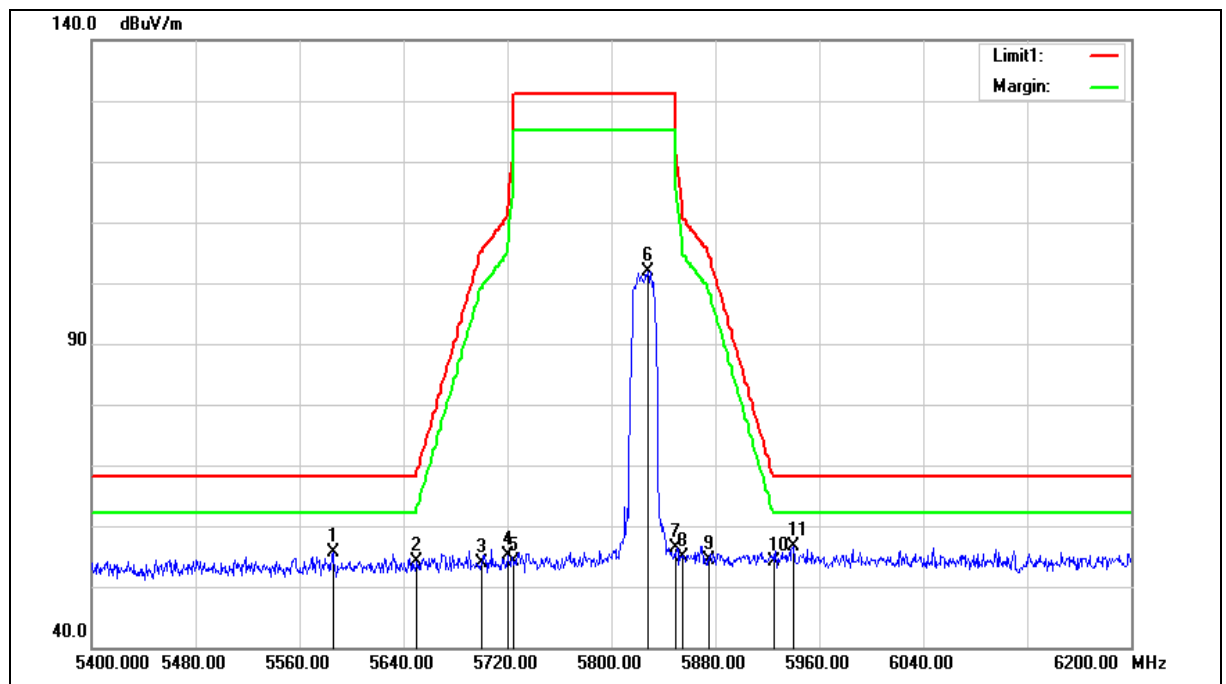

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5585.600	51.41	4.11	55.52	68.20	-12.68	peak
2	5650.000	49.77	4.24	54.01	68.20	-14.19	peak
3	5700.000	49.48	4.34	53.82	105.20	-51.38	peak
4	5720.000	50.68	4.38	55.06	110.80	-55.74	peak
5	5725.000	49.81	4.39	54.20	122.20	-68.00	peak
6	5828.000	97.29	4.60	101.89	--	--	peak
7	5850.000	51.72	4.65	56.37	122.20	-65.83	peak
8	5855.000	50.22	4.66	54.88	110.80	-55.92	peak
9	5875.000	49.63	4.70	54.33	105.20	-50.87	peak
10	5925.000	49.39	4.81	54.20	68.20	-14.00	peak
11	5940.000	51.76	4.83	56.59	68.20	-11.61	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

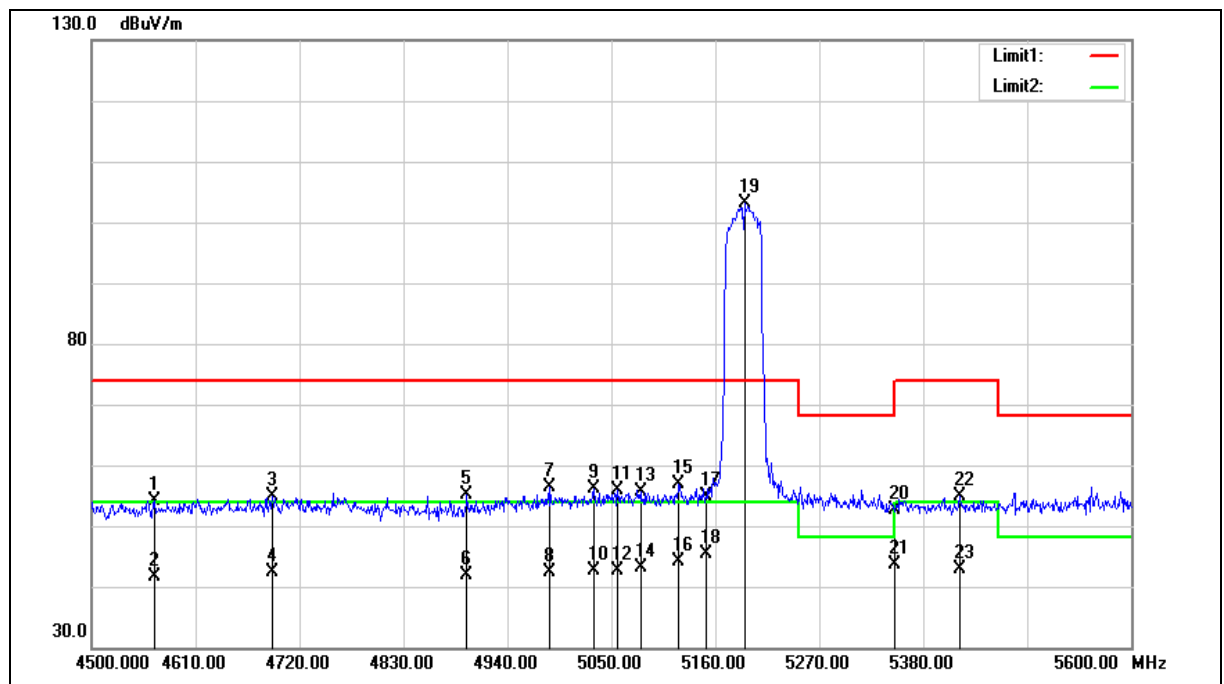

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4566.000	51.82	2.21	54.03	74.00	-19.97	peak
2	4566.000	39.53	2.21	41.74	54.00	-12.26	AVG
3	4691.400	52.26	2.51	54.77	74.00	-19.23	peak
4	4691.400	39.98	2.51	42.49	54.00	-11.51	AVG
5	4897.100	52.03	3.01	55.04	74.00	-18.96	peak
6	4897.100	38.79	3.01	41.80	54.00	-12.20	AVG
7	4985.100	53.14	3.23	56.37	74.00	-17.63	peak
8	4985.100	39.06	3.23	42.29	54.00	-11.71	AVG
9	5031.300	52.73	3.32	56.05	74.00	-17.95	peak
10	5031.300	39.34	3.32	42.66	54.00	-11.34	AVG
11	5056.600	52.50	3.35	55.85	74.00	-18.15	peak
12	5056.600	39.24	3.35	42.59	54.00	-11.41	AVG
13	5080.800	52.21	3.37	55.58	74.00	-18.42	peak
14	5080.800	39.73	3.37	43.10	54.00	-10.90	AVG
15	5121.500	53.47	3.43	56.90	74.00	-17.10	peak
16	5121.500	40.78	3.43	44.21	54.00	-9.79	AVG
17	5150.000	51.31	3.47	54.78	74.00	-19.22	peak
18	5150.000	41.92	3.47	45.39	54.00	-8.61	AVG
19	5190.800	99.65	3.52	103.17	--	--	peak
20	5350.000	48.83	3.73	52.56	74.00	-21.44	peak
21	5350.000	39.79	3.73	43.52	54.00	-10.48	AVG
22	5418.500	50.98	3.82	54.80	74.00	-19.20	peak
23	5418.500	39.13	3.82	42.95	54.00	-11.05	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

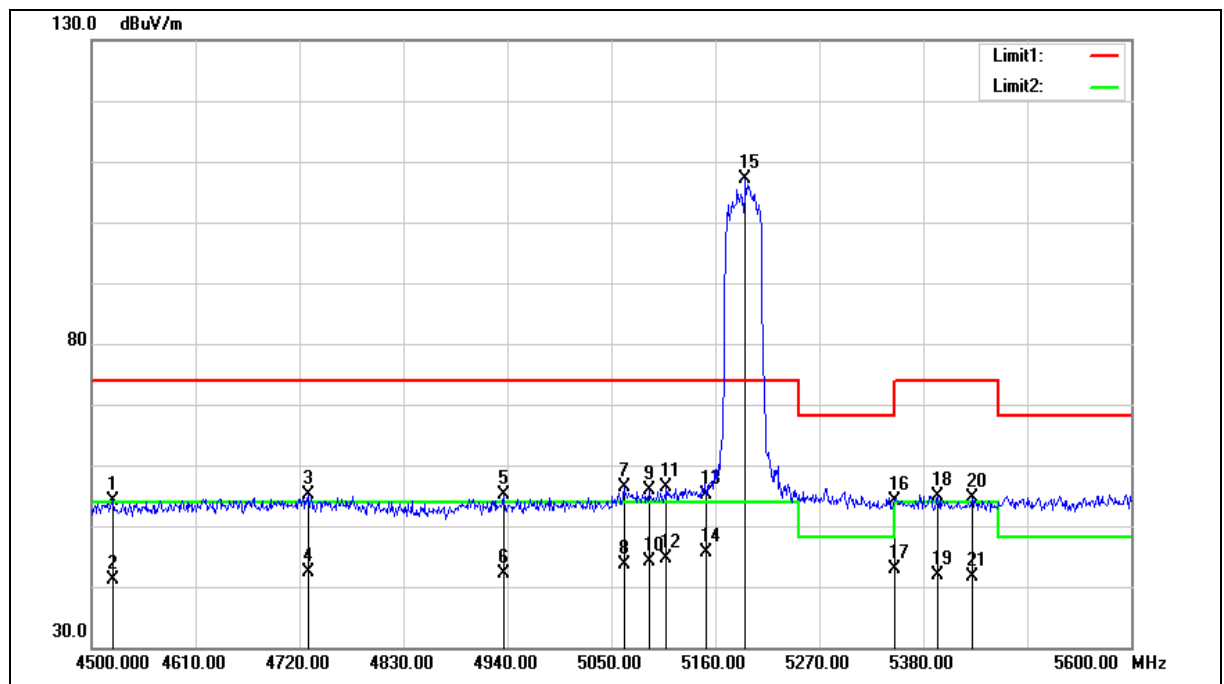

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4523.100	51.91	2.10	54.01	74.00	-19.99	peak
2	4523.100	39.14	2.10	41.24	54.00	-12.76	AVG
3	4728.800	52.57	2.61	55.18	74.00	-18.82	peak
4	4728.800	39.74	2.61	42.35	54.00	-11.65	AVG
5	4935.600	52.09	3.11	55.20	74.00	-18.80	peak
6	4935.600	38.96	3.11	42.07	54.00	-11.93	AVG
7	5063.200	53.13	3.35	56.48	74.00	-17.52	peak
8	5063.200	40.22	3.35	43.57	54.00	-10.43	AVG
9	5089.600	52.40	3.38	55.78	74.00	-18.22	peak
10	5089.600	40.76	3.38	44.14	54.00	-9.86	AVG
11	5108.300	52.92	3.41	56.33	74.00	-17.67	peak
12	5108.300	41.21	3.41	44.62	54.00	-9.38	AVG
13	5150.000	51.63	3.47	55.10	74.00	-18.90	peak
14	5150.000	42.12	3.47	45.59	54.00	-8.41	AVG
15	5191.900	103.59	3.52	107.11	--	--	peak
16	5350.000	50.52	3.73	54.25	74.00	-19.75	peak
17	5350.000	39.04	3.73	42.77	54.00	-11.23	AVG
18	5395.400	51.11	3.80	54.91	74.00	-19.09	peak
19	5395.400	38.01	3.80	41.81	54.00	-12.19	AVG
20	5431.700	50.83	3.85	54.68	74.00	-19.32	peak
21	5431.700	37.68	3.85	41.53	54.00	-12.47	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

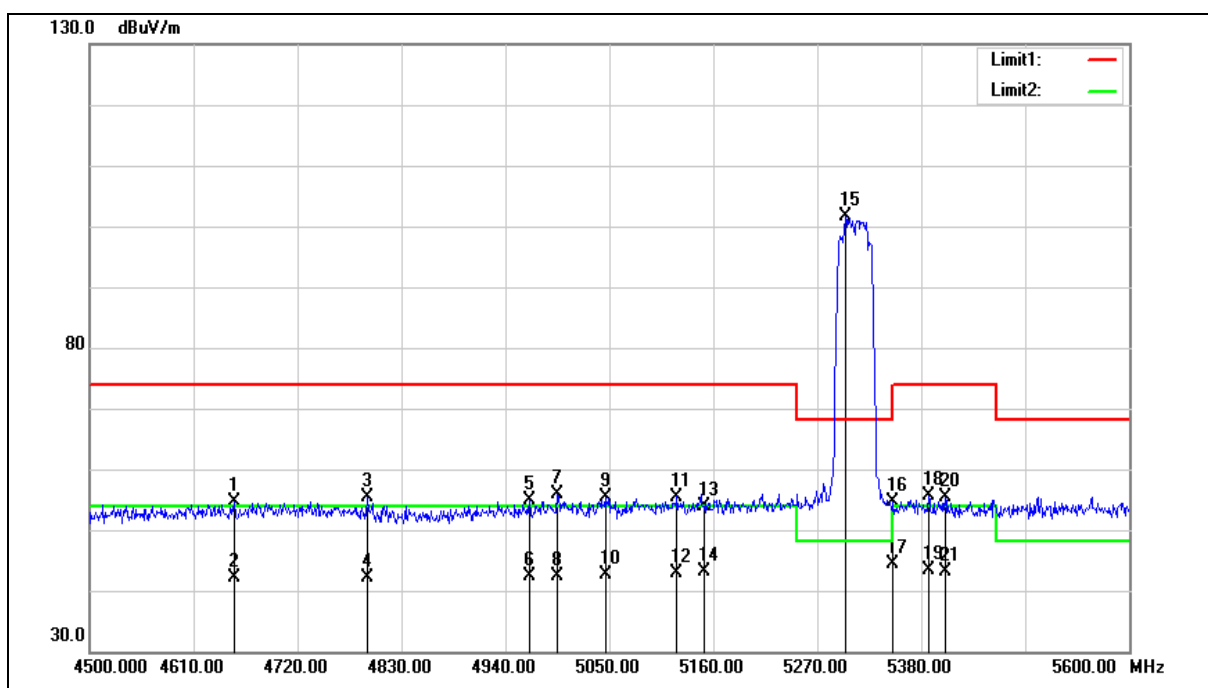

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4652.900	52.23	2.42	54.65	74.00	-19.35	peak
2	4652.900	39.75	2.42	42.17	54.00	-11.83	AVG
3	4793.700	52.61	2.77	55.38	74.00	-18.62	peak
4	4793.700	39.33	2.77	42.10	54.00	-11.90	AVG
5	4965.300	51.69	3.18	54.87	74.00	-19.13	peak
6	4965.300	39.15	3.18	42.33	54.00	-11.67	AVG
7	4995.000	52.62	3.26	55.88	74.00	-18.12	peak
8	4995.000	39.13	3.26	42.39	54.00	-11.61	AVG
9	5045.600	52.07	3.33	55.40	74.00	-18.60	peak
10	5045.600	39.22	3.33	42.55	54.00	-11.45	AVG
11	5121.500	52.07	3.43	55.50	74.00	-18.50	peak
12	5121.500	39.56	3.43	42.99	54.00	-11.01	AVG
13	5150.000	50.38	3.47	53.85	74.00	-20.15	peak
14	5150.000	39.78	3.47	43.25	54.00	-10.75	AVG
15	5299.700	97.89	3.66	101.55	--	--	peak
16	5350.000	50.99	3.73	54.72	74.00	-19.28	peak
17	5350.000	40.68	3.73	44.41	54.00	-9.59	AVG
18	5387.700	51.75	3.79	55.54	74.00	-18.46	peak
19	5387.700	39.66	3.79	43.45	54.00	-10.55	AVG
20	5405.300	51.57	3.80	55.37	74.00	-18.63	peak
21	5405.300	39.21	3.80	43.01	54.00	-10.99	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

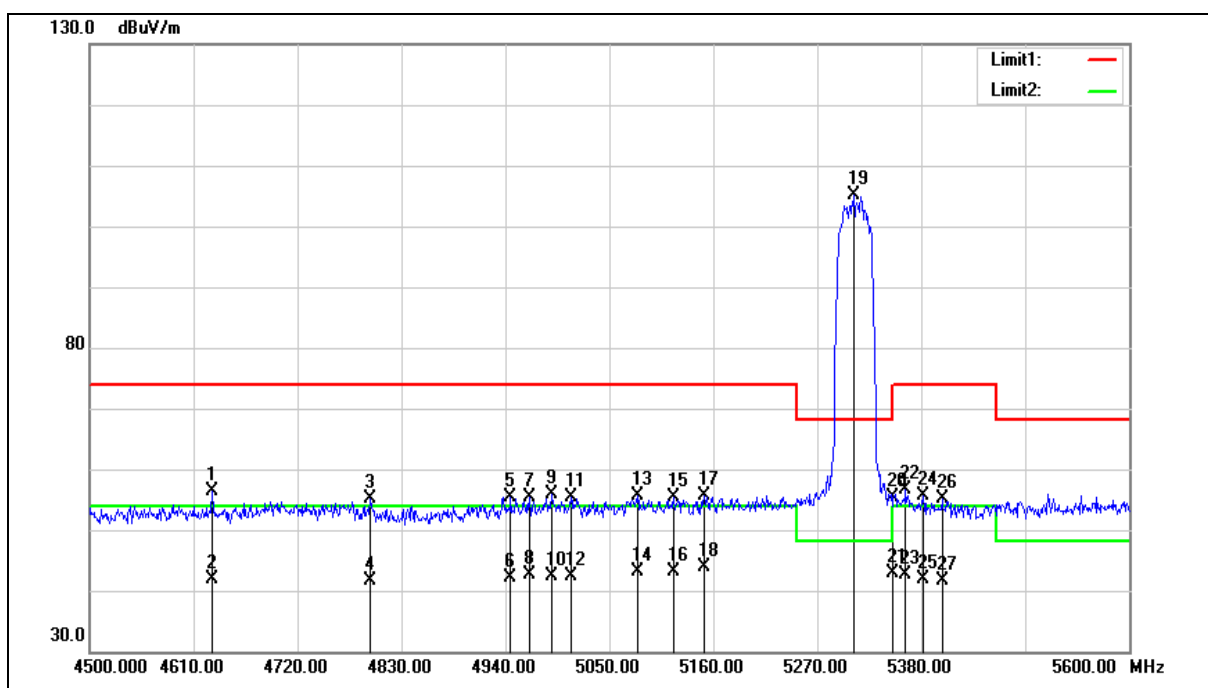

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4629.800	54.03	2.36	56.39	74.00	-17.61	peak
2	4629.800	39.61	2.36	41.97	54.00	-12.03	AVG
3	4797.000	52.35	2.77	55.12	74.00	-18.88	peak
4	4797.000	38.75	2.77	41.52	54.00	-12.48	AVG
5	4945.500	52.27	3.13	55.40	74.00	-18.60	peak
6	4945.500	38.93	3.13	42.06	54.00	-11.94	AVG
7	4965.300	52.31	3.18	55.49	74.00	-18.51	peak
8	4965.300	39.38	3.18	42.56	54.00	-11.44	AVG
9	4988.400	52.59	3.24	55.83	74.00	-18.17	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10	4988.400	39.13	3.24	42.37	54.00	-11.63	AVG
11	5009.300	52.09	3.28	55.37	74.00	-18.63	peak
12	5009.300	39.21	3.28	42.49	54.00	-11.51	AVG
13	5079.700	52.29	3.37	55.66	74.00	-18.34	peak
14	5079.700	39.68	3.37	43.05	54.00	-10.95	AVG
15	5118.200	51.95	3.42	55.37	74.00	-18.63	peak
16	5118.200	39.59	3.42	43.01	54.00	-10.99	AVG
17	5150.000	52.23	3.47	55.70	74.00	-18.30	peak
18	5150.000	40.49	3.47	43.96	54.00	-10.04	AVG
19	5308.500	101.44	3.68	105.12	--	--	peak
20	5350.000	51.76	3.73	55.49	74.00	-18.51	peak
21	5350.000	39.25	3.73	42.98	54.00	-11.02	AVG
22	5363.500	52.81	3.74	56.55	74.00	-17.45	peak
23	5363.500	38.91	3.74	42.65	54.00	-11.35	AVG
24	5382.200	51.74	3.78	55.52	74.00	-18.48	peak
25	5382.200	38.13	3.78	41.91	54.00	-12.09	AVG
26	5402.000	51.24	3.80	55.04	74.00	-18.96	peak
27	5402.000	37.87	3.80	41.67	54.00	-12.33	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

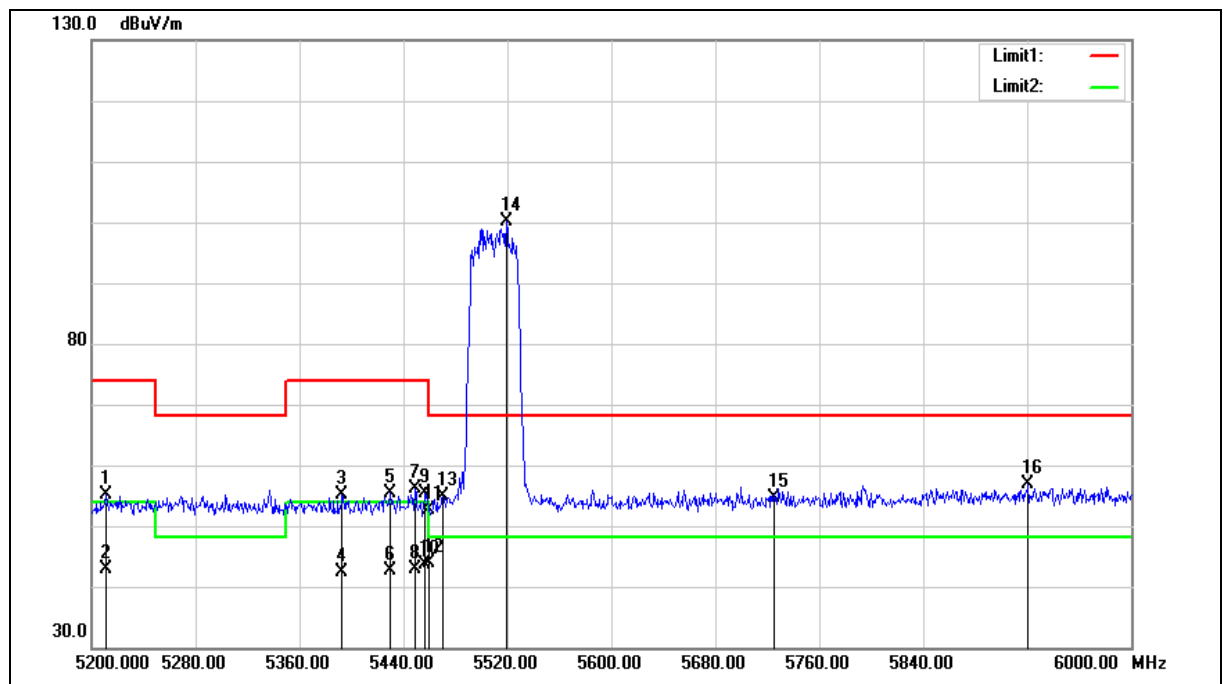

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5211.200	51.52	3.55	55.07	74.00	-18.93	peak
2	5211.200	39.38	3.55	42.93	54.00	-11.07	AVG
3	5392.800	51.32	3.79	55.11	74.00	-18.89	peak
4	5392.800	38.58	3.79	42.37	54.00	-11.63	AVG
5	5429.600	51.42	3.84	55.26	74.00	-18.74	peak
6	5429.600	38.67	3.84	42.51	54.00	-11.49	AVG
7	5448.800	52.34	3.87	56.21	74.00	-17.79	peak
8	5448.800	38.92	3.87	42.79	54.00	-11.21	AVG
9	5456.800	51.58	3.88	55.46	74.00	-18.54	peak
10	5456.800	39.75	3.88	43.63	54.00	-10.37	AVG
11	5460.000	48.77	3.88	52.65	74.00	-21.35	peak
12	5460.000	40.11	3.88	43.99	54.00	-10.01	AVG
13	5470.000	50.87	3.90	54.77	68.20	-13.43	peak
14	5519.200	96.09	3.97	100.06	--	--	peak
15	5725.000	50.36	4.39	54.75	68.20	-13.45	peak
16	5920.800	52.12	4.80	56.92	68.20	-11.28	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

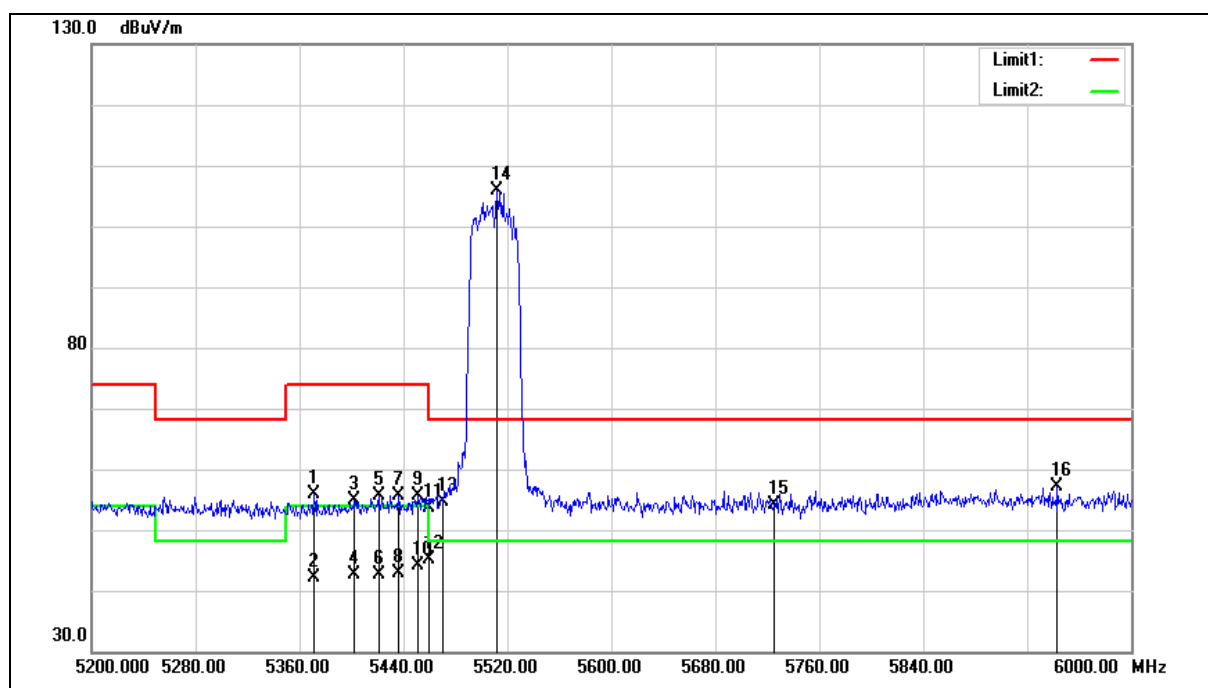

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5371.200	52.13	3.76	55.89	74.00	-18.11	peak
2	5371.200	38.47	3.76	42.23	54.00	-11.77	AVG
3	5402.400	51.09	3.80	54.89	74.00	-19.11	peak
4	5402.400	38.72	3.80	42.52	54.00	-11.48	AVG
5	5420.800	51.69	3.83	55.52	74.00	-18.48	peak
6	5420.800	38.87	3.83	42.70	54.00	-11.30	AVG
7	5436.000	51.78	3.85	55.63	74.00	-18.37	peak
8	5436.000	39.06	3.85	42.91	54.00	-11.09	AVG
9	5451.200	51.65	3.87	55.52	74.00	-18.48	peak
10	5451.200	40.28	3.87	44.15	54.00	-9.85	AVG
11	5460.000	49.79	3.88	53.67	74.00	-20.33	peak
12	5460.000	41.34	3.88	45.22	54.00	-8.78	AVG
13	5470.000	50.68	3.90	54.58	68.20	-13.62	peak
14	5512.000	101.88	3.96	105.84	--	--	peak
15	5725.000	49.64	4.39	54.03	68.20	-14.17	peak
16	5943.200	52.21	4.85	57.06	68.20	-11.14	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

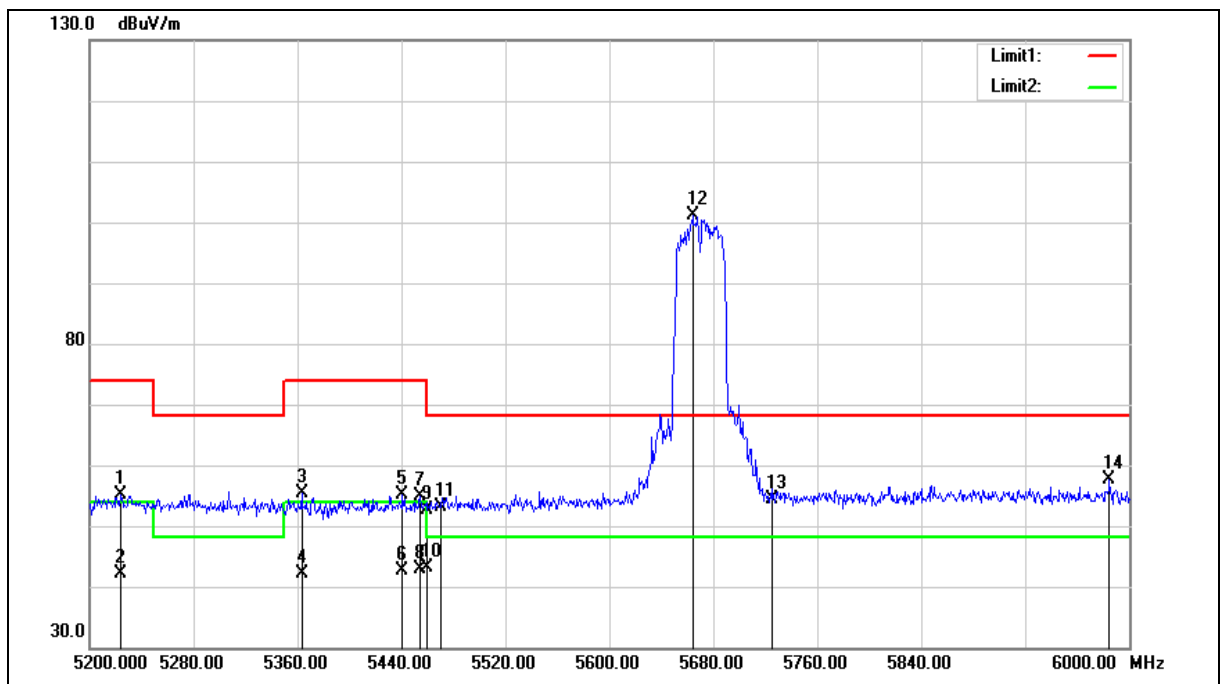

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5224.000	51.59	3.57	55.16	74.00	-18.84	peak
2	5224.000	38.44	3.57	42.01	54.00	-11.99	AVG
3	5363.200	51.70	3.74	55.44	74.00	-18.56	peak
4	5363.200	38.43	3.74	42.17	54.00	-11.83	AVG
5	5440.800	51.32	3.85	55.17	74.00	-18.83	peak
6	5440.800	38.73	3.85	42.58	54.00	-11.42	AVG
7	5454.400	51.13	3.87	55.00	74.00	-19.00	peak
8	5454.400	39.06	3.87	42.93	54.00	-11.07	AVG
9	5460.000	48.67	3.88	52.55	74.00	-21.45	peak
10	5460.000	39.28	3.88	43.16	54.00	-10.84	AVG
11	5470.000	49.14	3.90	53.04	68.20	-15.16	peak
12	5664.000	96.82	4.27	101.09	--	--	peak
13	5725.000	49.87	4.39	54.26	68.20	-13.94	peak
14	5984.800	52.80	4.93	57.73	68.20	-10.47	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

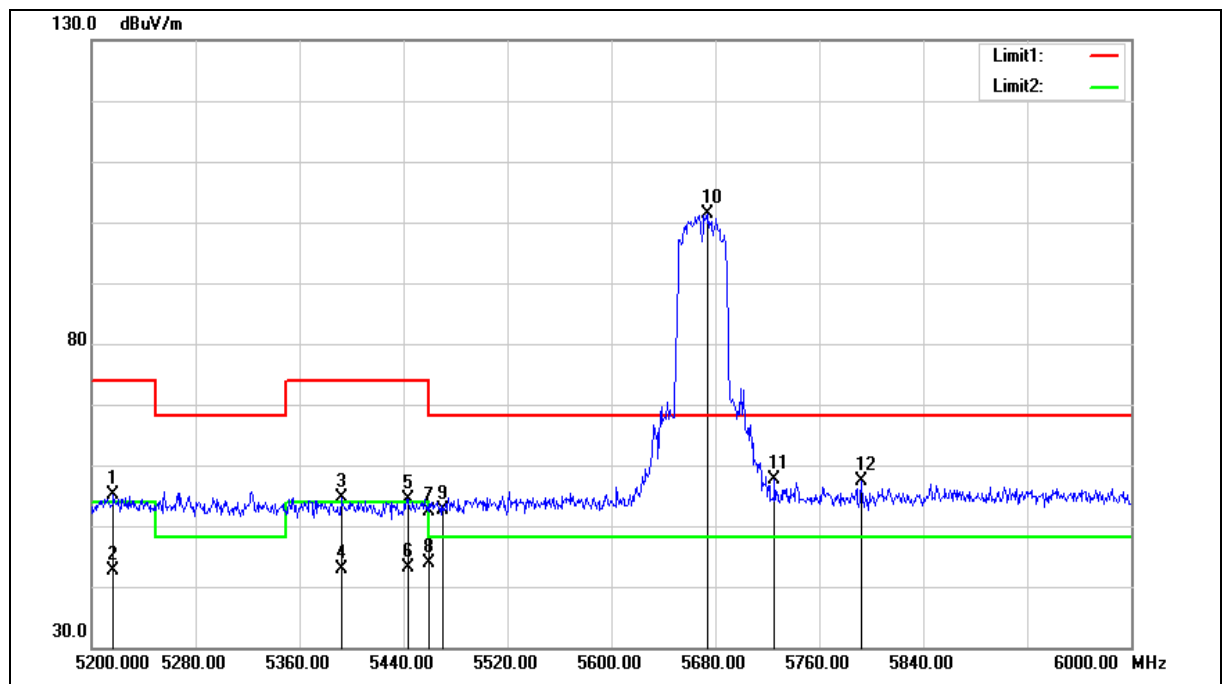

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5216.800	51.67	3.55	55.22	74.00	-18.78	peak
2	5216.800	39.06	3.55	42.61	54.00	-11.39	AVG
3	5392.000	50.86	3.79	54.65	74.00	-19.35	peak
4	5392.000	39.12	3.79	42.91	54.00	-11.09	AVG
5	5444.000	50.49	3.86	54.35	74.00	-19.65	peak
6	5444.000	39.28	3.86	43.14	54.00	-10.86	AVG
7	5460.000	48.43	3.88	52.31	74.00	-21.69	peak
8	5460.000	40.03	3.88	43.91	54.00	-10.09	AVG
9	5470.000	48.82	3.90	52.72	68.20	-15.48	peak
10	5674.400	97.20	4.29	101.49	--	--	peak
11	5725.000	53.24	4.39	57.63	68.20	-10.57	peak
12	5792.000	52.92	4.53	57.45	68.20	-10.75	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

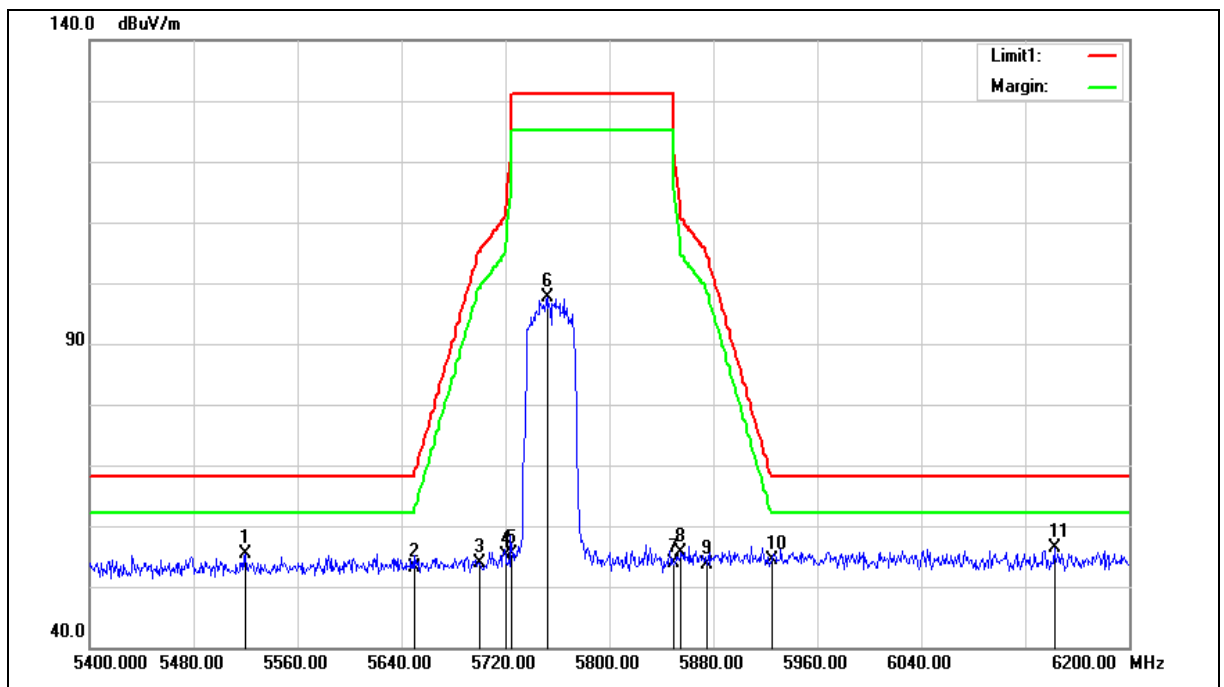

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5520.000	51.32	3.97	55.29	68.20	-12.91	peak
2	5650.000	48.93	4.24	53.17	68.20	-15.03	peak
3	5700.000	49.58	4.34	53.92	105.20	-51.28	peak
4	5720.000	50.78	4.38	55.16	110.80	-55.64	peak
5	5725.000	50.96	4.39	55.35	122.20	-66.85	peak
6	5752.000	93.12	4.45	97.57	--	--	peak
7	5850.000	49.26	4.65	53.91	122.20	-68.29	peak
8	5855.000	51.07	4.66	55.73	110.80	-55.07	peak
9	5875.000	49.01	4.70	53.71	105.20	-51.49	peak
10	5925.000	49.55	4.81	54.36	68.20	-13.84	peak
11	6142.400	50.97	5.43	56.40	68.20	-11.80	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

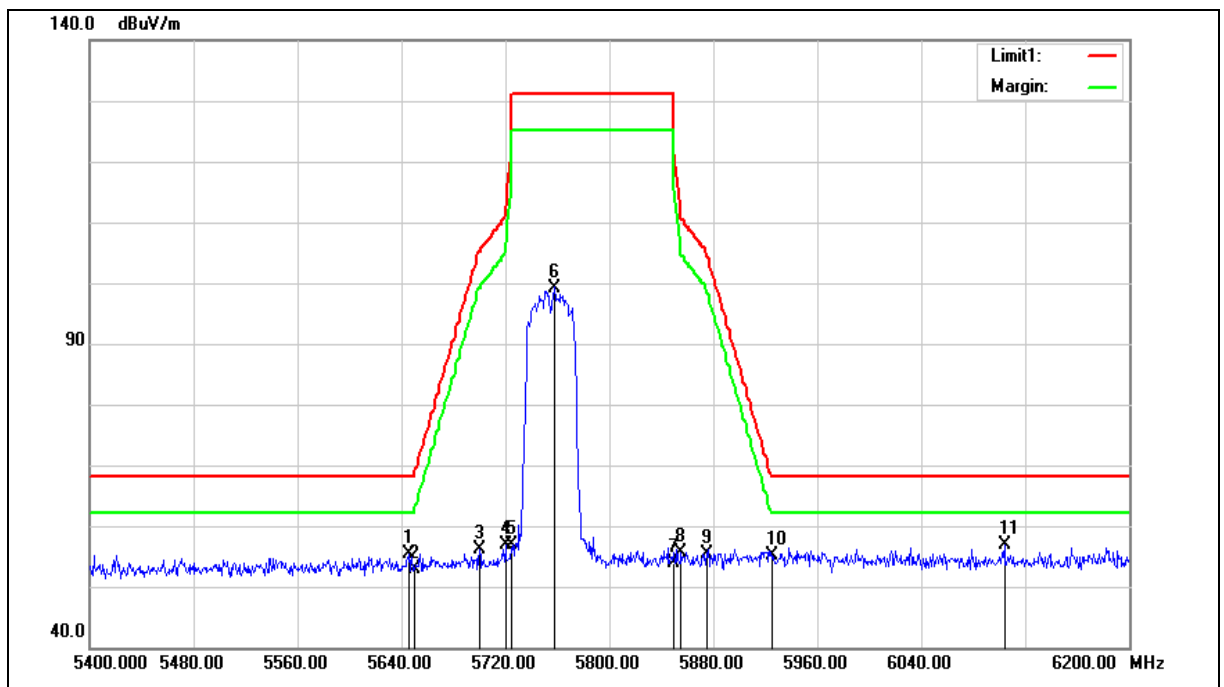

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5645.600	51.27	4.23	55.50	68.20	-12.70	peak
2	5650.000	48.71	4.24	52.95	68.20	-15.25	peak
3	5700.000	51.84	4.34	56.18	105.20	-49.02	peak
4	5720.000	52.46	4.38	56.84	110.80	-53.96	peak
5	5725.000	52.51	4.39	56.90	122.20	-65.30	peak
6	5757.600	94.79	4.46	99.25	--	--	peak
7	5850.000	49.35	4.65	54.00	122.20	-68.20	peak
8	5855.000	50.96	4.66	55.62	110.80	-55.18	peak
9	5875.000	50.77	4.70	55.47	105.20	-49.73	peak
10	5925.000	50.28	4.81	55.09	68.20	-13.11	peak
11	6104.000	51.53	5.30	56.83	68.20	-11.37	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

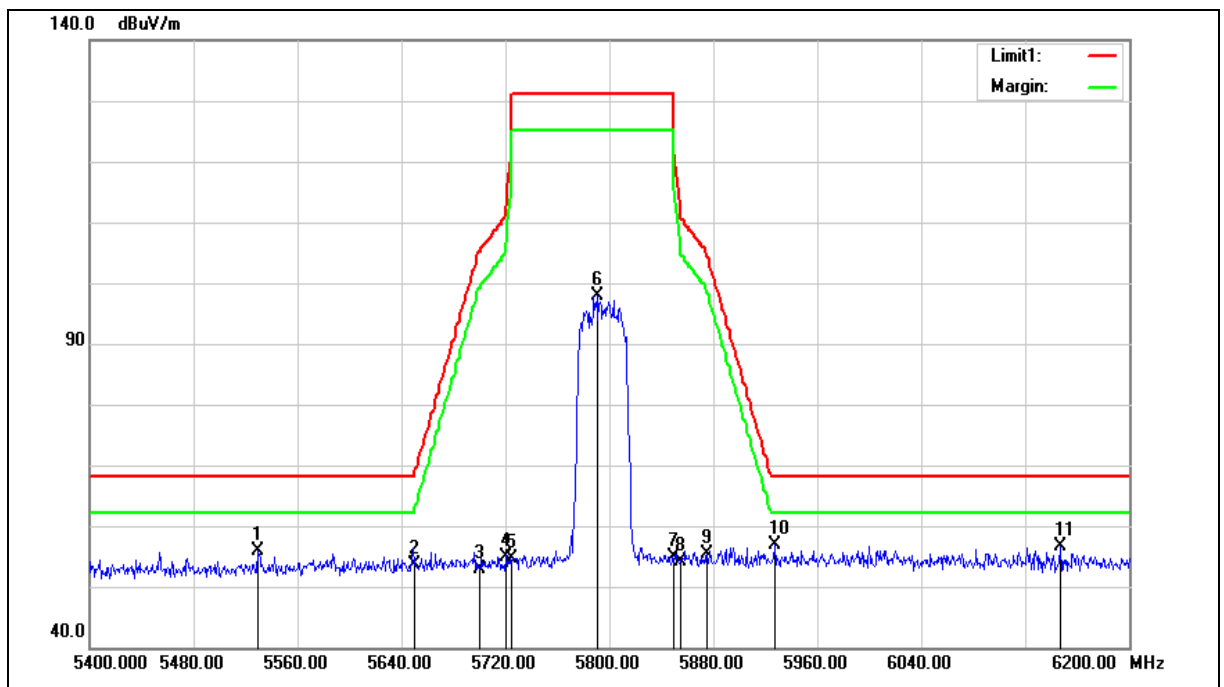

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5529.600	51.96	3.99	55.95	68.20	-12.25	peak
2	5650.000	49.27	4.24	53.51	68.20	-14.69	peak
3	5700.000	48.55	4.34	52.89	105.20	-52.31	peak
4	5720.000	50.49	4.38	54.87	110.80	-55.93	peak
5	5725.000	50.14	4.39	54.53	122.20	-67.67	peak
6	5790.400	93.41	4.52	97.93	--	--	peak
7	5850.000	50.35	4.65	55.00	122.20	-67.20	peak
8	5855.000	49.55	4.66	54.21	110.80	-56.59	peak
9	5875.000	50.67	4.70	55.37	105.20	-49.83	peak
10	5927.200	51.99	4.81	56.80	68.20	-11.40	peak
11	6147.200	51.21	5.44	56.65	68.20	-11.55	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

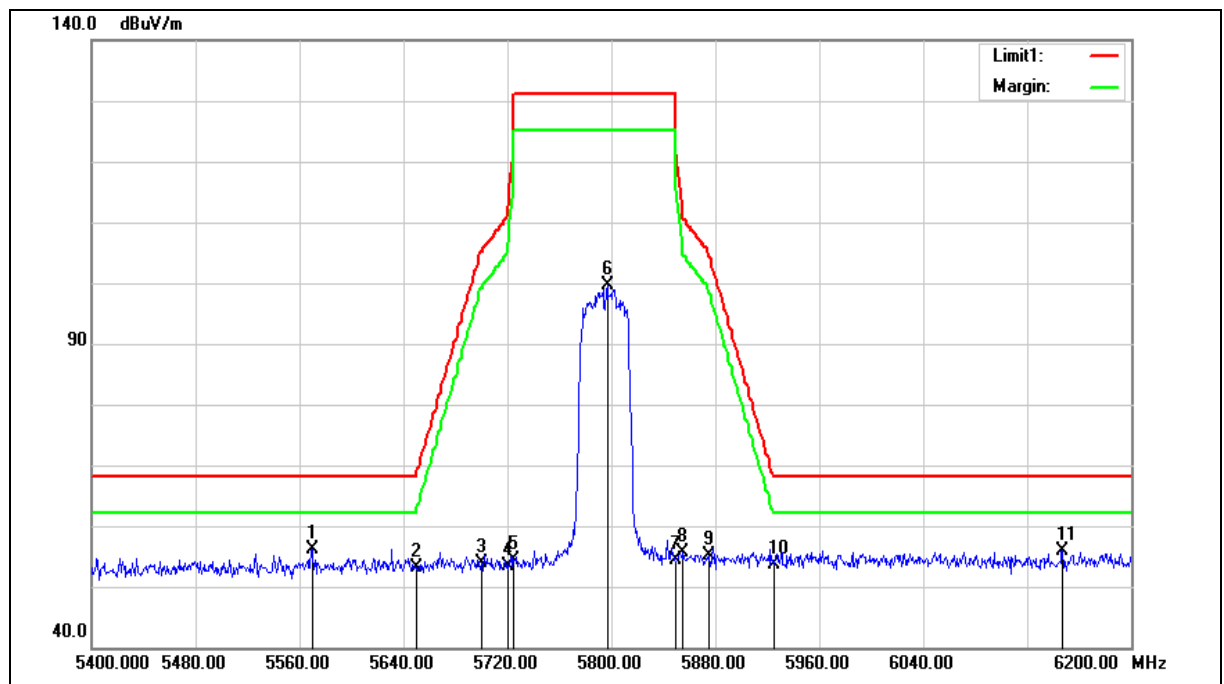

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5569.600	52.12	4.07	56.19	68.20	-12.01	peak
2	5650.000	49.00	4.24	53.24	68.20	-14.96	peak
3	5700.000	49.48	4.34	53.82	105.20	-51.38	peak
4	5720.000	48.90	4.38	53.28	110.80	-57.52	peak
5	5725.000	49.90	4.39	54.29	122.20	-67.91	peak
6	5796.800	95.14	4.53	99.67	--	--	peak
7	5850.000	49.66	4.65	54.31	122.20	-67.89	peak
8	5855.000	50.87	4.66	55.53	110.80	-55.27	peak
9	5875.000	50.54	4.70	55.24	105.20	-49.96	peak
10	5925.000	48.86	4.81	53.67	68.20	-14.53	peak
11	6147.200	50.51	5.44	55.95	68.20	-12.25	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

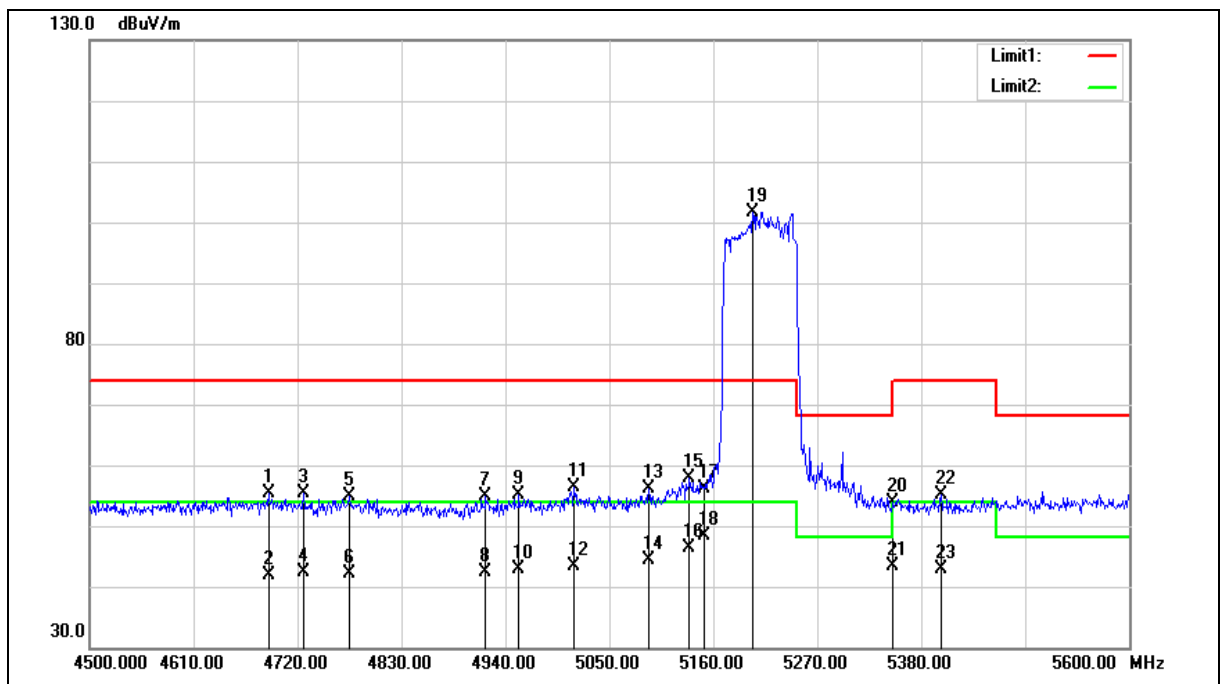

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4689.200	52.84	2.51	55.35	74.00	-18.65	peak
2	4689.200	39.42	2.51	41.93	54.00	-12.07	AVG
3	4726.600	52.65	2.61	55.26	74.00	-18.74	peak
4	4726.600	39.70	2.61	42.31	54.00	-11.69	AVG
5	4775.000	52.19	2.71	54.90	74.00	-19.10	peak
6	4775.000	39.37	2.71	42.08	54.00	-11.92	AVG
7	4919.100	51.73	3.07	54.80	74.00	-19.20	peak
8	4919.100	39.30	3.07	42.37	54.00	-11.63	AVG
9	4954.300	52.01	3.16	55.17	74.00	-18.83	peak
10	4954.300	39.75	3.16	42.91	54.00	-11.09	AVG
11	5012.600	53.04	3.29	56.33	74.00	-17.67	peak
12	5012.600	40.02	3.29	43.31	54.00	-10.69	AVG
13	5091.800	52.70	3.38	56.08	74.00	-17.92	peak
14	5091.800	41.12	3.38	44.50	54.00	-9.50	AVG
15	5134.700	54.49	3.45	57.94	74.00	-16.06	peak
16	5134.700	42.97	3.45	46.42	54.00	-7.58	AVG
17	5150.000	52.55	3.47	56.02	74.00	-17.98	peak
18	5150.000	45.01	3.47	48.48	54.00	-5.52	AVG
19	5201.800	98.07	3.54	101.61	--	--	peak
20	5350.000	50.16	3.73	53.89	74.00	-20.11	peak
21	5350.000	39.55	3.73	43.28	54.00	-10.72	AVG
22	5400.900	51.37	3.80	55.17	74.00	-18.83	peak
23	5400.900	39.02	3.80	42.82	54.00	-11.18	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

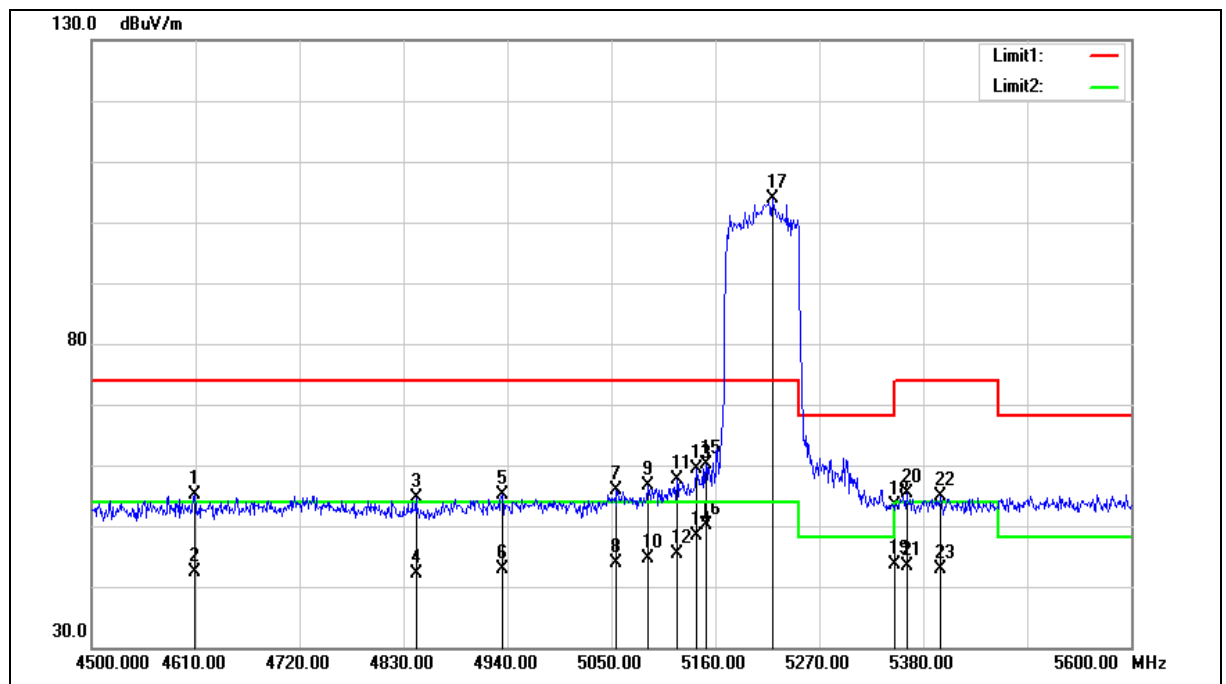

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4608.900	52.79	2.32	55.11	74.00	-18.89	peak
2	4608.900	39.96	2.32	42.28	54.00	-11.72	AVG
3	4843.200	51.77	2.88	54.65	74.00	-19.35	peak
4	4843.200	39.15	2.88	42.03	54.00	-11.97	AVG
5	4934.500	51.94	3.11	55.05	74.00	-18.95	peak
6	4934.500	39.82	3.11	42.93	54.00	-11.07	AVG
7	5055.500	52.65	3.34	55.99	74.00	-18.01	peak
8	5055.500	40.62	3.34	43.96	54.00	-10.04	AVG
9	5088.500	53.20	3.38	56.58	74.00	-17.42	peak
10	5088.500	41.13	3.38	44.51	54.00	-9.49	AVG
11	5119.300	54.29	3.43	57.72	74.00	-16.28	peak
12	5119.300	41.83	3.43	45.26	54.00	-8.74	AVG
13	5140.200	55.91	3.46	59.37	74.00	-14.63	peak
14	5140.200	44.83	3.46	48.29	54.00	-5.71	AVG
15	5150.000	56.73	3.47	60.20	74.00	-13.80	peak
16	5150.000	46.64	3.47	50.11	54.00	-3.89	AVG
17	5220.500	100.28	3.57	103.85	--	--	peak
18	5350.000	49.70	3.73	53.43	74.00	-20.57	peak
19	5350.000	39.90	3.73	43.63	54.00	-10.37	AVG
20	5362.400	51.66	3.74	55.40	74.00	-18.60	peak
21	5362.400	39.67	3.74	43.41	54.00	-10.59	AVG
22	5398.700	51.11	3.80	54.91	74.00	-19.09	peak
23	5398.700	39.19	3.80	42.99	54.00	-11.01	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

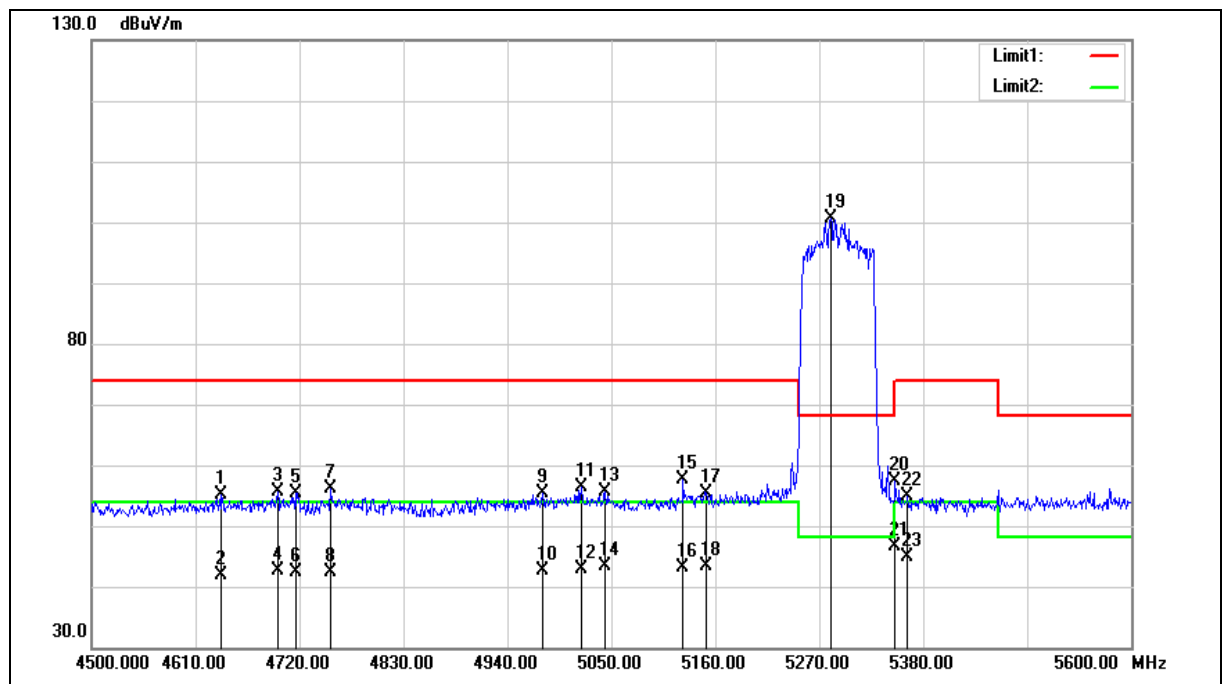

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4636.400	52.72	2.39	55.11	74.00	-18.89	peak
2	4636.400	39.60	2.39	41.99	54.00	-12.01	AVG
3	4696.900	53.06	2.52	55.58	74.00	-18.42	peak
4	4696.900	40.16	2.52	42.68	54.00	-11.32	AVG
5	4715.600	52.81	2.57	55.38	74.00	-18.62	peak
6	4715.600	39.91	2.57	42.48	54.00	-11.52	AVG
7	4753.000	53.57	2.67	56.24	74.00	-17.76	peak
8	4753.000	39.72	2.67	42.39	54.00	-11.61	AVG
9	4977.400	52.18	3.22	55.40	74.00	-18.60	peak
10	4977.400	39.37	3.22	42.59	54.00	-11.41	AVG
11	5018.100	53.02	3.29	56.31	74.00	-17.69	peak
12	5018.100	39.68	3.29	42.97	54.00	-11.03	AVG
13	5043.400	52.25	3.32	55.57	74.00	-18.43	peak
14	5043.400	40.06	3.32	43.38	54.00	-10.62	AVG
15	5125.900	54.25	3.44	57.69	74.00	-16.31	peak
16	5125.900	39.68	3.44	43.12	54.00	-10.88	AVG
17	5150.000	51.90	3.47	55.37	74.00	-18.63	peak
18	5150.000	39.84	3.47	43.31	54.00	-10.69	AVG
19	5282.100	97.07	3.65	100.72	--	--	peak
20	5350.000	53.74	3.73	57.47	74.00	-16.53	peak
21	5350.000	43.01	3.73	46.74	54.00	-7.26	AVG
22	5363.500	51.05	3.74	54.79	74.00	-19.21	peak
23	5363.500	41.08	3.74	44.82	54.00	-9.18	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

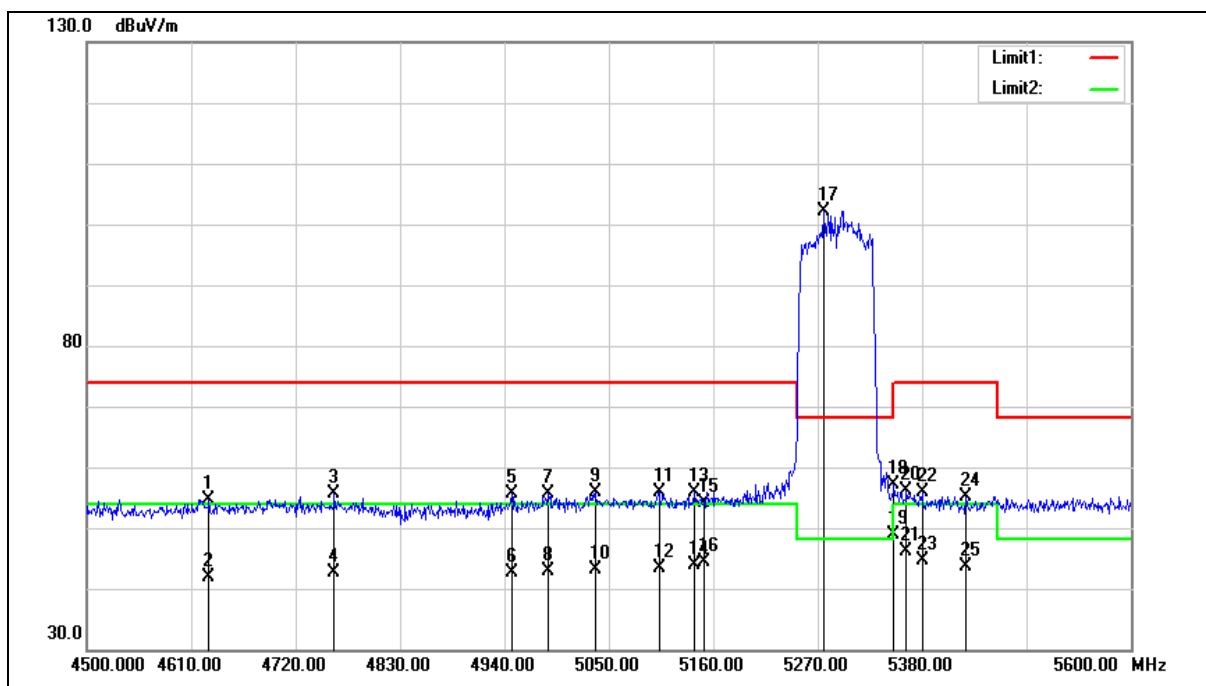

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4628.700	52.33	2.36	54.69	74.00	-19.31	peak
2	4628.700	39.63	2.36	41.99	54.00	-12.01	AVG
3	4760.700	52.89	2.69	55.58	74.00	-18.42	peak
4	4760.700	39.87	2.69	42.56	54.00	-11.44	AVG
5	4947.700	52.40	3.14	55.54	74.00	-18.46	peak
6	4947.700	39.45	3.14	42.59	54.00	-11.41	AVG
7	4986.200	52.41	3.24	55.65	74.00	-18.35	peak
8	4986.200	39.70	3.24	42.94	54.00	-11.06	AVG
9	5035.700	52.49	3.32	55.81	74.00	-18.19	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10	5035.700	39.71	3.32	43.03	54.00	-10.97	AVG
11	5102.800	52.44	3.40	55.84	74.00	-18.16	peak
12	5102.800	39.92	3.40	43.32	54.00	-10.68	AVG
13	5140.200	52.54	3.46	56.00	74.00	-18.00	peak
14	5140.200	40.50	3.46	43.96	54.00	-10.04	AVG
15	5150.000	50.71	3.47	54.18	74.00	-19.82	peak
16	5150.000	40.89	3.47	44.36	54.00	-9.64	AVG
17	5276.600	98.51	3.63	102.14	--	--	peak
18	5350.000	53.39	3.73	57.12	74.00	-16.88	peak
19	5350.000	45.08	3.73	48.81	54.00	-5.19	AVG
20	5363.500	52.31	3.74	56.05	74.00	-17.95	peak
21	5363.500	42.37	3.74	46.11	54.00	-7.89	AVG
22	5380.000	51.99	3.77	55.76	74.00	-18.24	peak
23	5380.000	40.80	3.77	44.57	54.00	-9.43	AVG
24	5426.200	51.21	3.83	55.04	74.00	-18.96	peak
25	5426.200	39.83	3.83	43.66	54.00	-10.34	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

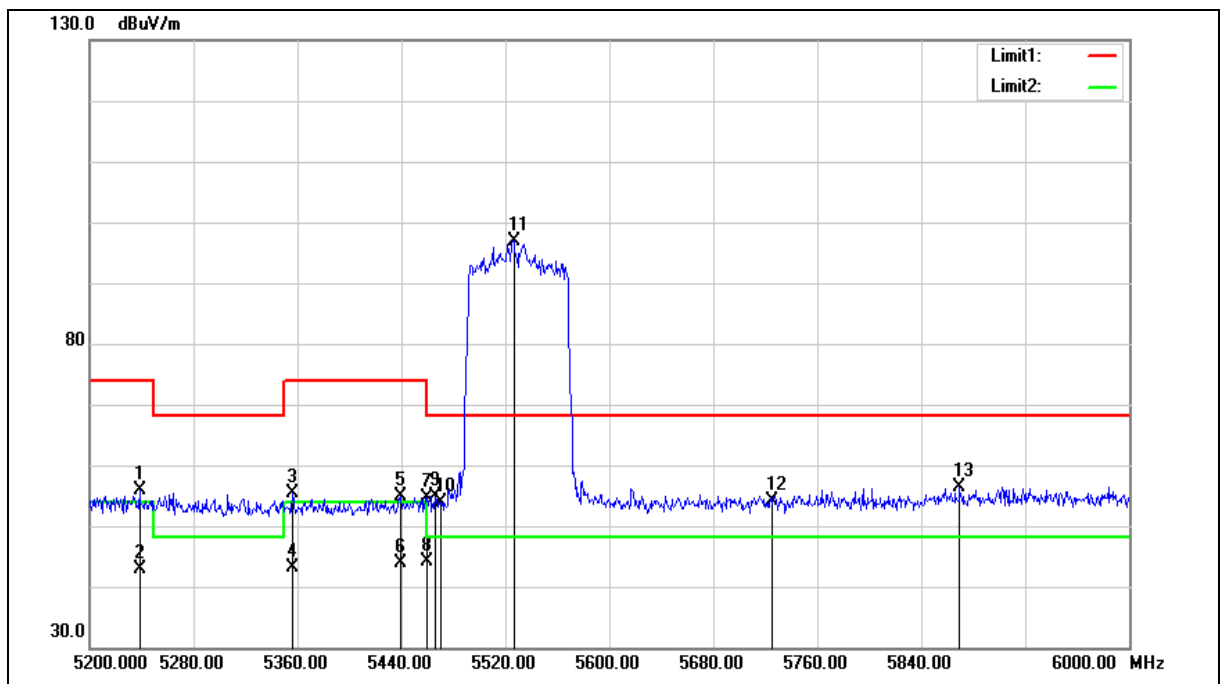

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5238.400	52.29	3.58	55.87	74.00	-18.13	peak
2	5238.400	39.29	3.58	42.87	54.00	-11.13	AVG
3	5356.000	51.57	3.73	55.30	74.00	-18.70	peak
4	5356.000	39.41	3.73	43.14	54.00	-10.86	AVG
5	5439.200	51.13	3.85	54.98	74.00	-19.02	peak
6	5439.200	39.94	3.85	43.79	54.00	-10.21	AVG
7	5460.000	50.73	3.88	54.61	74.00	-19.39	peak
8	5460.000	40.29	3.88	44.17	54.00	-9.83	AVG
9	5465.600	50.89	3.88	54.77	68.20	-13.43	peak
10	5470.000	49.88	3.90	53.78	68.20	-14.42	peak
11	5526.400	92.96	3.98	96.94	--	--	peak
12	5725.000	49.78	4.39	54.17	68.20	-14.03	peak
13	5869.600	51.72	4.69	56.41	68.20	-11.79	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

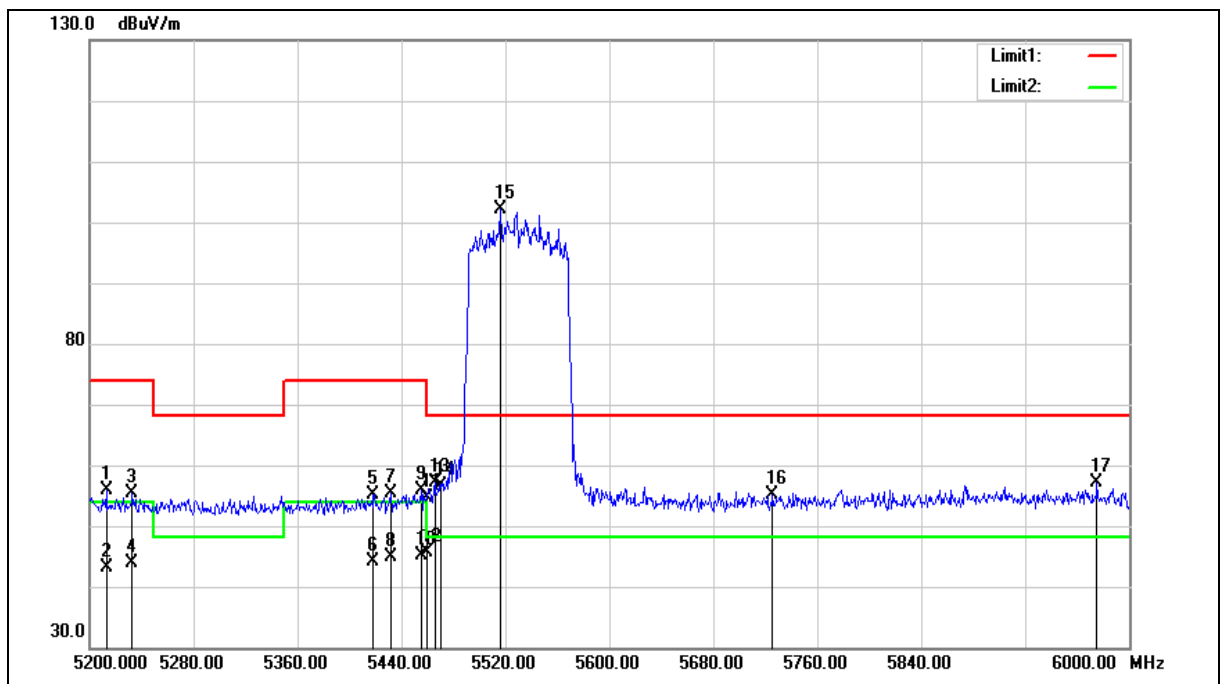

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5212.800	52.40	3.55	55.95	74.00	-18.05	peak
2	5212.800	39.65	3.55	43.20	54.00	-10.80	AVG
3	5232.800	51.71	3.58	55.29	74.00	-18.71	peak
4	5232.800	40.30	3.58	43.88	54.00	-10.12	AVG
5	5418.400	51.40	3.82	55.22	74.00	-18.78	peak
6	5418.400	40.28	3.82	44.10	54.00	-9.90	AVG
7	5432.000	51.47	3.85	55.32	74.00	-18.68	peak
8	5432.000	41.04	3.85	44.89	54.00	-9.11	AVG
9	5455.200	52.07	3.87	55.94	74.00	-18.06	peak
10	5455.200	41.32	3.87	45.19	54.00	-8.81	AVG
11	5460.000	50.78	3.88	54.66	74.00	-19.34	peak
12	5460.000	41.64	3.88	45.52	54.00	-8.48	AVG
13	5465.600	53.23	3.88	57.11	68.20	-11.09	peak
14	5470.000	52.77	3.90	56.67	68.20	-11.53	peak
15	5516.000	98.22	3.97	102.19	--	--	peak
16	5725.000	50.76	4.39	55.15	68.20	-13.05	peak
17	5975.200	52.20	4.91	57.11	68.20	-11.09	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

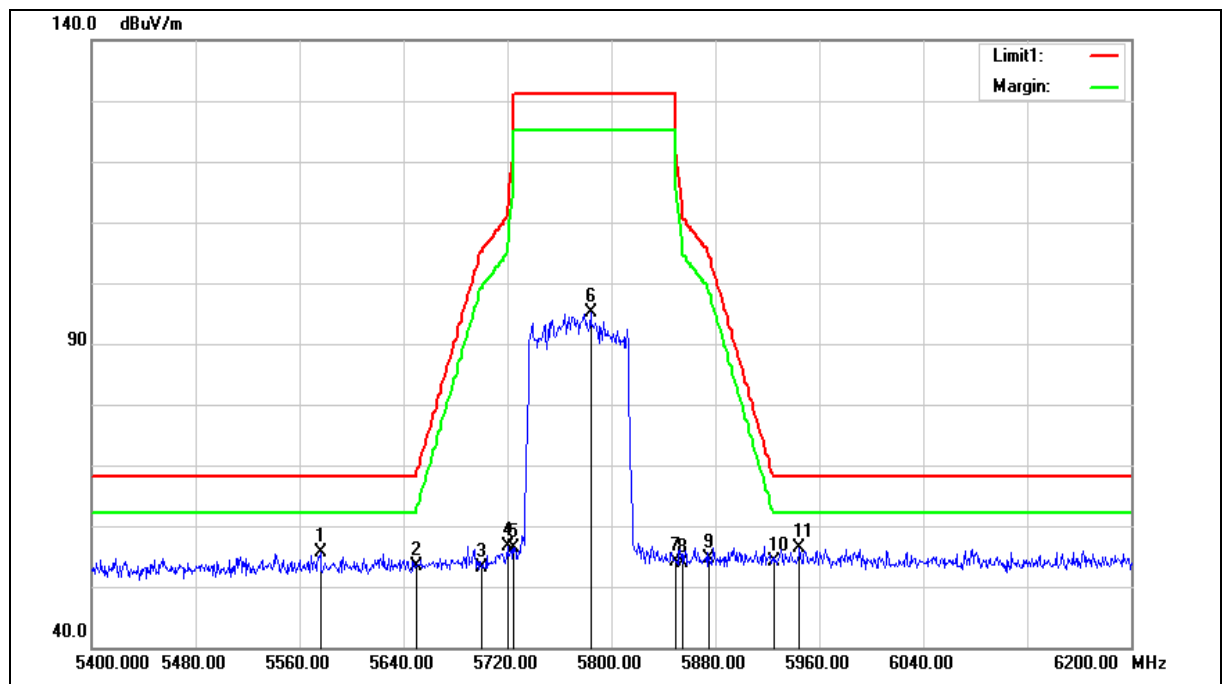

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5576.000	51.58	4.08	55.66	68.20	-12.54	peak
2	5650.000	49.08	4.24	53.32	68.20	-14.88	peak
3	5700.000	48.86	4.34	53.20	105.20	-52.00	peak
4	5720.000	52.22	4.38	56.60	110.80	-54.20	peak
5	5725.000	52.00	4.39	56.39	122.20	-65.81	peak
6	5784.000	90.62	4.51	95.13	--	--	peak
7	5850.000	49.43	4.65	54.08	122.20	-68.12	peak
8	5855.000	49.24	4.66	53.90	110.80	-56.90	peak
9	5875.000	49.97	4.70	54.67	105.20	-50.53	peak
10	5925.000	49.38	4.81	54.19	68.20	-14.01	peak
11	5944.800	51.62	4.85	56.47	68.20	-11.73	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

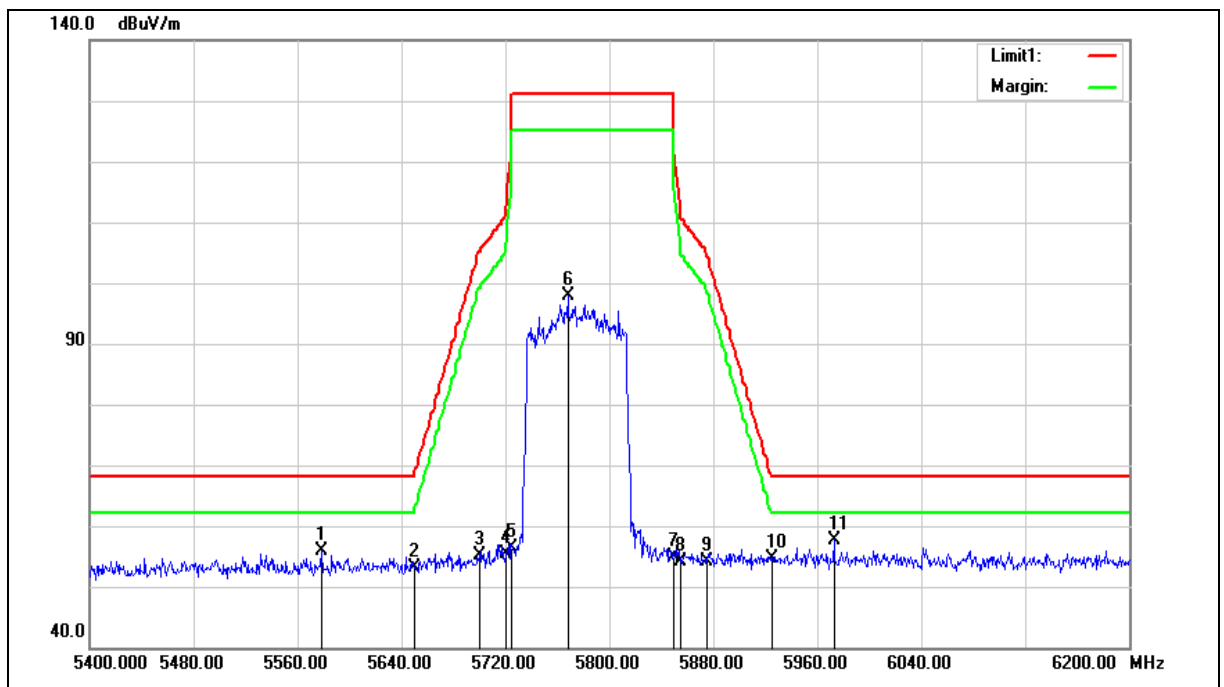

Standard:	LP0002	Test Distance:	3m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5578.400	51.84	4.09	55.93	68.20	-12.27	peak
2	5650.000	48.88	4.24	53.12	68.20	-15.08	peak
3	5700.000	50.79	4.34	55.13	105.20	-50.07	peak
4	5720.000	50.98	4.38	55.36	110.80	-55.44	peak
5	5725.000	52.04	4.39	56.43	122.20	-65.77	peak
6	5768.000	93.42	4.48	97.90	--	--	peak
7	5850.000	50.34	4.65	54.99	122.20	-67.21	peak
8	5855.000	49.38	4.66	54.04	110.80	-56.76	peak
9	5875.000	49.36	4.70	54.06	105.20	-51.14	peak
10	5925.000	49.81	4.81	54.62	68.20	-13.58	peak
11	5972.800	52.82	4.91	57.73	68.20	-10.47	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Annex E. Conducted Test Results

Maximum Conducted Output Power Measurement

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)		
				ANT-0		Limit (dBm)
				dBm	W	
Mode 6	6	36	5180.0	13.66	0.023	≤ 24.00
		40	5200.0	13.52	0.022	≤ 24.00
		44	5220.0	13.41	0.022	≤ 24.00
		48	5240.0	13.56	0.023	≤ 24.00
		52	5260.0	10.39	0.011	≤ 23.91
		56	5280.0	10.17	0.010	≤ 23.91
		60	5300.0	10.06	0.010	≤ 23.91
		64	5320.0	10.02	0.010	≤ 23.91
		100	5500.0	10.58	0.011	≤ 24.00
		104	5520.0	10.56	0.011	≤ 24.00
		108	5540.0	10.90	0.012	≤ 24.00
		112	5560.0	10.92	0.012	≤ 24.00
		116	5580.0	10.88	0.012	≤ 24.00
		132	5660.0	10.82	0.012	≤ 24.00
		136	5680.0	10.84	0.012	≤ 24.00
		140	5700.0	10.76	0.012	≤ 24.00
		149	5745.0	6.23	0.004	≤ 30.00
		153	5765.0	6.10	0.004	≤ 30.00
		157	5785.0	6.13	0.004	≤ 30.00
		161	5805.0	6.10	0.004	≤ 30.00
		165	5825.0	6.16	0.004	≤ 30.00

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)		
				ANT-0		Limit (dBm)
				dBm	W	
Mode 7	14.4	36	5180.0	13.51	0.022	≤ 23.59
		40	5200.0	13.40	0.022	≤ 23.59
		44	5220.0	13.31	0.021	≤ 23.59
		48	5240.0	13.24	0.021	≤ 23.59
		52	5260.0	10.20	0.010	≤ 23.79
		56	5280.0	10.14	0.010	≤ 23.79
		60	5300.0	10.00	0.010	≤ 23.79
		64	5320.0	10.16	0.010	≤ 23.79
		100	5500.0	10.40	0.011	≤ 23.58
		104	5520.0	10.52	0.011	≤ 23.58
		108	5540.0	10.73	0.012	≤ 23.58
		112	5560.0	10.84	0.012	≤ 23.58
		116	5580.0	10.79	0.012	≤ 23.58
		132	5660.0	10.83	0.012	≤ 23.58
		136	5680.0	10.78	0.012	≤ 23.58
		140	5700.0	10.70	0.012	≤ 23.58
		149	5745.0	6.14	0.004	≤ 29.49
		153	5765.0	6.02	0.004	≤ 29.49
		157	5785.0	6.04	0.004	≤ 29.49
		161	5805.0	6.00	0.004	≤ 29.49
		165	5825.0	6.02	0.004	≤ 29.49
Mode 8	30	38	5190.0	13.52	0.022	≤ 23.59
		46	5230.0	13.37	0.022	≤ 23.59
		54	5270.0	10.18	0.010	≤ 23.79
		62	5310.0	10.28	0.011	≤ 23.79
		102	5510.0	10.73	0.012	≤ 23.58
		110	5550.0	10.58	0.011	≤ 23.58
		134	5670.0	10.74	0.012	≤ 23.58
		151	5755.0	6.18	0.004	≤ 29.49
		159	5795.0	6.17	0.004	≤ 29.49

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)		
				ANT-0		Limit (dBm)
				dBm	W	
Mode 9	14.4	36	5180.0	13.58	0.023	≤ 23.59
		40	5200.0	13.46	0.022	≤ 23.59
		44	5220.0	13.34	0.022	≤ 23.59
		48	5240.0	13.25	0.021	≤ 23.59
		52	5260.0	10.32	0.011	≤ 23.77
		56	5280.0	10.19	0.010	≤ 23.77
		60	5300.0	10.03	0.010	≤ 23.77
		64	5320.0	10.22	0.011	≤ 23.77
		100	5500.0	10.46	0.011	≤ 23.58
		104	5520.0	10.59	0.011	≤ 23.58
		108	5540.0	10.77	0.012	≤ 23.58
		112	5560.0	10.89	0.012	≤ 23.58
		116	5580.0	10.82	0.012	≤ 23.58
		132	5660.0	10.88	0.012	≤ 23.58
		136	5680.0	10.82	0.012	≤ 23.58
		140	5700.0	10.21	0.010	≤ 23.58
		149	5745.0	6.21	0.004	≤ 29.49
		153	5765.0	6.07	0.004	≤ 29.49
		157	5785.0	6.11	0.004	≤ 29.49
		161	5805.0	6.09	0.004	≤ 29.49
		165	5825.0	6.18	0.004	≤ 29.49
Mode 10	30	38	5190.0	13.58	0.023	≤ 23.59
		46	5230.0	13.42	0.022	≤ 23.59
		54	5270.0	10.35	0.011	≤ 23.79
		62	5310.0	10.42	0.011	≤ 23.79
		102	5510.0	10.47	0.011	≤ 23.58
		110	5550.0	10.74	0.012	≤ 23.58
		134	5670.0	10.91	0.012	≤ 23.58
		151	5755.0	6.24	0.004	≤ 29.49
		159	5795.0	6.22	0.004	≤ 29.49
Mode 11	58.6	42	5210.0	13.79	0.024	≤ 23.59
		58	5290.0	10.06	0.010	≤ 23.79
		106	5530.0	10.73	0.012	≤ 23.58
		155	5775.0	6.01	0.004	≤ 29.49

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)		
				ANT-1		Limit (dBm)
				dBm	W	
Mode 6	6	36	5180.0	13.12	0.021	≤ 24.00
		40	5200.0	13.22	0.021	≤ 24.00
		44	5220.0	13.21	0.021	≤ 24.00
		48	5240.0	13.34	0.022	≤ 24.00
		52	5260.0	10.17	0.010	≤ 23.91
		56	5280.0	10.16	0.010	≤ 23.91
		60	5300.0	10.15	0.010	≤ 23.91
		64	5320.0	10.05	0.010	≤ 23.91
		100	5500.0	10.22	0.011	≤ 24.00
		104	5520.0	10.12	0.010	≤ 24.00
		108	5540.0	10.06	0.010	≤ 24.00
		112	5560.0	10.21	0.010	≤ 24.00
		116	5580.0	10.04	0.010	≤ 24.00
		132	5660.0	10.19	0.010	≤ 24.00
		136	5680.0	10.16	0.010	≤ 24.00
		140	5700.0	10.36	0.011	≤ 24.00
		149	5745.0	6.41	0.004	≤ 30.00
		153	5765.0	6.39	0.004	≤ 30.00
		157	5785.0	6.60	0.005	≤ 30.00
		161	5805.0	6.36	0.004	≤ 30.00
		165	5825.0	6.22	0.004	≤ 30.00

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)		
				ANT-1		Limit (dBm)
				dBm	W	
Mode 7	14.4	36	5180.0	13.06	0.020	≤ 23.59
		40	5200.0	13.23	0.021	≤ 23.59
		44	5220.0	13.22	0.021	≤ 23.59
		48	5240.0	13.26	0.021	≤ 23.59
		52	5260.0	10.24	0.011	≤ 23.79
		56	5280.0	10.28	0.011	≤ 23.79
		60	5300.0	10.26	0.011	≤ 23.79
		64	5320.0	10.62	0.012	≤ 23.79
		100	5500.0	10.33	0.011	≤ 23.58
		104	5520.0	10.26	0.011	≤ 23.58
		108	5540.0	10.18	0.010	≤ 23.58
		112	5560.0	10.37	0.011	≤ 23.58
		116	5580.0	10.15	0.010	≤ 23.58
		132	5660.0	10.29	0.011	≤ 23.58
		136	5680.0	10.28	0.011	≤ 23.58
		140	5700.0	10.04	0.010	≤ 23.58
		149	5745.0	6.48	0.004	≤ 29.49
		153	5765.0	6.47	0.004	≤ 29.49
		157	5785.0	6.67	0.005	≤ 29.49
		161	5805.0	6.62	0.005	≤ 29.49
		165	5825.0	6.74	0.005	≤ 29.49
Mode 8	30	38	5190.0	13.17	0.021	≤ 23.59
		46	5230.0	13.22	0.021	≤ 23.59
		54	5270.0	10.14	0.010	≤ 23.79
		62	5310.0	10.37	0.011	≤ 23.79
		102	5510.0	10.17	0.010	≤ 23.58
		110	5550.0	10.11	0.010	≤ 23.58
		134	5670.0	10.17	0.010	≤ 23.58
		151	5755.0	6.47	0.004	≤ 29.49
		159	5795.0	6.62	0.005	≤ 29.49

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)		
				ANT-1		Limit (dBm)
				dBm	W	
Mode 9	14.4	36	5180.0	13.21	0.021	≤ 23.59
		40	5200.0	13.27	0.021	≤ 23.59
		44	5220.0	13.23	0.021	≤ 23.59
		48	5240.0	13.21	0.021	≤ 23.59
		52	5260.0	10.28	0.011	≤ 23.77
		56	5280.0	10.36	0.011	≤ 23.77
		60	5300.0	10.34	0.011	≤ 23.77
		64	5320.0	10.67	0.012	≤ 23.77
		100	5500.0	10.34	0.011	≤ 23.58
		104	5520.0	10.30	0.011	≤ 23.58
		108	5540.0	10.22	0.011	≤ 23.58
		112	5560.0	10.43	0.011	≤ 23.58
		116	5580.0	10.17	0.010	≤ 23.58
		132	5660.0	10.32	0.011	≤ 23.58
		136	5680.0	10.34	0.011	≤ 23.58
		140	5700.0	10.05	0.010	≤ 23.58
		149	5745.0	6.59	0.005	≤ 29.49
		153	5765.0	6.67	0.005	≤ 29.49
		157	5785.0	6.69	0.005	≤ 29.49
		161	5805.0	6.58	0.005	≤ 29.49
		165	5825.0	6.77	0.005	≤ 29.49
Mode 10	30	38	5190.0	13.19	0.021	≤ 23.59
		46	5230.0	13.27	0.021	≤ 23.59
		54	5270.0	10.32	0.011	≤ 23.79
		62	5310.0	10.67	0.012	≤ 23.79
		102	5510.0	10.12	0.010	≤ 23.58
		110	5550.0	10.20	0.010	≤ 23.58
		134	5670.0	10.19	0.010	≤ 23.58
		151	5755.0	6.52	0.004	≤ 29.49
		159	5795.0	6.70	0.005	≤ 29.49
Mode 11	58.6	42	5210.0	13.22	0.021	≤ 23.59
		58	5290.0	9.88	0.010	≤ 23.79
		106	5530.0	9.83	0.010	≤ 23.58
		155	5775.0	6.57	0.005	≤ 29.49

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)		
				ANT-0+1		Limit (dBm)
				dBm	W	
Mode 6	6	36	5180.0	16.41	0.044	≤ 24.00
		40	5200.0	16.38	0.043	≤ 24.00
		44	5220.0	16.32	0.043	≤ 24.00
		48	5240.0	16.46	0.044	≤ 24.00
		52	5260.0	13.29	0.021	≤ 23.91
		56	5280.0	13.18	0.021	≤ 23.91
		60	5300.0	13.12	0.020	≤ 23.91
		64	5320.0	13.05	0.020	≤ 23.91
		100	5500.0	13.41	0.022	≤ 24.00
		104	5520.0	13.36	0.022	≤ 24.00
		108	5540.0	13.51	0.022	≤ 24.00
		112	5560.0	13.59	0.023	≤ 24.00
		116	5580.0	13.49	0.022	≤ 24.00
		132	5660.0	13.53	0.023	≤ 24.00
		136	5680.0	13.52	0.023	≤ 24.00
		140	5700.0	13.57	0.023	≤ 24.00
		149	5745.0	9.33	0.009	≤ 30.00
		153	5765.0	9.26	0.008	≤ 30.00
		157	5785.0	9.38	0.009	≤ 30.00
		161	5805.0	9.24	0.008	≤ 30.00
		165	5825.0	9.20	0.008	≤ 30.00

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)		
				ANT-0+1		Limit (dBm)
				dBm	W	
Mode 7	14.4	36	5180.0	16.30	0.043	≤ 23.59
		40	5200.0	16.33	0.043	≤ 23.59
		44	5220.0	16.28	0.042	≤ 23.59
		48	5240.0	16.26	0.042	≤ 23.59
		52	5260.0	13.23	0.021	≤ 23.79
		56	5280.0	13.22	0.021	≤ 23.79
		60	5300.0	13.14	0.021	≤ 23.79
		64	5320.0	13.41	0.022	≤ 23.79
		100	5500.0	13.38	0.022	≤ 23.58
		104	5520.0	13.40	0.022	≤ 23.58
		108	5540.0	13.47	0.022	≤ 23.58
		112	5560.0	13.62	0.023	≤ 23.58
		116	5580.0	13.49	0.022	≤ 23.58
		132	5660.0	13.58	0.023	≤ 23.58
		136	5680.0	13.55	0.023	≤ 23.58
		140	5700.0	13.39	0.022	≤ 23.58
		149	5745.0	9.32	0.009	≤ 29.49
		153	5765.0	9.26	0.008	≤ 29.49
		157	5785.0	9.38	0.009	≤ 29.49
		161	5805.0	9.33	0.009	≤ 29.49
		165	5825.0	9.41	0.009	≤ 29.49
Mode 8	30	38	5190.0	16.36	0.043	≤ 23.59
		46	5230.0	16.31	0.043	≤ 23.59
		54	5270.0	13.17	0.021	≤ 23.79
		62	5310.0	13.34	0.022	≤ 23.79
		102	5510.0	13.47	0.022	≤ 23.58
		110	5550.0	13.36	0.022	≤ 23.58
		134	5670.0	13.47	0.022	≤ 23.58
		151	5755.0	9.34	0.009	≤ 29.49
		159	5795.0	9.41	0.009	≤ 29.49

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)		
				ANT-0+1		Limit (dBm)
				dBm	W	
Mode 9	14.4	36	5180.0	16.41	0.044	≤ 23.59
		40	5200.0	16.38	0.043	≤ 23.59
		44	5220.0	16.30	0.043	≤ 23.59
		48	5240.0	16.24	0.042	≤ 23.59
		52	5260.0	13.31	0.021	≤ 23.77
		56	5280.0	13.29	0.021	≤ 23.77
		60	5300.0	13.20	0.021	≤ 23.77
		64	5320.0	13.46	0.022	≤ 23.77
		100	5500.0	13.41	0.022	≤ 23.58
		104	5520.0	13.46	0.022	≤ 23.58
		108	5540.0	13.51	0.022	≤ 23.58
		112	5560.0	13.68	0.023	≤ 23.58
		116	5580.0	13.52	0.022	≤ 23.58
		132	5660.0	13.62	0.023	≤ 23.58
		136	5680.0	13.60	0.023	≤ 23.58
		140	5700.0	13.14	0.021	≤ 23.58
		149	5745.0	9.41	0.009	≤ 29.49
		153	5765.0	9.39	0.009	≤ 29.49
		157	5785.0	9.42	0.009	≤ 29.49
		161	5805.0	9.35	0.009	≤ 29.49
		165	5825.0	9.50	0.009	≤ 29.49
Mode 10	30	38	5190.0	16.40	0.044	≤ 23.59
		46	5230.0	16.36	0.043	≤ 23.59
		54	5270.0	13.35	0.022	≤ 23.79
		62	5310.0	13.56	0.023	≤ 23.79
		102	5510.0	13.31	0.021	≤ 23.58
		110	5550.0	13.49	0.022	≤ 23.58
		134	5670.0	13.58	0.023	≤ 23.58
		151	5755.0	9.39	0.009	≤ 29.49
		159	5795.0	9.48	0.009	≤ 29.49
Mode 11	58.6	42	5210.0	16.52	0.045	≤ 23.59
		58	5290.0	12.98	0.020	≤ 23.79
		106	5530.0	13.31	0.021	≤ 23.58
		155	5775.0	9.31	0.009	≤ 29.49

Maximum Power Spectral Density Measurement

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 6	36	5180.0	2.544	0.122	2.666	10.59
	40	5200.0	2.518	0.122	2.640	10.59
	48	5240.0	2.696	0.122	2.818	10.59
	52	5260.0	-0.187	0.122	-0.065	10.79
	56	5280.0	-0.240	0.122	-0.118	10.79
	64	5320.0	-0.547	0.122	-0.425	10.79
	100	5500.0	-0.299	0.122	-0.177	10.58
	112	5560.0	0.684	0.122	0.806	10.58
	140	5700.0	-0.515	0.122	-0.393	10.58
Mode 9	36	5180.0	2.243	0.146	2.389	10.59
	40	5200.0	2.177	0.146	2.323	10.59
	48	5240.0	2.206	0.146	2.352	10.59
	52	5260.0	-0.614	0.146	-0.468	10.79
	56	5280.0	-0.759	0.146	-0.613	10.79
	64	5320.0	-0.631	0.146	-0.485	10.79
	100	5500.0	-0.499	0.146	-0.353	10.58
	112	5560.0	0.119	0.146	0.265	10.58
	140	5700.0	-0.910	0.146	-0.764	10.58
Mode 10	38	5190.0	-1.218	0.254	-0.964	10.59
	46	5230.0	-0.955	0.254	-0.701	10.59
	54	5270.0	-3.808	0.254	-3.554	10.79
	62	5310.0	-3.478	0.254	-3.224	10.79
	102	5510.0	-3.640	0.254	-3.386	10.58
	110	5550.0	-3.112	0.254	-2.858	10.58
	134	5670.0	-3.912	0.254	-3.658	10.58
Mode 11	42	5210.0	-3.998	0.490	-3.508	10.59
	58	5290.0	-6.852	0.490	-6.362	10.79
	106	5530.0	-6.523	0.490	-6.033	10.58

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 6	149	5745	-13.125	0.122	-6.013	29.49
	157	5785	-13.380	0.122	-6.268	29.49
	165	5825	-13.660	0.122	-6.548	29.49
Mode 9	149	5745	-13.637	0.146	-6.502	29.49
	157	5785	-13.660	0.146	-6.525	29.49
	165	5825	-14.068	0.146	-6.933	29.49
Mode 10	151	5755	-16.508	0.254	-9.265	29.49
	159	5795	-17.034	0.254	-9.791	29.49
Mode 11	155	5775	-19.662	0.490	-12.182	29.49

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ration = 10*Log(500 kHz/100 kHz)

ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 6	36	5180.0	1.877	0.122	1.999	10.59
	40	5200.0	1.968	0.122	2.090	10.59
	48	5240.0	2.412	0.122	2.534	10.59
	52	5260.0	-0.656	0.122	-0.534	10.79
	56	5280.0	-0.422	0.122	-0.300	10.79
	64	5320.0	-0.318	0.122	-0.196	10.79
	100	5500.0	-0.521	0.122	-0.399	10.58
	112	5560.0	-0.740	0.122	-0.618	10.58
	140	5700.0	-0.792	0.122	-0.670	10.58
Mode 9	36	5180.0	1.761	0.146	1.907	10.59
	40	5200.0	2.091	0.146	2.237	10.59
	48	5240.0	2.228	0.146	2.374	10.59
	52	5260.0	-0.447	0.146	-0.301	10.79
	56	5280.0	-0.610	0.146	-0.464	10.79
	64	5320.0	-0.159	0.146	-0.013	10.79
	100	5500.0	-0.552	0.146	-0.406	10.58
	112	5560.0	-0.792	0.146	-0.646	10.58
	140	5700.0	-1.515	0.146	-1.369	10.58
Mode 10	38	5190.0	-1.752	0.254	-1.498	10.59
	46	5230.0	-1.580	0.254	-1.326	10.59
	54	5270.0	-4.113	0.254	-3.859	10.79
	62	5310.0	-3.365	0.254	-3.111	10.79
	102	5510.0	-4.253	0.254	-3.999	10.58
	110	5550.0	-3.931	0.254	-3.677	10.58
	134	5670.0	-4.701	0.254	-4.447	10.58
Mode 11	42	5210.0	-4.533	0.490	-4.043	10.59
	58	5290.0	-7.000	0.490	-6.510	10.79
	106	5530.0	-7.437	0.490	-6.947	10.58

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 6	149	5745	-13.059	0.122	-5.947	29.49
	157	5785	-13.026	0.122	-5.914	29.49
	165	5825	-13.630	0.122	-6.518	29.49
Mode 9	149	5745	-12.459	0.146	-5.324	29.49
	157	5785	-12.014	0.146	-4.879	29.49
	165	5825	-12.812	0.146	-5.677	29.49
Mode 10	151	5755	-15.849	0.254	-8.606	29.49
	159	5795	-16.120	0.254	-8.877	29.49
Mode 11	155	5775	-18.941	0.490	-11.461	29.49

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ration = 10*Log(500 kHz/100 kHz)

ANT-0+1				
操作模式	頻道 (CH)	頻率 (MHz)	轉換值(dBm/MHz)	限制值 (dBm/MHz)
Mode 6	36	5180.0	5.356	10.59
	40	5200.0	5.384	10.59
	48	5240.0	5.689	10.59
	52	5260.0	2.717	10.79
	56	5280.0	2.802	10.79
	64	5320.0	2.701	10.79
	100	5500.0	2.724	10.58
	112	5560.0	3.162	10.58
	140	5700.0	2.481	10.58
Mode 9	36	5180.0	5.165	10.59
	40	5200.0	5.290	10.59
	48	5240.0	5.373	10.59
	52	5260.0	2.626	10.79
	56	5280.0	2.472	10.79
	64	5320.0	2.767	10.79
	100	5500.0	2.630	10.58
	112	5560.0	2.843	10.58
	140	5700.0	1.954	10.58
Mode 10	38	5190.0	1.787	10.59
	46	5230.0	2.008	10.59
	54	5270.0	-0.694	10.79
	62	5310.0	-0.157	10.79
	102	5510.0	-0.672	10.58
	110	5550.0	-0.238	10.58
	134	5670.0	-1.025	10.58
Mode 11	42	5210.0	-0.757	10.59
	58	5290.0	-3.425	10.79
	106	5530.0	-3.456	10.58

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.


ANT-0+1				
操作模式	頻道 (CH)	頻率 (MHz)	轉換值(dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 6	149	5745	-2.970	29.49
	157	5785	-3.077	29.49
	165	5825	-3.523	29.49
Mode 9	149	5745	-2.863	29.49
	157	5785	-2.614	29.49
	165	5825	-3.249	29.49
Mode 10	151	5755	-5.912	29.49
	159	5795	-6.299	29.49
Mode 11	155	5775	-8.797	29.49

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.


Conversion ration = 10*Log(500 kHz/100 kHz)

Mode 6: IEEE 802.11a Continuous TX Mode_ANT-0


CH36

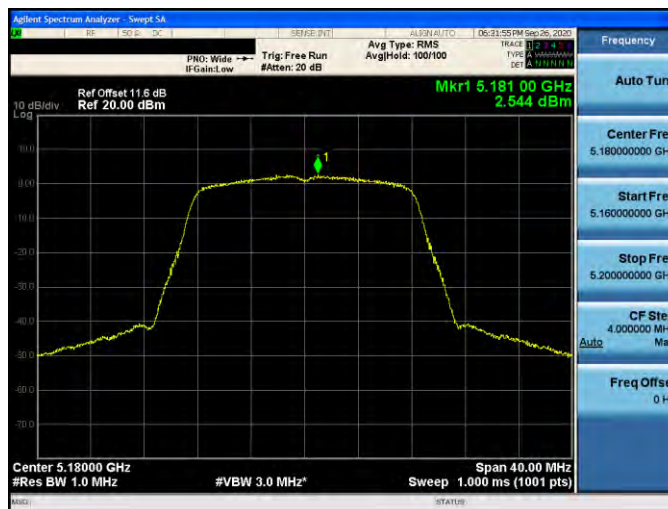

CH40

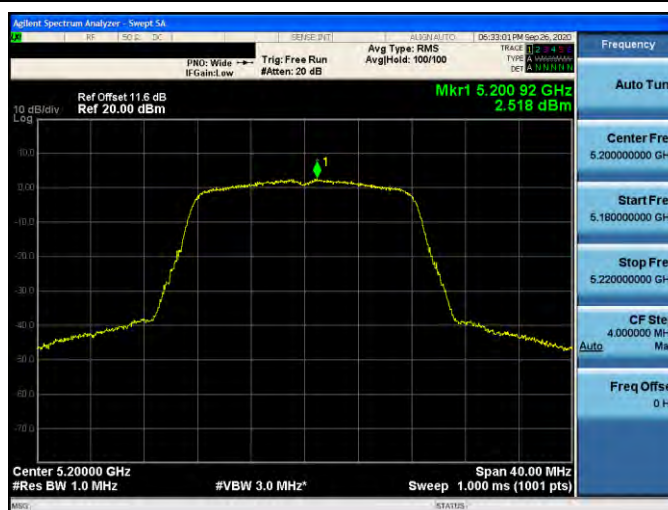

CH48

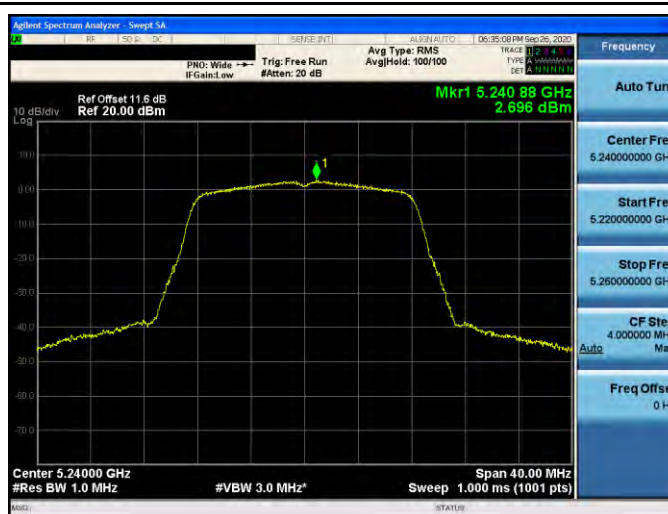


Mode 6: IEEE 802.11a Continuous TX Mode_ANT-0


CH52



CH56

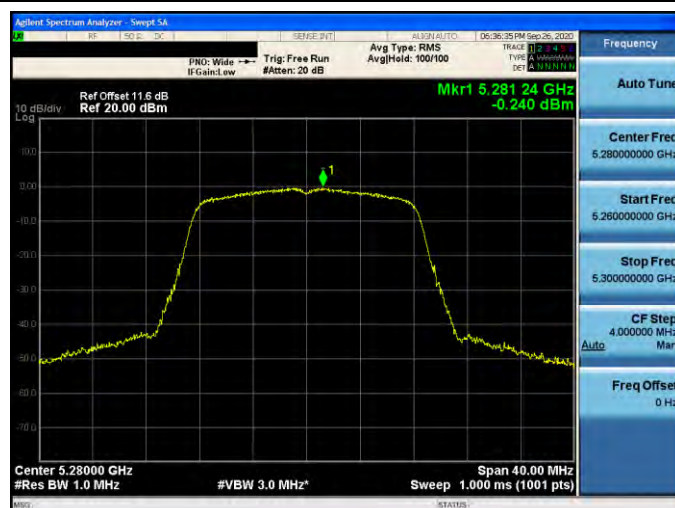


CH64

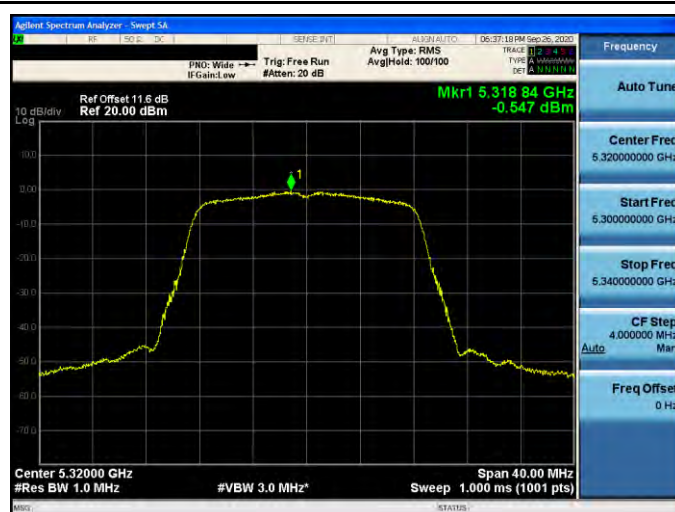


Mode 6: IEEE 802.11a Continuous TX Mode_ANT-0


CH100

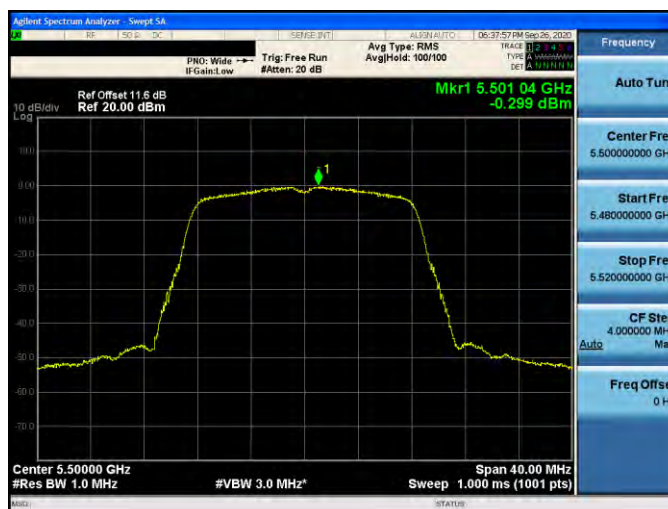

CH112

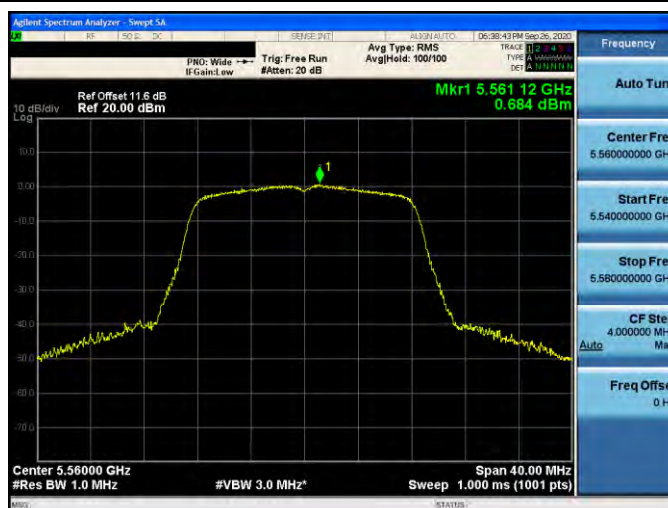


CH140

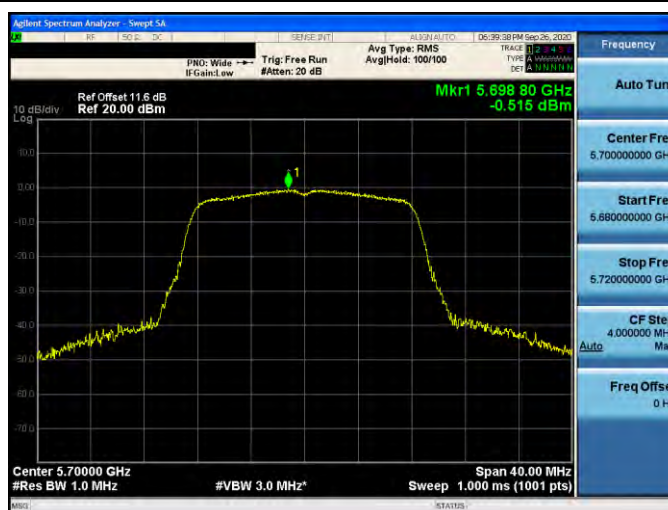


Mode 6: IEEE 802.11a Continuous TX Mode_ANT-0


CH149

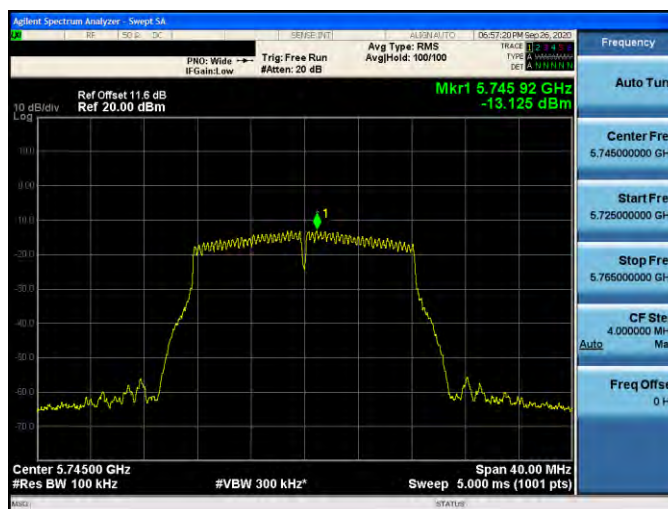


CH157

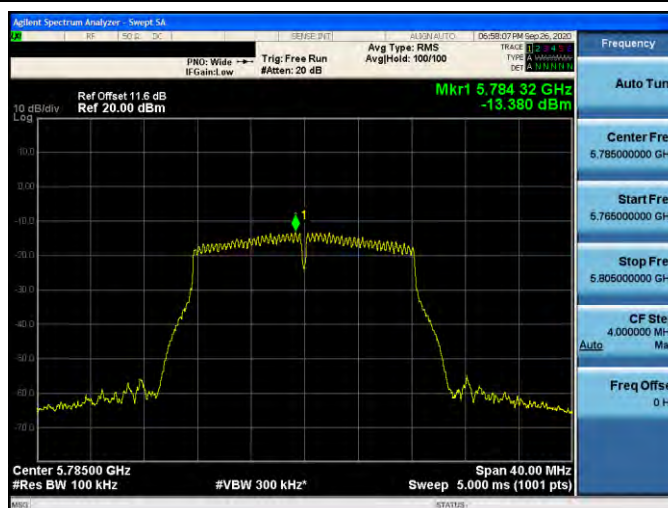


CH165

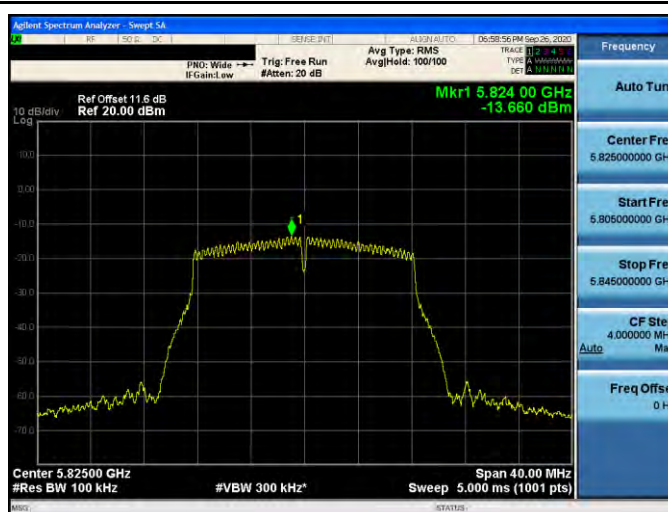

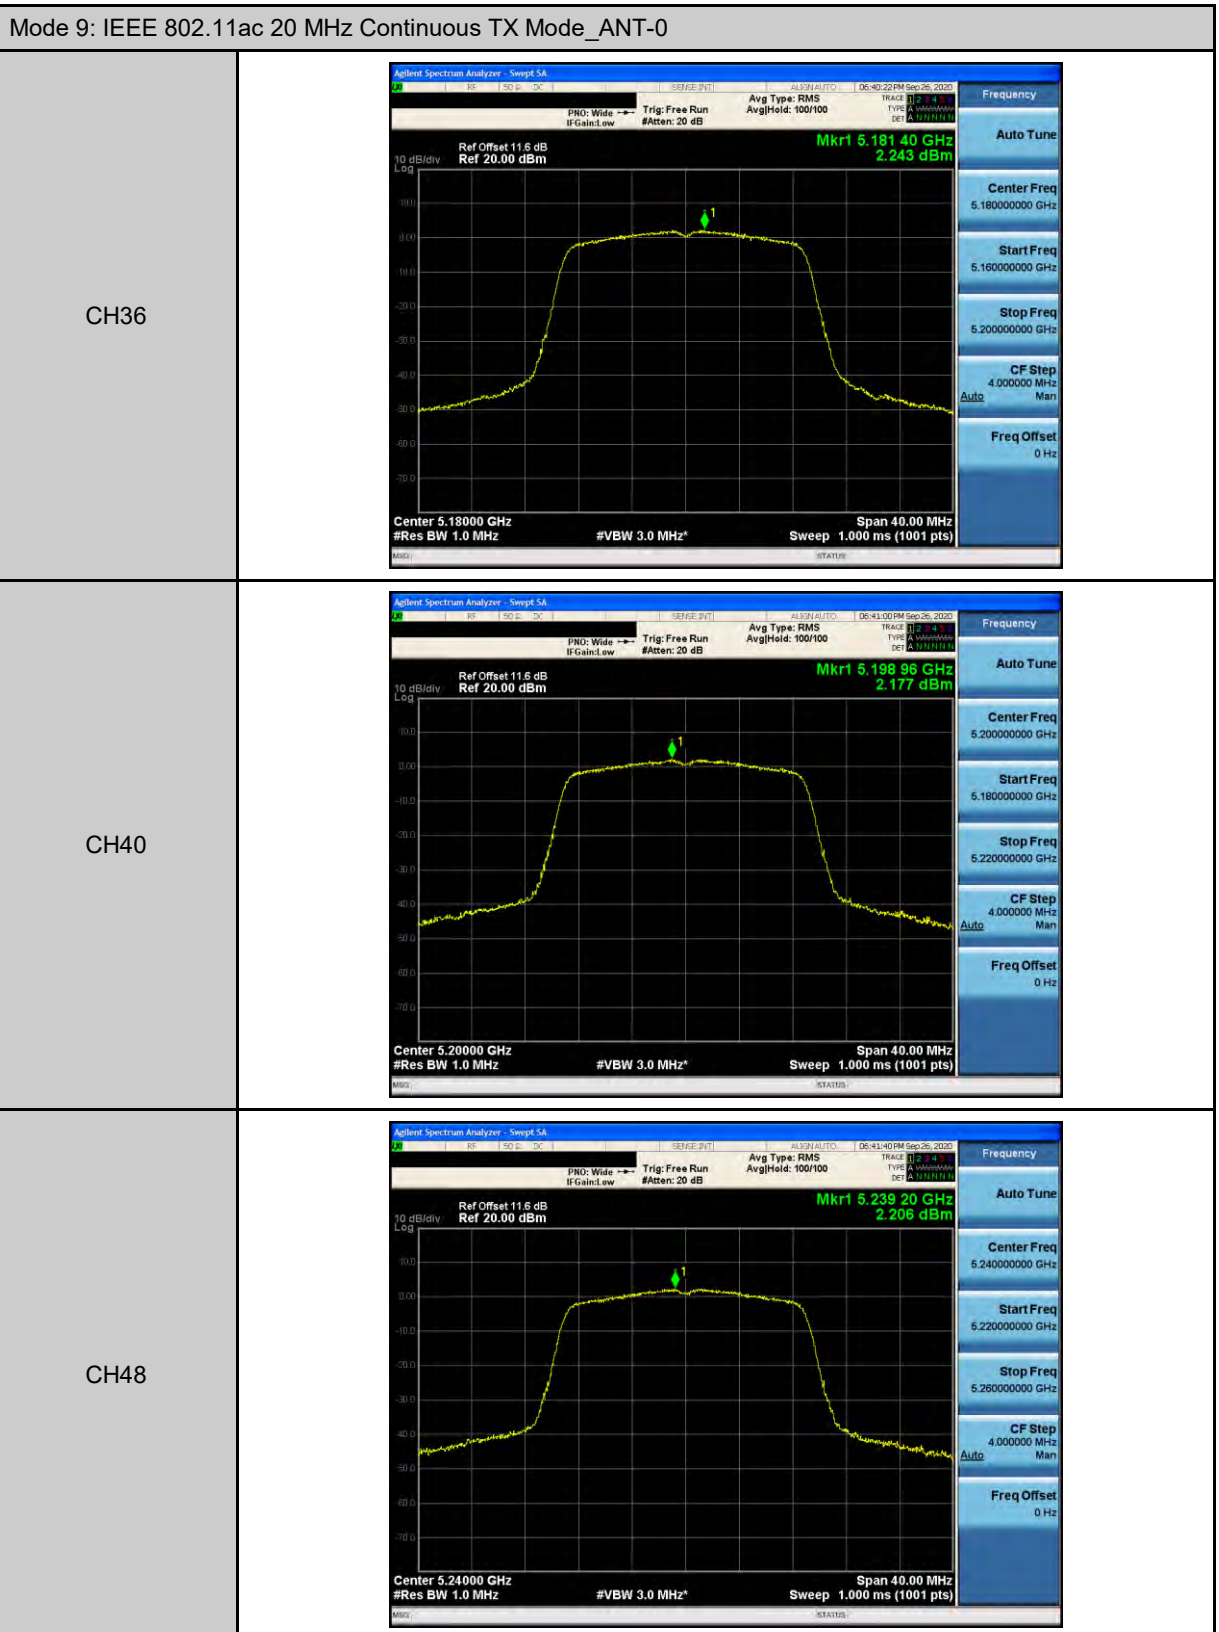


Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0


CH52

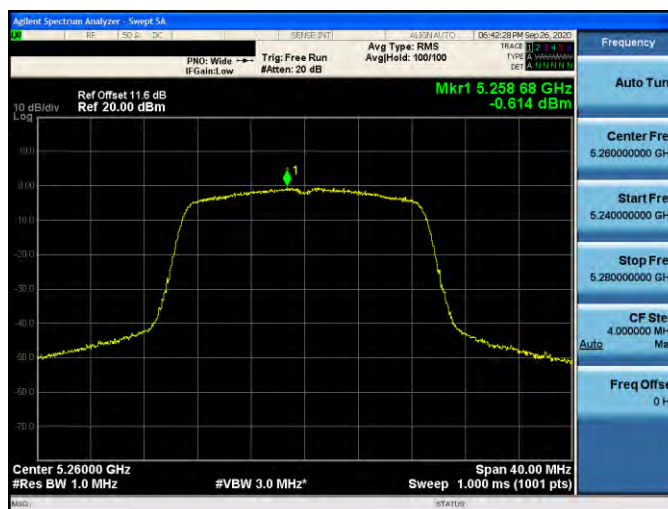

CH56

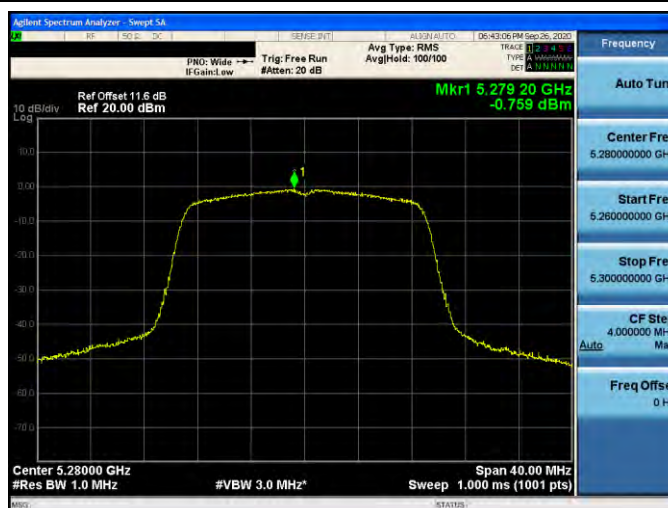


CH64

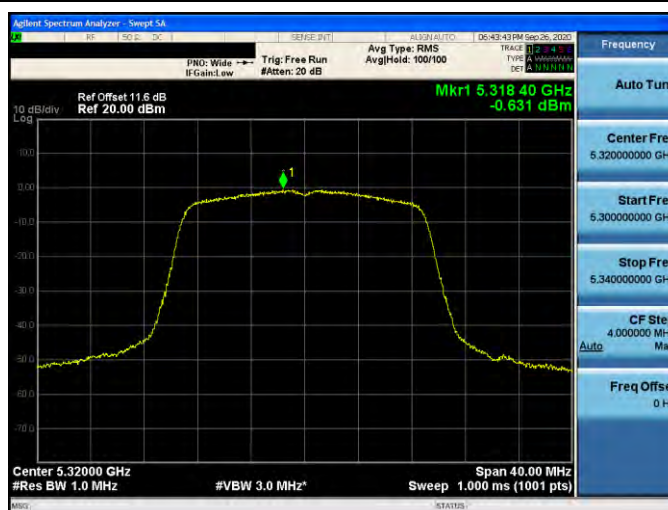


Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0


CH100

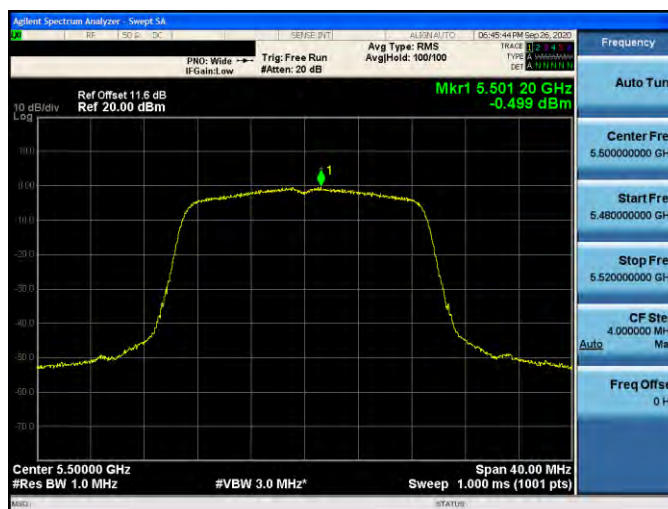

CH112

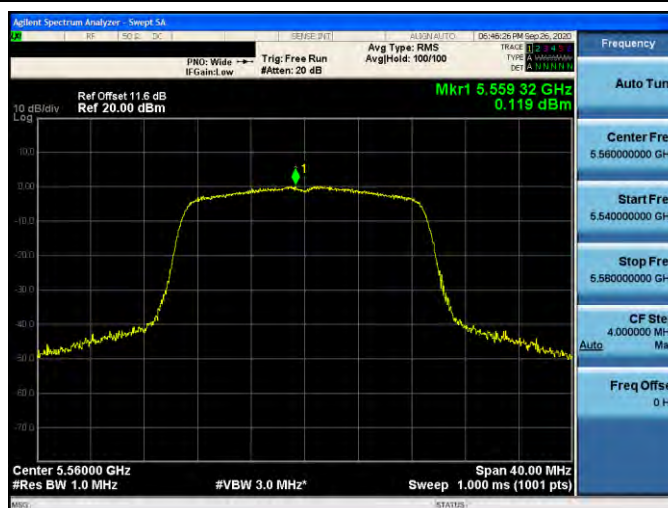


CH140

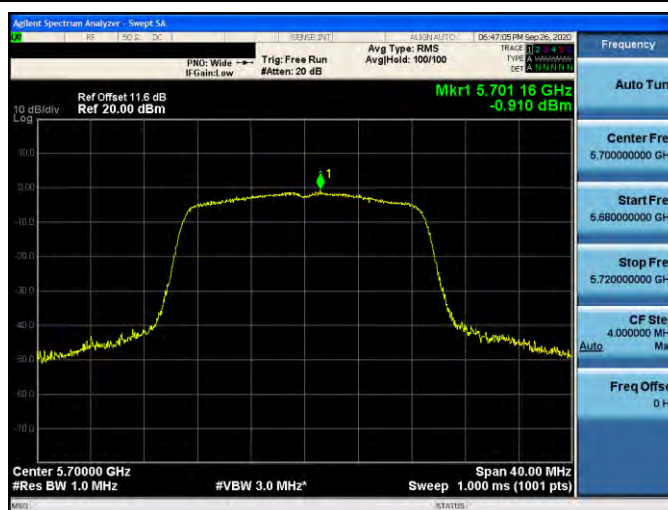


Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0


CH149

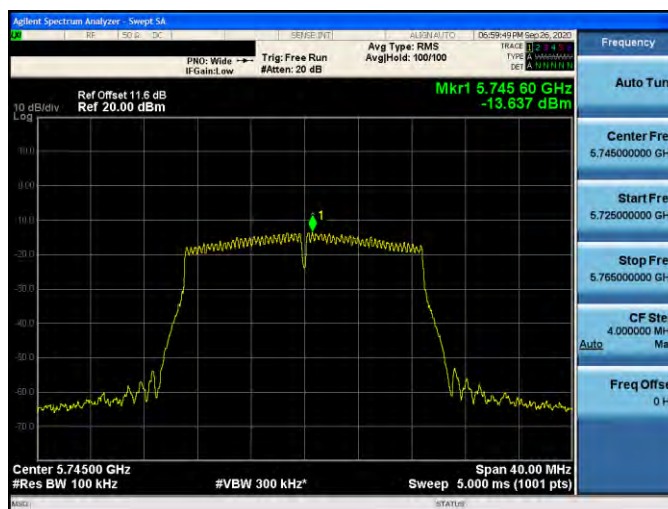

CH157

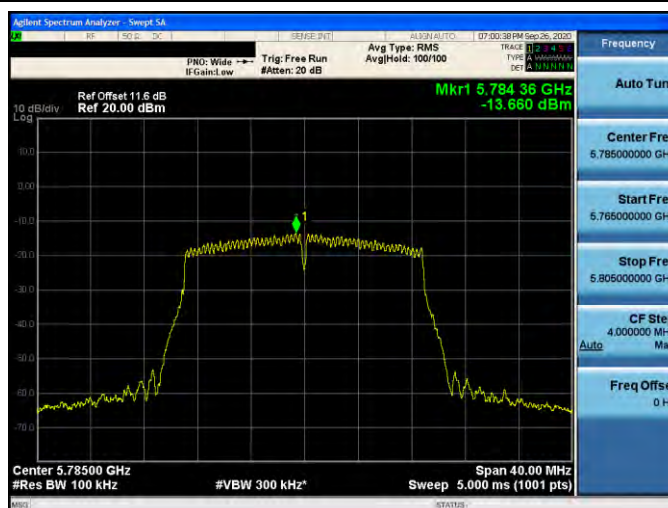


CH165

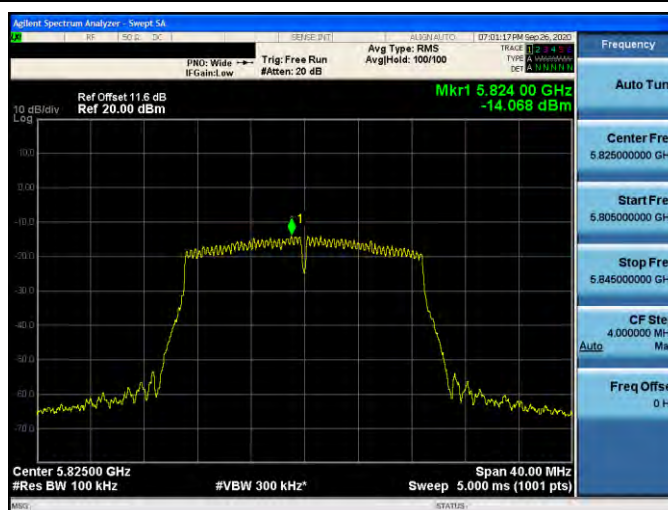


Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0


CH38

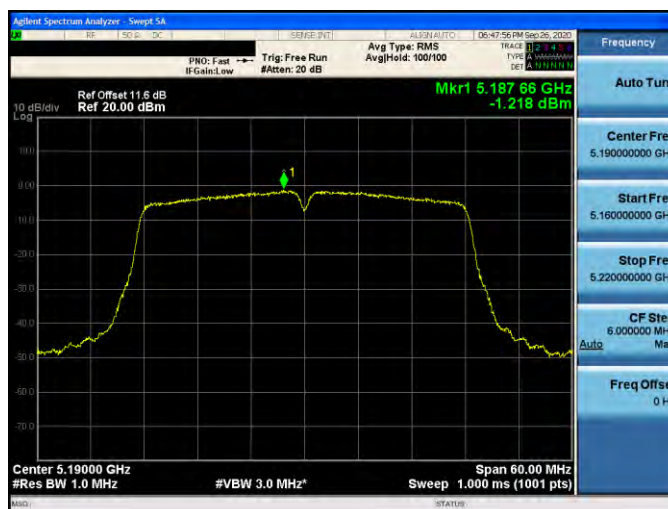

CH46

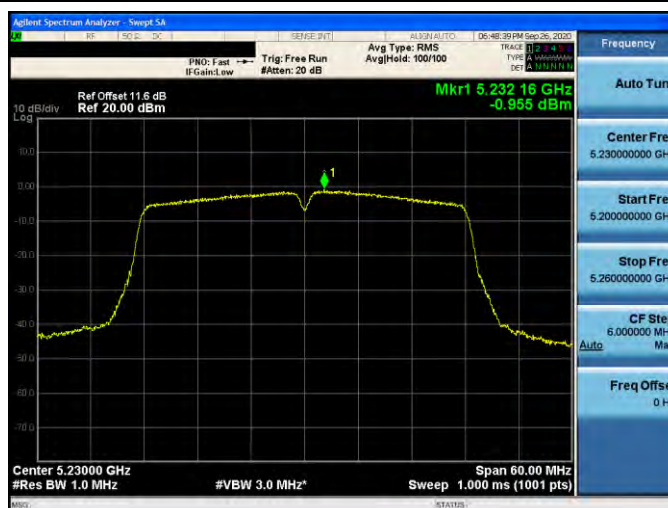


CH54

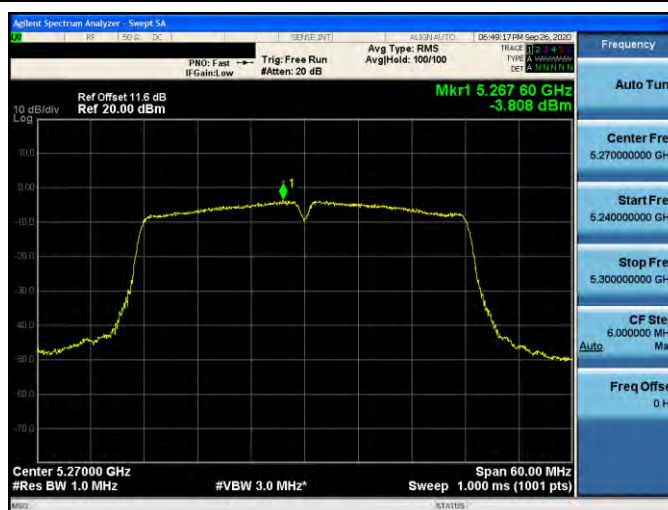


Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0


CH62

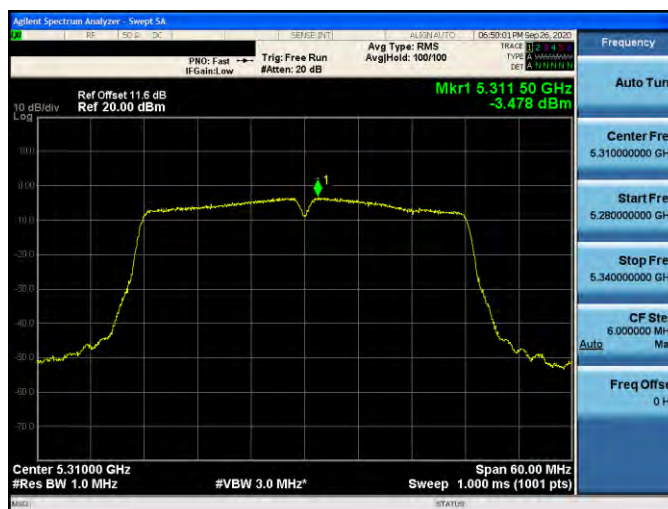

CH102

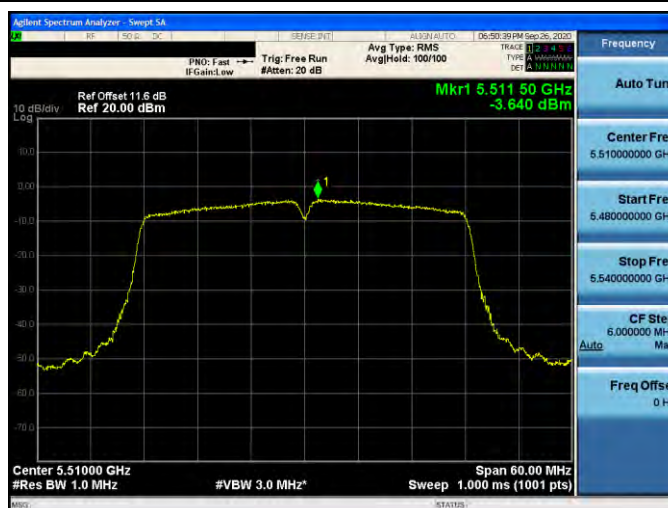


CH110

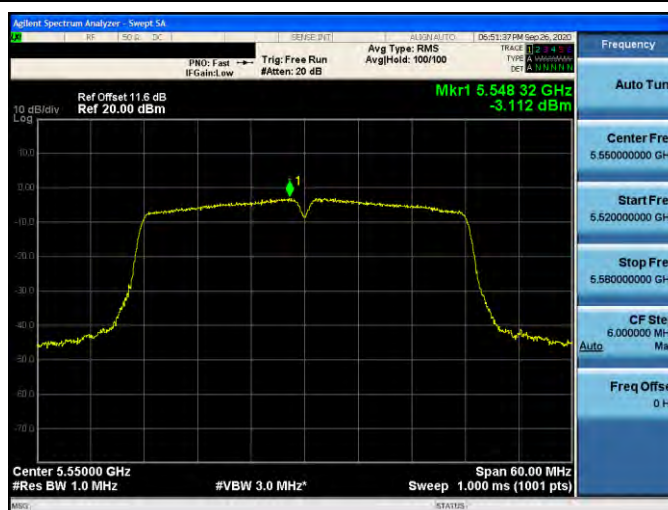

Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0


CH134

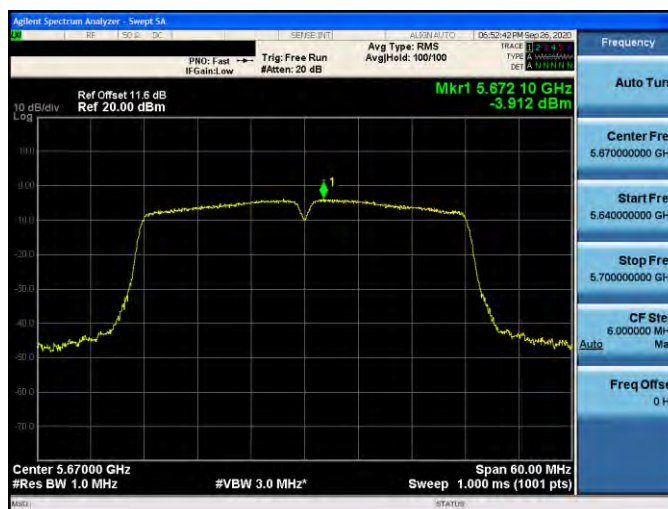

CH151



CH159

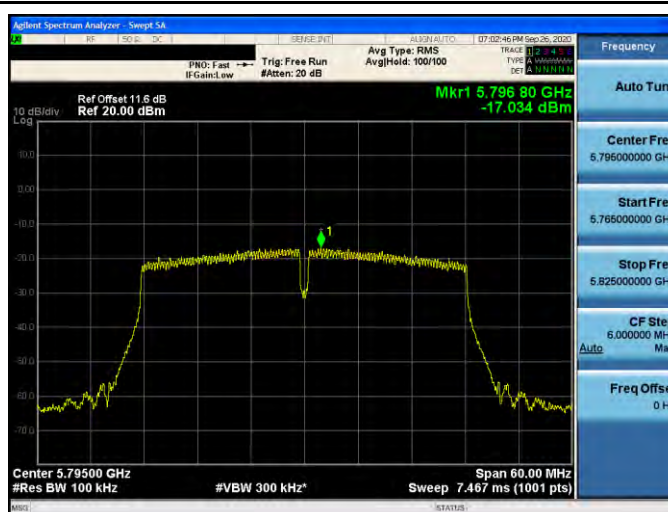

Mode 11: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-0

CH42




CH58




CH106



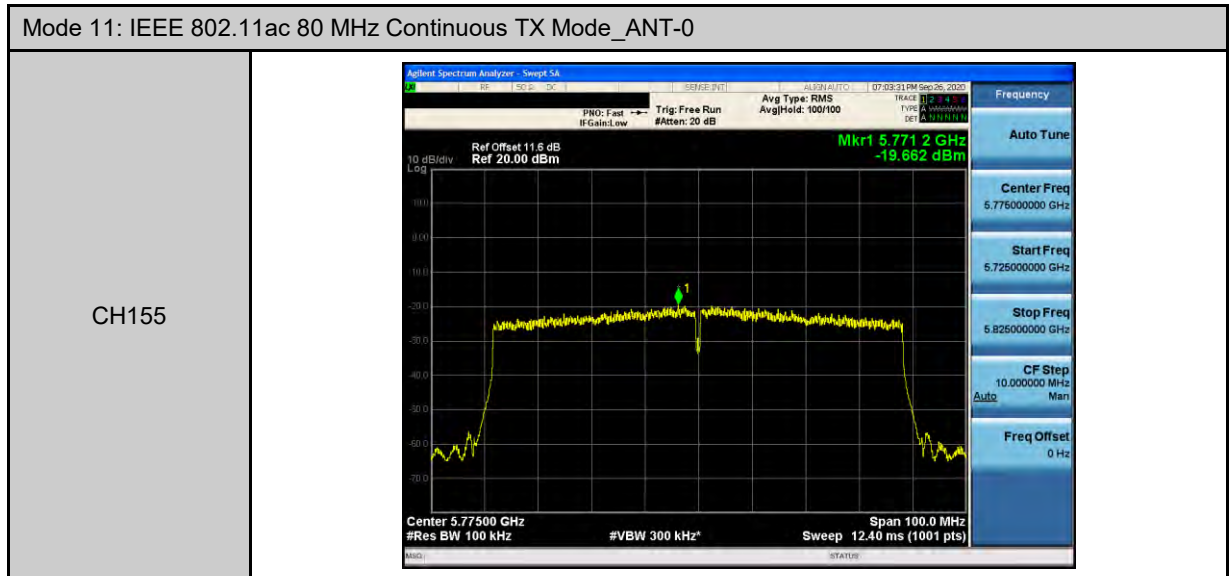


Mode 6: IEEE 802.11a Continuous TX Mode_ANT-1


CH36

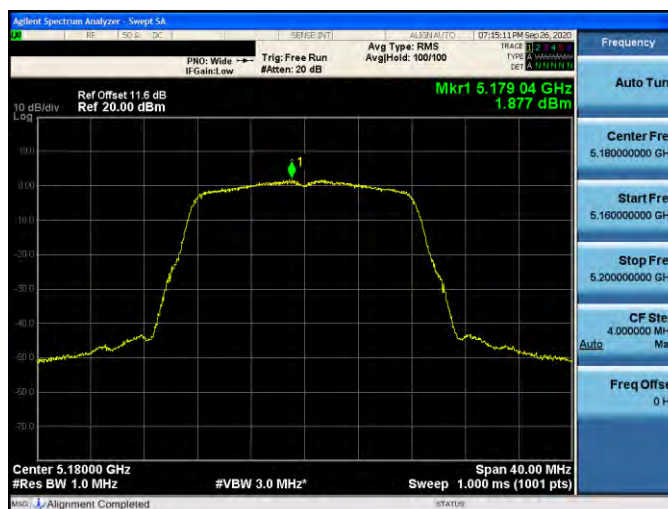

CH40

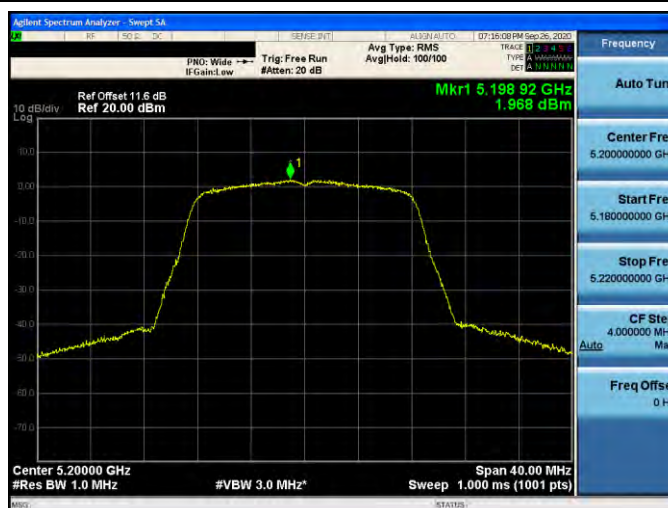


CH48

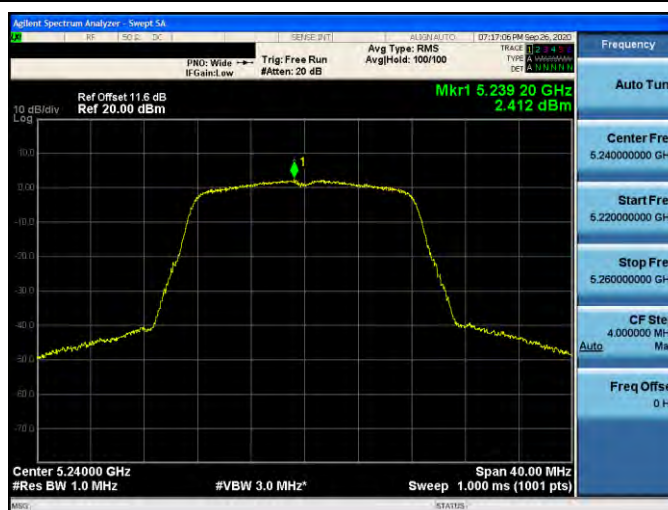


Mode 6: IEEE 802.11a Continuous TX Mode_ANT-1

CH52

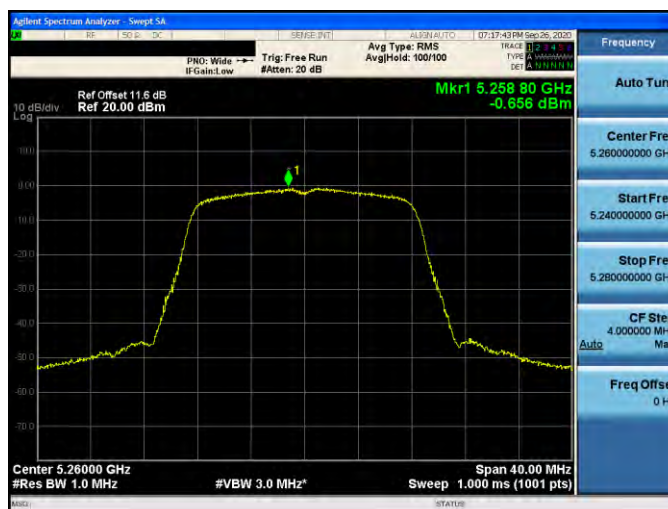

CH56

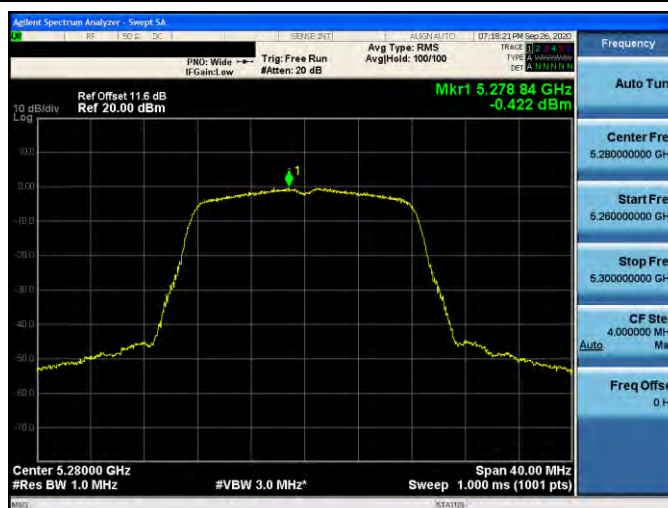

CH64

