

TEST REPORT

Report No.: 8429EU121601W

Applicant: Cyberguys, Inc

Address: 11321 White Rock Road, Rancho Cordova CA, United States 95742

Product Name: JOBSITE OPEN-EAR PRO EARBUDS WITH CHARGING CASE

Model No.: 190 2096 DW (refer to clause 2.4)

Trademark: DEWALT

Test Standard(s): MIC Notice No.88 Appendix No.43
Ordinance of MPT No.37, 1981:
Article 2 paragraph 1 item (19)

Test Result: Pass

Date of Receipt: Mar. 16, 2026

Test Date: Mar. 17, 2026 – Mar. 26, 2026


Date of Issue: Aug. 31, 2026

ISSUED BY:

SHENZHEN EU TESTING LABORATORY LIMITED



Prepared by:



Mikey Zhu/ Engineer

Reviewed and Approved by:



Sally Zhang/ Manager

SHENZHEN EU TESTING LABORATORY LIMITED

Address: 101, Building B1, Fuqiao Fourth Area, Qiaotou Community,
Fuhai Subdistrict, Baoan District, Shenzhen, Guangdong, China

Website: www.eu-test.com

Tel: (86)-755-2357-9714 Email: Service@eu-test.com

Revision Record

Report Version	Issued Date	Description	Status
V0	Aug. 31, 2026	Original	Valid

Table of Contents

1	COVER PAGE.....	1
2	GENERAL INFORMATION	5
2.1	APPLICANT INFORMATION.....	5
2.2	MANUFACTURER INFORMATION.....	5
2.3	FACTORY INFORMATION.....	5
2.4	GENERAL DESCRIPTION OF E.U.T.....	5
2.5	TECHNICAL INFORMATION OF E.U.T.....	6
3	TEST SUMMARY.....	7
3.1	TEST STANDARD.....	7
3.2	TEST VERDICT.....	7
3.3	TEST LABORATORY.....	7
4	TEST CONFIGURATION.....	8
4.1	TEST ENVIRONMENT.....	8
4.2	TEST EQUIPMENT.....	9
4.3	DESCRIPTION OF SUPPORT UNIT.....	9
4.4	MEASUREMENT UNCERTAINTY.....	10
5	TEST ITEMS.....	11
5.1	FREQUENCY TOLERANCE TEST.....	11
5.1.1	Test Requirement.....	11
5.1.2	Test Setup Diagram.....	11
5.1.3	Test Procedure.....	11
5.1.4	Test Deviation.....	11
5.1.5	EUT Operation during Test.....	11
5.1.6	Test Data.....	11
5.2	OCCUPIED BANDWIDTH AND SPREAD-SPECTRUM BANDWIDTH / FACTOR.....	12
5.2.1	Test Requirement.....	12
5.2.2	Test Setup Diagram.....	12
5.2.3	Test Procedure.....	12
5.2.4	Test Deviation.....	12
5.2.5	EUT Operation during Test.....	12
5.2.6	Test Data.....	12
5.3	ANTENNA POWER TEST.....	13
5.3.1	Test Requirement.....	13
5.3.2	Test Setup Diagram.....	13
5.3.3	Test Procedure.....	13
5.3.4	Test Deviation.....	13
5.3.5	EUT Operation during Test.....	13
5.3.6	Test Data.....	13
5.4	DWELL TIME.....	14
5.4.1	Test Requirement.....	14
5.4.2	Test Setup Diagram.....	14
5.4.3	Test Procedure.....	14
5.4.4	Test Deviation.....	14
5.4.5	EUT Operation during Test.....	14
5.4.6	Test Data.....	14
5.5	SPURIOUS EMISSIONS INTENSITY TEST.....	15
5.5.1	Test Requirement.....	15
5.5.2	Test Setup Diagram.....	15
5.5.3	Test Procedure.....	15
5.5.4	Test Deviation.....	15

5.5.5	EUT Operation during Test	15
5.5.6	Test Data	15
5.6	SECONDARY RADIATED EMISSIONS TEST	16
5.6.1	Test Requirement.....	16
5.6.2	Test Setup Diagram	16
5.6.3	Test Procedure.....	16
5.6.4	Test Deviation	16
5.6.5	EUT Operation during Test	16
5.6.6	Test Data	16
5.7	INTERFERENCE PREVENTION FUNCTION	17
5.7.1	Test Requirement.....	17
5.7.2	Test Setup Diagram	17
5.7.3	Test Procedure.....	17
5.7.4	Test Deviation	17
5.7.5	EUT Operation during Test	17
5.7.6	Test Data	17
5.8	TRANSMISSION RADIATION ANGLE WIDTH (3dB BEAMWIDTH) MEASUREMENT	18
5.8.1	Test Requirement.....	18
5.8.2	Test Setup Diagram	18
5.8.3	Test Procedure.....	18
5.8.4	Test Deviation	18
5.8.5	EUT Operation during Test	18
5.8.6	Test Data	18
5.9	CONSTRUCTION PROTECTION CONFIRMATION METHOD	19
ANNEX A	TEST SETUP PHOTOS	20
ANNEX B	EXTERNAL PHOTOS	20
ANNEX C	INTERNAL PHOTOS	20
ANNEX D	TEST DATA	21

2 General Information

2.1 Applicant Information

Applicant	Cyberguys, Inc
Address	11321 White Rock Road, Rancho Cordova CA, United States 95742

2.2 Manufacturer Information

Manufacturer	E-fillite Incorporated
Address	11321 White Rock Road, Rancho Cordova CA, United States 95742

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description of E.U.T.

Product Name	JOBSITE OPEN-EAR PRO EARBUDS WITH CHARGING CASE
Model No. Under Test	190 2096 DW
List Model No.	DXMAEF0013JP, 190 2096 DWJ, 190 2096 DW J, DXMAEF0081JP, 190 2096 DWJ BA, 190 2096 DW J BA, DXMA1902096
Description of Model differentiation	All models are same with electrical parameters and internal circuit structure, but only differ in appearance color and model name. (this information provided by the customer)
Rating(s)	Input: 5V --- 0.25A Battery Capacity (for charging case): 3.7VDC, 850mAh, 3.145Wh Battery Capacity (for earbud): 3.7VDC, 80mAh, 0.296Wh
Product Type	☐ Mobile ☒ Portable ☐ Fix Location
Test Sample No.	8429EU121601W-1/2(Normal), 8429EU121601W-2/2(Engineering)
Hardware Version	V1.0
Software Version	0.3.1
Remark	For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.5 Technical Information of E.U.T.

Network and Wireless Connectivity	Bluetooth (BDR+EDR)
-----------------------------------	---------------------

The requirement for the following technical information of the EUT was tested in this report:

Technology	Bluetooth
Operation Mode	☒ BDR ☒ EDR ☐ BLE
Modulation Type	GFSK, $\pi/4$ DQPSK, 8DPSK
Operating Frequency	2402-2480MHz
Transfer Rate	DH5: 1 Mbps 2DH5: 2 Mbps 3DH5: 3 Mbps
Number of Channel	79
Antenna Type	Ceramic Antenna
Antenna Gain(Peak)	Left Ear & Right Ear: 2.50 dBi
Antenna Impedance	50 Ω
Rated output Power	Left Ear: 0.100 mW/MHz Right Ear: 0.100 mW/MHz
Remark	The above information are declared by the applicant, EU-LAB is not responsible for the information accuracy provided by the applicant.

All channels were listed on the following table:

Channel Number	Freq. (MHz)	Channel Number	Freq. (MHz)	Channel Number	Freq. (MHz)	Channel Number	Freq. (MHz)
00	2402	21	2423	42	2444	63	2465
01	2403	22	2424	43	2445	64	2466
02	2404	23	2425	44	2446	65	2467
03	2405	24	2426	45	2447	66	2468
04	2406	25	2427	46	2448	67	2469
05	2407	26	2428	47	2449	68	2470
06	2408	27	2429	48	2450	69	2471
07	2409	28	2430	49	2451	70	2472
08	2410	29	2431	50	2452	71	2473
09	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460	-	-
17	2419	38	2440	59	2461	-	-
18	2420	39	2441	60	2462	-	-
19	2421	40	2442	61	2463	-	-
20	2422	41	2443	62	2464	-	-

3 Test Summary

3.1 Test Standard

The tests were performed according to following standards:

No.	Identity	Document Title
1	MIC Notice No.88 Appendix No.43 Ordinance of MPT No.37, 1981: Article 2 paragraph 1 item (19)	Low power data communications system in the 2.4GHz band

Remark:

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product maybe which result in lowering the emission should be checked to ensure compliance has been maintained.

3.2 Test Verdict

No.	Description	Test Mode	Data Rate (Mbps)	Verdict	Remark
1	Frequency Tolerance	GFSK, $\pi/4$ -DQPSK, 8DPSK	1/2/3	Pass	--
2	Occupied Bandwidth and Spread-spectrum Bandwidth / Factor	GFSK, $\pi/4$ -DQPSK, 8DPSK	1/2/3	Pass	--
3	Antenna power	GFSK, $\pi/4$ -DQPSK, 8DPSK	1/2/3	Pass	--
4	EIRP Antenna Power	GFSK, $\pi/4$ -DQPSK, 8DPSK	1/2/3	N/A	Note ²
5	Dwell Time	GFSK, $\pi/4$ -DQPSK, 8DPSK	1/2/3	Pass	--
6	Spurious Emission Intensity	GFSK, $\pi/4$ -DQPSK, 8DPSK	1/2/3	Pass	--
7	Secondary Radiated Emission	GFSK, $\pi/4$ -DQPSK, 8DPSK	1/2/3	Pass	--
8	Spurious Emissions	GFSK, $\pi/4$ -DQPSK, 8DPSK	1/2/3	Pass	--
9	Interference prevention function	GFSK, $\pi/4$ -DQPSK, 8DPSK	1/2/3	Pass	--
10	Transmission Radiated Angle Width (3dB Beam Bandwidth)	GFSK, $\pi/4$ -DQPSK, 8DPSK	1/2/3	N/A	Note ³
11	Construction Protection Confirmation	GFSK, $\pi/4$ -DQPSK, 8DPSK	1/2/3	Compliance	--

Note 1: The tests were performed according to the method of measurements prescribed in MIC Notice No.88 Appendix No.43.

Note 2: Application to transmitting devices which E.I.R.P. is less than (2.14dBi+antenna power limit) and the shortage of E.I.R.P. is compensated by the antenna power.

Note 3: It is unnecessary to testing, when a E.I.R.P. is less than the variable E.I.R.P. limit of minimum (DSSS: 12.14dBm/MHz) or less, FHSS (2427-2470.75 MHz): 6.91dBm/MHz or less, etc.)

3.3 Test Laboratory

Test Laboratory	Shenzhen EU Testing Laboratory Limited
Address	101, Building B1, Fuqiao Fourth Area, Qiaotou Community, Fuhai Subdistrict, Baoan District, Shenzhen, Guangdong, China

4 Test Configuration

4.1 Test Environment

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	54 %	
Atmospheric Pressure	102 kPa	
Temperature	NT (Normal Temperature)	22°C
Working Voltage of the EUT	NV (Normal Voltage)	3.70VDC
	LV (Low Voltage)	3.33VDC
	HV (High Voltage)	4.07VDC

Power Supply Voltage Fluctuation Test

Voltage Fluctuation Test	Normal Voltage	High Voltage +10% of Normal Voltage	Low Voltage -10% of Normal Voltage
Input To EUT	3.70VDC	4.07VDC	3.33VDC
Output To RF Module	3.3VDC	3.3VDC	3.3VDC
Voltage Variation (%)	--	0.00%	0.00%

Note:

Voltage Variation (%)=(Output high or Low Voltage - Output Normal Voltage)/ Output Normal Voltage* 100%
For extreme voltage test, we have tested the relationship between the external power supply and RF IC power supply. Base on the test results, only the normal voltage was selected to perform all items.

4.2 Test Equipment

Radiated Emission and RF Test					
Equipment	Manufacturer	Model No	Serial No	Cal Date	Cal Due Date
EMI Test Receiver	ROHDE & SCHWARZ	ESPI	EE-006	2026/01/07	2027/01/06
Bilog Broadband Antenna	SCHWARZBECK	VULB 9163	EE-007	2026/01/13	2029/01/12
Double Ridged Horn Antenna	A-INFOMW	LB-10180-NF	EE-008	2026/01/11	2029/01/10
Pre-amplifier	Agilent	8447D	EE-009	2026/01/07	2027/01/06
Pre-amplifier	Agilent	8449B	EE-010	2026/01/07	2027/01/06
MXA Signal Analyzer	Agilent	N9020A	EE-011	2026/01/07	2027/01/06
MXG RF Vector Signal Generator	Agilent	N5182A	EE-012	2026/01/07	2027/01/06
Test Software	Farad	EZ-EMC	EE-015	N.C.R	N.C.R
MIMO Power Measurement Module	TSTPASS	TSPS 2023R	EE-016	2026/01/07	2027/01/06
RF Test Software	TSTPASS	TS32893 V2.0	EE-017	N.C.R	N.C.R
Wideband Radio Communication Tester	ROHDE & SCHWARZ	CMW500	EE-402	2026/02/13	2027/02/12
Loop Antenna	TESEQ	HLA6121	EE-403	2026/02/13	2027/02/12
MXG RF Analog Signal Generator	Agilent	N5181A	EE-406	2026/02/13	2027/02/12
Constant Temperature Humidity Chamber	Guangxin	GXP-401	ES-002	2026/02/13	2027/02/12
Power Sensor	ROHDE&SCHWA RZN	NRP18S	ES-052	2026/02/13	2027/02/12
DC Power Source	QJE	QJ3020E	ES-037	2025/07/29	2026/07/28
Note ¹ : Calibration Company: Shenzhen Academy Of Metrology& Quality inspection.					
Note ² : Calibration method: Calibration conducted in foreign countries, which is equivalent to calibration conducted by the NICT or a designated calibration agency under Article 102-18-1 and Article 24-2, Paragraph 4 of the Radio Act.					

4.3 Description of Support Unit

No.	Title	Manufacturer	Model No.	Serial No.
1	--	--	--	--

4.4 Measurement Uncertainty

Parameters	Uncertainty
Frequency Error / 99% Bandwidth	$(3.2 \times f \times 10^{-6})$ Hz
Antenna Power	1.82 dB
Dwell Time	1.8 %
TX-RX Spurious Emissions	1.84 dB
Transmission Antenna Gain	5.36 dB
Temperature	0.82 °C
Humidity	4.1%
DC / AC Power Source	0.04%
Noet: "f" is the nominal signal frequency in Hz.	

Note: This uncertainty represents as expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

5 Test Items

5.1 Frequency Tolerance Test

5.1.1 Test Requirement

Item	Limits
Frequency Tolerance	$\leq \pm 50$ ppm

5.1.2 Test Setup Diagram



5.1.3 Test Procedure

- Test Frequency= test channel
 RBW=VBW=100KHz
 Span=2MHz
 Sweep time=Auto
 Detector mode=Positive peak
 Indication mode=Max hold
- EUT have transmitted modulation signal and fixed channelize. fL, fH are using the mark cursor to mark the frequency values, fc is declaring of channel frequency. The calculated frequency formula is: $f = (fL + fH) / 2$;
 Then the frequency error formula is $(fc - f) / fc \times 106 \text{ ppm}$ and the limit is less than ± 50 ppm.

5.1.4 Test Deviation

There is no deviation with the original standard.

5.1.5 EUT Operation during Test

The EUT was programmed to be in continuous transmit, carrier mode.

5.1.6 Test Data

PASS.

Please refer to Annex D for details.

5.2 Occupied Bandwidth and Spread-spectrum Bandwidth / Factor

5.2.1 Test Requirement

Item	Limits
Occupied Band Width	FHSS $\leq$ 83.5MHz; OFDM $\leq$ 40MHz, DSSS $\leq$ 26MHz; Others $\leq$ 26MHz

5.2.2 Test Setup Diagram



5.2.3 Test Procedure

- Set the spectrum analyzer as follows:
Center frequency: Test frequency
Span: Approximately 2 to 3.5 times nominal bandwidth
Resolution bandwidth: Within 3% of the technical standard
Video bandwidth: equivalent to resolvable bandwidth
Sweep time: auto
Sweep mode: Continuous sweep
Detection: Positive peak
Trace mode: Maximum hold
- After repeating sweeps until the display shows steady data, store the values at all data points into the computer array variables.
- Convert the dB values at all data points to antilogarithm on the power dimension.
- Obtain sum total of the power at all data points, and store it as "total power".
- Accumulate the power at each data point sequentially upward from the lowest frequency and obtain the limit data point where the accumulated power becomes 0.5% (5% for spreading bandwidth) of the "total power". Then convert the limit data point into frequency and store it as "lower limit frequency".
- Accumulate the power at each data point sequentially downward from the highest frequency and obtain the limit data point where the accumulated power becomes 0.5% (5% for spreading bandwidth) of the "total power". Then convert the limit data point into frequency and store it as "upper limit frequency".
- Spread Spectrum Factor = Spread Spectrum Bandwidth / modulation rate of EUT.

5.2.4 Test Deviation

There is no deviation with the original standard.

5.2.5 EUT Operation during Test

The EUT was programmed to be in continuous transmit, channel-hopping mode.

5.2.6 Test Data

PASS.

Please refer to Annex D for details.

5.3 Antenna Power Test

5.3.1 Test Requirement

Item	Limits
Antenna Power Density	a) FH, FH+DS, or FH+OFDM form 2427 - 2470.75 MHz: ≤ 3 mW/MHz b) DS but other than a) from 2400~2483.5 MHz: ≤ 10 mW/MHz c) OFDM, but other than a): For OCB of 26MHz or less: ≤ 10 mW/MHz For OCB of over 26 MHz to 40 MHz: ≤ 5 mW/MHz d) Other than a), b) and c): ≤ 10 mW
Antenna Power Error	+20% (Base on manufacturer declare antenna power density)
EIRP Power	6.91 dBm/MHz

5.3.2 Test Setup Diagram



5.3.3 Test Procedure

1. Measure the total power by the Power Meter in a state of hopping mode.
2. Calculate the mean power per 1MHz by dividing the reading level by spread bandwidth.
 Output power Density (mW/MHz) = Total power (mW) / spread bandwidth (MHz)

5.3.4 Test Deviation

There is no deviation with the original standard.

5.3.5 EUT Operation during Test

The EUT was programmed to be in continuous transmit, channel-hopping mode.

5.3.6 Test Data

PASS.

Please refer to Annex D for details.

5.4 Dwell Time

5.4.1 Test Requirement

Item	Limits
Dwell Time	For the radio equipment that uses the frequency hopping method excluding a combination of the spread spectrum method and OFDM, the total sum of the frequency retention time in any frequency within the time obtained by multiplying the diffusion rate by 0.4 second shall be 0.4 second or shorter

5.4.2 Test Setup Diagram



5.4.3 Test Procedure

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	0 MHz
RBW&VBW	1 MHz
	1 MHz
Detector	Peak
Trace	Max Hold
Sweep	Continuous

- The transmitter output (antenna port) was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- Use a video trigger with the trigger level set to enable triggering only on full pulses.
- Sweep Time is more than once pulse time.
- Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- Measure the maximum time duration of one single pulse
- Set the EUT for DH5, DH3 and DH1 packet transmitting.
- Measure the maximum time duration of one single pulse
- Dwell time = [spreading rate/79 x duty-cycle x 0.4 seconds. (to be determined for each mode DH1, DH3, DH5)]

5.4.4 Test Deviation

There is no deviation with the original standard.

5.4.5 EUT Operation during Test

The EUT was programmed to be in continuous transmit, channel-hopping mode.

5.4.6 Test Data

PASS.

Please refer to Annex D for details.

5.5 Spurious Emissions Intensity Test

5.5.1 Test Requirement

Item	Limits
TX Spurious Emission	$\leq 2.5\mu\text{W}$ ($2387\text{MHz} > f$; $2496.5\text{MHz} < f$)
	$\leq 25\mu\text{W}$ ($2387\text{MHz} \leq f < 2400\text{MHz}$) and ($2483.5\text{MHz} < f \leq 2496.5\text{MHz}$)

5.5.2 Test Setup Diagram



5.5.3 Test Procedure

Spectrum Parameter	Setting
Attenuation	Auto
RBW&VBW	30-1000 MHz: 1 MHz/1 MHz
	Above 1GHz: 1 MHz/1 MHz
Detector	Peak
Trace	Max Hold
Sweep	Auto

1. The EUT is placed in transmit mode at maximum power/modulation at a fixed channel.
2. Setting of SA is following as: RBW/VBW = 1MHz; / AT: 10dB / Ref: 0dBm / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold
3. Setting of SA is following as 30 MHz and stop frequency 2387 MHz Then to mark peak reading value + cable loss shall be less than 2.5 μW
4. SA adjusted to start frequency 2387 MHz and stop frequency 2400 MHz. Then to mark peak reading value + cable loss shall be less than 25 μW .
5. SA adjusted to start frequency 2483.5 MHz and stop frequency 2496.5 MHz Then to mark peak reading value + cable loss shall be less than 25 μW
6. SA adjusted to start frequency 2496.5 MHz and stop frequency 12500 MHz Then to mark peak reading value + cable loss shall be less than 2.5 μW
7. If the Result_Value is over the requirement, take total sum of 1MHz band centered at the spur frequency like ACLP measurement as Result_Value.

5.5.4 Test Deviation

There is no deviation with the original standard.

5.5.5 EUT Operation during Test

The EUT was programmed to be in continuous transmit, channel-hopping mode.

5.5.6 Test Data

PASS.

Please refer to Annex D for details.

5.6 Secondary Radiated Emissions Test

5.6.1 Test Requirement

Item	Limits
RX Spurious Emission	$\leq 4\text{nW}$ ($f < 1\text{GHz}$)
	$\leq 20\text{nW}$ ($1\text{GHz} \leq f$)

5.6.2 Test Setup Diagram



5.6.3 Test Procedure

Spectrum Parameter	Setting
Attenuation	Auto
RBW&VBW	30-1000 MHz: 100KHz/100KHz
	Above 1GHz: 1 MHz/1 MHz
Detector	Peak
Trace	Max Hold
Sweep	Auto

1. The EUT is placed in Rx mode and set to a fixed channel.
2. Setting of SA is following as RB / VB: 100 kHz (below 1GHz emissions) / 1 MHz (above 1GHz emissions) / AT:10 dB / Ref: 0dBm / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold
3. SA set RB: 100 kHz and VB: 100 kHz. Then adjust to start frequency 30 MHz and stop frequency 1000 MHz. Search to mark peak reading value + cable loss shall be less than 4 nW
4. SA set RB: 1 MHz and VB: 1 MHz. Then adjust to start frequency 1000 MHz and stop frequency 12500 MHz. Search to mark peak reading value + cable loss shall be less than 20 nW
5. If power level of lower emissions are more than 1/10 of limit (0.4nW for $f < 1\text{GHz}$, 2 nW for $f \geq 1\text{GHz}$), all those are to be indicated in the 2nd and 3rd lines. If others are 1/10 or less more of the limit, no necessary to be indicated

5.6.4 Test Deviation

There is no deviation with the original standard.

5.6.5 EUT Operation during Test

The EUT was programmed to be in continuous transmit, channel-hopping mode.

5.6.6 Test Data

PASS.


Please refer to Annex D for details.

5.7 Interference Prevention Function

5.7.1 Test Requirement

Item	Limits
Identification	≥ 48 bits

5.7.2 Test Setup Diagram

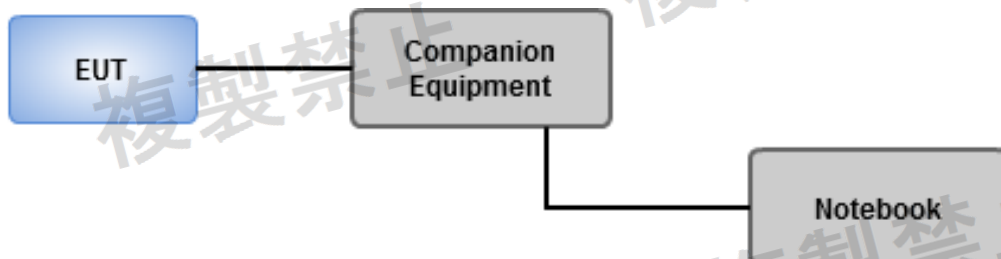

5.7.3 Test Procedure

1. In the case that the EUT has the function of automatically transmitting the identification code:
 - a. Transmit the predetermined identification codes from EUT.
 - b. Check the transmitted identification codes with the demodulator.
2. In the case of receiving the identification code:
 - a. Transmit the predetermined identification codes from the counterpart.
 - b. Check if communication is normal.
 - c. Transmit the signals other than predetermined ID codes from the counterpart.
 - d. check if the EUT stops the transmission, or if it displays that identification codes are different from the predetermined ones.

5.7.4 Test Deviation

There is no deviation with the original standard.

5.7.5 EUT Operation during Test

The EUT was programmed to be in continuous transmit, channel-hopping mode.

5.7.6 Test Data

PASS.


Mode	ID Code	Test Results
BT	Left Ear: 36:12:A4:26:E6:D3 Right Ear: 40:15:A3:58:C1:D7	Pass

5.8 Transmission Radiation Angle Width (3dB Beamwidth) Measurement

5.8.1 Test Requirement

Item	Limits
3dB antenna beam width	$360/A$ (If $A < 1$; then $A = 1$) $A = \{ \text{EIRP Power [mW]} / 16.36 \text{ for DS, OFDM} \}$ or $A = \{ \text{EIRP Power [mW]} / 4.9 \text{ for FH} \}$
Note: This test item will not be applied to the transmission antenna which has a gain of 2.14dBi or less.	

5.8.2 Test Setup Diagram

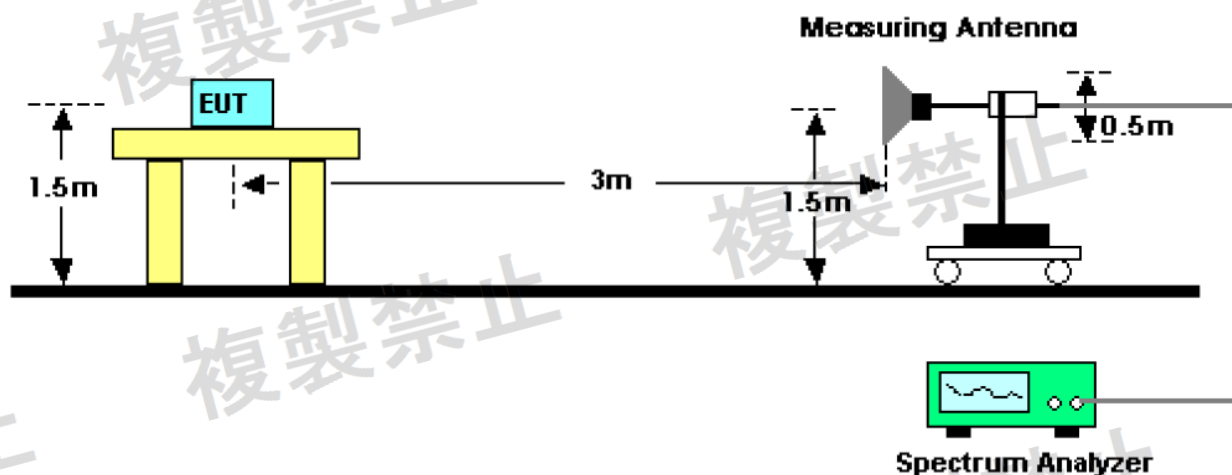

5.8.3 Test Procedure

1. Set EUT and measuring antenna at the same height and roughly facing each other.
2. Set spectrum analyzer with RBW=1 MHz, VBW=1 KHz, Y scale=5 dB, Detector=Peak, Trace mode=Max Hold, and tune reference level to observe receiving signal position.
3. Rotate directions of the EUT horizontally and vertically to find the maximum receiving power.
4. Move the measuring antenna height up and down within $\pm 50\text{cm}$ of EUT height and swing it to find the maximum output of measuring antenna. The output level at the spectrum analyzer is read as "E".
5. Calculate permitted radiation angle in horizontal and vertical using EIRP measured in another test method.
6. Calculate 3dB antenna beam width by the formula below $360/A$ (If $A < 1$; then $A = 1$). $A = \{ \text{EIRP Power [mW]} / 16.36 \text{ for DS, OFDM} \}$ or $A = \{ \text{EIRP Power [mW]} / 4.9 \text{ for FH} \}$

5.8.4 Test Deviation

There is no deviation with the original standard.

5.8.5 EUT Operation during Test

The EUT was programmed to be in continuous transmit, channel-hopping mode.

5.8.6 Test Data



Note: Because the EIRP is less than 6.91dBm/MHz, this item is not applicable.

5.9 Construction Protection Confirmation Method

The RF and modulation portions are protected against illegal modification as following method:

Protected Method	Description
Structure protection	The terminal number is 50 terminal pitch is 1mm. it can't be easily opened and modified.

Reference Photo

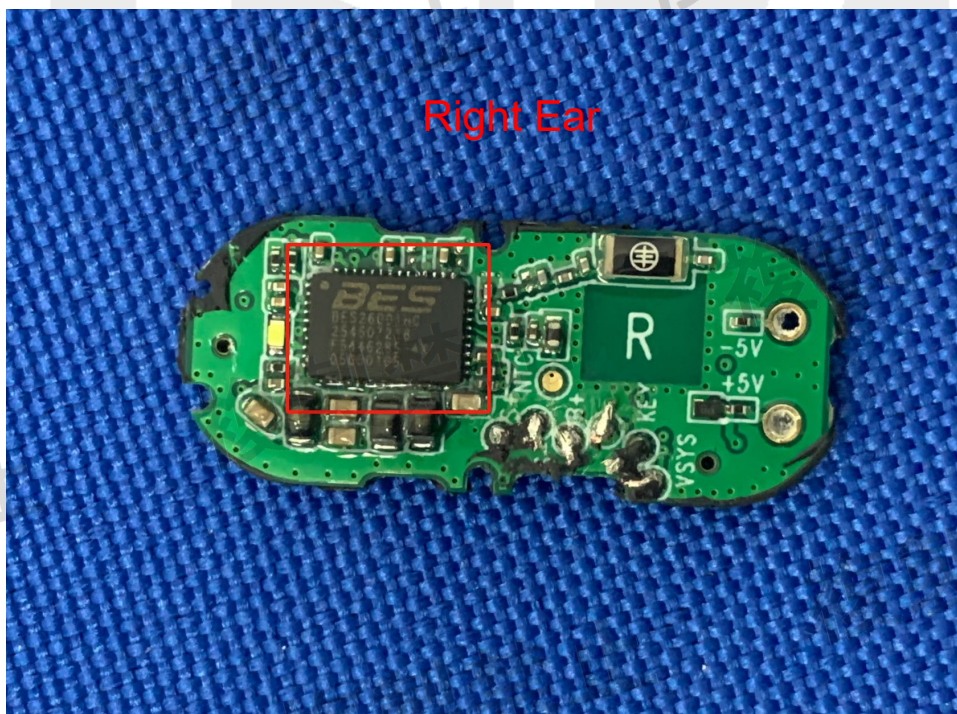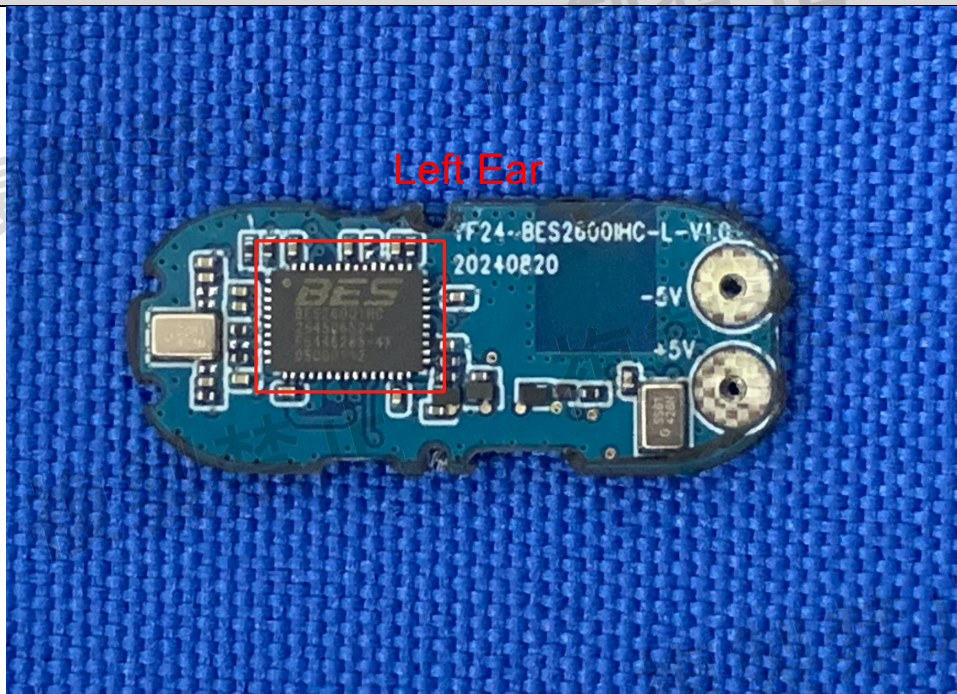

ANNEX A TEST SETUP PHOTOS

Please refer to the document "8429EU121601W-AA.PDF"

ANNEX B EXTERNAL PHOTOS

Please refer to the document "8429EU121601W-AB.PDF"

ANNEX C INTERNAL PHOTOS

Please refer to the document "8429EU121601W-AC.PDF"

ANNEX D TEST DATA

Test Summary

Item	Result
Frequency Error	Pass
Occupied Bandwidth	Pass
Antenna Power	Pass
Dwell Time	Pass
Spurious Emission Intensity	Pass
Secondary Radiated Emission	Pass

Left Ear Test Data:

1. Frequency Error


1.1 Test Result


1.1.1 Ant1


Ant1								
ENV	Mode	TX Type	Frequency (MHz)	Packet Type	Measured Frequency (MHz)	Tolerance (ppm)		Verdict
						Result	Limit	
NTNV	GFSK	SISO	2402	DH5	2402.054	22.48	-50 to 50	Pass
			2480	DH5	2480.055	22.38	-50 to 50	Pass
	$\pi/4$ DQPSK	SISO	2402	2DH5	2402.048	19.93	-50 to 50	Pass
			2480	2DH5	2480.050	20.13	-50 to 50	Pass
	8DPSK	SISO	2402	3DH5	2402.040	16.59	-50 to 50	Pass
			2480	3DH5	2480.042	17.13	-50 to 50	Pass

1.2 Test Graph

1.2.1 Ant1

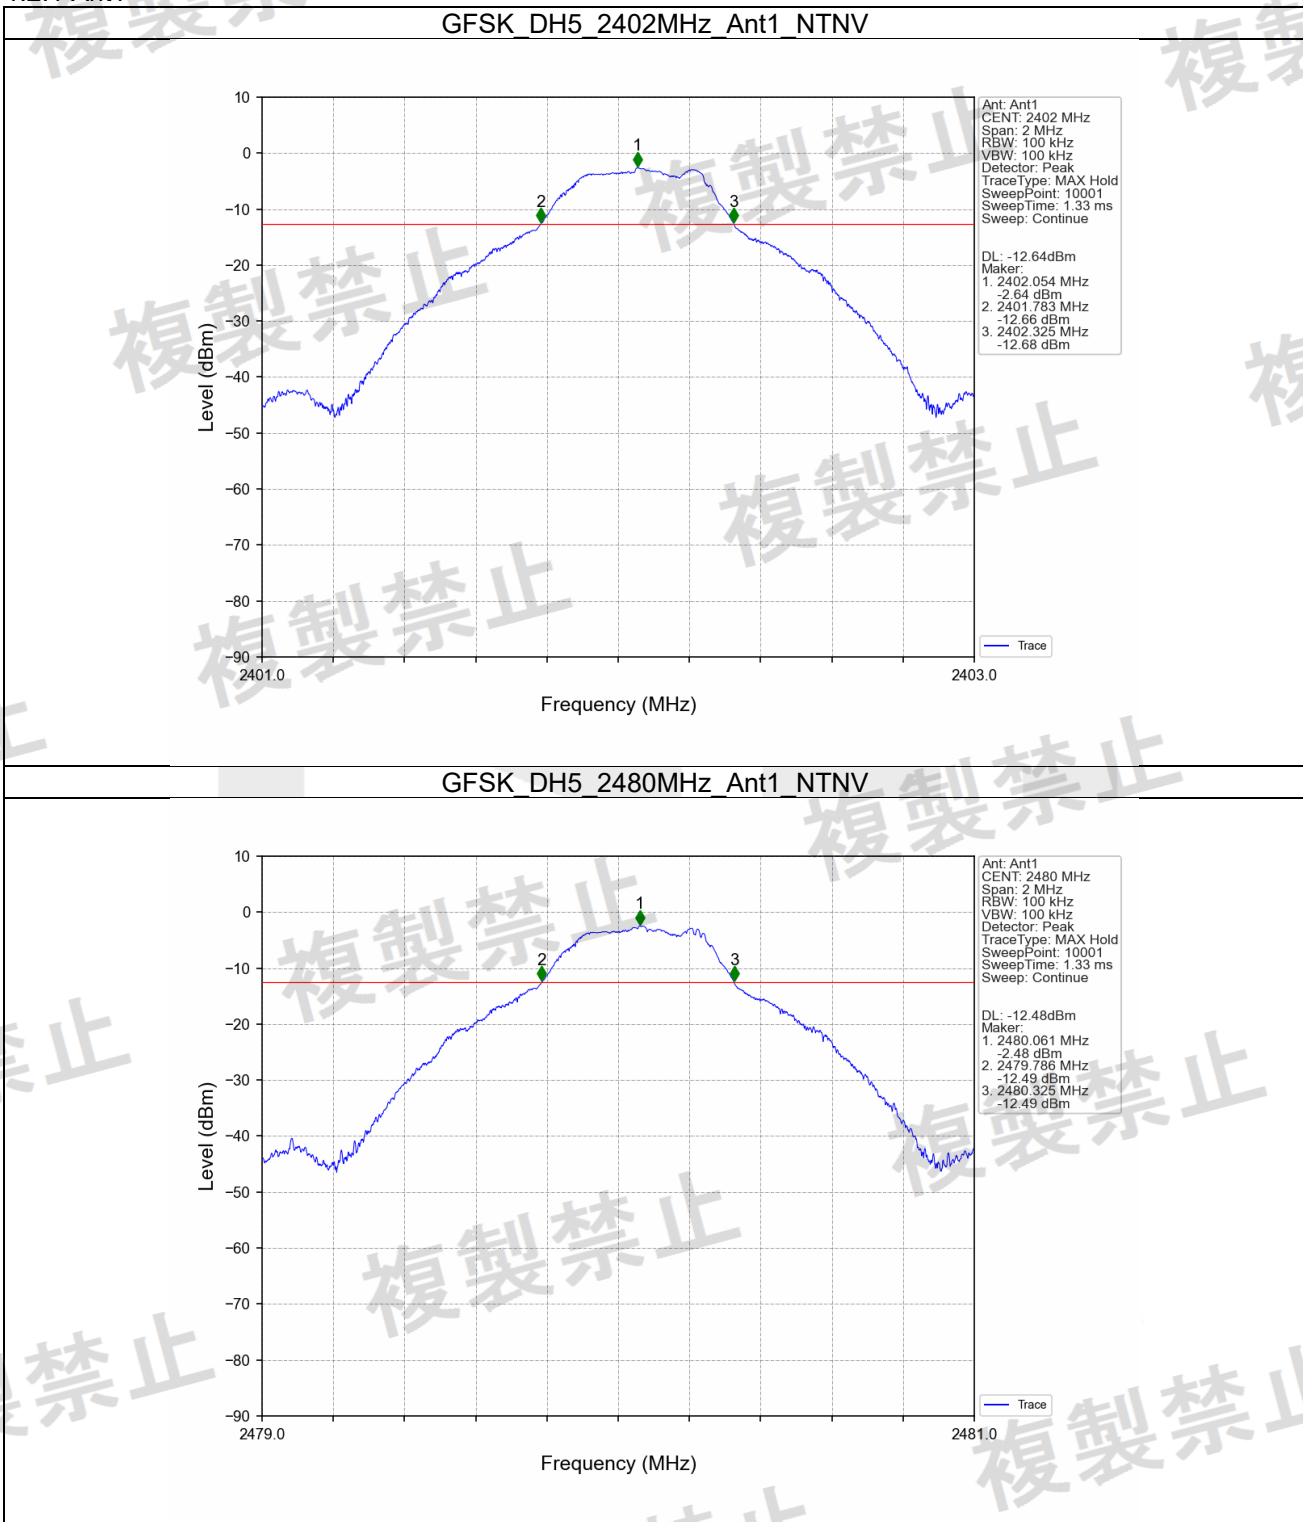

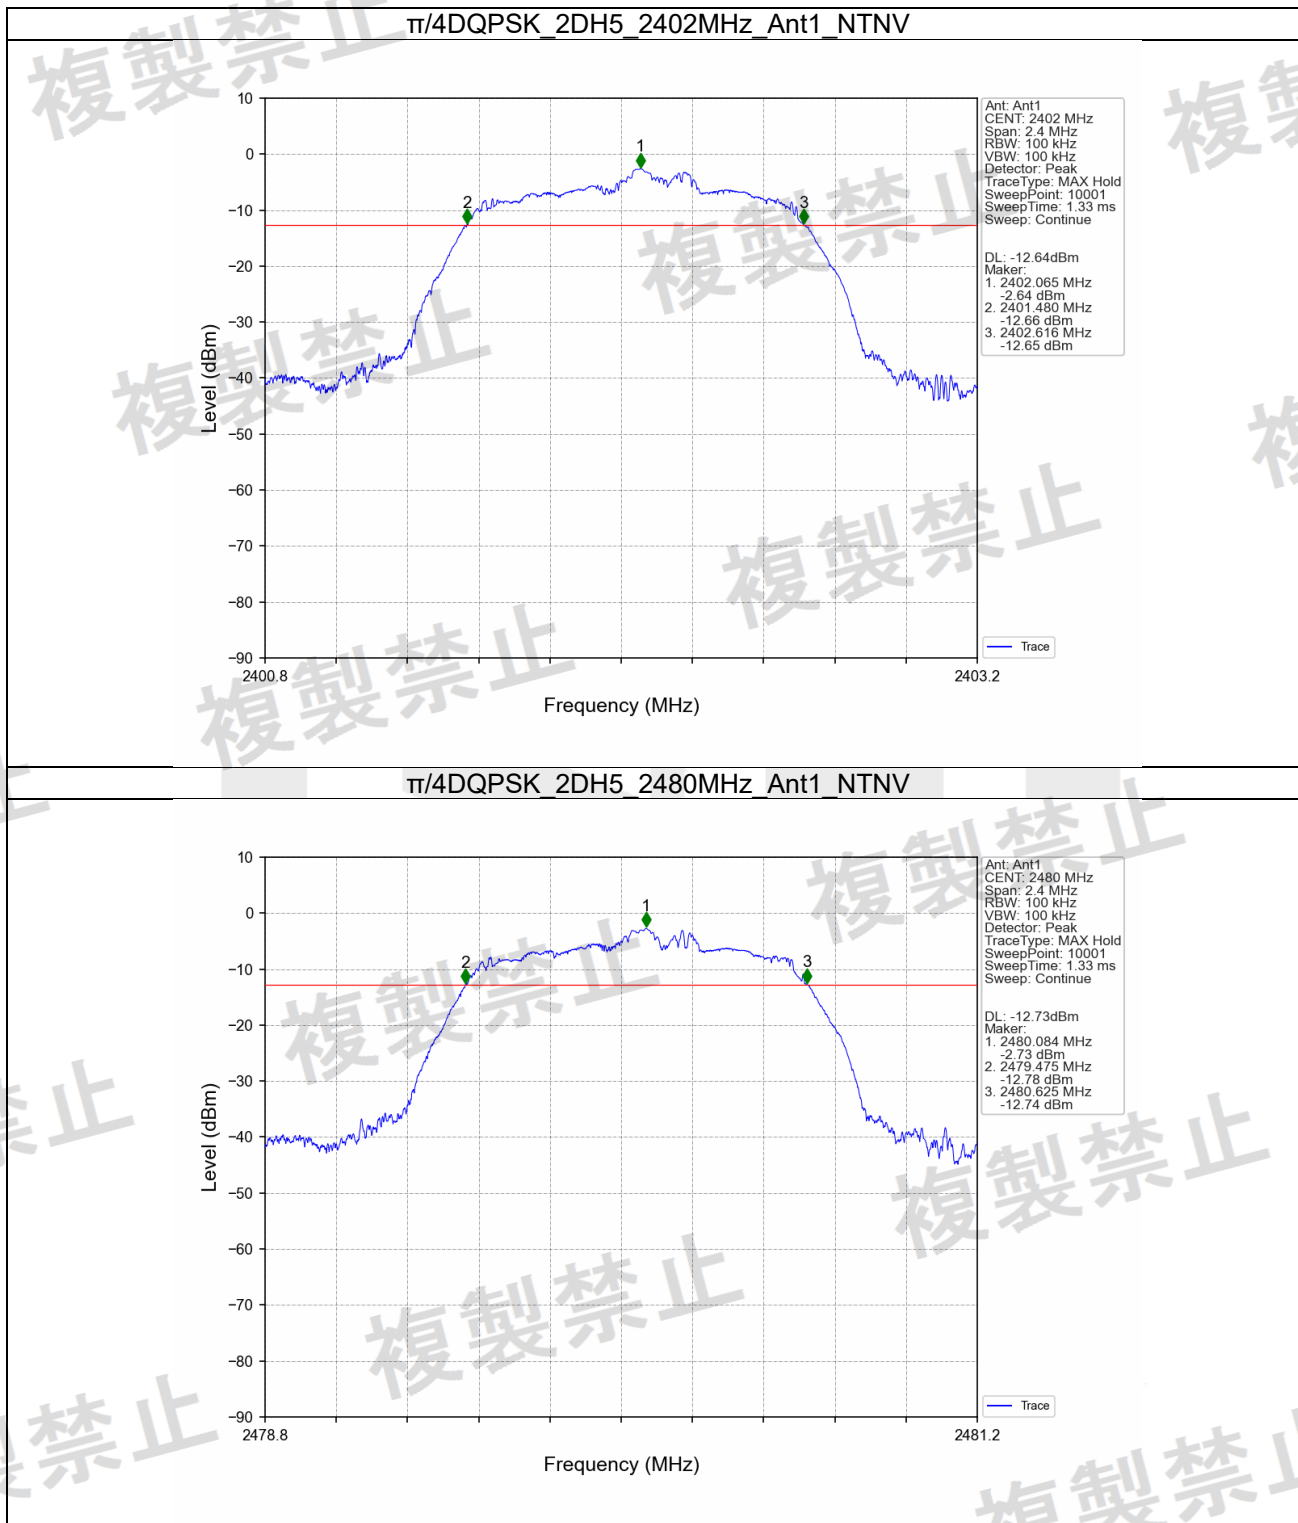

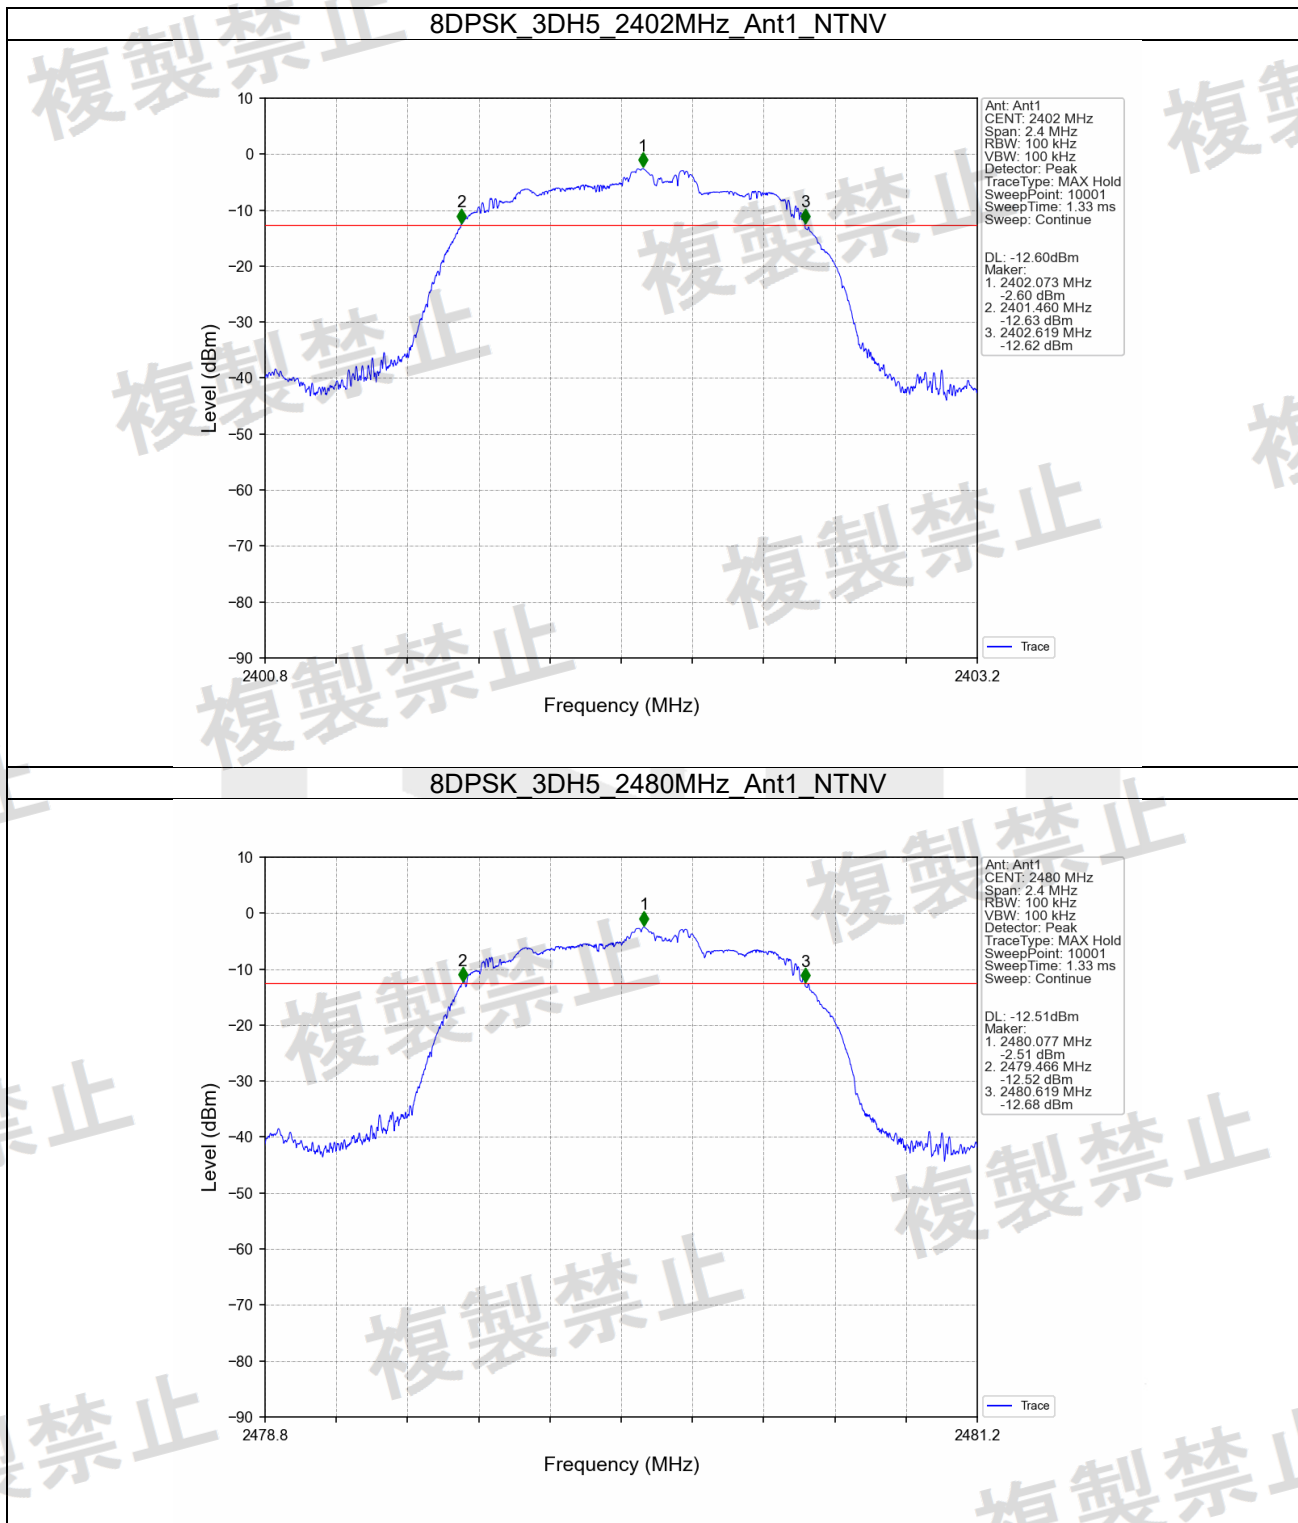

2. Occupied Bandwidth


2.1 Test Result


2.1.1 OBW

ENV	Mode	TX Type	Frequency (MHz)	Packet Type	99% Occupied Bandwidth (MHz)		Verdict
					ANT1	Limit	
NTNV	GFSK	SISO	HOPP	DH5	78.788	<=83.5	Pass
	$\pi/4$ DQPSK	SISO	HOPP	2DH5	78.885	<=83.5	Pass
	8DPSK	SISO	HOPP	3DH5	78.861	<=83.5	Pass

2.2 Test Graph

2.2.1 OBW

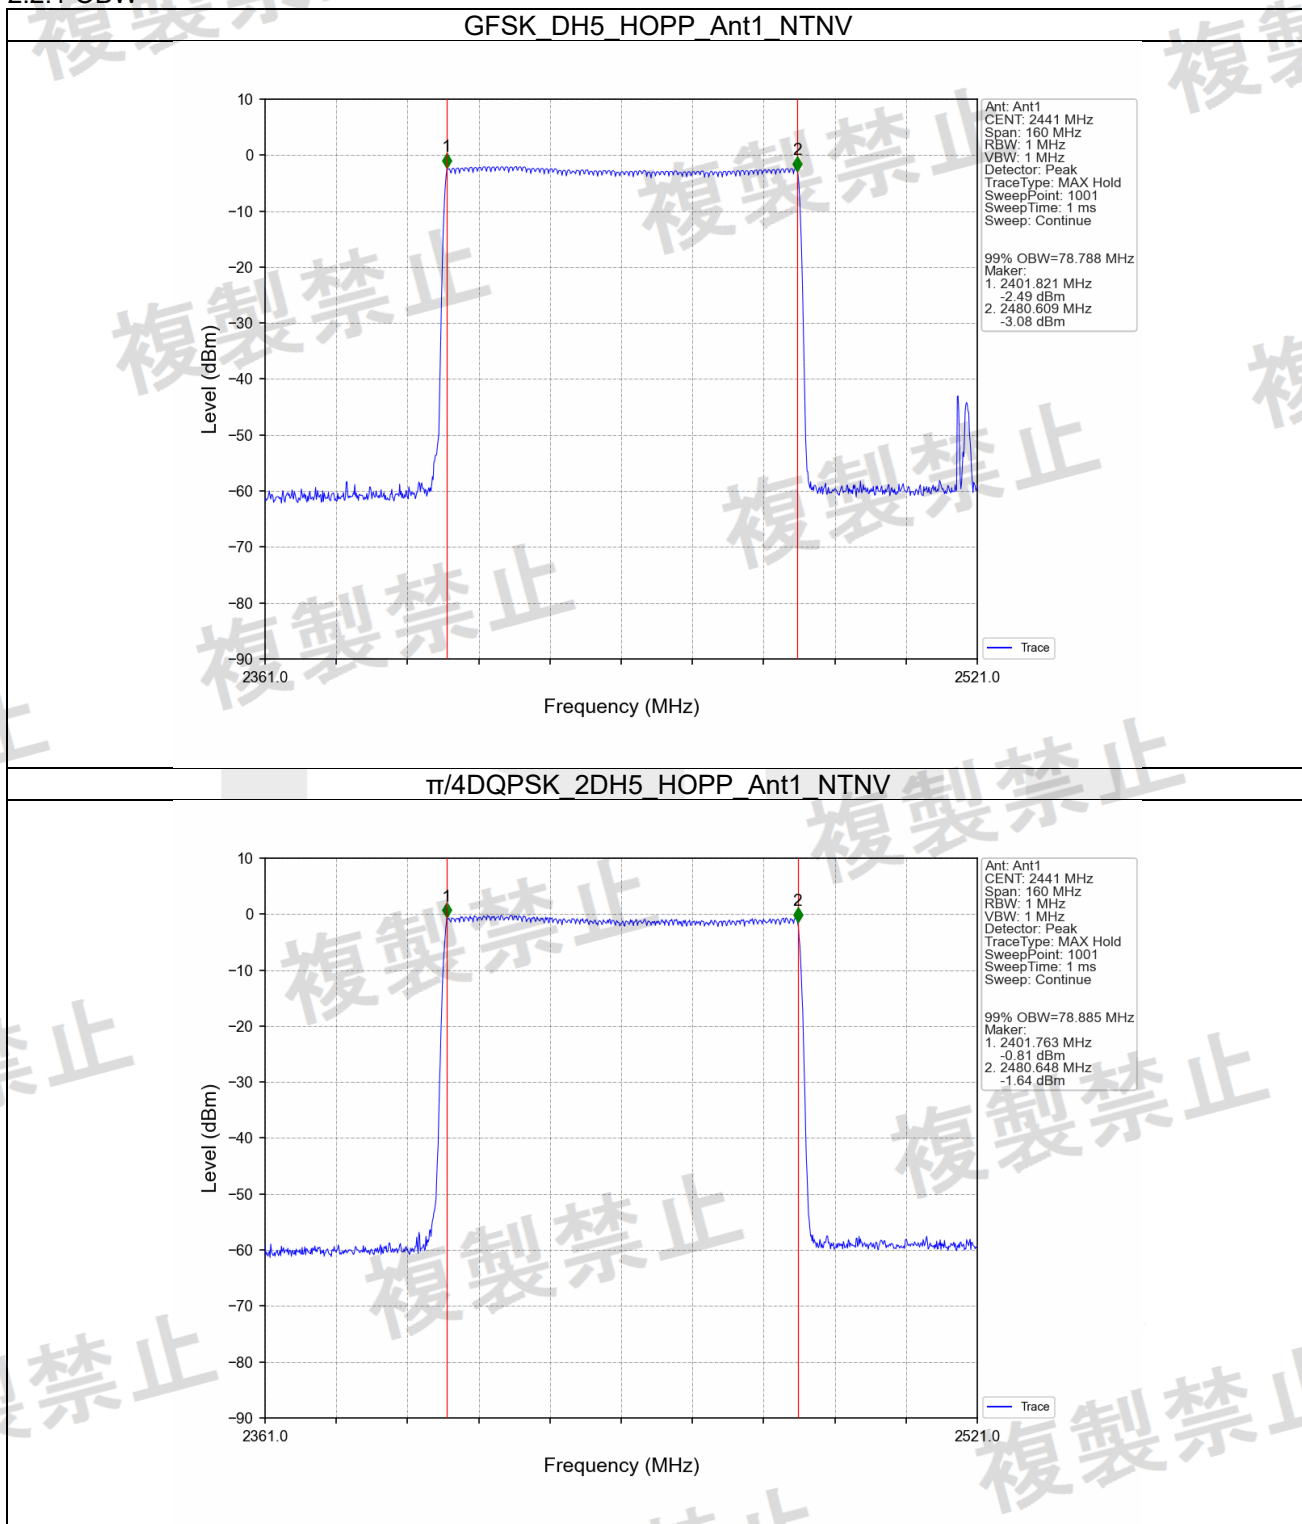

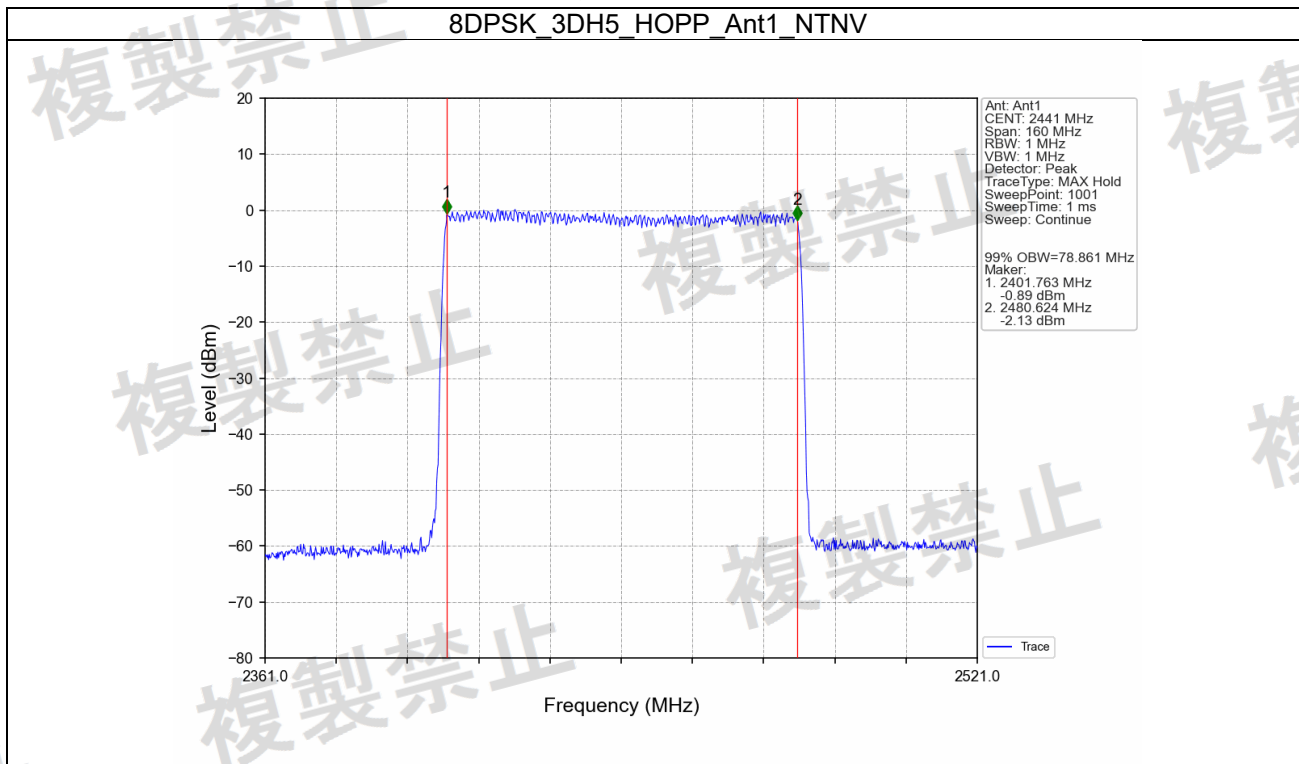

3. Spread Bandwidth


3.1 Test Result


3.1.1 SPBW

ENV	Mode	TX Type	Frequency (MHz)	Packet Type	Spread Bandwidth (MHz)		Verdict
					ANT1	Limit	
NTNV	GFSK	SISO	HOPP	DH5	71.986	/	Only For Report
	$\pi/4$ DQPSK	SISO	HOPP	2DH5	72.029	/	Only For Report
	8DPSK	SISO	HOPP	3DH5	71.895	/	Only For Report

3.2 Test Graph

3.2.1 SPBW

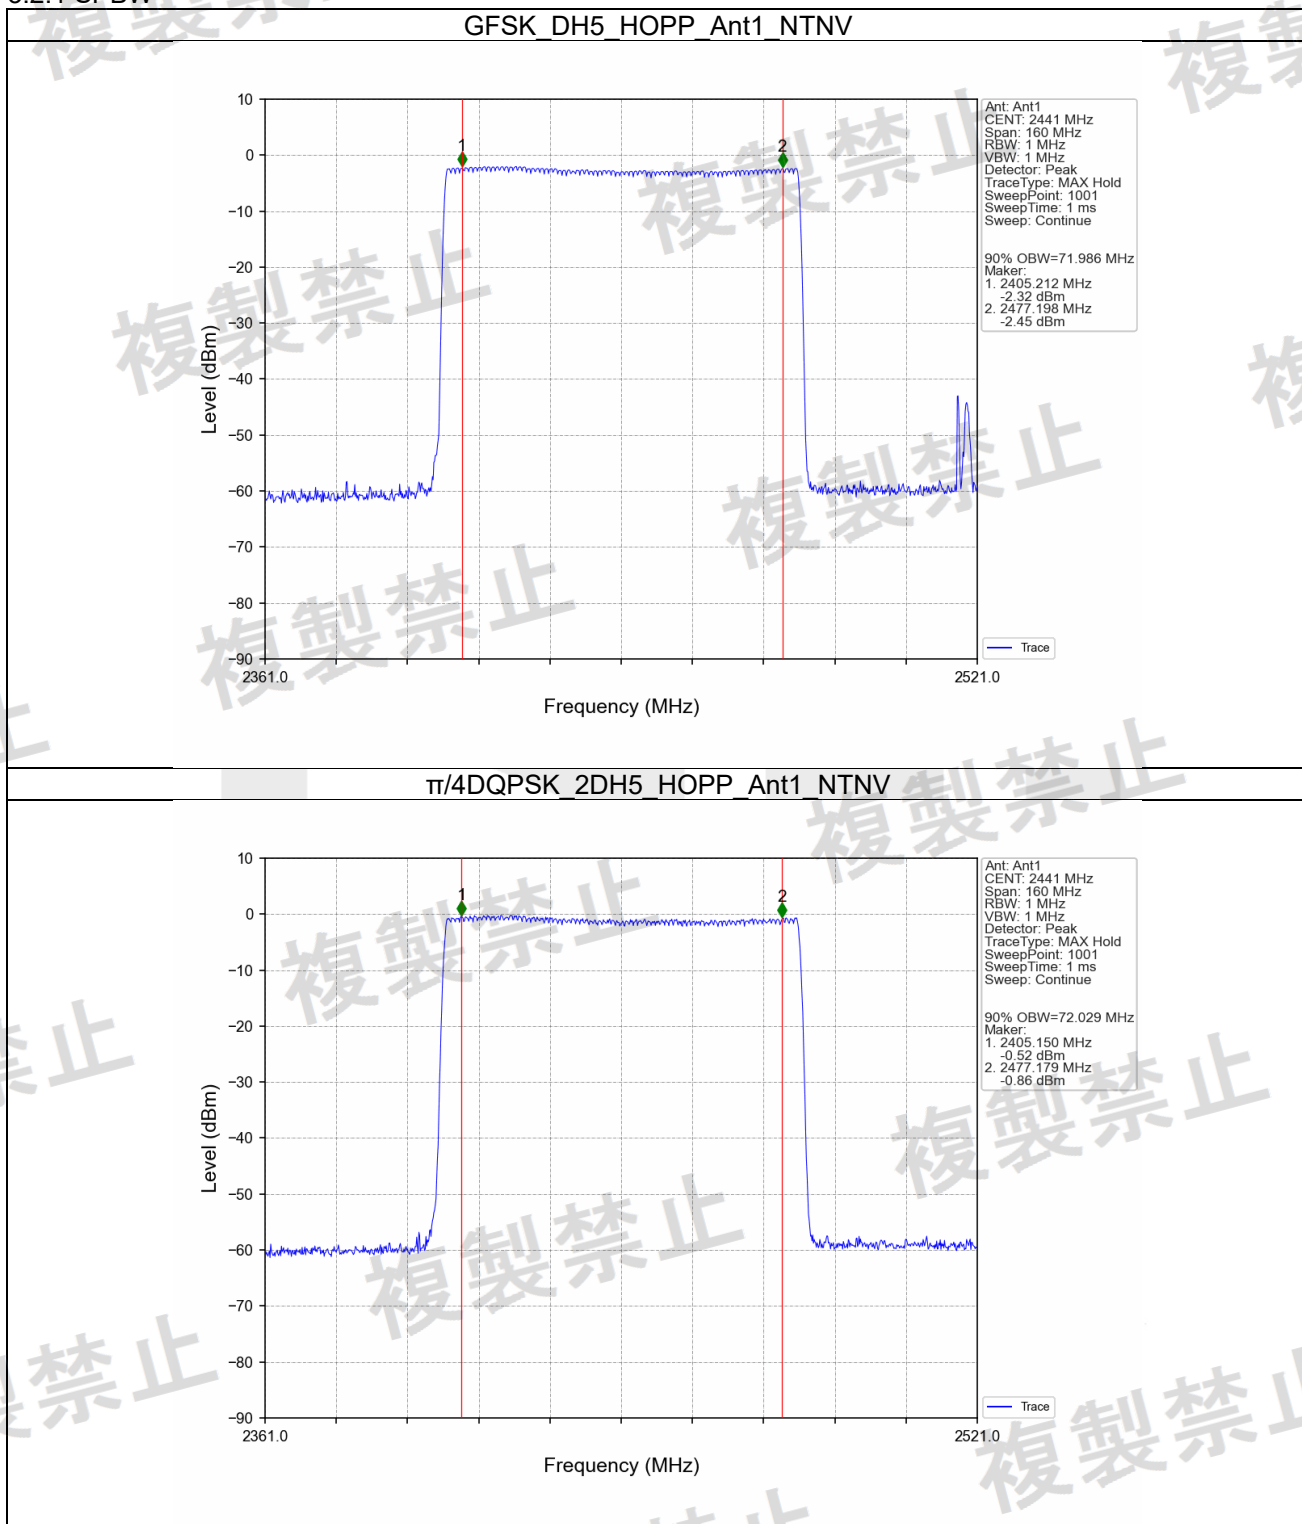

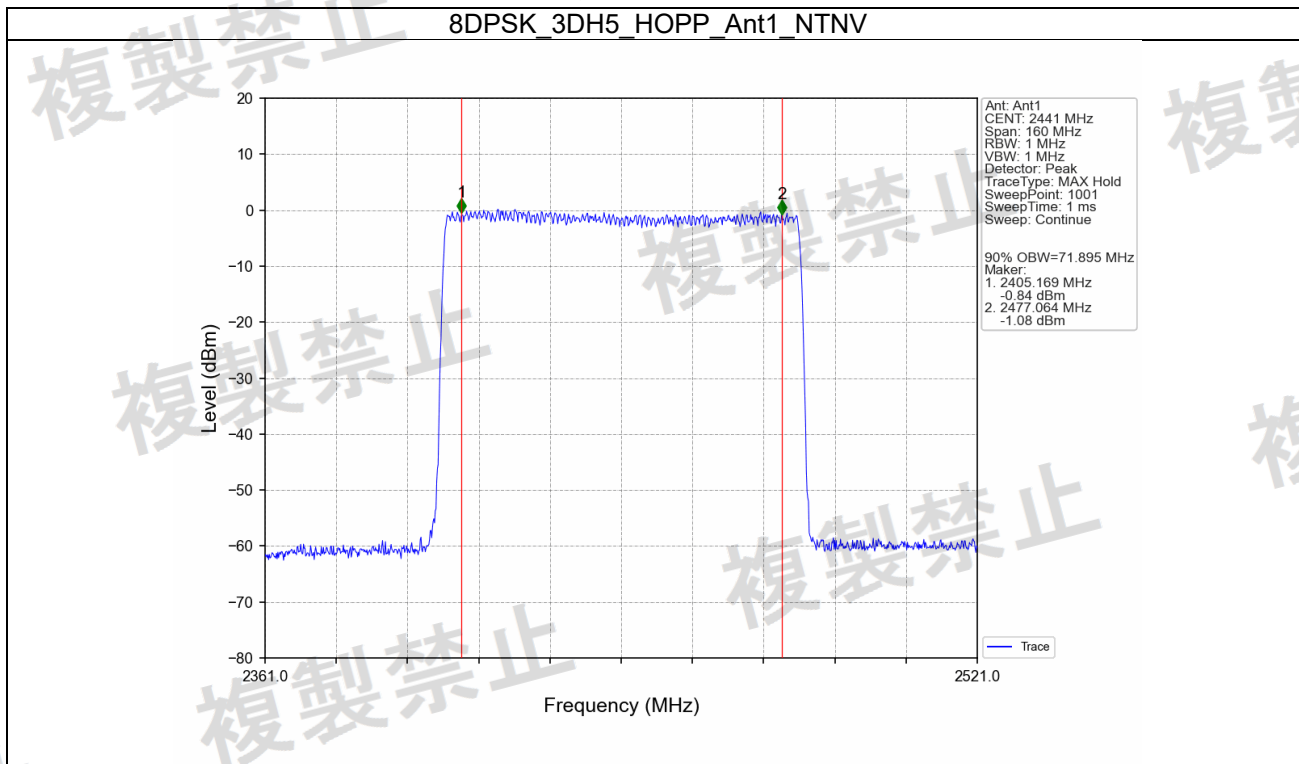

4. Antenna Power

4.1 Test Result

4.1.1 Power

ENV	Mode	TX Type	Frequency (MHz)	Packet Type	Total power (mW)			Antenna Power Density PD (mW / MHz)	Nominal Power (mW/MHz)	Tolerance (%)		Limit (mW/ MHz)	Verdict
					dBm	mW	Spread Bandwidth (MHz)			Measured	Limit		
NTNV	GFSK	SISO	HOPP	DH5	6.88	4.875	71.986	0.068	0.100	-32.00	20	3	Pass
	$\pi/4$ DQPSK	SISO	HOPP	2DH5	6.73	4.710	72.029	0.065	0.100	-35.00	20	3	Pass
	8DPSK	SISO	HOPP	3DH5	6.45	4.416	71.895	0.061	0.100	-39.00	20	3	Pass
Note: 1. Antenna Power Density PD = Total power (mW) / Spread Spectrum Bandwidth MHz.													

4.1.2 EIRP


ENV	Mode	TX Type	Frequency (MHz)	ANT	Gain (dBi)	Measured Power (dBm/MHz)	EIRP (dBm/MHz)		Verdict
							Result	Limit	
NTNV	GFSK	SISO	HOPP	1	2.50	-11.68	-9.18	12.14	Pass
	$\pi/4$ DQPSK	SISO	HOPP	1	2.50	-11.87	-9.37	12.14	Pass
	8DPSK	SISO	HOPP	1	2.50	-12.15	-9.65	12.14	Pass
Note: E.I.R.P = Measured Power + Antenna Gain									

5. Dwell Time
5.1 Test Result
5.1.1 Ant1


Ant1											
ENV	Mode	TX Type	Frequency (MHz)	Packet Type	Spreading Rate	T_on (ms)	Period (ms)	Hopp Number	Dwell Time (ms)		Verdict
									Result	Limit	
NTNV	GFSK	SISO	2402	DH1	71.986	0.379	1.250	79	110.512	<=400	Pass
				DH3	71.986	1.635	2.500	79	238.374	<=400	Pass
				DH5	71.986	2.883	3.750	79	280.217	<=400	Pass
			2480	DH1	71.986	0.378	1.250	79	110.221	<=400	Pass
				DH3	71.986	1.634	2.500	79	238.228	<=400	Pass
				DH5	71.986	2.883	3.750	79	280.217	<=400	Pass
	$\pi/4$ DQPSK	SISO	2402	2DH1	72.029	0.382	1.250	79	111.453	<=400	Pass
				2DH3	72.029	1.632	2.500	79	238.079	<=400	Pass
				2DH5	72.029	2.887	3.749	79	280.848	<=400	Pass
			2480	2DH1	72.029	0.390	1.250	79	113.788	<=400	Pass
				2DH3	72.029	1.643	2.500	79	239.683	<=400	Pass
				2DH5	72.029	2.890	3.750	79	281.065	<=400	Pass
	8DPSK	SISO	2402	3DH1	71.895	0.385	1.250	79	112.120	<=400	Pass
				3DH3	71.895	1.632	2.500	79	237.636	<=400	Pass
				3DH5	71.895	2.882	3.750	79	279.766	<=400	Pass
			2480	3DH1	71.895	0.385	1.250	79	112.120	<=400	Pass
				3DH3	71.895	1.642	2.500	79	239.092	<=400	Pass
				3DH5	71.895	2.888	3.750	79	280.348	<=400	Pass

5.2 Test Graph


5.2.1 Ant1

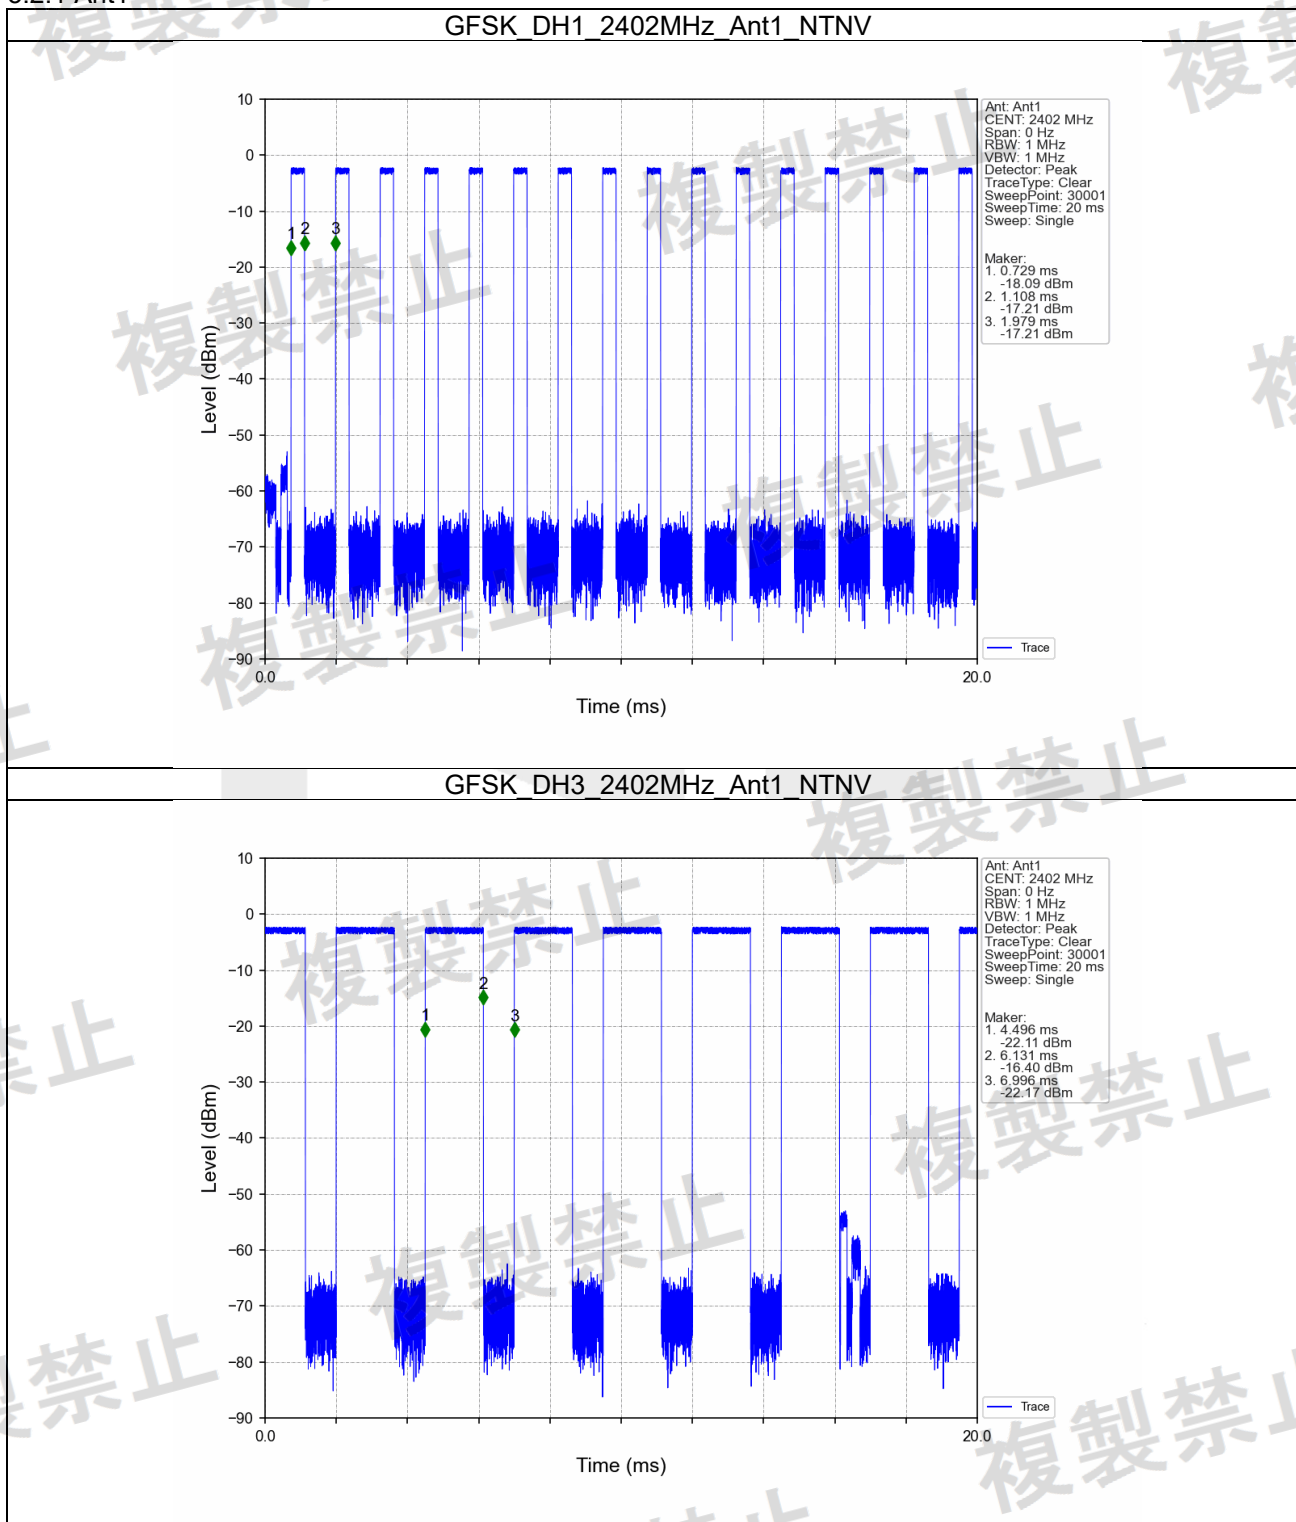


GFSK DH5_2402MHz_Ant1_NTNV

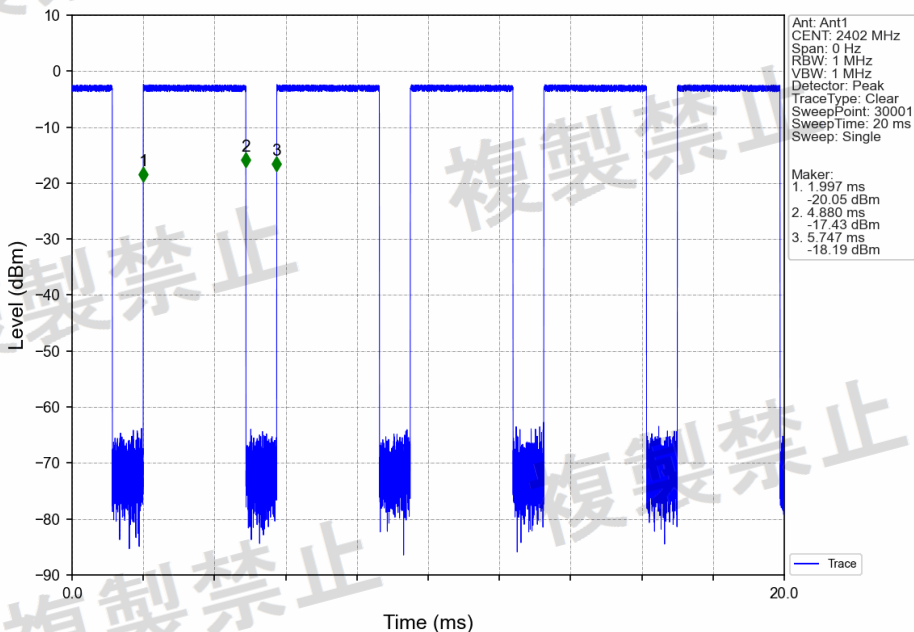


GFSK DH1_2480MHz_Ant1_NTNV

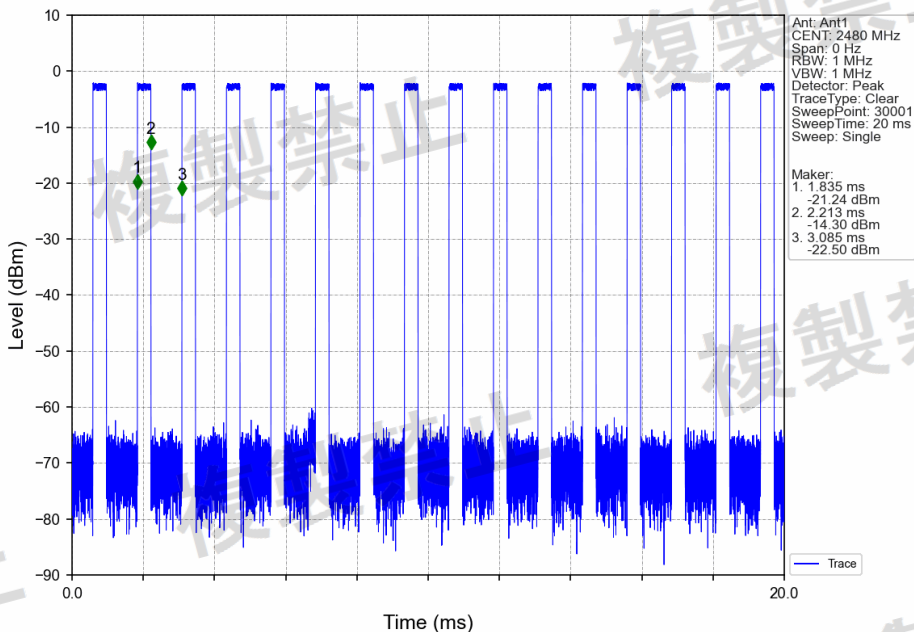



GFSK DH3_2480MHz_Ant1_NTNV

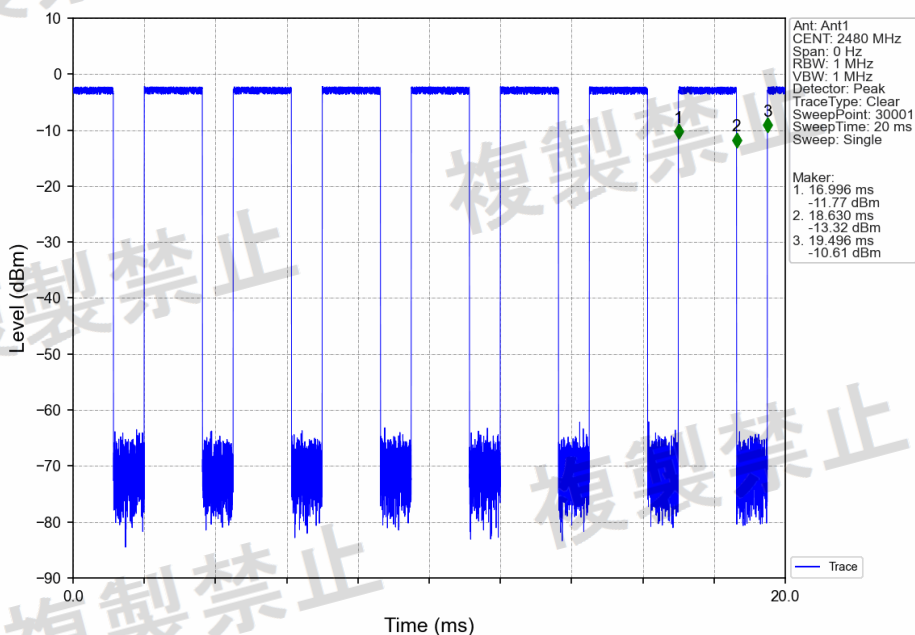



GFSK DH5_2480MHz_Ant1_NTNV

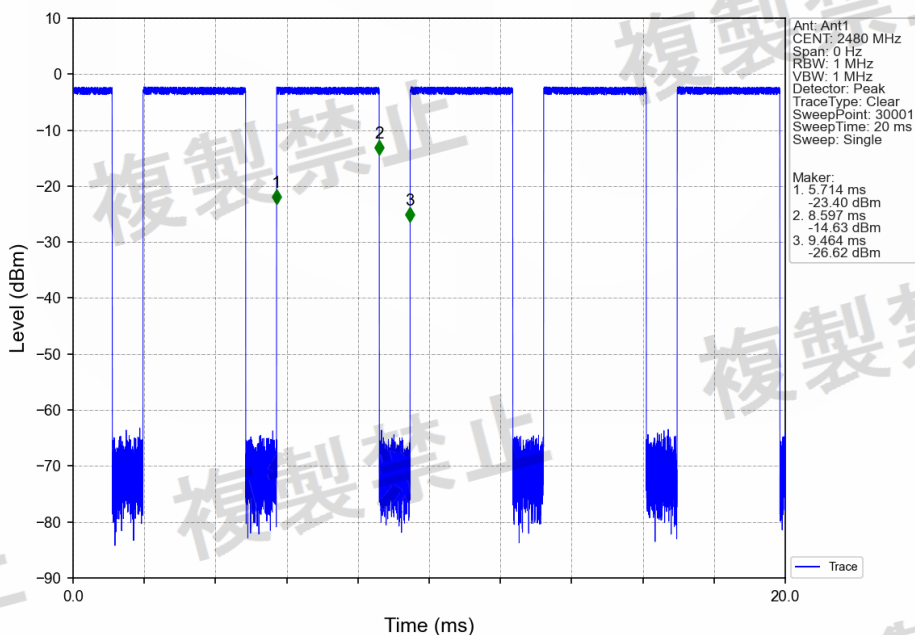


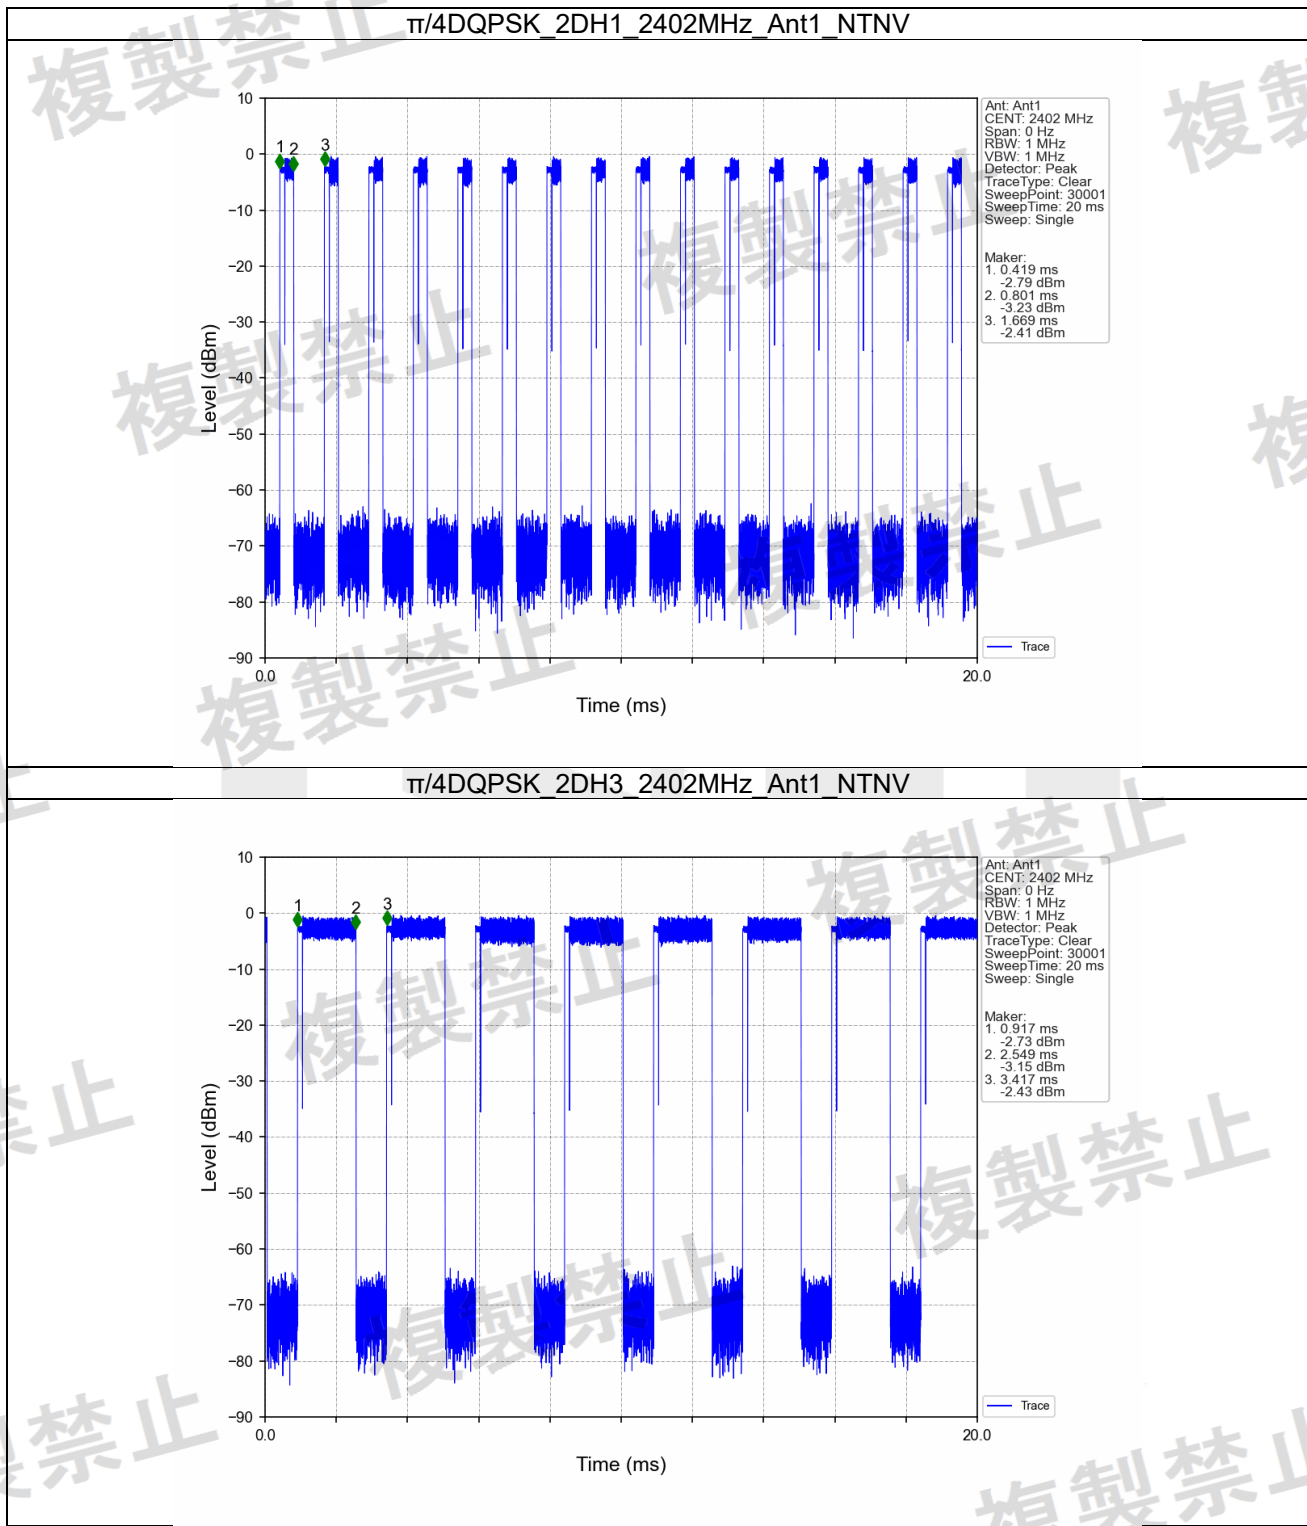

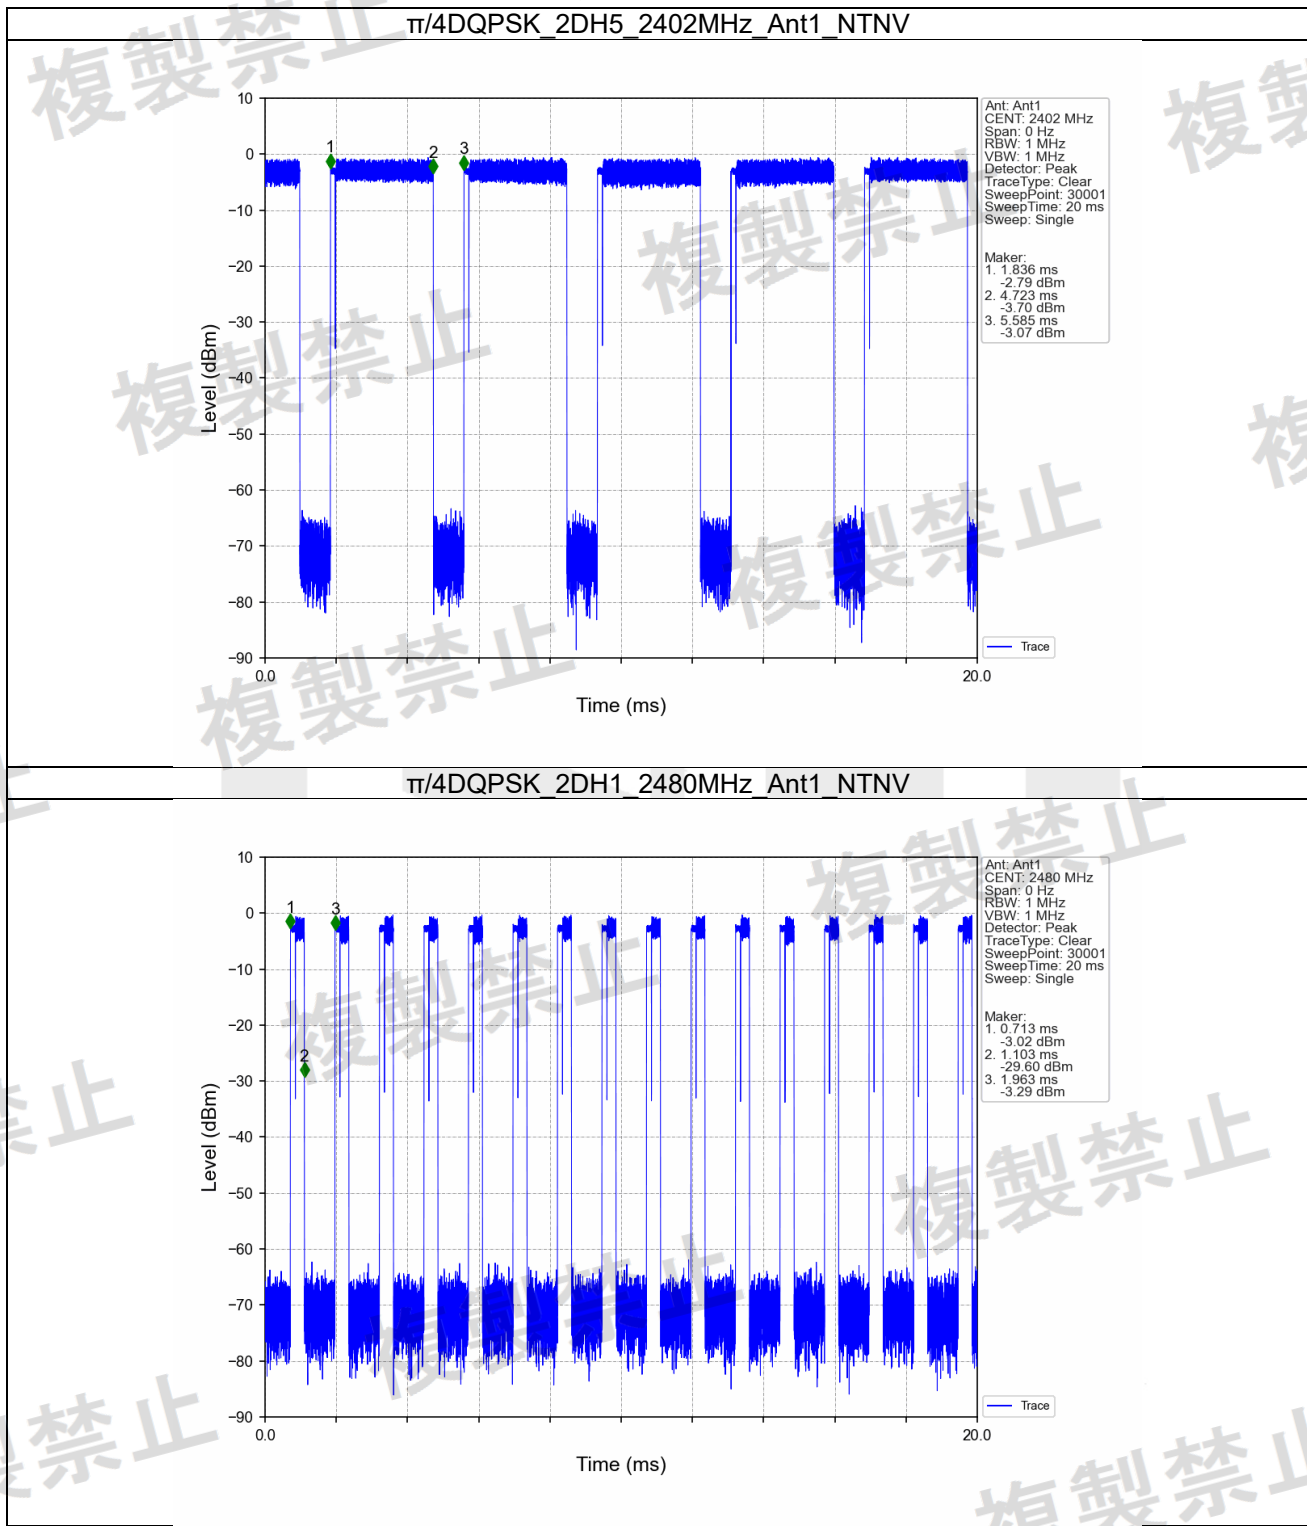


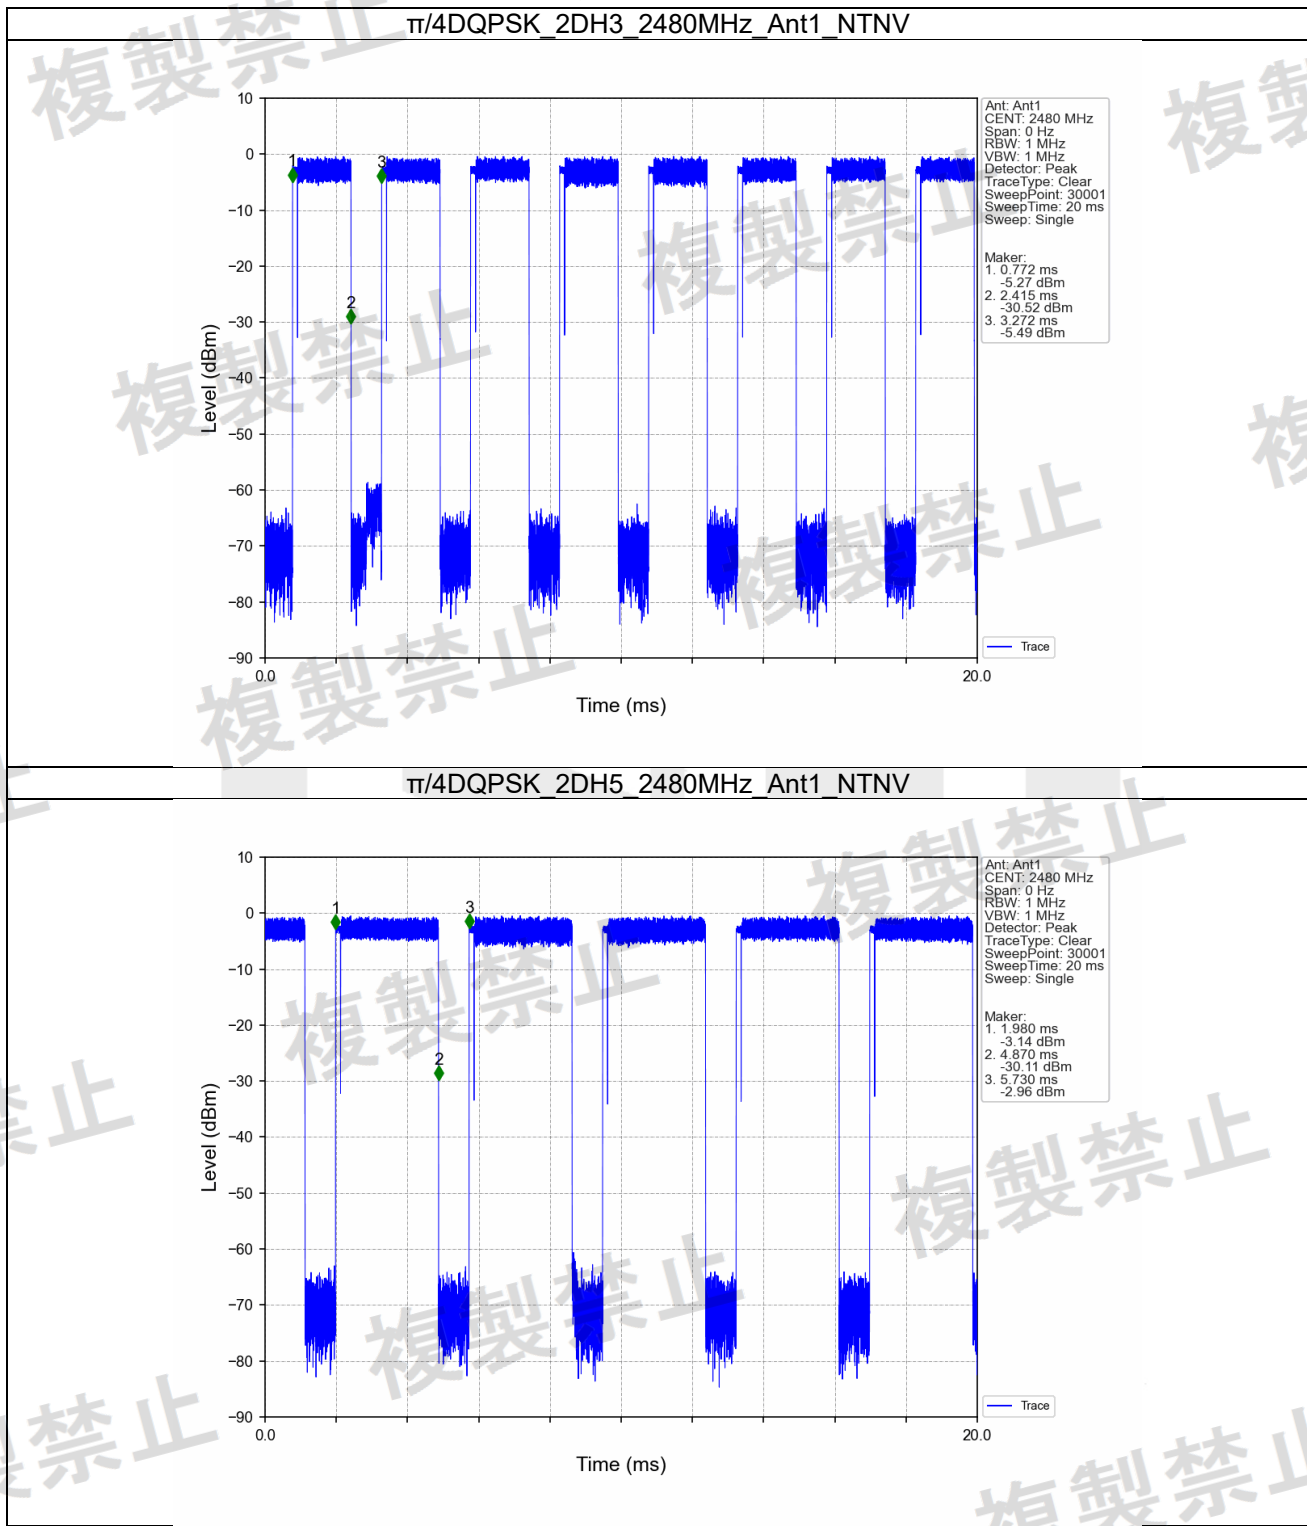

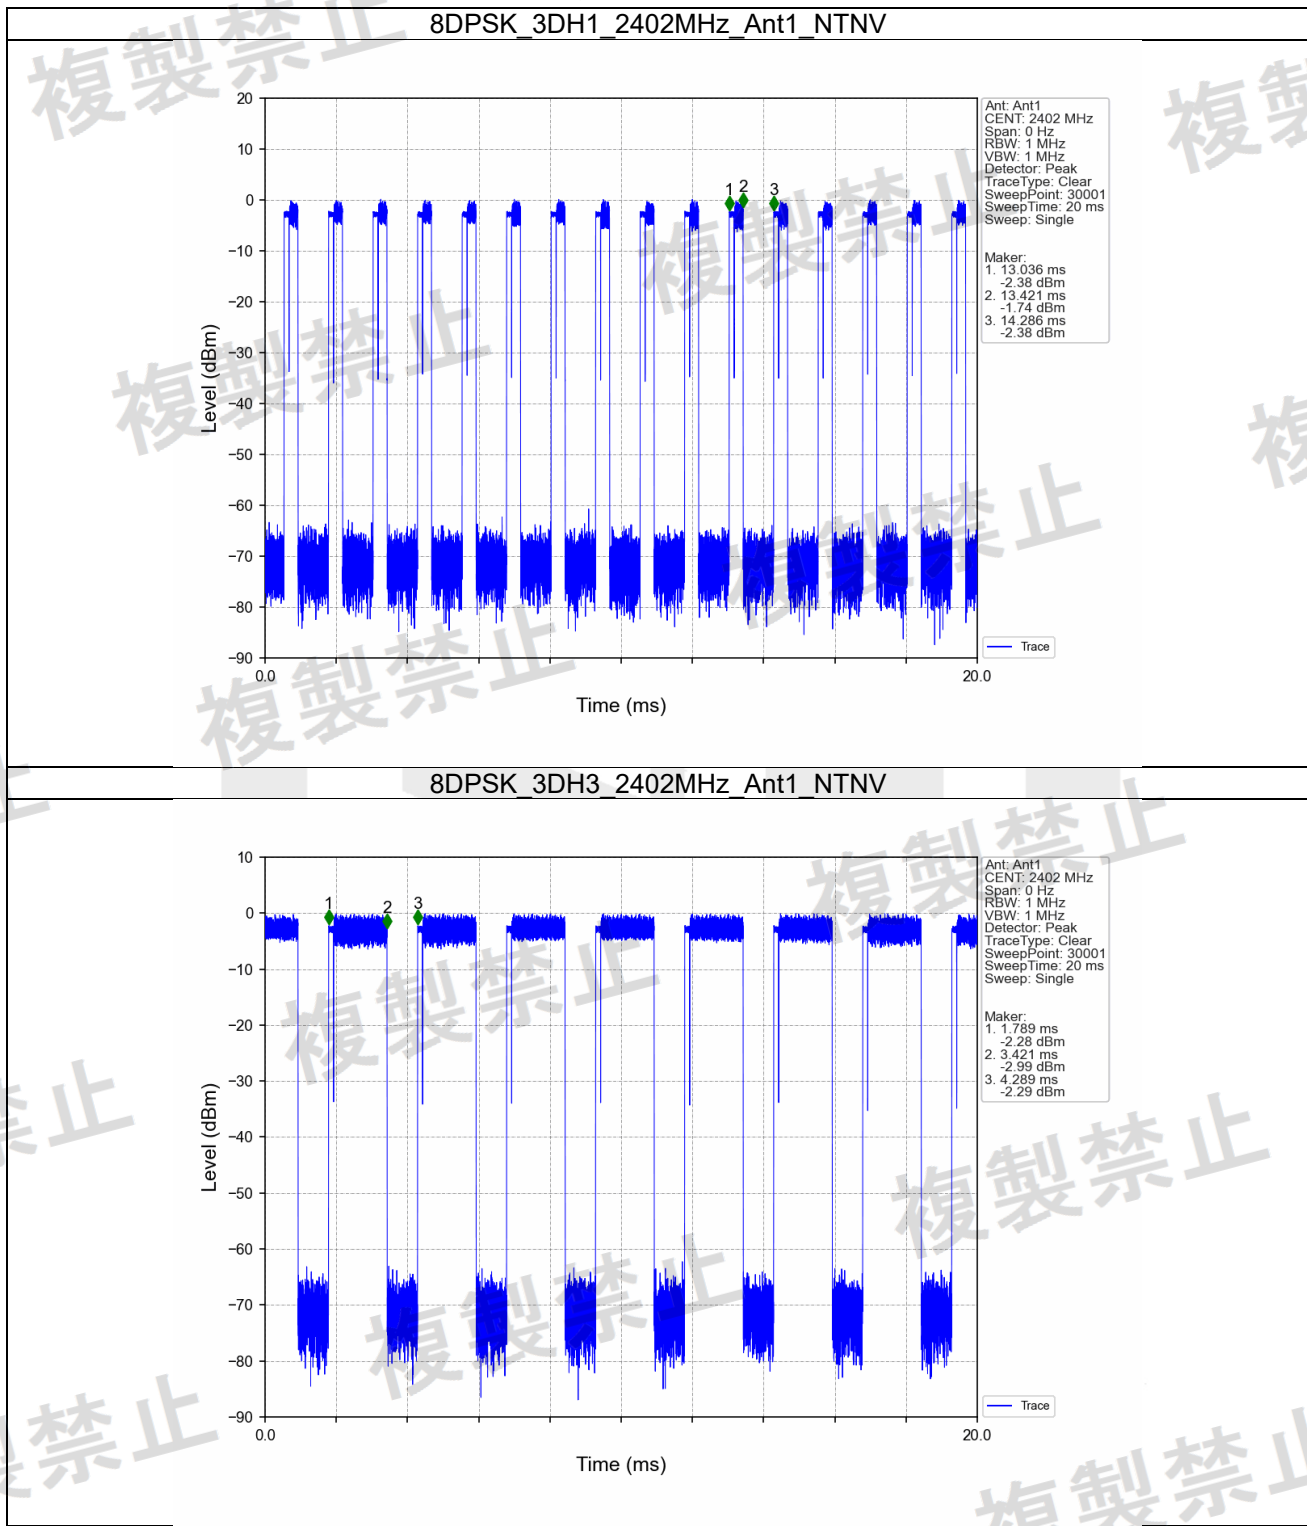


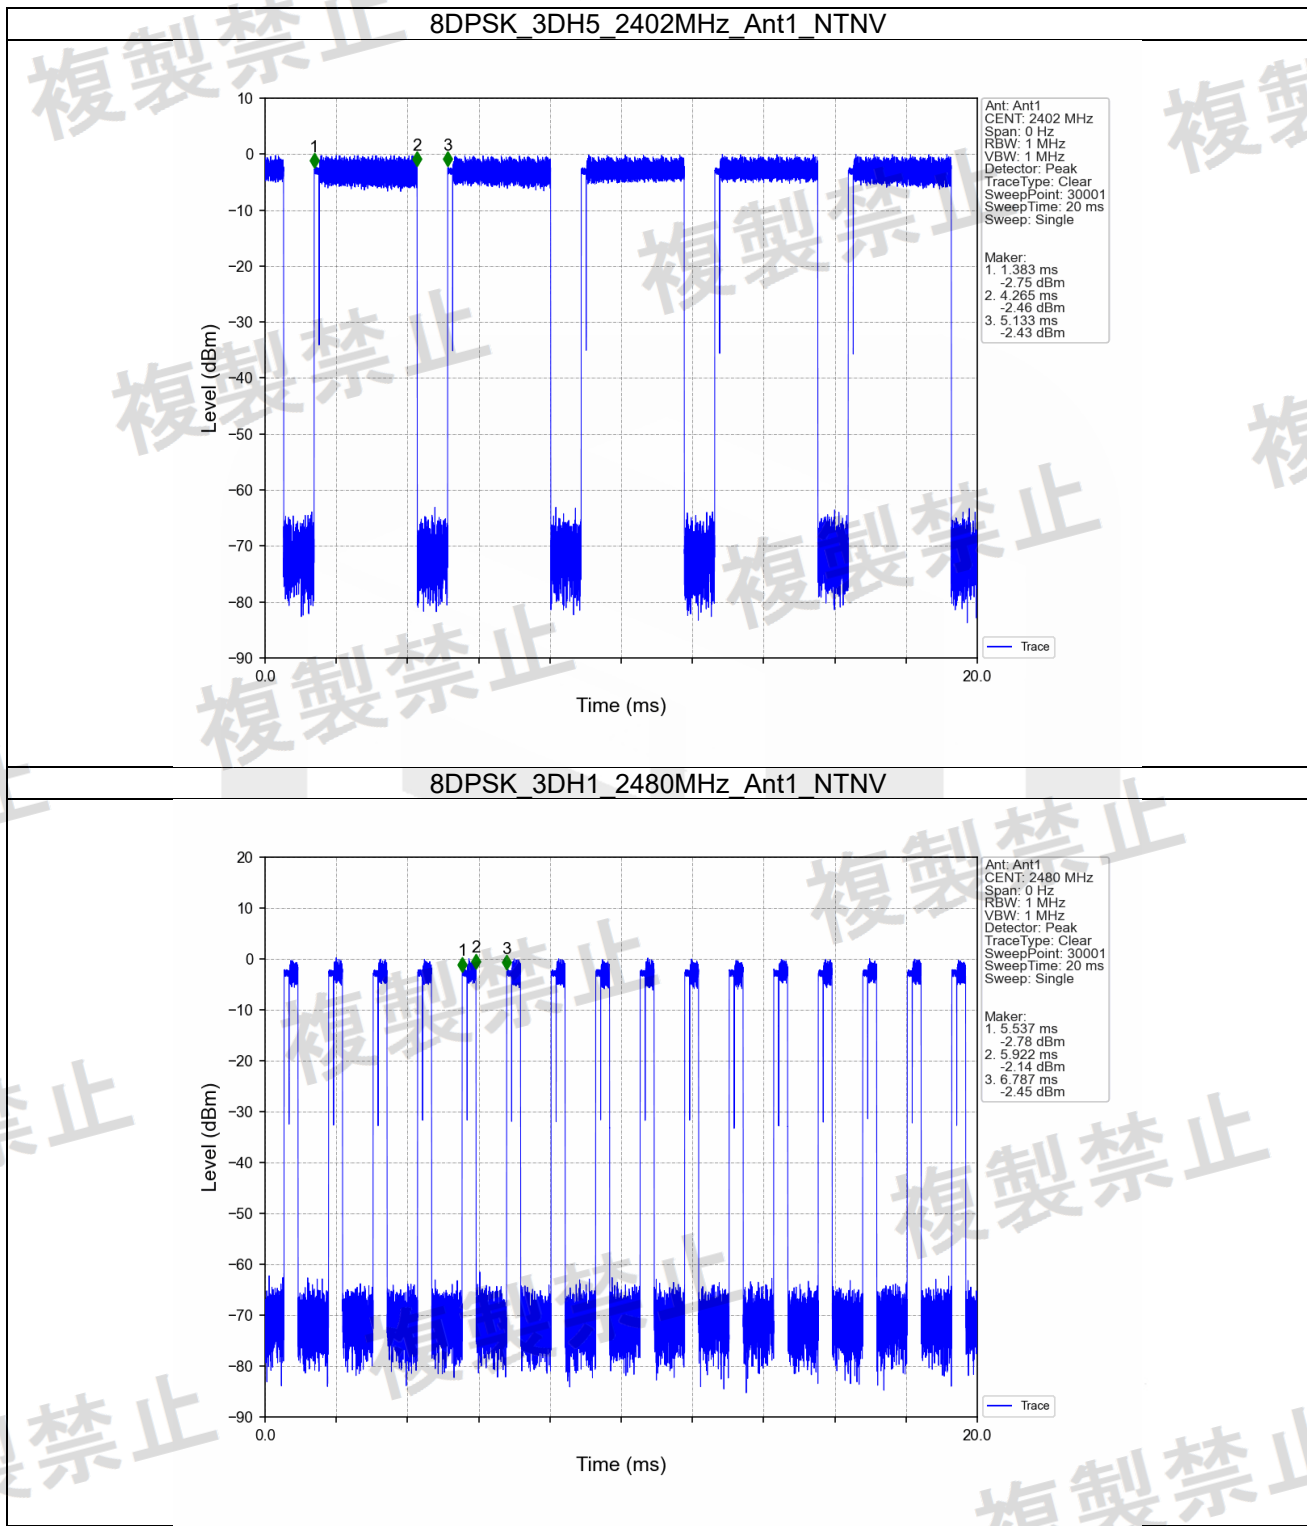

8DPSK 3DH3 2480MHz_Ant1_NTNV

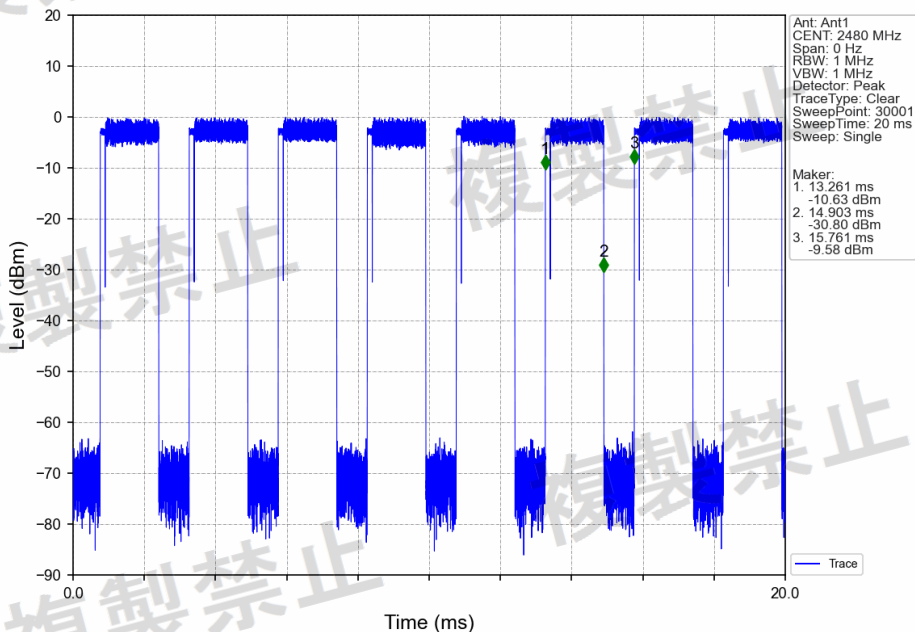

8DPSK 3DH5 2480MHz_Ant1_NTNV

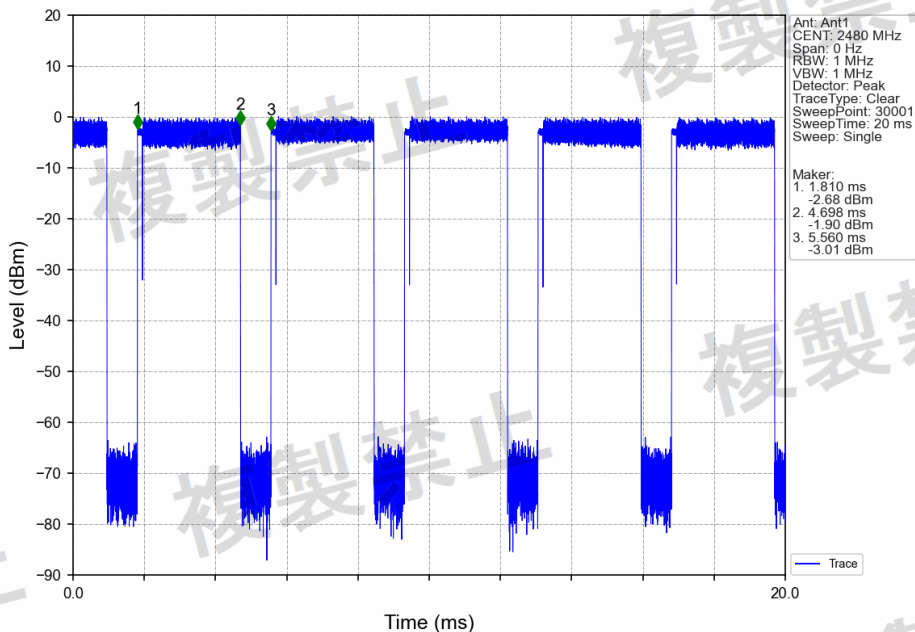

6. Spurious Emission Intensity


6.1 Test Result

6.1.1 TxSe_NTNV


NTNV												
Mode	TX Type	Freq. (MHz)	ANT	Freq. Range		Marker					Limit (uW /MHz)	Verdict
				Start (MHz)	Stop (MHz)	Freq. (MHz)	PK Power (dBm /MHz)	PK Power (uW /MHz)	AV Power (dBm /MHz)	AV Power (uW /MHz)		
GFSK	SISO	2402	1	30	2387	111	-51.81	0.007	/	/	2.5	Pass
				2387	2400	2399.987	-45.39	0.029	/	/	25	Pass
				2483.5	2496.5	2485.034	-56.07	0.002	/	/	25	Pass
				2496.5	12500	3203.5	-42.17	0.061	/	/	2.5	Pass
		2480	1	30	2387	111	-51.87	0.007	/	/	2.5	Pass
				2387	2400	2399.948	-58.08	0.002	/	/	25	Pass
				2483.5	2496.5	2483.708	-53.03	0.005	/	/	25	Pass
				2496.5	12500	3307.5	-41.85	0.065	/	/	2.5	Pass
$\pi/4$ DQPSK	SISO	2402	1	30	2387	110.5	-52.24	0.006	/	/	2.5	Pass
				2387	2400	2399.987	-34.33	0.369	/	/	25	Pass
				2483.5	2496.5	2489.272	-58.53	0.001	/	/	25	Pass
				2496.5	12500	3203.5	-42.34	0.058	/	/	2.5	Pass
		2480	1	30	2387	111	-52.36	0.006	/	/	2.5	Pass
				2387	2400	2396.802	-56.08	0.002	/	/	25	Pass
				2483.5	2496.5	2484.189	-52.81	0.005	/	/	25	Pass
				2496.5	12500	3307.5	-41.87	0.065	/	/	2.5	Pass
8DPSK	SISO	2402	1	30	2387	111	-51.78	0.007	/	/	2.5	Pass
				2387	2400	2399.987	-33.46	0.451	/	/	25	Pass
				2483.5	2496.5	2493.835	-58.27	0.001	/	/	25	Pass
				2496.5	12500	3203.5	-42.30	0.059	/	/	2.5	Pass
		2480	1	30	2387	111	-51.44	0.007	/	/	2.5	Pass
				2387	2400	2399.857	-56.90	0.002	/	/	25	Pass
				2483.5	2496.5	2483.591	-53.74	0.004	/	/	25	Pass
				2496.5	12500	3307.5	-42.06	0.062	/	/	2.5	Pass

6.2 Test Graph


6.2.1 TxSe_NTNV

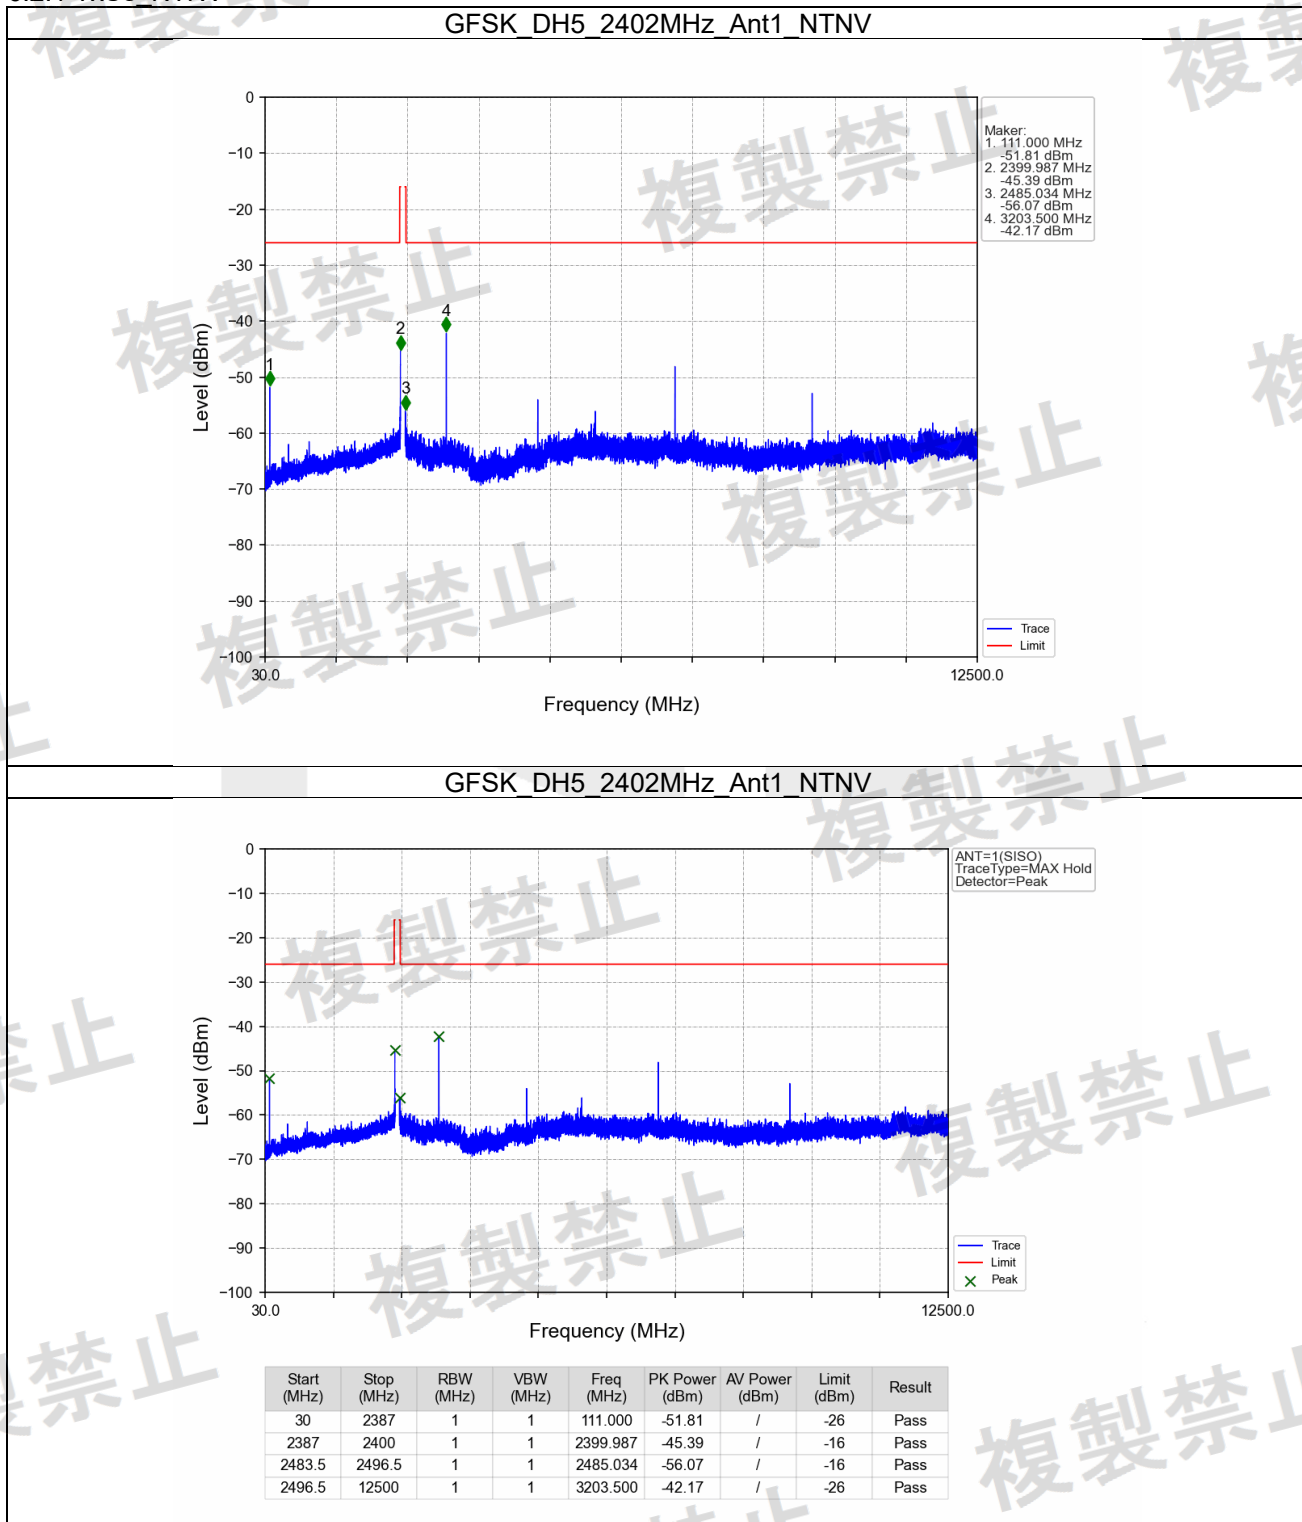

GFSK DH5_2480MHz_Ant1_NTNV

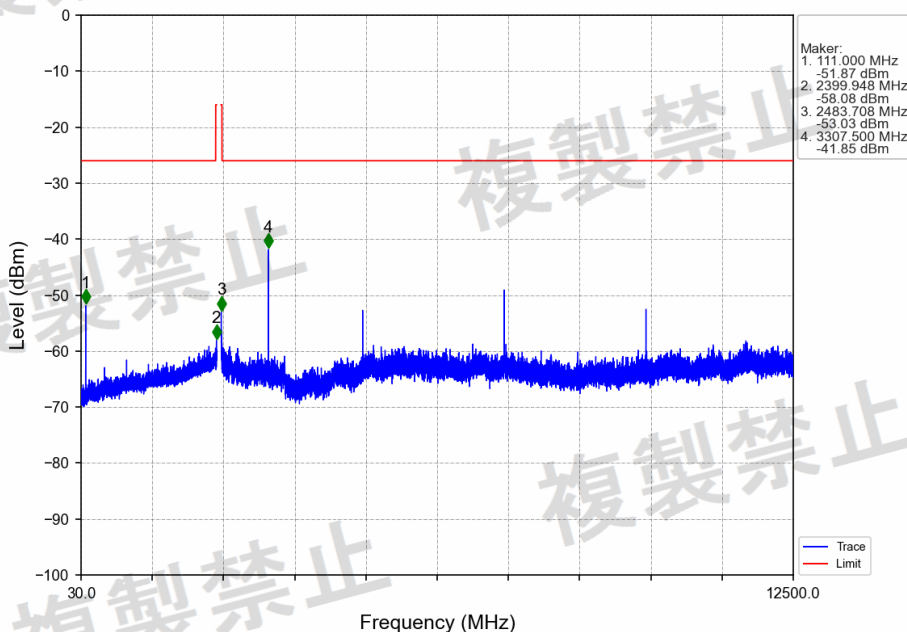


GFSK DH5_2480MHz_Ant1_NTNV

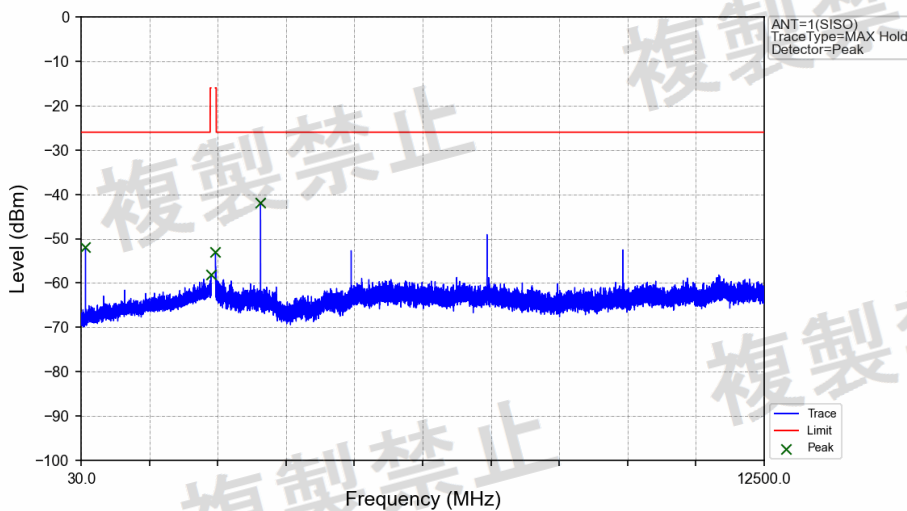


Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	2387	1	1	111.000	-51.87	/	-26	Pass
2387	2400	1	1	2399.948	-58.08	/	-16	Pass
2483.5	2496.5	1	1	2483.708	-53.03	/	-16	Pass
2496.5	12500	1	1	3307.500	-41.85	/	-26	Pass

$\pi/4$ DQPSK_2DH5_2402MHz_Ant1_NTNV

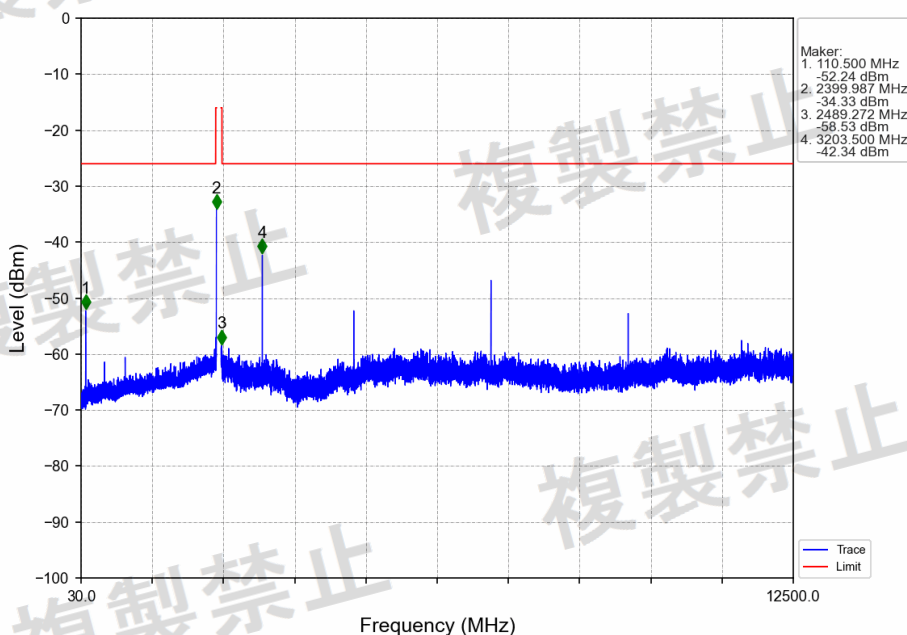


$\pi/4$ DQPSK_2DH5_2402MHz_Ant1_NTNV

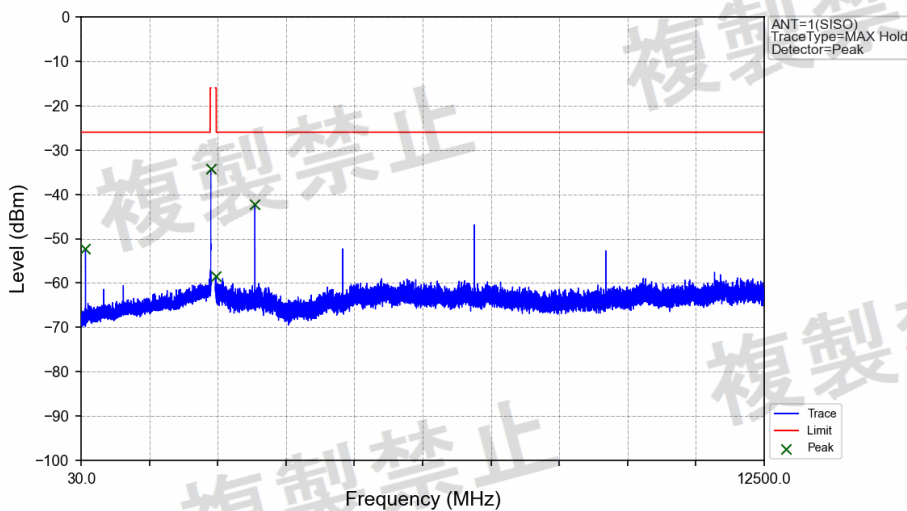


Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	2387	1	1	110.500	-52.24	/	-26	Pass
2387	2400	1	1	2399.987	-34.33	/	-16	Pass
2483.5	2496.5	1	1	2489.272	-58.53	/	-16	Pass
2496.5	12500	1	1	3203.500	-42.34	/	-26	Pass

$\pi/4$ DQPSK_2DH5_2480MHz_Ant1_NTNV

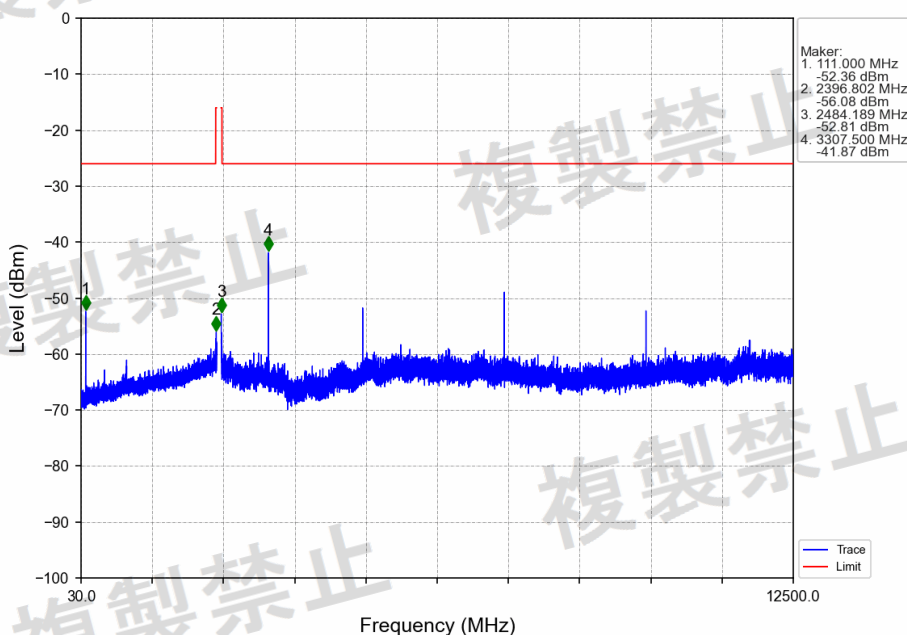


$\pi/4$ DQPSK_2DH5_2480MHz_Ant1_NTNV

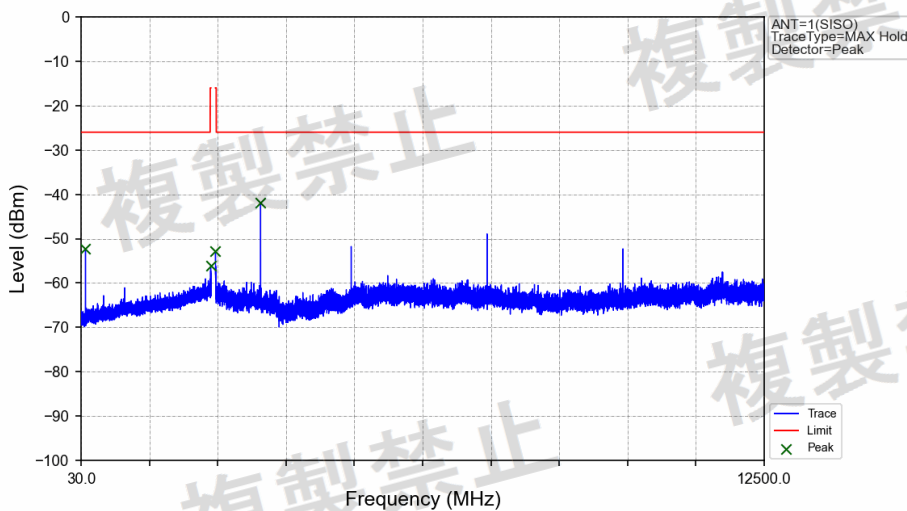


Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	2387	1	1	111.000	-52.36	/	-26	Pass
2387	2400	1	1	2396.802	-56.08	/	-16	Pass
2483.5	2496.5	1	1	2484.189	-52.81	/	-16	Pass
2496.5	12500	1	1	3307.500	-41.87	/	-26	Pass

8DPSK 3DH5 2402MHz_Ant1_NTNV

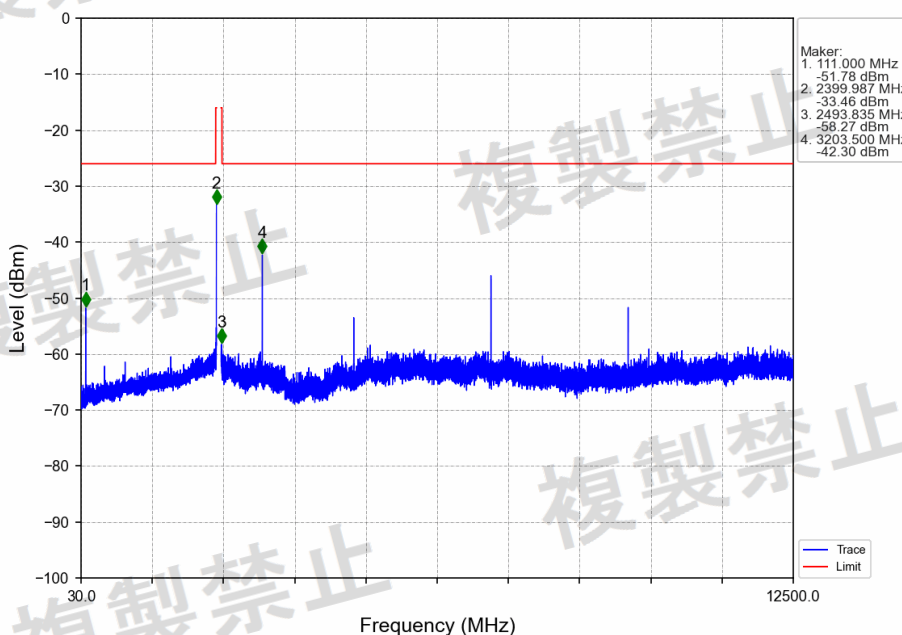


8DPSK 3DH5 2402MHz_Ant1_NTNV

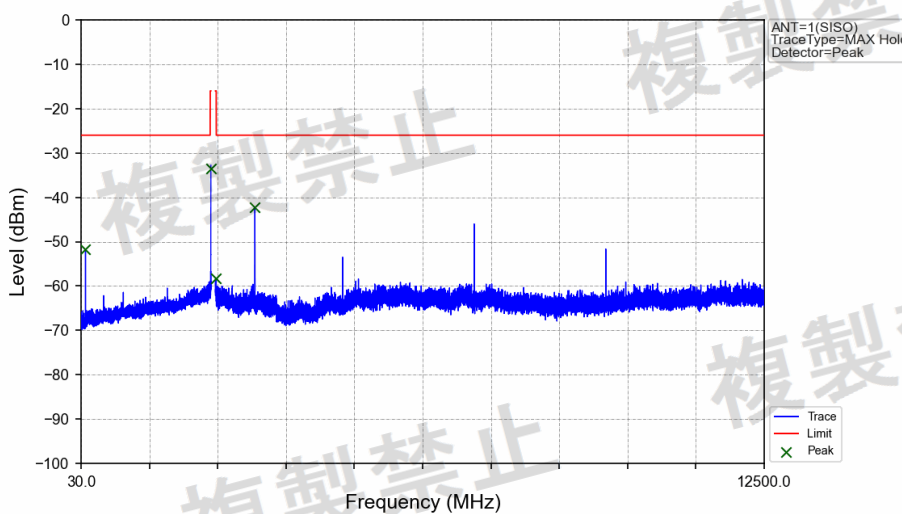


Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	2387	1	1	111.000	-51.78	/	-26	Pass
2387	2400	1	1	2399.987	-33.46	/	-16	Pass
2483.5	2496.5	1	1	2493.835	-58.27	/	-16	Pass
2496.5	12500	1	1	3203.500	-42.30	/	-26	Pass

8DPSK 3DH5 2480MHz_Ant1_NTNV

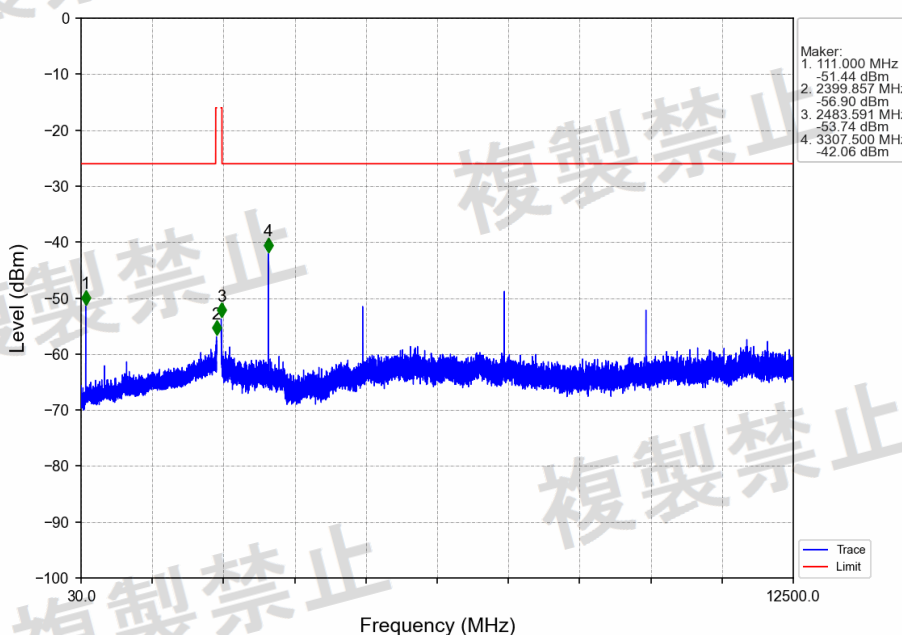

8DPSK 3DH5 2480MHz_Ant1_NTNV

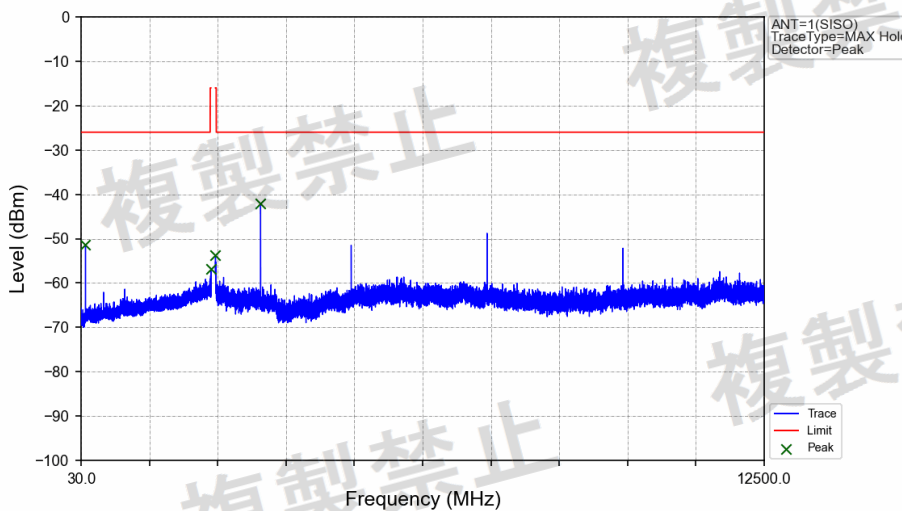

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	2387	1	1	111.000	-51.44	/	-26	Pass
2387	2400	1	1	2399.857	-56.90	/	-16	Pass
2483.5	2496.5	1	1	2483.591	-53.74	/	-16	Pass
2496.5	12500	1	1	3307.500	-42.06	/	-26	Pass


7. Secondary Radiated Emission

7.1 Test Result


7.1.1 RxSe_NTNV

NTNV												
Mode	TX Type	Freq. (MHz)	ANT	Freq. Range		Marker					Limit (nW)	Verdict
				Start (MHz)	Stop (MHz)	Freq. (MHz)	PK Power (dBm)	PK Power (nW)	AV Power (dBm)	AV Power (nW)		
GFSK	SISO	2402	1	30	1000	904.6	-65.07	0.311	/	/	4	Pass
				1000	12500	11764	-62.69	0.538	/	/	20	Pass
		2480	1	30	1000	440	-69.27	0.118	/	/	4	Pass
				1000	12500	11715	-64.14	0.385	/	/	20	Pass
$\pi/4$ DQPSK	SISO	2402	1	30	1000	440	-69.17	0.121	/	/	4	Pass
				1000	12500	12107	-63.97	0.401	/	/	20	Pass
		2480	1	30	1000	440	-69.14	0.122	/	/	4	Pass
				1000	12500	12237.5	-63.99	0.399	/	/	20	Pass
8DPSK	SISO	2402	1	30	1000	440	-69.41	0.115	/	/	4	Pass
				1000	12500	11837.5	-64.20	0.380	/	/	20	Pass
		2480	1	30	1000	440	-69.52	0.112	/	/	4	Pass
				1000	12500	11547	-63.63	0.434	/	/	20	Pass


7.2 Test Graph
7.2.1 RxSe NTN

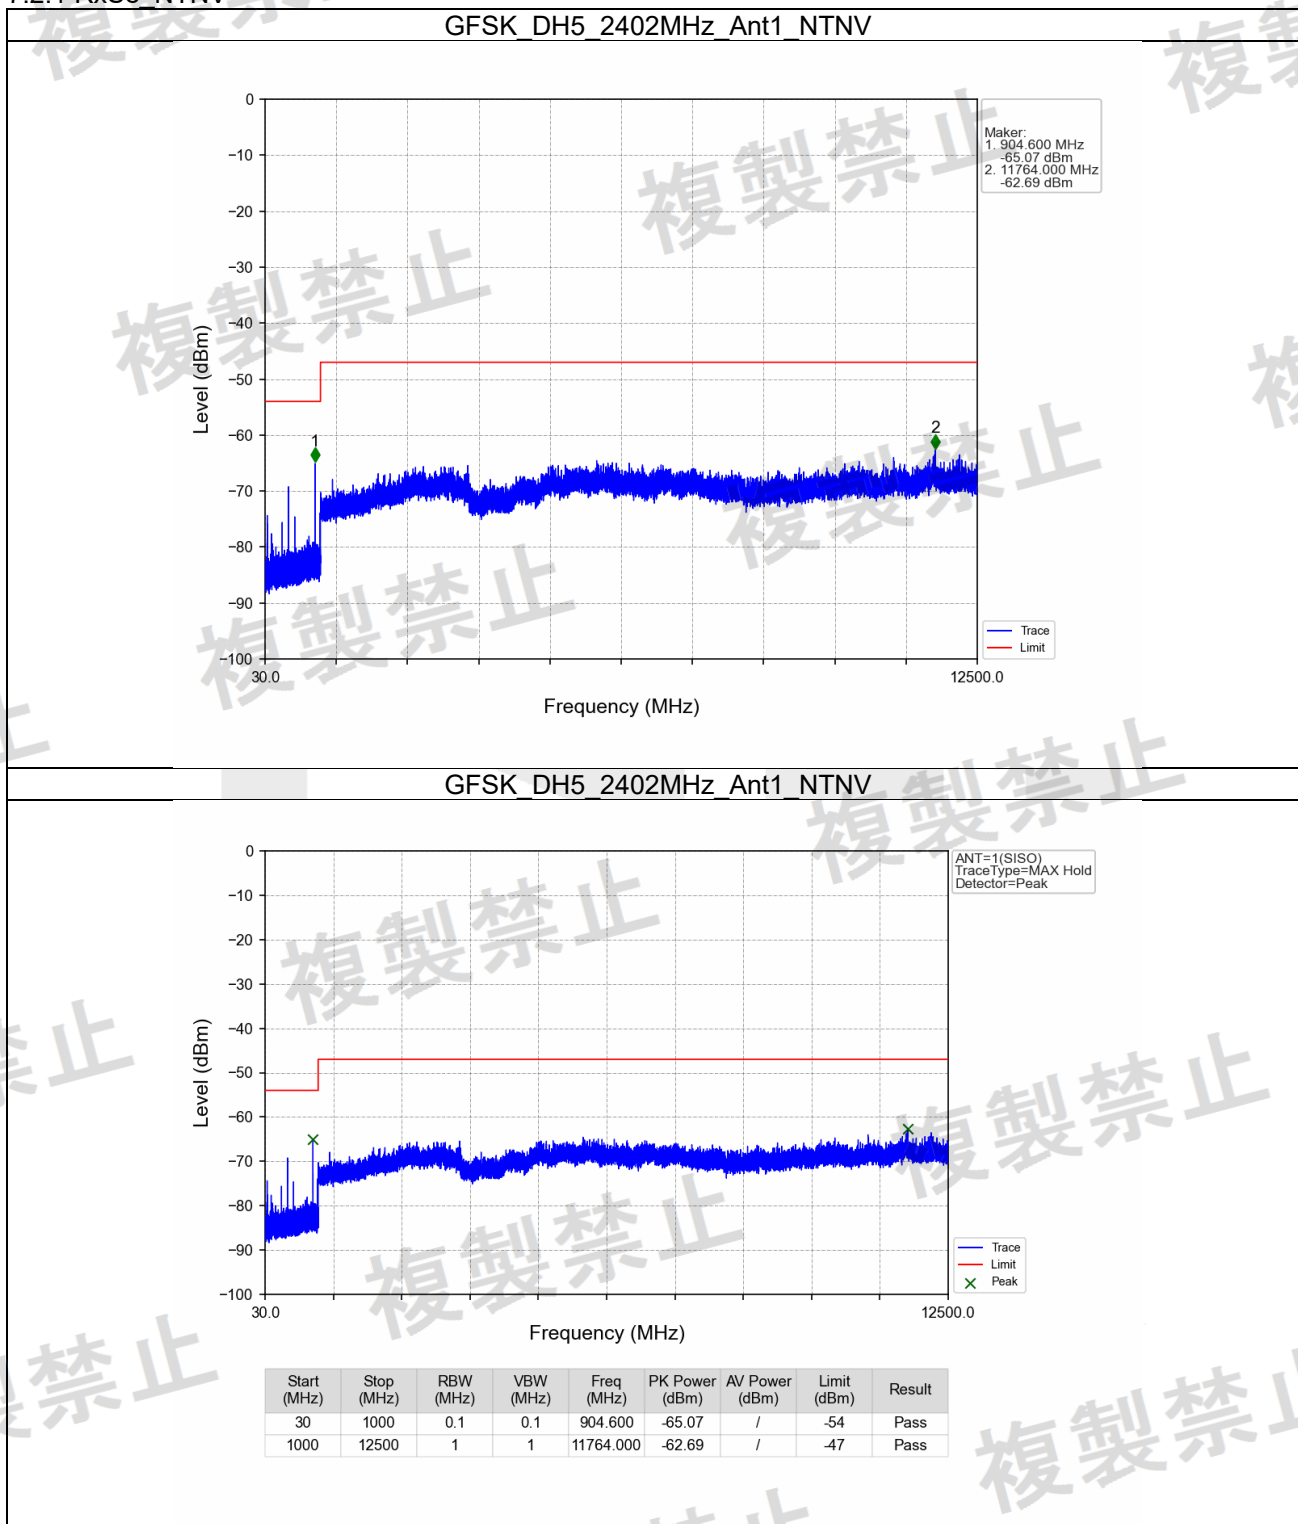

GFSK_DH5_2480MHz_Ant1_NTNV

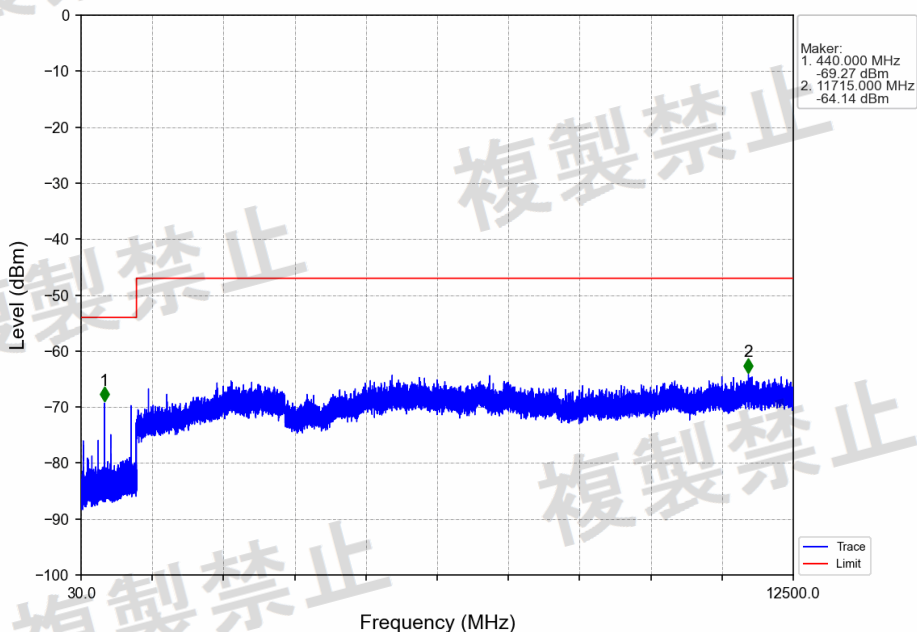


GFSK_DH5_2480MHz_Ant1_NTNV

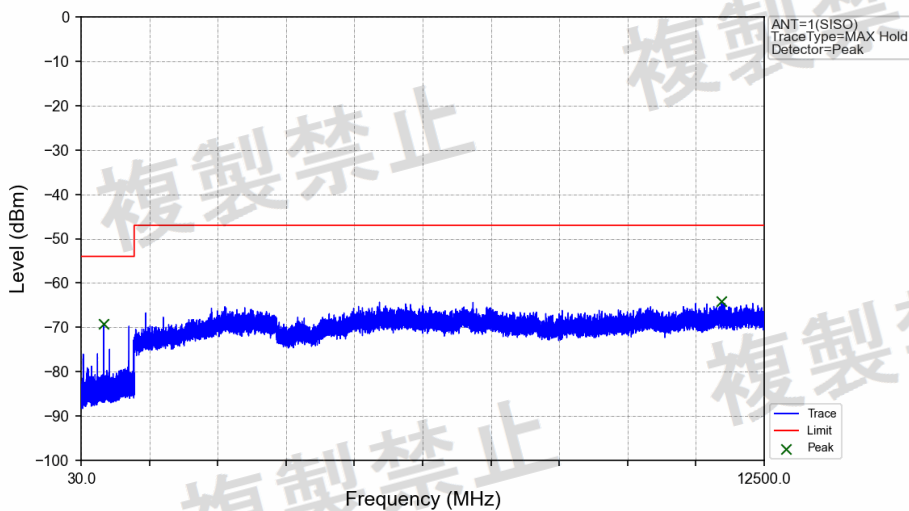


Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	1000	0.1	0.1	440.000	-69.27	/	-54	Pass
1000	12500	1	1	11715.000	-64.14	/	-47	Pass

$\pi/4$ DQPSK_2DH5_2402MHz_Ant1_NTNV

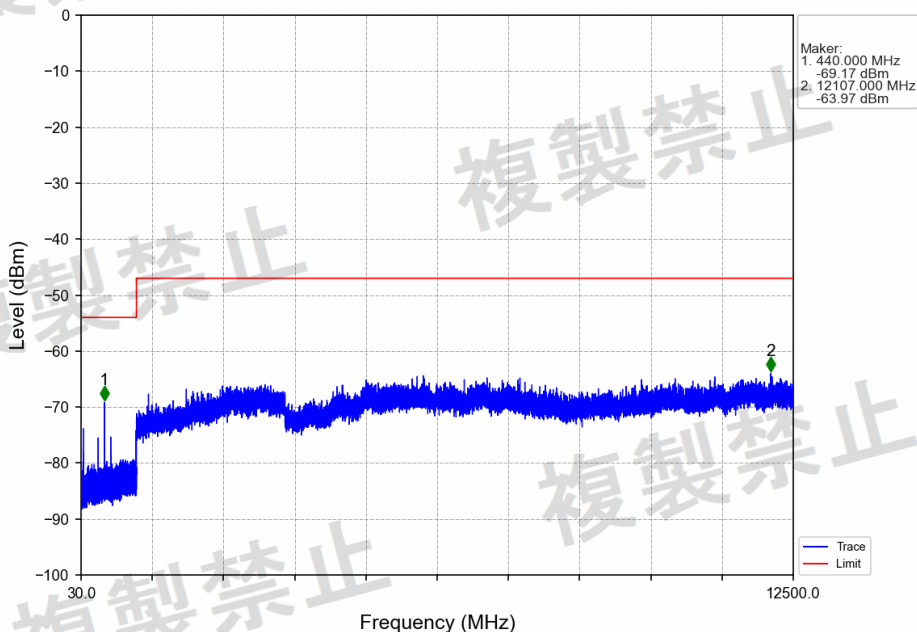


$\pi/4$ DQPSK_2DH5_2402MHz_Ant1_NTNV

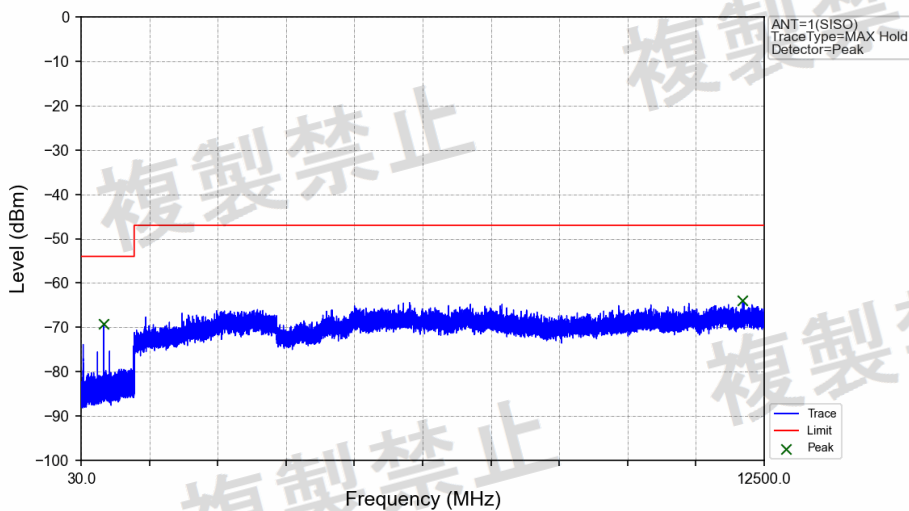


Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	1000	0.1	0.1	440.000	-69.17	/	-54	Pass
1000	12500	1	1	12107.000	-63.97	/	-47	Pass

$\pi/4$ DQPSK_2DH5_2480MHz_Ant1_NTNV

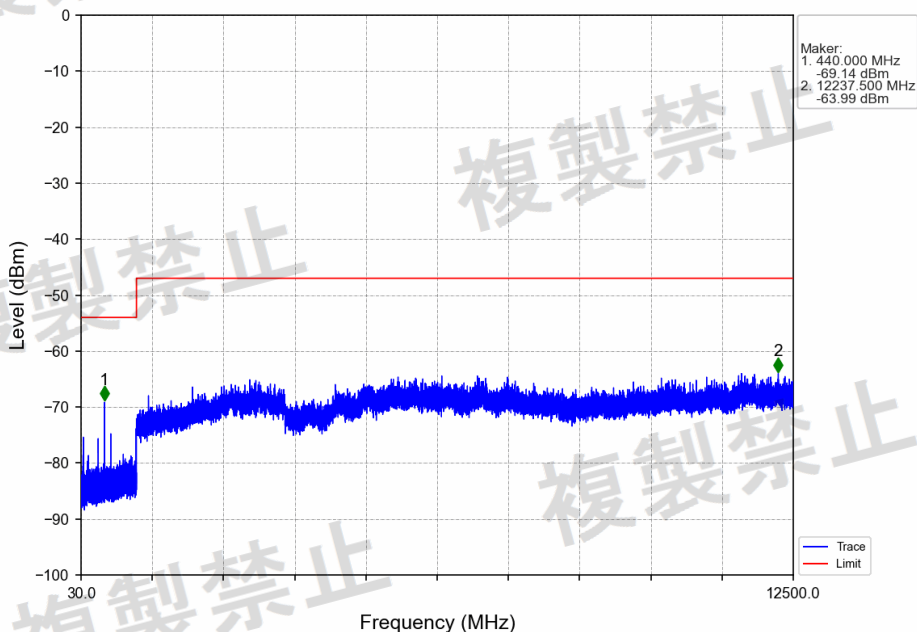


$\pi/4$ DQPSK_2DH5_2480MHz_Ant1_NTNV

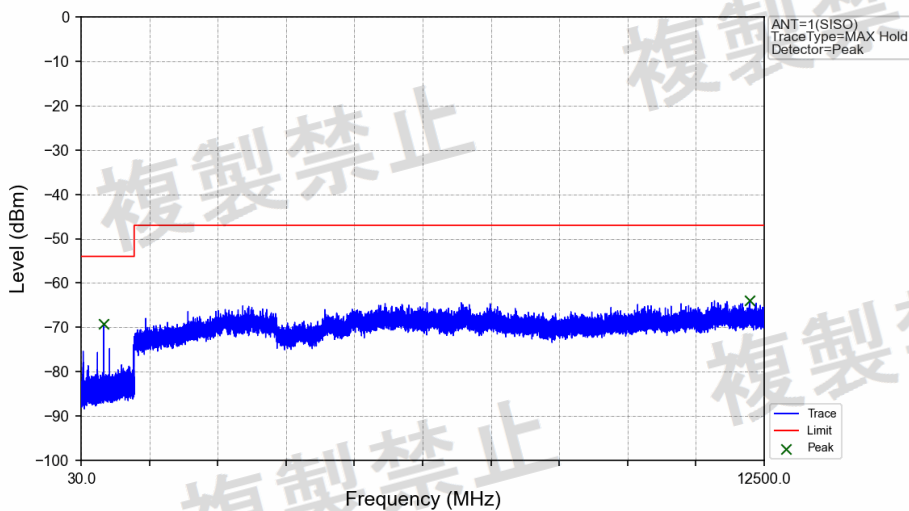


Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	1000	0.1	0.1	440.000	-69.14	/	-54	Pass
1000	12500	1	1	12237.500	-63.99	/	-47	Pass

8DPSK 3DH5_2402MHz_Ant1_NTNV

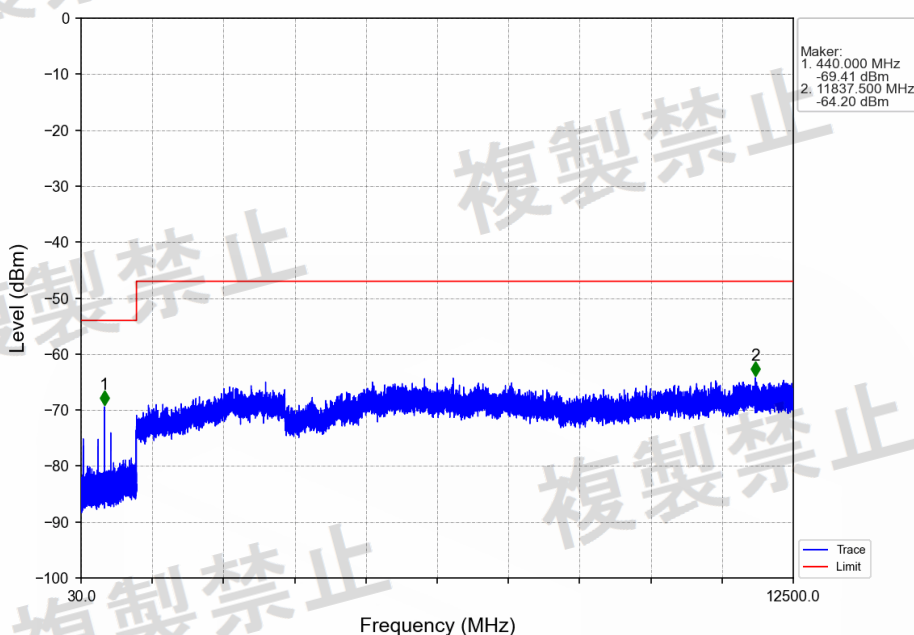


8DPSK 3DH5_2402MHz_Ant1_NTNV

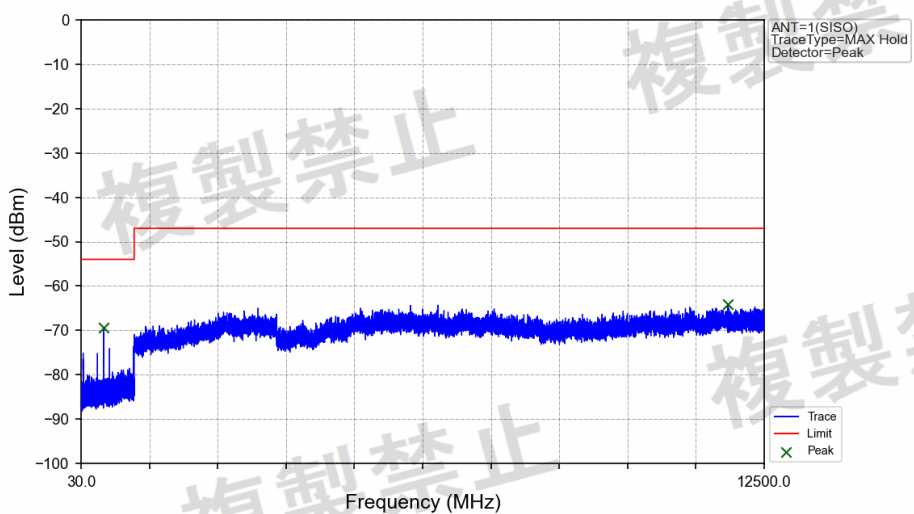


Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	1000	0.1	0.1	440.000	-69.41	/	-54	Pass
1000	12500	1	1	11837.500	-64.20	/	-47	Pass

8DPSK 3DH5_2480MHz_Ant1_NTNV

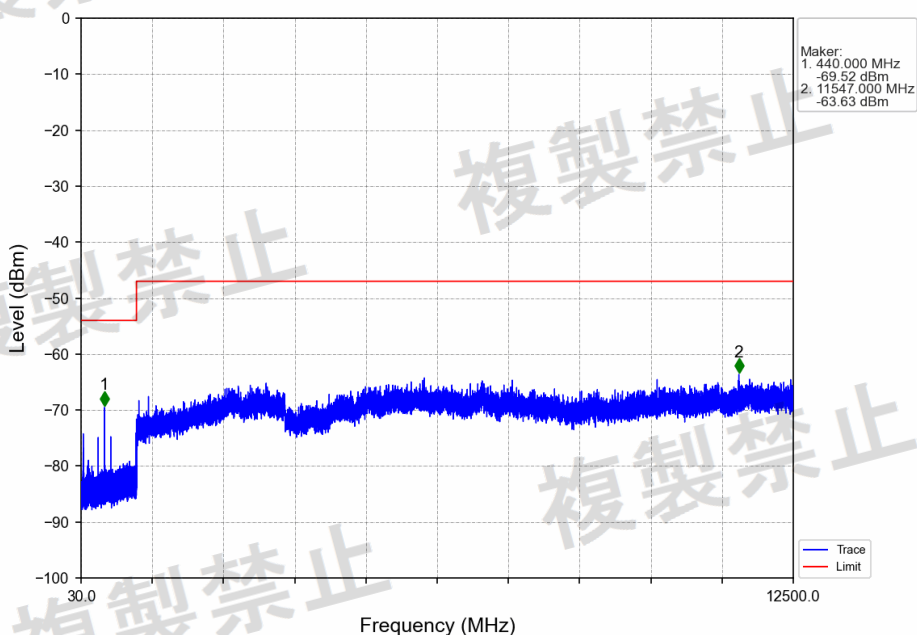

8DPSK 3DH5_2480MHz_Ant1_NTNV

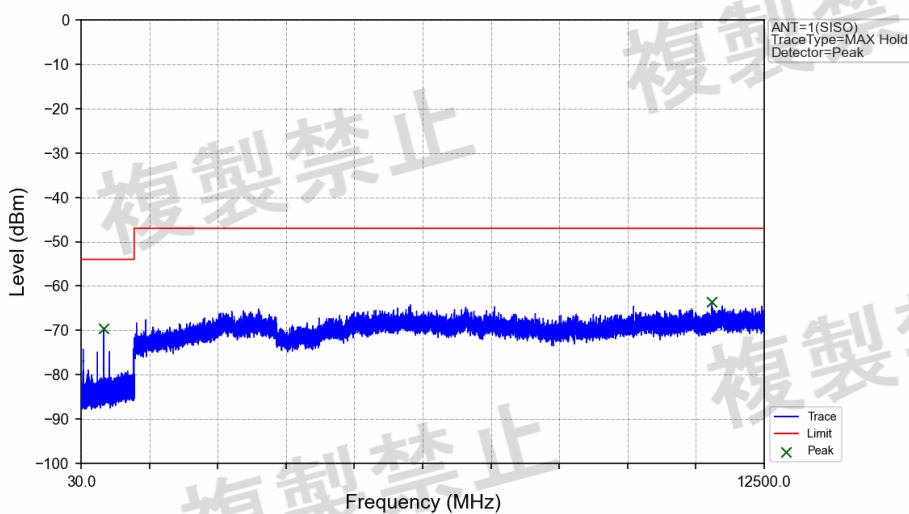

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	1000	0.1	0.1	440.000	-69.52	/	-54	Pass
1000	12500	1	1	11547.000	-63.63	/	-47	Pass

Right Ear Test Data:

1. Frequency Error


1.1 Test Result


1.1.1 Ant1


Ant1								
ENV	Mode	TX Type	Frequency (MHz)	Packet Type	Measured Frequency (MHz)	Tolerance (ppm)		Verdict
						Result	Limit	
NTNV	GFSK	SISO	2402	DH5	2402.053	22.06	-50 to 50	Pass
			2480	DH5	2480.056	22.66	-50 to 50	Pass
	$\pi/4$ DQPSK	SISO	2402	2DH5	2402.051	21.28	-50 to 50	Pass
			2480	2DH5	2480.052	20.95	-50 to 50	Pass
	8DPSK	SISO	2402	3DH5	2402.045	18.88	-50 to 50	Pass
			2480	3DH5	2480.047	18.82	-50 to 50	Pass

1.2 Test Graph

1.2.1 Ant1

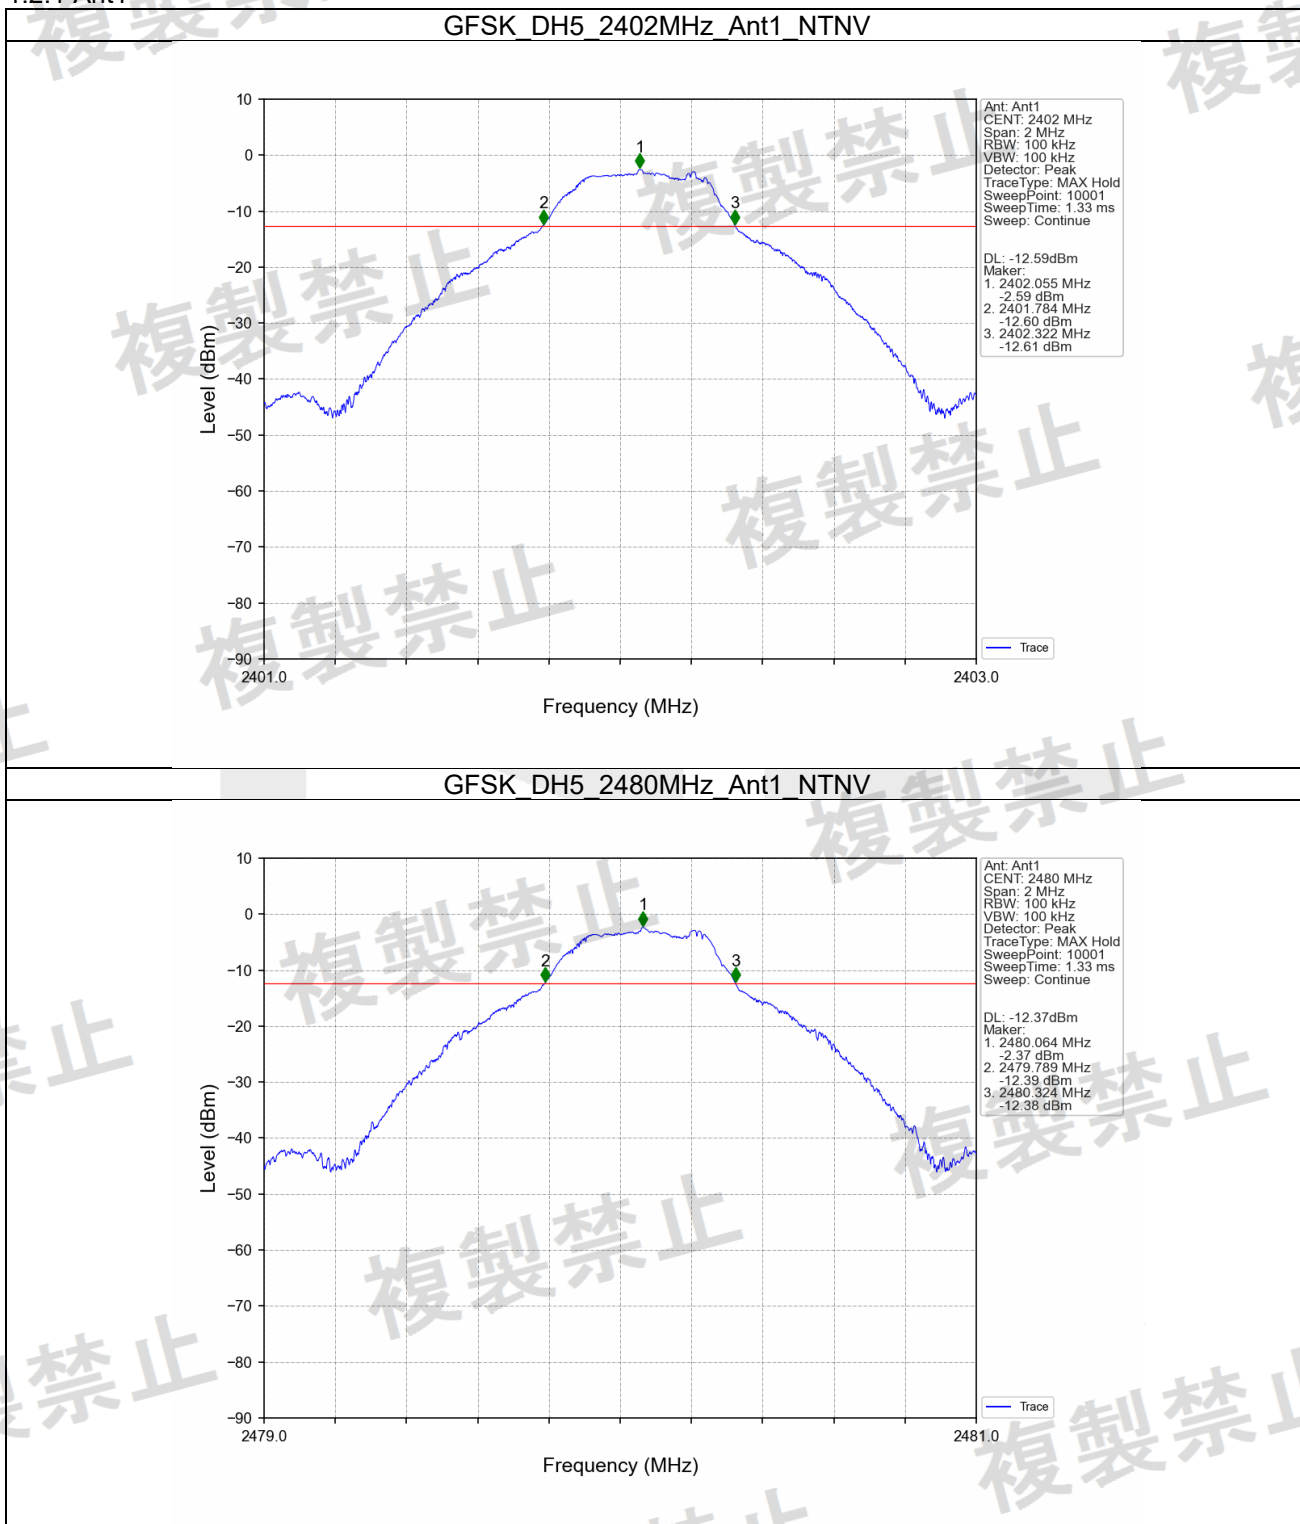

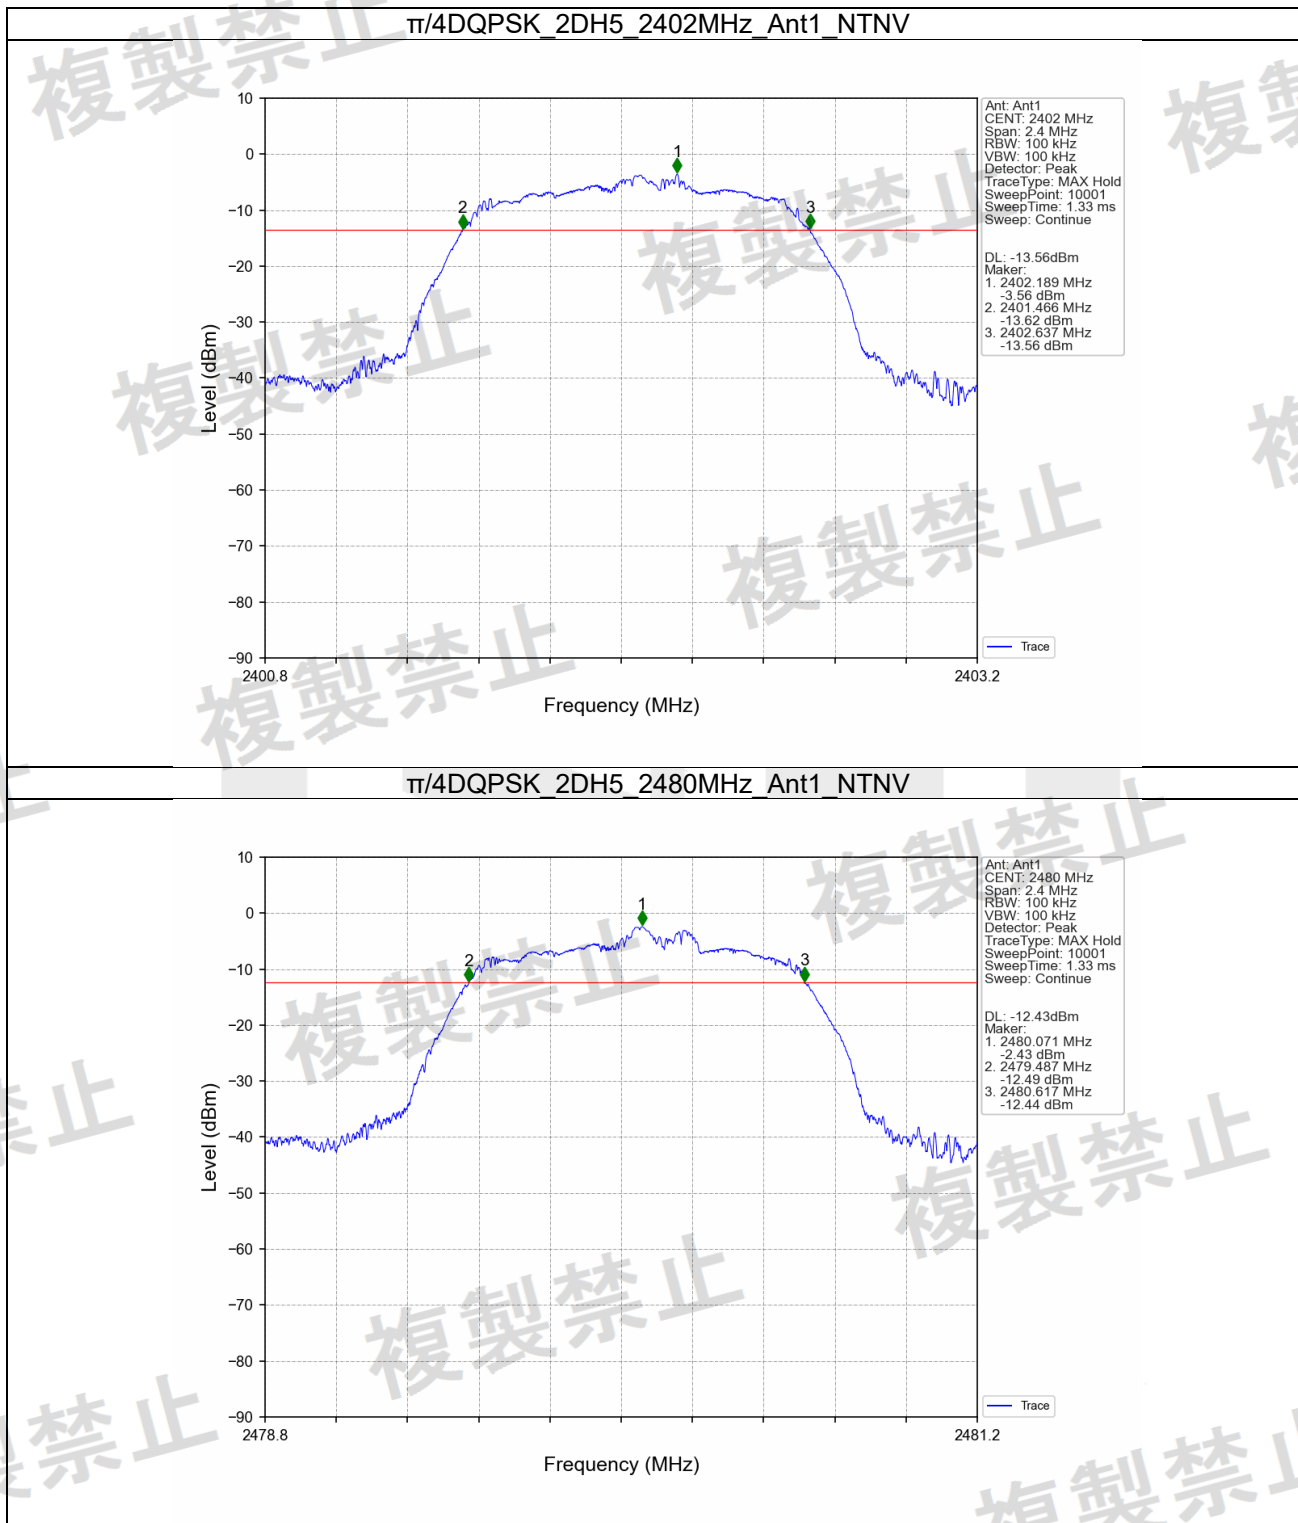

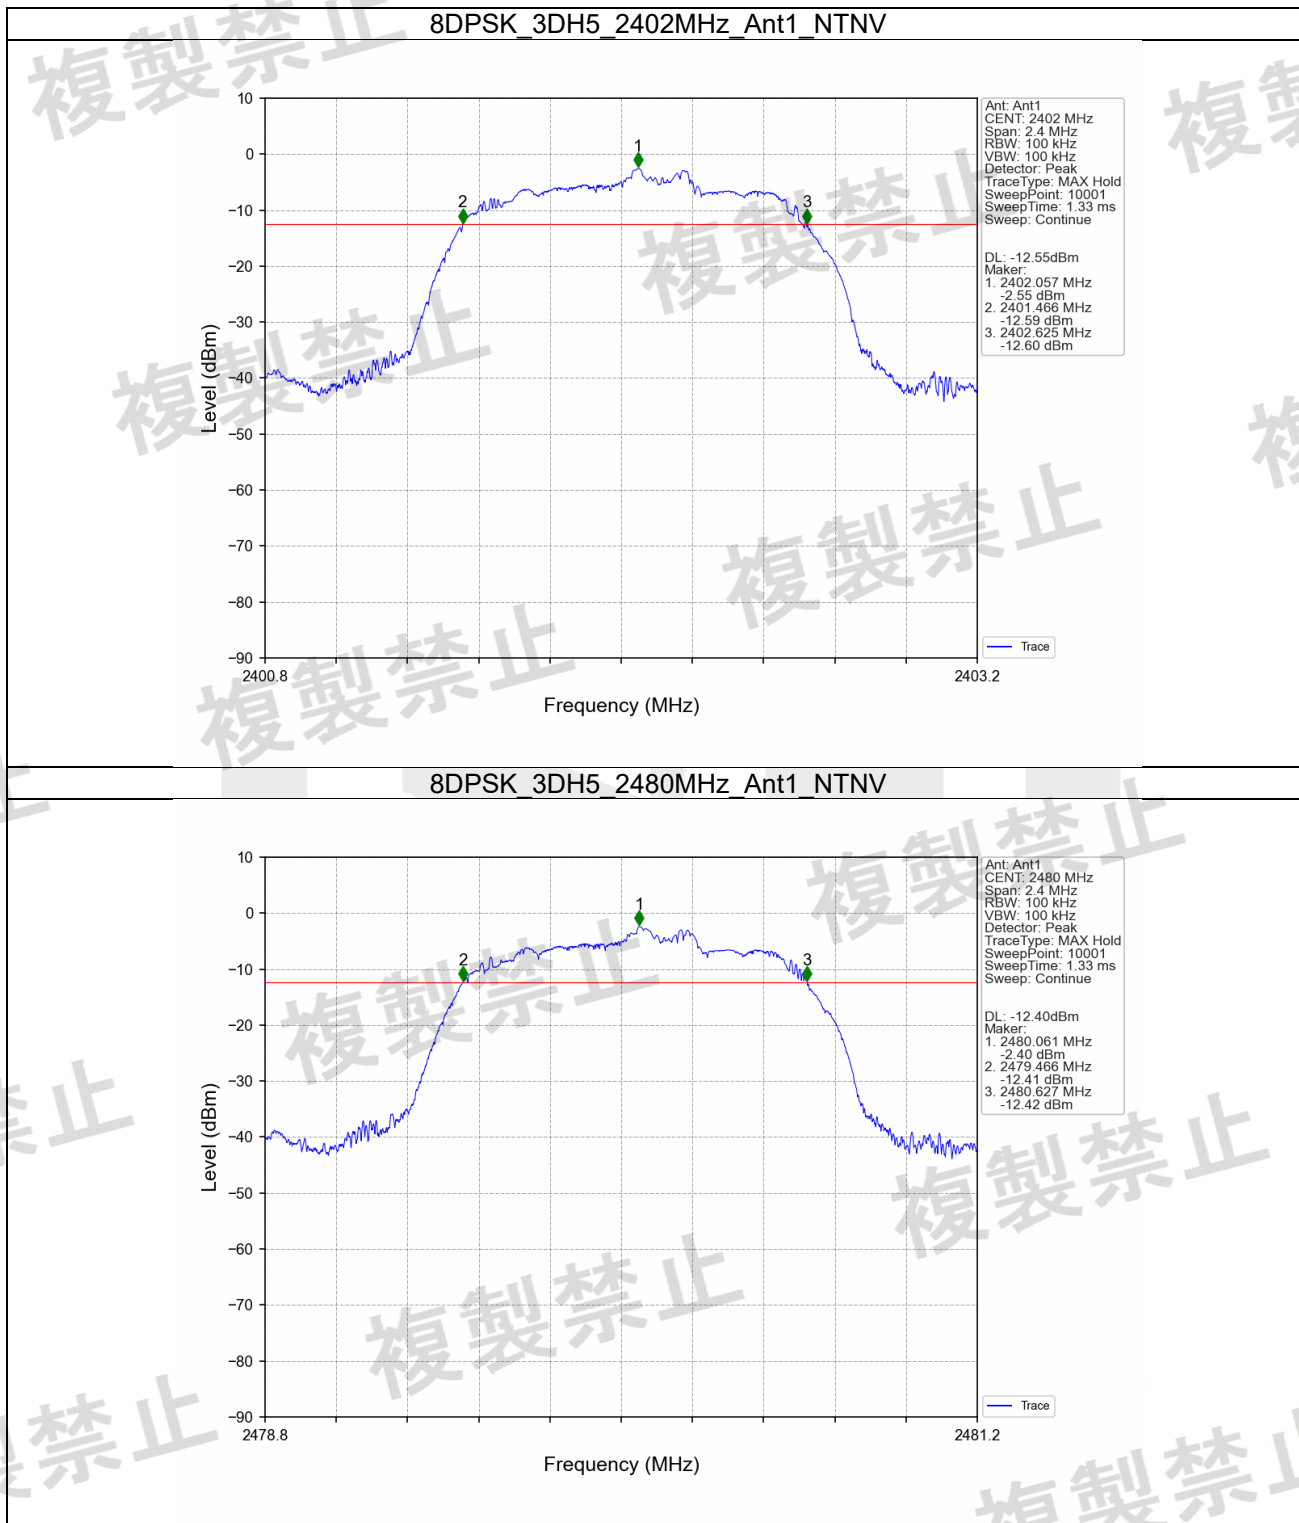

2. Occupied Bandwidth


2.1 Test Result


2.1.1 OBW

ENV	Mode	TX Type	Frequency (MHz)	Packet Type	99% Occupied Bandwidth (MHz)		Verdict
					ANT1	Limit	
NTNV	GFSK	SISO	HOPP	DH5	78.788	≤ 83.5	Pass
	$\pi/4$ DQPSK	SISO	HOPP	2DH5	78.838	≤ 83.5	Pass
	8DPSK	SISO	HOPP	3DH5	78.848	≤ 83.5	Pass

2.2 Test Graph

2.2.1 OBW

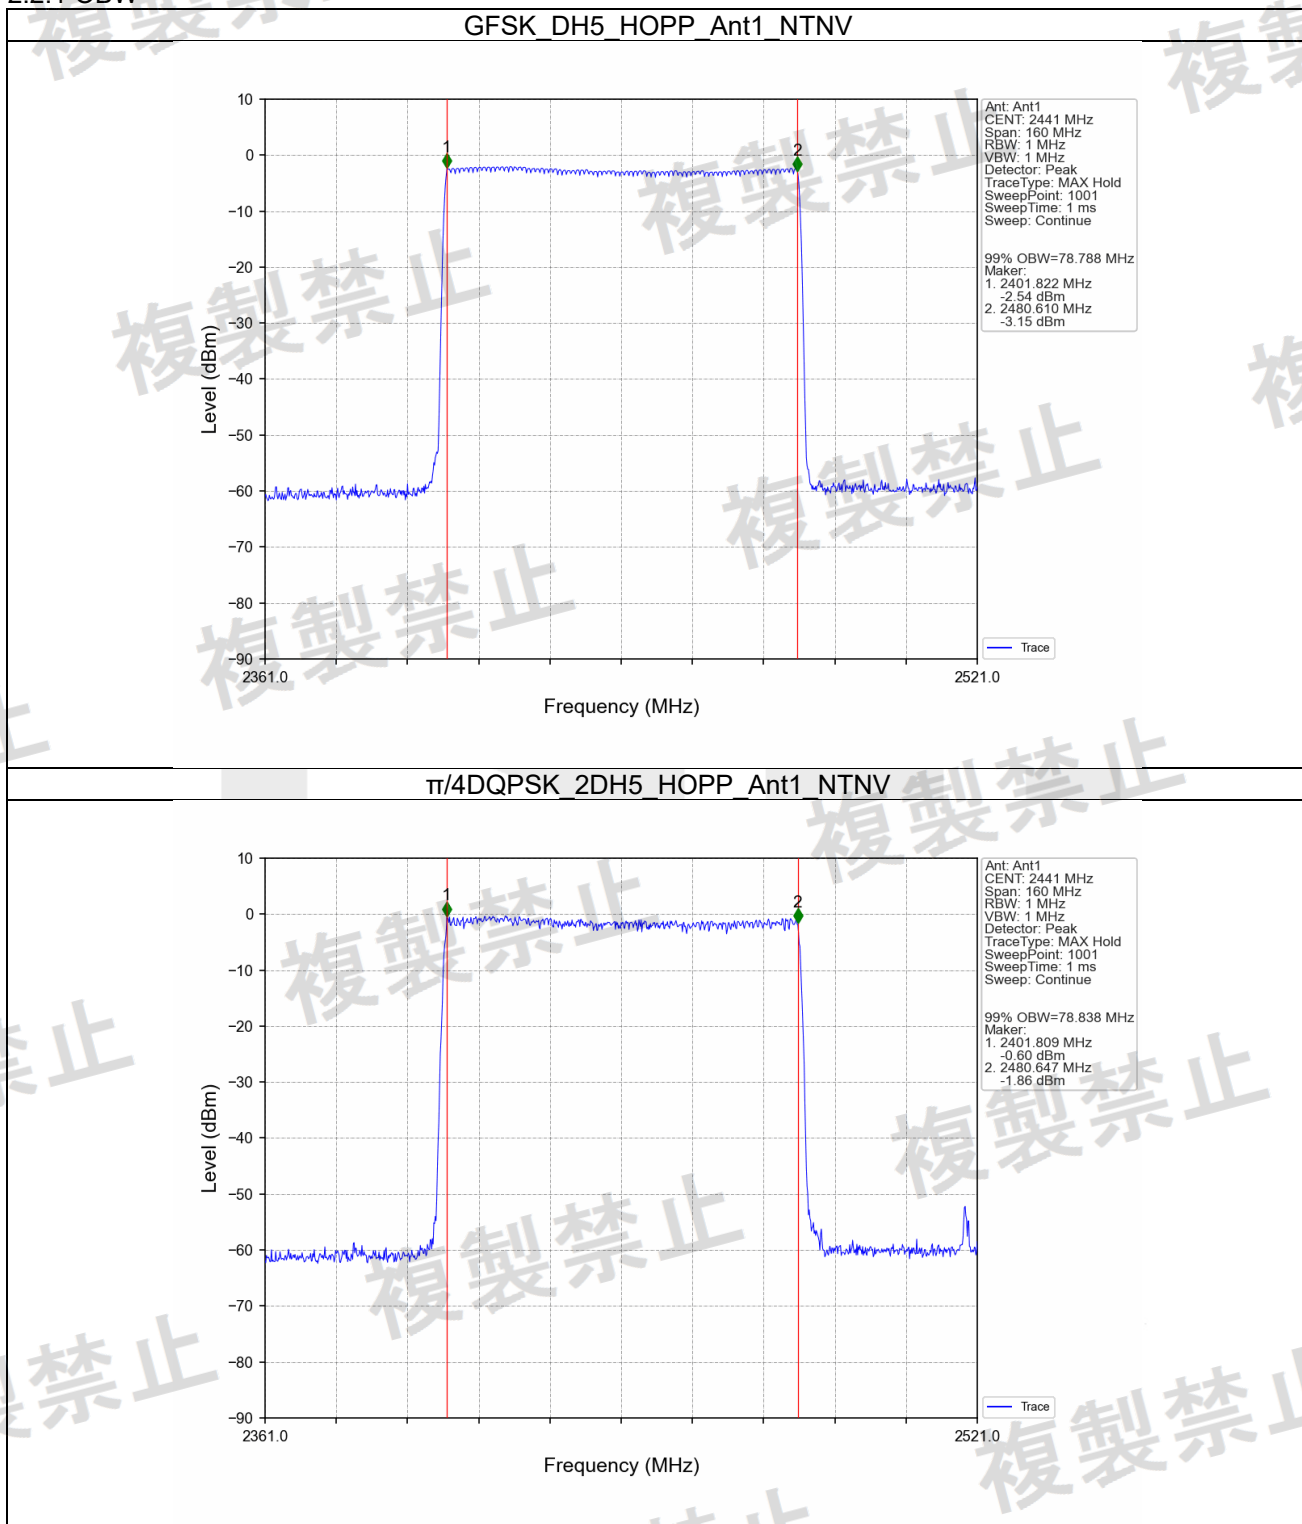

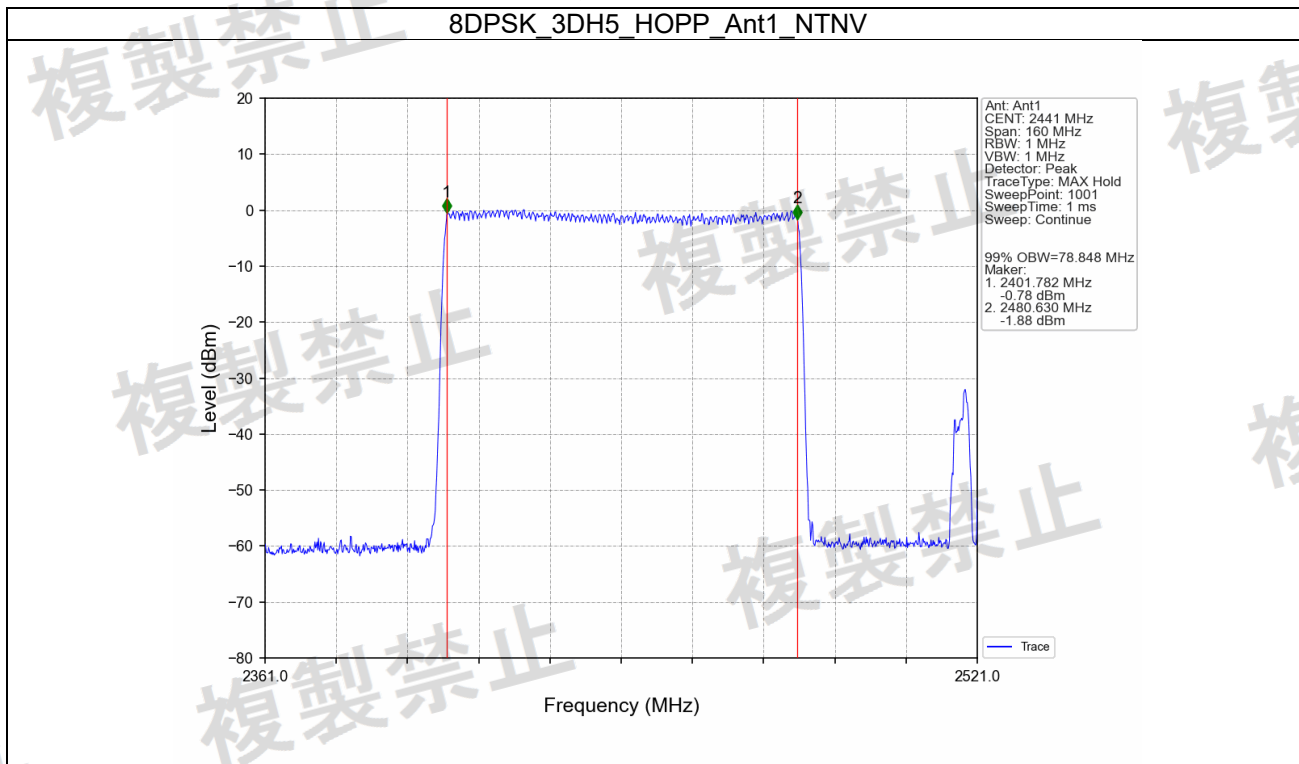

3. Spread Bandwidth


3.1 Test Result


3.1.1 SPBW

ENV	Mode	TX Type	Frequency (MHz)	Packet Type	Spread Bandwidth (MHz)		Verdict
					ANT1	Limit	
NTNV	GFSK	SISO	HOPP	DH5	71.980	/	Only For Report
	$\pi/4$ DQPSK	SISO	HOPP	2DH5	71.986	/	Only For Report
	8DPSK	SISO	HOPP	3DH5	72.106	/	Only For Report

3.2 Test Graph

3.2.1 SPBW

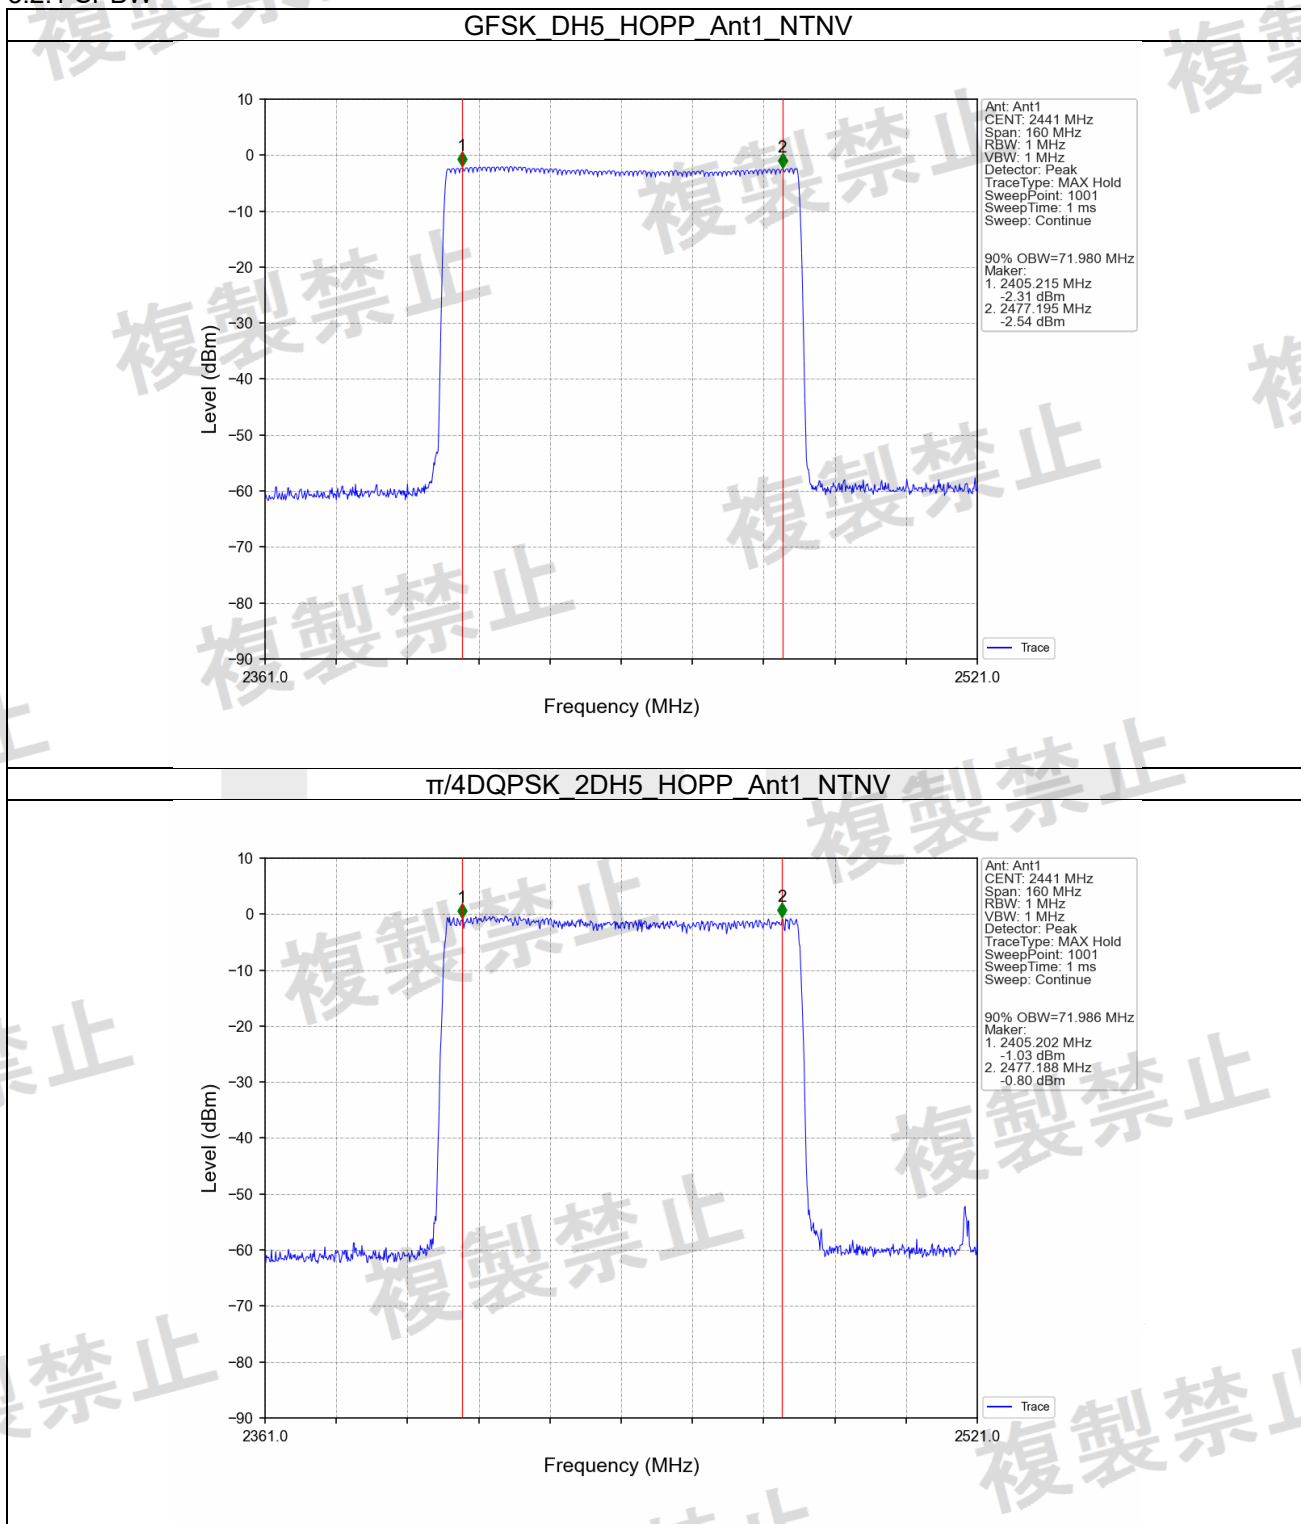

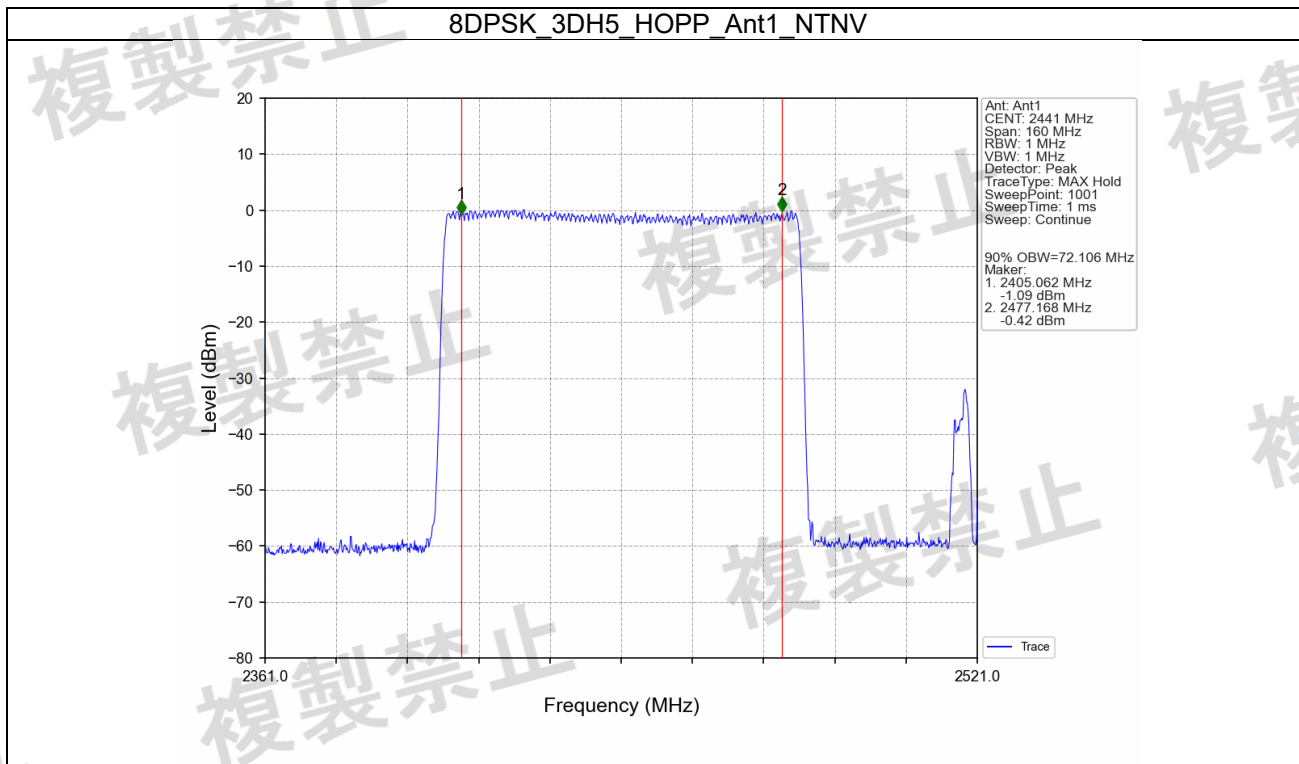

4. Antenna Power

4.1 Test Result

4.1.1 Power

ENV	Mode	TX Type	Frequency (MHz)	Packet Type	Total power (mW)			Antenna Power Density PD (mW / MHz)	Nominal Power (mW/MHz)	Tolerance (%)		Limit (mW/ MHz)	Verdict
					dBm	mW	Spread Bandwidth (MHz)			Measured	Limit		
NTNV	GFSK	SISO	HOPP	DH5	7.53	5.662	71.980	0.079	0.100	-21.00	20	3	Pass
	$\pi/4$ DQPSK	SISO	HOPP	2DH5	7.29	5.358	71.986	0.074	0.100	-26.00	20	3	Pass
	8DPSK	SISO	HOPP	3DH5	7.21	5.260	72.106	0.073	0.100	-27.00	20	3	Pass

Note:

1. Antenna Power Density PD = Total power (mW) / Spread Spectrum Bandwidth MHz.

4.1.2 EIRP

ENV	Mode	TX Type	Frequency (MHz)	ANT	Gain (dBi)	Measured Power (dBm/MHz)	EIRP (dBm/MHz)		Verdict
							Result	Limit	
NTNV	GFSK	SISO	HOPP	1	2.50	-11.02	-8.52	12.14	Pass
	$\pi/4$ DQPSK	SISO	HOPP	1	2.50	-11.31	-8.81	12.14	Pass
	8DPSK	SISO	HOPP	1	2.50	-11.37	-8.87	12.14	Pass


Note: E.I.R.P = Measured Power + Antenna Gain

5. Dwell Time
5.1 Test Result
5.1.1 Ant1


Ant1											
ENV	Mode	TX Type	Frequency (MHz)	Packet Type	Spreading Rate	T_on (ms)	Period (ms)	Hopp Number	Dwell Time (ms)		Verdict
									Result	Limit	
NTNV	GFSK	SISO	2402	DH1	71.980	0.379	1.250	79	110.503	<=400	Pass
				DH3	71.980	1.634	2.500	79	238.208	<=400	Pass
				DH5	71.980	2.883	3.750	79	280.194	<=400	Pass
			2480	DH1	71.980	0.378	1.250	79	110.211	<=400	Pass
				DH3	71.980	1.634	2.500	79	238.208	<=400	Pass
				DH5	71.980	2.883	3.750	79	280.194	<=400	Pass
	$\pi/4$ DQPSK	SISO	2402	2DH1	71.986	0.390	1.250	79	113.720	<=400	Pass
				2DH3	71.986	1.632	2.500	79	237.937	<=400	Pass
				2DH5	71.986	2.886	3.749	79	280.583	<=400	Pass
			2480	2DH1	71.986	0.390	1.250	79	113.720	<=400	Pass
				2DH3	71.986	1.632	2.500	79	237.937	<=400	Pass
				2DH5	71.986	2.880	3.750	79	279.925	<=400	Pass
	8DPSK	SISO	2402	3DH1	72.106	0.385	1.250	79	112.449	<=400	Pass
				3DH3	72.106	1.642	2.500	79	239.794	<=400	Pass
				3DH5	72.106	2.887	3.750	79	281.073	<=400	Pass
			2480	3DH1	72.106	0.386	1.250	79	112.741	<=400	Pass
				3DH3	72.106	1.631	2.500	79	238.187	<=400	Pass
				3DH5	72.106	2.882	3.750	79	280.587	<=400	Pass

5.2 Test Graph


5.2.1 Ant1

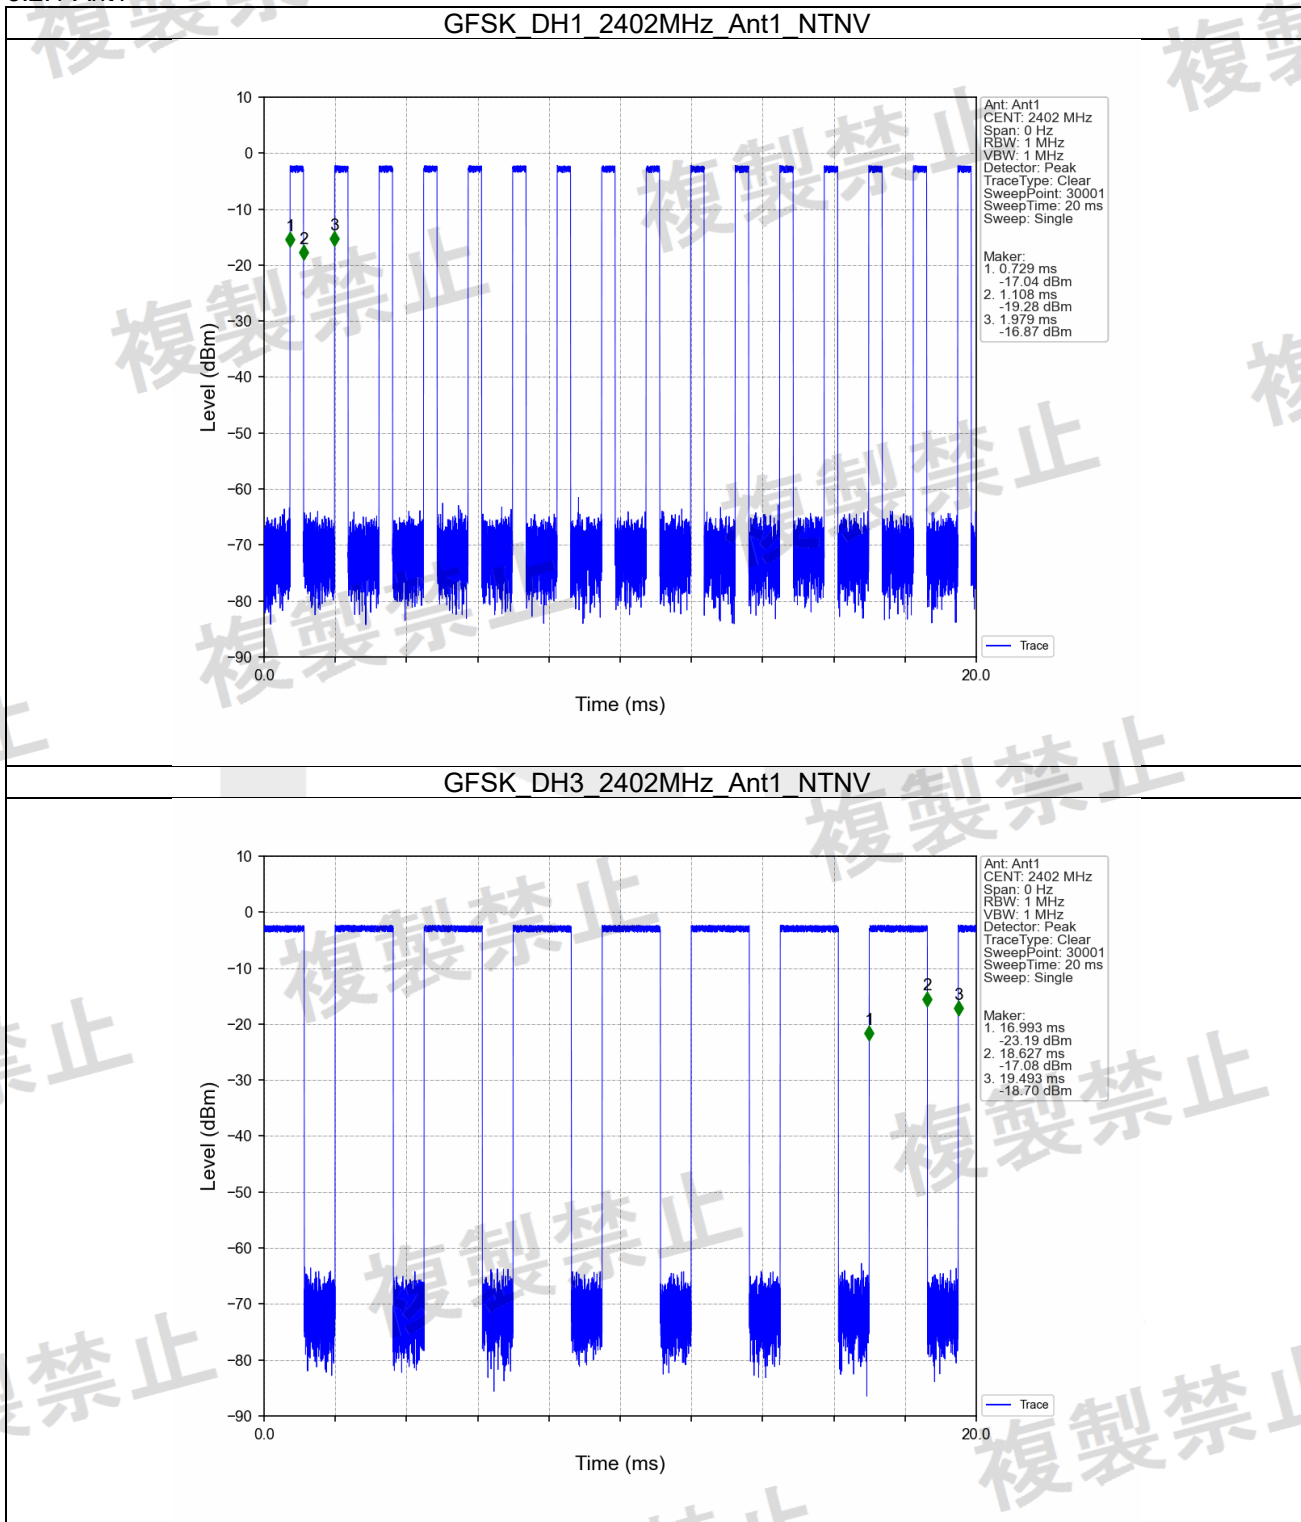


GFSK DH5_2402MHz_Ant1_NTNV

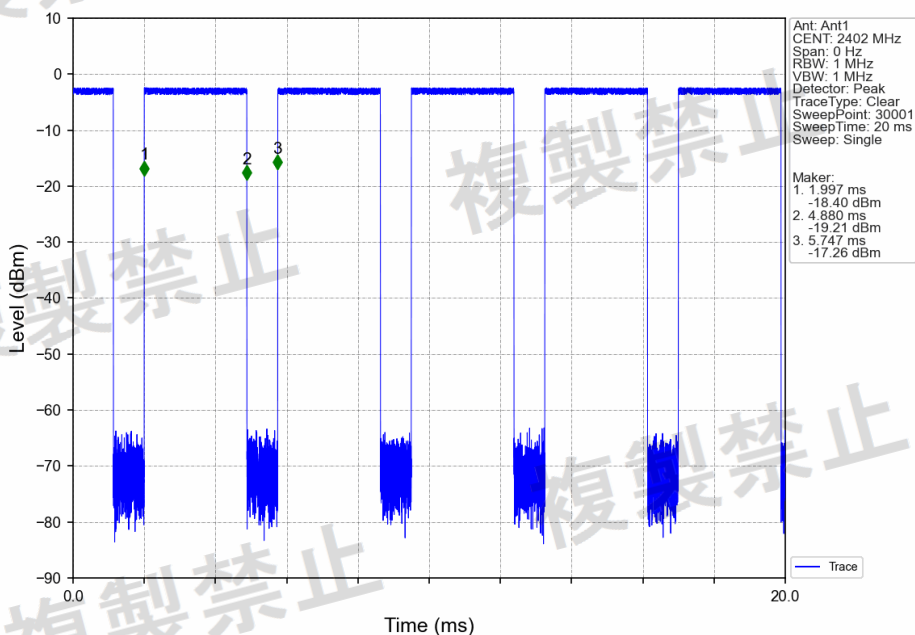


GFSK DH1_2480MHz_Ant1_NTNV

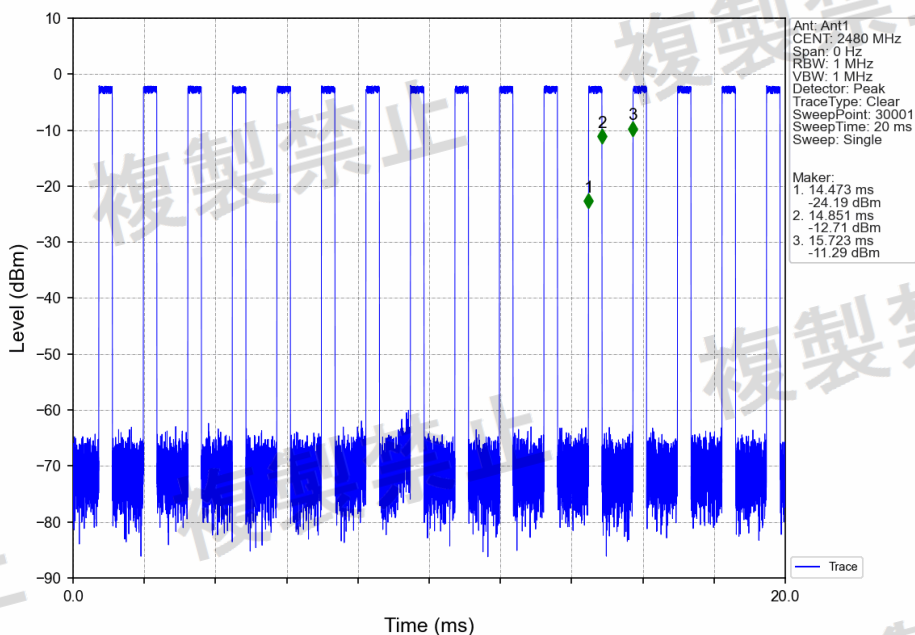



GFSK DH3_2480MHz_Ant1_NTNV

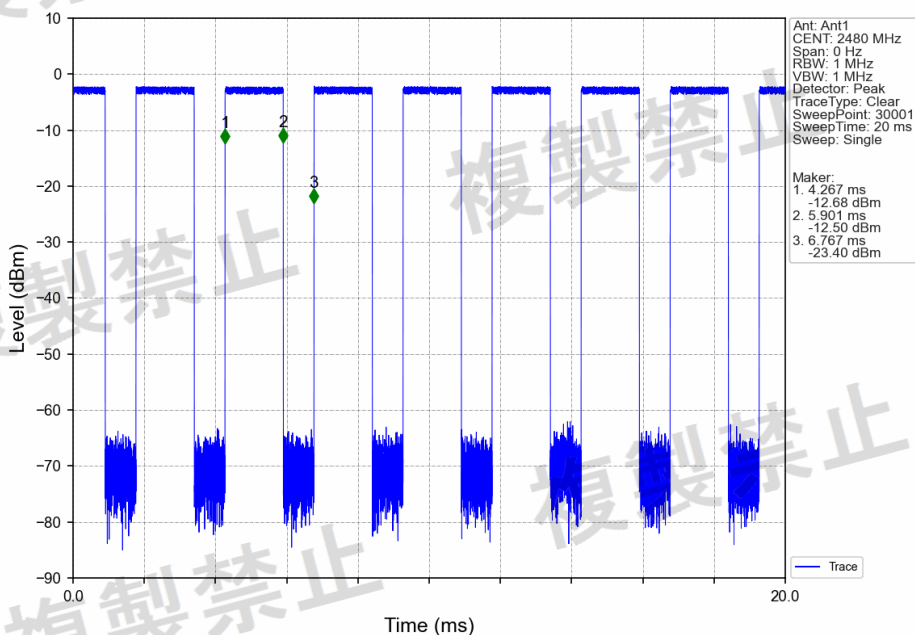


GFSK DH5_2480MHz_Ant1_NTNV

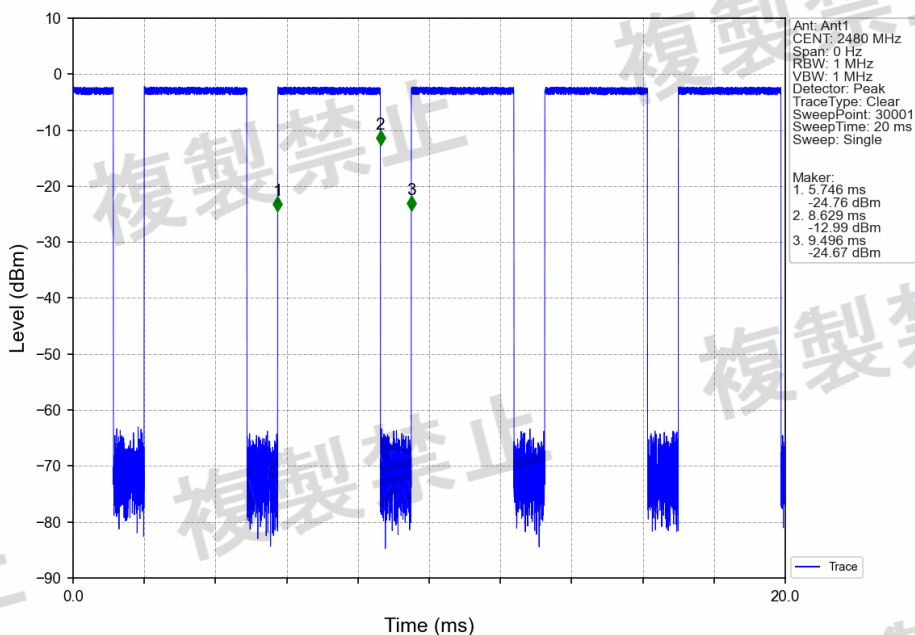

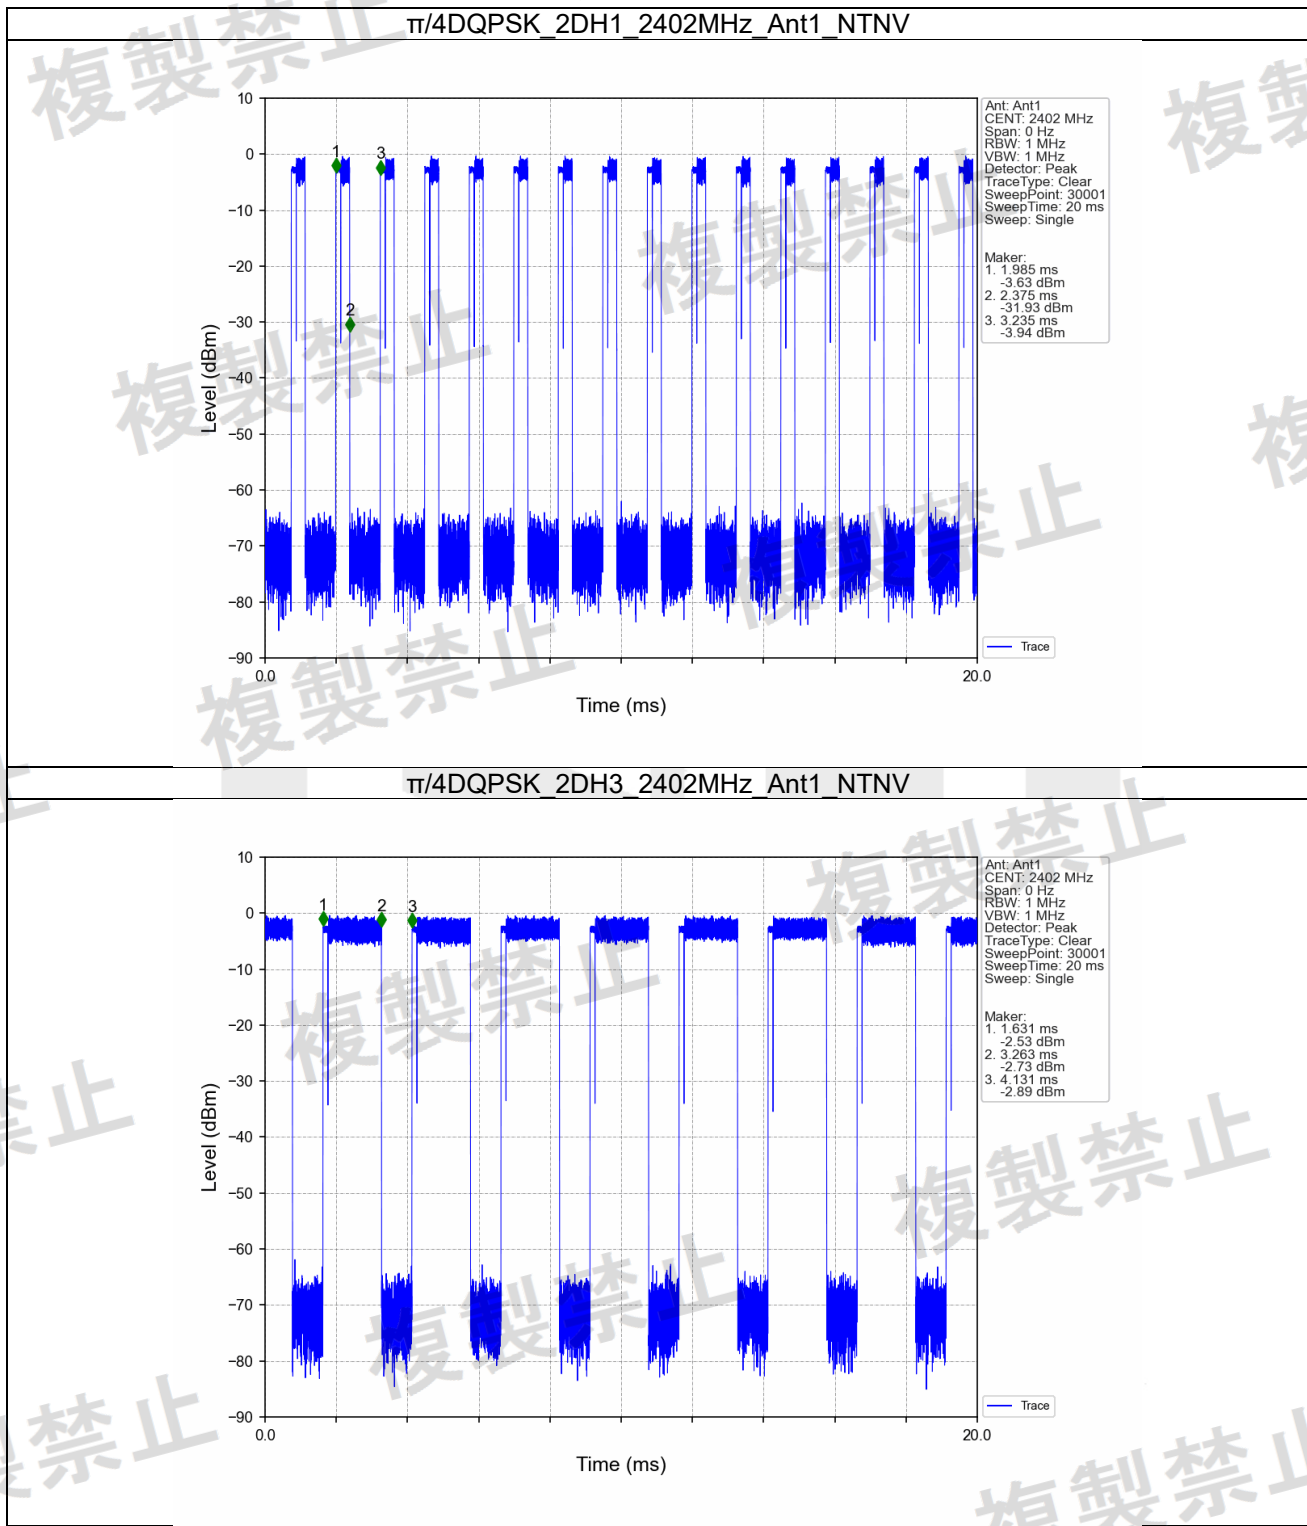


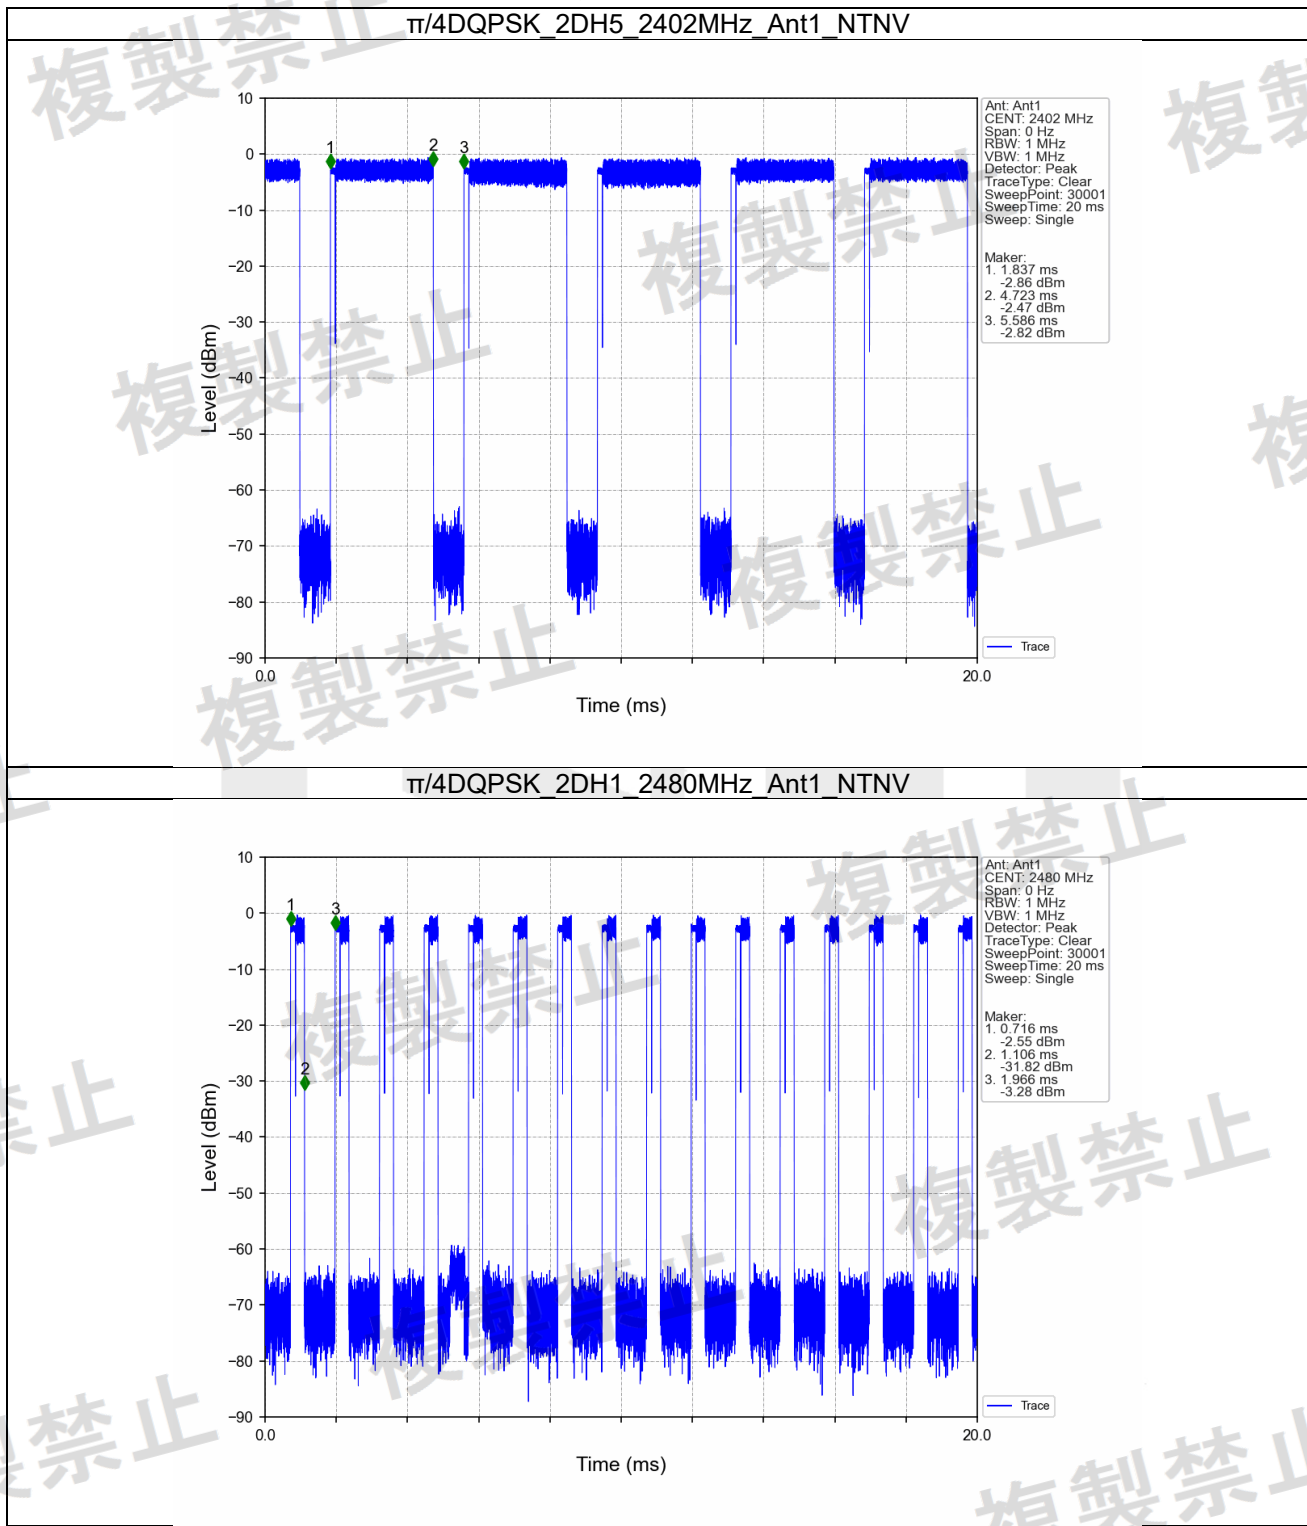


$\pi/4$ DQPSK_2DH3_2480MHz_Ant1_NTNV

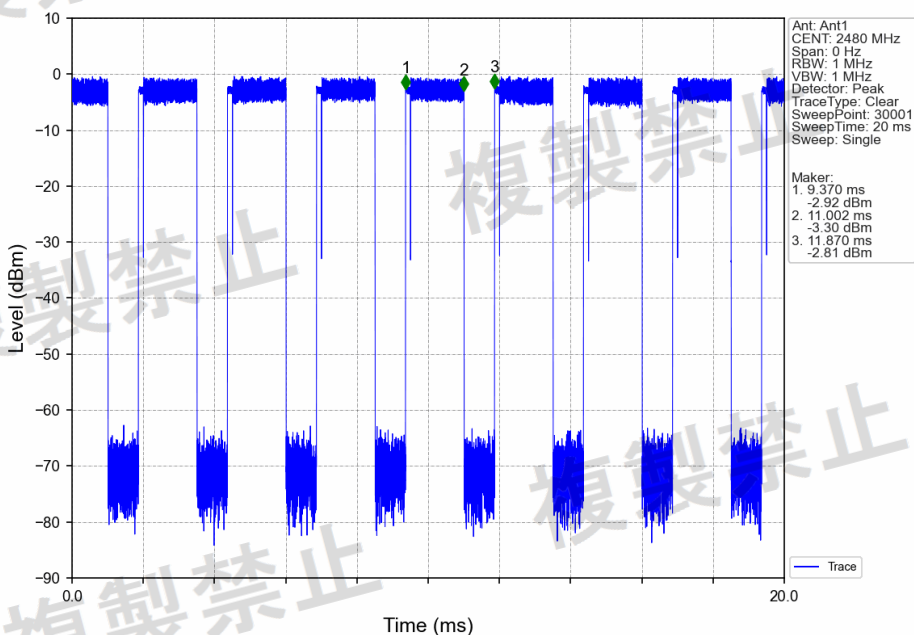


$\pi/4$ DQPSK_2DH5_2480MHz_Ant1_NTNV

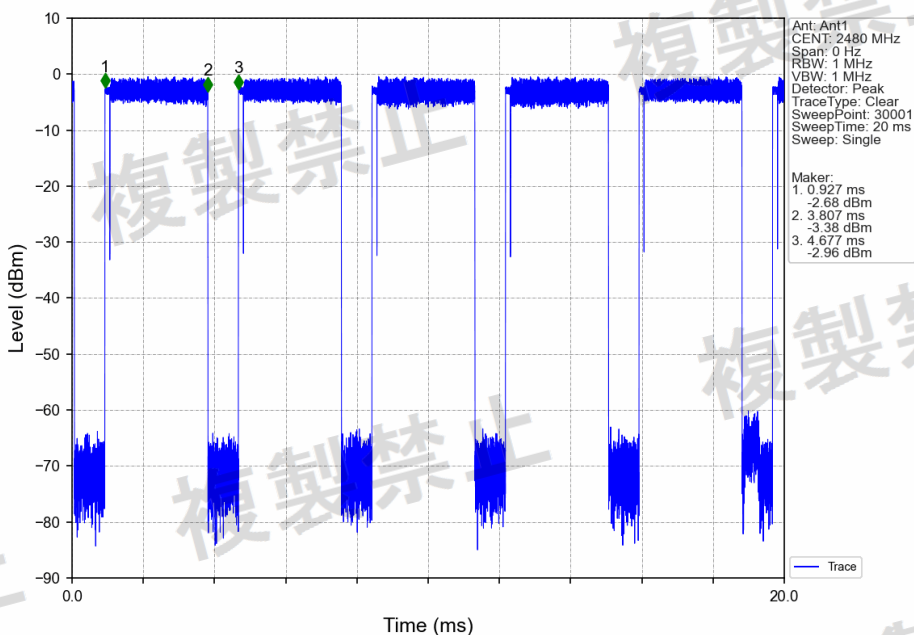



8DPSK 3DH1 2402MHz_Ant1_NTNV

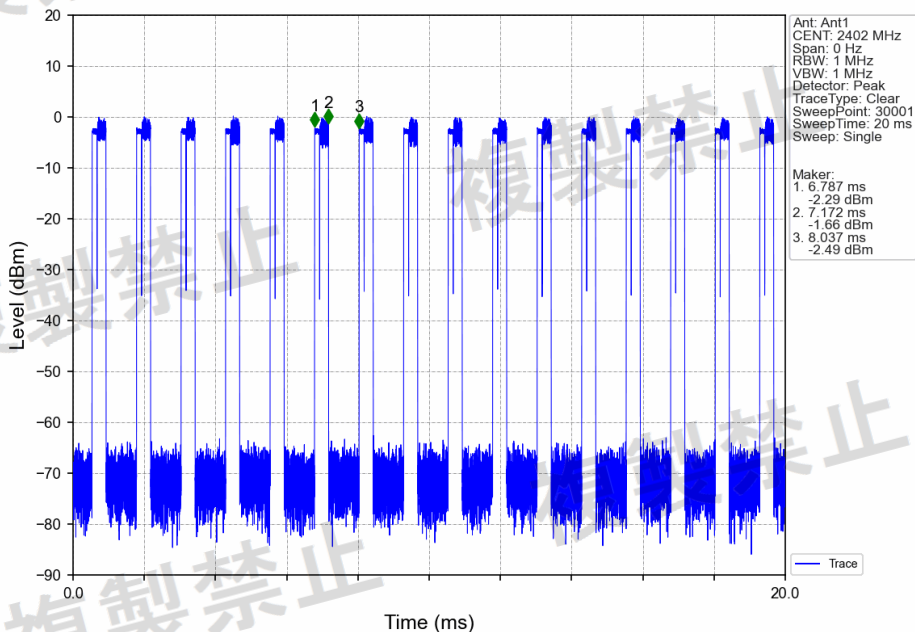

8DPSK 3DH3 2402MHz_Ant1_NTNV

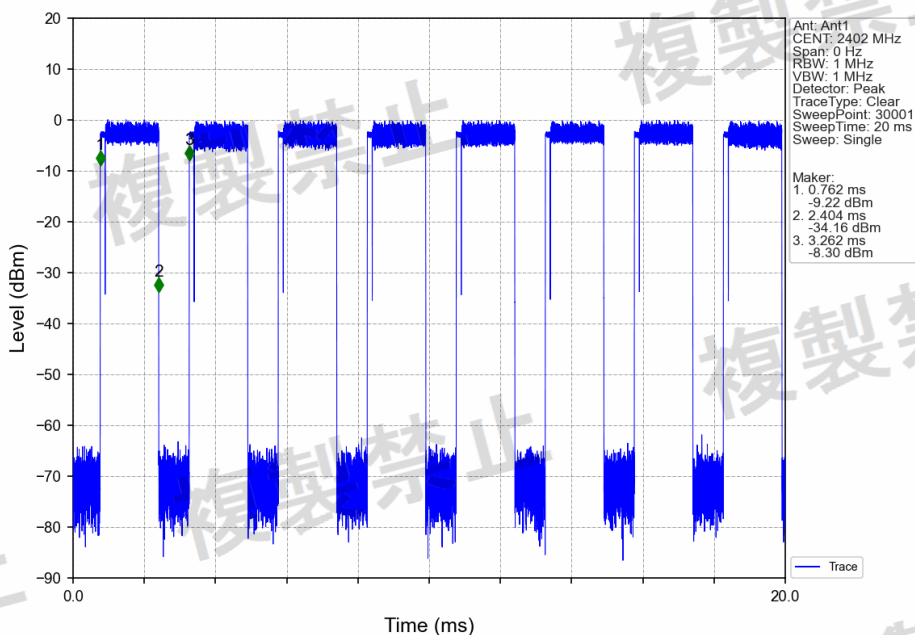

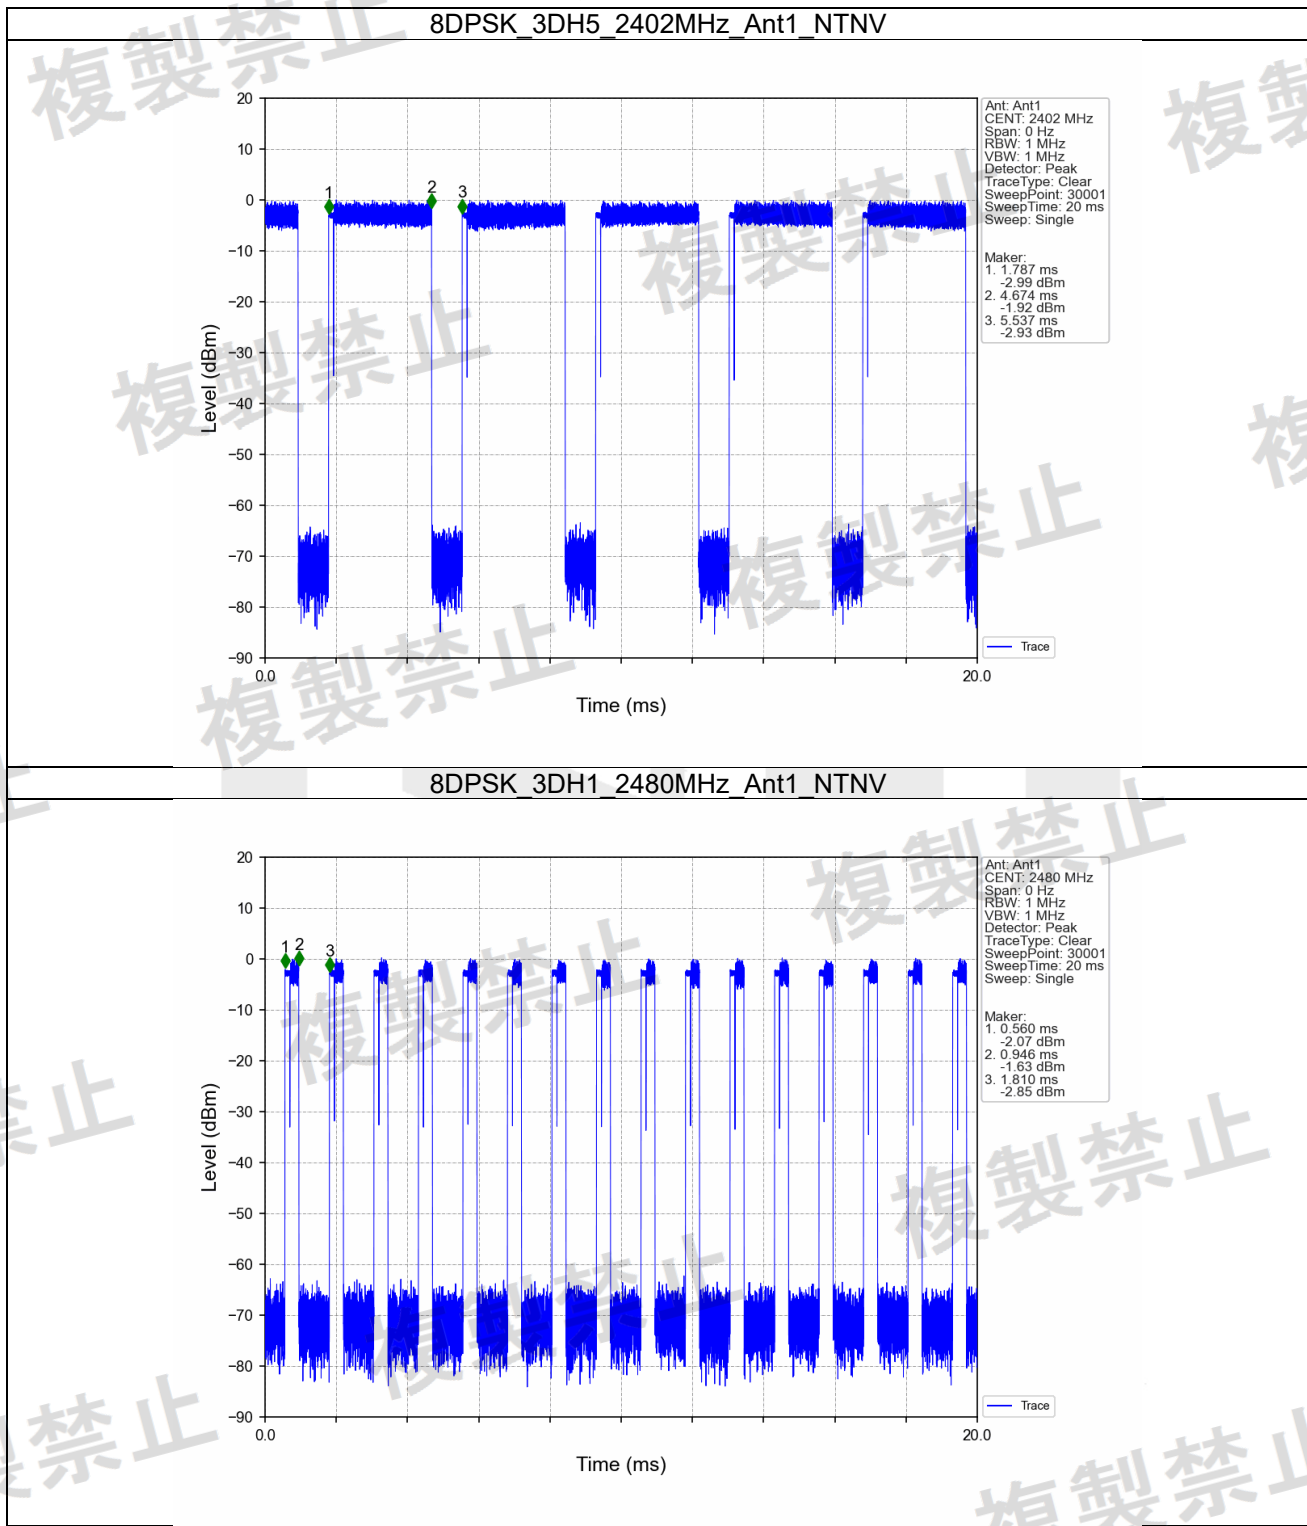

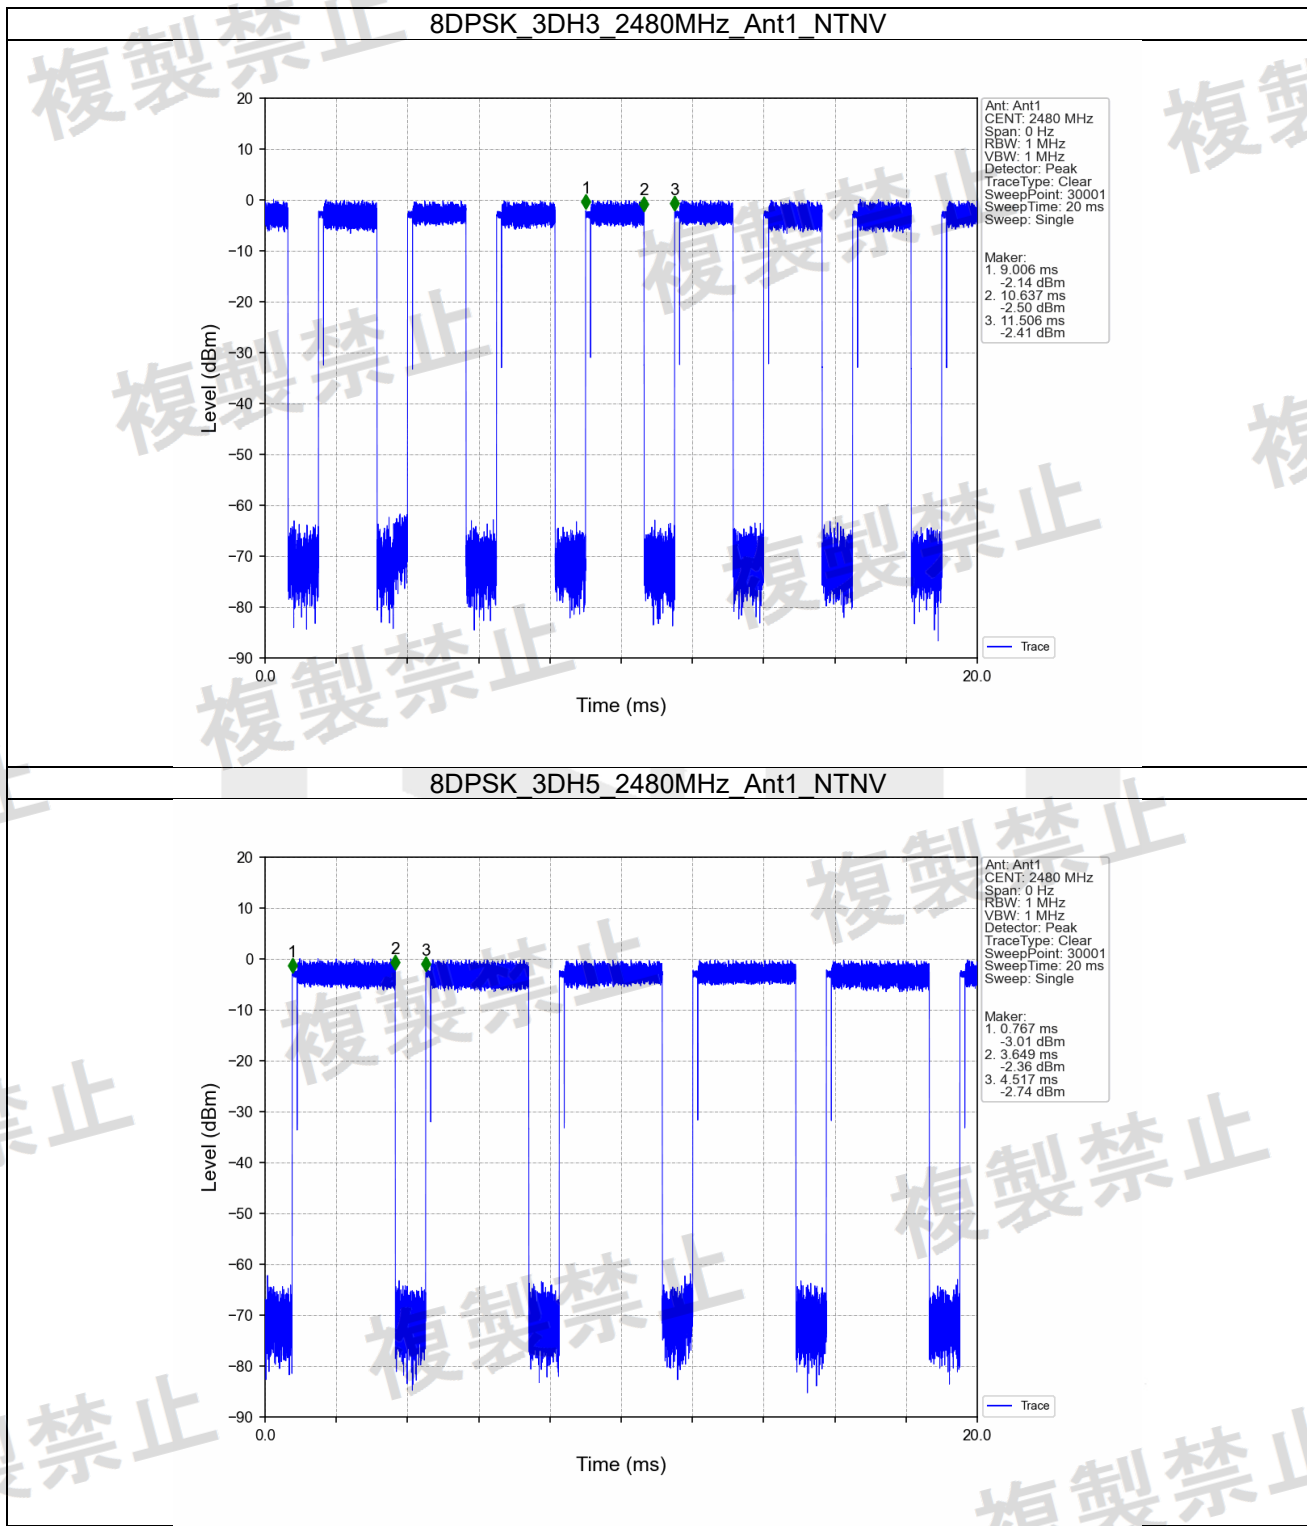

6. Spurious Emission Intensity


6.1 Test Result

6.1.1 TxSe_NTNV


NTNV												
Mode	TX Type	Freq. (MHz)	ANT	Freq. Range		Marker					Limit (uW /MHz)	Verdict
				Start (MHz)	Stop (MHz)	Freq. (MHz)	PK Power (dBm /MHz)	PK Power (uW /MHz)	AV Power (dBm /MHz)	AV Power (uW /MHz)		
GFSK	SISO	2402	1	30	2387	111	-51.97	0.006	/	/	2.5	Pass
				2387	2400	2399.961	-44.84	0.033	/	/	25	Pass
				2483.5	2496.5	2483.656	-54.41	0.004	/	/	25	Pass
				2496.5	12500	3203.5	-42.04	0.063	/	/	2.5	Pass
		2480	1	30	2387	111	-51.85	0.007	/	/	2.5	Pass
				2387	2400	2399.896	-57.80	0.002	/	/	25	Pass
				2483.5	2496.5	2483.968	-54.29	0.004	/	/	25	Pass
				2496.5	12500	3307.5	-41.93	0.064	/	/	2.5	Pass
$\pi/4$ DQPSK	SISO	2402	1	30	2387	111	-52.33	0.006	/	/	2.5	Pass
				2387	2400	2399.987	-34.13	0.386	/	/	25	Pass
				2483.5	2496.5	2487.27	-58.01	0.002	/	/	25	Pass
				2496.5	12500	3203.5	-42.31	0.059	/	/	2.5	Pass
		2480	1	30	2387	110.5	-51.81	0.007	/	/	2.5	Pass
				2387	2400	2399.571	-58.05	0.002	/	/	25	Pass
				2483.5	2496.5	2483.526	-50.50	0.009	/	/	25	Pass
				2496.5	12500	3307.5	-41.90	0.065	/	/	2.5	Pass
8DPSK	SISO	2402	1	30	2387	111	-52.14	0.006	/	/	2.5	Pass
				2387	2400	2399.987	-32.81	0.524	/	/	25	Pass
				2483.5	2496.5	2486.685	-58.32	0.001	/	/	25	Pass
				2496.5	12500	3203.5	-42.21	0.060	/	/	2.5	Pass
		2480	1	30	2387	111	-52.12	0.006	/	/	2.5	Pass
				2387	2400	2399.259	-55.67	0.003	/	/	25	Pass
				2483.5	2496.5	2483.682	-52.58	0.006	/	/	25	Pass
				2496.5	12500	3307.5	-41.96	0.064	/	/	2.5	Pass

6.2 Test Graph


6.2.1 TxSe_NTNV

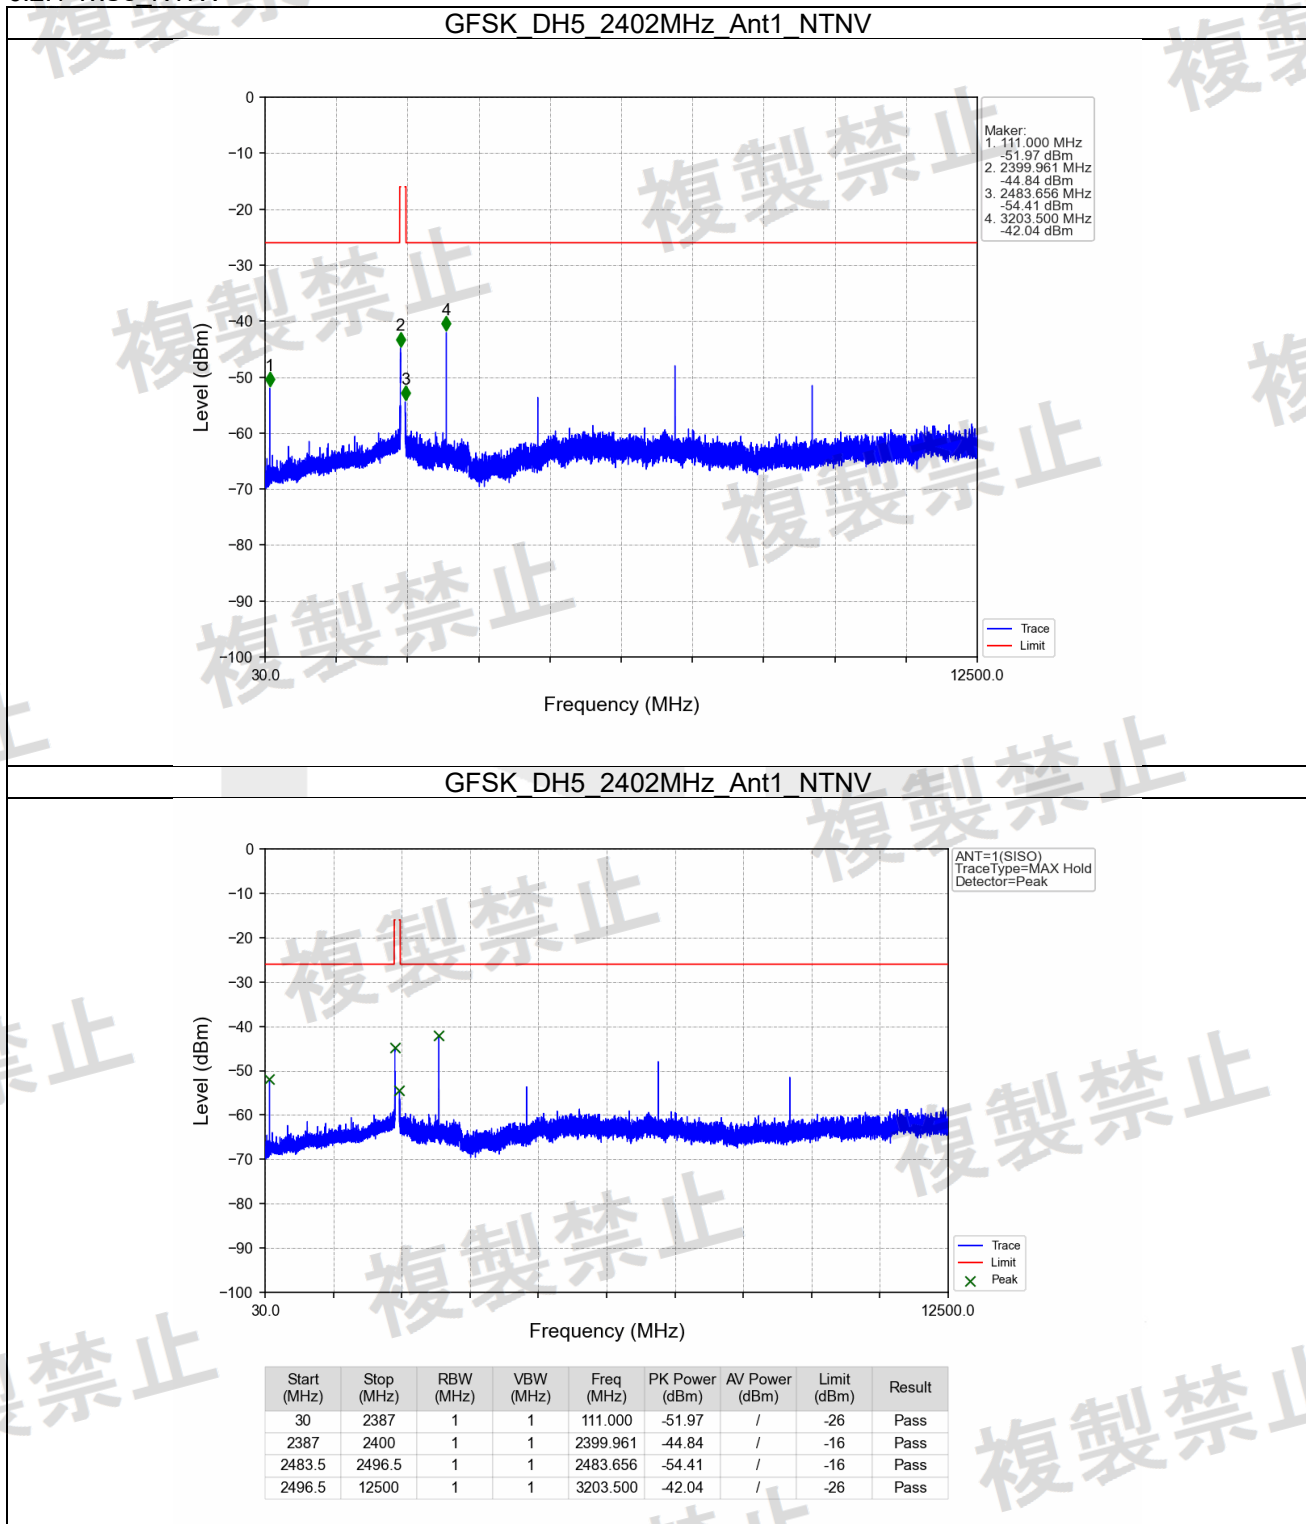

GFSK DH5_2480MHz_Ant1_NTNV

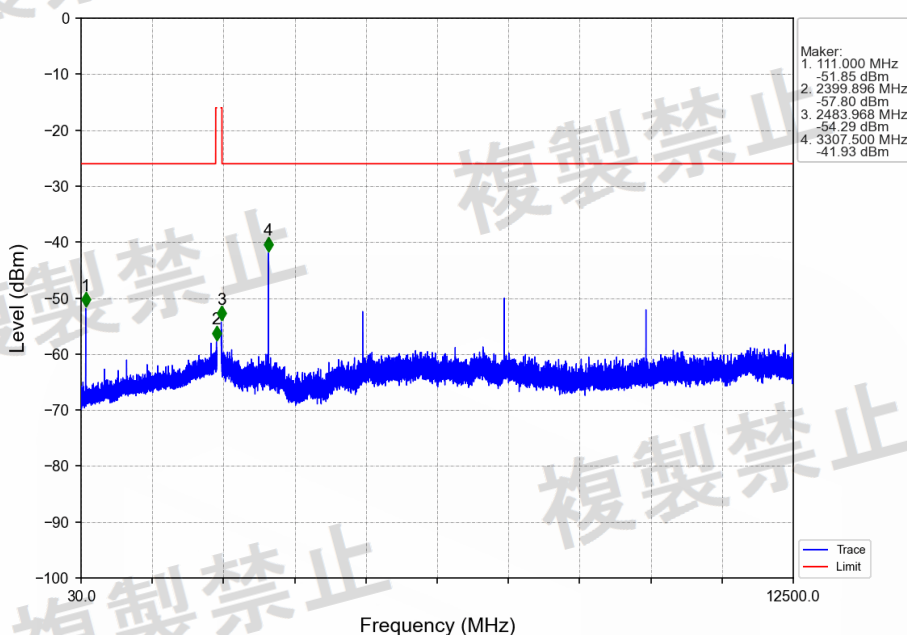


GFSK DH5_2480MHz_Ant1_NTNV

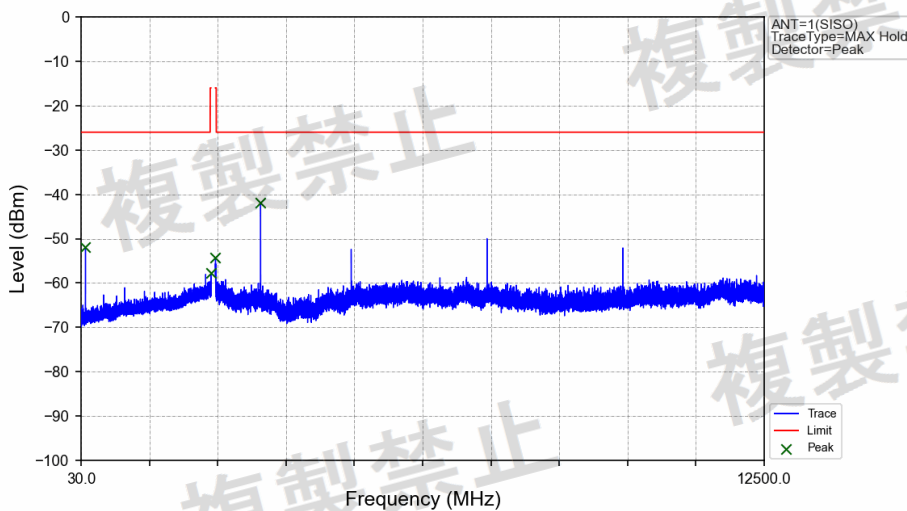


Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	2387	1	1	111.000	-51.85	/	-26	Pass
2387	2400	1	1	2399.896	-57.80	/	-16	Pass
2483.5	2496.5	1	1	2483.968	-54.29	/	-16	Pass
2496.5	12500	1	1	3307.500	-41.93	/	-26	Pass

$\pi/4$ DQPSK_2DH5_2402MHz_Ant1_NTNV

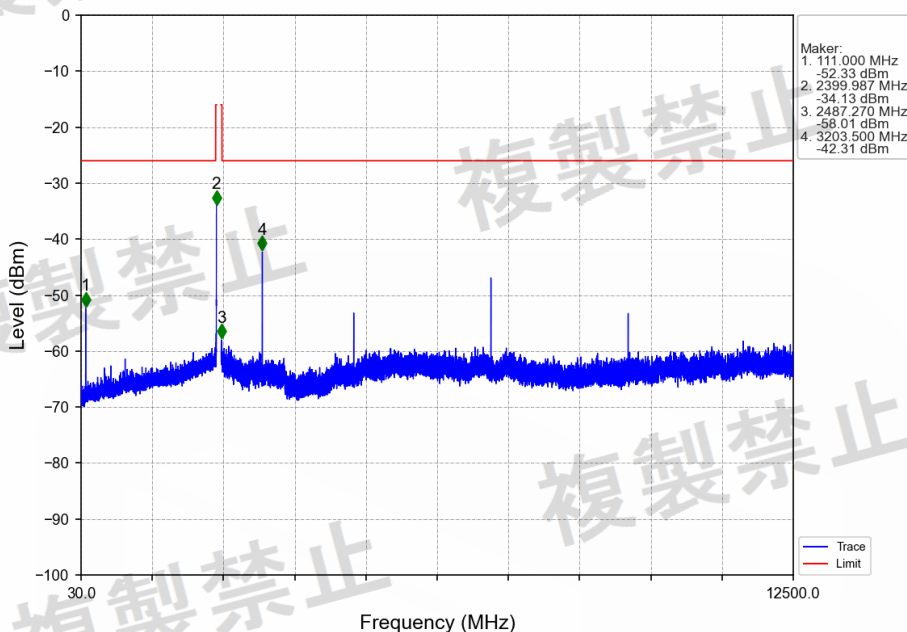


$\pi/4$ DQPSK_2DH5_2402MHz_Ant1_NTNV

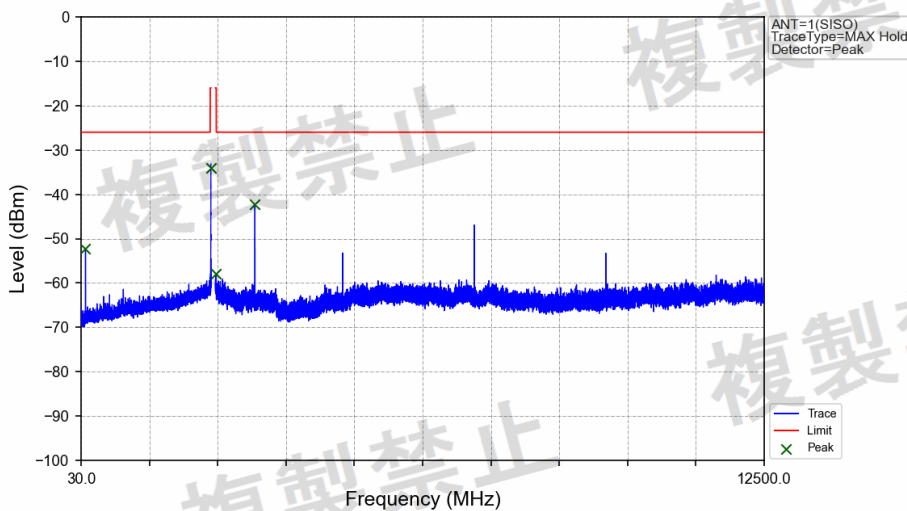


Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	2387	1	1	111.000	-52.33	/	-26	Pass
2387	2400	1	1	2399.987	-34.13	/	-16	Pass
2483.5	2496.5	1	1	2487.270	-58.01	/	-16	Pass
2496.5	12500	1	1	3203.500	-42.31	/	-26	Pass

$\pi/4$ DQPSK_2DH5_2480MHz_Ant1_NTNV

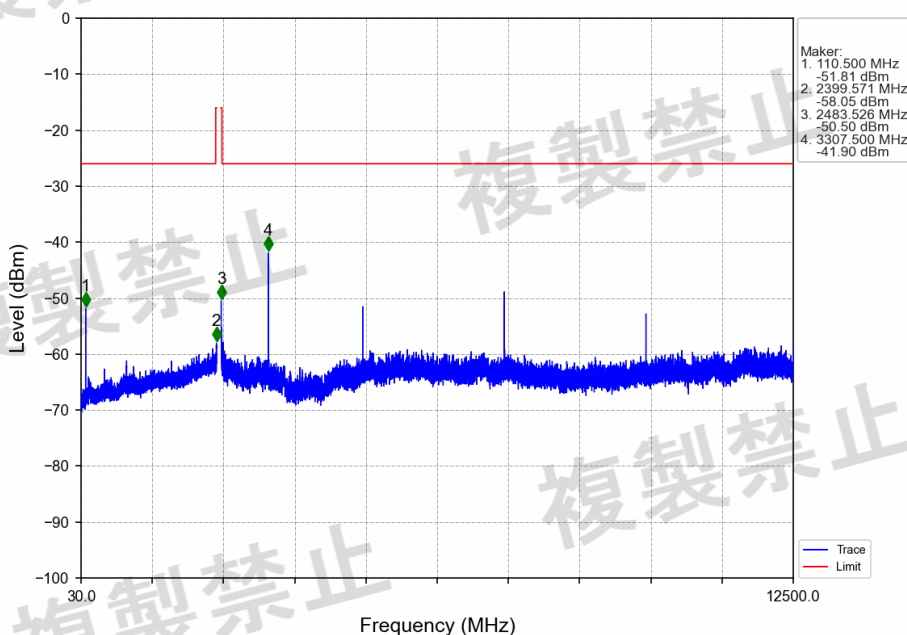


$\pi/4$ DQPSK_2DH5_2480MHz_Ant1_NTNV

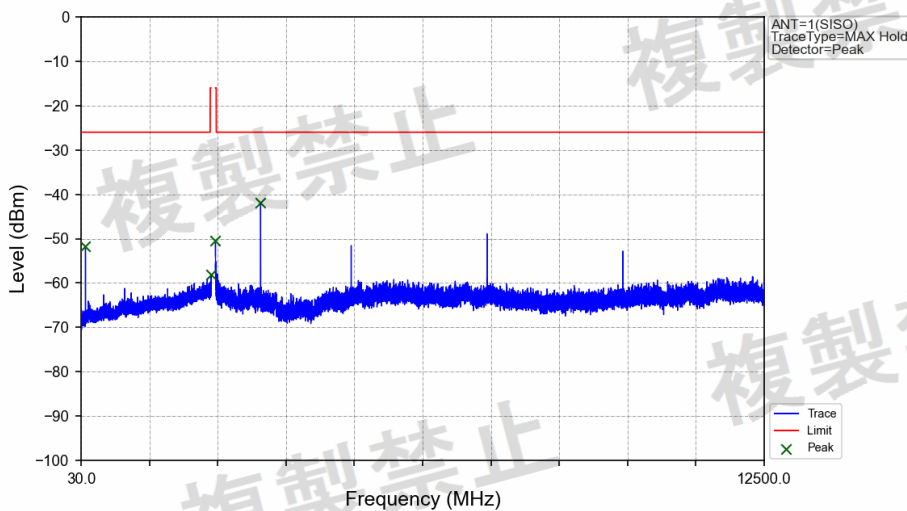


Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	2387	1	1	110.500	-51.81	/	-26	Pass
2387	2400	1	1	2399.571	-58.05	/	-16	Pass
2483.5	2496.5	1	1	2483.526	-50.50	/	-16	Pass
2496.5	12500	1	1	3307.500	-41.90	/	-26	Pass

8DPSK 3DH5_2402MHz_Ant1_NTNV

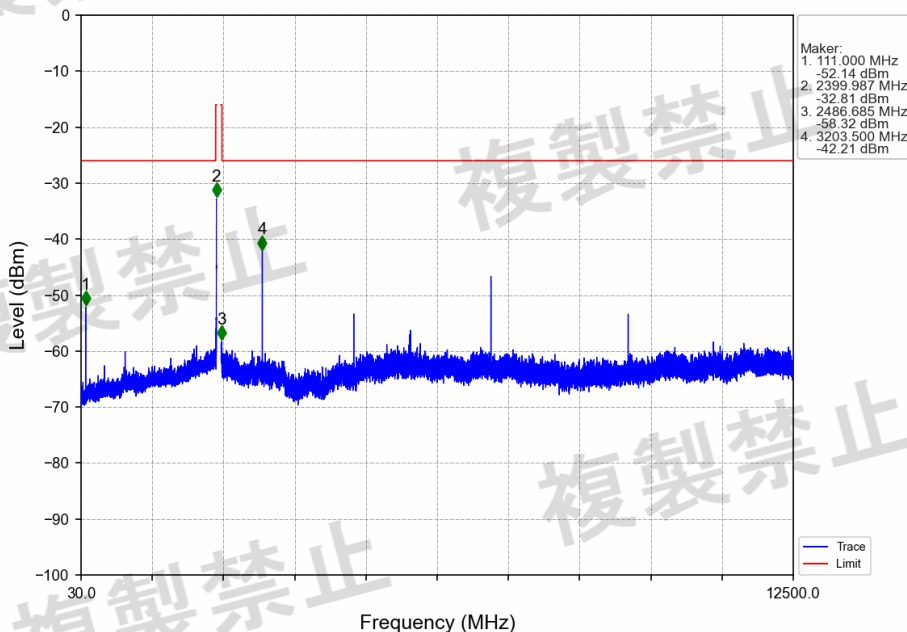


8DPSK 3DH5_2402MHz_Ant1_NTNV

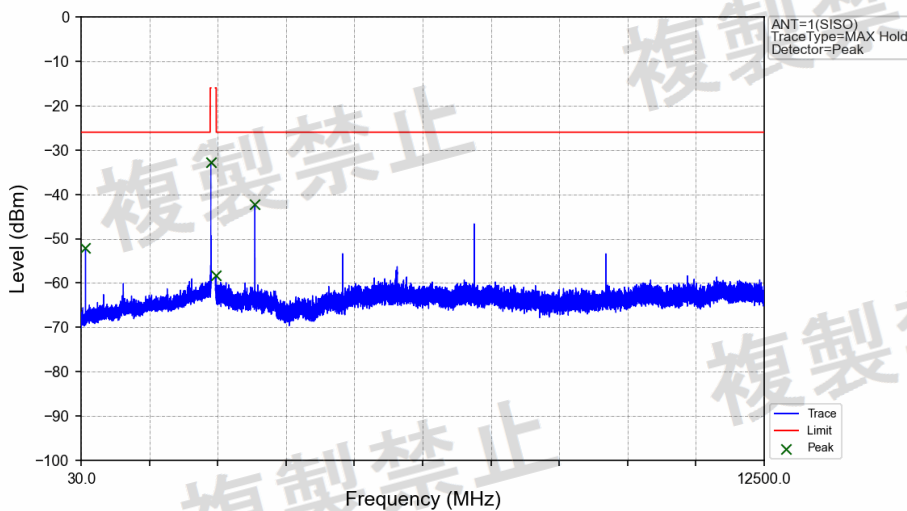


Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	2387	1	1	111.000	-52.14	/	-26	Pass
2387	2400	1	1	2399.987	-32.81	/	-16	Pass
2483.5	2496.5	1	1	2486.685	-58.32	/	-16	Pass
2496.5	12500	1	1	3203.500	-42.21	/	-26	Pass

8DPSK 3DH5 2480MHz_Ant1_NTNV

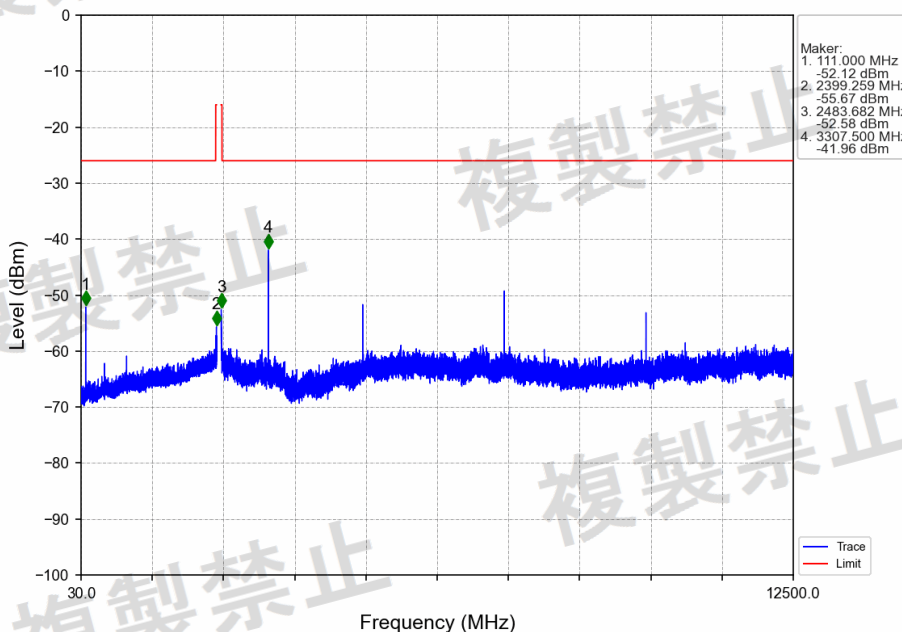

8DPSK 3DH5 2480MHz_Ant1_NTNV

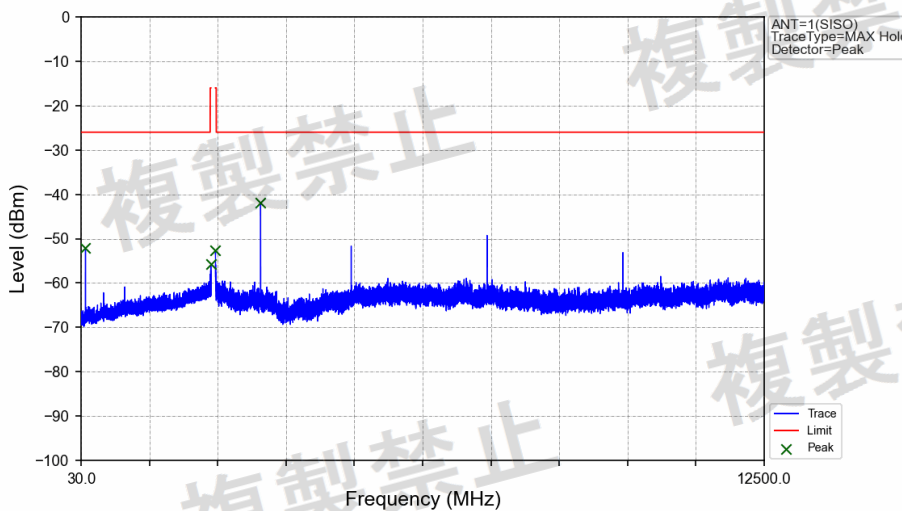

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	2387	1	1	111.000	-52.12	/	-26	Pass
2387	2400	1	1	2399.259	-55.67	/	-16	Pass
2483.5	2496.5	1	1	2483.682	-52.58	/	-16	Pass
2496.5	12500	1	1	3307.500	-41.96	/	-26	Pass


7. Secondary Radiated Emission

7.1 Test Result


7.1.1 RxSe_NTNV

NTNV												
Mode	TX Type	Freq. (MHz)	ANT	Freq. Range		Marker					Limit (nW)	Verdict
				Start (MHz)	Stop (MHz)	Freq. (MHz)	PK Power (dBm)	PK Power (nW)	AV Power (dBm)	AV Power (nW)		
GFSK	SISO	2402	1	30	1000	911.3	-65.69	0.270	/	/	4	Pass
				1000	12500	12346	-63.74	0.423	/	/	20	Pass
		2480	1	30	1000	440	-69.53	0.111	/	/	4	Pass
				1000	12500	12222	-64.18	0.382	/	/	20	Pass
$\pi/4$ DQPSK	SISO	2402	1	30	1000	705.25	-66.06	0.248	/	/	4	Pass
				1000	12500	11806	-64.31	0.371	/	/	20	Pass
		2480	1	30	1000	440	-69.64	0.109	/	/	4	Pass
				1000	12500	11811	-64.19	0.381	/	/	20	Pass
8DPSK	SISO	2402	1	30	1000	904.55	-67.10	0.195	/	/	4	Pass
				1000	12500	5468.5	-63.88	0.409	/	/	20	Pass
		2480	1	30	1000	440	-68.93	0.128	/	/	4	Pass
				1000	12500	2439	-58.46	1.426	/	/	20	Pass


7.2 Test Graph
7.2.1 RxSe NTN

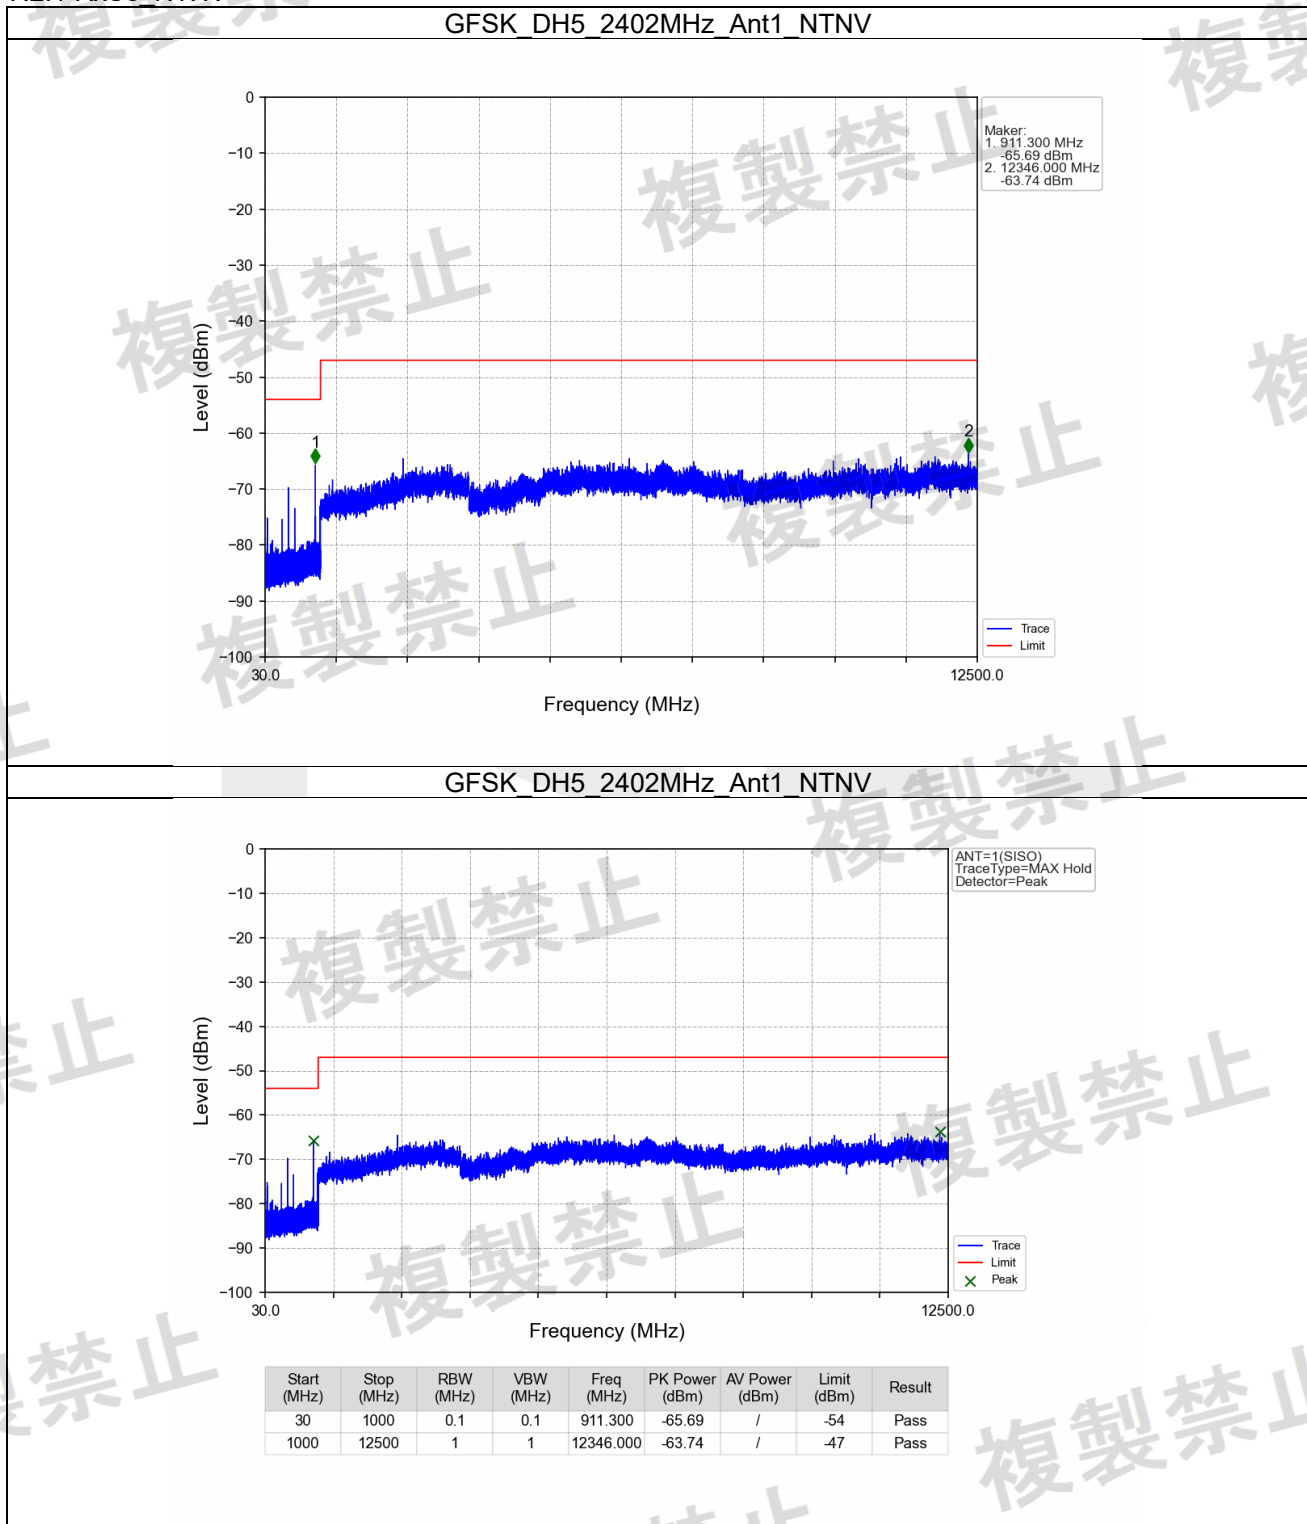

GFSK DH5_2480MHz_Ant1_NTNV

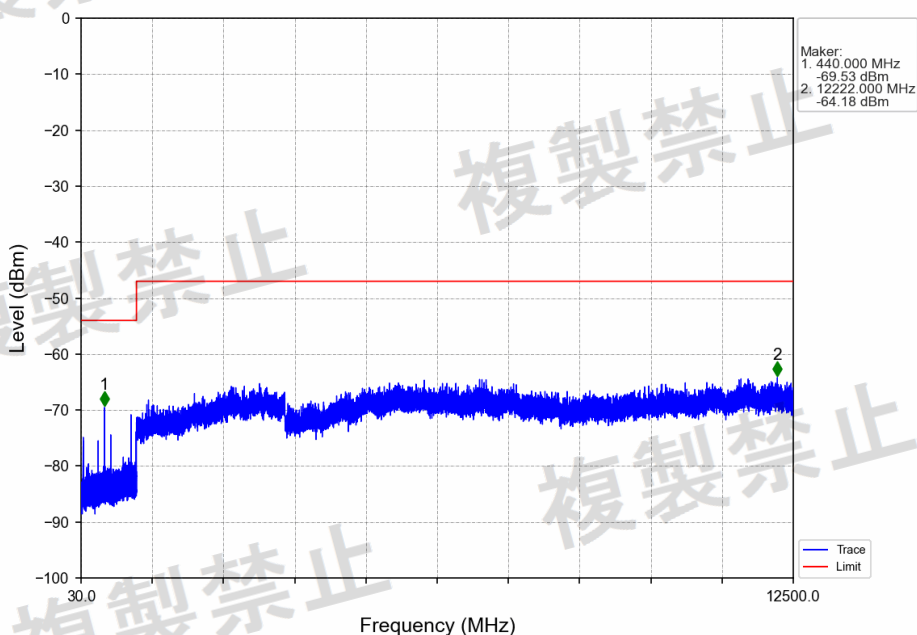


GFSK DH5_2480MHz_Ant1_NTNV

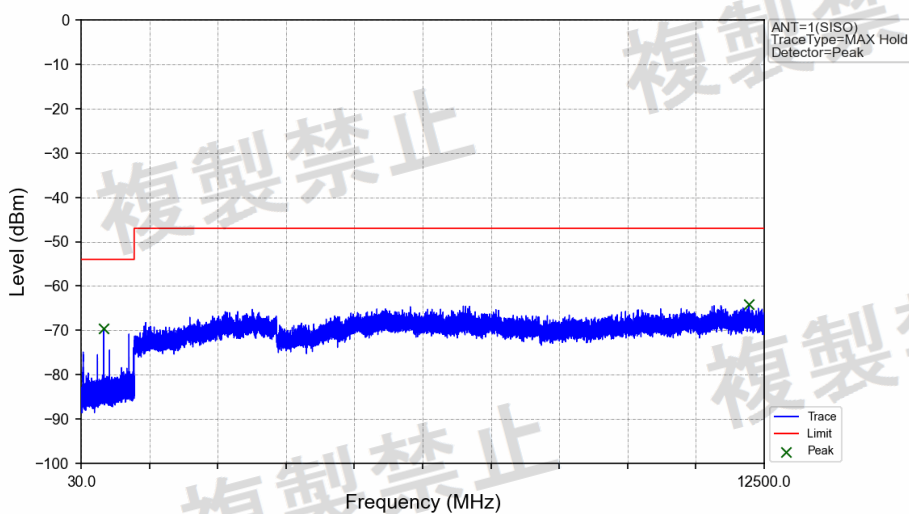


Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	1000	0.1	0.1	440.000	-69.53	/	-54	Pass
1000	12500	1	1	12222.000	-64.18	/	-47	Pass

$\pi/4$ DQPSK_2DH5_2402MHz_Ant1_NTNV

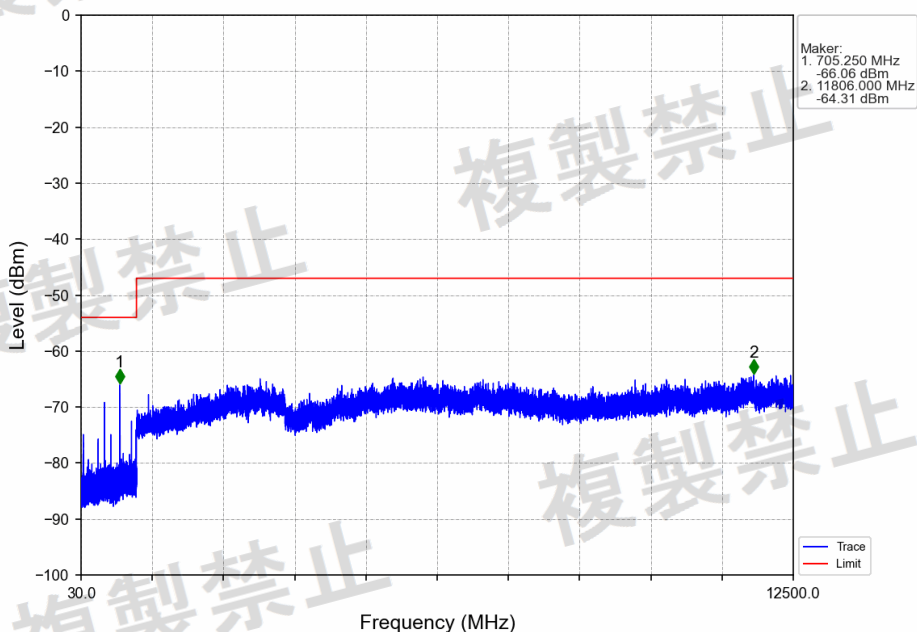


$\pi/4$ DQPSK_2DH5_2402MHz_Ant1_NTNV

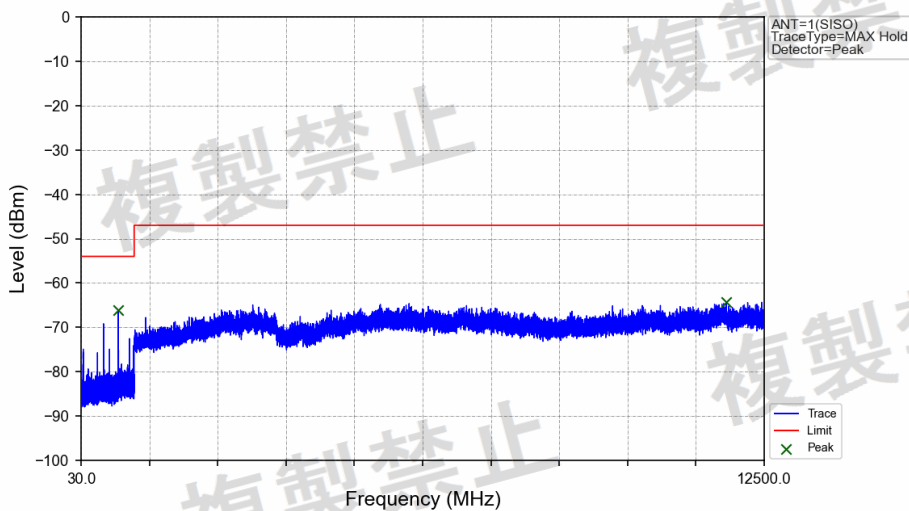


Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	1000	0.1	0.1	705.250	-66.06	/	-54	Pass
1000	12500	1	1	11806.000	-64.31	/	-47	Pass

$\pi/4$ DQPSK_2DH5_2480MHz_Ant1_NTNV

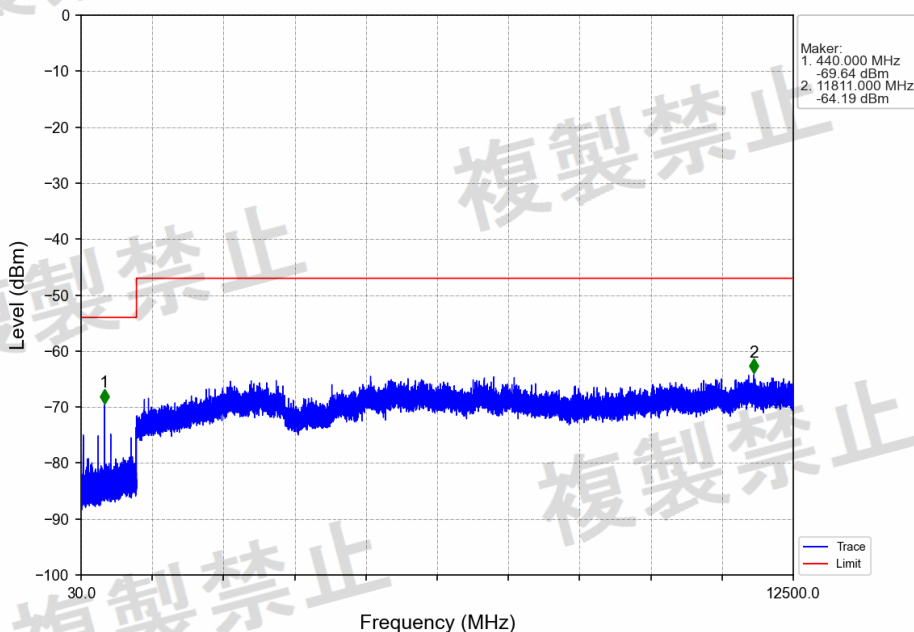


$\pi/4$ DQPSK_2DH5_2480MHz_Ant1_NTNV

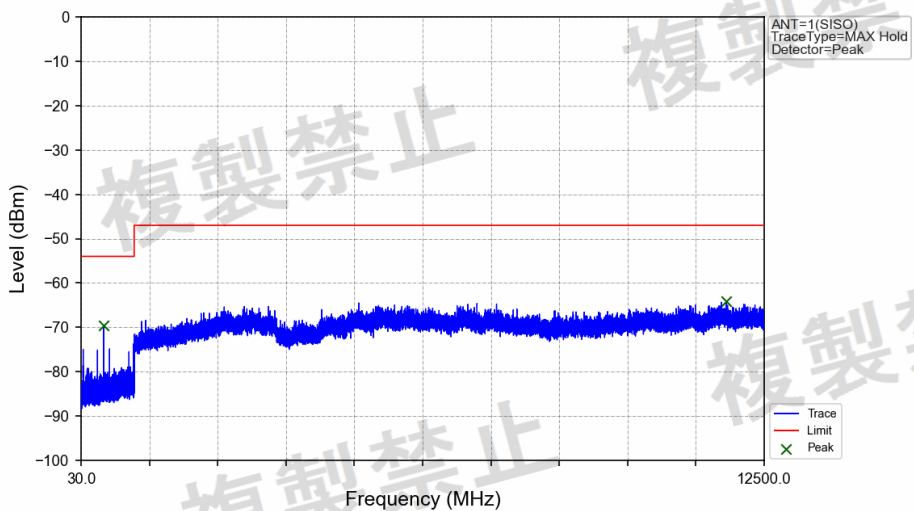


Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	1000	0.1	0.1	440.000	-69.64	/	-54	Pass
1000	12500	1	1	11811.000	-64.19	/	-47	Pass

8DPSK 3DH5_2402MHz_Ant1_NTNV

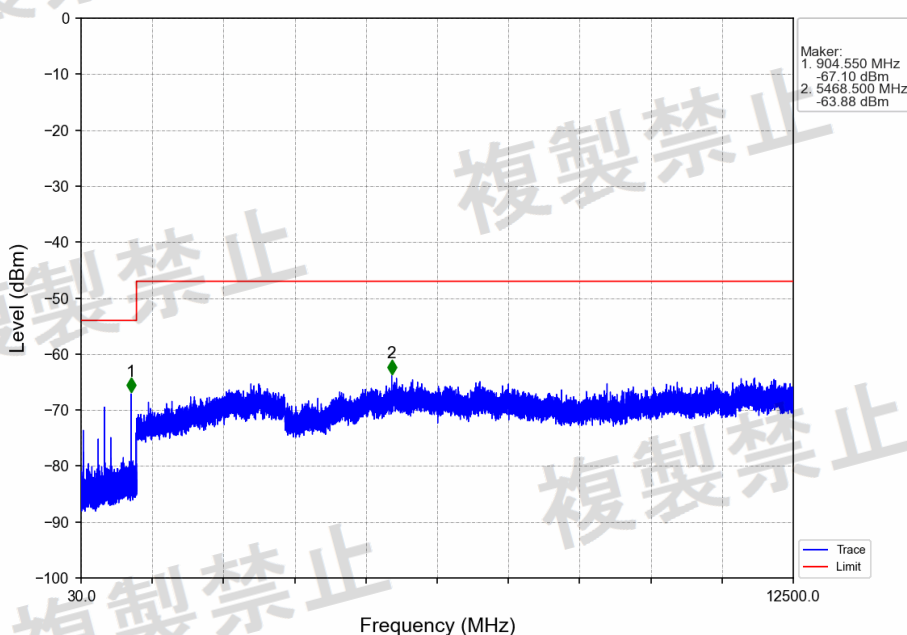


8DPSK 3DH5_2402MHz_Ant1_NTNV

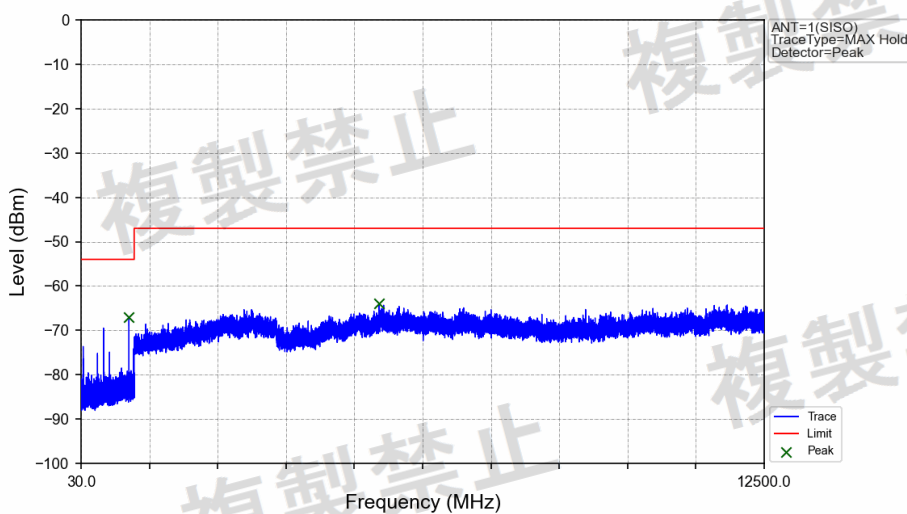


Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	1000	0.1	0.1	904.550	-67.10	/	-54	Pass
1000	12500	1	1	5468.500	-63.88	/	-47	Pass

8DPSK 3DH5 2480MHz_Ant1_NTNV

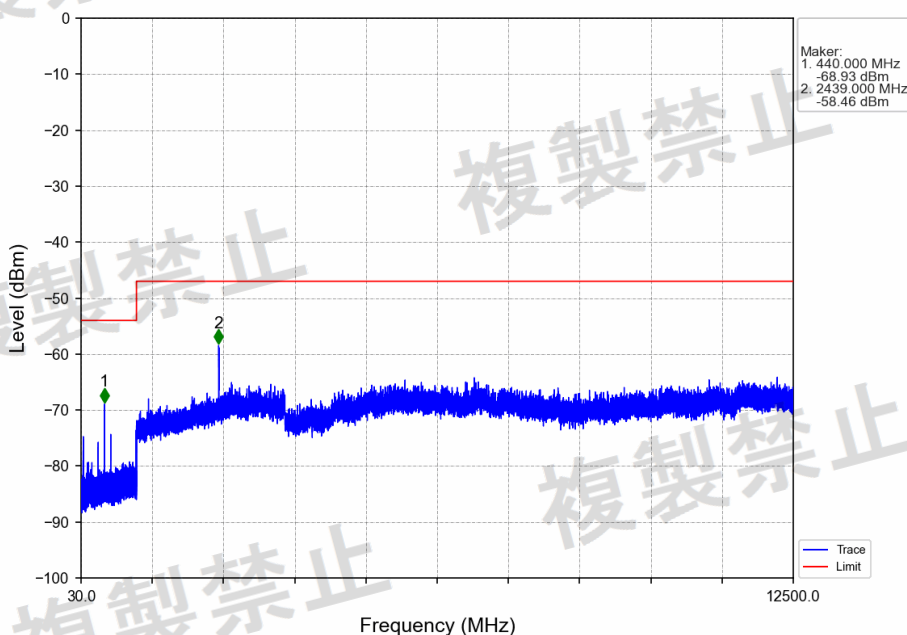

8DPSK 3DH5 2480MHz_Ant1_NTNV

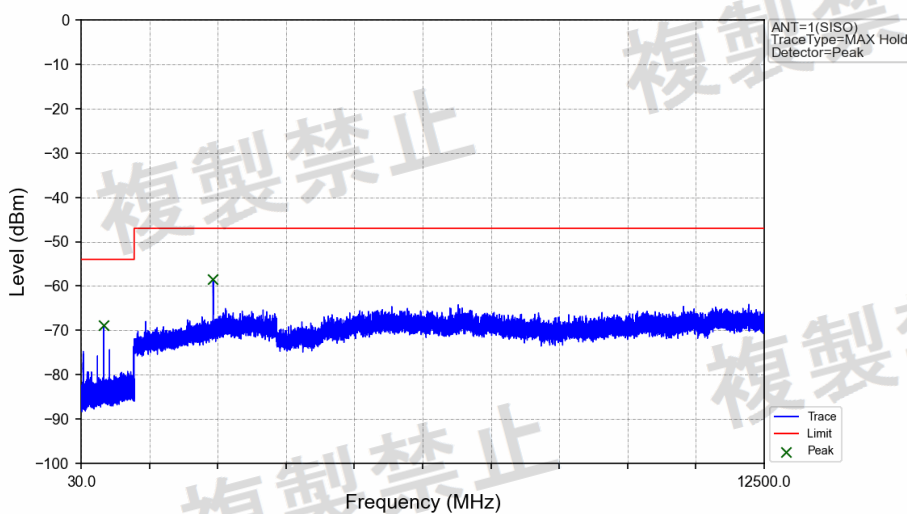

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	1000	0.1	0.1	440.000	-68.93	/	-54	Pass
1000	12500	1	1	2439.000	-58.46	/	-47	Pass

STATEMENT

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--- End of Report ---