




RF Test Data

Frequency Error	2
Antenna Power	9
EIRP Power	22
Occupied Channel Bandwidth	23
Spreading Bandwidth	30
Tx Spurious Emission	37
Rx Spurious Emission	73
Carrier Sense	87



Frequency Error


Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	b	2412	Ant1	2412.011	11000	4.56	50	Pass
NVNT	b	2442	Ant1	2442.009	9000	3.69	50	Pass
NVNT	b	2472	Ant1	2472.01	10000	4.05	50	Pass
NVNT	g	2412	Ant1	2412.01	10000	4.15	50	Pass
NVNT	g	2442	Ant1	2442.009	9000	3.69	50	Pass
NVNT	g	2472	Ant1	2472.009	9000	3.64	50	Pass
NVNT	n20	2412	Ant1	2412.01	10000	4.15	50	Pass
NVNT	n20	2442	Ant1	2442.009	9000	3.69	50	Pass
NVNT	n20	2472	Ant1	2472.009	9000	3.64	50	Pass
NVNT	n40	2422	Ant1	2422.008	8000	3.3	50	Pass
NVNT	n40	2442	Ant1	2442.008	8000	3.28	50	Pass
NVNT	n40	2462	Ant1	2462.008	8000	3.25	50	Pass

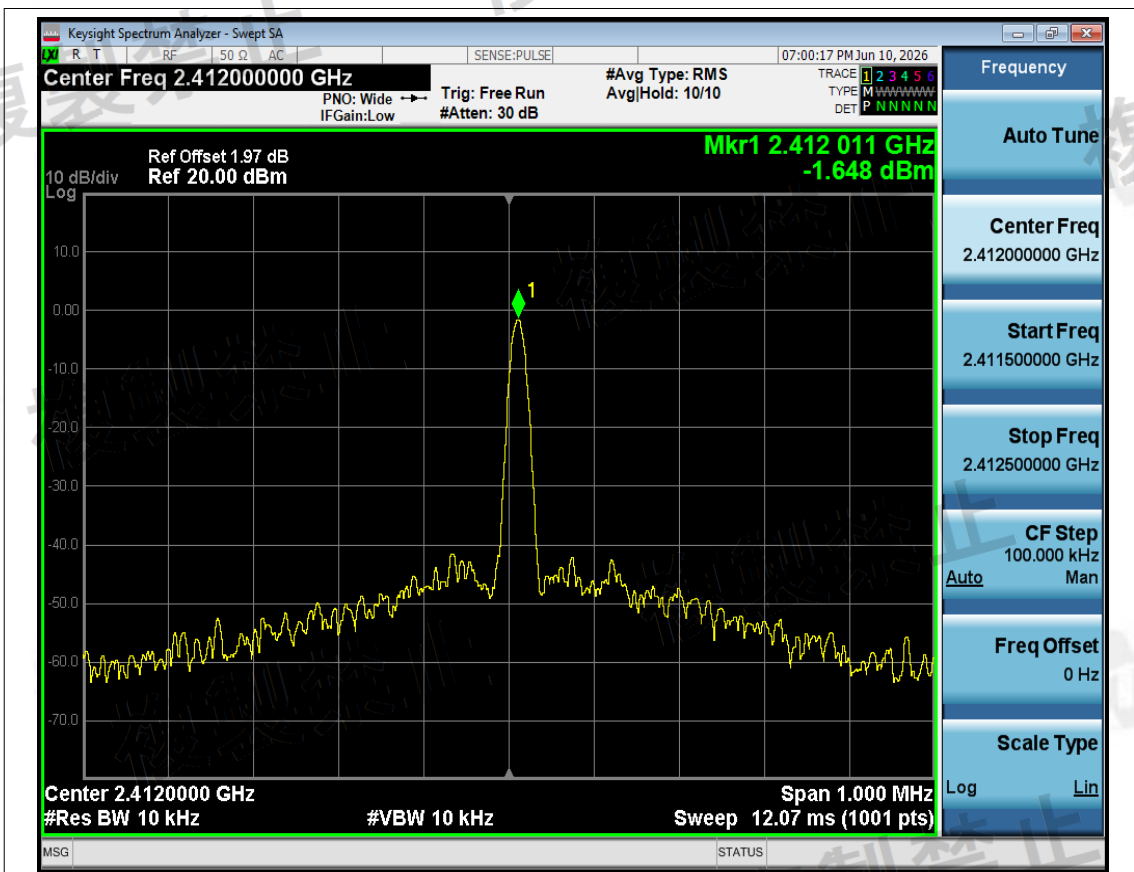


Freq. Error NVNT b 2412MHz Ant1



Freq. Error NVNT b 2442MHz Ant1

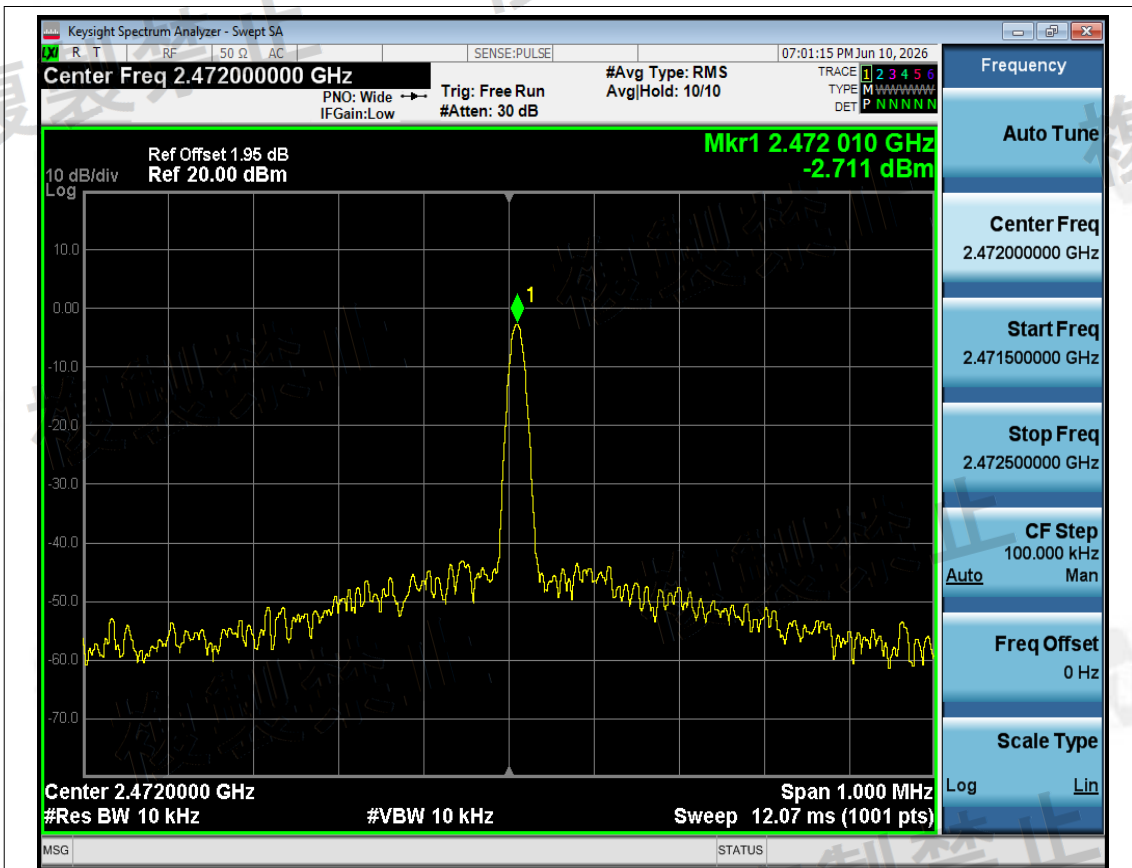


Freq. Error NVNT b 2472MHz Ant1

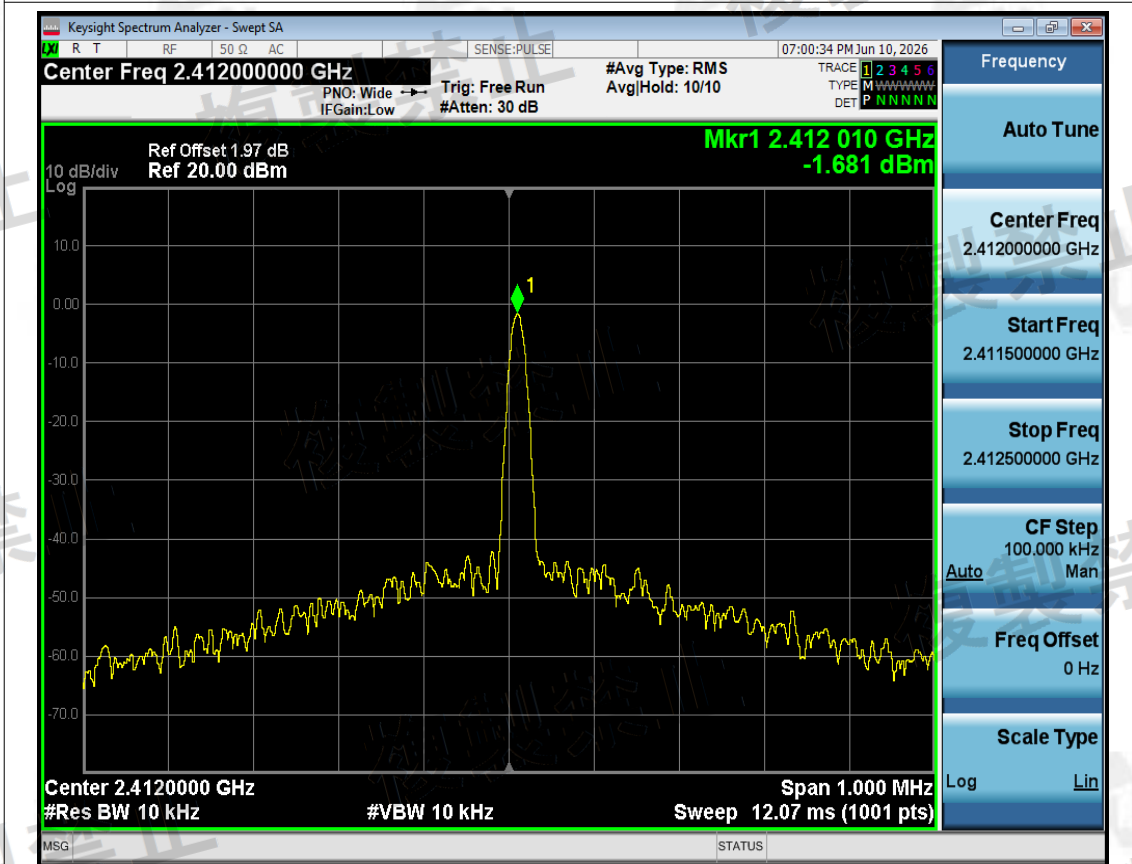

Freq. Error NVNT g 2412MHz Ant1




Freq. Error NVNT g 2442MHz Ant1

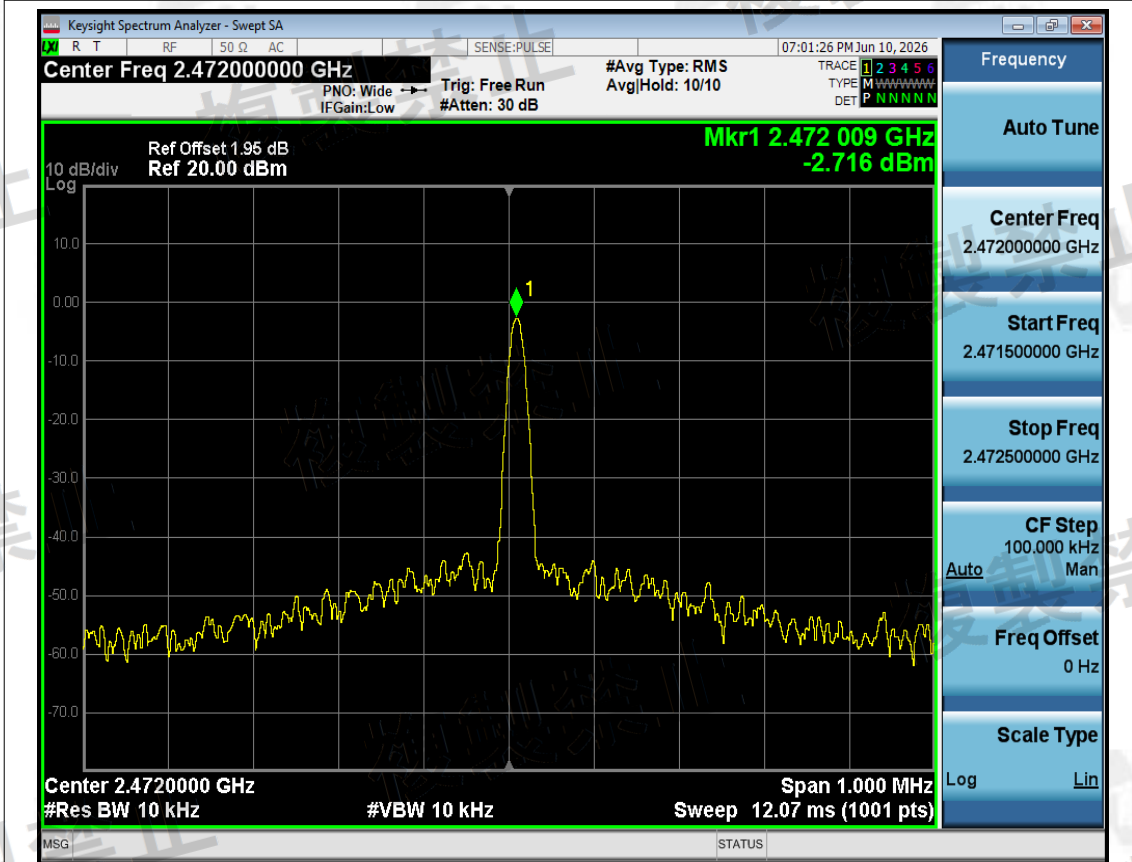


Freq. Error NVNT g 2472MHz Ant1




Freq. Error NVNT n20 2412MHz Ant1

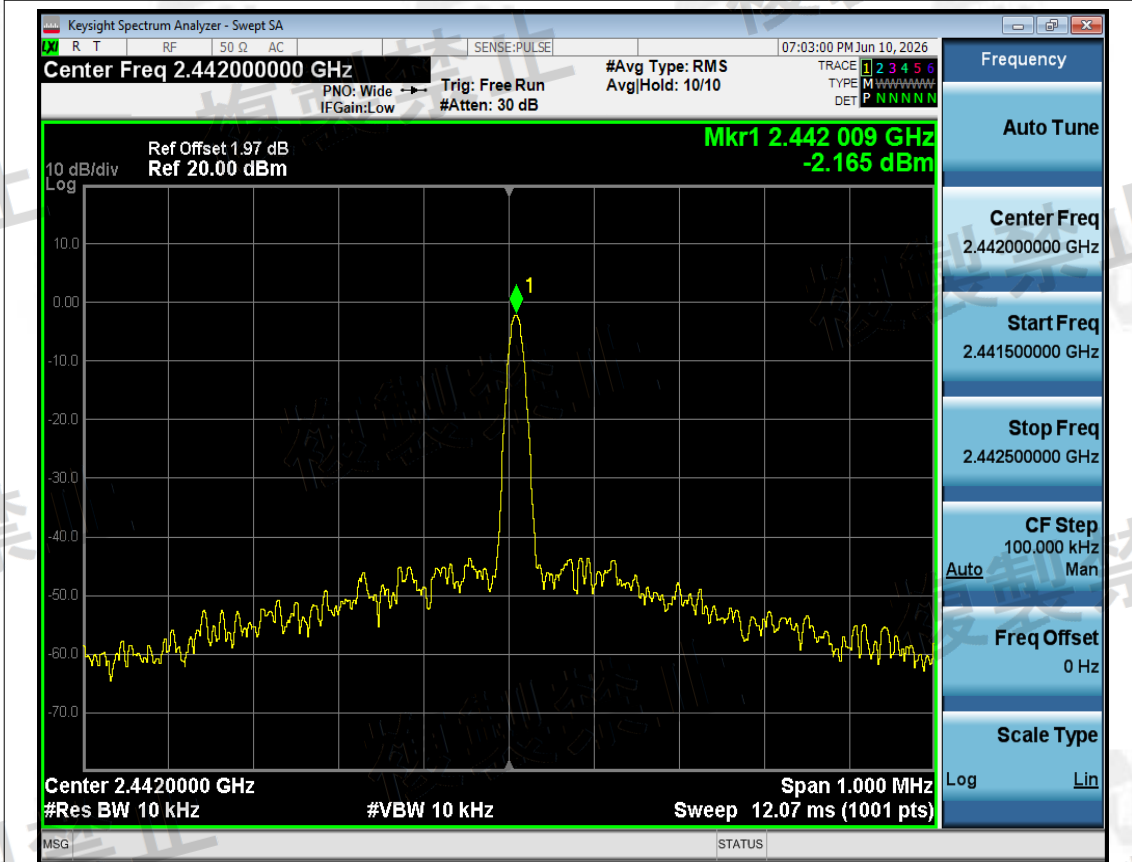


Freq. Error NVNT n20 2442MHz Ant1

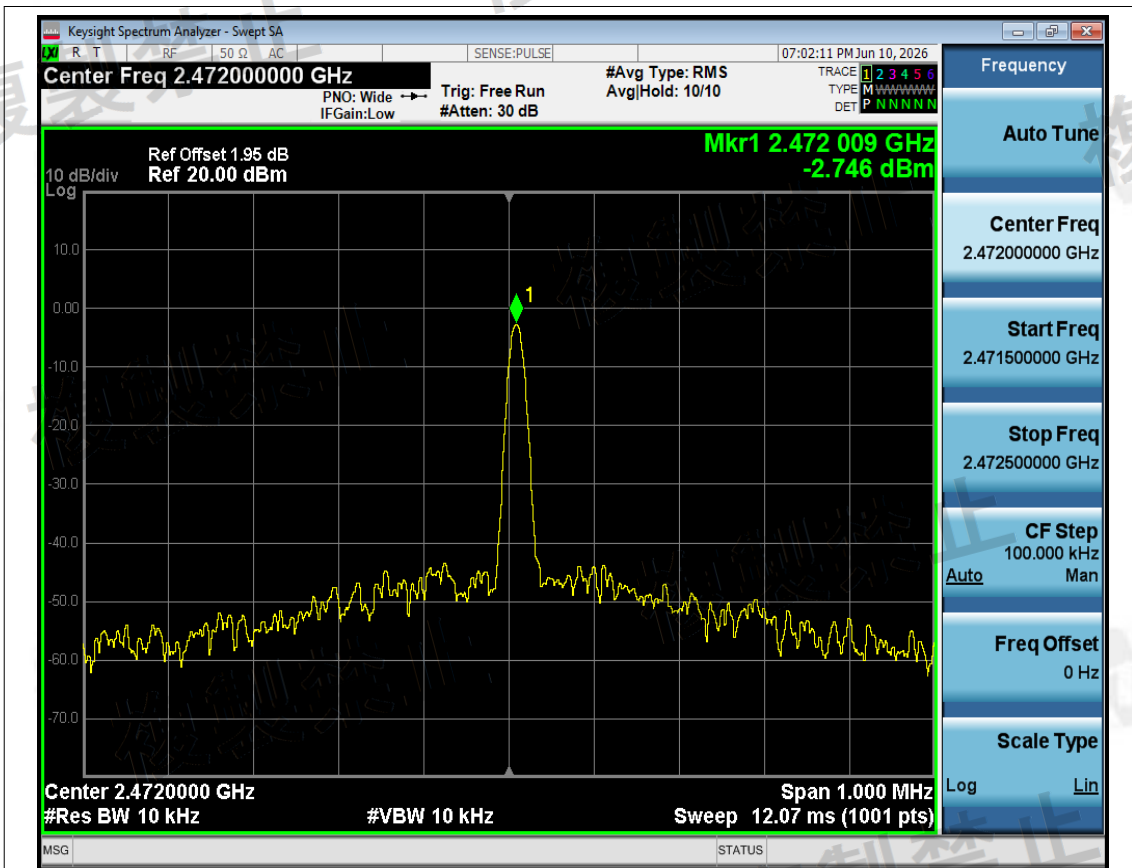


Freq. Error NVNT n20 2472MHz Ant1

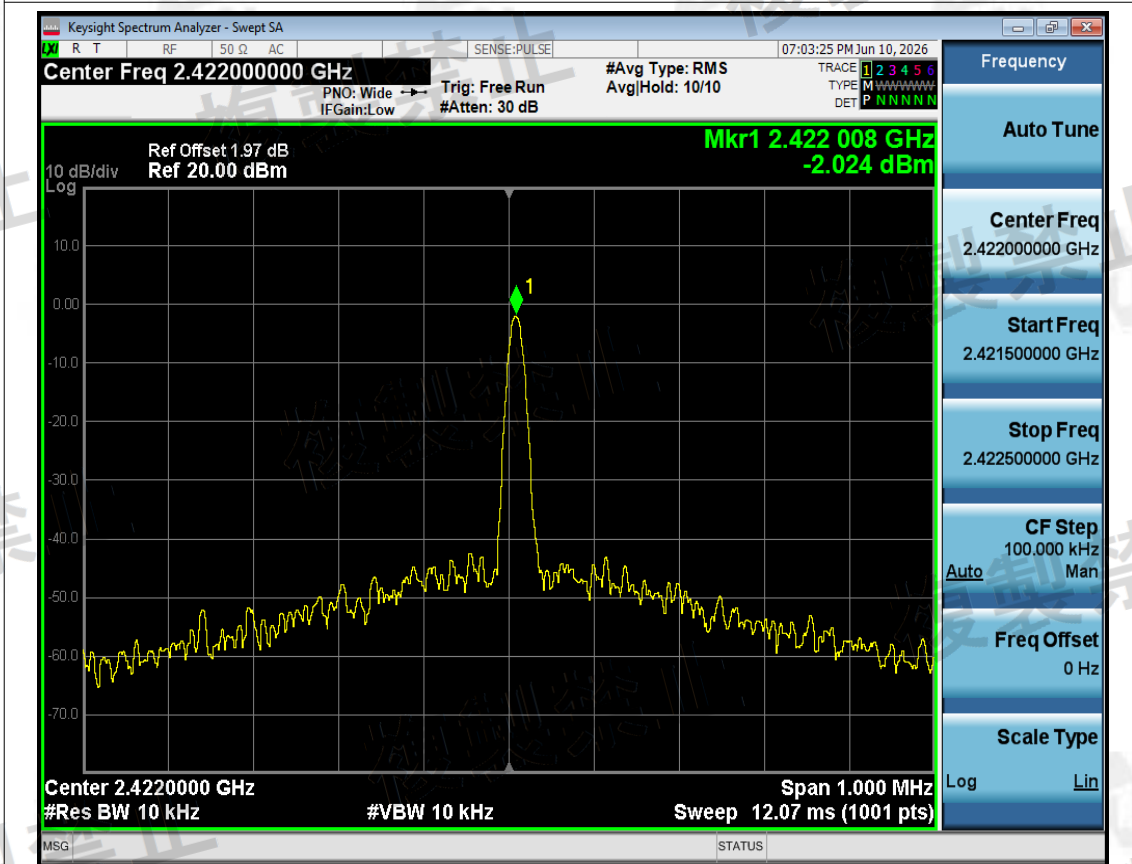

Freq. Error NVNT n40 2422MHz Ant1

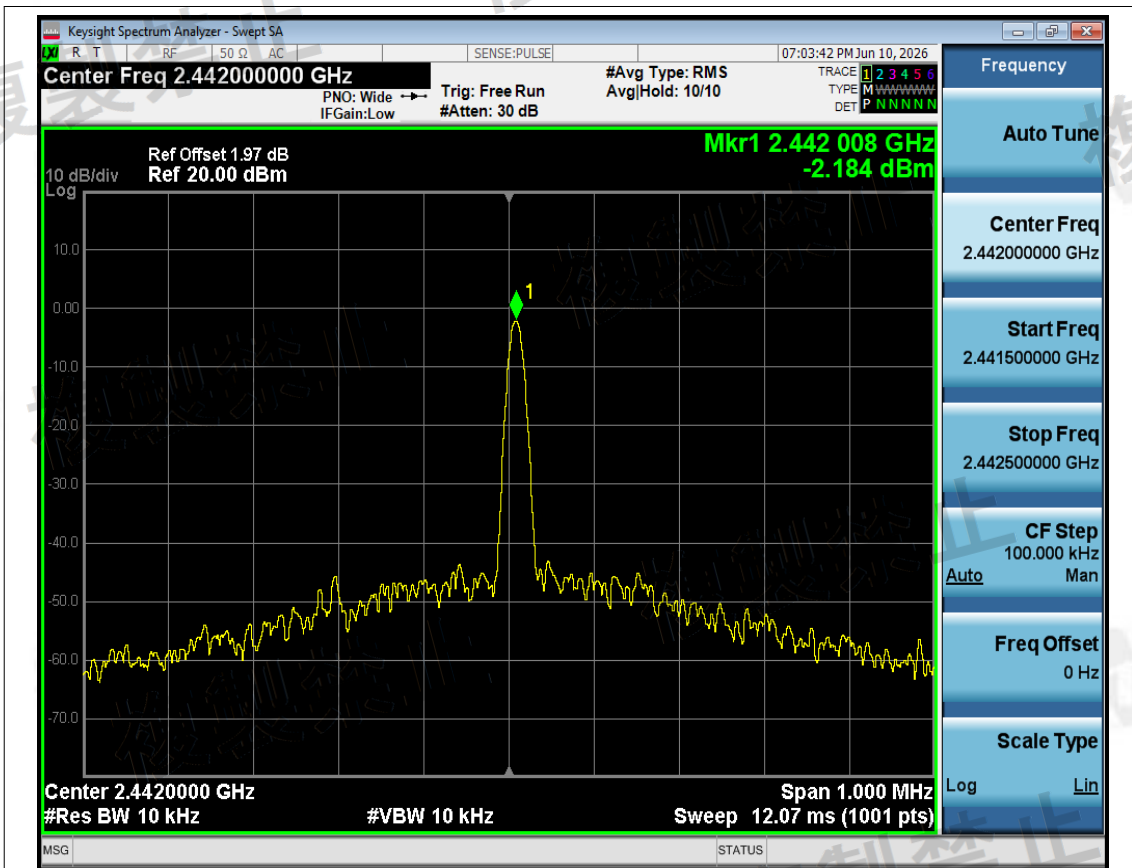

Freq. Error NVNT n40 2442MHz Ant1

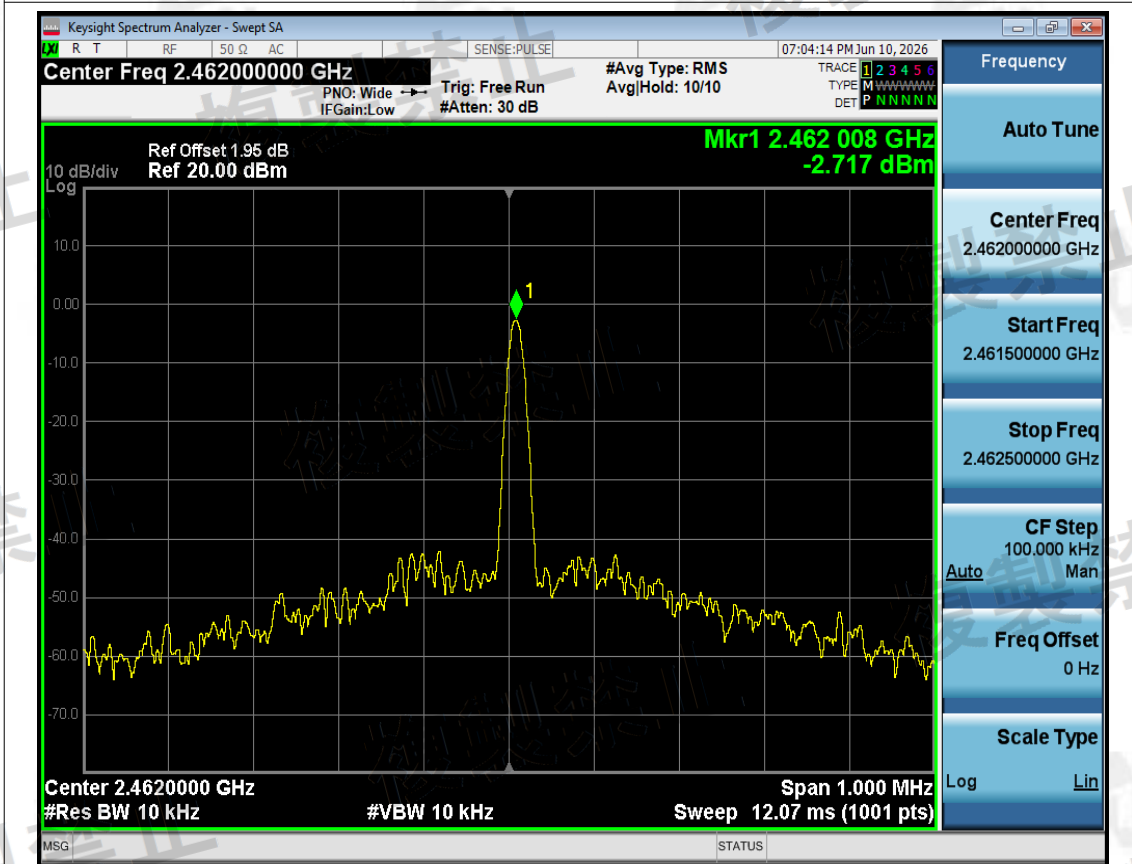


Freq. Error NVNT n40 2462MHz Ant1




Antenna Power


Condi tion	Mo de	Freque ncy (MHz)	Anten na	Power (dBm/M Hz)	Power (mW/M Hz)	Limit (mW/M Hz)	Declar ed Power (mW/M Hz)	Tolera nce (%)	Low er Limi t (%)	Upp er Limi t (%)	Verdi ct
NVNT	b	2412	Ant1	0.76	1.191	10	2	-40.44	-	20	Pass
NVNT	b	2442	Ant1	-1.06	0.783	10	2	-60.83	-	20	Pass
NVNT	b	2472	Ant1	-0.22	0.951	10	2	-52.47	-	20	Pass
NVNT	g	2412	Ant1	0.47	1.114	10	1	11.43	-	20	Pass
NVNT	g	2442	Ant1	-1.37	0.729	10	1	-27.05	-	20	Pass
NVNT	g	2472	Ant1	-1.08	0.78	10	1	-22.02	-	20	Pass
NVNT	n20	2412	Ant1	0.44	1.107	10	1	10.66	-	20	Pass
NVNT	n20	2442	Ant1	-1.92	0.643	10	1	-35.73	-	20	Pass
NVNT	n20	2472	Ant1	-0.76	0.839	10	1	-16.05	-	20	Pass
NVNT	n40	2422	Ant1	-4.07	0.392	5	0.5	-21.65	-	20	Pass
NVNT	n40	2442	Ant1	-4.37	0.366	5	0.5	-26.88	-	20	Pass
NVNT	n40	2462	Ant1	-3.48	0.449	5	0.5	-10.25	-	20	Pass

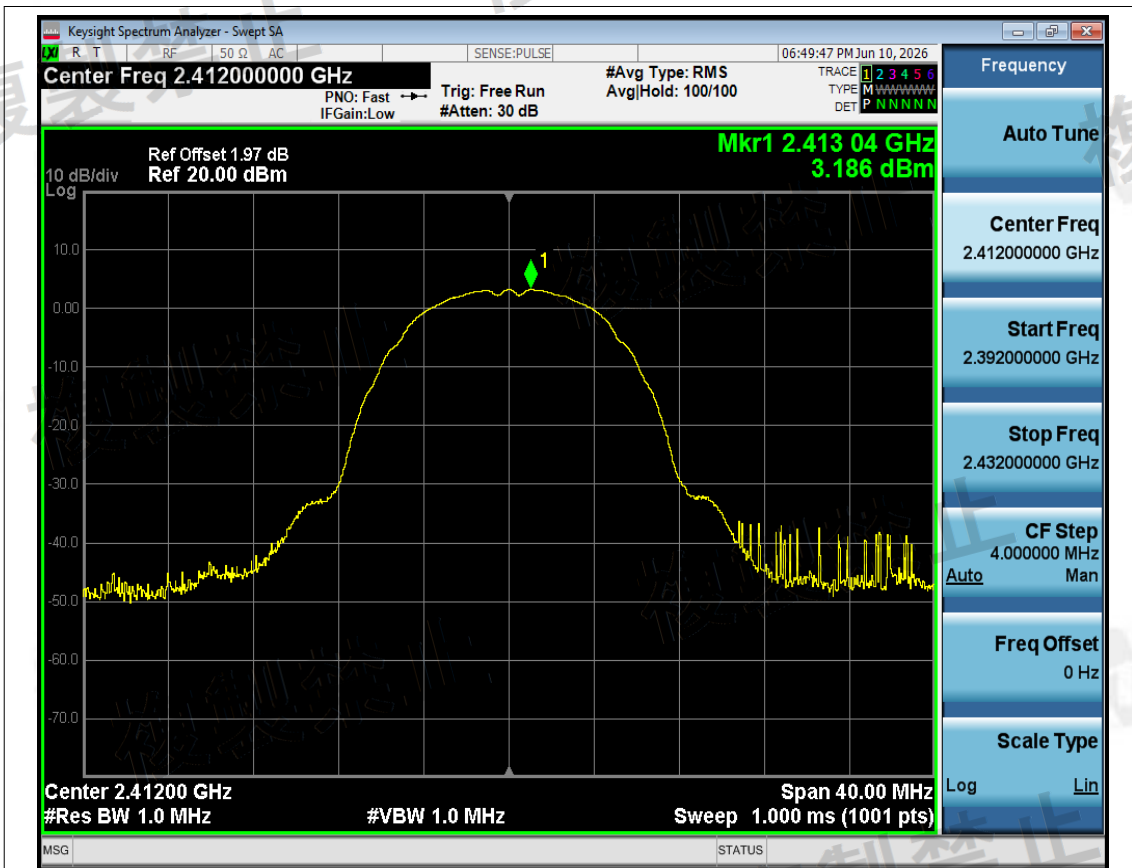


Power NVNT b 2412MHz Ant1 Pre Scan

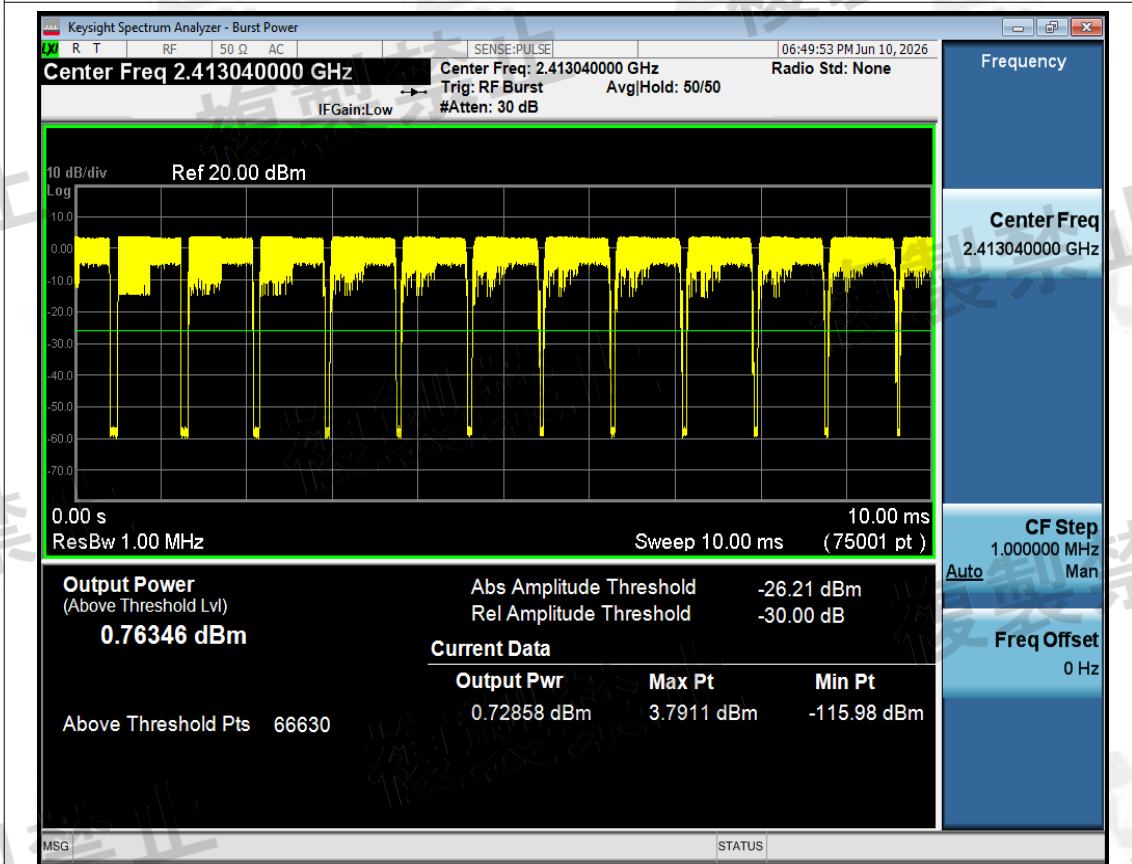


Power NVNT b 2412MHz Ant1 Zero Span

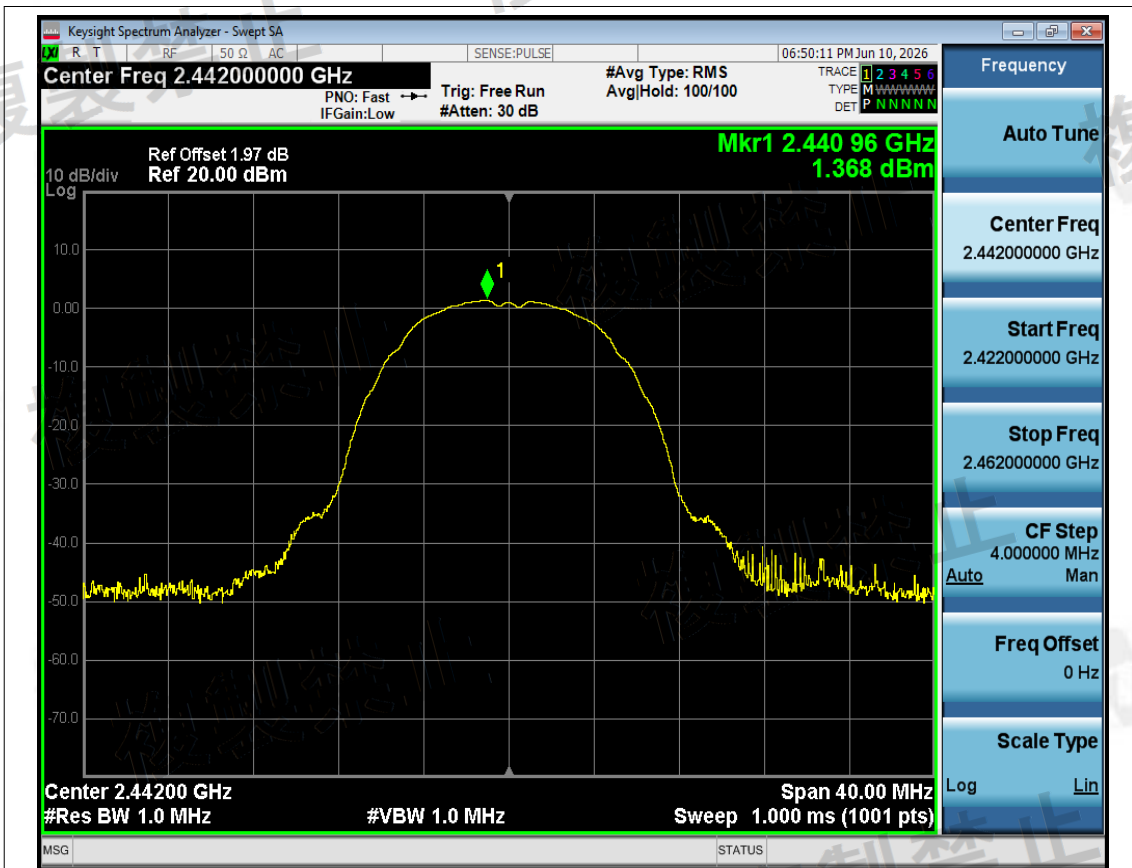


Power NVNT b 2442MHz Ant1 Pre Scan

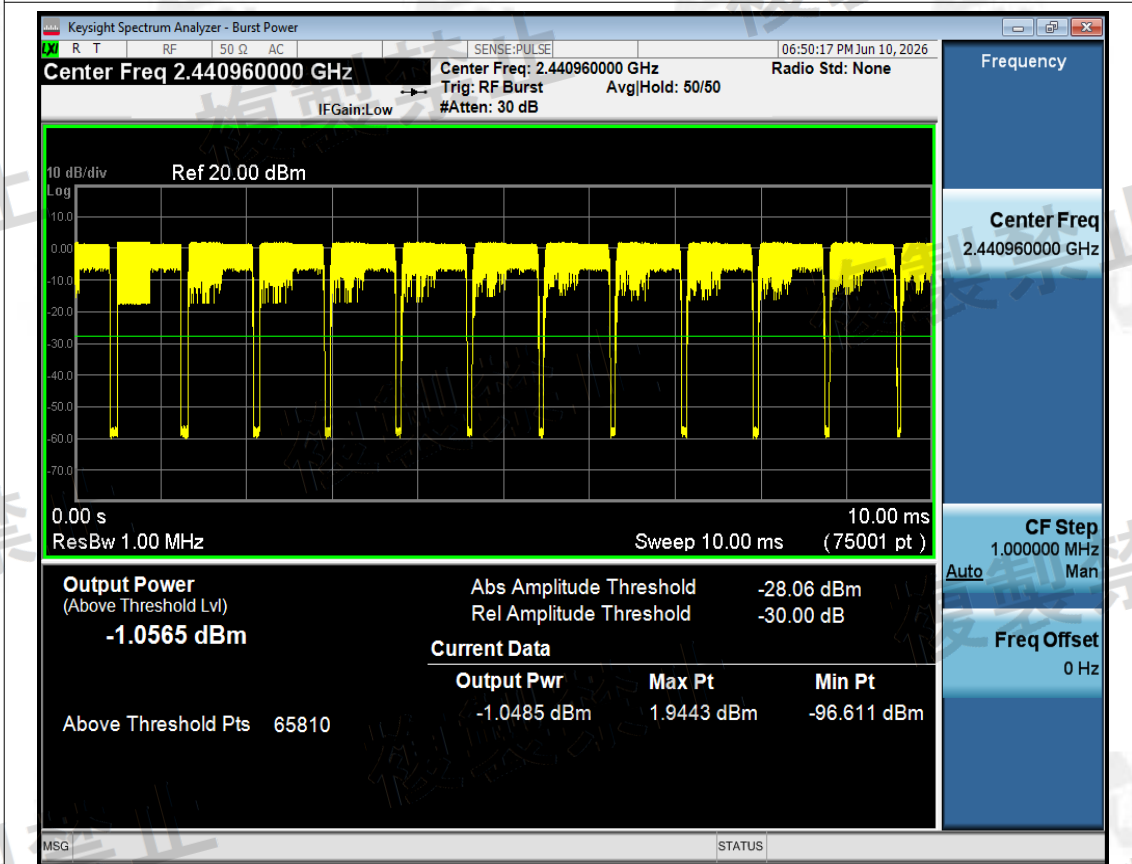


Power NVNT b 2442MHz Ant1 Zero Span

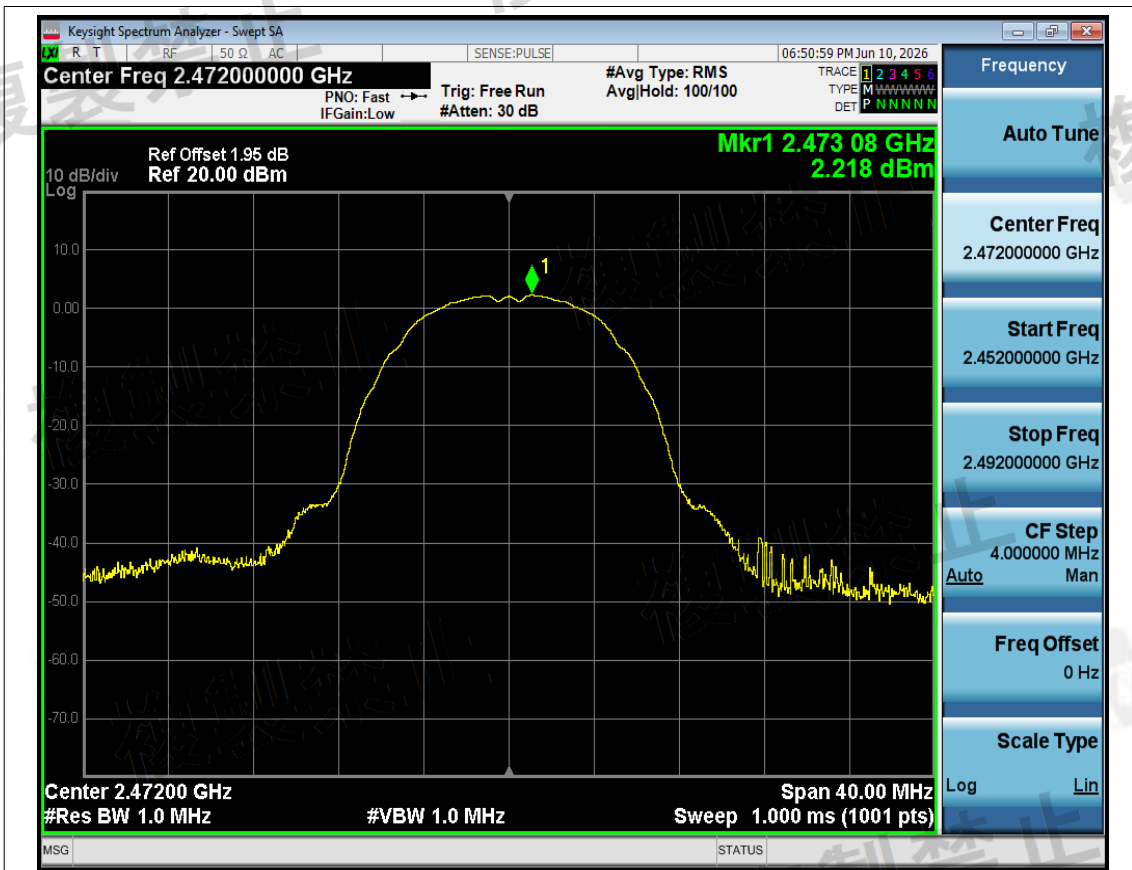


Power NVNT b 2472MHz Ant1 Pre Scan

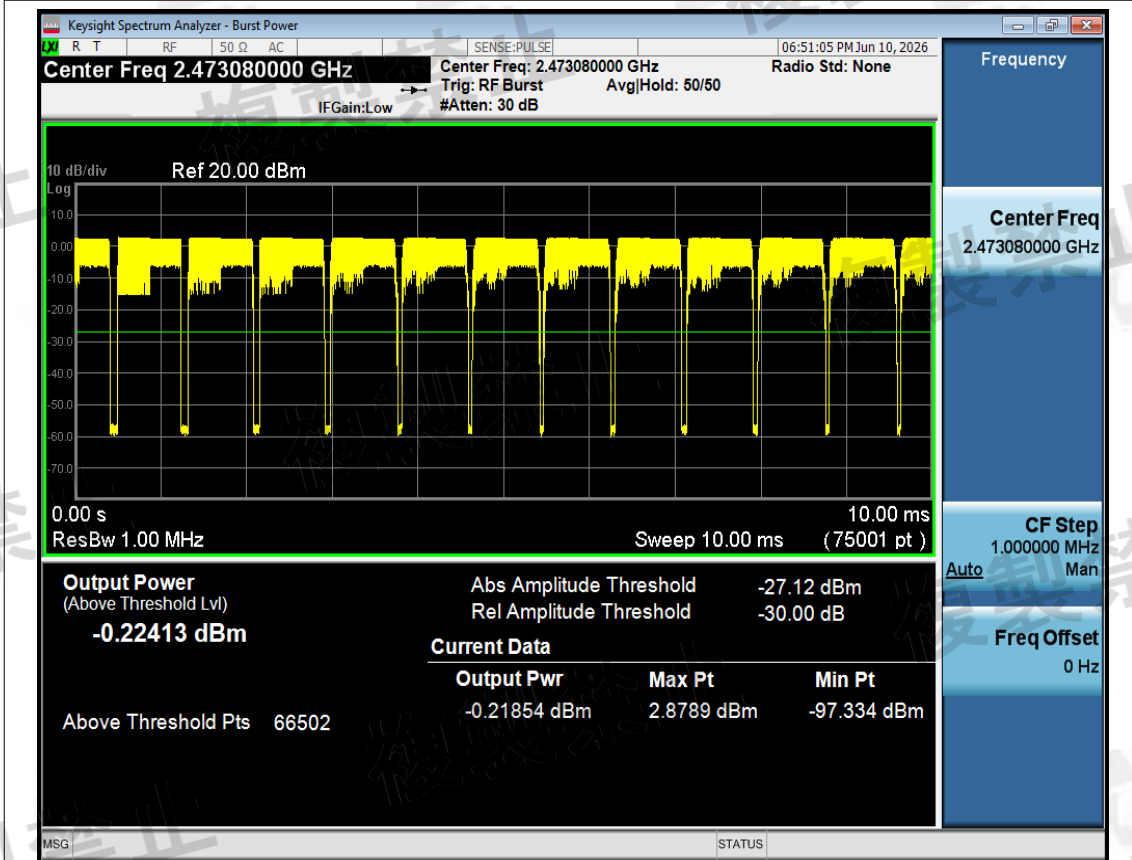

Power NVNT b 2472MHz Ant1 Zero Span

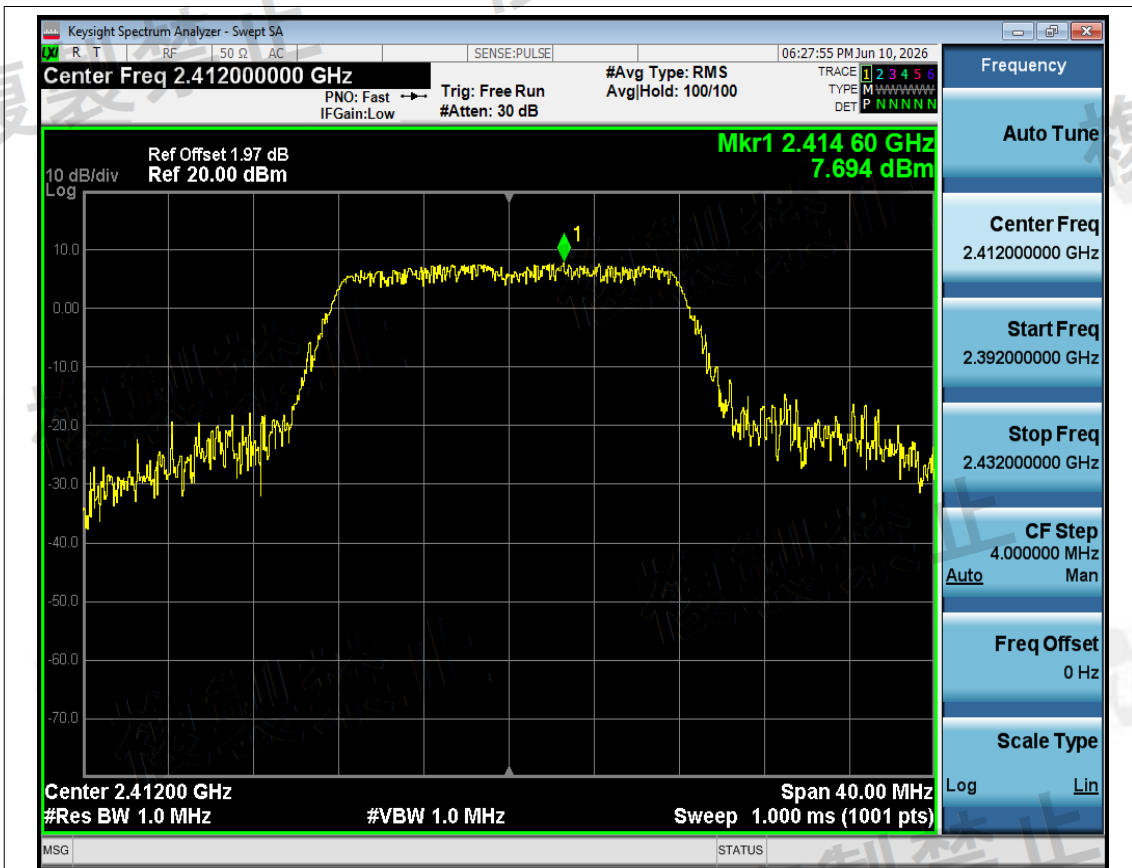


Power NVNT g 2412MHz Ant1 Pre Scan

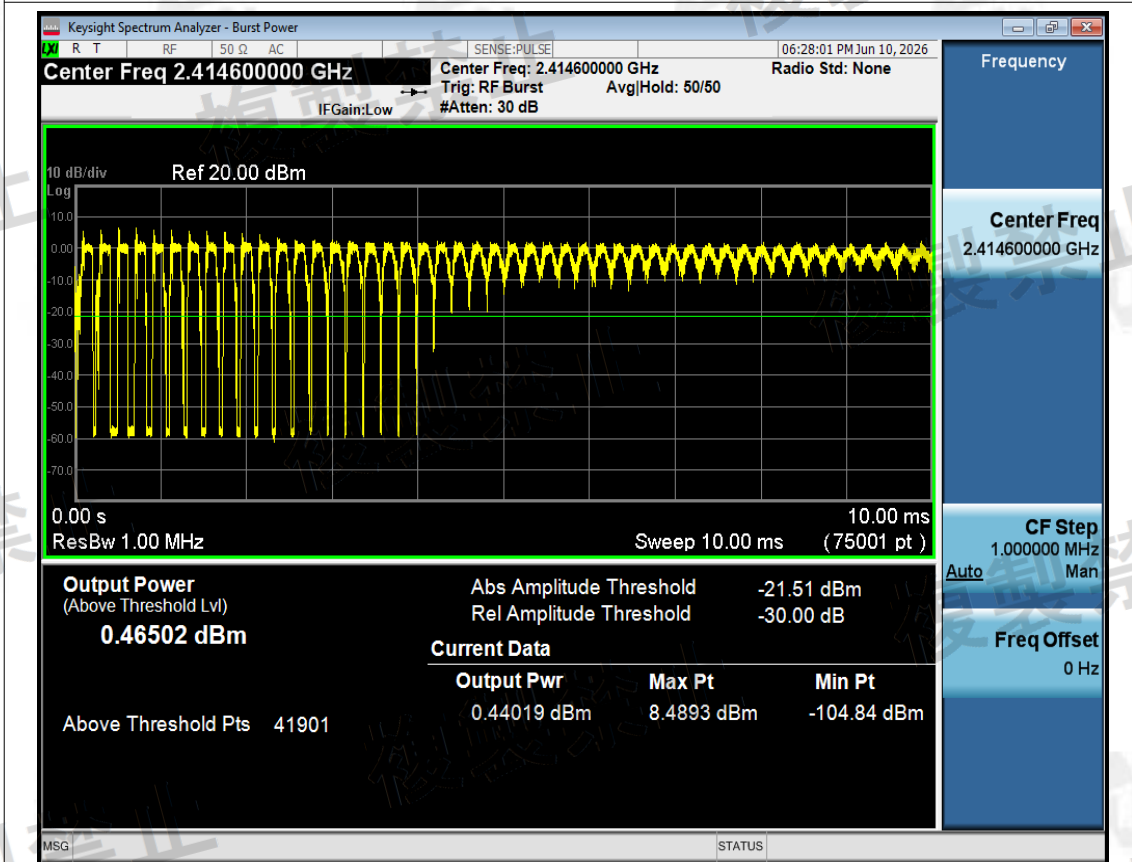

Power NVNT g 2412MHz Ant1 Zero Span




Power NVNT g 2442MHz Ant1 Pre Scan

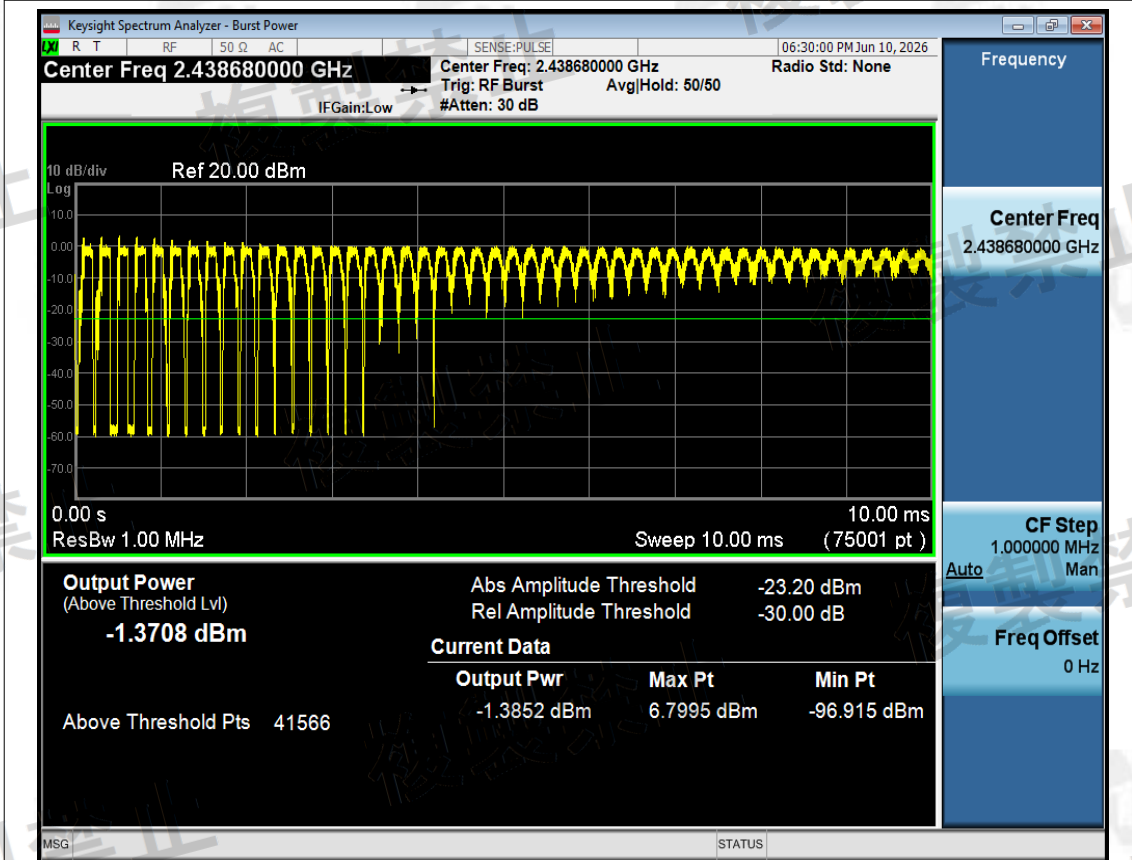


Power NVNT g 2442MHz Ant1 Zero Span




Power NVNT g 2472MHz Ant1 Pre Scan

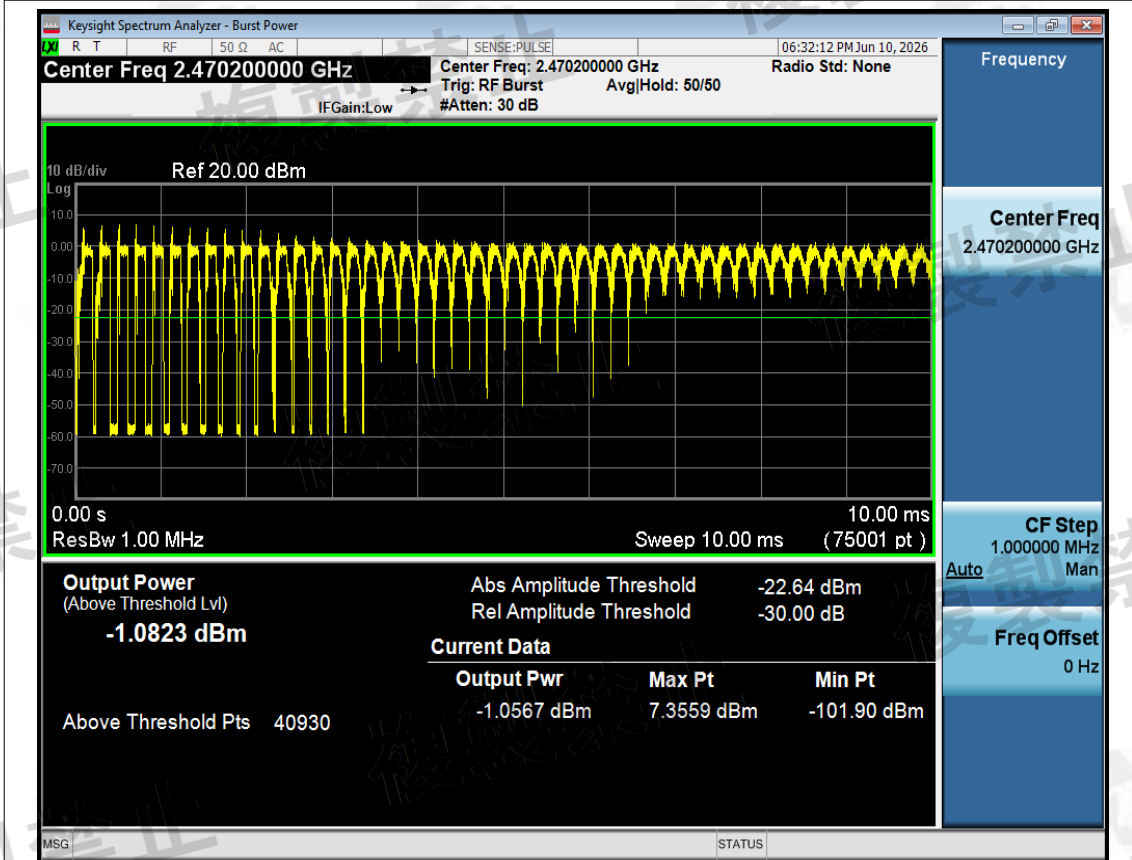

Power NVNT g 2472MHz Ant1 Zero Span

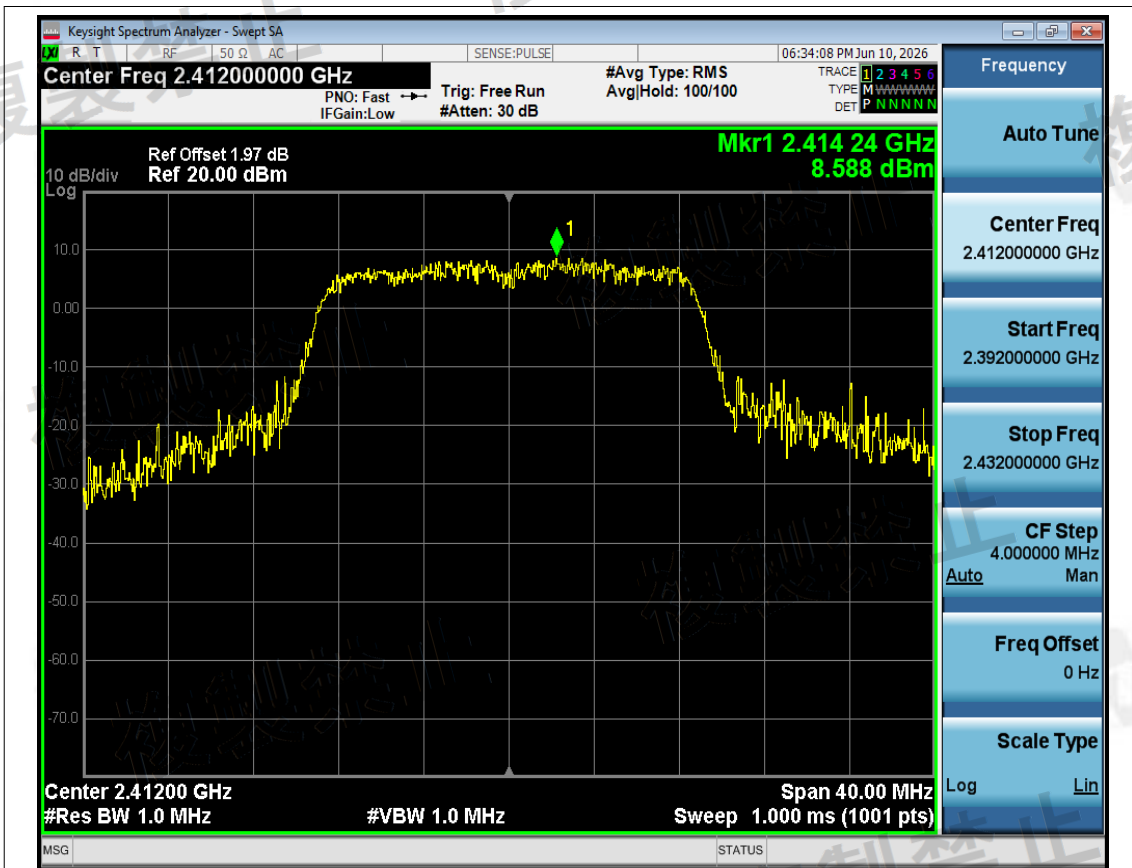


Power NVNT n20 2412MHz Ant1 Pre Scan

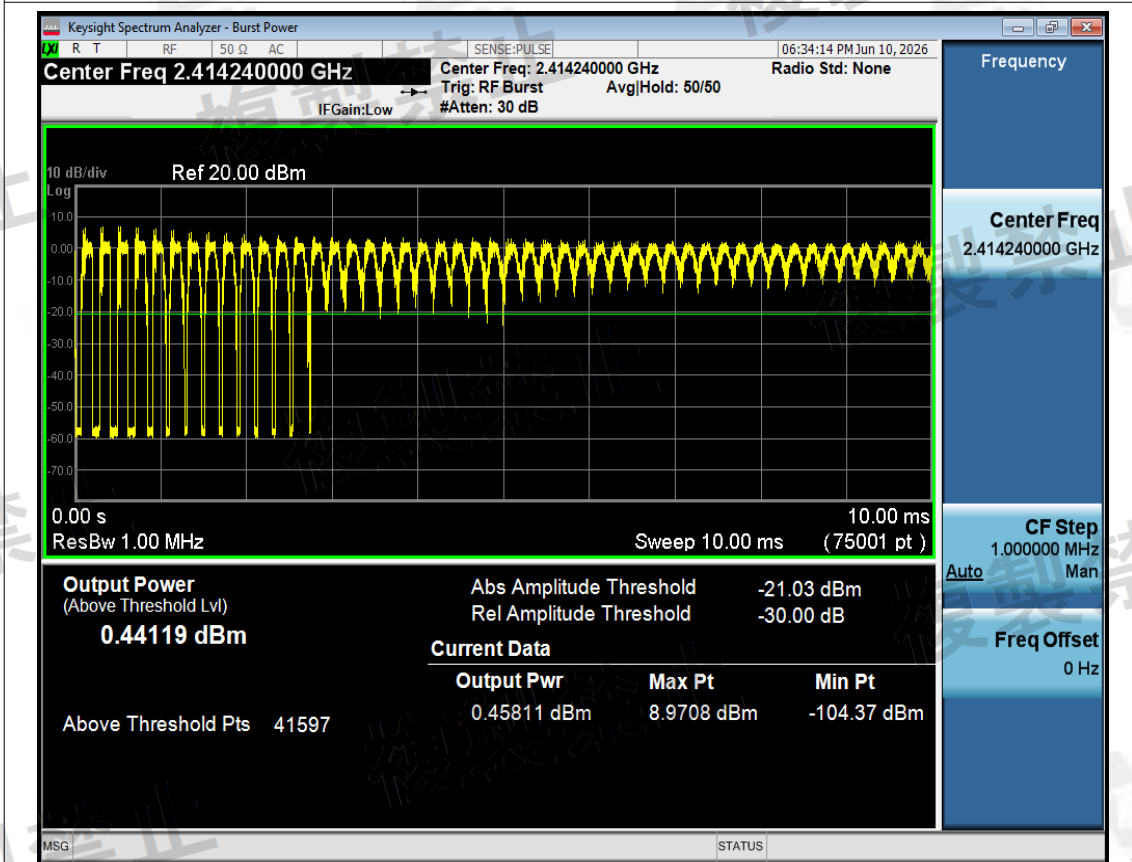


Power NVNT n20 2412MHz Ant1 Zero Span




Power NVNT n20 2442MHz Ant1 Pre Scan

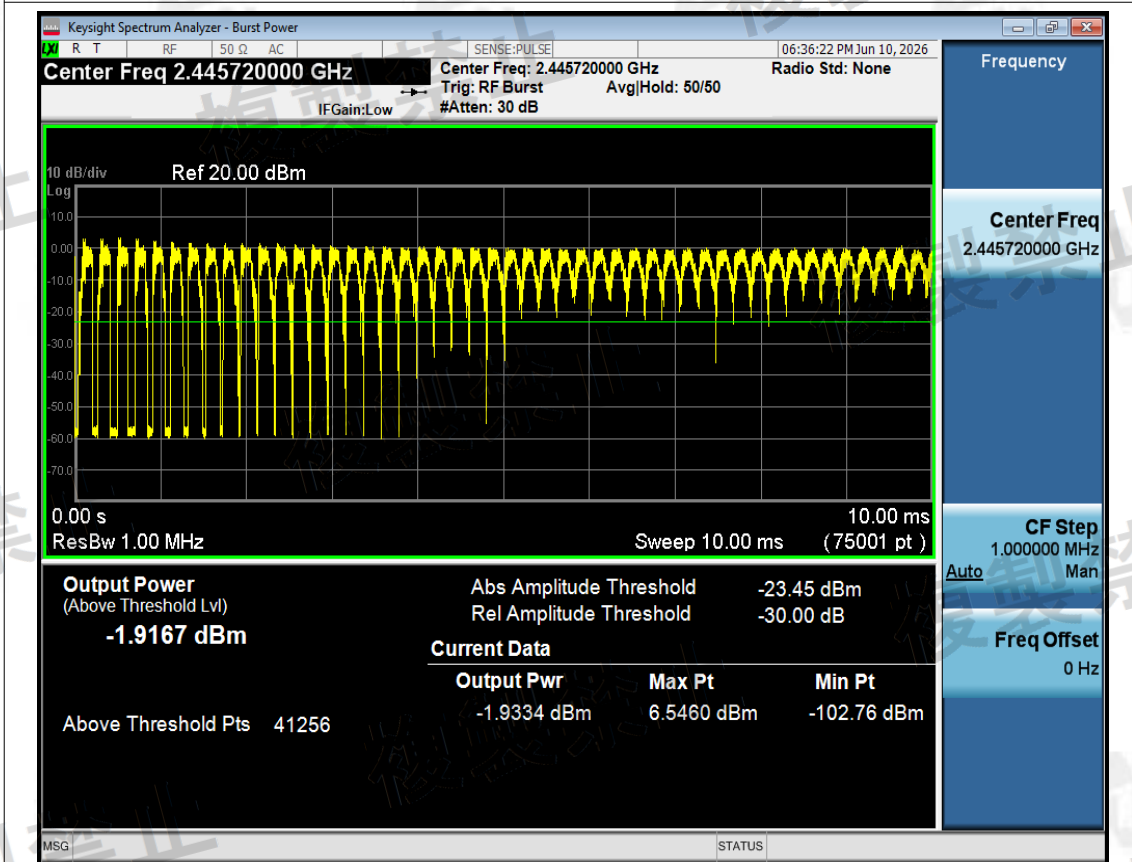

Power NVNT n20 2442MHz Ant1 Zero Span

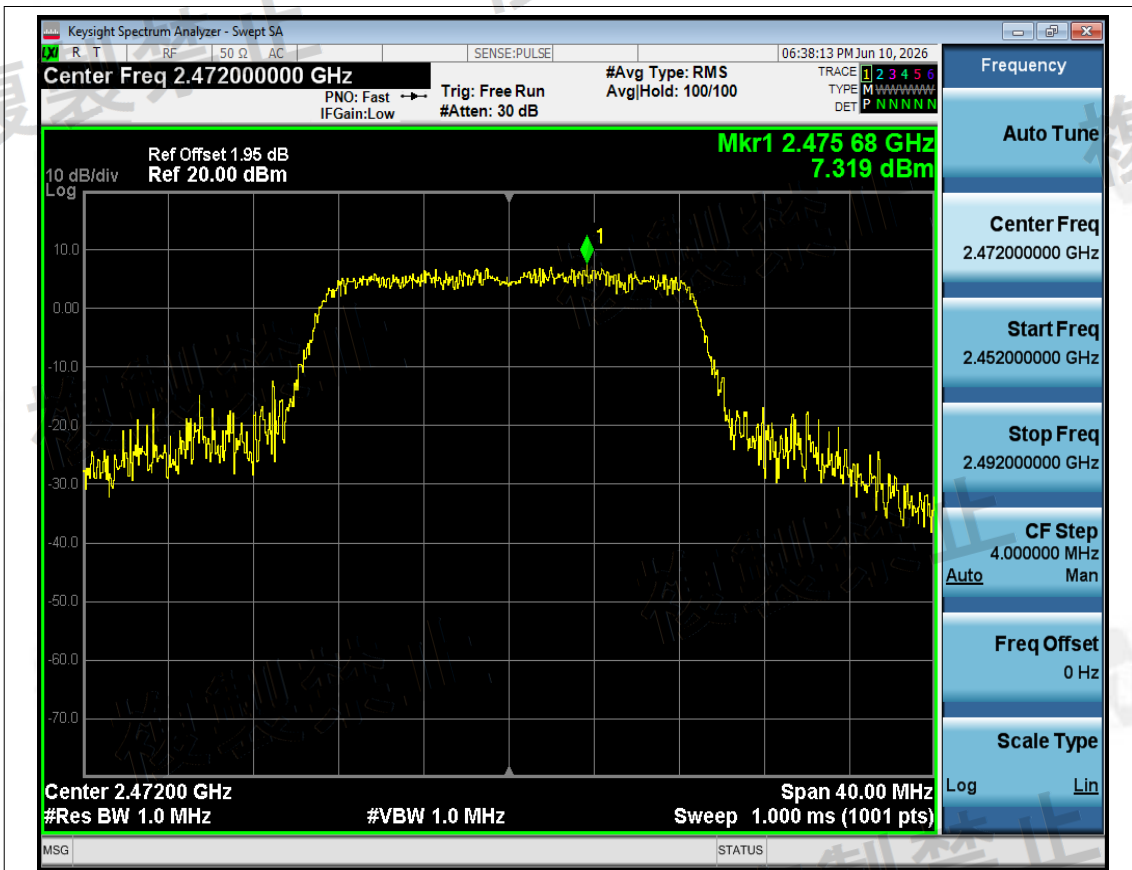


Power NVNT n20 2472MHz Ant1 Pre Scan

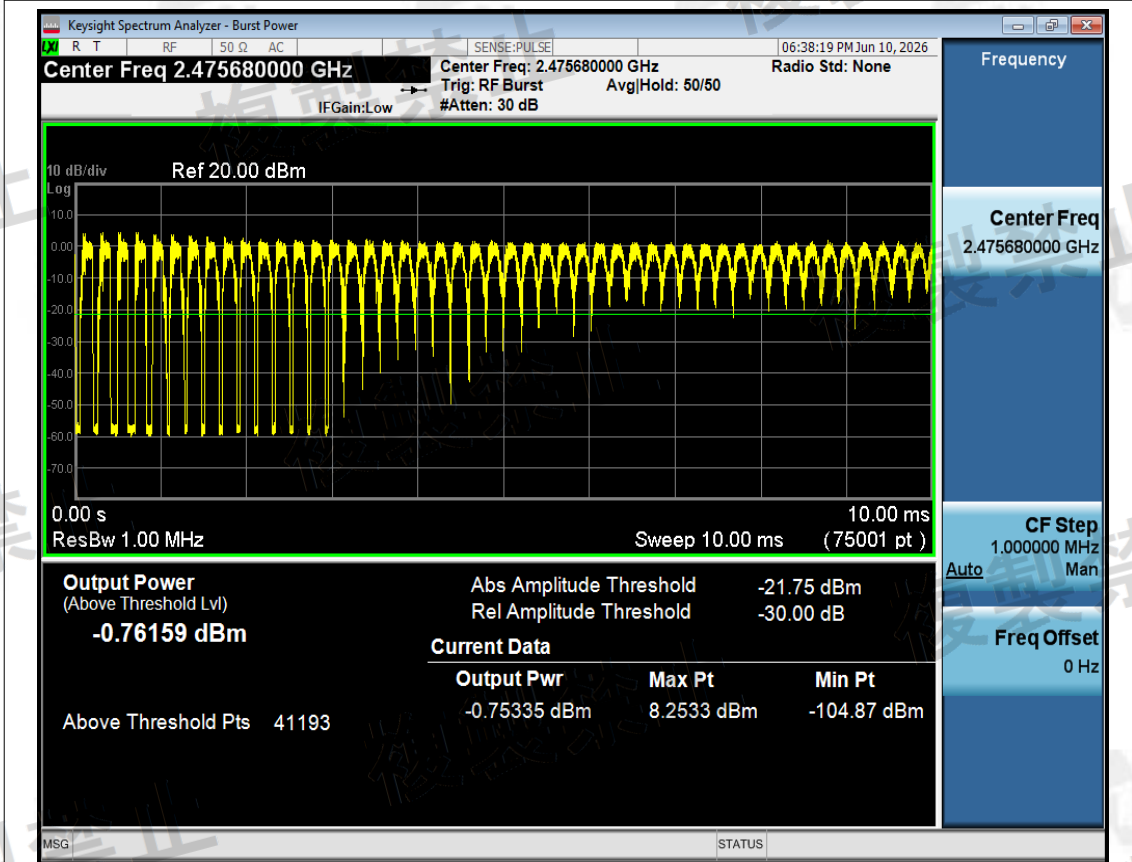

Power NVNT n20 2472MHz Ant1 Zero Span




Power NVNT n40 2422MHz Ant1 Pre Scan

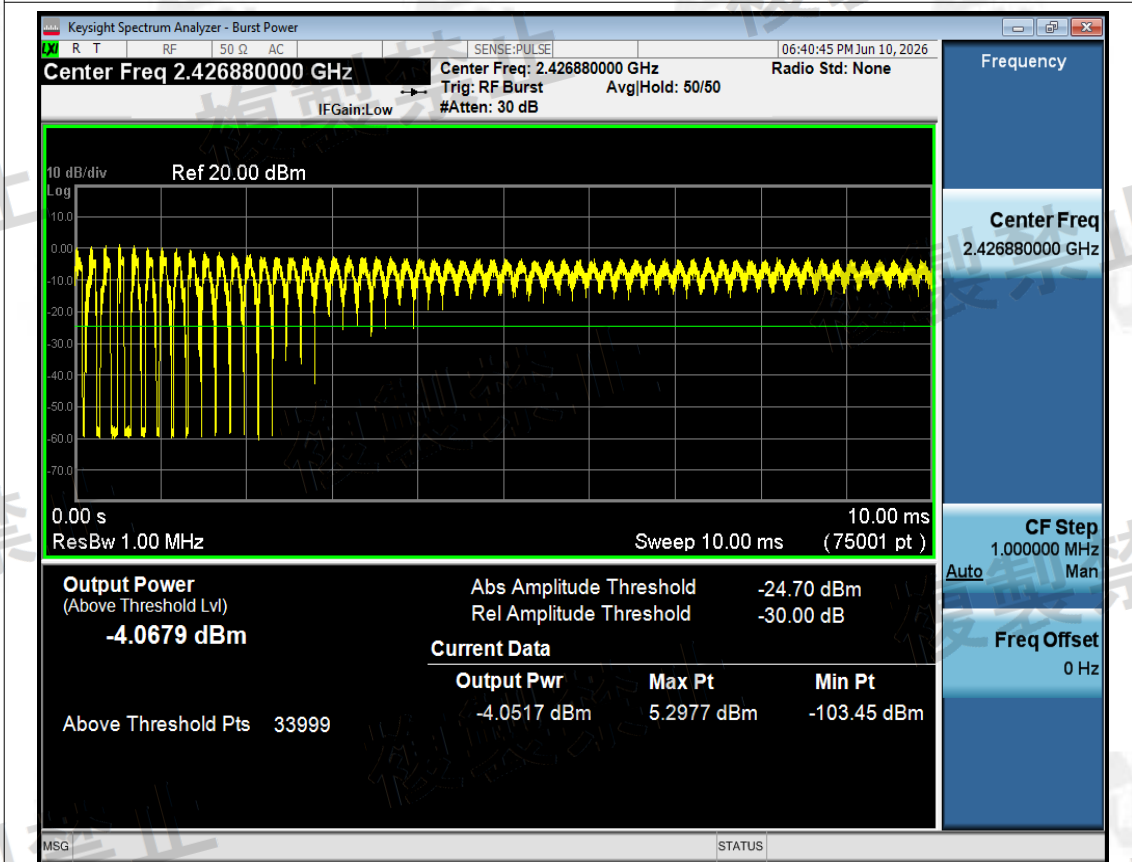

Power NVNT n40 2422MHz Ant1 Zero Span




Power NVNT n40 2442MHz Ant1 Pre Scan

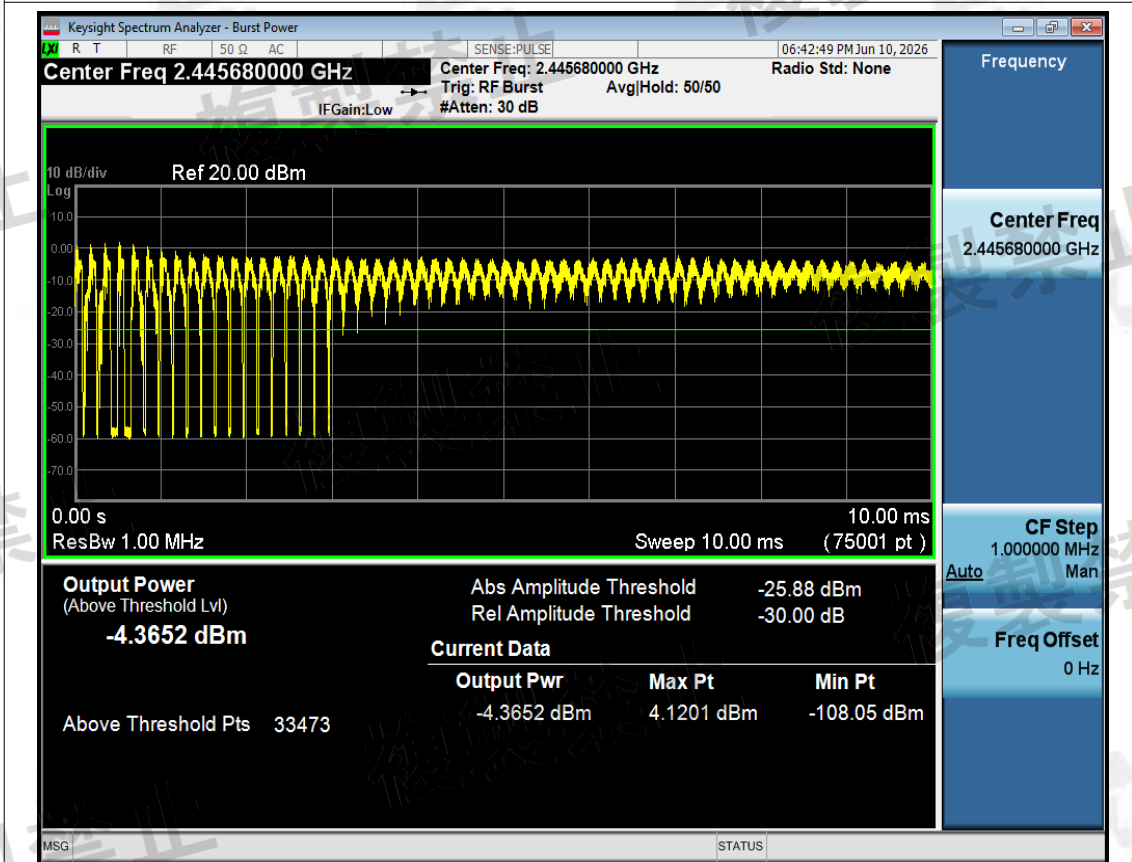

Power NVNT n40 2442MHz Ant1 Zero Span



Power NVNT n40 2462MHz Ant1 Pre Scan

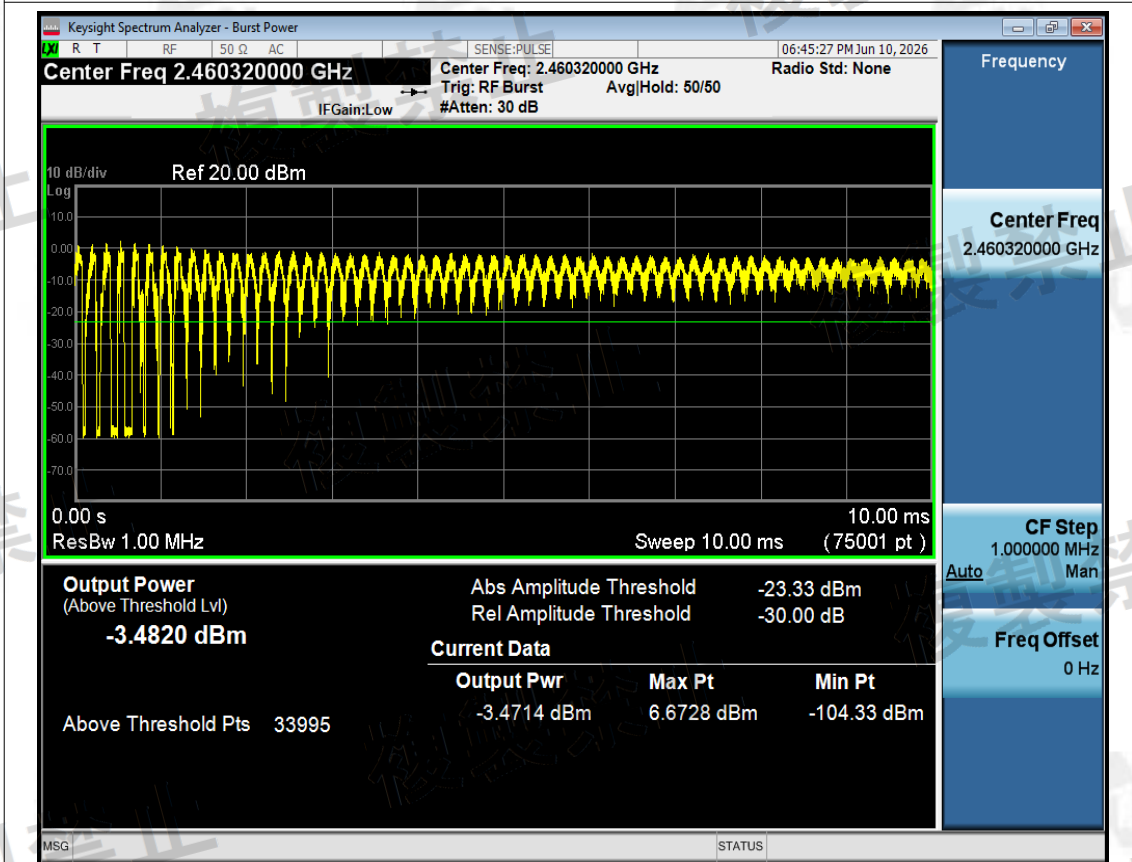

Power NVNT n40 2462MHz Ant1 Zero Span




EIRP Power

Condi tion	Mod e	Frequen cy (MHz)	Anten na	Power (dBm/M Hz)	Power (mW/M Hz)	Gai n (dB i)	EIRP (dBm/M Hz)	EIRP (mW/M Hz)	Limit (dBm/M Hz)	Verdi ct
NVNT	b	2412	Ant1	0.76	1.191	1.6	2.36	1.722	12.14	Pass
NVNT	b	2442	Ant1	-1.06	0.783	1.6	0.54	1.132	12.14	Pass
NVNT	b	2472	Ant1	-0.22	0.951	1.6	1.38	1.374	12.14	Pass
NVNT	g	2412	Ant1	0.47	1.114	1.6	2.07	1.611	12.14	Pass
NVNT	g	2442	Ant1	-1.37	0.729	1.6	0.23	1.054	12.14	Pass
NVNT	g	2472	Ant1	-1.08	0.78	1.6	0.52	1.127	12.14	Pass
NVNT	n20	2412	Ant1	0.44	1.107	1.6	2.04	1.600	12.14	Pass
NVNT	n20	2442	Ant1	-1.92	0.643	1.6	-0.32	0.929	12.14	Pass
NVNT	n20	2472	Ant1	-0.76	0.839	1.6	0.84	1.213	12.14	Pass
NVNT	n40	2422	Ant1	-4.07	0.392	1.6	-2.47	0.566	9.13	Pass
NVNT	n40	2442	Ant1	-4.37	0.366	1.6	-2.77	0.528	9.13	Pass
NVNT	n40	2462	Ant1	-3.48	0.449	1.6	-1.88	0.649	9.13	Pass




Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	Lower Limit (MHz)	Upper Limit (MHz)	Verdict
NVNT	b	2412	Ant1	11.753	N/A	26	Pass
NVNT	b	2442	Ant1	11.777	N/A	26	Pass
NVNT	b	2472	Ant1	11.784	N/A	26	Pass
NVNT	g	2412	Ant1	16.608	N/A	26	Pass
NVNT	g	2442	Ant1	16.601	N/A	26	Pass
NVNT	g	2472	Ant1	16.559	N/A	26	Pass
NVNT	n20	2412	Ant1	17.64	N/A	26	Pass
NVNT	n20	2442	Ant1	17.617	N/A	26	Pass
NVNT	n20	2472	Ant1	17.59	N/A	26	Pass
NVNT	n40	2422	Ant1	35.986	26	40	Pass
NVNT	n40	2442	Ant1	35.893	26	40	Pass
NVNT	n40	2462	Ant1	36.125	26	40	Pass

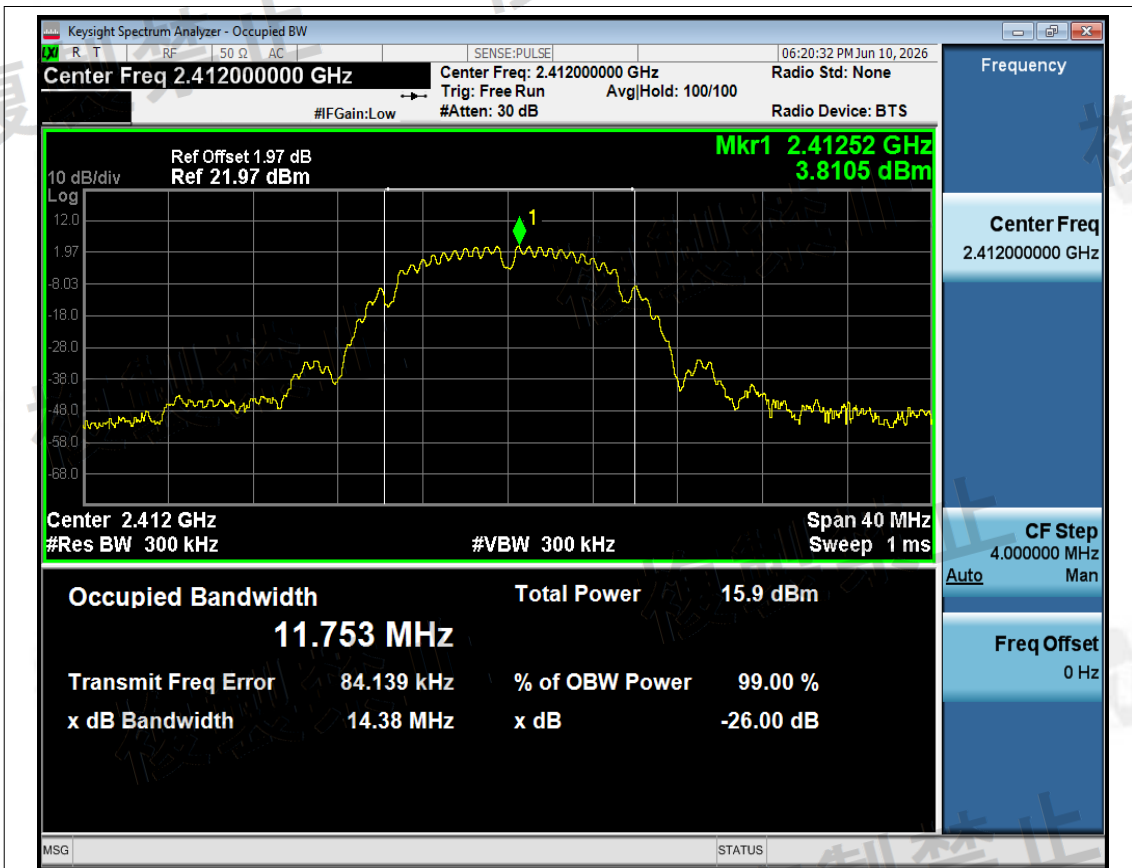


OBW NVNT b 2412MHz Ant1

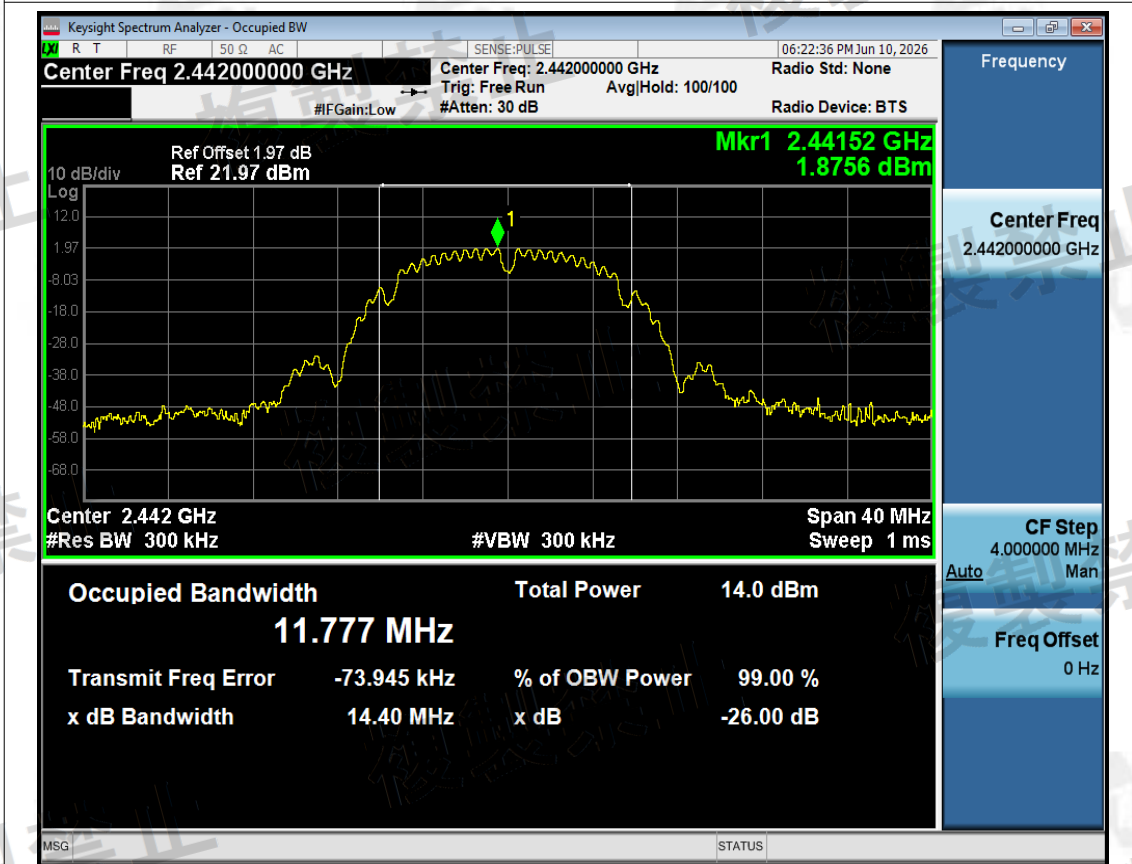


OBW NVNT b 2442MHz Ant1

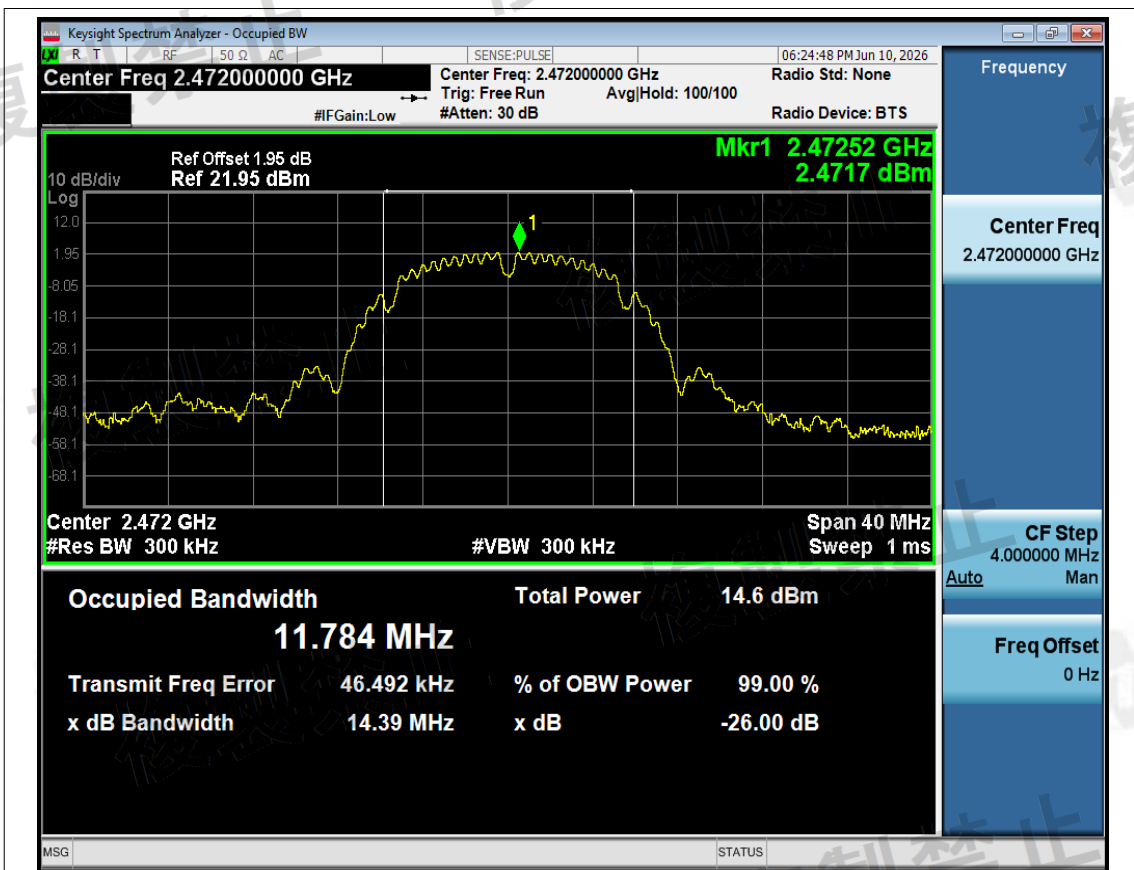


OBW NVNT b 2472MHz Ant1

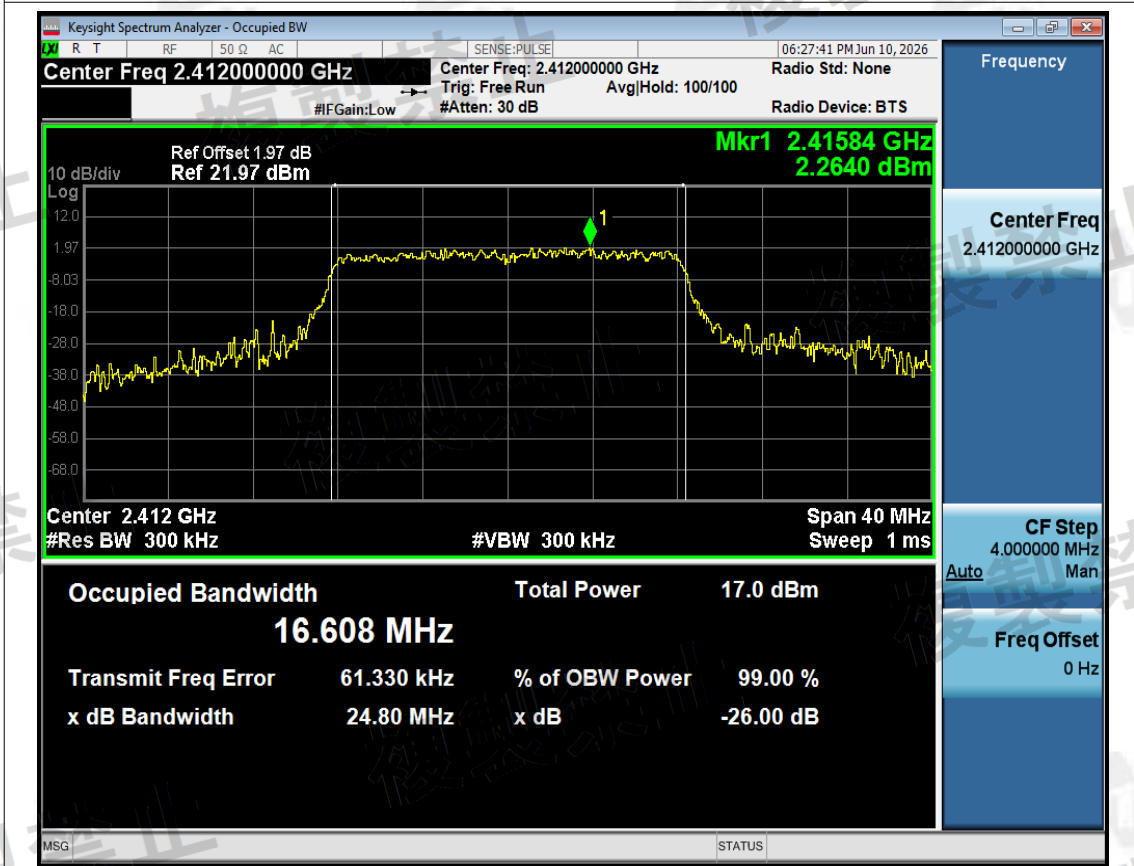


OBW NVNT g 2412MHz Ant1

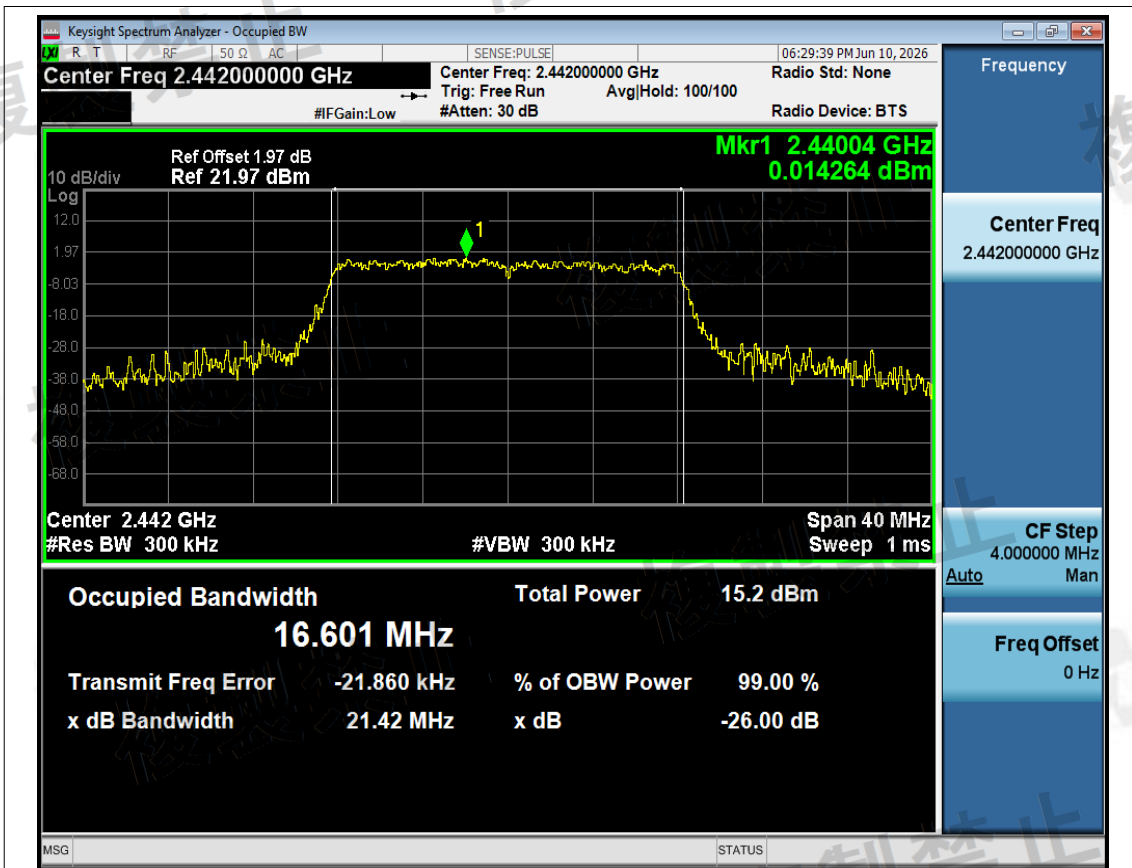


OBW NVNT g 2442MHz Ant1

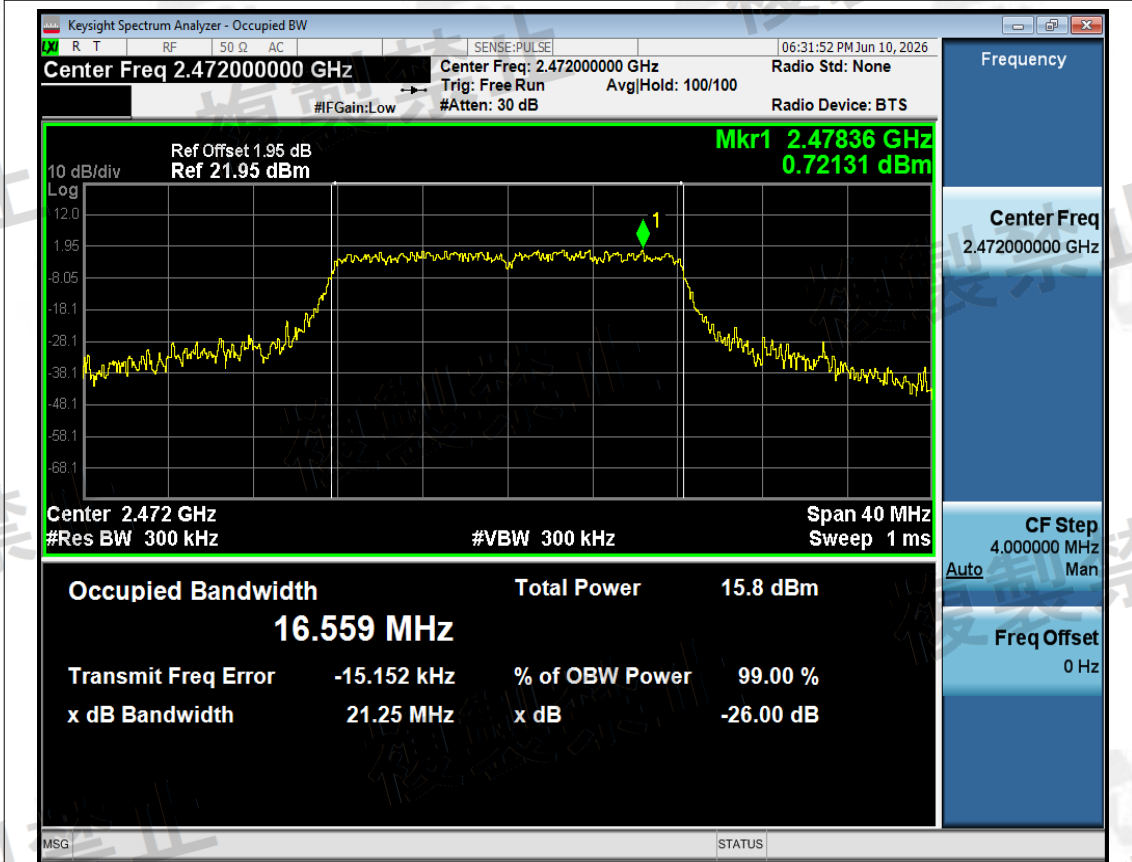

OBW NVNT g 2472MHz Ant1

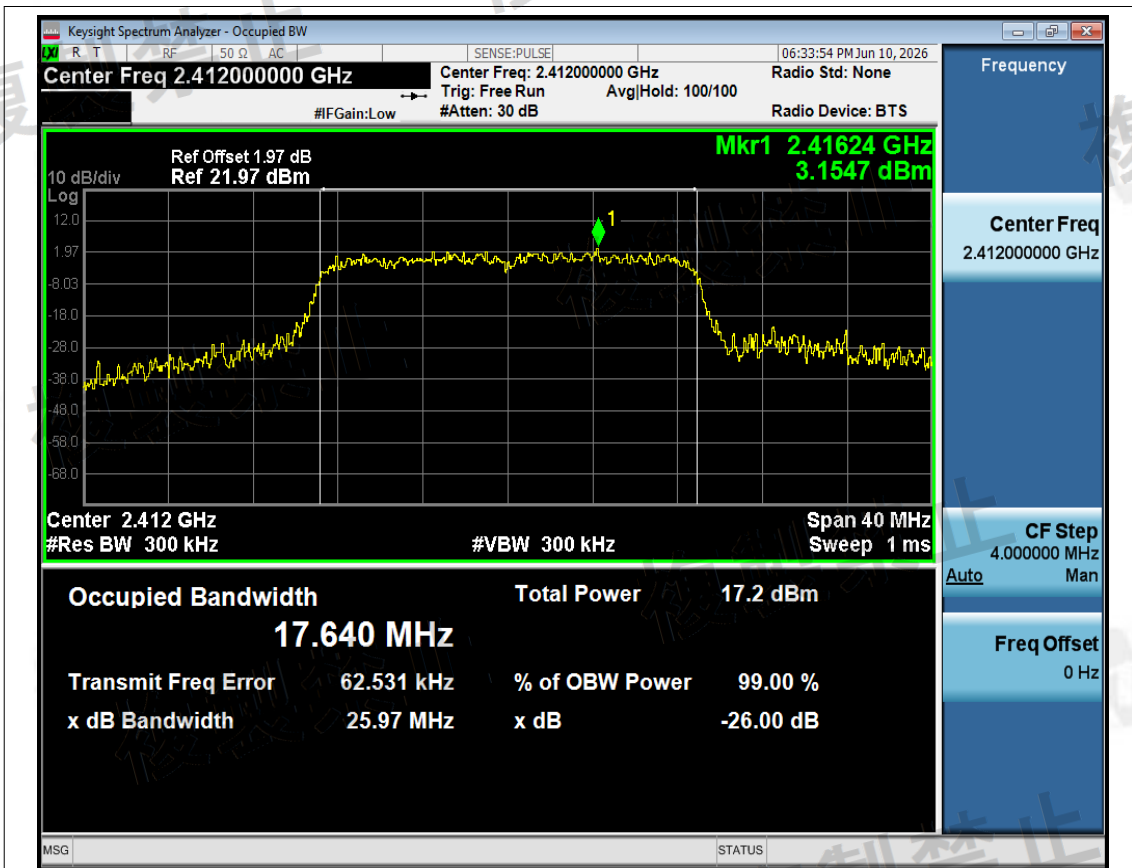

OBW NVNT n20 2412MHz Ant1

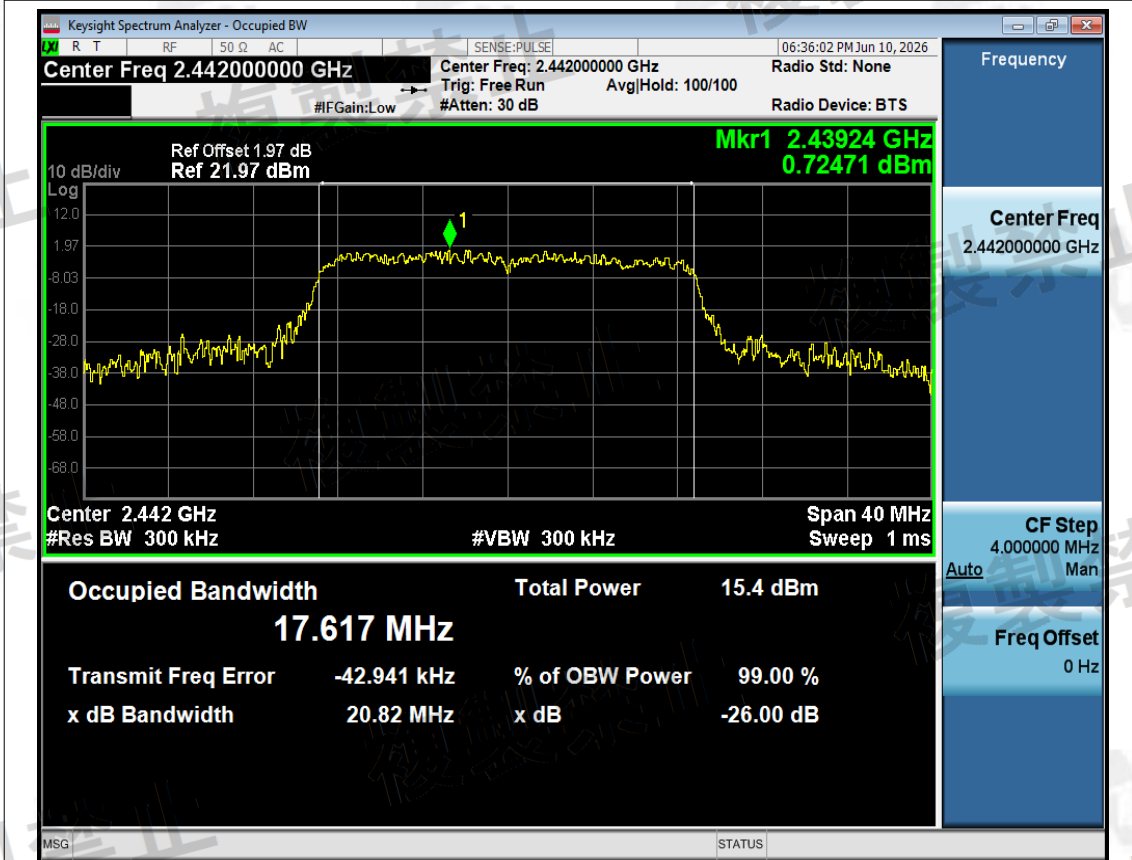

OBW NVNT n20 2442MHz Ant1




OBW NVNT n20 2472MHz Ant1



OBW NVNT n40 2422MHz Ant1



OBW NVNT n40 2442MHz Ant1

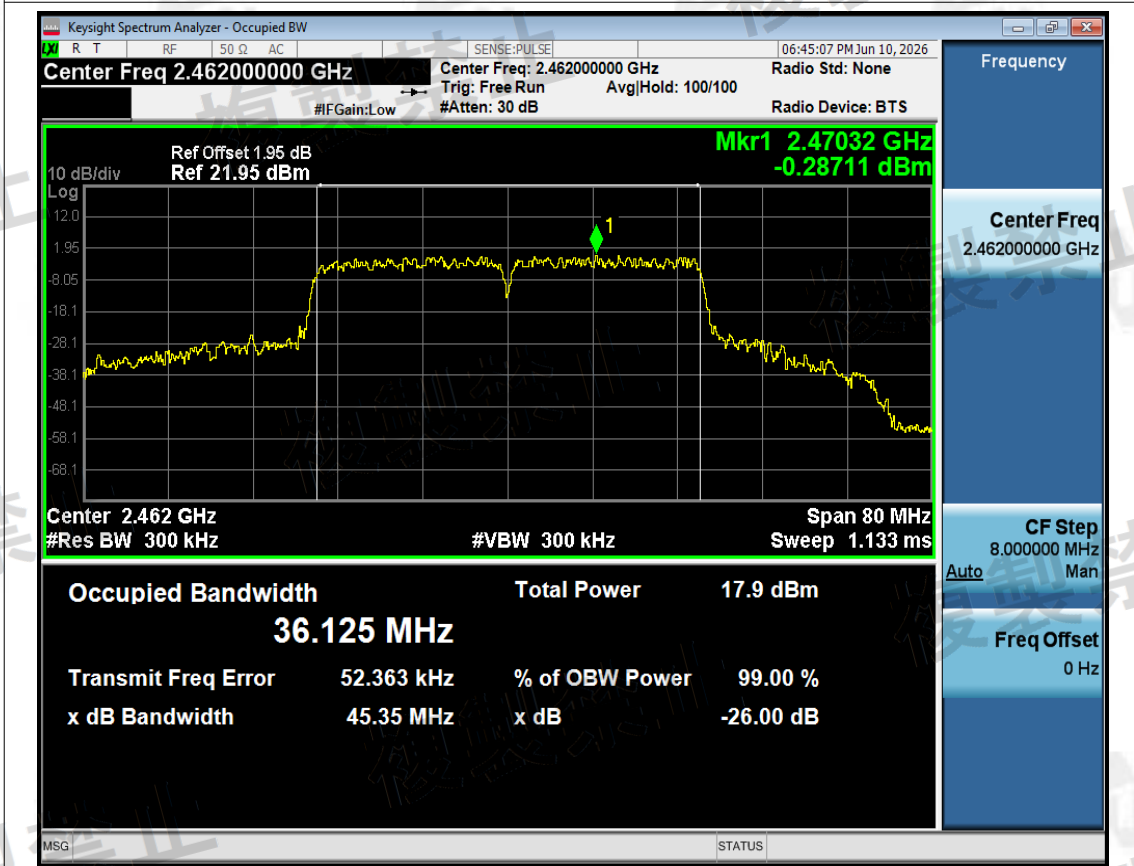


OBW NVNT n40 2462MHz Ant1




Spreading Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	90% OBW (MHz)
NVNT	b	2412	Ant1	8.1883
NVNT	b	2442	Ant1	8.2616
NVNT	b	2472	Ant1	8.2134
NVNT	g	2412	Ant1	14.646
NVNT	g	2442	Ant1	14.589
NVNT	g	2472	Ant1	14.696
NVNT	n20	2412	Ant1	15.207
NVNT	n20	2442	Ant1	15.404
NVNT	n20	2472	Ant1	15.266
NVNT	n40	2422	Ant1	32.122
NVNT	n40	2442	Ant1	31.514
NVNT	n40	2462	Ant1	32.385

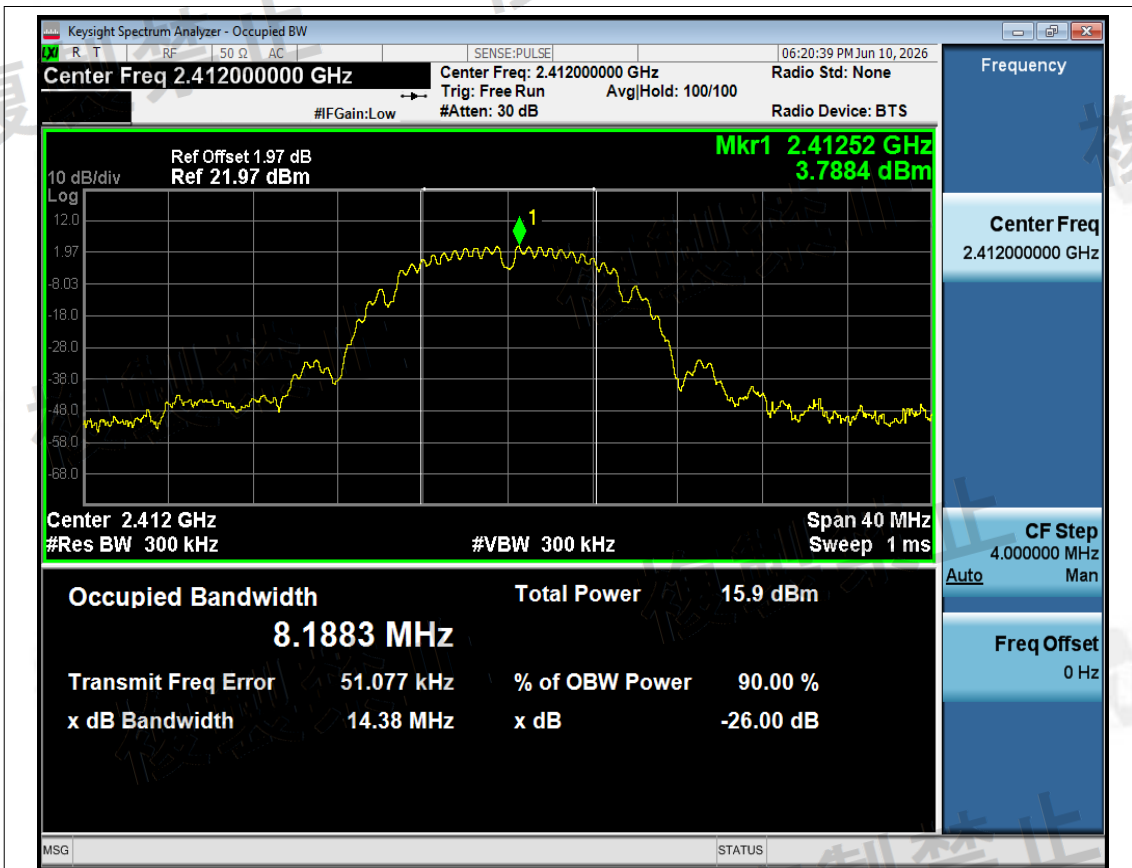


Spreading Bandwidth NVNT b 2412MHz Ant1

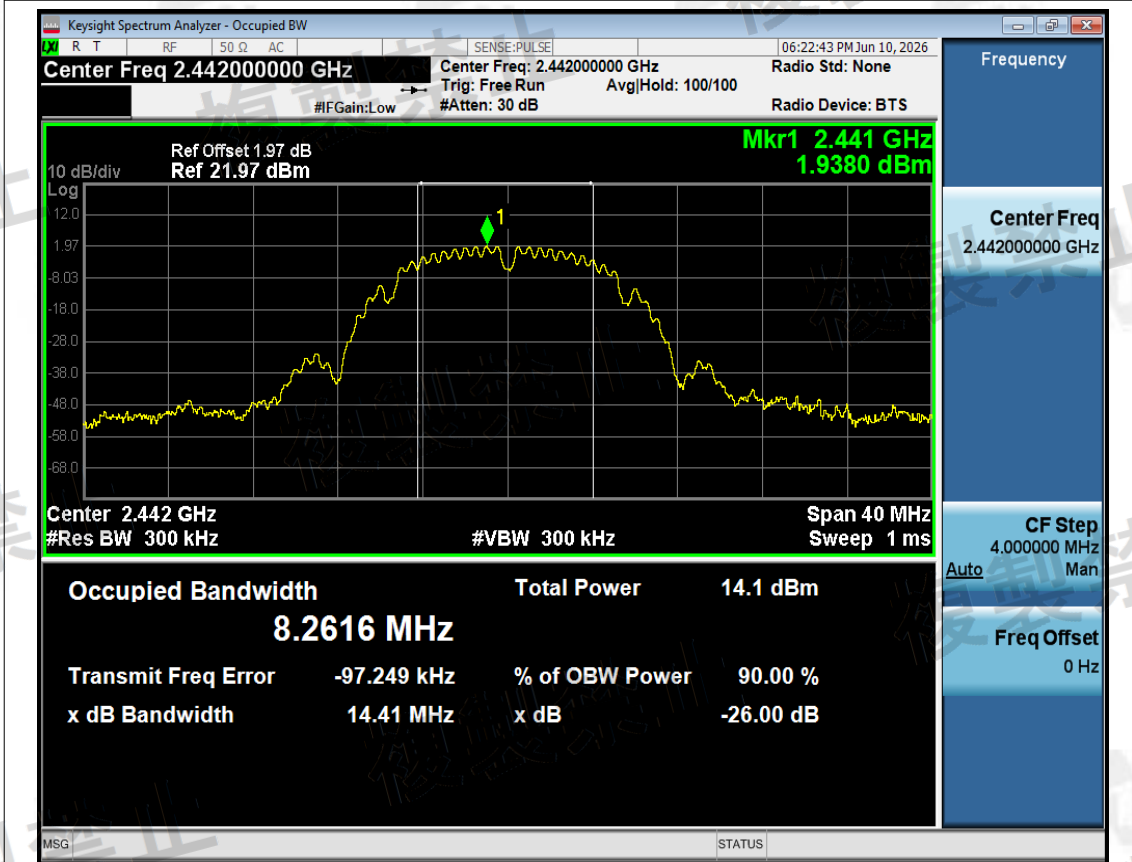

Spreading Bandwidth NVNT b 2442MHz Ant1

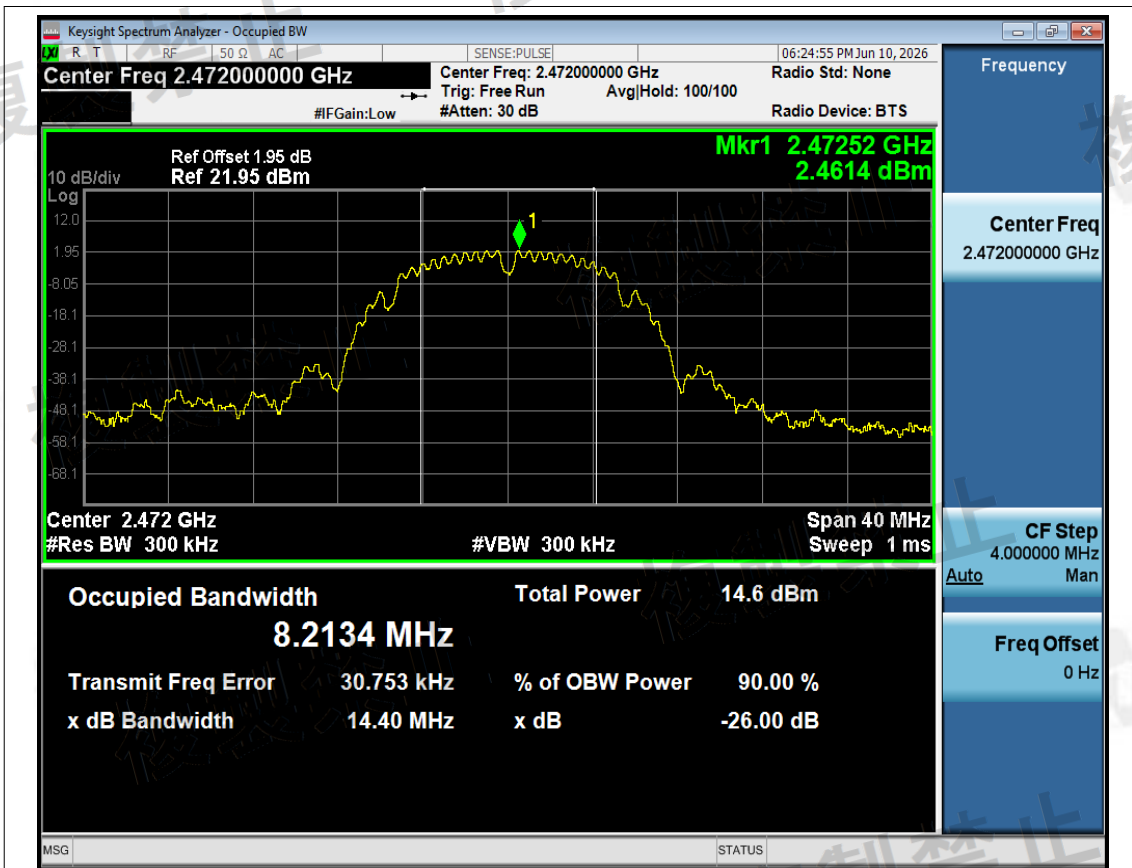

Spreading Bandwidth NVNT b 2472MHz Ant1

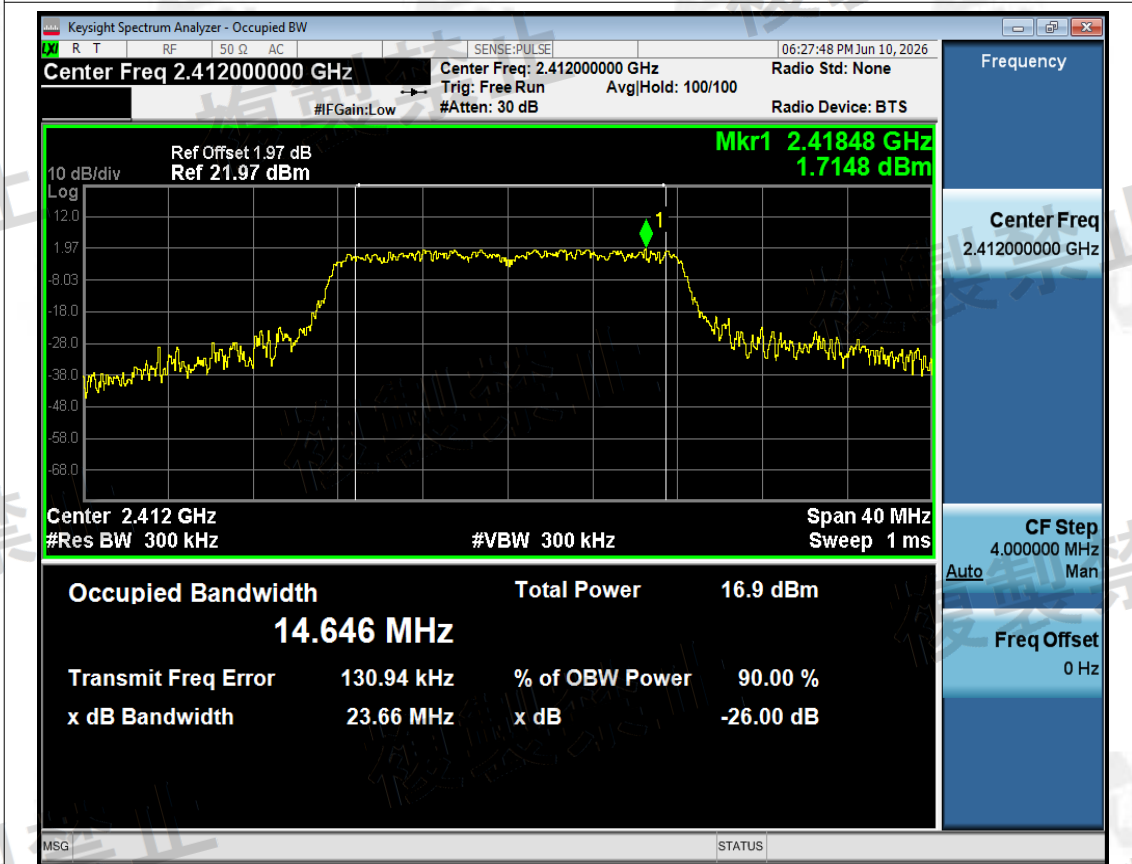


Spreading Bandwidth NVNT g 2412MHz Ant1




Spreading Bandwidth NVNT g 2442MHz Ant1



Spreading Bandwidth NVNT g 2472MHz Ant1

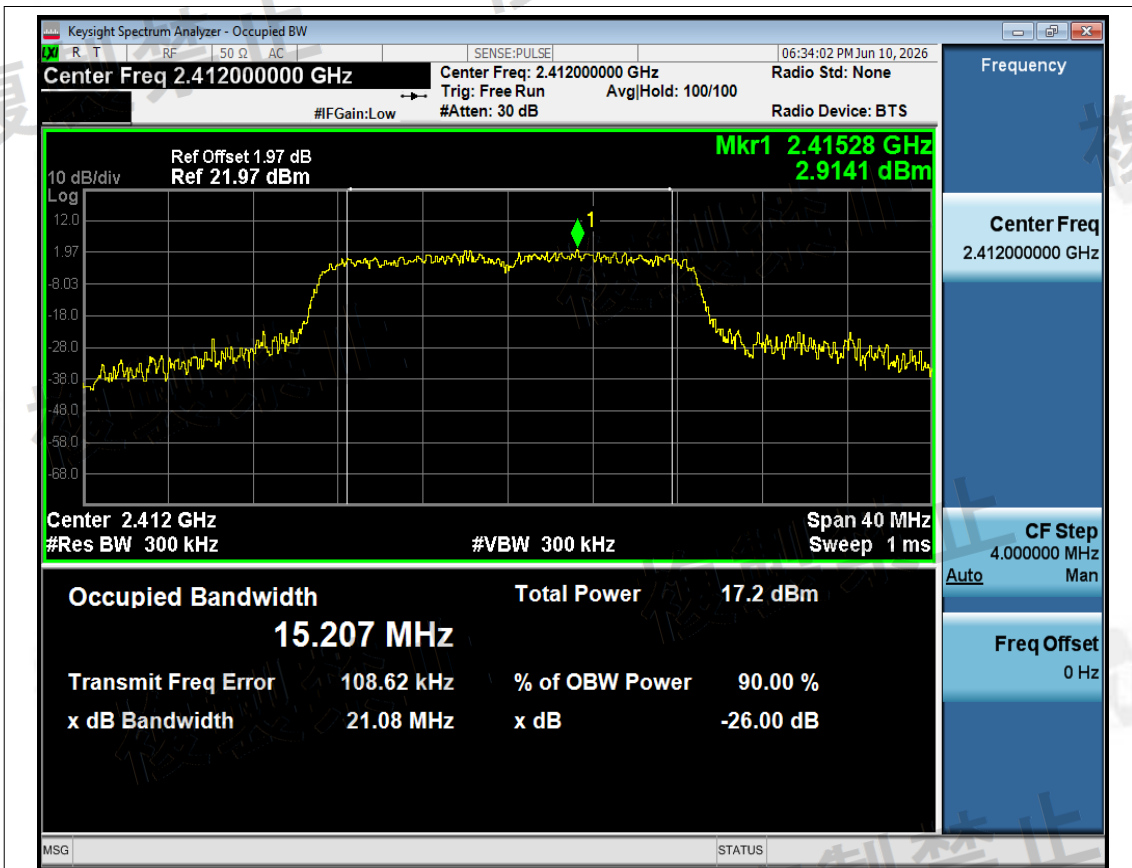

Spreading Bandwidth NVNT n20 2412MHz Ant1

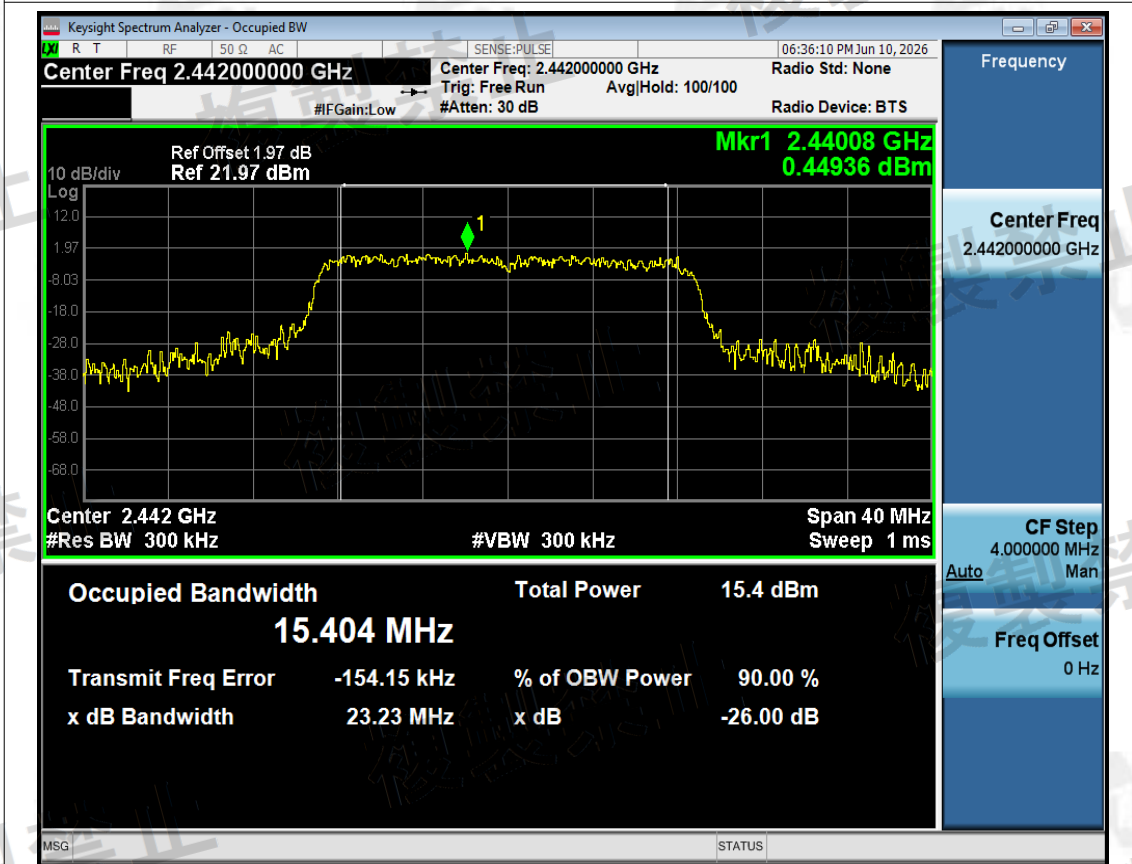

Spreading Bandwidth NVNT n20 2442MHz Ant1




Spreading Bandwidth NVNT n20 2472MHz Ant1



Spreading Bandwidth NVNT n40 2422MHz Ant1



Spreading Bandwidth NVNT n40 2442MHz Ant1

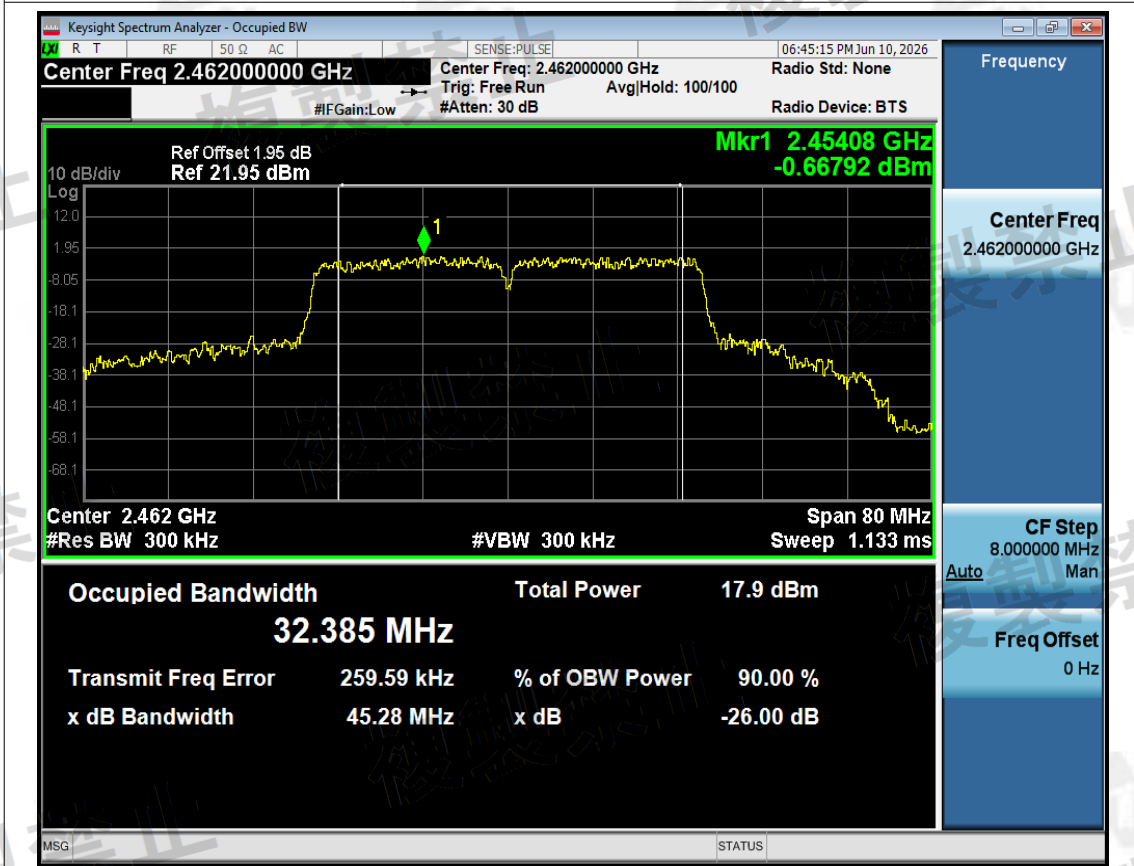

Spreading Bandwidth NVNT n40 2462MHz Ant1

Tx Spurious Emission


Condit ion	Mo de	Freque ncy (MHz)	Ante nna	Range (MHz)	Emissi on Freque ncy (MHz)	Max Pea k Val ue (dB m)	Max RM S Val ue (dB m)	Max Peak Valu e (uW)	Max RM S Valu e (uW)	Limit Start(uW)	Li mit Sto p (u W)	Verd ict
NVNT	b	2412	Ant1	30-1000	441.57	-67.40	NA	0.0002	NA	0.25	0.25	Pass
NVNT	b	2412	Ant1	1000-2387	2387.00	-53.78	NA	0.0042	NA	2.5	2.5	Pass
NVNT	b	2412	Ant1	2387-2400	2399.74	-40.54	NA	0.0883	NA	25	25	Pass
NVNT	b	2412	Ant1	2483.5-2496.5	2485.41	-55.07	NA	0.0031	NA	25	25	Pass
NVNT	b	2412	Ant1	2496.5-13000	7236.73	-51.93	NA	0.0064	NA	2.5	2.5	Pass
NVNT	b	2442	Ant1	30-1000	829.09	-54.46	NA	0.0036	NA	0.25	0.25	Pass
NVNT	b	2442	Ant1	1000-2387	2241.64	-57.09	NA	0.002	NA	2.5	2.5	Pass
NVNT	b	2442	Ant1	2387-2400	2399.34	-53.04	NA	0.005	NA	25	25	Pass
NVNT	b	2442	Ant1	2483.5-2496.5	2483.89	-49.68	NA	0.0108	NA	25	25	Pass
NVNT	b	2442	Ant1	2496.5-13000	7326.01	-54.31	NA	0.0037	NA	2.5	2.5	Pass
NVNT	b	2472	Ant1	30-1000	796.59	-67.57	NA	0.0002	NA	0.25	0.25	Pass
NVNT	b	2472	Ant1	1000-2387	2198.37	-56.12	NA	0.0024	NA	2.5	2.5	Pass
NVNT	b	2472	Ant1	2387-2400	2399.57	-55.37	NA	0.0029	NA	25	25	Pass
NVNT	b	2472	Ant1	2483.5-2496.5	2483.59	-40.09	NA	0.0979	NA	25	25	Pass
NVNT	b	2472	Ant1	2496.5-13000	7415.29	-49.69	NA	0.0107	NA	2.5	2.5	Pass
NVNT	g	2412	Ant1	30-1000	830.44	-63.03	NA	0.0005	NA	0.25	0.25	Pass
NVNT	g	2412	Ant1	1000-2387	2387.00	-43.13	NA	0.0486	NA	2.5	2.5	Pass
NVNT	g	2412	Ant1	2387-2400	2399.3	-15.	-39.	29.17	0.11	25	25	Pass




				0	1	35	36	43	59			
NVNT	g	2412	Ant1	2483.5-24 96.5	2483.6 8	-53. 97	NA	0.004	NA	25	25	Pass
NVNT	g	2412	Ant1	2496.5-13 000	7243.0 3	-52. 79	NA	0.005 3	NA	2.5	2.5	Pass
NVNT	g	2442	Ant1	30-1000	910.47	-57. 06	NA	0.002	NA	0.25	0.2 5	Pass
NVNT	g	2442	Ant1	1000-238 7	2376.4 6	-57. 07	NA	0.002	NA	2.5	2.5	Pass
NVNT	g	2442	Ant1	2387-240 0	2399.8 5	-48. 92	NA	0.012 8	NA	25	25	Pass
NVNT	g	2442	Ant1	2483.5-24 96.5	2483.5 8	-44. 89	NA	0.032 4	NA	25	25	Pass
NVNT	g	2442	Ant1	2496.5-13 000	7330.2 1	-54. 60	NA	0.003 5	NA	2.5	2.5	Pass
NVNT	g	2472	Ant1	30-1000	911.25	-58. 19	NA	0.001 5	NA	0.25	0.2 5	Pass
NVNT	g	2472	Ant1	1000-238 7	1519.0 2	-57. 40	NA	0.001 8	NA	2.5	2.5	Pass
NVNT	g	2472	Ant1	2387-240 0	2397.5 9	-54. 76	NA	0.003 3	NA	25	25	Pass
NVNT	g	2472	Ant1	2483.5-24 96.5	2483.7 2	-16. 18	-38. 25	24.09 91	0.14 96	25	25	Pass
NVNT	g	2472	Ant1	2496.5-13 000	7414.2 4	-47. 26	NA	0.018 8	NA	2.5	2.5	Pass
NVNT	n20	2412	Ant1	30-1000	793.20	-65. 93	NA	0.000 3	NA	0.25	0.2 5	Pass
NVNT	n20	2412	Ant1	1000-238 7	2386.1 7	-45. 09	NA	0.031	NA	2.5	2.5	Pass
NVNT	n20	2412	Ant1	2387-240 0	2399.7 4	-15. 27	-36. 96	29.71 67	0.20 14	25	25	Pass
NVNT	n20	2412	Ant1	2483.5-24 96.5	2484.0 0	-54. 53	NA	0.003 5	NA	25	25	Pass
NVNT	n20	2412	Ant1	2496.5-13 000	7233.5 8	-51. 17	NA	0.007 6	NA	2.5	2.5	Pass
NVNT	n20	2442	Ant1	30-1000	905.23	-66. 92	NA	0.000 2	NA	0.25	0.2 5	Pass
NVNT	n20	2442	Ant1	1000-238 7	2013.6 2	-56. 73	NA	0.002 1	NA	2.5	2.5	Pass
NVNT	n20	2442	Ant1	2387-240 0	2396.7 9	-48. 08	NA	0.015 6	NA	25	25	Pass
NVNT	n20	2442	Ant1	2483.5-24 96.5	2483.7 1	-44. 03	NA	0.039 5	NA	25	25	Pass
NVNT	n20	2442	Ant1	2496.5-13	7321.8	-53.	NA	0.004	NA	2.5	2.5	Pass



				000	1	66		3				
NVNT	n20	2472	Ant1	30-1000	787.76	-67.16	NA	0.0002	NA	0.25	0.25	Pass
NVNT	n20	2472	Ant1	1000-2387	1772.14	-56.98	NA	0.002	NA	2.5	2.5	Pass
NVNT	n20	2472	Ant1	2387-2400	2399.28	-54.88	NA	0.0033	NA	25	25	Pass
NVNT	n20	2472	Ant1	2483.5-2496.5	2484.37	-15.52	-38.52	28.0543	0.1406	25	25	Pass
NVNT	n20	2472	Ant1	2496.5-13000	2496.50	-48.09	NA	0.0155	NA	2.5	2.5	Pass
NVNT	n40	2422	Ant1	30-1000	953.73	-67.18	NA	0.0002	NA	0.25	0.25	Pass
NVNT	n40	2422	Ant1	1000-2387	2385.20	-38.72	NA	0.1343	NA	2.5	2.5	Pass
NVNT	n40	2422	Ant1	2387-2400	2399.95	-23.62	NA	4.3451	NA	25	25	Pass
NVNT	n40	2422	Ant1	2483.5-2496.5	2484.52	-50.91	NA	0.0081	NA	25	25	Pass
NVNT	n40	2422	Ant1	2496.5-13000	5760.99	-54.20	NA	0.0038	NA	2.5	2.5	Pass
NVNT	n40	2442	Ant1	30-1000	910.47	-67.34	NA	0.0002	NA	0.25	0.25	Pass
NVNT	n40	2442	Ant1	1000-2387	2294.07	-56.38	NA	0.0023	NA	2.5	2.5	Pass
NVNT	n40	2442	Ant1	2387-2400	2399.30	-35.54	NA	0.2793	NA	25	25	Pass
NVNT	n40	2442	Ant1	2483.5-2496.5	2483.93	-36.72	NA	0.2128	NA	25	25	Pass
NVNT	n40	2442	Ant1	2496.5-13000	5852.37	-54.30	NA	0.0037	NA	2.5	2.5	Pass
NVNT	n40	2462	Ant1	30-1000	830.25	-49.08	NA	0.0124	NA	0.25	0.25	Pass
NVNT	n40	2462	Ant1	1000-2387	2387.07	-53.65	NA	0.0043	NA	2.5	2.5	Pass
NVNT	n40	2462	Ant1	2387-2400	2397.90	-40.11	NA	0.0975	NA	25	25	Pass
NVNT	n40	2462	Ant1	2483.5-2496.5	2484.68	-16.83	-35.87	20.7491	0.2588	25	25	Pass
NVNT	n40	2462	Ant1	2496.5-13000	2496.50	-33.31	NA	0.4667	NA	2.5	2.5	Pass

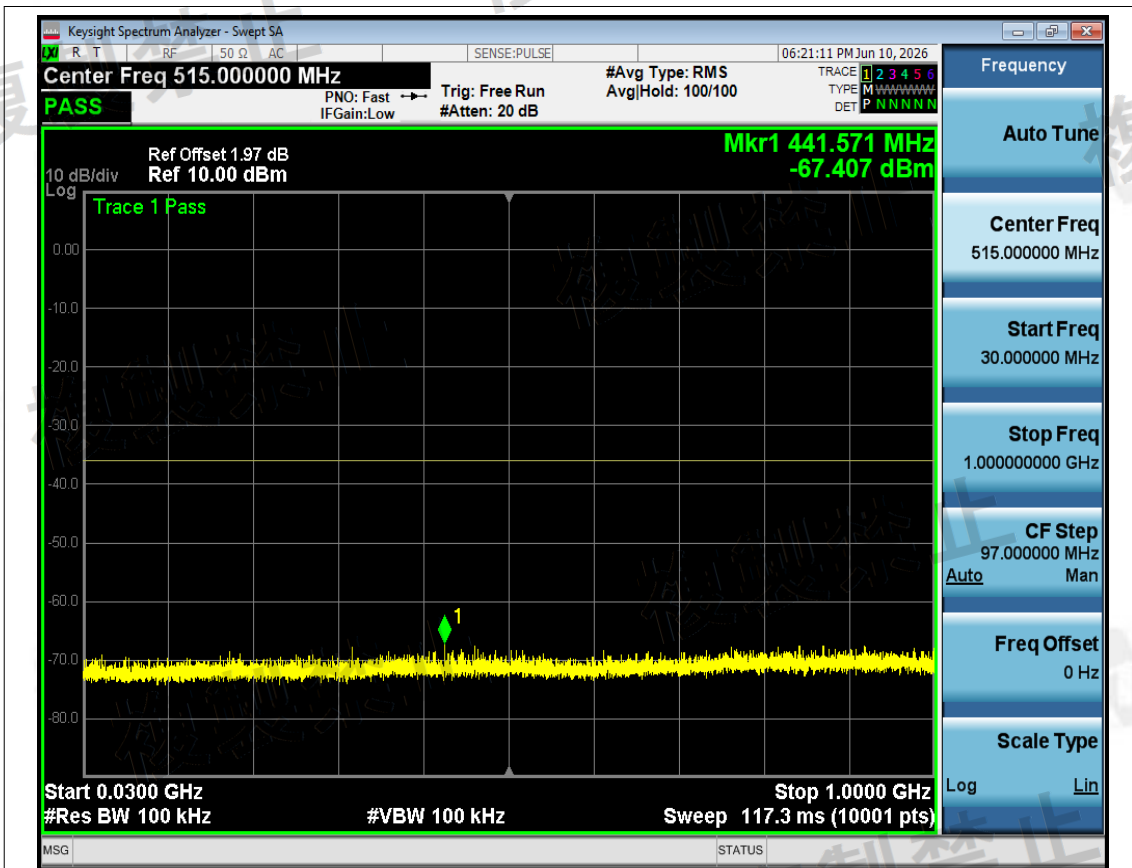


Tx. Spurious NVNT b 2412MHz Ant1 @ 30MHz-1000MHz

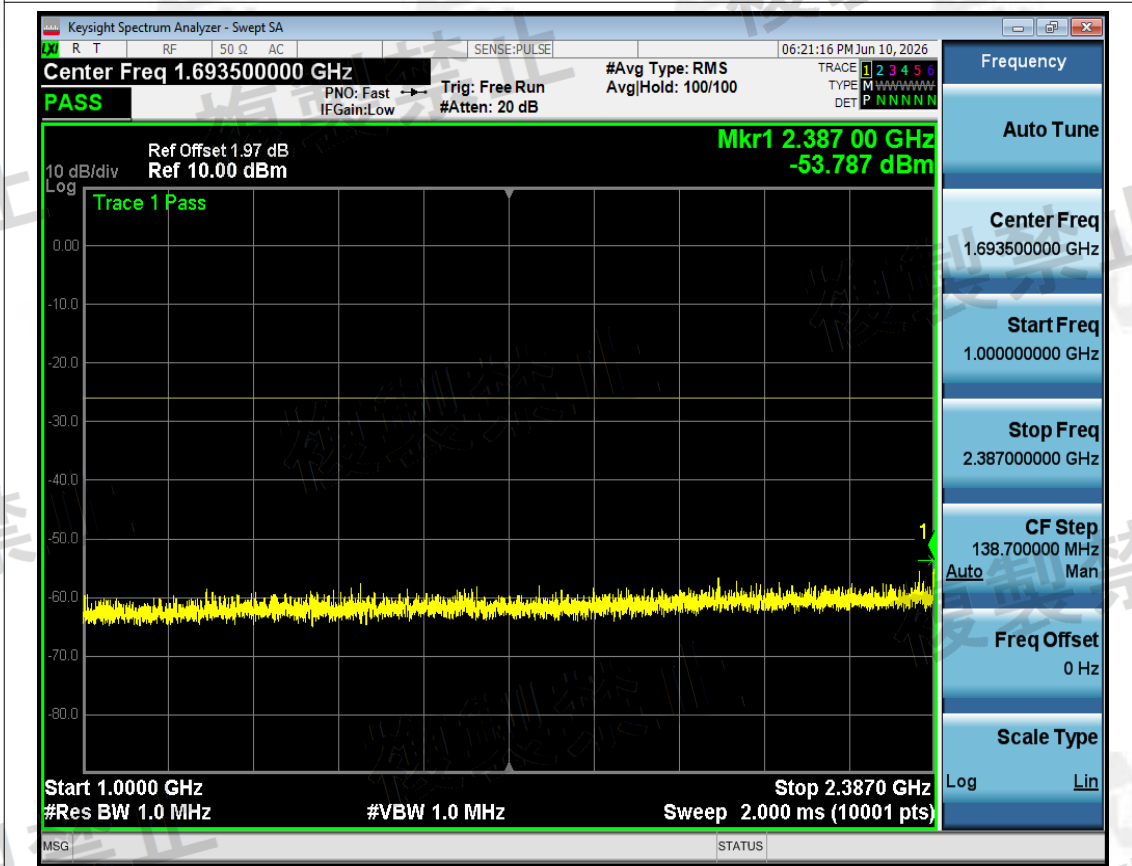


Tx. Spurious NVNT b 2412MHz Ant1 @ 1000MHz-2387MHz




Tx. Spurious NVNT b 2412MHz Ant1 @ 2387MHz-2400MHz

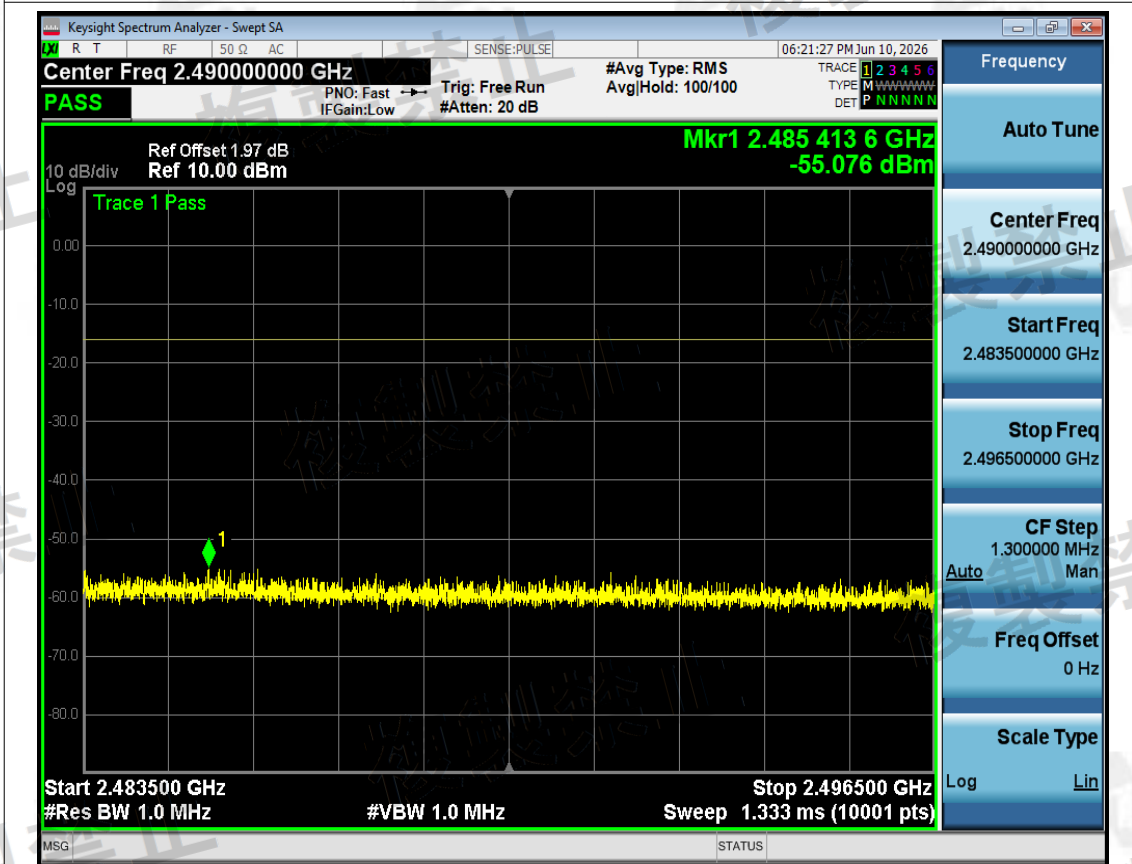


Tx. Spurious NVNT b 2412MHz Ant1 @ 2483.5MHz-2496.5MHz

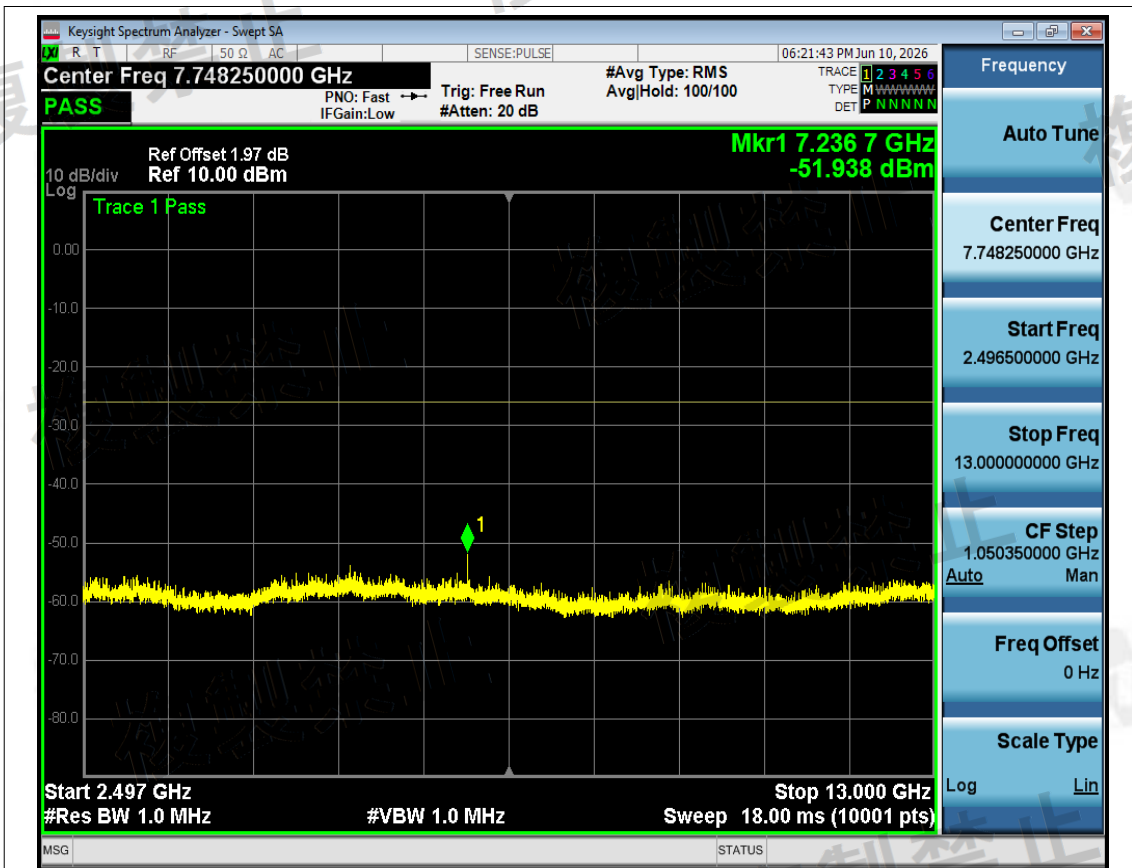


Tx. Spurious NVNT b 2412MHz Ant1 @ 2496.5MHz-13000MHz

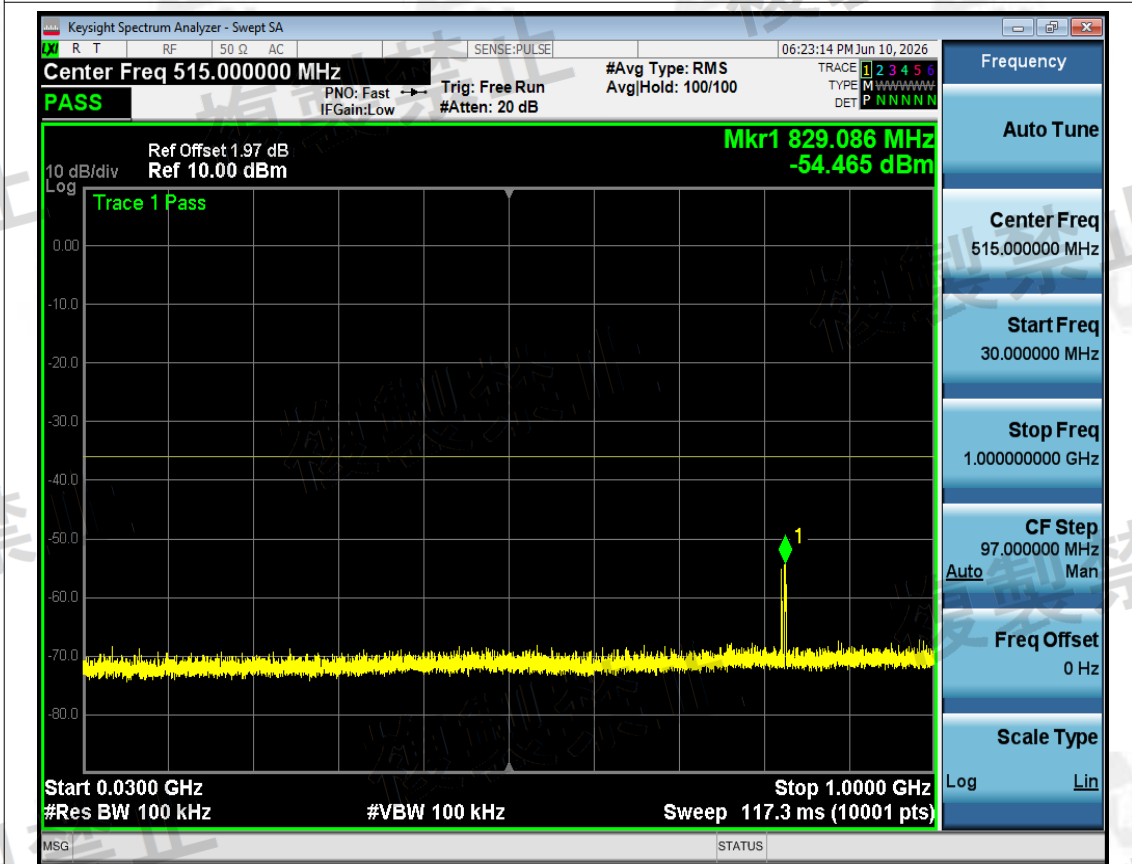


Tx. Spurious NVNT b 2442MHz Ant1 @ 30MHz-1000MHz

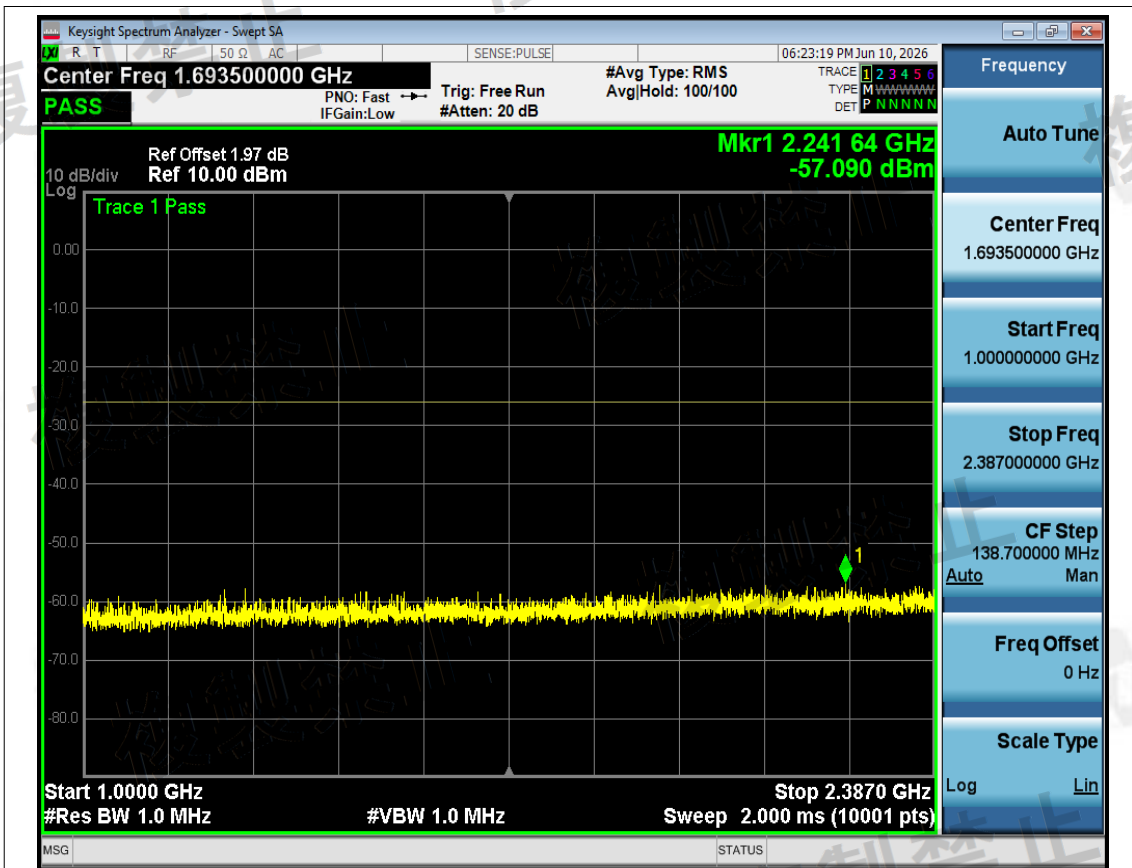


Tx. Spurious NVNT b 2442MHz Ant1 @ 1000MHz-2387MHz

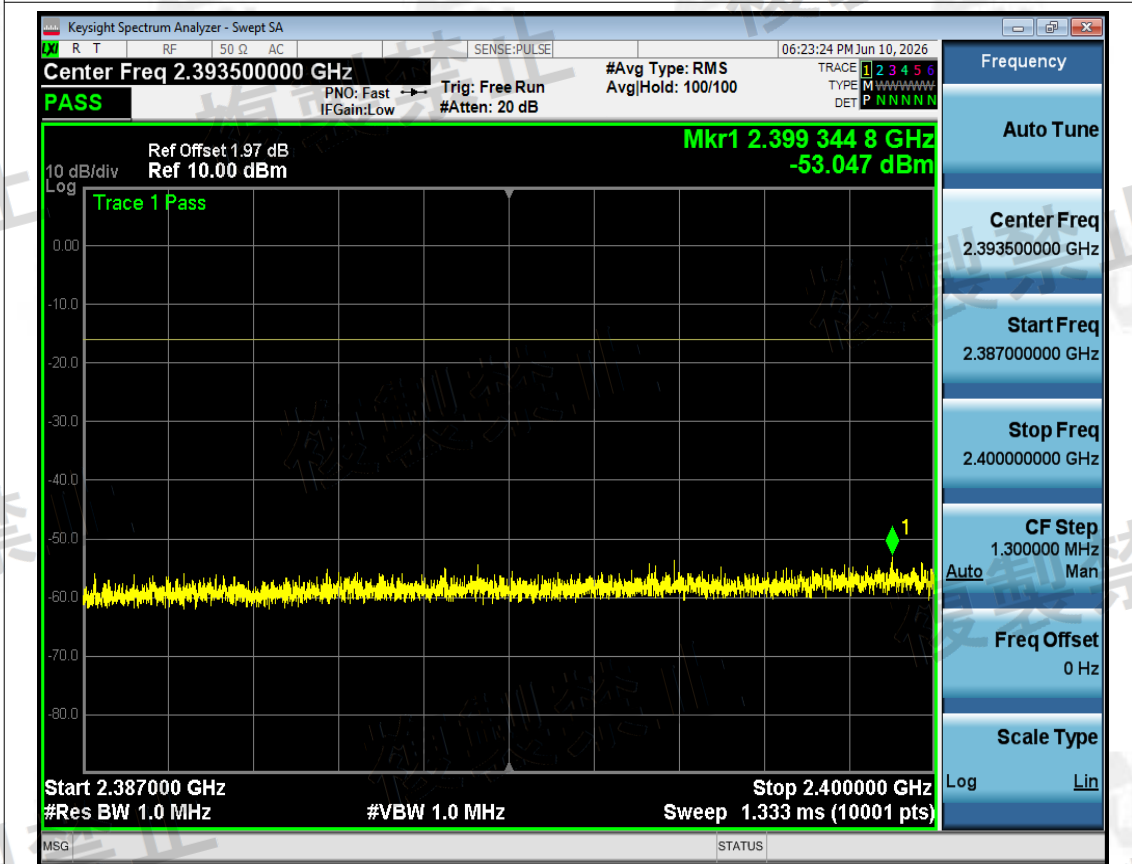


Tx. Spurious NVNT b 2442MHz Ant1 @ 2387MHz-2400MHz

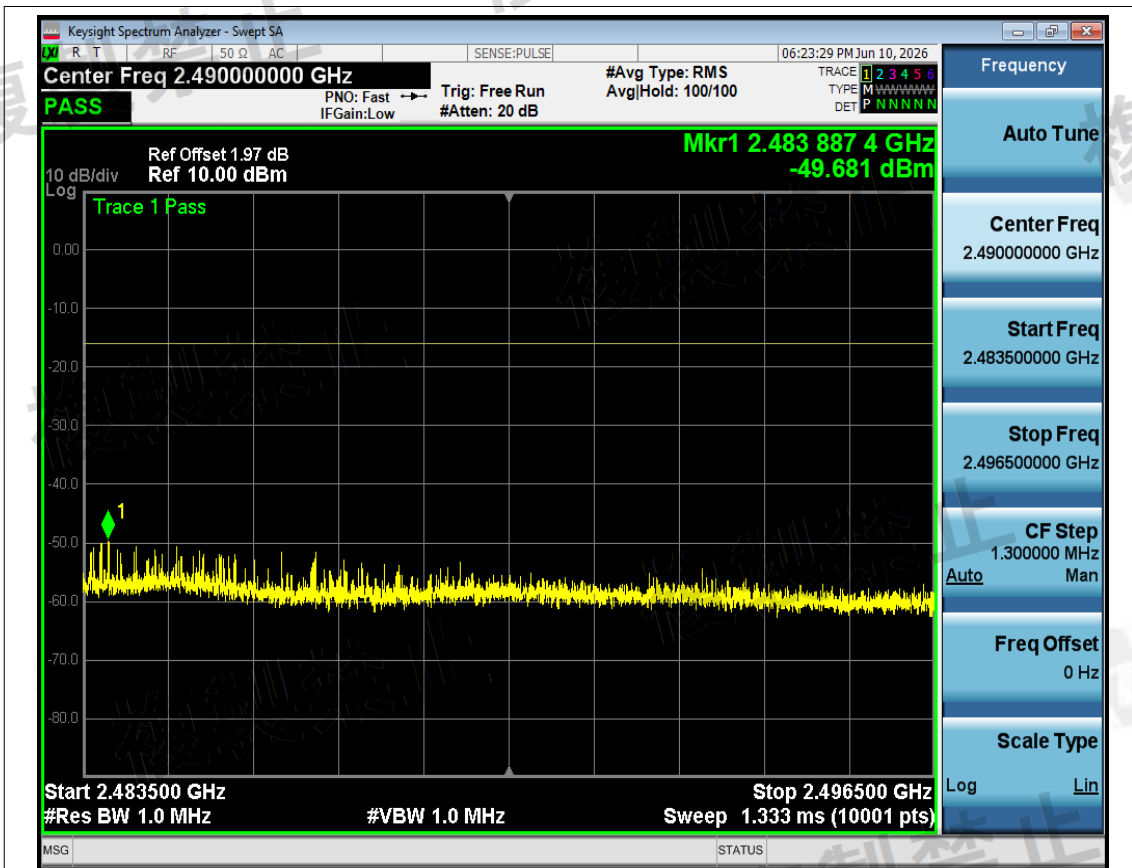


Tx. Spurious NVNT b 2442MHz Ant1 @ 2483.5MHz-2496.5MHz

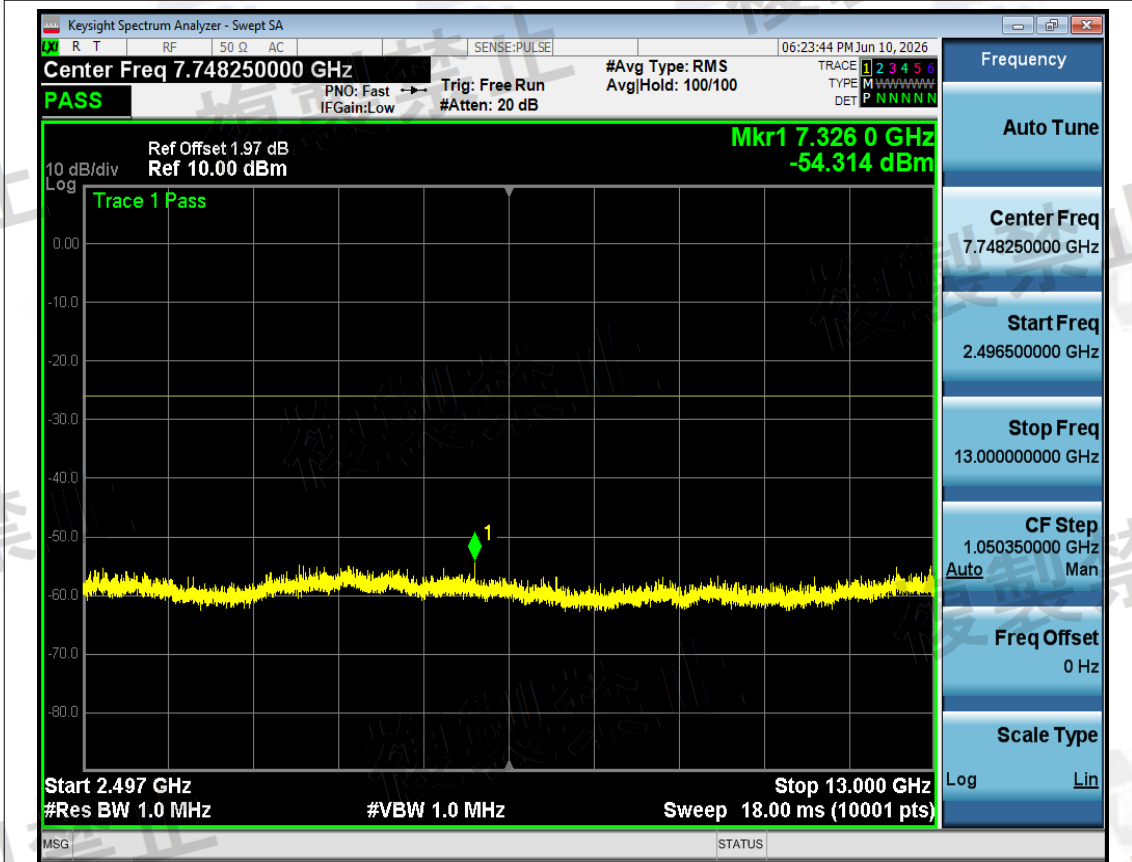


Tx. Spurious NVNT b 2442MHz Ant1 @ 2496.5MHz-13000MHz

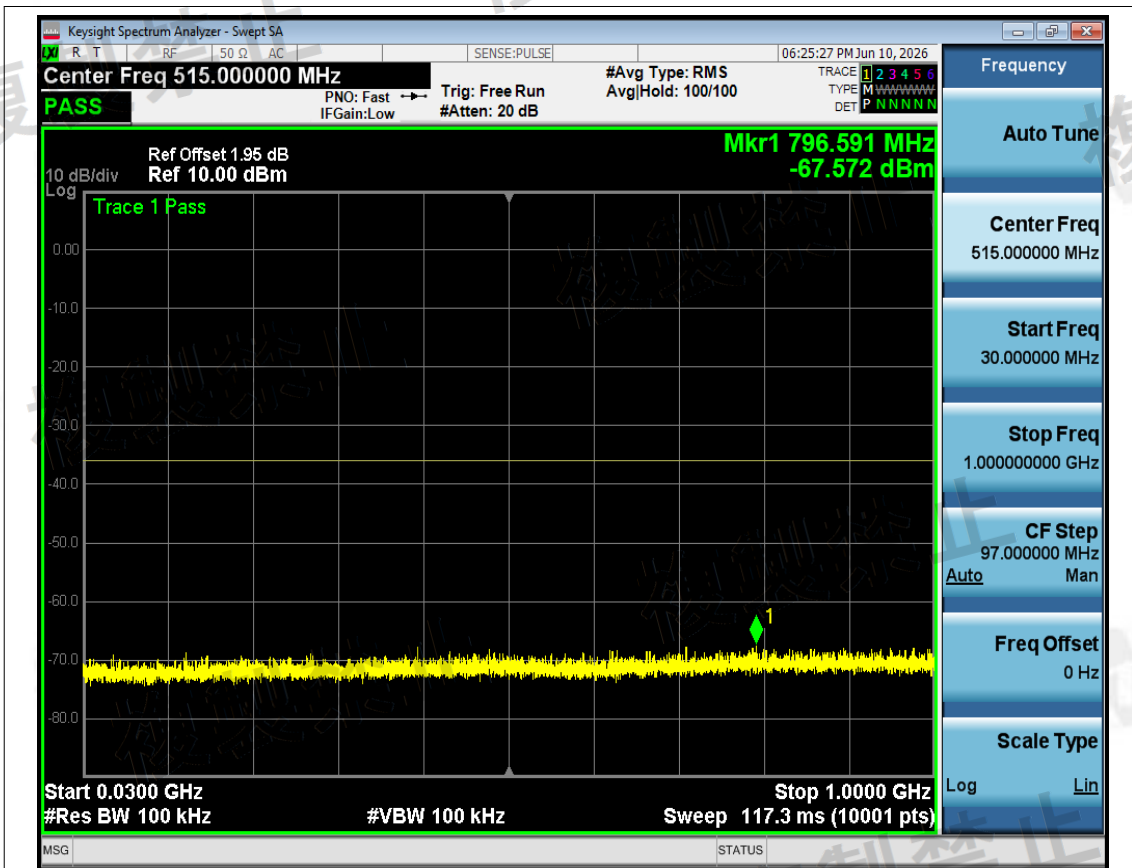


Tx. Spurious NVNT b 2472MHz Ant1 @ 30MHz-1000MHz

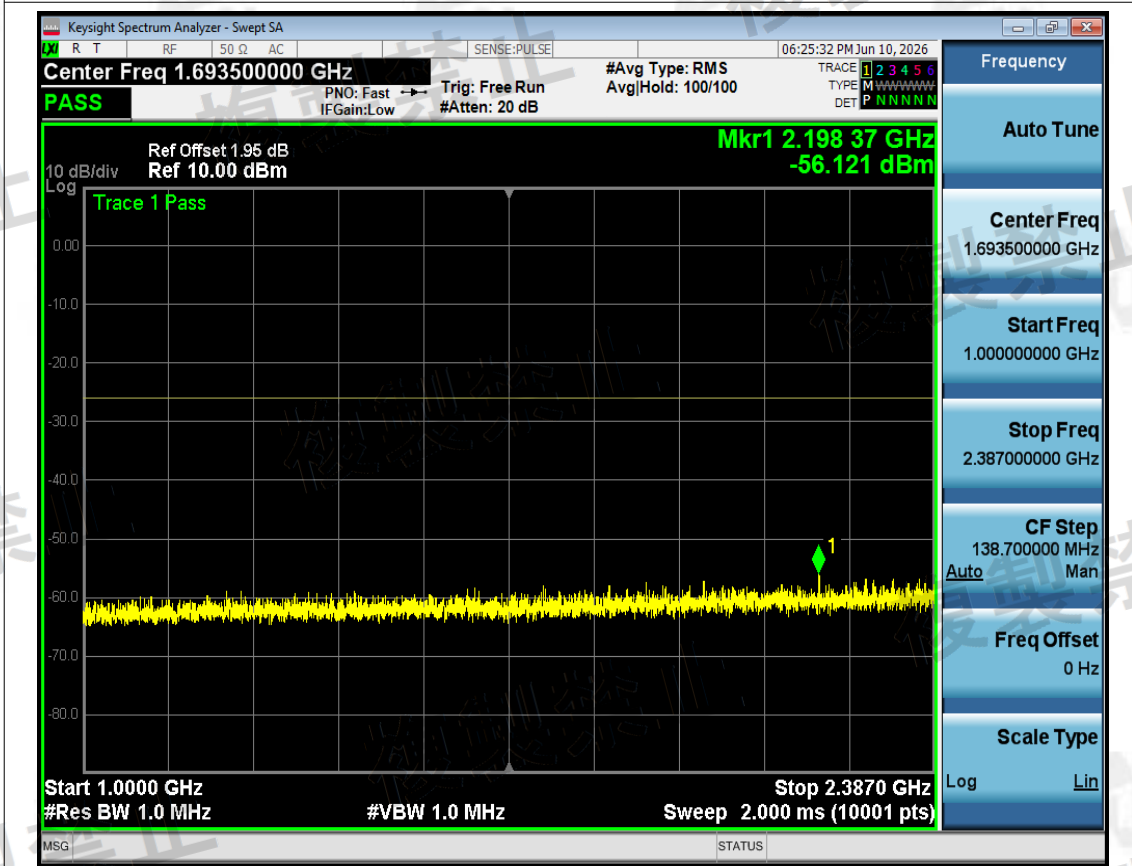


Tx. Spurious NVNT b 2472MHz Ant1 @ 1000MHz-2387MHz

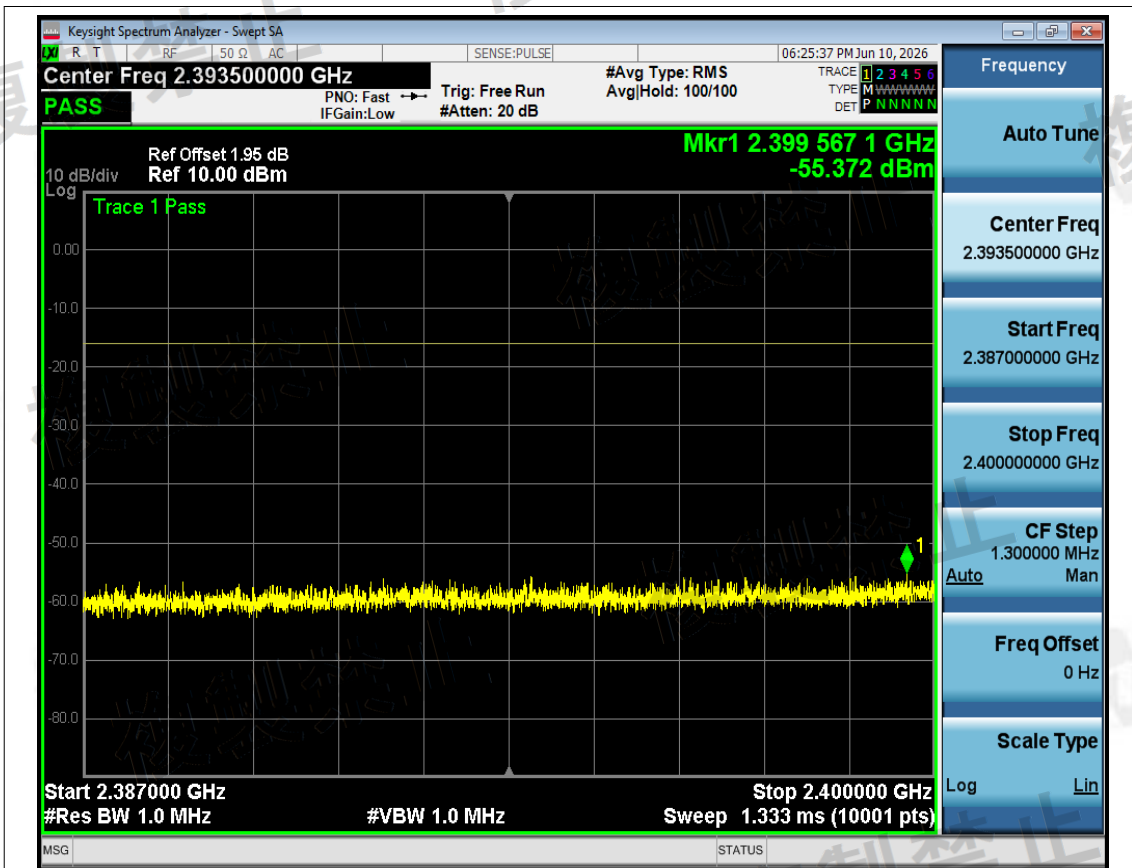


Tx. Spurious NVNT b 2472MHz Ant1 @ 2387MHz-2400MHz

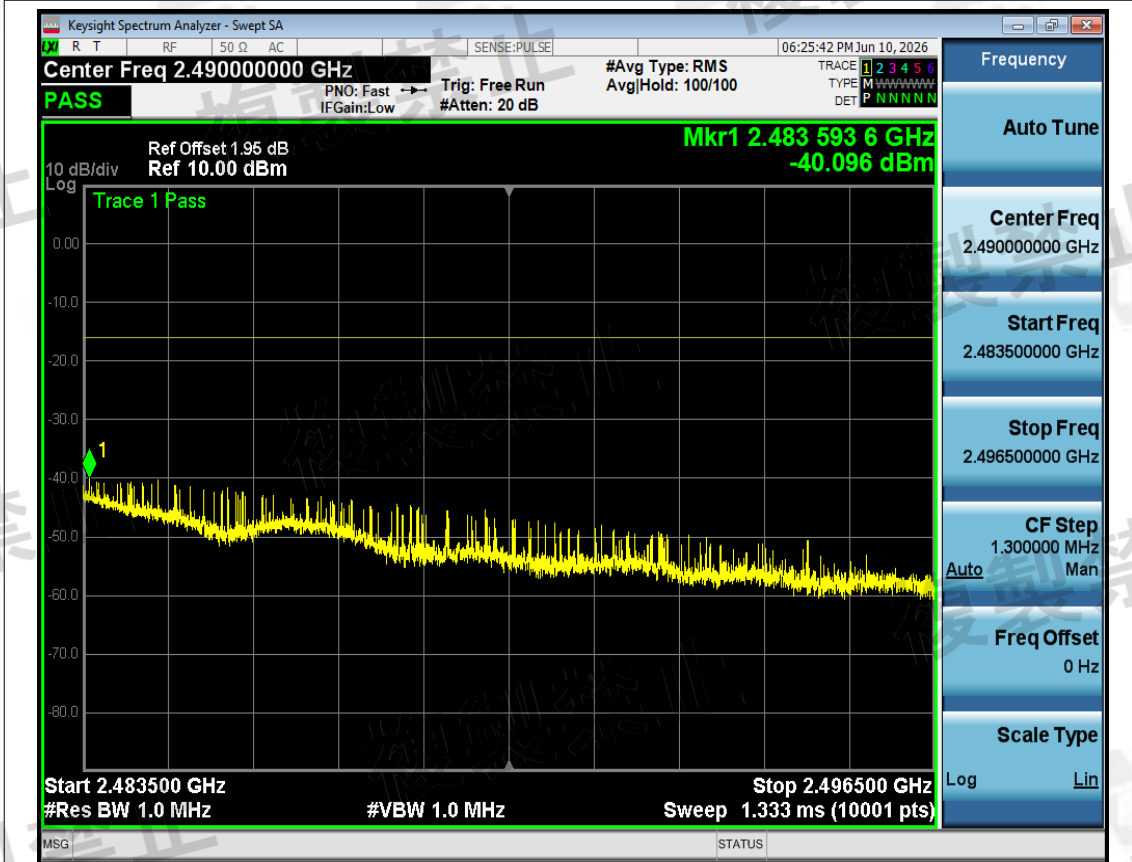


Tx. Spurious NVNT b 2472MHz Ant1 @ 2483.5MHz-2496.5MHz

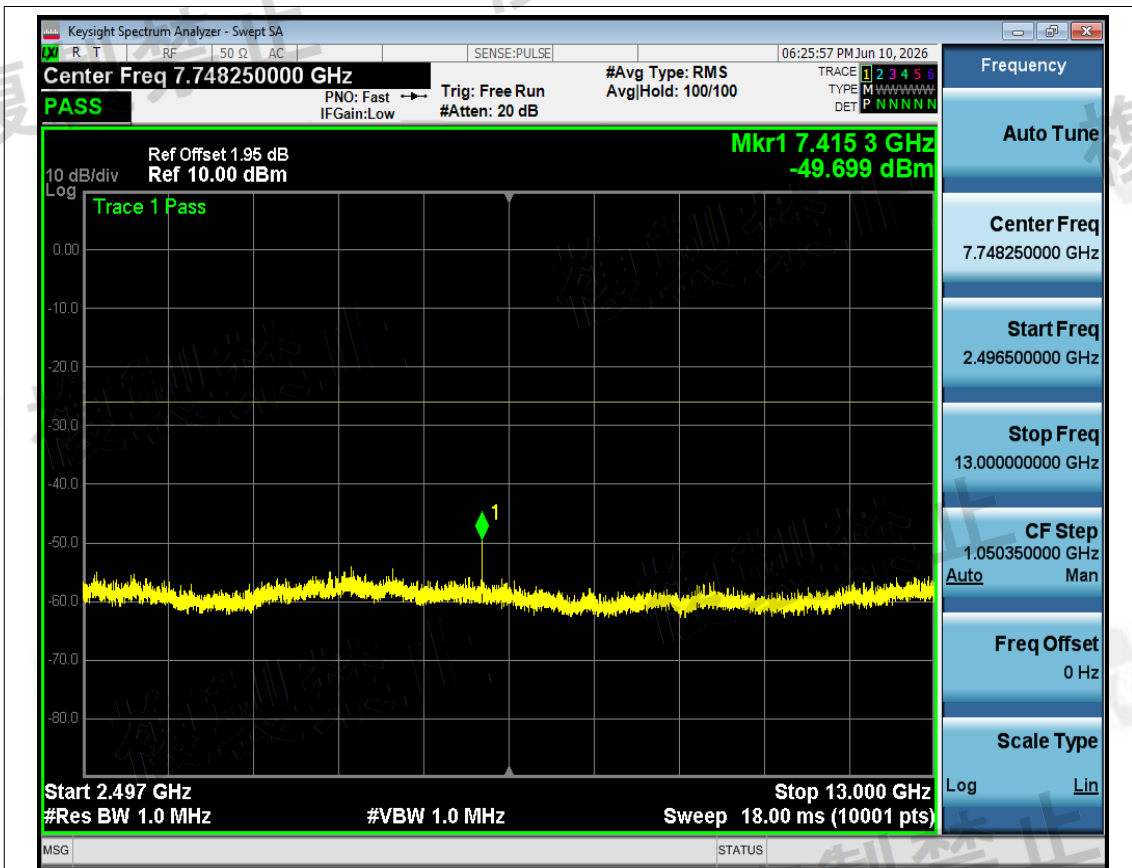


Tx. Spurious NVNT b 2472MHz Ant1 @ 2496.5MHz-13000MHz

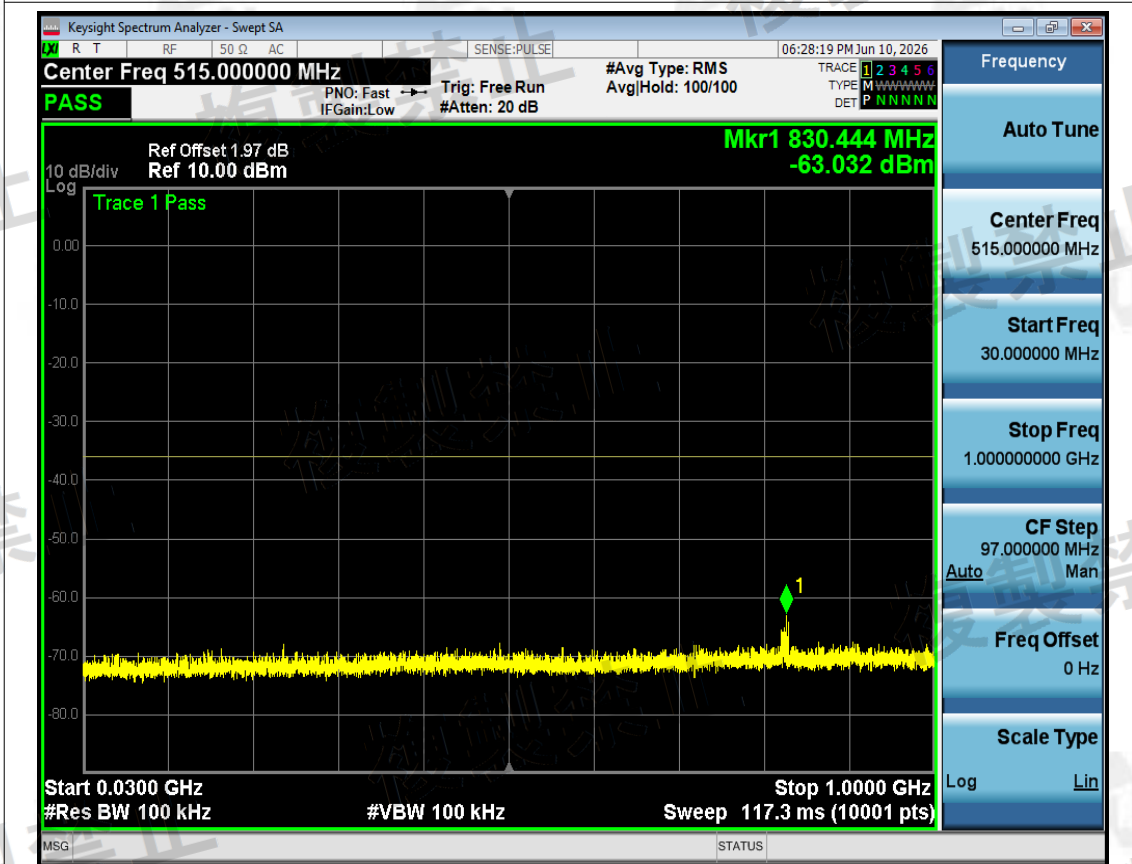


Tx. Spurious NVNT g 2412MHz Ant1 @ 30MHz-1000MHz

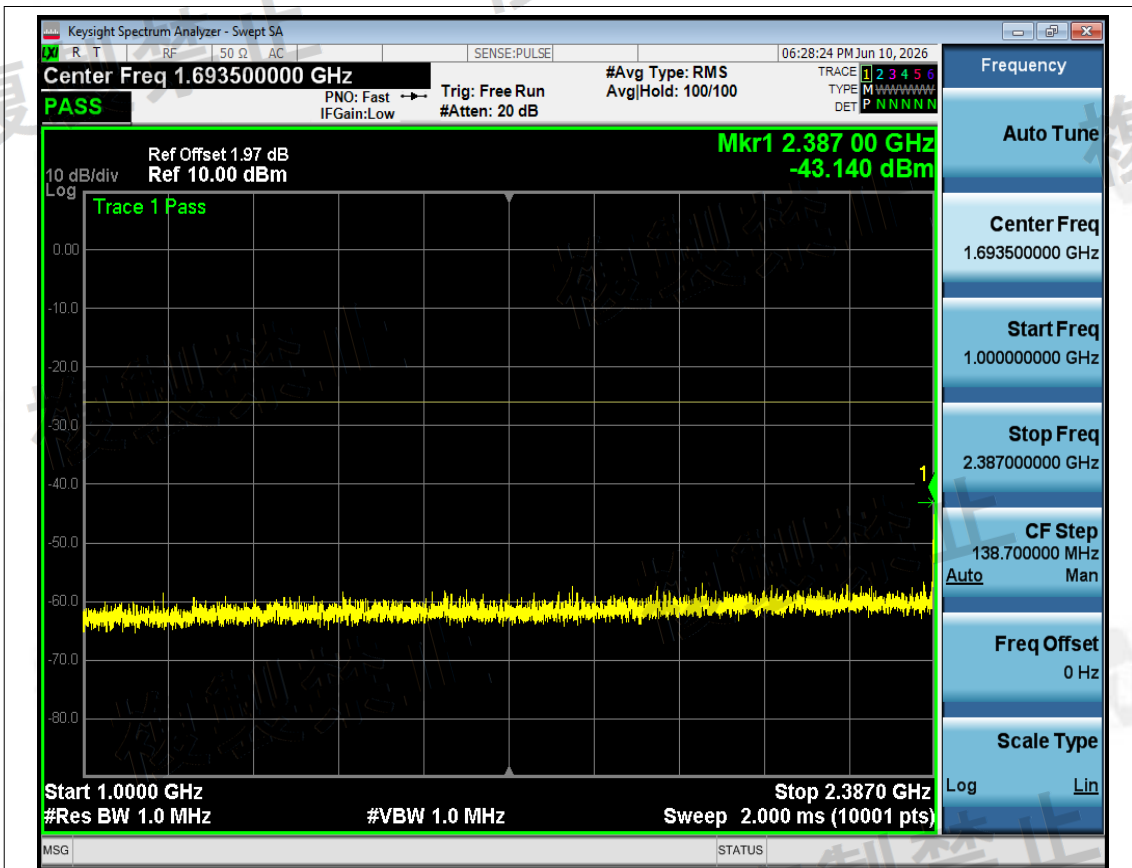


Tx. Spurious NVNT g 2412MHz Ant1 @ 1000MHz-2387MHz

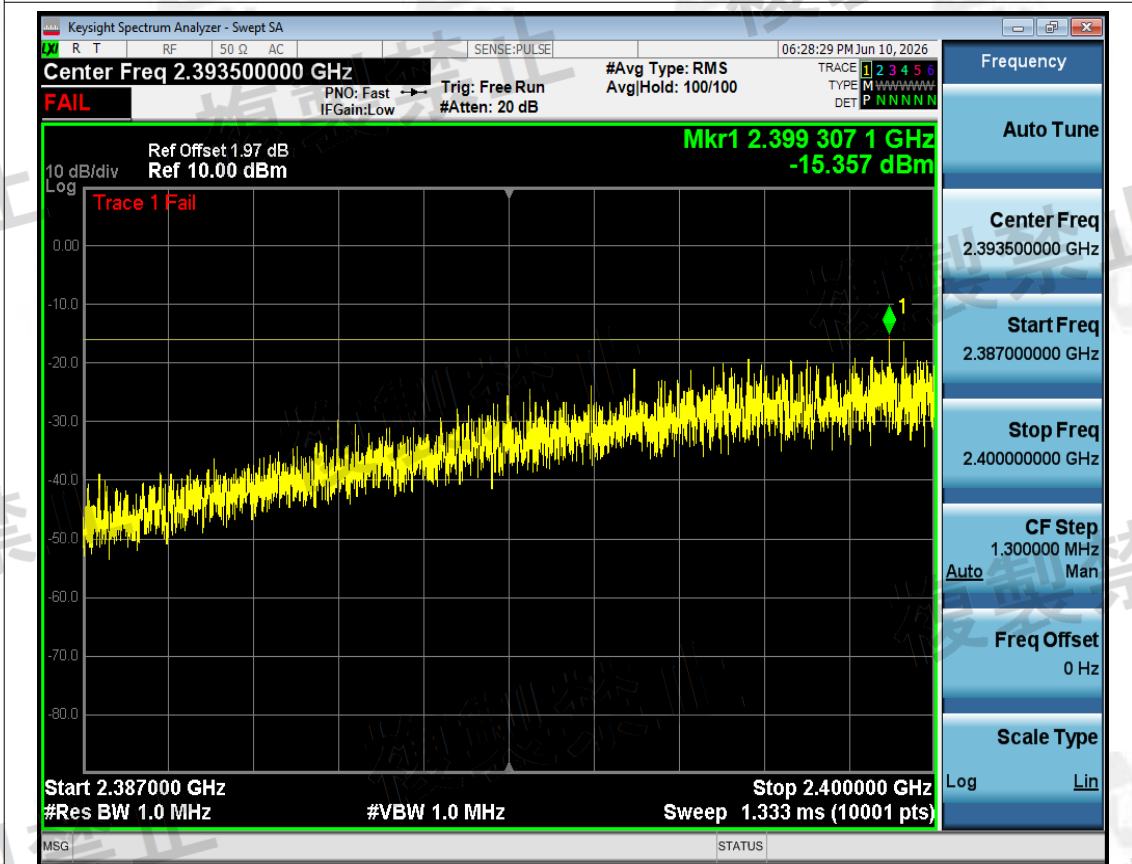

Tx. Spurious NVNT g 2412MHz Ant1 @ 2387MHz-2400MHz

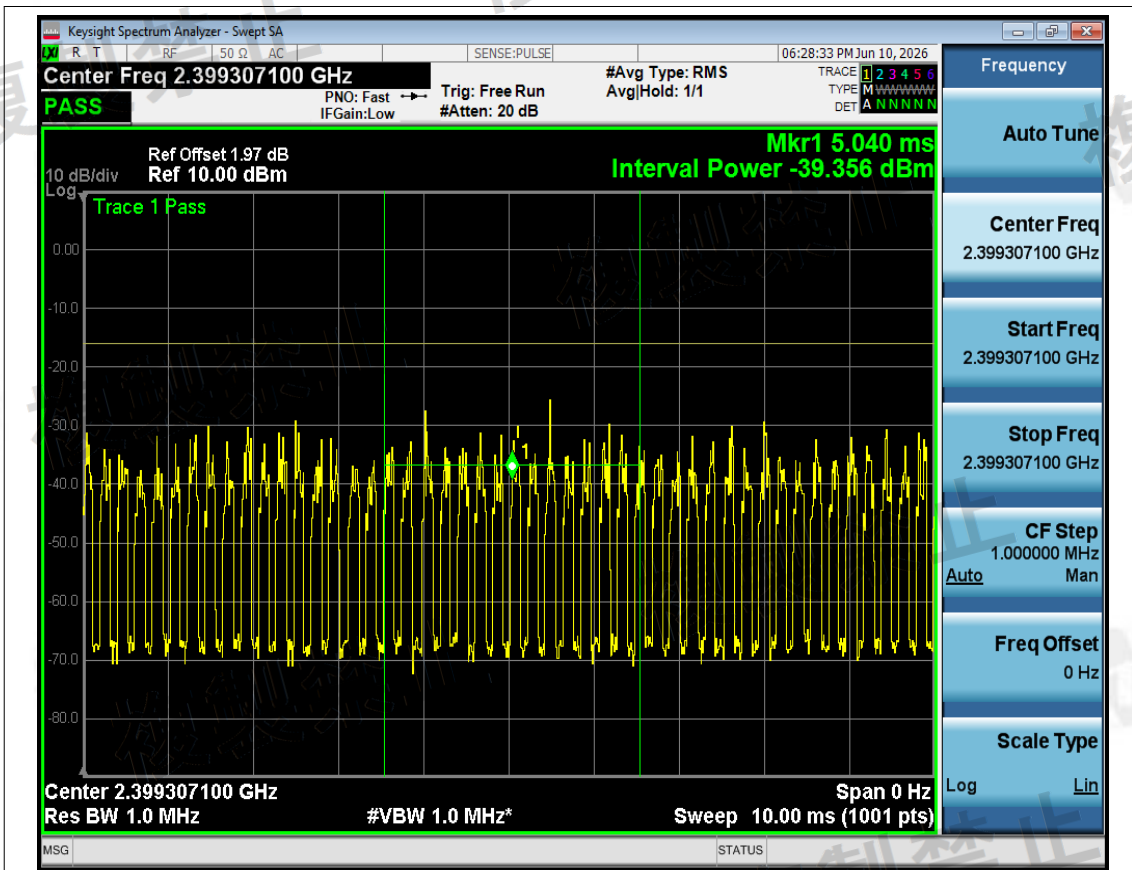


Tx. Spurious NVNT g 2412MHz Ant1 @ 2387MHz-2400MHz Final

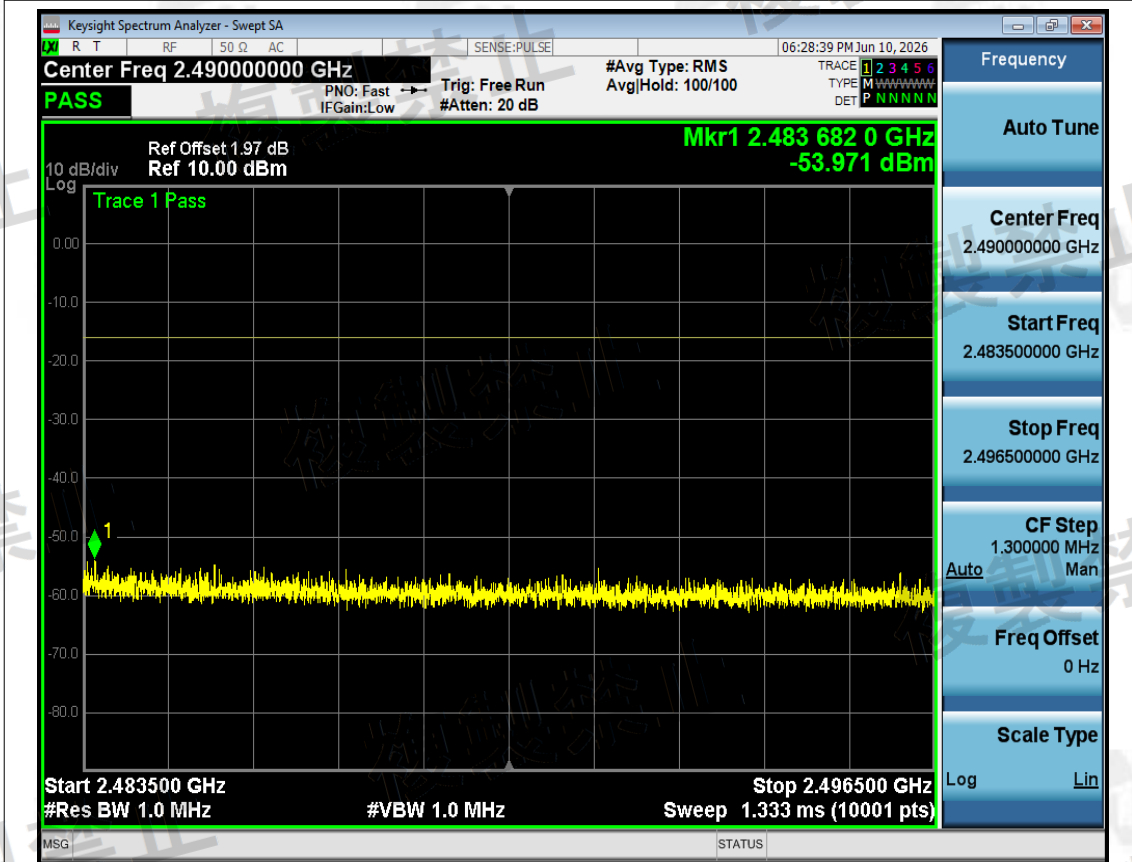


Tx. Spurious NVNT g 2412MHz Ant1 @ 2483.5MHz-2496.5MHz




Tx. Spurious NVNT g 2412MHz Ant1 @ 2496.5MHz-13000MHz

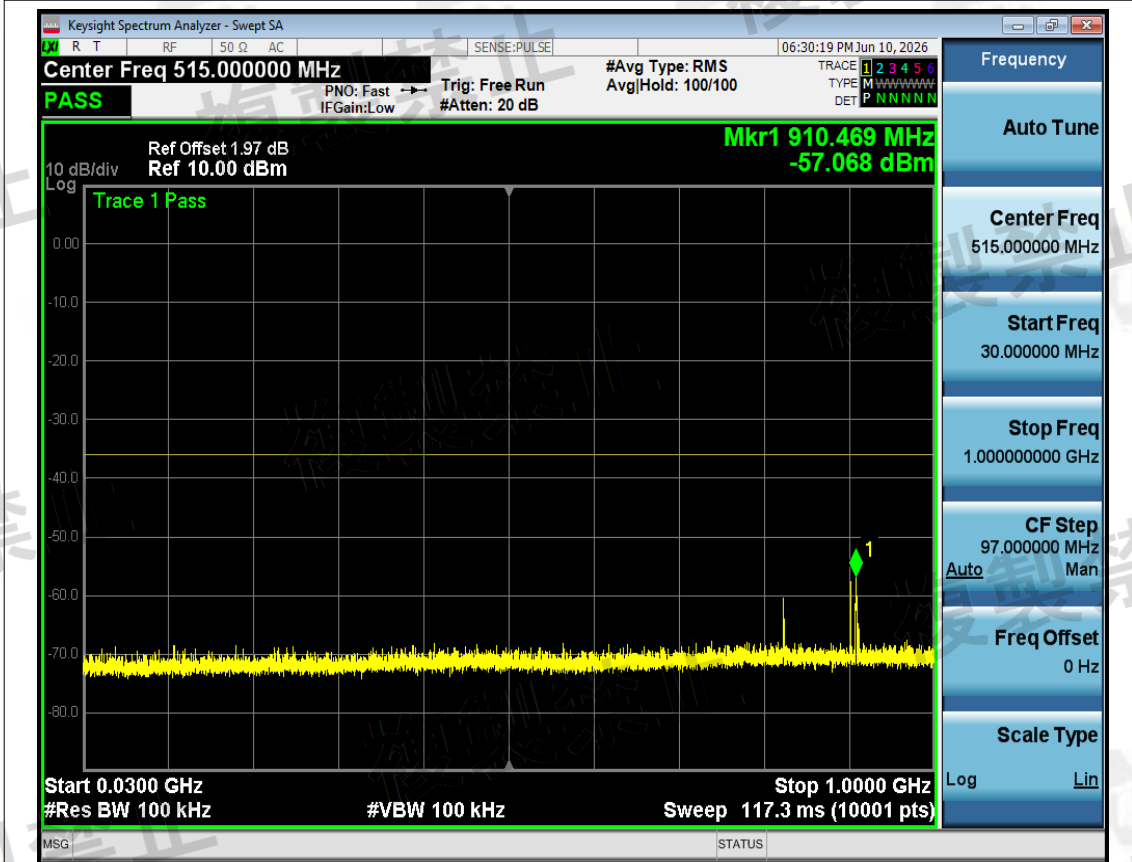


Tx. Spurious NVNT g 2442MHz Ant1 @ 30MHz-1000MHz

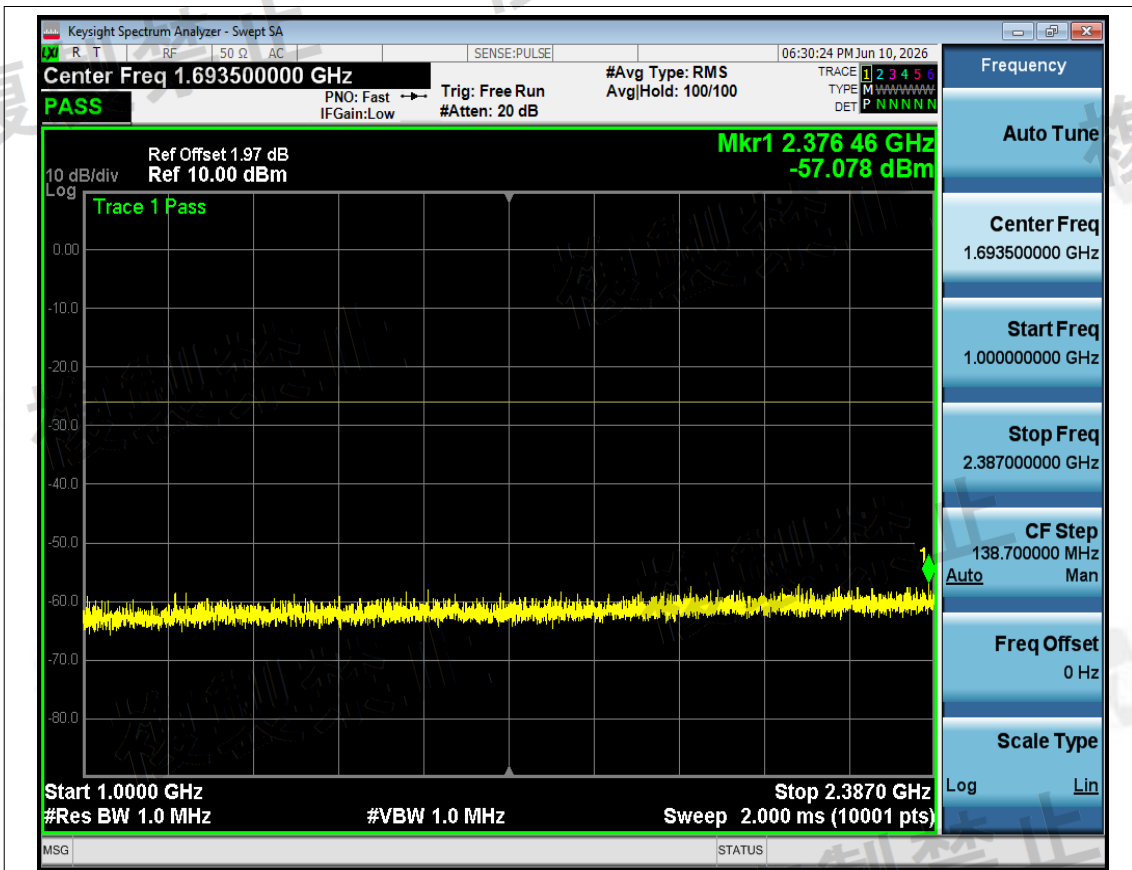


Tx. Spurious NVNT g 2442MHz Ant1 @ 1000MHz-2387MHz

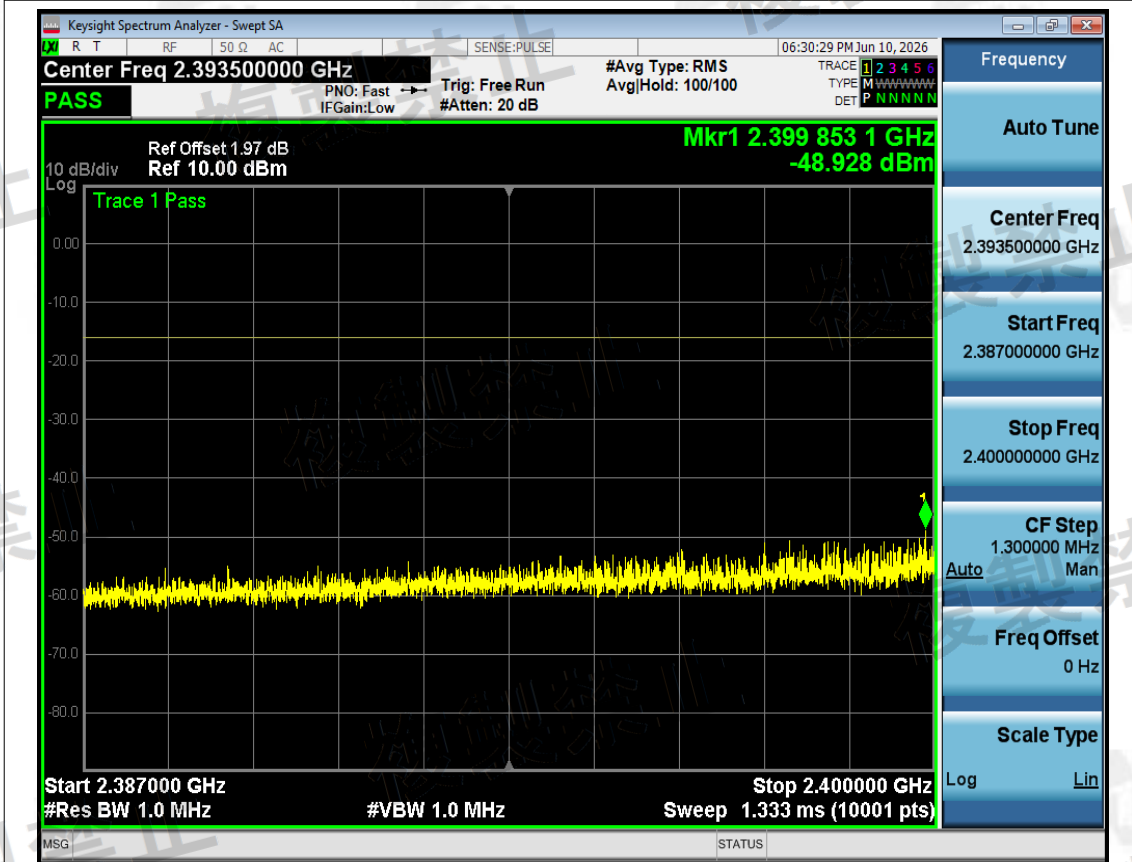


Tx. Spurious NVNT g 2442MHz Ant1 @ 2387MHz-2400MHz

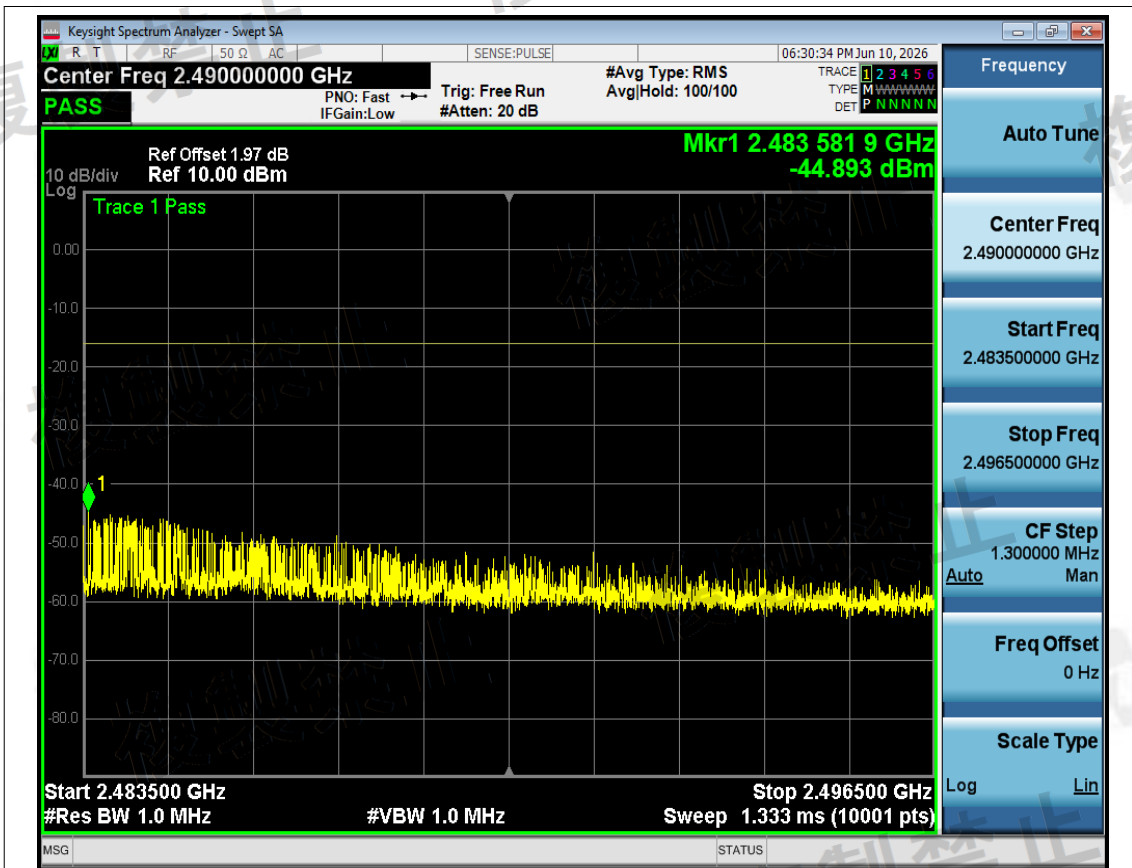


Tx. Spurious NVNT g 2442MHz Ant1 @ 2483.5MHz-2496.5MHz

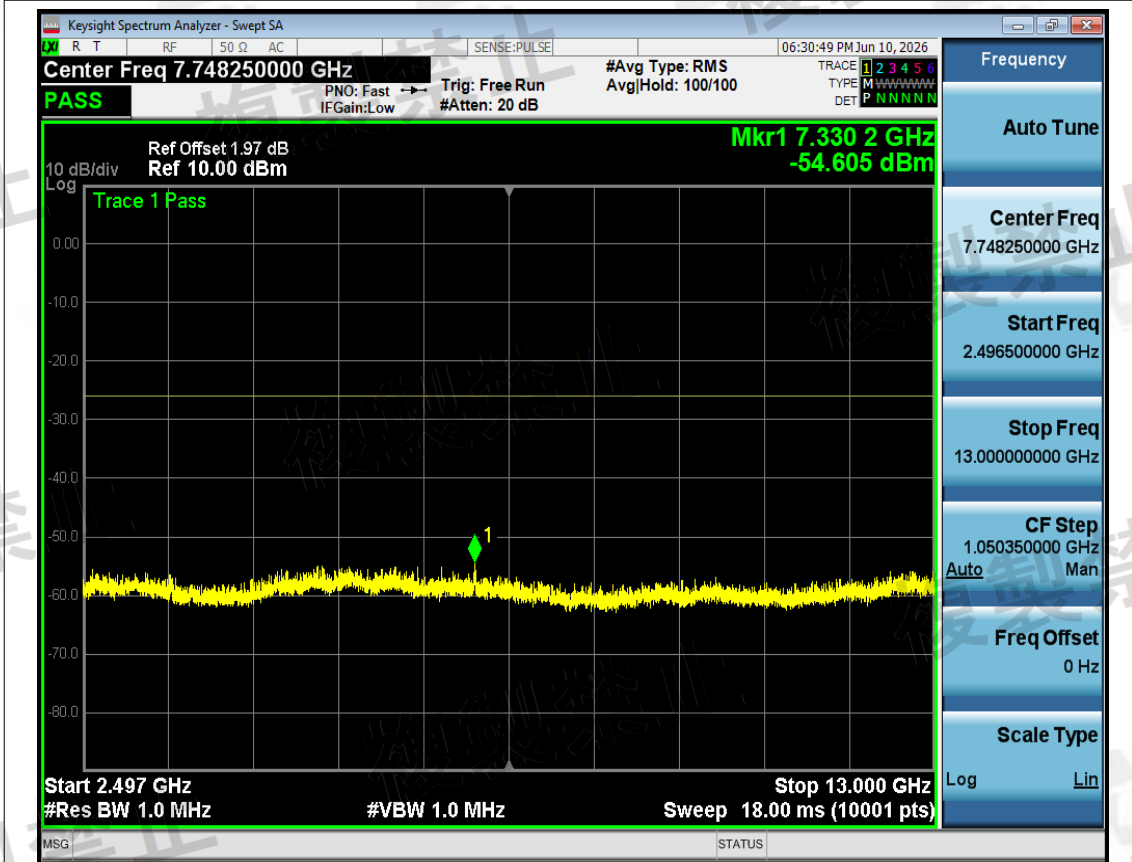


Tx. Spurious NVNT g 2442MHz Ant1 @ 2496.5MHz-13000MHz

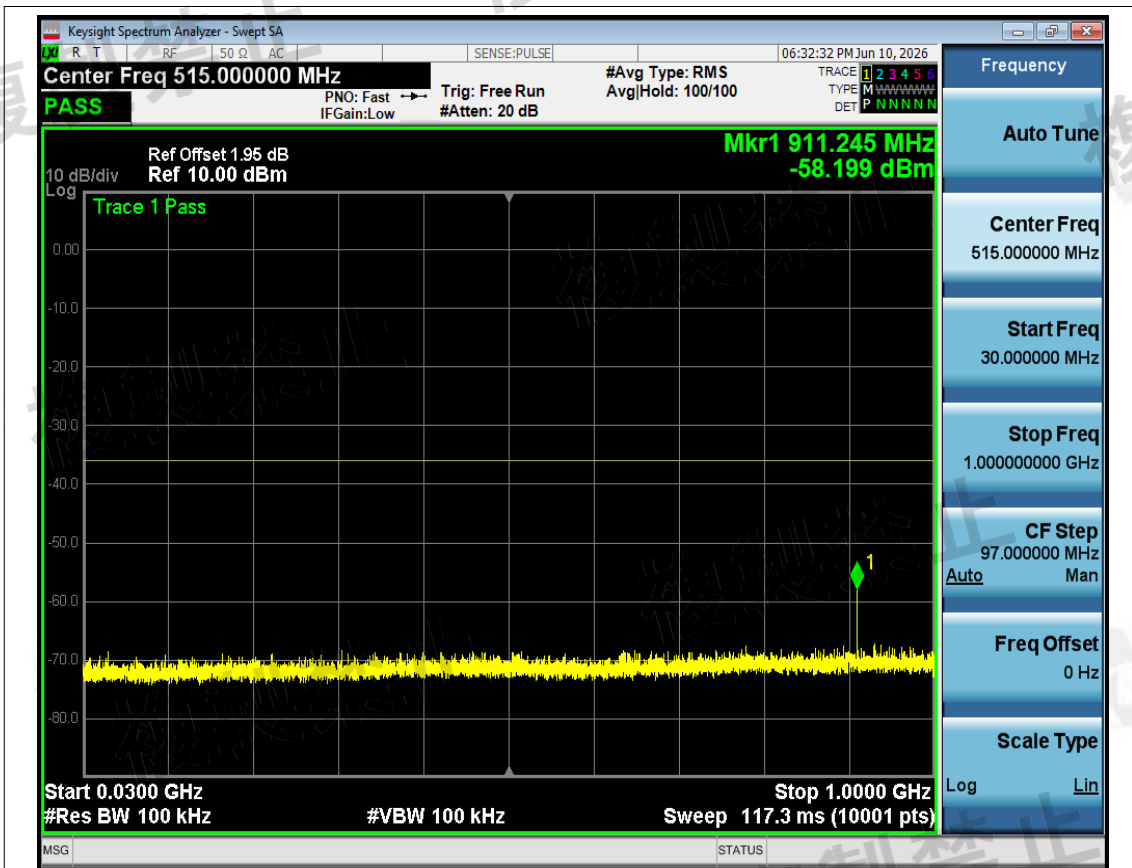


Tx. Spurious NVNT g 2472MHz Ant1 @ 30MHz-1000MHz

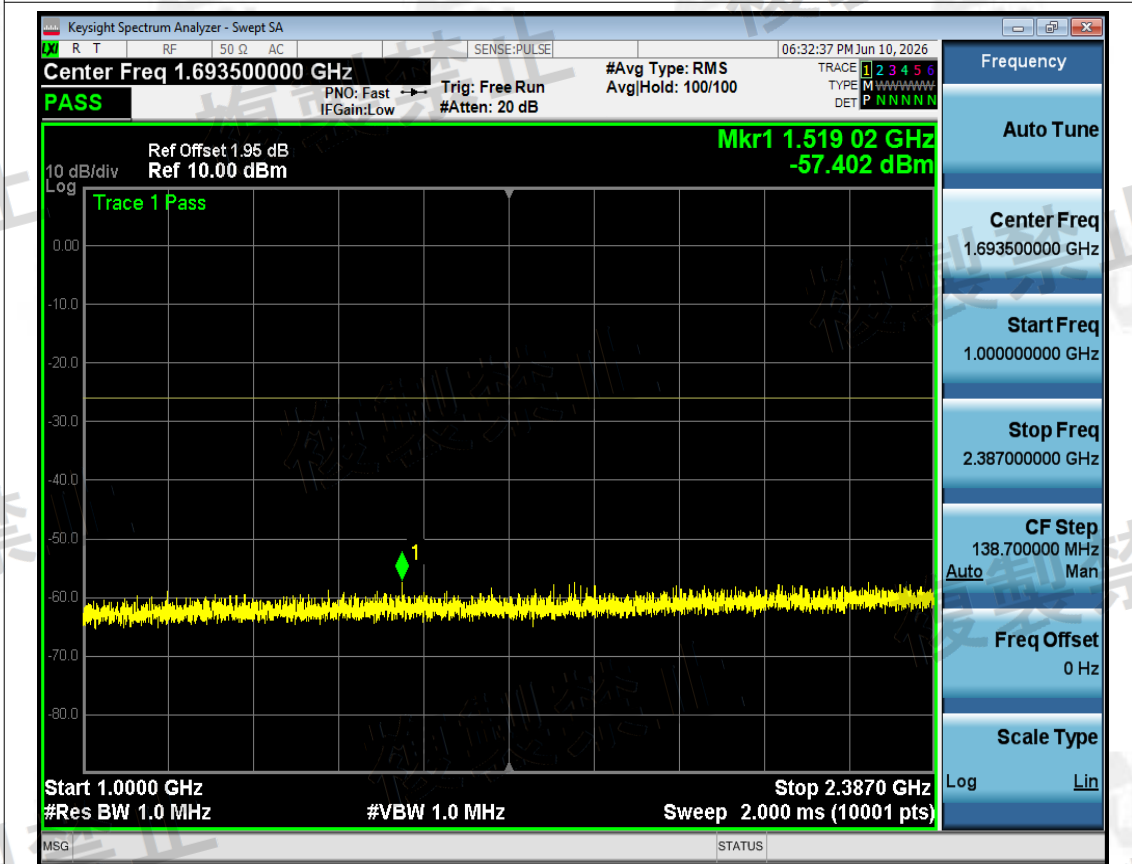


Tx. Spurious NVNT g 2472MHz Ant1 @ 1000MHz-2387MHz

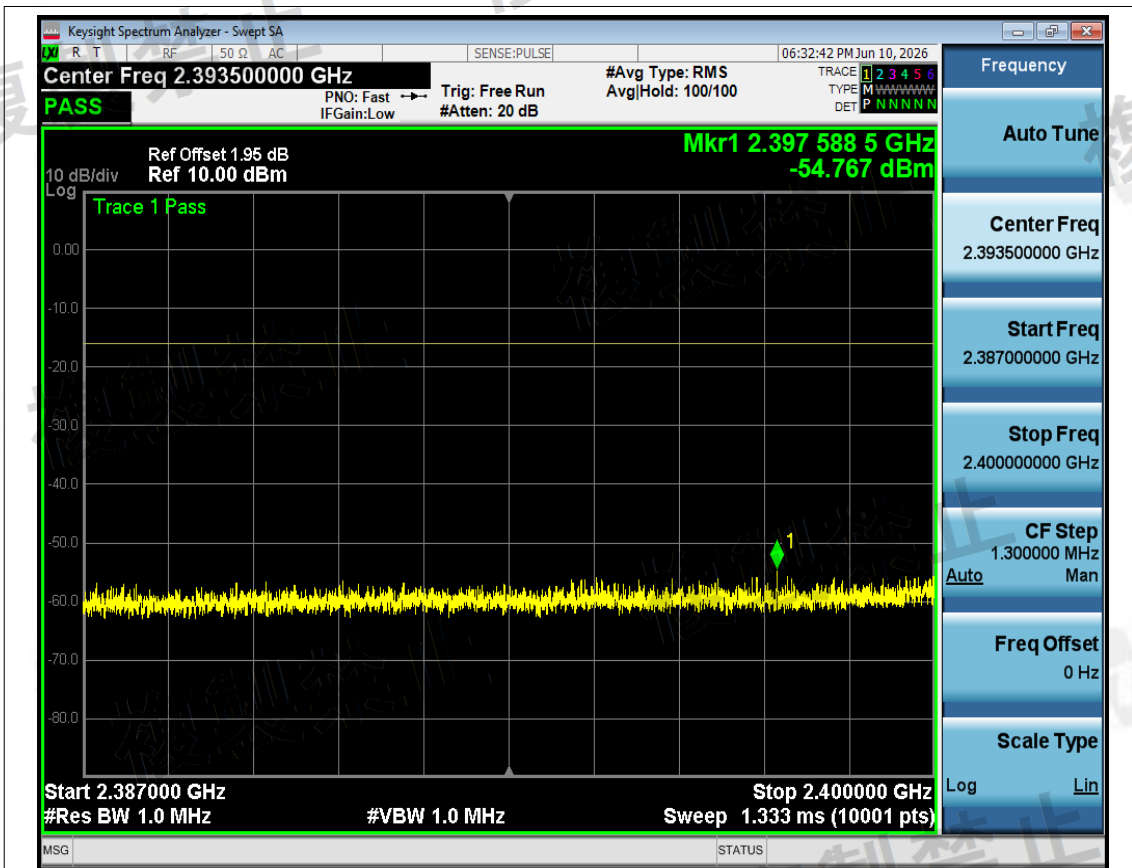


Tx. Spurious NVNT g 2472MHz Ant1 @ 2387MHz-2400MHz

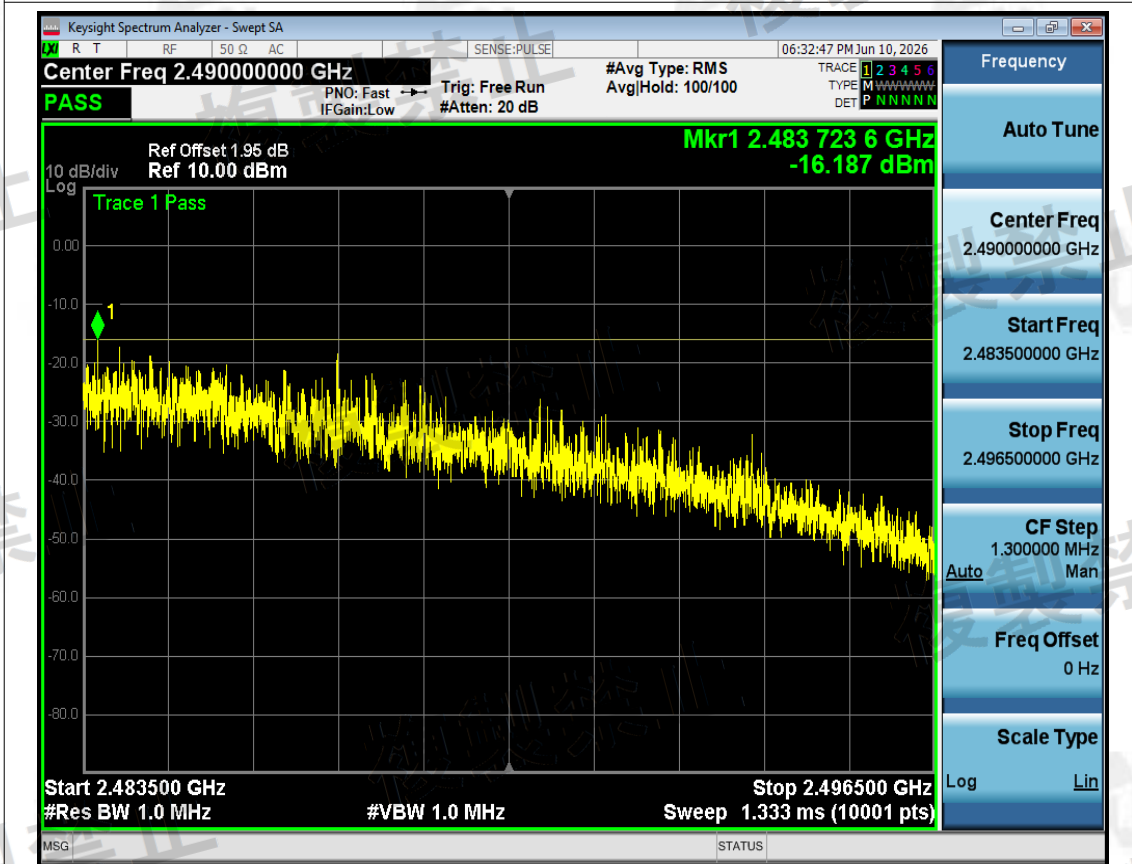


Tx. Spurious NVNT g 2472MHz Ant1 @ 2483.5MHz-2496.5MHz

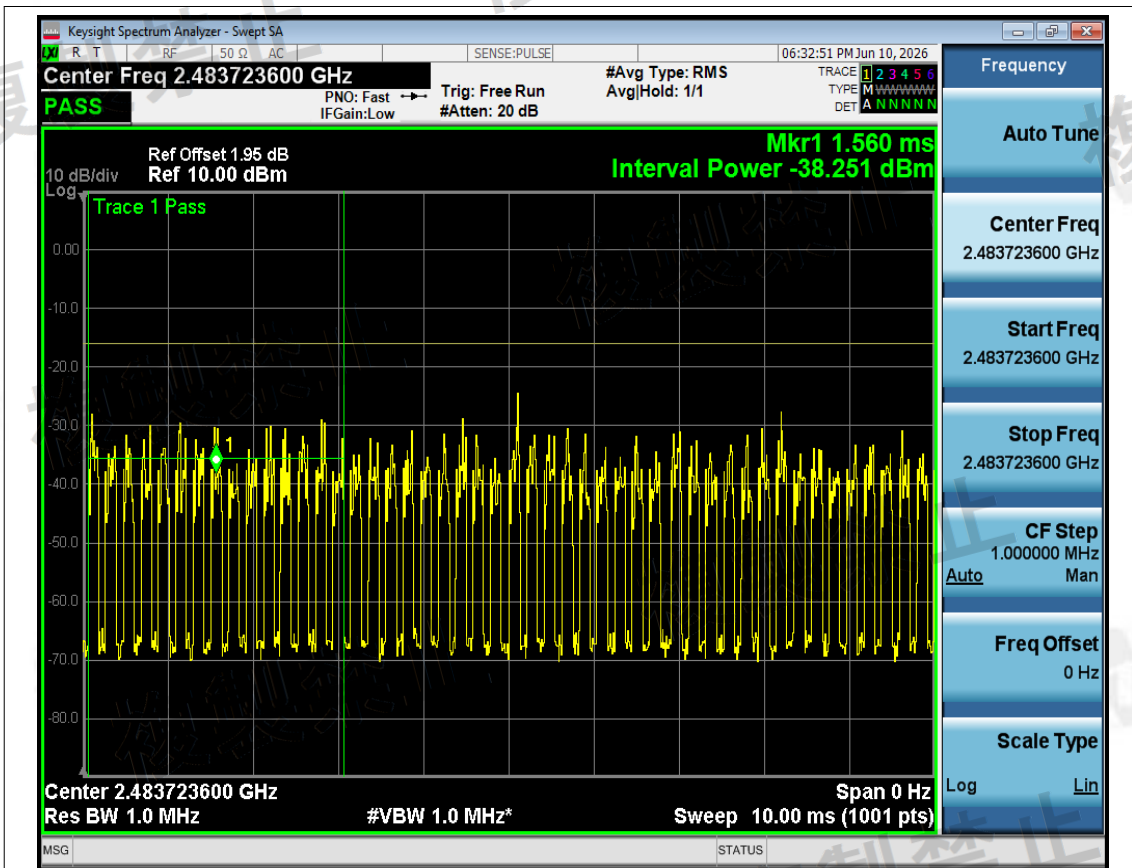


Tx. Spurious NVNT g 2472MHz Ant1 @ 2483.5MHz-2496.5MHz Final

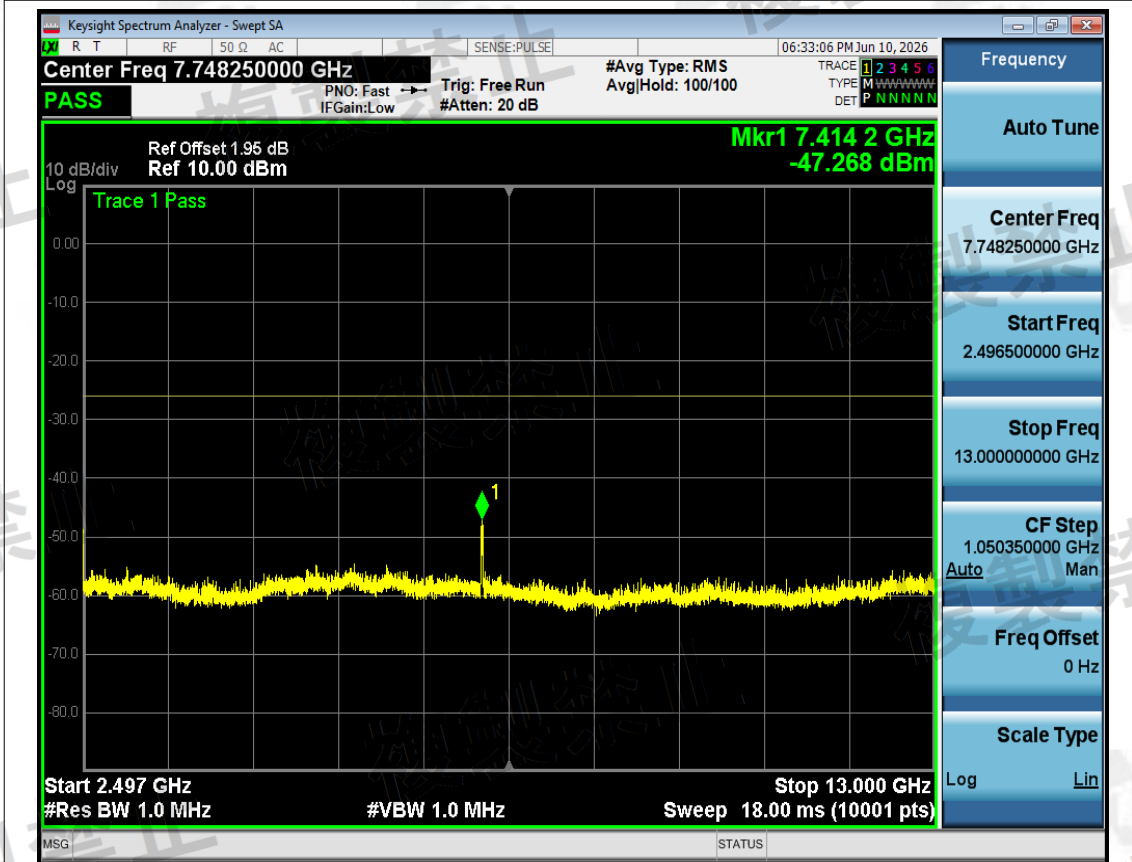


Tx. Spurious NVNT g 2472MHz Ant1 @ 2496.5MHz-13000MHz

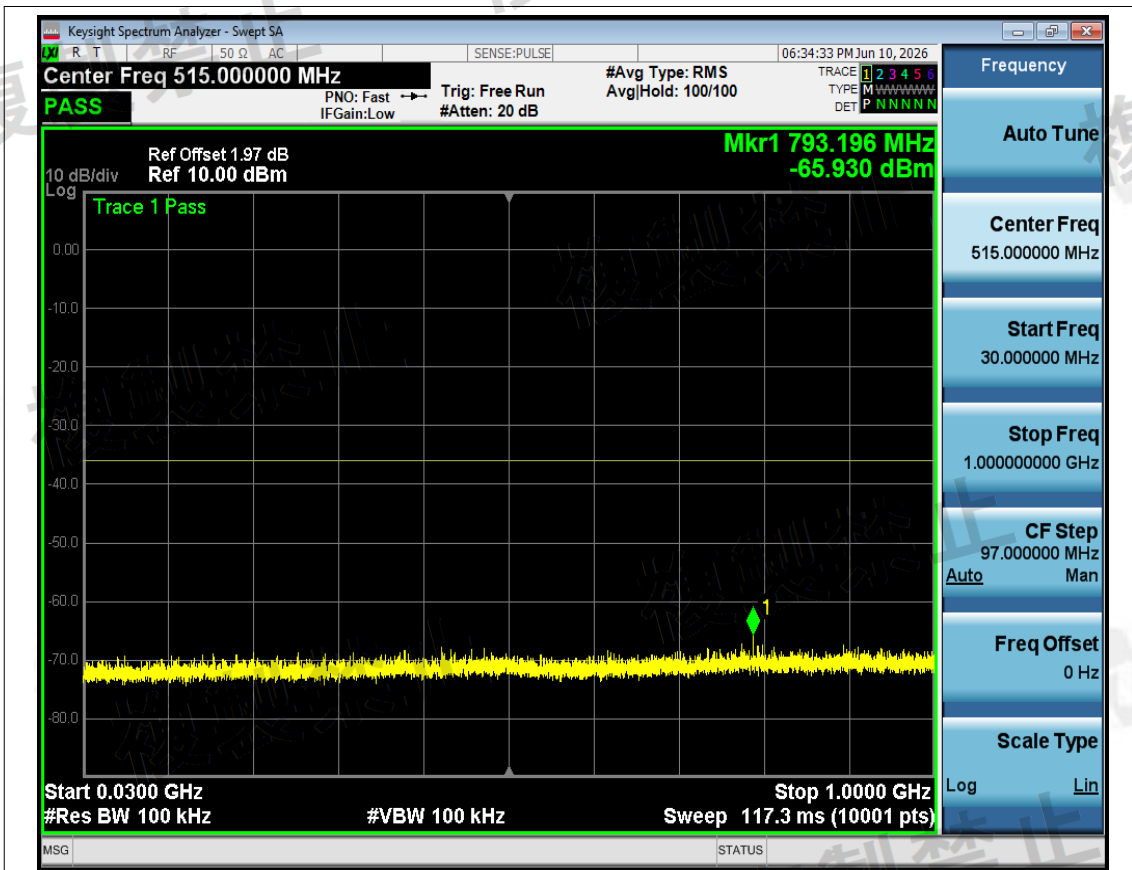


Tx. Spurious NVNT n20 2412MHz Ant1 @ 30MHz-1000MHz

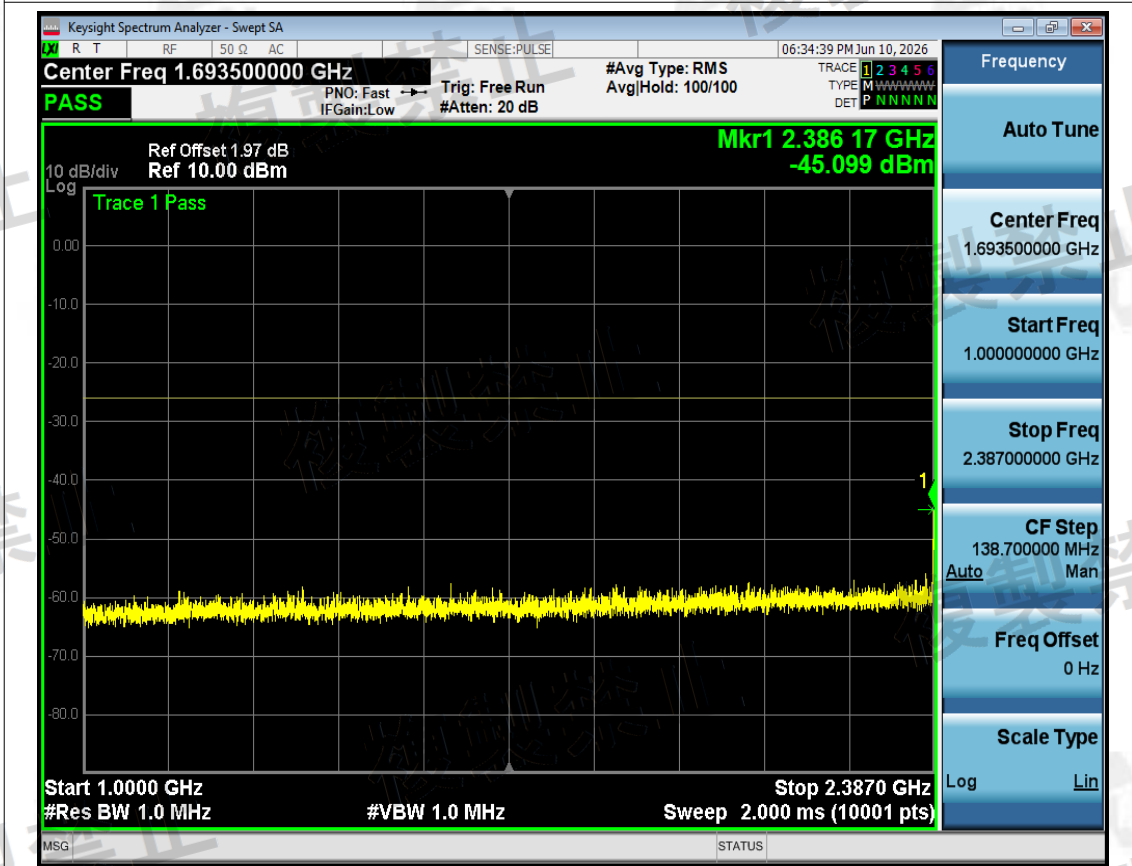


Tx. Spurious NVNT n20 2412MHz Ant1 @ 1000MHz-2387MHz

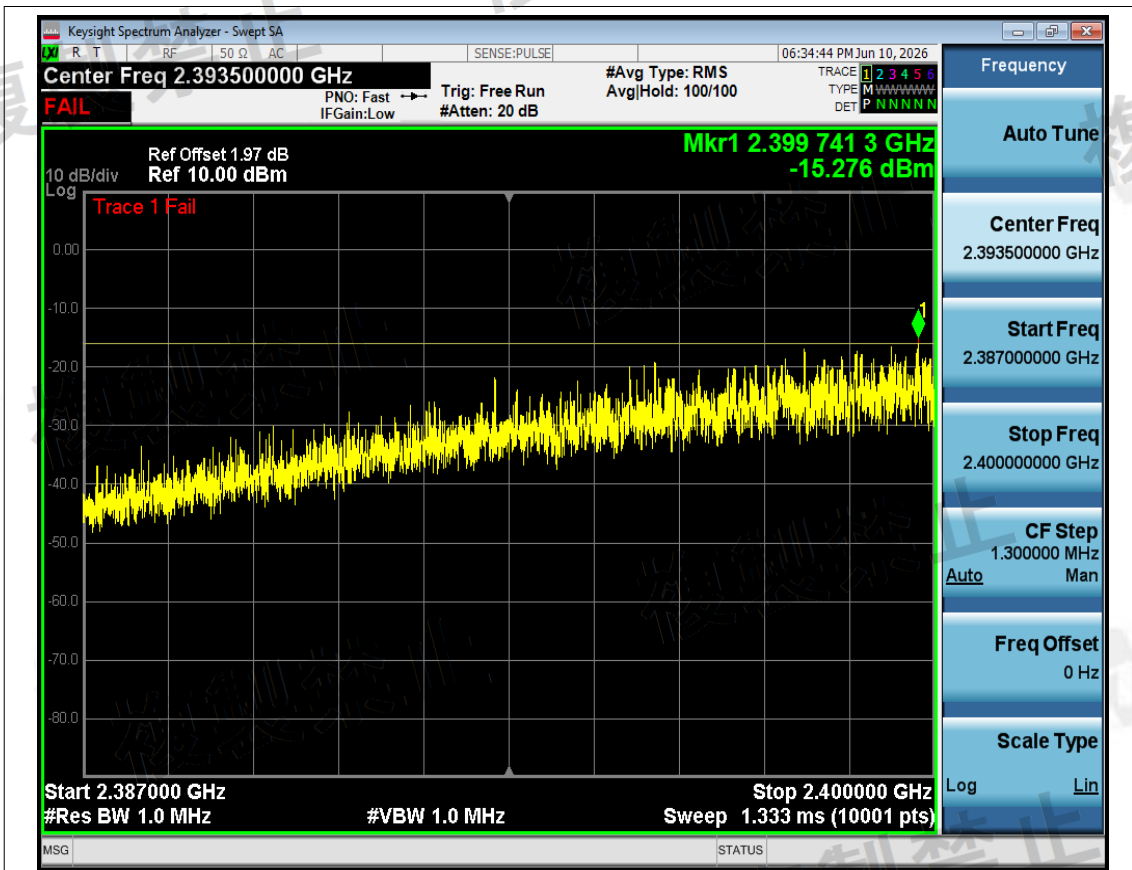


Tx. Spurious NVNT n20 2412MHz Ant1 @ 2387MHz-2400MHz

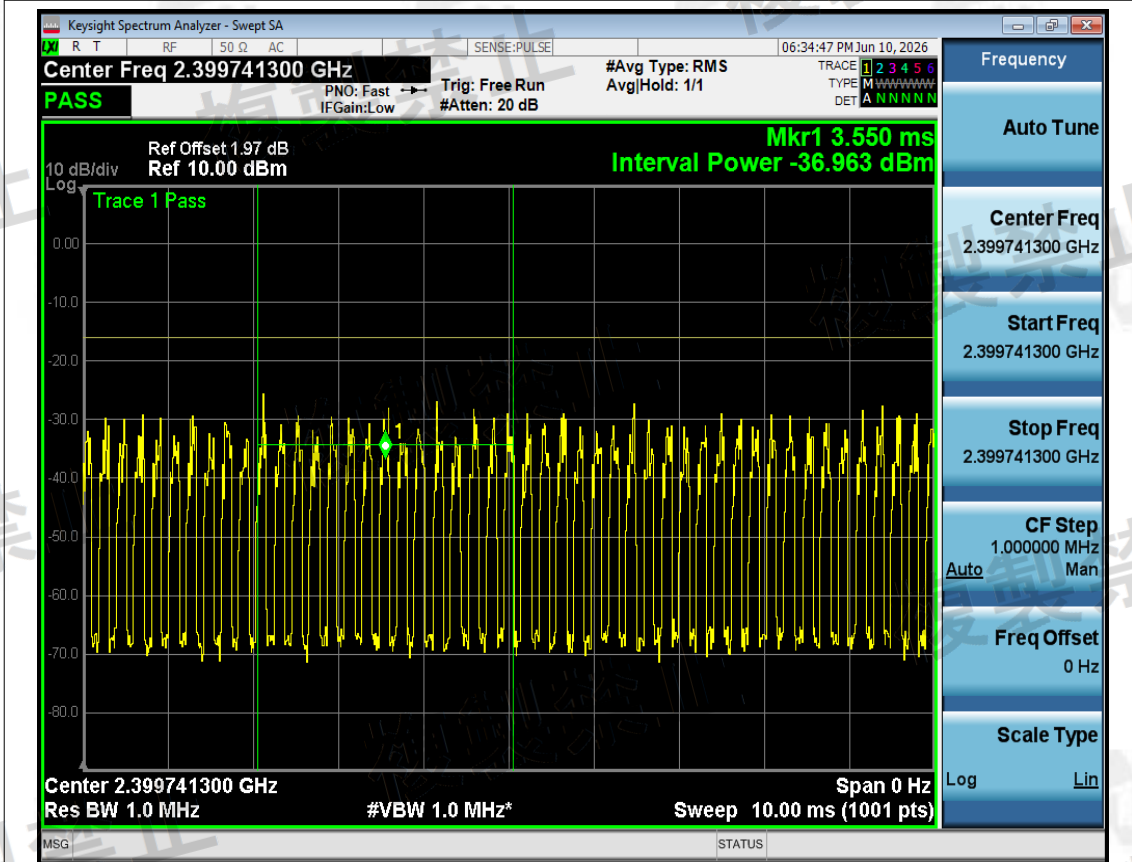


Tx. Spurious NVNT n20 2412MHz Ant1 @ 2387MHz-2400MHz Final

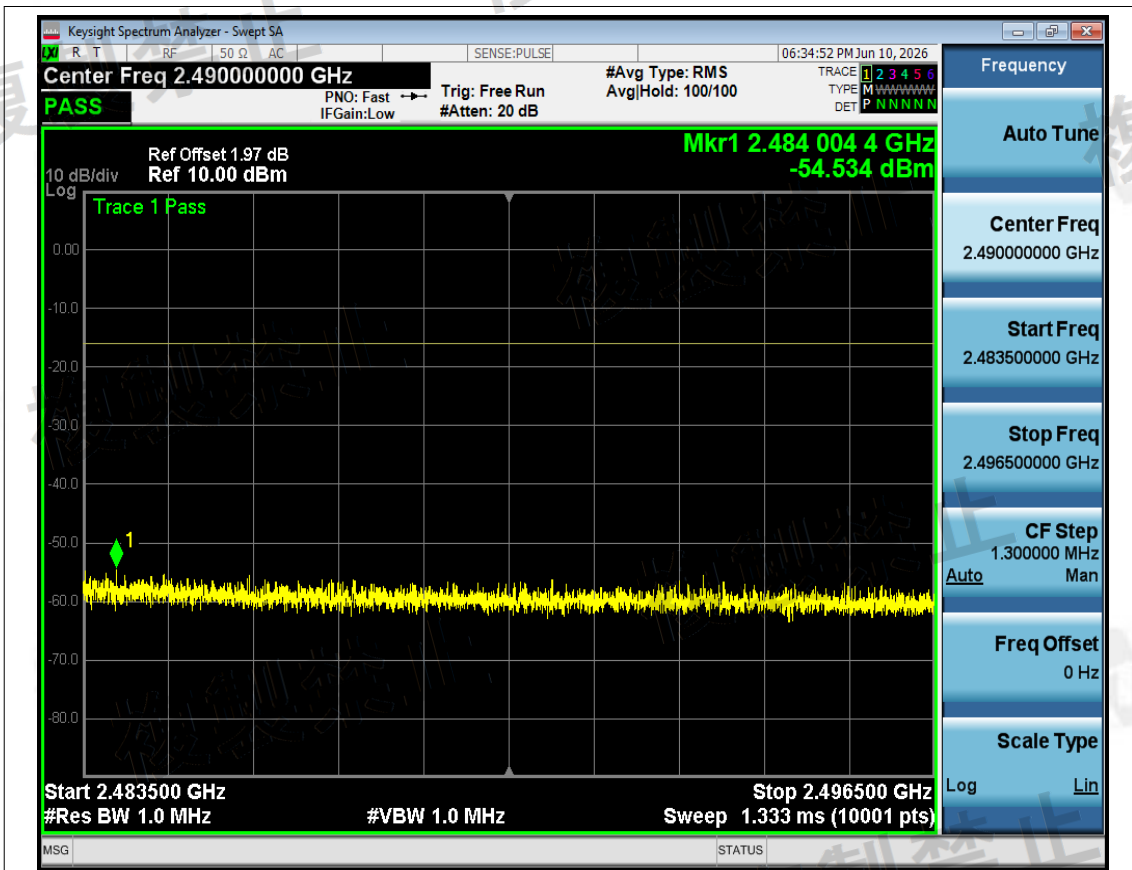


Tx. Spurious NVNT n20 2412MHz Ant1 @ 2483.5MHz-2496.5MHz

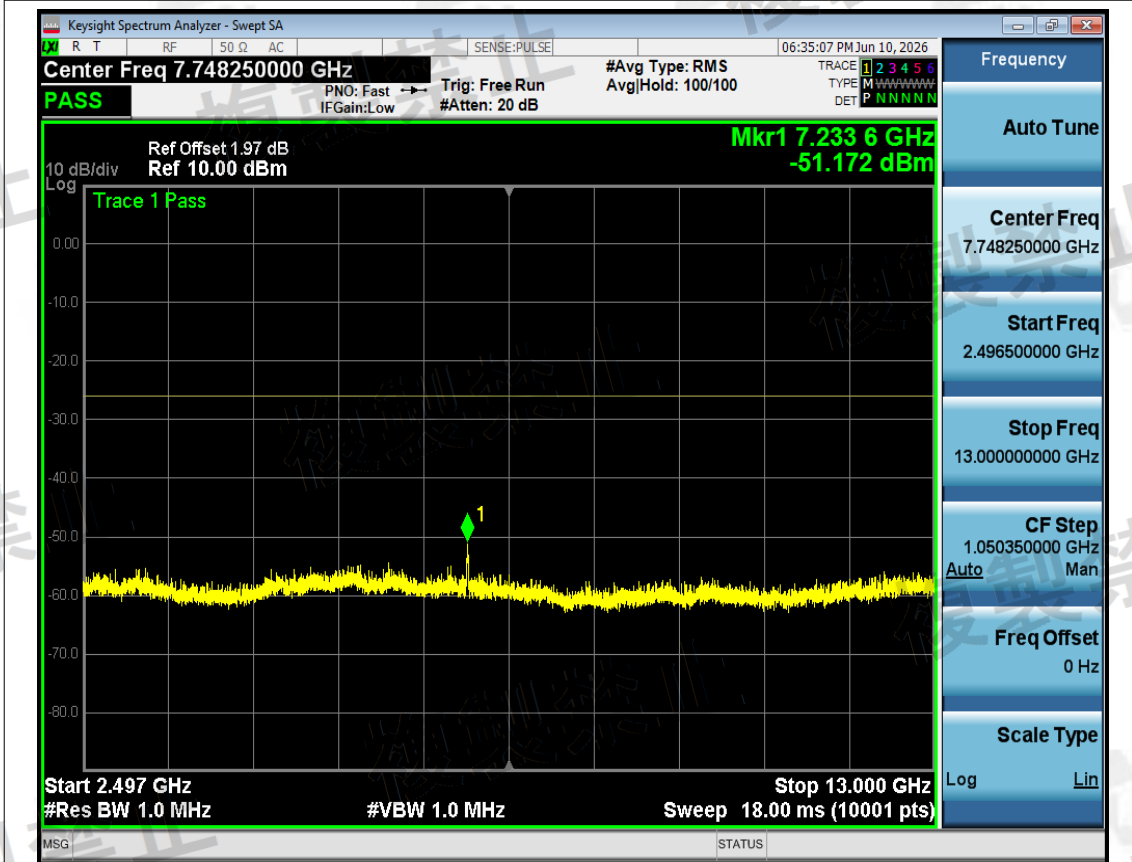


Tx. Spurious NVNT n20 2412MHz Ant1 @ 2496.5MHz-13000MHz

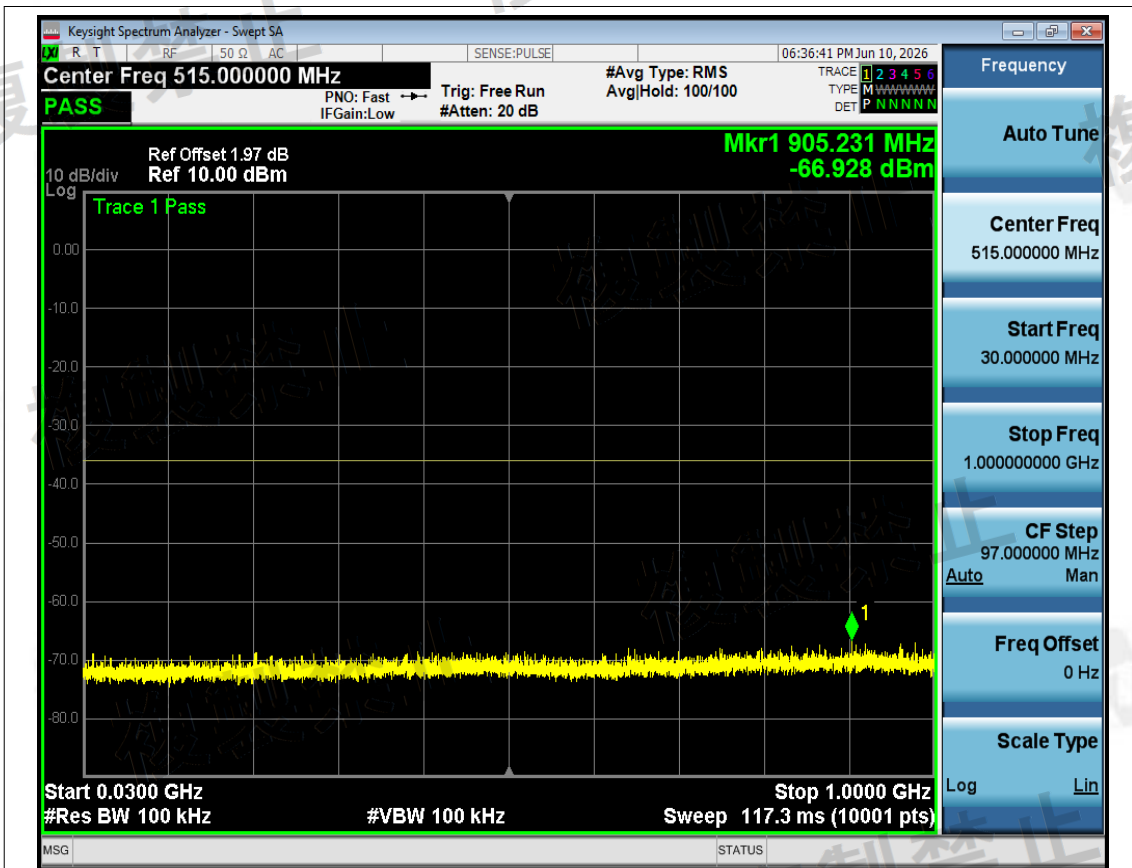


Tx. Spurious NVNT n20 2442MHz Ant1 @ 30MHz-1000MHz

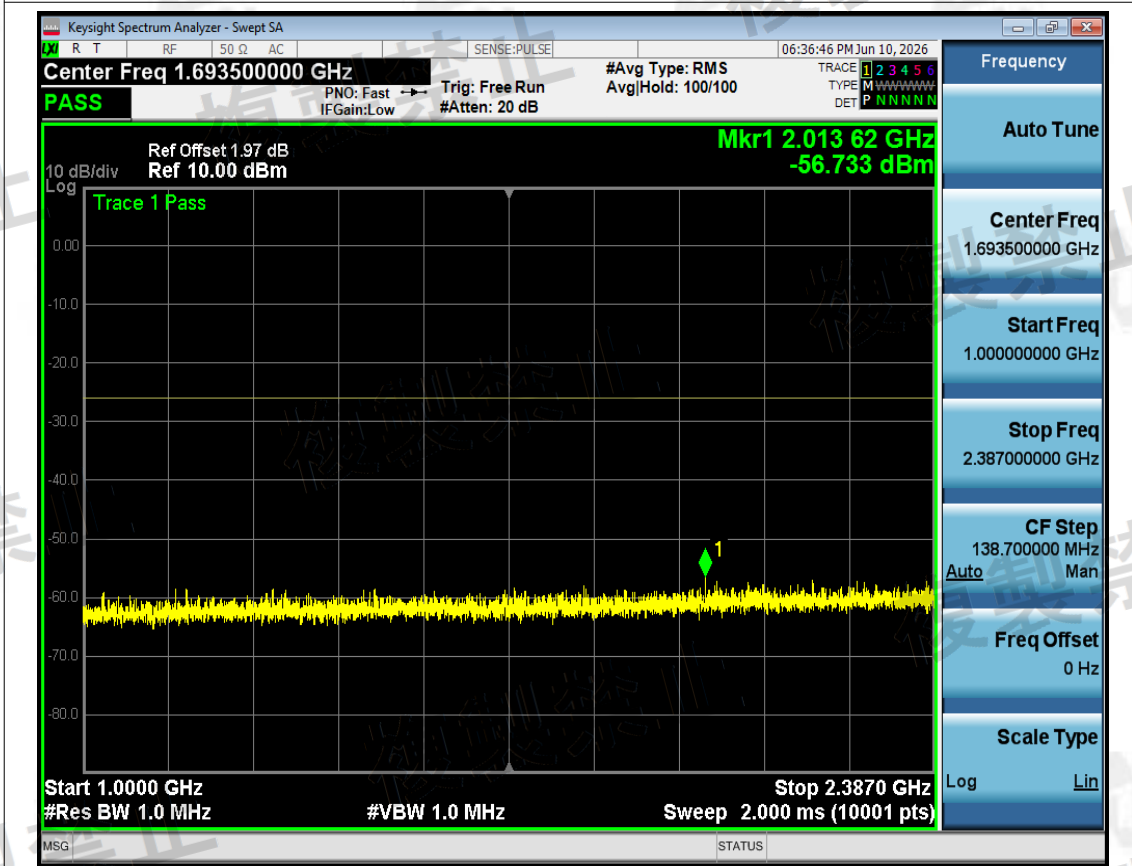

Tx. Spurious NVNT n20 2442MHz Ant1 @ 1000MHz-2387MHz

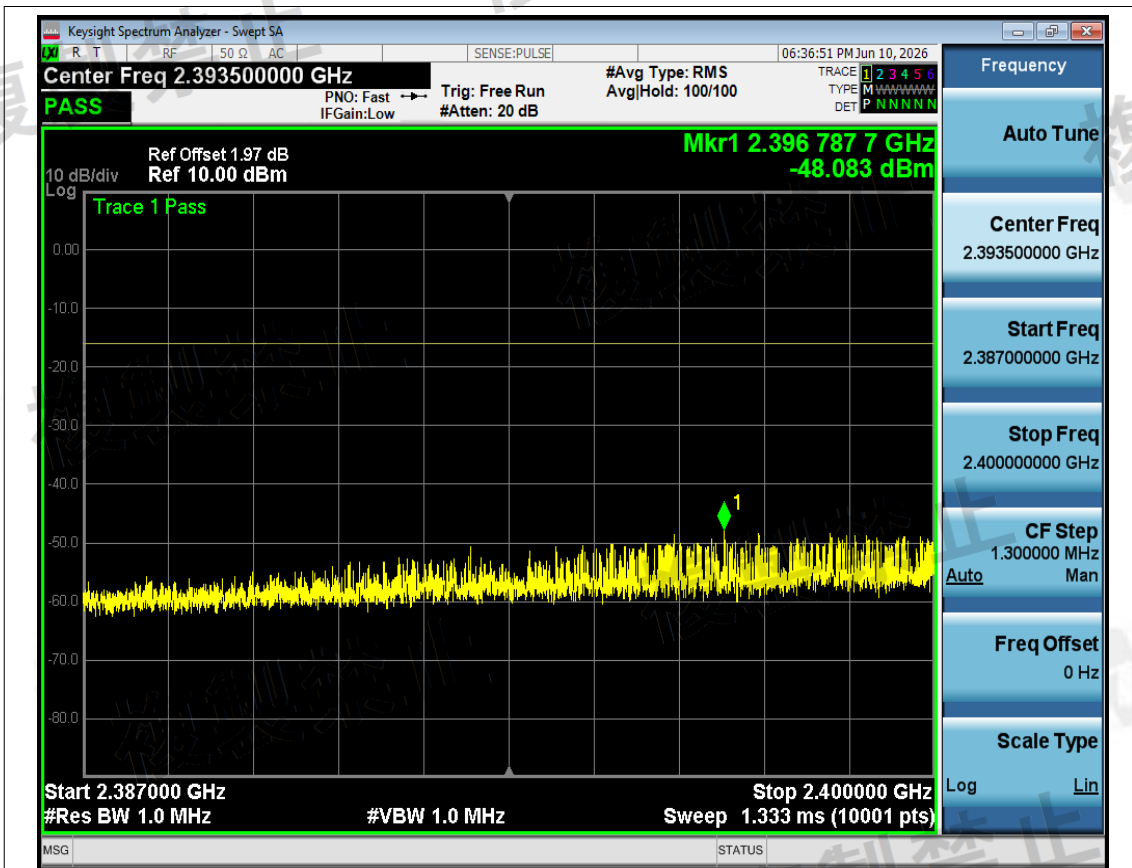


Tx. Spurious NVNT n20 2442MHz Ant1 @ 2387MHz-2400MHz

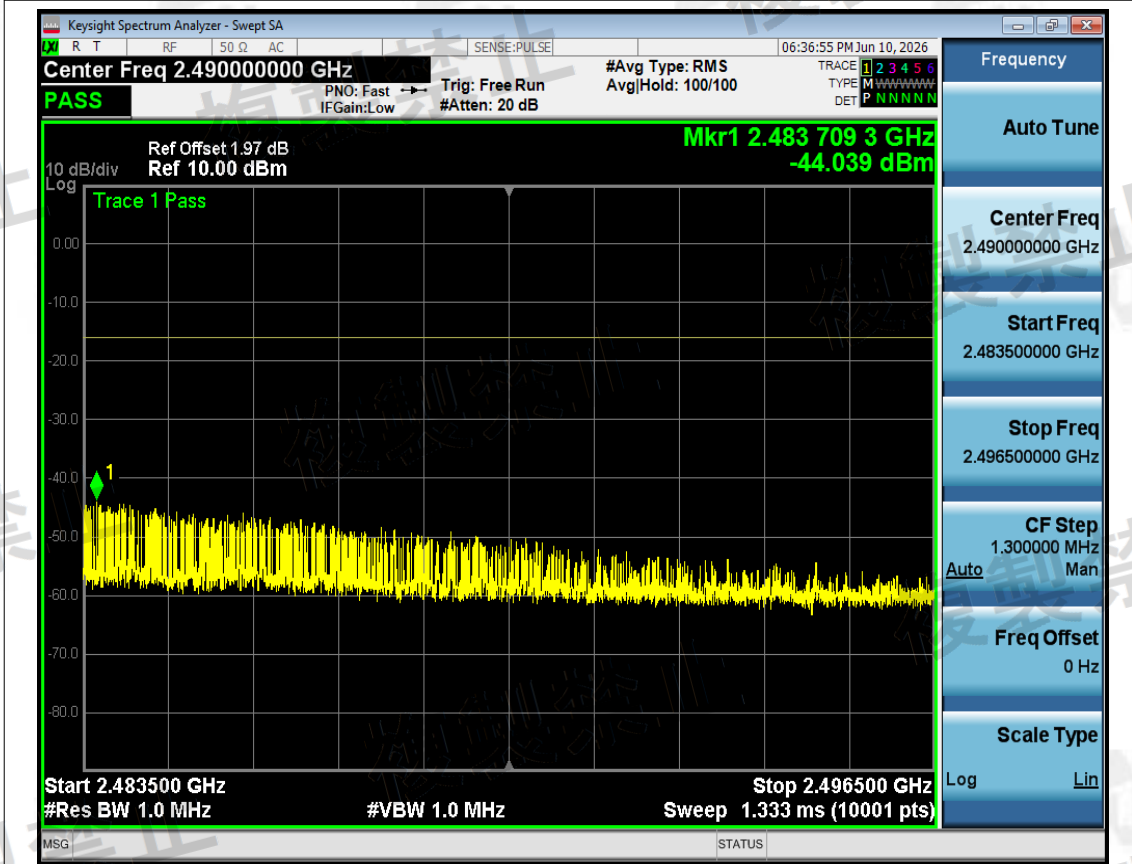


Tx. Spurious NVNT n20 2442MHz Ant1 @ 2483.5MHz-2496.5MHz




Tx. Spurious NVNT n20 2442MHz Ant1 @ 2496.5MHz-13000MHz

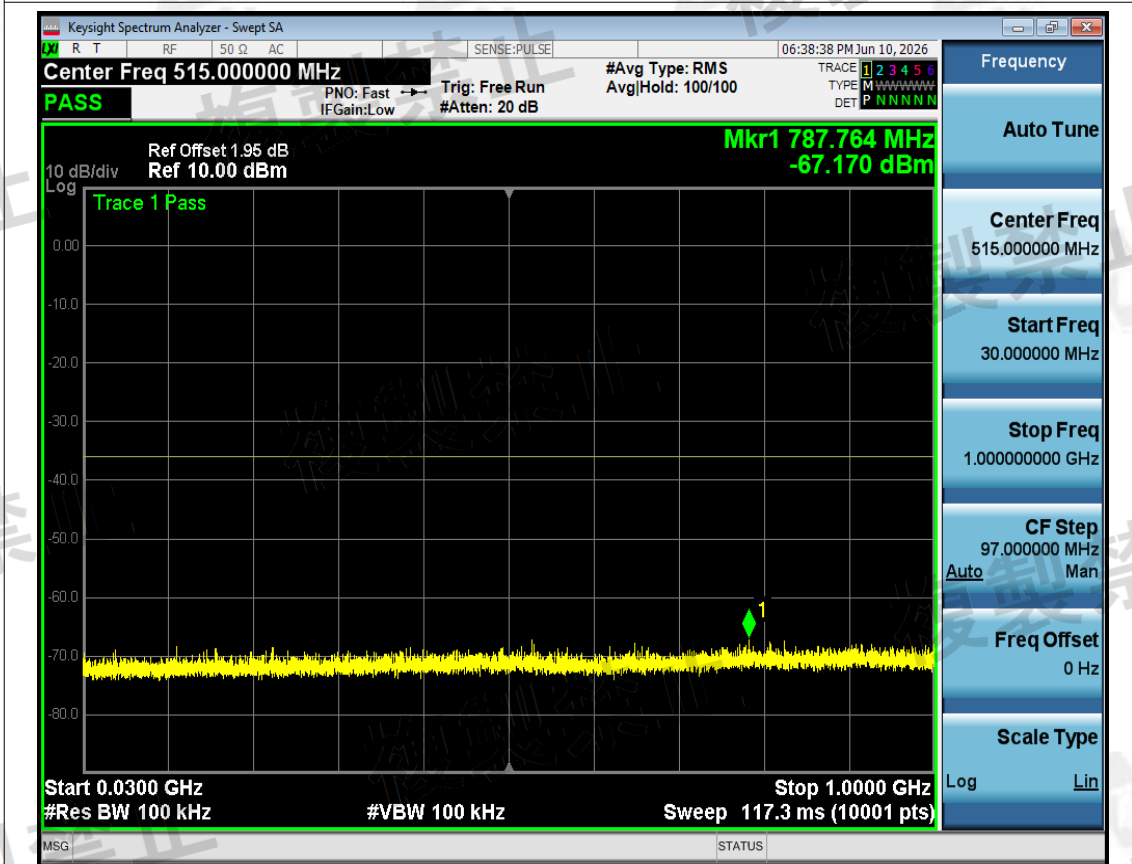


Tx. Spurious NVNT n20 2472MHz Ant1 @ 30MHz-1000MHz

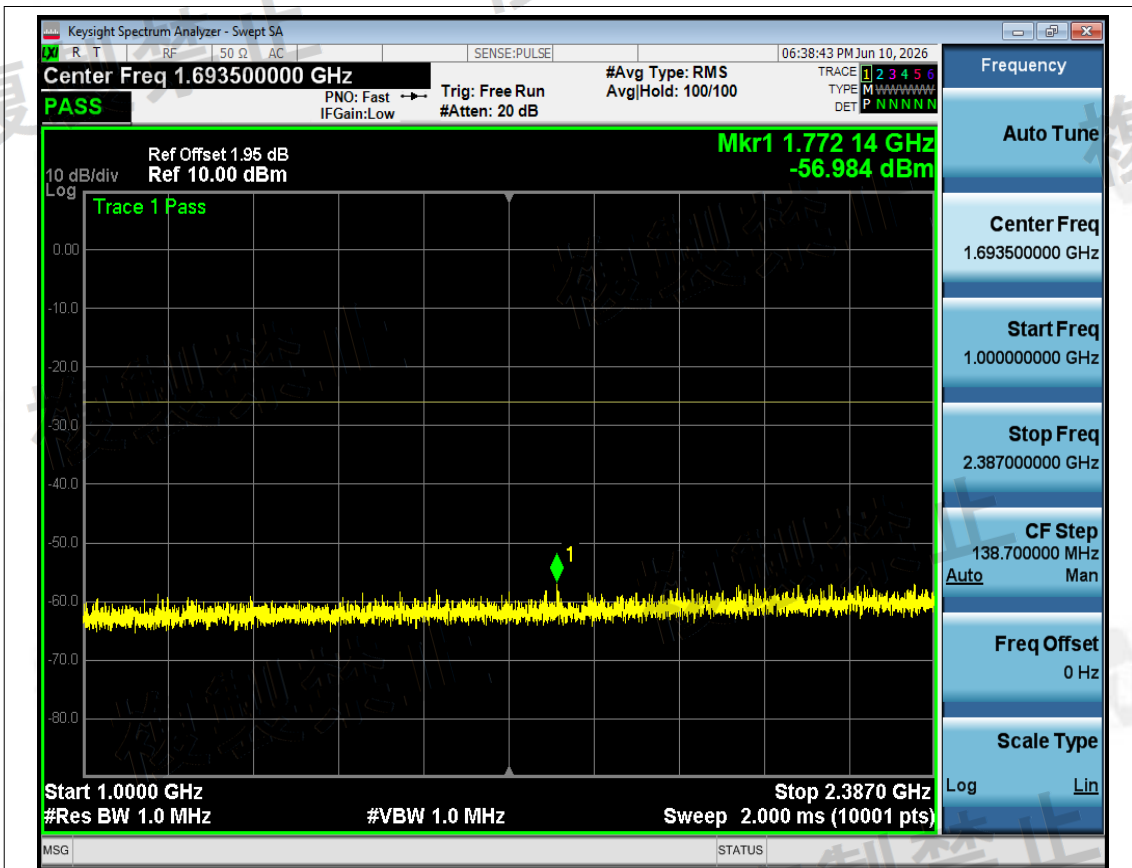


Tx. Spurious NVNT n20 2472MHz Ant1 @ 1000MHz-2387MHz

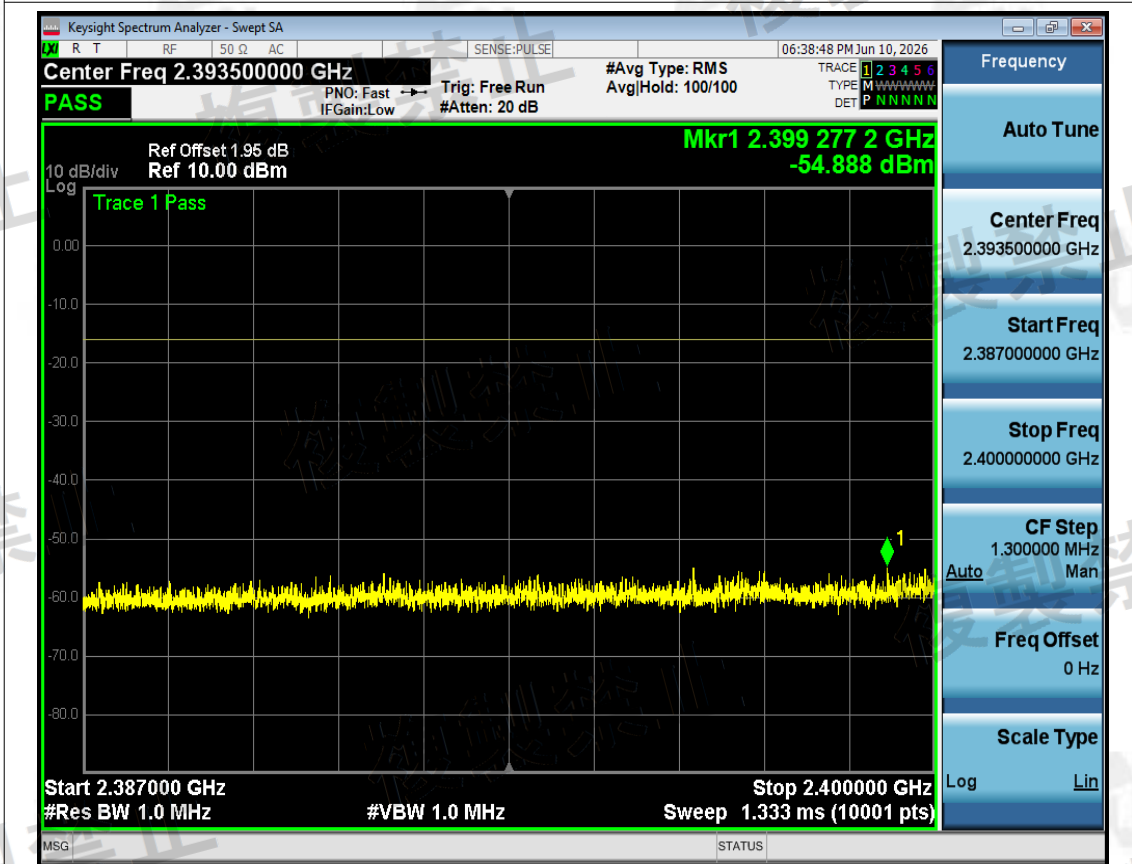

Tx. Spurious NVNT n20 2472MHz Ant1 @ 2387MHz-2400MHz

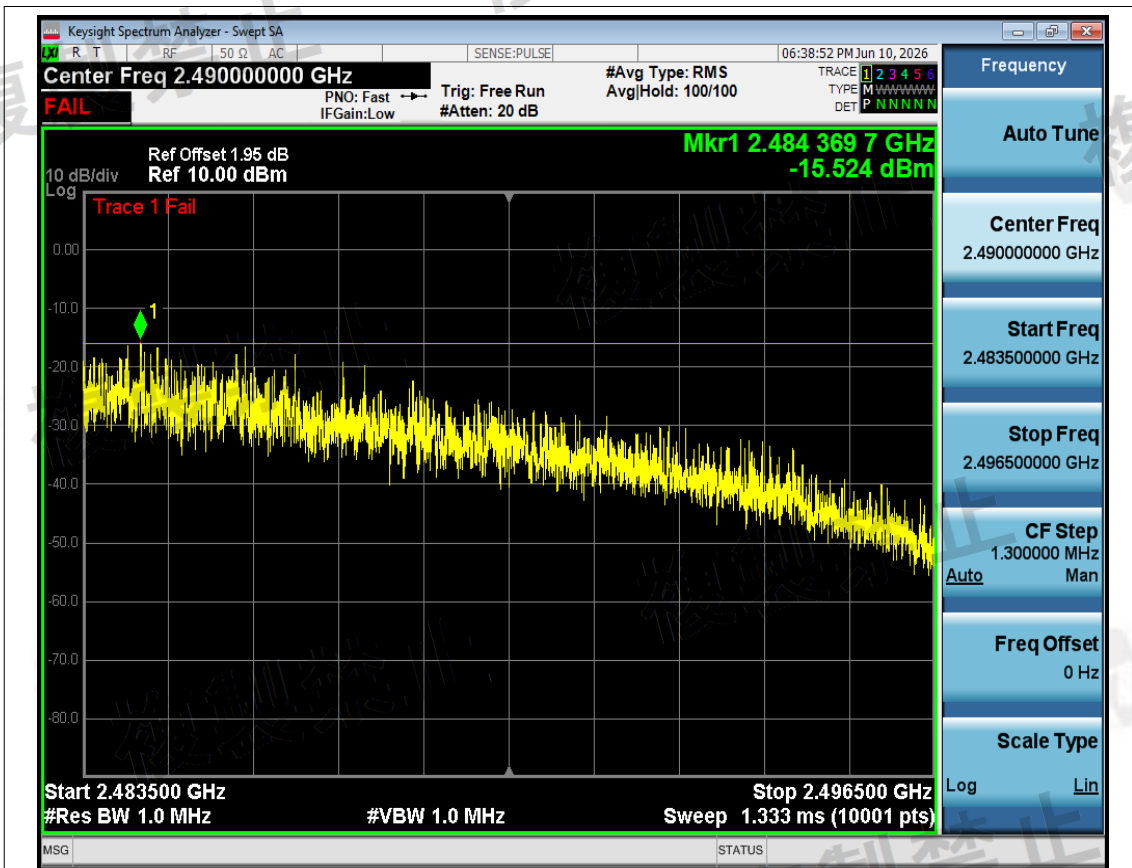


Tx. Spurious NVNT n20 2472MHz Ant1 @ 2483.5MHz-2496.5MHz

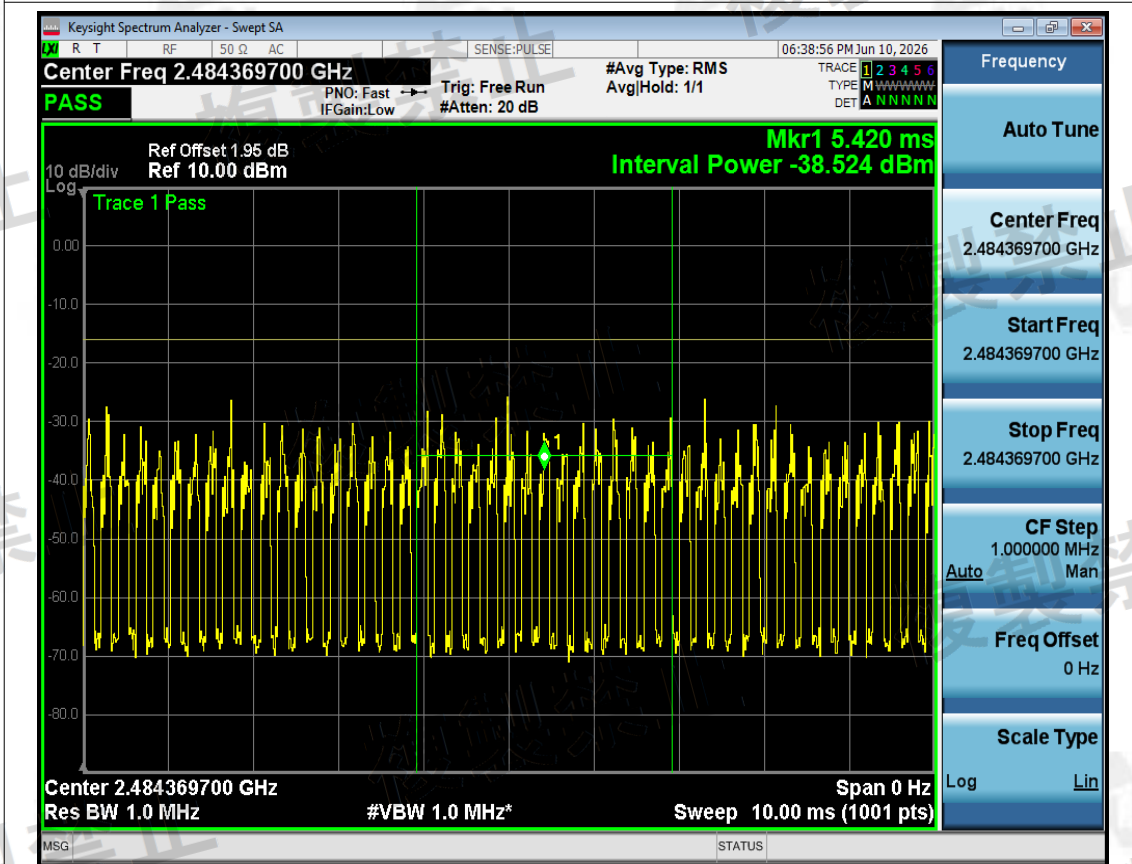


Tx. Spurious NVNT n20 2472MHz Ant1 @ 2483.5MHz-2496.5MHz Final



Tx. Spurious NVNT n20 2472MHz Ant1 @ 2496.5MHz-13000MHz

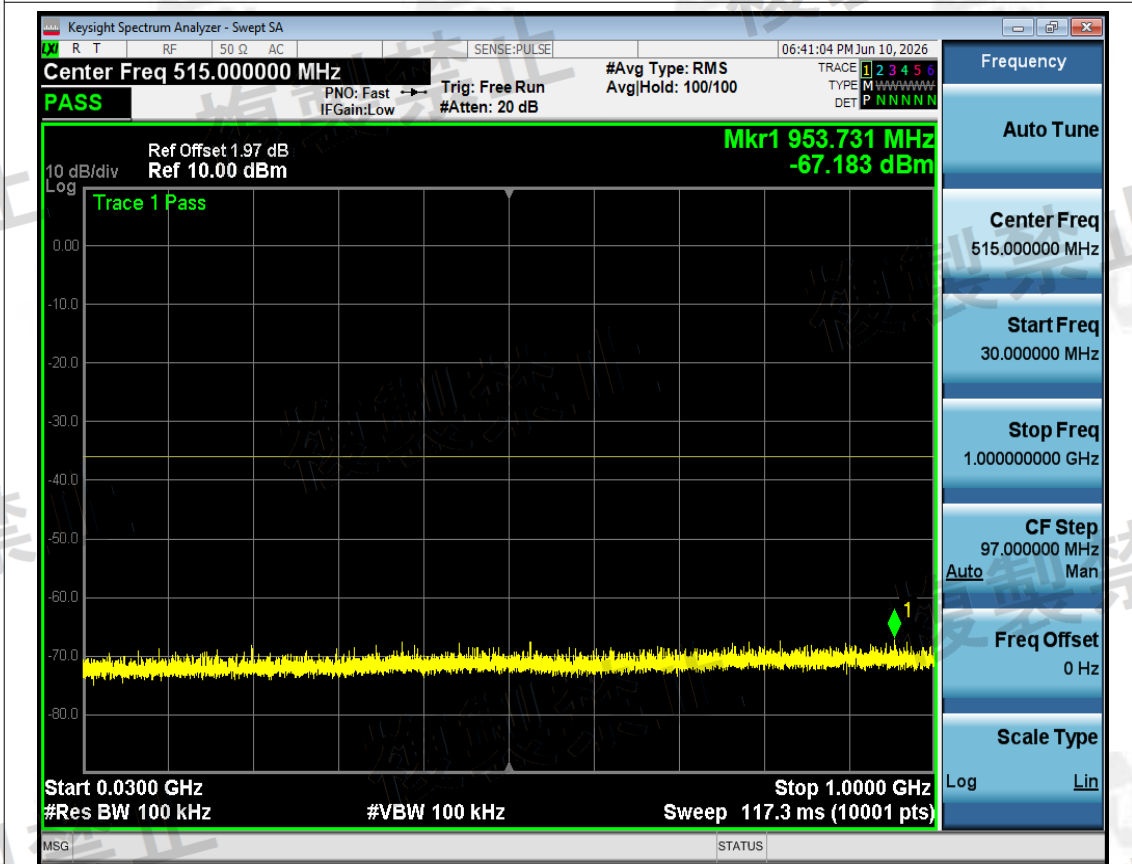


Tx. Spurious NVNT n40 2422MHz Ant1 @ 30MHz-1000MHz

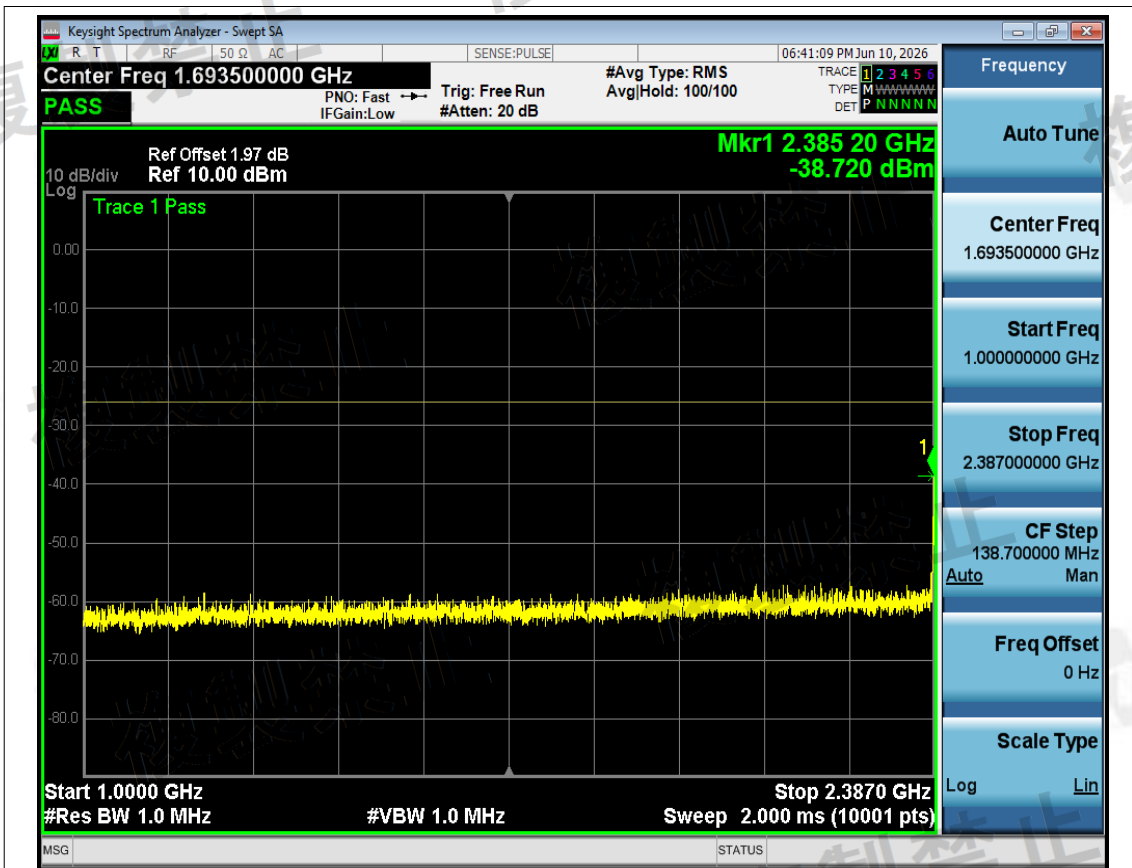


Tx. Spurious NVNT n40 2422MHz Ant1 @ 1000MHz-2387MHz




Tx. Spurious NVNT n40 2422MHz Ant1 @ 2387MHz-2400MHz

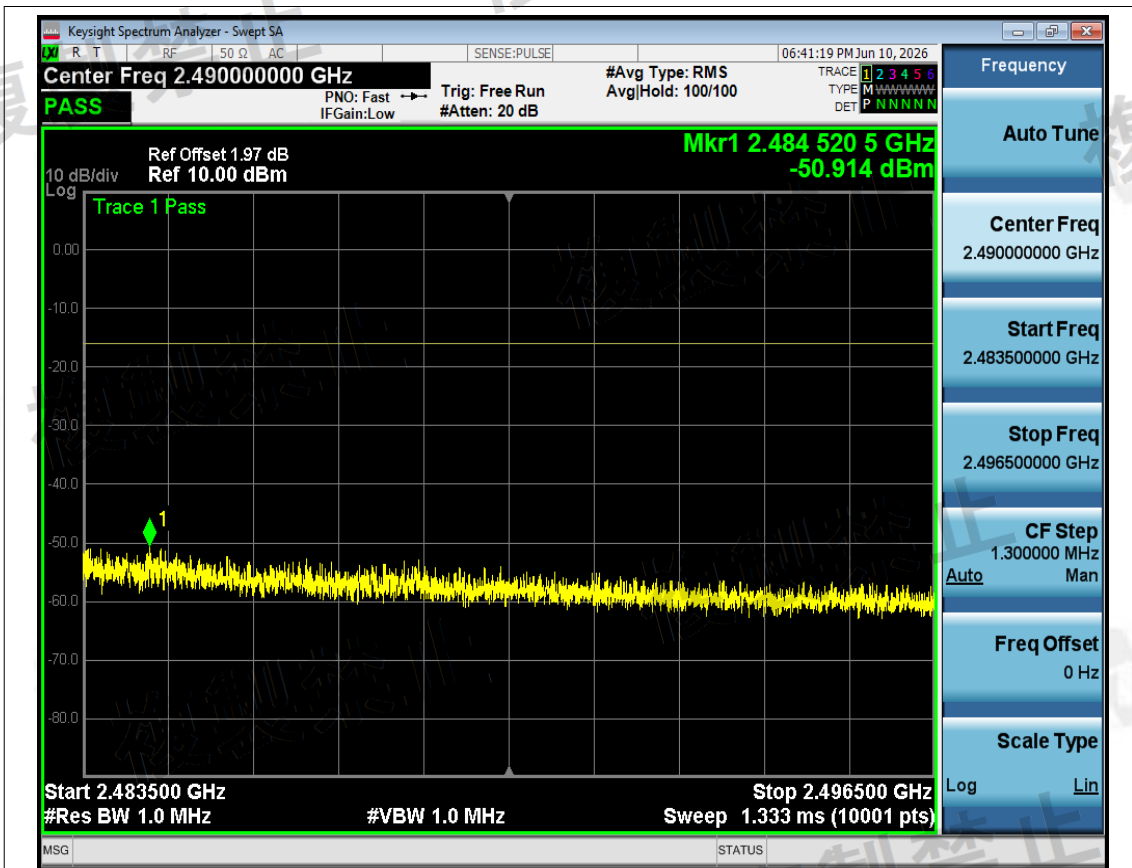


Tx. Spurious NVNT n40 2422MHz Ant1 @ 2483.5MHz-2496.5MHz

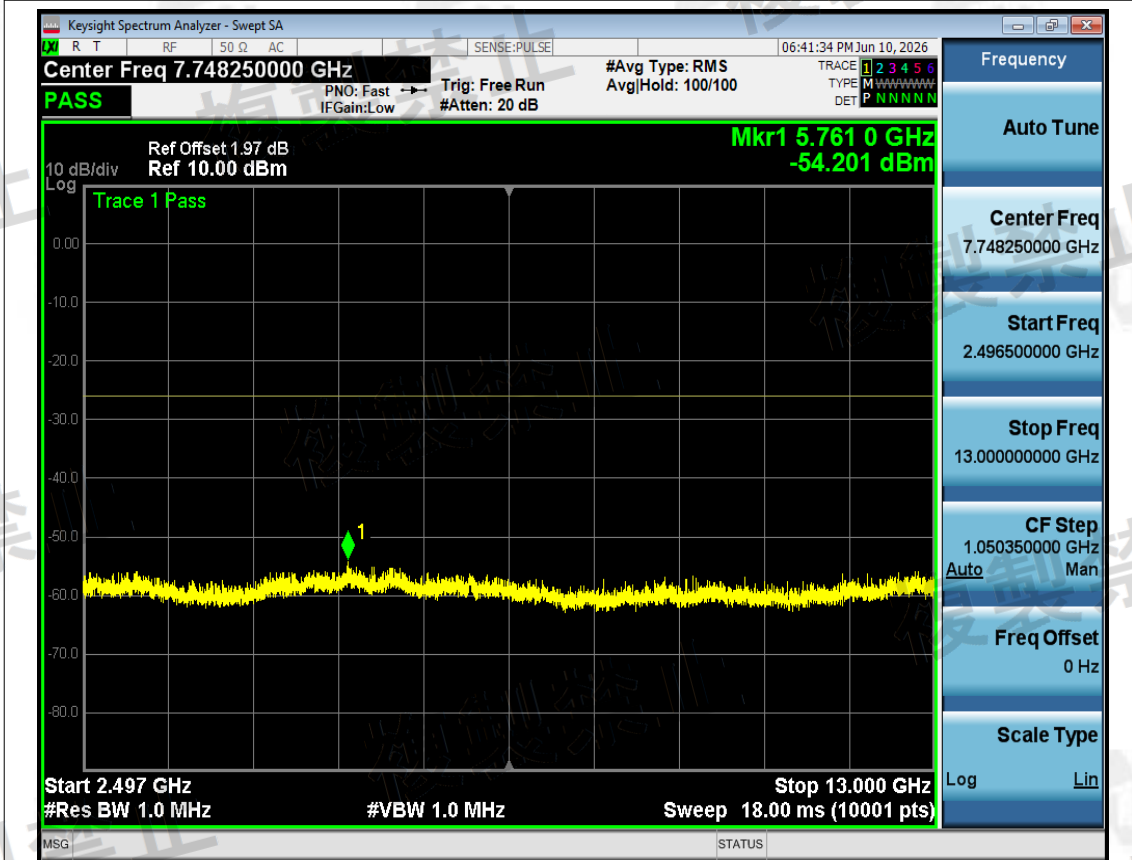


Tx. Spurious NVNT n40 2422MHz Ant1 @ 2496.5MHz-13000MHz

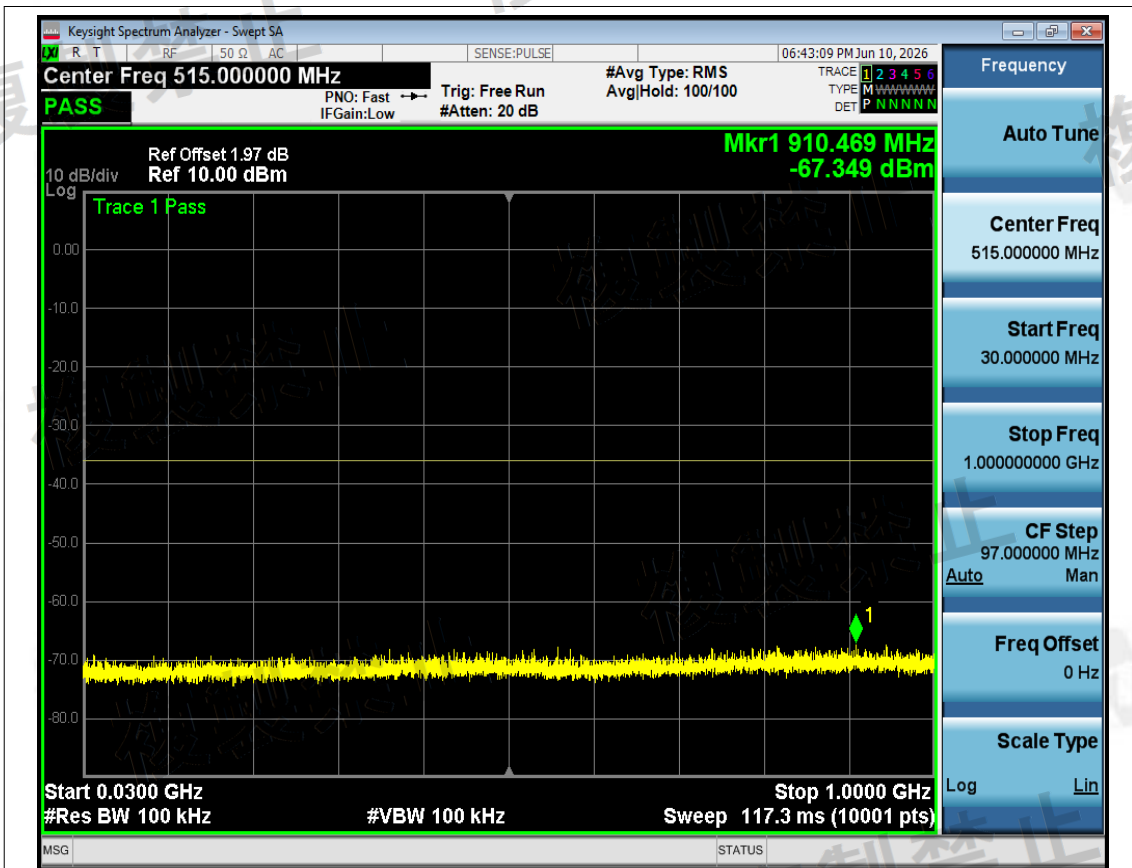


Tx. Spurious NVNT n40 2442MHz Ant1 @ 30MHz-1000MHz

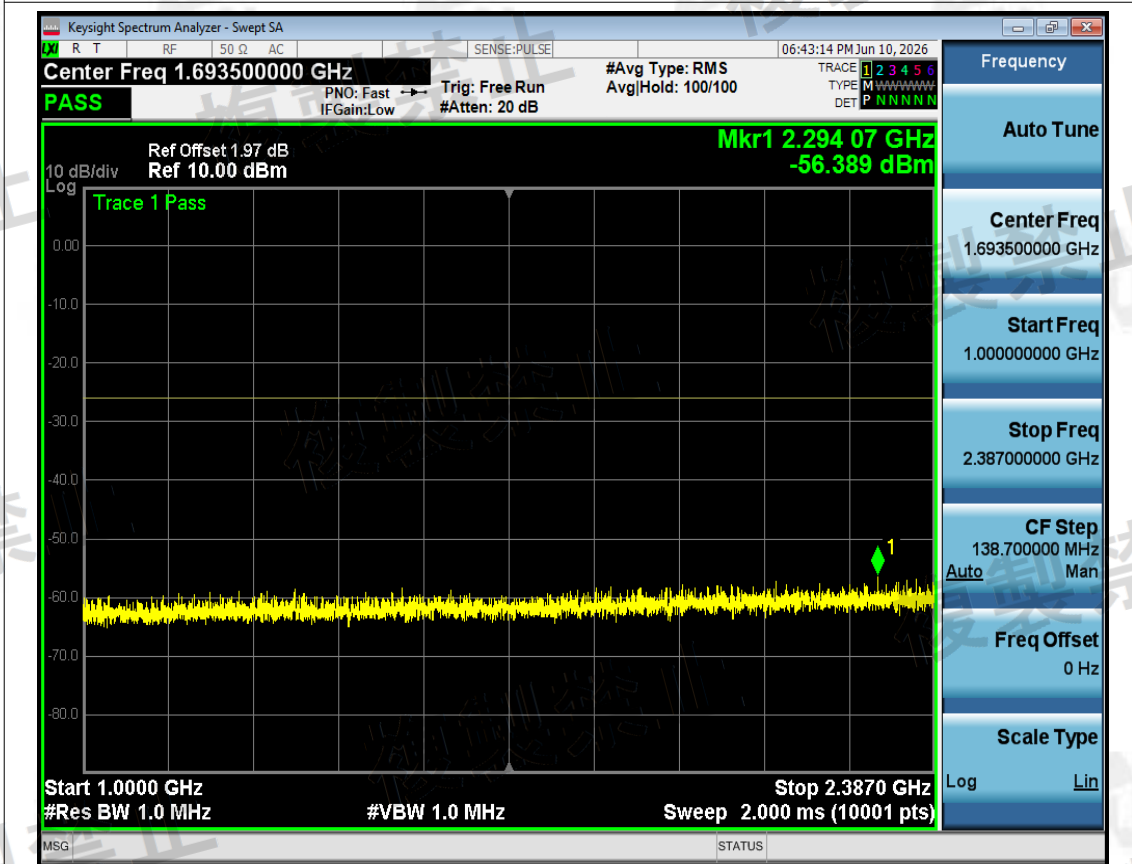

Tx. Spurious NVNT n40 2442MHz Ant1 @ 1000MHz-2387MHz

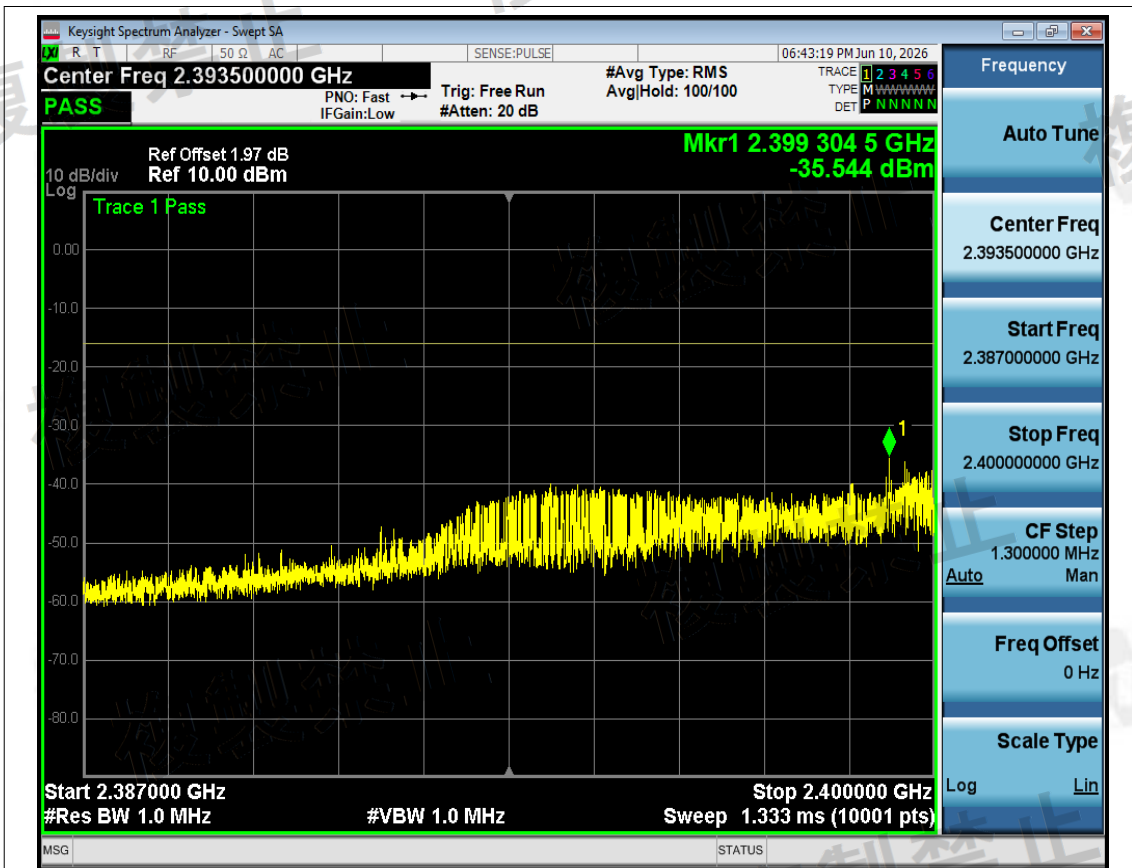


Tx. Spurious NVNT n40 2442MHz Ant1 @ 2387MHz-2400MHz

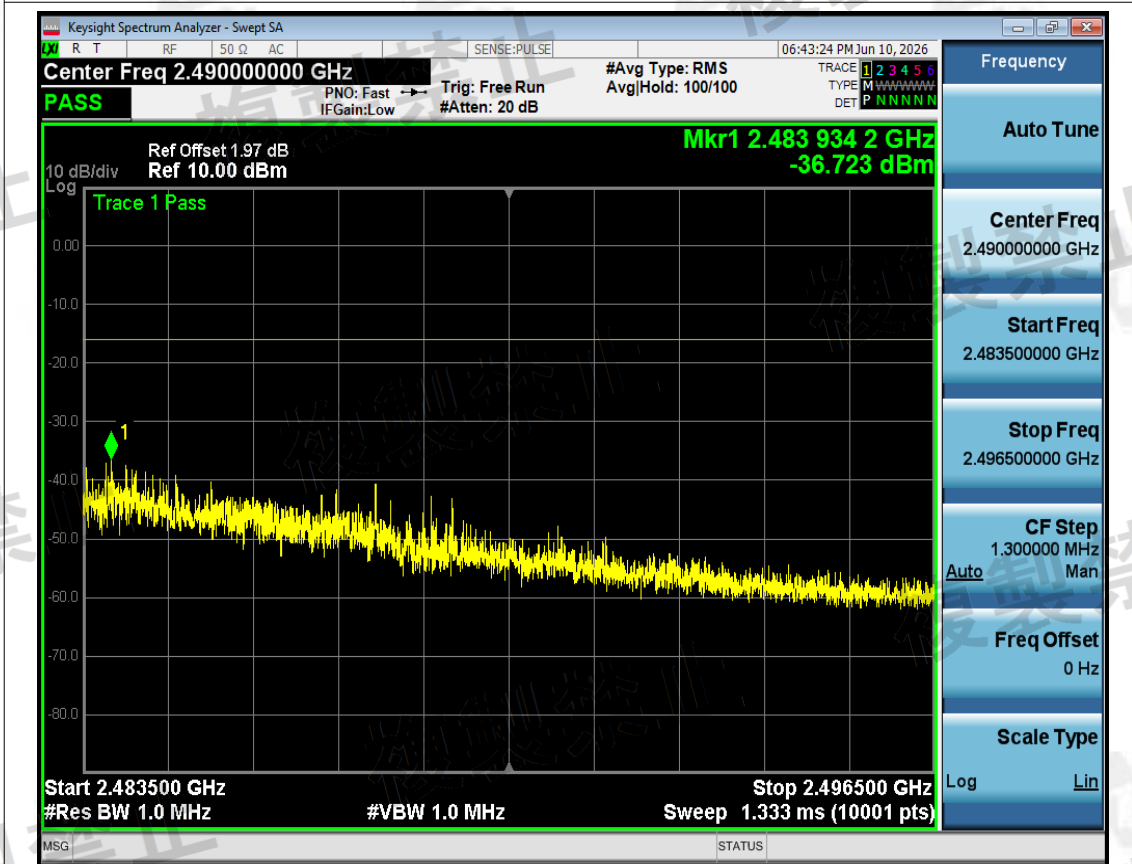


Tx. Spurious NVNT n40 2442MHz Ant1 @ 2483.5MHz-2496.5MHz




Tx. Spurious NVNT n40 2442MHz Ant1 @ 2496.5MHz-13000MHz

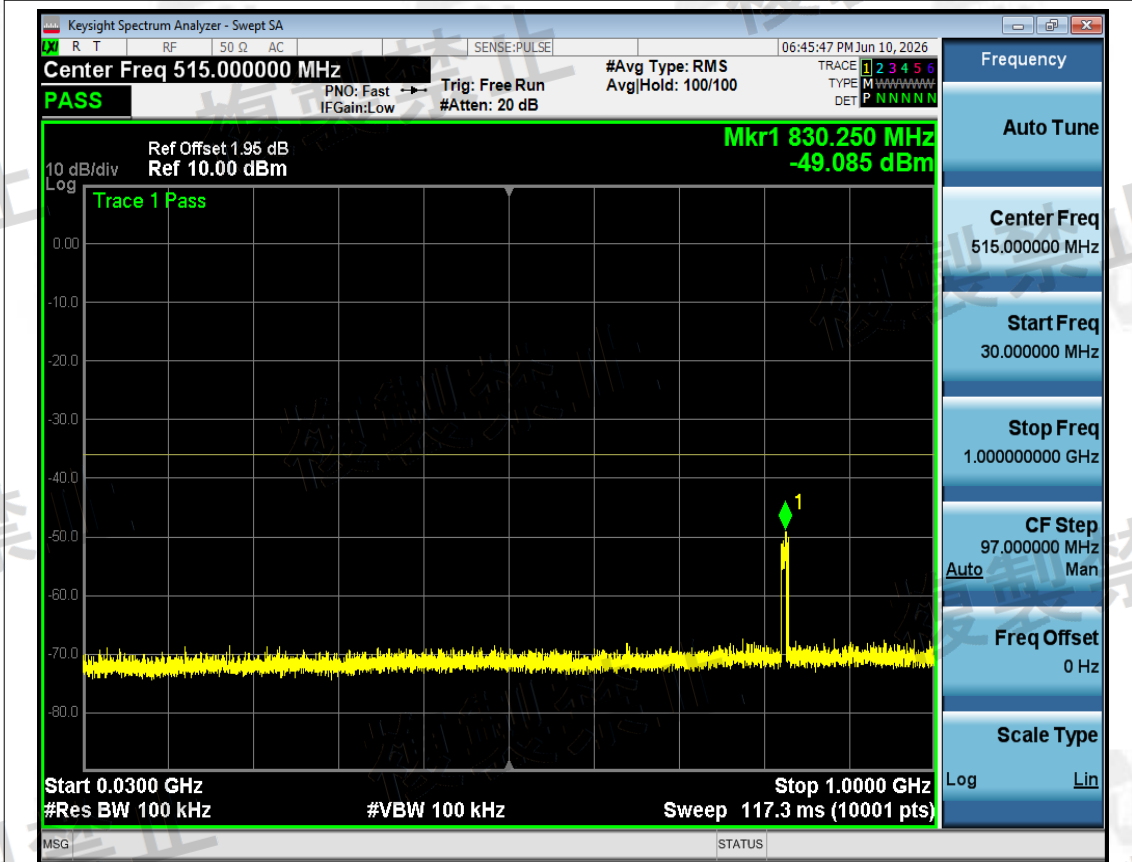


Tx. Spurious NVNT n40 2462MHz Ant1 @ 30MHz-1000MHz

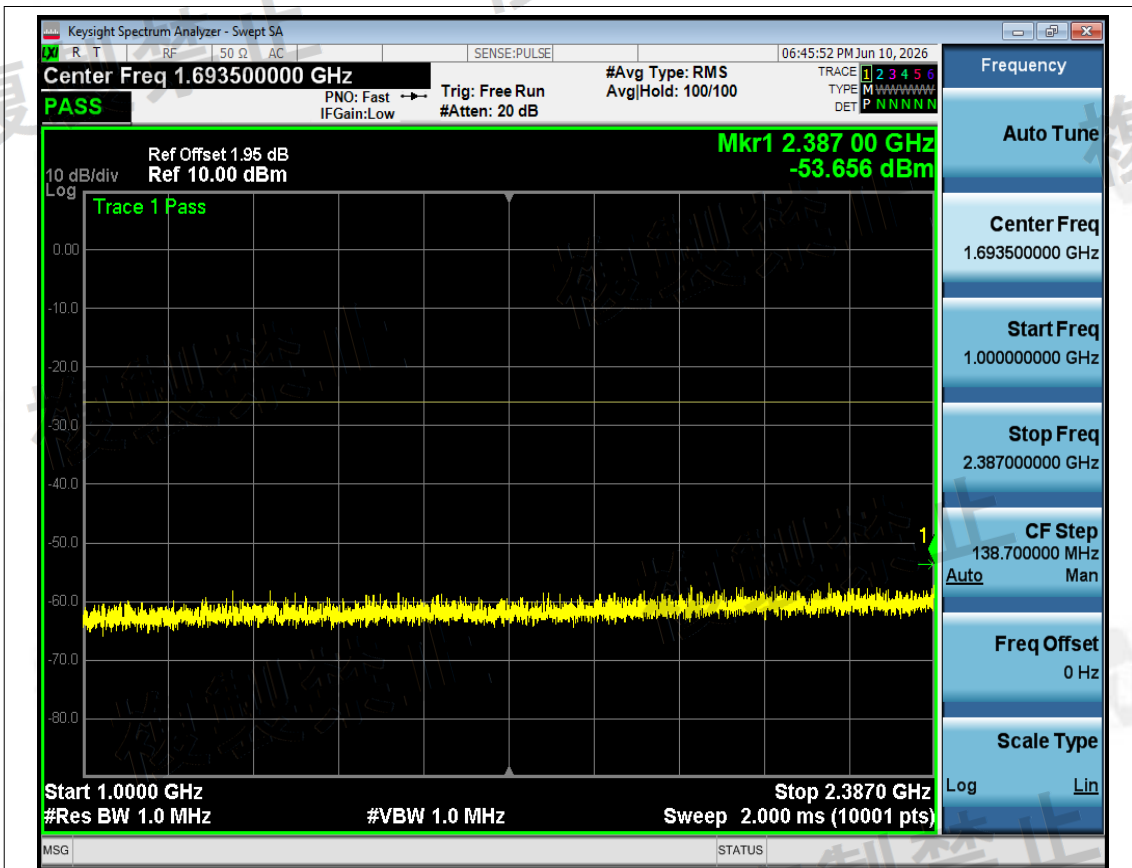


Tx. Spurious NVNT n40 2462MHz Ant1 @ 1000MHz-2387MHz

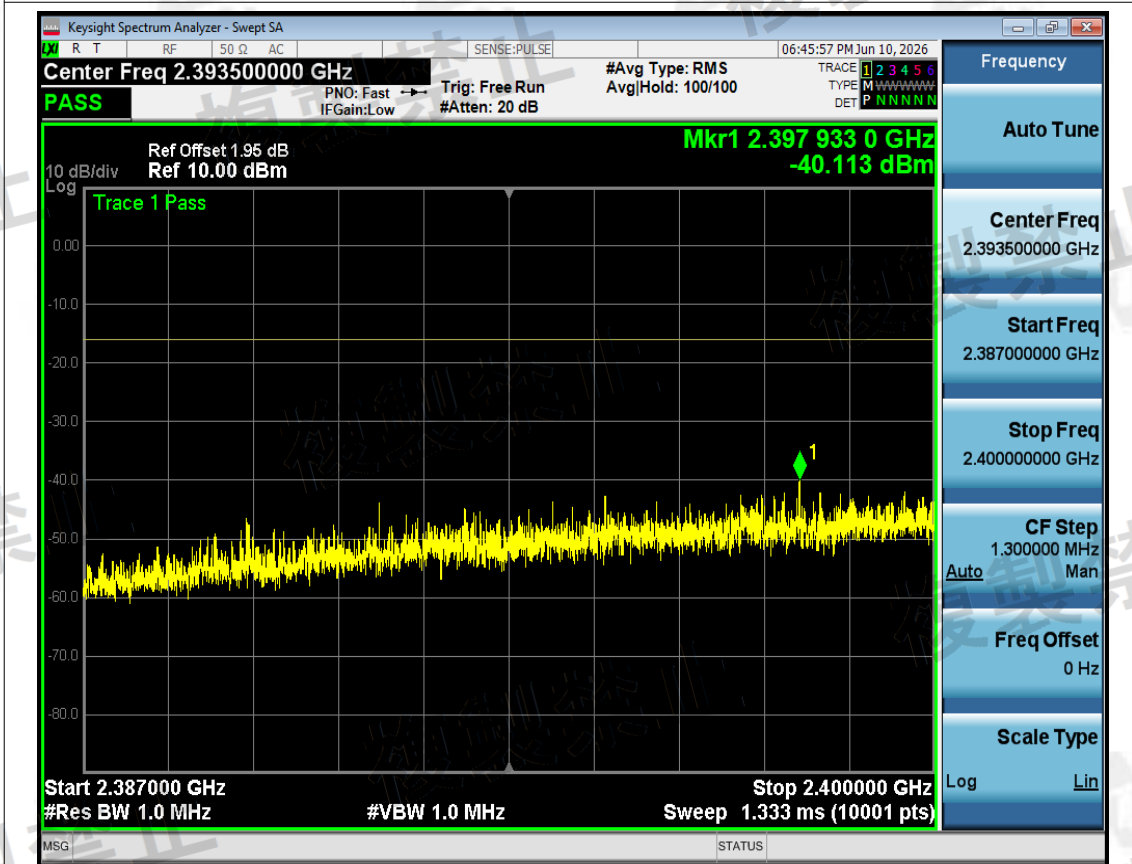


Tx. Spurious NVNT n40 2462MHz Ant1 @ 2387MHz-2400MHz

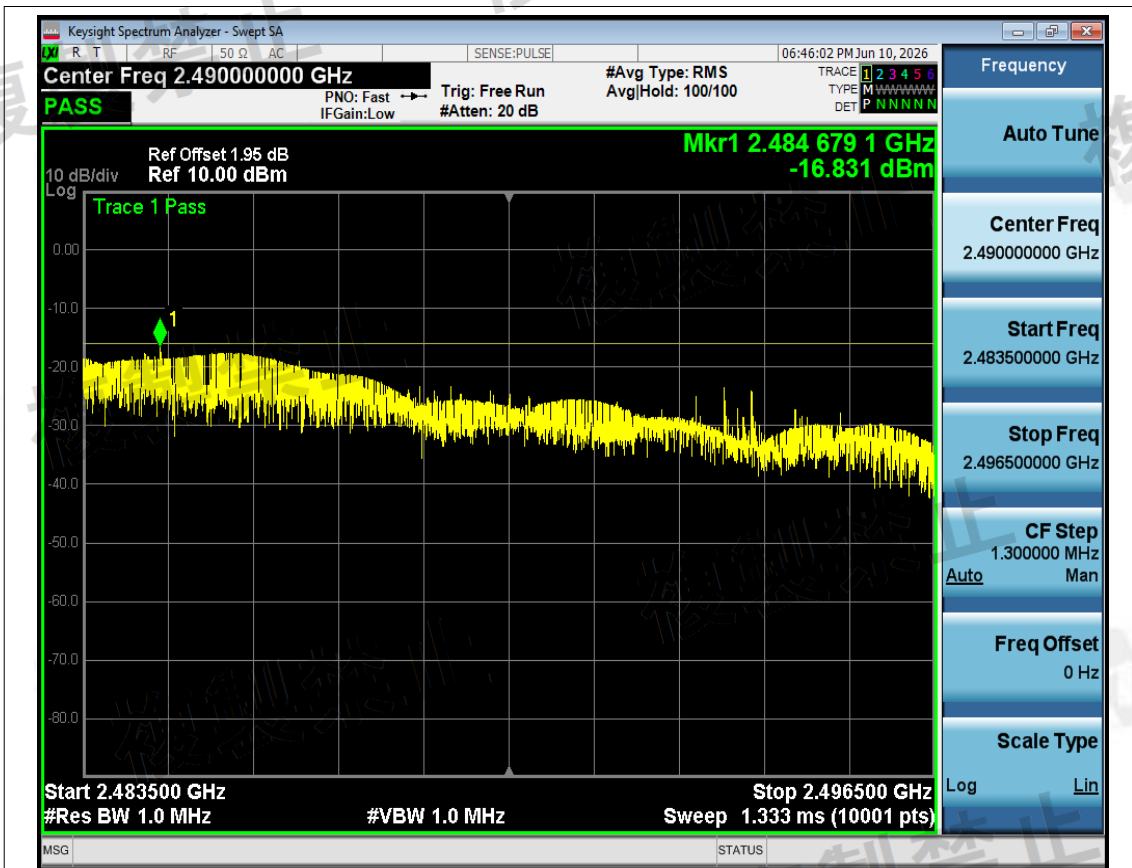

Tx. Spurious NVNT n40 2462MHz Ant1 @ 2483.5MHz-2496.5MHz

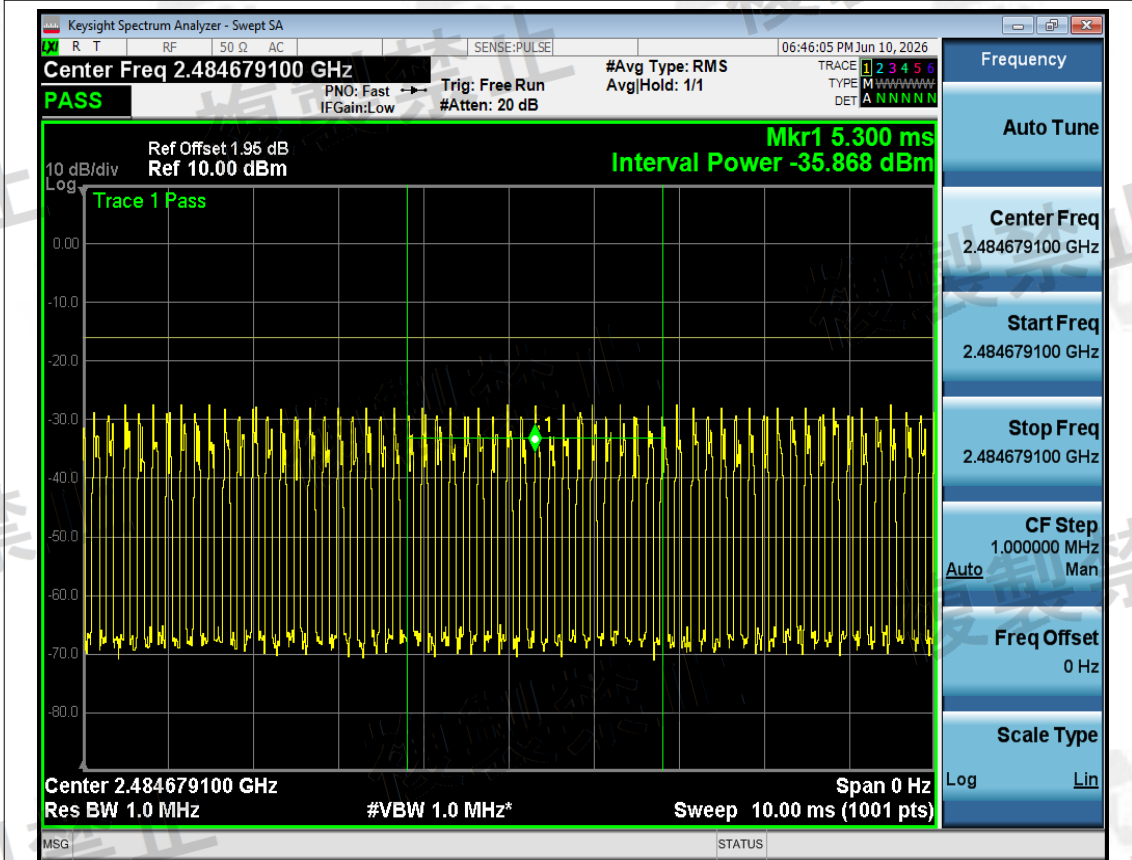

Tx. Spurious NVNT n40 2462MHz Ant1 @ 2483.5MHz-2496.5MHz Final

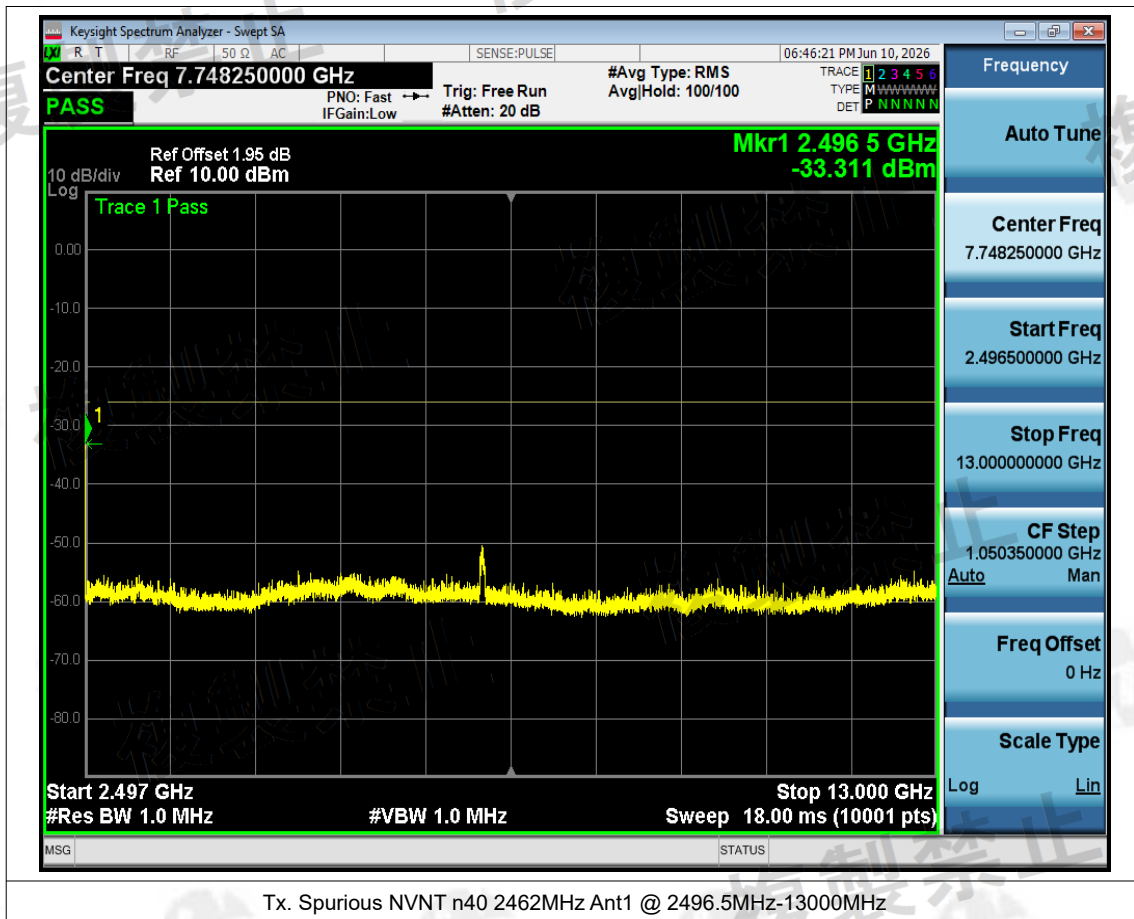




Rx Spurious Emission


Condi tion	Mod e	Frequen cy (MHz)	Anten na	Range (MHz)	Emissio n Frequen cy (MHz)	Max Peak Valu e (dB m)	Max RMS Valu e (dB m)	Max Peak Valu e (nW)	Max RM S Valu e (nW)	Lim it (nW)	Verdi ct
NVNT	b	2412	Ant1	30-1000	892.43	-77.4 0	NA	0.018 2	NA	4	Pass
NVNT	b	2412	Ant1	1000-130 00	5873.20	-65.1 7	NA	0.304 1	NA	20	Pass
NVNT	b	2442	Ant1	30-1000	818.32	-77.1 9	NA	0.019 1	NA	4	Pass
NVNT	b	2442	Ant1	1000-130 00	5624.80	-64.3 6	NA	0.366 4	NA	20	Pass
NVNT	b	2472	Ant1	30-1000	346.71	-77.7 9	NA	0.016 6	NA	4	Pass
NVNT	b	2472	Ant1	1000-130 00	5791.60	-64.8 4	NA	0.328 1	NA	20	Pass
NVNT	g	2412	Ant1	30-1000	652.55	-77.3 3	NA	0.018 5	NA	4	Pass
NVNT	g	2412	Ant1	1000-130 00	6776.80	-65.0 4	NA	0.313 3	NA	20	Pass
NVNT	g	2442	Ant1	30-1000	848.00	-77.1 7	NA	0.019 2	NA	4	Pass
NVNT	g	2442	Ant1	1000-130 00	5692.00	-65.1 2	NA	0.307 6	NA	20	Pass
NVNT	g	2472	Ant1	30-1000	495.60	-76.7 0	NA	0.021 4	NA	4	Pass
NVNT	g	2472	Ant1	1000-130 00	6120.40	-65.3 0	NA	0.295 1	NA	20	Pass
NVNT	n20	2412	Ant1	30-1000	781.07	-77.1 3	NA	0.019 4	NA	4	Pass
NVNT	n20	2412	Ant1	1000-130 00	5386.00	-64.4 7	NA	0.357 3	NA	20	Pass
NVNT	n20	2442	Ant1	30-1000	920.65	-77.2 3	NA	0.018 9	NA	4	Pass
NVNT	n20	2442	Ant1	1000-130 00	5741.20	-64.5 7	NA	0.349 1	NA	20	Pass
NVNT	n20	2472	Ant1	30-1000	933.26	-77.1 2	NA	0.019 4	NA	4	Pass
NVNT	n20	2472	Ant1	1000-130	5268.40	-65.2	NA	0.297	NA	20	Pass




				00		7		2			
NVNT	n40	2422	Ant1	30-1000	982.35	-77.0 2	NA	0.019 9	NA	4	Pass
NVNT	n40	2422	Ant1	1000-130 00	3007.60	-64.9 7	NA	0.318 4	NA	20	Pass
NVNT	n40	2442	Ant1	30-1000	762.45	-77.6 0	NA	0.017 4	NA	4	Pass
NVNT	n40	2442	Ant1	1000-130 00	5256.40	-64.1 3	NA	0.386 4	NA	20	Pass
NVNT	n40	2462	Ant1	30-1000	798.92	-77.2 9	NA	0.018 7	NA	4	Pass
NVNT	n40	2462	Ant1	1000-130 00	3138.40	-64.7 2	NA	0.337 3	NA	20	Pass

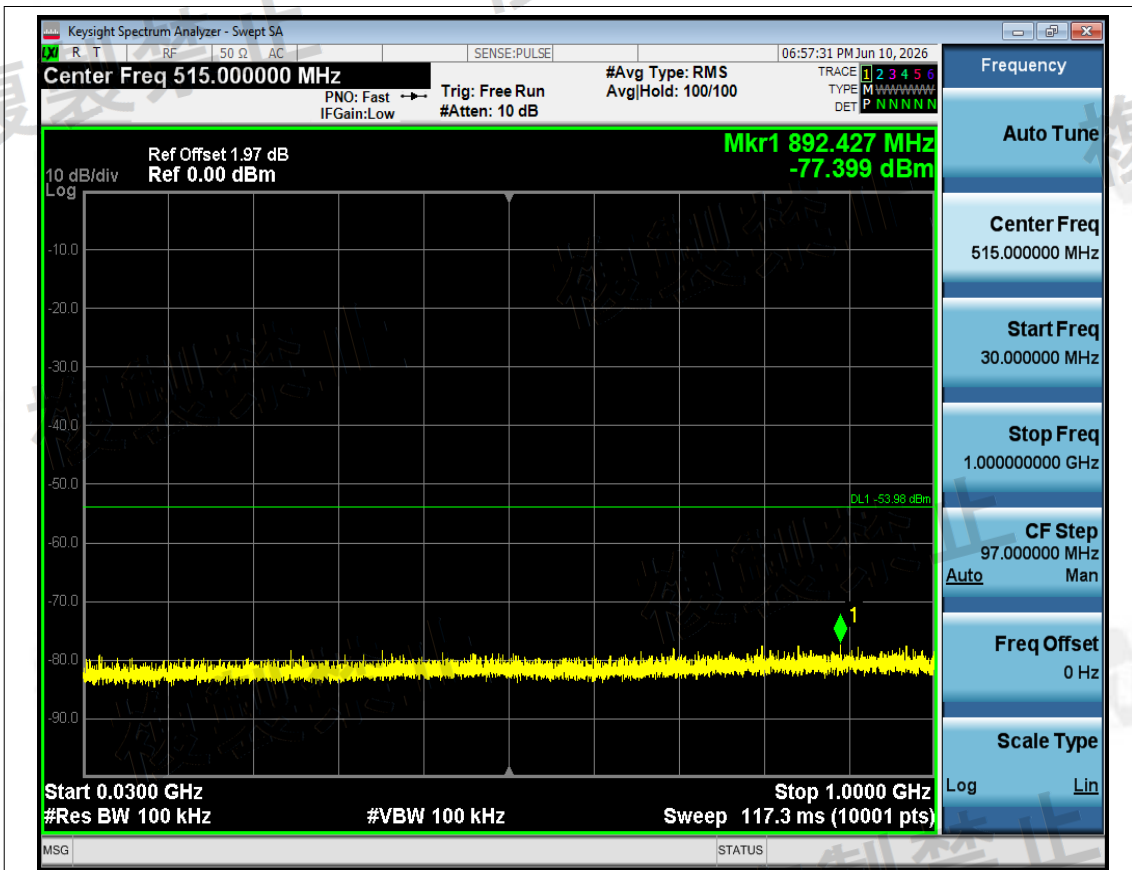


Rx. Spurious NVNT b 2412MHz Ant1 @ 30MHz-1000MHz

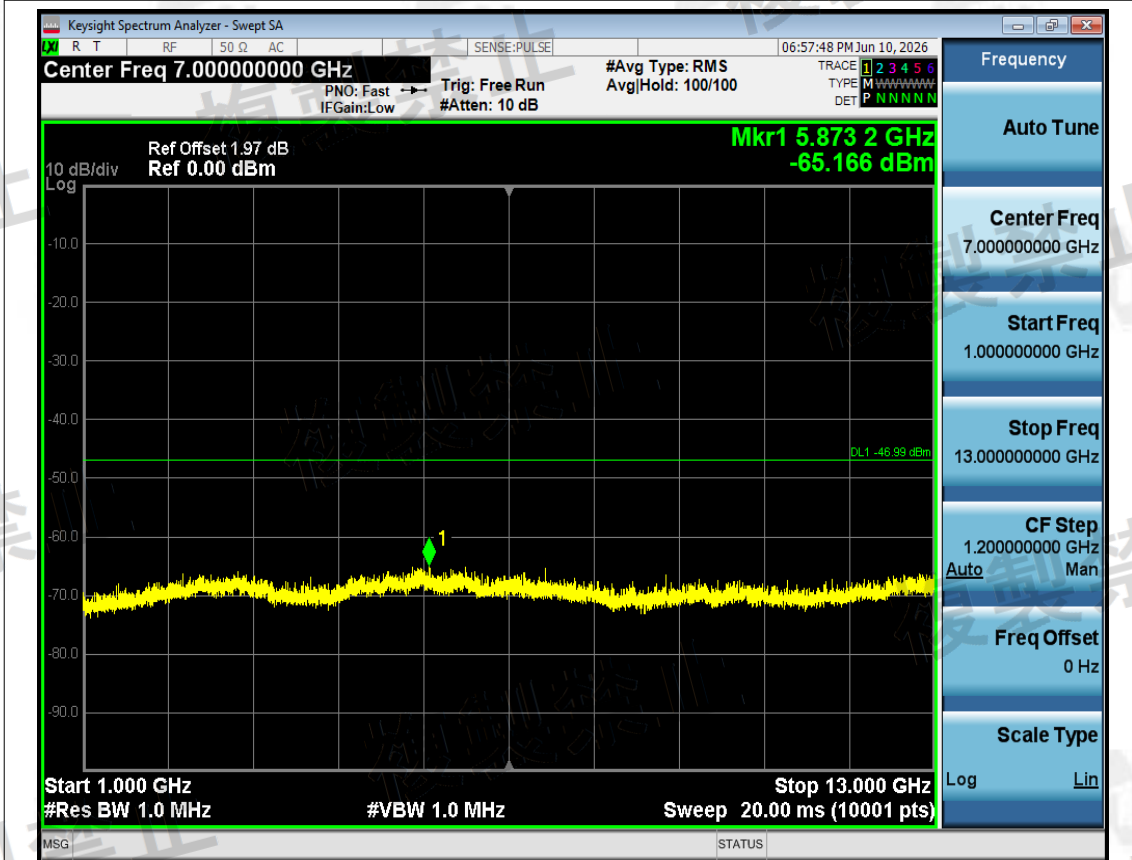


Rx. Spurious NVNT b 2412MHz Ant1 @ 1000MHz-13000MHz

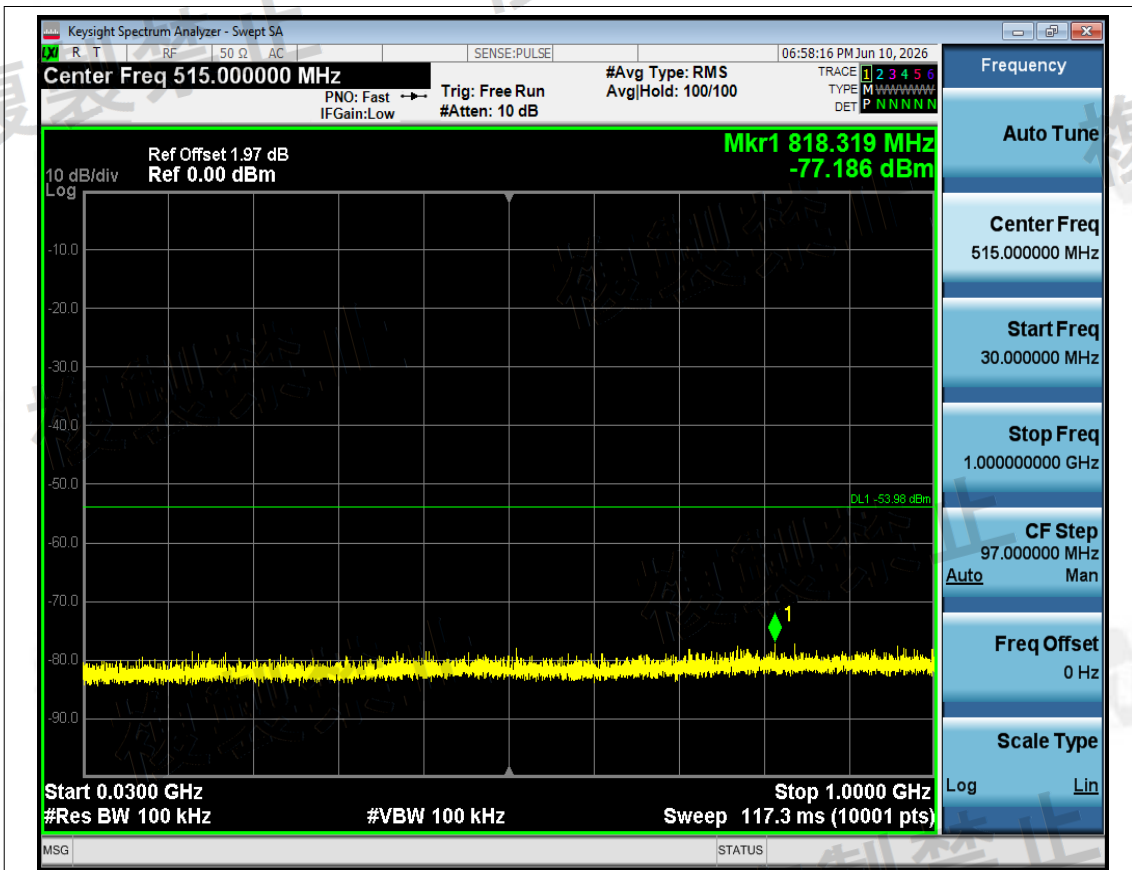


Rx. Spurious NVNT b 2442MHz Ant1 @ 30MHz-1000MHz

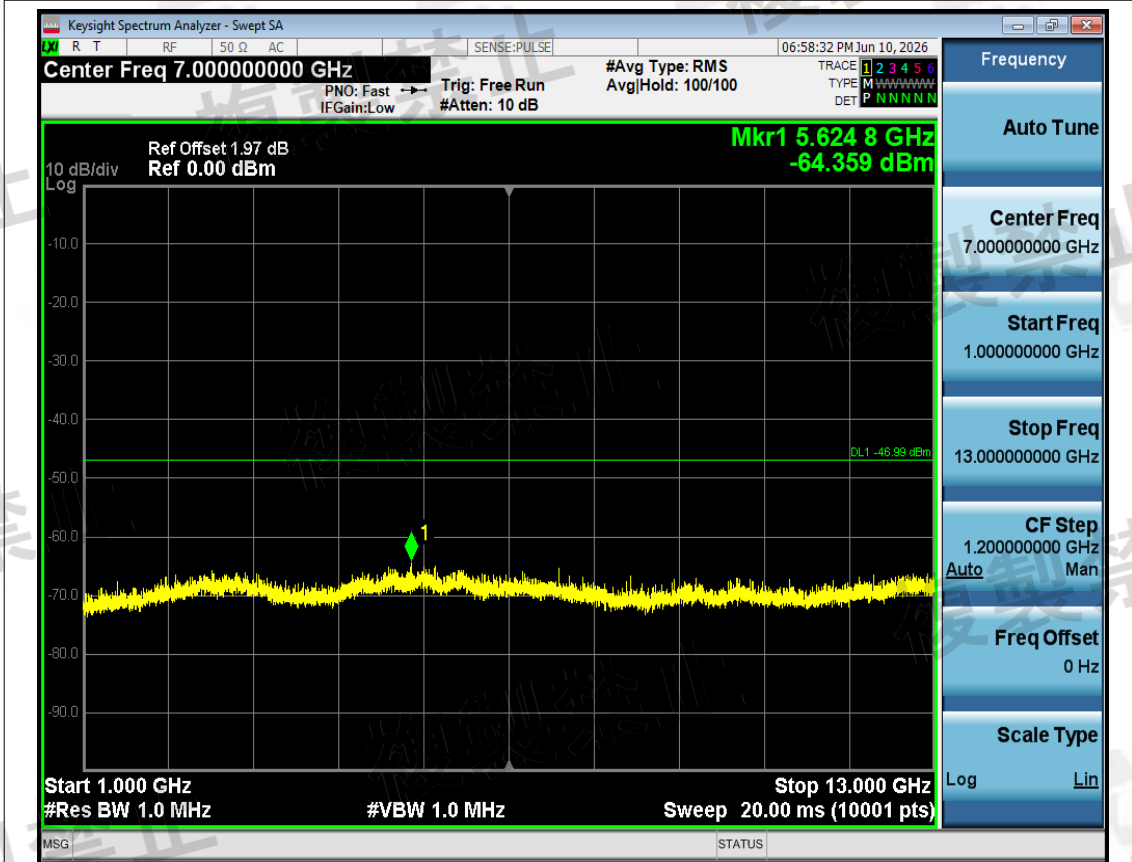


Rx. Spurious NVNT b 2442MHz Ant1 @ 1000MHz-13000MHz

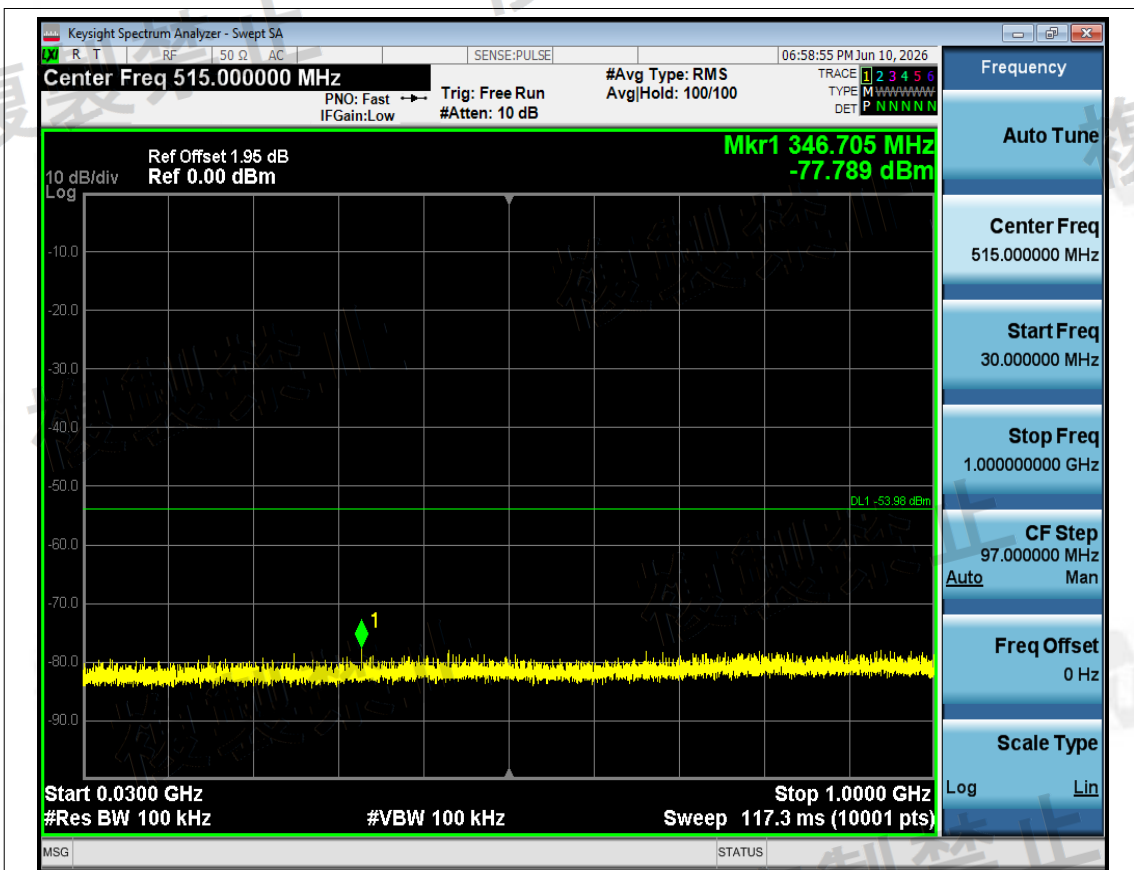


Rx. Spurious NVNT b 2472MHz Ant1 @ 30MHz-1000MHz

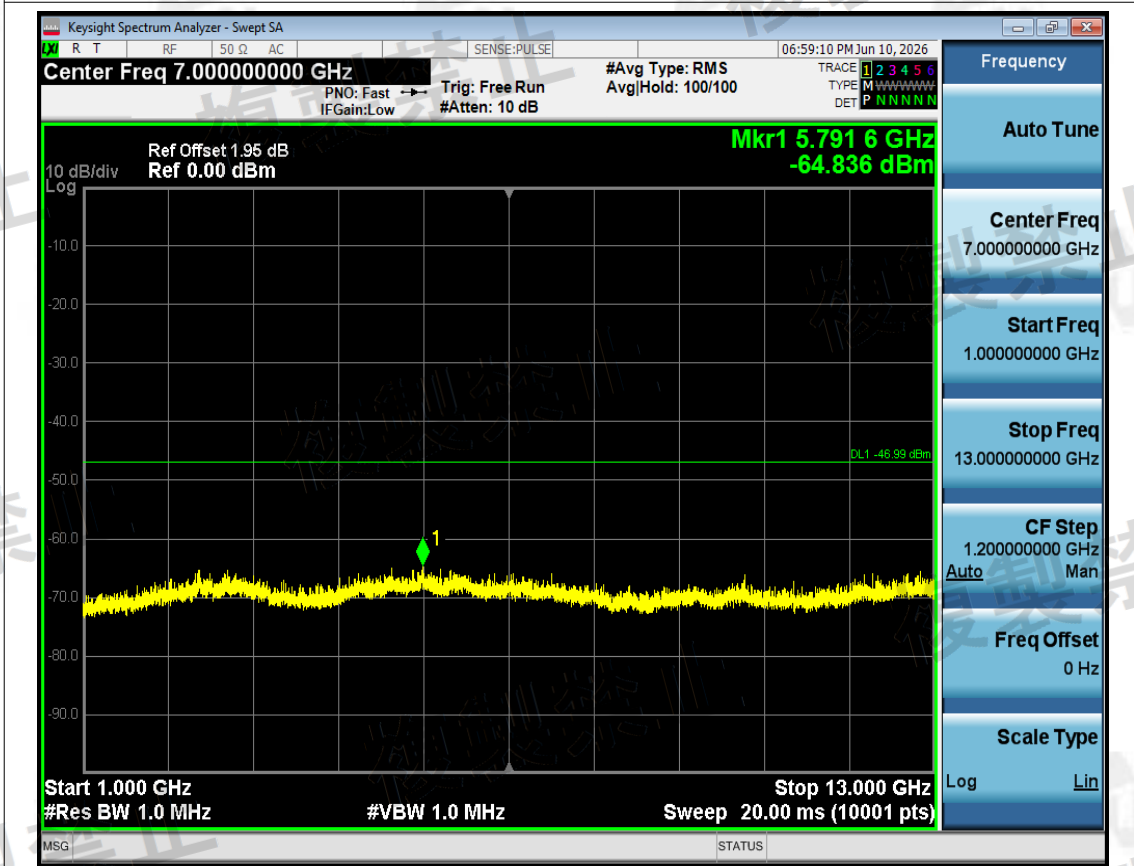


Rx. Spurious NVNT b 2472MHz Ant1 @ 1000MHz-13000MHz

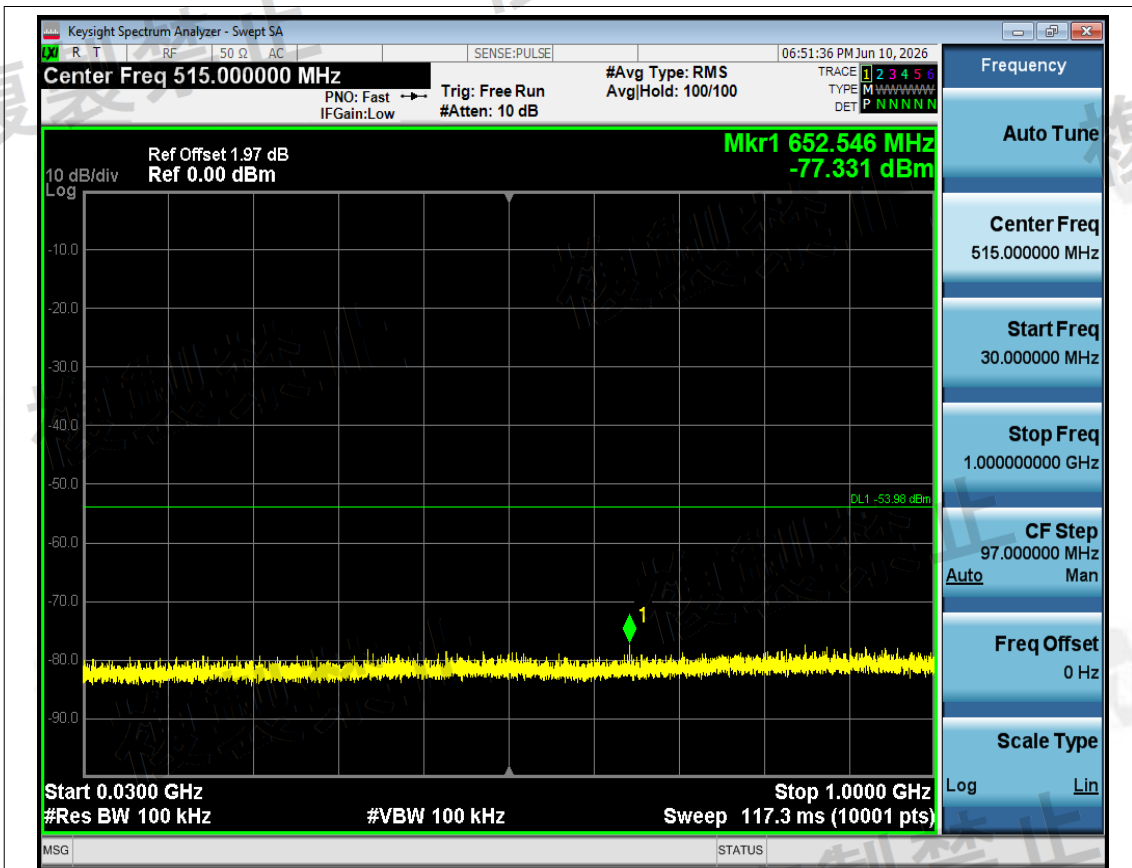


Rx. Spurious NVNT g 2412MHz Ant1 @ 30MHz-1000MHz

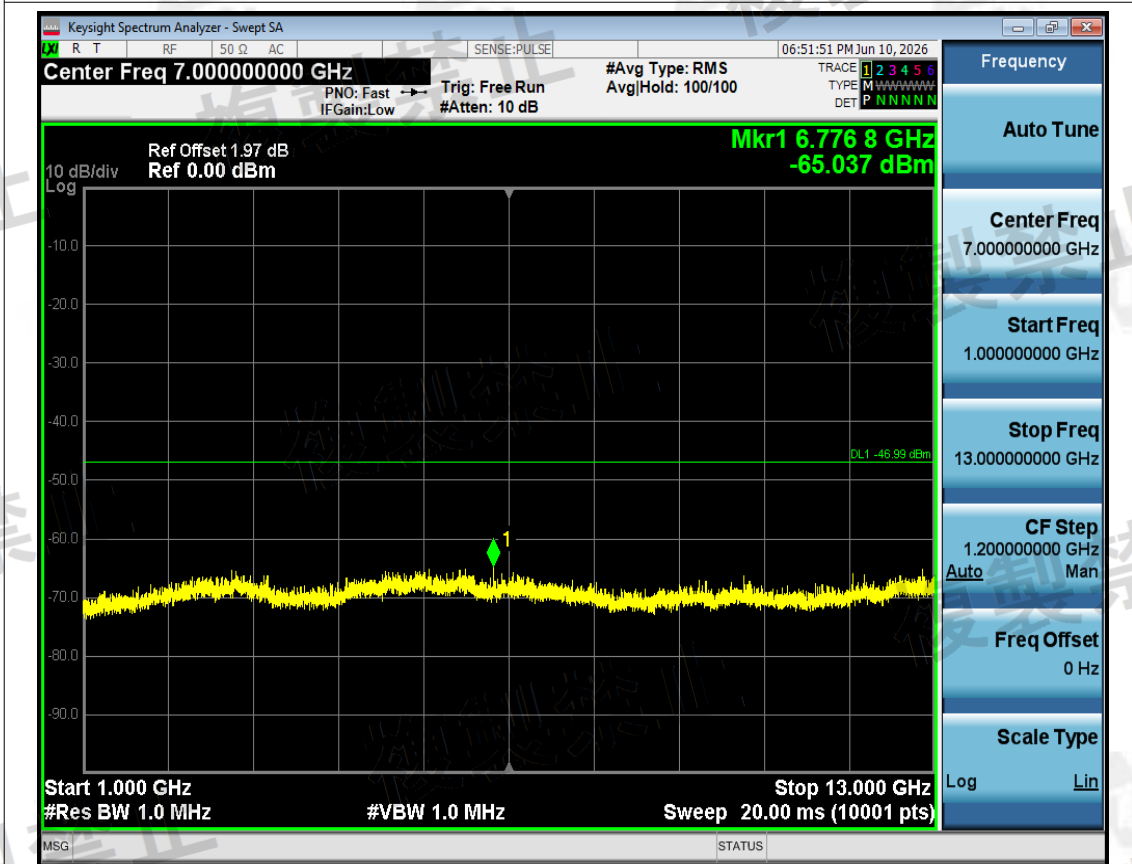


Rx. Spurious NVNT g 2412MHz Ant1 @ 1000MHz-13000MHz

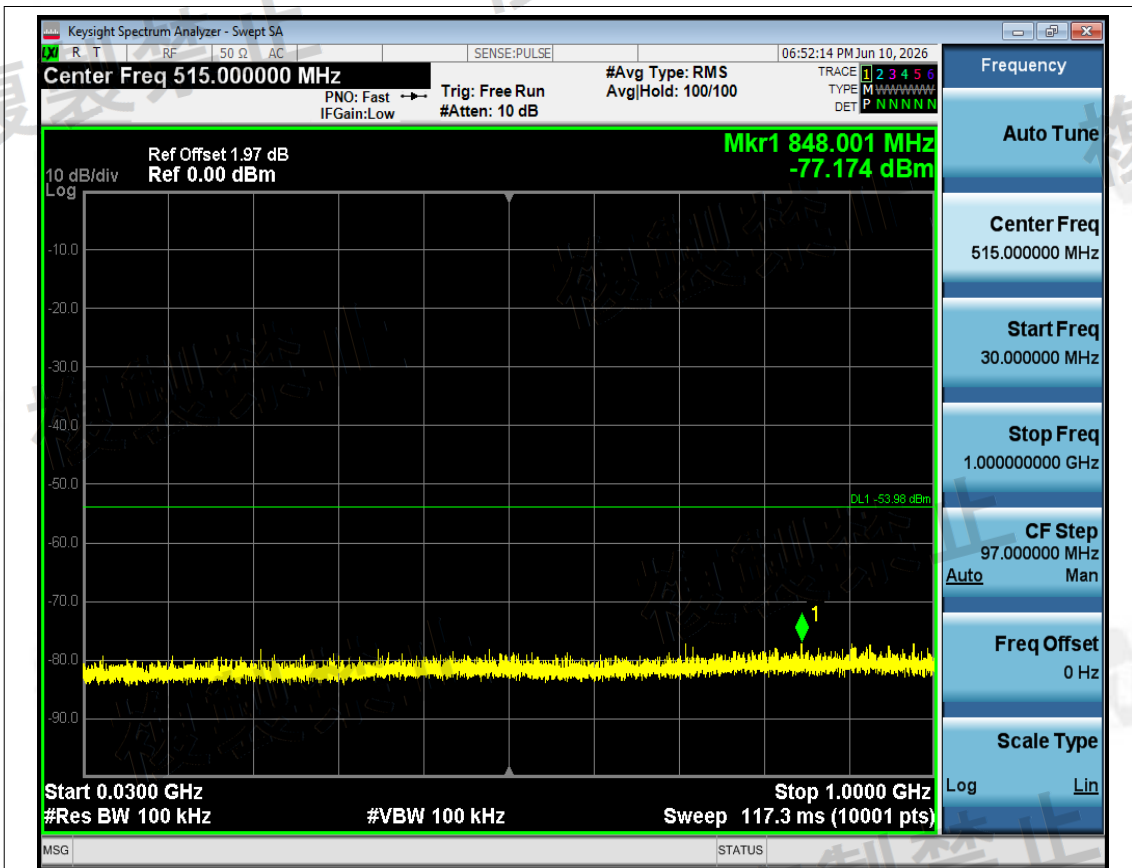


Rx. Spurious NVNT g 2442MHz Ant1 @ 30MHz-1000MHz

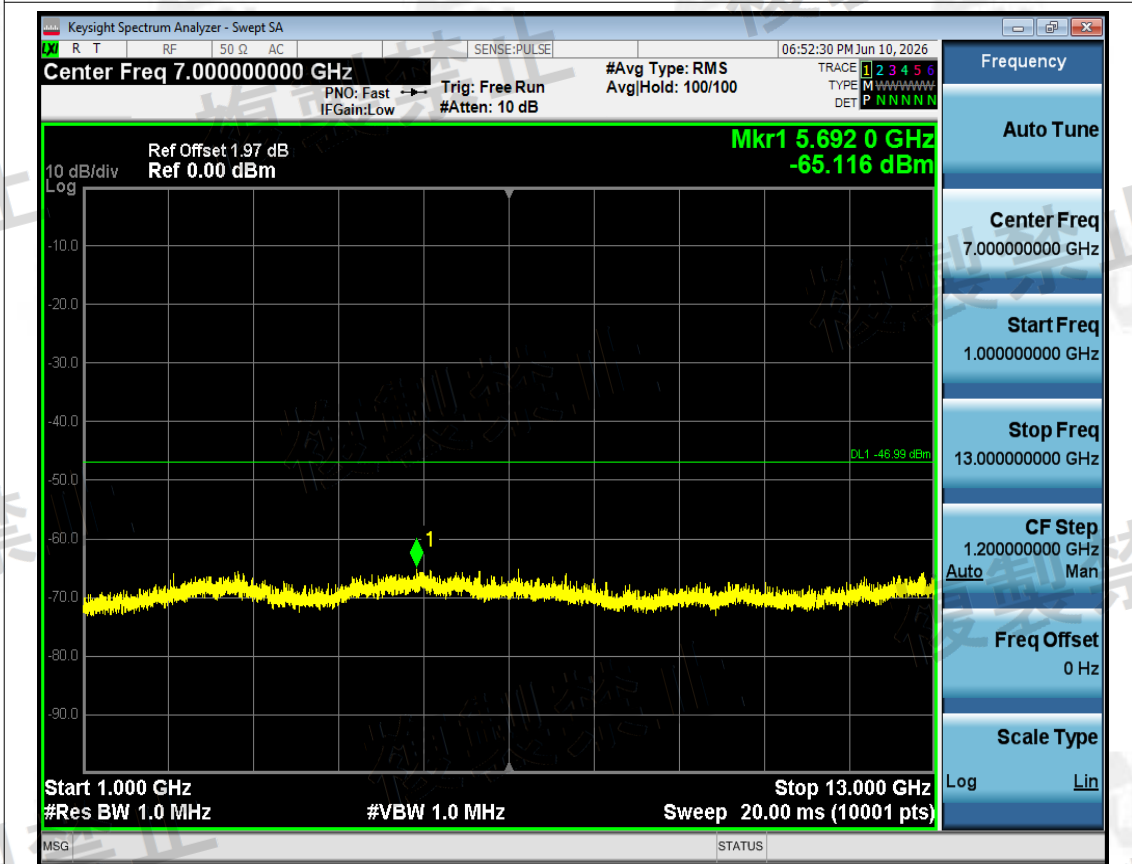


Rx. Spurious NVNT g 2442MHz Ant1 @ 1000MHz-13000MHz

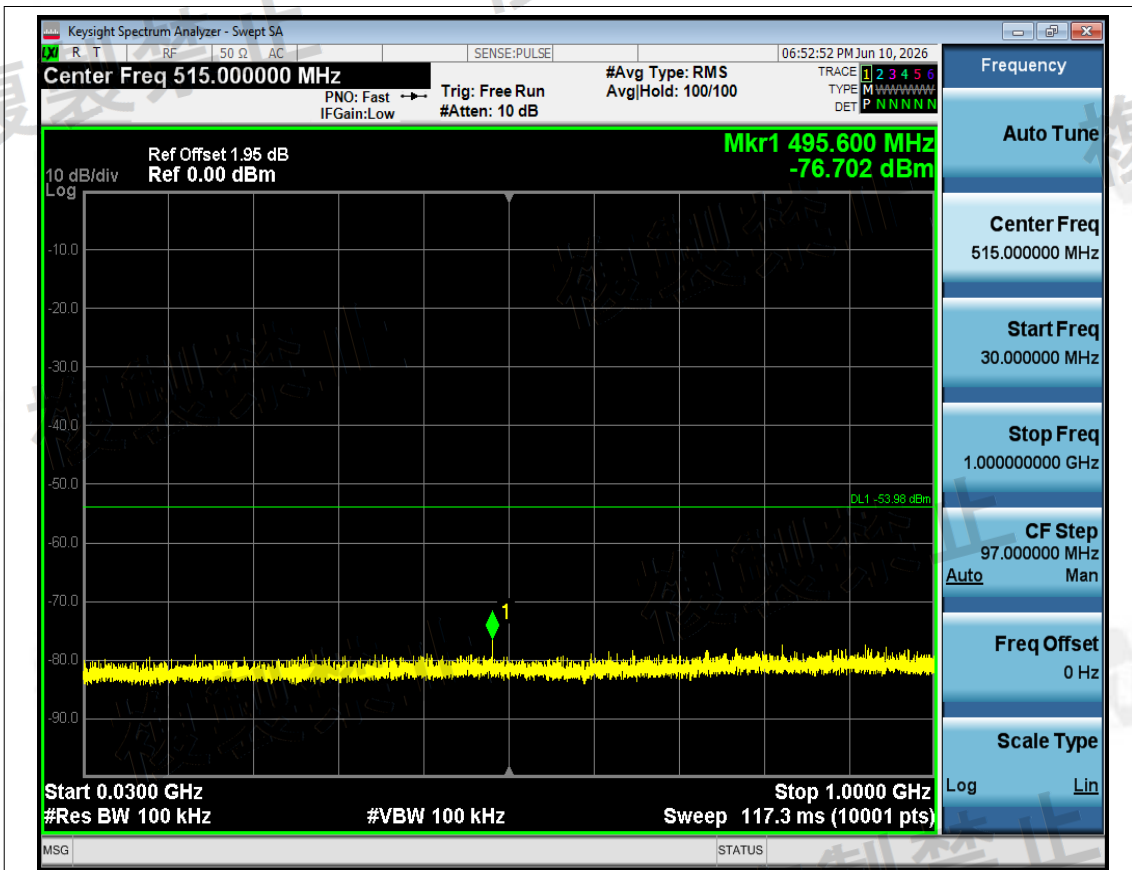


Rx. Spurious NVNT g 2472MHz Ant1 @ 30MHz-1000MHz

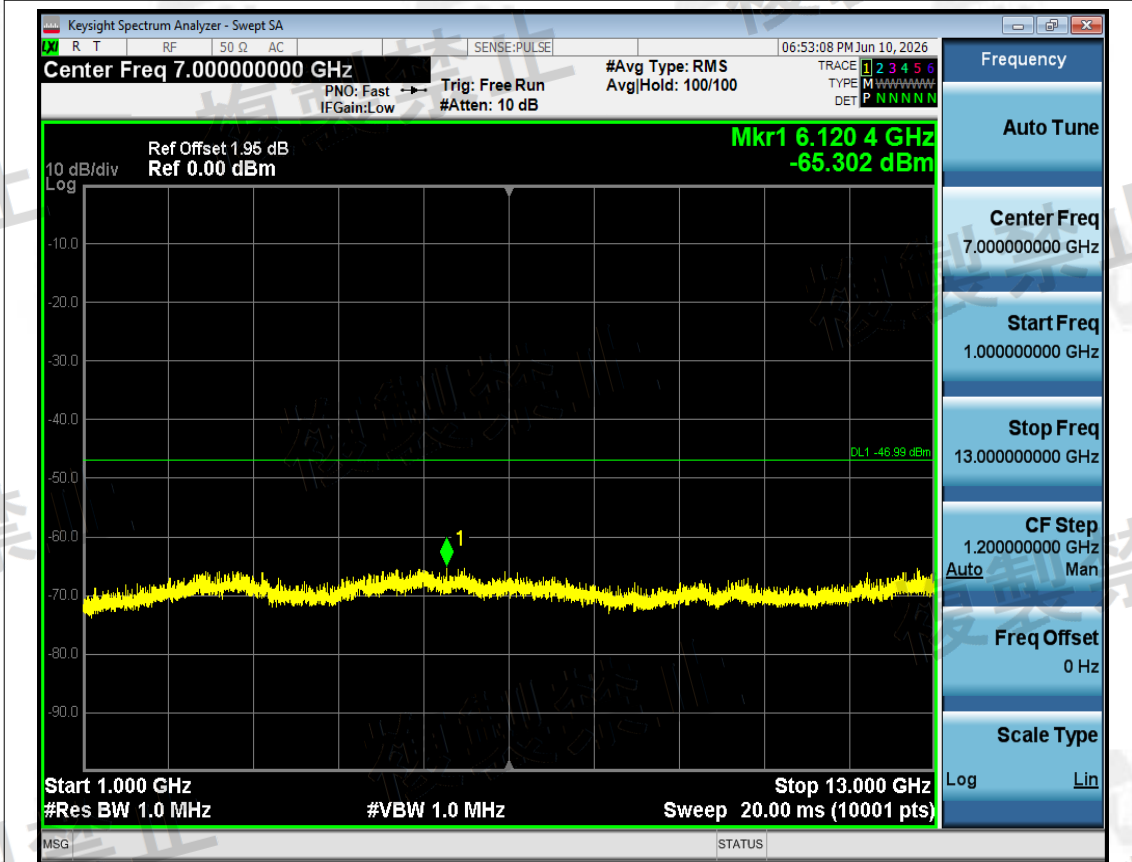


Rx. Spurious NVNT g 2472MHz Ant1 @ 1000MHz-13000MHz

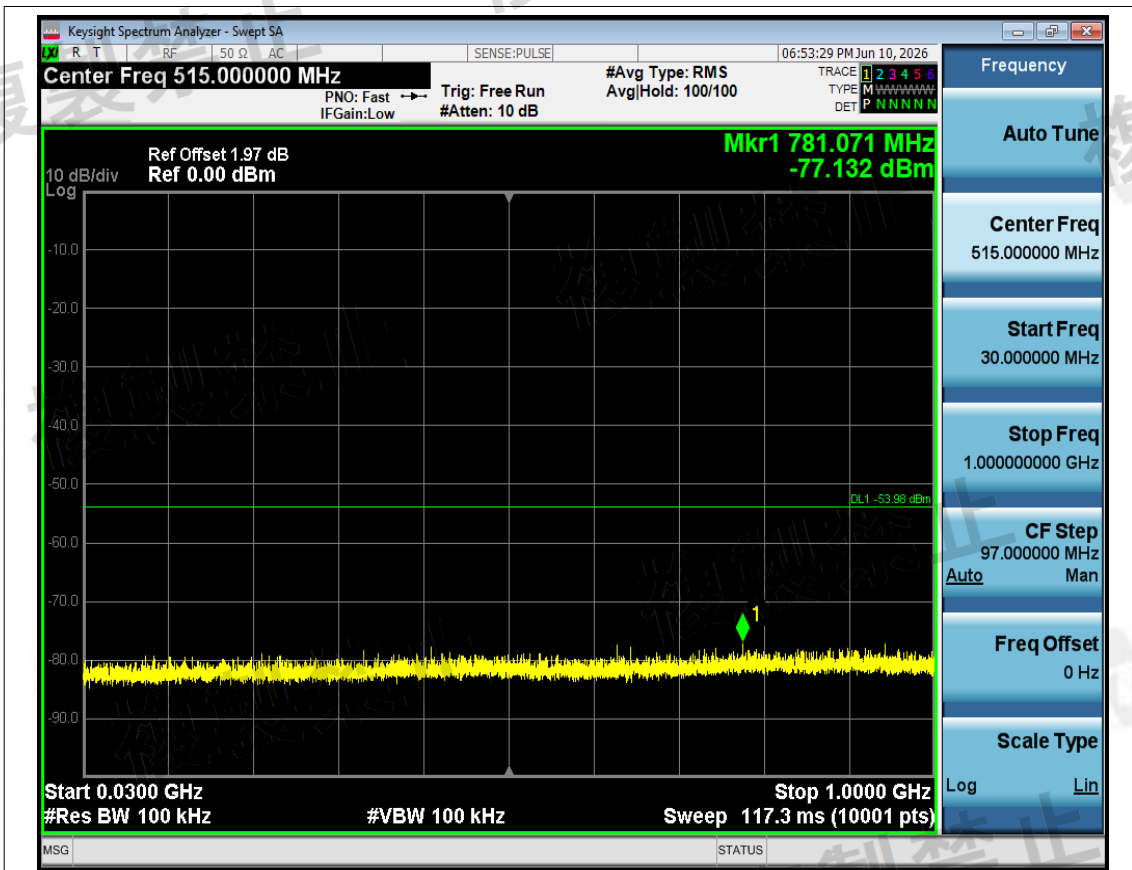


Rx. Spurious NVNT n20 2412MHz Ant1 @ 30MHz-1000MHz

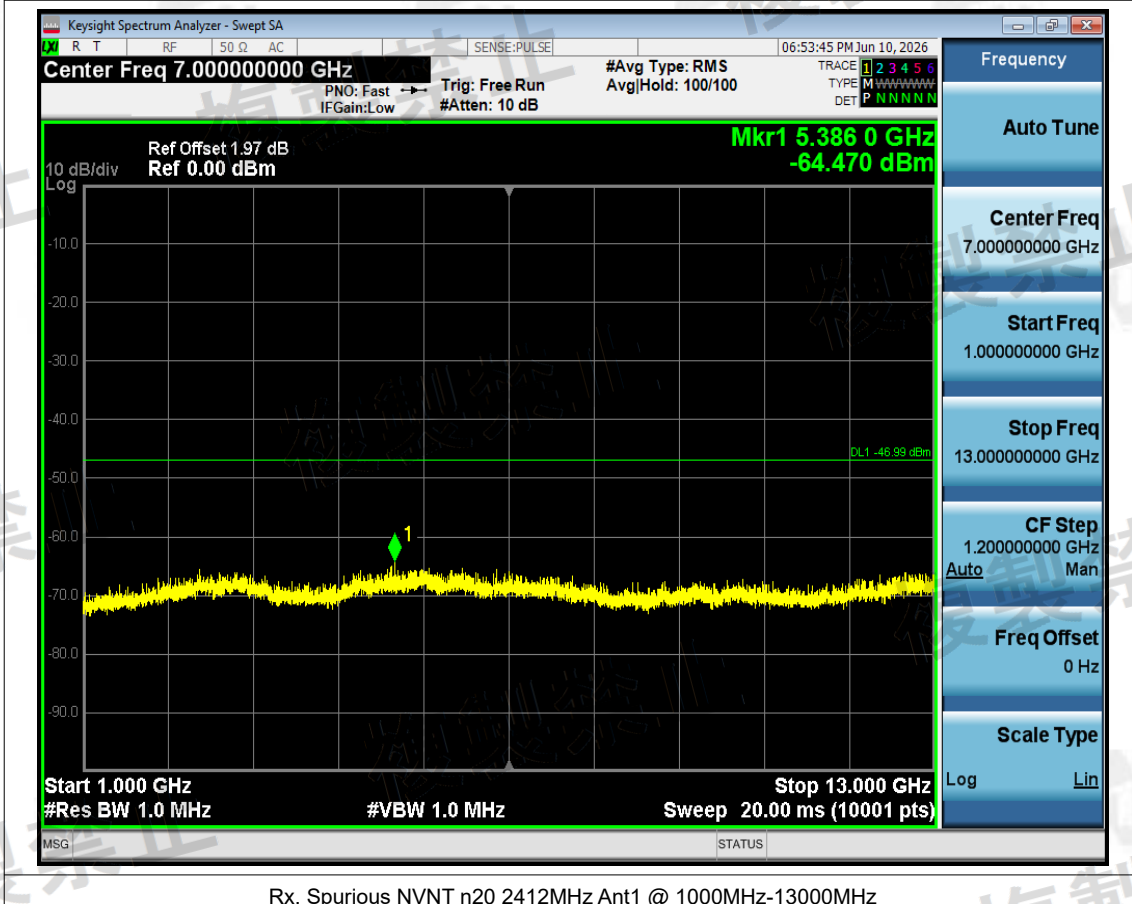


Rx. Spurious NVNT n20 2412MHz Ant1 @ 1000MHz-13000MHz

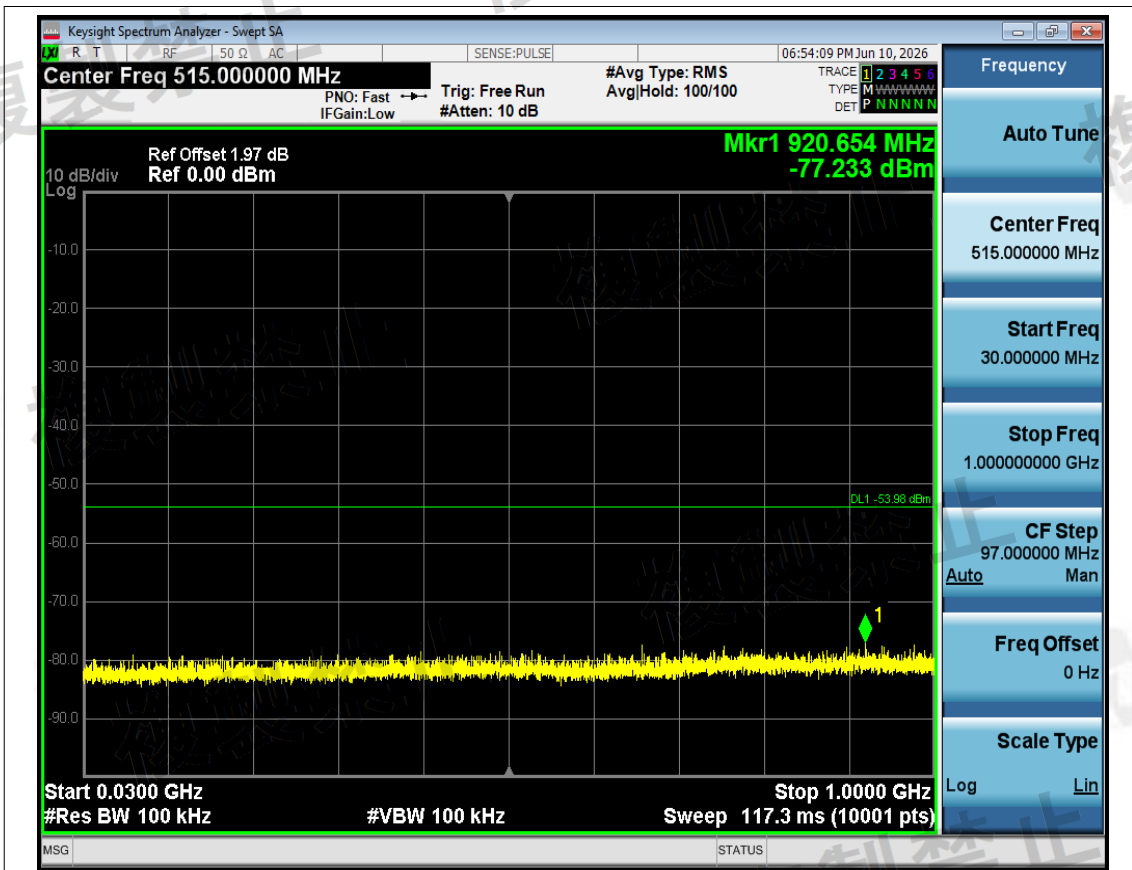


Rx. Spurious NVNT n20 2442MHz Ant1 @ 30MHz-1000MHz

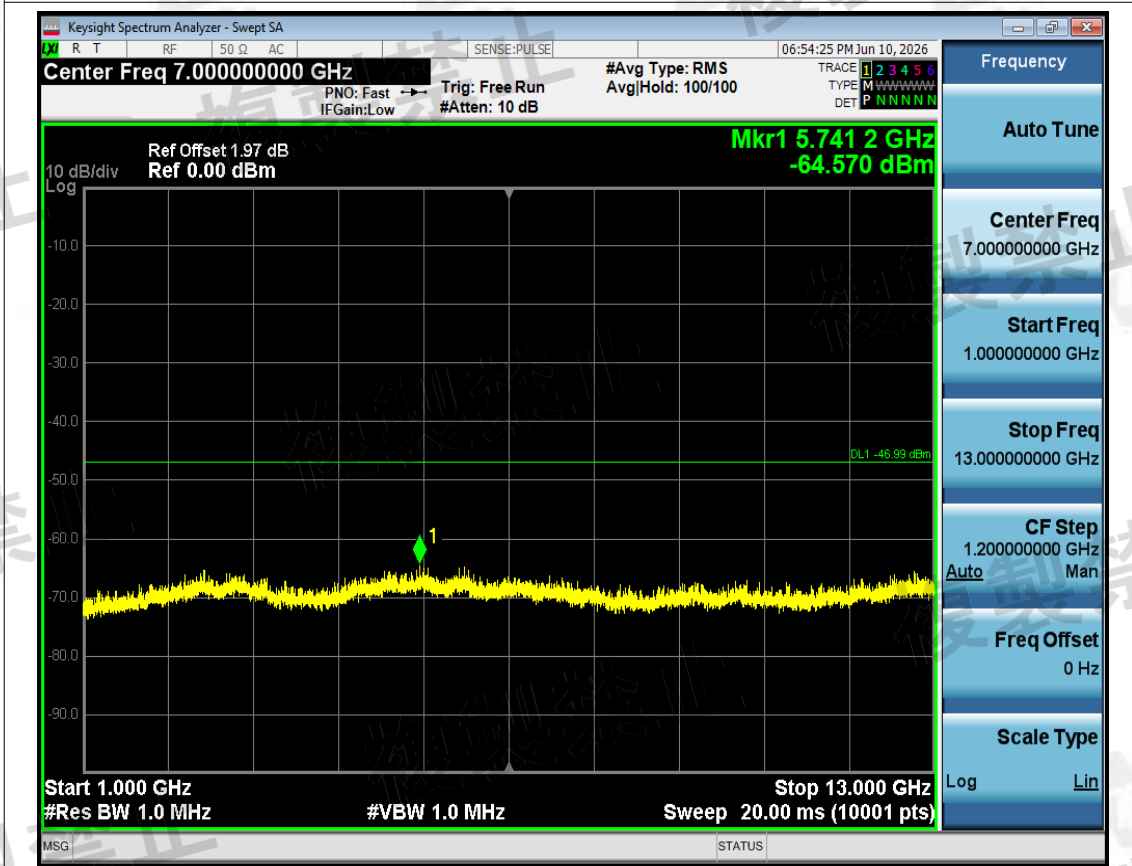


Rx. Spurious NVNT n20 2442MHz Ant1 @ 1000MHz-13000MHz

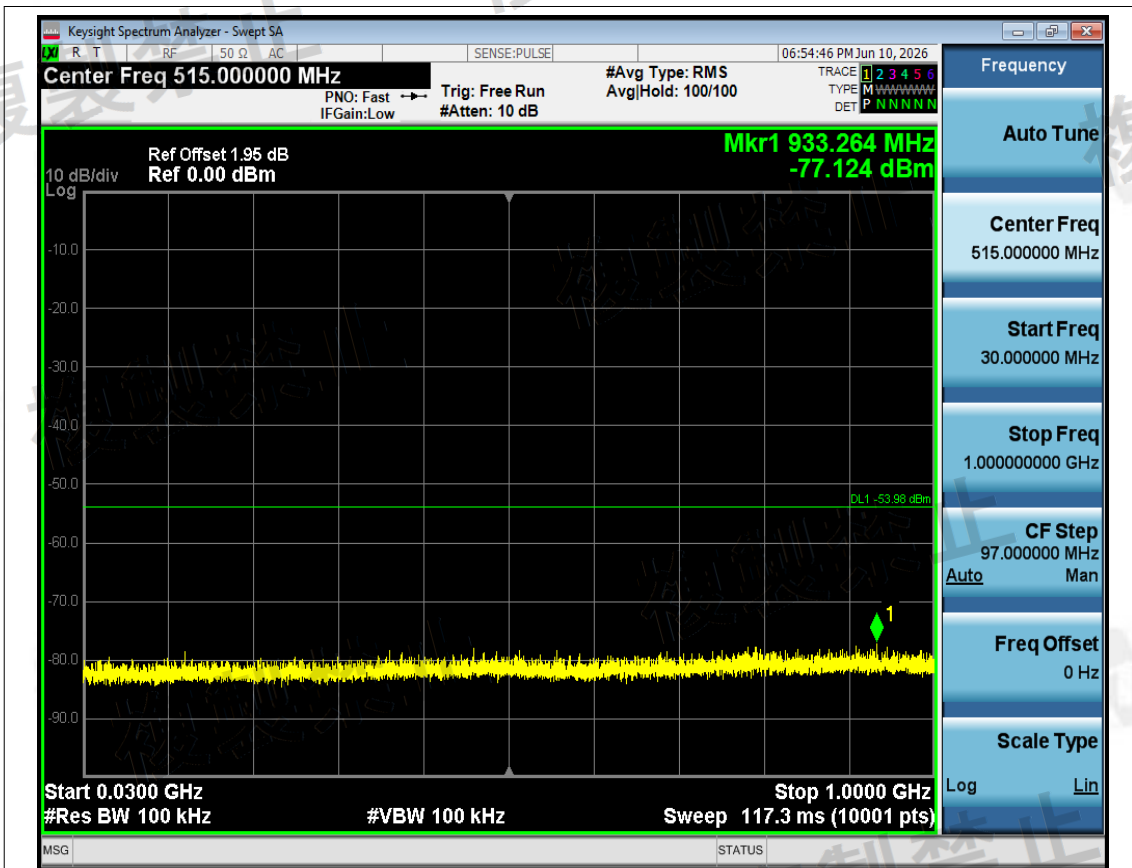


Rx. Spurious NVNT n20 2472MHz Ant1 @ 30MHz-1000MHz

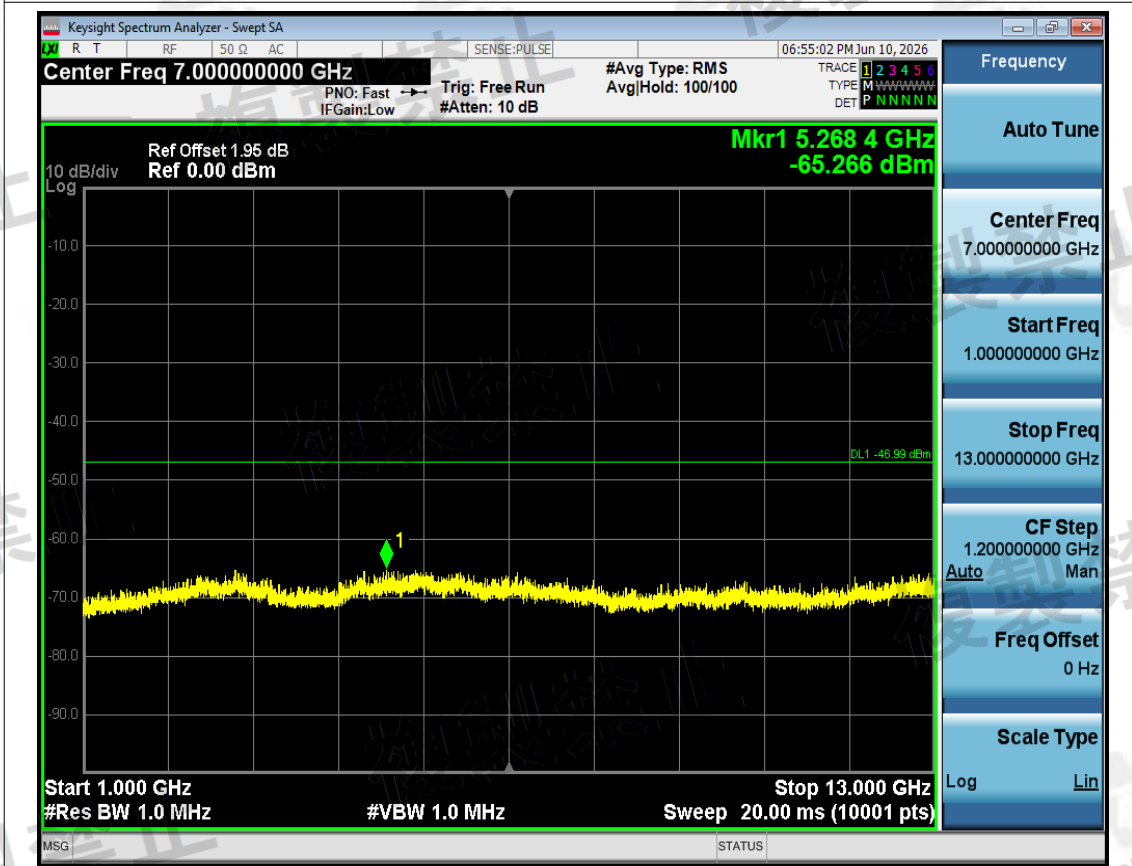


Rx. Spurious NVNT n20 2472MHz Ant1 @ 1000MHz-13000MHz

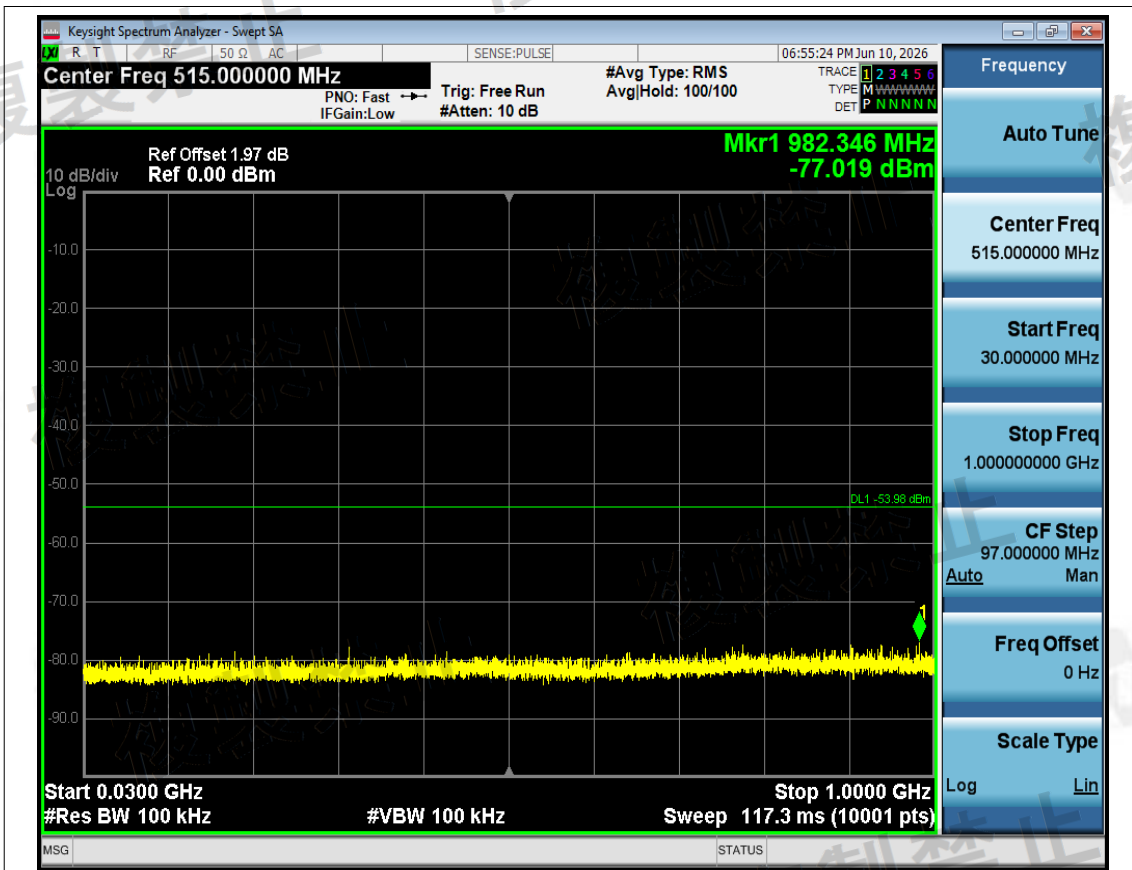


Rx. Spurious NVNT n40 2422MHz Ant1 @ 30MHz-1000MHz

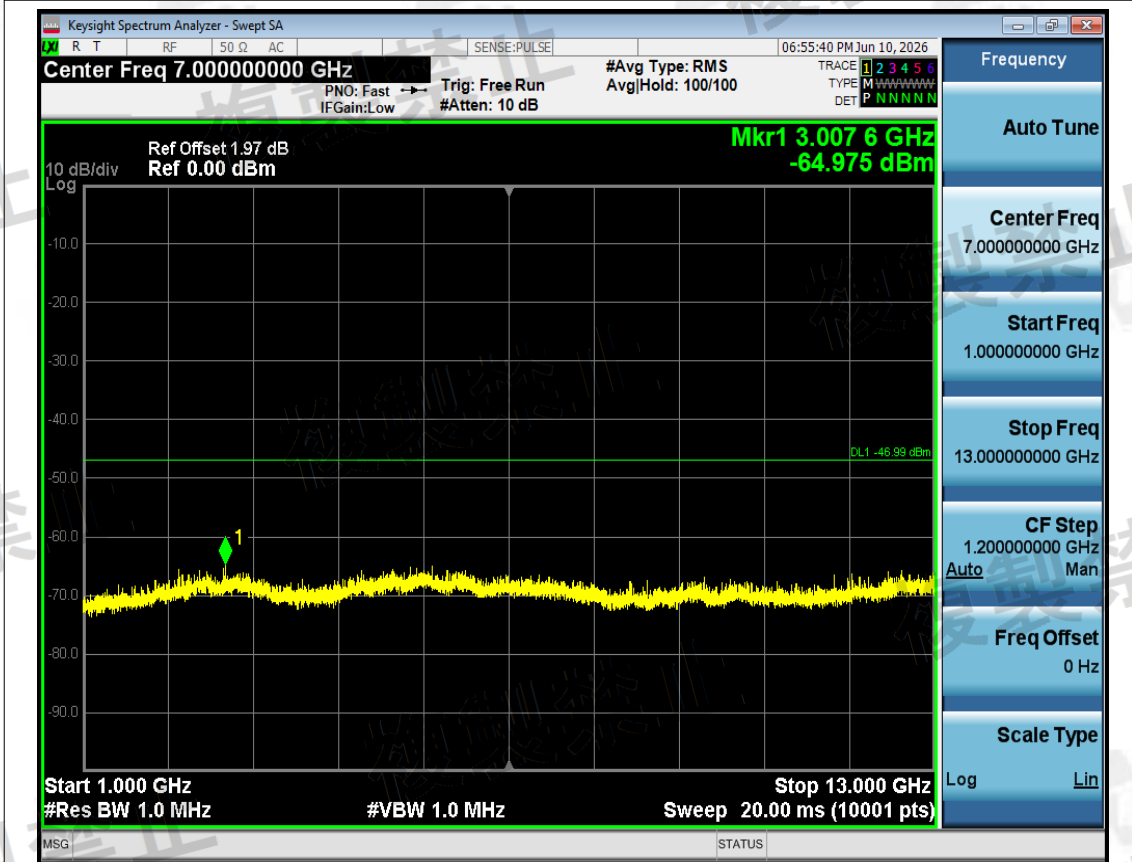


Rx. Spurious NVNT n40 2422MHz Ant1 @ 1000MHz-13000MHz

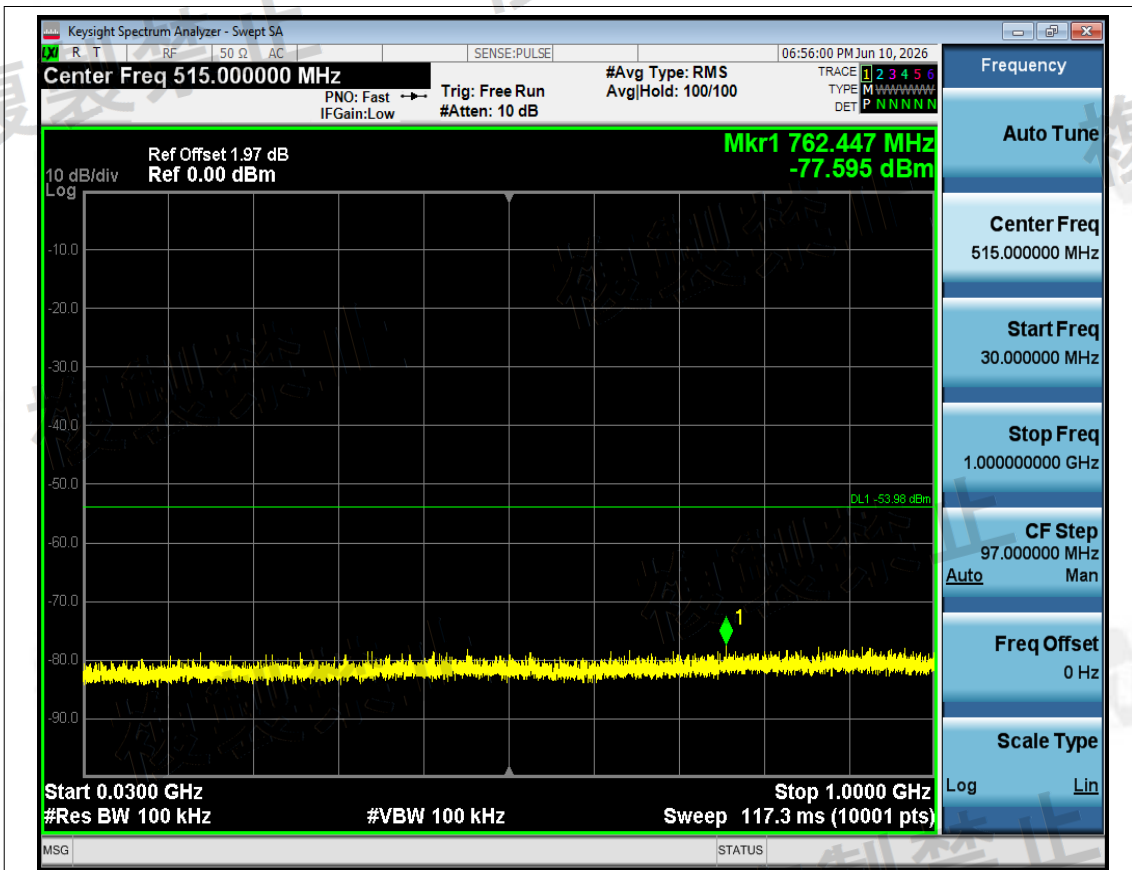


Rx. Spurious NVNT n40 2442MHz Ant1 @ 30MHz-1000MHz

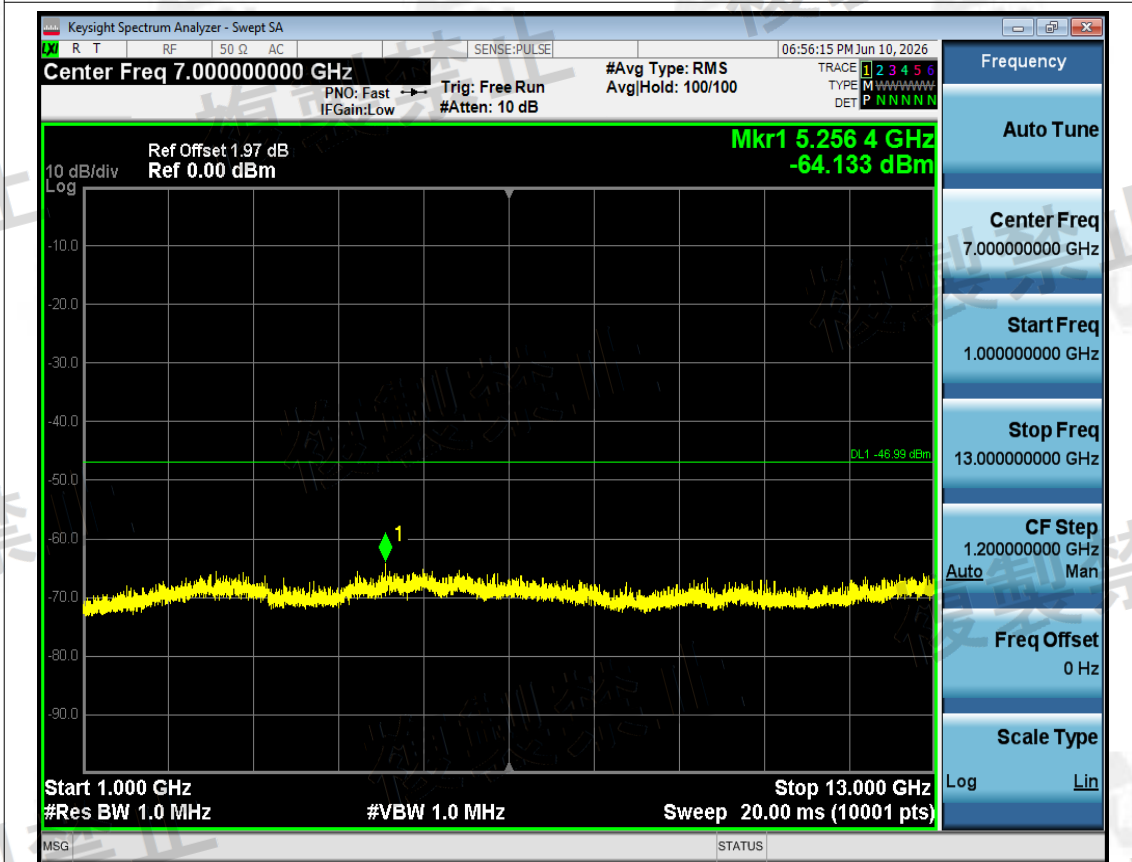

Rx. Spurious NVNT n40 2442MHz Ant1 @ 1000MHz-13000MHz

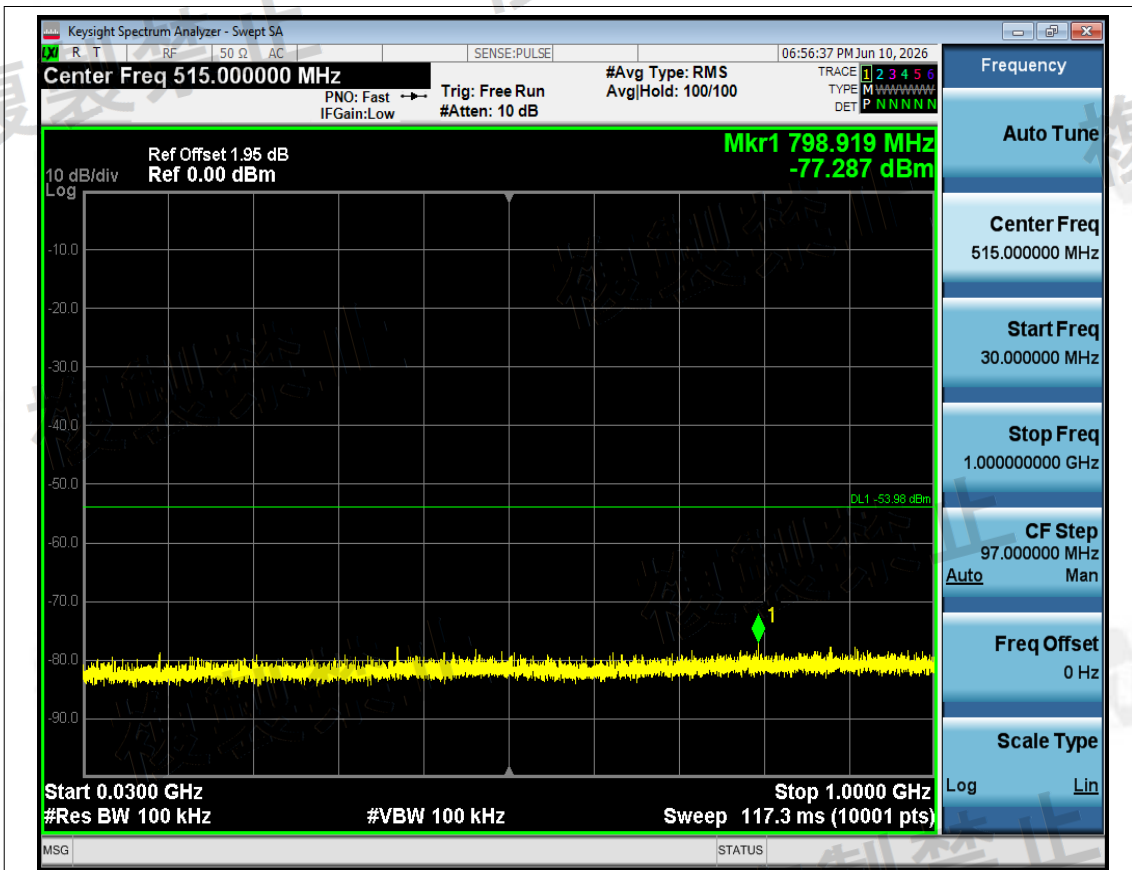

Rx. Spurious NVNT n40 2462MHz Ant1 @ 30MHz-1000MHz

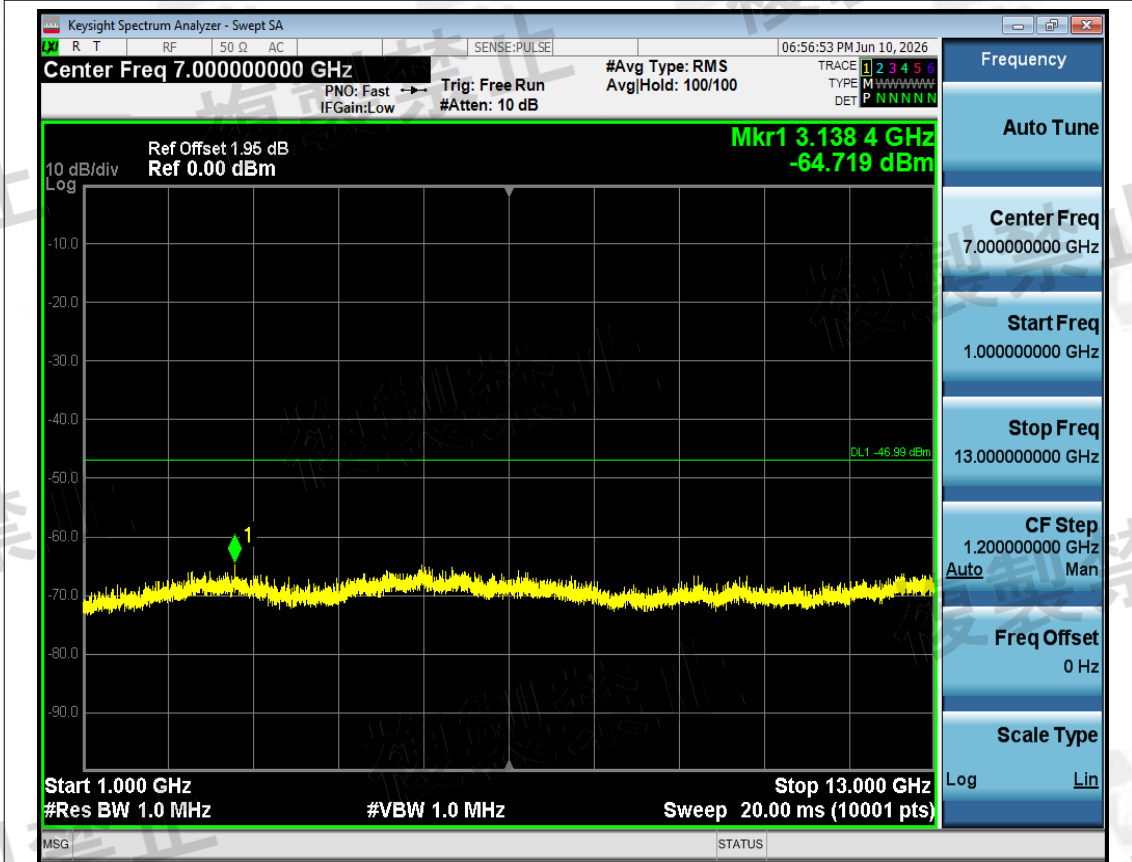

Rx. Spurious NVNT n40 2462MHz Ant1 @ 1000MHz-13000MHz



Carrier Sense

Condition	Mode	Frequency (MHz)	Antenna	CW Level (dBm)	Verdict
NVNT	n40	2422	Ant1	-44.8934827761407	Pass
NVNT	n40	2442	Ant1	-44.9649131921773	Pass
NVNT	n40	2462	Ant1	-45.035760971906	Pass

