



Appendix A

Product Name: AirBell Pro

Trade Mark: N/A


Test Model: AB_IC_A_01_22mm


Environmental Conditions


Test Engineer:	Emiya lin
Supervised by:	Simba Huang
Test Date:	2025-11-27


Frequency Error



Condition	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	2402	Ant1	2401.995	-5000	-2.08	50	Pass
	2440	Ant1	2439.994	-6000	-2.46	50	Pass
	2480	Ant1	2479.994	-6000	-2.42	50	Pass
LVNT	2402	Ant1	2401.99	-10000	-4.16	50	Pass
	2440	Ant1	2439.989	-11000	-4.51	50	Pass
	2480	Ant1	2479.989	-11000	-4.44	50	Pass
HVNT	2402	Ant1	2401.99	-10000	-4.16	50	Pass
	2440	Ant1	2439.99	-10000	-4.1	50	Pass
	2480	Ant1	2479.989	-11000	-4.44	50	Pass

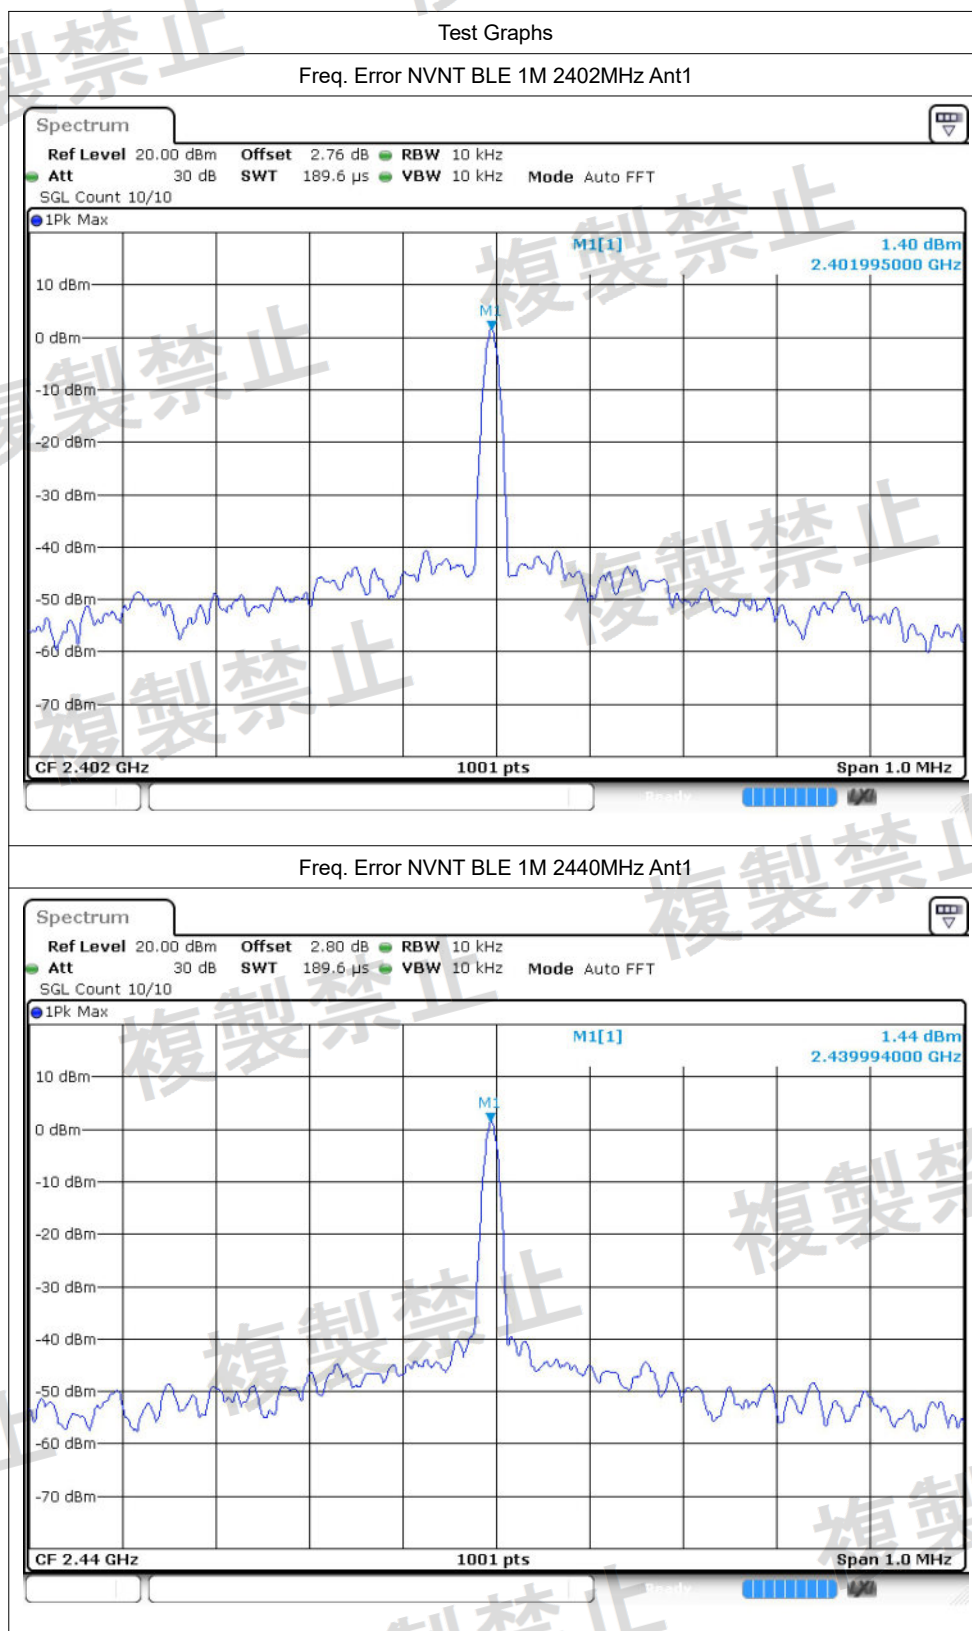


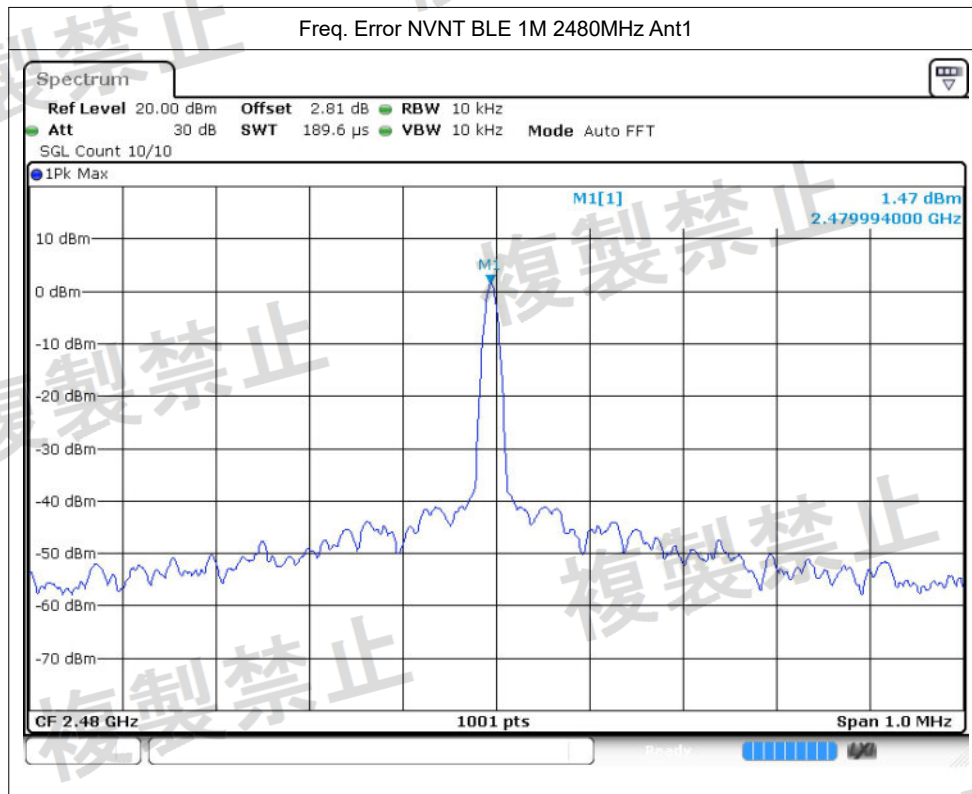

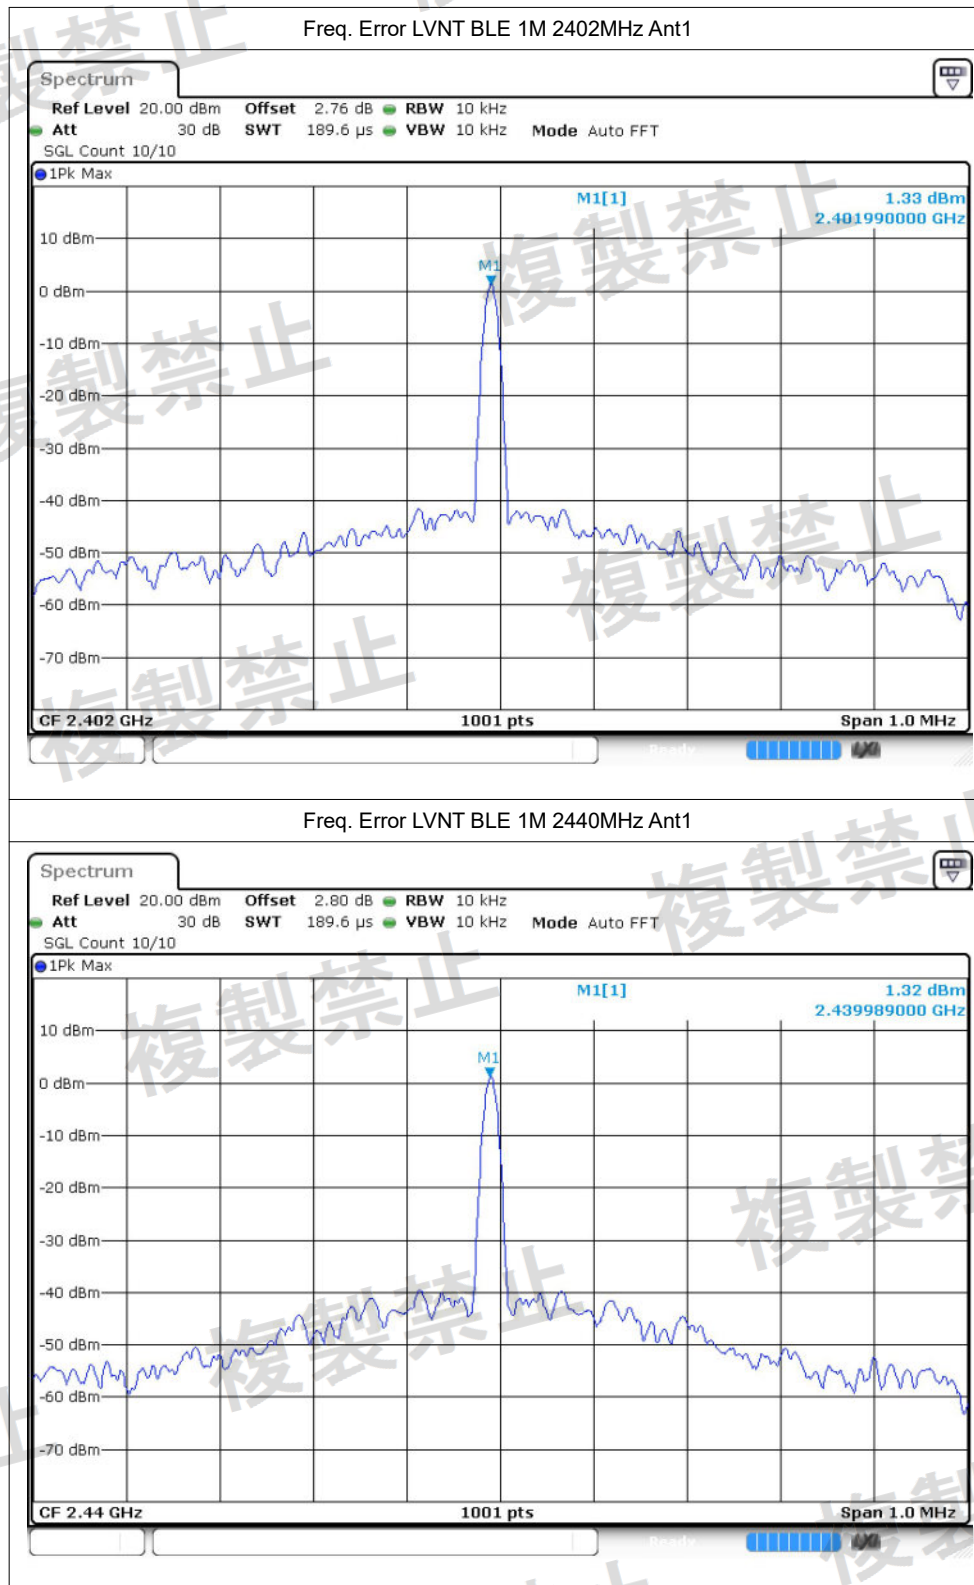

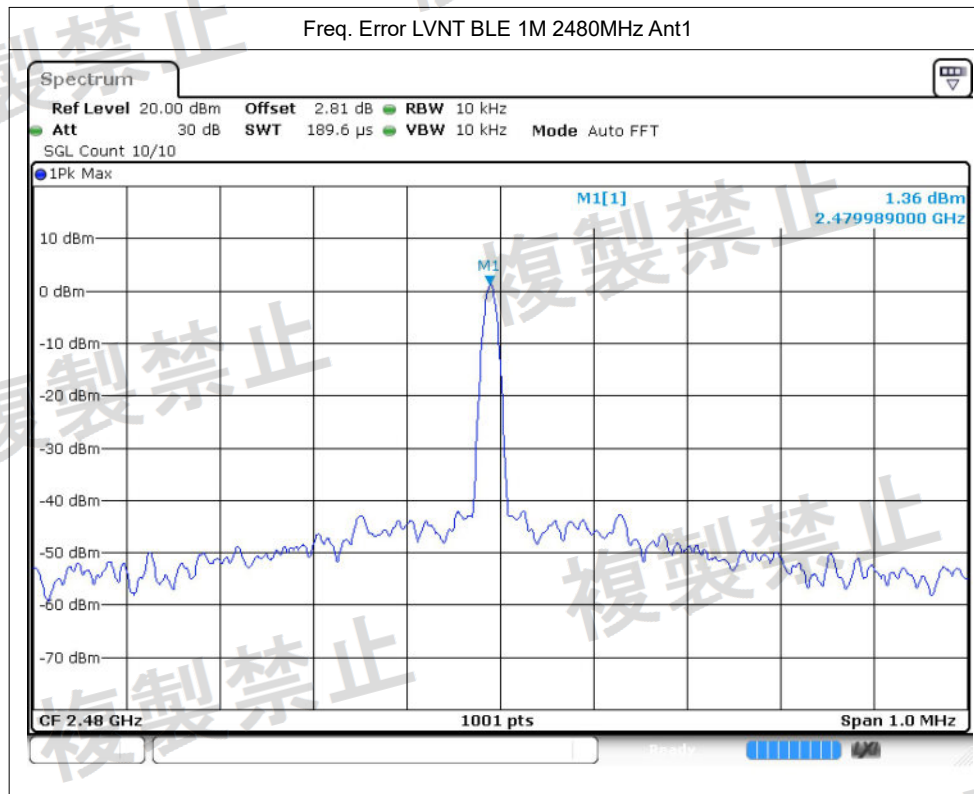

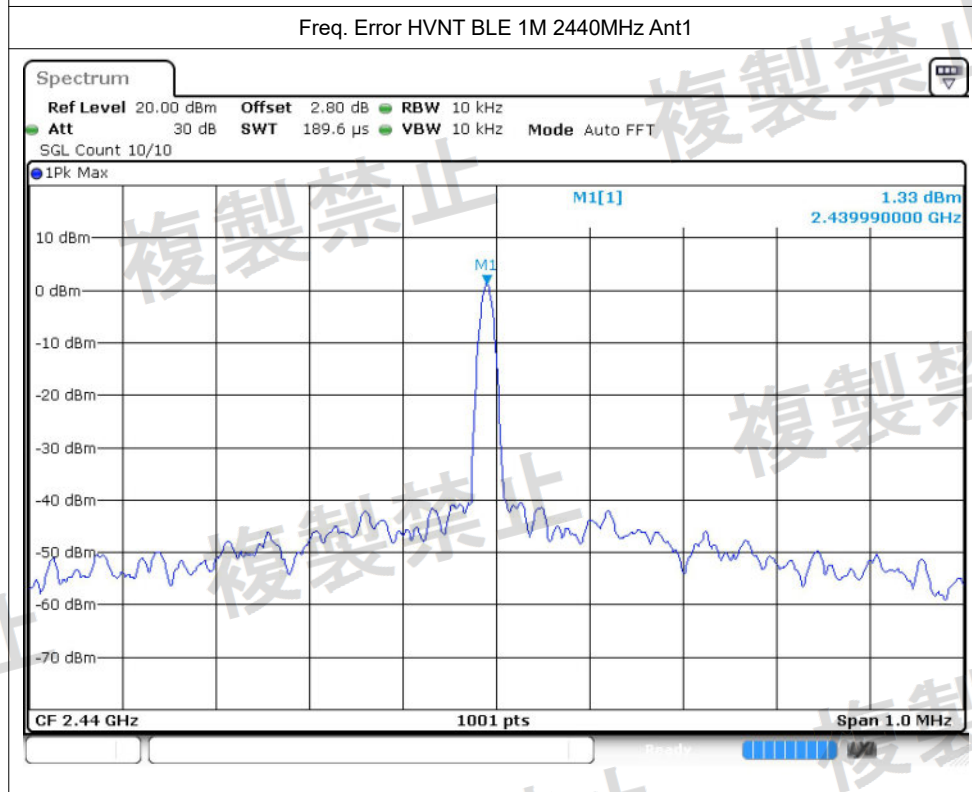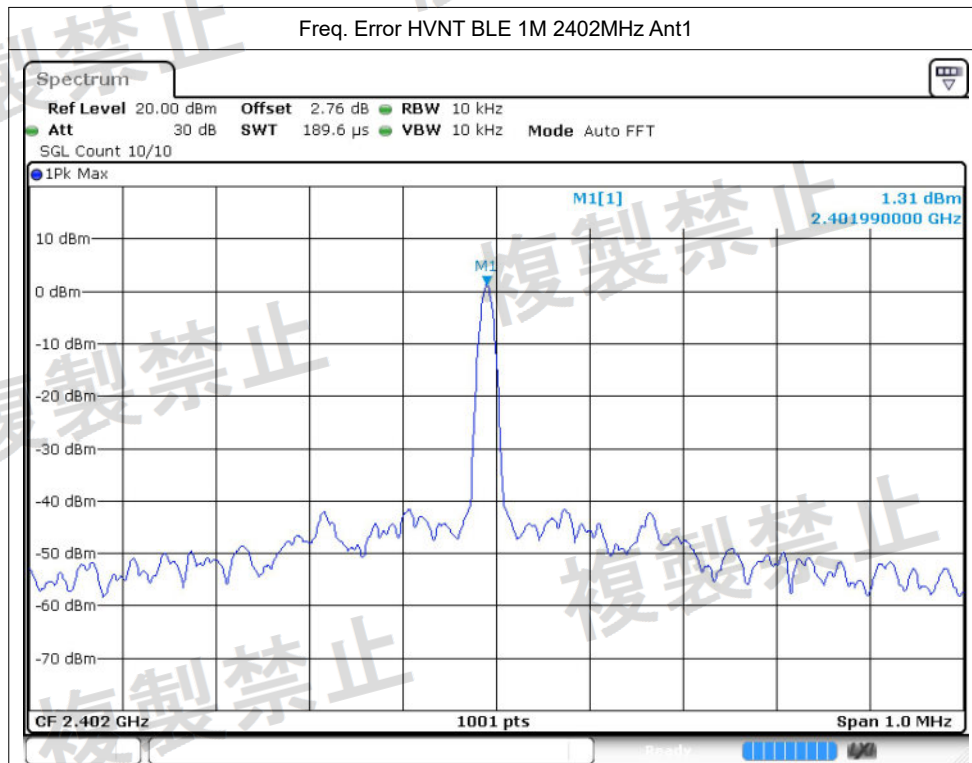

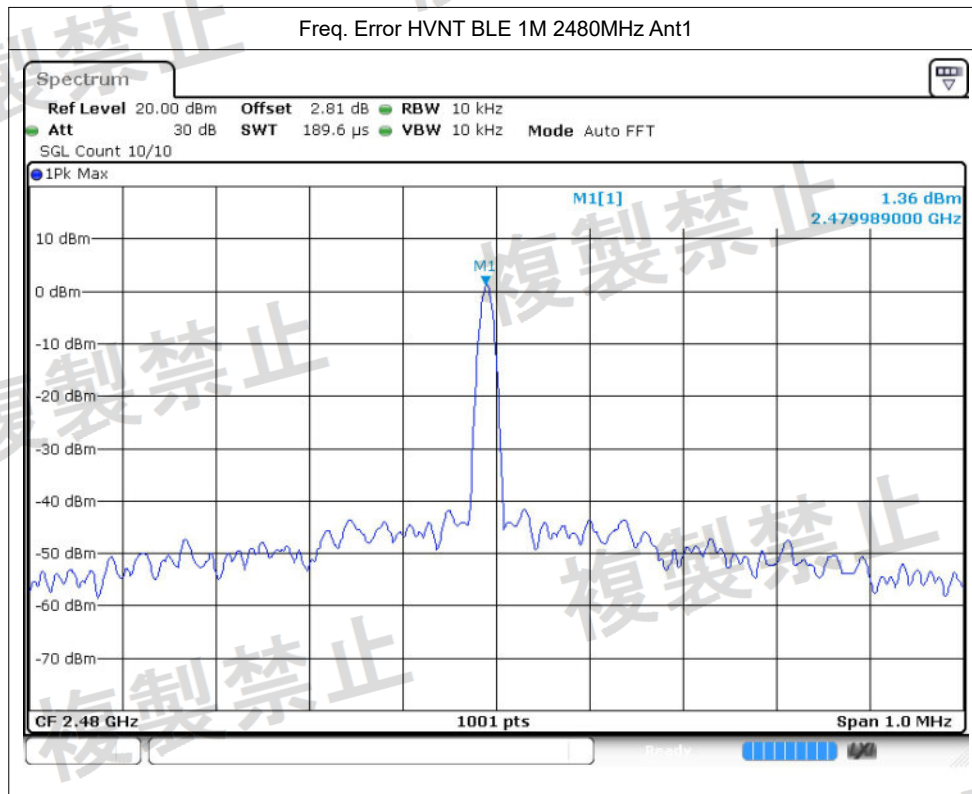


Antenna Power


Condition	Mode	Frequency (MHz)	Antenna	Power (dBm)	Power (mW)	Limit (mW)	Declared Power (mW)	Tolerance (%)	Upper Limit (%)	Verdict
NVNT	BLE 1M	2402	Ant1	0.89	1.227	10	1.5	-18.2	20	Pass
	BLE 1M	2440	Ant1	0.82	1.208	10	1.5	-19.47	20	Pass
	BLE 1M	2480	Ant1	0.8	1.202	10	1.5	-19.87	20	Pass
	BLE 2M	2402	Ant1	0.81	1.205	10	1.5	-19.67	20	Pass
	BLE 2M	2440	Ant1	0.75	1.189	10	1.5	-20.73	20	Pass
	BLE 2M	2480	Ant1	0.72	1.18	10	1.5	-21.33	20	Pass
LVNT	BLE 1M	2402	Ant1	0.87	1.222	10	1.5	-18.53	20	Pass
	BLE 1M	2440	Ant1	0.81	1.205	10	1.5	-19.67	20	Pass
	BLE 1M	2480	Ant1	0.78	1.197	10	1.5	-20.2	20	Pass
	BLE 2M	2402	Ant1	0.72	1.18	10	1.5	-21.33	20	Pass
	BLE 2M	2440	Ant1	0.74	1.186	10	1.5	-20.93	20	Pass
	BLE 2M	2480	Ant1	0.7	1.175	10	1.5	-21.67	20	Pass
HVNT	BLE 1M	2402	Ant1	0.85	1.216	10	1.5	-18.93	20	Pass
	BLE 1M	2440	Ant1	0.81	1.205	10	1.5	-19.67	20	Pass
	BLE 1M	2480	Ant1	0.82	1.208	10	1.5	-19.47	20	Pass
	BLE 2M	2402	Ant1	0.76	1.191	10	1.5	-20.6	20	Pass
	BLE 2M	2440	Ant1	0.71	1.178	10	1.5	-21.47	20	Pass
	BLE 2M	2480	Ant1	0.69	1.172	10	1.5	-21.87	20	Pass


Test Graphs


Power NVNT BLE 1M 2402MHz Ant1

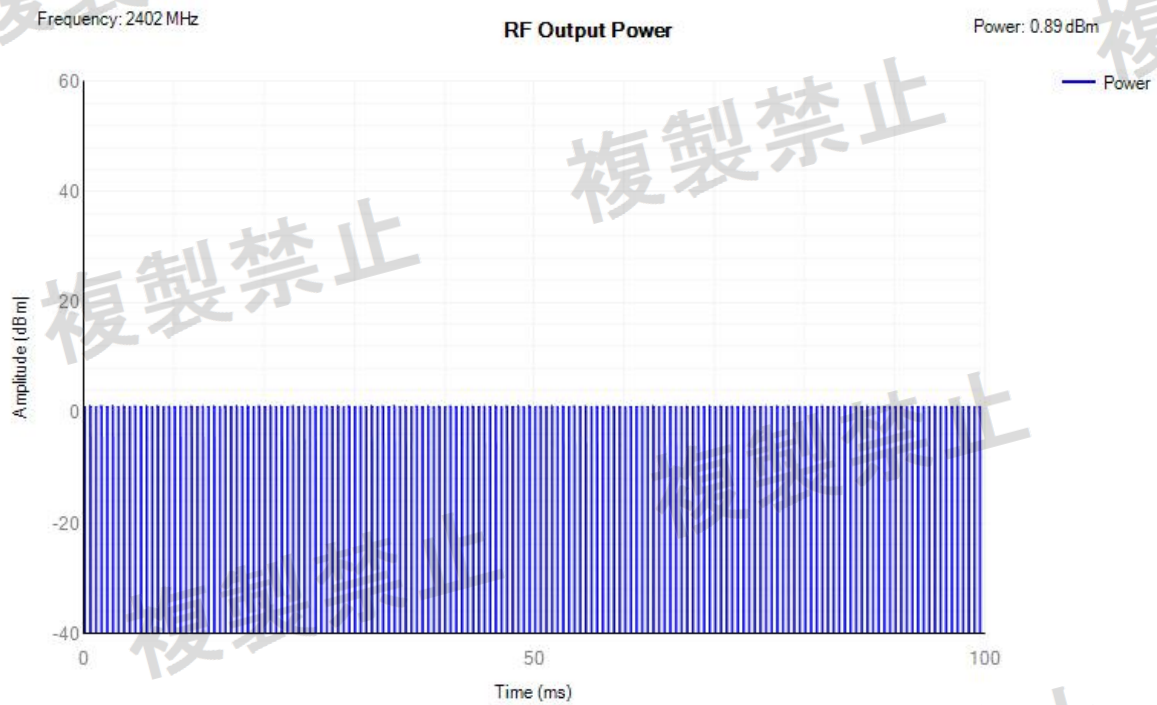



Power NVNT BLE 1M 2440MHz Ant1

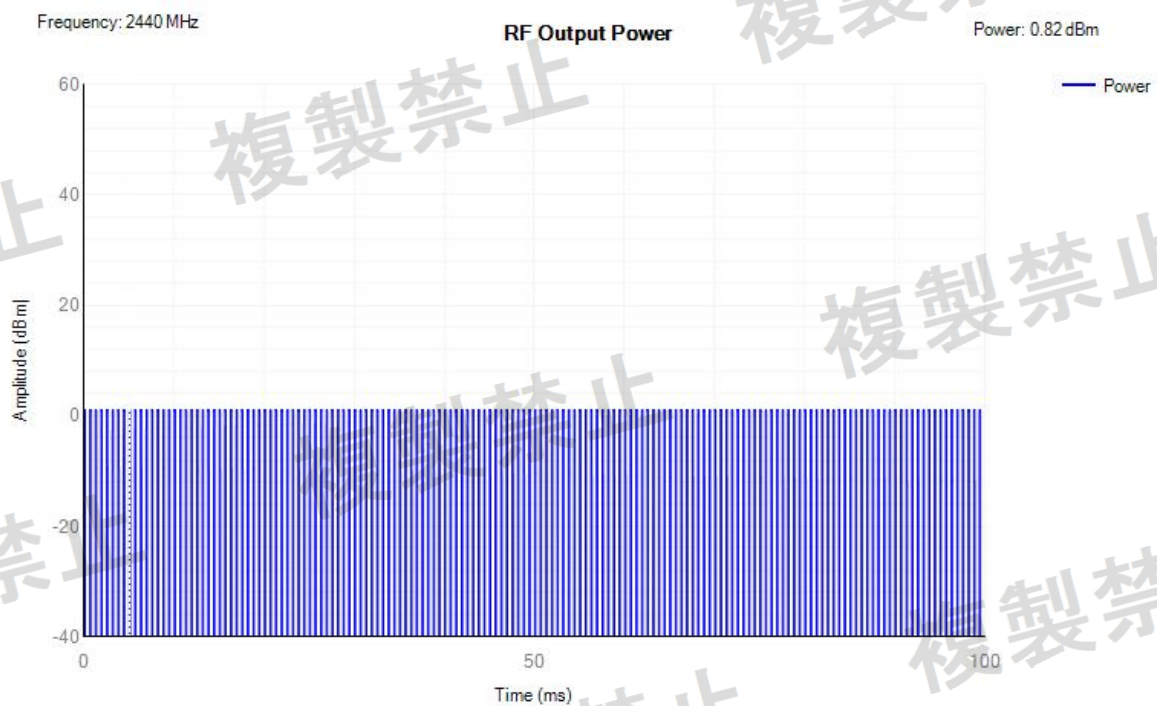


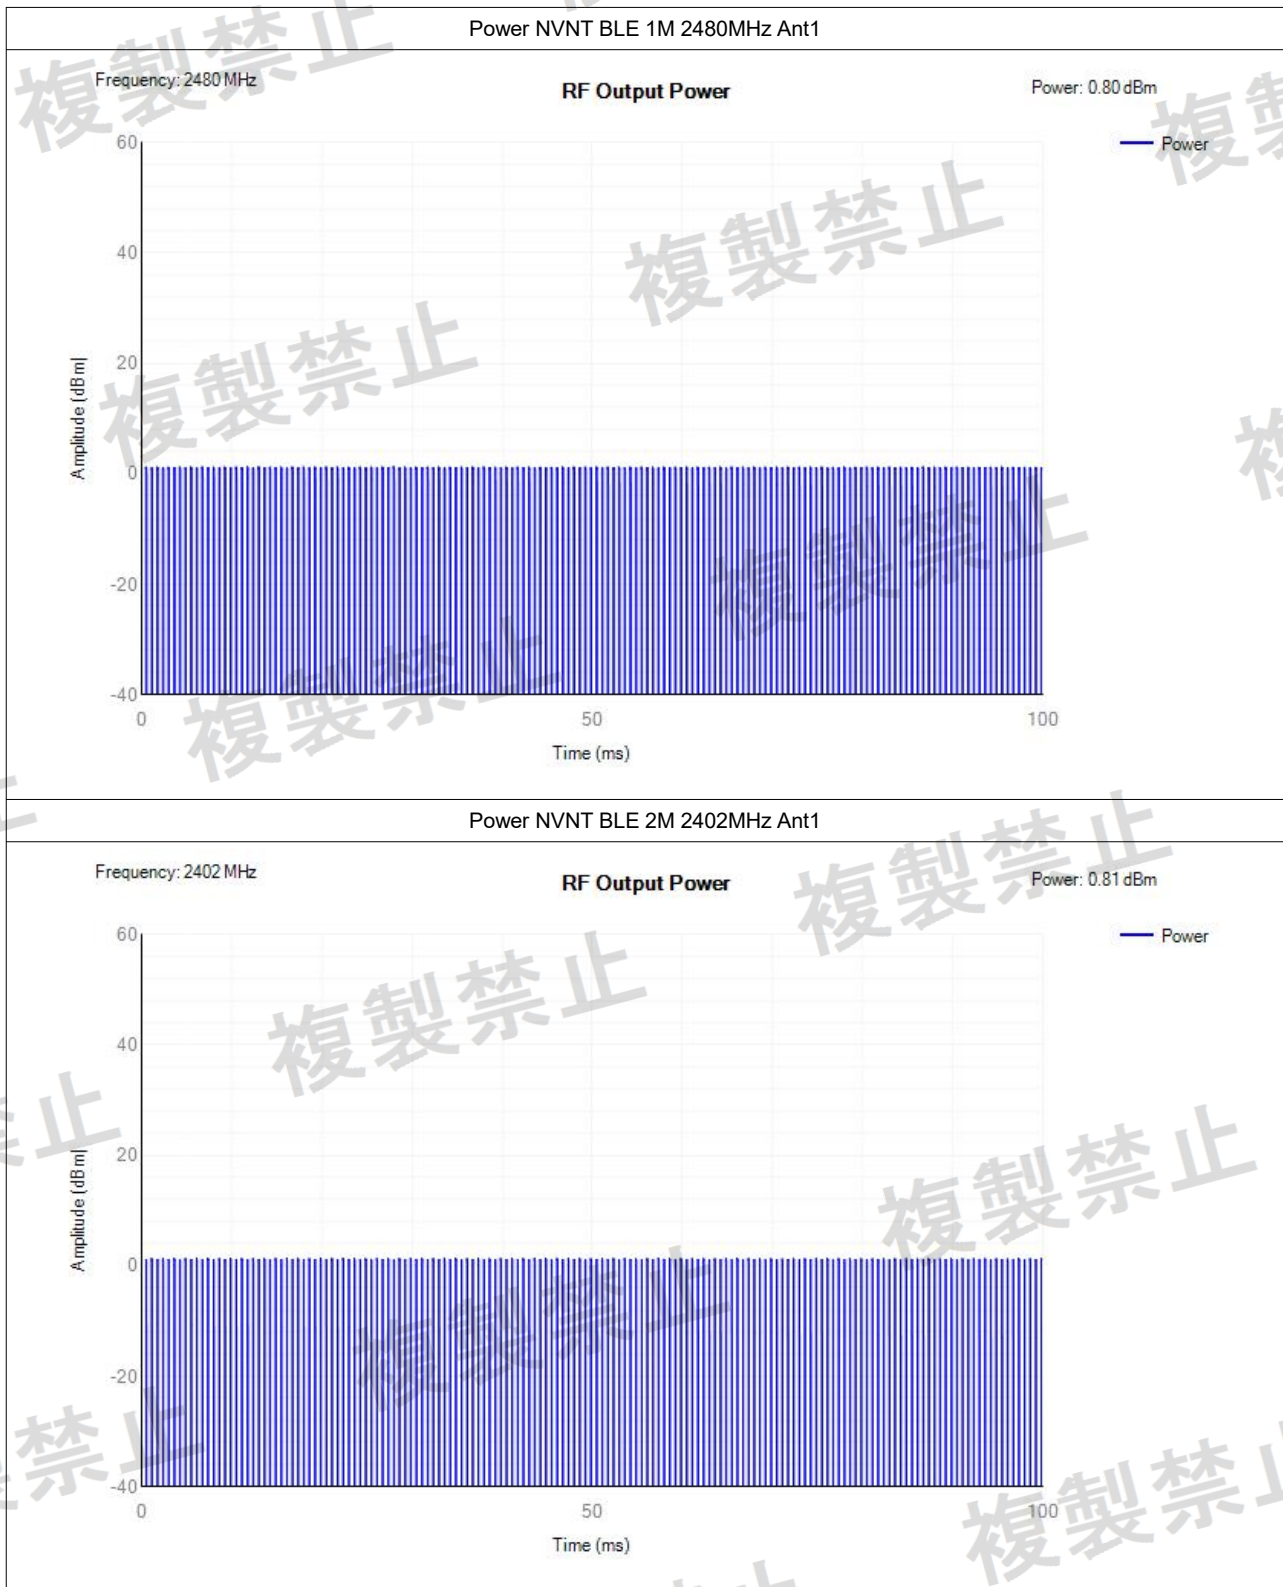


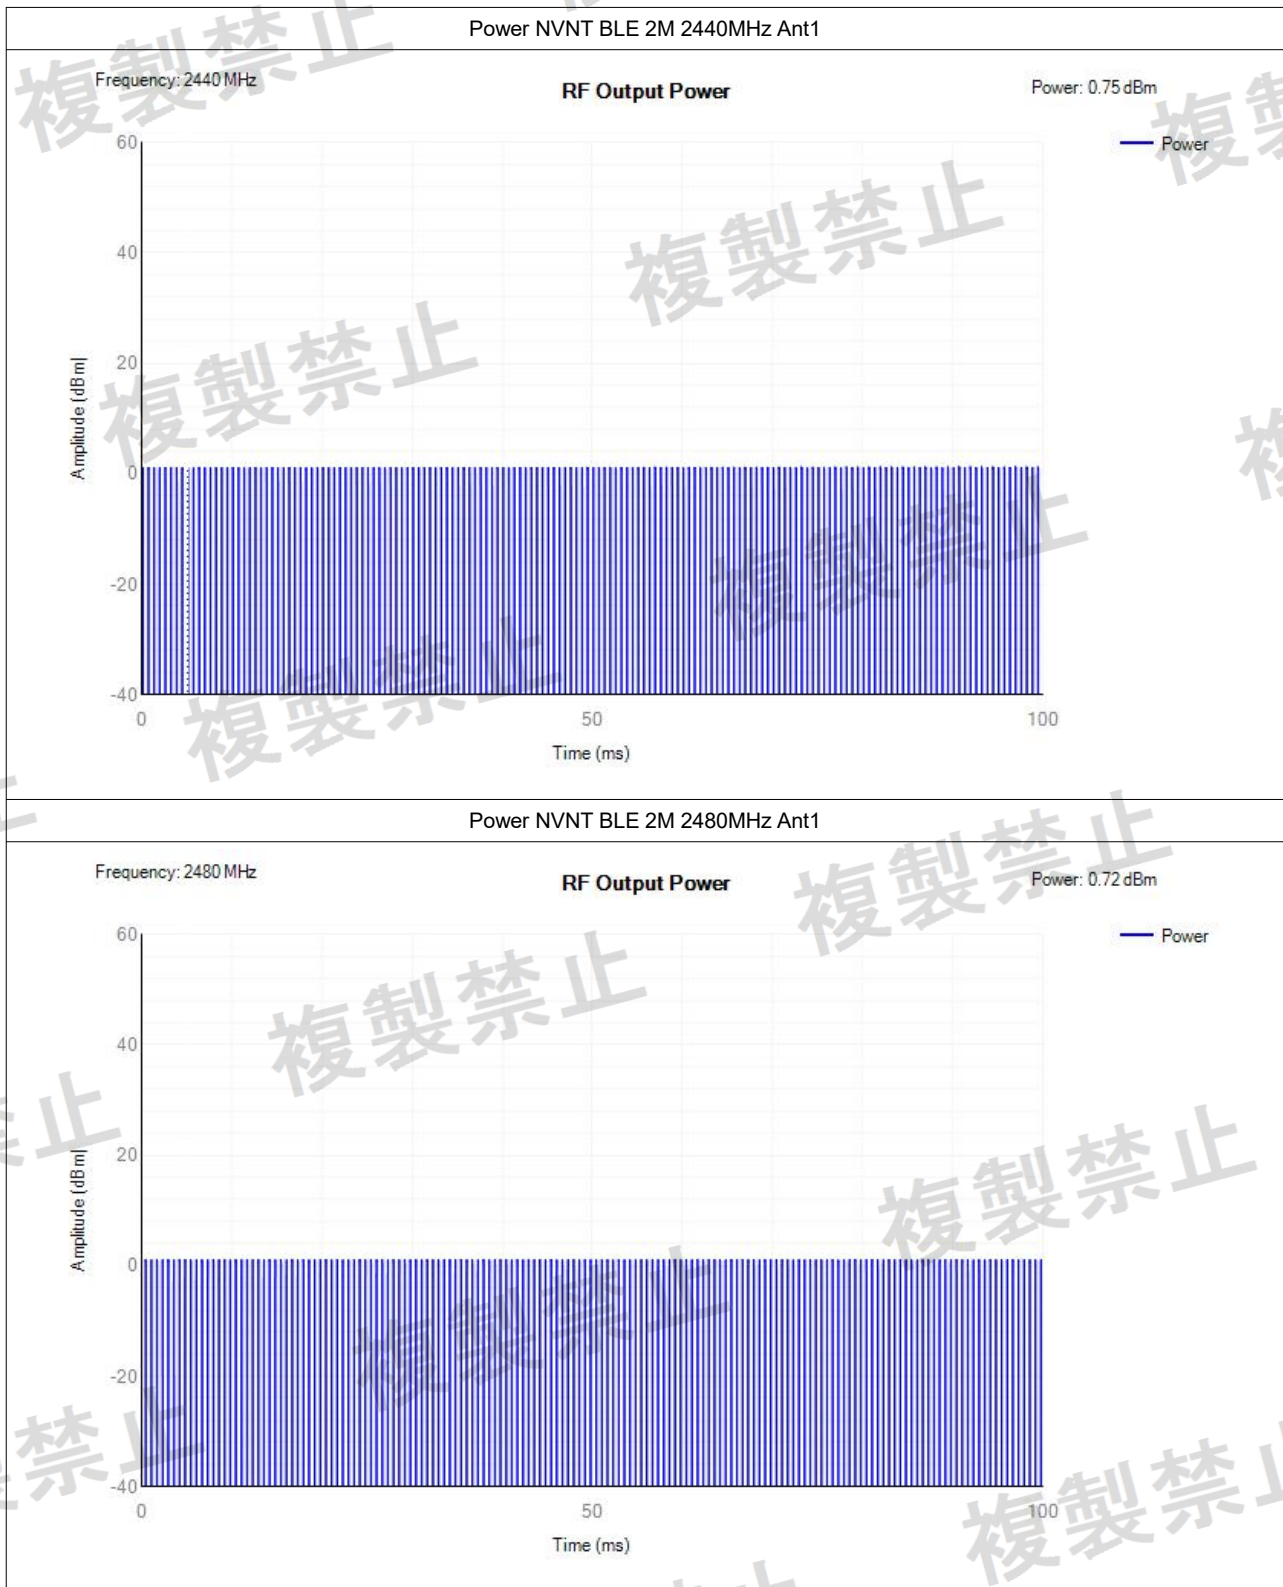


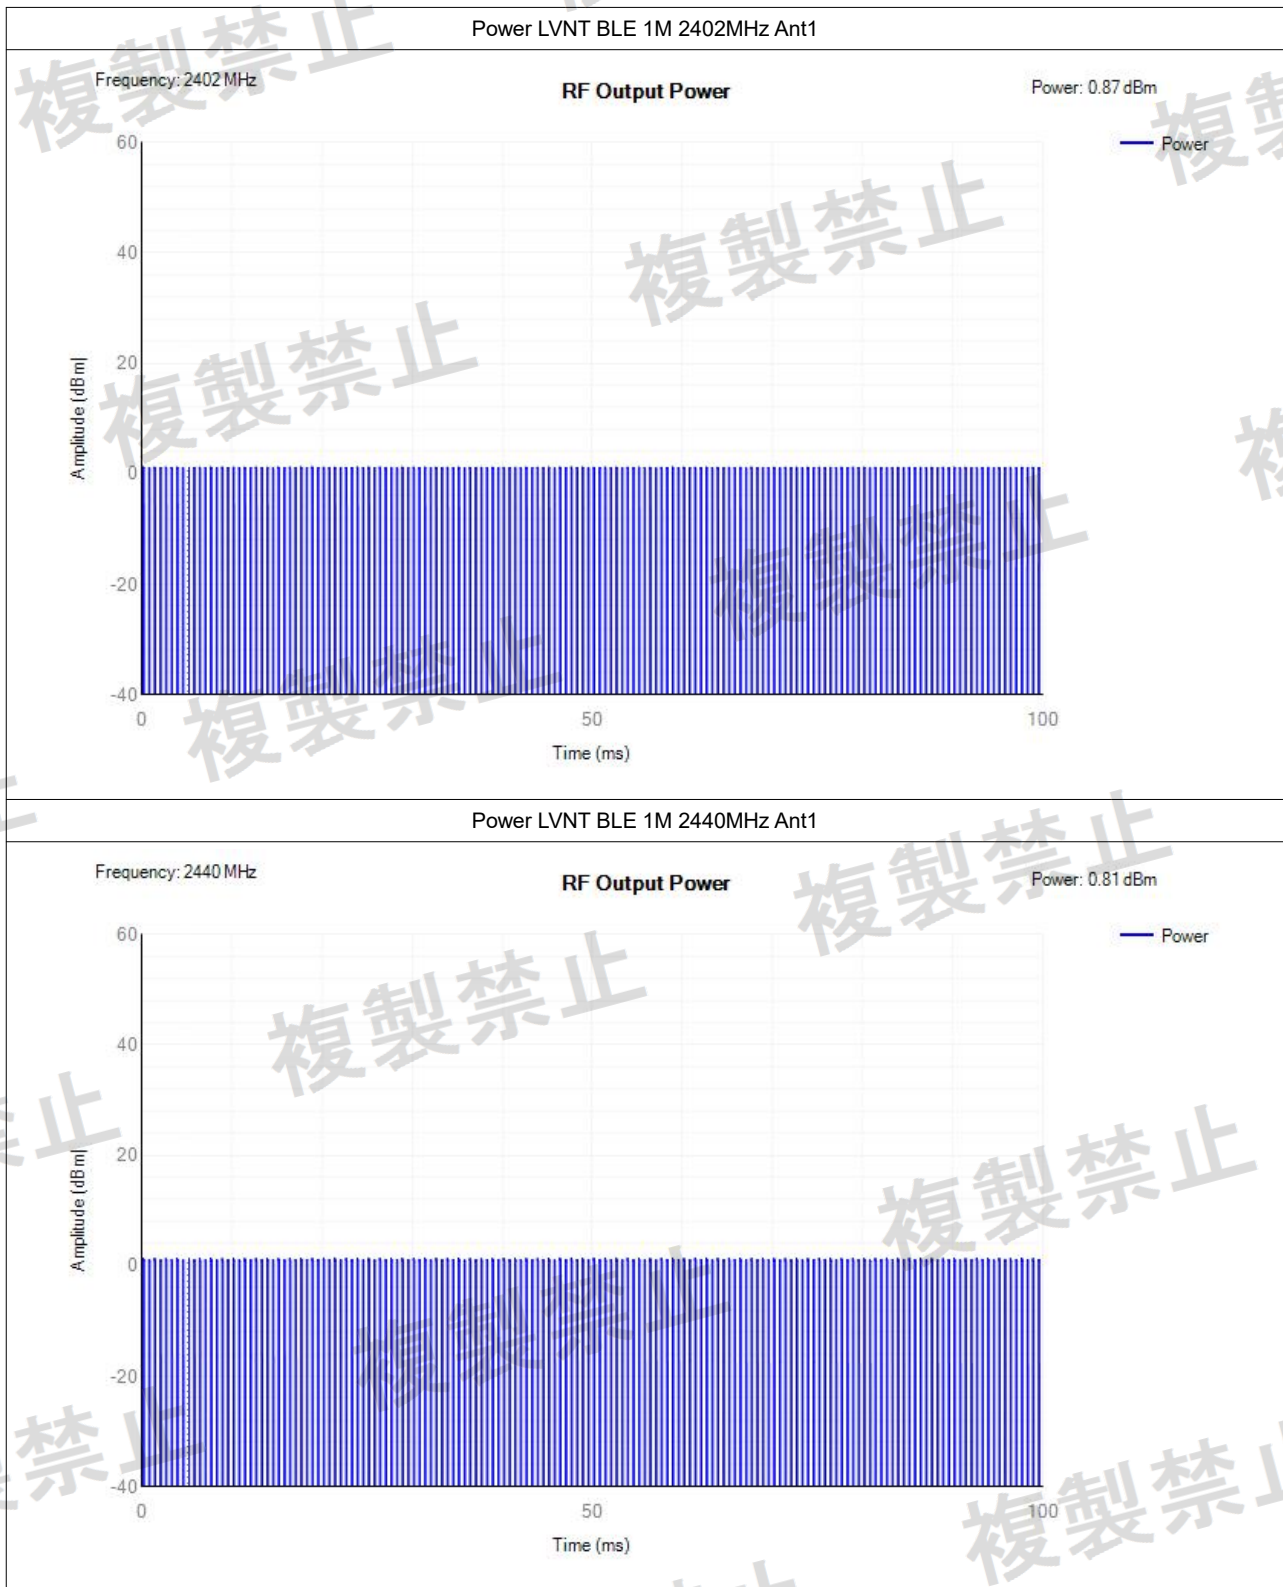


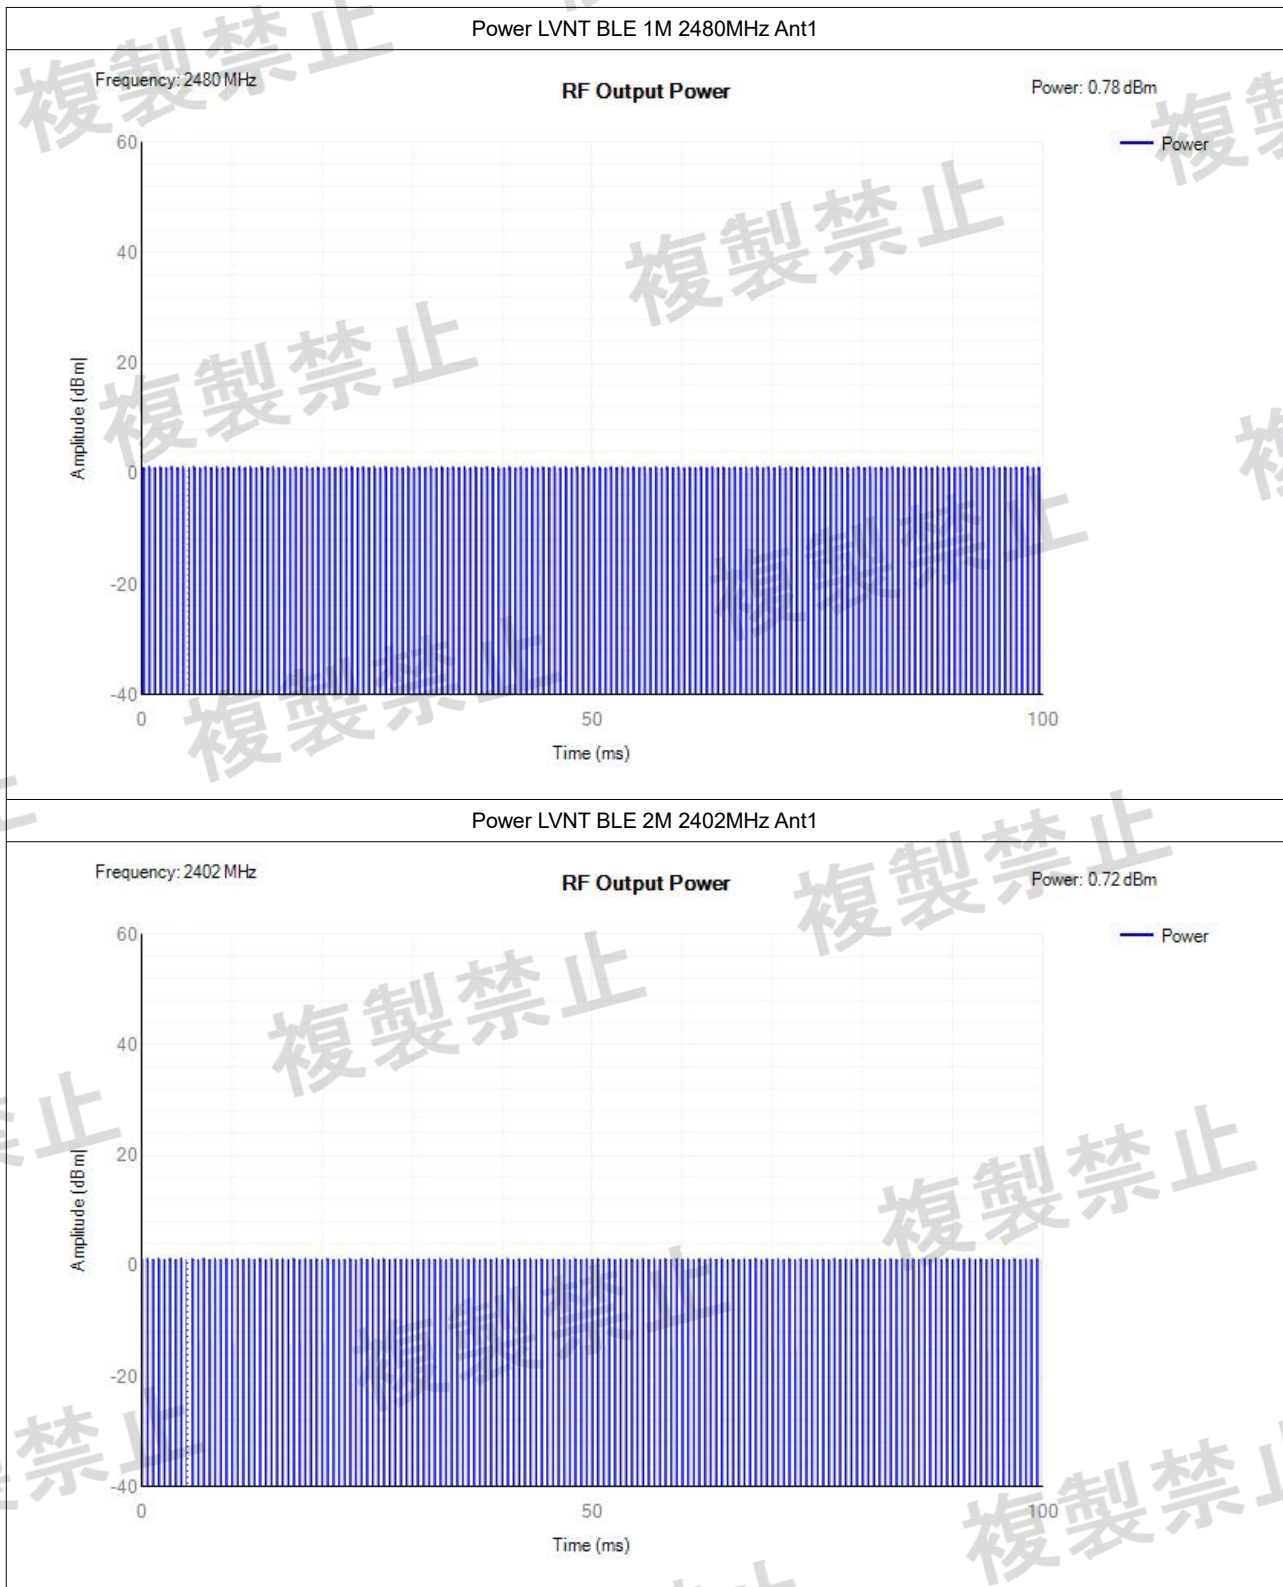

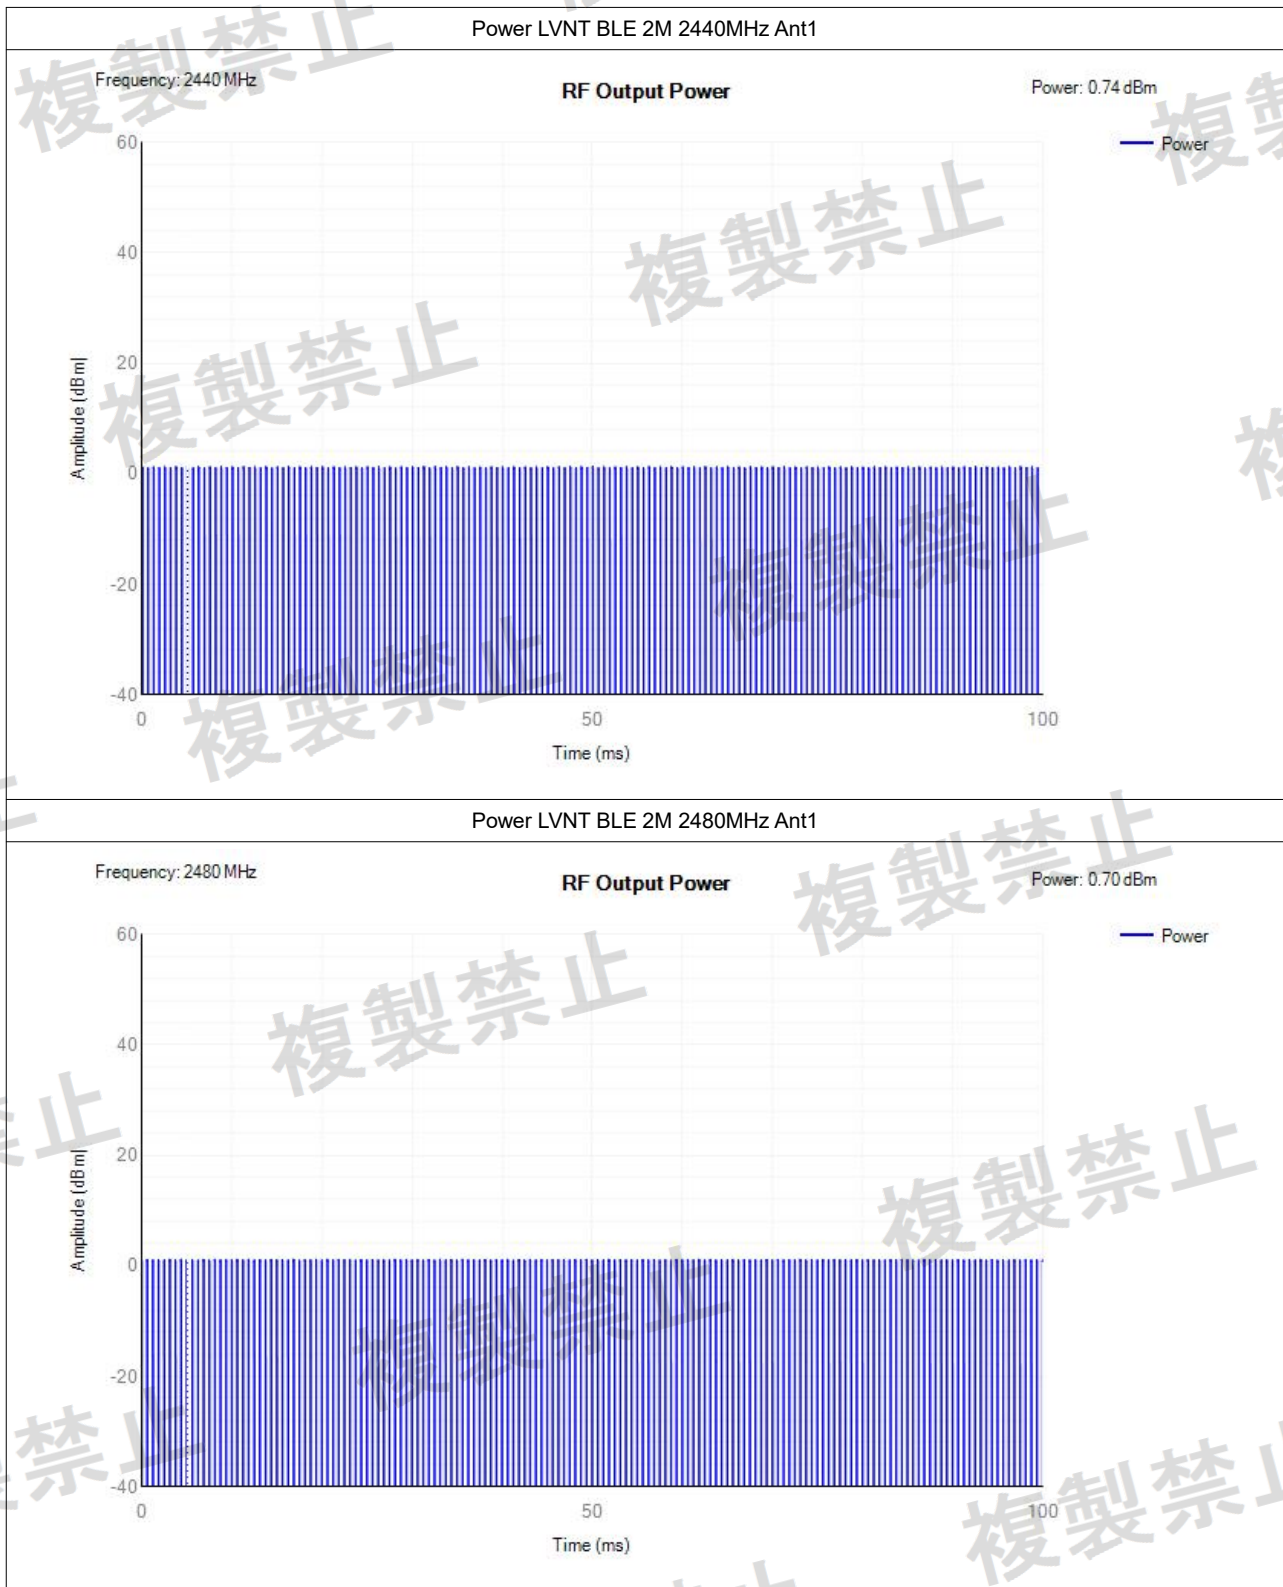

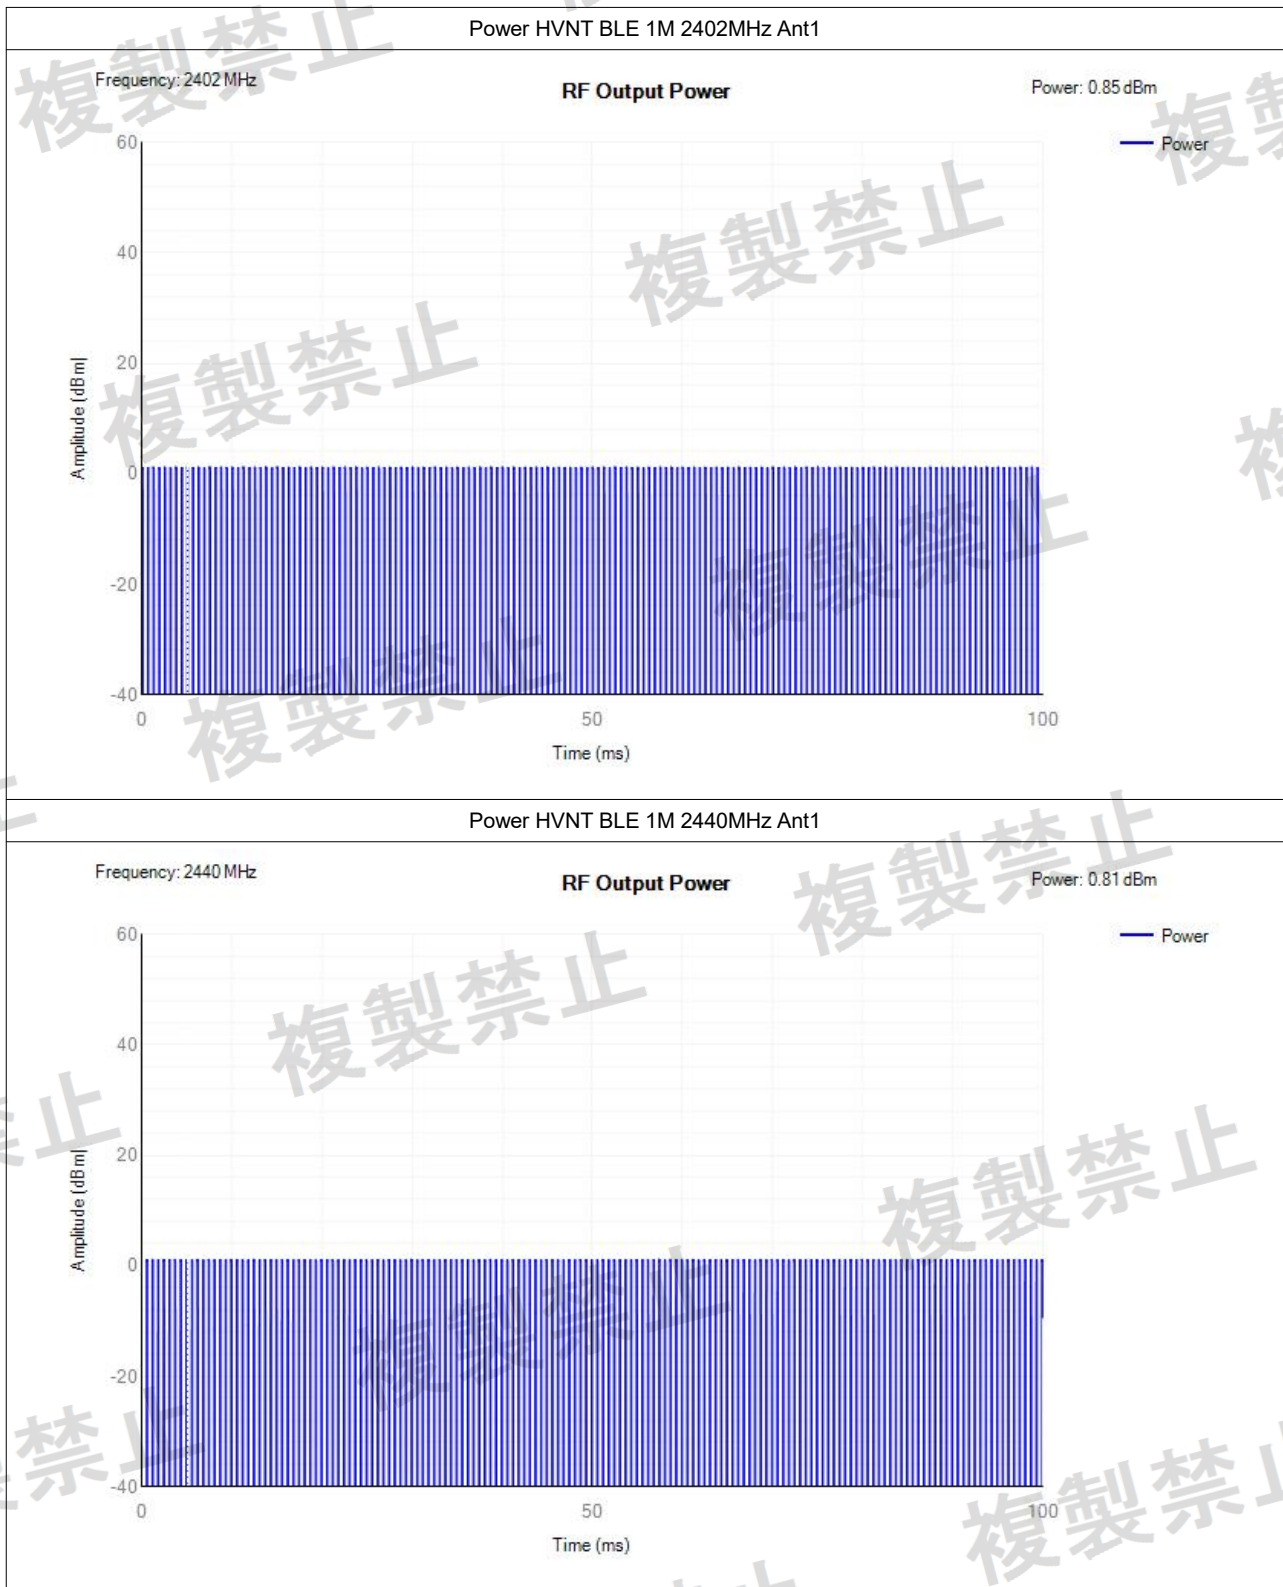

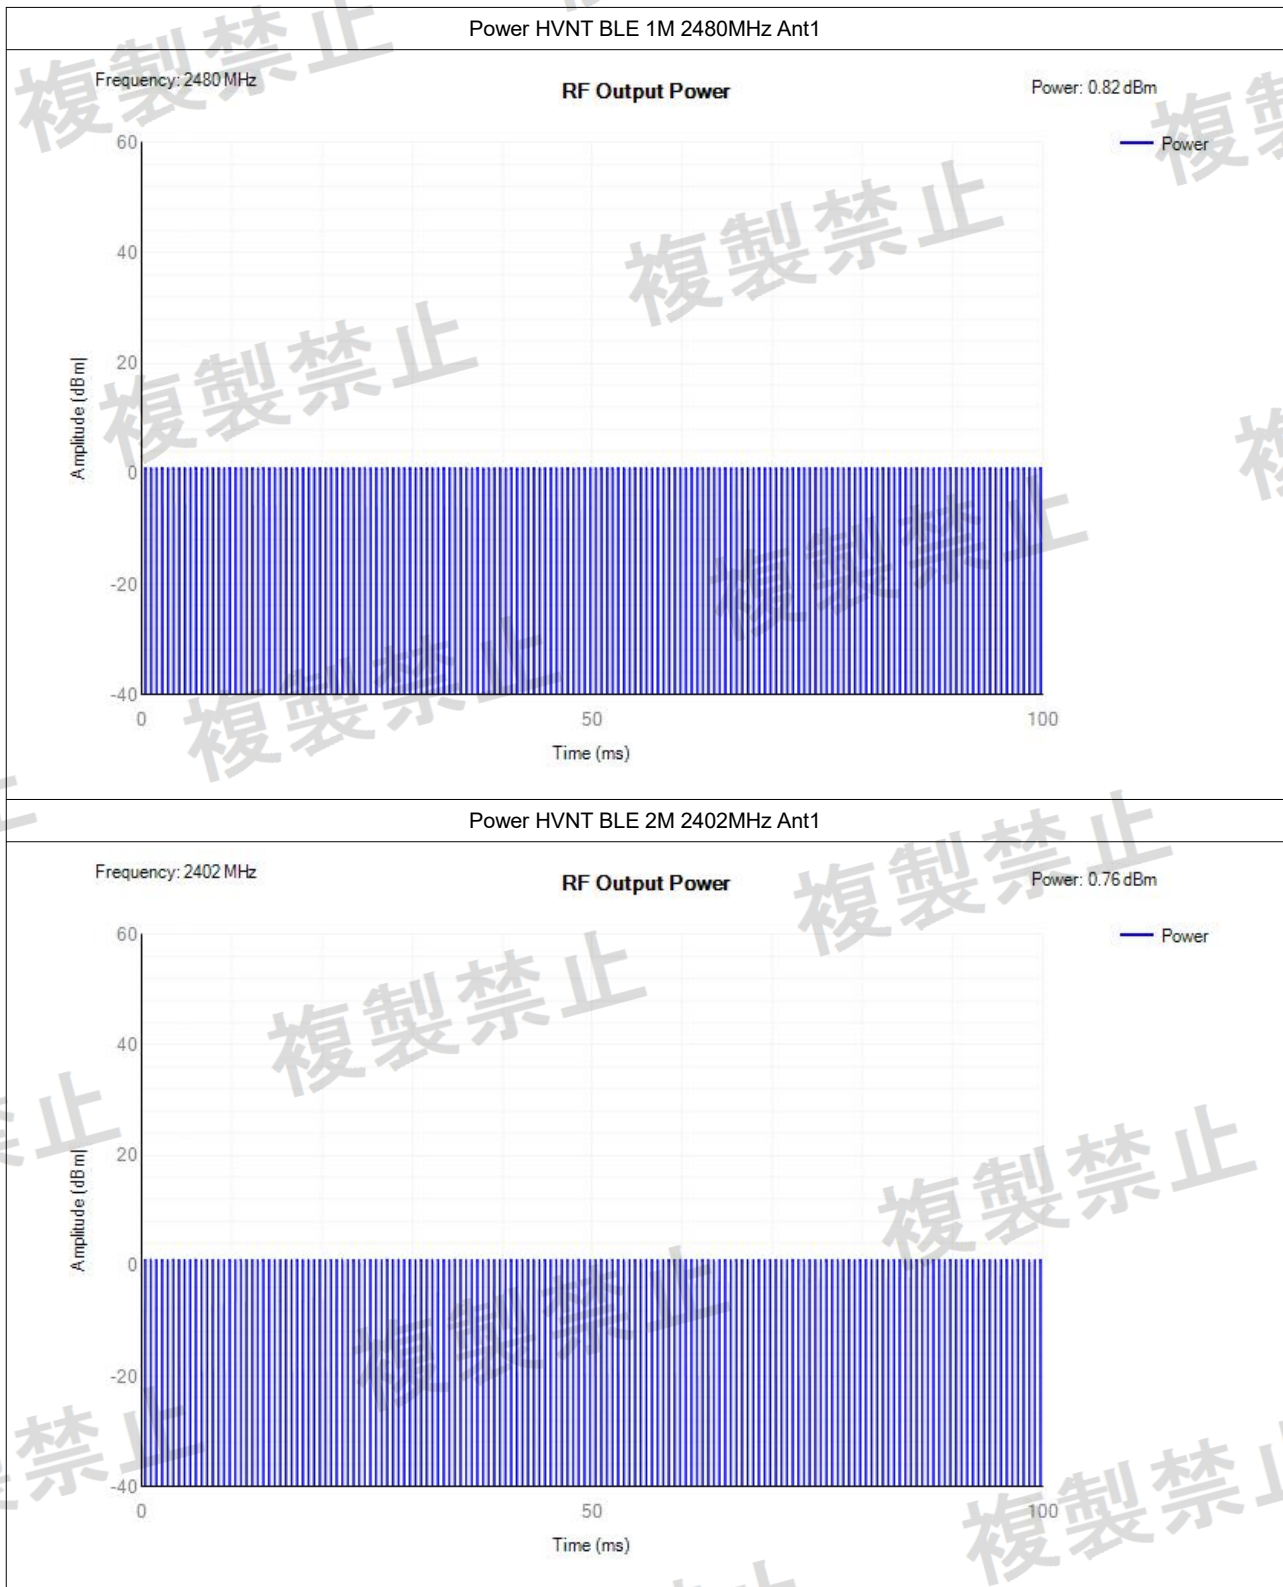

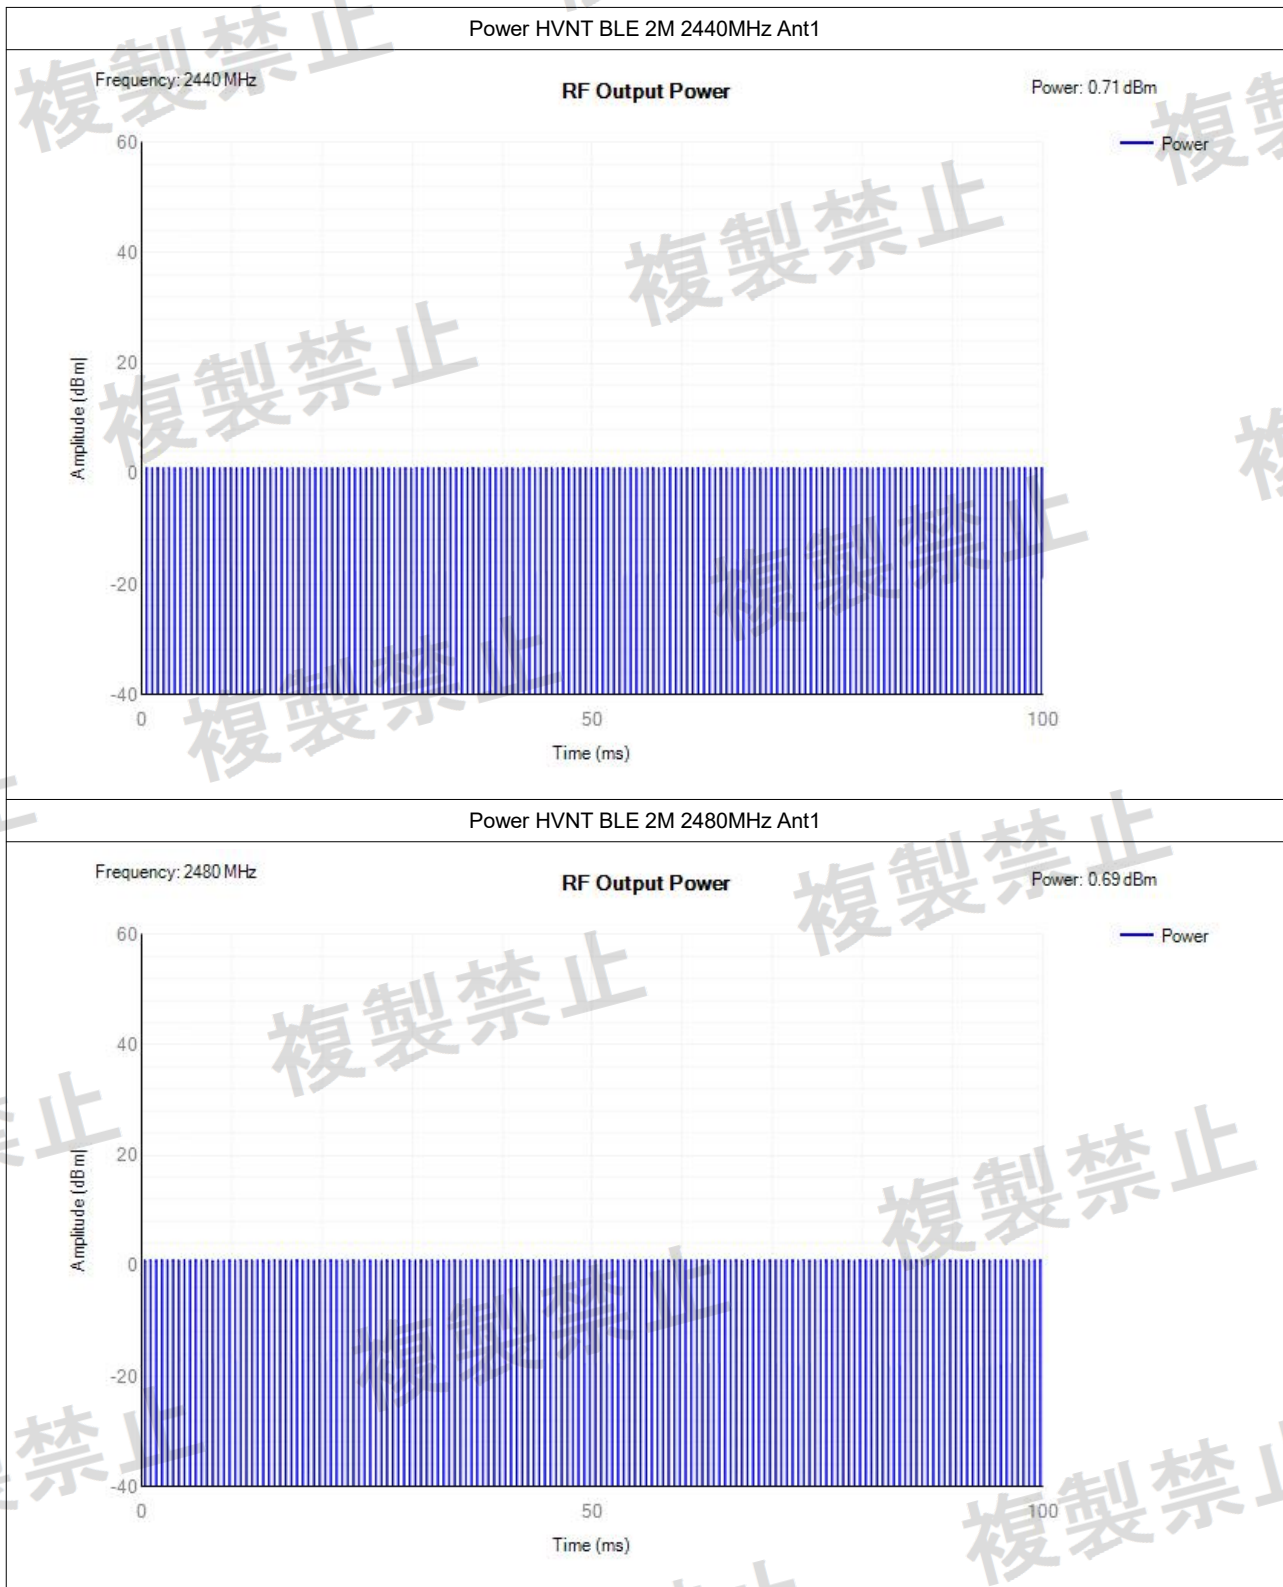




EIRP Power



Condition	Mode	Frequency (MHz)	Antenna	Antenna Power (mW)	Antenna Power (dBm)	Gain (dBi)	EIRP Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	1.227	0.89	2.2	3.09	12.14	Pass
	BLE 1M	2440	Ant1	1.208	0.82	2.2	3.02	12.14	Pass
	BLE 1M	2480	Ant1	1.202	0.8	2.2	3	12.14	Pass
	BLE 2M	2402	Ant1	1.205	0.81	2.2	3.01	12.14	Pass
	BLE 2M	2440	Ant1	1.189	0.75	2.2	2.95	12.14	Pass
	BLE 2M	2480	Ant1	1.18	0.72	2.2	2.92	12.14	Pass
LVNT	BLE 1M	2402	Ant1	1.222	0.87	2.2	3.07	12.14	Pass
	BLE 1M	2440	Ant1	1.205	0.81	2.2	3.01	12.14	Pass
	BLE 1M	2480	Ant1	1.197	0.78	2.2	2.98	12.14	Pass
	BLE 2M	2402	Ant1	1.18	0.72	2.2	2.92	12.14	Pass
	BLE 2M	2440	Ant1	1.186	0.74	2.2	2.94	12.14	Pass
	BLE 2M	2480	Ant1	1.175	0.7	2.2	2.9	12.14	Pass
HVNT	BLE 1M	2402	Ant1	1.216	0.85	2.2	3.05	12.14	Pass
	BLE 1M	2440	Ant1	1.205	0.81	2.2	3.01	12.14	Pass
	BLE 1M	2480	Ant1	1.208	0.82	2.2	3.02	12.14	Pass
	BLE 2M	2402	Ant1	1.191	0.76	2.2	2.96	12.14	Pass
	BLE 2M	2440	Ant1	1.178	0.71	2.2	2.91	12.14	Pass
	BLE 2M	2480	Ant1	1.172	0.69	2.2	2.89	12.14	Pass



Occupied Channel Bandwidth



Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.031
	BLE 1M	2440	Ant1	1.034
	BLE 1M	2480	Ant1	1.046
	BLE 2M	2402	Ant1	2.047
	BLE 2M	2440	Ant1	2.071
	BLE 2M	2480	Ant1	2.053
LVNT	BLE 1M	2402	Ant1	1.037
	BLE 1M	2440	Ant1	1.043
	BLE 1M	2480	Ant1	1.034
	BLE 2M	2402	Ant1	2.062
	BLE 2M	2440	Ant1	2.05
	BLE 2M	2480	Ant1	2.059
HVNT	BLE 1M	2402	Ant1	1.034
	BLE 1M	2440	Ant1	1.022
	BLE 1M	2480	Ant1	1.034
	BLE 2M	2402	Ant1	2.032
	BLE 2M	2440	Ant1	2.032
	BLE 2M	2480	Ant1	2.065


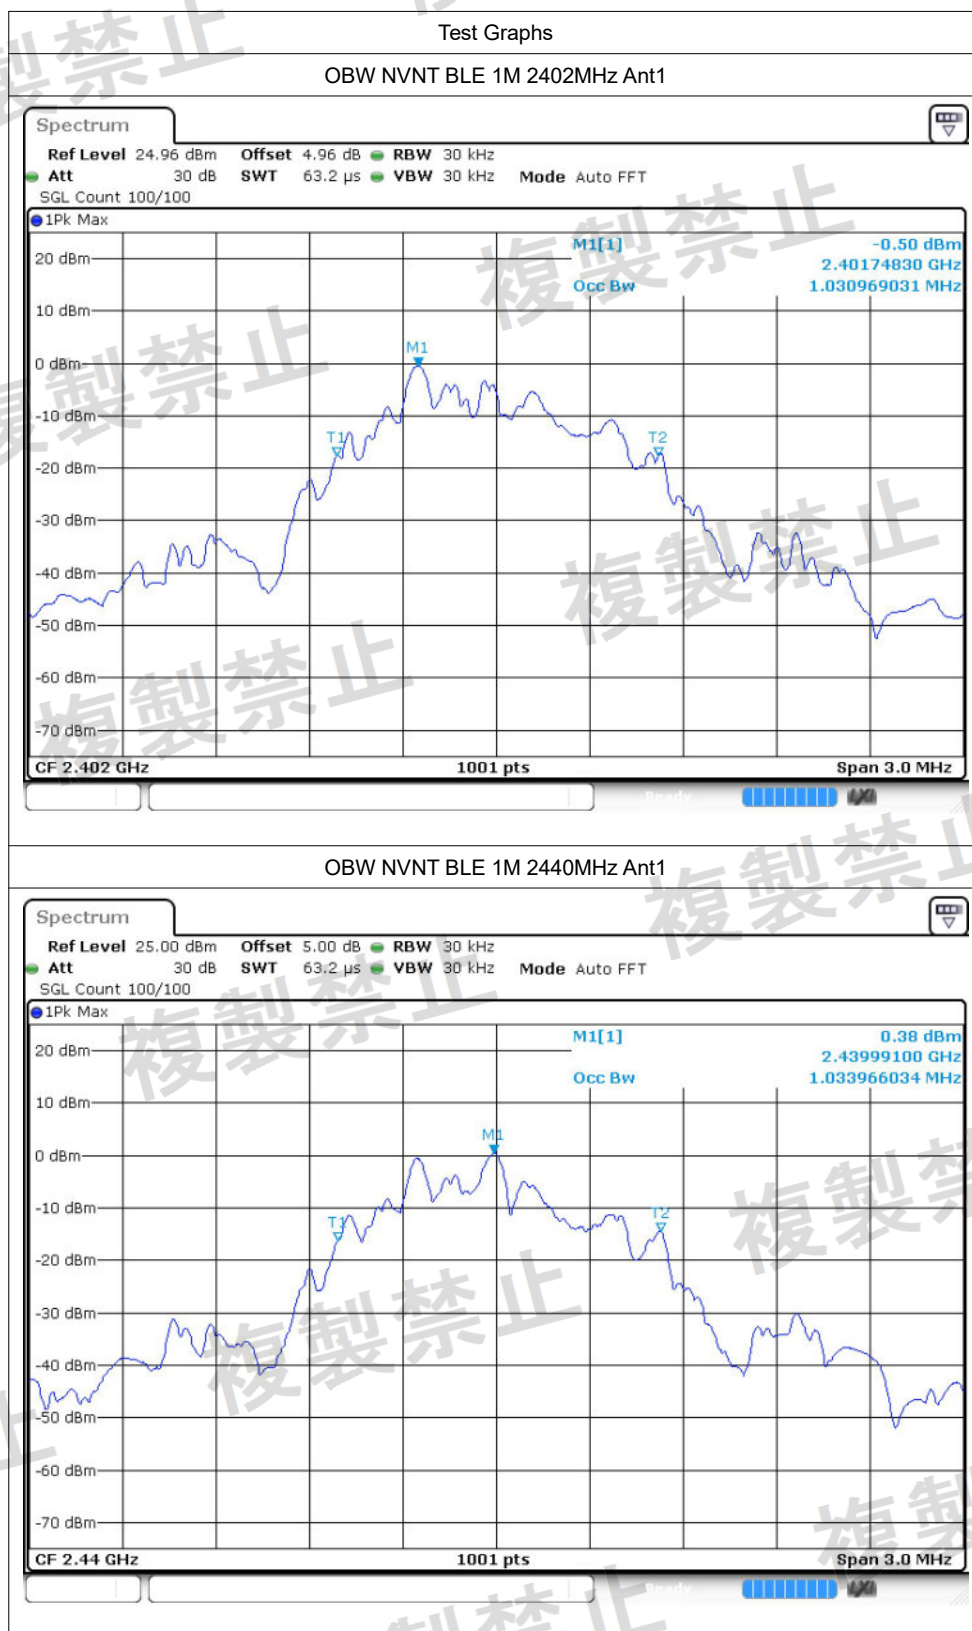


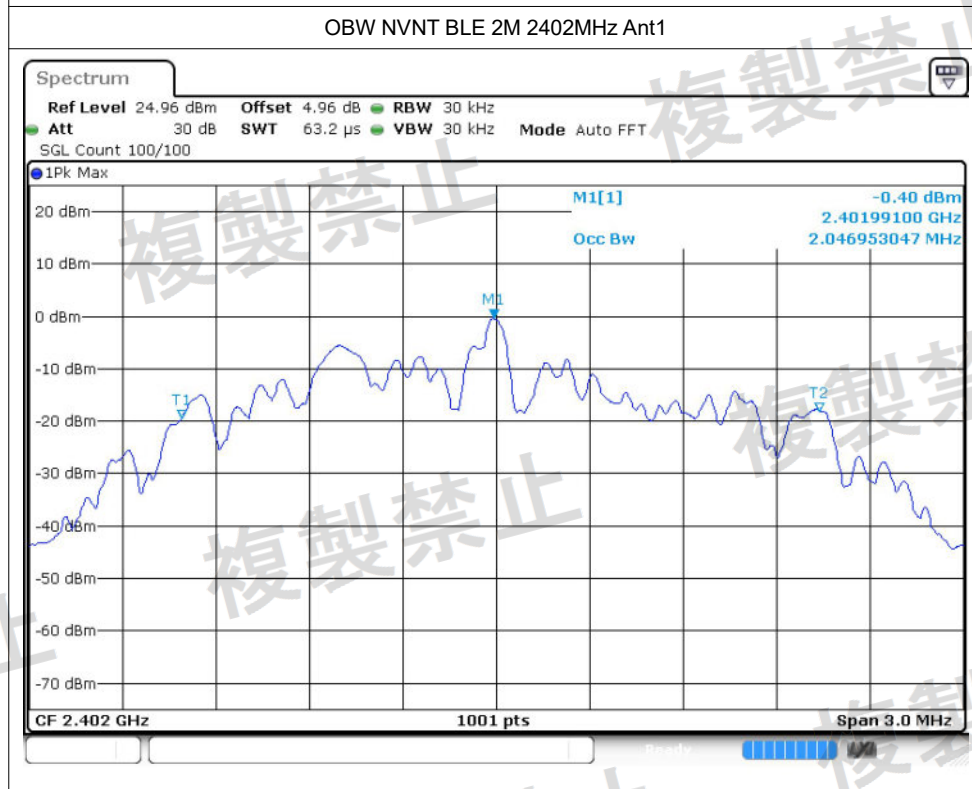
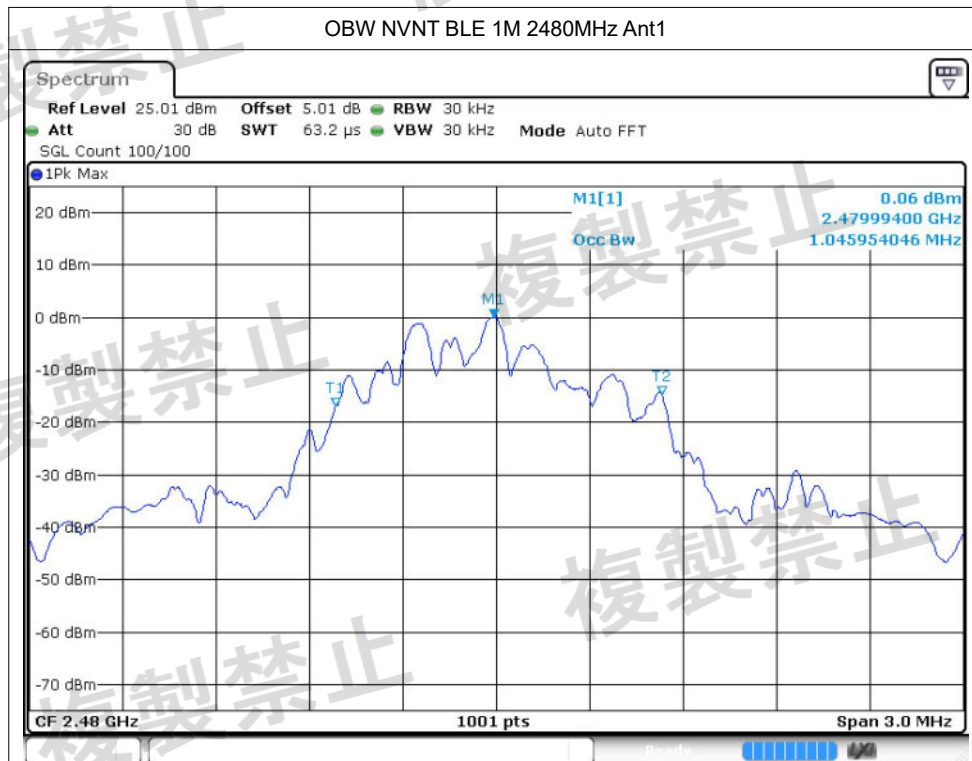


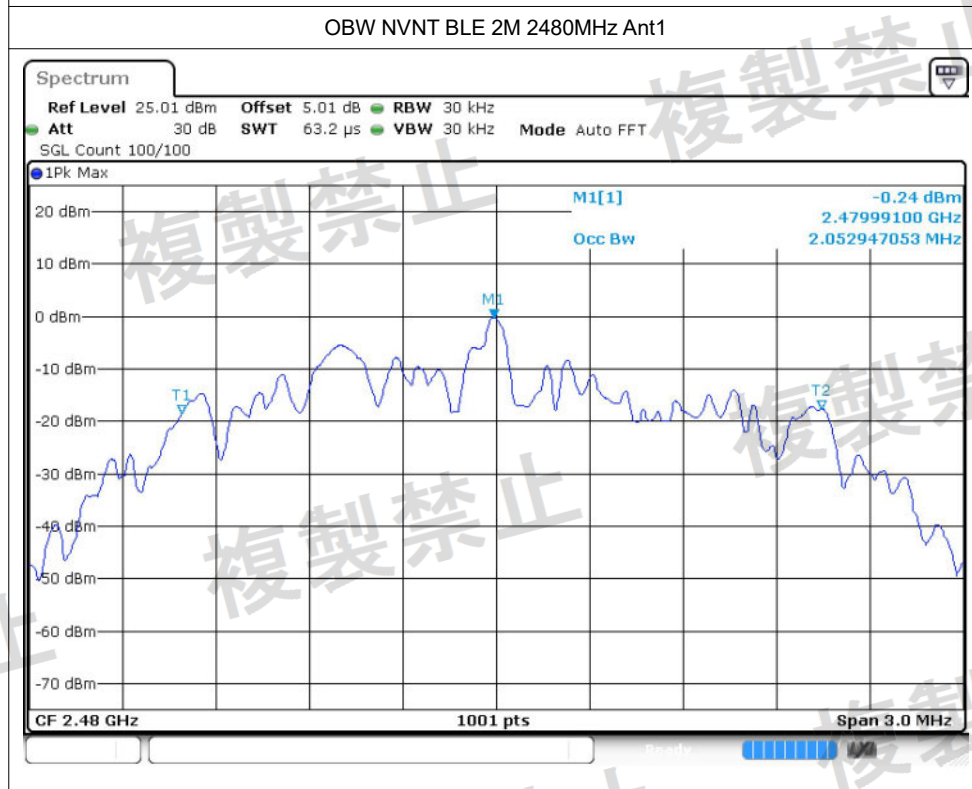
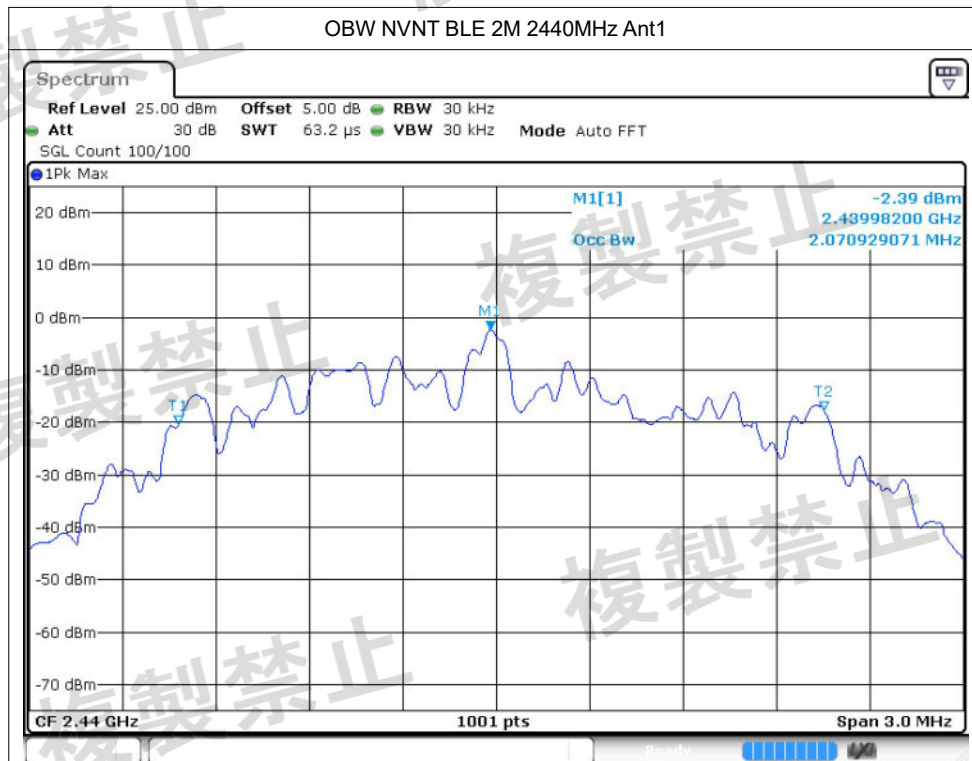


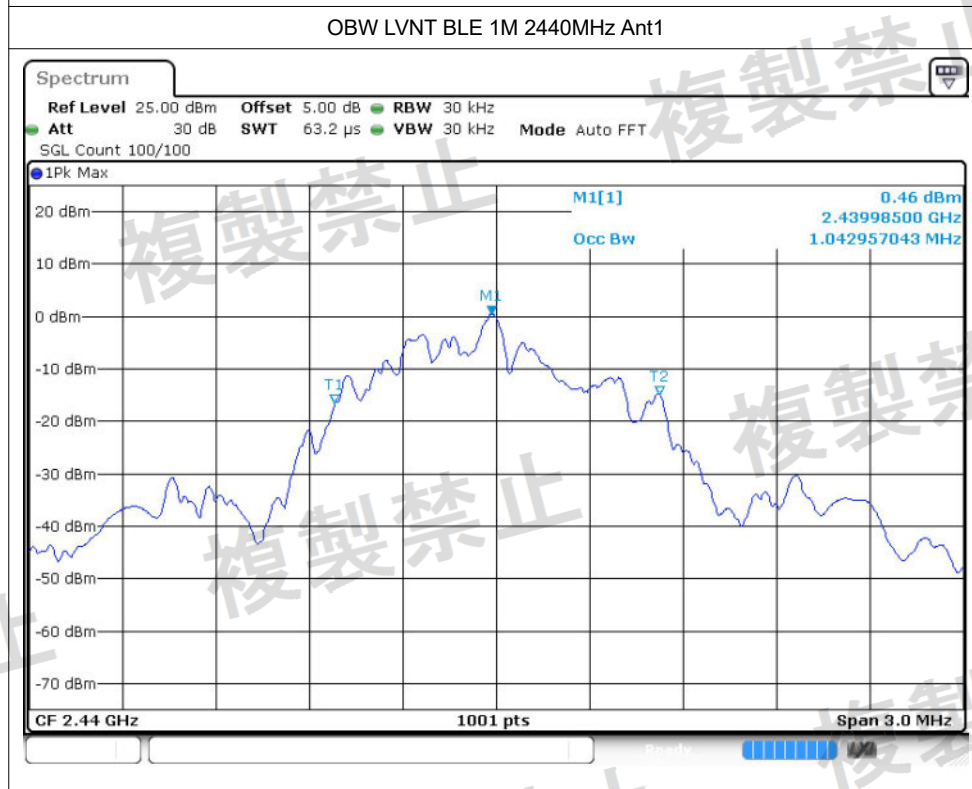
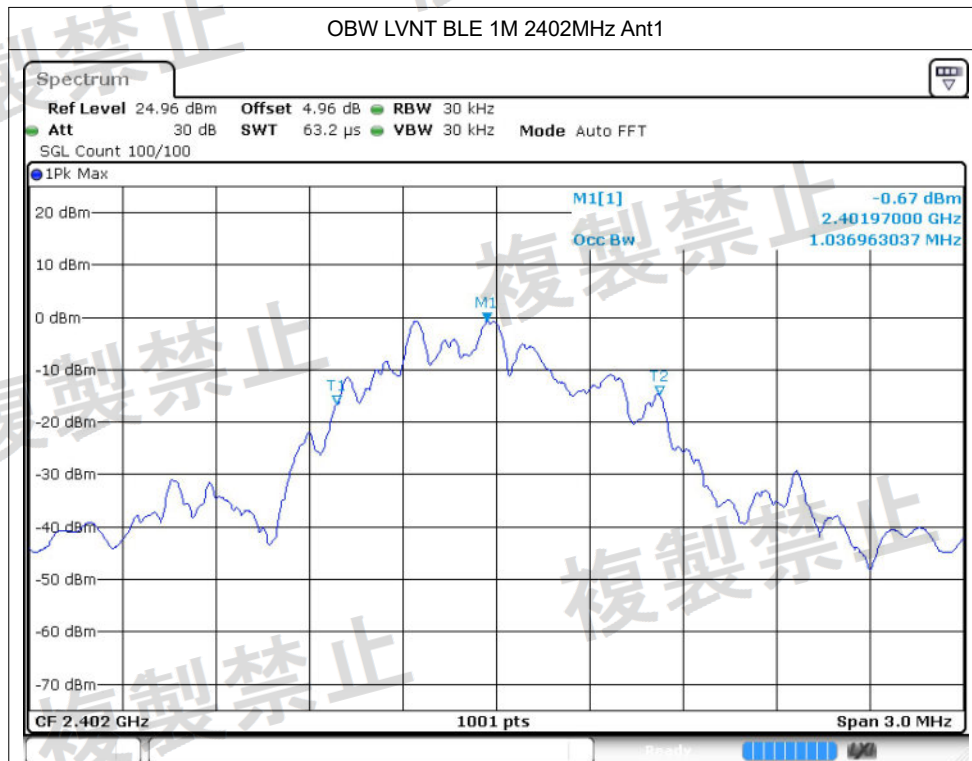


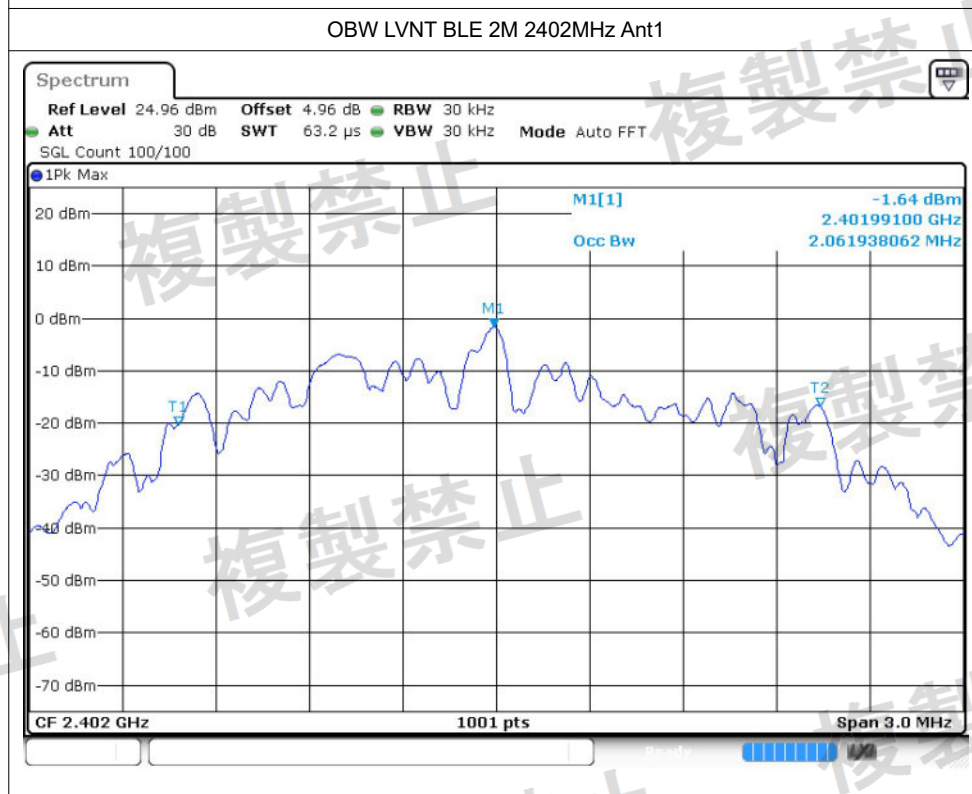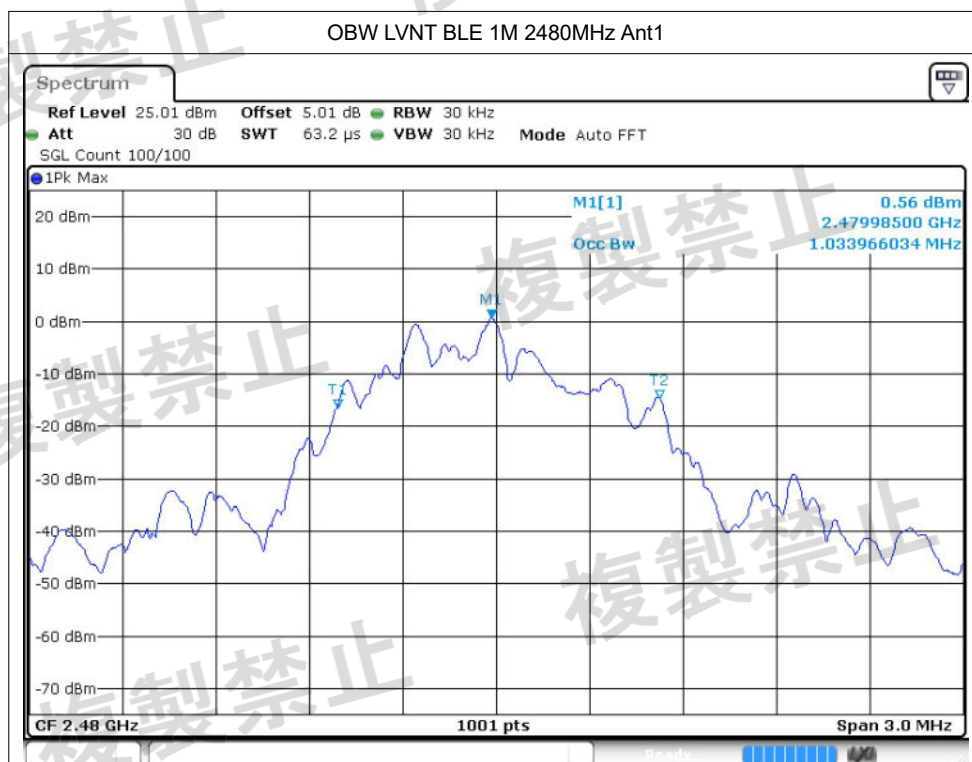

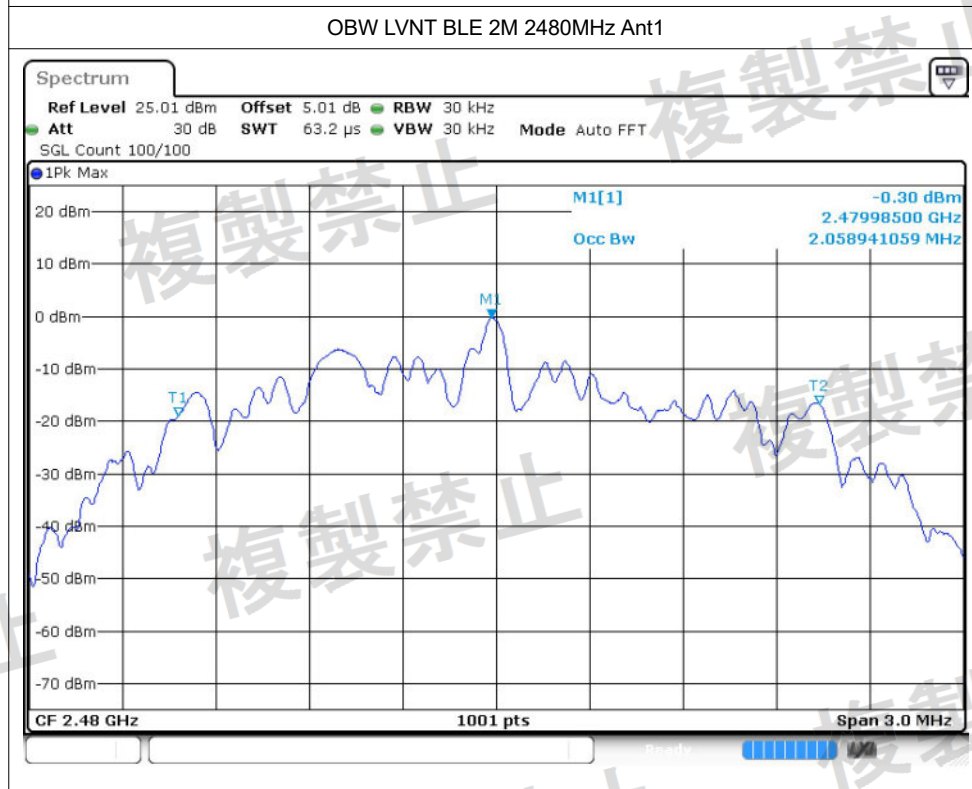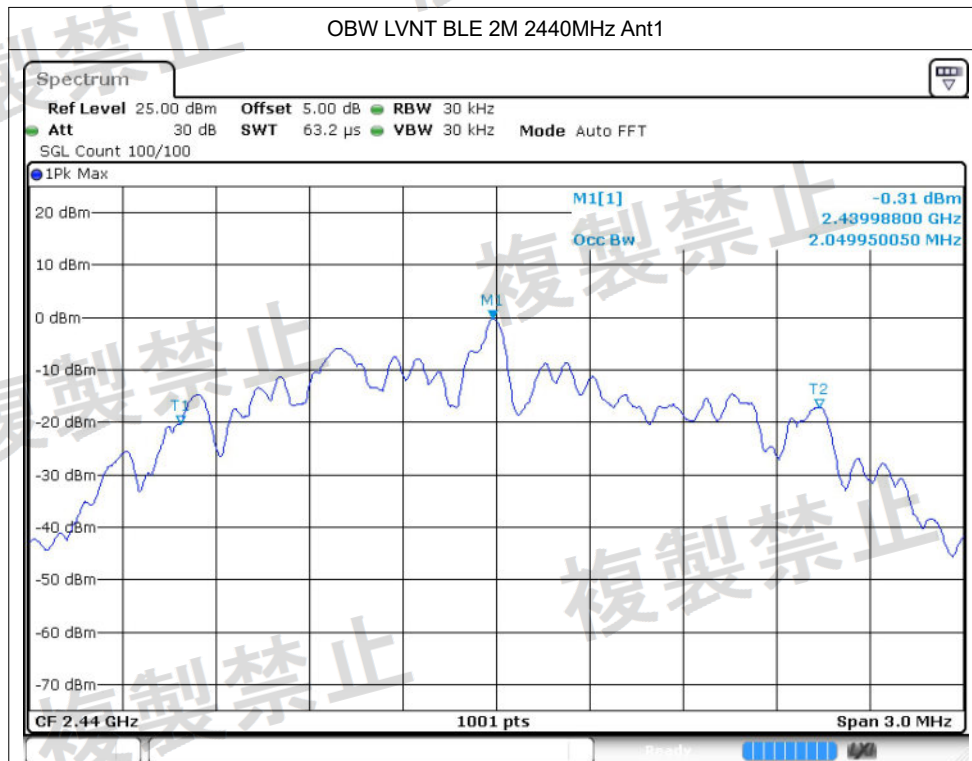

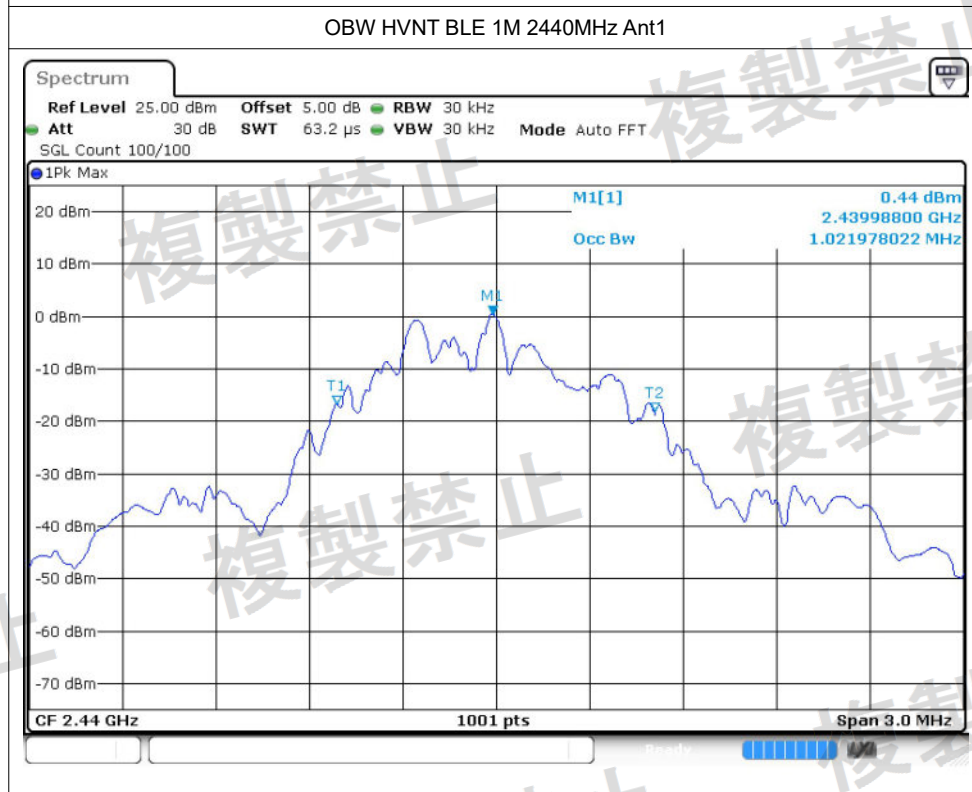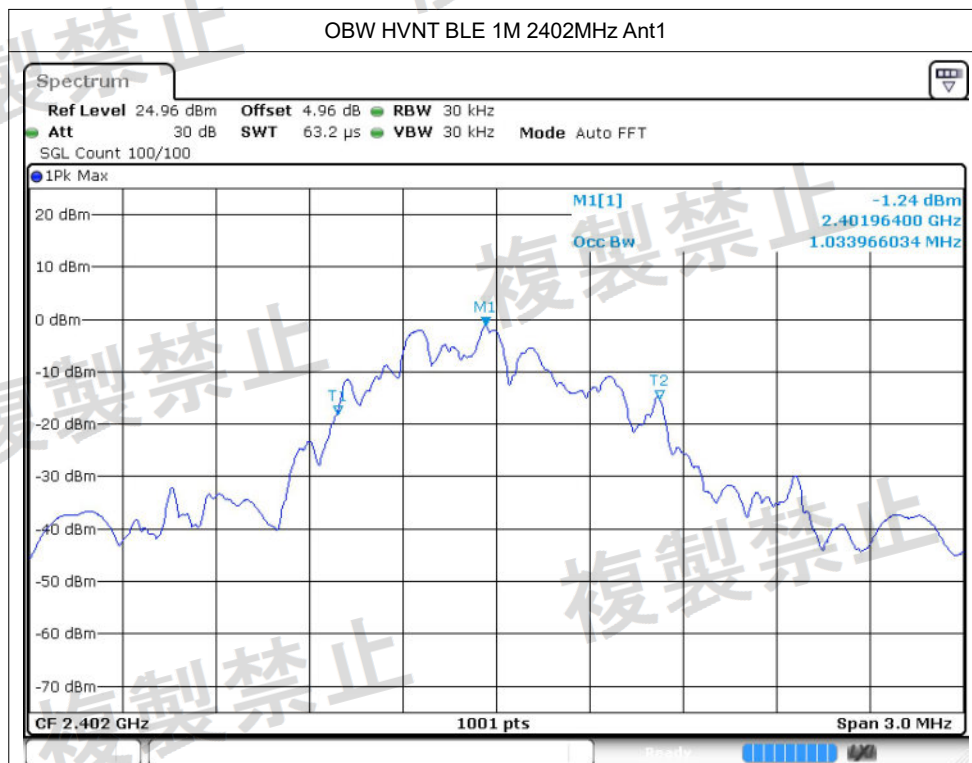


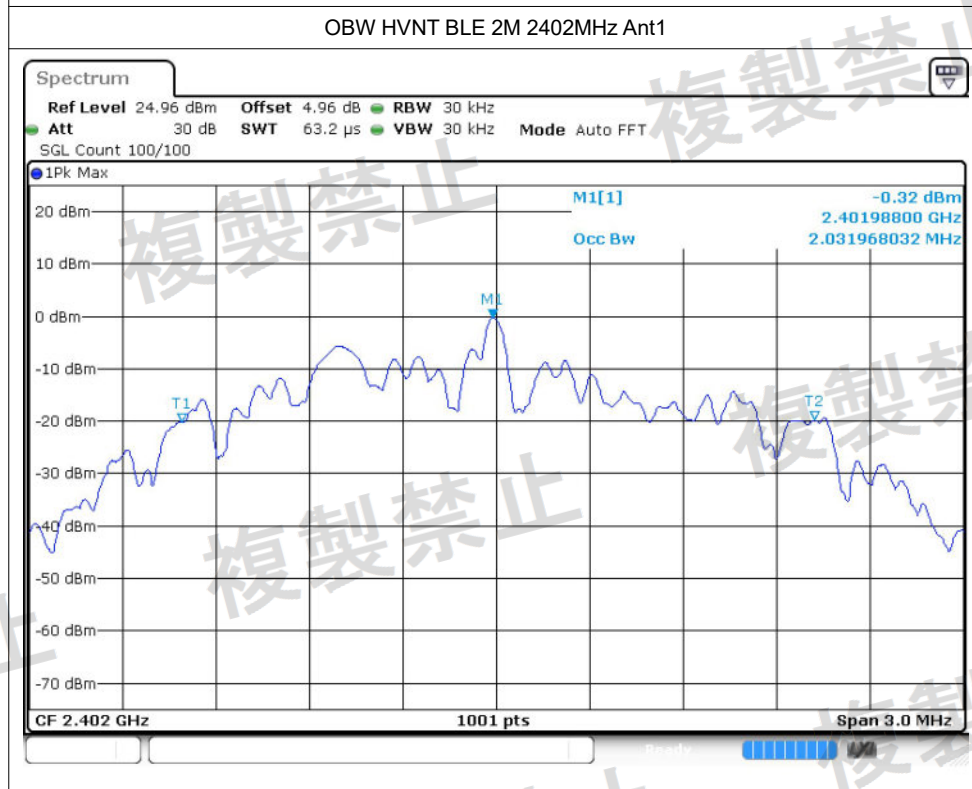
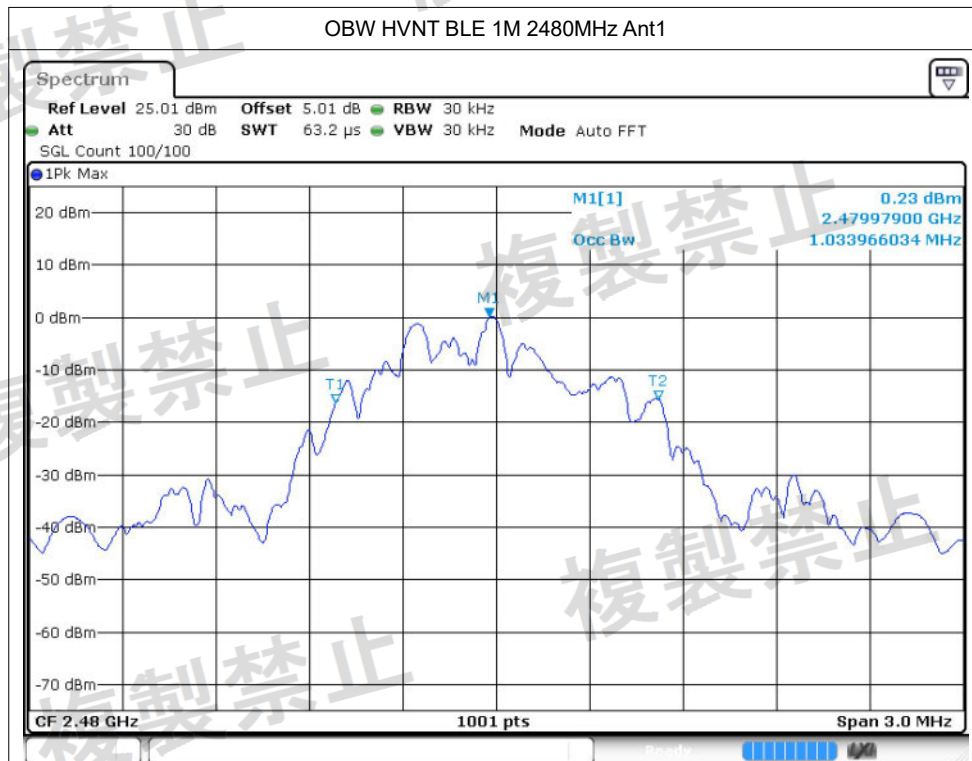


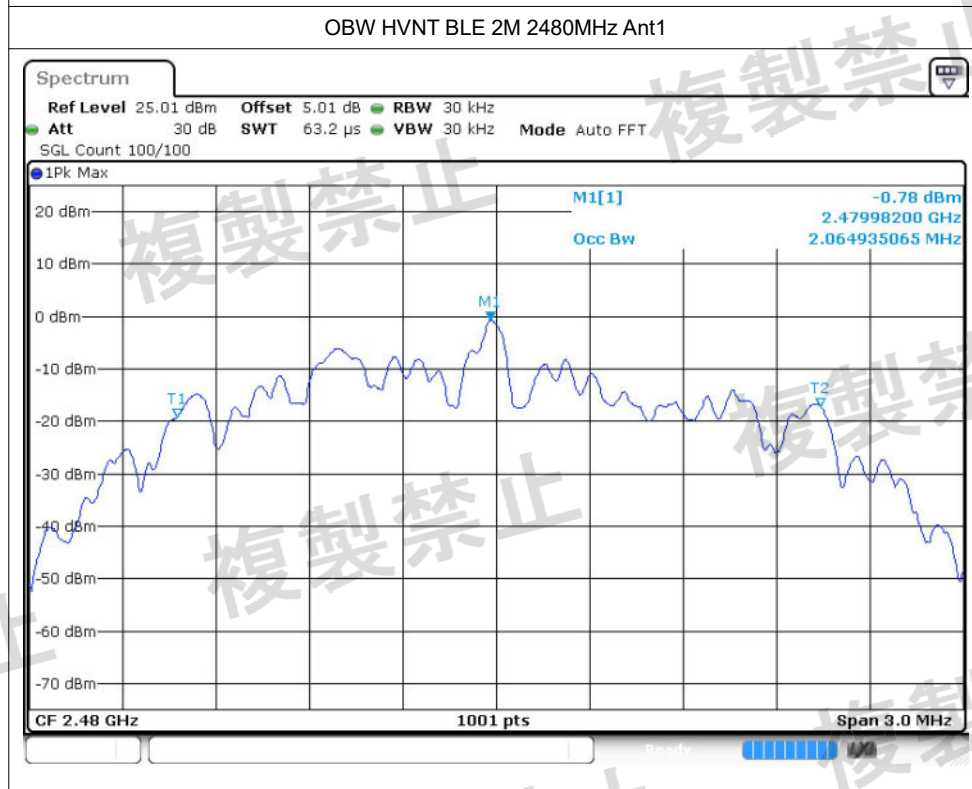
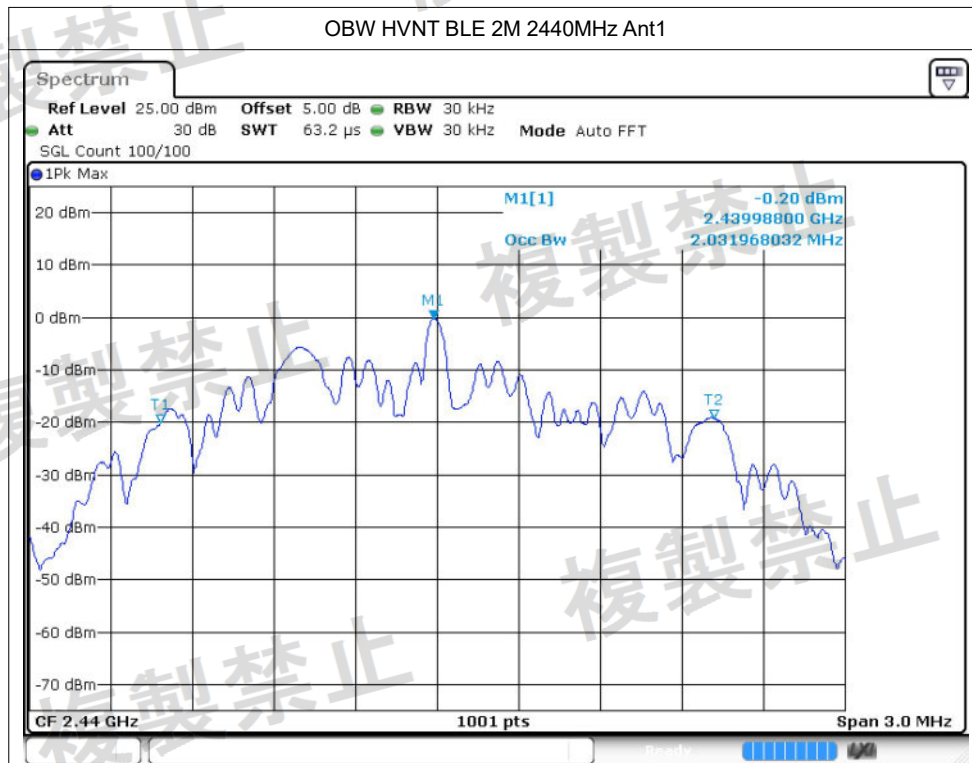




Spreading Bandwidth



Condition	Mode	Frequency (MHz)	Antenna	90% OBW (MHz)	Limit (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.629	0.5	Pass
	BLE 1M	2440	Ant1	0.608	0.5	Pass
	BLE 1M	2480	Ant1	0.641	0.5	Pass
	BLE 2M	2402	Ant1	1.262	0.5	Pass
	BLE 2M	2440	Ant1	1.262	0.5	Pass
	BLE 2M	2480	Ant1	1.253	0.5	Pass
LVNT	BLE 1M	2402	Ant1	0.641	0.5	Pass
	BLE 1M	2440	Ant1	0.623	0.5	Pass
	BLE 1M	2480	Ant1	0.629	0.5	Pass
	BLE 2M	2402	Ant1	1.262	0.5	Pass
	BLE 2M	2440	Ant1	1.292	0.5	Pass
	BLE 2M	2480	Ant1	1.259	0.5	Pass
HVNT	BLE 1M	2402	Ant1	0.611	0.5	Pass
	BLE 1M	2440	Ant1	0.632	0.5	Pass
	BLE 1M	2480	Ant1	0.644	0.5	Pass
	BLE 2M	2402	Ant1	1.28	0.5	Pass
	BLE 2M	2440	Ant1	1.163	0.5	Pass
	BLE 2M	2480	Ant1	1.286	0.5	Pass


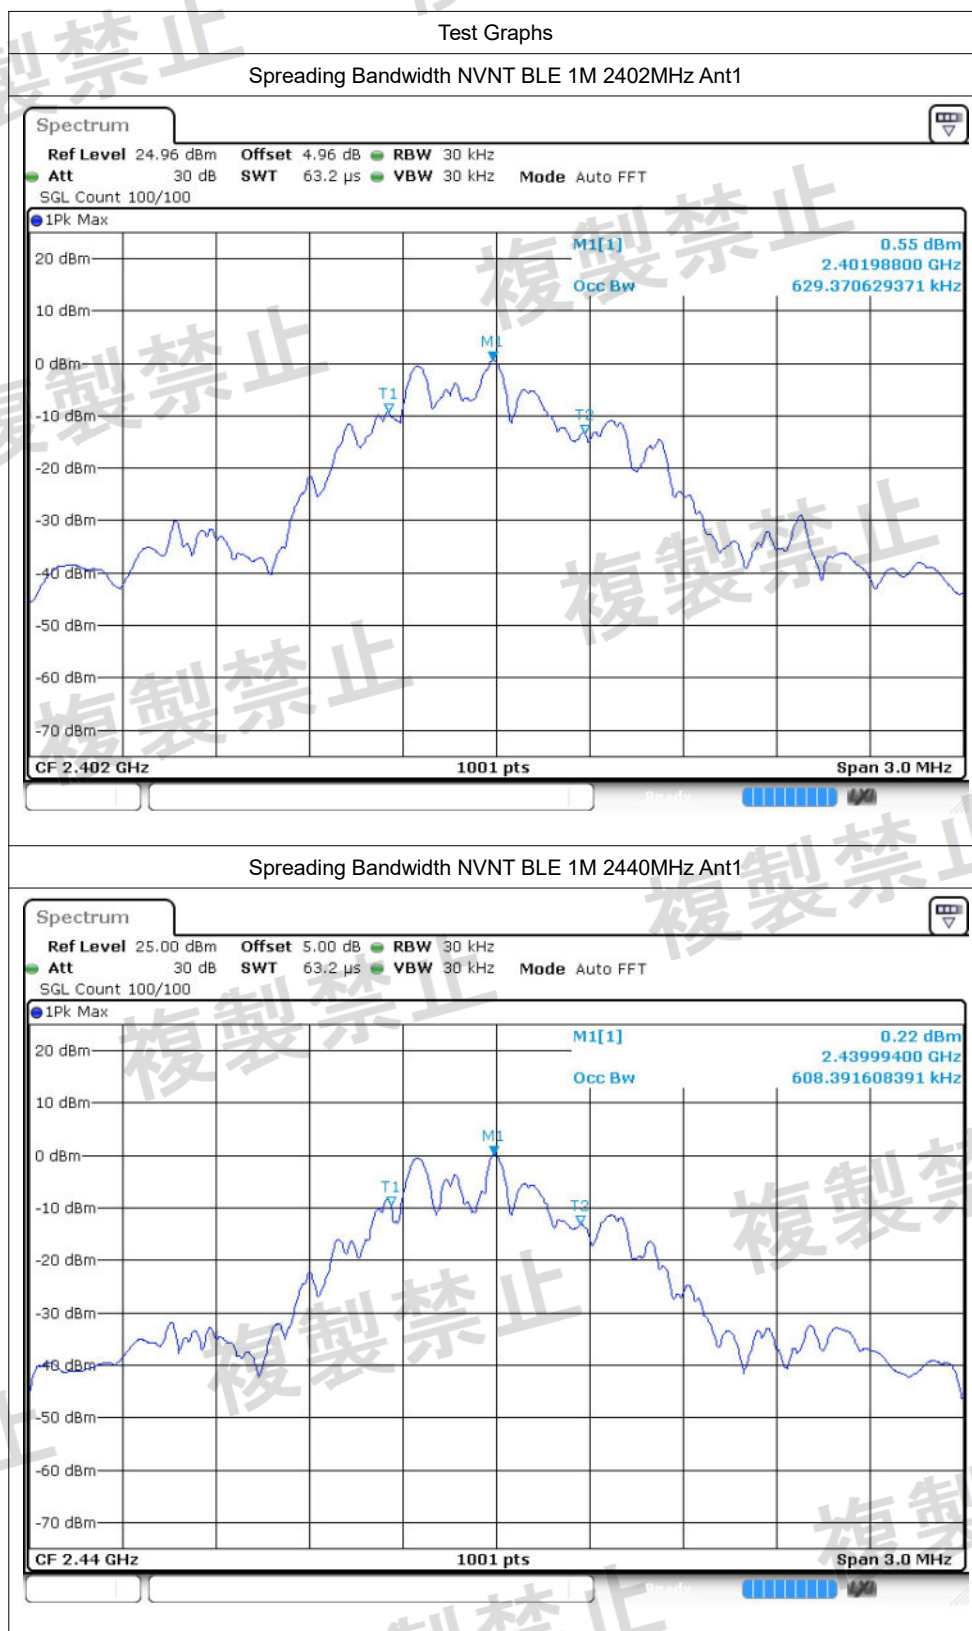


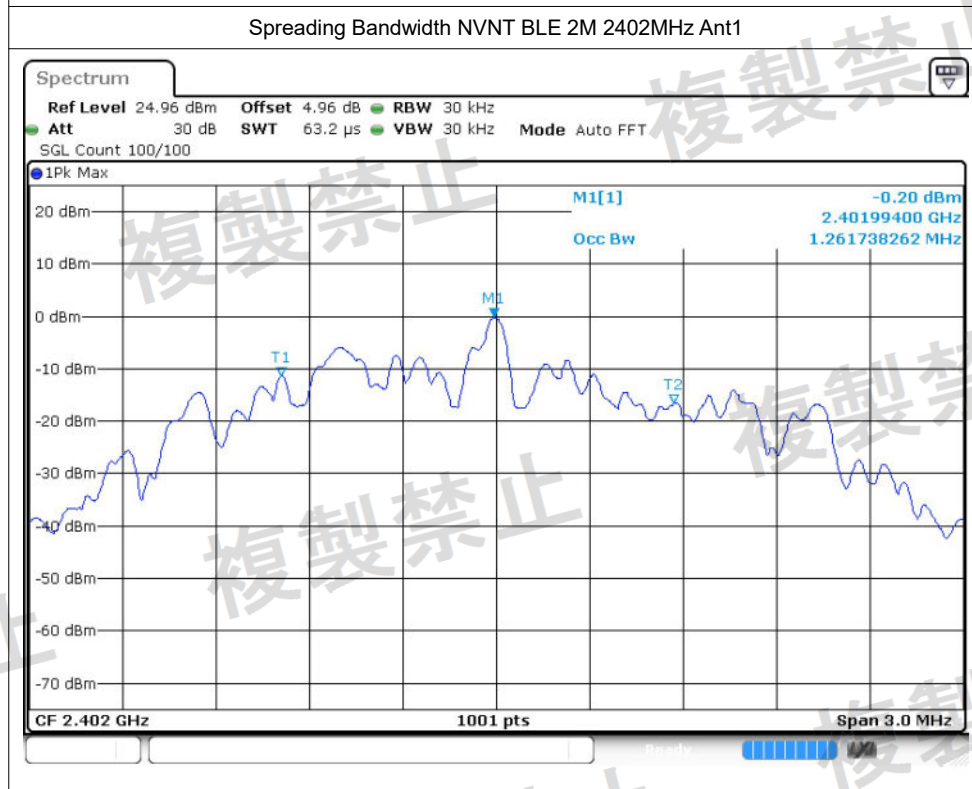
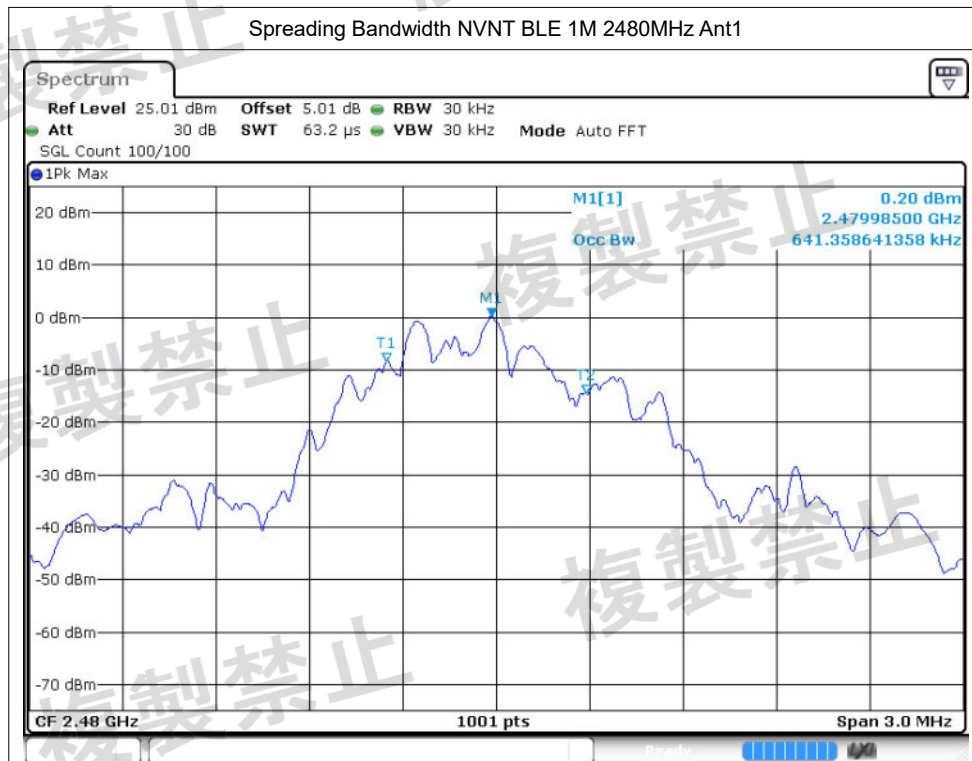


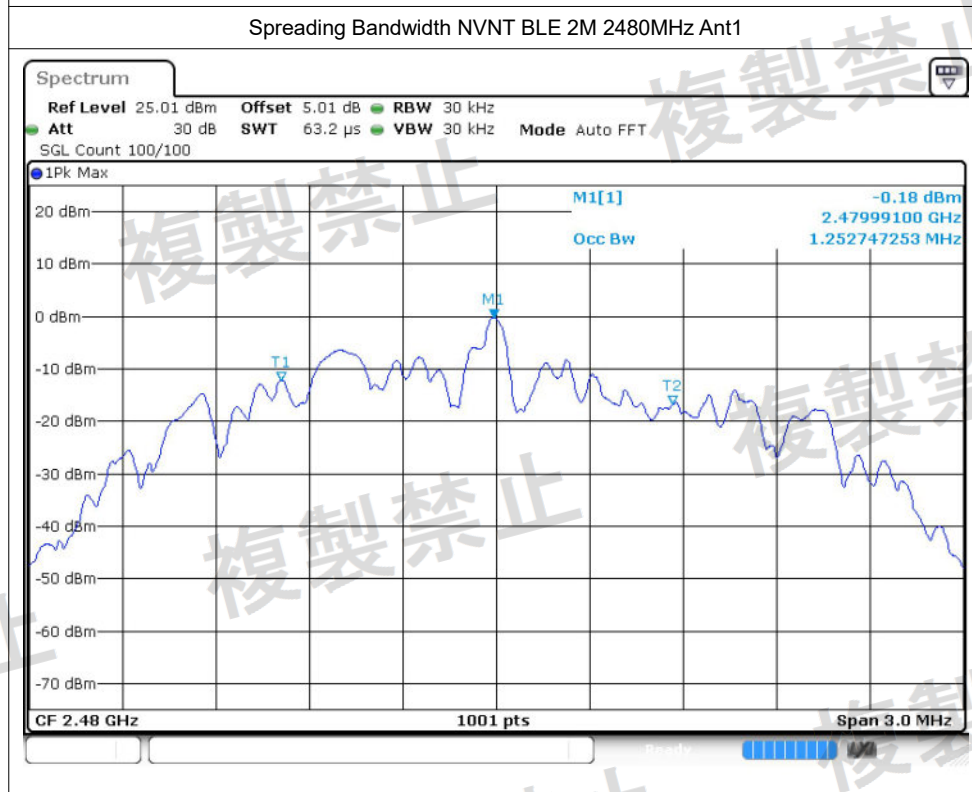
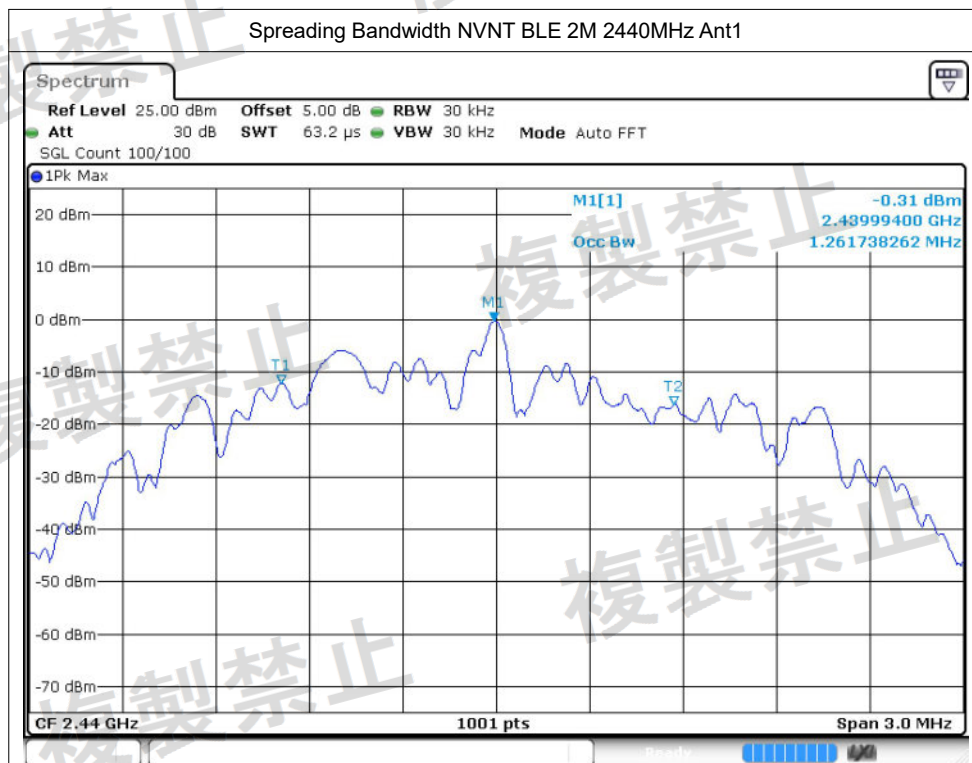


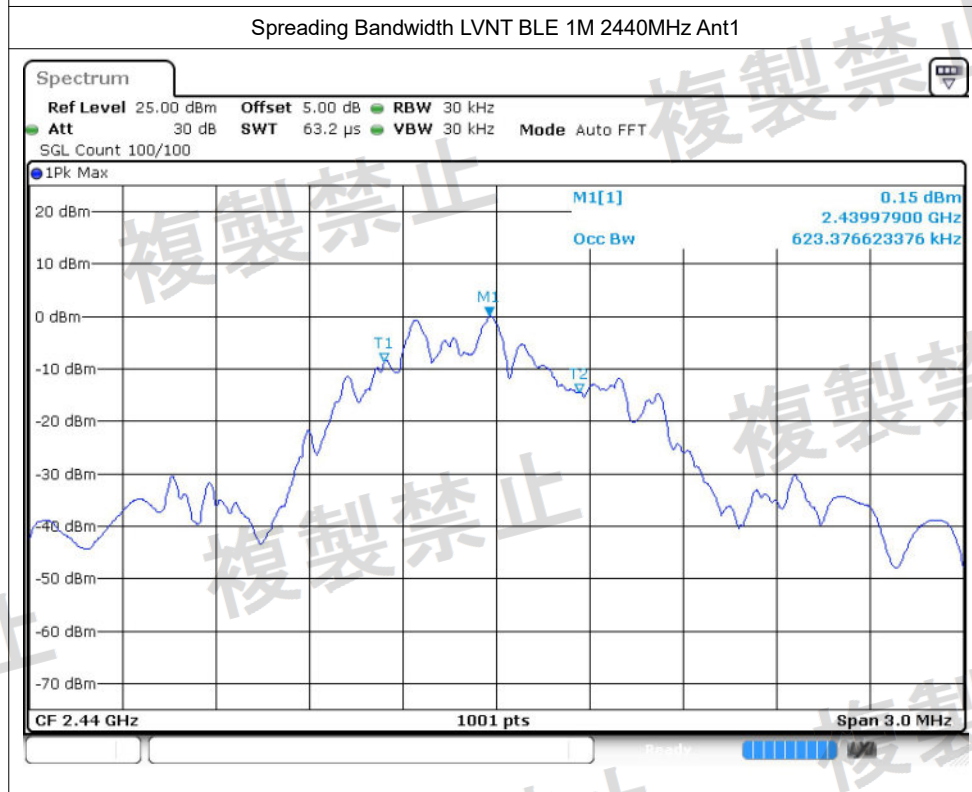
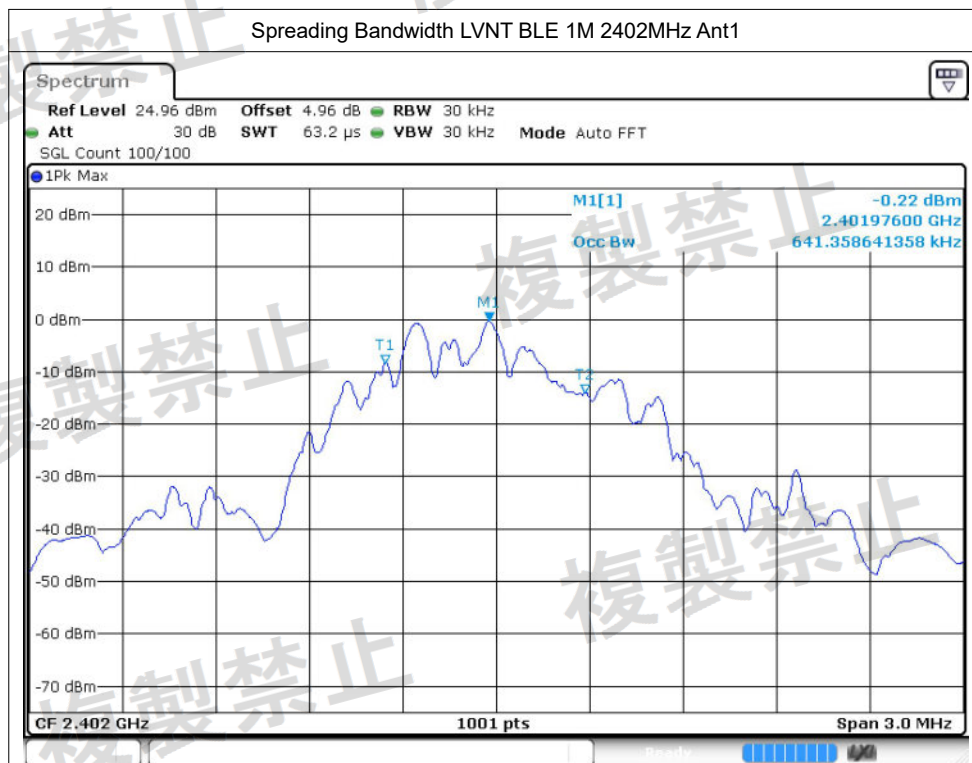


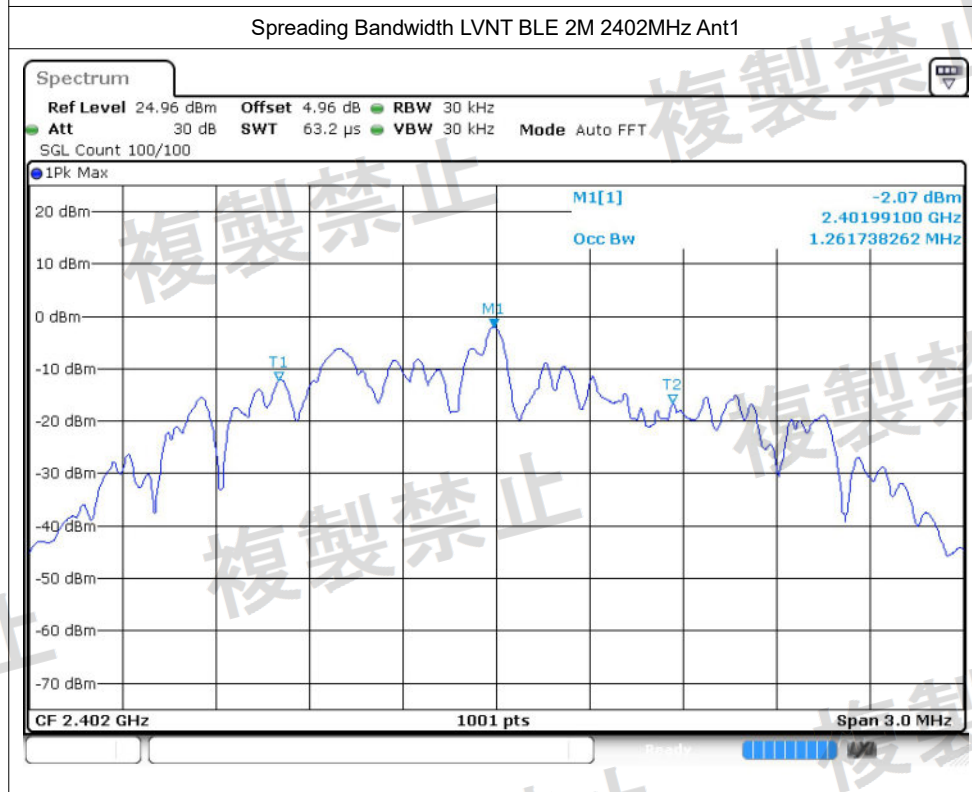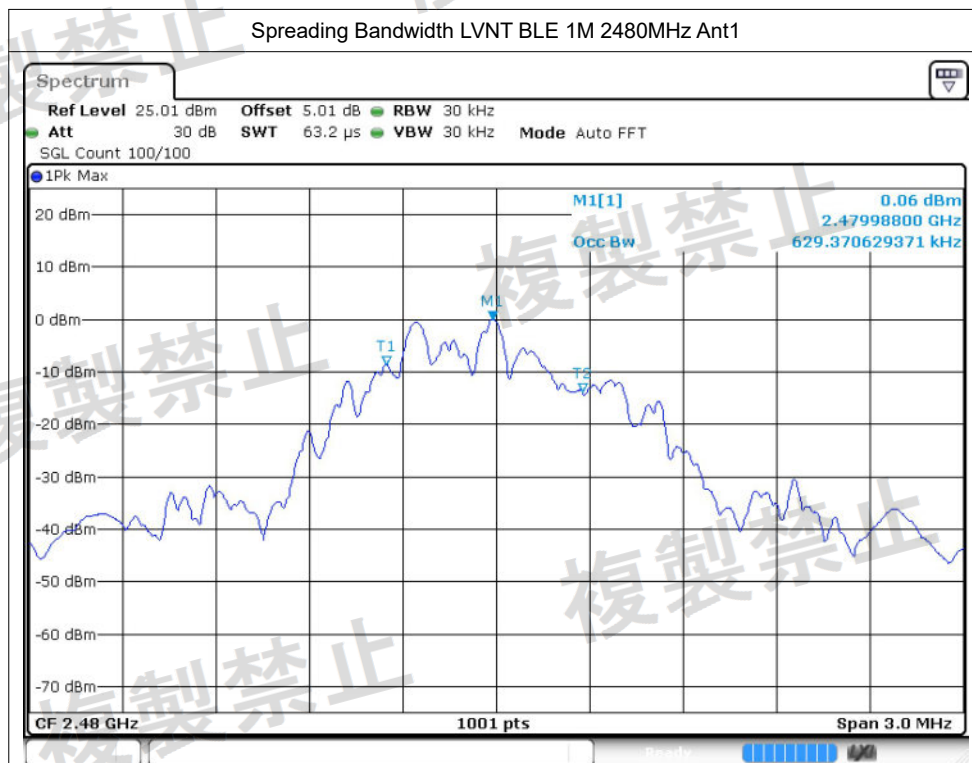

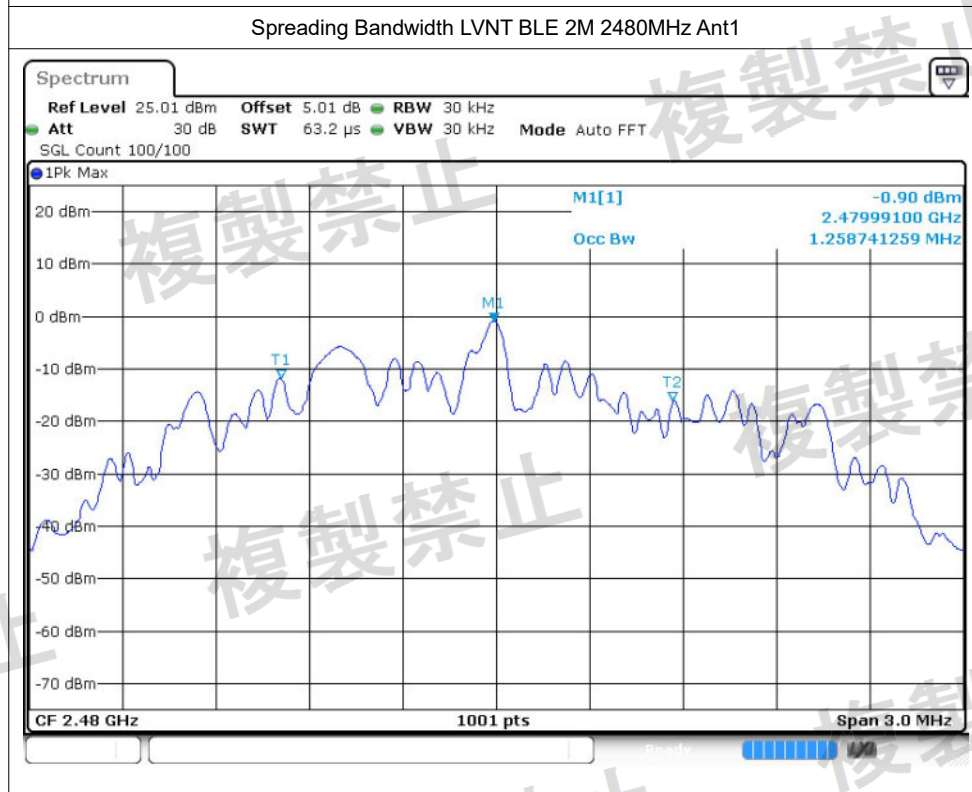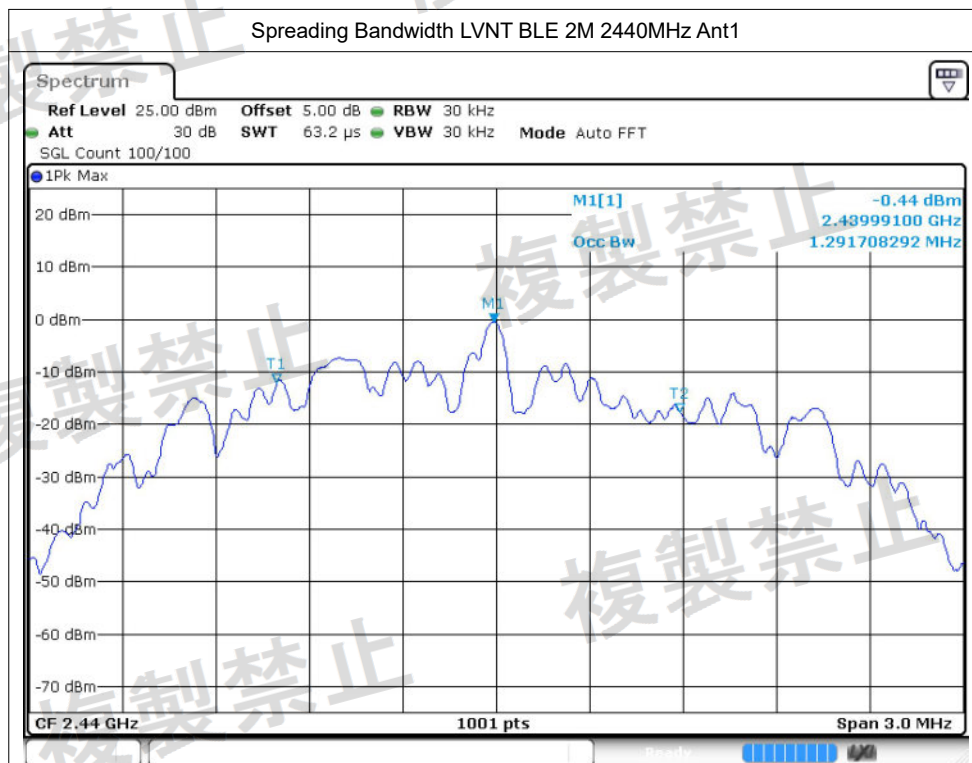

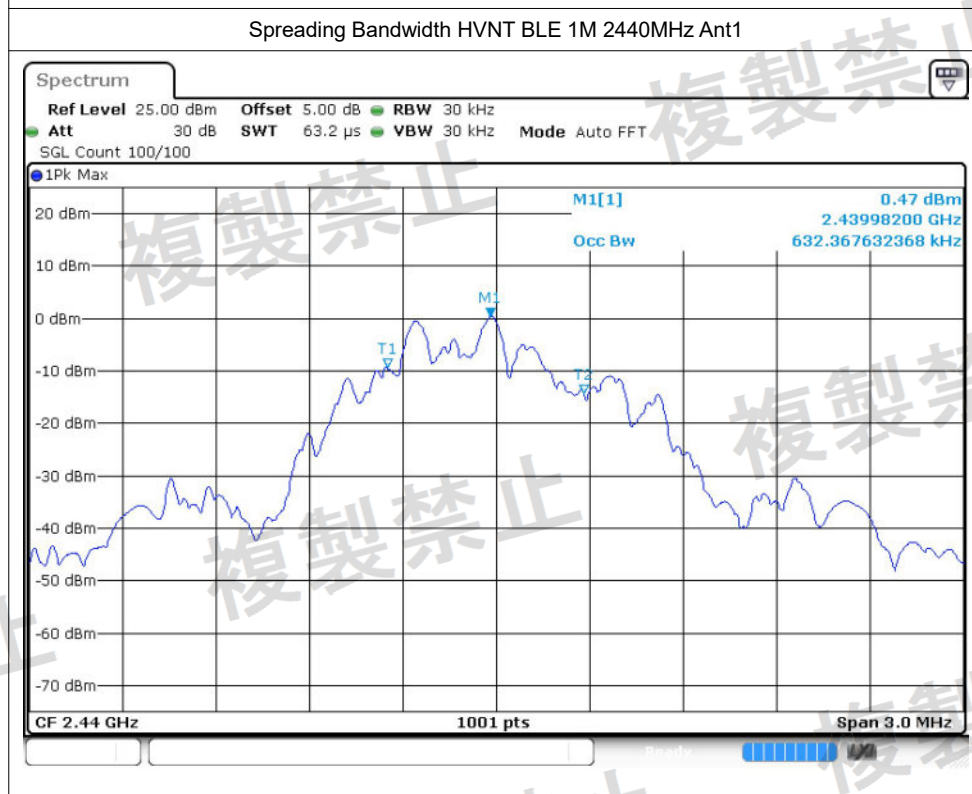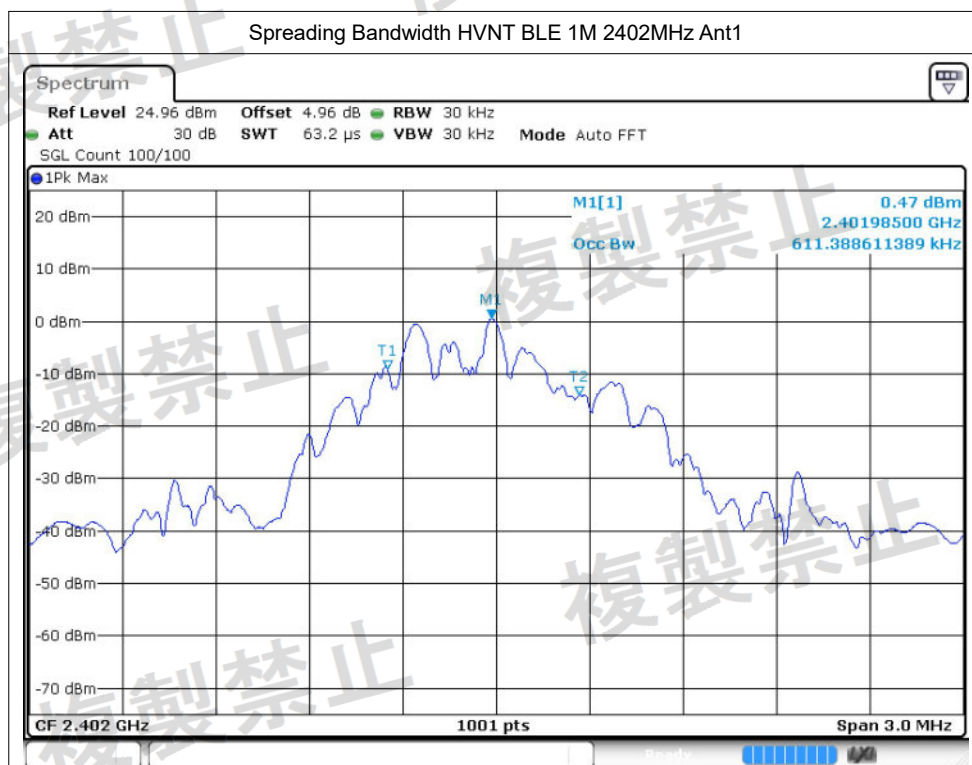

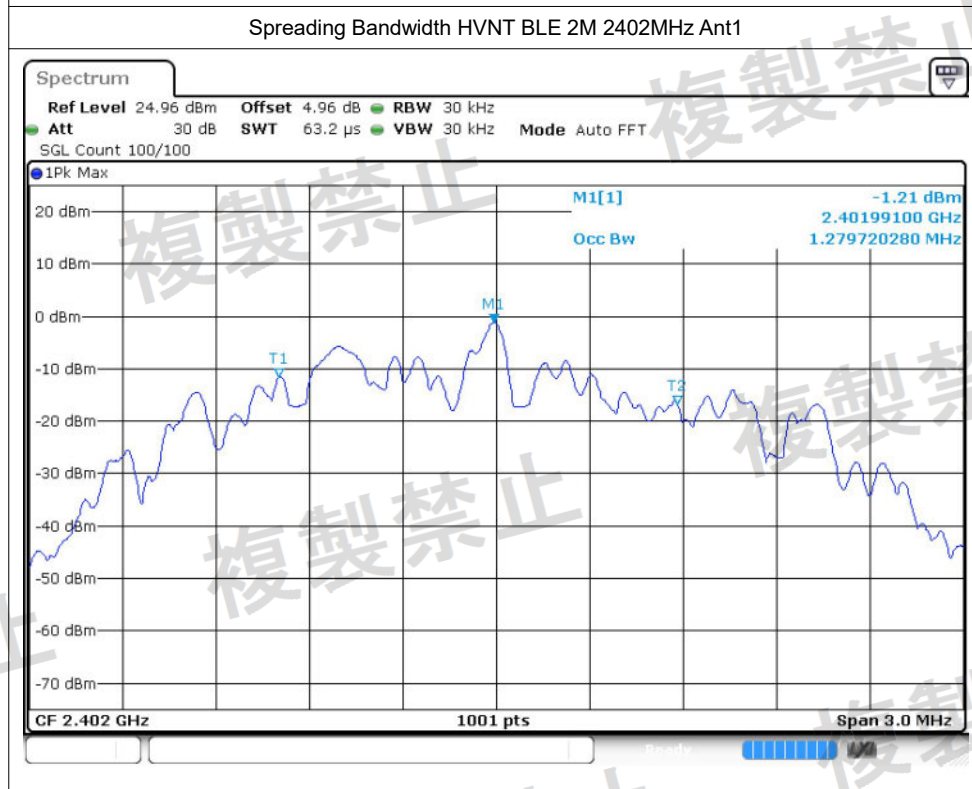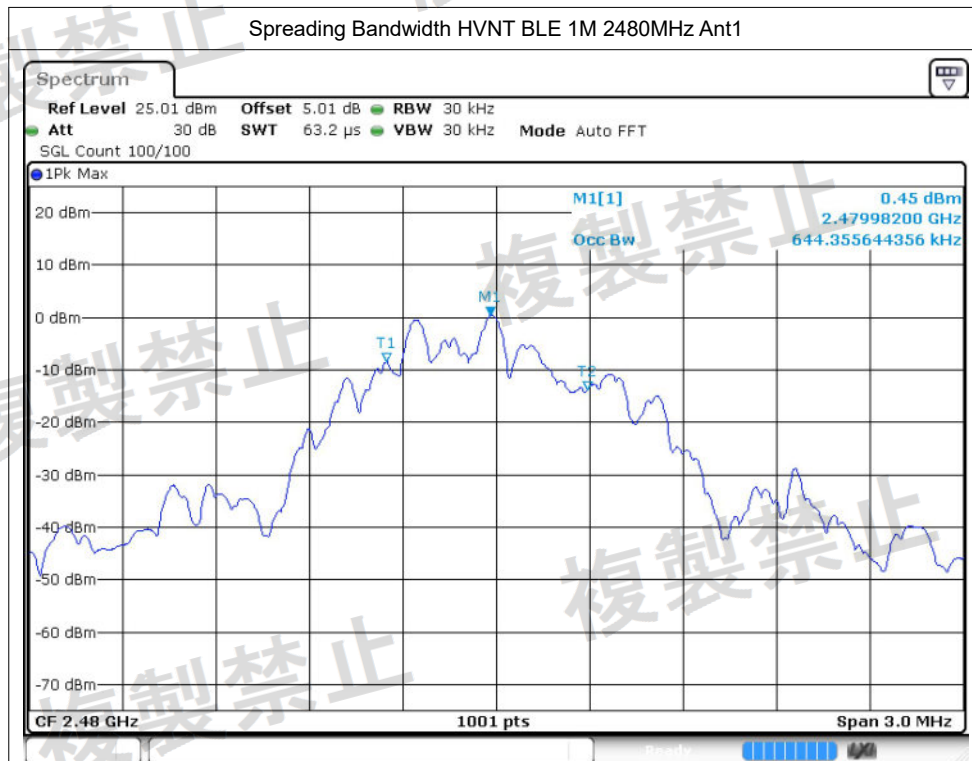

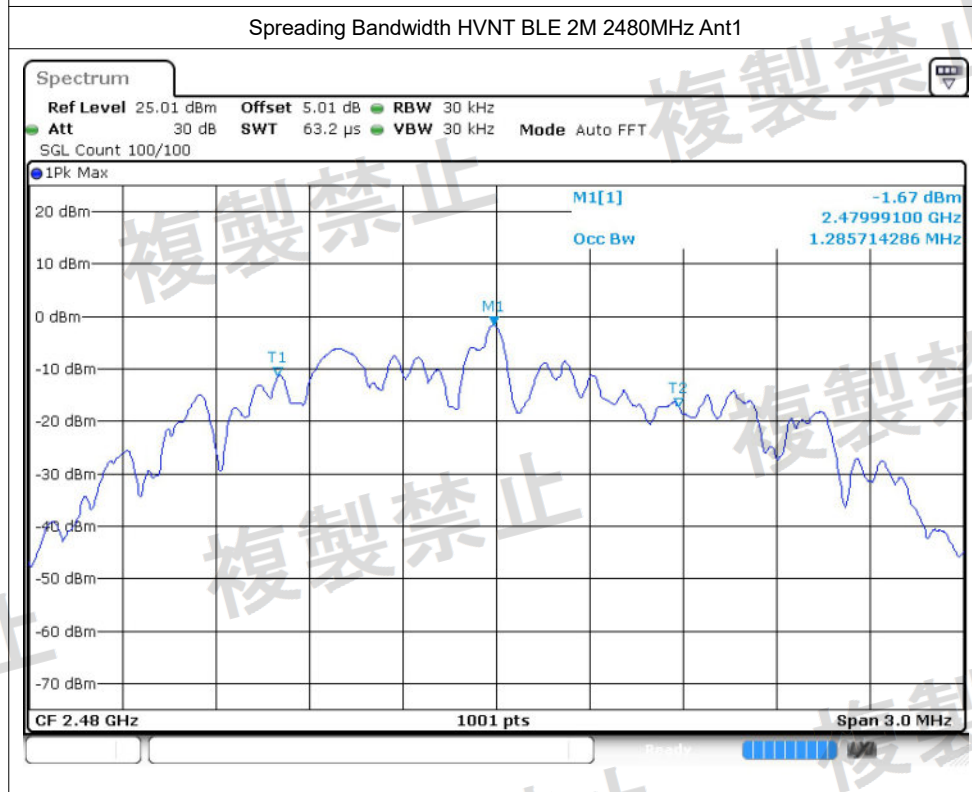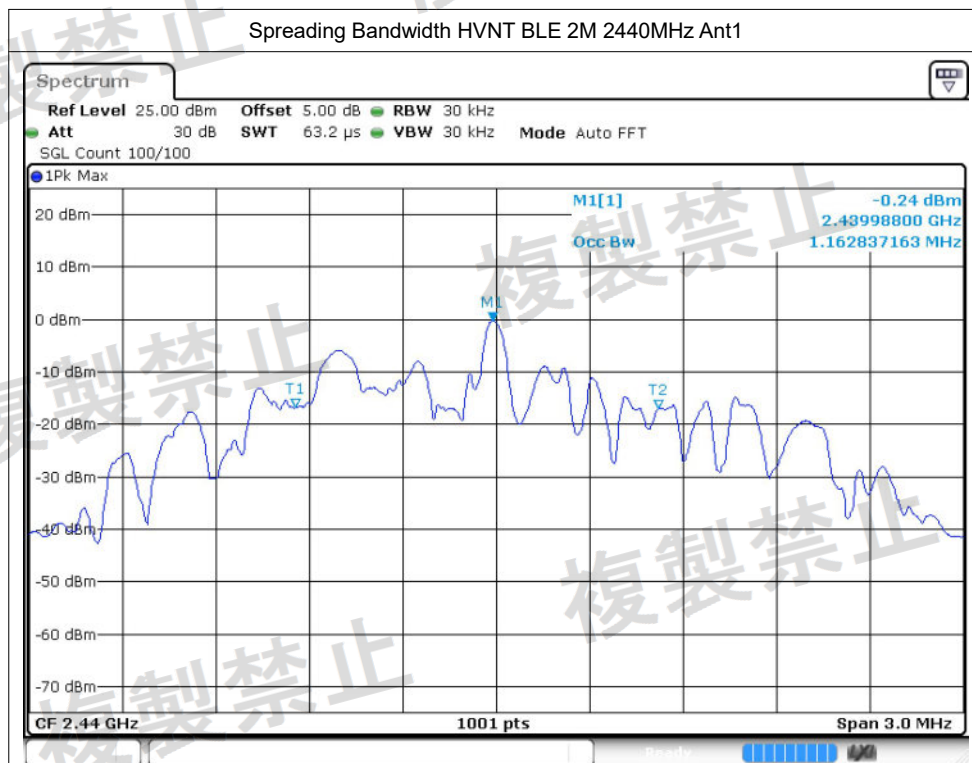

Tx Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Range (MHz)	Emission Frequency (MHz)	Max Peak Value (dBm)	Max RMS Value (dBm)	Max Peak Value (uW)	Max RMS Value (uW)	Limit Start(uW)	Limit Stop (uW)	Verdict
NVNT	BLE 1M	2402	Ant1	30-1000	789.70	-52.17	NA	0.0061	NA	2.5	2.5	Pass
	BLE 1M	2402	Ant1	1000-2387	2386.58	-52.52	NA	0.0056	NA	2.5	2.5	Pass
	BLE 1M	2402	Ant1	2387-2400	2400.00	-32.93	NA	0.5093	NA	25	25	Pass
	BLE 1M	2402	Ant1	2483.5-2496.5	2489.62	-54.87	NA	0.0033	NA	25	25	Pass
	BLE 1M	2402	Ant1	2496.5-13000	10578.94	-44.44	NA	0.036	NA	2.5	2.5	Pass
	BLE 1M	2440	Ant1	30-1000	963.72	-52.23	NA	0.006	NA	2.5	2.5	Pass
	BLE 1M	2440	Ant1	1000-2387	2179.92	-53.03	NA	0.005	NA	2.5	2.5	Pass
	BLE 1M	2440	Ant1	2387-2400	2393.91	-55.32	NA	0.0029	NA	25	25	Pass
	BLE 1M	2440	Ant1	2483.5-2496.5	2489.16	-54.81	NA	0.0033	NA	25	25	Pass
	BLE 1M	2440	Ant1	2496.5-13000	12634.48	-44.25	NA	0.0376	NA	2.5	2.5	Pass
	BLE 1M	2480	Ant1	30-1000	862.16	-52.12	NA	0.0061	NA	2.5	2.5	Pass
	BLE 1M	2480	Ant1	1000-2387	2291.85	-52.72	NA	0.0053	NA	2.5	2.5	Pass
	BLE 1M	2480	Ant1	2387-2400	2389.66	-54.96	NA	0.0032	NA	25	25	Pass
	BLE 1M	2480	Ant1	2483.5-2496.5	2483.72	-45.04	NA	0.0313	NA	25	25	Pass
	BLE 1M	2480	Ant1	2496.5-13000	6973.09	-44.66	NA	0.0342	NA	2.5	2.5	Pass
	BLE 2M	2402	Ant1	30-1000	891.46	-51.75	NA	0.0067	NA	2.5	2.5	Pass
	BLE 2M	2402	Ant1	1000-2387	2386.58	-50.07	NA	0.0098	NA	2.5	2.5	Pass
	BLE 2M	2402	Ant1	2387-2400	2400.00	-17.78	-32.33	16.6725	0.5848	25	25	Pass
	BLE 2M	2402	Ant1	2483.5-2496.5	2493.60	-53.98	NA	0.004	NA	25	25	Pass



	BLE 2M	2402	Ant1	2496.5-13000	11245.92	-42.80	NA	0.0525	NA	2.5	2.5	Pass
	BLE 2M	2440	Ant1	30-1000	904.75	-51.92	NA	0.0064	NA	2.5	2.5	Pass
	BLE 2M	2440	Ant1	1000-2387	2080.06	-53.01	NA	0.005	NA	2.5	2.5	Pass
	BLE 2M	2440	Ant1	2387-2400	2399.67	-55.37	NA	0.0029	NA	25	25	Pass
	BLE 2M	2440	Ant1	2483.5-2496.5	2484.15	-54.94	NA	0.0032	NA	25	25	Pass
	BLE 2M	2440	Ant1	2496.5-13000	11203.90	-44.40	NA	0.0363	NA	2.5	2.5	Pass
	BLE 2M	2480	Ant1	30-1000	848.58	-52.13	NA	0.0061	NA	2.5	2.5	Pass
	BLE 2M	2480	Ant1	1000-2387	2133.46	-51.64	NA	0.0069	NA	2.5	2.5	Pass
	BLE 2M	2480	Ant1	2387-2400	2399.85	-54.51	NA	0.0035	NA	25	25	Pass
	BLE 2M	2480	Ant1	2483.5-2496.5	2483.50	-39.92	NA	0.1019	NA	25	25	Pass
LVNT	BLE 2M	2480	Ant1	2496.5-13000	10269.09	-44.67	NA	0.0341	NA	2.5	2.5	Pass
	BLE 1M	2402	Ant1	30-1000	883.79	-51.80	NA	0.0066	NA	2.5	2.5	Pass
	BLE 1M	2402	Ant1	1000-2387	2386.45	-51.28	NA	0.0074	NA	2.5	2.5	Pass
	BLE 1M	2402	Ant1	2387-2400	2400.00	-34.93	NA	0.3214	NA	25	25	Pass
	BLE 1M	2402	Ant1	2483.5-2496.5	2493.31	-54.52	NA	0.0035	NA	25	25	Pass
	BLE 1M	2402	Ant1	2496.5-13000	11214.41	-44.84	NA	0.0328	NA	2.5	2.5	Pass
	BLE 1M	2440	Ant1	30-1000	810.17	-52.11	NA	0.0062	NA	2.5	2.5	Pass
	BLE 1M	2440	Ant1	1000-2387	2120.97	-52.62	NA	0.0055	NA	2.5	2.5	Pass
	BLE 1M	2440	Ant1	2387-2400	2388.60	-52.50	NA	0.0056	NA	25	25	Pass
	BLE 1M	2440	Ant1	2483.5-2496.5	2489.12	-53.81	NA	0.0042	NA	25	25	Pass
	BLE 1M	2440	Ant1	2496.5-13000	12255.30	-44.20	NA	0.038	NA	2.5	2.5	Pass
	BLE 1M	2480	Ant1	30-1000	712.01	-51.88	NA	0.0065	NA	2.5	2.5	Pass




	BLE 1M	2480	Ant1	1000-2387	1945.93	-53.15	NA	0.0048	NA	2.5	2.5	Pass
	BLE 1M	2480	Ant1	2387-2400	2393.96	-55.11	NA	0.0031	NA	25	25	Pass
	BLE 1M	2480	Ant1	2483.5-2496.5	2483.73	-45.09	NA	0.031	NA	25	25	Pass
	BLE 1M	2480	Ant1	2496.5-13000	12615.57	-44.55	NA	0.0351	NA	2.5	2.5	Pass
	BLE 2M	2402	Ant1	30-1000	884.18	-52.05	NA	0.0062	NA	2.5	2.5	Pass
	BLE 2M	2402	Ant1	1000-2387	2385.89	-50.97	NA	0.008	NA	2.5	2.5	Pass
	BLE 2M	2402	Ant1	2387-2400	2400.00	-18.44	-32.33	14.3219	0.5848	25	25	Pass
	BLE 2M	2402	Ant1	2483.5-2496.5	2494.87	-54.05	NA	0.0039	NA	25	25	Pass
	BLE 2M	2402	Ant1	2496.5-13000	12980.04	-44.78	NA	0.0333	NA	2.5	2.5	Pass
	BLE 2M	2440	Ant1	30-1000	915.71	-52.44	NA	0.0057	NA	2.5	2.5	Pass
	BLE 2M	2440	Ant1	1000-2387	1487.95	-52.66	NA	0.0054	NA	2.5	2.5	Pass
	BLE 2M	2440	Ant1	2387-2400	2388.04	-54.71	NA	0.0034	NA	25	25	Pass
	BLE 2M	2440	Ant1	2483.5-2496.5	2494.61	-54.71	NA	0.0034	NA	25	25	Pass
	BLE 2M	2440	Ant1	2496.5-13000	10661.92	-44.60	NA	0.0347	NA	2.5	2.5	Pass
	BLE 2M	2480	Ant1	30-1000	754.40	-51.86	NA	0.0065	NA	2.5	2.5	Pass
	BLE 2M	2480	Ant1	1000-2387	1665.48	-52.88	NA	0.0052	NA	2.5	2.5	Pass
	BLE 2M	2480	Ant1	2387-2400	2399.51	-55.30	NA	0.003	NA	25	25	Pass
	BLE 2M	2480	Ant1	2483.5-2496.5	2484.10	-44.92	NA	0.0322	NA	25	25	Pass
	BLE 2M	2480	Ant1	2496.5-13000	6983.60	-45.22	NA	0.0301	NA	2.5	2.5	Pass
HVNT	BLE 1M	2402	Ant1	30-1000	938.89	-52.39	NA	0.0058	NA	2.5	2.5	Pass
	BLE 1M	2402	Ant1	1000-2387	2387.00	-50.88	NA	0.0082	NA	2.5	2.5	Pass
	BLE 1M	2402	Ant1	2387-2400	2400.00	-27.85	NA	1.6406	NA	25	25	Pass

BLE 1M	2402	Ant1	2483.5-2496.5	2488.52	-53.04	NA	0.005	NA	25	25	Pass
BLE 1M	2402	Ant1	2496.5-13000	11234.36	-44.41	NA	0.0362	NA	2.5	2.5	Pass
BLE 1M	2440	Ant1	30-1000	870.41	-52.33	NA	0.0058	NA	2.5	2.5	Pass
BLE 1M	2440	Ant1	1000-2387	1292.52	-52.83	NA	0.0052	NA	2.5	2.5	Pass
BLE 1M	2440	Ant1	2387-2400	2392.08	-55.43	NA	0.0029	NA	25	25	Pass
BLE 1M	2440	Ant1	2483.5-2496.5	2487.38	-54.33	NA	0.0037	NA	25	25	Pass
BLE 1M	2440	Ant1	2496.5-13000	10601.00	-44.22	NA	0.0378	NA	2.5	2.5	Pass
BLE 1M	2480	Ant1	30-1000	870.21	-52.19	NA	0.006	NA	2.5	2.5	Pass
BLE 1M	2480	Ant1	1000-2387	1795.44	-53.33	NA	0.0046	NA	2.5	2.5	Pass
BLE 1M	2480	Ant1	2387-2400	2387.62	-53.95	NA	0.004	NA	25	25	Pass
BLE 1M	2480	Ant1	2483.5-2496.5	2483.50	-37.18	NA	0.1914	NA	25	25	Pass
BLE 1M	2480	Ant1	2496.5-13000	10245.98	-44.41	NA	0.0362	NA	2.5	2.5	Pass
BLE 2M	2402	Ant1	30-1000	945.00	-51.76	NA	0.0067	NA	2.5	2.5	Pass
BLE 2M	2402	Ant1	1000-2387	2385.75	-52.21	NA	0.006	NA	2.5	2.5	Pass
BLE 2M	2402	Ant1	2387-2400	2400.00	-17.61	-32.34	17.338	0.5834	25	25	Pass
BLE 2M	2402	Ant1	2483.5-2496.5	2495.99	-54.95	NA	0.0032	NA	25	25	Pass
BLE 2M	2402	Ant1	2496.5-13000	6985.70	-44.50	NA	0.0355	NA	2.5	2.5	Pass
BLE 2M	2440	Ant1	30-1000	830.25	-51.71	NA	0.0067	NA	2.5	2.5	Pass
BLE 2M	2440	Ant1	1000-2387	2152.04	-52.02	NA	0.0063	NA	2.5	2.5	Pass
BLE 2M	2440	Ant1	2387-2400	2387.72	-55.72	NA	0.0027	NA	25	25	Pass
BLE 2M	2440	Ant1	2483.5-2496.5	2488.04	-53.92	NA	0.0041	NA	25	25	Pass
BLE 2M	2440	Ant1	2496.5-13000	12564.10	-44.38	NA	0.0365	NA	2.5	2.5	Pass


BLE 2M	2480	Ant1	30-1000	845.77	-52.54	NA	0.0056	NA	2.5	2.5	Pass
BLE 2M	2480	Ant1	1000-2387	2138.31	-52.79	NA	0.0053	NA	2.5	2.5	Pass
BLE 2M	2480	Ant1	2387-2400	2390.04	-54.91	NA	0.0032	NA	25	25	Pass
BLE 2M	2480	Ant1	2483.5-2496.5	2483.50	-43.45	NA	0.0452	NA	25	25	Pass
BLE 2M	2480	Ant1	2496.5-13000	12664.94	-44.75	NA	0.0335	NA	2.5	2.5	Pass



Test Graphs



Tx. Spurious NVNT BLE 1M 2402MHz Ant1 @ 30MHz-1000MHz


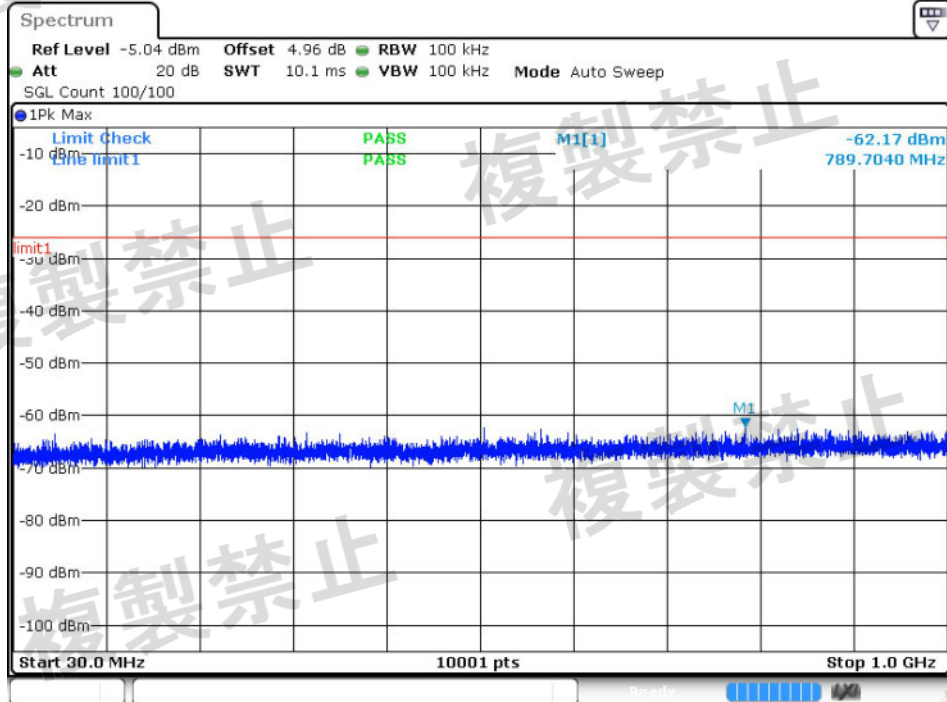




Tx. Spurious NVNT BLE 1M 2402MHz Ant1 @ 1000MHz-2387MHz


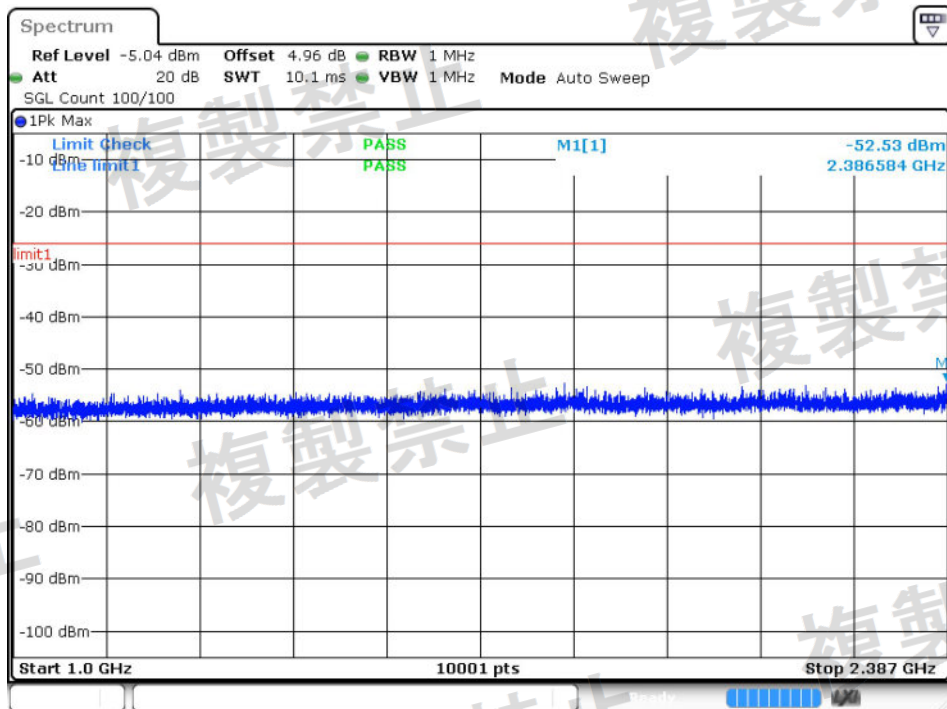


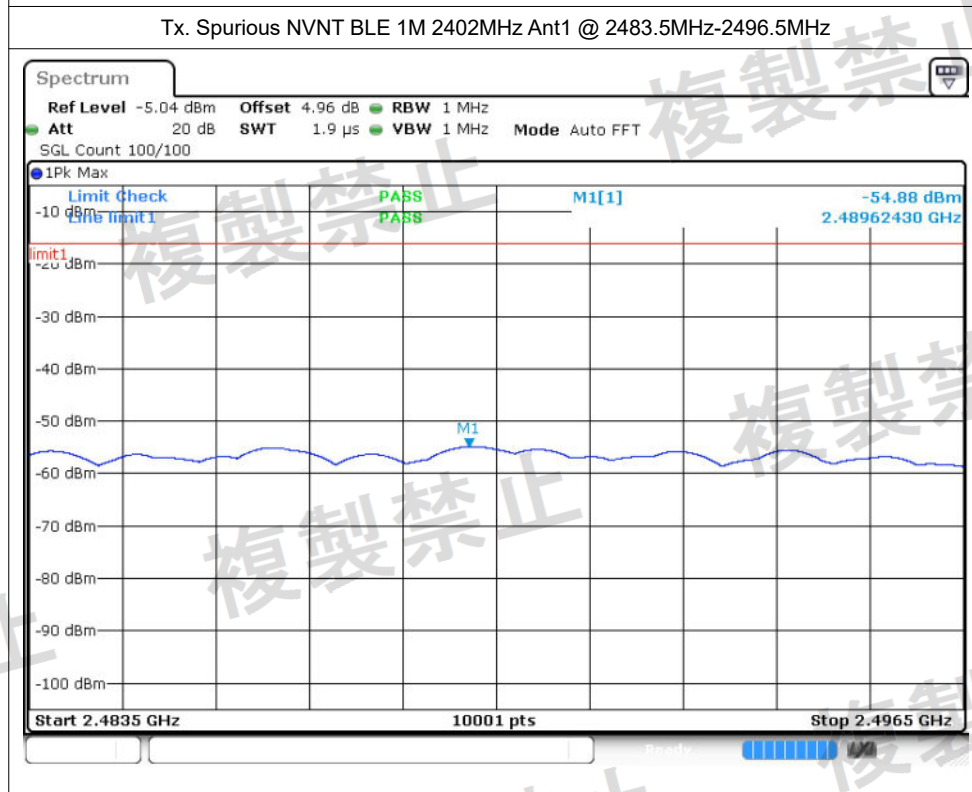
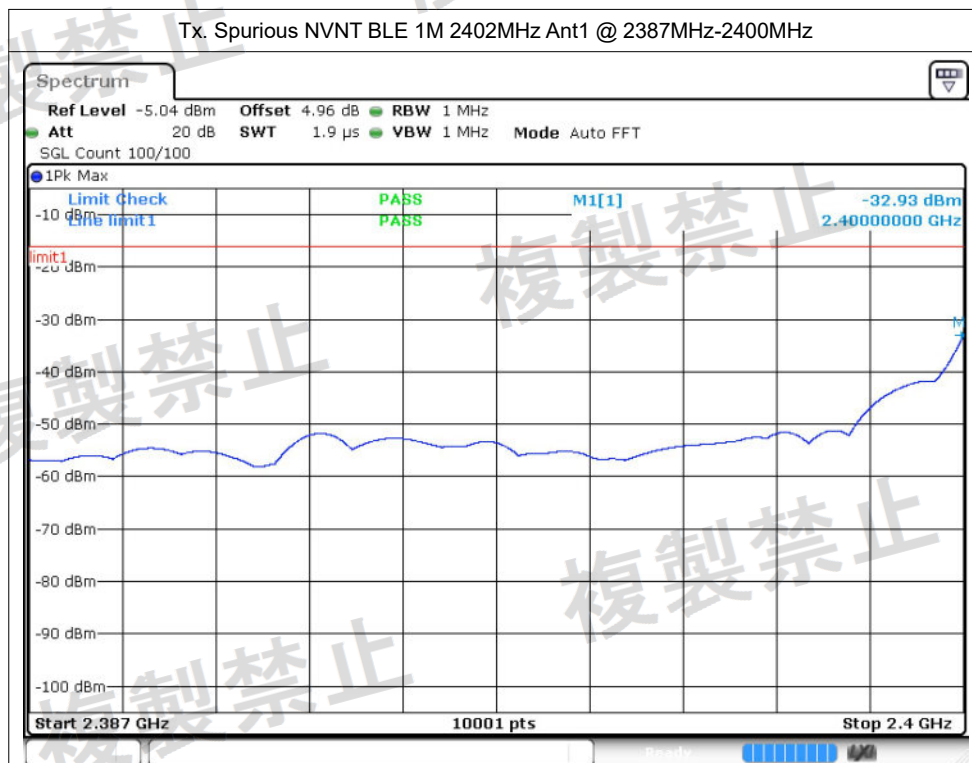


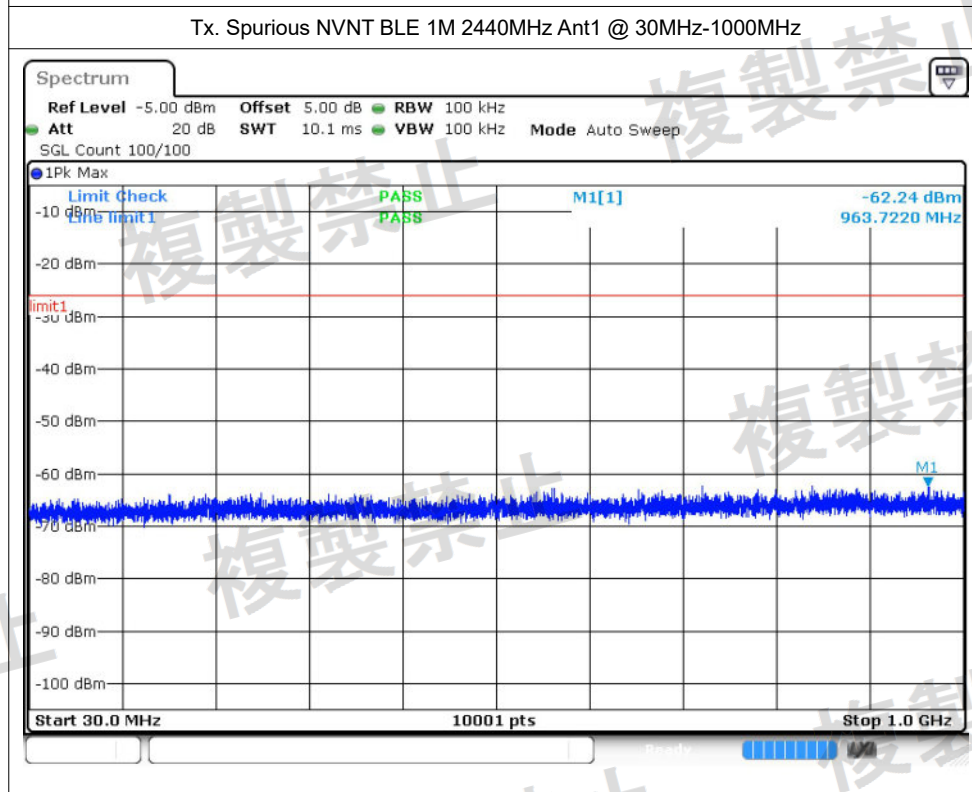
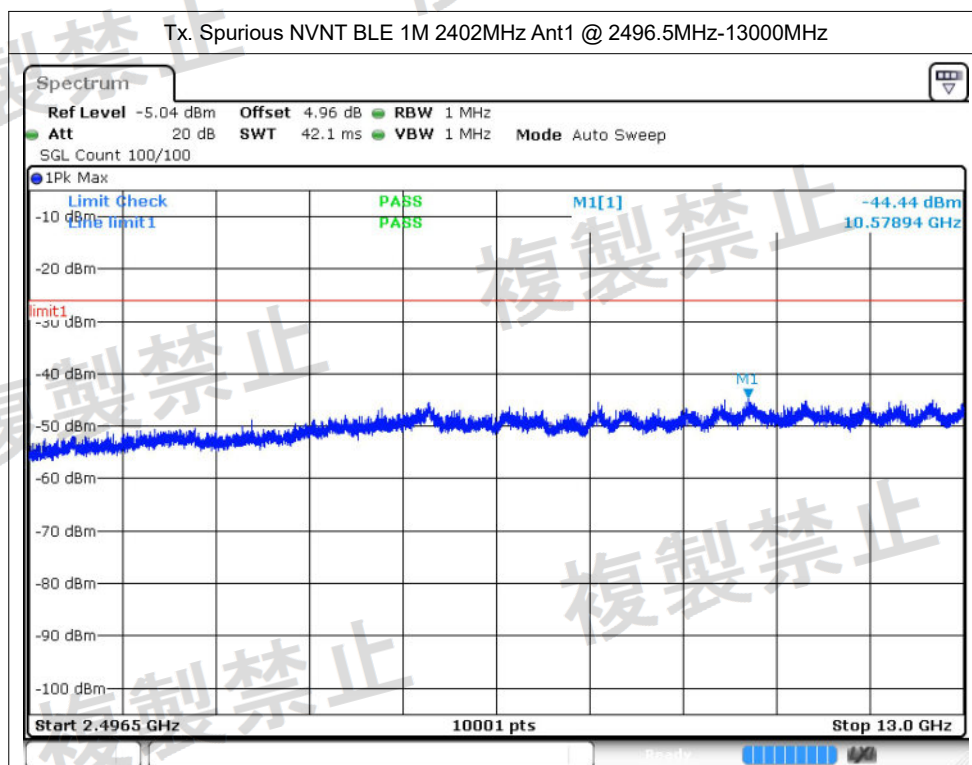


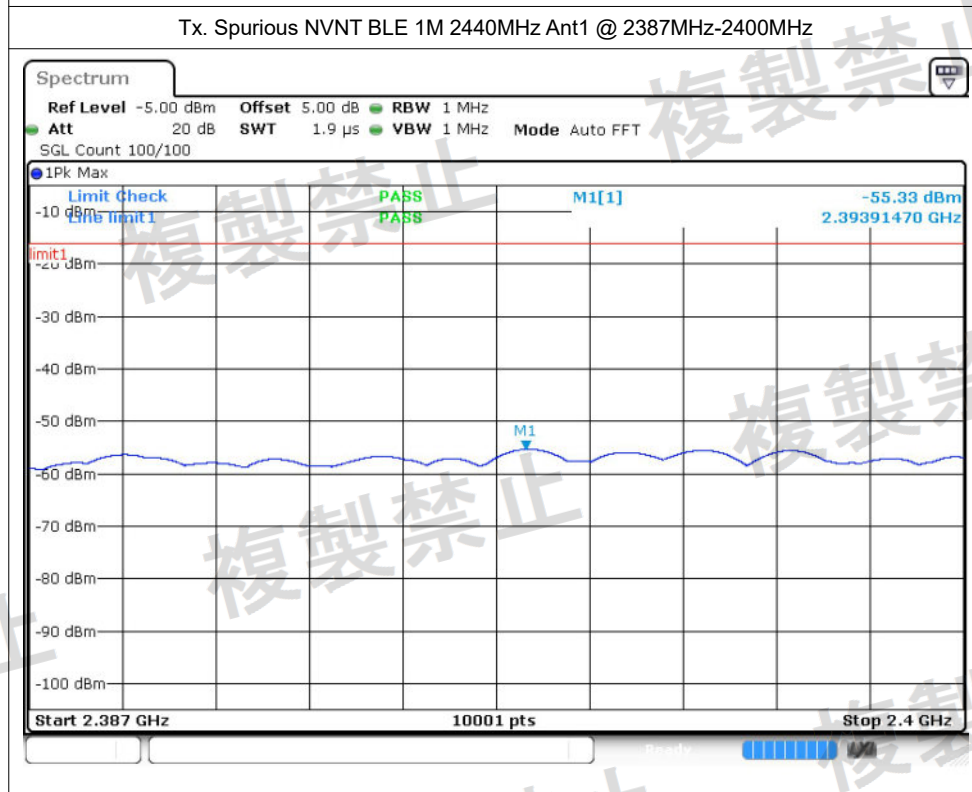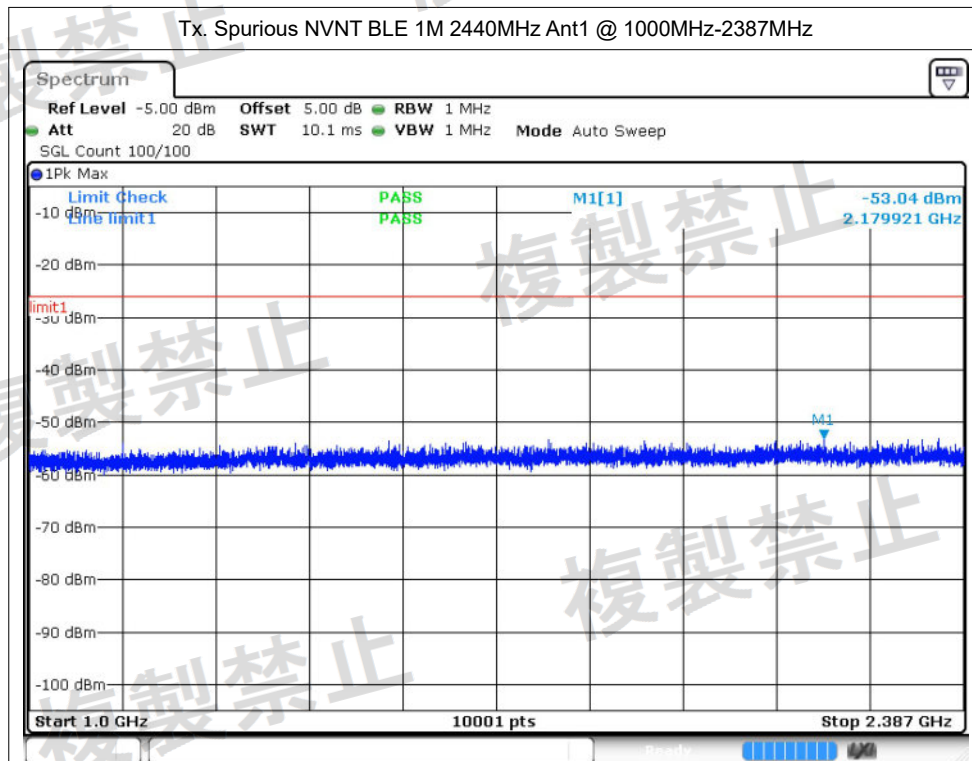


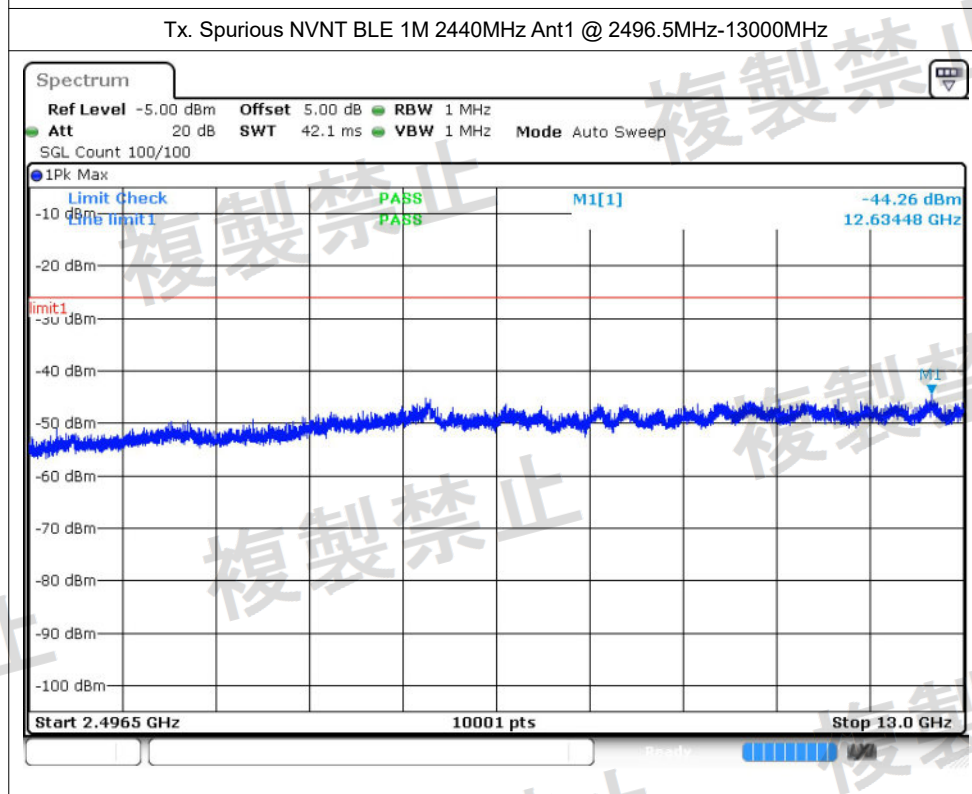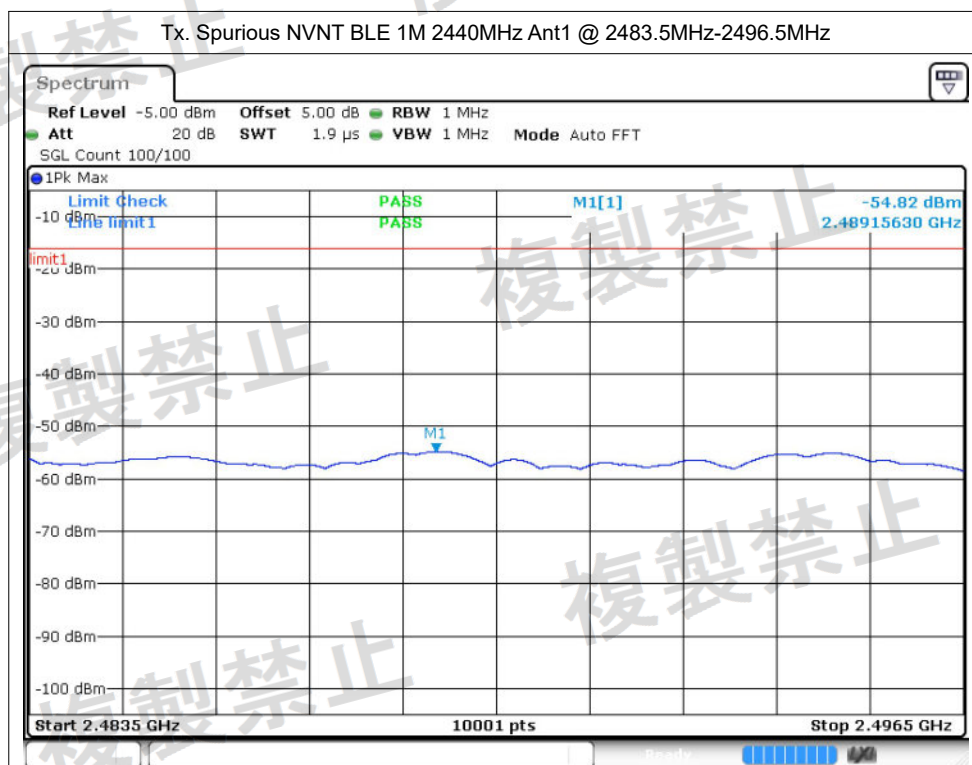


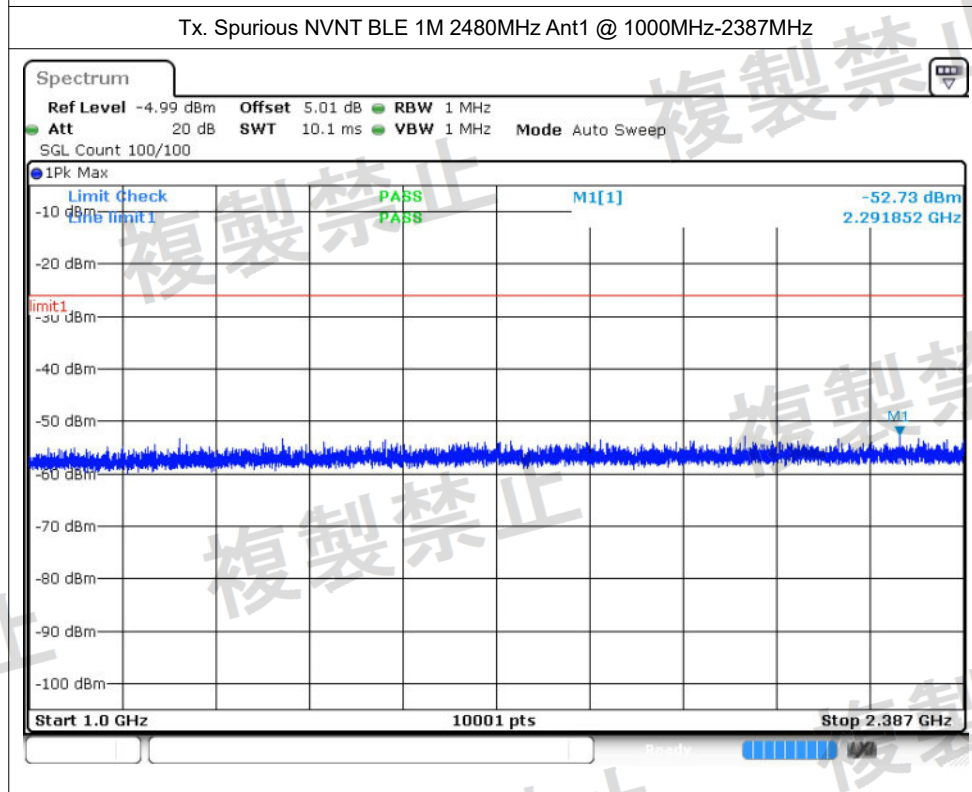
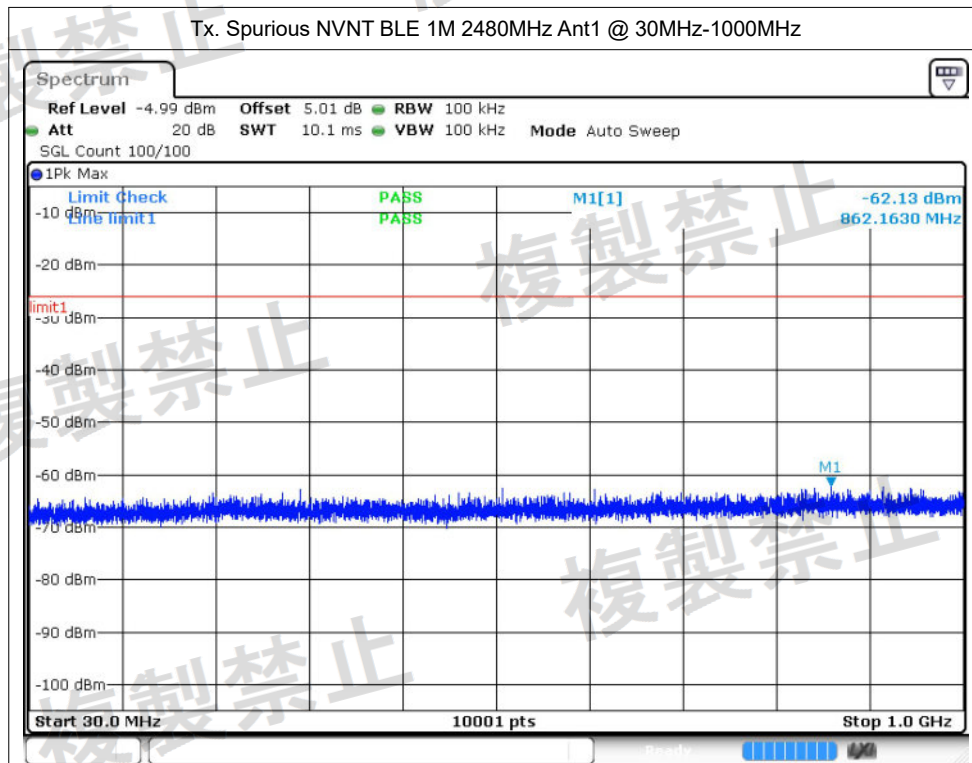


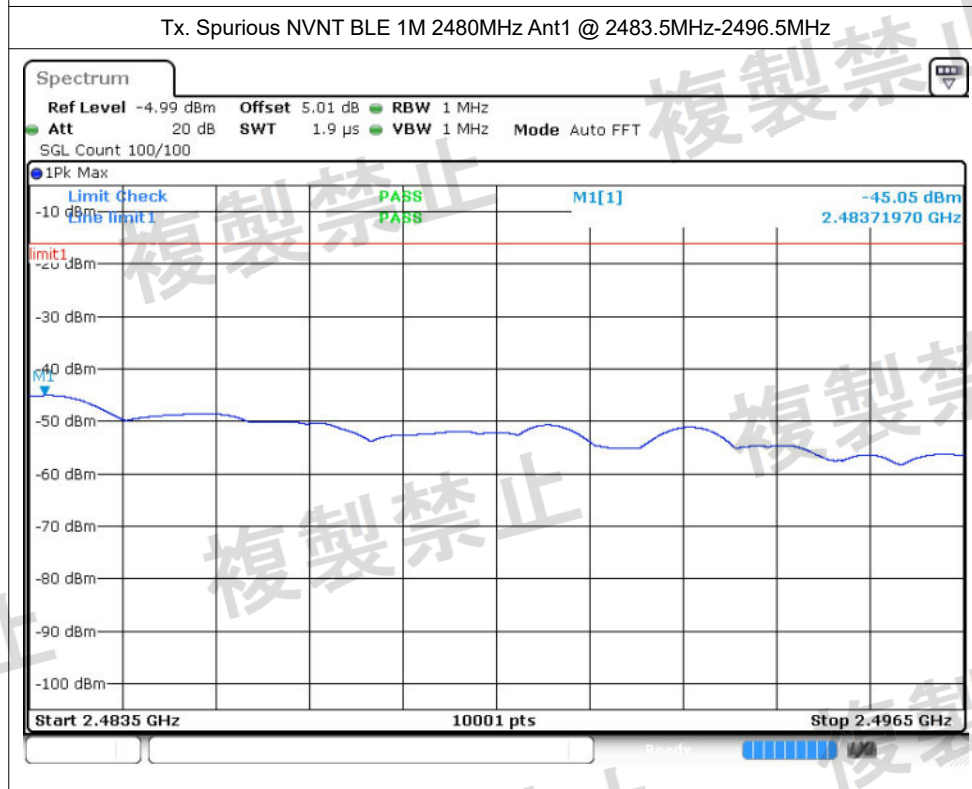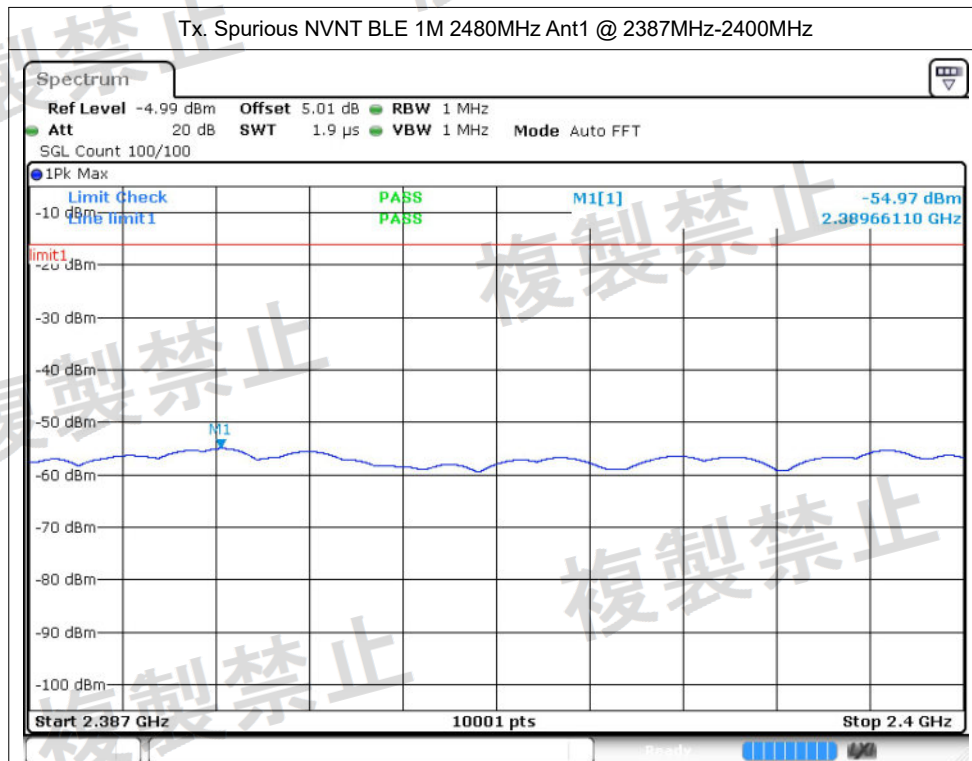


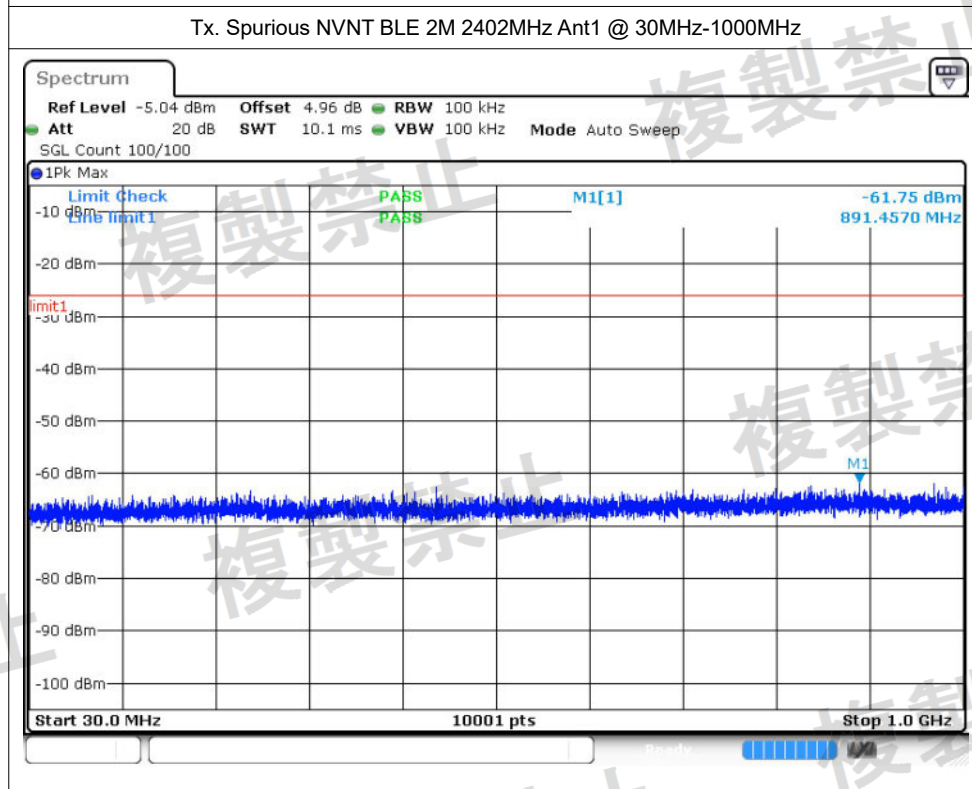
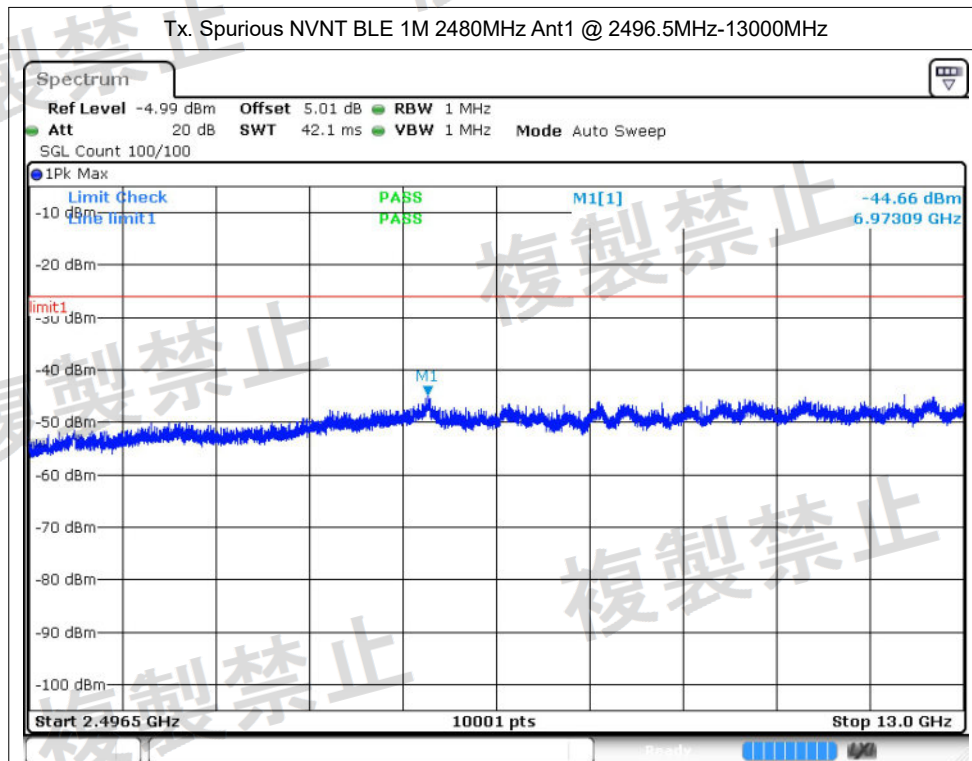



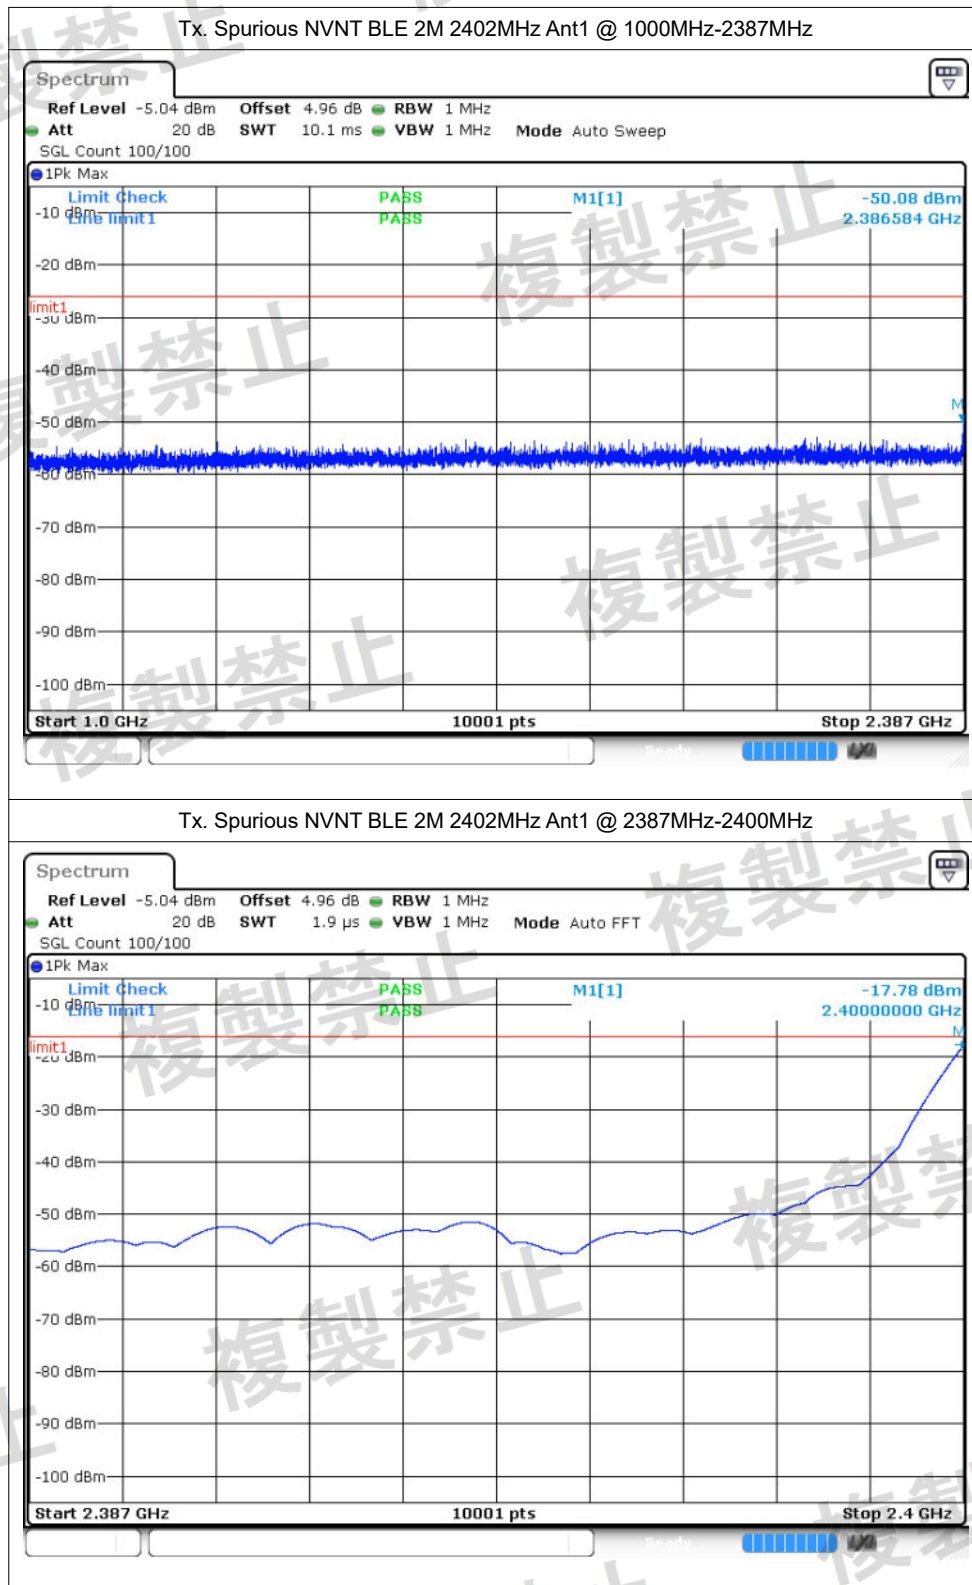



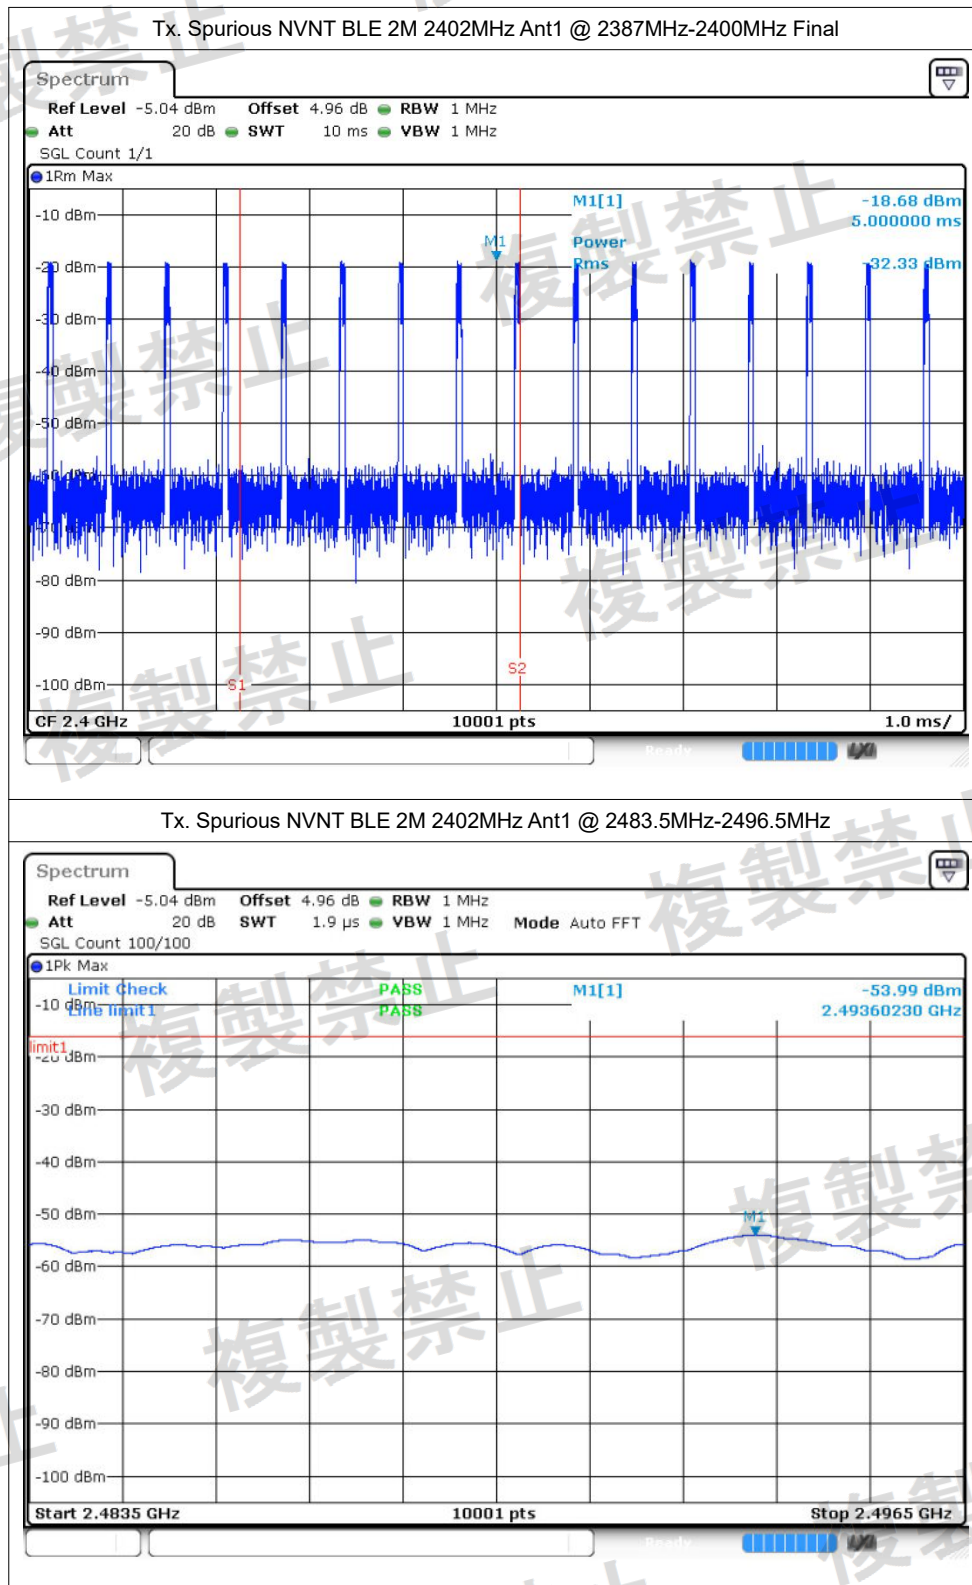


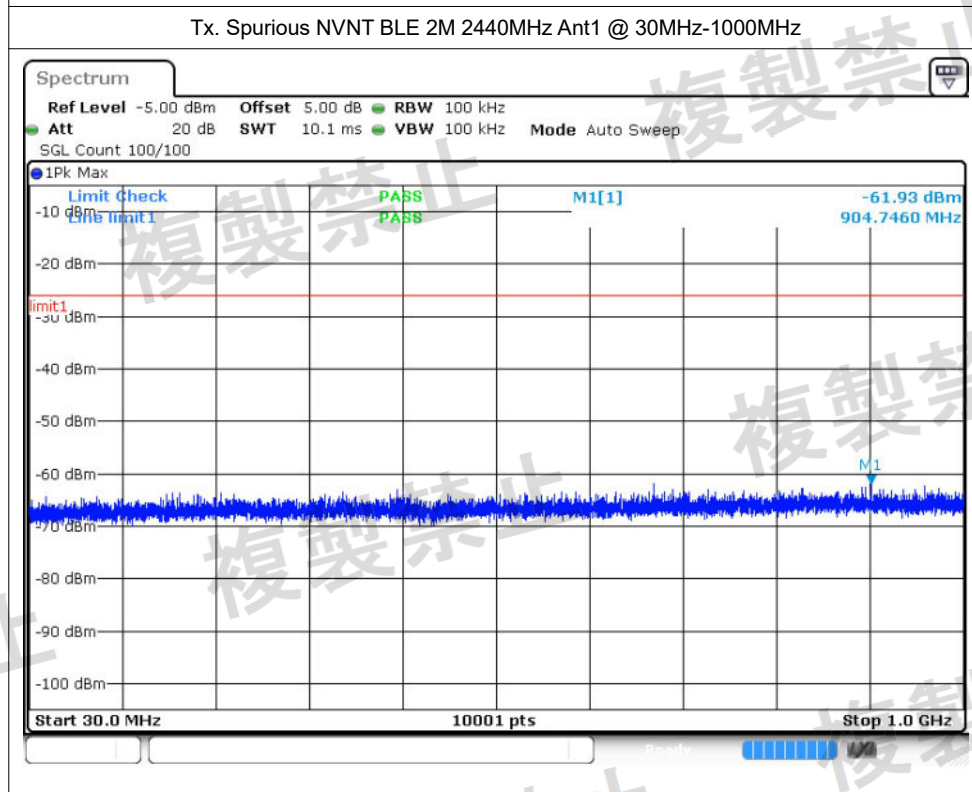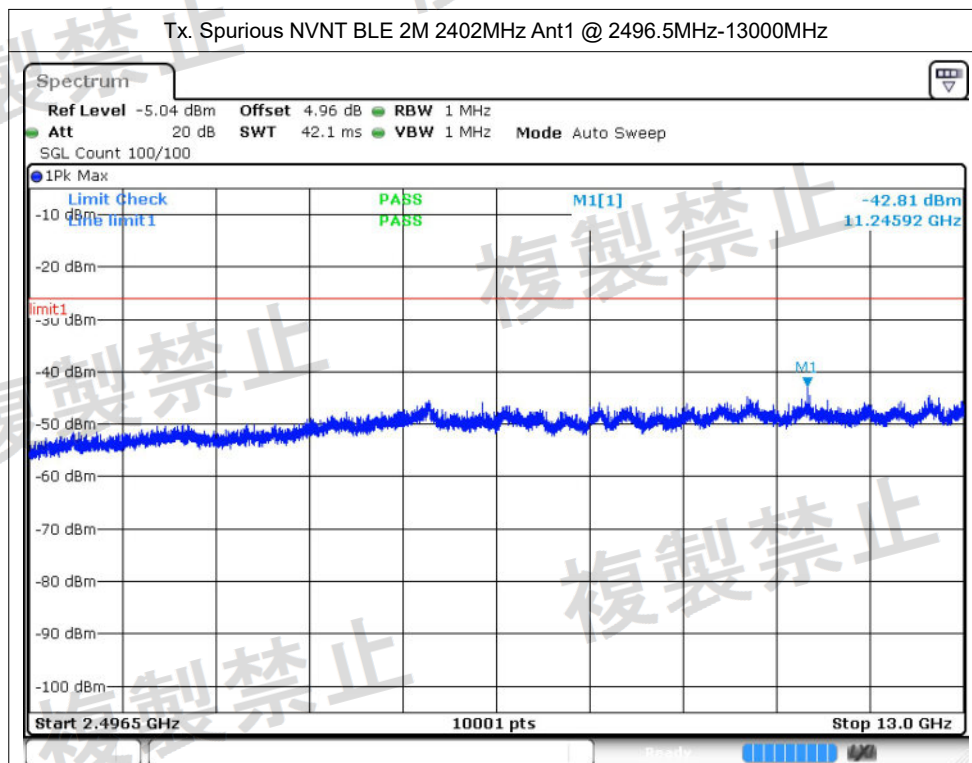


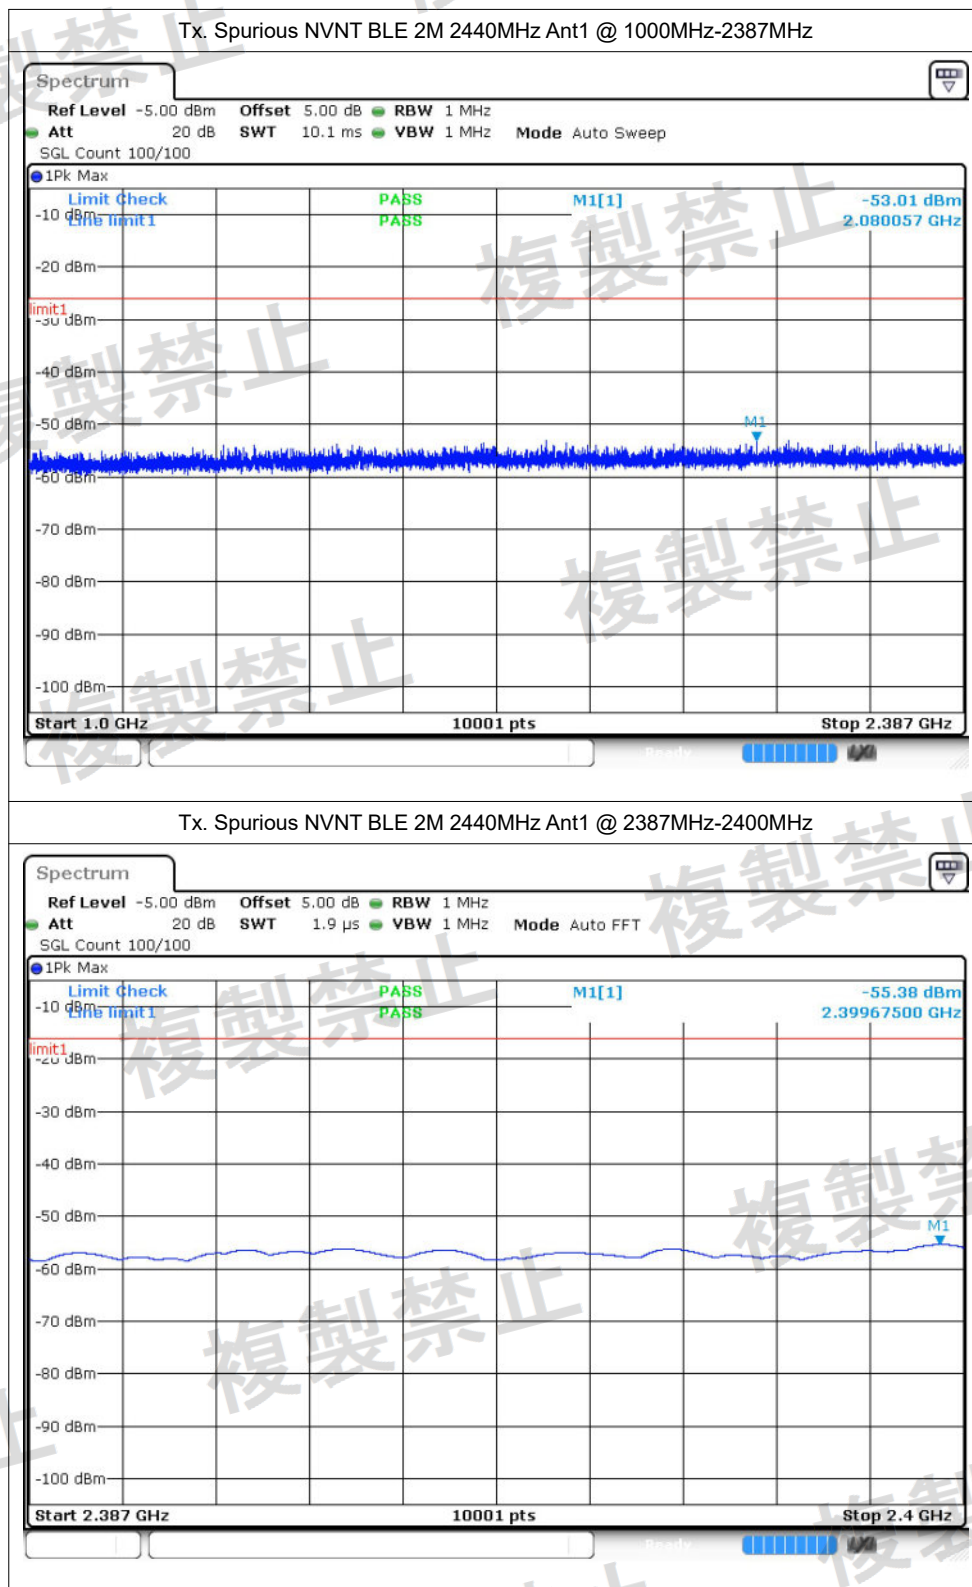


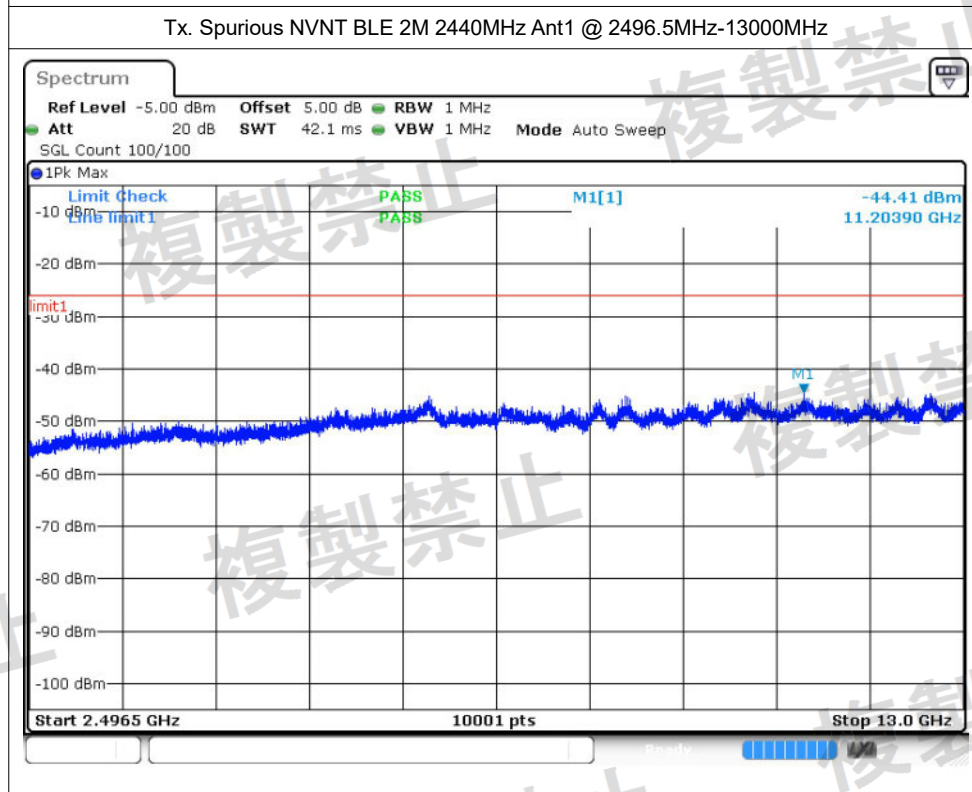
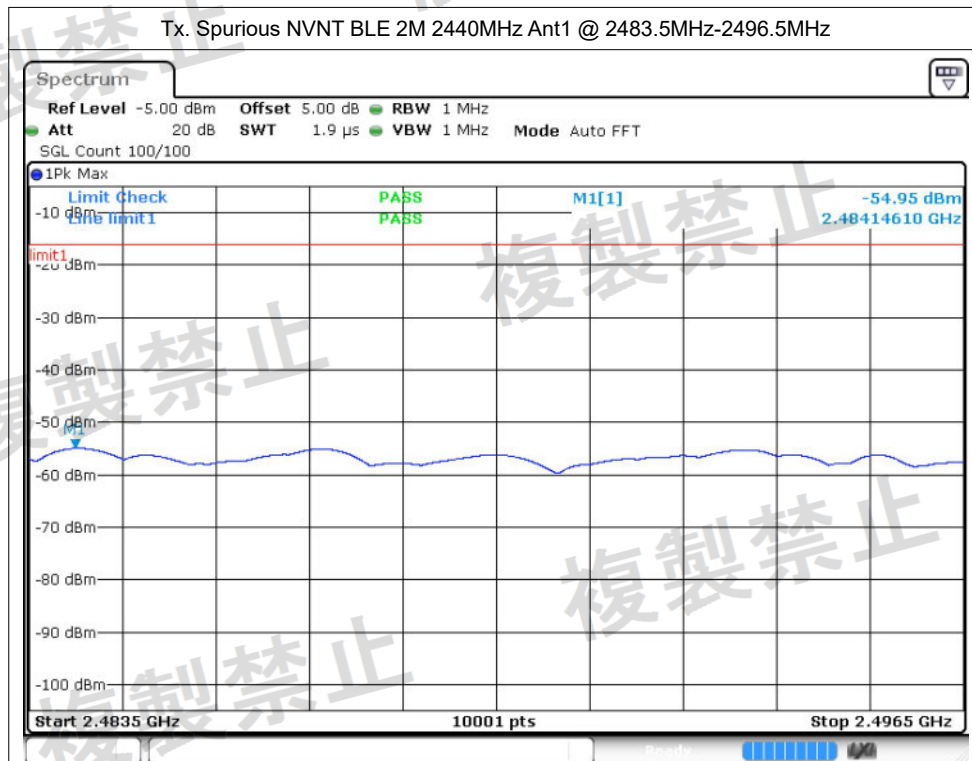


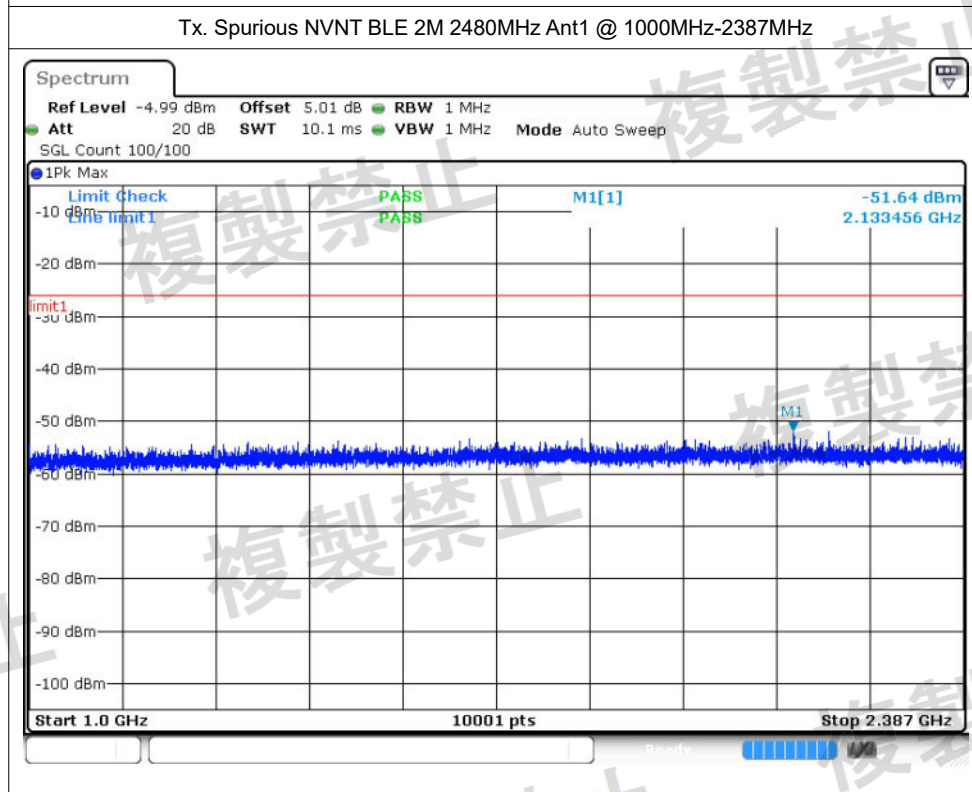
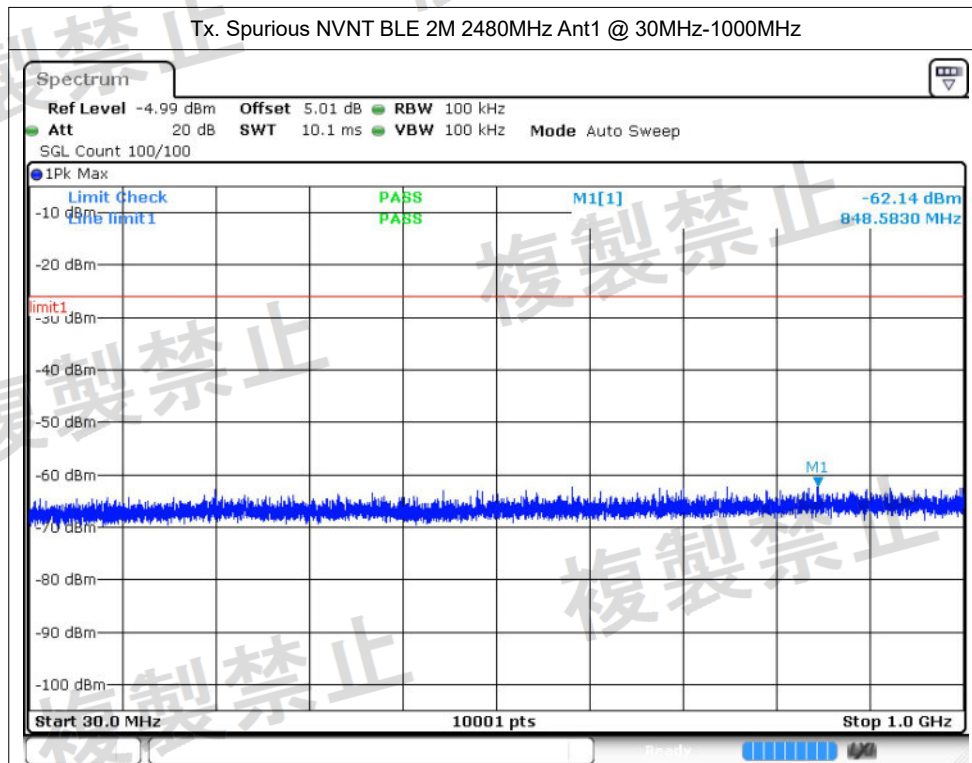


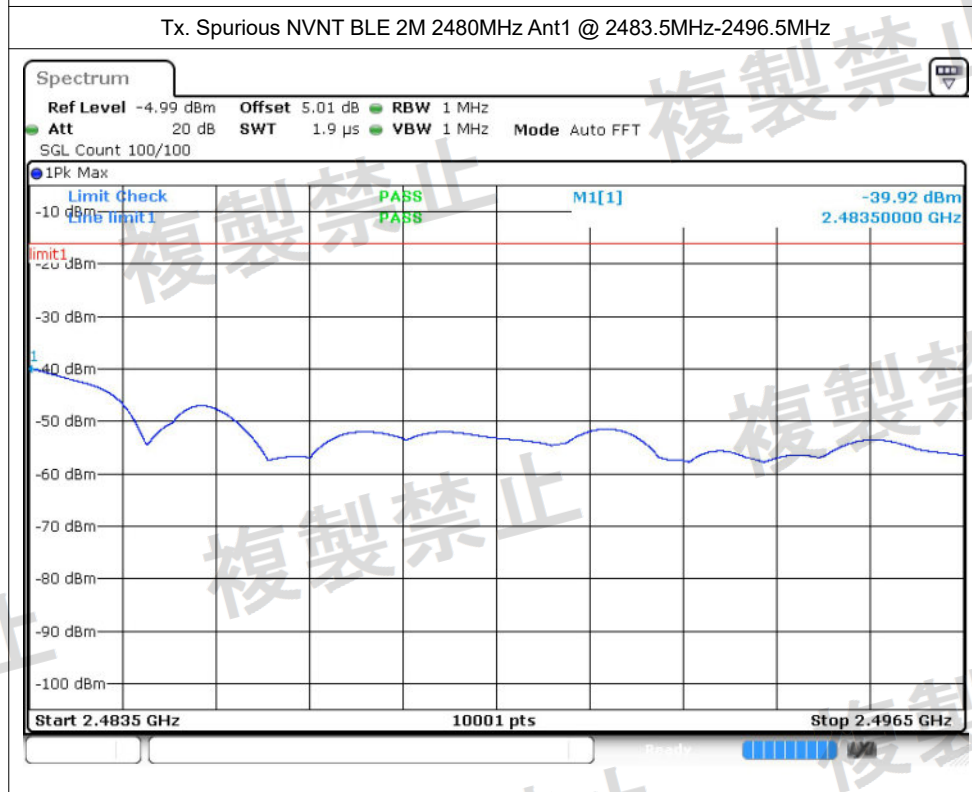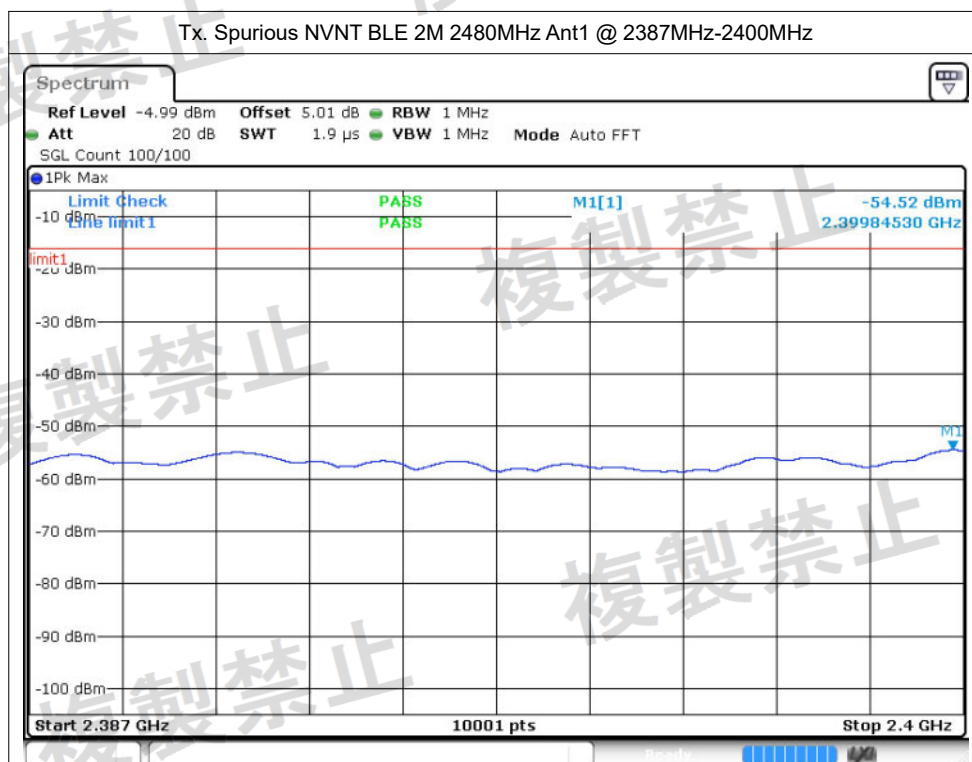



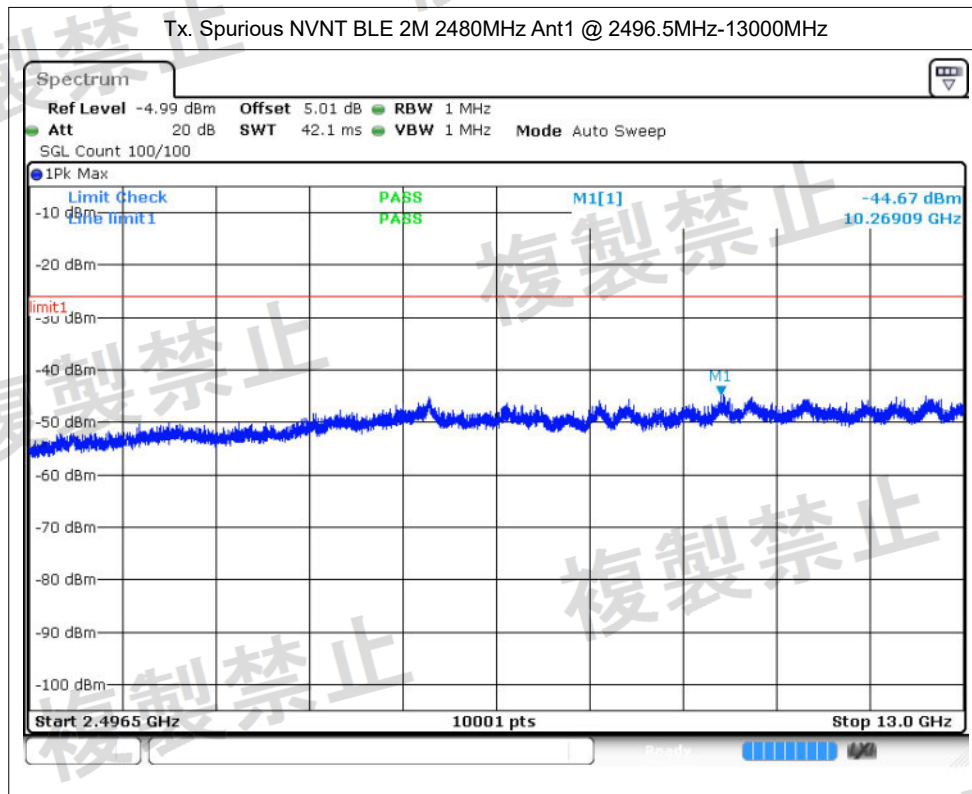



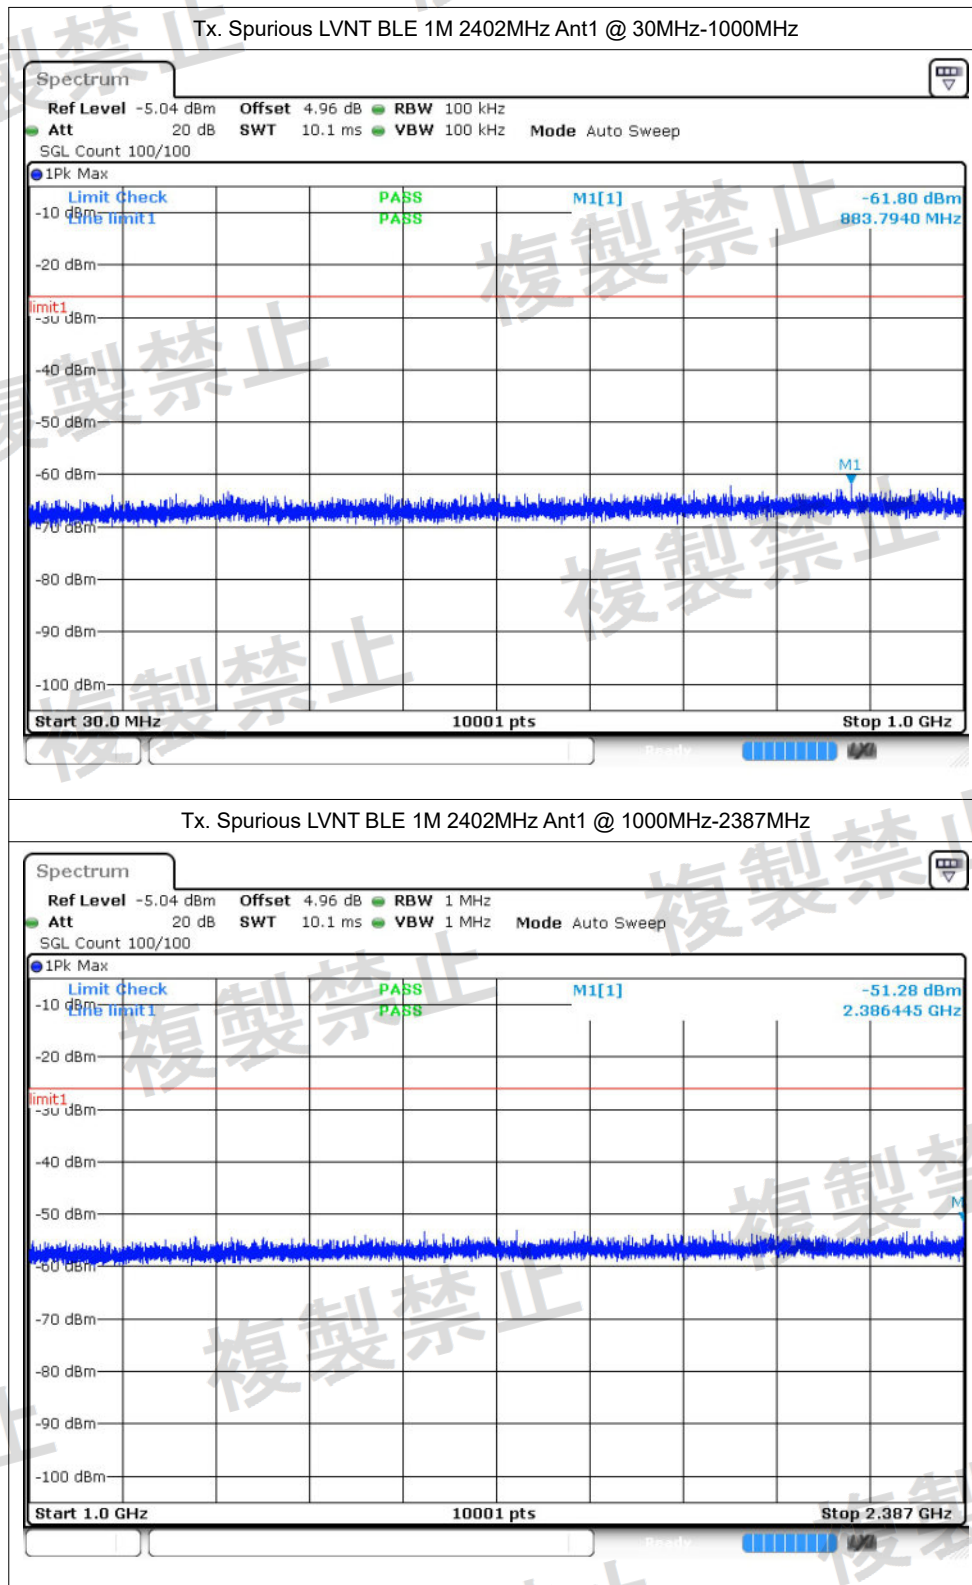


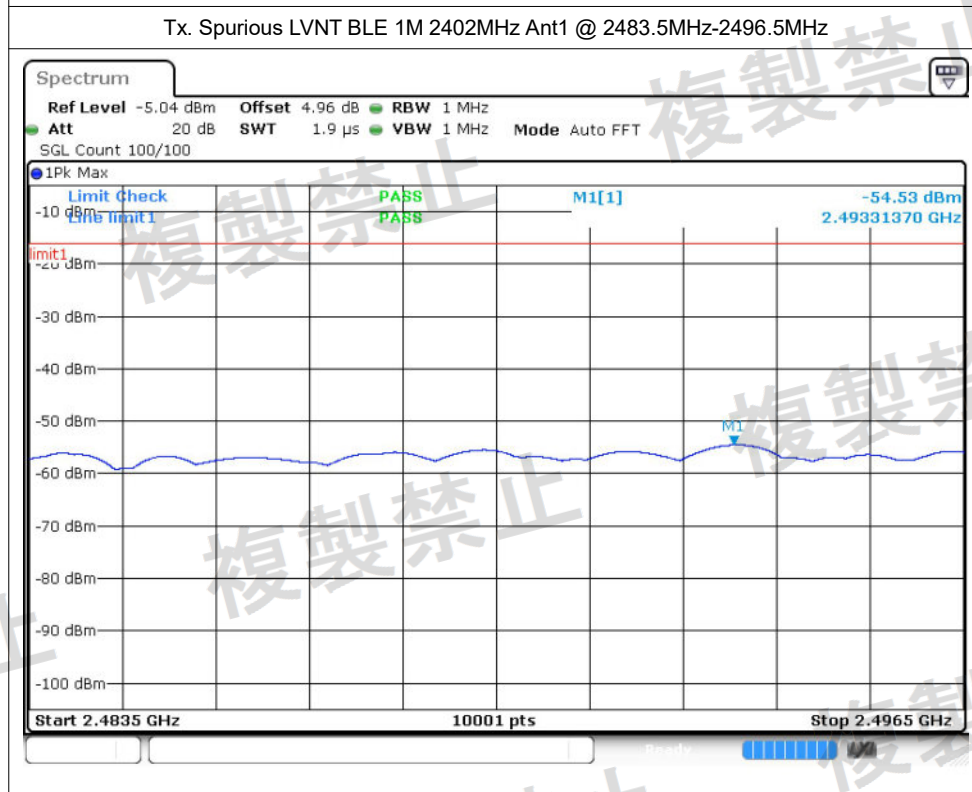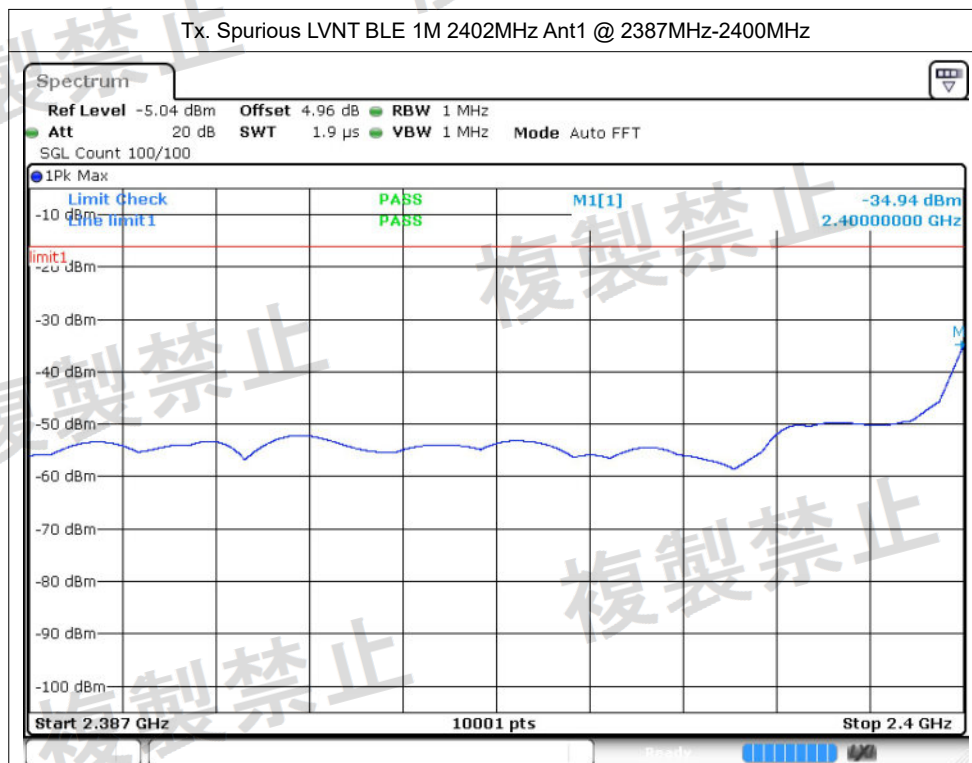


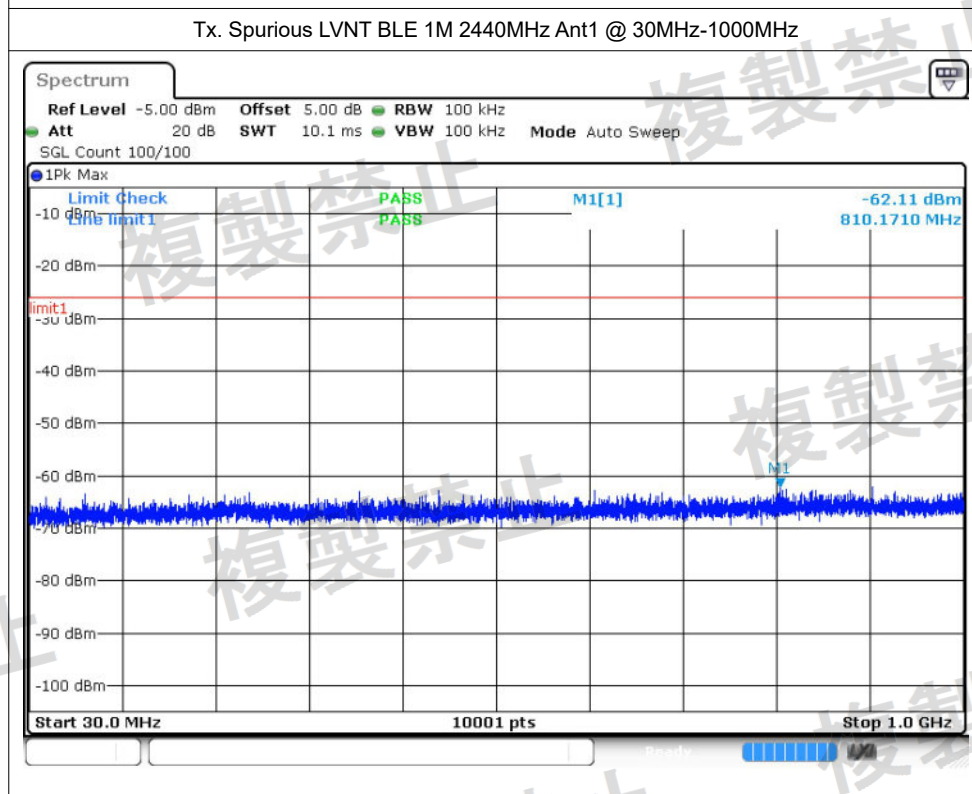
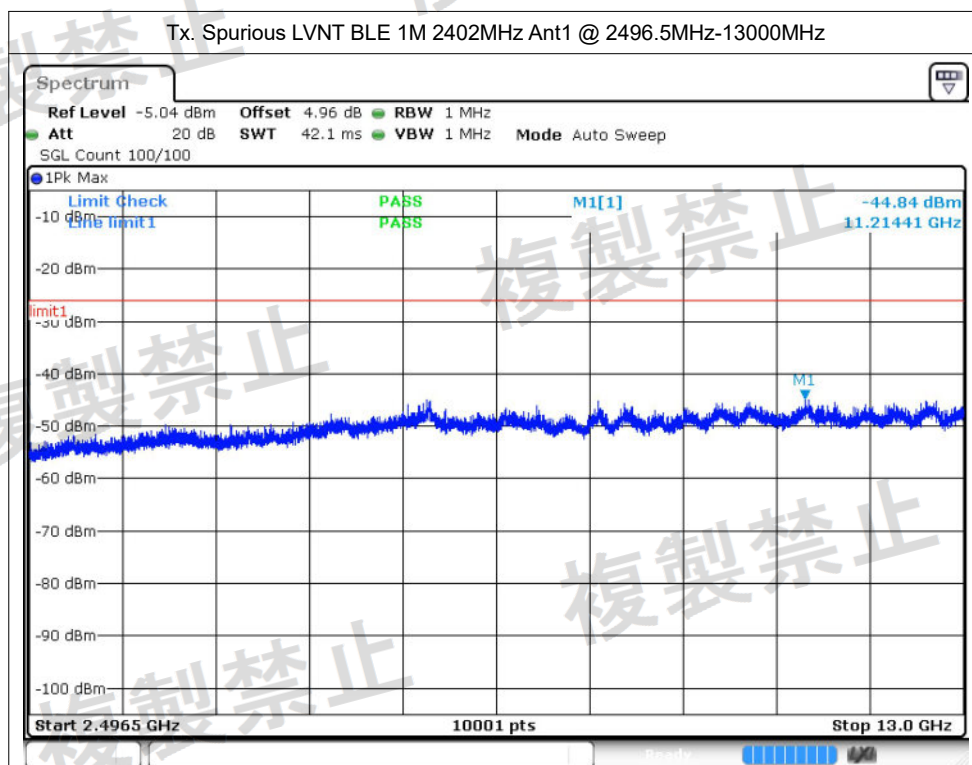


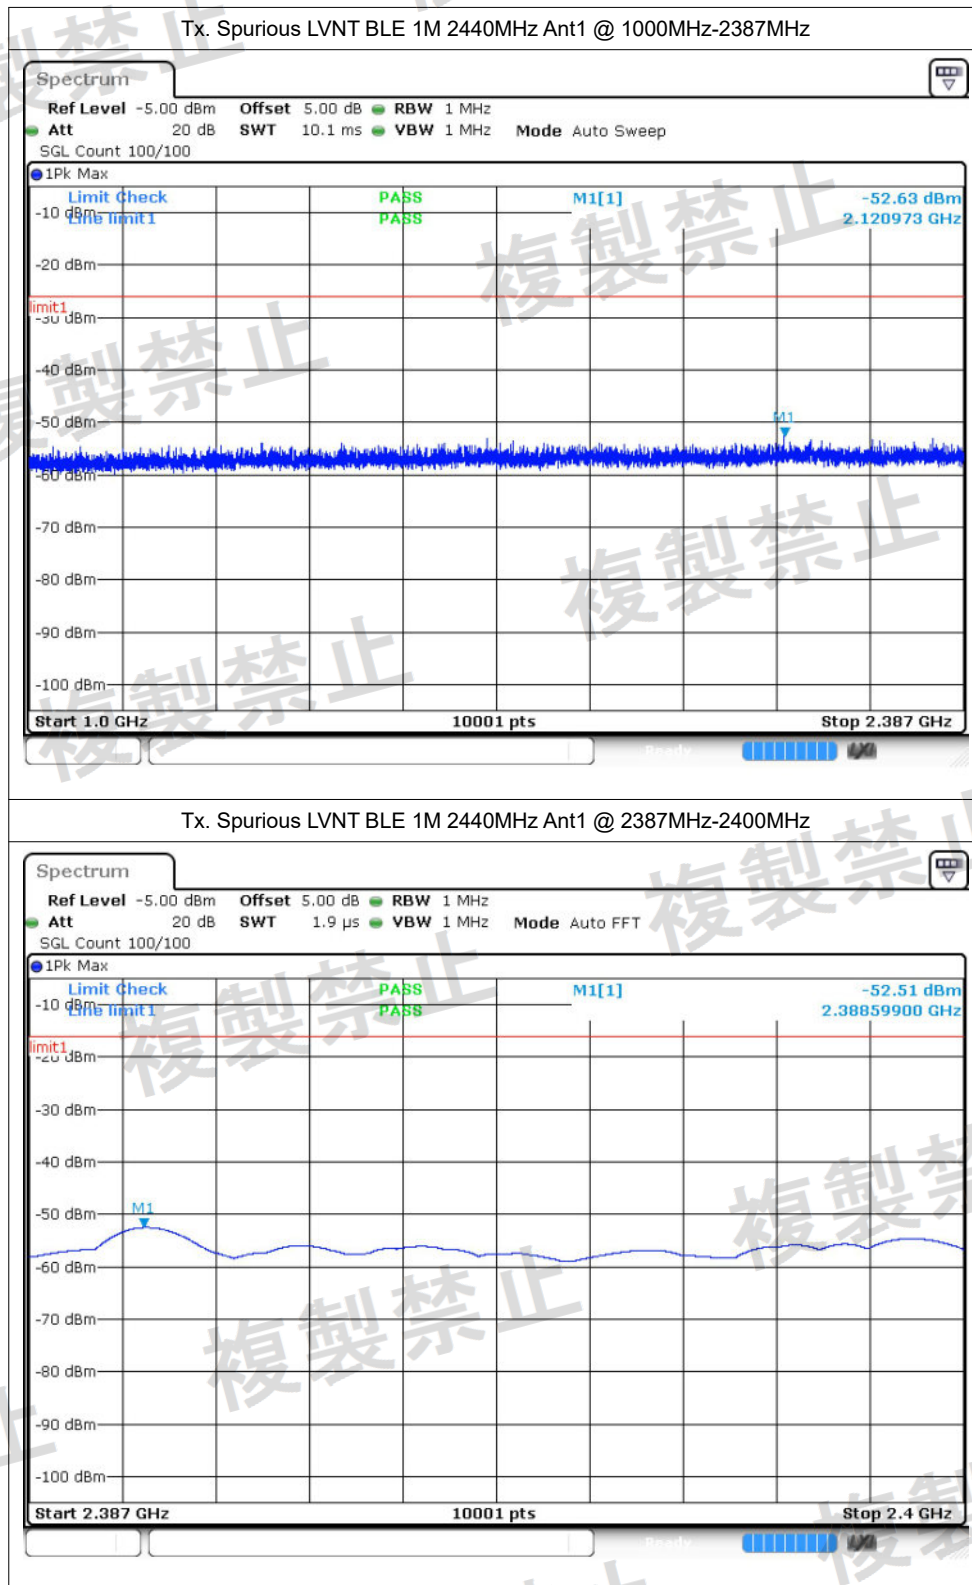


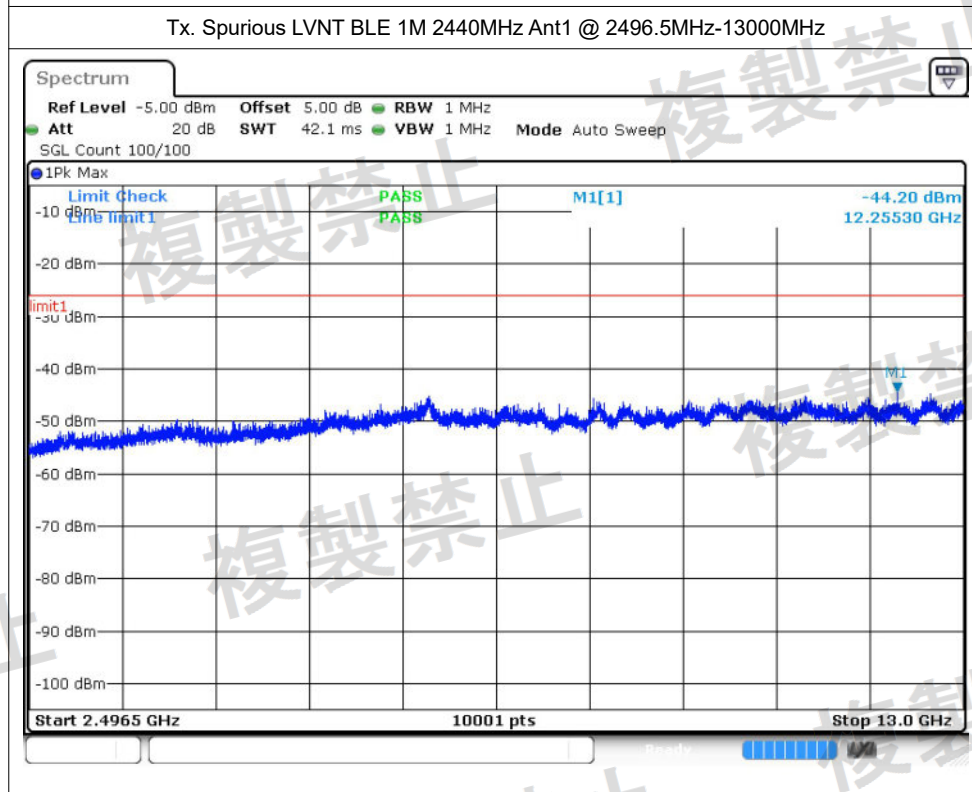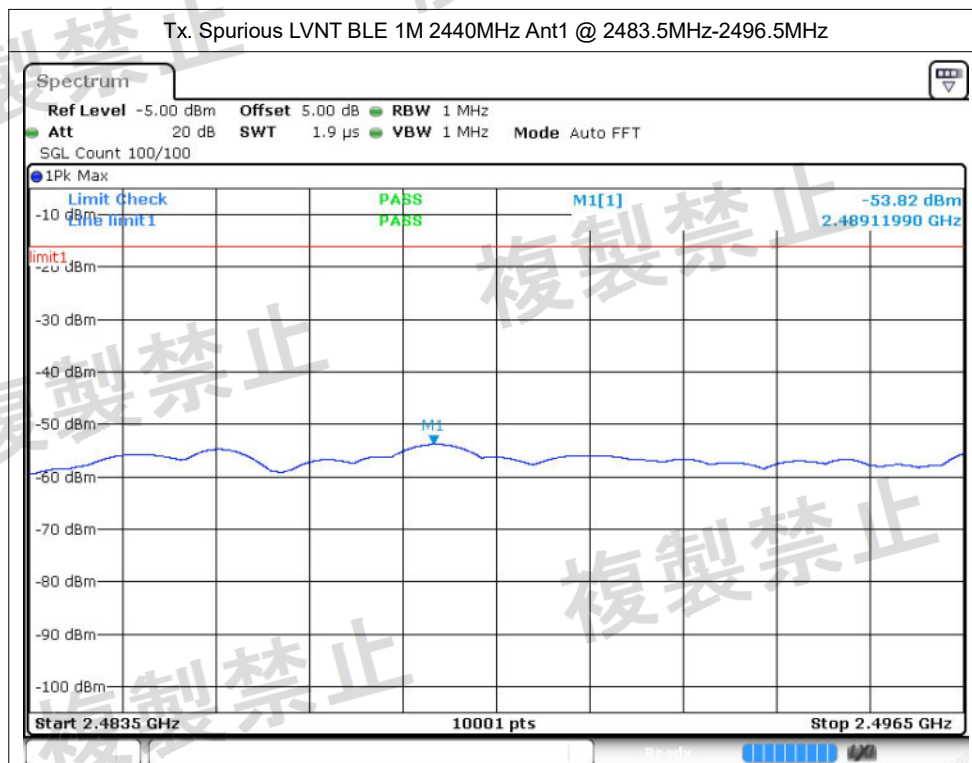


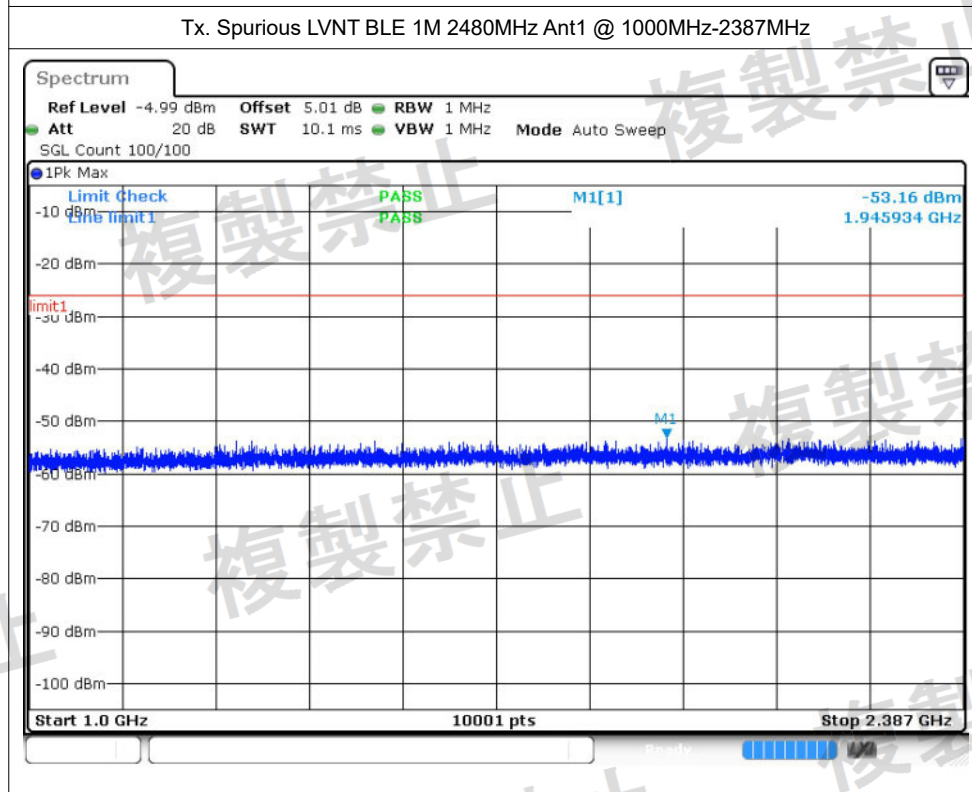
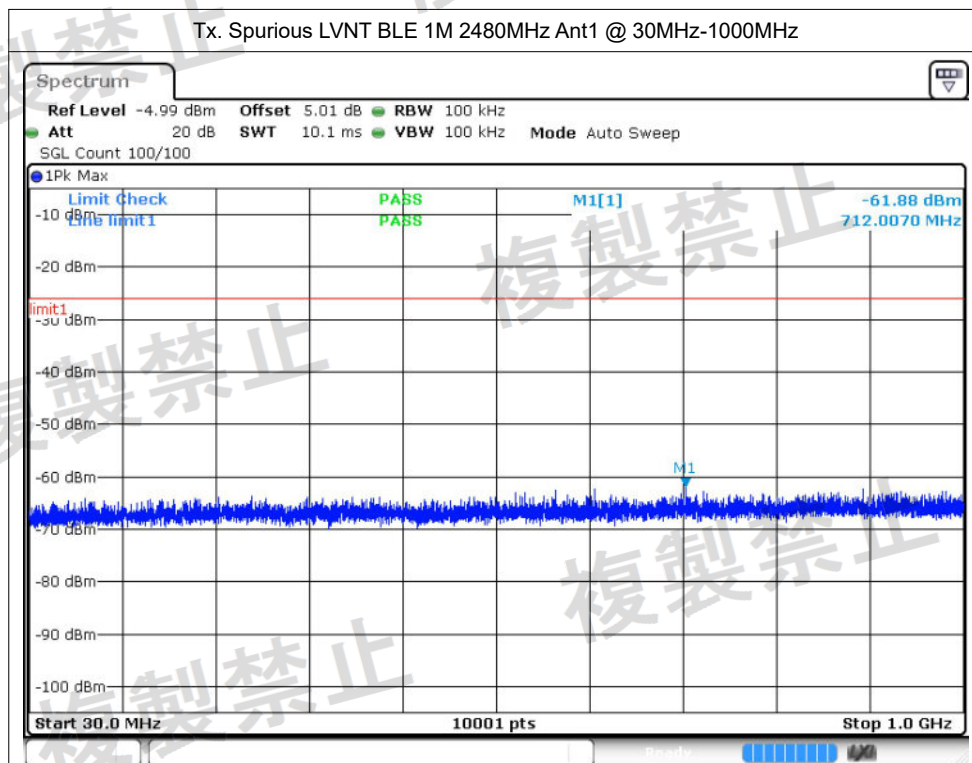



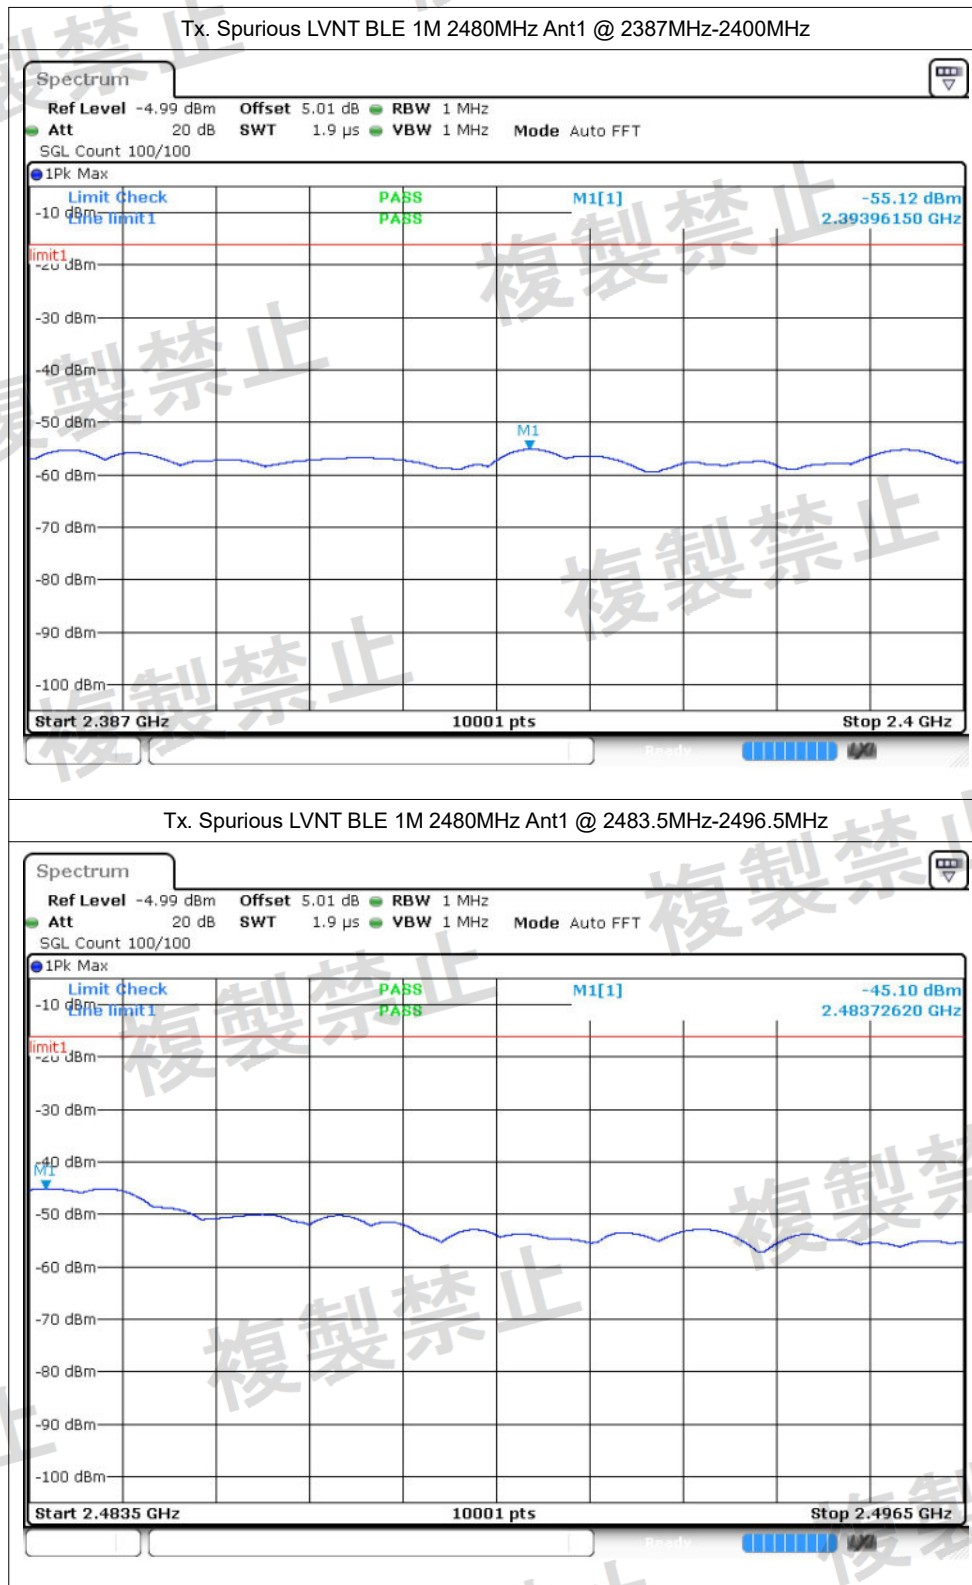


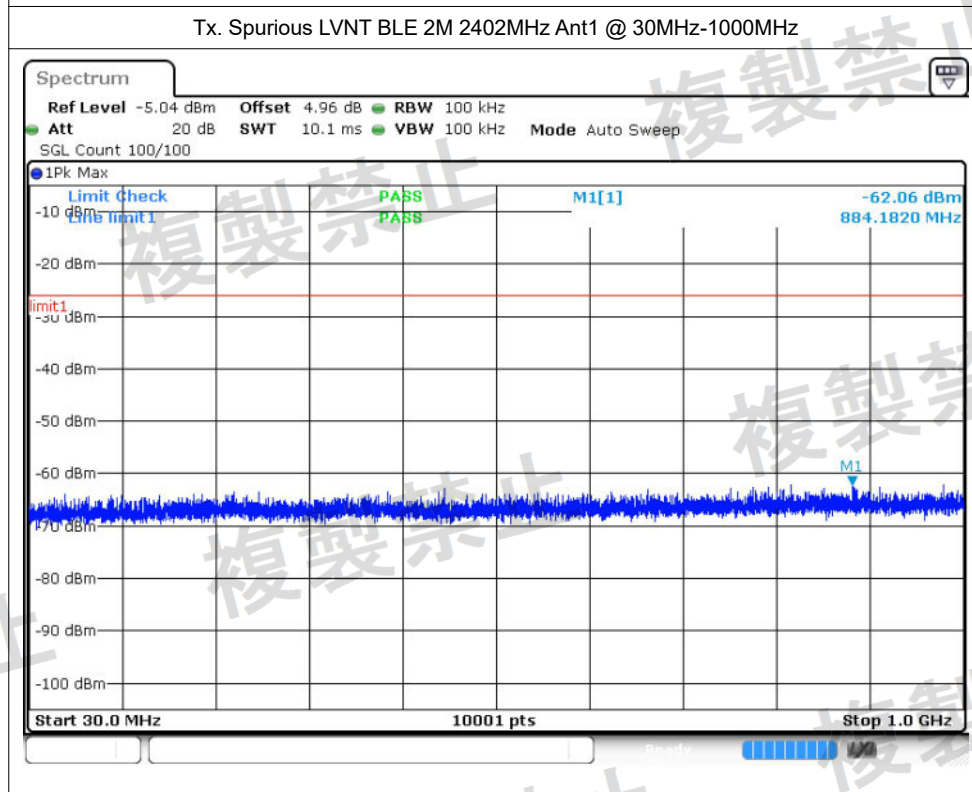
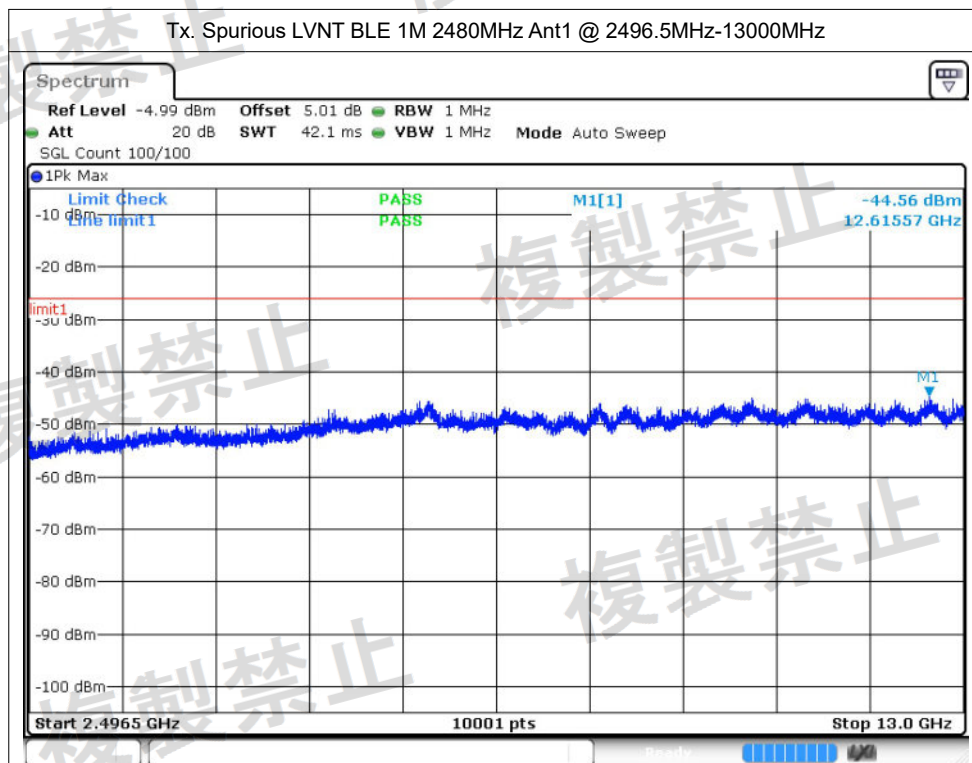



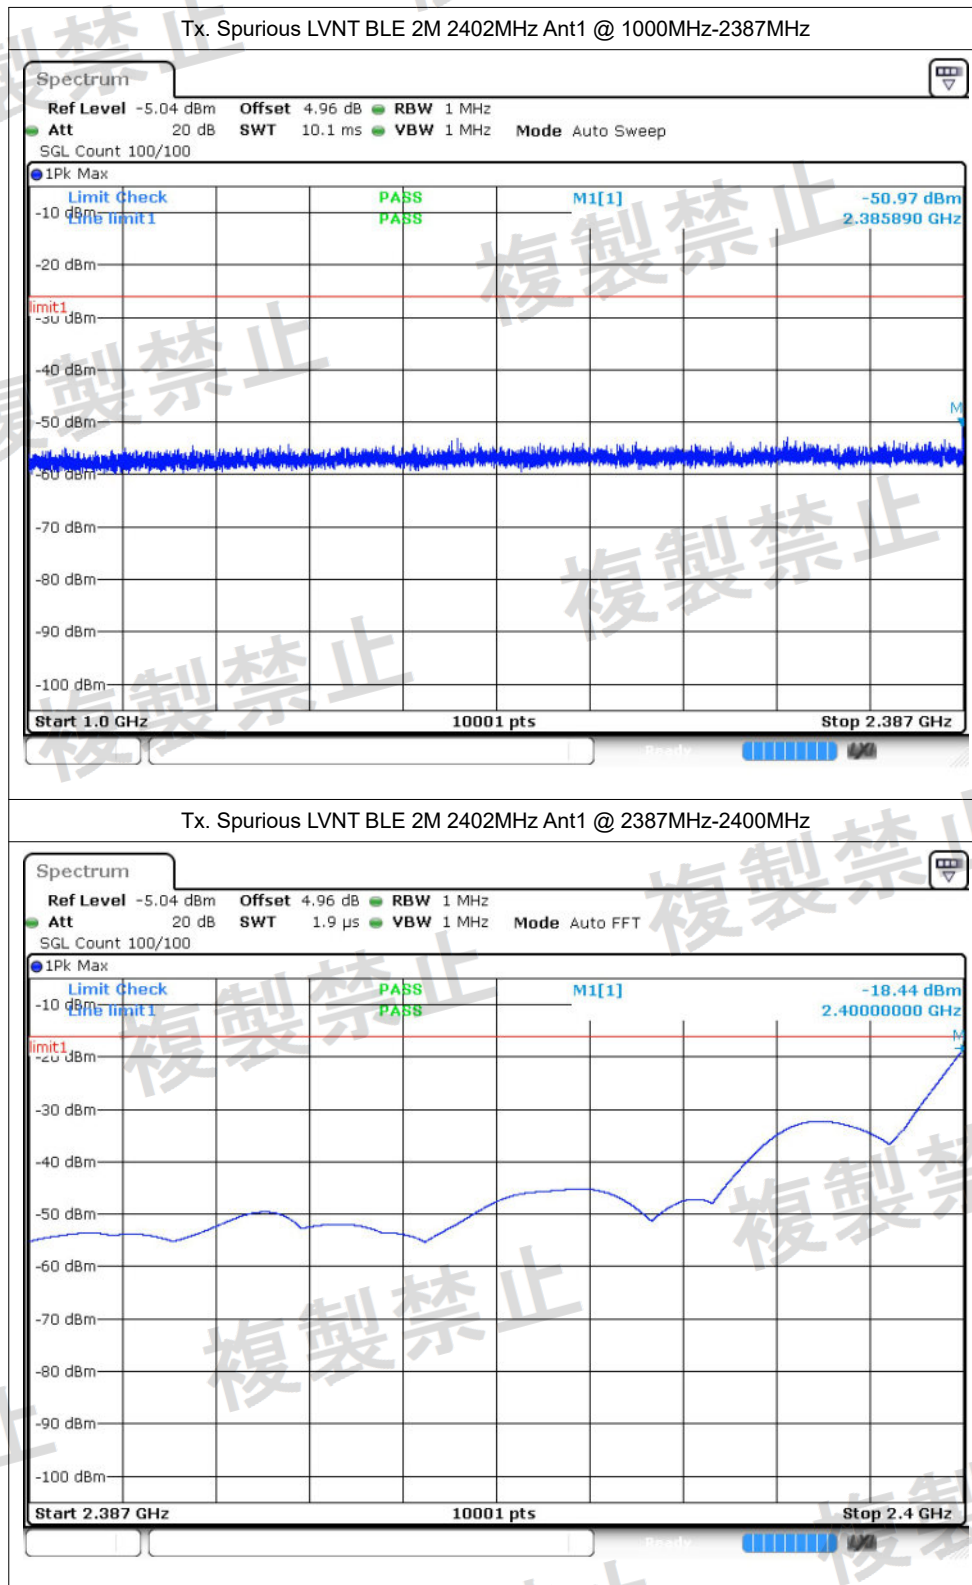



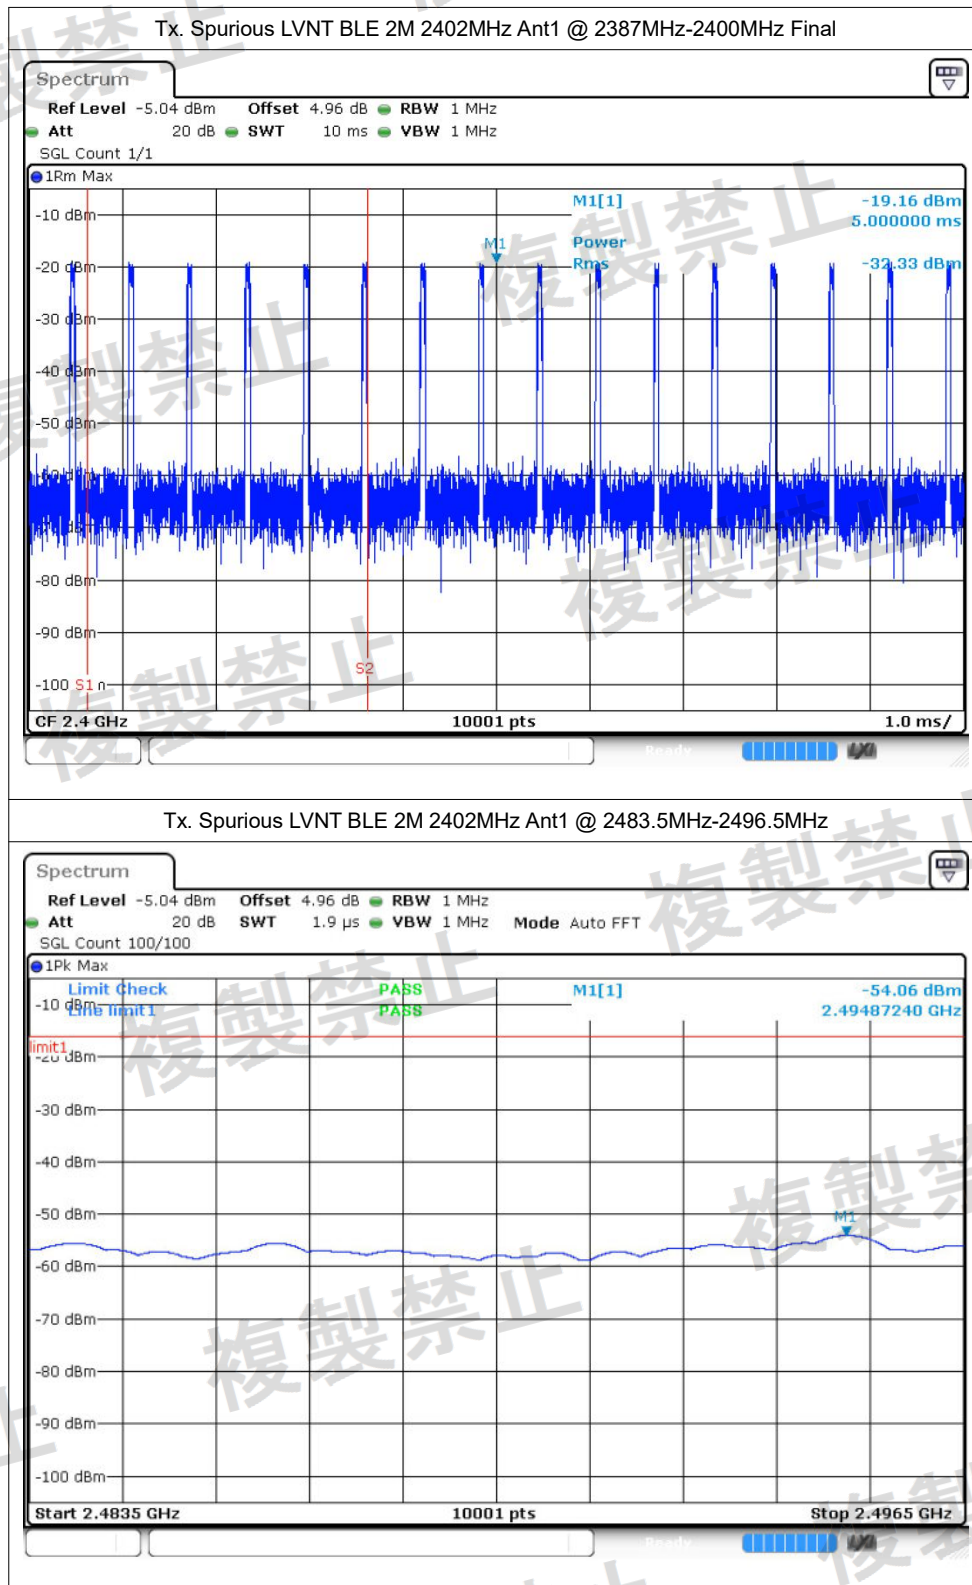


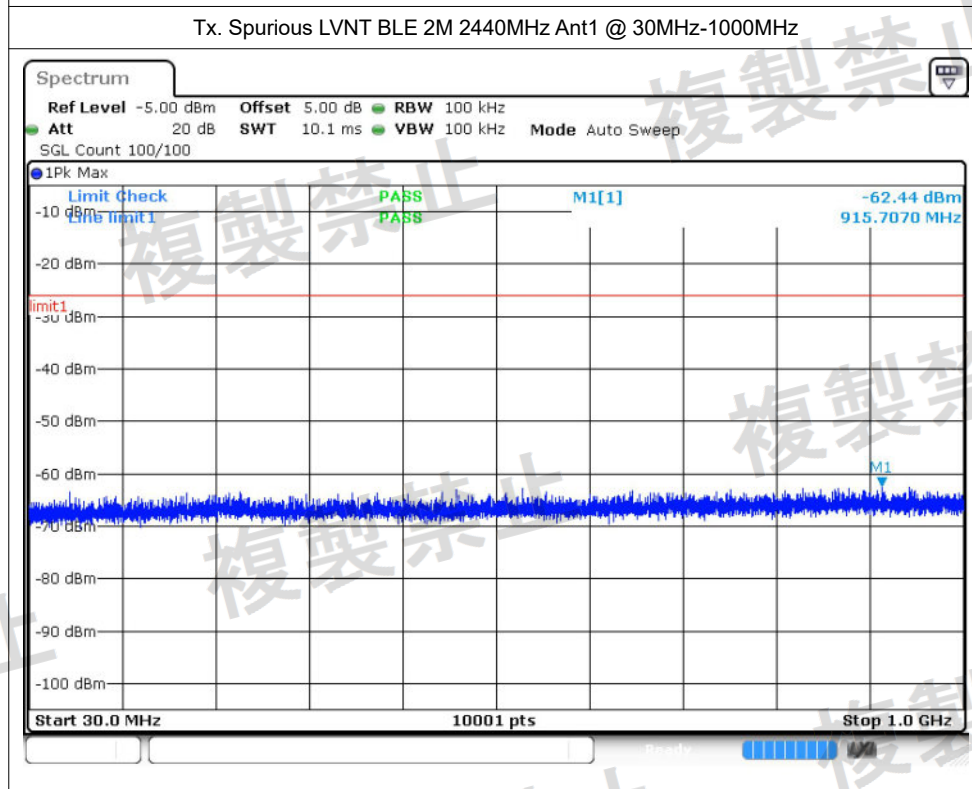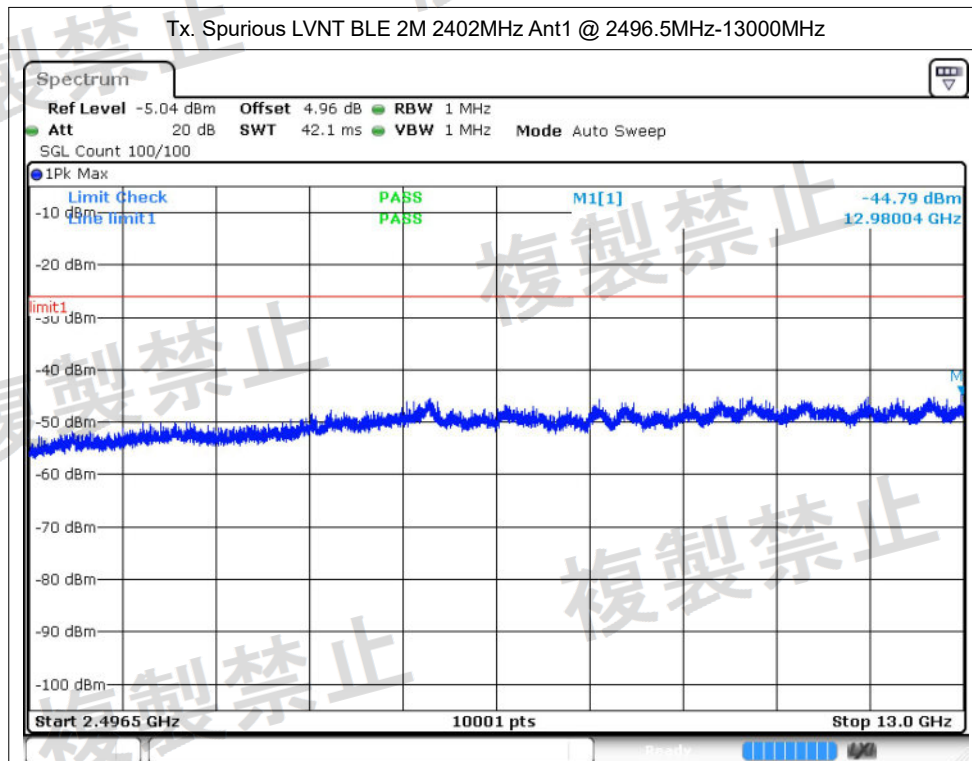


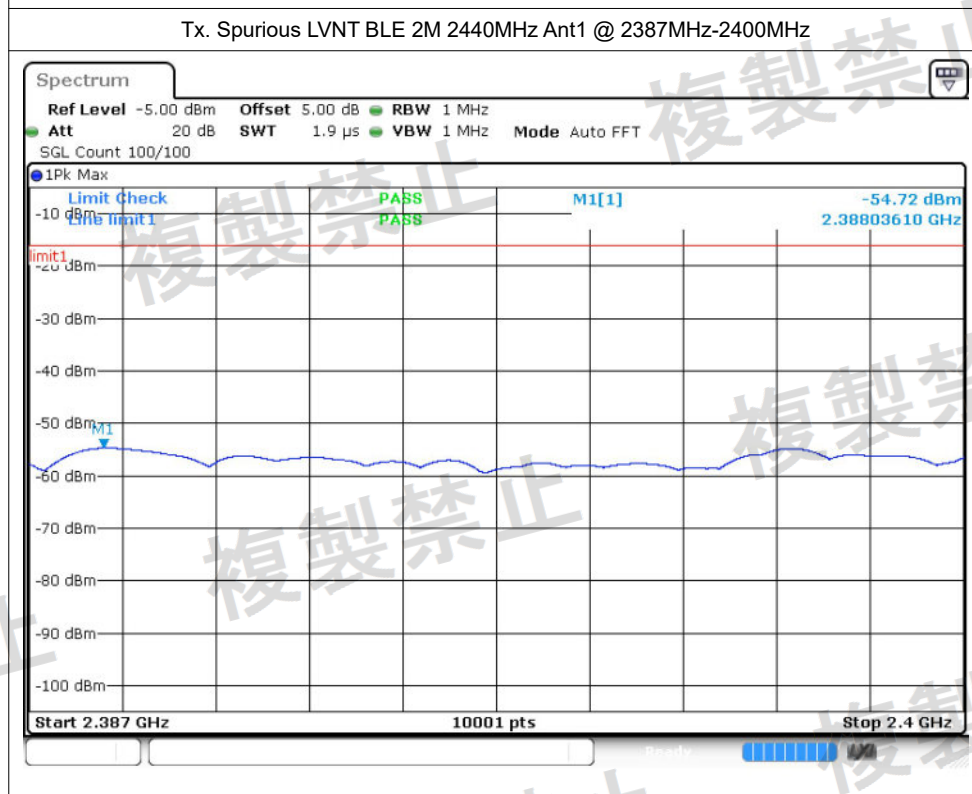
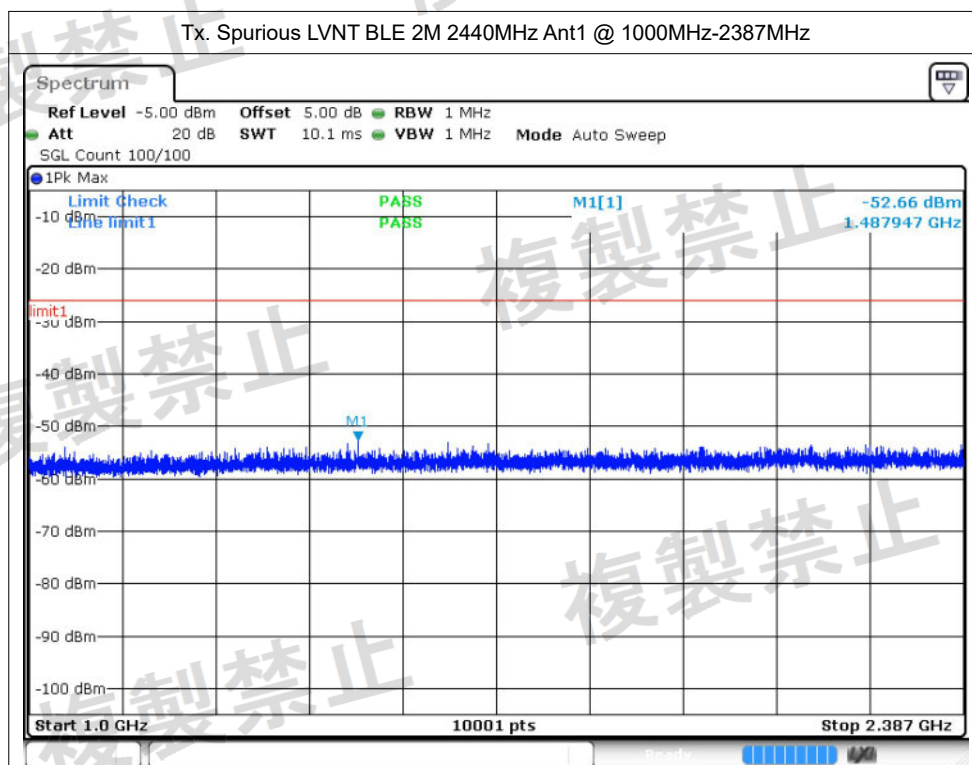


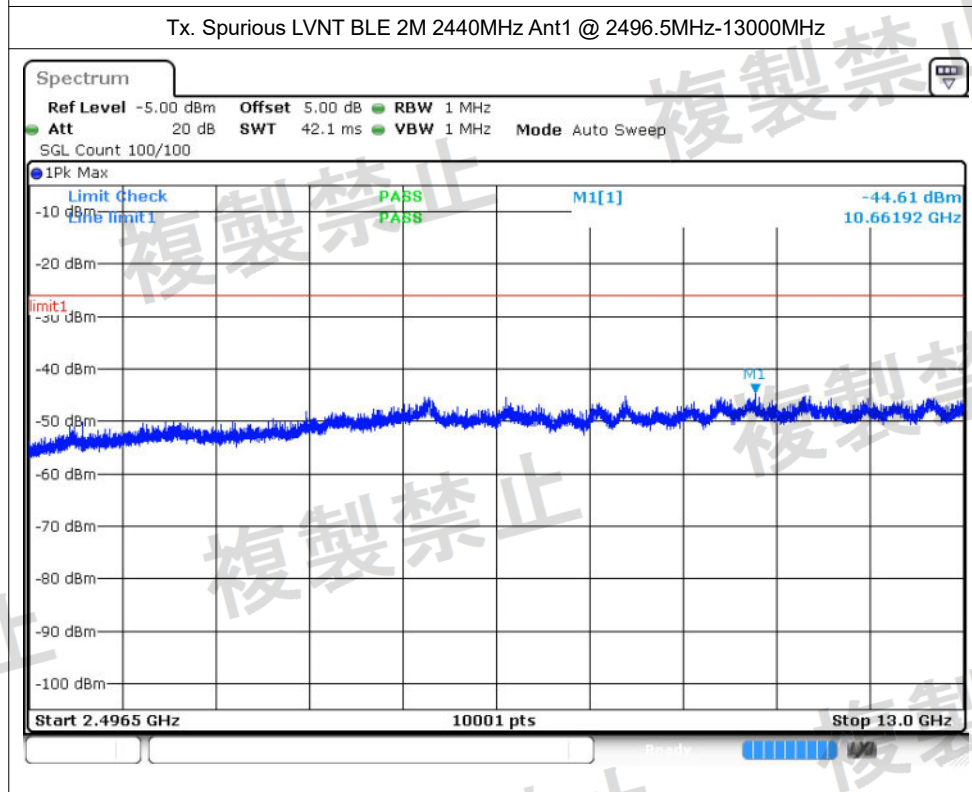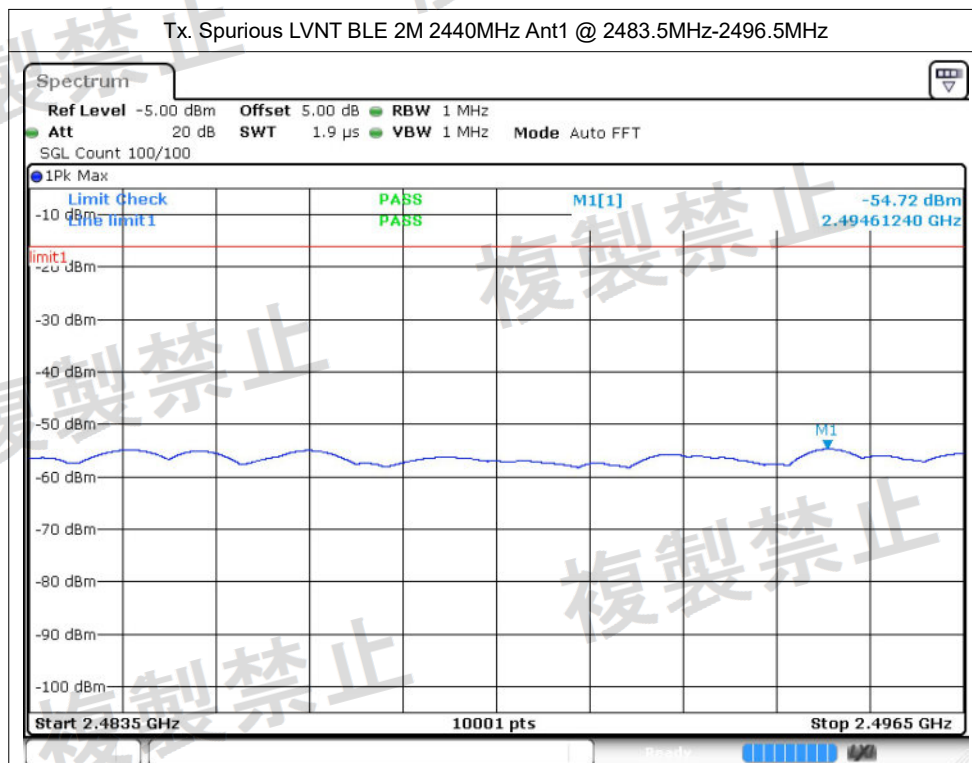


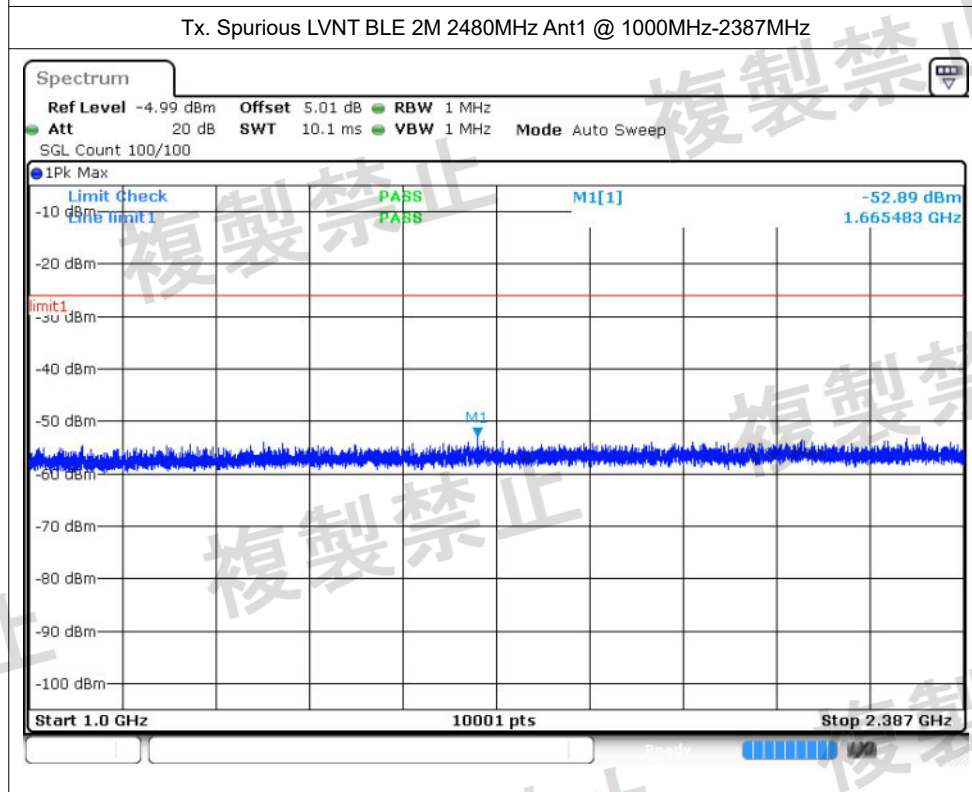
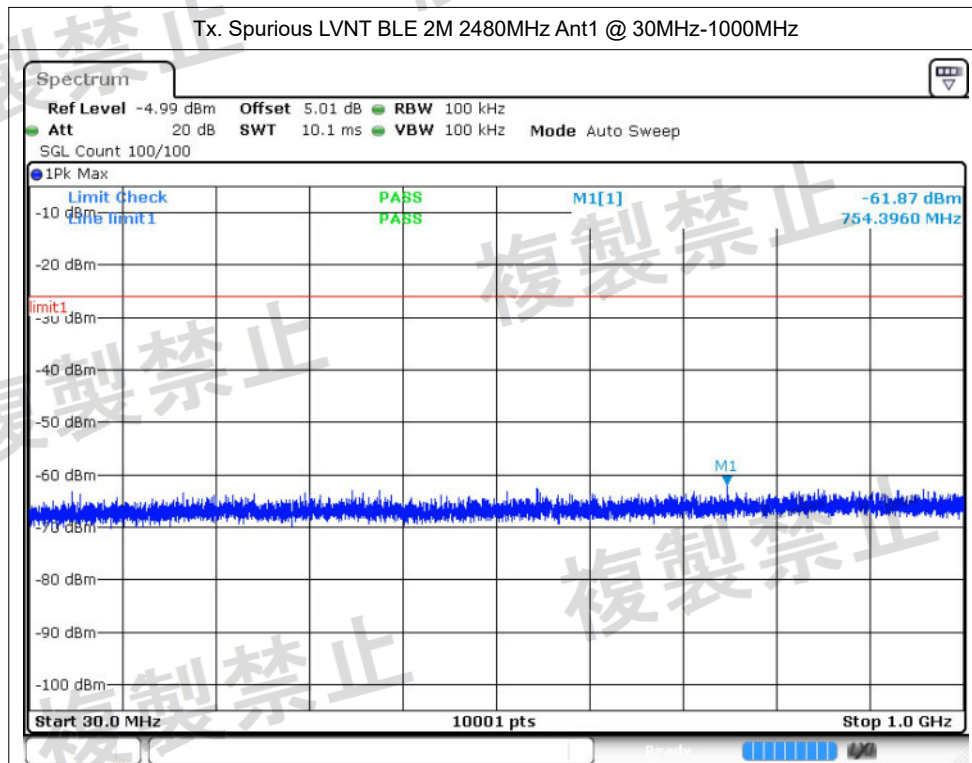


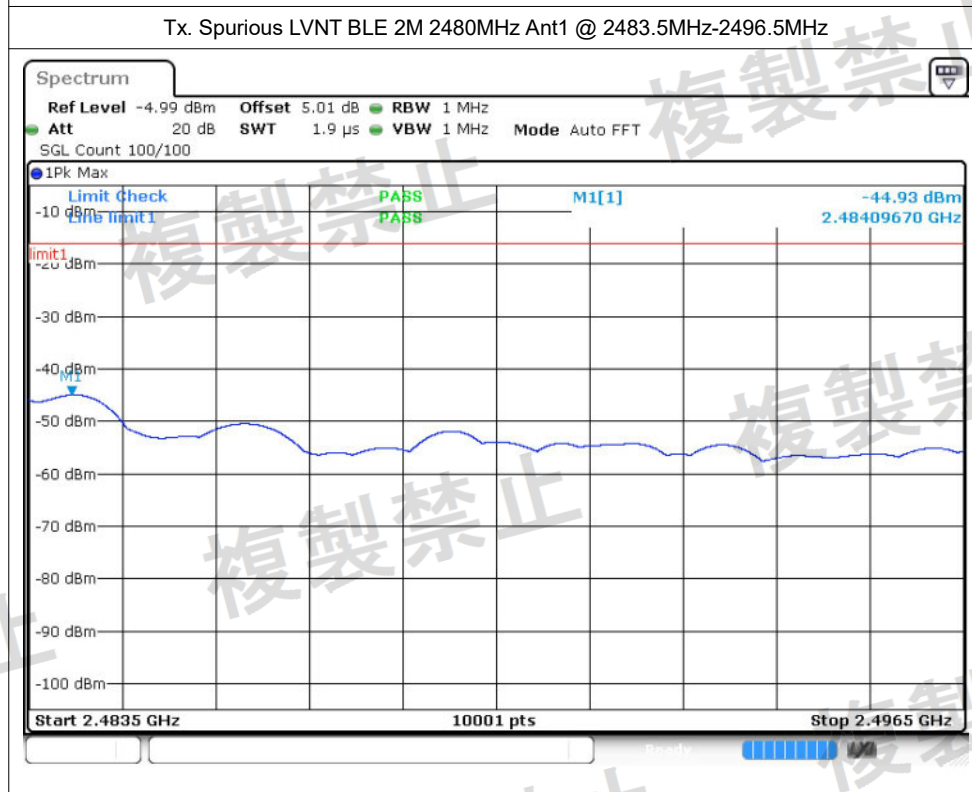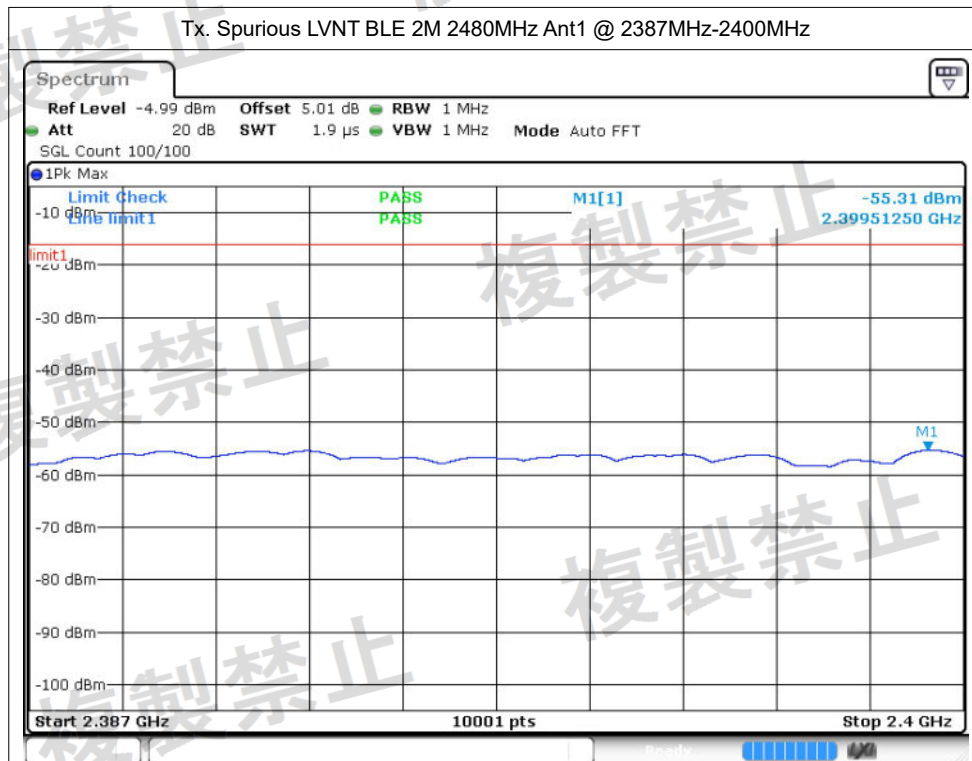



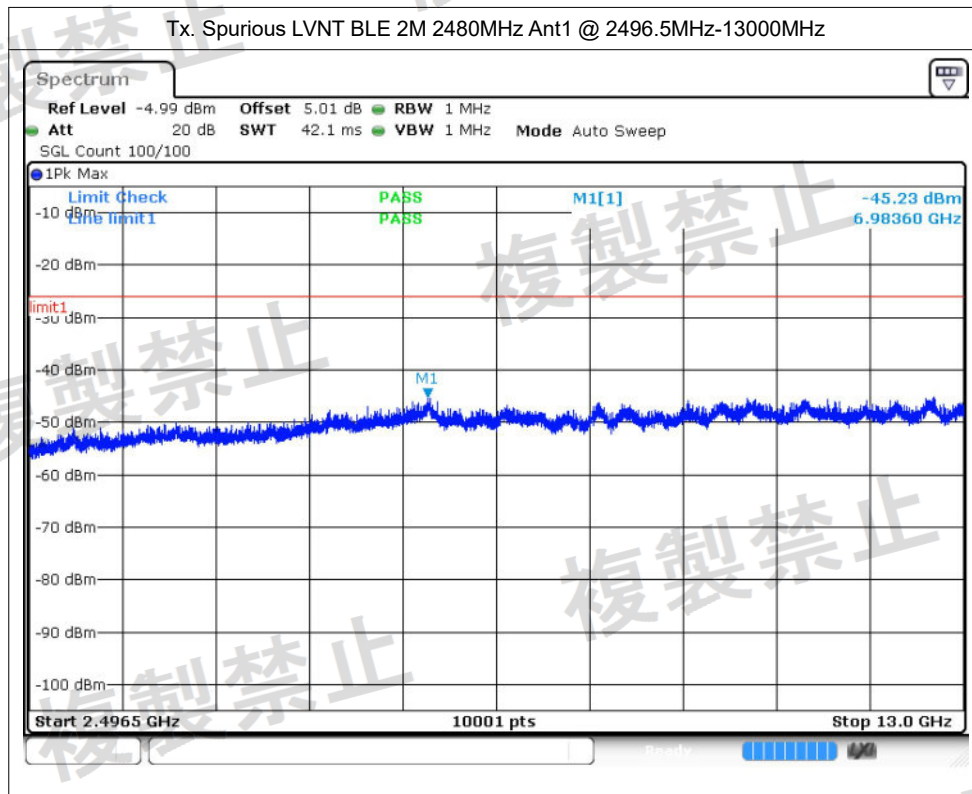


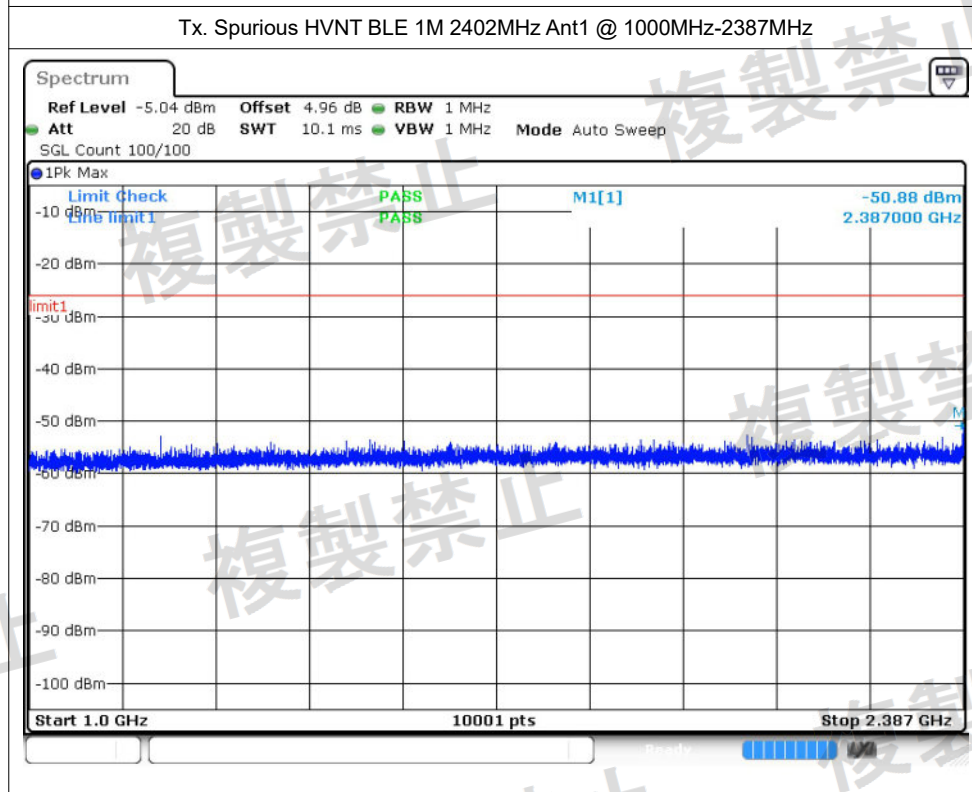
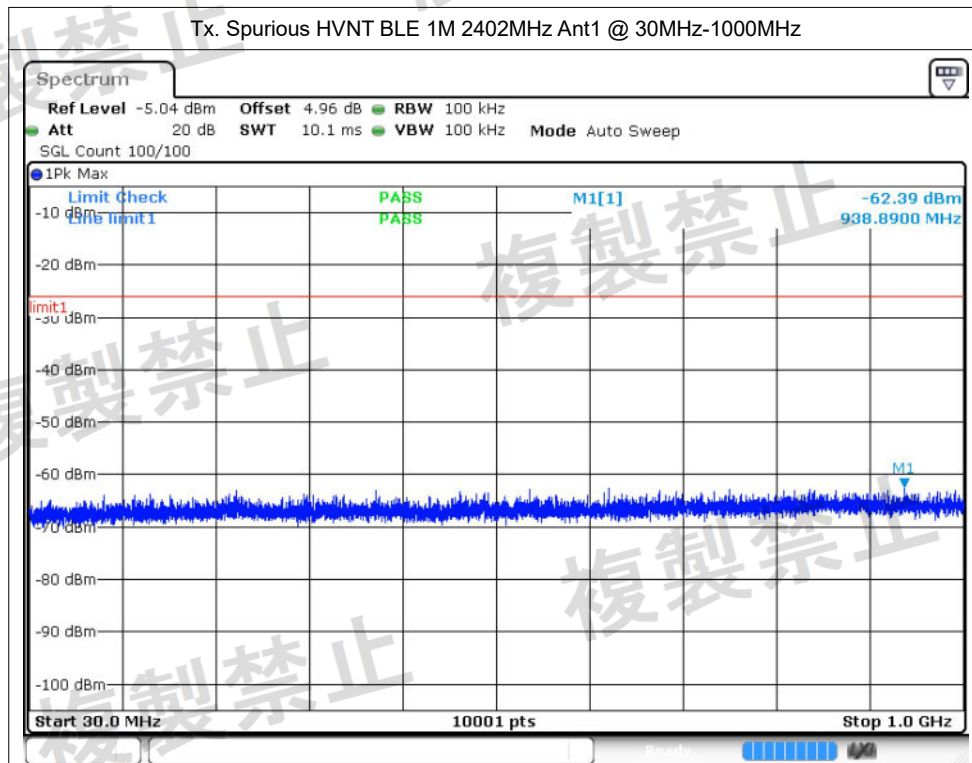


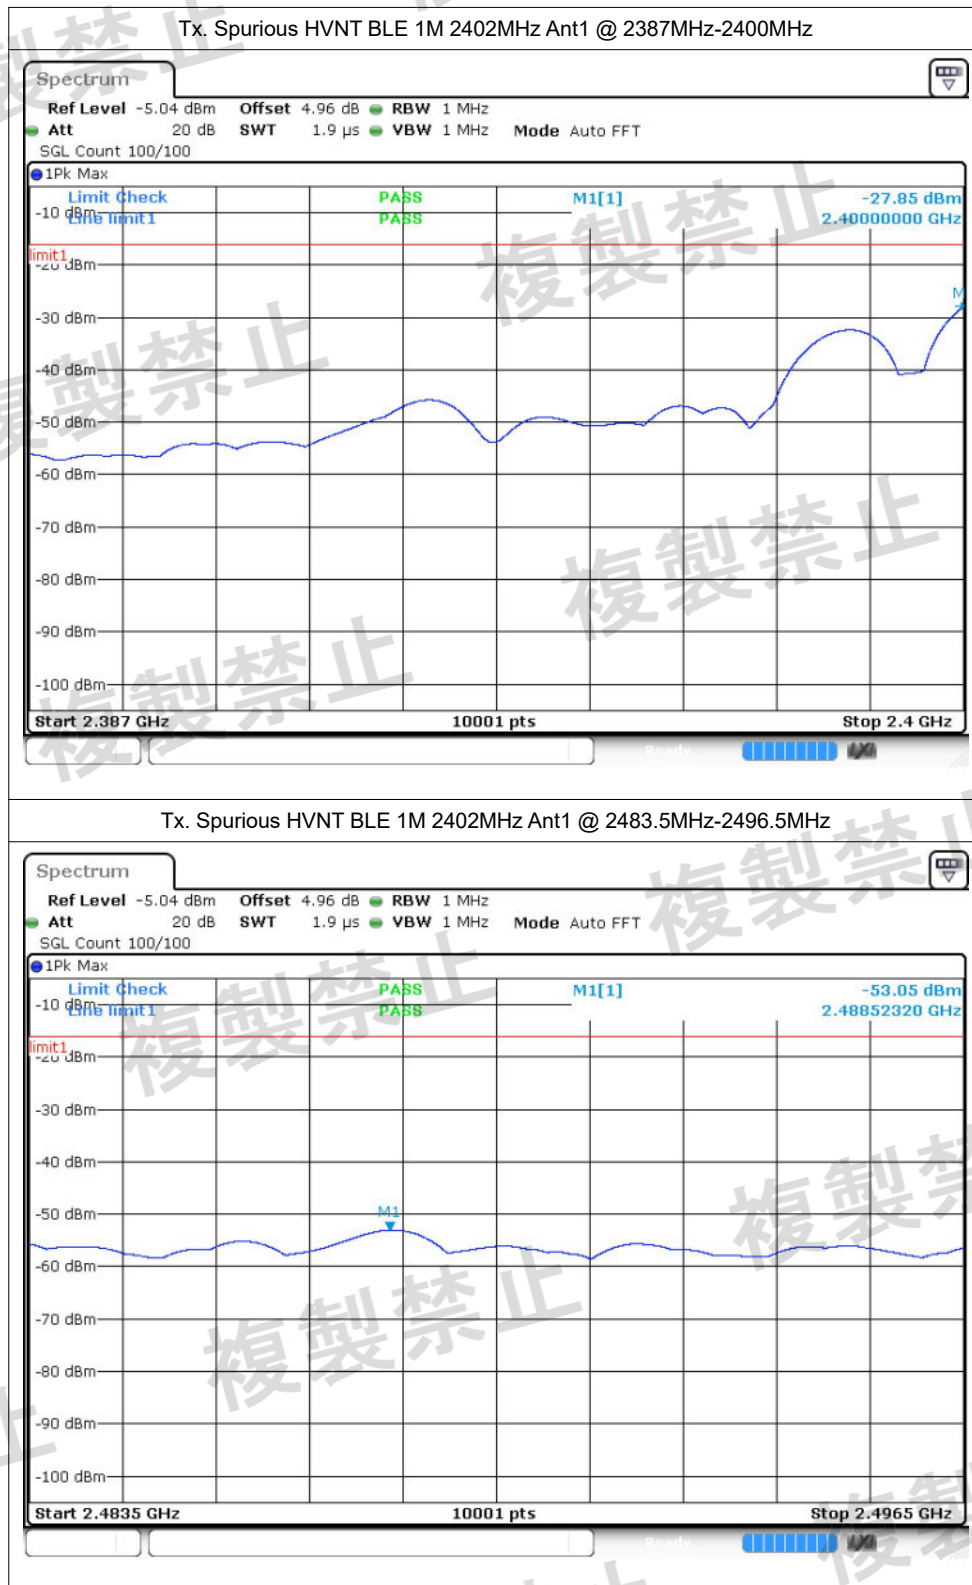


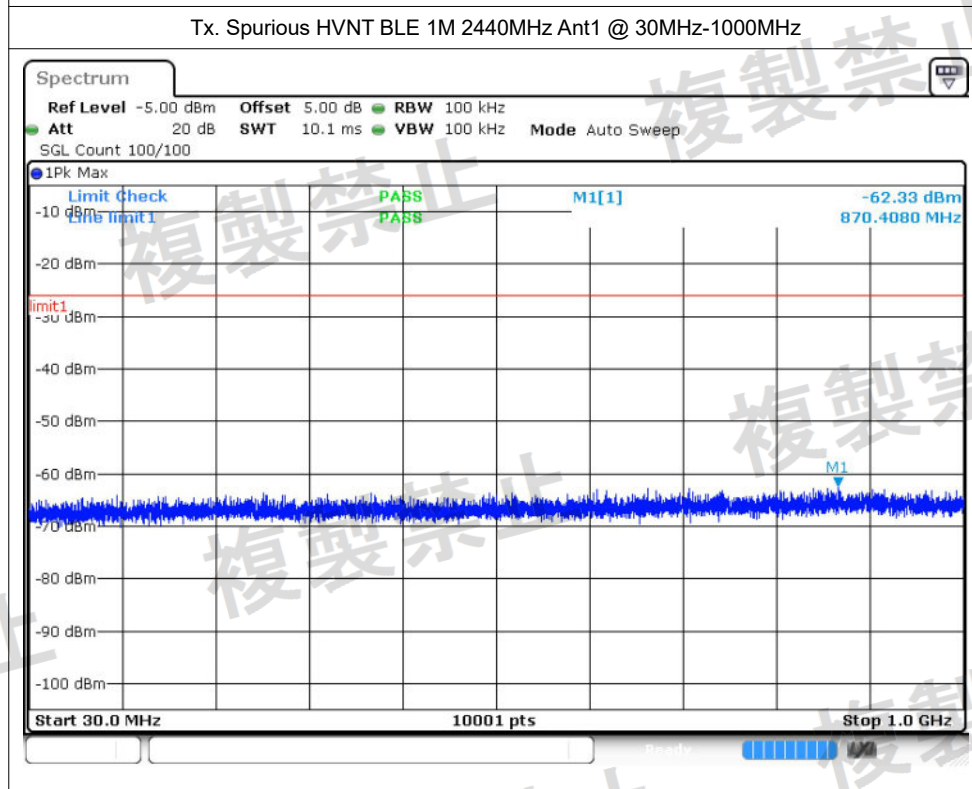
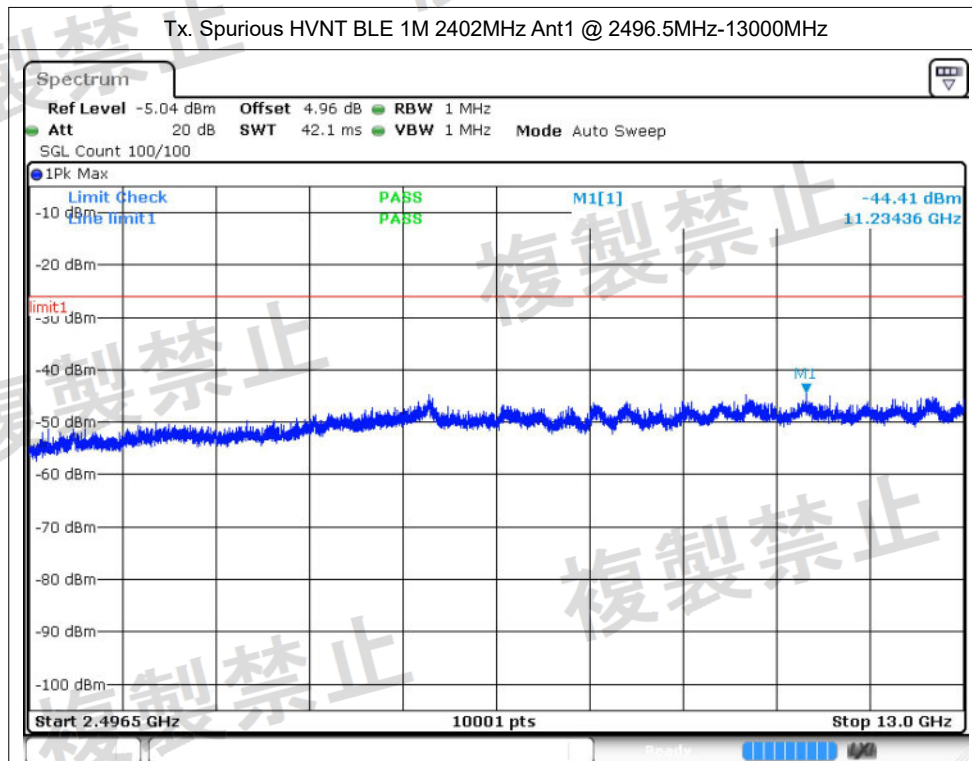


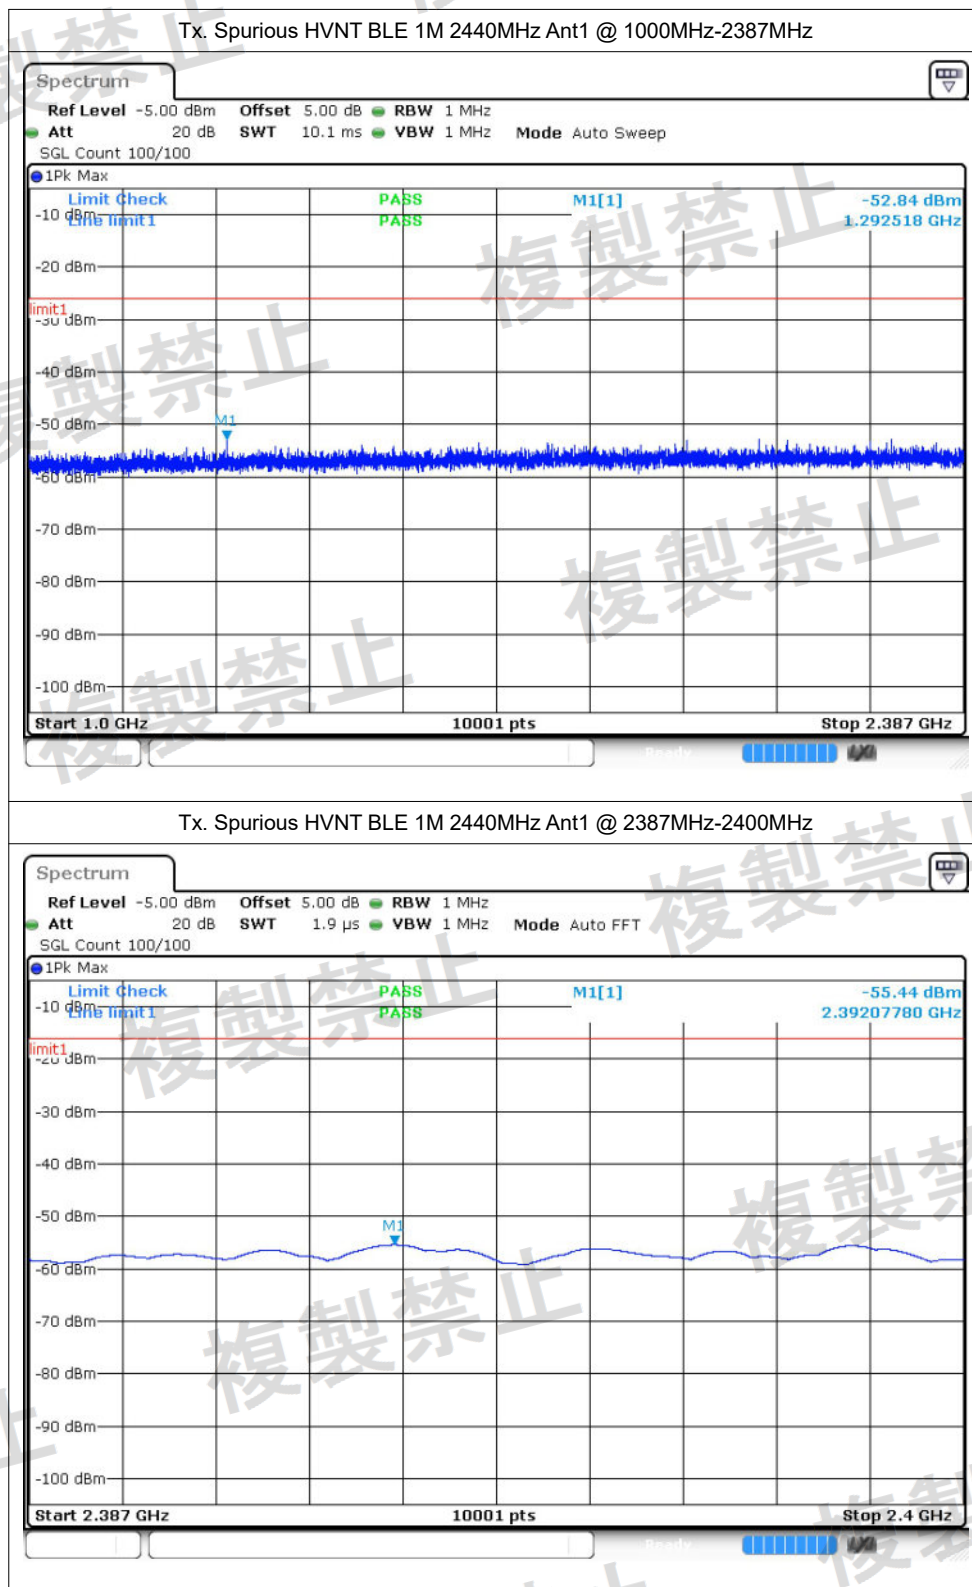


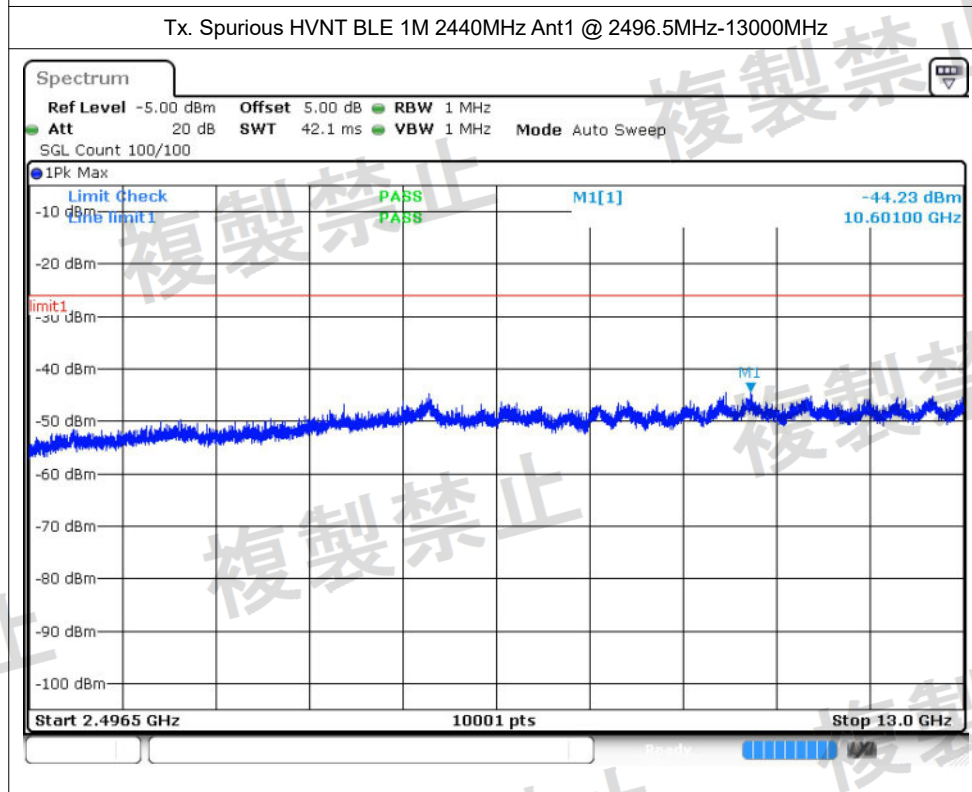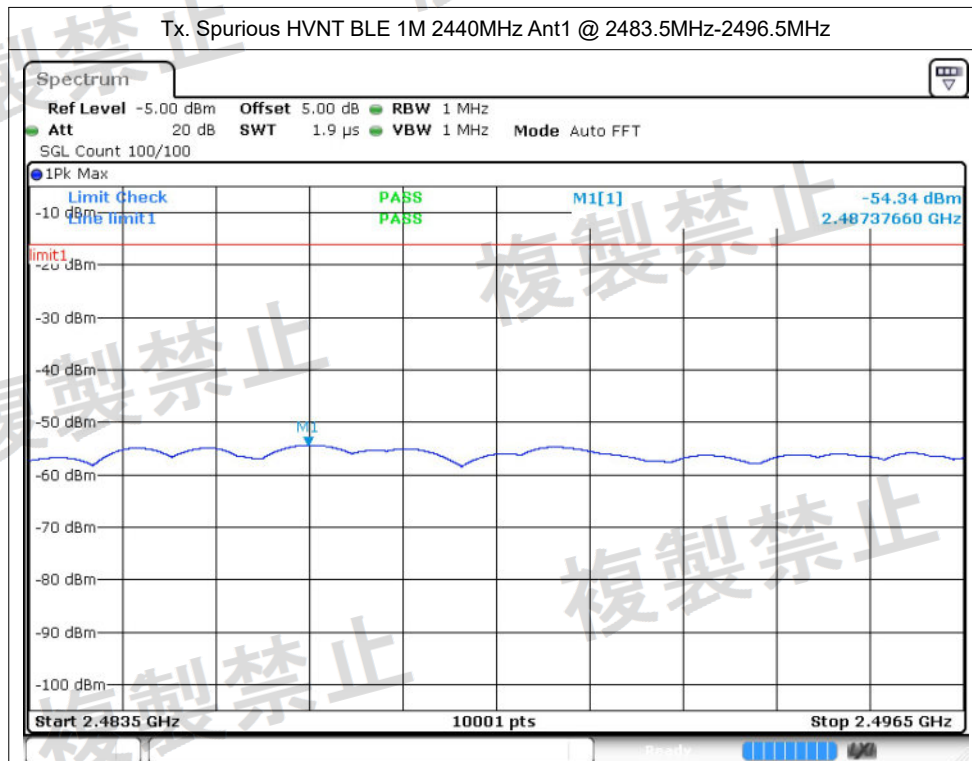


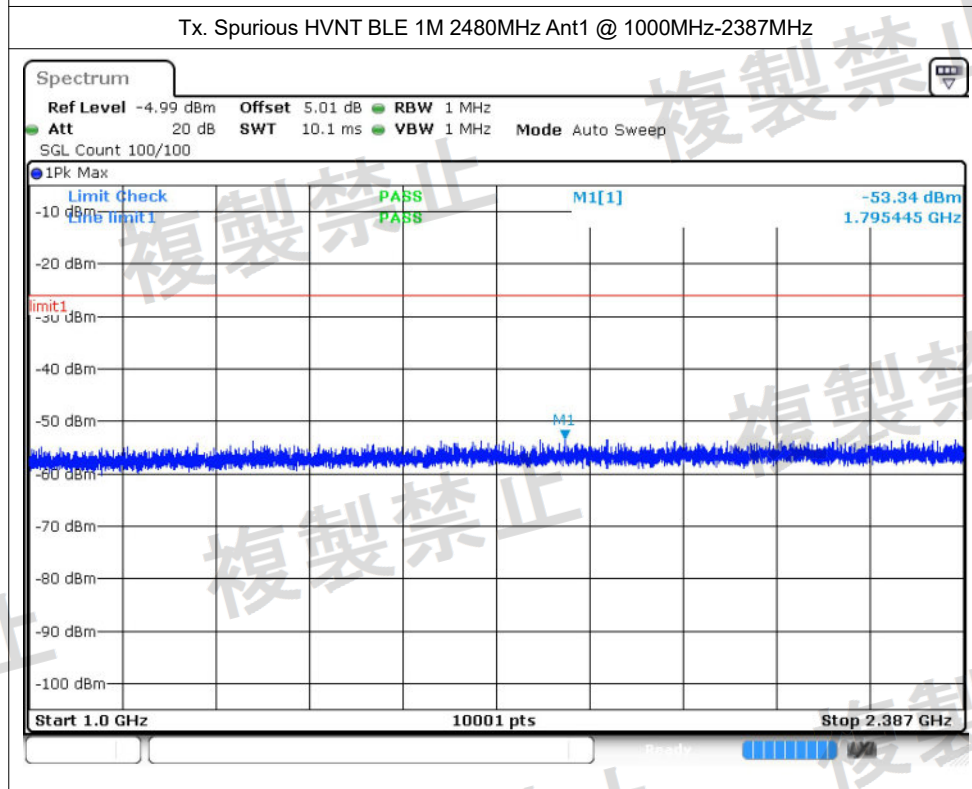
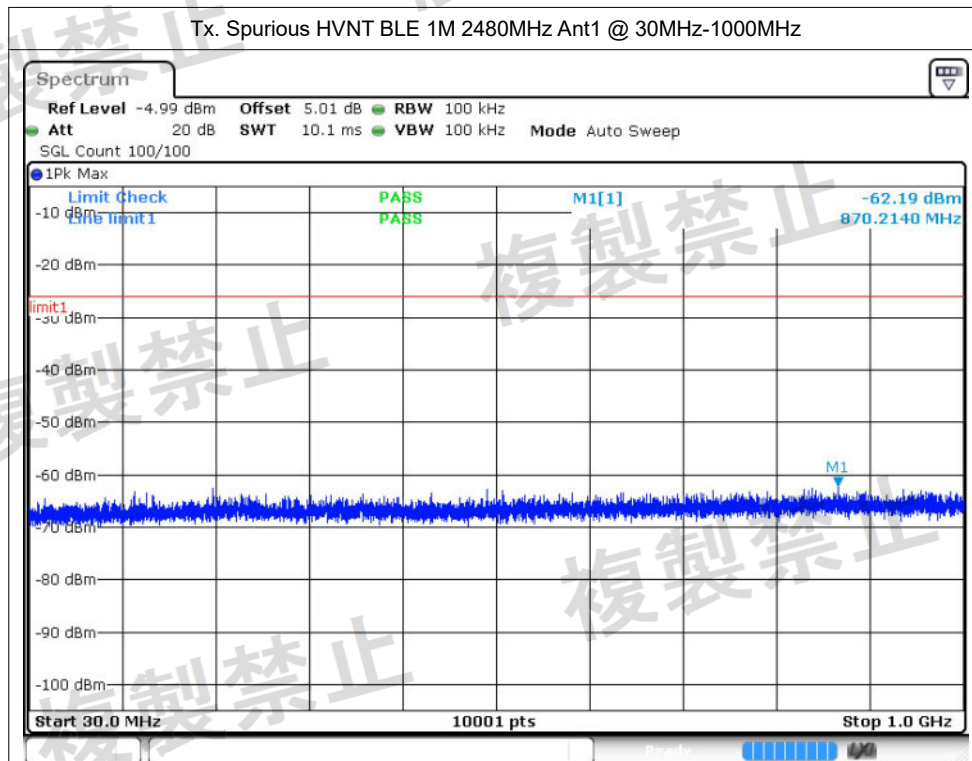



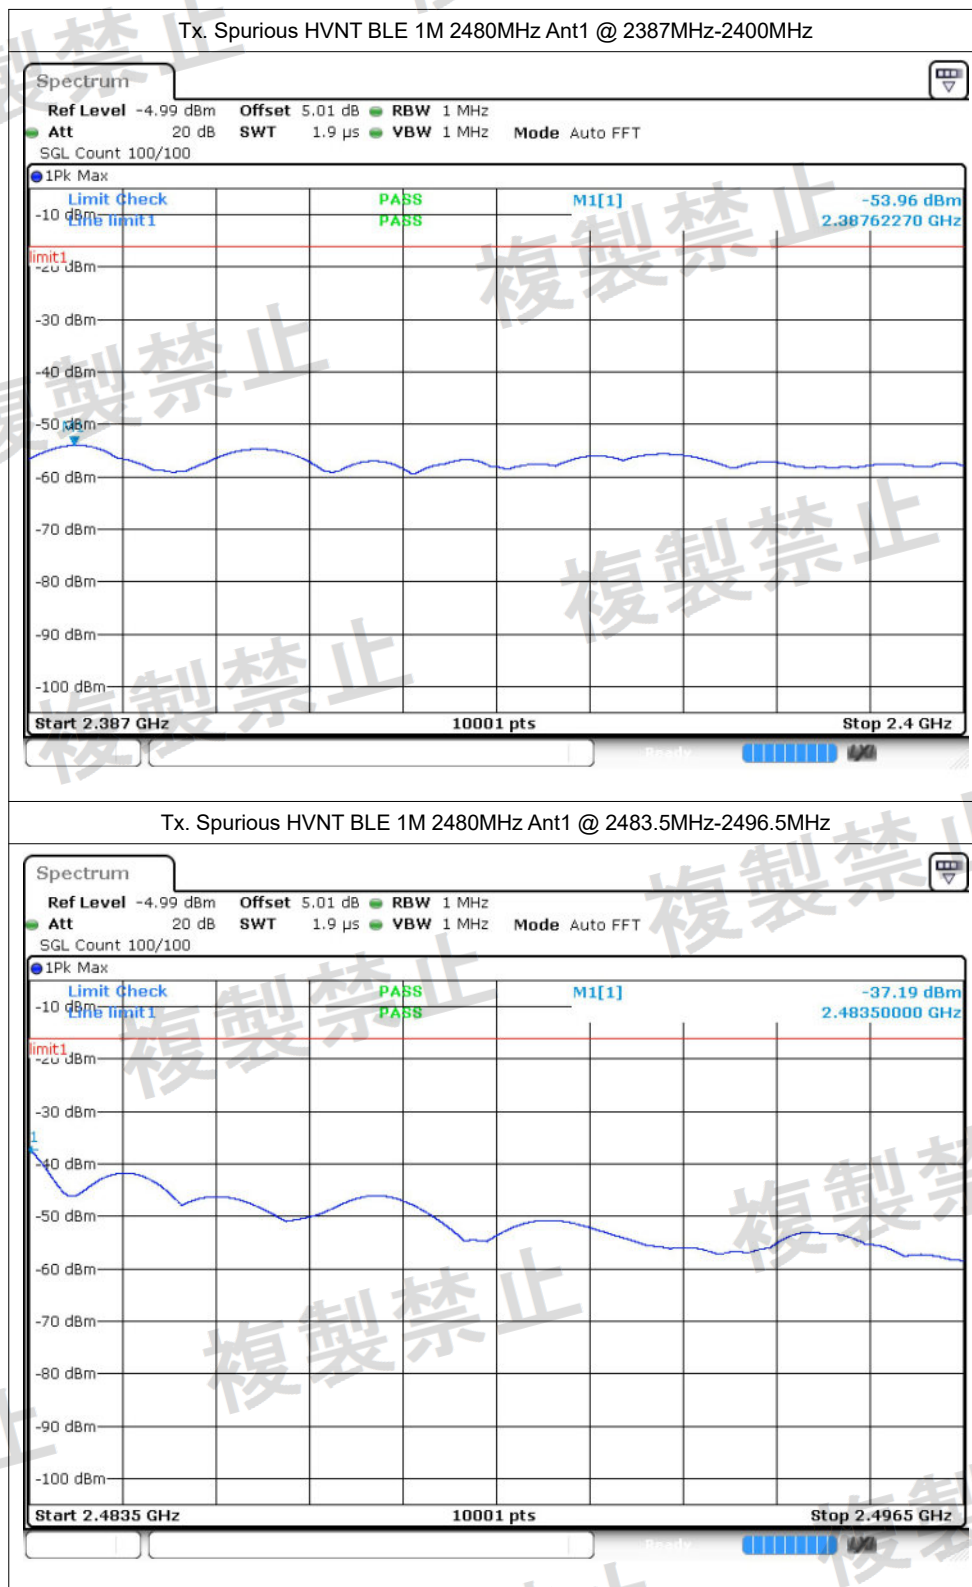


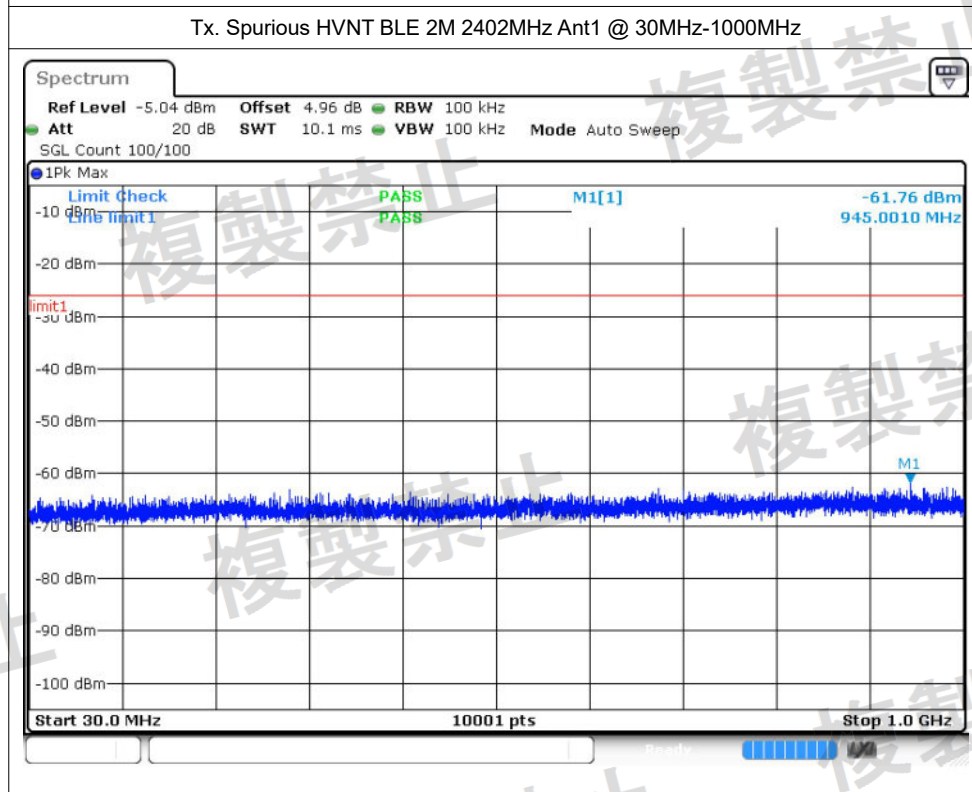
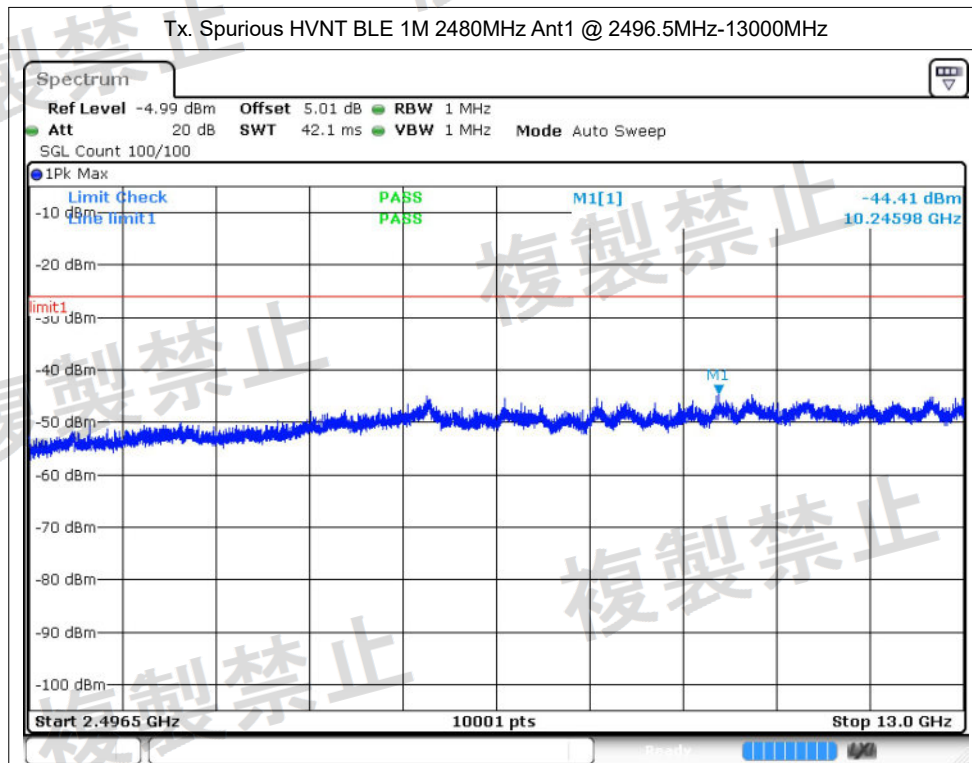



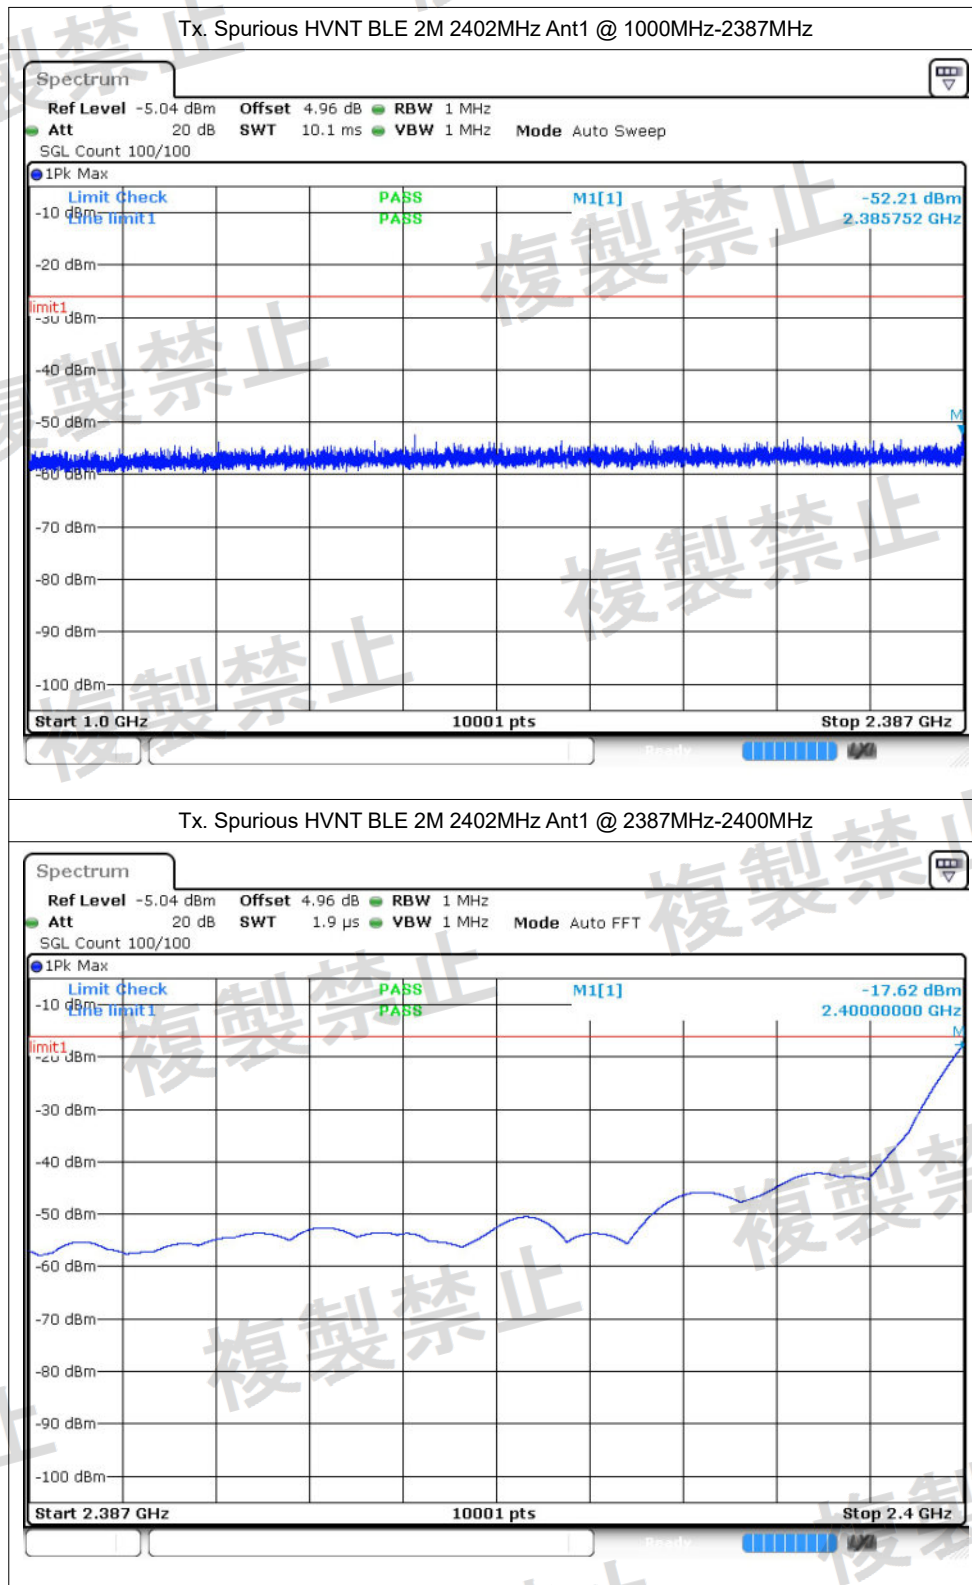



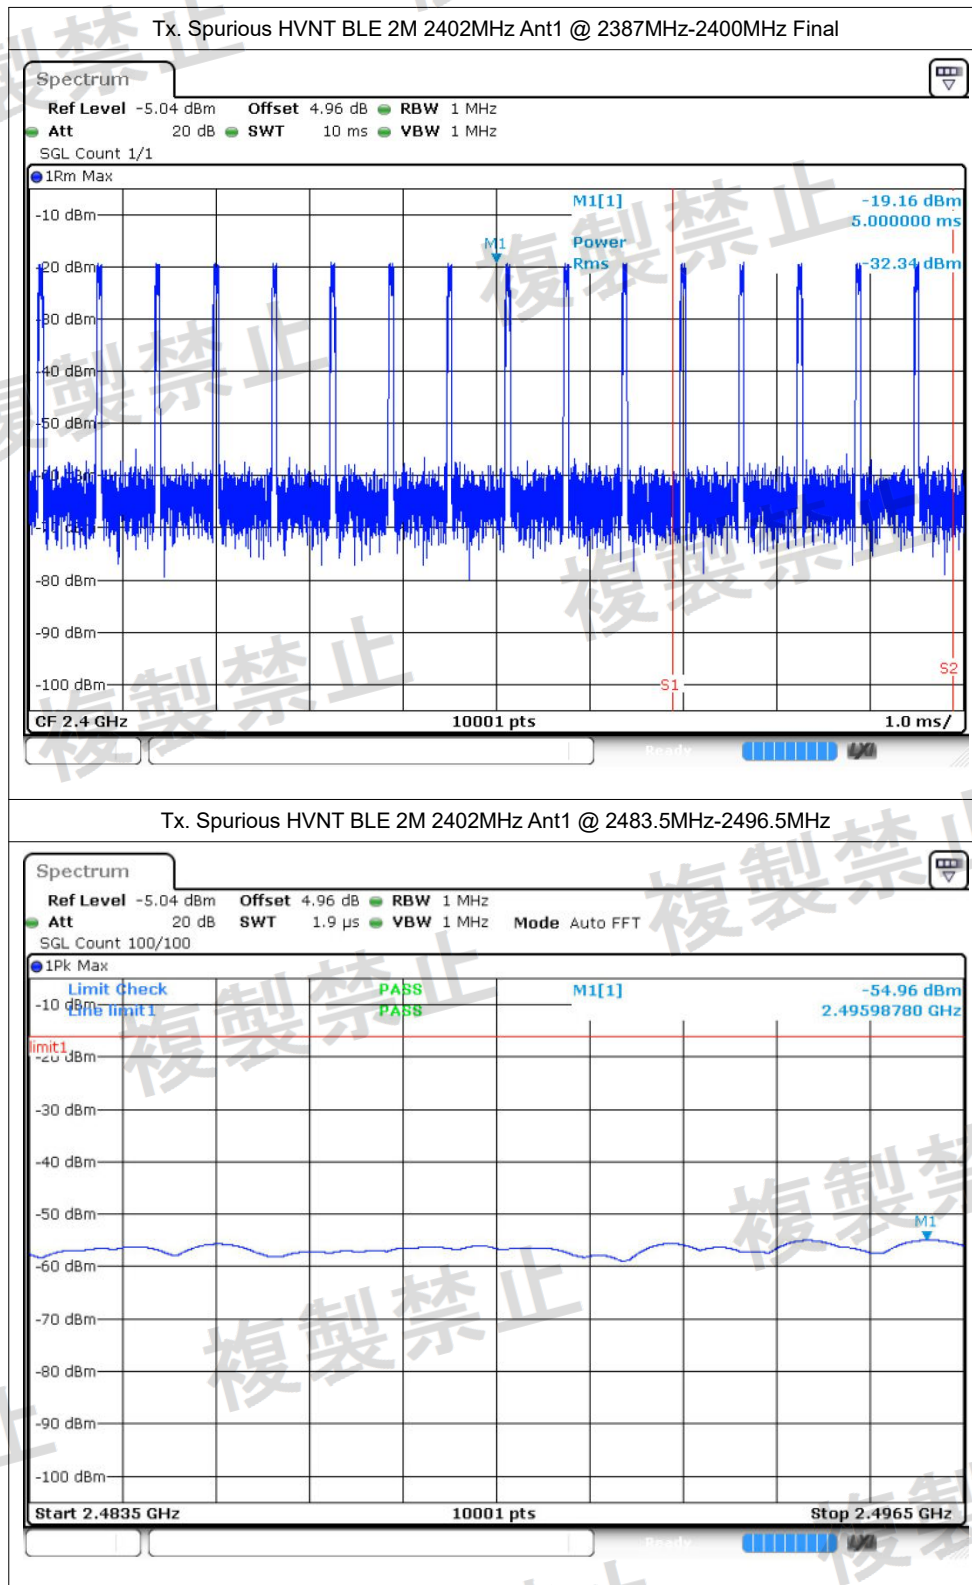


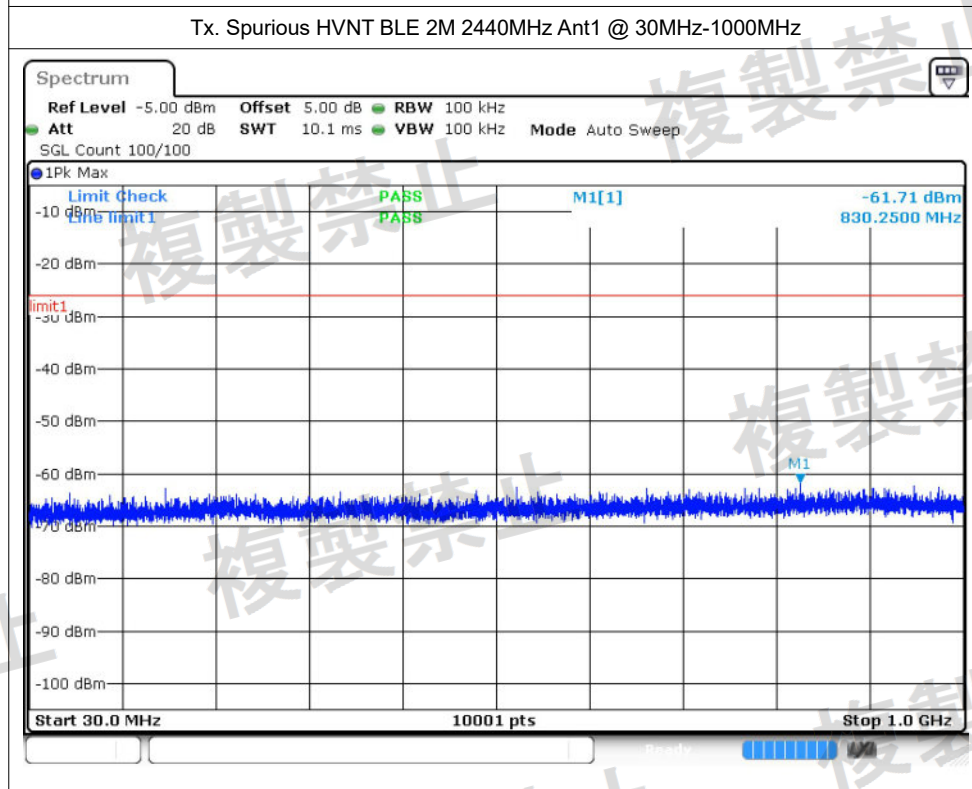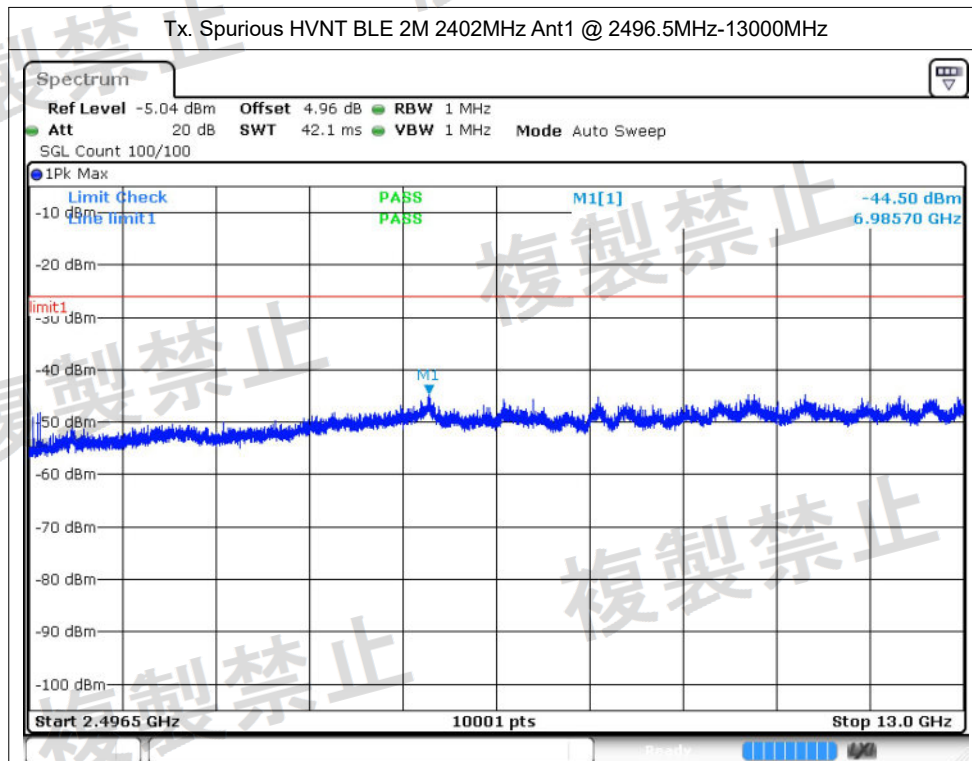


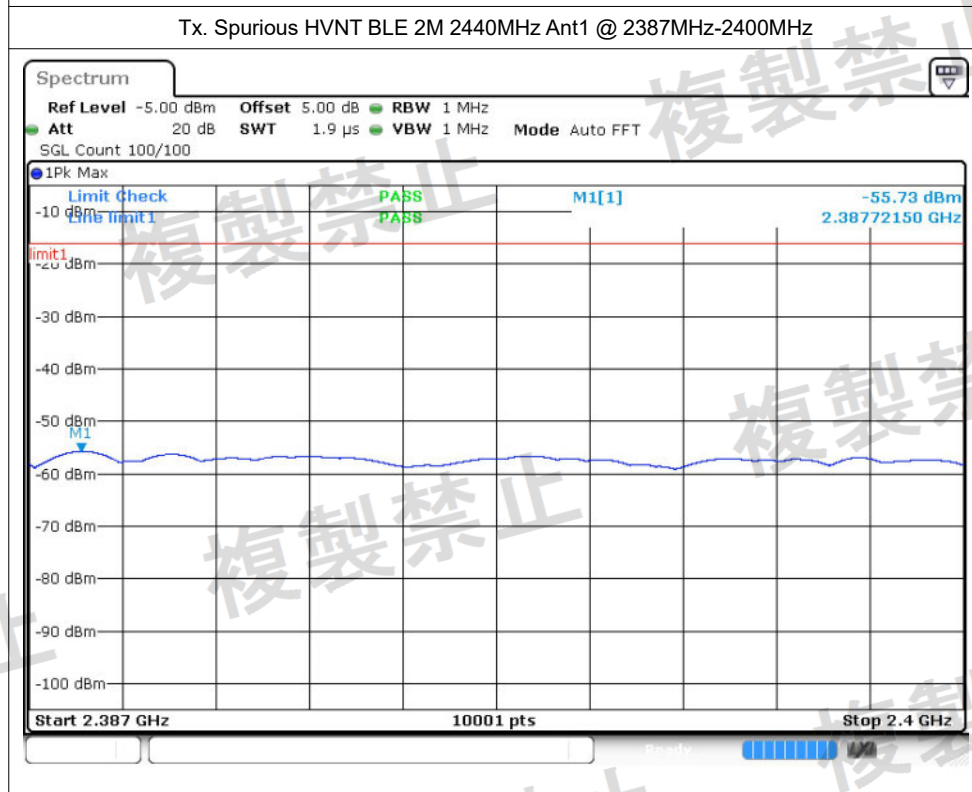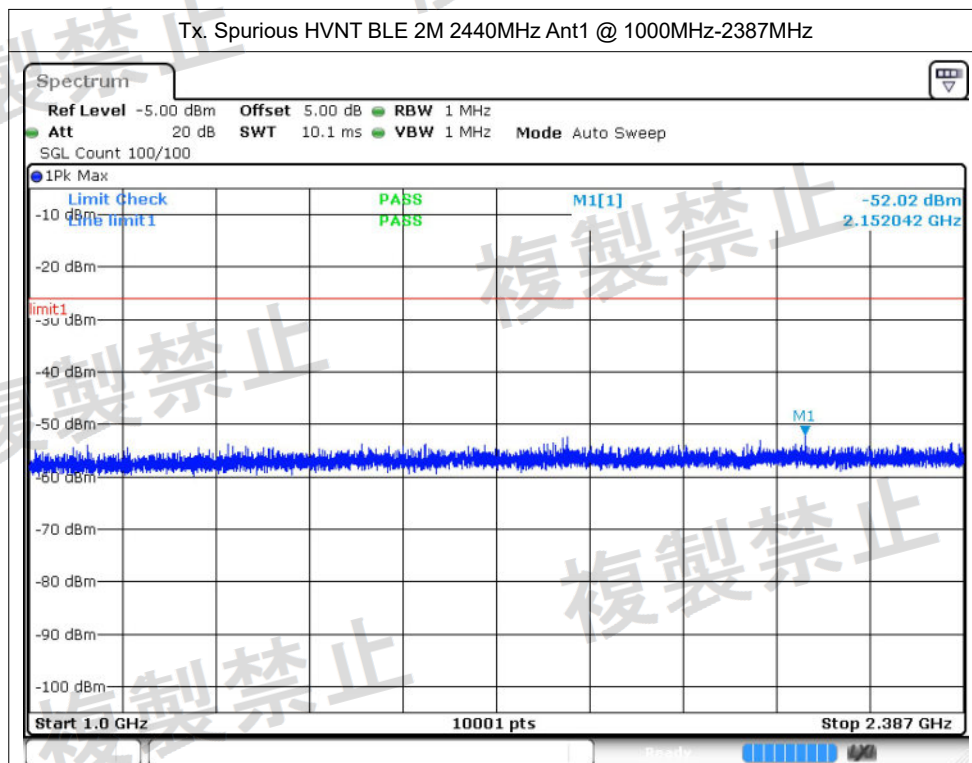

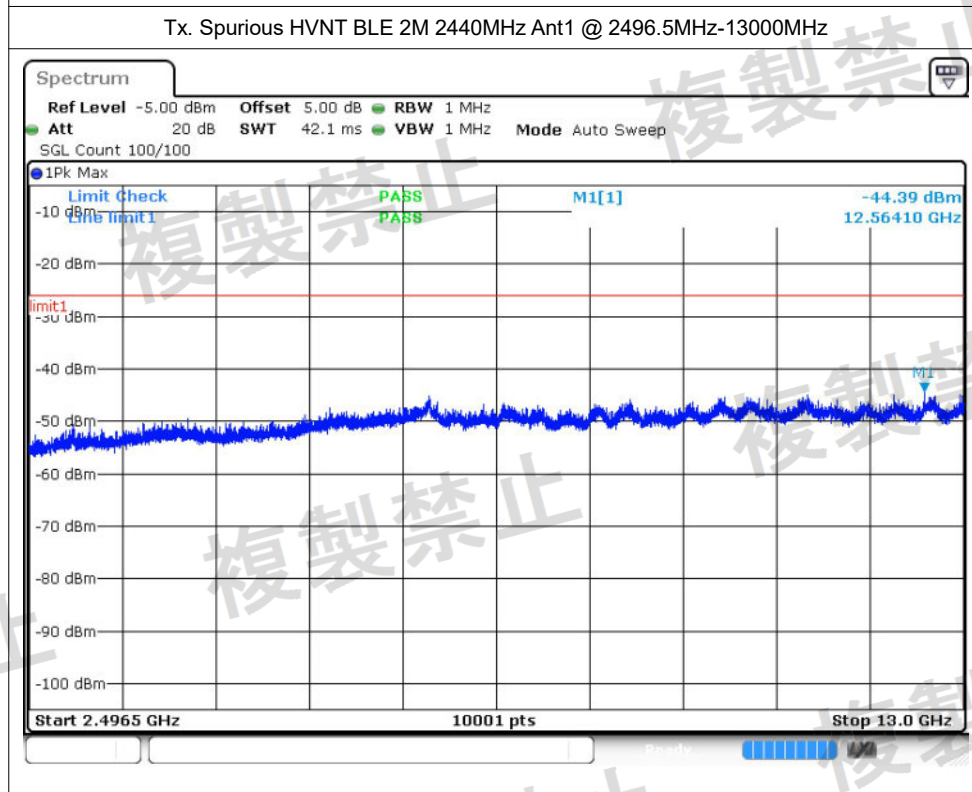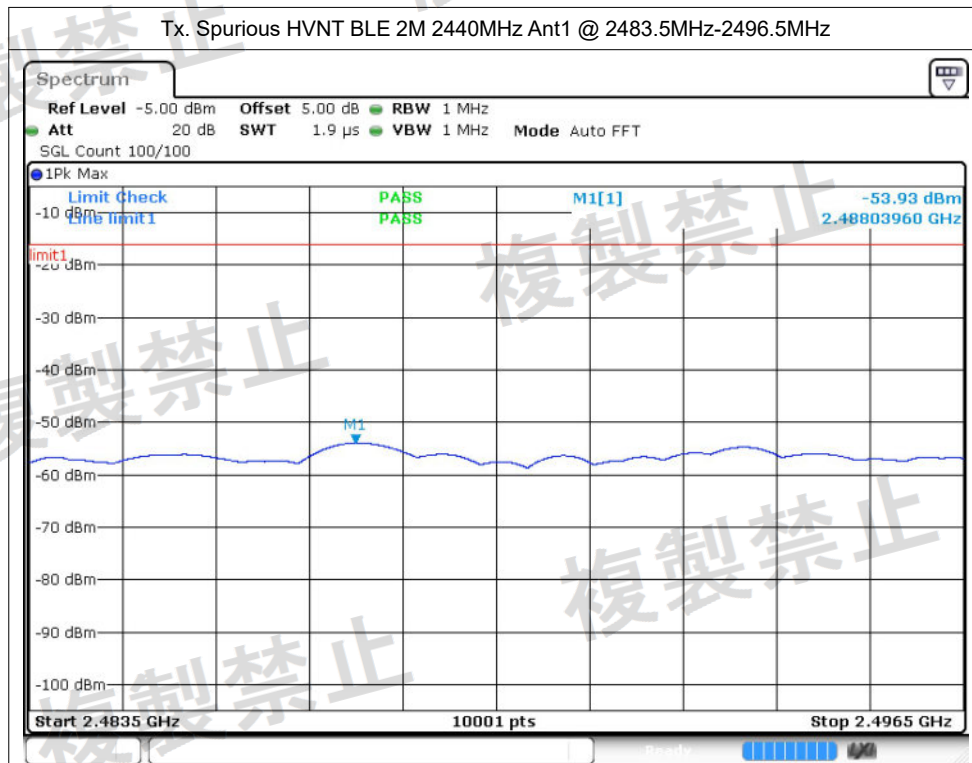

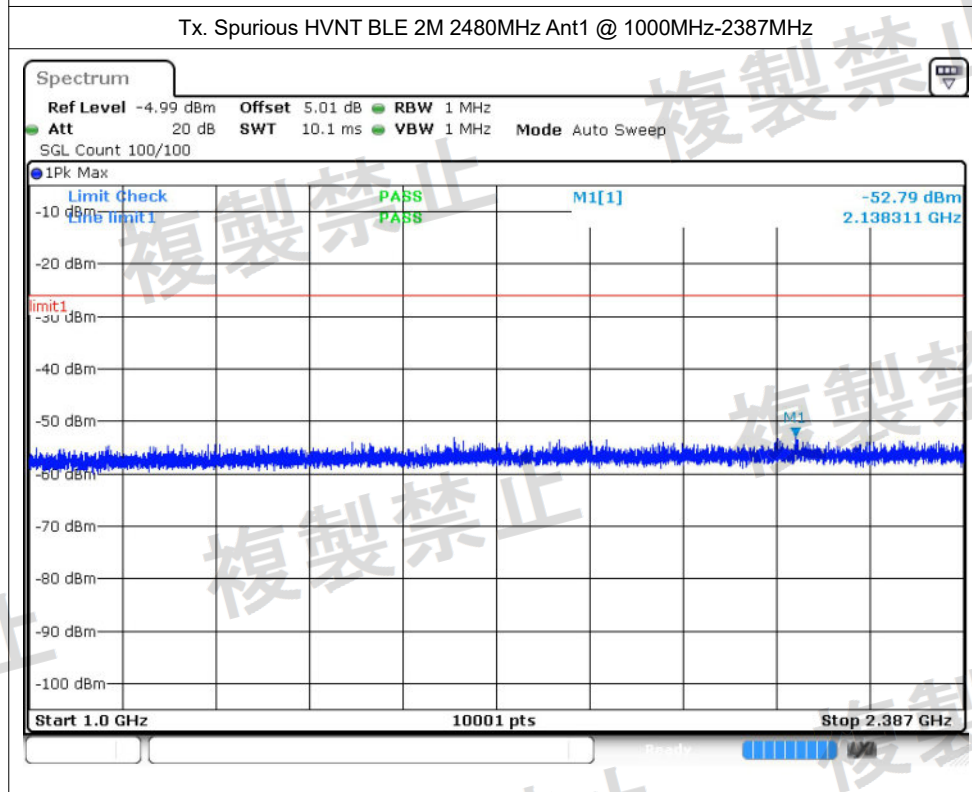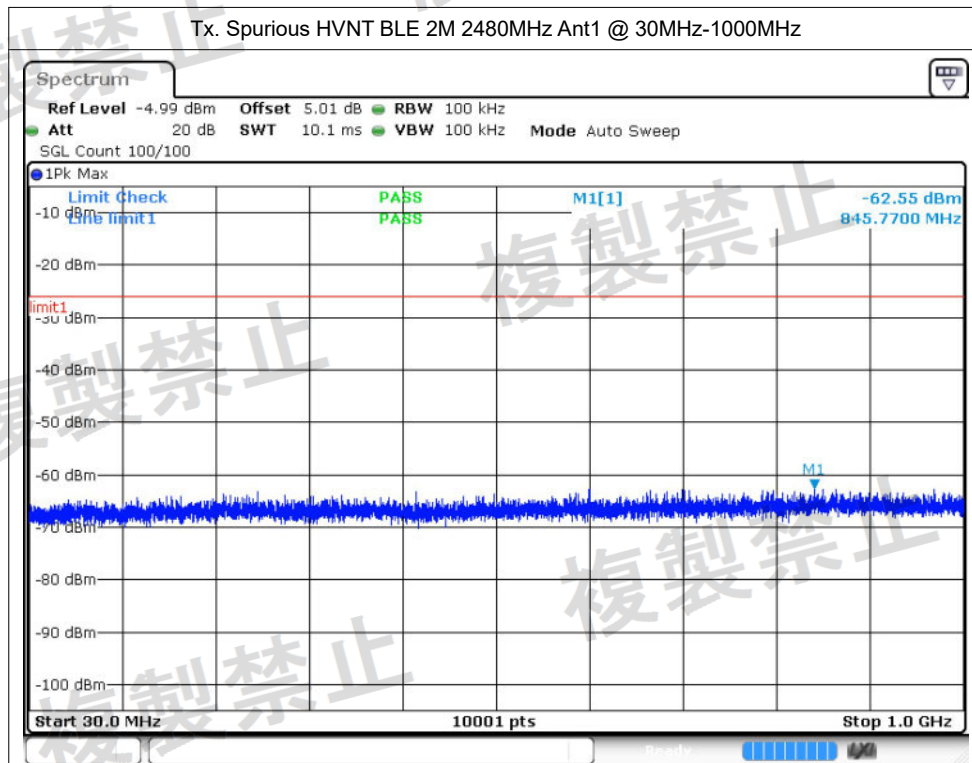

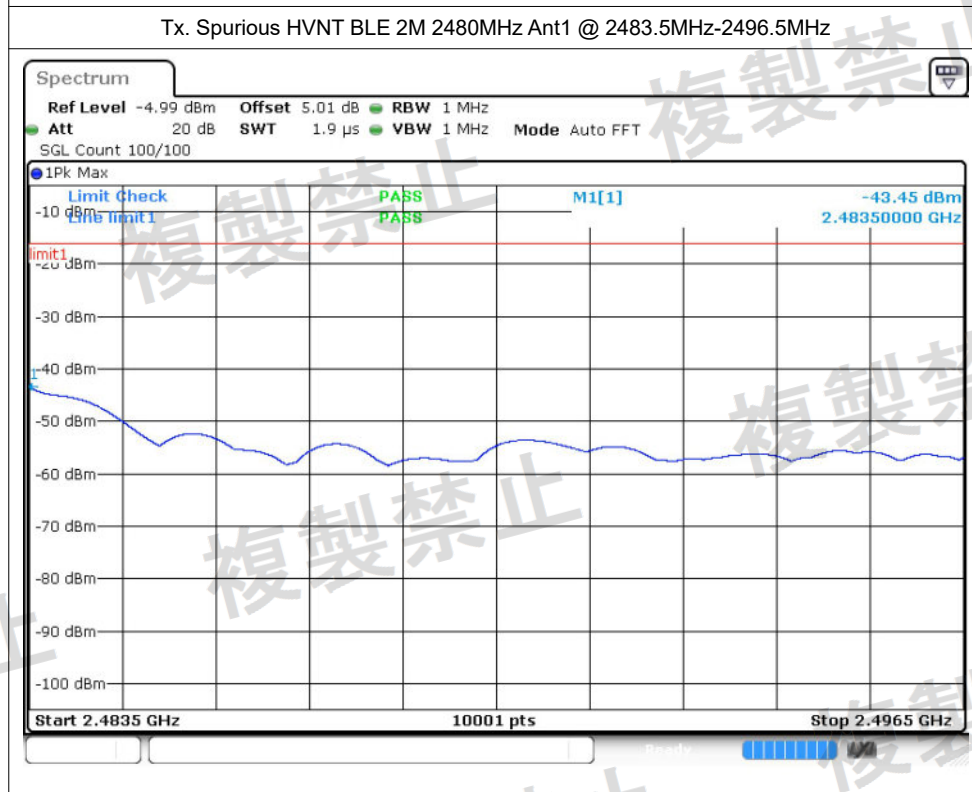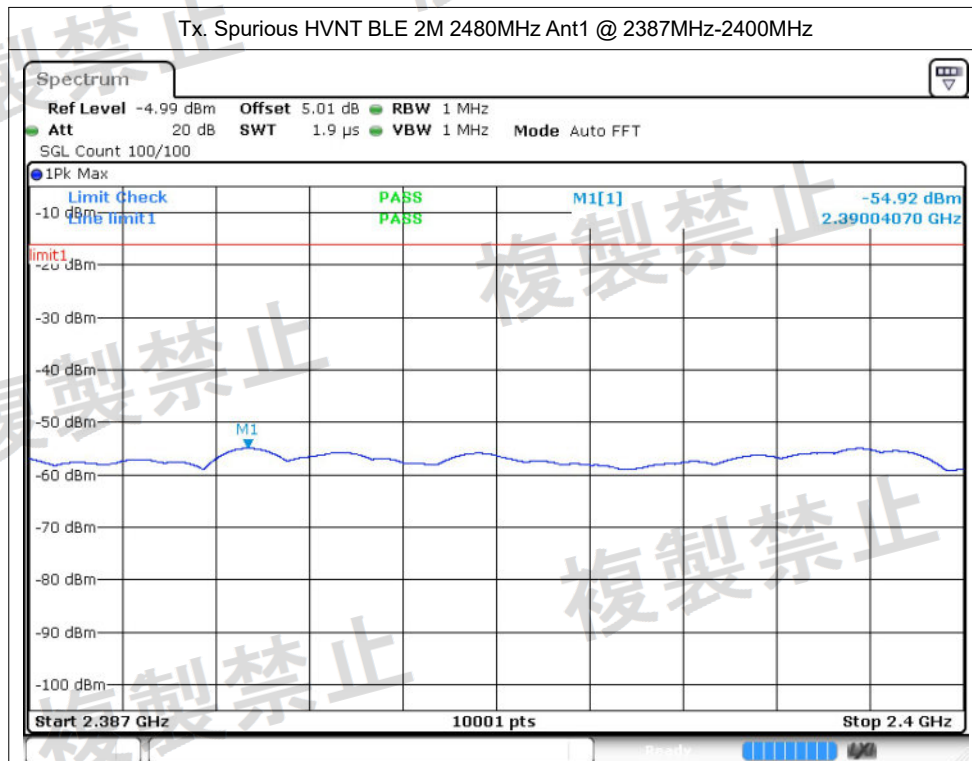

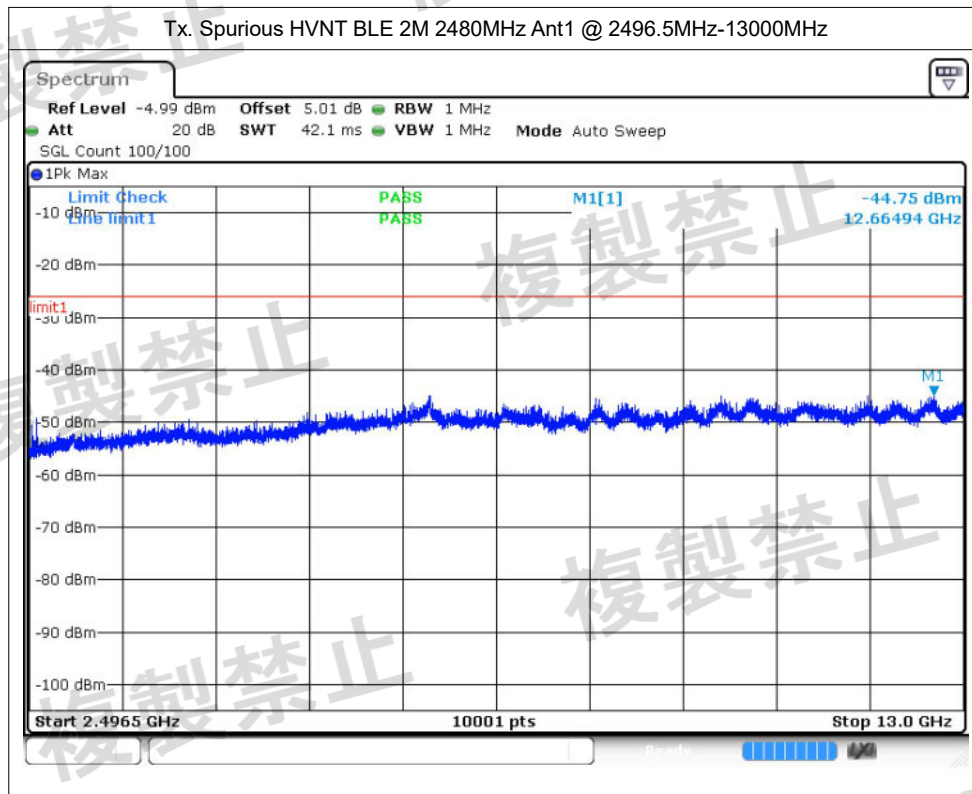


Rx Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Range (MHz)	Emission Frequency (MHz)	Max Peak Value (dBm)	Max RMS Value (dBm)	Max Peak Value (nW)	Max RMS Value (nW)	Limit (nW)	Verdict
NVNT	BLE 1M	2402	Ant1	30-1000	956.79	-82.35	NA	0.0058	NA	4	Pass
	BLE 1M	2402	Ant1	1000-13000	9203.00	-64.94	NA	0.3206	NA	20	Pass
	BLE 2M	2402	Ant1	30-1000	168.07	-81.11	NA	0.0077	NA	4	Pass
	BLE 2M	2402	Ant1	1000-13000	2442.90	-54.84	-56.02	3.281	2.5003	20	Pass
LVNT	BLE 1M	2402	Ant1	30-1000	805.39	-81.58	NA	0.007	NA	4	Pass
	BLE 1M	2402	Ant1	1000-13000	6980.80	-65.34	NA	0.2924	NA	20	Pass
	BLE 2M	2402	Ant1	30-1000	48.09	-80.68	NA	0.0086	NA	4	Pass
	BLE 2M	2402	Ant1	1000-13000	12638.20	-65.07	NA	0.3112	NA	20	Pass
HVNT	BLE 1M	2402	Ant1	30-1000	48.09	-81.70	NA	0.0068	NA	4	Pass
	BLE 1M	2402	Ant1	1000-13000	10581.60	-64.46	NA	0.3581	NA	20	Pass
	BLE 2M	2402	Ant1	30-1000	47.99	-81.14	NA	0.0077	NA	4	Pass
	BLE 2M	2402	Ant1	1000-13000	2522.00	-54.72	-58.38	3.3729	1.4521	20	Pass



Test Graphs


Rx. Spurious NVNT BLE 1M 2402MHz Ant1 @ 30MHz-1000MHz

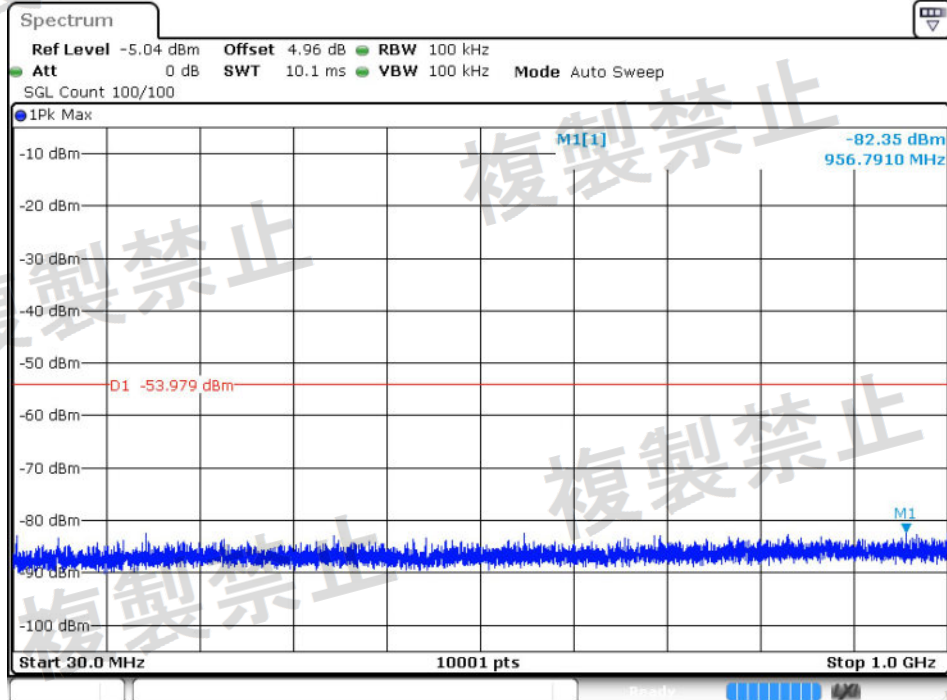



Rx. Spurious NVNT BLE 1M 2402MHz Ant1 @ 1000MHz-13000MHz

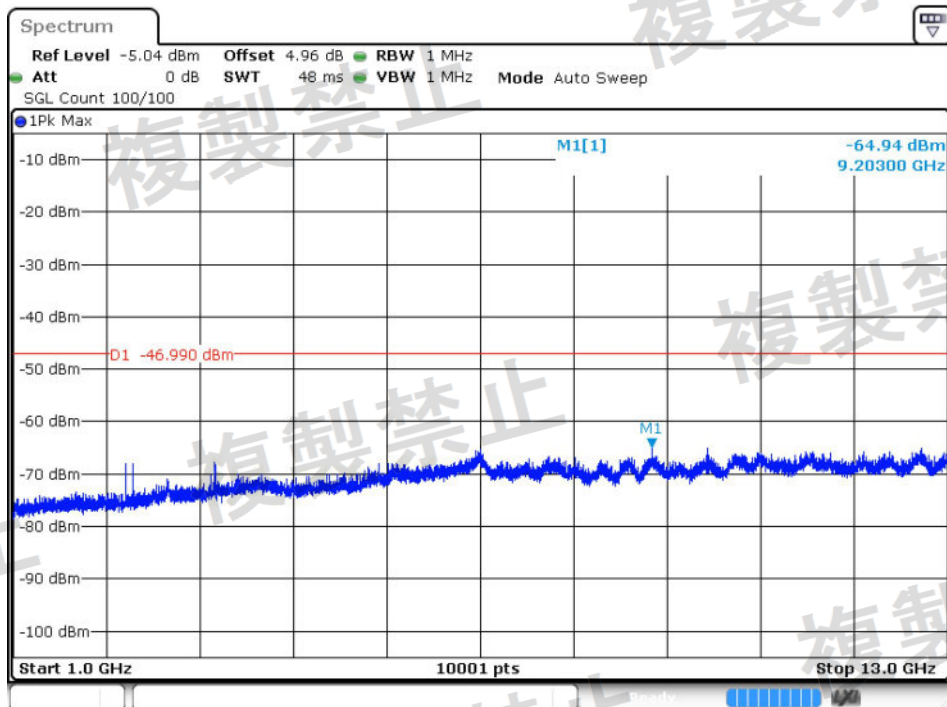


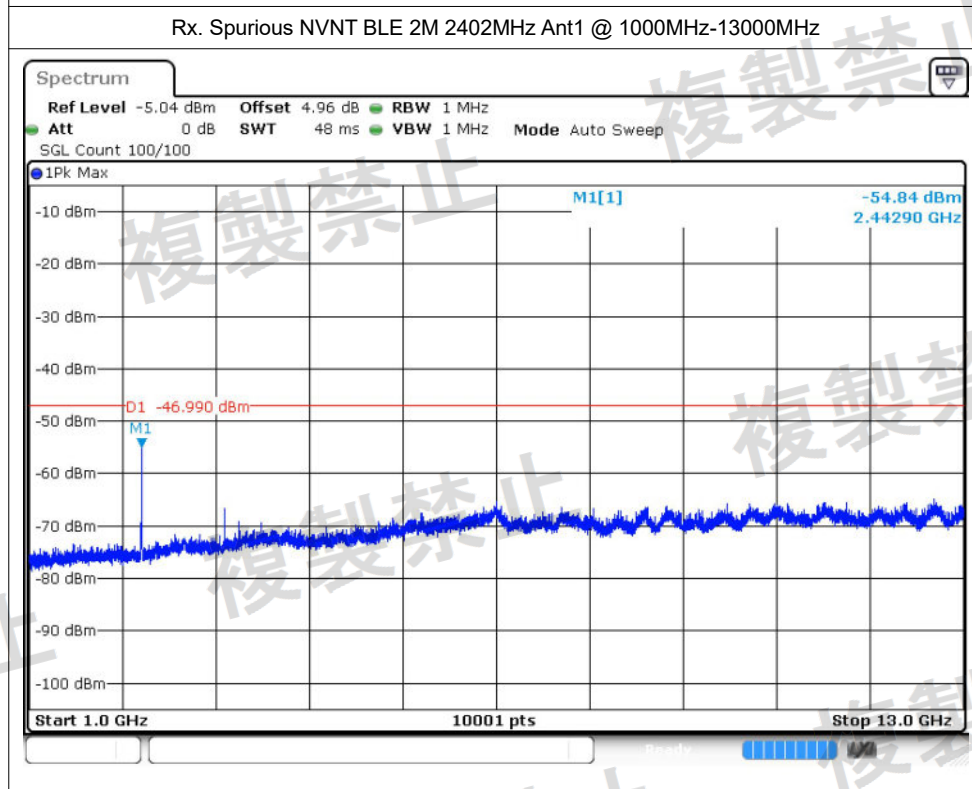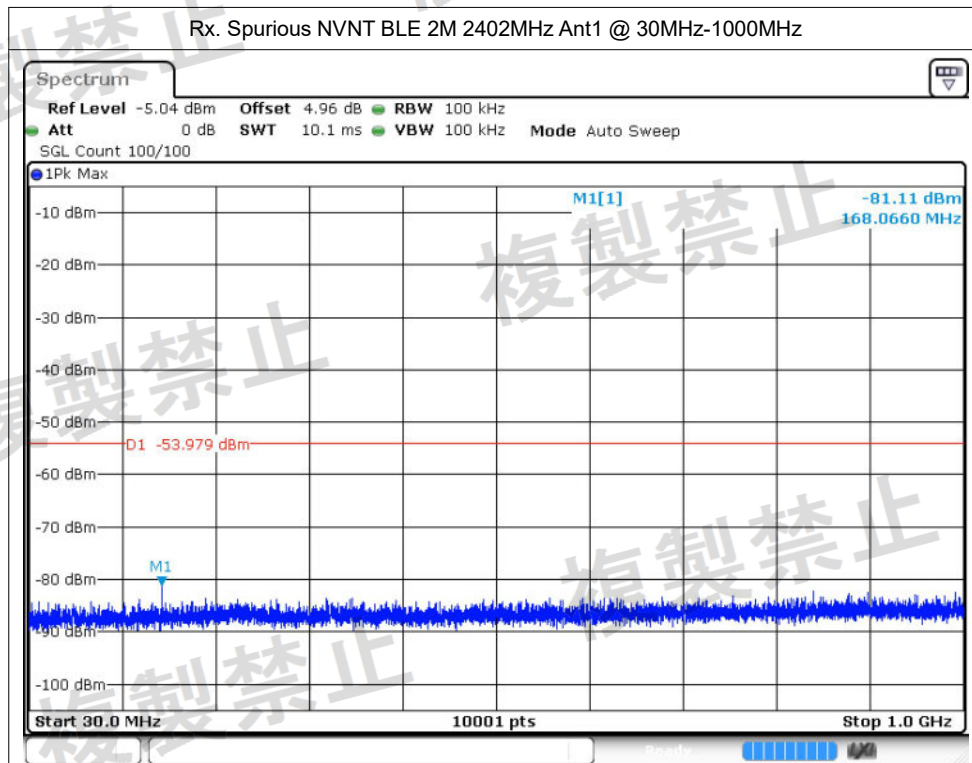


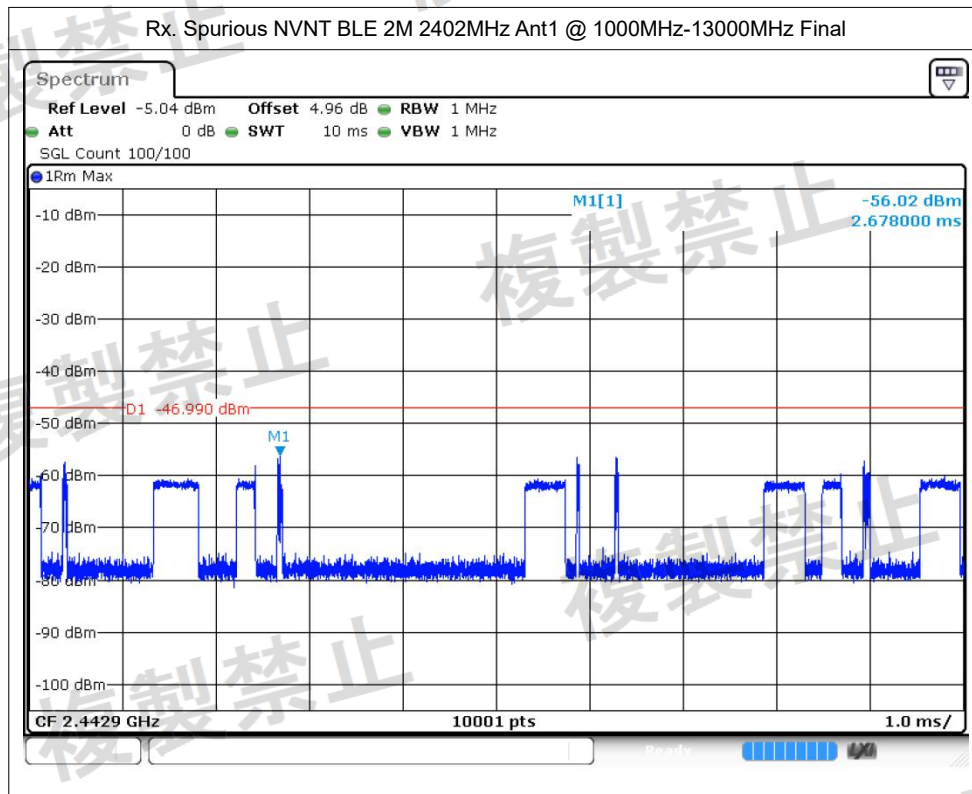


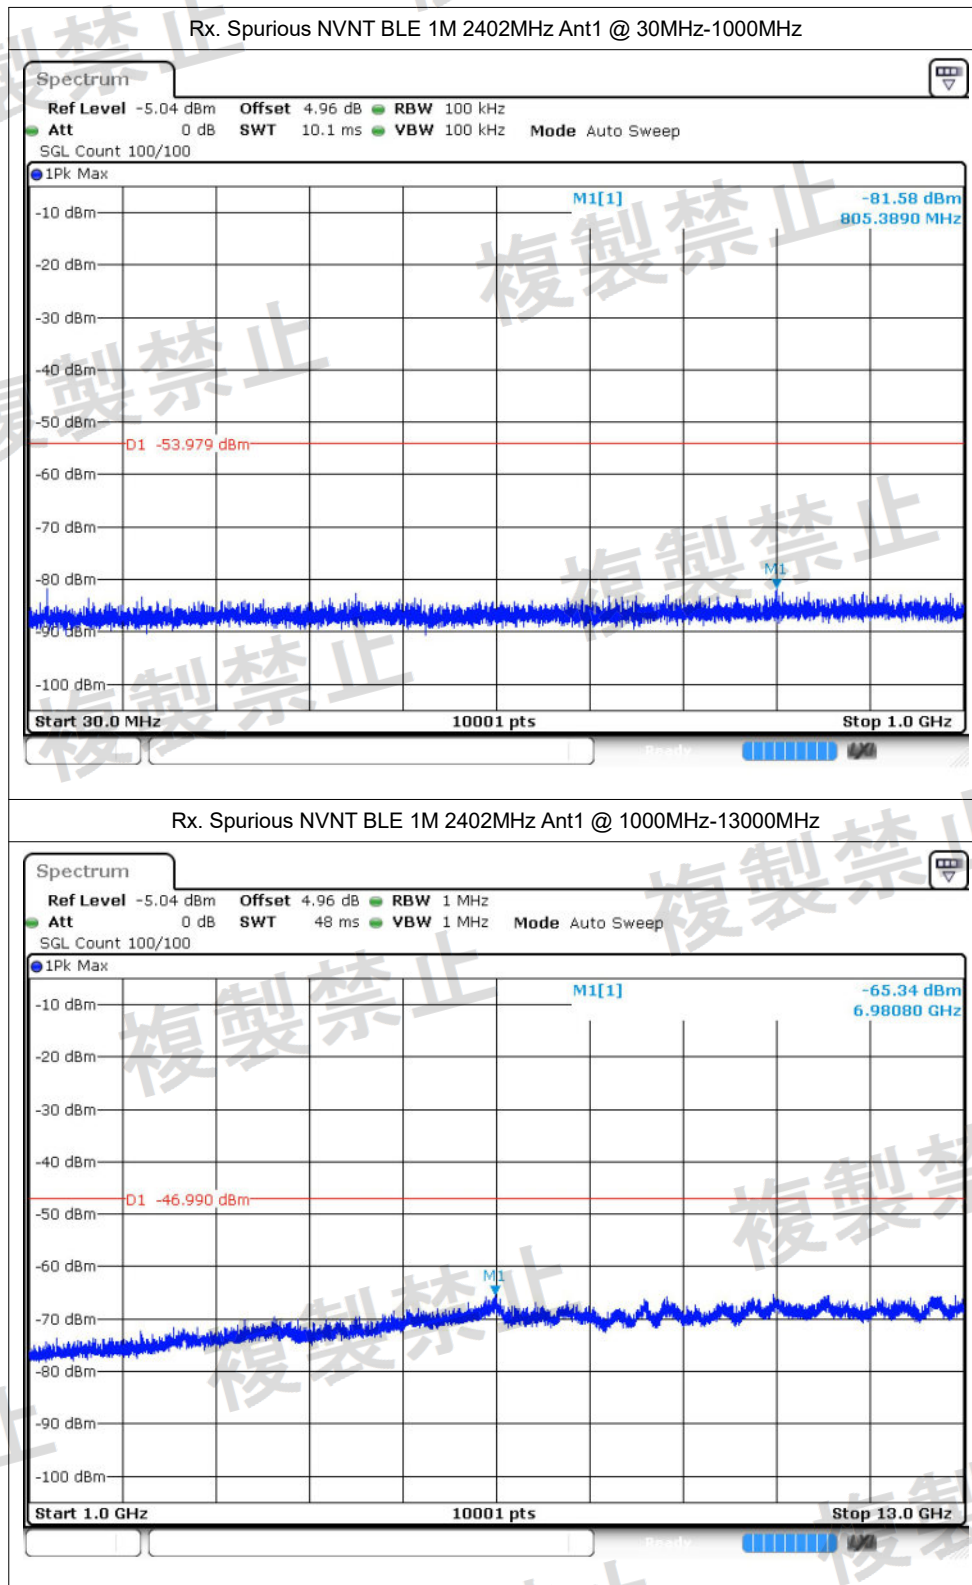

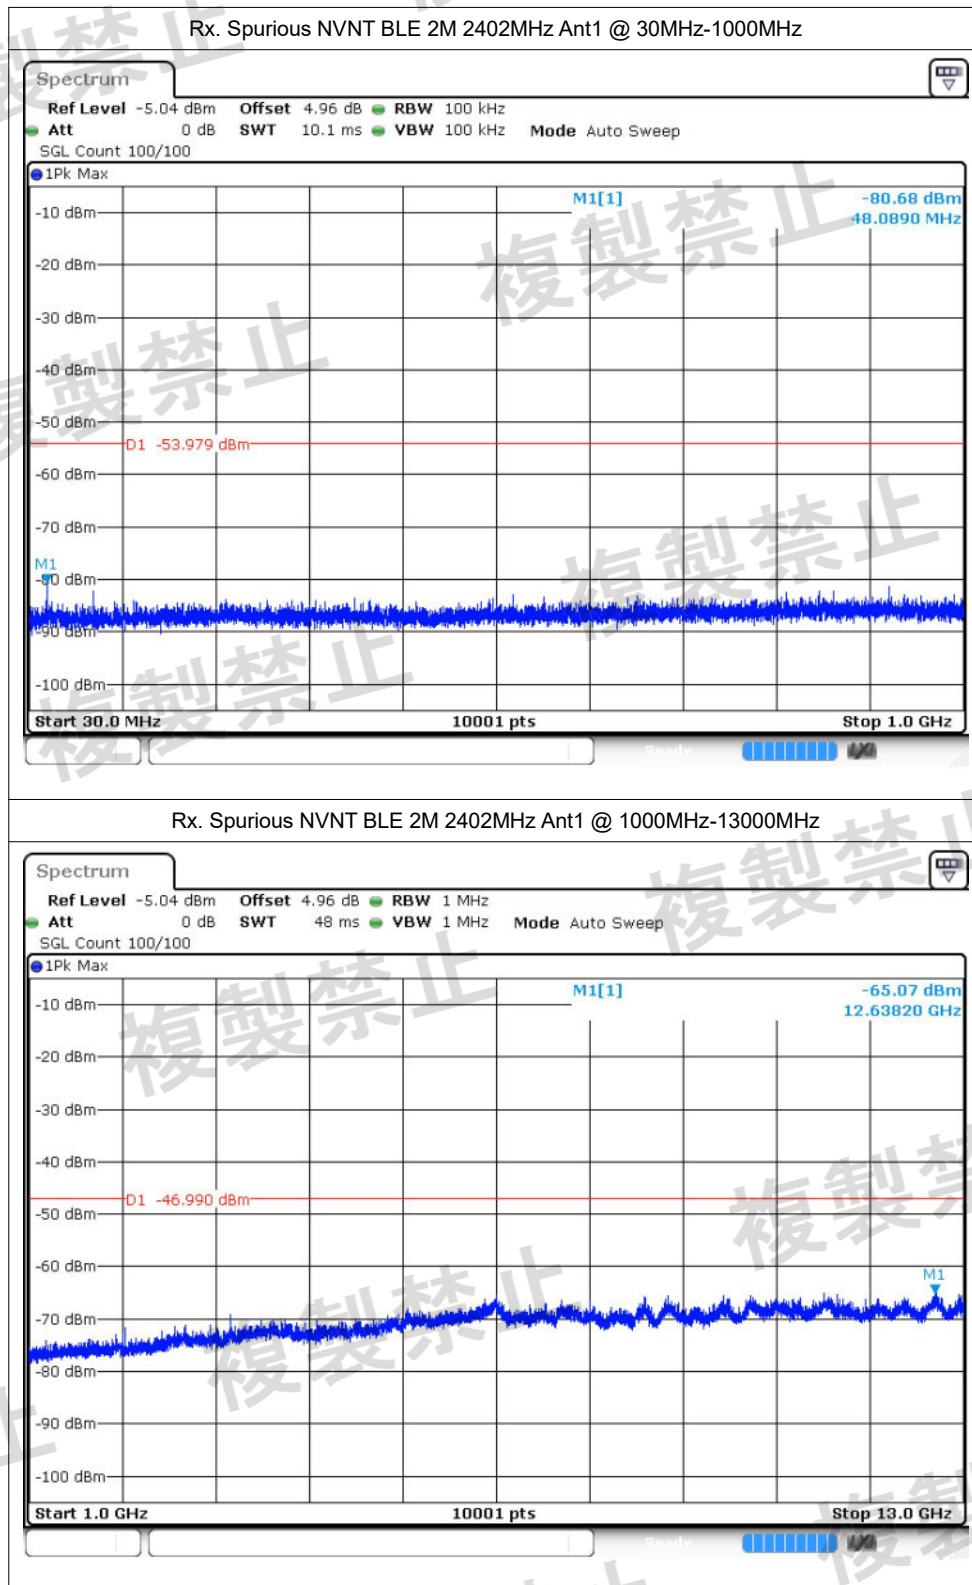

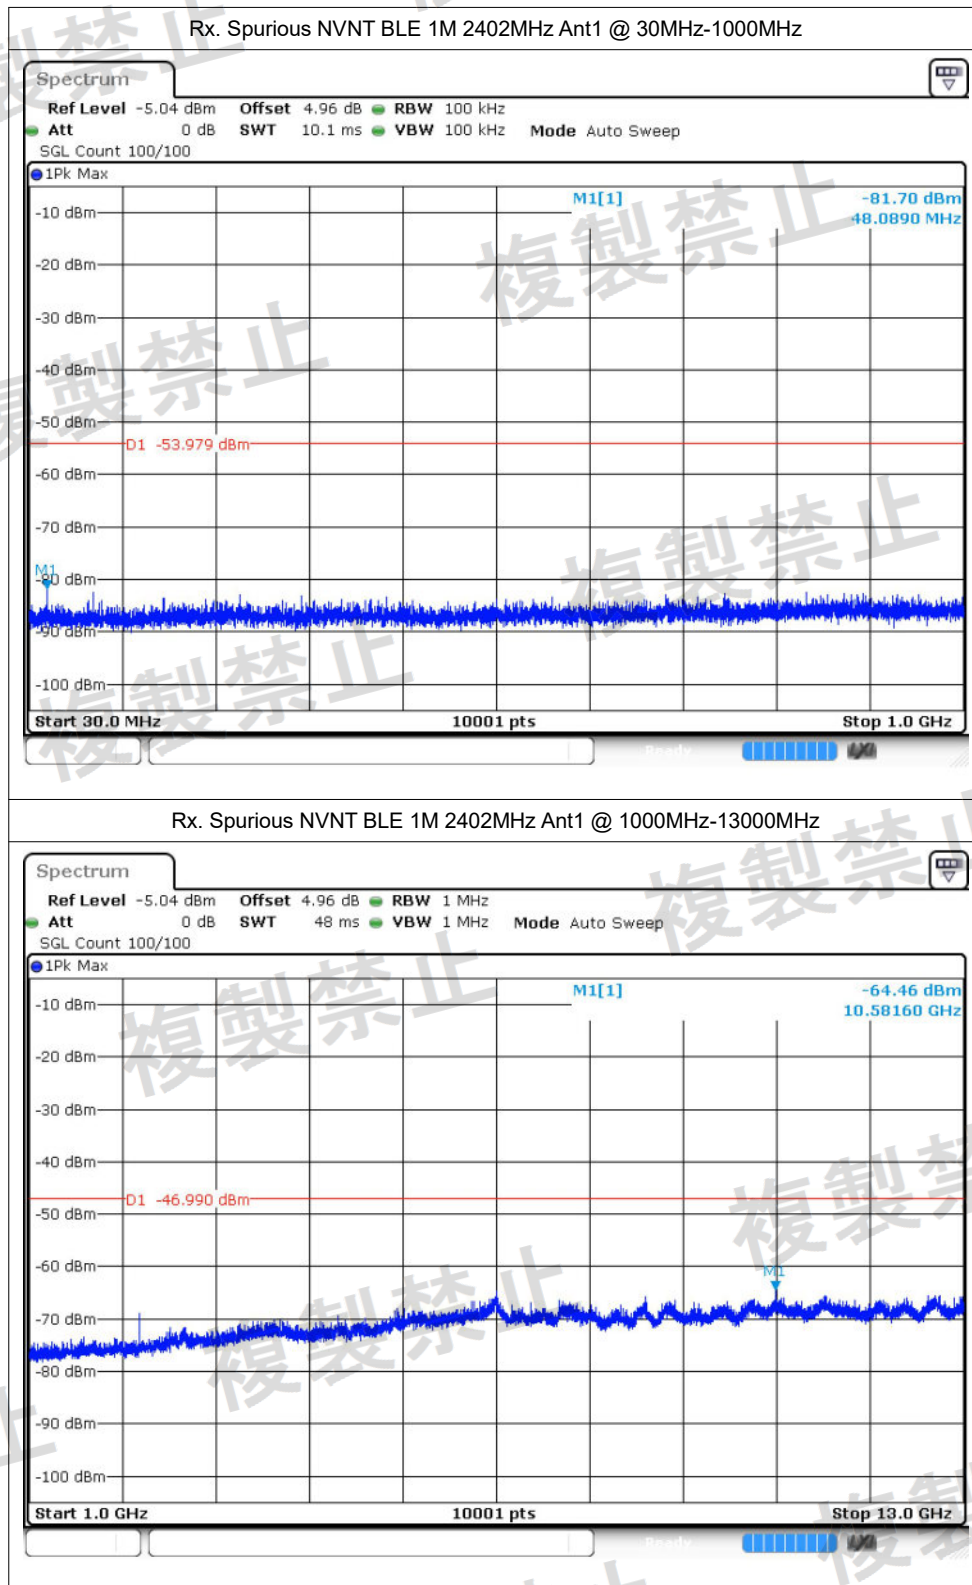

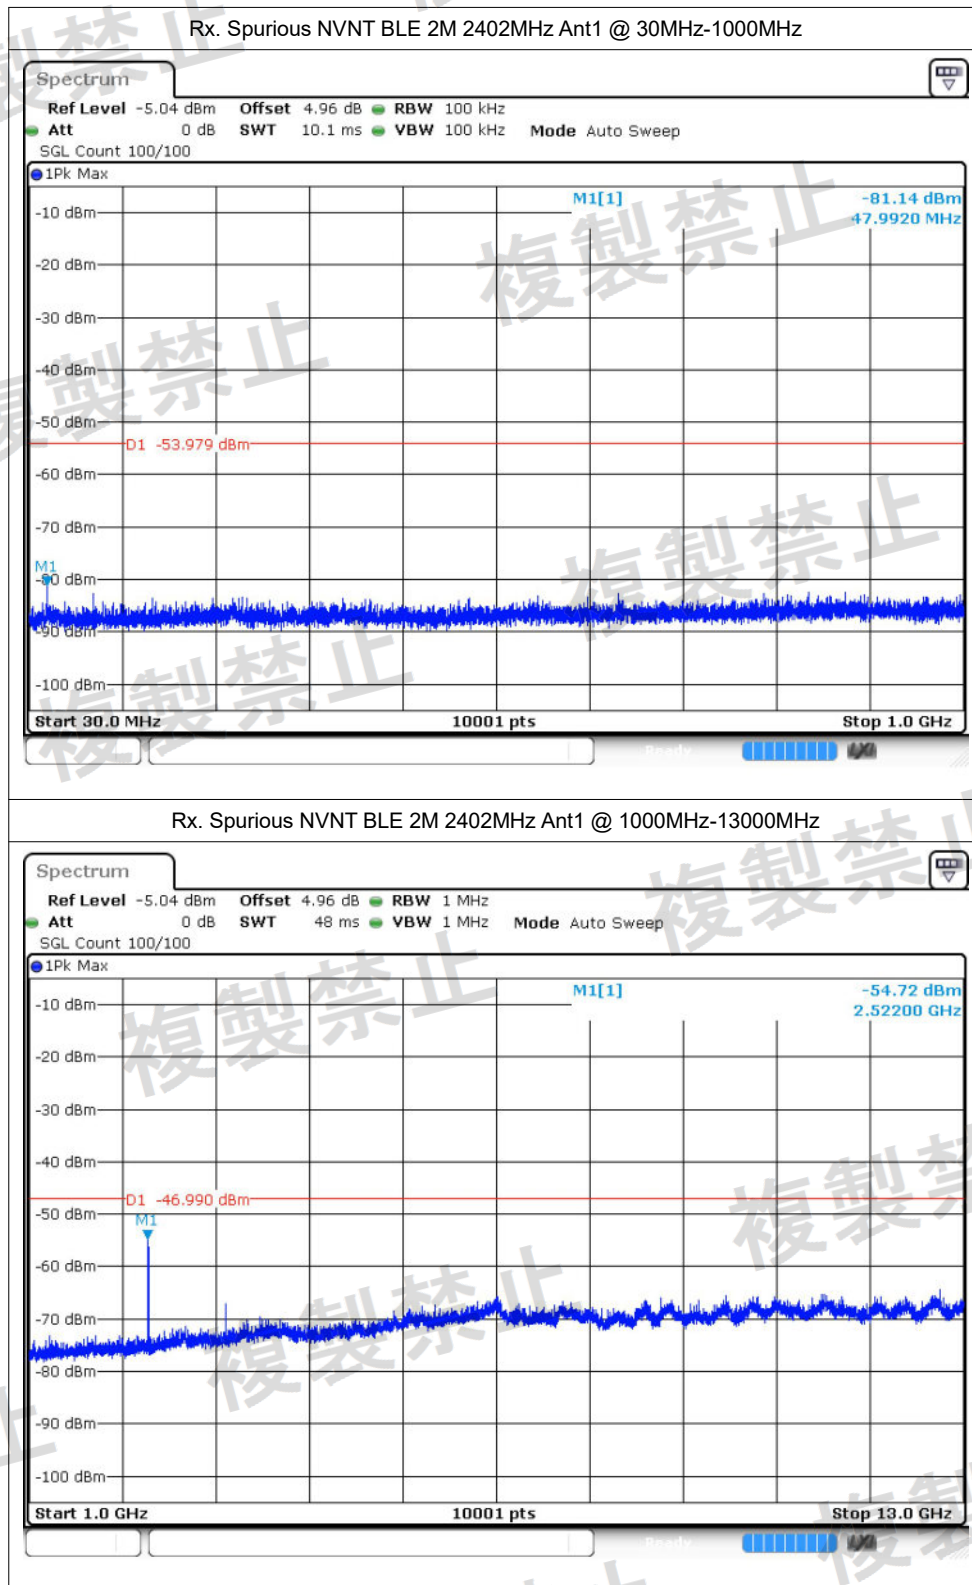

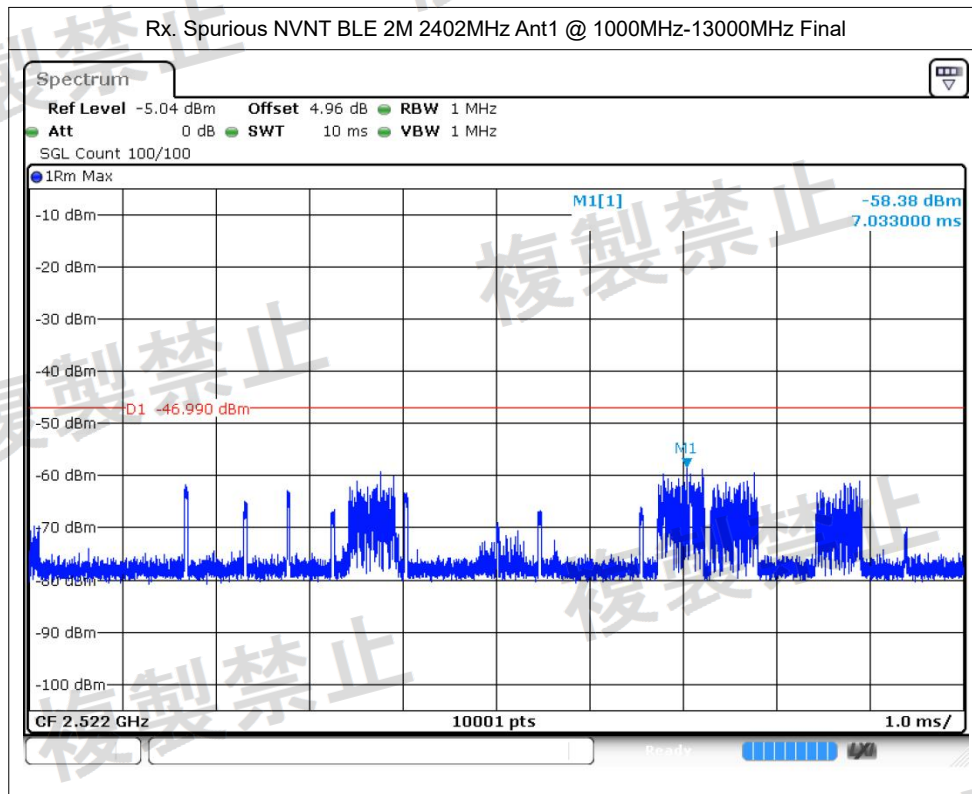

-----End-----