




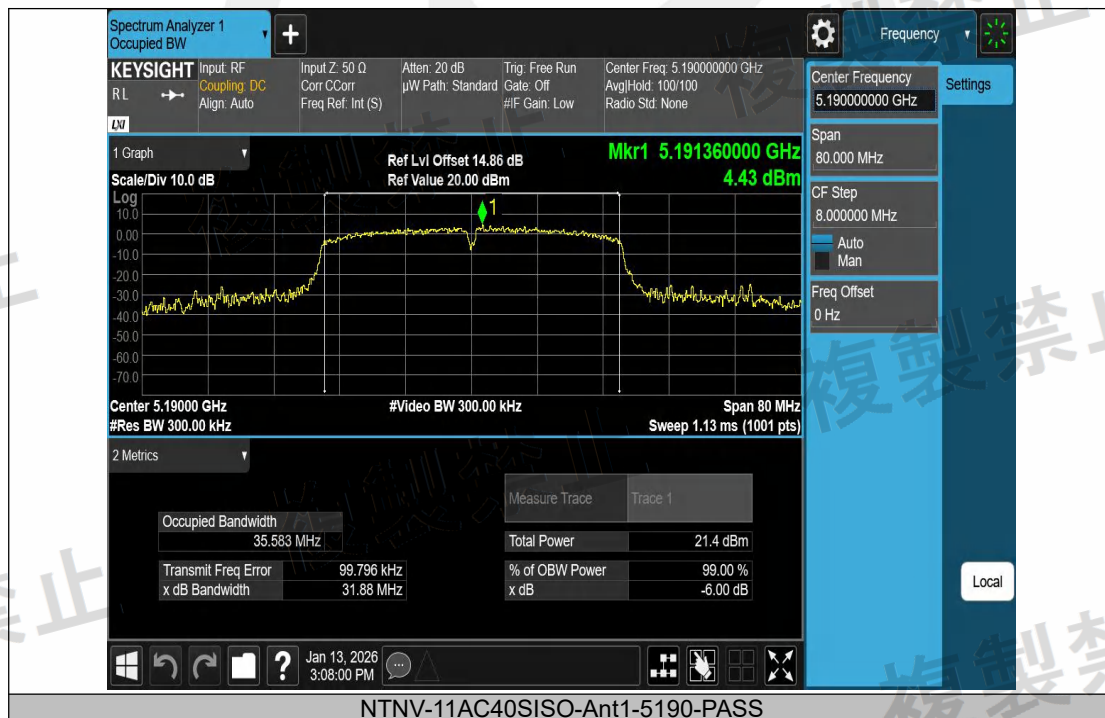


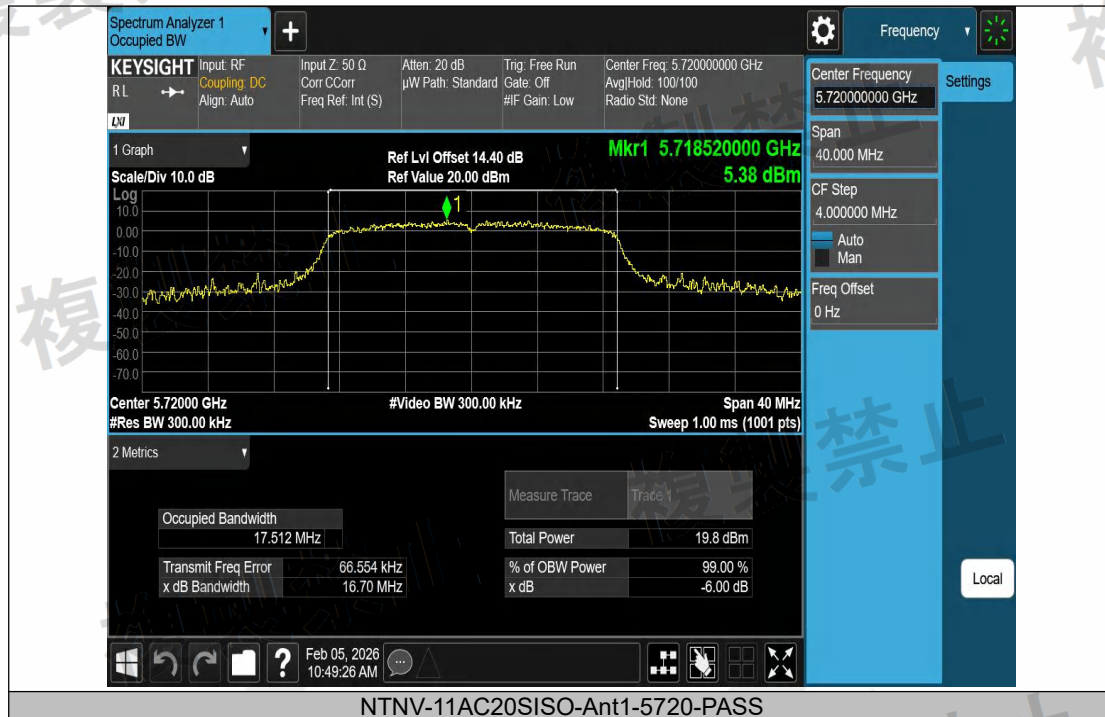


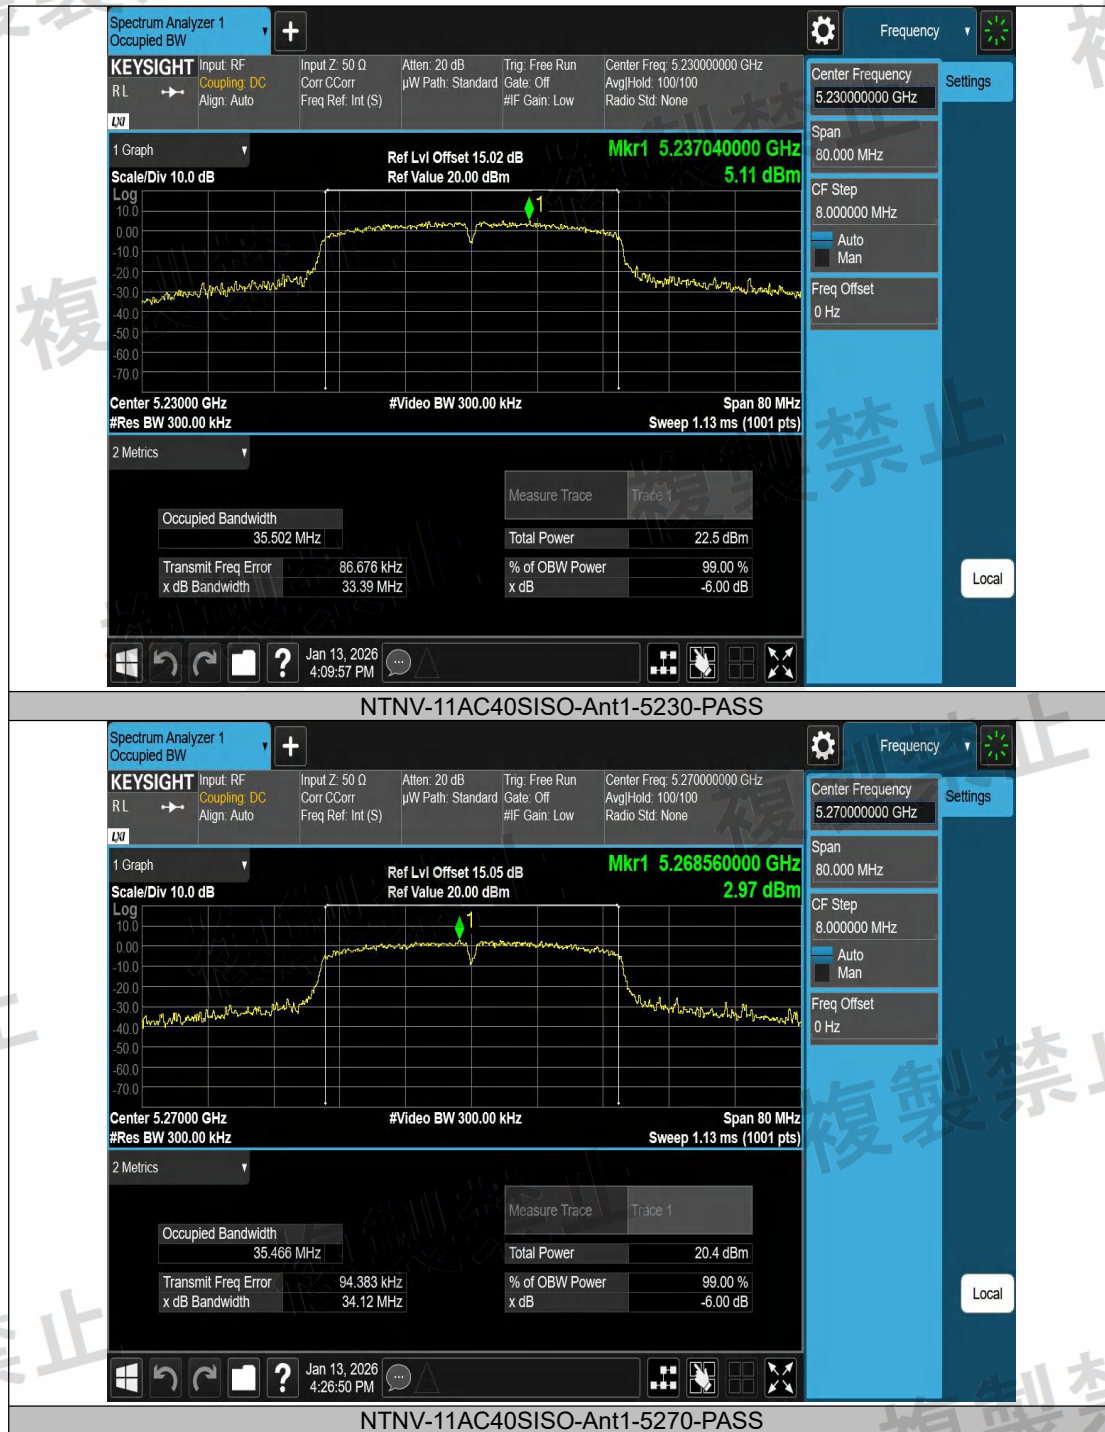


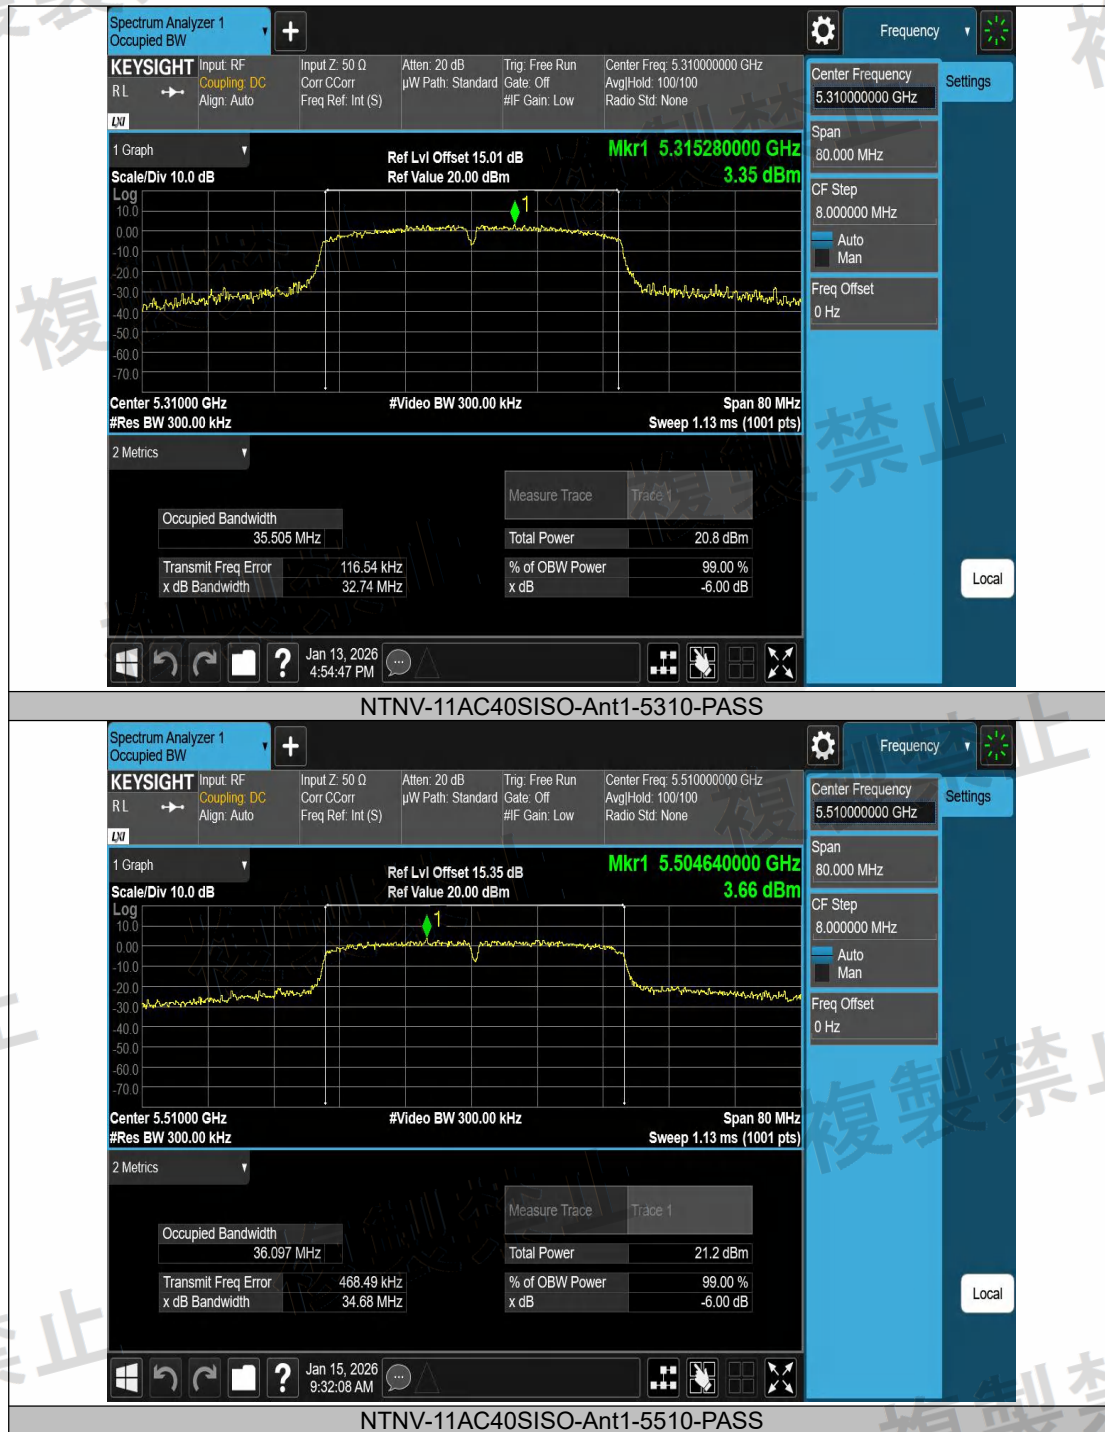

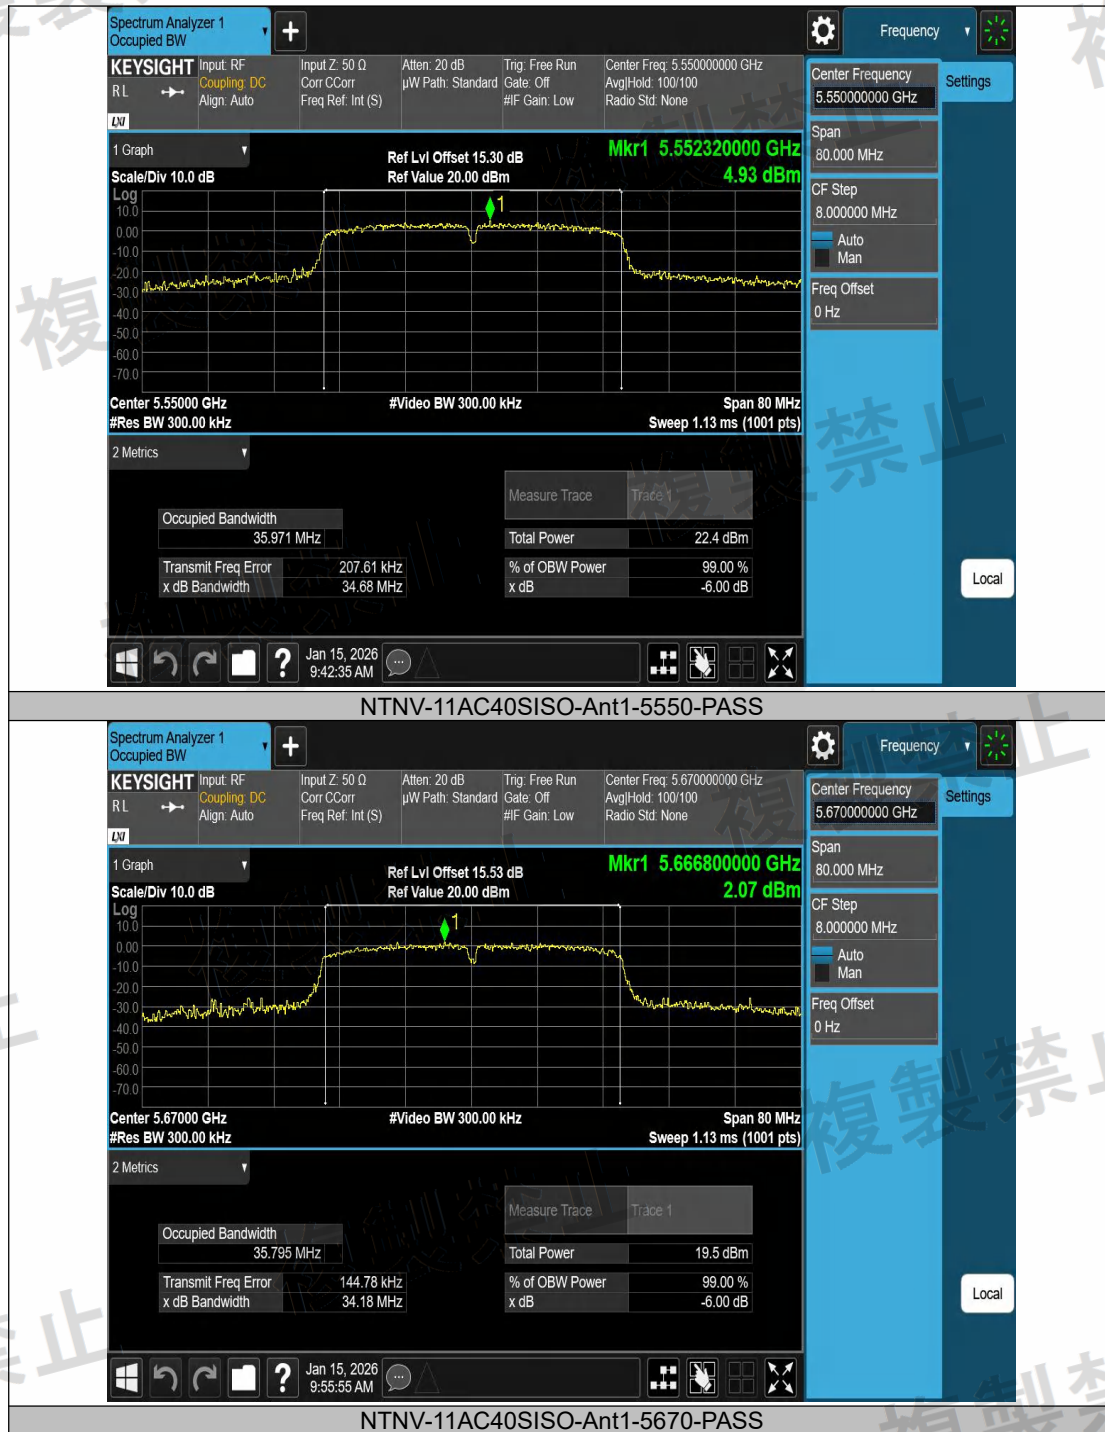


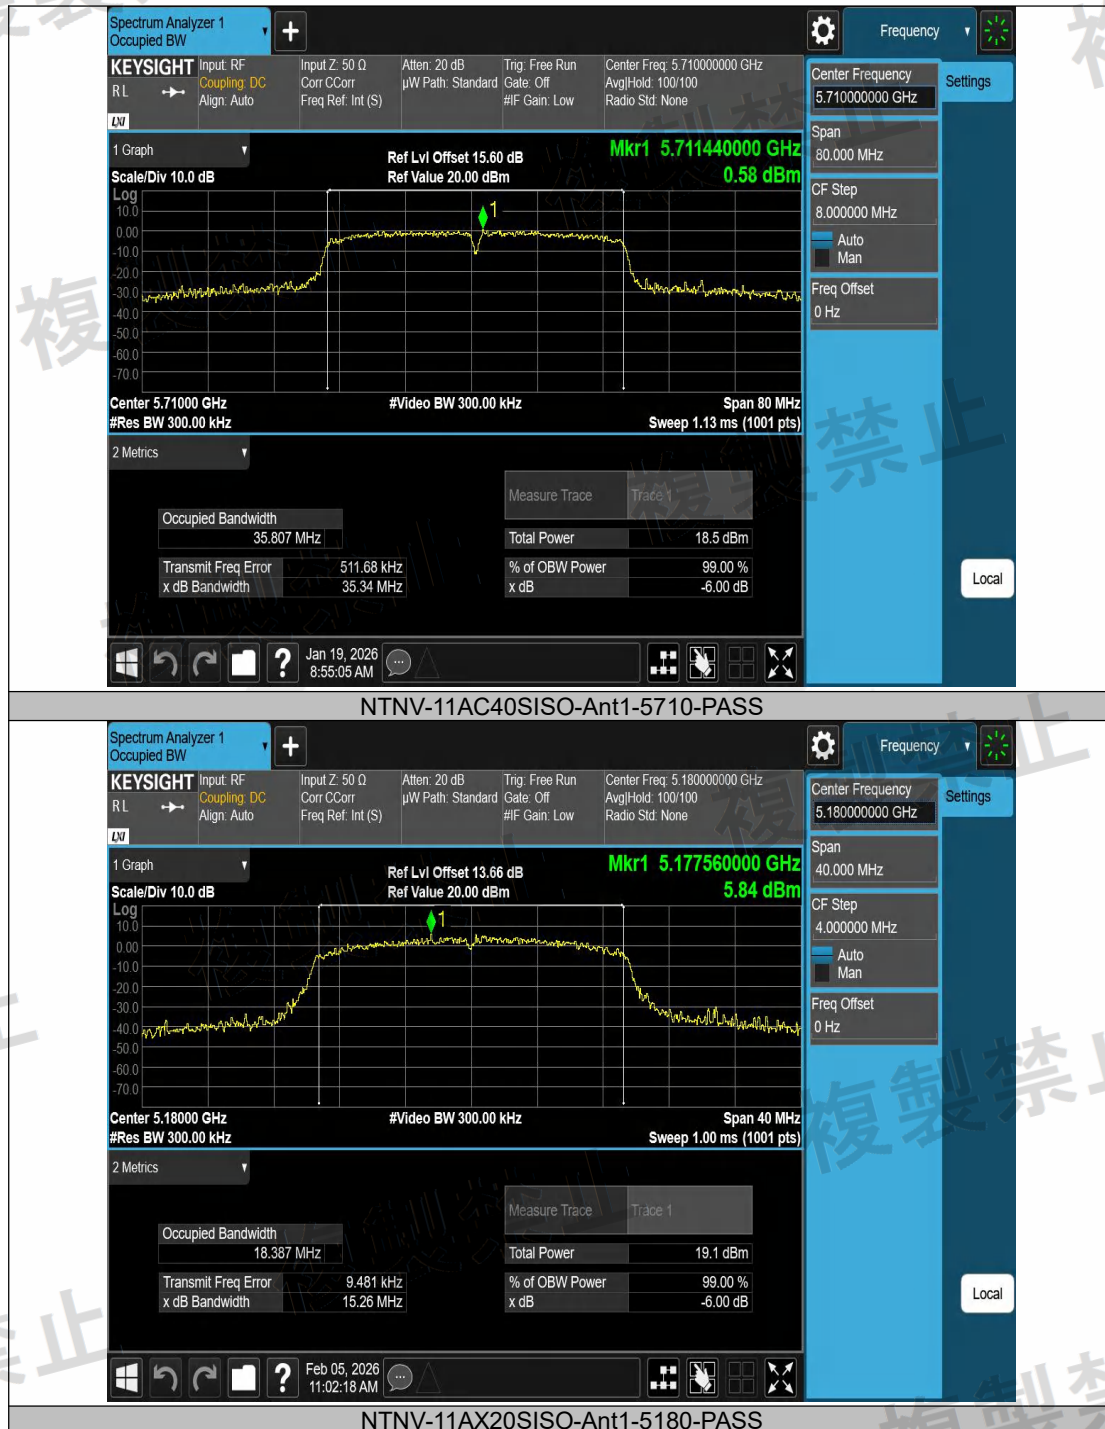

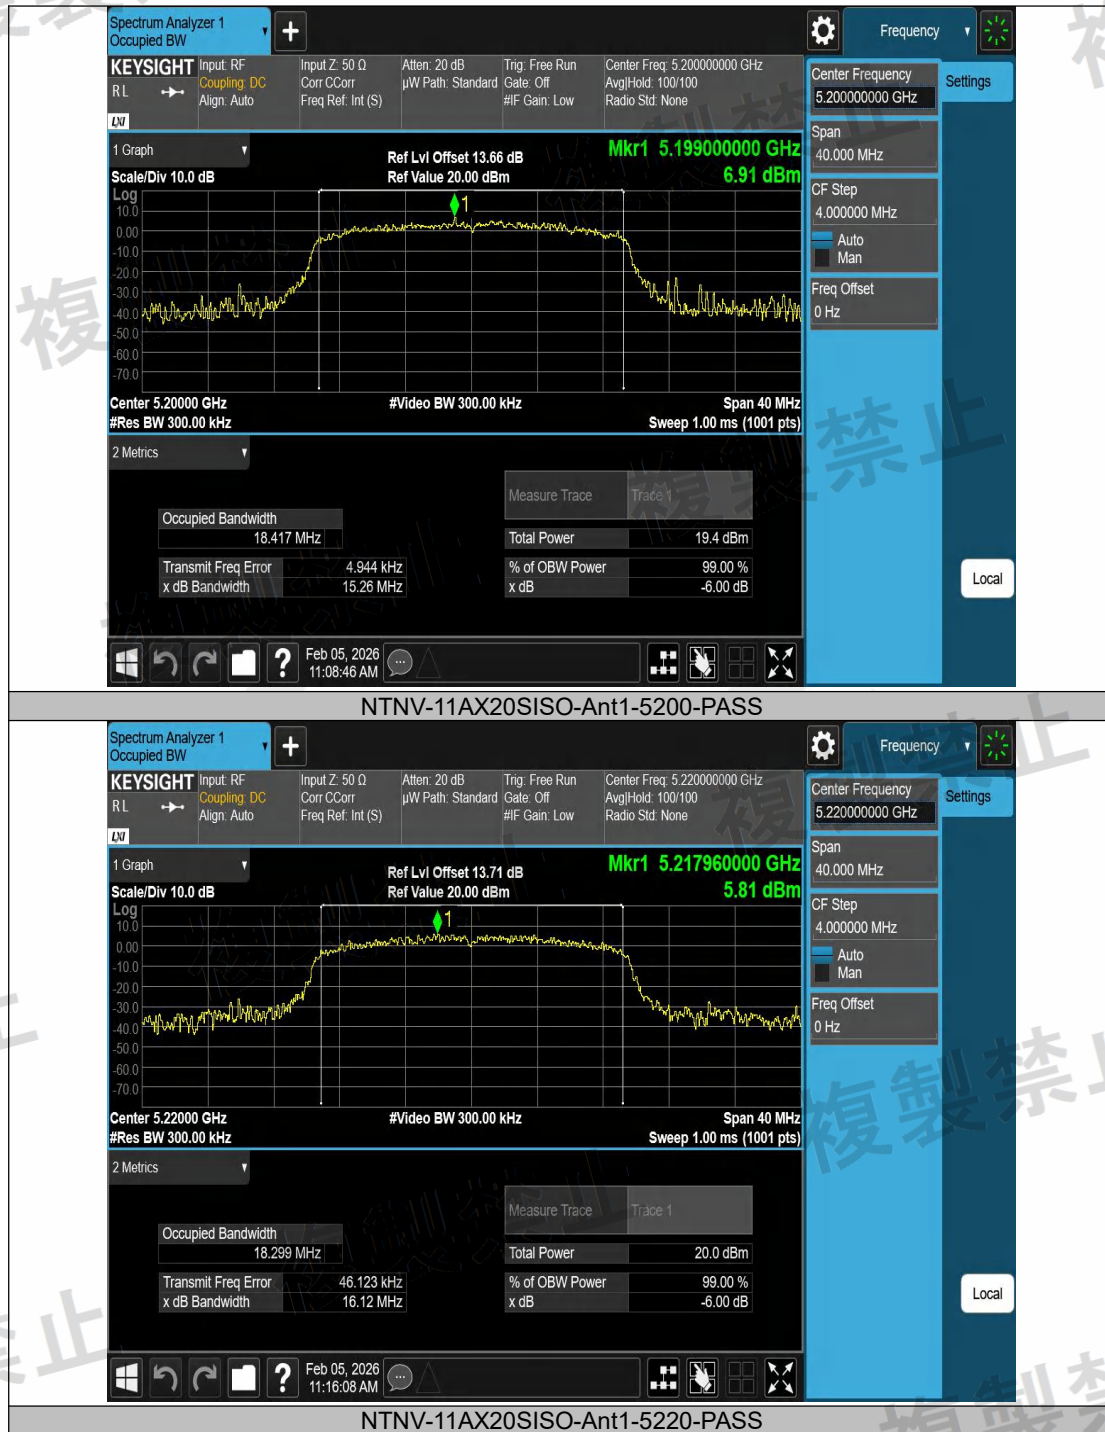


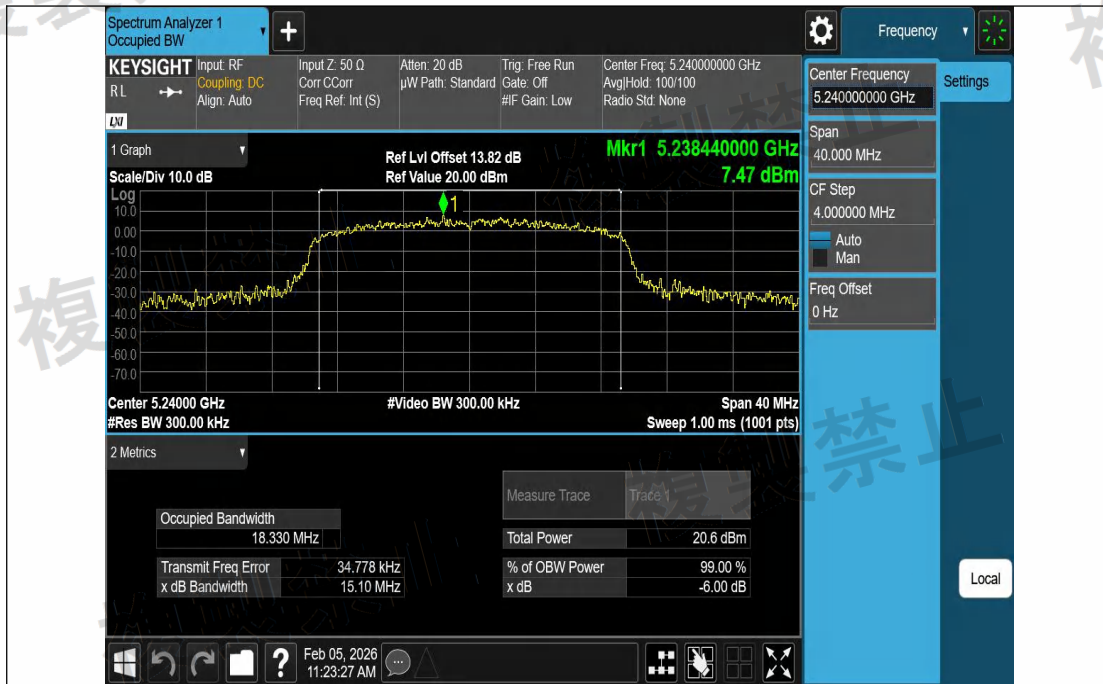



NTNV-11AX20SISO-Ant1-5240-PASS

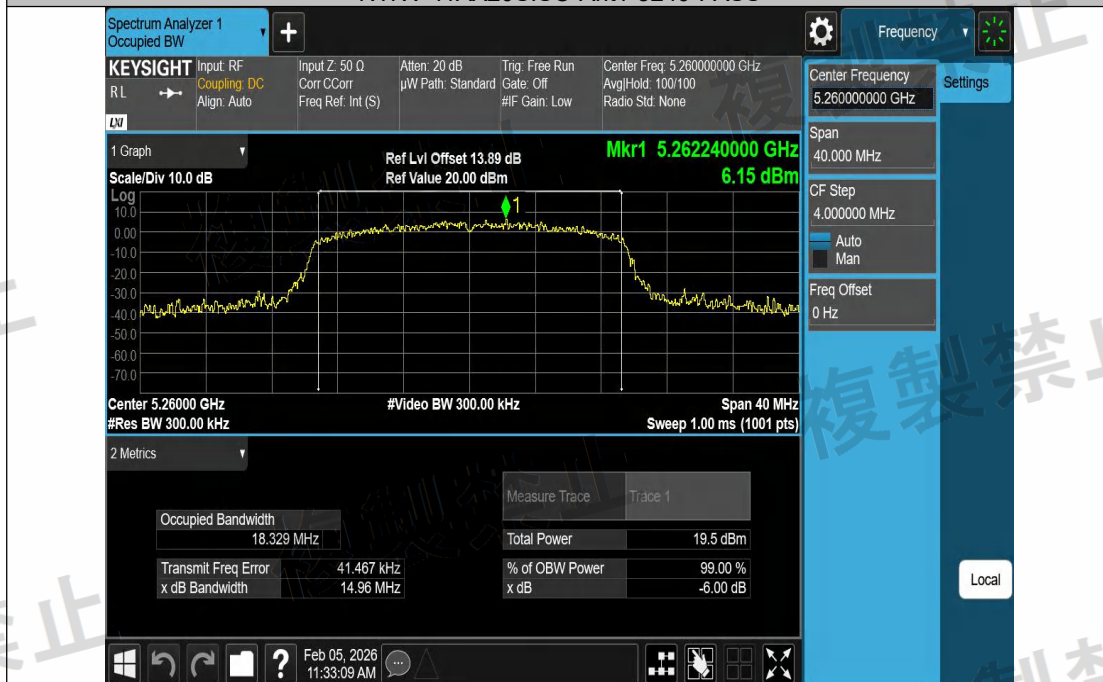



NTNV-11AX20SISO-Ant1-5260-PASS

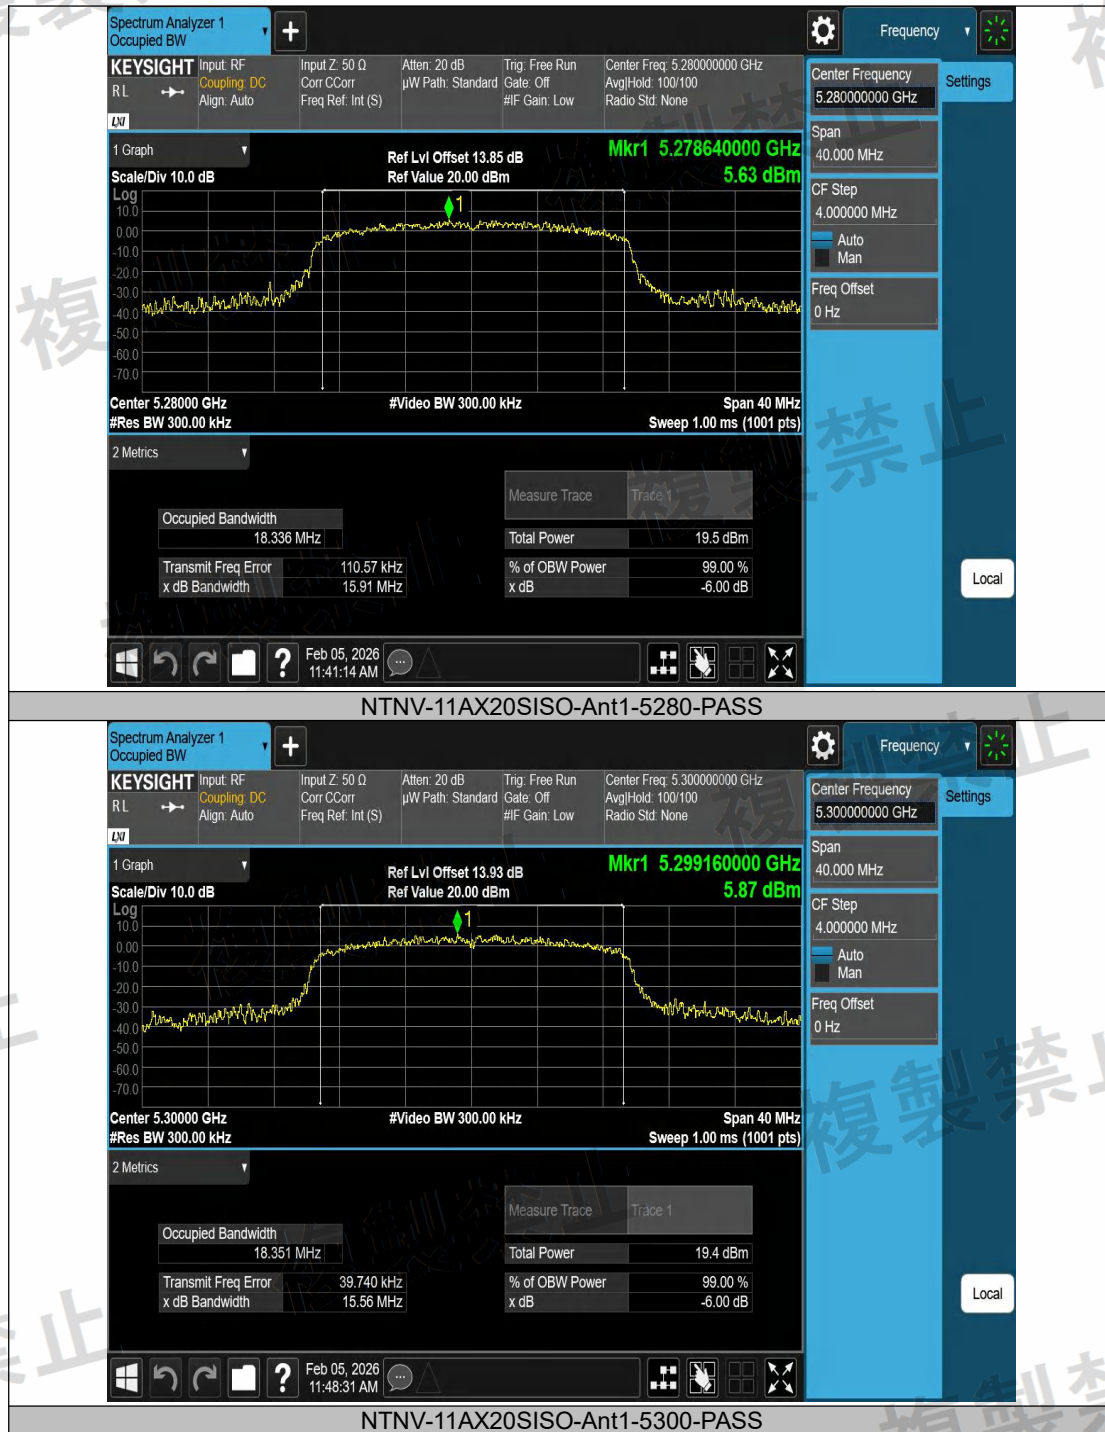


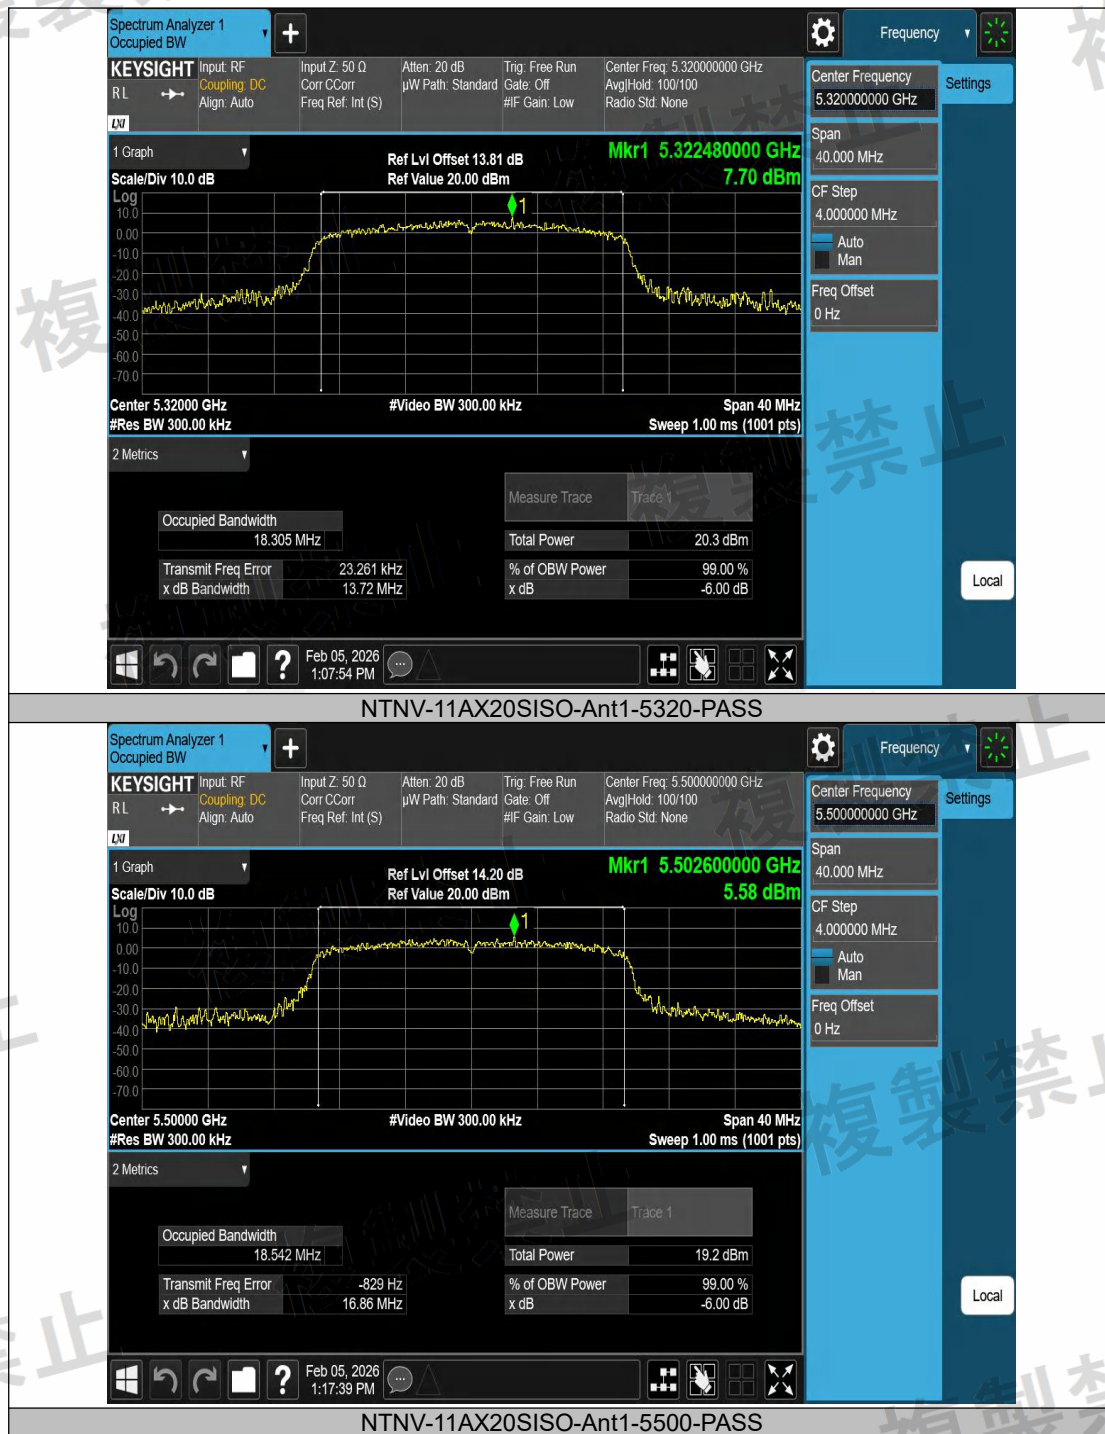

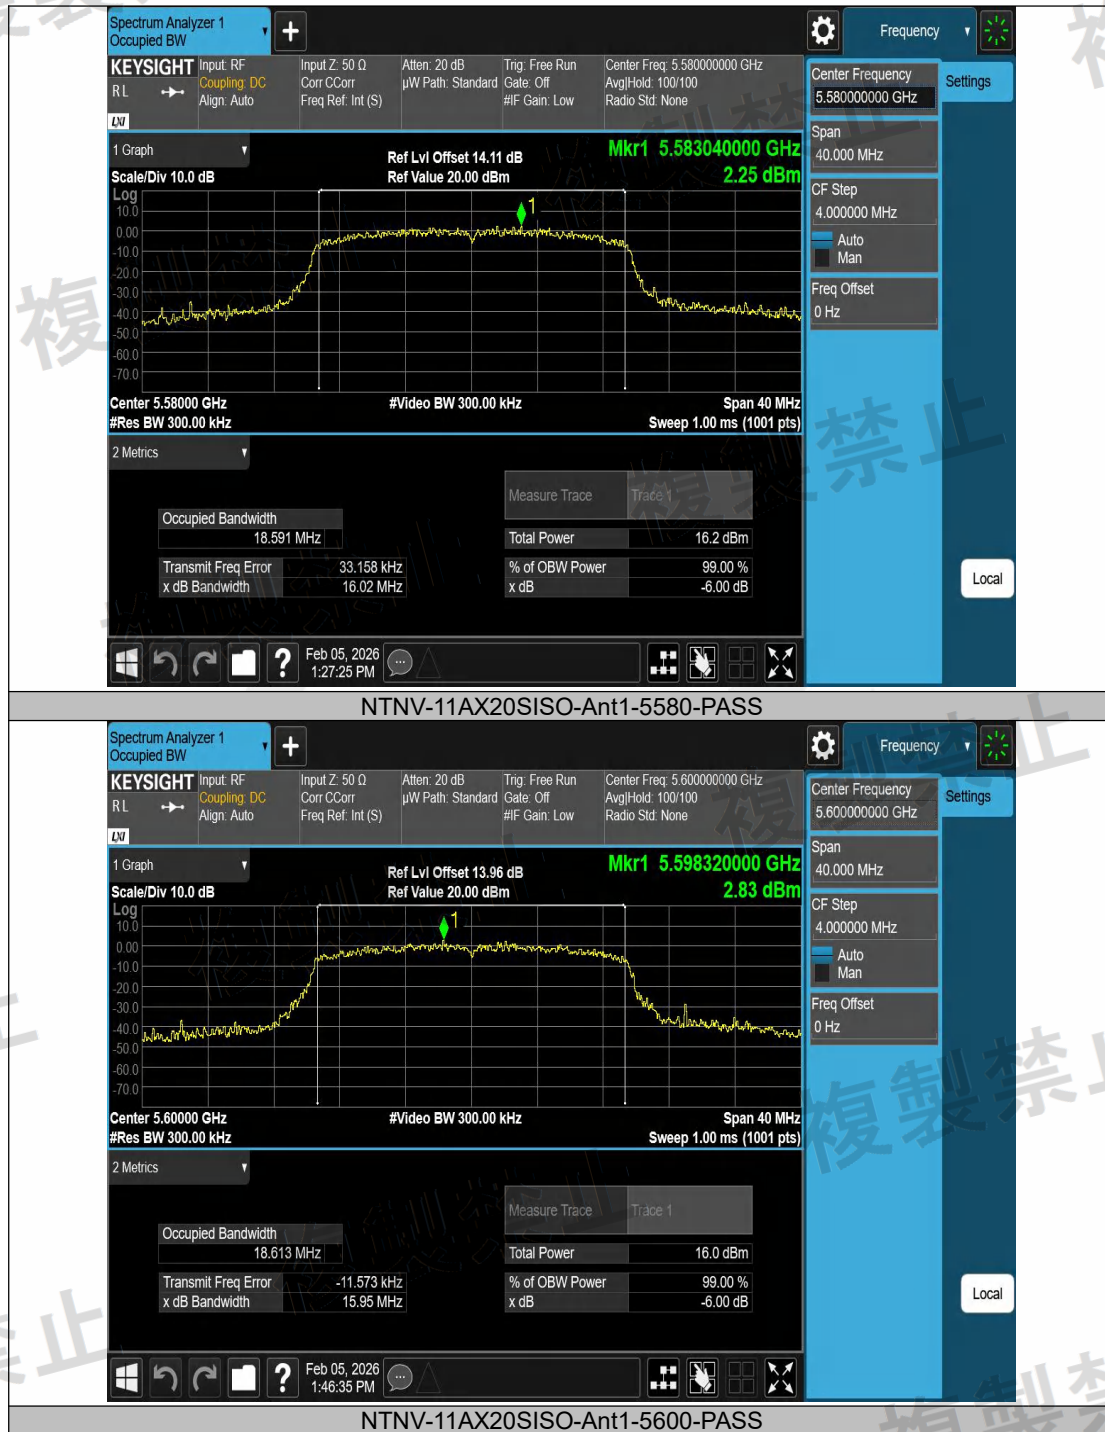


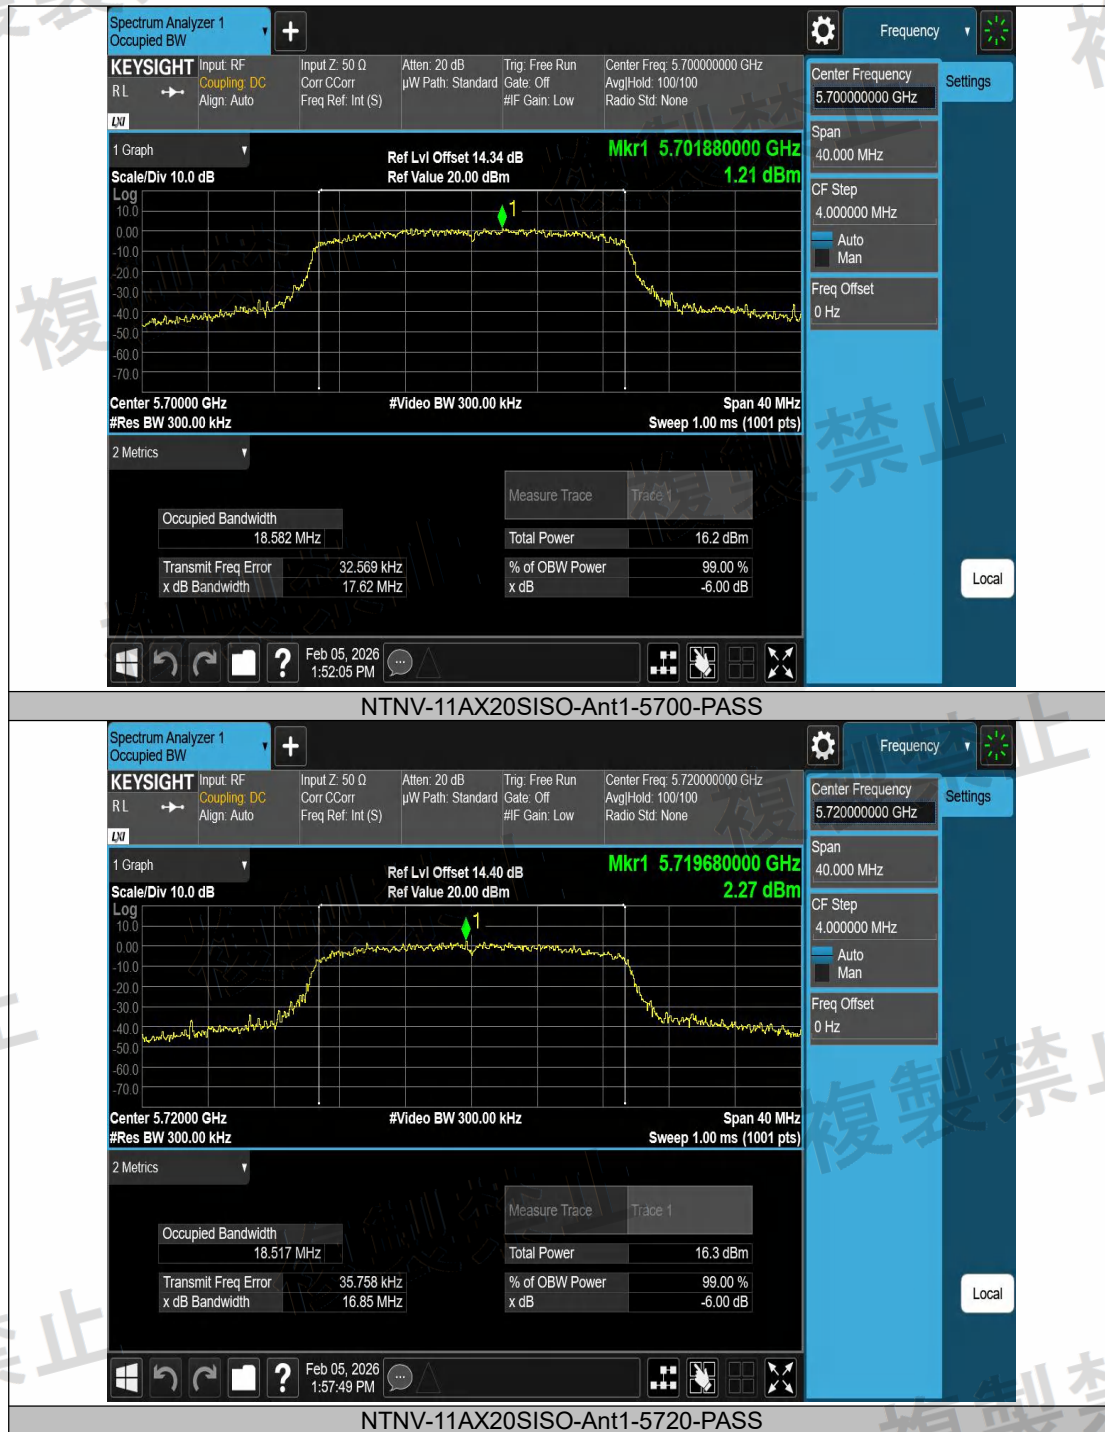

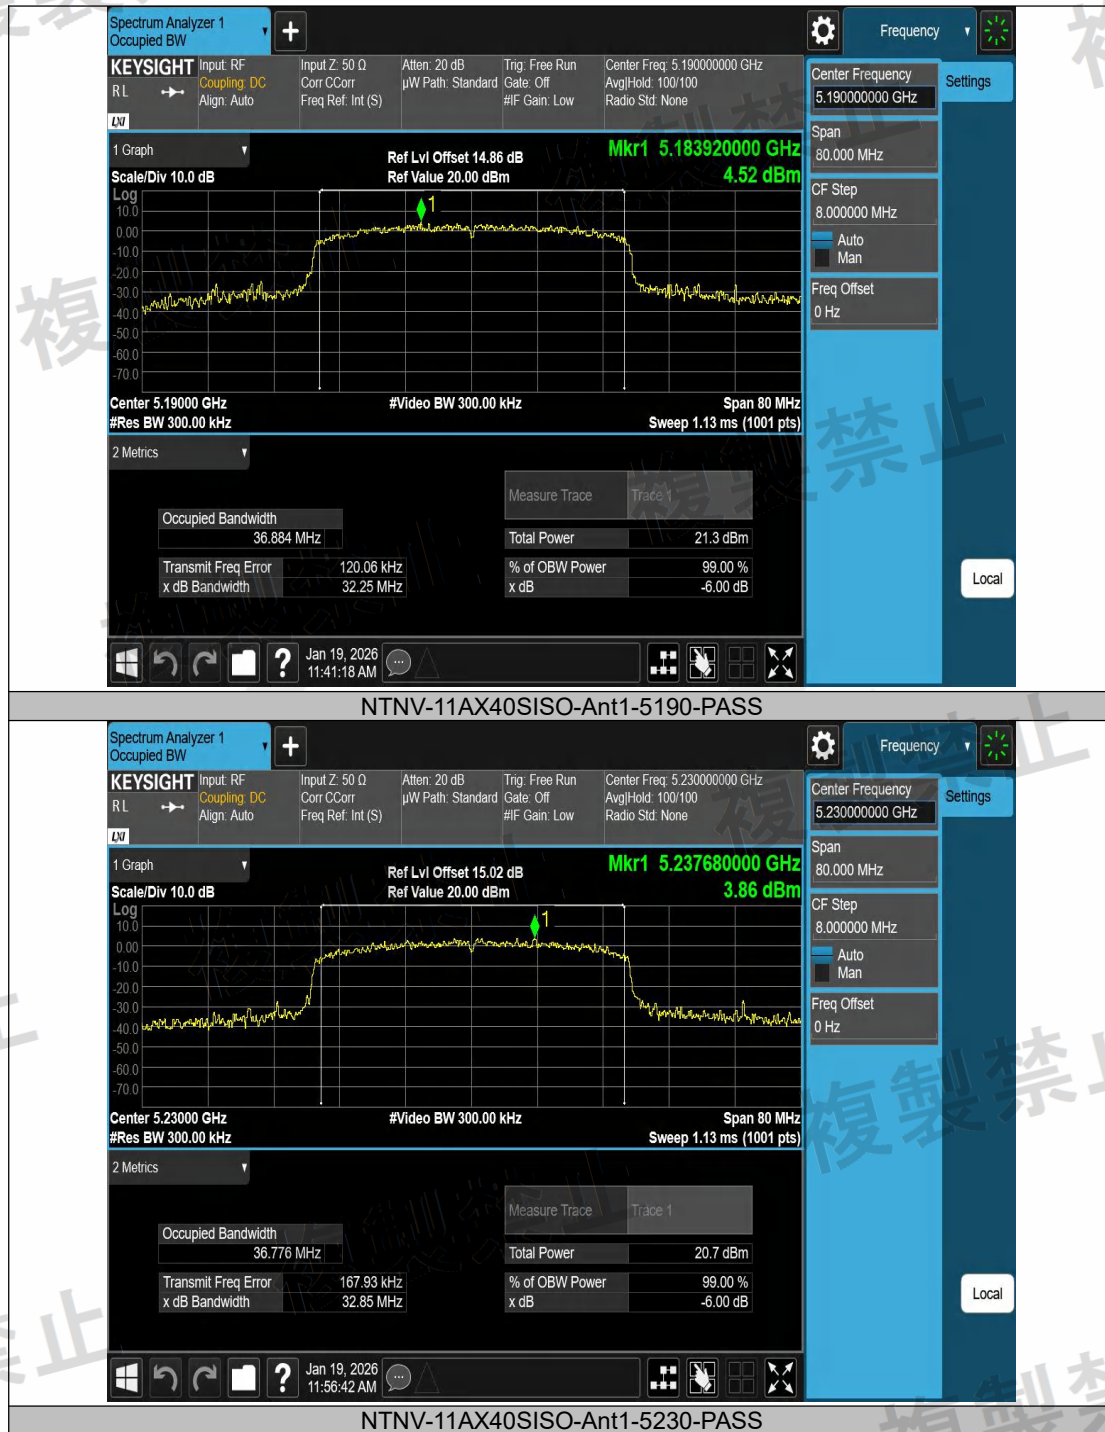


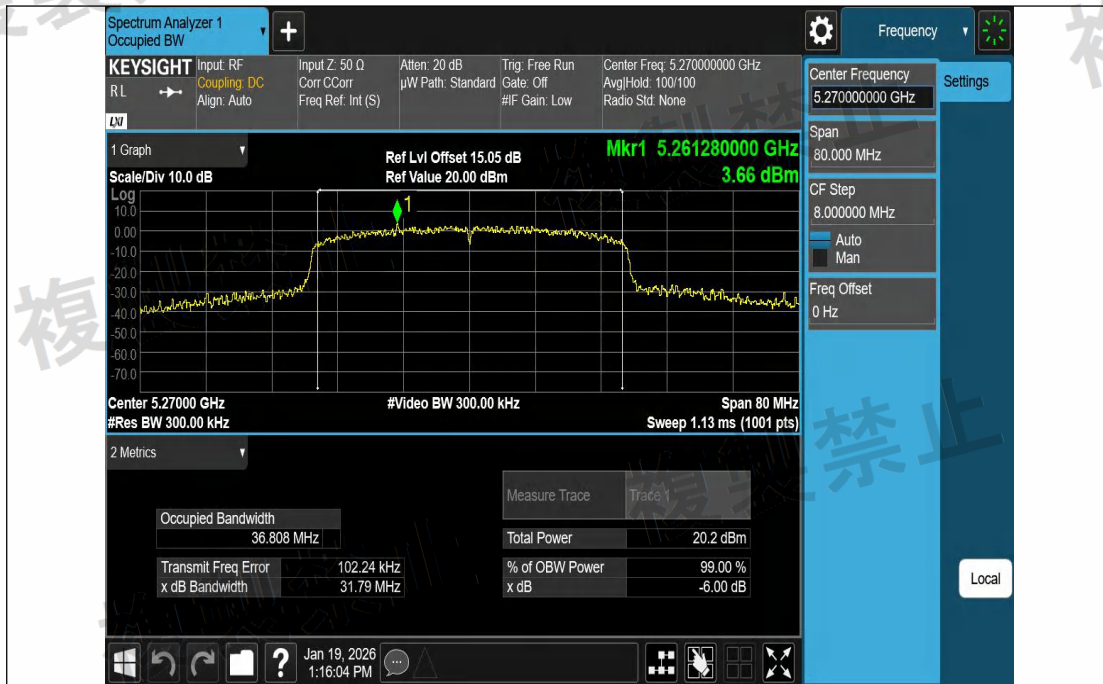


NTNV-11AX40SISO-Ant1-5270-PASS

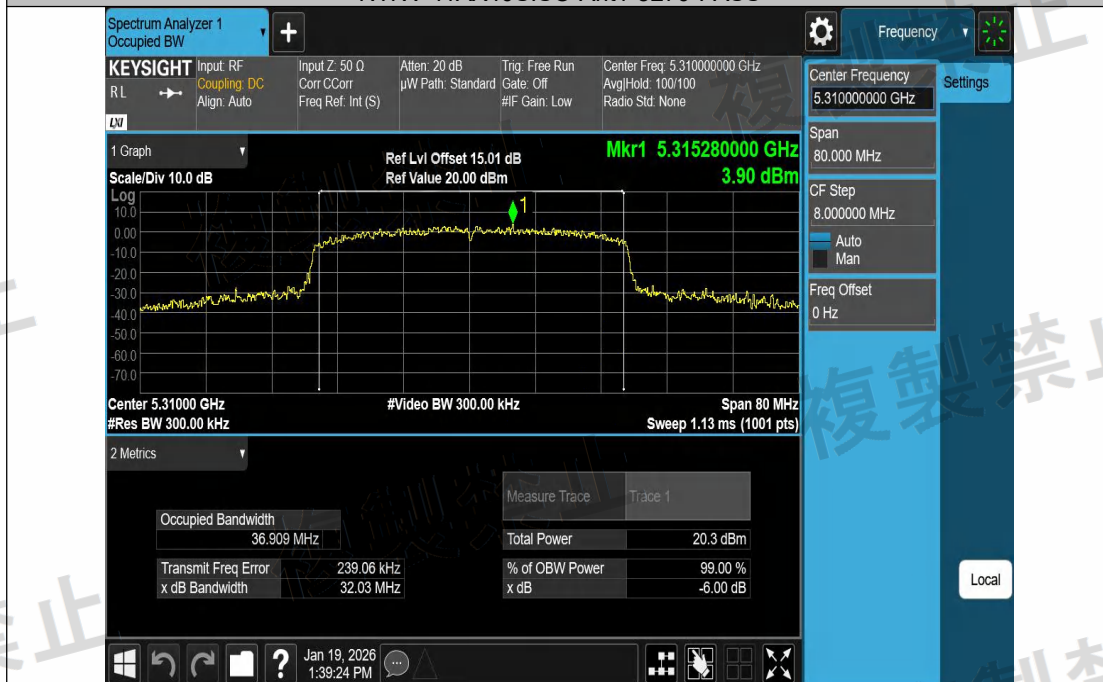

NTNV-11AX40SISO-Ant1-5310-PASS

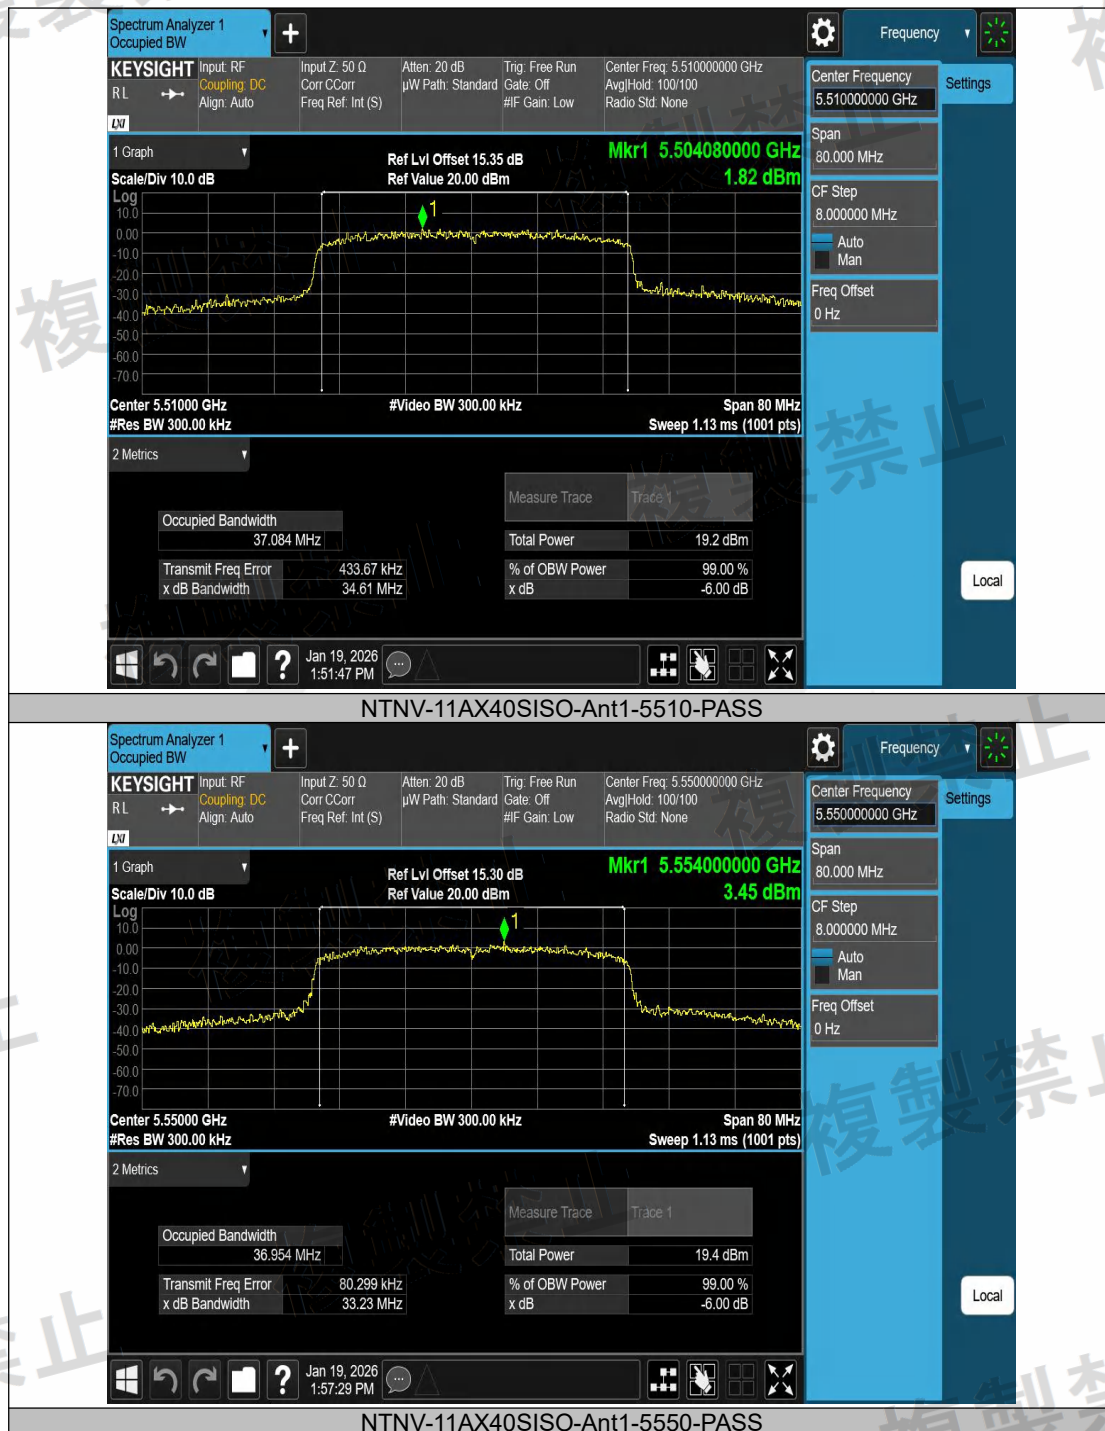

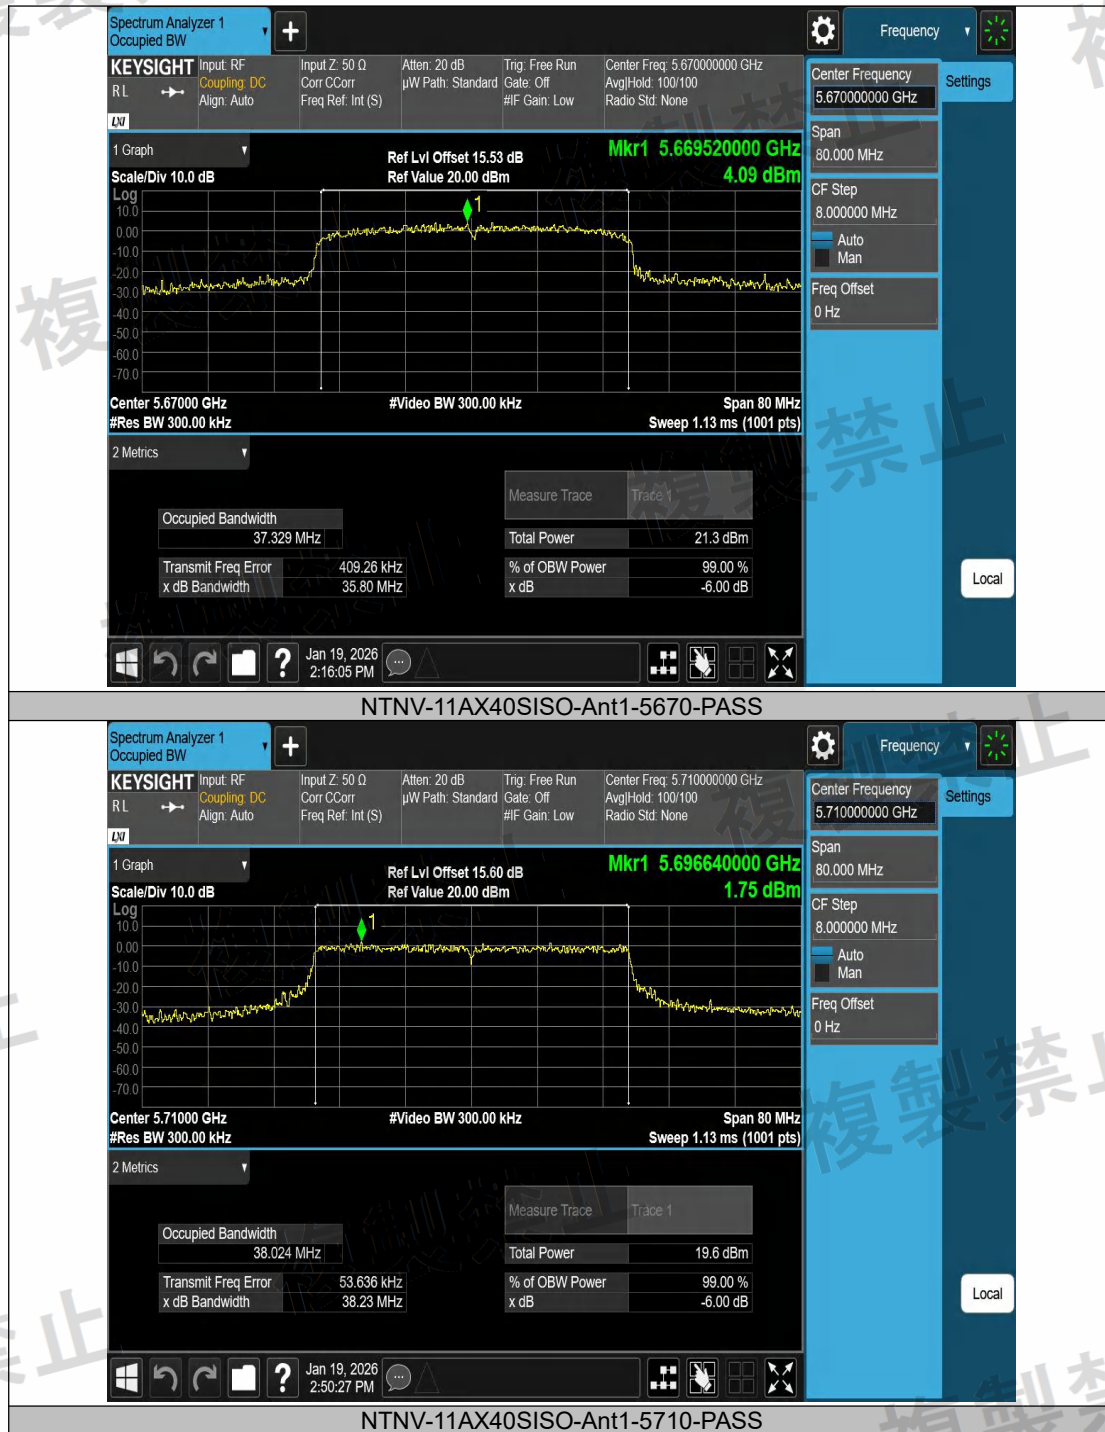

7.3 ANTENNA POWER AND TOLERANCES FOR ANTENNA POWER


7.3.1 Applicable Standard

Item 19-3 of Article 2 Paragraph 1

7.3.2 Conformance Limit

Item	Limit
Antenna Power	W52/W53/W56: Bandwidth 20MHz system: $\leq 10\text{mW/MHz}$ Bandwidth 40MHz system: $\leq 5\text{mW/MHz}$ Bandwidth 80MHz system: $\leq 2.5\text{mW/MHz}$ Bandwidth 160MHz system: $\leq 1.25\text{mW/MHz}$
Tolerance of Antenna Power	W52/W53: +20% ~ -80%; W56: +50% ~ -50%.
EIRP Antenna Power	W52 (BW 20MHz) ≤ 10 ; (BW 40MHz) ≤ 5 ; (BW 80MHz) ≤ 2.5 ; (BW 160MHz) ≤ 1.25 . W53 with TPC (BW 20MHz) ≤ 10 ; (BW 40MHz) ≤ 5 ; (BW 80MHz) ≤ 2.5 ; (BW 160MHz) ≤ 1.25 . W53 no TPC (BW 20MHz) ≤ 5 ; (BW 40MHz) ≤ 2.5 ; (BW 80MHz) ≤ 1.25 ; (BW 160MHz) ≤ 0.625 . W56 with TPC (BW 20MHz) ≤ 50 ; (BW 40MHz) ≤ 25 ; (BW 80MHz) ≤ 12.5 ; (BW 160MHz) ≤ 6.25 . W56 no TPC (BW 20MHz) ≤ 25 ; (BW 40MHz) ≤ 12.5 ; (BW 80MHz) ≤ 6.25 ; (BW 160MHz) ≤ 3.125 .

7.3.3 Test Setup Block Diagram

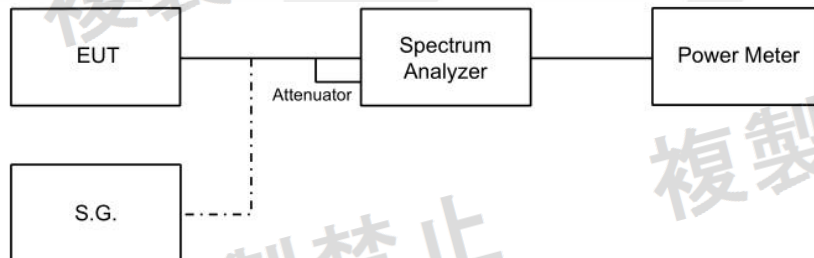

7.3.4 Test Procedure

Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:

Setup 1:

Centre Frequency: The centre frequency of the channel under test.

Resolution BW: 1MHz

Video BW: 1 MHz

Span: Wide enough to cover the complete power envelope of the signal of the EUT.

Detector: Peak.

Trace Mode: Max Hold.

Find the frequency of maximum RF level.

Setup 2:

Centre Frequency: frequency of maximum RF level.

Resolution BW: 1MHz

Video BW: 1 MHz

Span: 0Hz.

Detector: RMS.

Trace: Average.

Trace Mode: Max Hold.

Note: The cable loss and attenuator loss have been put into spectrum analyzer as amplitude offset.

7.3.5 Environmental Conditions

Temperature:	25°C
Relative Humidity:	60%
ATM Pressure:	1011 mbar

7.3.6 Test Results

Antenna Power							
TestCondition	TestMode	Antenna	Frequency[MHz]	Result(dBm)	Result(mW)	Limit(mW)	Verdict
NTNV	11A	Ant1	5180	2.90	1.9498	≤10	PASS
NTNV	11A	Ant1	5200	3.52	2.2491	≤10	PASS
NTNV	11A	Ant1	5220	4.46	2.7925	≤10	PASS
NTNV	11A	Ant1	5240	5.02	3.1769	≤10	PASS
NTNV	11A	Ant1	5260	2.57	1.8072	≤10	PASS
NTNV	11A	Ant1	5280	2.98	1.9861	≤10	PASS
NTNV	11A	Ant1	5300	2.88	1.9409	≤10	PASS
NTNV	11A	Ant1	5320	3.30	2.1380	≤10	PASS
NTNV	11A	Ant1	5500	4.90	3.0903	≤10	PASS
NTNV	11A	Ant1	5580	5.86	3.8548	≤10	PASS
NTNV	11A	Ant1	5600	4.06	2.5468	≤10	PASS
NTNV	11A	Ant1	5700	4.41	2.7606	≤10	PASS
NTNV	11A	Ant1	5720	4.01	2.5177	≤10	PASS
NTNV	11N20SI SO	Ant1	5180	6.48	4.4463	≤10	PASS
NTNV	11N20SI SO	Ant1	5200	6.57	4.5394	≤10	PASS
NTNV	11N20SI SO	Ant1	5220	1.24	1.3305	≤10	PASS
NTNV	11N20SI SO	Ant1	5240	3.55	2.2646	≤10	PASS
NTNV	11N20SI SO	Ant1	5260	2.91	1.9543	≤10	PASS
NTNV	11N20SI SO	Ant1	5280	2.82	1.9143	≤10	PASS
NTNV	11N20SI SO	Ant1	5300	2.94	1.9679	≤10	PASS
NTNV	11N20SI SO	Ant1	5320	2.98	1.9861	≤10	PASS
NTNV	11N20SI SO	Ant1	5500	4.05	2.5410	≤10	PASS
NTNV	11N20SI SO	Ant1	5580	5.58	3.6141	≤10	PASS
NTNV	11N20SI SO	Ant1	5600	2.46	1.7620	≤10	PASS
NTNV	11N20SI SO	Ant1	5700	2.54	1.7947	≤10	PASS
NTNV	11N20SI SO	Ant1	5720	3.78	2.3878	≤10	PASS
NTNV	11N40SI SO	Ant1	5190	2.88	1.9409	≤5	PASS

NTNV	11N40SI SO	Ant1	5230	2.15	1.6406	≤5	PASS
NTNV	11N40SI SO	Ant1	5270	-0.90	0.8128	≤5	PASS
NTNV	11N40SI SO	Ant1	5310	-0.42	0.9078	≤5	PASS
NTNV	11N40SI SO	Ant1	5510	1.22	1.3243	≤5	PASS
NTNV	11N40SI SO	Ant1	5550	1.64	1.4588	≤5	PASS
NTNV	11N40SI SO	Ant1	5670	2.57	1.8072	≤5	PASS
NTNV	11N40SI SO	Ant1	5710	3.19	2.0845	≤5	PASS
NTNV	11AC20S ISO	Ant1	5180	2.85	1.9275	≤10	PASS
NTNV	11AC20S ISO	Ant1	5200	4.21	2.6363	≤10	PASS
NTNV	11AC20S ISO	Ant1	5220	4.66	2.9242	≤10	PASS
NTNV	11AC20S ISO	Ant1	5240	4.02	2.5235	≤10	PASS
NTNV	11AC20S ISO	Ant1	5260	2.98	1.9861	≤10	PASS
NTNV	11AC20S ISO	Ant1	5280	3.68	2.3335	≤10	PASS
NTNV	11AC20S ISO	Ant1	5300	3.62	2.3014	≤10	PASS
NTNV	11AC20S ISO	Ant1	5320	3.90	2.4547	≤10	PASS
NTNV	11AC20S ISO	Ant1	5500	2.06	1.6069	≤10	PASS
NTNV	11AC20S ISO	Ant1	5580	3.72	2.3550	≤10	PASS
NTNV	11AC20S ISO	Ant1	5600	3.19	2.0845	≤10	PASS
NTNV	11AC20S ISO	Ant1	5700	3.96	2.4889	≤10	PASS
NTNV	11AC20S ISO	Ant1	5720	4.64	2.9107	≤10	PASS
NTNV	11AC40S ISO	Ant1	5190	1.98	1.5776	≤5	PASS
NTNV	11AC40S ISO	Ant1	5230	1.12	1.2942	≤5	PASS
NTNV	11AC40S ISO	Ant1	5270	-0.98	0.7980	≤5	PASS
NTNV	11AC40S ISO	Ant1	5310	-0.50	0.8913	≤5	PASS
NTNV	11AC40S ISO	Ant1	5510	1.52	1.4191	≤5	PASS
NTNV	11AC40S ISO	Ant1	5550	2.61	1.8239	≤5	PASS
NTNV	11AC40S ISO	Ant1	5670	-1.93	0.6412	≤5	PASS
NTNV	11AC40S ISO	Ant1	5710	-0.51	0.8892	≤5	PASS
NTNV	11AX20S ISO	Ant1	5180	1.89	1.5453	≤10	PASS
NTNV	11AX20S ISO	Ant1	5200	2.45	1.7579	≤10	PASS
NTNV	11AX20S ISO	Ant1	5220	3.45	2.2131	≤10	PASS

NTNV	11AX20S ISO	Ant1	5240	4.13	2.5882	≤10	PASS
NTNV	11AX20S ISO	Ant1	5260	3.32	2.1478	≤10	PASS
NTNV	11AX20S ISO	Ant1	5280	3.42	2.1979	≤10	PASS
NTNV	11AX20S ISO	Ant1	5300	3.62	2.3014	≤10	PASS
NTNV	11AX20S ISO	Ant1	5320	3.88	2.4434	≤10	PASS
NTNV	11AX20S ISO	Ant1	5500	1.86	1.5346	≤10	PASS
NTNV	11AX20S ISO	Ant1	5580	-0.83	0.8260	≤10	PASS
NTNV	11AX20S ISO	Ant1	5600	-0.60	0.8710	≤10	PASS
NTNV	11AX20S ISO	Ant1	5700	-2.23	0.5984	≤10	PASS
NTNV	11AX20S ISO	Ant1	5720	-1.82	0.6577	≤10	PASS
NTNV	11AX40S ISO	Ant1	5190	-0.21	0.9528	≤5	PASS
NTNV	11AX40S ISO	Ant1	5230	0.23	1.0544	≤5	PASS
NTNV	11AX40S ISO	Ant1	5270	-0.16	0.9638	≤5	PASS
NTNV	11AX40S ISO	Ant1	5310	-1.62	0.6887	≤5	PASS
NTNV	11AX40S ISO	Ant1	5510	-2.05	0.6237	≤5	PASS
NTNV	11AX40S ISO	Ant1	5550	-2.48	0.5649	≤5	PASS
NTNV	11AX40S ISO	Ant1	5670	0.43	1.1041	≤5	PASS
NTNV	11AX40S ISO	Ant1	5710	-2.16	0.6081	≤5	PASS

Tolerance								
Test Condition	Test Mode	Antenna	Frequency [MHz]	Power (mW)	Rated Power (mW)	Result (%)	Limit (%)	Verdict
NTNV	11A	Ant1	5180	1.9498	3	-35.01	-80 to +20	PASS
NTNV	11A	Ant1	5200	2.2491	3	-25.03	-80 to +20	PASS
NTNV	11A	Ant1	5220	2.7925	3	-6.92	-80 to +20	PASS
NTNV	11A	Ant1	5240	3.1769	3	5.90	-80 to +20	PASS
NTNV	11A	Ant1	5260	1.8072	2.5	-27.71	-80 to +20	PASS
NTNV	11A	Ant1	5280	1.9861	2.5	-20.56	-80 to +20	PASS
NTNV	11A	Ant1	5300	1.9409	2.5	-22.36	-80 to +20	PASS
NTNV	11A	Ant1	5320	2.1380	2.5	-14.48	-80 to +20	PASS
NTNV	11A	Ant1	5500	3.0903	3	3.01	-50 to +50	PASS
NTNV	11A	Ant1	5580	3.8548	3	28.49	-50 to +50	PASS

							+50	
NTNV	11A	Ant1	5600	2.5468	3	-15.11	-50 to +50	PASS
NTNV	11A	Ant1	5700	2.7606	3	-7.98	-50 to +50	PASS
NTNV	11A	Ant1	5720	2.5177	3	-16.08	-50 to +50	PASS
NTNV	11N20SI SO	Ant1	5180	4.4463	5	-11.07	-80 to +20	PASS
NTNV	11N20SI SO	Ant1	5200	4.5394	5	-9.21	-80 to +20	PASS
NTNV	11N20SI SO	Ant1	5220	1.3305	2	-33.48	-80 to +20	PASS
NTNV	11N20SI SO	Ant1	5240	2.2646	2	13.23	-80 to +20	PASS
NTNV	11N20SI SO	Ant1	5260	1.9543	2	-2.29	-80 to +20	PASS
NTNV	11N20SI SO	Ant1	5280	1.9143	2	-4.29	-80 to +20	PASS
NTNV	11N20SI SO	Ant1	5300	1.9679	2	-1.61	-80 to +20	PASS
NTNV	11N20SI SO	Ant1	5320	1.9861	2	-0.70	-80 to +20	PASS
NTNV	11N20SI SO	Ant1	5500	2.5410	3	-15.30	-50 to +50	PASS
NTNV	11N20SI SO	Ant1	5580	3.6141	3	20.47	-50 to +50	PASS
NTNV	11N20SI SO	Ant1	5600	1.7620	2	-11.90	-50 to +50	PASS
NTNV	11N20SI SO	Ant1	5700	1.7947	2	-10.27	-50 to +50	PASS
NTNV	11N20SI SO	Ant1	5720	2.3878	2	19.39	-50 to +50	PASS
NTNV	11N40SI SO	Ant1	5190	1.9409	2.5	-22.36	-80 to +20	PASS
NTNV	11N40SI SO	Ant1	5230	1.6406	2.5	-34.38	-80 to +20	PASS
NTNV	11N40SI SO	Ant1	5270	0.8128	1	-18.72	-80 to +20	PASS
NTNV	11N40SI SO	Ant1	5310	0.9078	1	-9.22	-80 to +20	PASS
NTNV	11N40SI SO	Ant1	5510	1.3243	2	-33.79	-50 to +50	PASS
NTNV	11N40SI SO	Ant1	5550	1.4588	2	-27.06	-50 to +50	PASS
NTNV	11N40SI SO	Ant1	5670	1.8072	2	-9.64	-50 to +50	PASS
NTNV	11N40SI SO	Ant1	5710	2.0845	2	4.22	-50 to +50	PASS
NTNV	11AC20 SISO	Ant1	5180	1.9275	2.5	-22.90	-80 to +20	PASS
NTNV	11AC20 SISO	Ant1	5200	2.6363	2.5	5.45	-80 to +20	PASS
NTNV	11AC20 SISO	Ant1	5220	2.9242	2.5	16.97	-80 to +20	PASS
NTNV	11AC20 SISO	Ant1	5240	2.5235	2.5	0.94	-80 to +20	PASS
NTNV	11AC20 SISO	Ant1	5260	1.9861	2.5	-20.56	-80 to +20	PASS
NTNV	11AC20 SISO	Ant1	5280	2.3335	2.5	-6.66	-80 to +20	PASS
NTNV	11AC20	Ant1	5300	2.3014	2.5	-7.94	-80 to	PASS

	SISO						+20	
NTNV	11AC20 SISO	Ant1	5320	2.4547	2.5	-1.81	-80 to +20	PASS
NTNV	11AC20 SISO	Ant1	5500	1.6069	2.5	-35.72	-50 to +50	PASS
NTNV	11AC20 SISO	Ant1	5580	2.3550	2.5	-5.80	-50 to +50	PASS
NTNV	11AC20 SISO	Ant1	5600	2.0845	2.5	-16.62	-50 to +50	PASS
NTNV	11AC20 SISO	Ant1	5700	2.4889	2.5	-0.44	-50 to +50	PASS
NTNV	11AC20 SISO	Ant1	5720	2.9107	2.5	16.43	-50 to +50	PASS
NTNV	11AC40 SISO	Ant1	5190	1.5776	2.5	-36.90	-80 to +20	PASS
NTNV	11AC40 SISO	Ant1	5230	1.2942	2.5	-48.23	-80 to +20	PASS
NTNV	11AC40 SISO	Ant1	5270	0.7980	1	-20.20	-80 to +20	PASS
NTNV	11AC40 SISO	Ant1	5310	0.8913	1	-10.87	-80 to +20	PASS
NTNV	11AC40 SISO	Ant1	5510	1.4191	2	-29.05	-50 to +50	PASS
NTNV	11AC40 SISO	Ant1	5550	1.8239	2	-8.81	-50 to +50	PASS
NTNV	11AC40 SISO	Ant1	5670	0.6412	1	-35.88	-50 to +50	PASS
NTNV	11AC40 SISO	Ant1	5710	0.8892	1	-11.08	-50 to +50	PASS
NTNV	11AX20S ISO	Ant1	5180	1.5453	2.5	-38.19	-80 to +20	PASS
NTNV	11AX20S ISO	Ant1	5200	1.7579	2.5	-29.68	-80 to +20	PASS
NTNV	11AX20S ISO	Ant1	5220	2.2131	2.5	-11.48	-80 to +20	PASS
NTNV	11AX20S ISO	Ant1	5240	2.5882	2.5	3.53	-80 to +20	PASS
NTNV	11AX20S ISO	Ant1	5260	2.1478	2.5	-14.09	-80 to +20	PASS
NTNV	11AX20S ISO	Ant1	5280	2.1979	2.5	-12.08	-80 to +20	PASS
NTNV	11AX20S ISO	Ant1	5300	2.3014	2.5	-7.94	-80 to +20	PASS
NTNV	11AX20S ISO	Ant1	5320	2.4434	2.5	-2.26	-80 to +20	PASS
NTNV	11AX20S ISO	Ant1	5500	1.5346	2.5	-38.62	-50 to +50	PASS
NTNV	11AX20S ISO	Ant1	5580	0.8260	1	-17.40	-50 to +50	PASS
NTNV	11AX20S ISO	Ant1	5600	0.8710	1	-12.90	-50 to +50	PASS
NTNV	11AX20S ISO	Ant1	5700	0.5984	1	-40.16	-50 to +50	PASS
NTNV	11AX20S ISO	Ant1	5720	0.6577	1	-34.23	-50 to +50	PASS
NTNV	11AX40S ISO	Ant1	5190	0.9528	1	-4.72	-80 to +20	PASS
NTNV	11AX40S ISO	Ant1	5230	1.0544	1	5.44	-80 to +20	PASS
NTNV	11AX40S ISO	Ant1	5270	0.9638	1	-3.62	-80 to +20	PASS
NTNV	11AX40S	Ant1	5310	0.6887	1	-31.13	-80 to	PASS

	ISO						+20	
NTNV	11AX40S ISO	Ant1	5510	0.6237	1	-37.63	-50 to +50	PASS
NTNV	11AX40S ISO	Ant1	5550	0.5649	1	-43.51	-50 to +50	PASS
NTNV	11AX40S ISO	Ant1	5670	1.1041	1	10.41	-50 to +50	PASS
NTNV	11AX40S ISO	Ant1	5710	0.6081	1	-39.19	-50 to +50	PASS

EIRP							
TestCondition	TestMode	Antenna	Frequen cy[MHz]	Result(mW)	EIRP(mW)	Limit(mW)	Verdict
NTNV	11A	Ant1	5180	1.9498	3.8547	≤10	PASS
NTNV	11A	Ant1	5200	2.2491	4.4464	≤10	PASS
NTNV	11A	Ant1	5220	2.7925	5.5207	≤10	PASS
NTNV	11A	Ant1	5240	3.1769	6.2806	≤10	PASS
NTNV	11A	Ant1	5260	1.8072	3.5727	≤5	PASS
NTNV	11A	Ant1	5280	1.9861	3.9264	≤5	PASS
NTNV	11A	Ant1	5300	1.9409	3.8371	≤5	PASS
NTNV	11A	Ant1	5320	2.1380	4.2267	≤5	PASS
NTNV	11A	Ant1	5500	3.0903	6.1094	≤25	PASS
NTNV	11A	Ant1	5580	3.8548	7.6208	≤25	PASS
NTNV	11A	Ant1	5600	2.5468	5.0349	≤25	PASS
NTNV	11A	Ant1	5700	2.7606	5.4576	≤25	PASS
NTNV	11A	Ant1	5720	2.5177	4.9774	≤25	PASS
NTNV	11N20SI SO	Ant1	5180	4.4463	8.7902	≤10	PASS
NTNV	11N20SI SO	Ant1	5200	4.5394	8.9743	≤10	PASS
NTNV	11N20SI SO	Ant1	5220	1.3305	2.6304	≤10	PASS
NTNV	11N20SI SO	Ant1	5240	2.2646	4.4770	≤10	PASS
NTNV	11N20SI SO	Ant1	5260	1.9543	3.8636	≤5	PASS
NTNV	11N20SI SO	Ant1	5280	1.9143	3.7845	≤5	PASS
NTNV	11N20SI SO	Ant1	5300	1.9679	3.8905	≤5	PASS
NTNV	11N20SI SO	Ant1	5320	1.9861	3.9265	≤5	PASS
NTNV	11N20SI SO	Ant1	5500	2.5410	5.0235	≤25	PASS
NTNV	11N20SI SO	Ant1	5580	3.6141	7.1450	≤25	PASS
NTNV	11N20SI SO	Ant1	5600	1.7620	3.4834	≤25	PASS
NTNV	11N20SI SO	Ant1	5700	1.7947	3.5481	≤25	PASS
NTNV	11N20SI SO	Ant1	5720	2.3878	4.7206	≤25	PASS
NTNV	11N40SI SO	Ant1	5190	1.9409	3.8371	≤5	PASS
NTNV	11N40SI SO	Ant1	5230	1.6406	3.2434	≤5	PASS

NTNV	11N40SI SO	Ant1	5270	0.8128	1.6069	≤2.5	PASS
NTNV	11N40SI SO	Ant1	5310	0.9078	1.7947	≤2.5	PASS
NTNV	11N40SI SO	Ant1	5510	1.3243	2.6181	≤12.5	PASS
NTNV	11N40SI SO	Ant1	5550	1.4588	2.8840	≤12.5	PASS
NTNV	11N40SI SO	Ant1	5670	1.8072	3.5728	≤12.5	PASS
NTNV	11N40SI SO	Ant1	5710	2.0845	4.1210	≤12.5	PASS
NTNV	11AC20S ISO	Ant1	5180	1.9275	3.8106	≤10	PASS
NTNV	11AC20S ISO	Ant1	5200	2.6363	5.2119	≤10	PASS
NTNV	11AC20S ISO	Ant1	5220	2.9242	5.7811	≤10	PASS
NTNV	11AC20S ISO	Ant1	5240	2.5235	4.9889	≤10	PASS
NTNV	11AC20S ISO	Ant1	5260	1.9861	3.9265	≤5	PASS
NTNV	11AC20S ISO	Ant1	5280	2.3335	4.6133	≤5	PASS
NTNV	11AC20S ISO	Ant1	5300	2.3014	4.5498	≤5	PASS
NTNV	11AC20S ISO	Ant1	5320	2.4547	4.8529	≤5	PASS
NTNV	11AC20S ISO	Ant1	5500	1.6069	3.1768	≤25	PASS
NTNV	11AC20S ISO	Ant1	5580	2.3550	4.6558	≤25	PASS
NTNV	11AC20S ISO	Ant1	5600	2.0845	4.1210	≤25	PASS
NTNV	11AC20S ISO	Ant1	5700	2.4889	4.9205	≤25	PASS
NTNV	11AC20S ISO	Ant1	5720	2.9107	5.7544	≤25	PASS
NTNV	11AC40S ISO	Ant1	5190	1.5776	3.1189	≤5	PASS
NTNV	11AC40S ISO	Ant1	5230	1.2942	2.5586	≤5	PASS
NTNV	11AC40S ISO	Ant1	5270	0.7980	1.5776	≤2.5	PASS
NTNV	11AC40S ISO	Ant1	5310	0.8913	1.7621	≤2.5	PASS
NTNV	11AC40S ISO	Ant1	5510	1.4191	2.8055	≤12.5	PASS
NTNV	11AC40S ISO	Ant1	5550	1.8239	3.6058	≤12.5	PASS
NTNV	11AC40S ISO	Ant1	5670	0.6412	1.2676	≤12.5	PASS
NTNV	11AC40S ISO	Ant1	5710	0.8892	1.7579	≤12.5	PASS
NTNV	11AX20S ISO	Ant1	5180	1.5453	3.0550	≤10	PASS
NTNV	11AX20S ISO	Ant1	5200	1.7579	3.4753	≤10	PASS
NTNV	11AX20S ISO	Ant1	5220	2.2131	4.3752	≤10	PASS
NTNV	11AX20S ISO	Ant1	5240	2.5882	5.1168	≤10	PASS

NTNV	11AX20S ISO	Ant1	5260	2.1478	4.2461	≤5	PASS
NTNV	11AX20S ISO	Ant1	5280	2.1979	4.3452	≤5	PASS
NTNV	11AX20S ISO	Ant1	5300	2.3014	4.5498	≤5	PASS
NTNV	11AX20S ISO	Ant1	5320	2.4434	4.8305	≤5	PASS
NTNV	11AX20S ISO	Ant1	5500	1.5346	3.0339	≤25	PASS
NTNV	11AX20S ISO	Ant1	5580	0.8260	1.6330	≤25	PASS
NTNV	11AX20S ISO	Ant1	5600	0.8710	1.7219	≤25	PASS
NTNV	11AX20S ISO	Ant1	5700	0.5984	1.1830	≤25	PASS
NTNV	11AX20S ISO	Ant1	5720	0.6577	1.3003	≤25	PASS
NTNV	11AX40S ISO	Ant1	5190	0.9528	1.8837	≤5	PASS
NTNV	11AX40S ISO	Ant1	5230	1.0544	2.0845	≤5	PASS
NTNV	11AX40S ISO	Ant1	5270	0.9638	1.9054	≤2.5	PASS
NTNV	11AX40S ISO	Ant1	5310	0.6887	1.3615	≤2.5	PASS
NTNV	11AX40S ISO	Ant1	5510	0.6237	1.2330	≤12.5	PASS
NTNV	11AX40S ISO	Ant1	5550	0.5649	1.1168	≤12.5	PASS
NTNV	11AX40S ISO	Ant1	5670	1.1041	2.1828	≤12.5	PASS
NTNV	11AX40S ISO	Ant1	5710	0.6081	1.2022	≤12.5	PASS

