

Appendix: 5G Wi-Fi Band 1

Contents

Contents.....	2
Antenna Power.....	3
EIRP Power.....	3
Occupied Channel Bandwidth	4
Burst Length.....	12
Adjacent Channel Emitted Power	20
Carrier Sense.....	29
Spurious Emission of TX	32
Spurious Emission of RX.....	78
Frequency Error	94

Antenna Power


Condition	Mode	Frequency (MHz)	Antenna	Power (dBm/MHz)	Antenna Power (mW/MHz)	Limit (mW/MHz)	Declared Power (mW/MHz)	Tolerance (%)	Upper Limit (%)	Lower Limit (%)	Verdict
NVNT	a	5180	Ant1	7.04	5.06	10	5.40	-49.40	+20	-80	Pass
NVNT	a	5200	Ant1	6.94	4.94	10	5.40	-50.60	+20	-80	Pass
NVNT	a	5240	Ant1	7.44	5.55	10	5.40	-44.50	+20	-80	Pass
NVNT	n20	5180	Ant1	6.78	4.76	10	5.00	-52.40	+20	-80	Pass
NVNT	n20	5200	Ant1	6.35	4.32	10	5.00	-56.80	+20	-80	Pass
NVNT	n20	5240	Ant1	6.79	4.78	10	5.00	-52.20	+20	-80	Pass
NVNT	n40	5190	Ant1	3.03	2.01	5	5.00	-59.80	+20	-80	Pass
NVNT	n40	5230	Ant1	3.09	2.04	5	5.00	-59.20	+20	-80	Pass
NVNT	ac20	5180	Ant1	6.9	4.9	10	5.00	-51.00	+20	-80	Pass
NVNT	ac20	5200	Ant1	6.49	4.46	10	5.00	-55.40	+20	-80	Pass
NVNT	ac20	5240	Ant1	6.92	4.92	10	5.00	-50.80	+20	-80	Pass
NVNT	ac40	5190	Ant1	2.82	1.91	5	5.00	-61.80	+20	-80	Pass
NVNT	ac40	5230	Ant1	3.11	2.05	5	5.00	-59.00	+20	-80	Pass
NVNT	ac80	5210	Ant1	-2.94	0.51	2.5	2.50	-79.60	+20	-80	Pass

EIRP Power


Condition	Mode	Frequency (MHz)	Antenna	Antenna Power (dBm/MHz)	Gain (dBi)	EIRP Power (mW/MHz)	Limit (mW/MHz)	Verdict
NVNT	a	5180	Ant1	7.04	2.47	8.93	10	Pass
NVNT	a	5200	Ant1	6.94	2.47	8.73	10	Pass
NVNT	a	5240	Ant1	7.44	2.47	9.79	10	Pass
NVNT	n20	5180	Ant1	6.78	2.47	8.41	10	Pass
NVNT	n20	5200	Ant1	6.35	2.47	7.62	10	Pass
NVNT	n20	5240	Ant1	6.79	2.47	8.43	10	Pass
NVNT	n40	5190	Ant1	3.03	2.47	3.55	5	Pass
NVNT	n40	5230	Ant1	3.10	2.47	3.6	5	Pass
NVNT	ac20	5180	Ant1	6.90	2.47	8.65	10	Pass
NVNT	ac20	5200	Ant1	6.49	2.47	7.87	10	Pass
NVNT	ac20	5240	Ant1	6.92	2.47	8.69	10	Pass
NVNT	ac40	5190	Ant1	2.81	2.47	3.38	5	Pass
NVNT	ac40	5230	Ant1	3.12	2.47	3.61	5	Pass
NVNT	ac80	5210	Ant1	-2.92	2.47	0.9	2.5	Pass

Occupied Channel Bandwidth



Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	Limit (MHz)	Verdict
NVNT	a	5180	Ant1	16.783	≤ 20	Pass
NVNT	a	5200	Ant1	16.783	≤ 20	Pass
NVNT	a	5240	Ant1	16.783	≤ 20	Pass
NVNT	n20	5180	Ant1	17.902	≤ 20	Pass
NVNT	n20	5200	Ant1	17.862	≤ 20	Pass
NVNT	n20	5240	Ant1	17.902	≤ 20	Pass
NVNT	n40	5190	Ant1	36.044	≤ 40	Pass
NVNT	n40	5230	Ant1	36.044	≤ 40	Pass
NVNT	ac20	5180	Ant1	17.902	≤ 20	Pass
NVNT	ac20	5200	Ant1	17.902	≤ 20	Pass
NVNT	ac20	5240	Ant1	17.902	≤ 20	Pass
NVNT	ac40	5190	Ant1	36.124	≤ 40	Pass
NVNT	ac40	5230	Ant1	36.044	≤ 40	Pass
NVNT	ac80	5210	Ant1	75.604	≤ 80	Pass

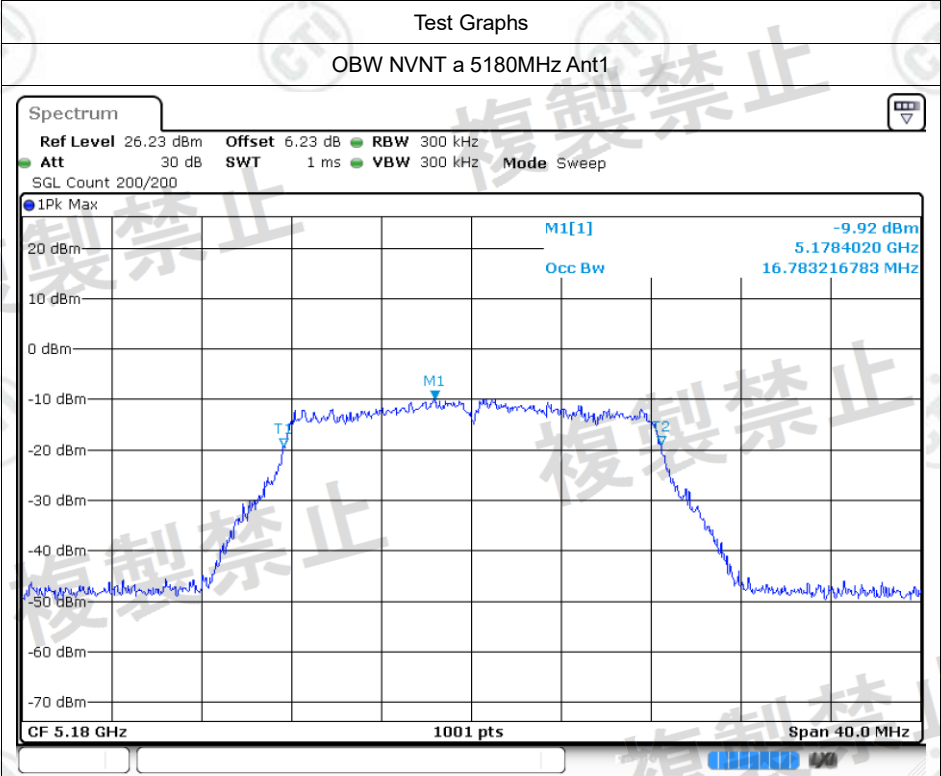


Date: 6.NOV.2024 15:17:52

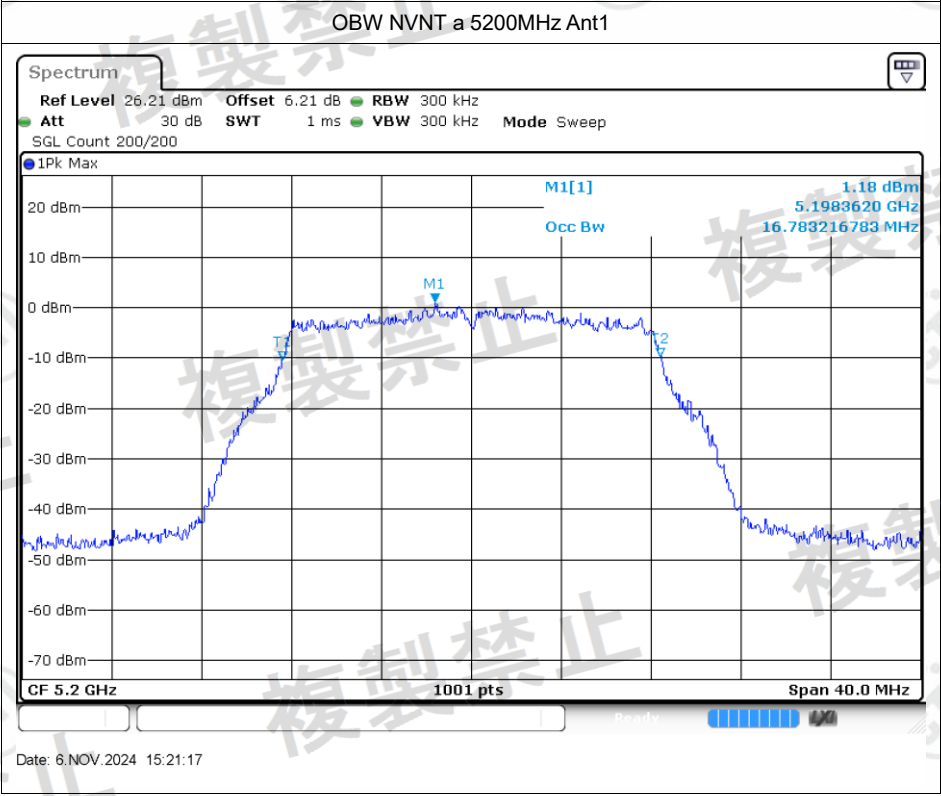


Date: 6.NOV.2024 15:21:17

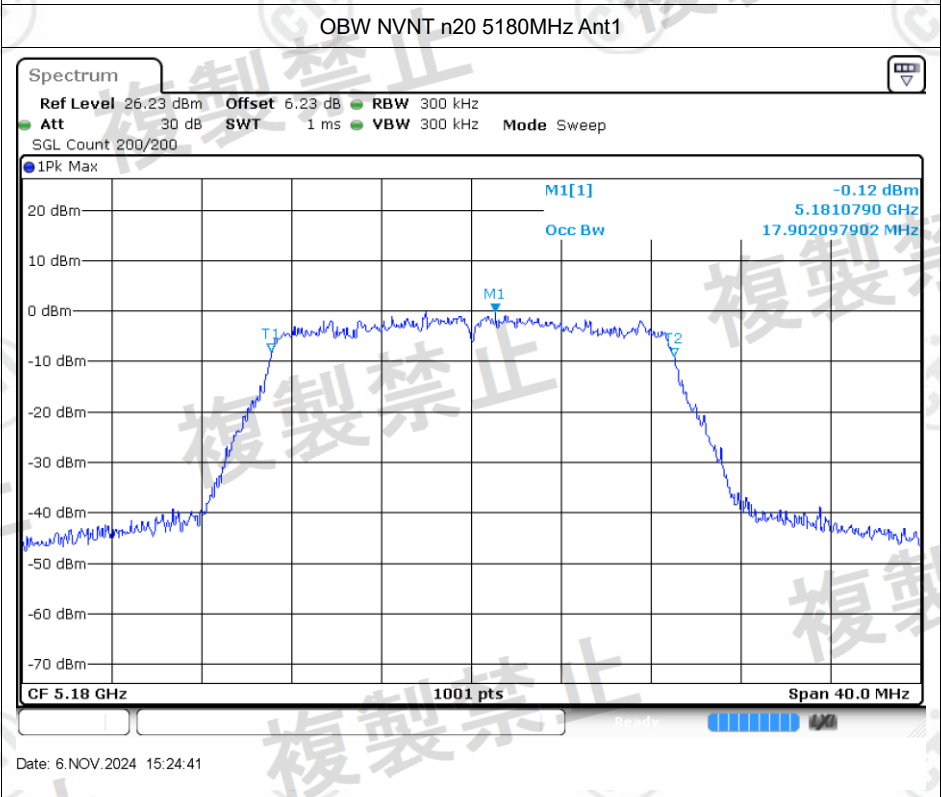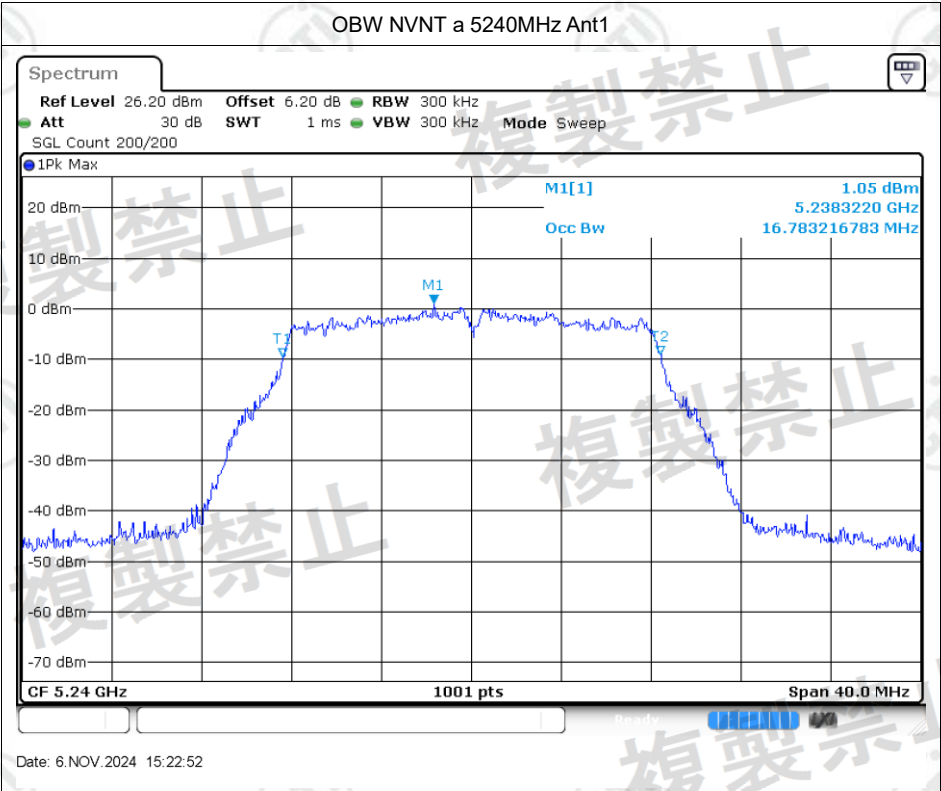




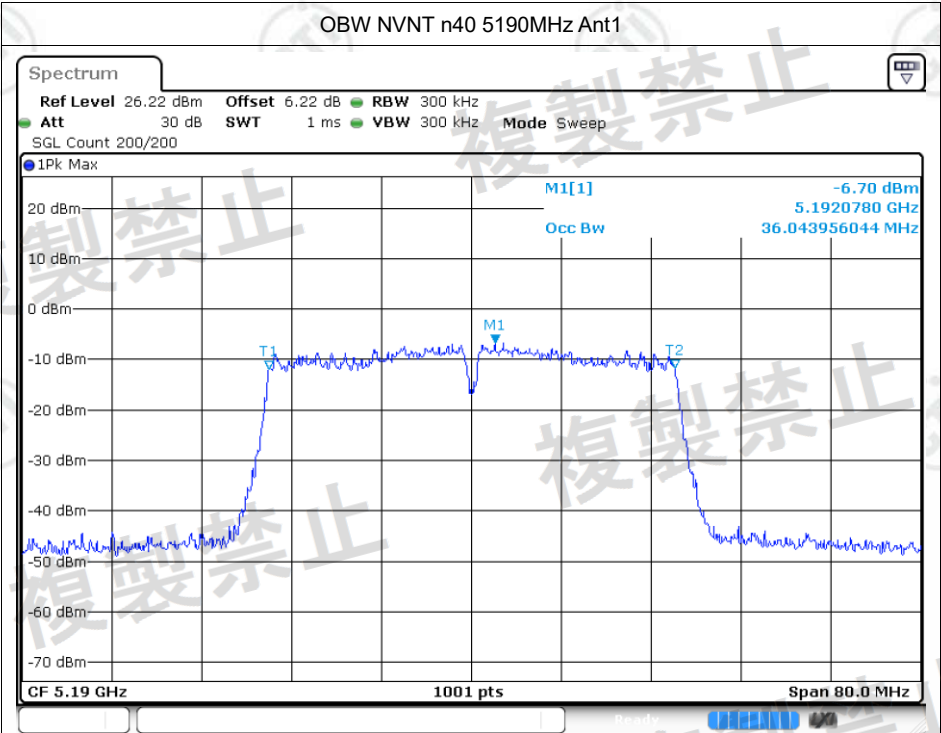


Date: 6.NOV.2024 15:28:13

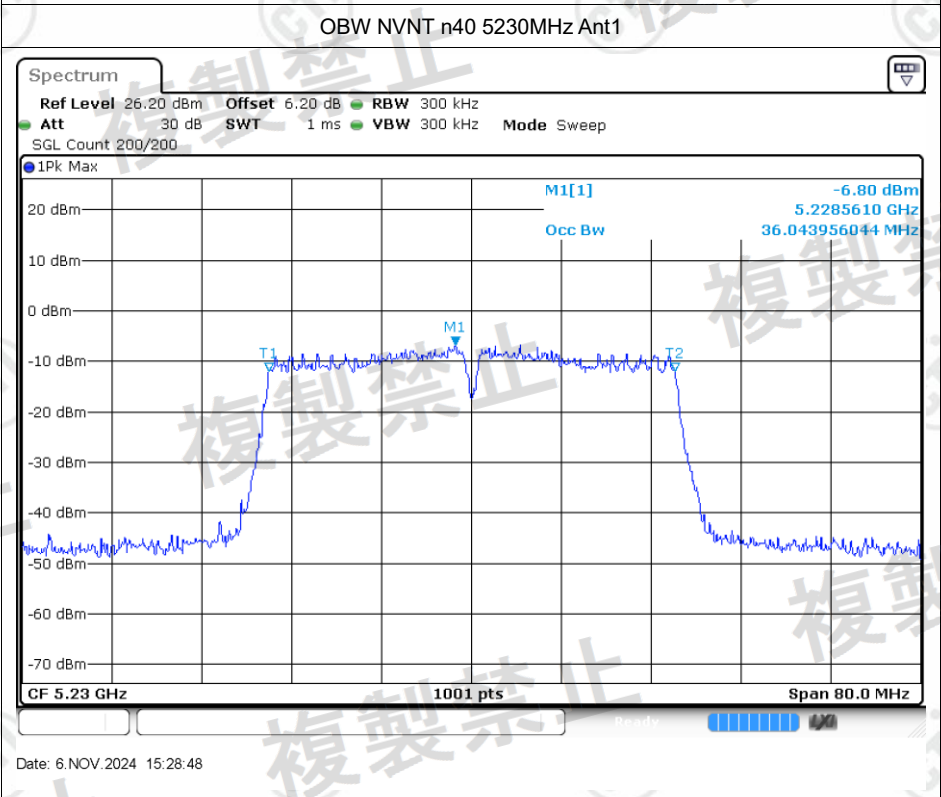



Date: 6.NOV.2024 15:28:48

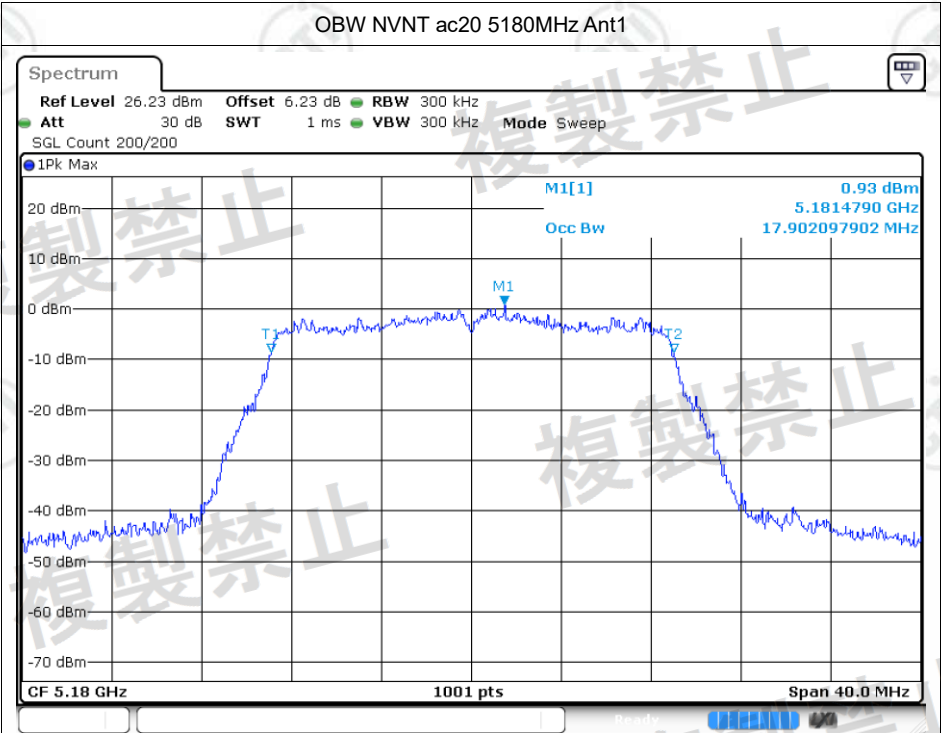


Date: 6.NOV.2024 15:29:25

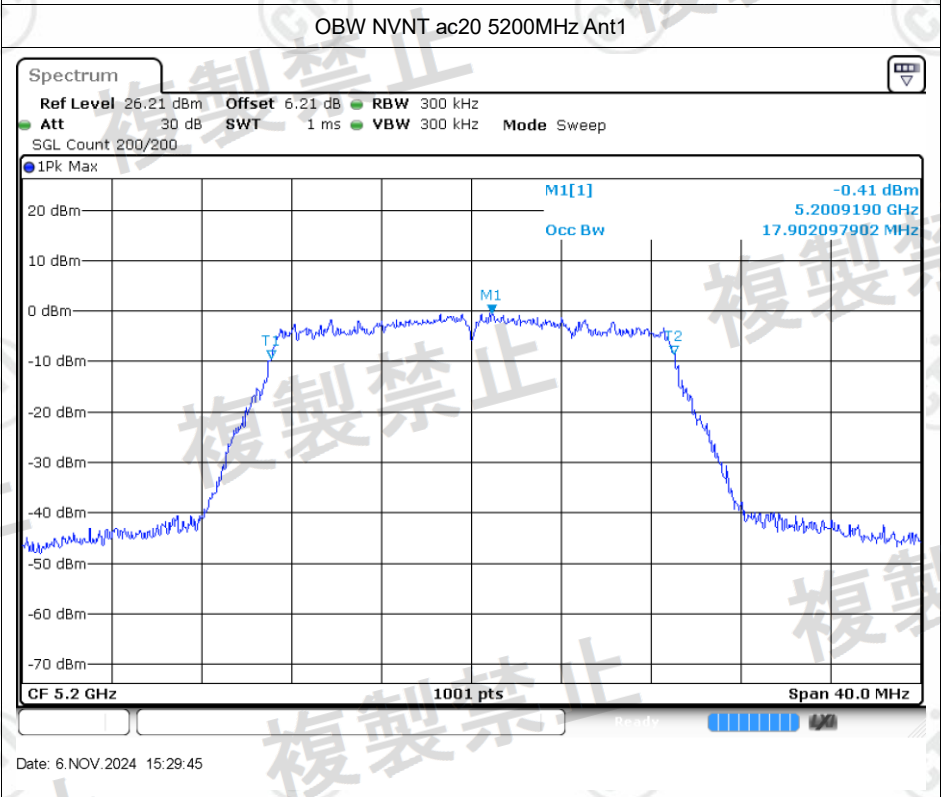


Date: 6.NOV.2024 15:29:45

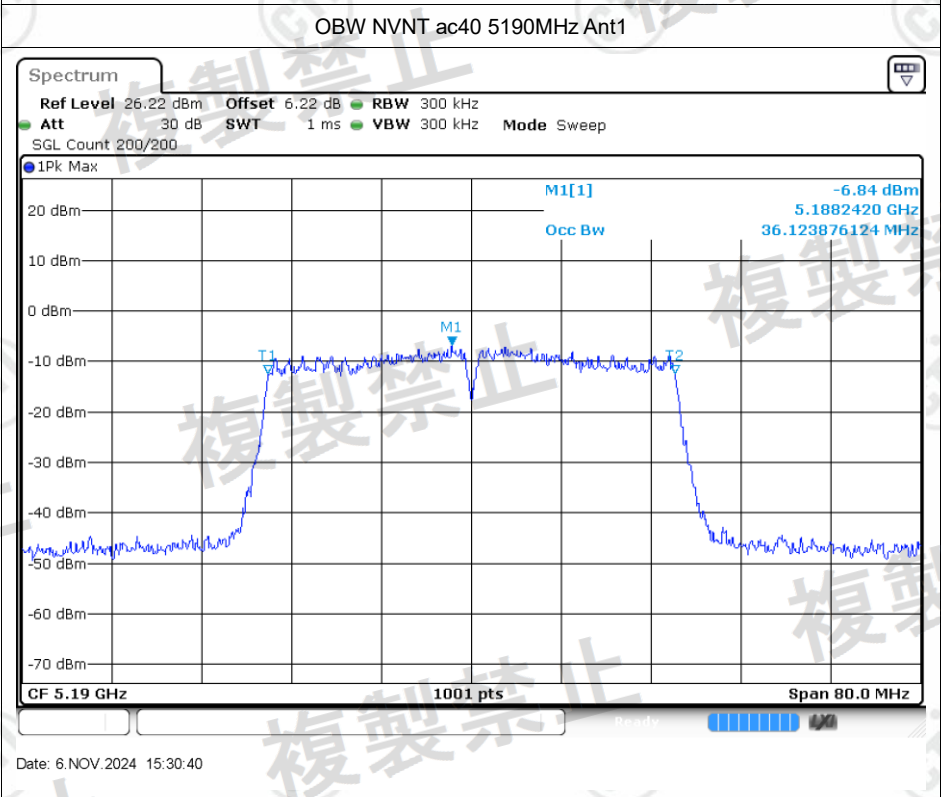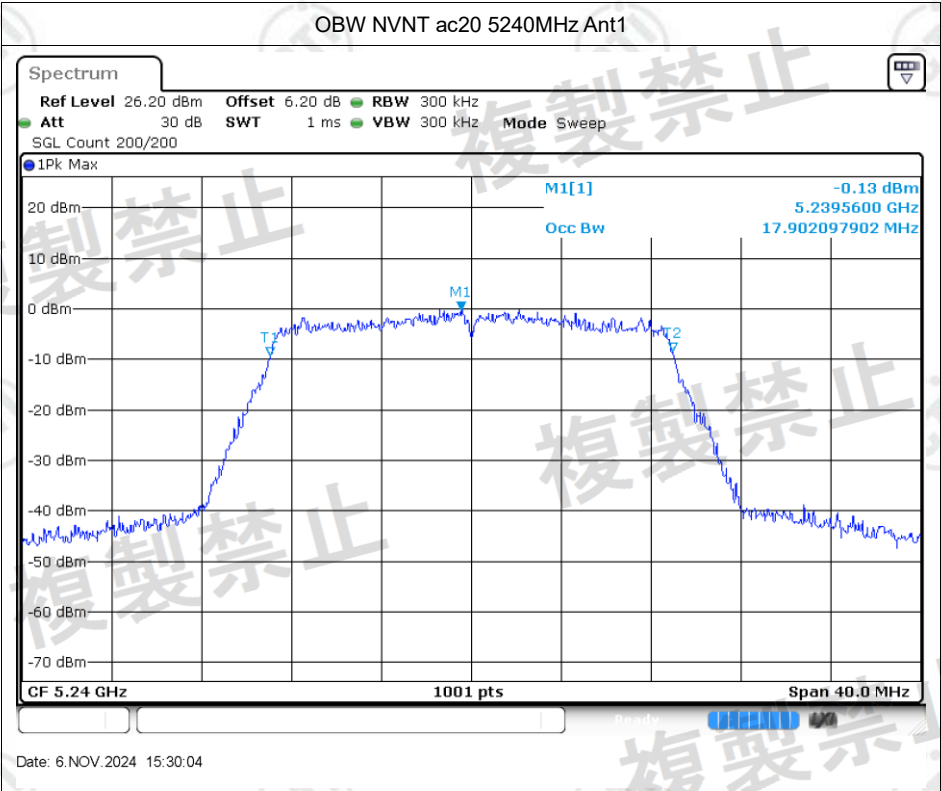

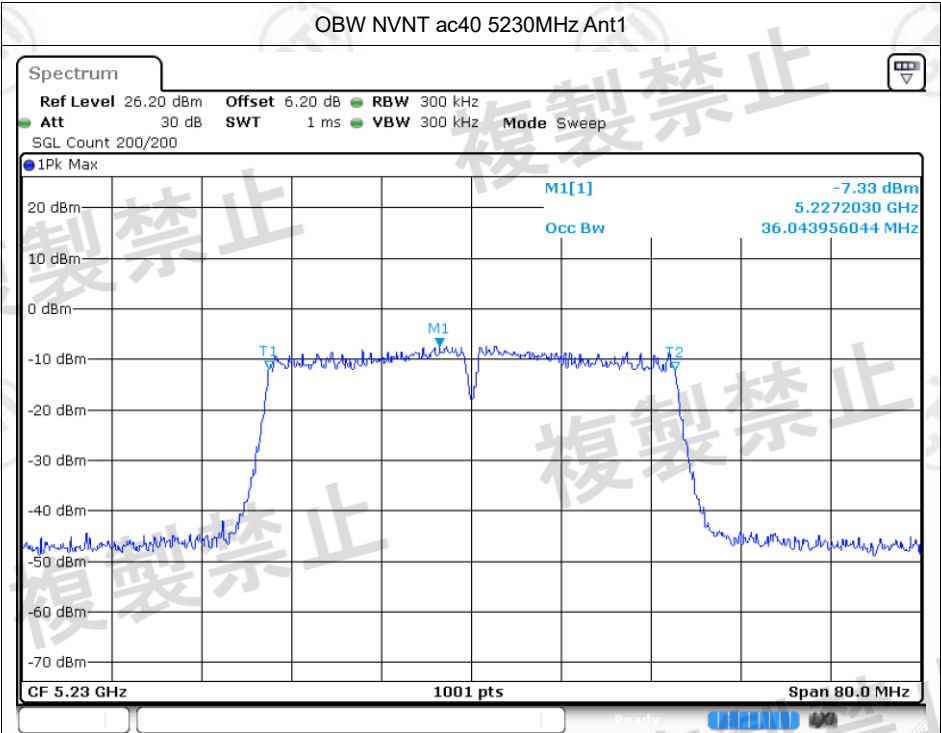


Date: 6.NOV.2024 15:31:14


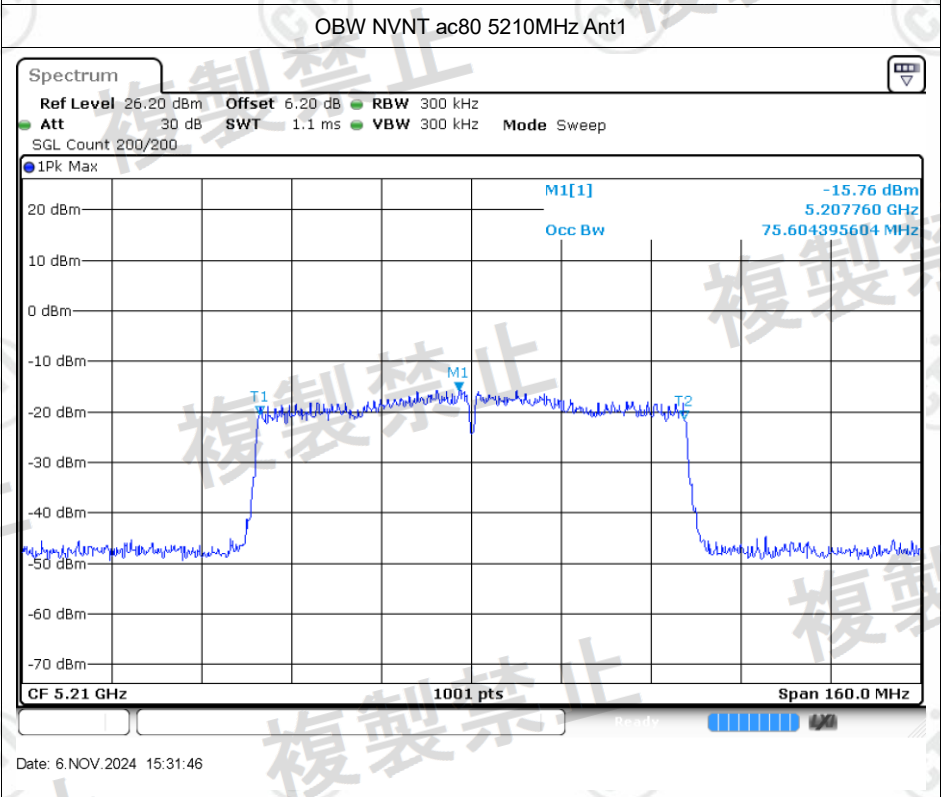




Date: 6.NOV.2024 15:31:46



Burst Length


Condition	Mode	Frequency (MHz)	Antenna	Burst Length (ms)	Limit (ms)	Verdict
NVNT	a	Ant1	5180	1.4	≤ 8	Pass
NVNT	a	Ant1	5200	1.39	≤ 8	Pass
NVNT	a	Ant1	5240	1.4	≤ 8	Pass
NVNT	n20	Ant1	5180	1.31	≤ 8	Pass
NVNT	n20	Ant1	5200	1.31	≤ 8	Pass
NVNT	n20	Ant1	5240	1.31	≤ 8	Pass
NVNT	n40	Ant1	5190	0.655	≤ 8	Pass
NVNT	n40	Ant1	5230	0.655	≤ 8	Pass
NVNT	ac20	Ant1	5180	1.35	≤ 8	Pass
NVNT	ac20	Ant1	5200	1.34	≤ 8	Pass
NVNT	ac20	Ant1	5240	1.35	≤ 8	Pass
NVNT	ac40	Ant1	5190	0.66	≤ 8	Pass
NVNT	ac40	Ant1	5230	0.66	≤ 8	Pass
NVNT	ac80	Ant1	5210	0.31	≤ 8	Pass

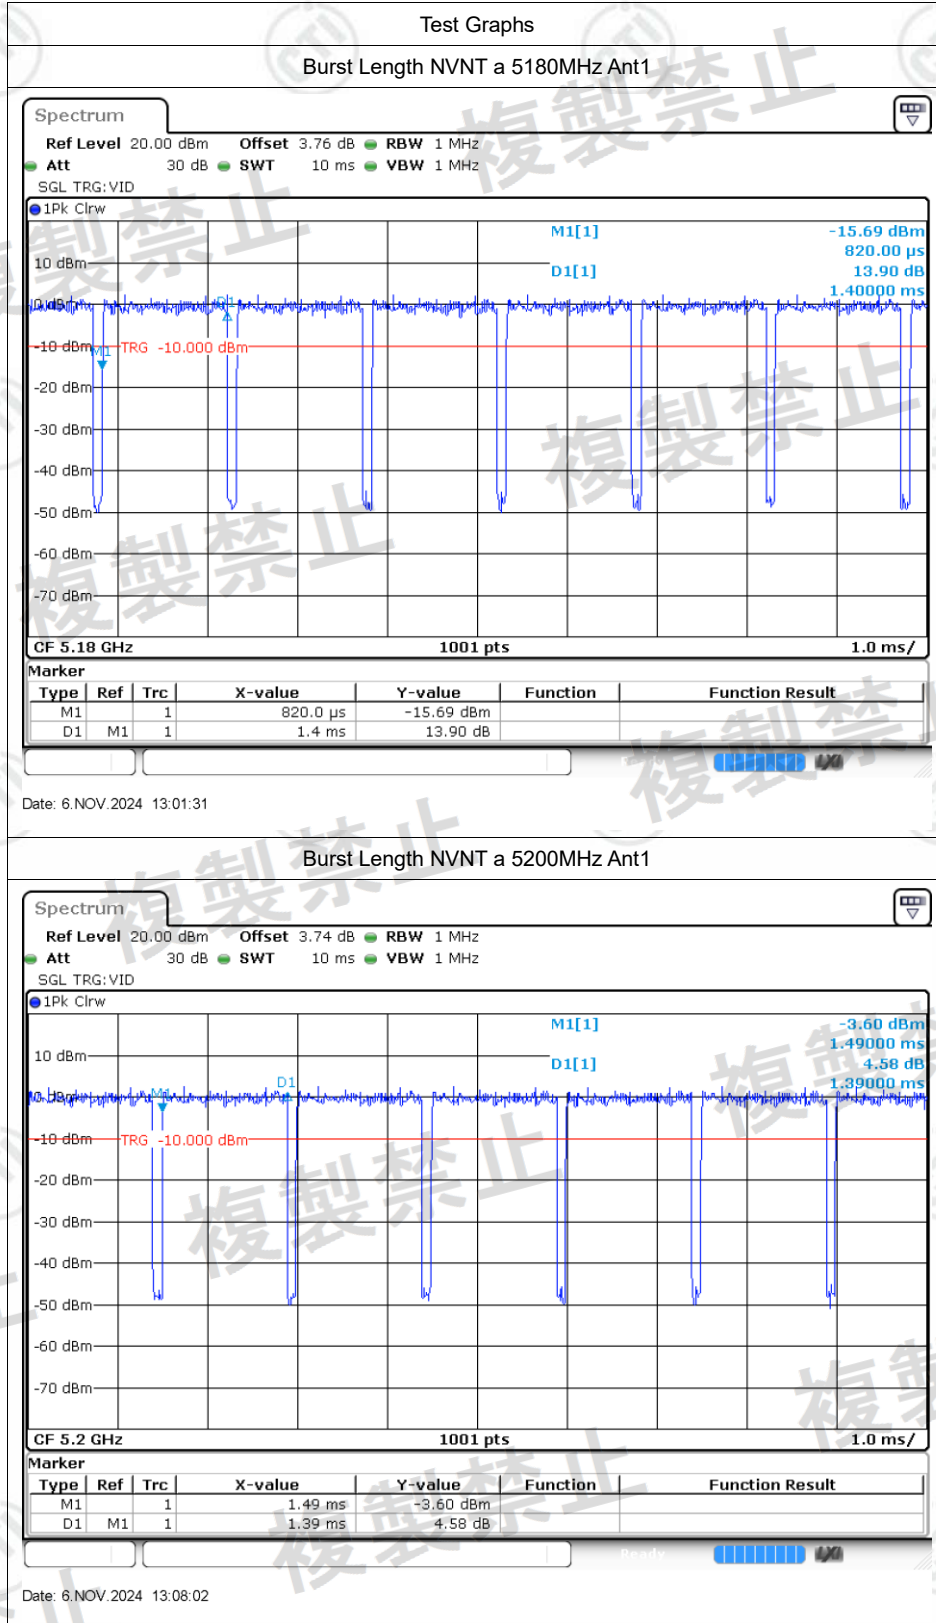

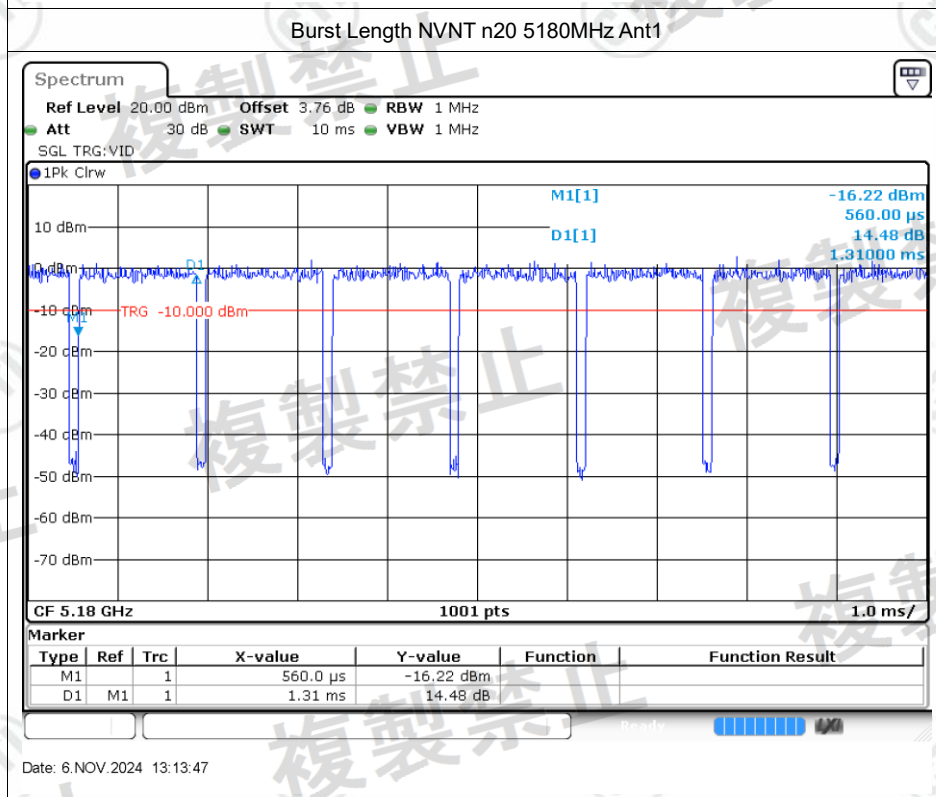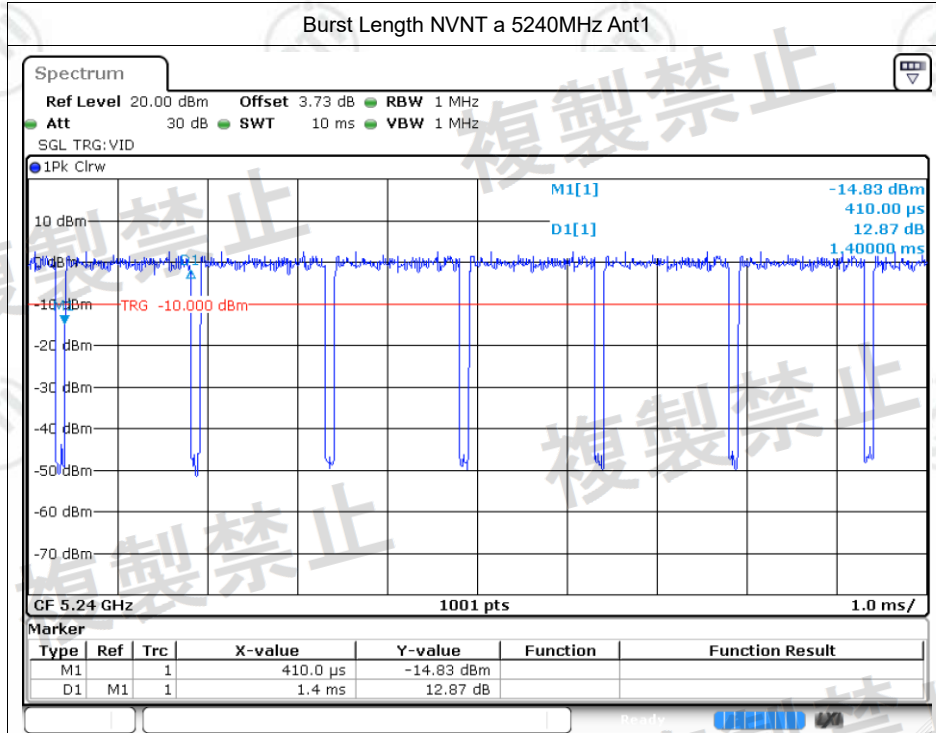


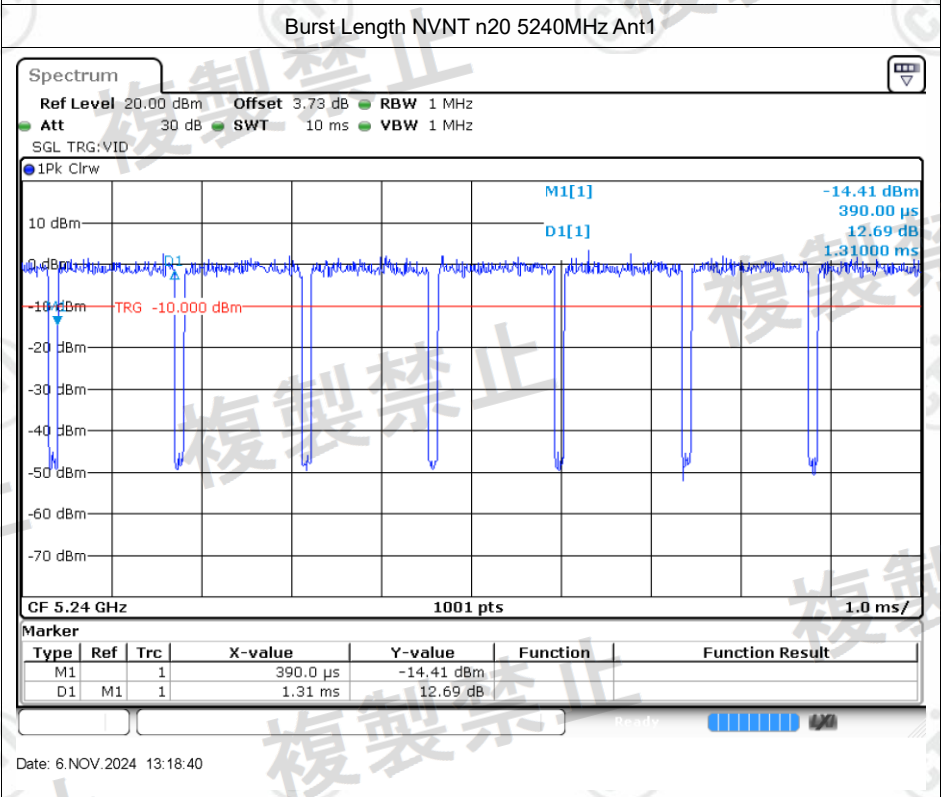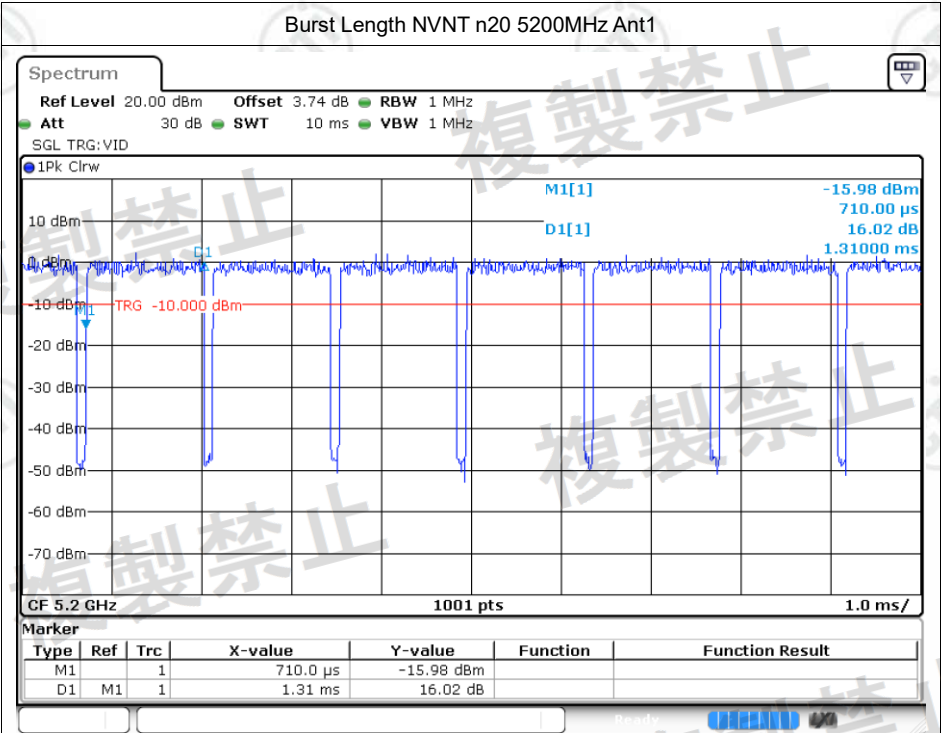

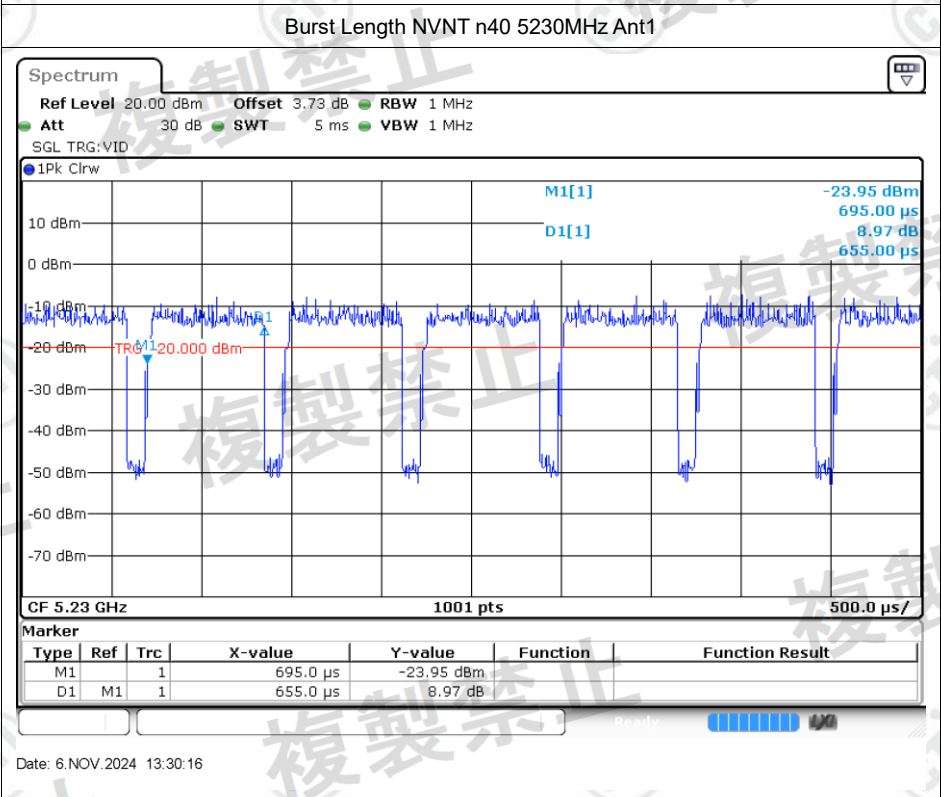
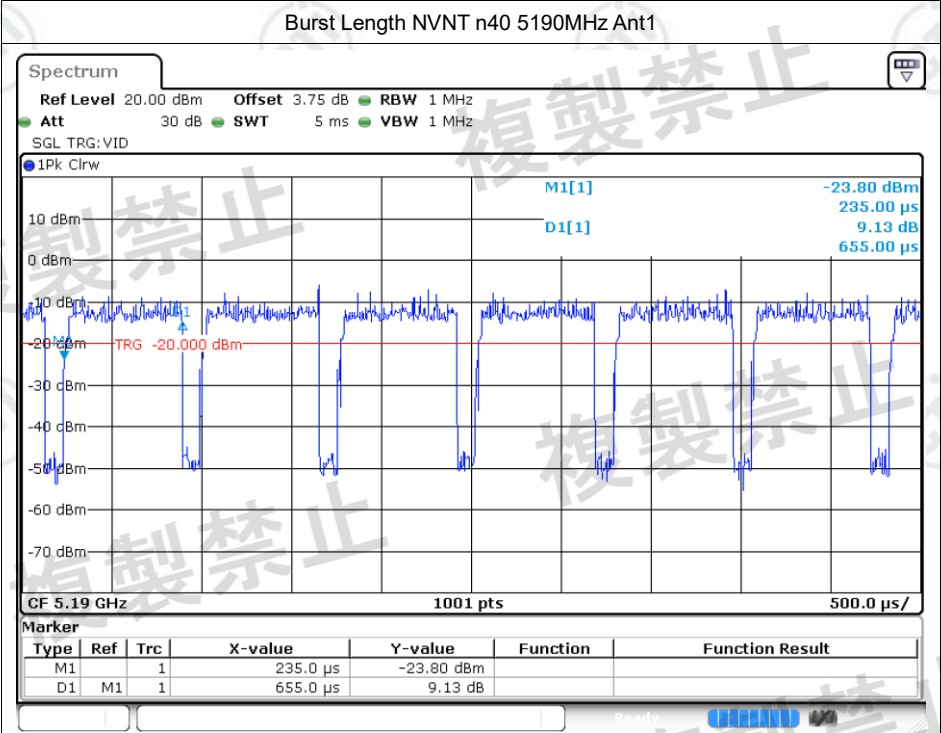



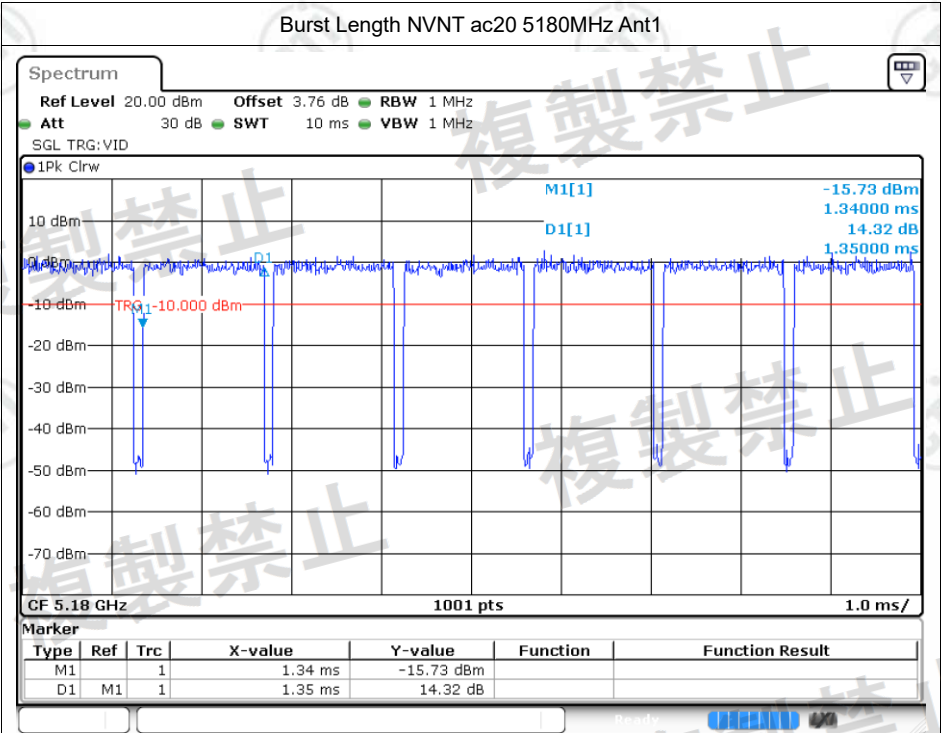


Date: 6.NOV.2024 13:33:00

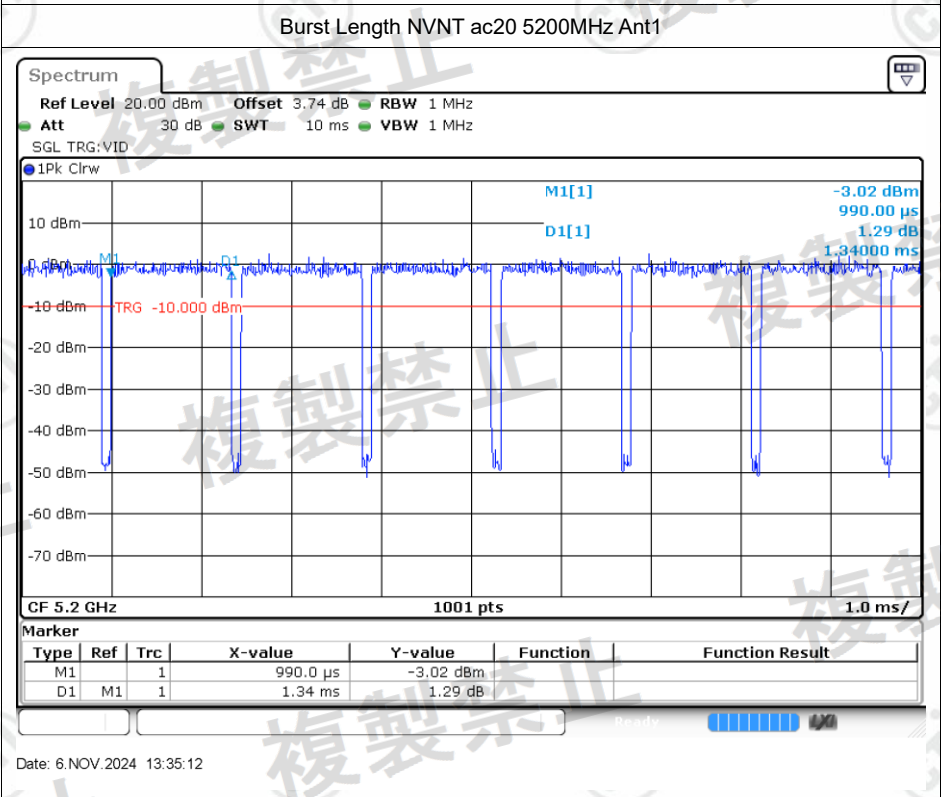

Date: 6.NOV.2024 13:35:12

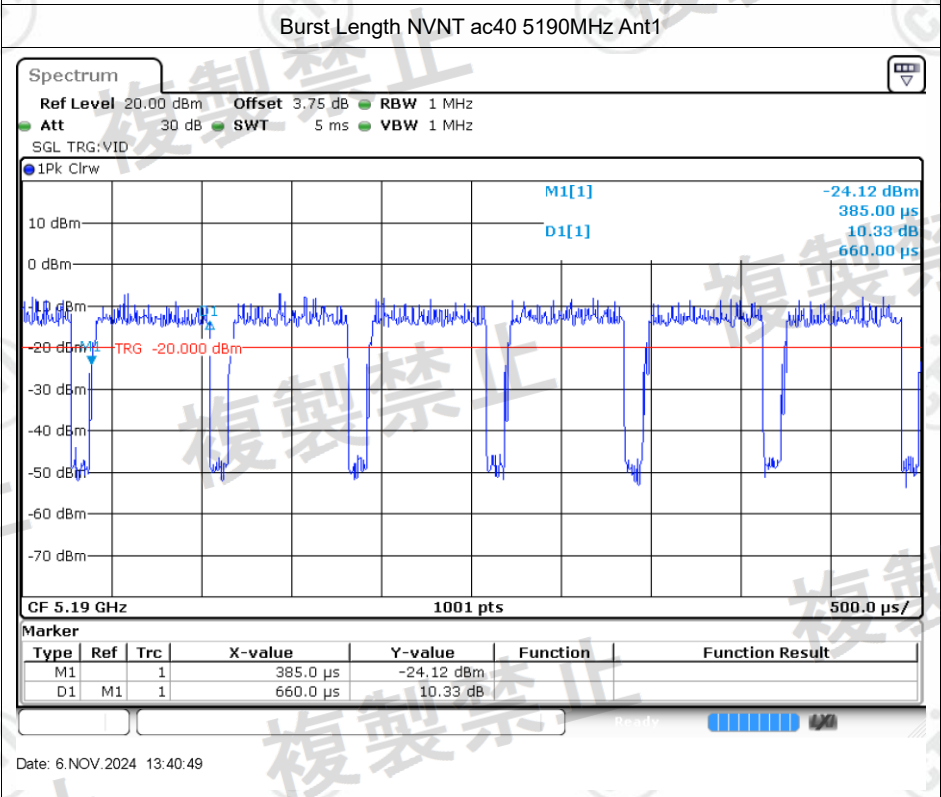
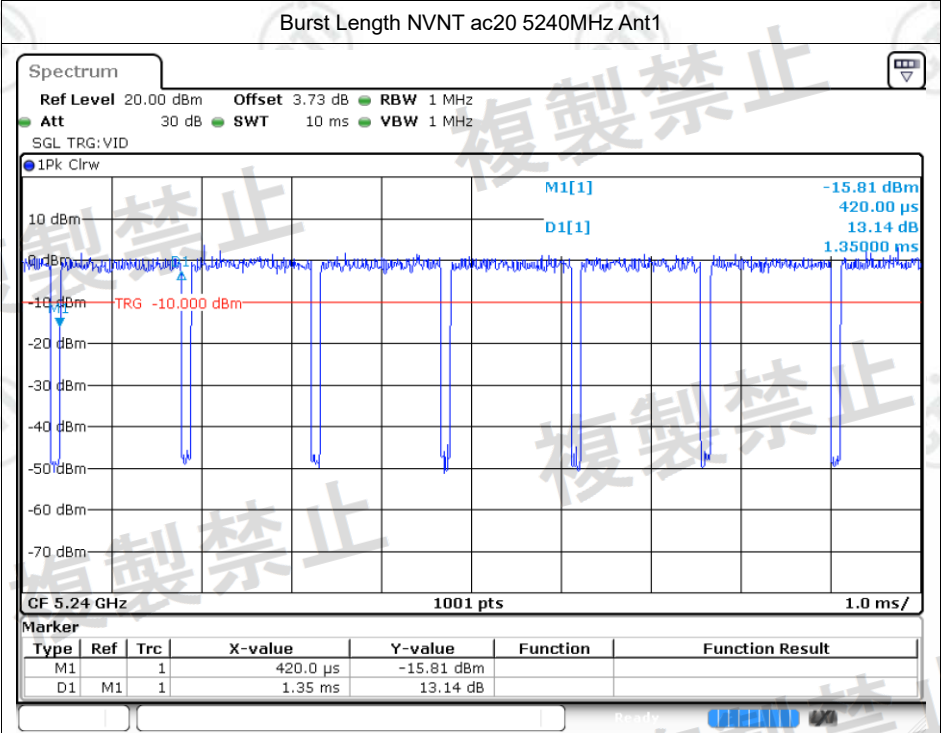


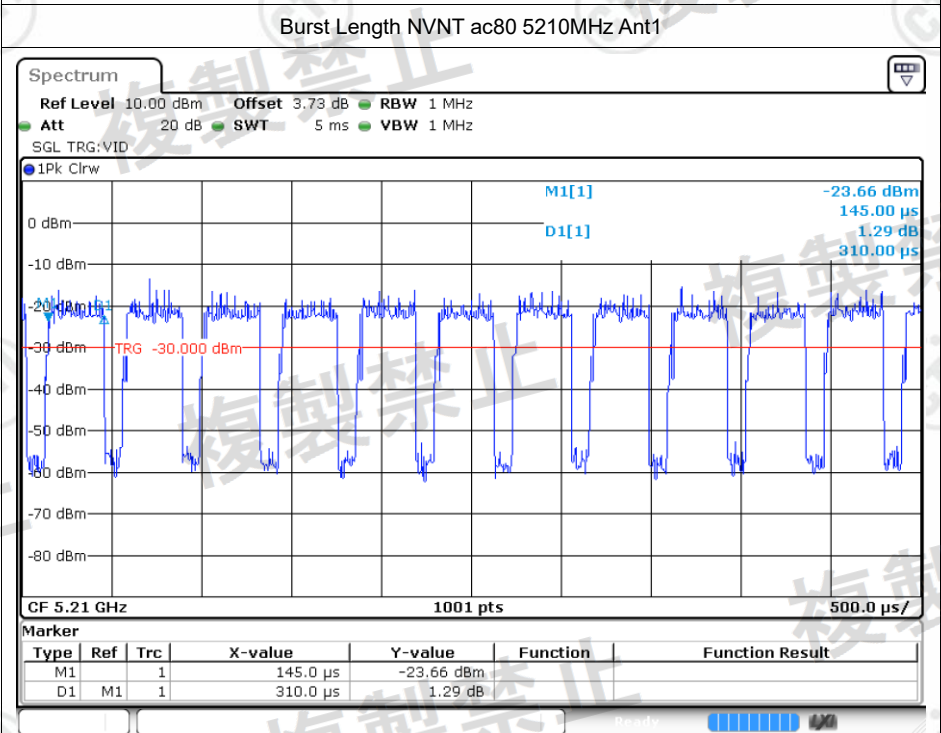
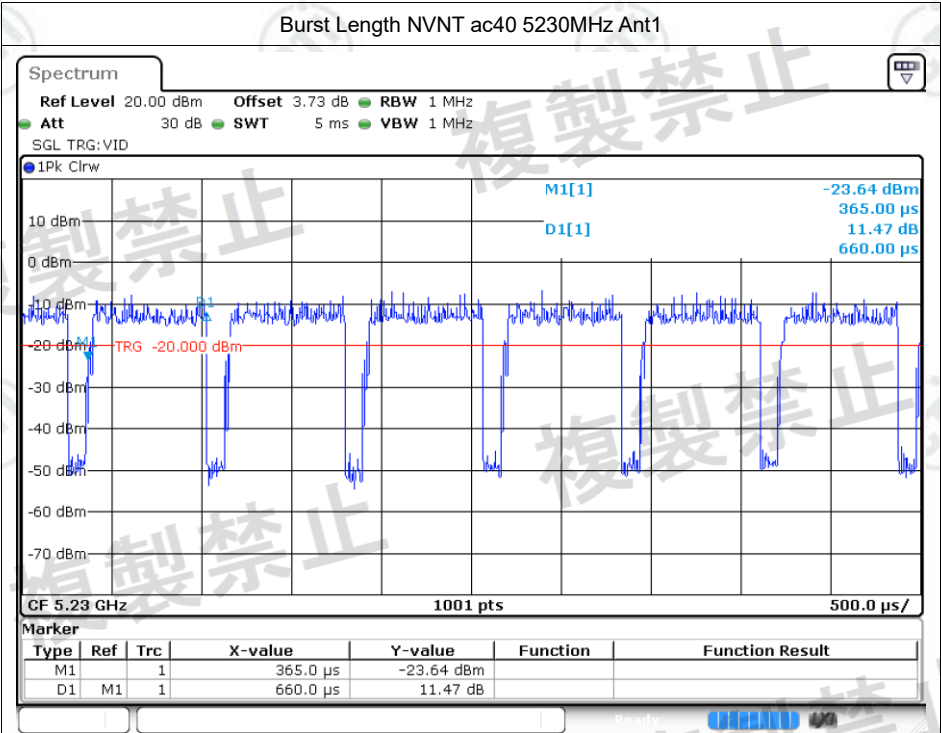




Adjacent Channel Emitted Power



Condition	Mode	Frequency (MHz)	Antenna	Offset (MHz)	Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5180	Ant1	-20	-33.51	-25	Pass
NVNT	a	5180	Ant1	-40	-44.03	-40	Pass
NVNT	a	5180	Ant1	20	-33.19	-25	Pass
NVNT	a	5180	Ant1	40	-44.03	-40	Pass
NVNT	a	5200	Ant1	-20	-33.94	-25	Pass
NVNT	a	5200	Ant1	-40	-44.3	-40	Pass
NVNT	a	5200	Ant1	20	-33.37	-25	Pass
NVNT	a	5200	Ant1	40	-44.32	-40	Pass
NVNT	a	5240	Ant1	-20	-33.12	-25	Pass
NVNT	a	5240	Ant1	-40	-44.34	-40	Pass
NVNT	a	5240	Ant1	20	-32.71	-25	Pass
NVNT	a	5240	Ant1	40	-44.25	-40	Pass
NVNT	n20	5180	Ant1	-20	-32.99	-25	Pass
NVNT	n20	5180	Ant1	-40	-43.56	-40	Pass
NVNT	n20	5180	Ant1	20	-31.14	-25	Pass
NVNT	n20	5180	Ant1	40	-43.47	-40	Pass
NVNT	n20	5200	Ant1	-20	-32.48	-25	Pass
NVNT	n20	5200	Ant1	-40	-43.5	-40	Pass
NVNT	n20	5200	Ant1	20	-31.75	-25	Pass
NVNT	n20	5200	Ant1	40	-43.46	-40	Pass
NVNT	n20	5240	Ant1	-20	-31.97	-25	Pass
NVNT	n20	5240	Ant1	-40	-44.18	-40	Pass
NVNT	n20	5240	Ant1	20	-31.87	-25	Pass
NVNT	n20	5240	Ant1	40	-44.09	-40	Pass
NVNT	n40	5190	Ant1	-40	-42.05	-25	Pass
NVNT	n40	5190	Ant1	-80	-46.12	-40	Pass
NVNT	n40	5190	Ant1	40	-40.34	-25	Pass
NVNT	n40	5190	Ant1	80	-46.18	-40	Pass
NVNT	n40	5230	Ant1	-40	-40.9	-25	Pass
NVNT	n40	5230	Ant1	-80	-46.35	-40	Pass
NVNT	n40	5230	Ant1	40	-40.14	-25	Pass
NVNT	n40	5230	Ant1	80	-45.95	-40	Pass
NVNT	ac20	5180	Ant1	-20	-32.96	-25	Pass
NVNT	ac20	5180	Ant1	-40	-44.03	-40	Pass
NVNT	ac20	5180	Ant1	20	-31	-25	Pass
NVNT	ac20	5180	Ant1	40	-44.15	-40	Pass
NVNT	ac20	5200	Ant1	-20	-33.13	-25	Pass
NVNT	ac20	5200	Ant1	-40	-43.89	-40	Pass



NVNT	ac20	5200	Ant1	20	-31.41	-25	Pass
NVNT	ac20	5200	Ant1	40	-43.78	-40	Pass
NVNT	ac20	5240	Ant1	-20	-32.42	-25	Pass
NVNT	ac20	5240	Ant1	-40	-44.07	-40	Pass
NVNT	ac20	5240	Ant1	20	-31.81	-25	Pass
NVNT	ac20	5240	Ant1	40	-44.05	-40	Pass
NVNT	ac40	5190	Ant1	-40	-42.17	-25	Pass
NVNT	ac40	5190	Ant1	-80	-46.14	-40	Pass
NVNT	ac40	5190	Ant1	40	-40.19	-25	Pass
NVNT	ac40	5190	Ant1	80	-45.95	-40	Pass
NVNT	ac40	5230	Ant1	-40	-41.29	-25	Pass
NVNT	ac40	5230	Ant1	-80	-46.66	-40	Pass
NVNT	ac40	5230	Ant1	40	-39.78	-25	Pass
NVNT	ac40	5230	Ant1	80	-46.21	-40	Pass
NVNT	ac80	5210	Ant1	-80	-39.73	-25	Pass
NVNT	ac80	5210	Ant1	-160	-41.43	-40	Pass
NVNT	ac80	5210	Ant1	80	-38.37	-25	Pass
NVNT	ac80	5210	Ant1	160	-41.2	-40	Pass

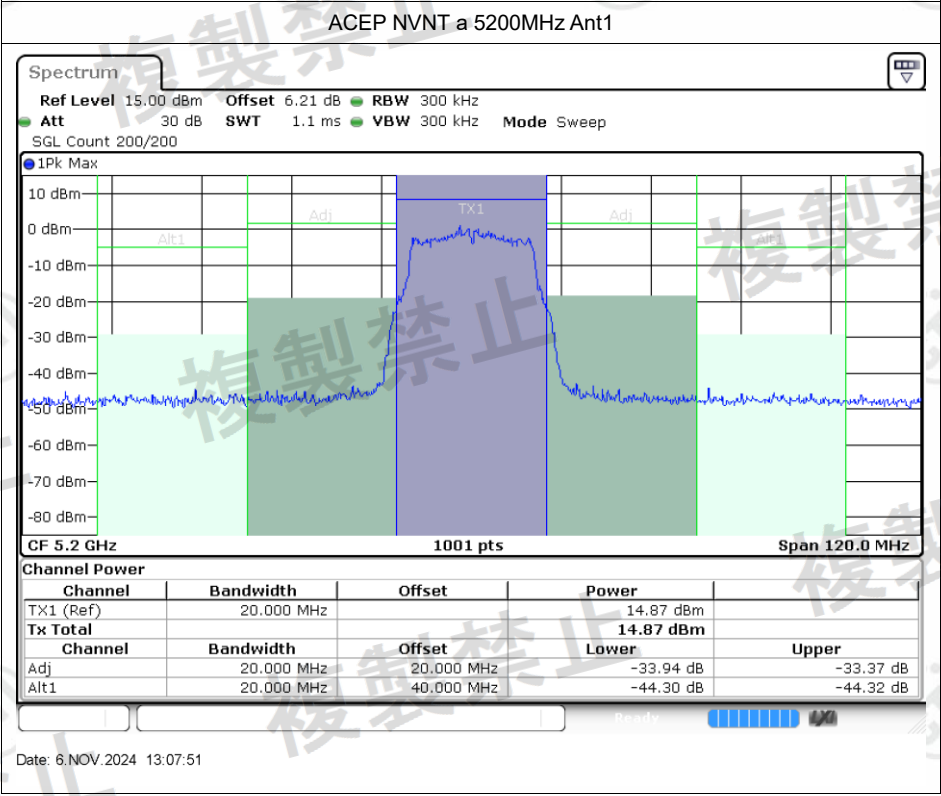
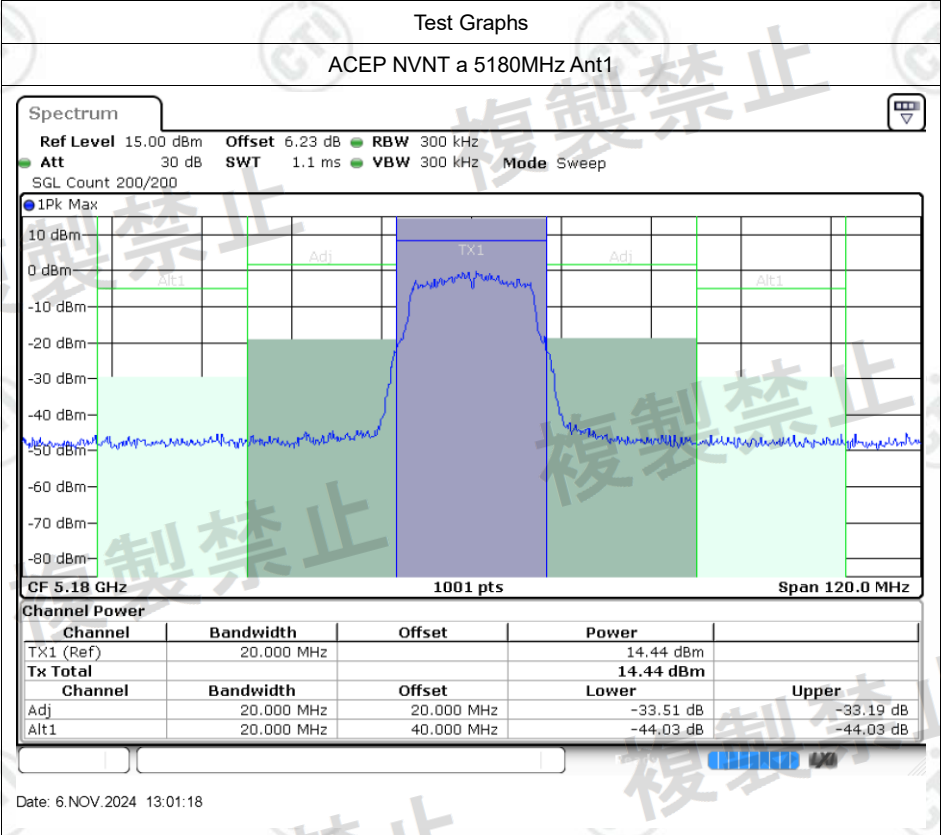


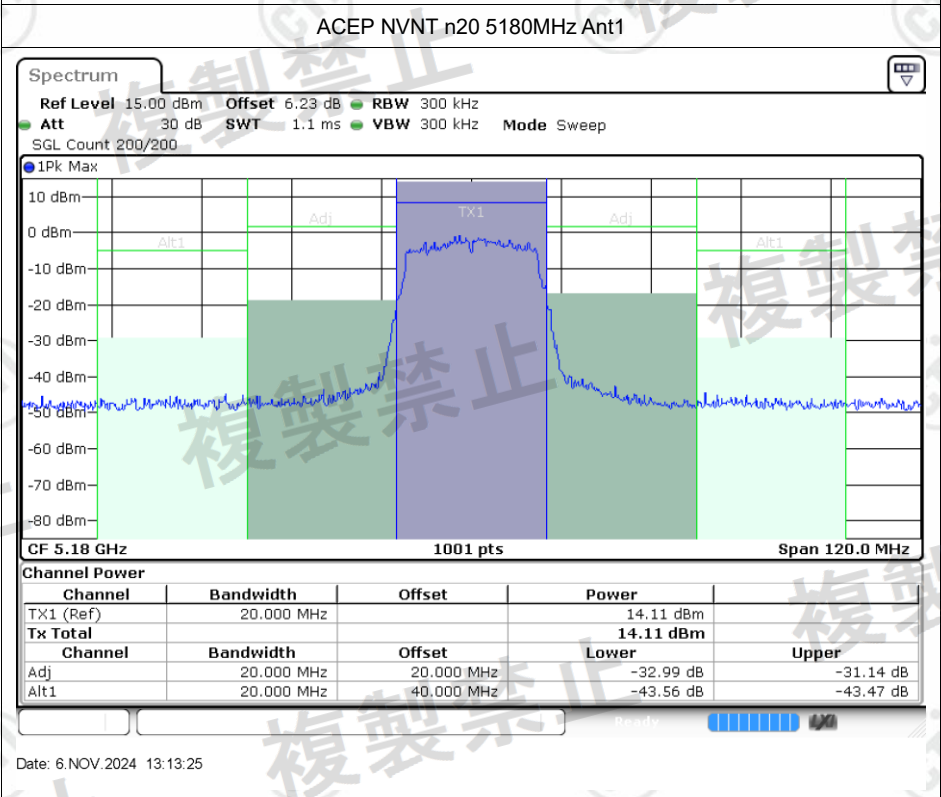
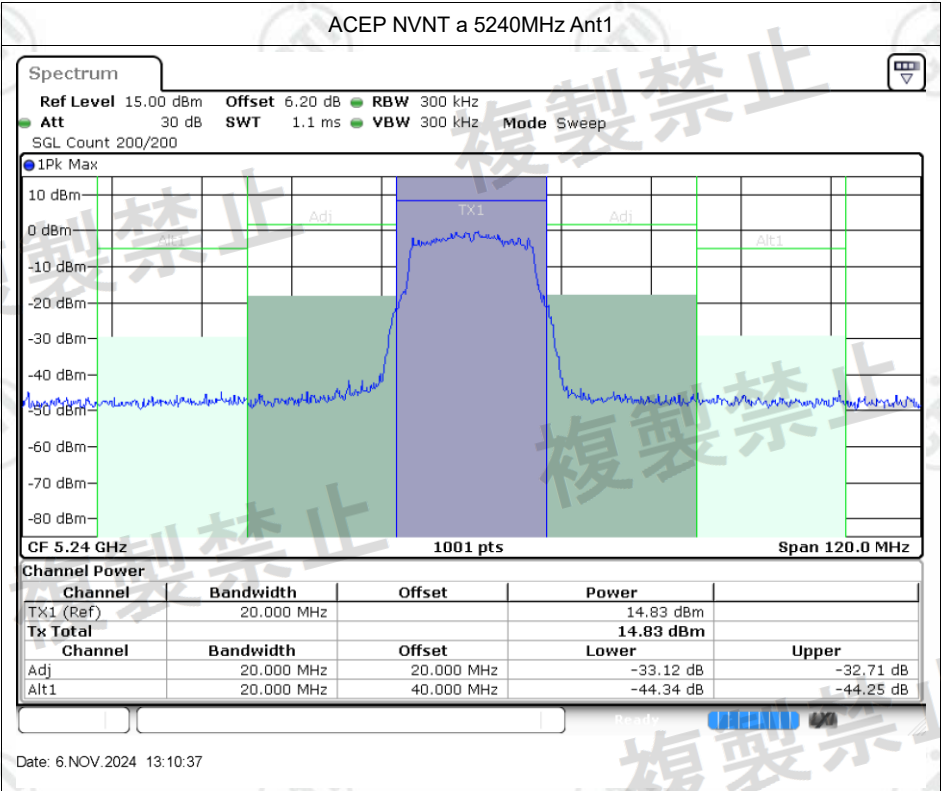


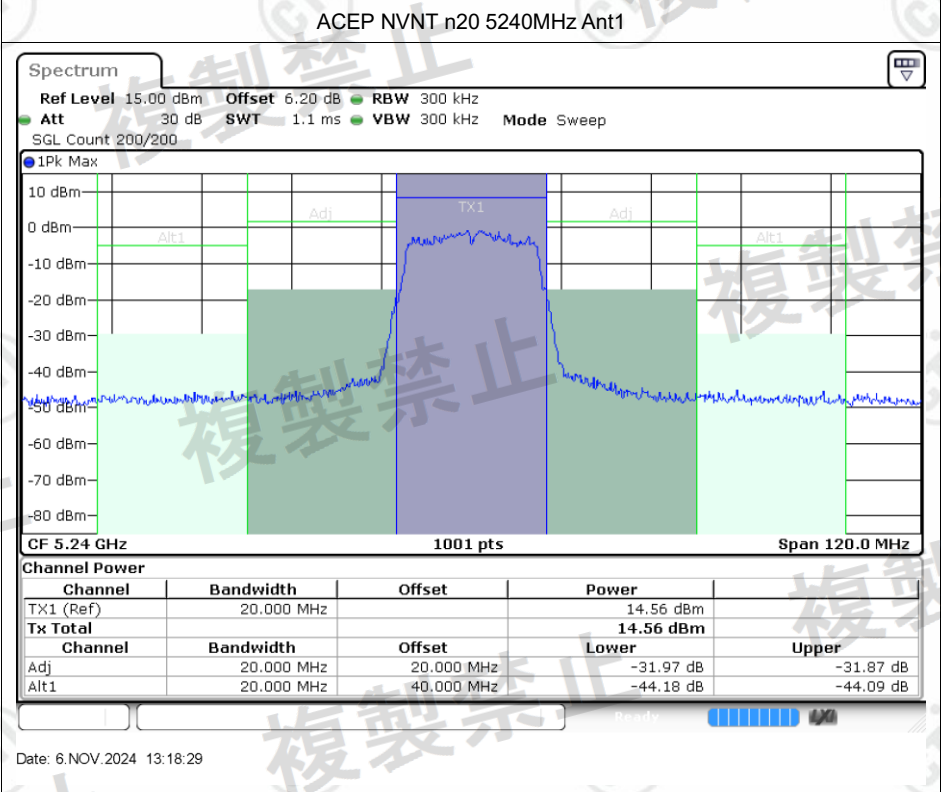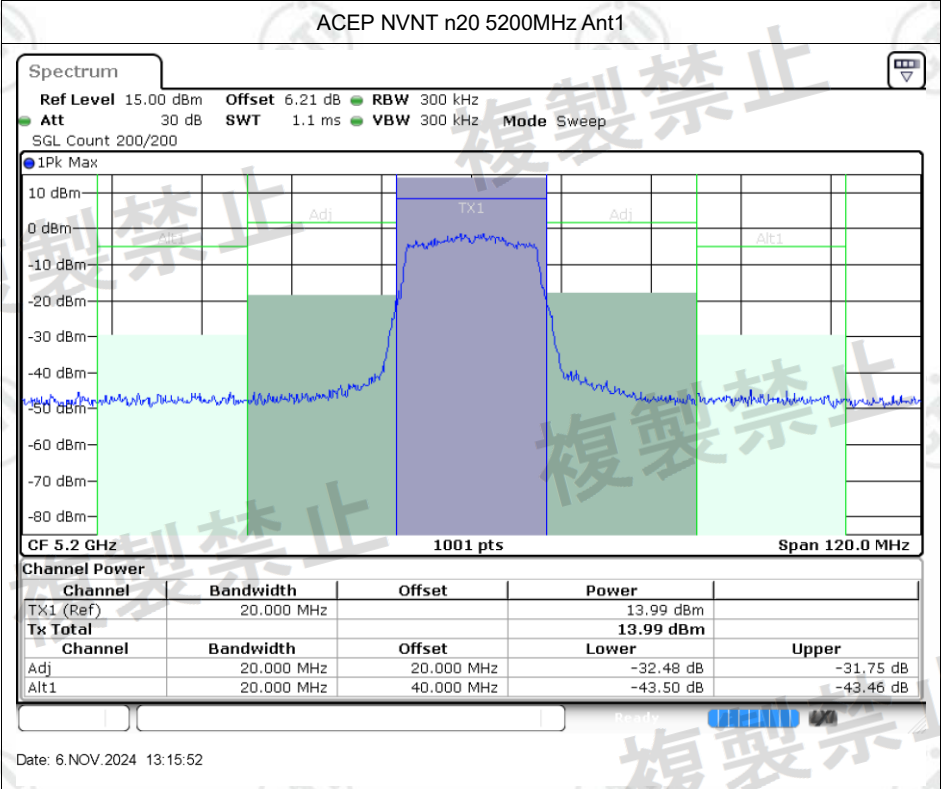

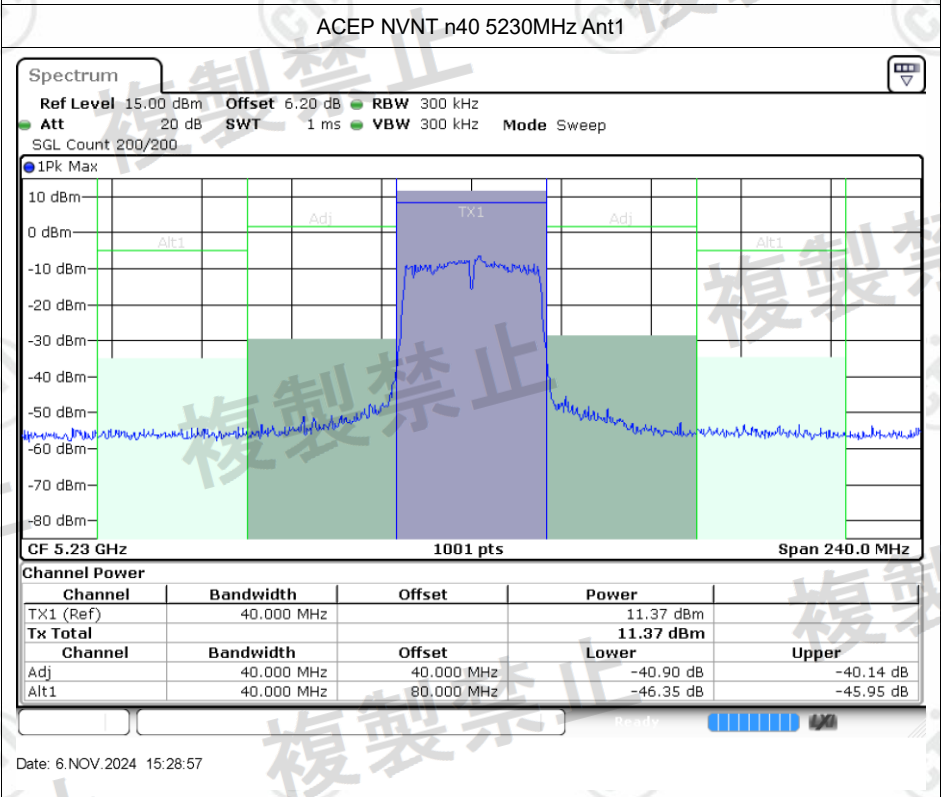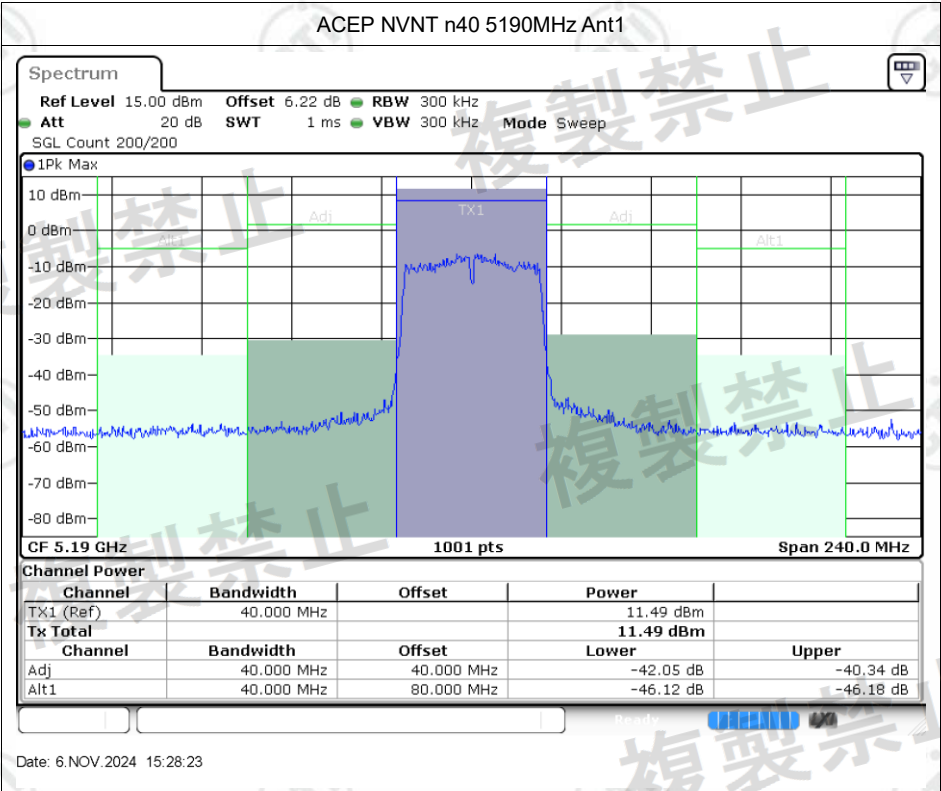

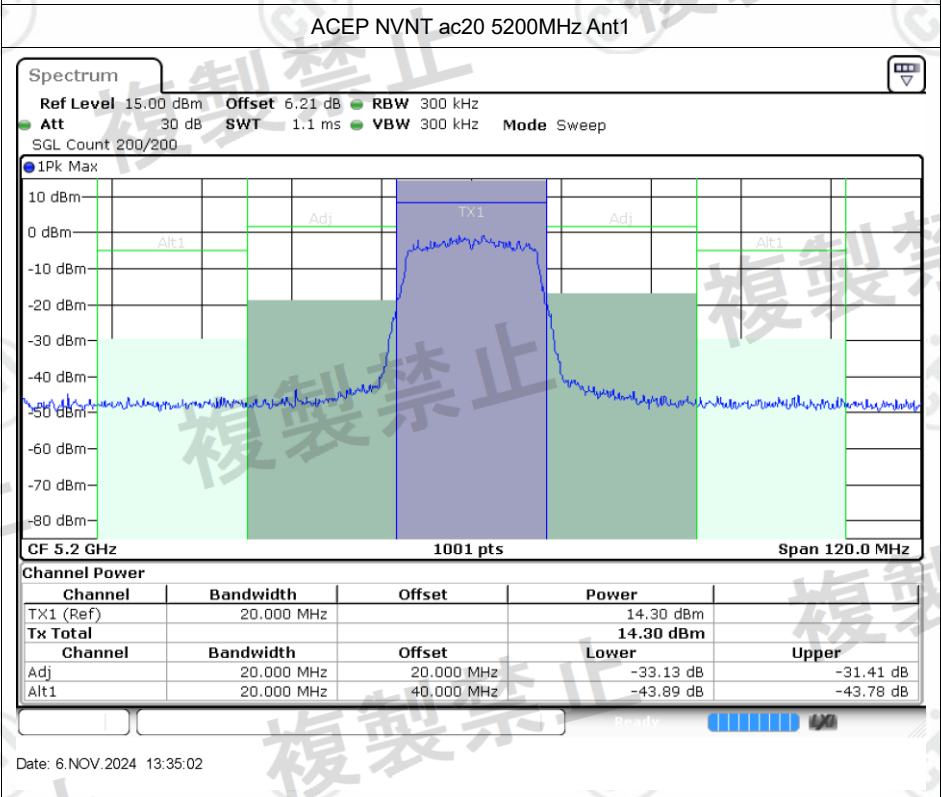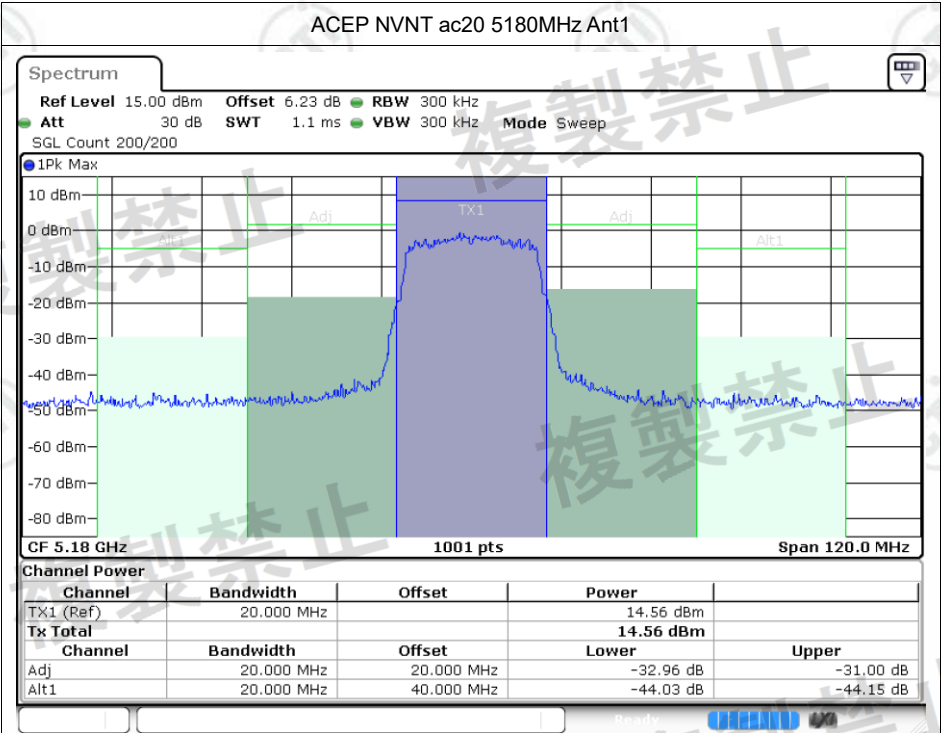

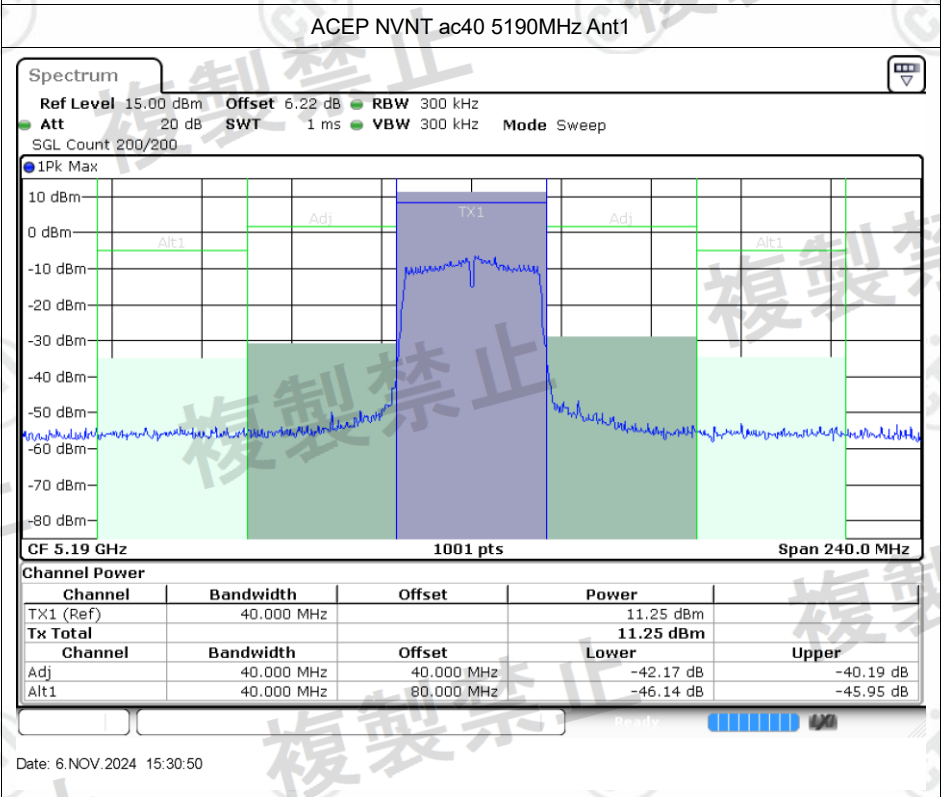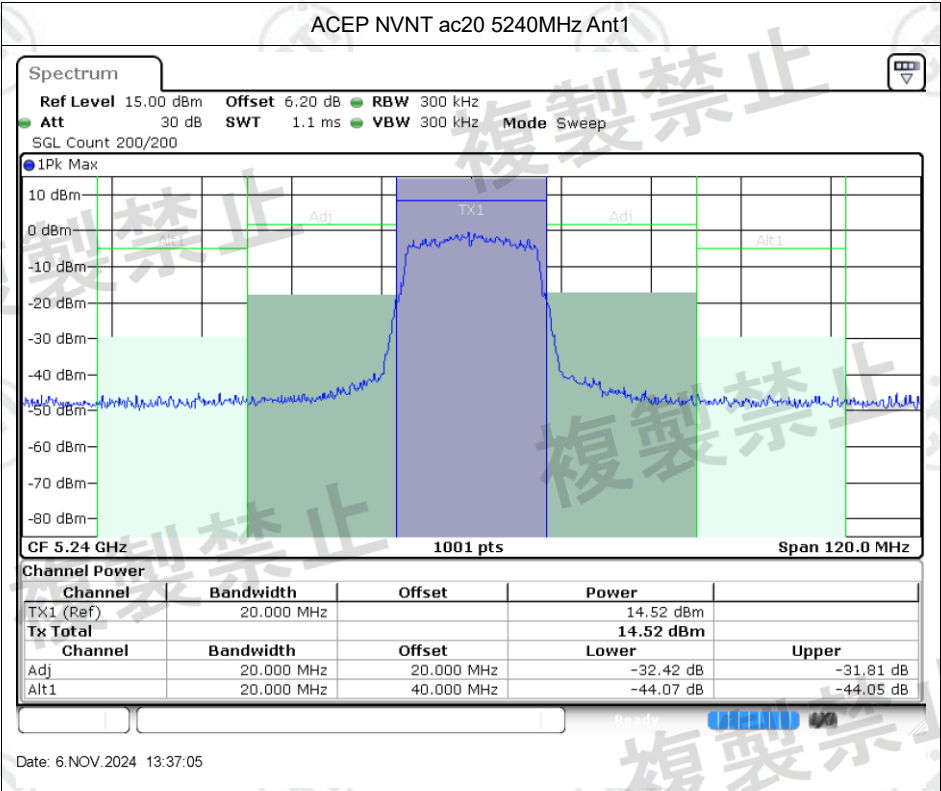


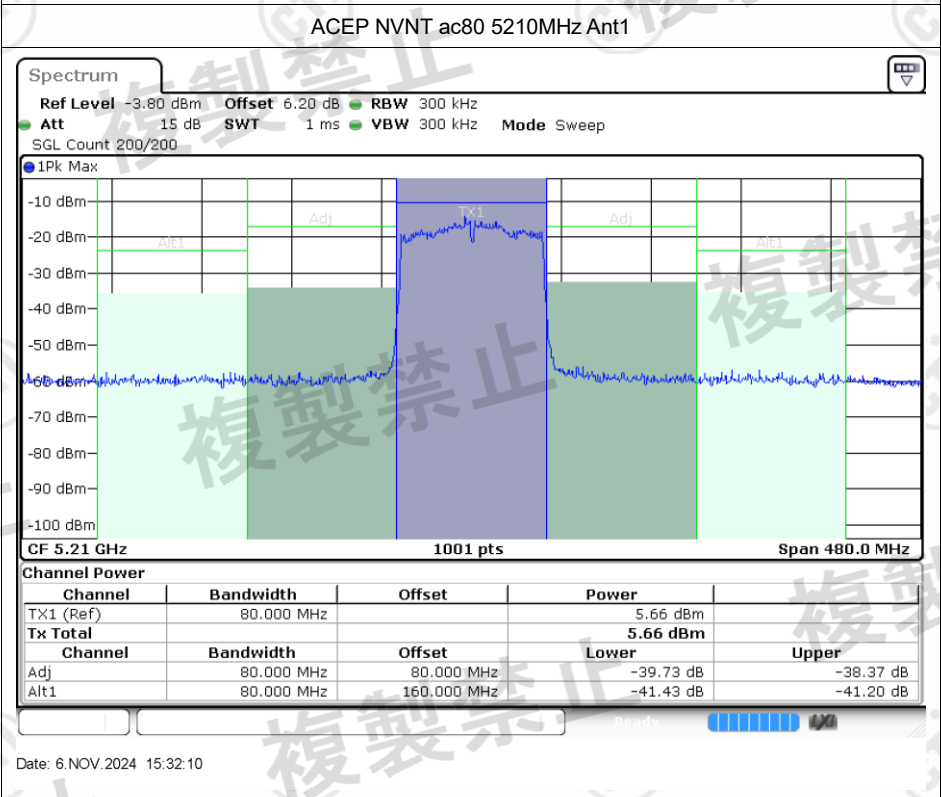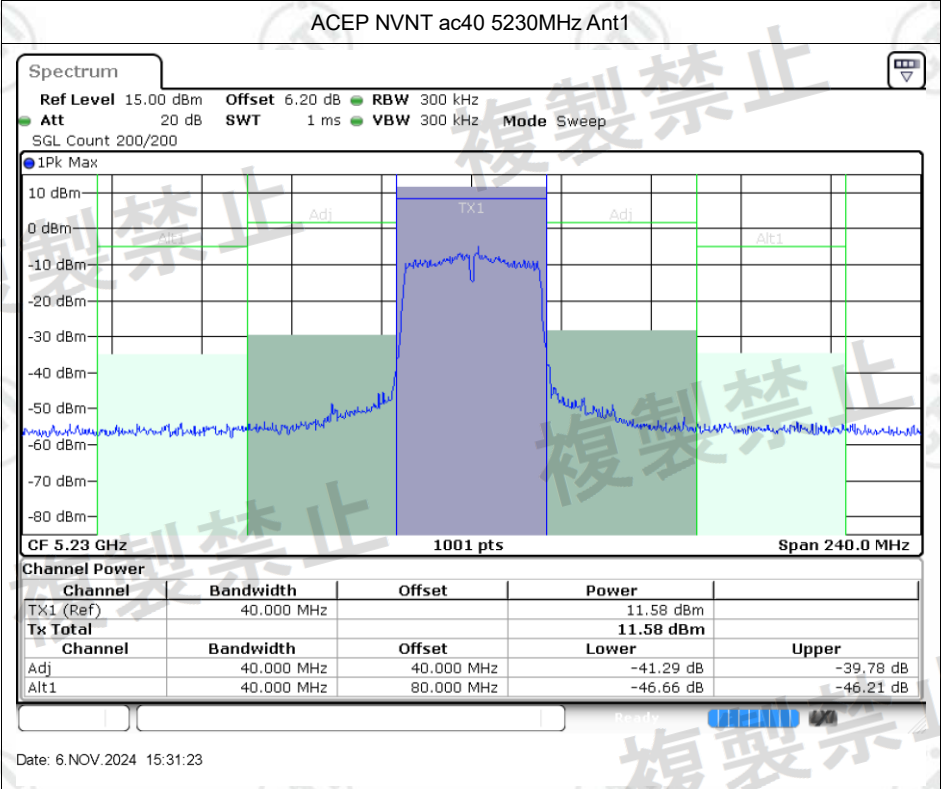


Carrier Sense

Condition	Mode	Frequency (MHz)	Antenna	CW Level (dBm)	Verdict
NVNT	a	5180	Ant1	-49.03	Pass
NVNT	n40	5190	Ant1	-49.04	Pass
NVNT	ac80	5210	Ant1	-49.08	Pass

Note: All model was test, only the worst case was recorded for each bandwidth.

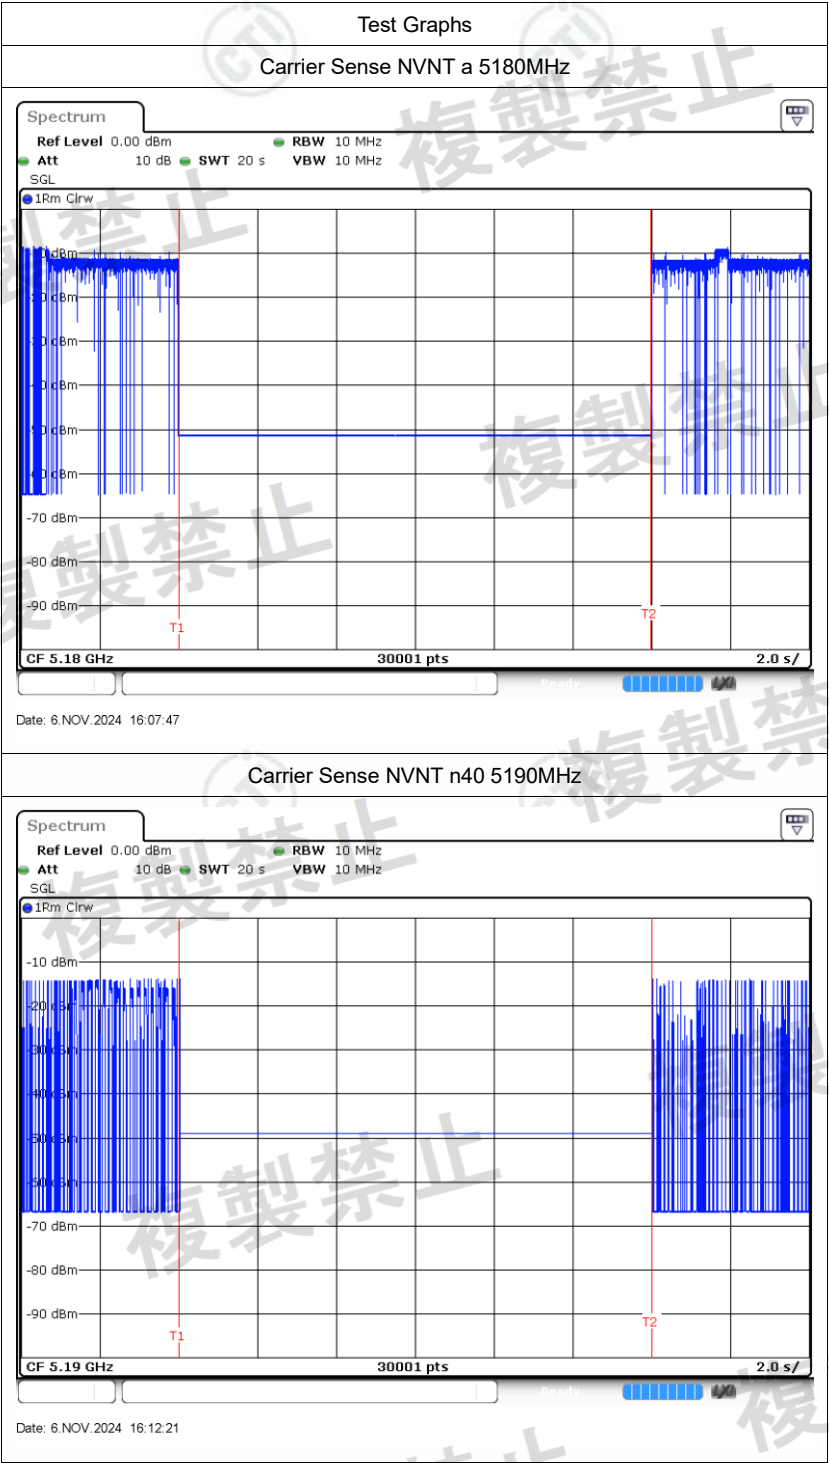

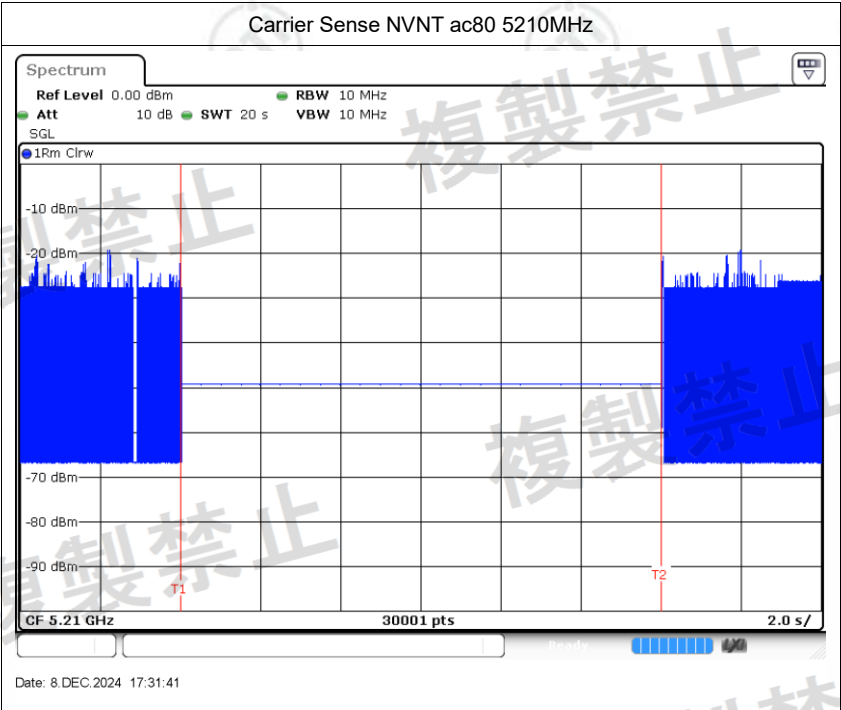

Remark: The T1 is interference on; T2 is interference off.


Spurious Emission of TX


TestCondition	TestMode	Antenna	Frequency[MHz]	Freq.Range [MHz]	Result [MHz]	Result [dBm/MHz]	Result [μW/MHz]	Limit [μW/MHz]	Verdict
NTNV	11A	Ant1	5180	30~5142	5139.96	-49.94	0.01791	≤2.5	PASS
NTNV	11A	Ant1	5180	5142~5150	5146.74	-46.26	0.04178	≤15	PASS
NTNV	11A	Ant1	5180	5250~5251	5250.78	-49.83	0.01837	≤166.0	PASS
NTNV	11A	Ant1	5180	5251~5260	5255.22	-51.62	0.01216	≤42.2	PASS
NTNV	11A	Ant1	5180	5260~5266.7	5263.87	-51.45	0.01265	≤15.8	PASS
NTNV	11A	Ant1	5180	5266.7~26000	25572.20	-50.46	0.01589	≤2.5	PASS
NTNV	11A	Ant1	5200	30~5142	3466.80	-51.02	0.01396	≤2.5	PASS
NTNV	11A	Ant1	5200	5142~5150	5147.97	-49.30	0.02075	≤15	PASS
NTNV	11A	Ant1	5200	5250~5251	5250.11	-47.98	0.02812	≤776.2	PASS
NTNV	11A	Ant1	5200	5251~5260	5253.75	-47.34	0.03258	≤57.0	PASS
NTNV	11A	Ant1	5200	5260~5266.7	5262.85	-49.65	0.01914	≤15.8	PASS
NTNV	11A	Ant1	5200	5266.7~26000	25920.52	-49.84	0.01832	≤2.5	PASS
NTNV	11A	Ant1	5240	30~5142	5100.08	-52.19	0.01067	≤2.5	PASS
NTNV	11A	Ant1	5240	5142~5150	5146.11	-54.73	0.00594	≤15	PASS
NTNV	11A	Ant1	5240	5250~5251	5250.01	-13.58	77.44618	≤977.2	PASS
NTNV	11A	Ant1	5240	5251~5260	5251.10	-23.25	8.35603	≤98.0	PASS
NTNV	11A	Ant1	5240	5260~5266.7	5262.99	-43.98	0.07063	≤15.8	PASS
NTNV	11A	Ant1	5240	5266.7~26000	5269.46	-49.13	0.02158	≤2.5	PASS
NTNV	11N20SI SO	Ant1	5180	30~5142	5142.00	-51.14	0.01358	≤2.5	PASS
NTNV	11N20SI SO	Ant1	5180	5142~5150	5149.56	-47.98	0.02812	≤15	PASS
NTNV	11N20SI SO	Ant1	5180	5250~5251	5250.60	-53.88	0.00723	≤251.2	PASS
NTNV	11N20SI SO	Ant1	5180	5251~5260	5251.50	-53.36	0.00815	≤90.3	PASS
NTNV	11N20SI SO	Ant1	5180	5260~5266.7	5265.49	-54.41	0.00640	≤15.7	PASS
NTNV	11N20SI SO	Ant1	5180	5266.7~26000	25921.90	-51.28	0.01315	≤2.5	PASS
NTNV	11N20SI SO	Ant1	5200	30~5142	3790.90	-53.71	0.00752	≤2.5	PASS


NTNV	11N20SI SO	Ant1	5200	5142~5150	5146.38	-51.91	0.01138	≤15	PASS
NTNV	11N20SI SO	Ant1	5200	5250~5251	5250.07	-50.65	0.01521	≤851.1	PASS
NTNV	11N20SI SO	Ant1	5200	5251~5260	5251.48	-50.33	0.01637	≤90.6	PASS
NTNV	11N20SI SO	Ant1	5200	5260~5266.7	5261.21	-52.29	0.01042	≤15.8	PASS
NTNV	11N20SI SO	Ant1	5200	5266.7~26000	25658.5 9	-51.05	0.01387	≤2.5	PASS
NTNV	11N20SI SO	Ant1	5240	30~5142	3812.37	-54.14	0.00681	≤2.5	PASS
NTNV	11N20SI SO	Ant1	5240	5142~5150	5143.46	-53.36	0.00815	≤15	PASS
NTNV	11N20SI SO	Ant1	5240	5250~5251	5250.26	-11.60	122.179 97	≤549.5	PASS
NTNV	11N20SI SO	Ant1	5240	5251~5260	5251.04	-23.75	7.44732	≤99.2	PASS
NTNV	11N20SI SO	Ant1	5240	5260~5266.7	5260.42	-42.64	0.09616	≤15.8	PASS
NTNV	11N20SI SO	Ant1	5240	5266.7~26000	5273.61	-49.92	0.01799	≤2.5	PASS
NTNV	11N40SI SO	Ant1	5190	30~5141.6	5139.56	-52.47	0.01000	≤2.5	PASS
NTNV	11N40SI SO	Ant1	5190	5141.6~5150	5148.62	-49.94	0.01791	≤15	PASS
NTNV	11N40SI SO	Ant1	5190	5250~5251	5250.28	-52.02	0.01109	≤262.4	PASS
NTNV	11N40SI SO	Ant1	5190	5251~5270	5269.24	-52.83	0.00920	≤8.5	PASS
NTNV	11N40SI SO	Ant1	5190	5270~5278.4	5274.02	-53.63	0.00766	≤4.5	PASS
NTNV	11N40SI SO	Ant1	5190	5278.4~26000	24048.7 2	-51.20	0.01340	≤2.5	PASS
NTNV	11N40SI SO	Ant1	5230	30~5141.6	3800.83	-54.21	0.00670	≤2.5	PASS
NTNV	11N40SI SO	Ant1	5230	5141.6~5150	5147.34	-53.75	0.00745	≤15	PASS
NTNV	11N40SI SO	Ant1	5230	5250~5251	5250.07	-24.94	5.66239	≤425.6	PASS
NTNV	11N40SI	Ant1	5230	5251~5270	5251.00	-37.11	0.34356	≤50	PASS


	SO								
NTNV	11N40SI SO	Ant1	5230	5270~5278.4	5271.76	-49.79	0.01854	≤6.2	PASS
NTNV	11N40SI SO	Ant1	5230	5278.4~26000	25193.2 4	-51.21	0.01337	≤2.5	PASS
NTNV	11AC20S ISO	Ant1	5180	30~5142	3799.59	-53.10	0.00865	≤2.5	PASS
NTNV	11AC20S ISO	Ant1	5180	5142~5150	5143.58	-49.06	0.02193	≤15	PASS
NTNV	11AC20S ISO	Ant1	5180	5250~5251	5250.25	-52.61	0.00968	≤562.3	PASS
NTNV	11AC20S ISO	Ant1	5180	5251~5260	5253.66	-53.14	0.00857	≤58.0	PASS
NTNV	11AC20S ISO	Ant1	5180	5260~5266.7	5264.53	-54.00	0.00703	≤15.8	PASS
NTNV	11AC20S ISO	Ant1	5180	5266.7~26000	25384.9 1	-50.55	0.01556	≤2.5	PASS
NTNV	11AC20S ISO	Ant1	5200	30~5142	3756.65	-54.04	0.00697	≤2.5	PASS
NTNV	11AC20S ISO	Ant1	5200	5142~5150	5148.89	-51.12	0.01365	≤15	PASS
NTNV	11AC20S ISO	Ant1	5200	5250~5251	5250.76	-50.45	0.01592	≤173.8	PASS
NTNV	11AC20S ISO	Ant1	5200	5251~5260	5253.49	-50.96	0.01416	≤60.1	PASS
NTNV	11AC20S ISO	Ant1	5200	5260~5266.7	5263.06	-51.12	0.01365	≤15.8	PASS
NTNV	11AC20S ISO	Ant1	5200	5266.7~26000	23527.2 1	-50.43	0.01600	≤2.5	PASS
NTNV	11AC20S ISO	Ant1	5240	30~5142	3493.89	-54.49	0.00628	≤2.5	PASS
NTNV	11AC20S ISO	Ant1	5240	5142~5150	5147.91	-54.57	0.00617	≤15	PASS
NTNV	11AC20S ISO	Ant1	5240	5250~5251	5250.14	-9.91	180.301 77	≤724.4	PASS
NTNV	11AC20S ISO	Ant1	5240	5251~5260	5251.33	-21.95	11.2719 7	≤93.5	PASS
NTNV	11AC20S ISO	Ant1	5240	5260~5266.7	5260.66	-40.99	0.14060	≤15.8	PASS
NTNV	11AC20S ISO	Ant1	5240	5266.7~26000	5294.34	-49.18	0.02133	≤2.5	PASS


NTNV	11AC40S ISO	Ant1	5190	30~5141.6	3460.39	-52.12	0.01084	≤2.5	PASS
NTNV	11AC40S ISO	Ant1	5190	5141.6~5150	5145.35	-51.32	0.01303	≤15	PASS
NTNV	11AC40S ISO	Ant1	5190	5250~5251	5250.22	-53.30	0.00826	≤301.3	PASS
NTNV	11AC40S ISO	Ant1	5190	5251~5270	5251.06	-52.96	0.00893	≤49.7	PASS
NTNV	11AC40S ISO	Ant1	5190	5270~5278.4	5278.25	-53.32	0.00822	≤2.5	PASS
NTNV	11AC40S ISO	Ant1	5190	5278.4~26000	25526.1 7	-50.32	0.01641	≤2.5	PASS
NTNV	11AC40S ISO	Ant1	5230	30~5141.6	4753.12	-54.18	0.00675	≤2.5	PASS
NTNV	11AC40S ISO	Ant1	5230	5141.6~5150	5142.41	-52.84	0.00918	≤15	PASS
NTNV	11AC40S ISO	Ant1	5230	5250~5251	5250.10	-28.48	2.50611	≤397.2	PASS
NTNV	11AC40S ISO	Ant1	5230	5251~5270	5251.32	-37.80	0.29309	≤48.5	PASS
NTNV	11AC40S ISO	Ant1	5230	5270~5278.4	5275.57	-49.40	0.02028	≤3.7	PASS
NTNV	11AC40S ISO	Ant1	5230	5278.4~26000	25950.2 7	-51.31	0.01306	≤2.5	PASS
NTNV	11AC80S ISO	Ant1	5210	30~5123.2	3794.89	-53.88	0.00723	≤2.5	PASS
NTNV	11AC80S ISO	Ant1	5210	5132.5~5150	5148.02	-55.06	0.00551	≤15	PASS
NTNV	11AC80S ISO	Ant1	5210	5250~5251	5250.00	-33.37	0.81283	≤250.0	PASS
NTNV	11AC80S ISO	Ant1	5210	5251~5290	5251.16	-43.41	0.08054	≤24.8	PASS
NTNV	11AC80S ISO	Ant1	5210	5290~5296.7	5291.88	-56.11	0.00433	≤3.5	PASS
NTNV	11AC80S ISO	Ant1	5210	5296.7~26000	25939.9 6	-51.44	0.01268	≤2.5	PASS

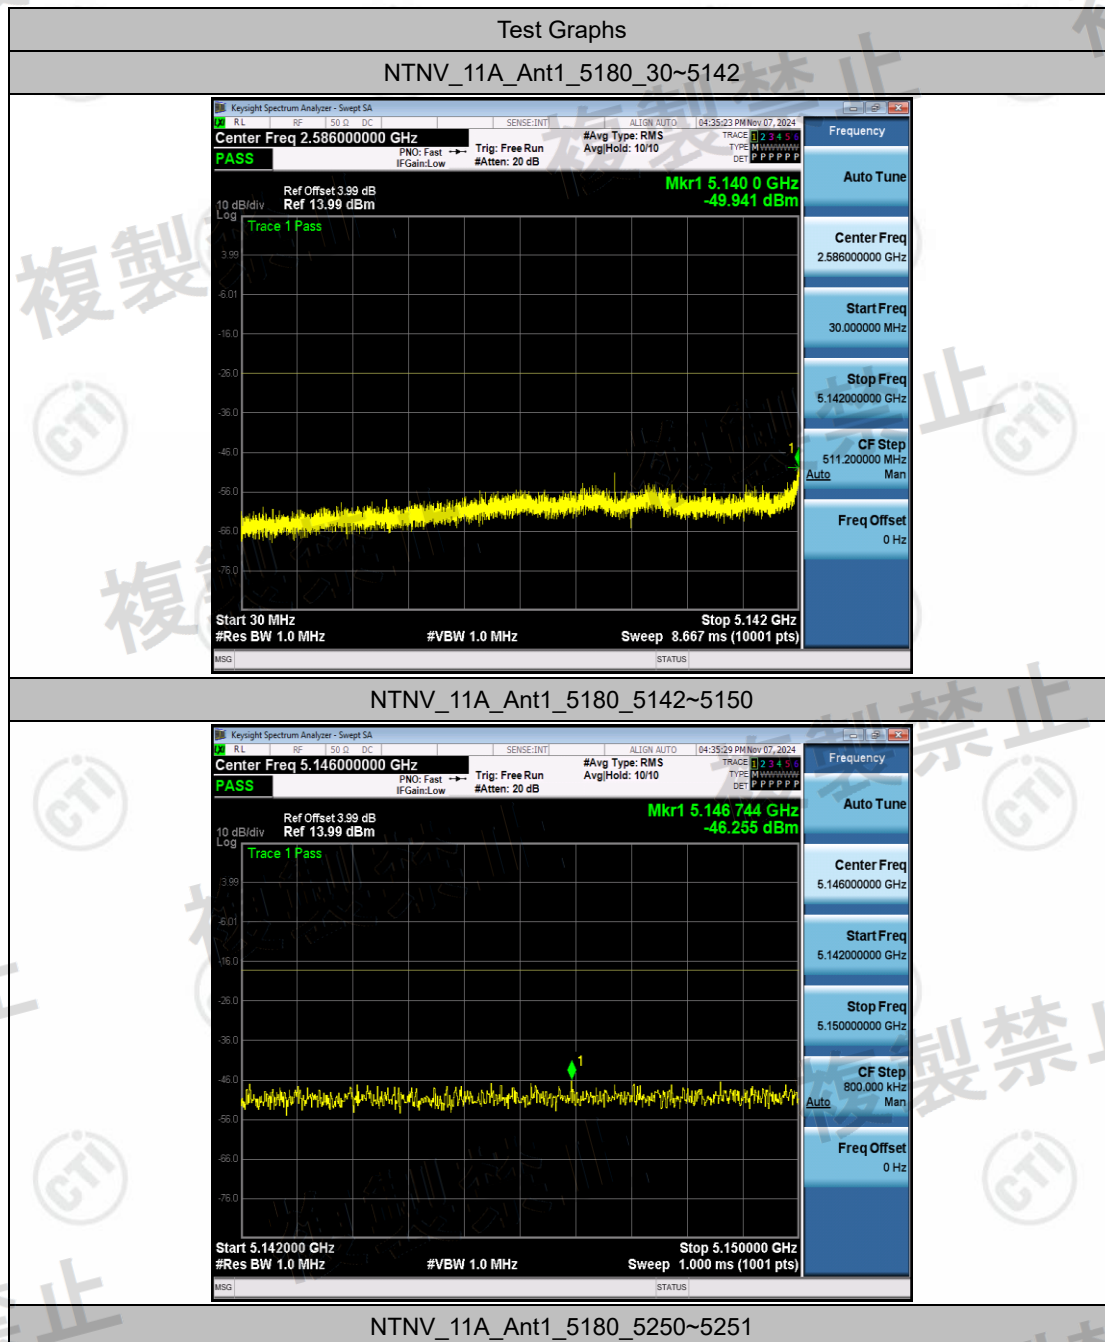


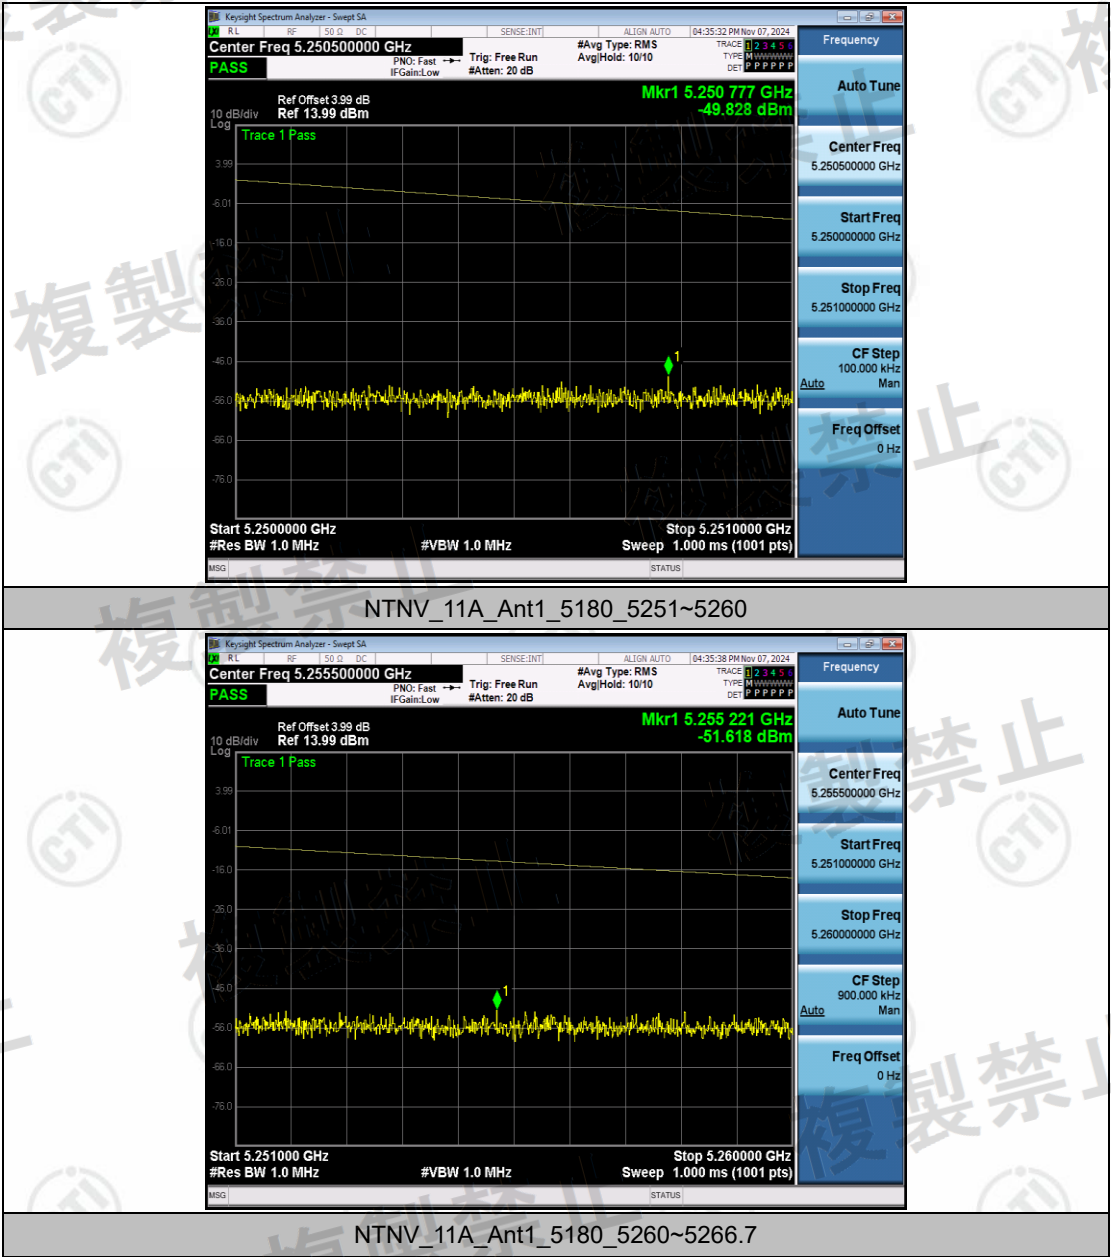


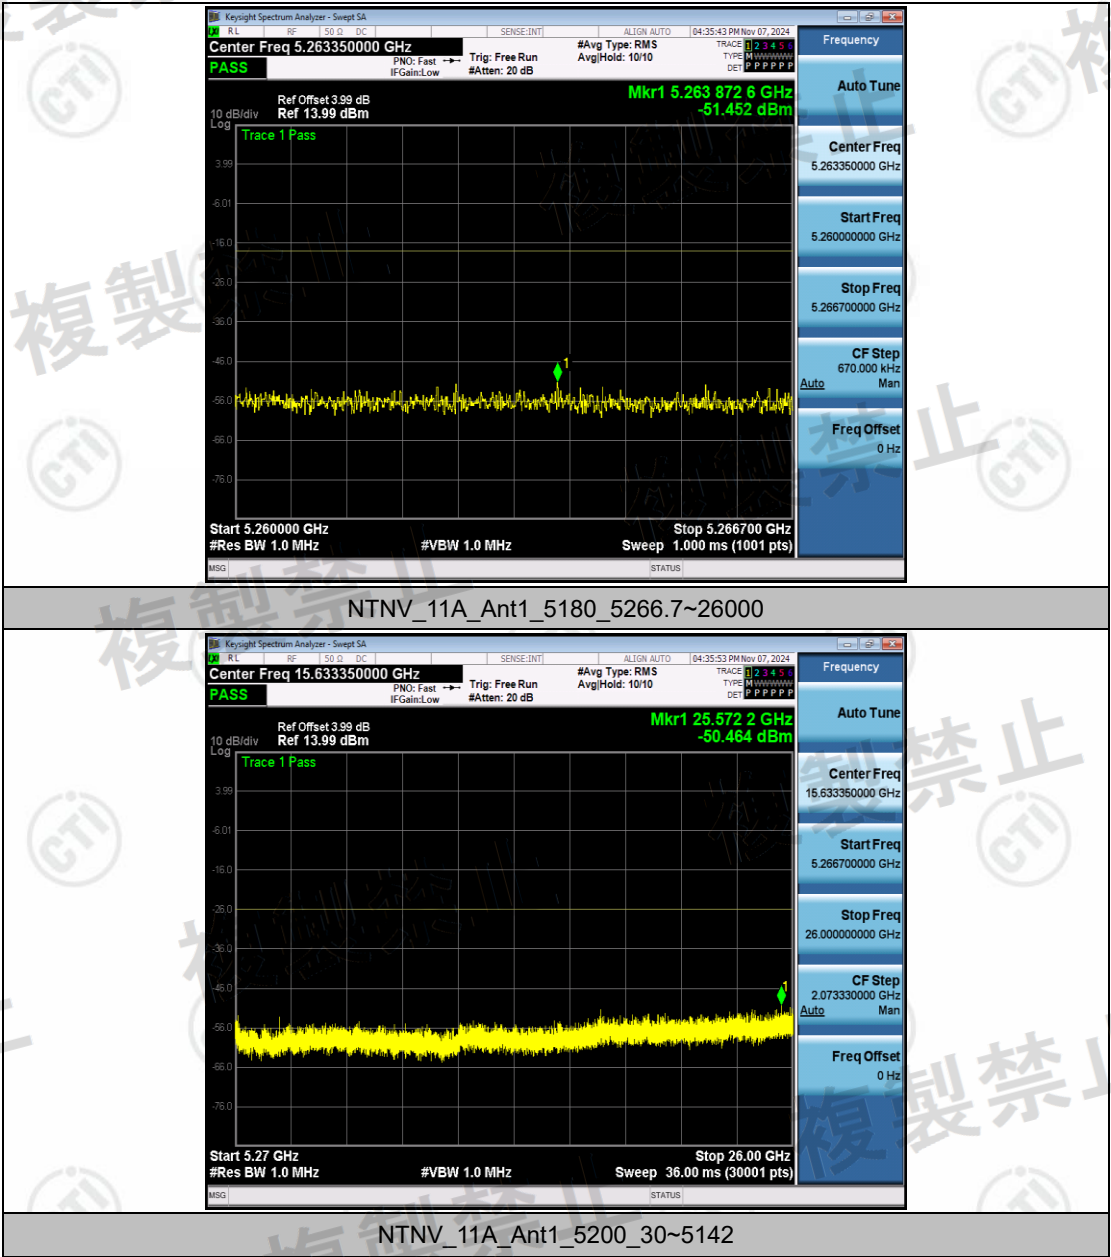


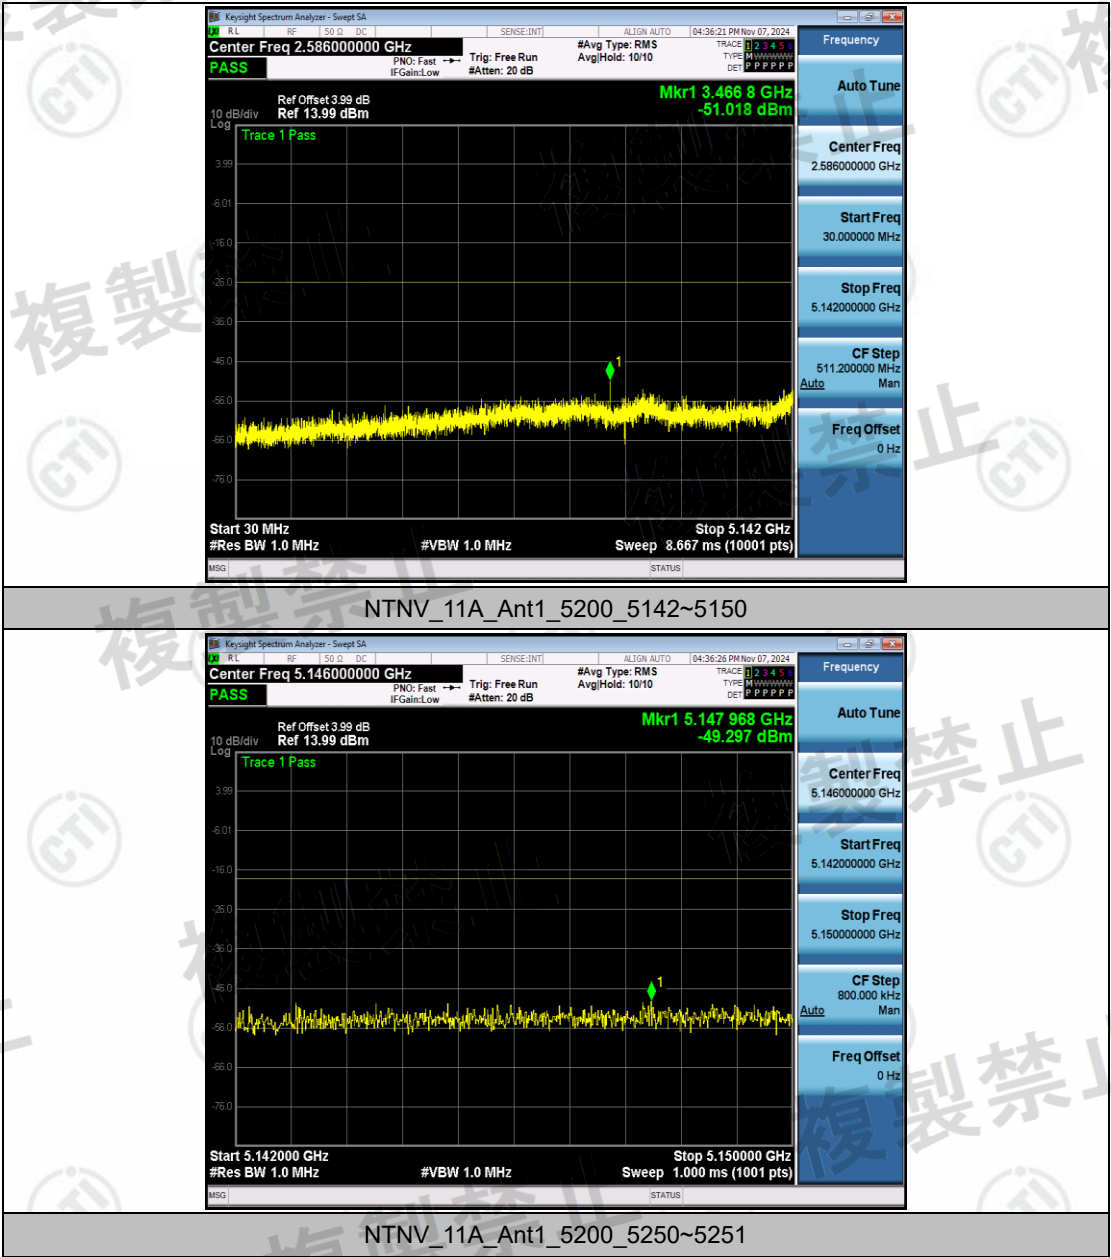


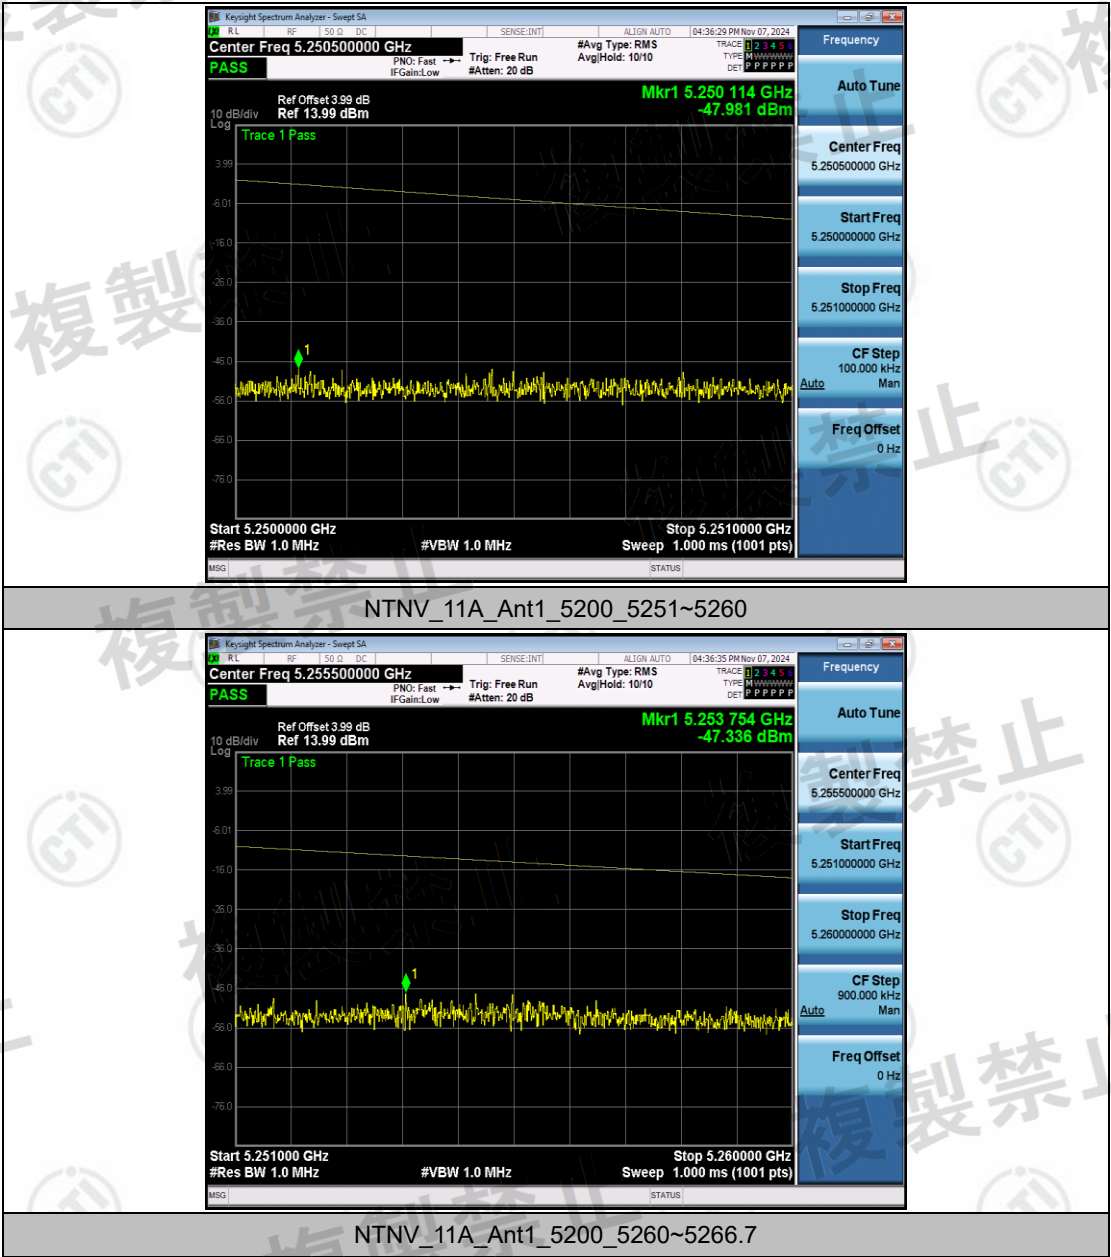


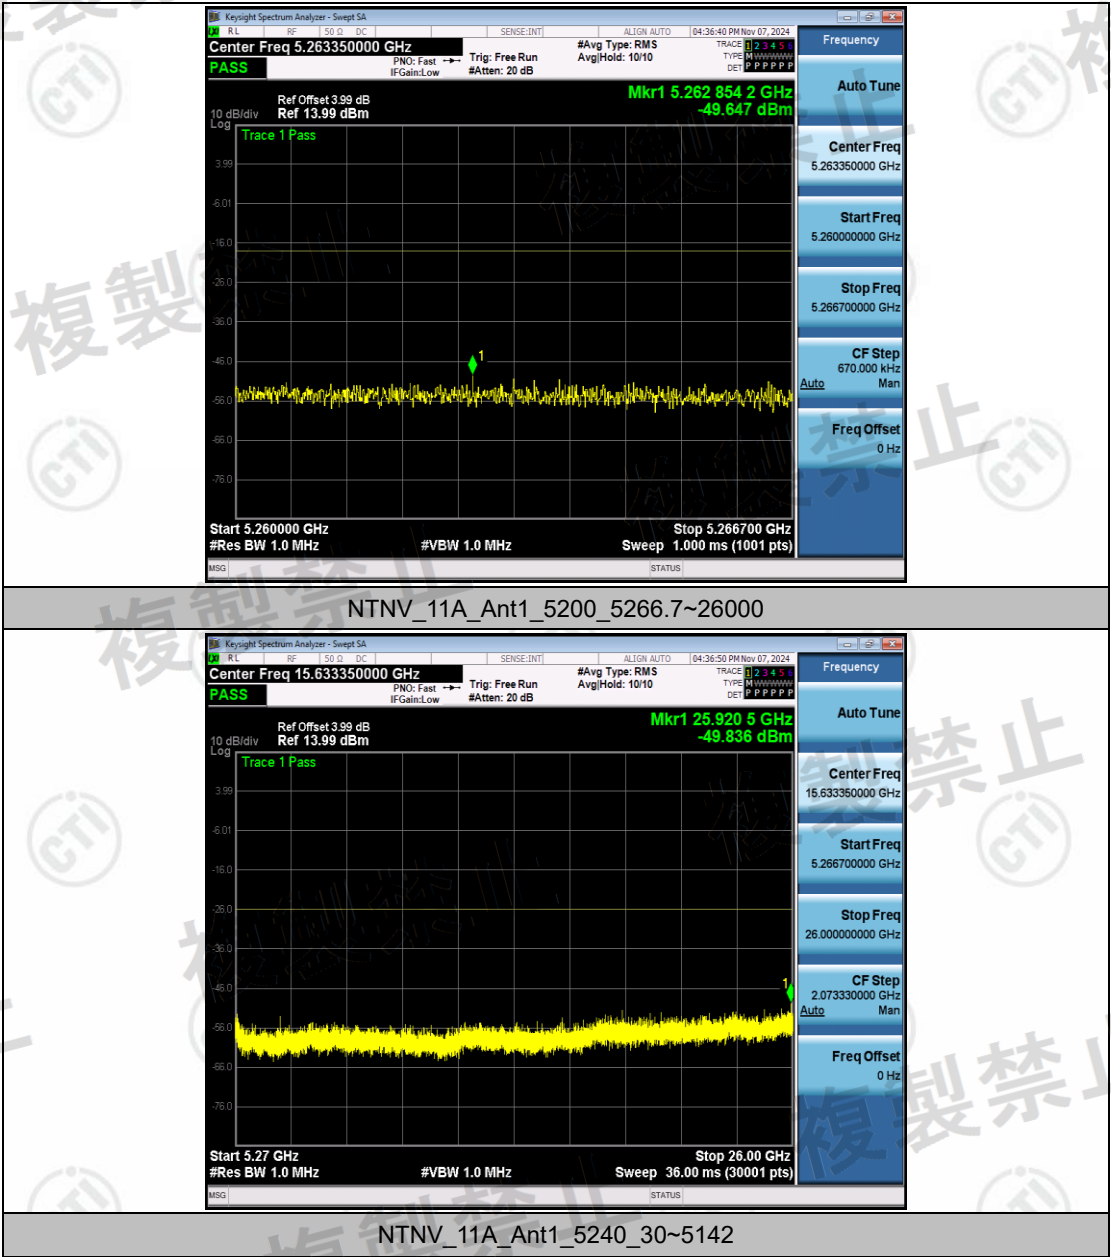


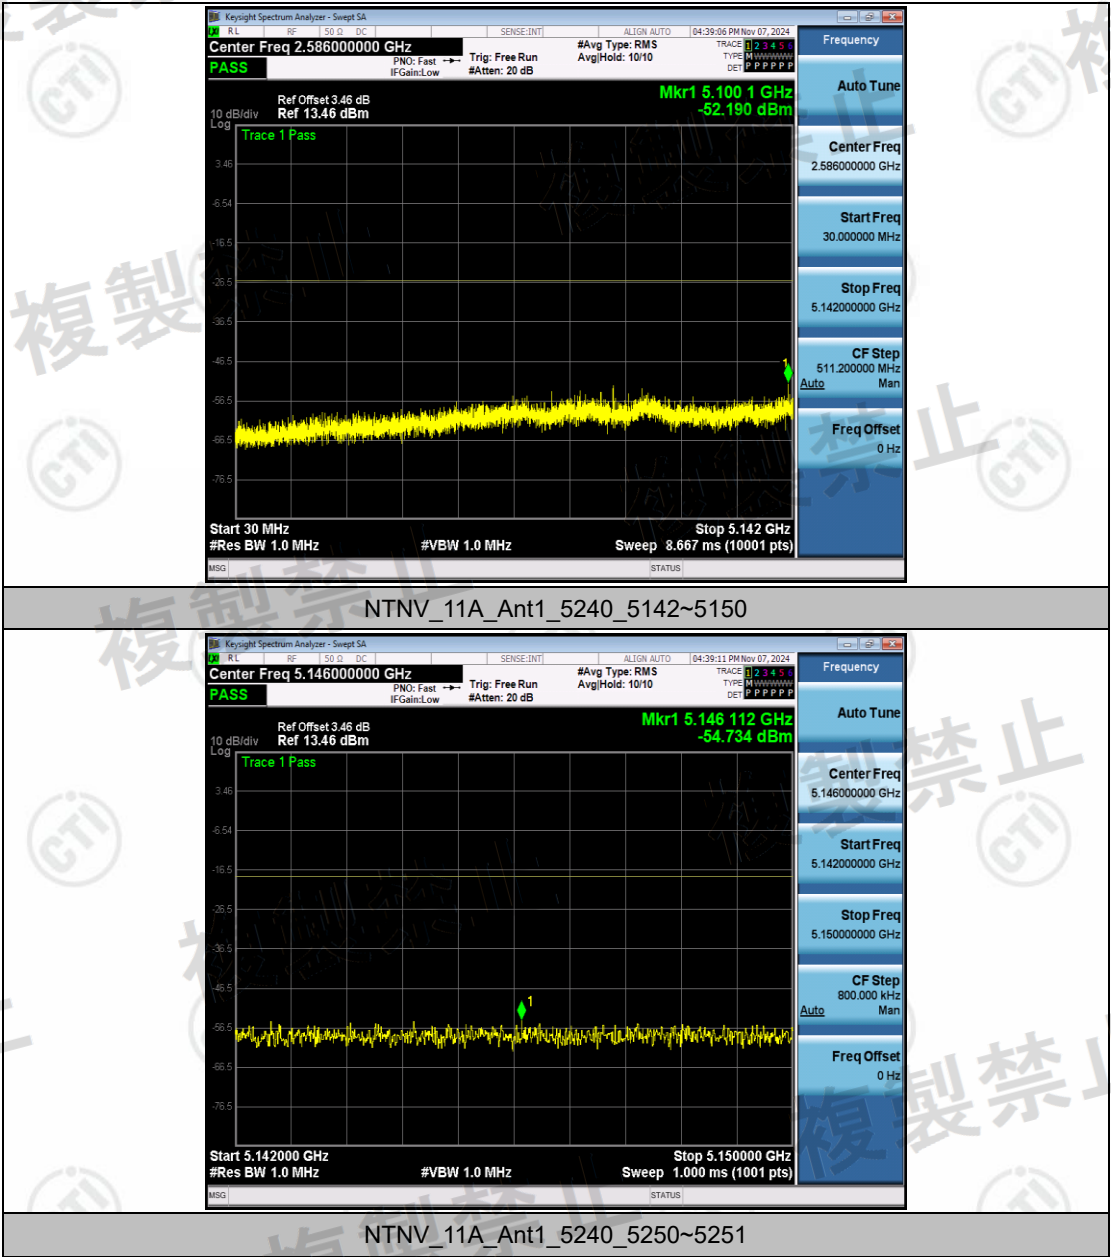


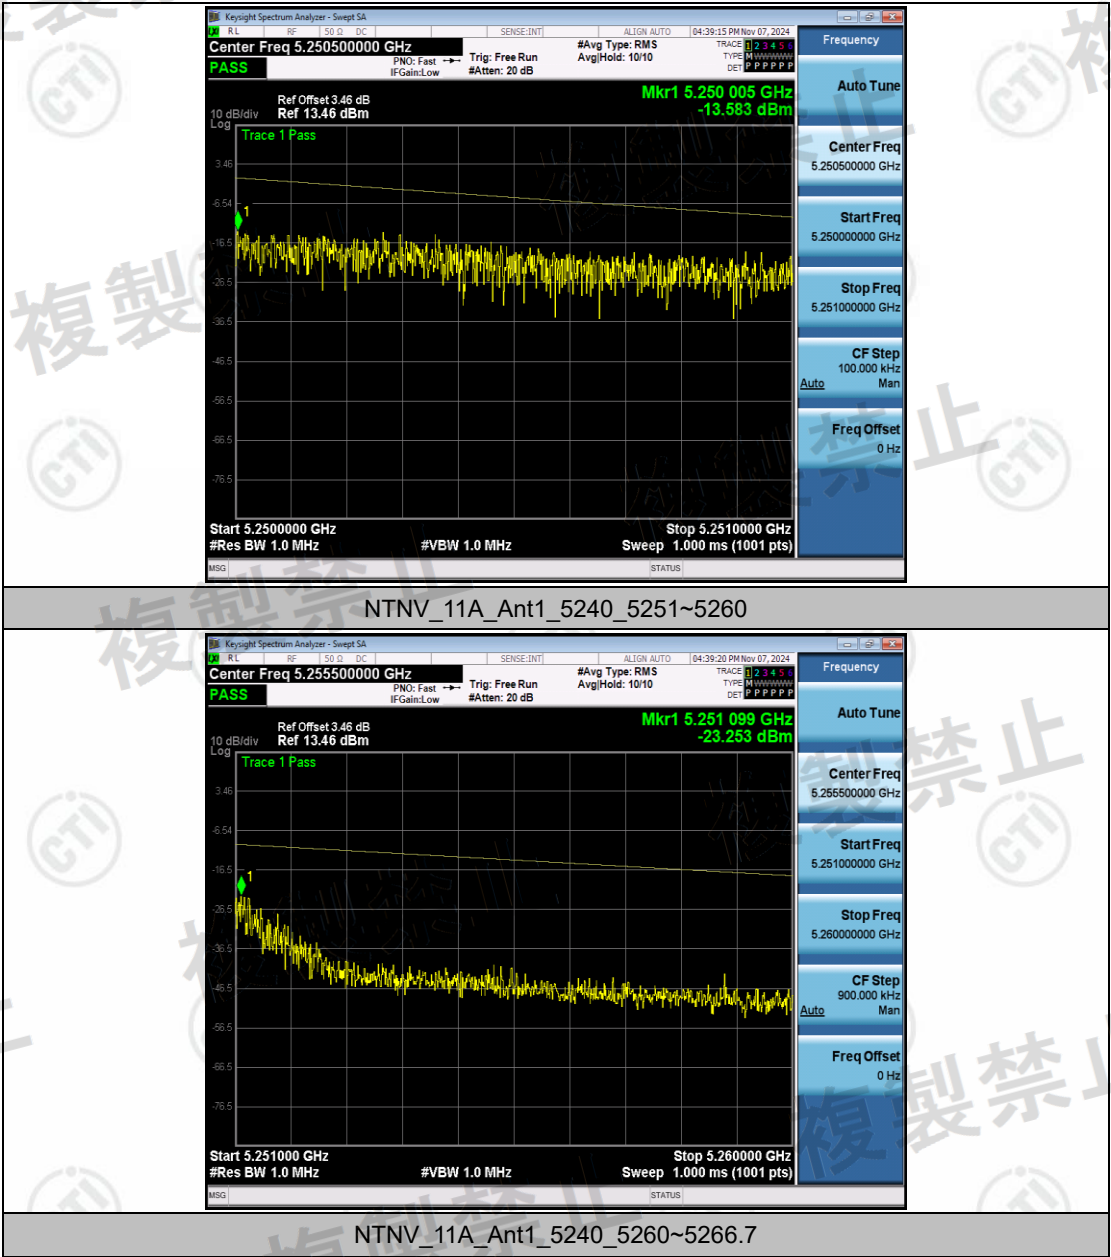


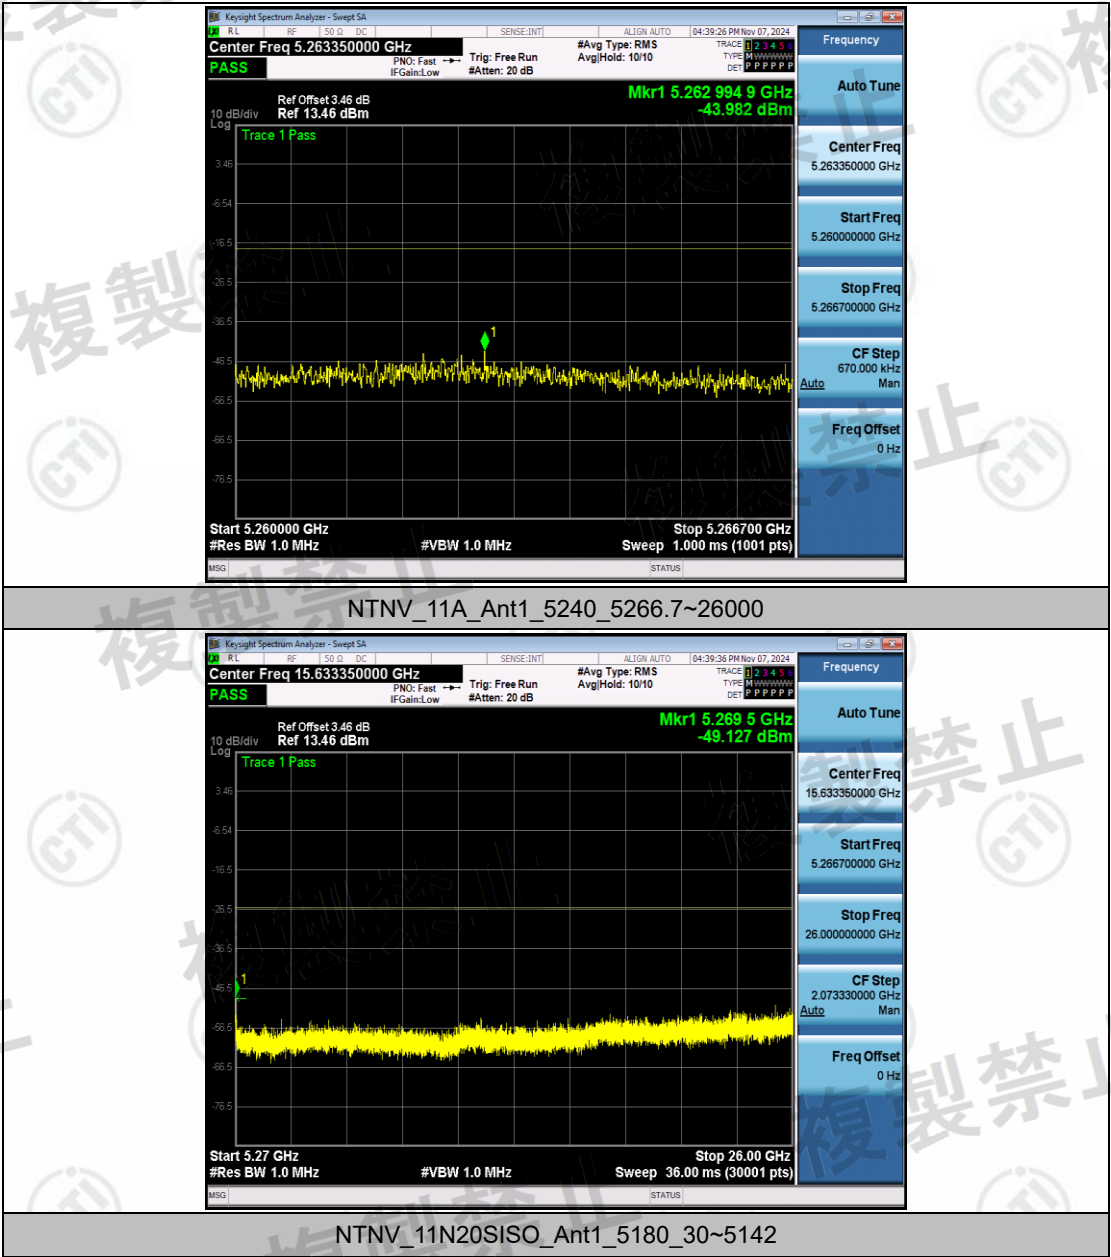


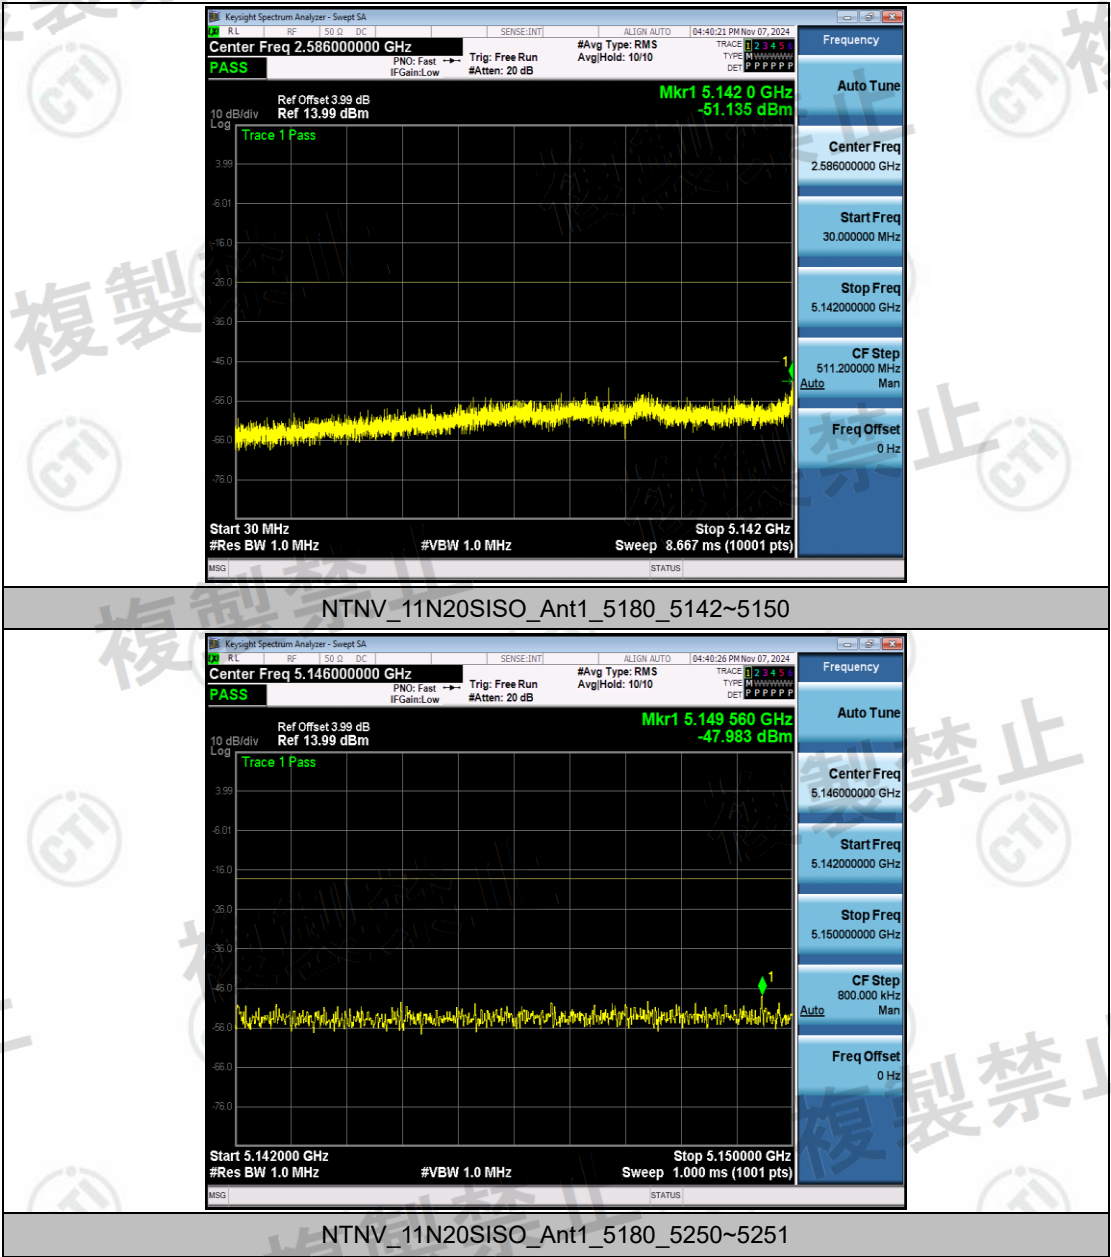


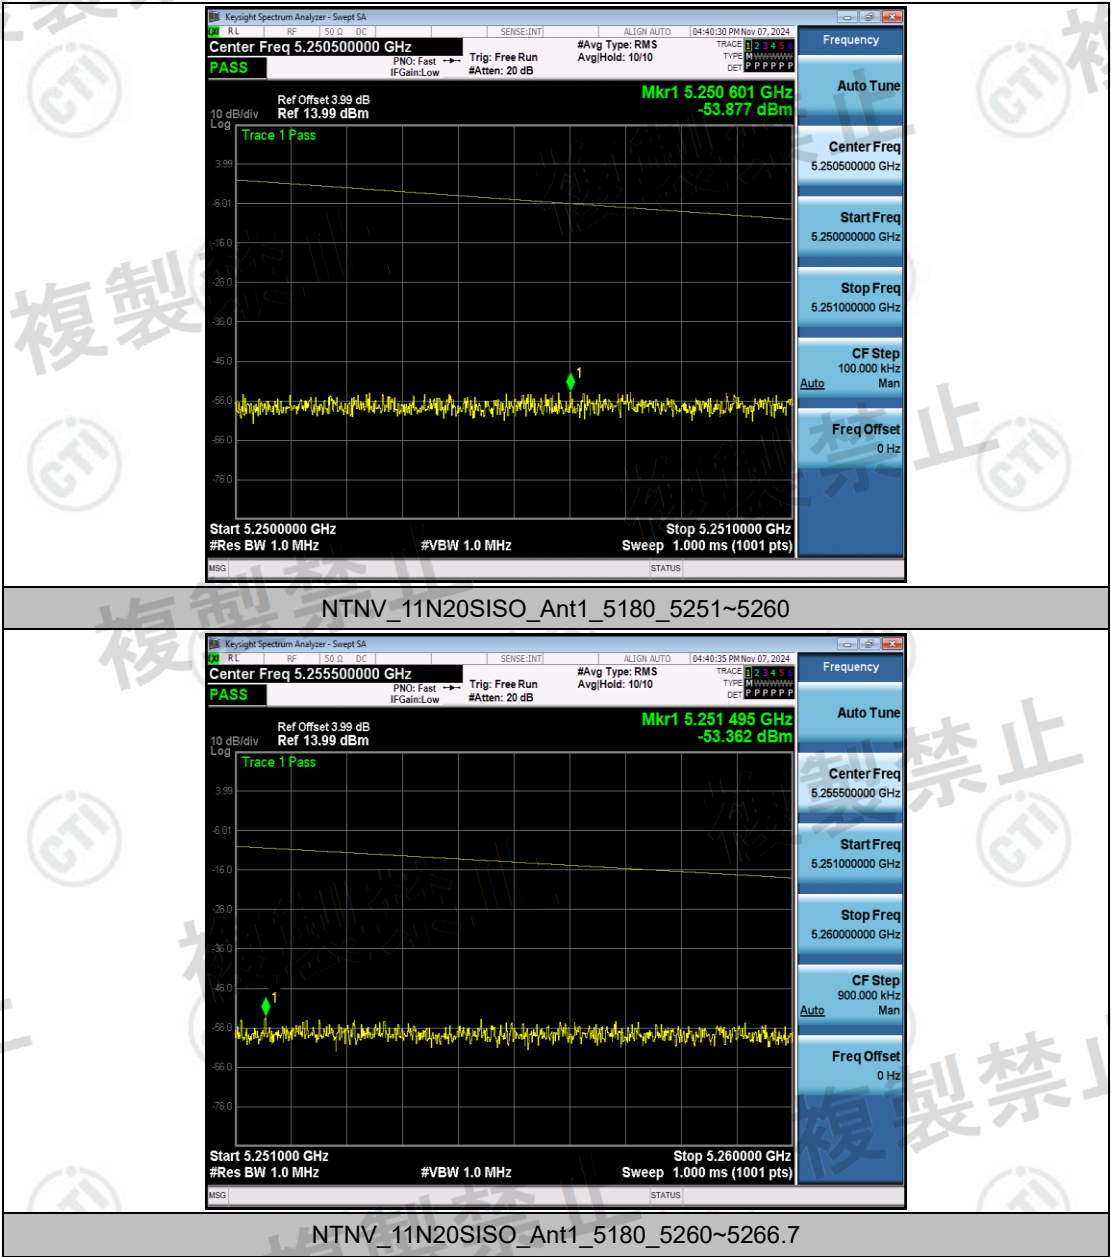


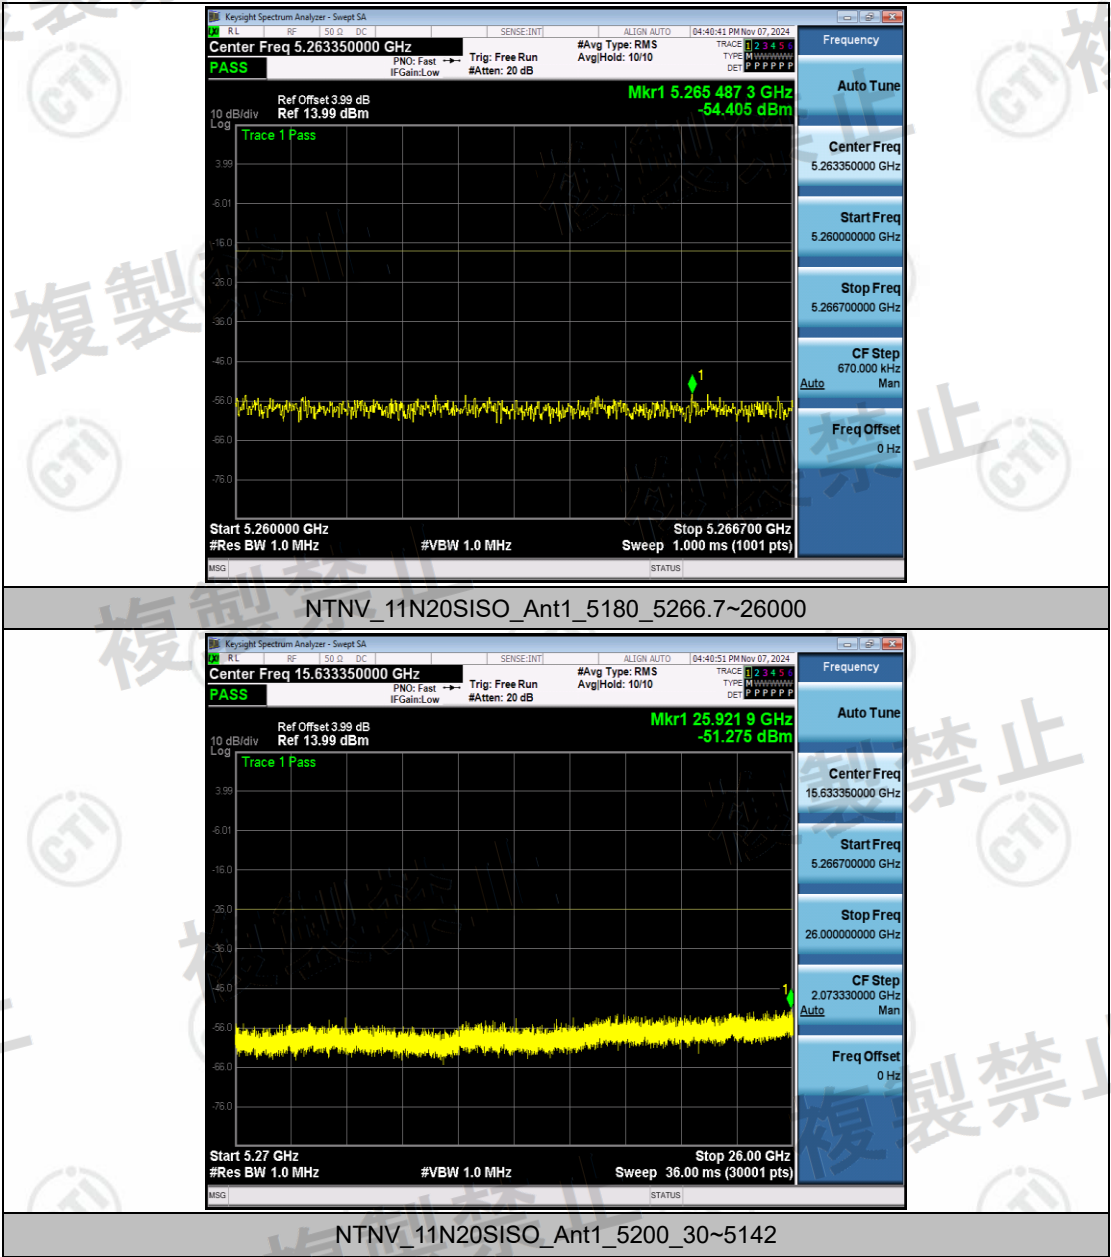


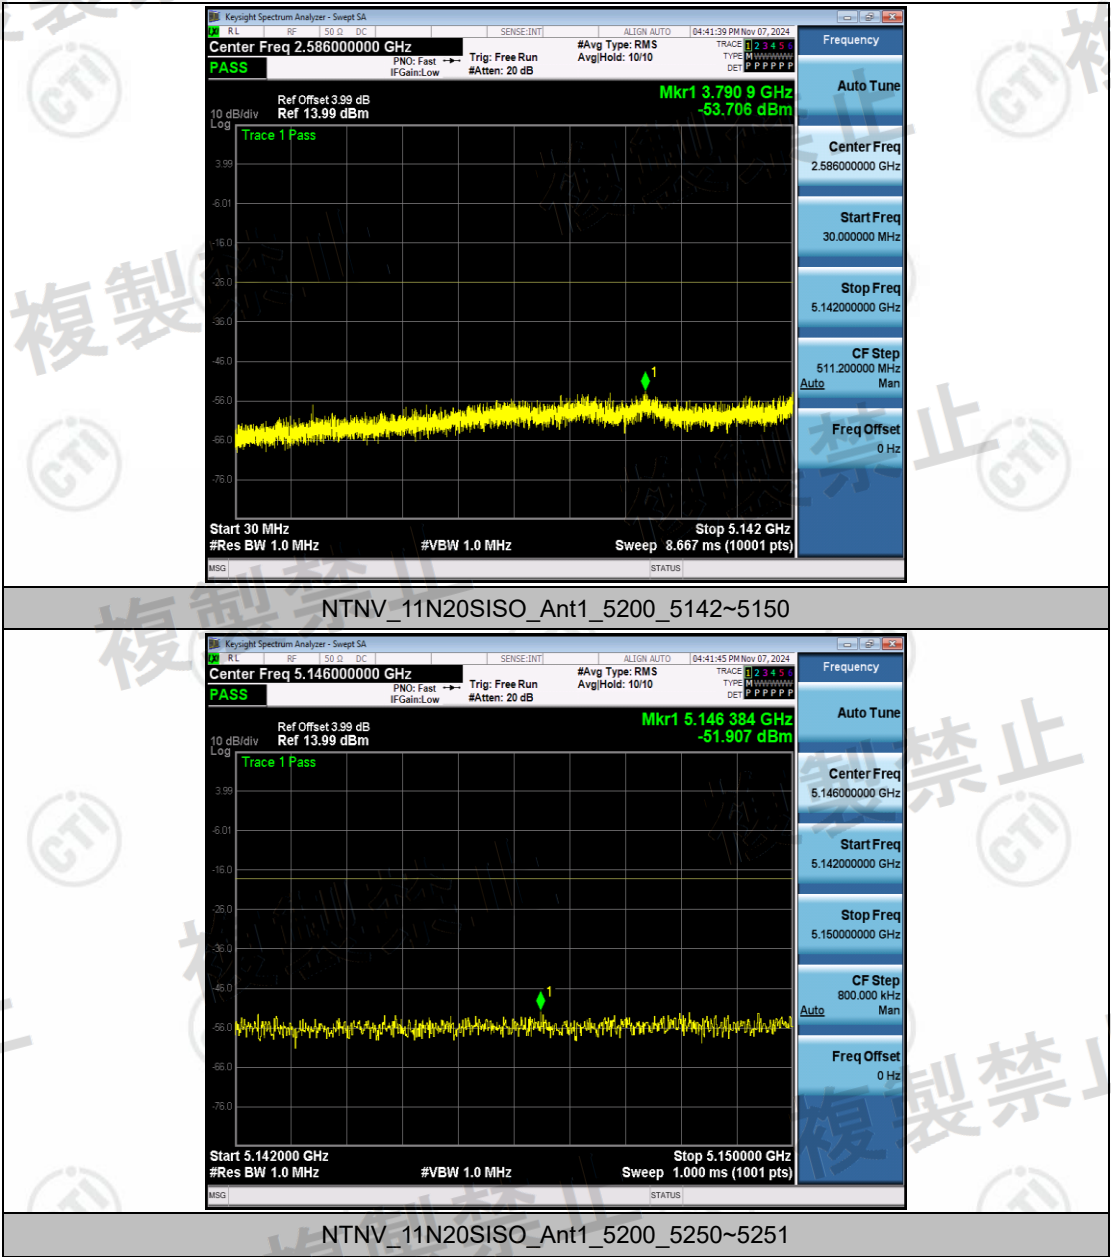


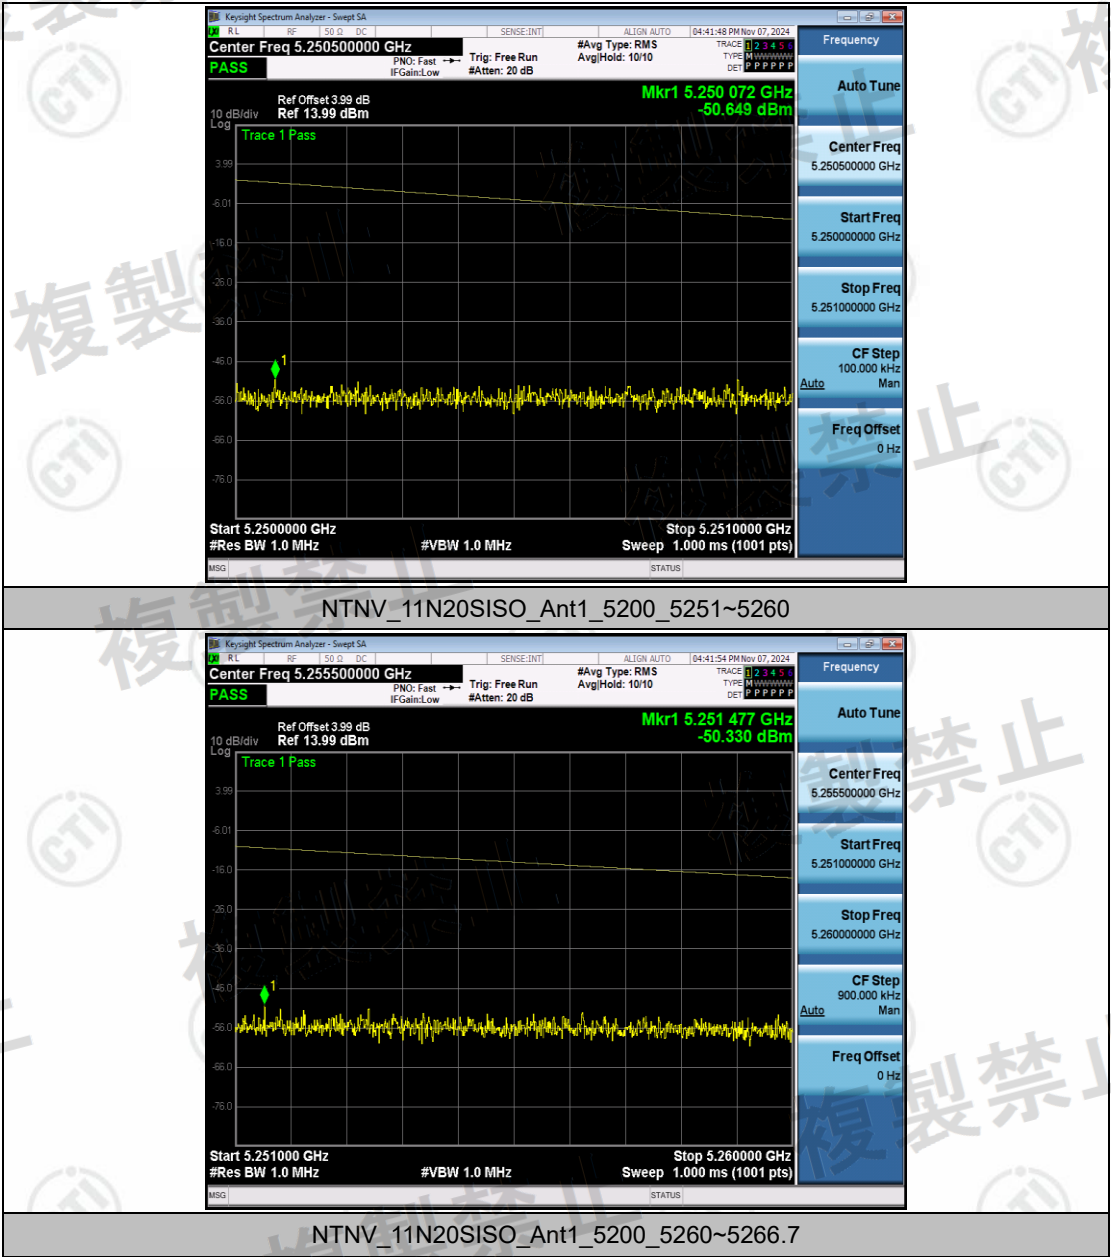


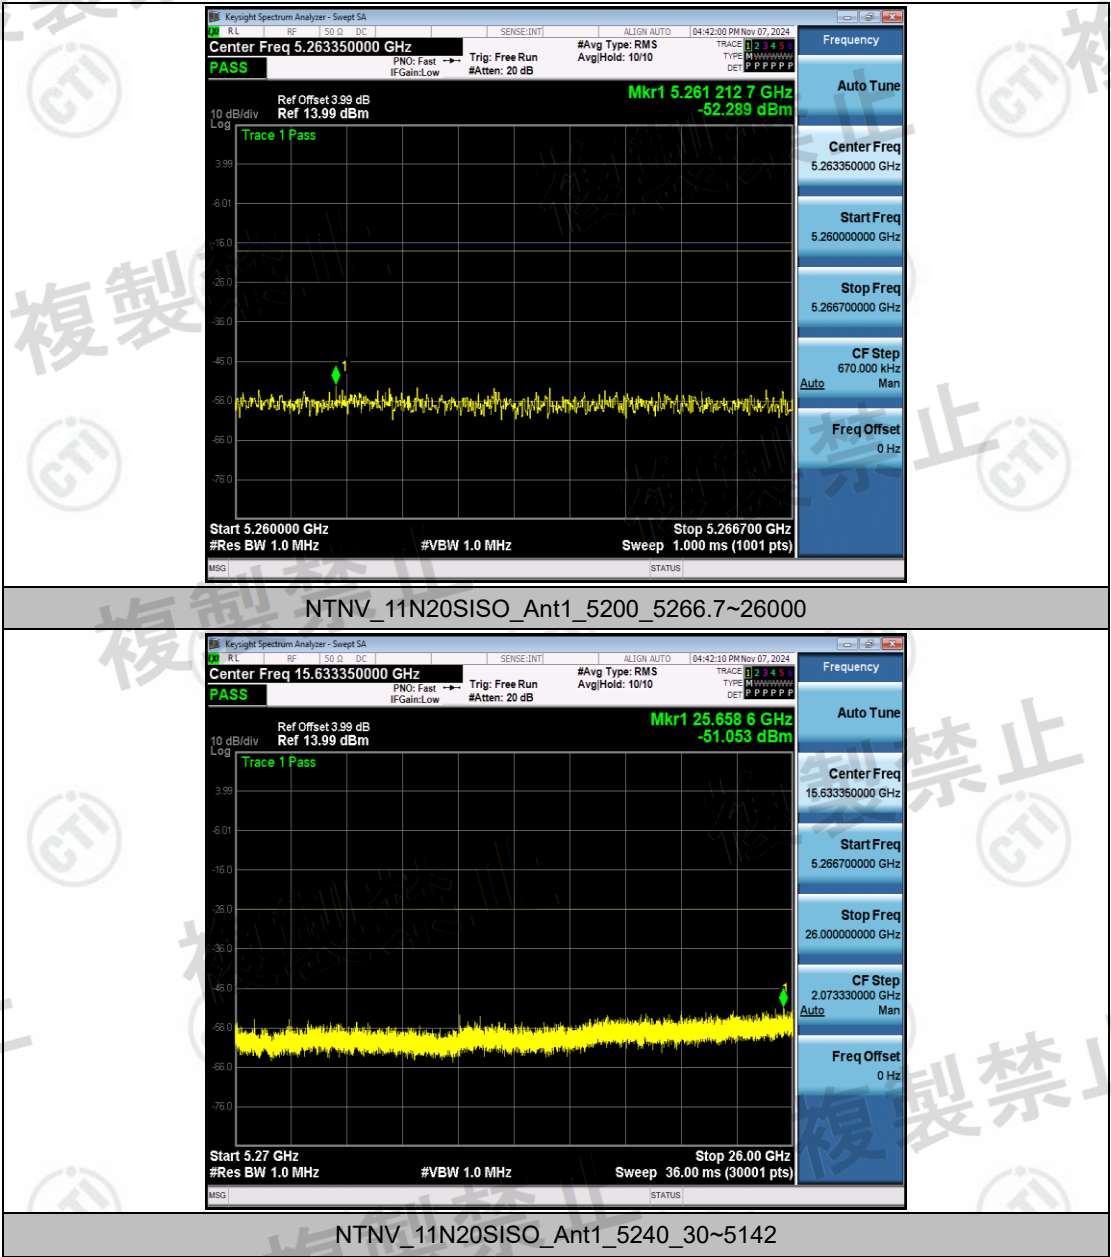


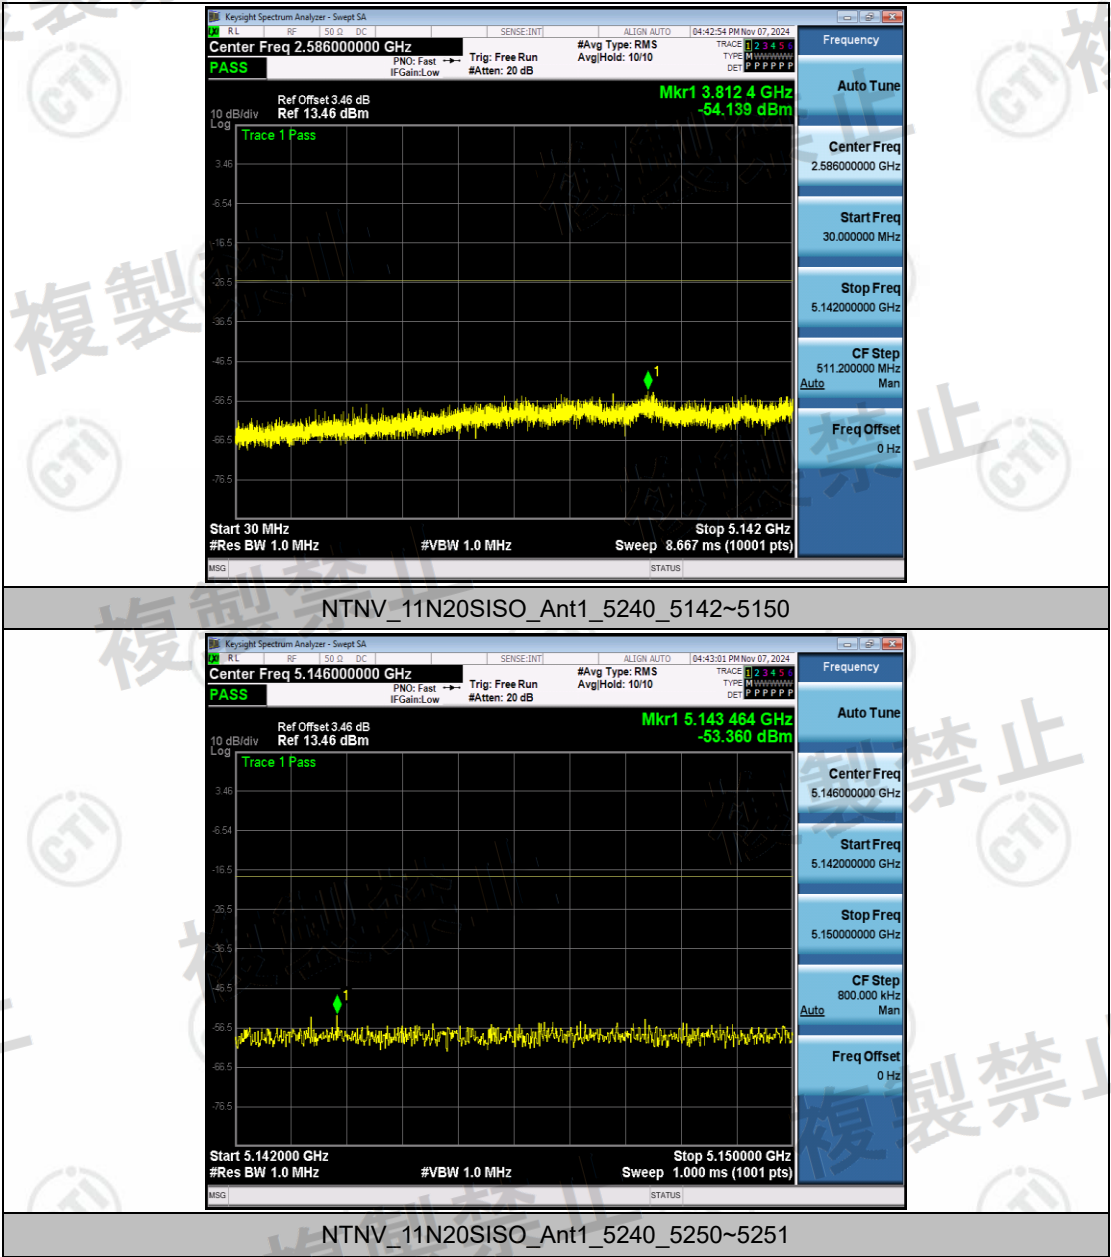


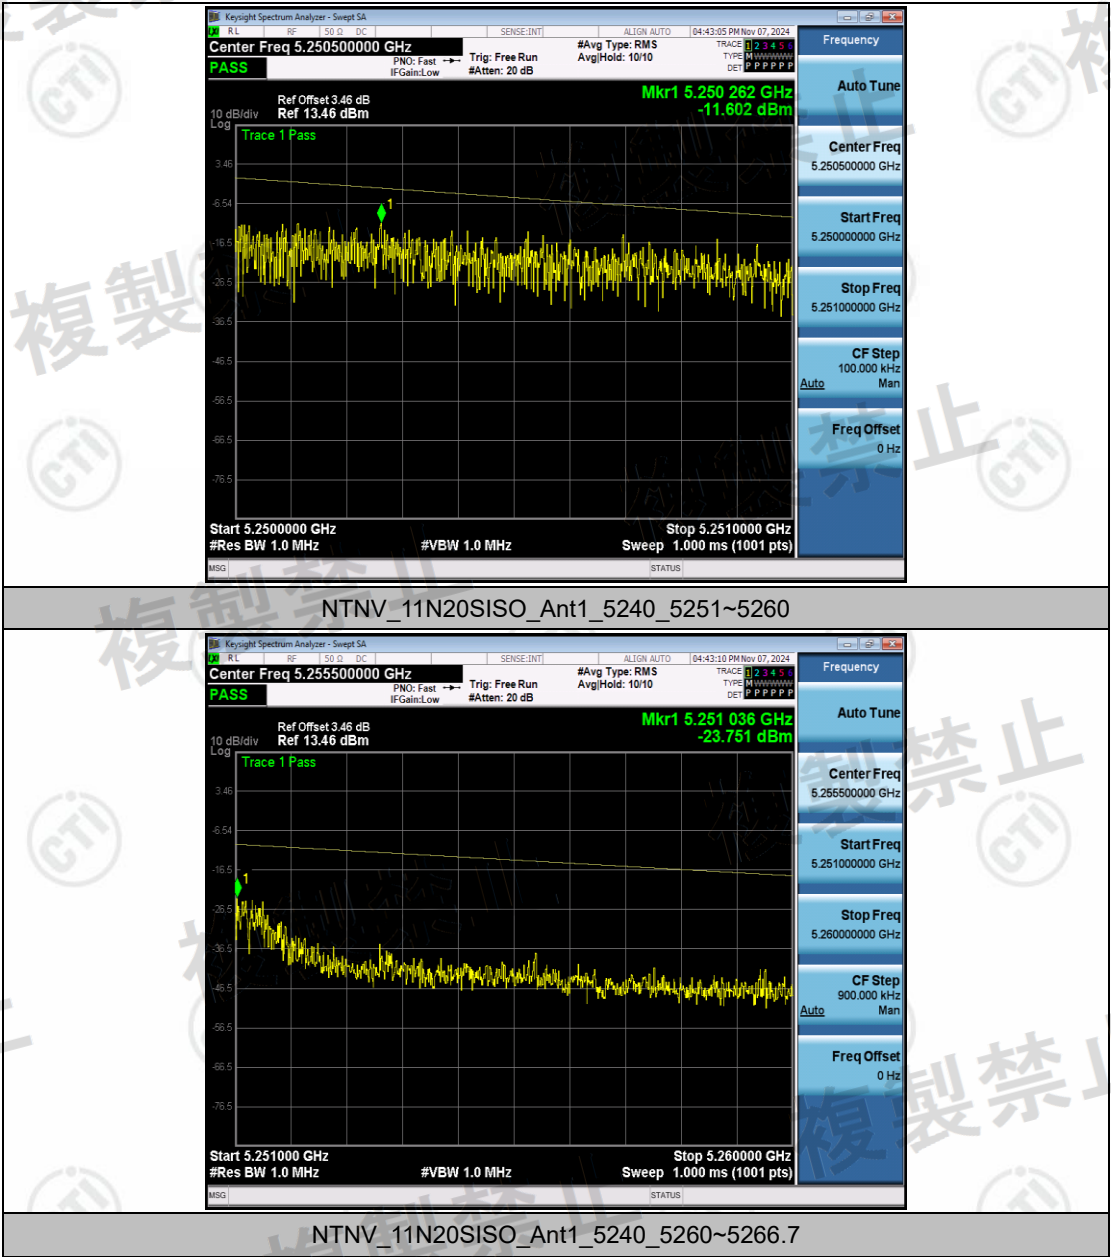


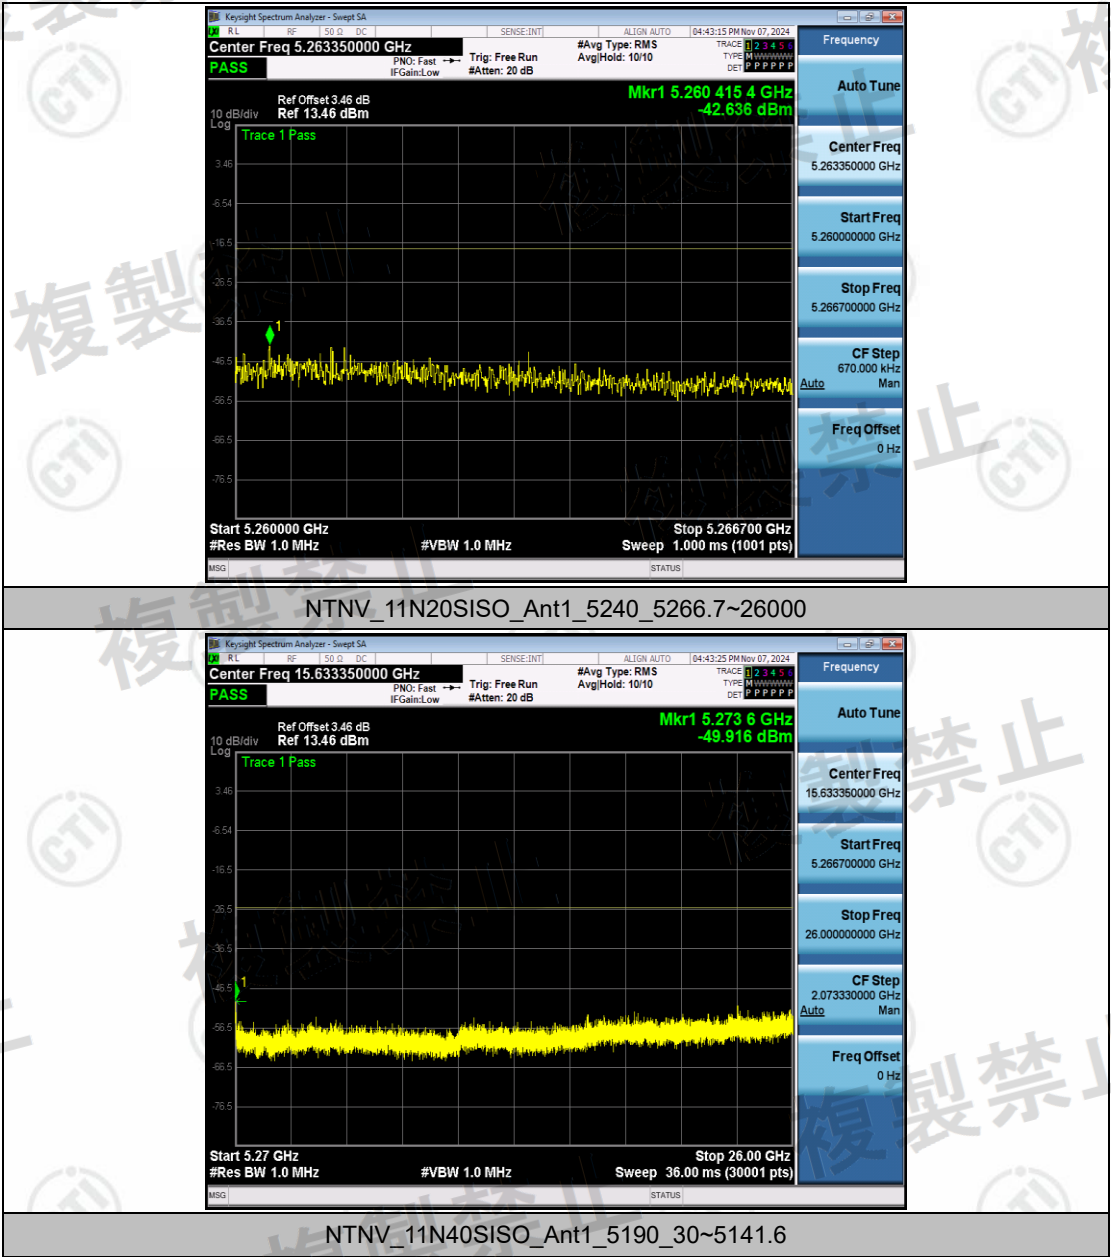


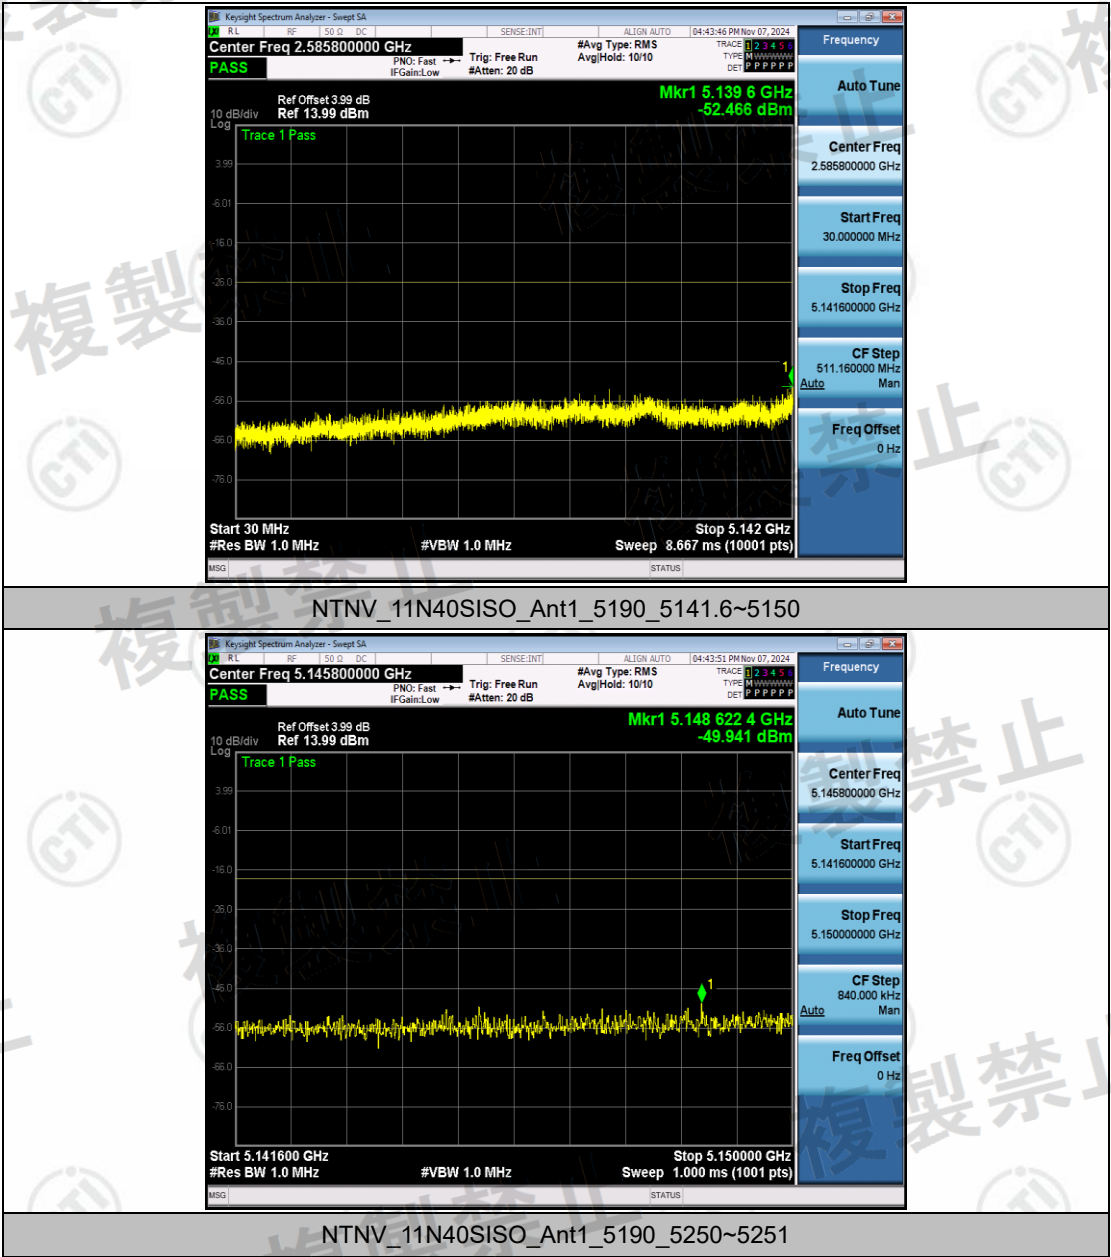


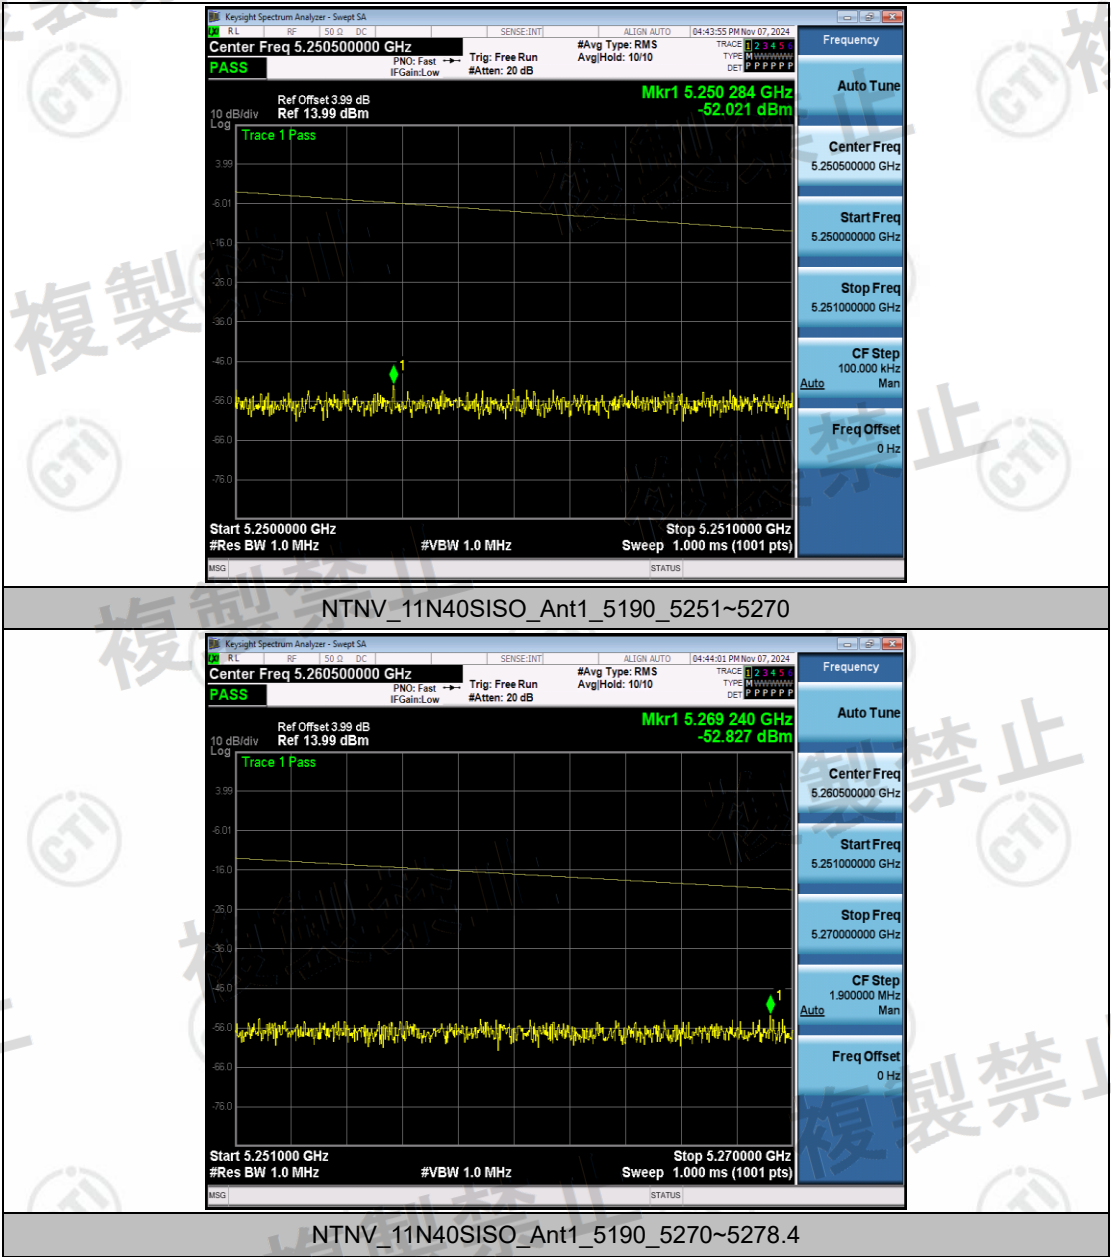


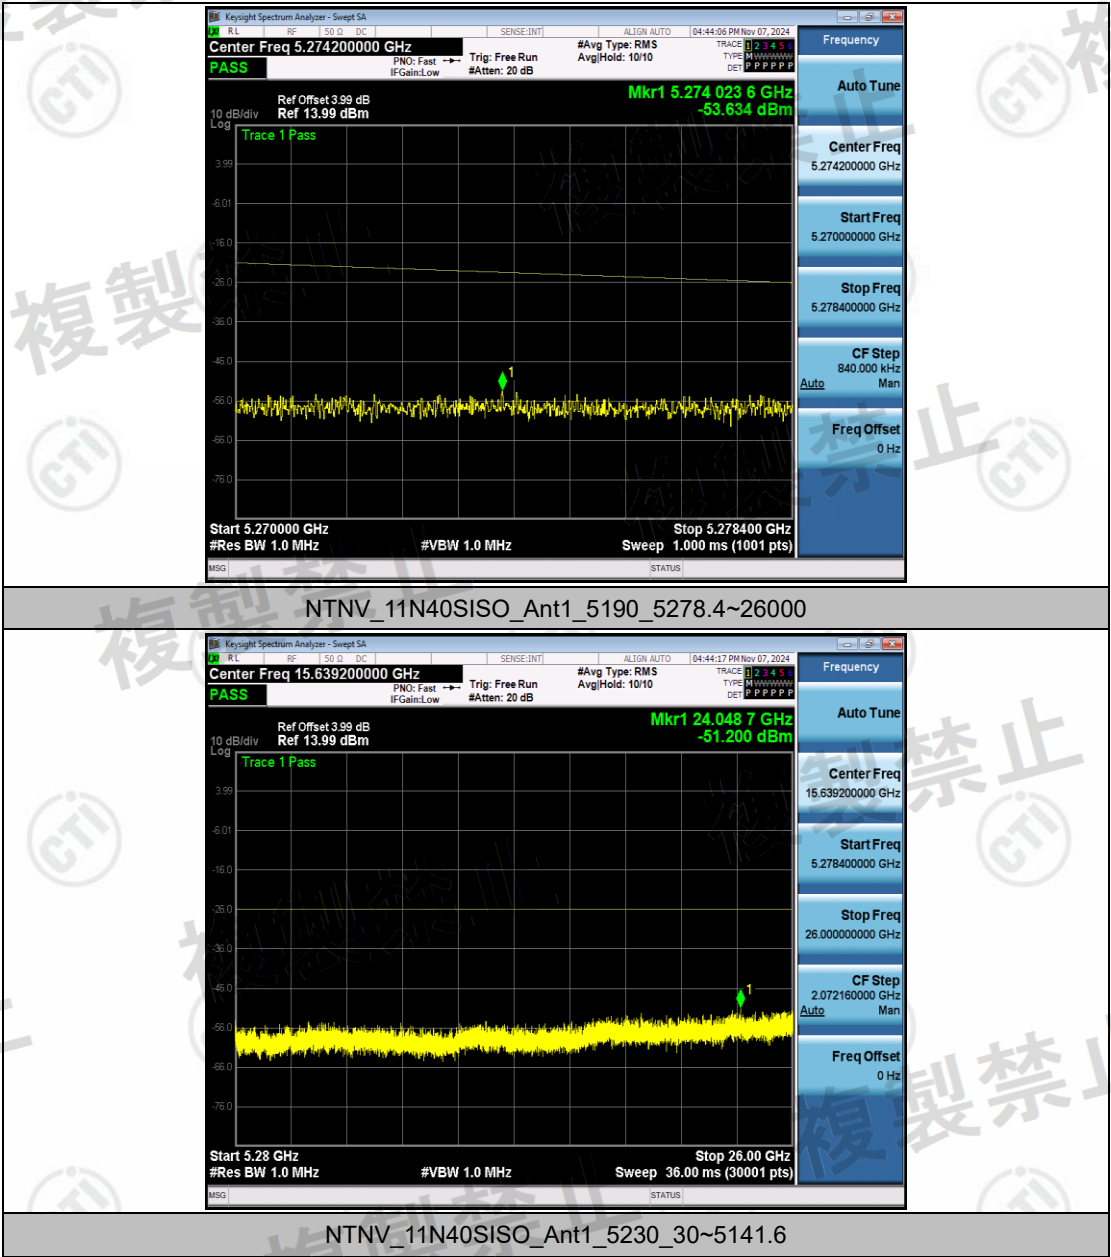


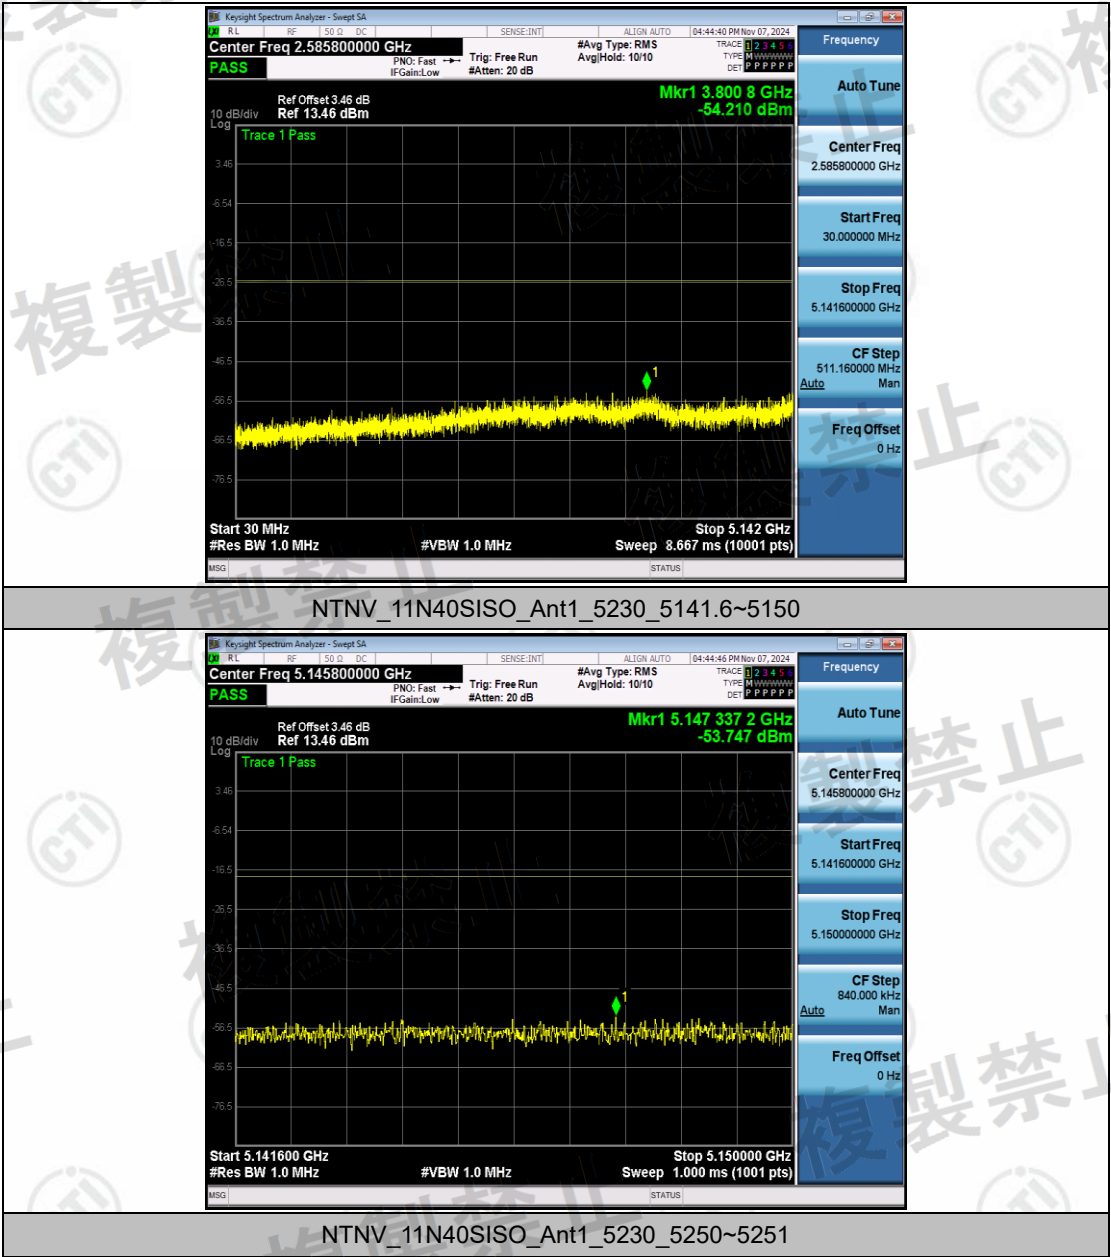


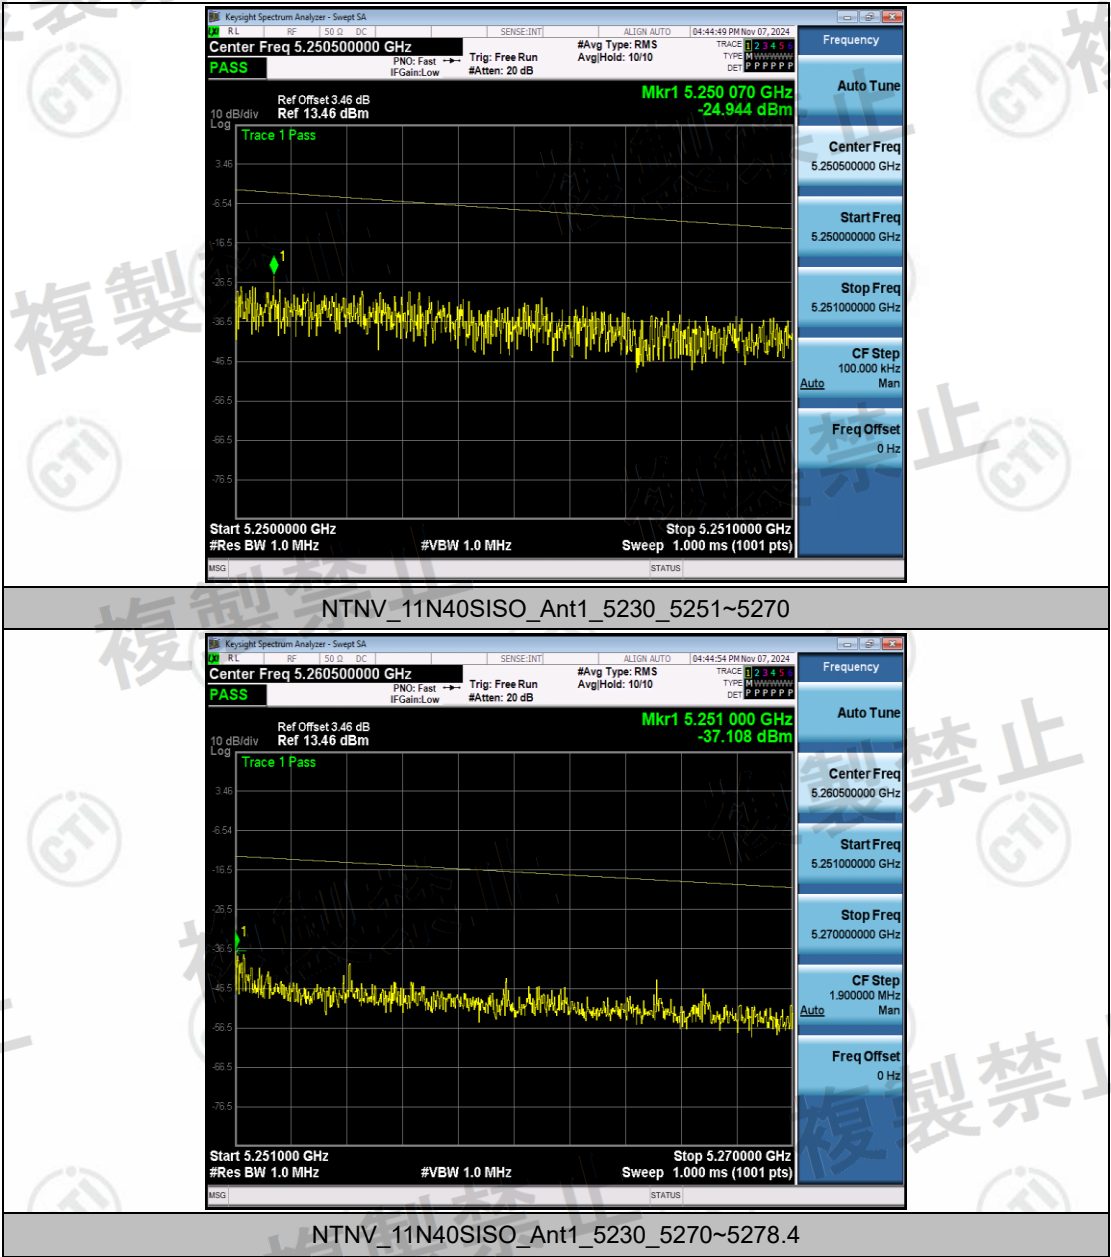


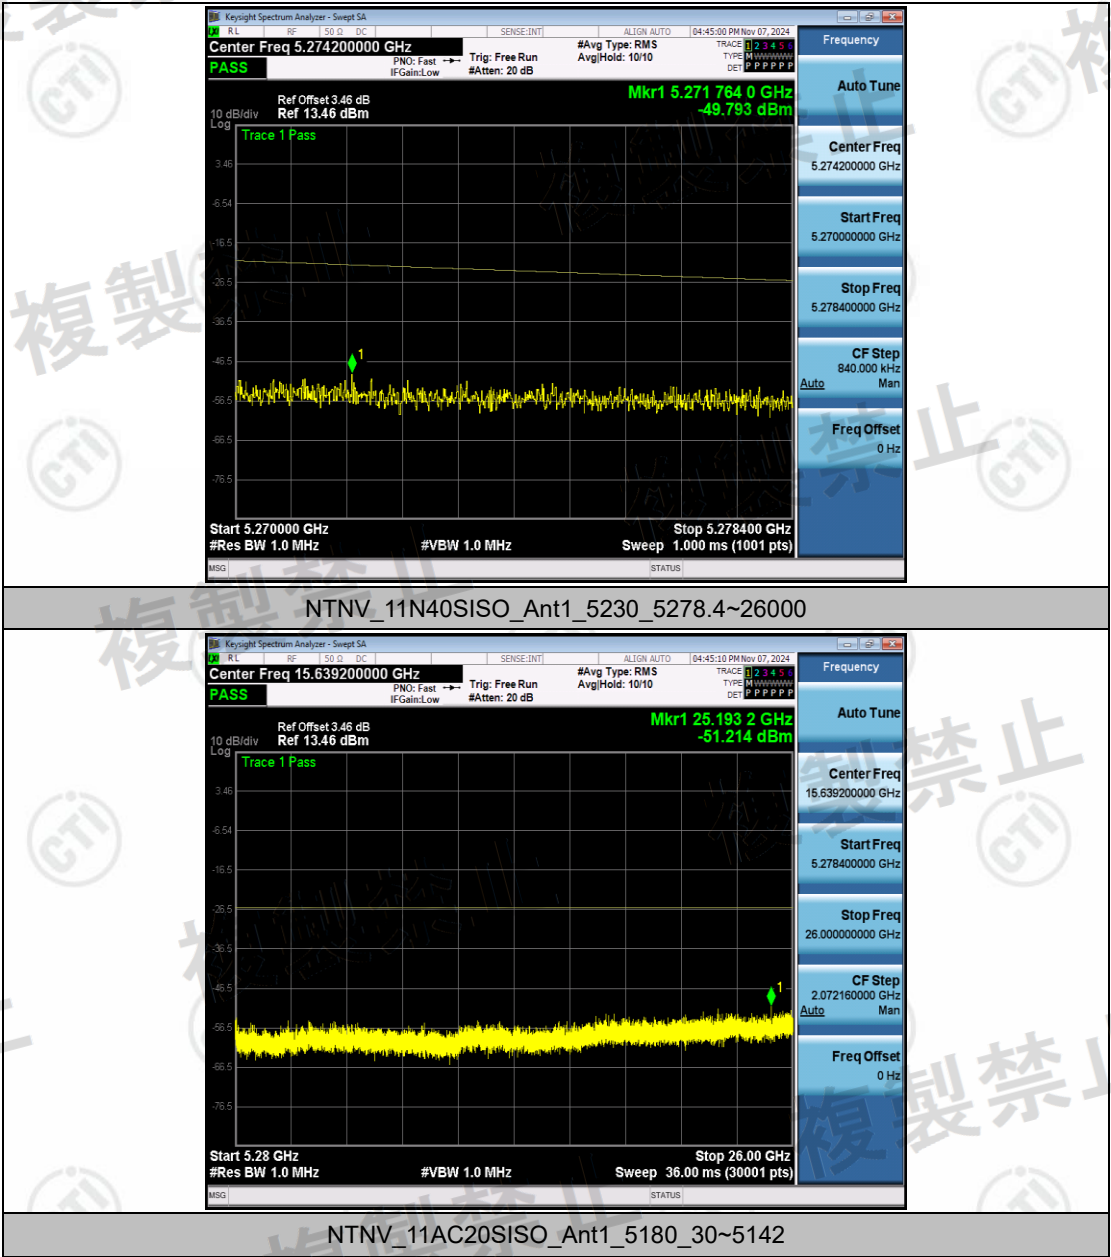


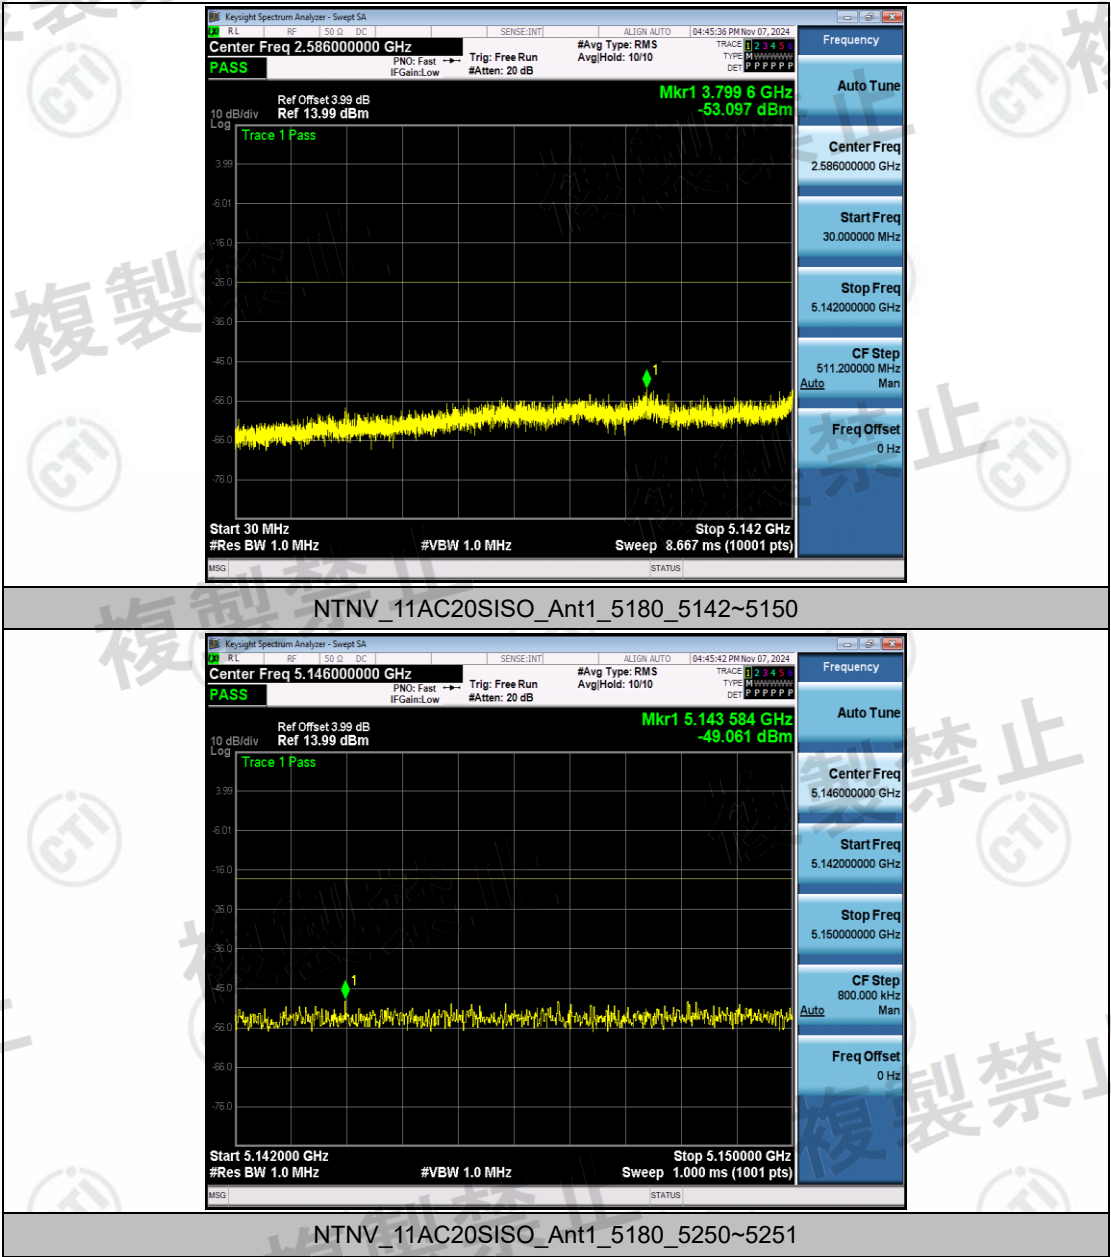


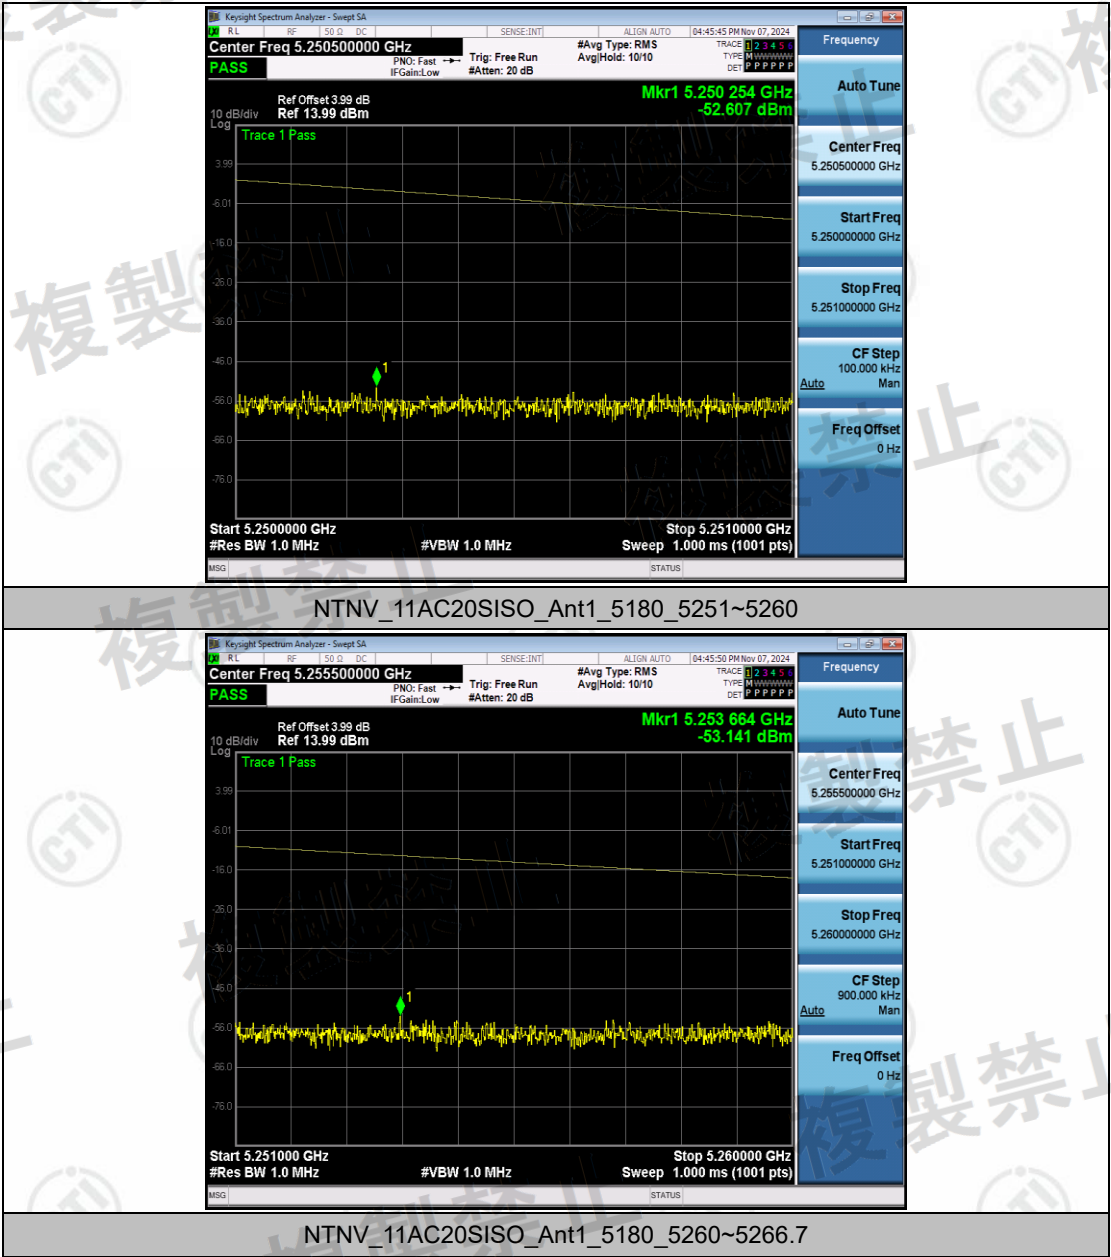


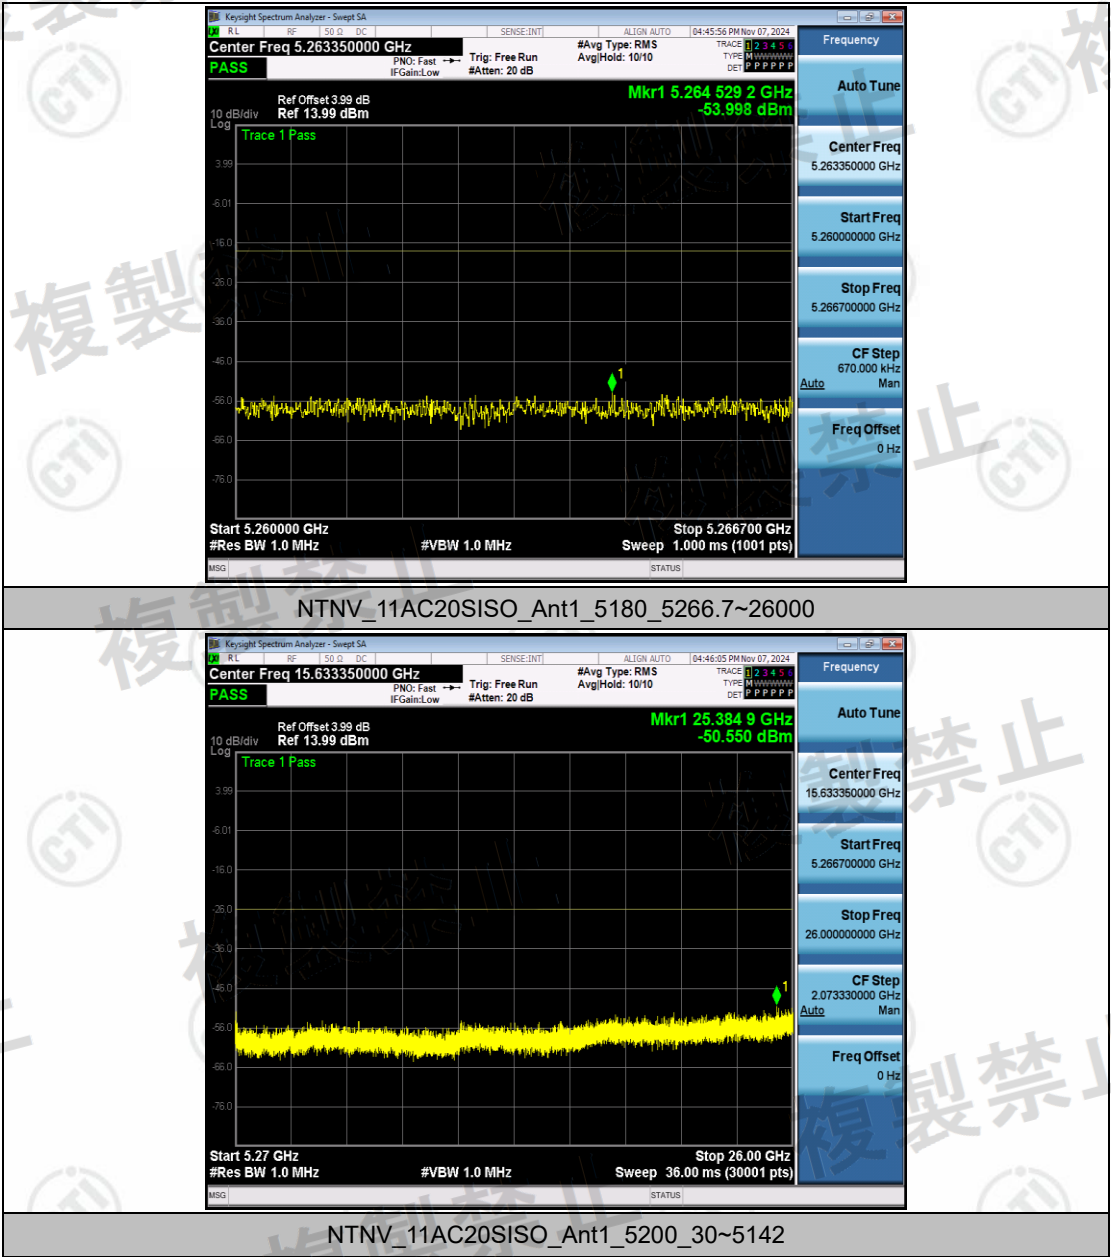


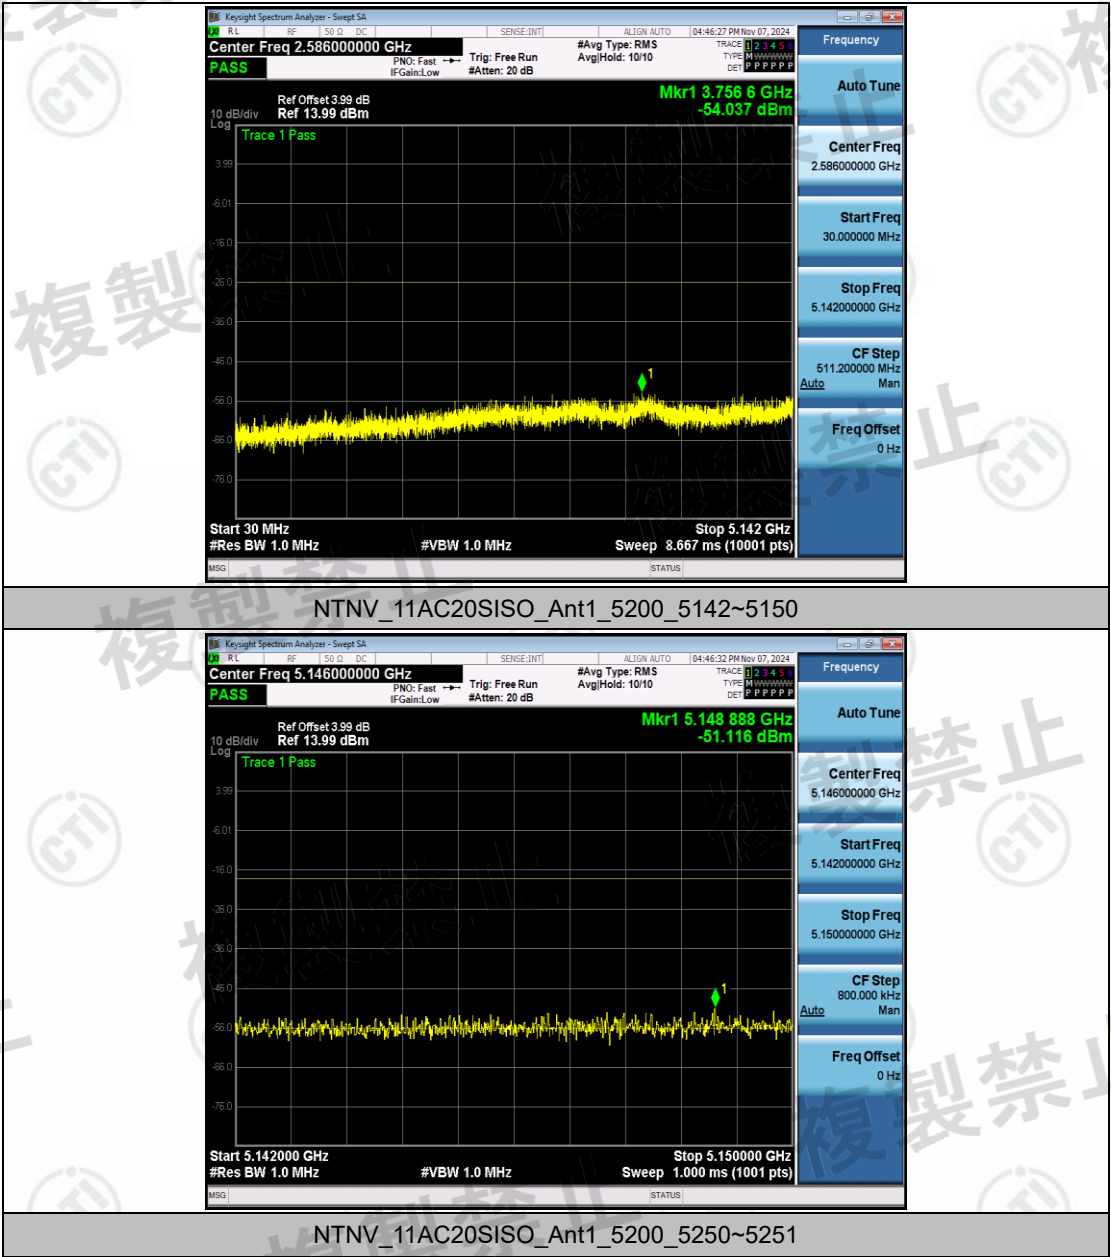


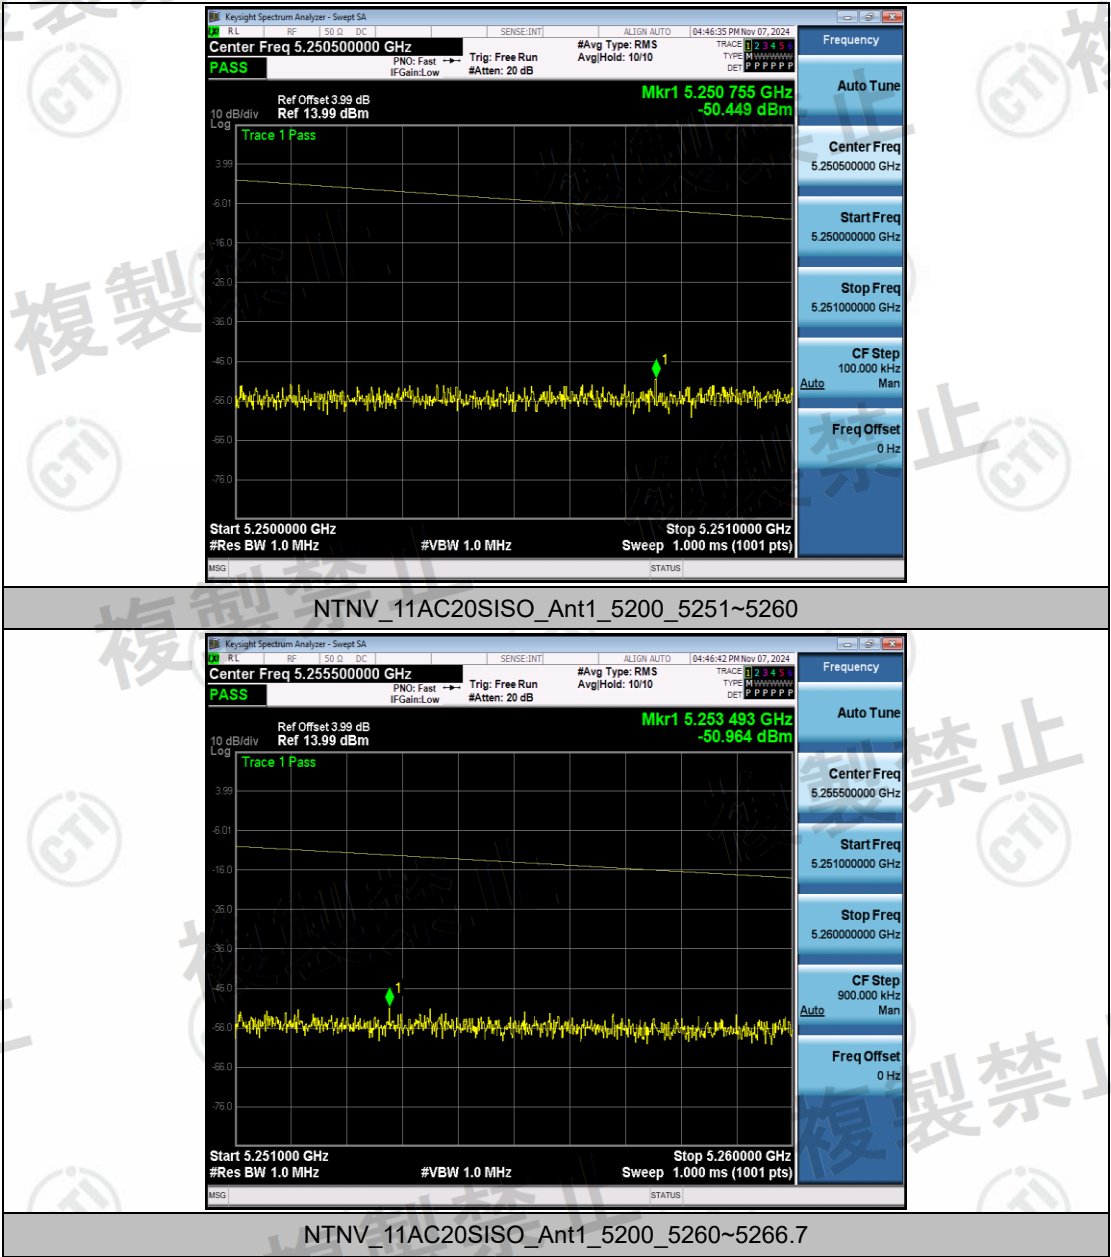


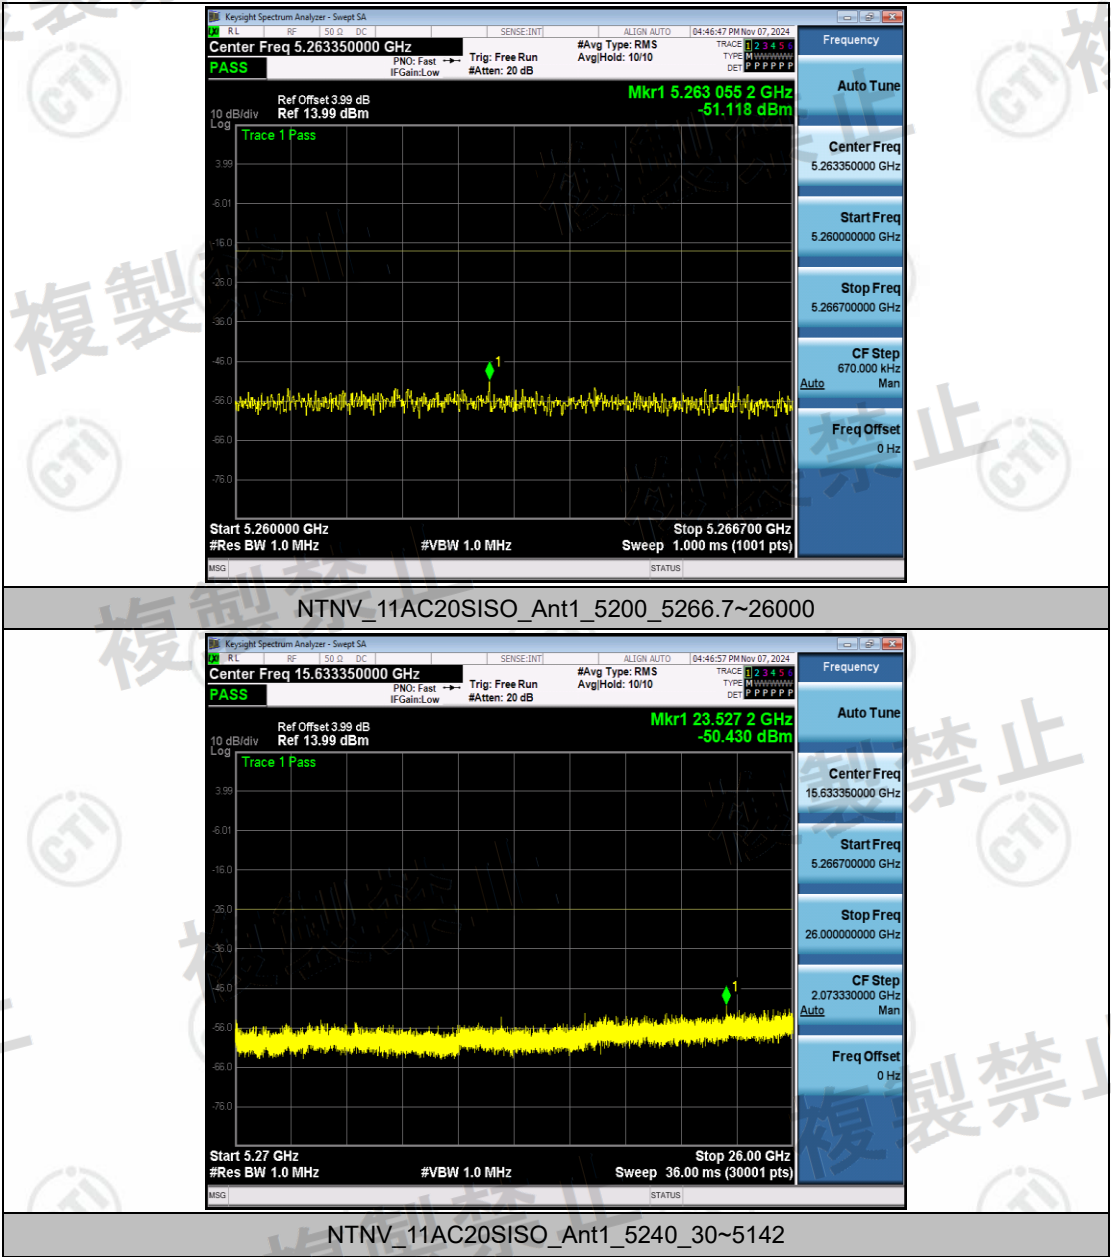


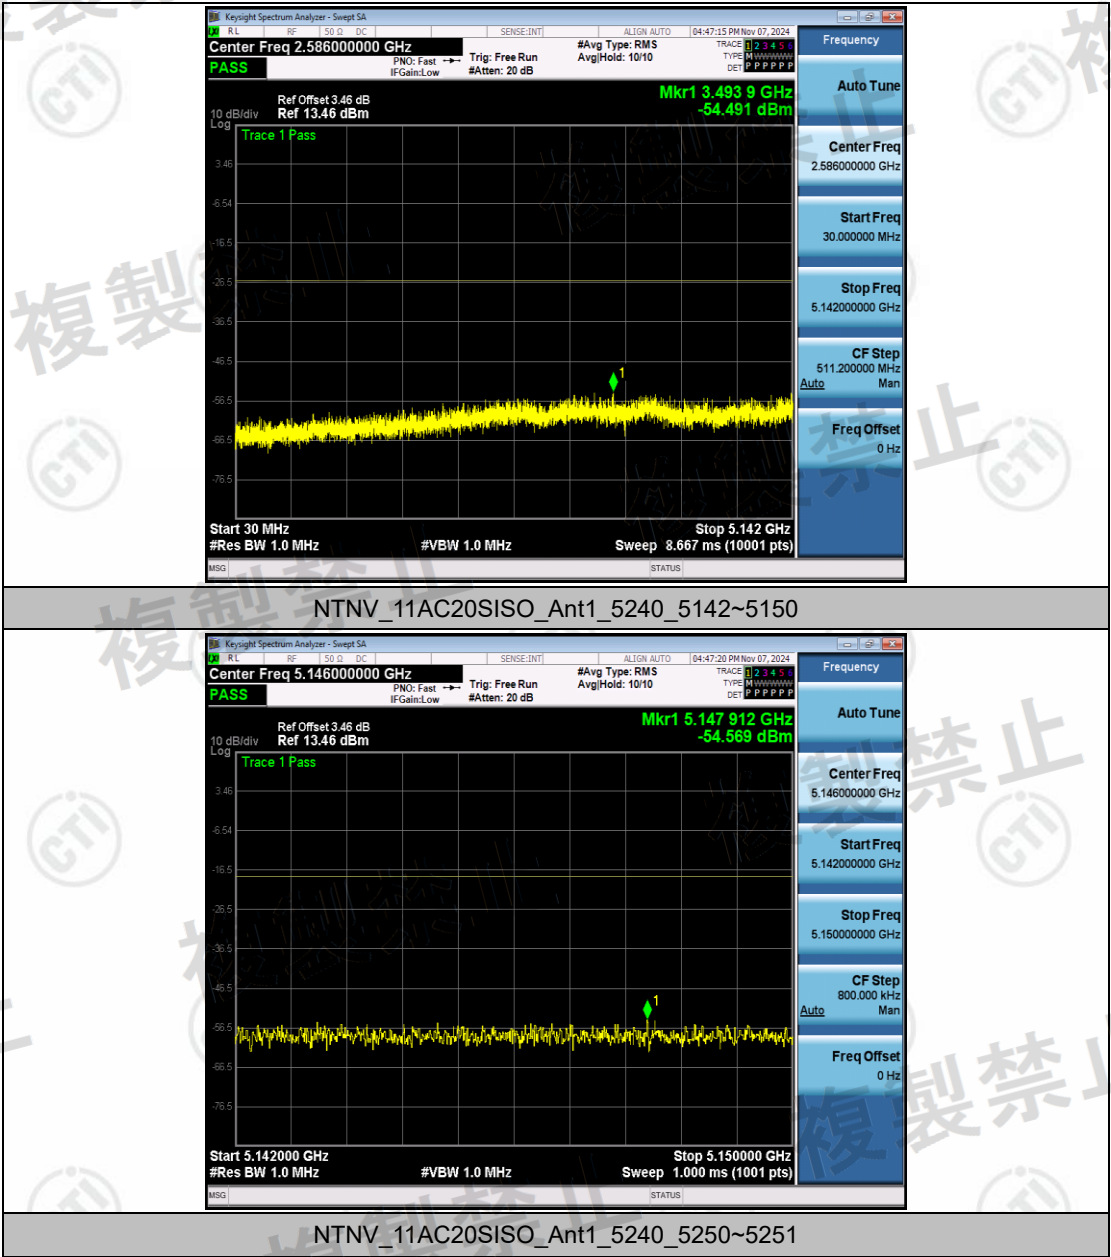


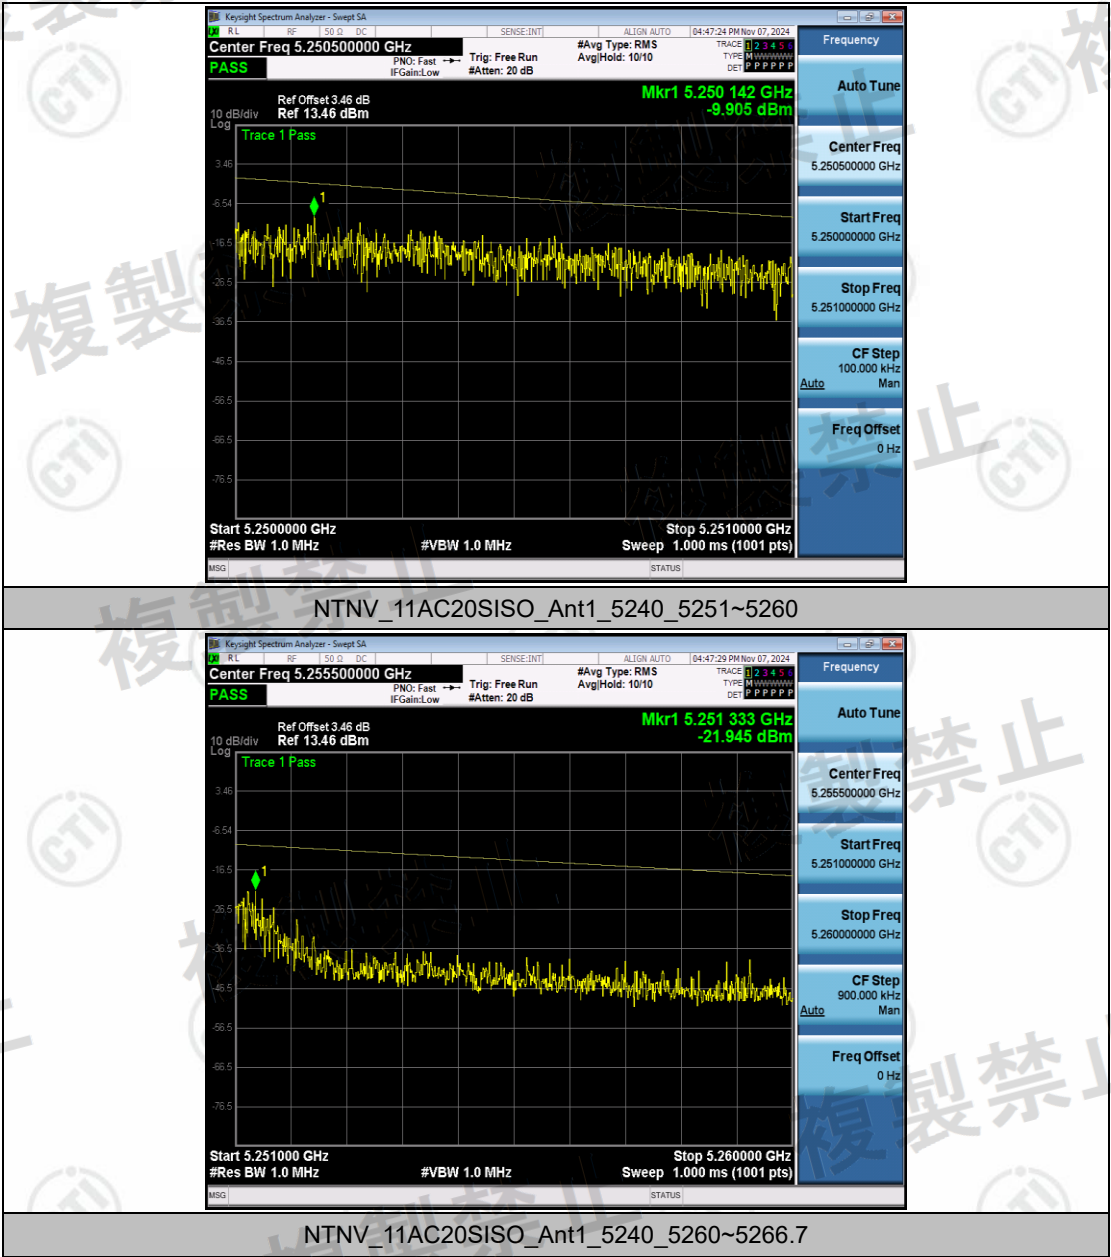


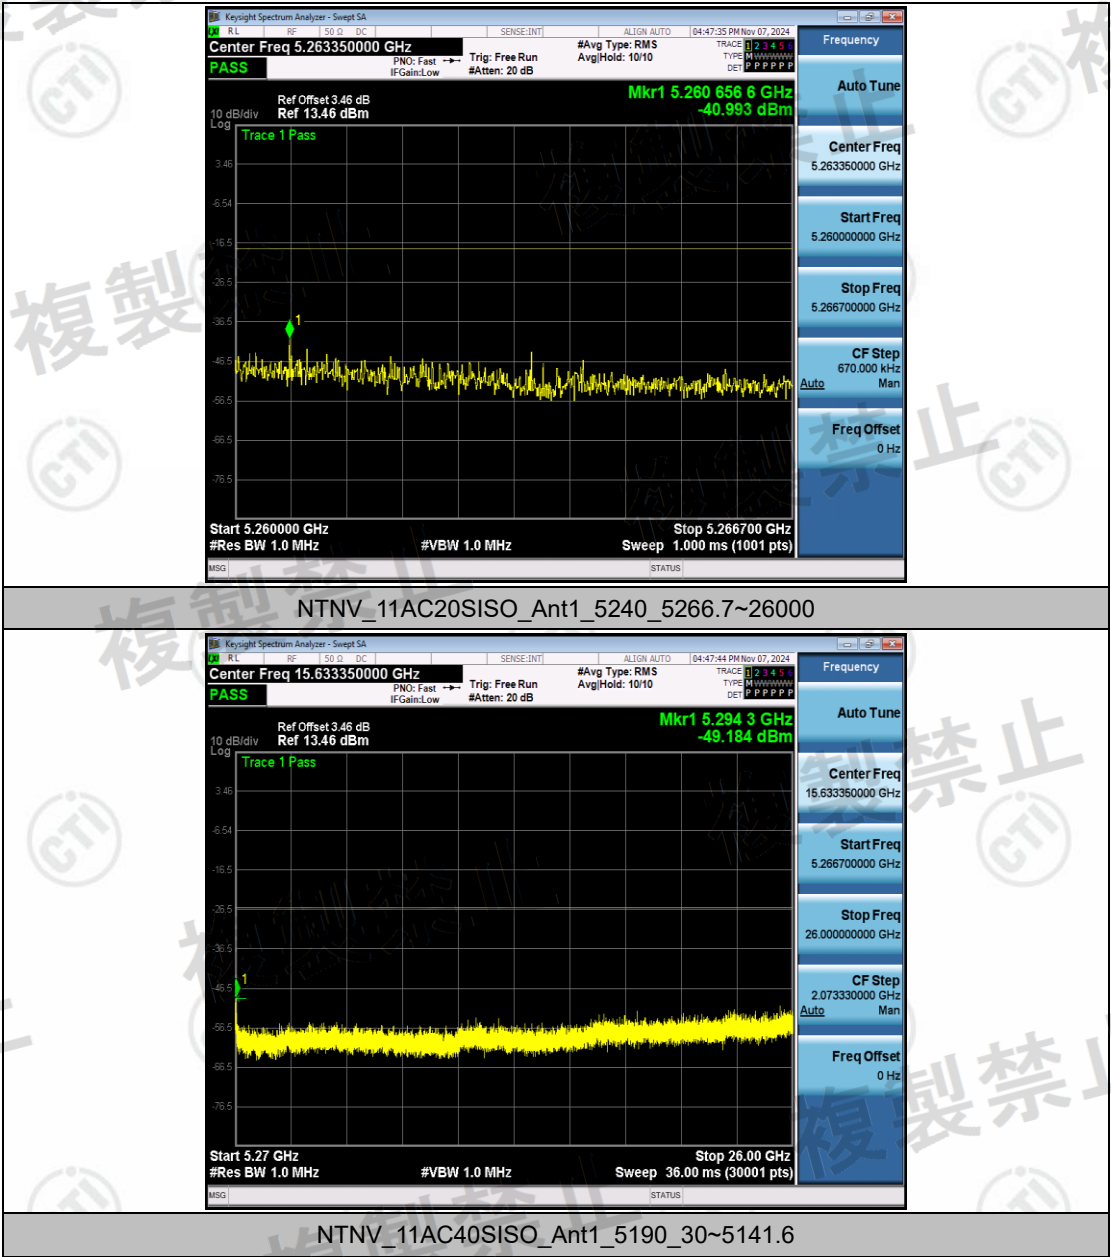


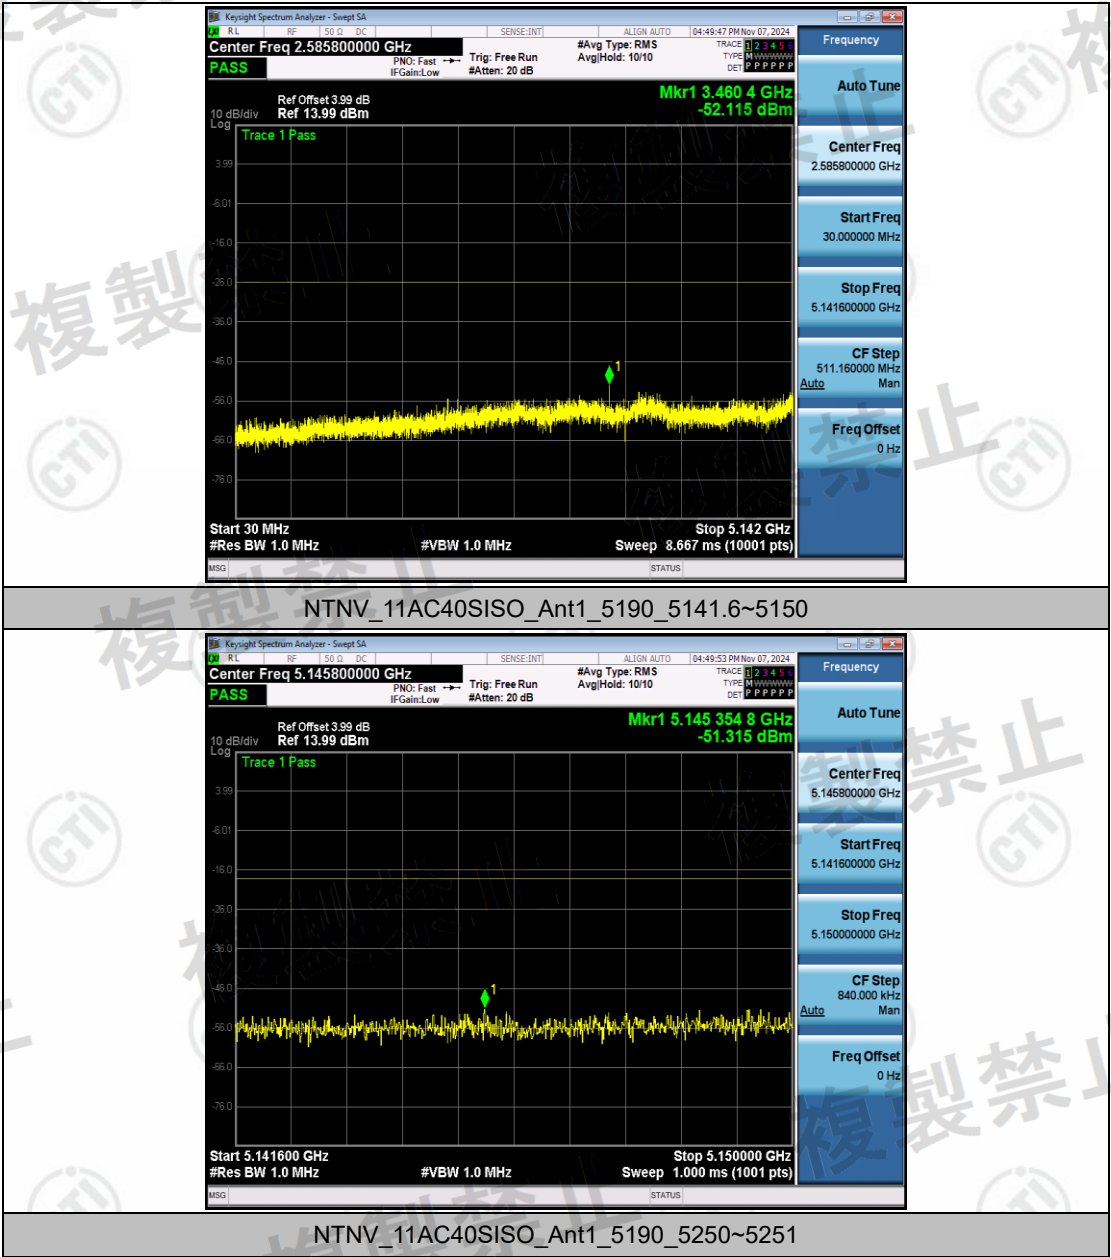


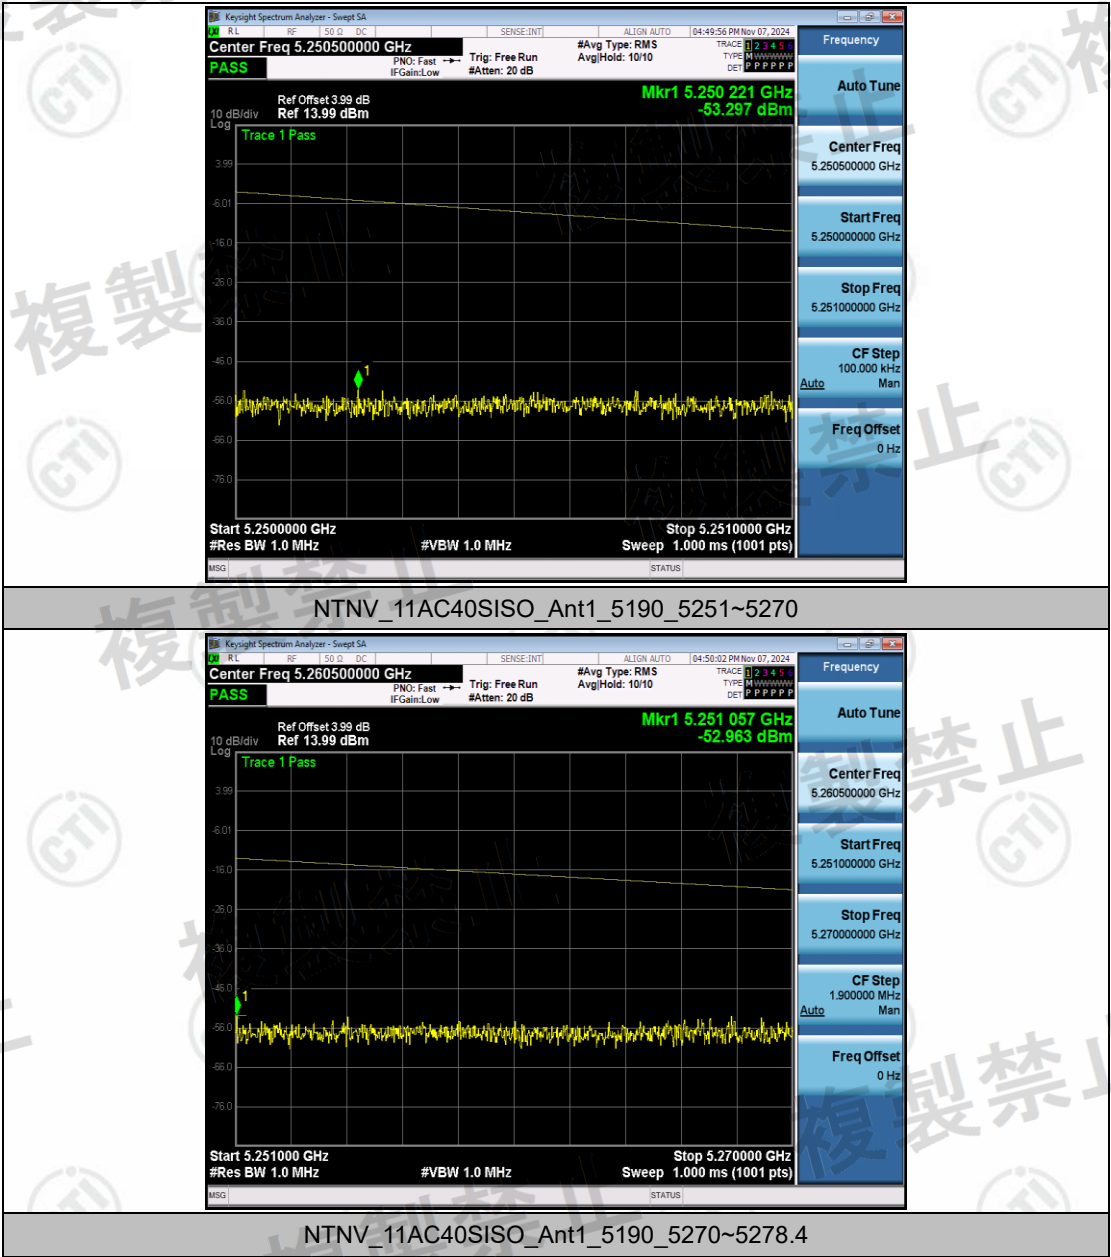


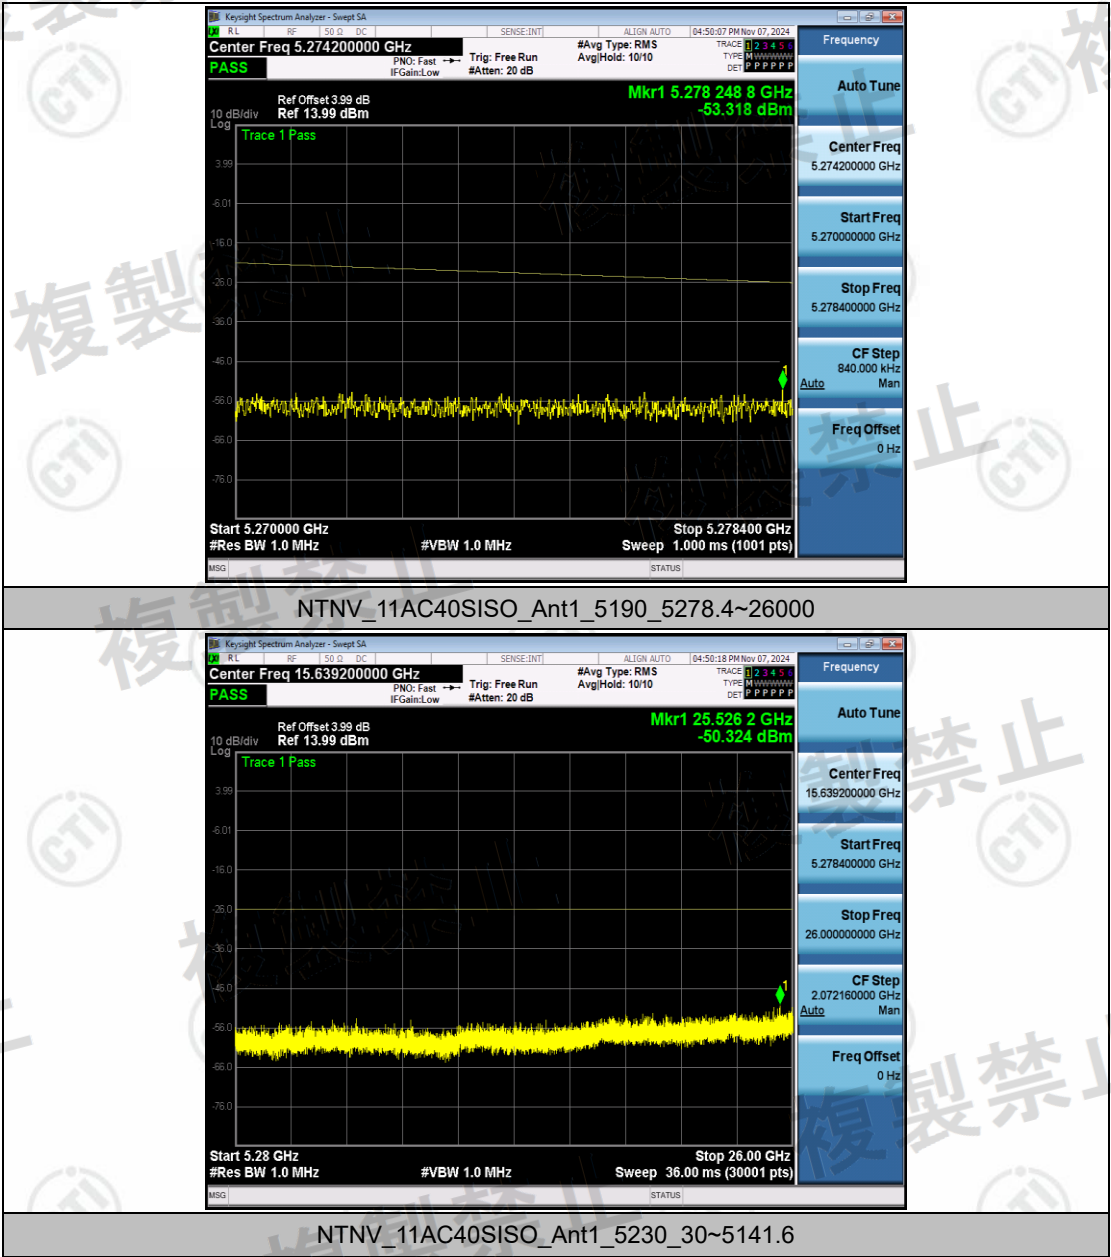


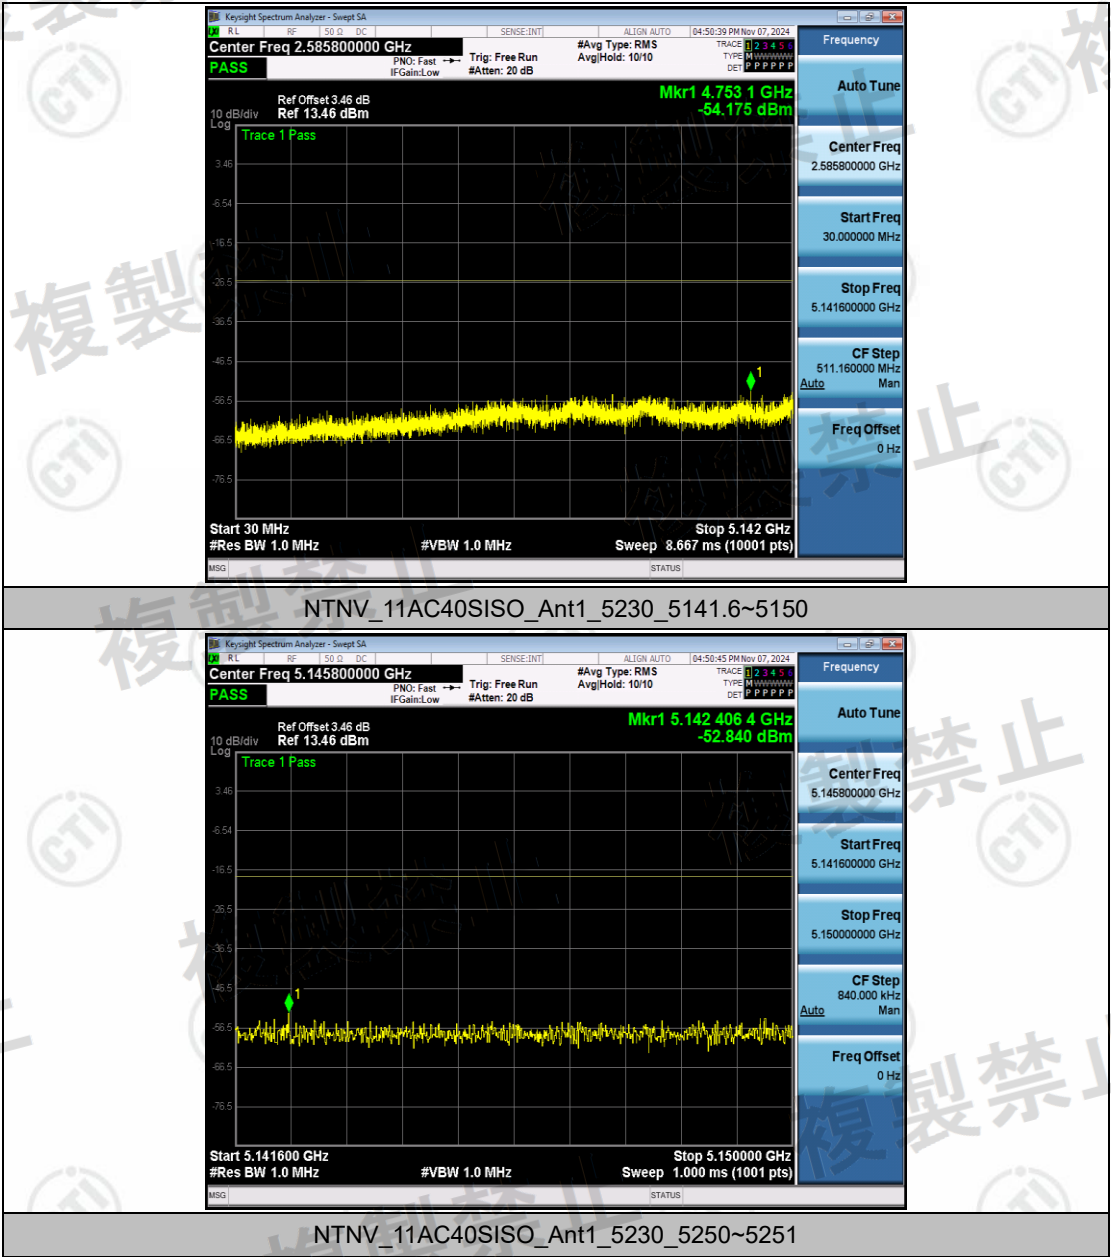


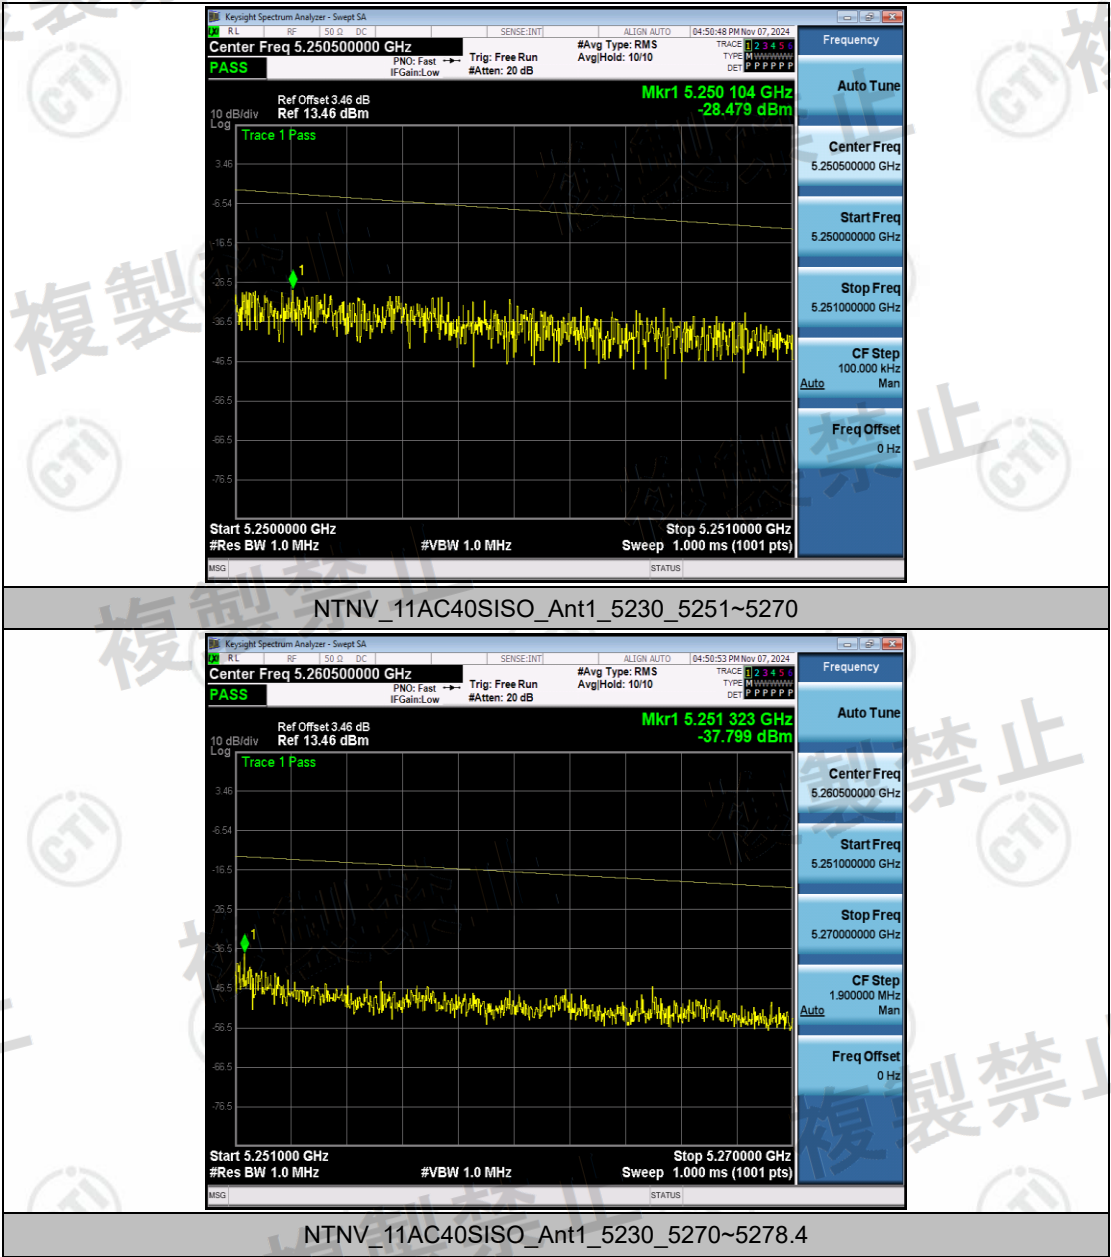

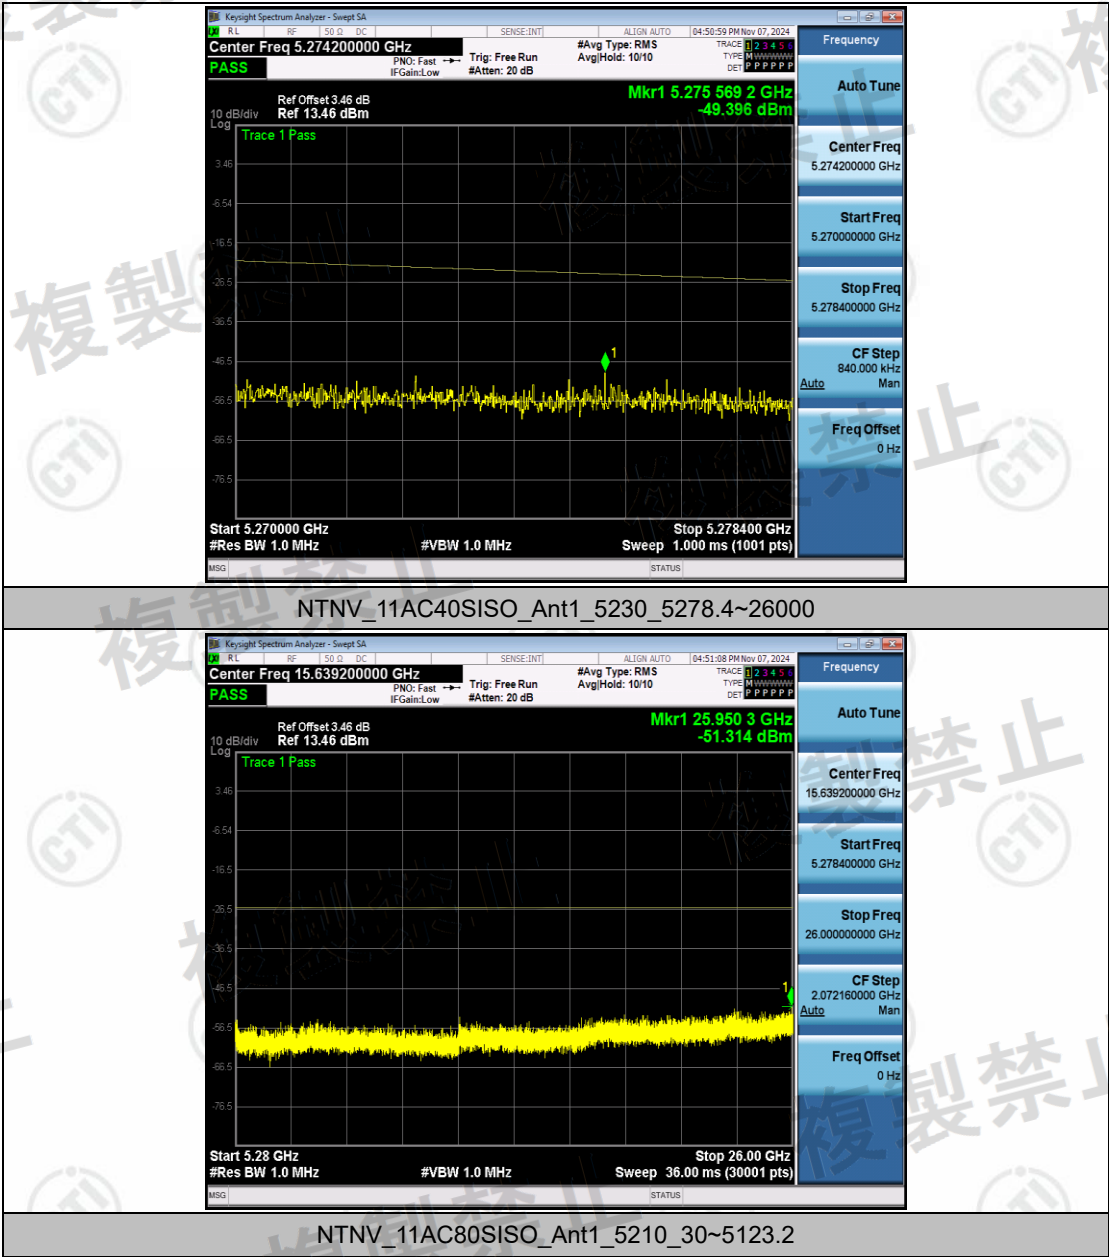

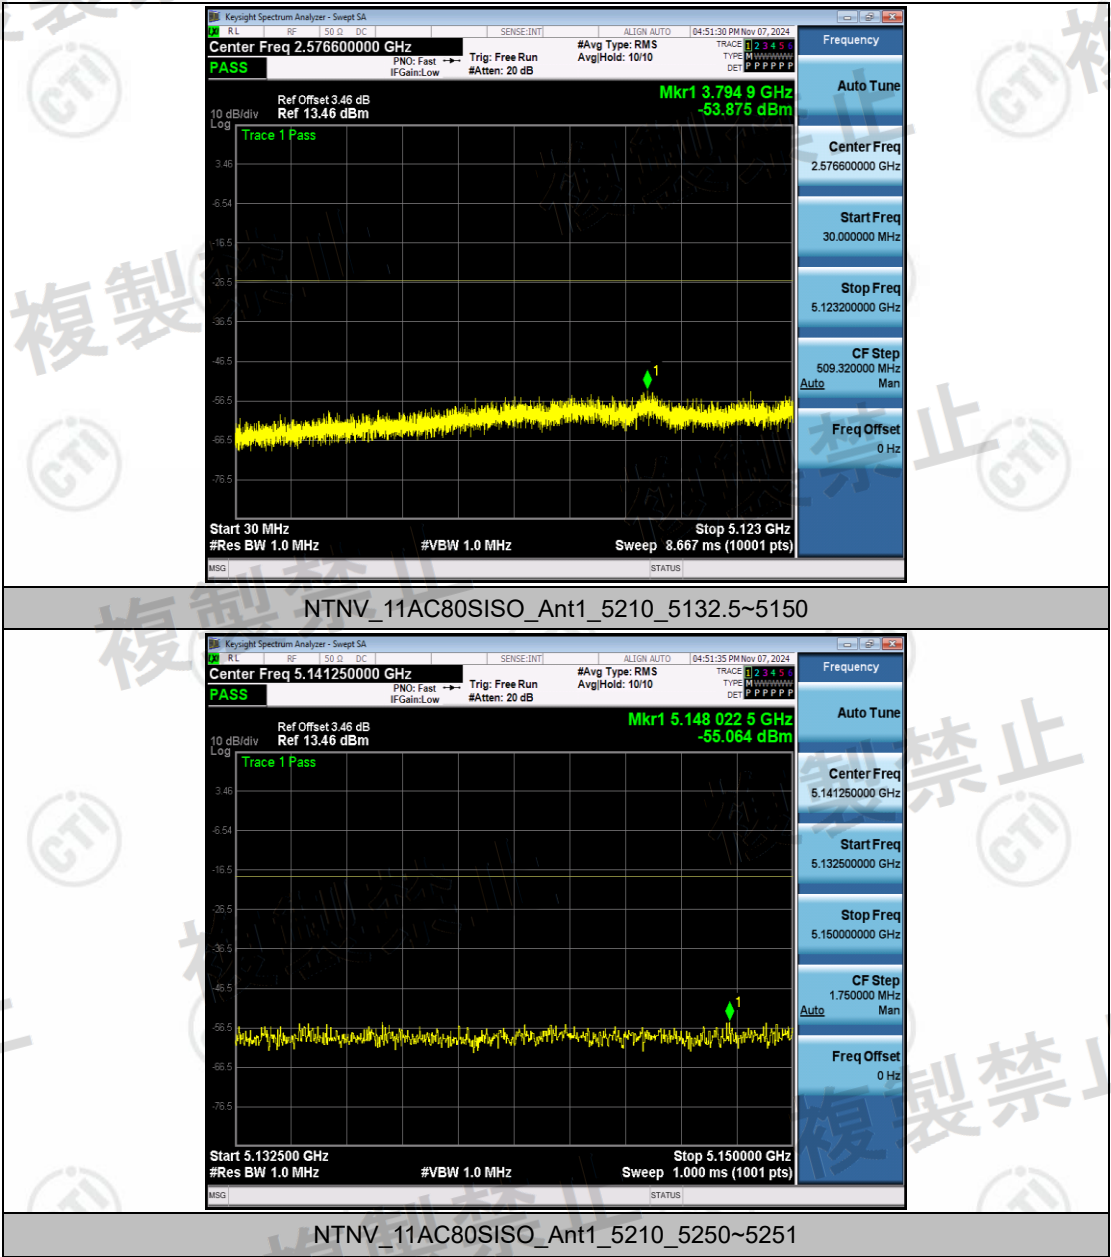

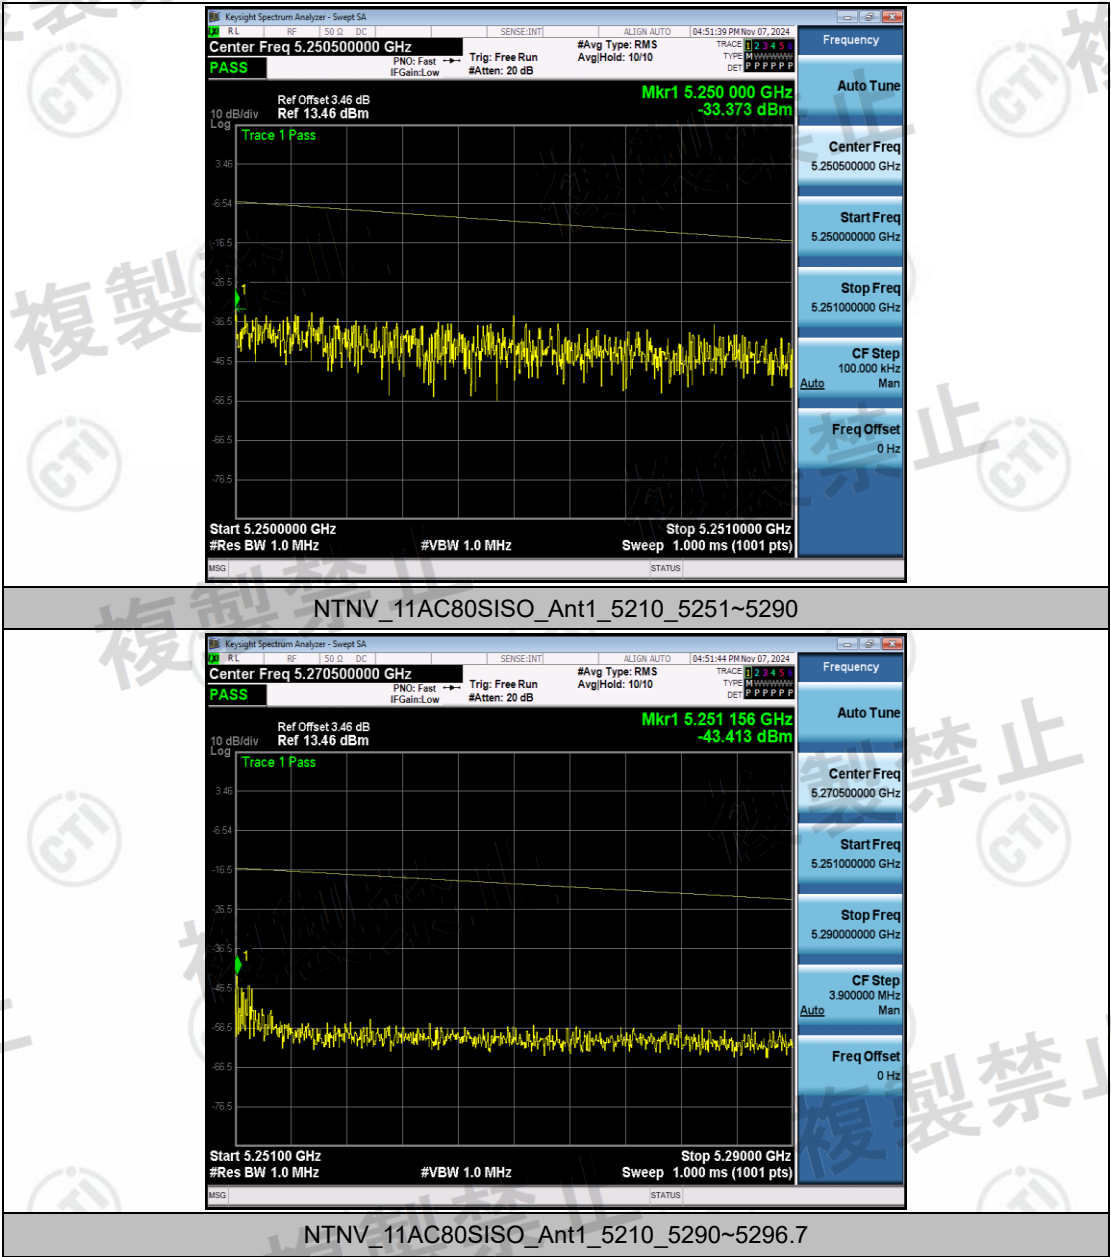


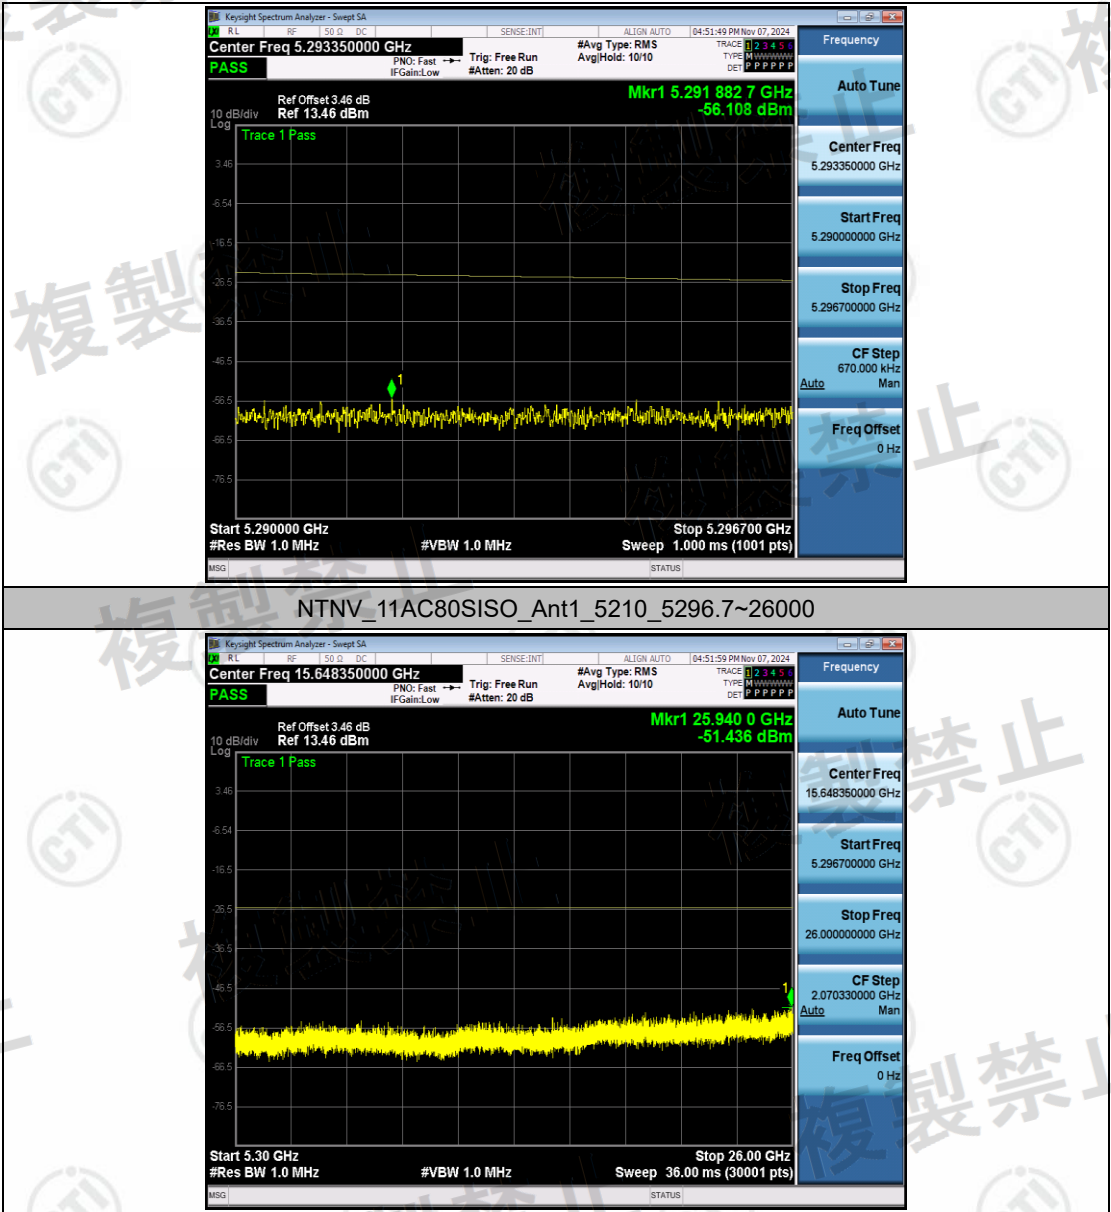



Spurious Emission of RX


TestCondition	TestMode	Antenna	Frequency[MHz]	Freq.Range [MHz]	Result [MHz]	Result [dBm]	Result [nW]	Limit [nW]	Verdict
NTNV	11A	Ant1	5180	30~1000	960.72	-89.73	0.00106	≤4	PASS
NTNV	11A	Ant1	5180	1000~26000	25768.75	-72.28	0.05916	≤20	PASS
NTNV	11A	Ant1	5200	30~1000	556.23	-90.26	0.00094	≤4	PASS
NTNV	11A	Ant1	5200	1000~26000	25926.25	-71.40	0.07244	≤20	PASS
NTNV	11A	Ant1	5240	30~1000	907.37	-90.29	0.00094	≤4	PASS
NTNV	11A	Ant1	5240	1000~26000	25992.50	-72.30	0.05888	≤20	PASS
NTNV	11N20SI SO	Ant1	5180	30~1000	850.62	-88.78	0.00132	≤4	PASS
NTNV	11N20SI SO	Ant1	5180	1000~26000	25011.25	-71.86	0.06516	≤20	PASS
NTNV	11N20SI SO	Ant1	5200	30~1000	935.50	-90.85	0.00082	≤4	PASS
NTNV	11N20SI SO	Ant1	5200	1000~26000	24075.00	-71.10	0.07762	≤20	PASS
NTNV	11N20SI SO	Ant1	5240	30~1000	781.75	-91.00	0.00079	≤4	PASS
NTNV	11N20SI SO	Ant1	5240	1000~26000	25257.50	-71.89	0.06471	≤20	PASS
NTNV	11N40SI SO	Ant1	5190	30~1000	909.79	-88.69	0.00135	≤4	PASS
NTNV	11N40SI SO	Ant1	5190	1000~26000	25513.75	-72.13	0.06124	≤20	PASS
NTNV	11N40SI SO	Ant1	5230	30~1000	762.84	-91.47	0.00071	≤4	PASS
NTNV	11N40SI SO	Ant1	5230	1000~26000	25683.75	-72.43	0.05715	≤20	PASS
NTNV	11AC20S ISO	Ant1	5180	30~1000	720.64	-89.37	0.00116	≤4	PASS
NTNV	11AC20S ISO	Ant1	5180	1000~26000	25915.00	-71.57	0.06966	≤20	PASS
NTNV	11AC20S	Ant1	5200	30~1000	545.07	-90.00	0.0010	≤4	PASS


	ISO						0		
NTNV	11AC20S ISO	Ant1	5200	1000~26000	25658. 75	-71.79	0.0662 2	≤20	PASS
NTNV	11AC20S ISO	Ant1	5240	30~1000	364.17	-91.72	0.0006 7	≤4	PASS
NTNV	11AC20S ISO	Ant1	5240	1000~26000	19383. 75	-72.60	0.0549 5	≤20	PASS
NTNV	11AC40S ISO	Ant1	5190	30~1000	748.77	-89.74	0.0010 6	≤4	PASS
NTNV	11AC40S ISO	Ant1	5190	1000~26000	25795. 00	-71.77	0.0665 3	≤20	PASS
NTNV	11AC40S ISO	Ant1	5230	30~1000	931.62	-91.09	0.0007 8	≤4	PASS
NTNV	11AC40S ISO	Ant1	5230	1000~26000	25727. 50	-72.31	0.0587 5	≤20	PASS
NTNV	11AC80S ISO	Ant1	5210	30~1000	971.39	-90.78	0.0008 4	≤4	PASS
NTNV	11AC80S ISO	Ant1	5210	1000~26000	25892. 50	-72.32	0.0586 1	≤20	PASS

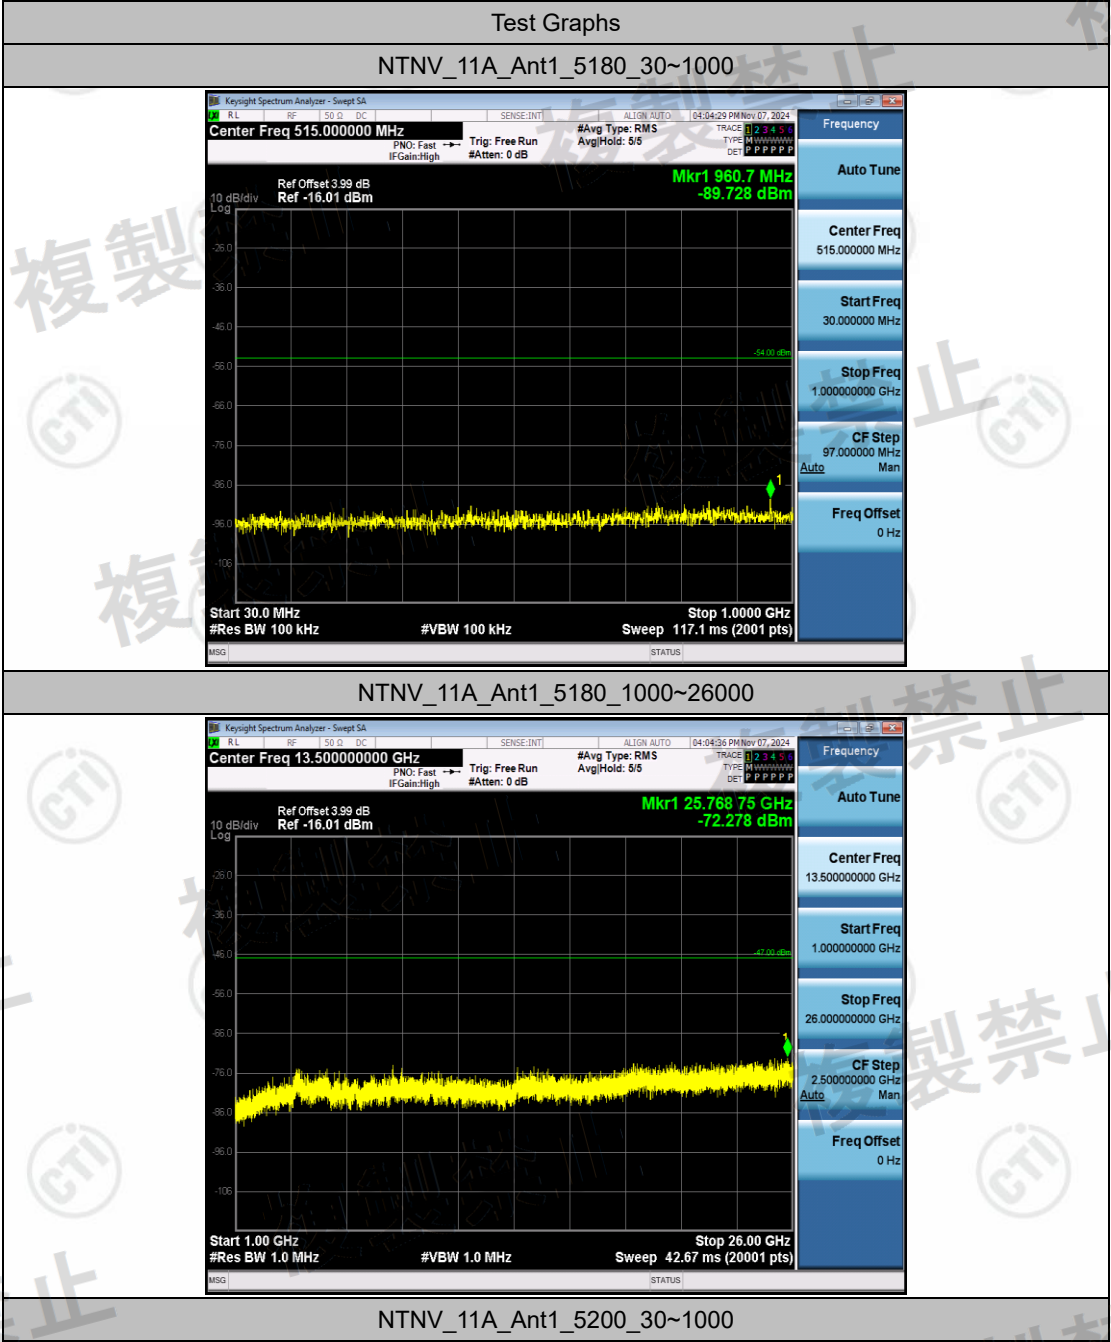


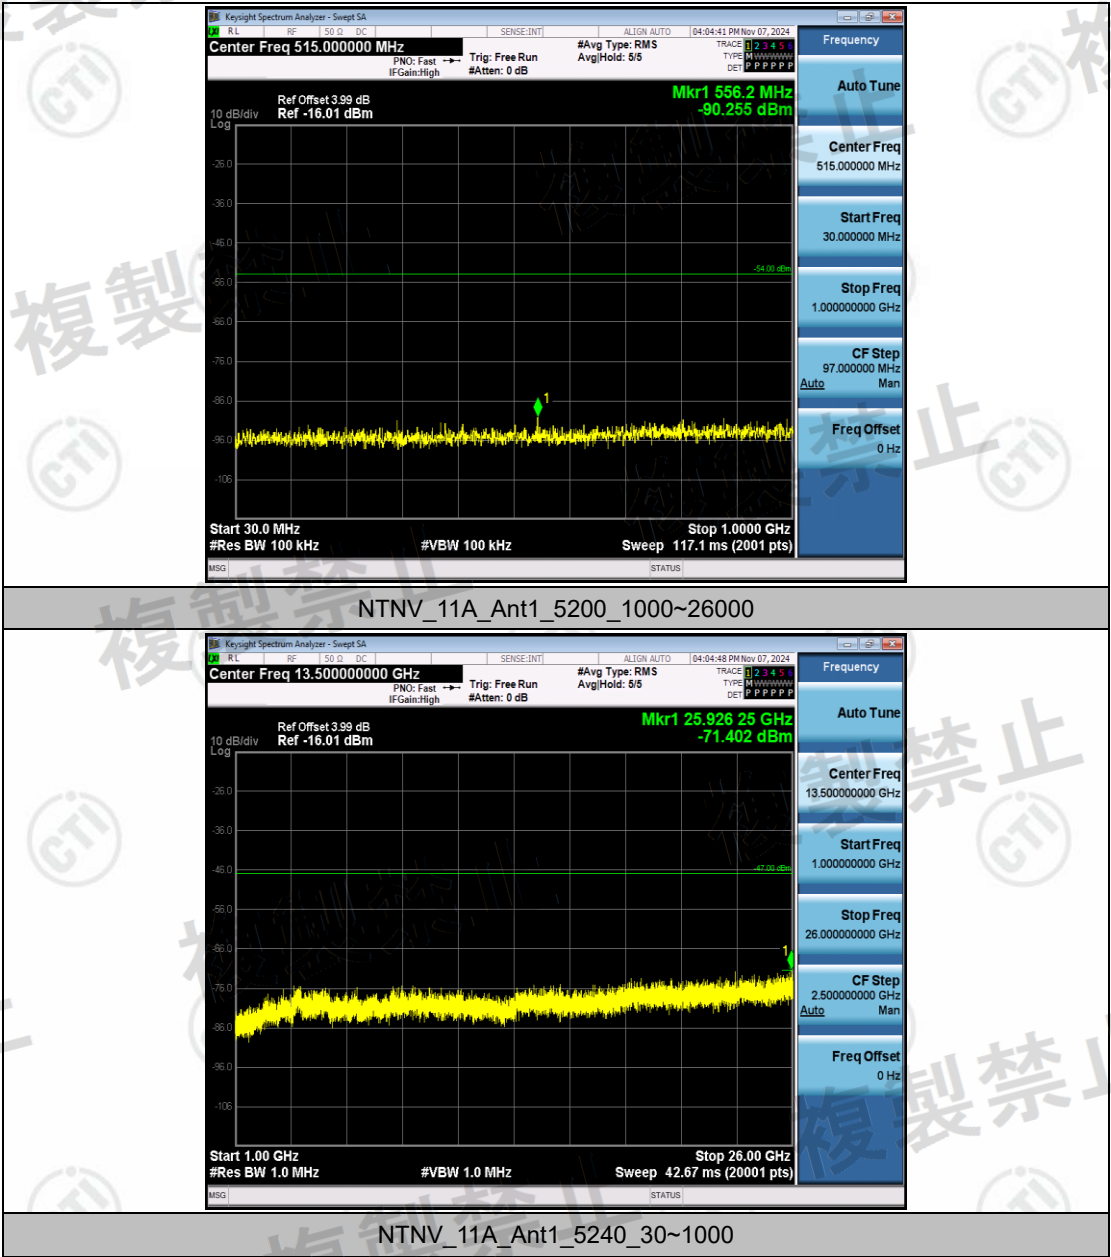


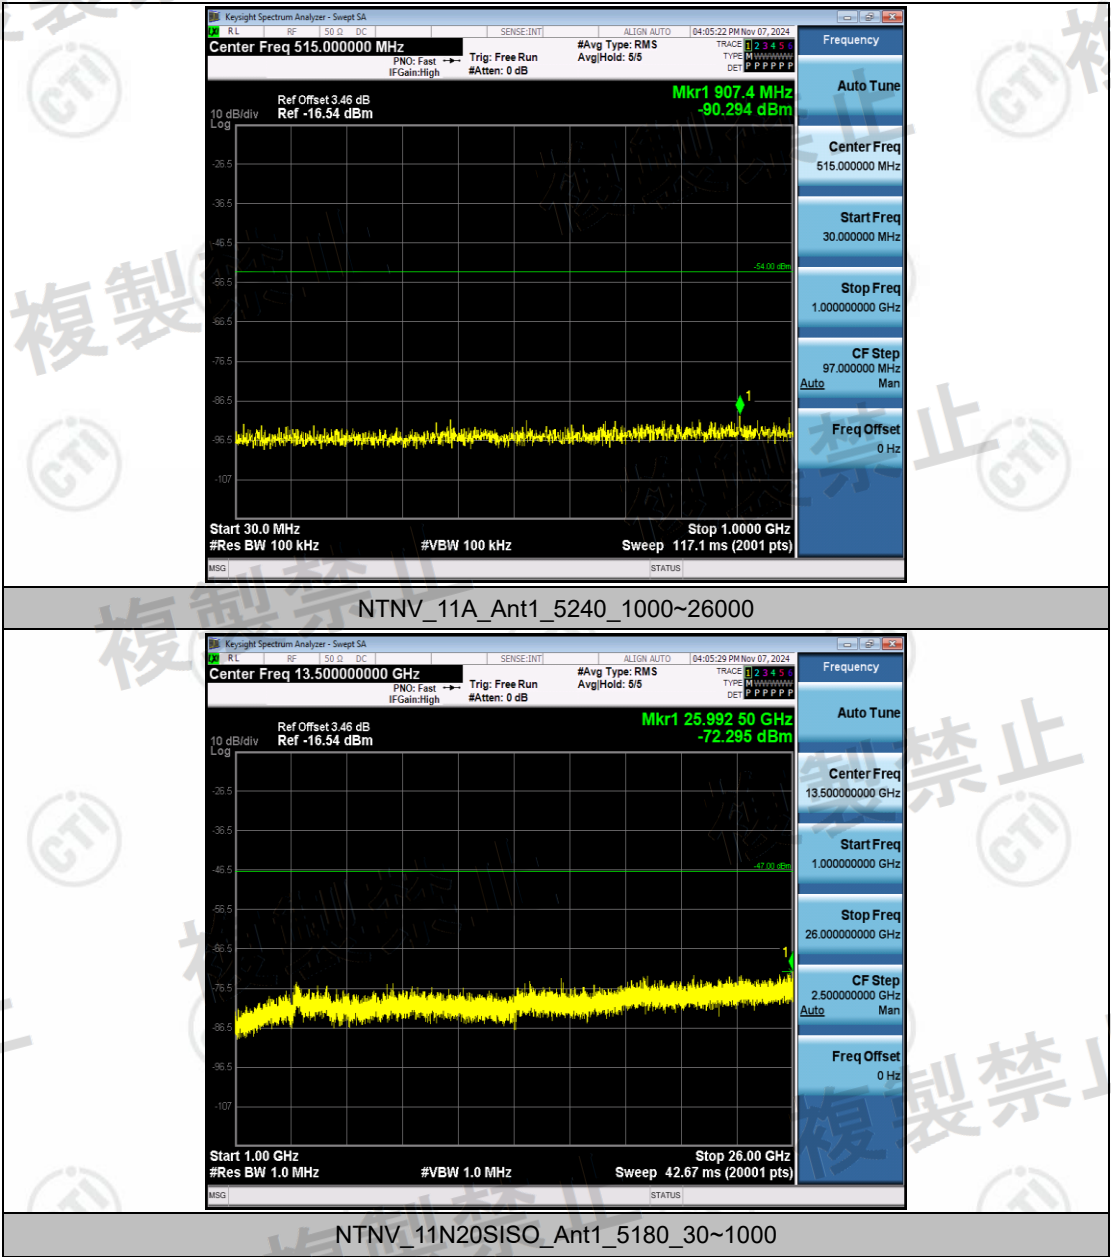


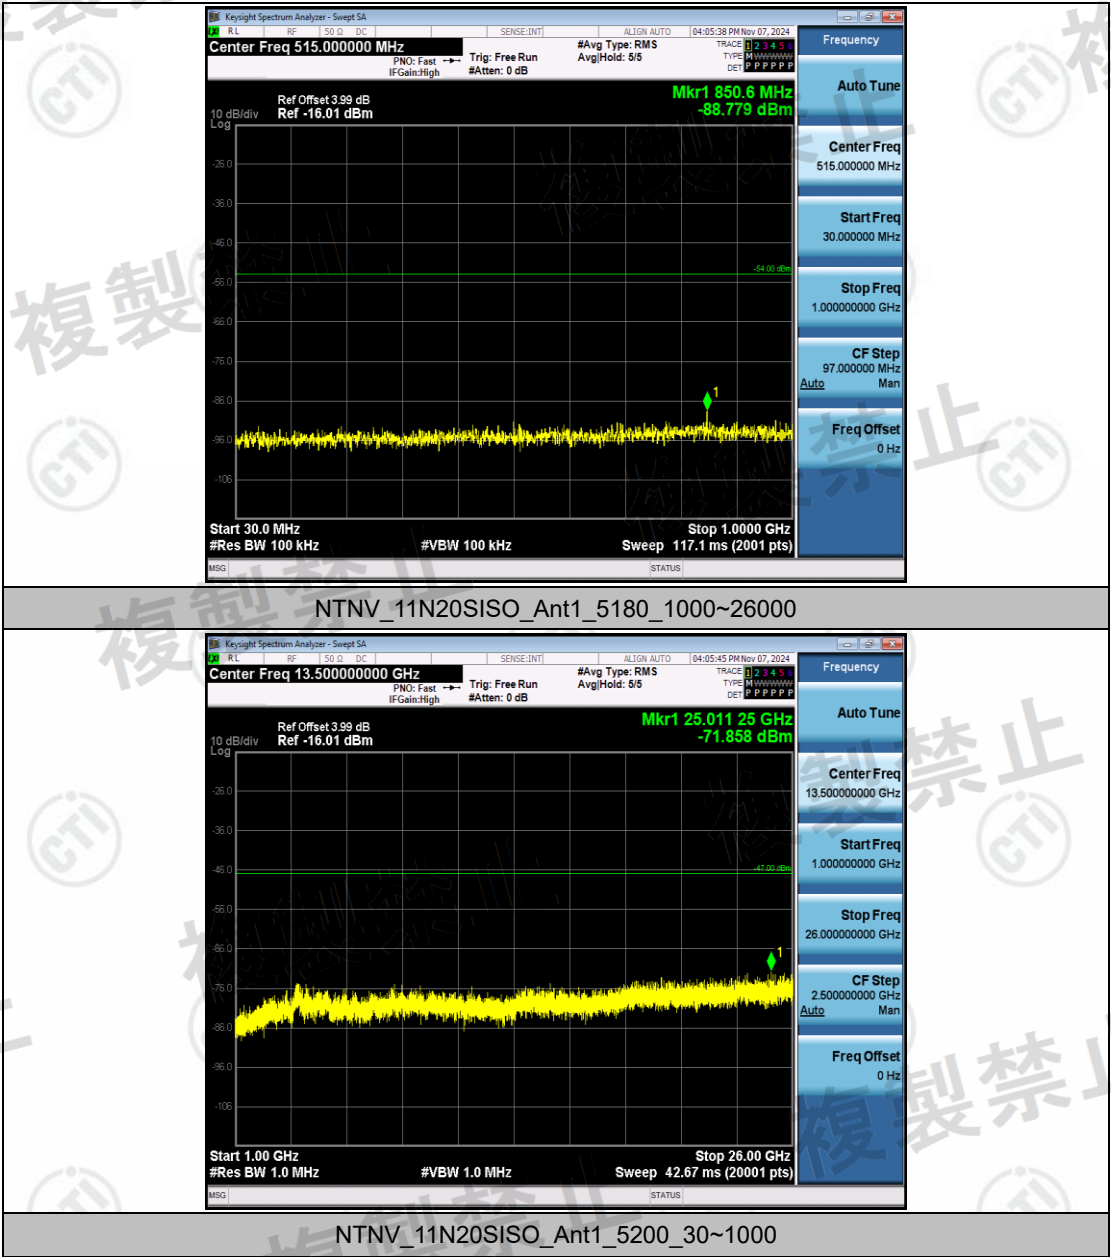


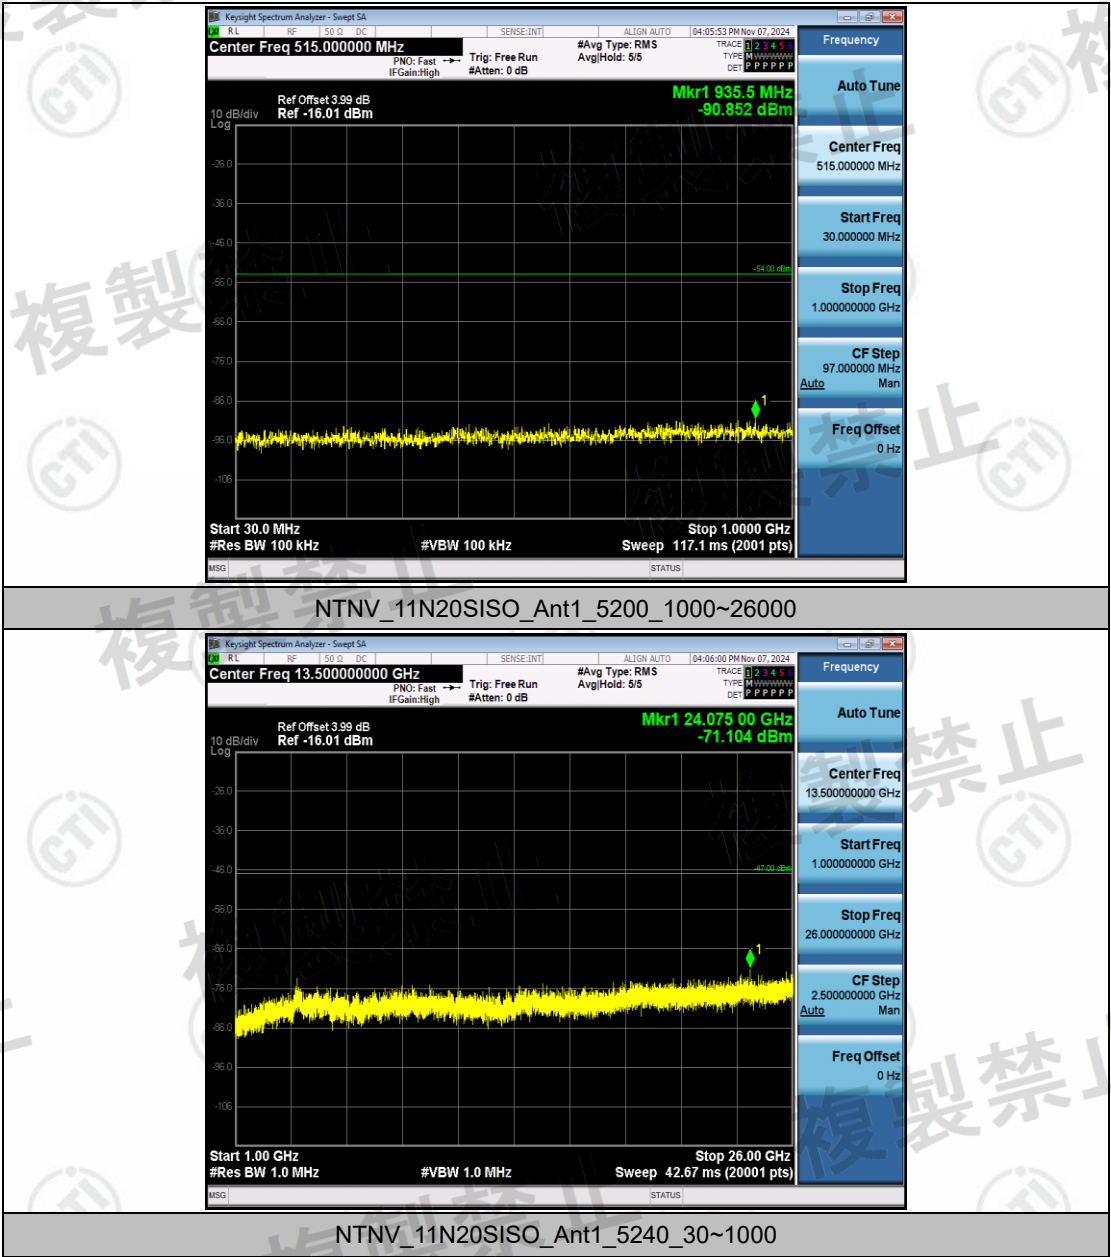


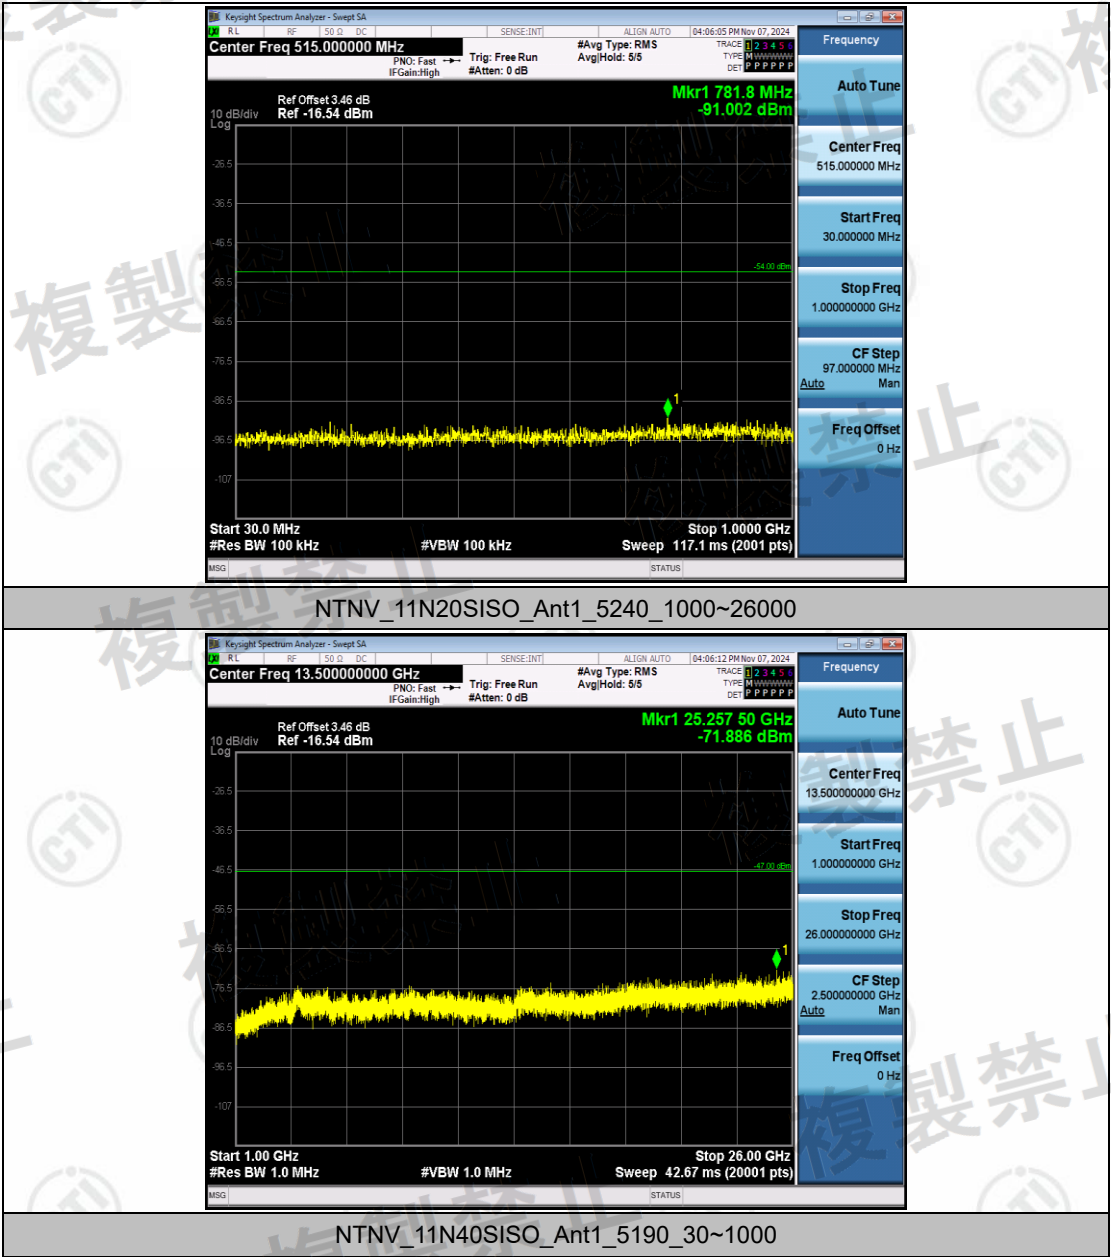


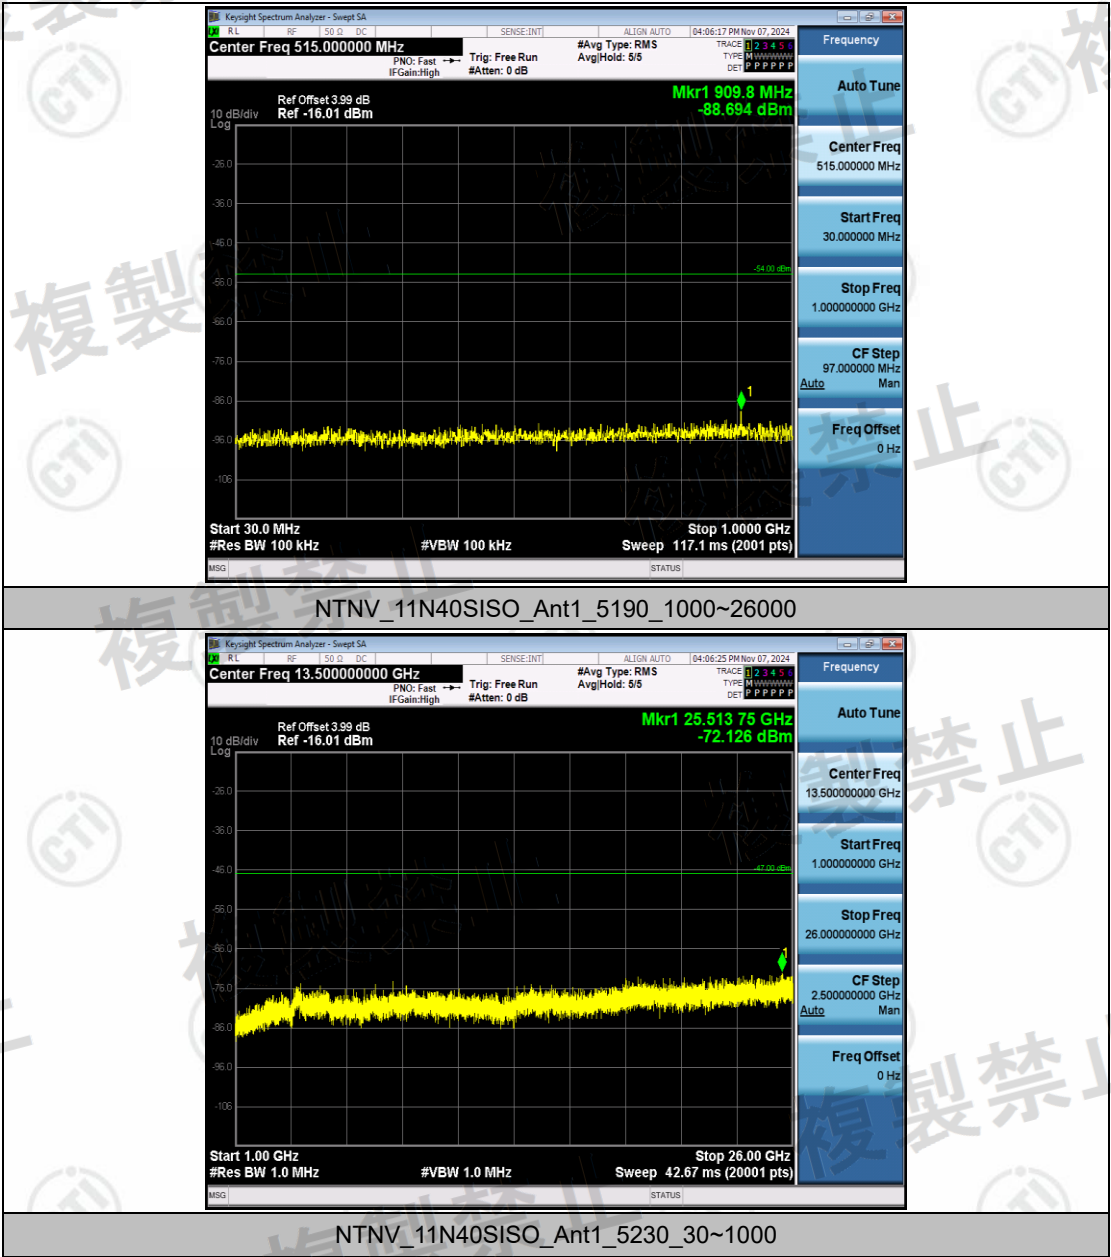


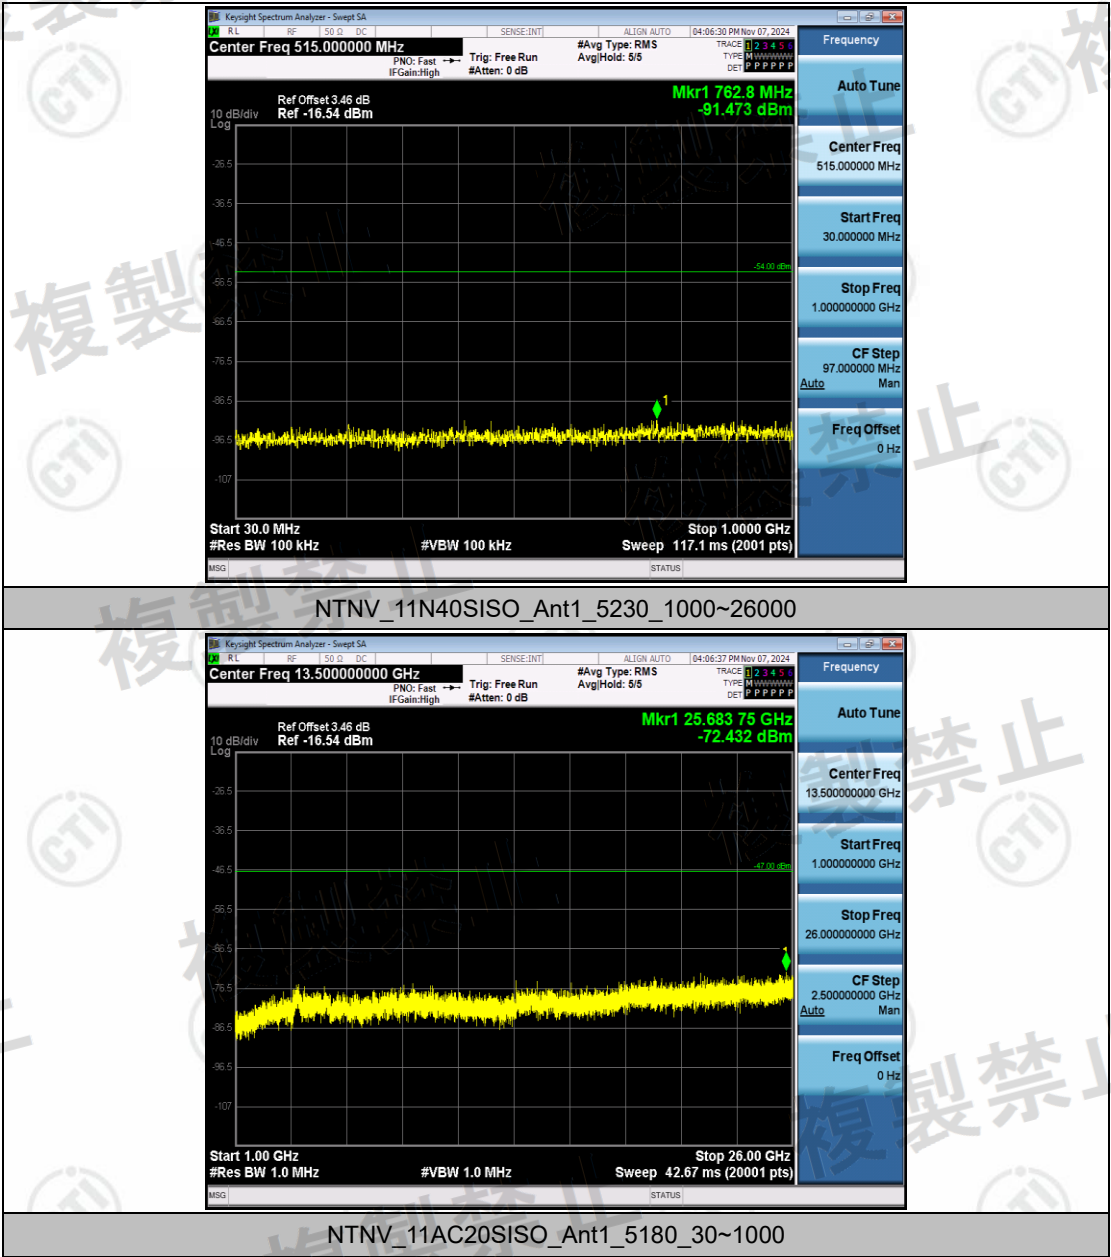


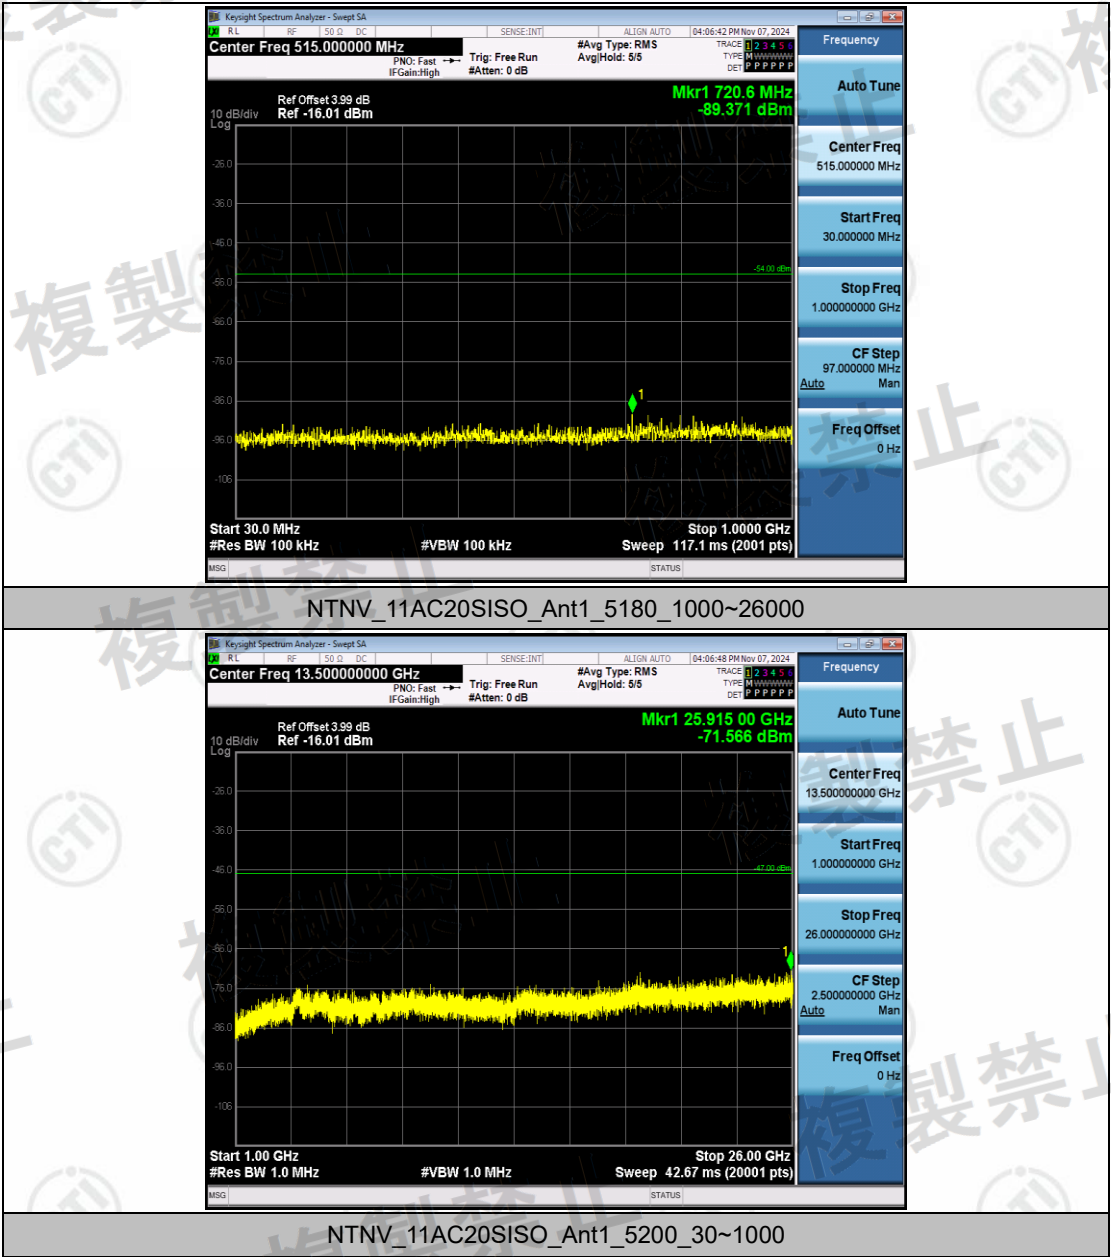


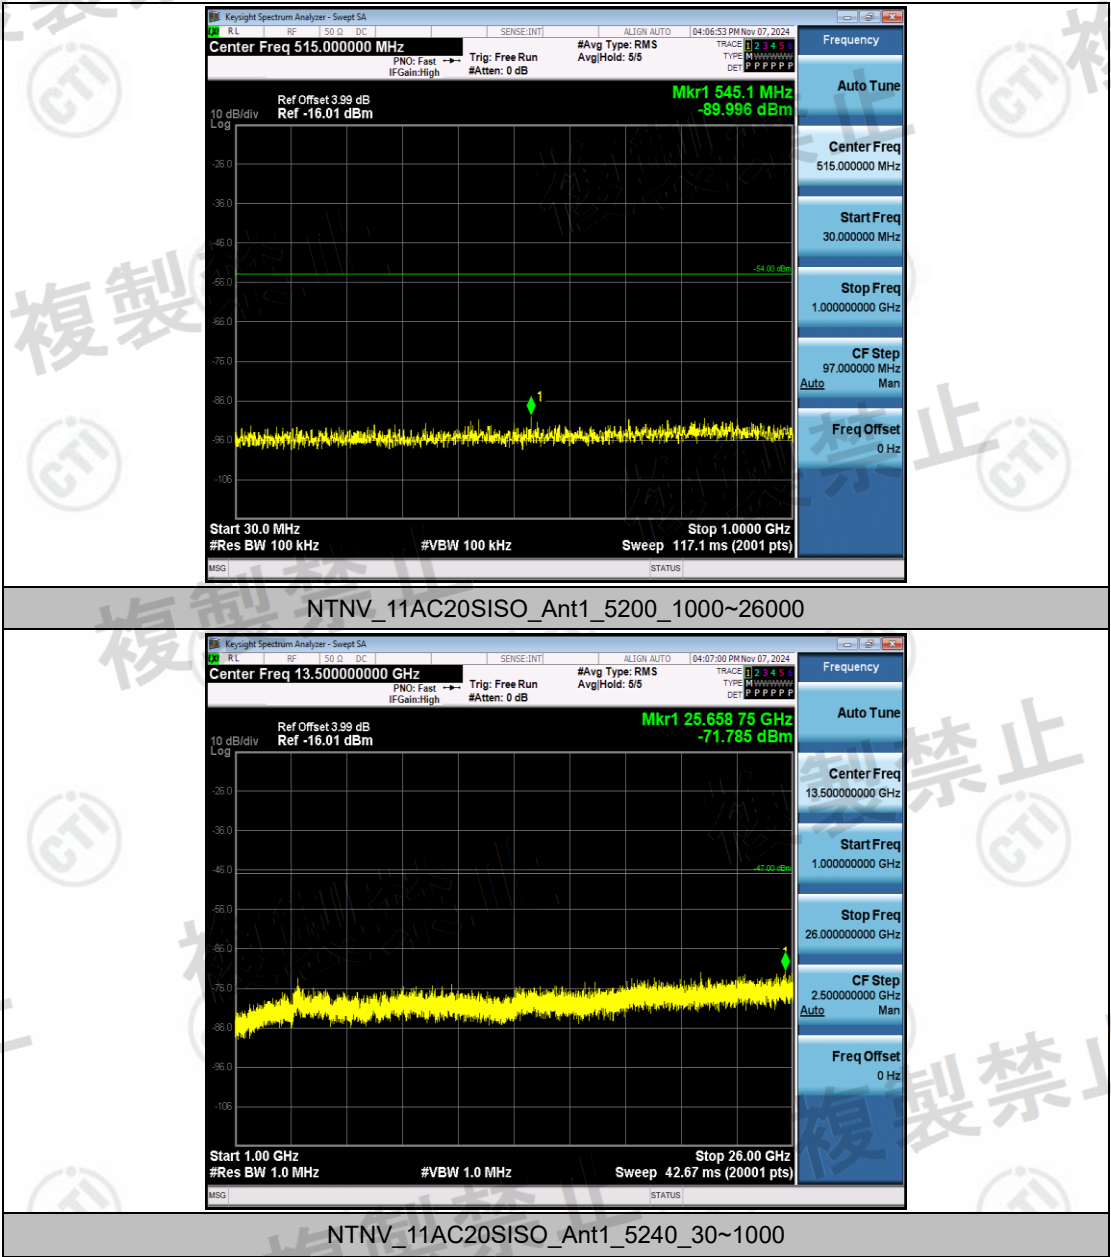

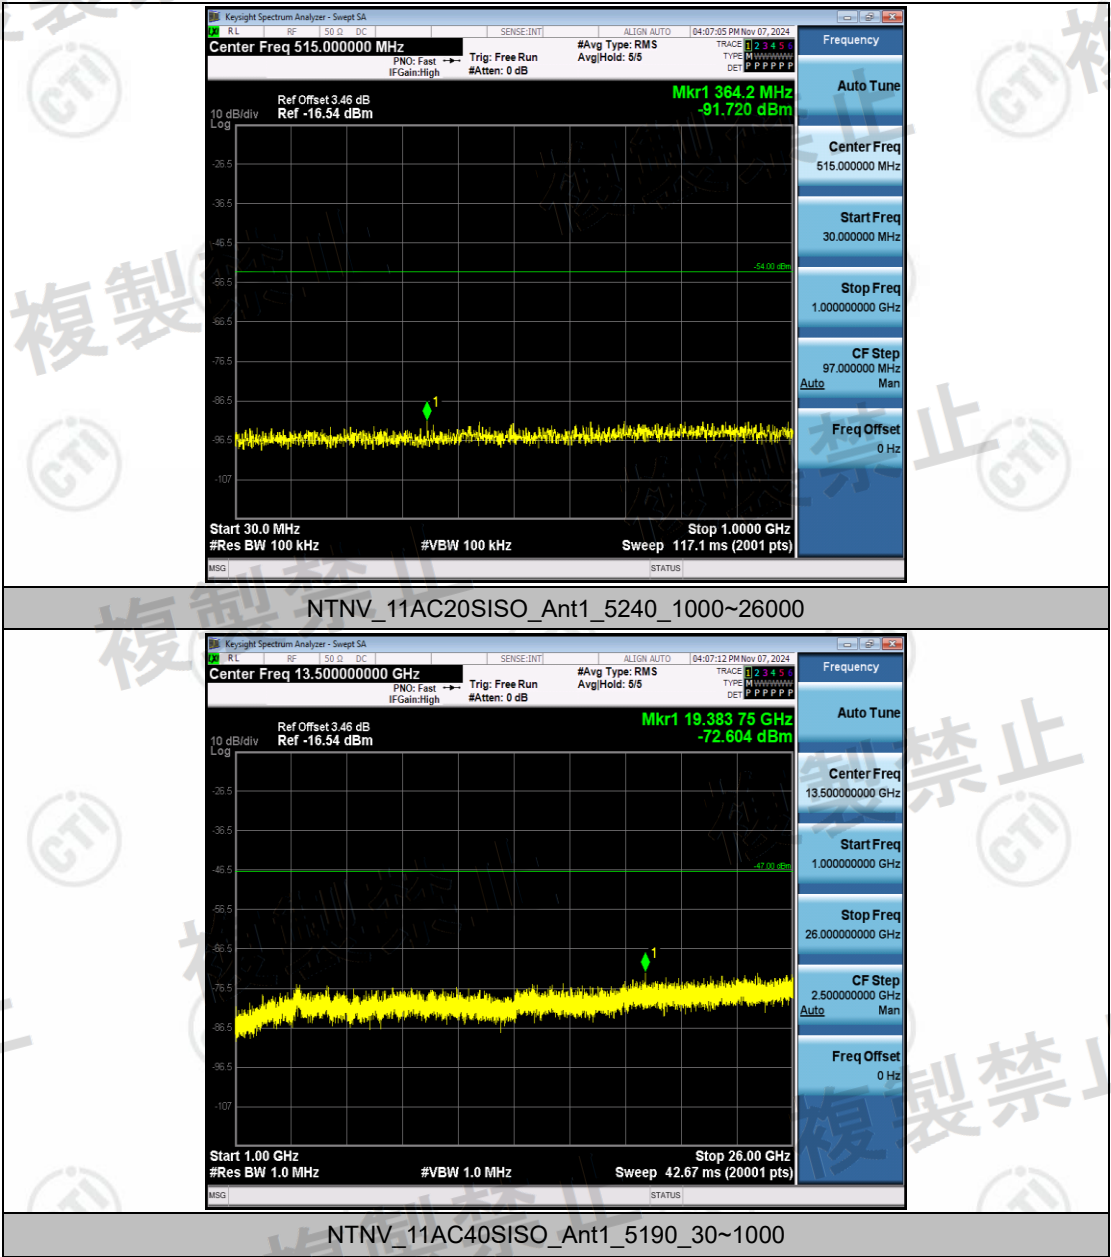


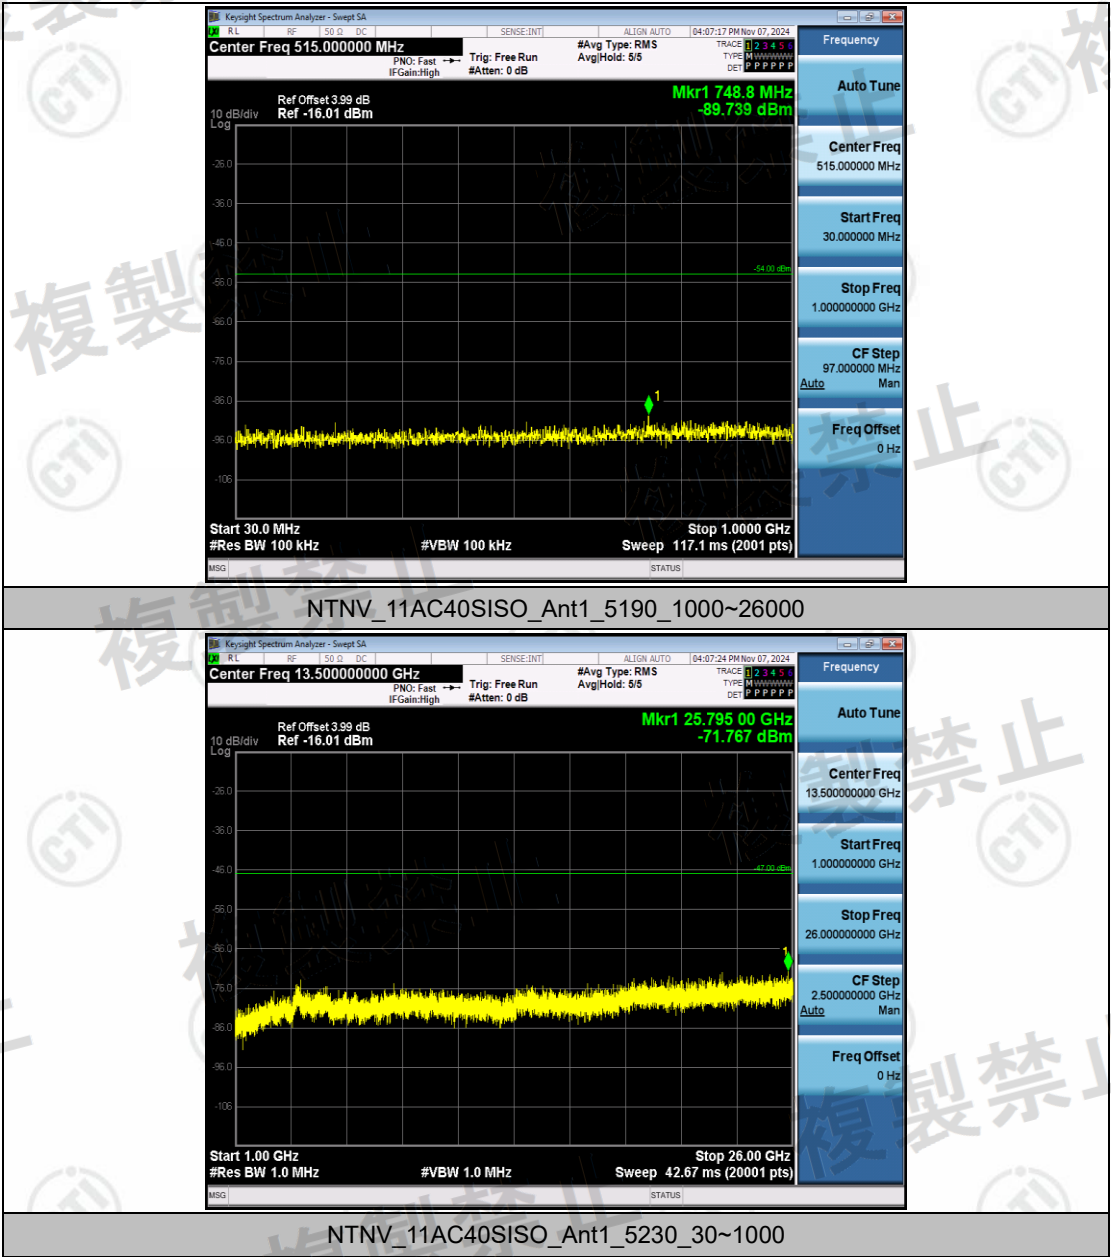


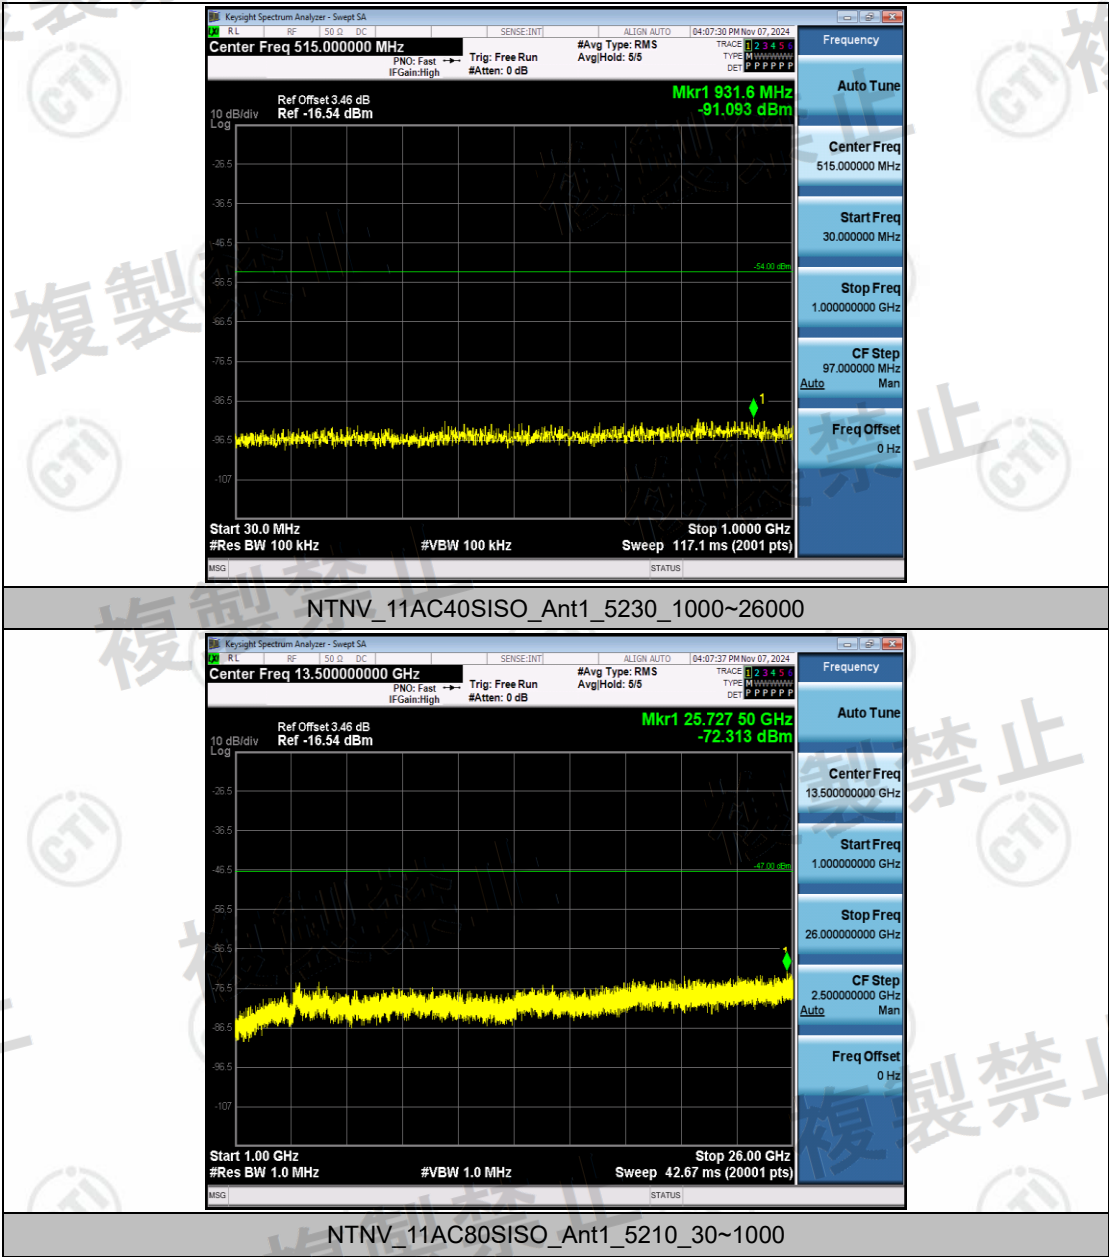


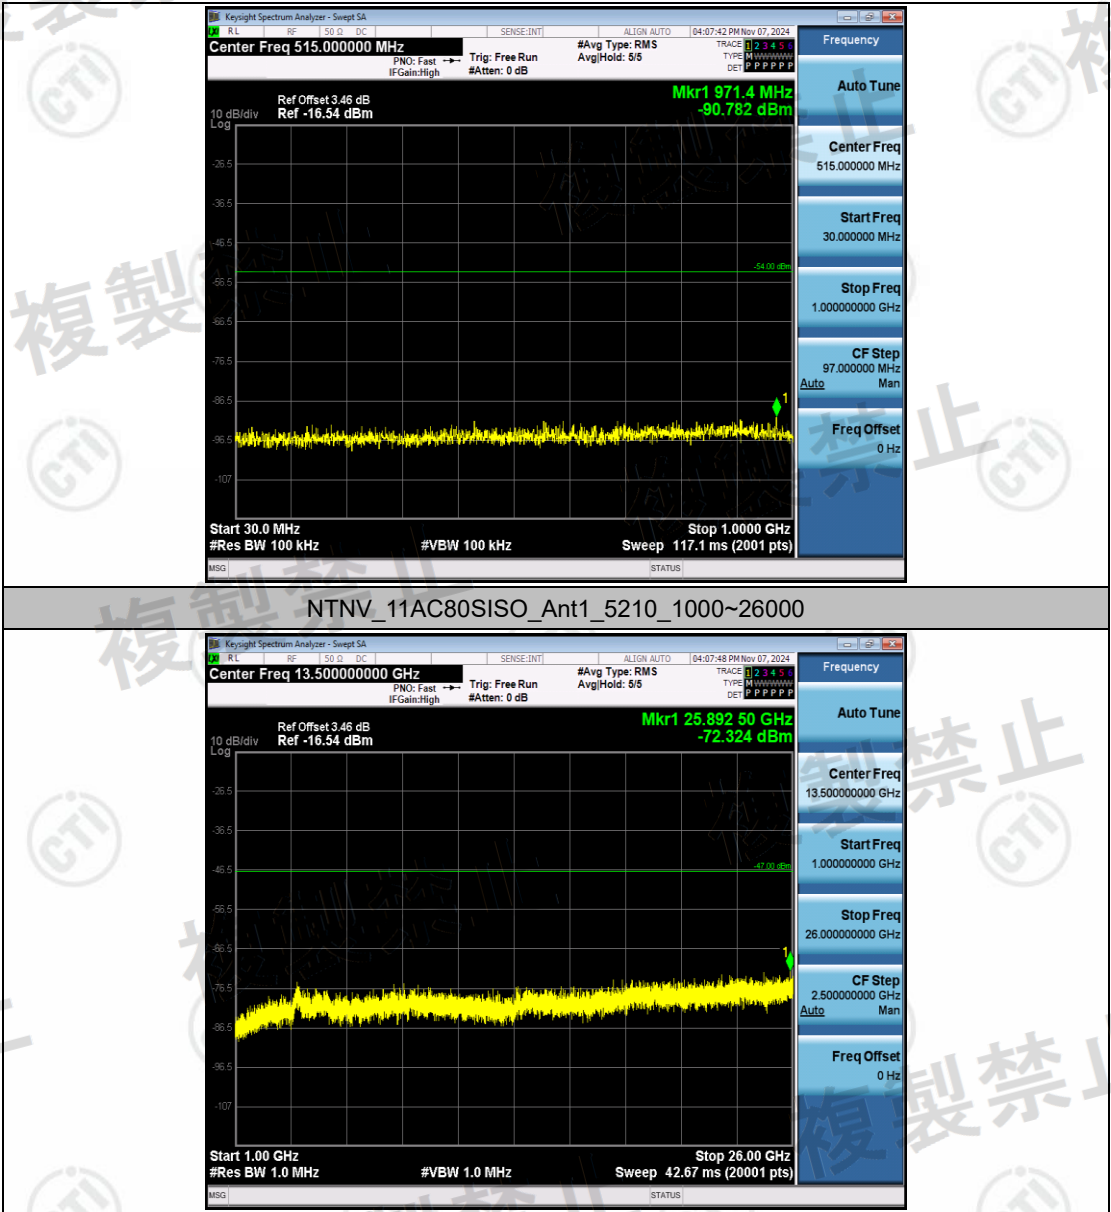


Frequency Error

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	CW	5180	Ant1	5179.992	-8000	-1.54	±20	Pass
NVNT	CW	5190	Ant1	5189.99	-10000	-1.93	±20	Pass
NVNT	CW	5200	Ant1	5199.991	-9000	-1.73	±20	Pass
NVNT	CW	5210	Ant1	5209.996	-4000	-0.77	±20	Pass
NVNT	CW	5230	Ant1	5229.994	-6000	-1.15	±20	Pass
NVNT	CW	5240	Ant1	5239.991	-9000	-1.72	±20	Pass

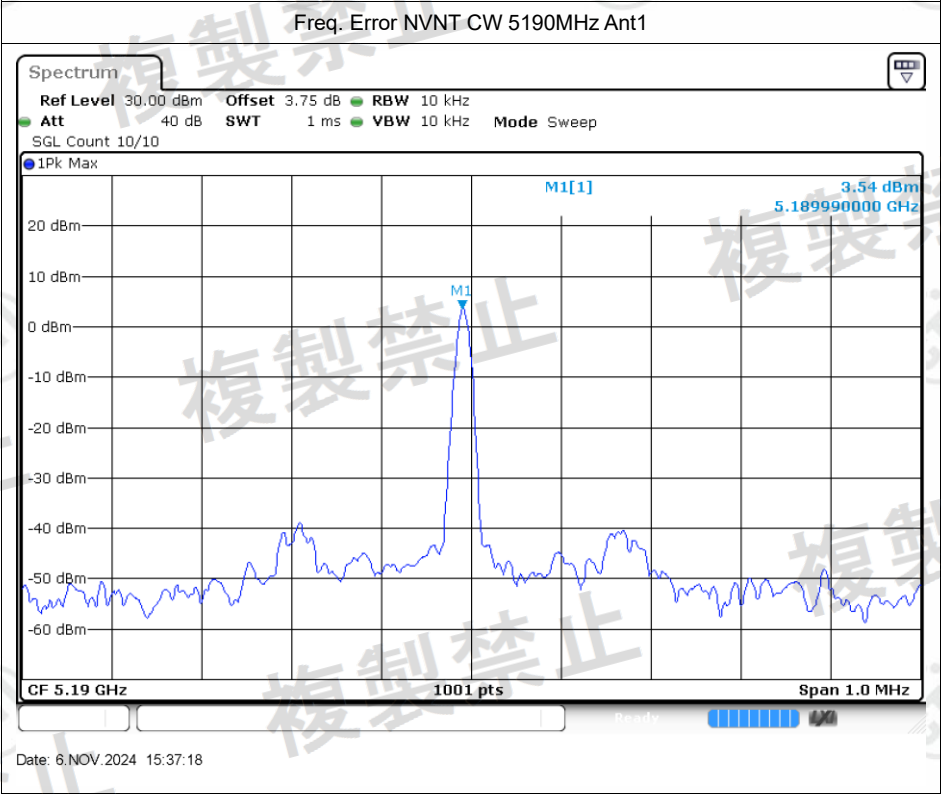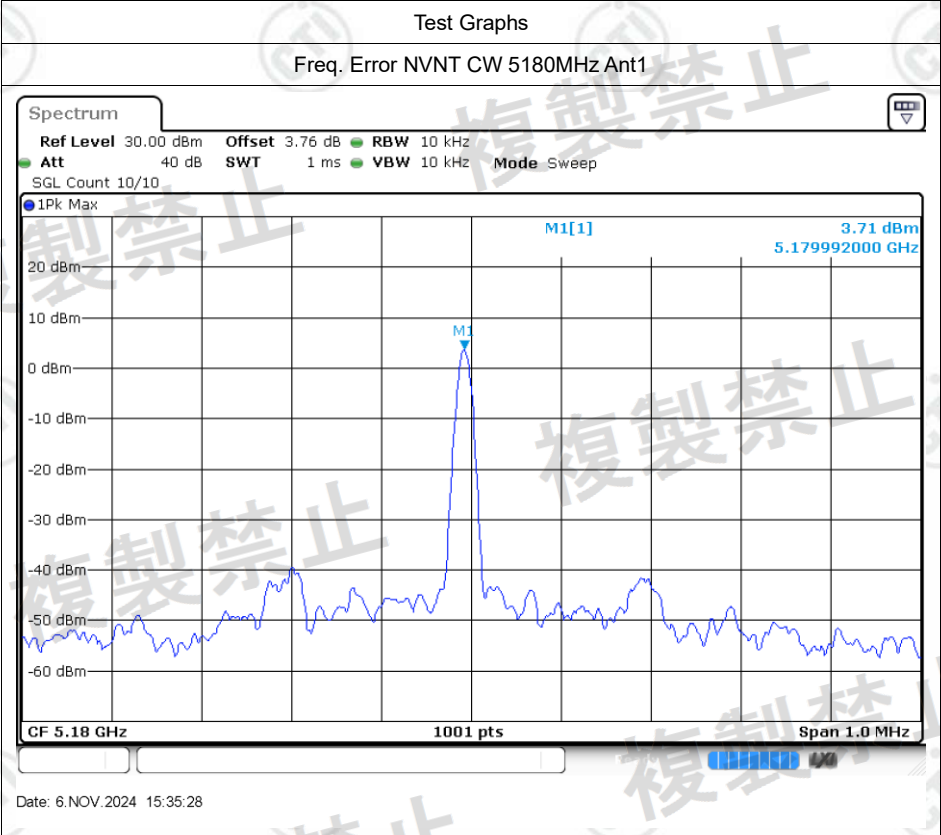


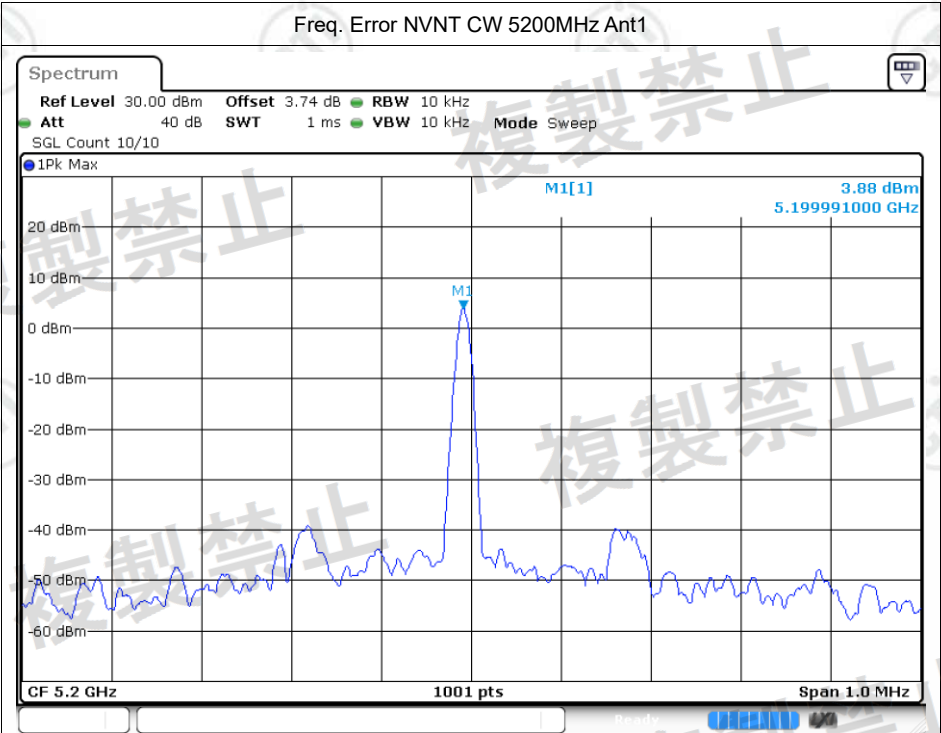


Date: 6.NOV.2024 15:36:13

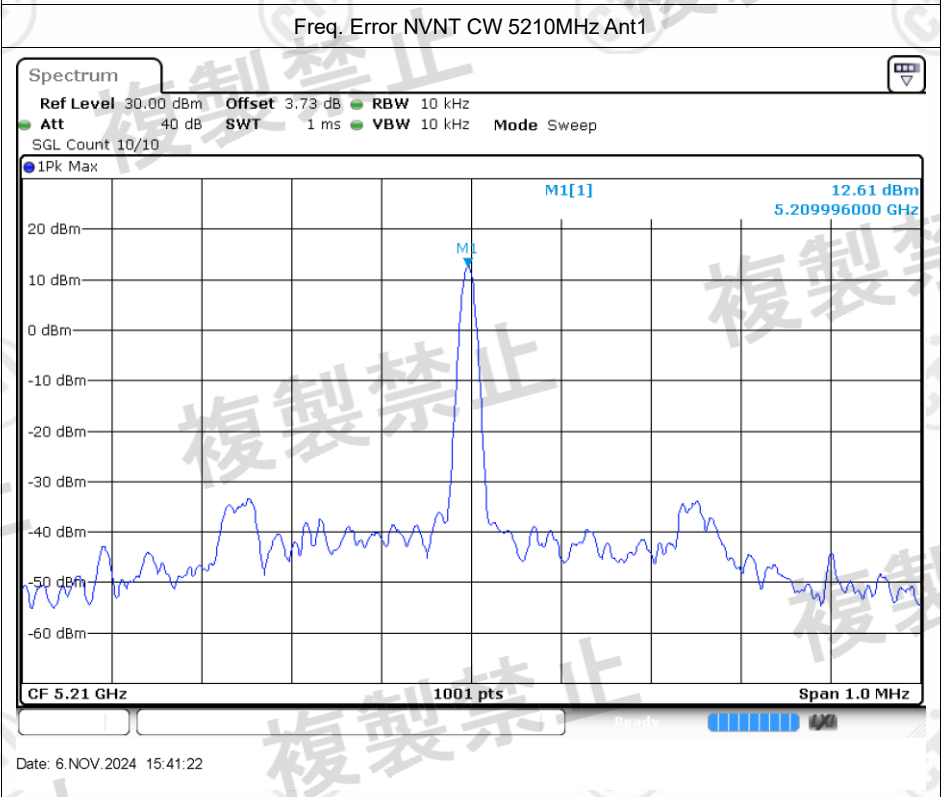

Date: 6.NOV.2024 15:41:22

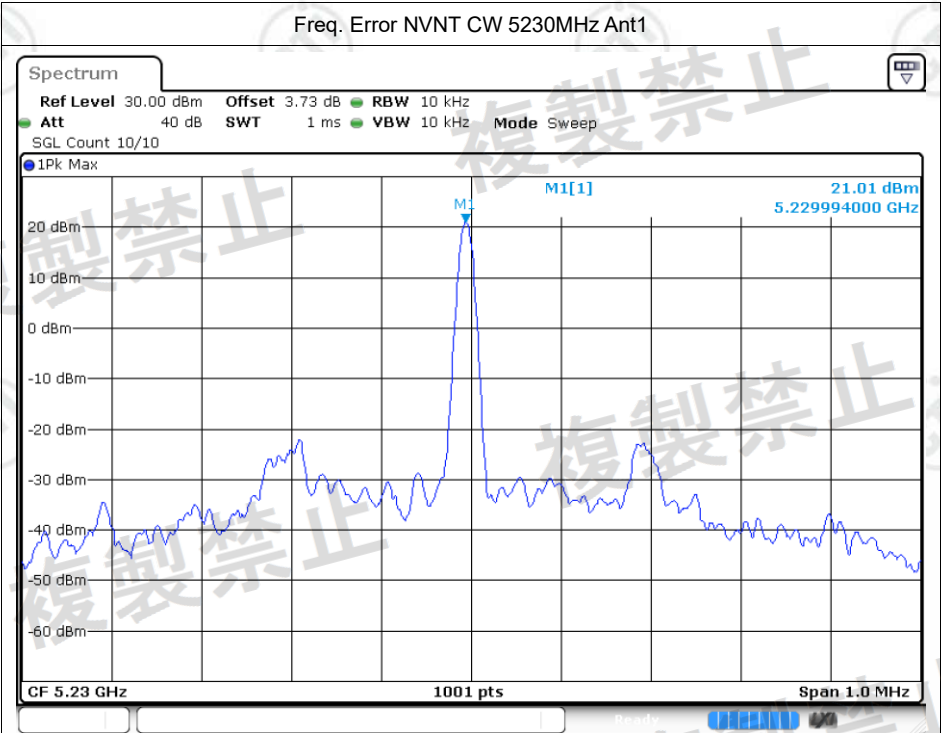

Date: 6.NOV.2024 15:41:39

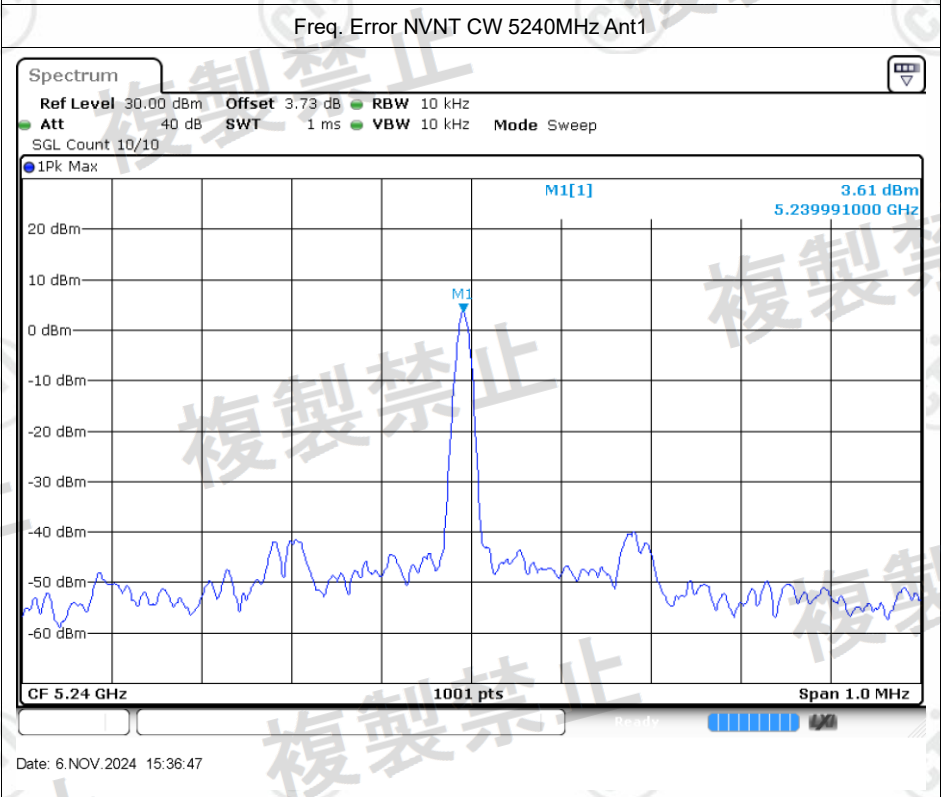

Date: 6.NOV.2024 15:36:47

END OF REPORT