

RF TEST REPORT

For

BEYLESS CO.,LTD.

Product Name: Media box

Test Model(s): URX-05

Report Reference No. : DACE260424001RF004

Applicant's Name : BEYLESS CO.,LTD.

Address : 201-4,40,Yeonam-ro,Buk-gu,Daegu,Republic of Korea

Testing Laboratory : Shenzhen DACE Testing Technology Co., Ltd.

Address : 102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park,
Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen,
Guangdong, China

Test Specification Standard : Article 2-1, Item 19-3

Date of Receipt : April 24, 2026

Date of Test : April 24, 2026 to May 13, 2026

Date of Issue : May 13, 2026

Result : Pass

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen DACE Testing Technology Co., Ltd. This document may be altered or revised by Shenzhen DACE Testing Technology Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample

Apply for company information

Applicant's Name	:	BEYLESS CO.,LTD.
Address	:	201-4,40,Yeonam-ro,Buk-gu,Daegu,Republic of Korea
Product Name	:	Media box
Test Model(s)	:	URX-05
Series Model(s)	:	N/A
Test Specification Standard(s)	:	Article 2-1, Item 19-3

NOTE1:

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

Compiled by:

Lucy Mo

Lucy Mo / Test Engineer

May 13, 2026

Supervised by:

Ben Tang

Ben Tang / Project Engineer

May 13, 2026

Approved by:

Machael Mo

Machael Mo / Manager

May 13, 2026

Revision History Of Report

Version	Description	REPORT No.	Issue Date
V1.0	Original	DACE260424001RF004	May 13, 2026

CONTENTS

1 TEST SUMMARY	6
1.1 TEST STANDARDS	6
1.2 SUMMARY OF TEST RESULT	6
1.3 TEST ENVIRONMENTAL CONDITIONS	7
2 GENERAL INFORMATION	8
2.1 CLIENT INFORMATION	8
2.2 DESCRIPTION OF DEVICE (EUT)	8
2.3 DESCRIPTION OF TEST MODES	8
2.4 DESCRIPTION OF SUPPORT UNITS	9
2.5 EQUIPMENTS USED DURING THE TEST	10
2.6 STATEMENT OF THE MEASUREMENT UNCERTAINTY	11
2.7 IDENTIFICATION OF TESTING LABORATORY	11
2.8 ANNOUNCEMENT	11
3 EVALUATION RESULTS (EVALUATION)	12
3.1 INTERFERENCE PREVENTION FUNCTION	12
3.1.1 Conclusion:	12
4 RADIO SPECTRUM MATTER TEST RESULTS (RF)	13
4.1 TOLERANCE OF FREQUENCY	13
4.1.1 E.U.T. Operation:	13
4.1.2 Test Setup Diagram:	13
4.1.3 Test Data:	13
4.2 OCCUPIED BANDWIDTH (99%)	14
4.2.1 E.U.T. Operation:	14
4.2.2 Test Setup Diagram:	15
4.2.3 Test Data:	15
4.3 ANTENNA POWER AND TOLERANCE	16
4.3.1 E.U.T. Operation:	16
4.3.2 Test Setup Diagram:	17
4.3.3 Test Data:	17
4.4 OUT OF BAND EMISSION	18
4.4.1 E.U.T. Operation:	19
4.4.2 Test Setup Diagram:	20
4.4.3 Test Data:	20
4.5 ADJACENT CHANNEL EMITTED POWER	21
4.5.1 E.U.T. Operation:	22
4.5.2 Test Setup Diagram:	22
4.5.3 Test Data:	22
4.6 SPURIOUS EMISSION INTENSITY	23
4.6.1 E.U.T. Operation:	24
4.6.2 Test Setup Diagram:	25
4.6.3 Test Data:	25
4.7 SECONDARY RADIATED EMISSIONS	26
4.7.1 E.U.T. Operation:	26
4.7.2 Test Setup Diagram:	27
4.7.3 Test Data:	27
4.8 CARRIER SENSING 1	28
4.8.1 E.U.T. Operation:	28

4.8.2 Test Setup Diagram:	29
4.8.3 Test Data:	29
4.9 TRANSMISSION BURST LENGTH	30
4.9.1 E.U.T. Operation:	30
4.9.2 Test Setup Diagram:	30
4.9.3 Test Data:	30
5 TEST SETUP PHOTOS	31
6 PHOTOS OF THE EUT	32
APPENDIX-5.2G	41
1. OCCUPIED FREQUENCY BANDWIDTH	42
2. SPREAD SPECTRUM BANDWIDTH	50
3. BURST LENGTH	58
4. RF OUTPUT POWER & E.I.R.P(WITHOUT TPC)	66
5. SPURIOUS EMISSIONS	67
6. ACP MEASURE	86
7. FREQUENCY TOLERANCE	94
8. SECONDARY EMISSION OF RADIO WAVE	99
APPENDIX-5.3G	108
1. OCCUPIED FREQUENCY BANDWIDTH	109
2. SPREAD SPECTRUM BANDWIDTH	117
3. BURST LENGTH	125
4. RF OUTPUT POWER & E.I.R.P(WITHOUT TPC)	133
5. SPURIOUS EMISSIONS	134
6. ACP MEASURE	154
7. FREQUENCY TOLERANCE	162
8. SECONDARY EMISSION OF RADIO WAVE	167
APPENDIX-5.6G	175
1. OCCUPIED FREQUENCY BANDWIDTH	176
2. SPREAD SPECTRUM BANDWIDTH	186
3. BURST LENGTH	196
4. RF OUTPUT POWER & E.I.R.P(WITHOUT TPC)	206
5. SPURIOUS EMISSIONS	207
6. ACP MEASURE	230
7. FREQUENCY TOLERANCE	240
8. SECONDARY EMISSION OF RADIO WAVE	245

1 TEST SUMMARY

1.1 Test Standards

The tests were performed according to following standards:

Article 2-1, Item 19-3 : 5G WIFI

1.2 Summary of Test Result

Item	Standard	Method	Requirement	Result
Tolerance of Frequency	Article 2-1, Item 19-3	Article 2-1, Item 19-3 & 別表第四十五	Article 2-1, Item 19-3	Pass
Occupied Bandwidth (99%)	Article 2-1, Item 19-3	Article 2-1, Item 19-3 & 別表第四十五	Article 2-1, Item 19-3	Pass
Antenna Power and Tolerance	Article 2-1, Item 19-3	Article 2-1, Item 19-3 & 別表第四十五	Article 2-1, Item 19-3	Pass
E.I.R.P	Article 2-1, Item 19-3	Article 2-1, Item 19-3 & 別表第四十五	Article 2-1, Item 19-3	Pass
Out of Band Emission	Article 2-1, Item 19-3	Article 2-1, Item 19-3 & 別表第四十五	Article 2-1, Item 19-3	Pass
Adjacent Channel Emitted Power	Article 2-1, Item 19-3	Article 2-1, Item 19-3 & 別表第四十五	Article 2-1, Item 19-3	Pass
Spurious Emission Intensity	Article 2-1, Item 19-3	Article 2-1, Item 19-3 & 別表第四十五	Article 2-1, Item 19-3	Pass
Secondary Radiated Emissions	Article 2-1, Item 19-3	Article 2-1, Item 19-3 & 別表第四十五	Article 2-1, Item 19-3	Pass
Carrier Sensing 1	Article 2-1, Item 19-3	Article 2-1, Item 19-3 & 別表第四十五	Article 2-1, Item 19-3	Pass
Interference Prevention Function	Article 2-1, Item 19-3	Article 2-1, Item 19-3 & 別表第四十五	Article 2-1, Item 19-3	Pass

Note:1. N/A-- Not applicable to the this test clause.

2. The results of all conduction method tests include cable loss.

1.3 Test Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Power	Temperature	Normal Temperature:	25°C
Type-C port	Voltage	Normal Voltage	DC5.0V
		Low Voltage	DC4.5V
		High Voltage	DC5.5V
	Other	Relative Humidity	55 %
		Air Pressure	101 kPa

When the external power supply voltage is normal Voltage/ low Voltage/ high Voltage, in the RF circuit, monitor the BT chip power supply voltage, the voltage is as follows:

External power supply	module input power	RF chip voltage	Tolerance (%)
AC100V	DC 3.3V	DC 3.3V	0
AC90V	DC 3.3V	DC 3.3V	0
AC110V	DC 3.3V	DC 3.3V	0

Note: The power supply supplies the voltage rating and the voltage rating $\pm 10\%$. However, when it can be confirmed that the change of the input voltage to the wireless part circuit of the testing machine is $\pm 1\%$ or less when the input voltage to the testing machine from the external source changes at $\pm 10\%$, examines it only by the voltage rating.

2 GENERAL INFORMATION

2.1 Client Information

Applicant's Name : BEYLESS CO.,LTD.
Address : 201-4,40,Yeonam-ro,Buk-gu,Daegu,Republic of Korea

Manufacturer : BEYLESS CO.,LTD.
Address : 201-4,40,Yeonam-ro,Buk-gu,Daegu,Republic of Korea

2.2 Description of Device (EUT)

Product Name:	Media box
Model/Type reference:	URX-05
Series Model:	N/A
Trade Mark:	USEN
Power Supply:	DC 5V/3A from adapter
Operation Frequency:	802.11a/n(HT20)/ac(HT20): NII Band 1: 5180MHz to 5240MHz; U-NII Band 2A: 5260MHz to 5320MHz; U-NII Band 2C: 5500MHz to 5720MHz; 802.11n(HT40)/ac(HT40): NII Band 1: 5190MHz to 5230MHz; U-NII Band 2A: 5270MHz to 5310MHz; U-NII Band 2C: 5510MHz to 5710MHz; 802.11ac(HT80): U-NII Band 1: 5210MHz; U-NII Band 2A: 5290MHz; U-NII Band 2C: 5530MHz to 5690MHz;
Number of Channels:	802.11a/n(HT20)/ac(HT20): NII Band 1: 4; U-NII Band 2A: 4; U-NII Band 2C: 12; 802.11n(HT40)/ac(HT40): NII Band 1: 2; U-NII Band 2A: 2; U-NII Band 2C: 6; 802.11ac(HT80): NII Band 1: 1; U-NII Band 2A: 1; U-NII Band 2C: 3;
Modulation Type:	802.11a: 6Mbps,9Mbps,12Mbps,18Mbps,24Mbps,36Mbps,48Mbps,54Mbps 802.11n: MCS0,MCS1,MCS2,MCS3,MCS4,MCS5,MCS6,MCS7 802.11ac: MCS0,MCS1,MCS2,MCS3,MCS4,MCS5,MCS6,MCS7,MCS8,MCS9
Antenna Type:	FPC Antenna
Antenna Gain:	2.05dBi
Hardware Version:	V1.0
Software Version:	V1.0

2.3 Description of Test Modes

No	Title	Description
TM1	802.11a mode	Keep the EUT in continuously transmitting at 802.11a mode.
TM2	802.11n(HT20) mode	Keep the EUT in continuously transmitting at 802.11n(HT20) mode.
TM3	802.11n(HT40) mode	Keep the EUT in continuously transmitting at 802.11n(HT40) mode.
TM4	802.11ac(VHT20) mode	Keep the EUT in continuously transmitting at 802.11ac(VHT20) mode.
TM5	802.11ac(VHT40) mode	Keep the EUT in continuously transmitting at 802.11ac(VHT40)

		mode.
TM6	802.11ac(VHT80) mode	Keep the EUT in continuously transmitting at 802.11ac(VHT80) mode.
TM7	Receiving mode (20MHz)	Keep the EUT in receiving mode with 20MHz bandwidth.
TM8	Receiving mode (40MHz)	Keep the EUT in receiving mode with 40MHz bandwidth.
TM9	Receiving mode (80MHz)	Keep the EUT in receiving mode with 80MHz bandwidth.
TM10	Normal mode	Keep the EUT in normal communication with pairing device mode.

2.4 Description of Support Units

Title	Manufacturer	Model No.	Serial No.
PC	HP	TPC-W032-SF	N/A

2.5 Equipments Used During The Test

Antenna Power and Tolerance
Adjacent Channel Emitted Power
Spurious Emission Intensity
Secondary Radiated Emissions
Carrier Sensing 1
Tolerance of Frequency
Occupied Bandwidth (99%)

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RF Test Software	Tachoy Information Technology(she n zhen) Co.,Ltd.	RTS-01	V1.0.0	2026-04-14	2027-04-13
Power divider	MIDEWEST	PWD-2533	SMA-79	2026-04-16	2027-04-15
RF Sensor Unit	Tachoy Information Technology(she n zhen) Co.,Ltd.	TR1029-2	000001	2026-04-14	2027-04-13
Wideband radio communication tester	R&S	CMW500	113410	2026-04-14	2027-04-13
Vector Signal Generator	Keysight	N5181A	MY50143455	2025-12-02	2026-12-01
Signal Generator	Keysight	N5182A	MY48180415	2025-12-02	2026-12-01
Spectrum Analyzer	Keysight	N9020A	MY53420323	2025-12-02	2026-12-01
Power meter	Agilent	E4416	MY48200166	2025-12-06	2026-12-05

Remark.

(a) Calibration conducted by the National institute of information and communications Technology(NICT) in Japan (hereinafter referred to as "NICT") or a designated calibration agency under Article102-18 paragraph in JRL.

(b) Correction conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Act (Act No. 51 of 1992).

(c) Calibration conducted in countries except Japan, which shall be equivalent to the calibration conducted by the NICT or a designated calibration agency under Article 102-18 paragraph (1).

(d) Calibration, etc. conducted by using measuring instruments and other equipment listed in the right column of appended table No. 3, which shall have been given any type of calibration, etc. listed above from (a) to (c).

The calibration corresponds to c described above.

Note: The test equipment is calibrated by GUANGZHOU NEM METROLOGY&TEST TECHNOLOGY CO., LTD., Add: 2/F Building 1, No.176, Hedong Road, Liwan District, Guangzhou, Guangdong, China

2.6 Statement Of The Measurement Uncertainty

Test Item	Measurement Uncertainty
Radio Frequency	$\pm 2 \times 10^{-7}$
Occupied Bandwidth	$\pm 3.63\%$
RF conducted power	$\pm 0.733\text{dB}$
Conducted Spurious emissions	$\pm 1.98\text{dB}$
RF conducted power	$\pm 0.733\text{dB}$
RF power density	$\pm 0.234\%$
Duty cycle	$\pm 3.1\%$
Note: (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

2.7 Identification of Testing Laboratory

Company Name:	Shenzhen DACE Testing Technology Co., Ltd.
Address:	102, Building H1, & 1/F., Building H, Hongfa Science & Technology Park, Tangtou Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Phone Number:	+86-13267178997
Fax Number:	86-755-29113252
FCC Registration Number:	0032847402
Designation Number:	CN1342
Test Firm Registration No.:	778666
A2LA Certificate Number:	6270.01

2.8 Announcement

The product is a Slave device that meets the following two requirements: 1 Chooses the frequency which transmits automatically by the control from a "master station". 2.Transmission and a stop of a radio wave are performed by the control from a "master station"

3 Evaluation Results (Evaluation)

3.1 Interference Prevention Function

Test Requirement:	The EUT shall support one of the following functions: - Automatic identification transmission - Automatic identification reception
Test Method:	Notification No.88 of MIC, 2004
Procedure:	(1) For EUTs capable of automatically transmitting identification data a. Transmit identification data from EUT to Demodulator b. Confirm identification data is correctly received by Demodulator (2) For EUTs capable of automatically receiving identification data a. Transmit identification data from Link Partner to EUT b. Confirm communication link is established c. Link Partner shall respond by transmitting different identification data back to the EUT d. Confirm EUT stops transmitting, or confirm EUT recognizes that the two identification data are different

3.1.1 Conclusion:

The detected ID of the device is below:
01:E9:18:DA:CC:69

Test result: The device meet the requirements
PASS

4 Radio Spectrum Matter Test Results (RF)


4.1 Tolerance of Frequency

Test Requirement:	Article 2-1, Item 19-3		
Test Limit:	± 20ppm		
Test Method:	Center frequency:	Test frequency	
	Span:	1 MHz	
	RBW:	10 kHz	
	VBW:	30 kHz	
	Sweep data points:	1001 or greater	
	Sweep time:	Auto	
	Detector mode:	Positive peak	
	Indication mode:	Max hold	
Procedure:	(1) Find the peak carrier signal and measure its frequency (2) For multiple antenna systems each antenna shall be measured (3) For an EUT with multiple antennas it is permissible to test a single antenna only, provided all the antenna measurement values are expected to be same for either of the following reasons: a) The frequency of all antenna transmissions are phase-synchronized to a common (fundamental) oscillator b) The antenna transmissions share a common clock signal		

4.1.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.8 °C	Humidity:	49 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM8				
Final test mode:	TM8				


4.1.2 Test Setup Diagram:

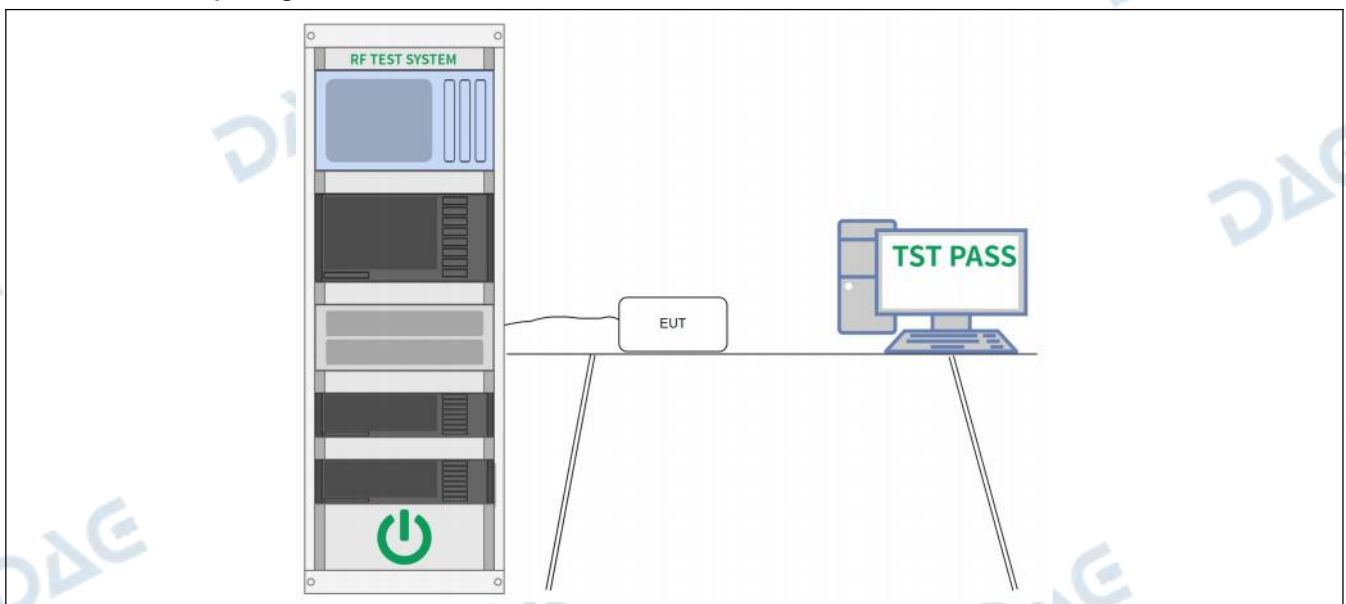

4.1.3 Test Data:

Please Refer to Appendix for Details.


4.2 Occupied Bandwidth (99%)

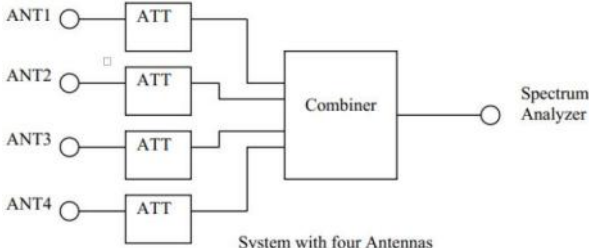Test Requirement:	Article 2-1, Item 19-3	
Test Limit:	DSSS: 18MHz OFDM:20/40/80/160MHz	
Test Method:	[Occupied Bandwidth (99%)]	
	Center Frequency:	Test frequency
	Span:	2 – 3.5 times the technical standard
	RBW:	Within 3% of the technical standard
	VBW:	Same as RBW
	Sweep time:	Auto
	Sweep data points:	1001 or greater
	Detector mode:	Positive peak
	Indication mode:	Max hold
	BW setting:	99%
Procedure:	(1) Measure the signal bandwidth using a spectrum analyzer (2) For multiple antenna systems: a) Each antenna shall be individually measured b) If the measured occupied bandwidth for any antenna exceeds [(Occupied Bandwidth Limit) – 100kHz] then, in addition, the occupied bandwidth shall be measured with all antennas combined – see diagram below:  System with four Antennas	

4.2.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.8 °C	Humidity:	49 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM1, TM2, TM3, TM4, TM5, TM6				
Final test mode:	TM1, TM2, TM3, TM4, TM5, TM6				


4.2.2 Test Setup Diagram:

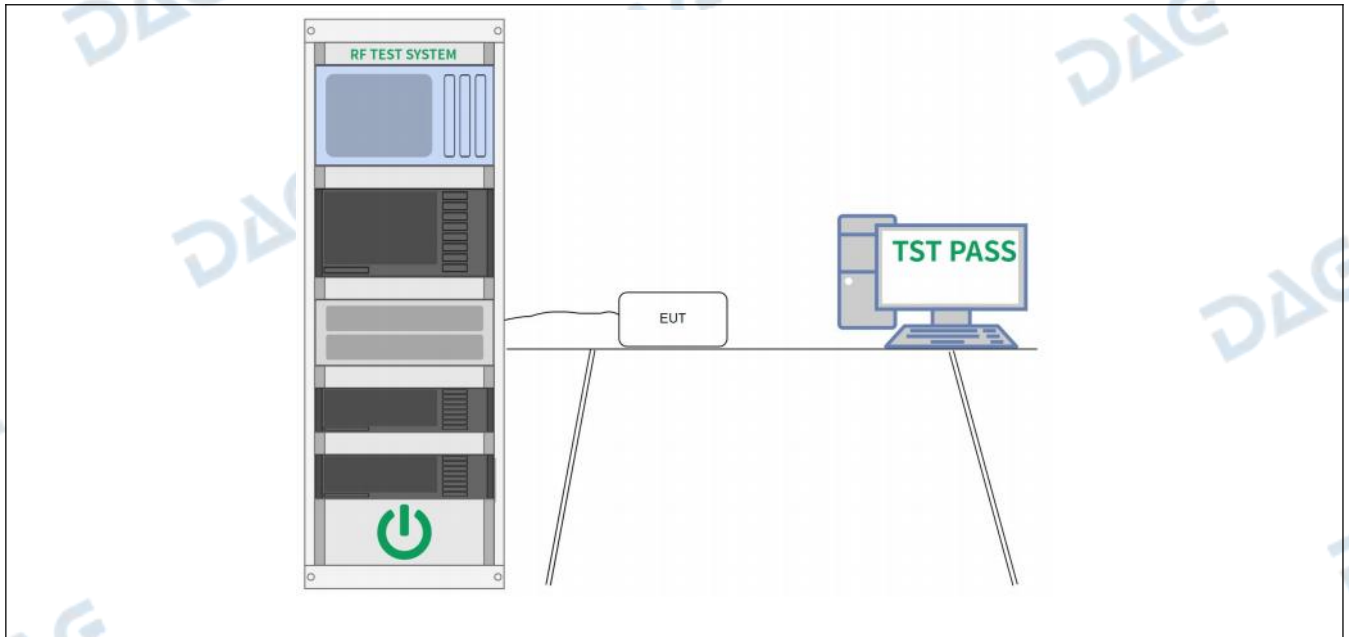

4.2.3 Test Data:

Please Refer to Appendix for Details.


4.3 Antenna Power and Tolerance

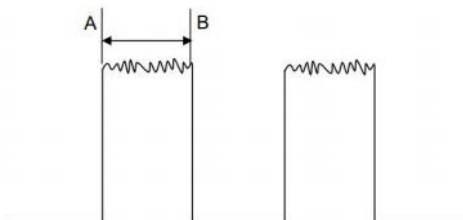Test Requirement:	Article 2-1, Item 19-3	
Test Limit:	10 mW/MHz or less for DSSS and OFDM 20MHz Bandwidth; 5mW/MHz or less for OFDM 40MHz Bandwidth; 2.5mW/MHz or less for OFDM 80MHz Bandwidth; 1.25mW/MHz or less for OFDM 80+80MHz or 160MHz Bandwidth; Antenna power tolerance: -80% ~ +20% for 5150~5250MHz and 5250~5350MHz; -50% ~ +50% for 5470~57250MHz;	
Test Method:	[Setting 1] – Search for peak power frequency	
	Center Frequency:	Test frequency
	Span:	Approximately twice the occupied bandwidth
	RBW:	1MHz
	VBW:	1MHz
	Sweep time:	Auto
	Sweep data points:	1001 or greater
	Detector mode:	Positive peak
	Indication mode:	Max hold
	[Setting 2] – Measurement of average antenna power for FHSS, DSSS, OFDM	
	Frequency:	Frequency of peak power found using [Setting 1]
	Span:	0 Hz
	RBW:	1 MHz
	Detector mode:	Sample
	Sweep data points:	1001 or greater
	After configuring the spectrum analyzer to [Setting 2], measure the Average Burst Power of the frequency found in (1) Antenna Power (W/MHz) = Average Burst Power	
	Note: Measure the period A-B in the figure below:	
	 Measurement of Average Burst Power (A to B)	
After configuring the spectrum analyzer to [Setting 1], find the frequency of maximum transmitted power After configuring the spectrum analyzer to [Setting 2], measure the Average Burst Power of the frequency found in (1) Antenna Power (W/MHz) = Average Burst Power		

4.3.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.8 °C	Humidity:	49 %	Atmospheric Pressure:	102 kPa
Pretest mode:		TM1, TM2, TM3, TM4, TM5, TM6			
Final test mode:		TM1, TM2, TM3, TM4, TM5, TM6			

4.3.2 Test Setup Diagram:

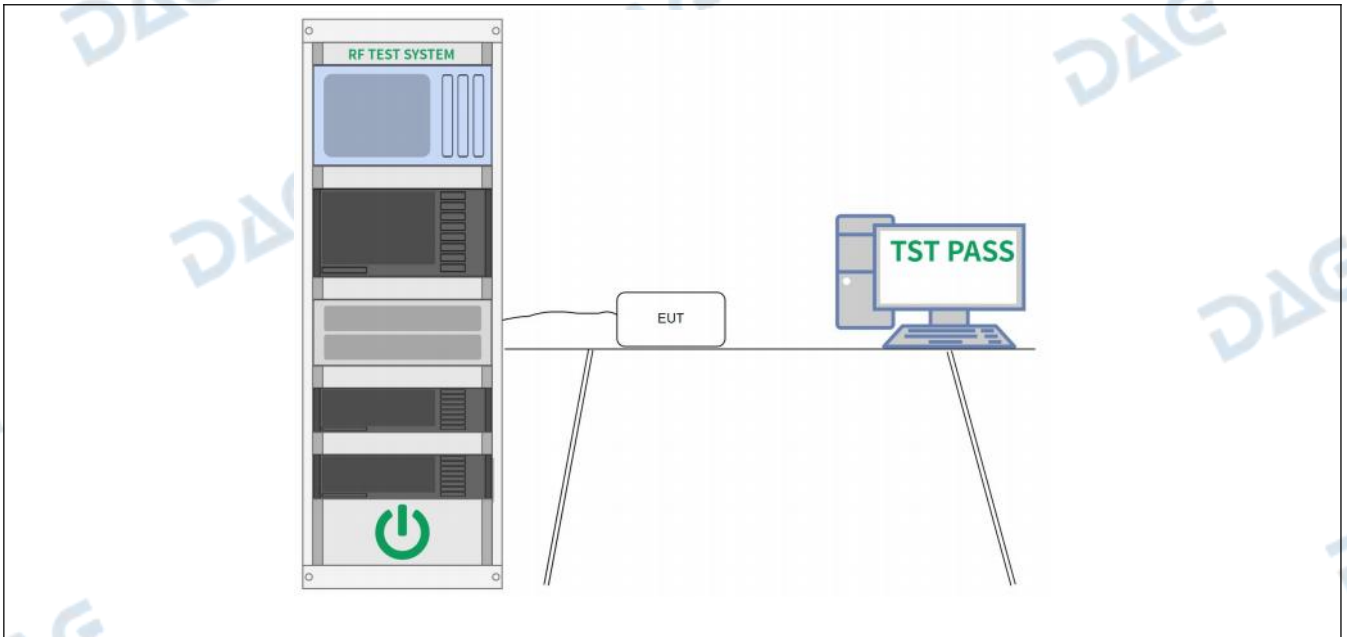

4.3.3 Test Data:

Please Refer to Appendix for Details.

4.4 Out of Band Emission


Test Requirement:	Article 2-1, Item 19-3																																																																																																																																																																																																																																																								
Test Limit:	<table><tr><th colspan="4">W52</th></tr><tr><th colspan="2">20MHz system</th><th colspan="2">40MHz system</th><th colspan="2">80MHz system</th></tr><tr><td>OBW: 18MHz or less</td><td>OBW: 18 - 20 MHz</td><td></td><td></td><td></td><td></td></tr><tr><td>5.142.0 kHz or less: 2.5 μV/MHz</td><td>5.142.0 kHz or less: 2.5 μV/MHz</td><td>5.141.6 kHz or less: 2.5 μV/MHz</td><td>5.123.2 kHz or less: 2.5 μV/MHz</td><td></td><td></td></tr><tr><td>5.142.0 - 5.150 MHz: 15 μV/MHz</td><td>5.142.0 - 5.150 MHz: 15 μV/MHz</td><td>5.141.6 - 5.150 MHz: 15 μV/MHz</td><td>5.123.2 - 5.150 MHz: 15 μV/MHz</td><td></td><td></td></tr><tr><td>5.250 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.250 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.250 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.250 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td></td><td></td></tr><tr><td>5.251 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.251 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.251 - 5.270 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.251 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td></td><td></td></tr><tr><td>5.260 - 5.266.7 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.260 - 5.266.7 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.270 - 5.276.4 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.260 - 5.266.7 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td></td><td></td></tr><tr><td>5.266.7 kHz or more: 2.5 μV/MHz</td><td>5.266.7 kHz or more: 2.5 μV/MHz</td><td>5.276.4 kHz or more: 2.5 μV/MHz</td><td>5.266.7 kHz or more: 2.5 μV/MHz</td><td></td><td></td></tr><tr><td>f = kHz, Difference from 5240 (kHz)</td><td>f = kHz, Difference from 5240 (kHz)</td><td>f = kHz, Difference from 5250 (kHz)</td><td>f = kHz, Difference from 5210 (kHz)</td><td></td><td></td></tr></table> <table><tr><th colspan="4">W53</th></tr><tr><th colspan="2">20MHz system</th><th colspan="2">40MHz system</th><th colspan="2">80MHz system</th></tr><tr><td>OBW: 18MHz or less</td><td>OBW: 18 - 20 MHz</td><td></td><td></td><td></td><td></td></tr><tr><td>5.233.3 kHz or less: 2.5 μV/MHz</td><td>5.233.3 kHz or less: 2.5 μV/MHz</td><td>5.221.6 kHz or less: 2.5 μV/MHz</td><td>5.203.3 kHz or less: 2.5 μV/MHz</td><td></td><td></td></tr><tr><td>5.233.3 - 5.240 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.233.3 - 5.240 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.221.6 - 5.230 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.203.3 - 5.210 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td></td><td></td></tr><tr><td>5.240 - 5.249 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.240 - 5.249 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.230 - 5.240 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.210 - 5.240 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td></td><td></td></tr><tr><td>5.249 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.249 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.240 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.240 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td></td><td></td></tr><tr><td>5.350 kHz or more: 2.5 μV/MHz</td><td>5.350 kHz or more: 2.5 μV/MHz</td><td>5.350 - 5.356.4 kHz: 15 μV/MHz</td><td>5.350 - 5.376.8 kHz: 15 μV/MHz</td><td></td><td></td></tr><tr><td>f = kHz, Difference from 5200 (kHz)</td><td>f = kHz, Difference from 5200 (kHz)</td><td>f = kHz, Difference from 5270 (kHz)</td><td>f = kHz, Difference from 5230 (kHz)</td><td></td><td></td></tr></table> <table><tr><th colspan="2">20MHz system</th><th colspan="2">40MHz system</th><th colspan="2">80MHz system</th></tr><tr><td>DSSS, etc.</td><td>OFDM</td><td></td><td></td><td></td><td></td></tr><tr><td>5.470 kHz or less: 12.5 μV/MHz</td><td>5.460 kHz or less: 2.5 μV/MHz</td><td>5.460 kHz or less: 12.5 μV/MHz</td><td>5.460 kHz or less: 12.5 μV/MHz</td><td></td><td></td></tr><tr><td></td><td>5.460 - 5.470 MHz: 12.5 μV/MHz</td><td>5.460 - 5.470 MHz: 50 μV/MHz</td><td>5.460 - 5.470 MHz: 50 μV/MHz</td><td></td><td></td></tr><tr><td>5.730 kHz or more: 12.5 μV/MHz</td><td>5.740 - 5.765 MHz: 12.5 μV/MHz</td><td>5.770 kHz or more: 12.5 μV/MHz</td><td>5.465.6 - 5.470 MHz: 51.2 μV/MHz</td><td></td><td></td></tr><tr><td></td><td>Over 5.765 MHz: 2.5 μV/MHz</td><td></td><td>5.770 kHz or more: 12.5 μV/MHz</td><td></td><td></td></tr></table> <table><tr><th colspan="2">W52 + W53</th><th colspan="2">W56</th></tr><tr><td colspan="2">160MHz system</td><td colspan="2"></td></tr><tr><td>5.099.8 kHz or less: 2.5 μV/MHz</td><td>5.410.6 kHz or less: 12.5 μV/MHz</td><td></td><td></td></tr><tr><td>5.099.8 - 5.150 MHz: 15 μV/MHz</td><td>5.410.6 - 5.470 MHz: 50 μV/MHz</td><td></td><td></td></tr><tr><td>5.350 - 5.400.4 MHz: 15 μV/MHz</td><td>5.720 MHz or more: 12.5 μV/MHz</td><td></td><td></td></tr><tr><td>5.400.4 kHz or more: 2.5 μV/MHz</td><td></td><td></td><td></td></tr></table> <table><tr><th colspan="2">5.210MHz & (5.530MHz, 5.610MHz or 5.690MHz)</th><th colspan="2">5.290MHz & (5.530MHz, 5.610MHz or 5.690MHz)</th><th colspan="2">5.530MHz & 5.690MHz</th></tr><tr><td colspan="2">80MHz + 80MHz system (Not adjacent radio)</td><td colspan="2">80MHz + 80MHz system (Not adjacent radio)</td><td colspan="2">80MHz + 80MHz system (Not adjacent radio)</td></tr><tr><td>5.124.8 kHz or less: 2.5 μV/MHz</td><td>5.214.8 kHz or less: 2.5 μV/MHz</td><td>5.410.6 kHz or less: 12.5 μV/MHz</td><td></td><td></td><td></td></tr><tr><td>5.124.8 - 5.150 MHz: 15.0 μV/MHz</td><td>5.214.8 - 5.240 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.410.6 - 5.470 MHz: 50 μV/MHz</td><td></td><td></td><td></td></tr><tr><td>5.250 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.249 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.410.6 - 5.470 MHz: 50 μV/MHz</td><td></td><td></td><td></td></tr><tr><td>5.251 - 5.266.7 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.350 - 5.365.2 MHz: 15 μV/MHz</td><td>5.770 kHz or more: 15 μV/MHz</td><td></td><td></td><td></td></tr><tr><td>5.266.7 - 5.370 MHz: 2.5 μV/MHz</td><td>5.365.2 - 5.410 MHz: 2.5 μV/MHz</td><td></td><td></td><td></td><td></td></tr><tr><td>2.5 μV/MHz (When used)</td><td>5.410 - 5.454.8 MHz: 2.5 μV/MHz</td><td></td><td></td><td></td><td></td></tr><tr><td>5.370 - 5.454.8 kHz: 15 μV/MHz</td><td>5.454.8 - 5.470 MHz: 15 μV/MHz</td><td></td><td></td><td></td><td></td></tr><tr><td>5.454.8 - 5.470 MHz: 15 μV/MHz</td><td>5.454.8 - 5.470 MHz: 15 μV/MHz</td><td></td><td></td><td></td><td></td></tr><tr><td>5.730 kHz or more: 15 μV/MHz</td><td>5.730 kHz or more: 15 μV/MHz</td><td></td><td></td><td></td><td></td></tr><tr><td>5.770 kHz or more: 15 μV/MHz</td><td>5.770 kHz or more: 15 μV/MHz</td><td></td><td></td><td></td><td></td></tr><tr><td>f = kHz, Difference from 5210 (kHz)</td><td>f = kHz, Difference from 5200 (kHz)</td><td></td><td></td><td></td><td></td></tr></table> * A rated value is defined by the E.I.R.P. * Measurement range: 30MHz to 26GHz	W52				20MHz system		40MHz system		80MHz system		OBW: 18MHz or less	OBW: 18 - 20 MHz					5.142.0 kHz or less: 2.5 μ V/MHz	5.142.0 kHz or less: 2.5 μ V/MHz	5.141.6 kHz or less: 2.5 μ V/MHz	5.123.2 kHz or less: 2.5 μ V/MHz			5.142.0 - 5.150 MHz: 15 μ V/MHz	5.142.0 - 5.150 MHz: 15 μ V/MHz	5.141.6 - 5.150 MHz: 15 μ V/MHz	5.123.2 - 5.150 MHz: 15 μ V/MHz			5.250 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.250 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.250 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.250 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz			5.251 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.251 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.251 - 5.270 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.251 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz			5.260 - 5.266.7 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.260 - 5.266.7 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.270 - 5.276.4 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.260 - 5.266.7 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz			5.266.7 kHz or more: 2.5 μ V/MHz	5.266.7 kHz or more: 2.5 μ V/MHz	5.276.4 kHz or more: 2.5 μ V/MHz	5.266.7 kHz or more: 2.5 μ V/MHz			f = kHz, Difference from 5240 (kHz)	f = kHz, Difference from 5240 (kHz)	f = kHz, Difference from 5250 (kHz)	f = kHz, Difference from 5210 (kHz)			W53				20MHz system		40MHz system		80MHz system		OBW: 18MHz or less	OBW: 18 - 20 MHz					5.233.3 kHz or less: 2.5 μ V/MHz	5.233.3 kHz or less: 2.5 μ V/MHz	5.221.6 kHz or less: 2.5 μ V/MHz	5.203.3 kHz or less: 2.5 μ V/MHz			5.233.3 - 5.240 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.233.3 - 5.240 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.221.6 - 5.230 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.203.3 - 5.210 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz			5.240 - 5.249 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.240 - 5.249 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.230 - 5.240 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.210 - 5.240 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz			5.249 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.249 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.240 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.240 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz			5.350 kHz or more: 2.5 μ V/MHz	5.350 kHz or more: 2.5 μ V/MHz	5.350 - 5.356.4 kHz: 15 μ V/MHz	5.350 - 5.376.8 kHz: 15 μ V/MHz			f = kHz, Difference from 5200 (kHz)	f = kHz, Difference from 5200 (kHz)	f = kHz, Difference from 5270 (kHz)	f = kHz, Difference from 5230 (kHz)			20MHz system		40MHz system		80MHz system		DSSS, etc.	OFDM					5.470 kHz or less: 12.5 μ V/MHz	5.460 kHz or less: 2.5 μ V/MHz	5.460 kHz or less: 12.5 μ V/MHz	5.460 kHz or less: 12.5 μ V/MHz				5.460 - 5.470 MHz: 12.5 μ V/MHz	5.460 - 5.470 MHz: 50 μ V/MHz	5.460 - 5.470 MHz: 50 μ V/MHz			5.730 kHz or more: 12.5 μ V/MHz	5.740 - 5.765 MHz: 12.5 μ V/MHz	5.770 kHz or more: 12.5 μ V/MHz	5.465.6 - 5.470 MHz: 51.2 μ V/MHz				Over 5.765 MHz: 2.5 μ V/MHz		5.770 kHz or more: 12.5 μ V/MHz			W52 + W53		W56		160MHz system				5.099.8 kHz or less: 2.5 μ V/MHz	5.410.6 kHz or less: 12.5 μ V/MHz			5.099.8 - 5.150 MHz: 15 μ V/MHz	5.410.6 - 5.470 MHz: 50 μ V/MHz			5.350 - 5.400.4 MHz: 15 μ V/MHz	5.720 MHz or more: 12.5 μ V/MHz			5.400.4 kHz or more: 2.5 μ V/MHz				5.210MHz & (5.530MHz, 5.610MHz or 5.690MHz)		5.290MHz & (5.530MHz, 5.610MHz or 5.690MHz)		5.530MHz & 5.690MHz		80MHz + 80MHz system (Not adjacent radio)		80MHz + 80MHz system (Not adjacent radio)		80MHz + 80MHz system (Not adjacent radio)		5.124.8 kHz or less: 2.5 μ V/MHz	5.214.8 kHz or less: 2.5 μ V/MHz	5.410.6 kHz or less: 12.5 μ V/MHz				5.124.8 - 5.150 MHz: 15.0 μ V/MHz	5.214.8 - 5.240 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.410.6 - 5.470 MHz: 50 μ V/MHz				5.250 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.249 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.410.6 - 5.470 MHz: 50 μ V/MHz				5.251 - 5.266.7 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.350 - 5.365.2 MHz: 15 μ V/MHz	5.770 kHz or more: 15 μ V/MHz				5.266.7 - 5.370 MHz: 2.5 μ V/MHz	5.365.2 - 5.410 MHz: 2.5 μ V/MHz					2.5 μ V/MHz (When used)	5.410 - 5.454.8 MHz: 2.5 μ V/MHz					5.370 - 5.454.8 kHz: 15 μ V/MHz	5.454.8 - 5.470 MHz: 15 μ V/MHz					5.454.8 - 5.470 MHz: 15 μ V/MHz	5.454.8 - 5.470 MHz: 15 μ V/MHz					5.730 kHz or more: 15 μ V/MHz	5.730 kHz or more: 15 μ V/MHz					5.770 kHz or more: 15 μ V/MHz	5.770 kHz or more: 15 μ V/MHz					f = kHz, Difference from 5210 (kHz)	f = kHz, Difference from 5200 (kHz)				
W52																																																																																																																																																																																																																																																									
20MHz system		40MHz system		80MHz system																																																																																																																																																																																																																																																					
OBW: 18MHz or less	OBW: 18 - 20 MHz																																																																																																																																																																																																																																																								
5.142.0 kHz or less: 2.5 μ V/MHz	5.142.0 kHz or less: 2.5 μ V/MHz	5.141.6 kHz or less: 2.5 μ V/MHz	5.123.2 kHz or less: 2.5 μ V/MHz																																																																																																																																																																																																																																																						
5.142.0 - 5.150 MHz: 15 μ V/MHz	5.142.0 - 5.150 MHz: 15 μ V/MHz	5.141.6 - 5.150 MHz: 15 μ V/MHz	5.123.2 - 5.150 MHz: 15 μ V/MHz																																																																																																																																																																																																																																																						
5.250 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.250 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.250 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.250 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz																																																																																																																																																																																																																																																						
5.251 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.251 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.251 - 5.270 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.251 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz																																																																																																																																																																																																																																																						
5.260 - 5.266.7 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.260 - 5.266.7 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.270 - 5.276.4 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.260 - 5.266.7 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz																																																																																																																																																																																																																																																						
5.266.7 kHz or more: 2.5 μ V/MHz	5.266.7 kHz or more: 2.5 μ V/MHz	5.276.4 kHz or more: 2.5 μ V/MHz	5.266.7 kHz or more: 2.5 μ V/MHz																																																																																																																																																																																																																																																						
f = kHz, Difference from 5240 (kHz)	f = kHz, Difference from 5240 (kHz)	f = kHz, Difference from 5250 (kHz)	f = kHz, Difference from 5210 (kHz)																																																																																																																																																																																																																																																						
W53																																																																																																																																																																																																																																																									
20MHz system		40MHz system		80MHz system																																																																																																																																																																																																																																																					
OBW: 18MHz or less	OBW: 18 - 20 MHz																																																																																																																																																																																																																																																								
5.233.3 kHz or less: 2.5 μ V/MHz	5.233.3 kHz or less: 2.5 μ V/MHz	5.221.6 kHz or less: 2.5 μ V/MHz	5.203.3 kHz or less: 2.5 μ V/MHz																																																																																																																																																																																																																																																						
5.233.3 - 5.240 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.233.3 - 5.240 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.221.6 - 5.230 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.203.3 - 5.210 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz																																																																																																																																																																																																																																																						
5.240 - 5.249 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.240 - 5.249 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.230 - 5.240 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.210 - 5.240 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz																																																																																																																																																																																																																																																						
5.249 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.249 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.240 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.240 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz																																																																																																																																																																																																																																																						
5.350 kHz or more: 2.5 μ V/MHz	5.350 kHz or more: 2.5 μ V/MHz	5.350 - 5.356.4 kHz: 15 μ V/MHz	5.350 - 5.376.8 kHz: 15 μ V/MHz																																																																																																																																																																																																																																																						
f = kHz, Difference from 5200 (kHz)	f = kHz, Difference from 5200 (kHz)	f = kHz, Difference from 5270 (kHz)	f = kHz, Difference from 5230 (kHz)																																																																																																																																																																																																																																																						
20MHz system		40MHz system		80MHz system																																																																																																																																																																																																																																																					
DSSS, etc.	OFDM																																																																																																																																																																																																																																																								
5.470 kHz or less: 12.5 μ V/MHz	5.460 kHz or less: 2.5 μ V/MHz	5.460 kHz or less: 12.5 μ V/MHz	5.460 kHz or less: 12.5 μ V/MHz																																																																																																																																																																																																																																																						
	5.460 - 5.470 MHz: 12.5 μ V/MHz	5.460 - 5.470 MHz: 50 μ V/MHz	5.460 - 5.470 MHz: 50 μ V/MHz																																																																																																																																																																																																																																																						
5.730 kHz or more: 12.5 μ V/MHz	5.740 - 5.765 MHz: 12.5 μ V/MHz	5.770 kHz or more: 12.5 μ V/MHz	5.465.6 - 5.470 MHz: 51.2 μ V/MHz																																																																																																																																																																																																																																																						
	Over 5.765 MHz: 2.5 μ V/MHz		5.770 kHz or more: 12.5 μ V/MHz																																																																																																																																																																																																																																																						
W52 + W53		W56																																																																																																																																																																																																																																																							
160MHz system																																																																																																																																																																																																																																																									
5.099.8 kHz or less: 2.5 μ V/MHz	5.410.6 kHz or less: 12.5 μ V/MHz																																																																																																																																																																																																																																																								
5.099.8 - 5.150 MHz: 15 μ V/MHz	5.410.6 - 5.470 MHz: 50 μ V/MHz																																																																																																																																																																																																																																																								
5.350 - 5.400.4 MHz: 15 μ V/MHz	5.720 MHz or more: 12.5 μ V/MHz																																																																																																																																																																																																																																																								
5.400.4 kHz or more: 2.5 μ V/MHz																																																																																																																																																																																																																																																									
5.210MHz & (5.530MHz, 5.610MHz or 5.690MHz)		5.290MHz & (5.530MHz, 5.610MHz or 5.690MHz)		5.530MHz & 5.690MHz																																																																																																																																																																																																																																																					
80MHz + 80MHz system (Not adjacent radio)		80MHz + 80MHz system (Not adjacent radio)		80MHz + 80MHz system (Not adjacent radio)																																																																																																																																																																																																																																																					
5.124.8 kHz or less: 2.5 μ V/MHz	5.214.8 kHz or less: 2.5 μ V/MHz	5.410.6 kHz or less: 12.5 μ V/MHz																																																																																																																																																																																																																																																							
5.124.8 - 5.150 MHz: 15.0 μ V/MHz	5.214.8 - 5.240 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.410.6 - 5.470 MHz: 50 μ V/MHz																																																																																																																																																																																																																																																							
5.250 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.249 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.410.6 - 5.470 MHz: 50 μ V/MHz																																																																																																																																																																																																																																																							
5.251 - 5.266.7 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.350 - 5.365.2 MHz: 15 μ V/MHz	5.770 kHz or more: 15 μ V/MHz																																																																																																																																																																																																																																																							
5.266.7 - 5.370 MHz: 2.5 μ V/MHz	5.365.2 - 5.410 MHz: 2.5 μ V/MHz																																																																																																																																																																																																																																																								
2.5 μ V/MHz (When used)	5.410 - 5.454.8 MHz: 2.5 μ V/MHz																																																																																																																																																																																																																																																								
5.370 - 5.454.8 kHz: 15 μ V/MHz	5.454.8 - 5.470 MHz: 15 μ V/MHz																																																																																																																																																																																																																																																								
5.454.8 - 5.470 MHz: 15 μ V/MHz	5.454.8 - 5.470 MHz: 15 μ V/MHz																																																																																																																																																																																																																																																								
5.730 kHz or more: 15 μ V/MHz	5.730 kHz or more: 15 μ V/MHz																																																																																																																																																																																																																																																								
5.770 kHz or more: 15 μ V/MHz	5.770 kHz or more: 15 μ V/MHz																																																																																																																																																																																																																																																								
f = kHz, Difference from 5210 (kHz)	f = kHz, Difference from 5200 (kHz)																																																																																																																																																																																																																																																								
Test Method:	<table><tr><td colspan="2">[Setting 1]</td></tr><tr><td>Frequency range:</td><td>Test frequency range as required</td></tr><tr><td>RBW:</td><td>1 MHz</td></tr><tr><td>VBW:</td><td>1 MHz</td></tr><tr><td>Sweep time:</td><td>Minimum time required to make an accurate measurement</td></tr><tr><td>Sweep Data Points:</td><td>1001 or greater</td></tr><tr><td>Detector mode:</td><td>Positive peak</td></tr><tr><td>Indication mode:</td><td>Max hold (see Note 1)</td></tr><tr><td>Note 1:</td><td>Sweep shall be repeated until the max hold waveform is stable.</td></tr></table> <table><tr><td colspan="2">[Setting 2]</td></tr><tr><td>Center frequency:</td><td>Frequency of spurious emission found using [Setting 1]</td></tr><tr><td>Span:</td><td>0 Hz</td></tr><tr><td>RBW:</td><td>1 MHz</td></tr><tr><td>VBW:</td><td>1 MHz</td></tr><tr><td>Sweep time:</td><td>Minimum time required to make an accurate measurement. For burst type (intermittent) spurious emissions, sweep time shall be greater than one burst interval</td></tr></table>	[Setting 1]		Frequency range:	Test frequency range as required	RBW:	1 MHz	VBW:	1 MHz	Sweep time:	Minimum time required to make an accurate measurement	Sweep Data Points:	1001 or greater	Detector mode:	Positive peak	Indication mode:	Max hold (see Note 1)	Note 1:	Sweep shall be repeated until the max hold waveform is stable.	[Setting 2]		Center frequency:	Frequency of spurious emission found using [Setting 1]	Span:	0 Hz	RBW:	1 MHz	VBW:	1 MHz	Sweep time:	Minimum time required to make an accurate measurement. For burst type (intermittent) spurious emissions, sweep time shall be greater than one burst interval																																																																																																																																																																																																																										
[Setting 1]																																																																																																																																																																																																																																																									
Frequency range:	Test frequency range as required																																																																																																																																																																																																																																																								
RBW:	1 MHz																																																																																																																																																																																																																																																								
VBW:	1 MHz																																																																																																																																																																																																																																																								
Sweep time:	Minimum time required to make an accurate measurement																																																																																																																																																																																																																																																								
Sweep Data Points:	1001 or greater																																																																																																																																																																																																																																																								
Detector mode:	Positive peak																																																																																																																																																																																																																																																								
Indication mode:	Max hold (see Note 1)																																																																																																																																																																																																																																																								
Note 1:	Sweep shall be repeated until the max hold waveform is stable.																																																																																																																																																																																																																																																								
[Setting 2]																																																																																																																																																																																																																																																									
Center frequency:	Frequency of spurious emission found using [Setting 1]																																																																																																																																																																																																																																																								
Span:	0 Hz																																																																																																																																																																																																																																																								
RBW:	1 MHz																																																																																																																																																																																																																																																								
VBW:	1 MHz																																																																																																																																																																																																																																																								
Sweep time:	Minimum time required to make an accurate measurement. For burst type (intermittent) spurious emissions, sweep time shall be greater than one burst interval																																																																																																																																																																																																																																																								

	Sweep Data Points:	1001 or greater
	Detector mode:	Sample
Procedure:	(1) After configuring the spectrum analyzer to [Setting 1], search for spurious emissions from 30 MHz to 12.5 GHz. If the sweep range does not cover the required measurement frequency range then the measurement range will need to be divided into sufficient sections of size [RBW x Sweep Data Points]. If spurious emissions greater than [Limit - 3dB] are found, then more detailed measurements are required, go to step (2) (2) Configure the spectrum analyzer using [Setting 2] and measure the average signal amplitude. If the spurious emission is burst type (intermittent), then the average value shall not include signal OFF time. (3) Calculate the spurious emission value (Calculated Value) using following the formula below: Calculated Value = (Measured Value using (3) + 15.2dB) Note: 15.2dB adjustment is derived from the Conversion Factor of RBW Conversion Factor of RBW = 10 x Log (Reference Bandwidth / RBW of measurement) = 15.2 [dB] Where: Reference Bandwidth = 1 MHz RBW of measurement = 30 kHz (4) If the calculated value using (4) is over the Limit (section 6.7), go to (6) (6) Configure the spectrum analyzer to [Setting 3] then make the following changes: Frequency: Frequency of spurious emission Span: 1 MHz (6) After sweep, send the span data set to the PC (7) Convert measured data from dBm to Watts (8) Sum all the data using the formula below. If the sum is within the limit, the test result is Pass, otherwise, Fail $P_s = \left(\sum_{i=1}^n E_i \right) \times \frac{S_w}{RBW \times k \times n}$ Ps: Sum (Watts) Ei: Measured value at each point in the Span (Watts) Sw: Span (1MHz) n: Number of measurement points in the Span k: Correction factor for Equivalent Noise Bandwidth, specific to each spectrum analyzer, check the instrument user guide RBW: Resolution Bandwidth (MHz). (9) If the EUT has multiple antennas, measure the spurious emission form each individual antenna using steps (1) through (9) (10) Convert the individual antenna spurious level measurements (step (10)) from dB to absolute values (11) Combine (sum) the absolute values of the spurious measurements at each frequency for each antenna (to create a single composite spectrum of spurious emissions) (12) Ensure that the composite spectrum does not exceed the Limit defined in 6.7 (Technical Standard) (13) Configuring the spectrum analyzer using [Setting 3] and measure the spurious emissions with all the antennas electrically combined	

4.4.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.8 °C	Humidity:	49 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM1, TM2, TM3, TM4, TM5, TM6				
Final test mode:	TM1, TM2, TM3, TM4, TM5, TM6				

4.4.2 Test Setup Diagram:

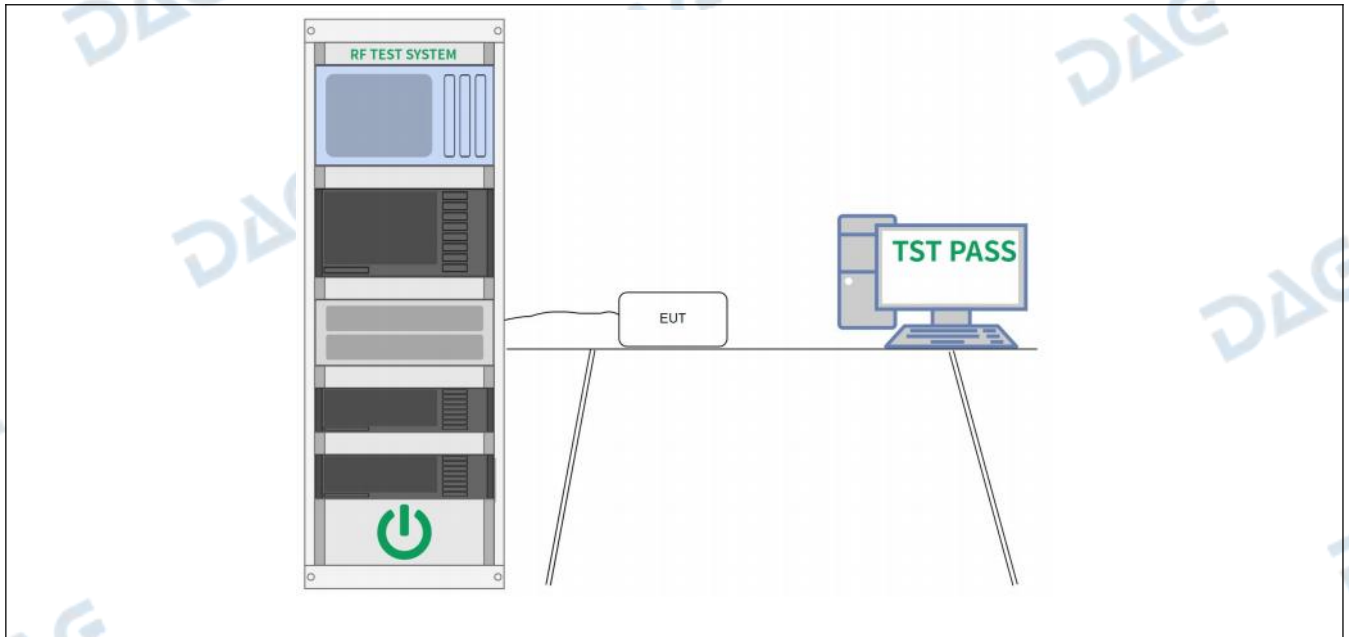

4.4.3 Test Data:

Please Refer to Appendix for Details.

4.5 Adjacent Channel Emitted Power


Test Requirement:	Article 2-1, Item 19-3
Test Limit:	For Bandwidth equal to 20MHz and 40MHz: $F_c \pm 20\text{MHz} : -25\text{dBc}$ $F_c \pm 40\text{MHz} : -40\text{dBc}$ For Bandwidth above 40MHz: $F_c \pm 80\text{MHz} : -25\text{dBc}$
Test Method:	Center Frequency: Test Frequency Span: (see Note1) RBW: 300kHz VBW: 300kHz Sweep time: Auto Sweep data points: 1001 or greater Detector mode: Sample (for Continuous Type) Positive peak (for Burst Type) Indication mode: Single sweep (for Continuous Type) Max hold (for Burst Type) Note1: 5.2GHz and 5.3GHz Band: $\text{OBW} \leq 18\text{MHz} : 18\text{MHz}$ $18\text{MHz} < \text{OBW} \leq 19\text{MHz} : 19\text{MHz}$ $19\text{MHz} < \text{OBW} \leq 38\text{MHz} : 38\text{MHz}$ $38\text{MHz} < \text{OBW} \leq 78\text{MHz} : 78\text{MHz}$ 5.6GHz Band: OFDM: $\text{OBW} \leq 19.7\text{MHz} : 19\text{MHz}$ $19.7\text{MHz} < \text{OBW} \leq 38\text{MHz} : 38\text{MHz}$ $38\text{MHz} < \text{OBW} \leq 78\text{MHz} : 78\text{MHz}$ Others: 18MHz
Procedure:	(1) Configure the spectrum analyzer to [Setting 1] and set the EUT to transmit mode (2) Measure the transmitter power (defined as P_C) using the procedure shown below: (a) Set the center of the span to the transmit frequency (b) After sweeping the entire span, send the span data set to the PC (c) Convert measured data from dBm to Watts (d) Sum all the data to derive the P_C (3) Measure the Upper Adjacent Channel Leakage Power (defined as P_U) using the procedure shown below. For measurement frequency, see Note2. (a) Set the center of the span to [Transmit Frequency + 20 MHz (or 40 MHz)] (b) Sweep the entire span, send the span data set to the PC (c) Convert measured data from dBm to Watts (d) Sum all the data to derive the P_U (e) After setting the center of the span to [Transmit Frequency + 40MHz (or 80 MHz)], repeat steps (b) through step (d) (4) Measure the Lower Adjacent Channel Leakage Power (defined as P_L) using the procedure shown below. For measurement frequency, see Note2. (a) Set the center of the span to [Transmit Frequency + 20 MHz (or 40 MHz)] (b) Sweep the entire span, send the span data set to the PC (c) Convert measured data from dBm to Watts (d) Sum all the data to derive the P_L (e) After setting the center of the span to [Transmit Frequency + 40MHz (or 80 MHz)], repeat steps (b) through step (d) (5) Derive all the Adjacent Channel Leakage Power Ratios using the formula shown below: - Upper Adjacent Channel Leakage Power Ratio = $10 \log (P_U / P_C)$ - Lower Adjacent Channel Leakage Power Ratio = $10 \log (P_L / P_C)$

- (6) If the EUT has multiple antennas then the following steps shall be taken:
- (a) Repeat steps (1) through step (5) for each individual antenna
 - (b) Repeat steps (1) through step (5) with all the antennas combined
 - (c) To derive the total P_C , sum the individual antenna P_C measurements from step (a)
 - (d) Derive the total P_U and total P_L using the same procedure as step (c)
 - (e) Calculate the Adjacent Channel Leakage Power Ratio using the total P_C , total P_U and total P_L using the formula in step (5)
 - (f) Note 2:
- 5.2 GHz and 5.3 GHz band:
- OBW $\leq$ 18 MHz: Transmit frequency $\pm$ 20 MHz, $\pm$ 40 MHz
- 18MHz < OBW $\leq$ 19MHz: Transmit frequency $\pm$ 20 MHz, $\pm$ 40 MHz
- 19MHz < OBW $\leq$ 38MHz: Transmit frequency $\pm$ 40 MHz, $\pm$ 80 MHz
- 38MHz < OBW $\leq$ 78MHz: Transmit frequency $\pm$ 80 MHz
- 5.6GHz Band:
- OFDM:
- OBW $\leq$ 19.7MHz: Transmit frequency $\pm$ 20 MHz, $\pm$ 40 MHz
- 19.7MHz < OBW $\leq$ 38MHz: Transmit frequency $\pm$ 40 MHz, $\pm$ 80 MHz
- 38MHz < OBW $\leq$ 78MHz: Transmit frequency $\pm$ 80 MHz
- Other than OFDM: Transmit frequency $\pm$ 20 MHz, $\pm$ 40 MHz

4.5.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.8 °C	Humidity:	49 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM1, TM2, TM3, TM4, TM5, TM6				
Final test mode:	TM1, TM2, TM3, TM4, TM5, TM6				

4.5.2 Test Setup Diagram:

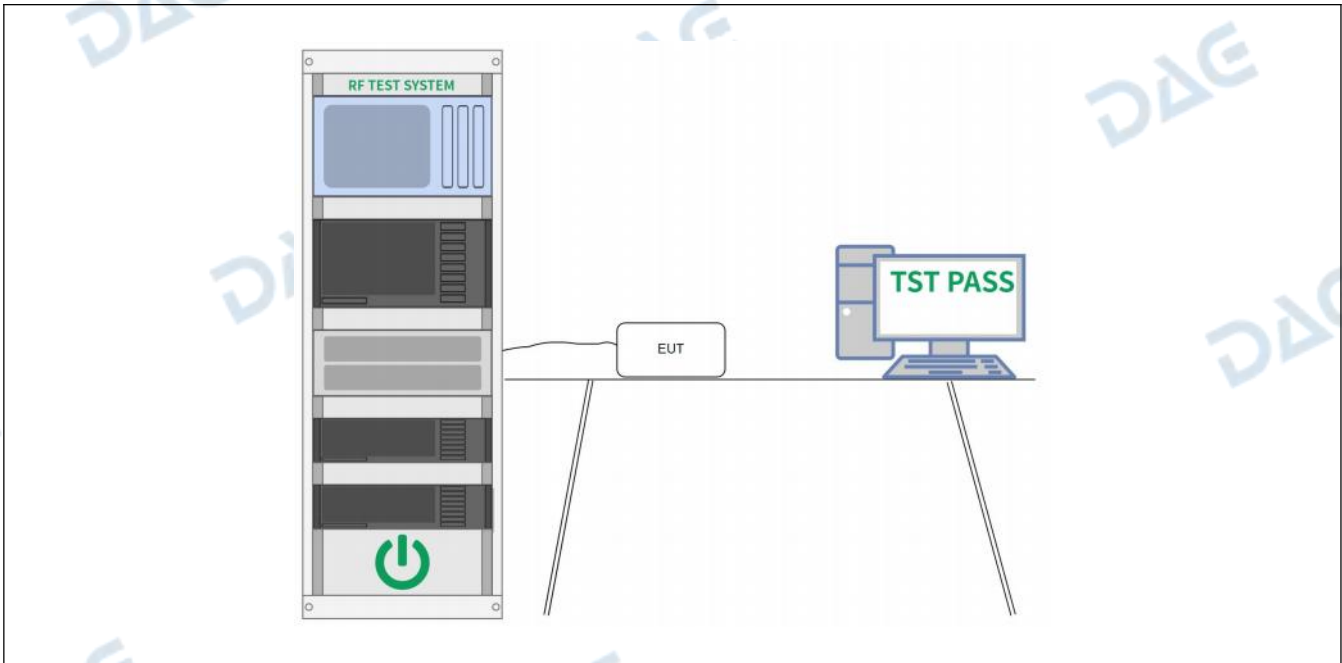

4.5.3 Test Data:

Please Refer to Appendix for Details.

4.6 Spurious Emission Intensity


Test Requirement:	Article 2-1, Item 19-3																																																																																																																																																																			
Test Limit:	<table><tr><th colspan="4">W52</th></tr><tr><th colspan="2">20MHz system</th><th>40MHz system</th><th>80MHz system</th></tr><tr><td>OBW: 18MHz or less</td><td>OBW: 18 - 20 MHz</td><td></td><td></td></tr><tr><td>5.142 MHz or less: 2.5 μV/MHz</td><td>5.142 MHz or less: 2.5 μV/MHz</td><td>5.141.6 MHz or less: 2.5 μV/MHz</td><td>5.123.2 MHz or less: 2.5 μV/MHz</td></tr><tr><td>5.142 - 5.150 MHz: 15 μV/MHz</td><td>5.142 - 5.150 MHz: 15 μV/MHz</td><td>5.141.6 - 5.150 MHz: 15 μV/MHz</td><td>5.123.2 - 5.150 MHz: 15 μV/MHz</td></tr><tr><td>5.250 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.250.2 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.250 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.250 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td></tr><tr><td>5.251 - 5.260 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.251 - 5.260 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.251 - 5.270 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.251 - 5.260 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td></tr><tr><td>5.260 - 5.266.7 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.260 - 5.266.7 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.270 - 5.276.4 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.260 - 5.266.7 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td></tr><tr><td>5.266.7 MHz or more: 2.5 μV/MHz</td><td>5.266.7 MHz or more: 2.5 μV/MHz</td><td>5.276.4 MHz or more: 2.5 μV/MHz</td><td>5.266.7 MHz or more: 2.5 μV/MHz</td></tr><tr><td>f = 5MHz, Difference from 5240 (dBHz)</td><td>f = 5MHz, Difference from 5240 (dBHz)</td><td>f = 5MHz, Difference from 5230 (dBHz)</td><td>f = 5MHz, Difference from 5210 (dBHz)</td></tr></table> <table><tr><th colspan="4">W53</th></tr><tr><th colspan="2">20MHz system</th><th>40MHz system</th><th>80MHz system</th></tr><tr><td>OBW: 18MHz or less</td><td>OBW: 18 - 20 MHz</td><td></td><td></td></tr><tr><td>5.233.3 MHz or less: 2.5 μV/MHz</td><td>5.233.3 MHz or less: 2.5 μV/MHz</td><td>5.221.6 MHz or less: 2.5 μV/MHz</td><td>5.233.3 MHz or less: 2.5 μV/MHz</td></tr><tr><td>5.233.3 - 5.240 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.233.3 - 5.240 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.221.6 - 5.230 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.233.3 - 5.210 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td></tr><tr><td>5.240 - 5.249 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.240 - 5.249 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.230 - 5.240 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.210 - 5.249 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td></tr><tr><td>5.249 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.249 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.240 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.240 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td></tr><tr><td>5.350 MHz or more: 2.5 μV/MHz</td><td>5.350 MHz or more: 2.5 μV/MHz</td><td>5.350 - 5.356.4 MHz: 15 μV/MHz</td><td>5.350 - 5.375.8 MHz: 15 μV/MHz</td></tr><tr><td>f = 5MHz, Difference from 5200 (dBHz)</td><td>f = 5MHz, Difference from 5200 (dBHz)</td><td>f = 5MHz, Difference from 5270 (dBHz)</td><td>f = 5MHz, Difference from 5230 (dBHz)</td></tr></table> <table><tr><th colspan="4">W56</th></tr><tr><th colspan="2">20MHz system</th><th>40MHz system</th><th>80MHz system</th></tr><tr><td>DSSS, etc.</td><td>OFDM</td><td></td><td></td></tr><tr><td>5.470 MHz or less: 12.5 μV/MHz</td><td>5.460 MHz or less: 2.5 μV/MHz</td><td>5.460 MHz or less: 12.5 μV/MHz</td><td>5.460 MHz or less: 12.5 μV/MHz</td></tr><tr><td></td><td>5.460 - 5.470 MHz: 12.5 μV/MHz</td><td>5.460 - 5.470 MHz: 50 μV/MHz</td><td>5.460 - 5.465 MHz: 50 μV/MHz</td></tr><tr><td>5.730 MHz or more: 12.5 μV/MHz</td><td>5.745 - 5.765 MHz: 12.5 μV/MHz</td><td>5.770 MHz or more: 12.5 μV/MHz</td><td>5.465.5 - 5.470 MHz: 51.2 μV/MHz</td></tr><tr><td></td><td>Over 5.765 MHz: 2.5 μV/MHz</td><td></td><td>5.770 MHz or more: 12.5 μV/MHz</td></tr></table> <table><tr><th>W52 + W53</th><th>W56</th><td>* A rated value is defined by the E.I.R.P.</td></tr><tr><td colspan="2">100MHz system</td><td>* Measurement range: 30MHz to 26GHz</td></tr><tr><td>5.099.8 MHz or less: 2.5 μV/MHz</td><td>5.410.8 MHz or less: 12.5 μV/MHz</td><td></td></tr><tr><td>5.099.8 - 5.150 MHz: 15 μV/MHz</td><td>5.410.8 - 5.470 MHz: 50 μV/MHz</td><td></td></tr><tr><td>5.350 - 5.400.4 MHz: 15 μV/MHz</td><td>5.720 MHz or more: 12.5 μV/MHz</td><td></td></tr><tr><td>5.400.4 MHz or more: 2.5 μV/MHz</td><td></td><td></td></tr></table> <table><tr><th>5.210GHz & (5.530GHz, 5.610GHz or 5.690GHz)</th><th>5.290GHz & (5.530GHz, 5.610GHz or 5.690GHz)</th><th>5.530GHz & 5.690GHz</th></tr><tr><td colspan="3">80MHz + 80MHz system (that adjacent radio)</td></tr><tr><td>5.124.8 MHz or less: 2.5 μV/MHz</td><td>5.214.8 MHz or less: 2.5 μV/MHz</td><td>5.410.8 MHz or less: 12.5 μV/MHz</td></tr><tr><td>5.124.8 - 5.150 MHz: 15.0 μV/MHz</td><td>5.214.8 - 5.240 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.410.8 - 5.470 MHz: 50 μV/MHz</td></tr><tr><td>5.250 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.240 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.770 MHz or more: 15 μV/MHz</td></tr><tr><td>5.251 - 5.265.2 MHz: $10^{-17} \cdot f^{1.75} \mu$V/MHz</td><td>5.350 - 5.365.2 MHz: 15 μV/MHz</td><td></td></tr><tr><td>5.265.2 - 5.370 MHz: 2.5 μV/MHz</td><td>5.365.2 - 5.410 MHz: 2.5 μV/MHz</td><td></td></tr><tr><td>2.5 μV/MHz (When used)</td><td></td><td></td></tr><tr><td>5.370 - 5.454.8 MHz: 15 μV/MHz</td><td>5.410 - 5.454.8 MHz: 15 μV/MHz</td><td></td></tr><tr><td>5.454.8 - 5.470 MHz: 15 μV/MHz</td><td>5.454.8 - 5.470 MHz: 15 μV/MHz</td><td></td></tr><tr><td>5.730 MHz or more: 15 μV/MHz</td><td>5.730 MHz or more: 15 μV/MHz</td><td></td></tr><tr><td>5.770 MHz or more: 15 μV/MHz</td><td>5.770 MHz or more: 15 μV/MHz</td><td></td></tr><tr><td>f = 5MHz, Difference from 5210 (dBHz)</td><td>f = 5MHz, Difference from 5230 (dBHz)</td><td></td></tr></table>			W52				20MHz system		40MHz system	80MHz system	OBW: 18MHz or less	OBW: 18 - 20 MHz			5.142 MHz or less: 2.5 μ V/MHz	5.142 MHz or less: 2.5 μ V/MHz	5.141.6 MHz or less: 2.5 μ V/MHz	5.123.2 MHz or less: 2.5 μ V/MHz	5.142 - 5.150 MHz: 15 μ V/MHz	5.142 - 5.150 MHz: 15 μ V/MHz	5.141.6 - 5.150 MHz: 15 μ V/MHz	5.123.2 - 5.150 MHz: 15 μ V/MHz	5.250 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.250.2 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.250 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.250 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.251 - 5.260 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.251 - 5.260 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.251 - 5.270 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.251 - 5.260 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.260 - 5.266.7 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.260 - 5.266.7 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.270 - 5.276.4 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.260 - 5.266.7 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.266.7 MHz or more: 2.5 μ V/MHz	5.266.7 MHz or more: 2.5 μ V/MHz	5.276.4 MHz or more: 2.5 μ V/MHz	5.266.7 MHz or more: 2.5 μ V/MHz	f = 5MHz, Difference from 5240 (dBHz)	f = 5MHz, Difference from 5240 (dBHz)	f = 5MHz, Difference from 5230 (dBHz)	f = 5MHz, Difference from 5210 (dBHz)	W53				20MHz system		40MHz system	80MHz system	OBW: 18MHz or less	OBW: 18 - 20 MHz			5.233.3 MHz or less: 2.5 μ V/MHz	5.233.3 MHz or less: 2.5 μ V/MHz	5.221.6 MHz or less: 2.5 μ V/MHz	5.233.3 MHz or less: 2.5 μ V/MHz	5.233.3 - 5.240 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.233.3 - 5.240 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.221.6 - 5.230 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.233.3 - 5.210 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.240 - 5.249 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.240 - 5.249 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.230 - 5.240 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.210 - 5.249 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.249 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.249 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.240 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.240 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.350 MHz or more: 2.5 μ V/MHz	5.350 MHz or more: 2.5 μ V/MHz	5.350 - 5.356.4 MHz: 15 μ V/MHz	5.350 - 5.375.8 MHz: 15 μ V/MHz	f = 5MHz, Difference from 5200 (dBHz)	f = 5MHz, Difference from 5200 (dBHz)	f = 5MHz, Difference from 5270 (dBHz)	f = 5MHz, Difference from 5230 (dBHz)	W56				20MHz system		40MHz system	80MHz system	DSSS, etc.	OFDM			5.470 MHz or less: 12.5 μ V/MHz	5.460 MHz or less: 2.5 μ V/MHz	5.460 MHz or less: 12.5 μ V/MHz	5.460 MHz or less: 12.5 μ V/MHz		5.460 - 5.470 MHz: 12.5 μ V/MHz	5.460 - 5.470 MHz: 50 μ V/MHz	5.460 - 5.465 MHz: 50 μ V/MHz	5.730 MHz or more: 12.5 μ V/MHz	5.745 - 5.765 MHz: 12.5 μ V/MHz	5.770 MHz or more: 12.5 μ V/MHz	5.465.5 - 5.470 MHz: 51.2 μ V/MHz		Over 5.765 MHz: 2.5 μ V/MHz		5.770 MHz or more: 12.5 μ V/MHz	W52 + W53	W56	* A rated value is defined by the E.I.R.P.	100MHz system		* Measurement range: 30MHz to 26GHz	5.099.8 MHz or less: 2.5 μ V/MHz	5.410.8 MHz or less: 12.5 μ V/MHz		5.099.8 - 5.150 MHz: 15 μ V/MHz	5.410.8 - 5.470 MHz: 50 μ V/MHz		5.350 - 5.400.4 MHz: 15 μ V/MHz	5.720 MHz or more: 12.5 μ V/MHz		5.400.4 MHz or more: 2.5 μ V/MHz			5.210GHz & (5.530GHz, 5.610GHz or 5.690GHz)	5.290GHz & (5.530GHz, 5.610GHz or 5.690GHz)	5.530GHz & 5.690GHz	80MHz + 80MHz system (that adjacent radio)			5.124.8 MHz or less: 2.5 μ V/MHz	5.214.8 MHz or less: 2.5 μ V/MHz	5.410.8 MHz or less: 12.5 μ V/MHz	5.124.8 - 5.150 MHz: 15.0 μ V/MHz	5.214.8 - 5.240 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.410.8 - 5.470 MHz: 50 μ V/MHz	5.250 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.240 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.770 MHz or more: 15 μ V/MHz	5.251 - 5.265.2 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.350 - 5.365.2 MHz: 15 μ V/MHz		5.265.2 - 5.370 MHz: 2.5 μ V/MHz	5.365.2 - 5.410 MHz: 2.5 μ V/MHz		2.5 μ V/MHz (When used)			5.370 - 5.454.8 MHz: 15 μ V/MHz	5.410 - 5.454.8 MHz: 15 μ V/MHz		5.454.8 - 5.470 MHz: 15 μ V/MHz	5.454.8 - 5.470 MHz: 15 μ V/MHz		5.730 MHz or more: 15 μ V/MHz	5.730 MHz or more: 15 μ V/MHz		5.770 MHz or more: 15 μ V/MHz	5.770 MHz or more: 15 μ V/MHz		f = 5MHz, Difference from 5210 (dBHz)	f = 5MHz, Difference from 5230 (dBHz)	
W52																																																																																																																																																																				
20MHz system		40MHz system	80MHz system																																																																																																																																																																	
OBW: 18MHz or less	OBW: 18 - 20 MHz																																																																																																																																																																			
5.142 MHz or less: 2.5 μ V/MHz	5.142 MHz or less: 2.5 μ V/MHz	5.141.6 MHz or less: 2.5 μ V/MHz	5.123.2 MHz or less: 2.5 μ V/MHz																																																																																																																																																																	
5.142 - 5.150 MHz: 15 μ V/MHz	5.142 - 5.150 MHz: 15 μ V/MHz	5.141.6 - 5.150 MHz: 15 μ V/MHz	5.123.2 - 5.150 MHz: 15 μ V/MHz																																																																																																																																																																	
5.250 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.250.2 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.250 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.250 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz																																																																																																																																																																	
5.251 - 5.260 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.251 - 5.260 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.251 - 5.270 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.251 - 5.260 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz																																																																																																																																																																	
5.260 - 5.266.7 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.260 - 5.266.7 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.270 - 5.276.4 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.260 - 5.266.7 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz																																																																																																																																																																	
5.266.7 MHz or more: 2.5 μ V/MHz	5.266.7 MHz or more: 2.5 μ V/MHz	5.276.4 MHz or more: 2.5 μ V/MHz	5.266.7 MHz or more: 2.5 μ V/MHz																																																																																																																																																																	
f = 5MHz, Difference from 5240 (dBHz)	f = 5MHz, Difference from 5240 (dBHz)	f = 5MHz, Difference from 5230 (dBHz)	f = 5MHz, Difference from 5210 (dBHz)																																																																																																																																																																	
W53																																																																																																																																																																				
20MHz system		40MHz system	80MHz system																																																																																																																																																																	
OBW: 18MHz or less	OBW: 18 - 20 MHz																																																																																																																																																																			
5.233.3 MHz or less: 2.5 μ V/MHz	5.233.3 MHz or less: 2.5 μ V/MHz	5.221.6 MHz or less: 2.5 μ V/MHz	5.233.3 MHz or less: 2.5 μ V/MHz																																																																																																																																																																	
5.233.3 - 5.240 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.233.3 - 5.240 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.221.6 - 5.230 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.233.3 - 5.210 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz																																																																																																																																																																	
5.240 - 5.249 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.240 - 5.249 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.230 - 5.240 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.210 - 5.249 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz																																																																																																																																																																	
5.249 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.249 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.240 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.240 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz																																																																																																																																																																	
5.350 MHz or more: 2.5 μ V/MHz	5.350 MHz or more: 2.5 μ V/MHz	5.350 - 5.356.4 MHz: 15 μ V/MHz	5.350 - 5.375.8 MHz: 15 μ V/MHz																																																																																																																																																																	
f = 5MHz, Difference from 5200 (dBHz)	f = 5MHz, Difference from 5200 (dBHz)	f = 5MHz, Difference from 5270 (dBHz)	f = 5MHz, Difference from 5230 (dBHz)																																																																																																																																																																	
W56																																																																																																																																																																				
20MHz system		40MHz system	80MHz system																																																																																																																																																																	
DSSS, etc.	OFDM																																																																																																																																																																			
5.470 MHz or less: 12.5 μ V/MHz	5.460 MHz or less: 2.5 μ V/MHz	5.460 MHz or less: 12.5 μ V/MHz	5.460 MHz or less: 12.5 μ V/MHz																																																																																																																																																																	
	5.460 - 5.470 MHz: 12.5 μ V/MHz	5.460 - 5.470 MHz: 50 μ V/MHz	5.460 - 5.465 MHz: 50 μ V/MHz																																																																																																																																																																	
5.730 MHz or more: 12.5 μ V/MHz	5.745 - 5.765 MHz: 12.5 μ V/MHz	5.770 MHz or more: 12.5 μ V/MHz	5.465.5 - 5.470 MHz: 51.2 μ V/MHz																																																																																																																																																																	
	Over 5.765 MHz: 2.5 μ V/MHz		5.770 MHz or more: 12.5 μ V/MHz																																																																																																																																																																	
W52 + W53	W56	* A rated value is defined by the E.I.R.P.																																																																																																																																																																		
100MHz system		* Measurement range: 30MHz to 26GHz																																																																																																																																																																		
5.099.8 MHz or less: 2.5 μ V/MHz	5.410.8 MHz or less: 12.5 μ V/MHz																																																																																																																																																																			
5.099.8 - 5.150 MHz: 15 μ V/MHz	5.410.8 - 5.470 MHz: 50 μ V/MHz																																																																																																																																																																			
5.350 - 5.400.4 MHz: 15 μ V/MHz	5.720 MHz or more: 12.5 μ V/MHz																																																																																																																																																																			
5.400.4 MHz or more: 2.5 μ V/MHz																																																																																																																																																																				
5.210GHz & (5.530GHz, 5.610GHz or 5.690GHz)	5.290GHz & (5.530GHz, 5.610GHz or 5.690GHz)	5.530GHz & 5.690GHz																																																																																																																																																																		
80MHz + 80MHz system (that adjacent radio)																																																																																																																																																																				
5.124.8 MHz or less: 2.5 μ V/MHz	5.214.8 MHz or less: 2.5 μ V/MHz	5.410.8 MHz or less: 12.5 μ V/MHz																																																																																																																																																																		
5.124.8 - 5.150 MHz: 15.0 μ V/MHz	5.214.8 - 5.240 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.410.8 - 5.470 MHz: 50 μ V/MHz																																																																																																																																																																		
5.250 - 5.251 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.240 - 5.250 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.770 MHz or more: 15 μ V/MHz																																																																																																																																																																		
5.251 - 5.265.2 MHz: $10^{-17} \cdot f^{1.75} \mu$ V/MHz	5.350 - 5.365.2 MHz: 15 μ V/MHz																																																																																																																																																																			
5.265.2 - 5.370 MHz: 2.5 μ V/MHz	5.365.2 - 5.410 MHz: 2.5 μ V/MHz																																																																																																																																																																			
2.5 μ V/MHz (When used)																																																																																																																																																																				
5.370 - 5.454.8 MHz: 15 μ V/MHz	5.410 - 5.454.8 MHz: 15 μ V/MHz																																																																																																																																																																			
5.454.8 - 5.470 MHz: 15 μ V/MHz	5.454.8 - 5.470 MHz: 15 μ V/MHz																																																																																																																																																																			
5.730 MHz or more: 15 μ V/MHz	5.730 MHz or more: 15 μ V/MHz																																																																																																																																																																			
5.770 MHz or more: 15 μ V/MHz	5.770 MHz or more: 15 μ V/MHz																																																																																																																																																																			
f = 5MHz, Difference from 5210 (dBHz)	f = 5MHz, Difference from 5230 (dBHz)																																																																																																																																																																			
Test Method:	<table><tr><td colspan="2">[Setting 1]</td></tr><tr><td>Frequency range:</td><td>Test frequency range as required</td></tr><tr><td>RBW:</td><td>1 MHz</td></tr><tr><td>VBW:</td><td>1 MHz</td></tr><tr><td>Sweep time:</td><td>Minimum time required to make an accurate measurement</td></tr><tr><td>Sweep Data Points:</td><td>1001 or greater</td></tr><tr><td>Detector mode:</td><td>Positive peak</td></tr><tr><td>Indication mode:</td><td>Max hold (see Note 1)</td></tr><tr><td>Note 1:</td><td>Sweep shall be repeated until the max hold waveform is stable.</td></tr><tr><td colspan="2"> </td></tr><tr><td colspan="2">[Setting 2]</td></tr><tr><td>Center frequency:</td><td>Frequency of spurious emission found using [Setting 1]</td></tr><tr><td>Span:</td><td>0 Hz</td></tr><tr><td>RBW:</td><td>1 MHz</td></tr><tr><td>VBW:</td><td>1 MHz</td></tr><tr><td>Sweep time:</td><td>Minimum time required to make an accurate measurement. For burst type (intermittent) spurious emissions, sweep time shall be greater than one burst interval</td></tr></table>			[Setting 1]		Frequency range:	Test frequency range as required	RBW:	1 MHz	VBW:	1 MHz	Sweep time:	Minimum time required to make an accurate measurement	Sweep Data Points:	1001 or greater	Detector mode:	Positive peak	Indication mode:	Max hold (see Note 1)	Note 1:	Sweep shall be repeated until the max hold waveform is stable.			[Setting 2]		Center frequency:	Frequency of spurious emission found using [Setting 1]	Span:	0 Hz	RBW:	1 MHz	VBW:	1 MHz	Sweep time:	Minimum time required to make an accurate measurement. For burst type (intermittent) spurious emissions, sweep time shall be greater than one burst interval																																																																																																																																	
[Setting 1]																																																																																																																																																																				
Frequency range:	Test frequency range as required																																																																																																																																																																			
RBW:	1 MHz																																																																																																																																																																			
VBW:	1 MHz																																																																																																																																																																			
Sweep time:	Minimum time required to make an accurate measurement																																																																																																																																																																			
Sweep Data Points:	1001 or greater																																																																																																																																																																			
Detector mode:	Positive peak																																																																																																																																																																			
Indication mode:	Max hold (see Note 1)																																																																																																																																																																			
Note 1:	Sweep shall be repeated until the max hold waveform is stable.																																																																																																																																																																			
[Setting 2]																																																																																																																																																																				
Center frequency:	Frequency of spurious emission found using [Setting 1]																																																																																																																																																																			
Span:	0 Hz																																																																																																																																																																			
RBW:	1 MHz																																																																																																																																																																			
VBW:	1 MHz																																																																																																																																																																			
Sweep time:	Minimum time required to make an accurate measurement. For burst type (intermittent) spurious emissions, sweep time shall be greater than one burst interval																																																																																																																																																																			

	Sweep Data Points:	1001 or greater
	Detector mode:	Sample
Procedure:	(1) After configuring the spectrum analyzer to [Setting 1], search for spurious emissions from 30 MHz to 12.5 GHz. If the sweep range does not cover the required measurement frequency range then the measurement range will need to be divided into sufficient sections of size [RBW x Sweep Data Points]. If spurious emissions greater than [Limit - 3dB] are found, then more detailed measurements are required, go to step (2) (2) Configure the spectrum analyzer using [Setting 2] and measure the average signal amplitude. If the spurious emission is burst type (intermittent), then the average value shall not include signal OFF time. (3) Calculate the spurious emission value (Calculated Value) using following the formula below: Calculated Value = (Measured Value using (3) + 15.2dB) Note: 15.2dB adjustment is derived from the Conversion Factor of RBW Conversion Factor of RBW = 10 x Log (Reference Bandwidth / RBW of measurement) = 15.2 [dB] Where: Reference Bandwidth = 1 MHz RBW of measurement = 30 kHz (4) If the calculated value using (4) is over the Limit (section 6.7), go to (6) (6) Configure the spectrum analyzer to [Setting 3] then make the following changes: Frequency: Frequency of spurious emission Span: 1 MHz (6) After sweep, send the span data set to the PC (7) Convert measured data from dBm to Watts (8) Sum all the data using the formula below. If the sum is within the limit, the test result is Pass, otherwise, Fail $P_s = \left(\sum_{i=1}^n E_i \right) \times \frac{S_w}{RBW \times k \times n}$ Ps: Sum (Watts) Ei: Measured value at each point in the Span (Watts) Sw: Span (1MHz) n: Number of measurement points in the Span k: Correction factor for Equivalent Noise Bandwidth, specific to each spectrum analyzer, check the instrument user guide RBW: Resolution Bandwidth (MHz). (9) If the EUT has multiple antennas, measure the spurious emission form each individual antenna using steps (1) through (9) (10) Convert the individual antenna spurious level measurements (step (10)) from dB to absolute values (11) Combine (sum) the absolute values of the spurious measurements at each frequency for each antenna (to create a single composite spectrum of spurious emissions) (12) Ensure that the composite spectrum does not exceed the Limit defined in 6.7 (Technical Standard) (13) Configuring the spectrum analyzer using [Setting 3] and measure the spurious emissions with all the antennas electrically combined	

4.6.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.8 °C	Humidity:	49 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM1, TM2, TM3, TM4, TM5, TM6				
Final test mode:	TM1, TM2, TM3, TM4, TM5, TM6				

4.6.2 Test Setup Diagram:

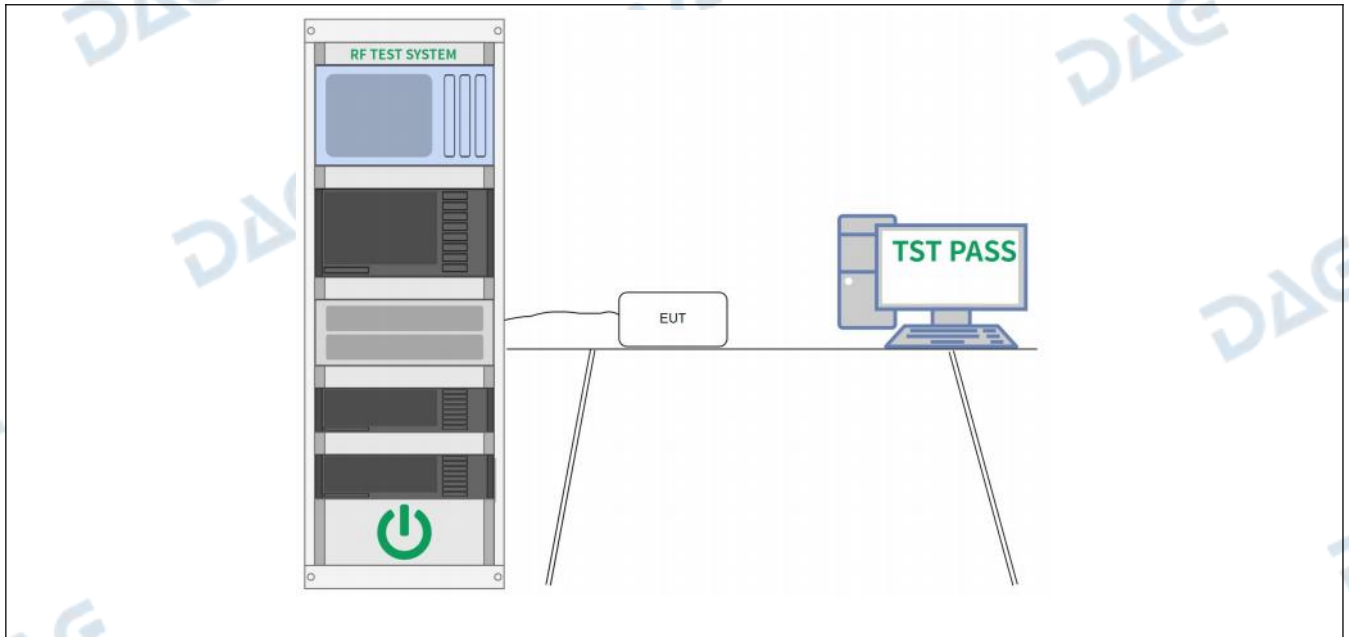

4.6.3 Test Data:

Please Refer to Appendix for Details.

4.7 Secondary Radiated Emissions


Test Requirement:	Article 2-1, Item 19-3		
Test Limit:	(1) Below 1 GHz: 4 nW (-54dBm) or less (2) Above 1 GHz: 20 nW (-47dBm) or less		
Test Method:	[Setting 1]		
	Frequency range:	30 MHz ~ 12.5 GHz	
	RBW:	Below 1 GHz:100 kHz	
		Above 1 GHz:1 MHz	
	VBW:	Below 1 GHz:100 kHz	
		Above 1 GHz:1 MHz	
	Sweep time:	Auto	
	Sweep data points:	1001 or greater	
	Detector mode:	Positive peak	
	Indication mode:	Max hold	
	[Setting 2]		
	Center Frequency:	Frequency of spurious emission found using [Setting 1]	
	Span:	0 Hz	
	RBW:	Below 1 GHz:100 kHz	
		Above 1 GHz:1 MHz	
	VBW:	Below 1 GHz:100 kHz	
		Above 1 GHz:1 MHz	
	Sweep time:	Auto	
	Sweep data points:	1001 or greater	
	Detector mode:	Sample	
	Procedure:	(1) Configure the spectrum analyzer to [Setting 1] and then search for spurious emissions in the range 30 MHz to 12.5GHz. If the sweep range does not cover the required measurement frequency range then the measurement range will need to be divided into sufficient sections of size [RBW x Sweep Data Points]. (2) If spurious emissions are found with an amplitude greater than [Limit - 10dB] then perform further detailed measurements as described in (3) (3) Configure the spectrum analyzer using [Setting 2] and measure the average signal amplitude. If the spurious emission is burst type (intermittent), then the average value shall not include signal OFF time Multiple Antenna Systems If the EUT has multiple antennas then emissions from each antenna shall be measured individually, as described below (4) For each antenna repeat steps (1) through (3). Convert all spurious level measurements from dB to absolute value (5) Combine (sum) the absolute values of the spurious measurements at each frequency for each antenna (to create a single composite spectrum of spurious emissions) (6) Ensure that the composite spectrum does not exceed the Limit	

4.7.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.8 °C	Humidity:	49 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM1, TM2, TM3, TM4, TM5, TM6				

Final test mode:	TM1, TM2, TM3, TM4, TM5, TM6
------------------	------------------------------

4.7.2 Test Setup Diagram:

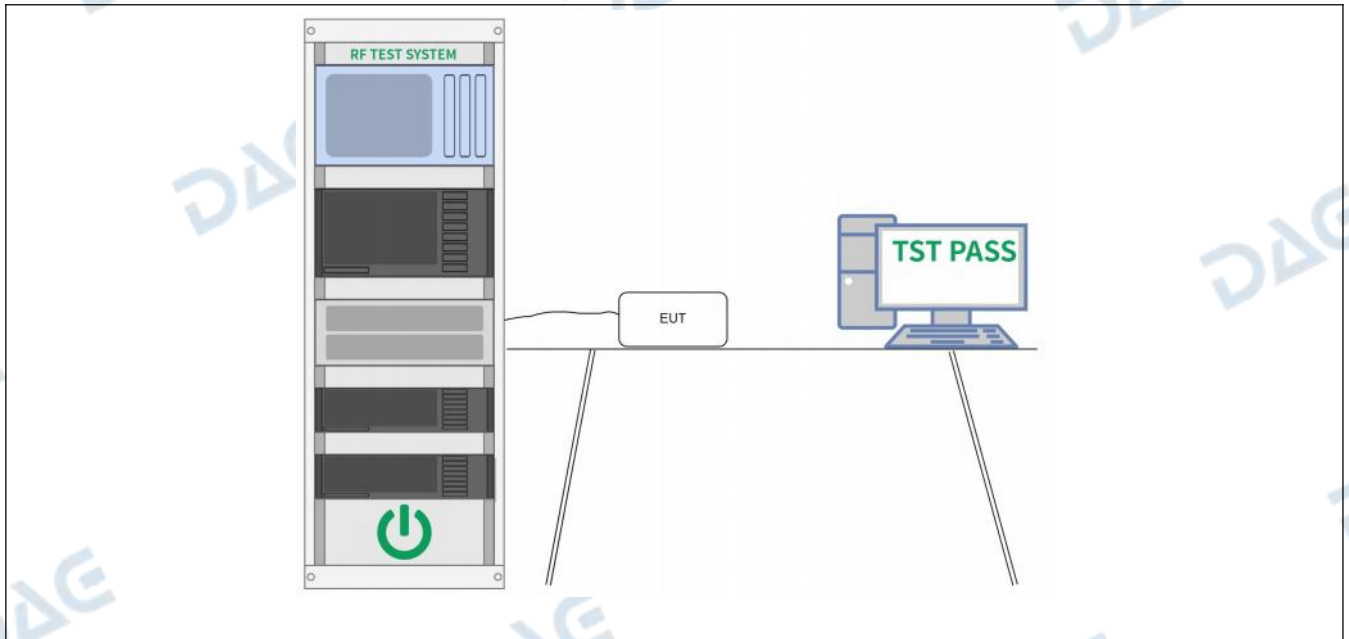

4.7.3 Test Data:

Please Refer to Appendix for Details.


4.8 Carrier Sensing 1

Test Requirement:	Article 2-1, Item 19-3		
Test Limit:	Field intensity in the direction of the maximum gain of a receiving antenna : 100mV/m		
	*Start transmission after performing a carrier sense. However, when transmission and reception are controlled from other radio equipment, and when the radio equipment which performed transmission resumes transmission within 8 millisecond after a career sense, it can omit performing a career sense.		
Test Method:	Signal Generator Settings		
	[Setting 1]		
	Output frequency:	Center of test frequency	
	Modulation:	Un-modulated, see note	
	Output level:	The required level at the EUT antenna input, as defined by the applicant	
	Note:		
	If the EUT's carrier sensing cannot function with an un-modulated signal at the center of the test frequency, then the un-modulated signal can be moved away from the center.		
	Spectrum Analyzer Settings		
	[Setting 2]		
	Frequency:	Center of test frequency	
	Span:	50 MHz	
	RBW:	1 MHz	
	VBW:	1 MHz	
	Trigger:	Free running	
	Detector:	Positive peak	
Procedure:	Testing without a Link Partner (1) Set the spectrum analyzer to [Setting 2] (2) With the signal generator OFF, set the EUT to transmit mode (3) Set the EUT to receive mode (4) First, set the signal generator output ON, then set the EUT to transmit mode and confirm that the EUT does NOT transmit a signal		
	Testing with a Link Partner (1) Set the spectrum analyzer to [Setting 2] (2) Set the signal generator output to OFF (3) After establishing a connection between the EUT and the Link Partner, set the EUT to transmit mode (4) Set the EUT to receive mode (5) Set the signal generator output ON, then set the EUT to transmit mode and confirm that the EUT does NOT transmit a signal		

4.8.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.8 °C	Humidity:	49 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM4, TM5, TM6				
Final test mode:	TM4, TM5, TM6				

4.8.2 Test Setup Diagram:

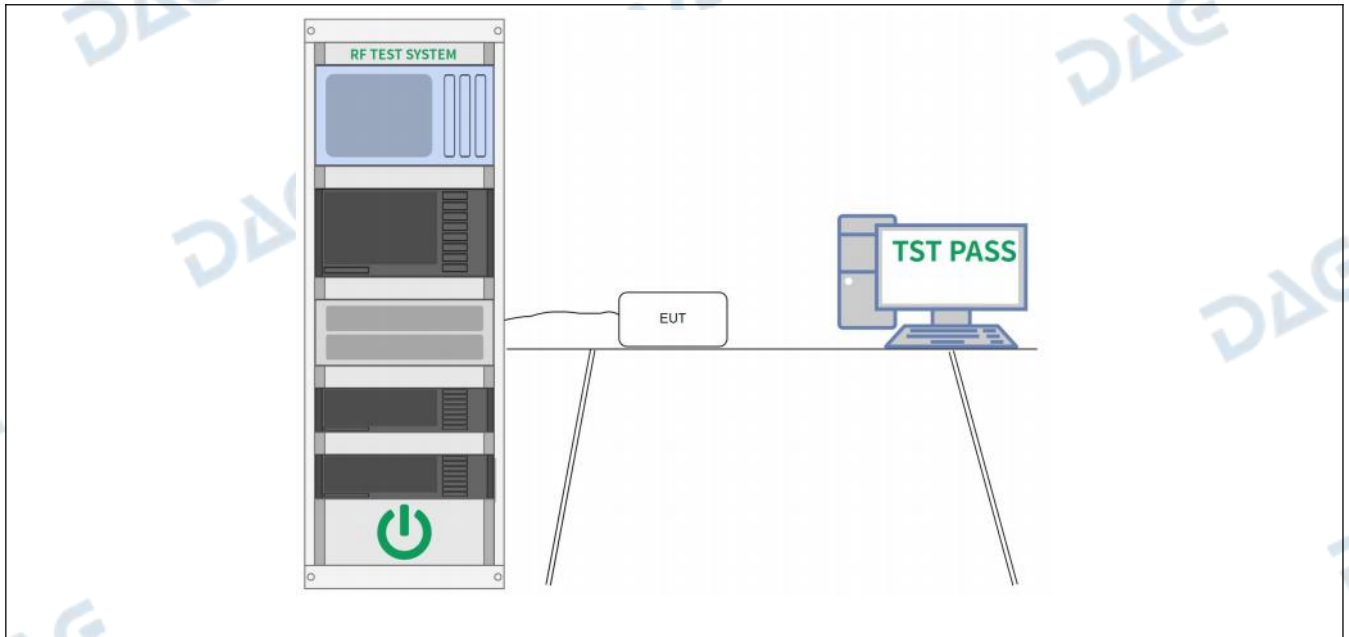

4.8.3 Test Data:

Condition	Antenna	Mode	Frequency (MHz)	PCS(dbm)	CF(db)	SG level	Result
NVNT	ANT1	802.11a	5180	-49.45	6.00	-43.45	Pass
NVNT	ANT1	802.11a	5240	-49.55	6.07	-43.48	Pass
NVNT	ANT1	802.11n(HT20)	5180	-49.45	6.00	-43.45	Pass
NVNT	ANT1	802.11n(HT20)	5240	-49.55	6.07	-43.48	Pass
NVNT	ANT1	802.11n(HT40)	5190	-49.46	6.06	-43.40	Pass
NVNT	ANT1	802.11n(HT40)	5230	-45.51	5.99	-39.52	Pass
NVNT	ANT1	802.11ac(VHT40)	5190	-49.46	6.06	-43.40	Pass
NVNT	ANT1	802.11ac(VHT40)	5230	-45.51	5.99	-39.52	Pass
NVNT	ANT1	802.11n(HT40)	5270	-45.62	6.03	-39.59	Pass
NVNT	ANT1	802.11n(HT40)	5310	-45.62	6.03	-39.59	Pass
NVNT	ANT1	802.11n(HT80)	5290	-45.65	6.02	-39.63	Pass
NVNT	ANT1	802.11n(HT20)	5500	-45.99	6.22	-39.77	Pass
NVNT	ANT1	802.11n(HT20)	5600	-46.15	6.2	-39.95	Pass
NVNT	ANT1	802.11n(HT20)	5720	-46.14	6.37	-39.77	Pass
NVNT	ANT1	802.11ac(VHT20)	5500	-45.99	6.22	-39.77	Pass
NVNT	ANT1	802.11ac(VHT20)	5600	-46.15	6.2	-39.95	Pass
NVNT	ANT1	802.11ac(VHT20)	5720	-46.14	6.37	-39.77	Pass
NVNT	ANT1	802.11n(HT40)	5510	-45.83	6.17	-39.66	Pass
NVNT	ANT1	802.11n(HT40)	5590	-45.79	6.21	-39.58	Pass
NVNT	ANT1	802.11n(HT40)	5710	-46.17	6.49	-39.68	Pass
NVNT	ANT1	802.11ac(VHT40)	5510	-45.83	6.17	-39.66	Pass
NVNT	ANT1	802.11ac(VHT40)	5590	-45.79	6.21	-39.58	Pass
NVNT	ANT1	802.11ac(VHT40)	5710	-46.17	6.49	-39.68	Pass
NVNT	ANT1	802.11n(HT80)	5610	-45.98	6.24	-39.74	Pass
NVNT	ANT1	802.11n(HT80)	5690	-45.82	6.52	-39.30	Pass
NVNT	ANT1	802.11ac(VHT80)	5610	-45.98	6.24	-39.74	Pass
NVNT	ANT1	802.11ac(VHT80)	5690	-45.82	6.52	-39.30	Pass

Note: $PCS = 22.79 + G - 20 \cdot \log(F)$, G= antenna gain, F= transmission frequency, CF=splitter loss + cable loss


4.9 Transmission Burst Length

Test Requirement:	Article 2-1, Item 19-3
Test Limit:	8ms or less
Test Method:	Frequency: Center of tested frequency Span:0 Hz RBW: 1 MHz VBW: 1 MHz Sweep time: Auto Sweep data points: 1001 or greater Detector mode: Sample
Procedure:	Configure the spectrum analyzer to [Setting 1] and then search the max pulse, and measure the transmission time.

4.9.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.8 °C	Humidity:	49 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM1, TM2, TM3, TM4, TM5, TM6				
Final test mode:	TM1, TM2, TM3, TM4, TM5, TM6				

4.9.2 Test Setup Diagram:

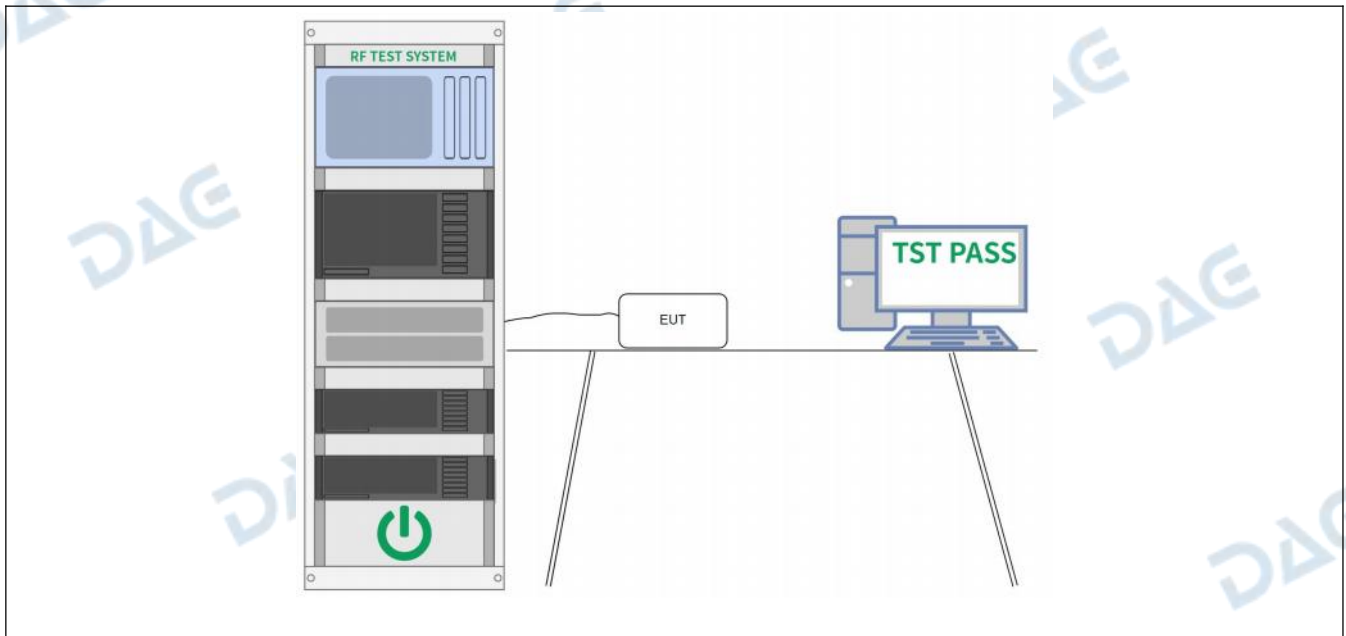

4.9.3 Test Data:

Please Refer to Appendix for Details.

5 TEST SETUP PHOTOS



6 PHOTOS OF THE EUT

External

















Internal




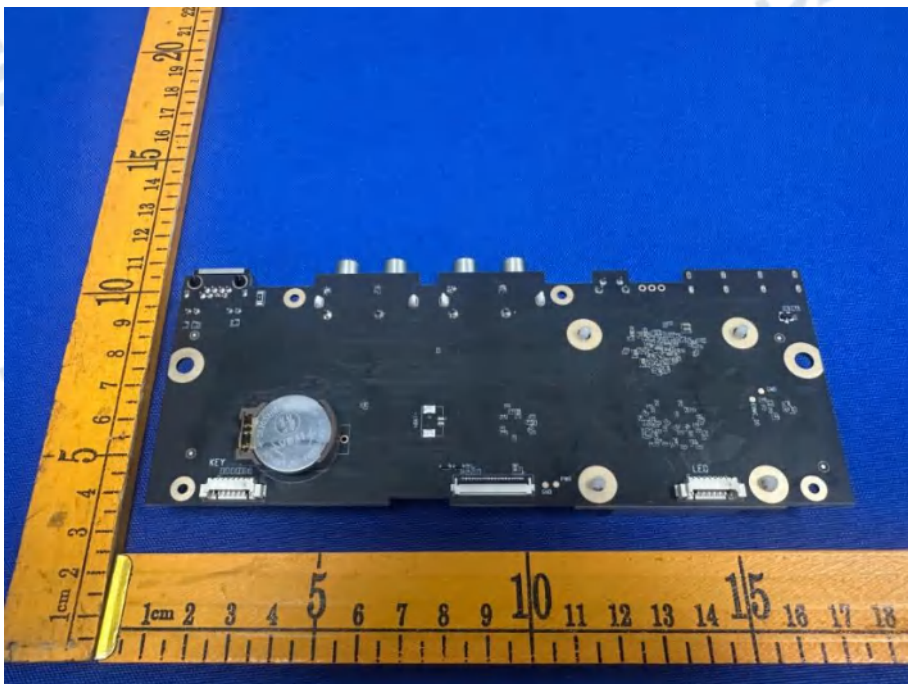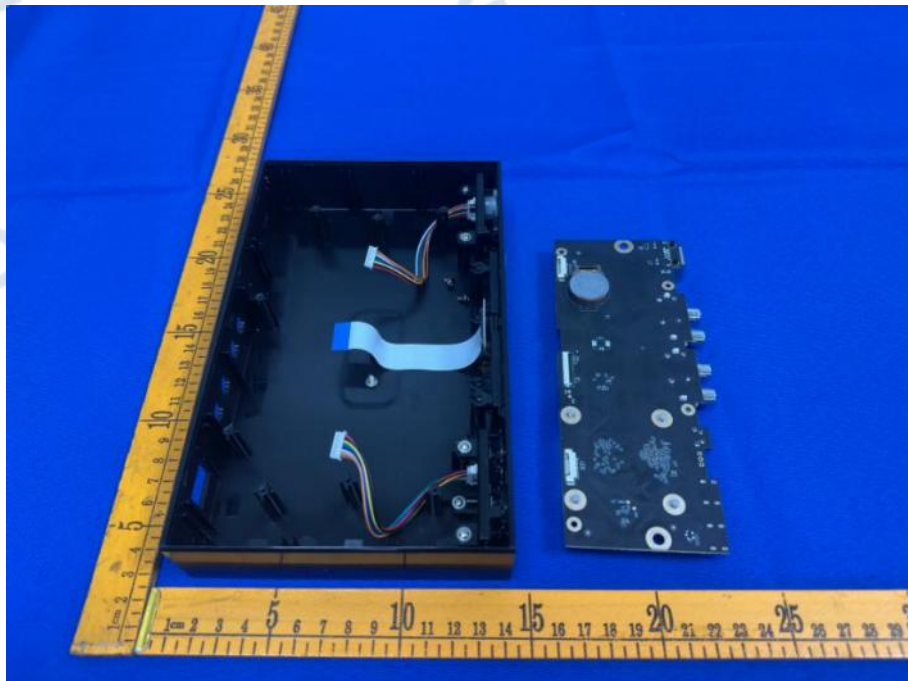

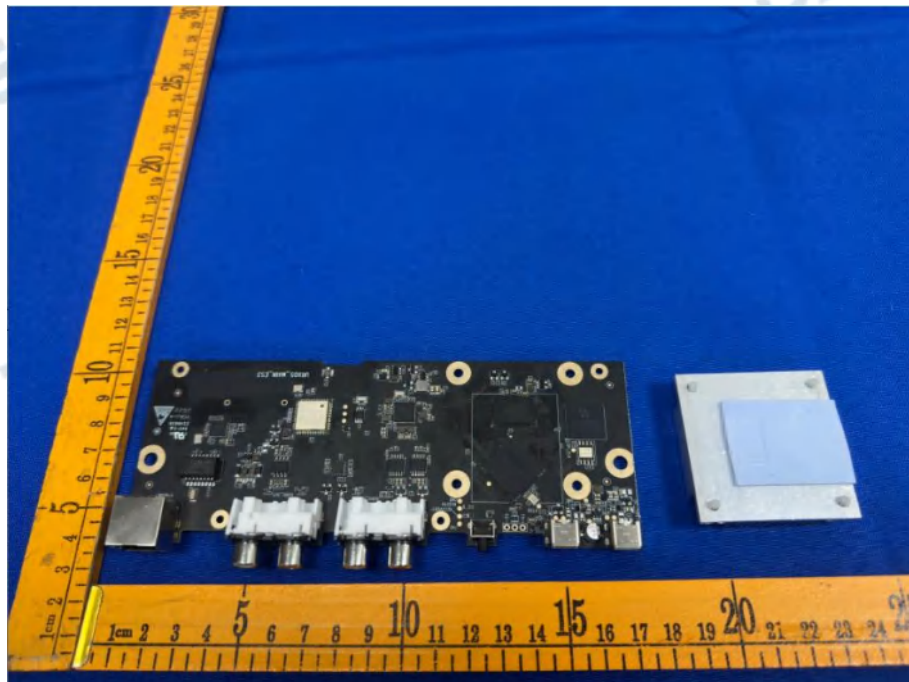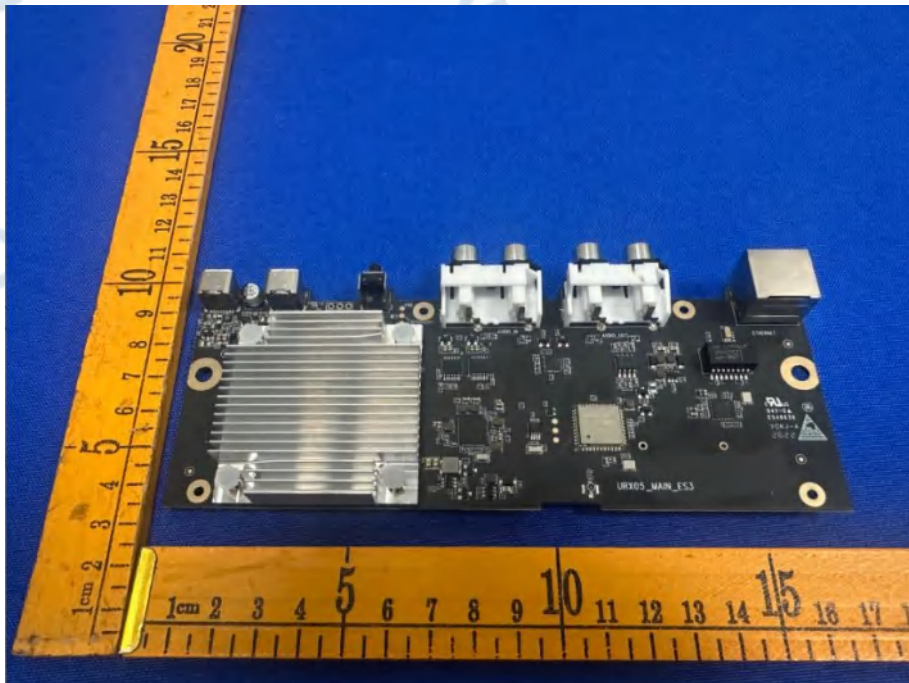

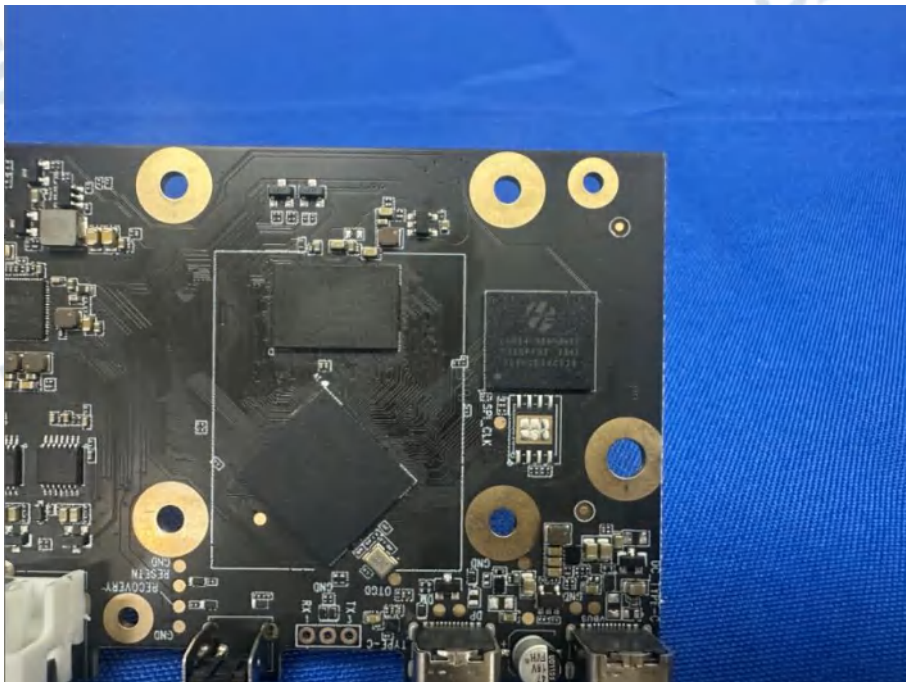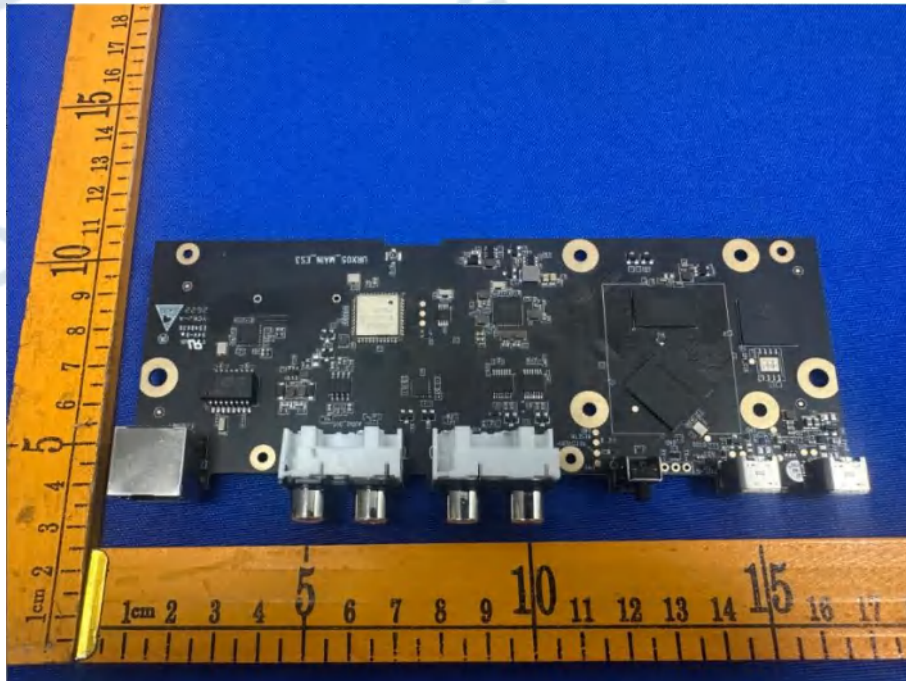

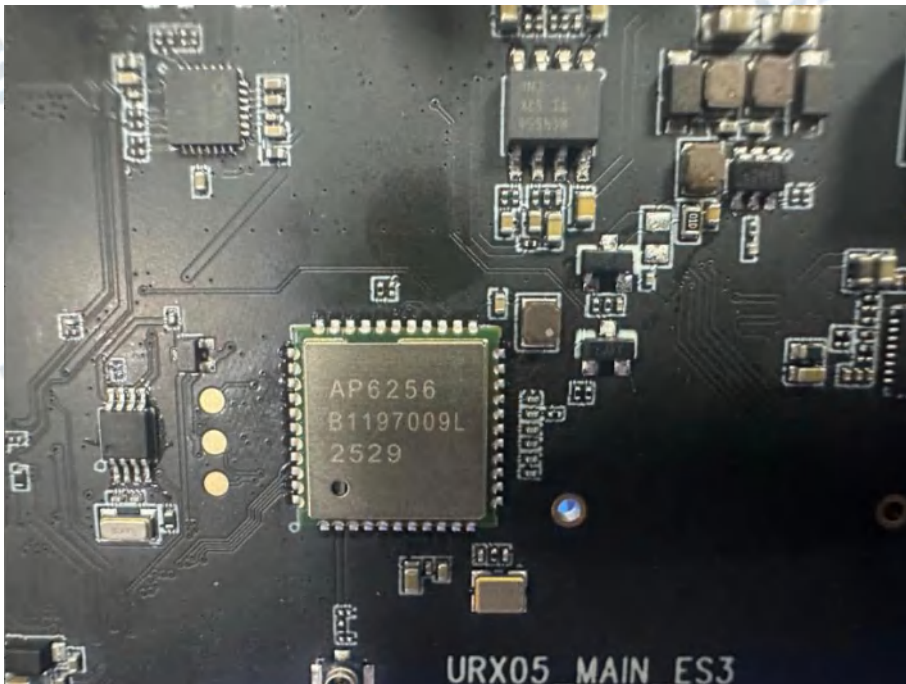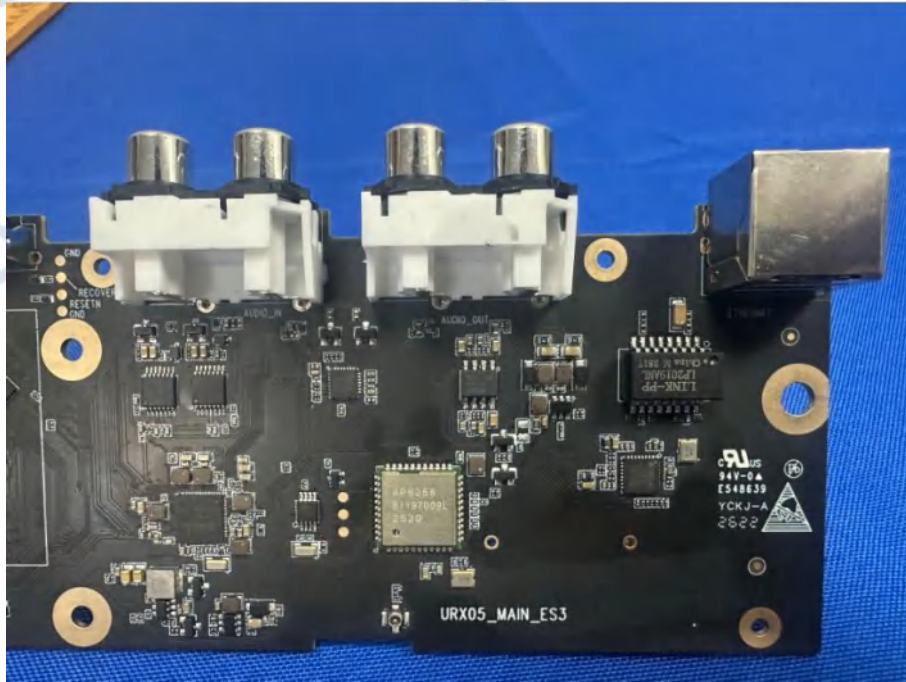

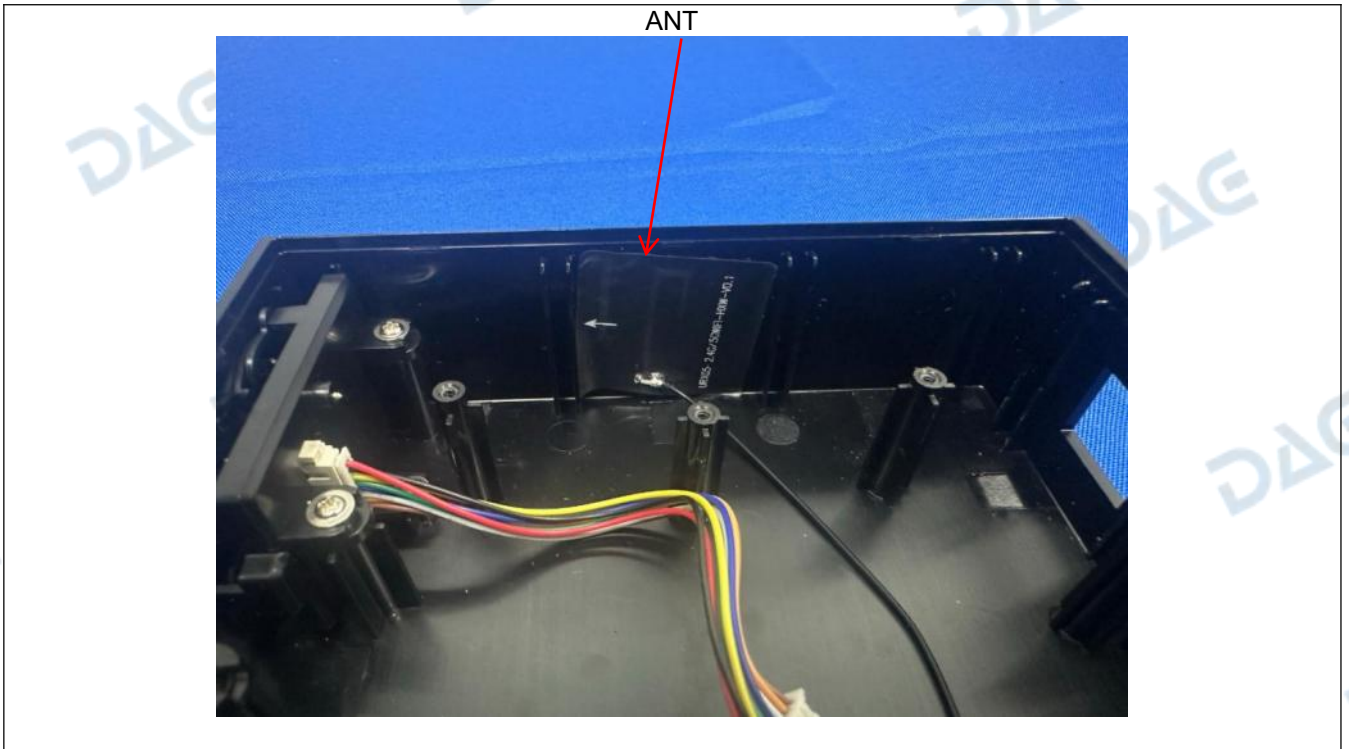

Appendix-5.2g

HT260424005---URX-05--MIC-5.24GWIFI

MIC_5.2G_WIFI (Item_19-3) Test Data

1. Occupied Frequency Bandwidth

Condition	Antenna	Mode	Frequency(MHz)	Occupied Bandwidth(MHz)	Limit(MHz)	Result
NVNT	ANT1	802.11a	5180.00	16.55	20	Pass
NVNT	ANT1	802.11a	5200.00	16.89	20	Pass
NVNT	ANT1	802.11a	5240.00	17.12	20	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	17.97	20	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	17.99	20	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	18.12	20	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	18.07	20	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	17.97	20	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	18.24	20	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	36.11	40	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	36.13	40	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	36.15	40	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	36.21	40	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	75.20	80	Pass

Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11a_5180




Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11a_5200



Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11a_5240




Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11n(HT20)_5180

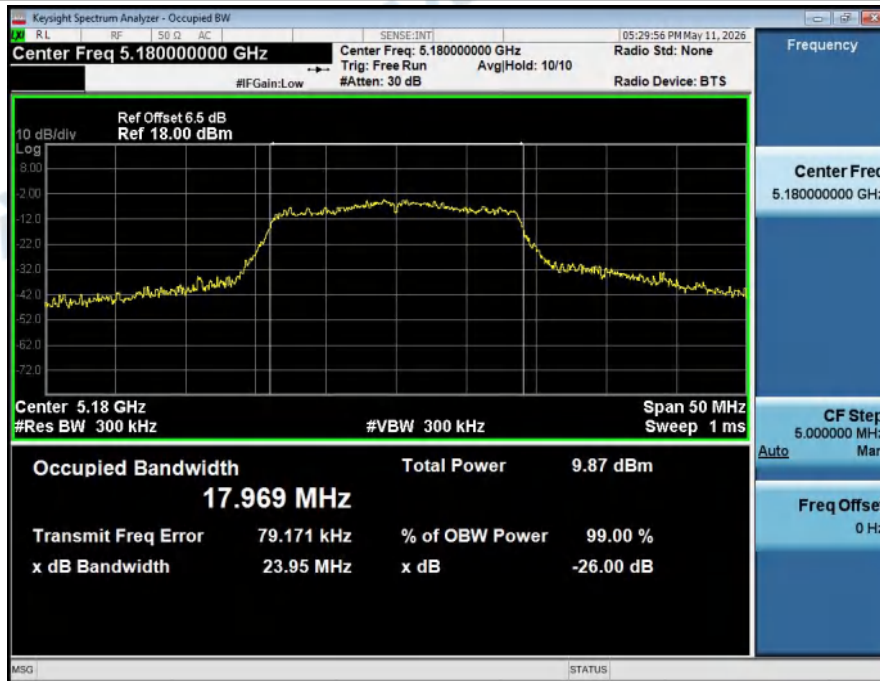

Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11n(HT20)_5200




Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11n(HT20)_5240

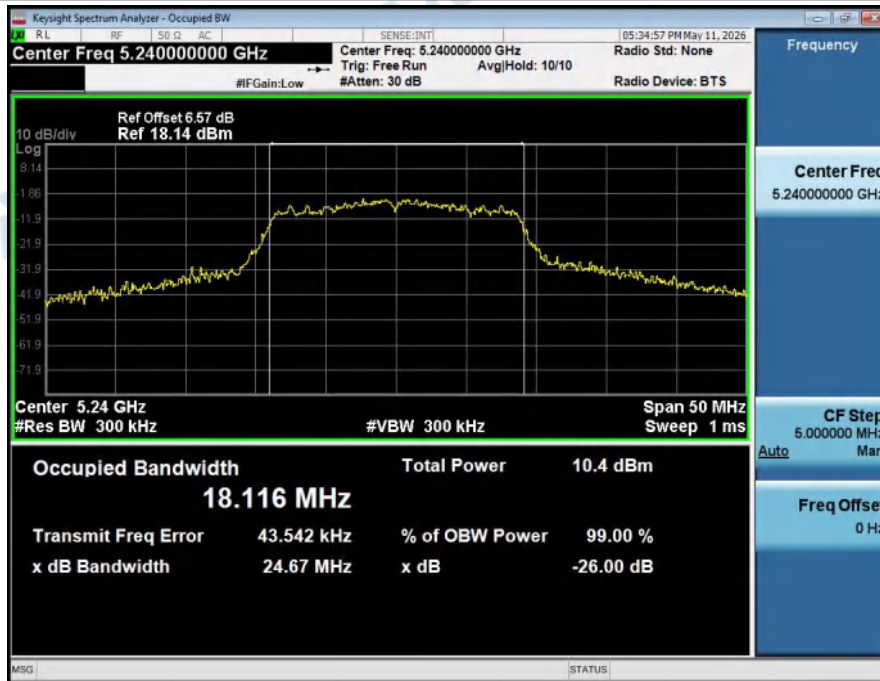


Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11ac(VHT20)_5180




Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11ac(VHT20)_5200

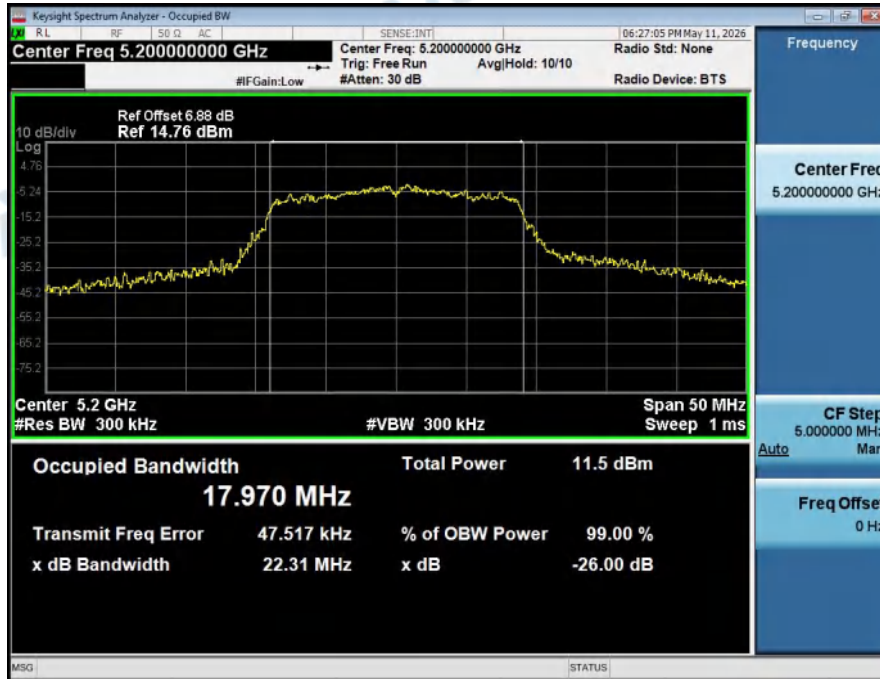

Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11ac(VHT20)_5240

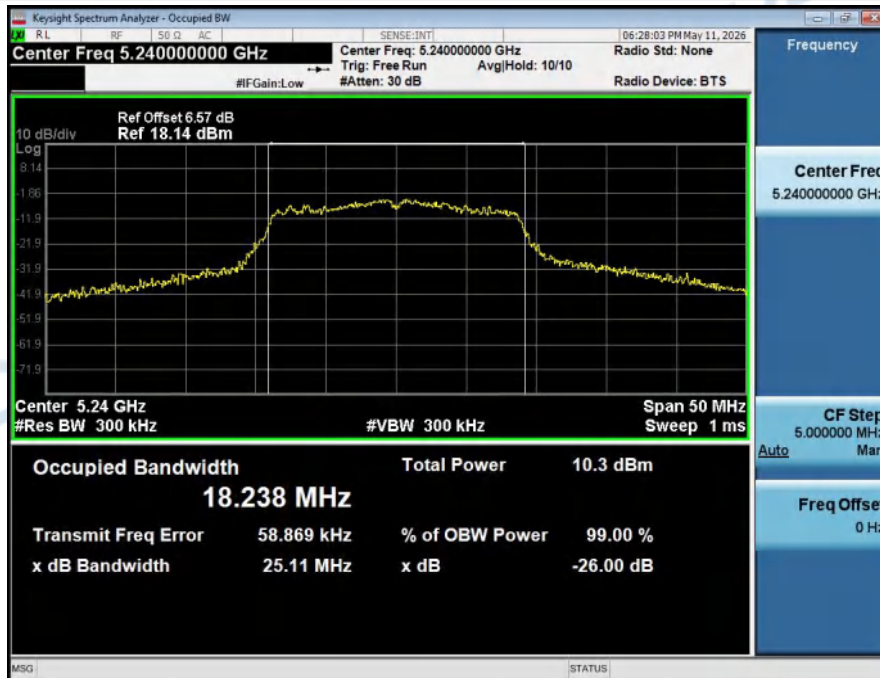


Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11n(HT40)_5190

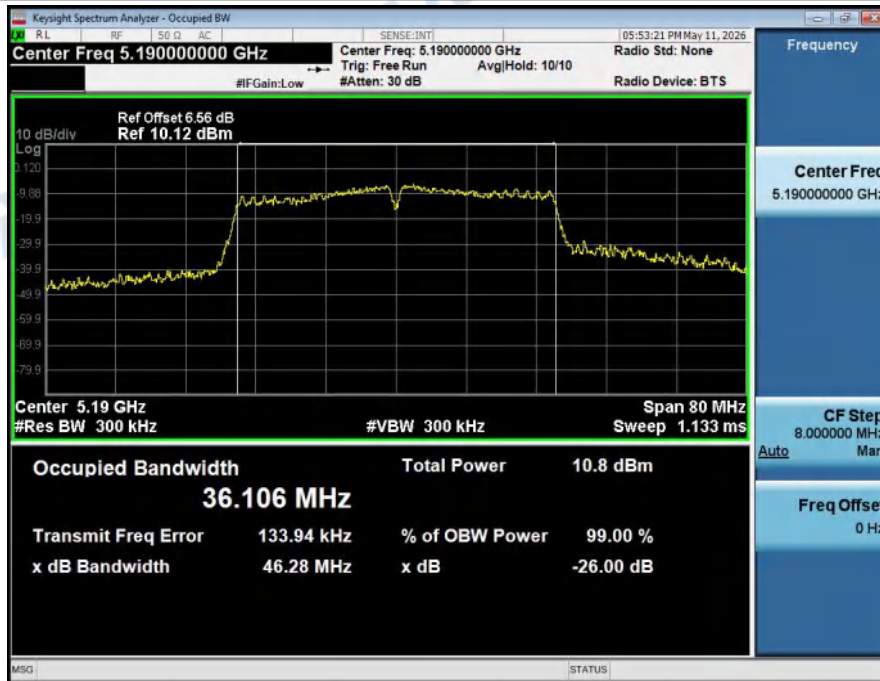

Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11n(HT40)_5230




Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11ac(VHT40)_5190

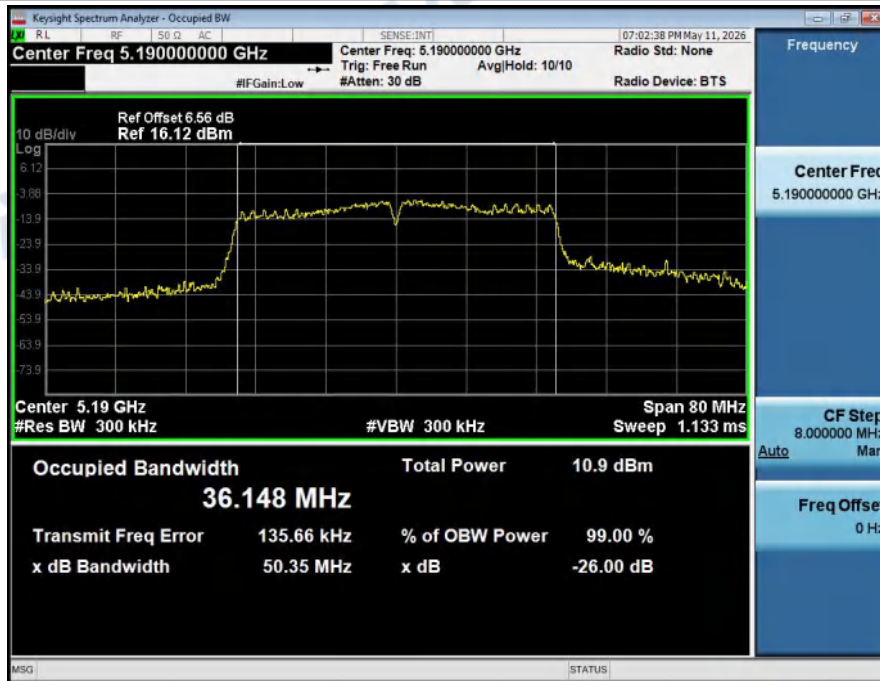

Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11ac(VHT40)_5230



Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11ac(VHT80)_5210

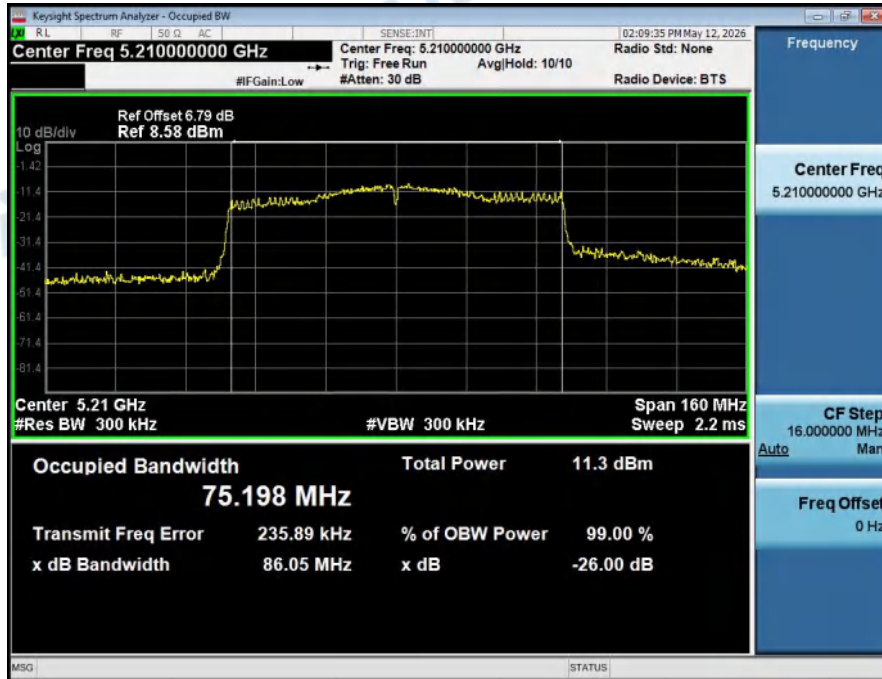

2. Spread Spectrum Bandwidth

Condition	Antenna	Mode	Frequency(MHz)	Spread Spectrum Bandwidth(MHz)
NVNT	ANT1	802.11a	5180.00	14.26
NVNT	ANT1	802.11a	5200.00	14.02
NVNT	ANT1	802.11a	5240.00	14.05
NVNT	ANT1	802.11n(HT20)	5180.00	15.11
NVNT	ANT1	802.11n(HT20)	5200.00	14.89
NVNT	ANT1	802.11n(HT20)	5240.00	15.07
NVNT	ANT1	802.11ac(VHT20)	5180.00	15.10
NVNT	ANT1	802.11ac(VHT20)	5200.00	15.03
NVNT	ANT1	802.11ac(VHT20)	5240.00	15.07
NVNT	ANT1	802.11n(HT40)	5190.00	31.17
NVNT	ANT1	802.11n(HT40)	5230.00	31.63
NVNT	ANT1	802.11ac(VHT40)	5190.00	31.29
NVNT	ANT1	802.11ac(VHT40)	5230.00	31.53
NVNT	ANT1	802.11ac(VHT80)	5210.00	62.07

Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11a_5180




Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11a_5200



Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11a_5240




Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11n(HT20)_5180

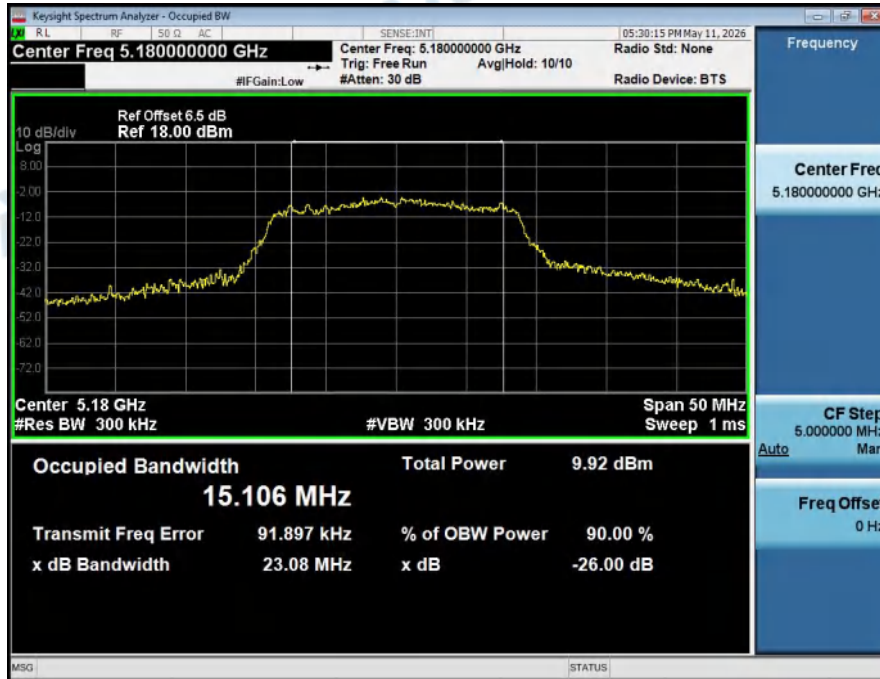

Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11n(HT20)_5200




Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11n(HT20)_5240

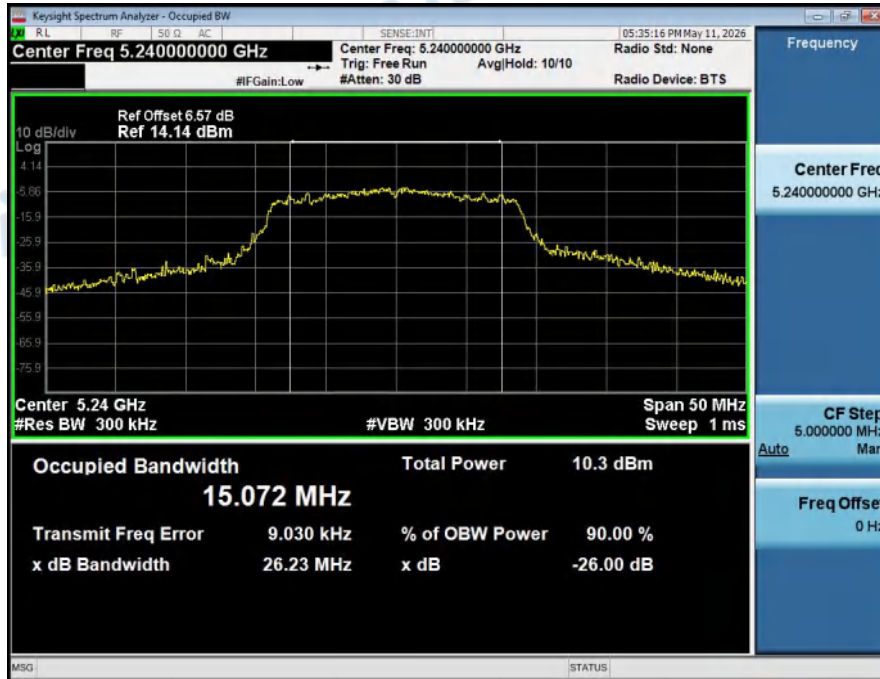

Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11ac(VHT20)_5180




Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11ac(VHT20)_5200

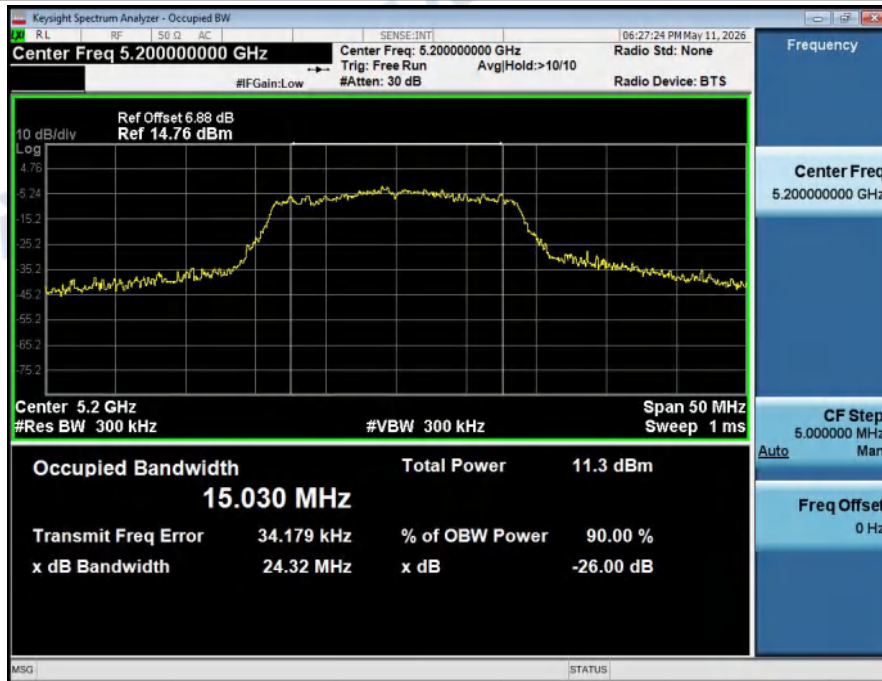


Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11ac(VHT20)_5240




Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11n(HT40)_5190

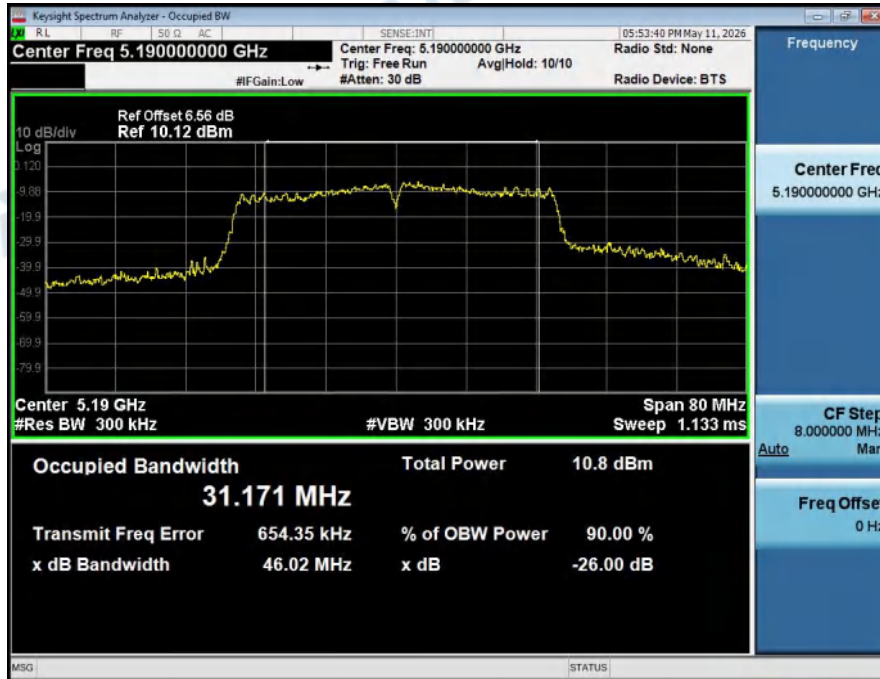

Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11n(HT40)_5230

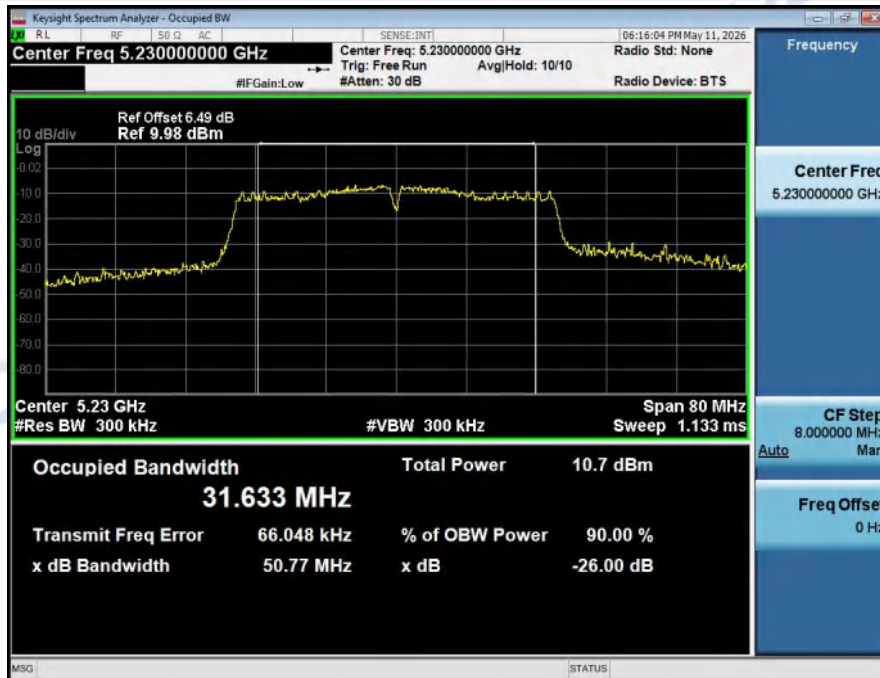


Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11ac(VHT40)_5190

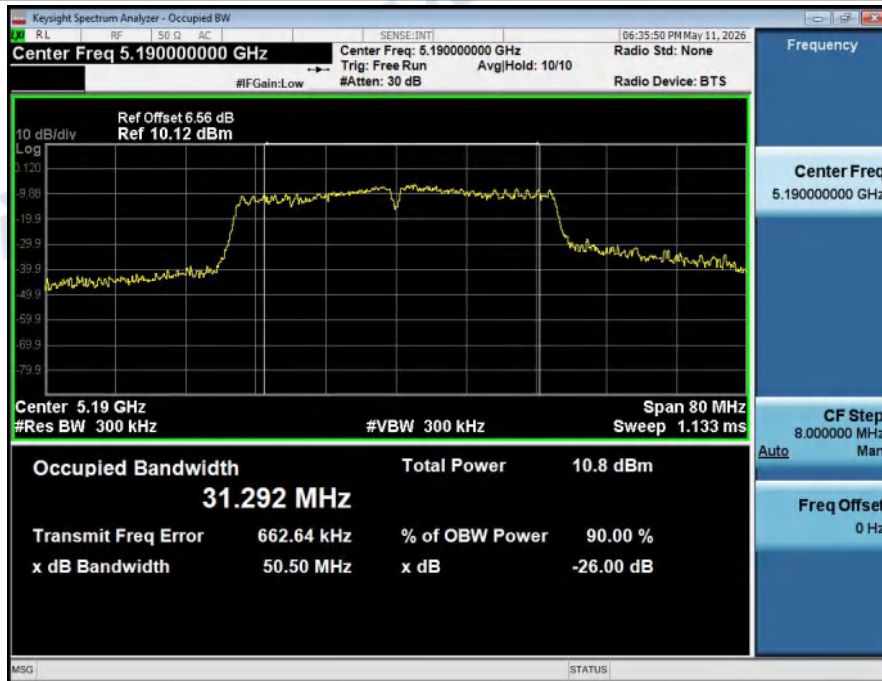

Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11ac(VHT40)_5230




Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11ac(VHT80)_5210

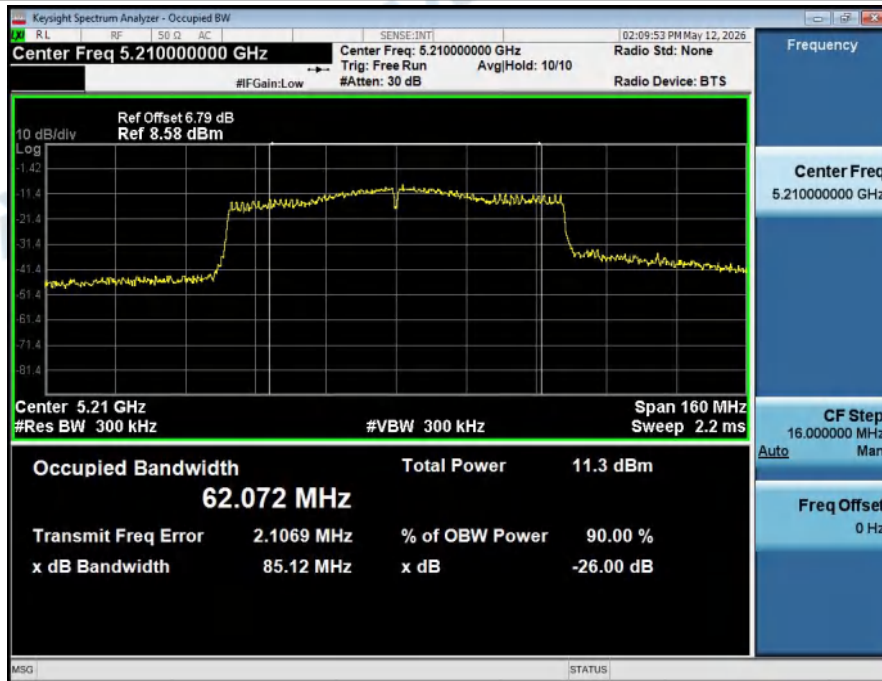


3. Burst Length

Condition	Antenna	Mode	Frequency	Burst_Length(ms)	Limit(ms)	Result
NVNT	ANT1	802.11a	5180.00	0.170	8	Pass
NVNT	ANT1	802.11a	5200.00	1.400	8	Pass
NVNT	ANT1	802.11a	5240.00	1.400	8	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	1.310	8	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	1.310	8	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	1.310	8	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	1.320	8	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	1.320	8	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	1.320	8	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	0.640	8	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	0.650	8	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	0.660	8	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	0.660	8	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	0.050	8	Pass


Burst_Length_NVNT_ANT1_802_11a_5180

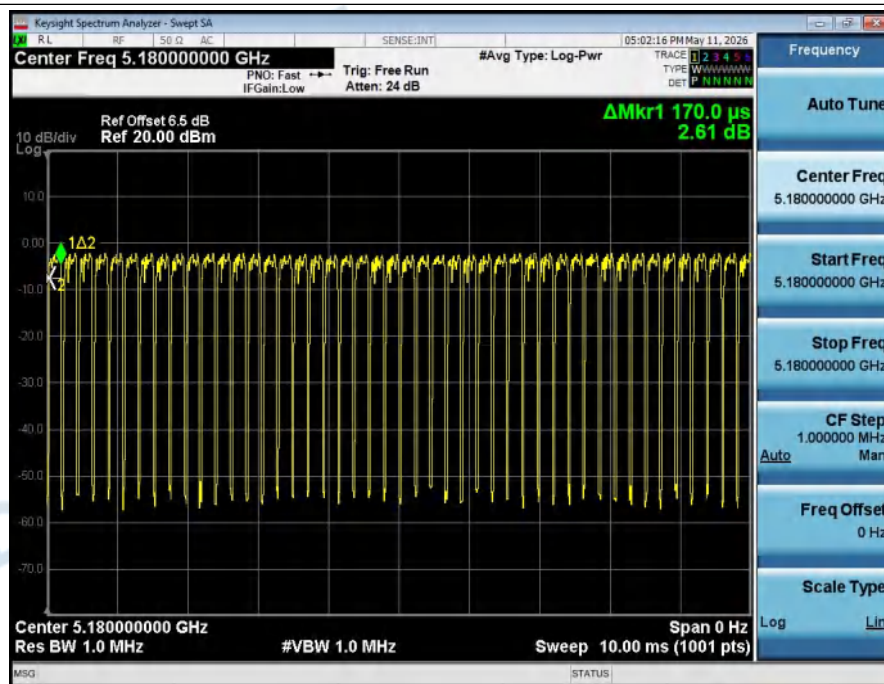


Burst_Length_NVNT_ANT1_802_11a_5200

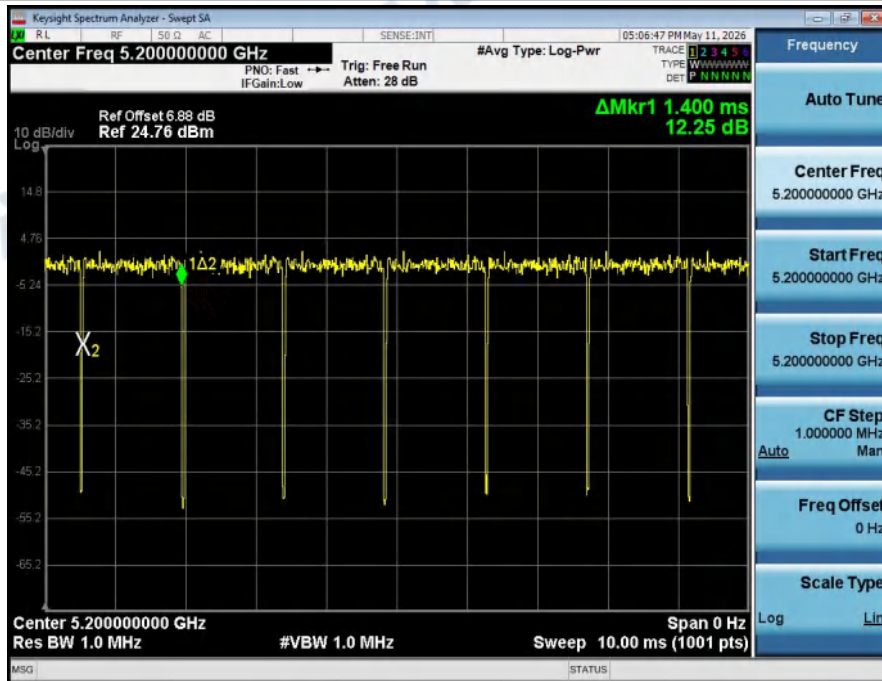


Burst_Length_NVNT_ANT1_802_11a_5240

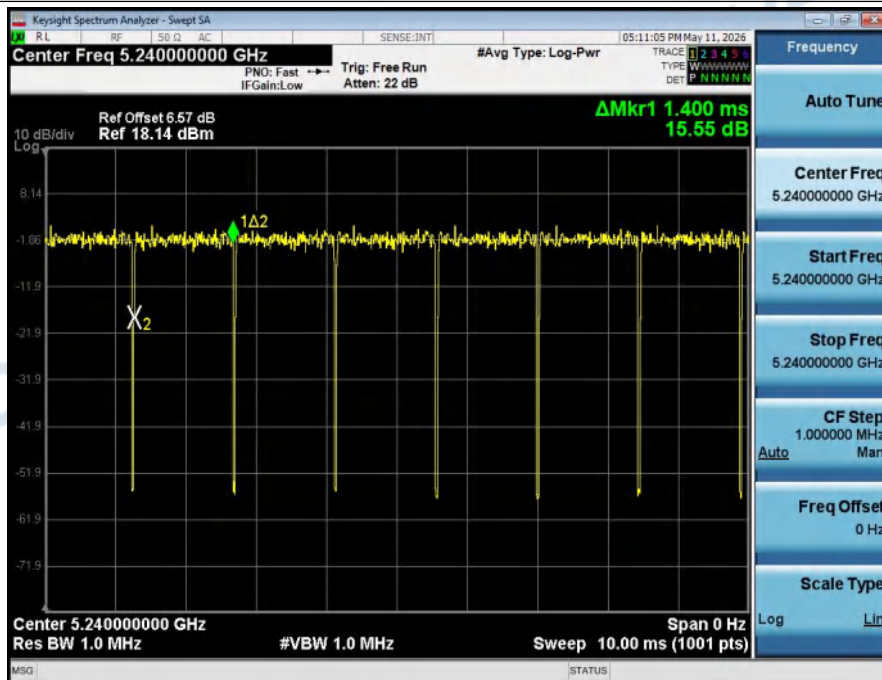


Burst_Length_NVNT_ANT1_802_11n(HT20)_5180

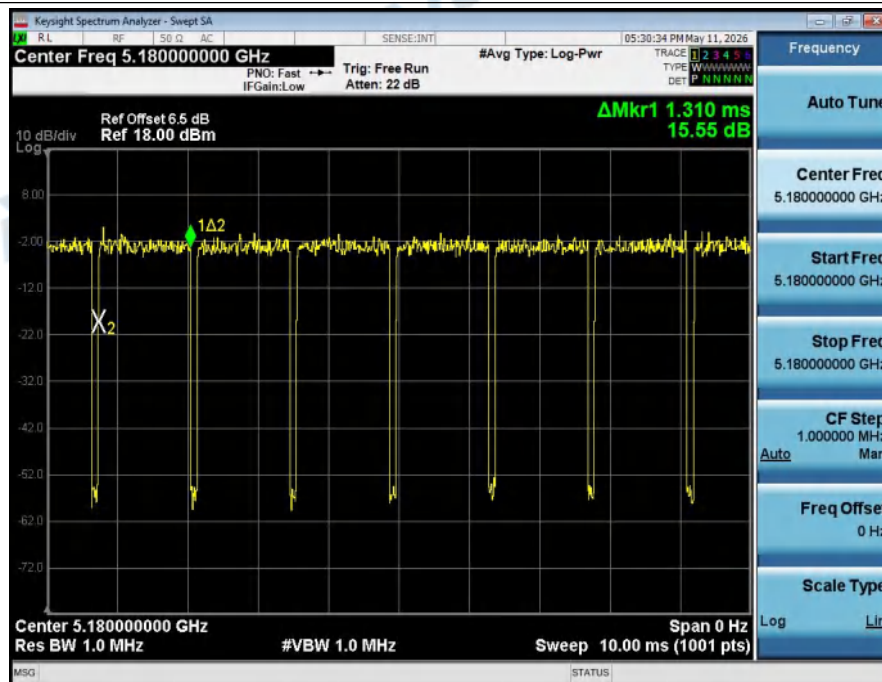


Burst_Length_NVNT_ANT1_802_11n(HT20)_5200

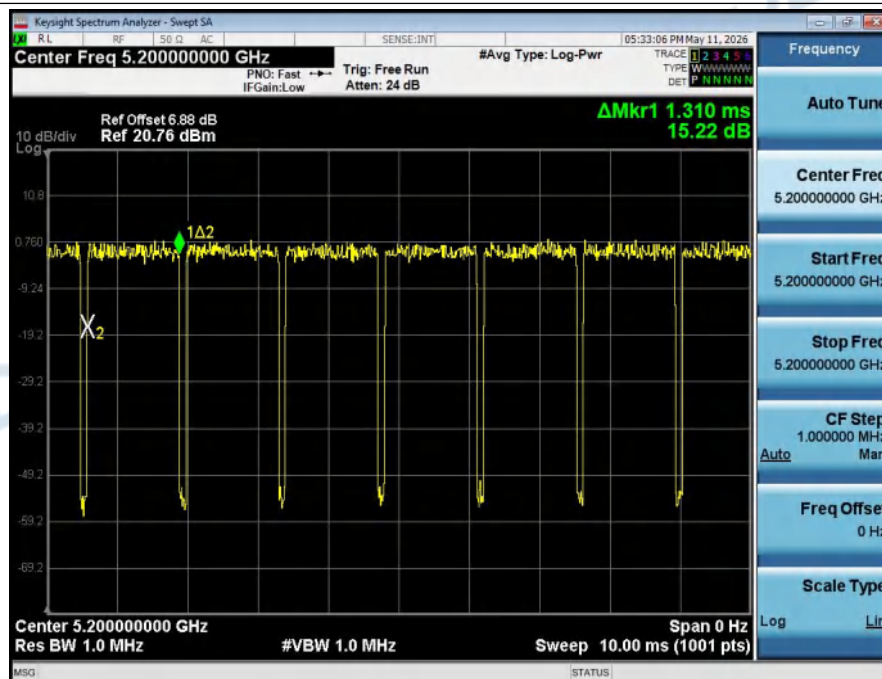


Burst_Length_NVNT_ANT1_802_11n(HT20)_5240

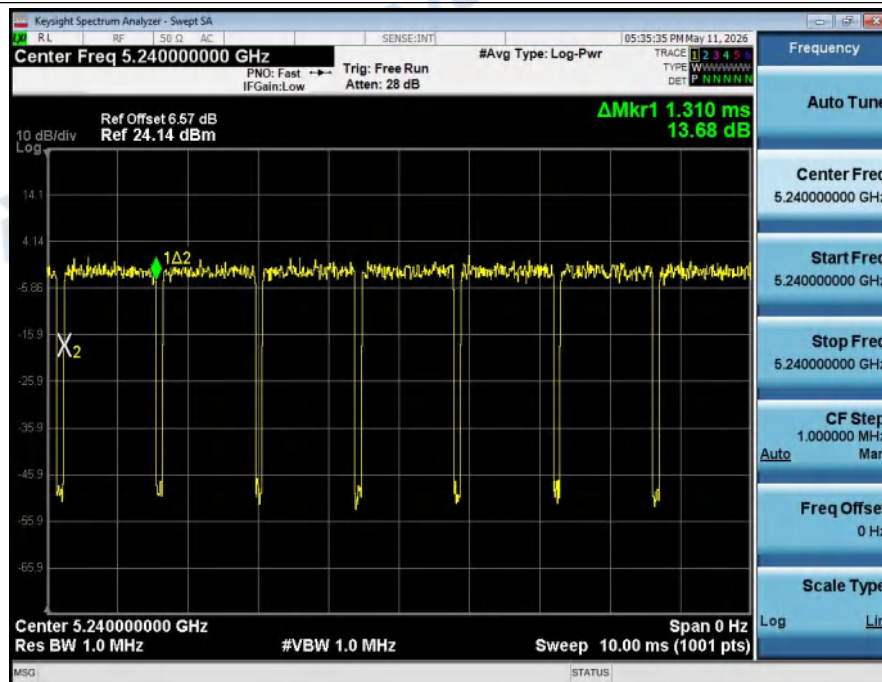


Burst_Length_NVNT_ANT1_802_11ac(VHT20)_5180

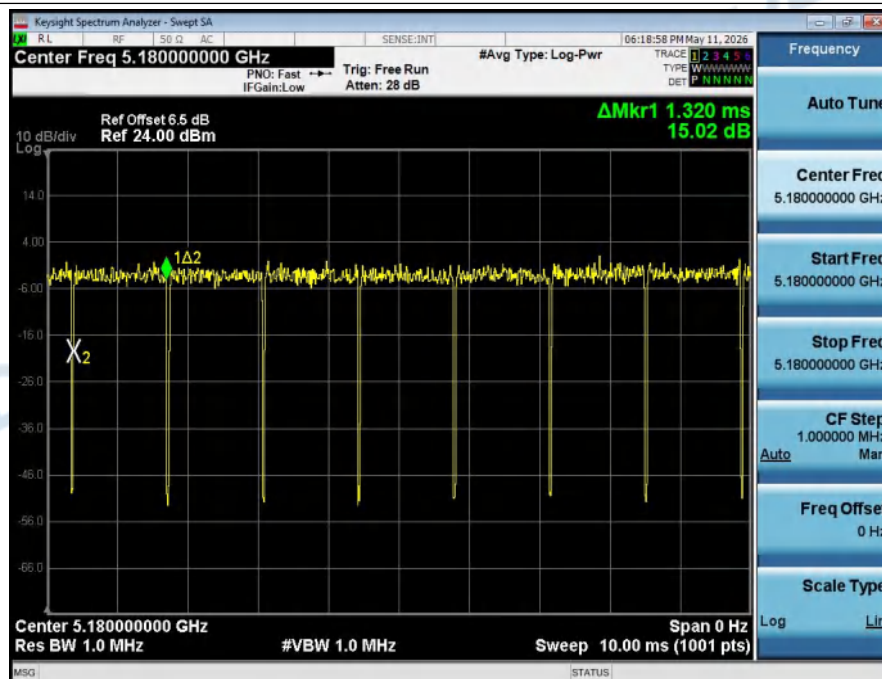


Burst_Length_NVNT_ANT1_802_11ac(VHT20)_5200

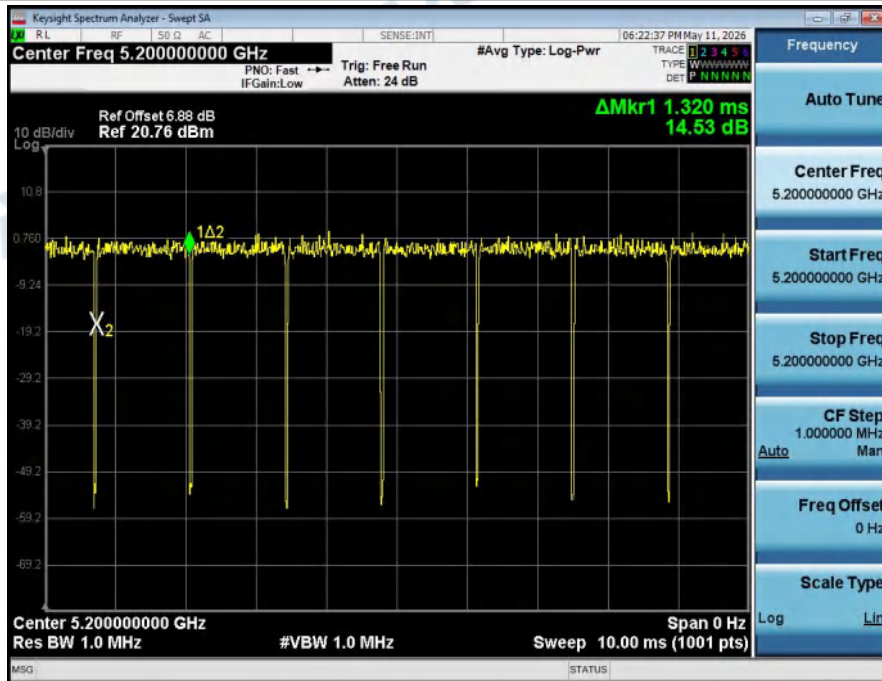


Burst_Length_NVNT_ANT1_802_11ac(VHT20)_5240

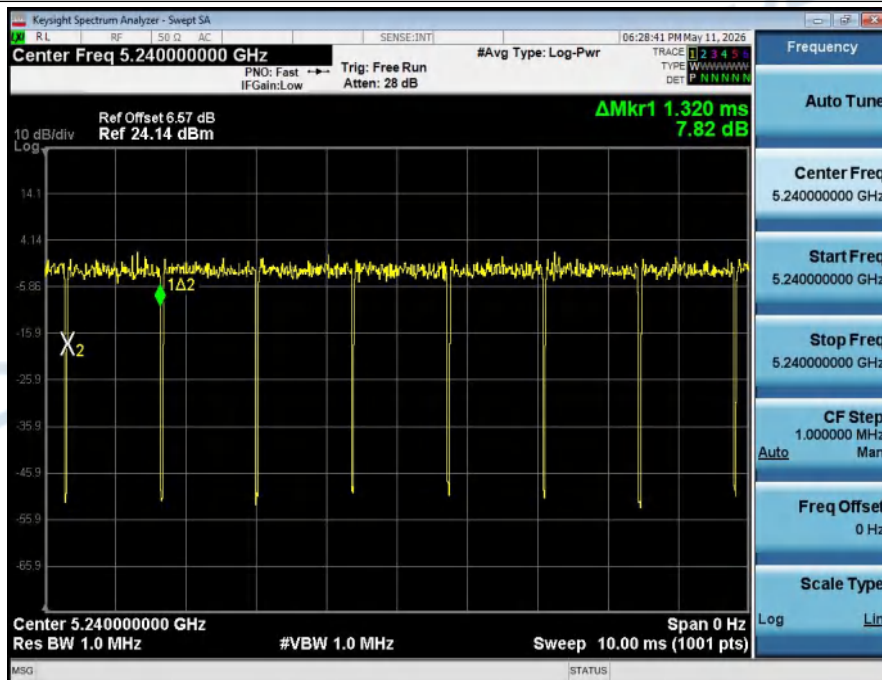


Burst_Length_NVNT_ANT1_802_11n(HT40)_5190

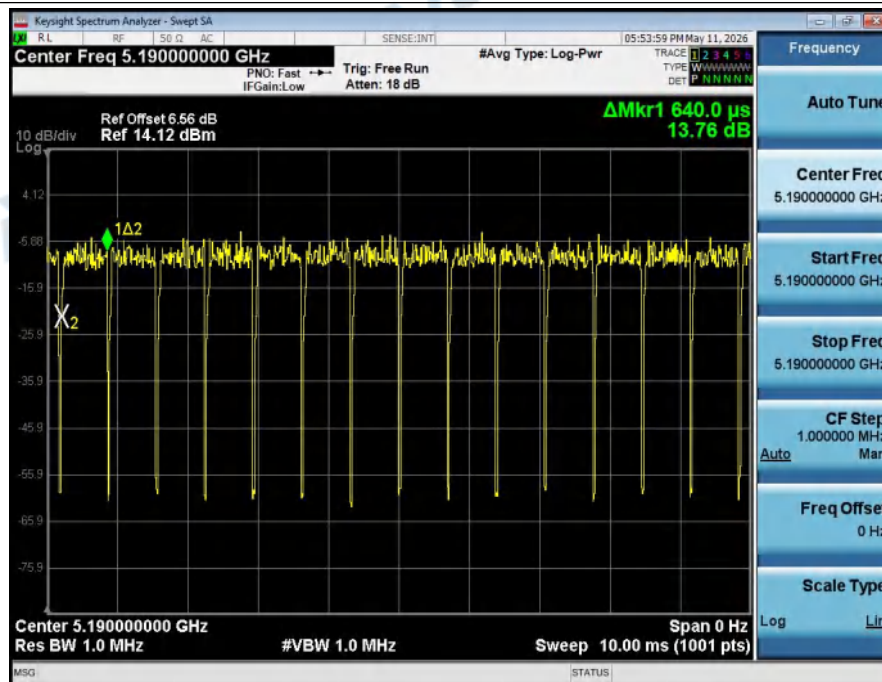


Burst_Length_NVNT_ANT1_802_11n(HT40)_5230

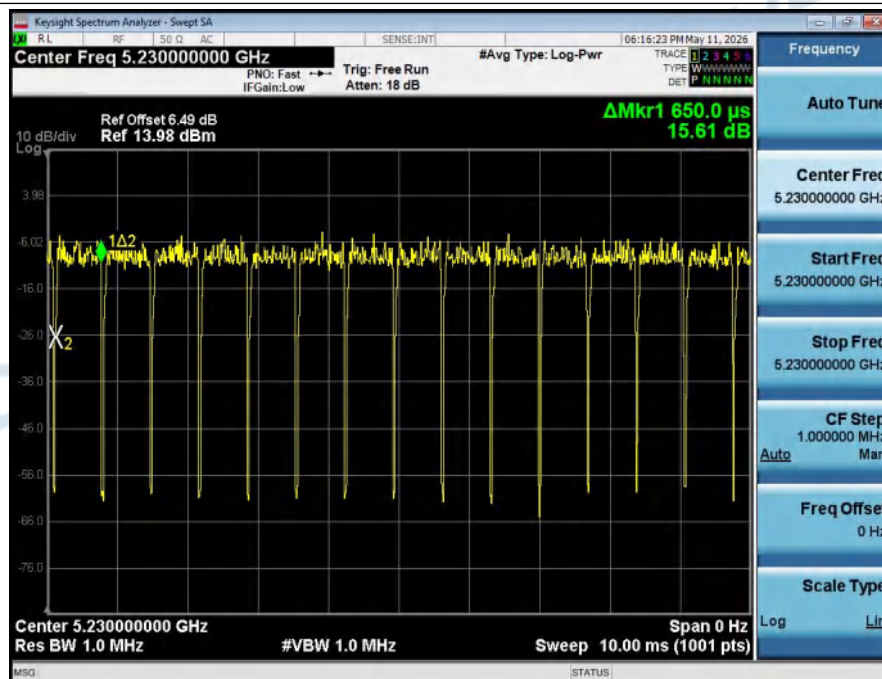


Burst_Length_NVNT_ANT1_802_11ac(VHT40)_5190

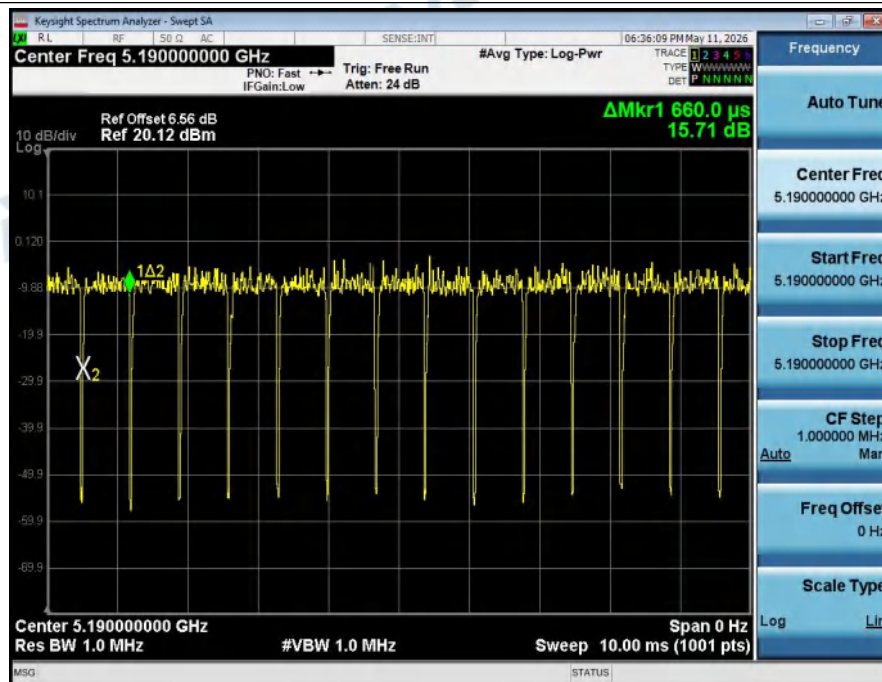

Burst_Length_NVNT_ANT1_802_11ac(VHT40)_5230

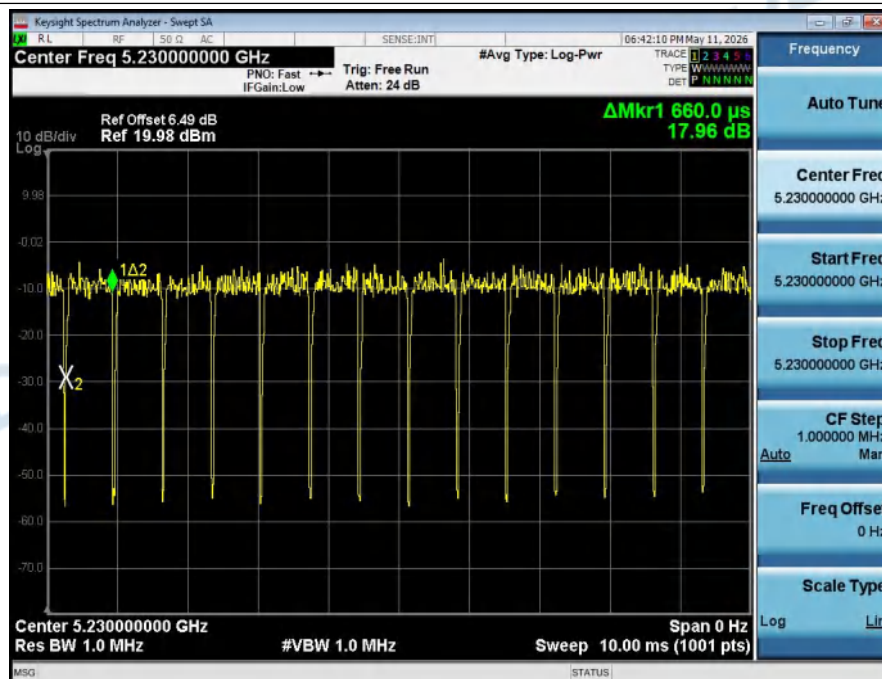

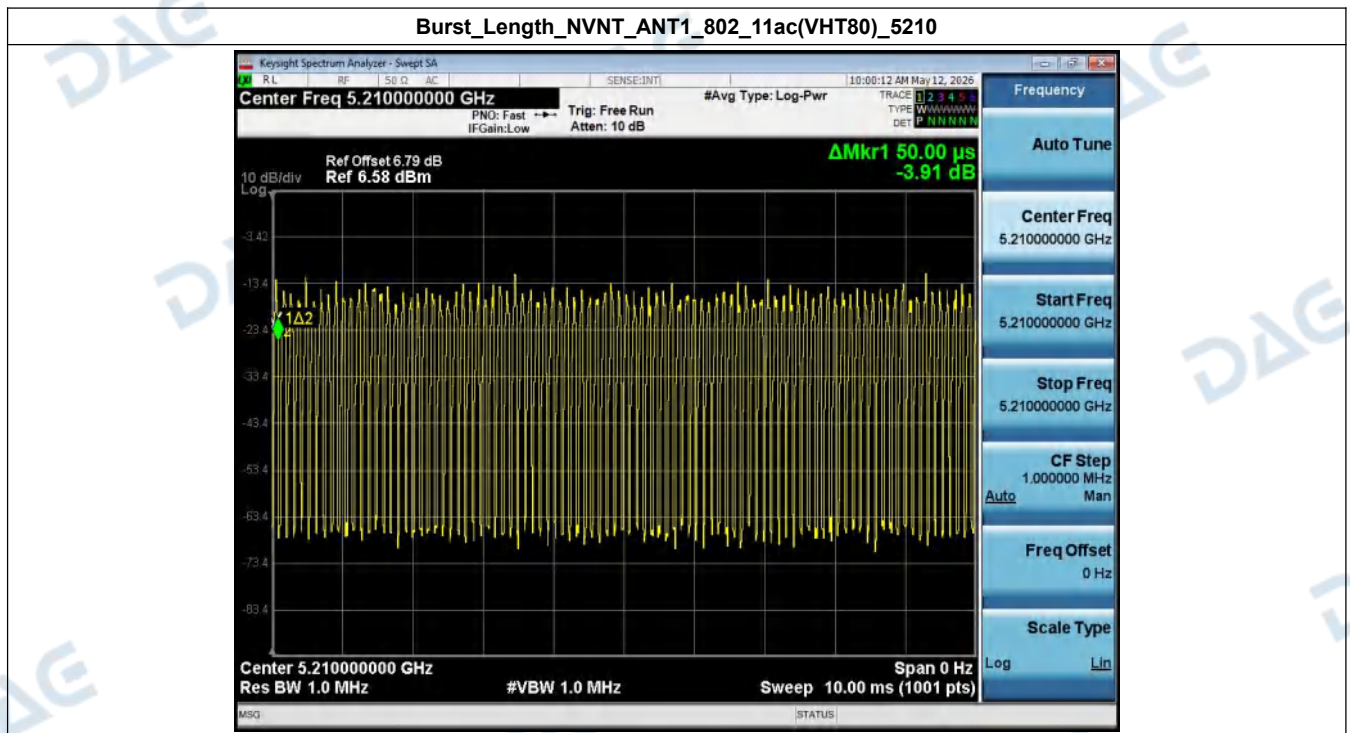

4. RF output power & E.I.R.P(Without TPC)

Condition	Antenna	Mode	Frequency	Measured Power (dBm)	Antenna Power (mW/MHz)	Rated Power (mW/MHz)	Power Limit (mW/MHz)	Power Tolerance(%)	Tolerance Limit(%)	Result
NVNT	ANT1	802.11a	5180.00	-9.70	0.11	0.2	10.00	-45	-80~+20	Pass
NVNT	ANT1	802.11a	5200.00	-9.95	0.10	0.2	10.00	-50	-80~+20	Pass
NVNT	ANT1	802.11a	5240.00	-9.48	0.11	0.2	10.00	-45	-80~+20	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	-8.27	0.15	0.2	10.00	-25	-80~+20	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	-9.65	0.11	0.2	10.00	-45	-80~+20	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	-8.29	0.15	0.2	10.00	-25	-80~+20	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	-9.77	0.11	0.2	10.00	-45	-80~+20	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	-7.19	0.19	0.2	10.00	-5	-80~+20	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	-7.96	0.16	0.2	10.00	-20	-80~+20	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	-11.46	0.07	0.1	5.00	-30	-80~+20	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	-11.35	0.07	0.1	5.00	-30	-80~+20	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	-11.39	0.07	0.1	5.00	-30	-80~+20	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	-11.25	0.07	0.1	5.00	-30	-80~+20	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	-12.51	0.06	0.1	2.50	-40	-80~+20	Pass

Condition	Antenna	Mode	Frequency	Measured Power(dBm/MHz)	Antenna Gain(dBi)	EIRP(mW/MHz)	EIRP Limit(mW/MHz)	Result
NVNT	ANT1	802.11a	5180.00	-9.70	2.05	-7.65	10.00	Pass
NVNT	ANT1	802.11a	5200.00	-9.95	2.05	-7.9	10.00	Pass
NVNT	ANT1	802.11a	5240.00	-9.48	2.05	-7.43	10.00	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	-8.27	2.05	-6.22	10.00	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	-9.65	2.05	-7.6	10.00	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	-8.29	2.05	-6.24	10.00	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	-9.77	2.05	-7.72	10.00	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	-7.19	2.05	-5.14	10.00	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	-7.96	2.05	-5.91	10.00	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	-11.46	2.05	-9.41	5.00	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	-11.35	2.05	-9.3	5.00	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	-11.39	2.05	-9.34	5.00	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	-11.25	2.05	-9.2	5.00	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	-12.51	2.05	-10.46	2.50	Pass

5. Spurious Emissions

Condition	Mode	TX Freq. (MHz)	Freq Range (MHz)	Spur. Freq. (MHz)	Amplitude (dBm/MHz)	Gain (dBi)	EIRP (dBm/MHz)	Limit (dBm/MHz)	Spur. Level	Limit	Result
NVNT	802.11a	5180	5140.0~5142.0	5141.395	-45.04	2.05	-42.99	-26	0.0313μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5180	5142.0~5150.0	5148.595	-42.49	2.05	-40.44	-18	0.0564μW/MHz	15μW/MHz	Pass
NVNT	802.11a	5180	5250.0~5250.2	5250.115	-49.02	2.05	-46.97	0.27	0.000013mW/MHz	1.063327mW/MHz	Pass
NVNT	802.11a	5180	5250.2~5251.0	5250.993	-49.58	2.05	-47.53	-9.93	0.000011mW/MHz	0.101742mW/MHz	Pass
NVNT	802.11a	5180	5251.0~5260.0	5252.658	-47.35	2.05	-45.3	-11.47	0.000018mW/MHz	0.071231mW/MHz	Pass
NVNT	802.11a	5180	5260.0~5266.7	5260.24	-48.98	2.05	-46.93	-18.29	0.000013mW/MHz	0.014832mW/MHz	Pass
NVNT	802.11a	5180	5266.7~5365.0	5361.94	-47.71	2.05	-45.66	-26	0.0169μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5180	30.0~5140.0	2461.683	-35.98	2.05	-33.93	-26	0.2521μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5180	5365.0~10000.0	5828.552	-45.47	2.05	-43.42	-26	0.0284μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5180	10000.0~26000.0	25011.2	-46.42	2.05	-44.37	-26	0.0227μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5200	5140.0~5142.0	5140.405	-48.35	2.05	-46.3	-26	0.0146μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5200	5142.0~5150.0	5147.898	-46.8	2.05	-44.75	-18	0.0208μW/MHz	15μW/MHz	Pass
NVNT	802.11a	5200	5250.0~5250.2	5250.047	-44.57	2.05	-42.52	2.07	0.000035mW/MHz	1.609410mW/MHz	Pass
NVNT	802.11a	5200	5250.2~5251.0	5250.295	-45.91	2.05	-43.86	-2.95	0.000026mW/MHz	0.506991mW/MHz	Pass
NVNT	802.11a	5200	5251.0~5260.0	5255.65	-46.38	2.05	-44.33	-14.13	0.000023mW/MHz	0.038607mW/MHz	Pass
NVNT	802.11a	5200	5260.0~5266.7	5266.495	-46.23	2.05	-44.18	-25.79	0.000024mW/MHz	0.002634mW/MHz	Pass
NVNT	802.11a	5200	5266.7~5365.0	5331.295	-46.33	2.05	-44.28	-26	0.0232μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5200	30.0~5140.0	2466.668	-39.91	2.05	-37.86	-26	0.1021μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5200	5365.0~10000.0	5441.716	-44.79	2.05	-42.74	-26	0.0331μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5200	10000.0~26000.0	25046.4	-46.08	2.05	-44.03	-26	0.0246μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5240	5140.0~5142.0	5140.99	-47.66	2.05	-45.61	-26	0.0171μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5240	5142.0~5150.0	5145.715	-49.33	2.05	-47.28	-18	0.0116μW/MHz	15μW/MHz	Pass
NVNT	802.11a	5240	5250.0~5250.2	5250.025	-14.8	2.05	-12.75	2.67	0.033088mW/MHz	1.847850mW/MHz	Pass
NVNT	802.11a	5240	5250.2~5251.0	5250.295	-16.04	2.05	-13.99	-2.95	0.024905mW/MHz	0.506991mW/MHz	Pass
NVNT	802.11a	5240	5251.0~5260.0	5251.307	-21.29	2.05	-19.24	-10.27	0.007422mW/MHz	0.093900mW/MHz	Pass


NVNT	802.11a	524 0	5260.0~526 6.7	5260. 78	-28.49	2.0 5	-26.44	-18.94	0.001417mW /MHz	0.012776mW /MHz	Pass
NVNT	802.11a	524 0	5266.7~536 5.0	5267. 89	-34.59	2.0 5	-32.54	-26	0.3472μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11a	524 0	30.0~5140.0	3676. 029	-44.8	2.0 5	-42.75	-26	0.0330μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11a	524 0	5365.0~100 00.0	6940. 207	-45.58	2.0 5	-43.53	-26	0.0277μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11a	524 0	10000.0~26 000.0	25020 .8	-46.84	2.0 5	-44.79	-26	0.0207μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11n(HT 20)	518 0	5140.0~514 2.0	5141. 53	-42.39	2.0 5	-40.34	-26	0.0576μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11n(HT 20)	518 0	5142.0~515 0.0	5149. 945	-40.17	2.0 5	-38.12	-18	0.0962μW/M Hz	15μW/MHz	Pass
NVNT	802.11n(HT 20)	518 0	5250.0~525 0.2	5250. 07	-49.59	2.0 5	-47.54	1.47	0.000011mW /MHz	1.401737mW /MHz	Pass
NVNT	802.11n(HT 20)	518 0	5250.2~525 1.0	5250. 542	-48.97	2.0 5	-46.92	-5.42	0.000013mW /MHz	0.286748mW /MHz	Pass
NVNT	802.11n(HT 20)	518 0	5251.0~526 0.0	5253. 873	-48.36	2.0 5	-46.31	-12.55	0.000015mW /MHz	0.055548mW /MHz	Pass
NVNT	802.11n(HT 20)	518 0	5260.0~526 6.7	5262. 377	-48.49	2.0 5	-46.44	-20.85	0.000014mW /MHz	0.008217mW /MHz	Pass
NVNT	802.11n(HT 20)	518 0	5266.7~536 5.0	5318. 717	-47.15	2.0 5	-45.1	-26	0.0192μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11n(HT 20)	518 0	30.0~5140.0	5137. 631	-44.68	2.0 5	-42.63	-26	0.0340μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11n(HT 20)	518 0	5365.0~100 00.0	6305. 118	-45.38	2.0 5	-43.33	-26	0.0289μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11n(HT 20)	518 0	10000.0~26 000.0	25028 .8	-46.66	2.0 5	-44.61	-26	0.0215μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11n(HT 20)	520 0	5140.0~514 2.0	5140. 495	-47.93	2.0 5	-45.88	-26	0.0160μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11n(HT 20)	520 0	5142.0~515 0.0	5148. 37	-46.16	2.0 5	-44.11	-18	0.0241μW/M Hz	15μW/MHz	Pass
NVNT	802.11n(HT 20)	520 0	5250.0~525 0.2	5250. 025	-45.49	2.0 5	-43.44	2.67	0.000028mW /MHz	1.847850mW /MHz	Pass
NVNT	802.11n(HT 20)	520 0	5250.2~525 1.0	5250. 97	-46.37	2.0 5	-44.32	-9.7	0.000023mW /MHz	0.107152mW /MHz	Pass
NVNT	802.11n(HT 20)	520 0	5251.0~526 0.0	5251. 195	-44.7	2.0 5	-42.65	-10.17	0.000034mW /MHz	0.096087mW /MHz	Pass
NVNT	802.11n(HT 20)	520 0	5260.0~526 6.7	5262. 602	-46.88	2.0 5	-44.83	-21.12	0.000021mW /MHz	0.007721mW /MHz	Pass
NVNT	802.11n(HT 20)	520 0	5266.7~536 5.0	5302. 855	-46.83	2.0 5	-44.78	-26	0.0207μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11n(HT 20)	520 0	30.0~5140.0	3416. 809	-45.29	2.0 5	-43.24	-26	0.0295μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11n(HT 20)	520 0	5365.0~100 00.0	7068. 82	-45.47	2.0 5	-43.42	-26	0.0283μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11n(HT 20)	520 0	10000.0~26 000.0	25115 .2	-45.67	2.0 5	-43.62	-26	0.0270μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11n(HT 20)	524 0	5140.0~514 2.0	5141. 688	-49.55	2.0 5	-47.5	-26	0.0111μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11n(HT 20)	524 0	5142.0~515 0.0	5143. 42	-48.81	2.0 5	-46.76	-18	0.0131μW/M Hz	15μW/MHz	Pass
NVNT	802.11n(HT 20)	524 0	5250.0~525 0.2	5250. 047	-13.14	2.0 5	-11.09	2.07	0.048572mW /MHz	1.609410mW /MHz	Pass

NVNT	802.11n(HT 20)	524 0	5250.2~525 1.0	5250. 408	-15.67	2.0 5	-13.62	-4.08	0.027118mW /MHz	0.391291mW /MHz	Pass
NVNT	802.11n(HT 20)	524 0	5251.0~526 0.0	5251. 127	-18.09	2.0 5	-16.04	-10.11	0.015513mW /MHz	0.097424mW /MHz	Pass
NVNT	802.11n(HT 20)	524 0	5260.0~526 6.7	5263. 458	-29.7	2.0 5	-27.65	-22.15	0.001071mW /MHz	0.006097mW /MHz	Pass
NVNT	802.11n(HT 20)	524 0	5266.7~536 5.0	5269. 33	-32.62	2.0 5	-30.57	-26	0.5468μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11n(HT 20)	524 0	30.0~5140.0	3639. 14	-45.5	2.0 5	-43.45	-26	0.0281μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11n(HT 20)	524 0	5365.0~100 00.0	5852. 48	-45.75	2.0 5	-43.7	-26	0.0266μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11n(HT 20)	524 0	10000.0~26 000.0	25088	-46.5	2.0 5	-44.45	-26	0.0223μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT20)	518 0	5140.0~514 2.0	5140. 068	-44.59	2.0 5	-42.54	-26	0.0347μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT20)	518 0	5142.0~515 0.0	5146. 547	-39.78	2.0 5	-37.73	-18	0.1051μW/M Hz	15μW/MHz	Pass
NVNT	802.11ac(V HT20)	518 0	5250.0~525 0.2	5250. 002	-50.54	2.0 5	-48.49	3.27	0.000009mW /MHz	2.121615mW /MHz	Pass
NVNT	802.11ac(V HT20)	518 0	5250.2~525 1.0	5250. 542	-49.53	2.0 5	-47.48	-5.42	0.000011mW /MHz	0.286748mW /MHz	Pass
NVNT	802.11ac(V HT20)	518 0	5251.0~526 0.0	5255. 852	-47.93	2.0 5	-45.88	-14.31	0.000016mW /MHz	0.037040mW /MHz	Pass
NVNT	802.11ac(V HT20)	518 0	5260.0~526 6.7	5260. 983	-48.64	2.0 5	-46.59	-19.18	0.000014mW /MHz	0.012081mW /MHz	Pass
NVNT	802.11ac(V HT20)	518 0	5266.7~536 5.0	5363. 74	-47.19	2.0 5	-45.14	-26	0.0190μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT20)	518 0	30.0~5140.0	3641. 134	-44.68	2.0 5	-42.63	-26	0.0340μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT20)	518 0	5365.0~100 00.0	6310. 103	-45.3	2.0 5	-43.25	-26	0.0295μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT20)	518 0	10000.0~26 000.0	25094 .4	-47.01	2.0 5	-44.96	-26	0.0198μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT20)	520 0	5140.0~514 2.0	5140. 585	-48.04	2.0 5	-45.99	-26	0.0157μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT20)	520 0	5142.0~515 0.0	5149. 945	-46.18	2.0 5	-44.13	-18	0.0240μW/M Hz	15μW/MHz	Pass
NVNT	802.11ac(V HT20)	520 0	5250.0~525 0.2	5250. 002	-47.11	2.0 5	-45.06	3.27	0.000019mW /MHz	2.121615mW /MHz	Pass
NVNT	802.11ac(V HT20)	520 0	5250.2~525 1.0	5250. 273	-46.27	2.0 5	-44.22	-2.73	0.000024mW /MHz	0.533949mW /MHz	Pass
NVNT	802.11ac(V HT20)	520 0	5251.0~526 0.0	5251. 038	-45.61	2.0 5	-43.56	-10.03	0.000027mW /MHz	0.099235mW /MHz	Pass
NVNT	802.11ac(V HT20)	520 0	5260.0~526 6.7	5265. 865	-46.57	2.0 5	-44.52	-25.04	0.000022mW /MHz	0.003135mW /MHz	Pass
NVNT	802.11ac(V HT20)	520 0	5266.7~536 5.0	5343. 828	-47.57	2.0 5	-45.52	-26	0.0174μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT20)	520 0	30.0~5140.0	3651. 104	-44.04	2.0 5	-41.99	-26	0.0394μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT20)	520 0	5365.0~100 00.0	5758. 762	-45	2.0 5	-42.95	-26	0.0316μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT20)	520 0	10000.0~26 000.0	24947 .2	-46.58	2.0 5	-44.53	-26	0.0220μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT20)	524 0	5140.0~514 2.0	5140. 36	-49.65	2.0 5	-47.6	-26	0.0108μW/M Hz	2.5μW/MHz	Pass


NVNT	802.11ac(V HT20)	524 0	5142.0~515 0.0	5146. 525	-49.19	2.0 5	-47.14	-18	0.0120μW/M Hz	15μW/MHz	Pass
NVNT	802.11ac(V HT20)	524 0	5250.0~525 0.2	5250. 16	-13.88	2.0 5	-11.83	-0.93	0.040882mW /MHz	0.806616mW /MHz	Pass
NVNT	802.11ac(V HT20)	524 0	5250.2~525 1.0	5250. 205	-15.34	2.0 5	-13.29	-2.05	0.029227mW /MHz	0.623735mW /MHz	Pass
NVNT	802.11ac(V HT20)	524 0	5251.0~526 0.0	5251. 488	-20.11	2.0 5	-18.06	-10.43	0.009756mW /MHz	0.090504mW /MHz	Pass
NVNT	802.11ac(V HT20)	524 0	5260.0~526 6.7	5260. 69	-26.91	2.0 5	-24.86	-18.83	0.002038mW /MHz	0.013098mW /MHz	Pass
NVNT	802.11ac(V HT20)	524 0	5266.7~536 5.0	5266. 967	-32.14	2.0 5	-30.09	-26	0.6111μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT20)	524 0	30.0~5140.0	2448. 722	-39.03	2.0 5	-36.98	-26	0.1251μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT20)	524 0	5365.0~100 00.0	5777. 705	-45.28	2.0 5	-43.23	-26	0.0296μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT20)	524 0	10000.0~26 000.0	25044 .8	-46.15	2.0 5	-44.1	-26	0.0242μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11n(HT 40)	519 0	5100.0~514 1.6	5135. 31	-43.52	2.0 5	-41.47	-26	0.0445μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11n(HT 40)	519 0	5141.6~515 0.0	5147. 52	-39.25	2.0 5	-37.2	-18	0.1189μW/M Hz	15μW/MHz	Pass
NVNT	802.11n(HT 40)	519 0	5250.0~525 1.0	5250. 24	-42.24	2.0 5	-40.19	-5.41	0.000060mW /MHz	0.287720mW /MHz	Pass
NVNT	802.11n(HT 40)	519 0	5251.0~527 0.0	5254. 68	-41.71	2.0 5	-39.66	-14.56	0.000067mW /MHz	0.034996mW /MHz	Pass
NVNT	802.11n(HT 40)	519 0	5270.0~527 8.4	5270. 64	-45.67	2.0 5	-43.62	-21.39	0.000027mW /MHz	0.007254mW /MHz	Pass
NVNT	802.11n(HT 40)	519 0	5278.4~540 0.0	5278. 71	-46.7	2.0 5	-44.65	-26	0.0213μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11n(HT 40)	519 0	30.0~5100.0	2470. 656	-43.09	2.0 5	-41.04	-26	0.0491μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11n(HT 40)	519 0	5400.0~100 00.0	5731. 843	-45.54	2.0 5	-43.49	-26	0.0279μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11n(HT 40)	519 0	10000.0~26 000.0	25051 .2	-45.9	2.0 5	-43.85	-26	0.0257μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11n(HT 40)	523 0	5100.0~514 1.6	5137. 71	-48.5	2.0 5	-46.45	-26	0.0141μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11n(HT 40)	523 0	5141.6~515 0.0	5146. 86	-47.46	2.0 5	-45.41	-18	0.0179μW/M Hz	15μW/MHz	Pass
NVNT	802.11n(HT 40)	523 0	5250.0~525 1.0	5250. 36	-23.02	2.0 5	-20.97	-6.61	0.004991mW /MHz	0.218258mW /MHz	Pass
NVNT	802.11n(HT 40)	523 0	5251.0~527 0.0	5251. 98	-24.29	2.0 5	-22.24	-13.42	0.003725mW /MHz	0.045468mW /MHz	Pass
NVNT	802.11n(HT 40)	523 0	5270.0~527 8.4	5271. 9	-31.84	2.0 5	-29.79	-22.15	0.000654mW /MHz	0.006095mW /MHz	Pass
NVNT	802.11n(HT 40)	523 0	5278.4~540 0.0	5279. 94	-36.33	2.0 5	-34.28	-26	0.2326μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11n(HT 40)	523 0	30.0~5100.0	2631. 173	-45.54	2.0 5	-43.49	-26	0.0279μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11n(HT 40)	523 0	5400.0~100 00.0	6489. 563	-44.84	2.0 5	-42.79	-26	0.0328μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11n(HT 40)	523 0	10000.0~26 000.0	24977 .6	-47.05	2.0 5	-45	-26	0.0197μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT40)	519 0	5100.0~514 1.6	5140. 38	-39.81	2.0 5	-37.76	-26	0.1045μW/M Hz	2.5μW/MHz	Pass

NVNT	802.11ac(V HT40)	519 0	5141.6~515 0.0	5149. 56	-37.85	2.0 5	-35.8	-18	0.1641μW/M Hz	15μW/MHz	Pass
NVNT	802.11ac(V HT40)	519 0	5250.0~525 1.0	5250. 72	-39.04	2.0 5	-36.99	-10.21	0.000125mW /MHz	0.095273mW /MHz	Pass
NVNT	802.11ac(V HT40)	519 0	5251.0~527 0.0	5255. 19	-39.29	2.0 5	-37.24	-14.77	0.000118mW /MHz	0.033308mW /MHz	Pass
NVNT	802.11ac(V HT40)	519 0	5270.0~527 8.4	5270. 52	-42.51	2.0 5	-40.46	-21.32	0.000056mW /MHz	0.007375mW /MHz	Pass
NVNT	802.11ac(V HT40)	519 0	5278.4~540 0.0	5283. 06	-44.33	2.0 5	-42.28	-26	0.0368μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT40)	519 0	30.0~5100.0	1755. 807	-40.46	2.0 5	-38.41	-26	0.0900μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT40)	519 0	5400.0~100 00.0	5941. 213	-44.91	2.0 5	-42.86	-26	0.0322μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT40)	519 0	10000.0~26 000.0	25110 .4	-47.24	2.0 5	-45.19	-26	0.0188μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT40)	523 0	5100.0~514 1.6	5137. 14	-46.91	2.0 5	-44.86	-26	0.0203μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT40)	523 0	5141.6~515 0.0	5142. 96	-47	2.0 5	-44.95	-18	0.0199μW/M Hz	15μW/MHz	Pass
NVNT	802.11ac(V HT40)	523 0	5250.0~525 1.0	5250. 6	-23.25	2.0 5	-21.2	-9.01	0.004726mW /MHz	0.125594mW /MHz	Pass
NVNT	802.11ac(V HT40)	523 0	5251.0~527 0.0	5254. 98	-23.7	2.0 5	-21.65	-14.69	0.004270mW /MHz	0.033993mW /MHz	Pass
NVNT	802.11ac(V HT40)	523 0	5270.0~527 8.4	5270. 76	-29.5	2.0 5	-27.45	-21.47	0.001122mW /MHz	0.007135mW /MHz	Pass
NVNT	802.11ac(V HT40)	523 0	5278.4~540 0.0	5284. 74	-35.32	2.0 5	-33.27	-26	0.2935μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT40)	523 0	30.0~5100.0	3498. 563	-30.62	2.0 5	-28.57	-26	0.8662μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT40)	523 0	5400.0~100 00.0	5779. 699	-44.97	2.0 5	-42.92	-26	0.0318μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT40)	523 0	10000.0~26 000.0	25075 .2	-46.64	2.0 5	-44.59	-26	0.0216μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT80)	521 0	5100.0~512 3.2	5102. 204	-47.72	2.0 5	-45.67	-26	0.0169μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT80)	521 0	5123.2~515 0.0	5149. 362	-47.43	2.0 5	-45.38	-18	0.0180μW/M Hz	15μW/MHz	Pass
NVNT	802.11ac(V HT80)	521 0	5250.0~525 1.0	5250. 138	-31.89	2.0 5	-29.84	-7.4	0.000647mW /MHz	0.181945mW /MHz	Pass
NVNT	802.11ac(V HT80)	521 0	5251.0~529 0.0	5251. 24	-37.52	2.0 5	-35.47	-16.07	0.000177mW /MHz	0.024718mW /MHz	Pass
NVNT	802.11ac(V HT80)	521 0	5290.0~529 6.7	5291. 52	-47.04	2.0 5	-44.99	-24.48	0.000020mW /MHz	0.003567mW /MHz	Pass
NVNT	802.11ac(V HT80)	521 0	5296.7~548 0.0	5389. 94	-46.42	2.0 5	-44.37	-26	0.0228μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT80)	521 0	30.0~5100.0	3693. 975	-45.13	2.0 5	-43.08	-26	0.0306μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT80)	521 0	5480.0~100 00.0	5884. 384	-45.57	2.0 5	-43.52	-26	0.0277μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(V HT80)	521 0	10000.0~26 000.0	24988 .8	-46.41	2.0 5	-44.36	-26	0.0228μW/M Hz	2.5μW/MHz	Pass


In_band_NVNT_ANT1_802_11a_5180

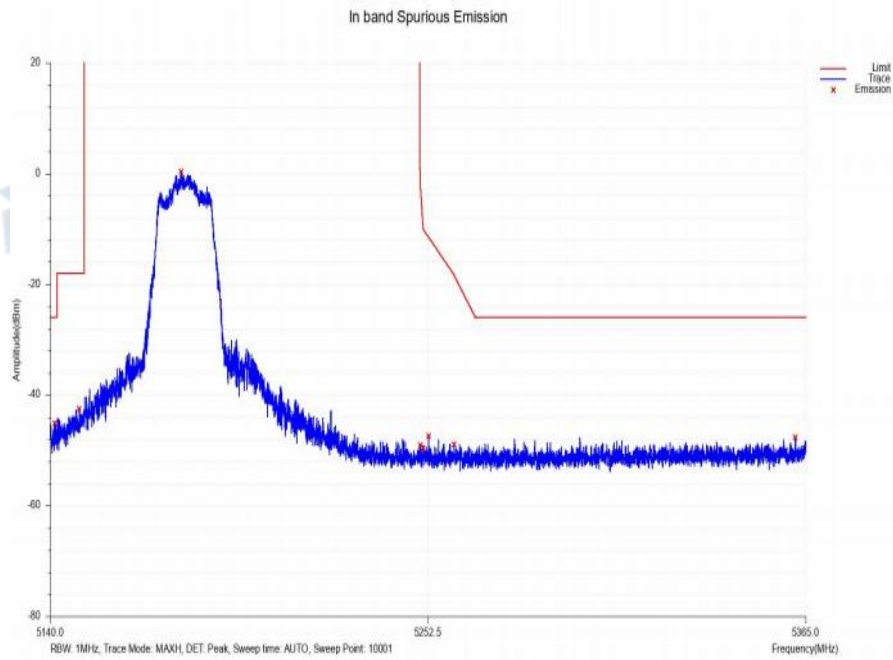


Out_of_band_NVNT_ANT1_802_11a_5180

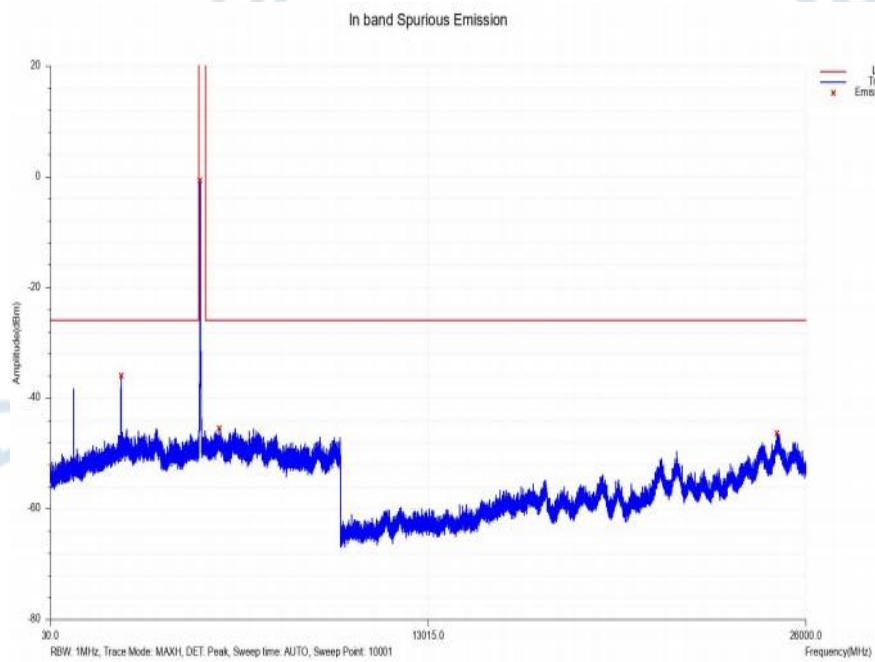


In_band_NVNT_ANT1_802_11a_5200

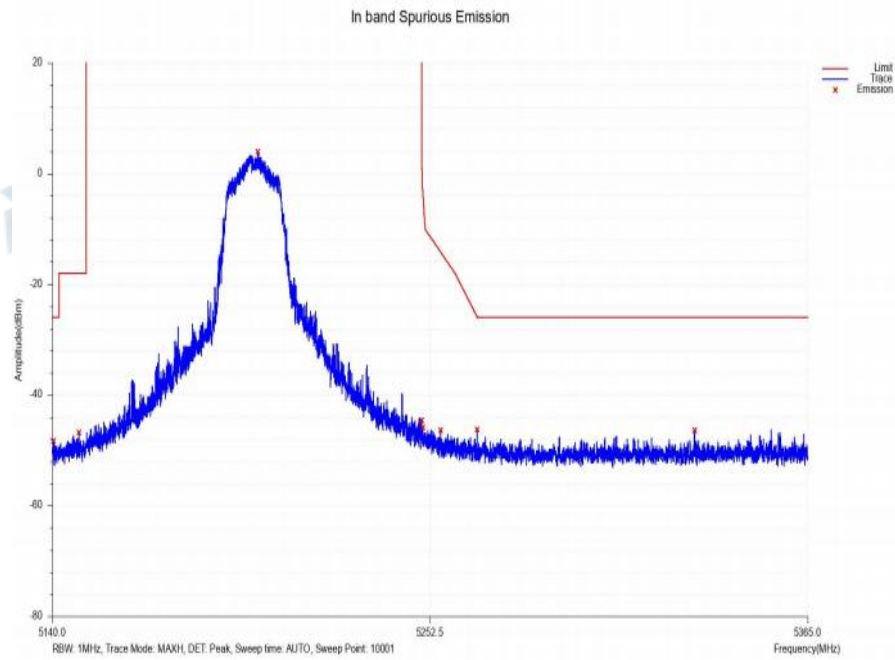


Out_of_band_NVNT_ANT1_802_11a_5200

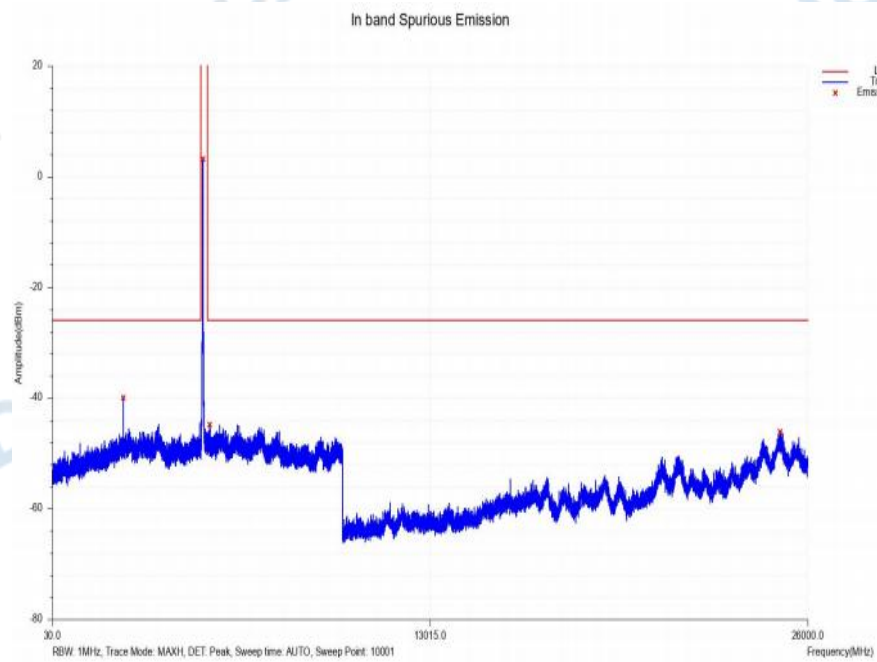


In_band_NVNT_ANT1_802_11a_5240

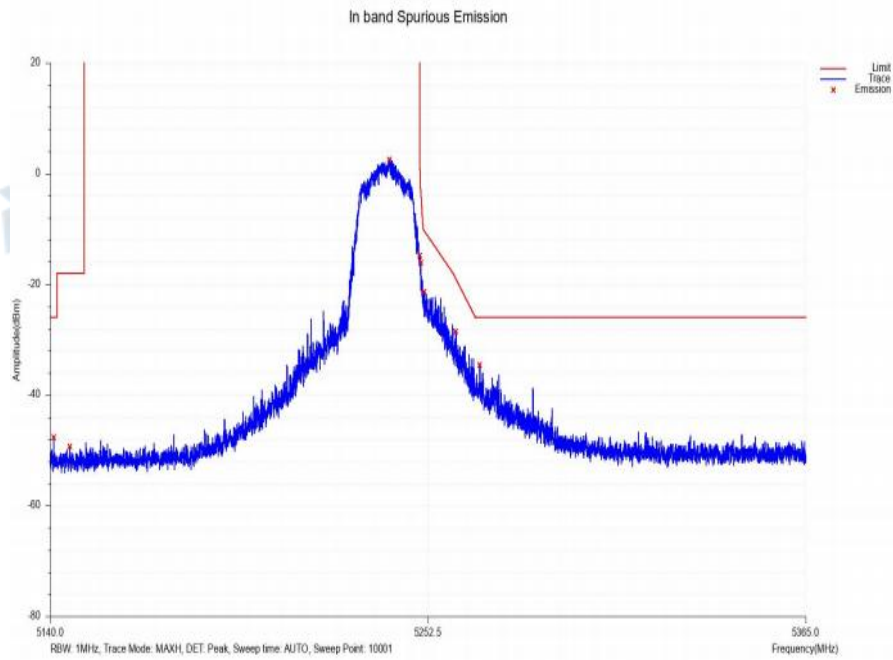


Out_of_band_NVNT_ANT1_802_11a_5240

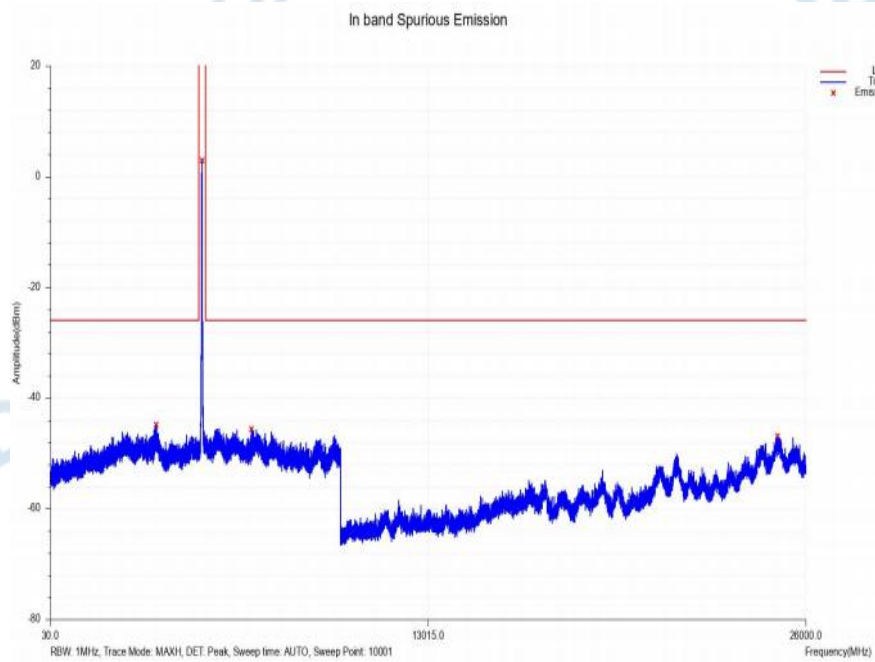


In_band_NVNT_ANT1_802_11n(HT20)_5180

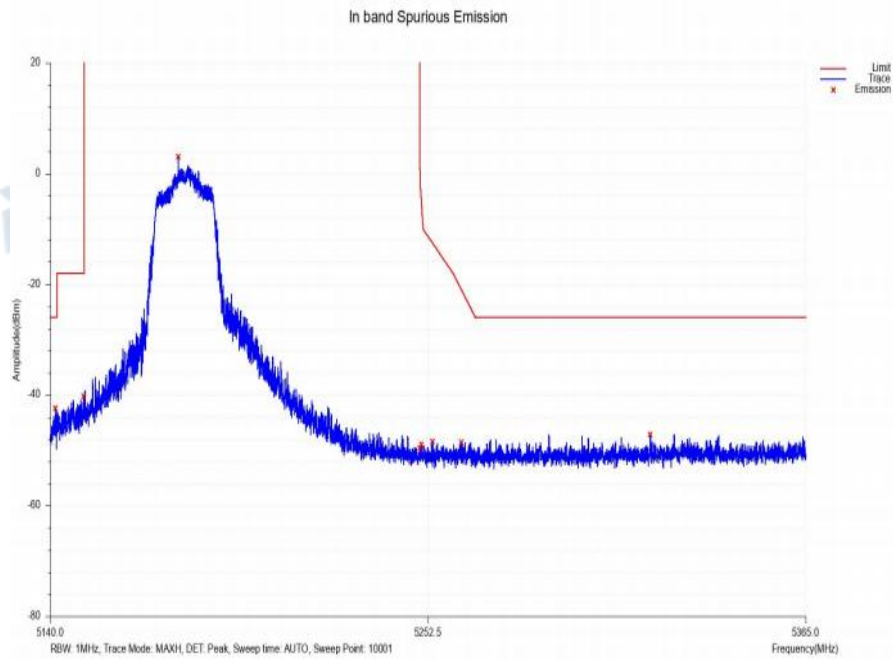


Out_of_band_NVNT_ANT1_802_11n(HT20)_5180

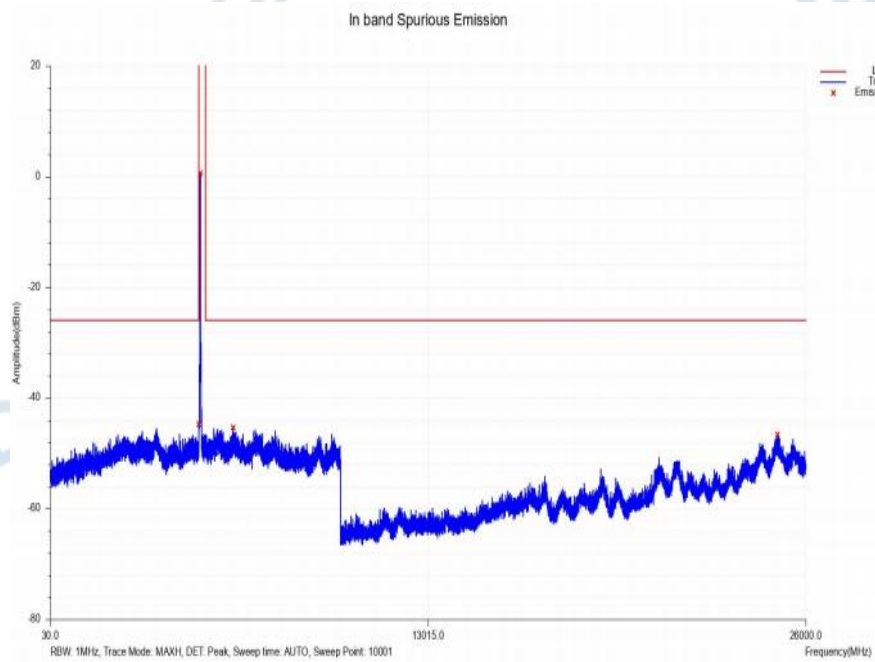


In_band_NVNT_ANT1_802_11n(HT20)_5200

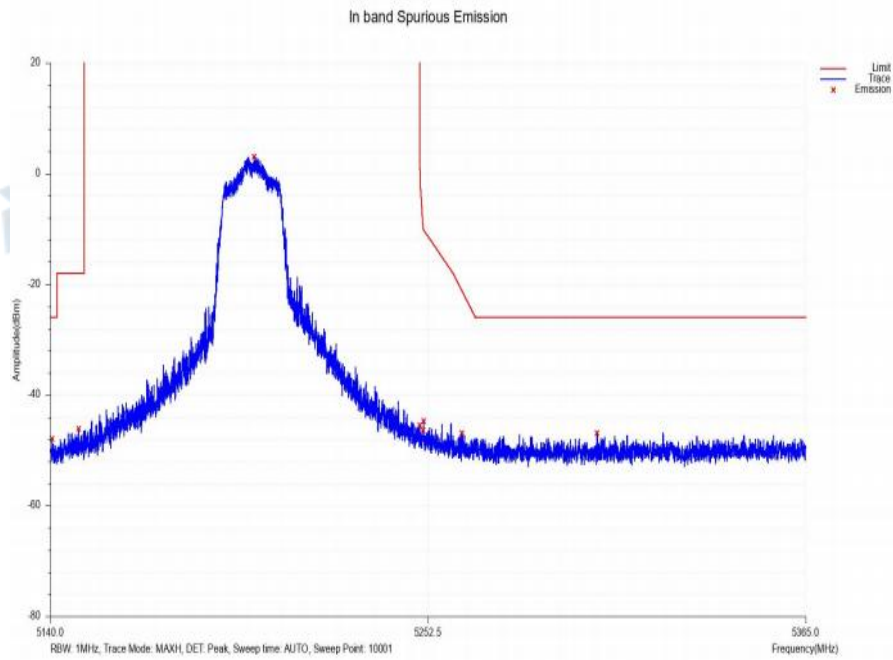


Out_of_band_NVNT_ANT1_802_11n(HT20)_5200

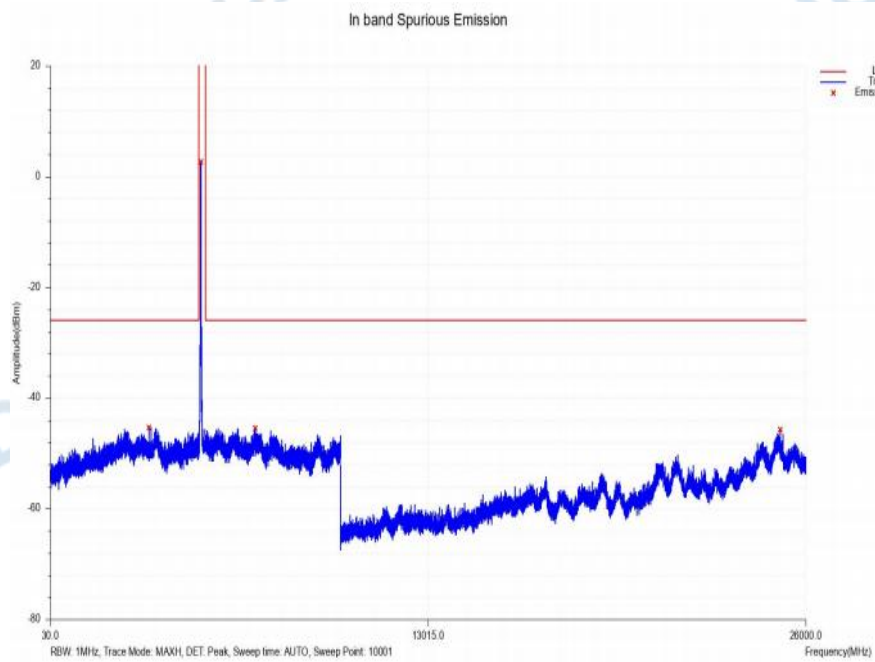


In_band_NVNT_ANT1_802_11n(HT20)_5240

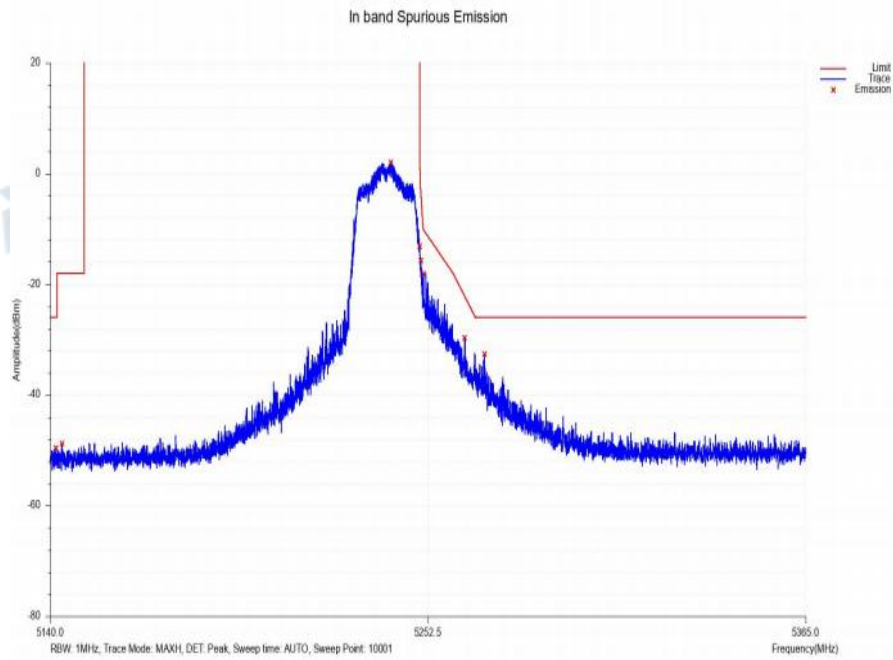


Out_of_band_NVNT_ANT1_802_11n(HT20)_5240

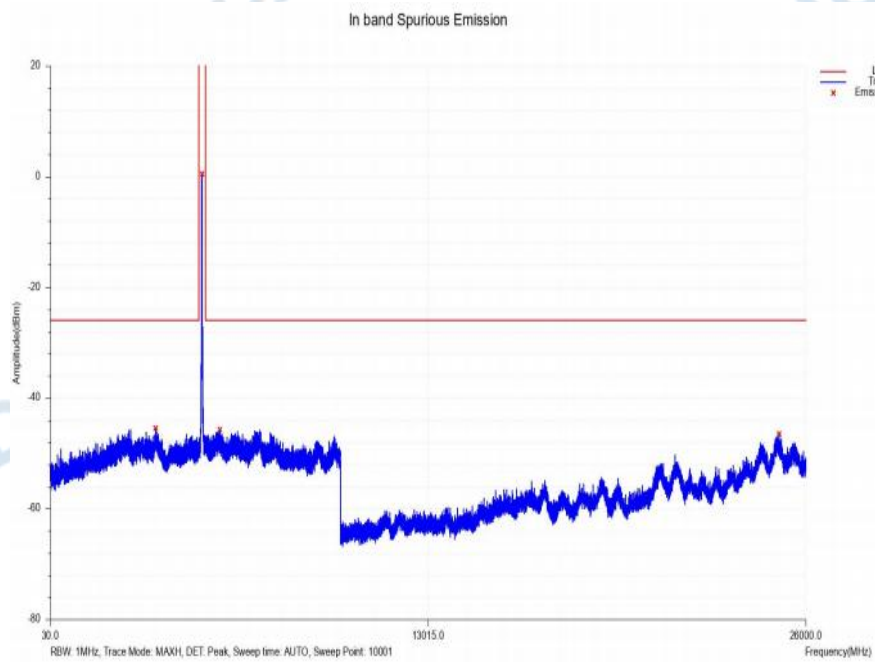


In_band_NVNT_ANT1_802_11ac(VHT20)_5180

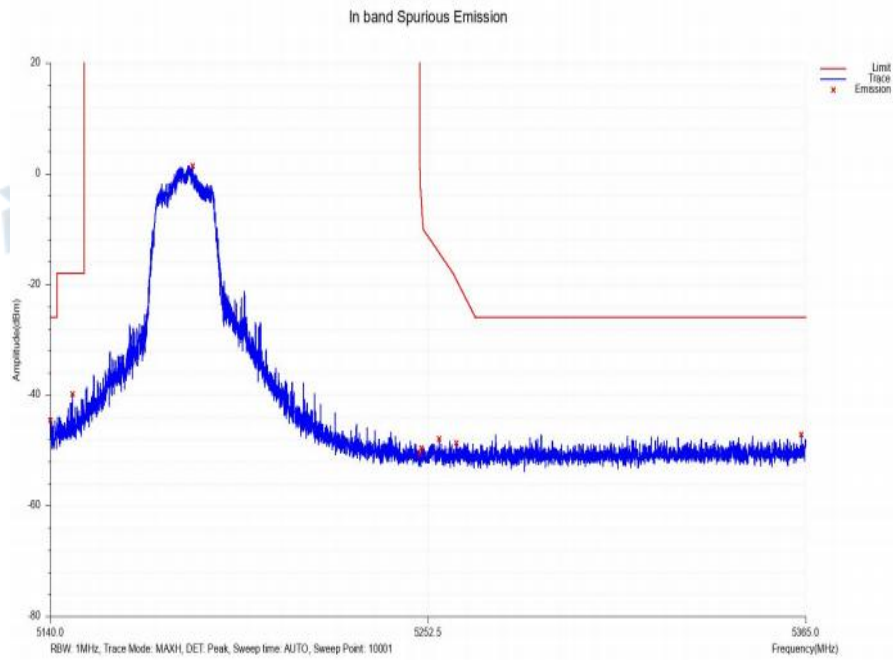


Out_of_band_NVNT_ANT1_802_11ac(VHT20)_5180

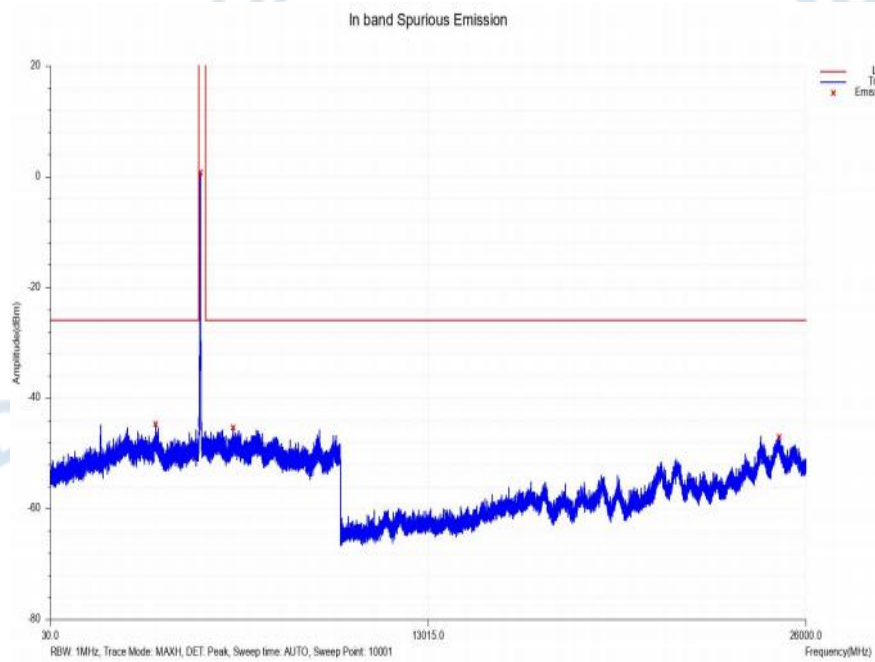


In_band_NVNT_ANT1_802_11ac(VHT20)_5200

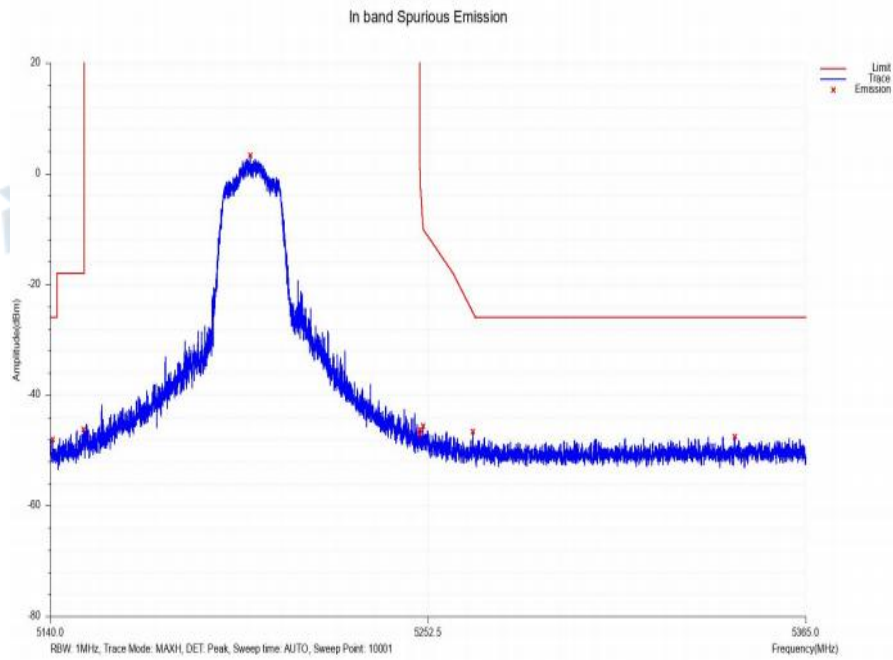


Out_of_band_NVNT_ANT1_802_11ac(VHT20)_5200

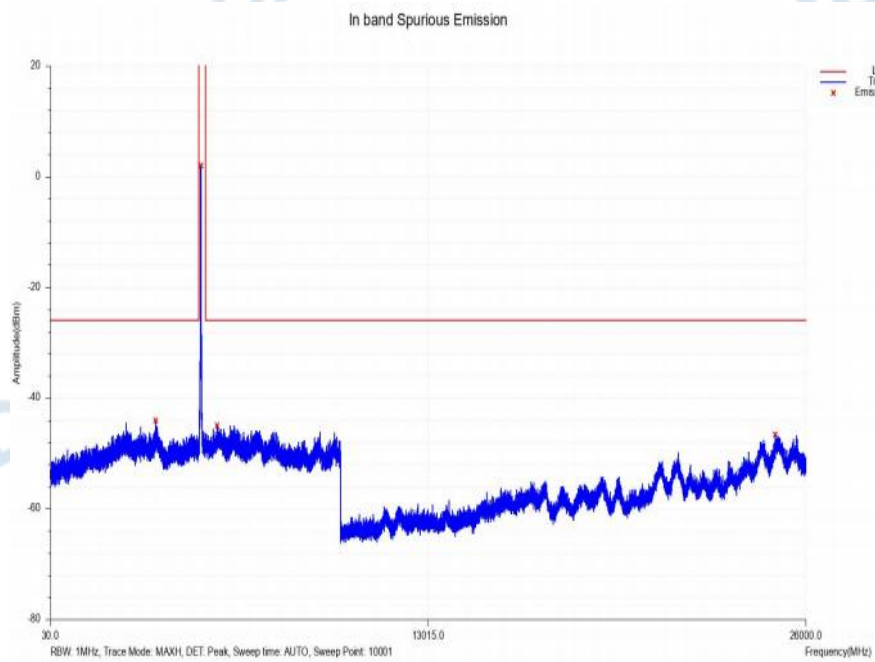


In_band_NVNT_ANT1_802_11ac(VHT20)_5240

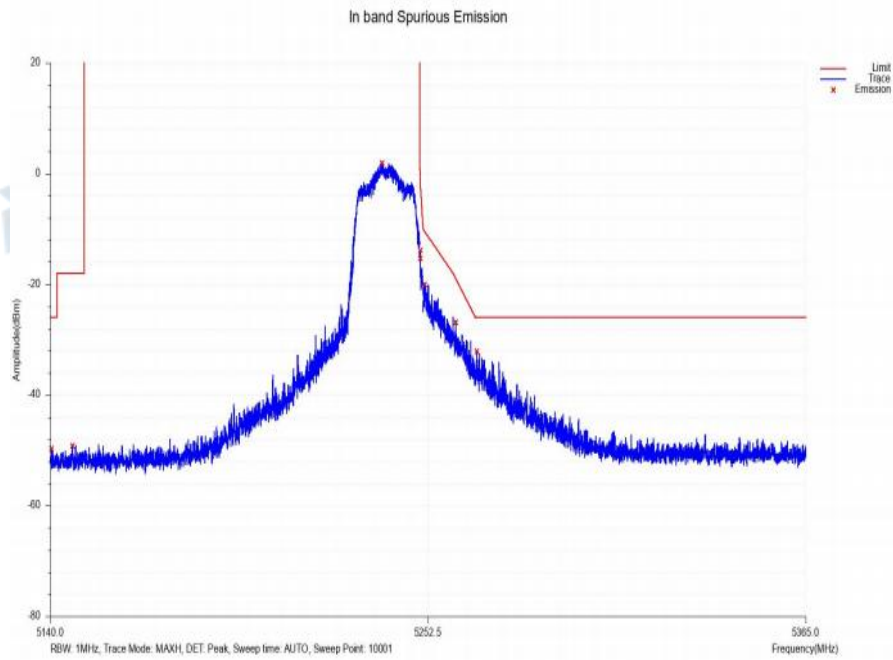


Out_of_band_NVNT_ANT1_802_11ac(VHT20)_5240

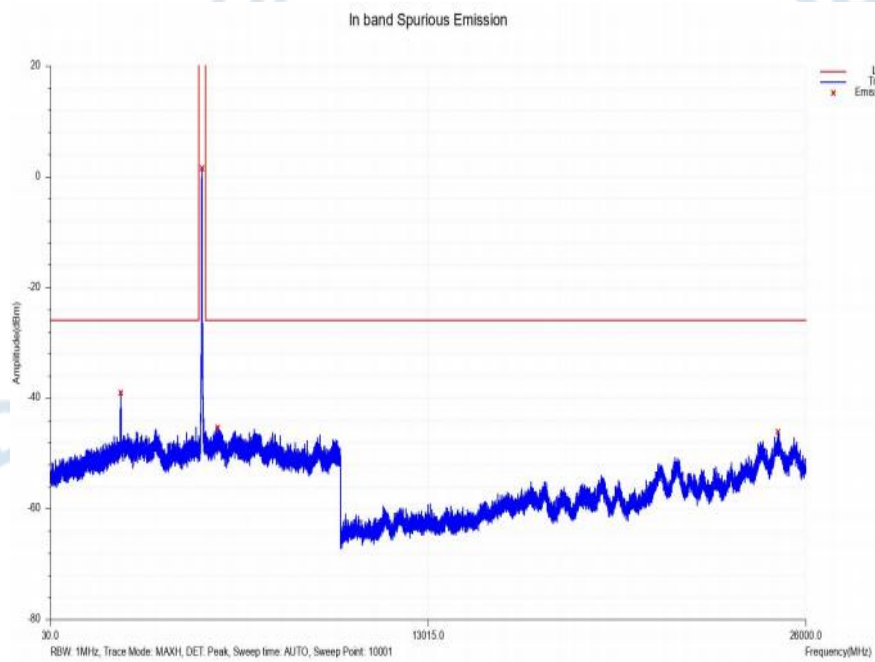


In_band_NVNT_ANT1_802_11n(HT40)_5190

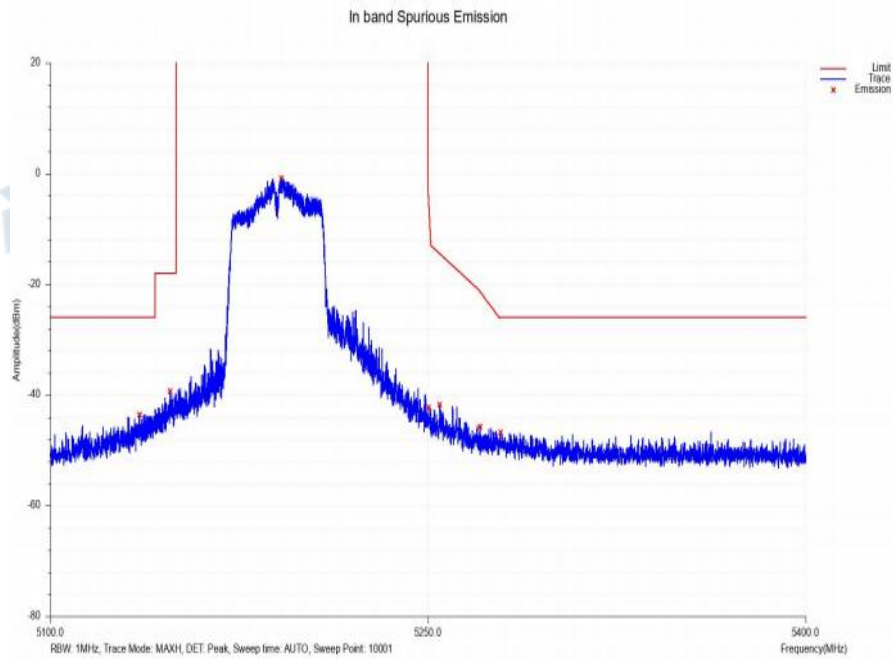


Out_of_band_NVNT_ANT1_802_11n(HT40)_5190

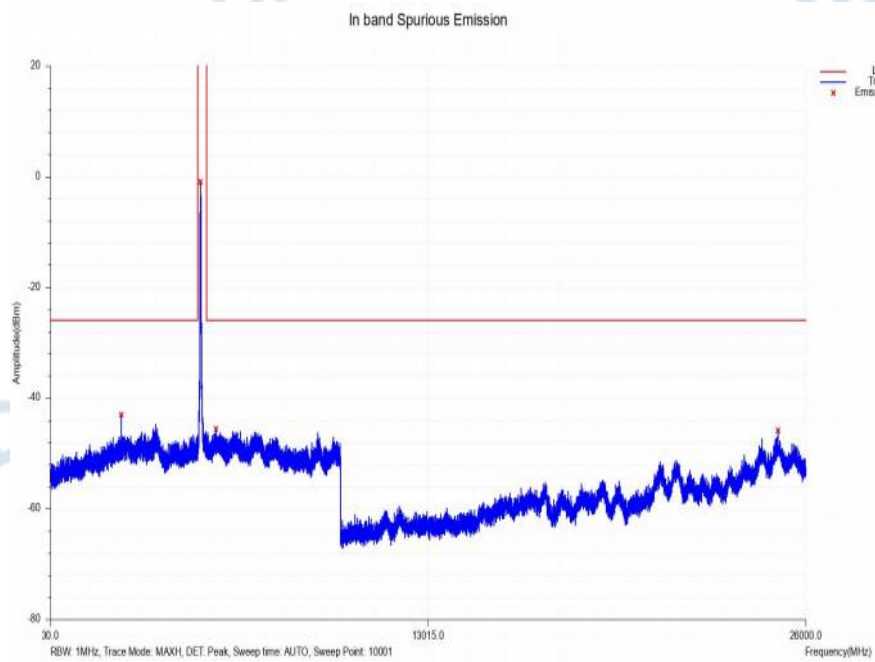


In_band_NVNT_ANT1_802_11n(HT40)_5230

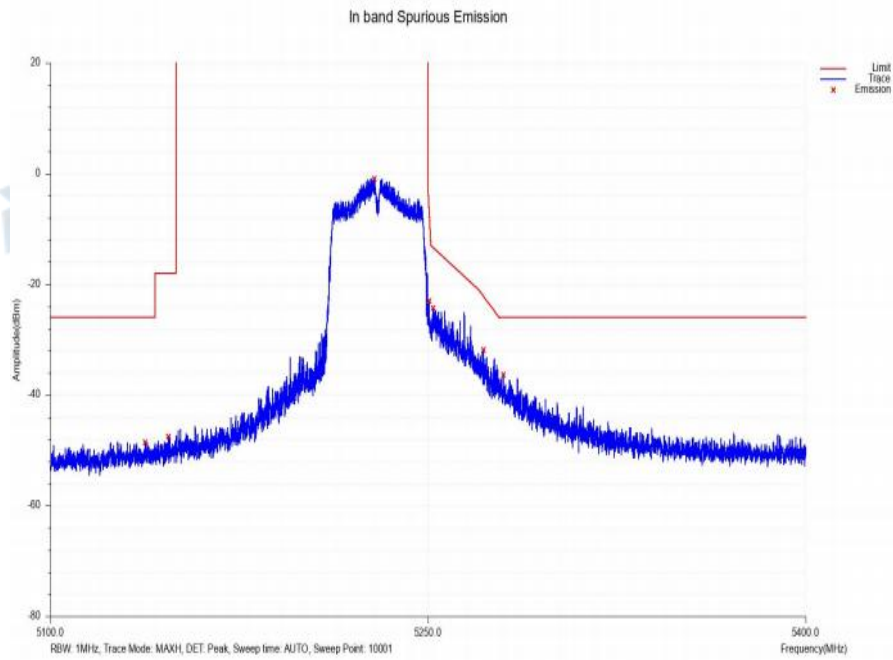


Out_of_band_NVNT_ANT1_802_11n(HT40)_5230

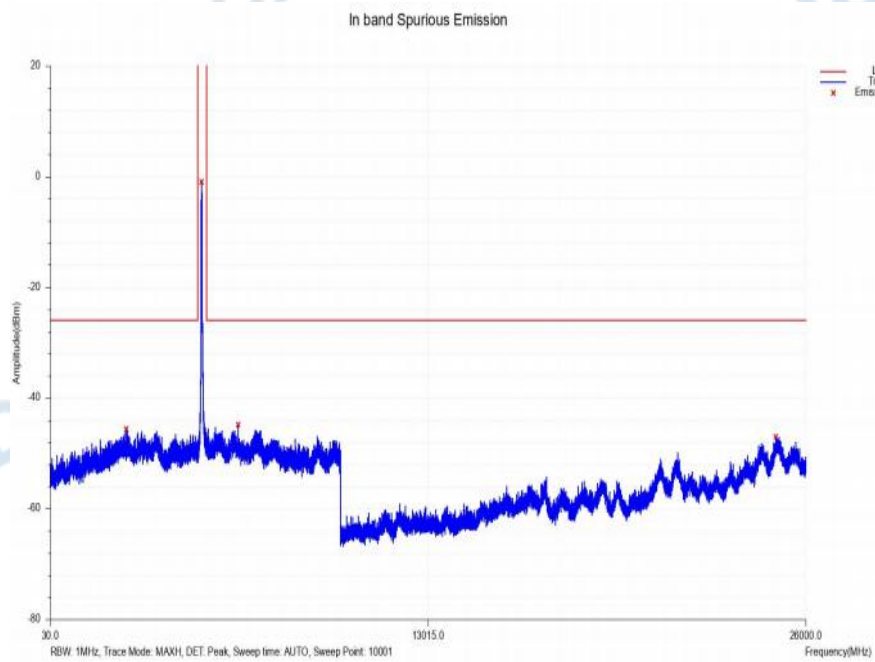


In_band_NVNT_ANT1_802_11ac(VHT40)_5190

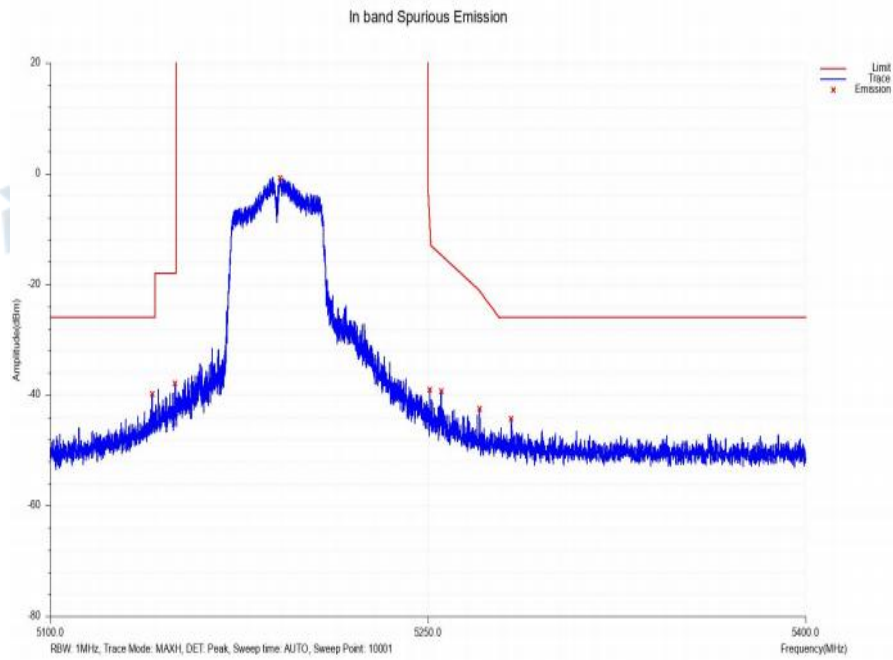


Out_of_band_NVNT_ANT1_802_11ac(VHT40)_5190

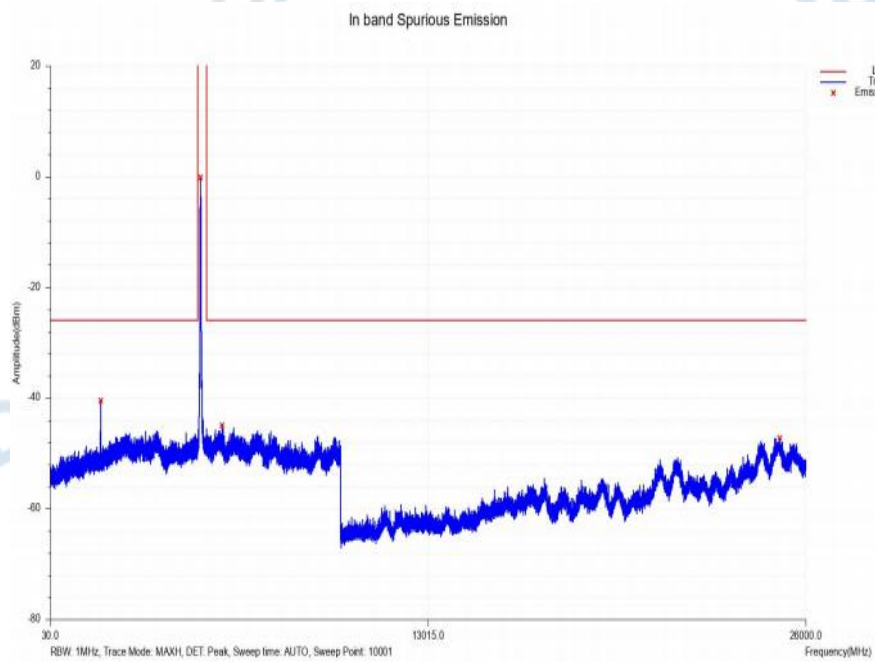


In_band_NVNT_ANT1_802_11ac(VHT40)_5230

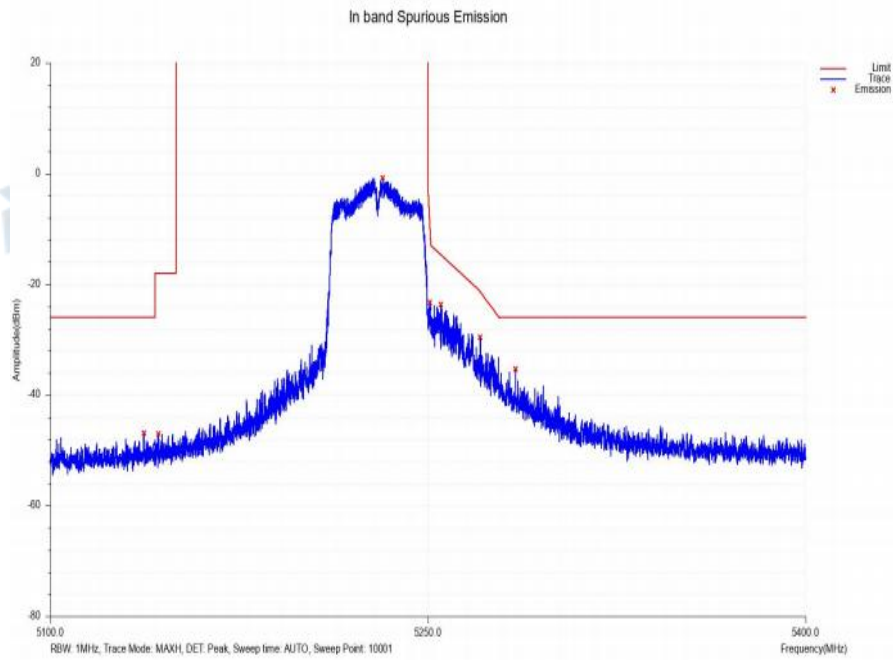


Out_of_band_NVNT_ANT1_802_11ac(VHT40)_5230

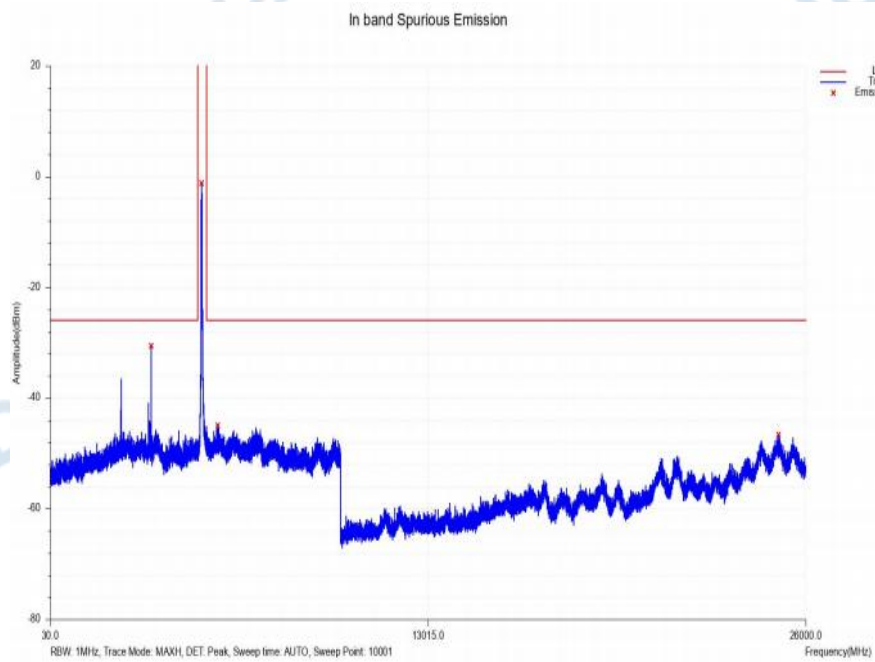

In_band_NVNT_ANT1_802_11ac(VHT80)_5210

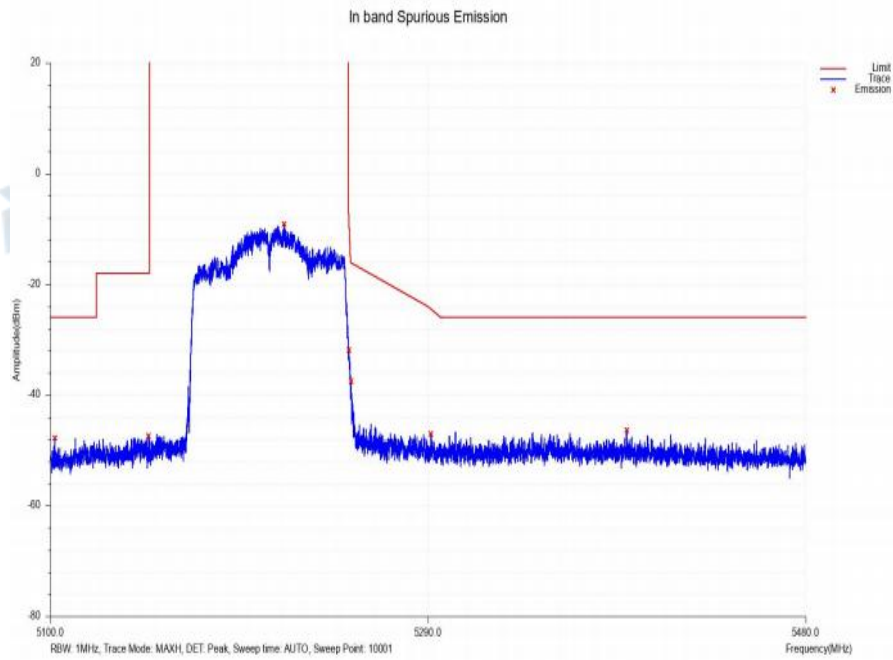


Out_of_band_NVNT_ANT1_802_11ac(VHT80)_5210

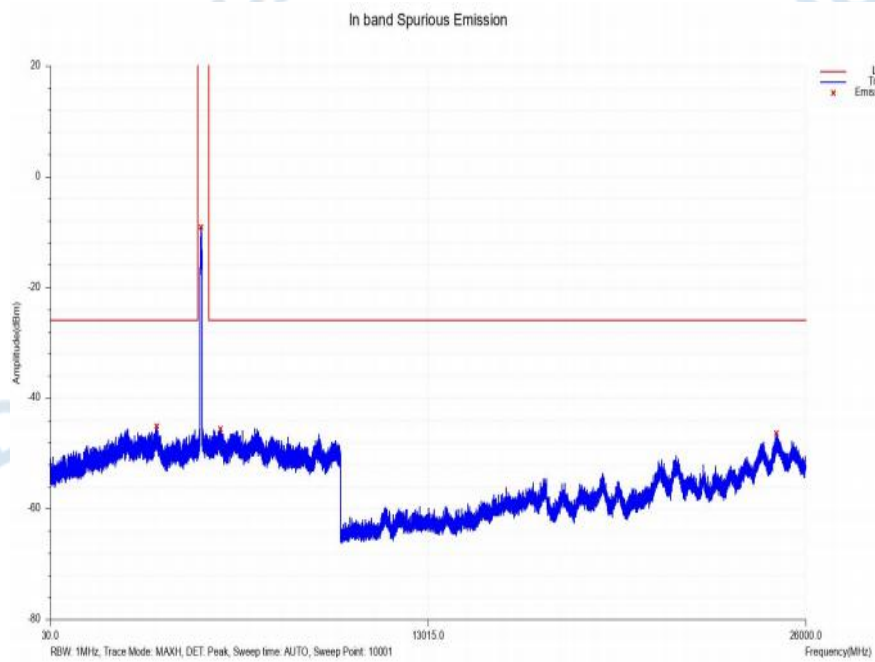

6. ACP Measure

Condition	Antenna	Mode	Frequency(MHz)	Frequency Offset(MHz)	Lower Level(dBc)	Upper Level(dBc)	Limit(dBc)	Result
NVNT	ANT1	802.11a	5180.00	20MHz	-32.88	-32.53	-25	Pass
NVNT	ANT1	802.11a	5180.00	40MHz	-46.80	-45.45	-40	Pass
NVNT	ANT1	802.11a	5200.00	20MHz	-30.60	-28.82	-25	Pass
NVNT	ANT1	802.11a	5200.00	40MHz	-45.98	-44.58	-40	Pass
NVNT	ANT1	802.11a	5240.00	20MHz	-29.47	-28.44	-25	Pass
NVNT	ANT1	802.11a	5240.00	40MHz	-44.10	-44.00	-40	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	20MHz	-31.26	-27.68	-25	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	40MHz	-46.25	-43.76	-40	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	20MHz	-31.07	-27.56	-25	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	40MHz	-46.50	-44.15	-40	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	20MHz	-29.85	-27.18	-25	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	40MHz	-45.39	-43.30	-40	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	20MHz	-31.09	-27.39	-25	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	40MHz	-47.38	-45.07	-40	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	20MHz	-31.44	-28.50	-25	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	40MHz	-46.42	-44.95	-40	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	20MHz	-29.05	-26.31	-25	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	40MHz	-43.90	-41.57	-40	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	40MHz	-36.61	-27.90	-25	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	80MHz	-48.21	-44.69	-40	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	40MHz	-34.43	-27.75	-25	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	80MHz	-48.31	-42.85	-40	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	40MHz	-36.05	-27.25	-25	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	80MHz	-48.51	-44.41	-40	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	40MHz	-34.18	-27.26	-25	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	80MHz	-48.01	-42.38	-40	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	80MHz	-41.01	-39.18	-25	Pass


ACP_Measure_NVNT_ANT1_802_11a_5180

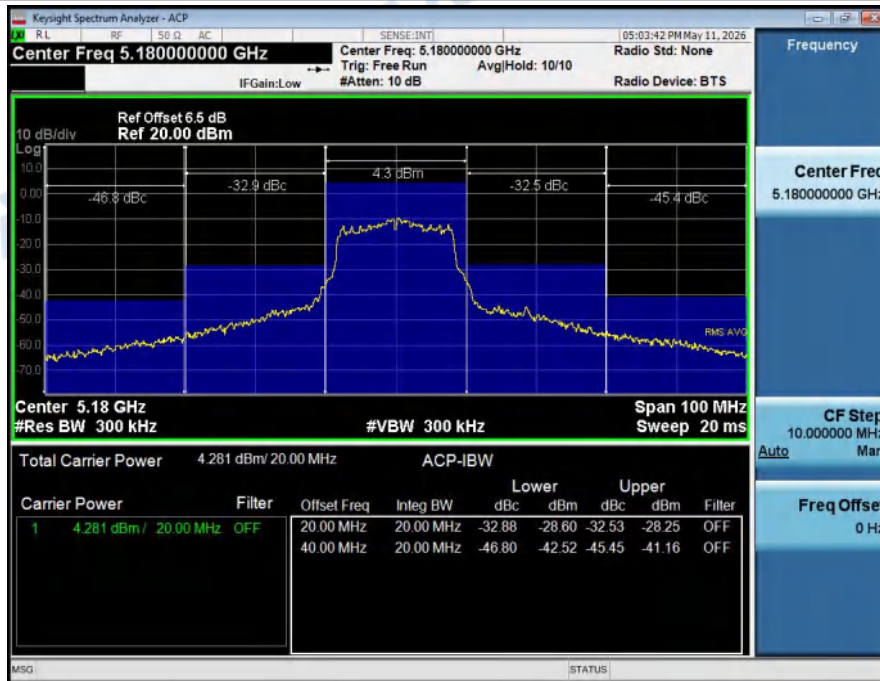

ACP_Measure_NVNT_ANT1_802_11a_5200



ACP_Measure_NVNT_ANT1_802_11a_5240

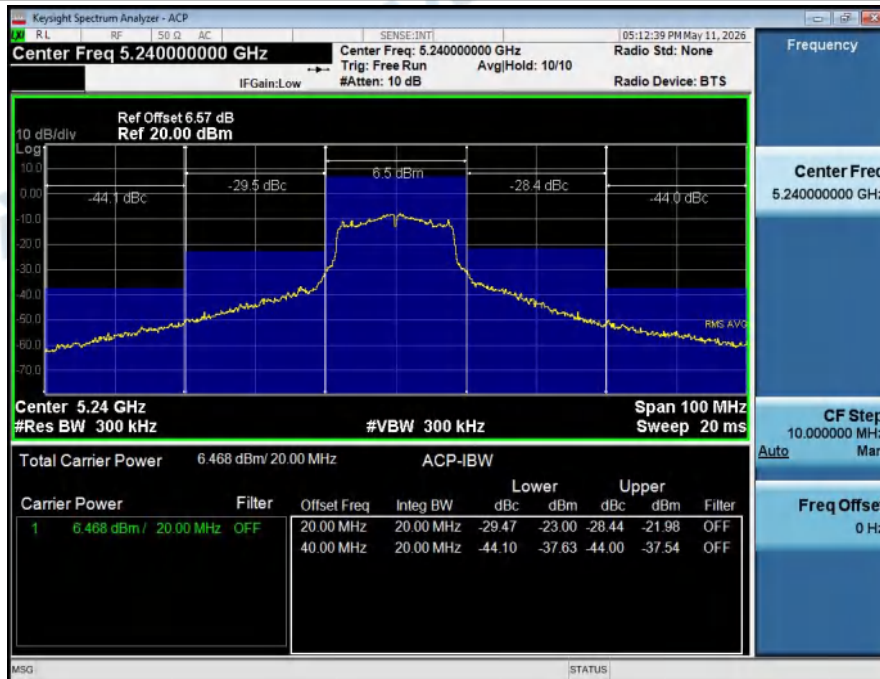

ACP_Measure_NVNT_ANT1_802_11n(HT20)_5180



ACP_Measure_NVNT_ANT1_802_11n(HT20)_5200



ACP_Measure_NVNT_ANT1_802_11n(HT20)_5240




ACP_Measure_NVNT_ANT1_802_11ac(VHT20)_5180



ACP_Measure_NVNT_ANT1_802_11ac(VHT20)_5200




ACP_Measure_NVNT_ANT1_802_11ac(VHT20)_5240

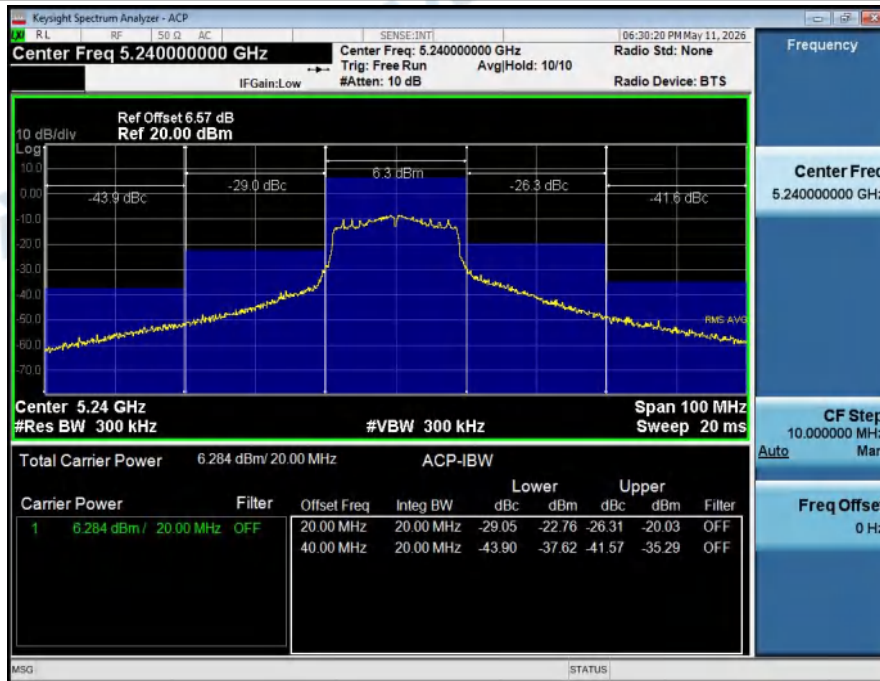

ACP_Measure_NVNT_ANT1_802_11n(HT40)_5190




ACP_Measure_NVNT_ANT1_802_11n(HT40)_5230

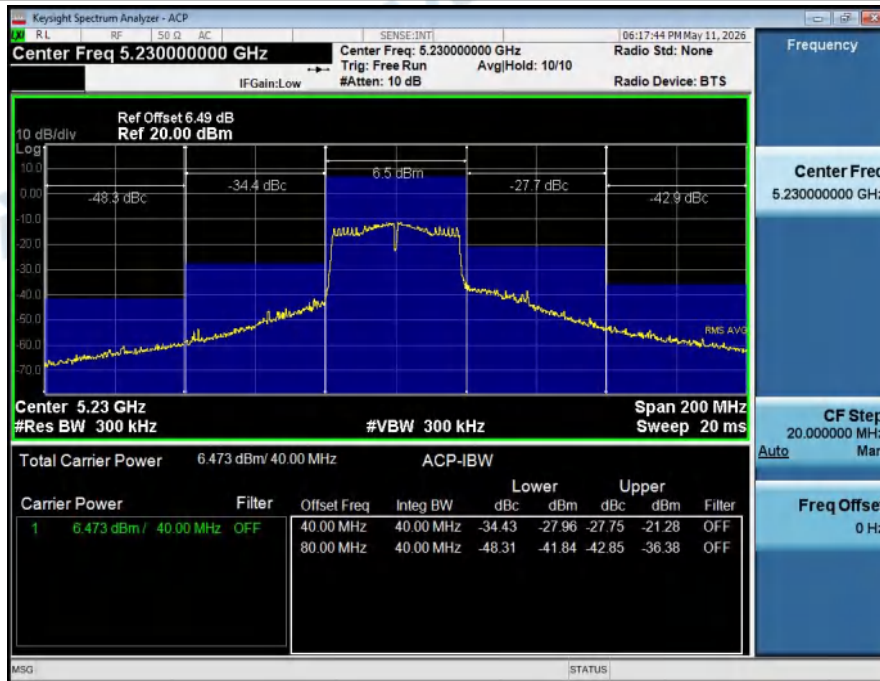

ACP_Measure_NVNT_ANT1_802_11ac(VHT40)_5190



ACP_Measure_NVNT_ANT1_802_11ac(VHT40)_5230

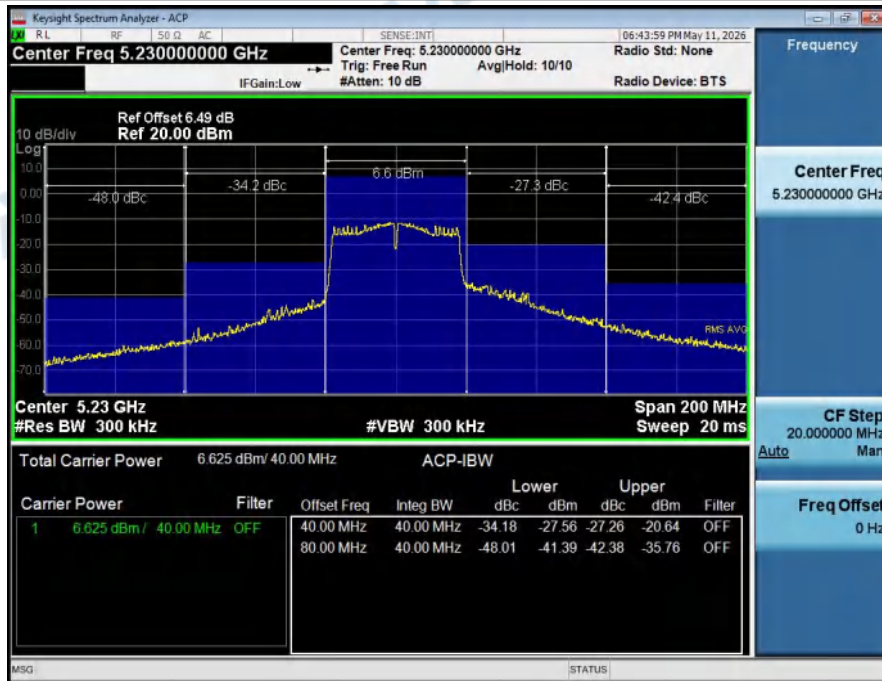


ACP_Measure_NVNT_ANT1_802_11ac(VHT80)_5210




7. Frequency Tolerance

Condition	Antenna	Modulation	Frequency (MHz)	Test Frequency(MHz)	Frequency Tolerance(ppm)	Limit(ppm)	Result
NTNV	ANT1	802.11a	5180.00	5179.951	-9.459	±20	Pass
NTLV	ANT1	802.11a	5180.00	5179.951	-9.459	±20	Pass
NTHV	ANT1	802.11a	5180.00	5179.951	-9.459	±20	Pass
NTNV	ANT1	802.11a	5200.00	5199.950	-9.615	±20	Pass
NTLV	ANT1	802.11a	5200.00	5199.950	-9.615	±20	Pass
NTHV	ANT1	802.11a	5200.00	5199.950	-9.615	±20	Pass
NTNV	ANT1	802.11a	5240.00	5239.949	-9.733	±20	Pass
NTLV	ANT1	802.11a	5240.00	5239.949	-9.733	±20	Pass
NTHV	ANT1	802.11a	5240.00	5239.949	-9.733	±20	Pass


Frequency_Tolerance_NTNV_ANT1_802_11a_5180_20M

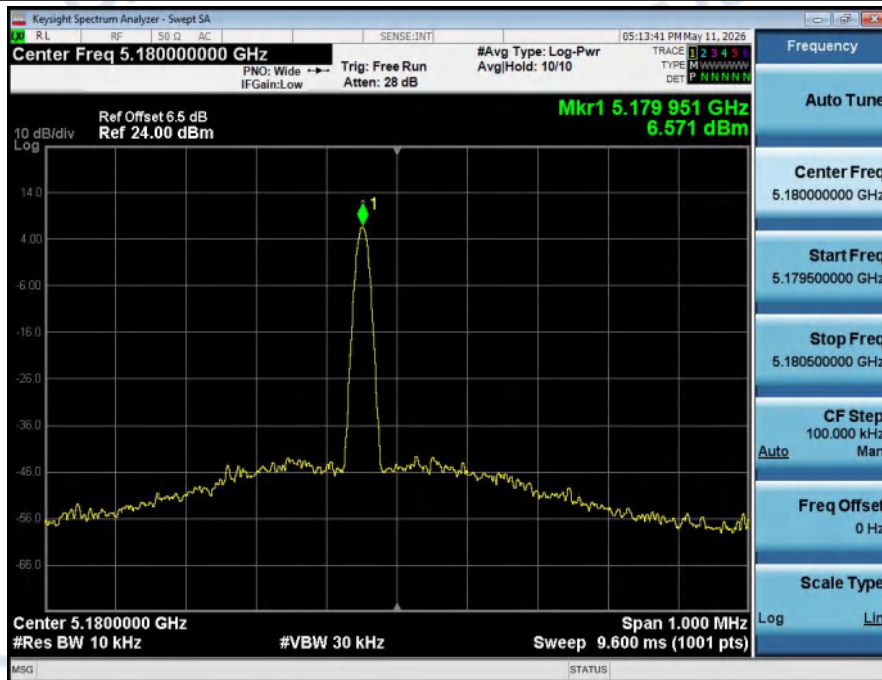


Frequency_Tolerance_NTLV_ANT1_802_11a_5180_20M

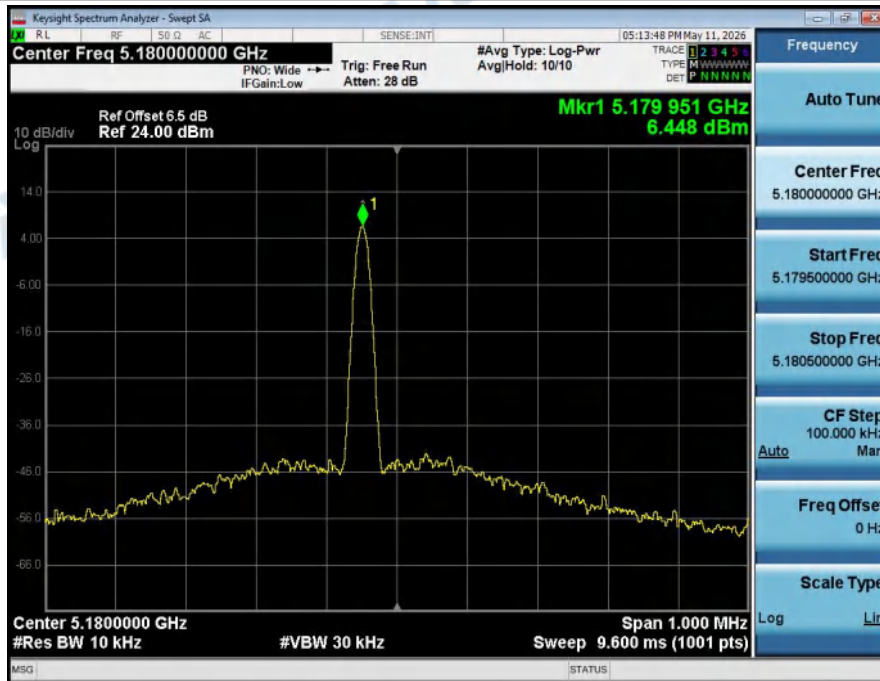


Frequency_Tolerance_NTHV_ANT1_802_11a_5180_20M

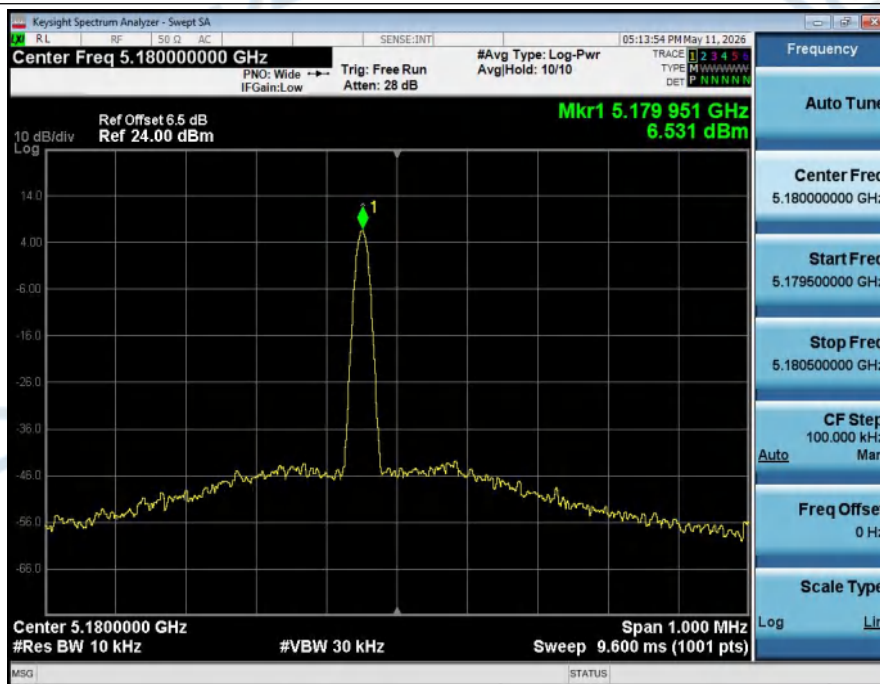


Frequency_Tolerance_NTNV_ANT1_802_11a_5200_20M

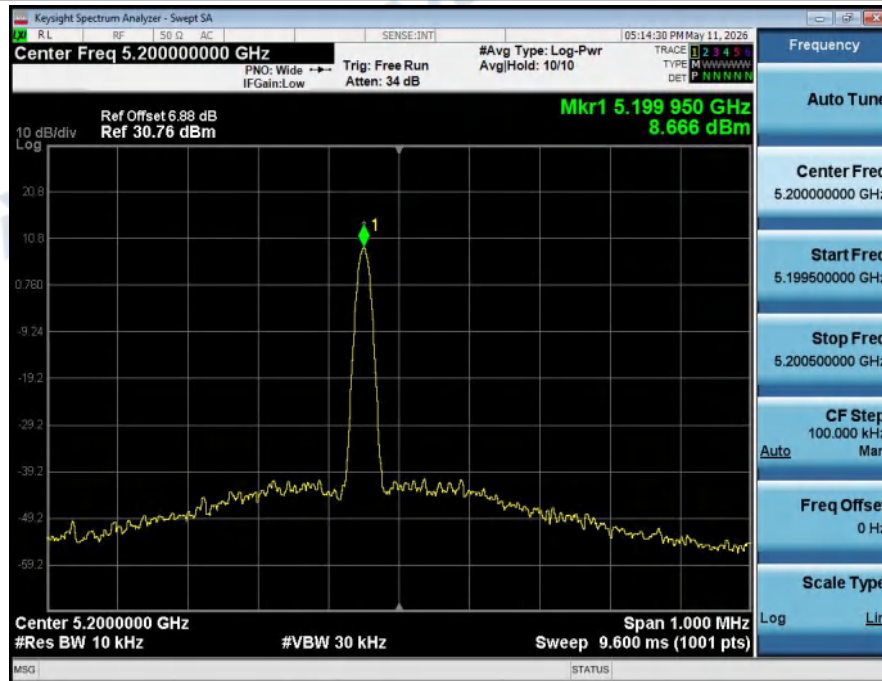


Frequency_Tolerance_NTLV_ANT1_802_11a_5200_20M

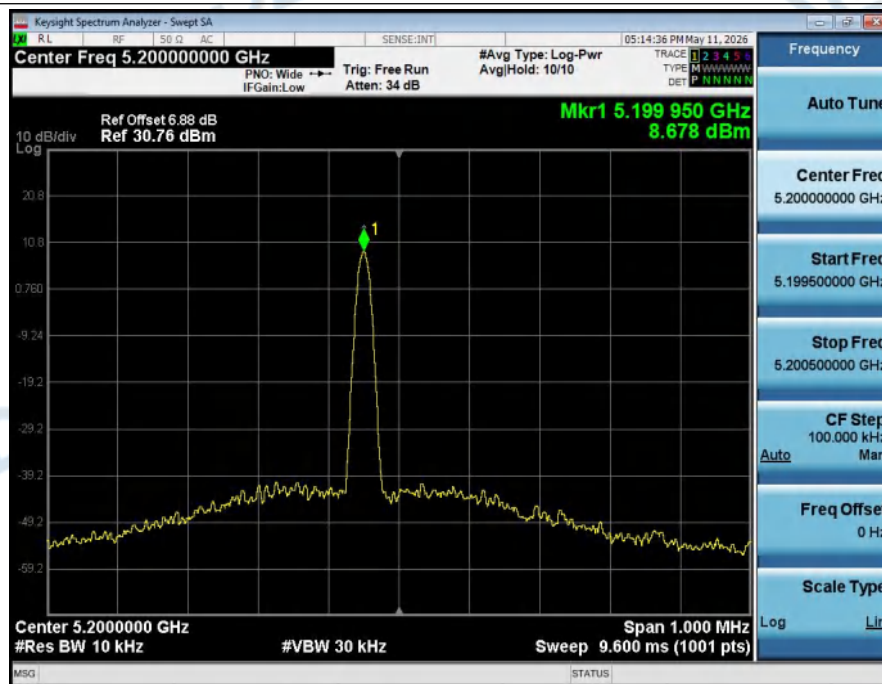


Frequency_Tolerance_NTHV_ANT1_802_11a_5200_20M

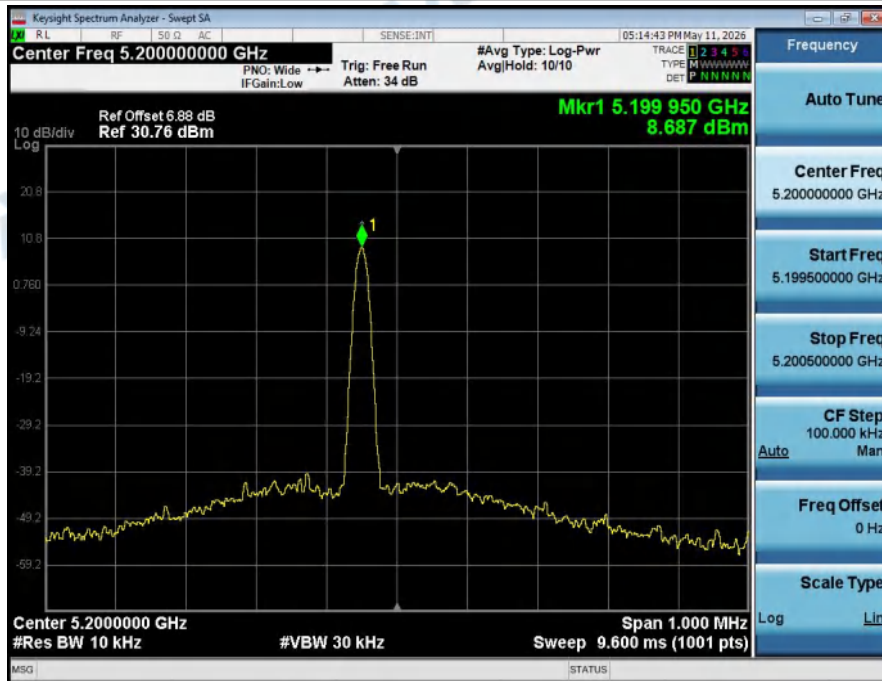


Frequency_Tolerance_NTNV_ANT1_802_11a_5240_20M

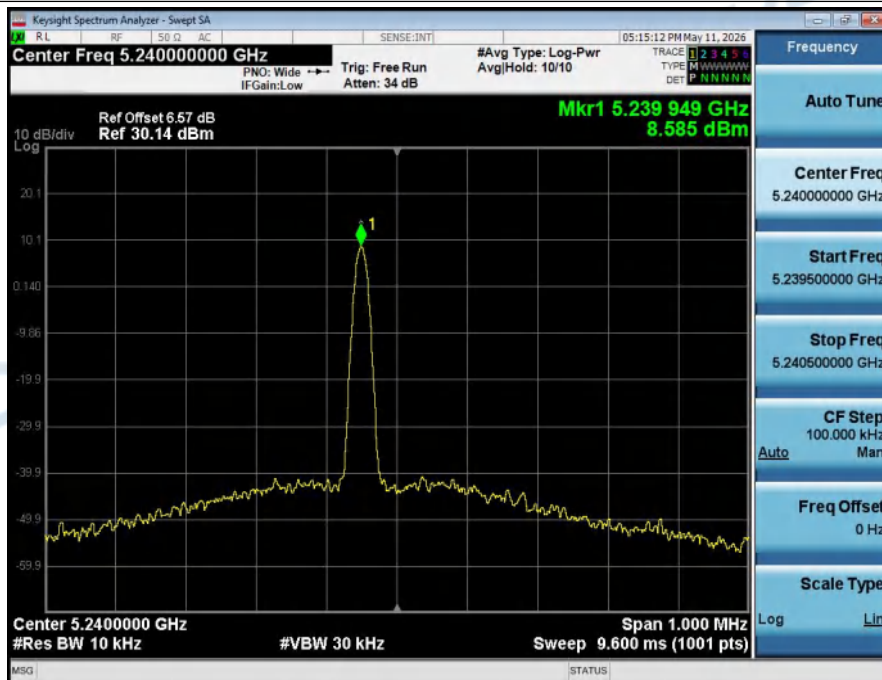

Frequency_Tolerance_NTLV_ANT1_802_11a_5240_20M

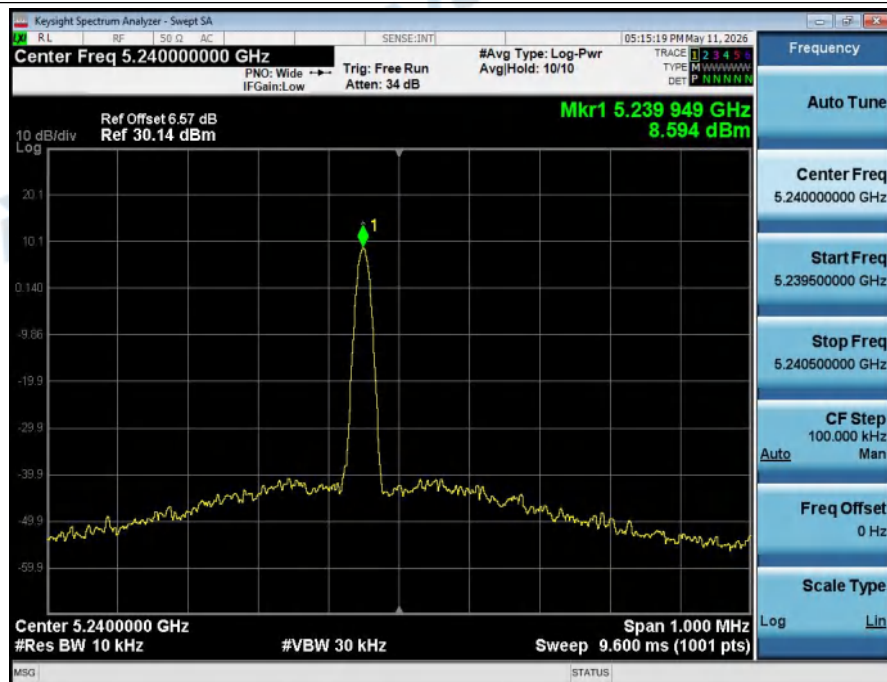


Frequency_Tolerance_NTHV_ANT1_802_11a_5240_20M

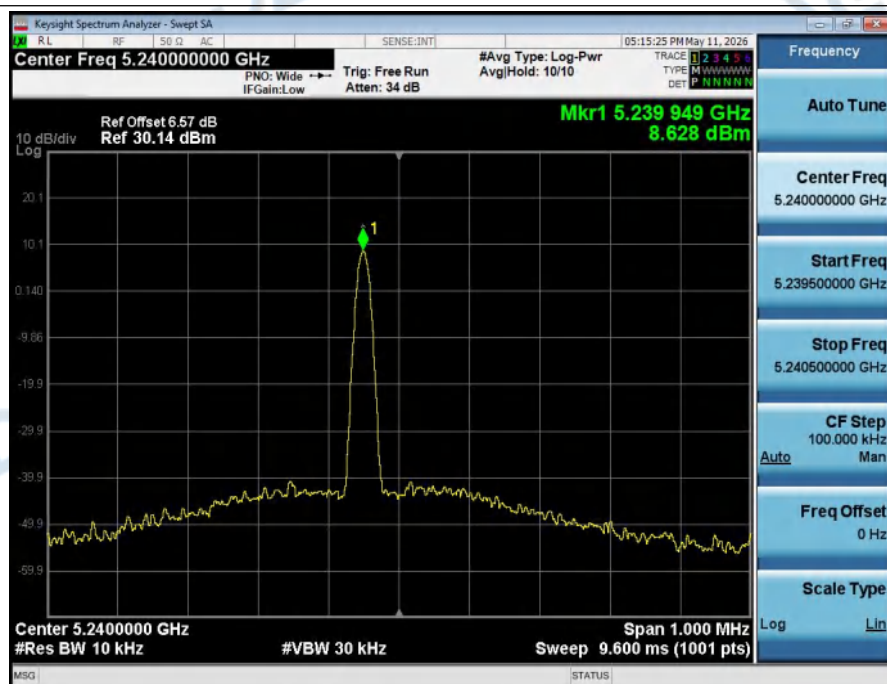


8. Secondary emission of radio wave

Condition	Mode	Channel	Range (MHz)	RBW (kHz)	Spur. Freq. (MHz)	Spur. Lev. (dBm)	Spur. Lev	Limit	Over 1/10 Limit	Read Lev. (dBm)	Read Lev.	Result
NVNT	802.11a	LCH	30.0~1000.0	100	984.48	-84.51	0.0035nW	4nW	NO	/	/	Pass
NVNT	802.11a	LCH	1000.0~13000.0	1000	5176.00	-61.71	0.6740nW	20nW	NO	/	/	Pass
NVNT	802.11a	MCH	30.0~1000.0	100	968.96	-84.52	0.0035nW	4nW	NO	/	/	Pass
NVNT	802.11a	MCH	1000.0~13000.0	1000	1756.00	-55.24	2.9919nW	20nW	NO	/	/	Pass
NVNT	802.11a	HCH	30.0~1000.0	100	882.63	-83.69	0.0042nW	4nW	NO	/	/	Pass
NVNT	802.11a	HCH	1000.0~13000.0	1000	5176.00	-61.94	0.6392nW	20nW	NO	/	/	Pass
NVNT	802.11n(HT20)	LCH	30.0~1000.0	100	451.95	-84.55	0.0035nW	4nW	NO	/	/	Pass
NVNT	802.11n(HT20)	LCH	1000.0~13000.0	1000	5176.00	-61.60	0.6910nW	20nW	NO	/	/	Pass
NVNT	802.11n(HT20)	MCH	30.0~1000.0	100	884.57	-83.94	0.0040nW	4nW	NO	/	/	Pass
NVNT	802.11n(HT20)	MCH	1000.0~13000.0	1000	5176.00	-61.38	0.7281nW	20nW	NO	/	/	Pass
NVNT	802.11n(HT20)	HCH	30.0~1000.0	100	845.77	-84.09	0.0038nW	4nW	NO	/	/	Pass
NVNT	802.11n(HT20)	HCH	1000.0~13000.0	1000	1756.00	-54.39	3.6361nW	20nW	NO	/	/	Pass
NVNT	802.11ac(VHT20)	LCH	30.0~1000.0	100	828.31	-70.52	0.0886nW	4nW	NO	/	/	Pass
NVNT	802.11ac(VHT20)	LCH	1000.0~13000.0	1000	5188.00	-61.75	0.6686nW	20nW	NO	/	/	Pass
NVNT	802.11ac(VHT20)	MCH	30.0~1000.0	100	504.33	-84.04	0.0039nW	4nW	NO	/	/	Pass
NVNT	802.11ac(VHT20)	MCH	1000.0~13000.0	1000	5176.00	-62.00	0.6308nW	20nW	NO	/	/	Pass
NVNT	802.11ac(VHT20)	HCH	30.0~1000.0	100	909.79	-83.96	0.0040nW	4nW	NO	/	/	Pass
NVNT	802.11ac(VHT20)	HCH	1000.0~13000.0	1000	1744.00	-57.82	1.6516nW	20nW	NO	/	/	Pass
NVNT	802.11n(HT40)	LCH	30.0~1000.0	100	732.28	-84.22	0.0037nW	4nW	NO	/	/	Pass
NVNT	802.11n(HT40)	LCH	1000.0~13000.0	1000	5176.00	-61.96	0.6366nW	20nW	NO	/	/	Pass
NVNT	802.11n(HT40)	HCH	30.0~1000.0	100	785.63	-84.40	0.0036nW	4nW	NO	/	/	Pass
NVNT	802.11n(HT40)	HCH	1000.0~13000.0	1000	5176.00	-61.88	0.6488nW	20nW	NO	/	/	Pass
NVNT	802.11ac(VHT40)	LCH	30.0~1000.0	100	863.23	-84.33	0.0036nW	4nW	NO	/	/	Pass
NVNT	802.11ac(VHT40)	LCH	1000.0~13000.0	1000	5176.00	-62.01	0.6296nW	20nW	NO	/	/	Pass
NVNT	802.11ac(VHT40)	HCH	30.0~1000.0	100	828.84	-56.93	2.0283nW	4nW	YES	-61.18	0.7620nW	Pass
NVNT	802.11ac(VHT40)	HCH	1000.0~13000.0	1000	5176.00	-62.56	0.5545nW	20nW	NO	/	/	Pass
NVNT	802.11ac(VHT80)	MCH	30.0~1000.0	100	722.58	-83.21	0.0047nW	4nW	NO	/	/	Pass
NVNT	802.11ac(VHT80)	MCH	1000.0~13000.0	1000	5284.00	-64.37	0.3660nW	20nW	NO	/	/	Pass


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11a_LCH

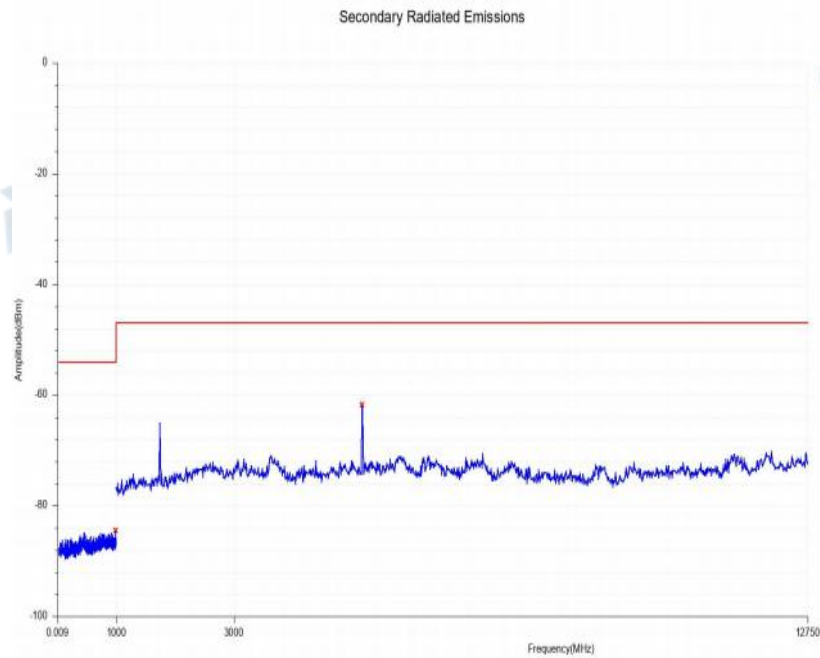


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11a_MCH

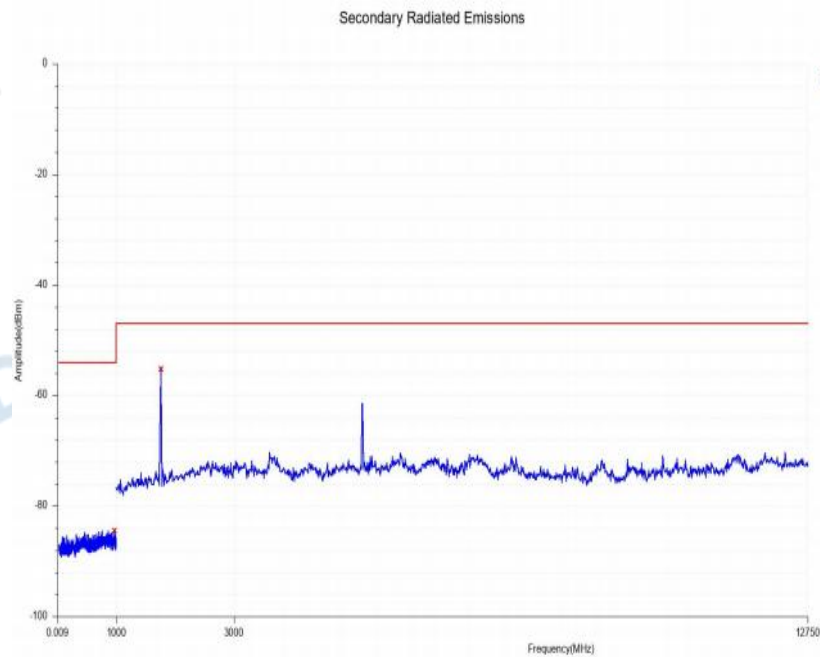


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11a_HCH

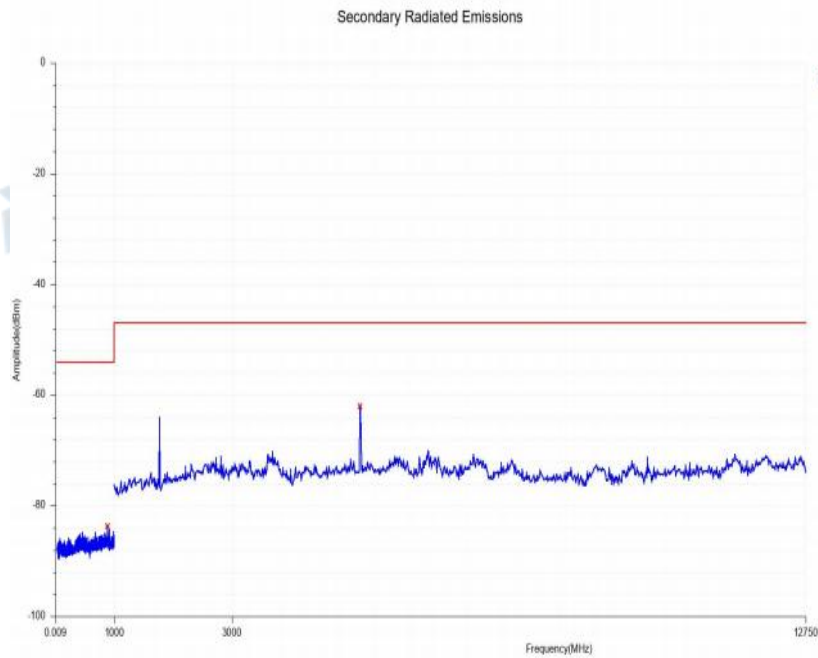


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11n(HT20)_LCH

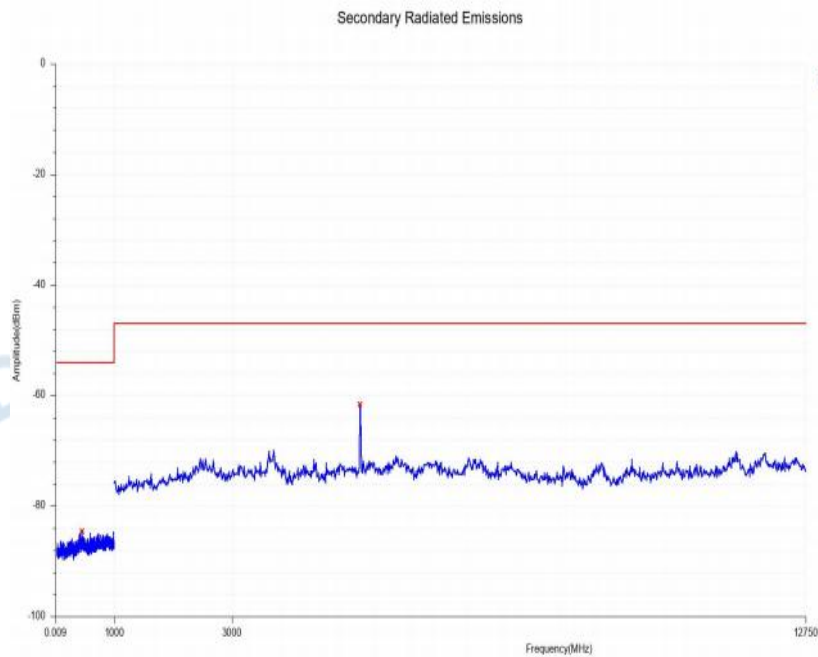


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11n(HT20)_MCH

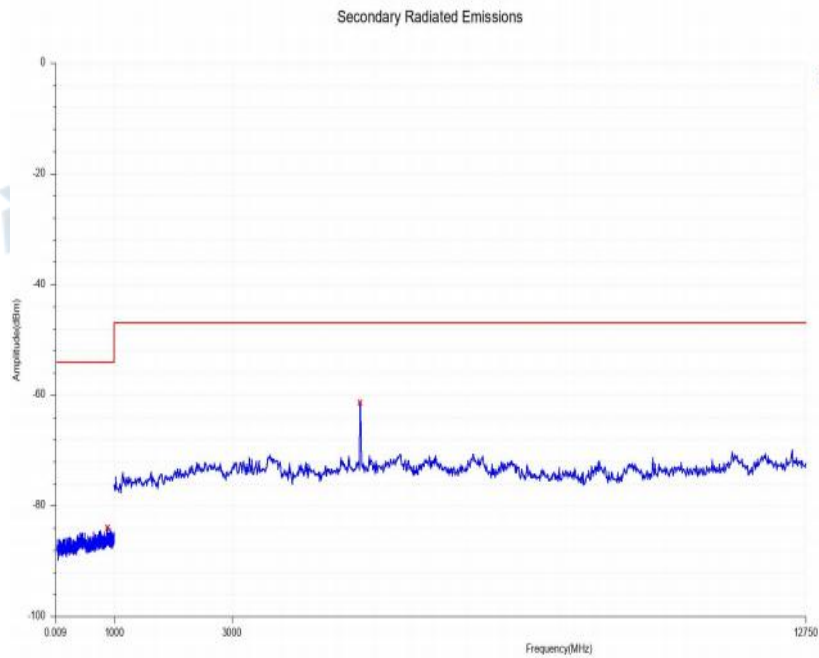


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11n(HT20)_HCH

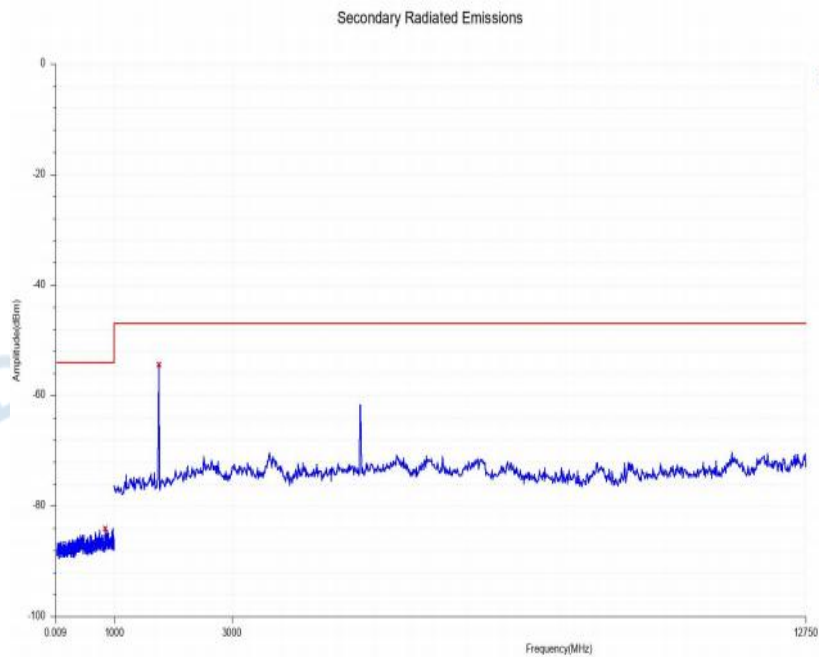


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11ac(VHT20)_LCH

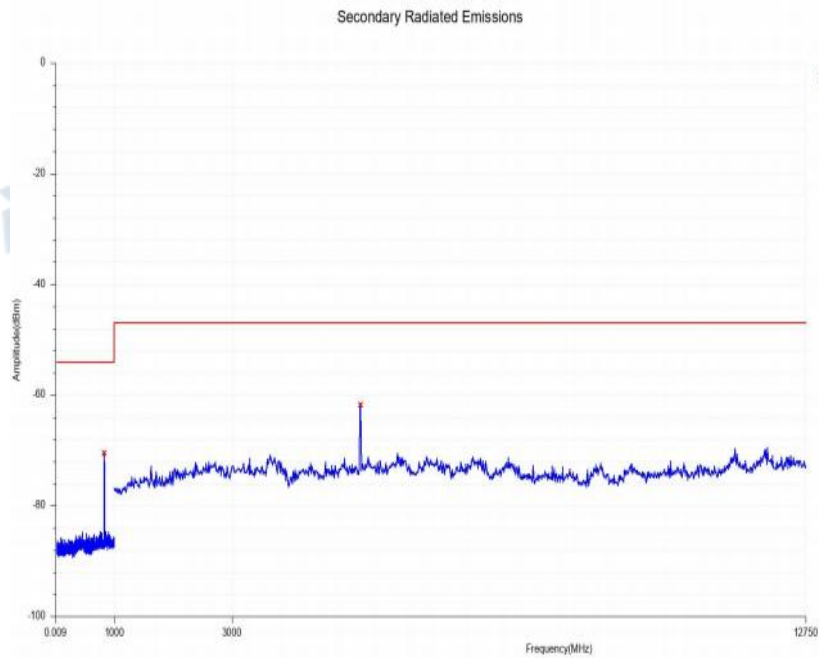


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11ac(VHT20)_MCH

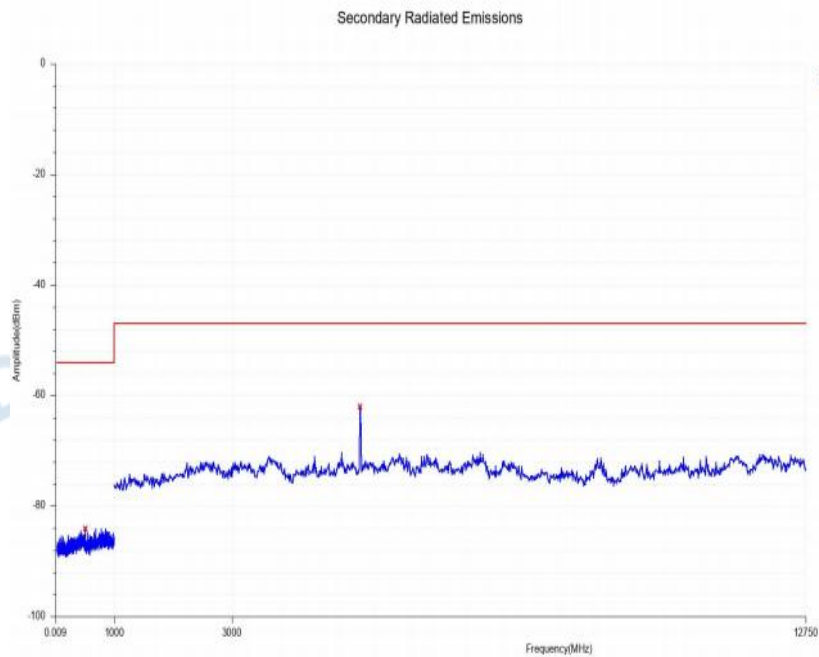


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11ac(VHT20)_HCH

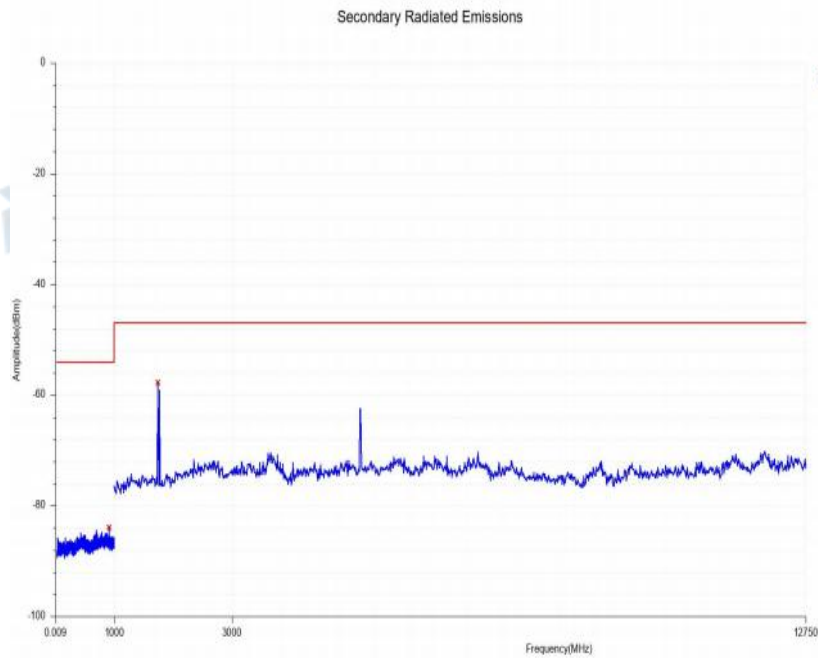


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11n(HT40)_LCH

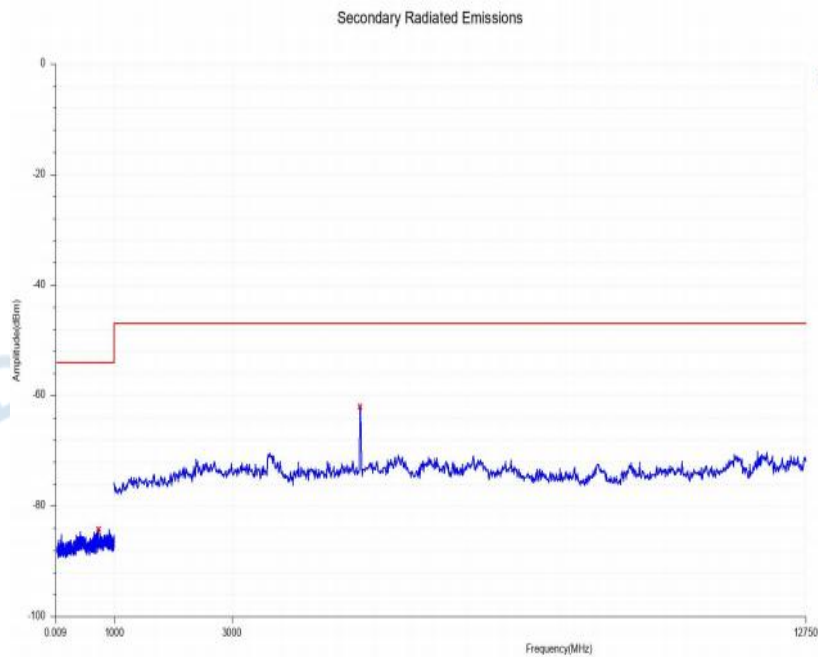


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11n(HT40)_HCH

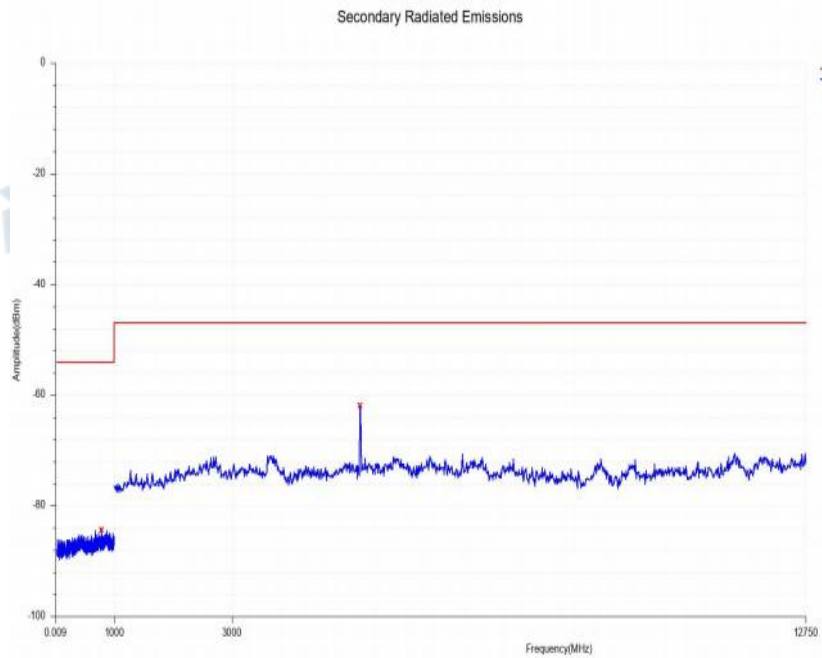

Secondary_emission_of_radio_wave_NVNT_ANT1_802_11ac(VHT40)_LCH

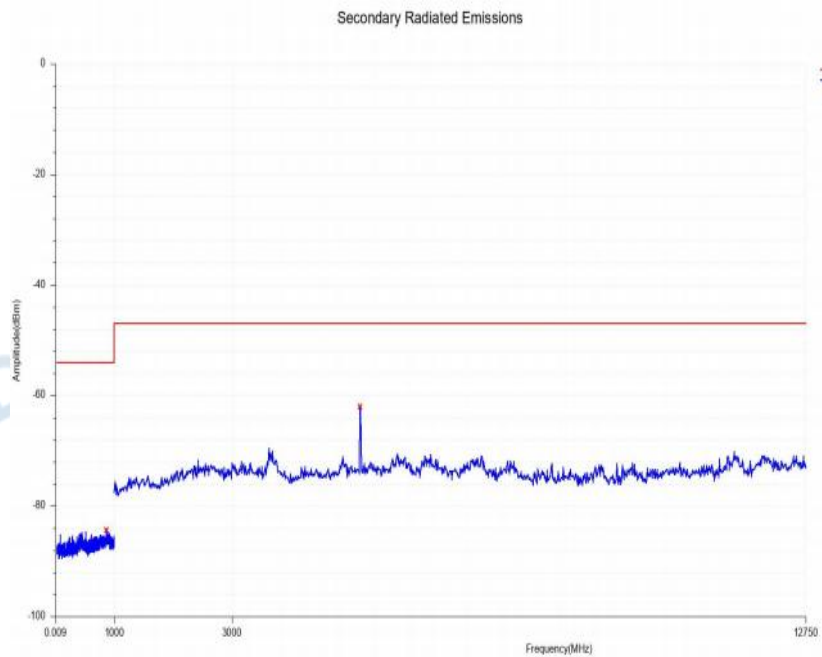


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11ac(VHT40)_HCH

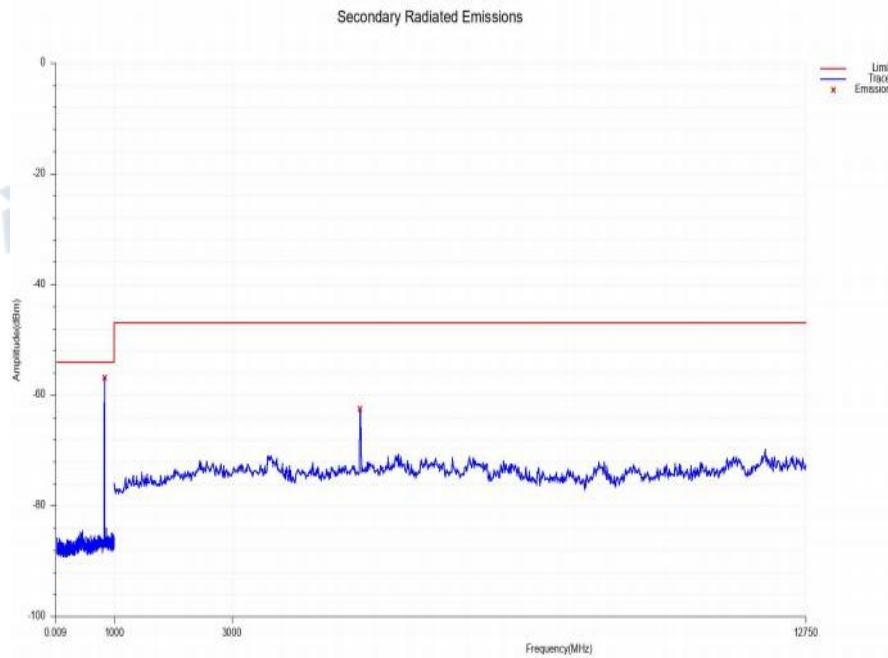

1k_Sample_NVNT_ANT1_802_11ac(VHT40)_HCH_828_84MHz



Secondary_emission_of_radio_wave_NVNT_ANT1_802_11ac(VHT80)_MCH

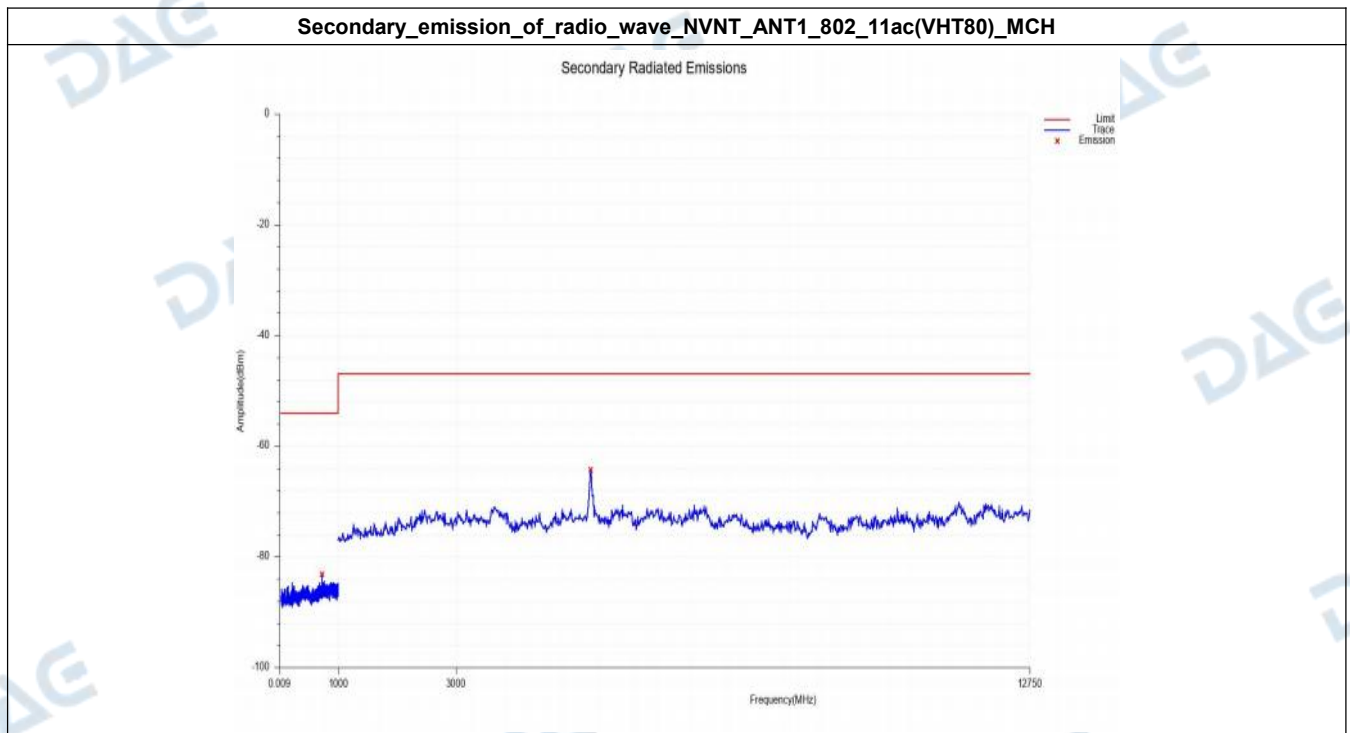

Appendix-5.3g

HT260424005---URX-05--MIC-5.3GWIFI

MIC_5.3G_WIFI (Item_19-3) Test Data

1. Occupied Frequency Bandwidth

Condition	Antenna	Mode	Frequency(MHz)	Occupied Bandwidth(MHz)	Limit(MHz)	Result
NVNT	ANT1	802.11a	5260.00	17.11	20	Pass
NVNT	ANT1	802.11a	5300.00	17.30	20	Pass
NVNT	ANT1	802.11a	5320.00	17.21	20	Pass
NVNT	ANT1	802.11n(HT20)	5260.00	18.10	20	Pass
NVNT	ANT1	802.11n(HT20)	5300.00	18.24	20	Pass
NVNT	ANT1	802.11n(HT20)	5320.00	18.50	20	Pass
NVNT	ANT1	802.11ac(VHT20)	5260.00	18.13	20	Pass
NVNT	ANT1	802.11ac(VHT20)	5300.00	17.81	20	Pass
NVNT	ANT1	802.11ac(VHT20)	5320.00	17.83	20	Pass
NVNT	ANT1	802.11n(HT40)	5270.00	36.37	40	Pass
NVNT	ANT1	802.11n(HT40)	5310.00	36.38	40	Pass
NVNT	ANT1	802.11ac(VHT40)	5270.00	36.30	40	Pass
NVNT	ANT1	802.11ac(VHT40)	5310.00	36.55	40	Pass
NVNT	ANT1	802.11ac(VHT80)	5290.00	75.50	80	Pass


Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11a_5260



Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11a_5300



Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11a_5320

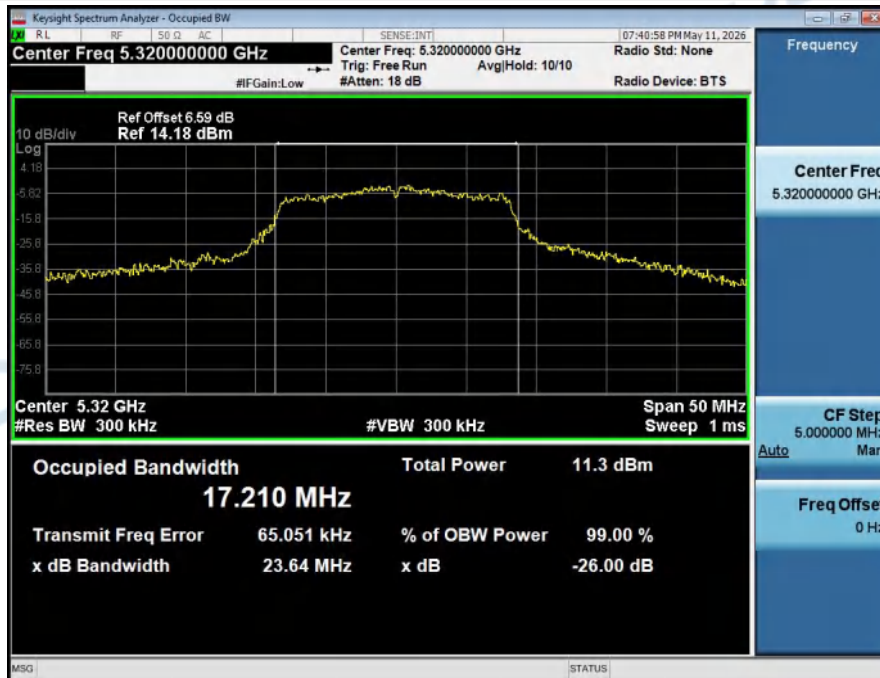

Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11n(HT20)_5260




Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11n(HT20)_5300




Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11n(HT20)_5320




Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11ac(VHT20)_5260

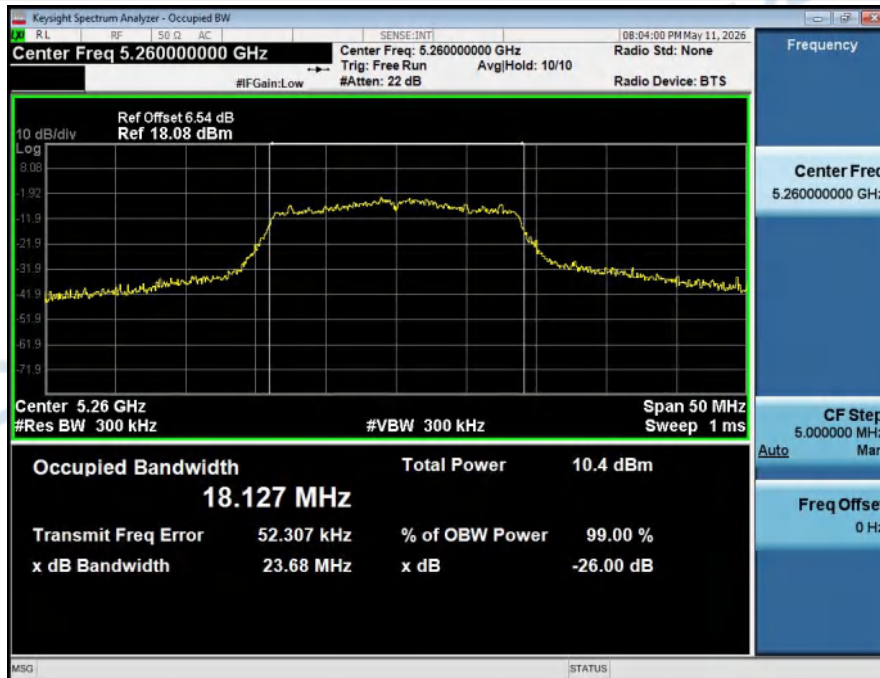


Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11ac(VHT20)_5300

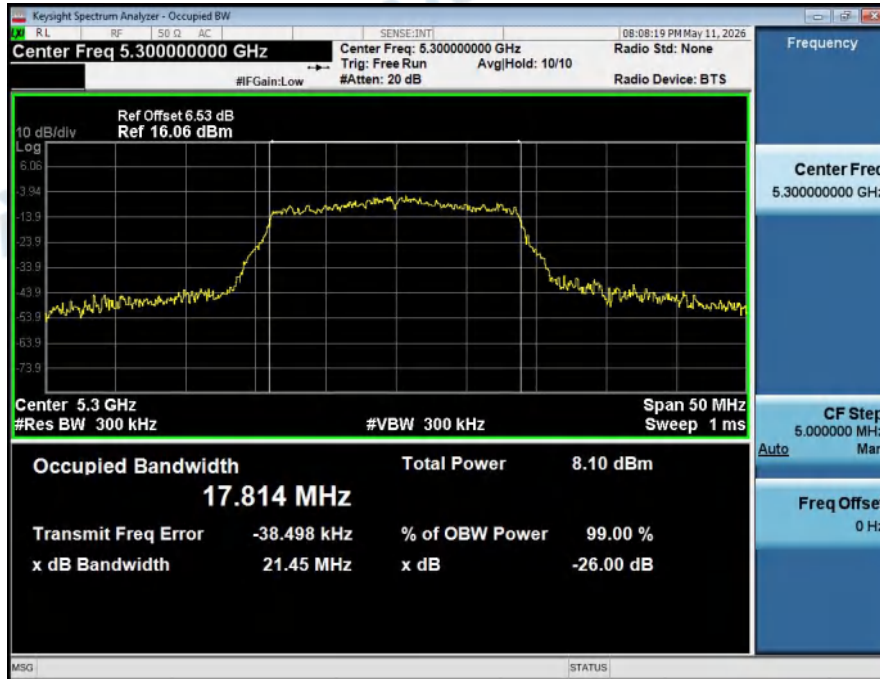

Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11ac(VHT20)_5320

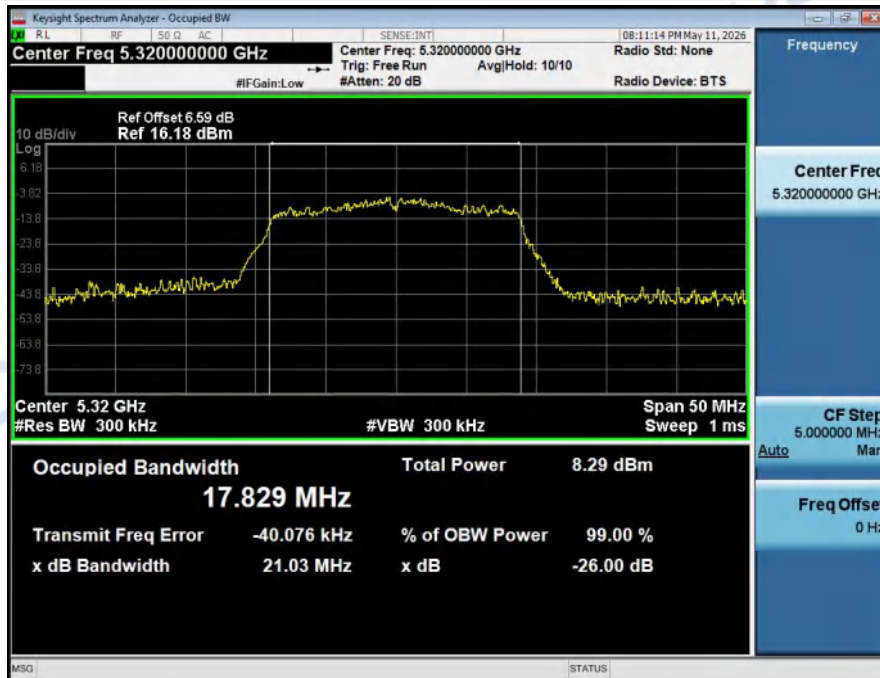


Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11n(HT40)_5270

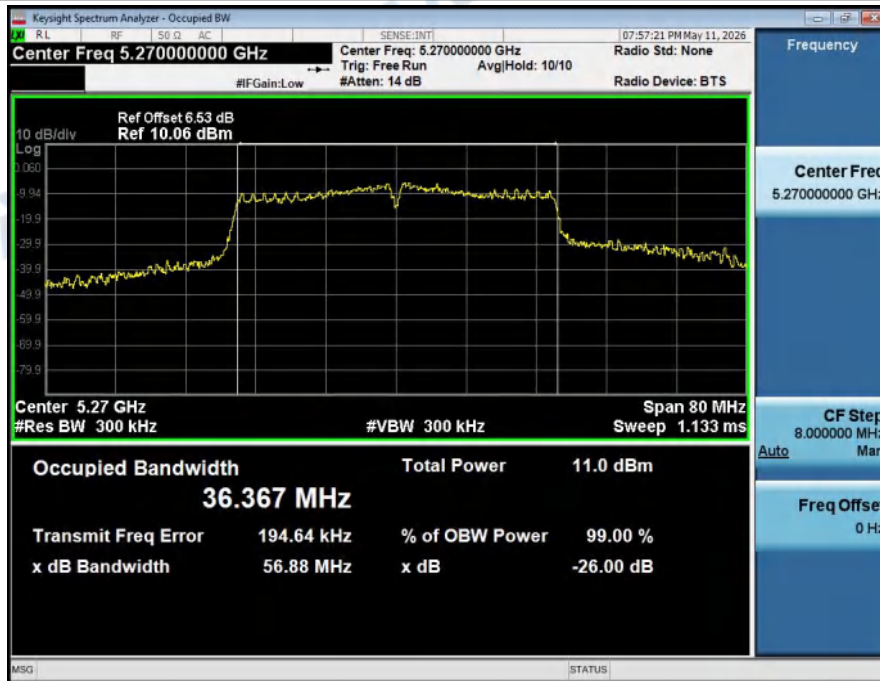

Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11n(HT40)_5310



Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11ac(VHT40)_5270

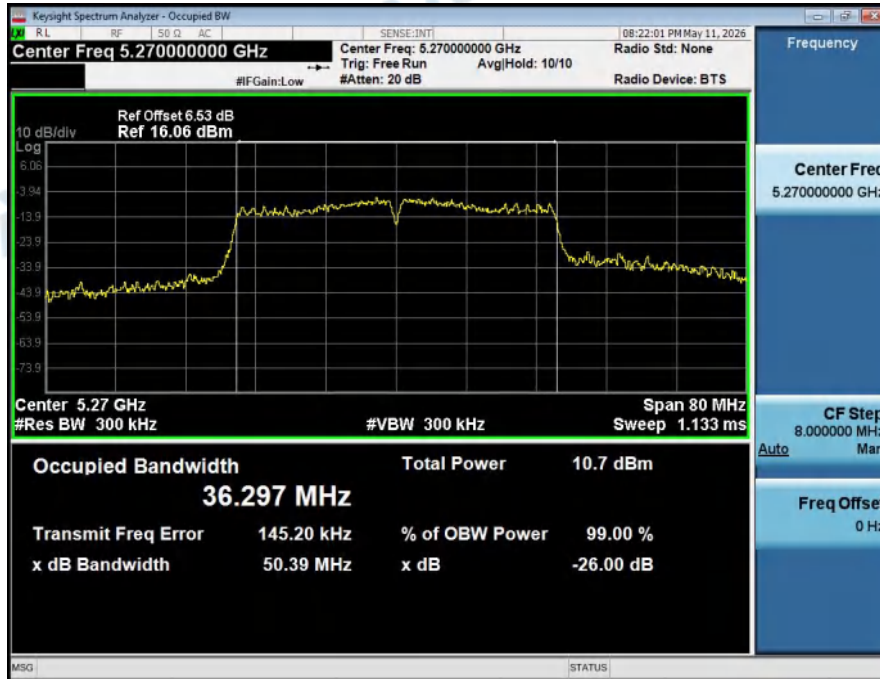

Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11ac(VHT40)_5310



Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11ac(VHT80)_5290




2. Spread Spectrum Bandwidth

Condition	Antenna	Mode	Frequency(MHz)	Spread Spectrum Bandwidth(MHz)
NVNT	ANT1	802.11a	5260.00	14.19
NVNT	ANT1	802.11a	5300.00	14.10
NVNT	ANT1	802.11a	5320.00	14.09
NVNT	ANT1	802.11n(HT20)	5260.00	15.10
NVNT	ANT1	802.11n(HT20)	5300.00	15.06
NVNT	ANT1	802.11n(HT20)	5320.00	15.13
NVNT	ANT1	802.11ac(VHT20)	5260.00	15.13
NVNT	ANT1	802.11ac(VHT20)	5300.00	15.11
NVNT	ANT1	802.11ac(VHT20)	5320.00	15.06
NVNT	ANT1	802.11n(HT40)	5270.00	31.40
NVNT	ANT1	802.11n(HT40)	5310.00	31.33
NVNT	ANT1	802.11ac(VHT40)	5270.00	31.43
NVNT	ANT1	802.11ac(VHT40)	5310.00	31.54
NVNT	ANT1	802.11ac(VHT80)	5290.00	64.29

Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11a_5260




Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11a_5300

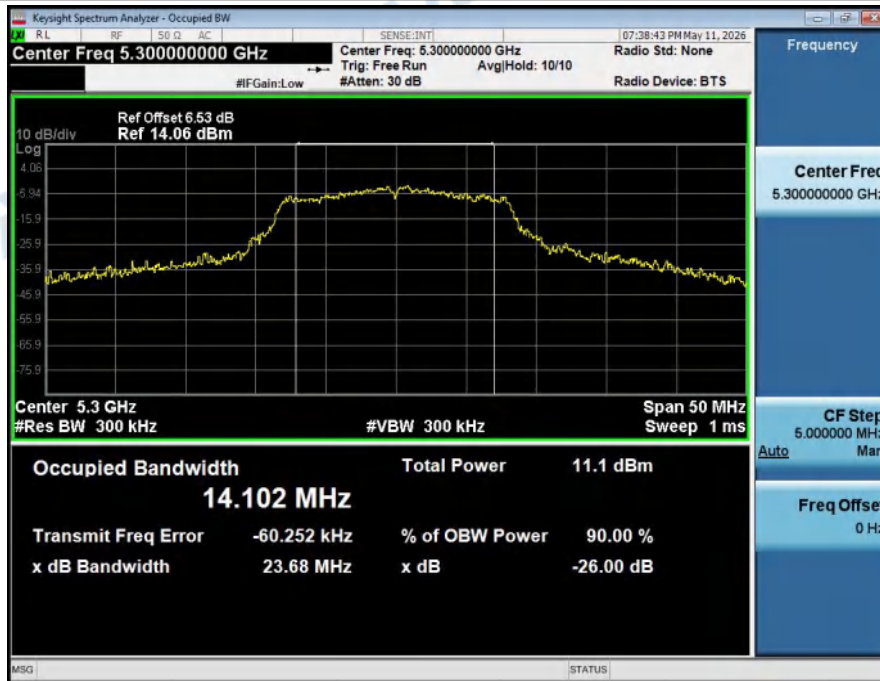

Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11a_5320




Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11n(HT20)_5260

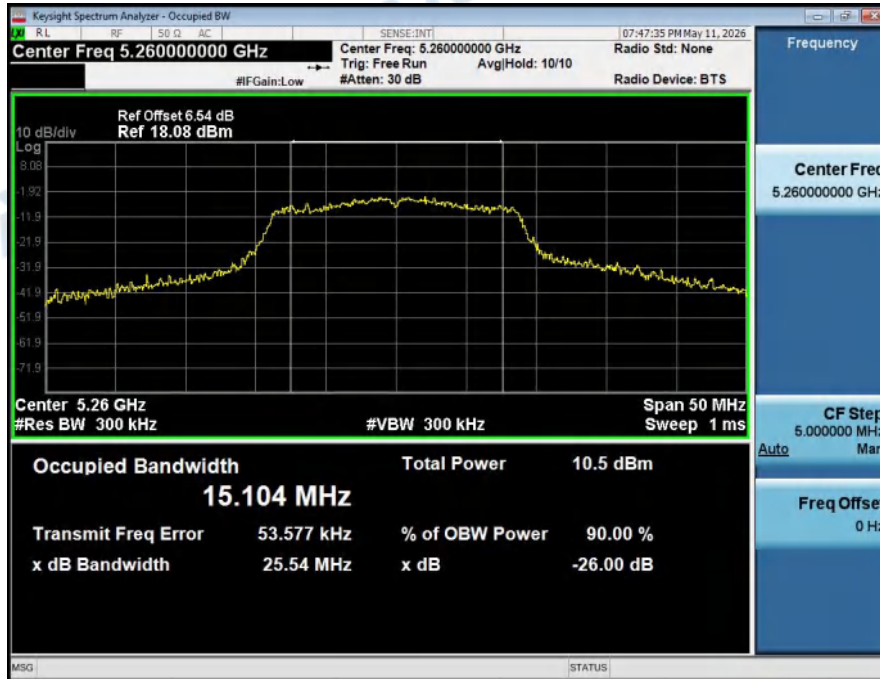


Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11n(HT20)_5300




Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11n(HT20)_5320

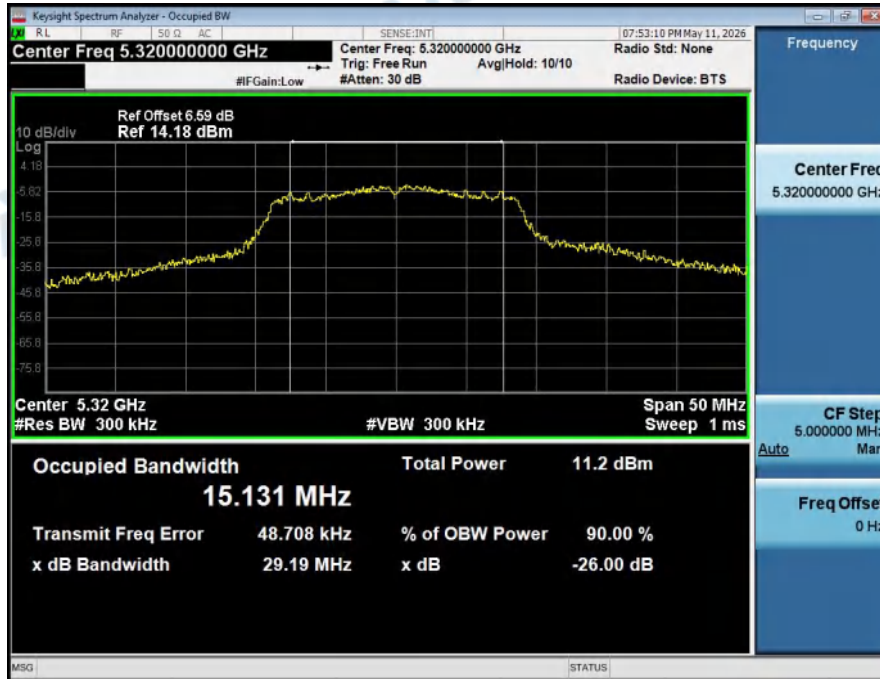

Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11ac(VHT20)_5260

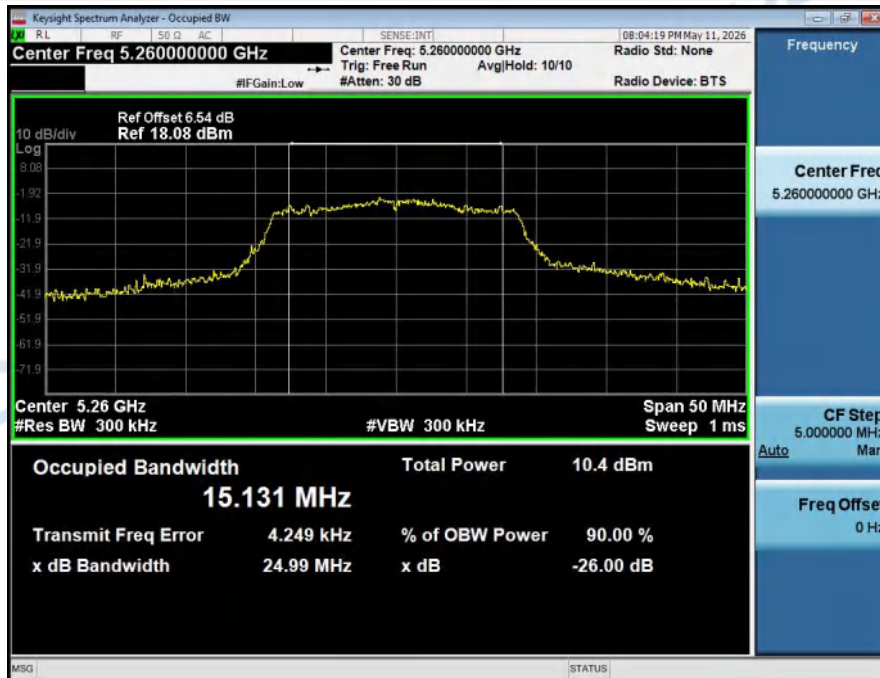


Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11ac(VHT20)_5300

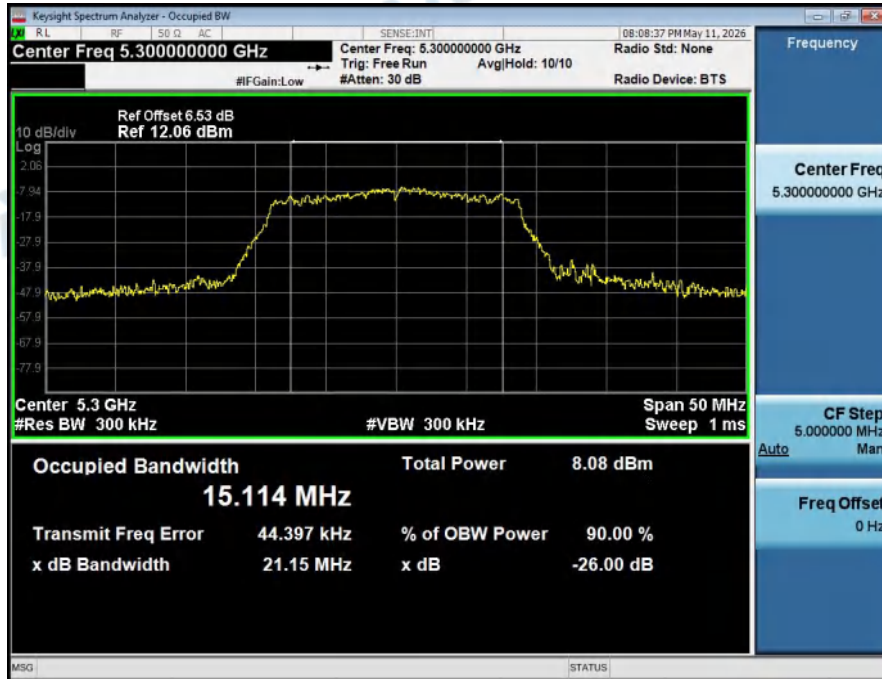

Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11ac(VHT20)_5320




Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11n(HT40)_5270

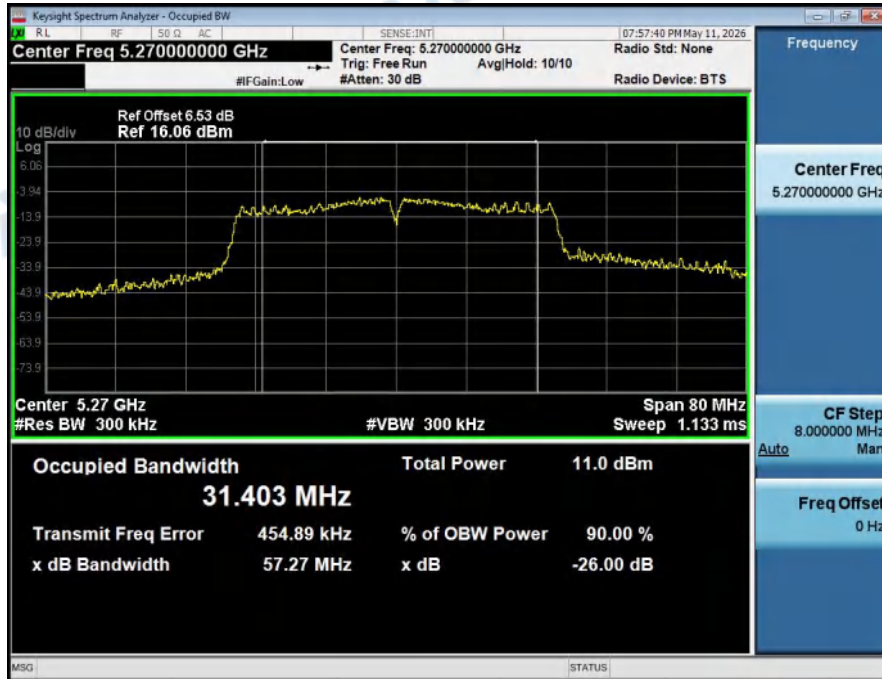

Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11n(HT40)_5310



Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11ac(VHT40)_5270

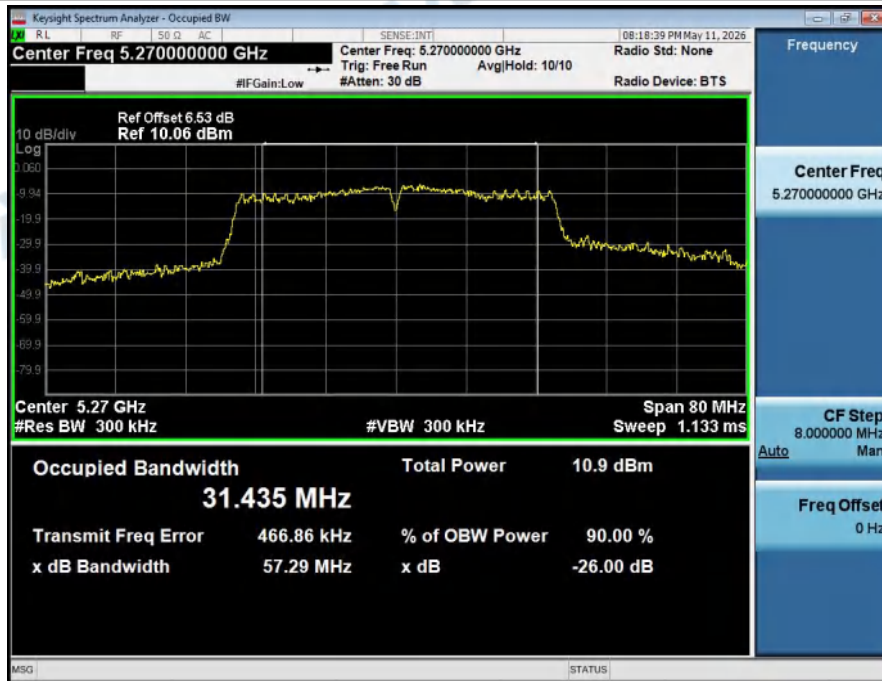

Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11ac(VHT40)_5310




Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11ac(VHT80)_5290




3. Burst Length

Condition	Antenna	Mode	Frequency	Burst_Length(ms)	Limit(ms)	Result
NVNT	ANT1	802.11a	5260.00	1.400	8	Pass
NVNT	ANT1	802.11a	5300.00	1.400	8	Pass
NVNT	ANT1	802.11a	5320.00	1.400	8	Pass
NVNT	ANT1	802.11n(HT20)	5260.00	1.310	8	Pass
NVNT	ANT1	802.11n(HT20)	5300.00	1.310	8	Pass
NVNT	ANT1	802.11n(HT20)	5320.00	1.310	8	Pass
NVNT	ANT1	802.11ac(VHT20)	5260.00	1.310	8	Pass
NVNT	ANT1	802.11ac(VHT20)	5300.00	0.170	8	Pass
NVNT	ANT1	802.11ac(VHT20)	5320.00	0.160	8	Pass
NVNT	ANT1	802.11n(HT40)	5270.00	0.650	8	Pass
NVNT	ANT1	802.11n(HT40)	5310.00	0.650	8	Pass
NVNT	ANT1	802.11ac(VHT40)	5270.00	0.650	8	Pass
NVNT	ANT1	802.11ac(VHT40)	5310.00	0.660	8	Pass
NVNT	ANT1	802.11ac(VHT80)	5290.00	0.310	8	Pass


Burst_Length_NVNT_ANT1_802_11a_5260_20M

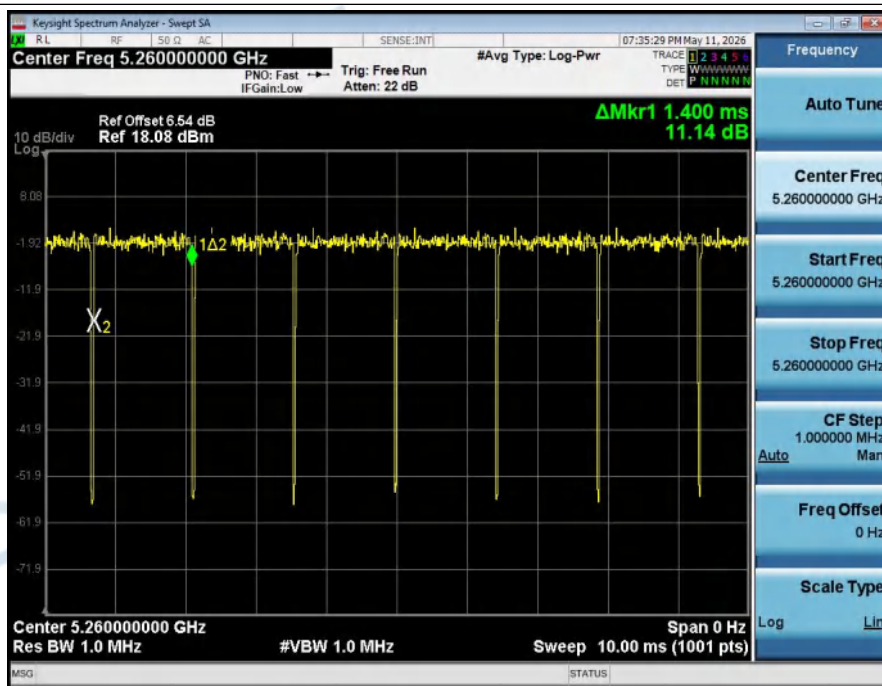


Burst_Length_NVNT_ANT1_802_11a_5300_20M

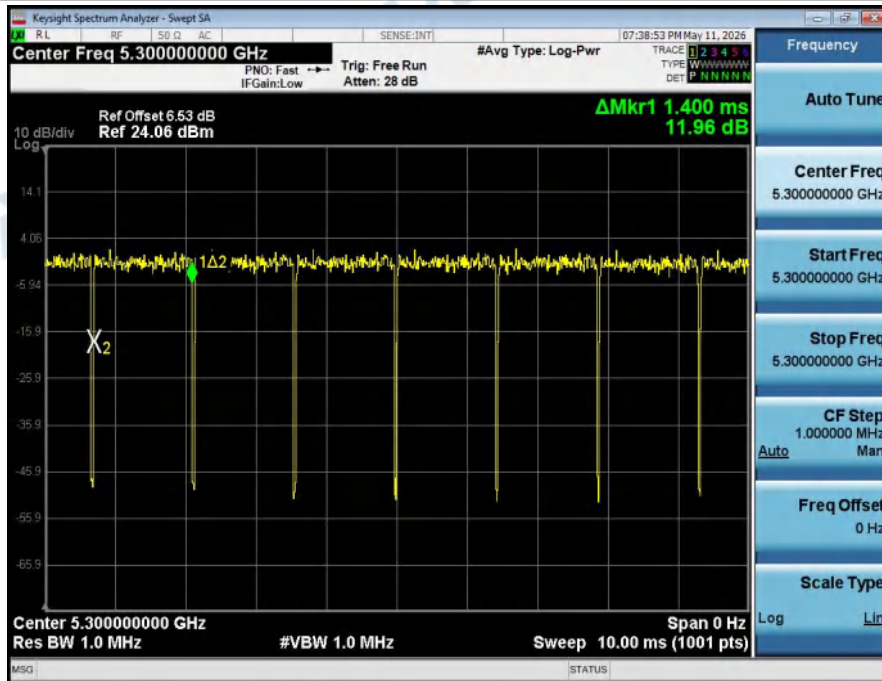


Burst_Length_NVNT_ANT1_802_11a_5320_20M

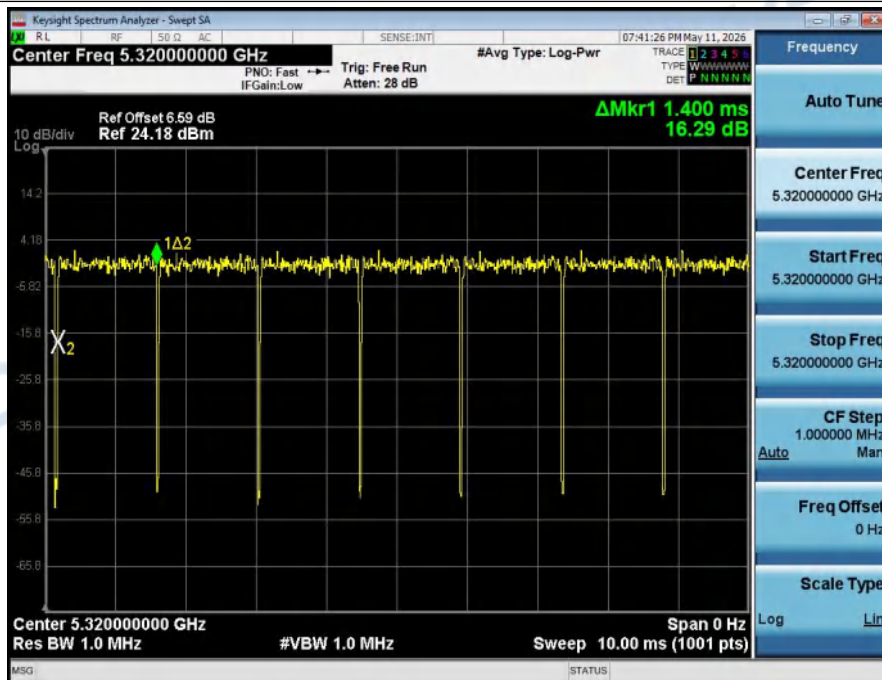


Burst_Length_NVNT_ANT1_802_11n(HT20)_5260_20M

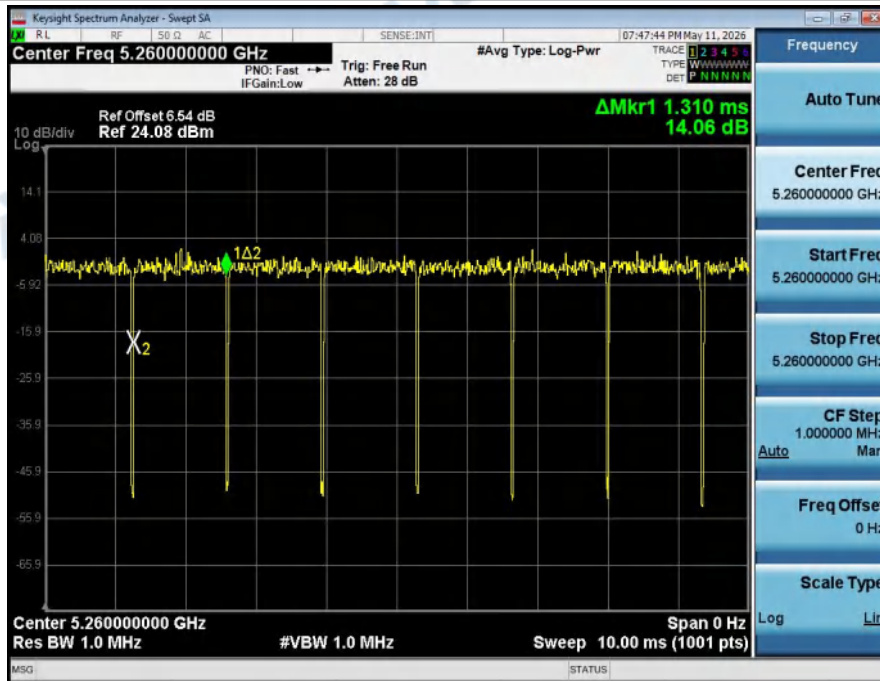


Burst_Length_NVNT_ANT1_802_11n(HT20)_5300_20M

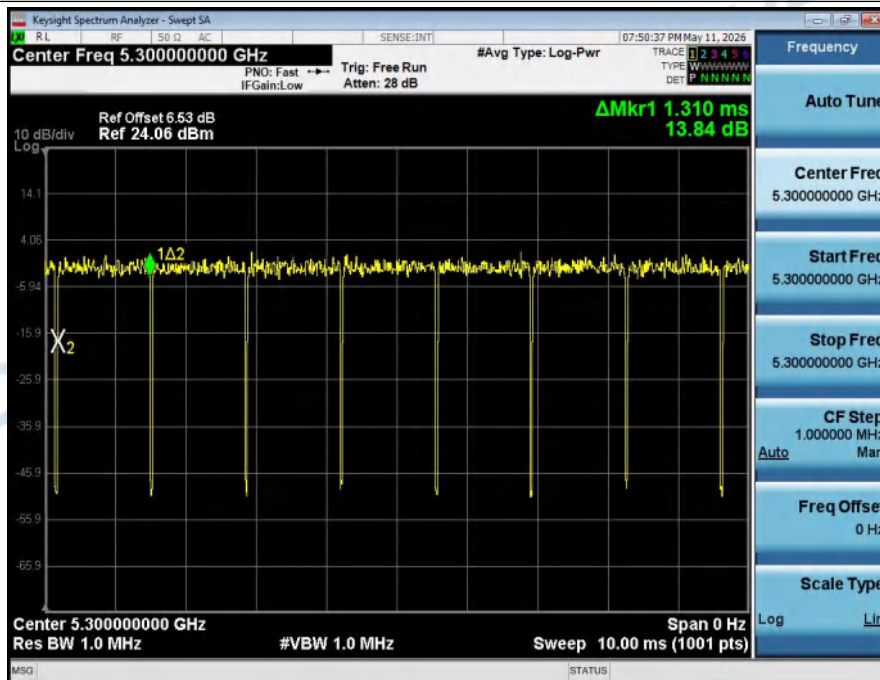


Burst_Length_NVNT_ANT1_802_11n(HT20)_5320_20M

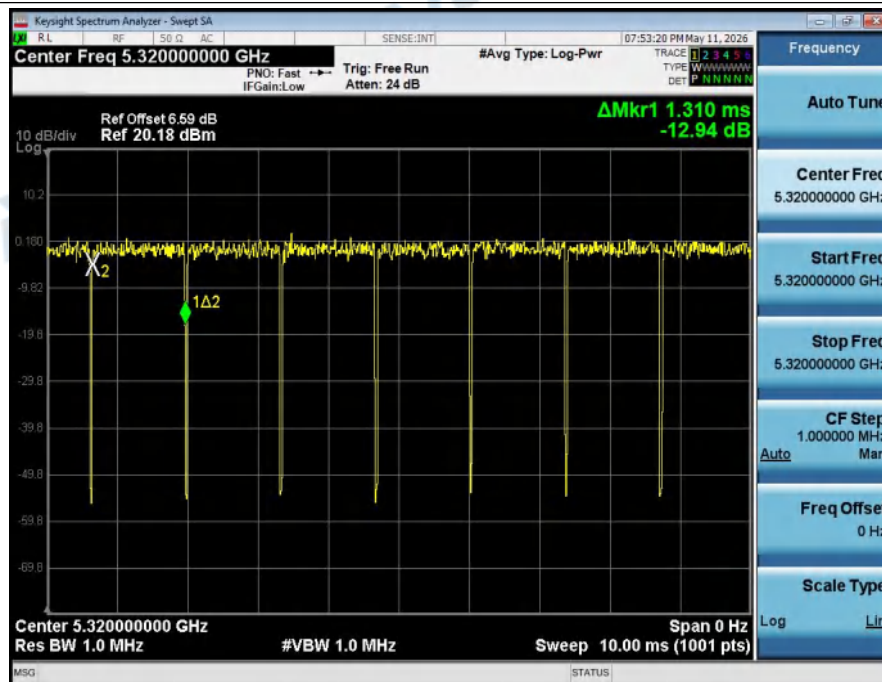


Burst_Length_NVNT_ANT1_802_11ac(VHT20)_5260_20M

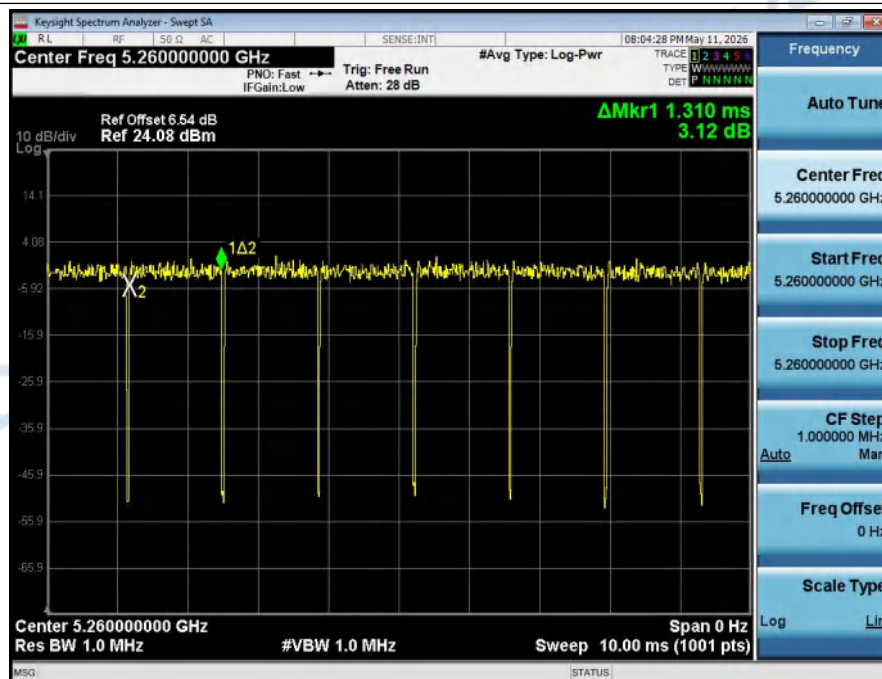


Burst_Length_NVNT_ANT1_802_11ac(VHT20)_5300_20M

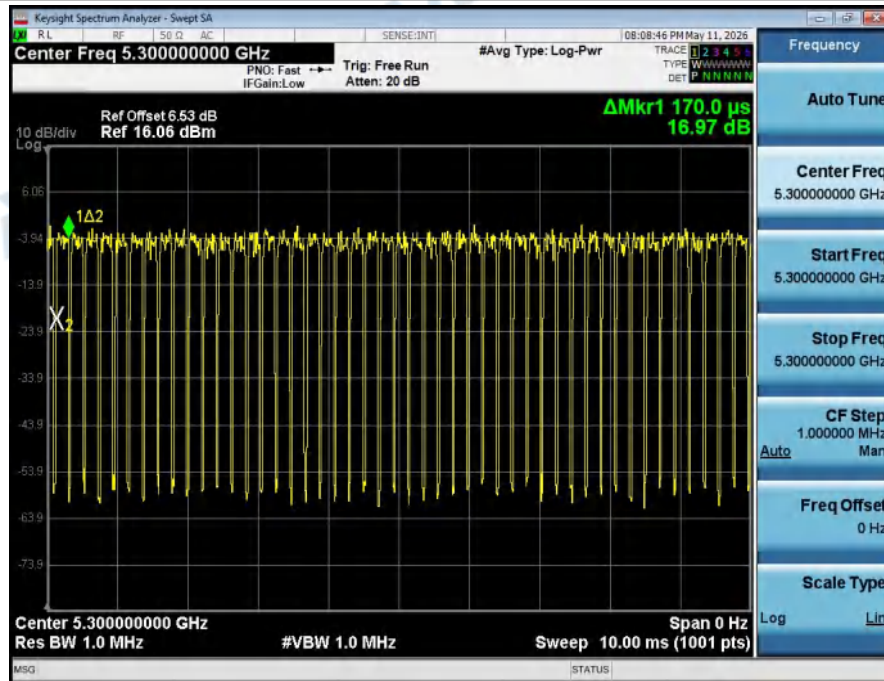


Burst_Length_NVNT_ANT1_802_11ac(VHT20)_5320_20M

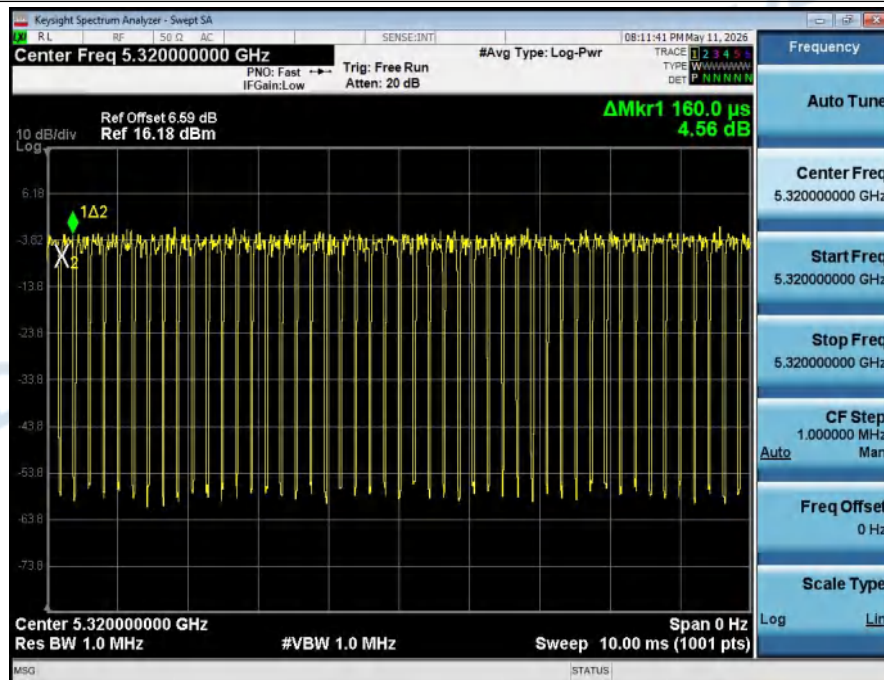


Burst_Length_NVNT_ANT1_802_11n(HT40)_5270_40M

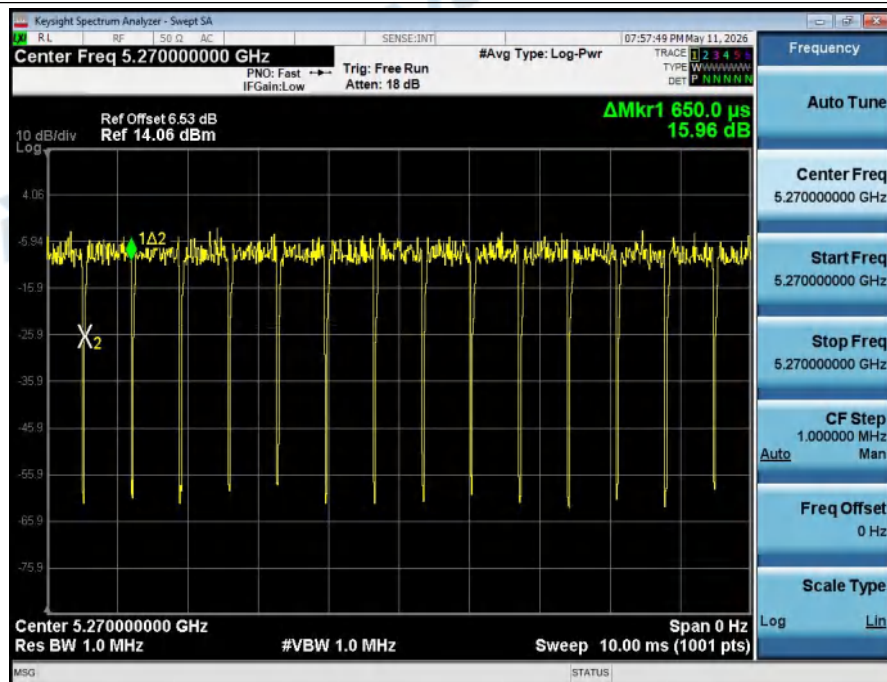


Burst_Length_NVNT_ANT1_802_11n(HT40)_5310_40M

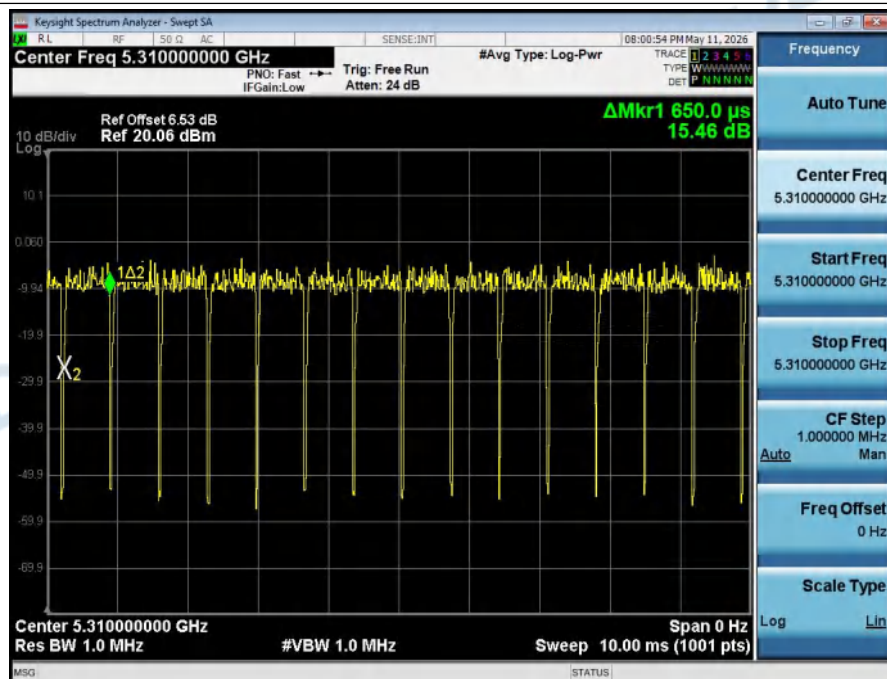

Burst_Length_NVNT_ANT1_802_11ac(VHT40)_5270_40M

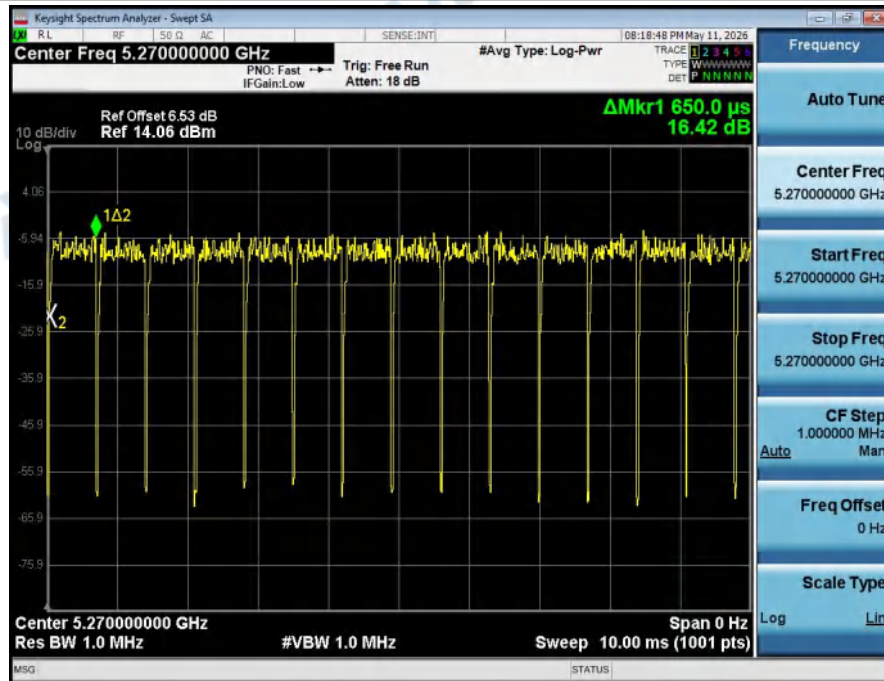

Burst_Length_NVNT_ANT1_802_11ac(VHT40)_5310_40M

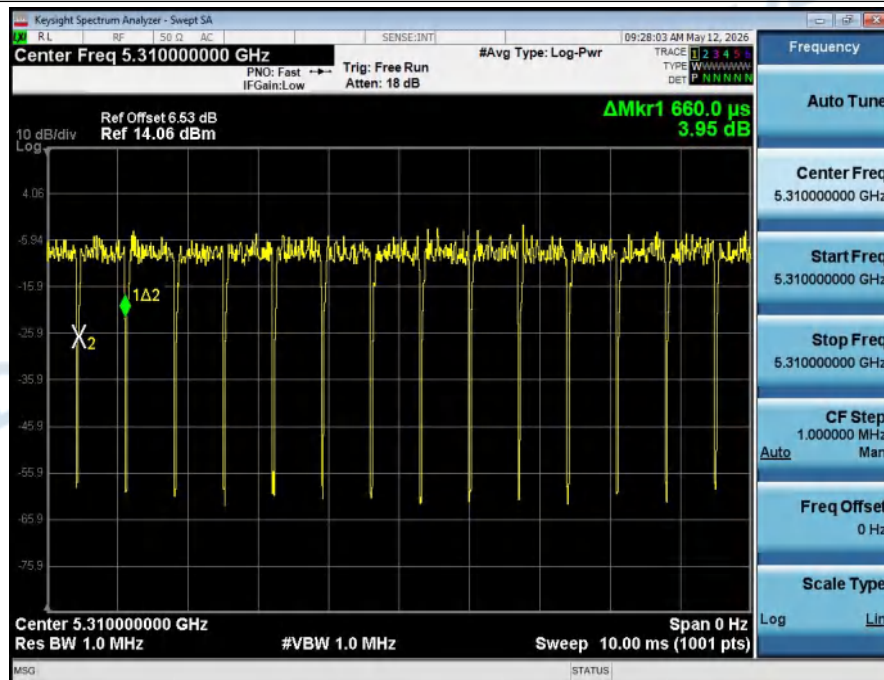

Burst_Length_NVNT_ANT1_802_11ac(VHT80)_5290_80M



4. RF output power & E.I.R.P(Without TPC)

Condition	Antenna	Mode	Frequency	Measured Power (dBm)	Antenna Power (mW/MHz)	Rated Power (mW/MHz)	Power Limit (mW/MHz)	Power Tolerance(%)	Tolerance Limit(%)	Result
NVNT	ANT1	802.11a	5260.00	-7.74	0.17	0.2	10.00	-15	-80~+20	Pass
NVNT	ANT1	802.11a	5300.00	-7.35	0.18	0.2	10.00	-10	-80~+20	Pass
NVNT	ANT1	802.11a	5320.00	-7.07	0.20	0.2	10.00	0	-80~+20	Pass
NVNT	ANT1	802.11n(HT20)	5260.00	-7.81	0.17	0.2	10.00	-15	-80~+20	Pass
NVNT	ANT1	802.11n(HT20)	5300.00	-7.85	0.16	0.2	10.00	-20	-80~+20	Pass
NVNT	ANT1	802.11n(HT20)	5320.00	-7.52	0.18	0.2	10.00	-10	-80~+20	Pass
NVNT	ANT1	802.11ac(VHT20)	5260.00	-8.03	0.16	0.2	10.00	-20	-80~+20	Pass
NVNT	ANT1	802.11ac(VHT20)	5300.00	-8.92	0.13	0.2	10.00	-35	-80~+20	Pass
NVNT	ANT1	802.11ac(VHT20)	5320.00	-8.56	0.14	0.2	10.00	-30	-80~+20	Pass
NVNT	ANT1	802.11n(HT40)	5270.00	-10.82	0.08	0.1	5.00	-20	-80~+20	Pass
NVNT	ANT1	802.11n(HT40)	5310.00	-10.81	0.08	0.1	5.00	-20	-80~+20	Pass
NVNT	ANT1	802.11ac(VHT40)	5270.00	-10.51	0.09	0.1	5.00	-10	-80~+20	Pass
NVNT	ANT1	802.11ac(VHT40)	5310.00	-10.52	0.09	0.1	5.00	-10	-80~+20	Pass
NVNT	ANT1	802.11ac(VHT80)	5290.00	-12.50	0.06	0.1	2.50	-40	-80~+20	Pass

Condition	Antenna	Mode	Frequency	Measured Power(dBm/MHz)	Antenna Gain(dBi)	EIRP(mW/MHz)	EIRP Limit(mW/MHz)	Result
NVNT	ANT1	802.11a	5260.00	-7.74	2.05	-5.69	10.00	Pass
NVNT	ANT1	802.11a	5300.00	-7.35	2.05	-5.3	10.00	Pass
NVNT	ANT1	802.11a	5320.00	-7.07	2.05	-5.02	10.00	Pass
NVNT	ANT1	802.11n(HT20)	5260.00	-7.81	2.05	-5.76	10.00	Pass
NVNT	ANT1	802.11n(HT20)	5300.00	-7.85	2.05	-5.8	10.00	Pass
NVNT	ANT1	802.11n(HT20)	5320.00	-7.52	2.05	-5.47	10.00	Pass
NVNT	ANT1	802.11ac(VHT20)	5260.00	-8.03	2.05	-5.98	10.00	Pass
NVNT	ANT1	802.11ac(VHT20)	5300.00	-8.92	2.05	-6.87	10.00	Pass
NVNT	ANT1	802.11ac(VHT20)	5320.00	-8.56	2.05	-6.51	10.00	Pass
NVNT	ANT1	802.11n(HT40)	5270.00	-10.82	2.05	-8.77	5.00	Pass
NVNT	ANT1	802.11n(HT40)	5310.00	-10.81	2.05	-8.76	5.00	Pass
NVNT	ANT1	802.11ac(VHT40)	5270.00	-10.51	2.05	-8.46	5.00	Pass
NVNT	ANT1	802.11ac(VHT40)	5310.00	-10.52	2.05	-8.47	5.00	Pass
NVNT	ANT1	802.11ac(VHT80)	5290.00	-12.50	2.05	-10.45	2.50	Pass

5. Spurious Emissions

Condition	Mode	TX Freq. (MHz)	Freq Range (MHz)	Spur. Freq. (MHz)	Amplitude (dBm/MHz)	Gain (dBi)	EIRP (dBm/MHz)	Limit (dBm/MHz)	Spur. Level	Limit	Result
NVNT	802.11a	5260	5140.0~5233.3	5231.148	-33.65	2.05	-31.6	-26	0.4318μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5260	5233.3~5240.0	5237.2	-28.66	2.05	-26.61	-21.36	1.362810μW/MHz	0.007311mW/MHz	Pass
NVNT	802.11a	5260	5240.0~5249.0	5248.967	-20.66	2.05	-18.61	-10.03	0.008584mW/MHz	0.099337mW/MHz	Pass
NVNT	802.11a	5260	5249.0~5249.8	5249.53	-16.75	2.05	-14.7	-4.7	0.021152mW/MHz	0.338844mW/MHz	Pass
NVNT	802.11a	5260	5249.8~5250.0	5249.98	-17.41	2.05	-15.36	2.8	0.018165mW/MHz	1.905461mW/MHz	Pass
NVNT	802.11a	5260	5350.0~5360.0	5359.15	-48.13	2.05	-46.08	-26	0.0153μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5260	30.0~5140.0	3173.541	-45.33	2.05	-43.28	-26	0.0292μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5260	5360.0~10000.0	5735.831	-45.53	2.05	-43.48	-26	0.0279μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5260	10000.0~26000.0	25028.8	-45.18	2.05	-43.13	-26	0.0303μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5300	5140.0~5233.3	5171.972	-48.17	2.05	-46.12	-26	0.0152μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5300	5233.3~5240.0	5238.505	-48.07	2.05	-46.02	-19.79	0.015596μW/MHz	0.010486mW/MHz	Pass
NVNT	802.11a	5300	5240.0~5249.0	5247.685	-45.36	2.05	-43.31	-11.17	0.000029mW/MHz	0.076403mW/MHz	Pass
NVNT	802.11a	5300	5249.0~5249.8	5249.485	-46.34	2.05	-44.29	-5.15	0.000023mW/MHz	0.305492mW/MHz	Pass
NVNT	802.11a	5300	5249.8~5250.0	5249.913	-47.44	2.05	-45.39	1	0.000018mW/MHz	1.258925mW/MHz	Pass
NVNT	802.11a	5300	5350.0~5360.0	5352.805	-43.57	2.05	-41.52	-26	0.0439μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5300	30.0~5140.0	1752.816	-44.34	2.05	-42.29	-26	0.0367μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5300	5360.0~10000.0	7263.235	-45.2	2.05	-43.15	-26	0.0301μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5300	10000.0~26000.0	25086.4	-46.16	2.05	-44.11	-26	0.0242μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5320	5140.0~5233.3	5150.125	-47.7	2.05	-45.65	-26	0.0169μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5320	5233.3~5240.0	5234.86	-49.13	2.05	-47.08	-24.17	0.012225μW/MHz	0.003830mW/MHz	Pass
NVNT	802.11a	5320	5240.0~5249.0	5241.925	-47.92	2.05	-45.87	-16.29	0.000016mW/MHz	0.023502mW/MHz	Pass
NVNT	802.11a	5320	5249.0~5249.8	5249.62	-49.36	2.05	-47.31	-3.8	0.000012mW/MHz	0.416869mW/MHz	Pass
NVNT	802.11a	5320	5249.8~5250.0	5249.913	-50.45	2.05	-48.4	1	0.000009mW/MHz	1.258925mW/MHz	Pass
NVNT	802.11a	5320	5350.0~5360.0	5351.18	-35.1	2.05	-33.05	-26	0.3088μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5320	30.0~5140.0	2433.767	-42.1	2.05	-40.05	-26	0.0616μW/MHz	2.5μW/MHz	Pass

NVNT	802.11a	5320	5360.0~10000.0	5360.959	-38.73	2.05	-36.68	-26	0.1338μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5320	10000.0~26000.0	25049.6	-46.48	2.05	-44.43	-26	0.0225μW/MHz	2.5μW/MHz	Pass
NVNT	802.11n(HT20)	5260	5140.0~5233.3	5233.217	-38.96	2.05	-36.91	-26	0.1270μW/MHz	2.5μW/MHz	Pass
NVNT	802.11n(HT20)	5260	5233.3~5240.0	5238.1	-32.55	2.05	-30.5	-20.28	0.556408μW/MHz	0.009376mW/MHz	Pass
NVNT	802.11n(HT20)	5260	5240.0~5249.0	5248.833	-21.29	2.05	-19.24	-10.15	0.007438mW/MHz	0.096630mW/MHz	Pass
NVNT	802.11n(HT20)	5260	5249.0~5249.8	5249.755	-15.26	2.05	-13.21	-2.45	0.029752mW/MHz	0.568853mW/MHz	Pass
NVNT	802.11n(HT20)	5260	5249.8~5250.0	5249.98	-13.88	2.05	-11.83	2.8	0.040918mW/MHz	1.905461mW/MHz	Pass
NVNT	802.11n(HT20)	5260	5350.0~5360.0	5355.302	-47.05	2.05	-45	-26	0.0197μW/MHz	2.5μW/MHz	Pass
NVNT	802.11n(HT20)	5260	30.0~5140.0	2654.104	-45.86	2.05	-43.81	-26	0.0259μW/MHz	2.5μW/MHz	Pass
NVNT	802.11n(HT20)	5260	5360.0~10000.0	5848.492	-45.61	2.05	-43.56	-26	0.0274μW/MHz	2.5μW/MHz	Pass
NVNT	802.11n(HT20)	5260	10000.0~26000.0	25004.8	-46.96	2.05	-44.91	-26	0.0201μW/MHz	2.5μW/MHz	Pass
NVNT	802.11n(HT20)	5300	5140.0~5233.3	5210.358	-47.86	2.05	-45.81	-26	0.0163μW/MHz	2.5μW/MHz	Pass
NVNT	802.11n(HT20)	5300	5233.3~5240.0	5237.74	-47.34	2.05	-45.29	-20.71	0.018429μW/MHz	0.008488mW/MHz	Pass
NVNT	802.11n(HT20)	5300	5240.0~5249.0	5246.898	-46.28	2.05	-44.23	-11.87	0.000024mW/MHz	0.065030mW/MHz	Pass
NVNT	802.11n(HT20)	5300	5249.0~5249.8	5249.035	-46.32	2.05	-44.27	-9.65	0.000023mW/MHz	0.108393mW/MHz	Pass
NVNT	802.11n(HT20)	5300	5249.8~5250.0	5249.935	-49.74	2.05	-47.69	1.6	0.000011mW/MHz	1.445440mW/MHz	Pass
NVNT	802.11n(HT20)	5300	5350.0~5360.0	5351.703	-43.33	2.05	-41.28	-26	0.0464μW/MHz	2.5μW/MHz	Pass
NVNT	802.11n(HT20)	5300	30.0~5140.0	3156.592	-45.08	2.05	-43.03	-26	0.0310μW/MHz	2.5μW/MHz	Pass
NVNT	802.11n(HT20)	5300	5360.0~10000.0	5672.023	-44.98	2.05	-42.93	-26	0.0317μW/MHz	2.5μW/MHz	Pass
NVNT	802.11n(HT20)	5300	10000.0~26000.0	25051.2	-47.03	2.05	-44.98	-26	0.0198μW/MHz	2.5μW/MHz	Pass
NVNT	802.11n(HT20)	5320	5140.0~5233.3	5192.065	-47.48	2.05	-45.43	-26	0.0178μW/MHz	2.5μW/MHz	Pass
NVNT	802.11n(HT20)	5320	5233.3~5240.0	5237.988	-47.38	2.05	-45.33	-20.41	0.018289μW/MHz	0.009089mW/MHz	Pass
NVNT	802.11n(HT20)	5320	5240.0~5249.0	5243.882	-48.67	2.05	-46.62	-14.55	0.000014mW/MHz	0.035084mW/MHz	Pass
NVNT	802.11n(HT20)	5320	5249.0~5249.8	5249.417	-49.43	2.05	-47.38	-5.83	0.000011mW/MHz	0.261517mW/MHz	Pass
NVNT	802.11n(HT20)	5320	5249.8~5250.0	5249.958	-51.22	2.05	-49.17	2.2	0.000008mW/MHz	1.659587mW/MHz	Pass
NVNT	802.11n(HT20)	5320	5350.0~5360.0	5352.467	-30.32	2.05	-28.27	-26	0.9298μW/MHz	2.5μW/MHz	Pass
NVNT	802.11n(HT20)	5320	30.0~5140.0	3726.876	-44.84	2.05	-42.79	-26	0.0327μW/MHz	2.5μW/MHz	Pass
NVNT	802.11n(HT20)	5320	5360.0~10000.0	5362.953	-37.39	2.05	-35.34	-26	0.1822μW/MHz	2.5μW/MHz	Pass


NVNT	802.11n(HT20)	5320	10000.0~26000.0	25027.2	-46.23	2.05	-44.18	-26	0.0238μW/MHz	2.5μW/MHz	Pass
NVNT	802.11ac(VHT20)	5260	5140.0~5233.3	5233.24	-34.4	2.05	-32.35	-26	0.3630μW/MHz	2.5μW/MHz	Pass
NVNT	802.11ac(VHT20)	5260	5233.3~5240.0	5238.347	-31.56	2.05	-29.51	-19.98	0.698638μW/MHz	0.010039mW/MHz	Pass
NVNT	802.11ac(VHT20)	5260	5240.0~5249.0	5248.743	-20.76	2.05	-18.71	-10.23	0.008403mW/MHz	0.094866mW/MHz	Pass
NVNT	802.11ac(VHT20)	5260	5249.0~5249.8	5249.71	-16.48	2.05	-14.43	-2.9	0.022512mW/MHz	0.512861mW/MHz	Pass
NVNT	802.11ac(VHT20)	5260	5249.8~5250.0	5249.98	-13.86	2.05	-11.81	2.8	0.041113mW/MHz	1.905461mW/MHz	Pass
NVNT	802.11ac(VHT20)	5260	5350.0~5360.0	5351.905	-46.95	2.05	-44.9	-26	0.0201μW/MHz	2.5μW/MHz	Pass
NVNT	802.11ac(VHT20)	5260	30.0~5140.0	3647.116	-44.7	2.05	-42.65	-26	0.0338μW/MHz	2.5μW/MHz	Pass
NVNT	802.11ac(VHT20)	5260	5360.0~10000.0	5873.417	-45.2	2.05	-43.15	-26	0.0301μW/MHz	2.5μW/MHz	Pass
NVNT	802.11ac(VHT20)	5260	10000.0~26000.0	25048	-45.62	2.05	-43.57	-26	0.0274μW/MHz	2.5μW/MHz	Pass
NVNT	802.11ac(VHT20)	5300	5140.0~5233.3	5169.542	-47.92	2.05	-45.87	-26	0.0161μW/MHz	2.5μW/MHz	Pass
NVNT	802.11ac(VHT20)	5300	5233.3~5240.0	5239.99	-48.3	2.05	-46.25	-18.01	0.014775μW/MHz	0.015805mW/MHz	Pass
NVNT	802.11ac(VHT20)	5300	5240.0~5249.0	5245.75	-47.92	2.05	-45.87	-12.89	0.000016mW/MHz	0.051418mW/MHz	Pass
NVNT	802.11ac(VHT20)	5300	5249.0~5249.8	5249.328	-49.41	2.05	-47.36	-6.72	0.000011mW/MHz	0.212569mW/MHz	Pass
NVNT	802.11ac(VHT20)	5300	5249.8~5250.0	5249.868	-48.7	2.05	-46.65	-0.2	0.000013mW/MHz	0.954993mW/MHz	Pass
NVNT	802.11ac(VHT20)	5300	5350.0~5360.0	5350.217	-47.71	2.05	-45.66	-26	0.0169μW/MHz	2.5μW/MHz	Pass
NVNT	802.11ac(VHT20)	5300	30.0~5140.0	825.606	-40.51	2.05	-38.46	-26	0.0889μW/MHz	2.5μW/MHz	Pass
NVNT	802.11ac(VHT20)	5300	5360.0~10000.0	5823.567	-44.9	2.05	-42.85	-26	0.0323μW/MHz	2.5μW/MHz	Pass
NVNT	802.11ac(VHT20)	5300	10000.0~26000.0	25030.4	-47.06	2.05	-45.01	-26	0.0196μW/MHz	2.5μW/MHz	Pass
NVNT	802.11ac(VHT20)	5320	5140.0~5233.3	5201.155	-48	2.05	-45.95	-26	0.0158μW/MHz	2.5μW/MHz	Pass
NVNT	802.11ac(VHT20)	5320	5233.3~5240.0	5234.163	-48.46	2.05	-46.41	-25	0.014253μW/MHz	0.003159mW/MHz	Pass
NVNT	802.11ac(VHT20)	5320	5240.0~5249.0	5243.882	-47.78	2.05	-45.73	-14.55	0.000017mW/MHz	0.035084mW/MHz	Pass
NVNT	802.11ac(VHT20)	5320	5249.0~5249.8	5249.373	-48.71	2.05	-46.66	-6.27	0.000013mW/MHz	0.235776mW/MHz	Pass
NVNT	802.11ac(VHT20)	5320	5249.8~5250.0	5249.89	-49.46	2.05	-47.41	0.4	0.000011mW/MHz	1.096478mW/MHz	Pass
NVNT	802.11ac(VHT20)	5320	5350.0~5360.0	5350.443	-36.06	2.05	-34.01	-26	0.2478μW/MHz	2.5μW/MHz	Pass
NVNT	802.11ac(VHT20)	5320	30.0~5140.0	4850.495	-45.74	2.05	-43.69	-26	0.0266μW/MHz	2.5μW/MHz	Pass
NVNT	802.11ac(VHT20)	5320	5360.0~10000.0	5362.953	-41.79	2.05	-39.74	-26	0.0662μW/MHz	2.5μW/MHz	Pass
NVNT	802.11ac(VHT20)	5320	10000.0~26000.0	24958.4	-47.01	2.05	-44.96	-26	0.0198μW/MHz	2.5μW/MHz	Pass

NVNT	802.11n(HT40)	5270	5100.0~5221.6	5220.75	-41.79	2.05	-39.74	-26	0.0661μW/MHz	2.5μW/MHz	Pass
NVNT	802.11n(HT40)	5270	5221.6~5230.0	5228.25	-36.27	2.05	-34.22	-22.06	0.000236mW/MHz	0.006223mW/MHz	Pass
NVNT	802.11n(HT40)	5270	5230.0~5249.0	5243.64	-29.96	2.05	-27.91	-15.27	0.001009mW/MHz	0.029736mW/MHz	Pass
NVNT	802.11n(HT40)	5270	5249.0~5250.0	5249.97	-27.67	2.05	-25.62	-3.31	0.001711mW/MHz	0.466627mW/MHz	Pass
NVNT	802.11n(HT40)	5270	5350.0~5358.4	5350.71	-42.75	2.05	-40.7	-18	0.0531μW/MHz	15μW/MHz	Pass
NVNT	802.11n(HT40)	5270	5358.4~5400.0	5365.08	-42.73	2.05	-40.68	-26	0.0532μW/MHz	2.5μW/MHz	Pass
NVNT	802.11n(HT40)	5270	30.0~5100.0	3645.122	-45.07	2.05	-43.02	-26	0.0310μW/MHz	2.5μW/MHz	Pass
NVNT	802.11n(HT40)	5270	5400.0~10000.0	6401.827	-45.7	2.05	-43.65	-26	0.0268μW/MHz	2.5μW/MHz	Pass
NVNT	802.11n(HT40)	5270	10000.0~26000.0	25102.4	-46.62	2.05	-44.57	-26	0.0217μW/MHz	2.5μW/MHz	Pass
NVNT	802.11n(HT40)	5310	5100.0~5221.6	5217.42	-46.32	2.05	-44.27	-26	0.0233μW/MHz	2.5μW/MHz	Pass
NVNT	802.11n(HT40)	5310	5221.6~5230.0	5226.81	-43.93	2.05	-41.88	-22.92	0.000040mW/MHz	0.005100mW/MHz	Pass
NVNT	802.11n(HT40)	5310	5230.0~5249.0	5247.9	-41.06	2.05	-39.01	-13.47	0.000078mW/MHz	0.044942mW/MHz	Pass
NVNT	802.11n(HT40)	5310	5249.0~5250.0	5249.46	-42.95	2.05	-40.9	-8.41	0.000051mW/MHz	0.144202mW/MHz	Pass
NVNT	802.11n(HT40)	5310	5350.0~5358.4	5351.52	-27.29	2.05	-25.24	-18	1.8656μW/MHz	15μW/MHz	Pass
NVNT	802.11n(HT40)	5310	5358.4~5400.0	5358.45	-31.05	2.05	-29	-26	0.7852μW/MHz	2.5μW/MHz	Pass
NVNT	802.11n(HT40)	5310	30.0~5100.0	1746.834	-40.88	2.05	-38.83	-26	0.0817μW/MHz	2.5μW/MHz	Pass
NVNT	802.11n(HT40)	5310	5400.0~10000.0	5400.839	-40.59	2.05	-38.54	-26	0.0872μW/MHz	2.5μW/MHz	Pass
NVNT	802.11n(HT40)	5310	10000.0~26000.0	24987.2	-46.66	2.05	-44.61	-26	0.0215μW/MHz	2.5μW/MHz	Pass
NVNT	802.11ac(VHT40)	5270	5100.0~5221.6	5219.79	-38.71	2.05	-36.66	-26	0.1345μW/MHz	2.5μW/MHz	Pass
NVNT	802.11ac(VHT40)	5270	5221.6~5230.0	5228.4	-35.76	2.05	-33.71	-21.97	0.000265mW/MHz	0.006353mW/MHz	Pass
NVNT	802.11ac(VHT40)	5270	5230.0~5249.0	5248.65	-28.13	2.05	-26.08	-13.16	0.001538mW/MHz	0.048332mW/MHz	Pass
NVNT	802.11ac(VHT40)	5270	5249.0~5250.0	5249.52	-25.08	2.05	-23.03	-7.81	0.003103mW/MHz	0.165566mW/MHz	Pass
NVNT	802.11ac(VHT40)	5270	5350.0~5358.4	5355.78	-40	2.05	-37.95	-18	0.0999μW/MHz	15μW/MHz	Pass
NVNT	802.11ac(VHT40)	5270	5358.4~5400.0	5359.95	-42.05	2.05	-40	-26	0.0624μW/MHz	2.5μW/MHz	Pass
NVNT	802.11ac(VHT40)	5270	30.0~5100.0	2678.032	-44.73	2.05	-42.68	-26	0.0336μW/MHz	2.5μW/MHz	Pass
NVNT	802.11ac(VHT40)	5270	5400.0~10000.0	5825.561	-45.05	2.05	-43	-26	0.0312μW/MHz	2.5μW/MHz	Pass
NVNT	802.11ac(VHT40)	5270	10000.0~26000.0	25009.6	-45.92	2.05	-43.87	-26	0.0255μW/MHz	2.5μW/MHz	Pass
NVNT	802.11ac(VHT40)	5310	5100.0~5221.6	5218.86	-44.26	2.05	-42.21	-26	0.0374μW/MHz	2.5μW/MHz	Pass

NVNT	802.11ac(VH T40)	531 0	5221.6~5230 .0	5229.3 9	-43.96	2.0 5	-41.91	-21.38	0.000040mW/ MHz	0.007284mW/ MHz	Pass
NVNT	802.11ac(VH T40)	531 0	5230.0~5249 .0	5245.0 2	-40.74	2.0 5	-38.69	-14.69	0.000084mW/ MHz	0.033993mW/ MHz	Pass
NVNT	802.11ac(VH T40)	531 0	5249.0~5250 .0	5249.3 1	-40.62	2.0 5	-38.57	-9.91	0.000087mW/ MHz	0.102087mW/ MHz	Pass
NVNT	802.11ac(VH T40)	531 0	5350.0~5358 .4	5350.9 2	-29.58	2.0 5	-27.53	-18	1.1025μW/M Hz	15μW/MHz	Pass
NVNT	802.11ac(VH T40)	531 0	5358.4~5400 .0	5359.9 8	-30.65	2.0 5	-28.6	-26	0.8613μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(VH T40)	531 0	30.0~5100.0	1753.8 13	-38.6	2.0 5	-36.55	-26	0.1380μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(VH T40)	531 0	5400.0~1000 0.0	5400.8 39	-41.72	2.0 5	-39.67	-26	0.0673μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(VH T40)	531 0	10000.0~260 00.0	25016	-47.02	2.0 5	-44.97	-26	0.0198μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(VH T80)	529 0	5100.0~5203 .3	5197.2 42	-39.92	2.0 5	-37.87	-26	0.1017μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(VH T80)	529 0	5203.3~5210 .0	5209.0 98	-40.62	2.0 5	-38.57	-24.29	0.000087mW/ MHz	0.003723mW/ MHz	Pass
NVNT	802.11ac(VH T80)	529 0	5210.0~5249 .0	5248.9 98	-32.73	2.0 5	-30.68	-16.02	0.000534mW/ MHz	0.024998mW/ MHz	Pass
NVNT	802.11ac(VH T80)	529 0	5249.0~5250 .0	5249.9 86	-30.04	2.0 5	-27.99	-6.16	0.000991mW/ MHz	0.242069mW/ MHz	Pass
NVNT	802.11ac(VH T80)	529 0	5350.0~5376 .8	5350.2 3	-29.59	2.0 5	-27.54	-18	1.1001μW/M Hz	15μW/MHz	Pass
NVNT	802.11ac(VH T80)	529 0	5376.8~5480 .0	5381.0 1	-33.29	2.0 5	-31.24	-26	0.4691μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(VH T80)	529 0	30.0~5100.0	2676.0 38	-45.57	2.0 5	-43.52	-26	0.0277μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(VH T80)	529 0	5480.0~1000 0.0	5857.4 65	-44.58	2.0 5	-42.53	-26	0.0348μW/M Hz	2.5μW/MHz	Pass
NVNT	802.11ac(VH T80)	529 0	10000.0~260 00.0	25009. 6	-46.61	2.0 5	-44.56	-26	0.0218μW/M Hz	2.5μW/MHz	Pass


In_band_NVNT_ANT1_802_11a_5260

In band Spurious Emission

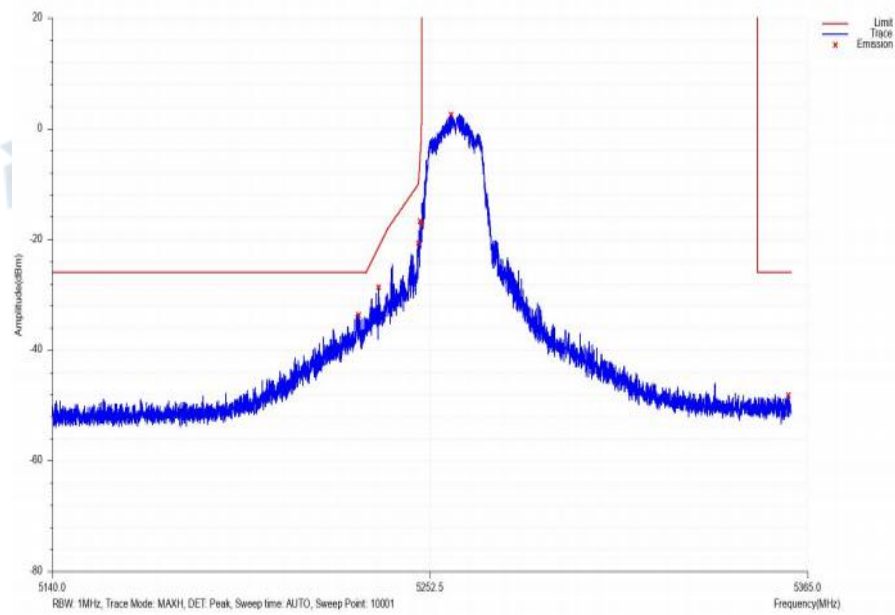


Out_of_band_NVNT_ANT1_802_11a_5260

In band Spurious Emission

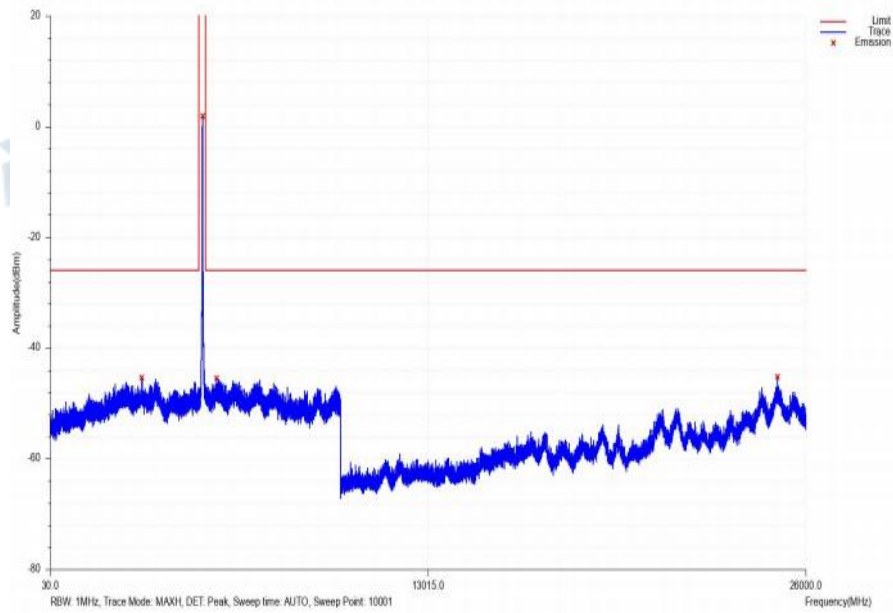


In_band_NVNT_ANT1_802_11a_5300


In band Spurious Emission

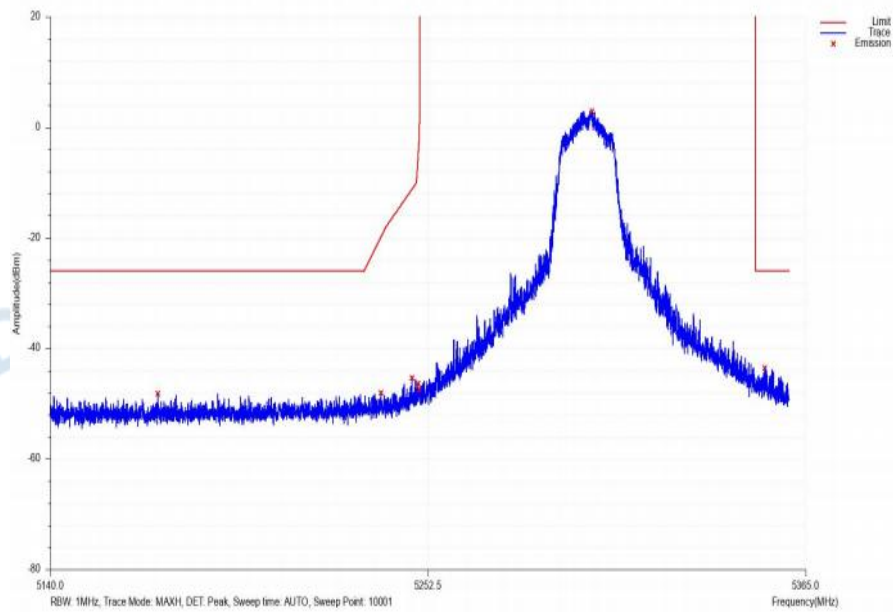


Out_of_band_NVNT_ANT1_802_11a_5300

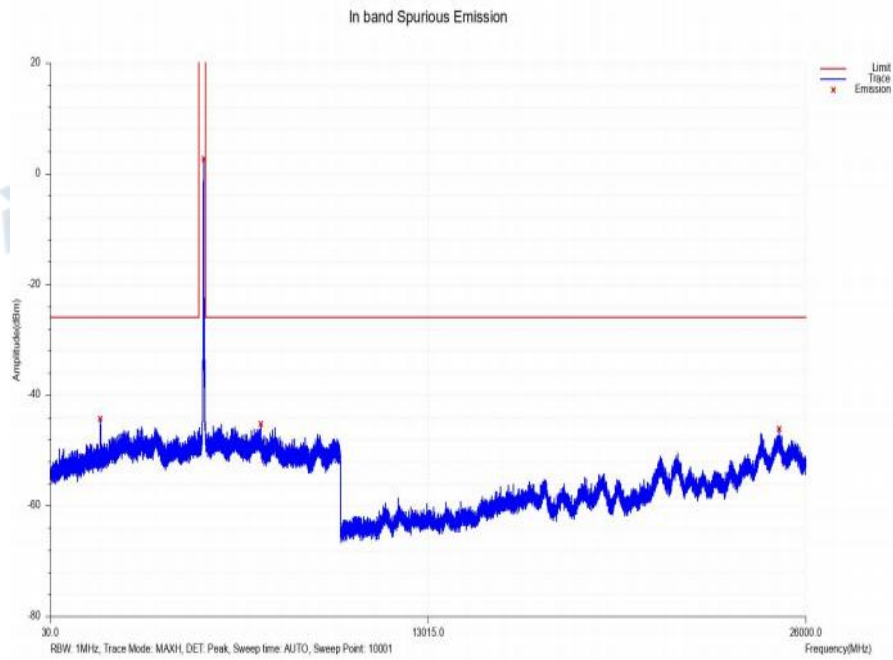


In_band_NVNT_ANT1_802_11a_5320

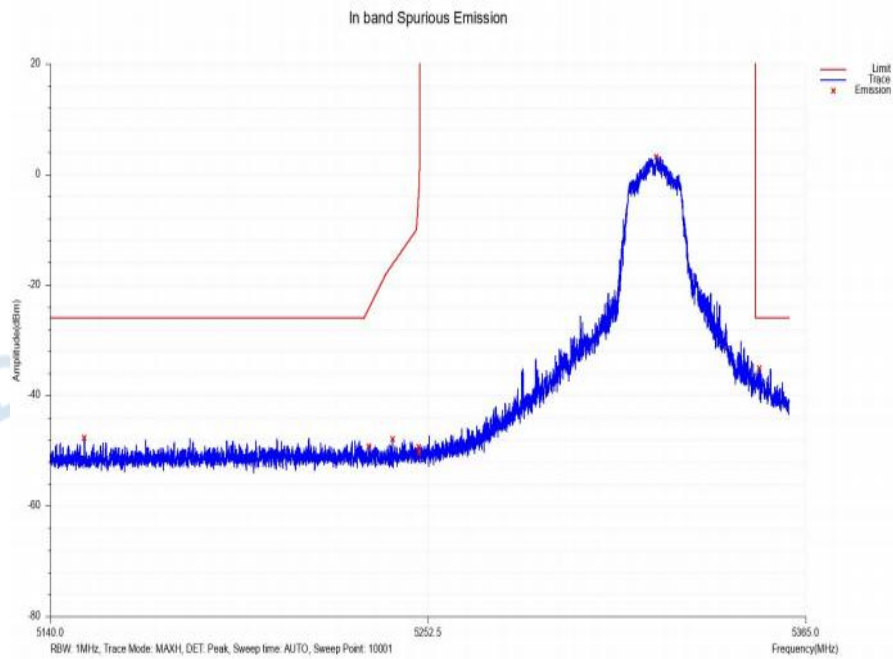


Out_of_band_NVNT_ANT1_802_11a_5320

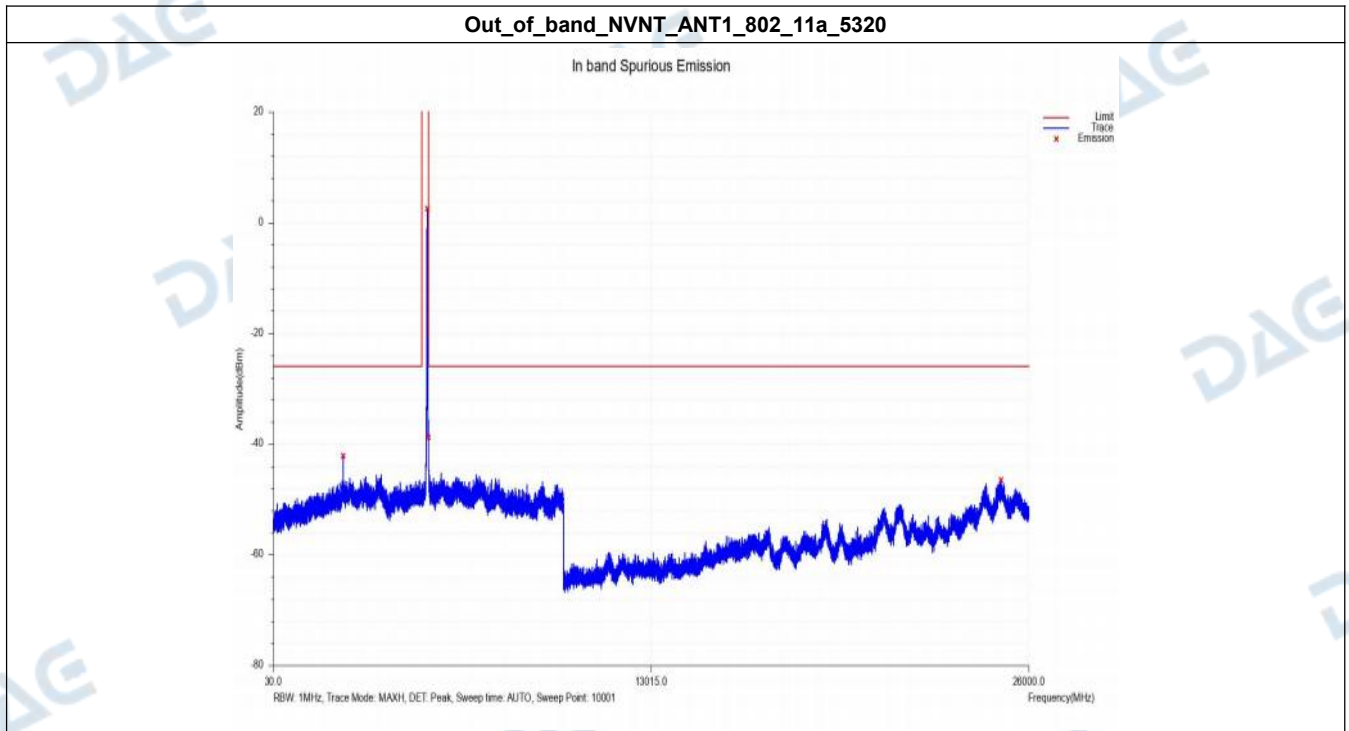


In_band_NVNT_ANT1_802_11n(HT20)_5260

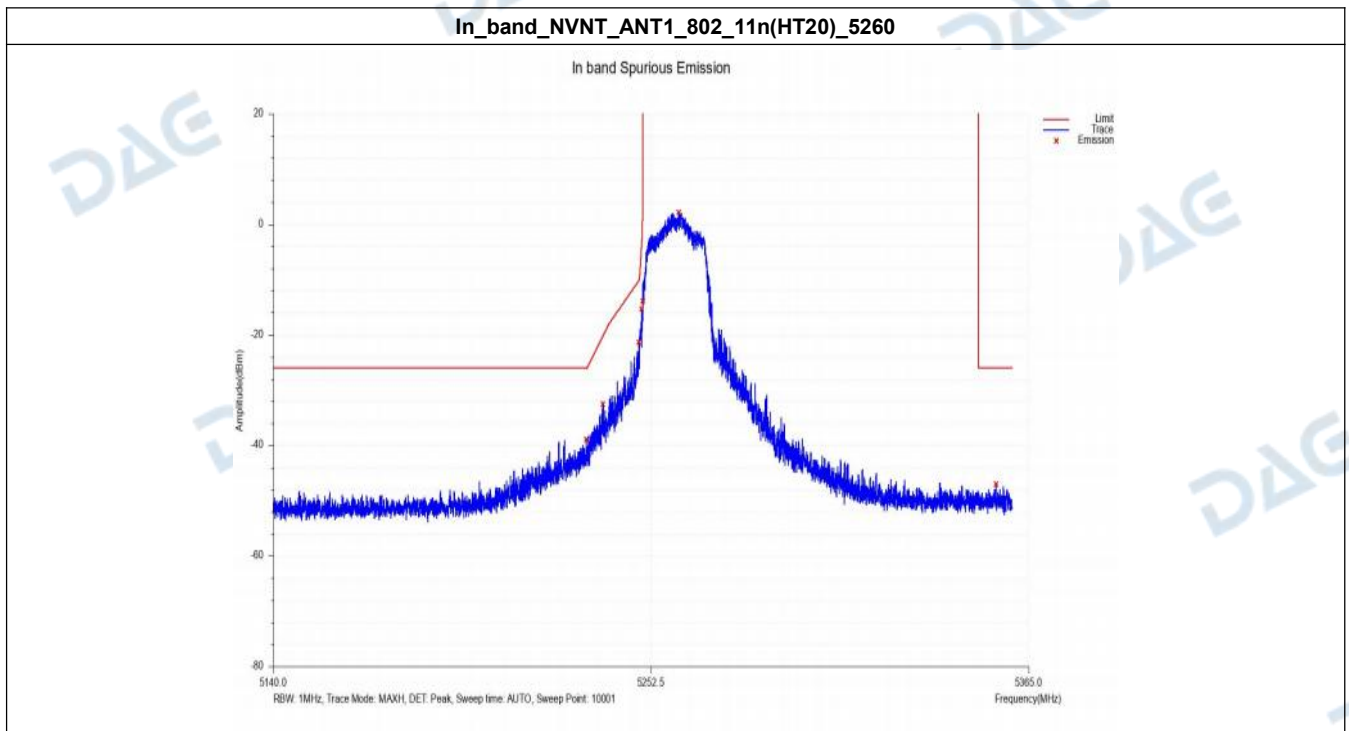


Out_of_band_NVNT_ANT1_802_11n(HT20)_5260

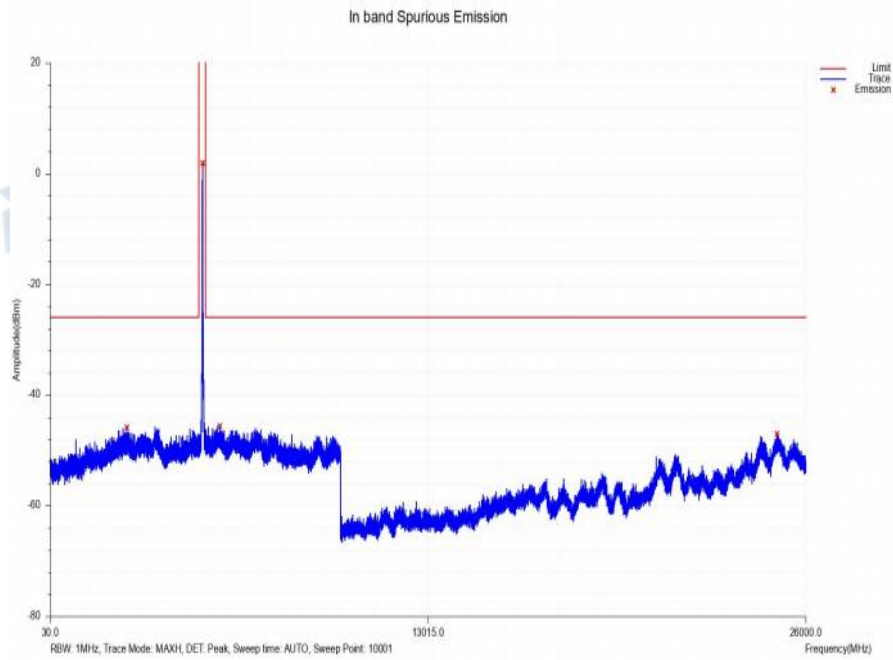


In_band_NVNT_ANT1_802_11n(HT20)_5300

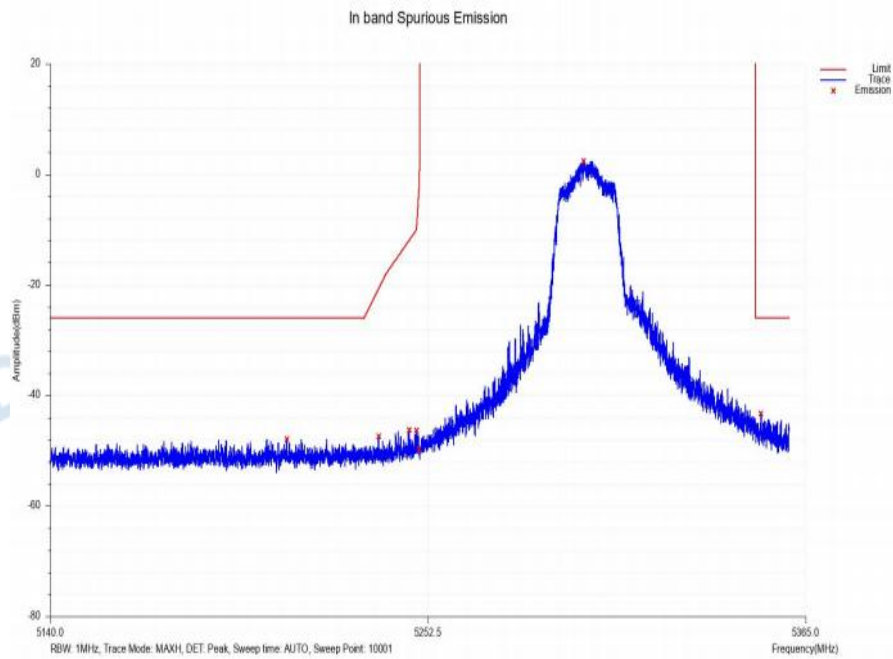


Out_of_band_NVNT_ANT1_802_11n(HT20)_5300

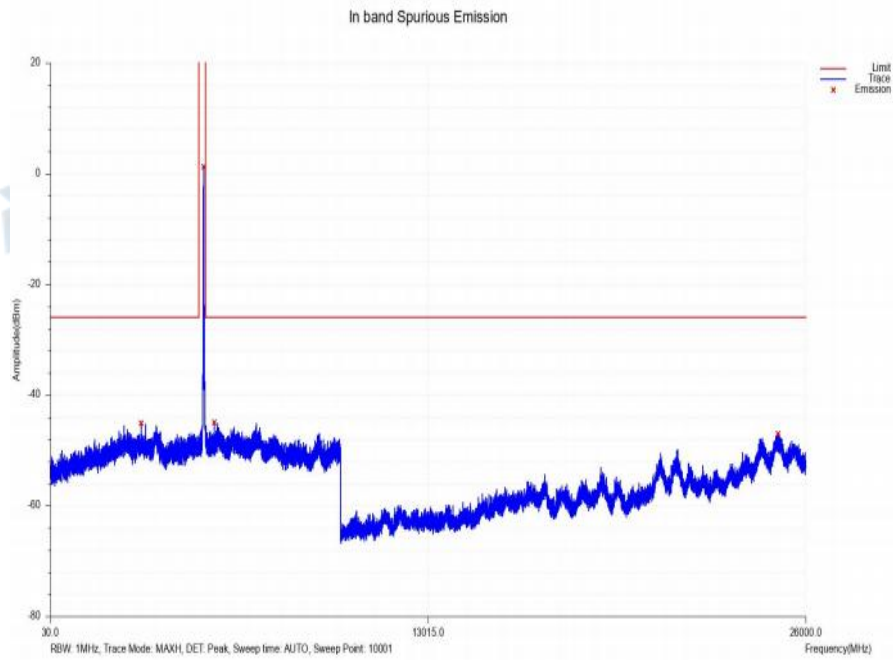


In_band_NVNT_ANT1_802_11n(HT20)_5320

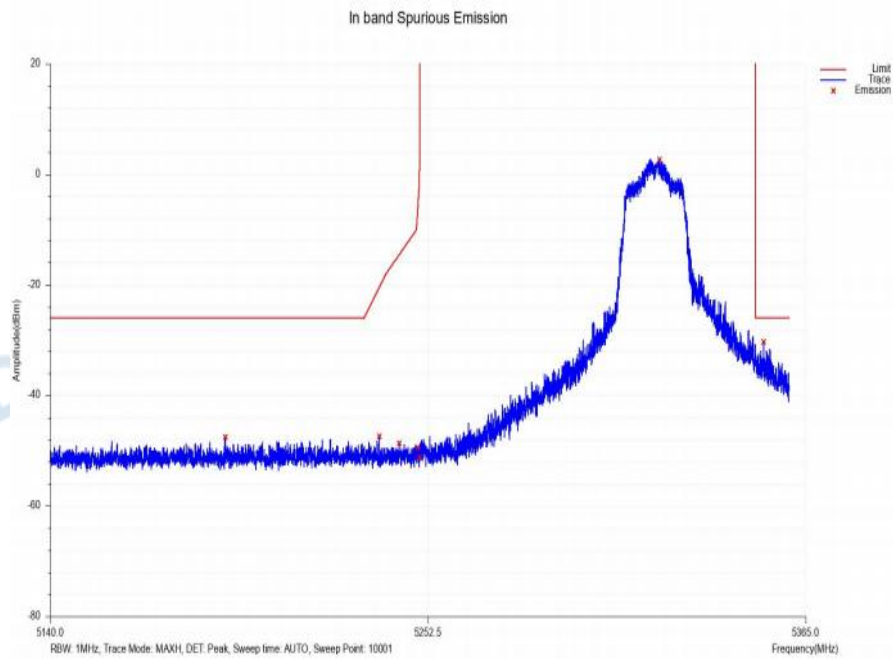


Out_of_band_NVNT_ANT1_802_11n(HT20)_5320

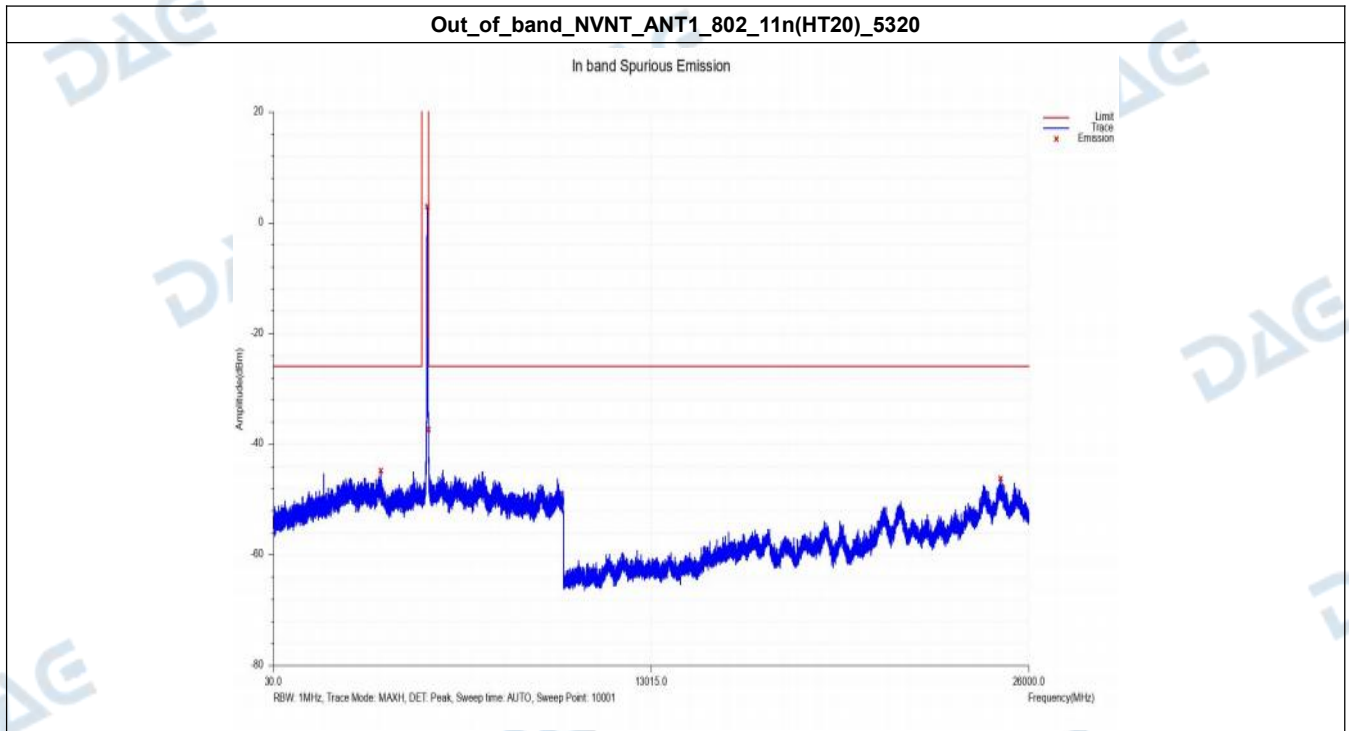


In_band_NVNT_ANT1_802_11ac(VHT20)_5260

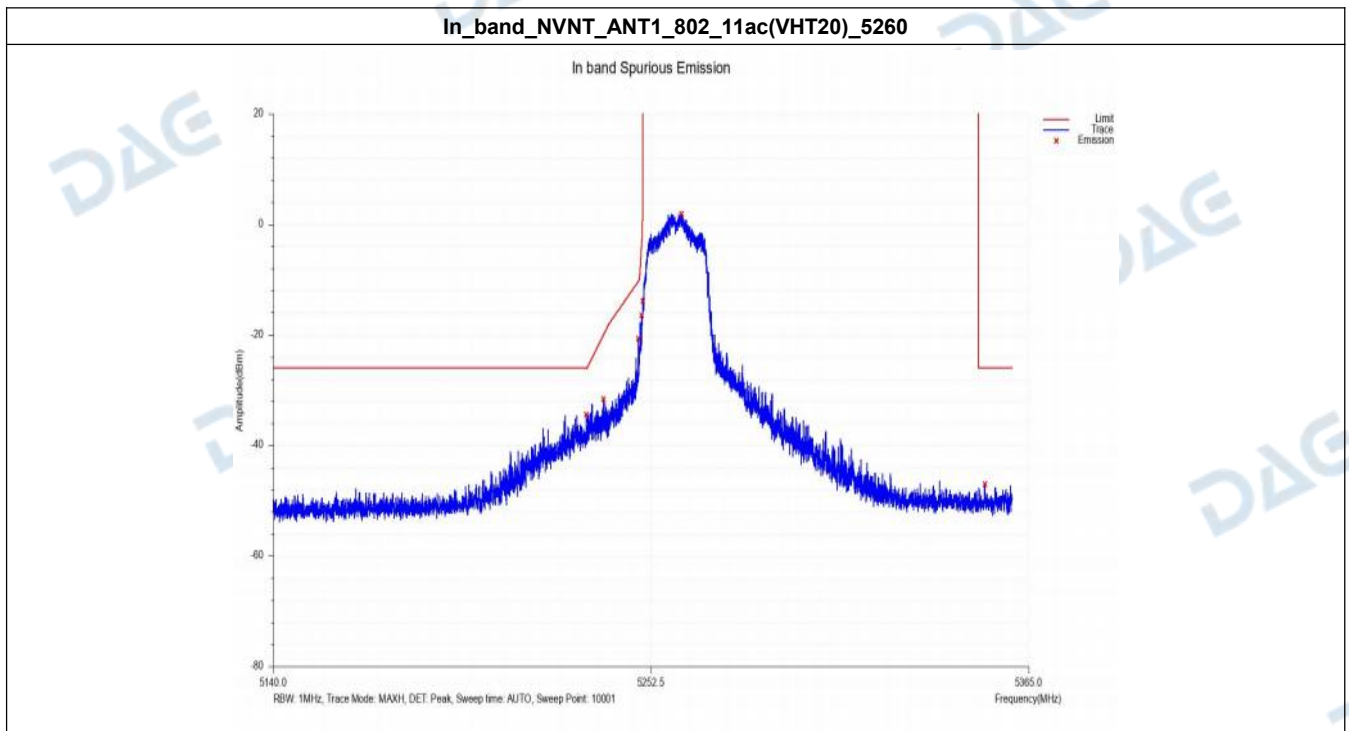


Out_of_band_NVNT_ANT1_802_11ac(VHT20)_5260

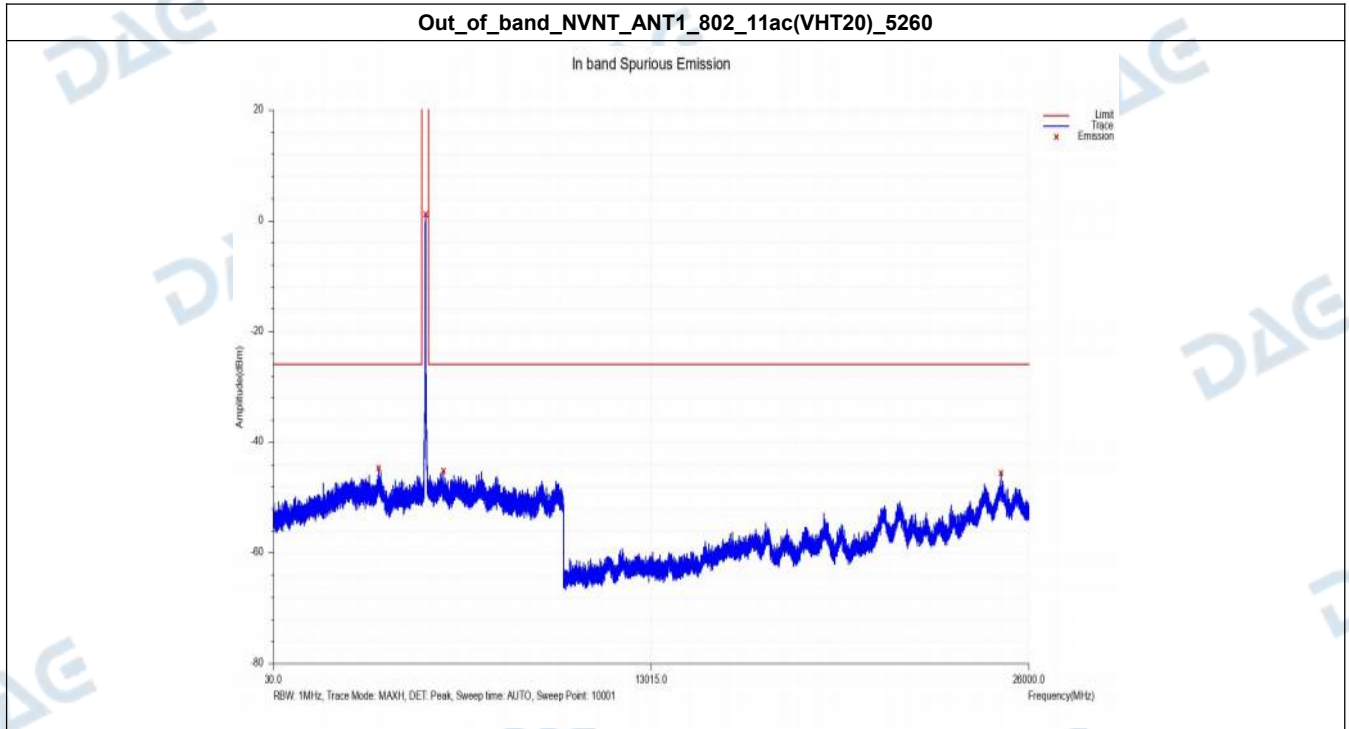


In_band_NVNT_ANT1_802_11ac(VHT20)_5300

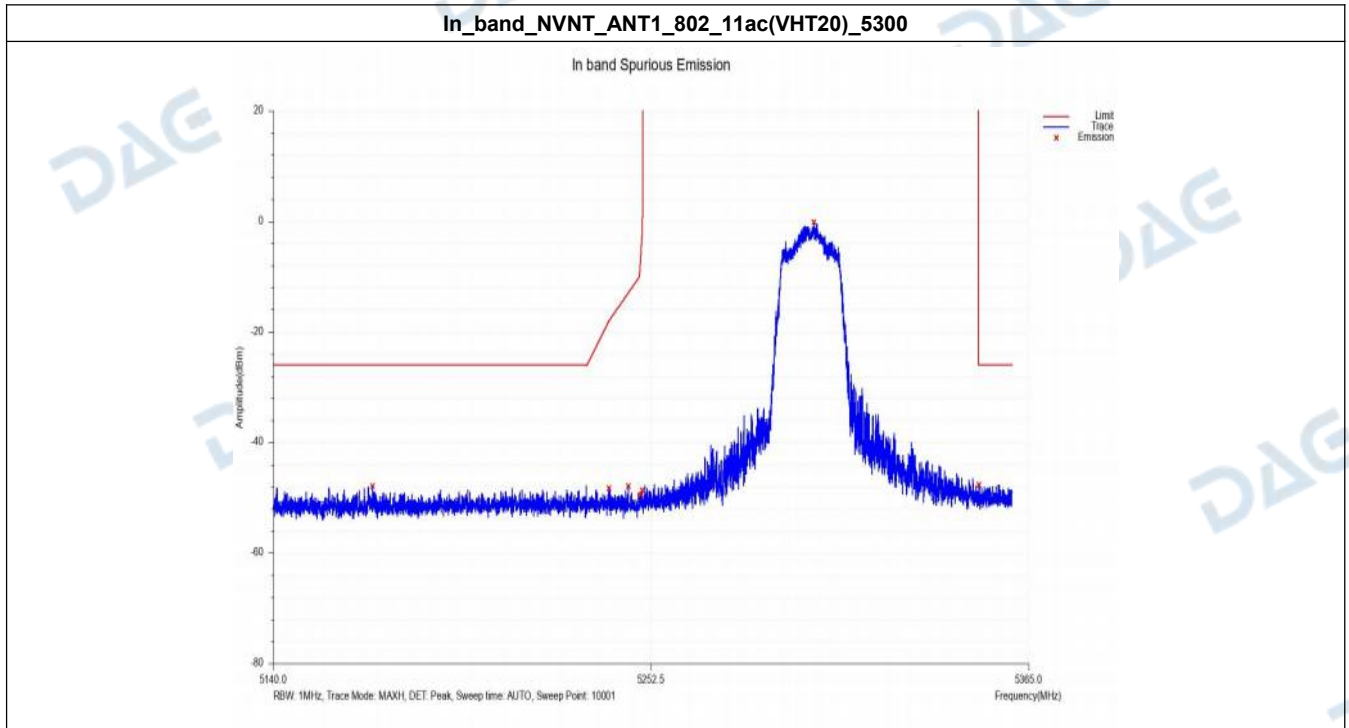


Out_of_band_NVNT_ANT1_802_11ac(VHT20)_5300

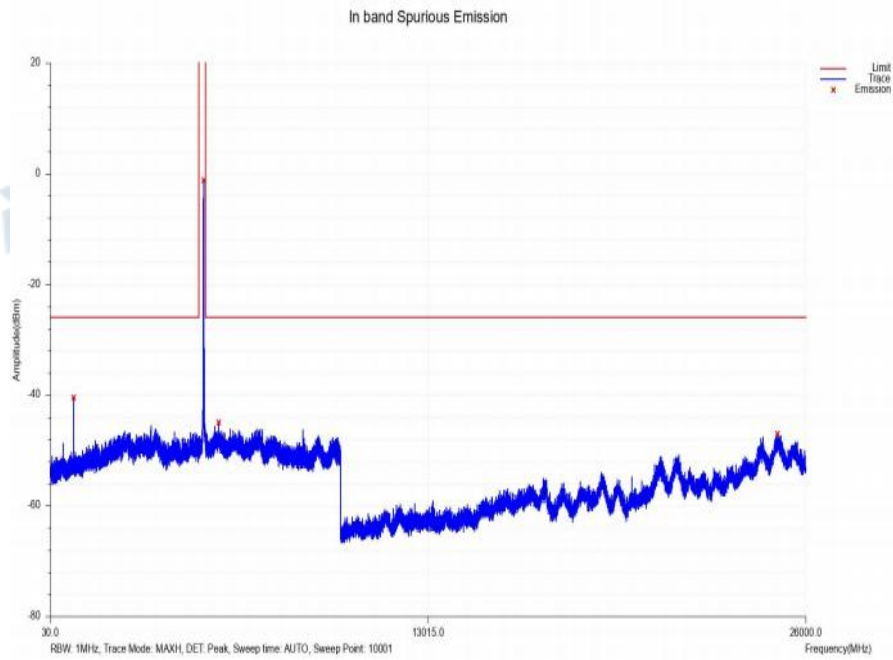


In_band_NVNT_ANT1_802_11ac(VHT20)_5320

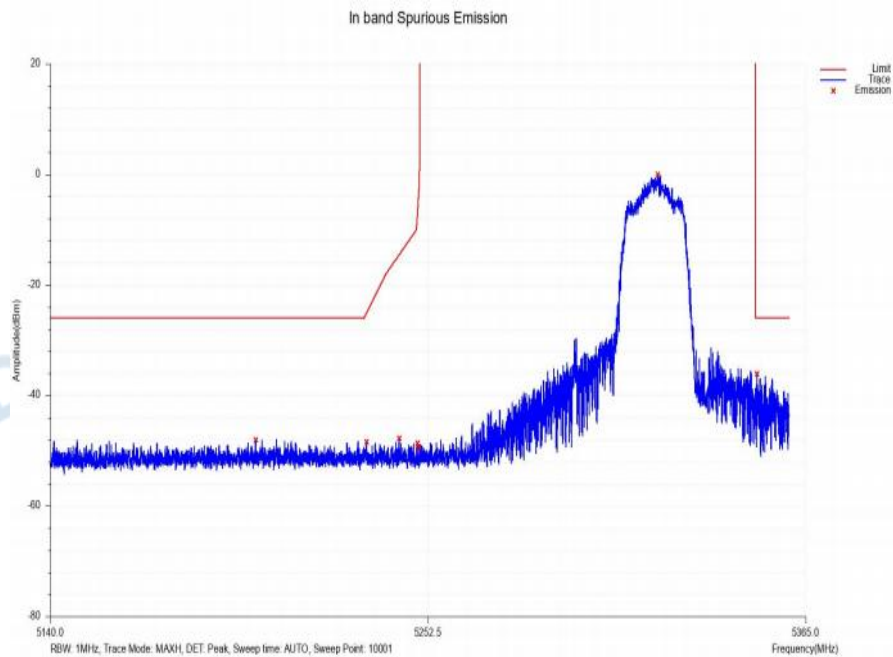


Out_of_band_NVNT_ANT1_802_11ac(VHT20)_5320

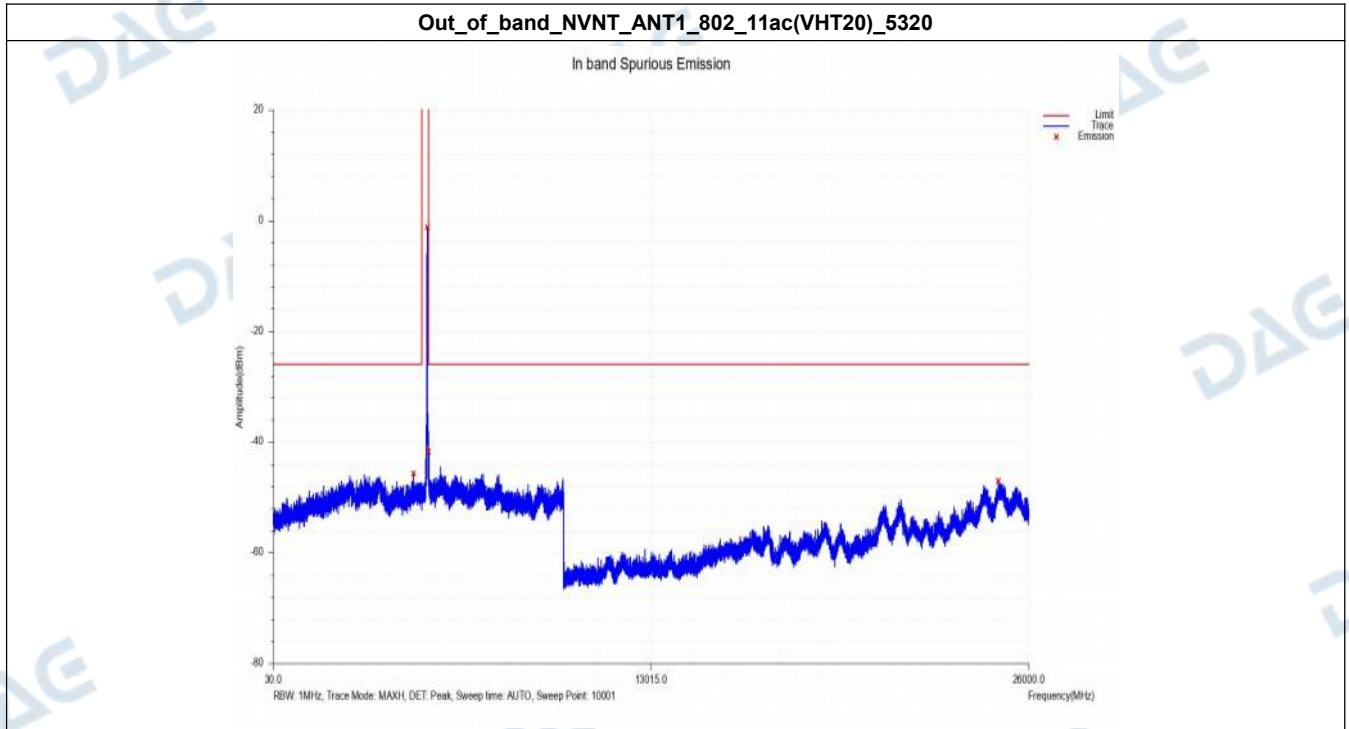


In_band_NVNT_ANT1_802_11n(HT40)_5270

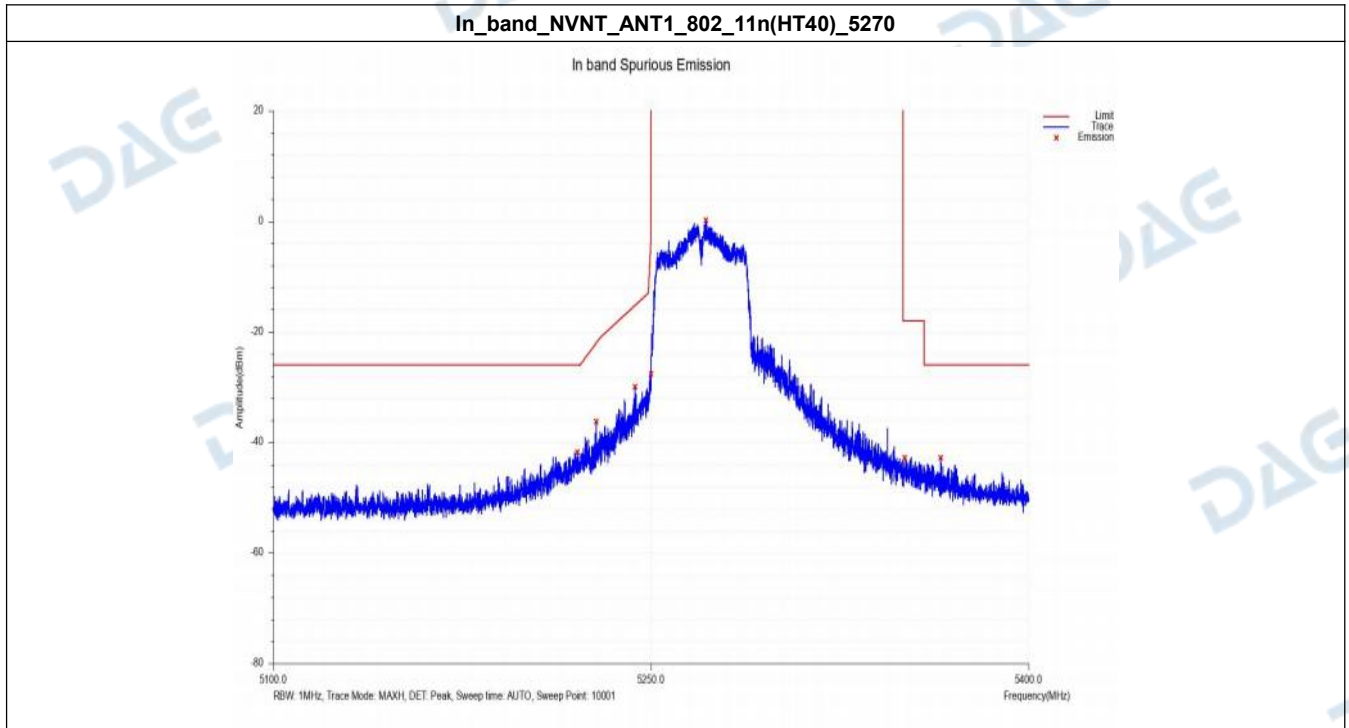


Out_of_band_NVNT_ANT1_802_11n(HT40)_5270

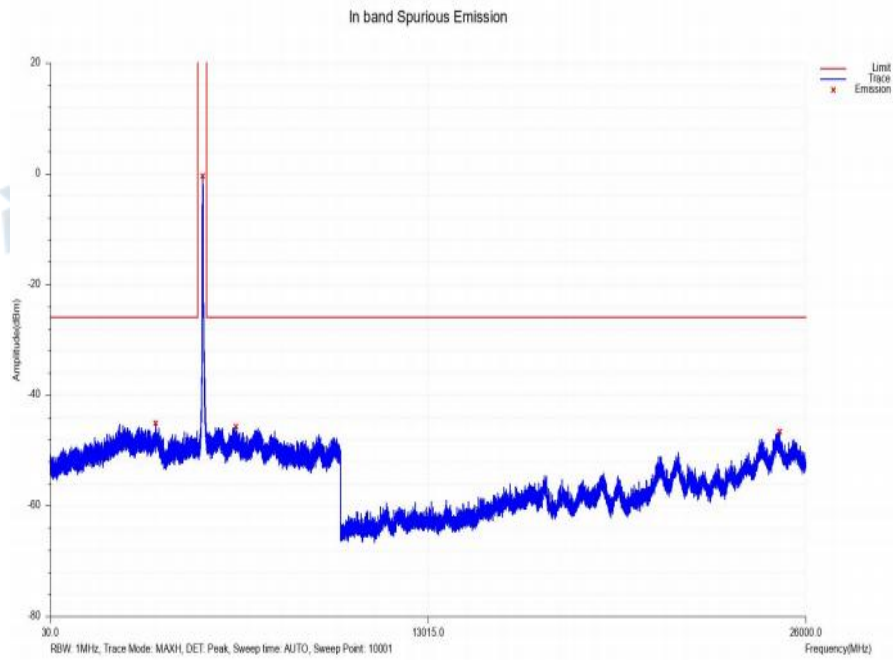


In_band_NVNT_ANT1_802_11n(HT40)_5310

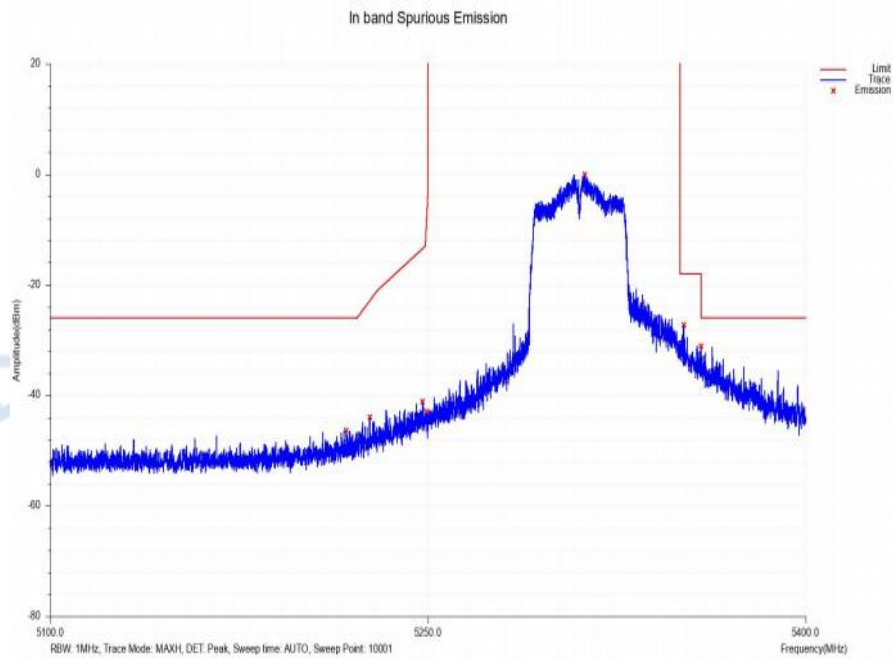


Out_of_band_NVNT_ANT1_802_11n(HT40)_5310

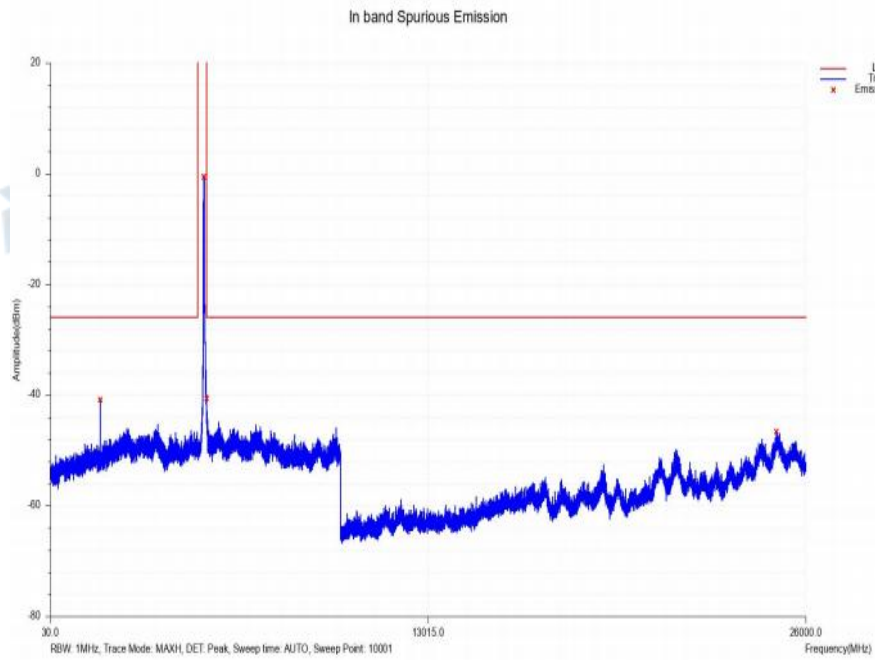


In_band_NVNT_ANT1_802_11ac(VHT40)_5270

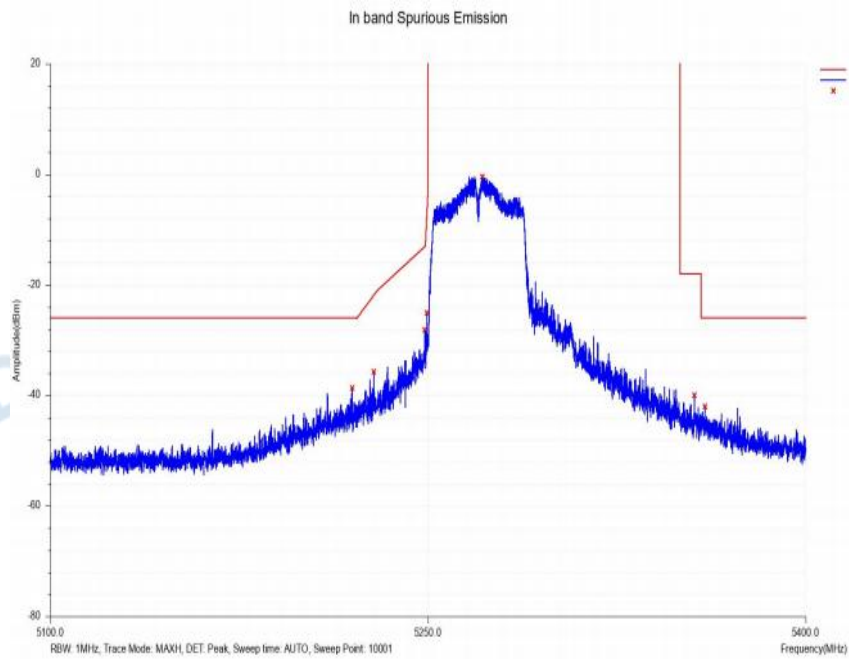


Out_of_band_NVNT_ANT1_802_11ac(VHT40)_5270

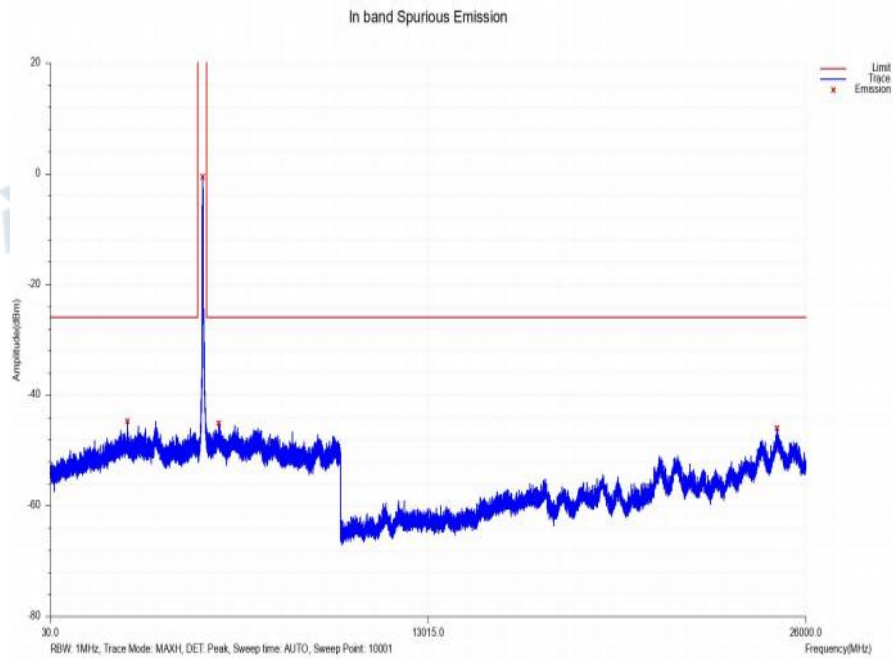


In_band_NVNT_ANT1_802_11ac(VHT40)_5310

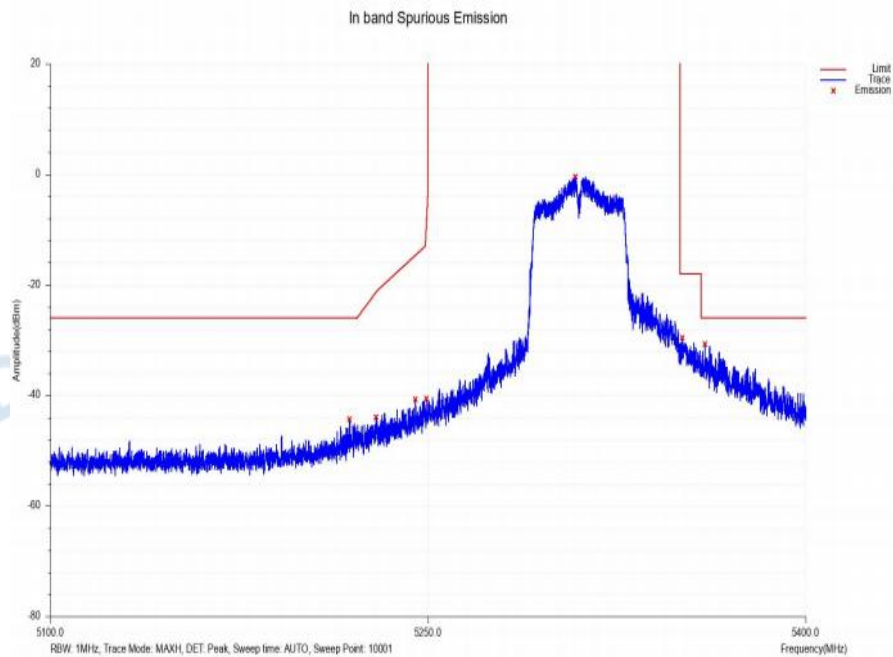

Out_of_band_NVNT_ANT1_802_11ac(VHT40)_5310

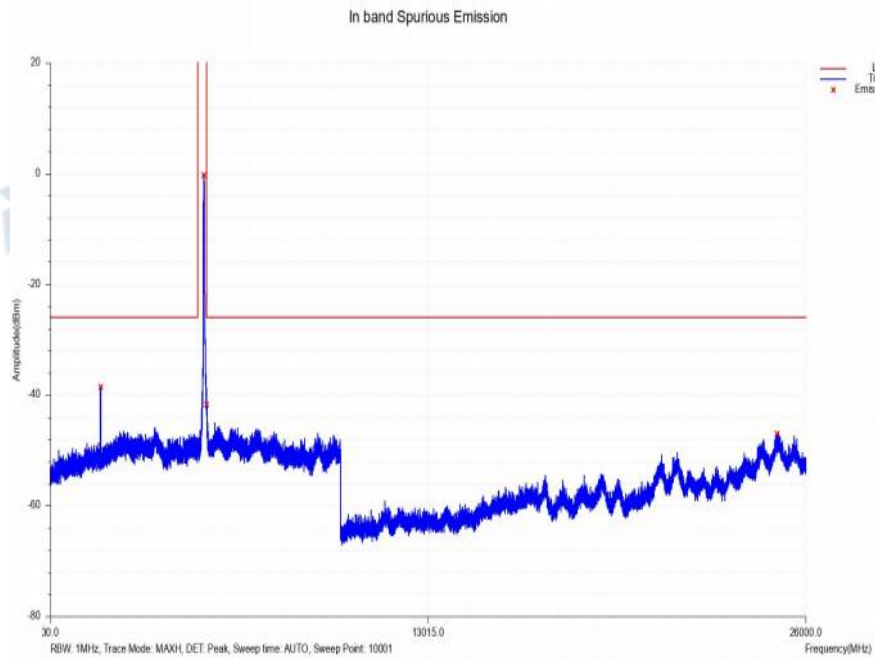


In_band_NVNT_ANT1_802_11ac(VHT80)_5290

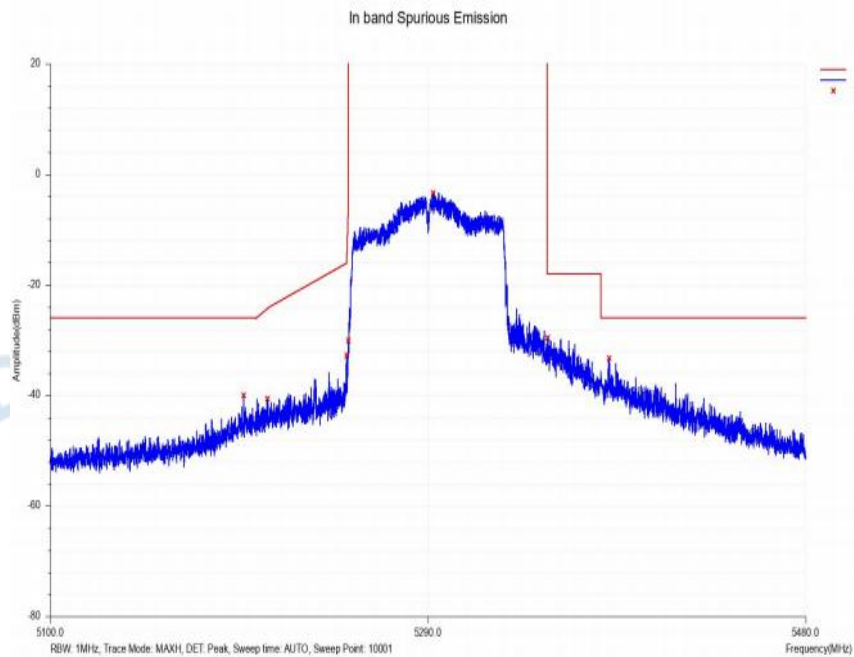

Out_of_band_NVNT_ANT1_802_11ac(VHT80)_5290


In band Spurious Emission

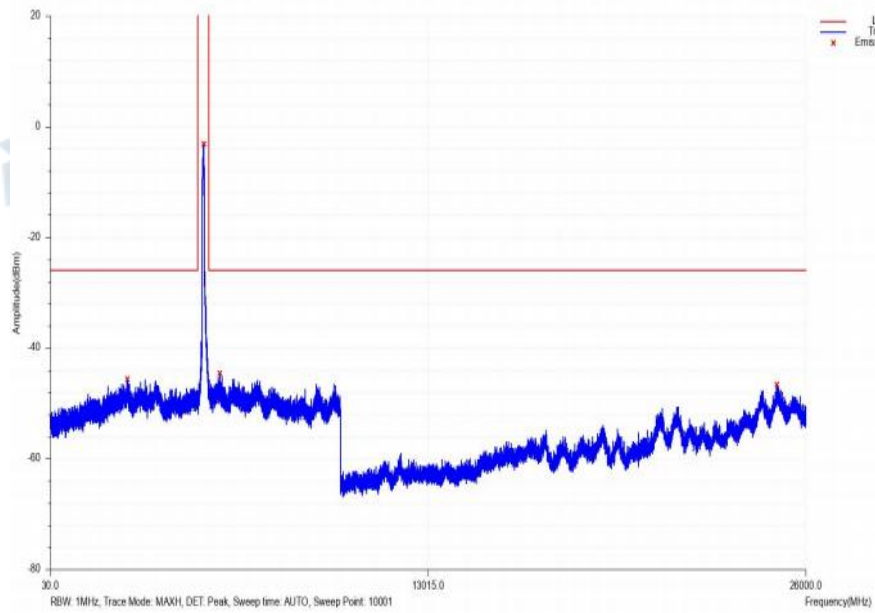


6. ACP Measure

Condition	Antenna	Mode	Frequency(MHz)	Frequency Offset(MHz)	Lower Level(dBc)	Upper Level(dBc)	Limit(dBc)	Result
NVNT	ANT1	802.11a	5260.00	20MHz	-29.66	-28.76	-25	Pass
NVNT	ANT1	802.11a	5260.00	40MHz	-41.26	-41.94	-40	Pass
NVNT	ANT1	802.11a	5300.00	20MHz	-28.55	-26.95	-25	Pass
NVNT	ANT1	802.11a	5300.00	40MHz	-42.76	-41.35	-40	Pass
NVNT	ANT1	802.11a	5320.00	20MHz	-28.69	-26.73	-25	Pass
NVNT	ANT1	802.11a	5320.00	40MHz	-41.67	-41.50	-40	Pass
NVNT	ANT1	802.11n(HT20)	5260.00	20MHz	-30.05	-26.73	-25	Pass
NVNT	ANT1	802.11n(HT20)	5260.00	40MHz	-46.09	-43.38	-40	Pass
NVNT	ANT1	802.11n(HT20)	5300.00	20MHz	-29.68	-26.37	-25	Pass
NVNT	ANT1	802.11n(HT20)	5300.00	40MHz	-46.09	-41.98	-40	Pass
NVNT	ANT1	802.11n(HT20)	5320.00	20MHz	-28.25	-24.68	-25	Fail
NVNT	ANT1	802.11n(HT20)	5320.00	40MHz	-42.91	-38.44	-40	Fail
NVNT	ANT1	802.11ac(VHT20)	5260.00	20MHz	-30.05	-27.16	-25	Pass
NVNT	ANT1	802.11ac(VHT20)	5260.00	40MHz	-42.31	-40.52	-40	Pass
NVNT	ANT1	802.11ac(VHT20)	5300.00	20MHz	-33.83	-33.41	-25	Pass
NVNT	ANT1	802.11ac(VHT20)	5300.00	40MHz	-50.33	-48.10	-40	Pass
NVNT	ANT1	802.11ac(VHT20)	5320.00	20MHz	-32.13	-33.50	-25	Pass
NVNT	ANT1	802.11ac(VHT20)	5320.00	40MHz	-43.59	-43.30	-40	Pass
NVNT	ANT1	802.11n(HT40)	5270.00	40MHz	-33.44	-25.17	-25	Pass
NVNT	ANT1	802.11n(HT40)	5270.00	80MHz	-47.73	-40.67	-40	Pass
NVNT	ANT1	802.11n(HT40)	5310.00	40MHz	-32.97	-24.98	-25	Fail
NVNT	ANT1	802.11n(HT40)	5310.00	80MHz	-45.19	-38.82	-40	Fail
NVNT	ANT1	802.11ac(VHT40)	5270.00	40MHz	-33.88	-25.22	-25	Pass
NVNT	ANT1	802.11ac(VHT40)	5270.00	80MHz	-45.88	-39.48	-40	Fail
NVNT	ANT1	802.11ac(VHT40)	5310.00	40MHz	-32.10	-24.48	-25	Fail
NVNT	ANT1	802.11ac(VHT40)	5310.00	80MHz	-43.98	-37.59	-40	Fail
NVNT	ANT1	802.11ac(VHT80)	5290.00	80MHz	-36.06	-26.48	-25	Pass


ACP_Measure_NVNT_ANT1_802_11a_5260

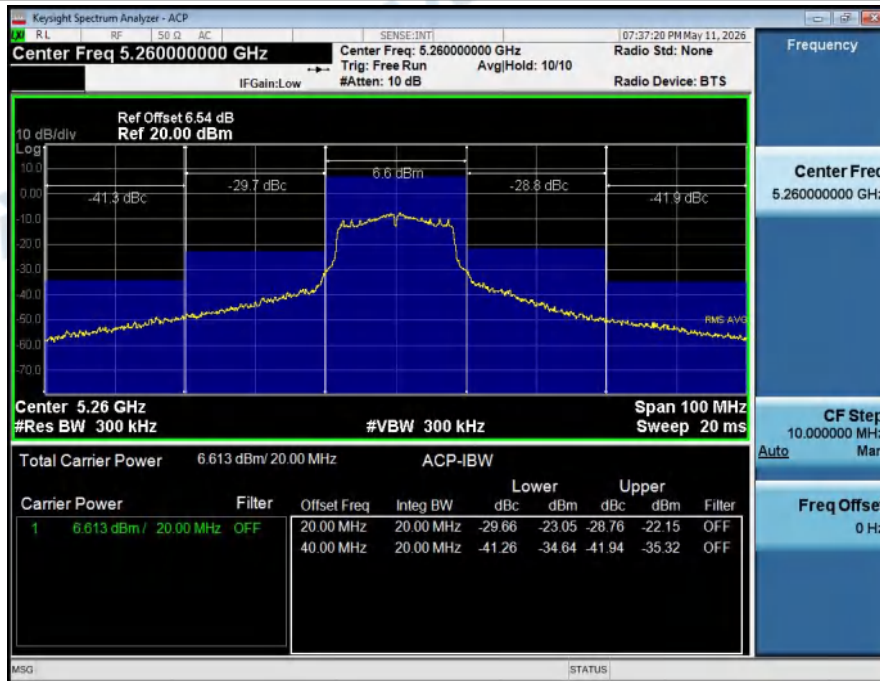

ACP_Measure_NVNT_ANT1_802_11a_5300

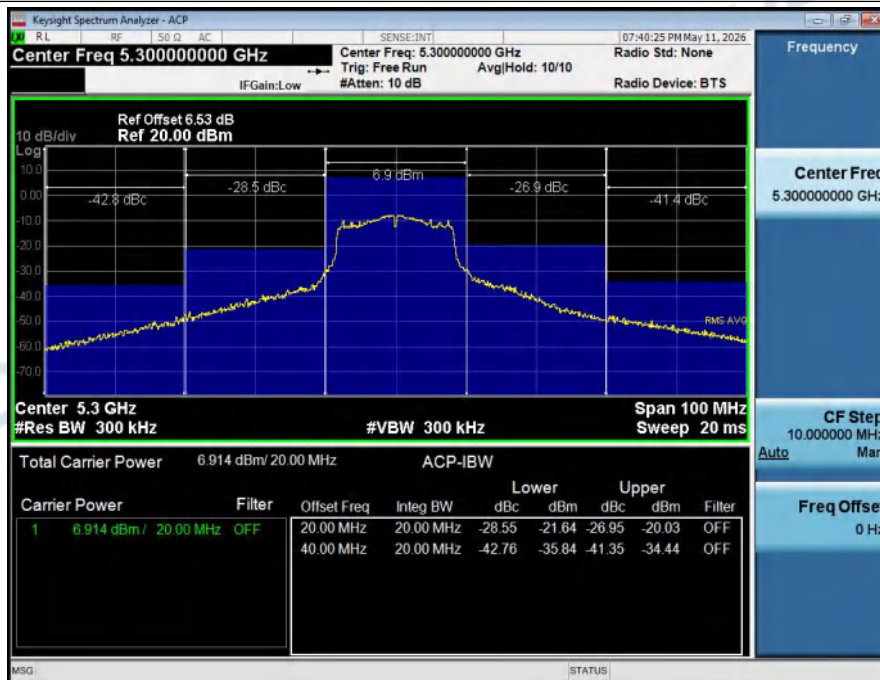

ACP_Measure_NVNT_ANT1_802_11a_5320

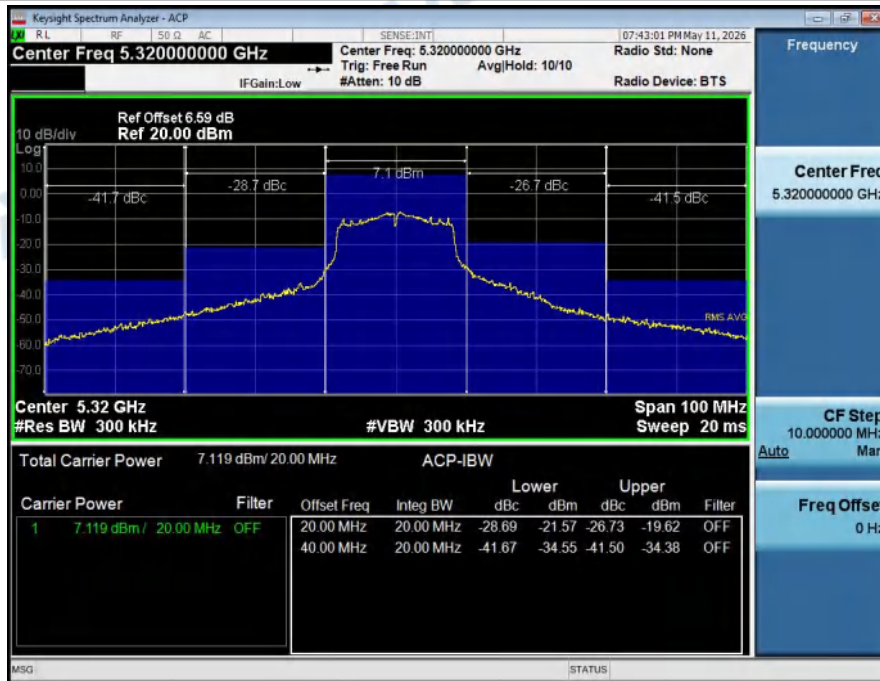


ACP_Measure_NVNT_ANT1_802_11n(HT20)_5260




ACP_Measure_NVNT_ANT1_802_11n(HT20)_5300




ACP_Measure_NVNT_ANT1_802_11n(HT20)_5320

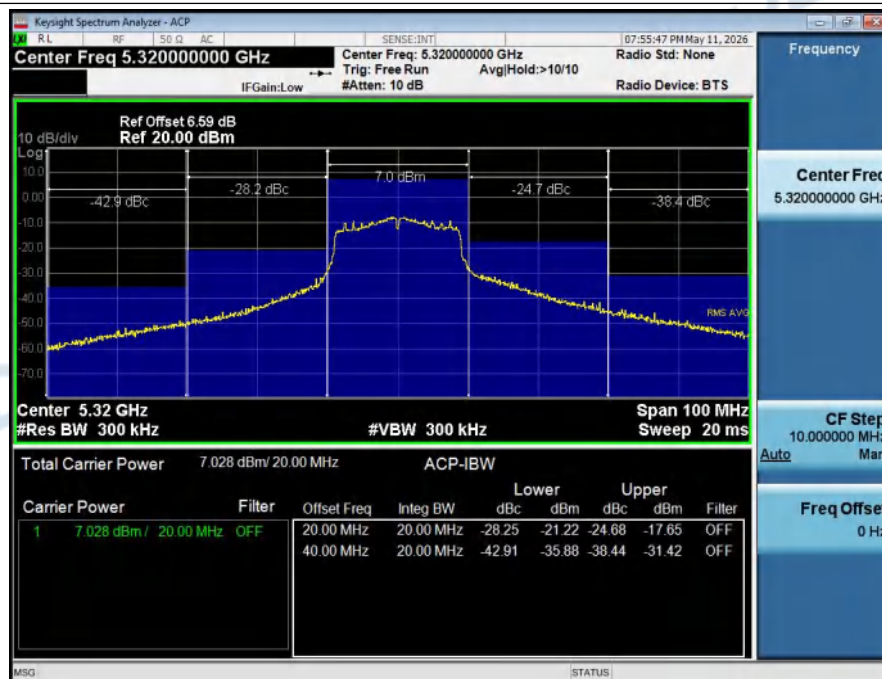


ACP_Measure_NVNT_ANT1_802_11ac(VHT20)_5260

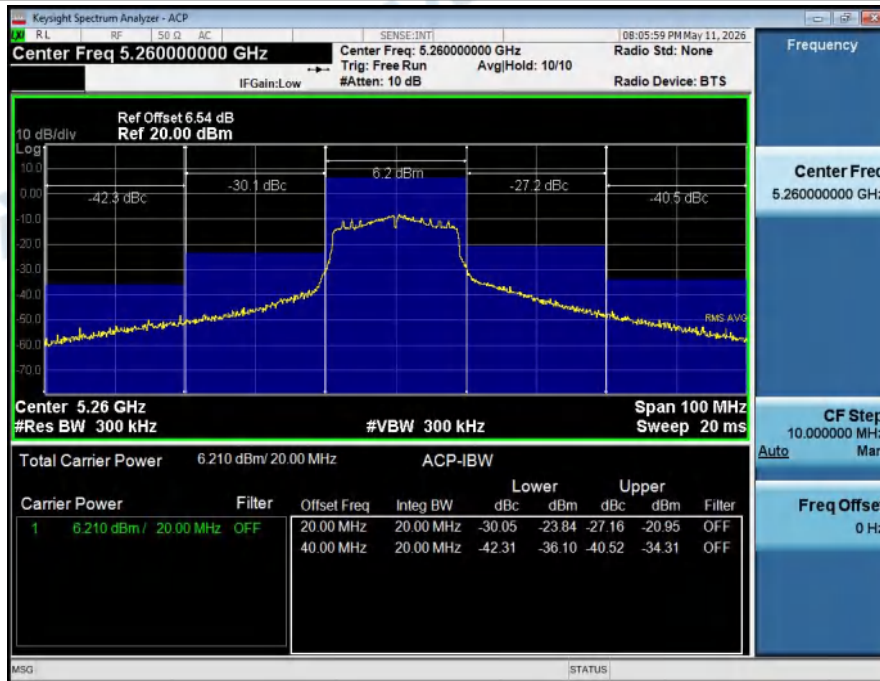

ACP_Measure_NVNT_ANT1_802_11ac(VHT20)_5300

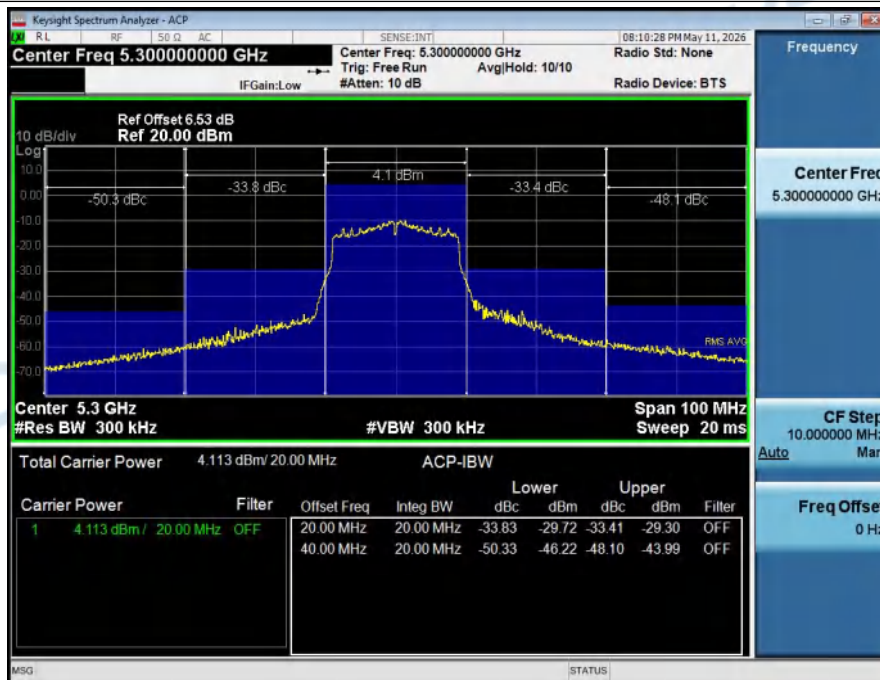


ACP_Measure_NVNT_ANT1_802_11ac(VHT20)_5320

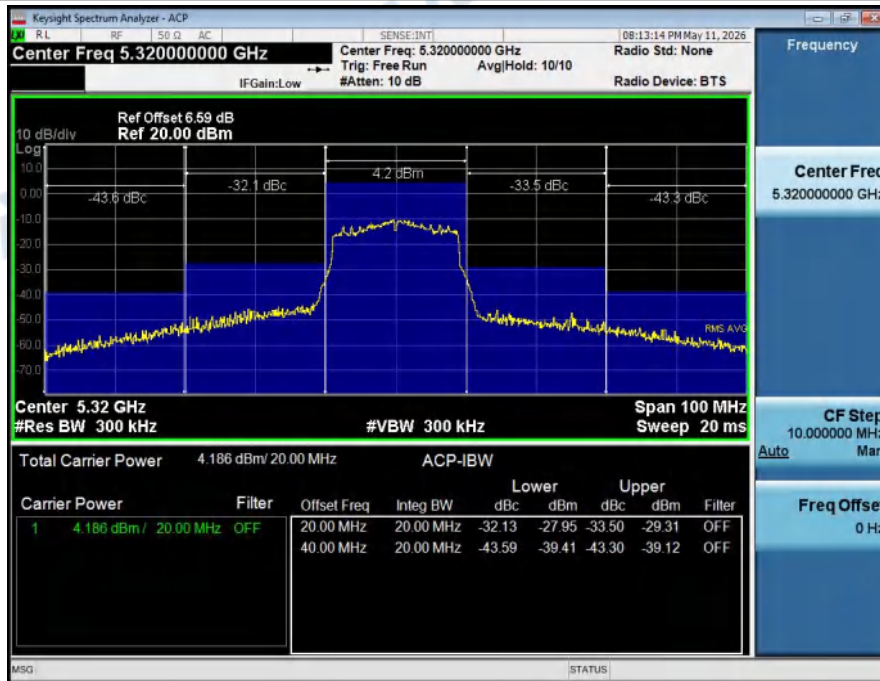

ACP_Measure_NVNT_ANT1_802_11n(HT40)_5270




ACP_Measure_NVNT_ANT1_802_11n(HT40)_5310

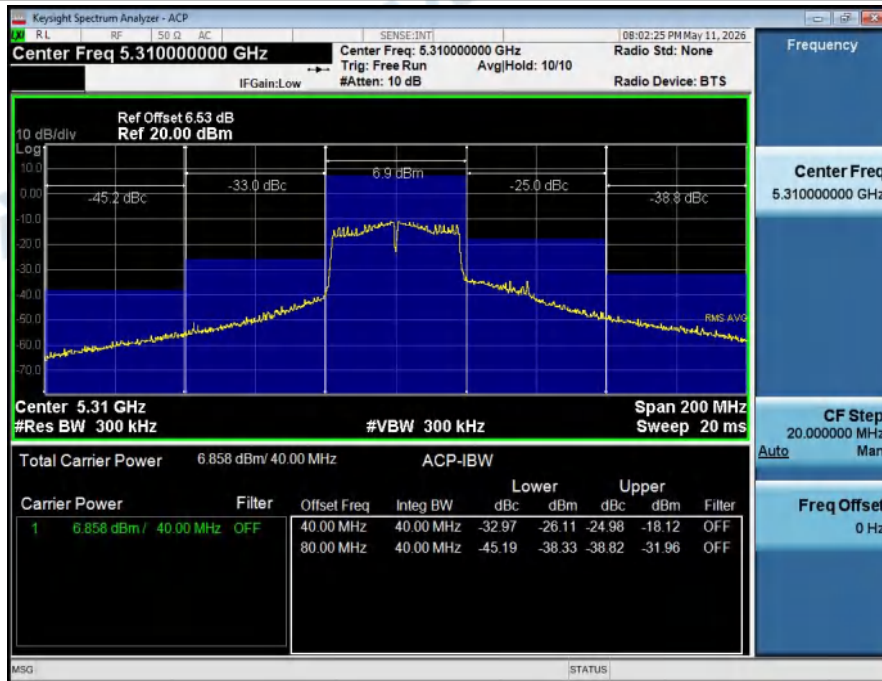

ACP_Measure_NVNT_ANT1_802_11ac(VHT40)_5270



ACP_Measure_NVNT_ANT1_802_11ac(VHT40)_5310

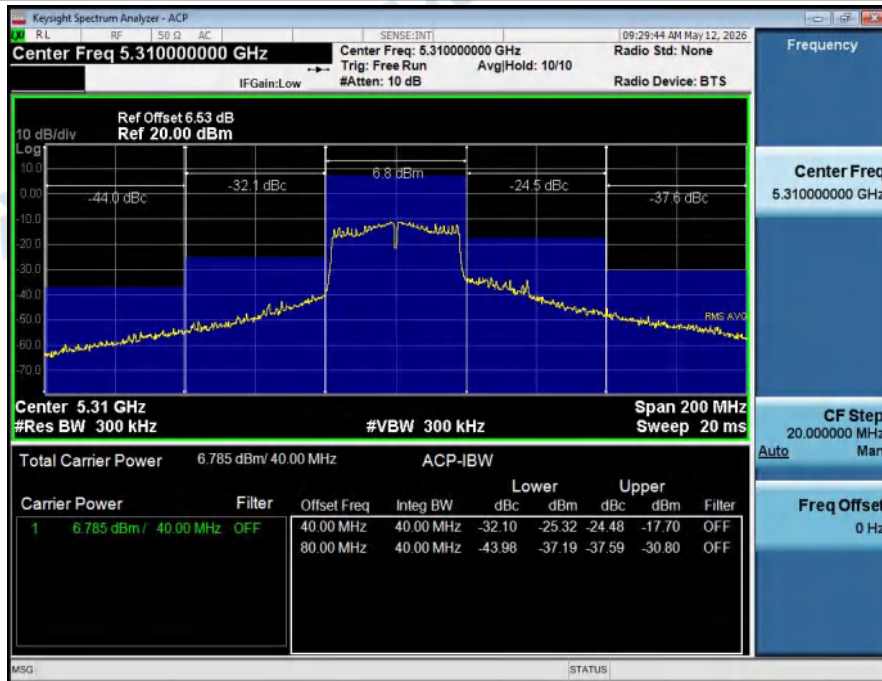


ACP_Measure_NVNT_ANT1_802_11ac(VHT80)_5290




7. Frequency Tolerance

Condition	Antenna	Modulation	Frequency (MHz)	Test Frequency(MHz)	Frequency Tolerance(ppm)	Limit(ppm)	Result
NTNV	ANT1	802.11a	5260.00	5259.952	-9.125	±20	Pass
NTLV	ANT1	802.11a	5260.00	5259.951	-9.316	±20	Pass
NTHV	ANT1	802.11a	5260.00	5259.951	-9.316	±20	Pass
NTNV	ANT1	802.11a	5300.00	5299.950	-9.434	±20	Pass
NTLV	ANT1	802.11a	5300.00	5299.950	-9.434	±20	Pass
NTHV	ANT1	802.11a	5300.00	5299.950	-9.434	±20	Pass
NTNV	ANT1	802.11a	5320.00	5319.950	-9.398	±20	Pass
NTLV	ANT1	802.11a	5320.00	5319.950	-9.398	±20	Pass
NTHV	ANT1	802.11a	5320.00	5319.950	-9.398	±20	Pass


Frequency_Tolerance_NTNV_ANT1_802_11a_5260_20M

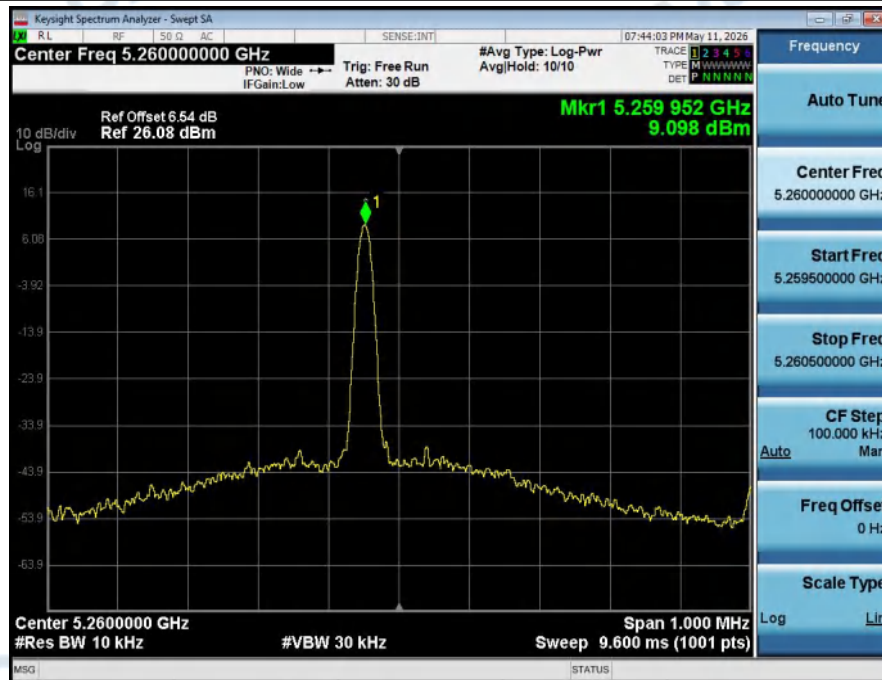


Frequency_Tolerance_NTLV_ANT1_802_11a_5260_20M

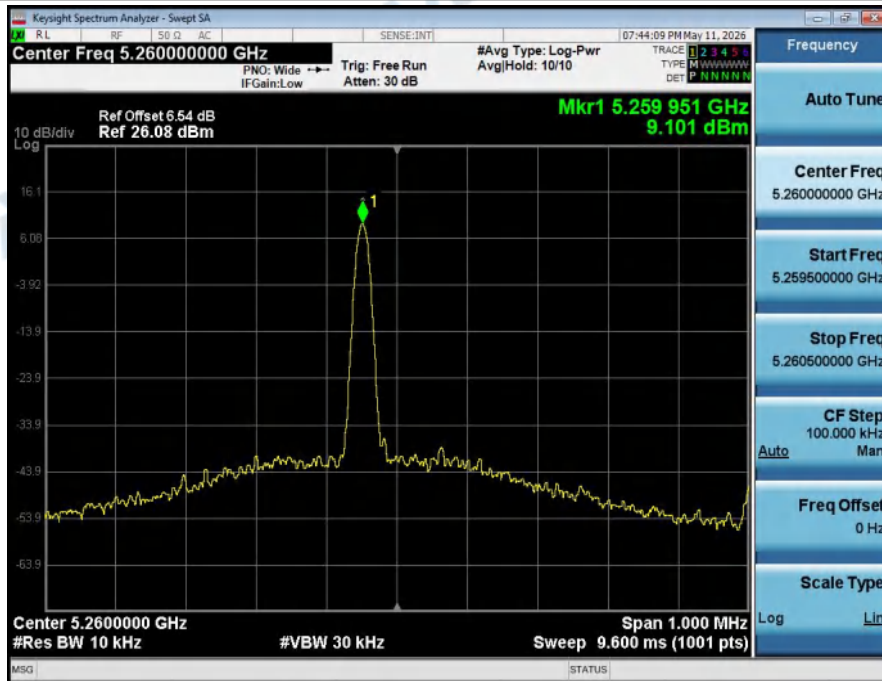


Frequency_Tolerance_NTHV_ANT1_802_11a_5260_20M

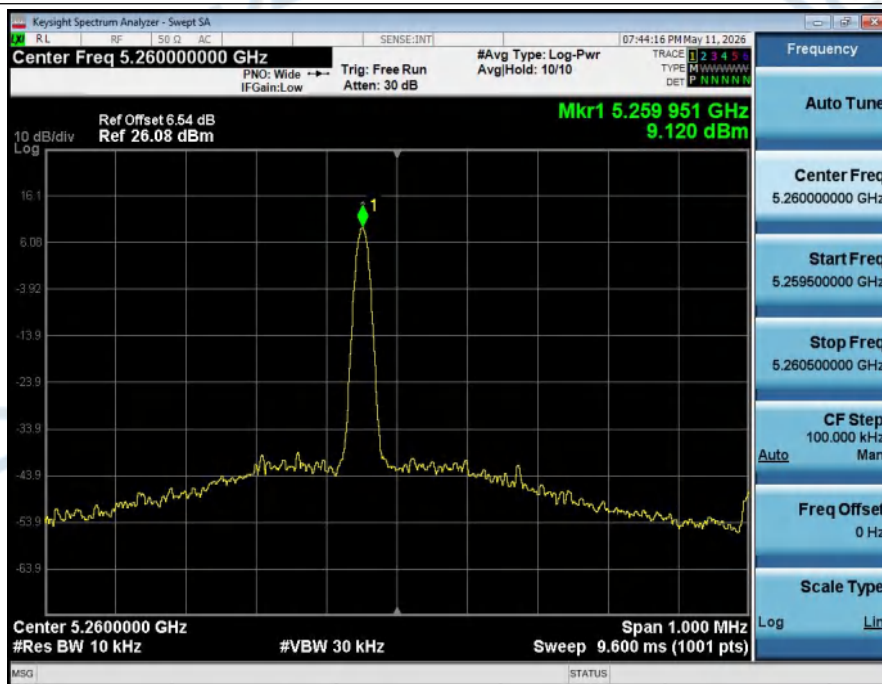


Frequency_Tolerance_NTNV_ANT1_802_11a_5300_20M

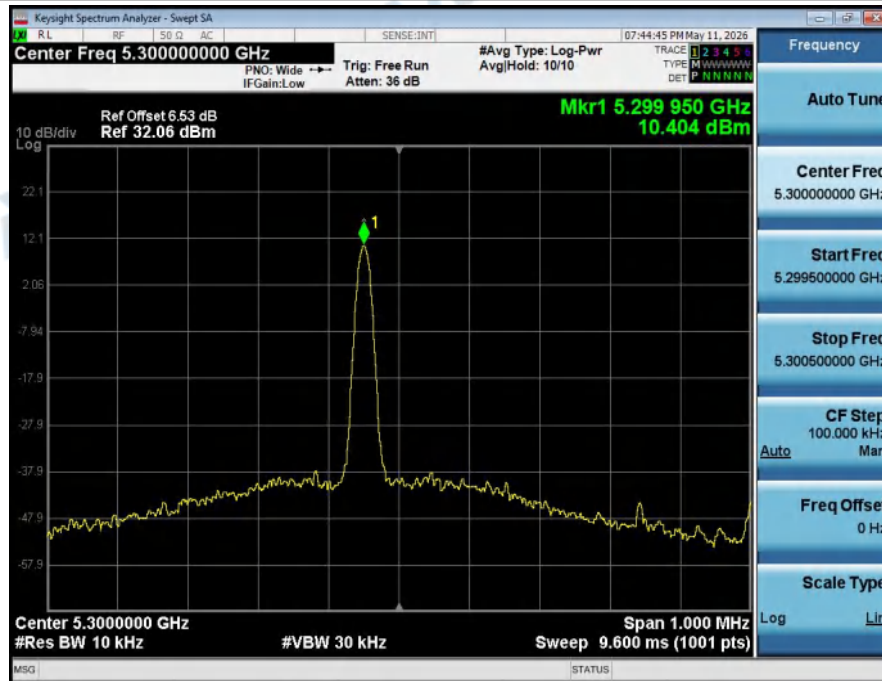


Frequency_Tolerance_NTLV_ANT1_802_11a_5300_20M

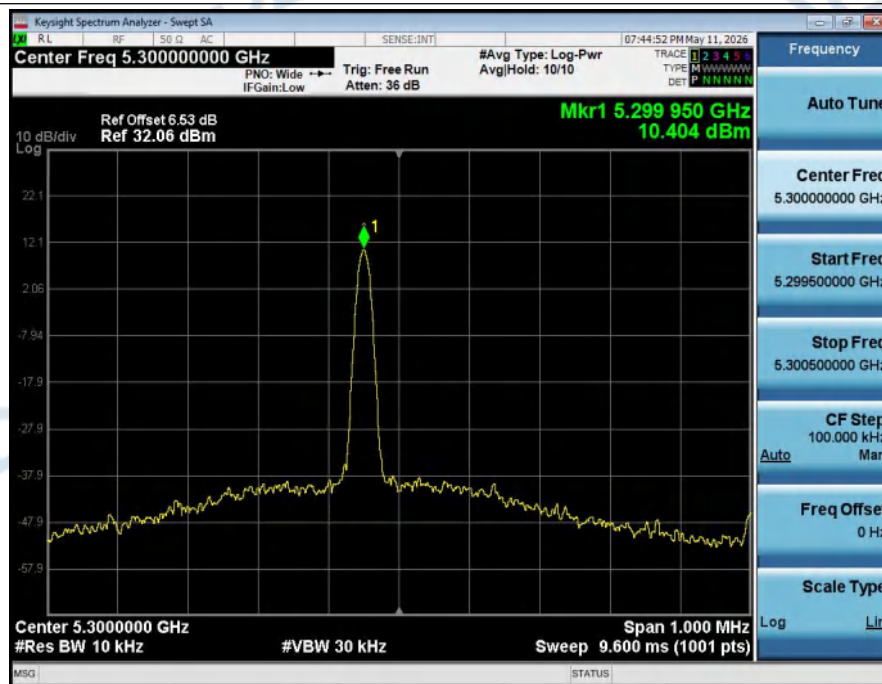


Frequency_Tolerance_NTHV_ANT1_802_11a_5300_20M

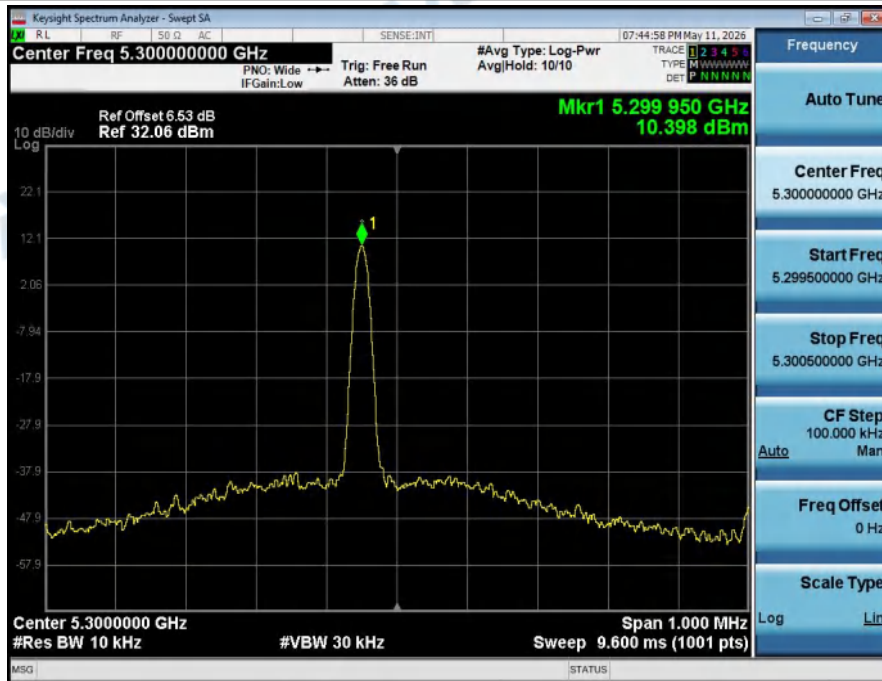


Frequency_Tolerance_NTNV_ANT1_802_11a_5320_20M

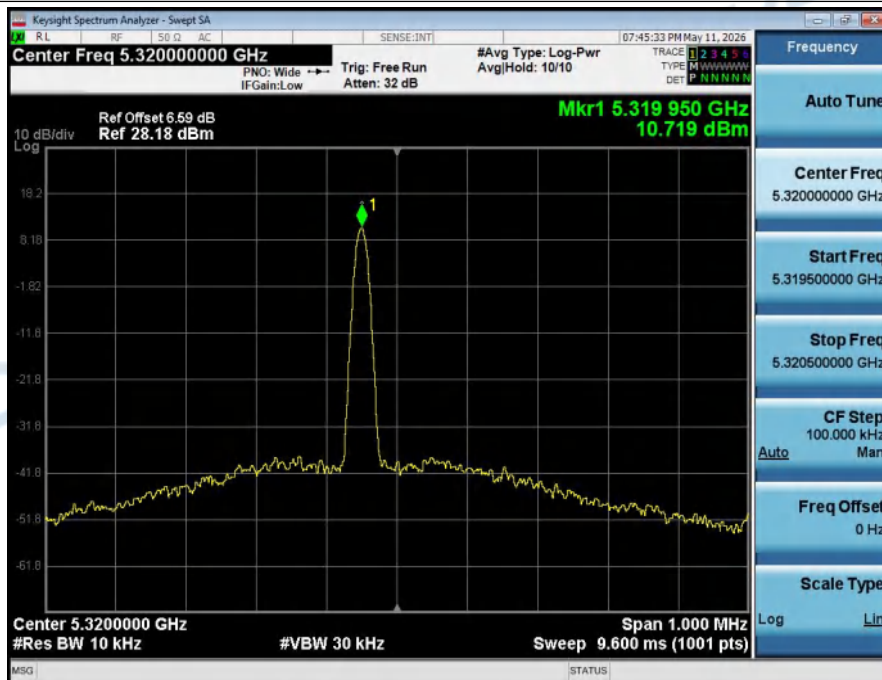

Frequency_Tolerance_NTLV_ANT1_802_11a_5320_20M

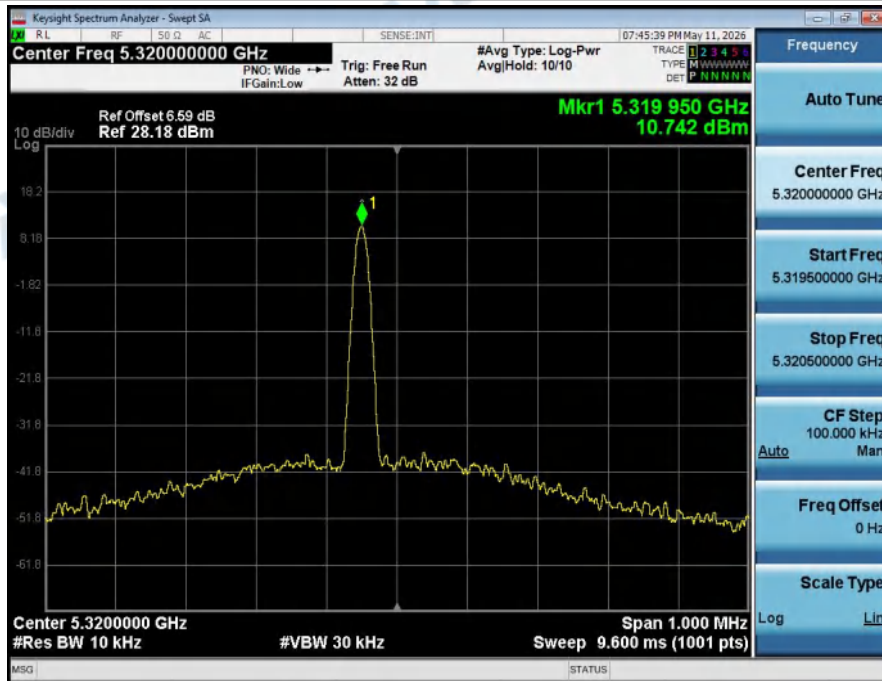


Frequency_Tolerance_NTHV_ANT1_802_11a_5320_20M

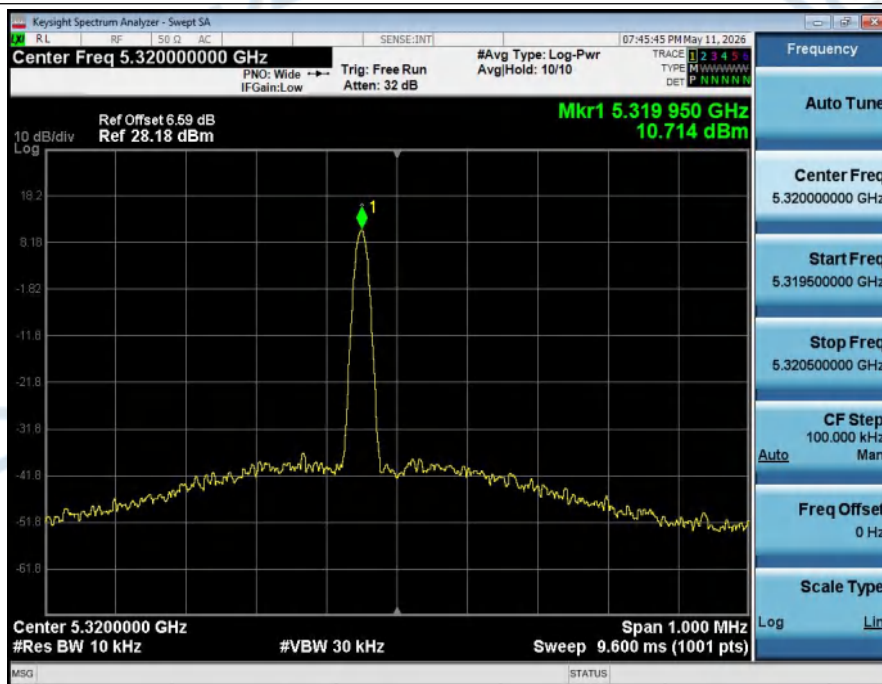


8. Secondary emission of radio wave

Condition	Mode	Channel	Range (MHz)	RBW (kHz)	Spur. Freq. (MHz)	Spur. Lev.(dBm)	Spur. Lev	Limit	Over 1/10 Limit	Read Lev.(dBm)	Read Lev.	Result
NVNT	802.11a	LCH	30.0~1000.0	100	997.09	-84.69	0.0033nW	4nW	NO	/	/	Pass
NVNT	802.11a	LCH	1000.0~13000.0	1000	5308.00	-63.01	0.5002nW	20nW	NO	/	/	Pass
NVNT	802.11a	MCH	30.0~1000.0	100	922.40	-84.30	0.0037nW	4nW	NO	/	/	Pass
NVNT	802.11a	MCH	1000.0~13000.0	1000	1756.00	-53.99	3.9927nW	20nW	NO	/	/	Pass
NVNT	802.11a	HCH	30.0~1000.0	100	906.88	-84.54	0.0035nW	4nW	NO	/	/	Pass
NVNT	802.11a	HCH	1000.0~13000.0	1000	5308.00	-62.84	0.5197nW	20nW	NO	/	/	Pass
NVNT	802.11n(HT20)	LCH	30.0~1000.0	100	875.84	-84.03	0.0039nW	4nW	NO	/	/	Pass
NVNT	802.11n(HT20)	LCH	1000.0~13000.0	1000	5320.00	-63.78	0.4186nW	20nW	NO	/	/	Pass
NVNT	802.11n(HT20)	MCH	30.0~1000.0	100	990.30	-84.09	0.0039nW	4nW	NO	/	/	Pass
NVNT	802.11n(HT20)	MCH	1000.0~13000.0	1000	5320.00	-62.91	0.5120nW	20nW	NO	/	/	Pass
NVNT	802.11n(HT20)	HCH	30.0~1000.0	100	753.62	-84.12	0.0038nW	4nW	NO	/	/	Pass
NVNT	802.11n(HT20)	HCH	1000.0~13000.0	1000	1756.00	-50.36	9.2124nW	20nW	NO	/	/	Pass
NVNT	802.11ac(VHT20)	LCH	30.0~1000.0	100	489.78	-83.21	0.0047nW	4nW	NO	/	/	Pass
NVNT	802.11ac(VHT20)	LCH	1000.0~13000.0	1000	1768.00	-60.86	0.8194nW	20nW	NO	/	/	Pass
NVNT	802.11ac(VHT20)	MCH	30.0~1000.0	100	808.91	-83.65	0.0043nW	4nW	NO	/	/	Pass
NVNT	802.11ac(VHT20)	MCH	1000.0~13000.0	1000	5308.00	-62.10	0.6166nW	20nW	NO	/	/	Pass
NVNT	802.11ac(VHT20)	HCH	30.0~1000.0	100	838.98	-84.15	0.0038nW	4nW	NO	/	/	Pass
NVNT	802.11ac(VHT20)	HCH	1000.0~13000.0	1000	5308.00	-62.98	0.5029nW	20nW	NO	/	/	Pass
NVNT	802.11n(HT40)	LCH	30.0~1000.0	100	764.29	-84.21	0.0037nW	4nW	NO	/	/	Pass
NVNT	802.11n(HT40)	LCH	1000.0~13000.0	1000	5308.00	-62.68	0.5397nW	20nW	NO	/	/	Pass
NVNT	802.11n(HT40)	HCH	30.0~1000.0	100	796.30	-84.15	0.0038nW	4nW	NO	/	/	Pass
NVNT	802.11n(HT40)	HCH	1000.0~13000.0	1000	5308.00	-62.41	0.5735nW	20nW	NO	/	/	Pass
NVNT	802.11ac(VHT40)	LCH	30.0~1000.0	100	738.10	-84.80	0.0033nW	4nW	NO	/	/	Pass
NVNT	802.11ac(VHT40)	LCH	1000.0~13000.0	1000	5308.00	-62.39	0.5768nW	20nW	NO	/	/	Pass
NVNT	802.11ac(VHT40)	HCH	30.0~1000.0	100	673.11	-84.23	0.0037nW	4nW	NO	/	/	Pass
NVNT	802.11ac(VHT40)	HCH	1000.0~13000.0	1000	5308.00	-62.42	0.5727nW	20nW	NO	/	/	Pass
NVNT	802.11ac(VHT80)	MCH	30.0~1000.0	100	452.92	-83.70	0.0042nW	4nW	NO	/	/	Pass
NVNT	802.11ac(VHT80)	MCH	1000.0~13000.0	1000	1756.00	-55.53	2.7992nW	20nW	NO	/	/	Pass


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11a_LCH

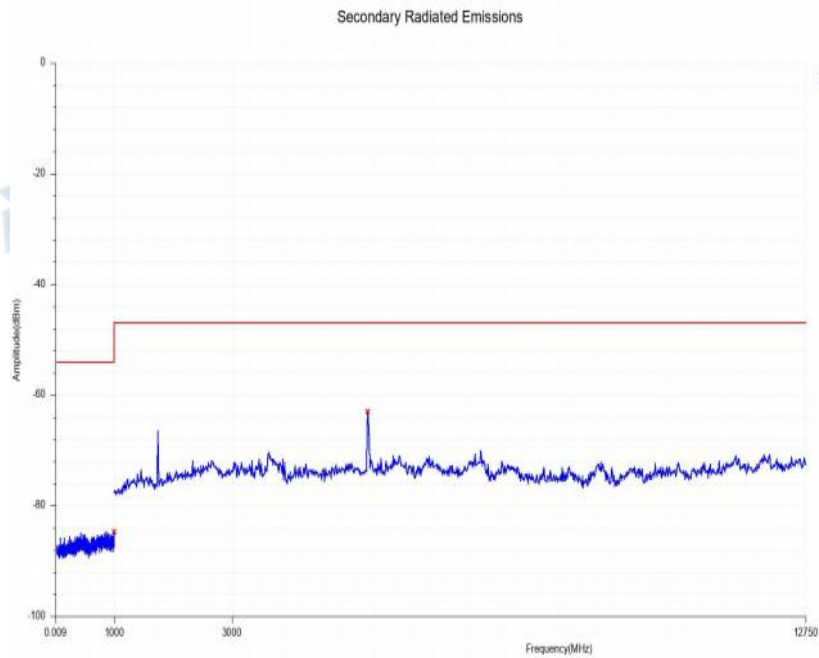


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11a_MCH

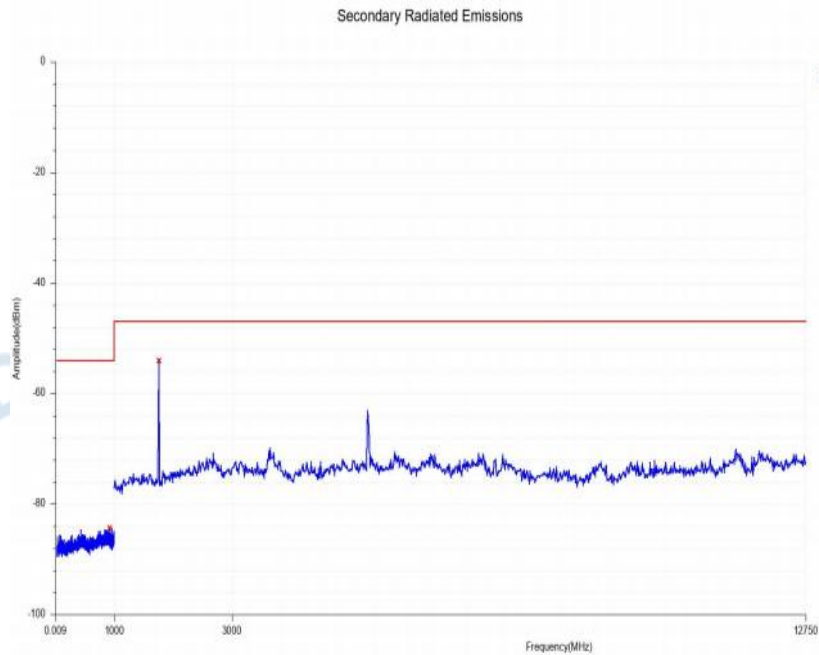


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11a_HCH

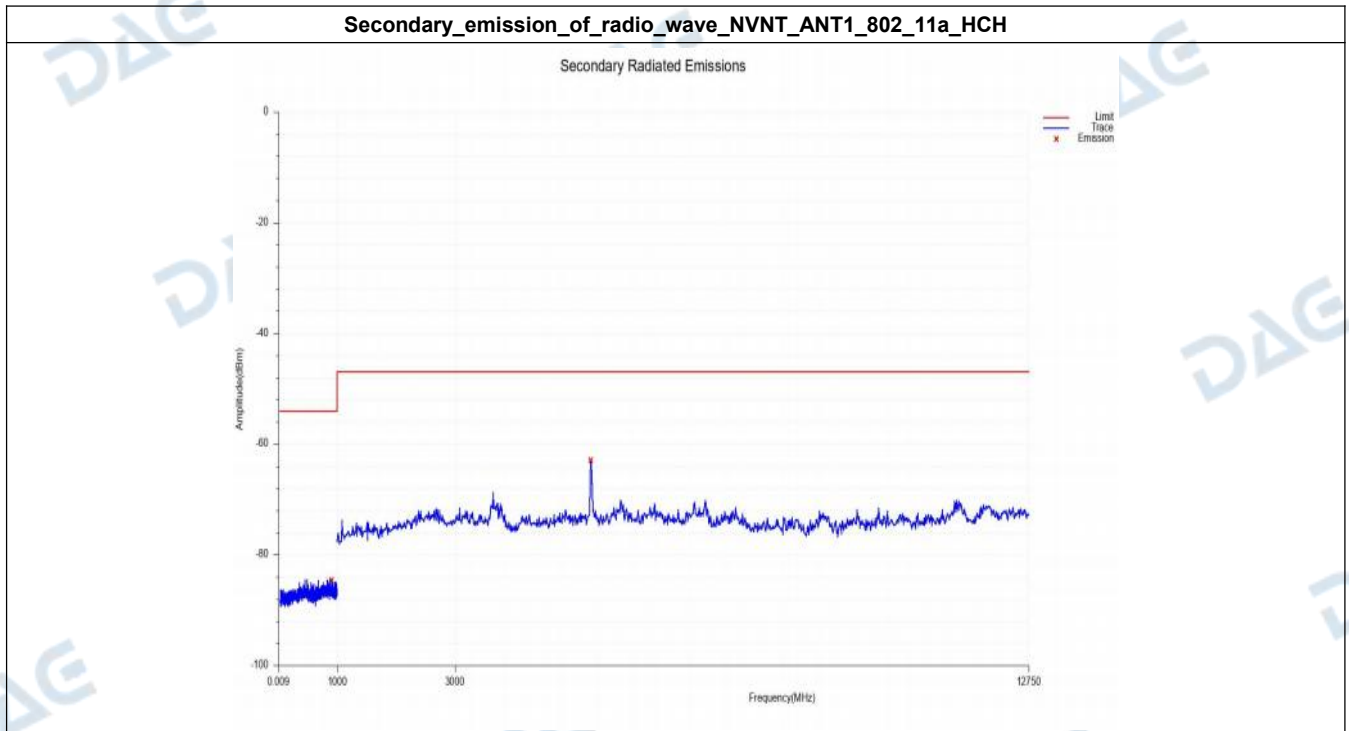


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11n(HT20)_LCH

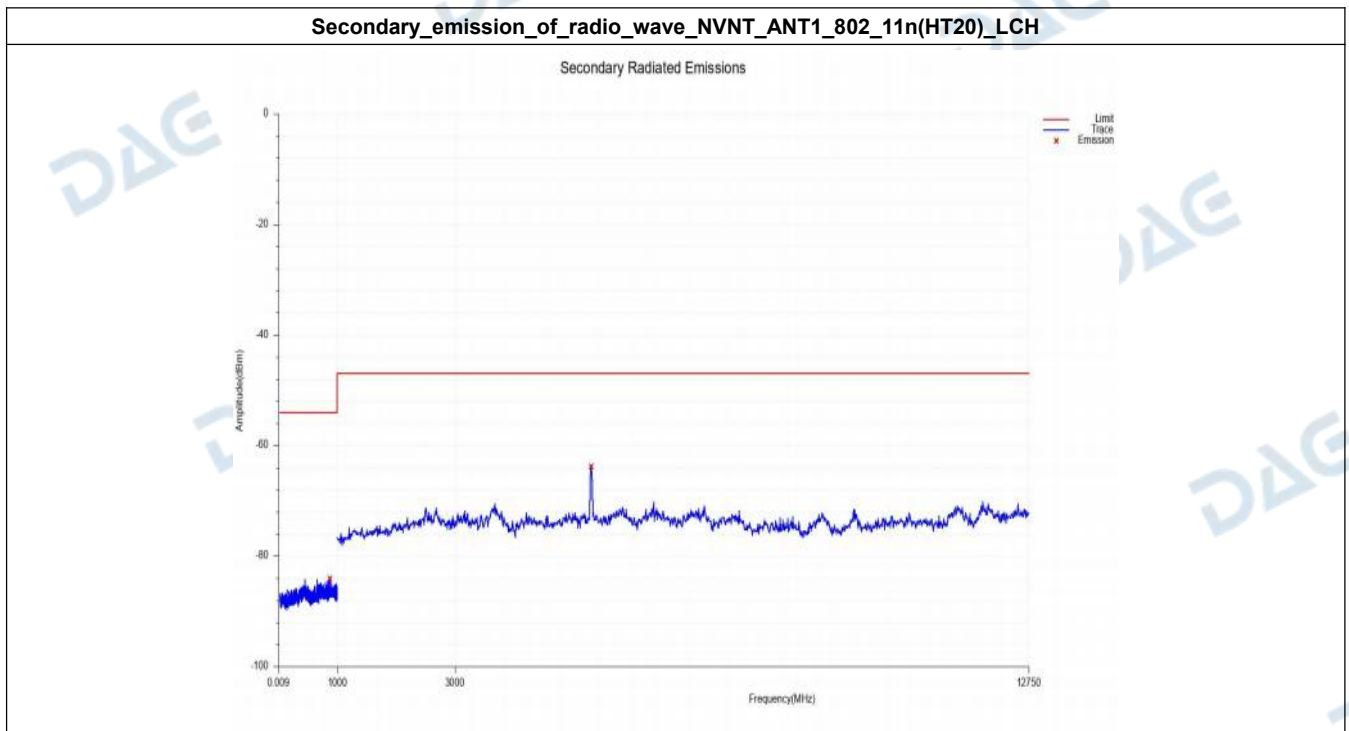


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11n(HT20)_MCH

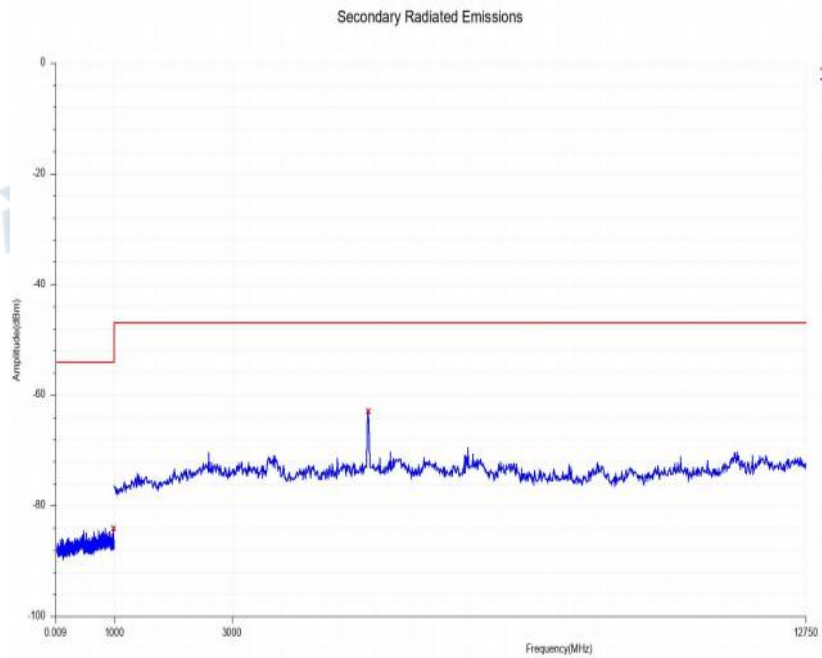


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11n(HT20)_HCH

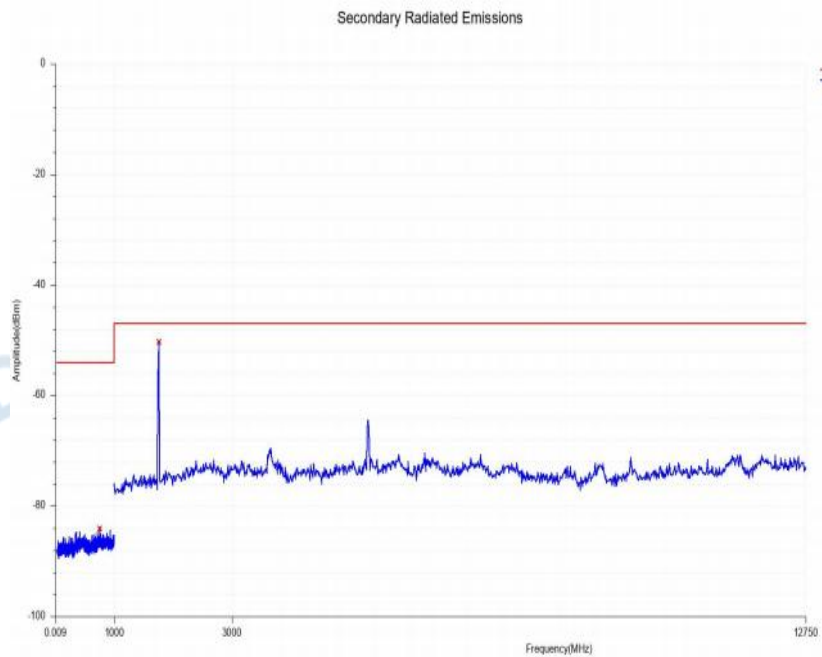


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11ac(VHT20)_LCH

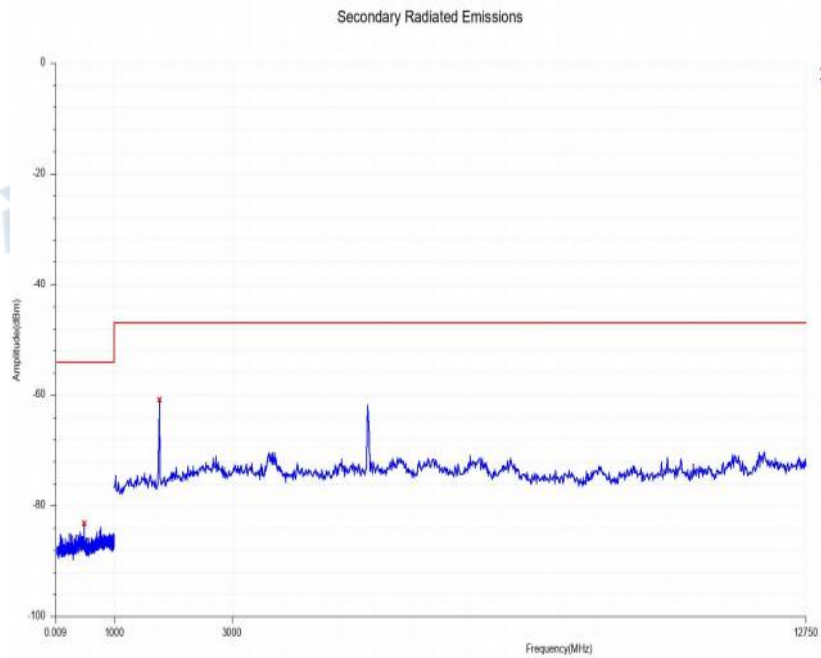


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11ac(VHT20)_MCH

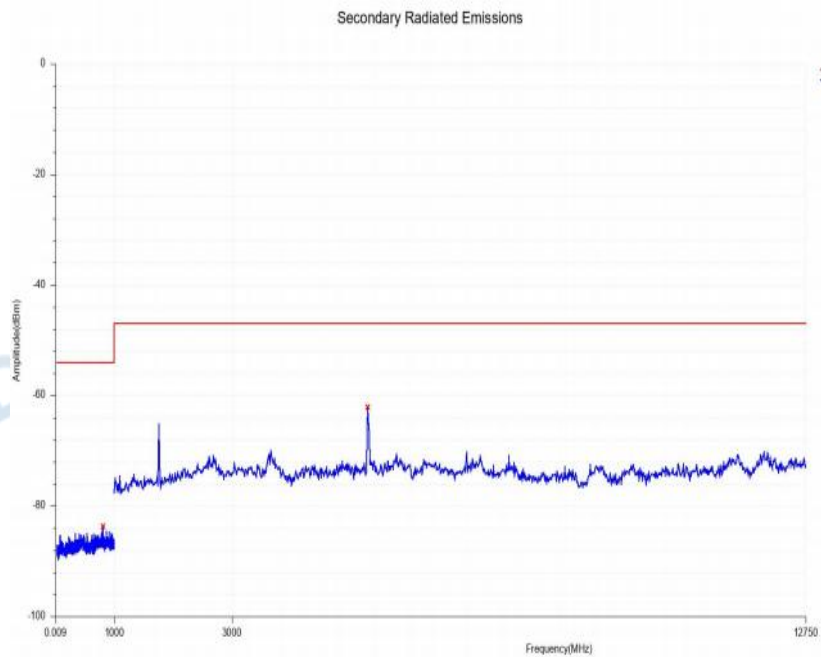


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11ac(VHT20)_HCH

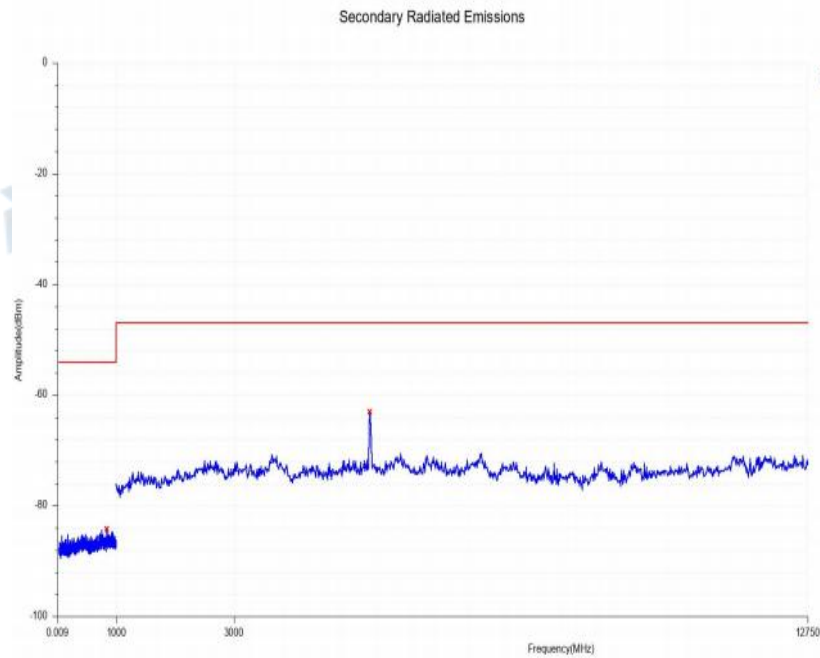


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11n(HT40)_LCH

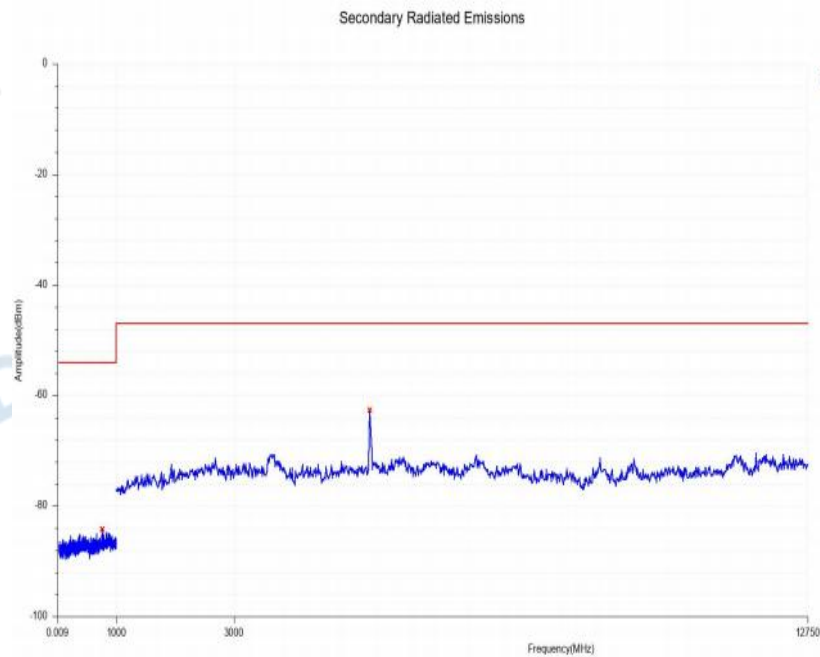


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11n(HT40)_HCH

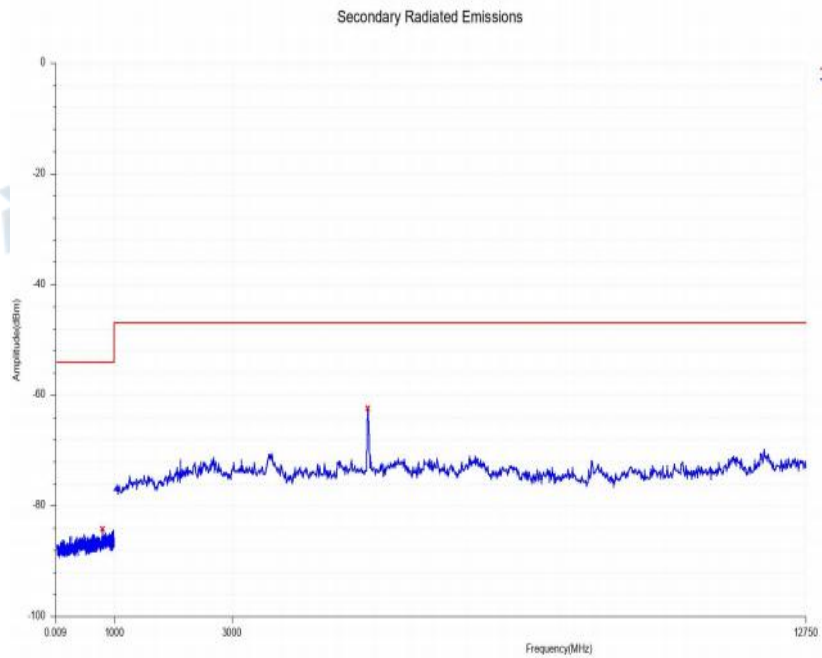


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11ac(VHT40)_LCH

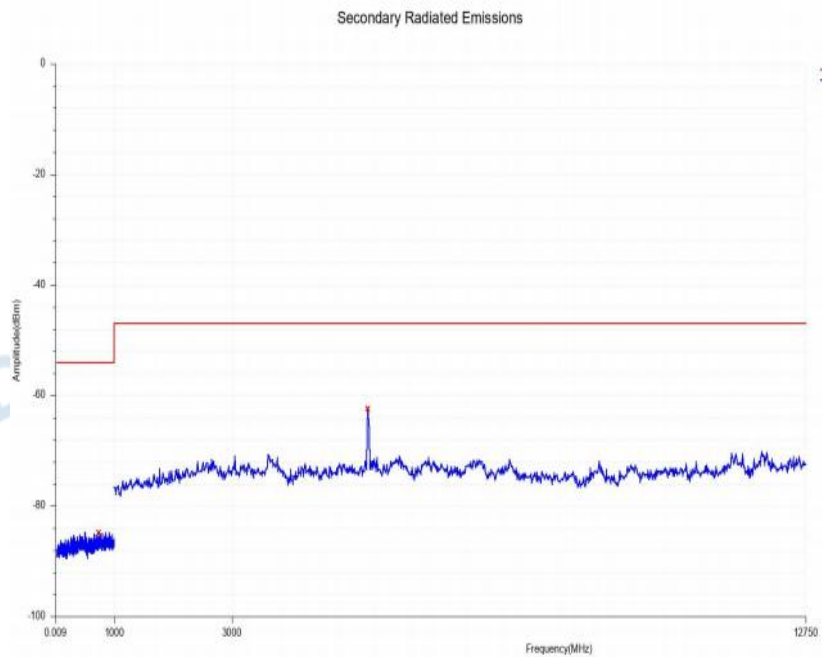

Secondary_emission_of_radio_wave_NVNT_ANT1_802_11ac(VHT40)_HCH

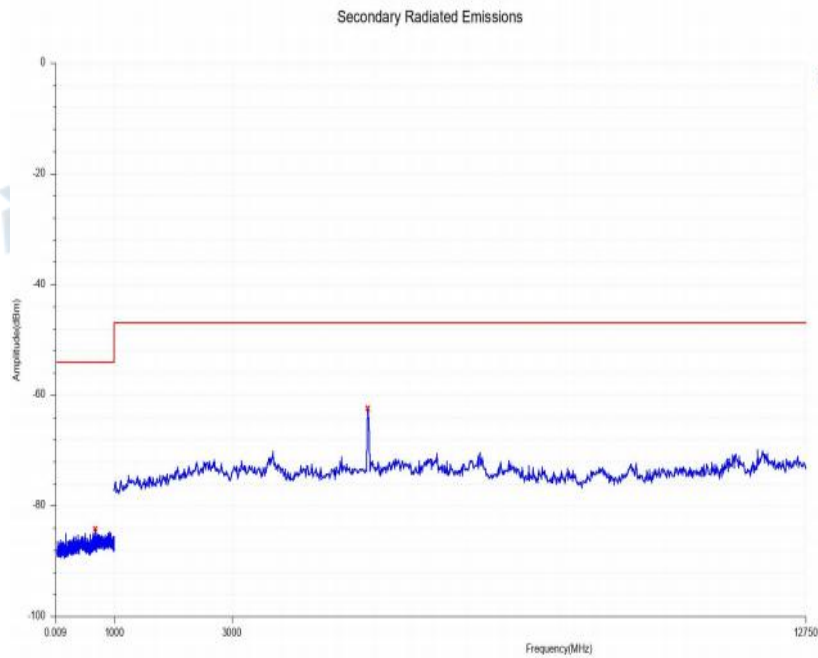

Secondary_emission_of_radio_wave_NVNT_ANT1_802_11ac(VHT80)_MCH

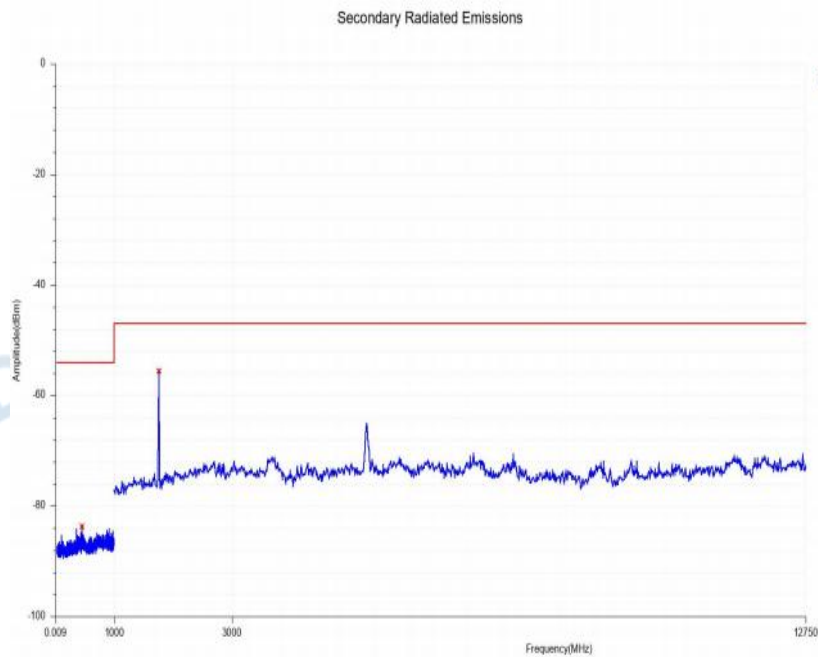

Appendix-5.6g

HT260424005---URX-05--MIC-5.6GWIFI

MIC_5.6G_WIFI (Item_19-3) Test Data

1. Occupied Frequency Bandwidth

Condition	Antenna	Mode	Frequency(MHz)	Occupied Bandwidth(MHz)	Limit(MHz)	Result
NVNT	ANT1	802.11a	5500.00	16.90	20	Pass
NVNT	ANT1	802.11a	5600.00	16.88	20	Pass
NVNT	ANT1	802.11a	5720.00	16.75	20	Pass
NVNT	ANT1	802.11n(HT20)	5500.00	18.04	20	Pass
NVNT	ANT1	802.11n(HT20)	5600.00	18.01	20	Pass
NVNT	ANT1	802.11n(HT20)	5720.00	17.84	20	Pass
NVNT	ANT1	802.11ac(VHT20)	5500.00	18.10	20	Pass
NVNT	ANT1	802.11ac(VHT20)	5600.00	17.98	20	Pass
NVNT	ANT1	802.11ac(VHT20)	5720.00	17.87	20	Pass
NVNT	ANT1	802.11n(HT40)	5510.00	36.16	40	Pass
NVNT	ANT1	802.11n(HT40)	5590.00	36.22	40	Pass
NVNT	ANT1	802.11n(HT40)	5710.00	36.01	40	Pass
NVNT	ANT1	802.11ac(VHT40)	5510.00	36.28	40	Pass
NVNT	ANT1	802.11ac(VHT40)	5590.00	36.23	40	Pass
NVNT	ANT1	802.11ac(VHT40)	5710.00	36.04	40	Pass
NVNT	ANT1	802.11ac(VHT80)	5530.00	75.51	80	Pass
NVNT	ANT1	802.11ac(VHT80)	5610.00	75.44	80	Pass
NVNT	ANT1	802.11ac(VHT80)	5690.00	75.51	80	Pass

Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11a_5500_20M



Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11a_5600_20M



Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11a_5720_20M



Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11n(HT20)_5500_20M



Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11n(HT20)_5600_20M




Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11n(HT20)_5720_20M



Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11ac(VHT20)_5500_20M




Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11ac(VHT20)_5600_20M

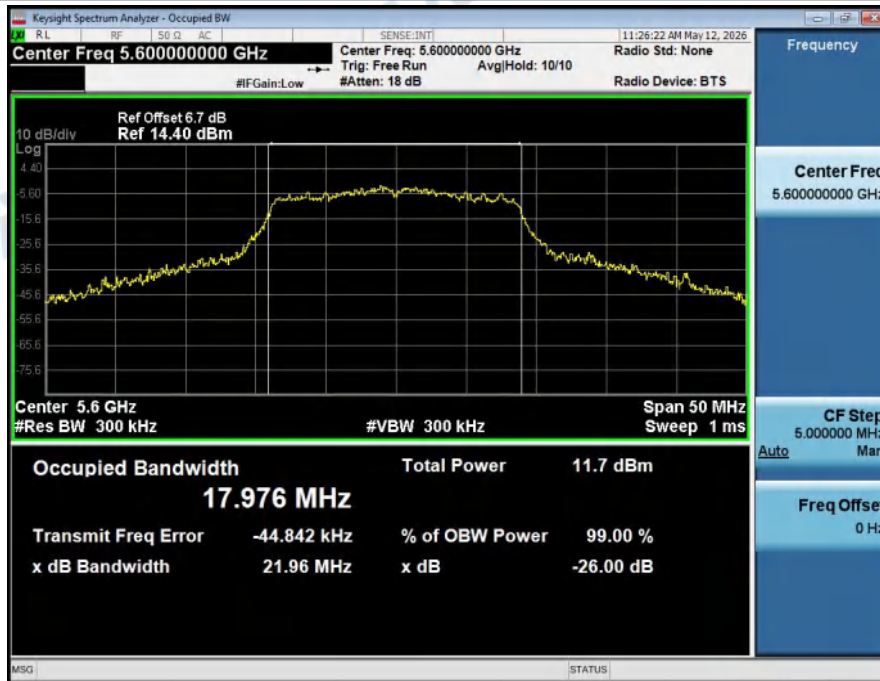

Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11ac(VHT20)_5720_20M




Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11n(HT40)_5510_40M

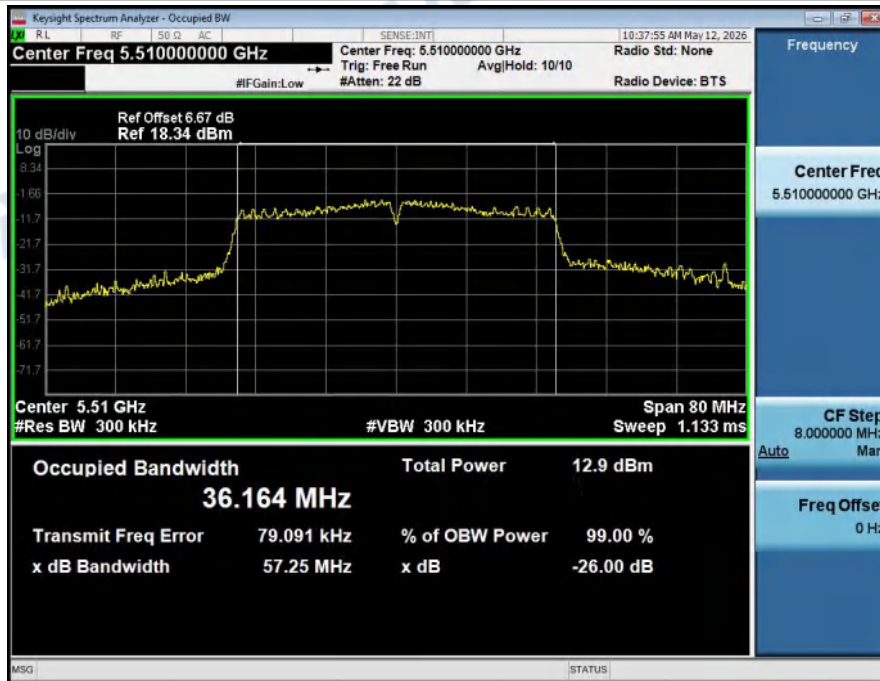

Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11n(HT40)_5590_40M




Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11n(HT40)_5710_40M

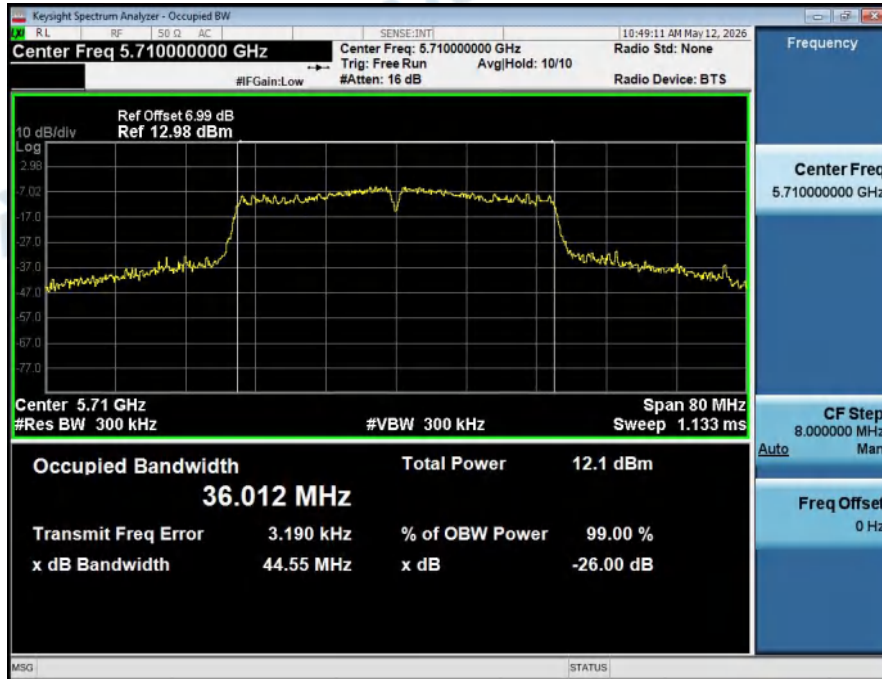

Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11ac(VHT40)_5510_40M




Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11ac(VHT40)_5590_40M

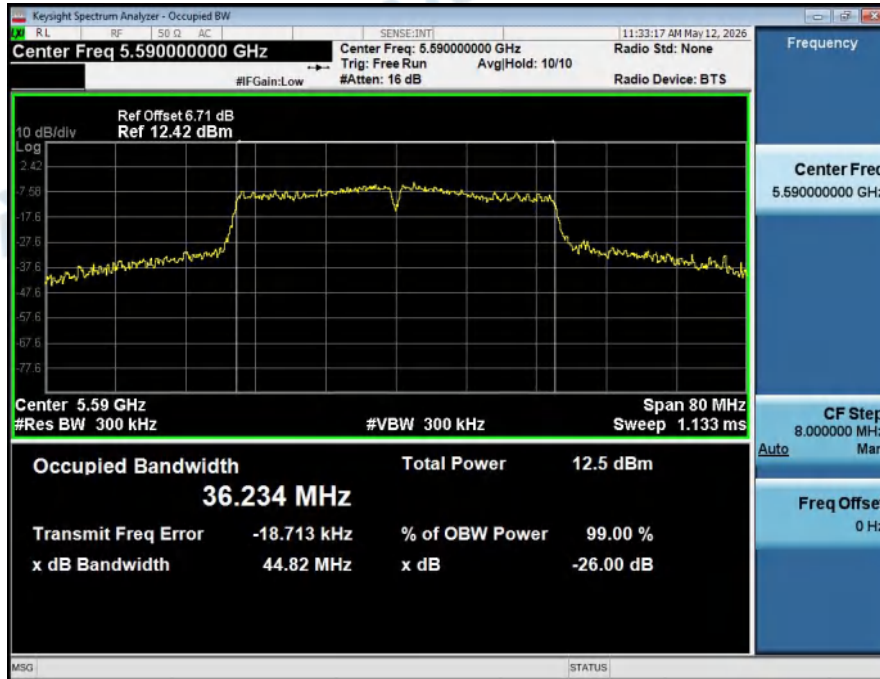


Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11ac(VHT40)_5710_40M




Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11ac(VHT80)_5530_80M

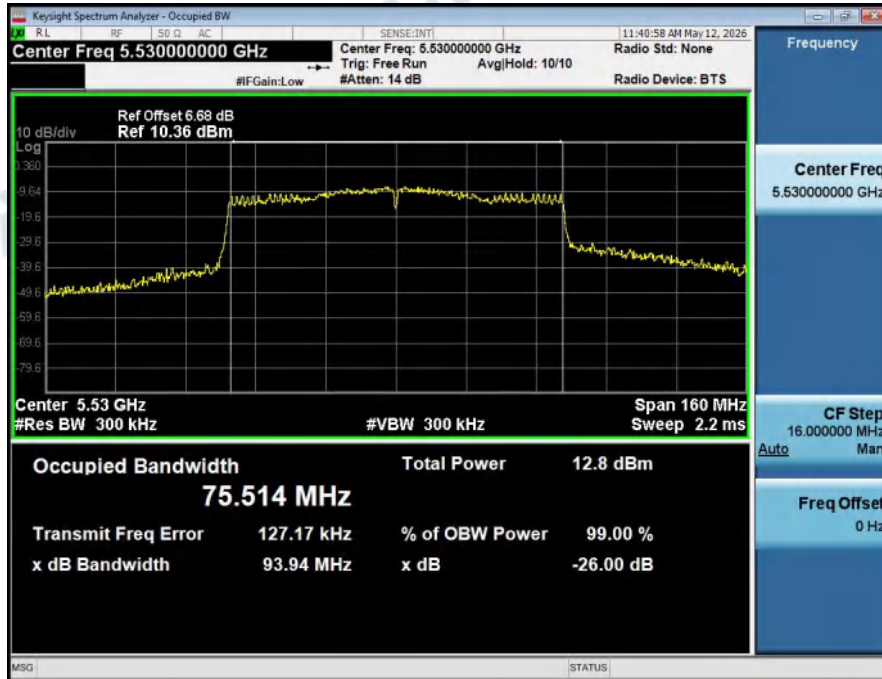

Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11ac(VHT80)_5610_80M

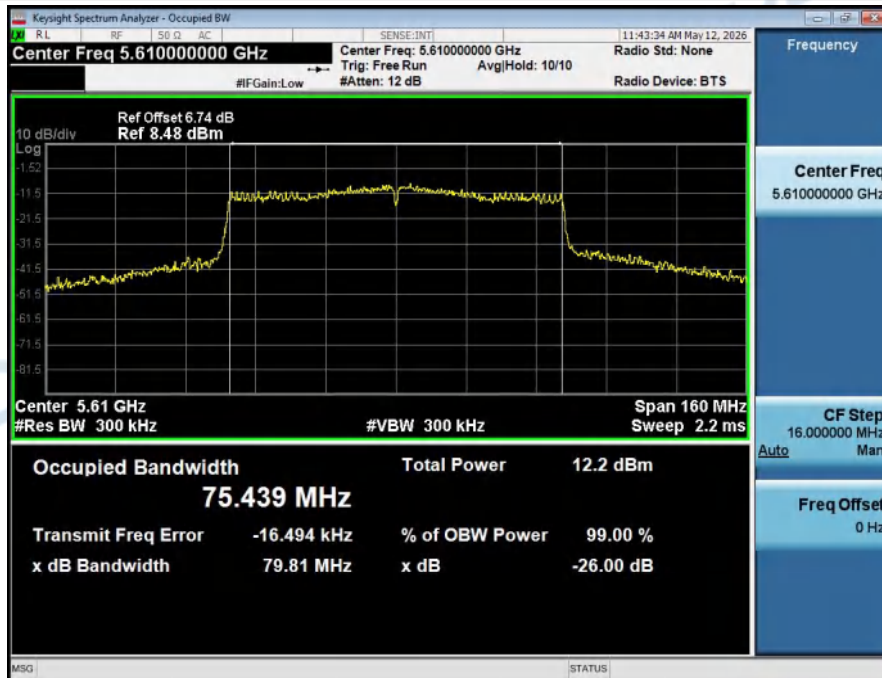

Occupied_Frequency_Bandwidth_NVNT_ANT1_802_11ac(VHT80)_5690_80M

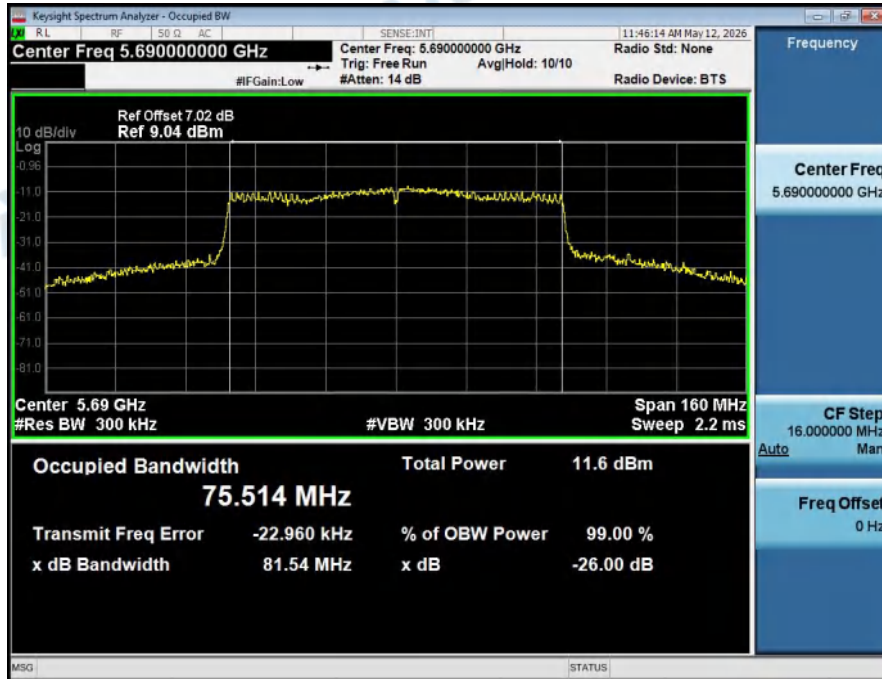

2. Spread Spectrum Bandwidth

Condition	Antenna	Mode	Frequency(MHz)	Spread Spectrum Bandwidth(MHz)
NVNT	ANT1	802.11a	5500.00	14.07
NVNT	ANT1	802.11a	5600.00	14.07
NVNT	ANT1	802.11a	5720.00	13.96
NVNT	ANT1	802.11n(HT20)	5500.00	15.07
NVNT	ANT1	802.11n(HT20)	5600.00	15.12
NVNT	ANT1	802.11n(HT20)	5720.00	14.92
NVNT	ANT1	802.11ac(VHT20)	5500.00	15.08
NVNT	ANT1	802.11ac(VHT20)	5600.00	15.11
NVNT	ANT1	802.11ac(VHT20)	5720.00	14.99
NVNT	ANT1	802.11n(HT40)	5510.00	30.61
NVNT	ANT1	802.11n(HT40)	5590.00	31.16
NVNT	ANT1	802.11n(HT40)	5710.00	30.92
NVNT	ANT1	802.11ac(VHT40)	5510.00	30.94
NVNT	ANT1	802.11ac(VHT40)	5590.00	31.37
NVNT	ANT1	802.11ac(VHT40)	5710.00	31.05
NVNT	ANT1	802.11ac(VHT80)	5530.00	64.64
NVNT	ANT1	802.11ac(VHT80)	5610.00	65.74
NVNT	ANT1	802.11ac(VHT80)	5690.00	66.66

Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11a_5500




Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11a_5600



Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11a_5720




Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11n(HT20)_5500

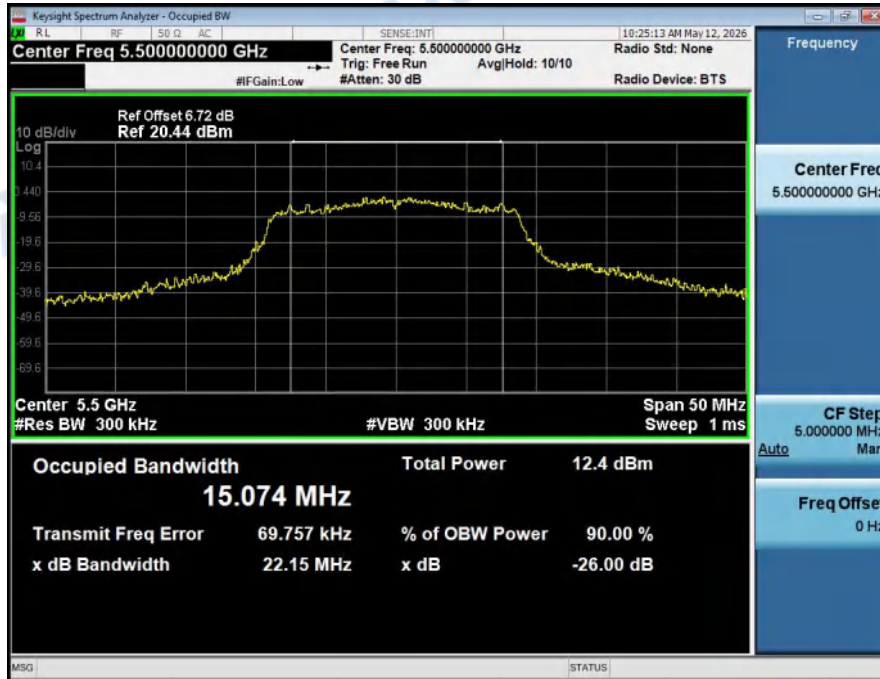

Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11n(HT20)_5600




Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11n(HT20)_5720

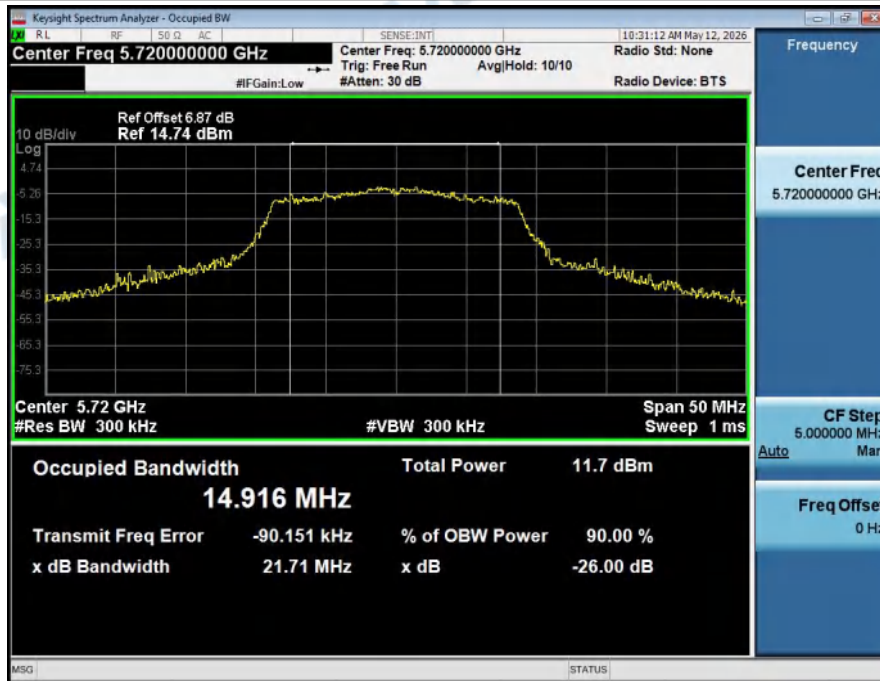

Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11ac(VHT20)_5500



Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11ac(VHT20)_5600

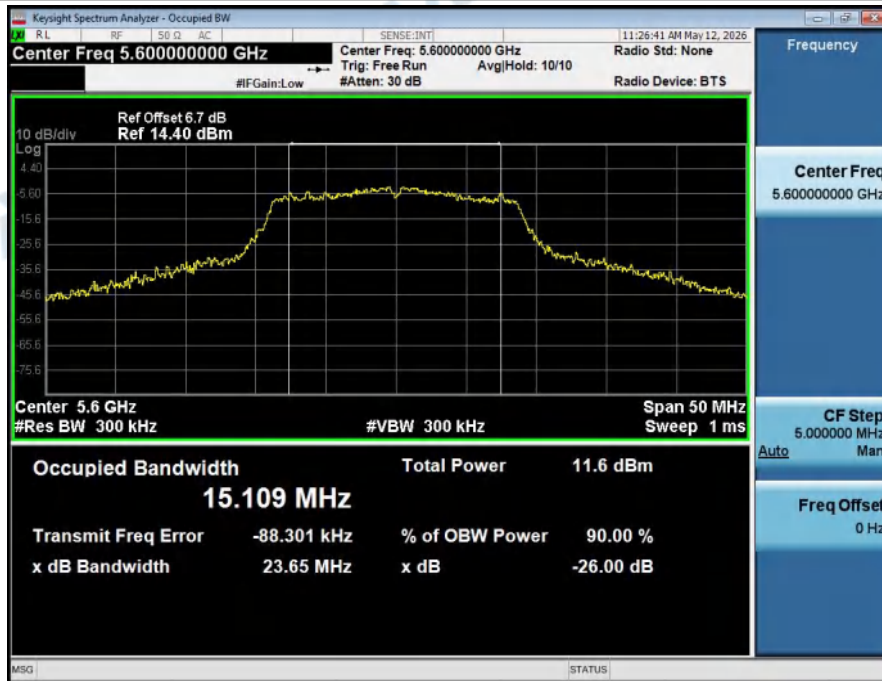


Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11ac(VHT20)_5720



Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11n(HT40)_5510



Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11n(HT40)_5590

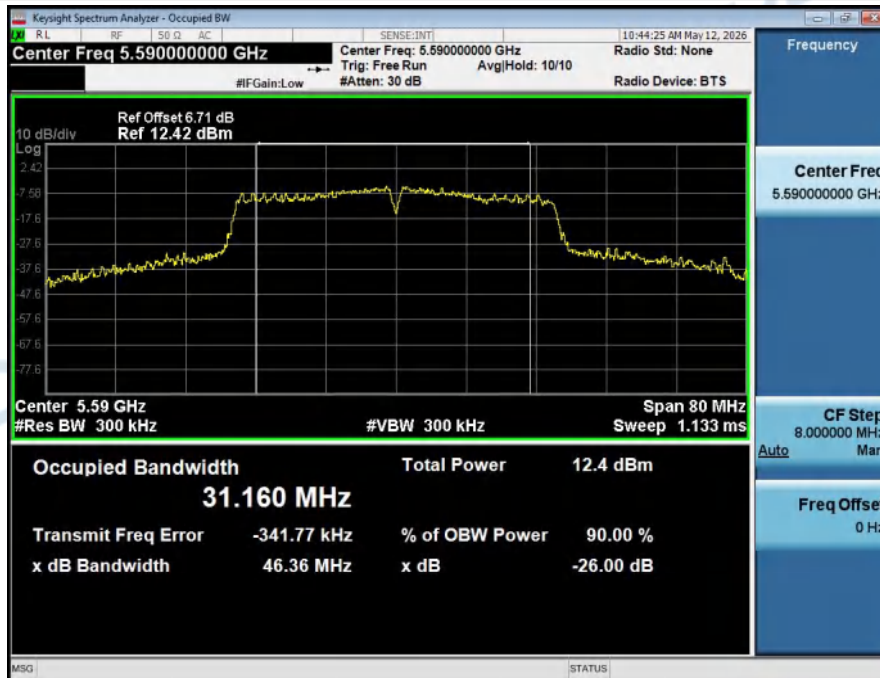

Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11n(HT40)_5710



Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11ac(VHT40)_5510



Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11ac(VHT40)_5590



Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11ac(VHT40)_5710



Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11ac(VHT80)_5530



Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11ac(VHT80)_5610




Spread_Spectrum_Bandwidth_NVNT_ANT1_802_11ac(VHT80)_5690




3. Burst Length

Condition	Antenna	Mode	Frequency	Burst_Length(ms)	Limit(ms)	Result
NVNT	ANT1	802.11a	5500.00	1.390	8	Pass
NVNT	ANT1	802.11a	5600.00	1.400	8	Pass
NVNT	ANT1	802.11a	5720.00	1.390	8	Pass
NVNT	ANT1	802.11n(HT20)	5500.00	1.310	8	Pass
NVNT	ANT1	802.11n(HT20)	5600.00	1.310	8	Pass
NVNT	ANT1	802.11n(HT20)	5720.00	1.310	8	Pass
NVNT	ANT1	802.11ac(VHT20)	5500.00	1.400	8	Pass
NVNT	ANT1	802.11ac(VHT20)	5600.00	1.400	8	Pass
NVNT	ANT1	802.11ac(VHT20)	5720.00	1.320	8	Pass
NVNT	ANT1	802.11n(HT40)	5510.00	0.640	8	Pass
NVNT	ANT1	802.11n(HT40)	5590.00	0.640	8	Pass
NVNT	ANT1	802.11n(HT40)	5710.00	0.650	8	Pass
NVNT	ANT1	802.11ac(VHT40)	5510.00	0.660	8	Pass
NVNT	ANT1	802.11ac(VHT40)	5590.00	0.660	8	Pass
NVNT	ANT1	802.11ac(VHT40)	5710.00	0.650	8	Pass
NVNT	ANT1	802.11ac(VHT80)	5530.00	0.320	8	Pass
NVNT	ANT1	802.11ac(VHT80)	5610.00	0.320	8	Pass
NVNT	ANT1	802.11ac(VHT80)	5690.00	0.320	8	Pass


Burst_Length_NVNT_ANT1_802_11a_5500_20M

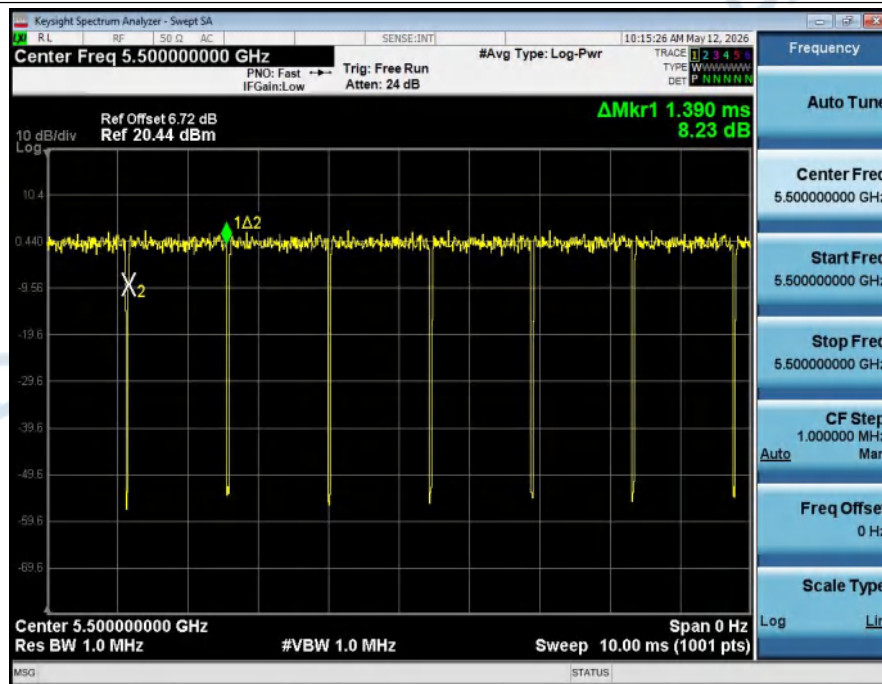


Burst_Length_NVNT_ANT1_802_11a_5600_20M

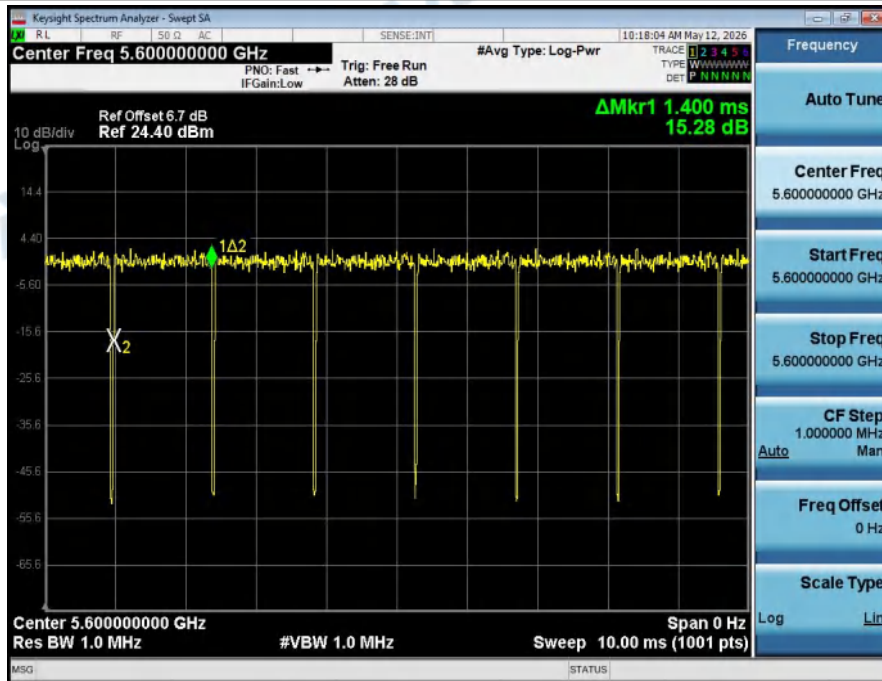


Burst_Length_NVNT_ANT1_802_11a_5720_20M

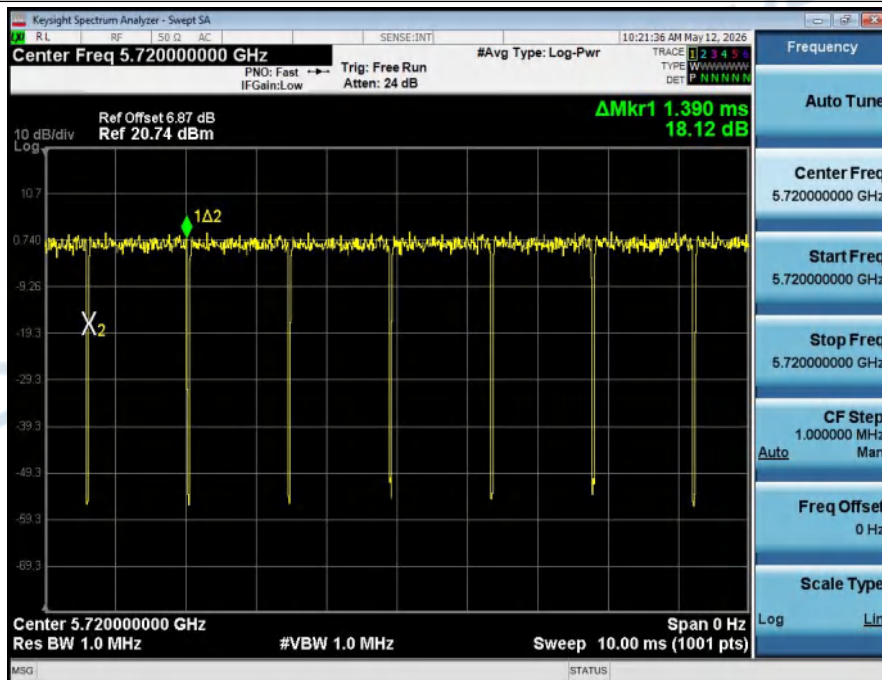


Burst_Length_NVNT_ANT1_802_11n(HT20)_5500_20M

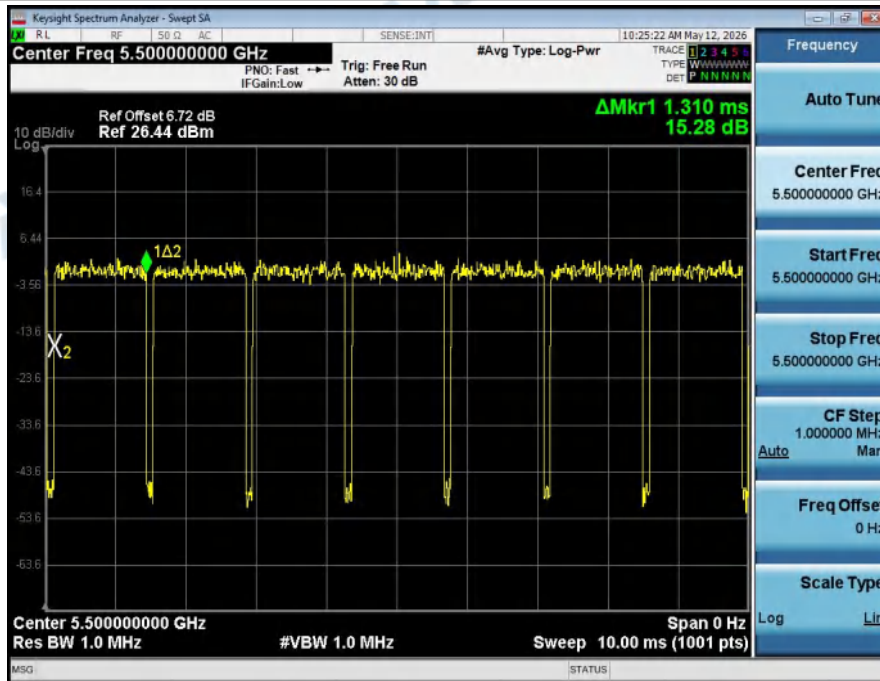


Burst_Length_NVNT_ANT1_802_11n(HT20)_5600_20M

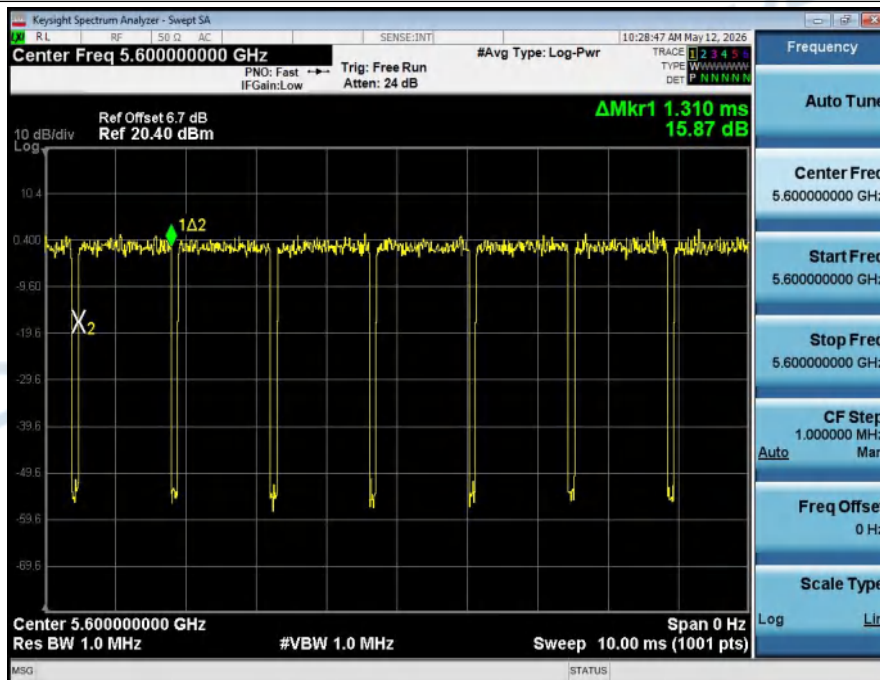


Burst_Length_NVNT_ANT1_802_11n(HT20)_5720_20M

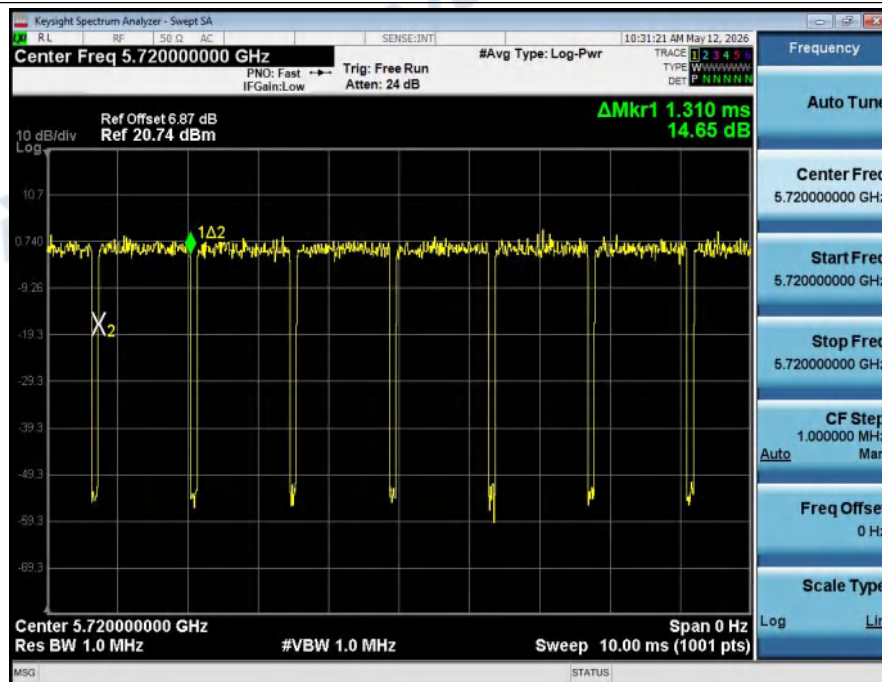


Burst_Length_NVNT_ANT1_802_11ac(VHT20)_5500_20M

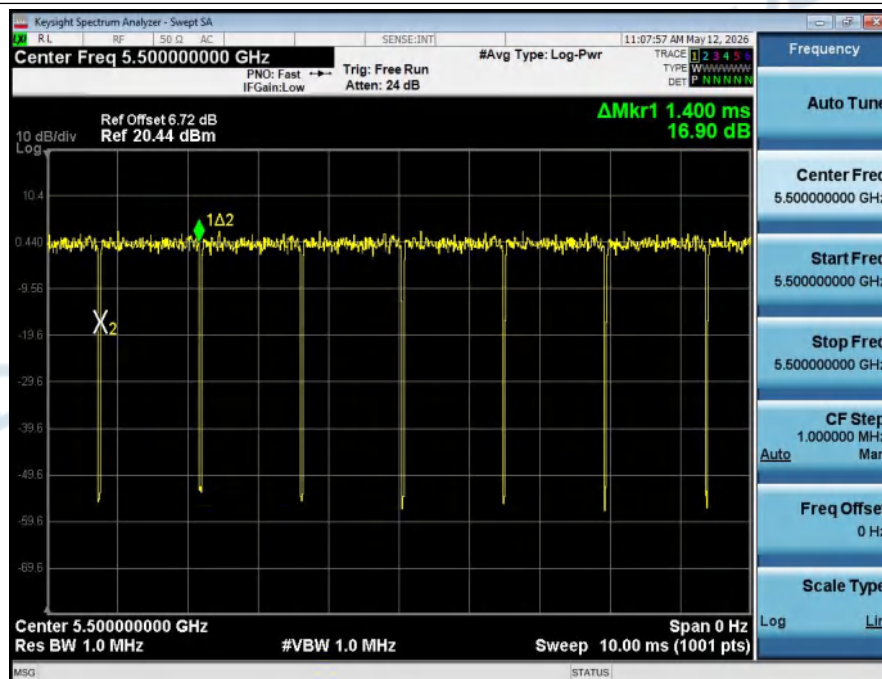


Burst_Length_NVNT_ANT1_802_11ac(VHT20)_5600_20M

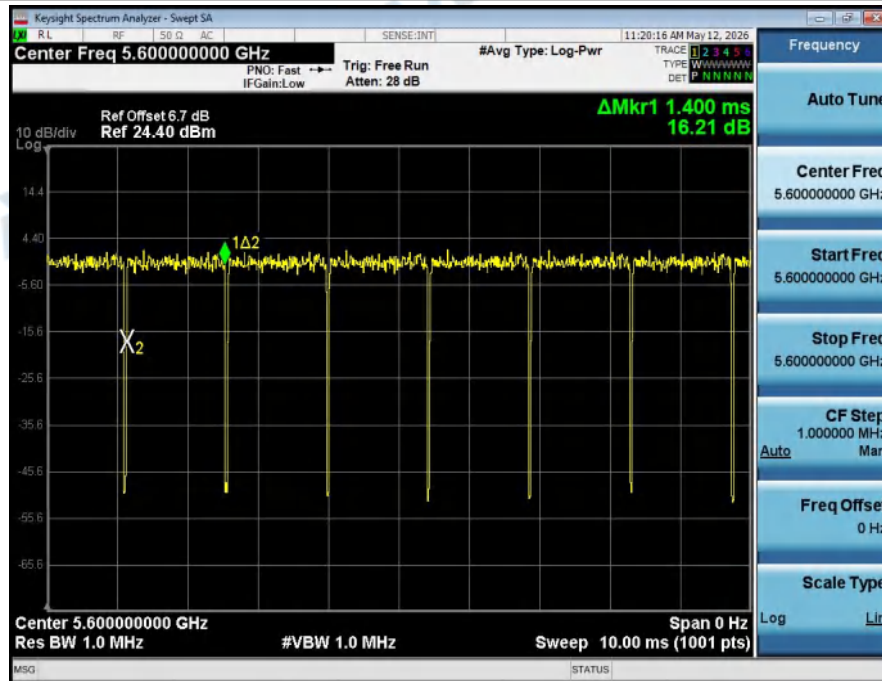


Burst_Length_NVNT_ANT1_802_11ac(VHT20)_5720_20M

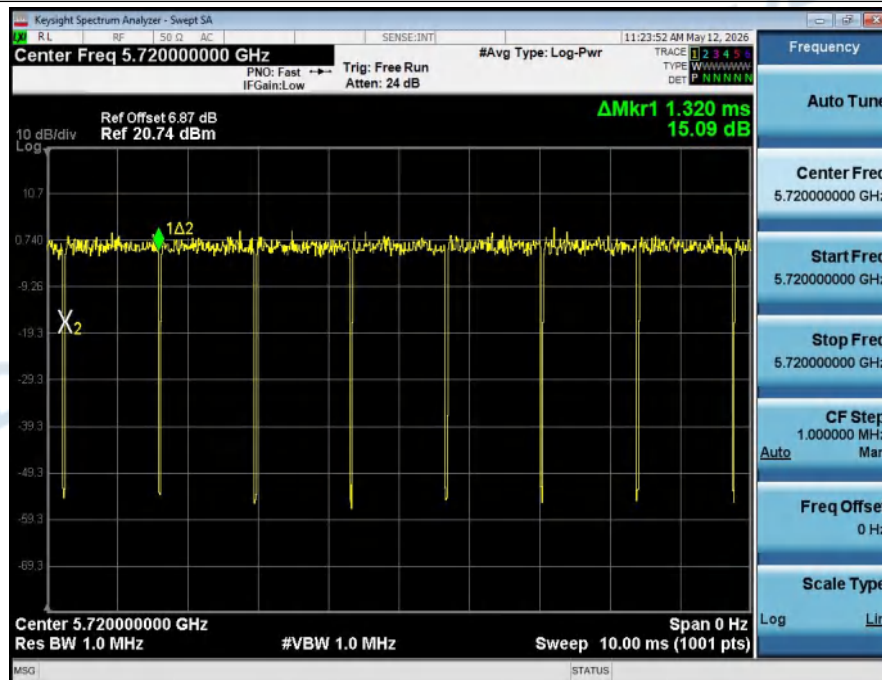


Burst_Length_NVNT_ANT1_802_11n(HT40)_5510_40M

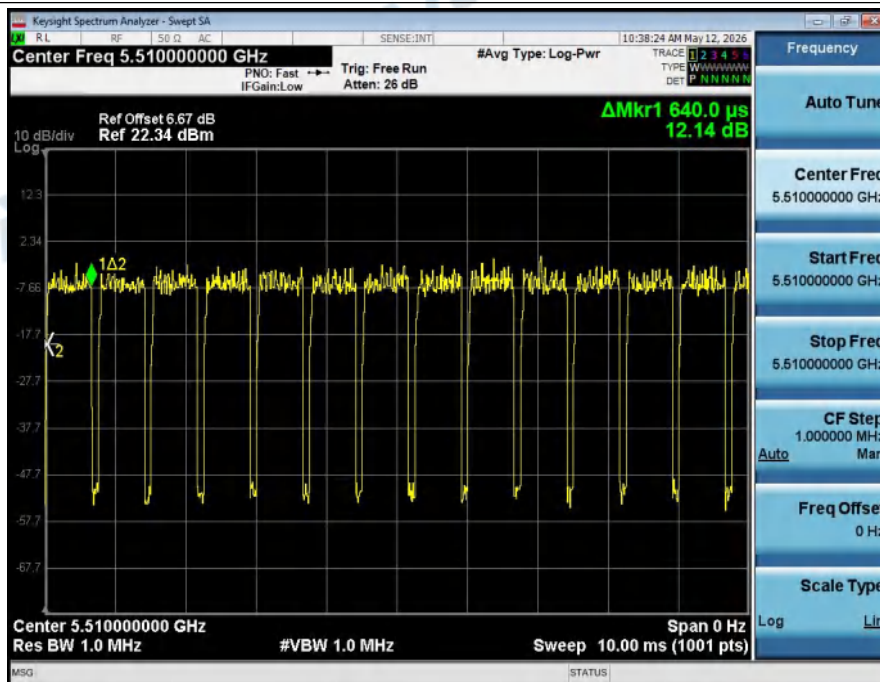


Burst_Length_NVNT_ANT1_802_11n(HT40)_5590_40M

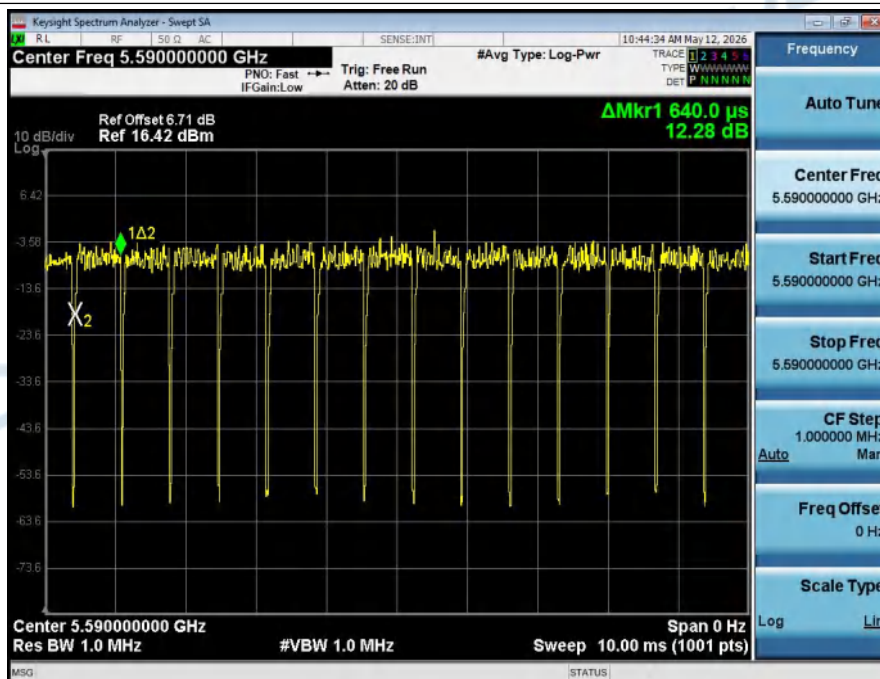


Burst_Length_NVNT_ANT1_802_11n(HT40)_5710_40M

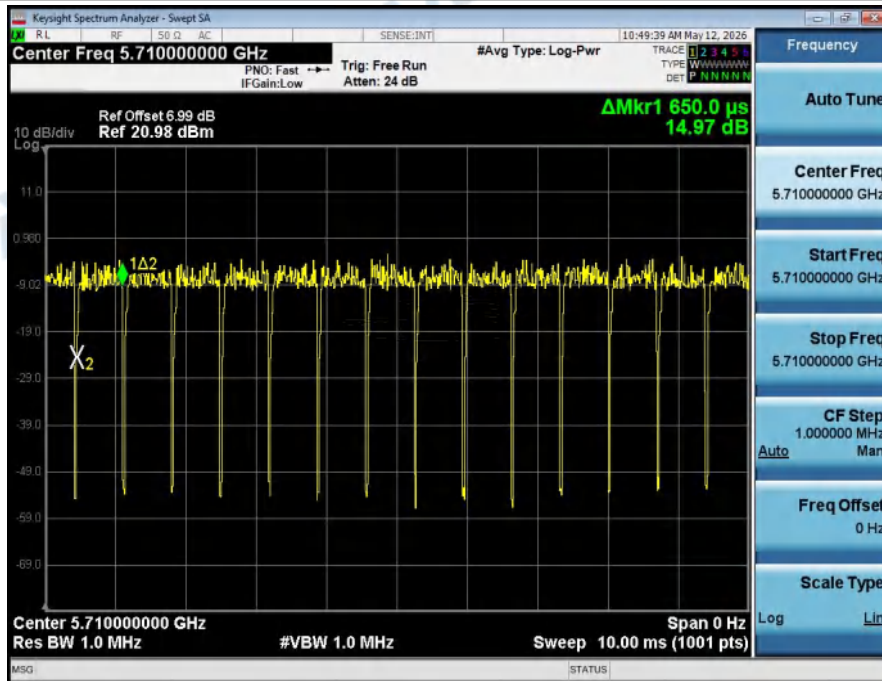


Burst_Length_NVNT_ANT1_802_11ac(VHT40)_5510_40M

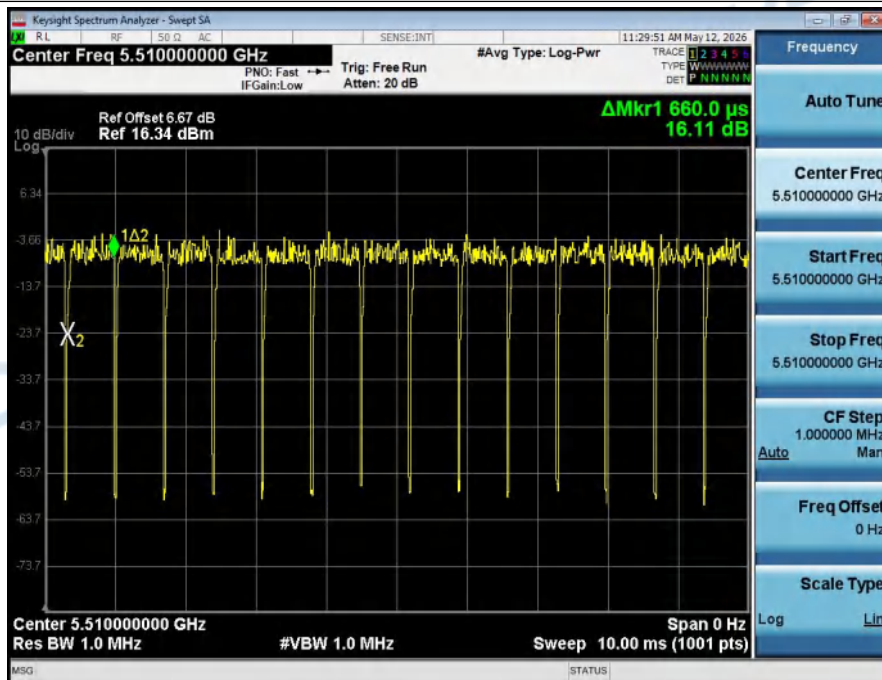


Burst_Length_NVNT_ANT1_802_11ac(VHT40)_5590_40M

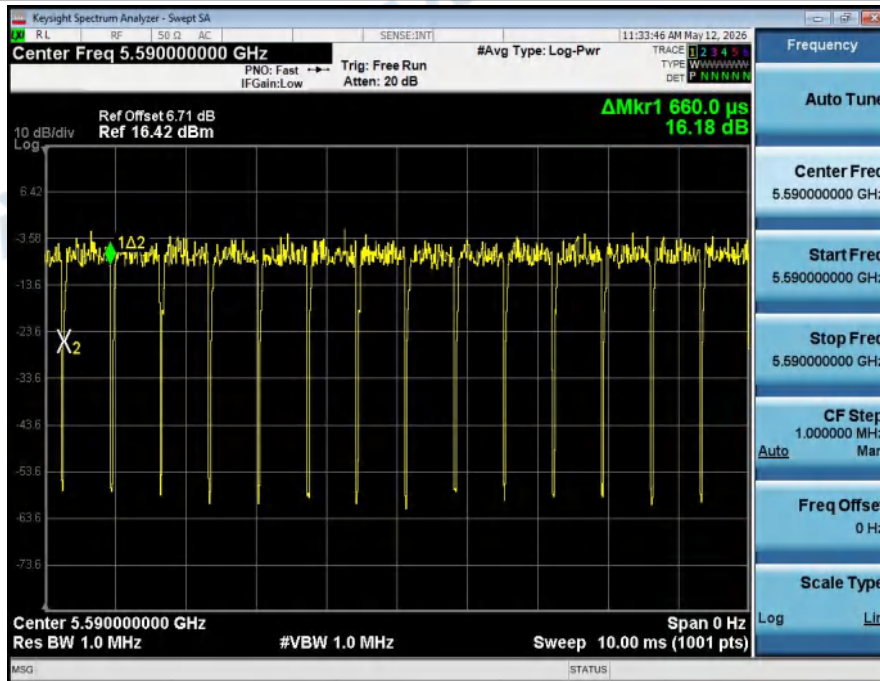


Burst_Length_NVNT_ANT1_802_11ac(VHT40)_5710_40M

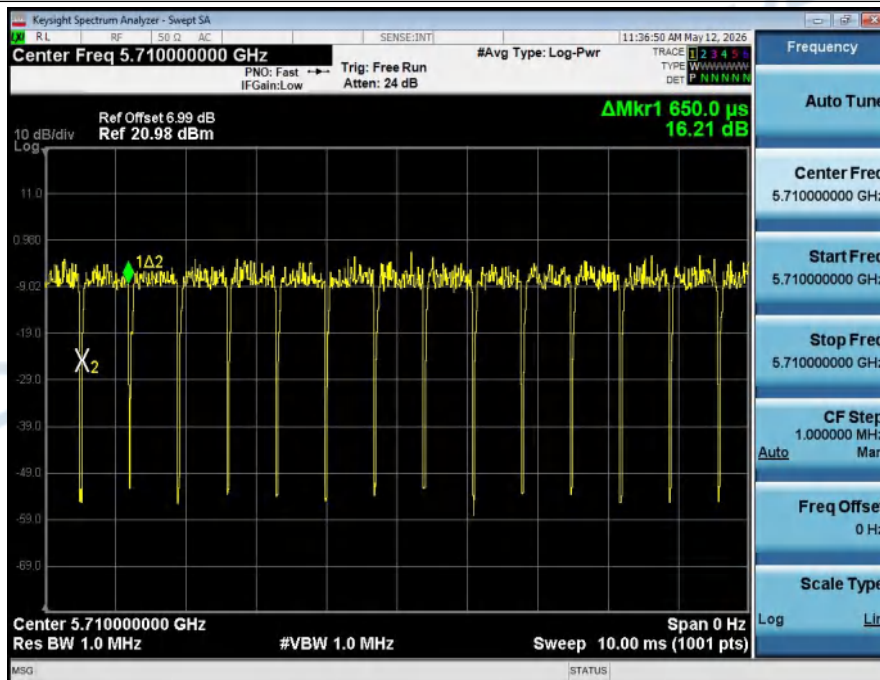


Burst_Length_NVNT_ANT1_802_11ac(VHT80)_5530_80M

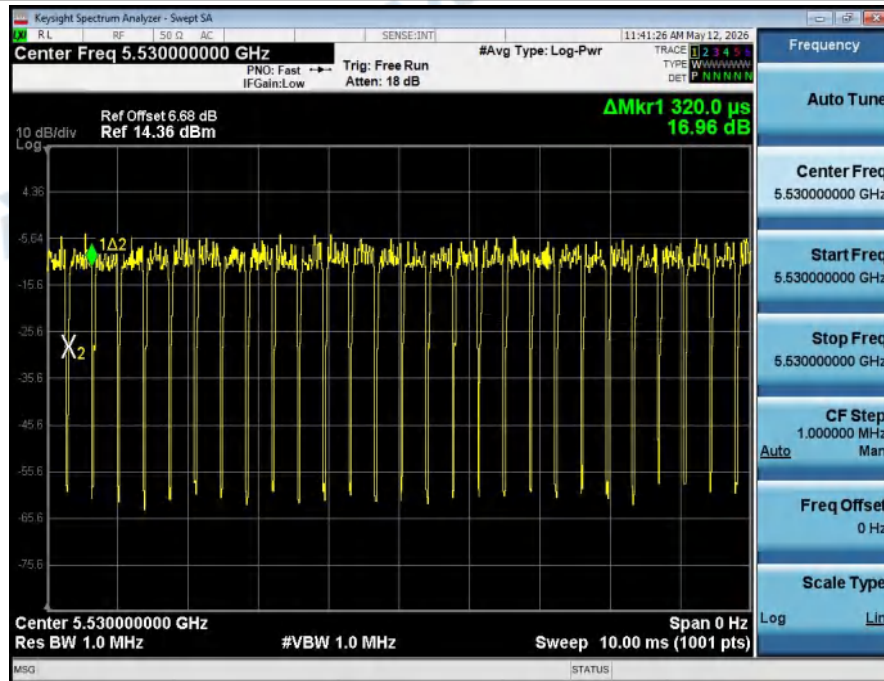

Burst_Length_NVNT_ANT1_802_11ac(VHT80)_5610_80M

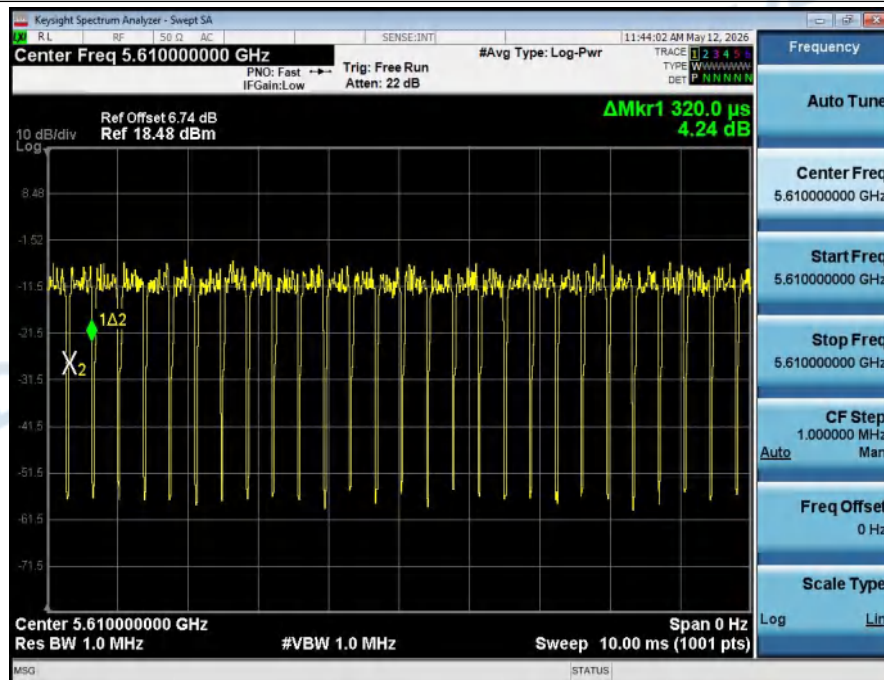

Burst_Length_NVNT_ANT1_802_11ac(VHT80)_5690_80M

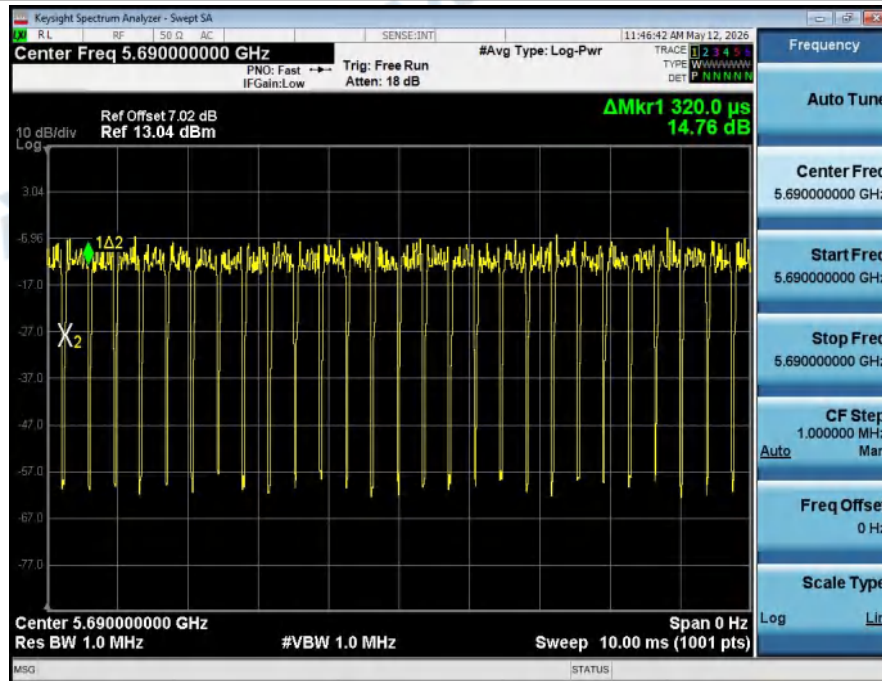

4. RF output power & E.I.R.P(Without TPC)

Condition	Antenna	Mode	Frequency	Measured Power (dBm)	Antenna Power (mW/MHz)	Rated Power (mW/MHz)	Power Limit (mW/MHz)	Power Tolerance(%)	Tolerance Limit(%)	Result
NVNT	ANT1	802.11a	5500.00	-5.89	0.26	0.2	10.00	30.00	-50~+50	Pass
NVNT	ANT1	802.11a	5600.00	-6.19	0.24	0.2	10.00	20.00	-50~+50	Pass
NVNT	ANT1	802.11a	5720.00	-5.76	0.27	0.2	10.00	35.00	-50~+50	Pass
NVNT	ANT1	802.11n(HT20)	5500.00	-6.61	0.22	0.2	10.00	10.00	-50~+50	Pass
NVNT	ANT1	802.11n(HT20)	5600.00	-6.92	0.2	0.2	10.00	0.00	-50~+50	Pass
NVNT	ANT1	802.11n(HT20)	5720.00	-6.57	0.22	0.2	10.00	10.00	-50~+50	Pass
NVNT	ANT1	802.11ac(VHT20)	5500.00	-5.86	0.26	0.2	10.00	30.00	-50~+50	Pass
NVNT	ANT1	802.11ac(VHT20)	5600.00	-6.72	0.21	0.2	10.00	5.00	-50~+50	Pass
NVNT	ANT1	802.11ac(VHT20)	5720.00	-6.49	0.22	0.2	10.00	10.00	-50~+50	Pass
NVNT	ANT1	802.11n(HT40)	5510.00	-7.46	0.18	0.2	5.00	-10.00	-50~+50	Pass
NVNT	ANT1	802.11n(HT40)	5590.00	-8.53	0.14	0.2	5.00	-30.00	-50~+50	Pass
NVNT	ANT1	802.11n(HT40)	5710.00	-8.91	0.13	0.2	5.00	-35.00	-50~+50	Pass
NVNT	ANT1	802.11ac(VHT40)	5510.00	-7.76	0.17	0.2	5.00	-15.00	-50~+50	Pass
NVNT	ANT1	802.11ac(VHT40)	5590.00	-8.58	0.14	0.2	5.00	-30.00	-50~+50	Pass
NVNT	ANT1	802.11ac(VHT40)	5710.00	-8.75	0.13	0.2	5.00	-35.00	-50~+50	Pass
NVNT	ANT1	802.11ac(VHT80)	5530.00	-12.37	0.06	0.05	2.50	20.00	-50~+50	Pass
NVNT	ANT1	802.11ac(VHT80)	5610.00	-12.11	0.06	0.05	2.50	20.00	-50~+50	Pass
NVNT	ANT1	802.11ac(VHT80)	5690.00	-12.60	0.05	0.05	2.50	0.00	-50~+50	Pass

Condition	Antenna	Mode	Frequency	Measured Power(dBm/MHz)	Antenna Gain(dBi)	EIRP(mW/MHz)	EIRP Limit(mW/MHz)	Result
NVNT	ANT1	802.11a	5500.00	-5.89	2.05	-3.84	10.00	Pass
NVNT	ANT1	802.11a	5600.00	-6.19	2.05	-4.14	10.00	Pass
NVNT	ANT1	802.11a	5720.00	-5.76	2.05	-3.71	10.00	Pass
NVNT	ANT1	802.11n(HT20)	5500.00	-6.61	2.05	-4.56	10.00	Pass
NVNT	ANT1	802.11n(HT20)	5600.00	-6.92	2.05	-4.87	10.00	Pass
NVNT	ANT1	802.11n(HT20)	5720.00	-6.57	2.05	-4.52	10.00	Pass
NVNT	ANT1	802.11ac(VHT20)	5500.00	-5.86	2.05	-3.81	10.00	Pass
NVNT	ANT1	802.11ac(VHT20)	5600.00	-6.72	2.05	-4.67	10.00	Pass
NVNT	ANT1	802.11ac(VHT20)	5720.00	-6.49	2.05	-4.44	10.00	Pass
NVNT	ANT1	802.11n(HT40)	5510.00	-7.46	2.05	-5.41	5.00	Pass
NVNT	ANT1	802.11n(HT40)	5590.00	-8.53	2.05	-6.48	5.00	Pass
NVNT	ANT1	802.11n(HT40)	5710.00	-8.91	2.05	-6.86	5.00	Pass
NVNT	ANT1	802.11ac(VHT40)	5510.00	-7.76	2.05	-5.71	5.00	Pass
NVNT	ANT1	802.11ac(VHT40)	5590.00	-8.58	2.05	-6.53	5.00	Pass
NVNT	ANT1	802.11ac(VHT40)	5710.00	-8.75	2.05	-6.7	5.00	Pass
NVNT	ANT1	802.11ac(VHT80)	5530.00	-12.37	2.05	-10.32	2.50	Pass
NVNT	ANT1	802.11ac(VHT80)	5610.00	-12.11	2.05	-10.06	2.50	Pass
NVNT	ANT1	802.11ac(VHT80)	5690.00	-12.6	2.05	-10.55	2.50	Pass

5. Spurious Emissions

Condition	Mode	TX Freq.(MHz)	Freq Range (MHz)	Spur. Freq. (MHz)	Amplitude (dBm/MHz)	Gain (dBi)	EIRP (dBm/MHz)	Limit (dBm/MHz)	Spur. Level	Limit	Result
NVNT	802.11a	5500	5400.0~5460.0	5459.2	-42.84	20.5	-40.79	-26	0.0520μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5500	5460.0~5470.0	5466.32	-37.37	20.5	-35.32	-19	0.1830μW/MHz	12.5μW/MHz	Pass
NVNT	802.11a	5500	5745.0~5765.0	5745.6	-47.45	20.5	-45.4	-19	0.0179μW/MHz	12.5μW/MHz	Pass
NVNT	802.11a	5500	5765.0~5800.0	5794.88	-46.21	20.5	-44.16	-26	0.0239μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5500	30.0~5400.0	3613.218	-45.7	20.5	-43.65	-26	0.0269μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5500	5800.0~10000.0	6464.638	-45.18	20.5	-43.13	-26	0.0303μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5500	10000.0~26000.0	25108.8	-46.14	20.5	-44.09	-26	0.0243μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5600	5400.0~5460.0	5411	-47.98	20.5	-45.93	-26	0.0159μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5600	5460.0~5470.0	5463.04	-48.78	20.5	-46.73	-19	0.0132μW/MHz	12.5μW/MHz	Pass
NVNT	802.11a	5600	5745.0~5765.0	5762.24	-47.83	20.5	-45.78	-19	0.0164μW/MHz	12.5μW/MHz	Pass
NVNT	802.11a	5600	5765.0~5800.0	5784.32	-46.88	20.5	-44.83	-26	0.0205μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5600	30.0~5400.0	1753.813	-37.57	20.5	-35.52	-26	0.1751μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5600	5800.0~10000.0	7857.447	-45.31	20.5	-43.26	-26	0.0294μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5600	10000.0~26000.0	24955.2	-46.73	20.5	-44.68	-26	0.0212μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5720	5400.0~5460.0	5403.08	-48.1	20.5	-46.05	-26	0.0154μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5720	5460.0~5470.0	5468.44	-48.99	20.5	-46.94	-19	0.0126μW/MHz	12.5μW/MHz	Pass
NVNT	802.11a	5720	5745.0~5765.0	5748.08	-40.02	20.5	-37.97	-19	0.0996μW/MHz	12.5μW/MHz	Pass
NVNT	802.11a	5720	5765.0~5800.0	5765.24	-46.16	20.5	-44.11	-26	0.0242μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5720	30.0~5400.0	1746.834	-36.56	20.5	-34.51	-26	0.2206μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5720	5800.0~10000.0	5832.54	-44.75	20.5	-42.7	-26	0.0335μW/MHz	2.5μW/MHz	Pass
NVNT	802.11a	5720	10000.0~26000.0	25009.6	-45.8	20.5	-43.75	-26	0.0262μW/MHz	2.5μW/MHz	Pass
NVNT	802.11n(HT20)	5500	5400.0~5460.0	5459.88	-39.44	20.5	-37.39	-26	0.1136μW/MHz	2.5μW/MHz	Pass
NVNT	802.11n(HT20)	5500	5460.0~5470.0	5462.76	-35.57	20.5	-33.52	-19	0.2775μW/MHz	12.5μW/MHz	Pass
NVNT	802.11n(HT20)	5500	5745.0~5765.0	5757.44	-47.85	20.5	-45.8	-19	0.0164μW/MHz	12.5μW/MHz	Pass
NVNT	802.11n(HT20)	5500	5765.0~5800.0	5781.56	-47.15	20.5	-45.1	-26	0.0192μW/MHz	2.5μW/MHz	Pass


NVNT	802.11n(HT2 0)	5500	30.0~5400.0	3647.1 16	-44.18	2.0 5	-42.13	-26	0.0381μW/ MHz	2.5μW/M Hz	Pass
NVNT	802.11n(HT2 0)	5500	5800.0~100 00.0	6308.1 09	-45.75	2.0 5	-43.7	-26	0.0266μW/ MHz	2.5μW/M Hz	Pass
NVNT	802.11n(HT2 0)	5500	10000.0~26 000.0	24942. 4	-46.79	2.0 5	-44.74	-26	0.0209μW/ MHz	2.5μW/M Hz	Pass
NVNT	802.11n(HT2 0)	5600	5400.0~546 0.0	5425.1 6	-48.26	2.0 5	-46.21	-26	0.0149μW/ MHz	2.5μW/M Hz	Pass
NVNT	802.11n(HT2 0)	5600	5460.0~547 0.0	5467.2 4	-48.74	2.0 5	-46.69	-19	0.0133μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11n(HT2 0)	5600	5745.0~576 5.0	5756.2	-47.48	2.0 5	-45.43	-19	0.0178μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11n(HT2 0)	5600	5765.0~580 0.0	5779.7 2	-46.31	2.0 5	-44.26	-26	0.0233μW/ MHz	2.5μW/M Hz	Pass
NVNT	802.11n(HT2 0)	5600	30.0~5400.0	1746.8 34	-38.4	2.0 5	-36.35	-26	0.1446μW/ MHz	2.5μW/M Hz	Pass
NVNT	802.11n(HT2 0)	5600	5800.0~100 00.0	5871.4 23	-44.95	2.0 5	-42.9	-26	0.0319μW/ MHz	2.5μW/M Hz	Pass
NVNT	802.11n(HT2 0)	5600	10000.0~26 000.0	25544	-46.9	2.0 5	-44.85	-26	0.0204μW/ MHz	2.5μW/M Hz	Pass
NVNT	802.11n(HT2 0)	5720	5400.0~546 0.0	5413.2 4	-47.49	2.0 5	-45.44	-26	0.0178μW/ MHz	2.5μW/M Hz	Pass
NVNT	802.11n(HT2 0)	5720	5460.0~547 0.0	5461.0 4	-49.01	2.0 5	-46.96	-19	0.0125μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11n(HT2 0)	5720	5745.0~576 5.0	5745.8 8	-39.56	2.0 5	-37.51	-19	0.1106μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11n(HT2 0)	5720	5765.0~580 0.0	5781.8	-46.55	2.0 5	-44.5	-26	0.0221μW/ MHz	2.5μW/M Hz	Pass
NVNT	802.11n(HT2 0)	5720	30.0~5400.0	906.36 3	-38.56	2.0 5	-36.51	-26	0.1391μW/ MHz	2.5μW/M Hz	Pass
NVNT	802.11n(HT2 0)	5720	5800.0~100 00.0	6420.7 7	-45.06	2.0 5	-43.01	-26	0.0312μW/ MHz	2.5μW/M Hz	Pass
NVNT	802.11n(HT2 0)	5720	10000.0~26 000.0	25110. 4	-46.06	2.0 5	-44.01	-26	0.0247μW/ MHz	2.5μW/M Hz	Pass
NVNT	802.11ac(VH T20)	5500	5400.0~546 0.0	5459.9 6	-42.29	2.0 5	-40.24	-26	0.0590μW/ MHz	2.5μW/M Hz	Pass
NVNT	802.11ac(VH T20)	5500	5460.0~547 0.0	5467.2	-37.56	2.0 5	-35.51	-19	0.1755μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11ac(VH T20)	5500	5745.0~576 5.0	5761.8 8	-47.87	2.0 5	-45.82	-19	0.0163μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11ac(VH T20)	5500	5765.0~580 0.0	5786.2 4	-46.48	2.0 5	-44.43	-26	0.0224μW/ MHz	2.5μW/M Hz	Pass
NVNT	802.11ac(VH T20)	5500	30.0~5400.0	2467.6 65	-39.94	2.0 5	-37.89	-26	0.1014μW/ MHz	2.5μW/M Hz	Pass
NVNT	802.11ac(VH T20)	5500	5800.0~100 00.0	7091.7 51	-45.55	2.0 5	-43.5	-26	0.0278μW/ MHz	2.5μW/M Hz	Pass
NVNT	802.11ac(VH T20)	5500	10000.0~26 000.0	24953. 6	-46.31	2.0 5	-44.26	-26	0.0233μW/ MHz	2.5μW/M Hz	Pass
NVNT	802.11ac(VH T20)	5600	5400.0~546 0.0	5427.5 6	-47.83	2.0 5	-45.78	-26	0.0164μW/ MHz	2.5μW/M Hz	Pass
NVNT	802.11ac(VH T20)	5600	5460.0~547 0.0	5462.8	-48.84	2.0 5	-46.79	-19	0.0130μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11ac(VH T20)	5600	5745.0~576 5.0	5759.9 2	-47.59	2.0 5	-45.54	-19	0.0174μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11ac(VH T20)	5600	5765.0~580 0.0	5790.0 4	-45.57	2.0 5	-43.52	-26	0.0277μW/ MHz	2.5μW/M Hz	Pass

NVNT	802.11ac(VH T20)	5600	30.0~5400.0	3638.1 43	-44.28	2.0 5	-42.23	-26	0.0373μW/ MHz	2.5μW/M Hz	Pass
NVNT	802.11ac(VH T20)	5600	5800.0~100 00.0	5816.5 88	-44.58	2.0 5	-42.53	-26	0.0348μW/ MHz	2.5μW/M Hz	Pass
NVNT	802.11ac(VH T20)	5600	10000.0~26 000.0	25076. 8	-45.56	2.0 5	-43.51	-26	0.0277μW/ MHz	2.5μW/M Hz	Pass
NVNT	802.11ac(VH T20)	5720	5400.0~546 0.0	5430.5 2	-47.9	2.0 5	-45.85	-26	0.0162μW/ MHz	2.5μW/M Hz	Pass
NVNT	802.11ac(VH T20)	5720	5460.0~547 0.0	5469.2 8	-49.14	2.0 5	-47.09	-19	0.0121μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11ac(VH T20)	5720	5745.0~576 5.0	5745.6 4	-42.91	2.0 5	-40.86	-19	0.0511μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11ac(VH T20)	5720	5765.0~580 0.0	5766.4	-46.71	2.0 5	-44.66	-26	0.0213μW/ MHz	2.5μW/M Hz	Pass
NVNT	802.11ac(VH T20)	5720	30.0~5400.0	825.60 6	-42.8	2.0 5	-40.75	-26	0.0525μW/ MHz	2.5μW/M Hz	Pass
NVNT	802.11ac(VH T20)	5720	5800.0~100 00.0	7049.8 77	-44.82	2.0 5	-42.77	-26	0.0329μW/ MHz	2.5μW/M Hz	Pass
NVNT	802.11ac(VH T20)	5720	10000.0~26 000.0	25579. 2	-46.94	2.0 5	-44.89	-26	0.0202μW/ MHz	2.5μW/M Hz	Pass
NVNT	802.11n(HT4 0)	5510	5400.0~546 0.0	5459.7 6	-40.95	2.0 5	-38.9	-19	0.0803μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11n(HT4 0)	5510	5460.0~547 0.0	5469.4	-35.96	2.0 5	-33.91	-13	0.2533μW/ MHz	50μW/M Hz	Pass
NVNT	802.11n(HT4 0)	5510	5770.0~580 0.0	5795.5 6	-47.3	2.0 5	-45.25	-19	0.0186μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11n(HT4 0)	5510	30.0~5400.0	907.36	-42.17	2.0 5	-40.12	-19	0.0606μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11n(HT4 0)	5510	5800.0~100 00.0	7146.5 86	-45.47	2.0 5	-43.42	-19	0.0283μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11n(HT4 0)	5510	10000.0~26 000.0	25046. 4	-46.8	2.0 5	-44.75	-19	0.0208μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11n(HT4 0)	5590	5400.0~546 0.0	5407.5 2	-47.89	2.0 5	-45.84	-19	0.0162μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11n(HT4 0)	5590	5460.0~547 0.0	5466.4	-48.31	2.0 5	-46.26	-13	0.0147μW/ MHz	50μW/M Hz	Pass
NVNT	802.11n(HT4 0)	5590	5770.0~580 0.0	5795.1 2	-46.42	2.0 5	-44.37	-19	0.0227μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11n(HT4 0)	5590	30.0~5400.0	2469.6 59	-39.81	2.0 5	-37.76	-19	0.1043μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11n(HT4 0)	5590	5800.0~100 00.0	6596.2 42	-45.41	2.0 5	-43.36	-19	0.0287μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11n(HT4 0)	5590	10000.0~26 000.0	24960	-46.47	2.0 5	-44.42	-19	0.0225μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11n(HT4 0)	5710	5400.0~546 0.0	5431.4	-47.74	2.0 5	-45.69	-19	0.0168μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11n(HT4 0)	5710	5460.0~547 0.0	5468.0 8	-48.36	2.0 5	-46.31	-13	0.0145μW/ MHz	50μW/M Hz	Pass
NVNT	802.11n(HT4 0)	5710	5770.0~580 0.0	5790.8 8	-45.74	2.0 5	-43.69	-19	0.0266μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11n(HT4 0)	5710	30.0~5400.0	2463.6 77	-39.52	2.0 5	-37.47	-19	0.1116μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11n(HT4 0)	5710	5800.0~100 00.0	7192.4 48	-45.31	2.0 5	-43.26	-19	0.0294μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11n(HT4 0)	5710	10000.0~26 000.0	25044. 8	-45.54	2.0 5	-43.49	-19	0.0279μW/ MHz	12.5μW/ MHz	Pass


NVNT	802.11ac(VH T40)	5510	5400.0~546 0.0	5458.4	-40.05	2.0 5	-38	-19	0.0988μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11ac(VH T40)	5510	5460.0~547 0.0	5468.6 4	-38.28	2.0 5	-36.23	-13	0.1484μW/ MHz	50μW/M Hz	Pass
NVNT	802.11ac(VH T40)	5510	5770.0~580 0.0	5793.8	-47.53	2.0 5	-45.48	-19	0.0176μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11ac(VH T40)	5510	30.0~5400.0	828.59 7	-44.63	2.0 5	-42.58	-19	0.0343μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11ac(VH T40)	5510	5800.0~100 00.0	5806.6 18	-45.66	2.0 5	-43.61	-19	0.0271μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11ac(VH T40)	5510	10000.0~26 000.0	25051. 2	-46.84	2.0 5	-44.79	-19	0.0207μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11ac(VH T40)	5590	5400.0~546 0.0	5427.6	-47.95	2.0 5	-45.9	-19	0.0160μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11ac(VH T40)	5590	5460.0~547 0.0	5460.1 6	-48.34	2.0 5	-46.29	-13	0.0146μW/ MHz	50μW/M Hz	Pass
NVNT	802.11ac(VH T40)	5590	5770.0~580 0.0	5779	-47.17	2.0 5	-45.12	-19	0.0191μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11ac(VH T40)	5590	30.0~5400.0	830.59 1	-39.63	2.0 5	-37.58	-19	0.1088μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11ac(VH T40)	5590	5800.0~100 00.0	7225.3 49	-45.2	2.0 5	-43.15	-19	0.0301μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11ac(VH T40)	5590	10000.0~26 000.0	25004. 8	-46.83	2.0 5	-44.78	-19	0.0207μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11ac(VH T40)	5710	5400.0~546 0.0	5431.9 6	-47.4	2.0 5	-45.35	-19	0.0181μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11ac(VH T40)	5710	5460.0~547 0.0	5468.2	-48.23	2.0 5	-46.18	-13	0.0150μW/ MHz	50μW/M Hz	Pass
NVNT	802.11ac(VH T40)	5710	5770.0~580 0.0	5770.7 6	-44.71	2.0 5	-42.66	-19	0.0338μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11ac(VH T40)	5710	30.0~5400.0	830.59 1	-39.96	2.0 5	-37.91	-19	0.1010μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11ac(VH T40)	5710	5800.0~100 00.0	9755.7 35	-45.29	2.0 5	-43.24	-19	0.0295μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11ac(VH T40)	5710	10000.0~26 000.0	25004. 8	-46.74	2.0 5	-44.69	-19	0.0211μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11ac(VH T80)	5530	5400.0~546 0.0	5456.4 8	-39.05	2.0 5	-37	-19	0.1243μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11ac(VH T80)	5530	5460.0~546 9.5	5468.6 4	-37.33	2.0 5	-35.28	-13	0.1850μW/ MHz	50μW/M Hz	Pass
NVNT	802.11ac(VH T80)	5530	5469.5~547 0.0	5469.7 6	-40.3	2.0 5	-38.25	-12.91	0.0934μW/ MHz	51.2μW/ MHz	Pass
NVNT	802.11ac(VH T80)	5530	5770.0~580 0.0	5797.8 8	-46.99	2.0 5	-44.94	-19	0.0200μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11ac(VH T80)	5530	30.0~5400.0	831.58 8	-34.86	2.0 5	-32.81	-19	0.3266μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11ac(VH T80)	5530	5800.0~100 00.0	6293.1 54	-45.37	2.0 5	-43.32	-19	0.0290μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11ac(VH T80)	5530	10000.0~26 000.0	25134. 4	-46.78	2.0 5	-44.73	-19	0.0209μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11ac(VH T80)	5610	5400.0~546 0.0	5436.5 6	-47.4	2.0 5	-45.35	-19	0.0182μW/ MHz	12.5μW/ MHz	Pass
NVNT	802.11ac(VH T80)	5610	5460.0~546 9.5	5468.3 2	-46.83	2.0 5	-44.78	-13	0.0207μW/ MHz	50μW/M Hz	Pass
NVNT	802.11ac(VH T80)	5610	5469.5~547 0.0	5469.7 6	-48.29	2.0 5	-46.24	-12.91	0.0148μW/ MHz	51.2μW/ MHz	Pass

NVNT	802.11ac(VH T80)	5610	5770.0~5800.0	5796.2	-46.52	2.0 5	-44.47	-19	0.0222μW/MHz	12.5μW/MHz	Pass
NVNT	802.11ac(VH T80)	5610	30.0~5400.0	832.58 5	-41.34	2.0 5	-39.29	-19	0.0734μW/MHz	12.5μW/MHz	Pass
NVNT	802.11ac(VH T80)	5610	5800.0~10000.0	7089.7 57	-45.26	2.0 5	-43.21	-19	0.0297μW/MHz	12.5μW/MHz	Pass
NVNT	802.11ac(VH T80)	5610	10000.0~26000.0	25033. 6	-46.23	2.0 5	-44.18	-19	0.0238μW/MHz	12.5μW/MHz	Pass
NVNT	802.11ac(VH T80)	5690	5400.0~5460.0	5425.7 6	-47.56	2.0 5	-45.51	-19	0.0175μW/MHz	12.5μW/MHz	Pass
NVNT	802.11ac(VH T80)	5690	5460.0~5469.5	5461.4 8	-47.58	2.0 5	-45.53	-13	0.0174μW/MHz	50μW/MHz	Pass
NVNT	802.11ac(VH T80)	5690	5469.5~5470.0	5469.6 8	-49.94	2.0 5	-47.89	-12.91	0.0101μW/MHz	51.2μW/MHz	Pass
NVNT	802.11ac(VH T80)	5690	5770.0~5800.0	5770.8 4	-38.37	2.0 5	-36.32	-19	0.1456μW/MHz	12.5μW/MHz	Pass
NVNT	802.11ac(VH T80)	5690	30.0~5400.0	3150.6 1	-45.36	2.0 5	-43.31	-19	0.0291μW/MHz	12.5μW/MHz	Pass
NVNT	802.11ac(VH T80)	5690	5800.0~10000.0	5804.6 24	-44.08	2.0 5	-42.03	-19	0.0391μW/MHz	12.5μW/MHz	Pass
NVNT	802.11ac(VH T80)	5690	10000.0~26000.0	25016	-46.01	2.0 5	-43.96	-19	0.0250μW/MHz	12.5μW/MHz	Pass


In_band_NVNT_ANT1_802_11a_5500

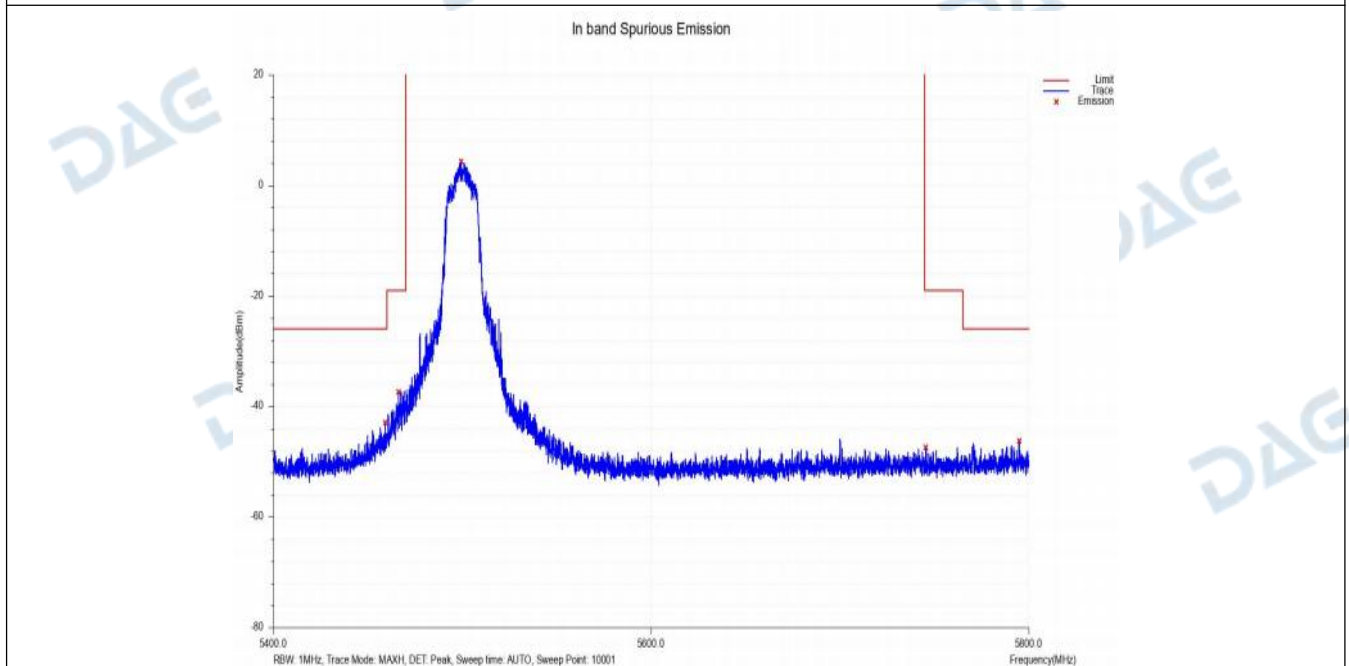


Out_of_band_NVNT_ANT1_802_11a_5500

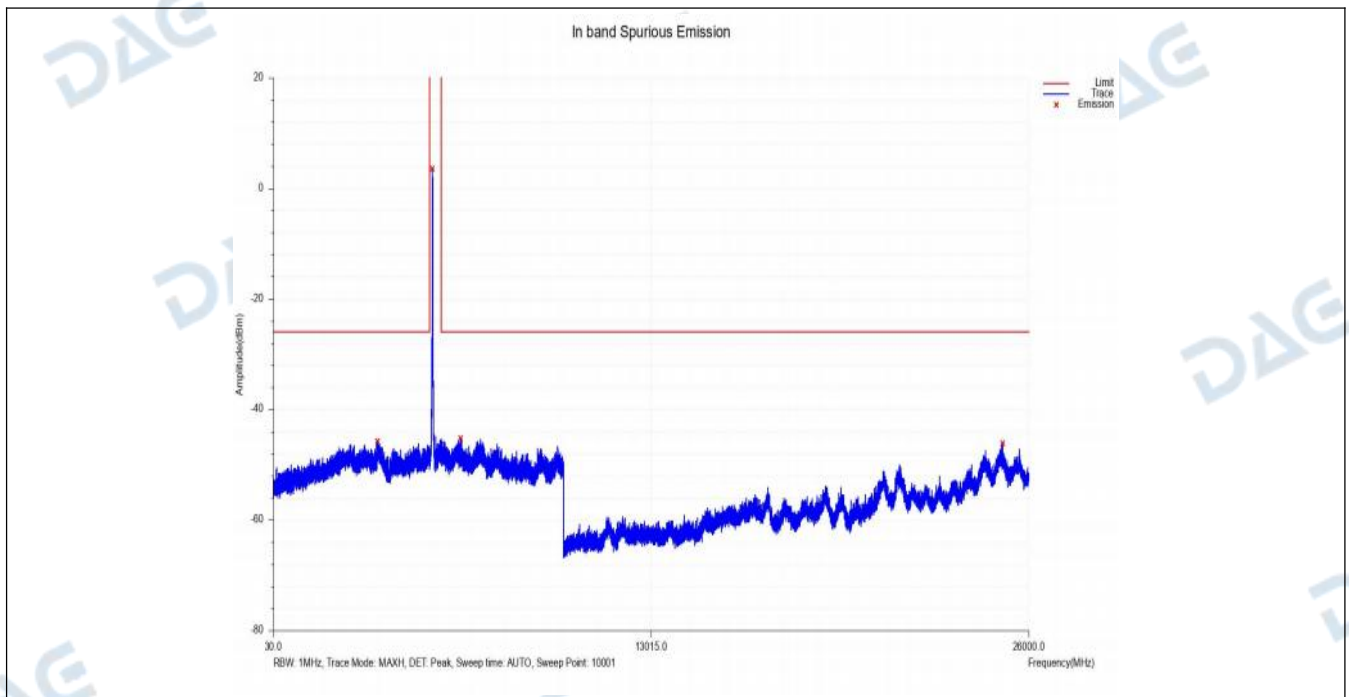


In_band_NVNT_ANT1_802_11a_5600

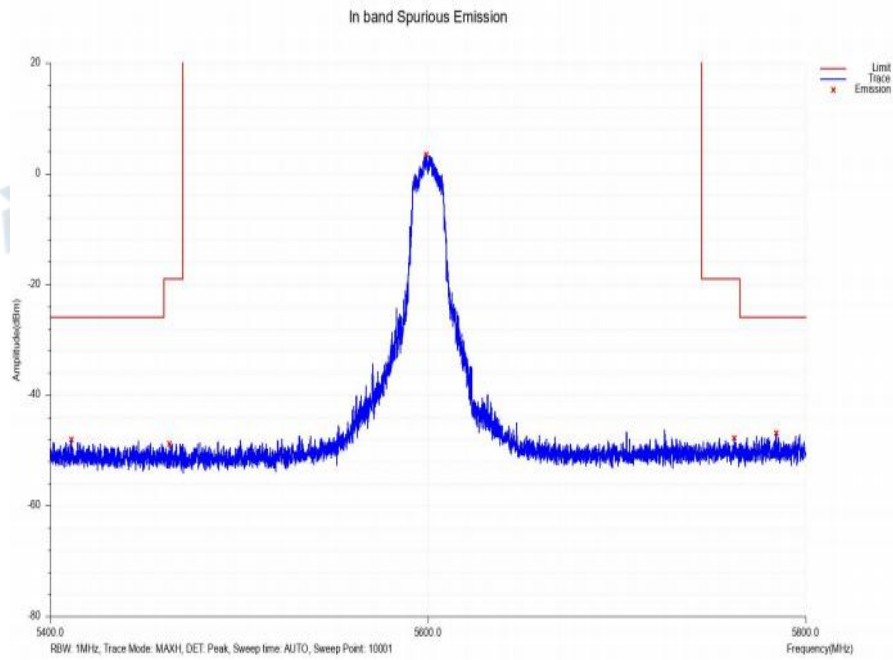


Out_of_band_NVNT_ANT1_802_11a_5600

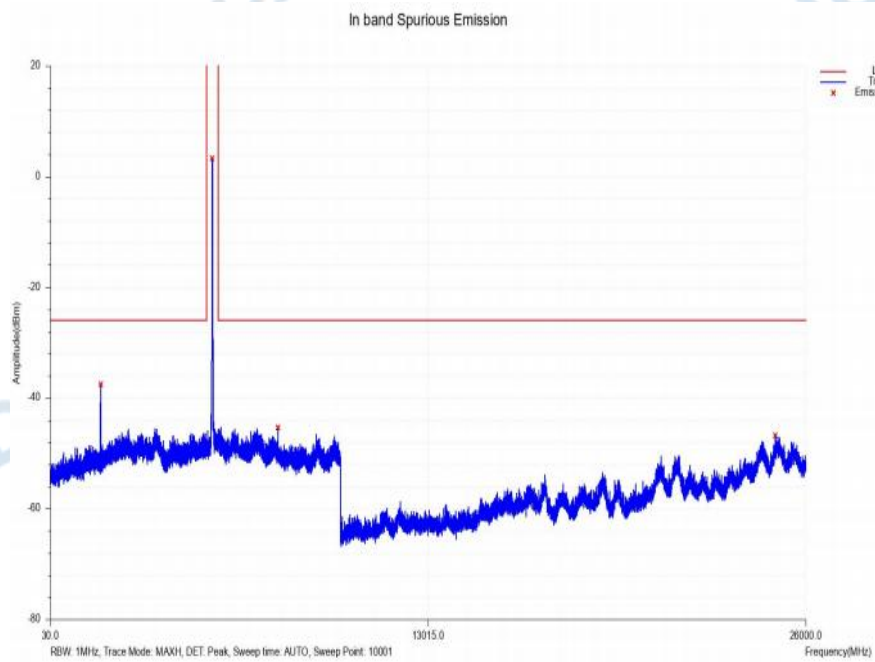


In_band_NVNT_ANT1_802_11a_5720

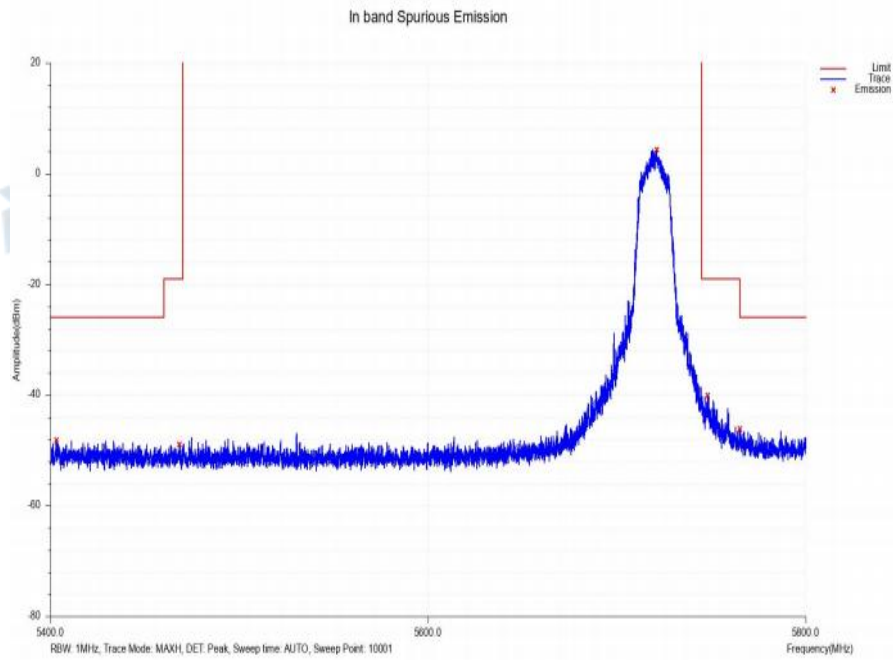


Out_of_band_NVNT_ANT1_802_11a_5720

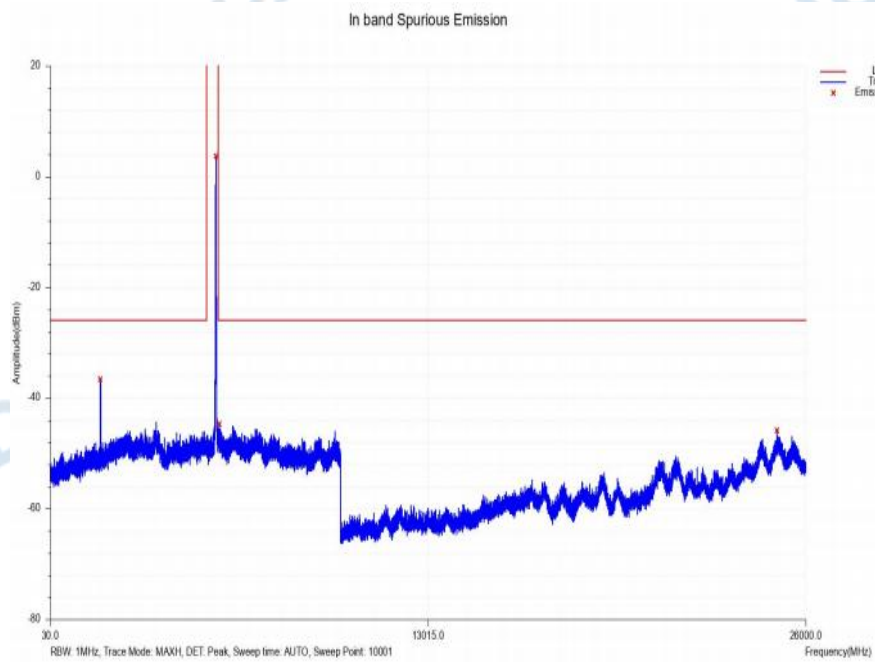


In_band_NVNT_ANT1_802_11n(HT20)_5500

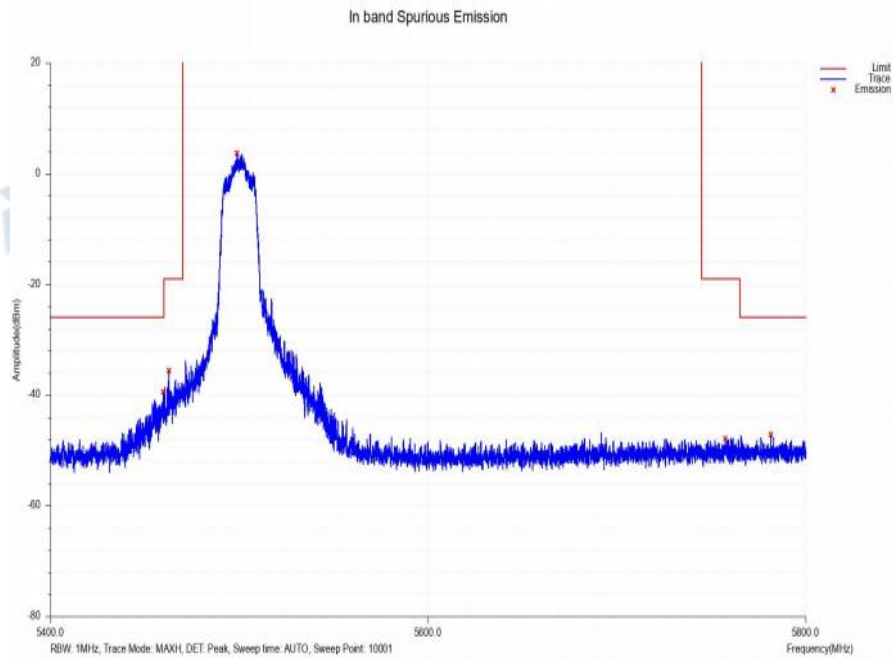


Out_of_band_NVNT_ANT1_802_11n(HT20)_5500

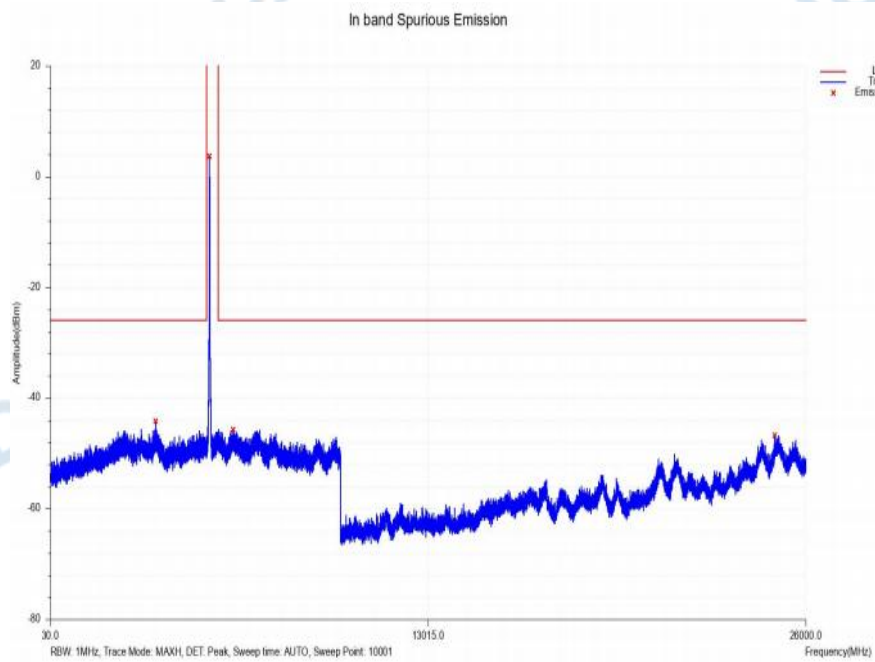


In_band_NVNT_ANT1_802_11n(HT20)_5600

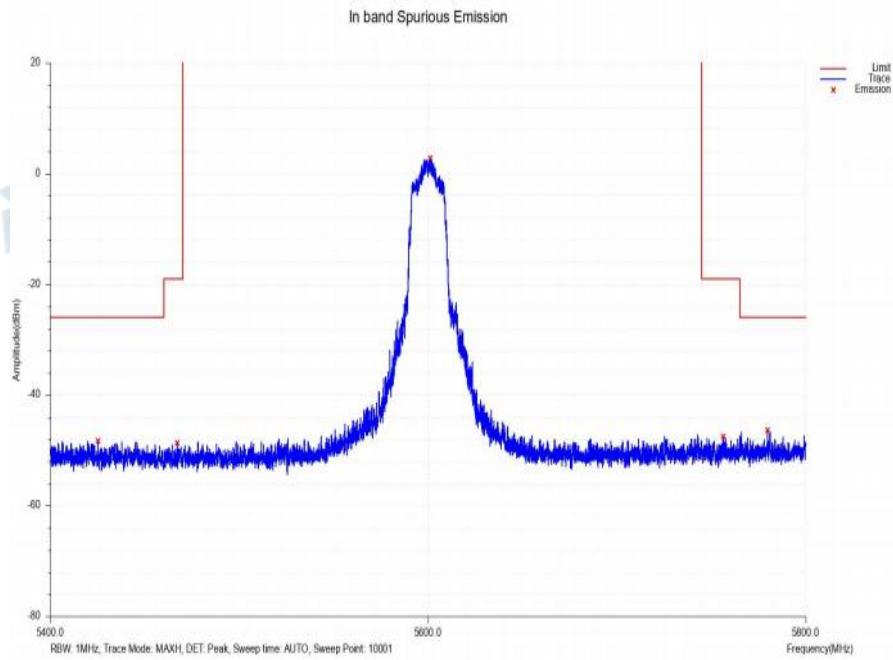


Out_of_band_NVNT_ANT1_802_11n(HT20)_5600

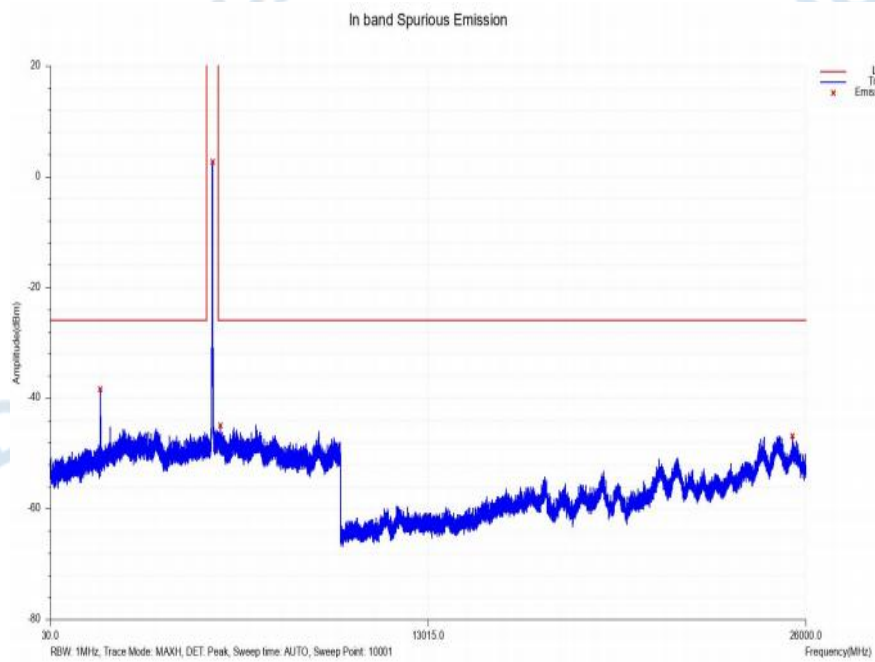


In_band_NVNT_ANT1_802_11n(HT20)_5720

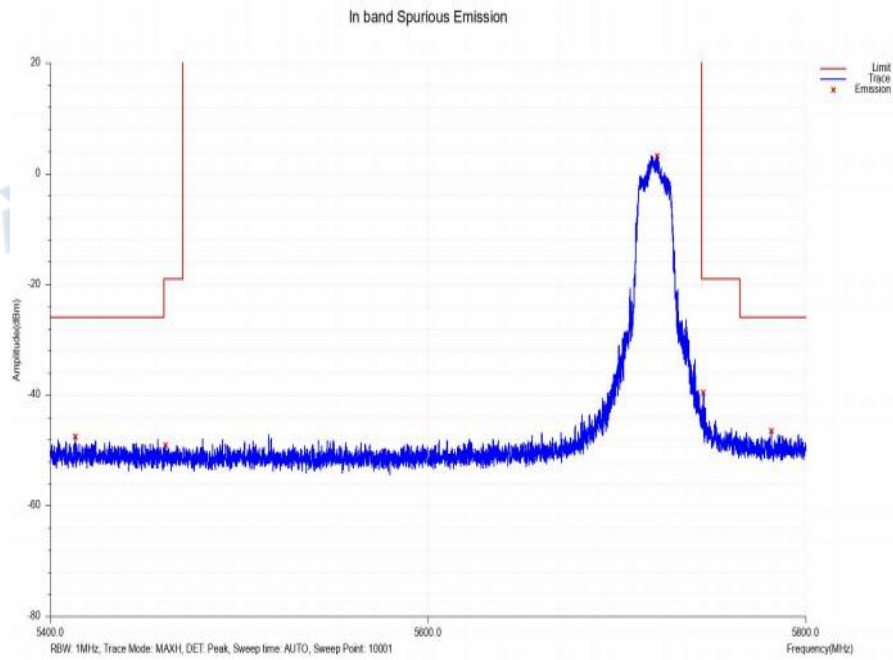


Out_of_band_NVNT_ANT1_802_11n(HT20)_5720

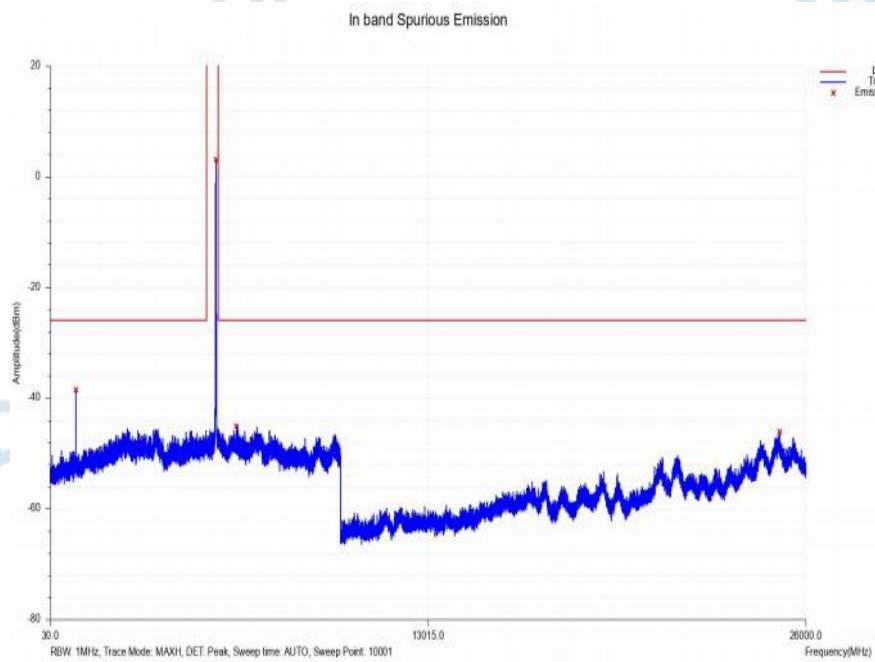


In_band_NVNT_ANT1_802_11ac(VHT20)_5500

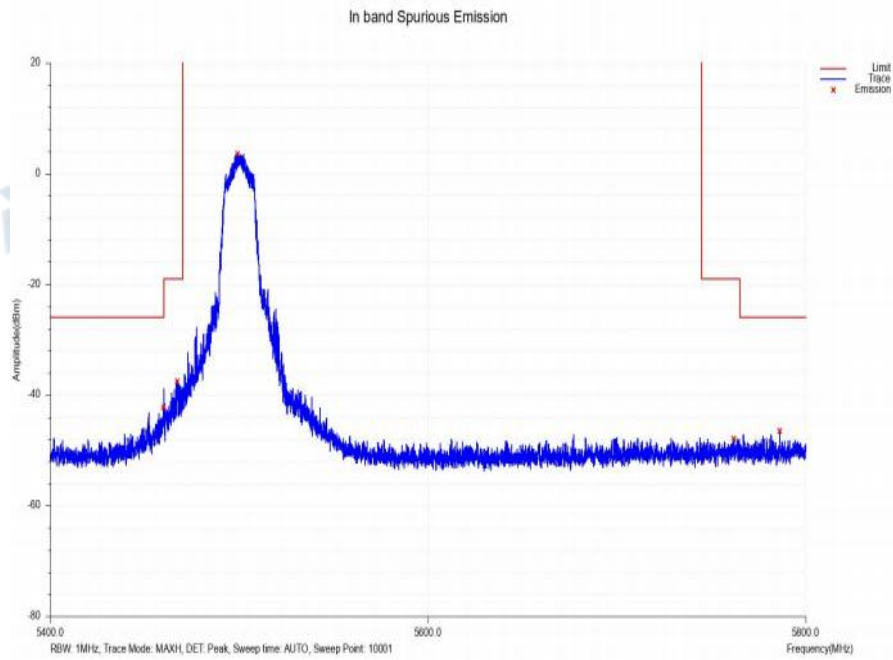


Out_of_band_NVNT_ANT1_802_11ac(VHT20)_5500

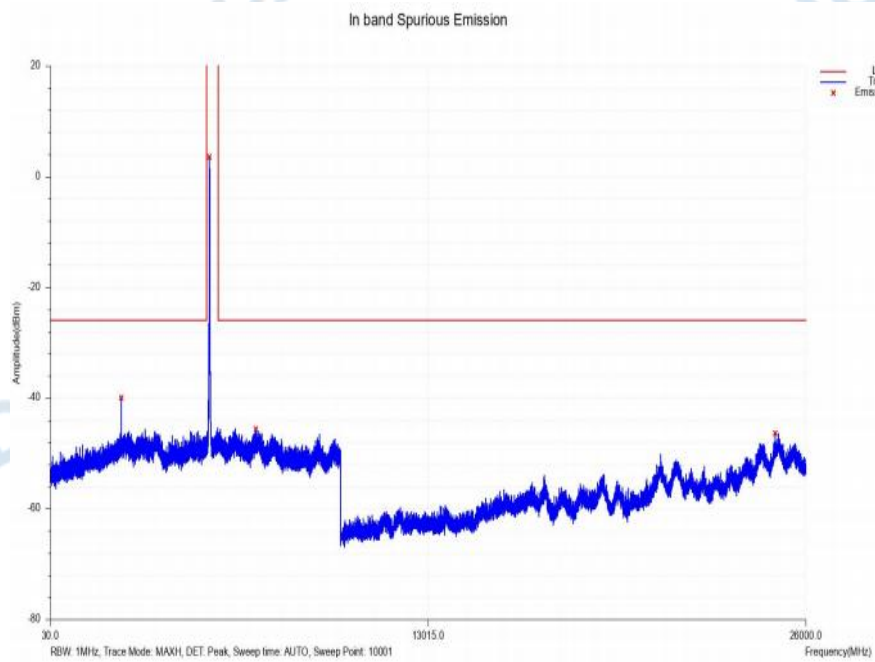


In_band_NVNT_ANT1_802_11ac(VHT20)_5600

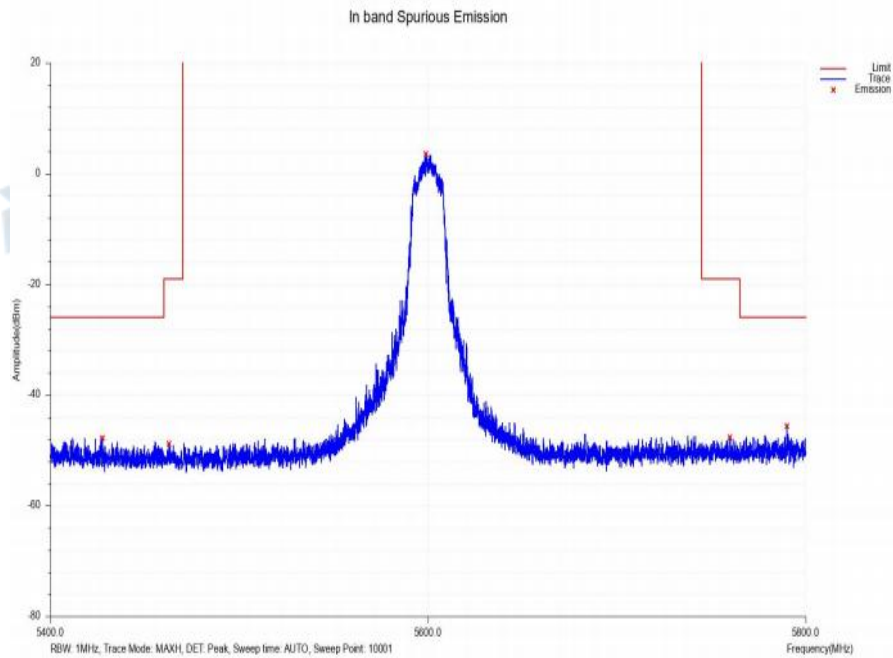


Out_of_band_NVNT_ANT1_802_11ac(VHT20)_5600

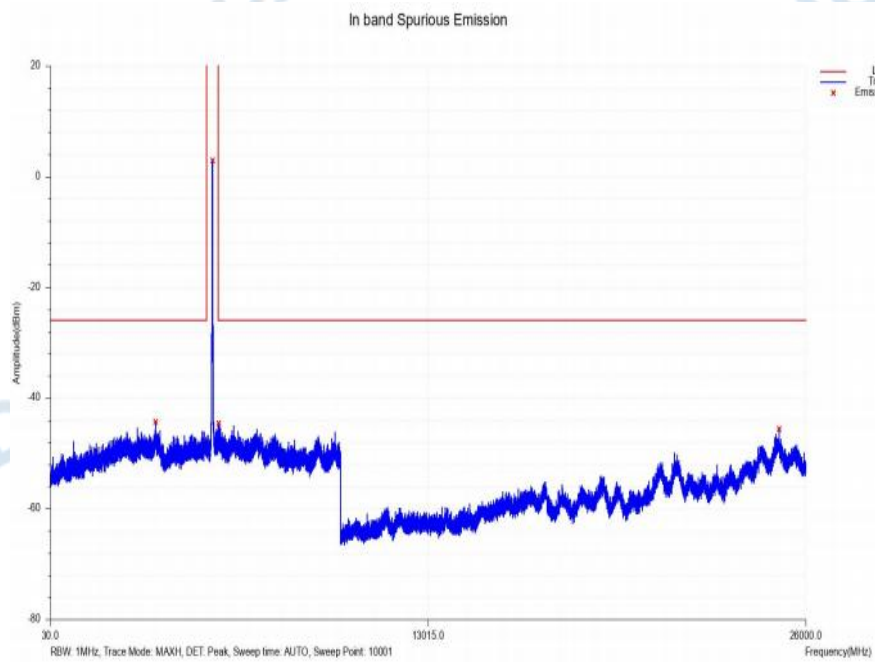


In_band_NVNT_ANT1_802_11ac(VHT20)_5720

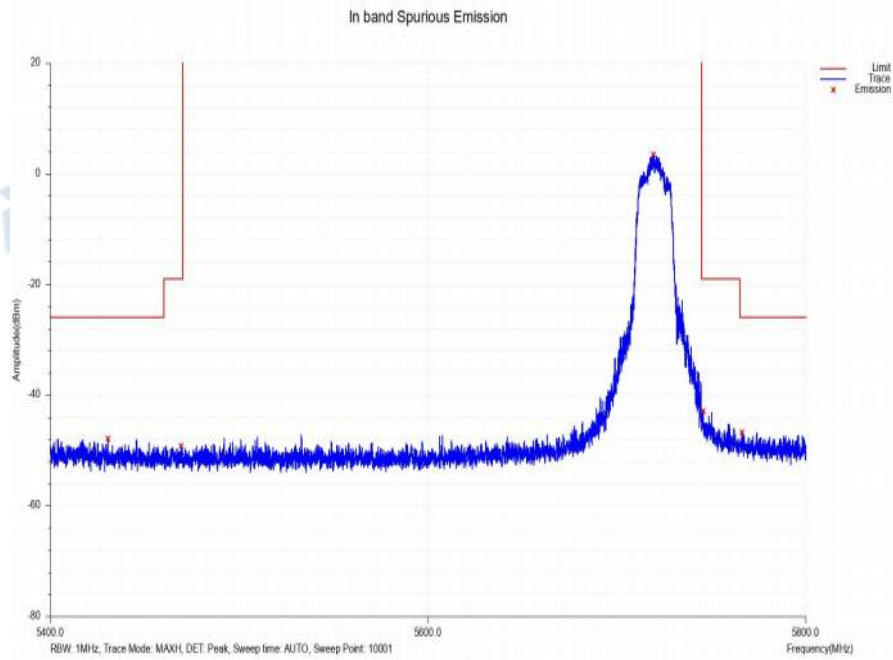


Out_of_band_NVNT_ANT1_802_11ac(VHT20)_5720

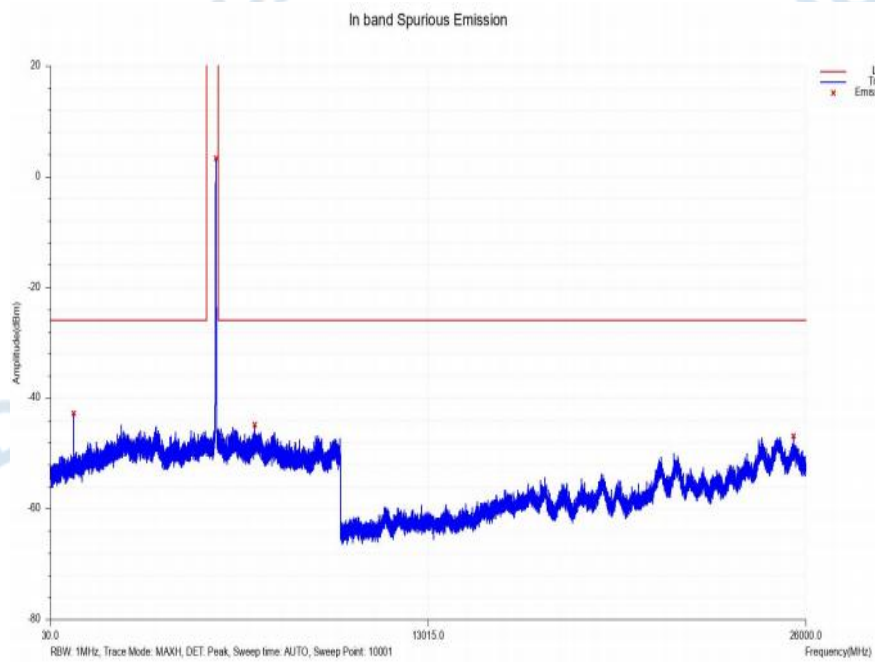


In_band_NVNT_ANT1_802_11n(HT40)_5510

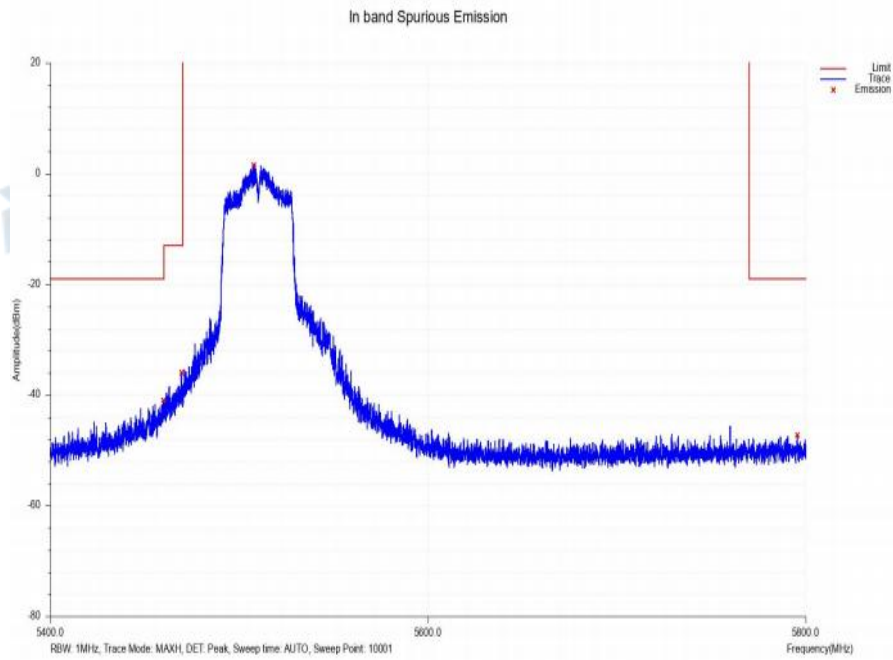


Out_of_band_NVNT_ANT1_802_11n(HT40)_5510

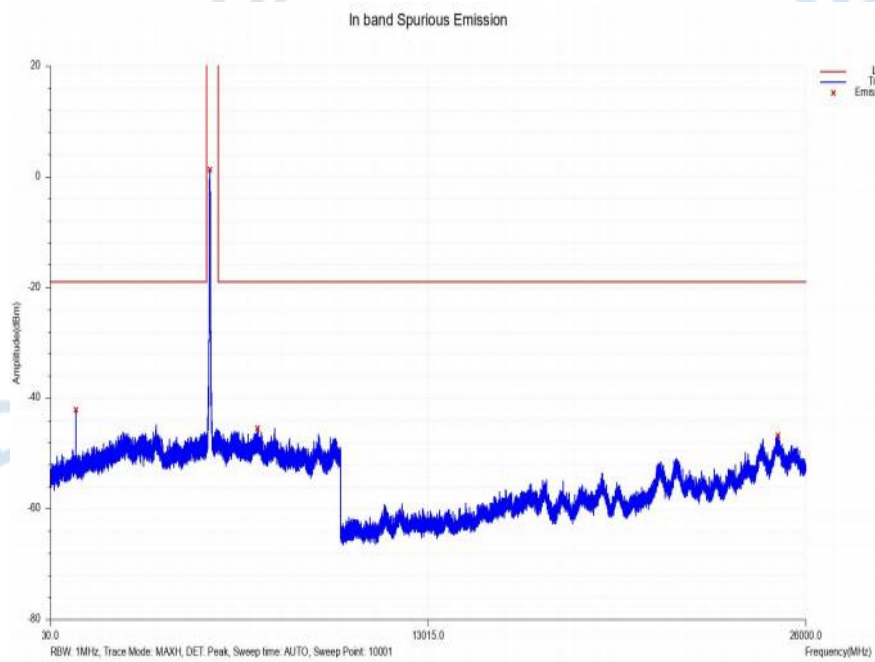


In_band_NVNT_ANT1_802_11n(HT40)_5590

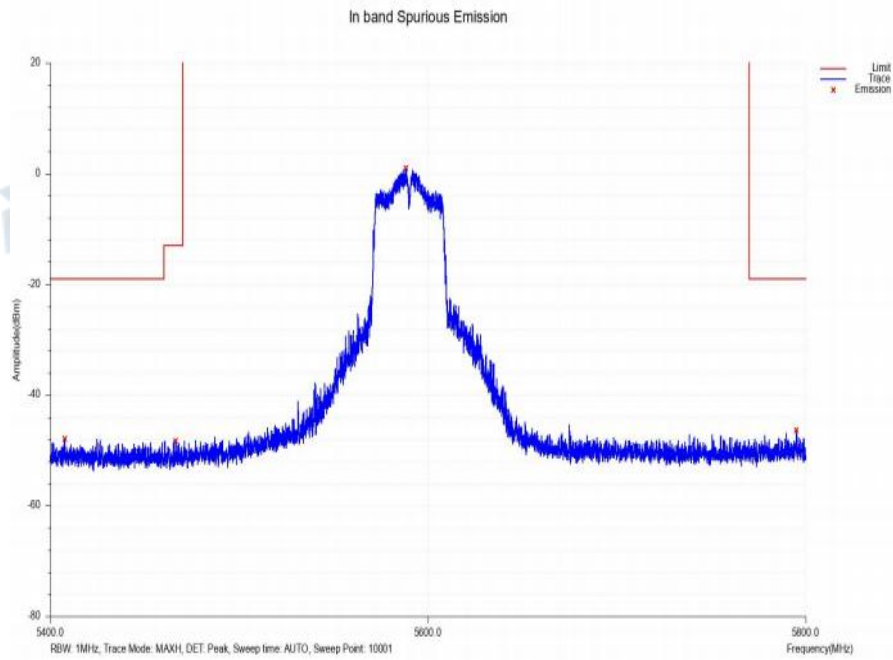


Out_of_band_NVNT_ANT1_802_11n(HT40)_5590

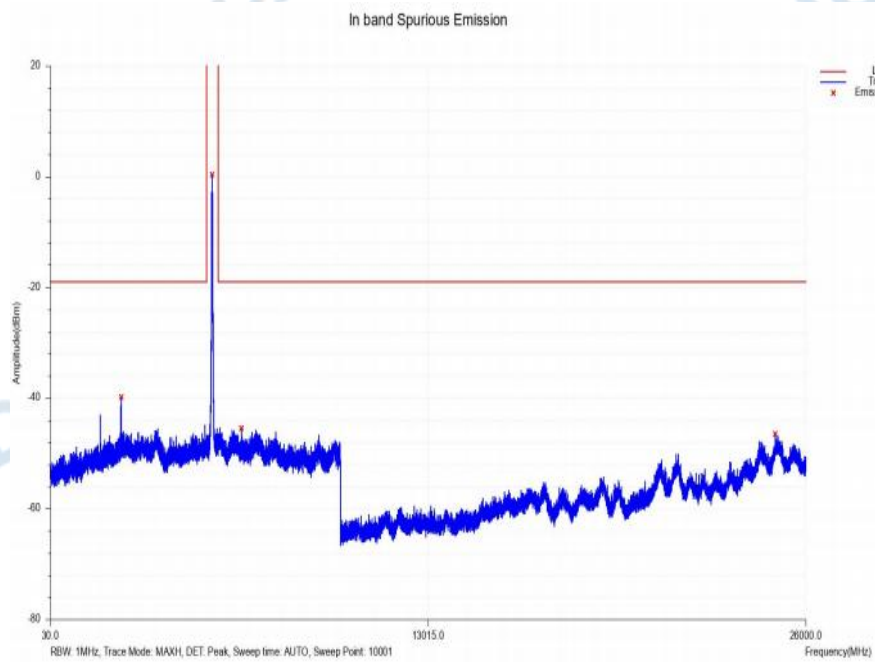


In_band_NVNT_ANT1_802_11n(HT40)_5710

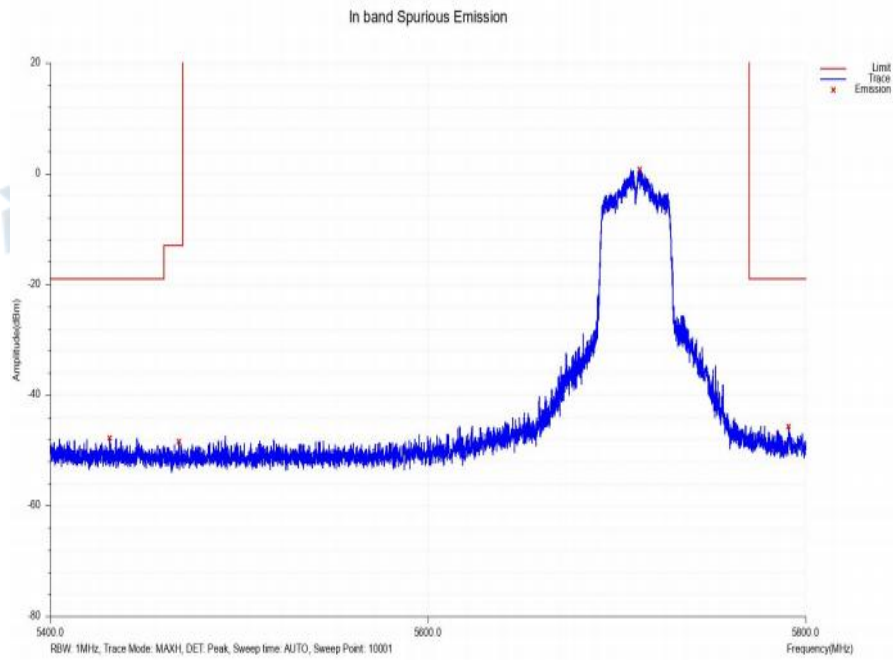


Out_of_band_NVNT_ANT1_802_11n(HT40)_5710

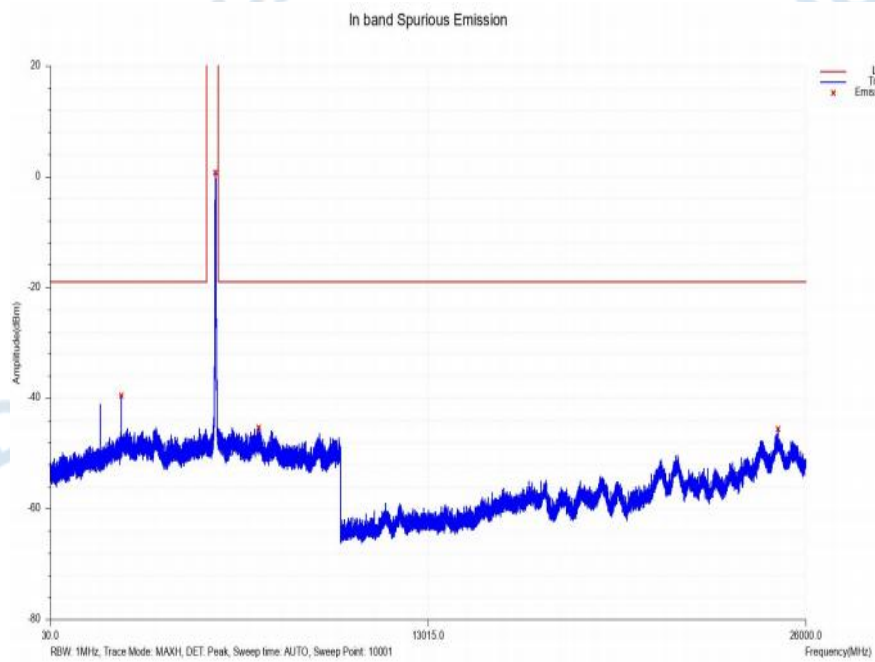


In_band_NVNT_ANT1_802_11ac(VHT40)_5510

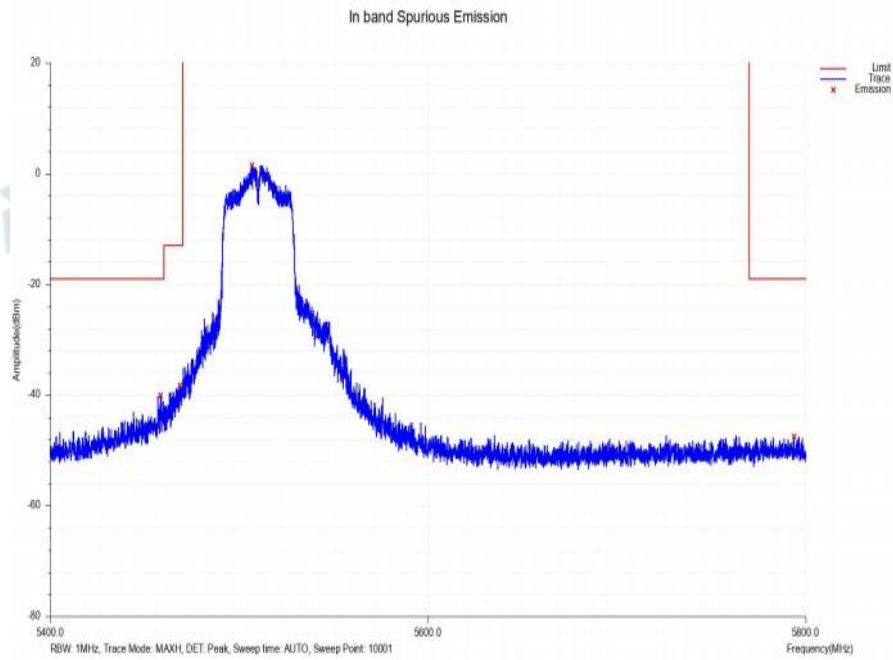


Out_of_band_NVNT_ANT1_802_11ac(VHT40)_5510

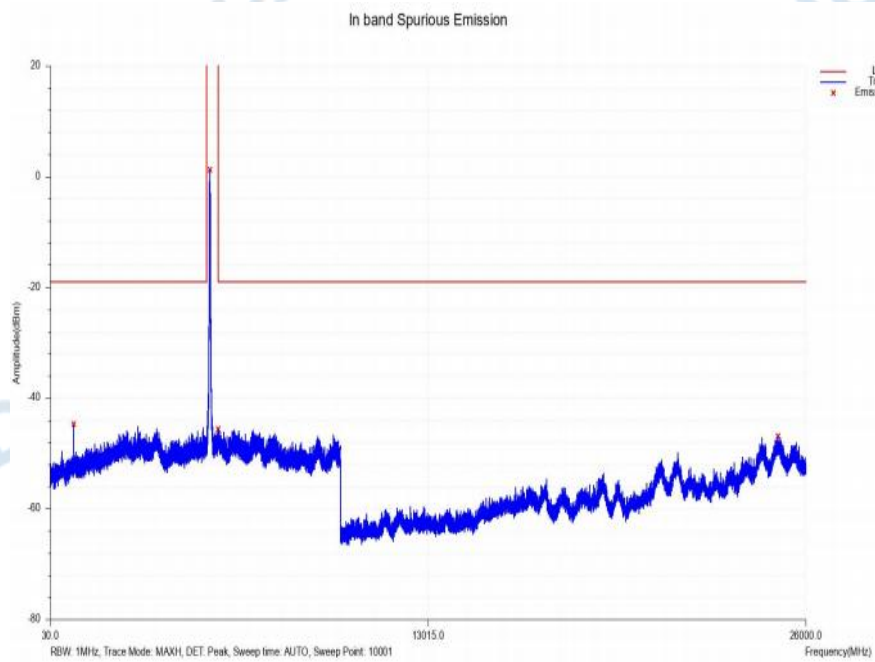


In_band_NVNT_ANT1_802_11ac(VHT40)_5590

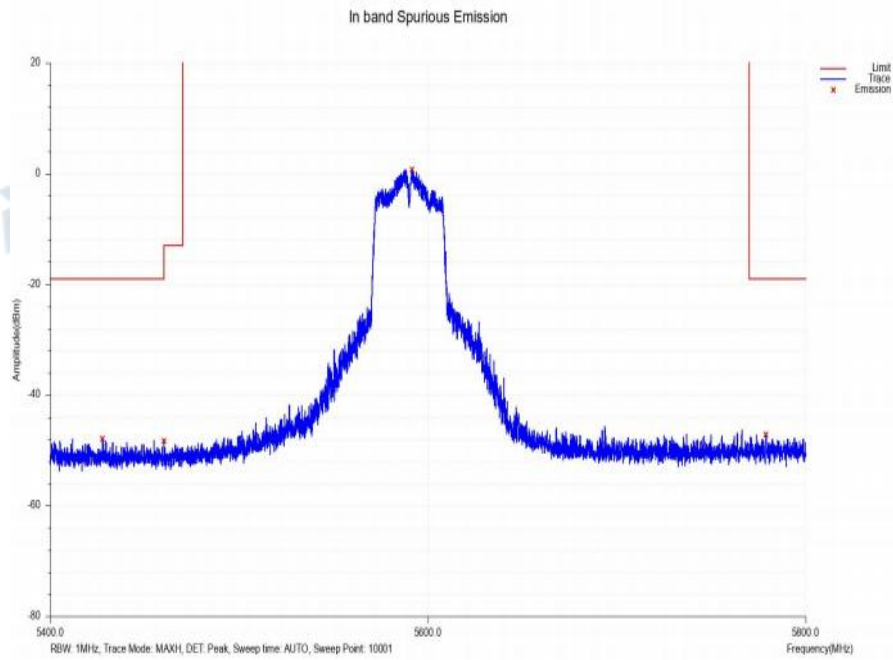


Out_of_band_NVNT_ANT1_802_11ac(VHT40)_5590

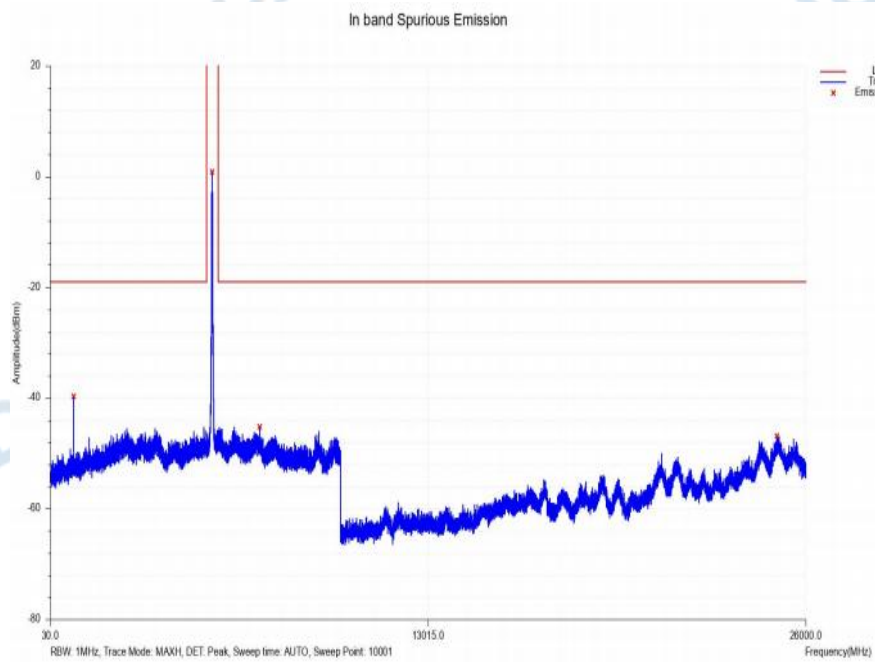


In_band_NVNT_ANT1_802_11ac(VHT40)_5710

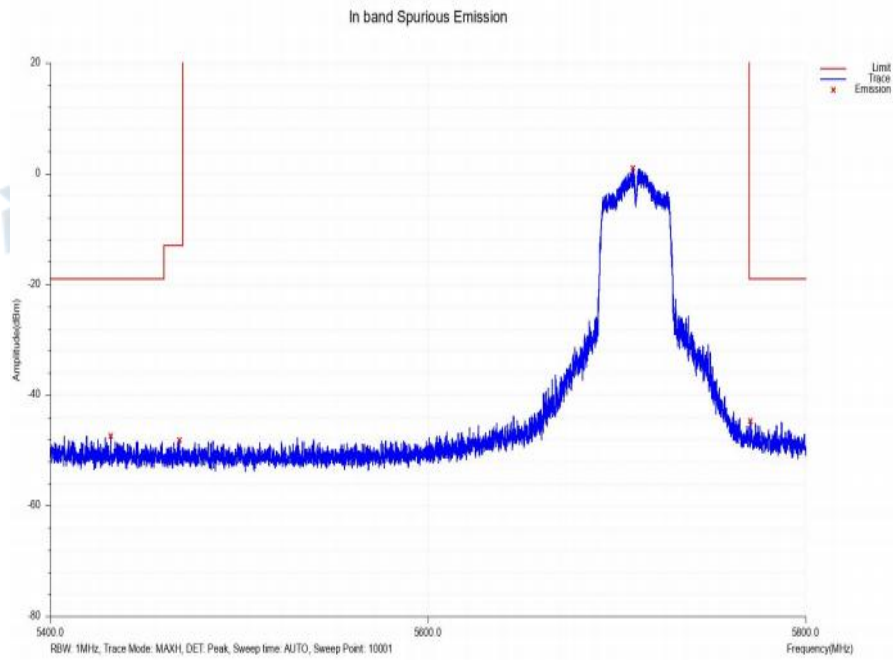


Out_of_band_NVNT_ANT1_802_11ac(VHT40)_5710

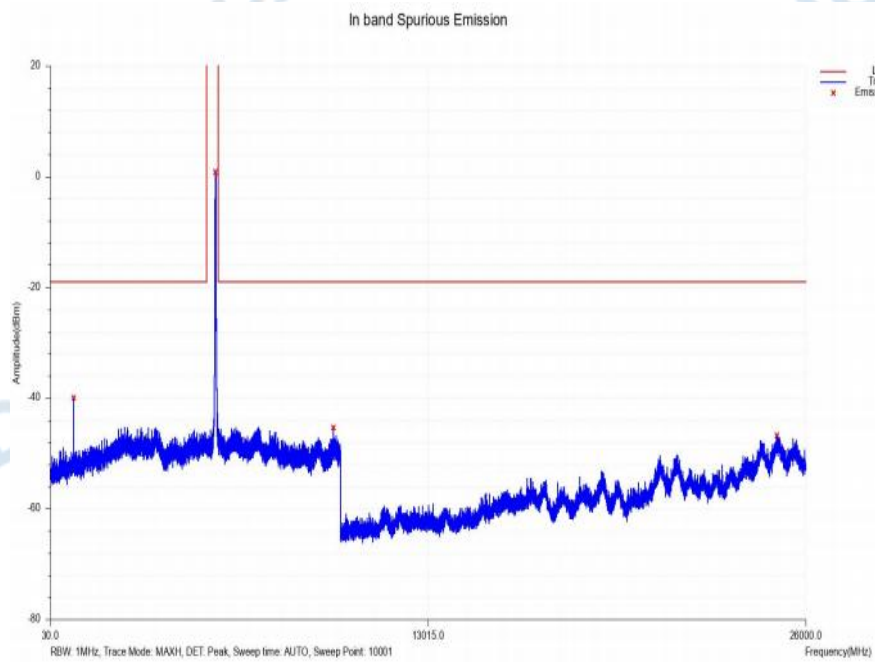


In_band_NVNT_ANT1_802_11ac(VHT80)_5530

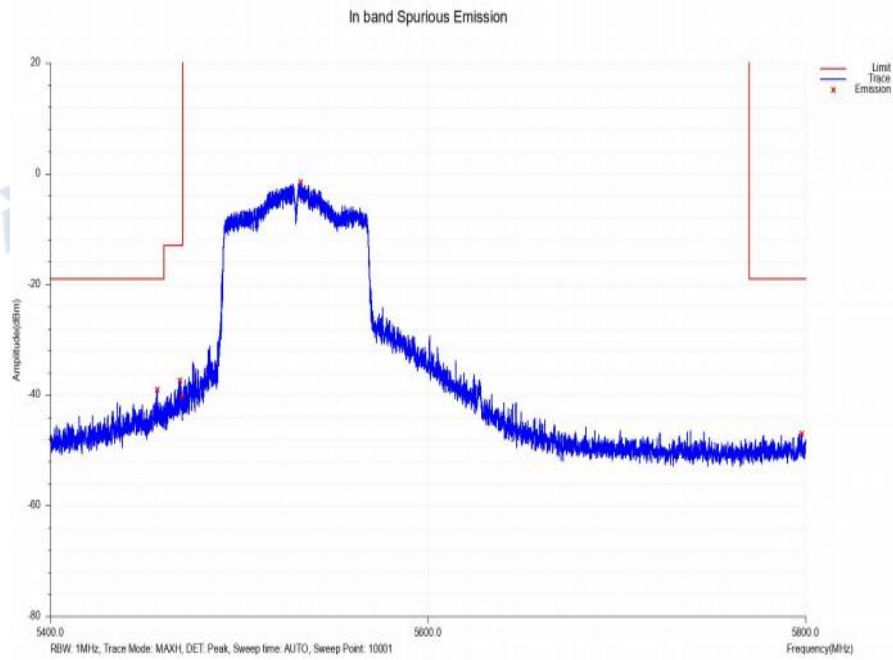


Out_of_band_NVNT_ANT1_802_11ac(VHT80)_5530

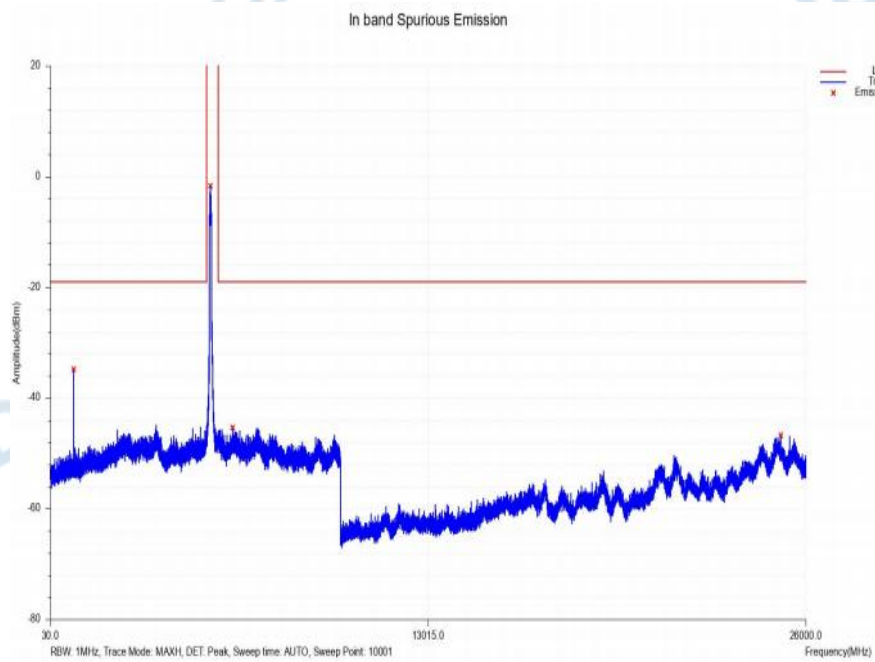


In_band_NVNT_ANT1_802_11ac(VHT80)_5610

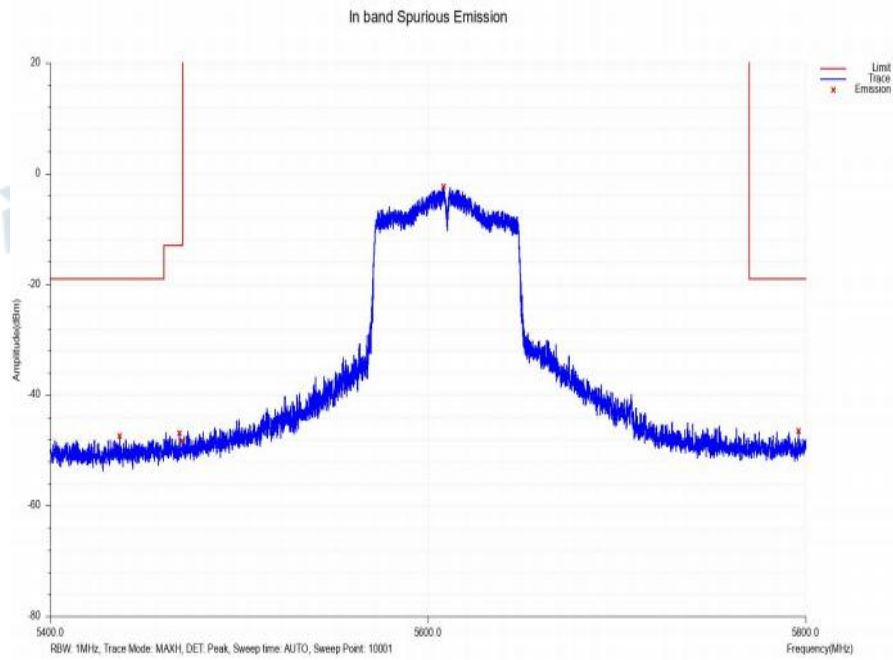


Out_of_band_NVNT_ANT1_802_11ac(VHT80)_5610

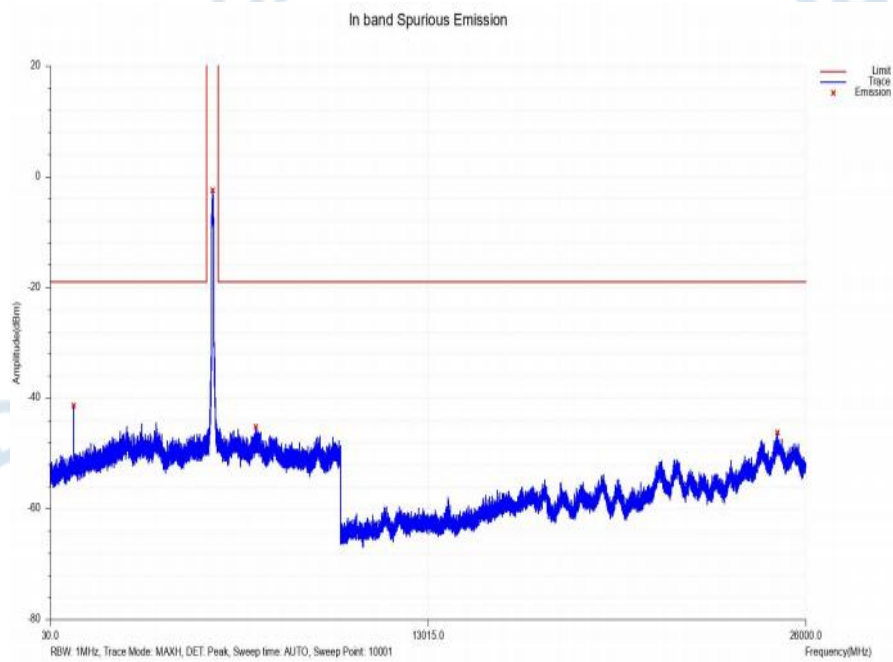

In_band_NVNT_ANT1_802_11ac(VHT80)_5690

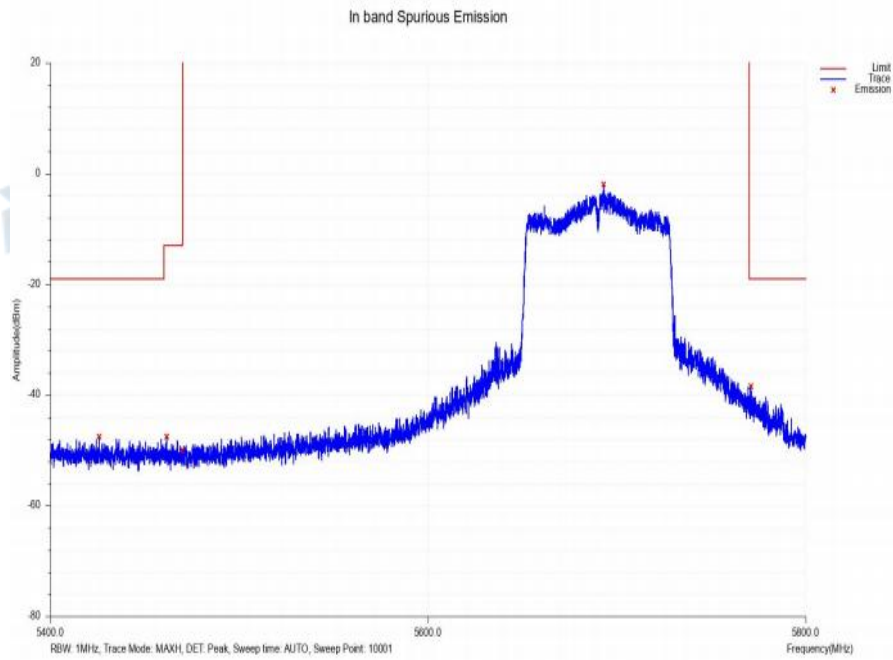


Out_of_band_NVNT_ANT1_802_11ac(VHT80)_5690

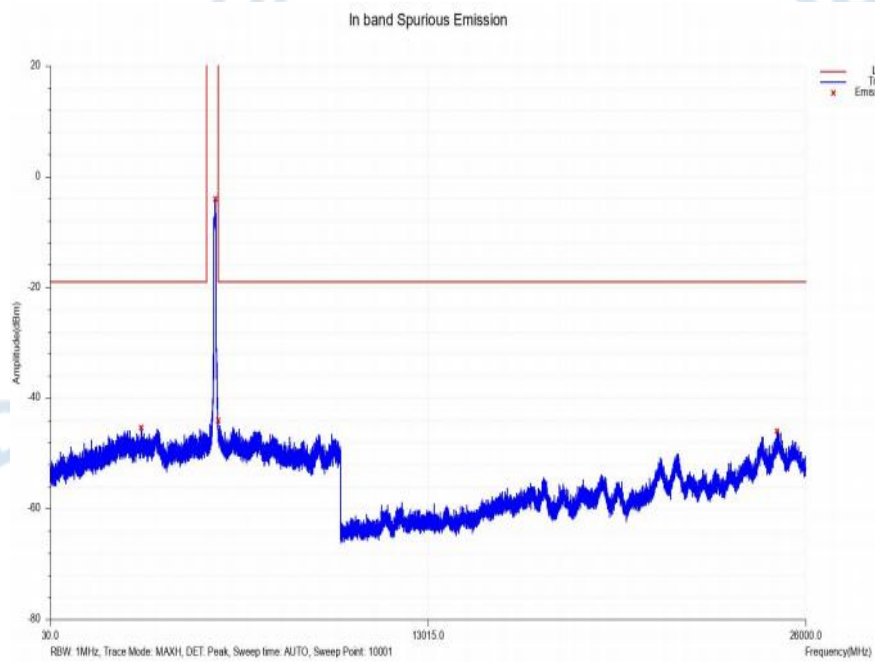


6. ACP Measure

Condition	Antenna	Mode	Frequency(MHz)	Frequency Offset(MHz)	Lower Level(dBc)	Upper Level(dBc)	Limit(dBc)	Result
NVNT	ANT1	802.11a	5500.00	20MHz	-30.28	-28.32	-25	Pass
NVNT	ANT1	802.11a	5500.00	40MHz	-45.78	-46.26	-40	Pass
NVNT	ANT1	802.11a	5600.00	20MHz	-29.73	-30.10	-25	Pass
NVNT	ANT1	802.11a	5600.00	40MHz	-46.18	-48.24	-40	Pass
NVNT	ANT1	802.11a	5720.00	20MHz	-29.93	-31.22	-25	Pass
NVNT	ANT1	802.11a	5720.00	40MHz	-47.75	-50.06	-40	Pass
NVNT	ANT1	802.11n(HT20)	5500.00	20MHz	-30.51	-27.52	-25	Pass
NVNT	ANT1	802.11n(HT20)	5500.00	40MHz	-44.29	-43.03	-40	Pass
NVNT	ANT1	802.11n(HT20)	5600.00	20MHz	-29.72	-29.07	-25	Pass
NVNT	ANT1	802.11n(HT20)	5600.00	40MHz	-48.50	-49.22	-40	Pass
NVNT	ANT1	802.11n(HT20)	5720.00	20MHz	-30.41	-31.40	-25	Pass
NVNT	ANT1	802.11n(HT20)	5720.00	40MHz	-50.57	-52.48	-40	Pass
NVNT	ANT1	802.11ac(VHT20)	5500.00	20MHz	-30.21	-28.31	-25	Pass
NVNT	ANT1	802.11ac(VHT20)	5500.00	40MHz	-45.20	-45.38	-40	Pass
NVNT	ANT1	802.11ac(VHT20)	5600.00	20MHz	-29.86	-30.28	-25	Pass
NVNT	ANT1	802.11ac(VHT20)	5600.00	40MHz	-45.93	-48.04	-40	Pass
NVNT	ANT1	802.11ac(VHT20)	5720.00	20MHz	-30.49	-31.17	-25	Pass
NVNT	ANT1	802.11ac(VHT20)	5720.00	40MHz	-50.45	-52.25	-40	Pass
NVNT	ANT1	802.11n(HT40)	5510.00	40MHz	-32.75	-27.00	-25	Pass
NVNT	ANT1	802.11n(HT40)	5510.00	80MHz	-47.71	-46.46	-40	Pass
NVNT	ANT1	802.11n(HT40)	5590.00	40MHz	-31.46	-28.59	-25	Pass
NVNT	ANT1	802.11n(HT40)	5590.00	80MHz	-48.16	-50.23	-40	Pass
NVNT	ANT1	802.11n(HT40)	5710.00	40MHz	-33.39	-30.85	-25	Pass
NVNT	ANT1	802.11n(HT40)	5710.00	80MHz	-47.74	-51.44	-40	Pass
NVNT	ANT1	802.11ac(VHT40)	5510.00	40MHz	-31.42	-25.84	-25	Pass
NVNT	ANT1	802.11ac(VHT40)	5510.00	80MHz	-47.83	-45.90	-40	Pass
NVNT	ANT1	802.11ac(VHT40)	5590.00	40MHz	-31.03	-28.34	-25	Pass
NVNT	ANT1	802.11ac(VHT40)	5590.00	80MHz	-47.29	-49.85	-40	Pass
NVNT	ANT1	802.11ac(VHT40)	5710.00	40MHz	-33.25	-30.60	-25	Pass
NVNT	ANT1	802.11ac(VHT40)	5710.00	80MHz	-48.04	-51.33	-40	Pass
NVNT	ANT1	802.11ac(VHT80)	5530.00	80MHz	-36.12	-27.41	-25	Pass
NVNT	ANT1	802.11ac(VHT80)	5610.00	80MHz	-34.06	-30.36	-25	Pass
NVNT	ANT1	802.11ac(VHT80)	5690.00	80MHz	-32.30	-30.33	-25	Pass


ACP_Measure_NVNT_ANT1_802_11a_5500_20M

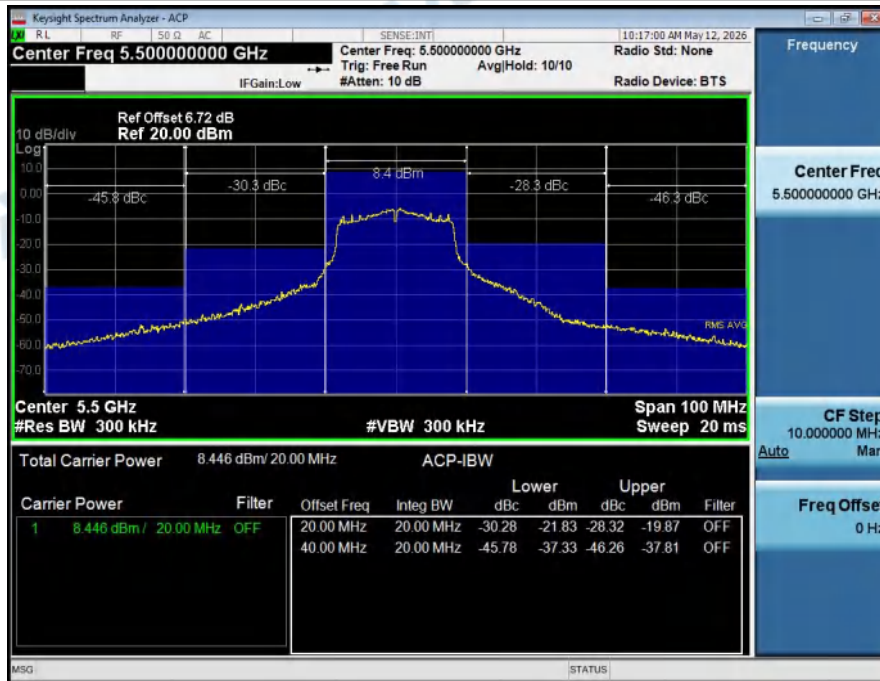

ACP_Measure_NVNT_ANT1_802_11a_5600_20M

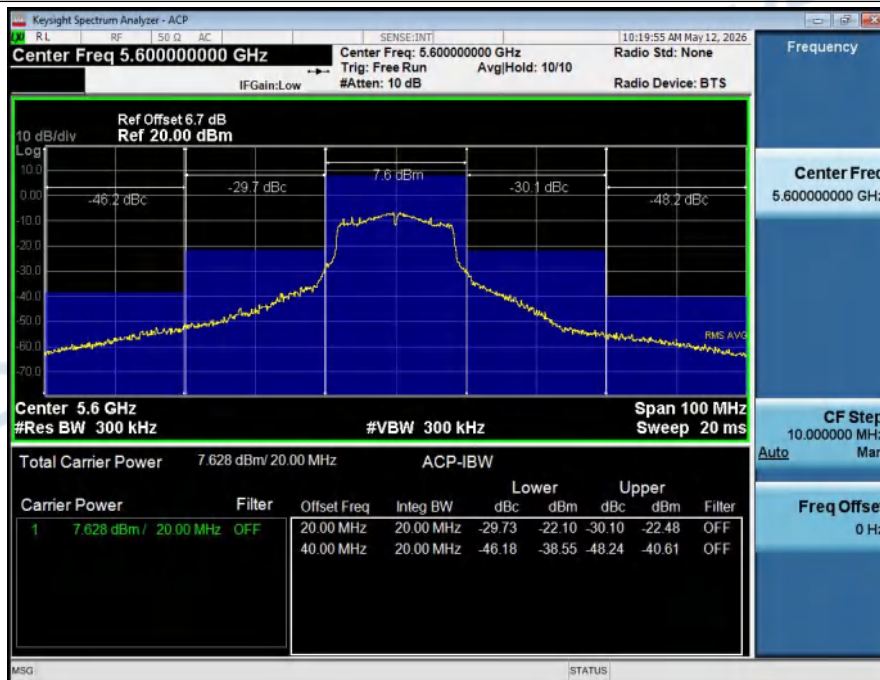


ACP_Measure_NVNT_ANT1_802_11a_5720_20M

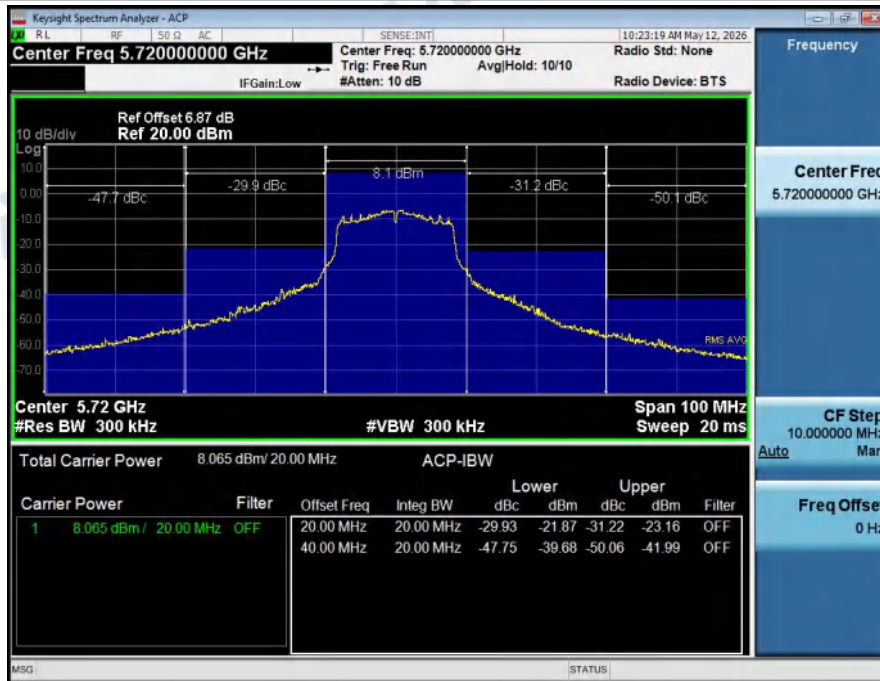


ACP_Measure_NVNT_ANT1_802_11n(HT20)_5500_20M




ACP_Measure_NVNT_ANT1_802_11n(HT20)_5600_20M

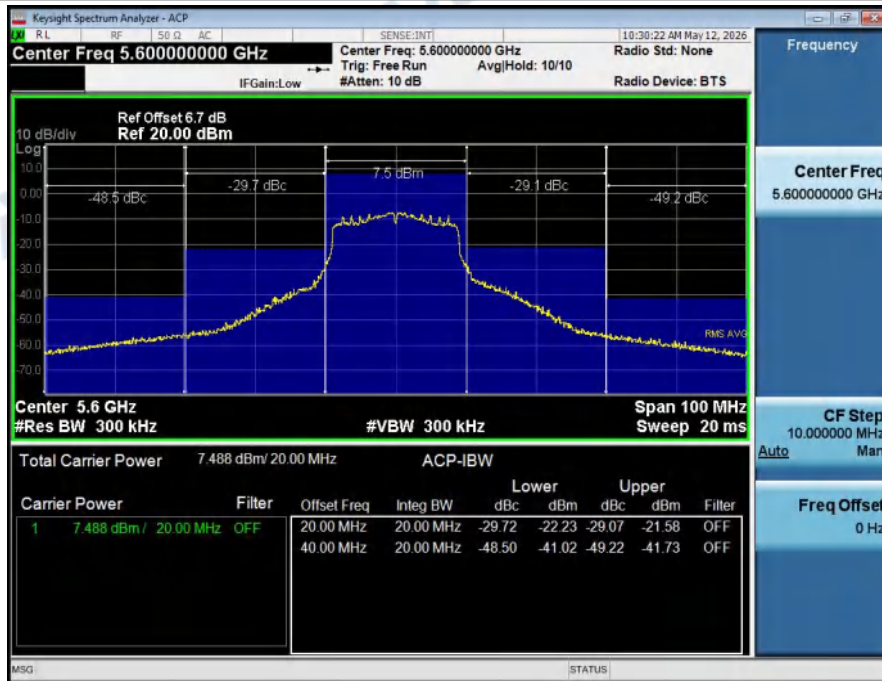


ACP_Measure_NVNT_ANT1_802_11n(HT20)_5720_20M

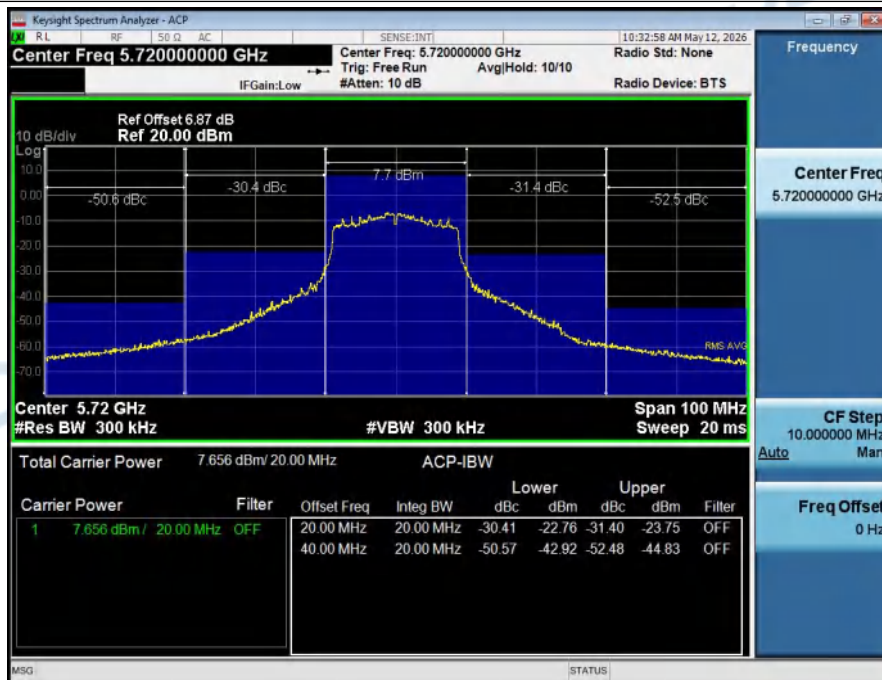


ACP_Measure_NVNT_ANT1_802_11ac(VHT20)_5500_20M

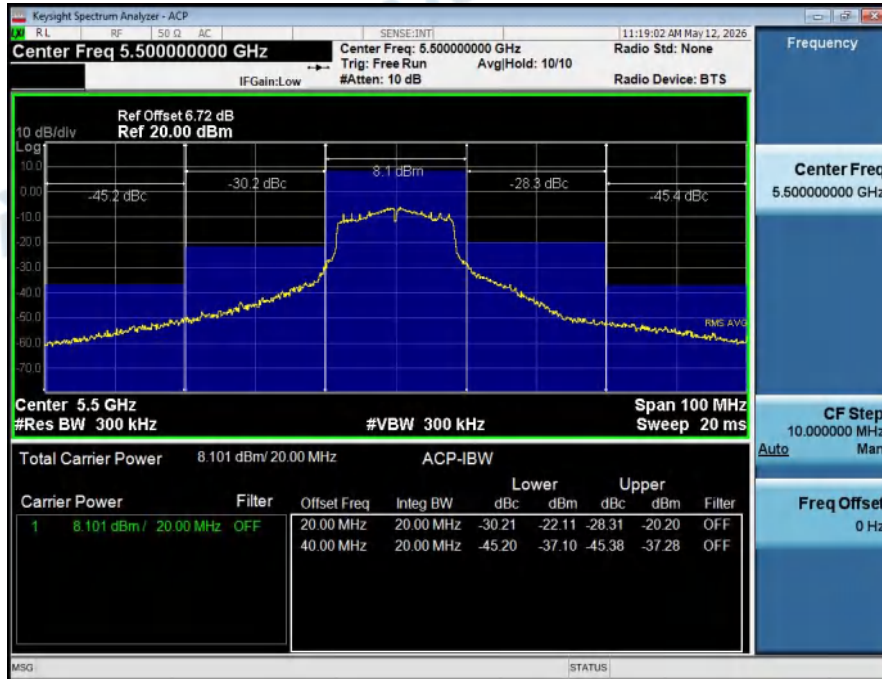

ACP_Measure_NVNT_ANT1_802_11ac(VHT20)_5600_20M

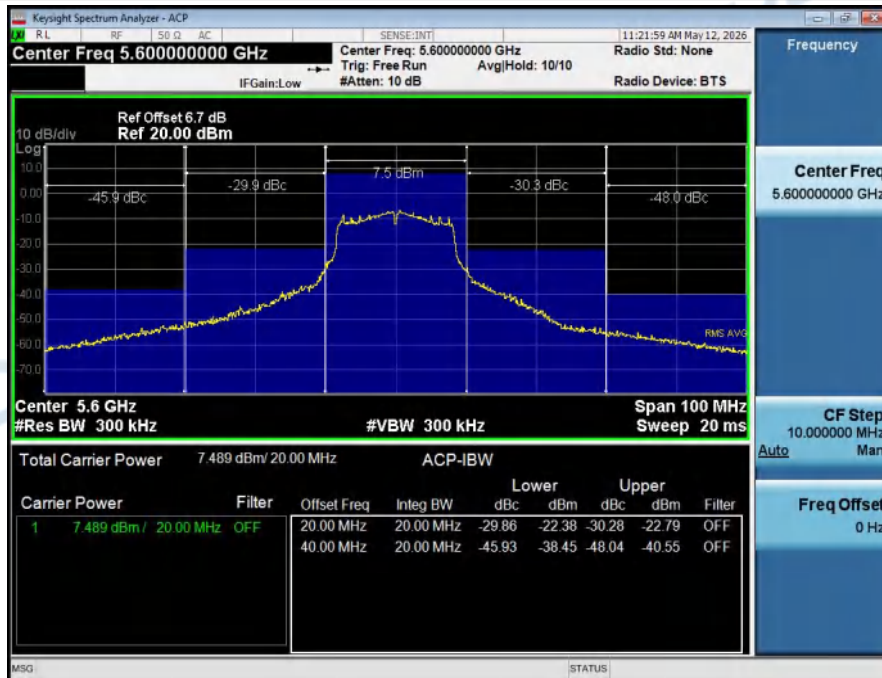


ACP_Measure_NVNT_ANT1_802_11ac(VHT20)_5720_20M

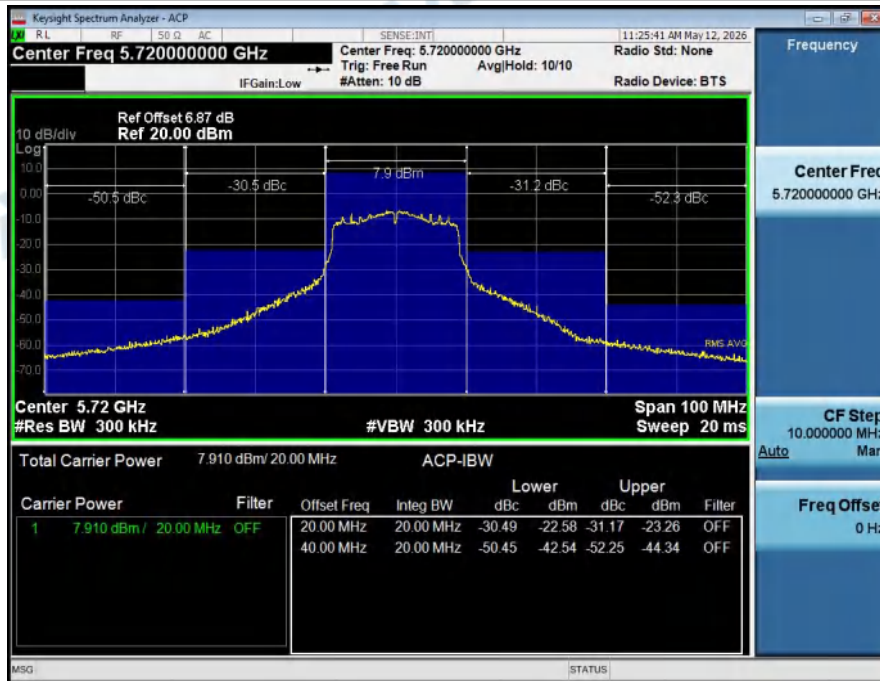


ACP_Measure_NVNT_ANT1_802_11n(HT40)_5510_40M



ACP_Measure_NVNT_ANT1_802_11n(HT40)_5590_40M

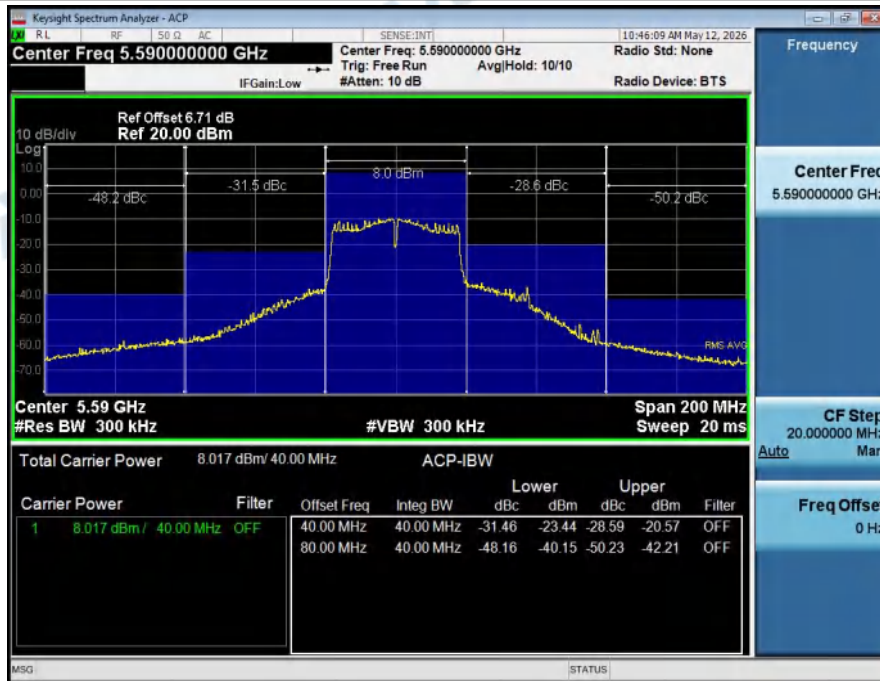

ACP_Measure_NVNT_ANT1_802_11n(HT40)_5710_40M

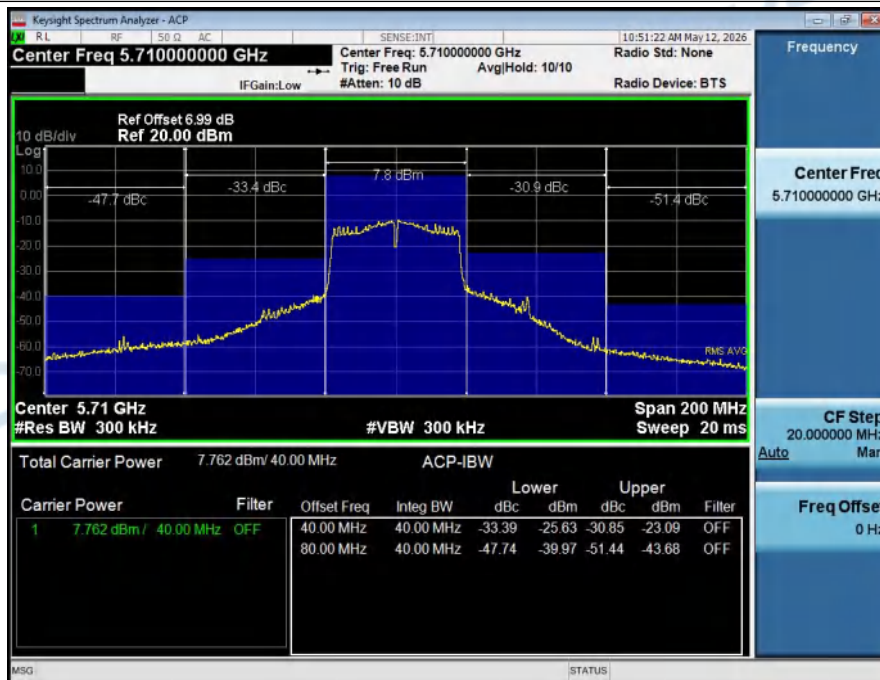

ACP_Measure_NVNT_ANT1_802_11ac(VHT40)_5510_40M



ACP_Measure_NVNT_ANT1_802_11ac(VHT40)_5590_40M




ACP_Measure_NVNT_ANT1_802_11ac(VHT40)_5710_40M




ACP_Measure_NVNT_ANT1_802_11ac(VHT80)_5530_80M



ACP_Measure_NVNT_ANT1_802_11ac(VHT80)_5610_80M

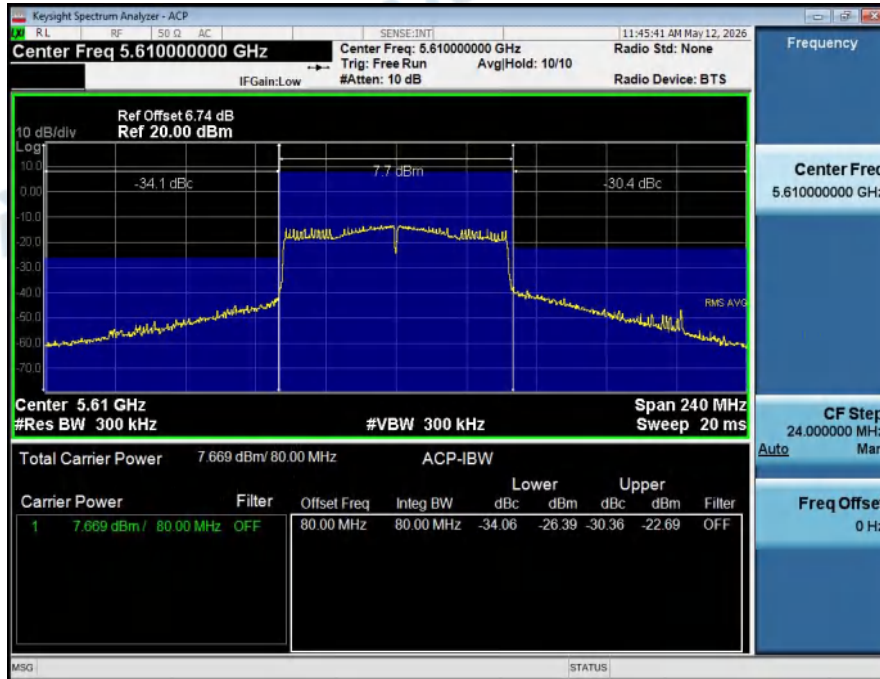


ACP_Measure_NVNT_ANT1_802_11ac(VHT80)_5690_80M

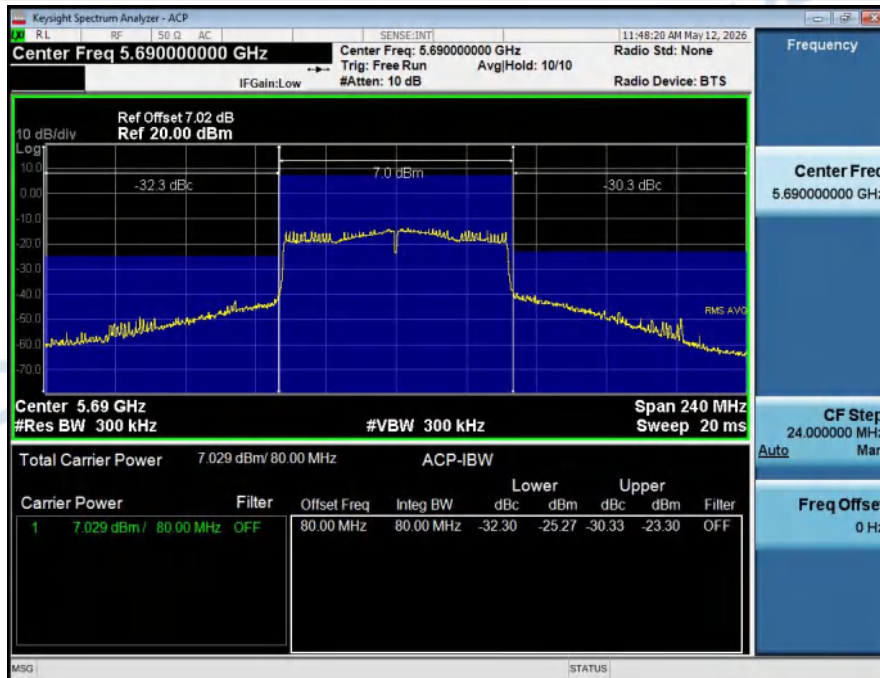


7. Frequency Tolerance

Condition	Antenna	Modulation	Frequency (MHz)	Test Frequency(MHz)	Frequency Tolerance(ppm)	Limit(ppm)	Result
NTNV	ANT1	802.11a	5500.00	5499.950	-9.091	±20	Pass
NTLV	ANT1	802.11a	5500.00	5499.950	-9.091	±20	Pass
NTHV	ANT1	802.11a	5500.00	5499.950	-9.091	±20	Pass
NTNV	ANT1	802.11a	5600.00	5599.954	-8.214	±20	Pass
NTLV	ANT1	802.11a	5600.00	5599.954	-8.214	±20	Pass
NTHV	ANT1	802.11a	5600.00	5599.954	-8.214	±20	Pass
NTNV	ANT1	802.11a	5720.00	5719.949	-8.916	±20	Pass
NTLV	ANT1	802.11a	5720.00	5719.949	-8.916	±20	Pass
NTHV	ANT1	802.11a	5720.00	5719.949	-8.916	±20	Pass


Frequency_Tolerance_NTNV_ANT1_802_11a_5500_20M

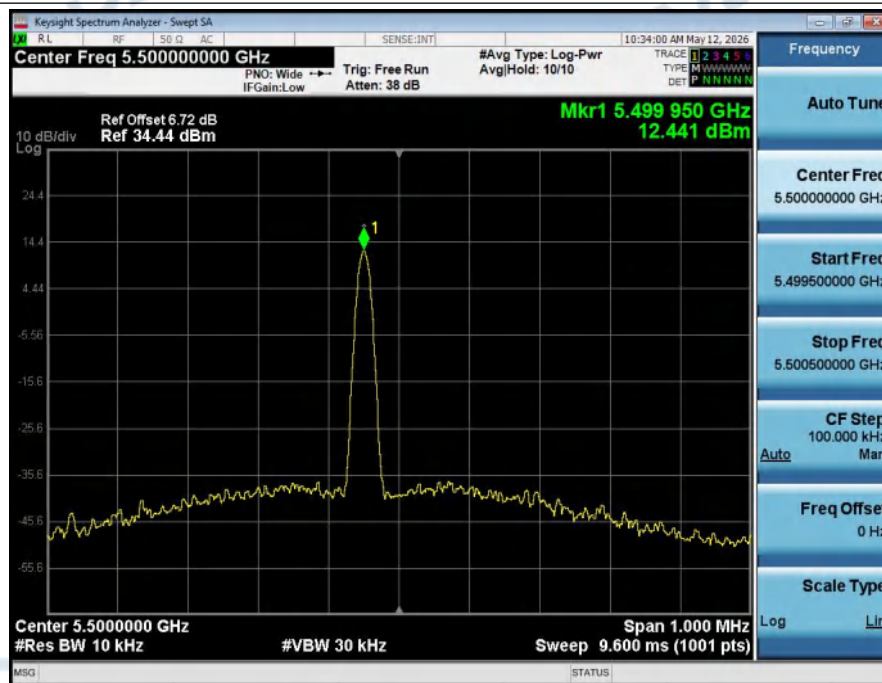


Frequency_Tolerance_NTLV_ANT1_802_11a_5500_20M

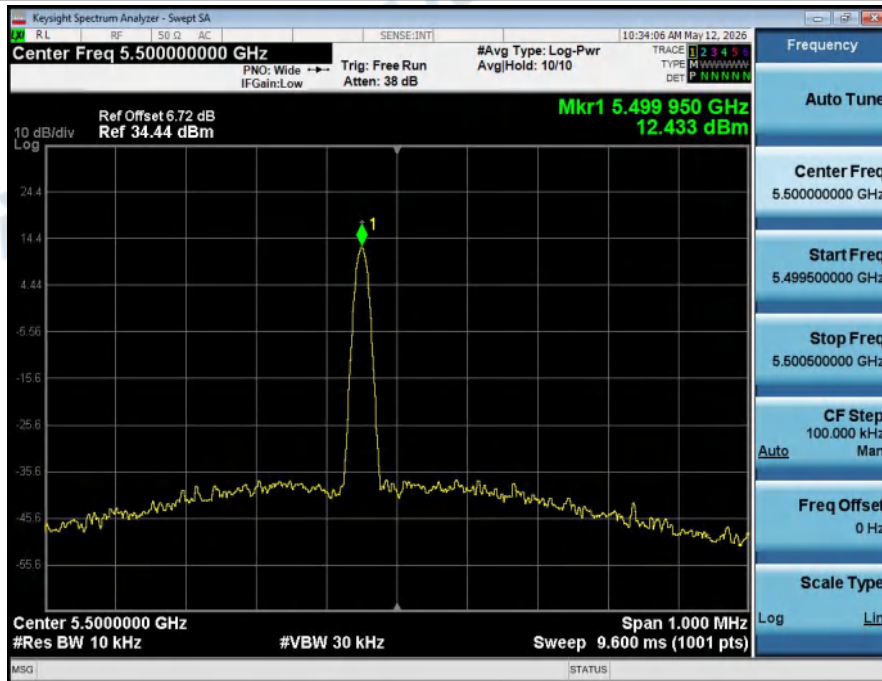


Frequency_Tolerance_NTHV_ANT1_802_11a_5500_20M

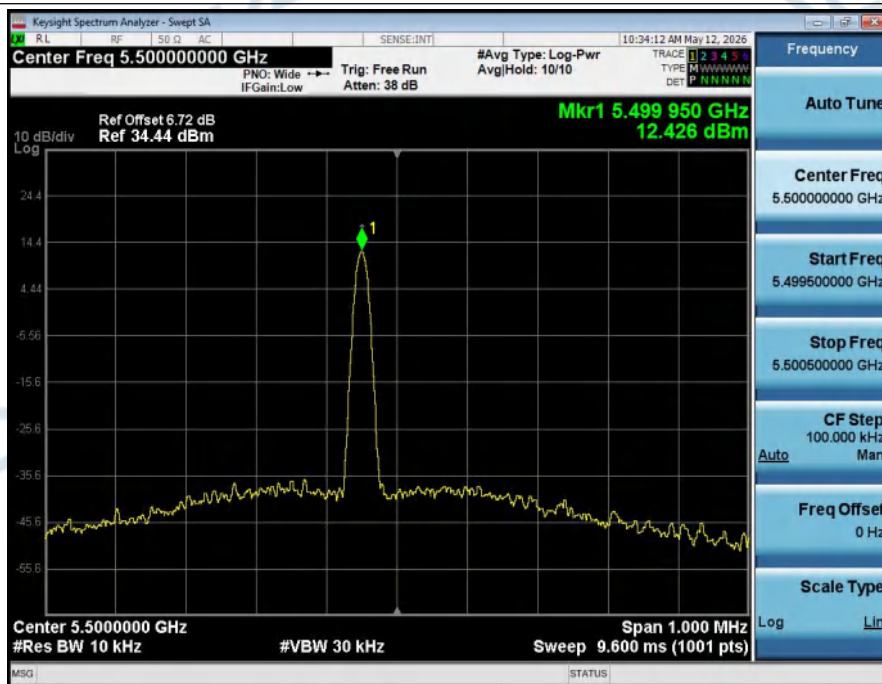


Frequency_Tolerance_NTNV_ANT1_802_11a_5600_20M

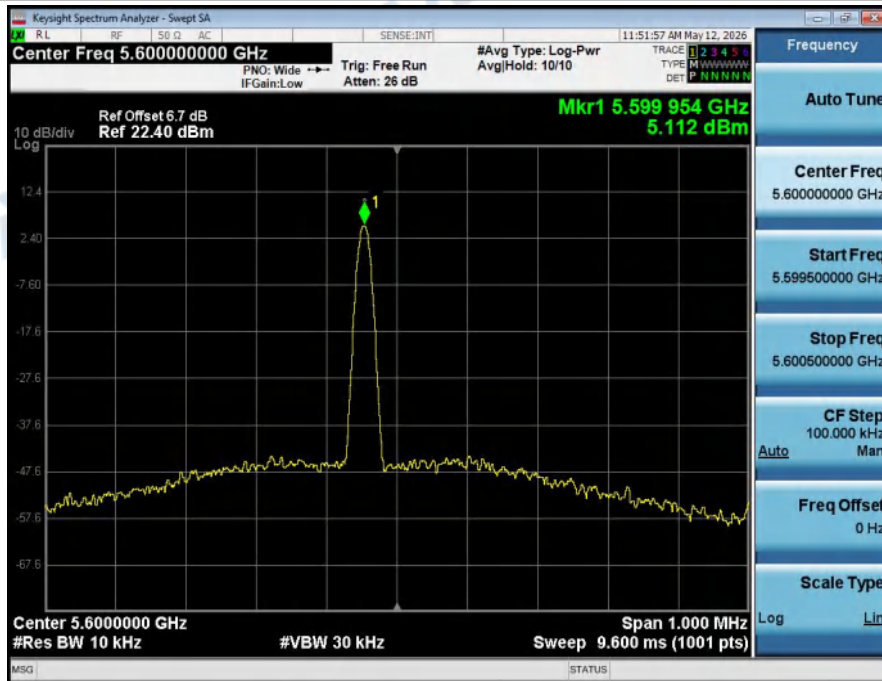


Frequency_Tolerance_NTLV_ANT1_802_11a_5600_20M

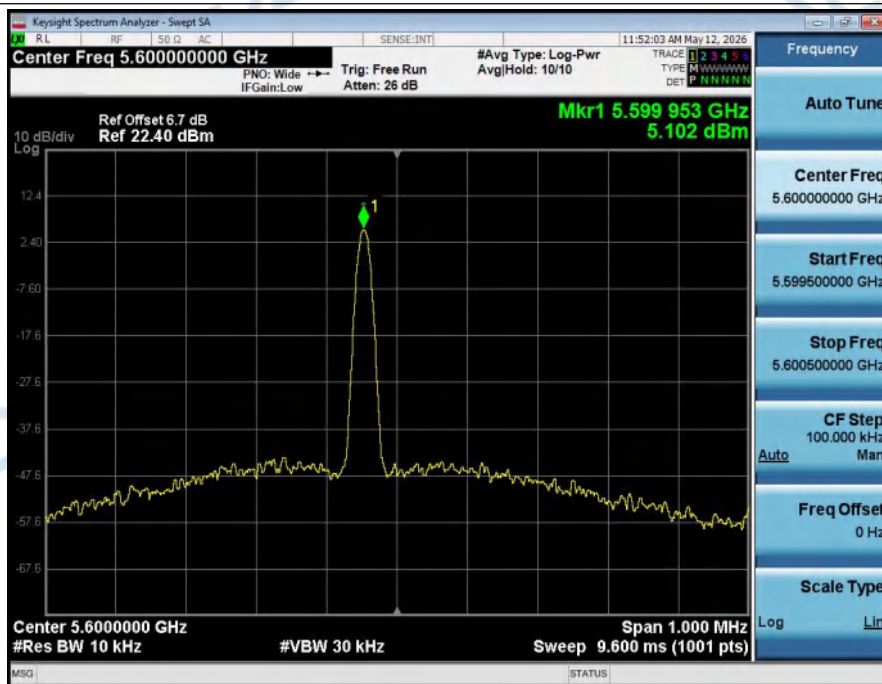


Frequency_Tolerance_NTHV_ANT1_802_11a_5600_20M

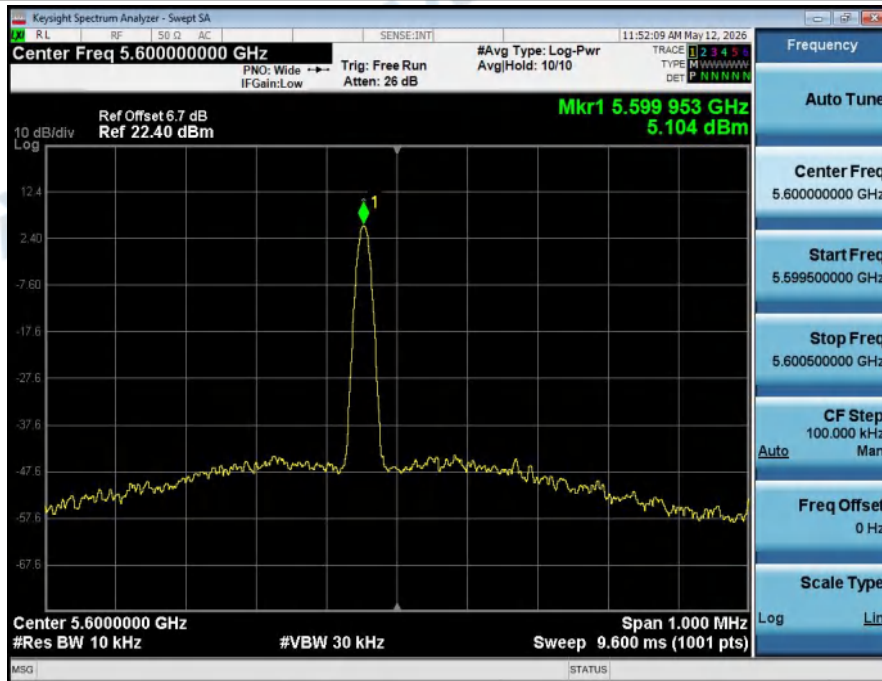


Frequency_Tolerance_NTNV_ANT1_802_11a_5720_20M

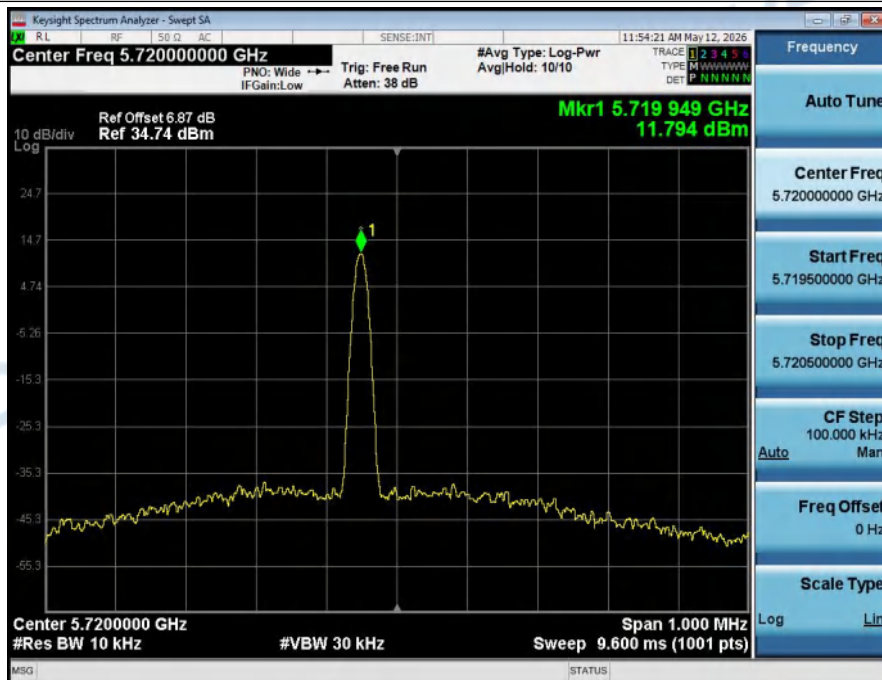

Frequency_Tolerance_NTLV_ANT1_802_11a_5720_20M

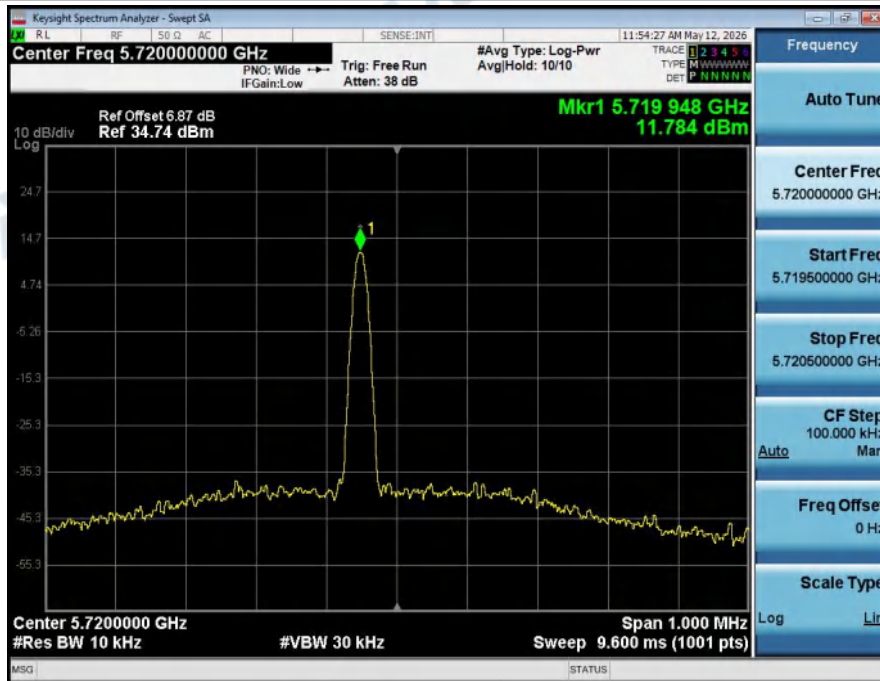


Frequency_Tolerance_NTHV_ANT1_802_11a_5720_20M

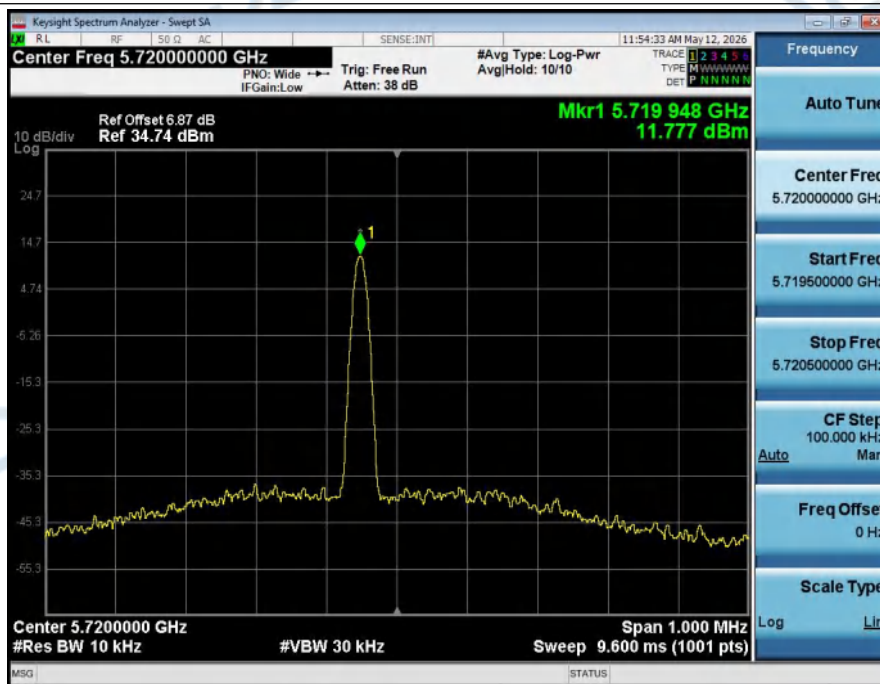


8. Secondary emission of radio wave

Condition	Mode	Channel	Range (MHz)	RBW (kHz)	Spur. Freq. (MHz)	Spur. Lev. (dBm)	Spur. Lev	Limit	Over 1/10 Limit	Read Lev.(dBm)	Read Lev.	Result
NVNT	802.11a	LCH	30.0~1000.0	100	833.16	-80.36	0.0092nW	4nW	NO	/	/	Pass
NVNT	802.11a	LCH	1000.0~13000.0	1000	2464.00	-69.44	0.1136nW	20nW	NO	/	/	Pass
NVNT	802.11a	MCH	30.0~1000.0	100	946.65	-84.54	0.0035nW	4nW	NO	/	/	Pass
NVNT	802.11a	MCH	1000.0~13000.0	1000	2440.00	-68.30	0.1480nW	20nW	NO	/	/	Pass
NVNT	802.11a	HCH	30.0~1000.0	100	830.25	-66.00	0.2514nW	4nW	NO	/	/	Pass
NVNT	802.11a	HCH	1000.0~13000.0	1000	12496.00	-69.29	0.1176nW	20nW	NO	/	/	Pass
NVNT	802.11n(HT20)	LCH	30.0~1000.0	100	833.16	-68.26	0.1491nW	4nW	NO	/	/	Pass
NVNT	802.11n(HT20)	LCH	1000.0~13000.0	1000	12052.00	-69.24	0.1191nW	20nW	NO	/	/	Pass
NVNT	802.11n(HT20)	MCH	30.0~1000.0	100	827.34	-71.70	0.0676nW	4nW	NO	/	/	Pass
NVNT	802.11n(HT20)	MCH	1000.0~13000.0	1000	3628.00	-69.32	0.1170nW	20nW	NO	/	/	Pass
NVNT	802.11n(HT20)	HCH	30.0~1000.0	100	833.16	-60.50	0.8913nW	4nW	NO	/	/	Pass
NVNT	802.11n(HT20)	HCH	1000.0~13000.0	1000	12040.00	-69.54	0.1110nW	20nW	NO	/	/	Pass
NVNT	802.11ac(VHT20)	LCH	30.0~1000.0	100	831.22	-66.34	0.2324nW	4nW	NO	/	/	Pass
NVNT	802.11ac(VHT20)	LCH	1000.0~13000.0	1000	3664.00	-70.23	0.0947nW	20nW	NO	/	/	Pass
NVNT	802.11ac(VHT20)	MCH	30.0~1000.0	100	827.34	-64.25	0.3759nW	4nW	NO	/	/	Pass
NVNT	802.11ac(VHT20)	MCH	1000.0~13000.0	1000	11548.00	-69.46	0.1132nW	20nW	NO	/	/	Pass
NVNT	802.11ac(VHT20)	HCH	30.0~1000.0	100	828.31	-65.17	0.3044nW	4nW	NO	/	/	Pass
NVNT	802.11ac(VHT20)	HCH	1000.0~13000.0	1000	12184.00	-68.49	0.1417nW	20nW	NO	/	/	Pass
NVNT	802.11n(HT40)	LCH	30.0~1000.0	100	828.31	-64.56	0.3496nW	4nW	NO	/	/	Pass
NVNT	802.11n(HT40)	LCH	1000.0~13000.0	1000	12532.00	-70.12	0.0972nW	20nW	NO	/	/	Pass
NVNT	802.11n(HT40)	MCH	30.0~1000.0	100	827.34	-64.45	0.3591nW	4nW	NO	/	/	Pass
NVNT	802.11n(HT40)	MCH	1000.0~13000.0	1000	12040.00	-68.86	0.1298nW	20nW	NO	/	/	Pass
NVNT	802.11n(HT40)	HCH	30.0~1000.0	100	828.31	-62.33	0.5854nW	4nW	NO	/	/	Pass
NVNT	802.11n(HT40)	HCH	1000.0~13000.0	1000	12004.00	-69.77	0.1055nW	20nW	NO	/	/	Pass
NVNT	802.11ac(VHT40)	LCH	30.0~1000.0	100	825.40	-62.14	0.6110nW	4nW	NO	/	/	Pass
NVNT	802.11ac(VHT40)	LCH	1000.0~13000.0	1000	12088.00	-69.80	0.1046nW	20nW	NO	/	/	Pass
NVNT	802.11ac(VHT40)	MCH	30.0~1000.0	100	881.66	-84.33	0.0036nW	4nW	NO	/	/	Pass
NVNT	802.11ac(VHT40)	MCH	1000.0~13000.0	1000	3652.00	-69.51	0.1119nW	20nW	NO	/	/	Pass
NVNT	802.11ac(VHT40)	HCH	30.0~1000.0	100	824.43	-84.10	0.0038nW	4nW	NO	/	/	Pass
NVNT	802.11ac(VHT40)	HCH	1000.0~13000.0	1000	3640.00	-70.30	0.0932nW	20nW	NO	/	/	Pass
NVNT	802.11ac(VHT80)	LCH	30.0~1000.0	100	718.70	-60.81	0.8303nW	4nW	NO	/	/	Pass
NVNT	802.11ac(VHT80)	LCH	1000.0~13000.0	1000	2476.00	-53.54	4.4303nW	20nW	NO	/	/	Pass
NVNT	802.11ac(VHT80)	MCH	30.0~1000.0	100	913.67	-61.25	0.7499nW	4nW	NO	/	/	Pass
NVNT	802.11ac(VHT80)	MCH	1000.0~13000.0	1000	2464.00	-50.99	7.9562nW	20nW	NO	/	/	Pass
NVNT	802.11ac(VHT80)	HCH	30.0~1000.0	100	833.16	-73.13	0.0486nW	4nW	NO	/	/	Pass
NVNT	802.11ac(VHT80)	HCH	1000.0~13000.0	1000	2608.00	-54.65	3.4257nW	20nW	NO	/	/	Pass


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11a_LCH

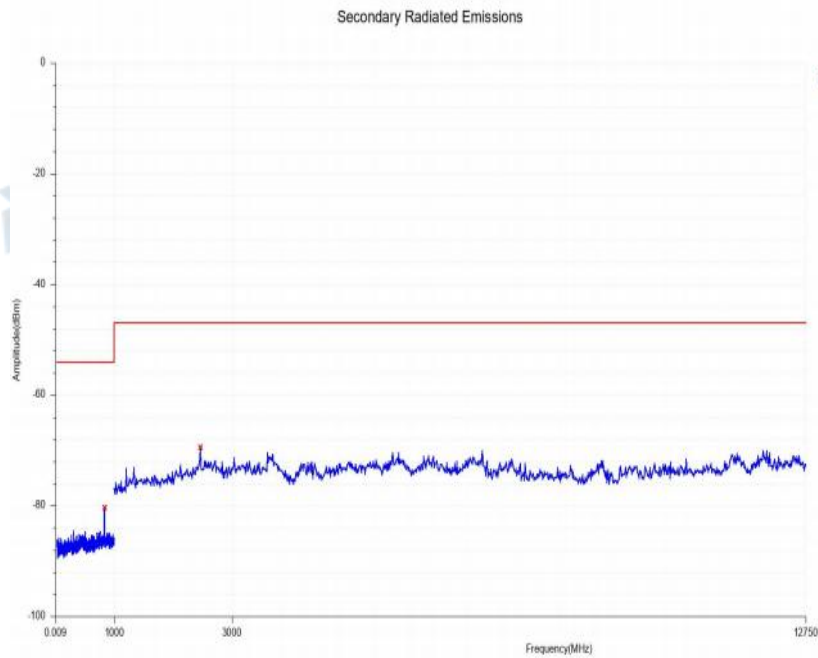


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11a_MCH

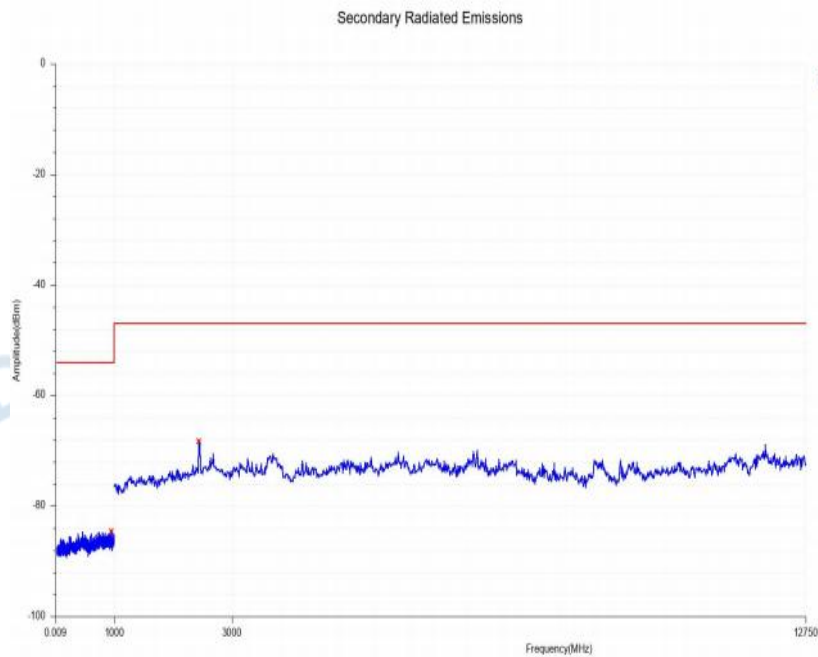


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11a_HCH

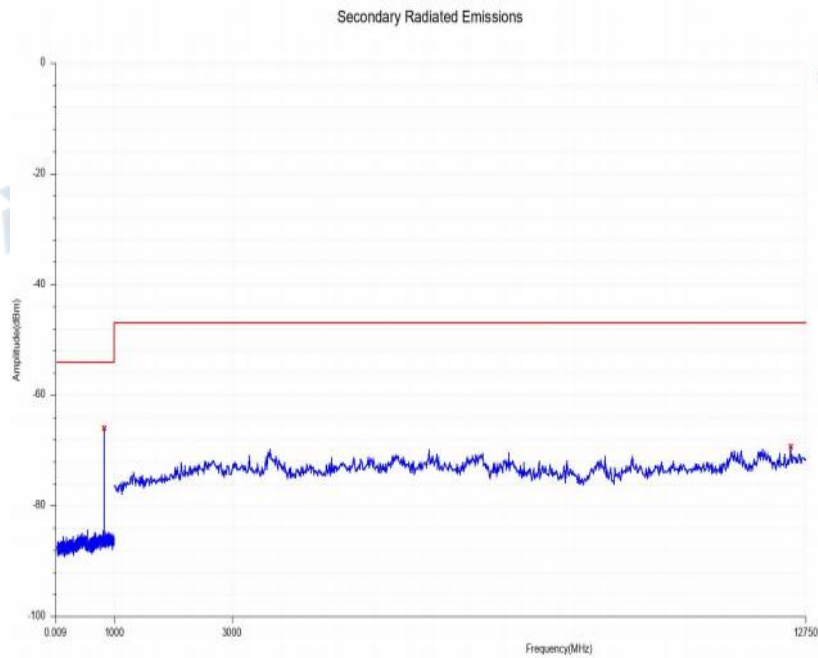


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11n(HT20)_LCH

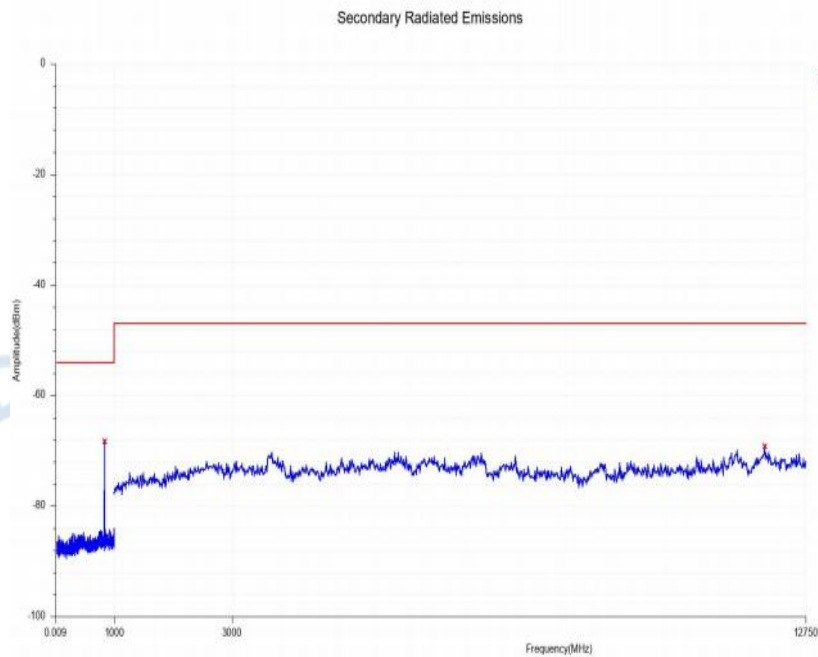


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11n(HT20)_MCH

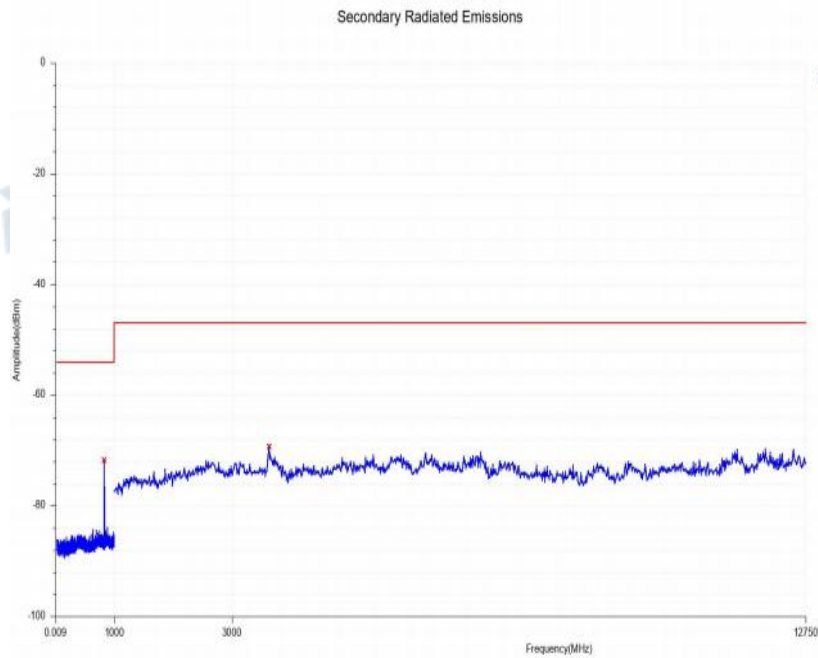


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11n(HT20)_HCH

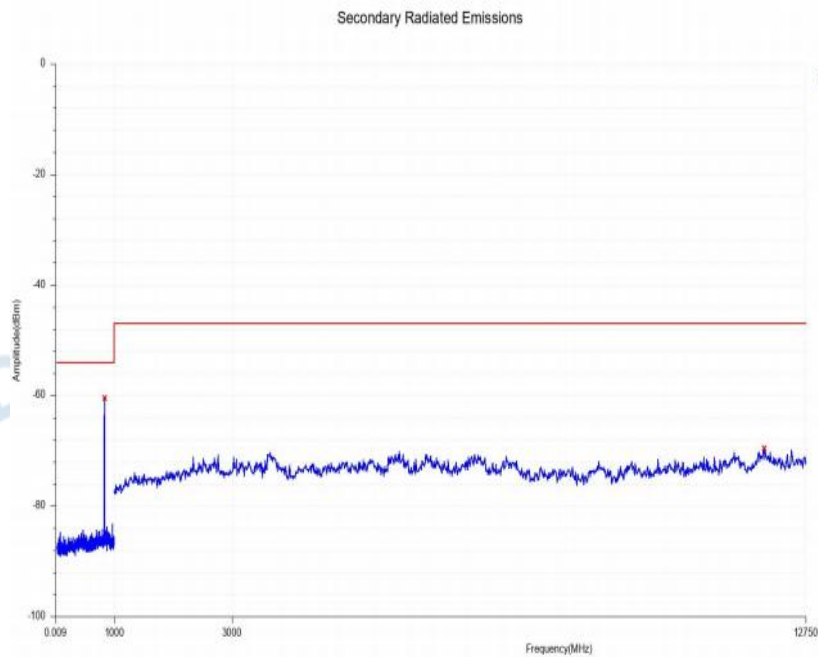


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11ac(VHT20)_LCH

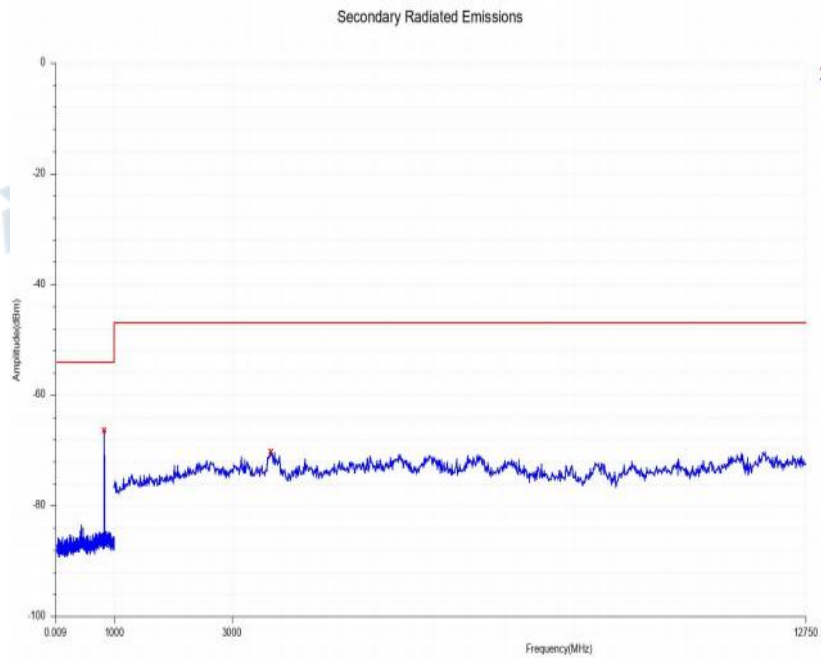


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11ac(VHT20)_MCH

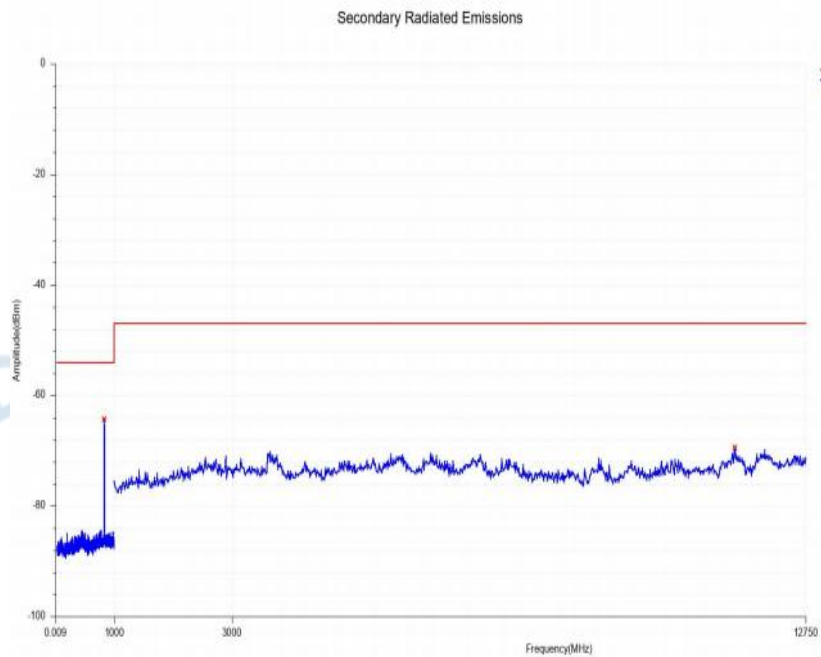


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11ac(VHT20)_HCH

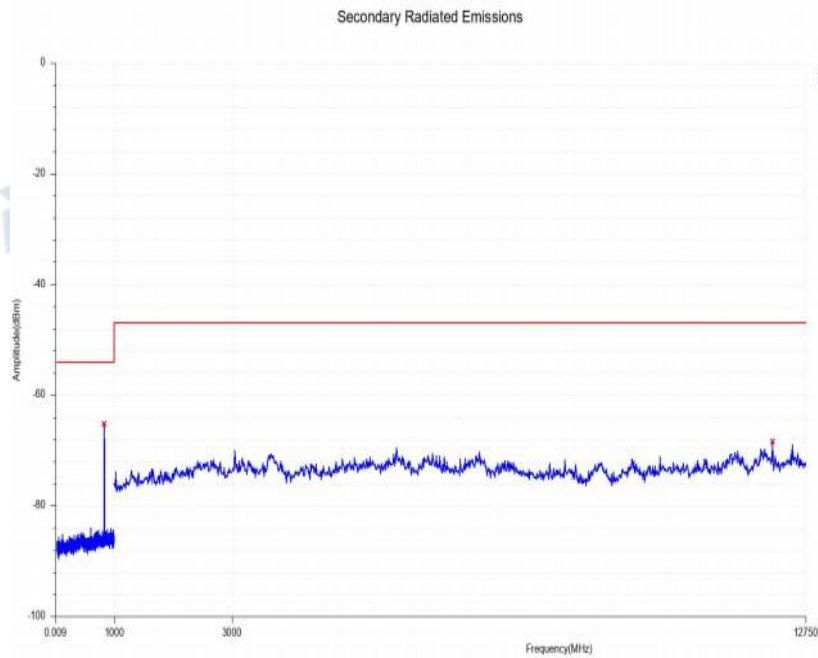


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11n(HT40)_LCH

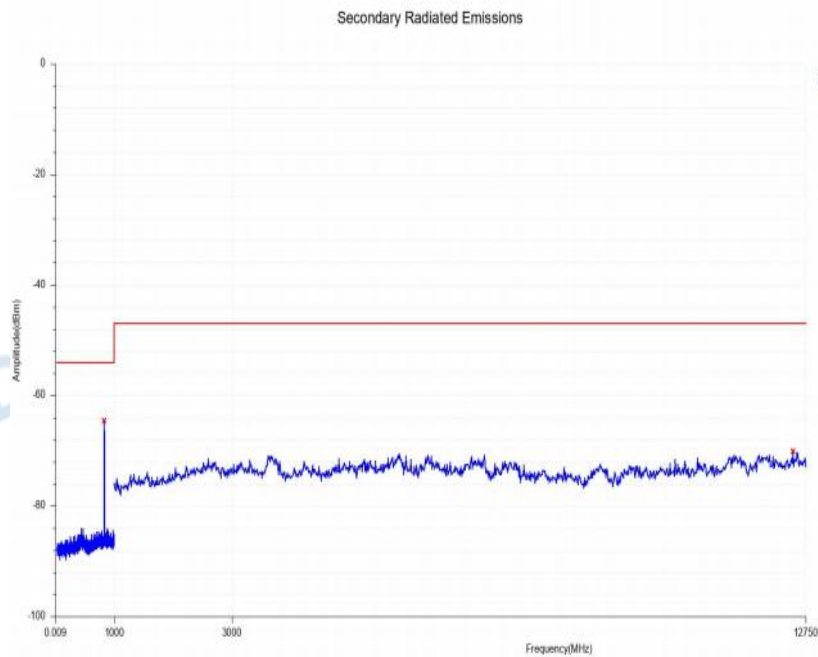


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11n(HT40)_MCH

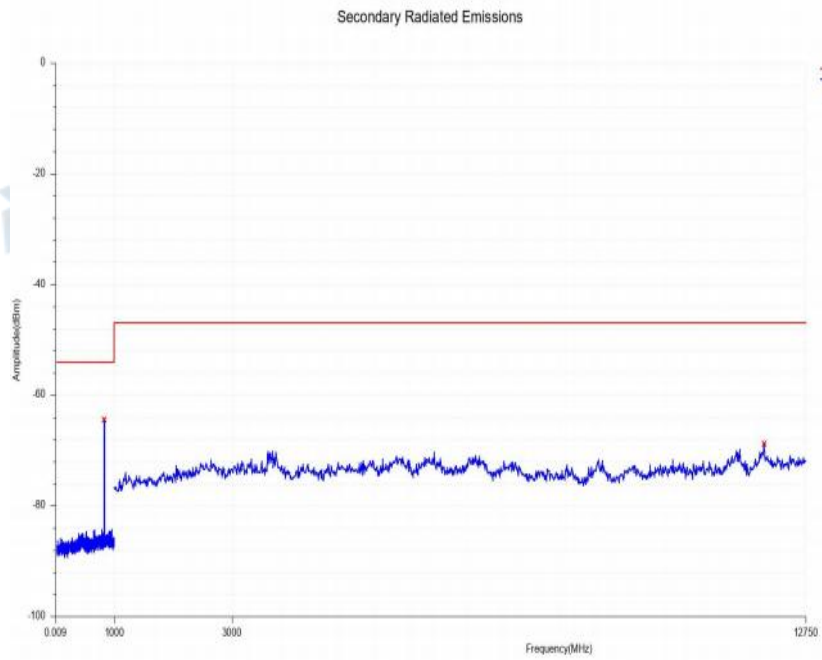


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11n(HT40)_HCH

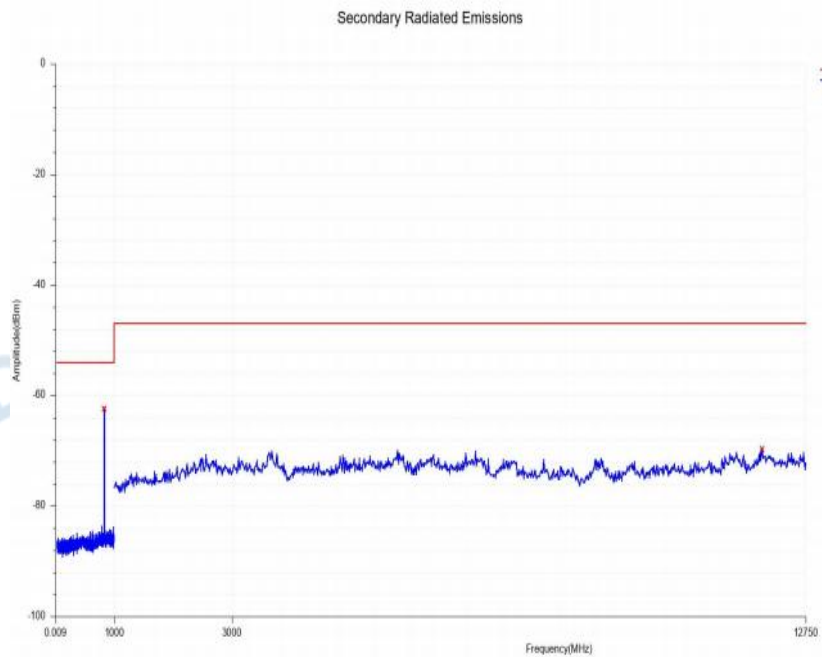


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11ac(VHT40)_LCH

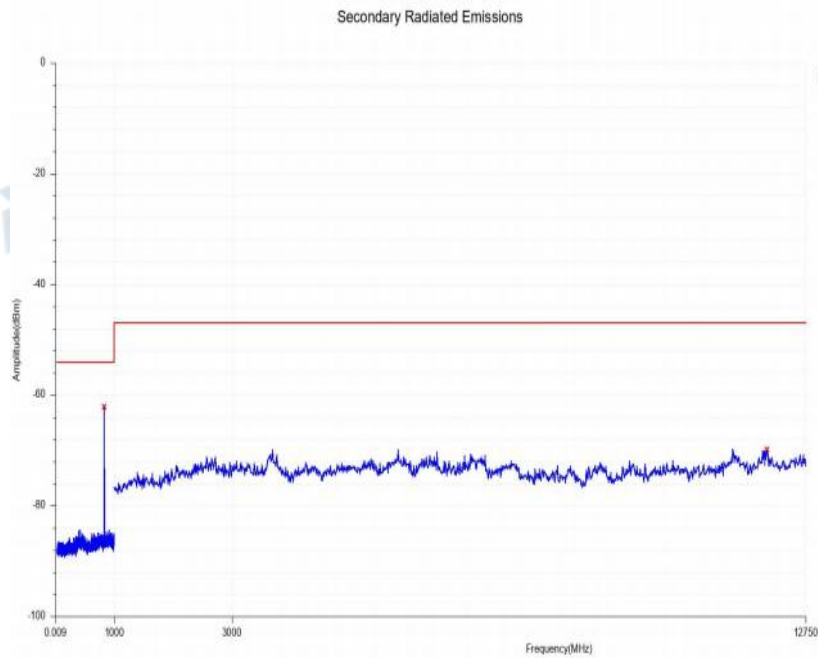


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11ac(VHT40)_MCH

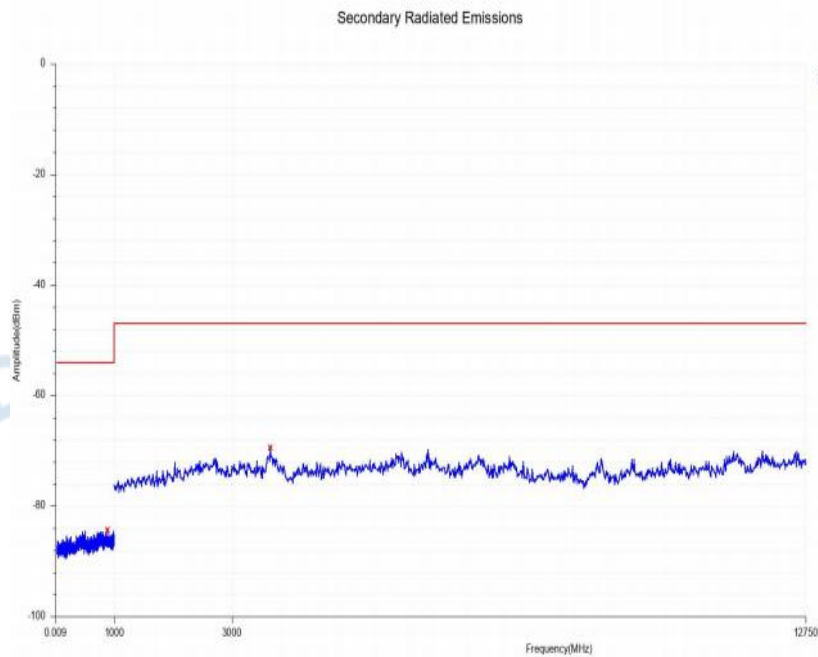


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11ac(VHT40)_HCH

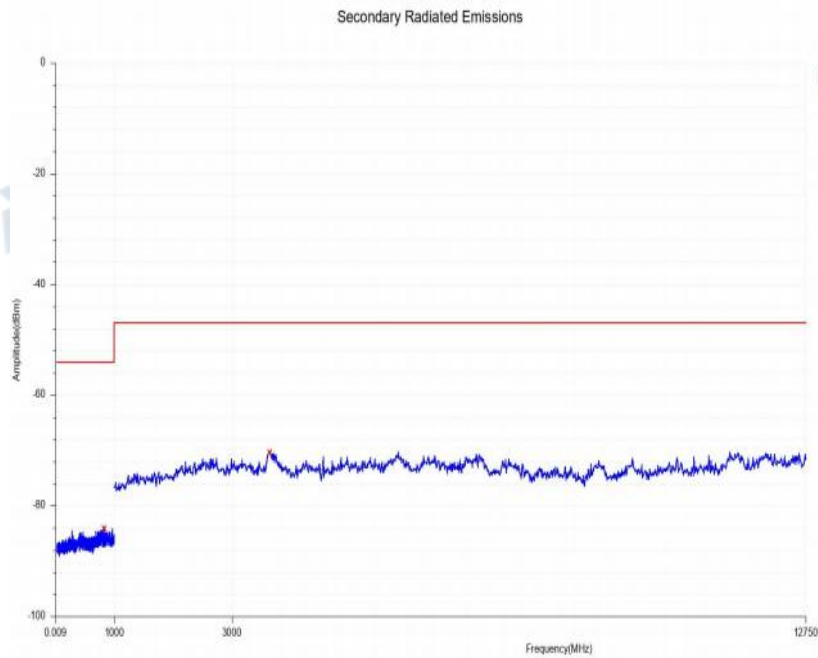


Secondary_emission_of_radio_wave_NVNT_ANT1_802_11ac(VHT80)_LCH

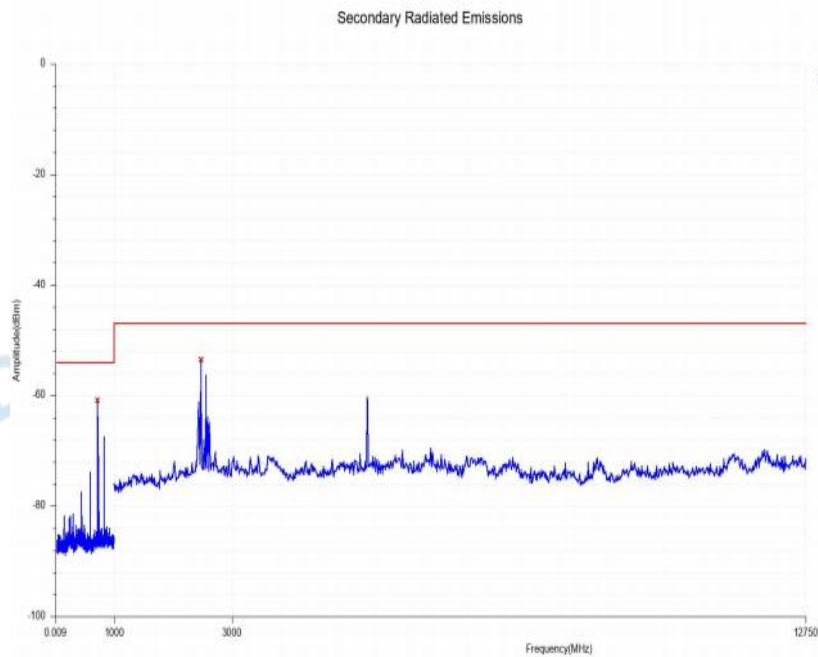

Secondary_emission_of_radio_wave_NVNT_ANT1_802_11ac(VHT80)_MCH

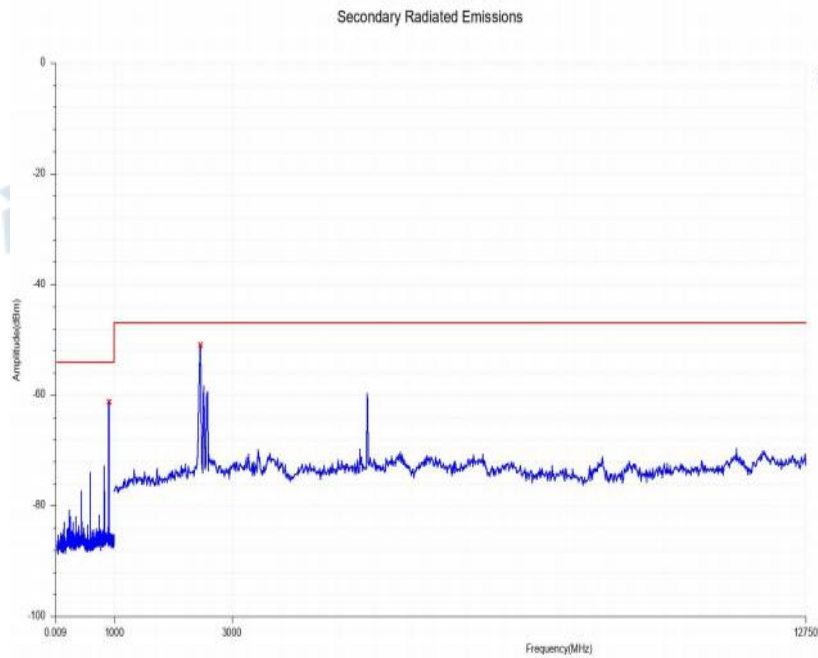

Secondary_emission_of_radio_wave_NVNT_ANT1_802_11ac(VHT80)_HCH

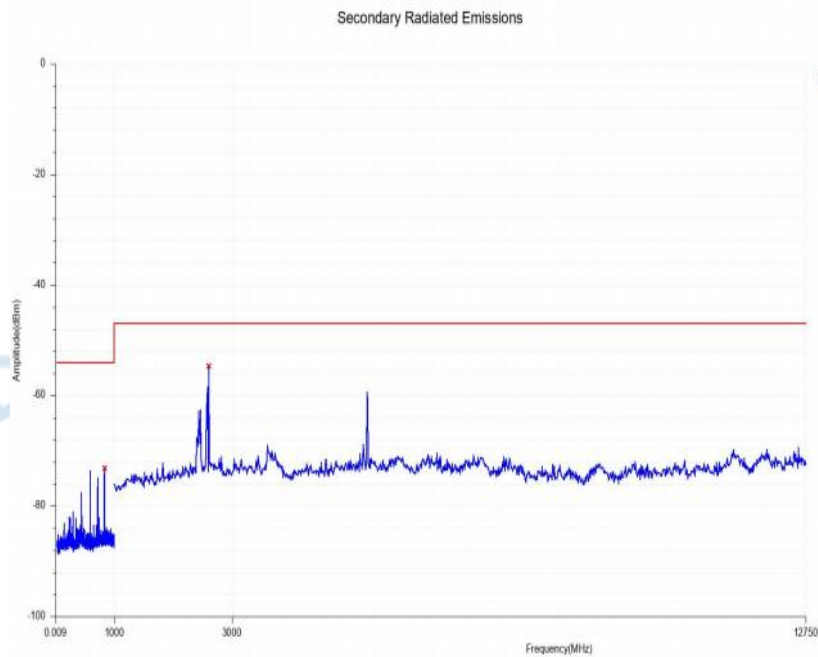

***** End of Report *****