Appendix RF test data for BLE

複製禁止

1. Frequency Error

1.1 Test Result

1.1.1 Ant1

Ant1							
ENV	Mode	TX Type	Frequency (MHz)	Measured Frequency (MHz)	Tolerance (ppm)		Verdict
					Result	Limit	
NTNV	Carrier Wave	SISO	2402	2402.000	0.00	-50 to 50	Pass
			2480	2479.999	-0.40	-50 to 50	Pass
NTLV	Carrier Wave	SISO	2402	2402.000	0.00	-50 to 50	Pass
			2480	2480.000	0.00	-50 to 50	Pass
NTHV	Carrier Wave	SISO	2402	2402.000	0.00	-50 to 50	Pass
			2480	2479.999	-0.40	-50 to 50	Pass

複製禁止

1.2 Test Graph

1.2.1 Ant1

Frequency Error_NTNV_Carrier Wave_2402MHz_Ant1_NTNV

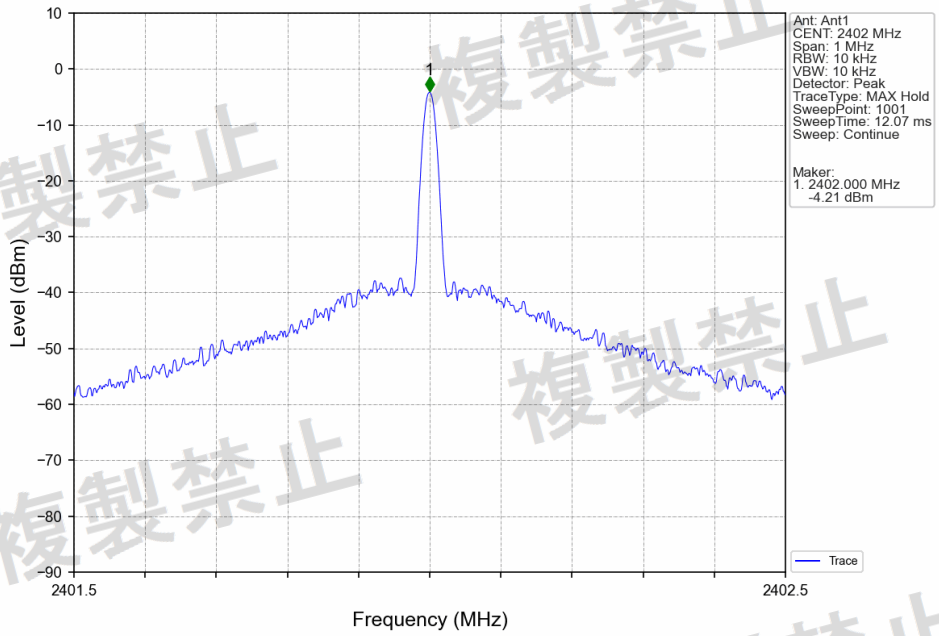

Frequency Error_NTNV_Carrier Wave_2480MHz_Ant1_NTNV

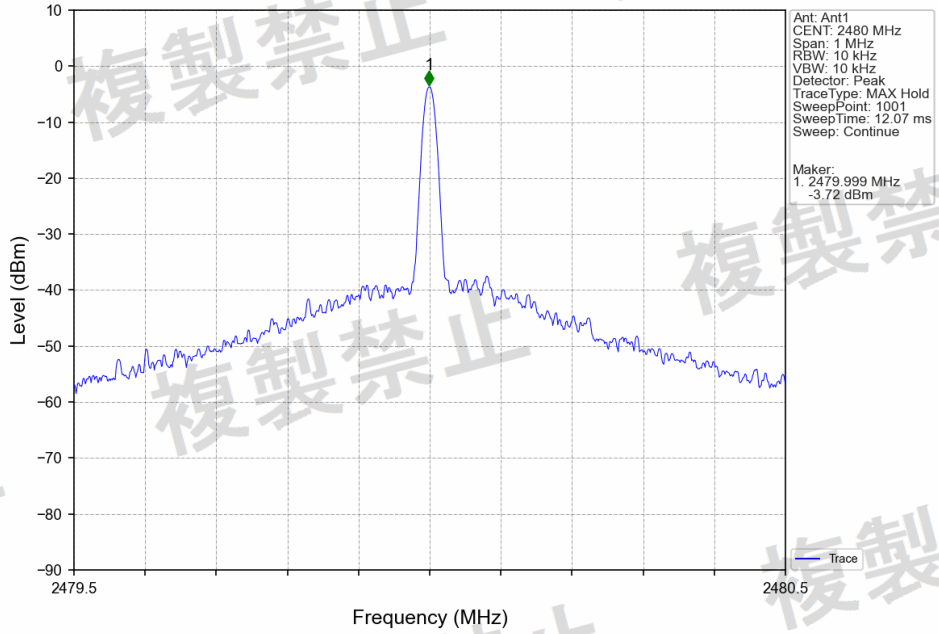

Frequency Error_NTLV_Carrier Wave_2402MHz_Ant1_NTLV

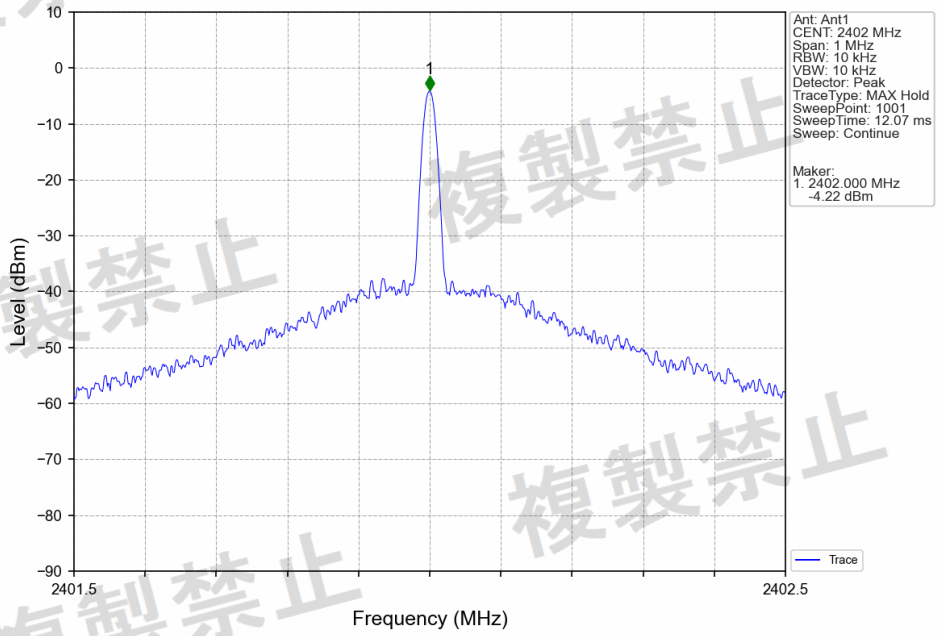

Frequency Error_NTLV_Carrier Wave_2480MHz_Ant1_NTLV

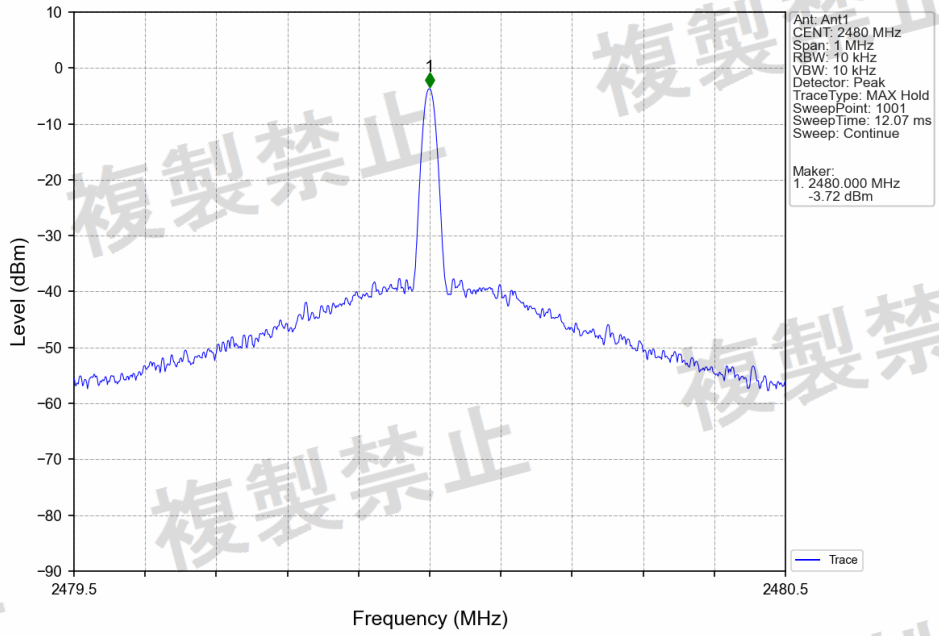

Frequency Error_NTHV_Carrier Wave_2402MHz_Ant1_NTHV

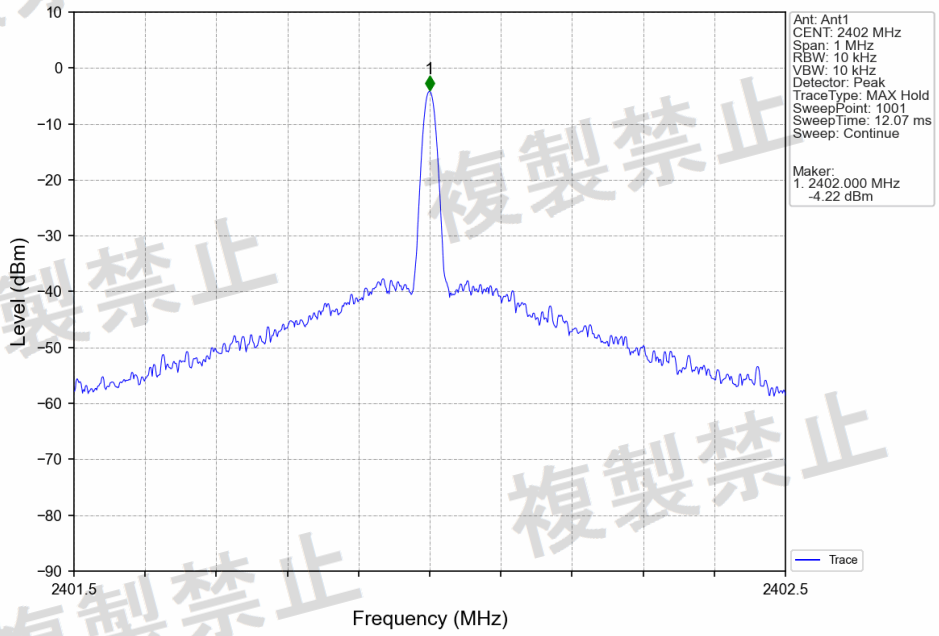

Frequency Error_NTHV_Carrier Wave_2480MHz_Ant1_NTHV

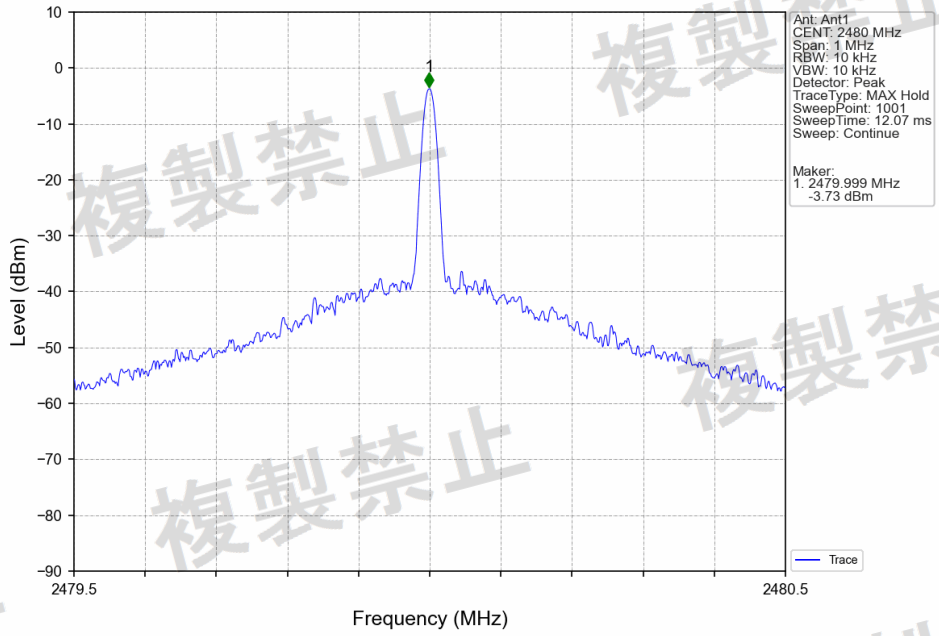

2. Occupied Bandwidth

2.1 Test Result

2.1.1 OBW

ENV	Mode	TX Type	Frequency (MHz)	99% Occupied Bandwidth (MHz)		Verdict
				ANT1	Limit	
NTNV	1M	SISO	2402	1.231	<=26	Pass
			2480	1.228	<=26	Pass
	2M	SISO	2402	2.192	<=26	Pass
			2480	2.191	<=26	Pass
NTLV	1M	SISO	2402	1.231	<=26	Pass
			2480	1.230	<=26	Pass
	2M	SISO	2402	2.192	<=26	Pass
			2480	2.191	<=26	Pass
NTHV	1M	SISO	2402	1.230	<=26	Pass
			2480	1.230	<=26	Pass
	2M	SISO	2402	2.194	<=26	Pass
			2480	2.191	<=26	Pass

複製禁止

2.2 Test Graph

2.2.1 OBW

1M_2402MHz_Ant1_NTNV

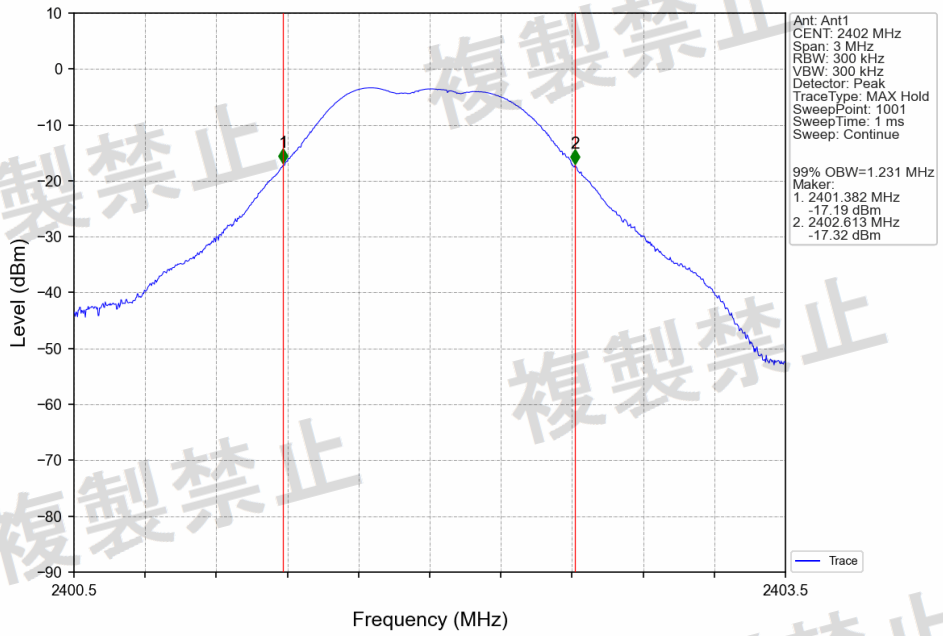

1M_2480MHz_Ant1_NTNV

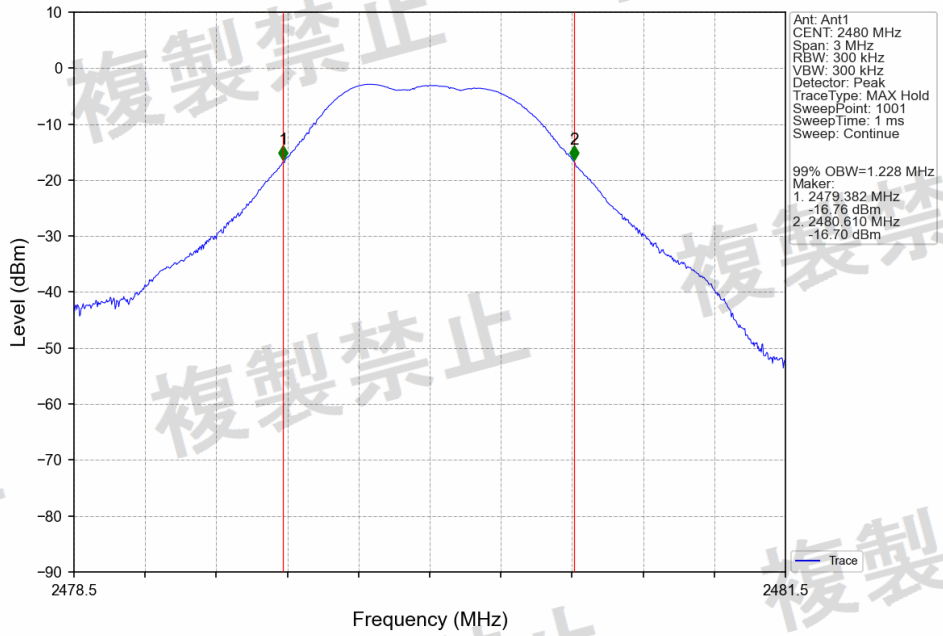

複製禁止

2M_2402MHz_Ant1_NTNV

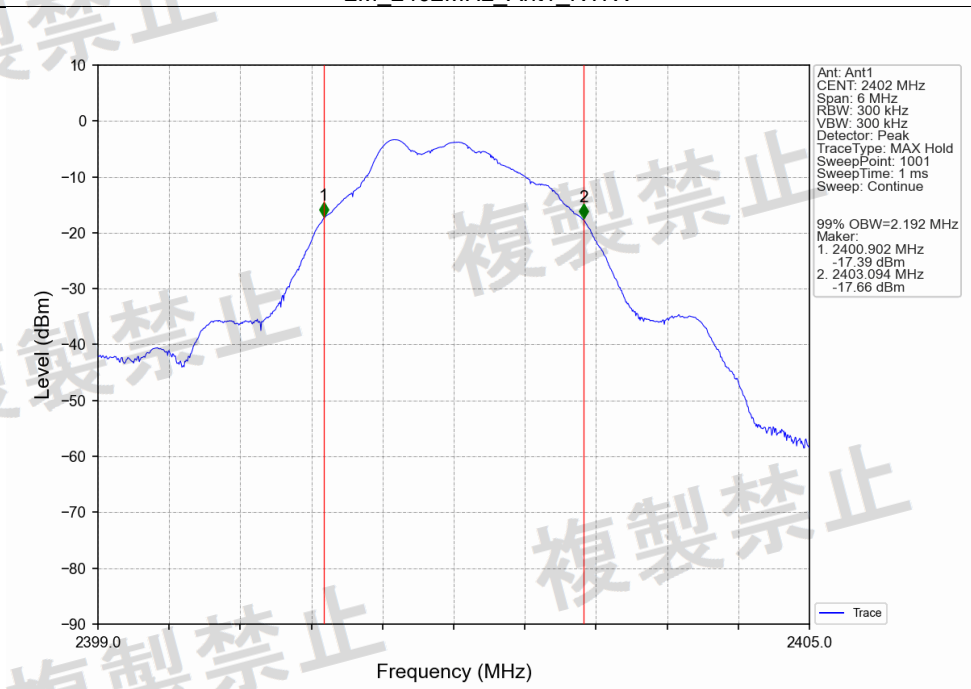

2M_2480MHz_Ant1_NTNV

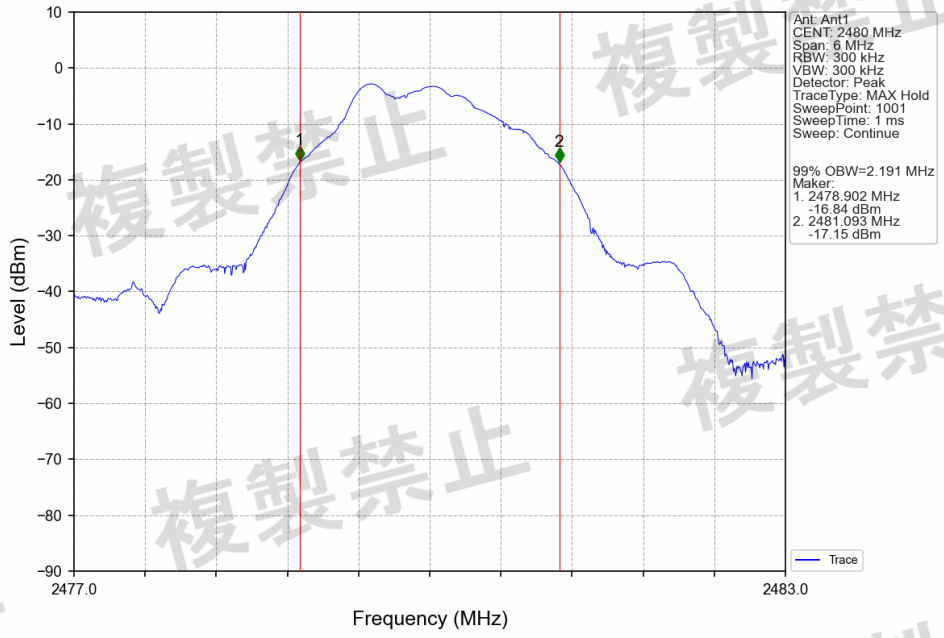

1M_2402MHz_Ant1_NTLV

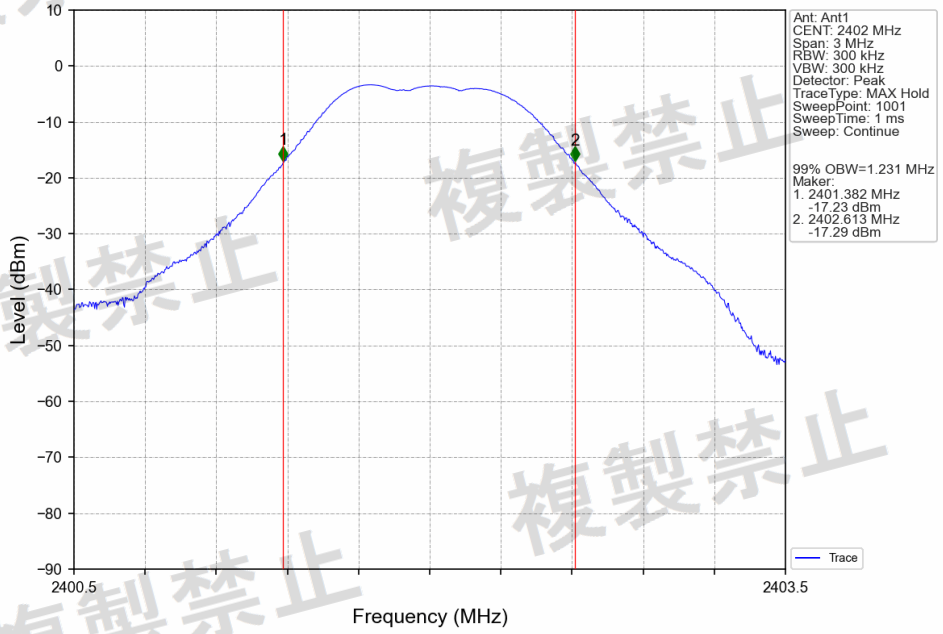

1M_2480MHz_Ant1_NTLV

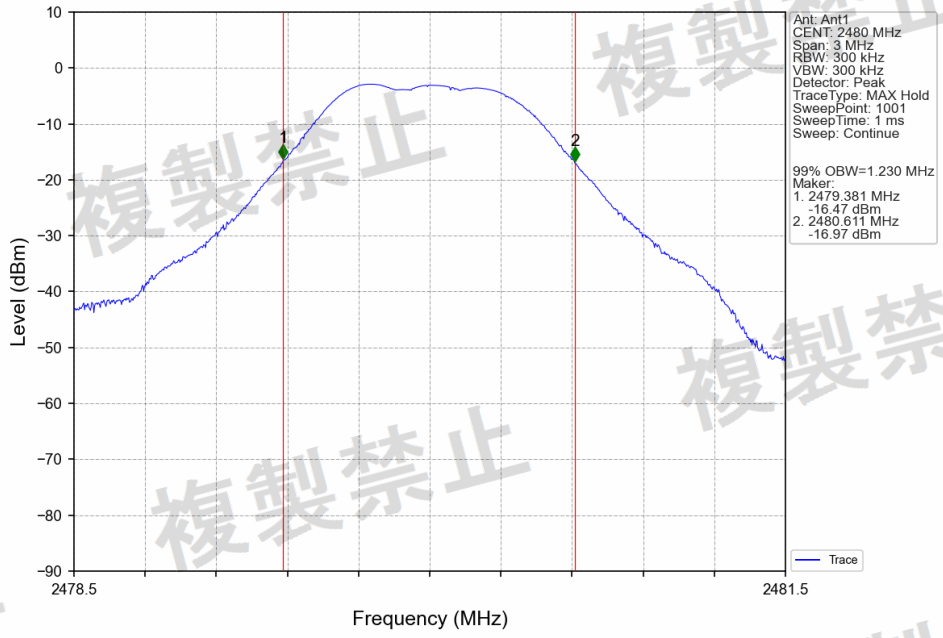

2M_2402MHz_Ant1_NTLV

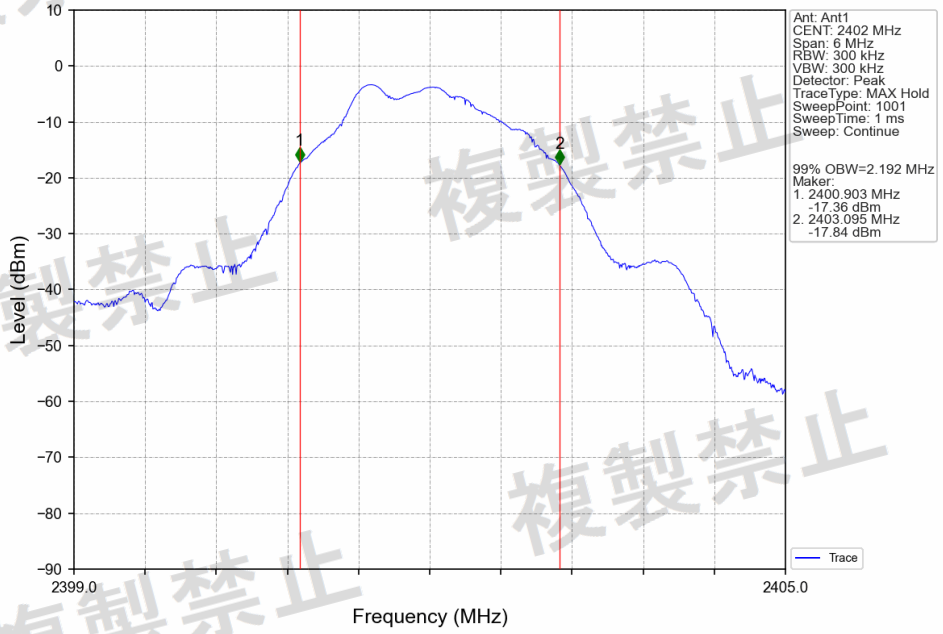

2M_2480MHz_Ant1_NTLV

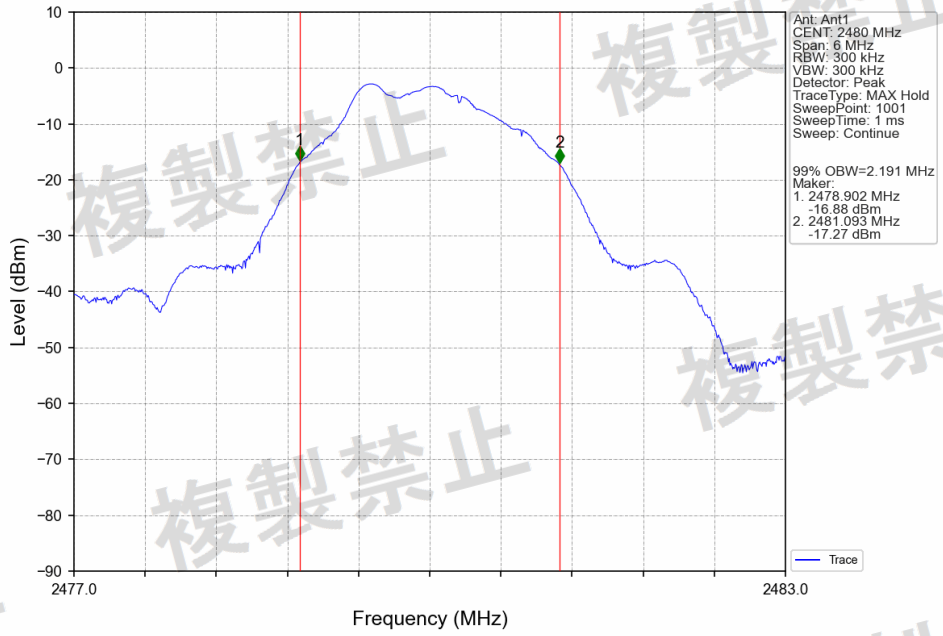

1M_2402MHz_Ant1_NTHV

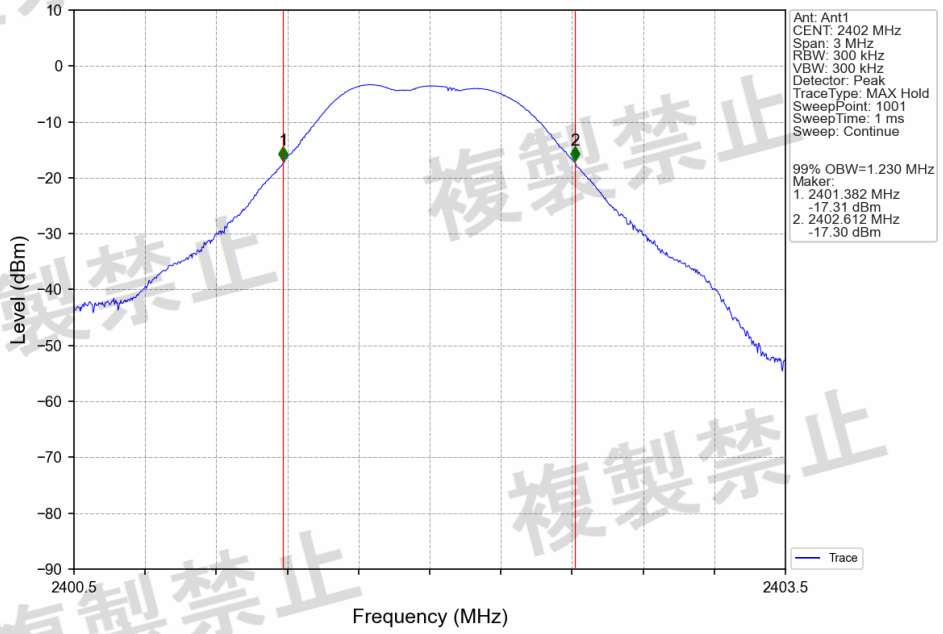

1M_2480MHz_Ant1_NTHV

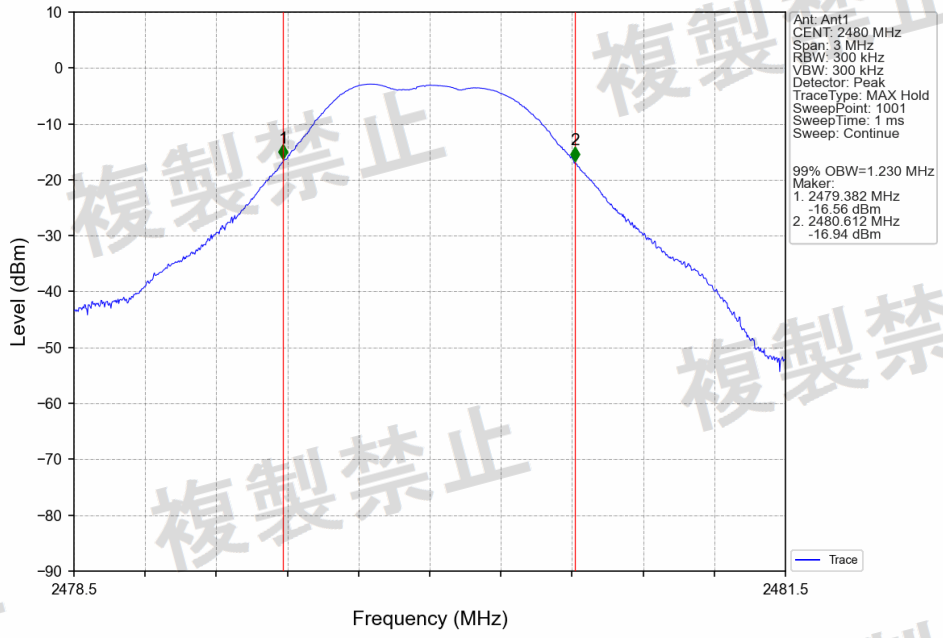

2M_2402MHz_Ant1_NTHV

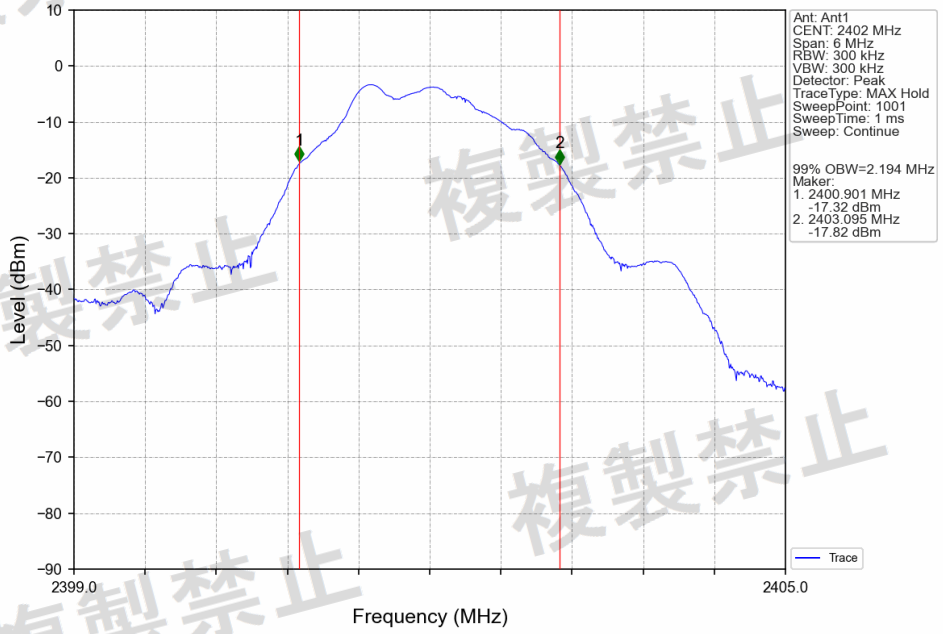

2M_2480MHz_Ant1_NTHV

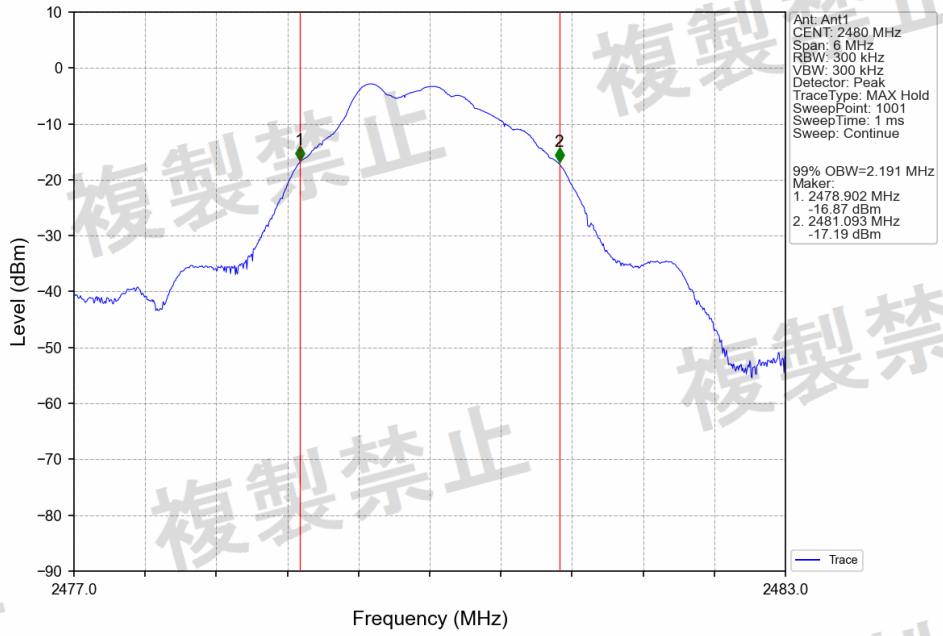

3. Antenna Power

3.1 Test Result

3.1.1 Power

ENV	Mode	TX Type	Frequency (MHz)	ANT	Antenna Power (mW)		Nominal Power (mW)	Tolerance (%)		Verdict
					Measured	Limit		Measured	Limit	
NTNV	1M	SISO	2402	1	0.406	<=10.00	0.450	-9.78	<=20	Pass
			2480	1	0.446	<=10.00	0.450	-0.89	<=20	Pass
	2M	SISO	2402	1	0.376	<=10.00	0.400	-6.00	<=20	Pass
			2480	1	0.311	<=10.00	0.400	-22.25	<=20	Pass
NTLV	1M	SISO	2402	1	0.401	<=10.00	0.450	-10.89	<=20	Pass
			2480	1	0.442	<=10.00	0.450	-1.78	<=20	Pass
	2M	SISO	2402	1	0.371	<=10.00	0.400	-7.25	<=20	Pass
			2480	1	0.408	<=10.00	0.400	2.00	<=20	Pass
NTHV	1M	SISO	2402	1	0.377	<=10.00	0.450	-16.22	<=20	Pass
			2480	1	0.447	<=10.00	0.450	-0.67	<=20	Pass
	2M	SISO	2402	1	0.380	<=10.00	0.400	-5.00	<=20	Pass
			2480	1	0.400	<=10.00	0.400	0.00	<=20	Pass

3.1.2 EIRP

ENV	Mode	TX Type	Frequency (MHz)	ANT	Gain (dBi)	EIRP (dBm)		Verdict
						Result	Limit	
NTNV	1M	SISO	2402	1	2.65	-1.26	<=12.14	Pass
			2480	1	2.65	-0.86	<=12.14	Pass
	2M	SISO	2402	1	2.65	-1.60	<=12.14	Pass
			2480	1	2.65	-2.42	<=12.14	Pass
NTLV	1M	SISO	2402	1	2.65	-1.32	<=12.14	Pass
			2480	1	2.65	-0.90	<=12.14	Pass
	2M	SISO	2402	1	2.65	-1.66	<=12.14	Pass
			2480	1	2.65	-1.24	<=12.14	Pass
NTHV	1M	SISO	2402	1	2.65	-1.59	<=12.14	Pass
			2480	1	2.65	-0.85	<=12.14	Pass
	2M	SISO	2402	1	2.65	-1.55	<=12.14	Pass
			2480	1	2.65	-1.33	<=12.14	Pass

複製禁止

3.2 Test Graph

3.2.1 Power

1M_2402MHz_Ant1_NTNV

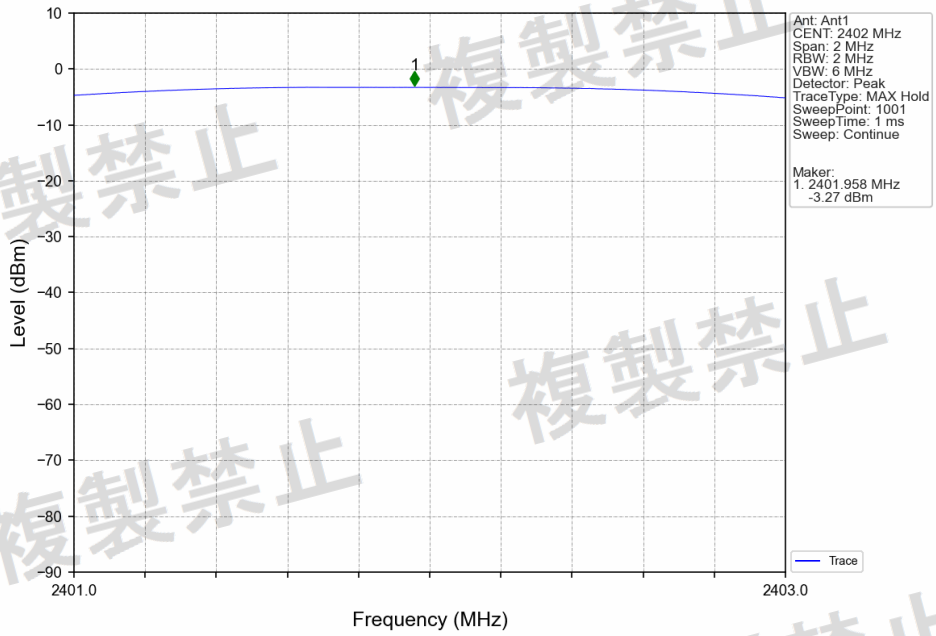

1M_2402MHz_Ant1_NTNV

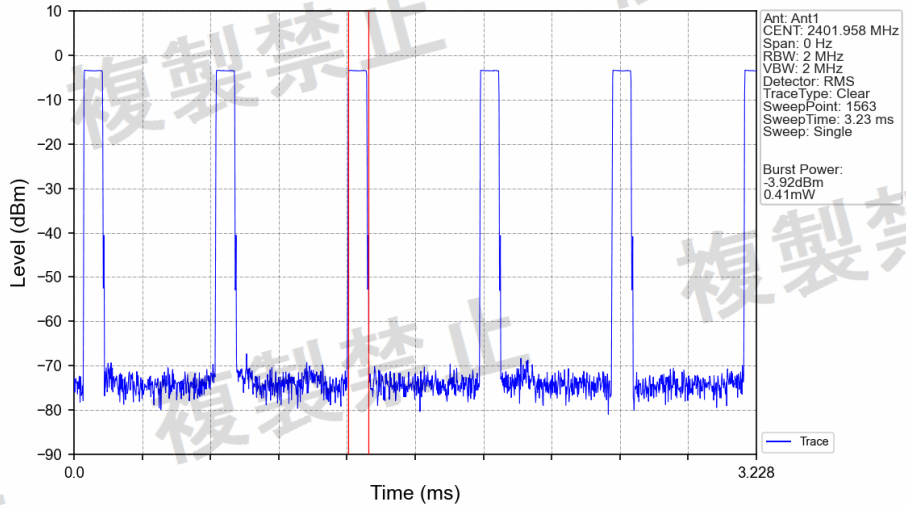

Burst No.	1	2	**3**	4	5
Length (ms)	0.097	0.097	**0.097**	0.097	0.099
Power(dBm)	-3.92	-3.92	**-3.92**	-3.92	-4.01
Power(mW)	0.405	0.405	**0.406**	0.405	0.397
Remark	/	/	**Max**	/	/

複製禁止

1M_2480MHz_Ant1_NTNV

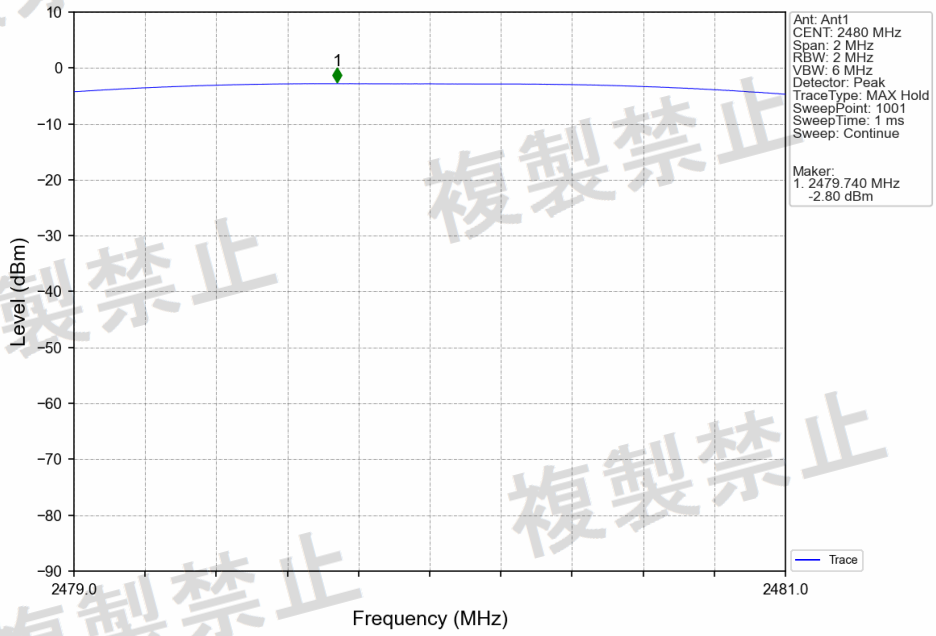

1M_2480MHz_Ant1_NTNV

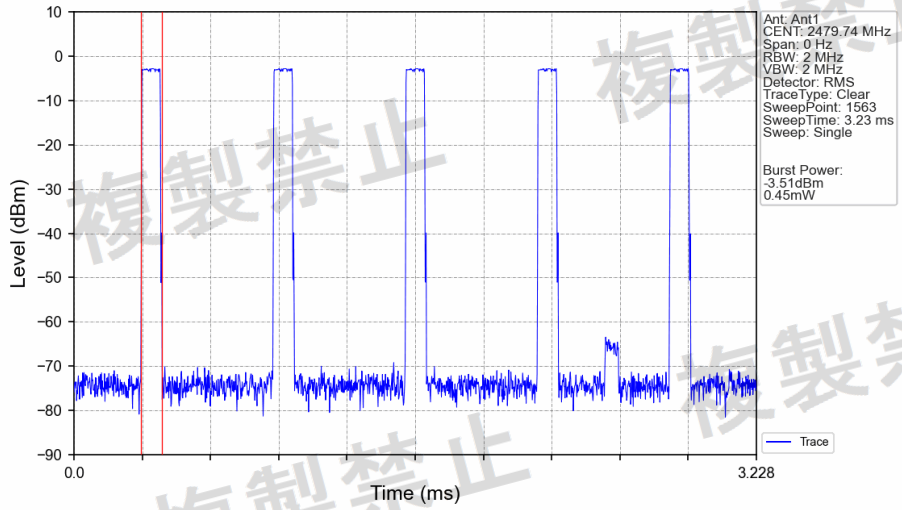

Burst No.	1	2	3	4	5
Length (ms)	**0.097**	0.097	0.097	0.097	0.099
Power(dBm)	**-3.51**	-3.51	-3.51	-3.51	-3.60
Power(mW)	**0.446**	0.446	0.446	0.446	0.436
Remark	**Max**	/	/	/	/

2M_2402MHz_Ant1_NTNV

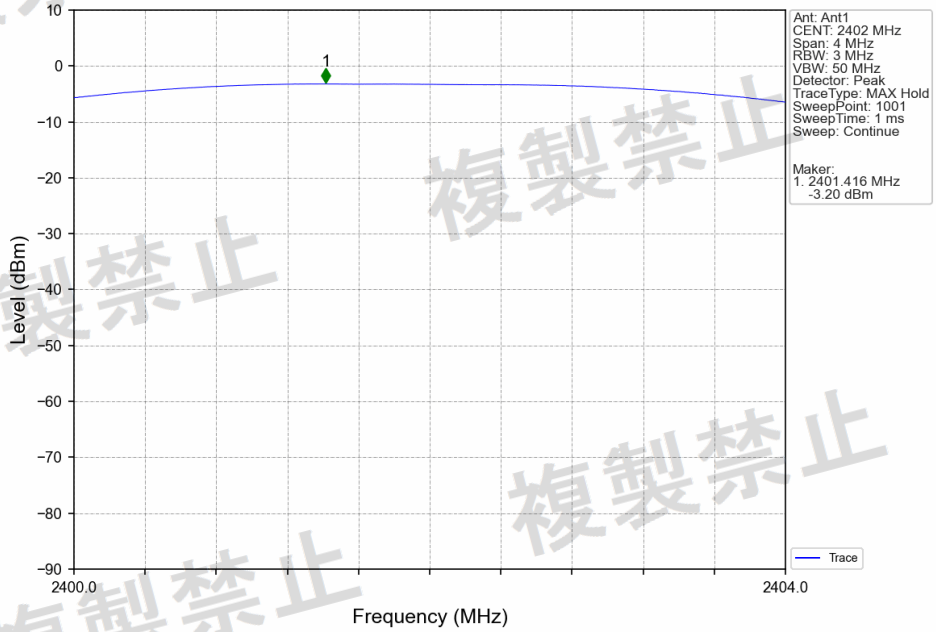

2M_2402MHz_Ant1_NTNV

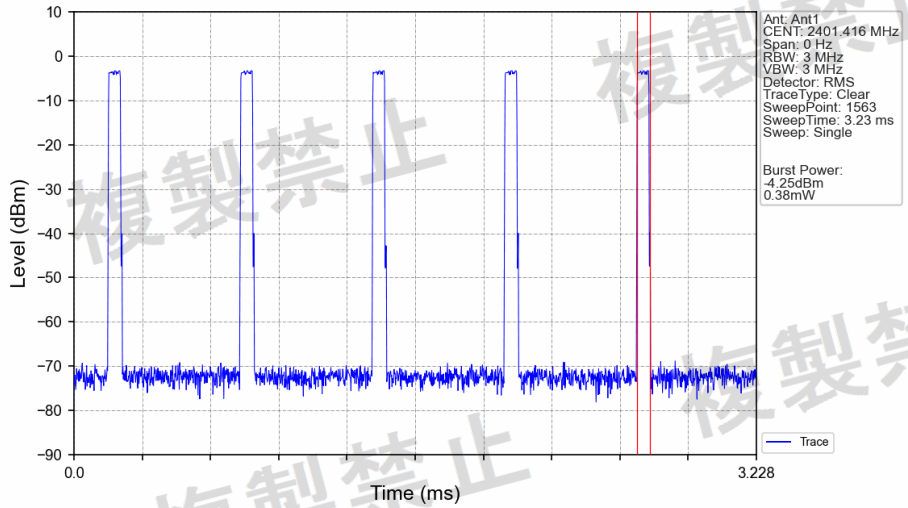

Burst No.	1	2	3	4	**5**
Length (ms)	0.066	0.066	0.066	0.066	**0.064**
Power(dBm)	-4.40	-4.39	-4.39	-4.39	**-4.25**
Power(mW)	0.363	0.364	0.364	0.364	**0.376**
Remark	/	/	/	/	**Max**

2M_2480MHz_Ant1_NTNV

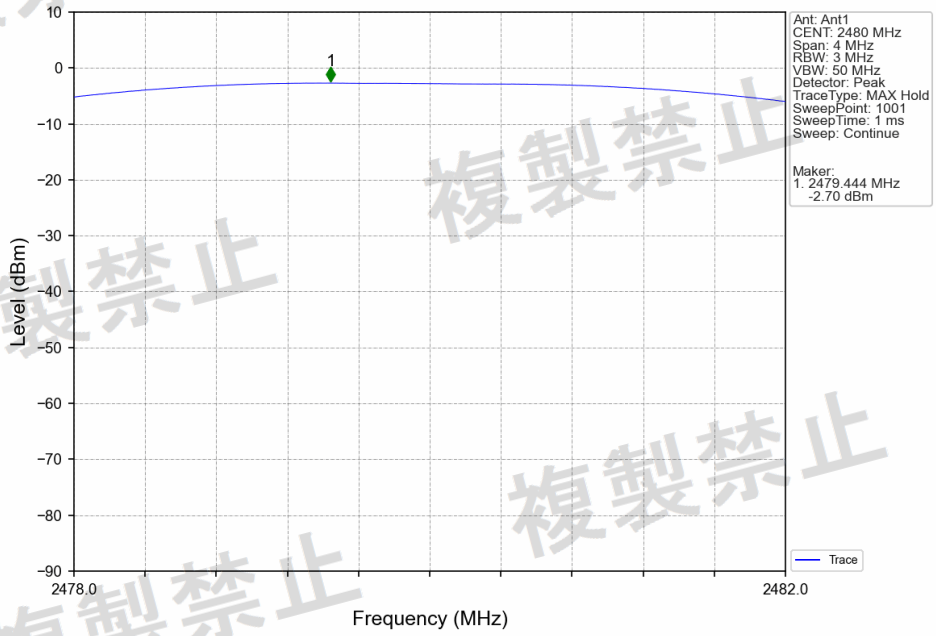

2M_2480MHz_Ant1_NTNV

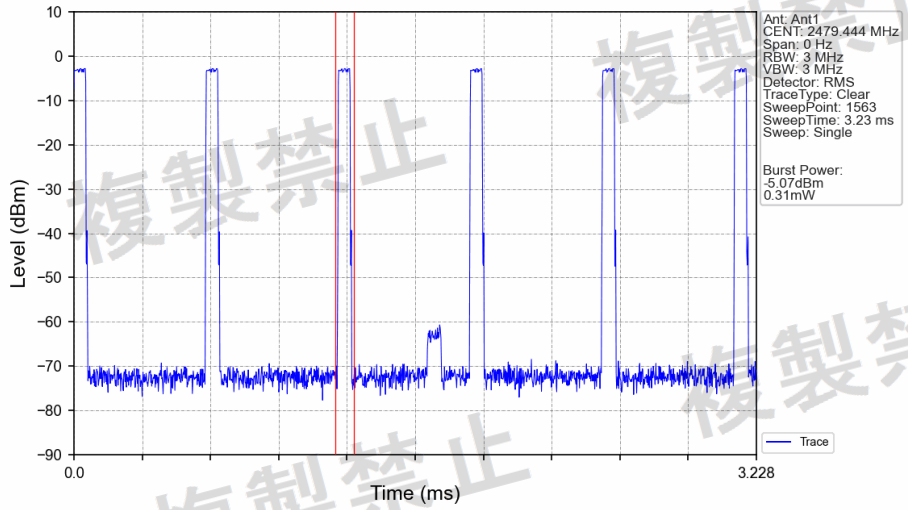

Burst No.	1	**2**	3	4
Length (ms)	0.089	**0.087**	0.089	0.089
Power(dBm)	-5.17	**-5.07**	-5.17	-5.17
Power(mW)	0.304	**0.311**	0.304	0.304
Remark	/	**Max**	/	/

1M_2402MHz_Ant1_NTLV

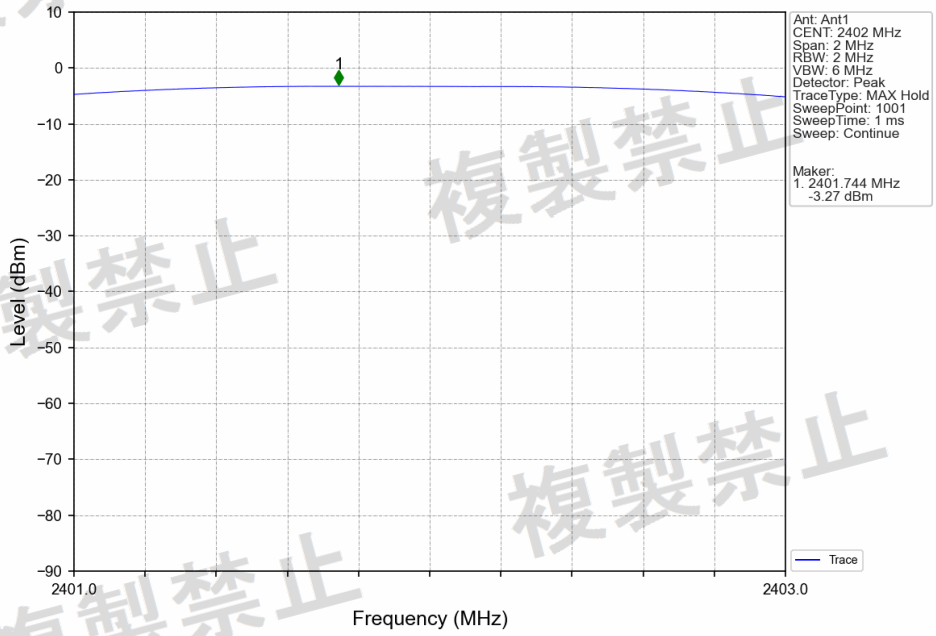

1M_2402MHz_Ant1_NTLV

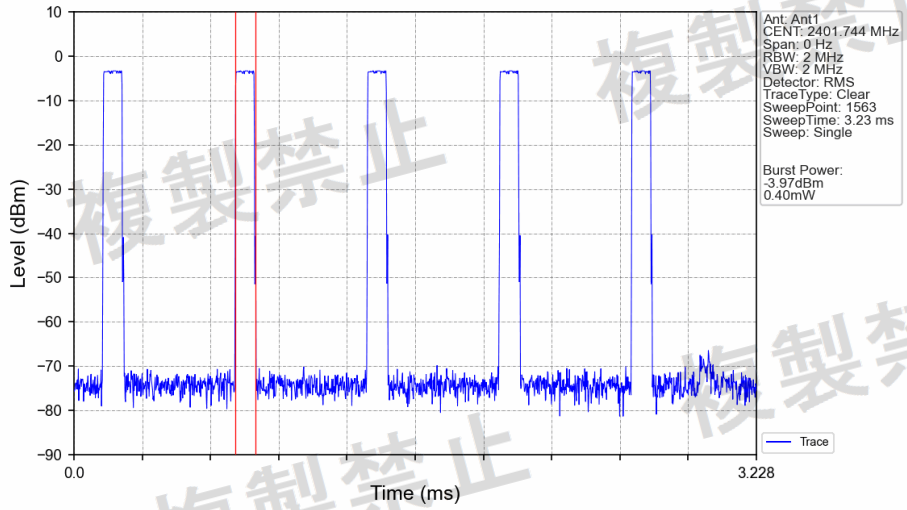

Burst No.	1	**2**	3	4	5
Length (ms)	0.099	**0.097**	0.097	0.099	0.097
Power(dBm)	-4.06	**-3.97**	-3.97	-4.06	-3.97
Power(mW)	0.393	**0.401**	0.401	0.392	0.401
Remark	/	**Max**	/	/	/

1M_2480MHz_Ant1_NTLV

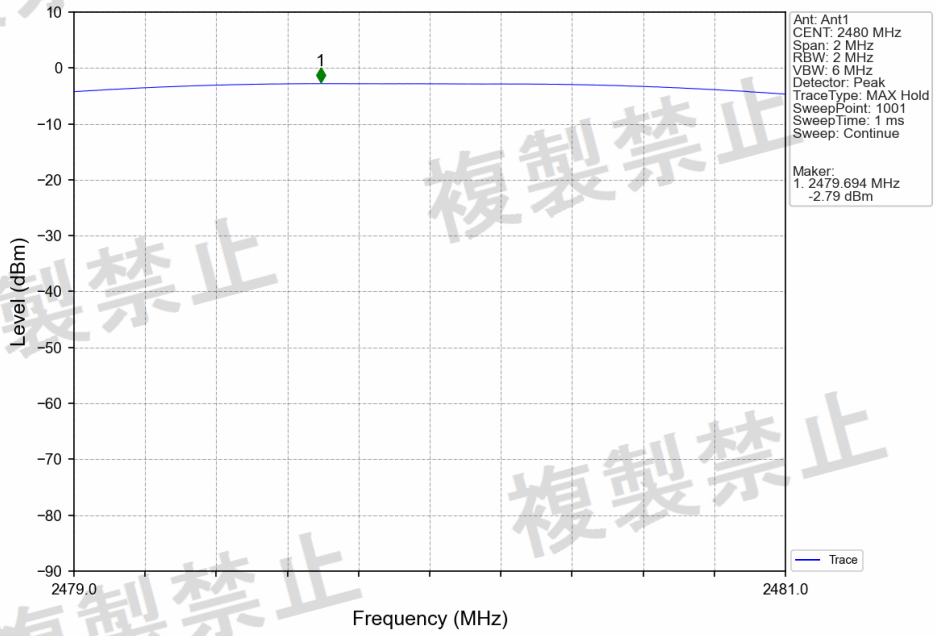

1M_2480MHz_Ant1_NTLV

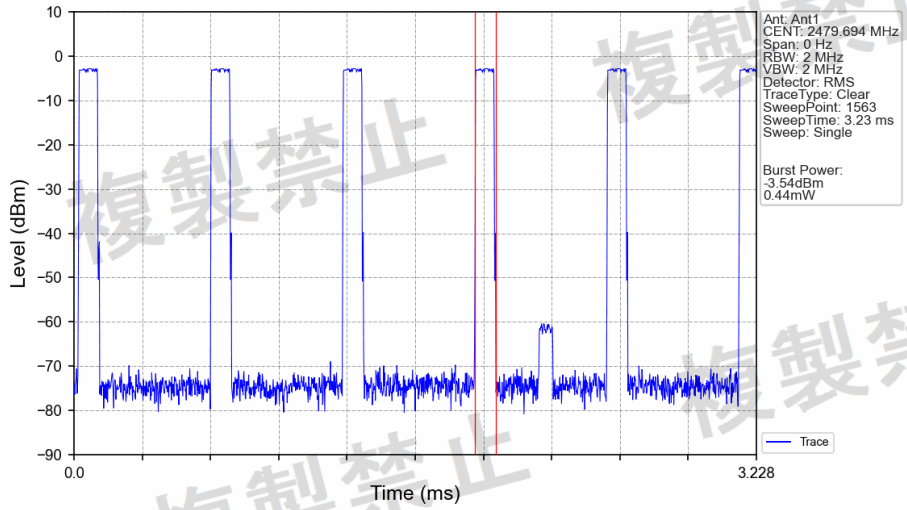

Burst No.	1	2	3	**4**	5
Length (ms)	0.099	0.097	0.097	**0.097**	0.097
Power(dBm)	-3.64	-3.55	-3.55	**-3.54**	-3.55
Power(mW)	0.433	0.442	0.442	**0.442**	0.442
Remark	/	/	/	**Max**	/

2M_2402MHz_Ant1_NTLV

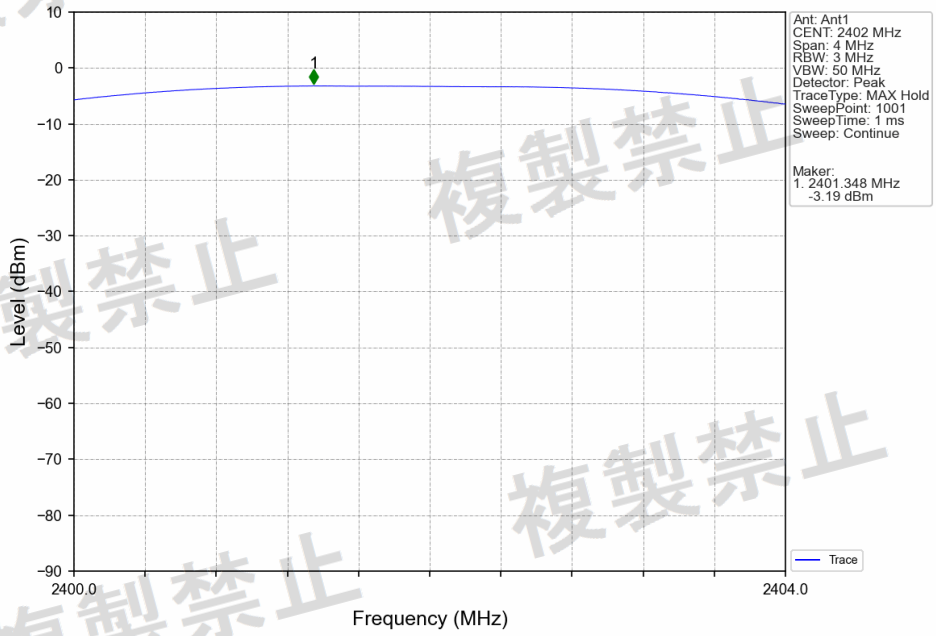

2M_2402MHz_Ant1_NTLV

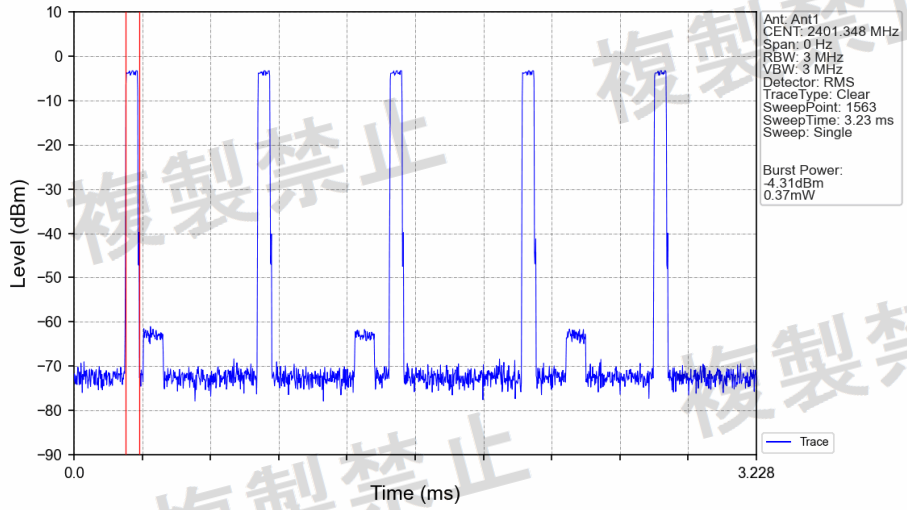

Burst No.	1	2	3	4	5
Length (ms)	**0.064**	0.066	0.066	0.066	0.066
Power(dBm)	**-4.31**	-4.44	-4.44	-4.44	-4.44
Power(mW)	**0.371**	0.359	0.359	0.360	0.360
Remark	**Max**	/	/	/	/

2M_2480MHz_Ant1_NTLV

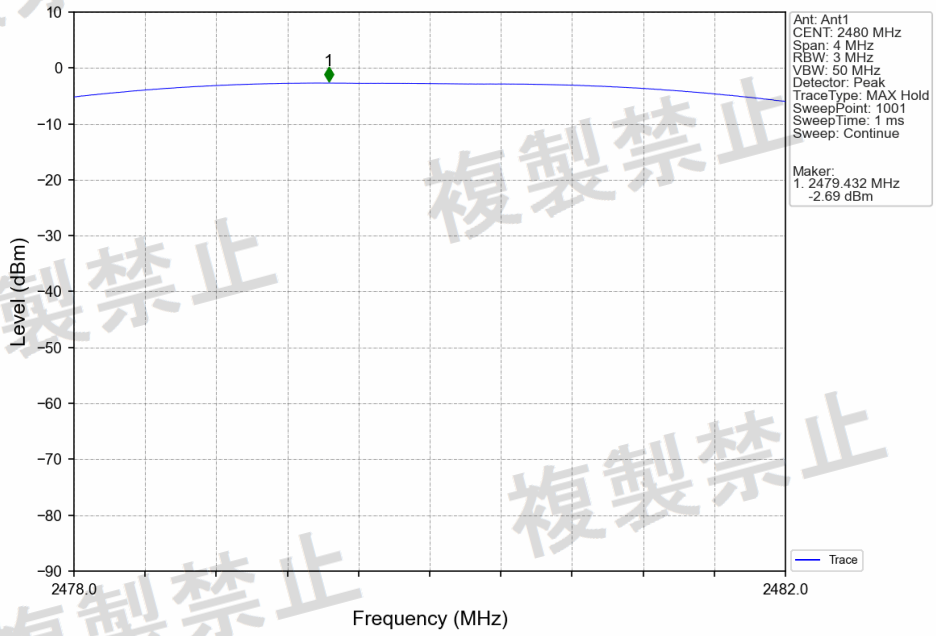

2M_2480MHz_Ant1_NTLV

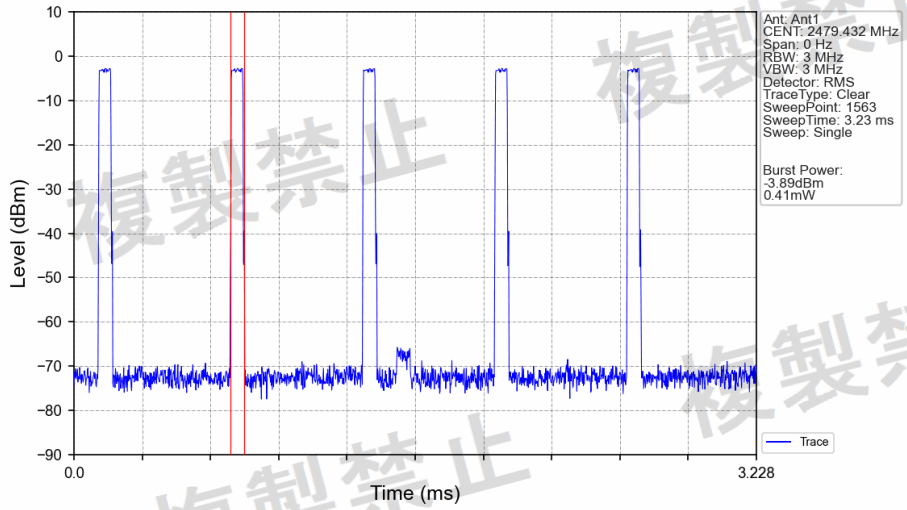

Burst No.	1	**2**	3	4	5
Length (ms)	0.066	**0.066**	0.066	0.066	0.066
Power(dBm)	-3.89	**-3.89**	-3.90	-3.89	-3.90
Power(mW)	0.408	**0.408**	0.407	0.408	0.408
Remark	/	**Max**	/	/	/

1M_2402MHz_Ant1_NTHV

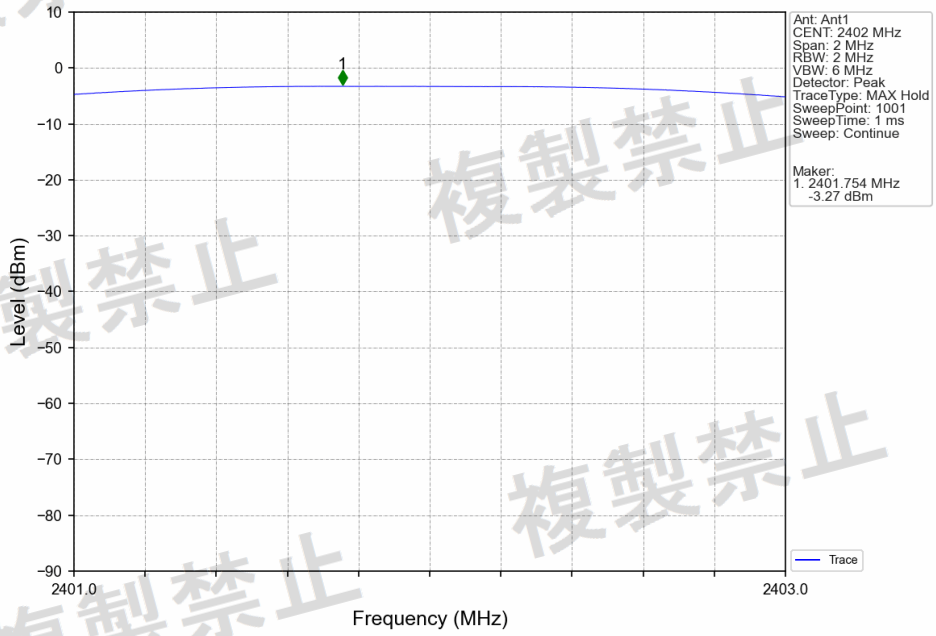

1M_2402MHz_Ant1_NTHV

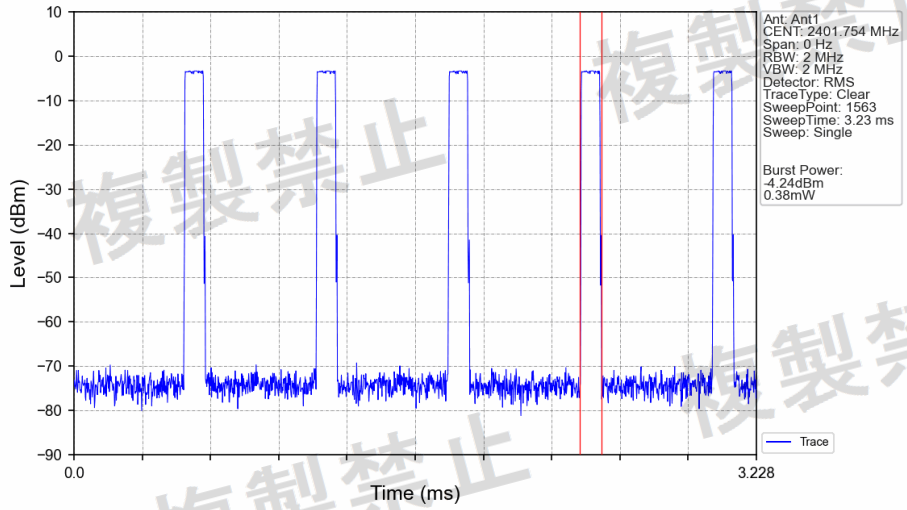

Burst No.	1	2	3	**4**	5
Length (ms)	0.105	0.103	0.105	**0.103**	0.105
Power(dBm)	-4.33	-4.25	-4.34	**-4.24**	-4.33
Power(mW)	0.369	0.376	0.368	**0.377**	0.369
Remark	/	/	/	**Max**	/

1M_2480MHz_Ant1_NTHV

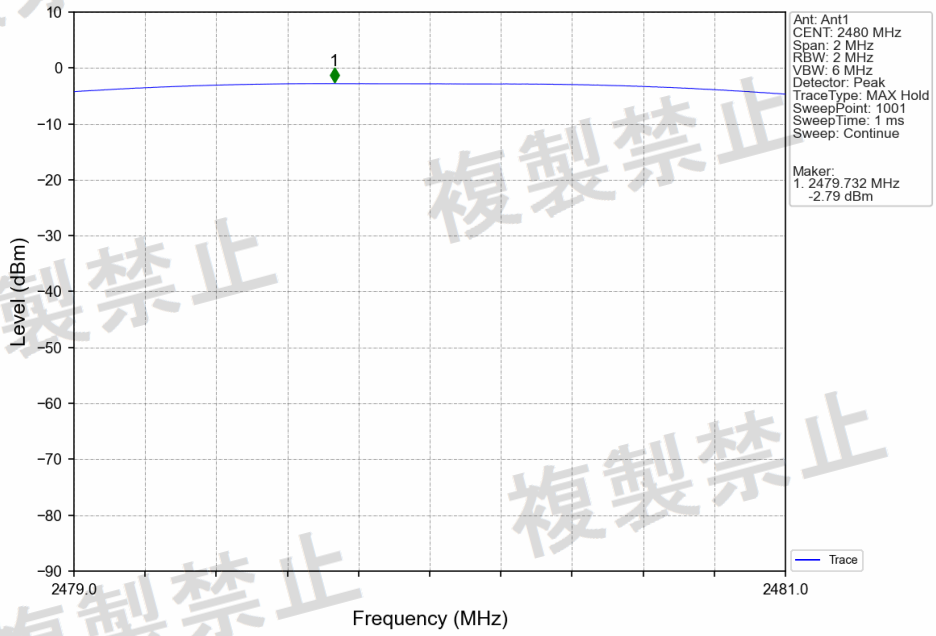

1M_2480MHz_Ant1_NTHV

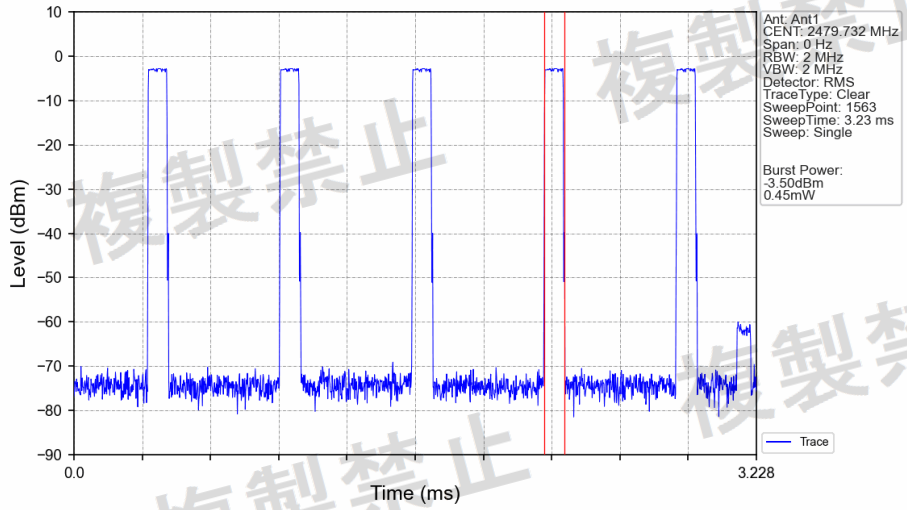

Burst No.	1	2	3	**4**	5
Length (ms)	0.097	0.099	0.097	**0.097**	0.099
Power(dBm)	-3.50	-3.59	-3.50	**-3.50**	-3.60
Power(mW)	0.447	0.438	0.447	**0.447**	0.437
Remark	/	/	/	**Max**	/

2M_2402MHz_Ant1_NTHV

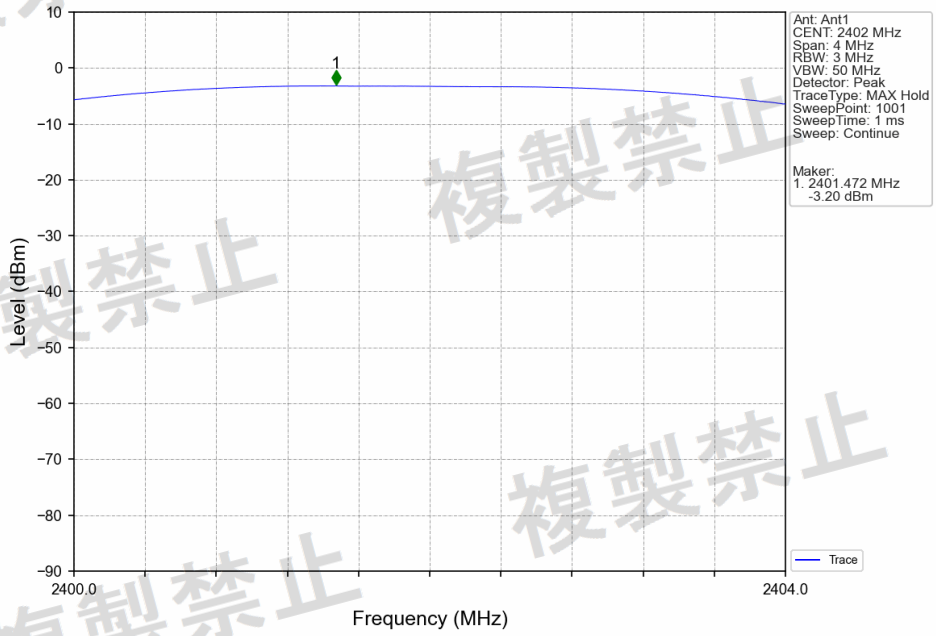

2M_2402MHz_Ant1_NTHV

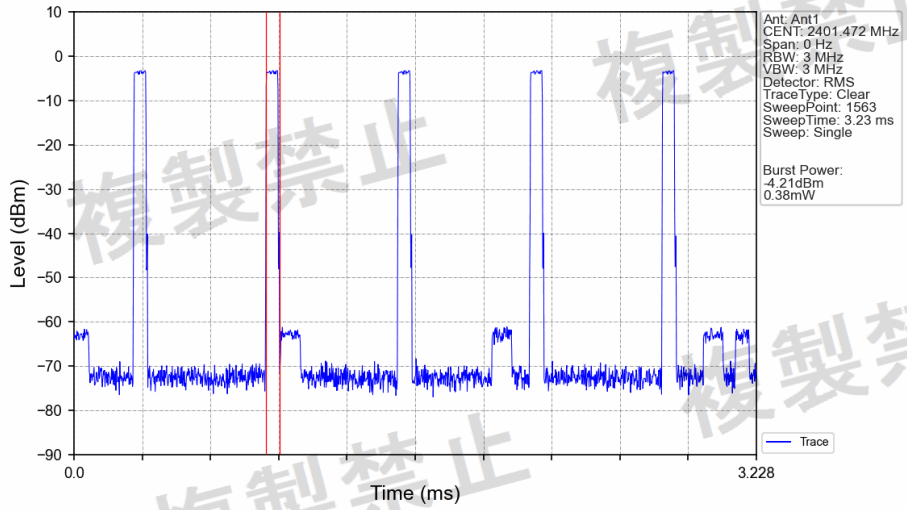

Burst No.	1	**2**	3	4	5
Length (ms)	0.066	**0.064**	0.066	0.066	0.066
Power(dBm)	-4.35	**-4.21**	-4.34	-4.34	-4.35
Power(mW)	0.367	**0.380**	0.368	0.368	0.367
Remark	/	**Max**	/	/	/

2M_2480MHz_Ant1_NTHV

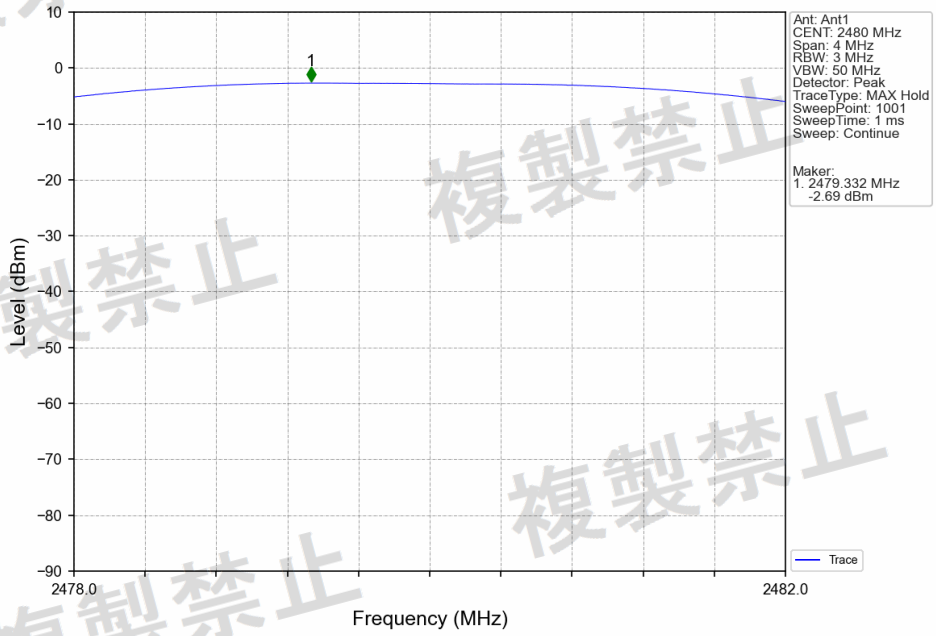

2M_2480MHz_Ant1_NTHV

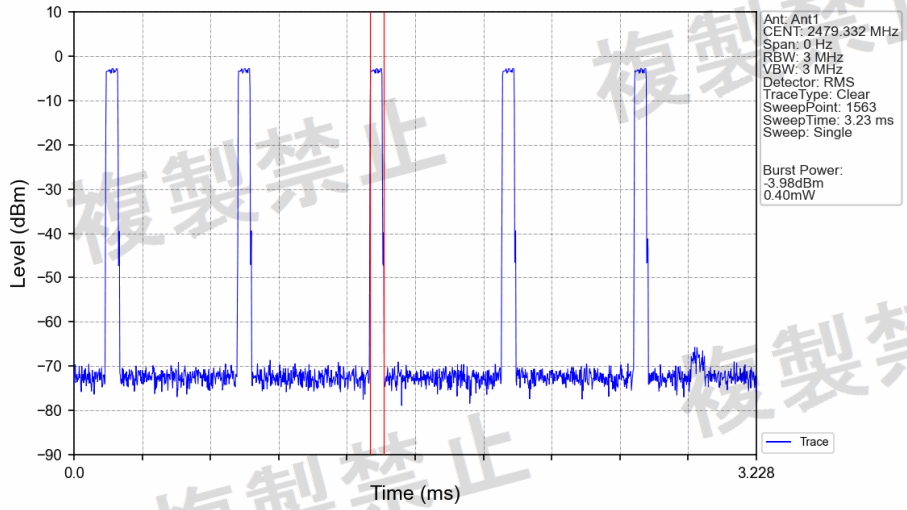

Burst No.	1	2	**3**	4	5
Length (ms)	0.066	0.066	**0.066**	0.066	0.066
Power(dBm)	-3.98	-3.98	**-3.98**	-3.98	-3.98
Power(mW)	0.400	0.400	**0.400**	0.400	0.400
Remark	/	/	**Max**	/	/

4. Spurious Emission Intensity

4.1 Test Result

4.1.1 TxSe_NTNV

NTNV												
Mode	TX Type	Freq. (MHz)	ANT	Freq. Range		Marker					Limit (uW /MHz)	Verdict
				Start (MHz)	Stop (MHz)	Freq. (MHz)	PK Power (dBm /MHz)	PK Power (uW /MHz)	AV Power (dBm /MHz)	AV Power (uW /MHz)		
1M	SISO	2402	1	30	2387	1755.5	-40.60	0.087	/	/	2.5	Pass
				2387	2400	2399.948	-36.88	0.205	/	/	25	Pass
				2483.5	2496.5	2495.902	-60.68	0.001	/	/	25	Pass
				2496.5	12500	9602	-50.89	0.008	/	/	2.5	Pass
		2480	1	30	2387	1747	-43.26	0.047	/	/	2.5	Pass
				2387	2400	2399.779	-60.01	0.001	/	/	25	Pass
				2483.5	2496.5	2495.993	-45.56	0.028	/	/	25	Pass
				2496.5	12500	2501.5	-46.87	0.021	/	/	2.5	Pass
2M	SISO	2402	1	30	2387	1746.5	-48.13	0.015	/	/	2.5	Pass
				2387	2400	2399.987	-26.00	2.512	/	/	25	Pass
				2483.5	2496.5	2495.993	-60.59	0.001	/	/	25	Pass
				2496.5	12500	9602	-50.74	0.008	/	/	2.5	Pass
		2480	1	30	2387	1764	-52.34	0.006	/	/	2.5	Pass
				2387	2400	2399.857	-60.50	0.001	/	/	25	Pass
				2483.5	2496.5	2485.489	-46.21	0.024	/	/	25	Pass
				2496.5	12500	2497.5	-49.49	0.011	/	/	2.5	Pass

4.1.2 TxSe_NTLV

NTLV												
Mode	TX Type	Freq. (MHz)	ANT	Freq. Range		Marker					Limit (uW /MHz)	Verdict
				Start (MHz)	Stop (MHz)	Freq. (MHz)	PK Power (dBm /MHz)	PK Power (uW /MHz)	AV Power (dBm /MHz)	AV Power (uW /MHz)		
1M	SISO	2402	1	30	2387	1747	-39.09	0.123	/	/	2.5	Pass
				2387	2400	2399.974	-37.07	0.196	/	/	25	Pass
				2483.5	2496.5	2495.85	-60.45	0.001	/	/	25	Pass
				2496.5	12500	9602	-51.02	0.008	/	/	2.5	Pass
		2480	1	30	2387	1764.5	-41.94	0.064	/	/	2.5	Pass
				2387	2400	2399.87	-60.28	0.001	/	/	25	Pass
				2483.5	2496.5	2495.759	-45.75	0.027	/	/	25	Pass
				2496.5	12500	2501	-48.93	0.013	/	/	2.5	Pass
2M	SISO	2402	1	30	2387	1756	-39.72	0.107	/	/	2.5	Pass
				2387	2400	2399.987	-26.01	2.506	/	/	25	Pass
				2483.5	2496.5	2495.993	-60.53	0.001	/	/	25	Pass
				2496.5	12500	9602	-50.40	0.009	/	/	2.5	Pass
		2480	1	30	2387	1764.5	-48.94	0.013	/	/	2.5	Pass
				2387	2400	2399.662	-59.49	0.001	/	/	25	Pass
				2483.5	2496.5	2495.85	-46.25	0.024	/	/	25	Pass
				2496.5	12500	2497	-48.78	0.013	/	/	2.5	Pass

複製禁止

4.1.3 TxSe_NTHV

NTHV												
Mode	TX Type	Freq. (MHz)	ANT	Freq. Range		Marker					Limit (uW /MHz)	Verdict
				Start (MHz)	Stop (MHz)	Freq. (MHz)	PK Power (dBm /MHz)	PK Power (uW /MHz)	AV Power (dBm /MHz)	AV Power (uW /MHz)		
1M	SISO	2402	1	30	2387	1756.5	-32.15	0.610	/	/	2.5	Pass
				2387	2400	2399.987	-37.17	0.192	/	/	25	Pass
				2483.5	2496.5	2495.876	-60.83	0.001	/	/	25	Pass
				2496.5	12500	9602	-50.93	0.008	/	/	2.5	Pass
		2480	1	30	2387	1764	-42.26	0.059	/	/	2.5	Pass
				2387	2400	2399.753	-60.17	0.001	/	/	25	Pass
				2483.5	2496.5	2495.941	-45.70	0.027	/	/	25	Pass
				2496.5	12500	2501	-47.74	0.017	/	/	2.5	Pass
2M	SISO	2402	1	30	2387	1756	-48.32	0.015	/	/	2.5	Pass
				2387	2400	2399.987	-25.96	2.535	/	/	25	Pass
				2483.5	2496.5	2496.071	-60.40	0.001	/	/	25	Pass
				2496.5	12500	9602	-51.26	0.007	/	/	2.5	Pass
		2480	1	30	2387	1757.5	-44.45	0.036	/	/	2.5	Pass
				2387	2400	2399.701	-60.28	0.001	/	/	25	Pass
				2483.5	2496.5	2485.333	-46.19	0.024	/	/	25	Pass
				2496.5	12500	2499.5	-49.47	0.011	/	/	2.5	Pass

複製禁止

4.2 Test Graph

4.2.1 TxSe_NTNV

1M_2402MHz_Ant1_NTNV

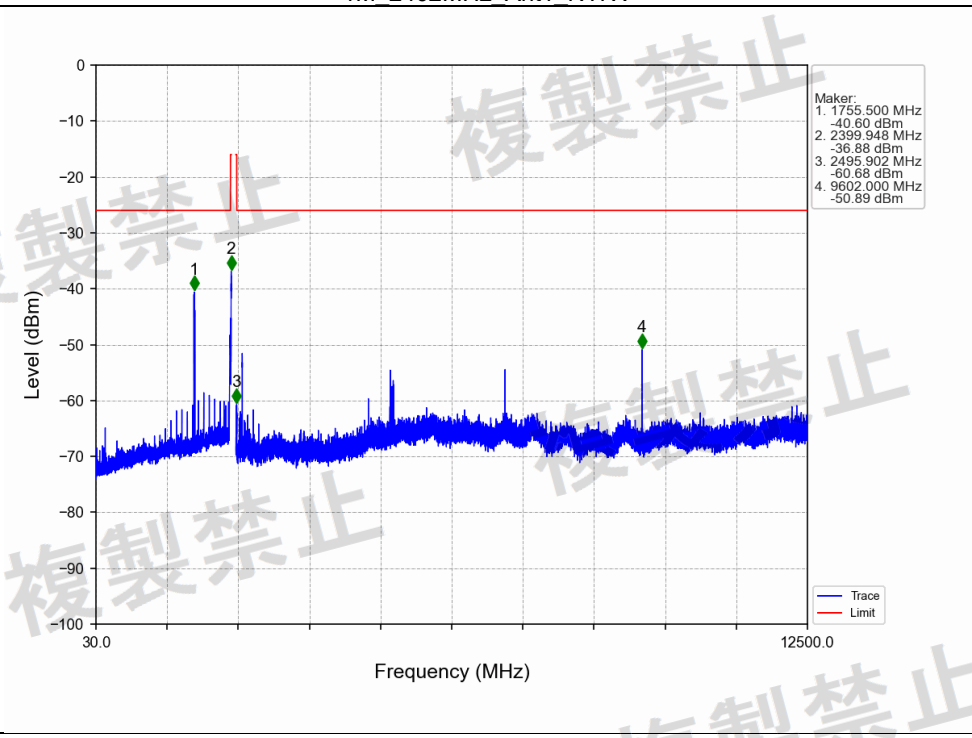

1M_2402MHz_Ant1_NTNV

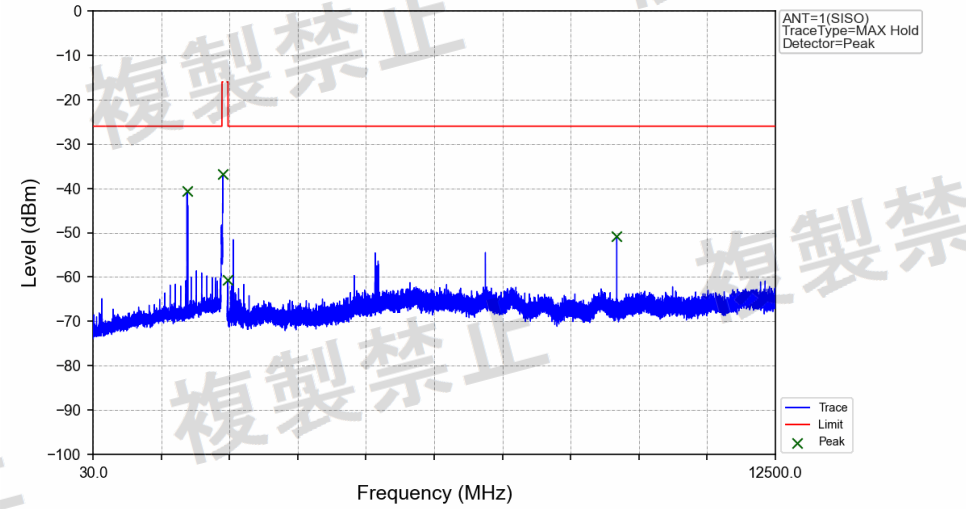

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	2387	1	1	1755.500	-40.60	/	-26	Pass
2387	2400	1	1	2399.948	-36.88	/	-16	Pass
2483.5	2496.5	1	1	2495.902	-60.68	/	-16	Pass
2496.5	12500	1	1	9602.000	-50.89	/	-26	Pass

1M_2480MHz_Ant1_NTNV

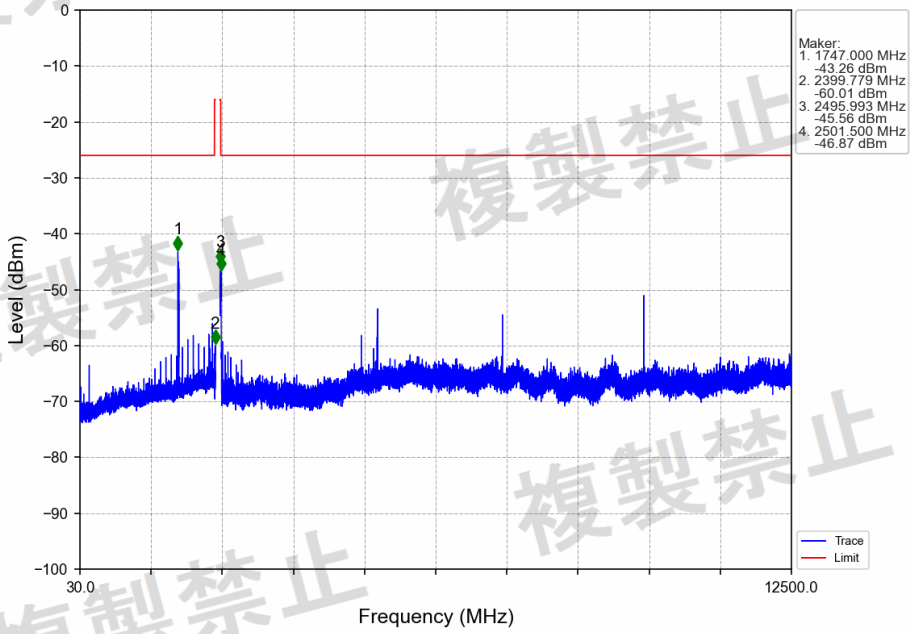

1M_2480MHz_Ant1_NTNV

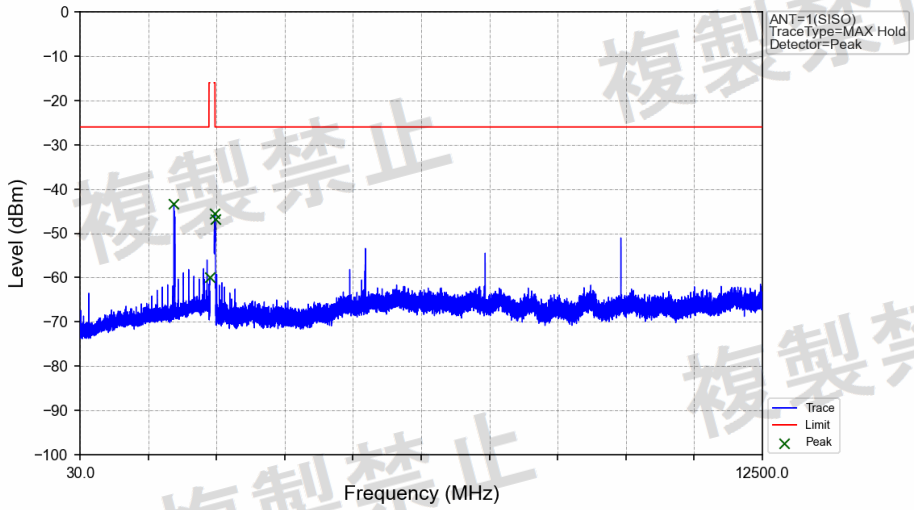

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	2387	1	1	1747.000	-43.26	/	-26	Pass
2387	2400	1	1	2399.779	-60.01	/	-16	Pass
2483.5	2496.5	1	1	2495.993	-45.56	/	-16	Pass
2496.5	12500	1	1	2501.500	-46.87	/	-26	Pass

2M_2402MHz_Ant1_NTNV

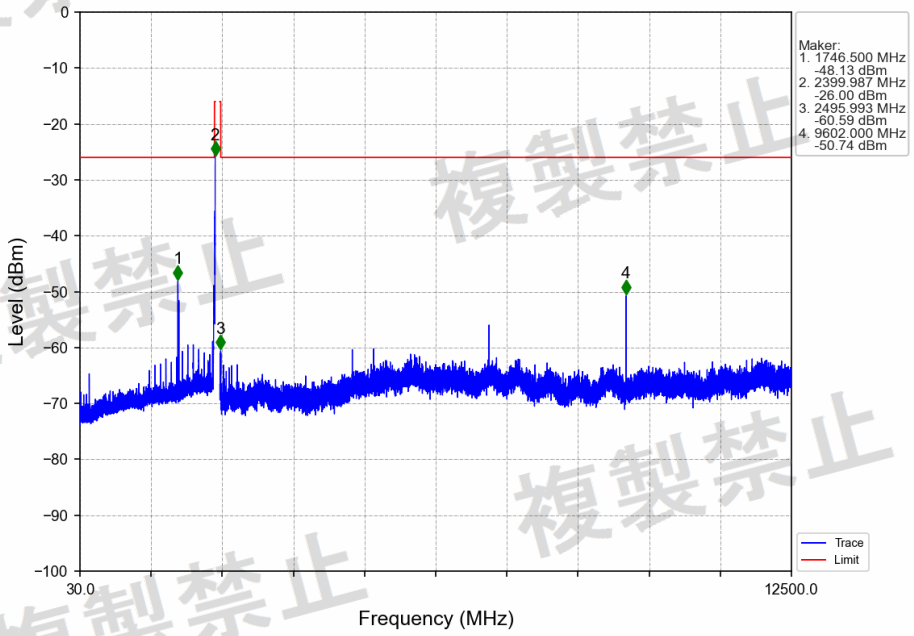

2M_2402MHz_Ant1_NTNV

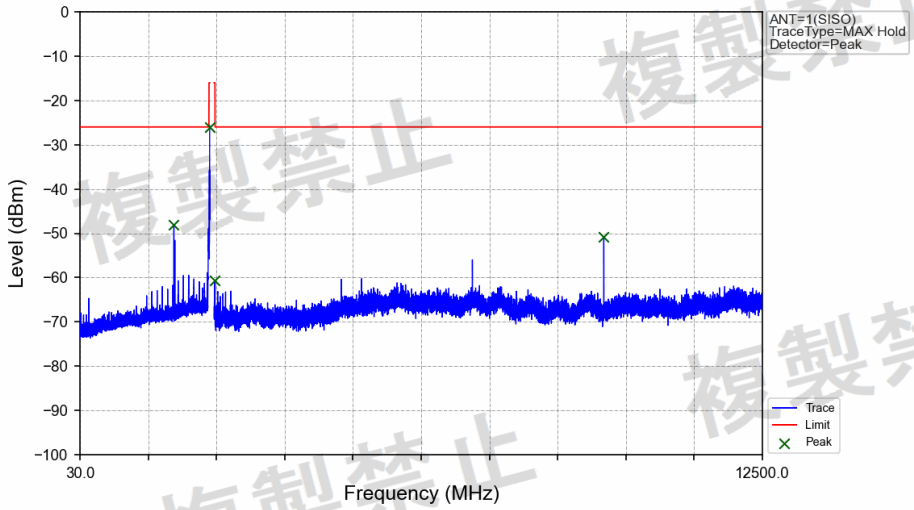

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	2387	1	1	1746.500	-48.13	/	-26	Pass
2387	2400	1	1	2399.987	-26.00	/	-16	Pass
2483.5	2496.5	1	1	2495.993	-60.59	/	-16	Pass
2496.5	12500	1	1	9602.000	-50.74	/	-26	Pass

2M_2480MHz_Ant1_NTNV

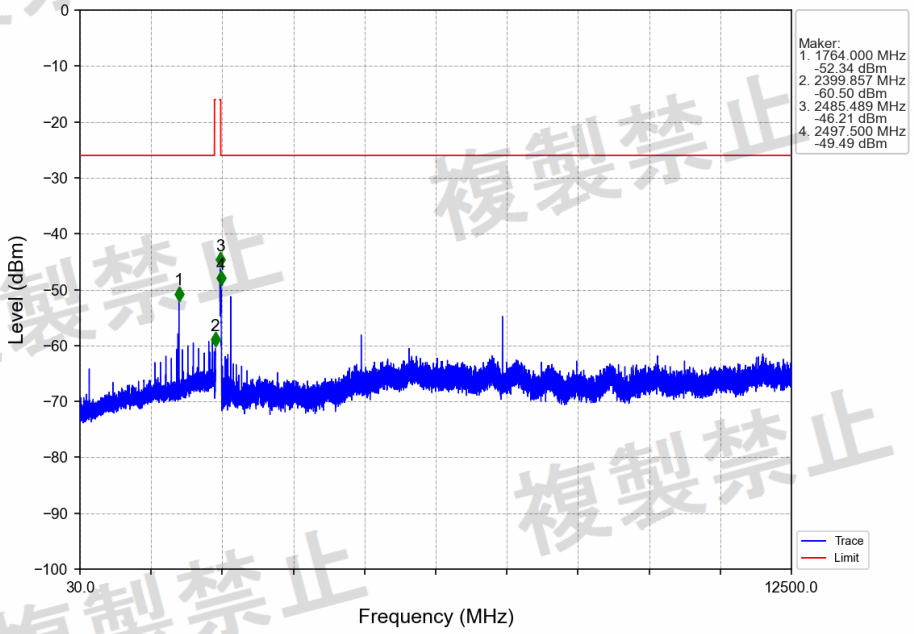

2M_2480MHz_Ant1_NTNV

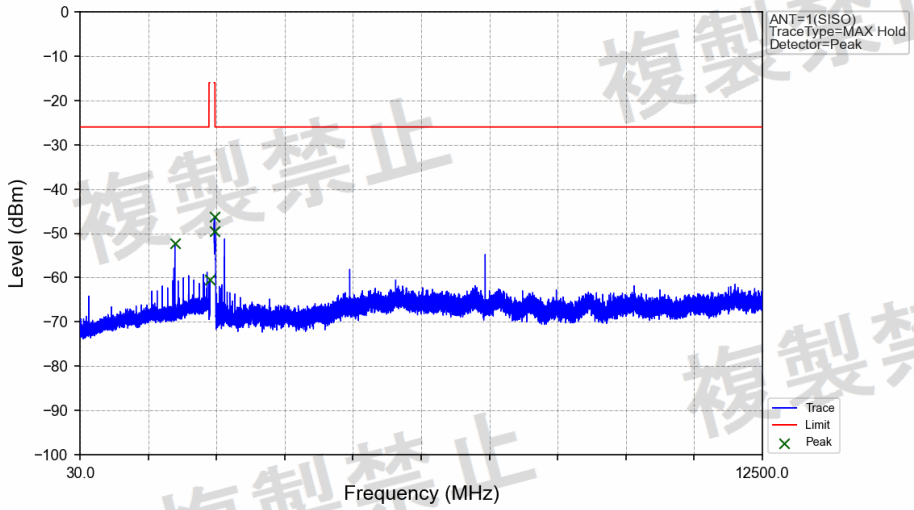

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	2387	1	1	1764.000	-52.34	/	-26	Pass
2387	2400	1	1	2399.857	-60.50	/	-16	Pass
2483.5	2496.5	1	1	2485.489	-46.21	/	-16	Pass
2496.5	12500	1	1	2497.500	-49.49	/	-26	Pass

4.2.2 TxSe_NTLV

1M_2402MHz_Ant1_NTLV

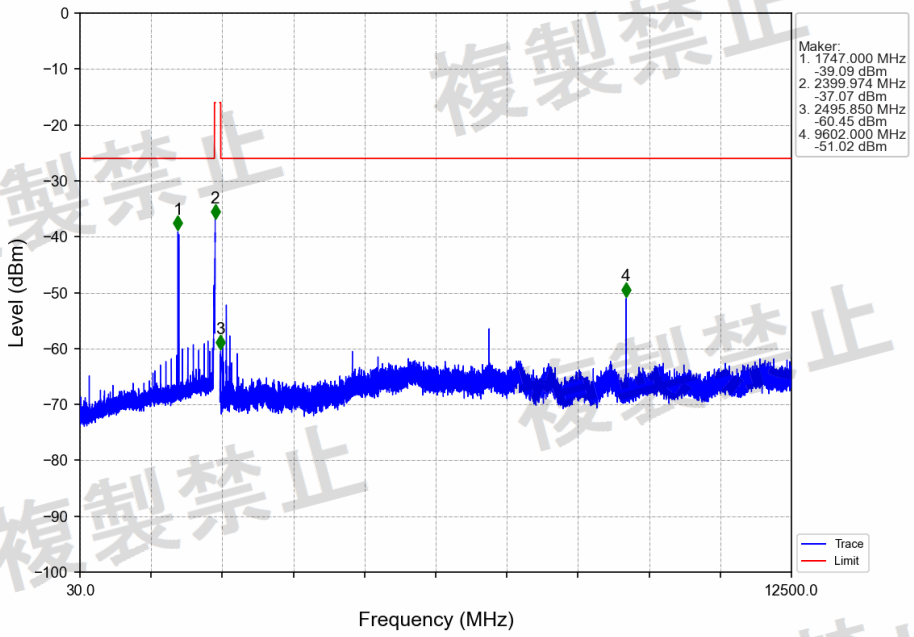

1M_2402MHz_Ant1_NTLV

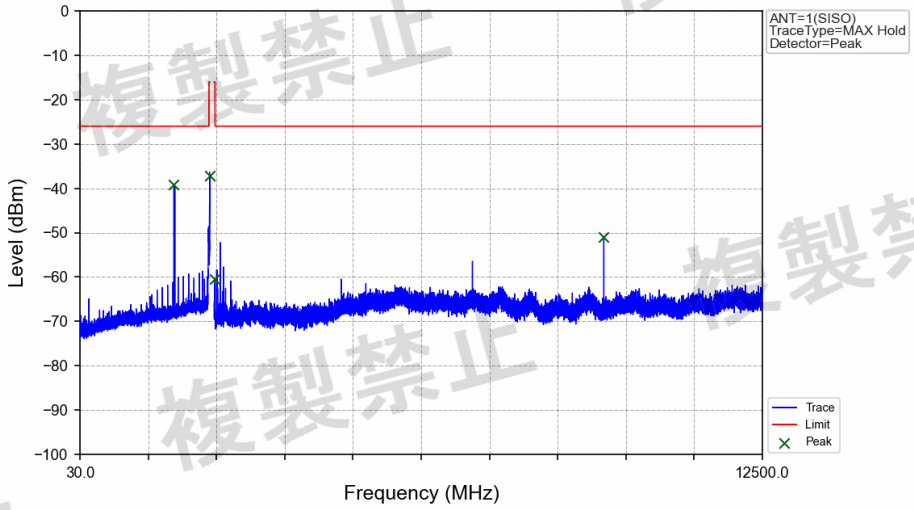

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	2387	1	1	1747.000	-39.09	/	-26	Pass
2387	2400	1	1	2399.974	-37.07	/	-16	Pass
2483.5	2496.5	1	1	2495.850	-60.45	/	-16	Pass
2496.5	12500	1	1	9602.000	-51.02	/	-26	Pass

1M_2480MHz_Ant1_NTLV

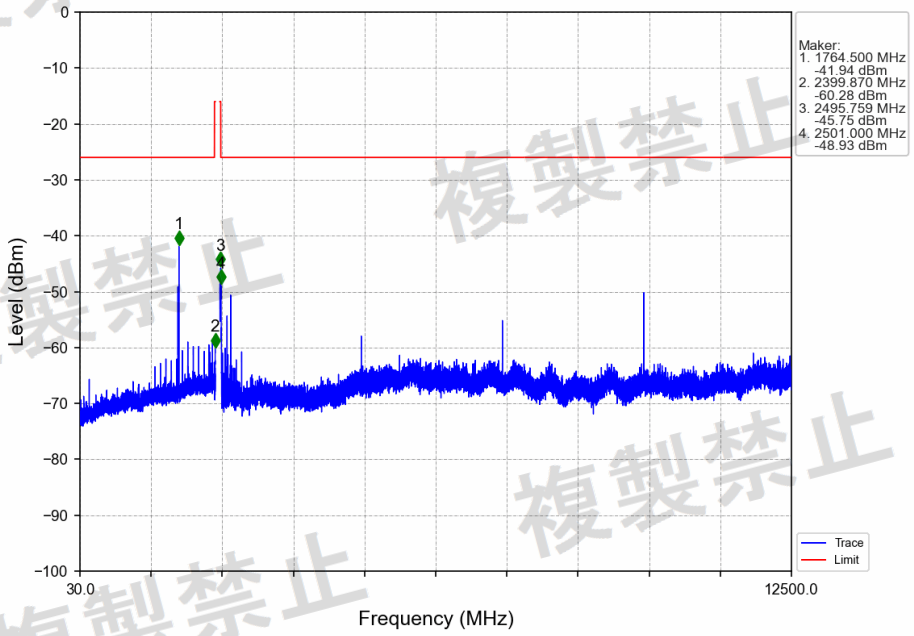

1M_2480MHz_Ant1_NTLV

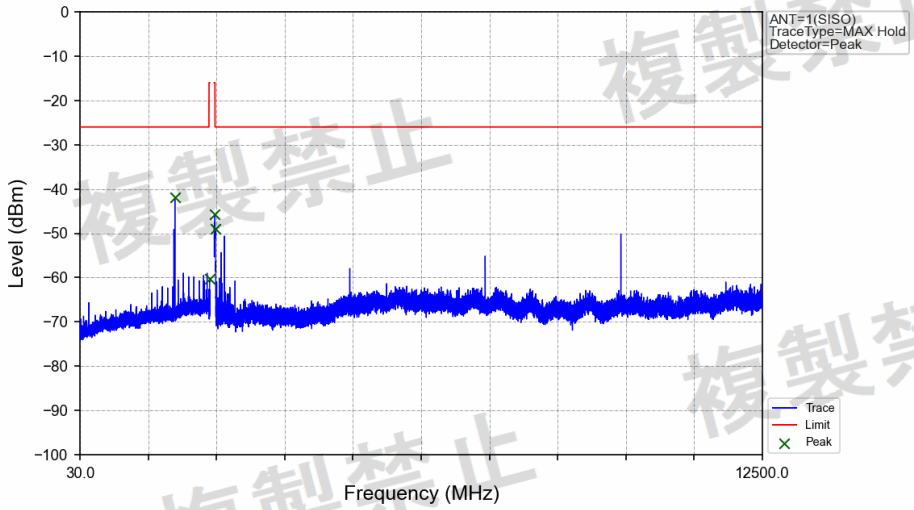

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	2387	1	1	1764.500	-41.94	/	-26	Pass
2387	2400	1	1	2399.870	-60.28	/	-16	Pass
2483.5	2496.5	1	1	2495.759	-45.75	/	-16	Pass
2496.5	12500	1	1	2501.000	-48.93	/	-26	Pass

2M_2402MHz_Ant1_NTLV

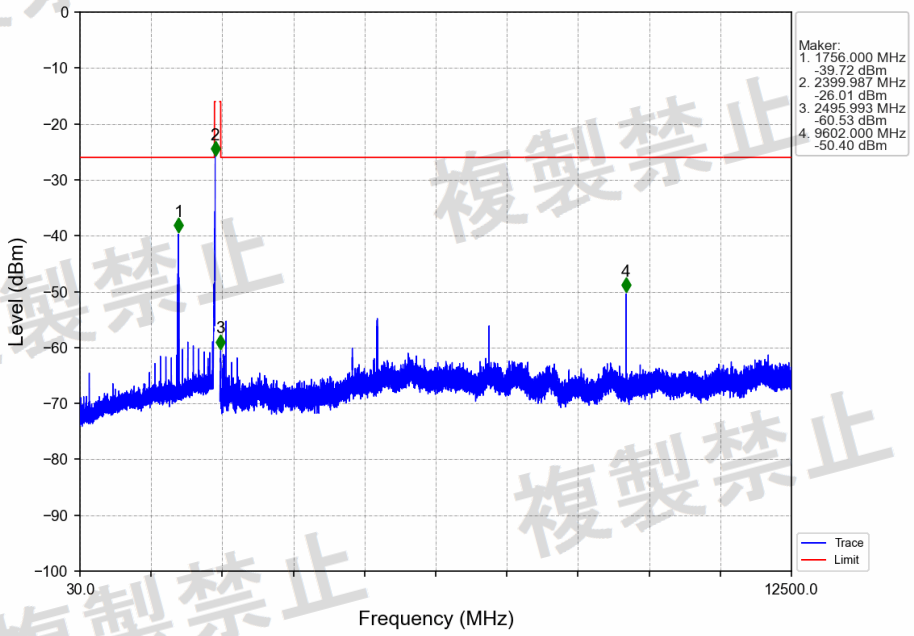

2M_2402MHz_Ant1_NTLV

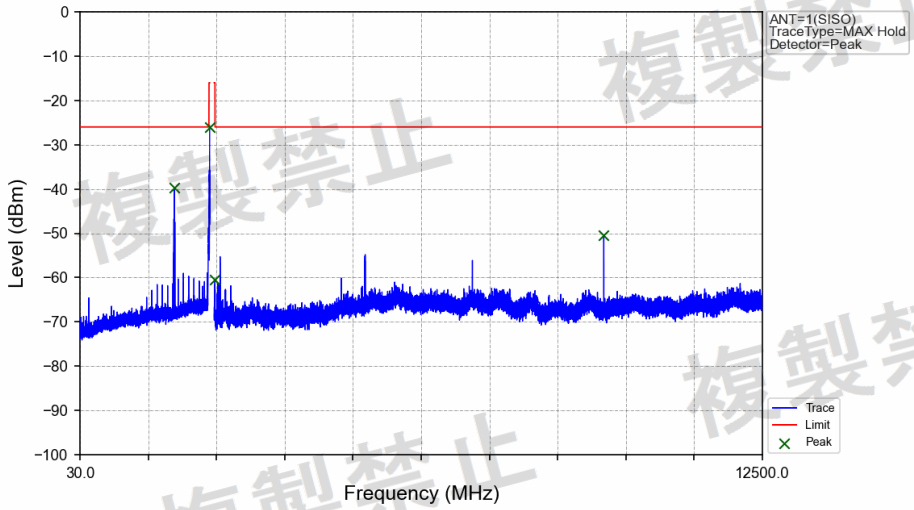

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	2387	1	1	1756.000	-39.72	/	-26	Pass
2387	2400	1	1	2399.987	-26.01	/	-16	Pass
2483.5	2496.5	1	1	2495.993	-60.53	/	-16	Pass
2496.5	12500	1	1	9602.000	-50.40	/	-26	Pass

2M_2480MHz_Ant1_NTLV

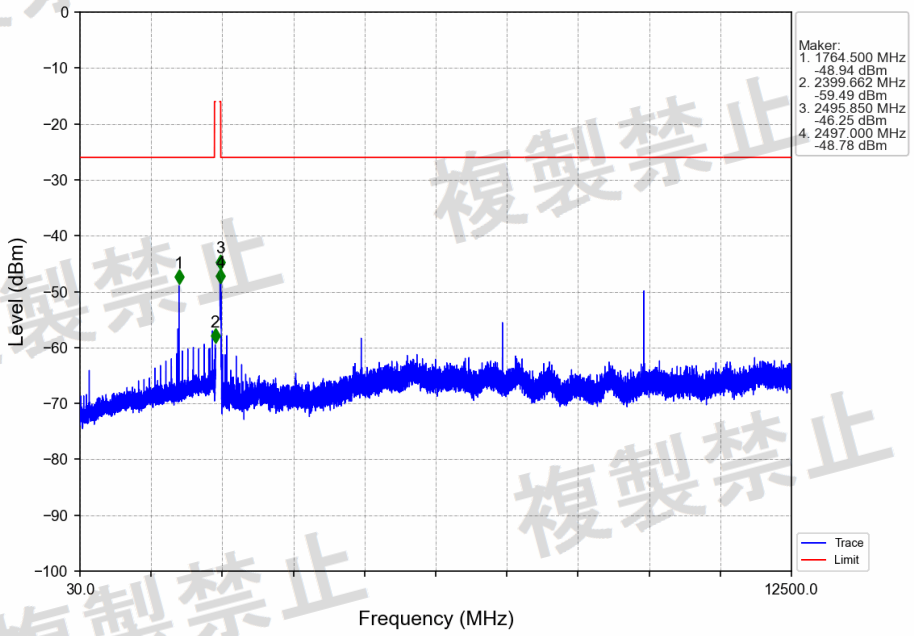

2M_2480MHz_Ant1_NTLV

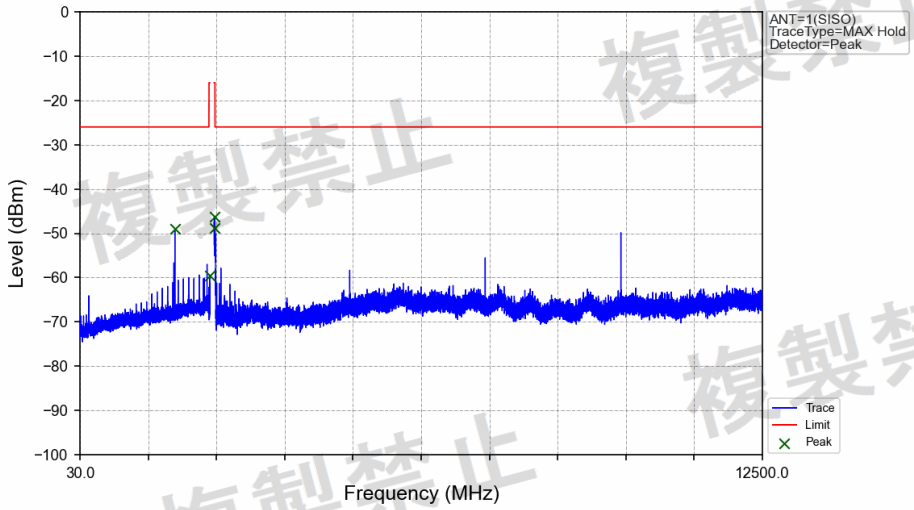

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	2387	1	1	1764.500	-48.94	/	-26	Pass
2387	2400	1	1	2399.662	-59.49	/	-16	Pass
2483.5	2496.5	1	1	2495.850	-46.25	/	-16	Pass
2496.5	12500	1	1	2497.000	-48.78	/	-26	Pass

4.2.3 TxSe_NTHV

1M_2402MHz_Ant1_NTHV

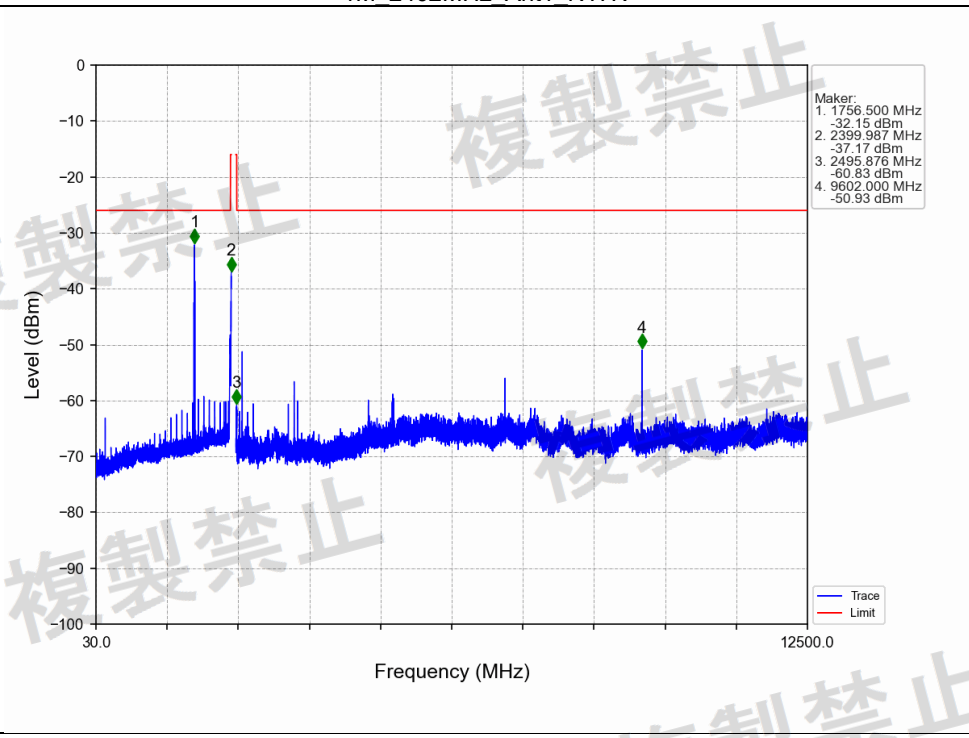

1M_2402MHz_Ant1_NTHV

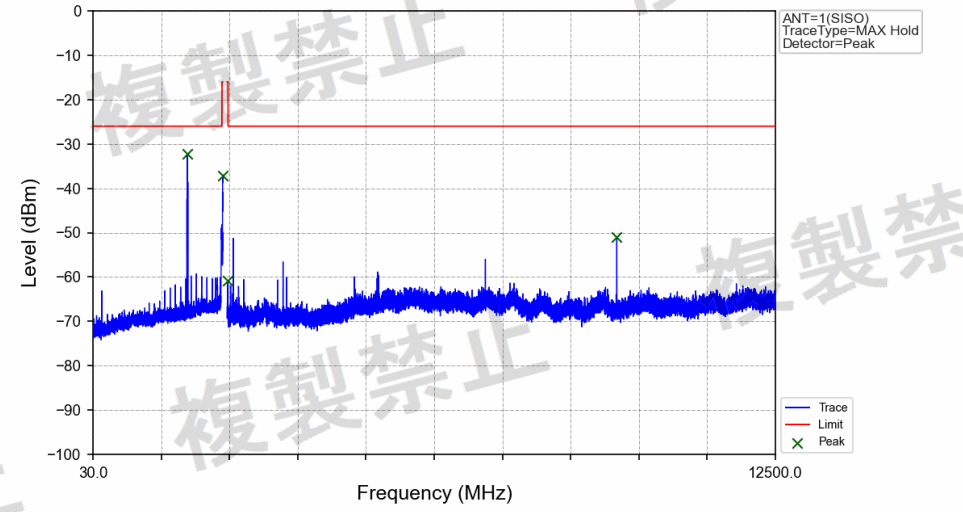

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	2387	1	1	1756.500	-32.15	/	-26	Pass
2387	2400	1	1	2399.987	-37.17	/	-16	Pass
2483.5	2496.5	1	1	2495.876	-60.83	/	-16	Pass
2496.5	12500	1	1	9602.000	-50.93	/	-26	Pass

1M_2480MHz_Ant1_NTHV

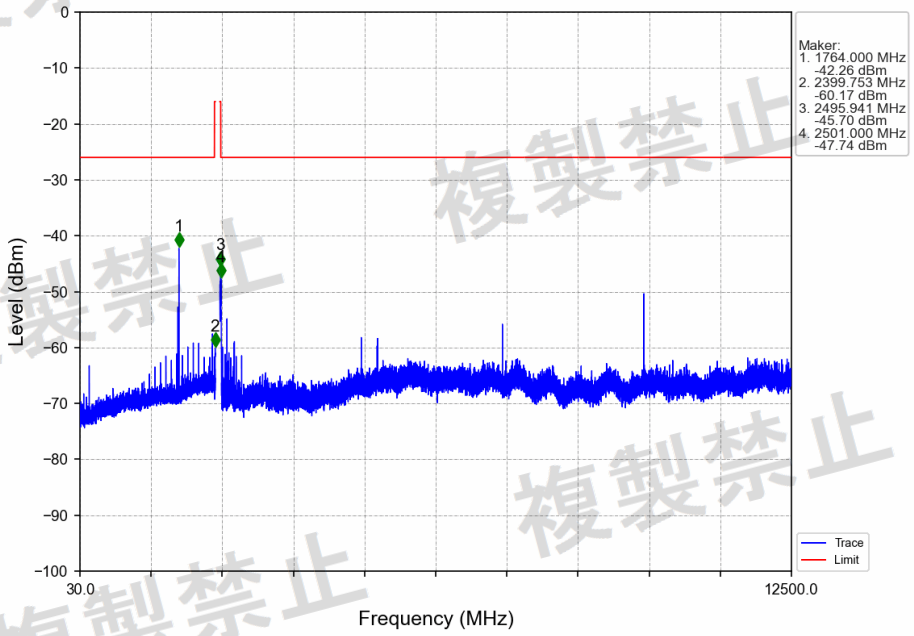

1M_2480MHz_Ant1_NTHV

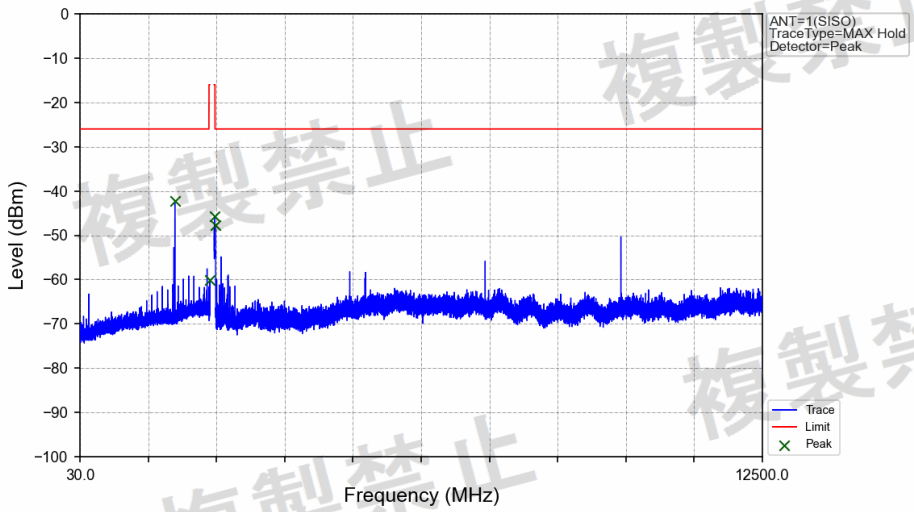

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	2387	1	1	1764.000	-42.26	/	-26	Pass
2387	2400	1	1	2399.753	-60.17	/	-16	Pass
2483.5	2496.5	1	1	2495.941	-45.70	/	-16	Pass
2496.5	12500	1	1	2501.000	-47.74	/	-26	Pass

2M_2402MHz_Ant1_NTHV

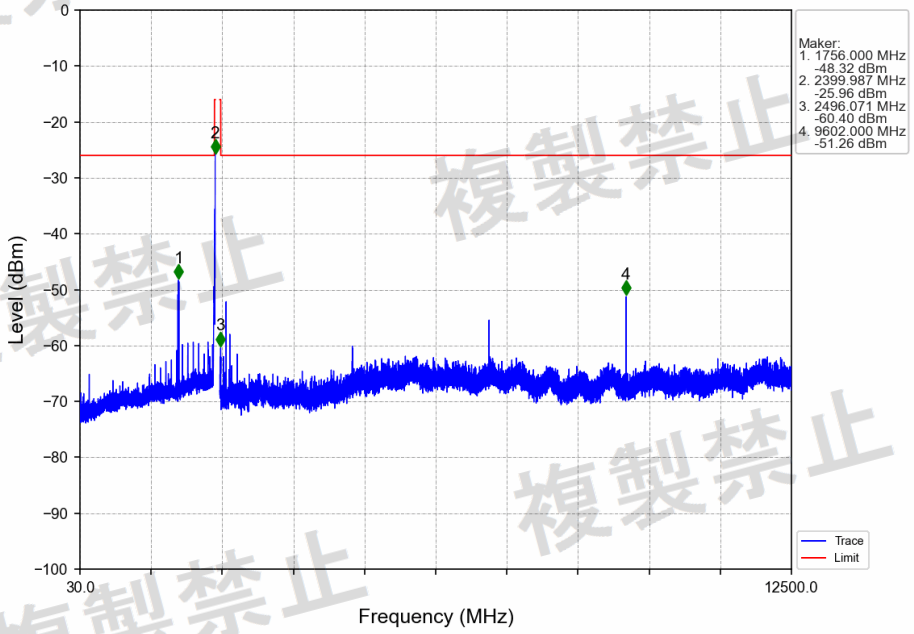

2M_2402MHz_Ant1_NTHV

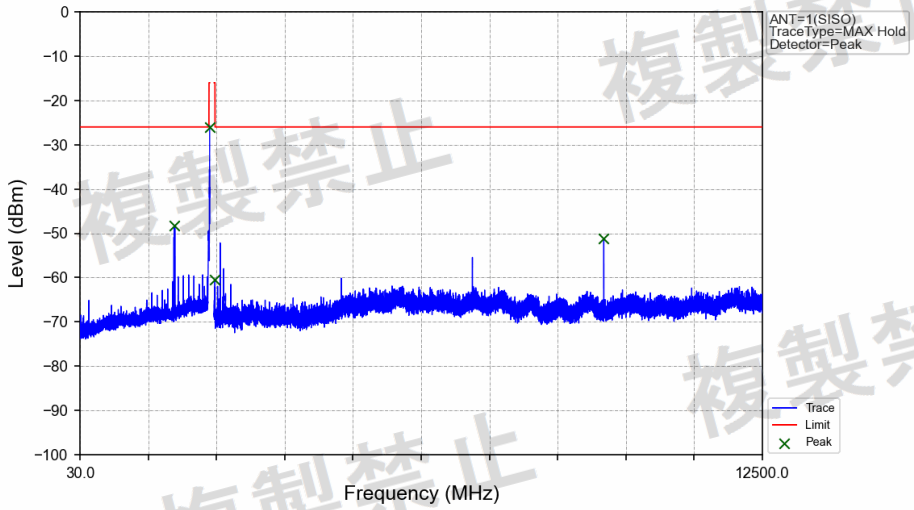

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	2387	1	1	1756.000	-48.32	/	-26	Pass
2387	2400	1	1	2399.987	-25.96	/	-16	Pass
2483.5	2496.5	1	1	2496.071	-60.40	/	-16	Pass
2496.5	12500	1	1	9602.000	-51.26	/	-26	Pass

2M_2480MHz_Ant1_NTHV

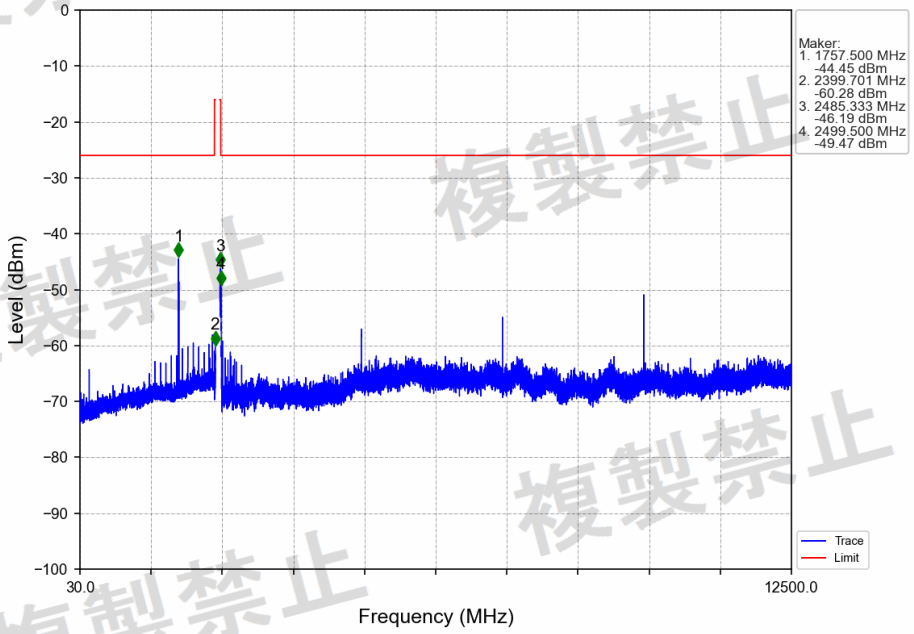

2M_2480MHz_Ant1_NTHV

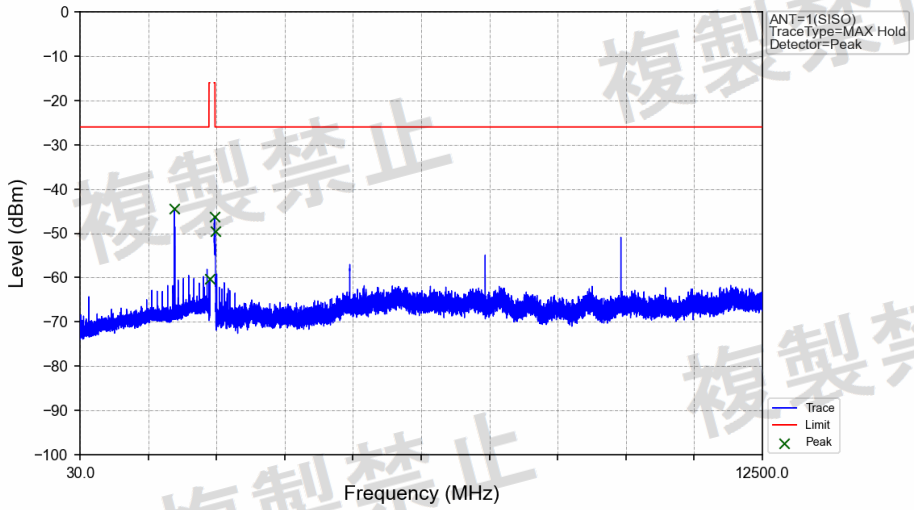

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	2387	1	1	1757.500	-44.45	/	-26	Pass
2387	2400	1	1	2399.701	-60.28	/	-16	Pass
2483.5	2496.5	1	1	2485.333	-46.19	/	-16	Pass
2496.5	12500	1	1	2499.500	-49.47	/	-26	Pass

5. Secondary Radiated Emission

5.1 Test Result

5.1.1 RxSe_NTNV

NTNV												
Mode	TX Type	Freq. (MHz)	ANT	Freq. Range		Marker					Limit (nW)	Verdict
				Start (MHz)	Stop (MHz)	Freq. (MHz)	PK Power (dBm)	PK Power (nW)	AV Power (dBm)	AV Power (nW)		
1M	SISO	2402	1	30	1000	720.45	-76.72	0.021	/	/	4	Pass
				1000	12500	10052.5	-61.30	0.741	/	/	20	Pass
		2480	1	30	1000	791.95	-76.62	0.022	/	/	4	Pass
				1000	12500	5953.5	-61.08	0.780	/	/	20	Pass
2M	SISO	2402	1	30	1000	849.5	-76.33	0.023	/	/	4	Pass
				1000	12500	7711.5	-61.10	0.776	/	/	20	Pass
		2480	1	30	1000	695	-76.83	0.021	/	/	4	Pass
				1000	12500	5959	-60.86	0.820	/	/	20	Pass

5.1.2 RxSe_NTLV

NTLV												
Mode	TX Type	Freq. (MHz)	ANT	Freq. Range		Marker					Limit (nW)	Verdict
				Start (MHz)	Stop (MHz)	Freq. (MHz)	PK Power (dBm)	PK Power (nW)	AV Power (dBm)	AV Power (nW)		
1M	SISO	2402	1	30	1000	904.1	-76.45	0.023	/	/	4	Pass
				1000	12500	11973	-61.39	0.726	/	/	20	Pass
		2480	1	30	1000	912.45	-76.77	0.021	/	/	4	Pass
				1000	12500	5882.5	-60.71	0.849	/	/	20	Pass
2M	SISO	2402	1	30	1000	760.45	-75.84	0.026	/	/	4	Pass
				1000	12500	5991	-60.78	0.836	/	/	20	Pass
		2480	1	30	1000	908.25	-76.61	0.022	/	/	4	Pass
				1000	12500	7244	-61.15	0.767	/	/	20	Pass

5.1.3 RxSe_NTHV

NTHV												
Mode	TX Type	Freq. (MHz)	ANT	Freq. Range		Marker					Limit (nW)	Verdict
				Start (MHz)	Stop (MHz)	Freq. (MHz)	PK Power (dBm)	PK Power (nW)	AV Power (dBm)	AV Power (nW)		
1M	SISO	2402	1	30	1000	893.6	-75.25	0.030	/	/	4	Pass
				1000	12500	7706.5	-61.25	0.750	/	/	20	Pass
		2480	1	30	1000	882.4	-76.19	0.024	/	/	4	Pass
				1000	12500	5922.5	-61.21	0.757	/	/	20	Pass
2M	SISO	2402	1	30	1000	997.55	-76.20	0.024	/	/	4	Pass
				1000	12500	5788.5	-60.72	0.847	/	/	20	Pass
		2480	1	30	1000	766.8	-76.57	0.022	/	/	4	Pass
				1000	12500	5897	-60.35	0.923	/	/	20	Pass

複製禁止

5.2 Test Graph

5.2.1 RxSe_NTNV

1M_2402MHz_Ant1_NTNV

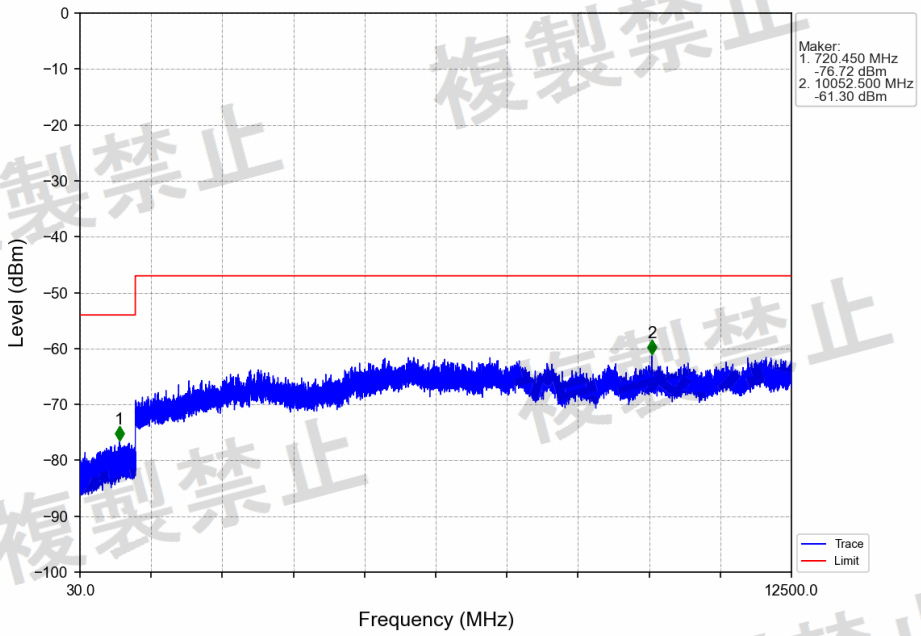

1M_2402MHz_Ant1_NTNV

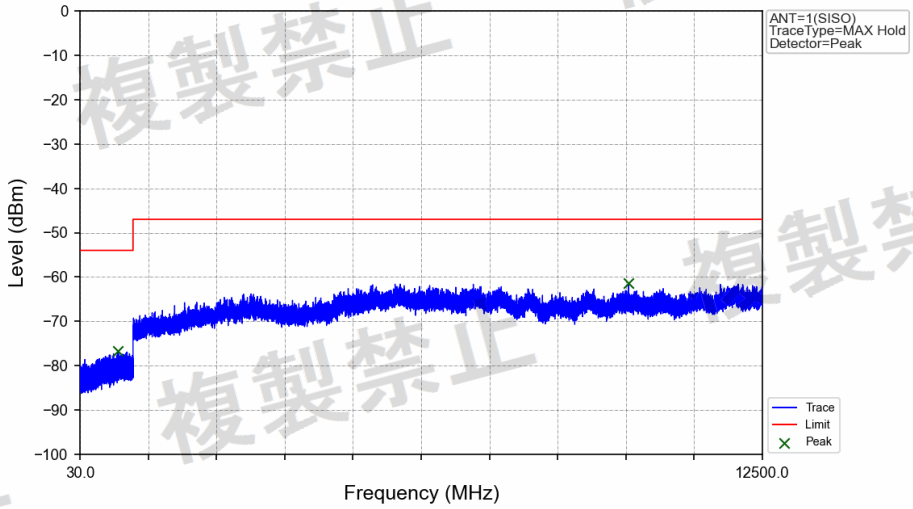

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	1000	0.1	0.1	720.450	-76.72	/	-54	Pass
1000	12500	1	1	10052.500	-61.30	/	-47	Pass

1M_2480MHz_Ant1_NTNV

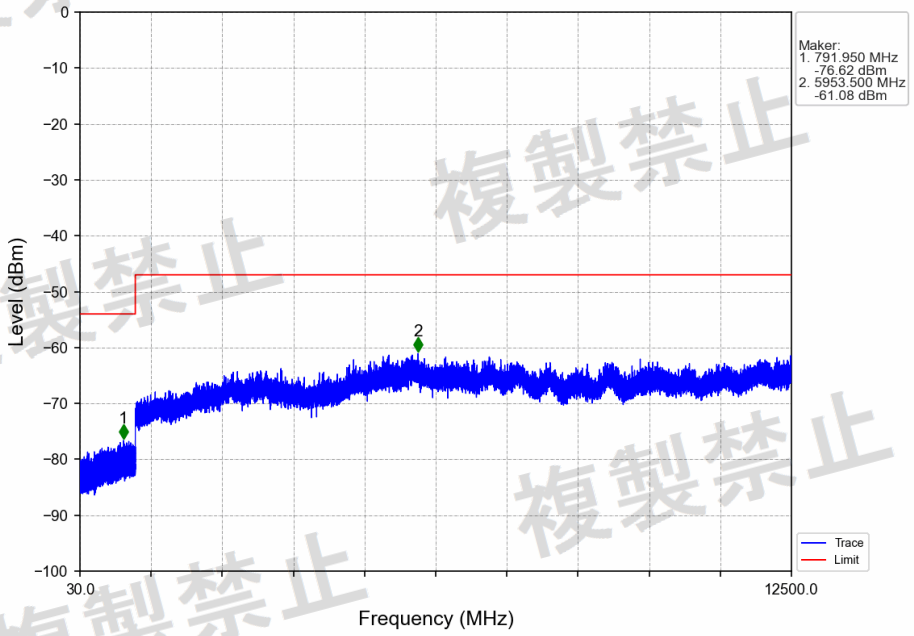

1M_2480MHz_Ant1_NTNV

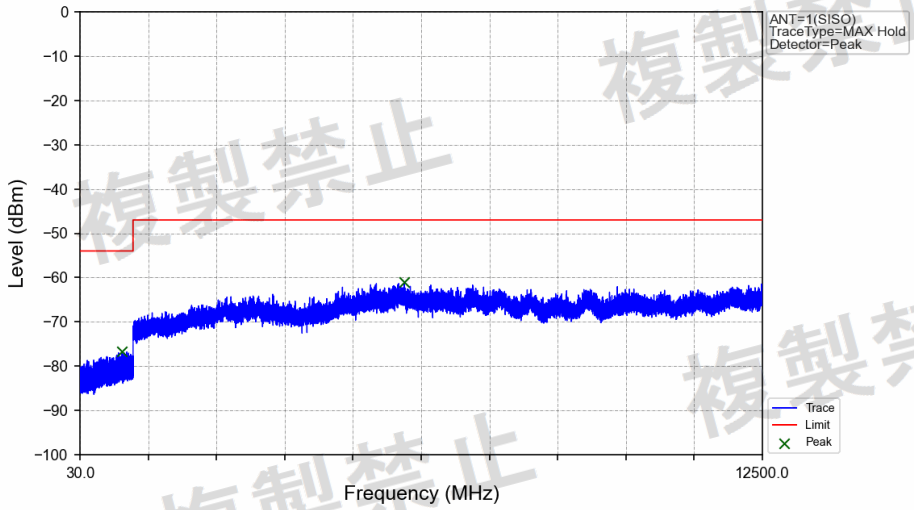

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	1000	0.1	0.1	791.950	-76.62	/	-54	Pass
1000	12500	1	1	5953.500	-61.08	/	-47	Pass

2M_2402MHz_Ant1_NTNV

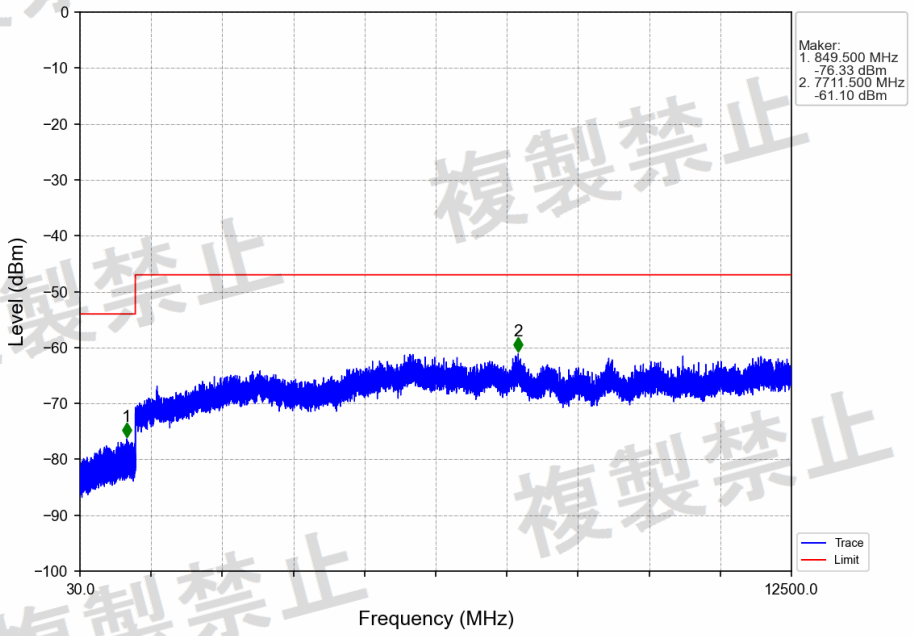

2M_2402MHz_Ant1_NTNV

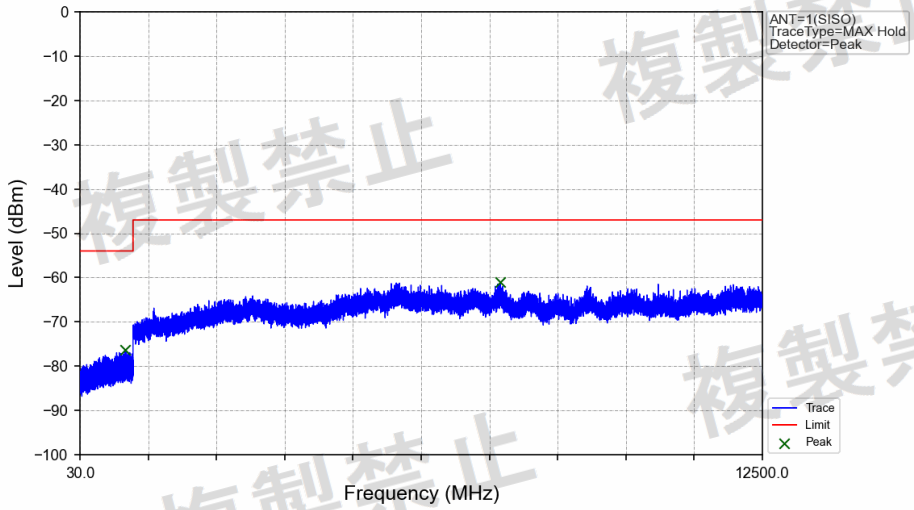

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	1000	0.1	0.1	849.500	-76.33	/	-54	Pass
1000	12500	1	1	7711.500	-61.10	/	-47	Pass

2M_2480MHz_Ant1_NTNV

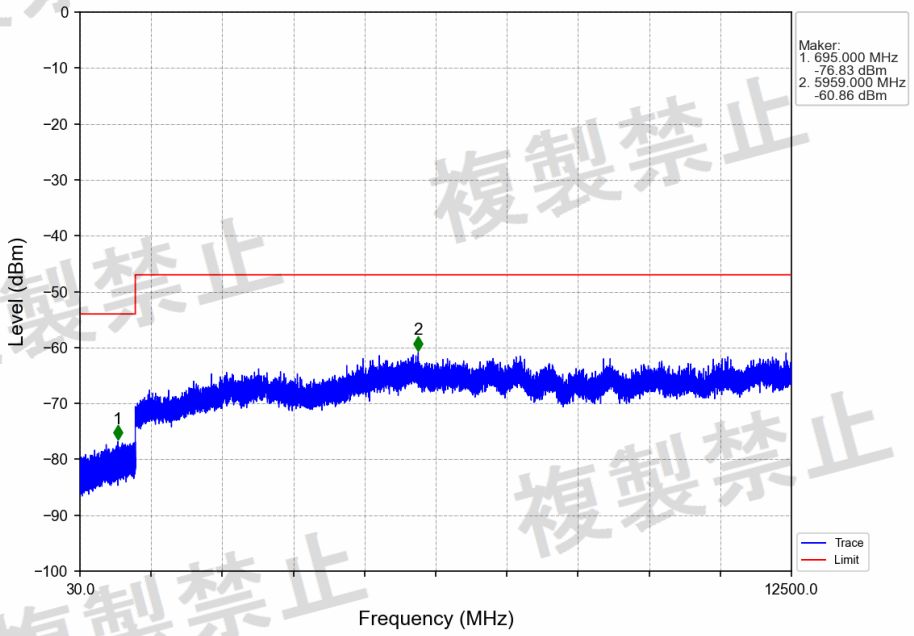

2M_2480MHz_Ant1_NTNV

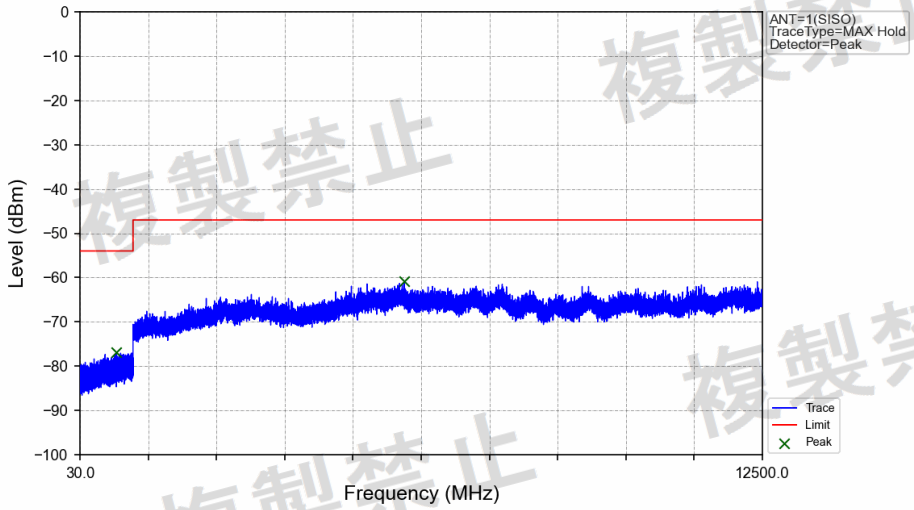

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	1000	0.1	0.1	695.000	-76.83	/	-54	Pass
1000	12500	1	1	5959.000	-60.86	/	-47	Pass

5.2.2 RxSe_NTLV

1M_2402MHz_Ant1_NTLV

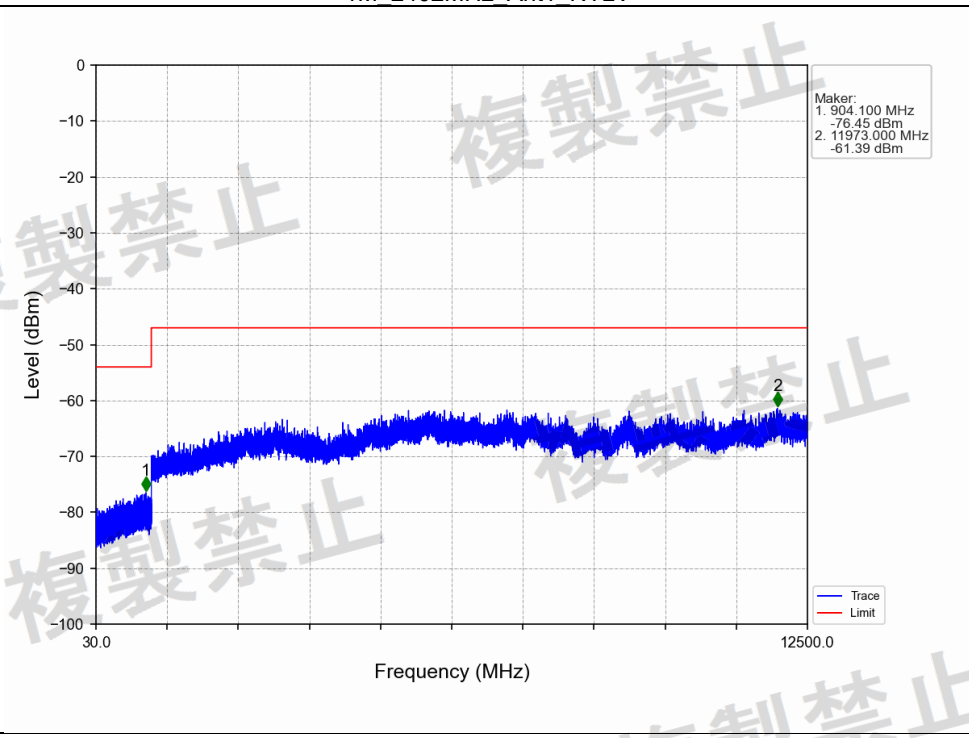

1M_2402MHz_Ant1_NTLV

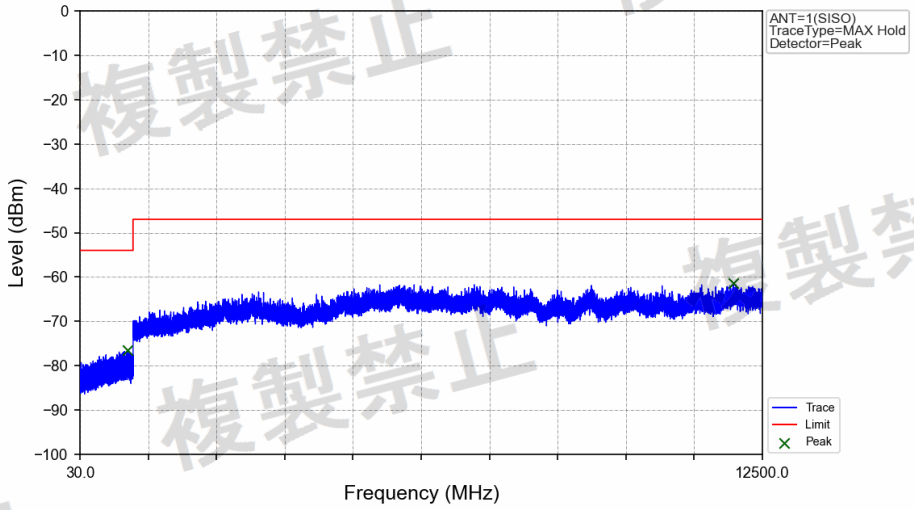

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	1000	0.1	0.1	904.100	-76.45	/	-54	Pass
1000	12500	1	1	11973.000	-61.39	/	-47	Pass

1M_2480MHz_Ant1_NTLV

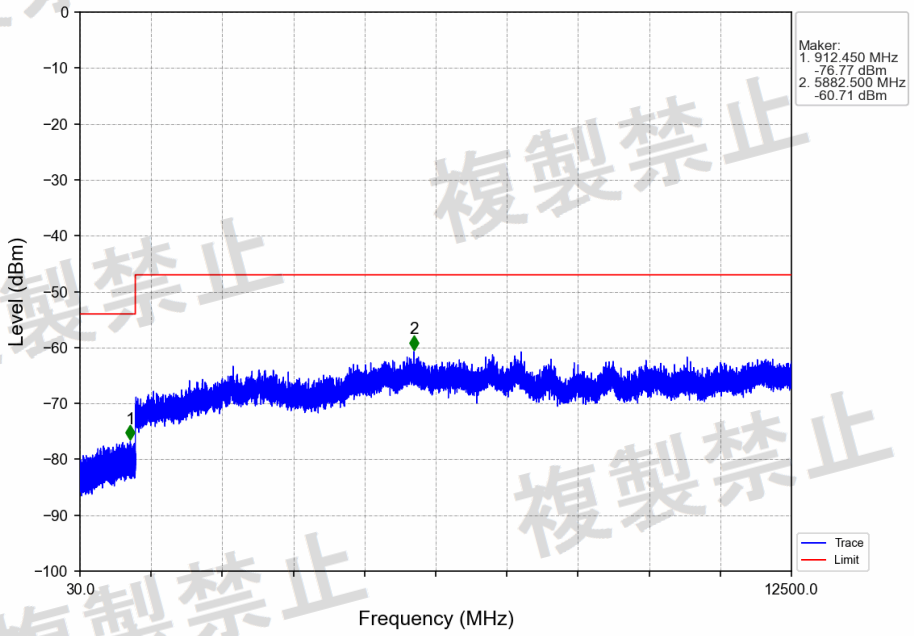

1M_2480MHz_Ant1_NTLV

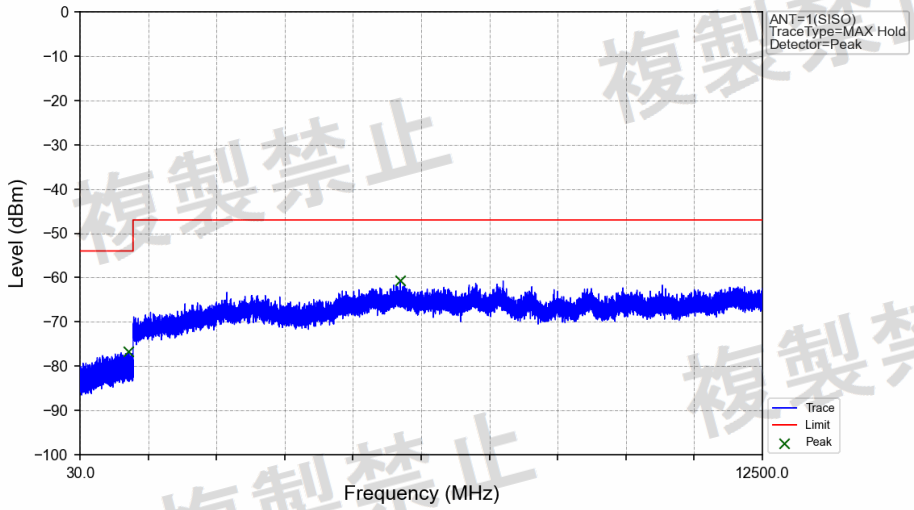

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	1000	0.1	0.1	912.450	-76.77	/	-54	Pass
1000	12500	1	1	5882.500	-60.71	/	-47	Pass

2M_2402MHz_Ant1_NTLV

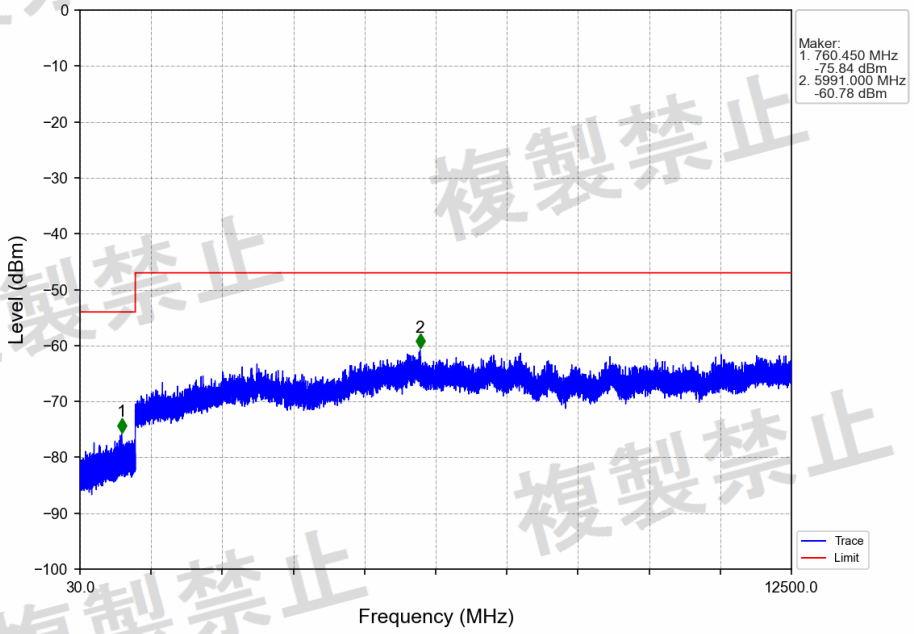

2M_2402MHz_Ant1_NTLV

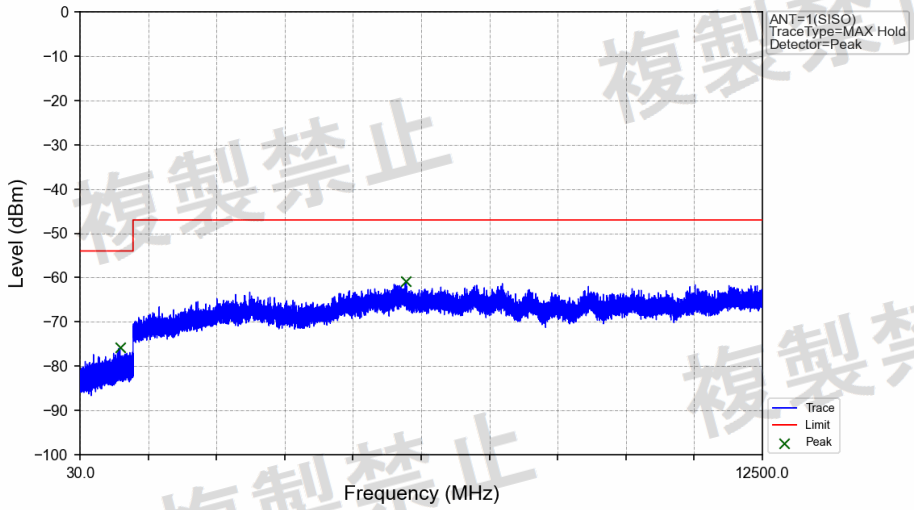

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	1000	0.1	0.1	760.450	-75.84	/	-54	Pass
1000	12500	1	1	5991.000	-60.78	/	-47	Pass

2M_2480MHz_Ant1_NTLV

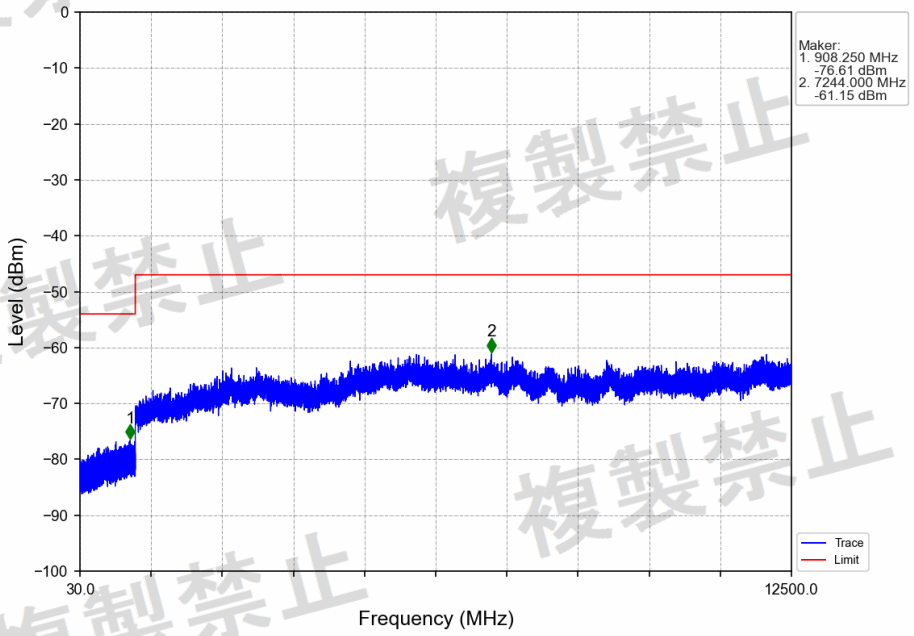

2M_2480MHz_Ant1_NTLV

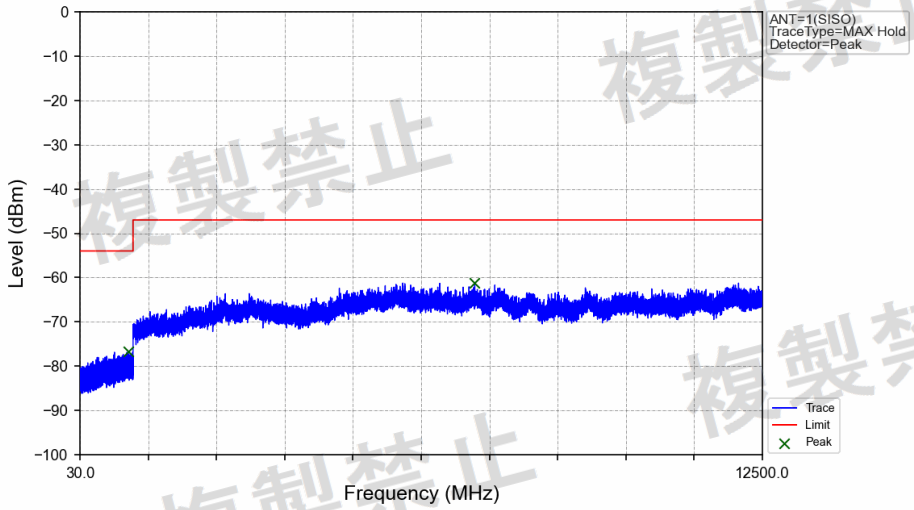

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	1000	0.1	0.1	908.250	-76.61	/	-54	Pass
1000	12500	1	1	7244.000	-61.15	/	-47	Pass

5.2.3 RxSe_NTHV

1M_2402MHz_Ant1_NTHV

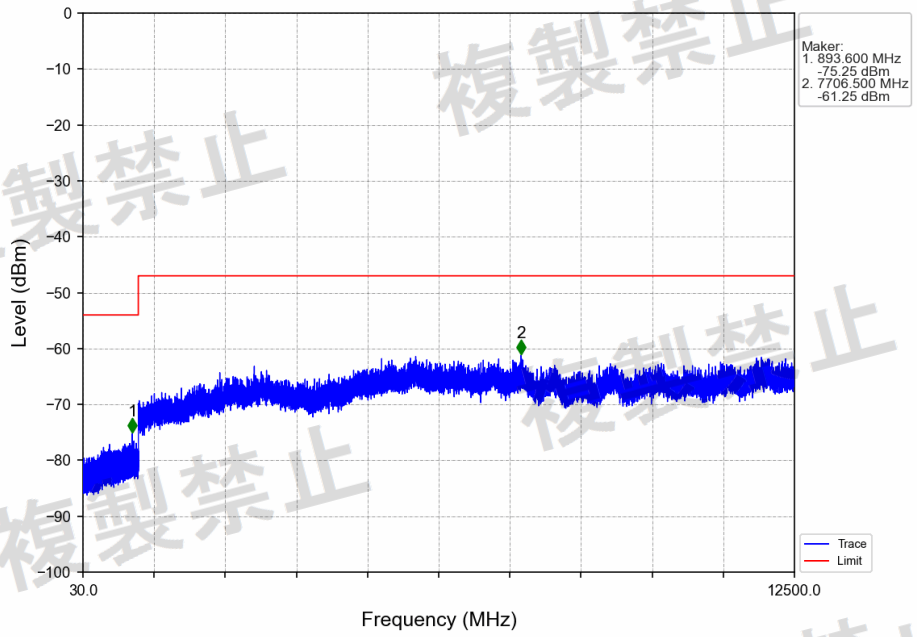

1M_2402MHz_Ant1_NTHV

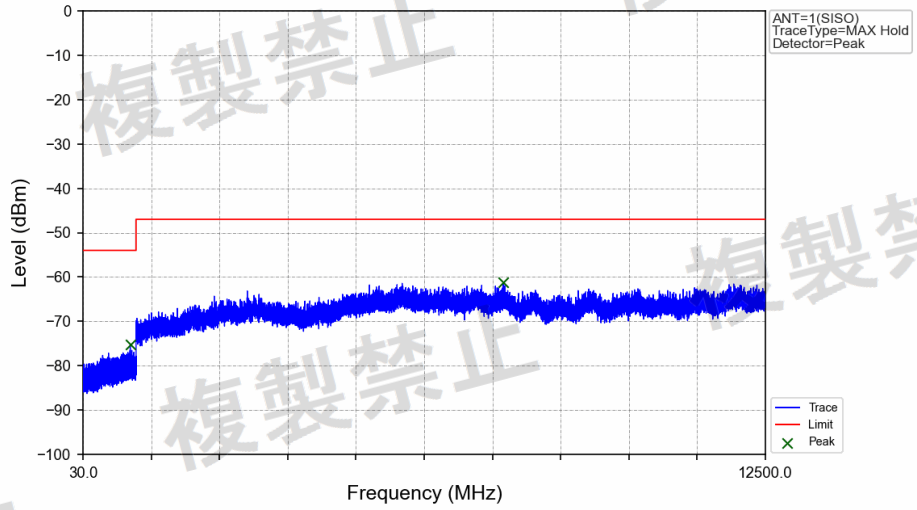

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	1000	0.1	0.1	893.600	-75.25	/	-54	Pass
1000	12500	1	1	7706.500	-61.25	/	-47	Pass

1M_2480MHz_Ant1_NTHV

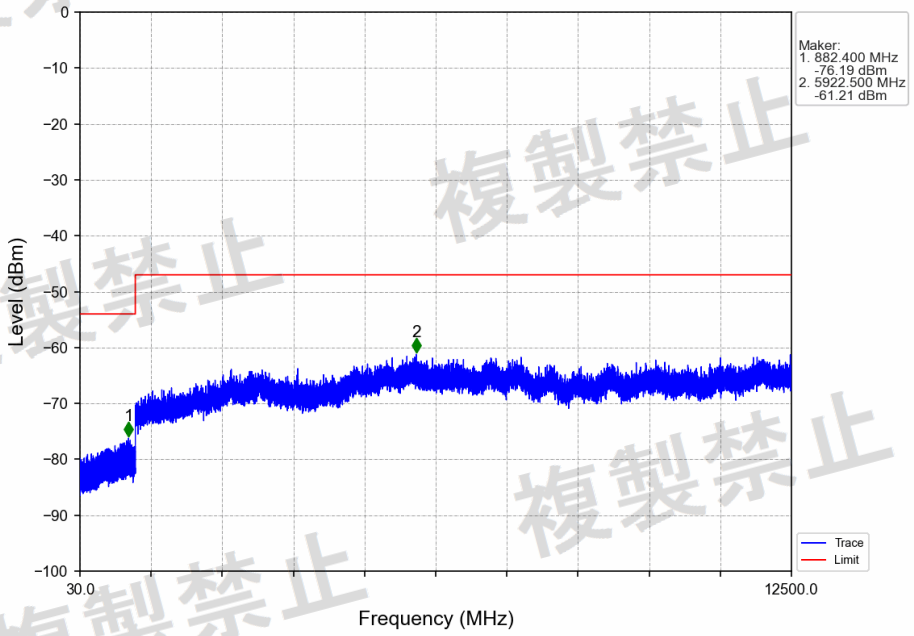

1M_2480MHz_Ant1_NTHV

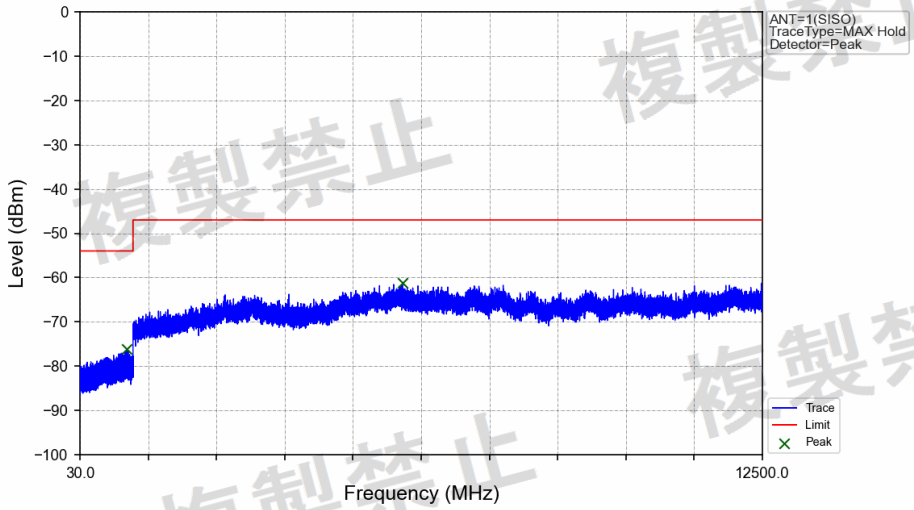

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	1000	0.1	0.1	882.400	-76.19	/	-54	Pass
1000	12500	1	1	5922.500	-61.21	/	-47	Pass

2M_2402MHz_Ant1_NTHV

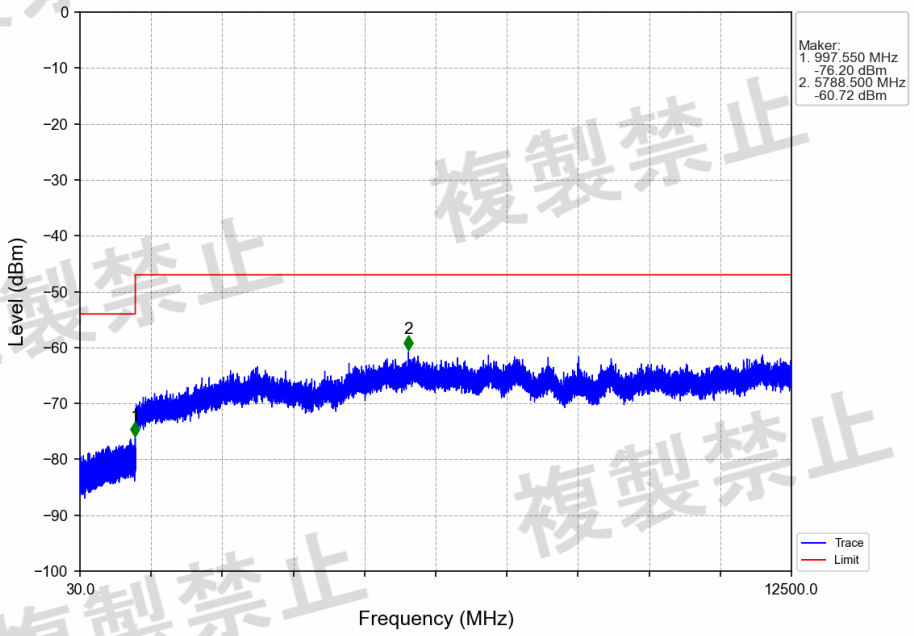

2M_2402MHz_Ant1_NTHV

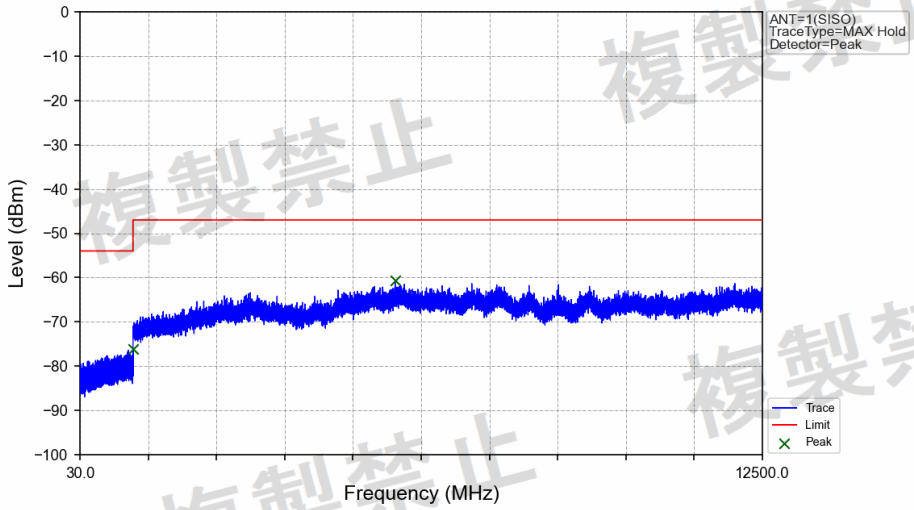

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	1000	0.1	0.1	997.550	-76.20	/	-54	Pass
1000	12500	1	1	5788.500	-60.72	/	-47	Pass

2M_2480MHz_Ant1_NTHV

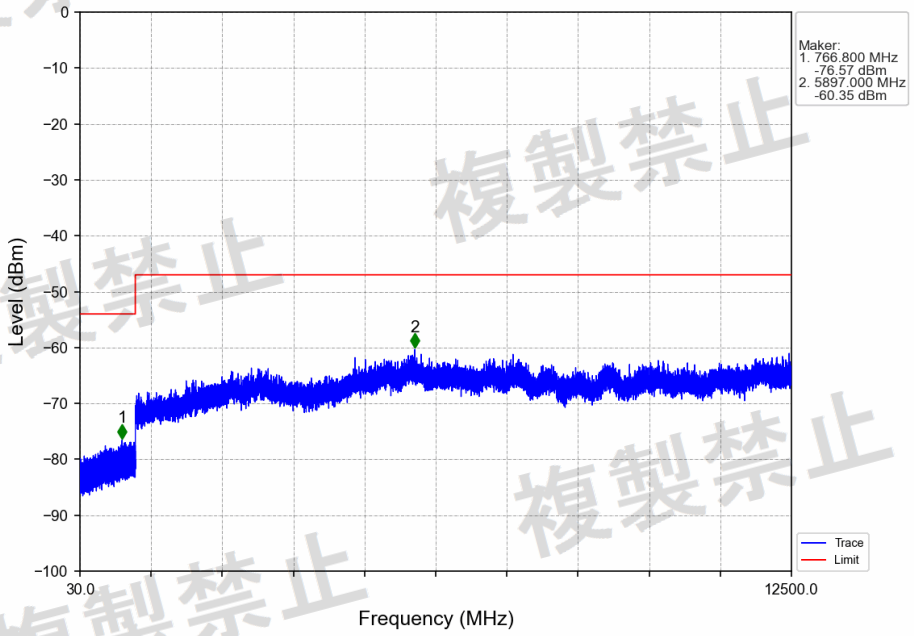

2M_2480MHz_Ant1_NTHV

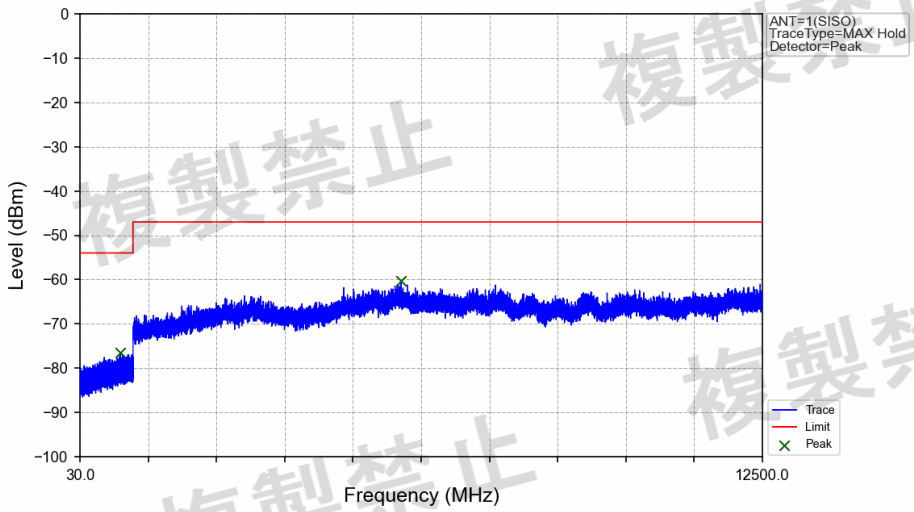

Start (MHz)	Stop (MHz)	RBW (MHz)	VBW (MHz)	Freq (MHz)	PK Power (dBm)	AV Power (dBm)	Limit (dBm)	Result
30	1000	0.1	0.1	766.800	-76.57	/	-54	Pass
1000	12500	1	1	5897.000	-60.35	/	-47	Pass

********** **End of Report** **********

複製禁止