


Test report No:
2630030R.701B

MIC Test Report

Product Name	Smart Watch
Trademark	REDMI
Model and /or type reference	M2564W1
Applicant's name / address	Xiaomi Communications Co., Ltd. #019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
Test method requested, standard	Notification No. 88 Annex 43 Article 2 paragraph 1 item 19
Verdict Summary	IN COMPLIANCE
Documented by (name / position & signature)	Tim Cao / Project Manager 
Approved by (name / position & signature)	Frank He/Technical Manager 
Date of issue	2026-03-25
Report Version	V1.0
Report template No	Template_MIC-BT-RF-V1.0

INDEX

	page
Competences and Guarantees	4
General conditions	4
Environmental conditions	4
Possible test case verdicts	5
Abbreviations	5
Document History	6
Remarks and Comments	6
Used Equipment	7
Uncertainty	8
1 General Information	9
1.1 General Description of the Item(s)	9
1.2 Channel List	10
2 Description of Test Setup	11
2.1 Auxiliary equipment /Accessories/Test software for the EUT	11
2.2 Power setting in test	12
2.3 Test Voltage	13
3 Verdict summary section	14
3.1 Standards	14
3.2 Deviation(s) from the Standard(s) / Test Specification(s)	14
3.3 Overview of results	15
4 TEST ITEMS OF LIMIT/SETUP/PROCEDURE	16
4.1 Antenna Power Antenna Power Tolerance and E.I.R.P.	16
4.1.1 Limit	16
4.1.2 Test Set up	16
4.1.3 Test Procedure	17
4.2 Occupied Bandwidth	18
4.2.1 Limit	18
4.2.2 Test Setup	18
4.2.3 Test Procedure	19
4.3 Frequency Tolerance	20
4.3.1 Limit	20
4.3.2 Test Setup	20
4.3.3 Test Procedure	21

4.4	Dwell Time	22
4.4.1	Limit	22
4.4.2	Test Setup	22
4.4.3	Test Procedure	23
4.5	Transmitter Spurious Emission	24
4.5.1	Limit	24
4.5.2	Test Setup	24
4.5.3	Test Procedure	24
4.6	Receiver Spurious Emission	26
4.6.1	Limit	26
4.6.2	Test Setup	26
4.6.3	Test Procedure	26
4.7	Interference Prevention Function Measurement	28
4.7.1	Limit	28
4.7.2	Test Setup	29
4.7.3	Test Procedure	30
5	Conforming the structure that is difficult to open	31
6	Setup photo and EUT photo	32
7	Test Result	33
	Appendix A: Antenna Power Antenna Power Tolerance and E.I.R.P	33
	Appendix B: Occupied Bandwidth	34
	Appendix C: Frequency Tolerance	36
	Appendix D: Dwell Time	45
	Appendix E: Transmitter Spurious Emissions	49
	Appendix F: Receiver Spurious Emissions	75
	Appendix G: Interference Prevention Function	85

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Date(receive sample)	Mar. 06, 2026
Date (start test)	Mar. 10, 2026
Date (finish test)	Mar. 20, 2026

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	24°C
Relative Humidity air	60%

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
Tx	: Transmitter
Rx	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
2630030R.701B	V1.0	Initial issue of report.	2026-03-25

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with Article 2 paragraph 1 item 19.
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result.
4. The test results presented in this report relate only to the object tested.
5. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
6. This report will not be used for social proof function in China market.
7. DEKRA declines any responsibility with the following test data provided by customer that may affect the validity of result:
 - Chapter 1.1 General Description of the Item(s);
 - Chapter 1.2 Channel List.

USED EQUIPMENT

Conducted Test/ TR8

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date	Firmware Version	Software version	Calibration Body	Calibration Method
Wireless Connectivity Tester	R&S	CMW 270	102593	2025.05.10	2026.05.09	V 4.0.60	N/A	CEPREI	c
Temperature/Humidity Meter	RTS	RTS-8S	RF07	2025.06.17	2026.06.16	N/A	N/A	CEPREI	c
Test system									
Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date	Firmware Version	Software version	Calibration Body	Calibration Method
MAX Signal Analyzer	Keysight	N9010A	MY48030494	2025.09.20	2026.09.19	A.14.03	N/A	CEPREI	c
RF Control Unit	Tonscend	JS0806-2	22G8060594	2026.01.26	2027.01.25	N/A	N/A	CEPREI	c
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY61252529	2025.03.23	2026.03.22	B.01.96	N/A	CEPREI	c
Frequency extender for EXG or MXG	Keysight	N5182BX07	MY59362500	2025.03.23	2026.03.22	N/A	N/A	CEPREI	c
EXG-B MW Analog Signal Generator	Keysight	N5173B	MY61252566	2025.05.10	2026.05.09	B.01.95	N/A	GRGTES T	c
Calibration Method: (a) Calibration conducted by the National Institute of Information and Communications Technology (NICT) in Japan (hereinafter referred to as "NICT") or a designated calibration agency under Article 102-18 paragraph (1) in JRL. (b) Correction conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Act (Act No. 51 of 1992). (c) Calibration conducted in countries except Japan, which shall be equivalent to the calibration conducted by the NICT or a designated calibration agency under Article 102-18 paragraph (1). (d) Calibration, etc. conducted by using measuring instruments and other equipment listed in the right column of appended table No. 3, which shall have been given any type of calibration, etc. listed above from (a) to (c). the calibration corresponds to C described above. From TBL Article 87, paragraph 1, item 2 Notice: Calibration duration for above equipments is 1 year. CEPREI : China ceprei laboratory calibration & testing centre. DEKRA : DEKRA Testing and Certification (Suzhou) Co., Ltd. GRGTEST: Grg Metrology&Test (WuXi) Co.,Ltd.									

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Test item	Uncertainty
Antenna Power Antenna Power Tolerance and E.I.R.P	$\pm 1.27\text{dB}$
Spread Bandwidth and Spread Factor	$\pm 150\text{Hz}$
Occupied Bandwidth	$\pm 150\text{Hz}$
Frequency Tolerance	$\pm 150\text{Hz}$
Dwell Time	$\pm 2\text{ms}$
Transmitter Spurious Emissions	$\pm 1.27\text{dB}$
Receiver Spurious Emissions	$\pm 1.27\text{dB}$

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

Product Name:	Smart Watch						
Model Name:	M2564W1						
Trademark:	REDMI						
Hardware Version:	LTAM433						
Software Version:	3.230.087						
Power Supply:	3.87Vdc						
Manufacturer:	Xiaomi Communications Co., Ltd.						
Manufacturer address:	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085						
Test SN:	73677/B6AFMN5XA00637						
Wireless specification:	Bluetooth(BR&EDR)						
Operating frequency range(s):	2402~2480MHz						
Type of Modulation:	GFSK; Pi/4 DQPSK; 8DPSK						
PHYs:	☒	GFSK	☒	Pi/4 DQPSK	☒	8DPSK	
Data Rate:	☒	1Mbit/s	☒	2Mbit/s	☒	3Mbit/s	
Number of channel:	79						
Declared Power:	1.0 mW/MHz for normal mode 1.0 mW/MHz for AFH mode						
Antenna Type:	FPC Antenna						
Antenna Gain:	-2.6dBi						

Remark:

As above information is provided and confirmed by the applicant. DEKRA is not liable to the accuracy, suitability, reliability or/and integrity of the information.

1.2 Channel List

Bluetooth Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2403 MHz	02	2404 MHz	03	2405 MHz
04	2406 MHz	05	2407 MHz	06	2408 MHz	07	2409 MHz
08	2410 MHz	09	2411 MHz	10	2412 MHz	11	2413 MHz
12	2414 MHz	13	2415 MHz	14	2416 MHz	15	2417 MHz
16	2418 MHz	17	2419 MHz	18	2420 MHz	19	2421 MHz
20	2422 MHz	21	2423 MHz	22	2424 MHz	23	2425 MHz
24	2426 MHz	25	2427 MHz	26	2428 MHz	27	2429 MHz
28	2430 MHz	29	2431 MHz	30	2432 MHz	31	2433 MHz
32	2434 MHz	33	2435 MHz	34	2436 MHz	35	2437 MHz
36	2438 MHz	37	2439 MHz	38	2440 MHz	39	2441 MHz
40	2442 MHz	41	2443 MHz	42	2444 MHz	43	2445 MHz
44	2446 MHz	45	2447 MHz	46	2448 MHz	47	2449 MHz
48	2450 MHz	49	2451 MHz	50	2452 MHz	51	2453 MHz
52	2454 MHz	53	2455 MHz	54	2456 MHz	55	2457 MHz
56	2458 MHz	57	2459 MHz	58	2460 MHz	59	2461 MHz
60	2462 MHz	61	2463 MHz	62	2464 MHz	63	2465 MHz
64	2466 MHz	65	2467 MHz	66	2468 MHz	67	2469 MHz
68	2470 MHz	69	2471 MHz	70	2472 MHz	71	2473 MHz
72	2474 MHz	73	2475 MHz	74	2476 MHz	75	2477 MHz
76	2478 MHz	77	2479 MHz	78	2480 MHz	N/A	N/A

Note: The General Description of the Item, Channel List in clause 1 are provided and confirmed by the client.

2 DESCRIPTION OF TEST SETUP

2.1 Auxiliary equipment /Accessories/Test software for the EUT

Auxiliary equipment	Type / Version	Manufacturer	Supplied by
(1) Notebook	Think pad x220	Lenovo	Adapter
(2) USB Control Cable	N/A	N/A	N/A
N/A	N/A	N/A	N/A
software	Type / Version		
sscom	5.13.1		

Accessories Information	Cable		
	Length used during test [m]	Attached during test	Shielded
(2)USB Control Cable	1	☒	☐

2.2 Power setting in test

Mode	Channel	Frequency (MHz)	Power setting
BR&EDR-DH5	00~78	2402~2480	41
BR&EDR-2DH5	00~78	2402~2480	41
BR&EDR-3DH5	00~78	2402~2480	41
AFH-DH5	00~19	2402~2421	41
AFH-2DH5	00~19	2402~2421	41
AFH-3DH5	00~19	2402~2421	41

Note: power of AFH mode is lower than that of normal mode, so only the worst-case scenario data is included in the report.

2.3 Test Voltage

Power supply voltage fluctuation test

Voltage Fluctuation Test	Normal Voltage	High Voltage Normal Voltage +10% of	Low Voltage Normal Voltage -10% of
Input To EUT	DC 3.87V	DC 4.257V	DC 3.483V
Test Result	1.2V	1.2V	1.2V
Voltage Variation	Reference	0%	0%

Note:

Changing the supply voltage of the EUT will not change the voltage of the RF module.

During the input supply voltage to the EUT from the external power source is varied by +/- 10%, if output voltage had been confirmed that the fluctuation of power supply to the RF circuit of EUT (excluding power source) is equal to or less than +/-1%. Exempt extremely high and low supply voltage condition test, EUT only operated in normal voltage to test all regulations.

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
Article 2 paragraph 1 item (19)	2023	2.4GHz Band Advanced Low Power Data Communication System
Notification No. 88 Annex 43.	2004	Test methods for radio equipment listed in Article 2, Paragraph 1, Item 19 and Item 19-2-2 of Certification Ordinance
--	--	--

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

No deviation

3.3 Overview of results

Test Item - MIC notification 88 Annex 43				
Performed Test Item	Normative References	Test Performed	Verdict	Remark
Antenna Power Antenna Power Tolerance and E.I.R.P	MIC notification 88 Annex 43 section 6	Yes	PASS	Test data please refer to Appendix A
Occupied Bandwidth	MIC Notification 88 Annex 43 section 4	Yes	PASS	Test data please refer to Appendix B
Frequency Tolerance	MIC Notification 88 Annex 43 section 3	Yes	PASS	Test data please refer to Appendix C
Dwell Time	MIC Notification 88 Annex 43 section 13	Yes	PASS	Test data please refer to Appendix D
Transmitter Spurious Emissions	MIC Notification 88 Annex 43 section 7	Yes	PASS	Test data please refer to Appendix E
Receiver Spurious Emissions	MIC Notification 88 Annex 43 section 7	Yes	PASS	Test data please refer to Appendix F
Interference Prevention Function	MIC Notification 88 Annex 43 section 12	Yes	PASS	Test data please refer to Appendix G

4 TEST ITEMS OF LIMIT/SETUP/PROCEDURE

4.1 Antenna Power Antenna Power Tolerance and E.I.R.P

VERDICT: PASS

4.1.1 Limit

Standard Article 2 Paragraph 1 item 19

Output Power

- | | |
|-------------------------------------|---|
| ☒ | Channel Power of DSSS, the limit should $\leq 10\text{mW/MHz}$ |
| ☒ | Channel Power of FHSS, the limit should $\leq 3\text{mW/MHz}$ |
| ☐ | Channel Power of OFDM |
| ☐ | Nominal Bandwidth = 20MHz, the limit should $\leq 10\text{mW/MHz}$ |
| ☐ | Nominal Bandwidth = 40MHz, the limit should $\leq 5\text{mW/MHz}$ |
| ☐ | Channel Power of other situation, the limit should $\leq 10\text{mW}$ |


EIRP

- | | |
|-------------------------------------|-----------------------------------|
| ☒ | Undirected: 6.91dBm/MHz or less |
| ☒ | Driectional: 16.91dBm/MHz or less |

Output Power Tolerance

- | | |
|-------------------------------------|------------------------------|
| ☒ | Output Power Tolerance: +20% |
|-------------------------------------|------------------------------|

4.1.2 Test Set up

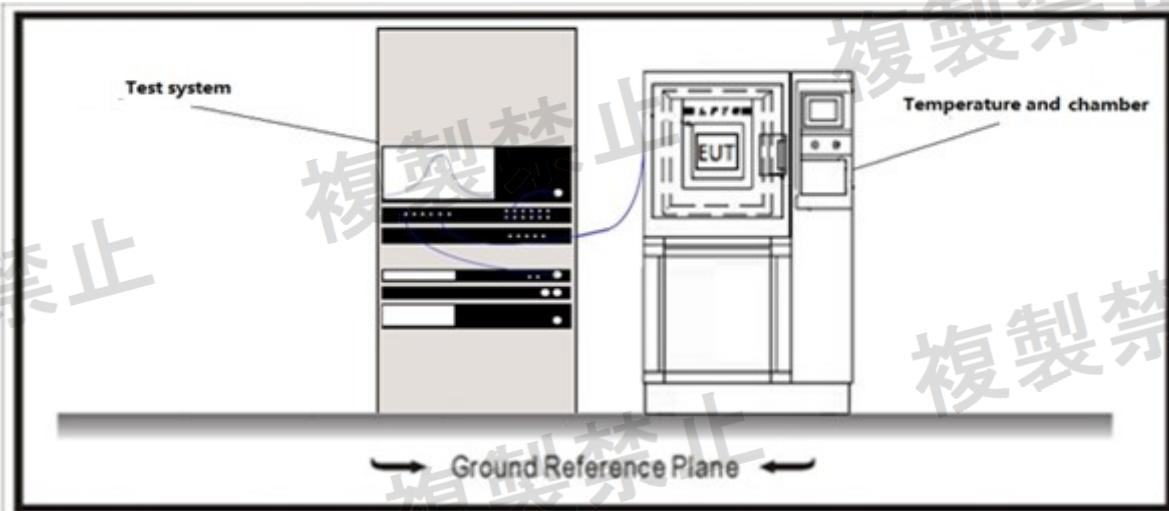

4.1.3 Test Procedure

References Rule

☒ MIC Notification 88 Annex 43

Step 1. Condition of measuring instrument

(1) Measure the equivalent noise bandwidth at the resolution bandwidth of 1 MHz of the spectrum analyzer, correct the bandwidth to the 1 MHz equivalent bandwidth, and read the displayed value. However, when the spread bandwidth is 1 MHz or less, correction shall be performed only when "spread bandwidth (MHz)/equivalent noise bandwidth (MHz)" exceeds 1.

(2) The attenuation of the dummy load (attenuator) shall be the value that gives the optimum operating input level to the spectrum analyzer.

(3) Set the spectrum analyzer as follows when searching for the frequency that gives the maximum antenna power.

Center frequency	Test frequency
Sweep frequency width	About twice the occupied frequency bandwidth
Resolution bandwidth	1MHz
Video bandwidth	About three times the resolution bandwidth
Sweep time	Minimum time for guaranteed measurement accuracy
(In the case of burst waves, the time at which one or more bursts are included per sample)	

Trigger condition	Free run
Sweep mode	Continuous sweep
Detection mode	positive peak
Display mode	Max hold

(4) Set the spectrum analyzer as follows when measuring the antenna power.

Center frequency The frequency that gives the maximum power (searched frequency)

Sweep frequency width	0Hz
Resolution bandwidth	1MHz
Video bandwidth	Same as resolution bandwidth
Sweep mode	Continuous sweep

Step 2. Measurement procedure

a. Confirming in the submitted document that the frequency hopping intervals in the frequency distribution of frequency hopping are equal intervals of 1 MHz or less, and that the probability of occurrence at each hopping frequency is uniform, and that the probability of occurrence at each hopping frequency is uniform. If it is, it is implemented by the following method.

(a) Connect a high frequency power meter to the output of the dummy load (attenuator) and measure the total power.

(b) Divide the total power by the spreading bandwidth to calculate the average power per 1 MHz.

(c) Antenna power shall be as follows.


A Value of (b) for continuous wave

B For burst wave Average power in burst is calculated from the value of (b) and the transmission time rate.

b. If the frequency distribution of frequency hopping or the probability of occurrence at each hopping frequency is not uniform, set the spectrum analyzer as in Step1(3) to search for the frequency that gives the maximum antenna power, and then perform spectrum analysis. Set the device as in Step1(4), and measure the antenna power at the frequency that gives the maximum power.

4.2 Occupied Bandwidth	VERDICT: PASS
------------------------	---------------

4.2.1 Limit	
Standard	Article 2 Paragraph 1 item 19
≤ 26 MHz for DSSS&OFDM, ≤ 83.5 MHz for FHSS, ≤ 38 MHz for OFDM(Wide-band)	

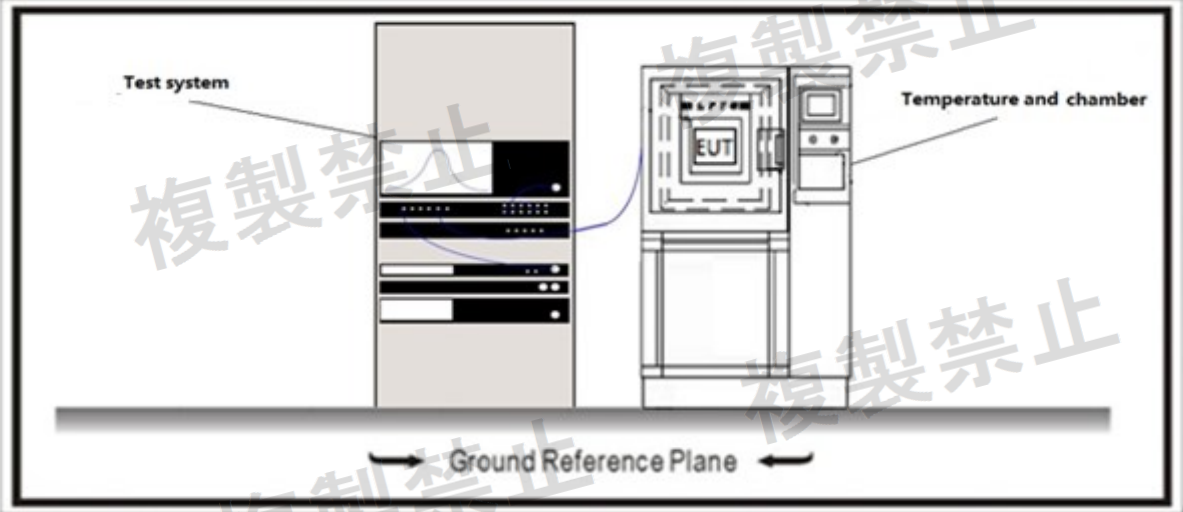4.2.2 Test Setup


4.2.3 Test Procedure

References Rule

☒	MIC Notification 88 Annex 43
-------------------------------------	------------------------------

Step 1

1.Set spectrum analyzer to following setting:

Center frequency: Euqal to center frequency of test signal

Span: Between 2 times and 3.5 times the limited bandwidth.

RBW: Less than 3% of the limited bandwidth

VBW: Equal to RBW

Sweep mode: Continous sweep

Detect mode: Positive peak

Trace mode: Max hold

2.The integrated 99% power bandwidth function may be used to measure the spread bandwidth.

4.3 Frequency Tolerance

VERDICT: PASS


4.3.1 Limit

Standard

Article 2 Paragraph 1 item 19

$\leq \pm 50$ ppm

4.3.2 Test Setup

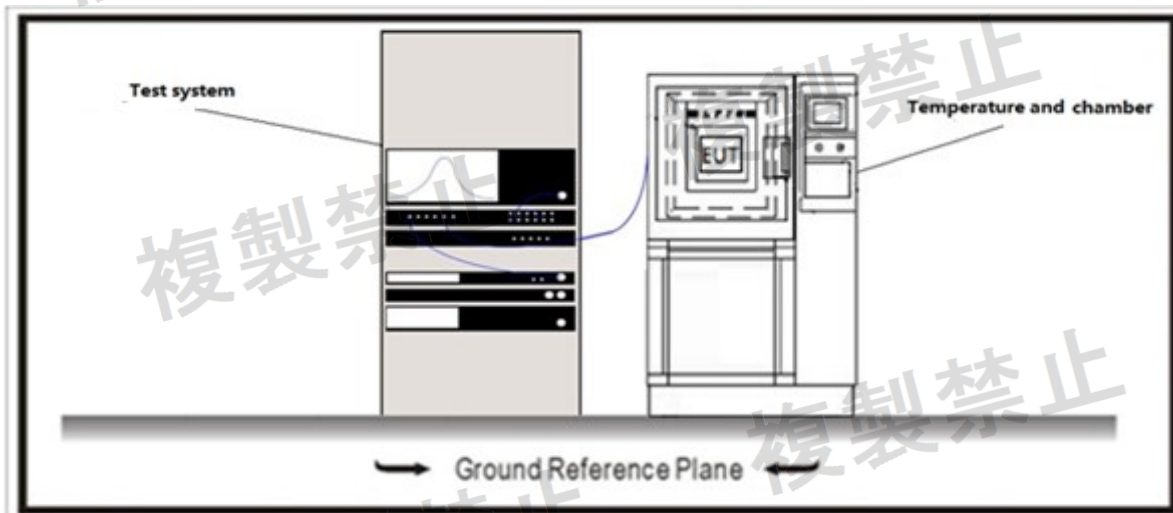

4.3.3 Test Procedure

References Rule

☒ MIC Notification 88 Annex 43

The measurement accuracy of the frequency meter shall be 1/10 or less of the permissible value specified in the equipment regulations.

☐ Unmodulation Wave (CW signal)

- Set spectrum analyzer as following setting:
Center frequency: Equal to center frequency of signal under test
Span: Widest enough to see the entire waveform
RBW: 3kHz
VBW: 10kHz
Detect mode: Positive Peak
Trace mode: Max hold
Sweep time: Auto
- Use the peak search function to find the highest level frequency and record data.

☒ Modulation Wave

- Set spectrum analyzer to following setting:
Center frequency: Equal to center frequency of signal under test
Span: Widest enough to see the entire waveform
RBW: 100kHz
VBW: 100kHz
Detect mode: Positive Peak
Trace mode: Max hold
Sweep time: Auto
- Use the peak search function to find the highest level frequency, record maximum level.
- Setting display line to 10dB lower than the maximum level.
- Mark the lowest and highest frequency where the test signal intersect the display line, record the frequency F_L , F_H .
- The Center frequency of test $F_C = (F_L + F_H)/2$

4.4 Dwell Time

VERDICT: PASS


4.4.1 Limit

Standard

Article 2 Paragraph 1 item 19

≤ 400 ms

4.4.2 Test Setup

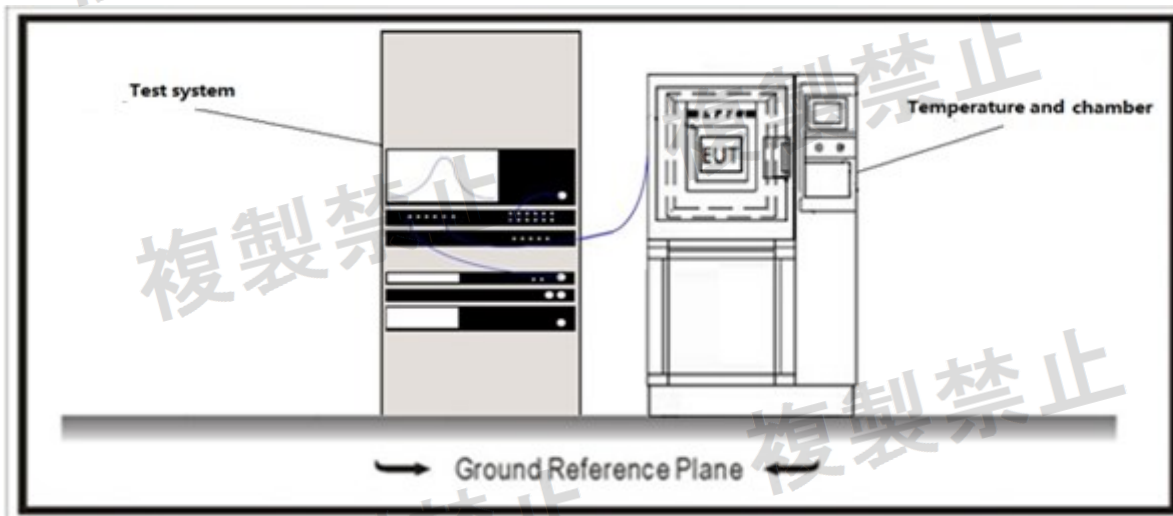

4.4.3 Test Procedure

References Rule

☒ MIC Notification 88 Annex 43

Step 1

Center frequency: Equal to center frequency of signal under test

RBW:1 MHz ; VBW : 1 MHz ; Span: 0 MHz

Detector Positive Peak ; Trace Max Hold

The transmitter output (antenna port) was connected to the spectrum analyzer.

Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.

Use a video trigger with the trigger level set to enable triggering only on full pulses.

Sweep Time is more than once pulse time.

Set the center frequency on any frequency would be measure and set the frequency span to zero span.

4.5 Transmitter Spurious Emission**VERDICT: PASS****4.5.1 Limit****Standard**


Article 2 Paragraph 1 item 19

<= 2.5uW/MHz for 30 - 2387 MHz

<= 25uW/MHz for 2387 - 2400 MHz

<= 25uW/MHz for 2483.5 - 2496.5 MHz

<= 2.5uW/MHz for 2496.5 - 12500 MHz

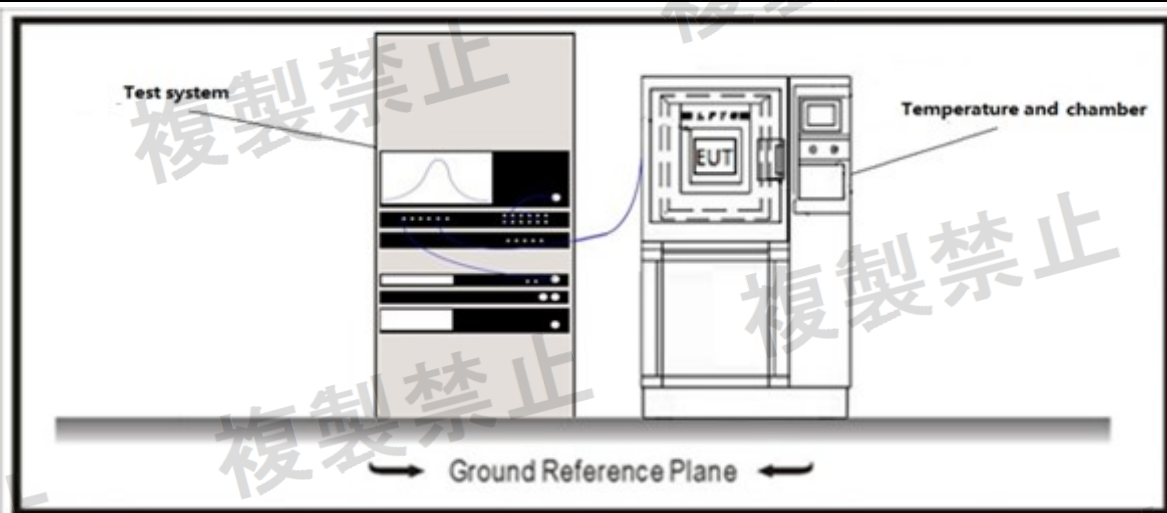4.5.2 Test Setup**4.5.3 Test Procedure**

References Rule

☒ MIC Notification 88 Annex 43

Step 1

1. Set the spectrum analyzer as follows when searching.

Sweep frequency width 30MHz to 5 times the carrier frequency

Resolution bandwidth 100 kHz for frequencies below 1 GHz, 1 MHz for frequencies above 1 GHz

Video bandwidth Same as resolution bandwidth

Sweep time Minimum time for guaranteed measurement accuracy

Sweep mode Single sweep

Detection mode positive peak

2. Set the spectrum analyzer for secondary emission measurement as follows.


Center frequency	Secondary emission frequency
Sweep frequency width	0Hz
Resolution bandwidth	100 kHz for frequencies below 1 GHz, 1 MHz for frequencies above 1 GHz
Video bandwidth	Same as resolution bandwidth
Sweep time	Minimum time for guaranteed measurement accuracy
Sweep mode	Single sweep
Detection mode	sample

4.6 Receiver Spurious Emission**VERDICT: PASS****4.6.1 Limit****Standard**

Article 2 Paragraph 1 item 19

<= 4nW for 30 - 1000 MHz

<= 20nW for 1000 - 12500MHz

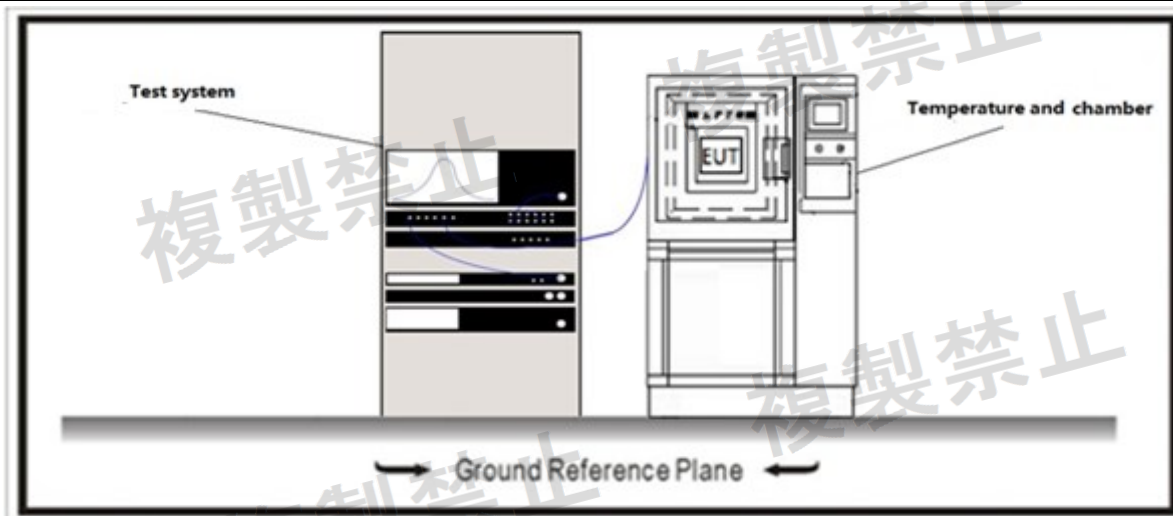4.6.2 Test Setup**4.6.3 Test Procedure**

References Rule

☒ MIC Notification 88 Annex 43

Step 1

1. Set the spectrum analyzer as follows when searching.

Sweep frequency width 30MHz to 5 times the carrier frequency

Resolution bandwidth 100 kHz for frequencies below 1 GHz, 1 MHz for frequencies above 1 GHz

Video bandwidth Same as resolution bandwidth

Sweep time Minimum time for guaranteed measurement accuracy

Sweep mode Single sweep

Detection mode positive peak

2. Set the spectrum analyzer for secondary emission measurement as follows.

Center frequency Secondary emission frequency

Sweep frequency width	0Hz
Resolution bandwidth	100 kHz for frequencies below 1 GHz, 1 MHz for frequencies above 1 GHz
Video bandwidth	Same as resolution bandwidth
Sweep time	Minimum time for guaranteed measurement accuracy
Sweep mode	Single sweep
Detection mode	sample

4.7 Interference Prevention Function Measurement

VERDICT: PASS


4.7.1 Limit

Standard

Article 2 Paragraph 1 of item 19

The one automatically to transmit and to receive identification code with the wireless equipment of the wireless station used in the same premises.

4.7.2 Test Setup

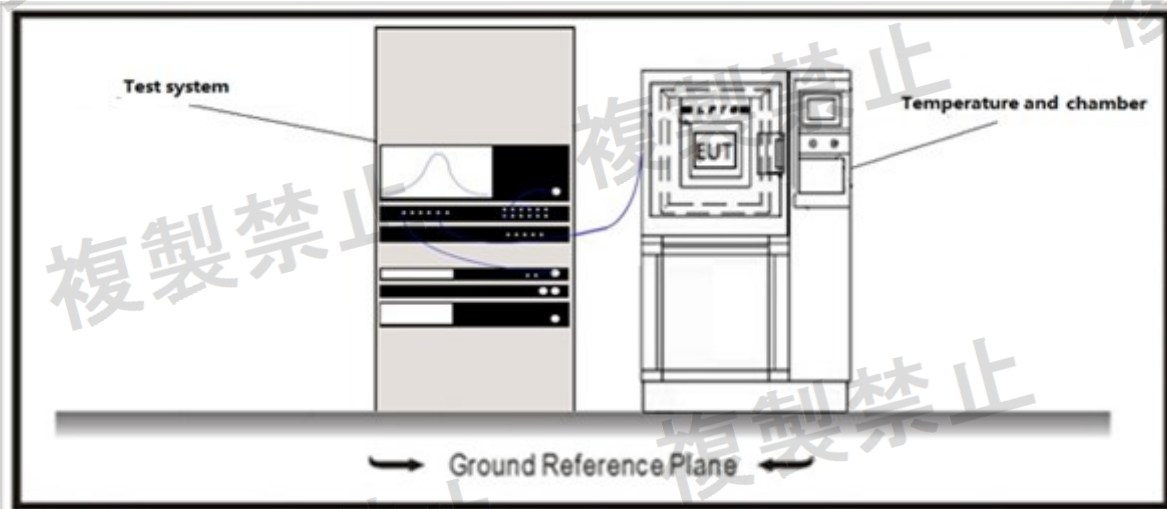

4.7.3 Test Procedure

References Rule

☒ Notification No. 88 Annex 43.

Step 1

1. Establish communication between EUT and auxiliary equipment, auxiliary must have an ability to parse and display the identifier code.
2. When the test equipment has the function of automatically transmitting the identification code.
 - A. The test equipment sends the identification code specified in the equipment rules.
 - B. Check the identification code sent by the demodulator.
3. When the test equipment has the function of automatically receiving the identification code.
 - A. The opposite device transmits the identification code specified in the device rules.
 - B. Verify that a dedicated fixture is used to communicate with the test equipment.
 - C. Send a code from the counter that differs from the identification code specified in the equipment rules.
 - D. Verify that the test equipment stops transmitting or displays a different ID.
4. If the encoding specified in the device rules is the same as the demodulated encoding, recorded as "Good", otherwise record as "No".

5 Conforming the structure that is difficult to open

The Radio Equipment:	
☐	Use Special Screw
☒	Metal Shielding is Soldered
☐	Use Ball Grid Array (BGA)
☒	RF module/Chip Pins > 20
☒	RF module/Chip Pins distance < 1.5 mm

The high-frequency section and modulation section (except for the antenna system) are not capable of being opened easily.

6 SETUP PHOTO AND EUT PHOTO

Remark: The test setup photo and EUT Photo please see appendix.

7 TEST RESULT

APPENDIX A: ANTENNA POWER ANTENNA POWER TOLERANCE AND E.I.R.P

Output Power And E.I.R.P


Mode		Frequency (MHz)	Output Power			EIRP (dBm/MHz)	Limit		Pass/Fail
			(dBm)	(mW/MHz)	(dBm/MHz)		Output Power (mW/MHz)	EIRP (dBm/MHz)	
FHSS	DH5	2402~2480	10.52	0.205	-6.891	-9.491	3.00	6.91	Pass
	2DH5	2402~2480	8.37	0.125	-9.034	-11.634	3.00	6.91	Pass
	3DH5	2402~2480	8.39	0.126	-9.008	-11.608	3.00	6.91	Pass
AFH	DH5	2402~2421	10.49	0.799	-0.973	-3.573	3.00	6.91	Pass
	2DH5	2402~2421	8.32	0.483	-3.158	-5.758	3.00	6.91	Pass
	3DH5	2402~2421	8.33	0.485	-3.147	-5.747	3.00	6.91	Pass


Output Power Tolerance

Mode		Frequency (MHz)	Declared Power	Output Power	Tolerance (%)	Limit	Pass/Fail
			(mW/MHz)	(mW/MHz)		Tolerance (%)	
FHSS	DH5	2402~2480	1	0.205	-79.50%	+20	Pass
	2DH5	2402~2480	1	0.125	-87.50%	+20	Pass
	3DH5	2402~2480	1	0.126	-87.40%	+20	Pass
AFH	DH5	2402~2421	1	0.799	-20.10%	+20	Pass
	2DH5	2402~2421	1	0.483	-51.70%	+20	Pass
	3DH5	2402~2421	1	0.485	-51.50%	+20	Pass


APPENDIX B: OCCUPIED BANDWIDTH

Test Condition	Test Mode	Antenna	Frequency[MHz]	Result [MHz]	Limit [MHz]	Verdict
NTNV	DH5	Ant1	Hop	78.813	≤83.5	PASS
NTNV	2DH5	Ant1	Hop	78.928	≤83.5	PASS
NTNV	3DH5	Ant1	Hop	78.909	≤83.5	PASS

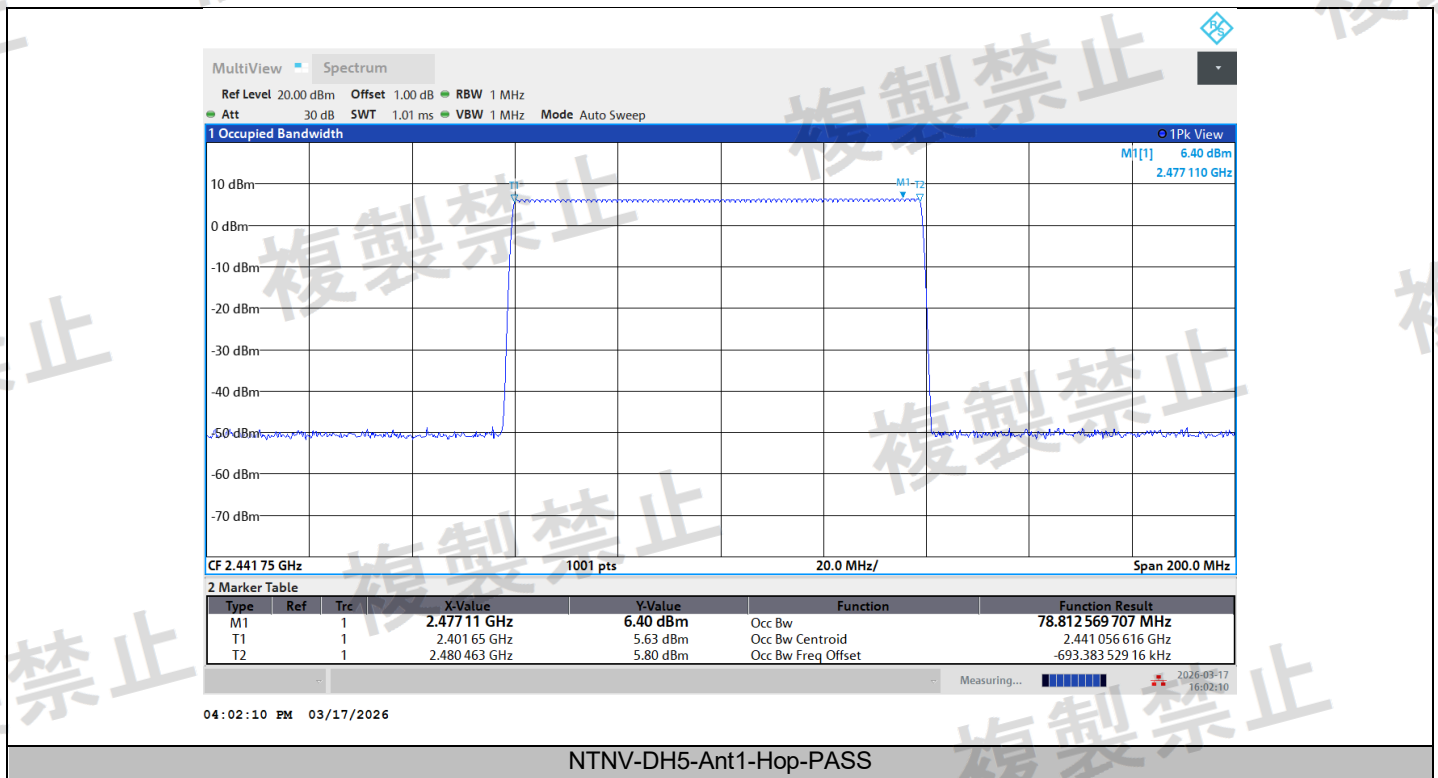

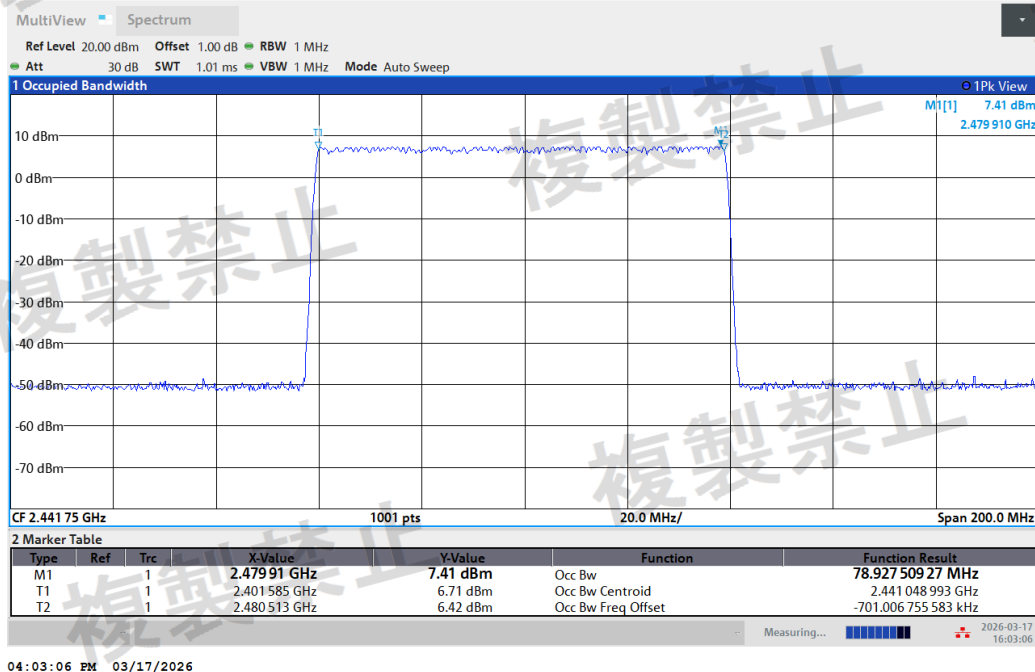

NTNV-2DH5-Ant1-Hop-PASS

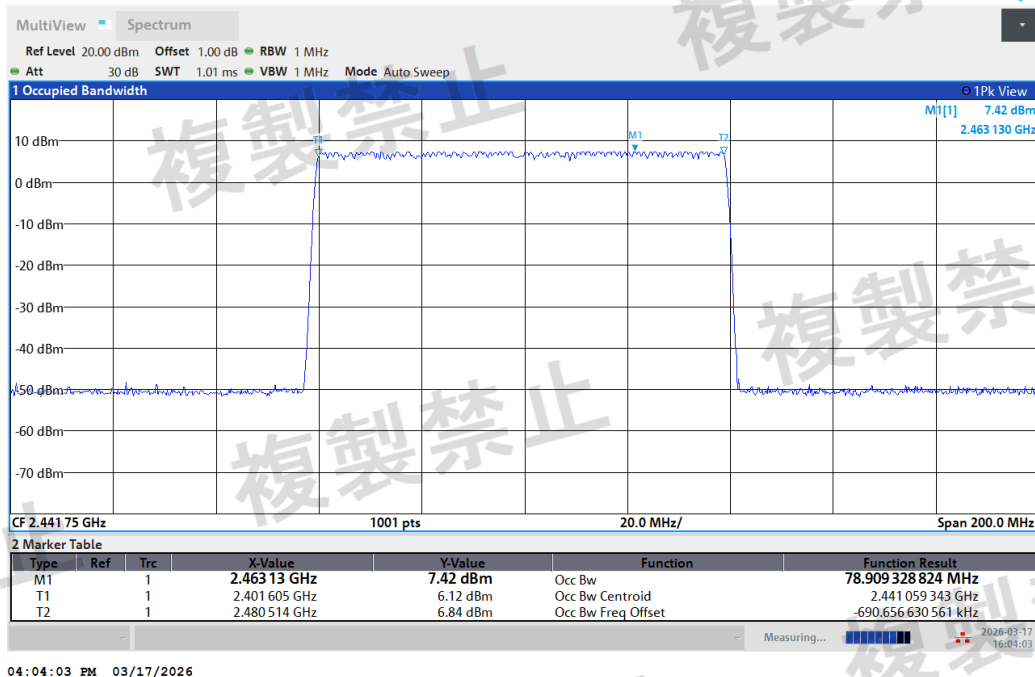



NTNV-3DH5-Ant1-Hop-PASS

APPENDIX C: FREQUENCY TOLERANCE


Test Condition	Test Mode	Antenna	Frequency[MHz]	CenterFreq [MHz]	Result[ppm]	Limit[ppm]	Verdict
NTLV	DH5	Ant1	2402	2401.991	-3.74688	±50	PASS
NTHV	DH5	Ant1	2402	2401.994	-2.49792	±50	PASS
NTNV	DH5	Ant1	2402	2401.991	-3.74688	±50	PASS
NTLV	DH5	Ant1	2441	2440.991	-3.68701	±50	PASS
NTHV	DH5	Ant1	2441	2440.991	-3.68701	±50	PASS
NTNV	DH5	Ant1	2441	2440.9955	-1.84351	±50	PASS
NTLV	DH5	Ant1	2480	2479.9925	-3.02419	±50	PASS
NTHV	DH5	Ant1	2480	2479.9925	-3.02419	±50	PASS
NTNV	DH5	Ant1	2480	2479.991	-3.62903	±50	PASS
NTLV	2DH5	Ant1	2402	2401.9955	-1.87344	±50	PASS
NTHV	2DH5	Ant1	2402	2401.997	-1.24896	±50	PASS
NTNV	2DH5	Ant1	2402	2401.997	-1.24896	±50	PASS
NTNV	2DH5	Ant1	2441	2440.9985	-0.61450	±50	PASS
NTNV	2DH5	Ant1	2480	2479.997	-1.20968	±50	PASS
NTNV	3DH5	Ant1	2402	2401.9955	-1.87344	±50	PASS
NTNV	3DH5	Ant1	2441	2440.9955	-1.84351	±50	PASS
NTNV	3DH5	Ant1	2480	2479.9955	-1.81452	±50	PASS

Note: Result[ppm]= (CenterFreq - Channel)/Channel*1000000

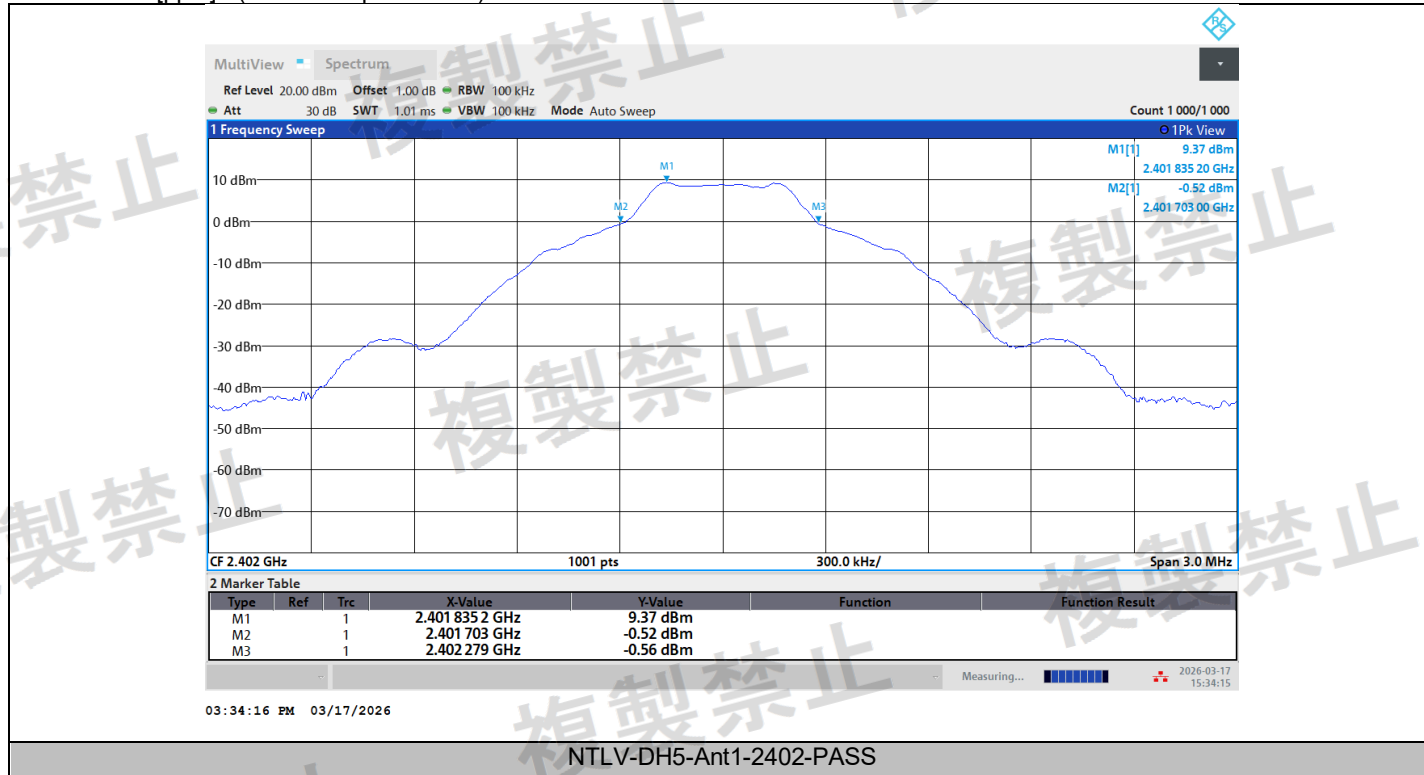


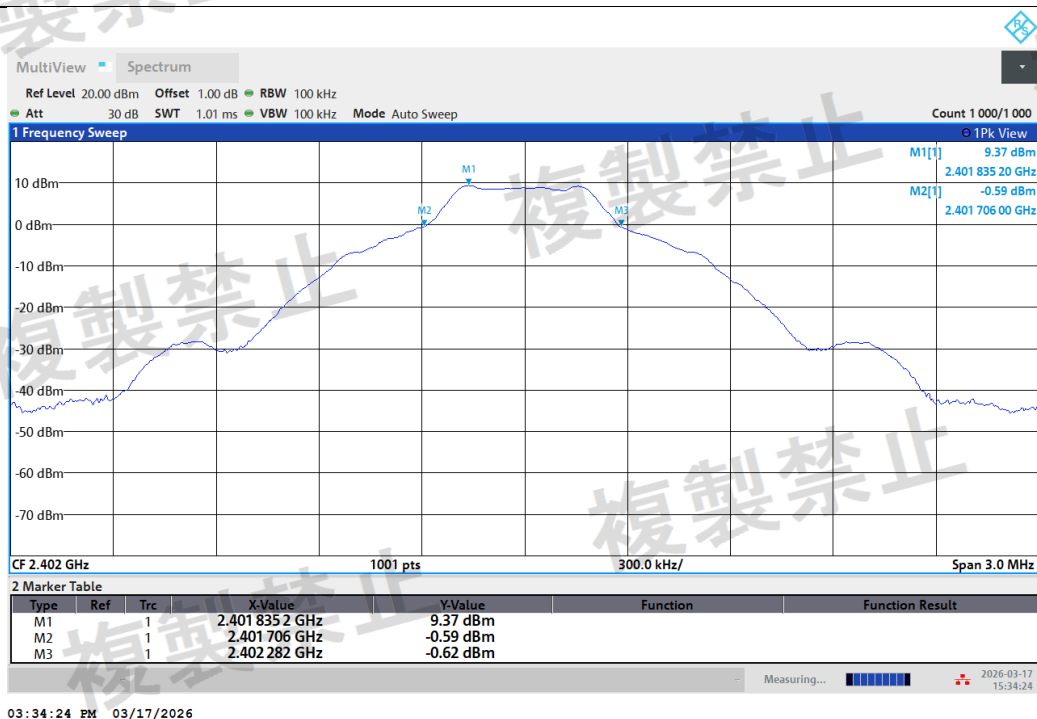


NTHV-DH5-Ant1-2402-PASS

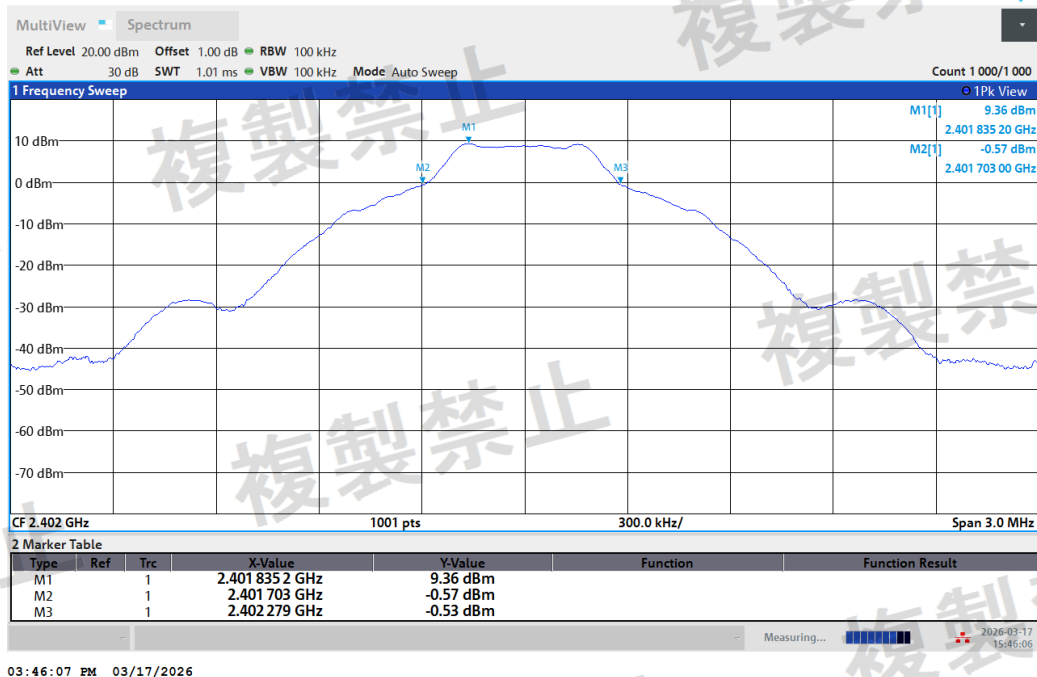


NTNV-DH5-Ant1-2402-PASS

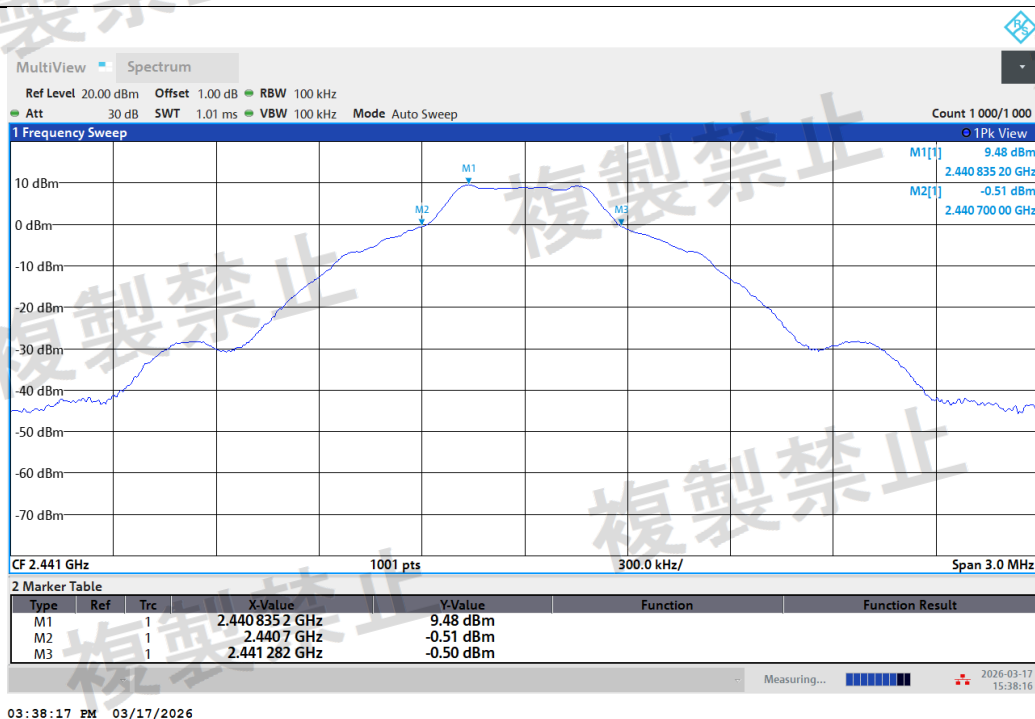


NTLV-DH5-Ant1-2441-PASS

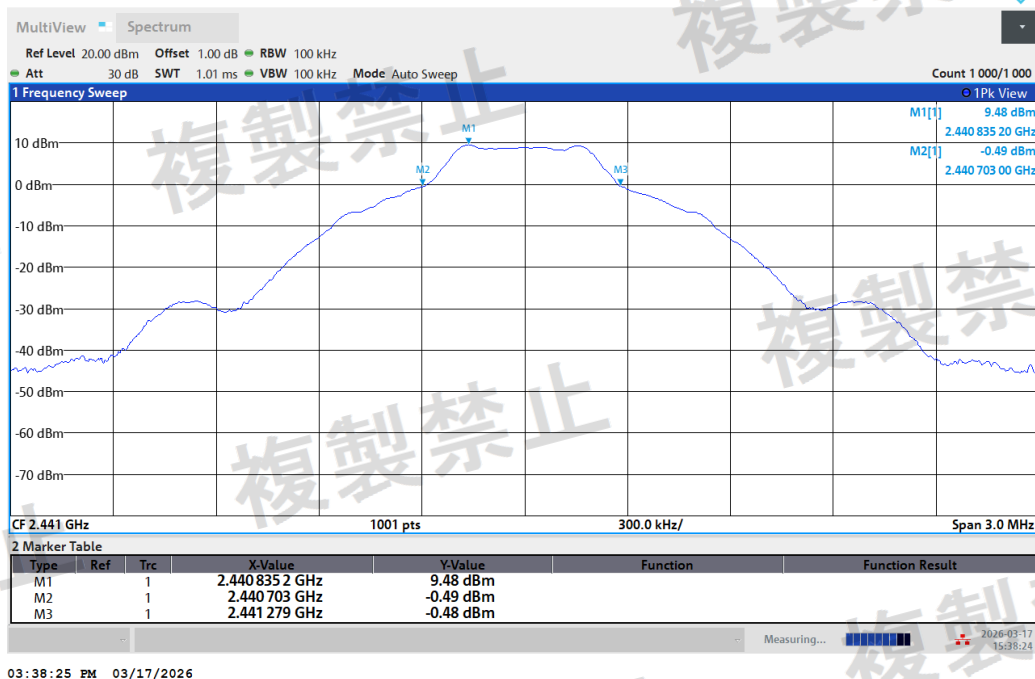


NTHV-DH5-Ant1-2441-PASS

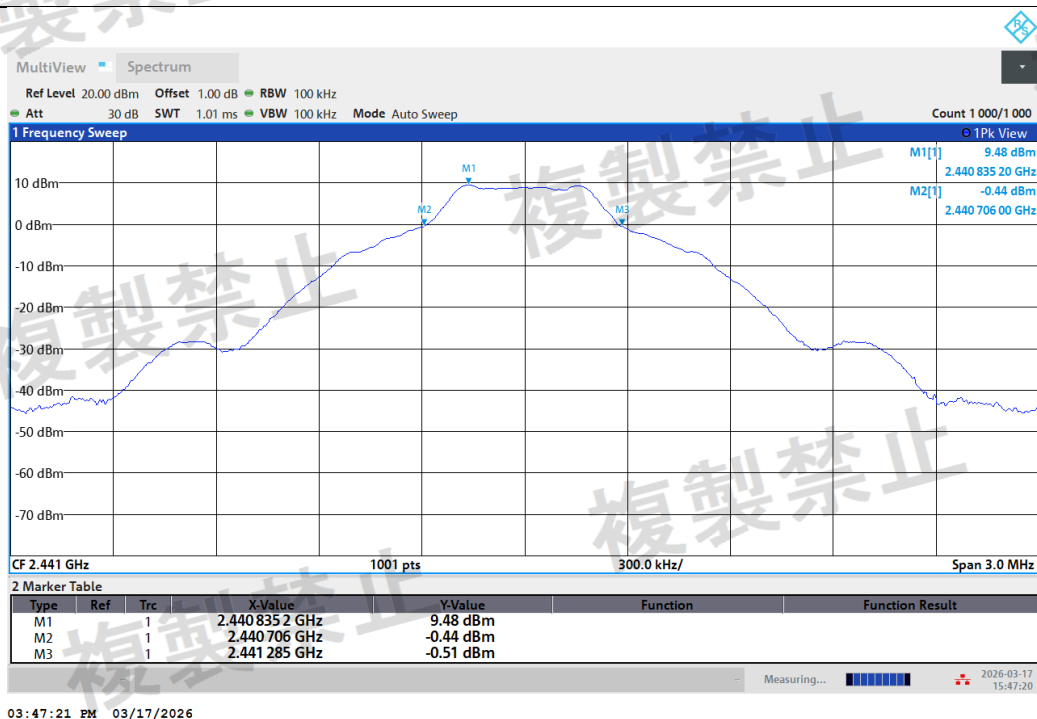


NTNV-DH5-Ant1-2441-PASS

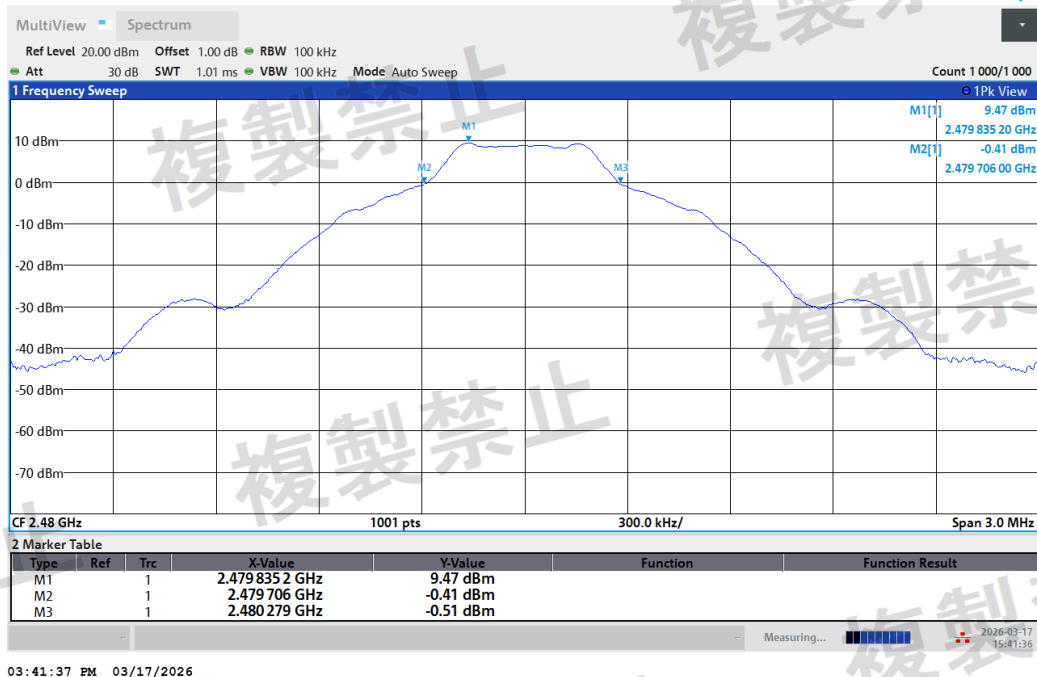


NTLV-DH5-Ant1-2480-PASS

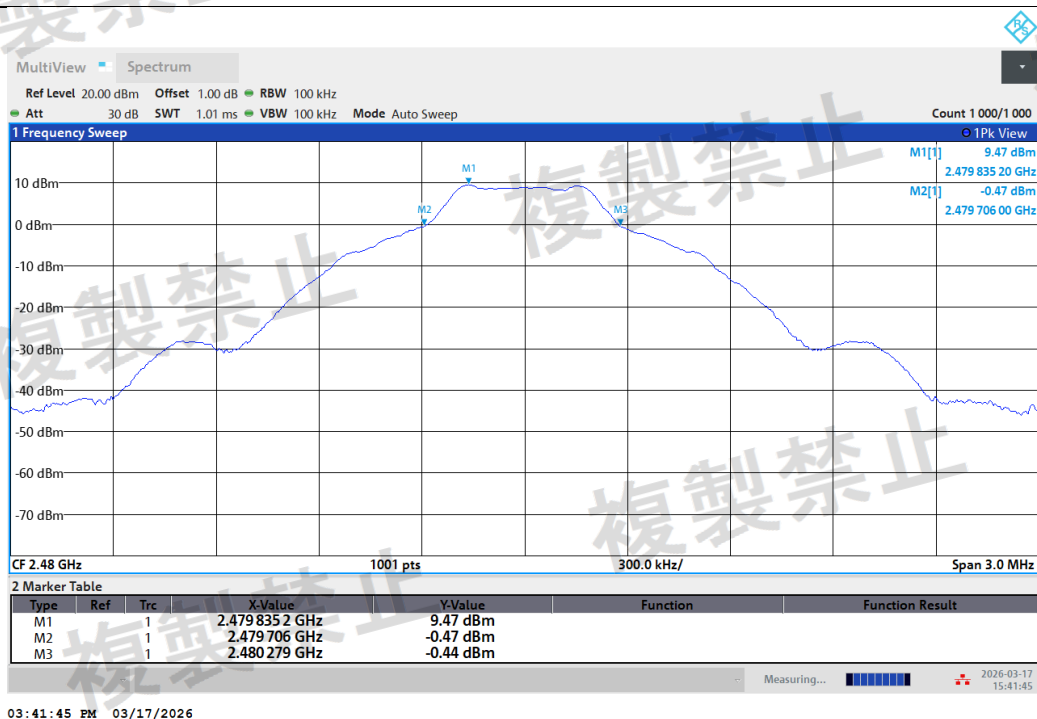


NTHV-DH5-Ant1-2480-PASS

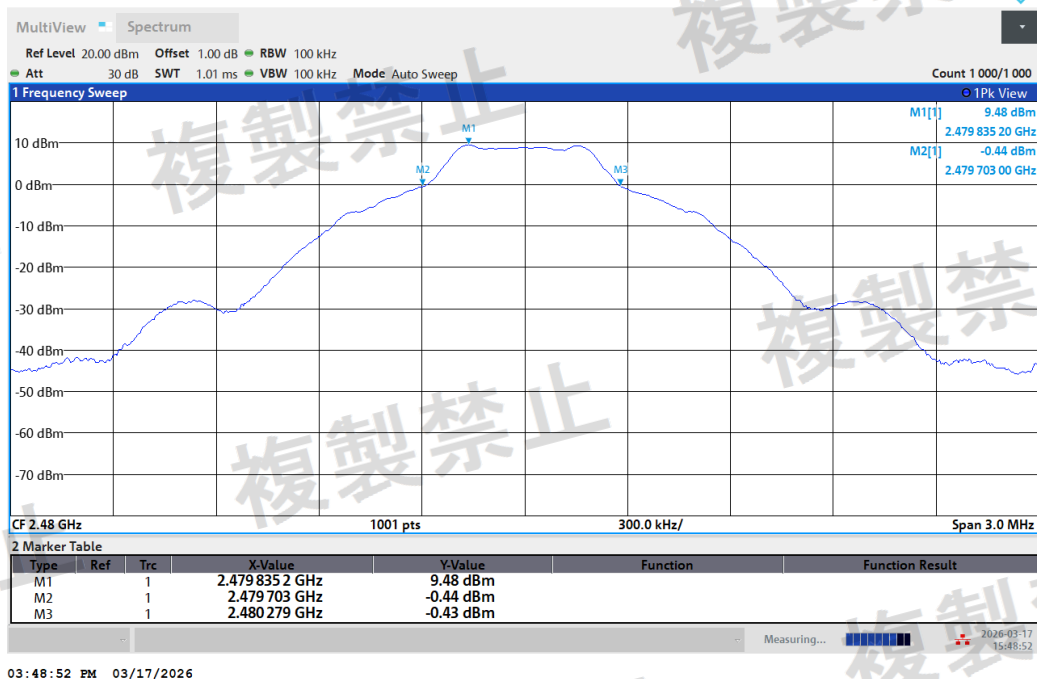


NTNV-DH5-Ant1-2480-PASS

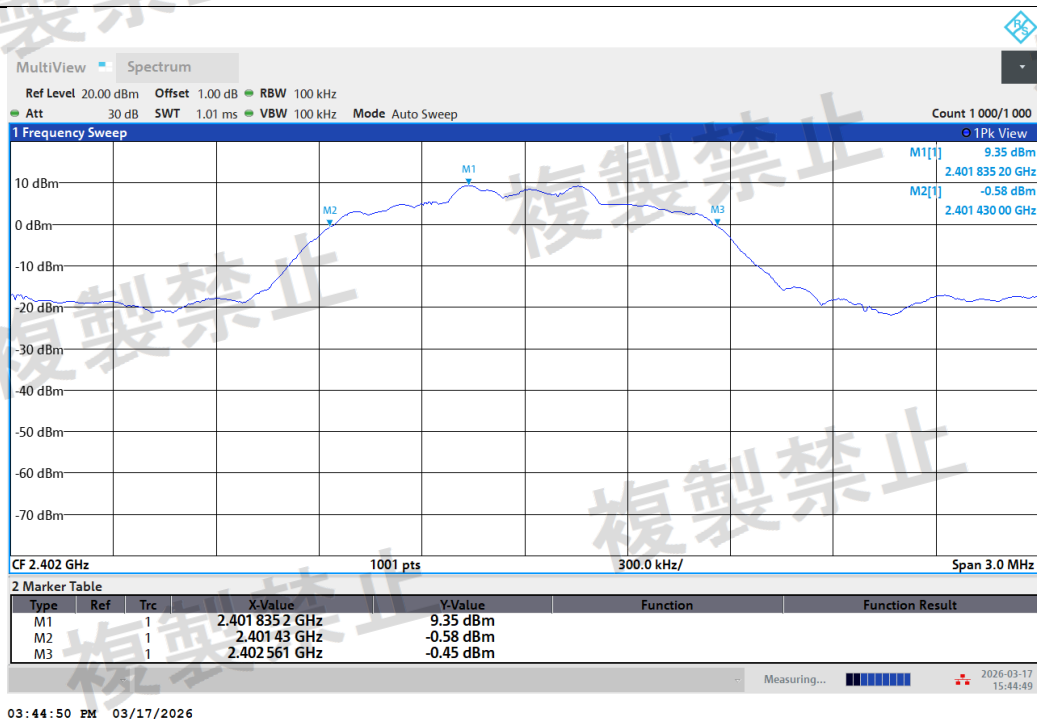


NTLV-2DH5-Ant1-2402-PASS

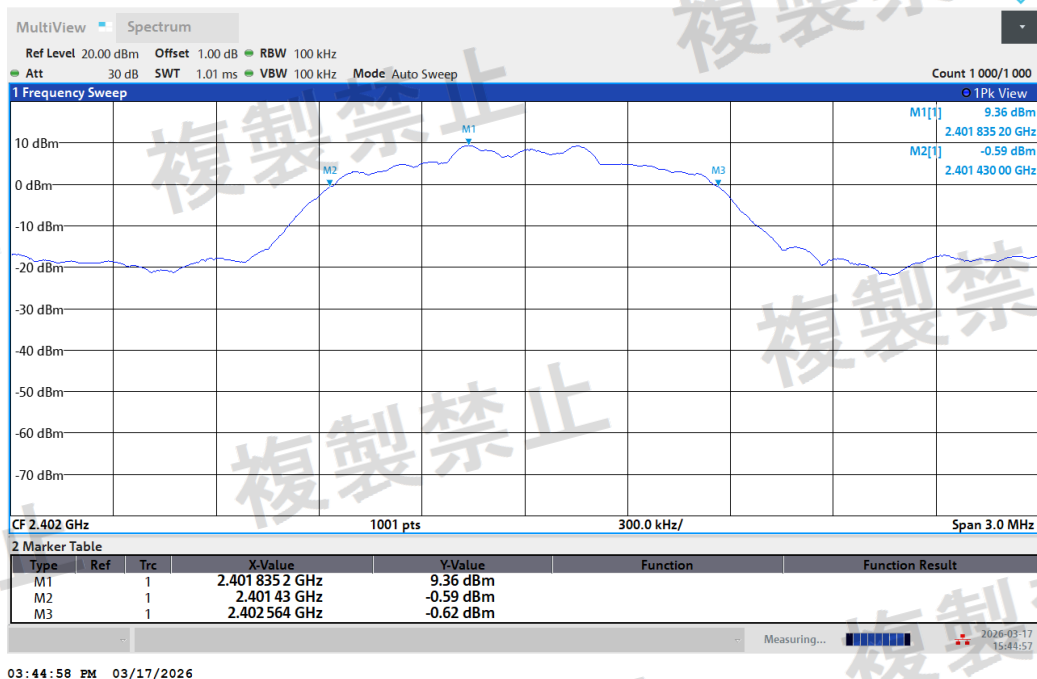


NTHV-2DH5-Ant1-2402-PASS

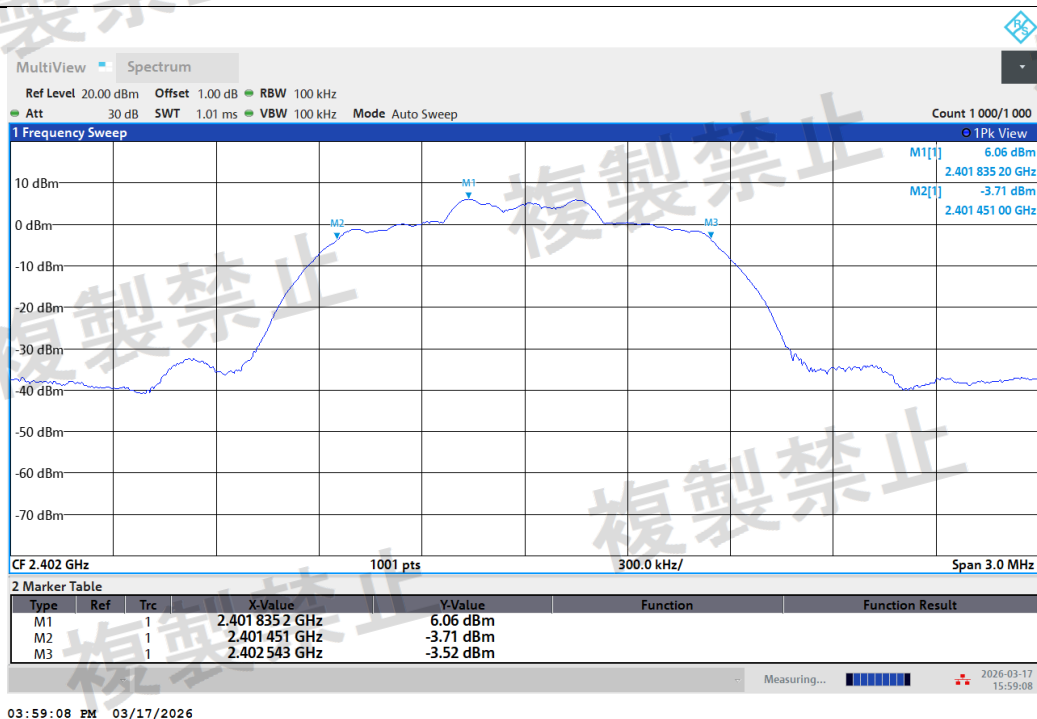


NTNV-2DH5-Ant1-2402-PASS

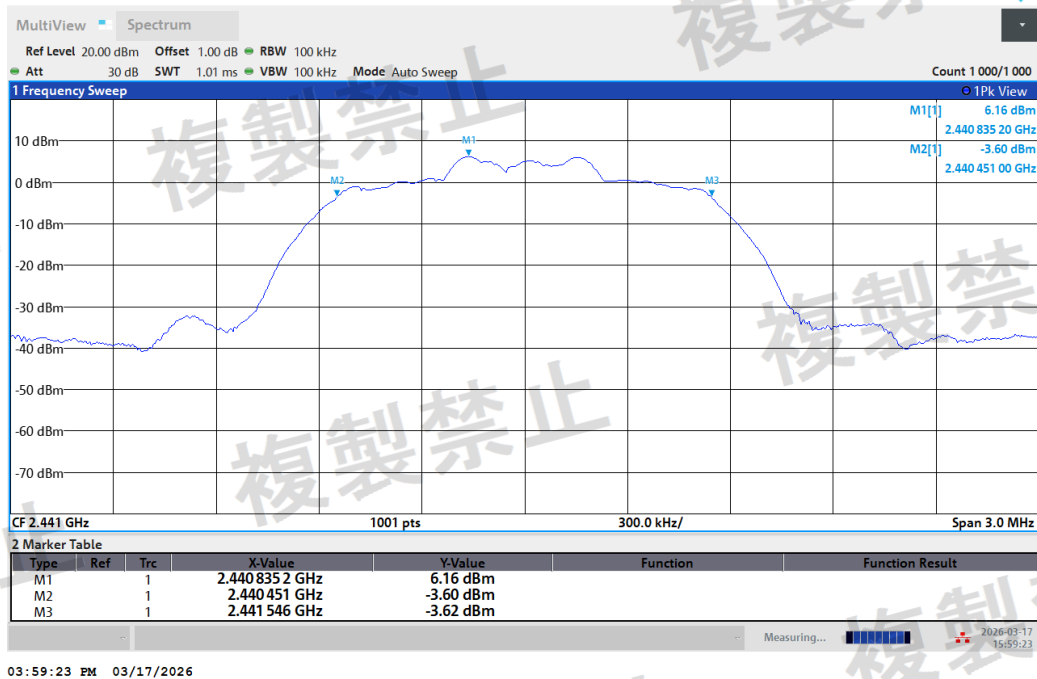


NTNV-2DH5-Ant1-2441-PASS

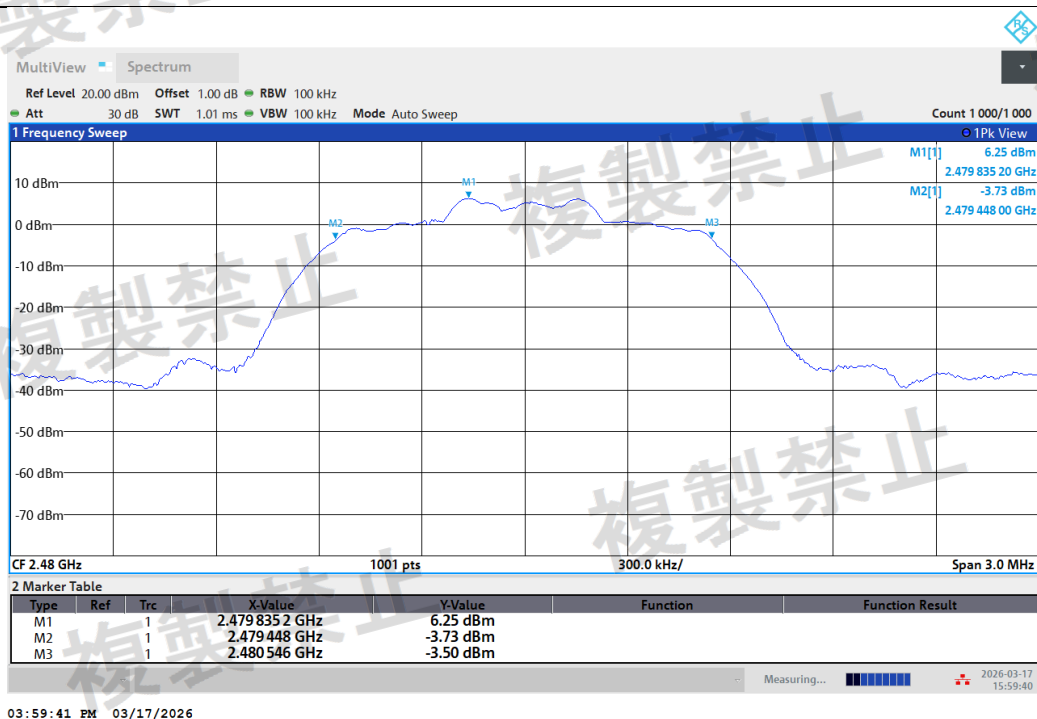


NTNV-2DH5-Ant1-2480-PASS

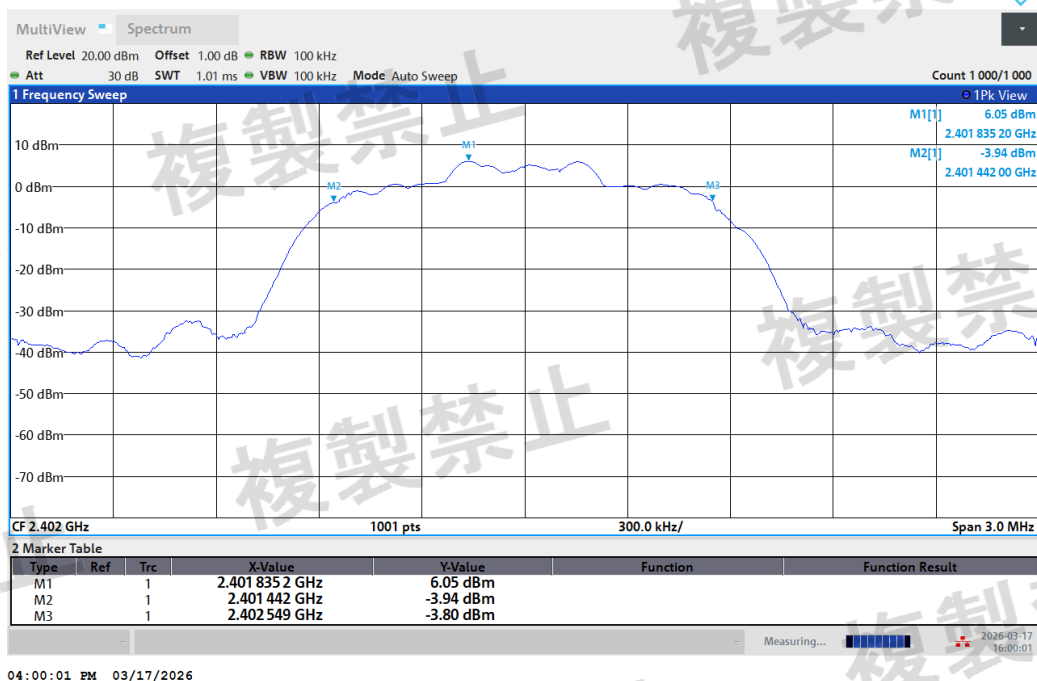

NTNV-3DH5-Ant1-2402-PASS

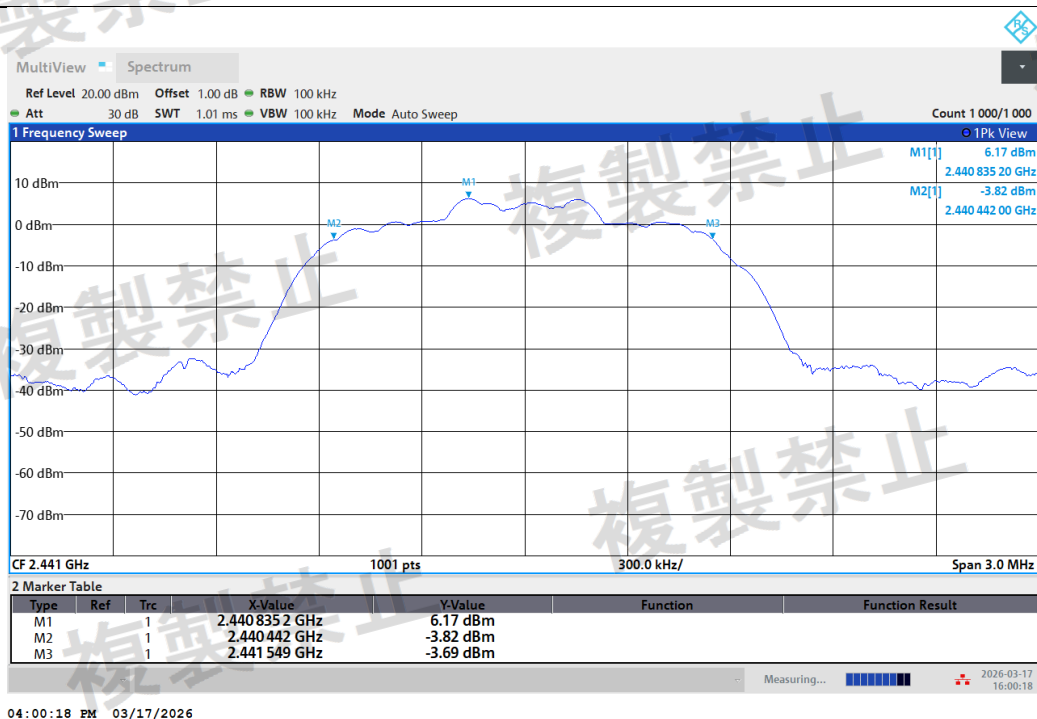

NTNV-3DH5-Ant1-2441-PASS

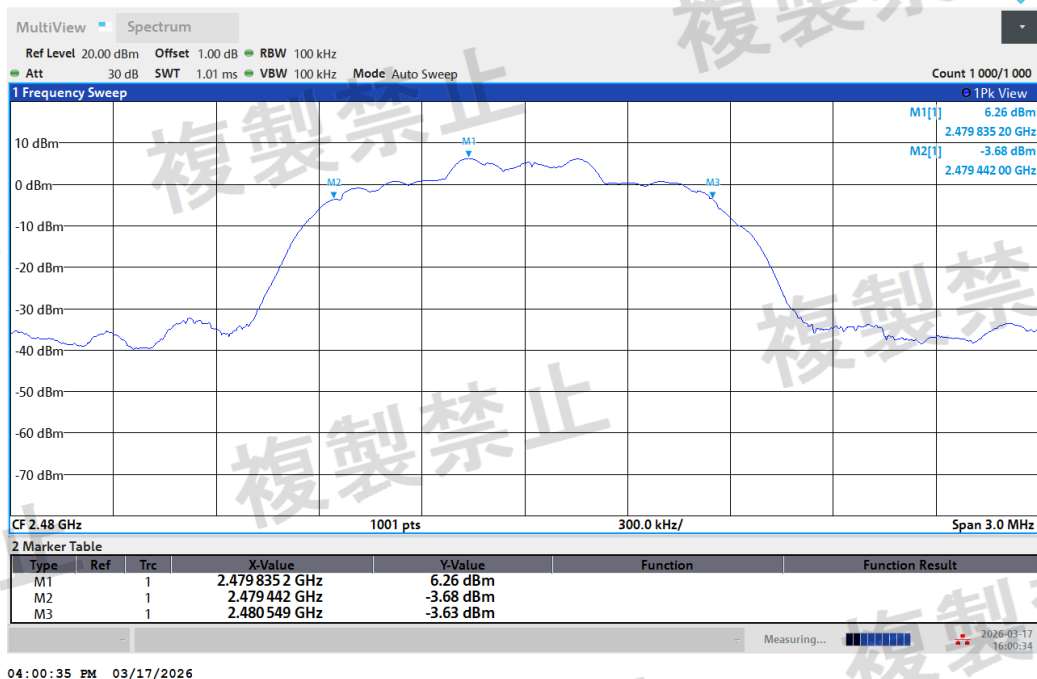

NTNV-3DH5-Ant1-2480-PASS


APPENDIX D: DWELL TIME

Test Condition	Test Mode	Frequency [MHz]	spread bandwidth [MHz]	BurstWidth [ms]	Burst Number	Test observation time [s]	Total observation time [s]	Result[s]	Limit [s]	Verdict
BR/EDR NTNV	DH5	2441	71.663	2.88	10	3	28.7008	0.2752	≤0.4	PASS
	2DH5	2441	71.541	2.88	10	3	28.5536	0.2747	≤0.4	PASS
	3DH5	2441	71.899	2.88	10	3	28.4848	0.2761	≤0.4	PASS
AFH NTNV	DH5	2411	18.213	2.88	6	3	7.2588	0.0420	≤0.4	PASS
	2DH5	2411	18.451	2.88	7	3	7.4016	0.0496	≤0.4	PASS
	3DH5	2411	18.467	2.88	6	3	7.4012	0.0425	≤0.4	PASS

Note1: Result = Burst Width * (Total observation time / Test observation time) * Burst Number



Note2: Total observation time = Spread Bandwidth * 0.4s

Note3: The image reflects worse data.


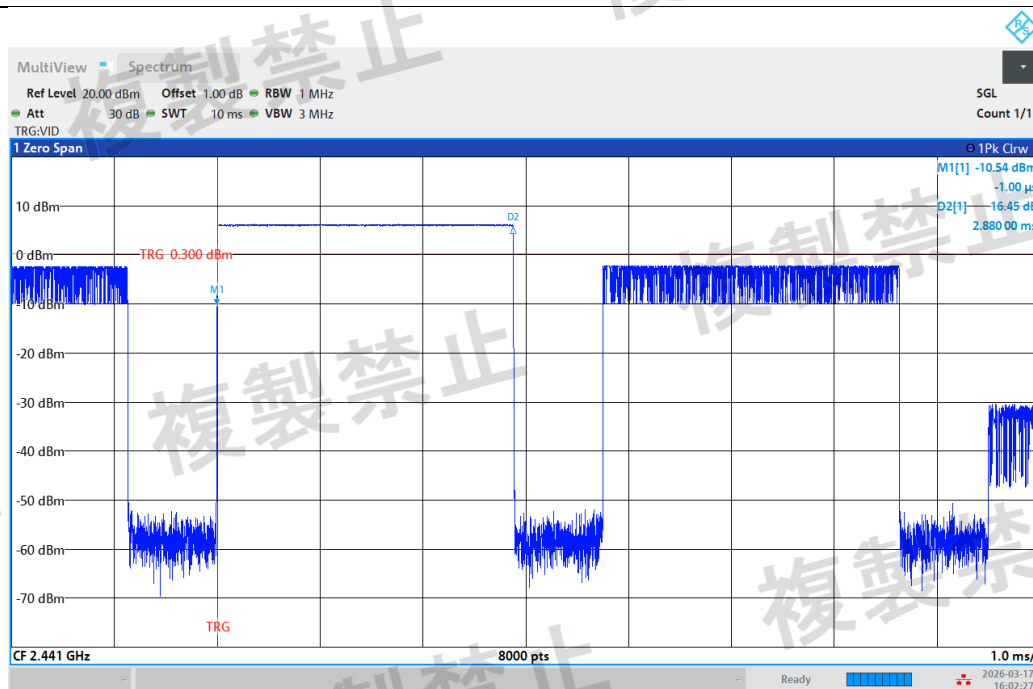


04:02:27 PM 03/17/2026


NTNV-DH5-Ant1-Hop-PASS

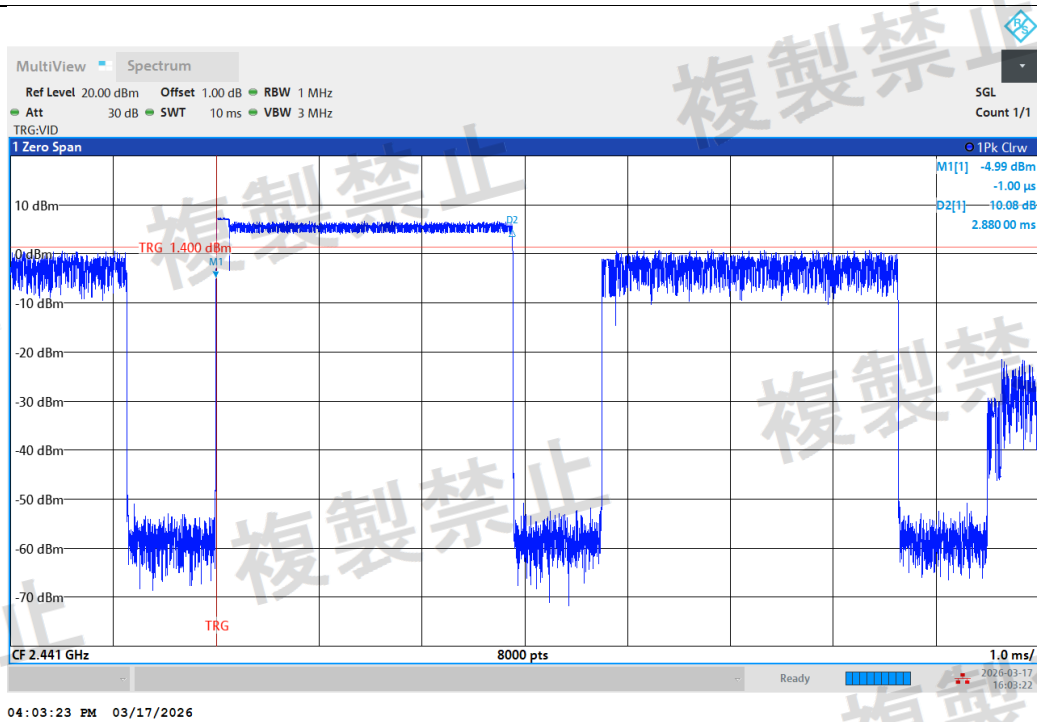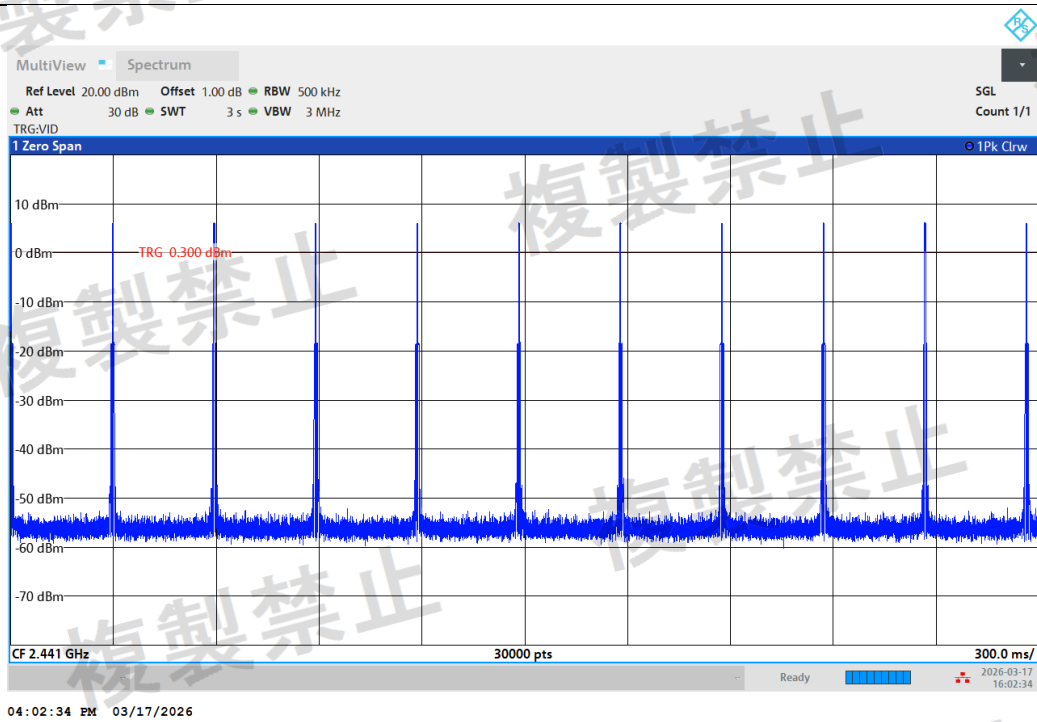

NTNV-2DH5-Ant1-Hop-PASS

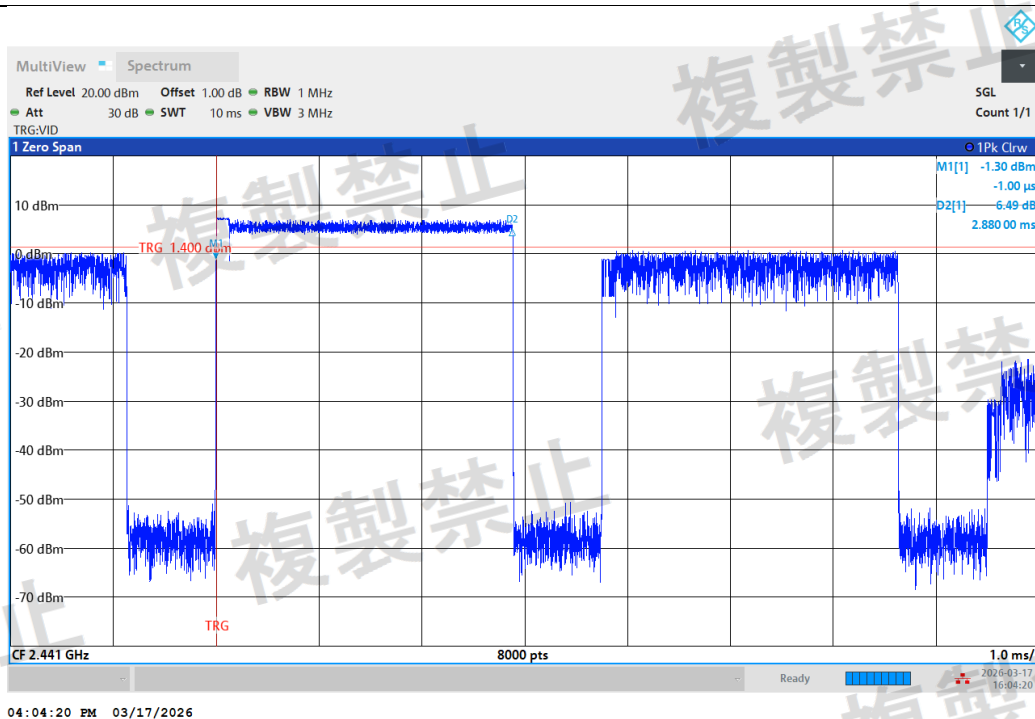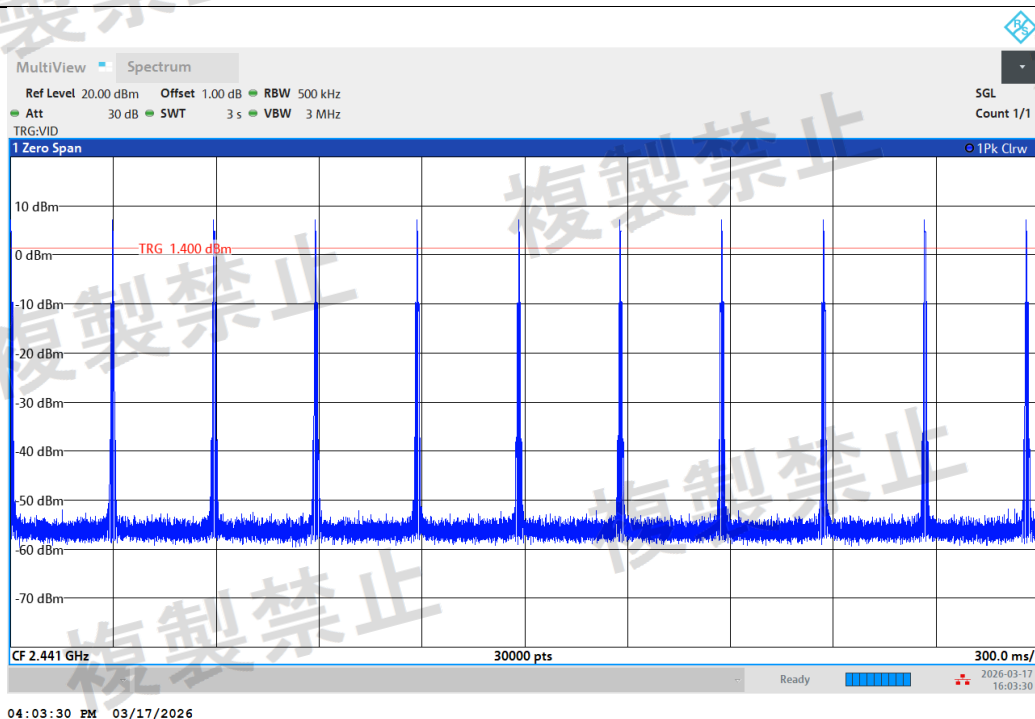

NTNV-3DH5-Ant1-Hop-PASS

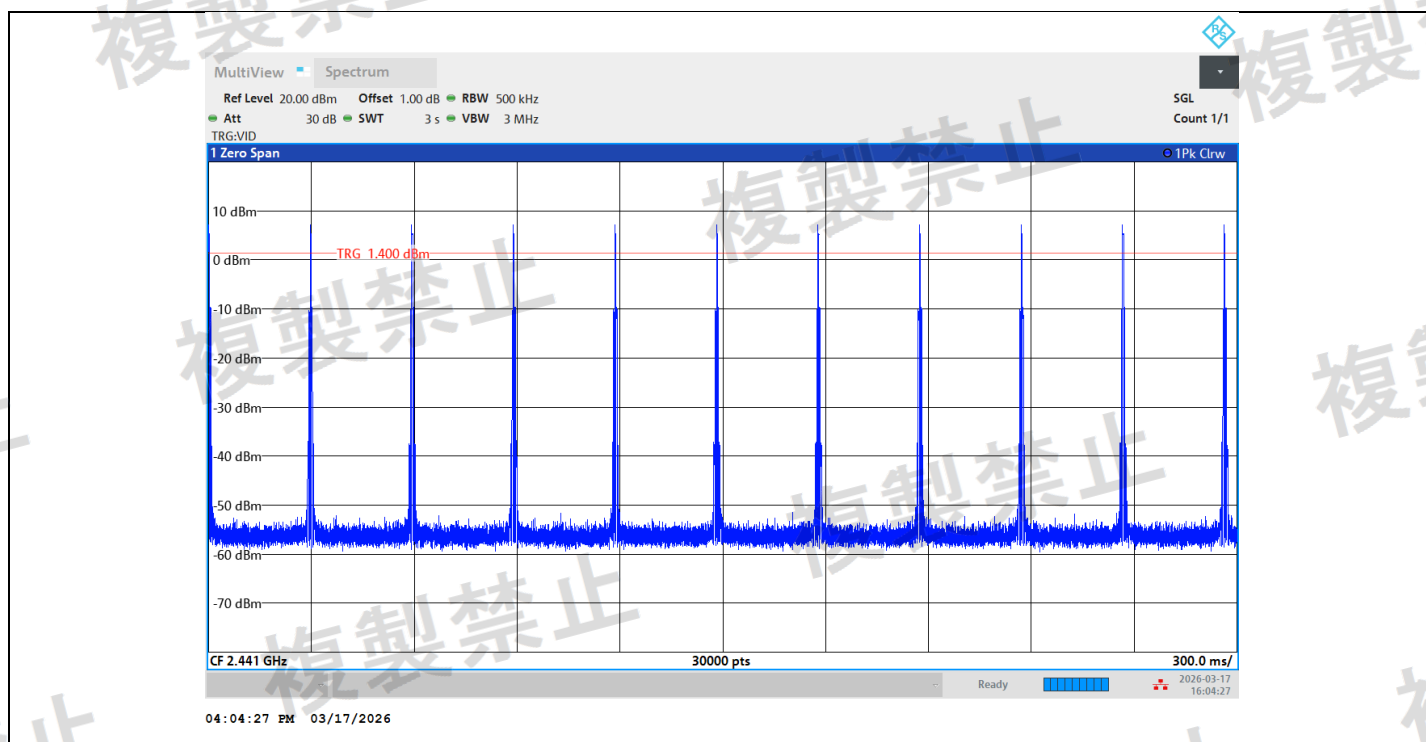

APPENDIX E: TRANSMITTER SPURIOUS EMISSIONS

Test Result


Test Condition	Test Mode	Antenna	Frequency [MHz]	Freq. Range [MHz]	Freq. [MHz]	Result [dBm/MHz]	Limit [dBm/MHz]	Result [μW/MHz]	Limit [μW/MHz]	Verdict
NTNV	DH5	Ant1	2402	30~1000	46.25	-59.28	≤-26	0.00118	≤2.5	PASS
NTNV	DH5	Ant1	2402	1000~2387	2262.86	-52.81	≤-26	0.00524	≤2.5	PASS
NTNV	DH5	Ant1	2402	2387~2400	2400.00	-26.52	≤-16	2.22844	≤25	PASS
NTNV	DH5	Ant1	2402	2483.5~2496.5	2483.74	-54.28	≤-16	0.00373	≤25	PASS
NTNV	DH5	Ant1	2402	2496.5~13000	5739.46	-50.46	≤-26	0.00899	≤2.5	PASS
NTNV	DH5	Ant1	2441	30~1000	56.92	-58.66	≤-26	0.00136	≤2.5	PASS
NTNV	DH5	Ant1	2441	1000~2387	1925.13	-51.93	≤-26	0.00641	≤2.5	PASS
NTNV	DH5	Ant1	2441	2387~2400	2388.31	-54.71	≤-16	0.00338	≤25	PASS
NTNV	DH5	Ant1	2441	2483.5~2496.5	2495.67	-54.39	≤-16	0.00364	≤25	PASS
NTNV	DH5	Ant1	2441	2496.5~13000	5741.56	-50.47	≤-26	0.00897	≤2.5	PASS
NTNV	DH5	Ant1	2480	30~1000	53.04	-59.44	≤-26	0.00114	≤2.5	PASS
NTNV	DH5	Ant1	2480	1000~2387	1921.66	-46.24	≤-26	0.02377	≤2.5	PASS
NTNV	DH5	Ant1	2480	2387~2400	2388.46	-54.36	≤-16	0.00366	≤25	PASS
NTNV	DH5	Ant1	2480	2483.5~2496.5	2483.52	-50.17	≤-16	0.00962	≤25	PASS
NTNV	DH5	Ant1	2480	2496.5~13000	3505.89	-48.52	≤-26	0.01406	≤2.5	PASS
NTNV	2DH5	Ant1	2402	30~1000	183.50	-59.15	≤-26	0.00122	≤2.5	PASS
NTNV	2DH5	Ant1	2402	1000~2387	2338.46	-52.12	≤-26	0.00614	≤2.5	PASS
NTNV	2DH5	Ant1	2402	2387~2400	2399.99	-12.25	≤-16	59.5662 ₁	≤25	See table below
NTNV	2DH5	Ant1	2402	2483.5~2496.5	2487.08	-53.85	≤-16	0.00412	≤25	PASS
NTNV	2DH5	Ant1	2402	2496.5~13000	8409.97	-51.73	≤-26	0.00671	≤2.5	PASS
NTNV	2DH5	Ant1	2441	30~1000	50.13	-58.60	≤-26	0.00138	≤2.5	PASS
NTNV	2DH5	Ant1	2441	1000~2387	2377.29	-52.99	≤-26	0.00502	≤2.5	PASS
NTNV	2DH5	Ant1	2441	2387~2400	2387.20	-54.58	≤-16	0.00348	≤25	PASS
NTNV	2DH5	Ant1	2441	2483.5~2496.5	2496.27	-54.24	≤-16	0.00377	≤25	PASS
NTNV	2DH5	Ant1	2441	2496.5~13000	8508.70	-50.89	≤-26	0.00815	≤2.5	PASS
NTNV	2DH5	Ant1	2480	30~1000	36.31	-58.36	≤-26	0.00146	≤2.5	PASS
NTNV	2DH5	Ant1	2480	1000~2387	2162.65	-52.65	≤-26	0.00543	≤2.5	PASS
NTNV	2DH5	Ant1	2480	2387~2400	2391.08	-55.02	≤-16	0.00315	≤25	PASS
NTNV	2DH5	Ant1	2480	2483.5~2496.5	2483.51	-37.09	≤-16	0.19543	≤25	PASS
NTNV	2DH5	Ant1	2480	2496.5~13000	8512.90	-50.02	≤-26	0.00995	≤2.5	PASS
NTNV	3DH5	Ant1	2402	30~1000	73.41	-59.19	≤-26	0.00121	≤2.5	PASS
NTNV	3DH5	Ant1	2402	1000~2387	2284.36	-52.17	≤-26	0.00607	≤2.5	PASS
NTNV	3DH5	Ant1	2402	2387~2400	2399.99	-12.40	≤-16	57.5439 ₉	≤25	See table below
NTNV	3DH5	Ant1	2402	2483.5~2496.5	2484.89	-54.36	≤-16	0.00366	≤25	PASS
NTNV	3DH5	Ant1	2402	2496.5~13000	8445.16	-50.74	≤-26	0.00843	≤2.5	PASS
NTNV	3DH5	Ant1	2441	30~1000	39.94	-57.89	≤-26	0.00163	≤2.5	PASS
NTNV	3DH5	Ant1	2441	1000~2387	2377.64	-52.46	≤-26	0.00568	≤2.5	PASS
NTNV	3DH5	Ant1	2441	2387~2400	2390.68	-54.31	≤-16	0.00371	≤25	PASS


NTNV	3DH5	Ant1	2441	2483.5~2496.5	2490.49	-54.35	≤-16	0.00367	≤25	PASS
NTNV	3DH5	Ant1	2441	2496.5~13000	8741.36	-51.03	≤-26	0.00789	≤2.5	PASS
NTNV	3DH5	Ant1	2480	30~1000	40.91	-58.35	≤-26	0.00146	≤2.5	PASS
NTNV	3DH5	Ant1	2480	1000~2387	2365.50	-53.41	≤-26	0.00456	≤2.5	PASS
NTNV	3DH5	Ant1	2480	2387~2400	2391.11	-54.88	≤-16	0.00325	≤25	PASS
NTNV	3DH5	Ant1	2480	2483.5~2496.5	2484.10	-51.69	≤-16	0.00678	≤25	PASS
NTNV	3DH5	Ant1	2480	2496.5~13000	9823.74	-51.39	≤-26	0.00726	≤2.5	PASS

Test Result_Step2


Test Condition	Test Mode	Antenna	Frequency [MHz]	Freq. [MHz]	Result [dBm/MHz]	Limit [dBm/MHz]	Result [μW/MHz]	Limit [μW/MHz]	Verdict
NTNV	2DH5	Ant1	2402	2399.99	-23.16	≤-16	4.83059	≤25	PASS
NTNV	3DH5	Ant1	2402	2399.99	-23.36	≤-16	4.61318	≤25	PASS

Test Graphs

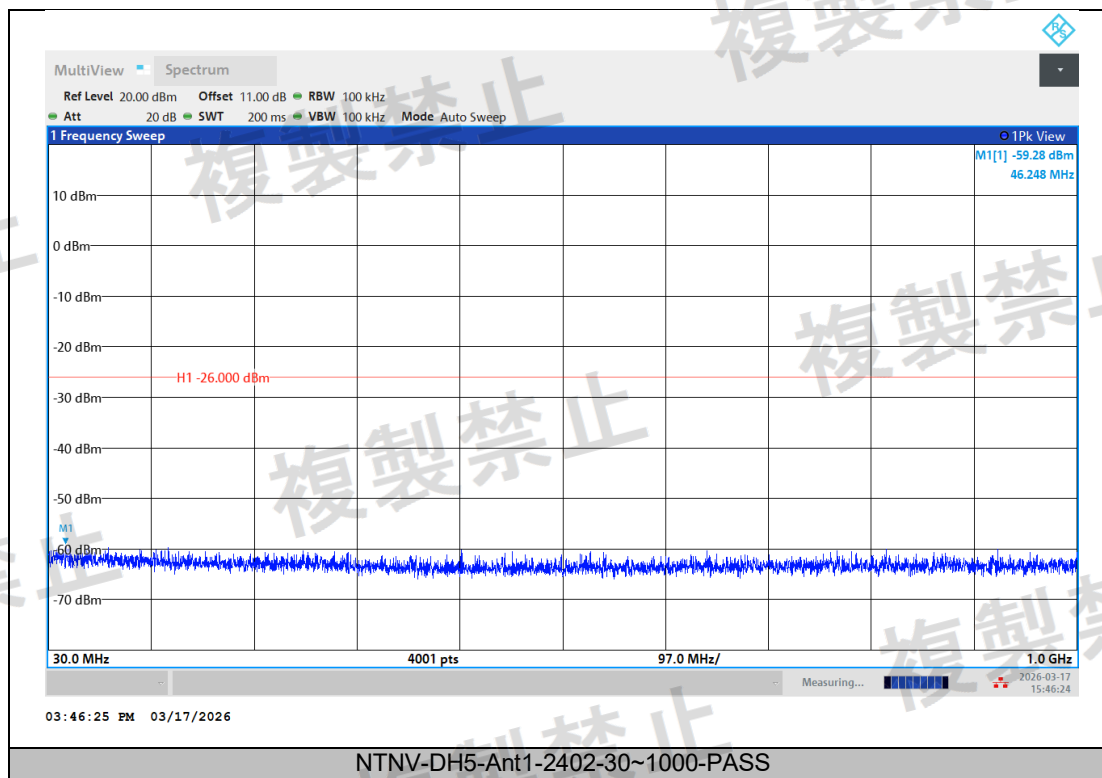


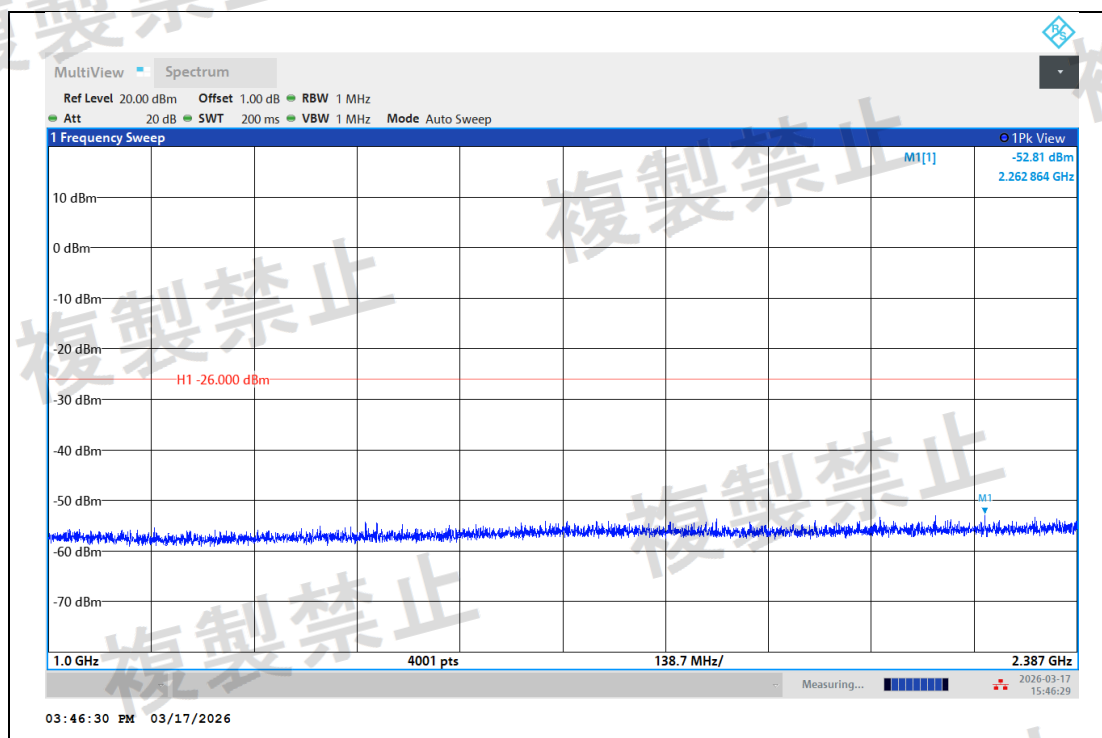


NTNV-DH5-Ant1-2402-1000~2387-PASS

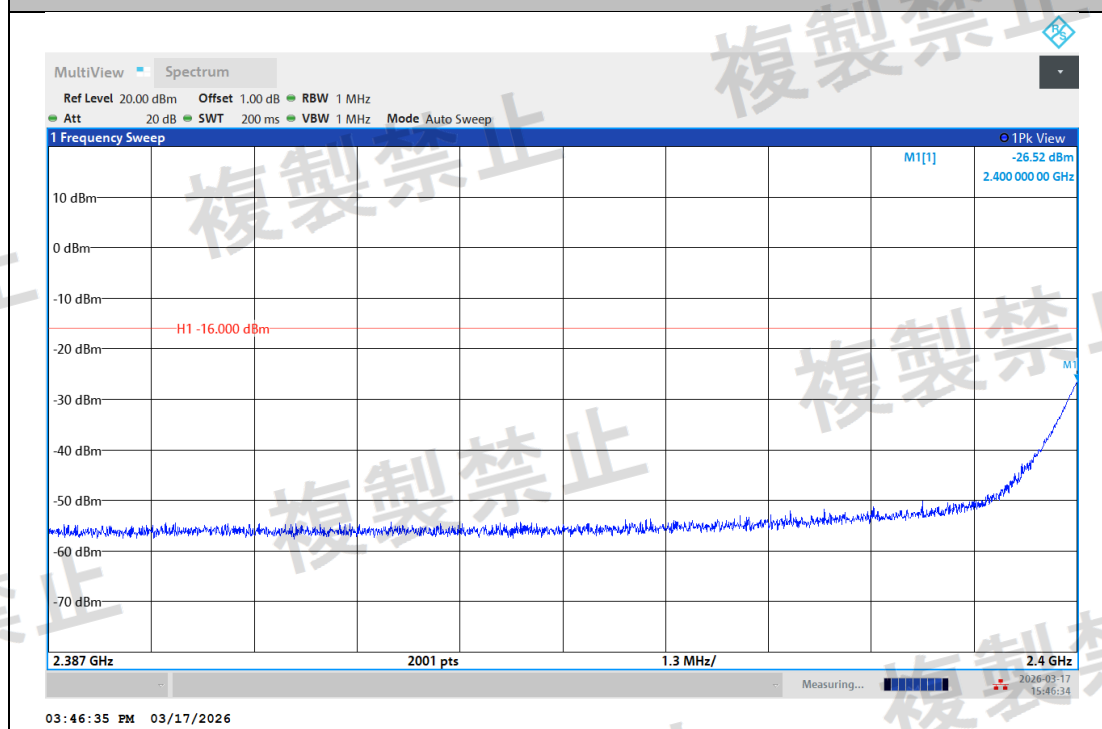


NTNV-DH5-Ant1-2402-2387~2400-PASS

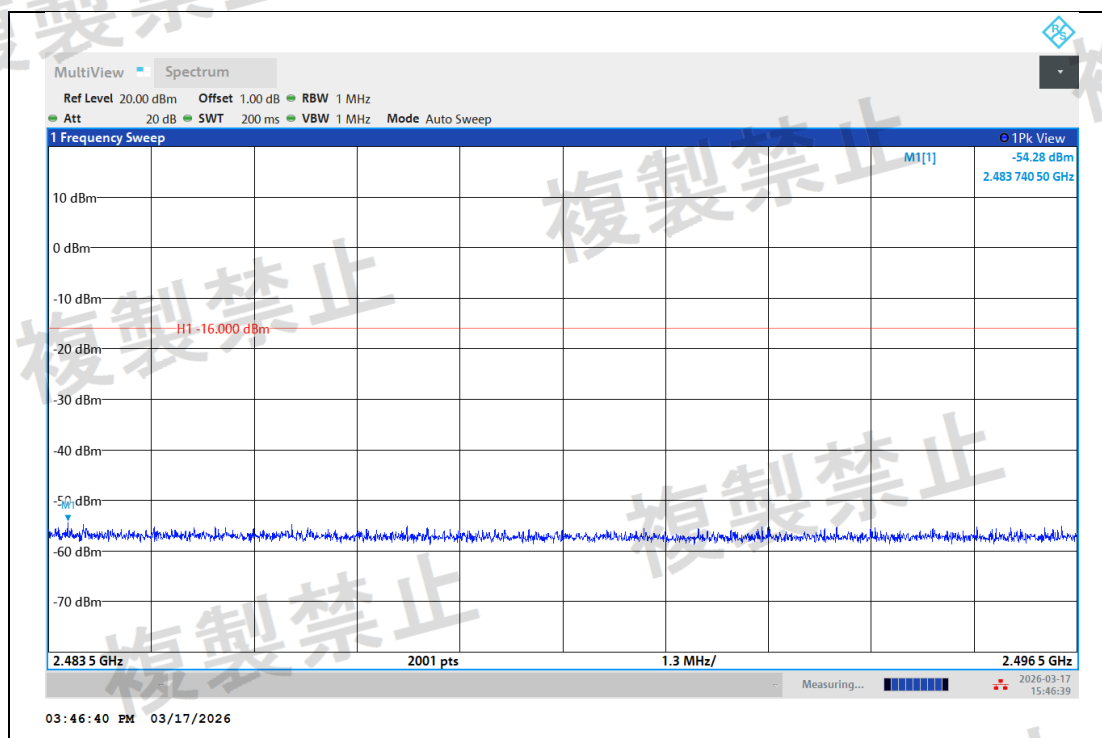


NTNV-DH5-Ant1-2402-2483.5~2496.5-PASS

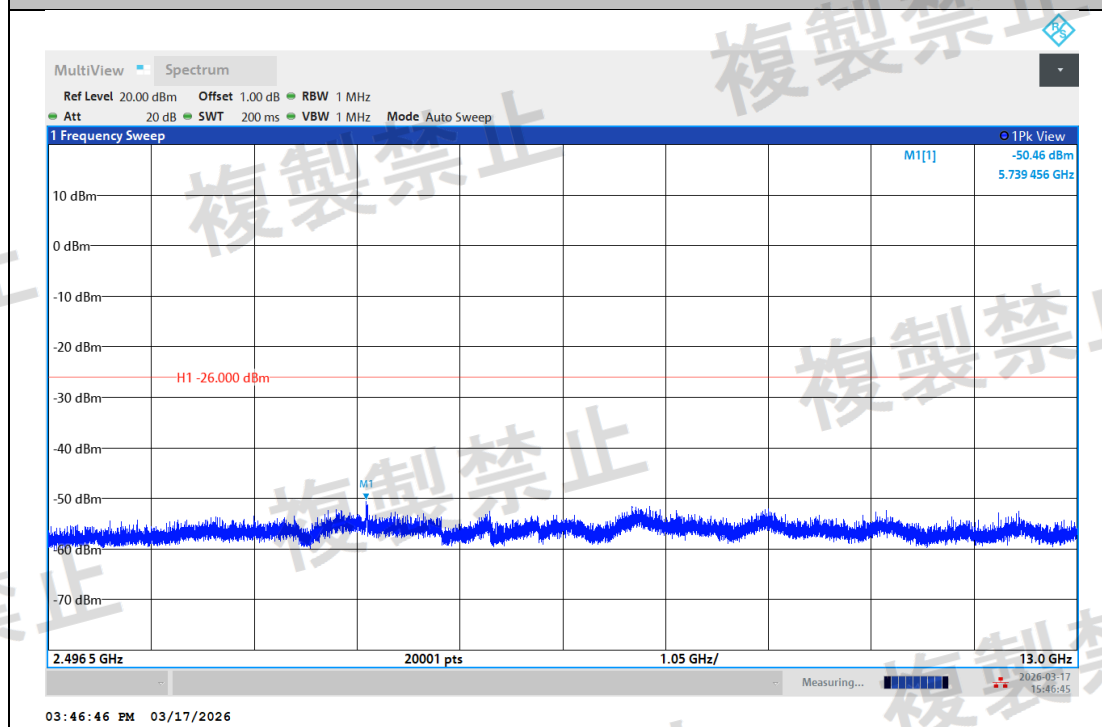


NTNV-DH5-Ant1-2402-2496.5~13000-PASS

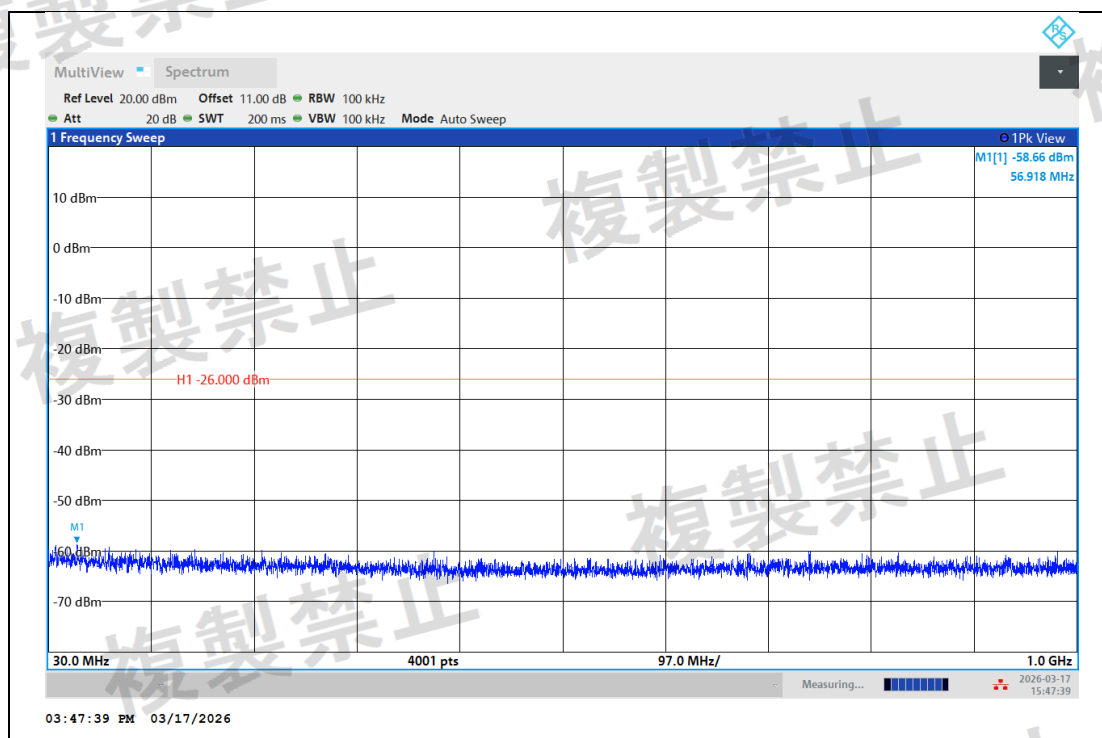


NTNV-DH5-Ant1-2441-30~1000-PASS

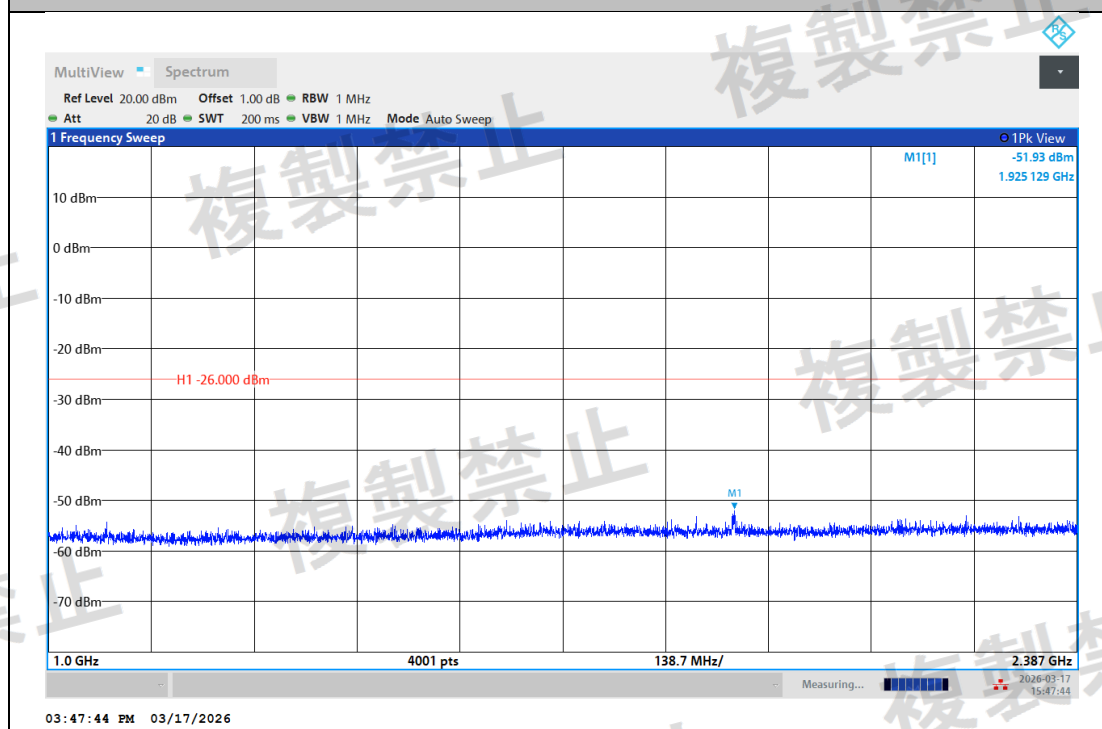


NTNV-DH5-Ant1-2441-1000~2387-PASS

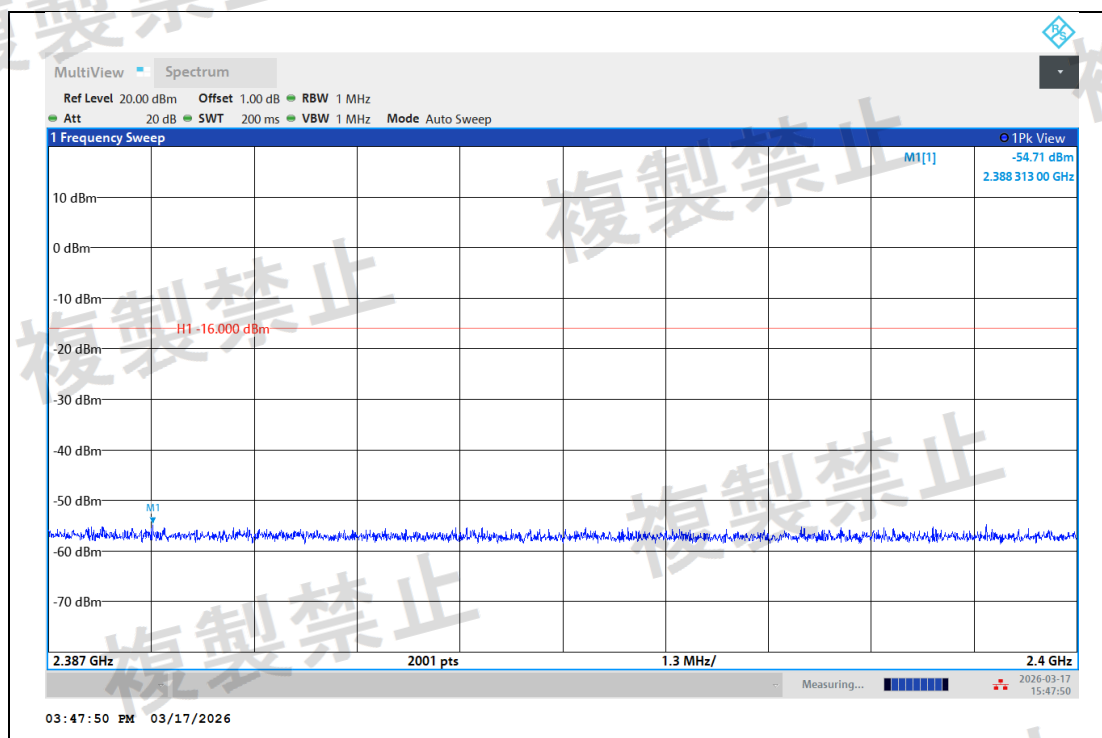


NTNV-DH5-Ant1-2441-2387~2400-PASS

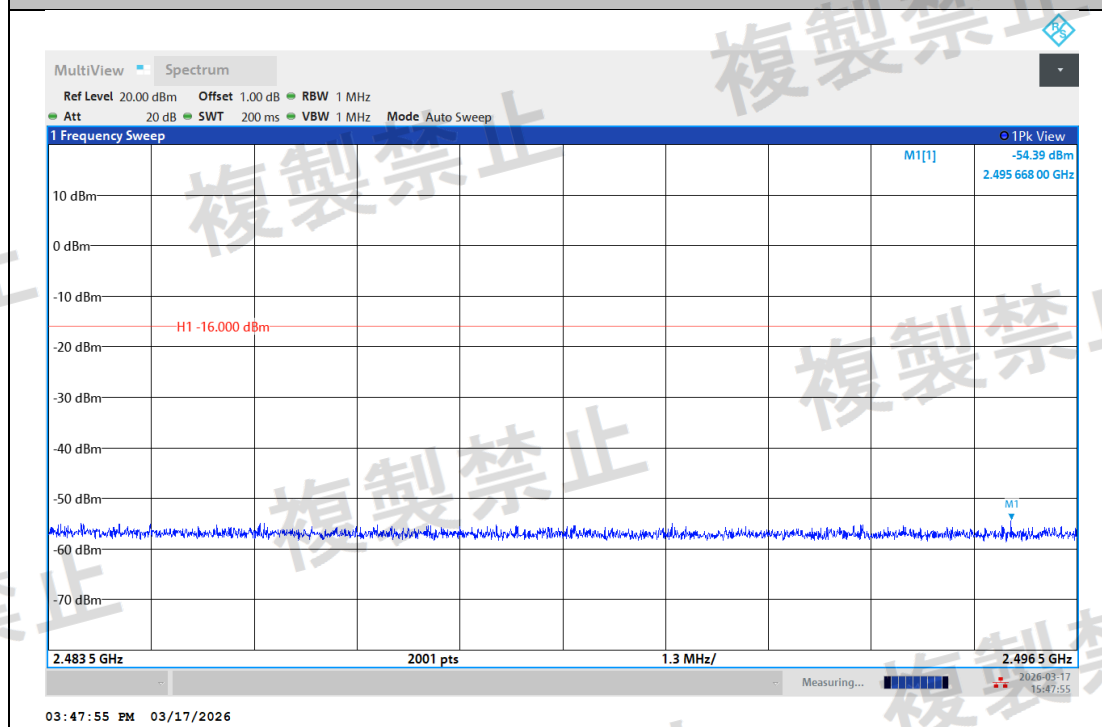


NTNV-DH5-Ant1-2441-2483.5~2496.5-PASS

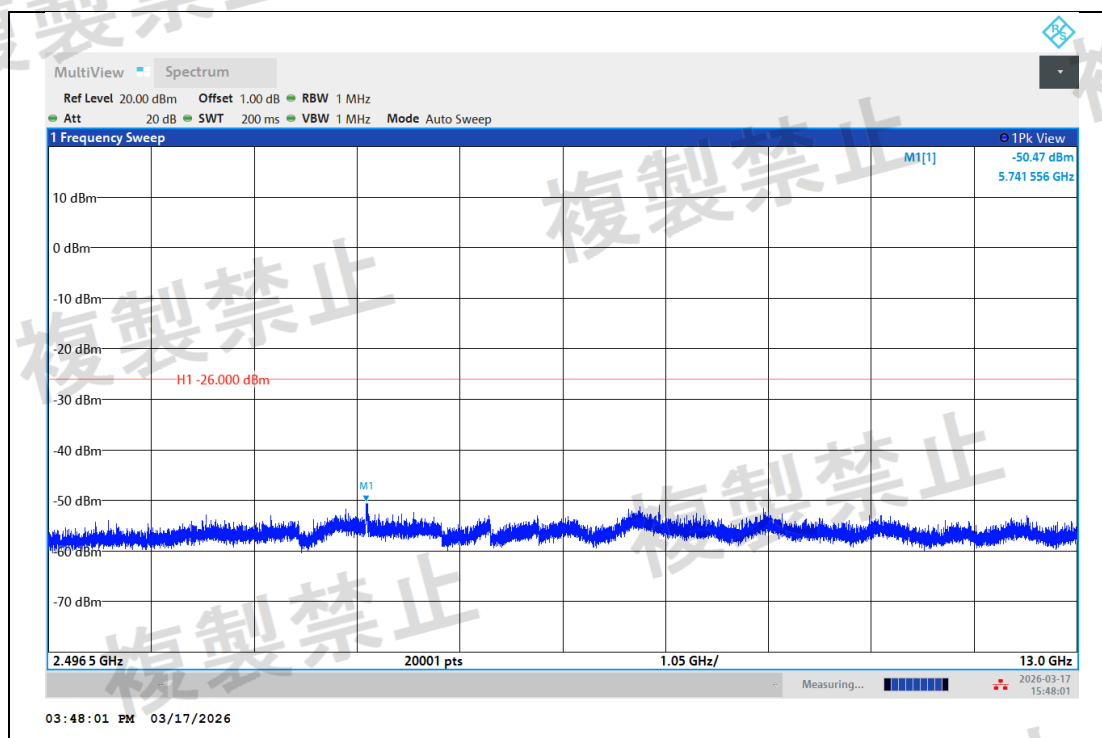


NTNV-DH5-Ant1-2441-2496.5~13000-PASS

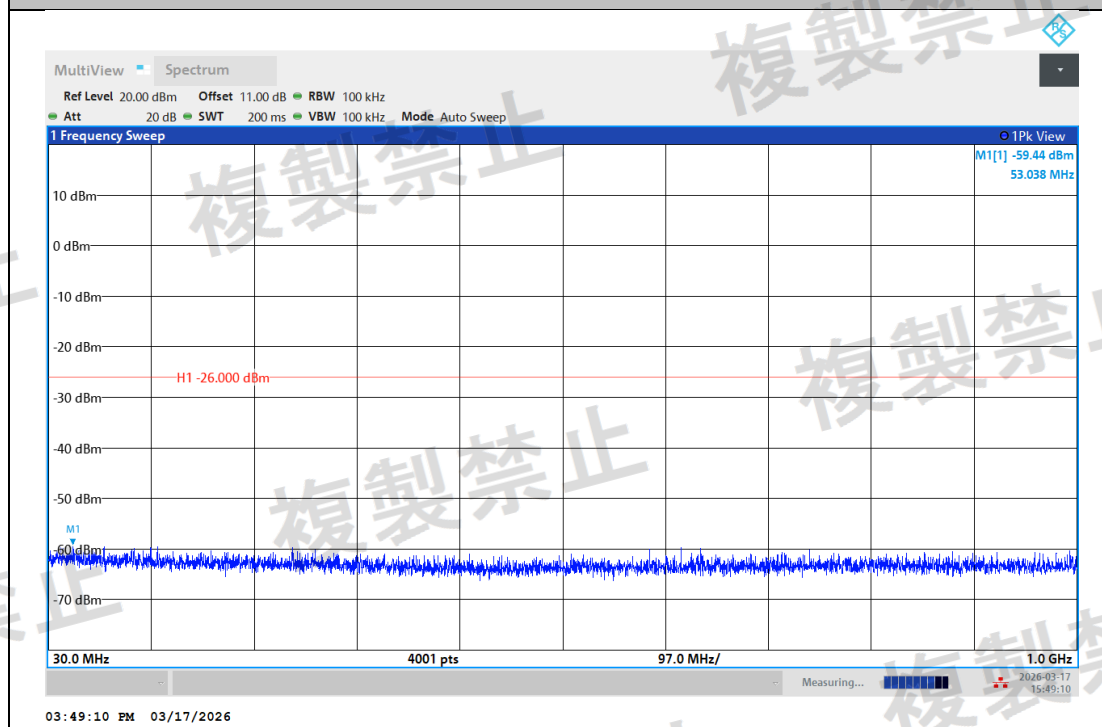


NTNV-DH5-Ant1-2480-30~1000-PASS

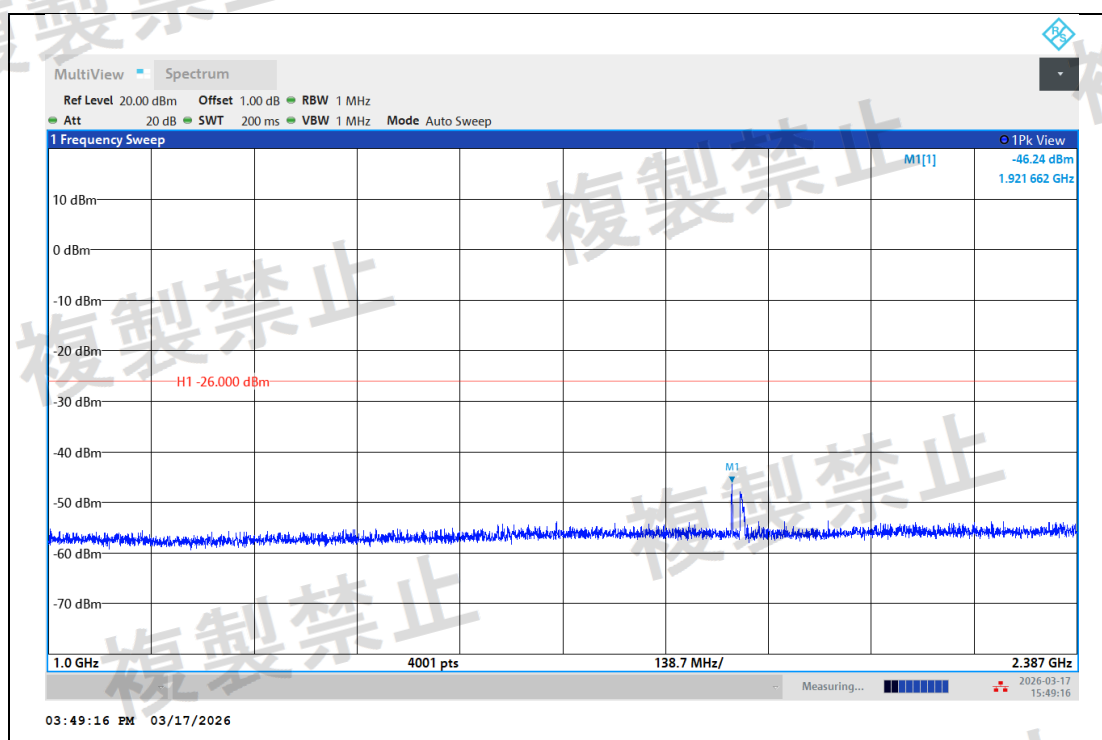


NTNV-DH5-Ant1-2480-1000~2387-PASS

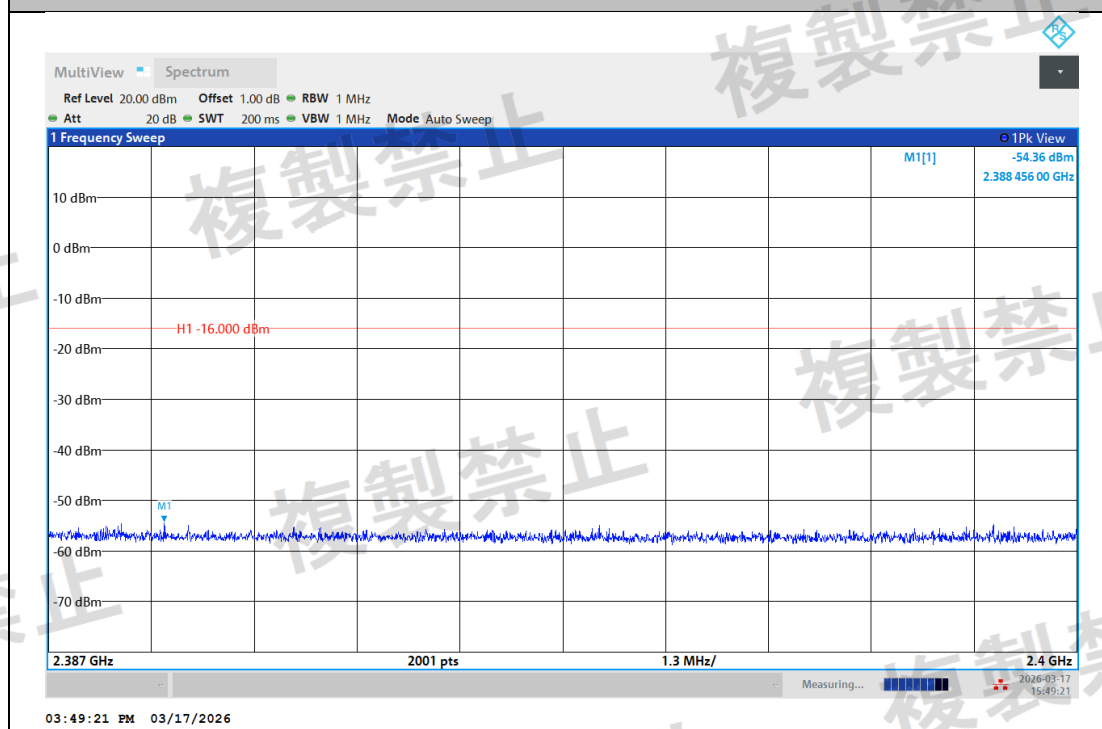


NTNV-DH5-Ant1-2480-2387~2400-PASS

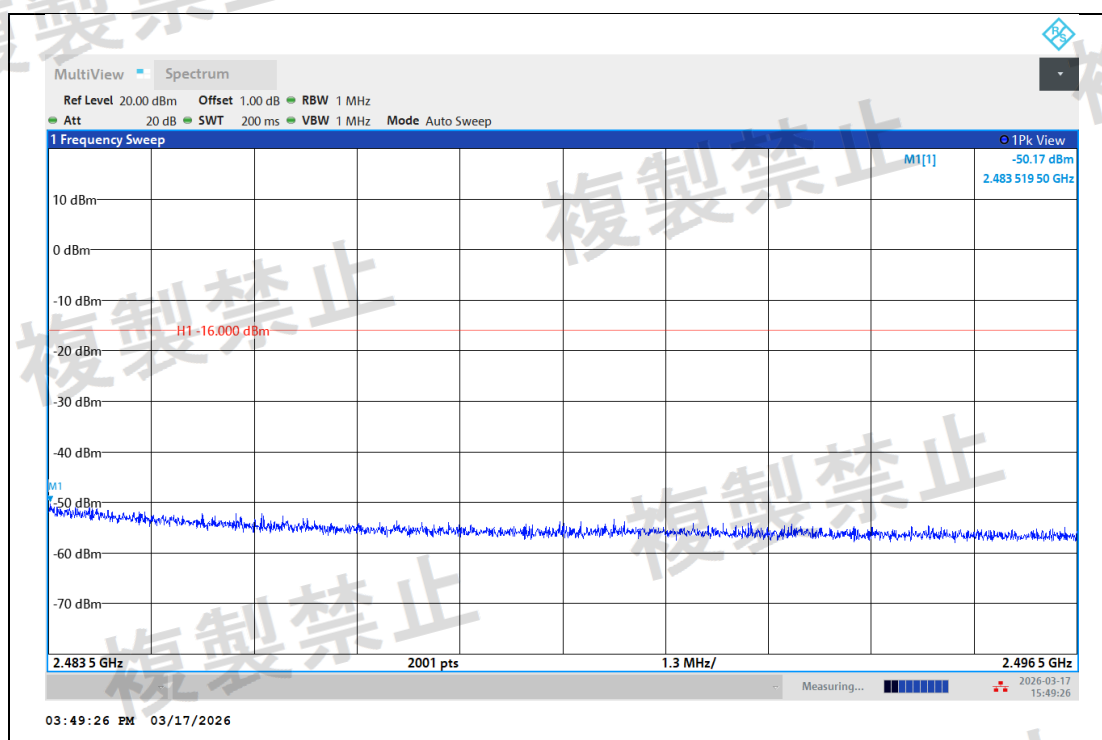


NTNV-DH5-Ant1-2480-2483.5~2496.5-PASS

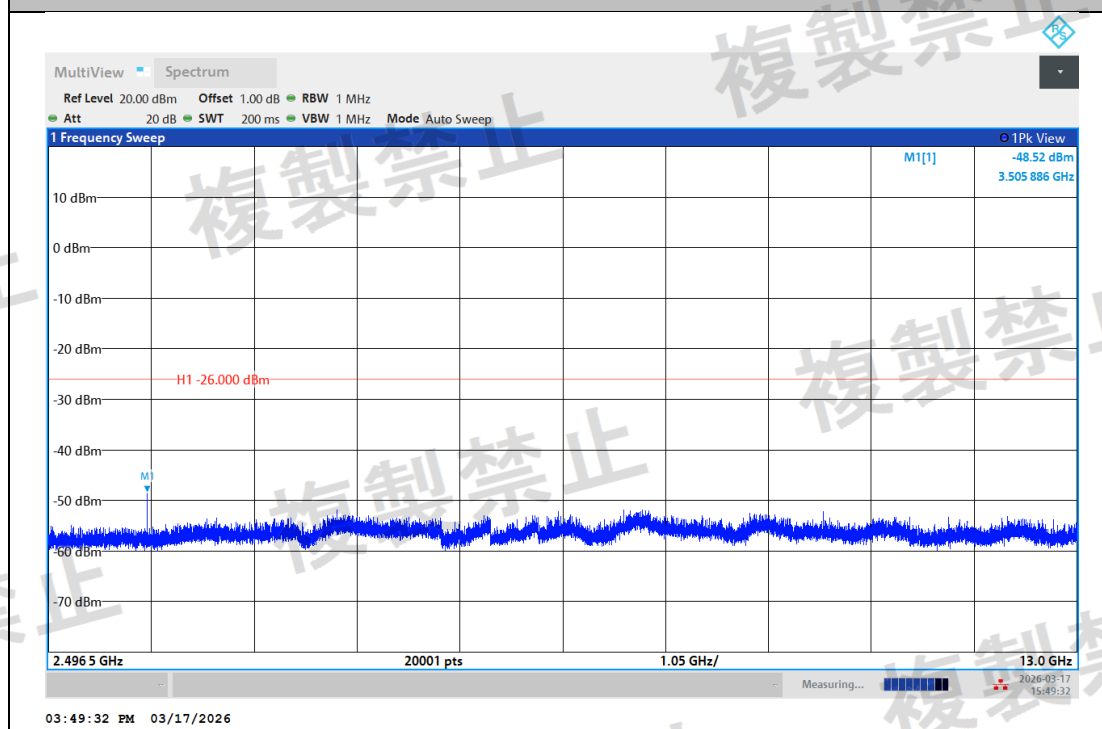


NTNV-DH5-Ant1-2480-2496.5~13000-PASS

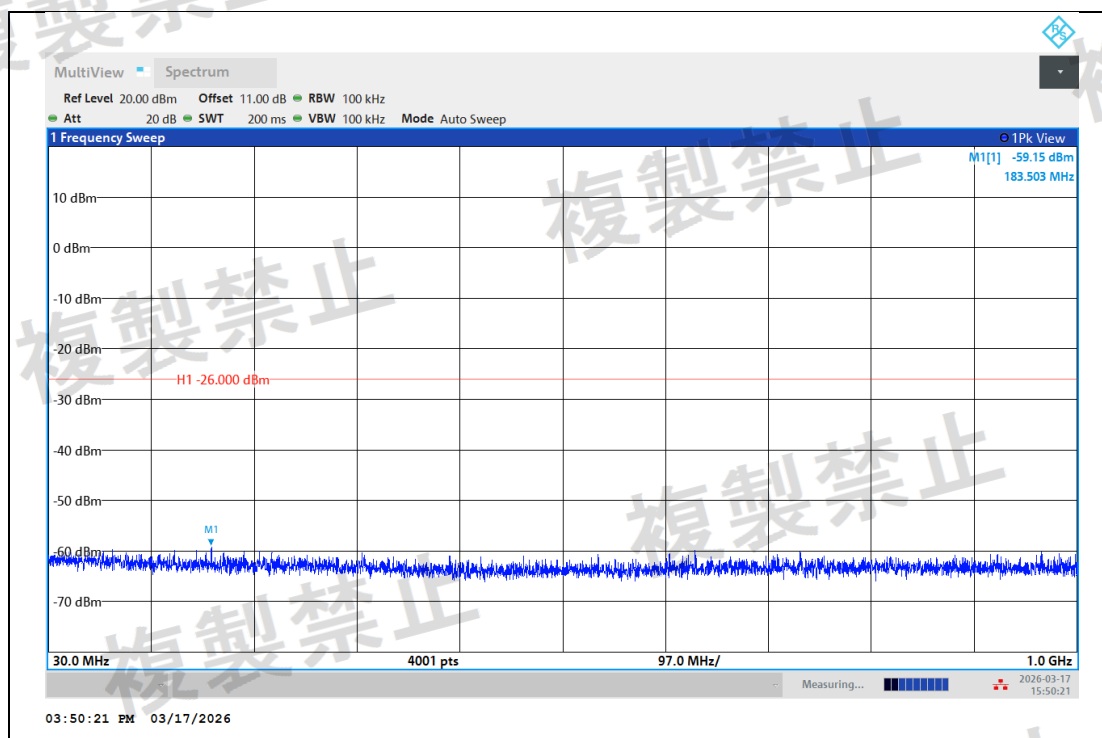


NTNV-2DH5-Ant1-2402-30~1000-PASS

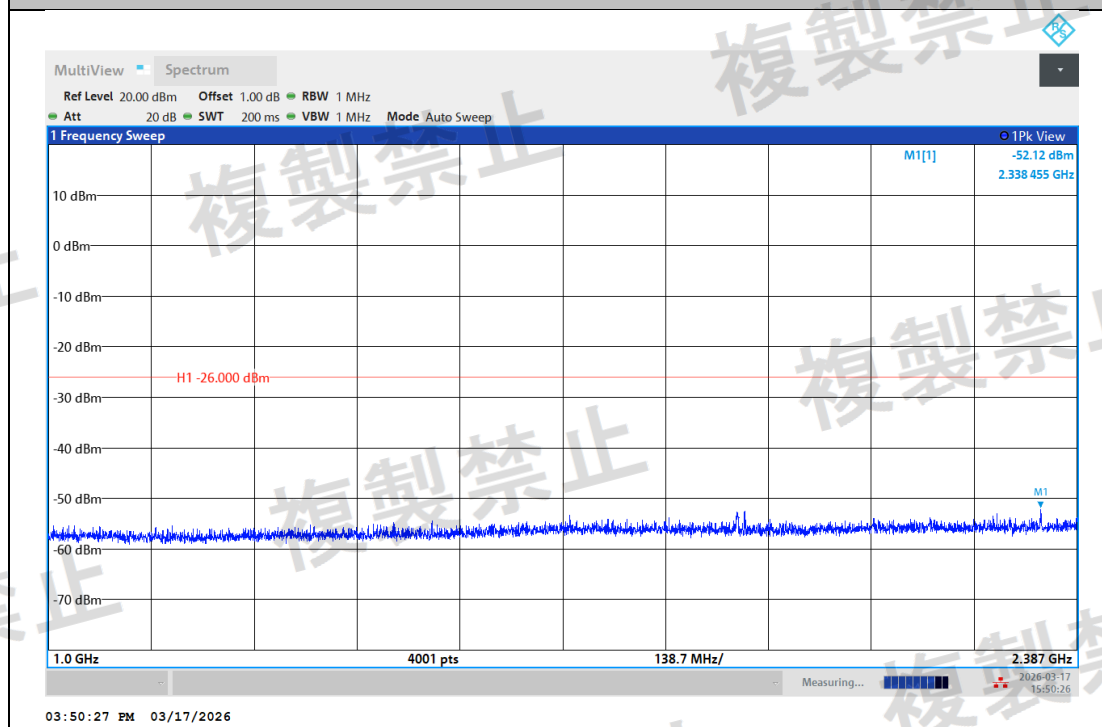


NTNV-2DH5-Ant1-2402-1000~2387-PASS

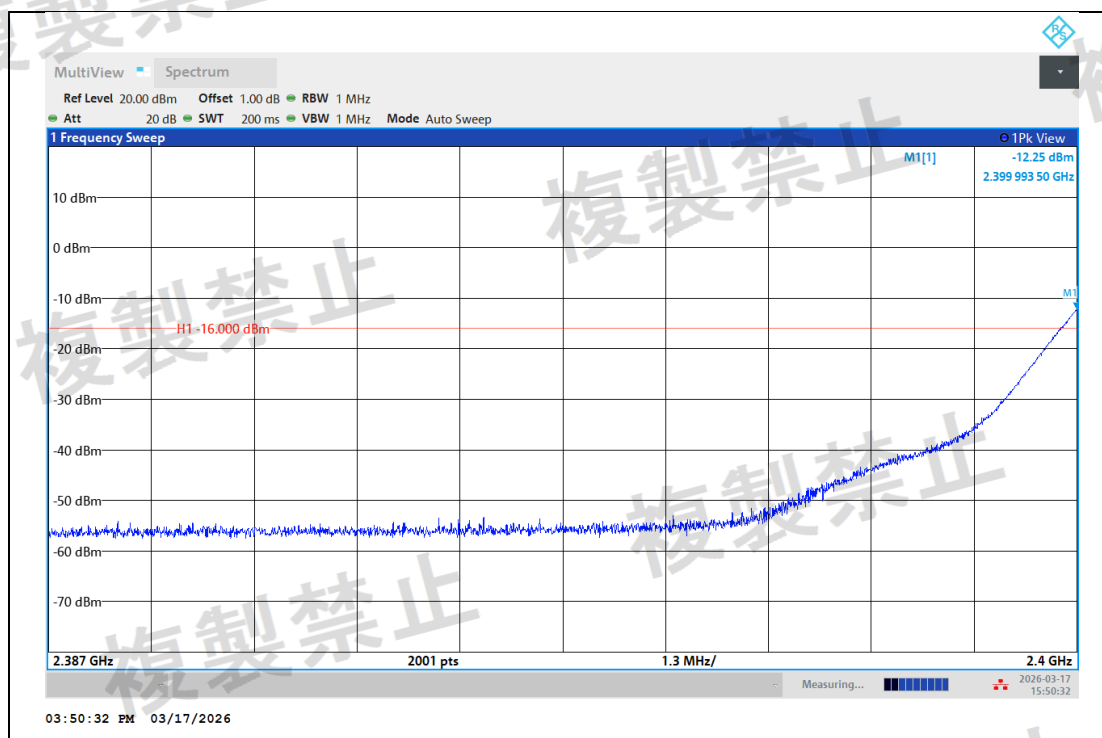


NTNV-2DH5-Ant1-2402-2387~2400-See table below

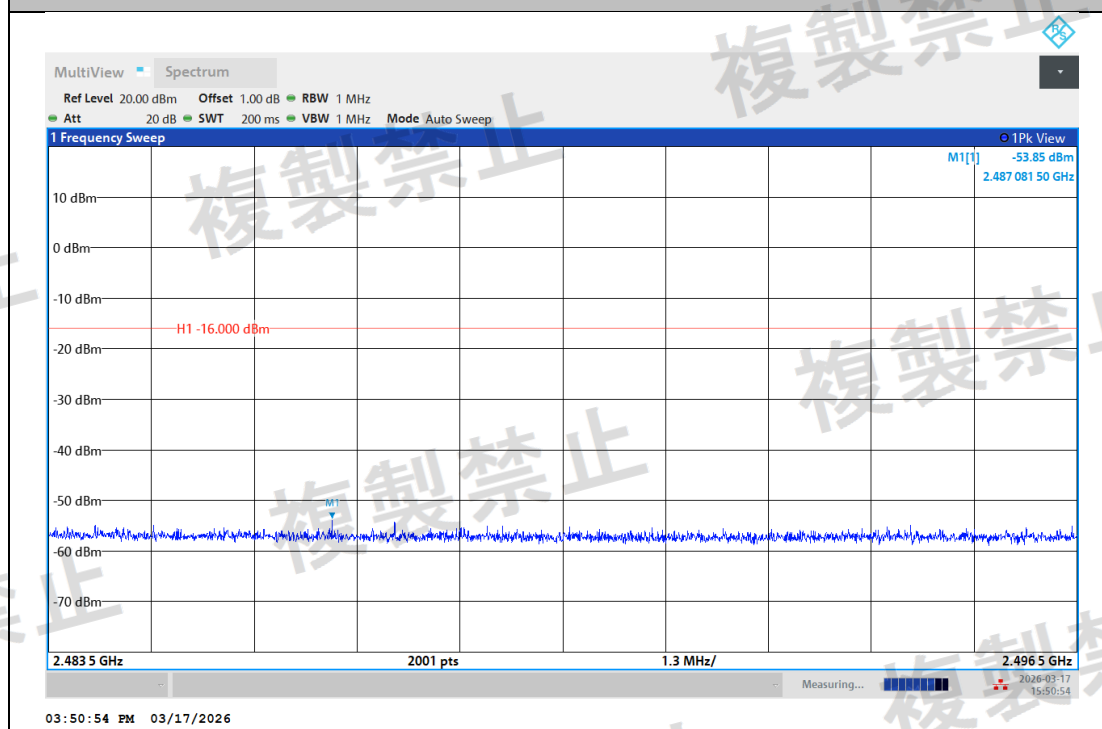


NTNV-2DH5-Ant1-2402-2483.5~2496.5-PASS

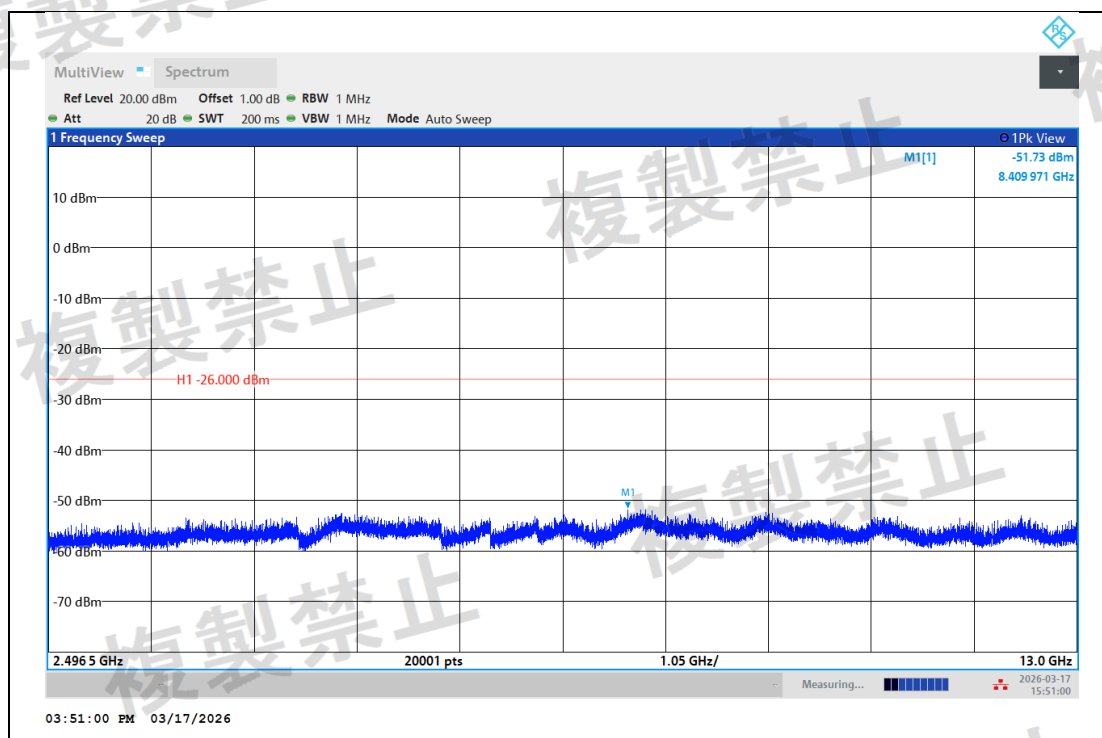


NTNV-2DH5-Ant1-2402-2496.5~13000-PASS

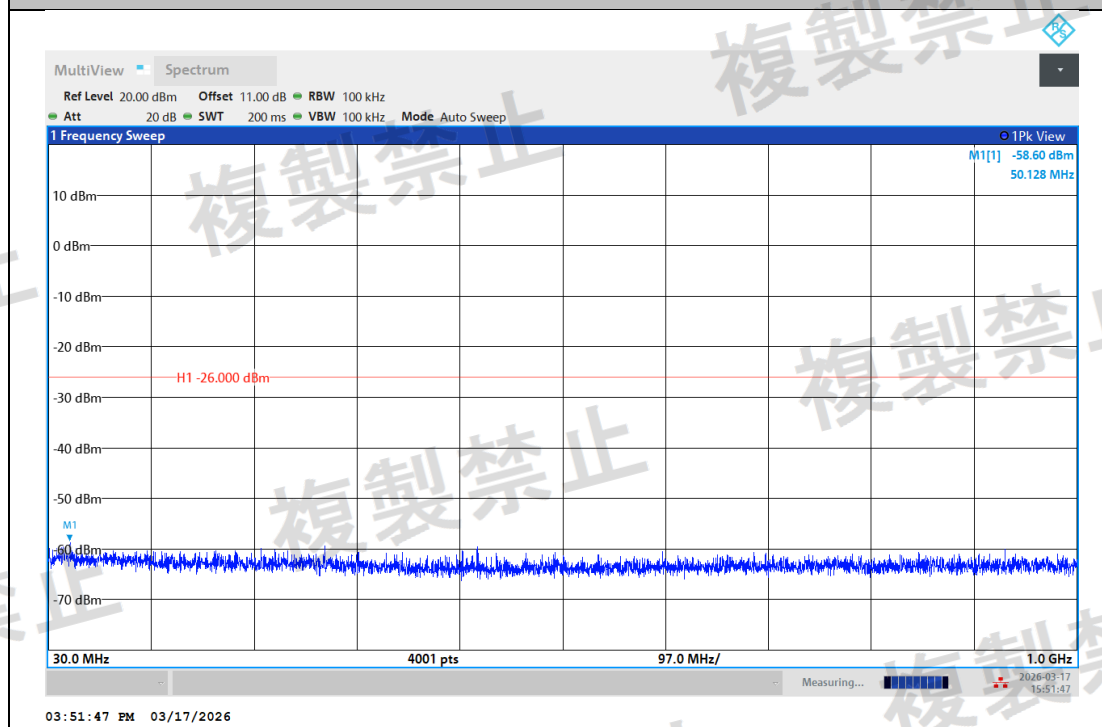


NTNV-2DH5-Ant1-2441-30~1000-PASS

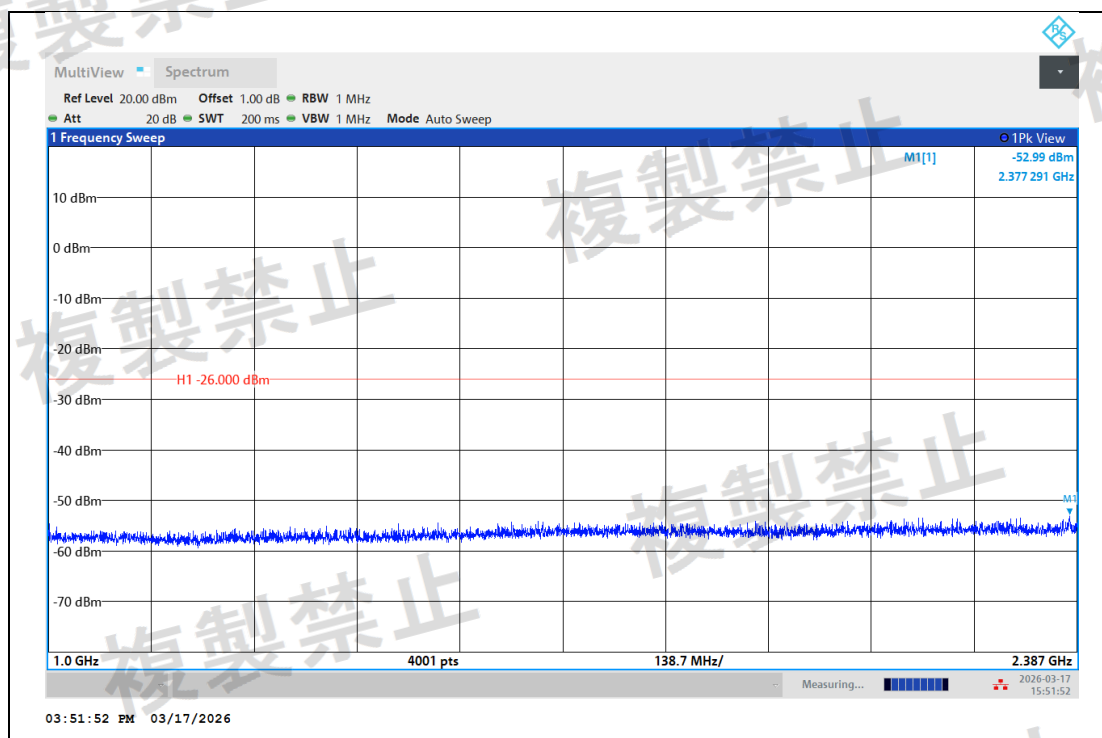


NTNV-2DH5-Ant1-2441-1000~2387-PASS

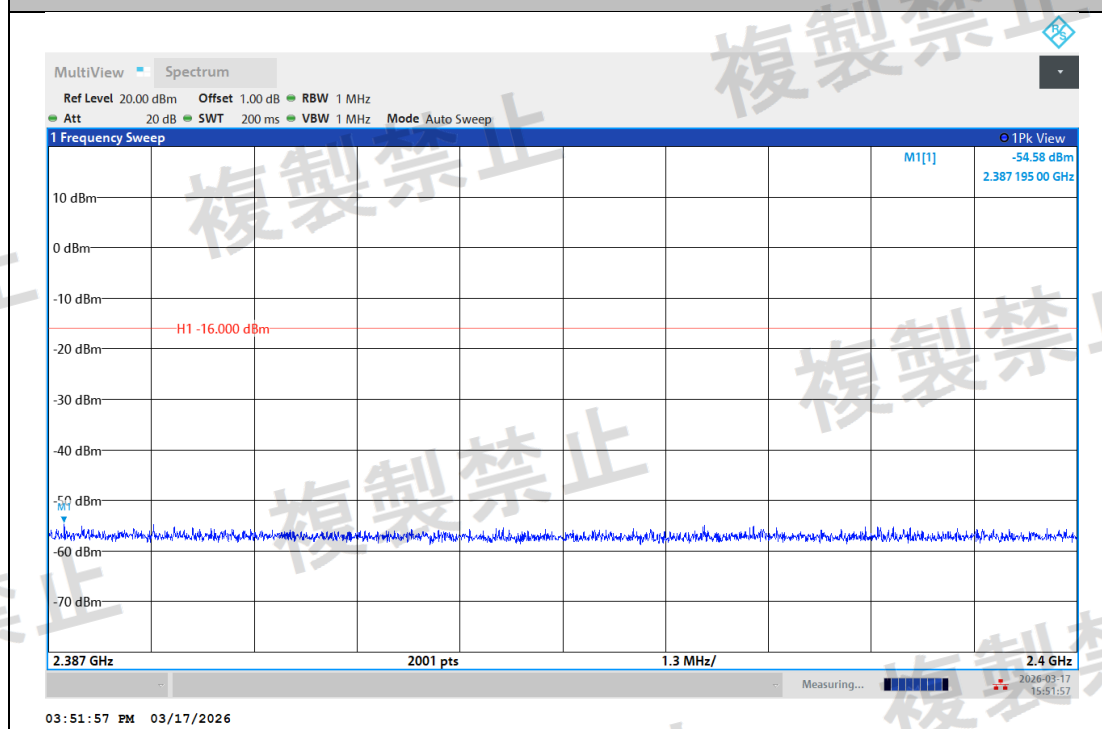


NTNV-2DH5-Ant1-2441-2387~2400-PASS

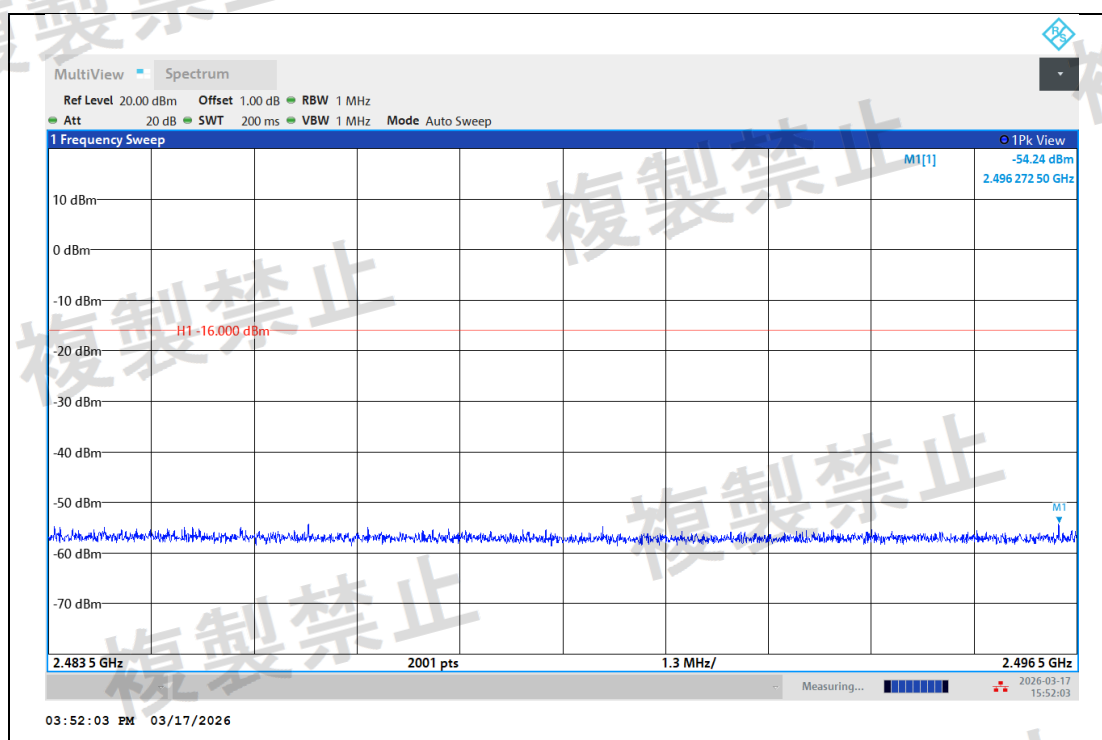


NTNV-2DH5-Ant1-2441-2483.5~2496.5-PASS

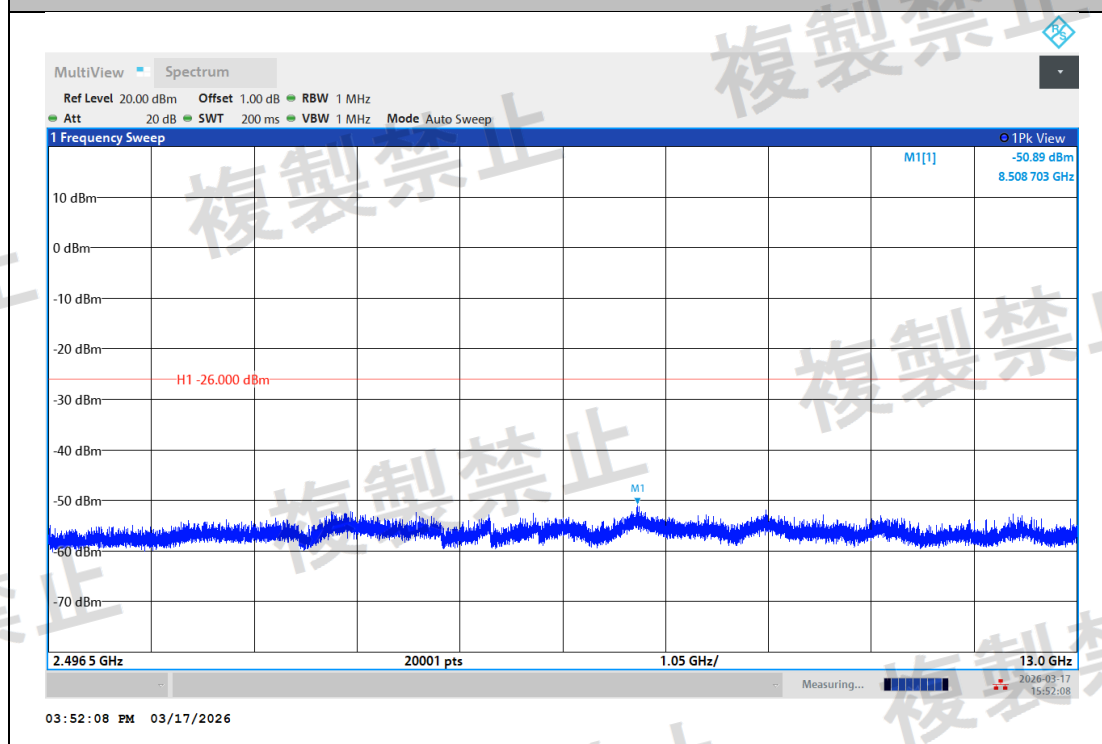


NTNV-2DH5-Ant1-2441-2496.5~13000-PASS

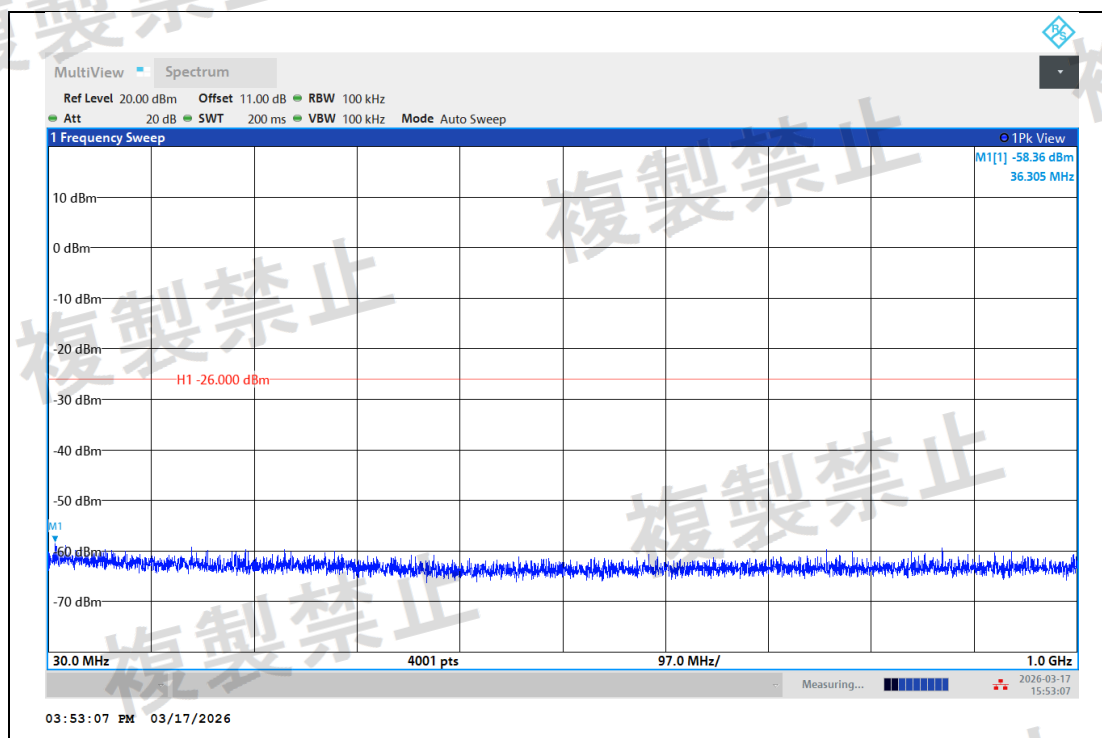


NTNV-2DH5-Ant1-2480-30~1000-PASS

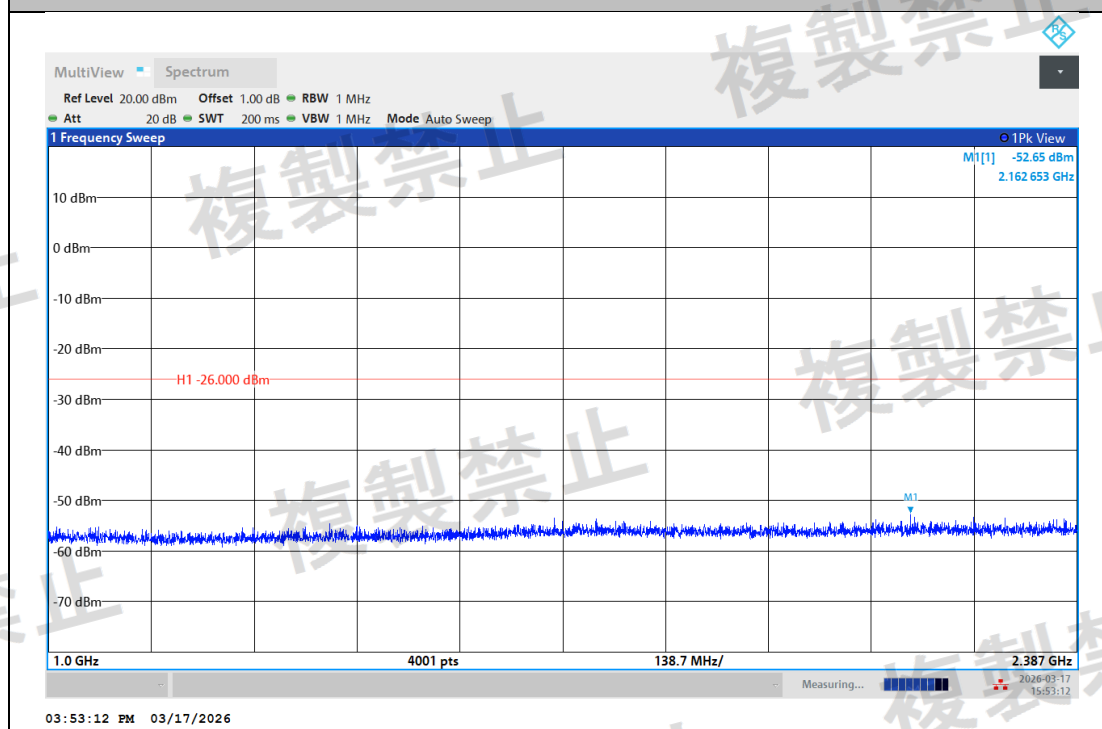


NTNV-2DH5-Ant1-2480-1000~2387-PASS

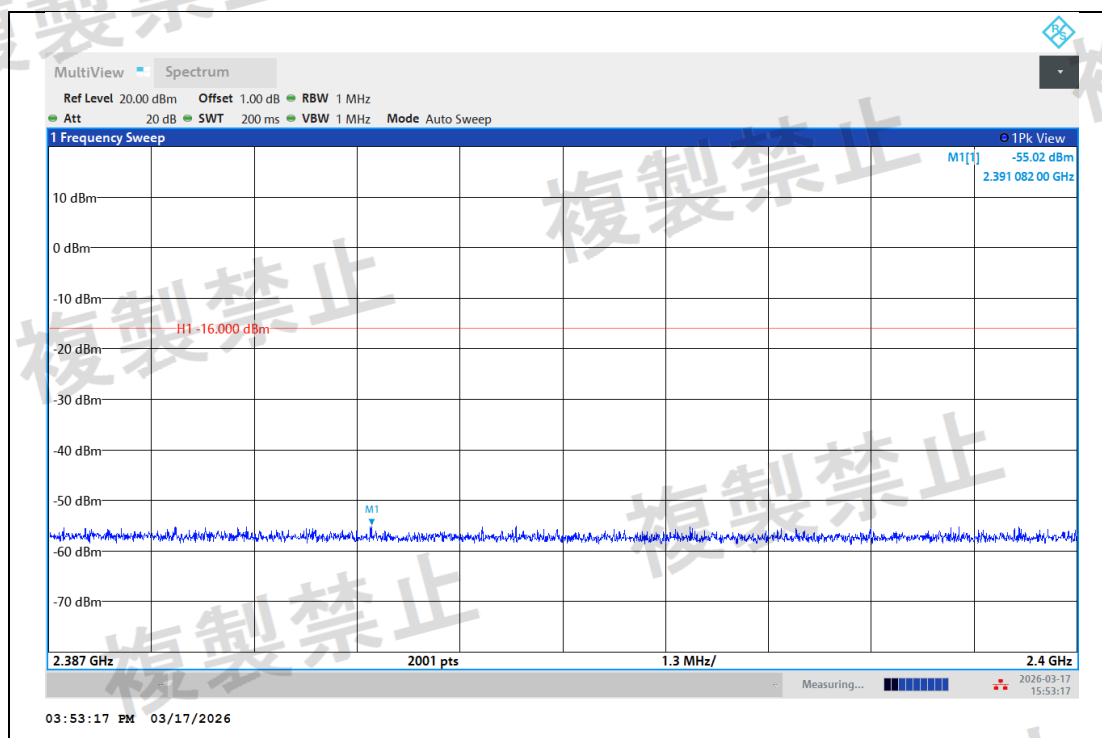


NTVN-2DH5-Ant1-2480-2387~2400-PASS

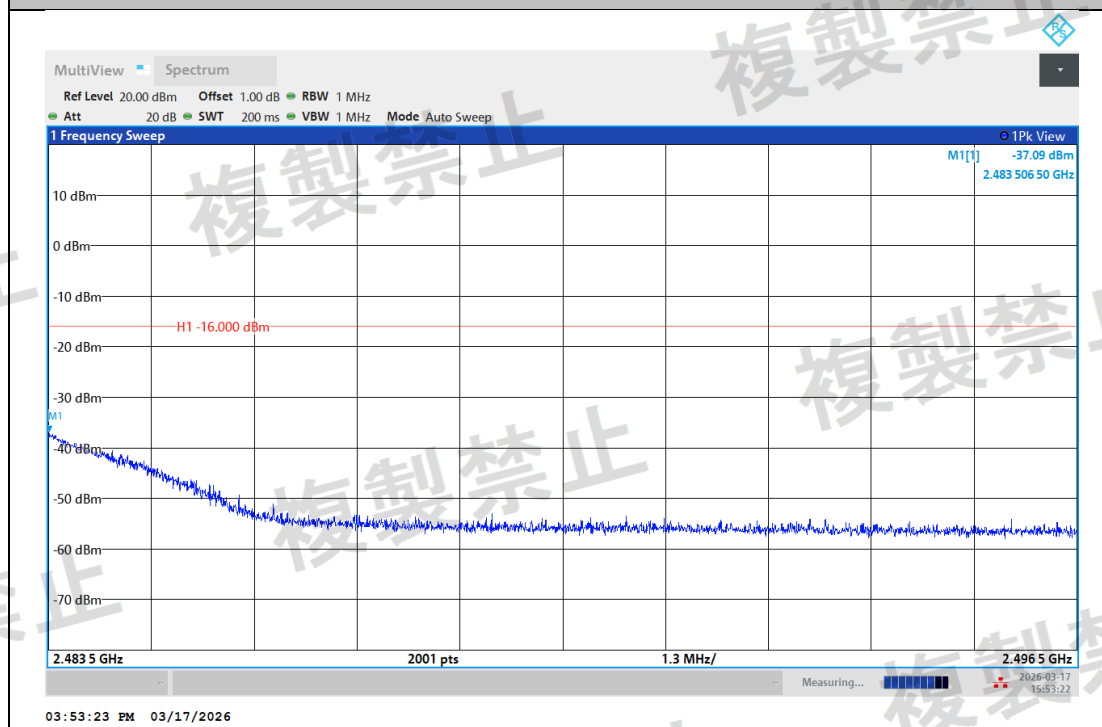


NTVN-2DH5-Ant1-2480-2483.5~2496.5-PASS

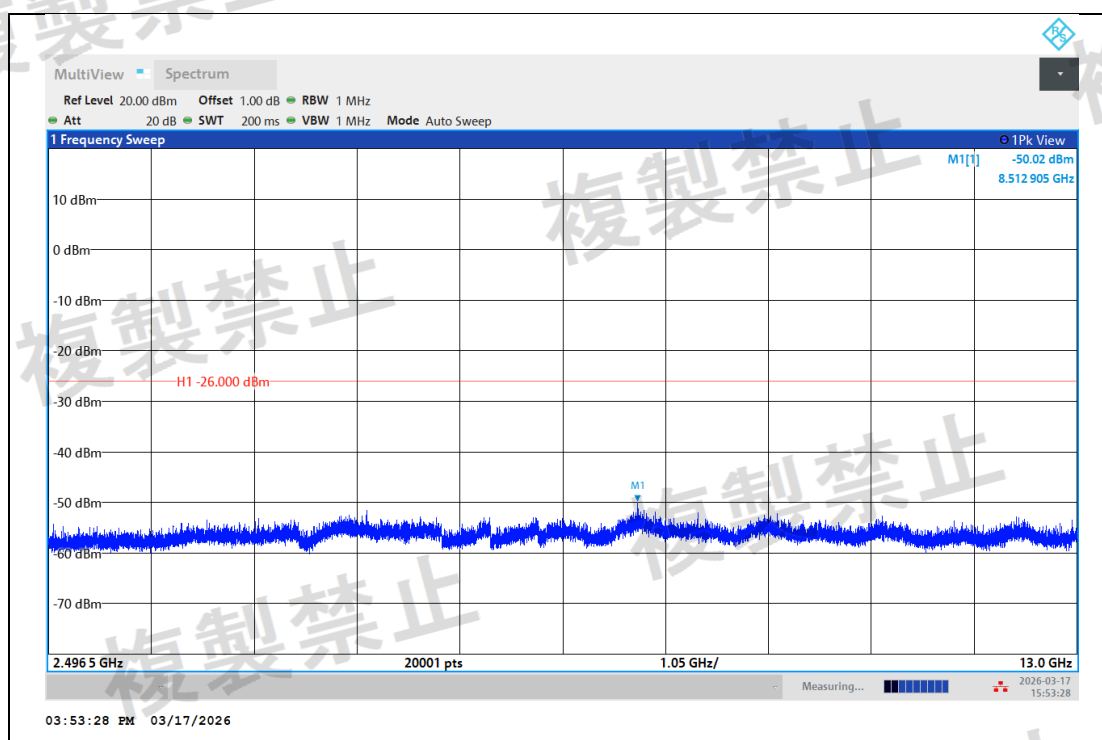


NTNV-2DH5-Ant1-2480-2496.5~13000-PASS

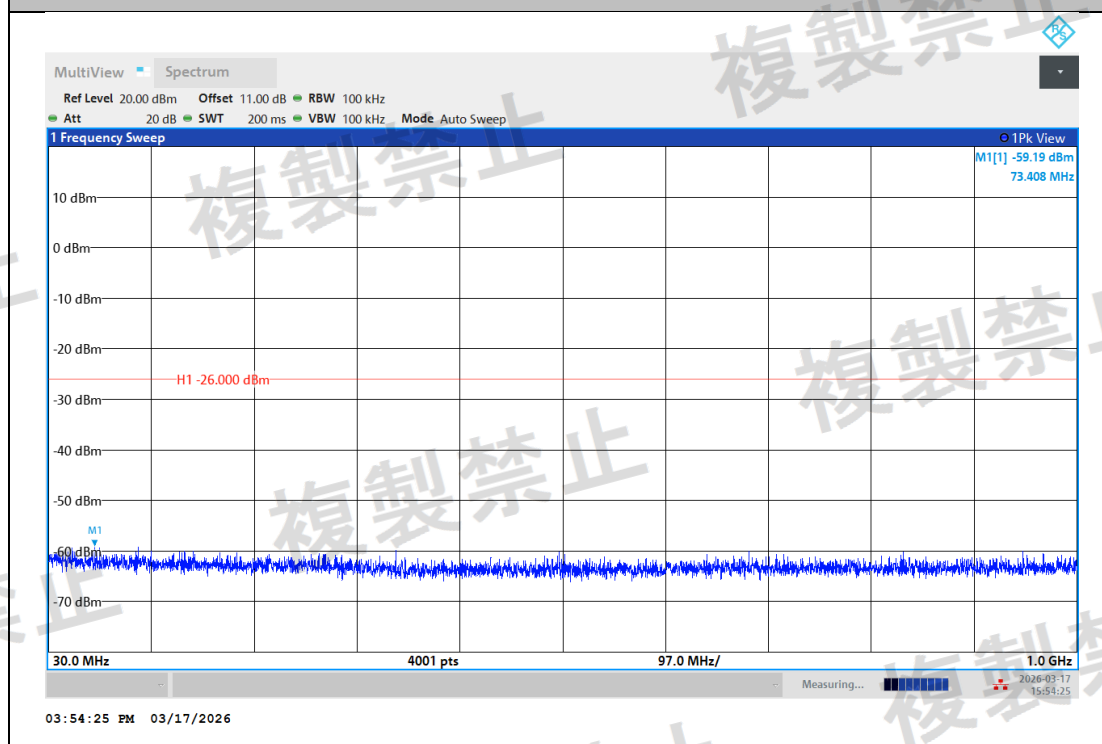


NTNV-3DH5-Ant1-2402-30~1000-PASS

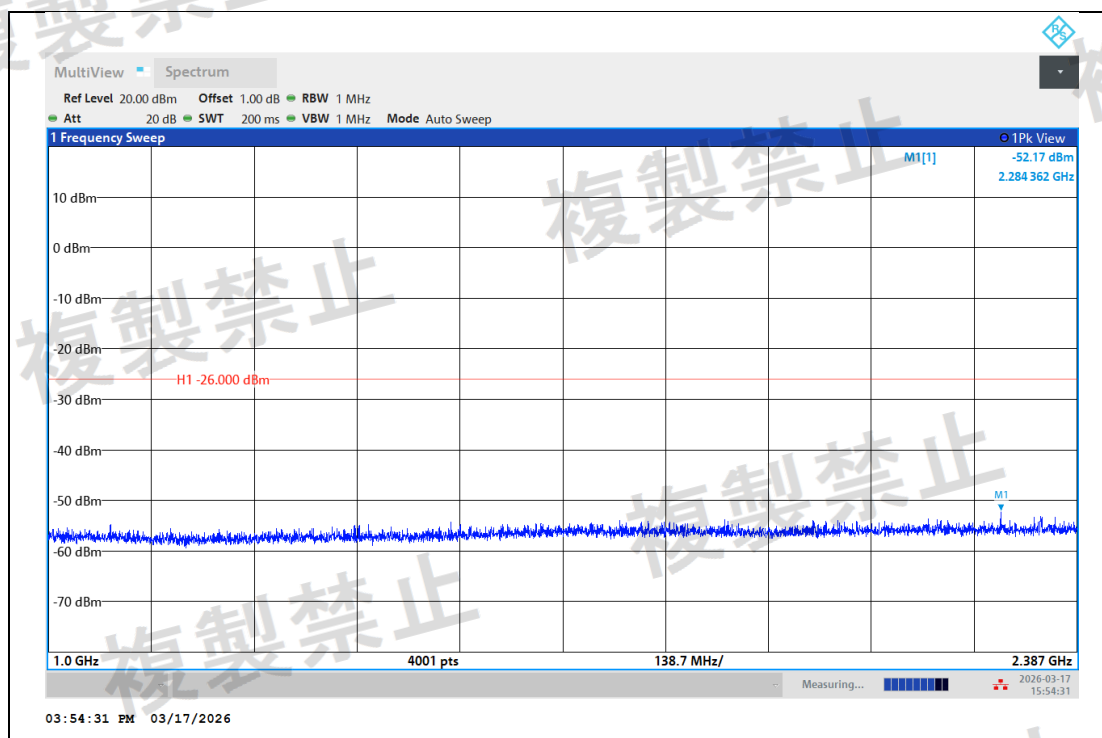


NTNV-3DH5-Ant1-2402-1000~2387-PASS

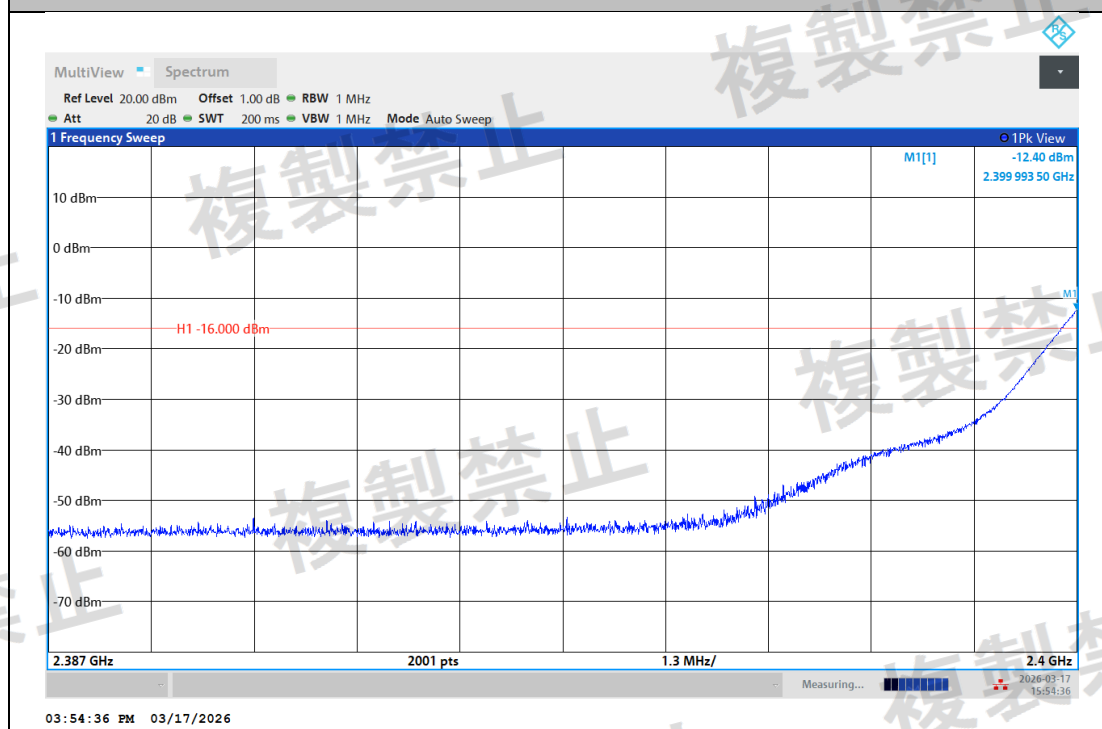


NTNV-3DH5-Ant1-2402-2387~2400-See table below

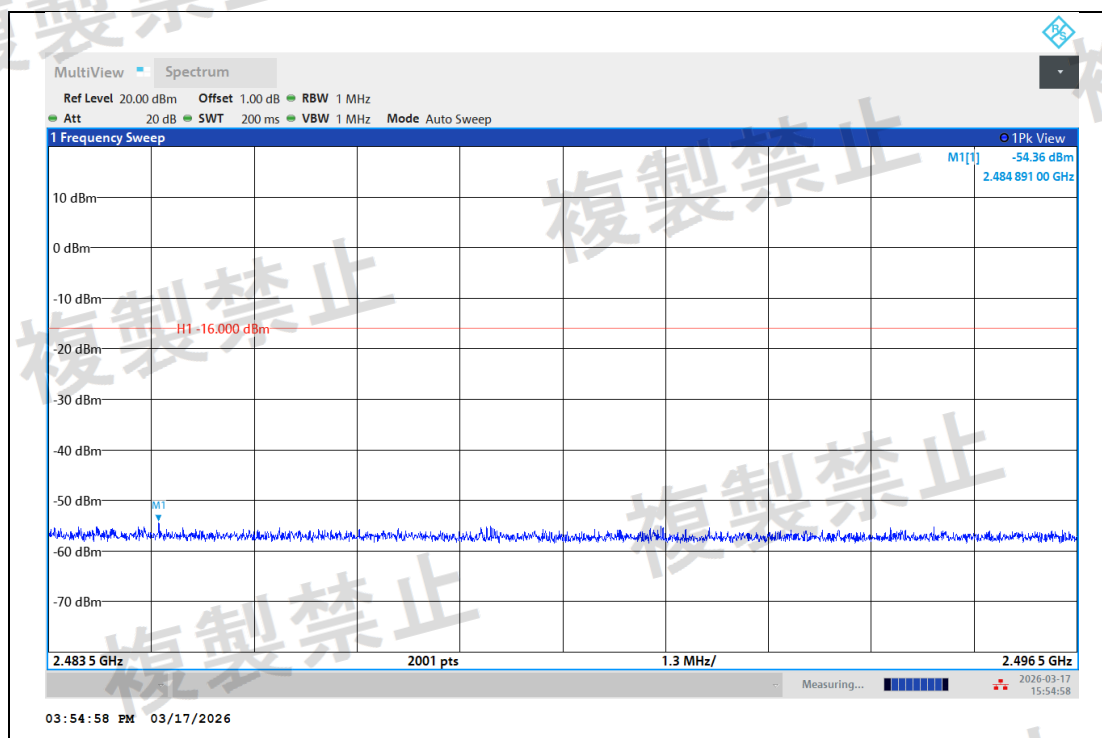


NTNV-3DH5-Ant1-2402-2483.5~2496.5-PASS

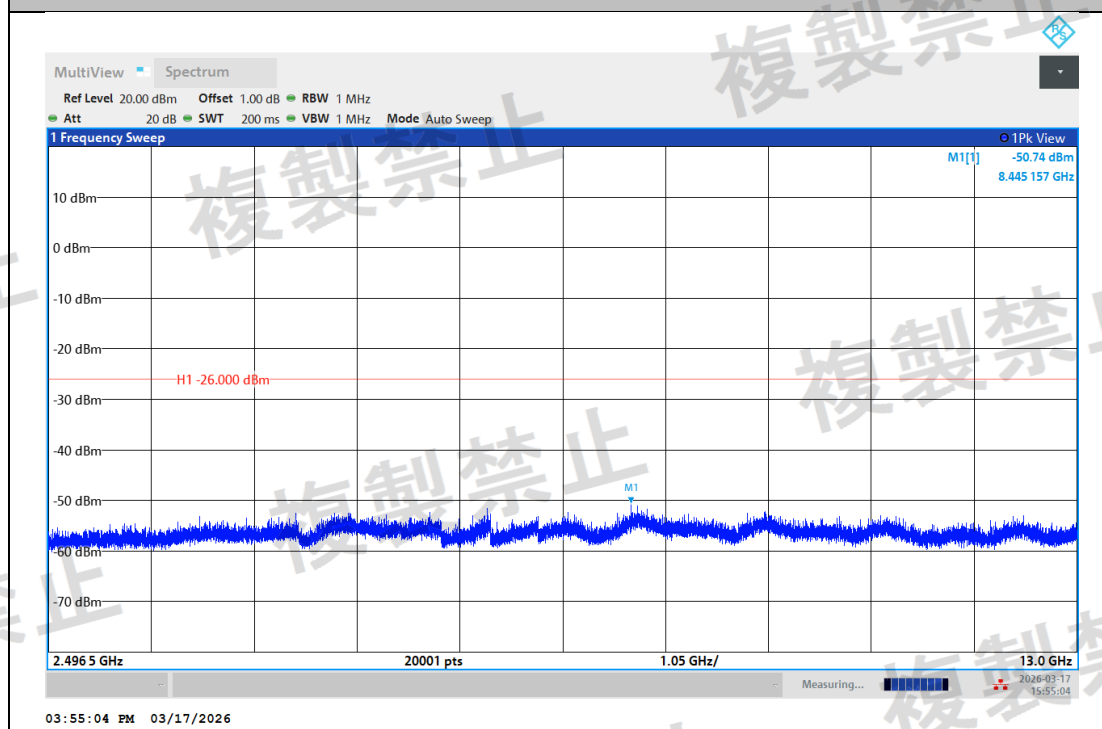


NTNV-3DH5-Ant1-2402-2496.5~13000-PASS

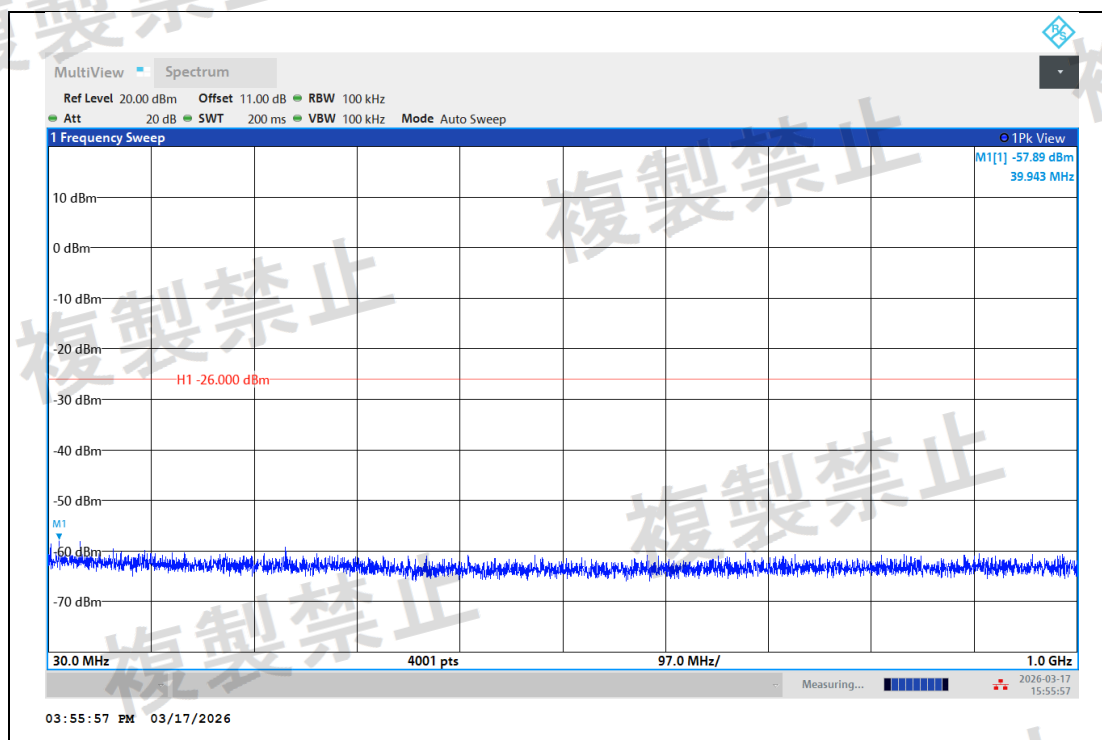


NTNV-3DH5-Ant1-2441-30~1000-PASS

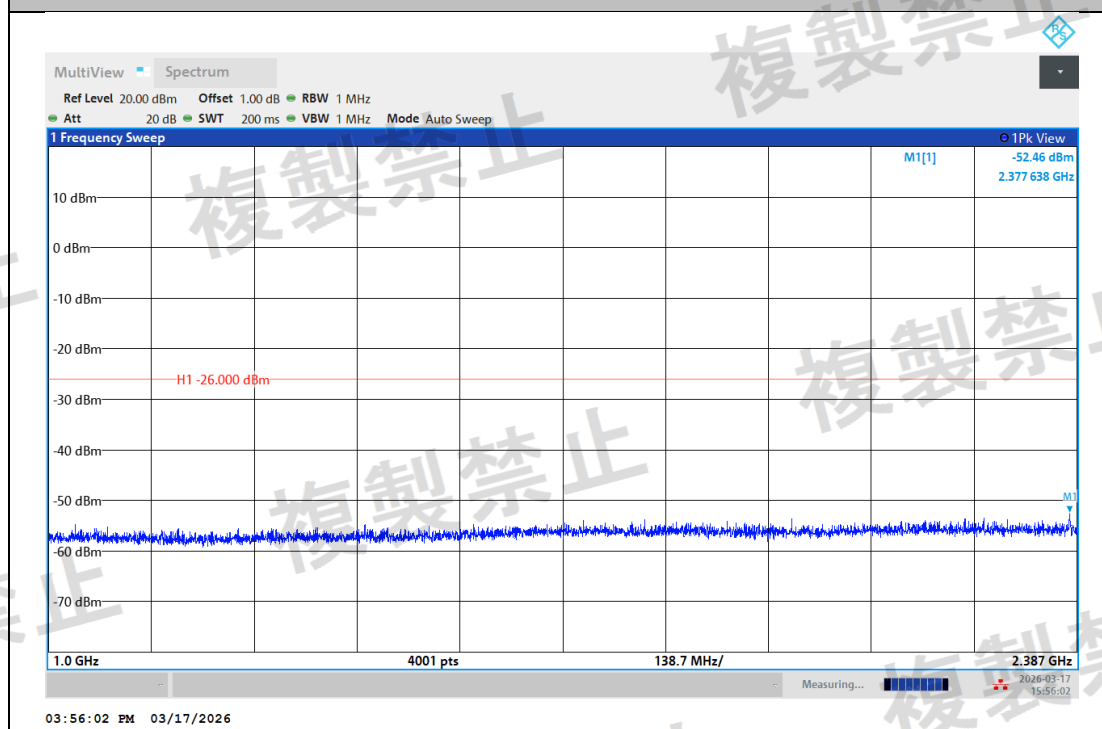


NTNV-3DH5-Ant1-2441-1000~2387-PASS

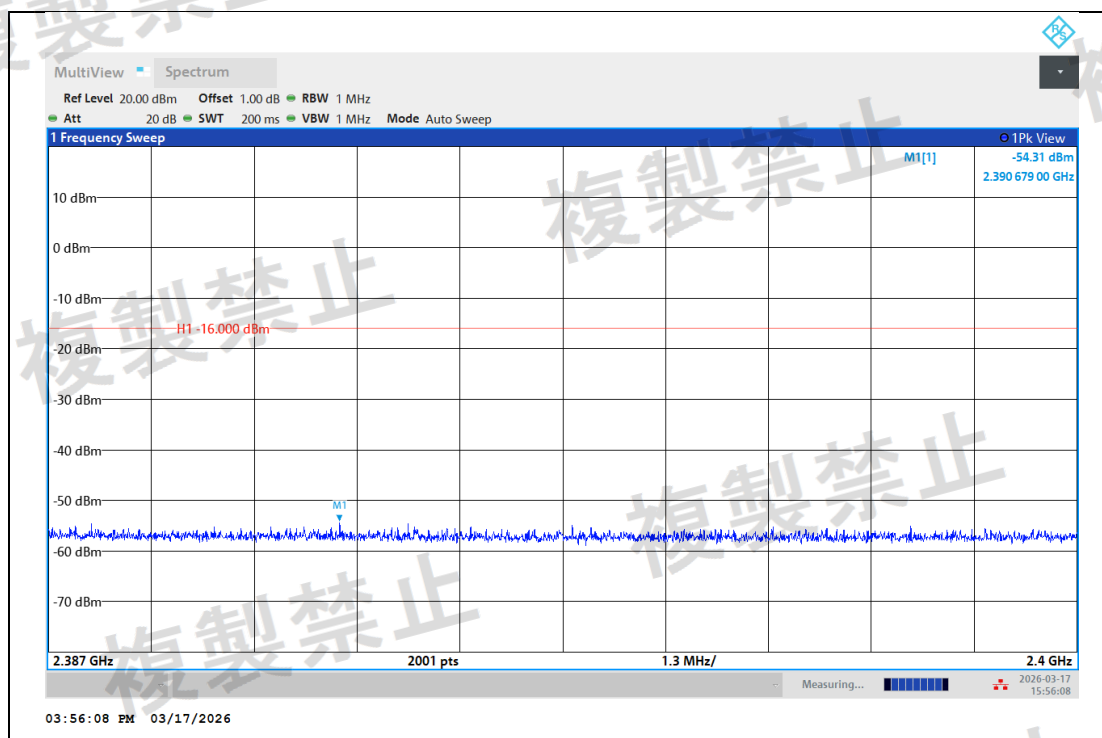


NTNV-3DH5-Ant1-2441-2387~2400-PASS

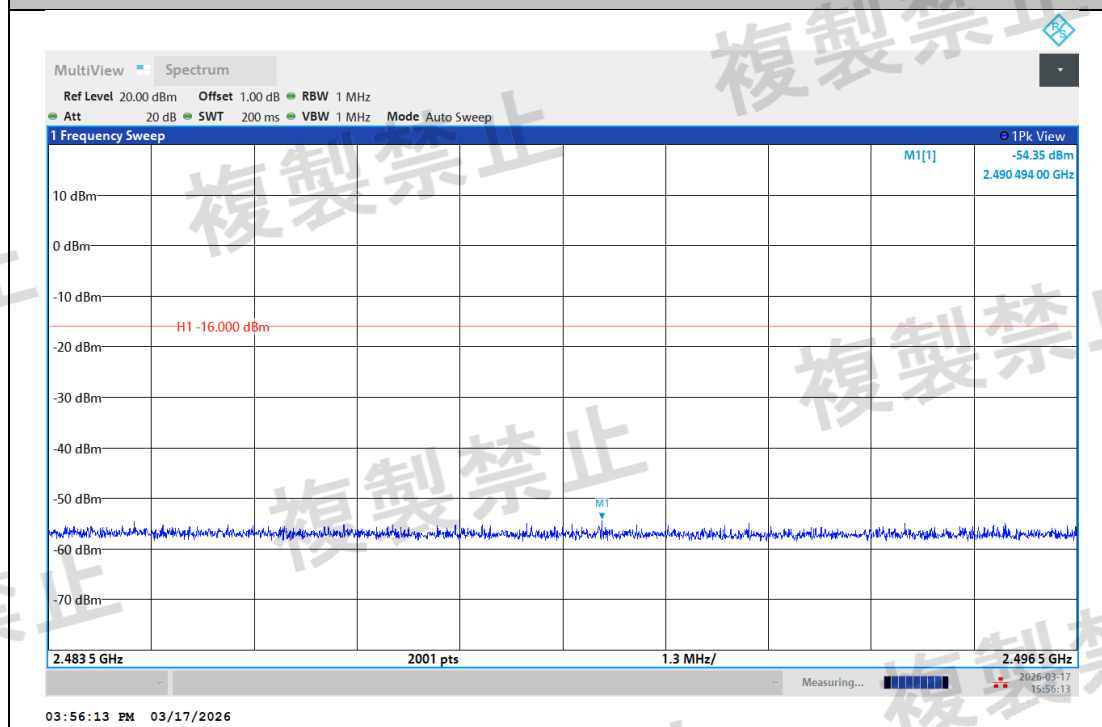


NTNV-3DH5-Ant1-2441-2483.5~2496.5-PASS

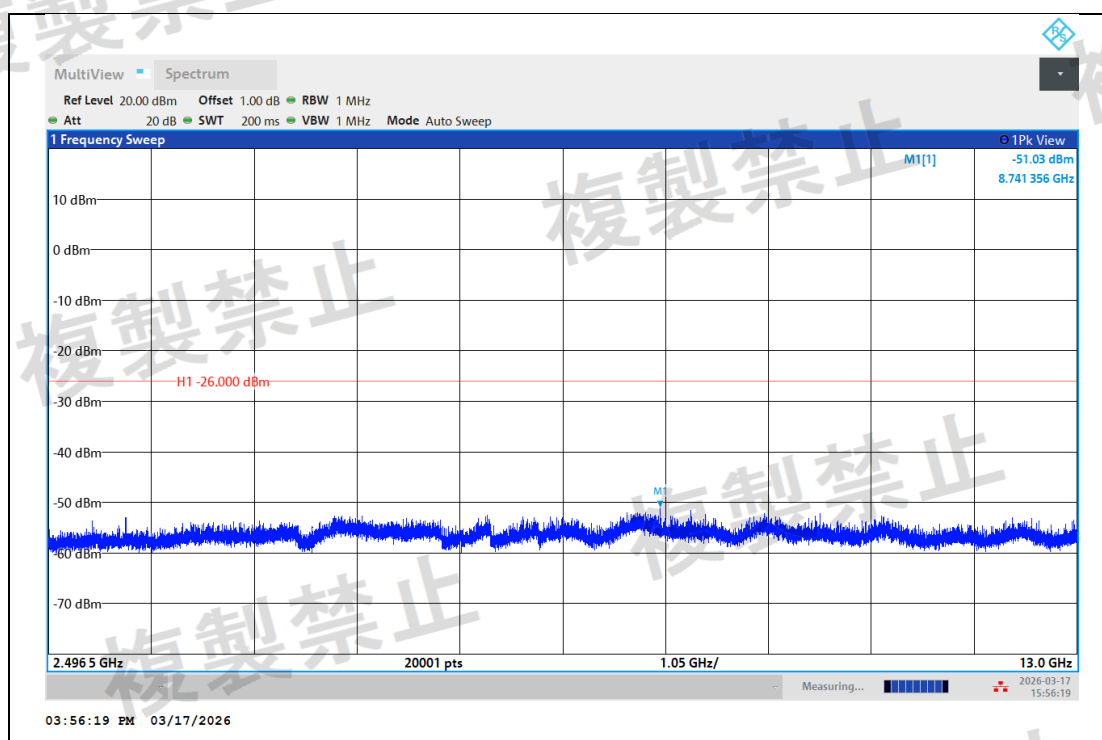


NTNV-3DH5-Ant1-2441-2496.5~13000-PASS

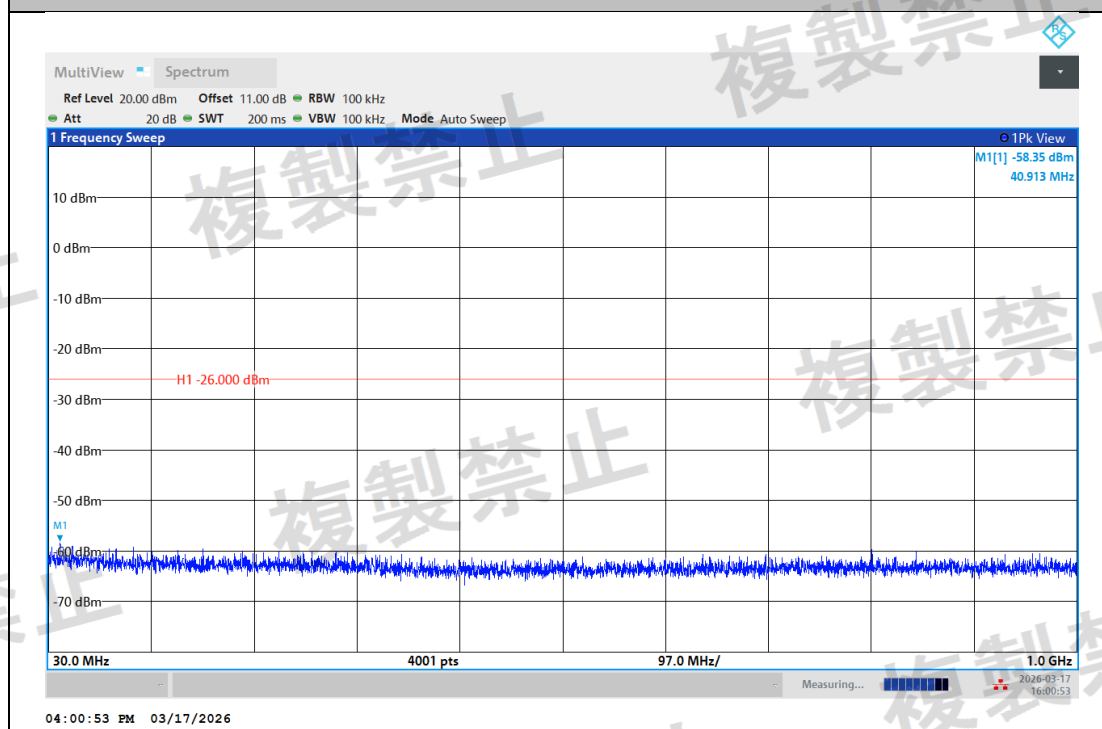


NTNV-3DH5-Ant1-2480-30~1000-PASS

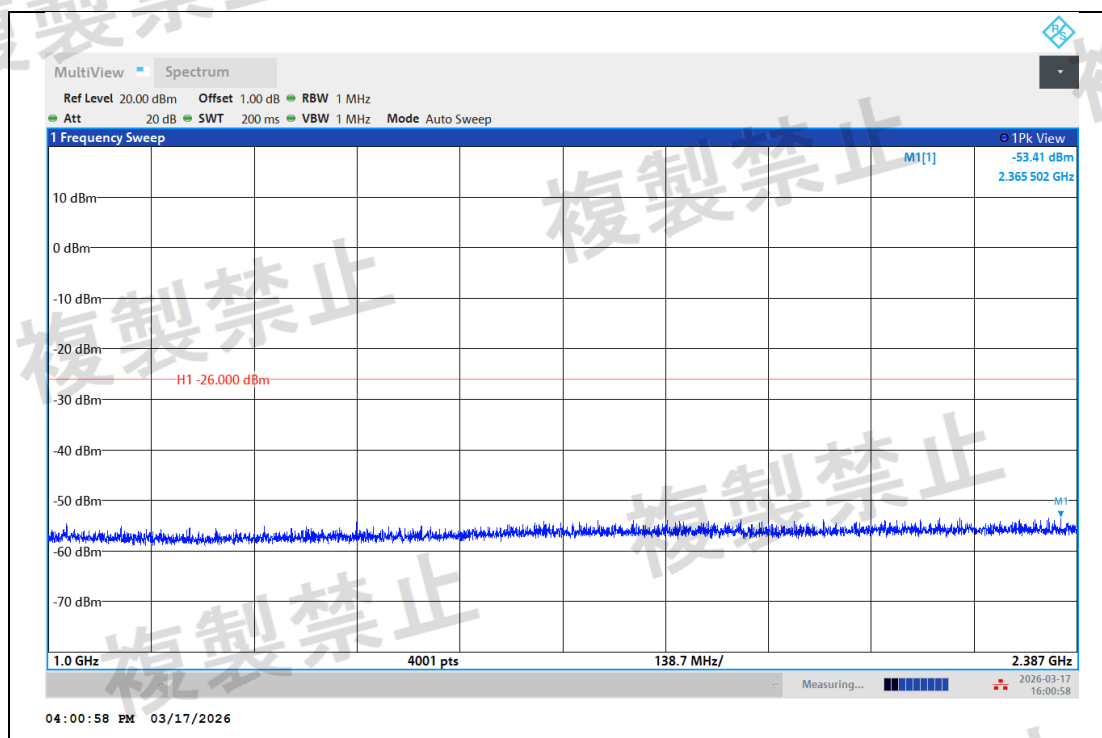


NTVN-3DH5-Ant1-2480-1000~2387-PASS

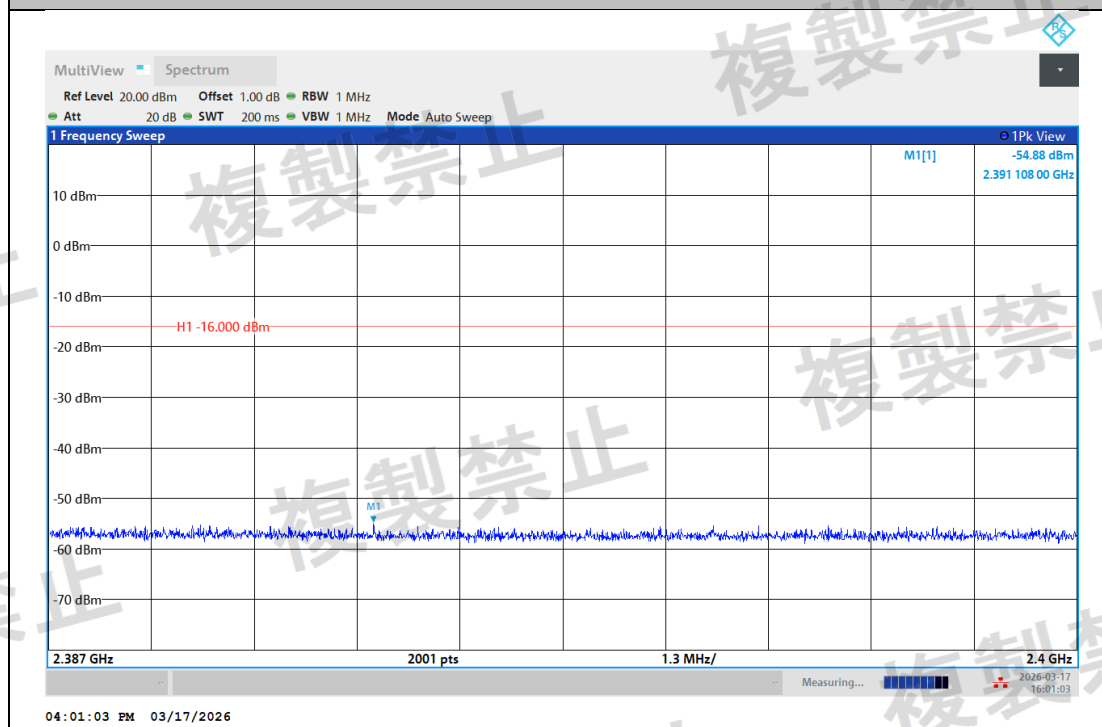

NTVN-3DH5-Ant1-2480-2387~2400-PASS

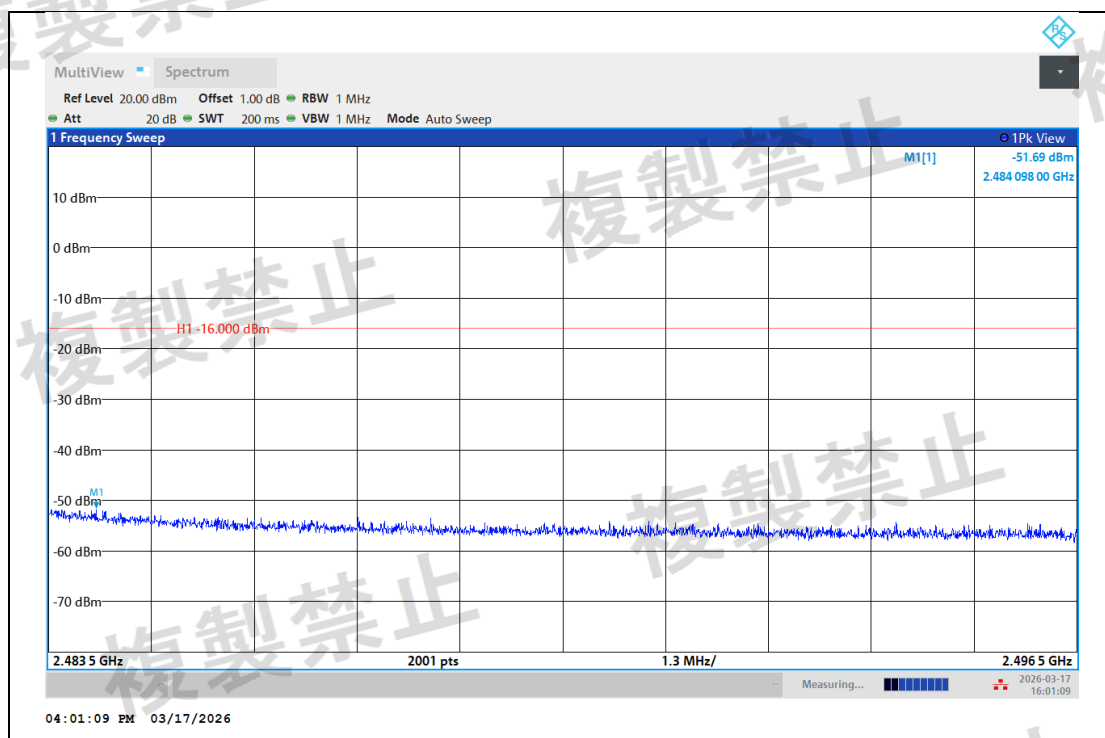



NTNV-3DH5-Ant1-2480-2483.5~2496.5-PASS

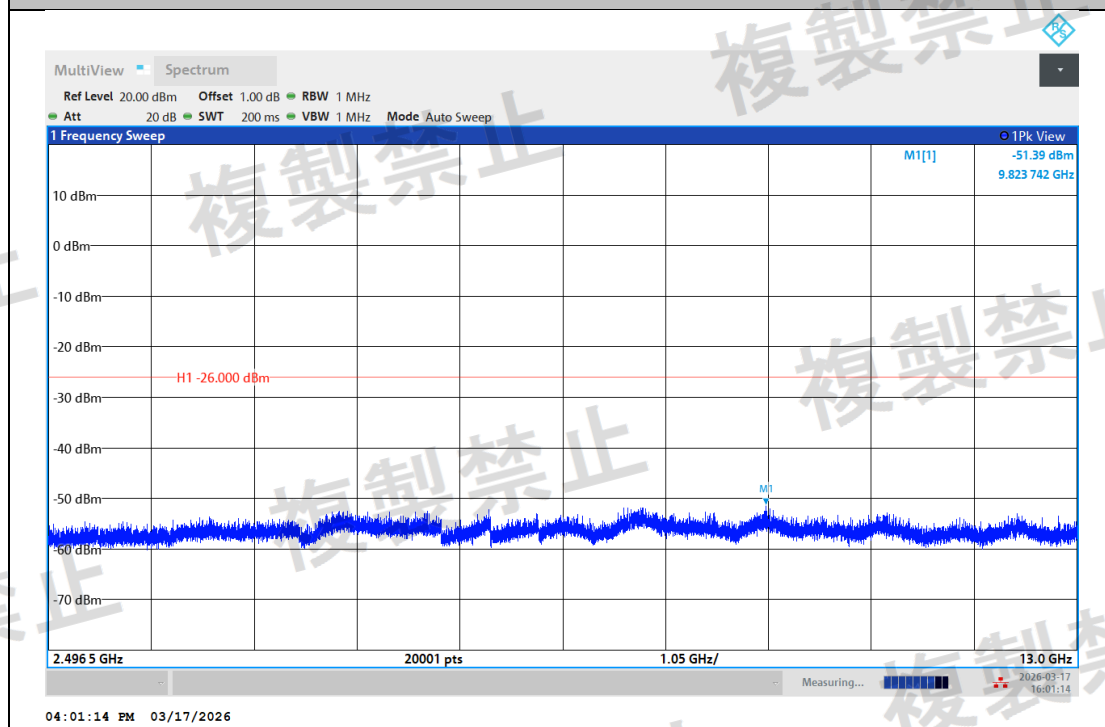


NTNV-3DH5-Ant1-2480-2496.5~13000-PASS

Test Graphs_Step2

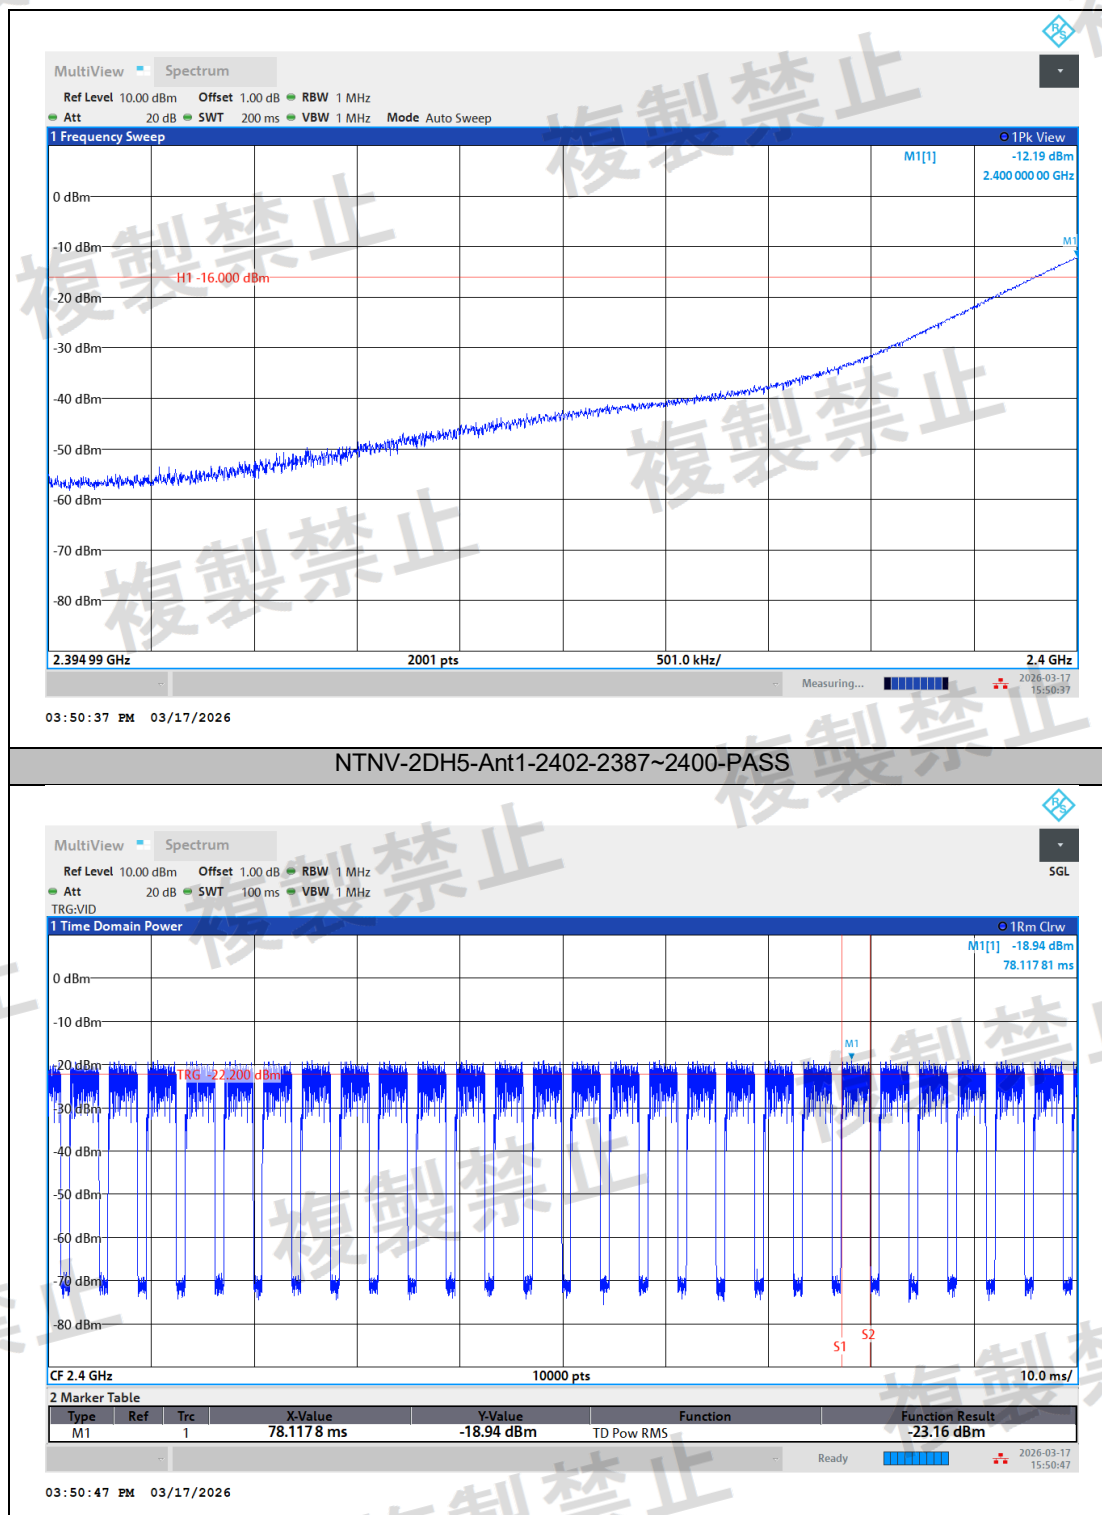

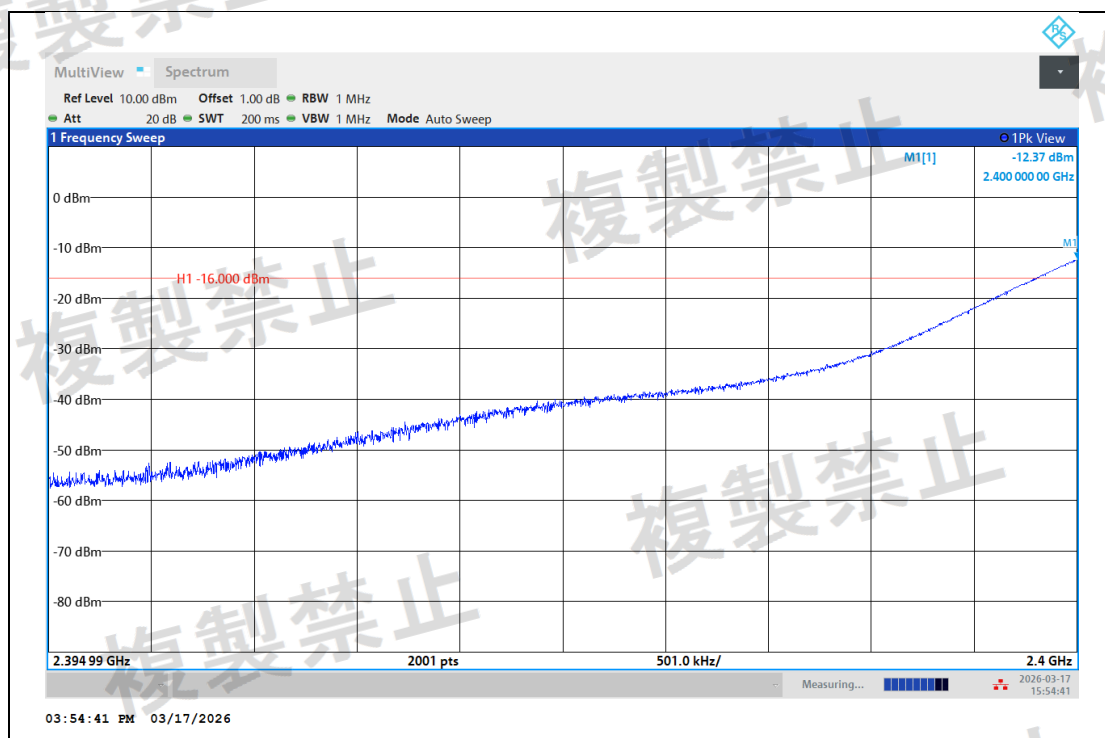

NTNV-3DH5-Ant1-2402-2387~2400-PASS


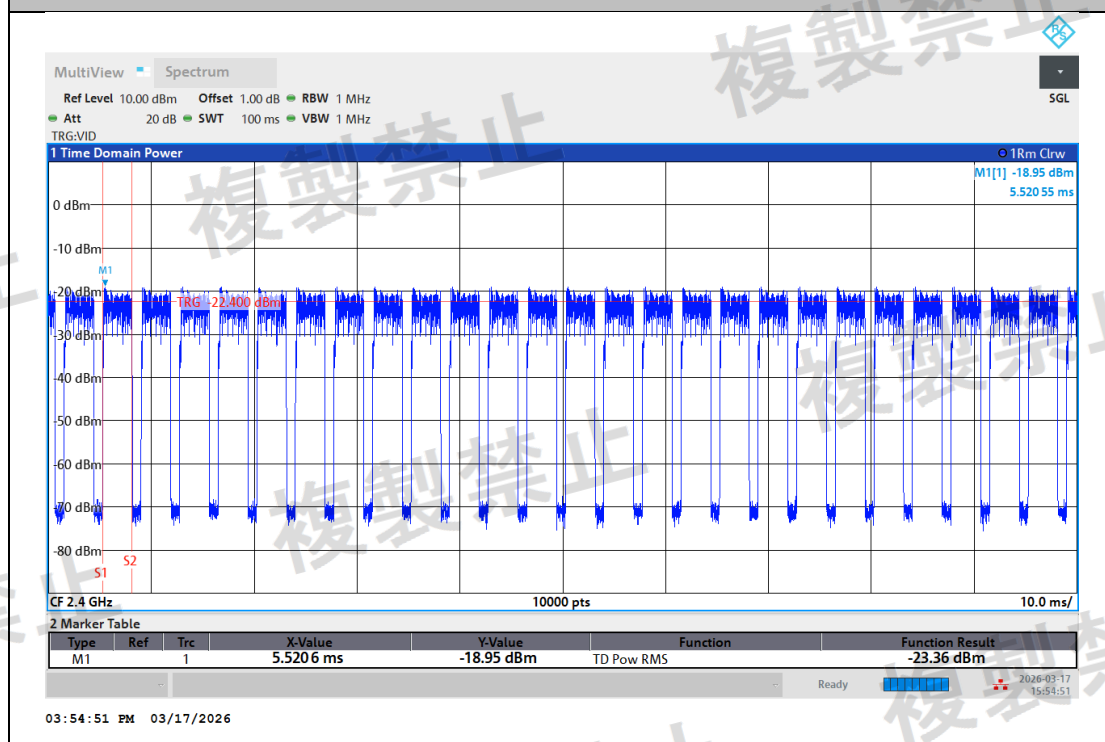



APPENDIX F: RECEIVER SPURIOUS EMISSIONS

Test Result


Test Condition	Test Mode	Antenna	Frequency [MHz]	Freq. Range [MHz]	Freq. [MHz]	Result [dBm]	Limit [dBm]	Result [nW]	Limit [nW]	Verdict
NTNV	DH5	Ant1	2402	30~1000	114.11	-88.98	≤-54	0.00126	≤4	PASS
NTNV	DH5	Ant1	2402	1000~12500	8514.01	-73.75	≤-47	0.04217	≤20	PASS
NTNV	DH5	Ant1	2441	30~1000	52.06	-88.41	≤-54	0.00144	≤4	PASS
NTNV	DH5	Ant1	2441	1000~12500	8550.81	-73.86	≤-47	0.04111	≤20	PASS
NTNV	DH5	Ant1	2480	30~1000	37.51	-88.65	≤-54	0.00136	≤4	PASS
NTNV	DH5	Ant1	2480	1000~12500	8540.46	-73.82	≤-47	0.04150	≤20	PASS
NTNV	2DH5	Ant1	2402	30~1000	36.06	-88.28	≤-54	0.00149	≤4	PASS
NTNV	2DH5	Ant1	2402	1000~12500	8511.14	-73.77	≤-47	0.04198	≤20	PASS
NTNV	2DH5	Ant1	2441	30~1000	292.98	-88.05	≤-54	0.00157	≤4	PASS
NTNV	2DH5	Ant1	2441	1000~12500	10954.19	-74.34	≤-47	0.03681	≤20	PASS
NTNV	2DH5	Ant1	2480	30~1000	250.81	-88.29	≤-54	0.00148	≤4	PASS
NTNV	2DH5	Ant1	2480	1000~12500	8606.01	-74.20	≤-47	0.03802	≤20	PASS
NTNV	3DH5	Ant1	2402	30~1000	193.61	-89.08	≤-54	0.00124	≤4	PASS
NTNV	3DH5	Ant1	2402	1000~12500	8510.56	-73.68	≤-47	0.04285	≤20	PASS
NTNV	3DH5	Ant1	2441	30~1000	382.18	-88.81	≤-54	0.00132	≤4	PASS
NTNV	3DH5	Ant1	2441	1000~12500	8554.83	-74.01	≤-47	0.03972	≤20	PASS
NTNV	3DH5	Ant1	2480	30~1000	39.94	-89.01	≤-54	0.00126	≤4	PASS
NTNV	3DH5	Ant1	2480	1000~12500	9743.88	-73.77	≤-47	0.04198	≤20	PASS

Test Graphs

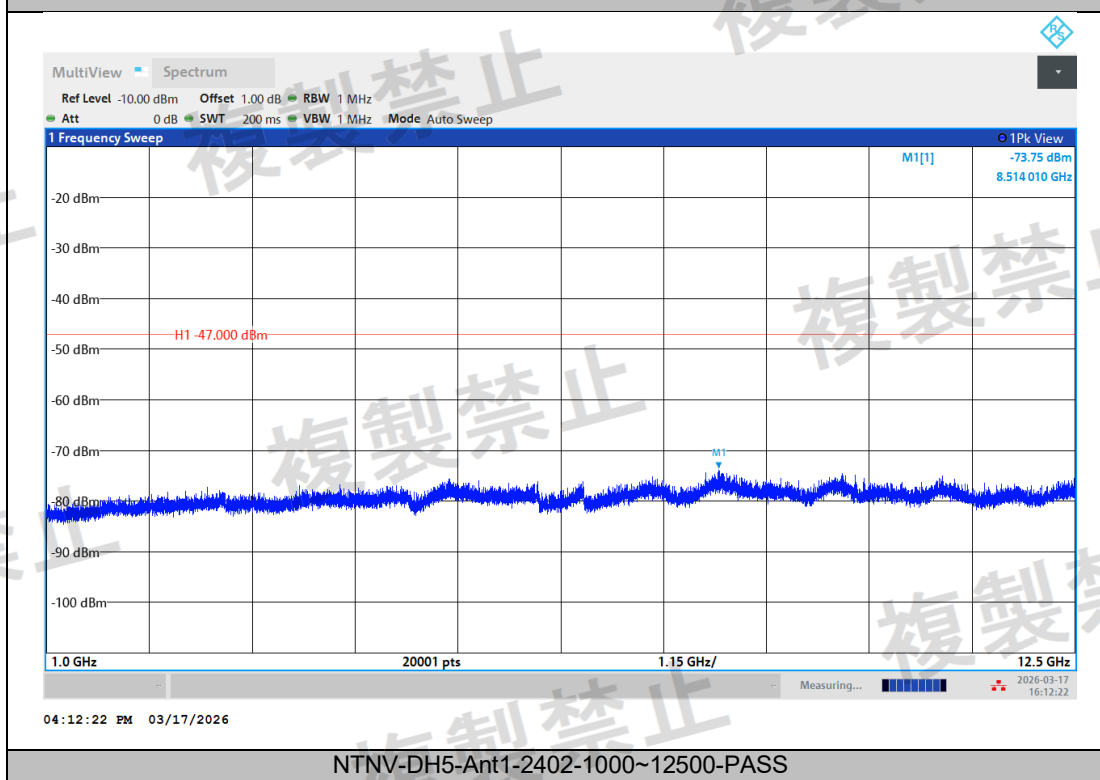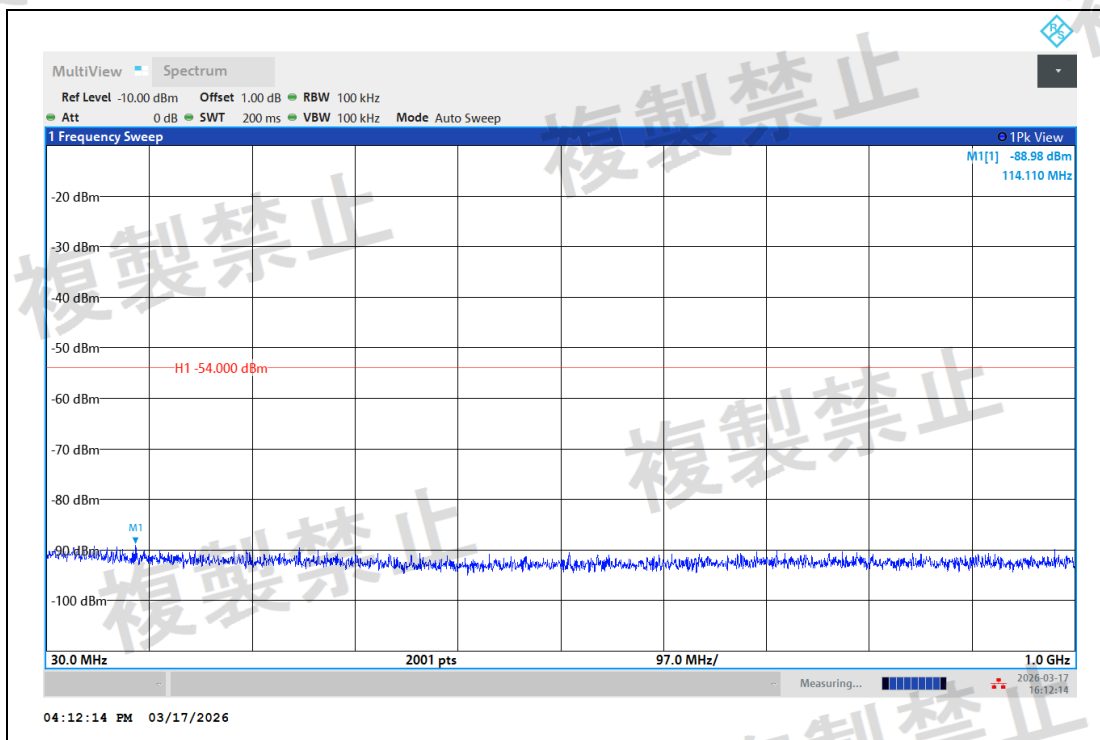


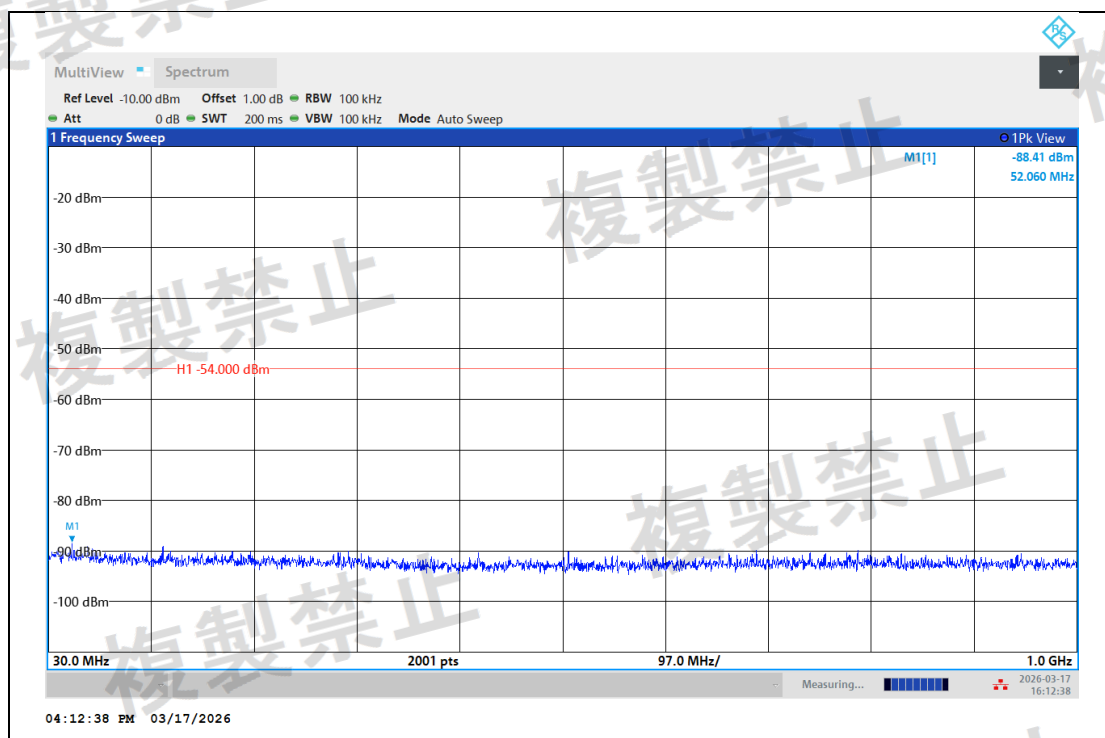


NTNV-DH5-Ant1-2441-30~1000-PASS

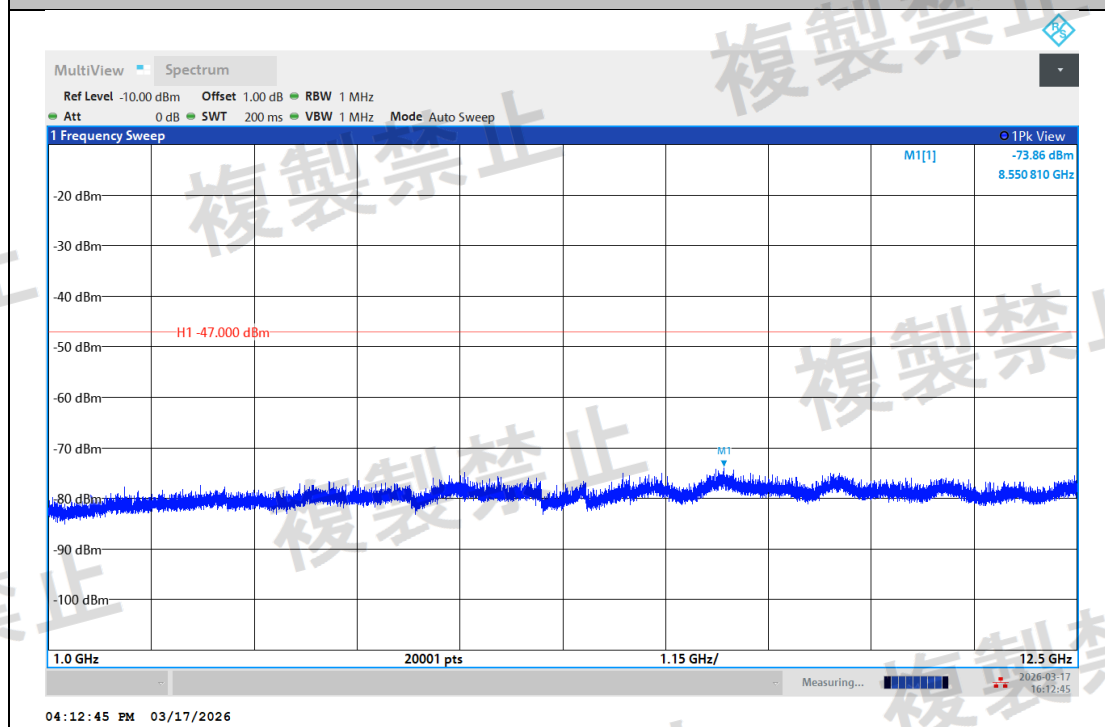


NTNV-DH5-Ant1-2441-1000~12500-PASS

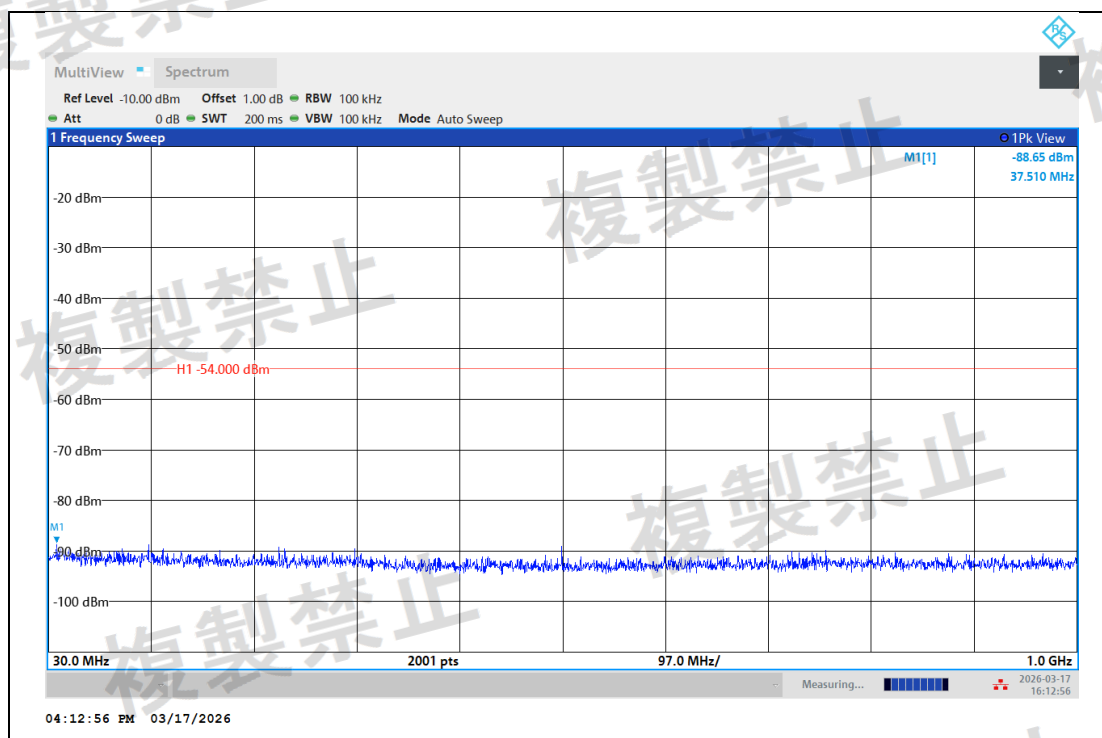


NTNV-DH5-Ant1-2480-30~1000-PASS

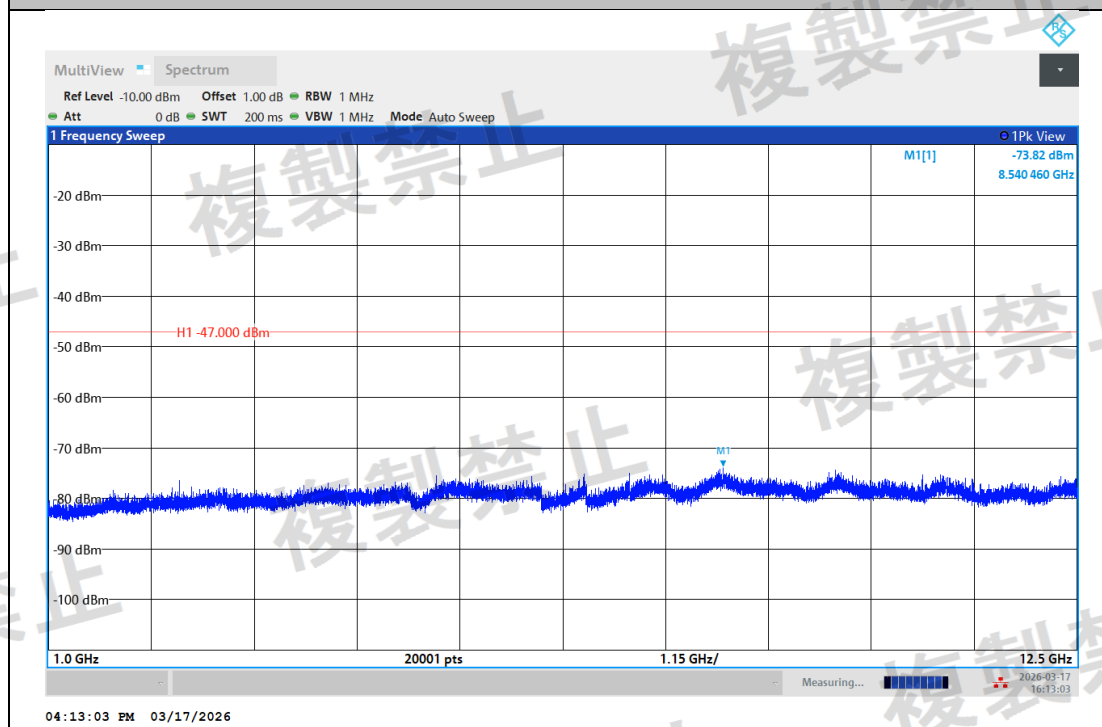


NTNV-DH5-Ant1-2480-1000~12500-PASS

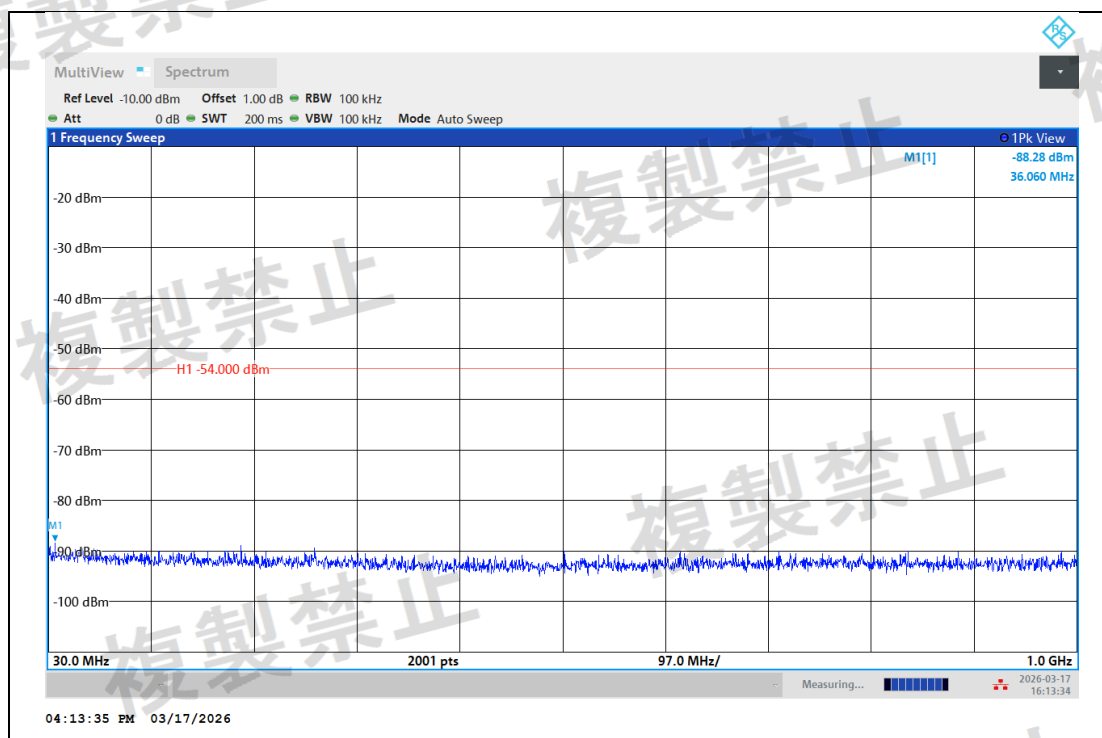


NTNV-2DH5-Ant1-2402-30~1000-PASS

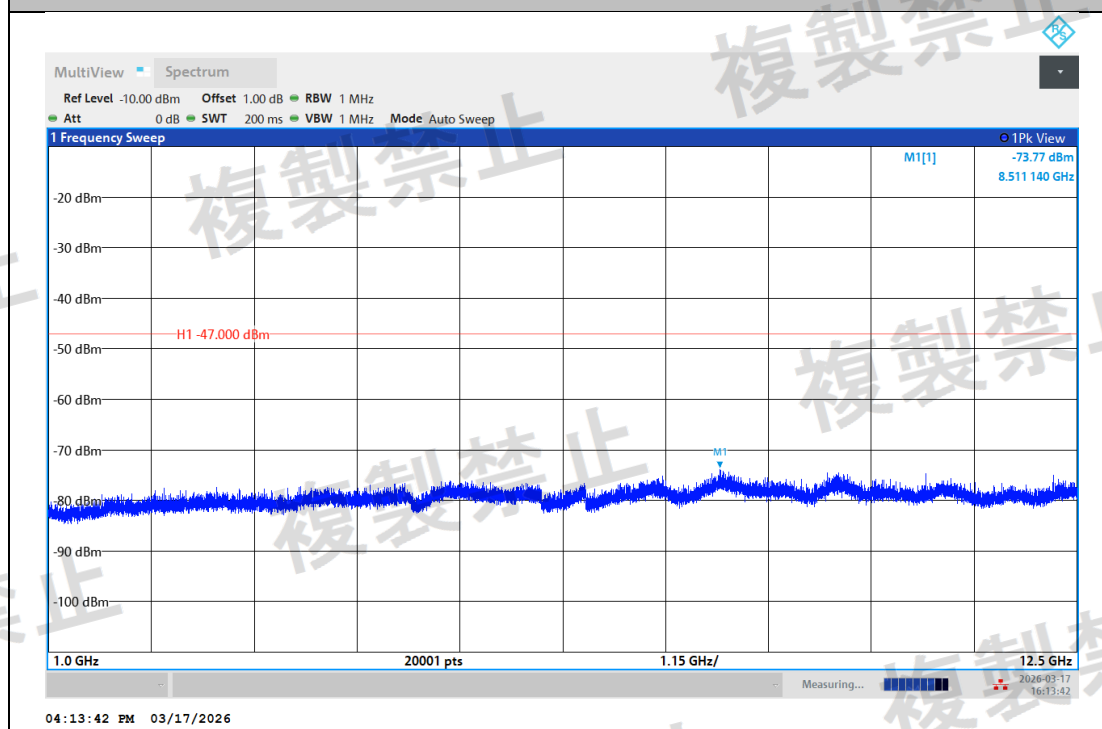


NTNV-2DH5-Ant1-2402-1000~12500-PASS

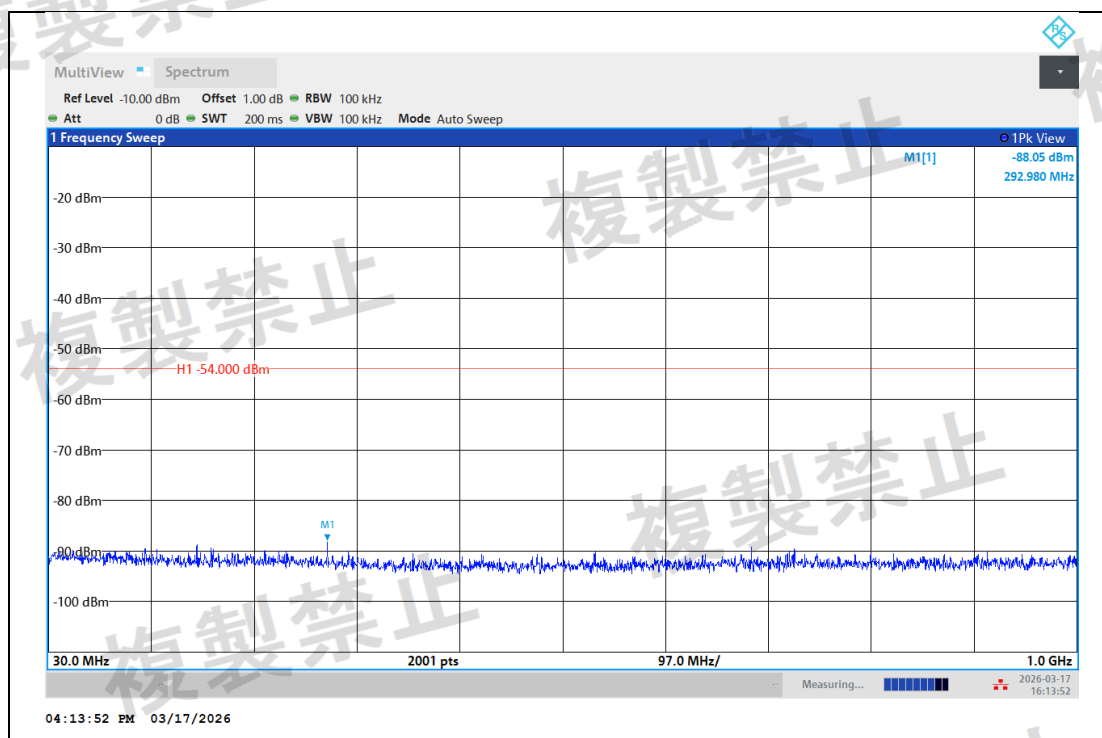


NTNV-2DH5-Ant1-2441-30~1000-PASS

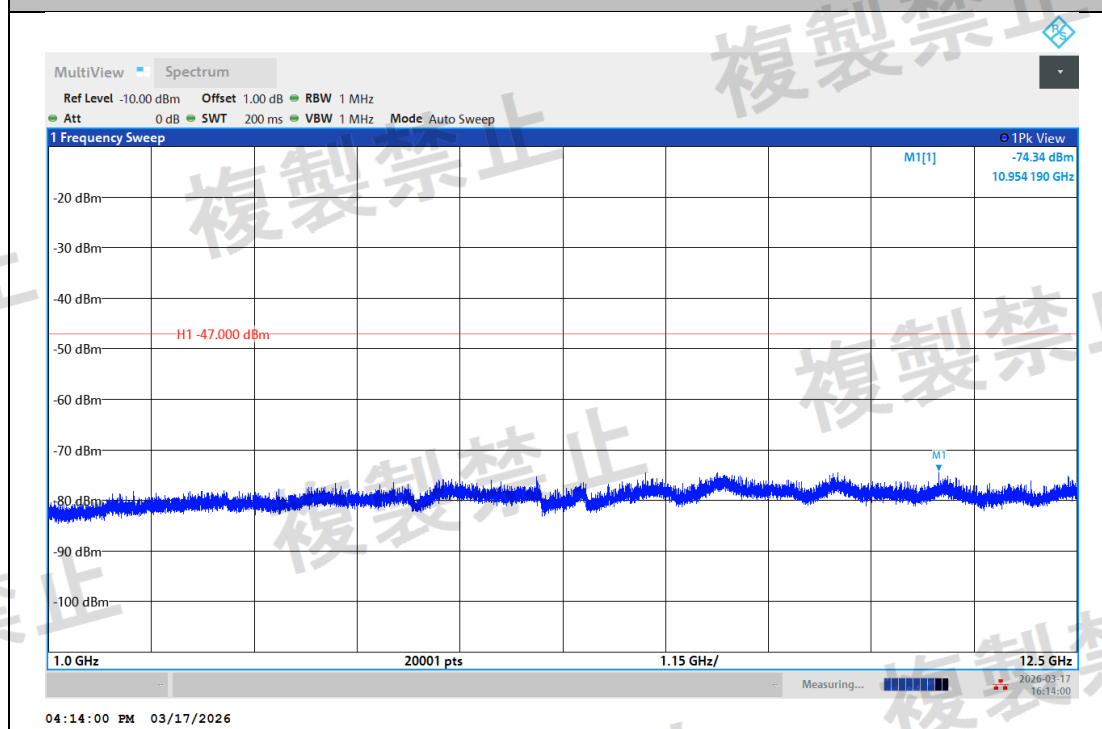


NTNV-2DH5-Ant1-2441-1000~12500-PASS

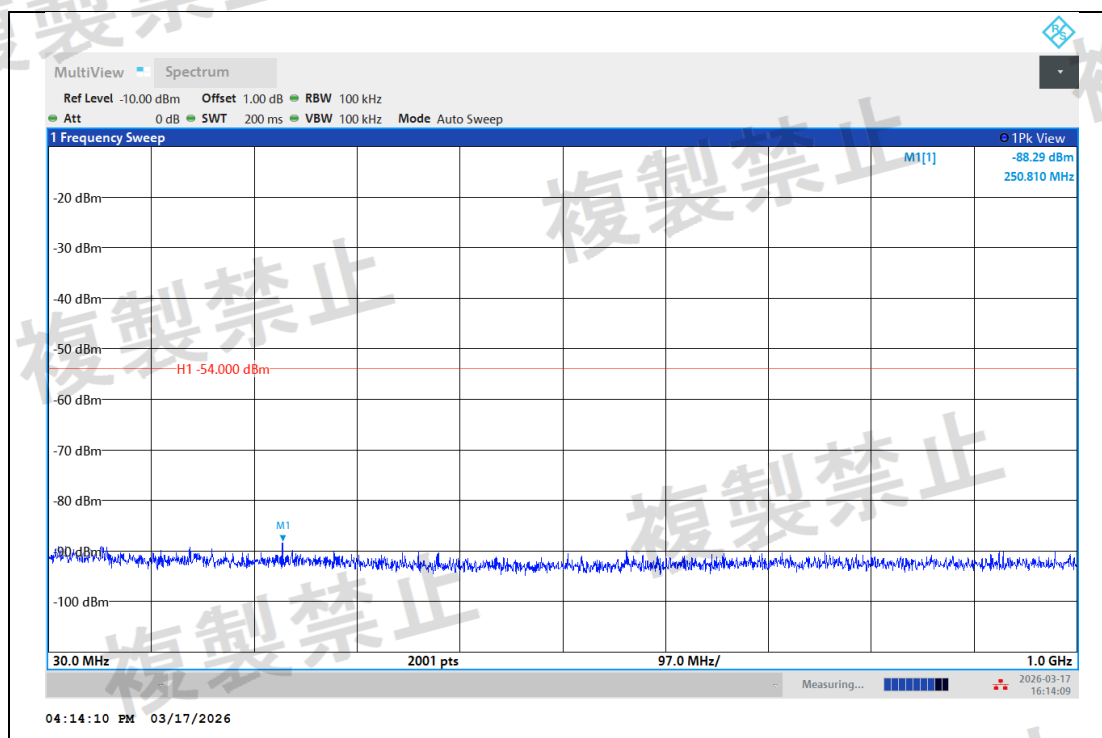


NTNV-2DH5-Ant1-2480-30~1000-PASS

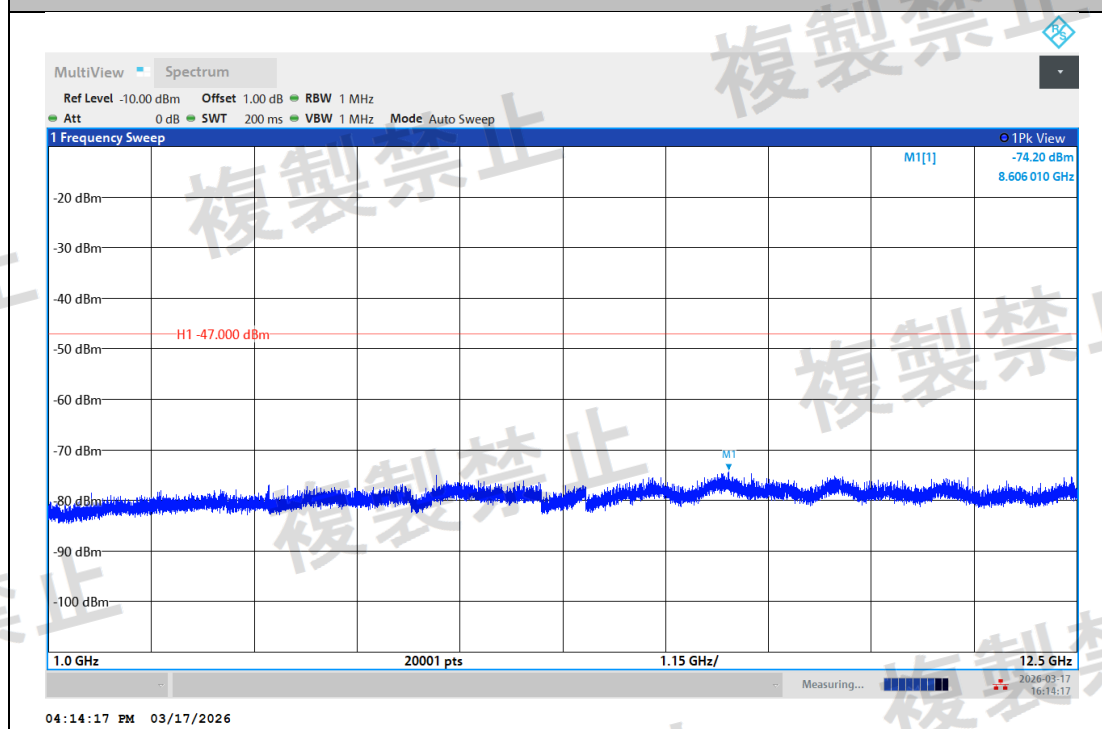


NTNV-2DH5-Ant1-2480-1000~12500-PASS

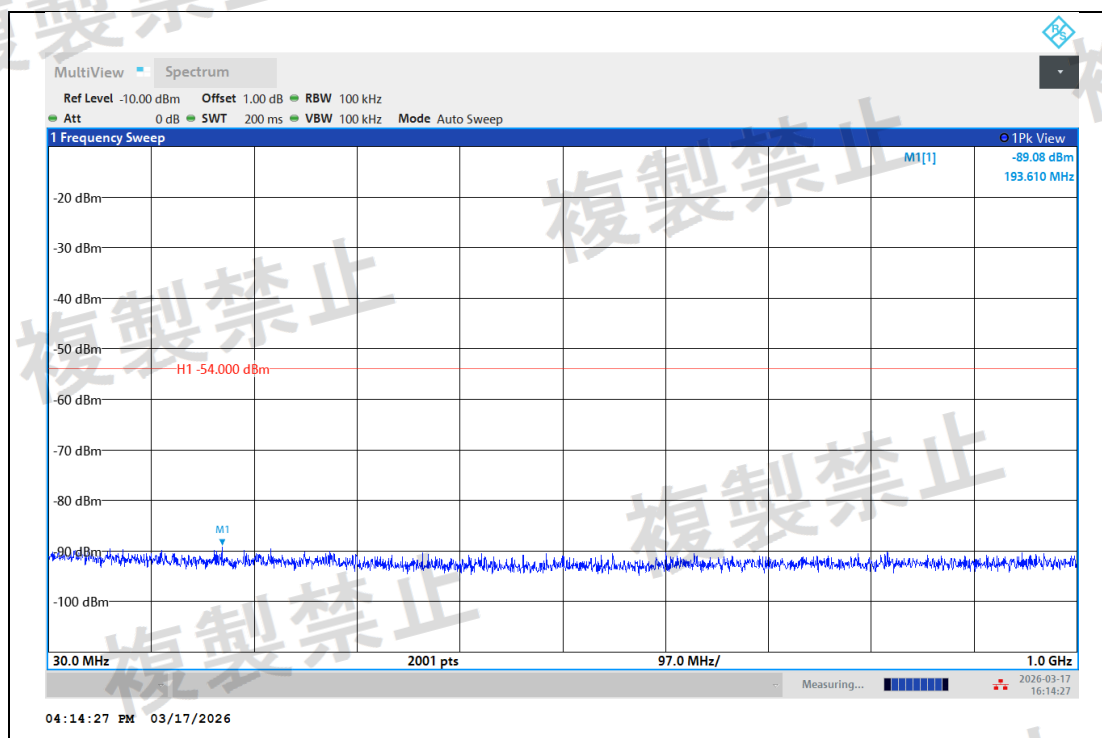


NTNV-3DH5-Ant1-2402-30~1000-PASS

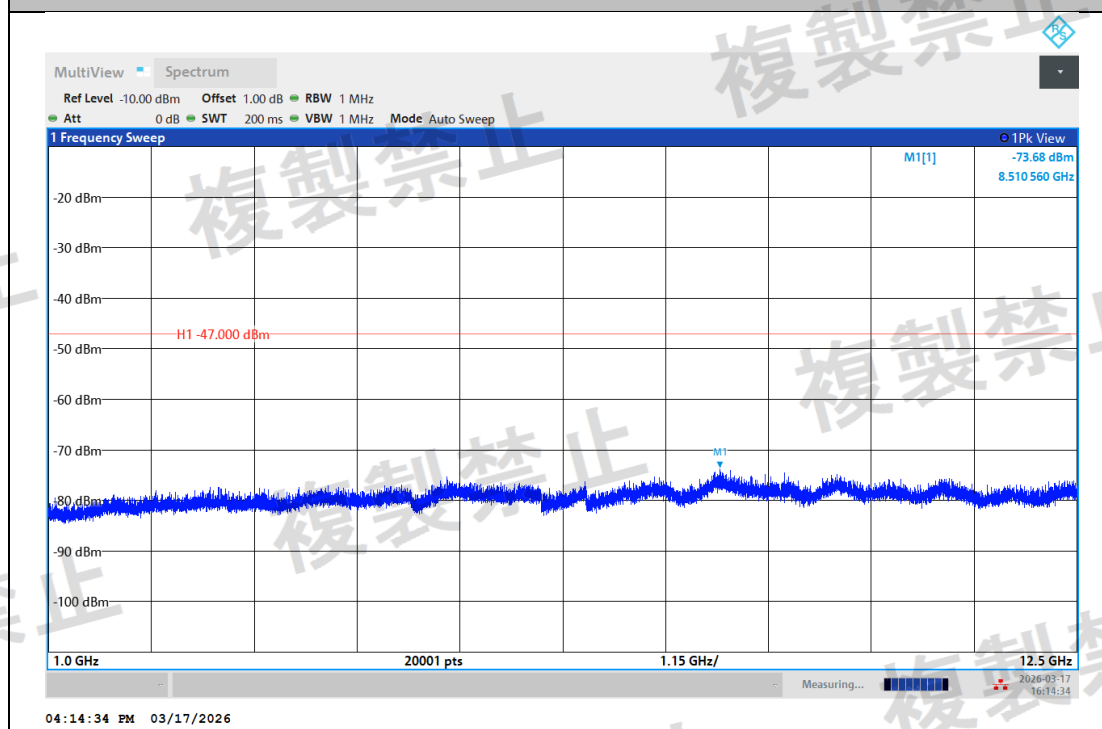


NTNV-3DH5-Ant1-2402-1000~12500-PASS

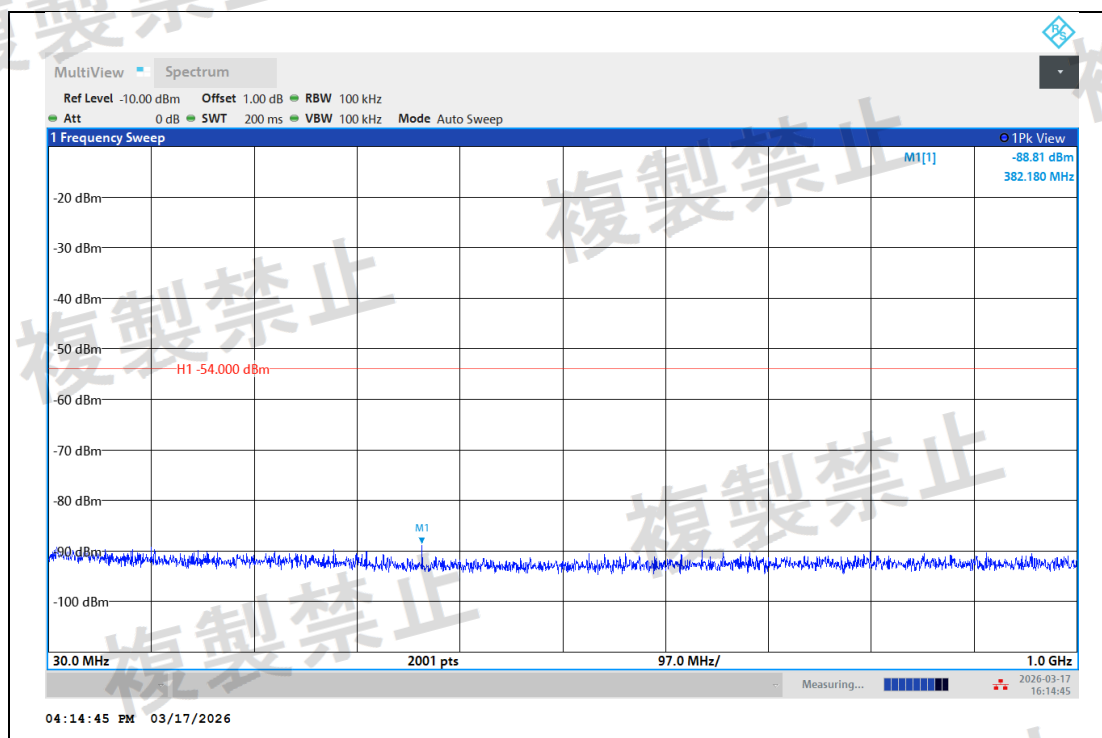


NTNV-3DH5-Ant1-2441-30~1000-PASS

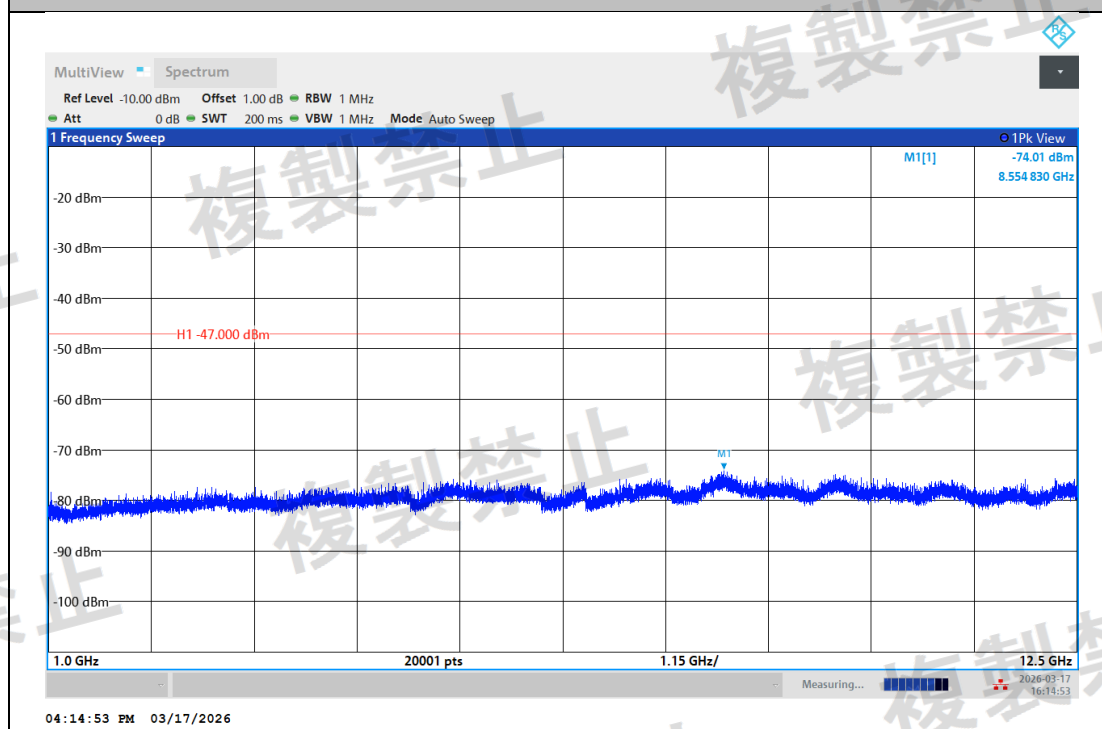

NTNV-3DH5-Ant1-2441-1000~12500-PASS

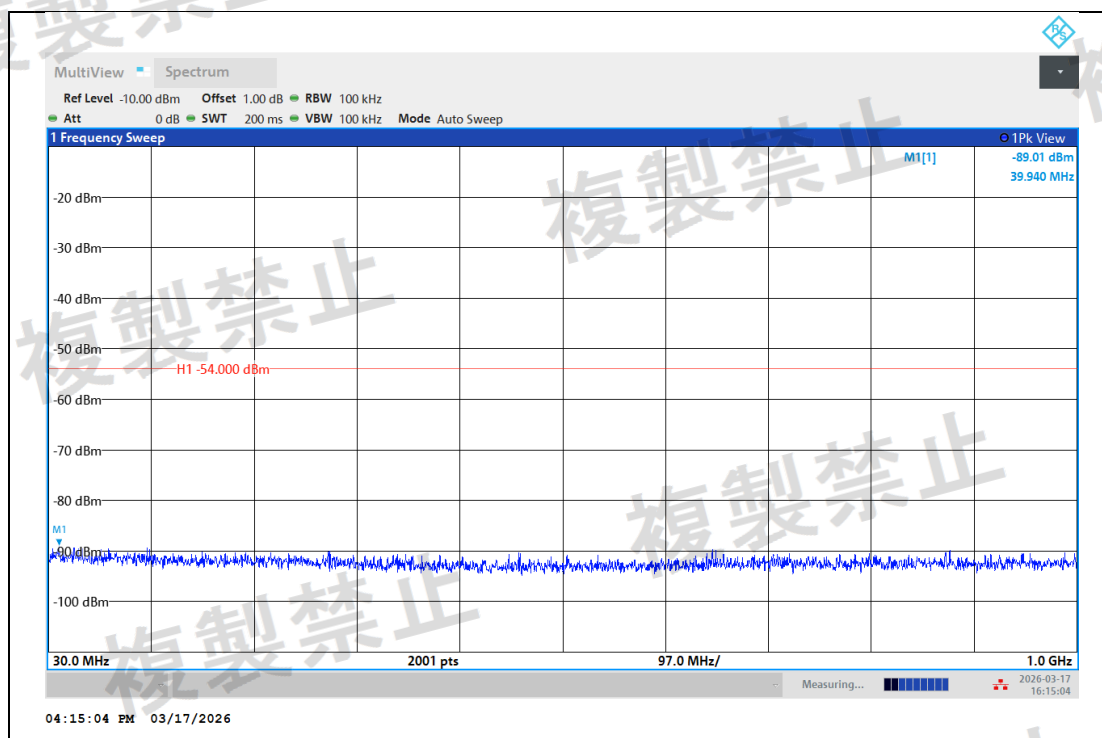

NTNV-3DH5-Ant1-2480-30~1000-PASS

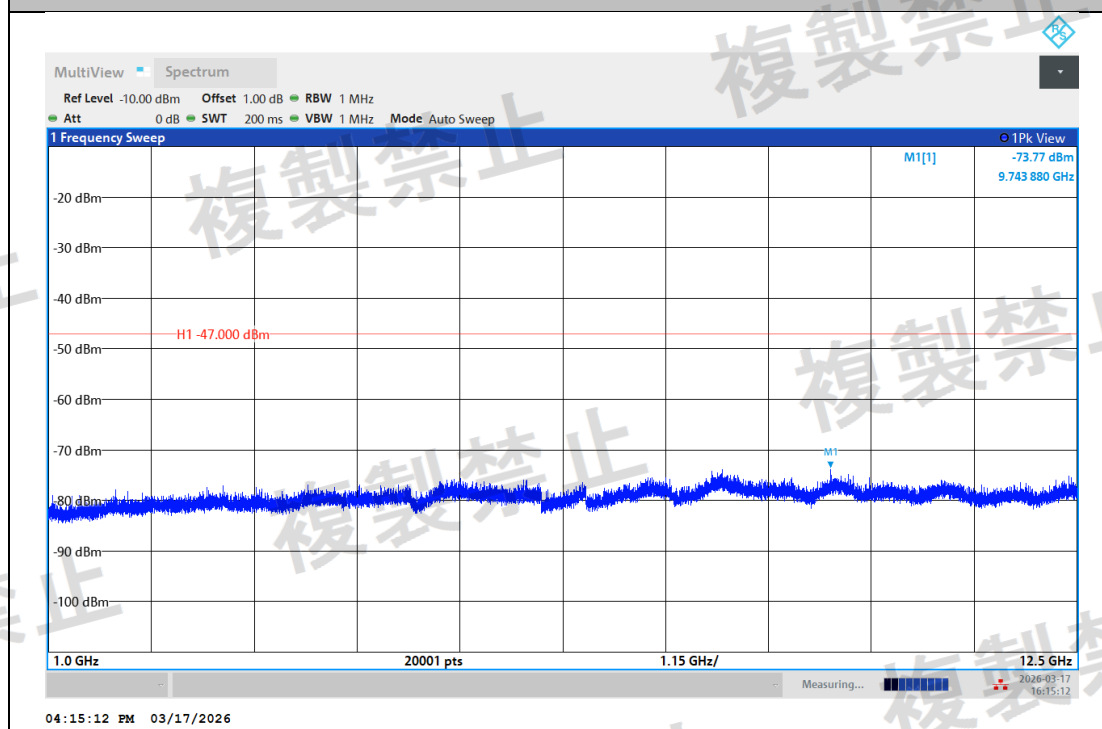

NTNV-3DH5-Ant1-2480-1000~12500-PASS

APPENDIX G: INTERFERENCE PREVENTION FUNCTION

Test Item	:	Interference Prevention Function Measurement
Test Site	:	TR8
Test Mode	:	Mode: Normal Mode
EUT MAC Address	:	70:21:7F:18:D4:08
		

The End

Setup Photographs

