



Test Report

Application No.: DNT2603240602R01566-03376
Applicant: SONiX Technology Co., Ltd.
Address of Applicant: 10F-1.,No.36, Taiyuan St.,Zhubei City,Hsinchu County
302,Taiwan(R.O.C)
EUT Description: 5G RF module
Model No.: S2022EU3
Additional Model: /
Trade Mark: /
Standards: Article 2 Paragraph 1 of Item 72
MT72: 無人移動体画像伝送システムの特性試験方法
Date of Receipt: 2026/03/24
Date of Test: 2026/03/24 to 2026/07/13
Date of Issue: 2026/07/13
Test Result: **PASS**

Prepared By: Carl Lin (Testing Engineer)

Reviewed By: Wayne Lin (Project Engineer)

Approved By: Hense Shan (Manager)



Note: If there is any objection to the results in this report, please submit a written inquiry to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp, and is issued by the company in accordance with the requirements of the "Conditions of Issuance of Test Reports" printed in the attached page. Unless otherwise stated, the results presented in this report only apply to the samples tested this time. Partial reproduction of this report is not allowed unless approved by the company in writing.

Guangdong DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang 'an Town, Dongguan City, Guangdong P.R.China

Web: www.dn-testing.com

Tel: +86-769-88087383

E-mail: service@dn-testing.com



Report No.:DNT2603240602R01566-03376

Date: July 13, 2026

Page: 2 / 215

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	July 13, 2026	Valid	Original Report

Guangdong DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang 'an Town, Dongguan City, Guangdong P.R.China

Web: www.dn-testing.com

Tel: +86-769-88087383

E-mail: service@dn-testing.com



Contents

1 TEST SUMMARY	4
2 GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 DESCRIPTION OF SUPPORT UNITS	6
2.3 TEST LOCATION	6
2.4 CHANNEL LIST	6
2.5 TEST ENVIRONMENT AND MODE	7
2.6 POWER SETTING OF TEST SOFTWARE	7
2.7 MEASUREMENT UNCERTAINTY	7
2.8 ASSISTANT EQUIPMENT USED FOR TEST	7
2.9 INSTRUMENTS USED DURING TEST	7
3 TEST RESULTS	9
3.1 E.U.T. TEST CONDITIONS	9
3.2 ANTENNA REQUIREMENT	10
3.3 INTERFERENCE PREVENTION FUNCTION	11
3.4 RF ACCESSIBILITY	12
3.5 FREQUENCY TOLERANCE	13
3.6 OUTPUT POWER AND TOLERANCE	17
3.7 OCCUPIED BANDWIDTH	18
3.8 ADJACENT CHANNEL LEAKAGE POWER	19
3.9 UNWANTED EMISSION STRENGTH	20
3.10 SECONDARY RADIATED EMISSION STRENGTH	21
4 APPENDIX	22
APPENDIX A: FREQUENCY TOLERANCE	22
APPENDIX B: OUTPUT POWER AND TOLERANCE	92
APPENDIX C: OCCUPIED BANDWIDTH	96
APPENDIX D: ADJACENT CHANNEL LEAKAGE POWER	110
APPENDIX E: UNWANTED EMISSION STRENGTH	126
APPENDIX F: SECONDARY RADIATED EMISSION STRENGTH	190



1 Test Summary

Items	Test Result
Frequency range	PASS
Frequency Tolerance	PASS
Output Power and Tolerance	PASS
Occupied Bandwidth	PASS
Adjacent Channel Leakage Power	PASS
Unwanted emission strength	PASS
Secondary Radiated Emission strength	PASS
Isotropic Antenna Gain	PASS

Remark:

EUT: In this whole report EUT means Equipment Under Test.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radio Frequency.



2 General Information

2.1 General Description of EUT

Manufacturer:	Shenzhen Bilian Electronic Co.,Ltd.		
Address of Manufacture:	Room 501, Building 3, No. 32, Dafu Road, Zhangge Community, Fucheng Street, Longhua District, Shenzhen City		
Factory:	Dingnan country Fulong Technology Co.,Ltd.		
Address of Factory:	Yingtang industry park, Qinghua Blvd Liangfu industry district, Lishi town, Dingnan, GanZhou, JiangXi province.		
Product Name:	5G RF module		
Model No.:	S2022EU3		
Additional Model:	/		
Trade Mark:	/		
Hardware Version:	V1.0		
Software Version:	V1.0		
Operation Frequency:	10MHz: 5655MHz ~ 5750MHz 20MHz: 5660MHz ~ 5745MHz		
Modulation Technique:	OFDM		
Type of Modulation:	OFDM (BPSK,QPSK,16QAM,64QAM,256QAM)		
Channel Separation:	10MHz system:	10MHz	
	20MHz system:	20MHz	
Antenna Type:	☒ External, ☐ Integrated		
Antenna Gain*:	ANT1/ANT2:3.32dBi		
RF Cable*:	☒ Provided by client		
	0.5dB(0.6~1GHz)	0.8dB(1.4~2GHz)	1.0dB(2.1~2.7GHz)
	1.5dB(3~4GHz)	1.8dB(4.4~6GHz)	
Declared antenna power:	10MHz: 200mW 20MHz: 200mW		
Power Supply:	DC 5V		
Note: *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, DNT is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.			



2.2 Description of Support Units

The EUT has been tested independently.

2.3 Test Location

Company:	Guangdong DN Testing Co., Ltd
Address:	No. 1, West Fourth Street, South Xinfu Road, Wusha Liwu, Chang 'an Town, Dongguan City, Guangdong P.R.China
Test engineer:	Gali Lin

Remark : Our test report is under the quality assurance system according to ISO17025.

- **FCC, USA**

Designation Number: CN1348

- **A2LA (Certificate No. 7050.01)**

GUANG DONG DN TESTING CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 7050.01.

- **Innovation, Science and Economic Development Canada**

GUANG DONG DN TESTING CO., LTD. EMC Laboratory has been recognized by ISED as an accredited testing laboratory. CAB identifier is CN0149.

IC#: 30755.

2.4 Channel List

Band	Bandwidth	Channel	Frequency (MHz)
5.7GHz	10MHz	131	5655
		133	5665
		135	5675
		137	5685
		139	5695
		141	5705
		143	5715
		145	5725
		148	5740
		150	5750
	20MHz	132	5660
		136	5680
		140	5700
		144	5720
		149	5745

Guangdong DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang 'an Town, Dongguan City, Guangdong P.R.China

Web: www.dn-testing.com

Tel: +86-769-88087383

E-mail: service@dn-testing.com



2.5 Test Environment and Mode

Operating Environment:	
Temperature:	23.8 °C
Humidity:	56 % RH
Atmospheric Pressure:	101.0~101.30 KPa
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.

2.6 Power Setting of Test Software

Bandwidth	Channel	Frequency (MHz)	Software name	Set value
10MHz	131	5655	ADB	default
	139	5695		default
	150	5750		default
20MHz	132	5660	MPTOOL	default
	140	5700		default
	149	5745		default

2.7 Measurement Uncertainty

No.	Parameter	Measurement Uncertainty
1	Radio Frequency	$< \pm 1 \times 10^{-5}$
2	Total RF power, conducted	$< \pm 1.5 \text{ dB}$
3	RF power density, conducted	$< \pm 3 \text{ dB}$
4	Spurious emissions, conducted	$< \pm 3 \text{ dB}$
5	All emissions, radiated	$< \pm 6 \text{ dB}$ (30MHz -1GHz) $< \pm 6 \text{ dB}$ (above 1GHz)
6	Temperature	$< \pm 1^{\circ}\text{C}$
7	Humidity	$< \pm 5 \%$
8	DC and low frequency voltages	$< \pm 3 \%$

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2.8 Assistant equipment used for test

Code	Equipment	Manufacturer	Model No.	Equipment No.
1	Computer	acer	N22C8	EMC notebook01



2.9 Instruments Used during Test

For Connect EUT Antenna Terminal Test						
Description	Manufacturer	Model	Serial Number	Cal date	Due date	correcting mechanism
Signal Generator	Keysight	N5181A-6G	MY48180415	2025-10-21	2026-10-20	Dongguan DN Testing Co.,Ltd.
Signal Generator	Keysight	N5182B	MY57300617	2025-10-21	2026-10-20	Dongguan DN Testing Co.,Ltd.
Power supply	Keysight	E3640A	ZB2022656	2025-10-21	2026-10-20	Dongguan DN Testing Co.,Ltd.
Radio Communication Tester	R&S	CMW500	105082	2025-10-21	2026-10-20	Dongguan DN Testing Co.,Ltd.
Spectrum Analyzer	Aglient	N9010A	MY52221458	2025-10-21	2026-10-20	Dongguan DN Testing Co.,Ltd.
BT/WIFI Test Software	Tonscend	JS1120 V3.1.83	NA	NA	NA	NA
RF Control Unit	Tonscend	JS0806-2	22F8060581	NA	NA	NA
Power Sensor	Anritsu	ML2495A	2129005	2025-10-21	2026-10-20	Dongguan DN Testing Co.,Ltd.
Pulse Power Sensor	Anritsu	MA2411B	1911397	2025-10-21	2026-10-20	Dongguan DN Testing Co.,Ltd.
temperature and humidity box	SCOTEK	SCD-C40-80PRO	6866682020008	2025-10-21	2026-10-20	Dongguan DN Testing Co.,Ltd.
Voltmetre	FLUKE	F15B PRO	59755315WS	2025-10-21	2026-10-20	Dongguan DN Testing Co.,Ltd.
5T vibration	SuShi	DC-5000-50	231510061	2025-12-25	2026-12-24	Dongguan DN Testing Co.,Ltd.

Note:

1. Calibration by the calibration agencies listed in the table correspond to paragraph 4 (ii) (c) of Article 24-2 in the Radio Law.

☐ (a) Calibration conducted by the National Institute of Information and Communications Technology (NICT) or a designated calibration agency under Article 102-18-1 of the Radio Act.

☐ (b) Calibration conducted based on the regulations of Article 135 or 144 of the Measurement Act.

☒ (c) Calibration conducted in foreign countries, which is equivalent to calibration conducted by the NICT or a designated calibration agency under Article 102-18-1 of the Radio Act.

☐ (d) Calibration, etc. conducted by using measuring instruments and other facilities listed at the bottom of appended table 3 of the Radio Act, which is to have been calibrated as described in (a) through (c) above.

Guangdong DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang 'an Town, Dongguan City, Guangdong P.R.China

Web: www.dn-testing.com

Tel: +86-769-88087383

E-mail: service@dn-testing.com



3 Test Results

3.1 E.U.T. test conditions

Power Supply:	DC 5V			
	During the input supply voltage to the EUT from the external power source is varied by +/-10%, the fluctuation of input voltage to the circuit of RF unit of test equipment is less than $\pm 1\%$. so all test performed at normal voltage only.			
	The measurement result of the voltage fluctuation at RF circuit when DC 5V +/- 10%.			
	DC Input		input voltage to the circuit	Deviation
	High Voltage	5.5V	3.3V	0%
	Normal Voltage	5V	3.3V	0%
Test Frequencies:	Low Voltage	4.5V	3.3V	0%
	If the EUT can be set to 3 of more different (carrier) frequencies in 1 allocated band, testing shall be performed using the Lowest, Middle and the Highest frequency (L, M and H). If there are 2 or fewer frequencies, testing shall be performed with the available frequencies.			



3.2 Antenna Requirement

Standard requirement


Applicable for equipment with an antenna terminal, including testing terminals) If an antenna connector is available, all relevant tests will be carried out conducted. If not, tests will be carried out in an anechoic room or with a suitable test-fixture.

The antenna is welded to the main PCB and no consideration of replacement. The best case gain of the antenna is 3.32dBi

Result: An antenna connector is available; all relevant tests will be carried out conducted.



3.3 Interference prevention function

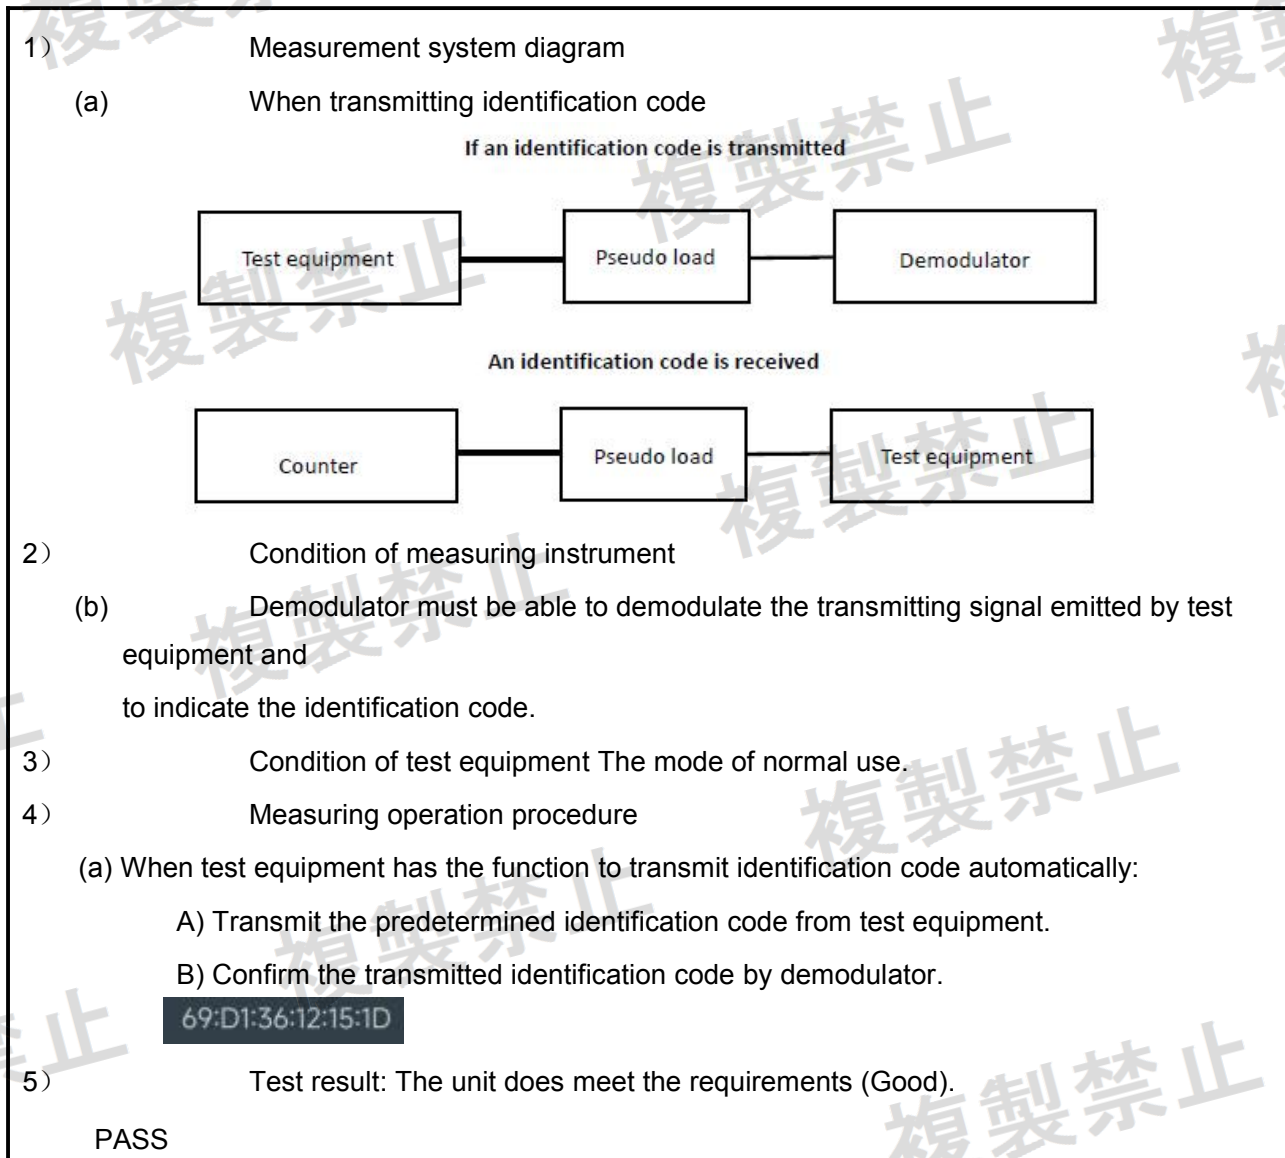



3.4 RF accessibility

Standard requirement

MT72: 無人移動体画像伝送システムの特性試験方法



The EUT shall be constructed in such a way that sensitive RF parts, (like modulation and oscillator parts) cannot be reached easily by the user. These parts shall be covered by soldered metal caps or glue or by other mechanical covers. If the covers are fixed with screws, these shall be not the common type(s) like a Phillips, but special versions like Torx, so that the user cannot open the device with common tools.

RF and Modulation parts are mounted on PCB with surface mount technology, and there is no any adjustable parts on PCB or adjustable parts are not exposed.





3.5 Frequency Tolerance

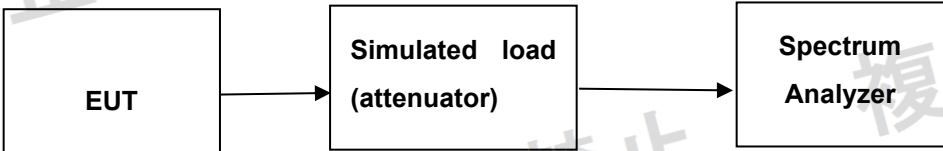Limit:	$\pm 20 \times 10^{-6}$
Test Status:	Test the EUT in transmitting mode without modulation.
Temperature:	25°C
Humidity:	56 % RH
Atmospheric Pressure:	101.0kPa -101.3 kPa
Test Configuration:	
Test Procedure:	1) Test Conditions: Spectrum Analyzer is used for measurement. 2) EUT conditions: Modulation/Spread/Hopping OFF, CW Tx 3) Spectrum Analyzer conditions: Frequency: Test Frequency Span =OCB*2 RBW =OCB*1% (Modulation OFF), VBW =RBW (Modulation OFF), Sweep Time Auto Detector mode Positive peak Indication mode Max hold II. Vibration Test 1 Measurement System Diagram  2 State of the Testing Equipment (1) During vibration testing using the vibration tester, the device under test must be kept in a non- operational state (with the power off). (2) After completing the vibration testing with the vibration tester, if you need to verify the functionality of the device under test, set it to the test frequency and operate it under normal usage conditions. 3 Measurement Procedure Steps (1) The test equipment is secured to the vibration plate of the vibration testing machine using mounting fixtures (devices that simulate the normal installation position of the equipment). (2) A vibration testing machine is used to apply vibrations to the test equipment. However, the amplitude, frequency, and direction of the vibrations applied to the equipment must comply



with the conditions specified in items a and i; the sequence for setting these vibration parameters may be arbitrary.

A: Full amplitude of 3 mm; vibrations ranging from the minimum frequency up to 500 cycles per minute, performed for 15 minutes in each direction (up-down, left-right, and forward-backward). The scanning cycle for vibration frequency is set at 10 minutes, with the lowest frequency being scanned continuously.

The vibration frequency shall be adjusted in descending order of minimum values, with a rate of 500 cycles per minute.

Specifically, a sweep at a frequency corresponding to 1.5 cycles per minute shall be performed over a period of 15 minutes.

(Note): The minimum vibration frequency shall be the lowest frequency that can be set on the vibration testing machine (provided that it does not exceed 300 cycles per minute).

The device performs vibrations with a full amplitude of 1 mm and a frequency ranging from 500 to 1800 cycles per minute, applied vertically, horizontally, and vertically for each direction over a period of 15 minutes. The scanning cycle duration is set at 10 minutes; the vibration frequency is adjusted in the following sequence: from 500 cycles/min to 1800 cycles/min and back to 500 cycles/min, resulting in a total of 1.5 scanning cycles per 15-minute interval.

(3) After applying the vibration described in item (2) above, the specified power supply voltage (as stated in General Information 2 – Power Supply Voltage) must be maintained.


(2) Add the reference information and then operate the testing device.

(4) The frequency of the testing equipment is measured using a test apparatus.

For the specific method of measuring frequency, please refer to the section "Frequency Deviation."

III. Temperature and Humidity Test

1 Measurement System Diagram

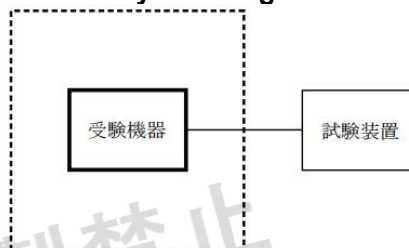

Temperature and Humidity Test Tank (Constant Temperature Tank)



2 State of the Testing Equipment

- (1) When the test equipment is placed in the temperature and humidity testing chamber under the specified environmental conditions, it must be kept in an inactive state (power off).
- (2) After the specified storage period has elapsed (or after returning to ambient temperature and humidity conditions in humidity tests), when performing operational verification of the test equipment, set the device to its test frequency and operate it under normal usage conditions.

3 Measurement Procedure Steps

(1) Low-temperature test

- A. Place the test equipment in the temperature and humidity test chamber in an inactive state, and set the chamber's temperature to a low value (the lowest among 0°C, -10°C, or -20°C within the equipment's specified range).

Leave it in this state for 1 hour.

After the aforementioned time period, apply the specified power voltage (refer to Section 2 "Power Voltage" in General Information) within the temperature and humidity test chamber to operate the test equipment.

- E: Use the testing equipment to measure the frequency of the device under test.

For the specific method of measuring frequency, please refer to the section "Frequency Deviation."

(2) High-temperature test

- A. Place the test equipment in the temperature and humidity test chamber in an inactive state, and set the chamber temperature to a high value (the highest among 40°C, 50°C, or 60°C within the equipment's specified range) while maintaining constant humidity.

Leave it in this state for 1 hour.

After the aforementioned time period, within the temperature and humidity test chamber, the specified power supply voltage (as stated in Section 2 of the General Information) must be maintained.

Apply the specified voltage (refer to Section 2) and then operate the test equipment.

- E: Use the testing equipment to measure the frequency of the device under test.

For the specific method of measuring frequency, please refer to the section "Frequency Deviation."

(3) Humidity Test

- A. Place the test equipment in the temperature and humidity test chamber in an inactive state, then set the chamber's temperature to 35°C and relative humidity to either 95% or the maximum humidity specified in the equipment's specifications.

Leave it in this state for 4 hours.

Guangdong DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang 'an Town, Dongguan City, Guangdong P.R.China

Web: www.dn-testing.com

Tel: +86-769-88087383

E-mail: service@dn-testing.com



After the aforementioned period of time, reset the parameters of the temperature and humidity test chamber to normal ambient conditions; verify that no condensation has occurred, then apply the specified power voltage (refer to Section 2 "Power Voltage" in General Specifications) and activate the test equipment.

E: Use the testing equipment to measure the frequency of the device under test.

For the specific method of measuring frequency, please refer to the section "Frequency Deviation."

The detailed test data see: Appendix A




3.6 Output Power and Tolerance

Limit:	5.7GHz band			
	Items	5MHz System	10MHz System	20MHz System
	Output power	1W	1W	1W
	Antenna Power Error	+50%, -50%		
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.			
Temperature:	23.8 °C			
Humidity:	56 % RH			
Atmospheric Pressure:	101.0kPa -101.3 kPa			
Test Configuration:	EUT Spectrum Analyzer			
Test Procedure:	Test Conditions: Spectrum Analyzer is used for measurement. EUT conditions: Modulation/Spread/Hopping ON For equipment using diffusion code, set to the test diffusion code and modulate with standard coding test signal. Spectrum Analyzer conditions: Frequency: Test Frequency RBW 1 MHz VBW 3 MHz Sweep Time Auto Detector mode PEAK Indication mode Max hold Mark to the maximum value, Record this frequency and Set the spectrum to this frequency point RBW 1MHz VBW 1MHz Span:0Hz Indication mode Max hold Detector mode PEAK Sweep Time: 30.4ms Record the maximum value.			
The detailed test data see: Appendix B				



3.7 Occupied Bandwidth

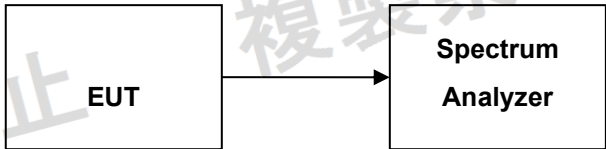Limit:	5MHz system: $\leq 4.5\text{MHz}$ 10MHz system: $\leq 9.0\text{MHz}$ 20MHz system: $\leq 19.7\text{MHz}$
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Temperature:	23.8 °C
Humidity:	56 % RH
Atmospheric Pressure:	101.0kPa -101.3 kPa
Test Configuration:	 <pre>graph LR; EUT[EUT] --> SA[Spectrum Analyzer]</pre>
Test Procedure:	1) Test Conditions: Spectrum Analyzer is used for measurement. 2) EUT conditions: Modulation/Spread/Hopping ON For equipment using diffusion code, set to the test diffusion code and modulate with standard coding test signal. 3) Spectrum Analyzer conditions: Frequency: Test Frequency Span=OCB*2 RBW=OCB*0.1 VBW same as RBW Sweep Time Auto detector mode Sample Indication mode Max hold OBW 99%
Test steps:	(1) set the spectrum analyzer to 2. (2) after the sweep is repeated until no change is observed in the display, the values of all data points are taken into the array variable of the computer. (3) for all data, dB value is converted to true number of power dimension. (4) the total power of all data is obtained and stored as "total power". (4) from the data of the lowest frequency, the power is added in order, and the limit data point whose value becomes 0.5% of the "total power" is obtained. The limiting point is converted to a frequency and stored as the "lower frequency". (5) (6) from the highest frequency data, the power is added sequentially down to the limit data point where the value becomes 0.5% of the "total power". The limit point is converted to a frequency and stored as the "upper frequency". (7) the occupied frequency band is obtained as (upper frequency - lower frequency).
The detailed test data see: Appendix C	



3.8 Adjacent Channel leakage Power

Limit:	OBW ≤ 4.5MHz:	± 5MHz	≤ -25dBc/4.5MHz
		± 10MHz	≤ -40dBc/4.5MHz
	OBW ≤ 9MHz:	± 10MHz	≤ -25dBc/9MHz
		± 20MHz	≤ -40dBc/9MHz
	OBW ≤ 19.7MHz:	± 20MHz	≤ -25dBc/19MHz
		± 40MHz	≤ -40dBc/19MHz
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channels were selected for the final test as listed below.		
Temperature:	23.8 °C		
Humidity:	56 % RH		
Atmospheric Pressure:	101.0kPa -101.3 kPa		
Test Configuration:	EUT Spectrum Analyzer		
Test Procedure:	1. Test Conditions: Power meter or Spectrum Analyzer is used for measurement. 2. EUT conditions: Modulation/Spread For equipment using diffusion code, set to the test diffusion code and modulate with standard coding test signal. 3. Spectrum Analyzer conditions: Frequency: Test Frequency RBW 300KHz, VBW 300KHz Span 120 MHz ; detector mode Sample Indication mode Max hold		
The detailed test data see: Appendix D			




3.9 Unwanted emission strength

Limit:	5.7GHz Band	4.5 MHz or less	Less than 5590 MHz : 0.63μW/ MHz
			5590 (≤) ~ (<) 5630MHz : 3μW/ MHz
			5630 (≤) ~ (<) 5640MHz : 6.3μW/ MHz
			5765 (<) ~ (≤) 5775MHz : 6.3μW/ MHz
			5775 (<) ~ (≤) 5815MHz : 3μW/ MHz
		4.5 (<) ~ (≤) 19.7MHz	Over 5815MHz : 0.63μW/ MHz
			Less than 5590 MHz : 0.63μW/ MHz
			5590 (≤) ~ (<) 5630MHz : 3μW/ MHz
			5775 (<) ~ (≤) 5815MHz : 3μW/ MHz
			Over 5815MHz : 0.63μW/ MHz
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.		
Temperature:	23.8 °C		
Humidity:	56 % RH		
Atmospheric Pressure:	101.0kPa -101.3 kPa		
Test Configuration:	EUT Spectrum Analyzer		
Test Procedure:	Test Conditions: Spectrum Analyzer is used for measurement. EUT conditions: Modulation/Spread For equipment using diffusion code, set to the test diffusion code and modulate with standard coding test signal. Spectrum Analyzer conditions: Step 1: All spurious are measured from 30MHz to 26GHz by peak mode. Step 2: Frequency: Spurious Frequency 30MHz to 26GHz RBW 1 MHz VBW 1 MHz Sweep Time Auto detector mode Sample Indication mode Max hold		
The detailed test data see: Appendix E			



3.10 Secondary Radiated Emission strength

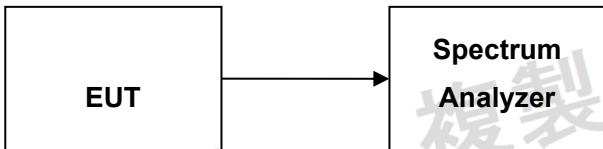Limit:	(1) Below 1 GHz : 4 nW or less (2) 1 GHz and over : 20 nW or less
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Temperature:	23.8 °C
Humidity:	56 % RH
Atmospheric Pressure:	101.0kPa -101.3 kPa
Test Configuration:	 <pre>graph LR; EUT[EUT] --> SA[Spectrum Analyzer]</pre>
Test Procedure:	1. Test Conditions: Spectrum Analyzer is used for measurement. 2. EUT conditions: Modulation/Spread/Hopping ON For equipment using diffusion code, set to the test diffusion code and modulate with standard coding test signal 3. Spectrum Analyzer conditions: Step 1: All spurious are measured from 30 MHz to 26 GHz by peak mode. Step 2: IF the value measured by Step1 is 2 dB or less, measure in average mode. Test setup for Step 1: Frequency: 30 MHz – 1GHz , 1GHz –26GHz RBW 100 kHz (30 – 1GHz) , 1 MHz (over 1GHz) VBW 100 kHz (30 – 1GHz) , 1 MHz (over 1GHz) Sweep Time Auto detector mode Positive peak Indication mode Max hold Test setup for Step 2: Frequency: Spurious Frequency Span 0 Hz RBW 100 kHz (30 – 1GHz) , 1 MHz (over 1GHz) VBW 100 kHz (30 – 1GHz) , 1 MHz (over 1GHz) Sweep Time Auto detector mode Sample Indication mode Max hold
The detailed test data see: Appendix F	



4 Appendix

Appendix A: Frequency Tolerance

Test Result NTVN 10MHz

TestCondition	TestMode	Antenna	Freq(MHz)	CenterFreq [MHz]	Result [ppm]	Limit [ppm]	Verdict
NTVN	10M-S mode(SISO)	Ant1	5655	5655.016	2.82936	±20	PASS
		Ant2	5655	5655.016	2.82936	±20	PASS
		Ant1	5695	5695.016	2.80948	±20	PASS
		Ant2	5695	5695.016	2.80948	±20	PASS
		Ant1	5750	5750.016	2.78262	±20	PASS
		Ant2	5750	5750.016	2.78261	±20	PASS
	10M-M(HT) MIMO mode	Ant1	5655	5655.016	2.82936	±20	PASS
		Ant2	5655	5655.016	2.82936	±20	PASS
		Ant1	5695	5695.016	2.80955	±20	PASS
		Ant2	5695	5695.016	2.80948	±20	PASS
		Ant1	5750	5750.016	2.78261	±20	PASS
		Ant2	5750	5750.016	2.78261	±20	PASS
	10M-M(VHT) MIMO mode	Ant1	5655	5655.016	2.82936	±20	PASS
		Ant2	5655	5655.016	2.82936	±20	PASS
		Ant1	5695	5695.016	2.80958	±20	PASS
		Ant2	5695	5695.016	2.80948	±20	PASS
		Ant1	5750	5750.016	2.78261	±20	PASS
		Ant2	5750	5750.016	2.78261	±20	PASS



Test Result LTNV 10MHz

TestCondition	TestMode	Antenna	Freq(MHz)	CenterFreq [MHz]	Result [ppm]	Limit [ppm]	Verdict
LTNV	10M-S mode(SISO)	Ant1	5655	5655.016	2.82936	±20	PASS
		Ant2	5655	5655.016	2.82936	±20	PASS
		Ant1	5695	5695.016	2.80948	±20	PASS
		Ant2	5695	5695.016	2.80948	±20	PASS
		Ant1	5750	5750.016	2.78261	±20	PASS
		Ant2	5750	5750.016	2.78261	±20	PASS
	10M-M(HT) MIMO mode	Ant1	5655	5655.016	2.82936	±20	PASS
		Ant2	5655	5655.016	2.82936	±20	PASS
		Ant1	5695	5695.016	2.80948	±20	PASS
		Ant2	5695	5695.016	2.80948	±20	PASS
		Ant1	5750	5750.016	2.78261	±20	PASS
		Ant2	5750	5750.016	2.78261	±20	PASS
	10M-M(VHT) MIMO mode	Ant1	5655	5655.016	2.82936	±20	PASS
		Ant2	5655	5655.016	2.82936	±20	PASS
		Ant1	5695	5695.016	2.80948	±20	PASS
		Ant2	5695	5695.016	2.80948	±20	PASS
		Ant1	5750	5750.016	2.78261	±20	PASS
		Ant2	5750	5750.016	2.78261	±20	PASS



Test Result HTNV 10MHz

TestCondition	TestMode	Antenna	Freq(MHz)	CenterFreq [MHz]	Result [ppm]	Limit [ppm]	Verdict
HTNV	10M-S mode(SISO)	Ant1	5655	5655.016	2.82936	±20	PASS
		Ant2	5655	5655.016	2.82936	±20	PASS
		Ant1	5695	5695.016	2.80949	±20	PASS
		Ant2	5695	5695.016	2.80948	±20	PASS
		Ant1	5750	5750.016	2.78261	±20	PASS
		Ant2	5750	5750.016	2.78261	±20	PASS
	10M-M(HT) MIMO mode	Ant1	5655	5655.016	2.82936	±20	PASS
		Ant2	5655	5655.016	2.82936	±20	PASS
		Ant1	5695	5695.016	2.80947	±20	PASS
		Ant2	5695	5695.016	2.80948	±20	PASS
		Ant1	5750	5750.016	2.78261	±20	PASS
		Ant2	5750	5750.016	2.78261	±20	PASS
	10M-M(VHT) MIMO mode	Ant1	5655	5655.016	2.82936	±20	PASS
		Ant2	5655	5655.016	2.82936	±20	PASS
		Ant1	5695	5695.016	2.80948	±20	PASS
		Ant2	5695	5695.016	2.80944	±20	PASS
		Ant1	5750	5750.016	2.78261	±20	PASS
		Ant2	5750	5750.016	2.78265	±20	PASS



Test Result Humidity 10MHz

TestCondition	TestMode	Antenna	Freq(MHz)	CenterFreq [MHz]	Result [ppm]	Limit [ppm]	Verdict
Humidity	10M-S mode(SISO)	Ant1	5655	5655.016	2.82936	±20	PASS
		Ant2	5655	5655.016	2.82936	±20	PASS
		Ant1	5695	5695.016	2.80943	±20	PASS
		Ant2	5695	5695.016	2.80948	±20	PASS
		Ant1	5750	5750.016	2.78261	±20	PASS
		Ant2	5750	5750.016	2.78261	±20	PASS
	10M-M(HT) MIMO mode	Ant1	5655	5655.016	2.82936	±20	PASS
		Ant2	5655	5665.016	2.82436	±20	PASS
		Ant1	5695	5695.016	2.80948	±20	PASS
		Ant2	5695	5695.016	2.80948	±20	PASS
		Ant1	5750	5750.016	2.78261	±20	PASS
		Ant2	5750	5750.016	2.78261	±20	PASS
	10M-M(VHT) MIMO mode	Ant1	5655	5655.016	2.82936	±20	PASS
		Ant2	5655	5655.016	2.82933	±20	PASS
		Ant1	5695	5695.016	2.80946	±20	PASS
		Ant2	5695	5695.016	2.80948	±20	PASS
		Ant1	5750	5750.016	2.78261	±20	PASS
		Ant2	5750	5750.016	2.78262	±20	PASS




Test Result Vibration 10MHz

TestCondition	TestMode	Antenna	Freq(MHz)	CenterFreq [MHz]	Result [ppm]	Limit [ppm]	Verdict
Vibration	10M-S mode(SISO)	Ant1	5655	5655.016	2.82936	±20	PASS
		Ant2	5655	5655.016	2.82936	±20	PASS
		Ant1	5695	5695.016	2.80948	±20	PASS
		Ant2	5695	5695.016	2.80948	±20	PASS
		Ant1	5750	5750.016	2.78261	±20	PASS
		Ant2	5750	5750.016	2.78261	±20	PASS
	10M-M(HT) MIMO mode	Ant1	5655	5655.016	2.82936	±20	PASS
		Ant2	5655	5665.016	2.82436	±20	PASS
		Ant1	5695	5695.016	2.80948	±20	PASS
		Ant2	5695	5695.016	2.80948	±20	PASS
		Ant1	5750	5750.016	2.78261	±20	PASS
		Ant2	5750	5750.016	2.78261	±20	PASS
	10M-M(VHT) MIMO mode	Ant1	5655	5655.016	2.82936	±20	PASS
		Ant2	5655	5655.016	2.82936	±20	PASS
		Ant1	5695	5695.016	2.80948	±20	PASS
		Ant2	5695	5695.016	2.80948	±20	PASS
		Ant1	5750	5750.016	2.78261	±20	PASS
		Ant2	5750	5750.016	2.78261	±20	PASS



Test Graphs NTVN 10MHz

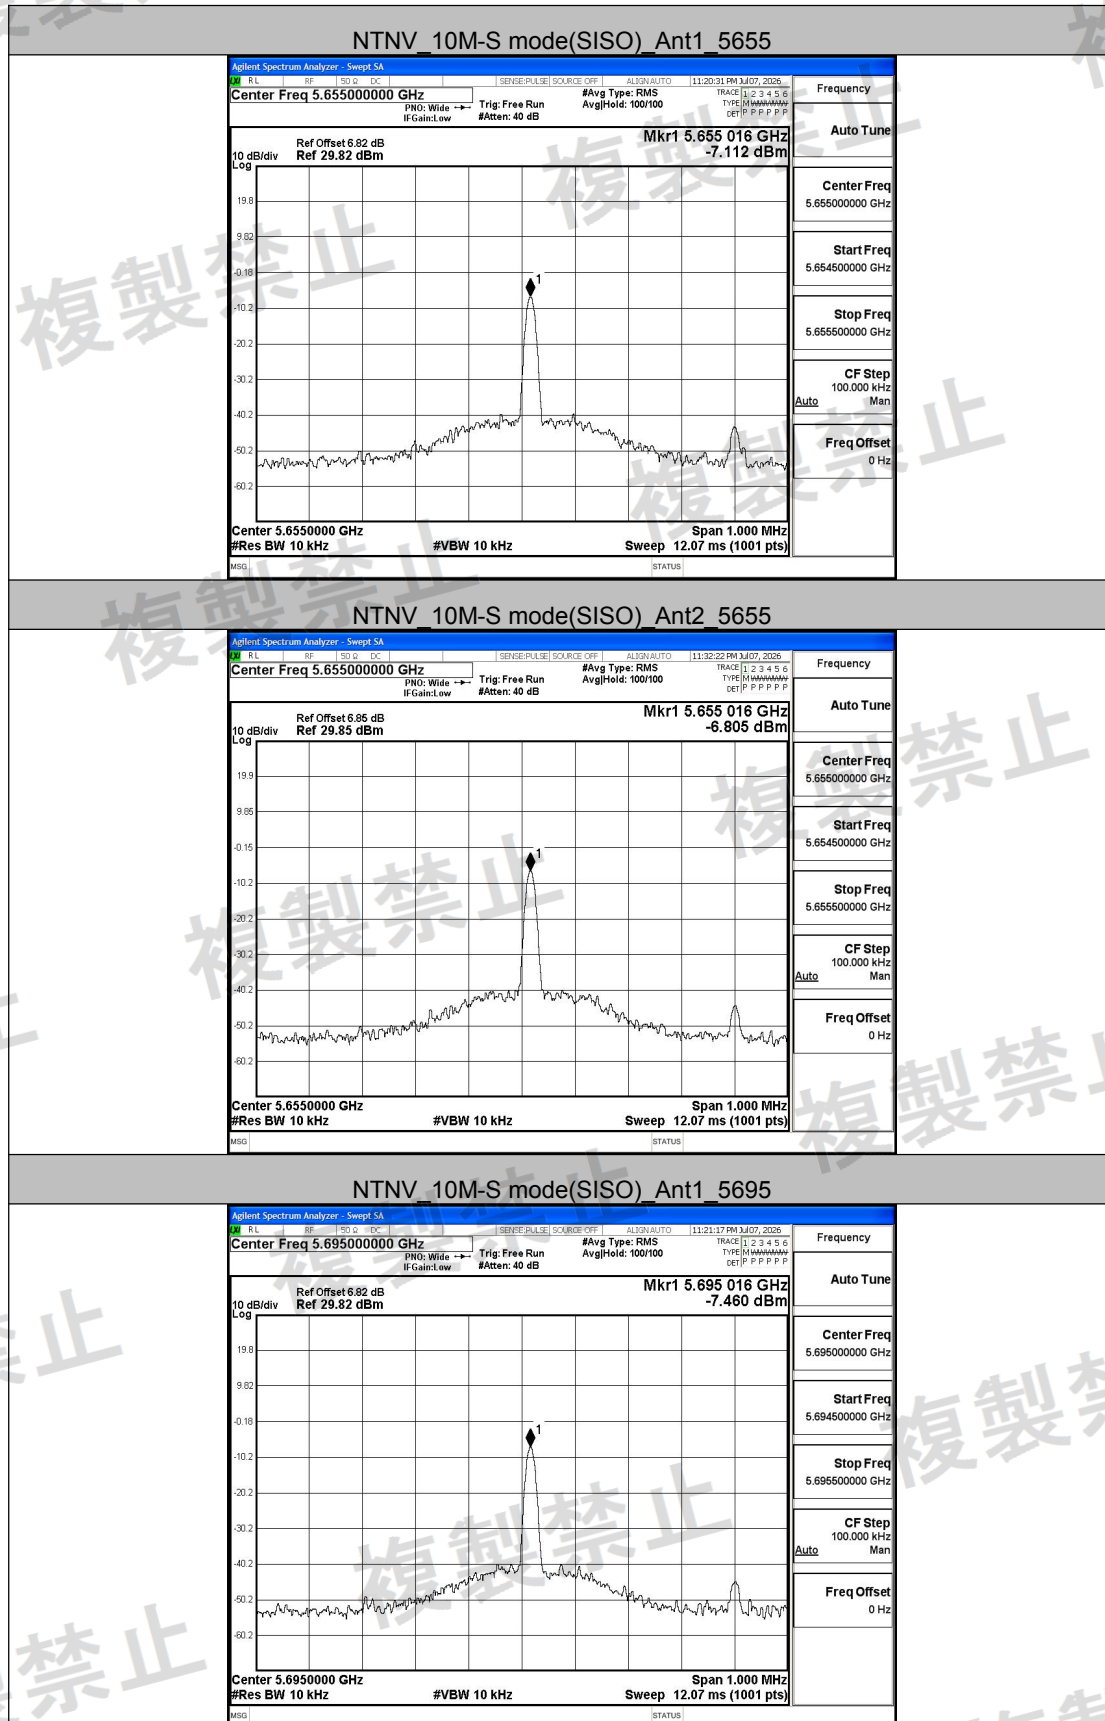

Guangdong DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang 'an Town, Dongguan City, Guangdong P.R.China


Web: www.dn-testing.com

Tel: +86-769-88087383


E-mail: service@dn-testing.com




NTNV_10M-S mode(SISO) Ant2 5695

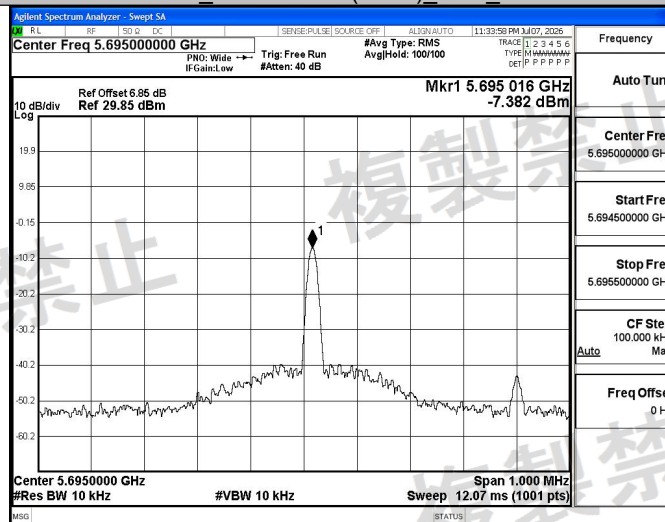

NTNV_10M-S mode(SISO) Ant1 5750

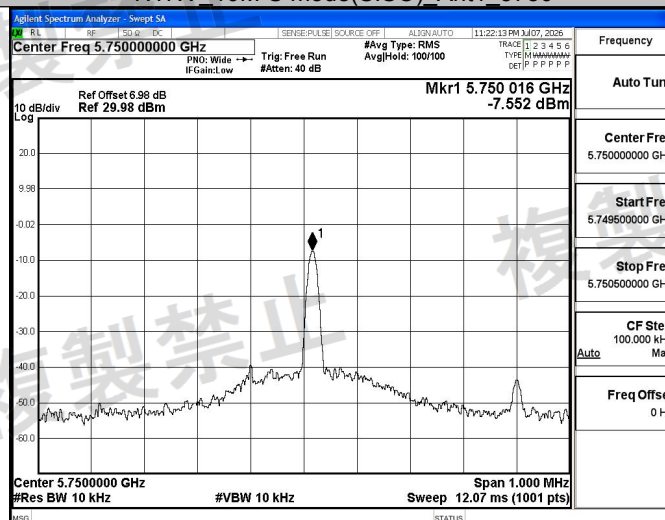

NTNV_10M-S mode(SISO) Ant2 5750

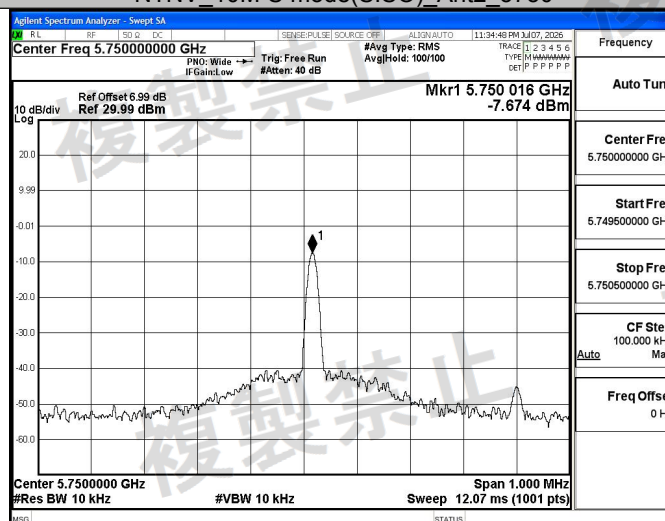

NTNV_10M-M(HT) MIMO mode Ant1 5655


Guangdong DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang 'an Town, Dongguan City, Guangdong P.R.China


Web: www.dn-testing.com

Tel: +86-769-88087383


E-mail: service@dn-testing.com

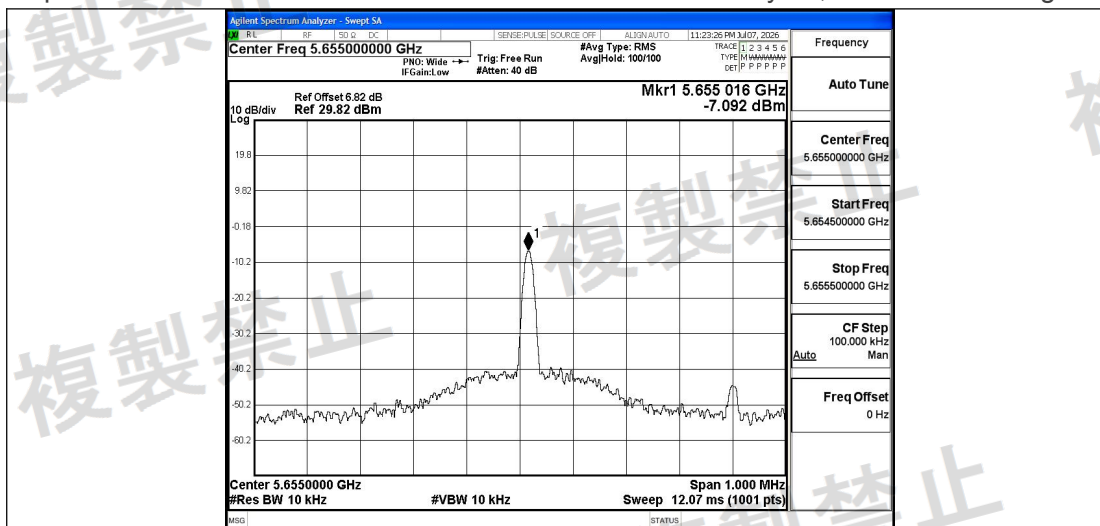


NTNV_10M-M(HT) MIMO mode_Ant2_5655

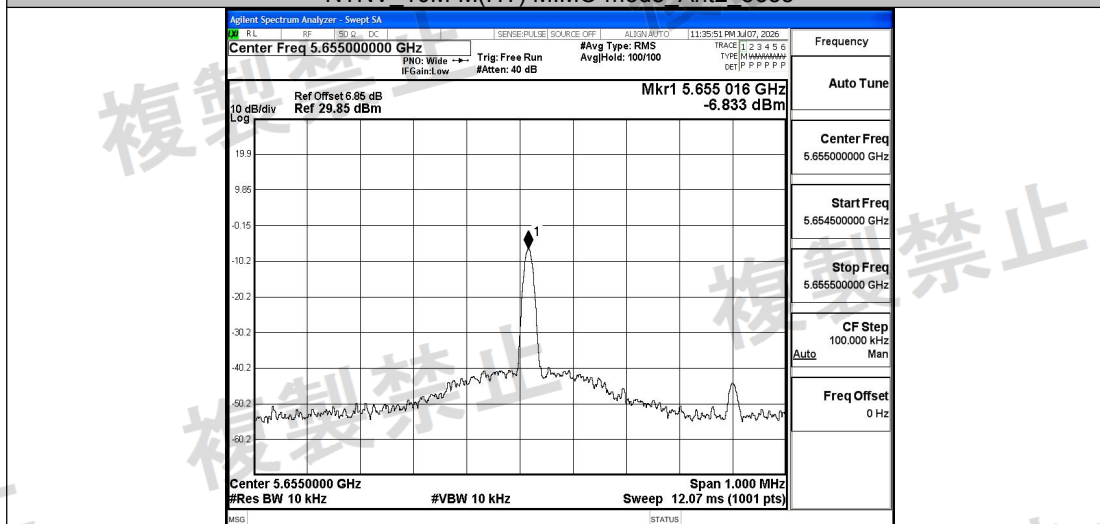


NTNV_10M-M(HT) MIMO mode_Ant1_5695

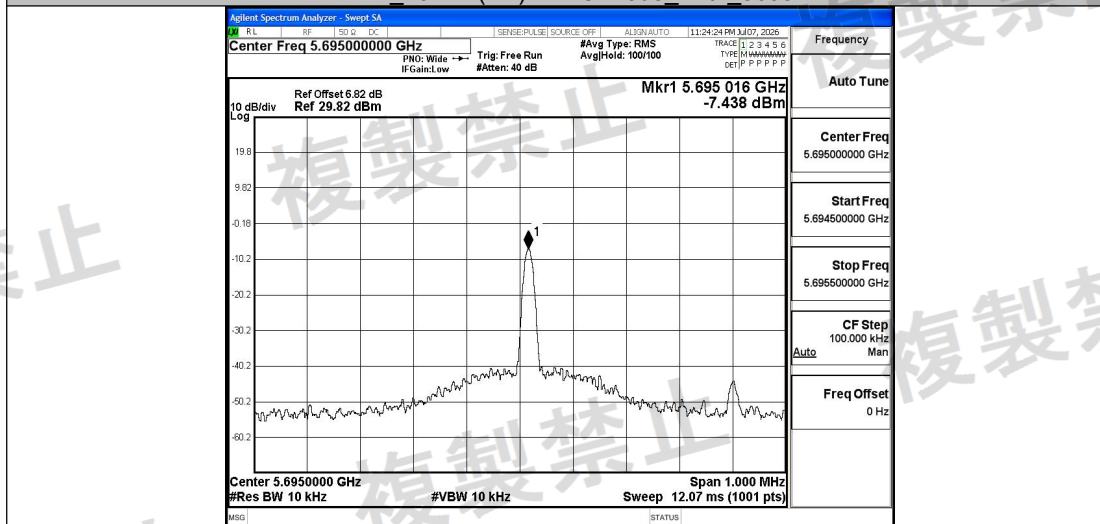


NTNV_10M-M(HT) MIMO mode_Ant2_5695

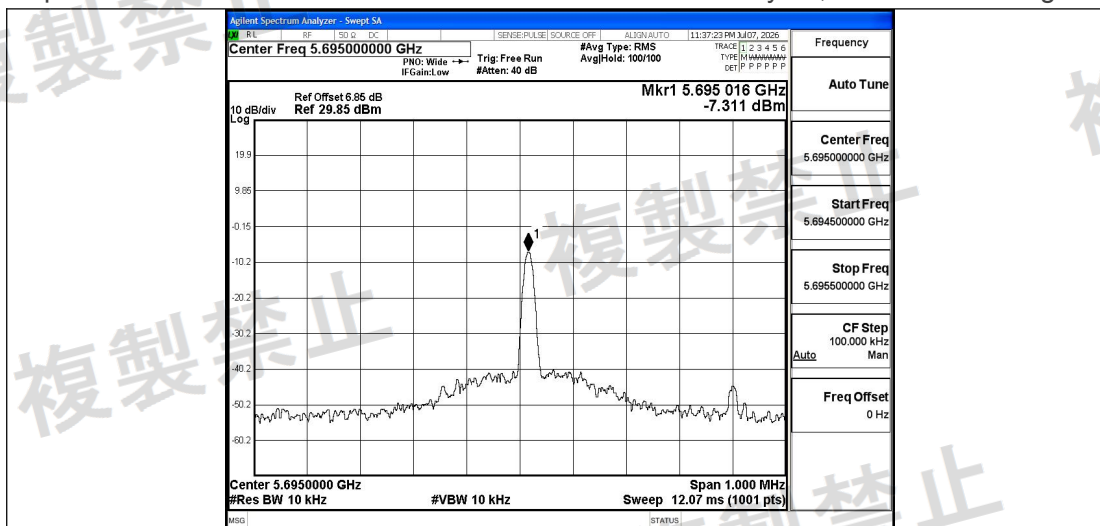


NTNV 10M-M(HT) MIMO mode Ant1 5750

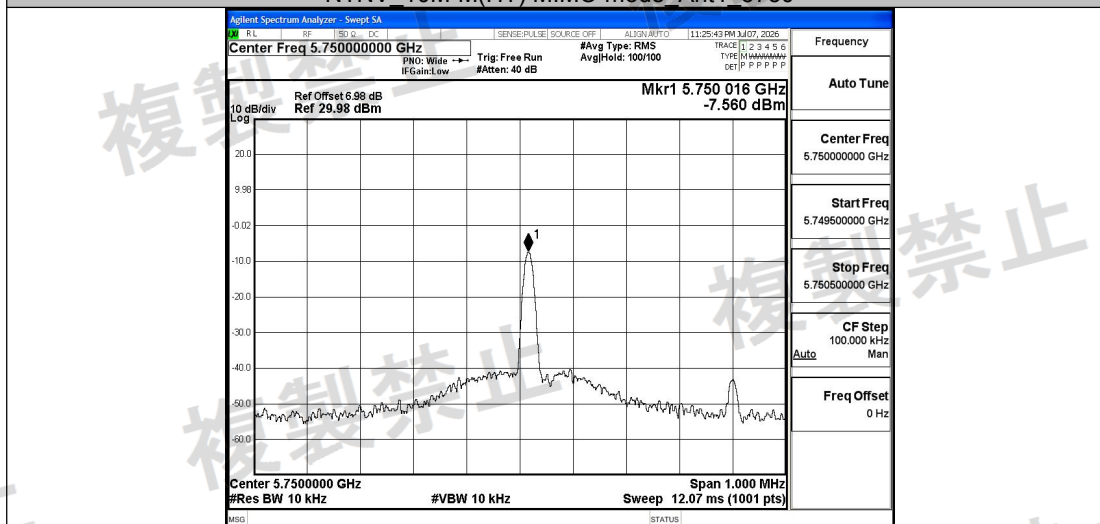


NTNV 10M-M(HT) MIMO mode Ant2 5750

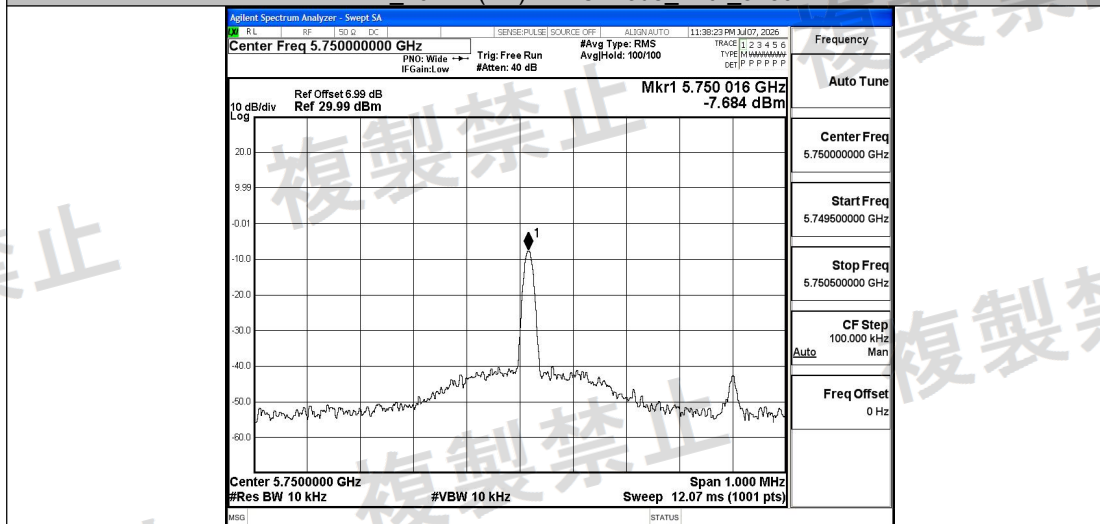


NTNV 10M-M(VHT) MIMO mode Ant1 5655

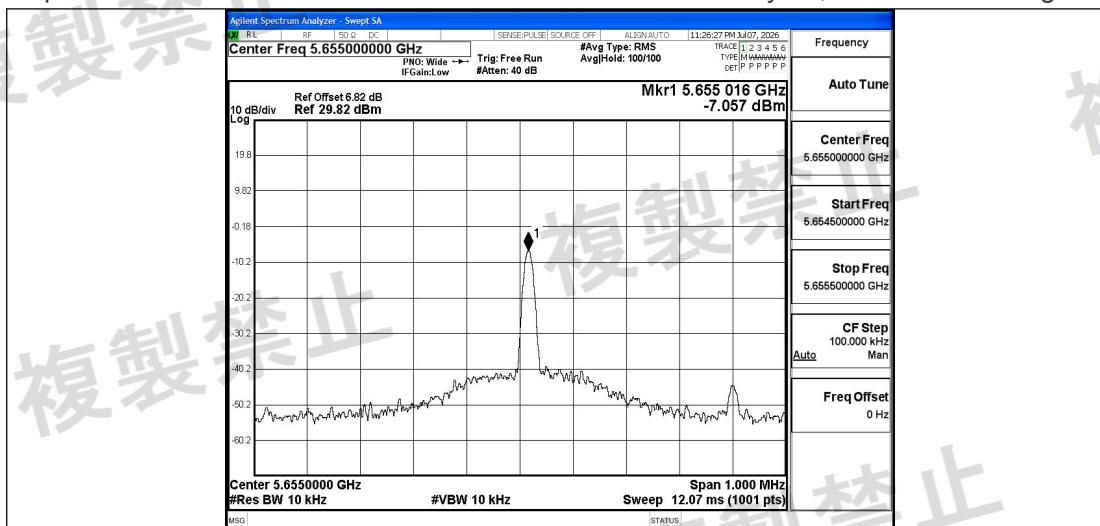


NTNV_10M-M(VHT) MIMO mode Ant2 5655

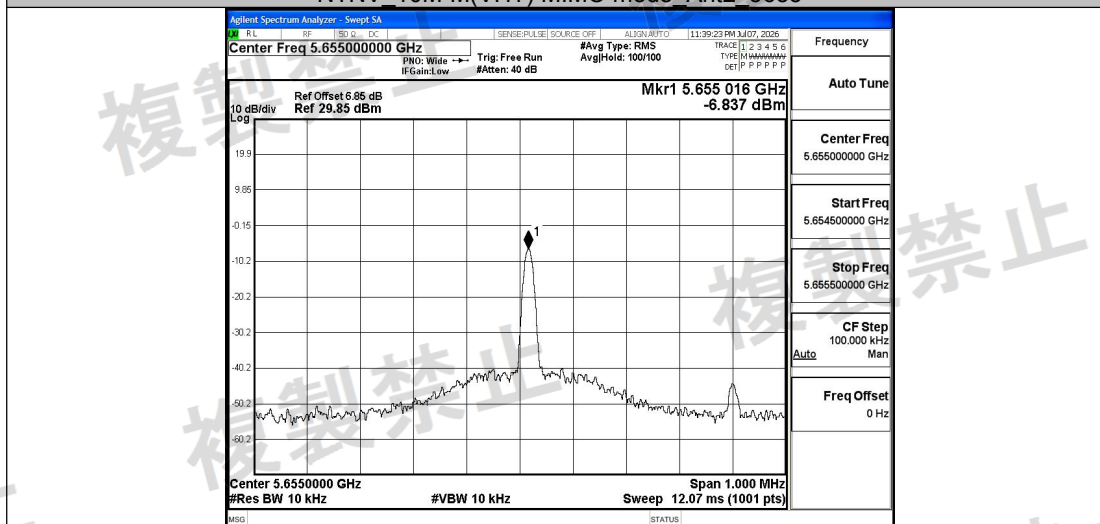


NTNV_10M-M(VHT) MIMO mode Ant1 5695

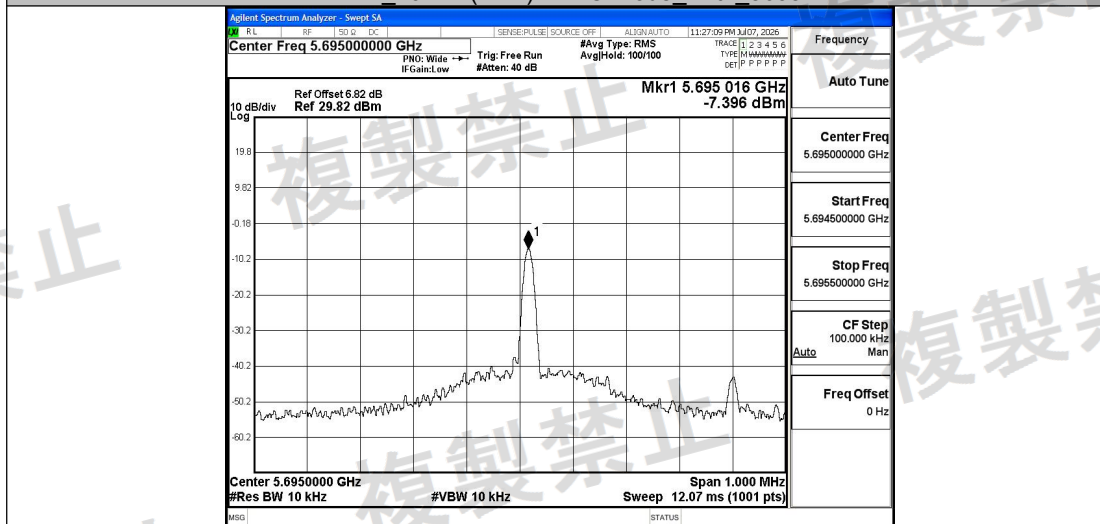


NTNV_10M-M(VHT) MIMO mode Ant2 5695

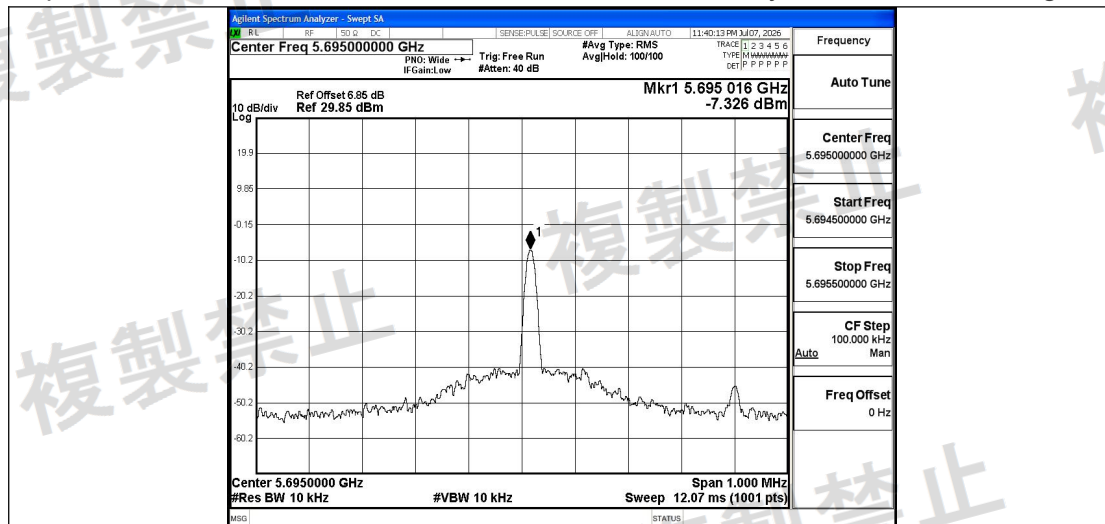

NTNV_10M-M(VHT) MIMO mode Ant1 5750

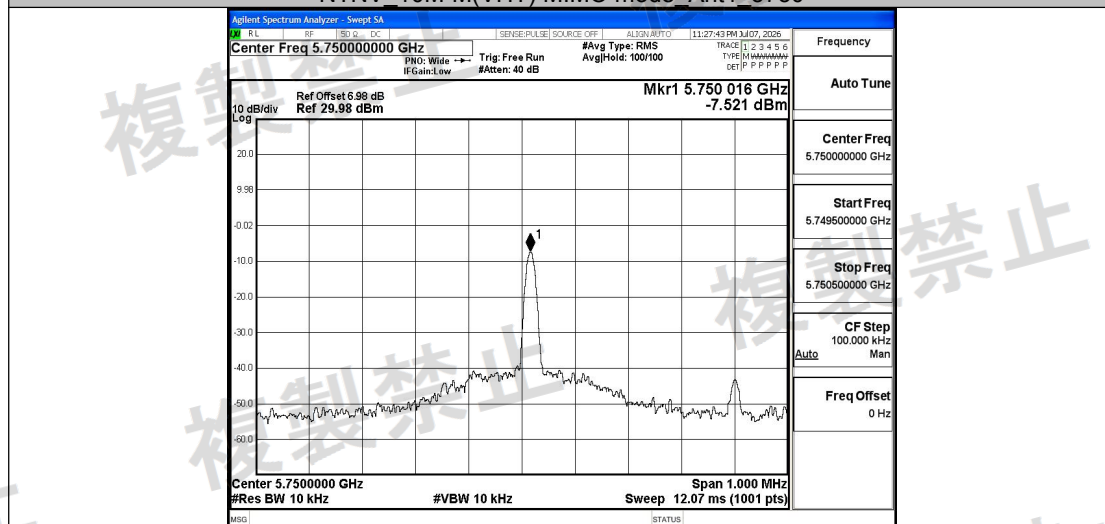


NTNV_10M-M(VHT) MIMO mode Ant2 5750

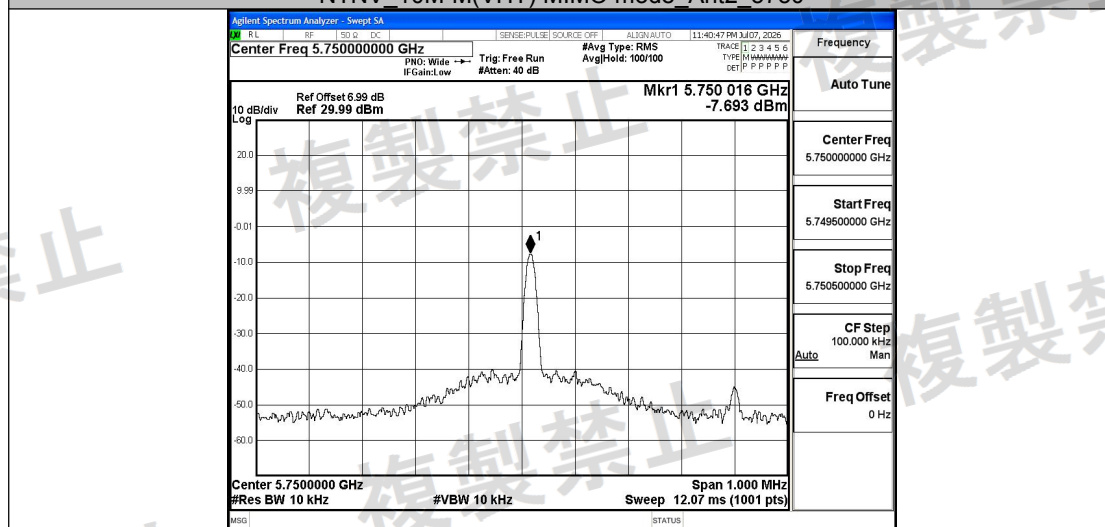



Test Graphs LTNV 10MHz

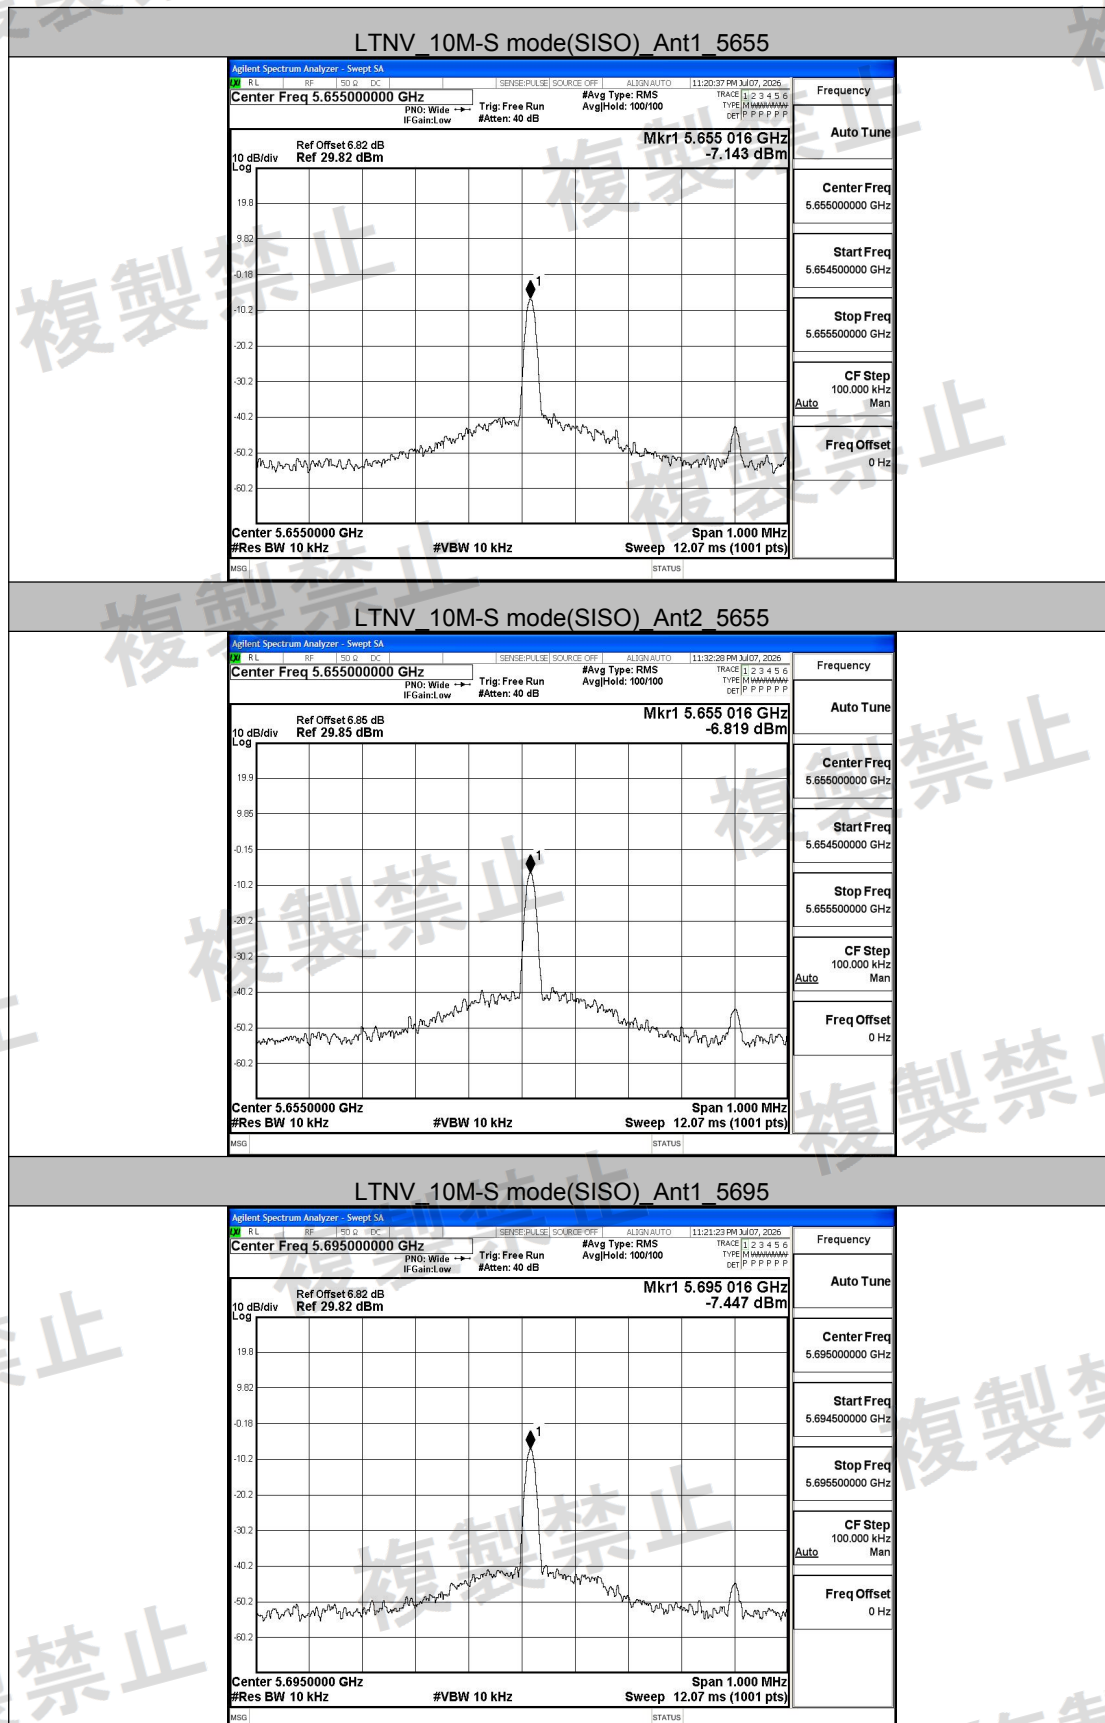

Guangdong DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang 'an Town, Dongguan City, Guangdong P.R.China


Web: www.dn-testing.com

Tel: +86-769-88087383


E-mail: service@dn-testing.com




LTNV_10M-S mode(SISO) Ant2_5695

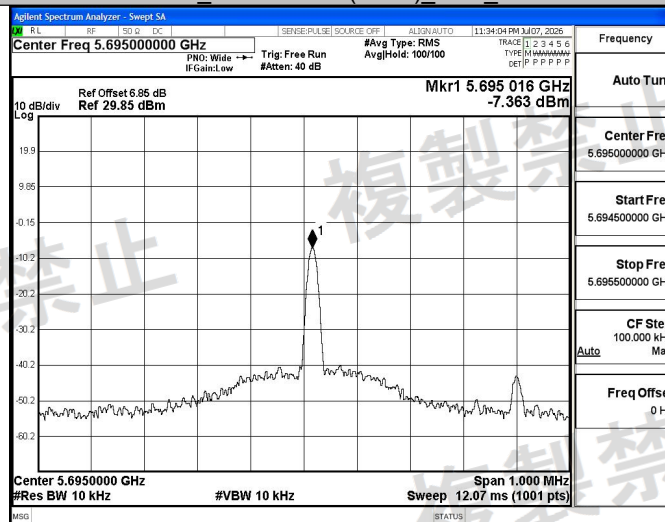

LTNV_10M-S mode(SISO) Ant1_5750

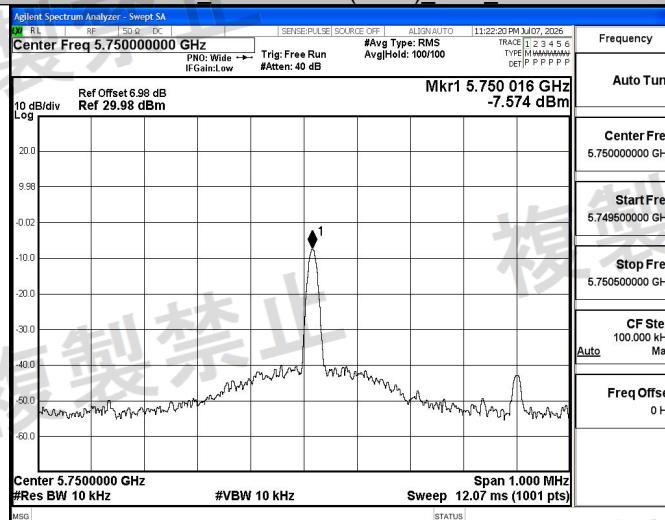

LTNV_10M-S mode(SISO) Ant2_5750

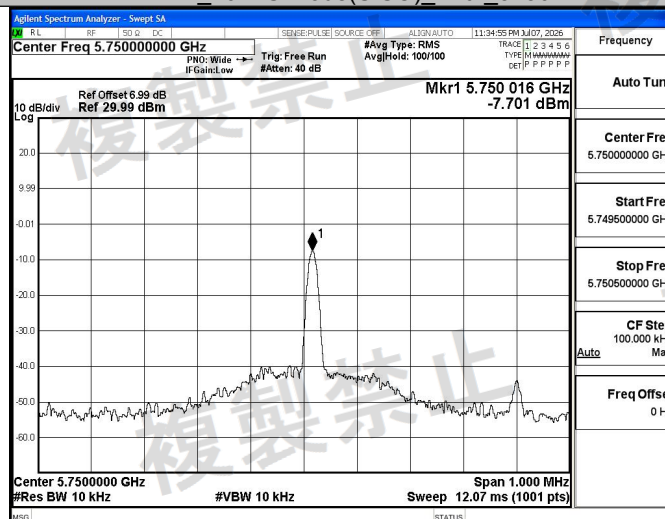

LTNV_10M-M(HT) MIMO mode_Ant1_5655


Guangdong DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang 'an Town, Dongguan City, Guangdong P.R.China


Web: www.dn-testing.com

Tel: +86-769-88087383


E-mail: service@dn-testing.com

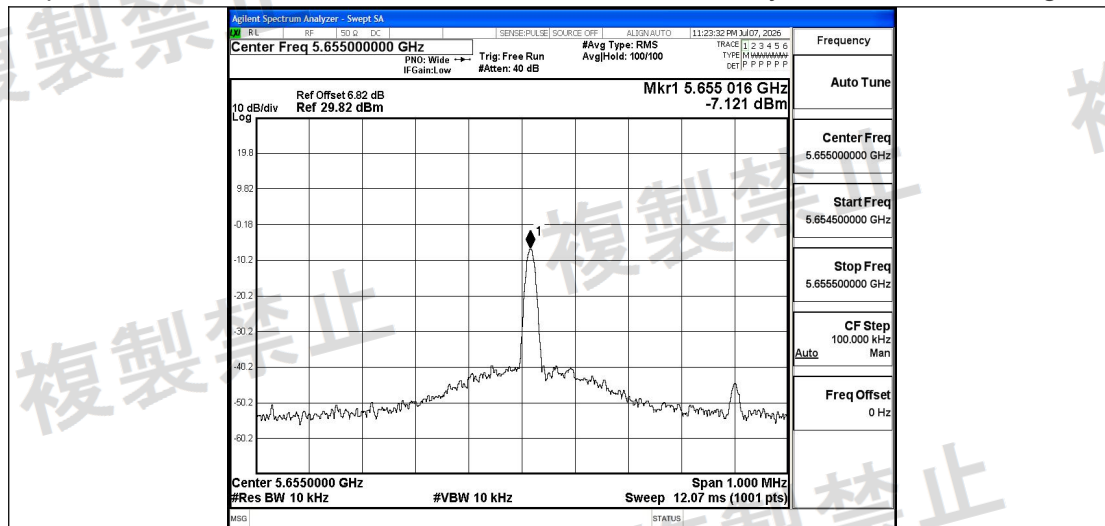


LTNV_10M-M(HT) MIMO mode_Ant2_5655

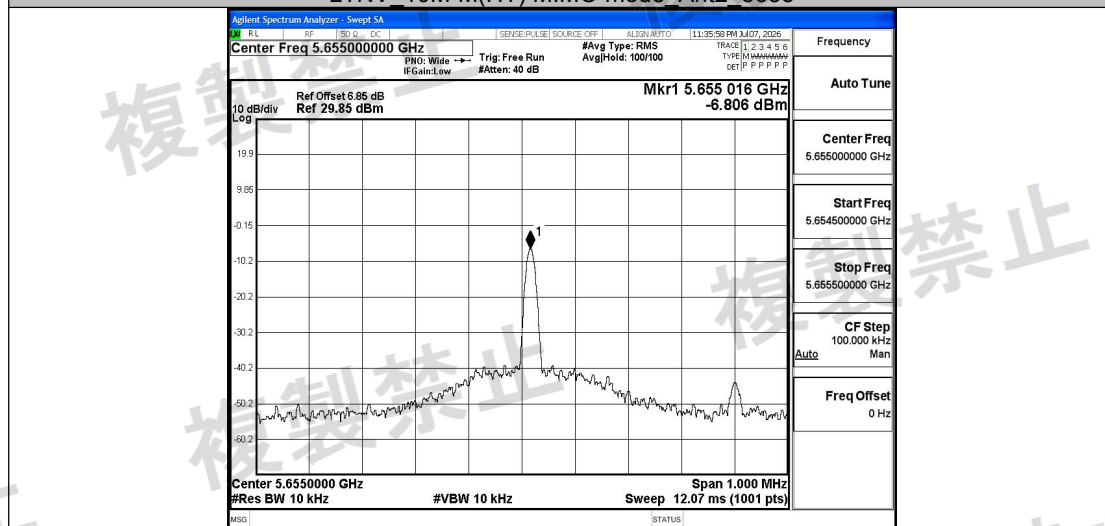


LTNV_10M-M(HT) MIMO mode_Ant1_5695

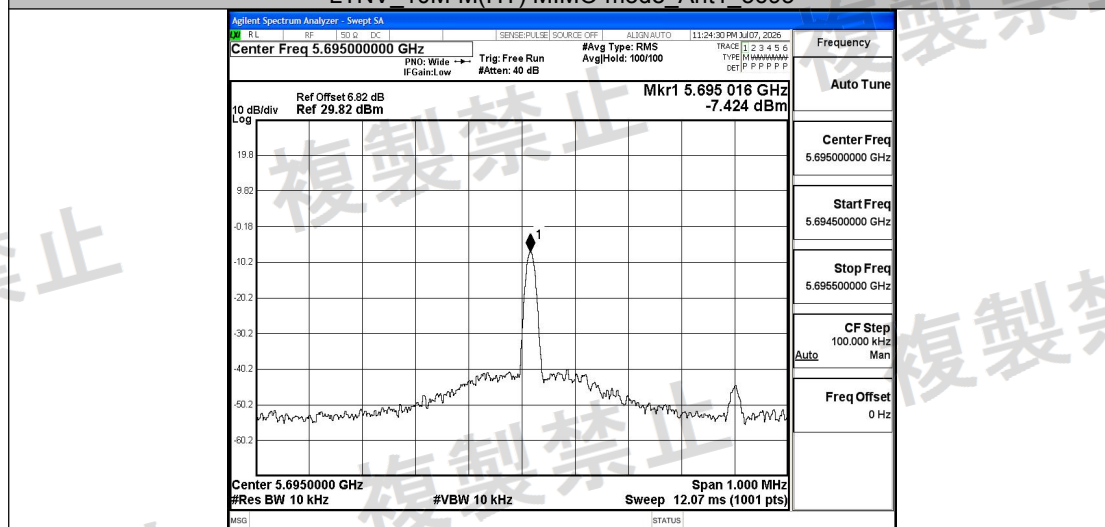


LTNV_10M-M(HT) MIMO mode_Ant2_5695

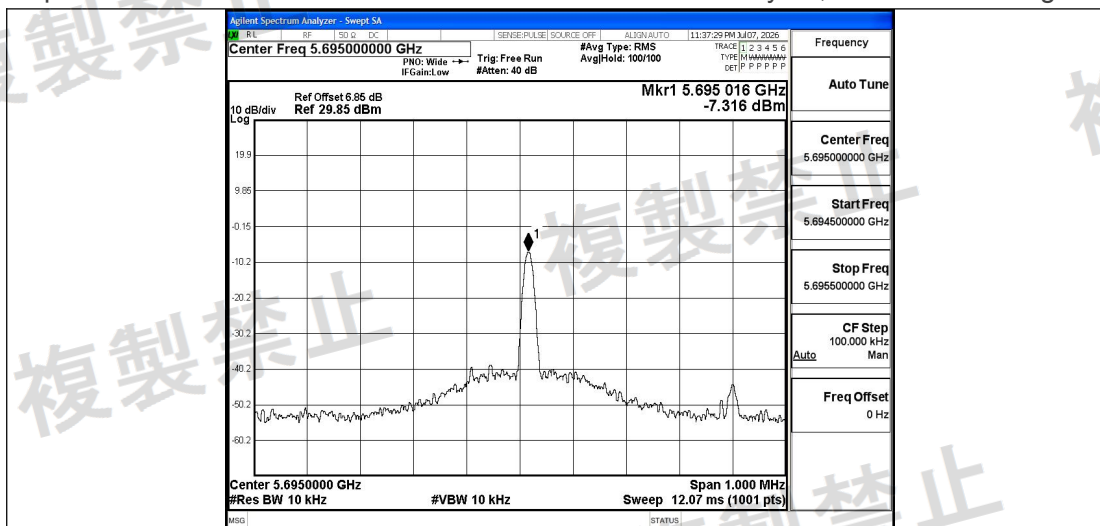


LTNV_10M-M(HT) MIMO mode_Ant1_5750

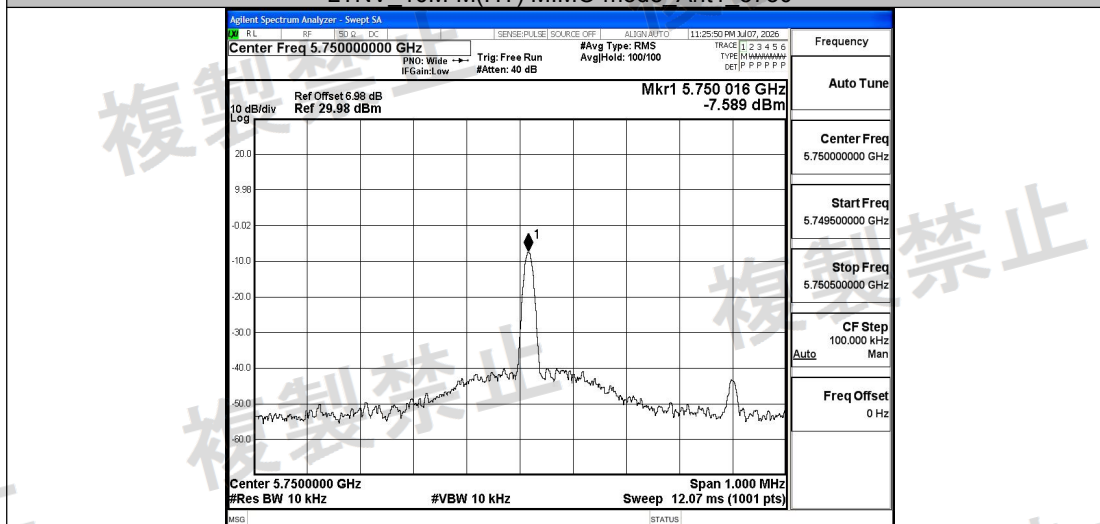


LTNV_10M-M(HT) MIMO mode_Ant2_5750

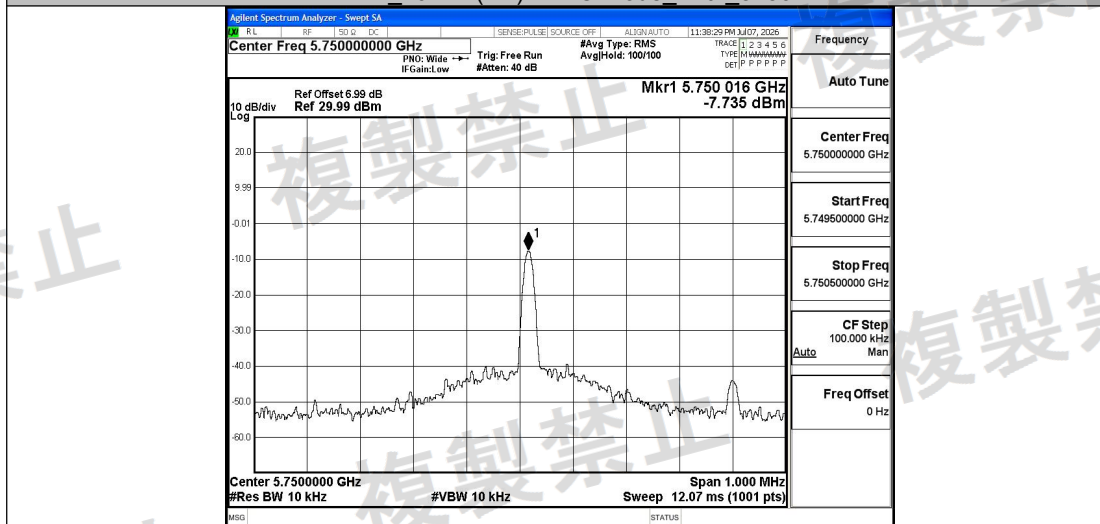


LTNV_10M-M(VHT) MIMO mode_Ant1_5655

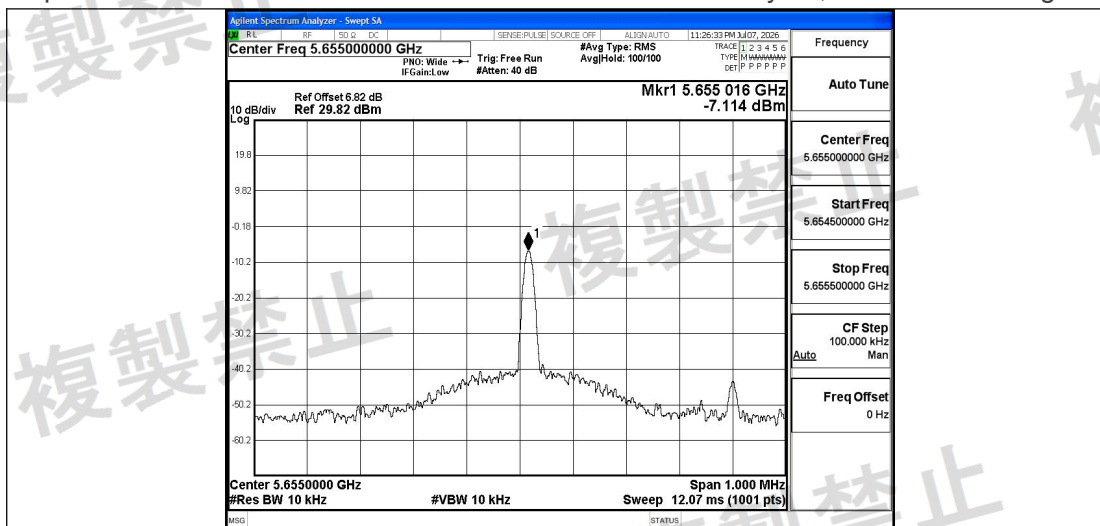


LTNV_10M-M(VHT) MIMO mode Ant2 5655

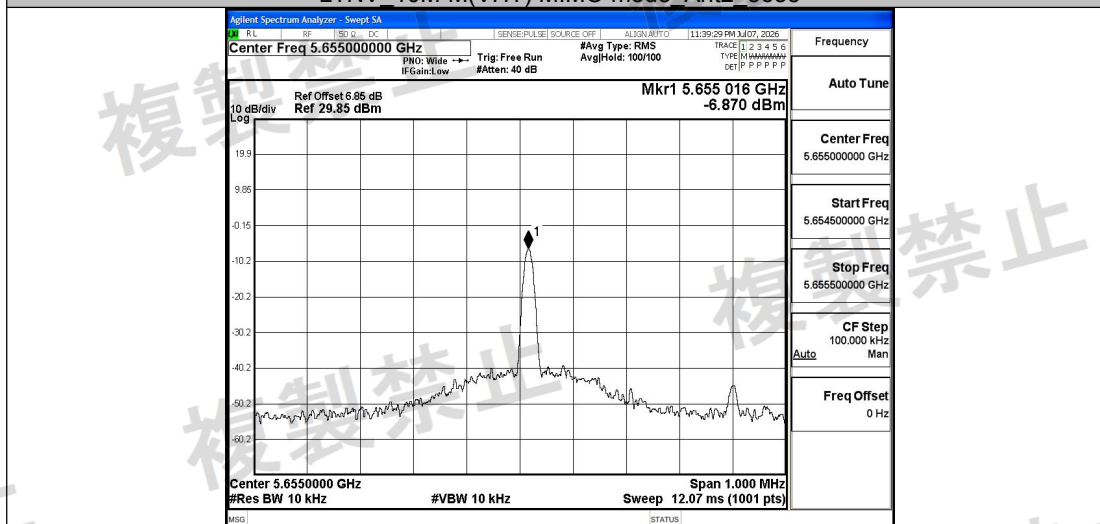


LTNV_10M-M(VHT) MIMO mode Ant1 5695

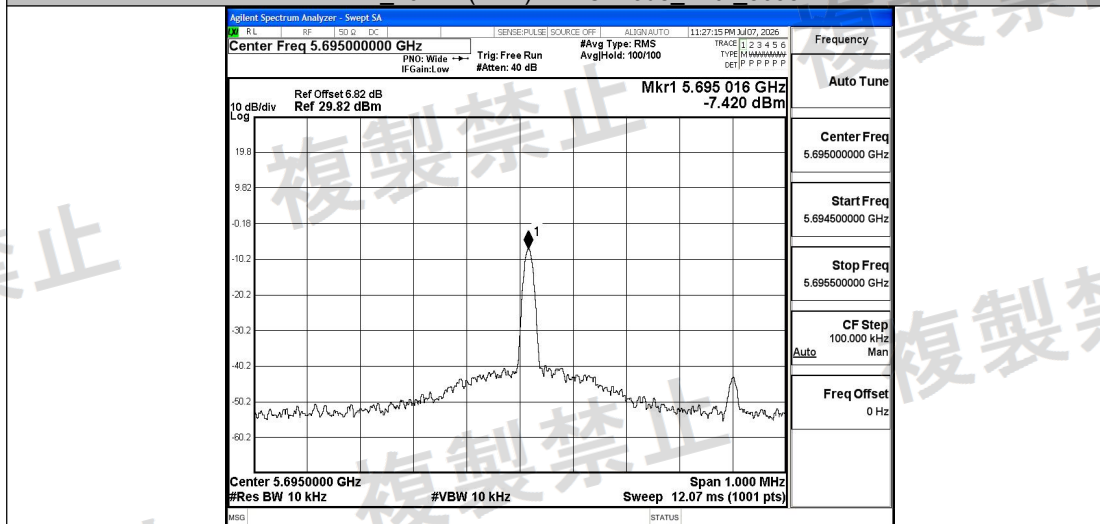


LTNV_10M-M(VHT) MIMO mode Ant2 5695

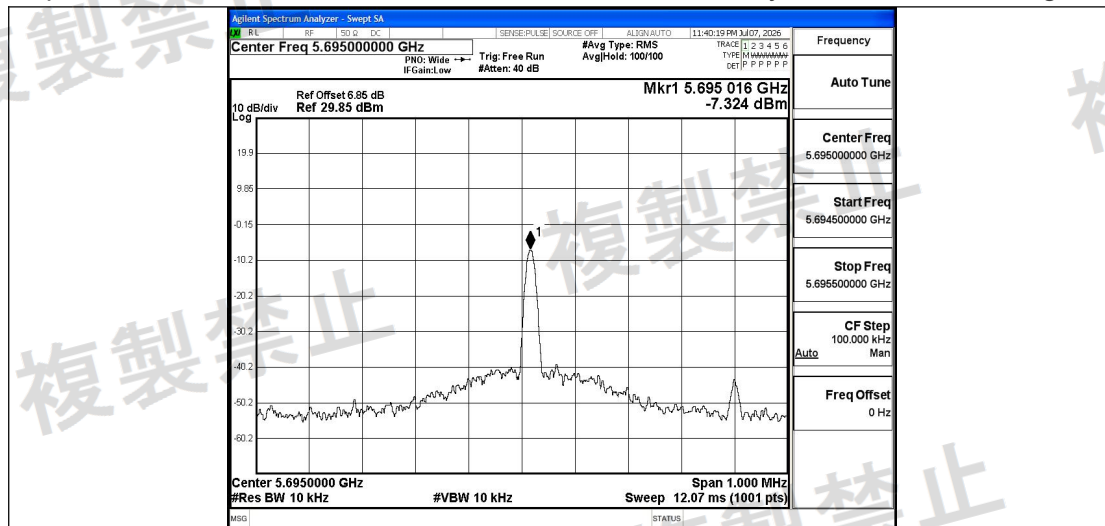

LTNV_10M-M(VHT) MIMO mode Ant1_5750

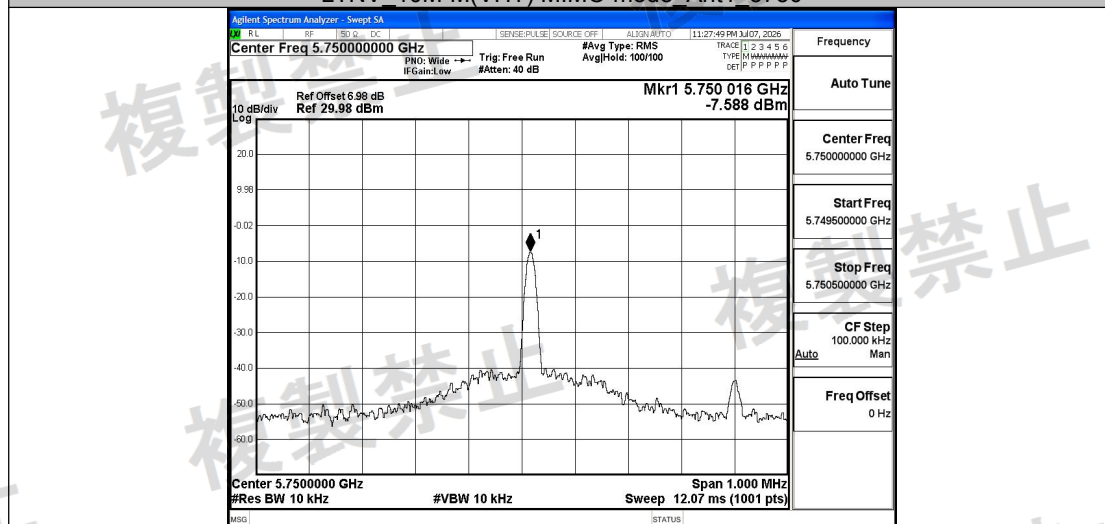


LTNV_10M-M(VHT) MIMO mode Ant2_5750

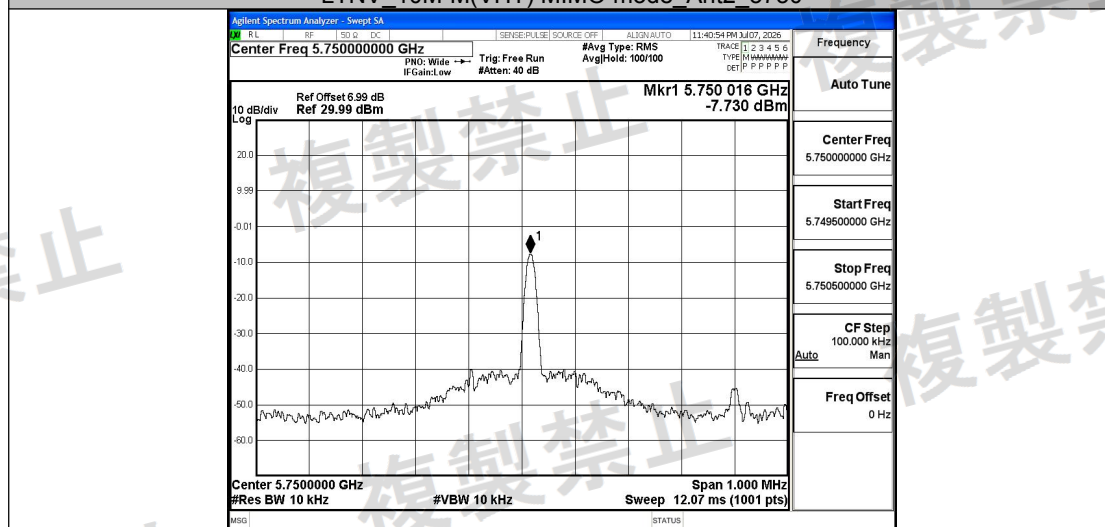



Test Graphs HTNV 10MHz

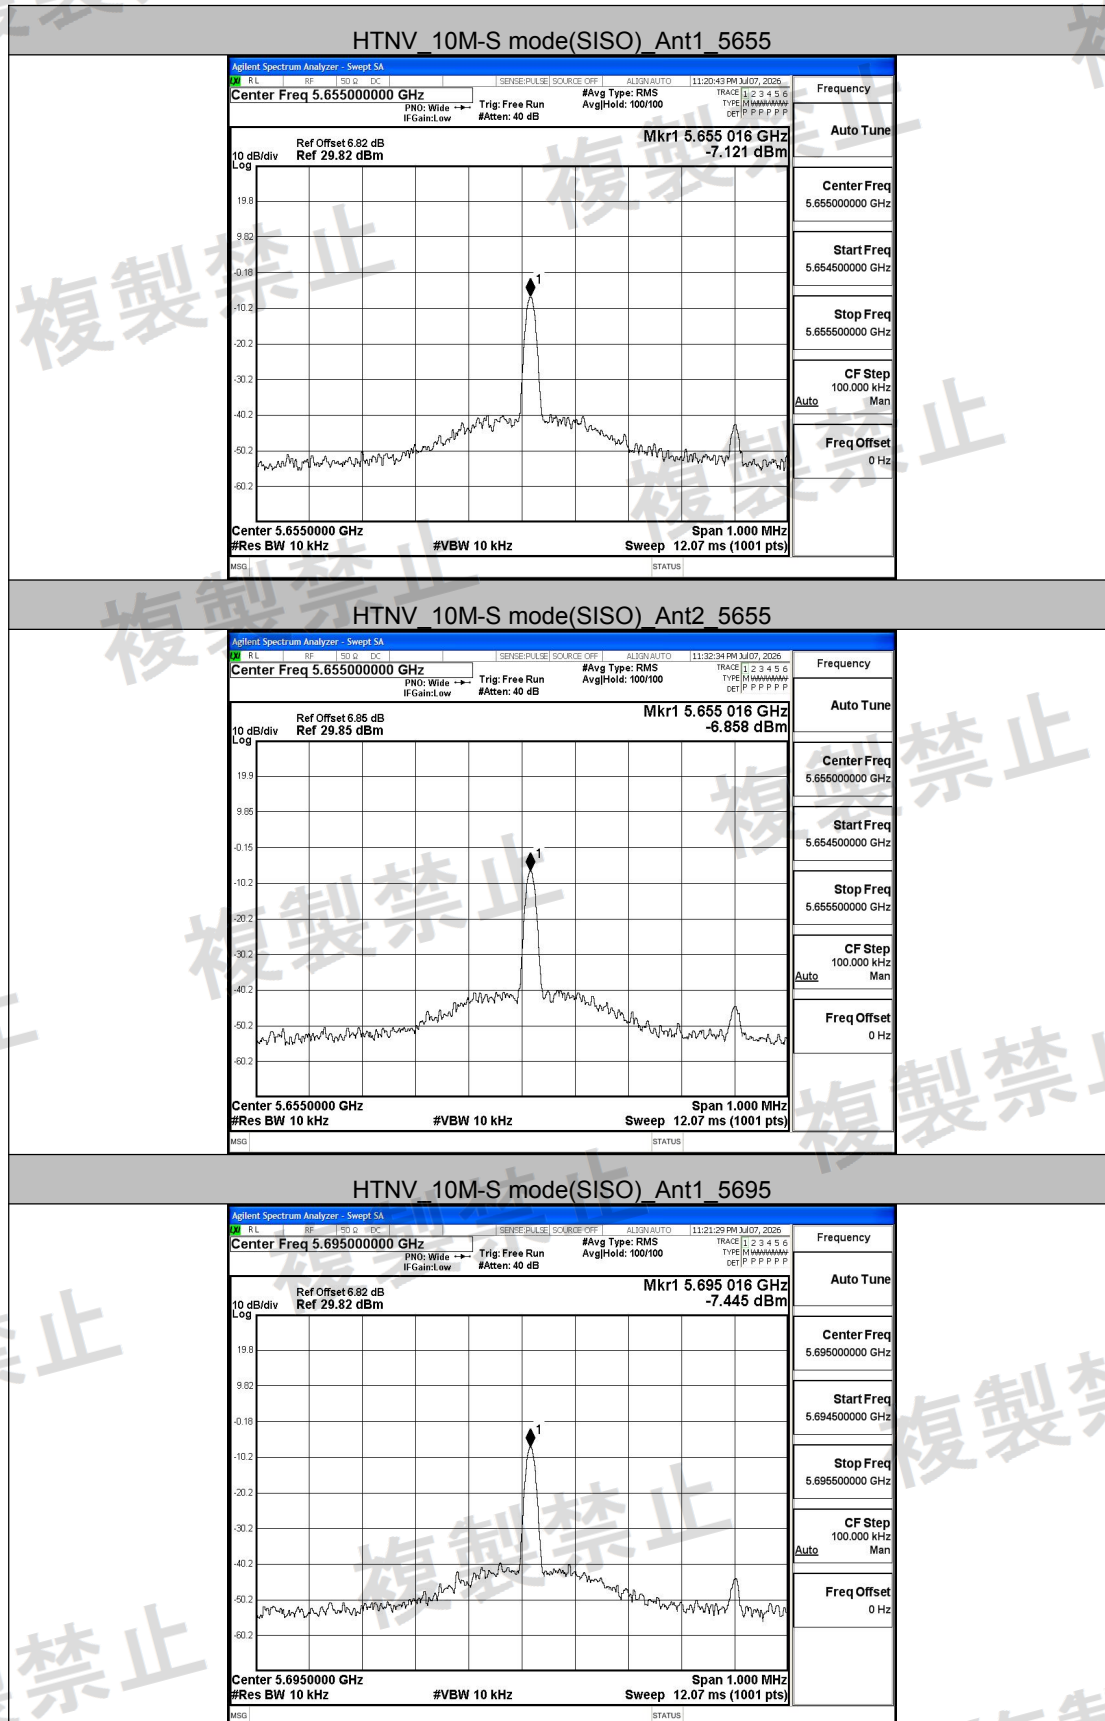

Guangdong DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang 'an Town, Dongguan City, Guangdong P.R.China


Web: www.dn-testing.com

Tel: +86-769-88087383


E-mail: service@dn-testing.com




HTNV_10M-S mode(SISO) Ant2 5695

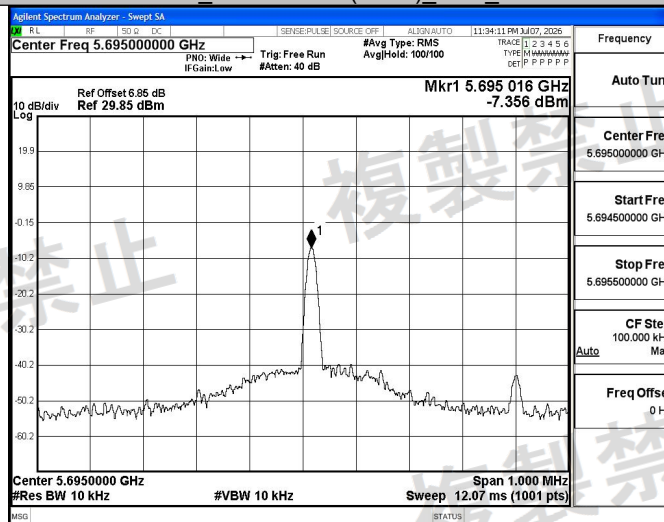

HTNV_10M-S mode(SISO) Ant1 5750

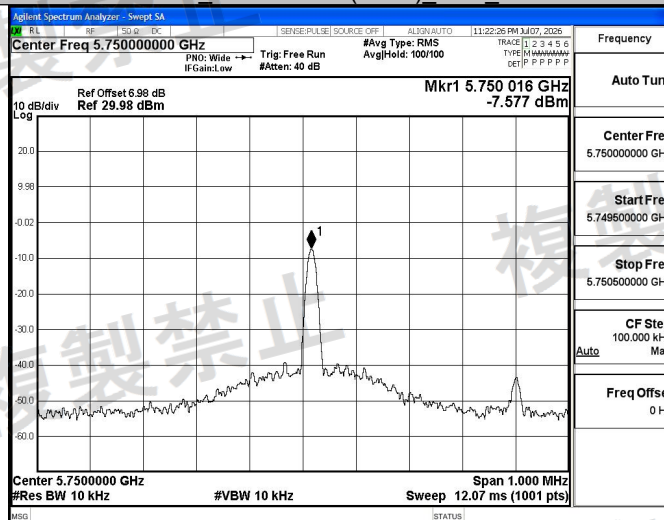

HTNV_10M-S mode(SISO) Ant2 5750

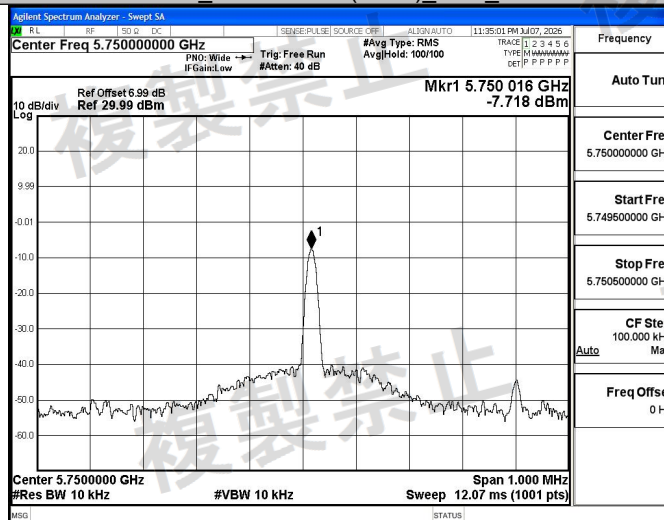

HTNV_10M-M(HT) MIMO mode Ant1 5655


Guangdong DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang 'an Town, Dongguan City, Guangdong P.R.China


Web: www.dn-testing.com

Tel: +86-769-88087383


E-mail: service@dn-testing.com

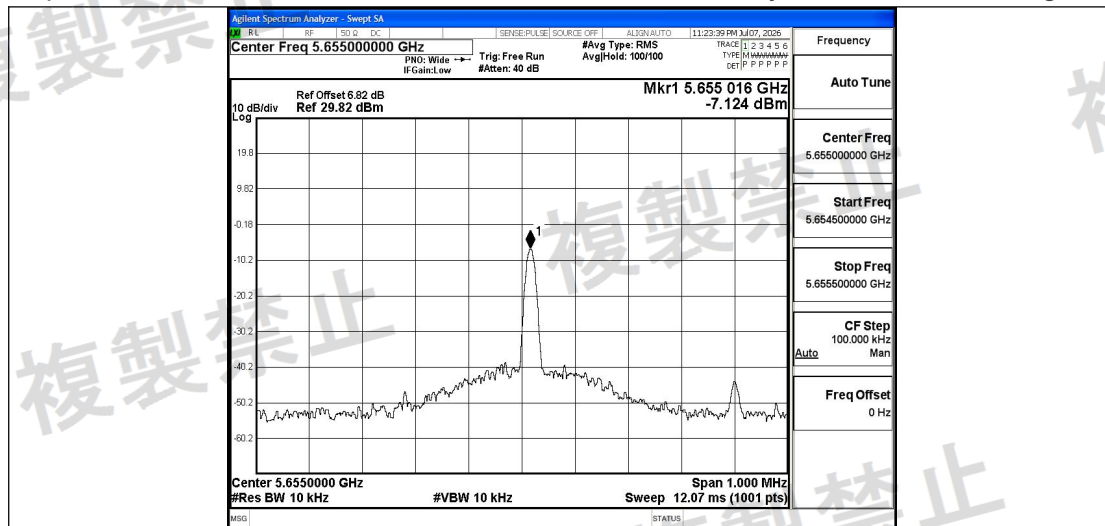


HTNV_10M-M(HT) MIMO mode_Ant2_5655

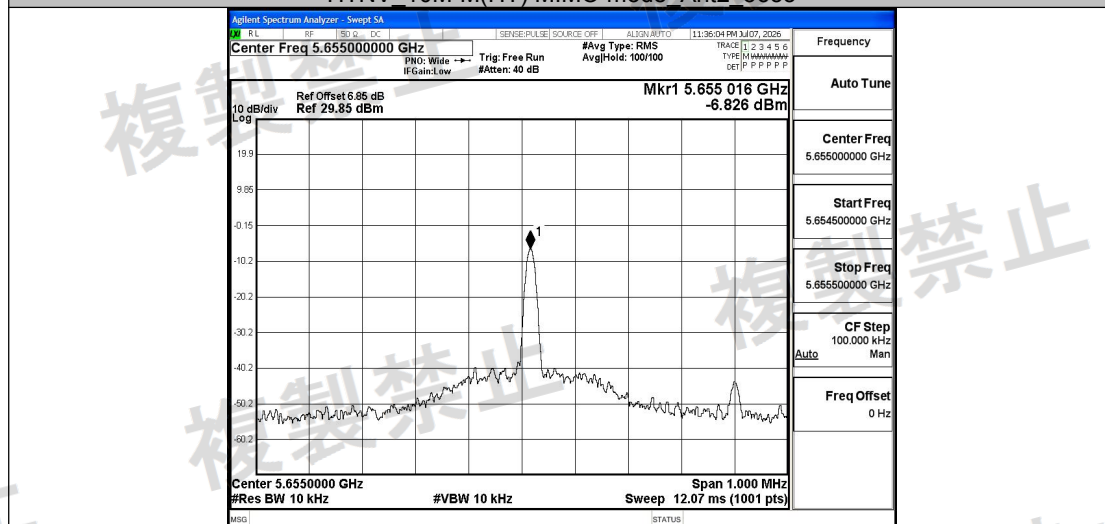


HTNV_10M-M(HT) MIMO mode_Ant1_5695

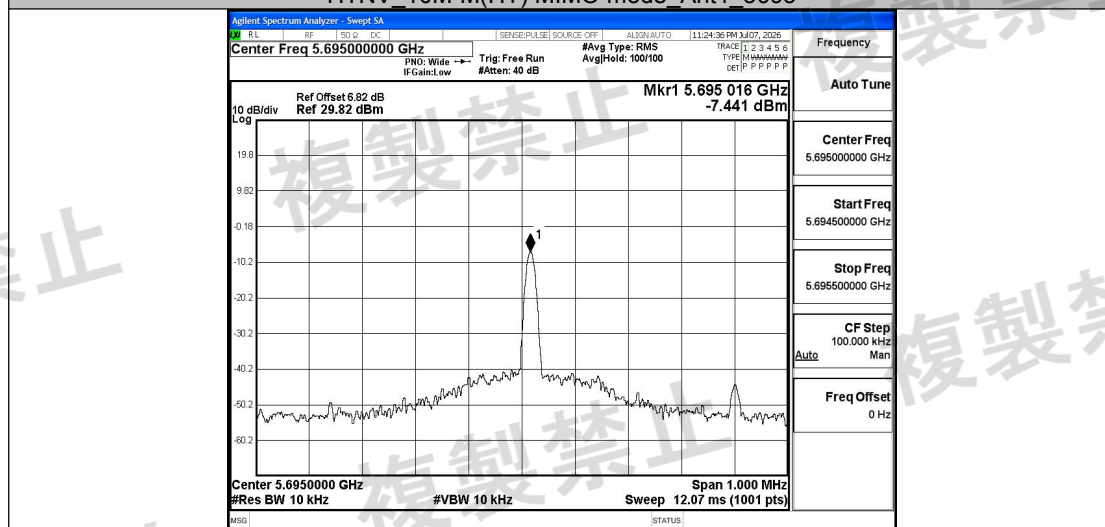


HTNV_10M-M(HT) MIMO mode_Ant2_5695

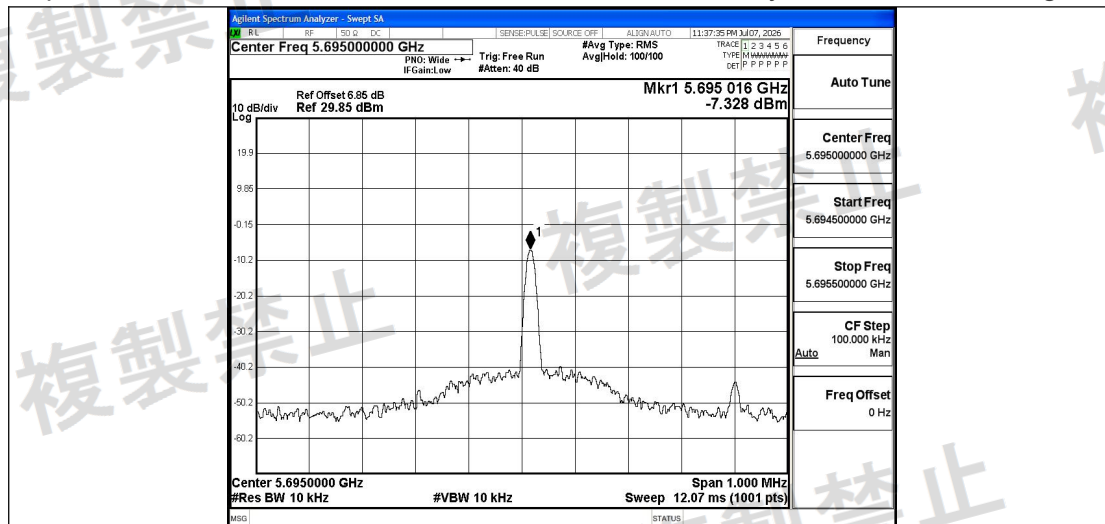


HTNV 10M-M(HT) MIMO mode_Ant1_5750

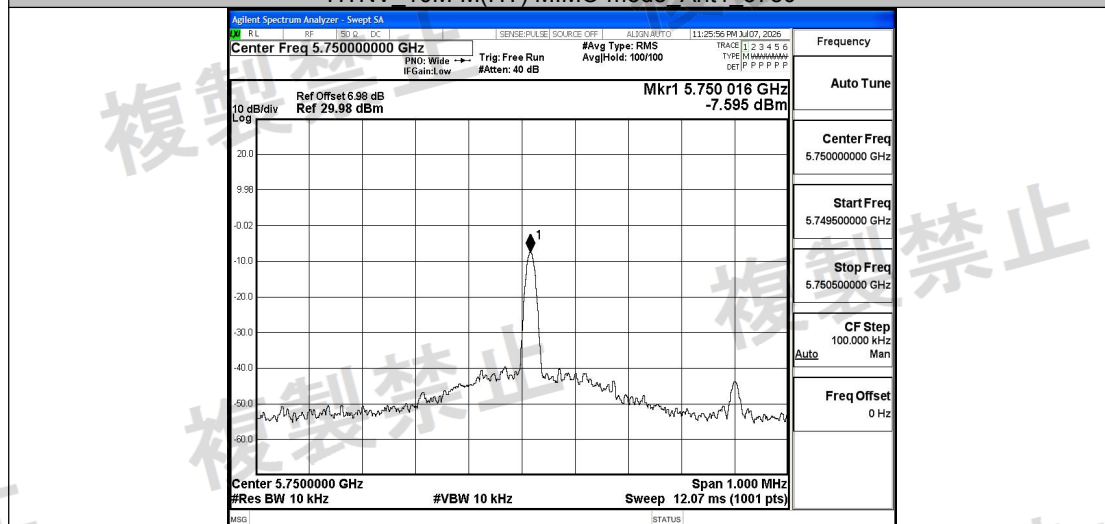


HTNV 10M-M(HT) MIMO mode_Ant2_5750

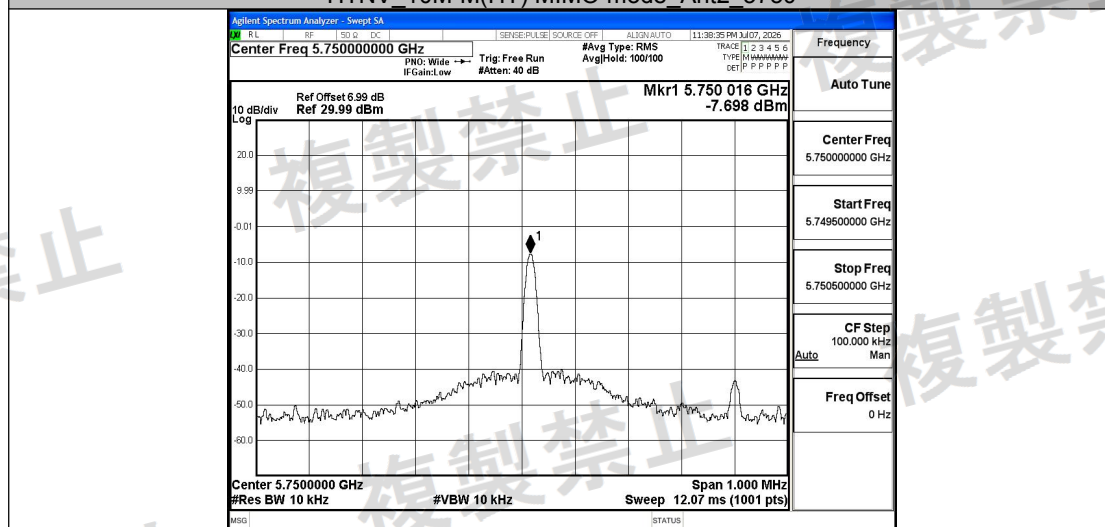


HTNV 10M-M(VHT) MIMO mode_Ant1_5655

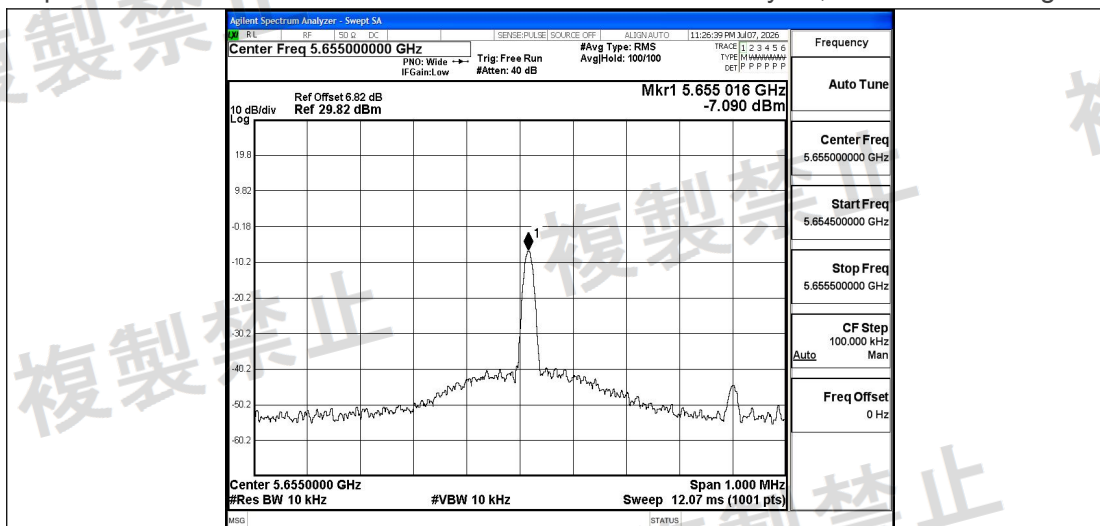


HTNV 10M-M(VHT) MIMO mode Ant2 5655

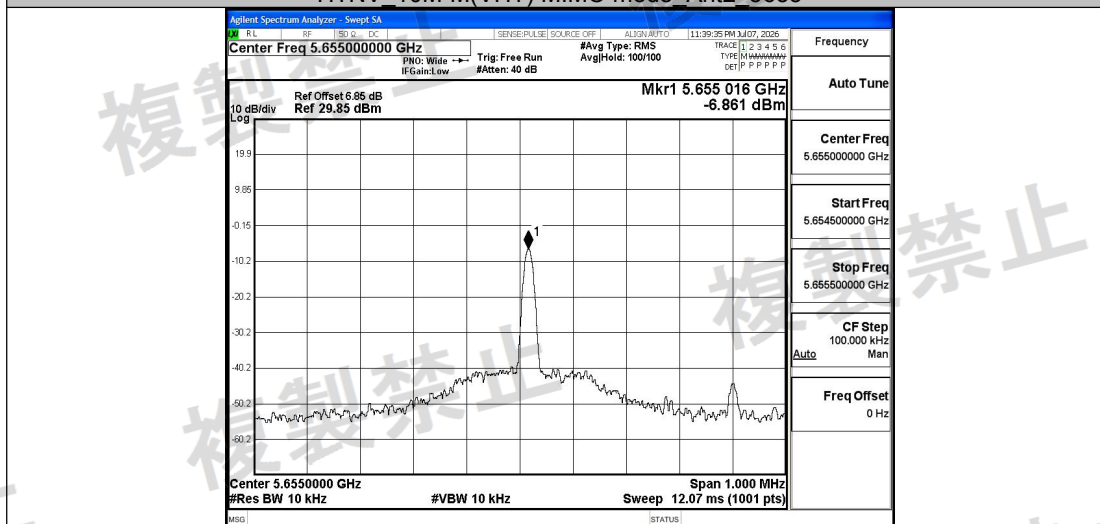


HTNV 10M-M(VHT) MIMO mode Ant1 5695

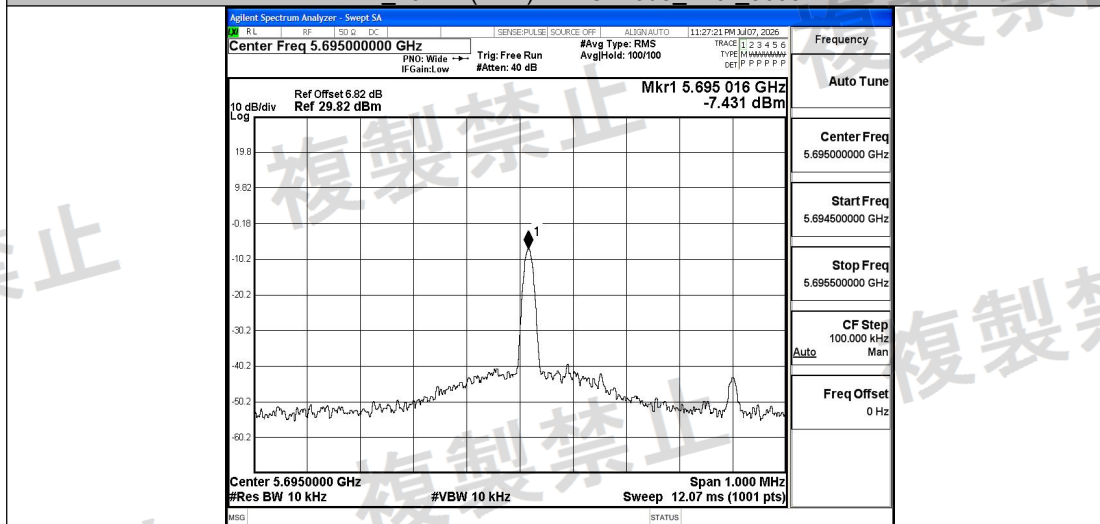


HTNV 10M-M(VHT) MIMO mode Ant2 5695

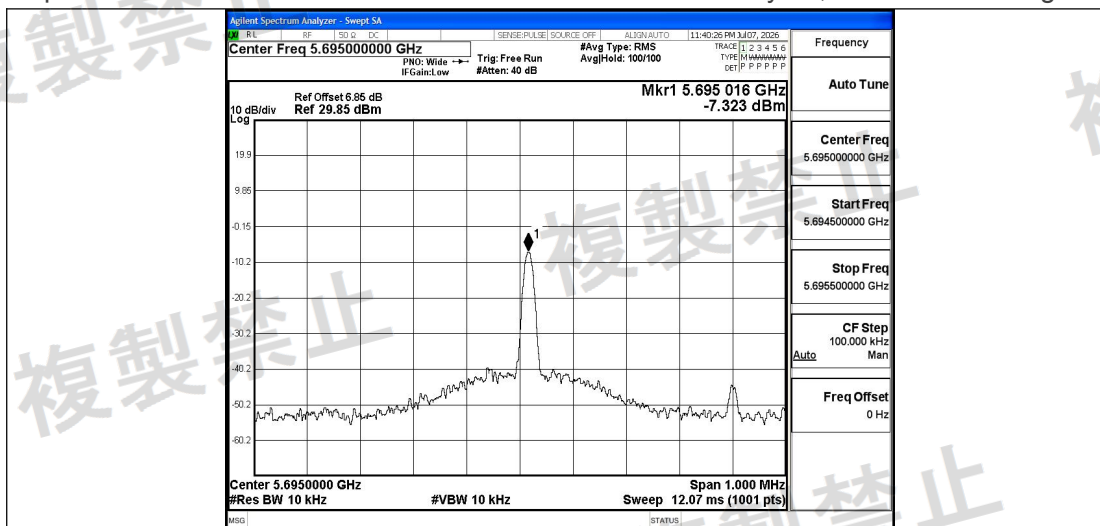

HTNV_10M-M(VHT) MIMO mode Ant1 5750

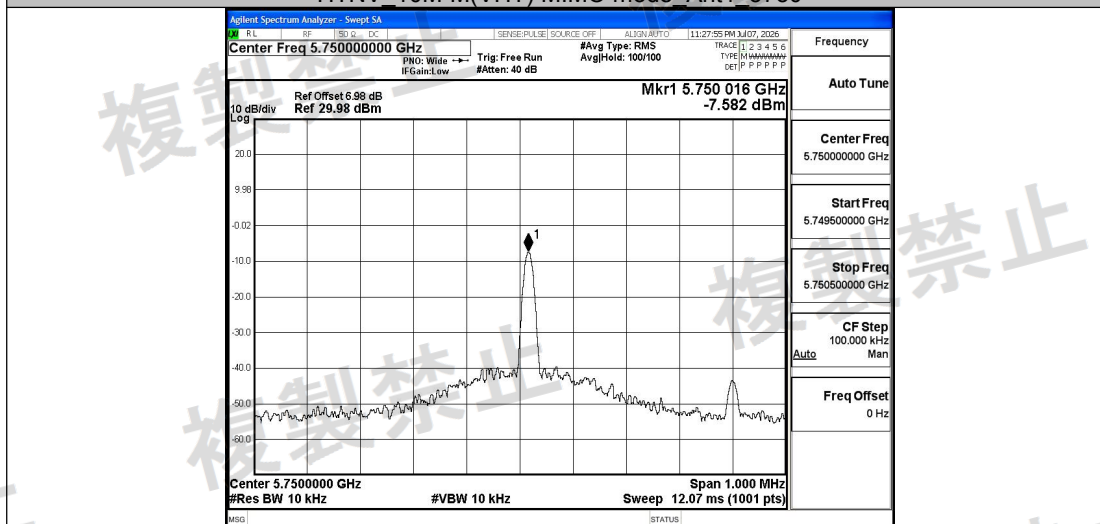


HTNV_10M-M(VHT) MIMO mode Ant2 5750

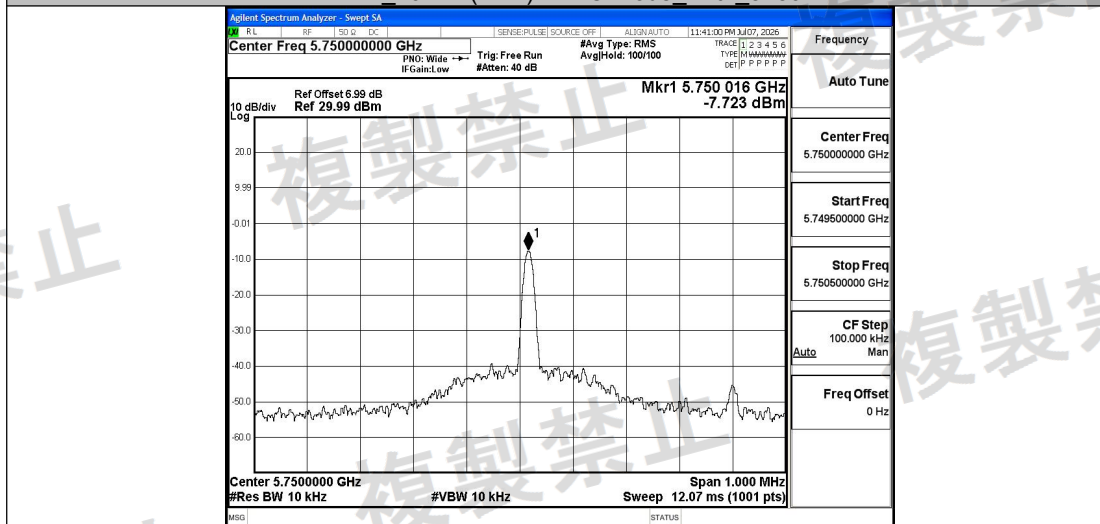



Test Graphs Humidity 10MHz

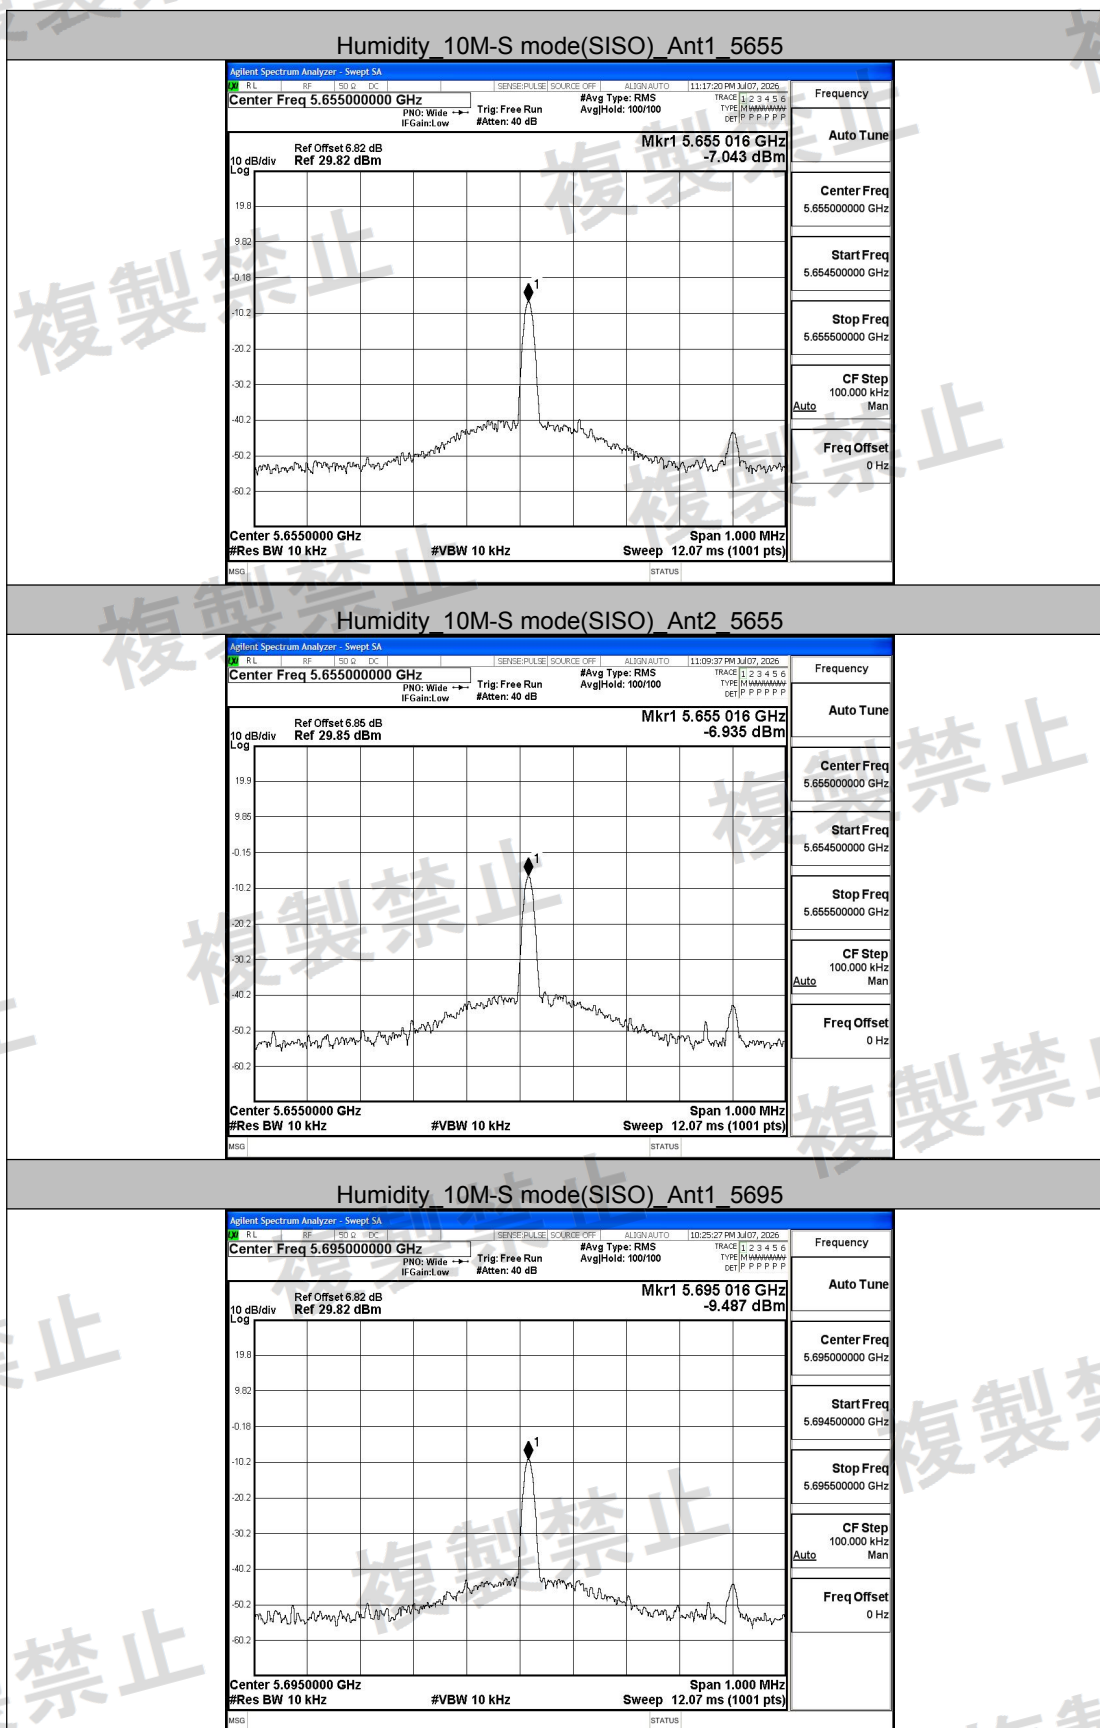

Guangdong DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang 'an Town, Dongguan City, Guangdong P.R.China


Web: www.dn-testing.com

Tel: +86-769-88087383


E-mail: service@dn-testing.com




Humidity_10M-S mode(SISO)_Ant2_5695

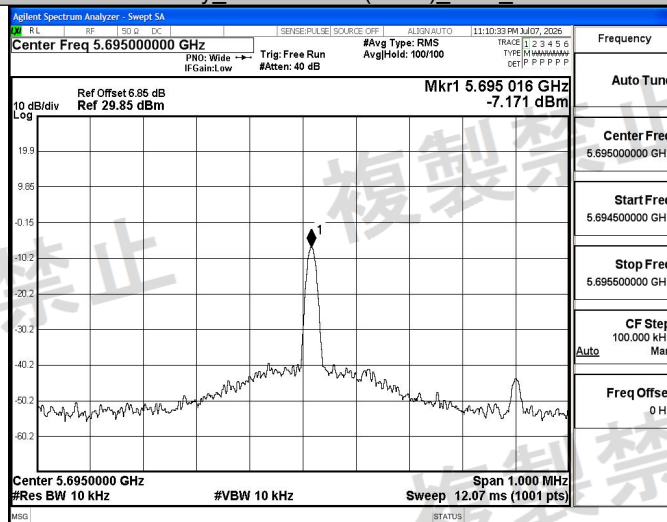

Humidity_10M-S mode(SISO)_Ant1_5750

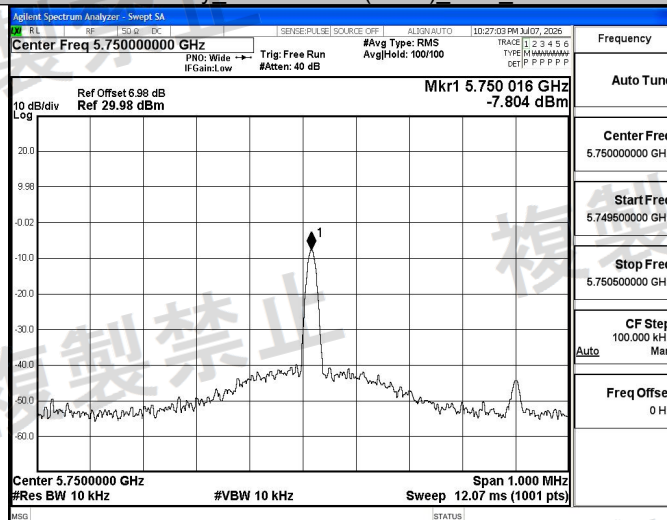

Humidity_10M-S mode(SISO)_Ant2_5750

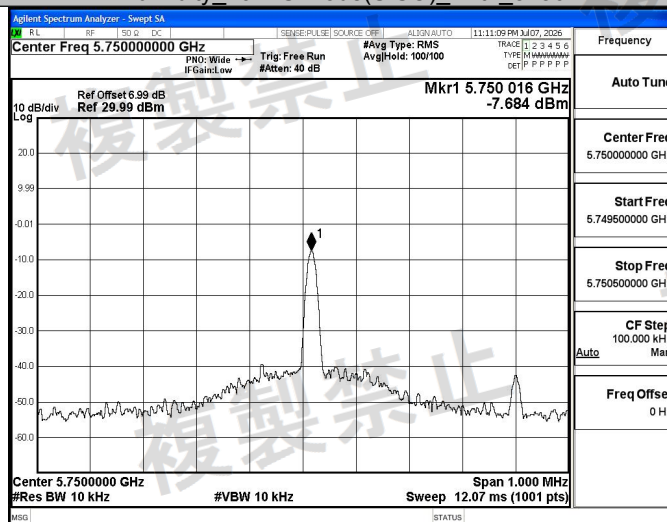

Humidity_10M-M(HT) MIMO mode_Ant1_5655


Guangdong DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang 'an Town, Dongguan City, Guangdong P.R.China


Web: www.dn-testing.com

Tel: +86-769-88087383


E-mail: service@dn-testing.com

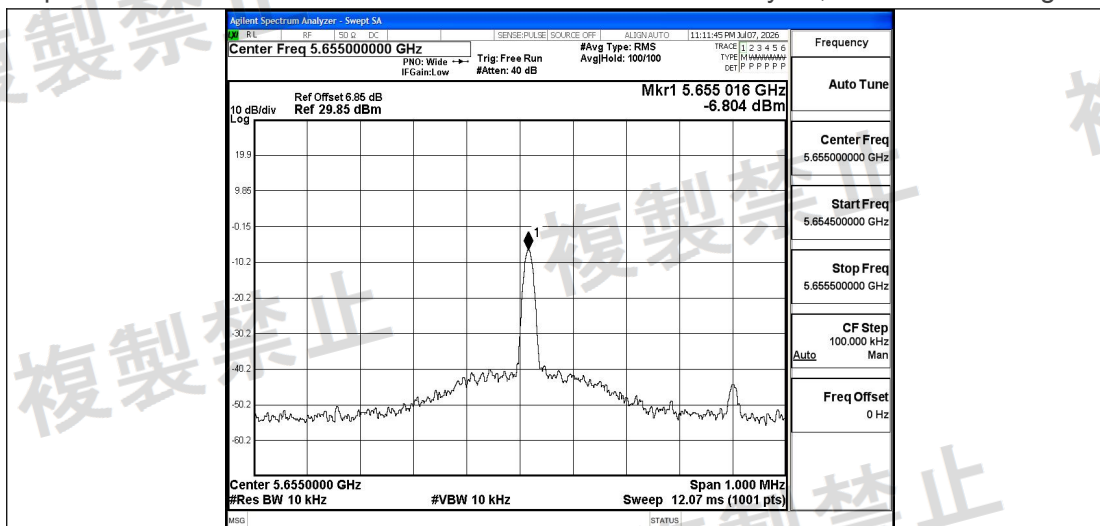


Humidity 10M-M(HT) MIMO mode Ant2 5655

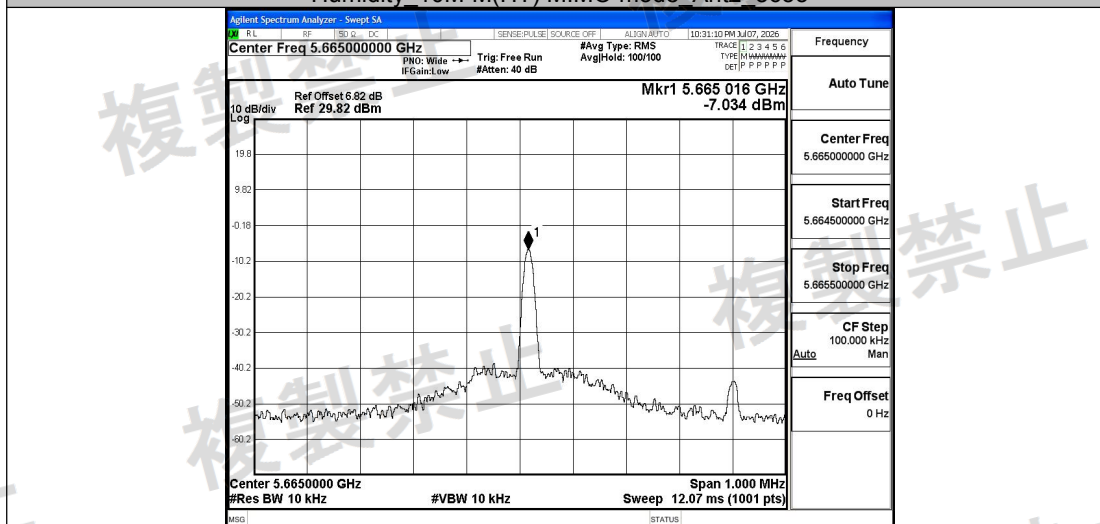


Humidity 10M-M(HT) MIMO mode Ant1 5695

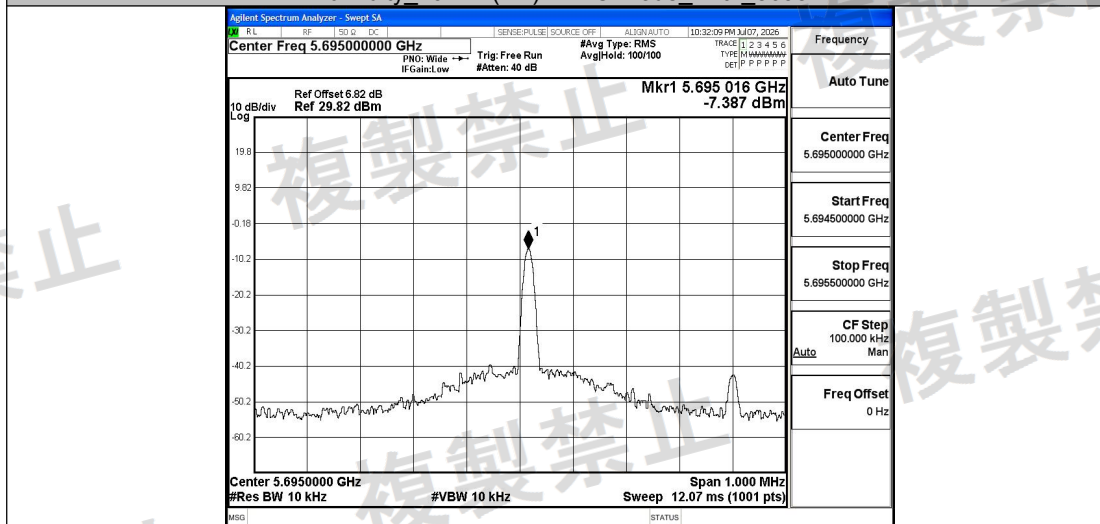


Humidity 10M-M(HT) MIMO mode Ant2 5695

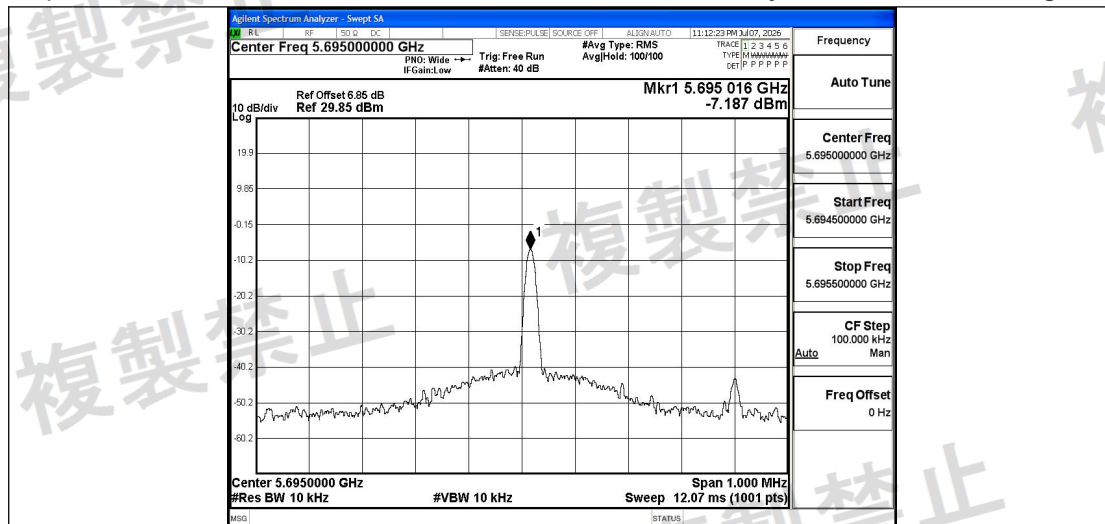


Humidity 10M-M(HT) MIMO mode Ant1 5750

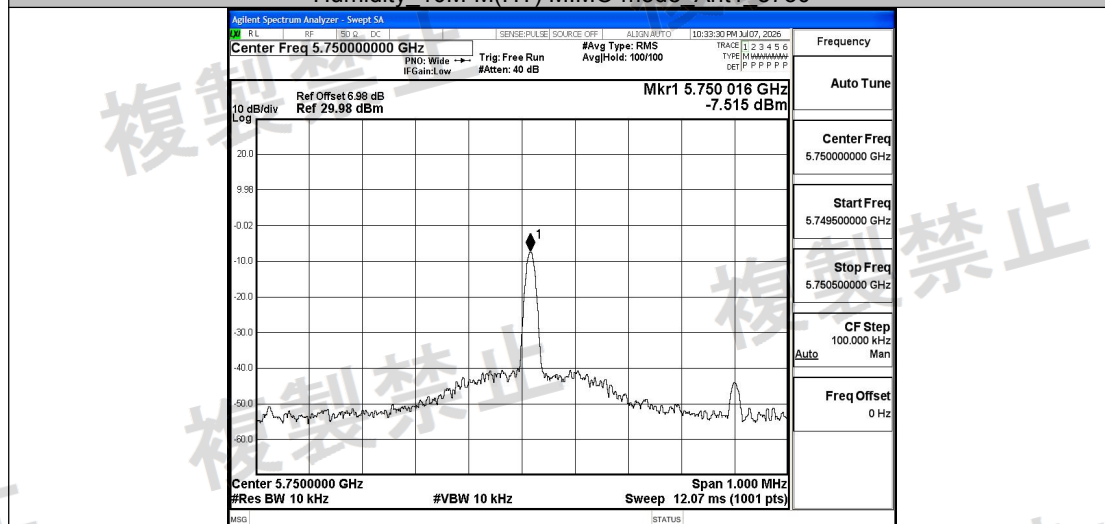


Humidity 10M-M(HT) MIMO mode Ant2 5750

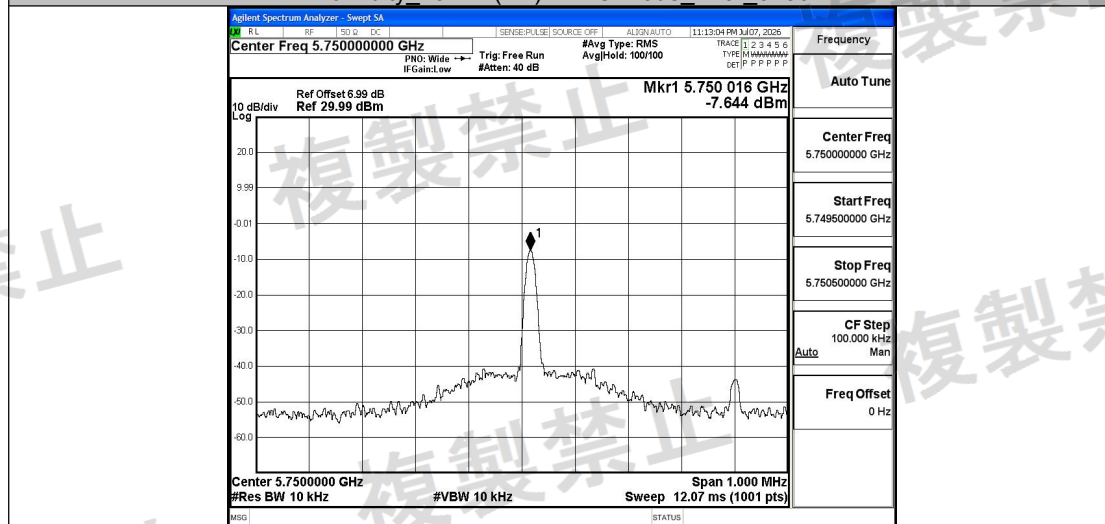


Humidity 10M-M(VHT) MIMO mode Ant1 5655

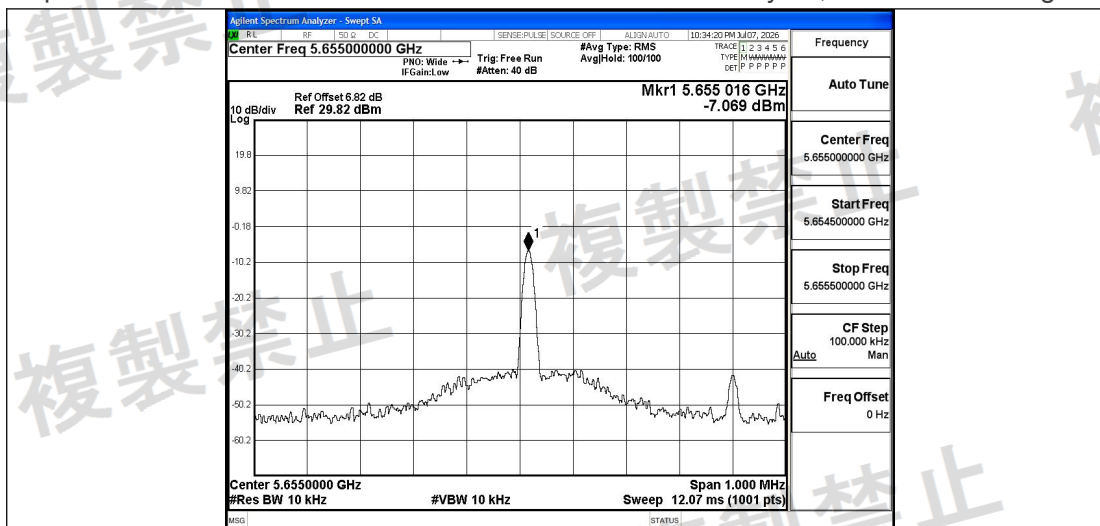


Humidity_10M-M(VHT) MIMO mode Ant2 5655

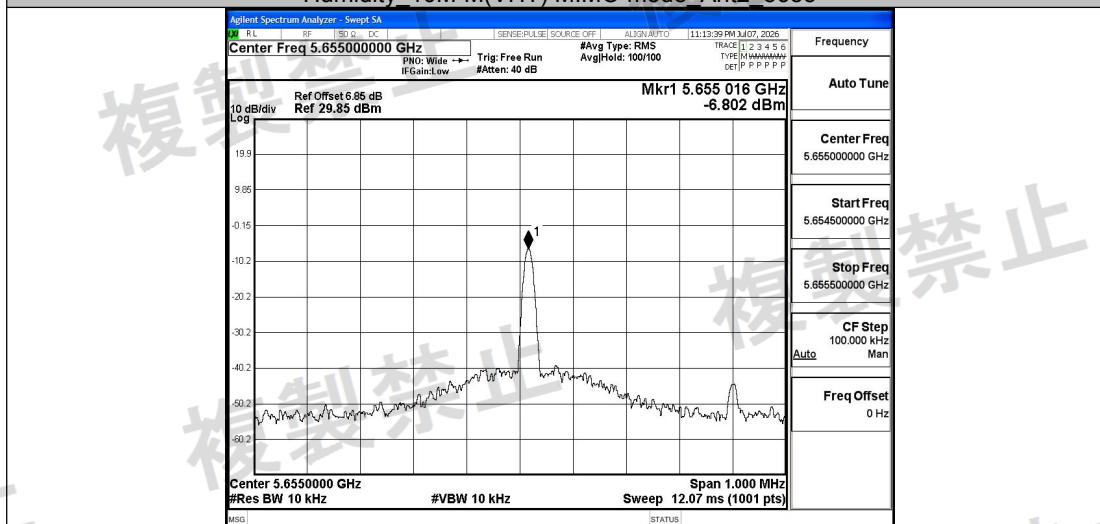


Humidity_10M-M(VHT) MIMO mode Ant1 5695

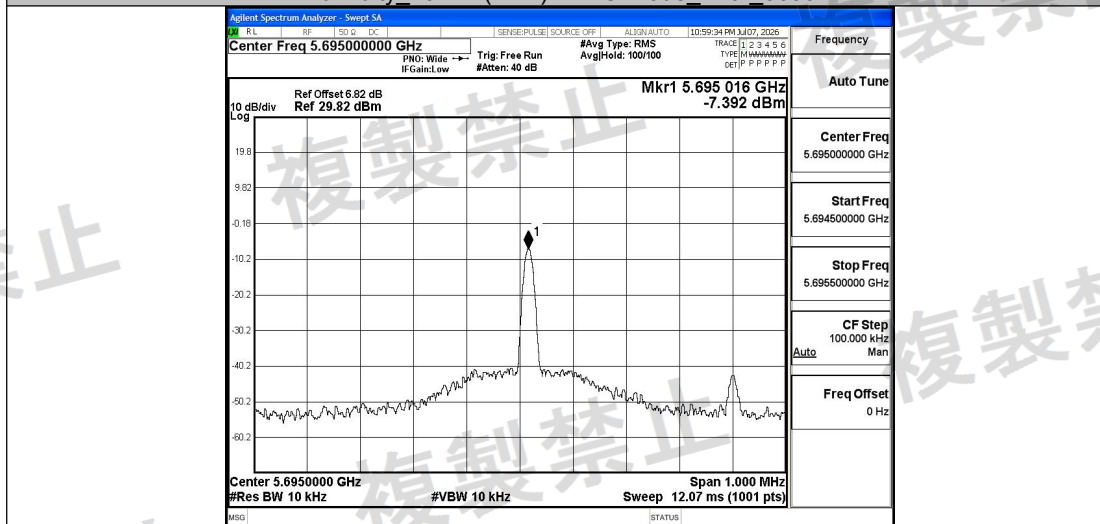


Humidity_10M-M(VHT) MIMO mode Ant2 5695

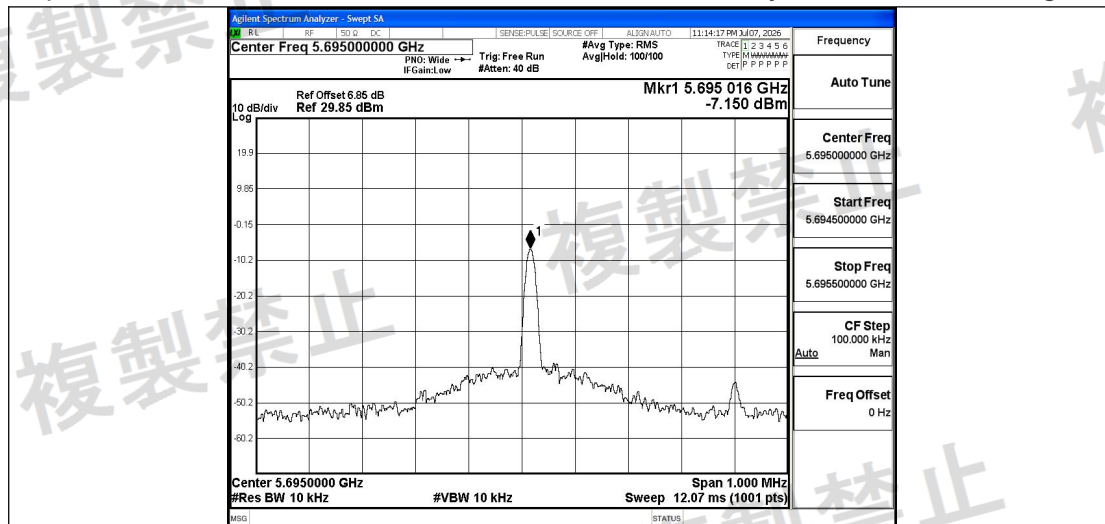

Humidity_10M-M(VHT) MIMO mode Ant1_5750

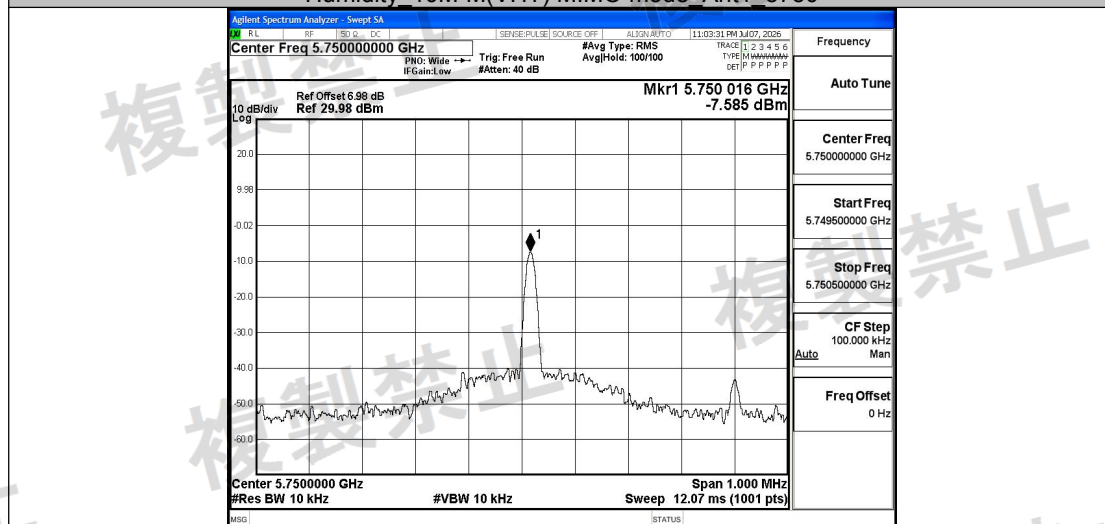


Humidity_10M-M(VHT) MIMO mode Ant2_5750

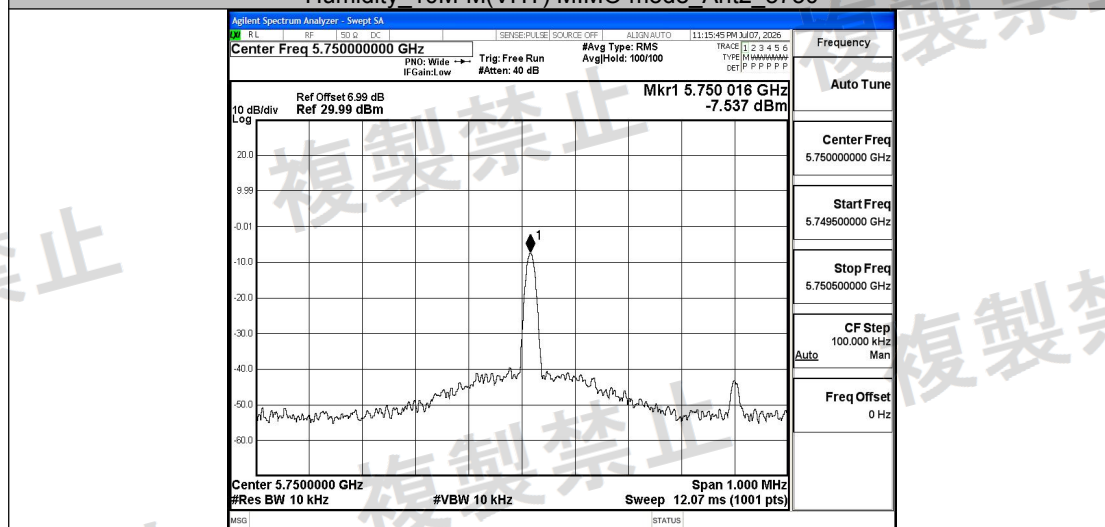



Test Graphs Vibration 10MHz

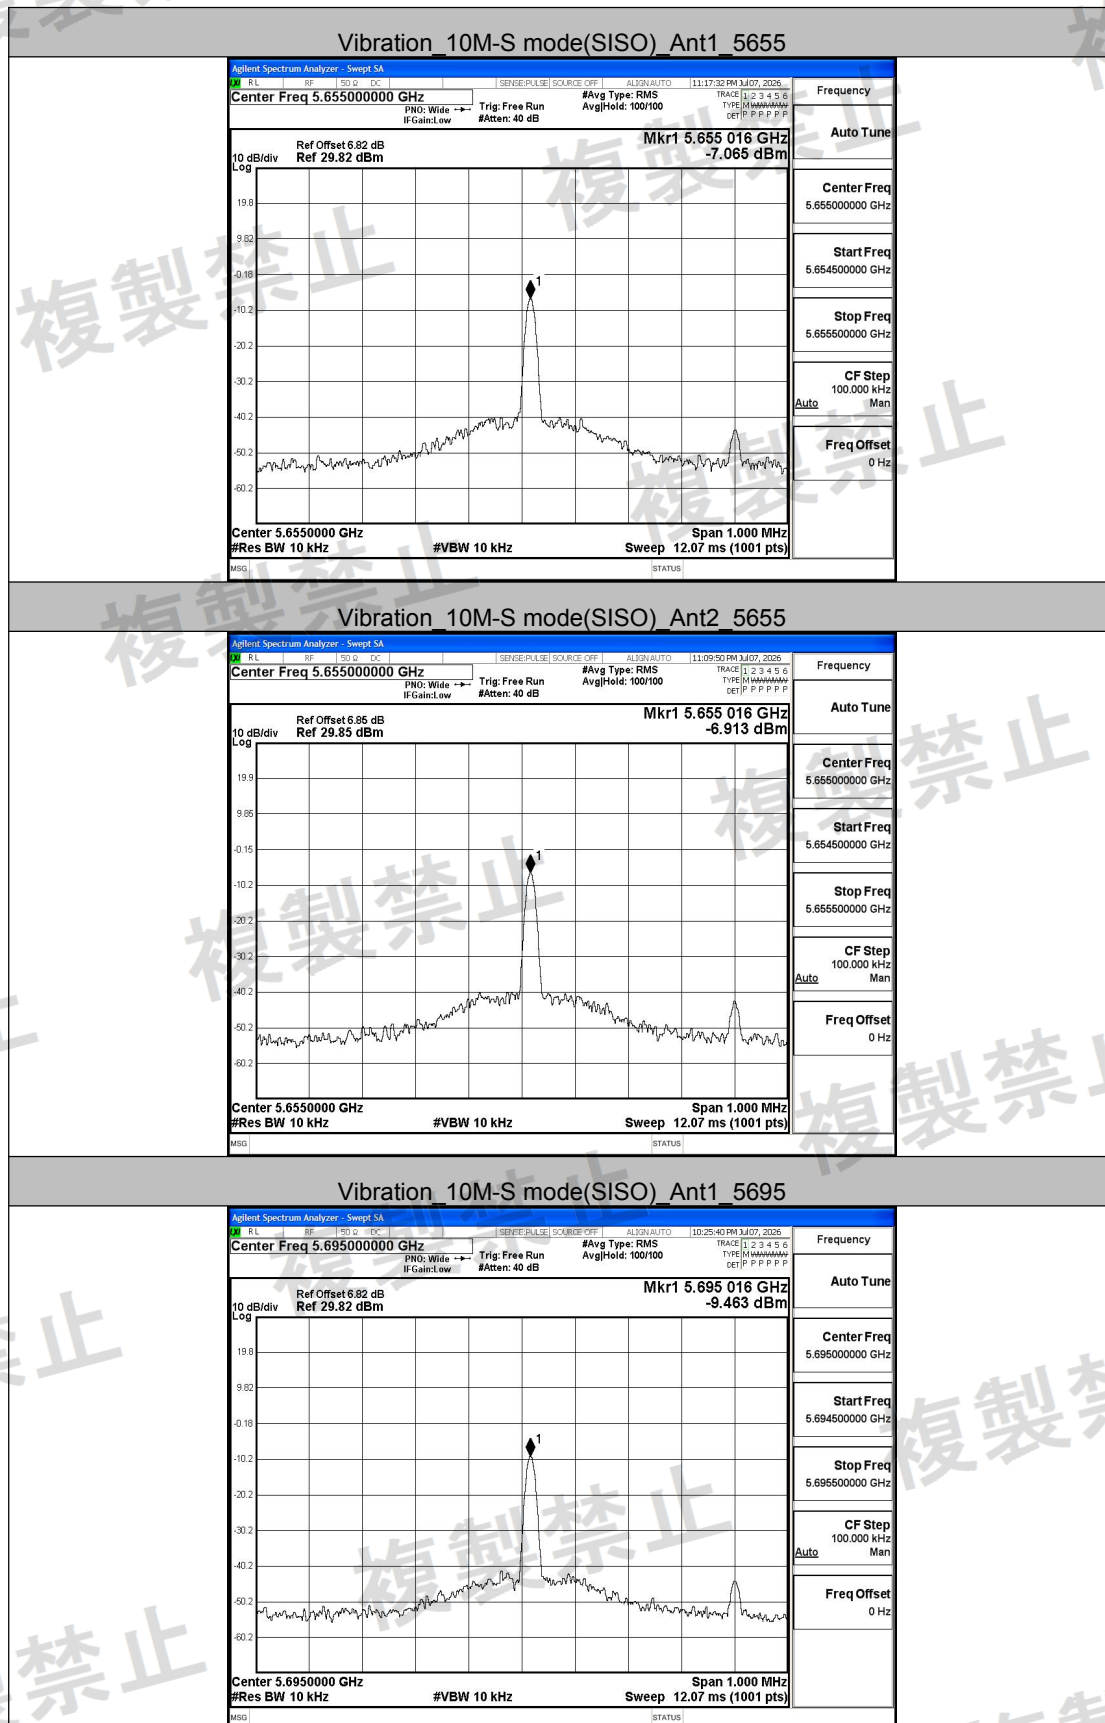

Guangdong DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang 'an Town, Dongguan City, Guangdong P.R.China


Web: www.dn-testing.com

Tel: +86-769-88087383


E-mail: service@dn-testing.com




Vibration_10M-S mode(SISO)_Ant2_5695

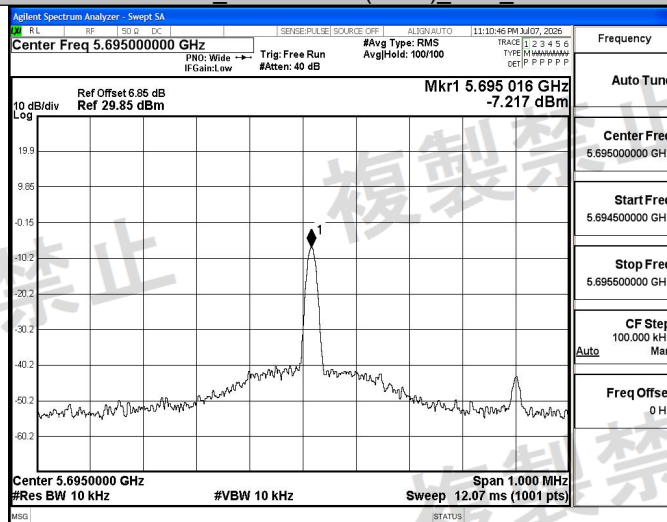

Vibration_10M-S mode(SISO)_Ant1_5750

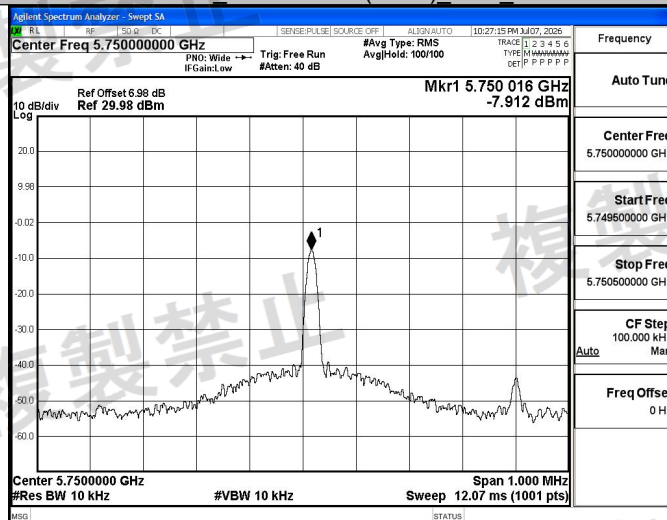

Vibration_10M-S mode(SISO)_Ant2_5750

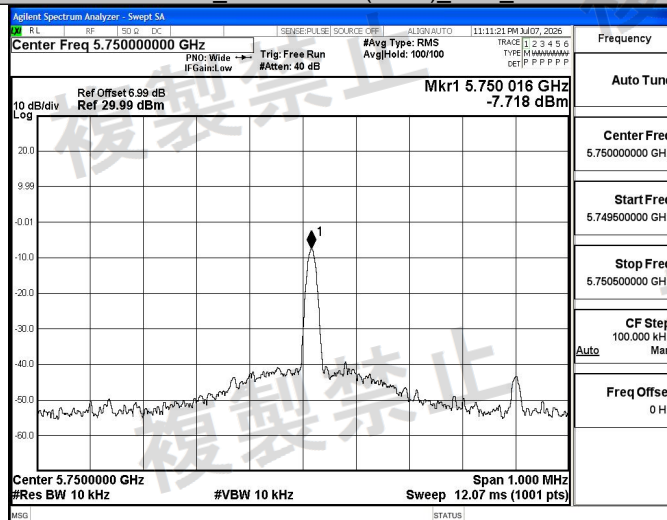

Vibration_10M-M(HT) MIMO mode_Ant1_5655


Guangdong DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang 'an Town, Dongguan City, Guangdong P.R.China


Web: www.dn-testing.com

Tel: +86-769-88087383


E-mail: service@dn-testing.com

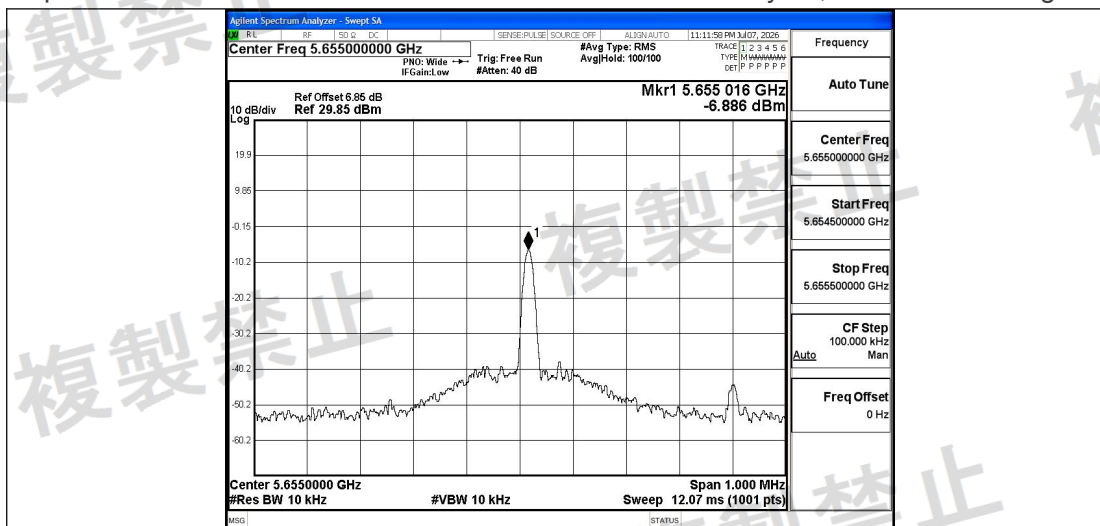


Vibration_10M-M(HT) MIMO mode_Ant2_5655

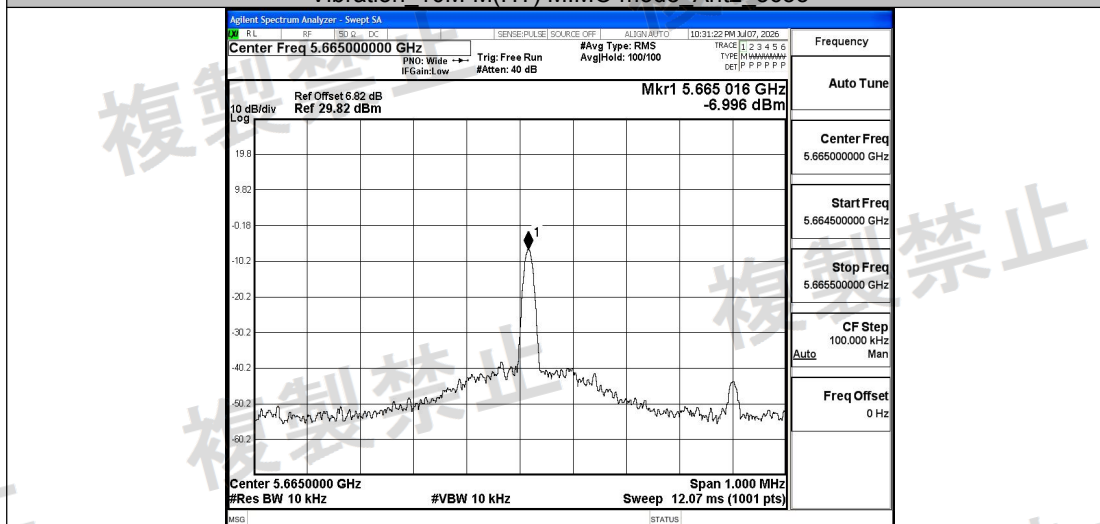


Vibration_10M-M(HT) MIMO mode_Ant1_5695

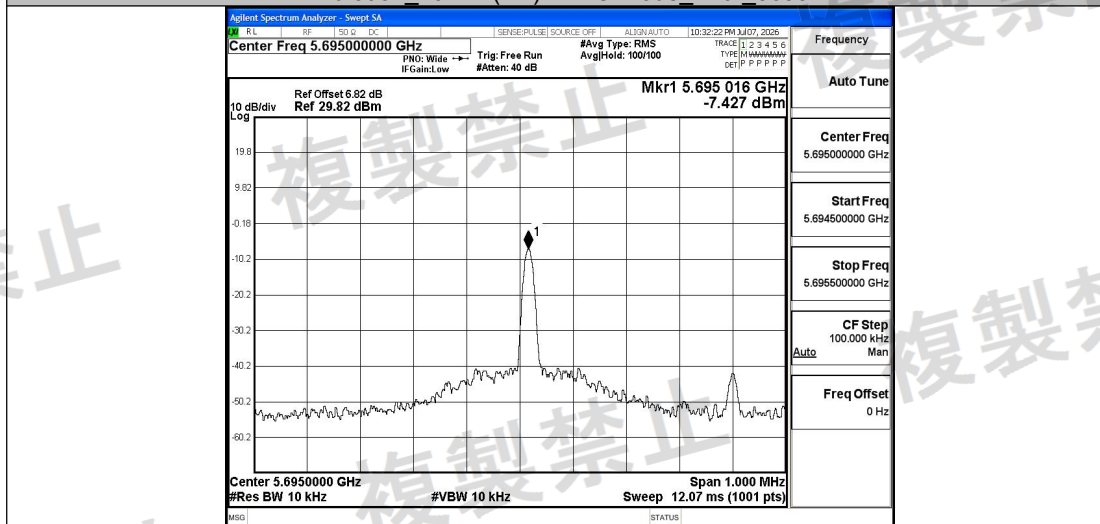


Vibration_10M-M(HT) MIMO mode_Ant2_5695

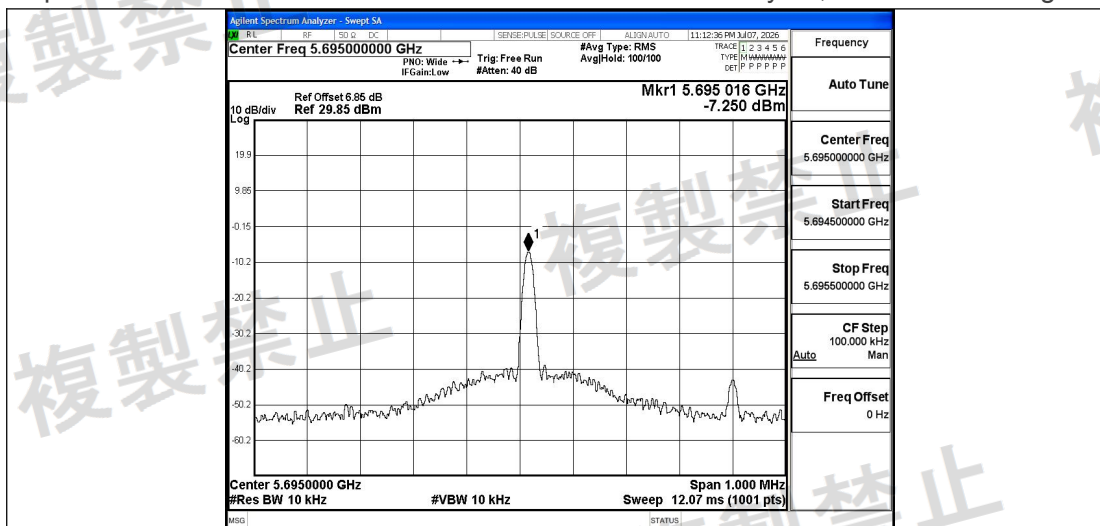


Vibration_10M-M(HT) MIMO mode_Ant1_5750

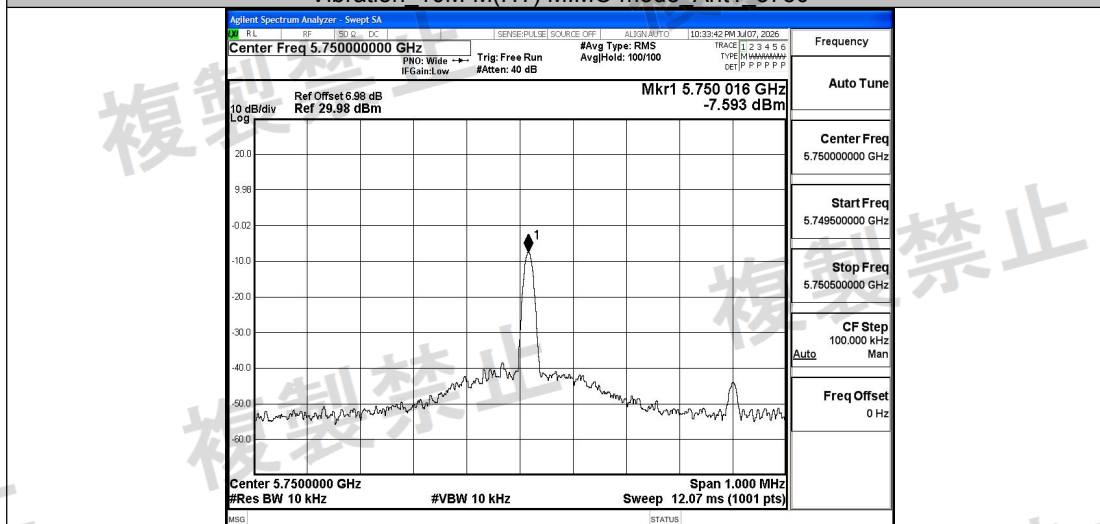


Vibration_10M-M(HT) MIMO mode_Ant2_5750

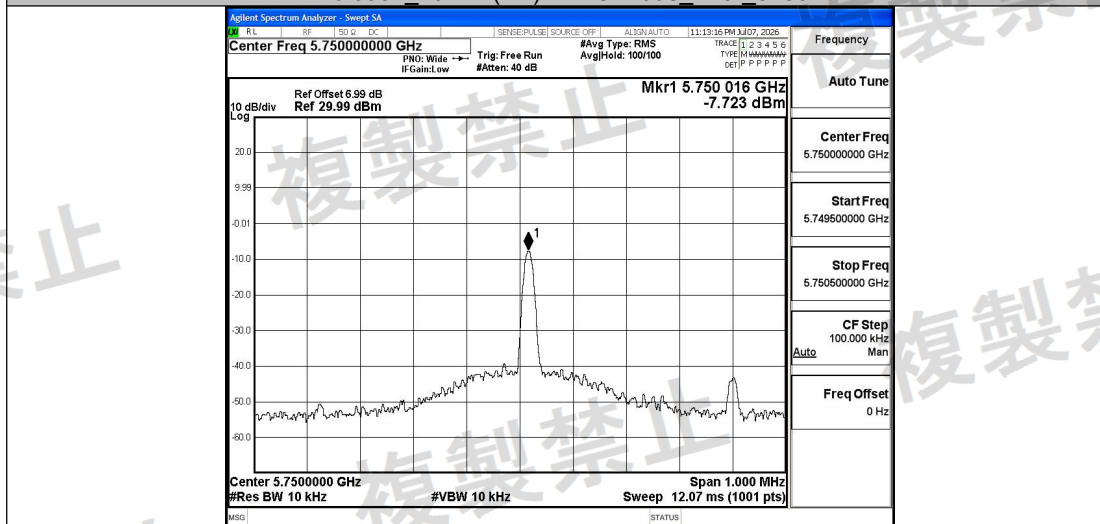


Vibration_10M-M(VHT) MIMO mode_Ant1_5655

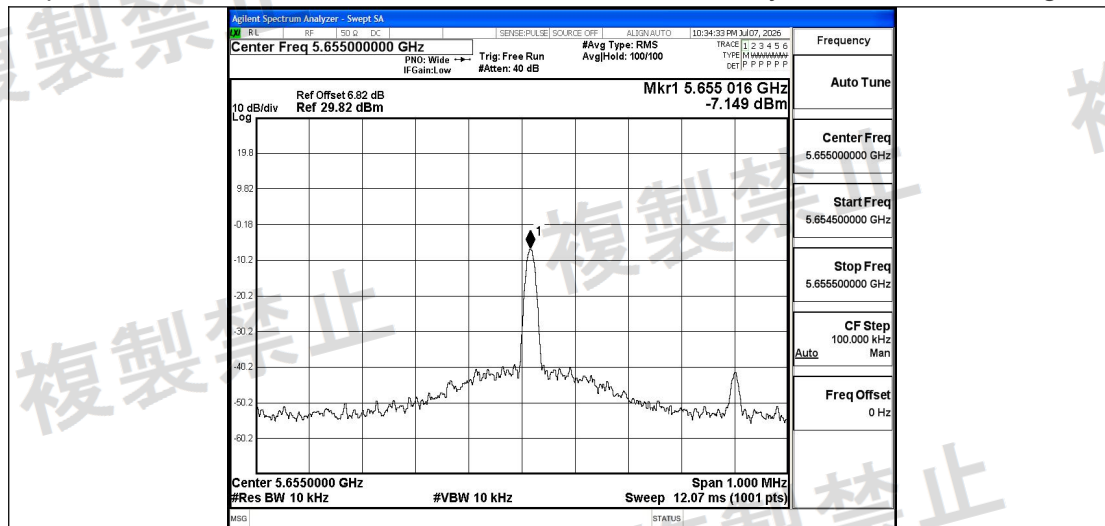


Vibration_10M-M(VHT) MIMO mode_Ant2_5655

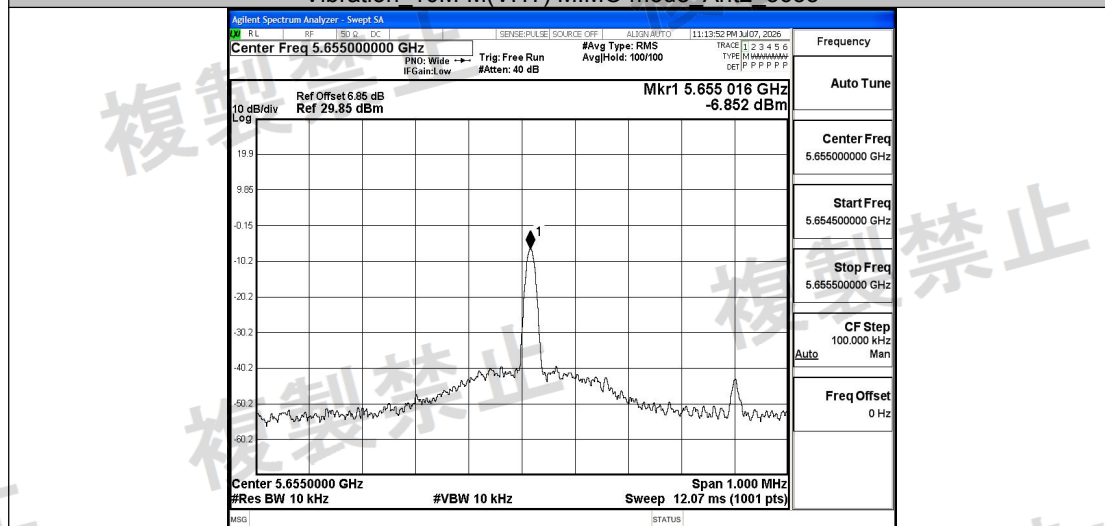


Vibration_10M-M(VHT) MIMO mode_Ant1_5695

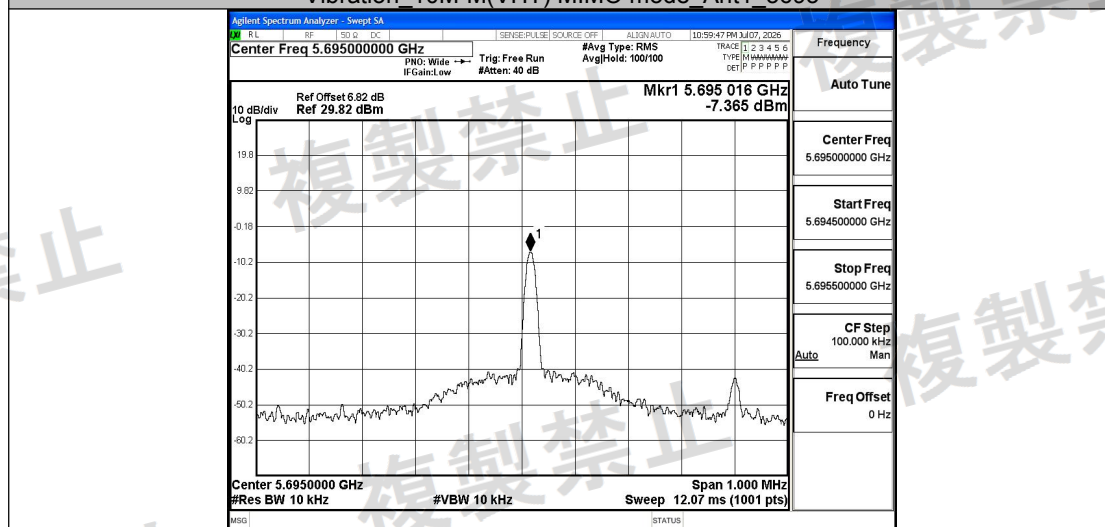


Vibration_10M-M(VHT) MIMO mode_Ant2_5695

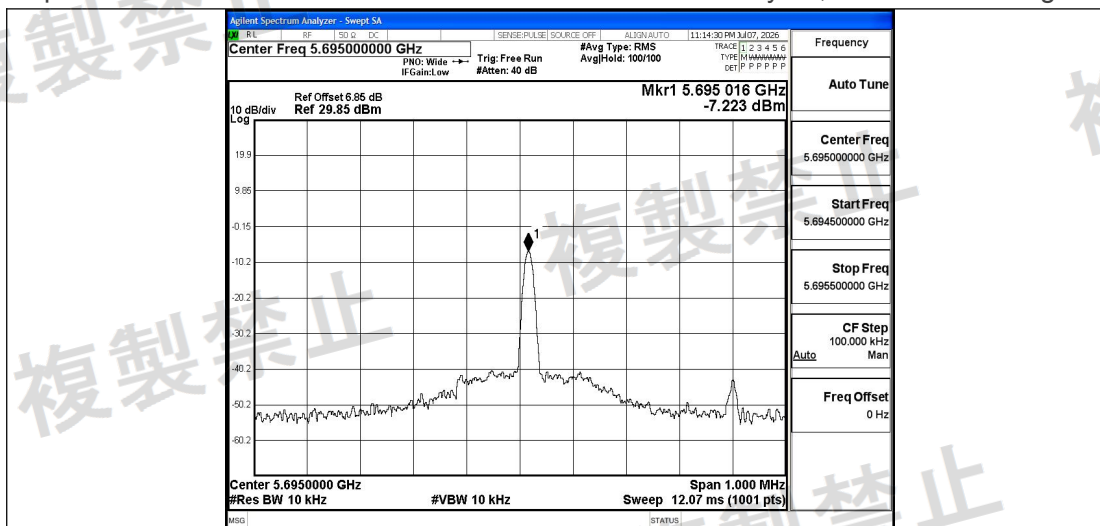

Vibration_10M-M(VHT) MIMO mode Ant1 5750

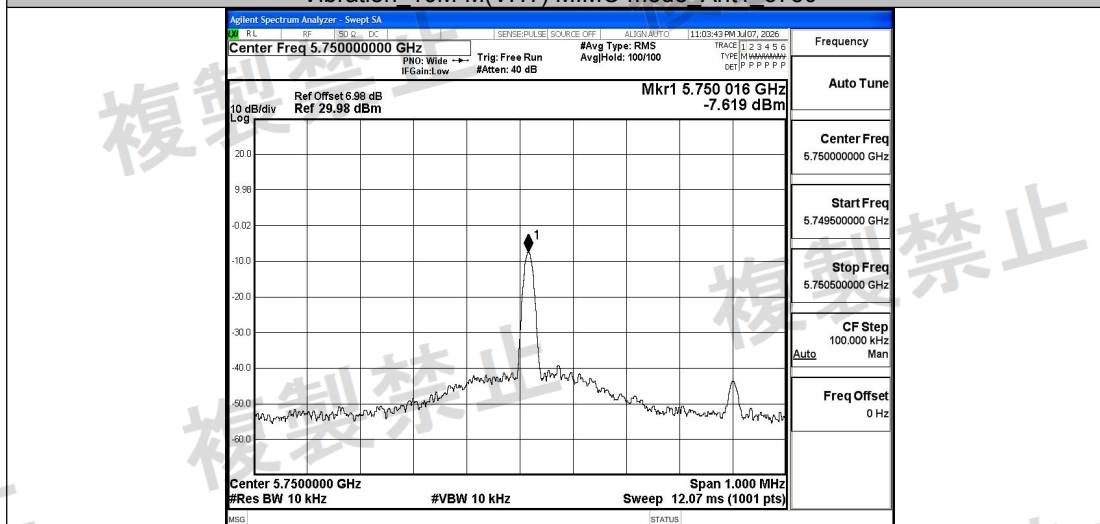

Vibration_10M-M(VHT) MIMO mode Ant2 5750

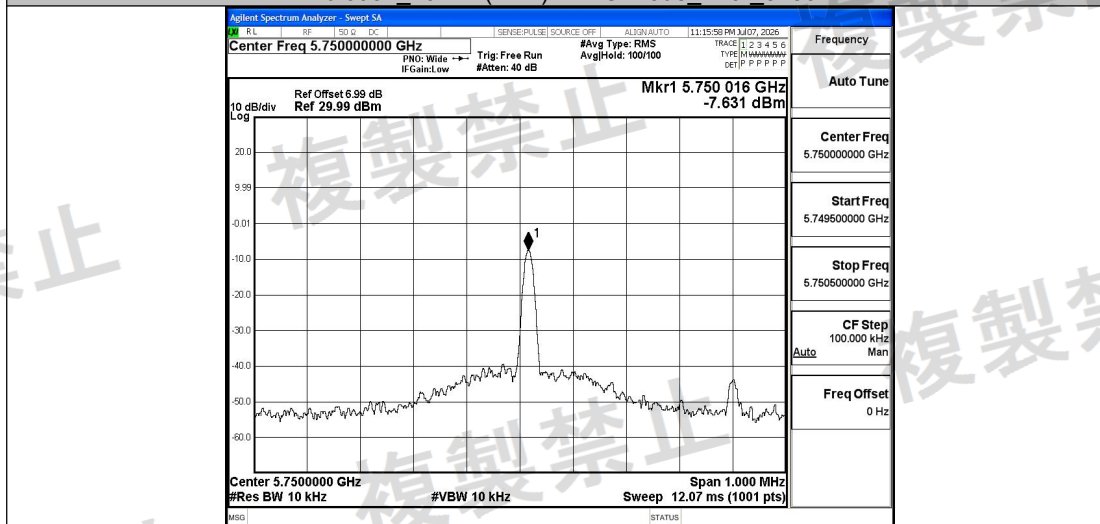



Test Result NTV 20MHz

TestCondition	TestMode	Antenna	Freq(MHz)	CenterFreq [MHz]	Result [ppm]	Limit [ppm]	Verdict
NTNV	20M-S mode(SISO)	Ant1	5660	5660.017	3.00353	±20	PASS
		Ant2	5660	5660.017	3.00353	±20	PASS
		Ant1	5700	5700.017	2.98246	±20	PASS
		Ant2	5700	5700.017	2.98246	±20	PASS
		Ant1	5745	5745.017	2.95910	±20	PASS
		Ant2	5745	5745.017	2.95910	±20	PASS
	20M-M(HT) MIMO mode	Ant1	5660	5660.017	3.00353	±20	PASS
		Ant2	5660	5660.017	3.00353	±20	PASS
		Ant1	5700	5700.017	2.98246	±20	PASS
		Ant2	5700	5700.016	2.80702	±20	PASS
		Ant1	5745	5745.017	2.95910	±20	PASS
		Ant2	5745	5745.017	2.95910	±20	PASS
	20M-M(VHT) MIMO mode	Ant1	5660	5660.017	3.00353	±20	PASS
		Ant2	5660	5660.017	3.00353	±20	PASS
		Ant1	5700	5700.017	2.98246	±20	PASS
		Ant2	5700	5700.017	2.98246	±20	PASS
		Ant1	5745	5745.017	2.95910	±20	PASS
		Ant2	5745	5745.017	2.95910	±20	PASS



Test Result LTNV 20MHz

TestCondition	TestMode	Antenna	Freq(MHz)	CenterFreq [MHz]	Result [ppm]	Limit [ppm]	Verdict
LTNV	20M-S mode(SISO)	Ant1	5660	5660.017	3.00353	±20	PASS
		Ant2	5660	5660.017	3.00353	±20	PASS
		Ant1	5700	5700.017	2.98246	±20	PASS
		Ant2	5700	5700.017	2.98246	±20	PASS
		Ant1	5745	5745.017	2.95910	±20	PASS
		Ant2	5745	5745.017	2.95910	±20	PASS
	20M-M(HT) MIMO mode	Ant1	5660	5660.017	3.00353	±20	PASS
		Ant2	5660	5660.017	3.00353	±20	PASS
		Ant1	5700	5700.017	2.98246	±20	PASS
		Ant2	5700	5700.016	2.80702	±20	PASS
		Ant1	5745	5745.017	2.95910	±20	PASS
		Ant2	5745	5745.017	2.95910	±20	PASS
	20M-M(VHT) MIMO mode	Ant1	5660	5660.016	2.82686	±20	PASS
		Ant2	5660	5660.017	3.00353	±20	PASS
		Ant1	5700	5700.017	2.98246	±20	PASS
		Ant2	5700	5700.017	2.98246	±20	PASS
		Ant1	5745	5745.017	2.95910	±20	PASS
		Ant2	5745	5745.017	2.95910	±20	PASS



Test Result HTNV 20MHz

TestCondition	TestMode	Antenna	Freq(MHz)	CenterFreq [MHz]	Result [ppm]	Limit [ppm]	Verdict
HTNV	20M-S mode(SISO)	Ant1	5660	5660.017	3.00353	±20	PASS
		Ant2	5660	5660.017	3.00353	±20	PASS
		Ant1	5700	5700.017	2.98246	±20	PASS
		Ant2	5700	5700.017	2.98246	±20	PASS
		Ant1	5745	5745.017	2.95910	±20	PASS
		Ant2	5745	5745.017	2.95910	±20	PASS
	20M-M(HT) MIMO mode	Ant1	5660	5660.017	3.00353	±20	PASS
		Ant2	5660	5660.016	2.82686	±20	PASS
		Ant1	5700	5700.017	2.98246	±20	PASS
		Ant2	5700	5700.016	2.80702	±20	PASS
		Ant1	5745	5745.017	2.95910	±20	PASS
		Ant2	5745	5745.017	2.95910	±20	PASS
	20M-M(VHT) MIMO mode	Ant1	5660	5660.017	3.00353	±20	PASS
		Ant2	5660	5660.017	3.00353	±20	PASS
		Ant1	5700	5700.017	2.98246	±20	PASS
		Ant2	5700	5700.017	2.98246	±20	PASS
		Ant1	5745	5745.017	2.95910	±20	PASS
		Ant2	5745	5745.017	2.95910	±20	PASS



Test Result Humidity 20MHz

TestCondition	TestMode	Antenna	Freq(MHz)	CenterFreq [MHz]	Result [ppm]	Limit [ppm]	Verdict
Humidity	20M-S mode(SISO)	Ant1	5660	5660.017	3.00353	±20	PASS
		Ant2	5660	5660.017	3.00353	±20	PASS
		Ant1	5700	5700.017	2.98246	±20	PASS
		Ant2	5700	5700.017	2.98246	±20	PASS
		Ant1	5745	5745.017	2.95910	±20	PASS
		Ant2	5745	5745.017	2.95910	±20	PASS
	20M-M(HT) MIMO mode	Ant1	5660	5660.017	3.00353	±20	PASS
		Ant2	5660	5660.017	3.00353	±20	PASS
		Ant1	5700	5700.017	2.98246	±20	PASS
		Ant2	5700	5700.016	2.80702	±20	PASS
		Ant1	5745	5745.017	2.95910	±20	PASS
		Ant2	5745	5745.017	2.95910	±20	PASS
	20M-M(VHT) MIMO mode	Ant1	5660	5660.016	2.82686	±20	PASS
		Ant2	5660	5660.017	3.00353	±20	PASS
		Ant1	5700	5700.017	2.98246	±20	PASS
		Ant2	5700	5700.017	2.98246	±20	PASS
		Ant1	5745	5745.017	2.95910	±20	PASS
		Ant2	5745	5745.017	2.95910	±20	PASS




Test Result Vibration 20MHz

TestCondition	TestMode	Antenna	Freq(MHz)	CenterFreq [MHz]	Result [ppm]	Limit [ppm]	Verdict
Vibration	20M-S mode(SISO)	Ant1	5660	5660.017	3.00353	±20	PASS
		Ant2	5660	5660.016	2.82686	±20	PASS
		Ant1	5700	5700.017	2.98246	±20	PASS
		Ant2	5700	5700.017	2.98246	±20	PASS
		Ant1	5745	5745.017	2.95910	±20	PASS
		Ant2	5745	5745.017	2.95910	±20	PASS
	20M-M(HT) MIMO mode	Ant1	5660	5660.017	3.00353	±20	PASS
		Ant2	5660	5660.017	3.00353	±20	PASS
		Ant1	5700	5700.017	2.98246	±20	PASS
		Ant2	5700	5700.016	2.80702	±20	PASS
		Ant1	5745	5745.017	2.95910	±20	PASS
		Ant2	5745	5745.017	2.95910	±20	PASS
	20M-M(VHT) MIMO mode	Ant1	5660	5660.017	3.00353	±20	PASS
		Ant2	5660	5660.017	3.00353	±20	PASS
		Ant1	5700	5700.017	2.98246	±20	PASS
		Ant2	5700	5700.017	2.98246	±20	PASS
		Ant1	5745	5745.017	2.95910	±20	PASS
		Ant2	5745	5745.017	2.95910	±20	PASS



Test Graphs NTVN 20MHz

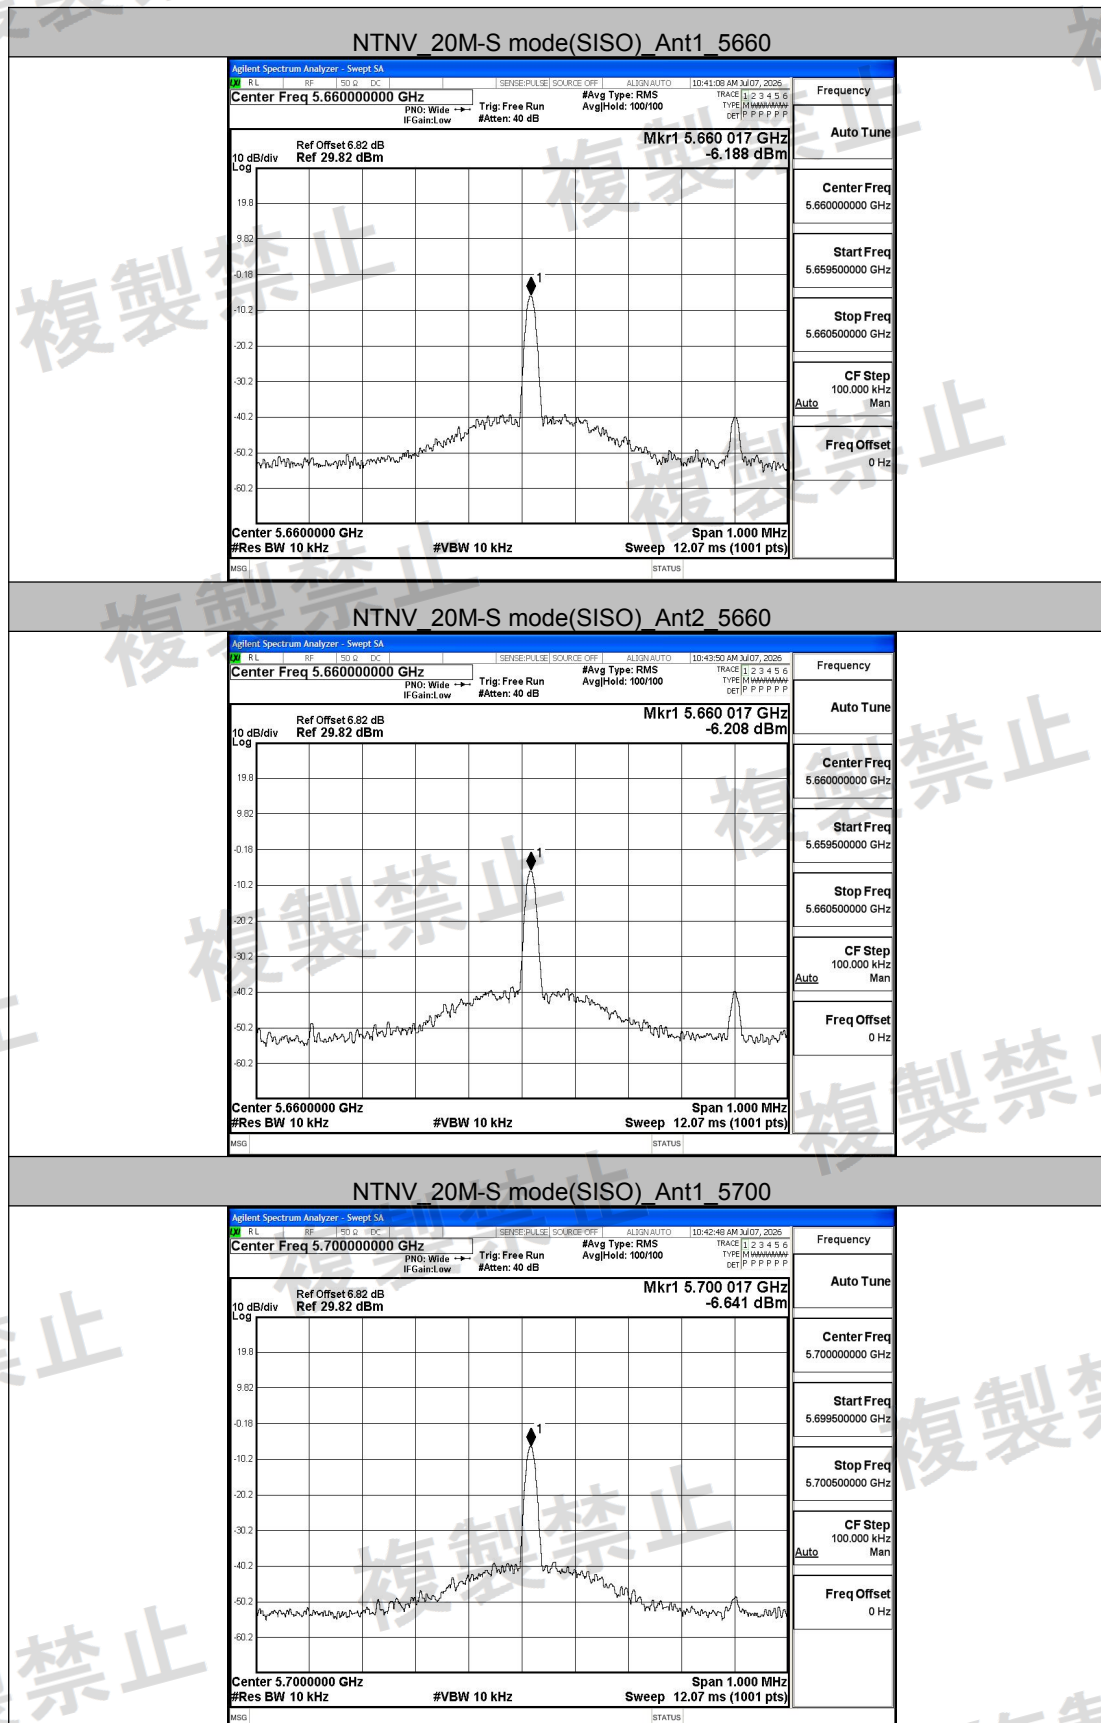

Guangdong DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang 'an Town, Dongguan City, Guangdong P.R.China


Web: www.dn-testing.com

Tel: +86-769-88087383


E-mail: service@dn-testing.com




NTNV_20M-S mode(SISO)_Ant2_5700

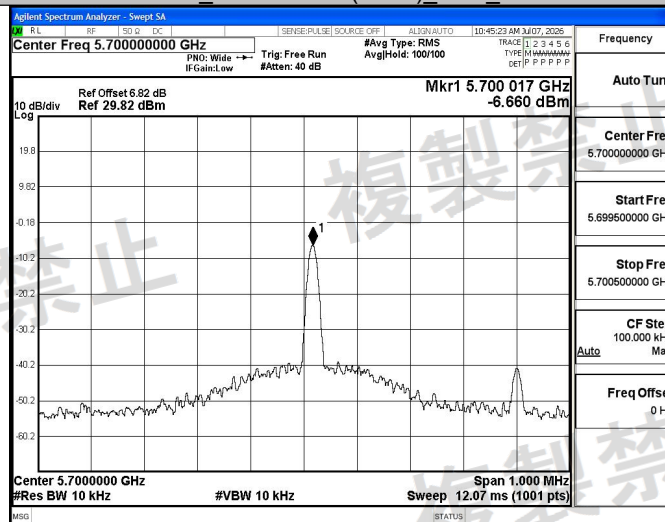

NTNV_20M-S mode(SISO)_Ant1_5745

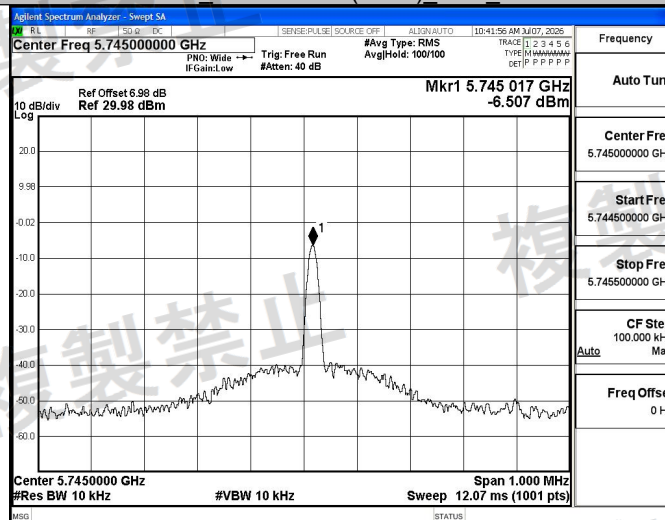

NTNV_20M-S mode(SISO)_Ant2_5745

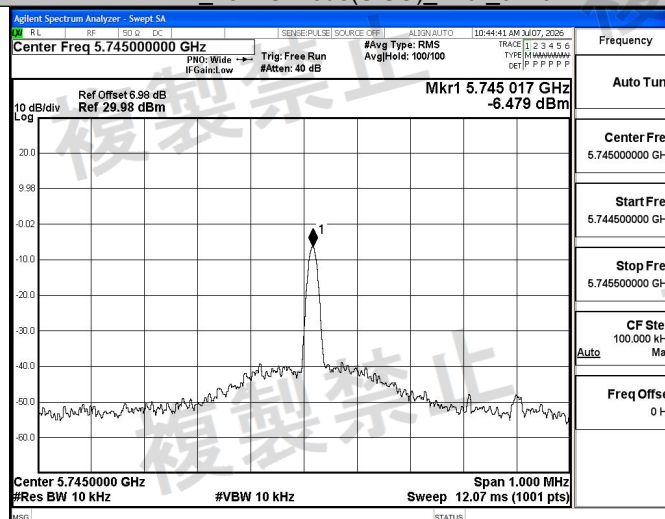

NTNV_20M-M(HT) MIMO mode_Ant1_5660


Guangdong DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang 'an Town, Dongguan City, Guangdong P.R.China


Web: www.dn-testing.com

Tel: +86-769-88087383


E-mail: service@dn-testing.com

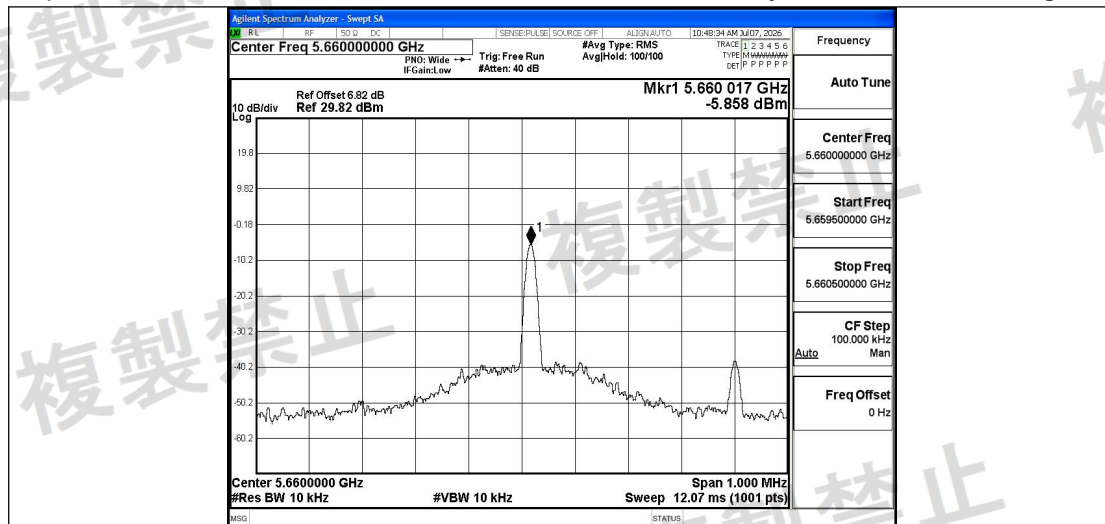


NTNV 20M-M(HT) MIMO mode_Ant2_5660

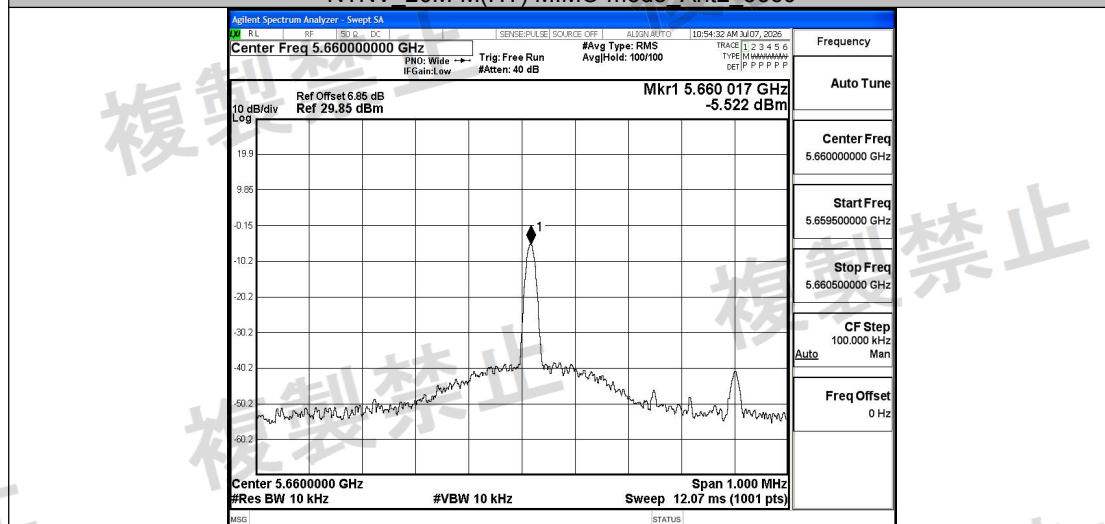


NTNV 20M-M(HT) MIMO mode_Ant1_5700

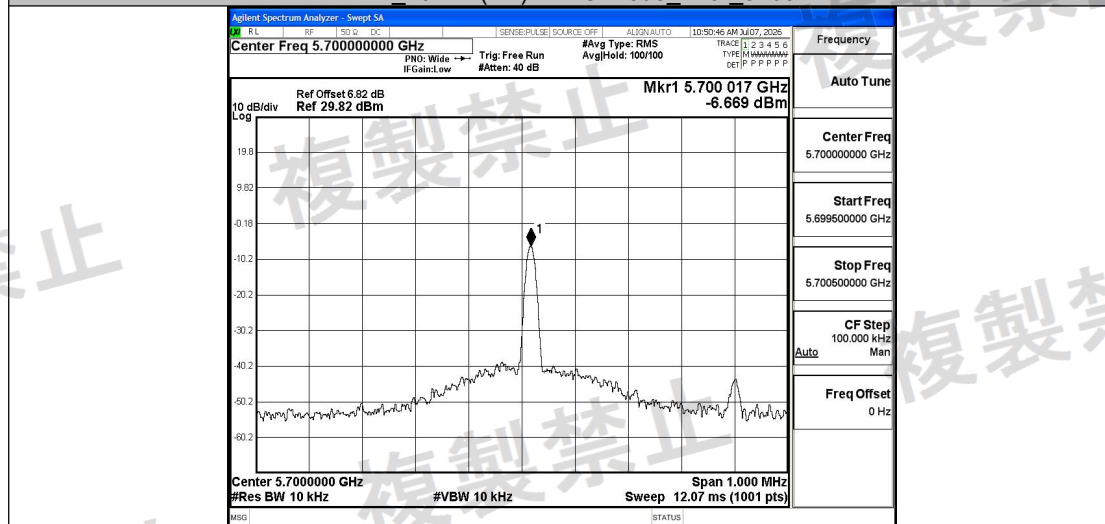


NTNV 20M-M(HT) MIMO mode_Ant2_5700

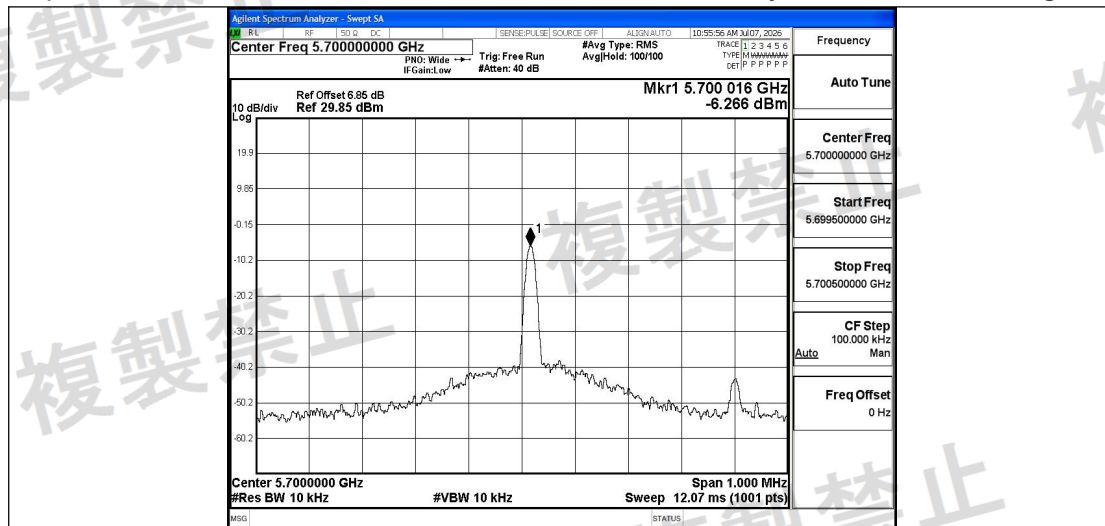


NTNV_20M-M(HT) MIMO mode_Ant1_5745

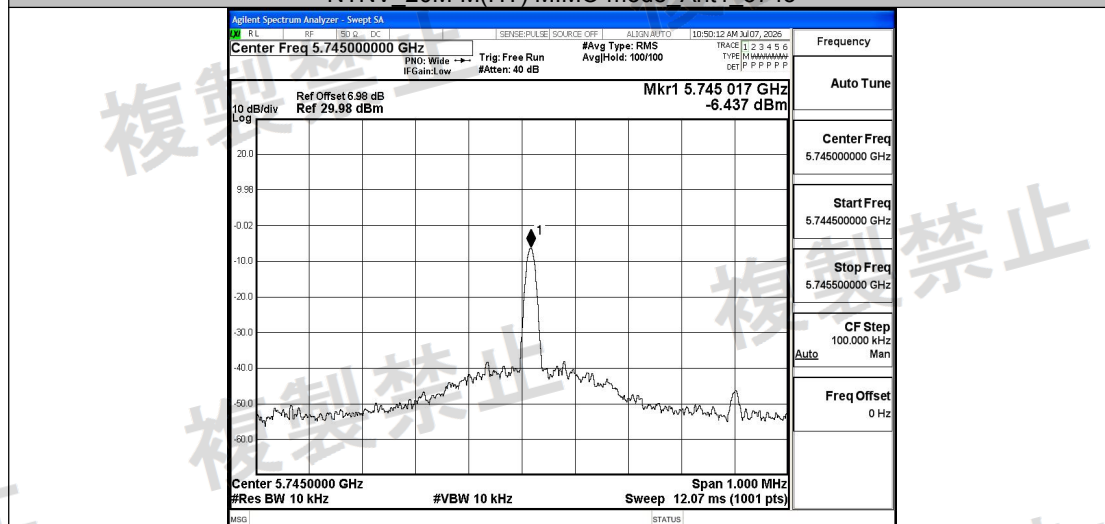


NTNV_20M-M(HT) MIMO mode_Ant2_5745

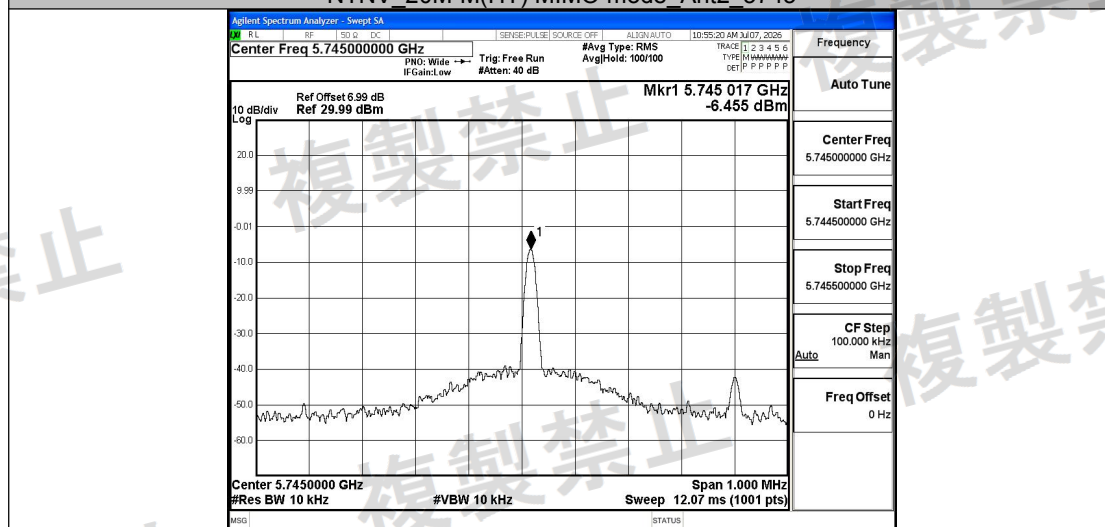


NTNV_20M-M(VHT) MIMO mode_Ant1_5660

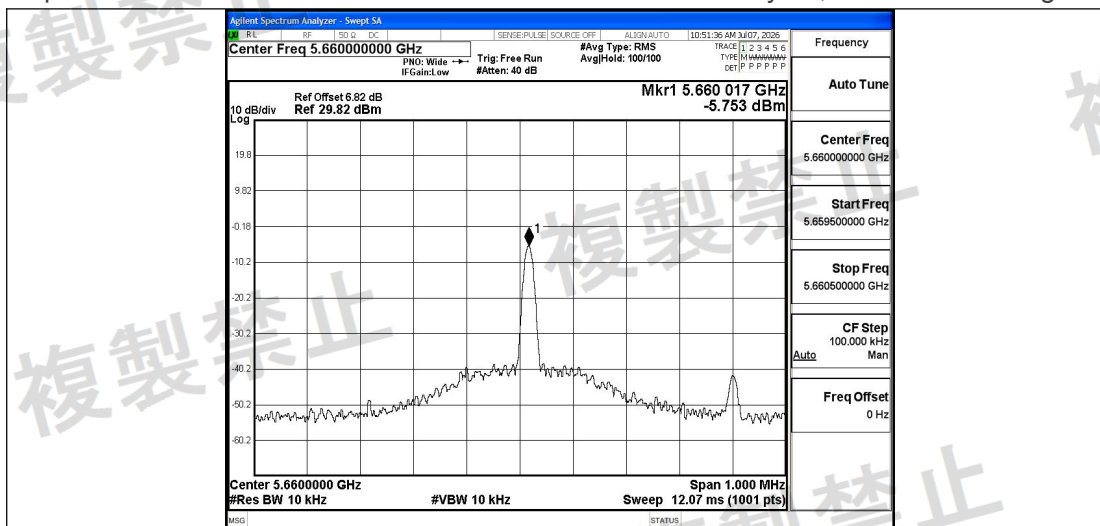


NTNV_20M-M(VHT) MIMO mode Ant2 5660

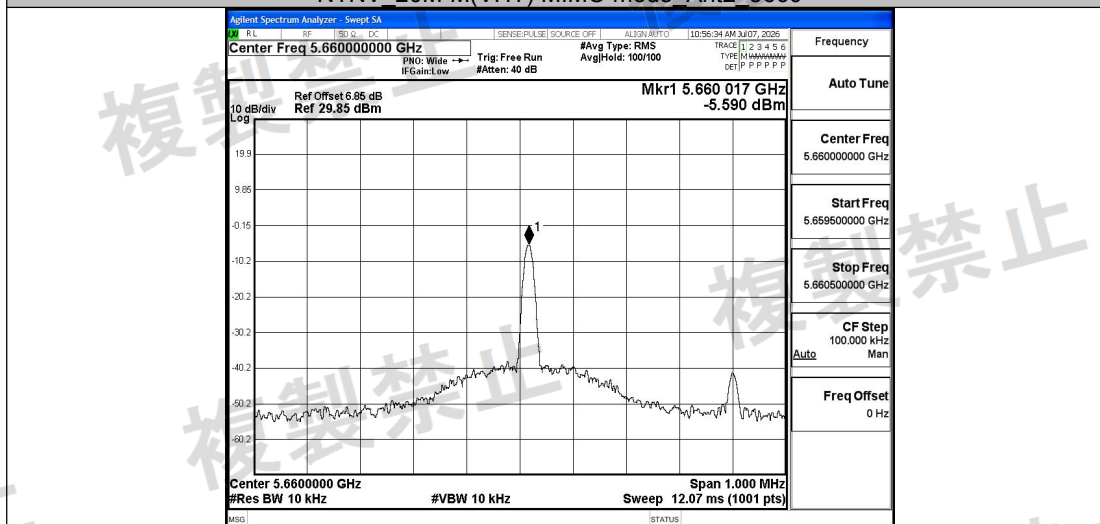


NTNV_20M-M(VHT) MIMO mode Ant1 5700

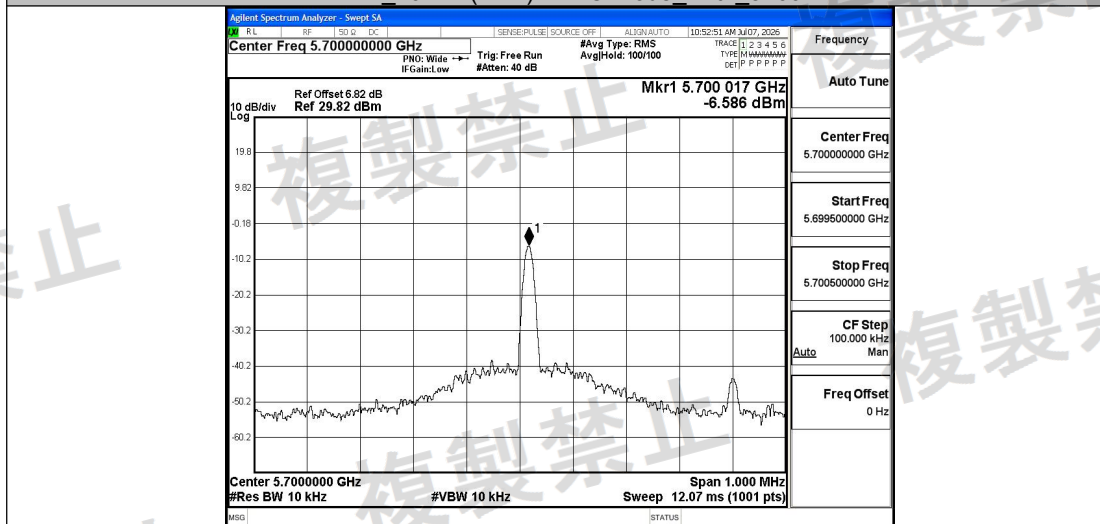


NTNV_20M-M(VHT) MIMO mode Ant2 5700

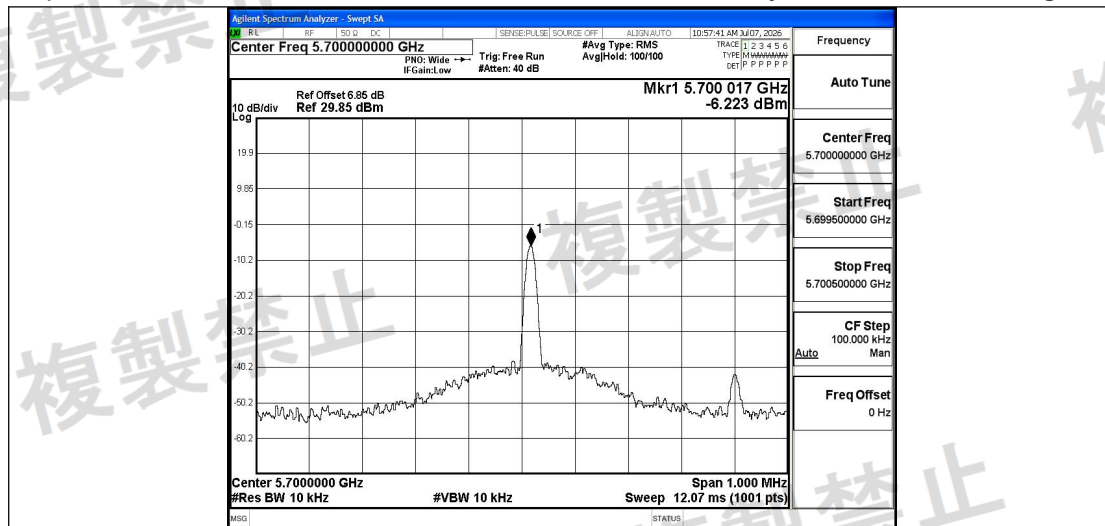

NTNV_20M-M(VHT) MIMO mode Ant1 5745

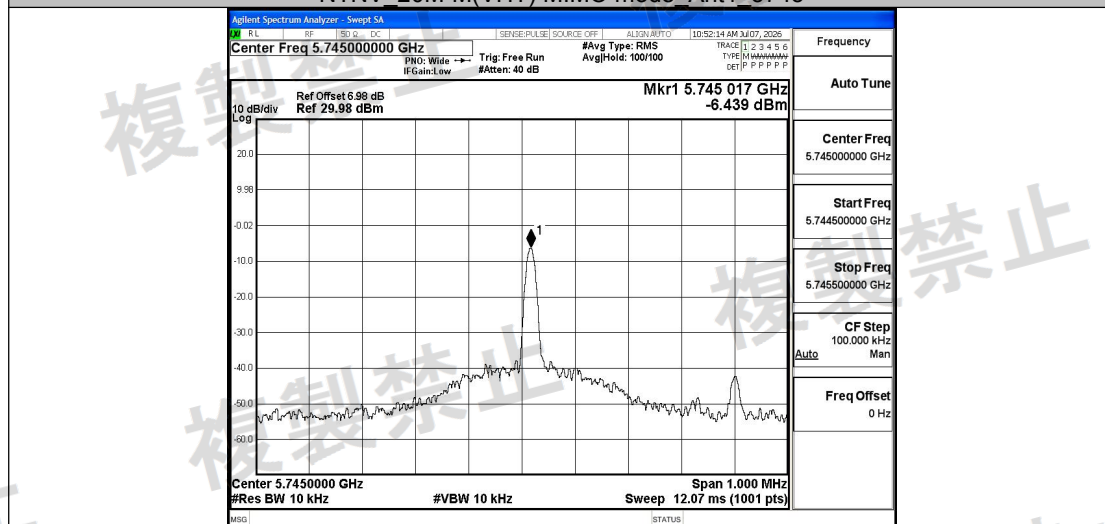


NTNV_20M-M(VHT) MIMO mode Ant2 5745

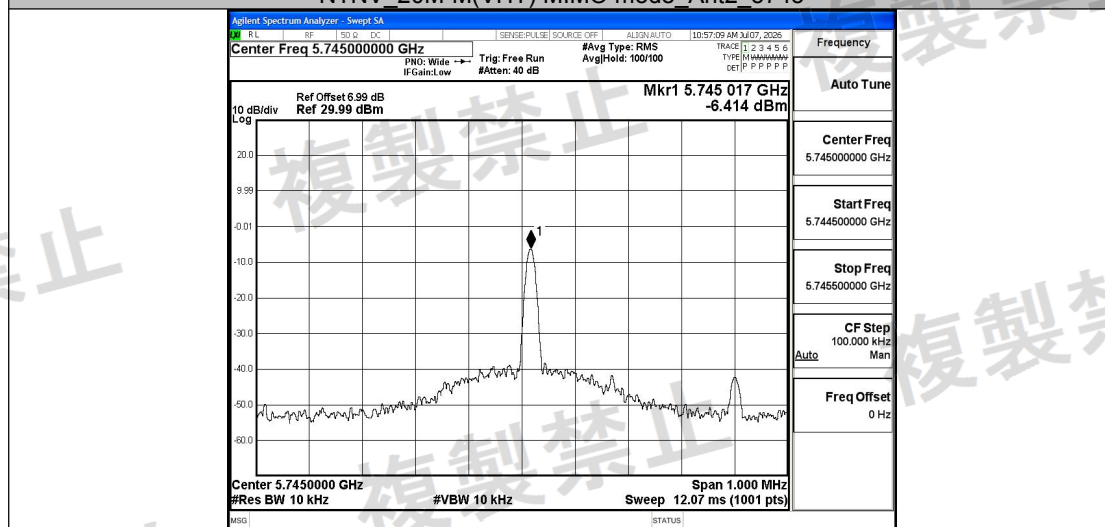



Test Graphs LTVN 20MHz

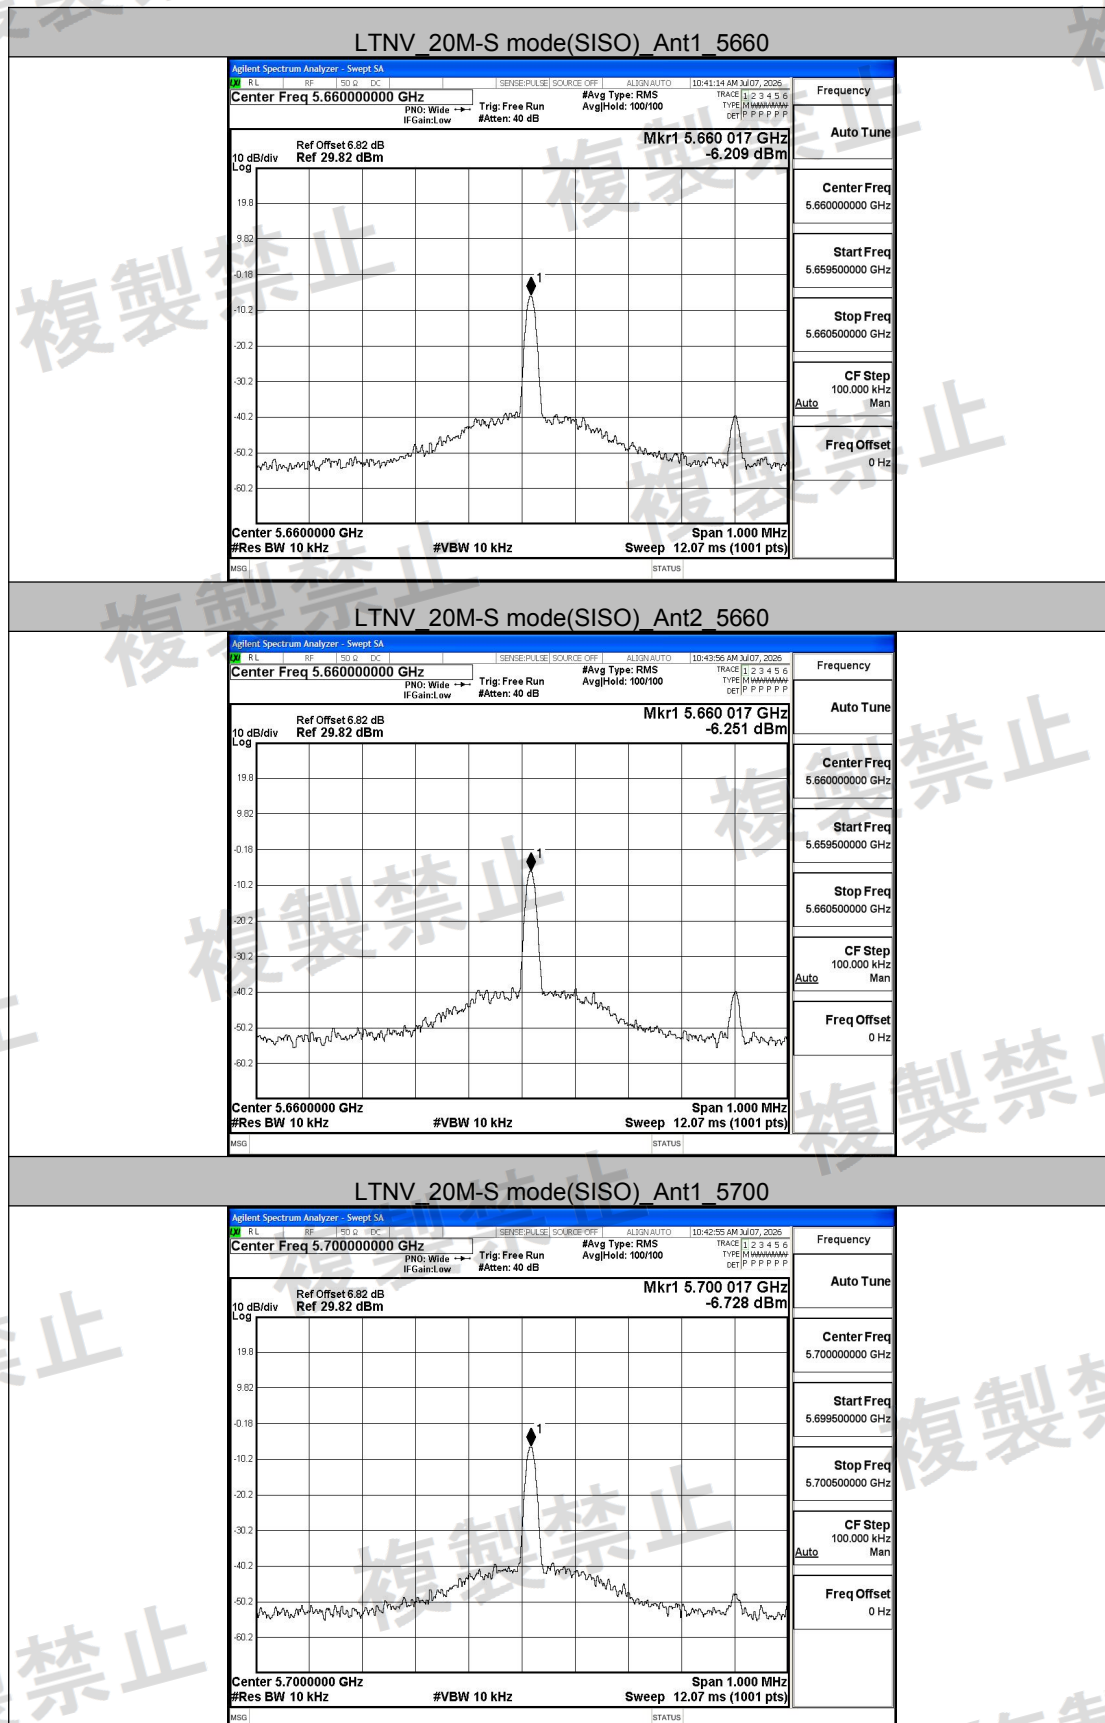

Guangdong DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang 'an Town, Dongguan City, Guangdong P.R.China


Web: www.dn-testing.com

Tel: +86-769-88087383


E-mail: service@dn-testing.com




LTNV_20M-S mode(SISO)_Ant2_5700

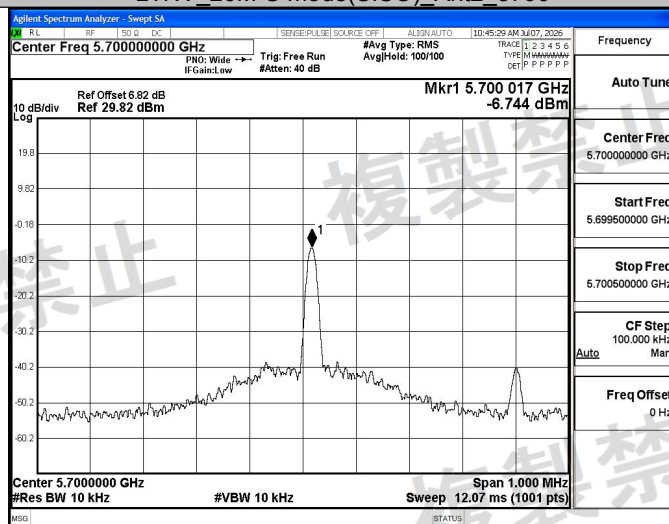

LTNV_20M-S mode(SISO)_Ant1_5745

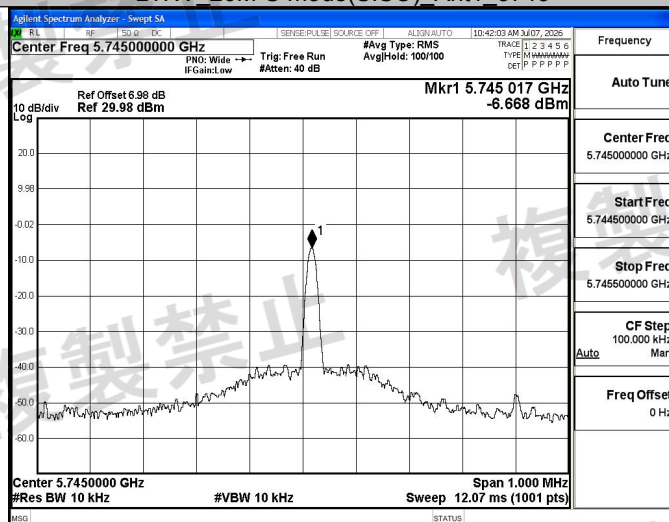

LTNV_20M-S mode(SISO)_Ant2_5745

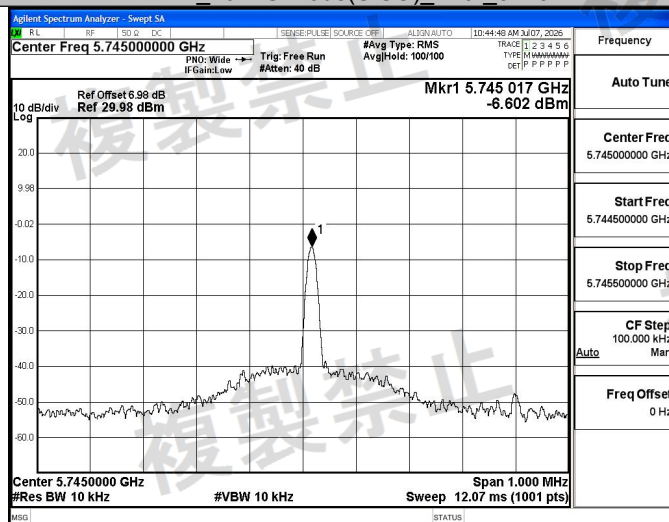

LTNV_20M-M(HT) MIMO mode_Ant1_5660


Guangdong DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang 'an Town, Dongguan City, Guangdong P.R.China


Web: www.dn-testing.com

Tel: +86-769-88087383


E-mail: service@dn-testing.com

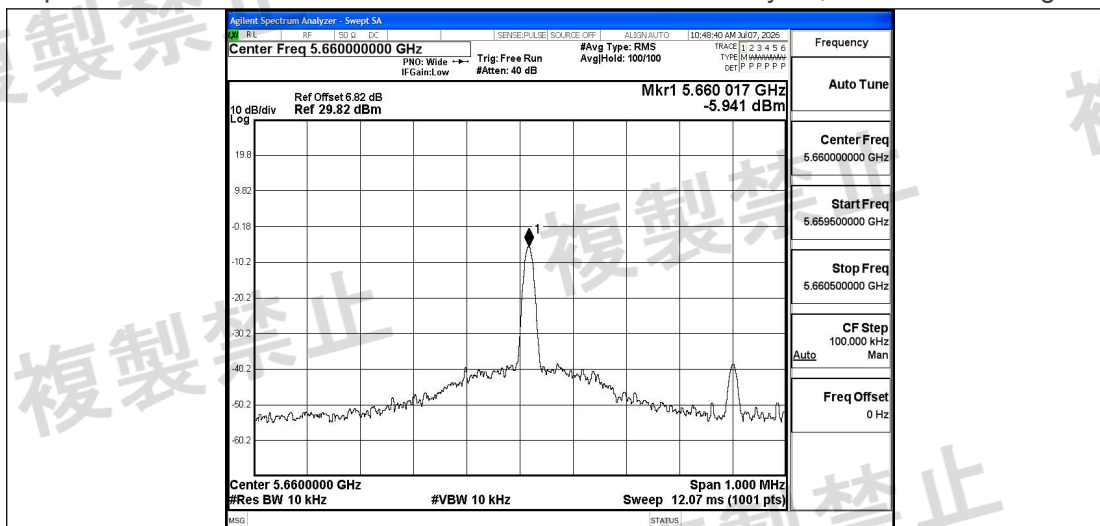


LTNV 20M-M(HT) MIMO mode_Ant2_5660

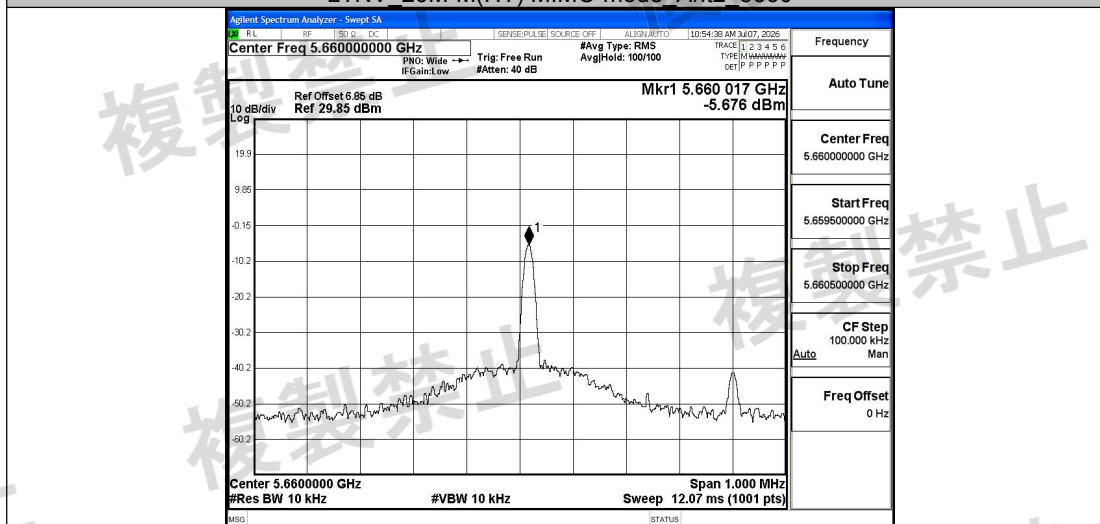


LTNV 20M-M(HT) MIMO mode_Ant1_5700

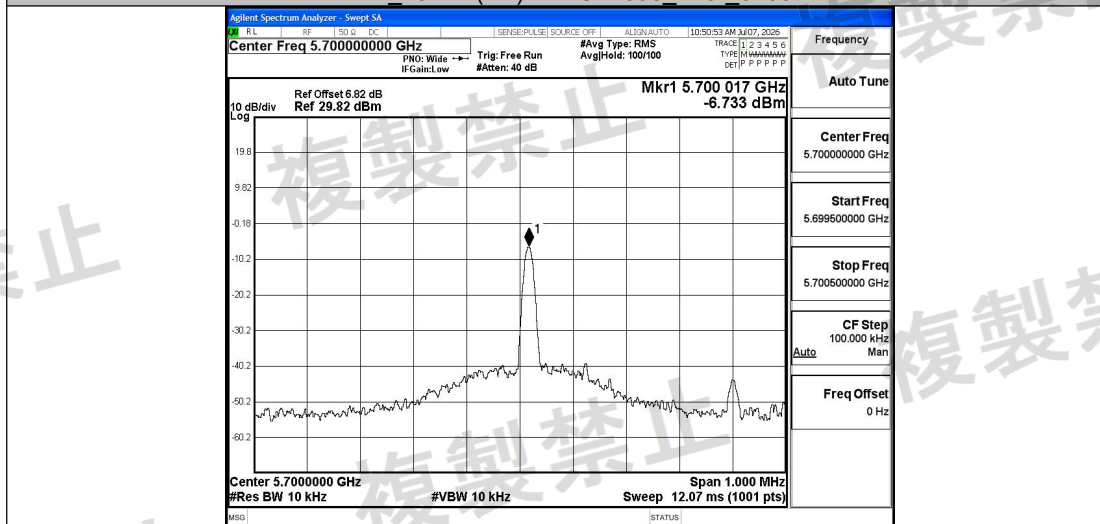


LTNV 20M-M(HT) MIMO mode_Ant2_5700

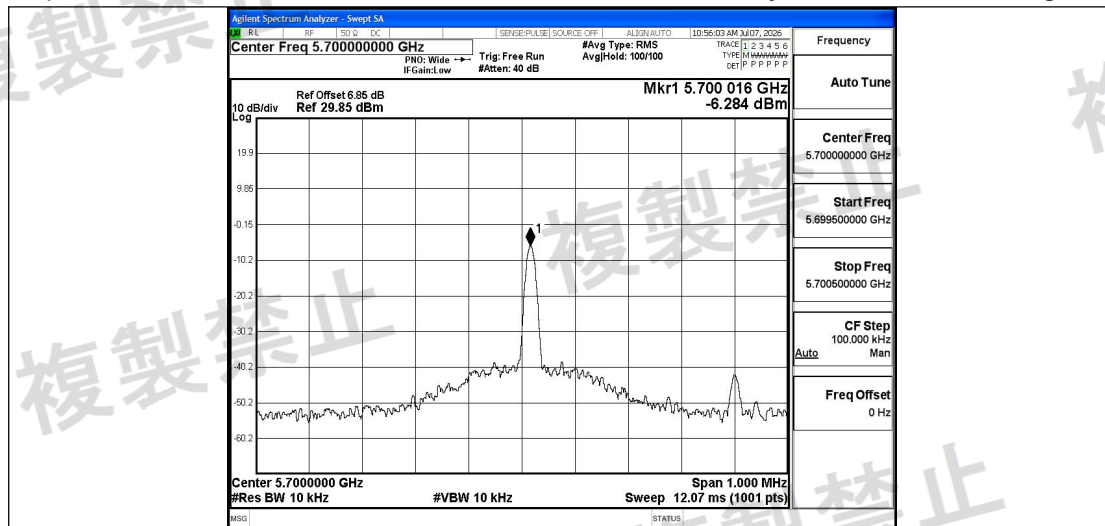


LTNV_20M-M(HT) MIMO mode_Ant1_5745

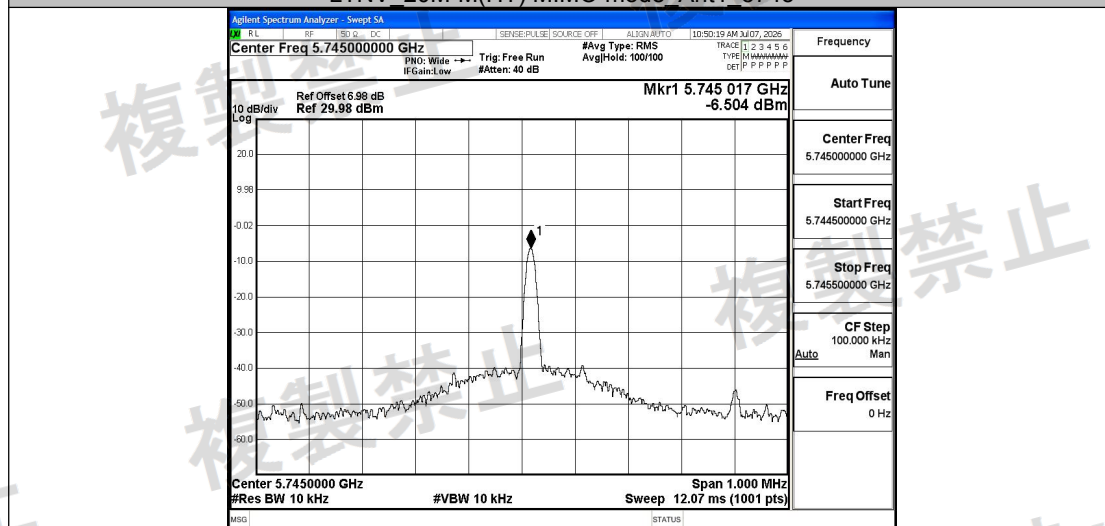


LTNV_20M-M(HT) MIMO mode_Ant2_5745

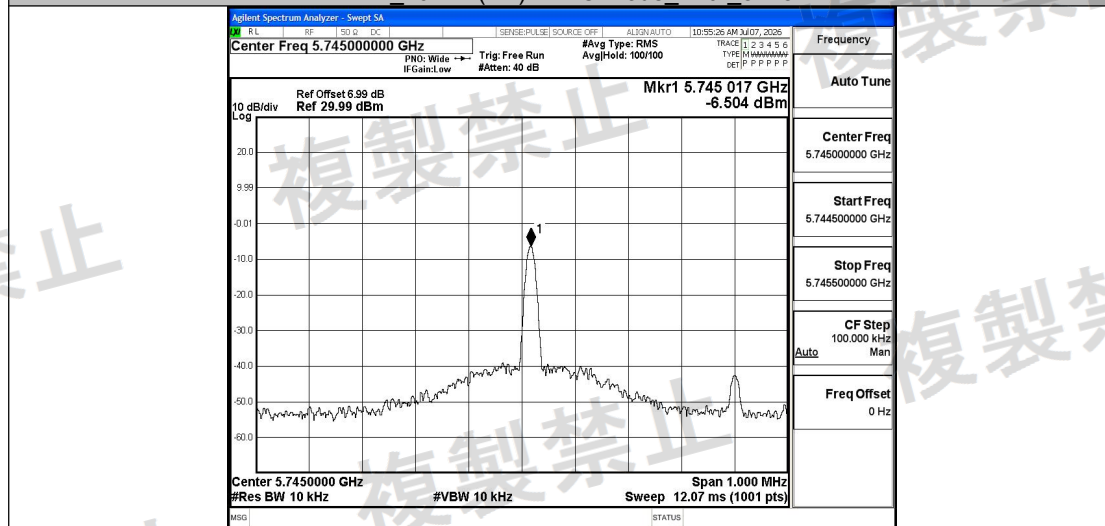


LTNV_20M-M(VHT) MIMO mode_Ant1_5660

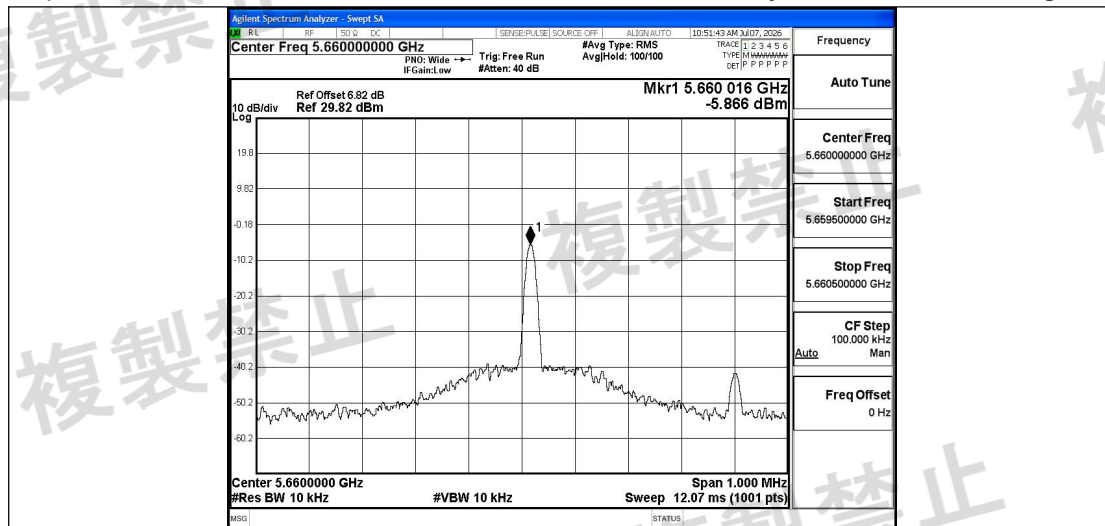


LTNV_20M-M(VHT) MIMO mode Ant2_5660

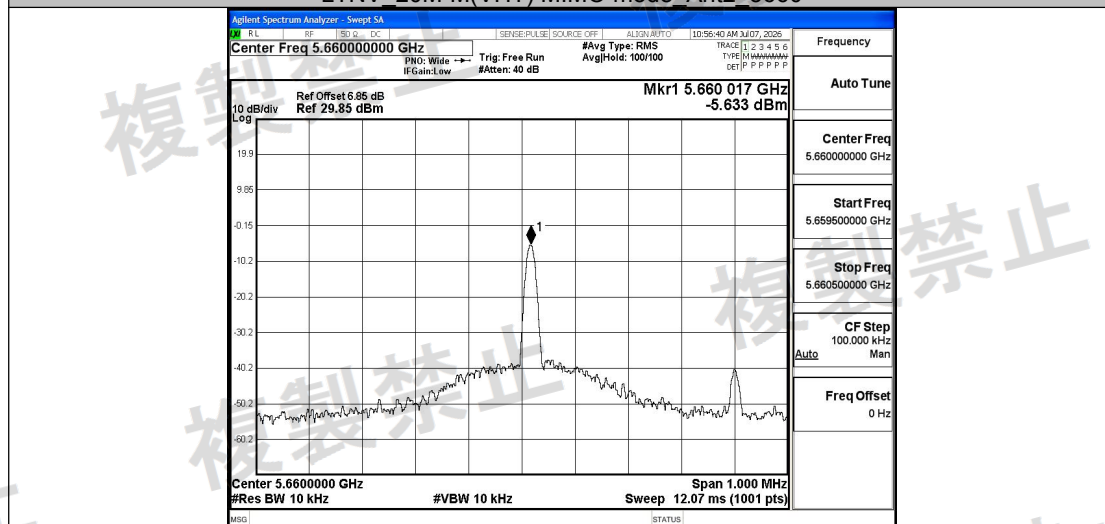


LTNV_20M-M(VHT) MIMO mode Ant1_5700

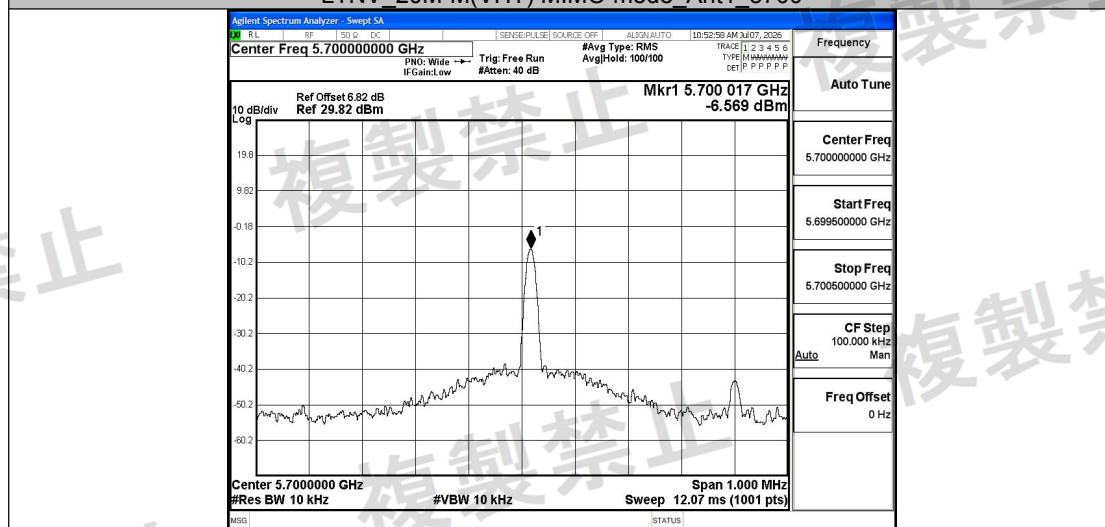


LTNV_20M-M(VHT) MIMO mode Ant2_5700

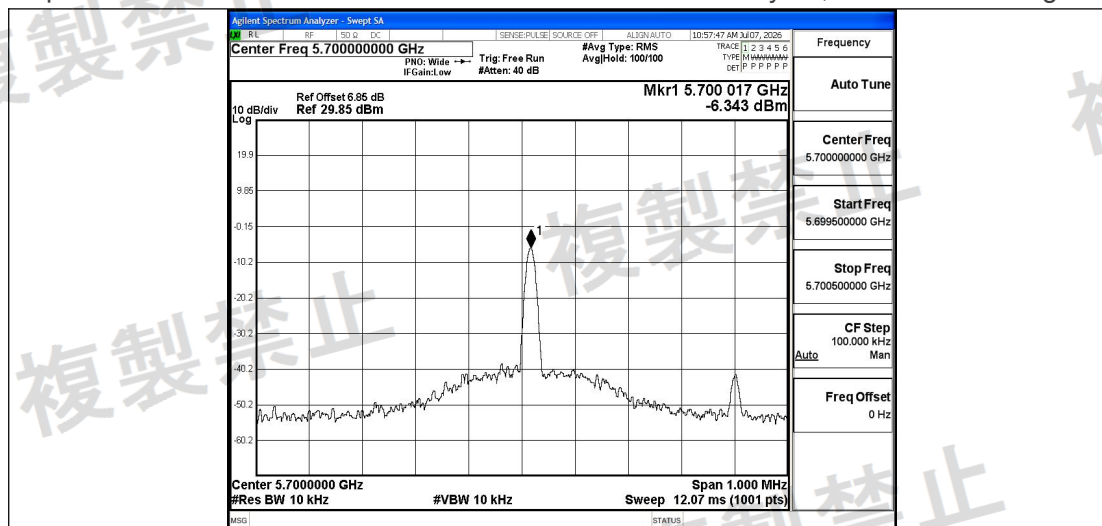

LTNV_20M-M(VHT) MIMO mode Ant1_5745

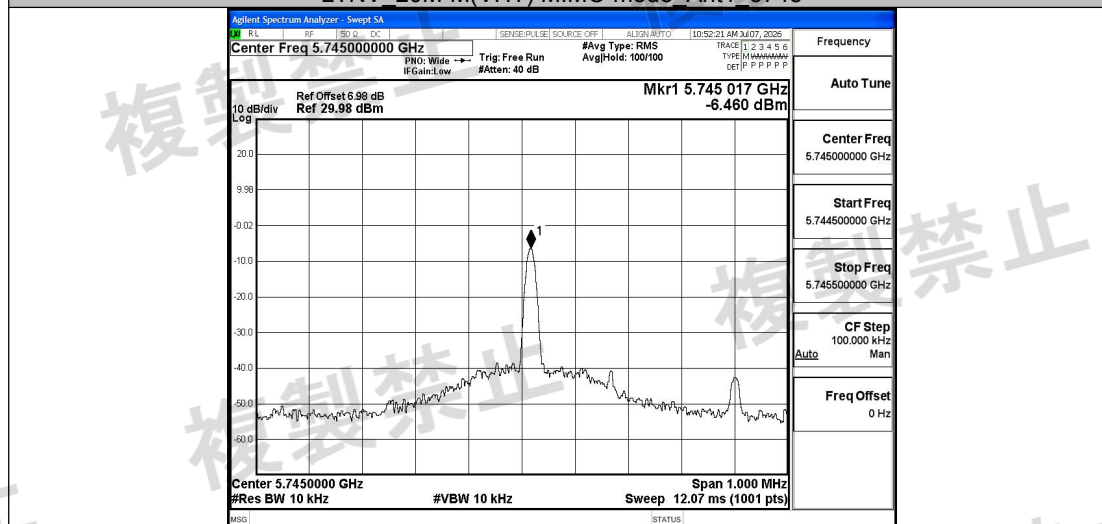


LTNV_20M-M(VHT) MIMO mode Ant2_5745

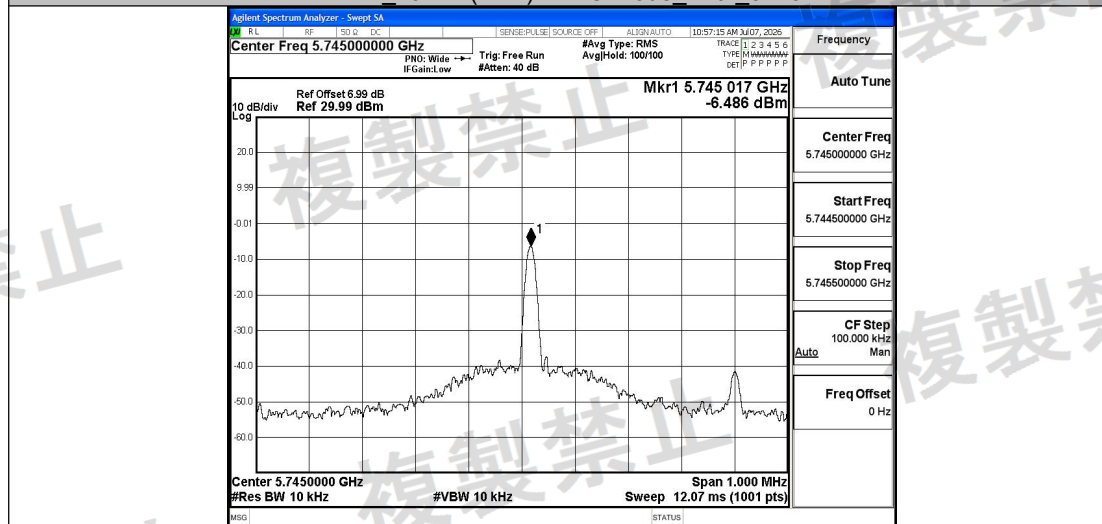



Test Graphs HTNV 20MHz

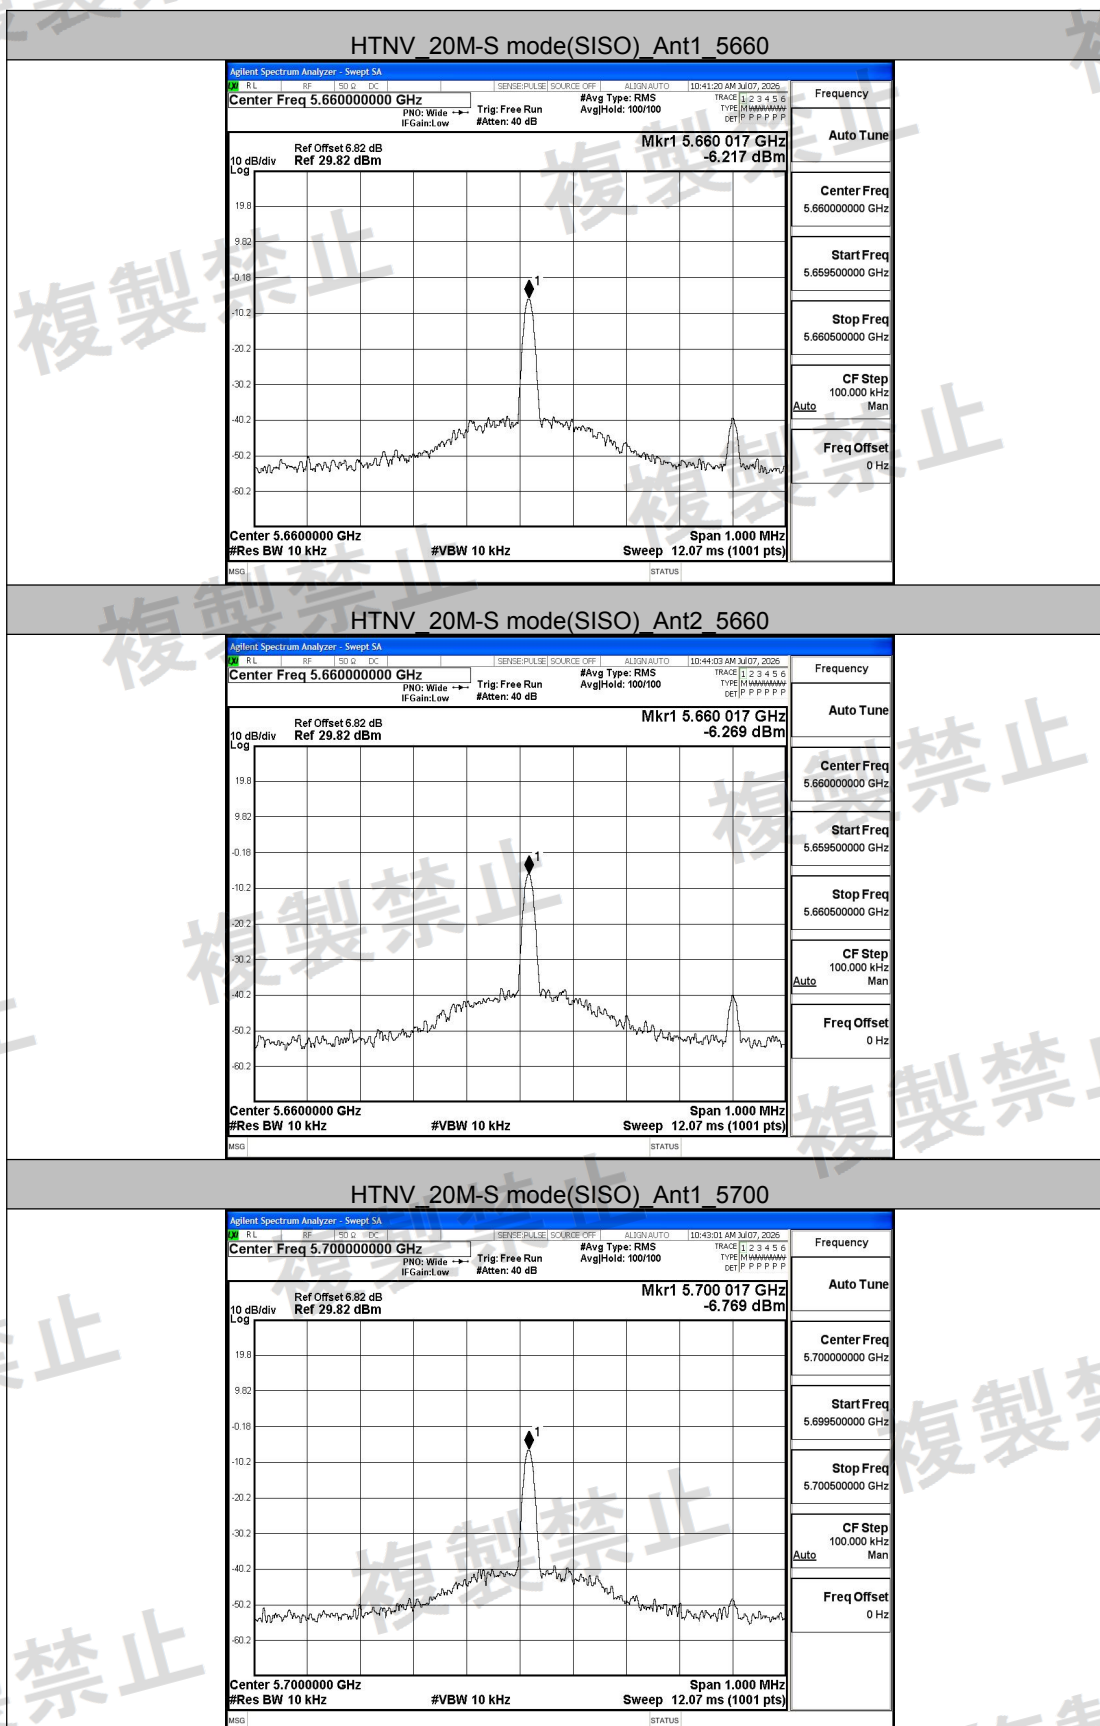

Guangdong DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang 'an Town, Dongguan City, Guangdong P.R.China


Web: www.dn-testing.com

Tel: +86-769-88087383


E-mail: service@dn-testing.com




HTNV_20M-S mode(SISO)_Ant2_5700

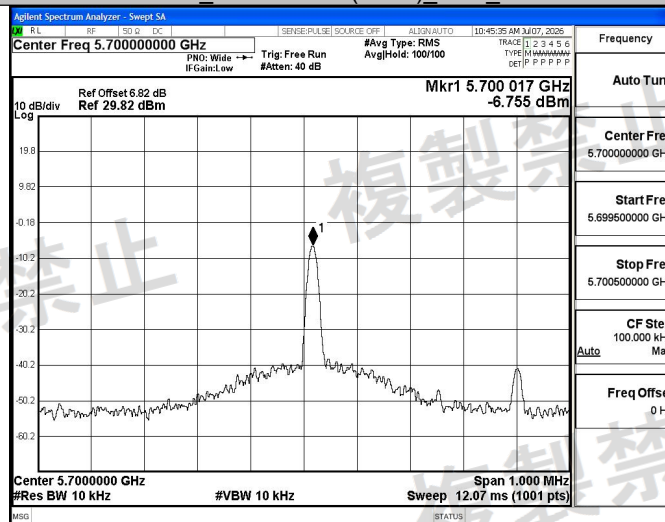

HTNV_20M-S mode(SISO)_Ant1_5745

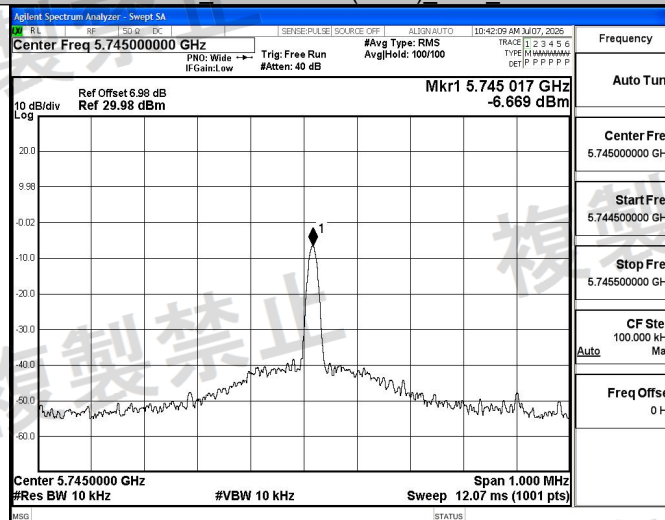

HTNV_20M-S mode(SISO)_Ant2_5745

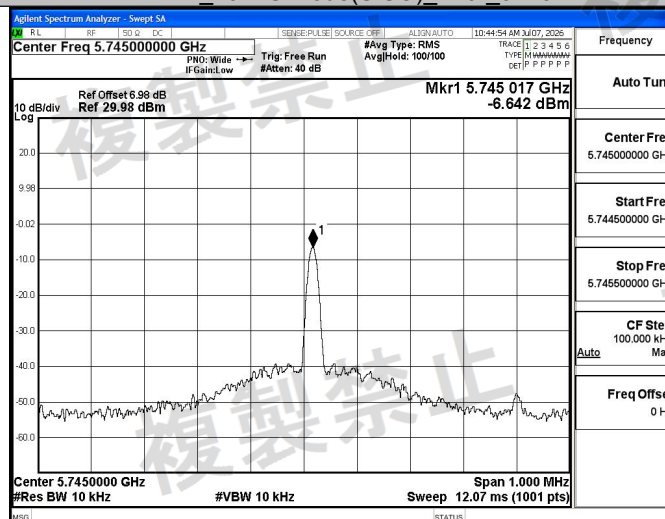

HTNV_20M-M(HT) MIMO mode_Ant1_5660


Guangdong DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang 'an Town, Dongguan City, Guangdong P.R.China


Web: www.dn-testing.com

Tel: +86-769-88087383


E-mail: service@dn-testing.com

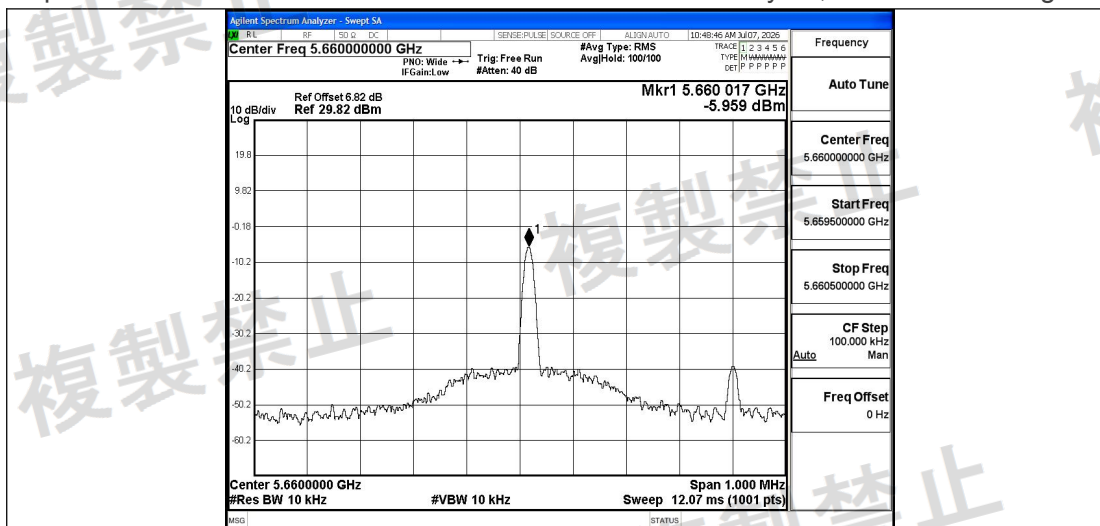


HTNV_20M-M(HT) MIMO mode_Ant2_5660

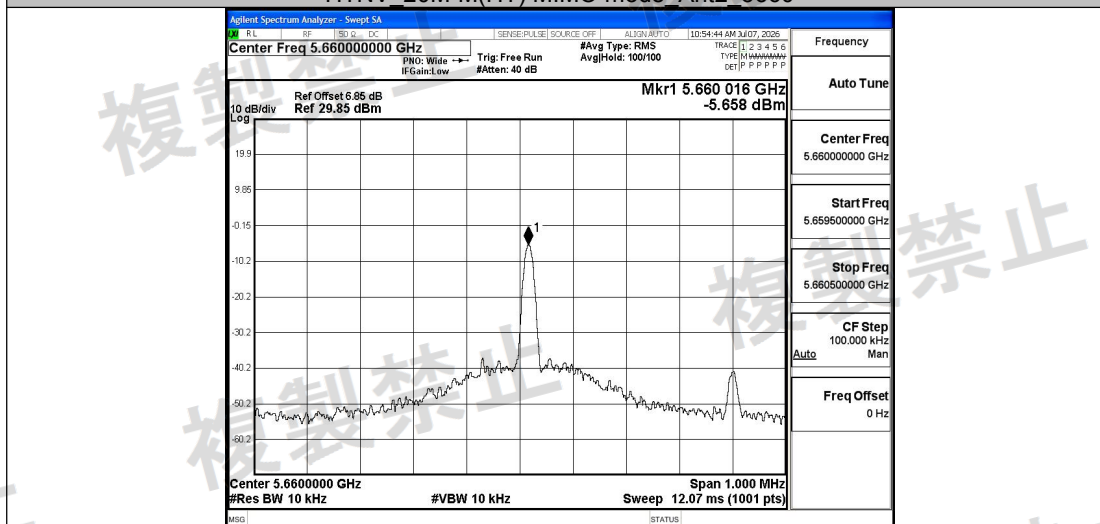


HTNV_20M-M(HT) MIMO mode_Ant1_5700

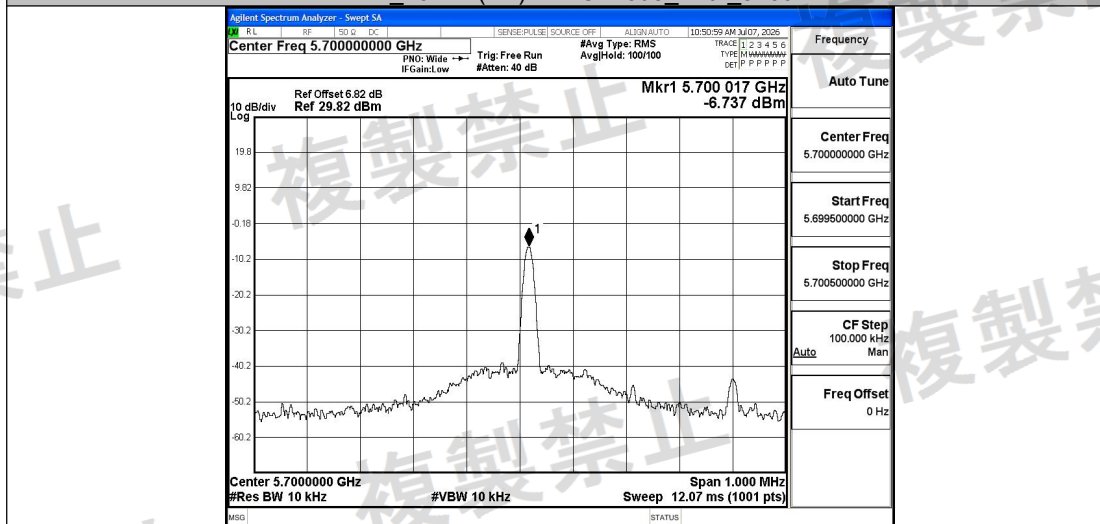


HTNV_20M-M(HT) MIMO mode_Ant2_5700

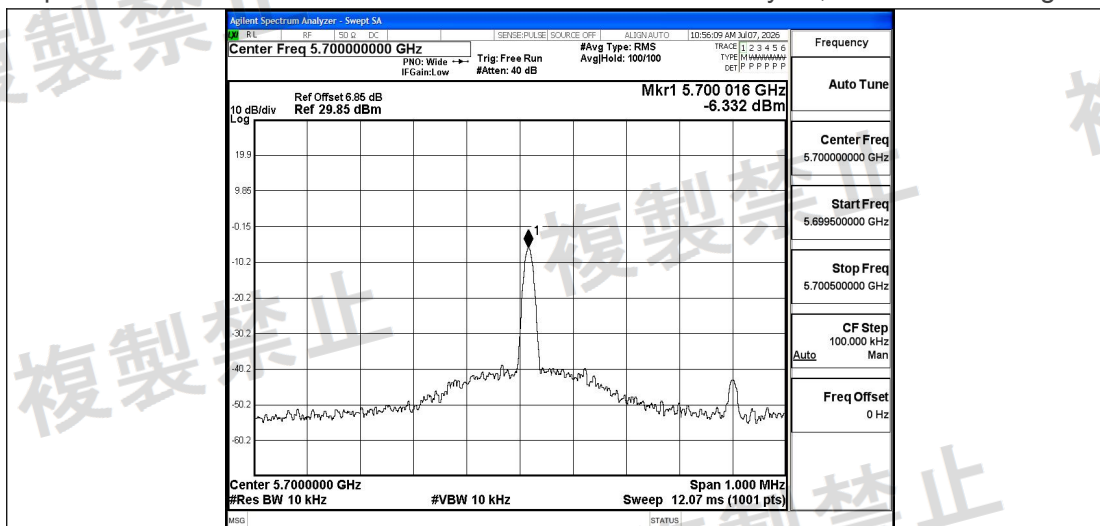


HTNV_20M-M(HT) MIMO mode_Ant1_5745

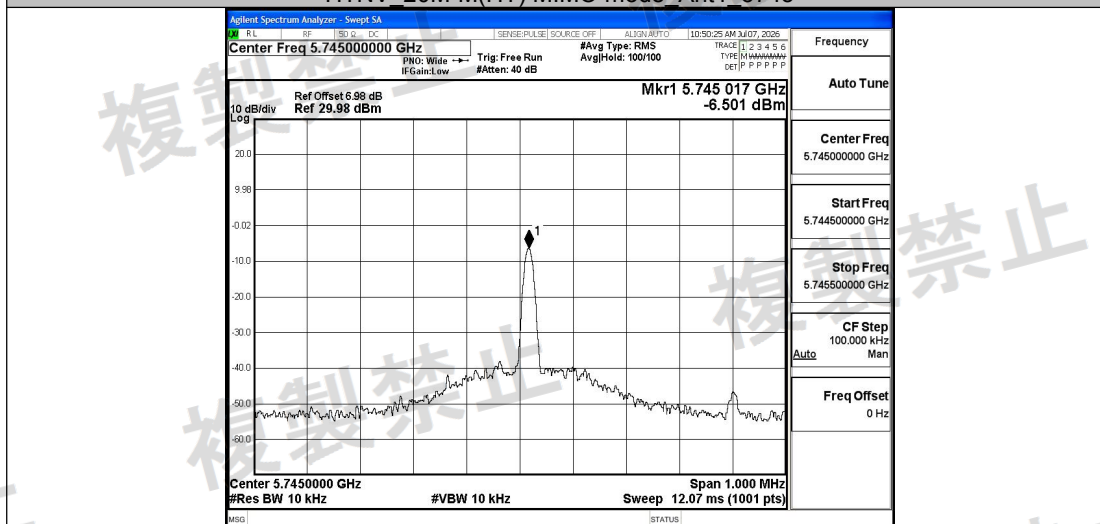


HTNV_20M-M(HT) MIMO mode_Ant2_5745

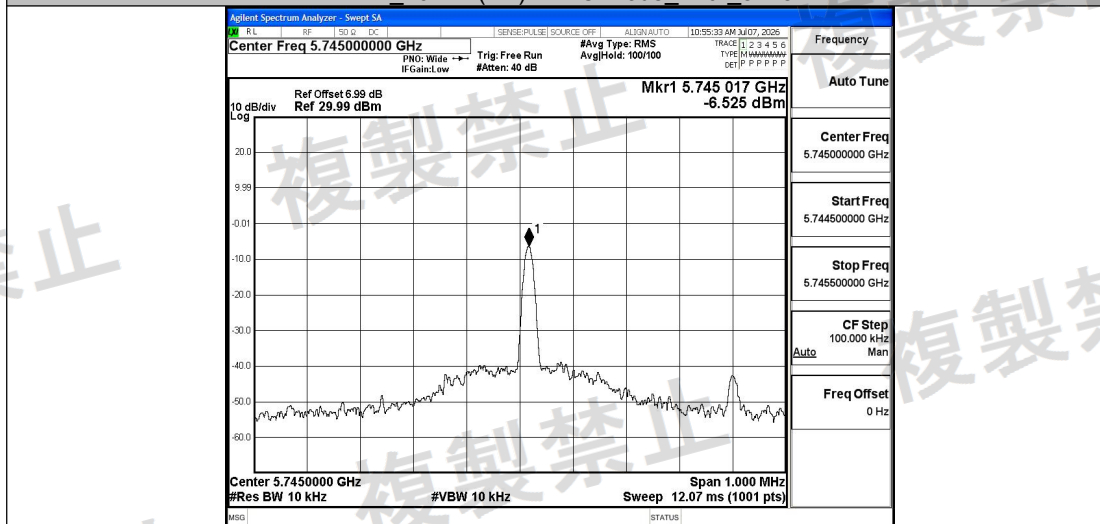


HTNV_20M-M(VHT) MIMO mode_Ant1_5660

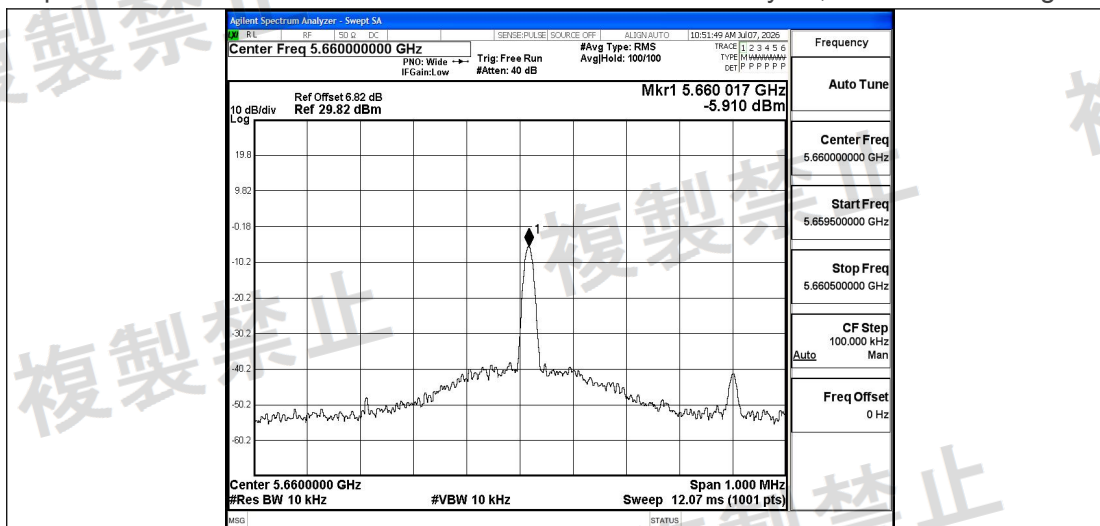


HTNV_20M-M(VHT) MIMO mode Ant2 5660

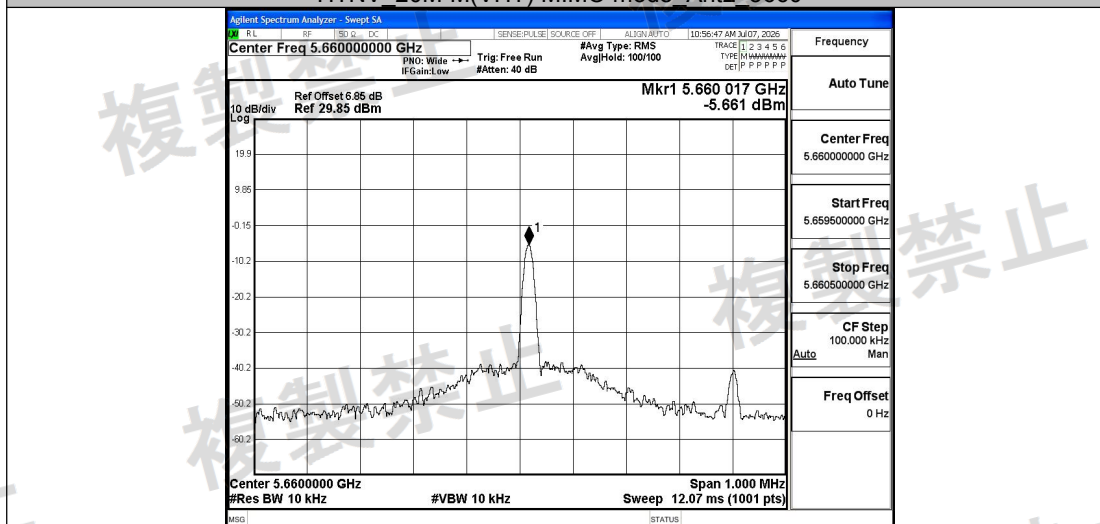


HTNV_20M-M(VHT) MIMO mode Ant1 5700

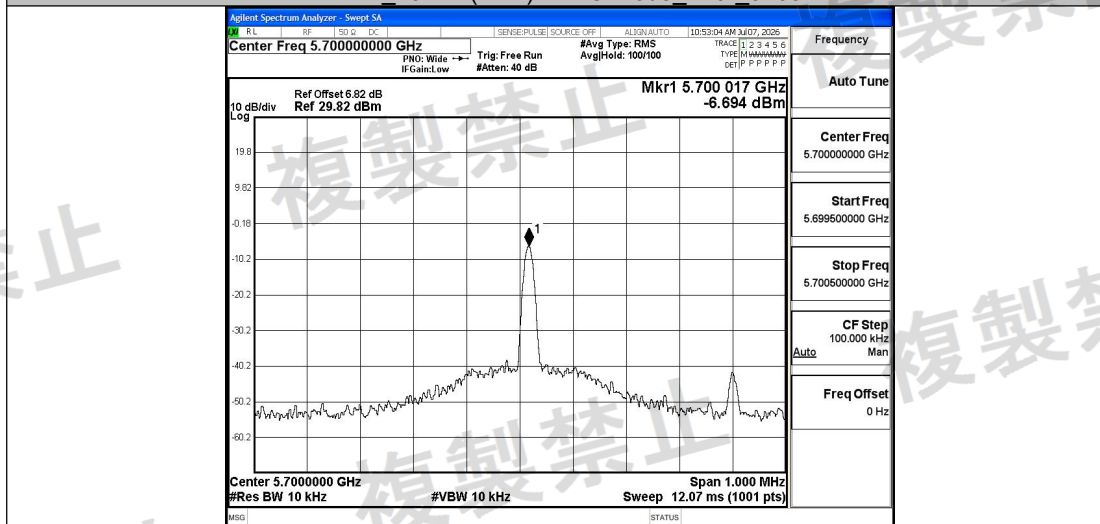


HTNV_20M-M(VHT) MIMO mode Ant2 5700

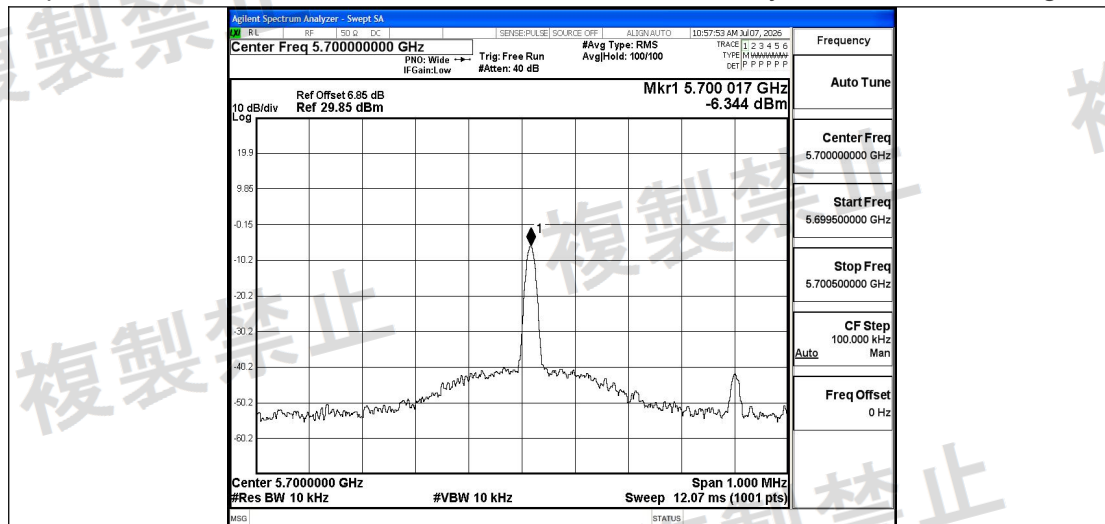

HTNV 20M-M(VHT) MIMO mode Ant1 5745

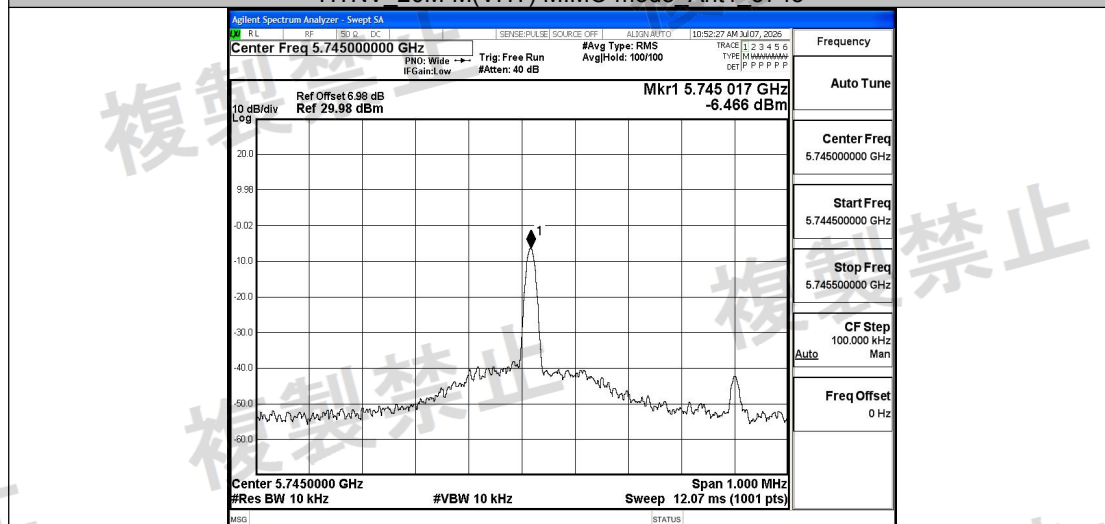


HTNV 20M-M(VHT) MIMO mode Ant2 5745

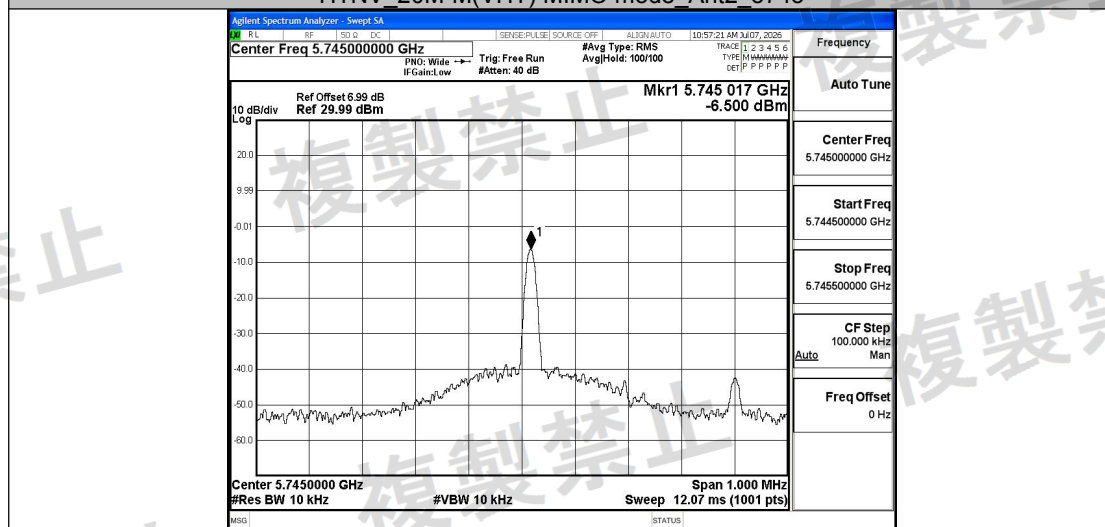



Test Graphs Humidity 20MHz

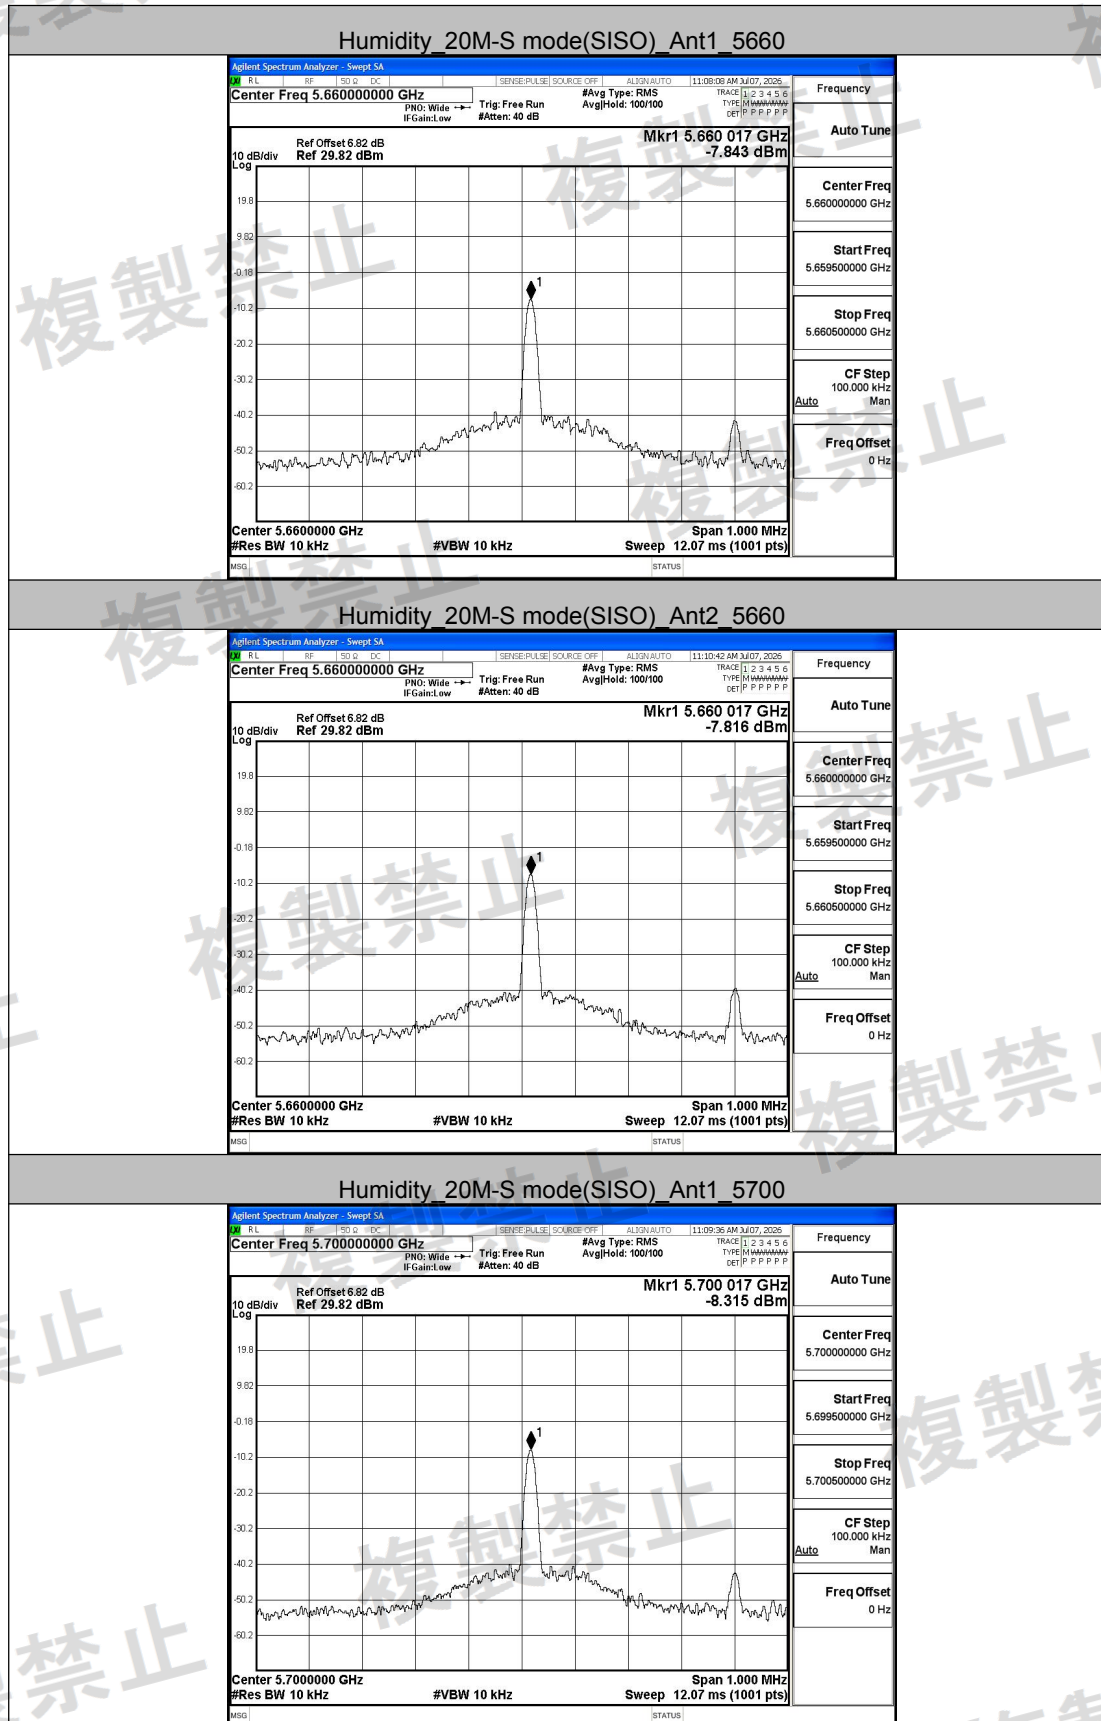

Guangdong DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang 'an Town, Dongguan City, Guangdong P.R.China


Web: www.dn-testing.com

Tel: +86-769-88087383


E-mail: service@dn-testing.com




Humidity_20M-S mode(SISO)_Ant2_5700

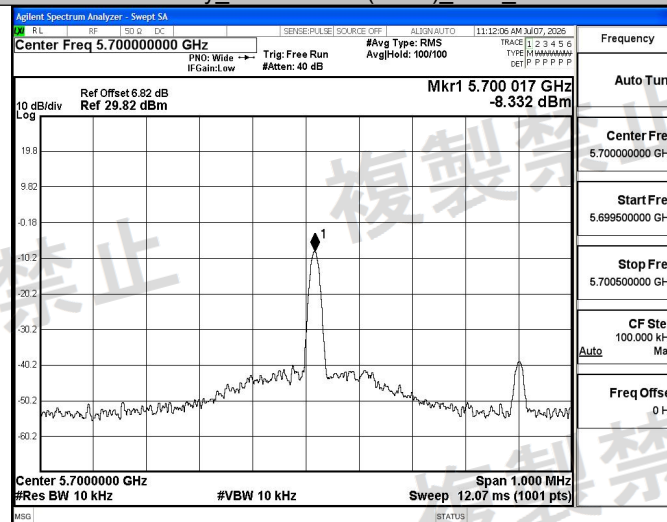

Humidity_20M-S mode(SISO)_Ant1_5745

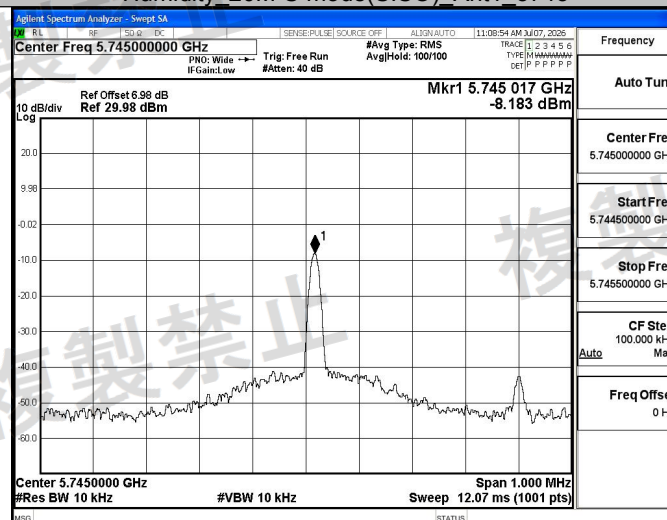

Humidity_20M-S mode(SISO)_Ant2_5745

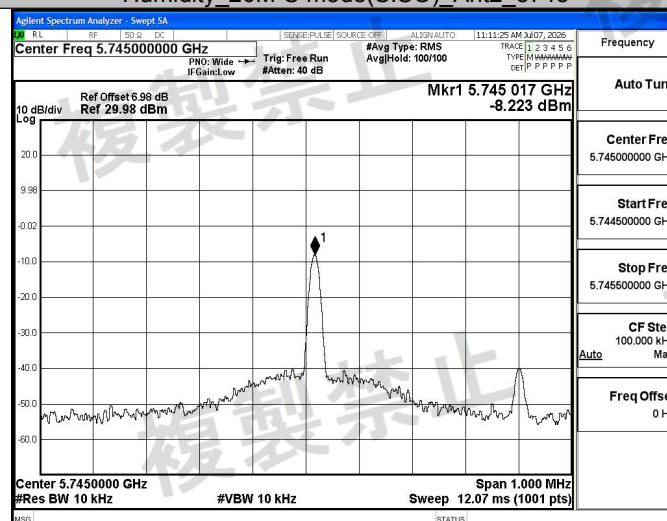

Humidity_20M-M(HT) MIMO mode_Ant1_5660


Guangdong DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang 'an Town, Dongguan City, Guangdong P.R.China


Web: www.dn-testing.com

Tel: +86-769-88087383


E-mail: service@dn-testing.com

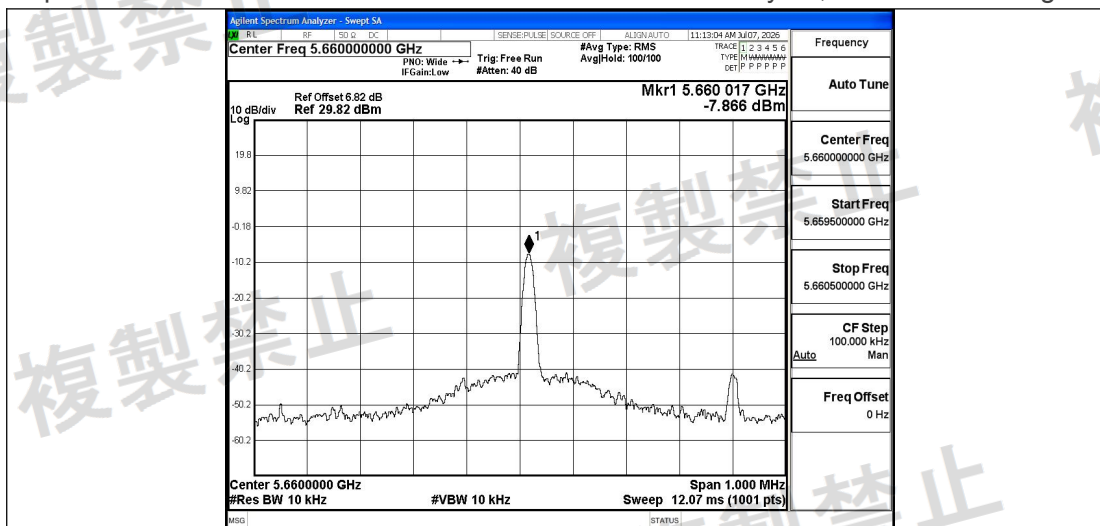


Humidity 20M-M(HT) MIMO mode_Ant2_5660

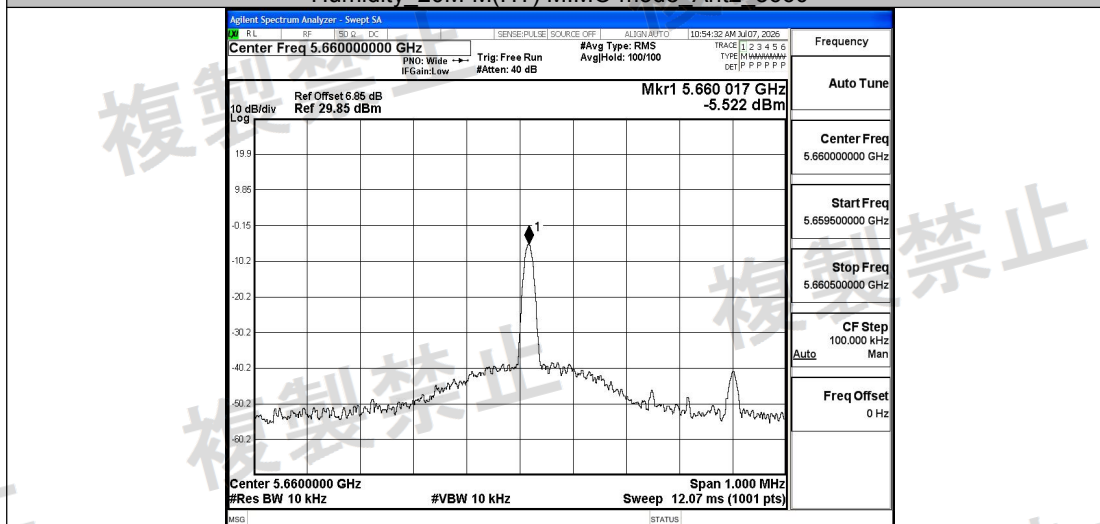


Humidity 20M-M(HT) MIMO mode_Ant1_5700

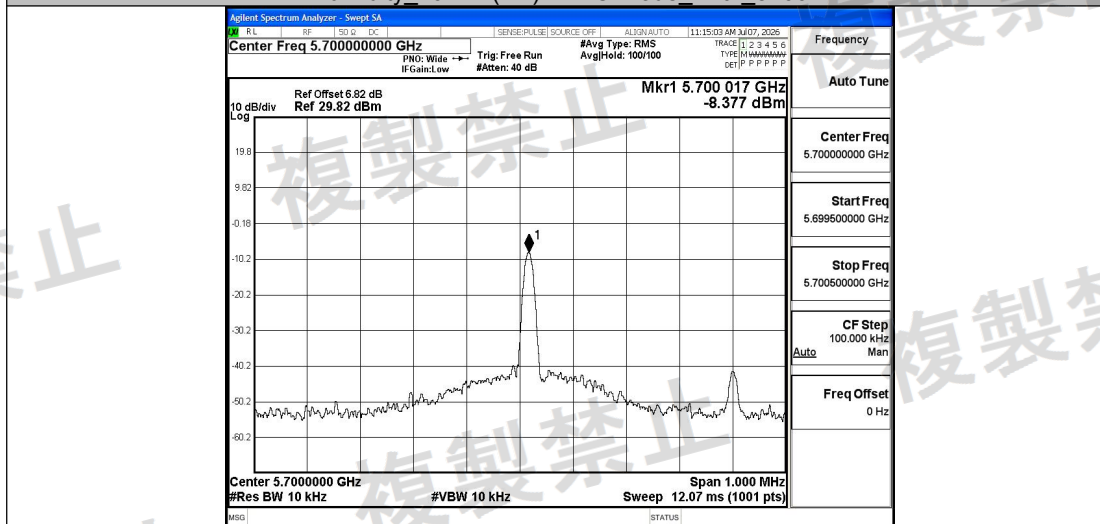


Humidity 20M-M(HT) MIMO mode_Ant2_5700

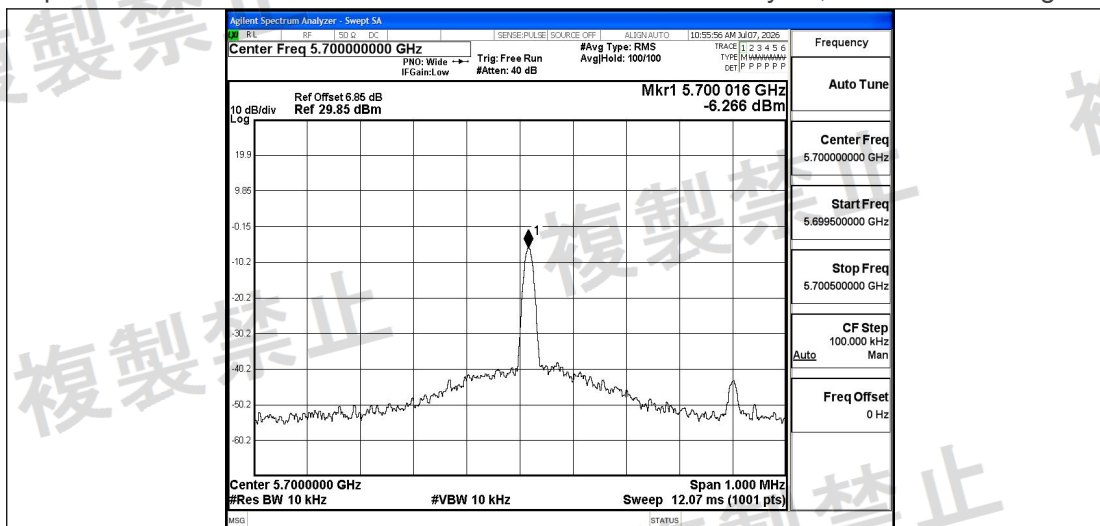

Humidity 20M-M(HT) MIMO mode Ant1 5745

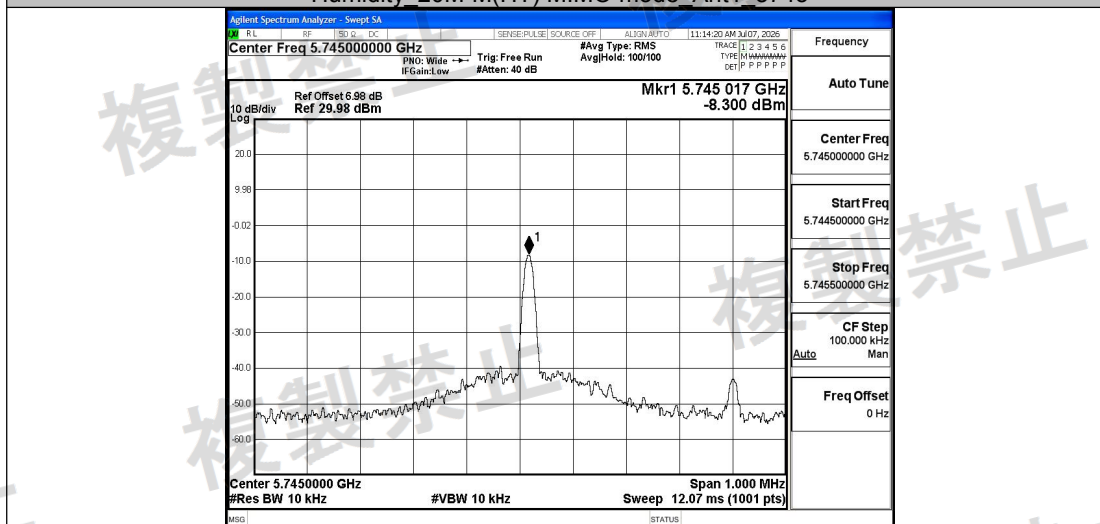

Humidity 20M-M(HT) MIMO mode Ant2 5745

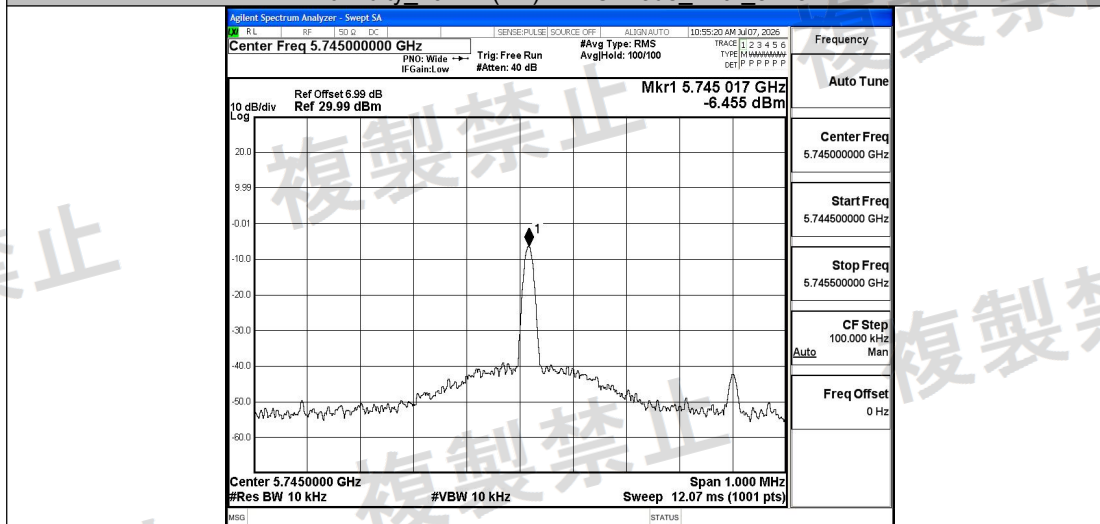

Humidity 20M-M(VHT) MIMO mode Ant1 5660