低功率射頻器材試驗報告

產品名稱	HUAWEI MatePad
申請廠商	訊崴技術有限公司
廠牌	HUAWEI
型式 (號)	BAH4-W09
產品試驗依據之標準	低功率射頻器材技術規範(LP0002) 109 年 7 月 1 日
報告發行日期	Mar. 07, 2022

填發本型式認可報告之試驗機構 (認可代號)

晶復科技股份有限公司
334025 桃園市八德區長安街 140-1 號
Tel：03-2710188 / Fax：03-2710190

財團法人全國認證基金會
認證編號 ：1330
認證有效期間：108.09.06 ~ 111.09.05
認可能量範圍：低功率射頻器材技術規範(LP0002) (頻率範圍:9 kHz to 40 GHz)

免 責 聲 明

1.本測試報告所敘述之測試結果，僅對顧客所提供之測試樣品，在此測試報告所述及之測試條件下，所實施之量測有效。
2.本測試報告未經晶復科技股份有限公司書面同意，不得部分複製本報告內容。
3.本測試報告內容之相關資訊皆由顧客提供，針對顧客所提供資訊之正確性、適當性或完整性，若有疑義或錯誤，並因此影響本測試報告結果有效性時，本實驗室不負其相關責任。

報告修訂紀錄

版本 (Rev.)	發行日期	修訂內容	修訂者
00	Mar. 07, 2022	初版發行	趙翊如

低功率射頻器材測試證明書

產 品 名 稱　：HUAWEI MatePad

廠　　牌　：HUAWEI

型　　號　：BAH4-W09

申 請 廠 商　：訊崴技術有限公司

申請者地址　：臺北市內湖區洲子街55、57號3樓

製 造 廠 商　：Huawei Device Co., Ltd.

量 測 規 範　：低功率射頻器材技術規範(LP0002) 109年7月1日

試驗實驗室　：晶復科技股份有限公司(桃園市八德區長安街140-1號)

樣品接受日期　：Feb. 16, 2022

試 驗 日 期　：Feb. 19, 2022 ~ Feb. 23, 2022

報告中所描述之測試結果與待測設備之架構組合，均根據實際量測情況作詳實的記錄。

由測試結果顯示，上述待測設備樣機確實已符合低功率射頻器材技術規範(LP0002)所規定的各項限制值。

特 此 證 明 ！

Approved By：Kai Yu Yang

(Kai Yu Yang)

目　　錄

名 稱　　頁 次
低功率射頻器材測試證明書 3
1. 一般敘述 5
1.1 待測設備一般敘述 5
1.2 其他相關聲明 7
2. 量測儀器及測試配置說明 8
2.1 量測設備 8
2.2 檢驗系統示意圖 10
2.3 輔助測試之週邊設備描述 11
2.4 測試模式 12
2.5 量測不確定度 25
2.6 試驗環境 25
3. 測試項目與結果判定總表 26
4. 測試項目表列 28
4.1 電源線傳導干擾之量測 28
4.2 2.4 GHz 檢驗項目 29
4.2.1 場強輻射之量測 29
4.2.2 峰值傳導輸出功率之量測 32
4.2.3 天線規格之要求 32
4.2.4 非必要頻帶之量測 33
4.2.5 6 dB 頻寬之要求 33
4.2.6 峰值發射電功率密度之要求 34
4.2.7 電波暴露量之評估 35
4.3 5 GHz U-NII 檢驗項目 36
4.3.1 場強輻射與非必要頻帶之量測 36
4.3.2 最大傳導輸出功率之量測 39
4.3.3 最大傳導功率頻譜密度之要求 41
4.3.4 26 dB 頻寬之要求 43
4.3.5 6 dB 頻寬之要求 43
4.3.6 發射功率控制(TPC)之量測 44
4.3.7 動態頻率選擇(DFS)之量測 45
4.3.8 頻道可用性檢查時間之量測 46
4.3.9 頻道移動時間之量測 47
4.3.10 不可佔用時間之量測 48
4.3.11 天線規格之要求 49
4.3.12 電波暴露量之評估 49
5. Test Results 50
5.1 Conducted Emission 50
5.2 Radiated Emission Measurement (2.4 GHz) 52
5.3 Conducted Test Results (2.4 GHz) 110
5.4 Radiated Emission Measurement (5 GHz) 133
5.5 Conducted Test Results (5 GHz) 307
6. EUT Photos 348
Appendix A. Test Setup Photographs

1. 一般敘述

1.1 待測設備一般敘述

本敘述僅針對產品簡單說明之，其他詳細之規格請參考使用說明書。

產品名稱	HUAWEI MatePad	
廠牌	HUAWEI	
型號	BAH4-W09	
額定電源	輸入：DC 5 V, 2 A OR DC 9 V, 2A OR DC 10 V, 2.25 A 輸出：DC 5 V, 1 A (USB Type-C)	
待測物電源類別	Power Adapter / Battery	
調變方式	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n 2.4 GHz 20 MHz / 40 MHz : OFDM IEEE 802.11a U-NII Band: OFDM IEEE 802.11n 5 GHz 20 MHz / 40 MHz U-NII Band: OFDM IEEE 802.11ac 20 MHz / 40 MHz / 80 MHz U-NII Band: OFDM *此產品之不具有動態選擇(DFS)之雷達偵測功能 (Client without radar detection function)	
頻率使用範圍	Mode	Frequency (MHz)
	IEEE 802.11b / EEE 802.11g IEEE 802.11n 2.4 GHz 20 MHz	2412 – 2462
	IEEE 802.11n 2.4 GHz 40 MHz	2422 – 2452
	IEEE 802.11a / IEEE 802.11n 5 GHz 20 MHz U-NII Band I IEEE 802.11ac 20 MHz U-NII Band I	5180 – 5240
	IEEE 802.11a / IEEE 802.11n 5 GHz 20 MHz U-NII Band II-A IEEE 802.11ac 20 MHz U-NII Band II-A	5260 – 5320
	IEEE 802.11a / IEEE 802.11n 5 GHz 20 MHz U-NII Band II-C IEEE 802.11ac 20 MHz U-NII Band II-C	5500 – 5700
	IEEE 802.11a / IEEE 802.11n 5 GHz 20 MHz U-NII Band III IEEE 802.11ac 20 MHz U-NII Band III	5745 – 5825
	IEEE 802.11n 5 GHz 40 MHz U-NII Band I IEEE 802.11ac 40 MHz U-NII Band I	5190 – 5230
	IEEE 802.11n 5 GHz 40 MHz U-NII Band II-A IEEE 802.11ac 40 MHz U-NII Band II-A	5270 – 5310
	IEEE 802.11n 5 GHz 40 MHz U-NII Band II-C IEEE 802.11ac 40 MHz U-NII Band II-C	5510 – 5670
	IEEE 802.11n 5 GHz 40 MHz U-NII Band III IEEE 802.11ac 40 MHz U-NII Band III	5755 – 5795
	IEEE 802.11ac 80 MHz U-NII Band I	5210
	IEEE 802.11ac 80 MHz U-NII Band II-A	5290
	IEEE 802.11ac 80 MHz U-NII Band II-C	5530 – 5610
	IEEE 802.11ac 80 MHz U-NII Band III	5775

天線資訊	Antenna	廠牌	型號	型態	增益值(dBi)	
					2.4 GHz	5 GHz
	ANT-0	HUAWEI	BAH-W09	IFA Antenna	-0.7	-0.4

RF 最大輸出功率	Mode	Power	
	IEEE 802.11b	17.66 dBm	0.058 W
	IEEE 802.11g	23.56 dBm	0.227 W
	IEEE 802.11n 2.4 GHz 20 MHz	23.09 dBm	0.204 W
	IEEE 802.11n 2.4 GHz 40 MHz	22.89 dBm	0.195 W
	IEEE 802.11a U-NII Band I	15.53 dBm	0.036 W
	IEEE 802.11a U-NII Band II-A	16.13 dBm	0.041 W
	IEEE 802.11a U-NII Band II-C	15.68 dBm	0.037 W
	IEEE 802.11a U-NII Band III	16.27 dBm	0.042 W
	IEEE 802.11n 5 GHz 20 MHz U-NII Band I	15.61 dBm	0.036 W
	IEEE 802.11n 5 GHz 20 MHz U-NII Band II-A	16.13 dBm	0.041 W
	IEEE 802.11n 5 GHz 20 MHz U-NII Band II-C	15.56 dBm	0.036 W
	IEEE 802.11n 5 GHz 20 MHz U-NII Band III	16.20 dBm	0.042 W
	IEEE 802.11n 5 GHz 40 MHz U-NII Band I	16.24 dBm	0.042 W
	IEEE 802.11n 5 GHz 40 MHz U-NII Band II-A	17.04 dBm	0.051 W
	IEEE 802.11n 5 GHz 40 MHz U-NII Band II-C	15.58 dBm	0.036 W
	IEEE 802.11n 5 GHz 40 MHz U-NII Band III	15.84 dBm	0.038 W
	IEEE 802.11ac 20 MHz U-NII Band I	15.68 dBm	0.037 W
	IEEE 802.11ac 20 MHz U-NII Band II-A	16.25 dBm	0.042 W
	IEEE 802.11ac 20 MHz U-NII Band II-C	15.69 dBm	0.037 W
	IEEE 802.11ac 20 MHz U-NII Band III	16.25 dBm	0.042 W
	IEEE 802.11ac 40 MHz U-NII Band I	16.31 dBm	0.043 W
	IEEE 802.11ac 40 MHz U-NII Band II-A	17.08 dBm	0.051 W
	IEEE 802.11ac 40 MHz U-NII Band II-C	15.62 dBm	0.036 W
	IEEE 802.11ac 40 MHz U-NII Band III	15.98 dBm	0.040 W
	IEEE 802.11ac 80 MHz U-NII Band I	6.42 dBm	0.004 W
	IEEE 802.11ac 80 MHz U-NII Band II-A	7.17 dBm	0.005 W
	IEEE 802.11ac 80 MHz U-NII Band II-C	6.89 dBm	0.005 W
	IEEE 802.11ac 80 MHz U-NII Band III	16.21 dBm	0.042 W

設備類型		
Outdoor access point	point-to-point	---
	point-to-multipoint	---
Indoor access point		---
Fixed point-to-point access points		---
Client devices		V

輸出/輸入埠說明：

輸 出 / 入 埠		數量	介面內容說明
1	USB Type-C Port	1	連接至電源供應器 / 耳機 / 多媒體終端
2	Card Port	1	連接至 Micro SD card

附屬裝置表

裝置名稱		廠牌	型號	備註
(A)	內建固定式電池	HUAWEI	HB26D8C8ECW-12	DC 3.82 V, 7150 mAh / 27.31 Wh 製造商：Shenzhen Sunwoda Intelligence Technology Co., Ltd.
(B)	內建固定式電池	HUAWEI	HB26D8C8ECW-12	DC 3.82 V, 7150 mAh / 27.31 Wh 製造商：Huizhou Desay Battery Co., Ltd.
(C)	電源供應器	HUAWEI	HW-100225U00	INPUT ：100-240 VAC, 50-60 Hz, 0.75 A OUTPUT：5.0 VDC, 2.0 A or 9.0 VDC, 2.0 A or 10.0 VDC, 2.25 A 製造商(1) : HUIZHOU BYD ELECTRONIC CO.,LTD. 製造商(2) : SHENZHEN HUNTKEY ELECTRIC CO.,LTD.
(D)	USB Cable	HUAWEI	WA0072	STD-A → Type-C
(E)	USB Cable	HUAWEI	L99UC154-CS-H	STD-A → Type-C
(F)	USB Cable	HUAWEI	CUDU01B-HC450-EH	STD-A → Type-C
(G)	USB Cable	HUAWEI	AU2-CHO013HF	STD-A → Type-C
(H)	USB Cable	HUAWEI	213-01374-0	STD-A → Type-C

1.2 其他相關聲明

本測試報告屬(以下選擇一種打■)

■	申請新的型式檢驗認可的測試.
□	已取得型式檢驗認可之商品,因設計變更而重新測試. 登錄號碼: XXXXXXXX

2. 量測儀器及測試配置說明

2.1 量測設備

For Conducted Emission
Test Period: Feb. 19, 2022
Testing Engineer: Louis Shen

Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Test Receiver	R&S	ESCI	100367	May 21, 2021	1 year
☐	Test Receiver	R&S	ESCI	100722	Nov. 02, 2021	1 year
☐	Test Receiver	R&S	ESCI	101000	Nov. 26, 2021	1 year
☒	LISN	R&S	ENV216	101040	Mar. 29, 2021	1 year
☒	LISN	R&S	ENV216	101041	Apr. 08, 2021	1 year
☒	RF Cable	Woken	00100D1380194M	TE-02-03	May 28, 2021	1 year
☒	Software	EZ EMC	1.1.4.3	N/A	N.C.R.	---

Note: N.C.R. = No Calibration Request.

For Conducted
Test Period: Feb. 22 ~ Feb. 23, 2022
Testing Engineer: Brian Lin、Peter Shui

Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Power Sensor	Anritsu	MA2411B	1126022	Sep. 03, 2021	1 year
☒	Power Meter	Anritsu	ML2495A	1135009	Sep. 03, 2021	1 year
☐	Power Sensor	Agilent	N1921A	MY45241957	Dec. 06, 2021	1 year
☐	Power Meter	Agilent	N1911A	MY45101619	Dec. 06, 2021	1 year
☒	Spectrum Analyzer (10 Hz~26.5 GHz)	Keysight	N9010B	MY59071418	Mar. 17, 2021	1 year
☐	Spectrum Analyzer (9 kHz~26.5 GHz)	Agilent	N9010A	MY48030518	Jul. 23, 2021	1 year
☒	Spectrum Analyzer (20 Hz~26.5 GHz)	Agilent	N9020A	US47520902	Sep. 09, 2021	1 year
☐	Spectrum Analyzer (3 Hz~50 GHz)	Agilent	N9030A	MY53120541	Jan. 05, 2022	1 year
☐	Temperature & Humidity Chamber	TAICHY	MHU-225LA	980729	Mar. 30, 2021	1 year
☒	Signal Generator	Keysight	N5182B	MY53052569	Apr. 20, 2021	1 year
☒	Signal Generator	Keysight	N5182BX07	MY59360221	Apr. 20, 2021	1 year
☐	Bluetooth Tester	R&S	CBT	100350	Mar. 17, 2021	2 years
☐	Wireless Connectivity Tester	R&S	CMW270	102208	Jun. 02, 2021	1 year
☐	Power Supply	KEITHLEY	2303	4045290	Jan. 19, 2022	1 year
☐	RF Communication Test Set	HP	8920A	3344A03297	Aug. 10, 2021	1 year

Note: N.C.R. = No Calibration Request.


For Radiated Emissions
Test Period: Feb. 19 ~ Feb. 23, 2022
Testing Engineer: Hung Chou, Marc Yeh

Radiation test sites		Semi Anechoic Room				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☐	Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9010A	MY52221312	Jan. 13, 2022	1 year
☐	Spectrum Analyzer (3 Hz~50 GHz)	Agilent	N9030A	MY53120541	Jan. 05, 2022	1 year
☒	Spectrum Analyzer (2 Hz~50 GHz)	Keysight	N9030B	MY57143537	Apr. 19, 2021	1 year
☒	Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A11119	Jan. 14, 2022	1 year
☐	Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A10961	Jul. 06, 2021	1 year
☐	Broadband Amplifier (100 kHz~1 GHz)	Titan	T0910E00014330A1F	001	Jul. 23, 2021	1 year
☐	Amplifier (1 GHz~26.5 GHz)	Agilent	8449B	3008A02237	Oct. 21, 2021	1 year
☒	Broadband Amplifier (1 GHz~26.5 GHz)	Titan	T0912E01263025A1F	002	Jul. 26, 2021	1 year
☒	Preamplifier (26.5 GHz~40 GHz)	EMCI	EMC2654045	980028	Aug. 19, 2021	1 year
☐	Loop Antenna (9 kHz~30 MHz)	COM-POWER CORPORATION	AL-130	121014	Apr. 07, 2021	1 year
☒	Trilog Broadband Antenna (30 kHz~1 GHz)	Schwarzbeck Mess-Elektronik	VULB9168	01146	Jul. 19, 2021	1 year
☐	Trilog Broadband Antenna (30 kHz~1 GHz)	Schwarzbeck Mess-Elektronik	VULB9168	416	Nov. 17, 2021	1 year
☒	Broadband Horn Antenna (1 GHz~18 GHz)	Schwarzbeck Mess-Elektronik	9120D	02207	Jul. 09, 2021	1 year
☐	Broadband Horn Antenna (1 GHz~18 GHz)	Schwarzbeck Mess-Elektronik	9120D	9120D-550	Aug. 24, 2021	1 year
☒	Broadband Horn Antenna (18 GHz~40 GHz)	Schwarzbeck Mess-Elektronik	9170	9170-320	Aug. 24, 2021	1 year
☐	Horn Antenna (18 GHz~40 GHz)	ETS	3116	00086467	Dec. 03, 2021	1 year
☐	RF Cable	EMCI	EMC104-N-N-6000	TE01-1	Feb. 19, 2021	1 year
☐	Microwave Cable	EMCI	EMC104-SM-SM-13000	170814	Feb. 19, 2021	1 year
☐	Microwave Cable	EMCI	EMC102-KM-KM-14000	151001	Feb. 19, 2021	1 year
☒	Coaxial Cable	Titan	T0710AT327A10A100	J11005	Aug. 06, 2021	1 year
☒	Coaxial Cable	Titan	T0710AT327A10A900	J11004	Aug. 06, 2021	1 year
☒	Coaxial Cable	Titan	CFD400NL-LW	001	Aug. 06, 2021	1 year
☐	Bluetooth Tester	R&S	CBT	100350	Mar. 17, 2021	2 years
☐	Wireless Connectivity Tester	R&S	CMW270	102208	Jun. 02, 2021	1 year
☐	Power Supply	KEITHLEY	2303	4045290	Jan. 19, 2022	1 year
☒	Software	EZ EMC	1.1.4.4	N/A	N.C.R.	---


Note: N.C.R. = No Calibration Request.

2.2 檢驗系統示意圖

電源傳導干擾測試配置&輻射干擾測試配置(Below 1 GHz)

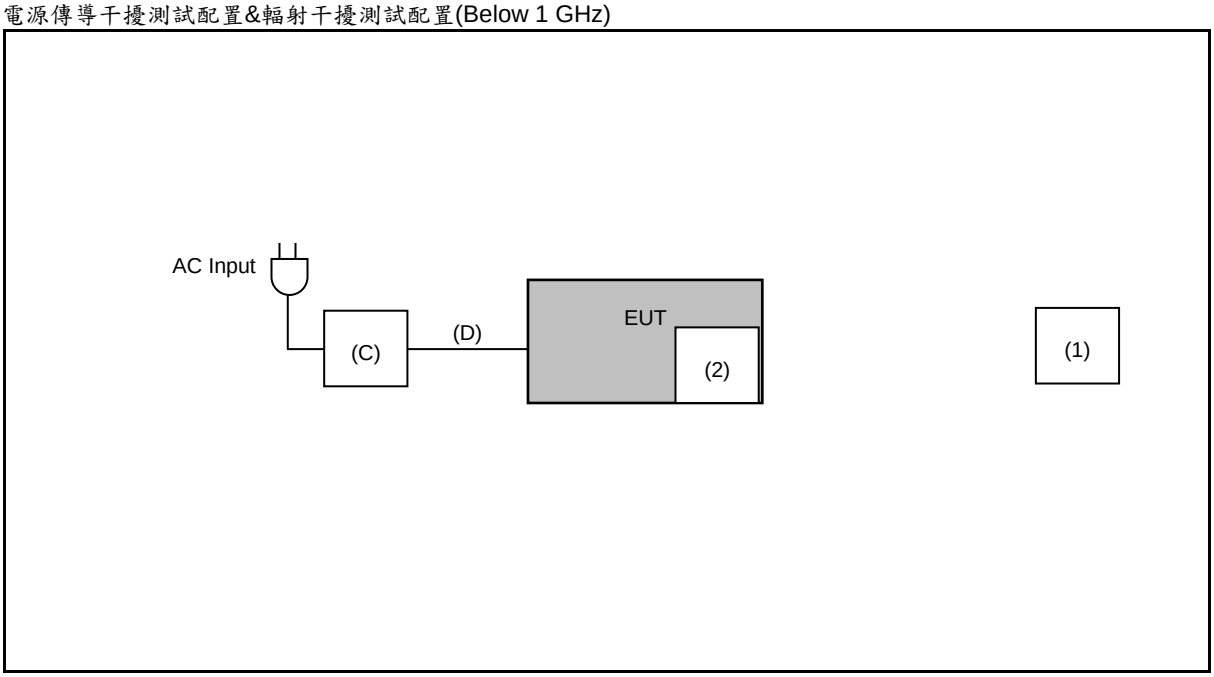

輻射干擾測試配置(Above 1 GHz)

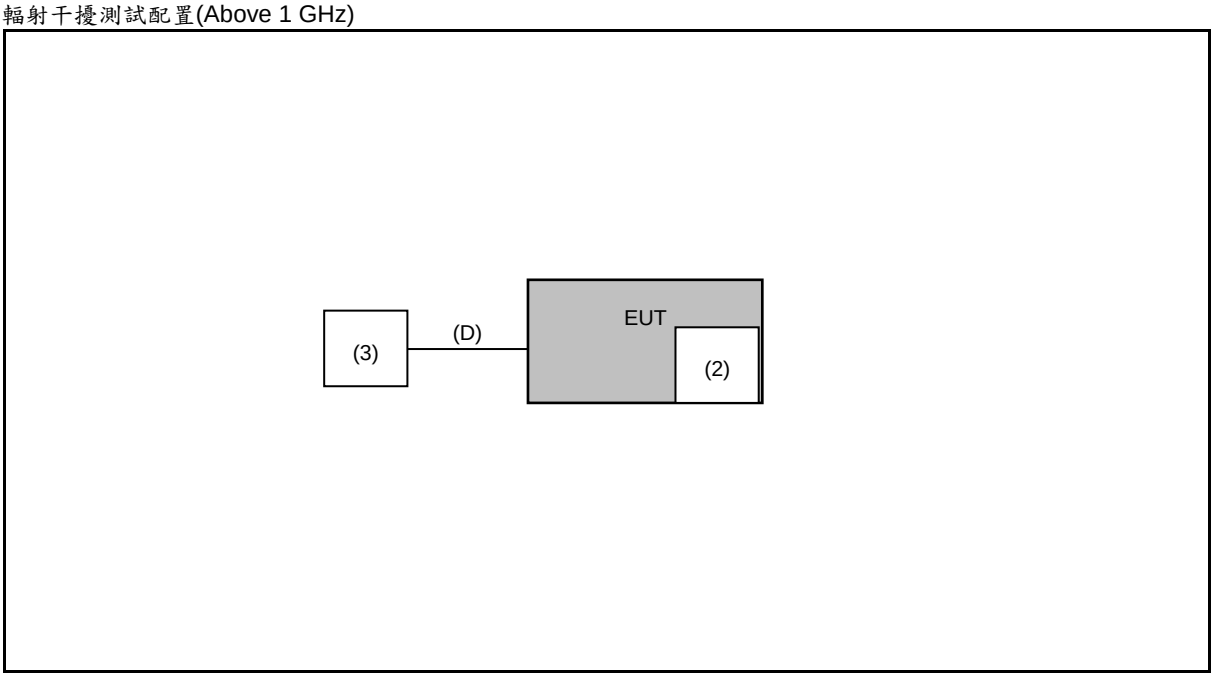

2.3 輔助測試之週邊設備描述

下列輔助設備或配件為測試中所使用，以形成一個代表性的受測系統。

週邊名稱		廠 牌	型 號	電源線	備 註
(1)	Access Point	ASUS	RT-AX88U	---	NCC ID : CCAF18LP1530T1 (實驗室提供)
(2)	Micro SD Card	Transcend	9153BA 8G 07DS1	---	容量：8 GB (實驗室提供)
(3)	Notebook	acer	N19C1	---	(實驗室提供)
(4)	HUAWEI MatePad	HUAWEI	BAH4-W09	---	無線功能 ：Bluetooth / WLAN (申請者提供)

測試組合：

EUT Configure Mode	CE	RE<1G	RE≧1G	備註
內建固定式電池	V	V	V	附屬裝置(A)
內建固定式電池				附屬裝置(B)
電源供應器	V	V	---	附屬裝置(C) 製造商(1)
USB Cable	V	V	V	附屬裝置(D)
USB Cable				附屬裝置(E)
USB Cable				附屬裝置(F)
USB Cable				附屬裝置(G)
USB Cable				附屬裝置(H)
Access Point	V	V	X	測試週邊(1) Normal Link
Micro SD Card	V	V	V	測試週邊(2)
Notebook	X	X	V	測試週邊(3) Test mode使用
HUAWEI MatePad	X		---	測試週邊(4) Type-C充電

RE≧1 GHz：Radiated Emission above 1 GHz & Bandedge Measurement
RE<1 GHz：Radiated Emission below 1 GHz
CE：Conducted Emission
V：Final mode
X：Non support
---：No evaluation required
Blank Space：Pre-test mode

2.4 測試模式

使用定頻模式量測

Pre-Test Mode
Mode 1: Transmit Mode
Mode 2: IEEE 802.11b Continuous TX Mode
Mode 3: IEEE 802.11g Continuous TX Mode
Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode
Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode
Mode 6: IEEE 802.11a Continuous TX Mode
Mode 7: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode
Mode 8: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode
Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode
Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode
Mode 11: IEEE 802.11ac 80 MHz Continuous TX Mode
Mode 12: Receiver Mode

Final-Test Mode
Mode 1: Transmit Mode
Mode 2: IEEE 802.11b Continuous TX Mode
Mode 3: IEEE 802.11g Continuous TX Mode
Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode
Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode
Mode 6: IEEE 802.11a Continuous TX Mode
Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode
Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode
Mode 11: IEEE 802.11ac 80 MHz Continuous TX Mode
Mode 12: Receiver Mode

Note : Investigation has been done on all the possible configurations for searching the worst cases (VHT20/VHT40 covers HT20/HT40). The table is a list of the test modes show in this test report.

Test Mode	Frequency (MHz)	RF Power setting in Test Software	Test Software Version
		ANT-0	
Mode 2	2412	Default	Batch file(.bat)
	2437	Default	
	2462	Default	
Mode 3	2412	Default	
	2437	Default	
	2462	Default	
Mode 4	2412	Default	
	2437	Default	
	2462	Default	
Mode 5	2422	Default	
	2437	Default	
	2452	Default	

Test Mode	Frequency (MHz)	RF Power setting in Test Software	Test Software Version
		ANT-0	
Mode 6	5180	Default	Batch file(.bat)
	5200	Default	
	5220	Default	
	5240	Default	
	5260	Default	
	5280	Default	
	5300	Default	
	5320	Default	
	5500	Default	
	5520	Default	
	5540	Default	
	5560	Default	
	5580	Default	
	5600	Default	
	5620	Default	
	5640	Default	
	5660	Default	
	5680	Default	
	5700	Default	
	5745	Default	
	5765	Default	
	5785	Default	
	5805	Default	
	5825	Default	

Test Mode	Frequency (MHz)	RF Power setting in Test Software	Test Software Version
		ANT-0	
Mode 7	5180	Default	Batch file(.bat)
	5200	Default	
	5220	Default	
	5240	Default	
	5260	Default	
	5280	Default	
	5300	Default	
	5320	Default	
	5500	Default	
	5520	Default	
	5540	Default	
	5560	Default	
	5580	Default	
	5600	Default	
	5620	Default	
	5640	Default	
	5660	Default	
	5680	Default	
	5700	Default	
	5745	Default	
	5765	Default	
	5785	Default	
	5805	Default	
	5825	Default	

Test Mode	Frequency (MHz)	RF Power setting in Test Software	Test Software Version
		ANT-0	
Mode 8	5190	Default	Batch file(.bat)
	5230	Default	
	5270	Default	
	5310	Default	
	5510	Default	
	5550	Default	
	5590	Default	
	5630	Default	
	5670	Default	
	5755	Default	
	5795	Default	

Test Mode	Frequency (MHz)	RF Power setting in Test Software	Test Software Version
		ANT-0	
Mode 9	5180	Default	Batch file(.bat)
	5200	Default	
	5220	Default	
	5240	Default	
	5260	Default	
	5280	Default	
	5300	Default	
	5320	Default	
	5500	Default	
	5520	Default	
	5540	Default	
	5560	Default	
	5580	Default	
	5600	Default	
	5620	Default	
	5640	Default	
	5660	Default	
	5680	Default	
	5700	Default	
	5745	Default	
	5765	Default	
	5785	Default	
	5805	Default	
	5825	Default	

Test Mode	Frequency (MHz)	RF Power setting in Test Software	Test Software Version
		ANT-0	
Mode 10	5190	Default	Batch file(.bat)
	5230	Default	
	5270	Default	
	5310	Default	
	5510	Default	
	5550	Default	
	5590	Default	
	5630	Default	
	5670	Default	
	5755	Default	
	5795	Default	
Mode 11	5210	Default	Batch file(.bat)
	5290	Default	
	5530	Default	
	5610	Default	
	5775	Default	


Test Mode	ANT-0
Mode 2	V
Mode 3	V
Mode 4	V
Mode 5	V
Mode 6	V
Mode 7	V
Mode 8	V
Mode 9	V
Mode 10	V
Mode 11	V


Test Mode	Antenna Delivery	Data Rate (Mbps)	Test Channel
Mode 2	1TX / 1RX	1	1, 6, 11
Mode 3	1TX / 1RX	6	1, 6, 11
Mode 4	1TX / 1RX	6.5	1, 6, 11
Mode 5	1TX / 1RX	13.5	3, 6, 9
Mode 6	1TX / 1RX	6	36, 40, 48, 52, 56, 64, 100, 112, 140, 149, 157, 165
Mode 7	1TX / 1RX	6.5	36, 40, 48, 52, 56, 64, 100, 112, 140, 149, 157, 165
Mode 8	1TX / 1RX	13.5	38, 46, 54, 62, 102, 110, 134, 151, 159
Mode 9	1TX / 1RX	6.5	36, 40, 48, 52, 56, 64, 100, 112, 140, 149, 157, 165
Mode 10	1TX / 1RX	13.5	38, 46, 54, 62, 102, 110, 134, 151, 159
Mode 11	1TX / 1RX	29.3	42, 58, 106, 122, 155

Duty cycle


Test Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimun VBW (kHz)
Mode 2	2412	30.000	30.000	1.000	0.000	0.010
Mode 3	2412	2.742	2.765	0.992	0.036	0.010
Mode 4	2412	2.561	2.584	0.991	0.039	0.010
Mode 5	2422	1.265	1.285	0.984	0.068	0.010
Mode 6	5180	2.760	2.780	0.993	0.031	0.010
Mode 9	5180	2.580	2.600	0.992	0.034	0.010
Mode 10	5190	1.265	1.295	0.977	0.102	0.791
Mode 11	5210	0.606	0.640	0.947	0.237	1.650


Mode 2: IEEE 802.11b Continuous TX Mode	
On+off time	

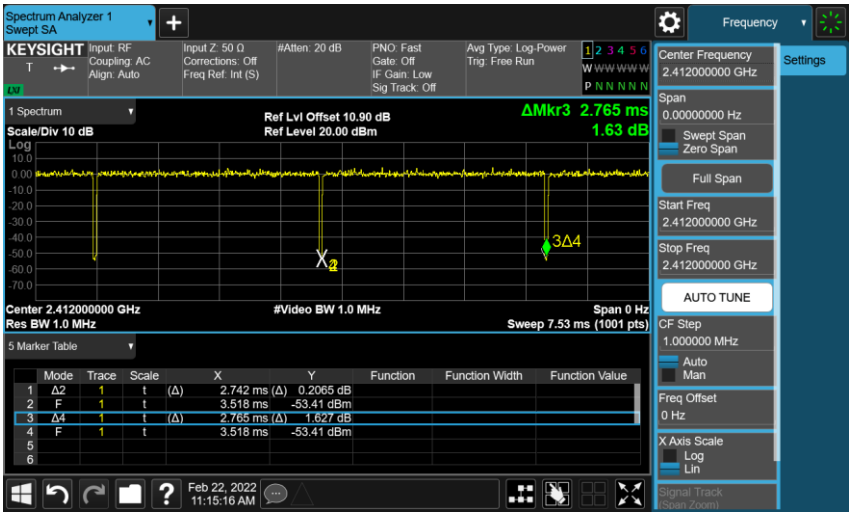
Mode 3: IEEE 802.11g Continuous TX Mode	
On+off time	

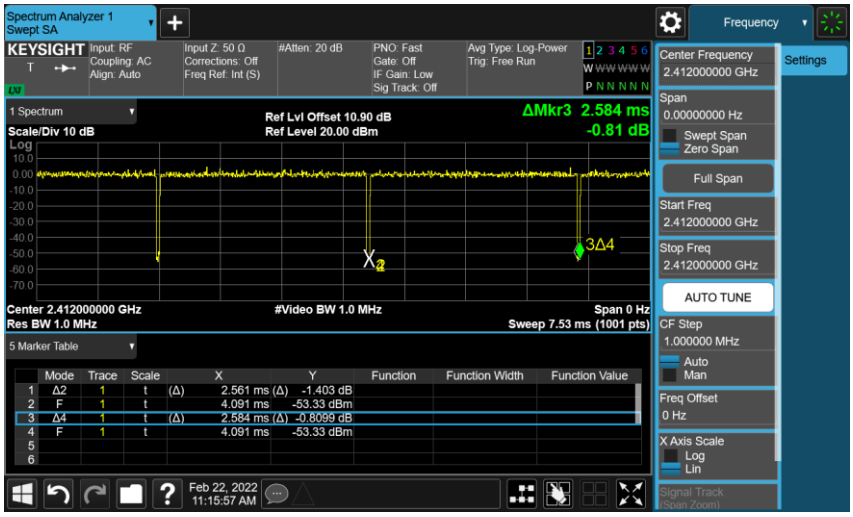
Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode	
On+off time	

Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode	
On+off time	

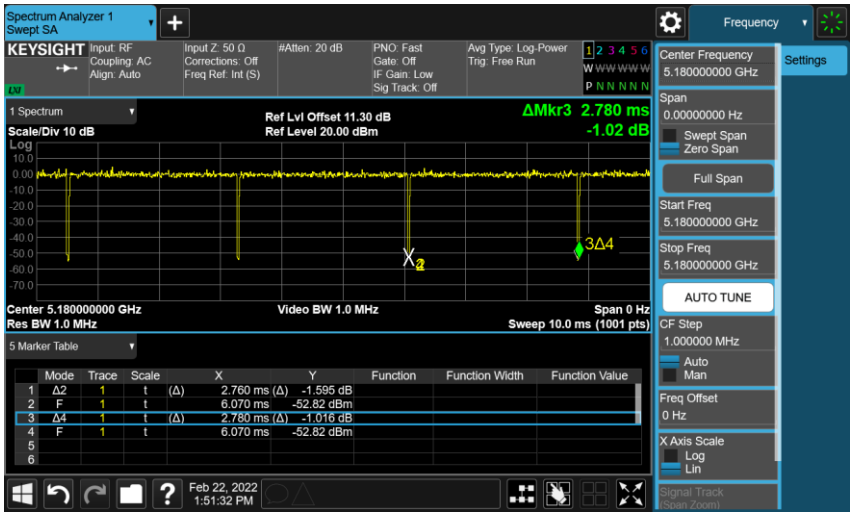Mode 6: IEEE 802.11a Continuous TX Mode	
On+off time	

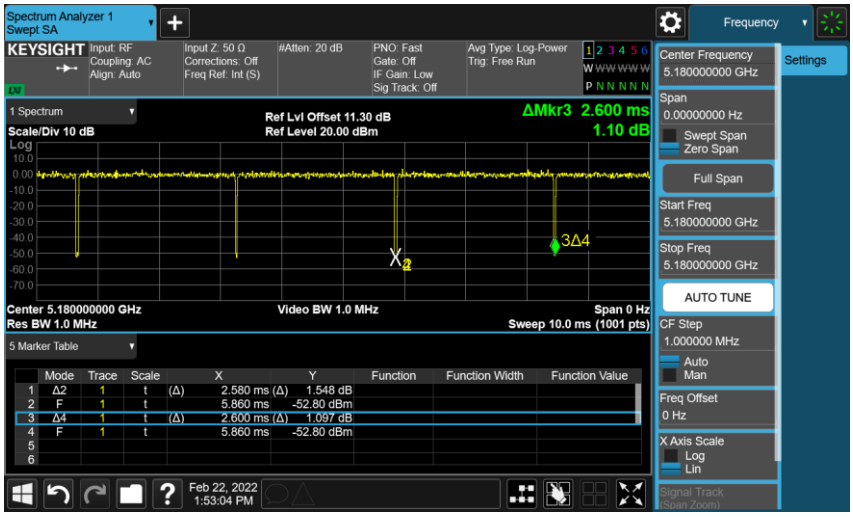Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode	
On+off time	

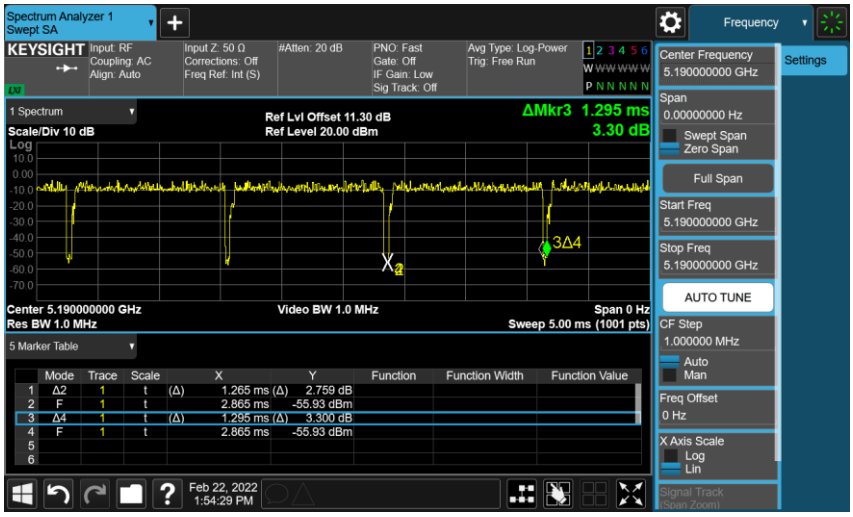Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode	
On+off time	

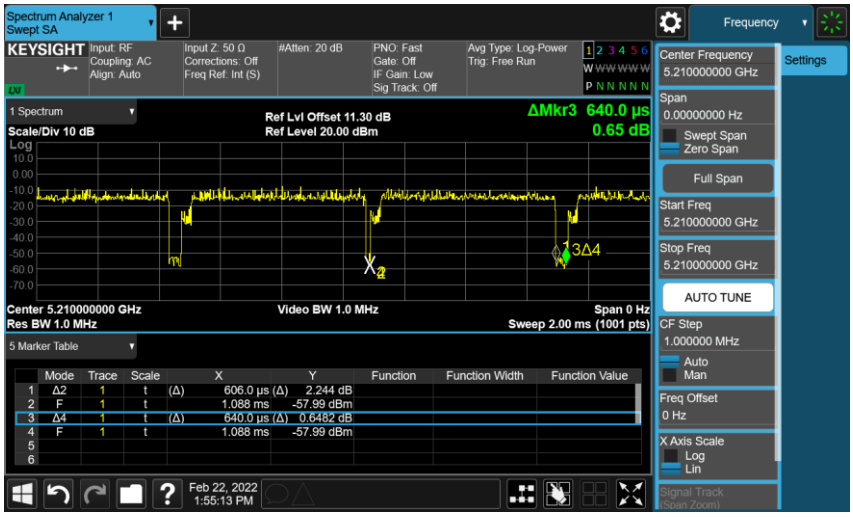Mode 11: IEEE 802.11ac 80 MHz Continuous TX Mode	
On+off time	

2.5 量測不確定度

下列量測不確定水準是參照量測儀器 CISPR 16-4-2 所規定之不確定度。

Test Item	Frequency	Uncertainty
Conducted Emission	150 kHz ~ 30 MHz	2.7 dB
Radiated Emission	9 kHz ~ 30 MHz	2.2 dB
	30 MHz ~ 1000 MHz	5.1 dB
	1000 MHz ~ 18000 MHz	5.2 dB
	18000 MHz ~ 26500 MHz	4.6 dB
	26500 MHz ~ 40000 MHz	4.6 dB
Conducted Output Power		1.1 dB
RF Bandwidth		4.7 %
Power Spectral Density		1.1 dB
Duty Cycle		1.1 %

2.6 試驗環境

產品測試時之實驗室環境條件如下:

項 目	測 試 項 目	需 求	實 際
溫度 Temperature (°C)	LP0002	10 - 40	20 - 30
濕度 Humidity (%RH)		10 - 90	45 - 75

3. 測試項目與結果判定總表

本測試報告之所有項目皆依據 NCC 低功率射頻器材技術規範(LP0002)之檢驗法。

2.4 GHz 頻段適用下列表格

項次	測試項目	適用規範	測試結果	量測設備	結果判定
1	電源線傳導干擾(*)	低功率射頻器材技術規範 3.3 節	請參閱 5.1 節	請參閱 2.1 節	符合
2	場強輻射其它不必要之訊號 (1 GHz 以下) (*)	低功率射頻器材技術規範 3.5 節、3.6 節、4.10.1.5 節	請參閱 5.2 節	請參閱 2.1 節	符合
3	場強輻射 (1 GHz 以上)	低功率射頻器材技術規範 3.5 節、3.6 節、4.10.1.5 節	請參閱 5.2 節	請參閱 2.1 節	符合
4	頻帶邊緣外之輻射發射	低功率射頻器材技術規範 4.10.1.5 節	請參閱 5.2 節	請參閱 2.1 節	符合
5	峰值傳導輸出功率	低功率射頻器材技術規範 4.10.1.2(1)(C)節	請參閱 5.3 節	請參閱 2.1 節	符合
6	天線規格	低功率射頻器材技術規範 4.10.1.3(3)、4.10.1.4 節	請參閱 4.2.3 節	-------	符合
7	非必要頻帶	低功率射頻器材技術規範 4.10.1.5(1)節	請參閱 5.3 節	請參閱 2.1 節	符合
8	6 dB 頻寬	低功率射頻器材技術規範 4.10.1.6(2)(A)節	請參閱 5.3 節	請參閱 2.1 節	符合
9	峰值發射電功率密度	低功率射頻器材技術規範 4.10.1.6(2)(B)節	請參閱 5.3 節	請參閱 2.1 節	符合
10	電波暴露量之評估	低功率射頻器材技術規範 6.20.2 節	請參閱 5.5 節	請參閱 2.1 節	符合

* 此項目為在 RF 功能作動下進行

本產品透過預測試場強輻射確認 X、Y 和 Z 個軸中最差之結果軸向為 Z 軸，因此場強輻射完整測試 Z 軸並將其結果記錄於報告中。

5 GHz U-NII 頻段適用下列表格

項次	測試項目	適用規範	測試結果	量測設備	結果判定
1	電源線傳導干擾(*)	低功率射頻器材技術規範3.3 節	請參閱 5.1 節	請參閱 2.1 節	符合
2	場強輻射其它不必要之訊號 (1 GHz 以下) (*)	低功率射頻器材技術規範 3.5 節、3.6 節	請參閱 5.4 節	請參閱 2.1 節	符合
3	場強輻射 (1 GHz 以上)	低功率射頻器材技術規範 3.5 節、3.6 節	請參閱 5.4 節	請參閱 2.1 節	符合
4	頻帶邊緣外之輻射發射	低功率射頻器材技術規範 3.6 節、5.7.4 節	請參閱 5.4 節	請參閱 2.1 節	符合
5	非必要頻帶	低功率射頻器材技術規範 5.7.4 節	請參閱 5.5 節	請參閱 2.1 節	符合
6	最大傳導輸出功率	低功率射頻器材技術規範 5.7.3 節	請參閱 5.5 節	請參閱 2.1 節	符合
7	最大傳導功率頻譜密度	低功率射頻器材技術規範 5.7.3 節	請參閱 5.5 節	請參閱 2.1 節	符合
8	26 dB 頻寬之要求	N/A	請參閱 5.5 節	請參閱 2.1 節	----
9	6 dB 頻寬之要求	低功率射頻器材技術規範 5.7.5 節	請參閱 5.5 節	請參閱 2.1 節	符合
10	發射功率控制(TPC)	低功率射頻器材技術規範 5.7.7.1 節	請參閱 5.5 節	請參閱 2.1 節	符合
11	動態頻率選擇(DFS) 雷達偵測功能	低功率射頻器材技術規範 5.7.7.2 節	N/A	N/A	不適用
12	動態頻率選擇(DFS) 頻道可用性檢查時間	低功率射頻器材技術規範 5.7.7.2(3)節	N/A	N/A	不適用
13	動態頻率選擇(DFS) 頻道移動時間	低功率射頻器材技術規範 5.7.7.2(4)節	請參閱 5.5 節	請參閱 2.1 節	符合
14	動態頻率選擇(DFS) 不可佔用時間	低功率射頻器材技術規範 5.7.7.2(5)節	請參閱 5.5 節	請參閱 2.1 節	符合
15	天線規格	低功率射頻器材技術規範 5.7.8 節	請參閱 4.3.11 節	-------	符合
16	電波暴露量之評估	低功率射頻器材技術規範 6.20.2 節	請參閱 5.5 節	請參閱 2.1 節	符合

* 此項目為在 RF 功能作動下進行

本產品透過預測試場強輻射確認 X、Y 和 Z 個軸中最差之結果軸向為 Z 軸，因此場強輻射完整測試 Z 軸並將其結果記錄於報告中。

Decision Rule

■ Uncertainty is not included.

□ Uncertainty is included.

4. 測試項目表列

4.1 電源線傳導干擾之量測

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之 3.3 節，以市電為電源之低功率射頻器材，其傳導回電源線上頻率自 150 kHz 至 30 MHz 之射頻電壓 (在電源端子每一電源線對接地點) 不得超過下表所列之限值。測量時應經過 50 Ω//50 μH 之電源線阻抗模擬網路 (LISN)。頻率重疊處，以較低限值為準。

Frequency (MHz)	傳導限制值 (dBuV)	
	準峰值 (Quasi – peak)	平均值 (Average)
0.15 – 0.5	66 - 56 (註)	56 - 46 (註)
0.5 – 5	56	46
5 - 30	60	50

註：隨頻率之對數遞減。

測試方法 :

測試場地為標準傳導測試場地。將待測物置於 0.8 米高的非金屬桌面，使其在工作狀態，待測物電源線接至電源線阻抗穩定網路上，從測試接收機記錄頻率由 0.15 MHz 至 30 MHz 之間之電源線傳導放射強度。


干擾值之計算

電源傳導干擾電壓之計算公式如下

結果值 = 儀器讀值(QP/AV) + 校正因子

其中校正因子為： 饋線損失 + 電源阻抗模擬網路損失

測試架構圖 :

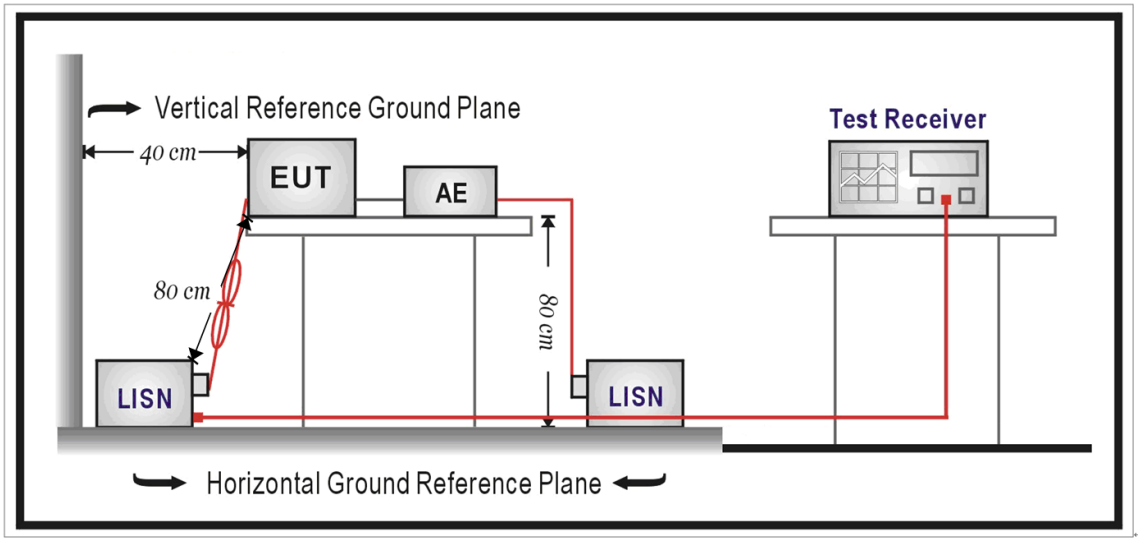

4.2 2.4 GHz 檢驗項目

4.2.1 場強輻射之量測

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之使用頻帶範圍外之任意 100 千赫 (kHz)內，發射機所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之 100 千赫(kHz)內的射頻功率，至少須衰減 20 dB，以射頻傳導或輻射方式測量。如發射機以依據 NCC 低功率射頻器材技術規範(LP0002)之 4.10.1.2(1)(C)之峰值傳導輸出功率量測方式者，至少須衰減 30 dB。此外，落於第 3.5 節禁用頻段之輻射發射，應符合第 3.6 節之規定。

依據 NCC 低功率射頻器材技術規範第 3.5 節之規定,禁用頻段如下：

頻率(MHz)	頻率(MHz)	頻率(MHz)	頻率(MHz)
0.090～0.110	108.00～138.00	1660.0～1785.0	8025.0～8500.0
0.490～0.510	149.90～150.05	1805.0～1888.0	9000.0～9200.0
2.172～2.198	156.70～156.90	1885.0～1900.0	9300.0～9500.0
3.013～3.033	162.01～167.17	1905.0～1985.0	10600～12700
4.115～4.198	167.72～173.20	2010.0～2025.0	13250～13400
5.670～5.690	240.00～285.00	2110.0～2170.0	14470～14500
6.200～6.300	322.00～335.40	2200.0～2300.0	15350～16200
8.230～8.400	399.90～410.00	2310.0～2390.0	17700～21400
12.265～12.600	485.00～510.00	2483.5～2900.0	22010～23120
13.340～13.430	608.00～614.00	3260.0～3267.0	23600～24000
14.965～15.020	703.00～748.00	3332.0～3339.0	31200～31800
16.700～16.755	758.00～803.00	3345.8～3358.0	36430～36500
19.965～20.020	825.00～915.00	3500.0～4400.0	38600 以上
25.500～25.700	930.00～1240.0	4500.0～5250 MHz.0	
37.475～38.275	1300.0～1427.0	5350.0～5460.0	
73.500～75.400	1435.0～1626.5	7250.0～7750.0	

依據 NCC 低功率射頻器材技術規範第 3.6 節之規定,除本規範各章節另有放寬規定者外，其電場強度不得超過下表之限值，且其不必要之發射皆不得大於主波發射強度。

頻　率(MHz)	電場強度(μV/m)	測距(m)
0.009 - 0.490(含)	2,400/頻率(千赫)	300
0.490 (不含) – 1.705 (含)	24,000/頻率(千赫)	30
1.705(不含) – 30 (不含)	30	30
30 (含) – 88 (含)	100	3
88 (不含)- 216 (含)	150	3
216 (不含)- 960 (含)	200	3
960 (不含)以上	500	3

測試方法 ：

測試場地為開放測試場,將待測物置於 0.8 米高的非金屬桌面，使其在工作狀態，接收天線置於 3 米外相同的高度。待測物分別要垂直或水平放置，而且桌面要 360 度旋轉，另外接收天線也要從 1.0 米至 4.0 米升降變化，以找出最大的輻射電場強度，接收天線置於水平、垂直極向各執行測試一次。


場強度之計算

場強之計算公式為：結果值 = 讀值 + 校正因子


其中校正因子為： 天線因子+ 饋線損失 + 濾波器損失（若有使用） - 放大器增益（若有使用）

測試架構圖 ：

量測頻率低於 1 GHz 以下之測試配置

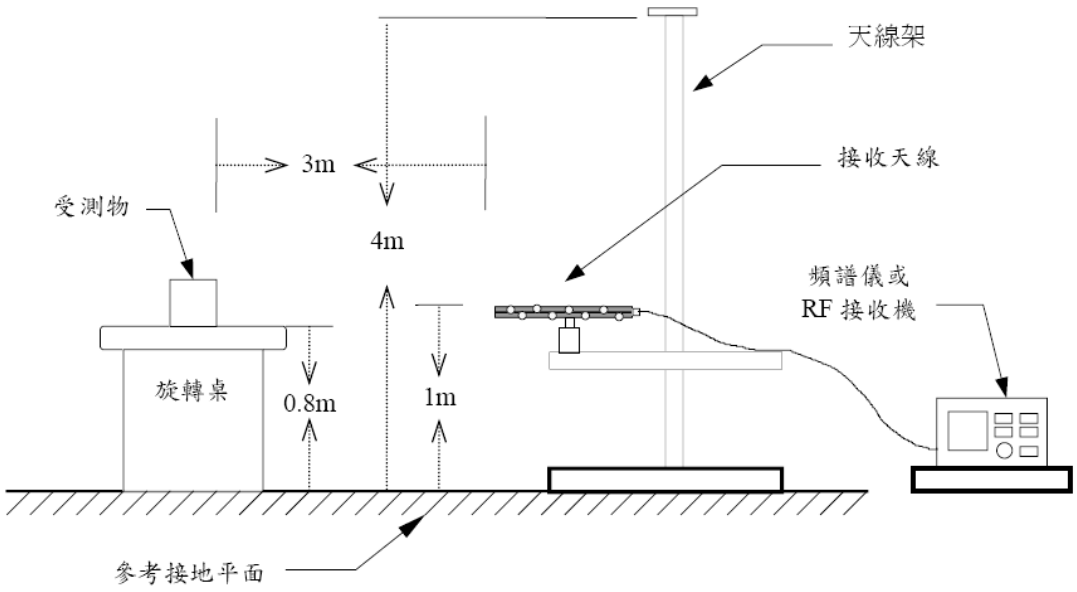

量測頻率高於 1 GHz 以上之測試配置

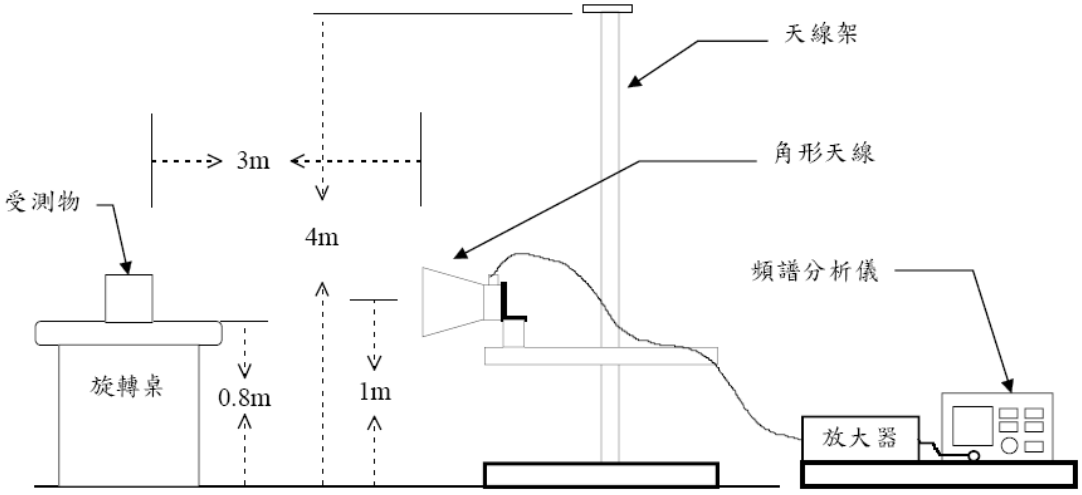


4.2.2 峰值傳導輸出功率之量測

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之 4.10.1.2(1)(C)節之要求，操作於 2400-2483.5 兆赫(MHz)數位調變技術系統：1 瓦(W)(含)以下

測試架構圖 ：

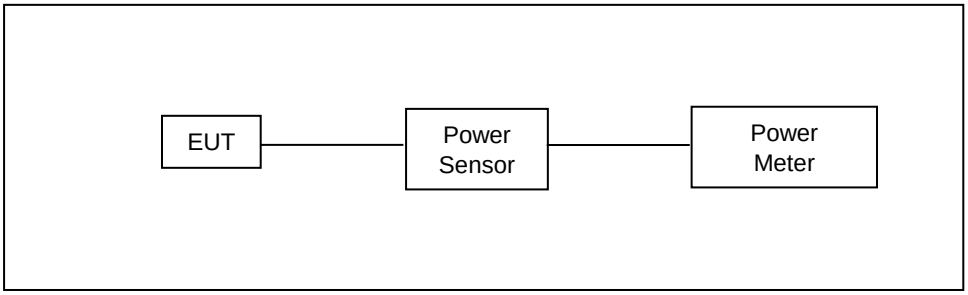

4.2.3 天線規格之要求

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之 4.10.1.3(3)節之要求，除 4.10.1.3(1)及 4.10.1.3(2)外，使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率限制值。

依據 NCC 低功率射頻器材技術規範(LP0002)之 4.10.1.4 節之要求，天線之規格不受第 3.2 節規定之限制。


判定結果: 符合。

4.2.4 非必要頻帶之量測

合格標準:

發射限制：使用頻帶範圍外之任意 100 千赫 (kHz)內，發射器所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之 100 千赫 (kHz)內的射頻功率，須衰減 20 分貝(dB)，以射頻傳導或輻射方式測量。

測試架構圖 ：

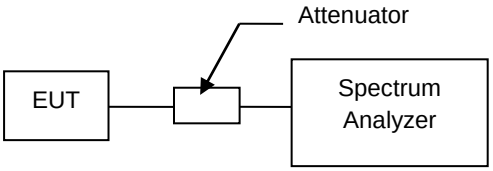

附註 1: 於使用頻帶範圍之任意 100 千赫 (kHz)內，發射器所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之 100 千赫 (kHz)內的射頻功率，衰減 20 分貝(dB)以上，符合規定。


附註 2: 測試結果頻帶外之輻射雜訊皆小於主頻 TX 20 dB。

4.2.5 6 dB頻寬之要求

合格標準:

依據 NCC 低功率射頻器材技術規範 4.10.1.6(2)(A)節之要求，對使用數位調變技術(Digital Modulation Techniques)系統而言， 6 dB 頻寬至少應有 500 千赫(kHz)。

測試架構圖 ：

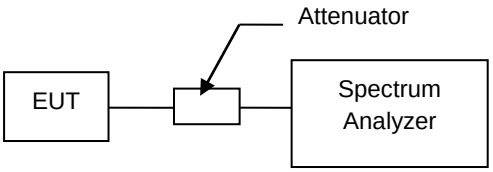


4.2.6 峰值發射電功率密度之要求

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之 4.10.1.6(2)(B)節之要求，數位調變技術(Digital Modulation Techniques)系統之功率密度,再使用頻率範圍之任意 3kHz 頻寬內,由發射機傳導至天線之峰值發射電功率密度在任意期間內,皆不得大於 8 dBm(複合系統時, 關閉跳頻作業狀態檢驗)。

測試架構圖 ：

測試場地測試配置如圖所示。

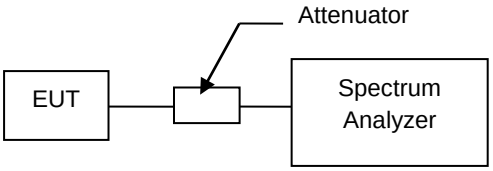

4.2.7 電波暴露量之評估

合格標準:

若受測物於正常操作模式下，其發射機距離人體 20 公分以上者，可測試最大暴露允許值(Maximum Permissible Exposure，MPE)以證明其符合電波暴露量之要求。限制值如下：

6.20.2.1 職業性/可控制之暴露

頻率範圍 (MHz)	電場強度 (V/m)	磁場強度 (A/m)	功率密度 (mW/cm^2)	平均時間 (minutes)
0.3～3.0	614	1.63	*100	6
3～30	1842/f	4.89/f	$*900/f^2$	6
30～300	61.4	0.163	1.0	6
300～1,500	-----	-----	f/300	6
1,500～100,000	-----	-----	5.0	6

註 1：標記*表平面波等效功率密度。
註 2：f 表測試頻率，單位：MHz。

6.20.2.2 一般人/不可控制之暴露

頻率範圍 (MHz)	電場強度 (V/m)	磁場強度 (A/m)	功率密度 (mW/cm^2)	平均時間 (minutes)
0.3～1.34	614	1.63	*100	30
1.34～30	824/F	2.19/F	$*180/F^2$	30
30～300	27.5	0.073	0.2	30
300～1,500	-----	-----	F/1500	30
1,500～100,000	-----	-----	1.0	30

註 1：標記*表平面波等效功率密度。
註 2：f 表測試頻率，單位：MHz。

4.3 5 GHz U-NII 檢驗項目

4.3.1 場強輻射與非必要頻帶之量測

場強輻射合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之落於第 3.5 節禁用頻段之輻射發射，應符合第 3.6 節之規定。

依據 NCC 低功率射頻器材技術規範第 3.5 節之規定,禁用頻段如下：

頻率(MHz)	頻率(MHz)	頻率(MHz)	頻率(MHz)
0.090～0.110	108.00～138.00	1660.0～1770.0	8025.0～8500.0
0.490～0.510	149.90～150.05	1805.0～1865.0	9000.0～9200.0
2.172～2.198	156.70～156.90	1885.0～1900.0	9300.0～9500.0
3.013～3.033	162.01～167.17	1905.0～1985.0	10600～12700
4.115～4.198	167.72～173.20	2015.0～2025.0	13250～13400
5.670～5.690	240.00～285.00	2125.0～2165.0	14470～14500
6.200～6.300	322.00～335.40	2200.0～2300.0	15350～16200
8.230～8.400	399.90～410.00	2310.0～2390.0	17700～21400
12.265～12.600	485.00～510.00	2483.5～2900.0	22010～23120
13.340～13.430	608.00～614.00	3260.0～3267.0	23600～24000
14.965～15.020	703.00～748.00	3332.0～3339.0	31200～31800
16.700～16.755	758.00～803.00	3345.8～3358.0	36430～36500
19.965～20.020	825.00～915.00	3500.0～4400.0	38600 以上
25.500～25.700	930.00～1240.0	4500.0～5250 MHz.0	
37.475～38.275	1300.0～1427.0	5350.0～5460.0	
73.500～75.400	1435.0～1626.5	7250.0～7750.0	

依據 NCC 低功率射頻器材技術規範第 3.6 節之規定,除本規範各章節另有放寬規定者外，其電場強度不得超過下表之限值，且其不必要之發射皆不得大於主波發射強度。

頻　率(MHz)	電場強度(μV/m)	測距(m)
0.009 - 0.490(含)	2,400/頻率(千赫)	300
0.490 (不含) – 1.705 (含)	24,000/頻率(千赫)	30
1.705(不含) – 30 (不含)	30	30
30 (含) – 88 (含)	100	3
88 (不含)- 216 (含)	150	3
216 (不含)- 960 (含)	200	3
960 (不含)以上	500	3

非必要頻帶合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之 5.7.4 節之要:

不必要發射之限值：在操作頻帶外的峰值發射應衰減至符合下列限值：

1. 在 5.15 GHz～5.35 GHz 及 5.470 GHz～5.725 GHz 頻帶操作的發射器：帶外發射之有效等向輻射功率(EIRP)≦ -27 dBm/MHz。
2. 在 5.725 GHz～5.850 GHz 的頻帶操作之發射器：所有頻帶邊緣的頻率發射, 其有效等向輻射功率(EIRP)≦27 dBm/MHz；所有頻帶邊緣向外 5 MHz 內頻率之發射從有效等向輻射功率(EIRP)≦27 dBm/MHz 線性減少至有效等向輻射功率(EIRP)≦15.6 dBm/MHz；所有頻帶邊緣向外 25 MHz 內頻率之發射從有效等向輻射功率(EIRP)≦15.6 dBm/MHz 線性減少至有效等向輻射功率(EIRP)≦10 dBm/MHz；所有頻帶邊緣向外 75 MHz 內頻率之發射從有效等向輻射功率(EIRP)≦10 dBm/MHz 線性減少至有效等向輻射功率(EIRP)≦-27 dBm/MHz;所有頻帶邊緣向外 75 MHz 頻率之發射的有效等向輻射功率(EIRP)≦-27 dBm/MHz。
3. 量測不必要發射時，應使用之最低解析頻寬為 1 MHz。必要時，於頻帶邊緣附近可使用小於 1 MHz 之解析頻寬，並以補償方式計算其總值。
4. 當測量不必要發射之限值時，應將待測物的載波頻率調整到儘可能接近設備設計所允許的上、下頻帶邊緣。
5. 在 1 GHz 以下的不必要之發射，應符合第 3.6 條之規定，任何使用市電為供應電源之設備亦須符合 3.3 條之電源線傳導限值。
6. 不必要發射頻率屬第 3.5 條規定頻帶者，應符合第 3.6 條之規定。

測試方法 ：

測試場地為開放測試場,將待測物置於 0.8 米高的非金屬桌面，使其在工作狀態，接收天線置於 3 米外相同的高度。待測物分別要垂直或水平放置，而且桌面要 360 度旋轉，另外接收天線也要從 1.0 米至 4.0 米升降變化，以找出最大的輻射電場強度，接收天線置於水平、垂直極向各執行測試一次。


場強度之計算

場強之計算公式為：結果值 = 讀值 + 校正因子


其中校正因子為： 天線因子+ 饋線損失 + 濾波器損失（若有使用） - 放大器增益（若有使用）

測試架構圖 ：

量測頻率低於 1 GHz 以下之測試配置

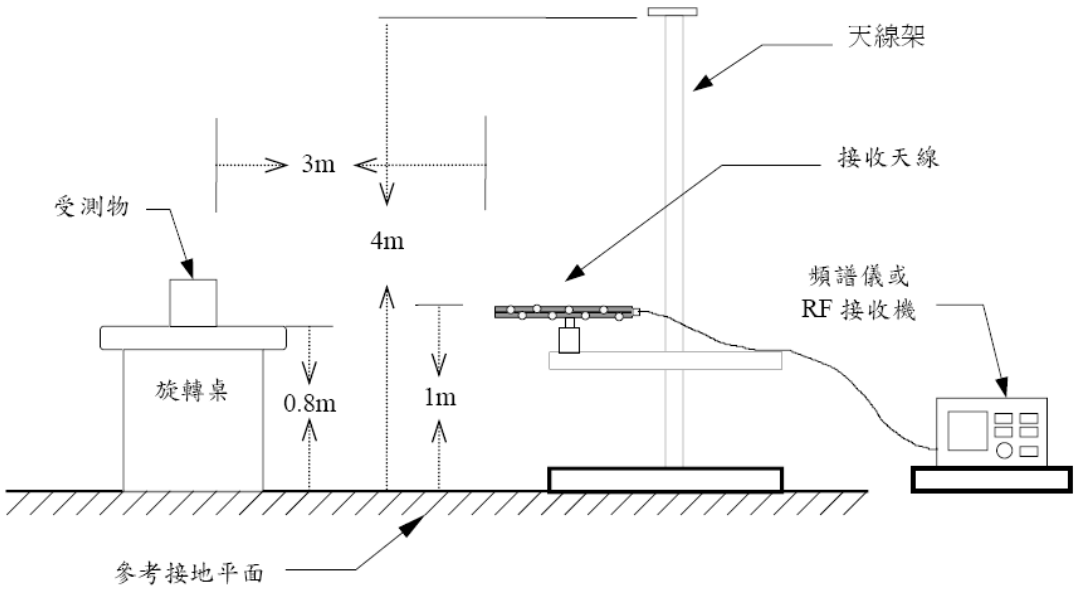

量測頻率高於 1 GHz 以上之測試配置

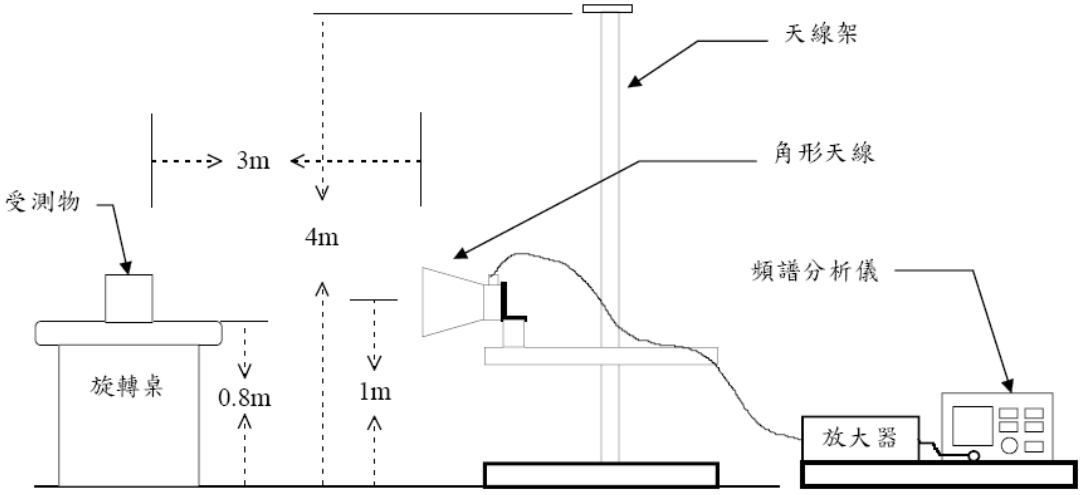

4.3.2 最大傳導輸出功率之量測

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之 5.7.3 節之要求:

1. 5.15-5.25 GHz 頻帶

(1) 供戶外操作使用:
- 最大傳導輸出功率不能超過 1 W。
- 在任何 1MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
- 在水平面仰角超過 30 度時，其最大 EIRP 不能超過 21dBm。

(2) 供室內操作使用:
- 最大傳導輸出功率不能超過 1 W。
- 在任何 1MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

(3) 供固定式點對點操作使用:
- 最大傳導輸出功率不能超過 1 W。
- 在任何 1MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 23dBi 方向增益之指向性天線時，應依超過 23dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
- 固定式點對點操作，不包括點對多點系統、全方向性應用及多台共站發射機傳送相同資訊。

(4) 供行動或可攜式裝置操作使用:
- 最大傳導輸出功率不能超過 250 mW。
- 在任何 1MHz 頻帶中最大功率頻譜密度不能超過 11dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

2. 5.25-5.35 GHz 與 5.470-5.725 GHz 頻帶

(1) 最大傳導輸出功率不能超過 250 mW 或 11 dBm+10 log B (B 是 26 dB 發射頻寬，單位 MHz)之較小者。

(2) 最大功率頻譜密度在任何 1 MHz 頻帶中不能超過 11 dBm。

(3) 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

3. 5.725-5.850 GHz 頻帶

(1) 最大傳導輸出功率不能超過 1 W。


(2) 在任何 500 kHz 頻帶中最大功率頻譜密度不能超過 30 dBm。

(3) 供固定式點對點操作時，使用方向增益超過 6 dBi 之發射天線，可不需對應減少發射器之傳導輸出功率限制值。

(4) 除(3)外，使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

4. 最大傳導輸出功率必須使用依據均方根等效電壓校準之儀器量測於任何連續傳輸之時段，量測結果須依儀器限制(如偵測器反應時間、相較於發射頻寬有限之解析頻寬能力，靈敏度等)調整得出正確之峰值量測，以符合本段落所提之發射定義。

測試架構圖 ：

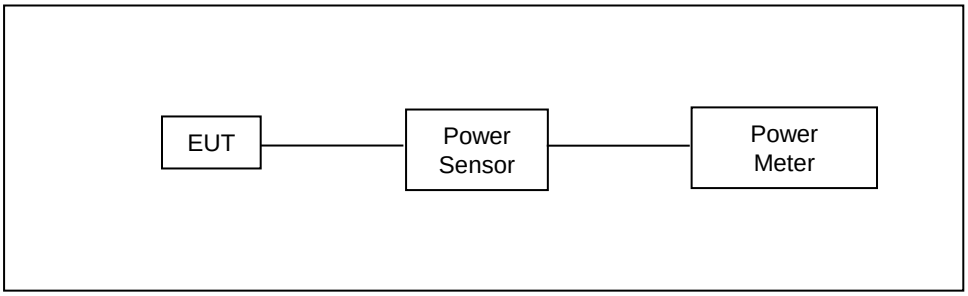

4.3.3 最大傳導功率頻譜密度之要求

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之 5.7.3 節之要求:

1. 5.15-5.25 GHz 頻帶

(1) 供戶外操作使用:
- 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
- 在水平面仰角超過 30 度時，其最大 EIRP 不能超過 21 dBm。

(2) 供室內操作使用:
- 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

(3) 供固定式點對點操作使用:
- 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 23 dBi 方向增益之指向性天線時，應依超過 23 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
- 固定式點對點操作，不包括點對多點系統、全方向性應用及多台共站發射機傳送相同資訊。

(4) 供行動或可攜式裝置操作使用:
- 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 11 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

2. 5.25-5.35 GHz 與 5.470-5.725 GHz 頻帶

(1) 最大功率頻譜密度在任何 1 MHz 頻帶中不能超過 11 dBm。

(2) 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

3. 5.725-5.850 GHz 頻帶

(1) 在任何 500 kHz 頻帶中最大功率頻譜密度不能超過 30 dBm。


(2) 供固定式點對點操作時，使用方向增益超過 6 dBi 之發射天線，可不需對應減少發射器之傳導輸出功率限制值。

(3) 除(2)外，使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

4. 最大功率頻譜密度量測規定：

(1) 應將量測儀器直接連接待測物，以傳導方式執行。
(2) 5.15 GHz～5.25 GHz、5.25 GHz～5.35 GHz 及 5.47 GHz～5.725 GHz 頻帶，量測儀器之頻寬應設定為 1 MHz 頻寬或或待測物之 26 dB 發射頻寬，兩者取較小者。
(3) 5.725 GHz～5.850 GHz 頻帶，量測器之頻寬應設定為 500 kHz 或待測物之 26 dB 發射頻寬，兩者取較小者。
(4) 解析頻寬小於(2)或(3)時，應以補償方式計算總功率頻譜密度。

測試架構圖 ：

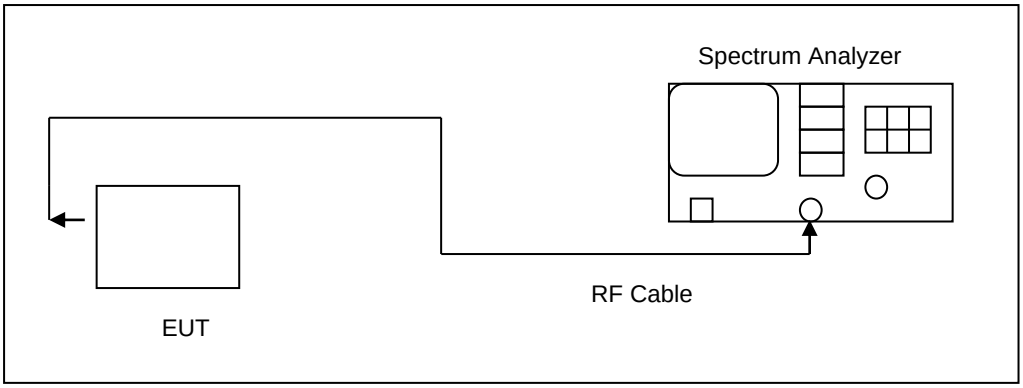


4.3.4 26 dB頻寬之要求

合格標準:

N/A

測試架構圖 ：

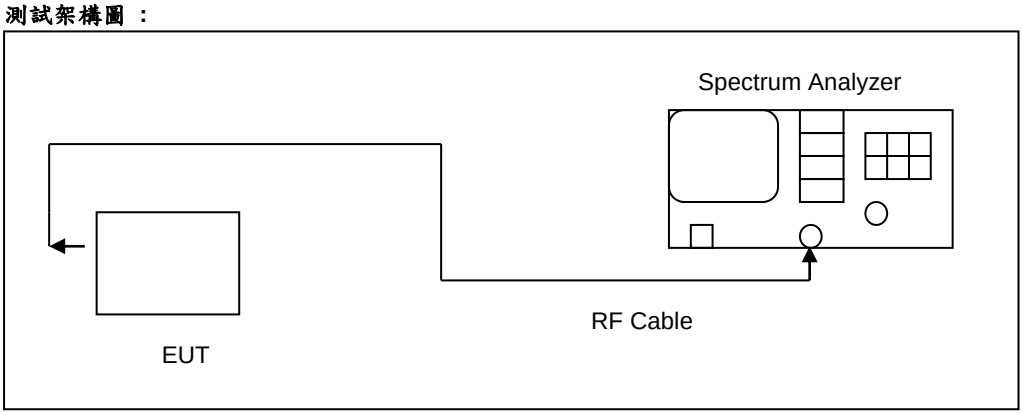


4.3.5 6 dB頻寬之要求

合格標準:

在 5.725 GHz～5.850 GHz 頻帶操作之設備，其 6 dB 頻寬至少應有 500 kHz。

測試架構圖 ：

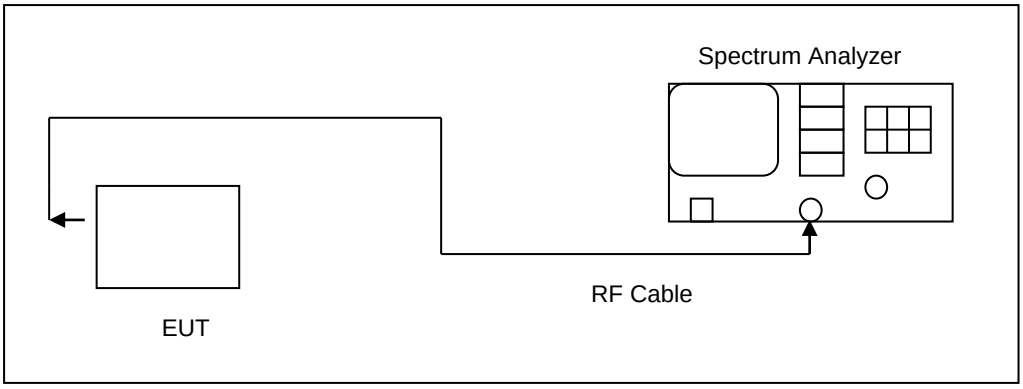


4.3.6 發射功率控制(TPC)之量測

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)5.7.7.1 節之要求, 發射功率控制(TPC)操作於 5.25 GHz～5.35 GHz 與 5.470 GHz～5.725 GHz 頻帶的設備，應具備發射功率控制功能。設備必須至少具有 6 dB 低於平均 EIRP 值 30 dBm 的能力。EIRP 值低於 500 mW 之系統不須具備 TPC 功能。

測試架構圖 ：

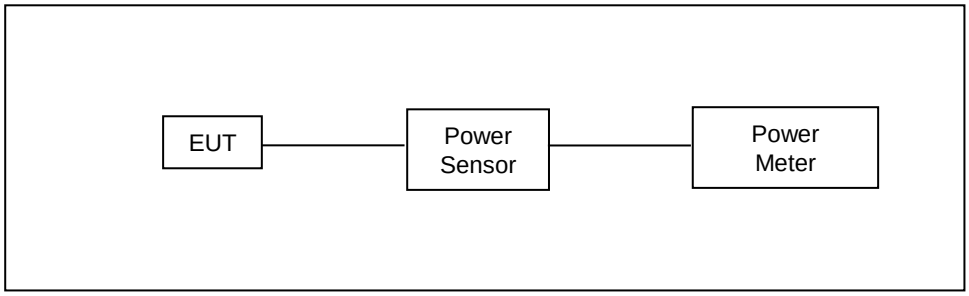

4.3.7 動態頻率選擇(DFS)之量測

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)5.7.7.2 節之要求, 操作於 5.25 GHz～5.35 GHz 與 5.470 GHz～5.725 GHz 頻帶之設備應具備動態頻率選擇雷達偵測功能並啟動之，以完整偵測使用頻帶內之雷達訊號，避免與雷達系統同頻道操作。相關規定如下：


最低動態頻率選擇的偵測門檻

- 最大 EIRP 為 200 mW 至 1 W 之設備，其最低動態頻率選擇的偵測門檻值為-64 dBm。
- 最大 EIRP 低於 200 mW，且功率頻譜密度小於 10 dBm/MHz 之設備，其最低動態頻率選擇的偵測門檻值為-62 dBm。
- 最大 EIRP 低於 200 mW，且功率頻譜密度大於或等於 10 dBm/MHz 之設備，其最低動態頻率選擇的偵測門檻值為-64dBm。
- 此偵測門檻值為 1 微秒內之平均接收功率，並以 0 dBi 天線為參考基準。頻道初始設定得由系統隨機選取或使用者手動選取。

操作模式：動態頻率選擇之規定適用於以下之操作模式：

- 頻道可用性檢查時間之規定，適用於主控運作模式。
- 頻道移動時間之規定，適用於主控及受控運作模式。

測試架構圖 ：

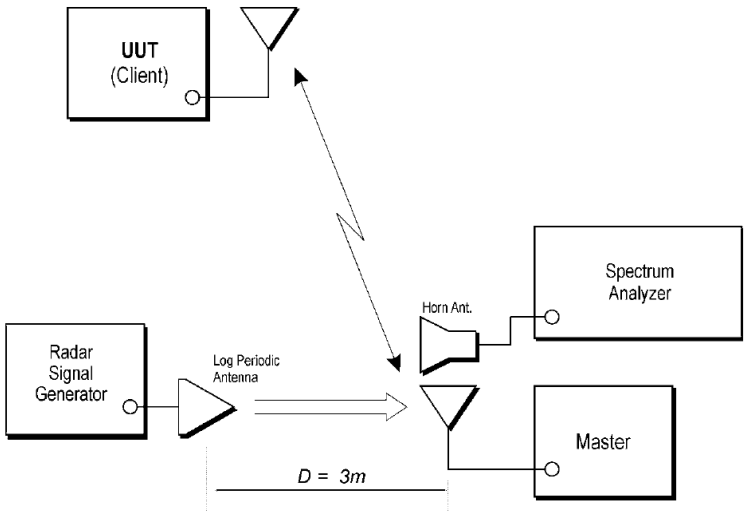


4.3.8 頻道可用性檢查時間之量測

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之 5.7.7.2(3)節之要求, 設備必須檢查其可在某一頻道上起始傳送之前是否有雷達系統已經操作在該頻道上，以及何時其必須移動到另一新的頻道，在 60 秒內若沒有偵測到功率位準大過上述之干擾門檻值的雷達信號時，設備才可開始使用該頻道。

測試架構圖 ：

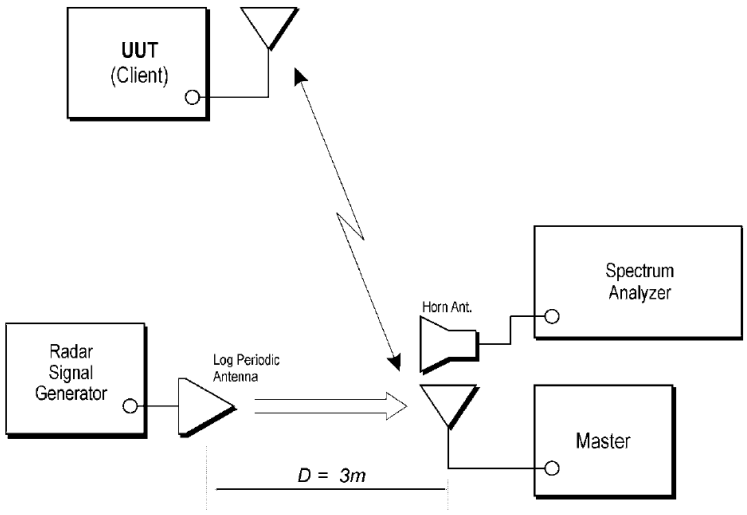


4.3.9 頻道移動時間之量測

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之 5.7.7.2(4)節之要求, 在偵測到雷達的存在後，所有在該操作頻道上的所有傳輸須在 10 秒內停止，在偵測到雷達信號後，該期間內的傳輸應維持最多 200 毫秒的正常通訊。另外，間歇性的管理與控制信號可在剩餘的時間中傳送，以便撤離該操作頻道。

測試架構圖 ：

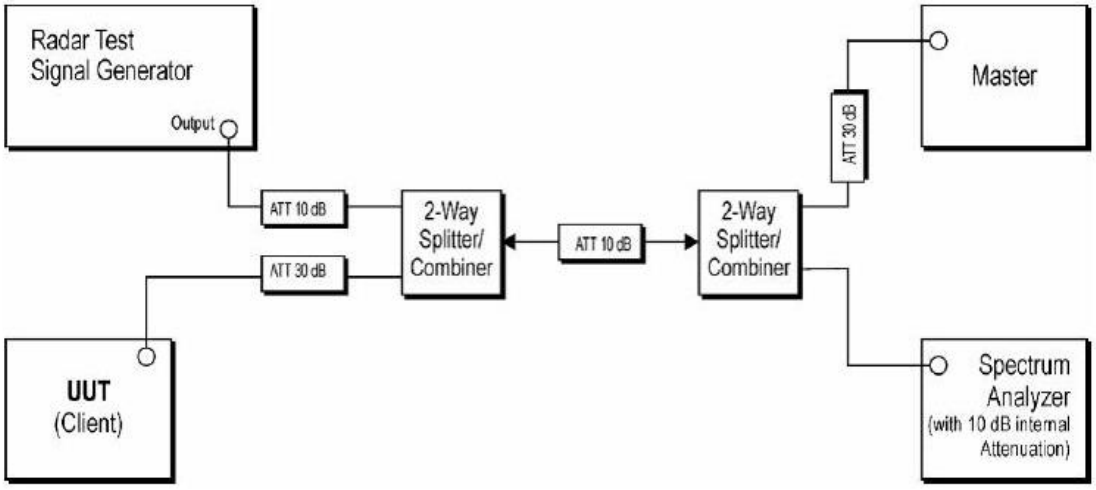


Product		Manufacturer	Model No.	ID
1.	Wiress-AX6000 同步雙頻無線路由器	ASUS	RT-AX88U	NCC ID : CCAF18LP1530T1

4.3.10 不可佔用時間之量測

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之 5.7.7.2(5)節之要求，某一頻道已被頻道可用性檢查或”服務中”監視顯示含有雷達系統，至少須有 30 分鐘的不可佔用期間。不可佔用期間起始於偵測到雷達系統的當時。

測試架構圖 :

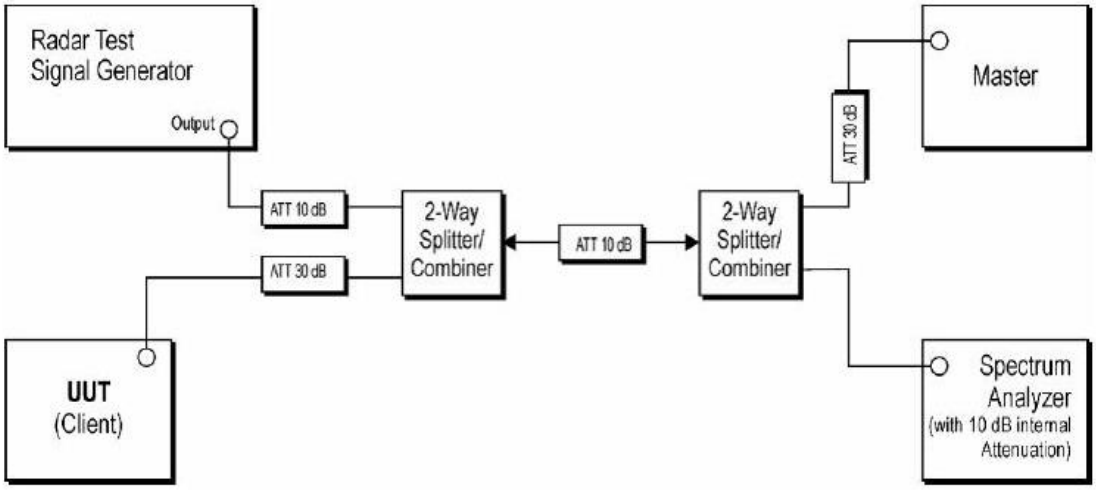

4.3.11 天線規格之要求

合格標準:

據 NCC 低功率射頻器材技術規範(LP0002)之 5.7.8 節之要求，天線之規格不受第 3.2 節規定之限制。

判定結果: 符合。

4.3.12 電波暴露量之評估

合格標準:

若受測物於正常操作模式下，其發射機距離人體 20 公分以上者，可測試最大暴露允許值(Maximum Permissible Exposure，MPE)以證明其符合電波暴露量之要求。限制值如下：

6.20.2.1 職業性/可控制之暴露

頻率範圍 (MHz)	電場強度 (V/m)	磁場強度 (A/m)	功率密度 (mW/cm^2)	平均時間 (minutes)
0.3～3.0	614	1.63	*100	6
3～30	1842/f	4.89/f	$*900/f^2$	6
30～300	61.4	0.163	1.0	6
300～1,500	-----	-----	f/300	6
1,500～100,000	-----	-----	5.0	6

註 1：標記*表平面波等效功率密度。
註 2：f 表測試頻率，單位：MHz。

6.20.2.2 一般人/不可控制之暴露


頻率範圍 (MHz)	電場強度 (V/m)	磁場強度 (A/m)	功率密度 (mW/cm^2)	平均時間 (minutes)
0.3～1.34	614	1.63	*100	30
1.34～30	824/F	2.19/F	$*180/F^2$	30
30～300	27.5	0.073	0.2	30
300～1,500	-----	-----	F/1500	30
1,500～100,000	-----	-----	1.0	30

註 1：標記*表平面波等效功率密度。
註 2：f 表測試頻率，單位：MHz。

5. Test Results

5.1 Conducted Emission


Standard:	LP0002	Line:	L1
Test item:	Conducted Emission	Power:	AC 110 V/60 Hz
Mode:	Mode 1		
Description:			

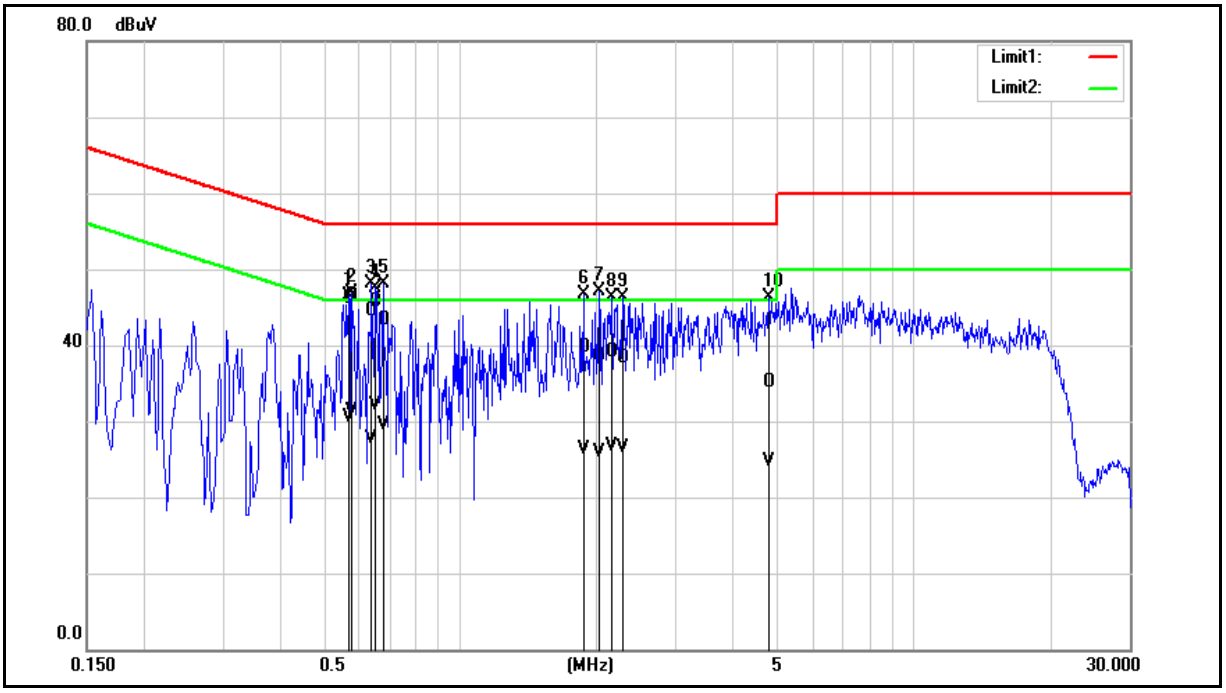

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.5700	36.33	20.85	9.74	46.07	30.59	56.00	46.00	-9.93	-15.41	Pass
2	0.5780	36.74	21.52	9.74	46.48	31.26	56.00	46.00	-9.52	-14.74	Pass
3	0.6380	34.66	17.97	9.75	44.41	27.72	56.00	46.00	-11.59	-18.28	Pass
4	0.6540	35.86	22.40	9.75	45.61	32.15	56.00	46.00	-10.39	-13.85	Pass
5	0.6780	33.52	19.69	9.75	43.27	29.44	56.00	46.00	-12.73	-16.56	Pass
6	1.8700	29.99	16.55	9.80	39.79	26.35	56.00	46.00	-16.21	-19.65	Pass
7	2.0300	28.71	16.11	9.80	38.51	25.91	56.00	46.00	-17.49	-20.09	Pass
8	2.1620	29.37	16.87	9.80	39.17	26.67	56.00	46.00	-16.83	-19.33	Pass
9	2.2940	28.55	16.73	9.80	38.35	26.53	56.00	46.00	-17.65	-19.47	Pass
10	4.8220	25.19	14.91	9.87	35.06	24.78	56.00	46.00	-20.94	-21.22	Pass

註：1. 干擾值(dBuV) = 校正係數(dB) + 讀值(dBuV)。
2. 校正係數(dB) = 量測信號線損失(dB) + 電源阻抗模擬網路係數(dB)。

Standard:	LP0002	Line:	N
Test item:	Conducted Emission	Power:	AC 110 V/60 Hz
Mode:	Mode 1		
Description:			

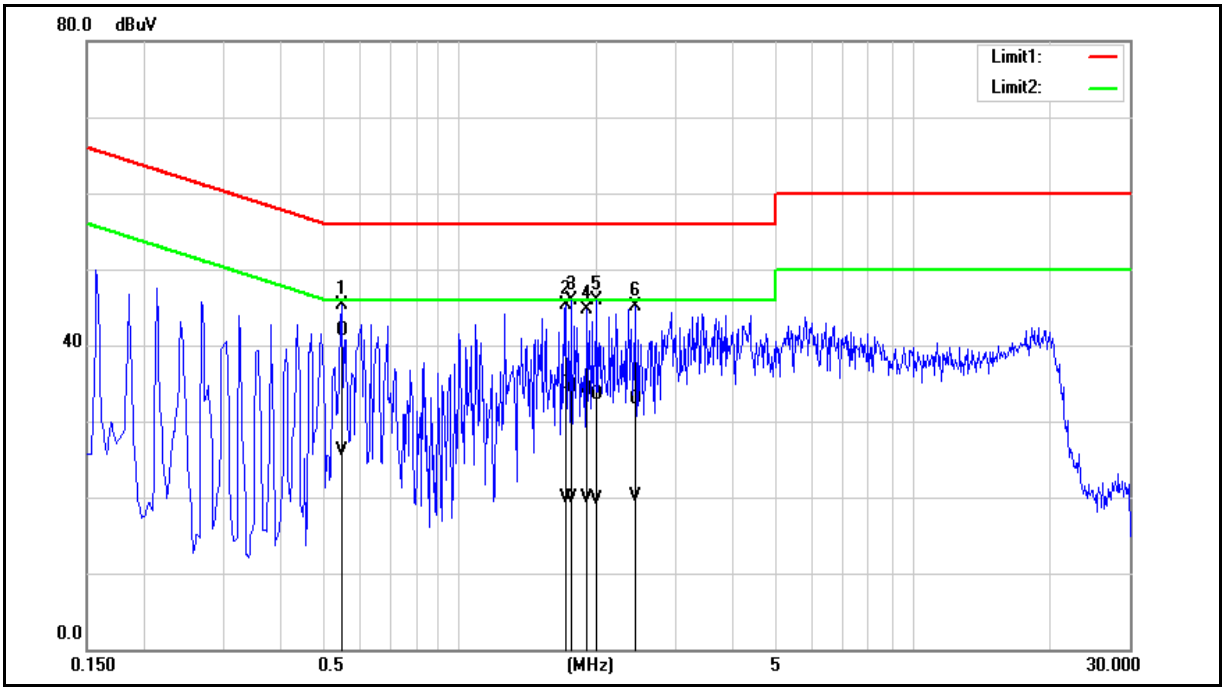


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.5500	32.26	16.45	9.73	41.99	26.18	56.00	46.00	-14.01	-19.82	Pass
2	1.7100	25.03	10.06	9.79	34.82	19.85	56.00	46.00	-21.18	-26.15	Pass
3	1.7620	24.75	10.08	9.79	34.54	19.87	56.00	46.00	-21.46	-26.13	Pass
4	1.9020	24.23	10.12	9.80	34.03	19.92	56.00	46.00	-21.97	-26.08	Pass
5	2.0060	23.76	9.88	9.80	33.56	19.68	56.00	46.00	-22.44	-26.32	Pass
6	2.4380	23.16	10.37	9.81	32.97	20.18	56.00	46.00	-23.03	-25.82	Pass

註：1. 干擾值(dBuV) = 校正係數(dB) + 讀值(dBuV)。
2. 校正係數(dB) = 量測信號線損失(dB) + 電源阻抗模擬網路係數(dB)。

5.2 Radiated Emission Measurement (2.4 GHz)

其它不必要之訊號 (1 GHz 以下)

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

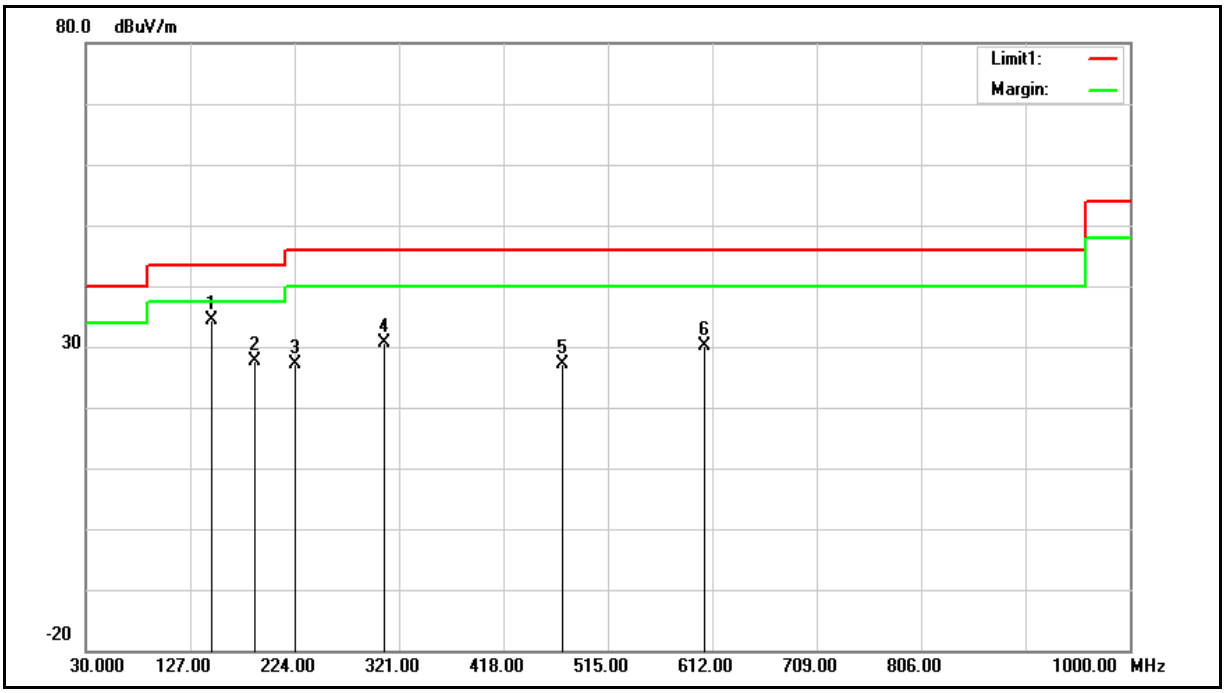


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	147.3700	41.05	-6.77	34.28	43.50	-9.22	QP
2	187.1400	35.93	-8.30	27.63	43.50	-15.87	QP
3	224.0000	35.46	-8.39	27.07	46.00	-18.93	QP
4	307.4200	36.32	-5.77	30.55	46.00	-15.45	QP
5	472.3200	29.43	-2.25	27.18	46.00	-18.82	QP
6	605.2100	29.17	1.01	30.18	46.00	-15.82	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

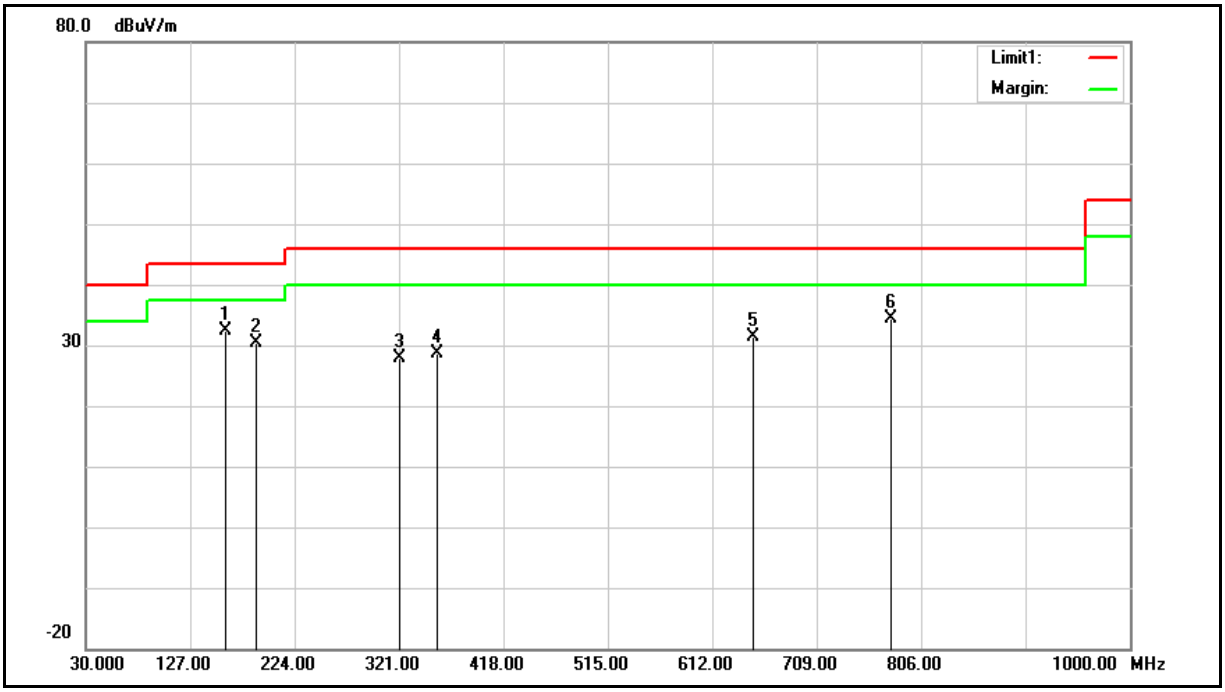

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	159.9800	38.78	-6.36	32.42	43.50	-11.08	QP
2	188.1100	38.78	-8.37	30.41	43.50	-13.09	QP
3	321.0000	33.33	-5.50	27.83	46.00	-18.17	QP
4	355.9200	33.40	-4.75	28.65	46.00	-17.35	QP
5	649.8300	29.73	1.57	31.30	46.00	-14.70	QP
6	777.8700	30.36	3.96	34.32	46.00	-11.68	QP


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

場強輻射量測 (1 GHz 以上)

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

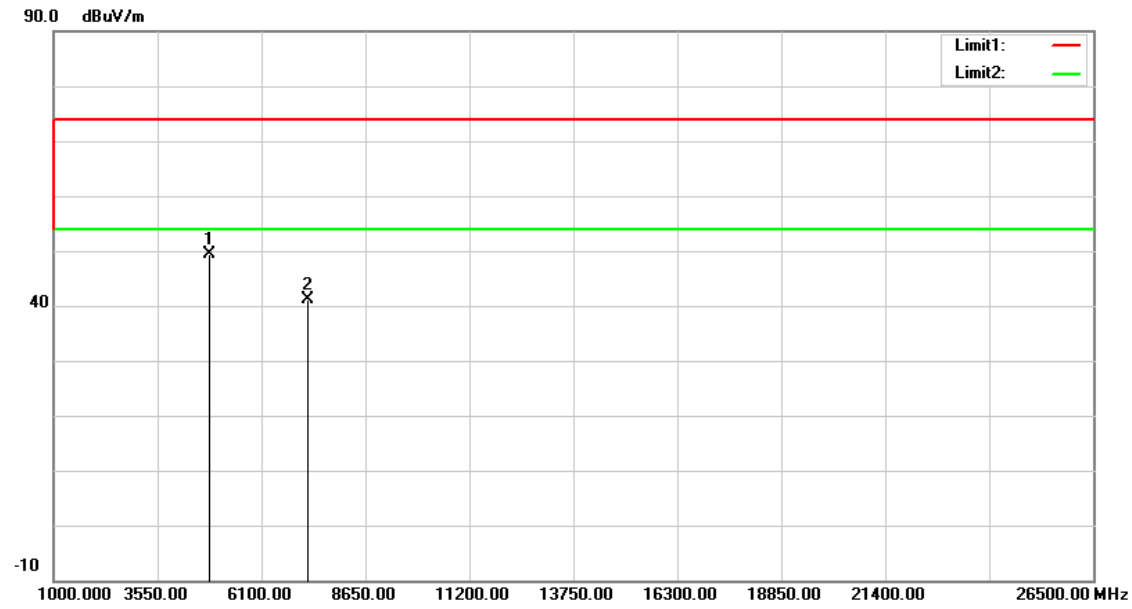


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	50.39	-0.98	49.41	74.00	-24.59	peak
2	7236.000	35.03	6.16	41.19	74.00	-32.81	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

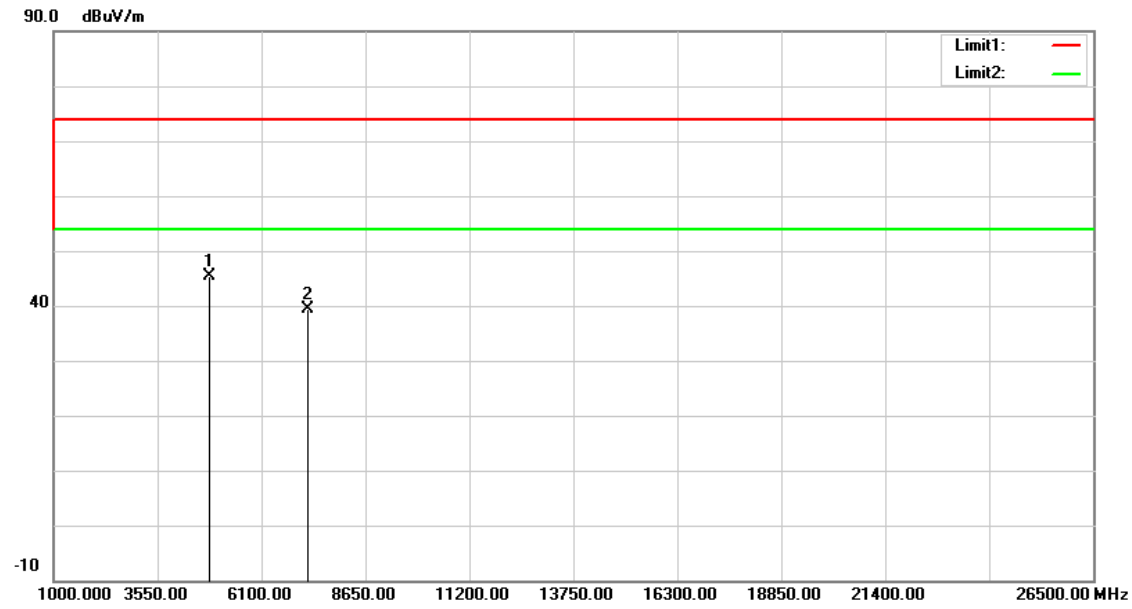


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	46.33	-0.98	45.35	74.00	-28.65	peak
2	7236.000	33.18	6.16	39.34	74.00	-34.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

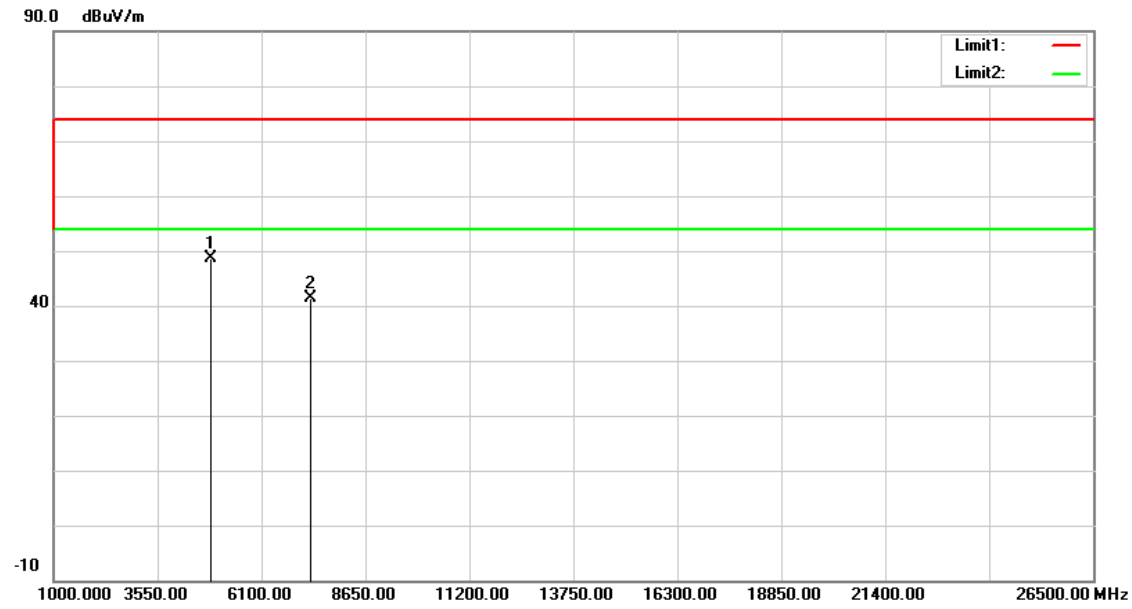


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	49.33	-0.80	48.53	74.00	-25.47	peak
2	7311.000	34.86	6.46	41.32	74.00	-32.68	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

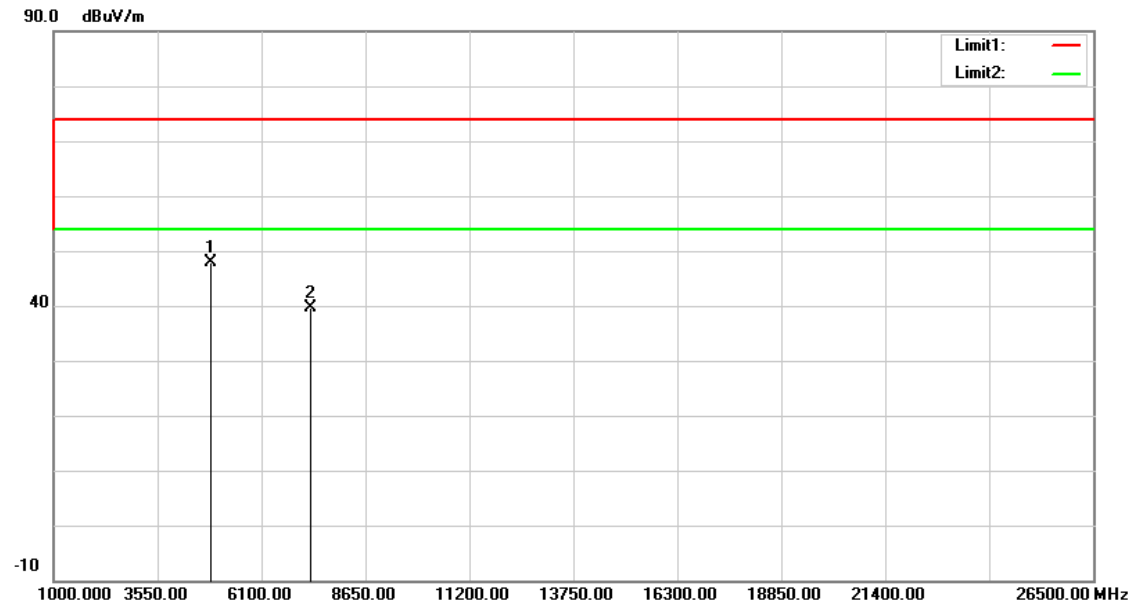


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	48.71	-0.80	47.91	74.00	-26.09	peak
2	7311.000	33.11	6.46	39.57	74.00	-34.43	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

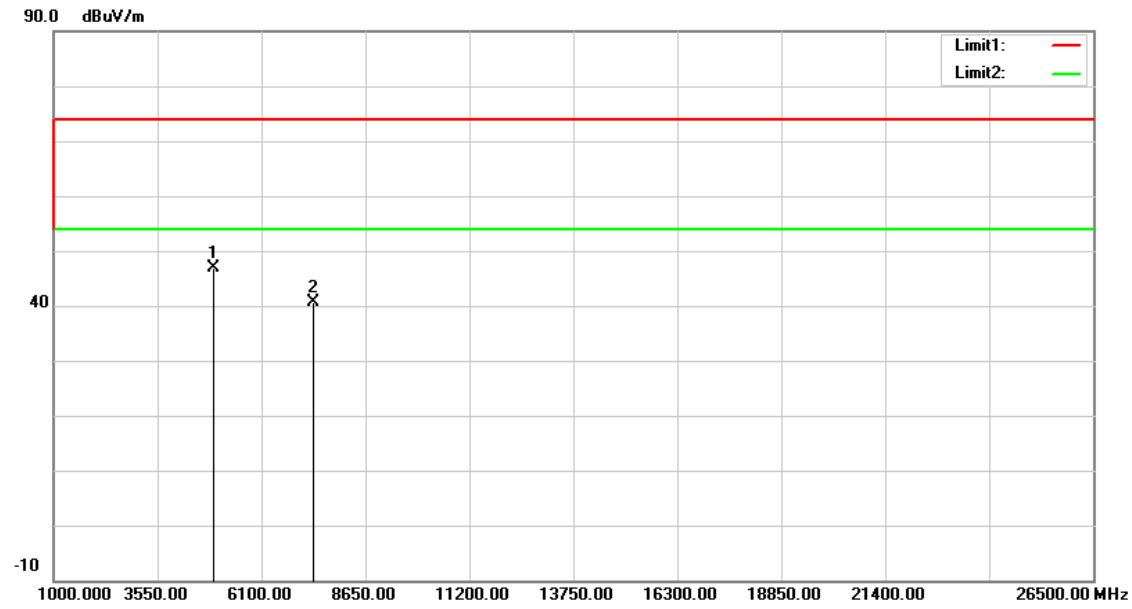


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	47.45	-0.63	46.82	74.00	-27.18	peak
2	7386.000	33.92	6.75	40.67	74.00	-33.33	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

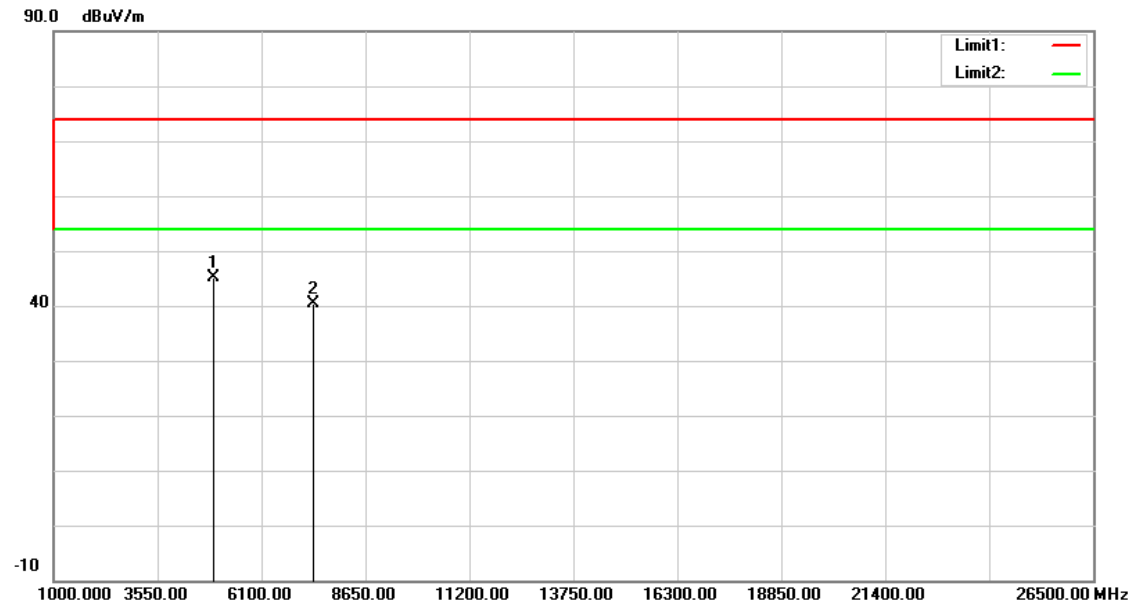


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	45.83	-0.63	45.20	74.00	-28.80	peak
2	7386.000	33.69	6.75	40.44	74.00	-33.56	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

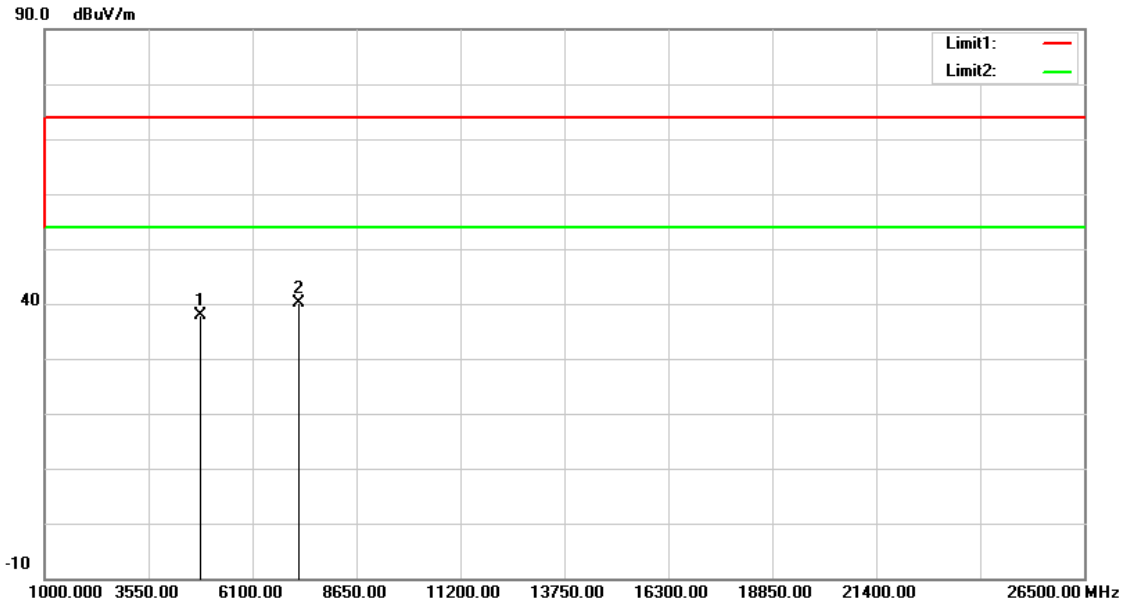


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	38.86	-0.98	37.88	74.00	-36.12	peak
2	7236.000	33.90	6.16	40.06	74.00	-33.94	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

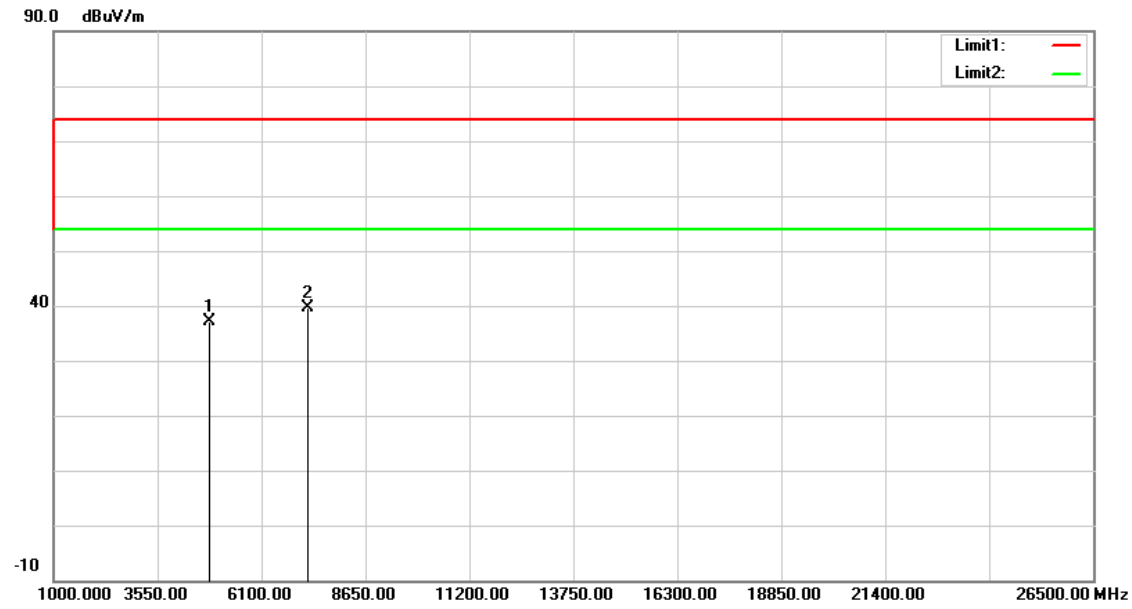


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	38.23	-0.98	37.25	74.00	-36.75	peak
2	7236.000	33.55	6.16	39.71	74.00	-34.29	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

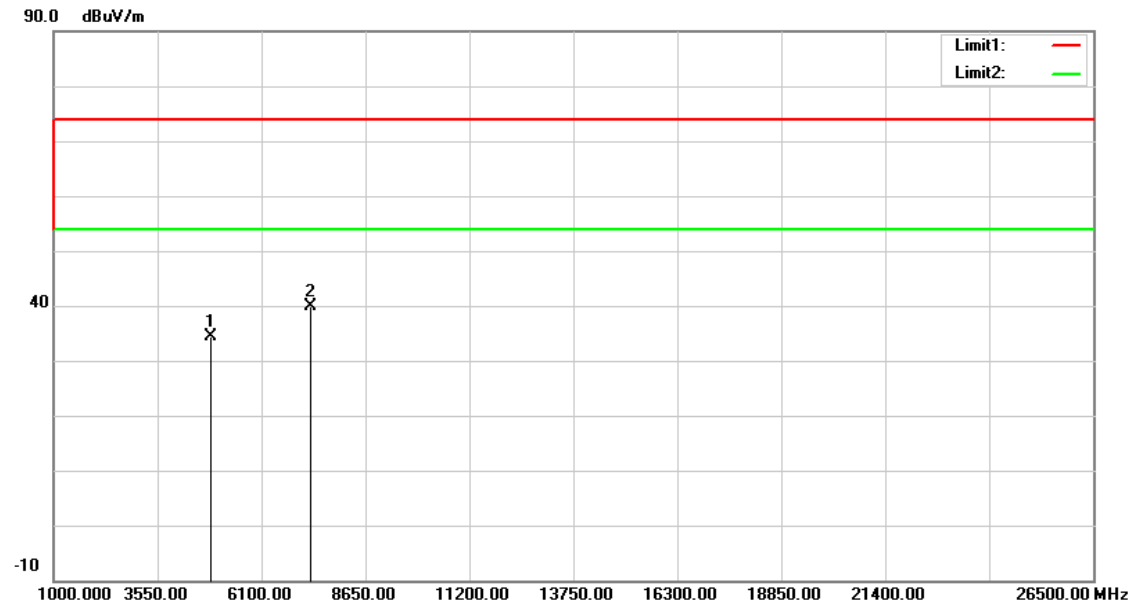


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	35.07	-0.80	34.27	74.00	-39.73	peak
2	7311.000	33.31	6.46	39.77	74.00	-34.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

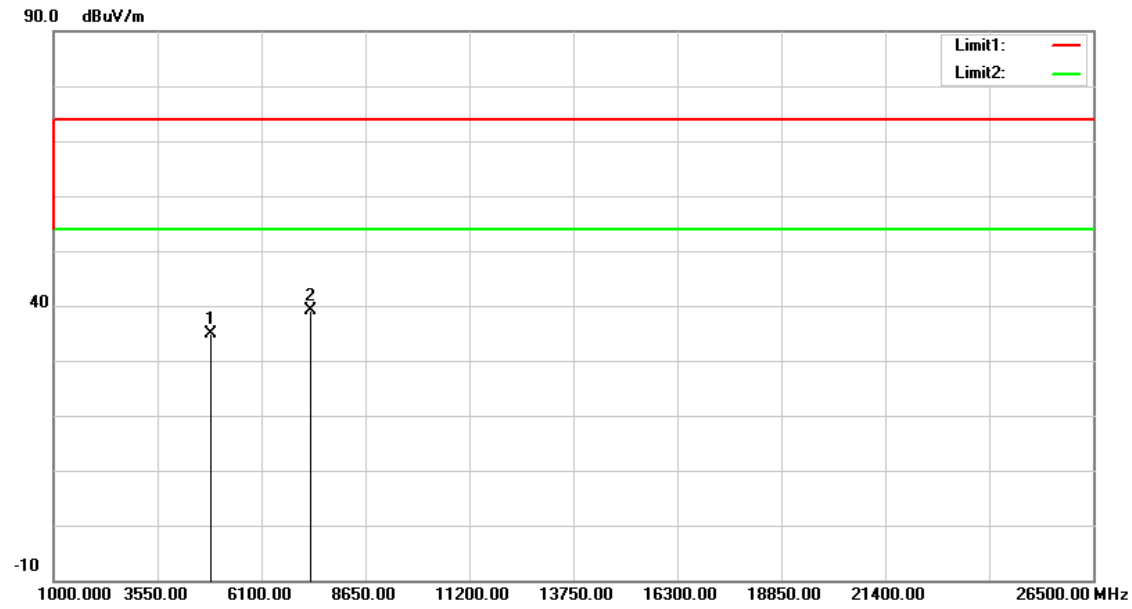


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	35.72	-0.80	34.92	74.00	-39.08	peak
2	7311.000	32.60	6.46	39.06	74.00	-34.94	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

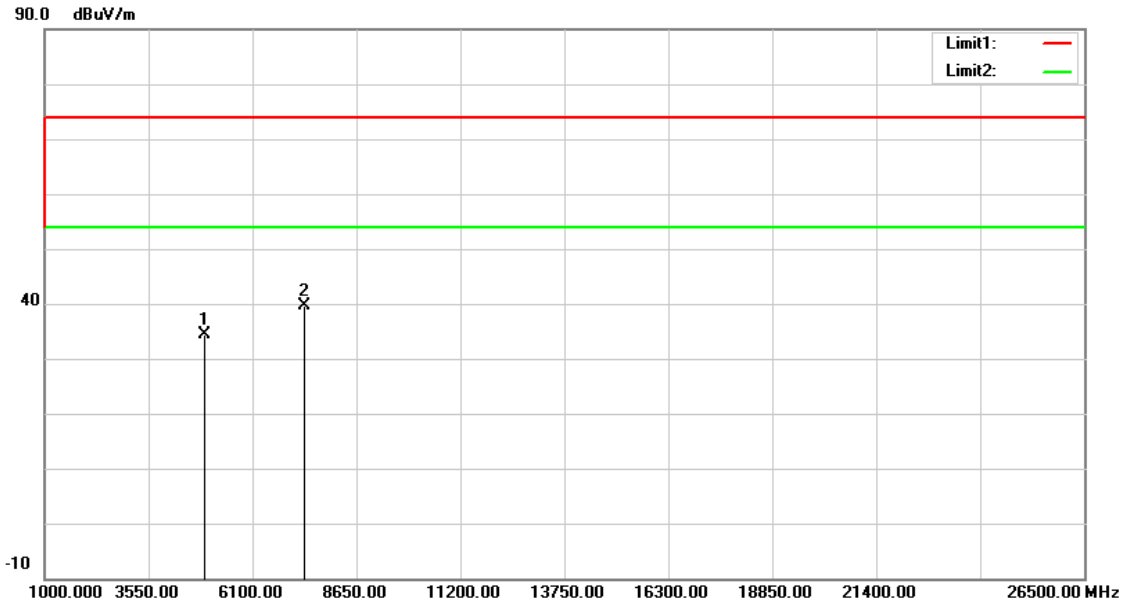


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	35.11	-0.63	34.48	74.00	-39.52	peak
2	7386.000	32.82	6.75	39.57	74.00	-34.43	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

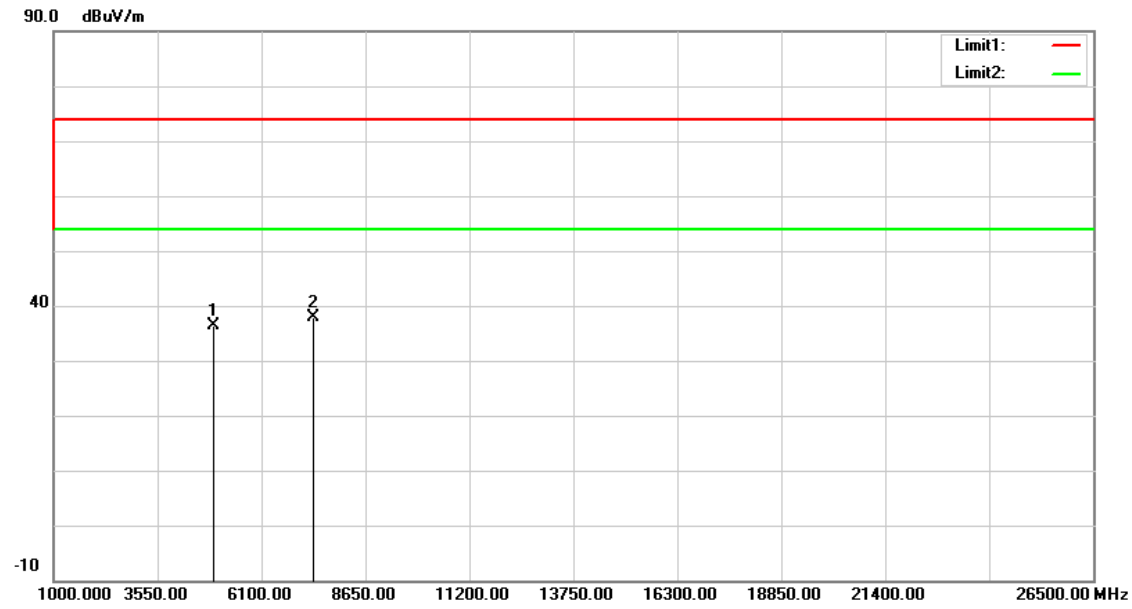


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	36.92	-0.63	36.29	74.00	-37.71	peak
2	7386.000	31.22	6.75	37.97	74.00	-36.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

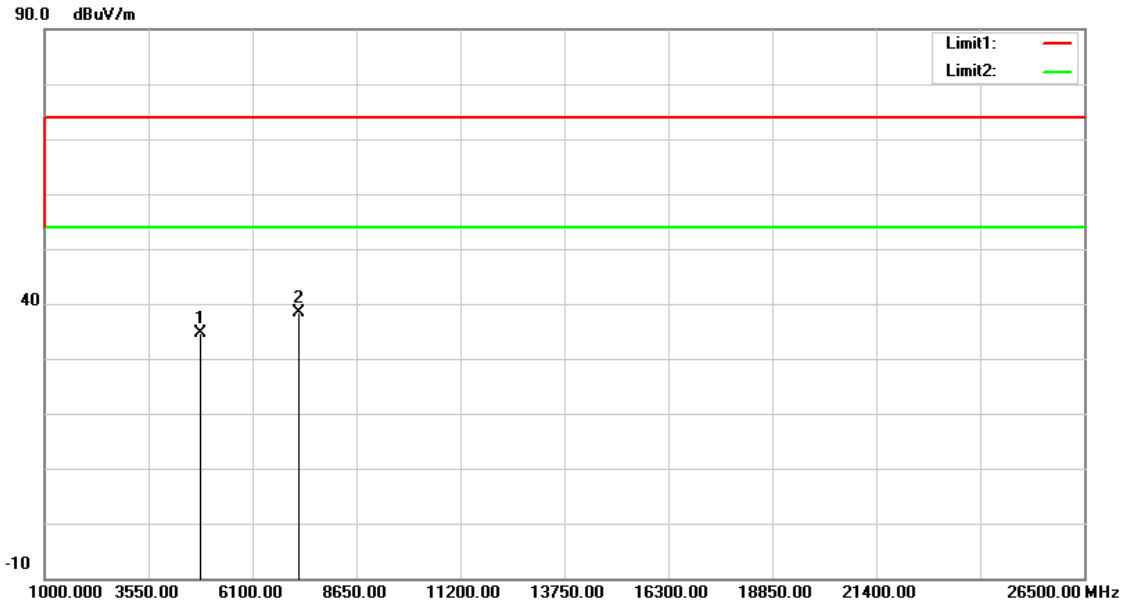


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	35.55	-0.98	34.57	74.00	-39.43	peak
2	7236.000	32.29	6.16	38.45	74.00	-35.55	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

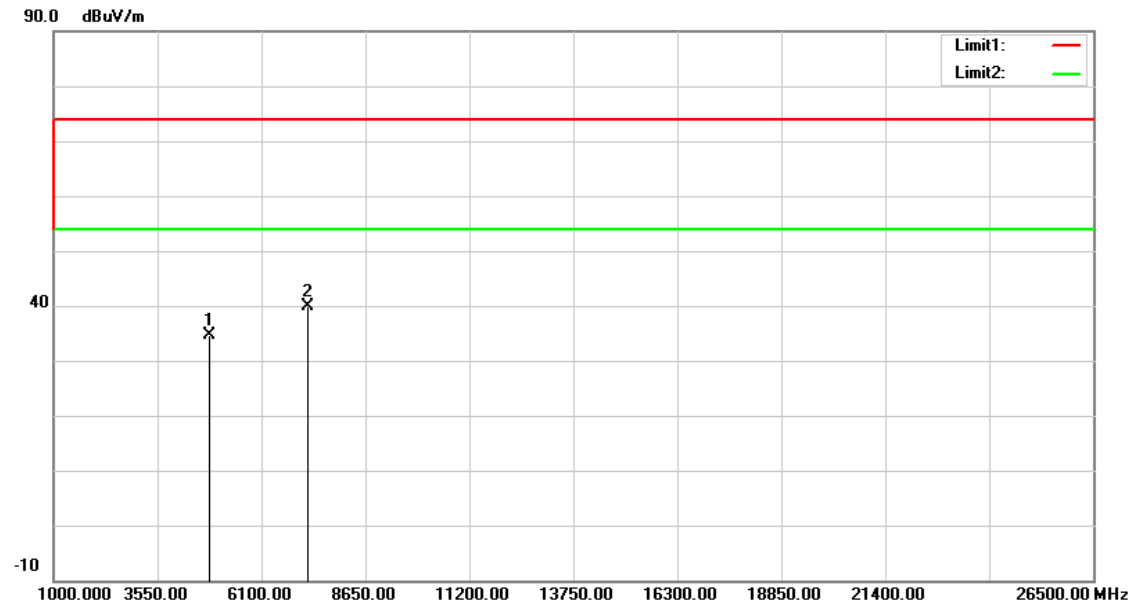


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	35.68	-0.98	34.70	74.00	-39.30	peak
2	7236.000	33.72	6.16	39.88	74.00	-34.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

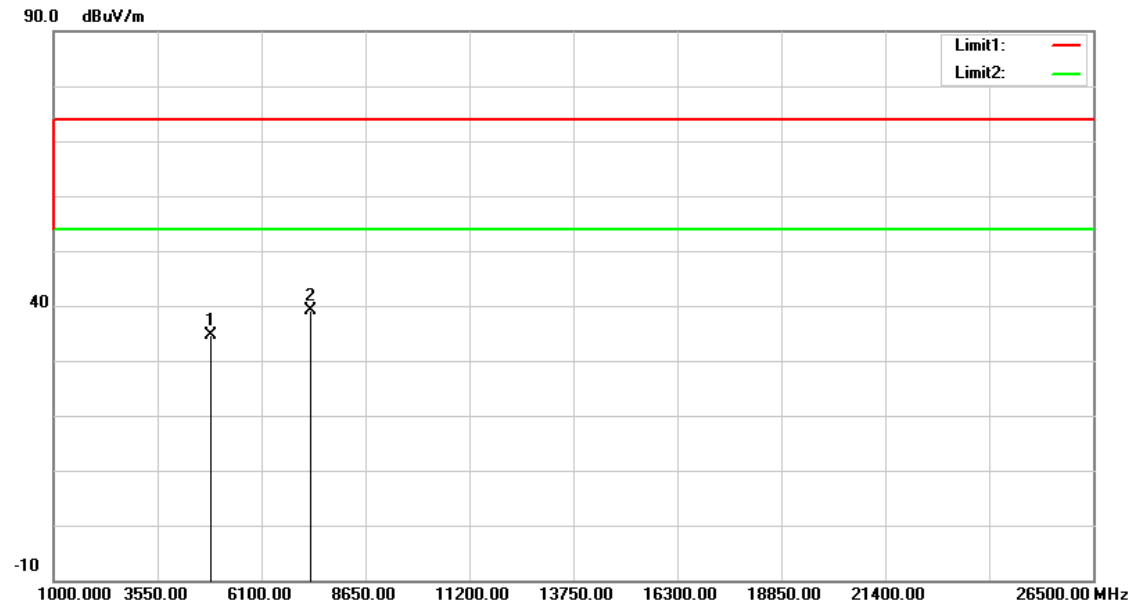


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	35.50	-0.80	34.70	74.00	-39.30	peak
2	7311.000	32.69	6.46	39.15	74.00	-34.85	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

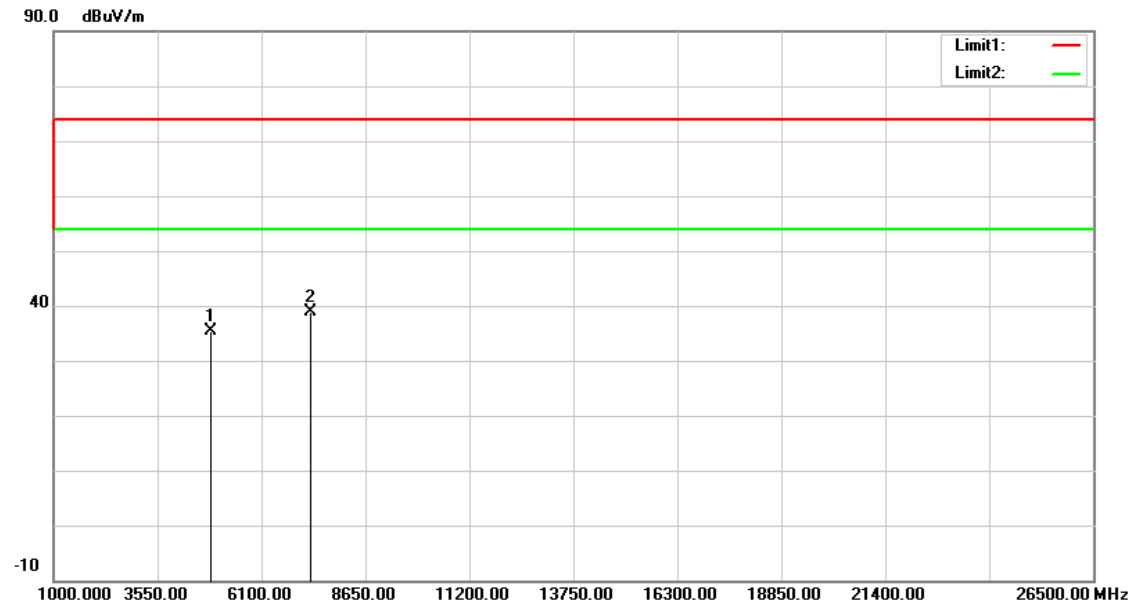


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	36.06	-0.80	35.26	74.00	-38.74	peak
2	7311.000	32.43	6.46	38.89	74.00	-35.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

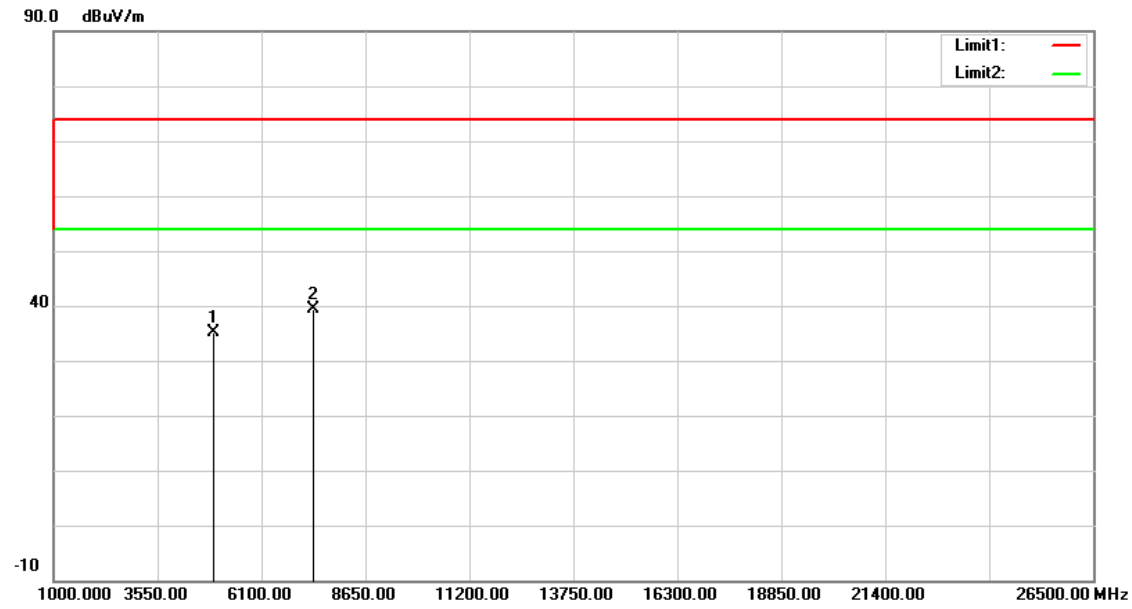


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	35.80	-0.63	35.17	74.00	-38.83	peak
2	7386.000	32.72	6.75	39.47	74.00	-34.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

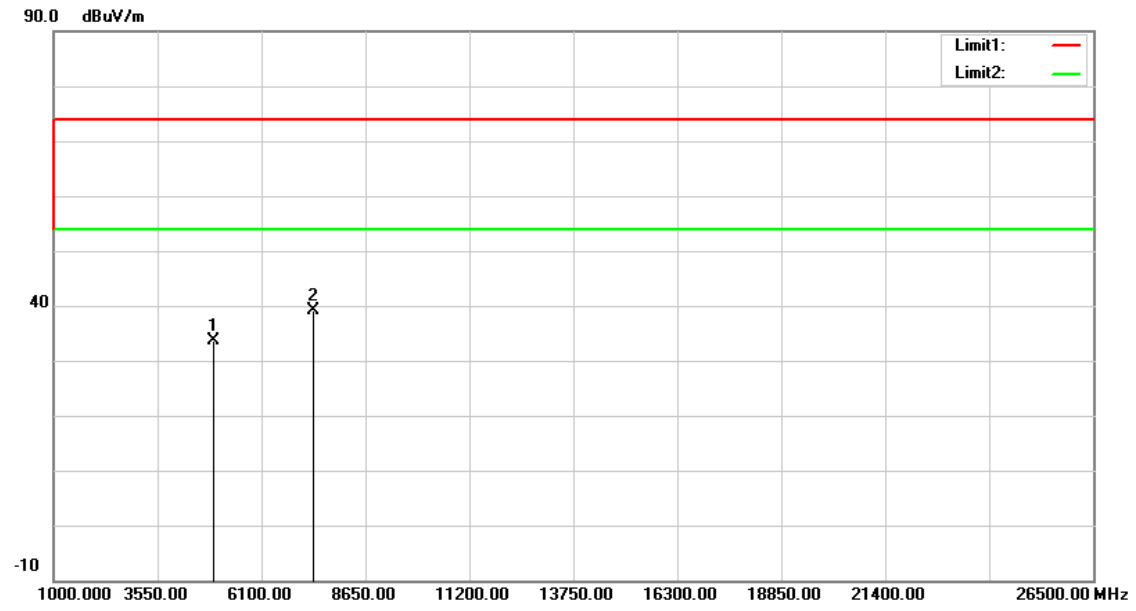


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	34.35	-0.63	33.72	74.00	-40.28	peak
2	7386.000	32.35	6.75	39.10	74.00	-34.90	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2422 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

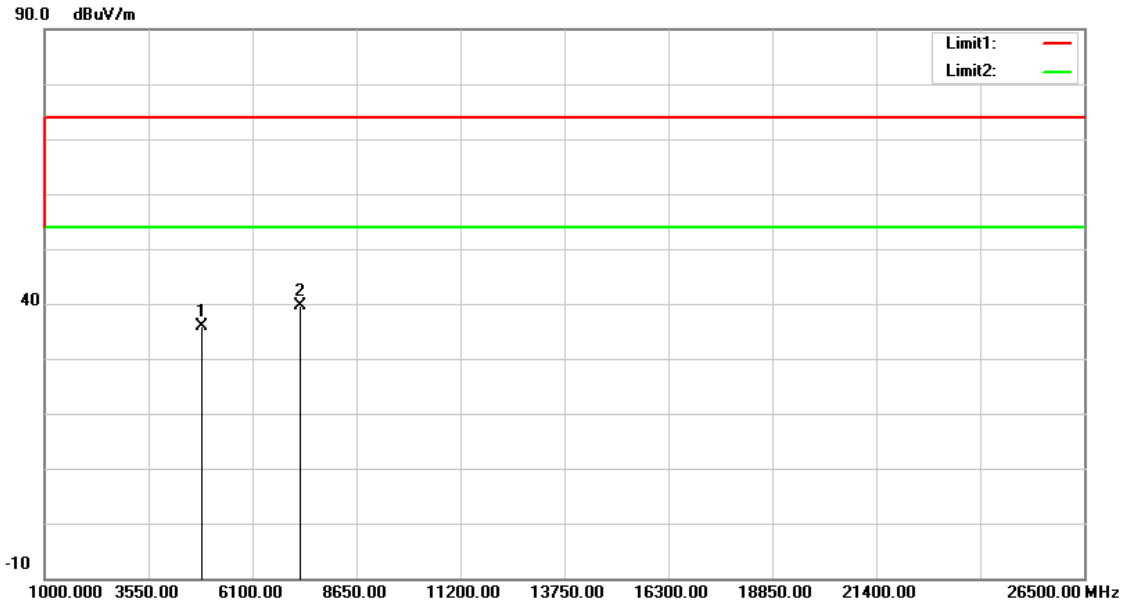


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	36.76	-0.90	35.86	74.00	-38.14	peak
2	7266.000	33.42	6.27	39.69	74.00	-34.31	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2422 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

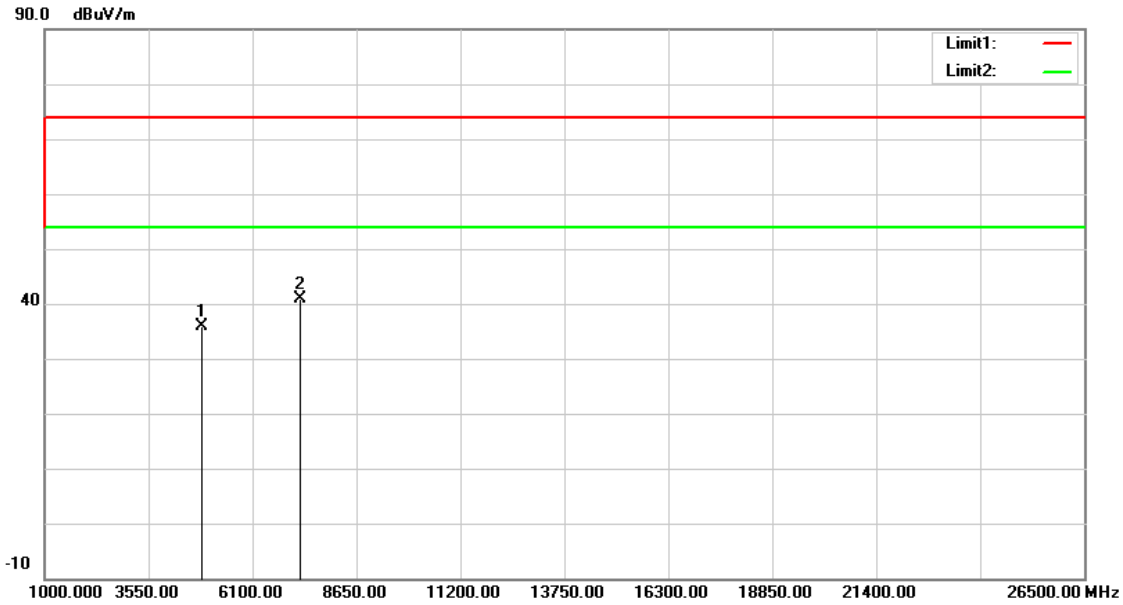


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	36.81	-0.90	35.91	74.00	-38.09	peak
2	7266.000	34.66	6.27	40.93	74.00	-33.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

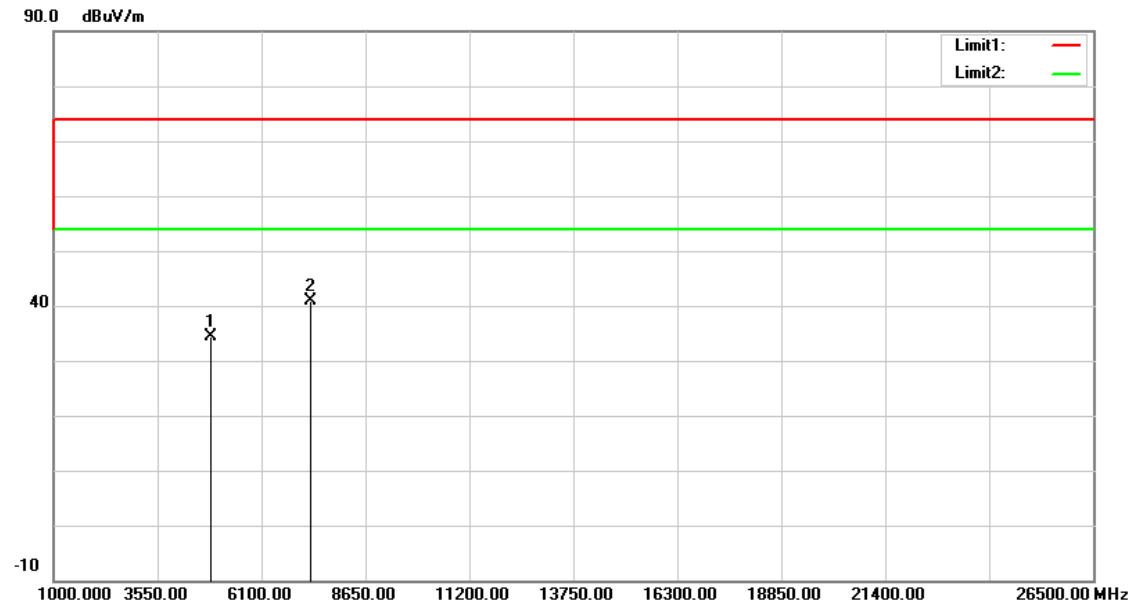


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	35.23	-0.80	34.43	74.00	-39.57	peak
2	7311.000	34.46	6.46	40.92	74.00	-33.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

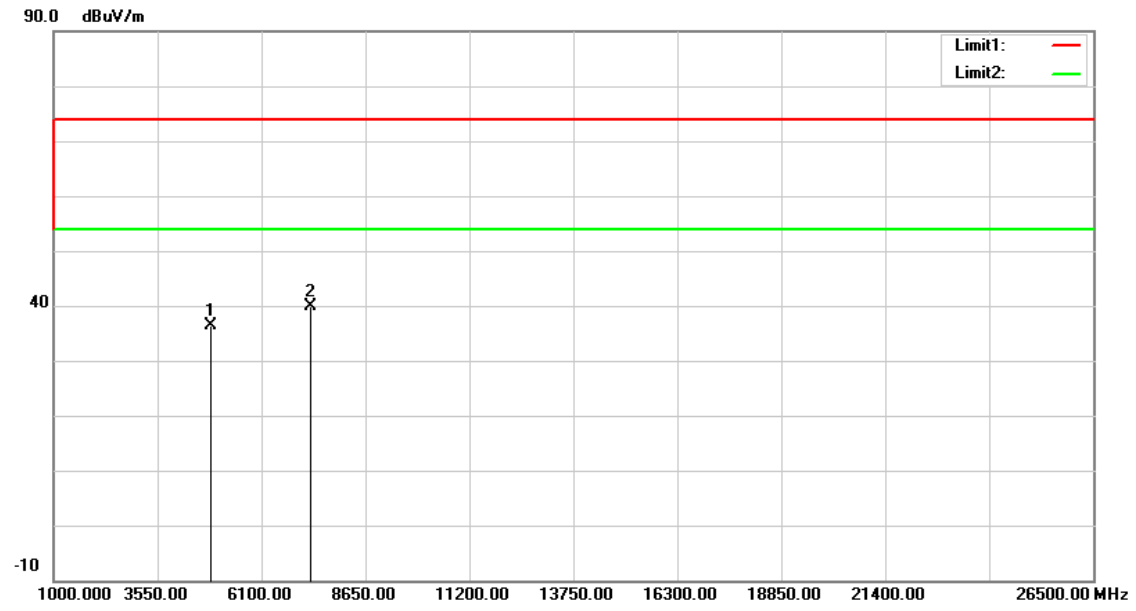


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.14	-0.80	36.34	74.00	-37.66	peak
2	7311.000	33.51	6.46	39.97	74.00	-34.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2452 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

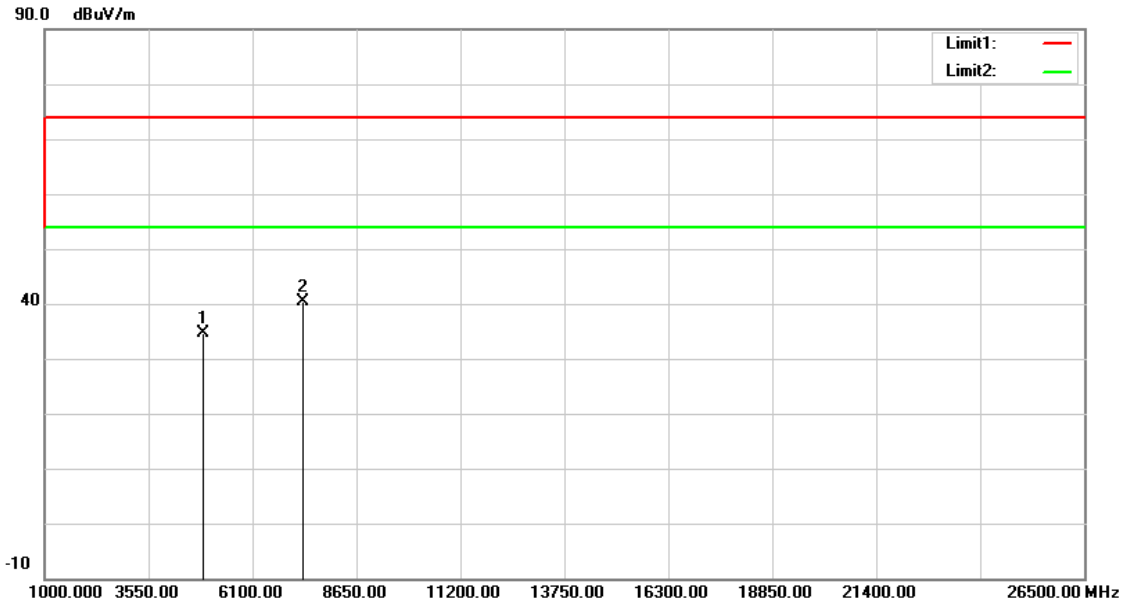


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	35.33	-0.69	34.64	74.00	-39.36	peak
2	7356.000	33.63	6.63	40.26	74.00	-33.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2452 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

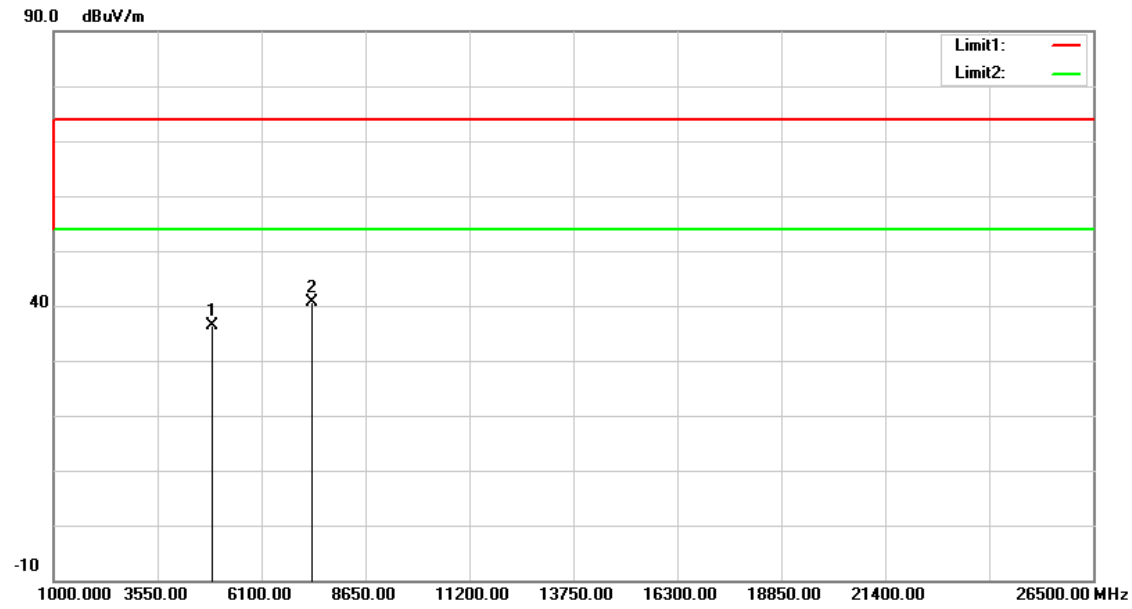


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	36.96	-0.69	36.27	74.00	-37.73	peak
2	7356.000	33.96	6.63	40.59	74.00	-33.41	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting		
	(Bluetooth + WLAN 2.4 GHz)		
Ant.Polar.:	Horizontal		

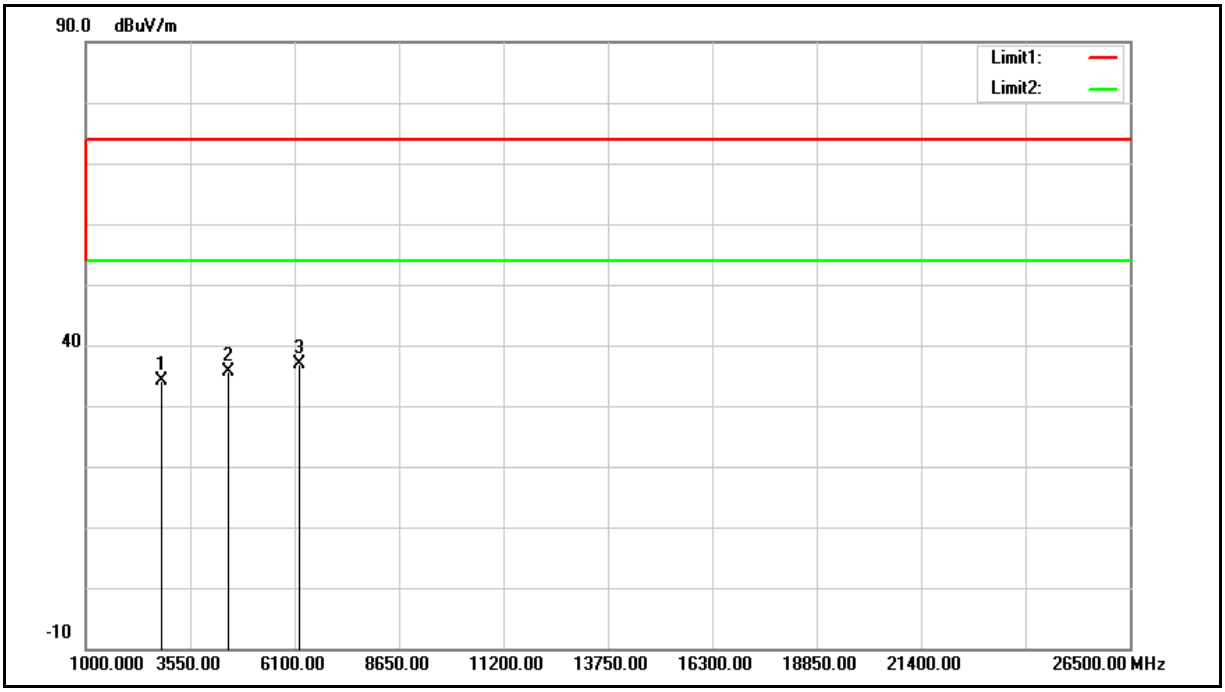


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2836.000	40.06	-5.84	34.22	74.00	-39.78	peak
2	4451.000	37.93	-2.25	35.68	74.00	-38.32	peak
3	6219.000	34.03	2.76	36.79	74.00	-37.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting		
	(Bluetooth + WLAN 2.4 GHz)		
Ant.Polar.:	Vertical		

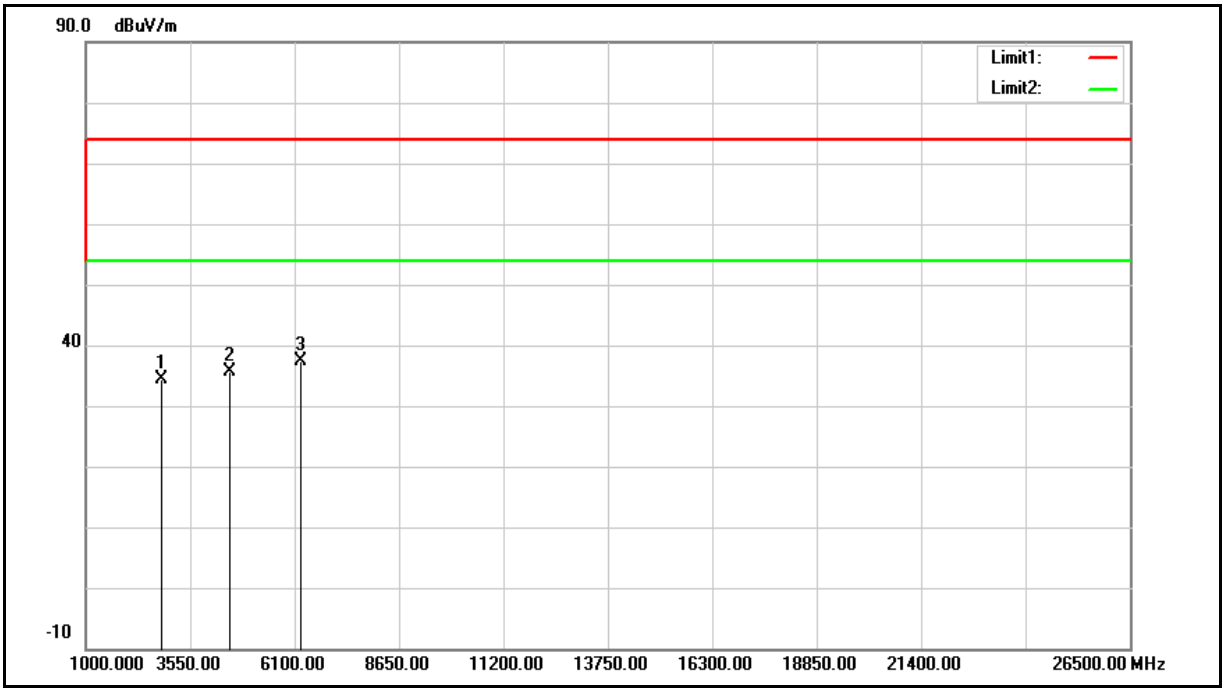


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2853.000	40.17	-5.78	34.39	74.00	-39.61	peak
2	4519.000	37.79	-2.04	35.75	74.00	-38.25	peak
3	6253.000	34.45	2.89	37.34	74.00	-36.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		
Description:			

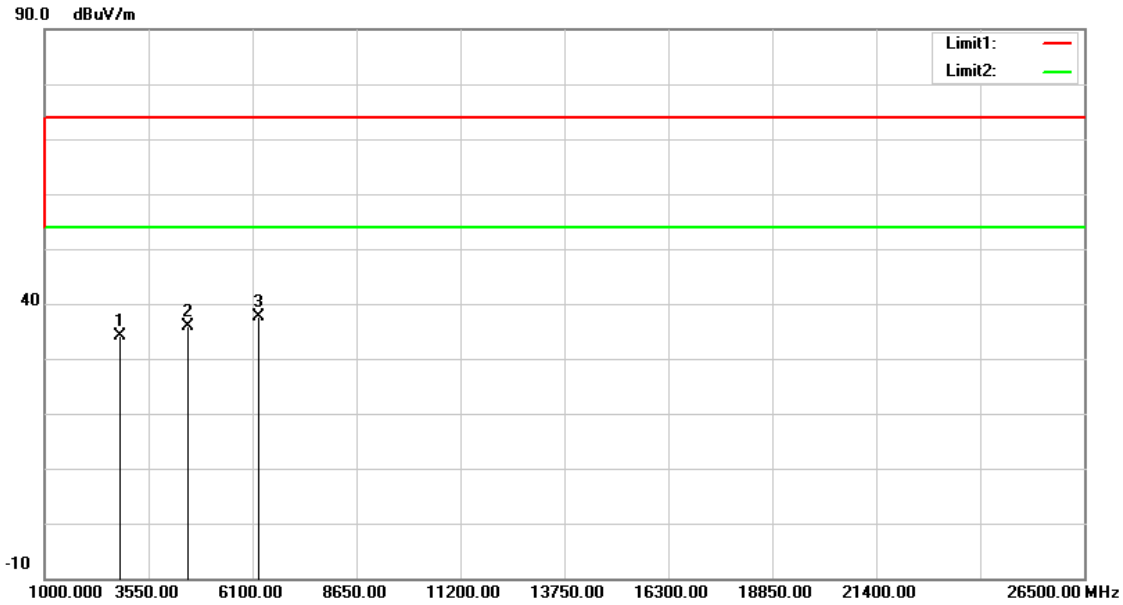


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2853.000	39.94	-5.78	34.16	74.00	-39.84	peak
2	4502.000	38.04	-2.10	35.94	74.00	-38.06	peak
3	6253.000	34.71	2.89	37.60	74.00	-36.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 12		
Ant.Polar.:	Vertical		
Description:			

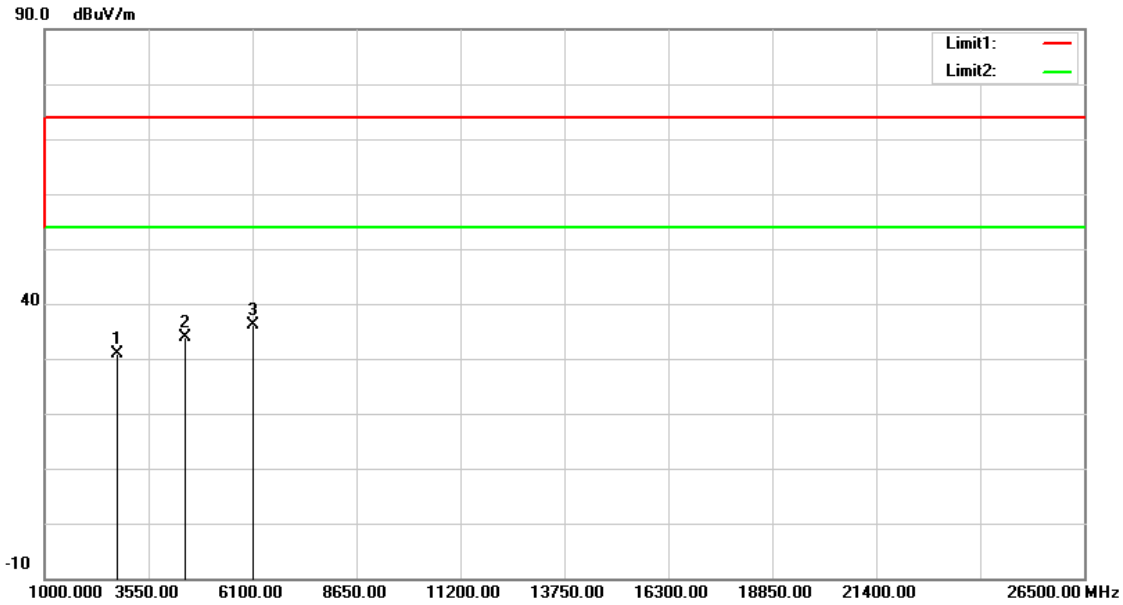

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2785.000	36.80	-6.00	30.80	74.00	-43.20	peak
2	4434.000	36.28	-2.30	33.98	74.00	-40.02	peak
3	6117.000	33.85	2.37	36.22	74.00	-37.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

頻帶邊緣

Peak

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

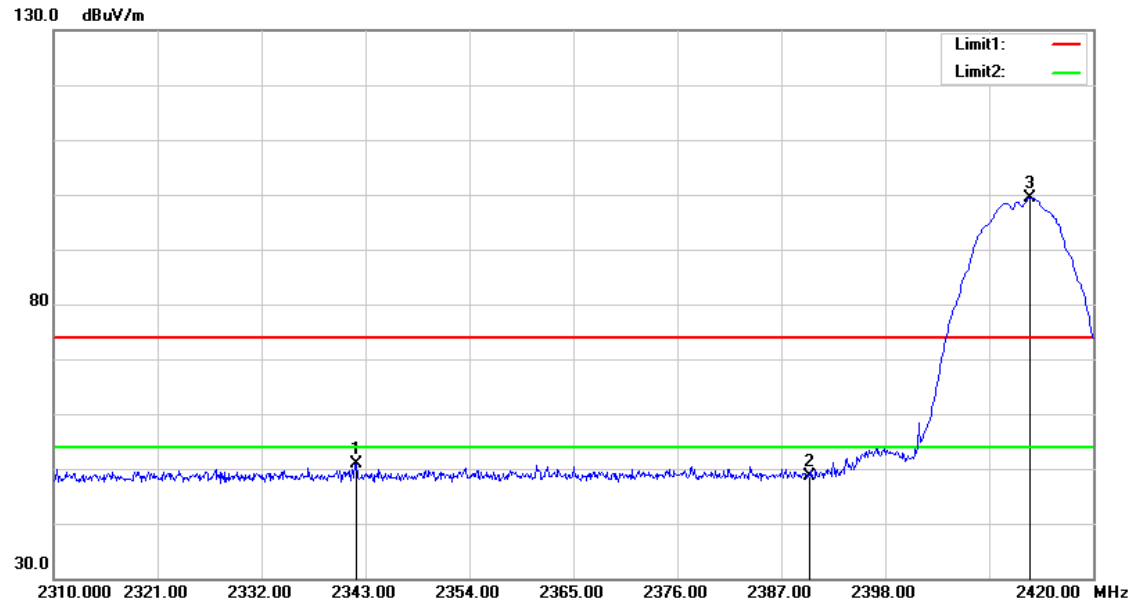


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2342.010	58.37	-7.50	50.87	74.00	-23.13	peak
2	2390.000	55.86	-7.30	48.56	74.00	-25.44	peak
3	2413.290	106.65	-7.21	99.44	74.00	25.44	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

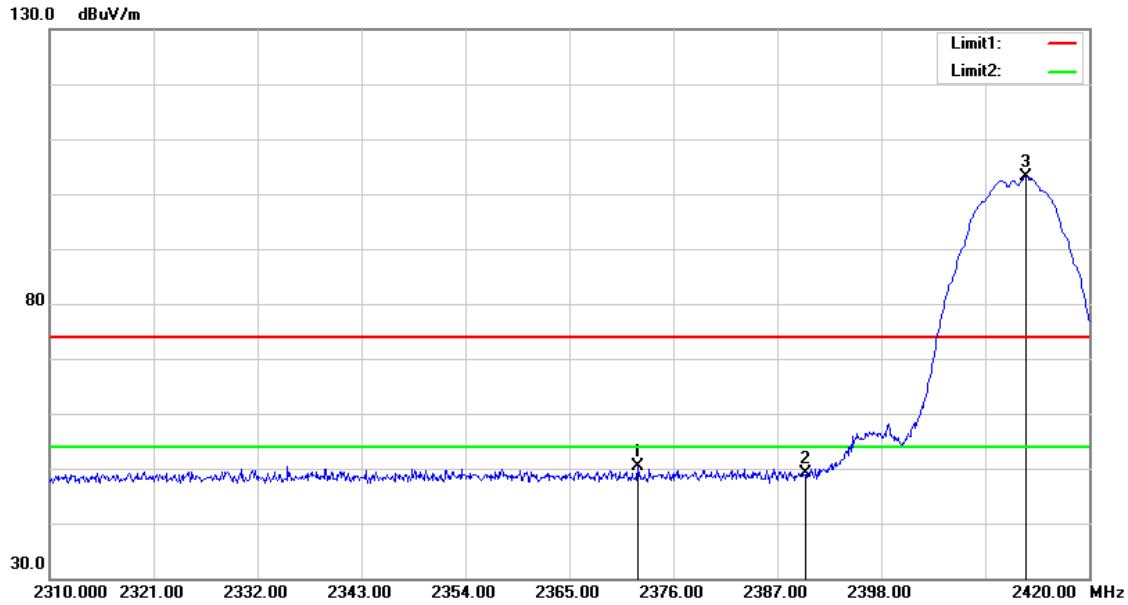


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2372.260	57.79	-7.38	50.41	74.00	-23.59	peak
2	2390.000	56.51	-7.30	49.21	74.00	-24.79	peak
3	2413.290	110.29	-7.21	103.08	74.00	29.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

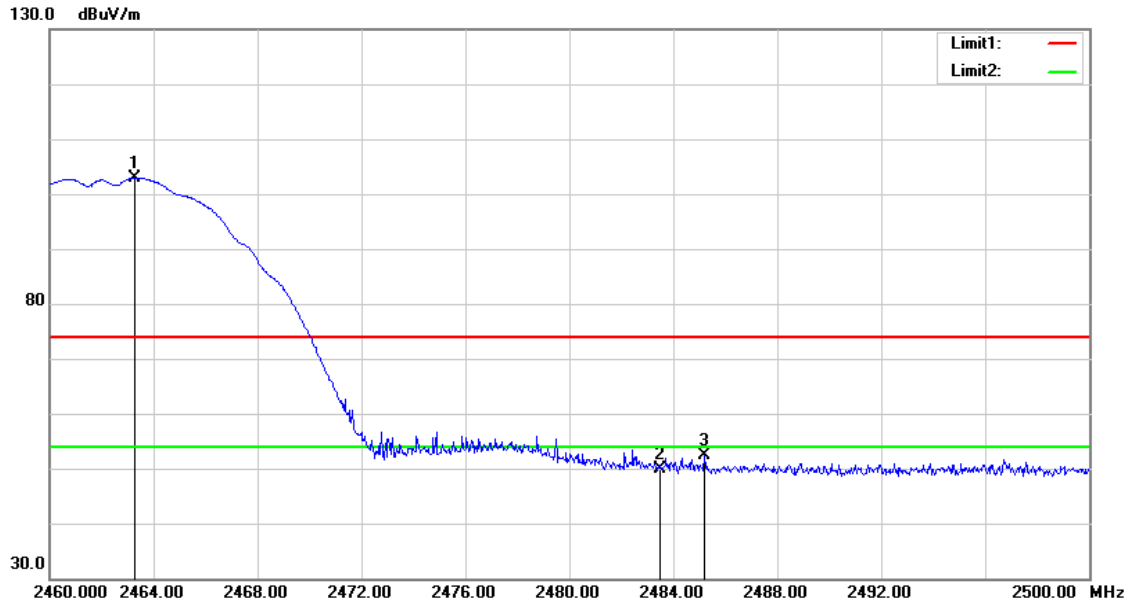


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.280	109.98	-7.00	102.98	74.00	28.98	peak
2	2483.500	56.82	-6.94	49.88	74.00	-24.12	peak
3	2485.200	59.32	-6.92	52.40	74.00	-21.60	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

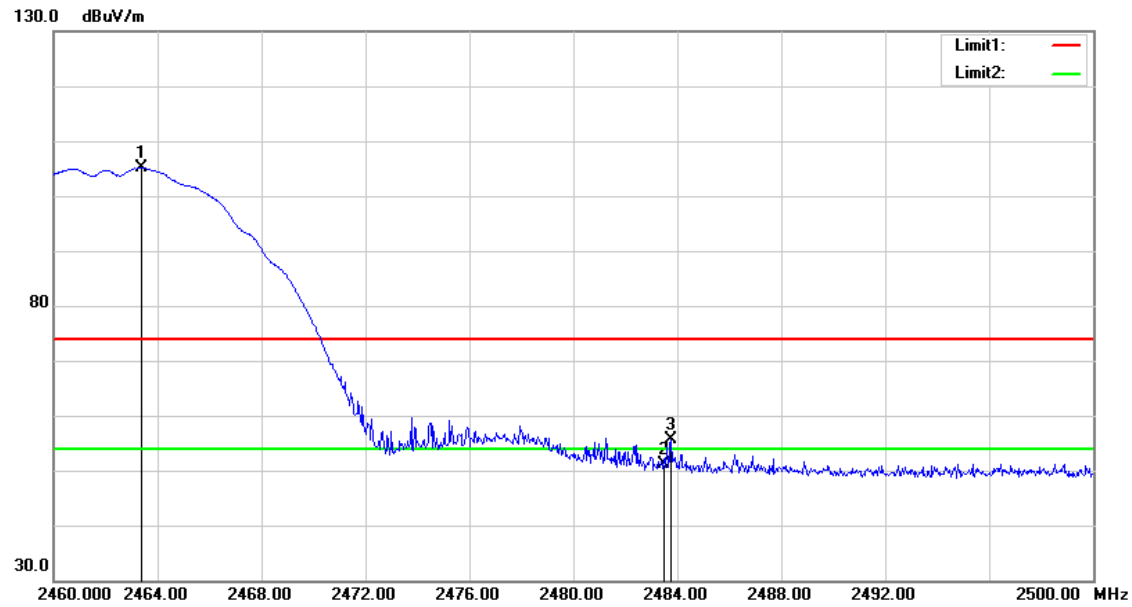


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.400	112.14	-7.00	105.14	74.00	31.14	peak
2	2483.500	58.00	-6.94	51.06	74.00	-22.94	peak
3	2483.760	62.58	-6.94	55.64	74.00	-18.36	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

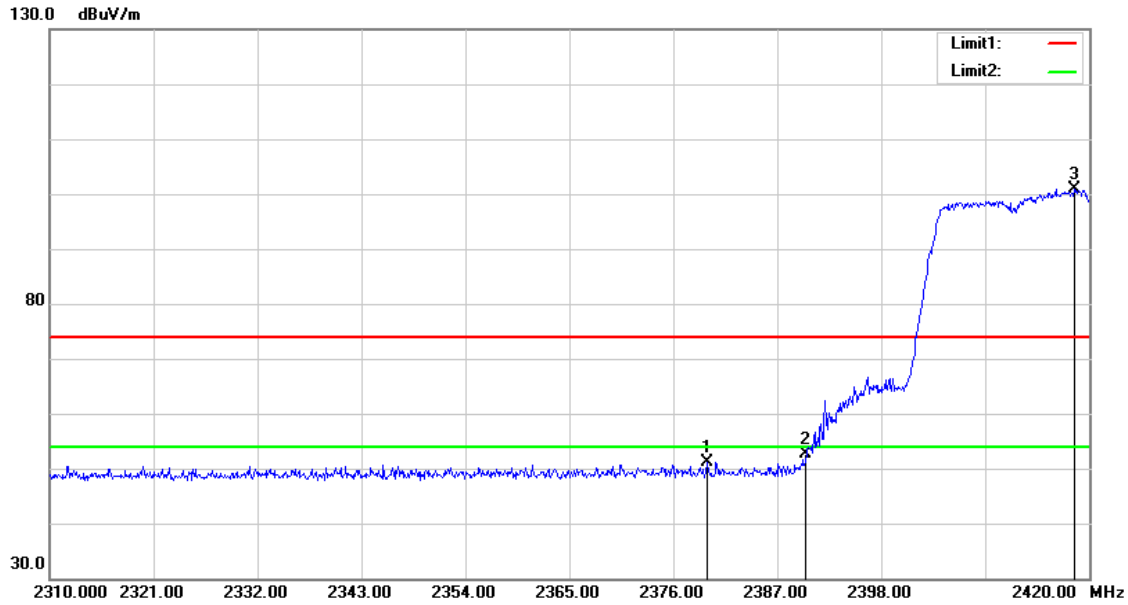


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2379.630	58.50	-7.35	51.15	74.00	-22.85	peak
2	2390.000	59.82	-7.30	52.52	74.00	-21.48	peak
3	2418.460	108.15	-7.20	100.95	74.00	26.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

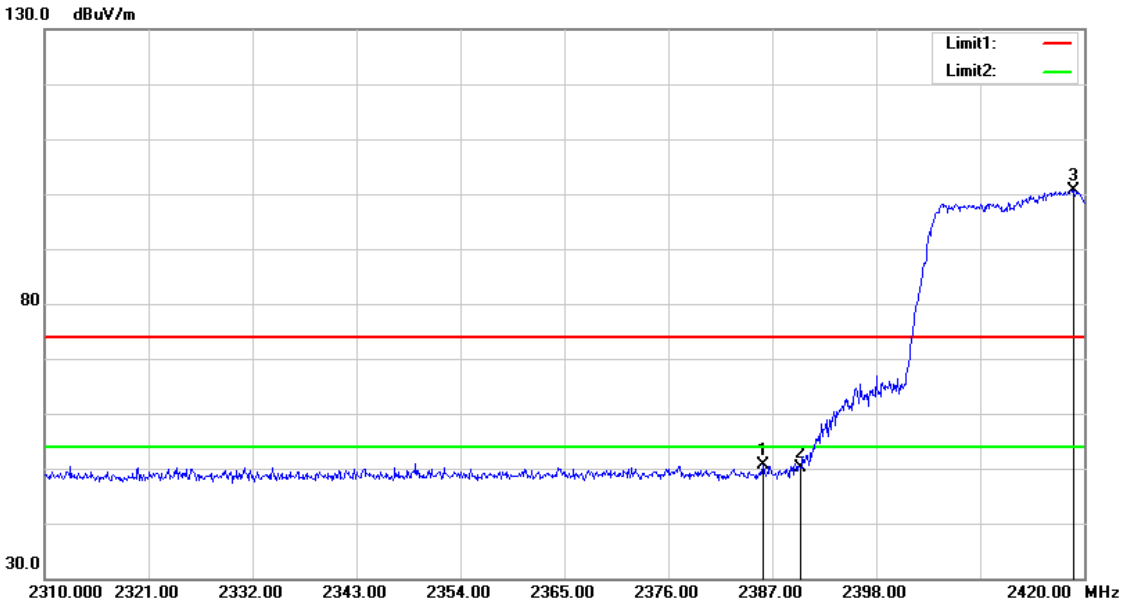


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.010	57.93	-7.33	50.60	74.00	-23.40	peak
2	2390.000	57.52	-7.30	50.22	74.00	-23.78	peak
3	2418.900	107.83	-7.20	100.63	74.00	26.63	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

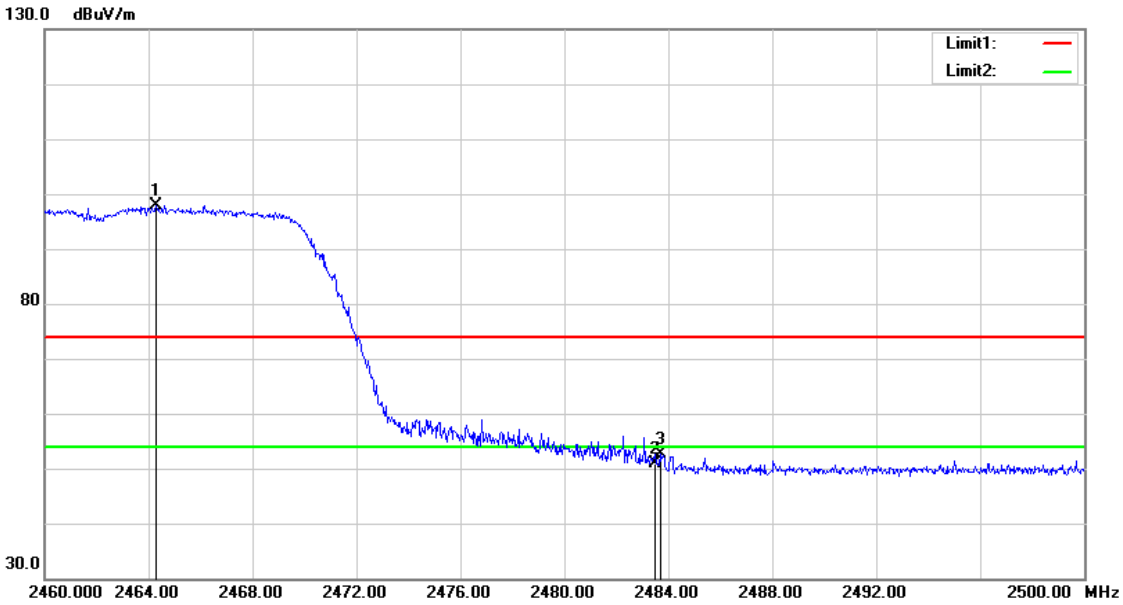


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2464.280	105.00	-7.00	98.00	74.00	24.00	peak
2	2483.500	57.90	-6.94	50.96	74.00	-23.04	peak
3	2483.680	59.47	-6.94	52.53	74.00	-21.47	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

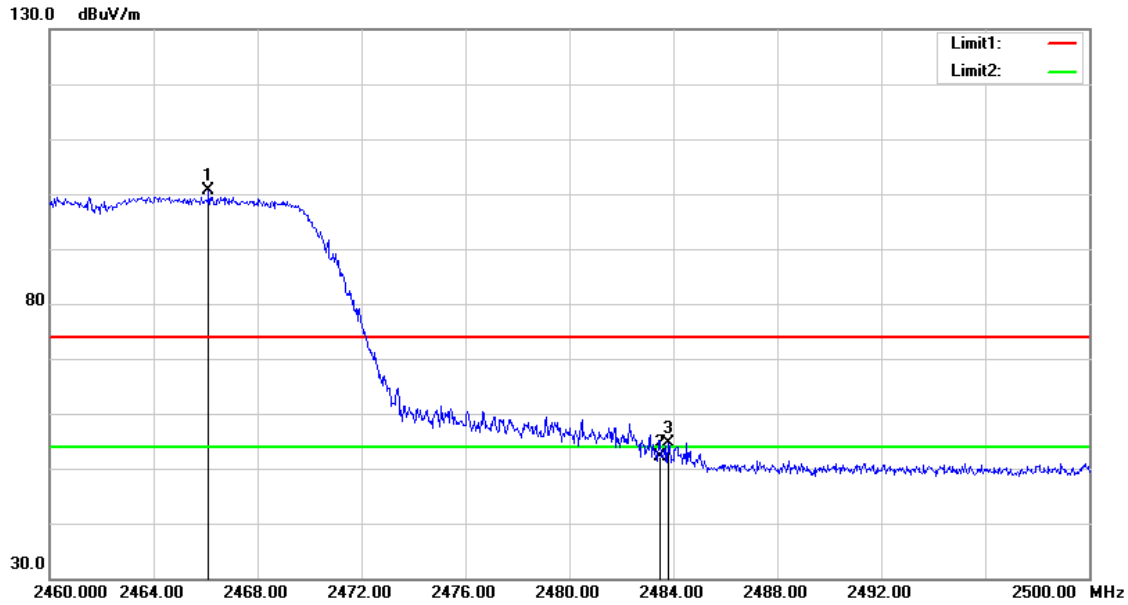


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2466.120	107.71	-6.99	100.72	74.00	26.72	peak
2	2483.500	59.17	-6.94	52.23	74.00	-21.77	peak
3	2483.800	61.52	-6.94	54.58	74.00	-19.42	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

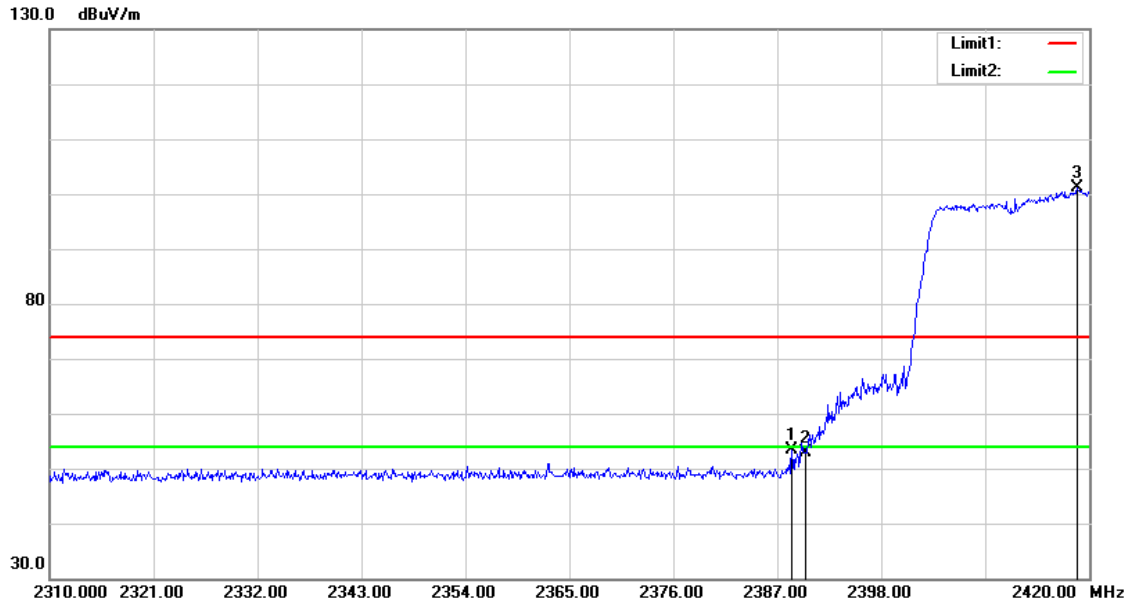


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.540	60.61	-7.31	53.30	74.00	-20.70	peak
2	2390.000	60.10	-7.30	52.80	74.00	-21.20	peak
3	2418.680	108.31	-7.20	101.11	74.00	27.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

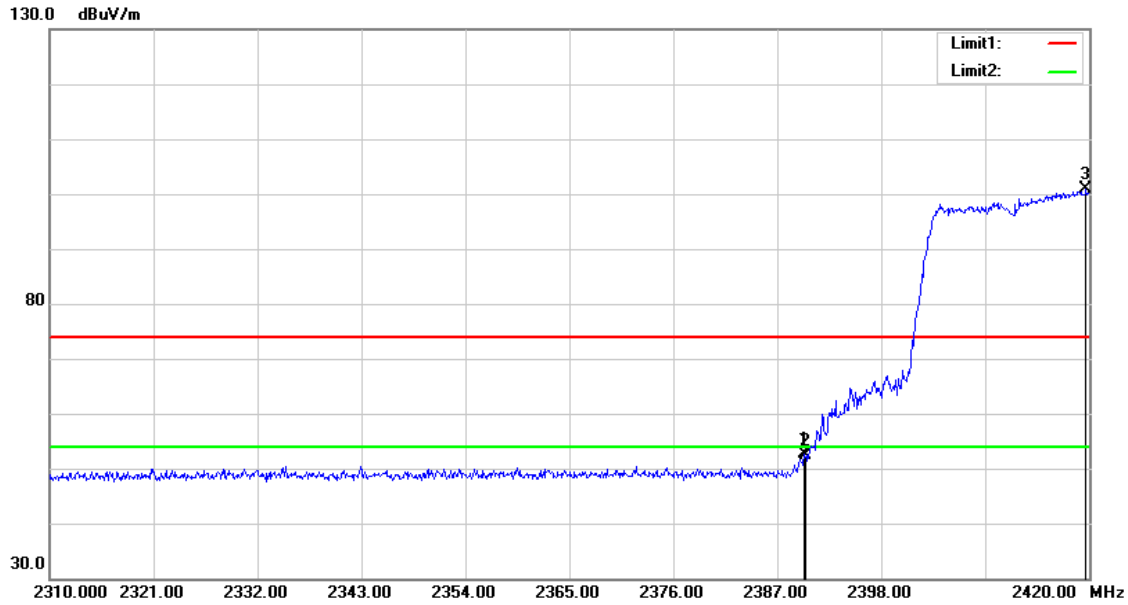


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.860	59.82	-7.30	52.52	74.00	-21.48	peak
2	2390.000	59.60	-7.30	52.30	74.00	-21.70	peak
3	2419.670	108.01	-7.19	100.82	74.00	26.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

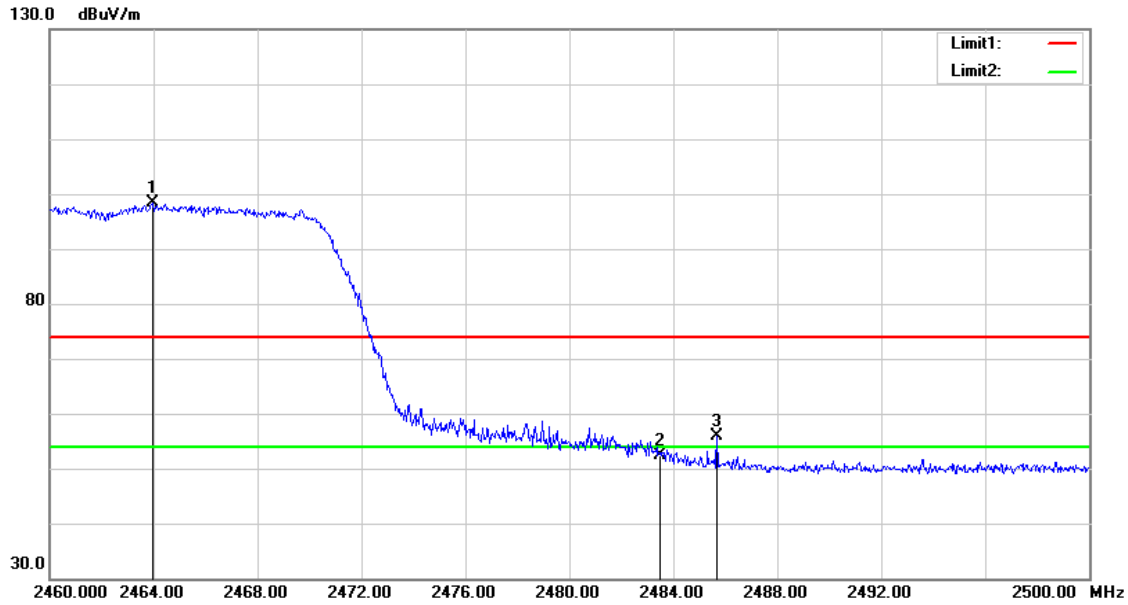


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.960	105.39	-7.00	98.39	74.00	24.39	peak
2	2483.500	59.29	-6.94	52.35	74.00	-21.65	peak
3	2485.680	62.87	-6.92	55.95	74.00	-18.05	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

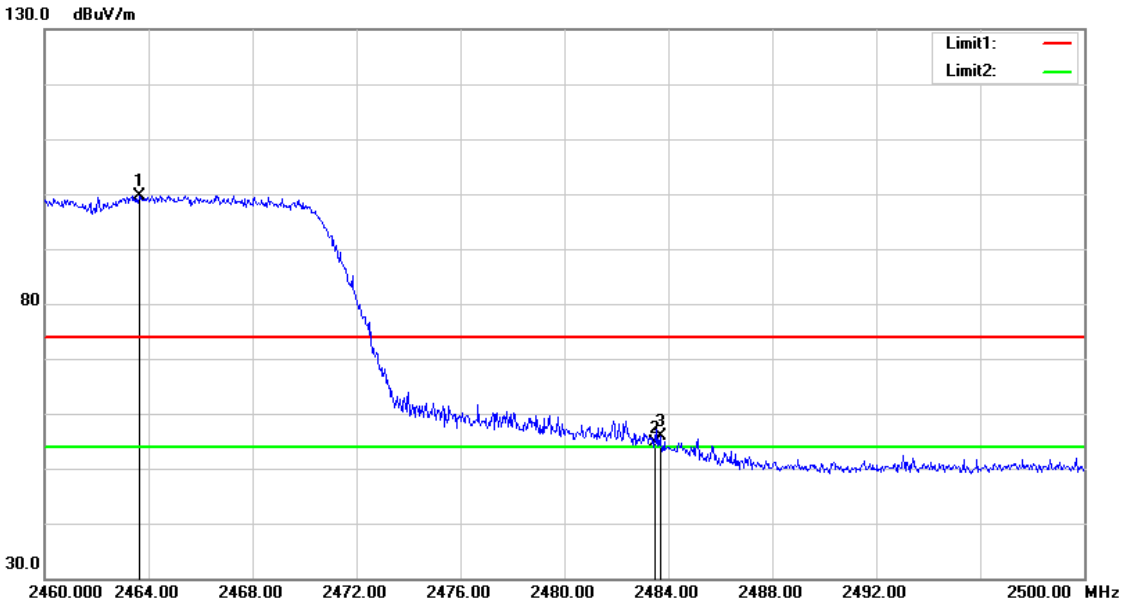


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.640	106.61	-7.00	99.61	74.00	25.61	peak
2	2483.500	61.45	-6.94	54.51	74.00	-19.49	peak
3	2483.680	62.77	-6.94	55.83	74.00	-18.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2422 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

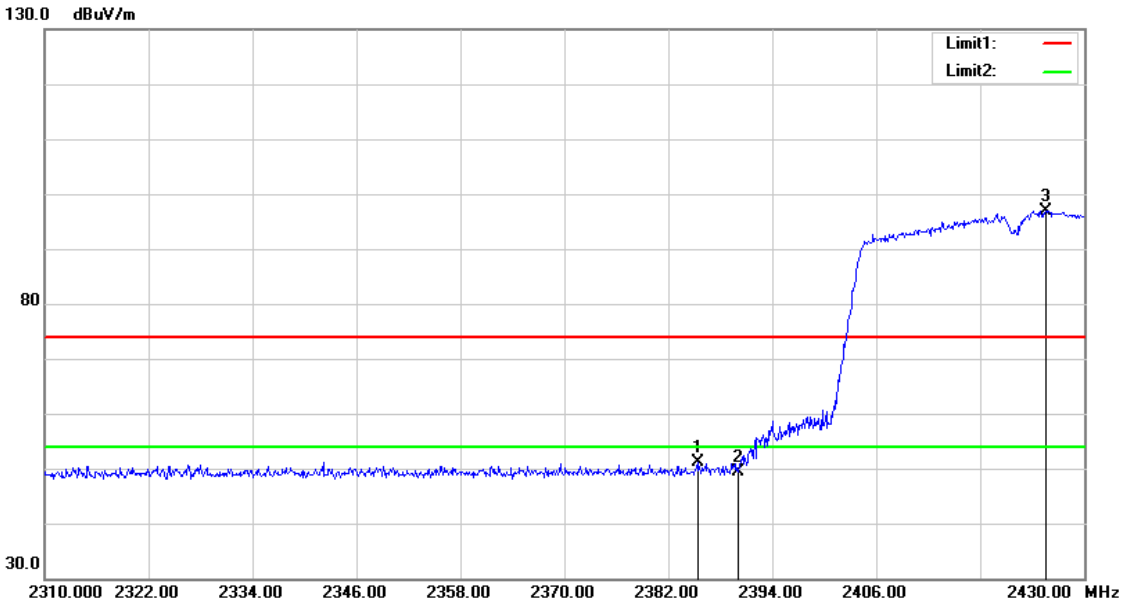


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.360	58.42	-7.33	51.09	74.00	-22.91	peak
2	2390.000	56.67	-7.30	49.37	74.00	-24.63	peak
3	2425.560	104.15	-7.17	96.98	74.00	22.98	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2422 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

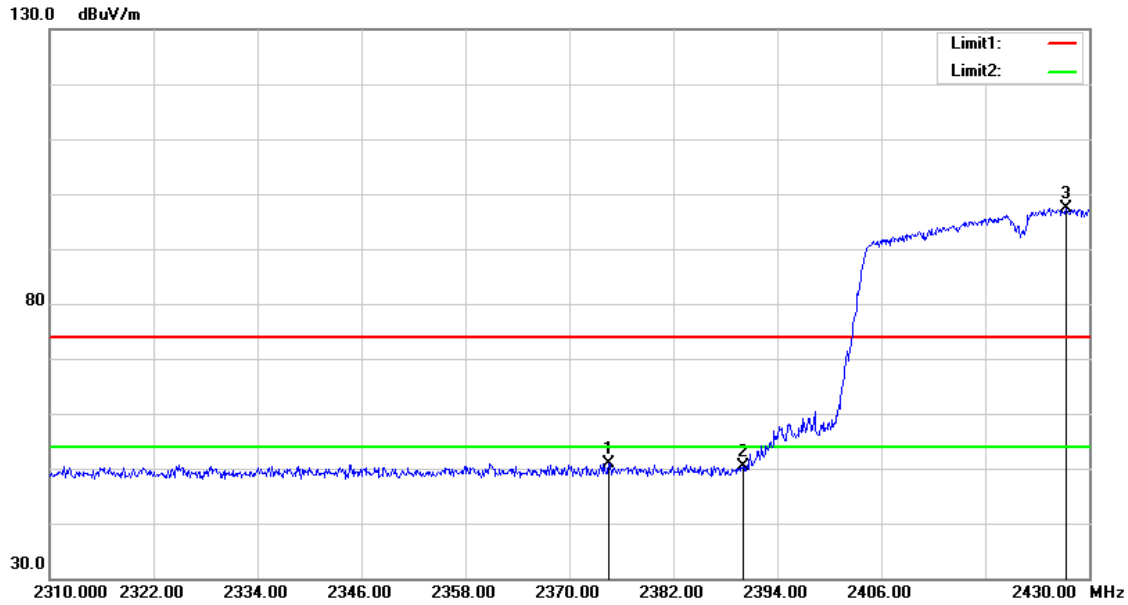


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2374.560	58.33	-7.37	50.96	74.00	-23.04	peak
2	2390.000	57.66	-7.30	50.36	74.00	-23.64	peak
3	2427.360	104.54	-7.15	97.39	74.00	23.39	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

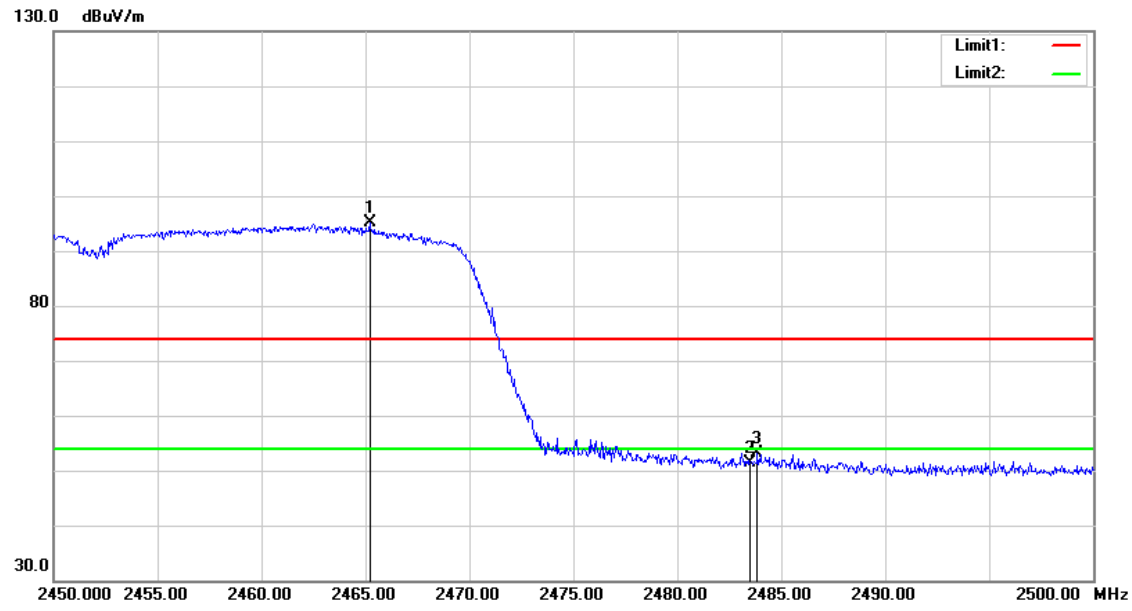


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2465.200	102.19	-7.00	95.19	74.00	21.19	peak
2	2483.500	58.30	-6.94	51.36	74.00	-22.64	peak
3	2483.850	59.97	-6.94	53.03	74.00	-20.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

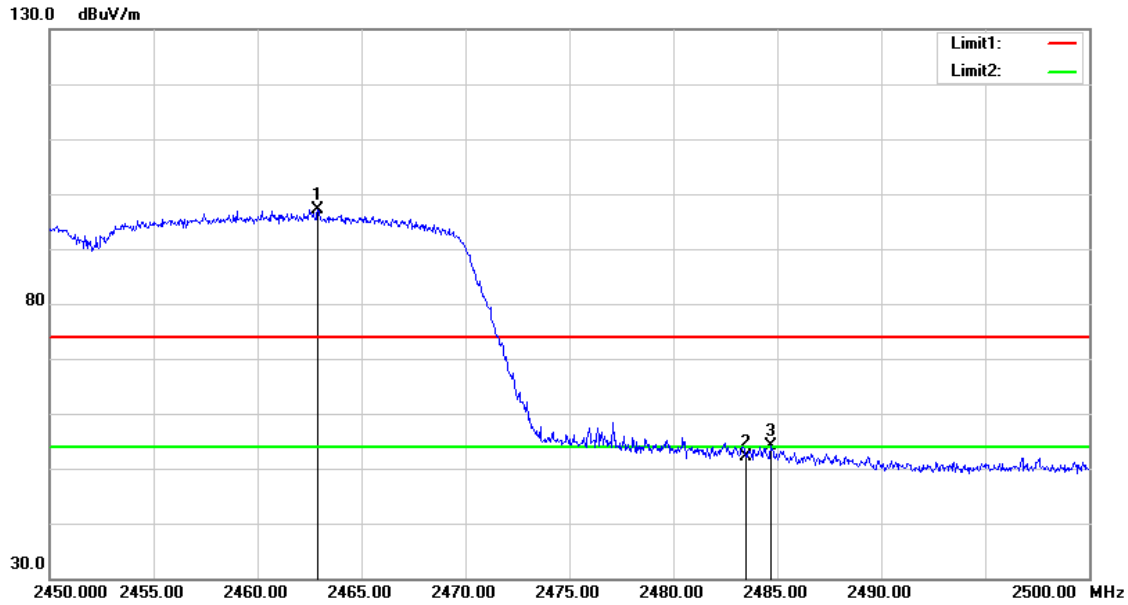

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2462.900	104.17	-7.01	97.16	74.00	23.16	peak
2	2483.500	59.00	-6.94	52.06	74.00	-21.94	peak
3	2484.700	61.07	-6.92	54.15	74.00	-19.85	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Average

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

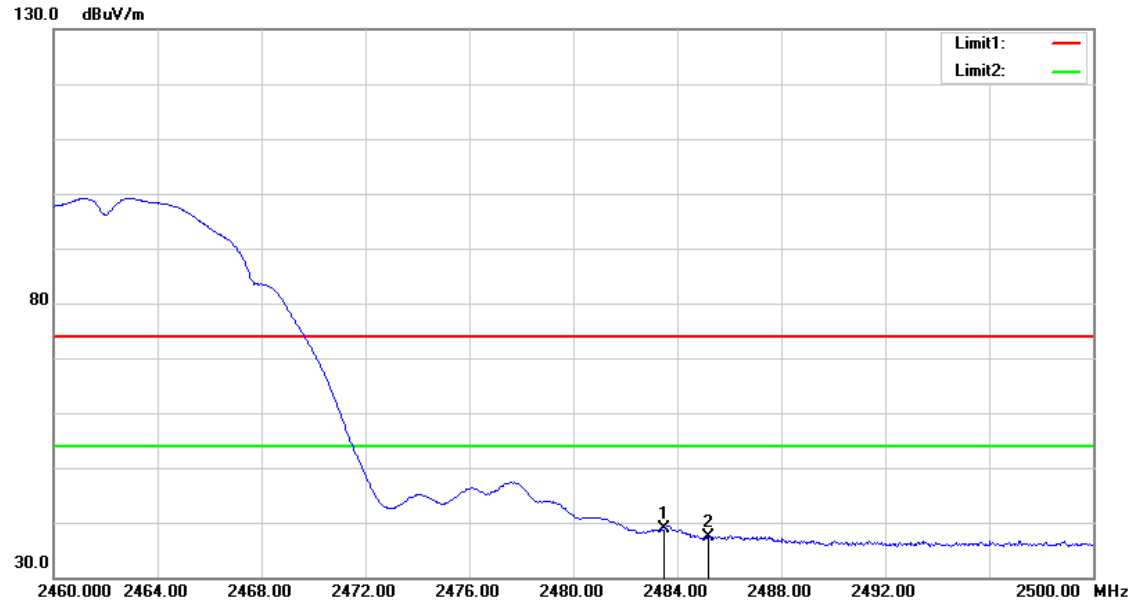


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	45.75	-6.94	38.81	54.00	-15.19	AVG
2	2485.200	44.29	-6.92	37.37	54.00	-16.63	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

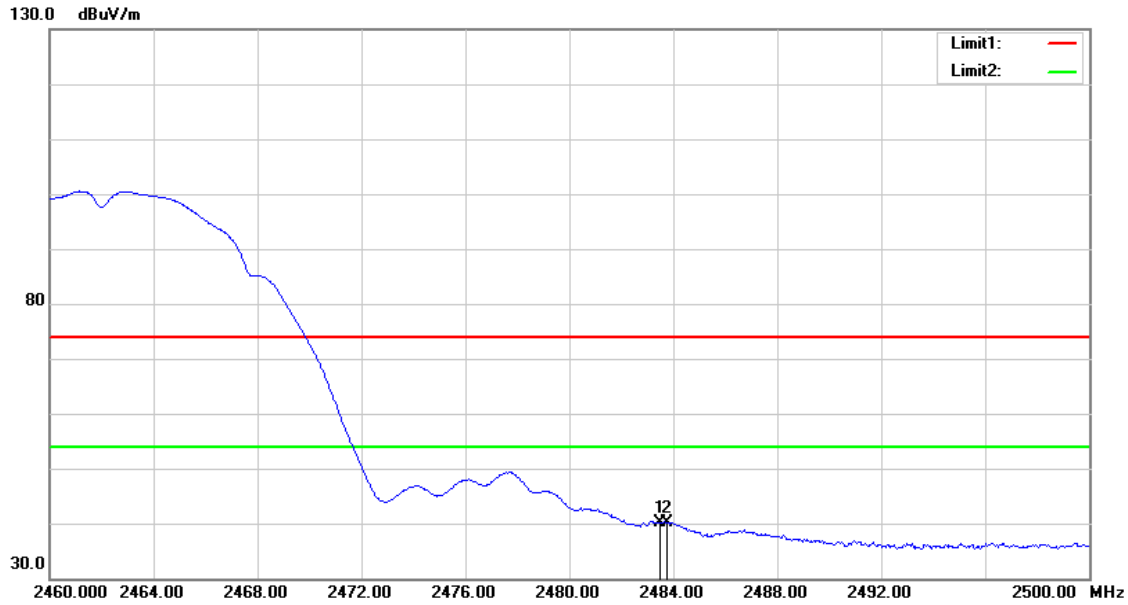


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	46.98	-6.94	40.04	54.00	-13.96	AVG
2	2483.760	47.16	-6.94	40.22	54.00	-13.78	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

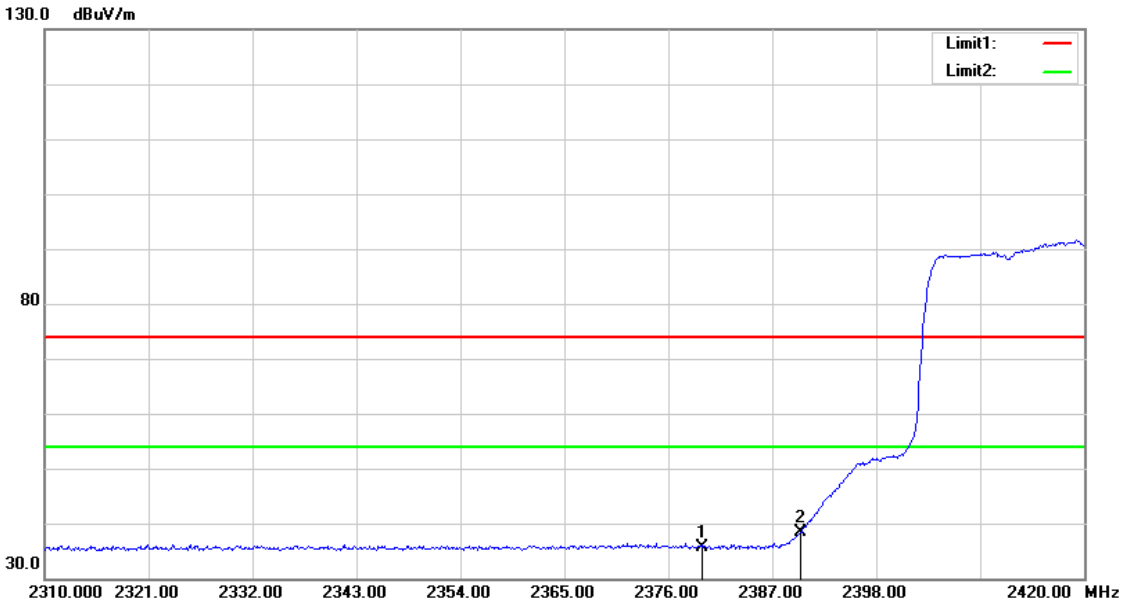


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2379.630	43.04	-7.35	35.69	54.00	-18.31	AVG
2	2390.000	45.74	-7.30	38.44	54.00	-15.56	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

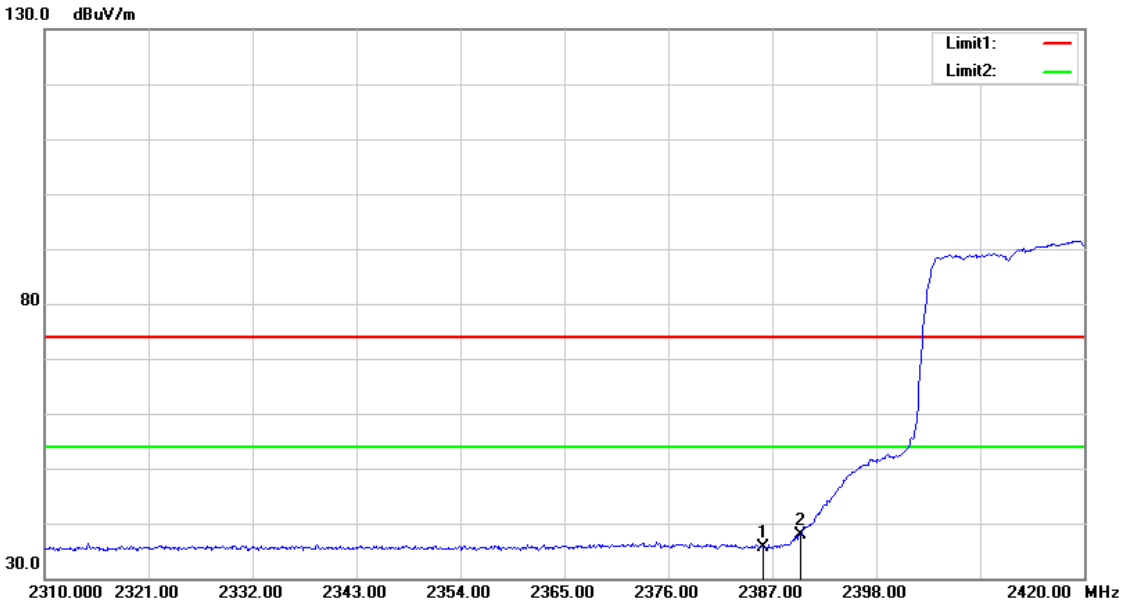


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.010	42.91	-7.33	35.58	54.00	-18.42	AVG
2	2390.000	45.28	-7.30	37.98	54.00	-16.02	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

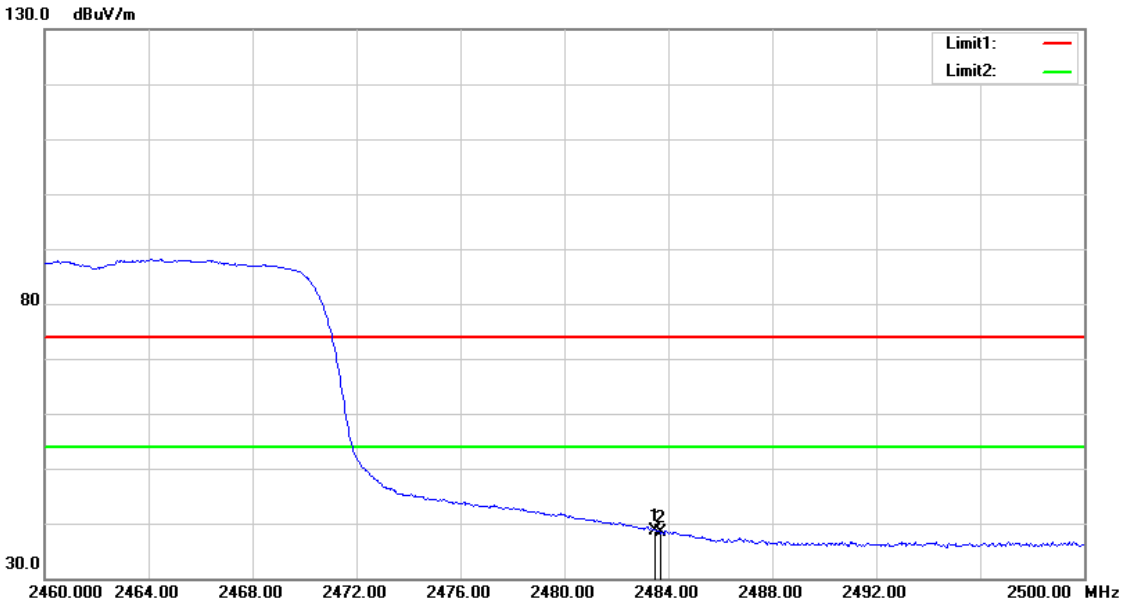


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	45.66	-6.94	38.72	54.00	-15.28	AVG
2	2483.680	45.41	-6.94	38.47	54.00	-15.53	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

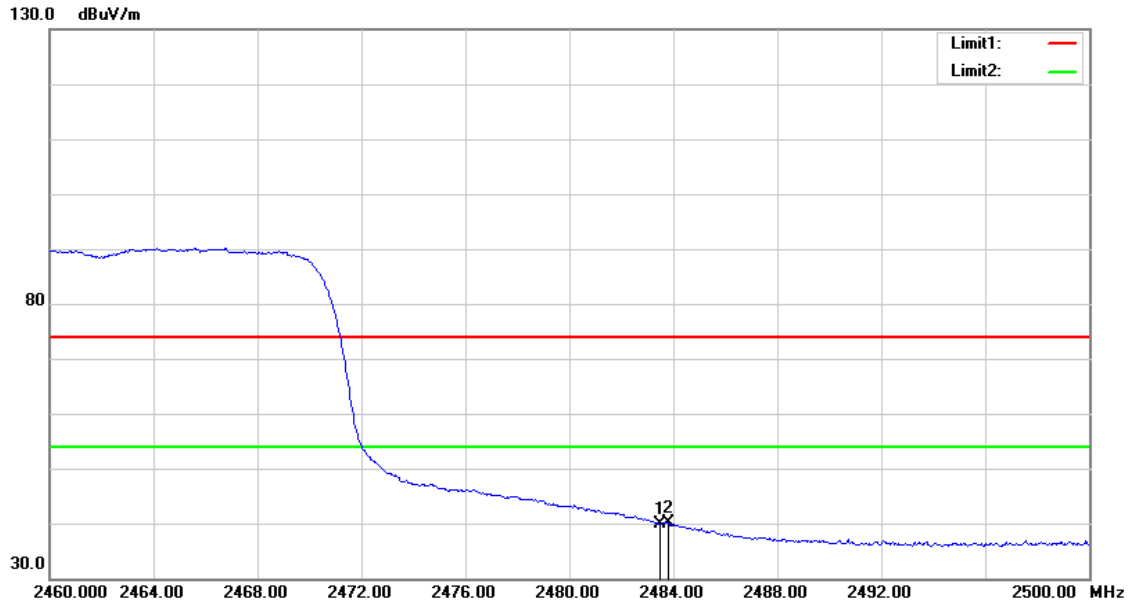


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	46.92	-6.94	39.98	54.00	-14.02	AVG
2	2483.800	47.03	-6.94	40.09	54.00	-13.91	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

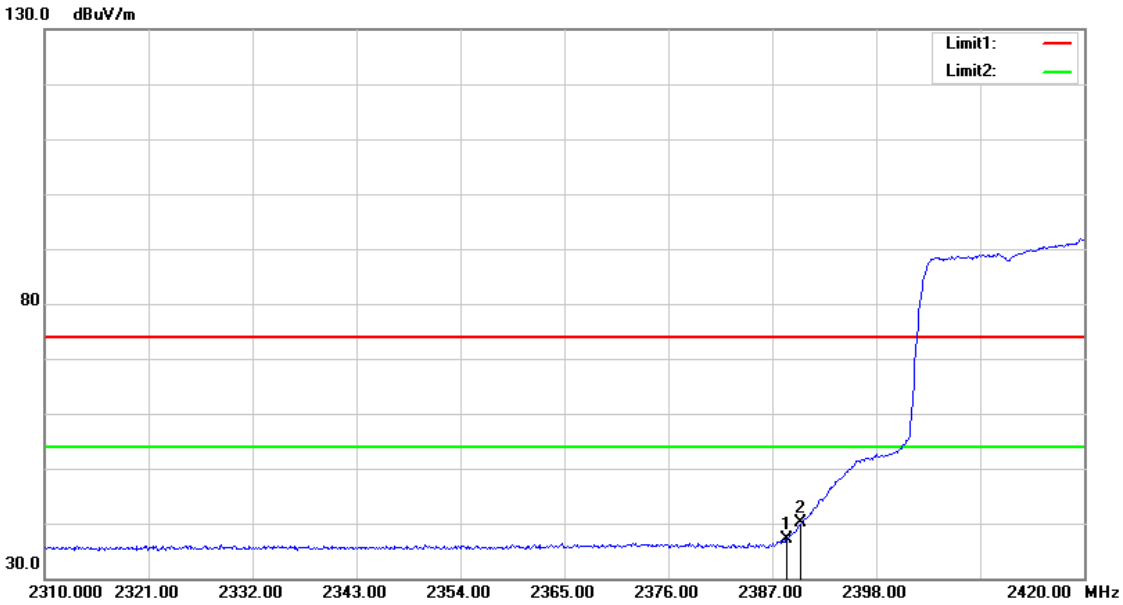


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.540	44.45	-7.31	37.14	54.00	-16.86	AVG
2	2390.000	47.34	-7.30	40.04	54.00	-13.96	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

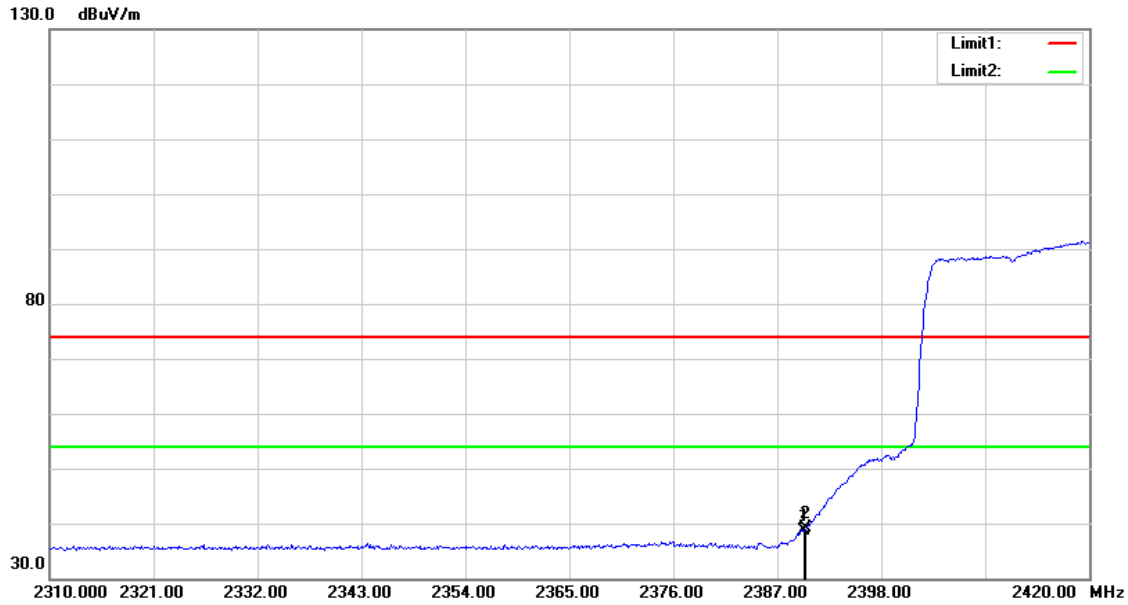


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.860	46.05	-7.30	38.75	54.00	-15.25	AVG
2	2390.000	46.38	-7.30	39.08	54.00	-14.92	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

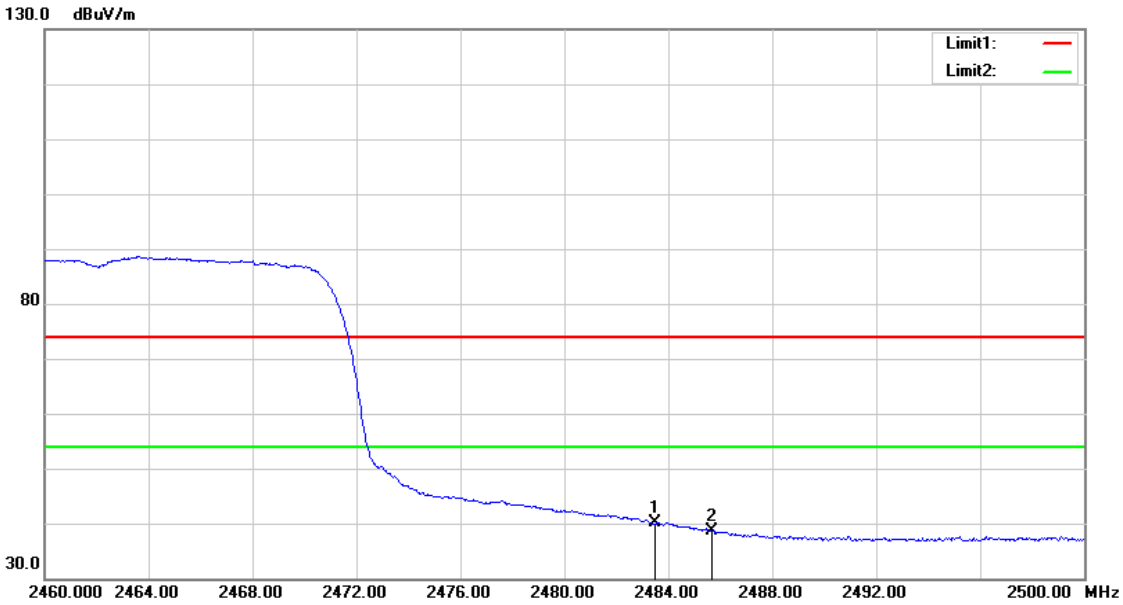


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	46.96	-6.94	40.02	54.00	-13.98	AVG
2	2485.680	45.59	-6.92	38.67	54.00	-15.33	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

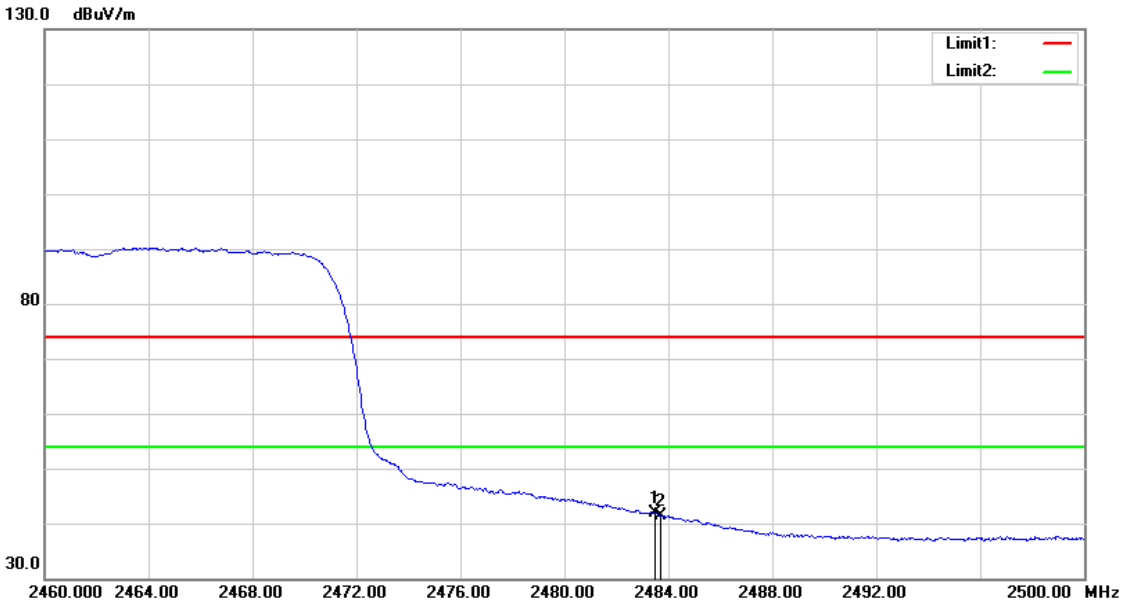


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	48.80	-6.94	41.86	54.00	-12.14	AVG
2	2483.680	48.38	-6.94	41.44	54.00	-12.56	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

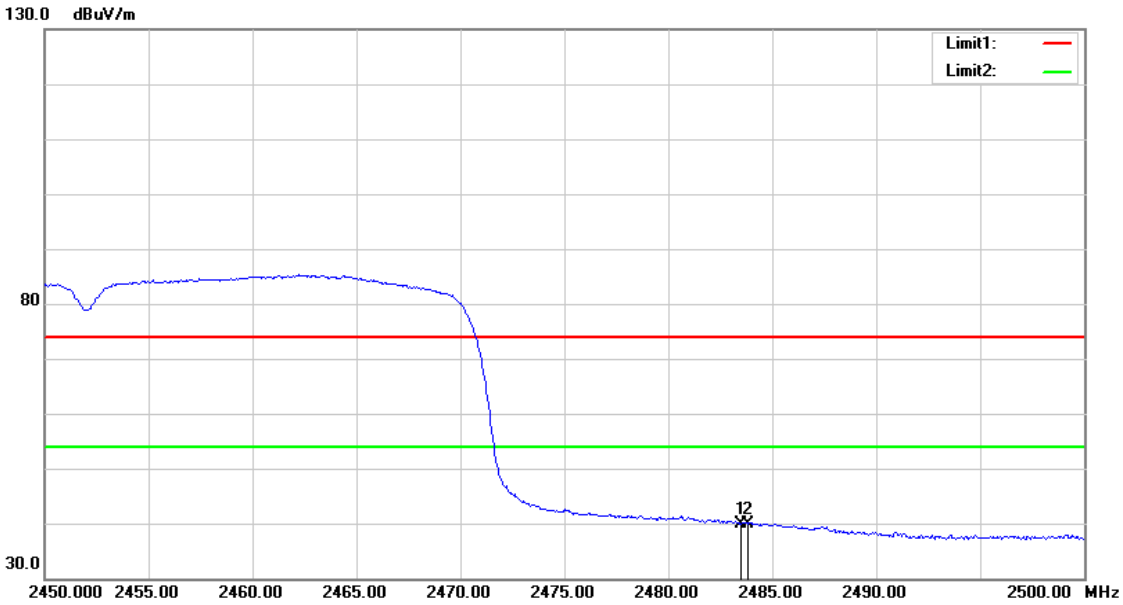


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	46.91	-6.94	39.97	54.00	-14.03	AVG
2	2483.850	46.92	-6.94	39.98	54.00	-14.02	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

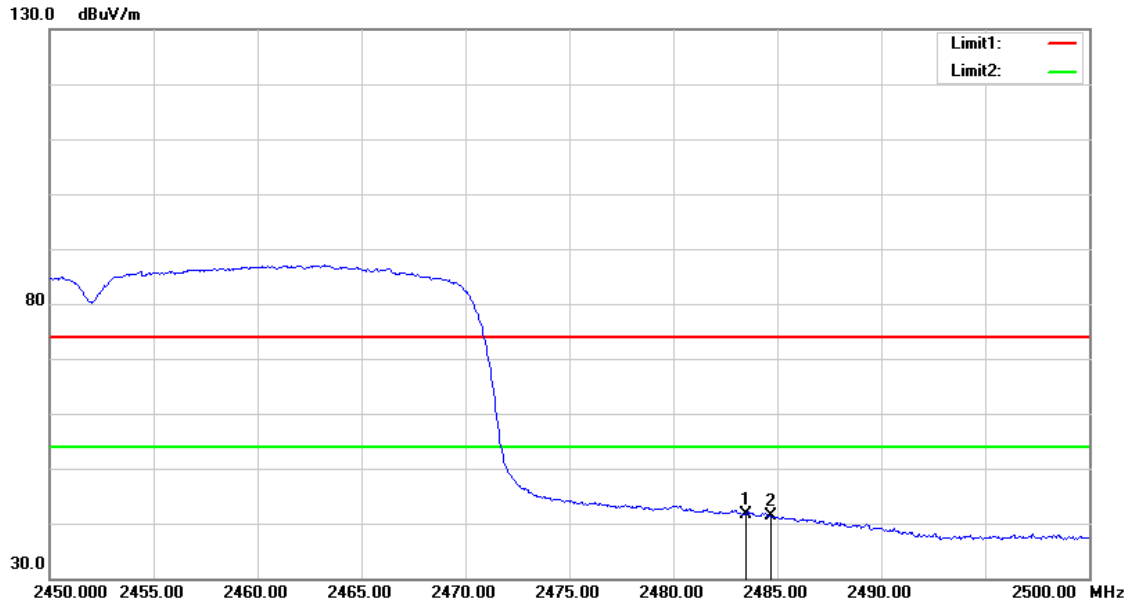

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	48.68	-6.94	41.74	54.00	-12.26	AVG
2	2484.700	48.26	-6.92	41.34	54.00	-12.66	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).




3.When the peak results are less than average limit, so not need to evaluate the average.




5.3 Conducted Test Results (2.4 GHz)




Maximum Conducted Output Power




Test Mode	Data Rate (Mbps)	Frequency (MHz)	ANT-0				Limit (dBm)
			Average Power		Peak Power		
			dBm	W	dBm	W	
Mode 2	1	2412	14.73	0.030	17.37	0.055	≤ 30.00
		2437	14.79	0.030	17.39	0.055	≤ 30.00
		2462	15.05	0.032	17.66	0.058	≤ 30.00
Mode 3	6	2412	9.00	0.008	16.13	0.041	≤ 30.00
		2437	16.86	0.049	23.56	0.227	≤ 30.00
		2462	8.35	0.007	15.48	0.035	≤ 30.00
Mode 4	6.5	2412	8.95	0.008	16.25	0.042	≤ 30.00
		2437	16.12	0.041	23.09	0.204	≤ 30.00
		2462	8.33	0.007	15.73	0.037	≤ 30.00
Mode 5	13.5	2422	7.21	0.005	14.37	0.027	≤ 30.00
		2437	16.05	0.040	22.89	0.195	≤ 30.00
		2452	7.25	0.005	14.53	0.028	≤ 30.00

Out of Band Conducted Spurious Emission

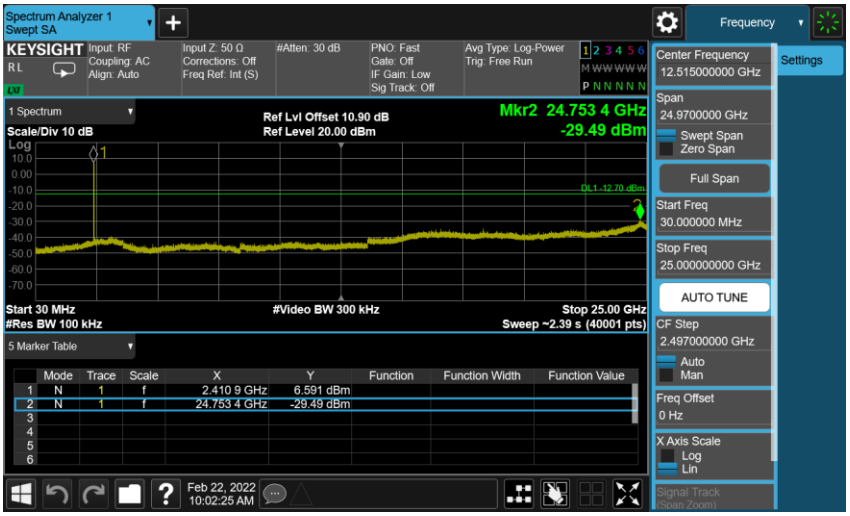
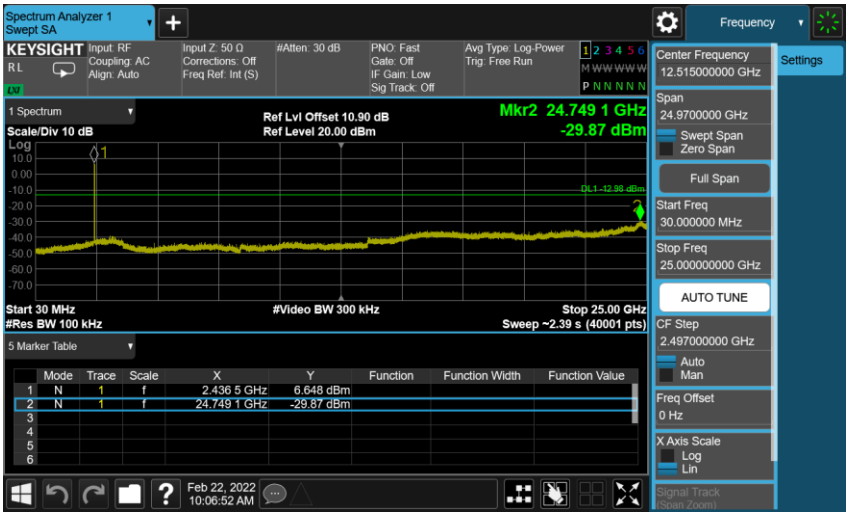
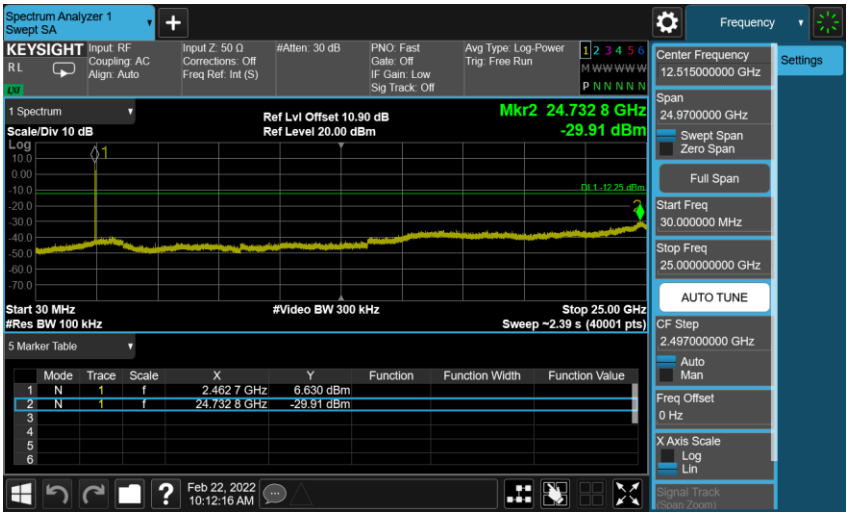
Mode 2: IEEE 802.11b Continuous TX Mode_ANT-0	
2412 MHz	
2437 MHz	
2462 MHz	

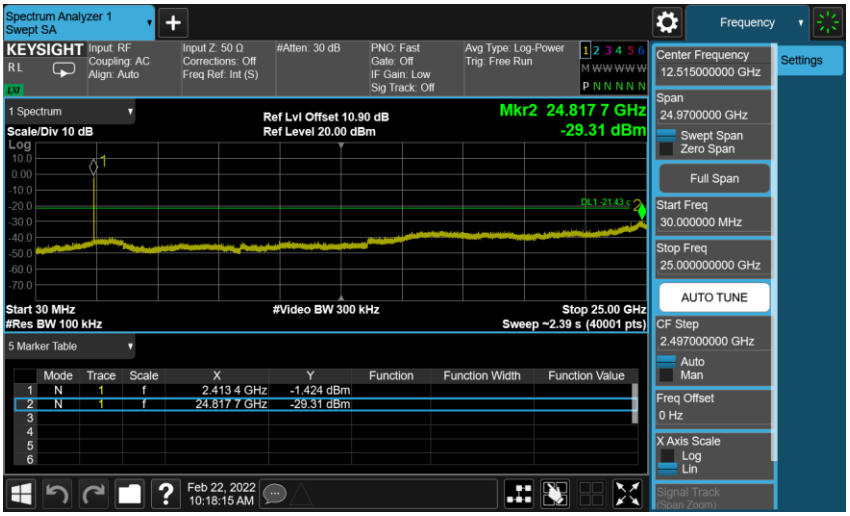
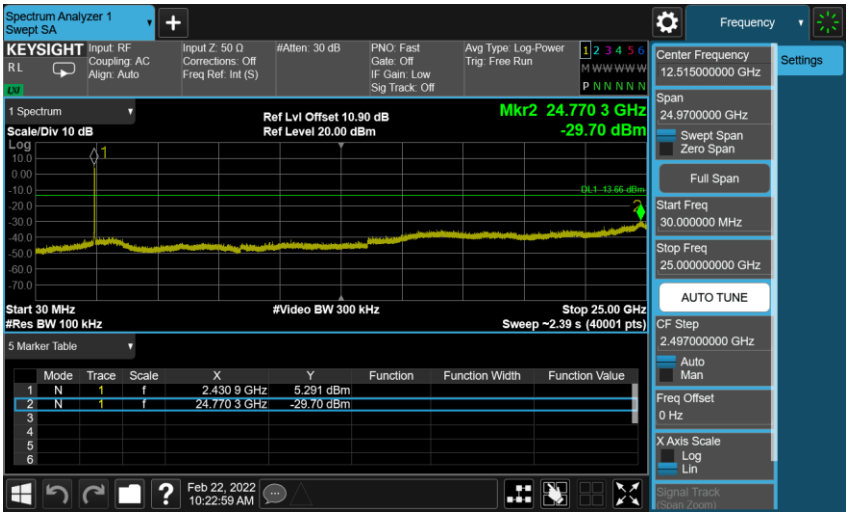
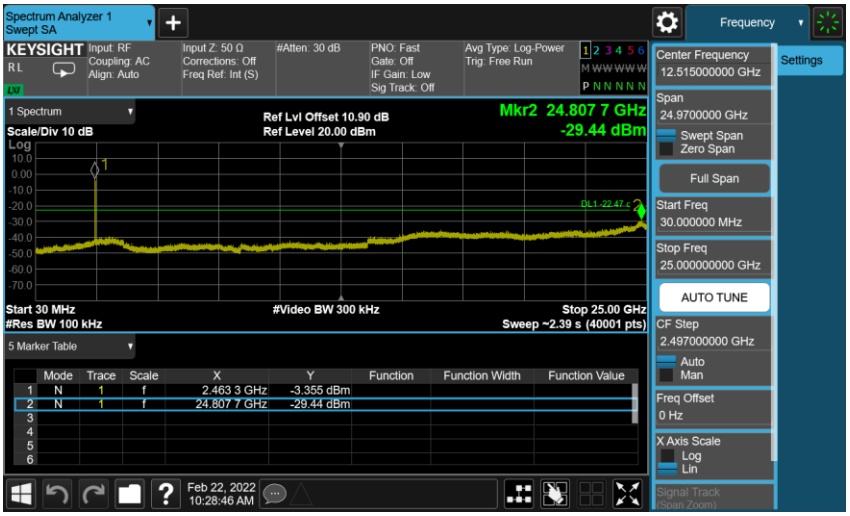
Mode 3: IEEE 802.11g Continuous TX Mode_ANT-0	
2412 MHz	
2437 MHz	
2462 MHz	

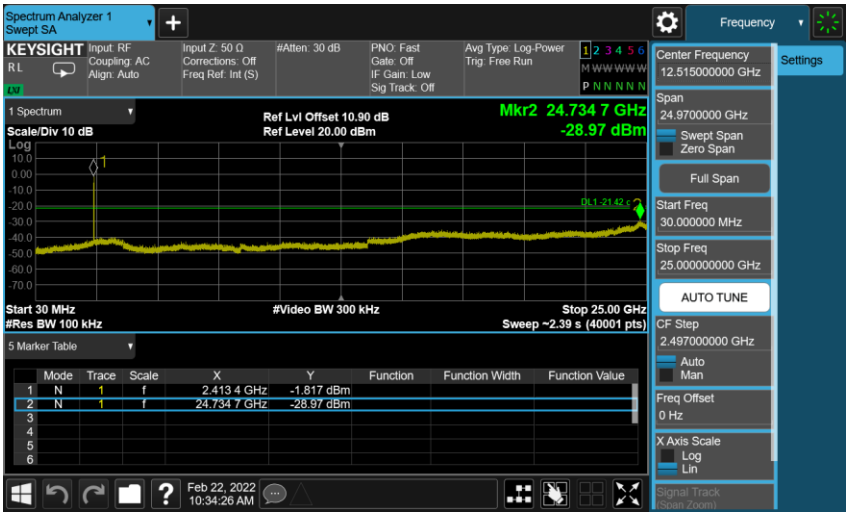
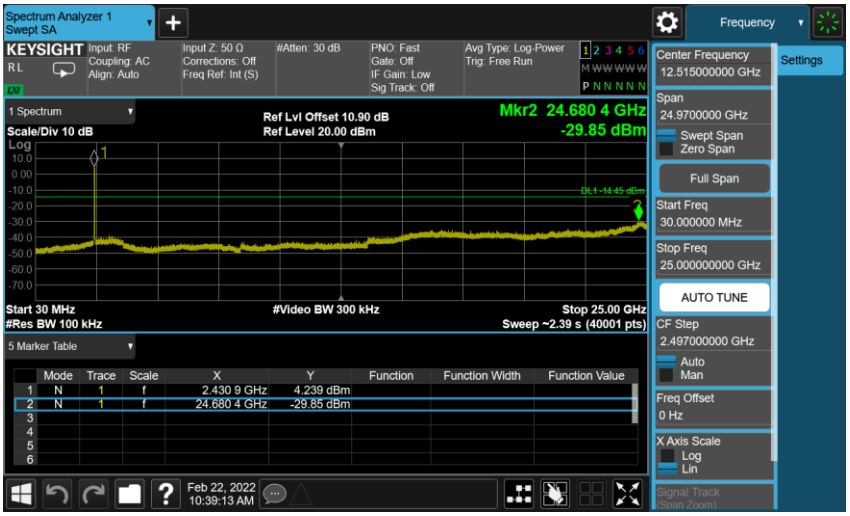
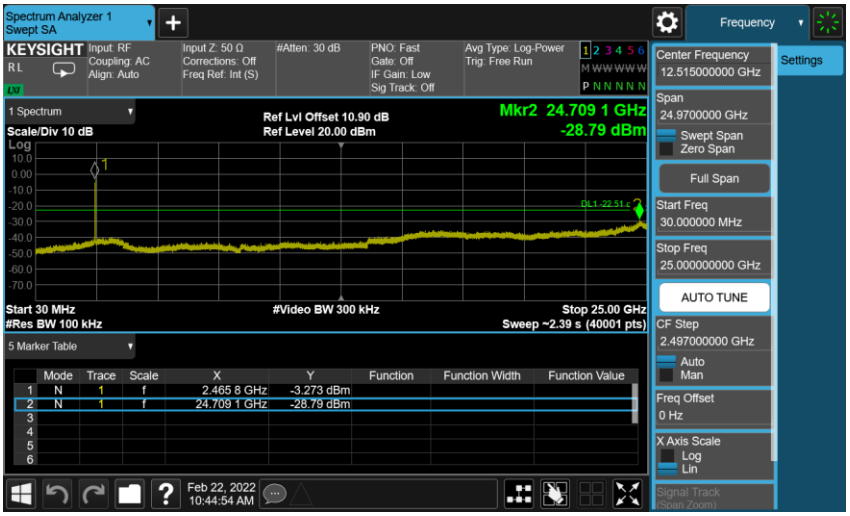
Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode_ANT-0	
2412 MHz	
2437 MHz	
2462 MHz	

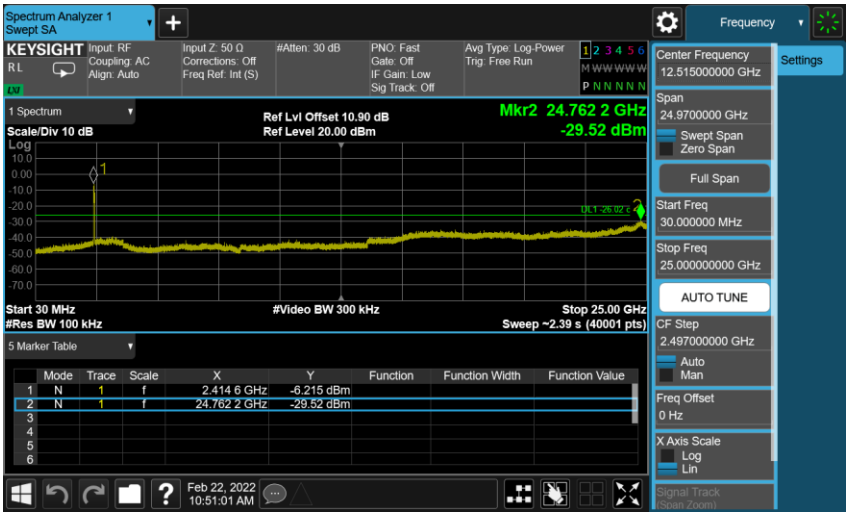
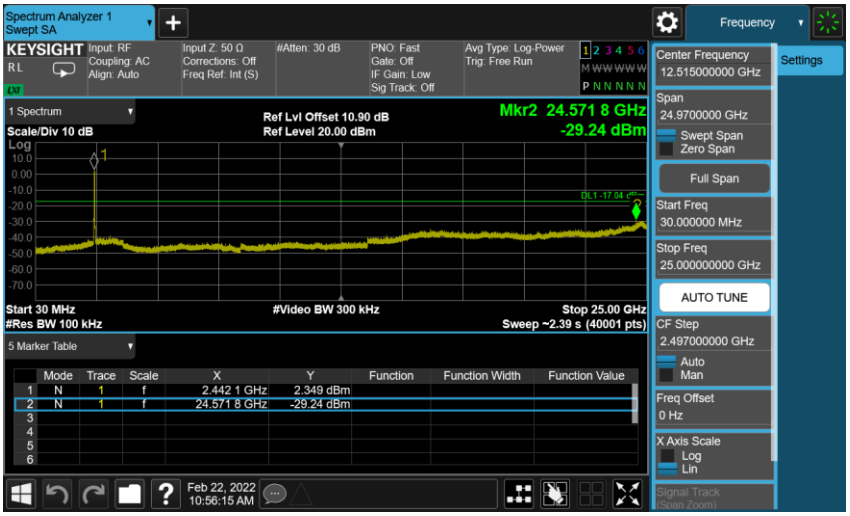
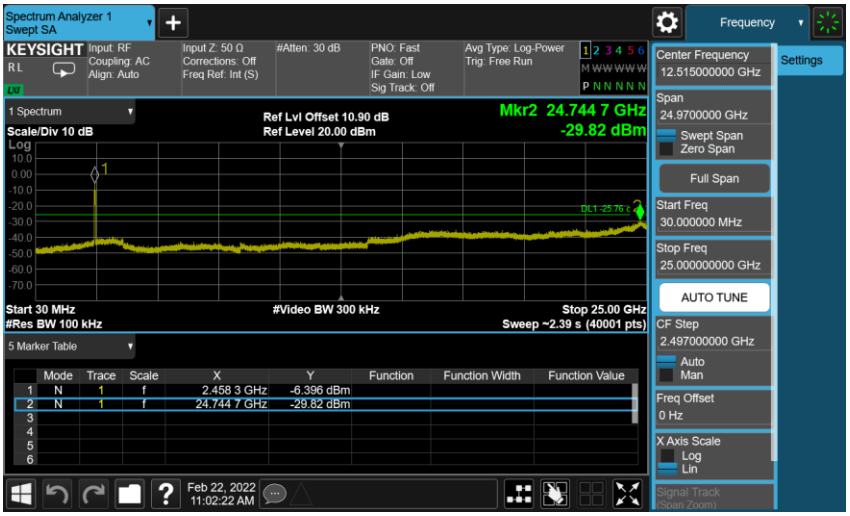
Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode_ANT-0	
2422 MHz	
2437 MHz	
2452 MHz	

Reference level

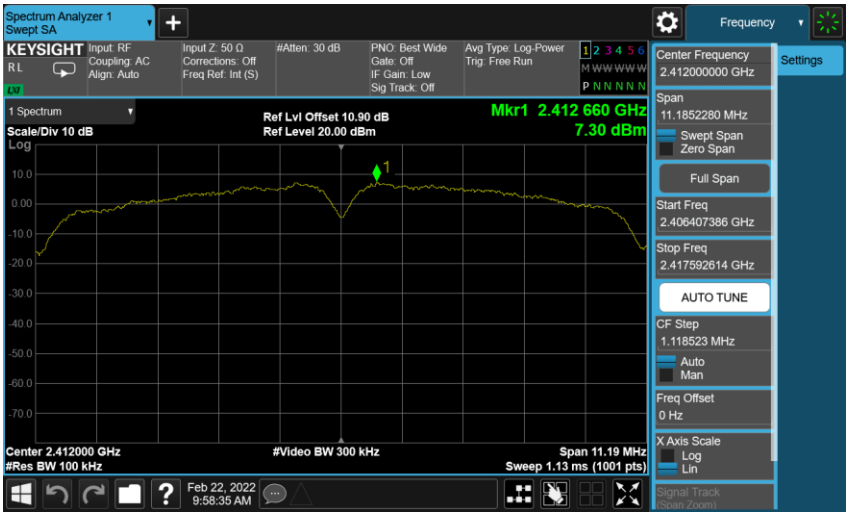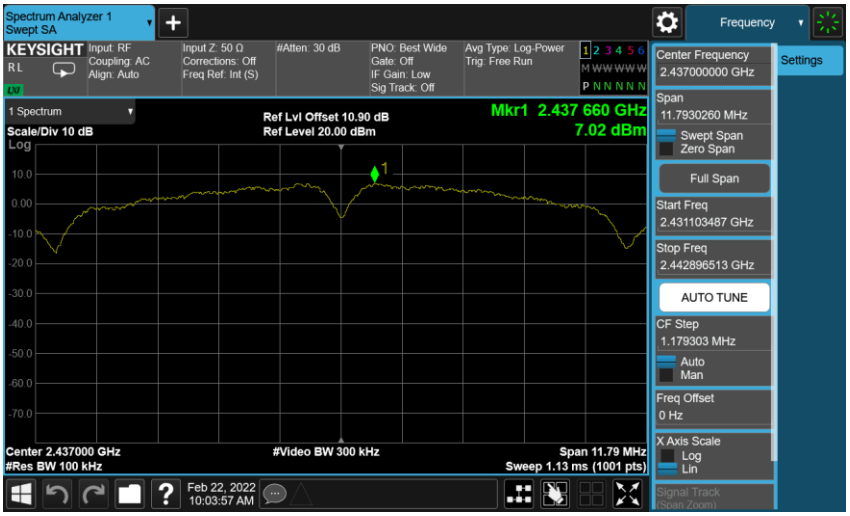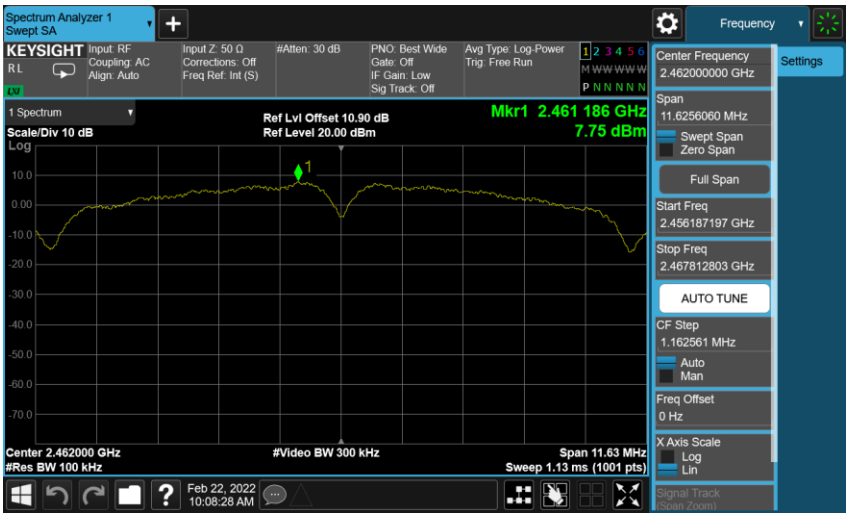
Mode 2: IEEE 802.11b Continuous TX Mode_ANT-0	
2412 MHz	
2437 MHz	
2462 MHz	

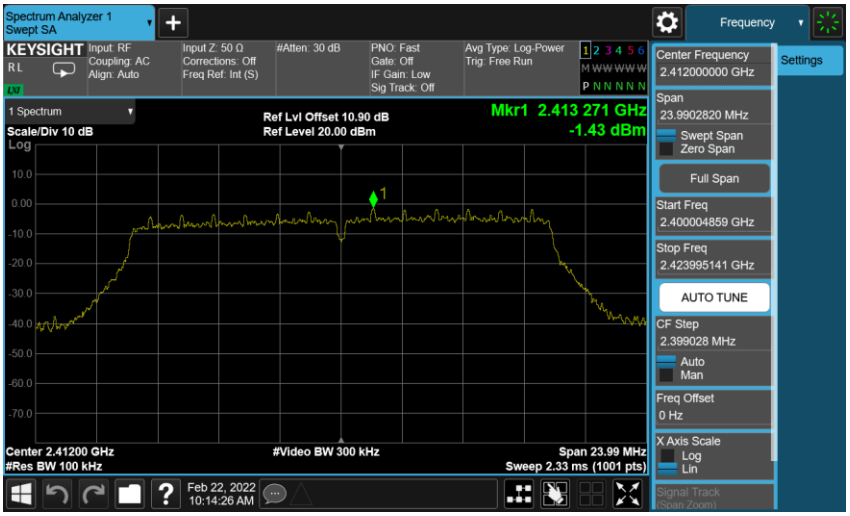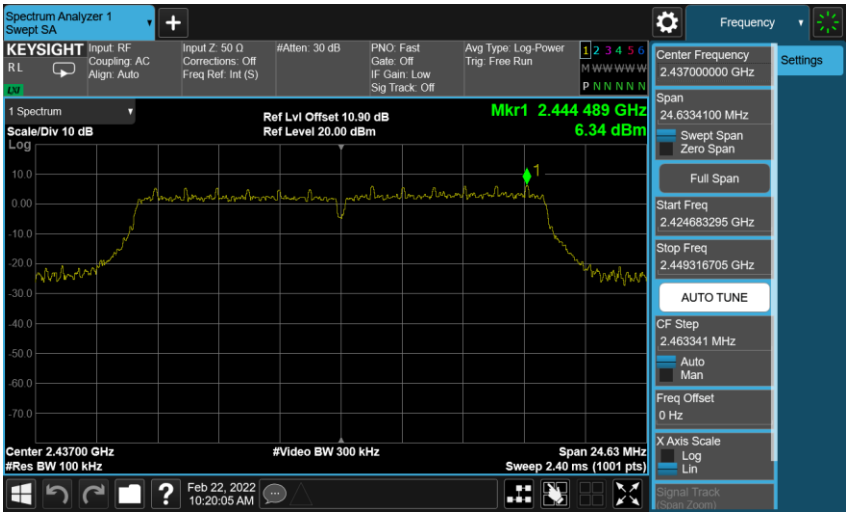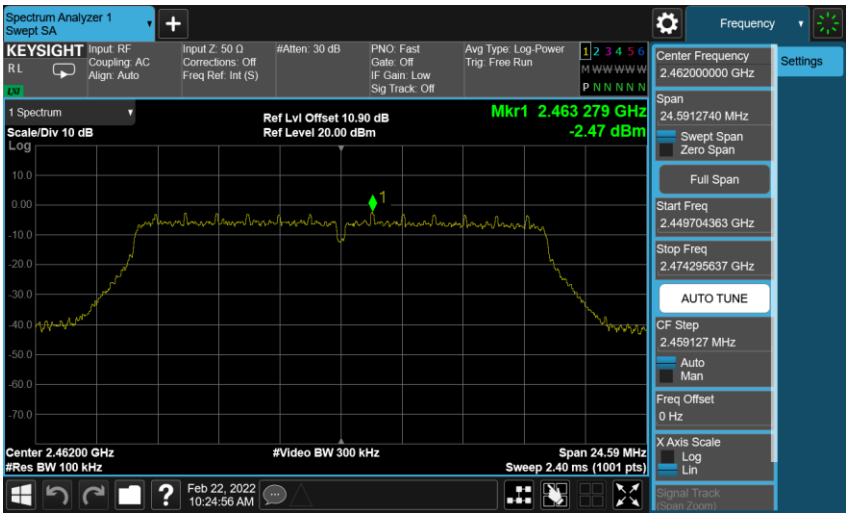
Mode 3: IEEE 802.11g Continuous TX Mode_ANT-0	
2412 MHz	
2437 MHz	
2462 MHz	

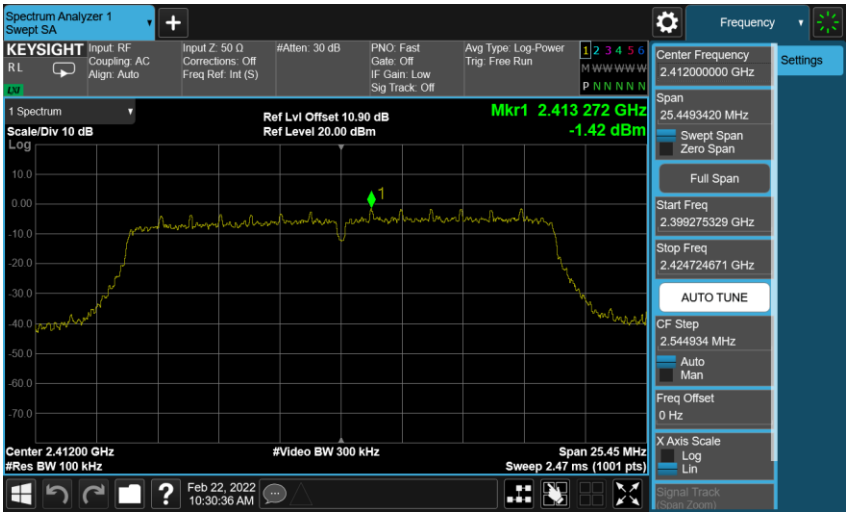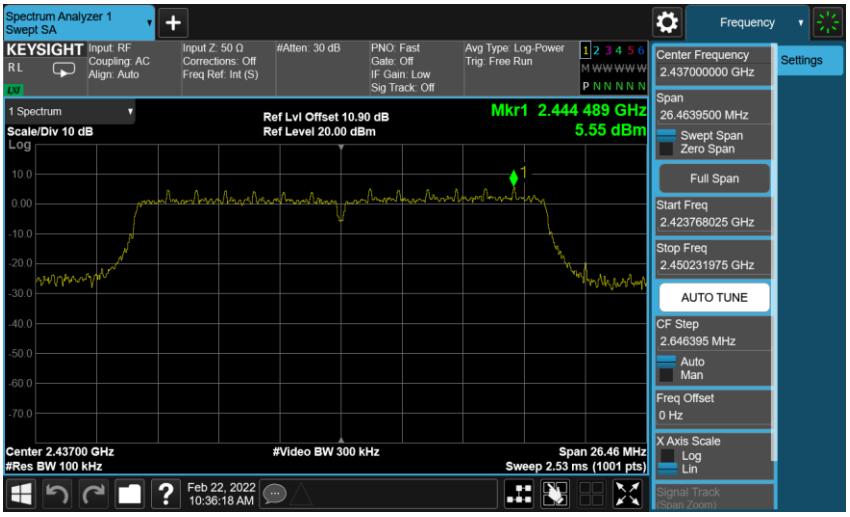
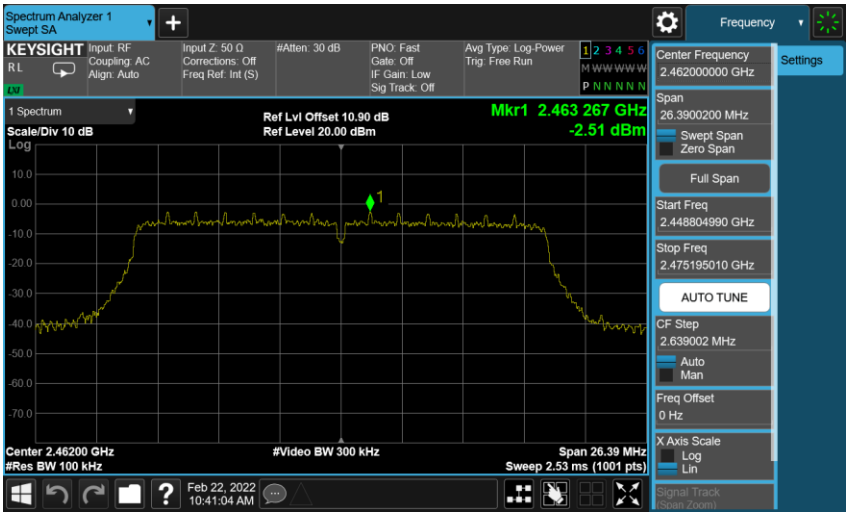
Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode_ANT-0	
2412 MHz	
2437 MHz	
2462 MHz	

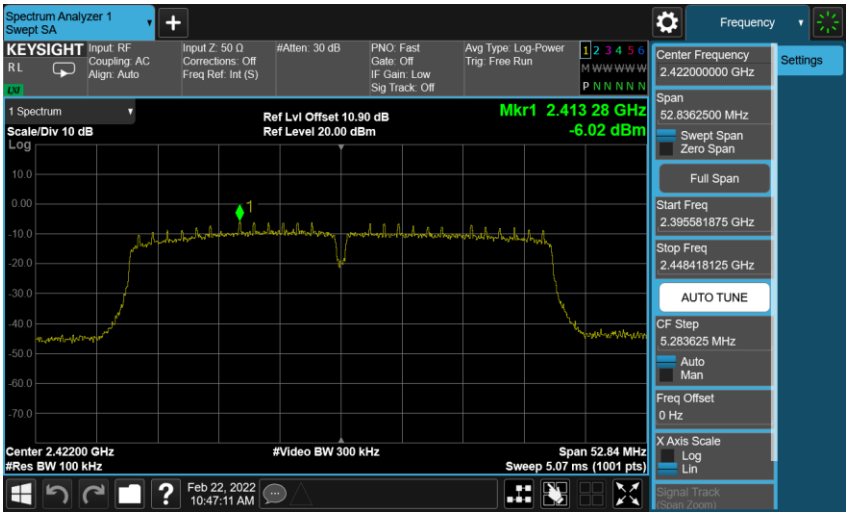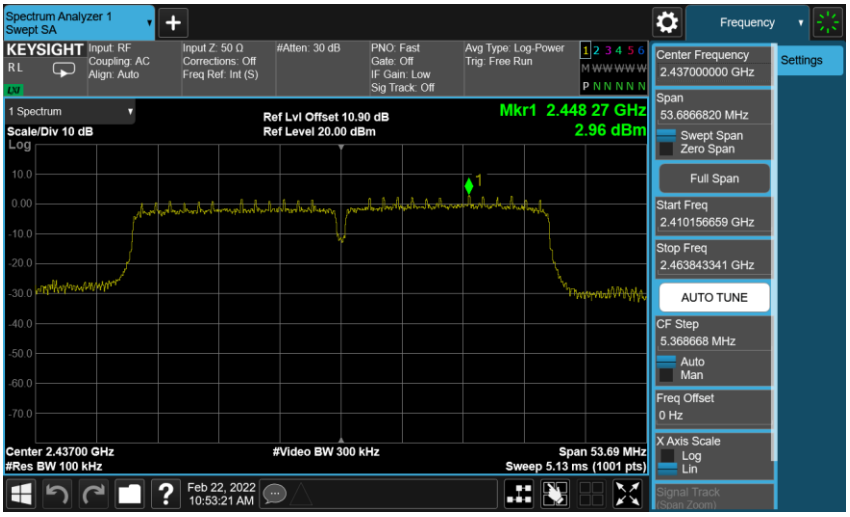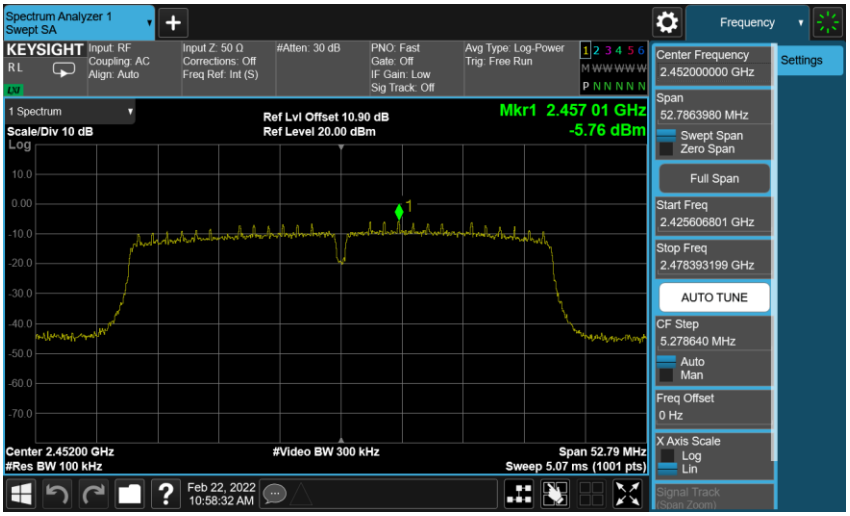
Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode_ANT-0	
2422 MHz	
2437 MHz	
2452 MHz	

Conducted Band Edge

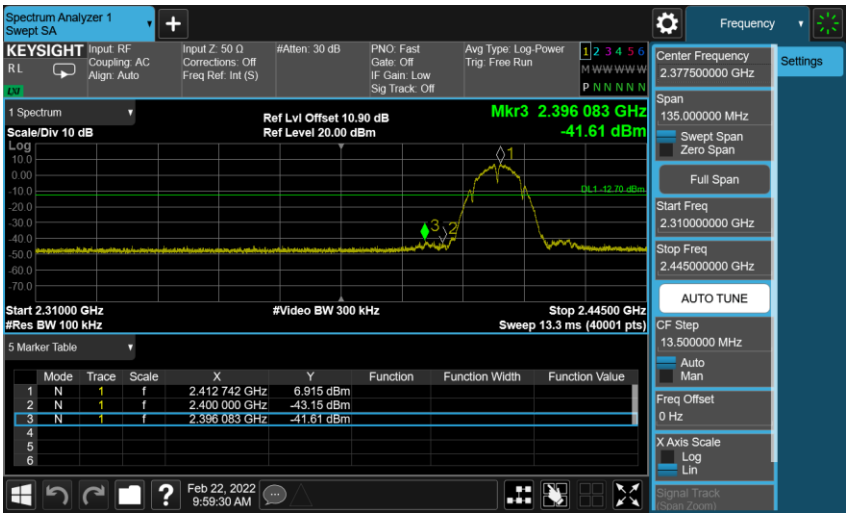Mode 2: IEEE 802.11b Continuous TX Mode_ANT-0	
2412 MHz	
2462 MHz	


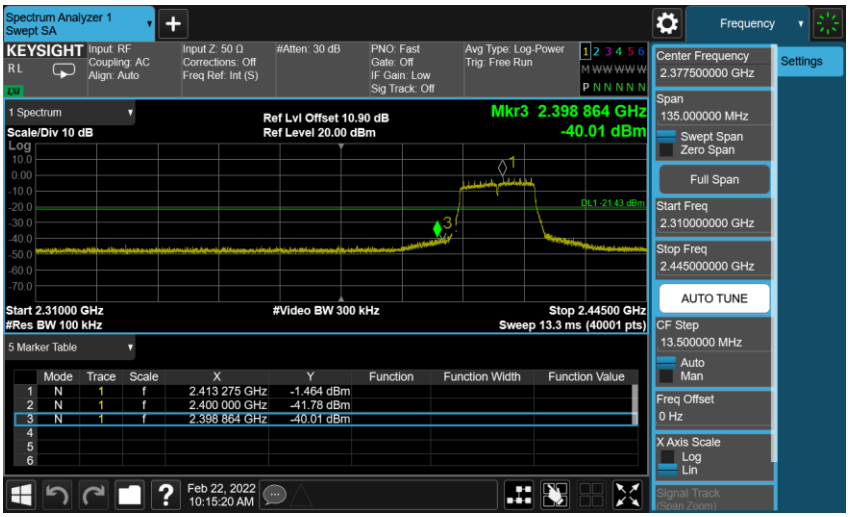
Mode 3: IEEE 802.11g Continuous TX Mode_ANT-0	
2412 MHz	
2462 MHz	


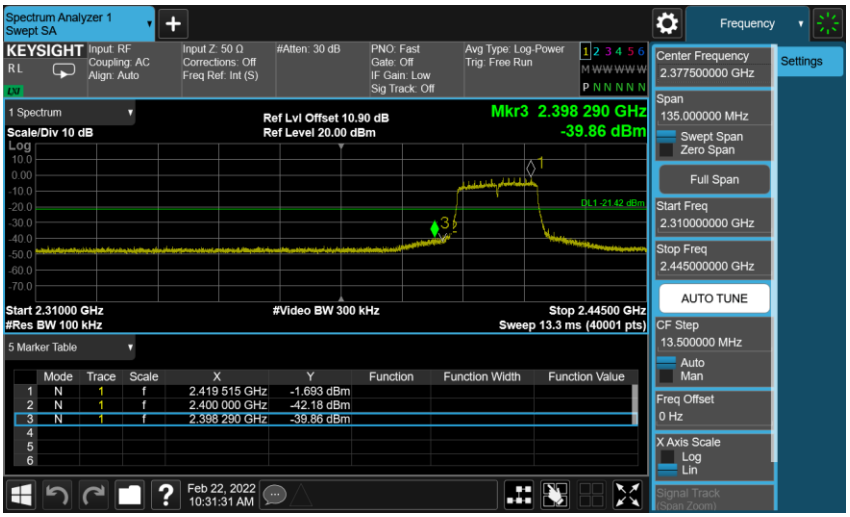
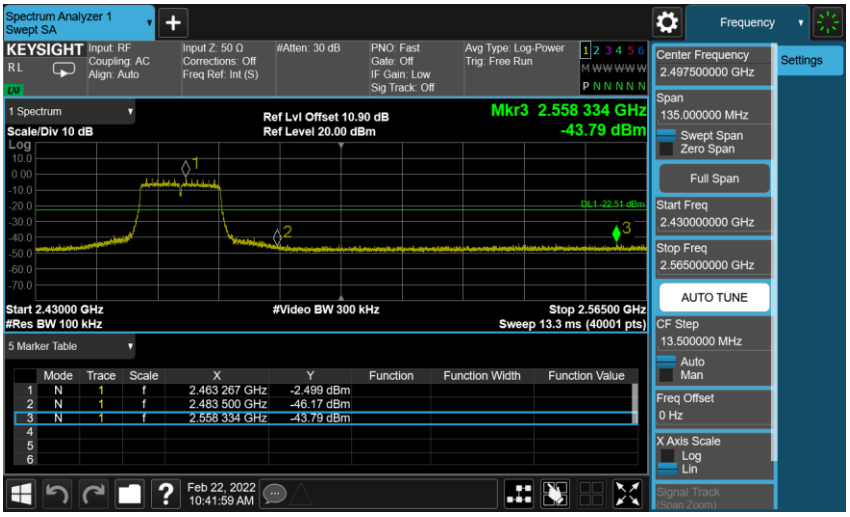
Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode_ANT-0	
2412 MHz	
2462 MHz	



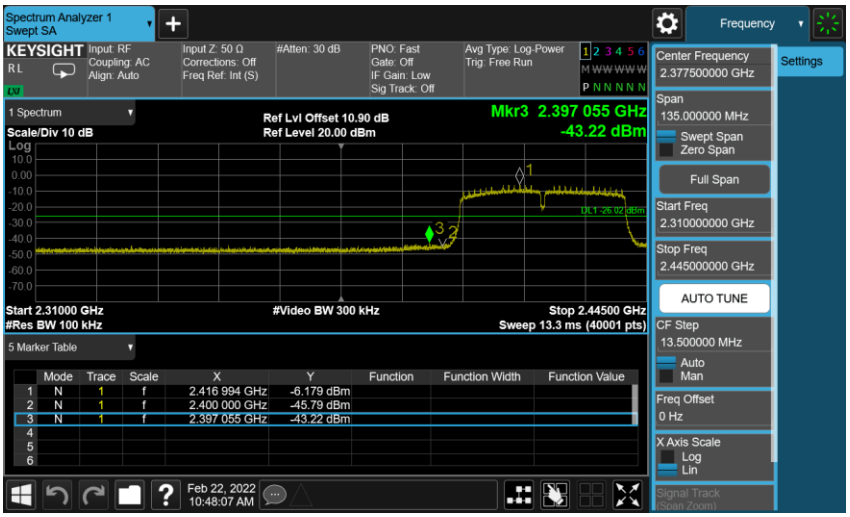
Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode_ANT-0	
2422 MHz	
2452 MHz	



6 dB Bandwidth

Test Mode	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
		ANT-0	
Mode 2	2412	7457	≥ 500
	2437	7862	≥ 500
	2462	7750	≥ 500
Mode 3	2412	15990	≥ 500
	2437	16420	≥ 500
	2462	16390	≥ 500
Mode 4	2412	16970	≥ 500
	2437	17640	≥ 500
	2462	17590	≥ 500
Mode 5	2422	35220	≥ 500
	2437	35790	≥ 500
	2452	35190	≥ 500

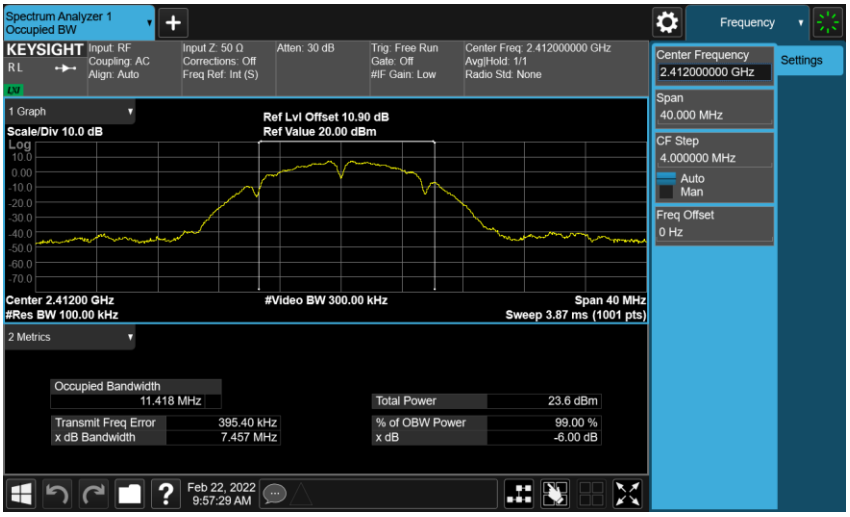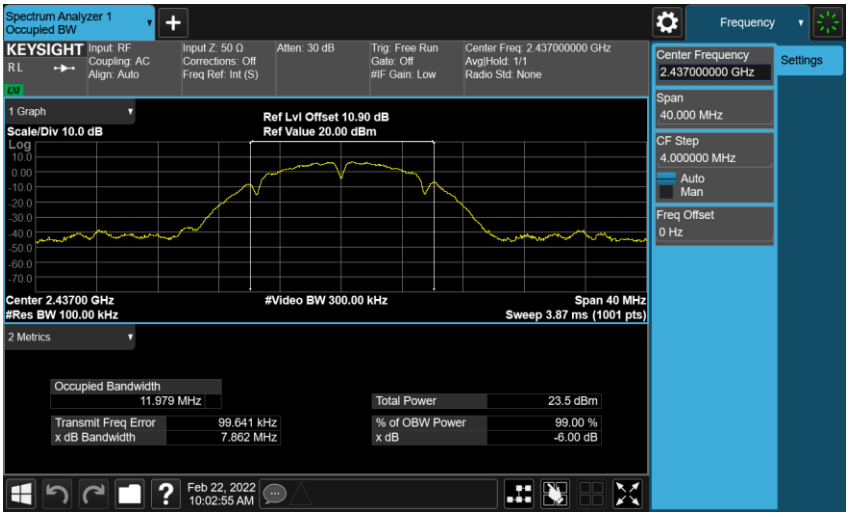Mode 2: IEEE 802.11b Continuous TX Mode_ANT-0	
2412 MHz	
2437 MHz	
2462 MHz	

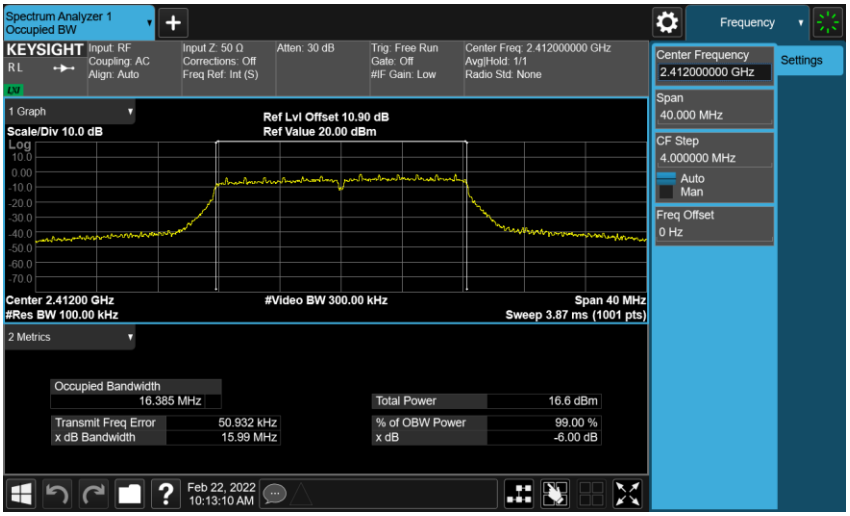
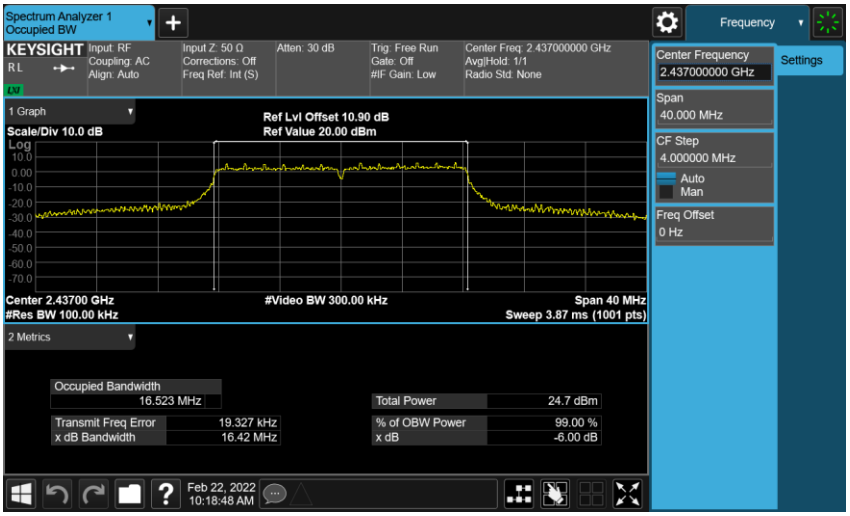
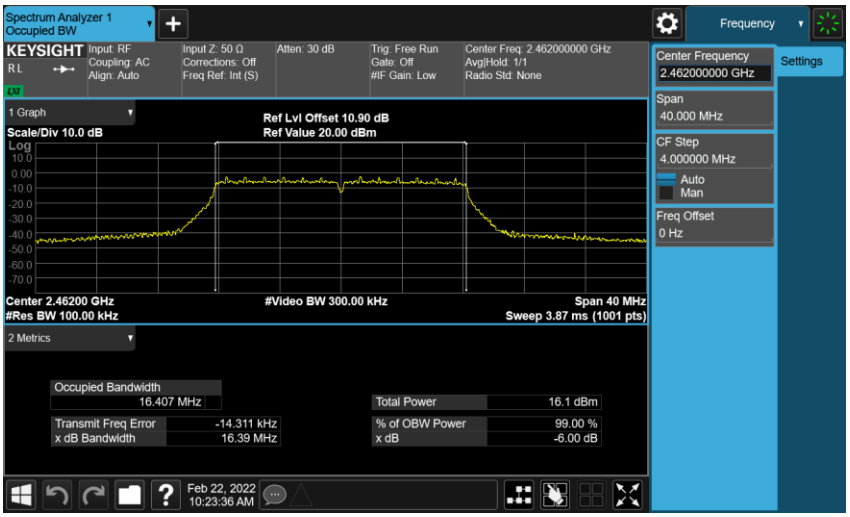
Mode 3: IEEE 802.11g Continuous TX Mode_ANT-0	
2412 MHz	
2437 MHz	
2462 MHz	

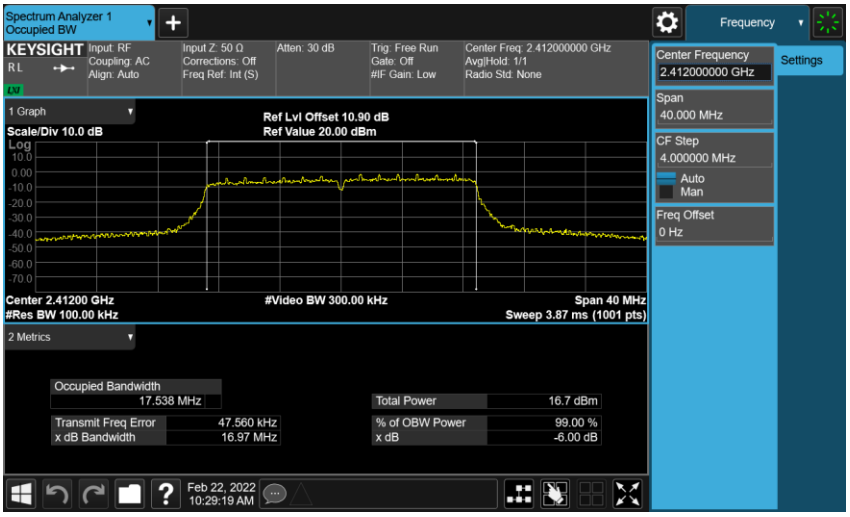
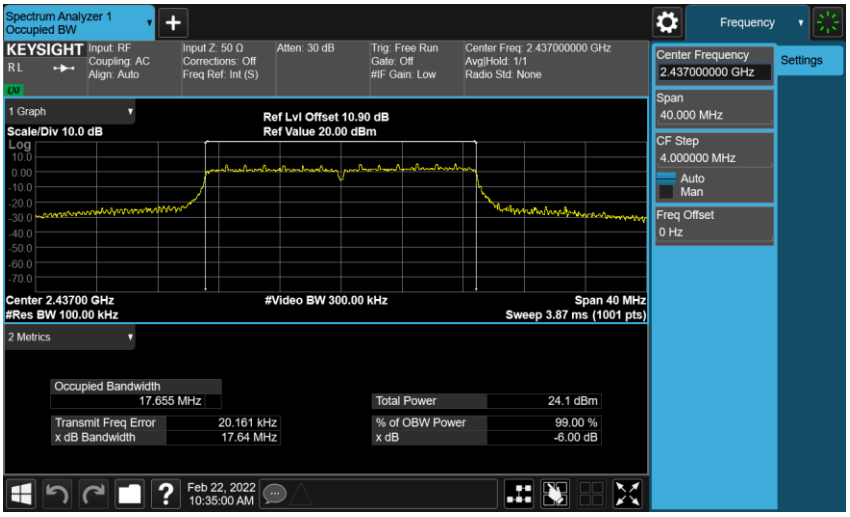
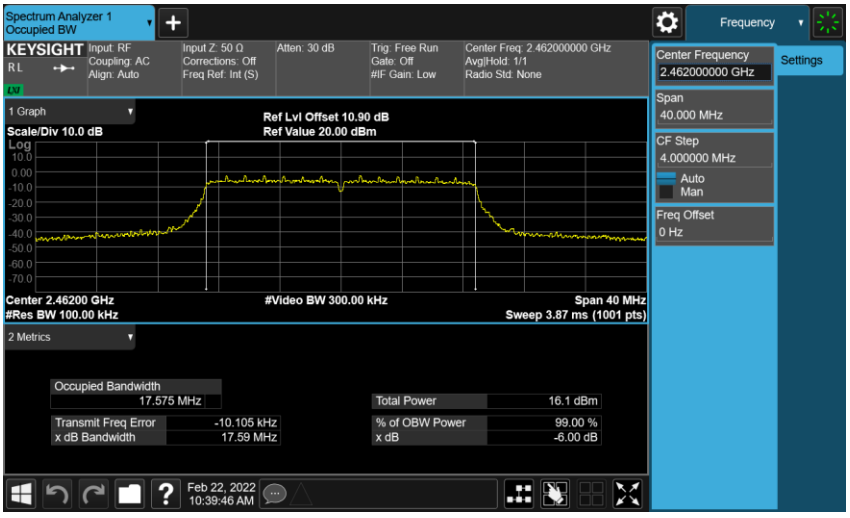
Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode_ANT-0	
2412 MHz	
2437 MHz	
2462 MHz	


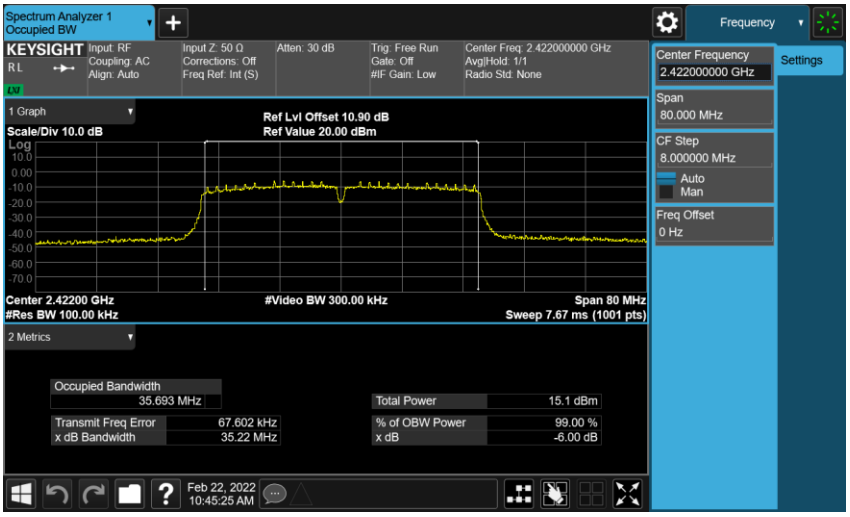
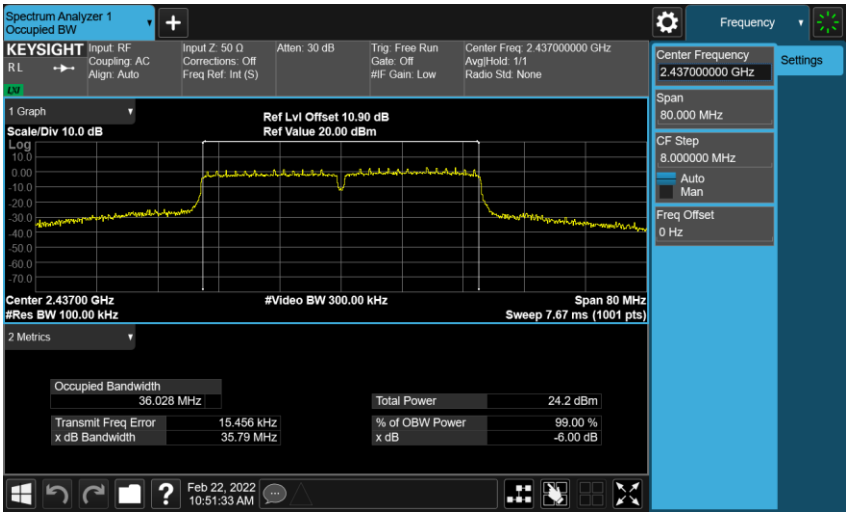
Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode_ANT-0	
2422 MHz	
2437 MHz	
2452 MHz	




Maximum Power Spectral Density

Test Mode	Frequency (MHz)	Measurement (dBm)	Limit (dBm/3 kHz)
		ANT-0	
Mode 2	2412	-7.090	≤ 8.00
	2437	-7.360	≤ 8.00
	2462	-6.000	≤ 8.00
Mode 3	2412	-14.120	≤ 8.00
	2437	-7.490	≤ 8.00
	2462	-16.610	≤ 8.00
Mode 4	2412	-14.950	≤ 8.00
	2437	-8.630	≤ 8.00
	2462	-16.570	≤ 8.00
Mode 5	2422	-20.390	≤ 8.00
	2437	-11.380	≤ 8.00
	2452	-20.100	≤ 8.00

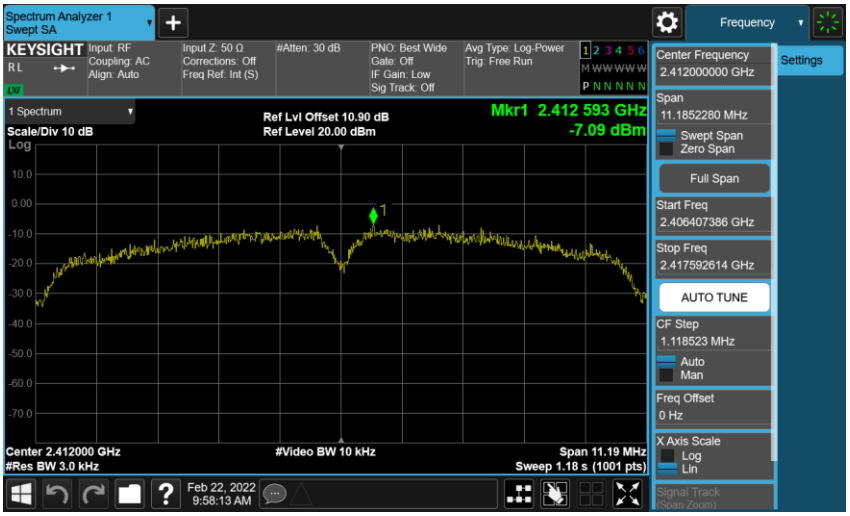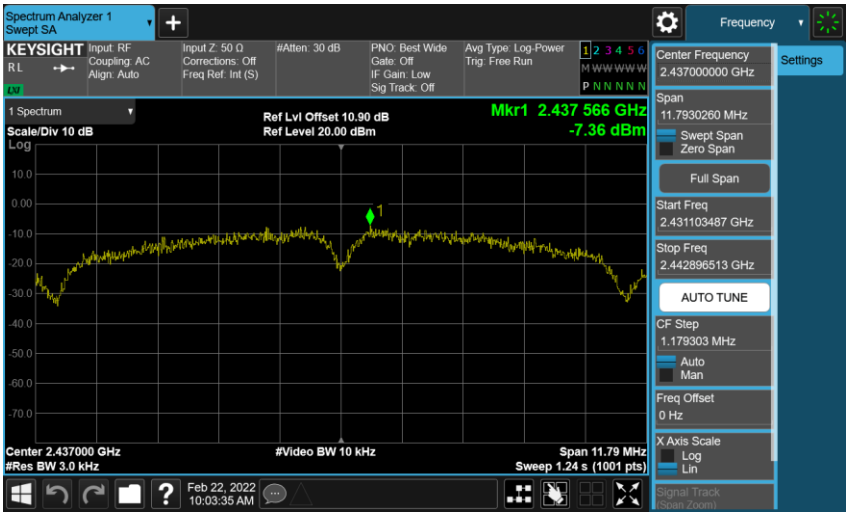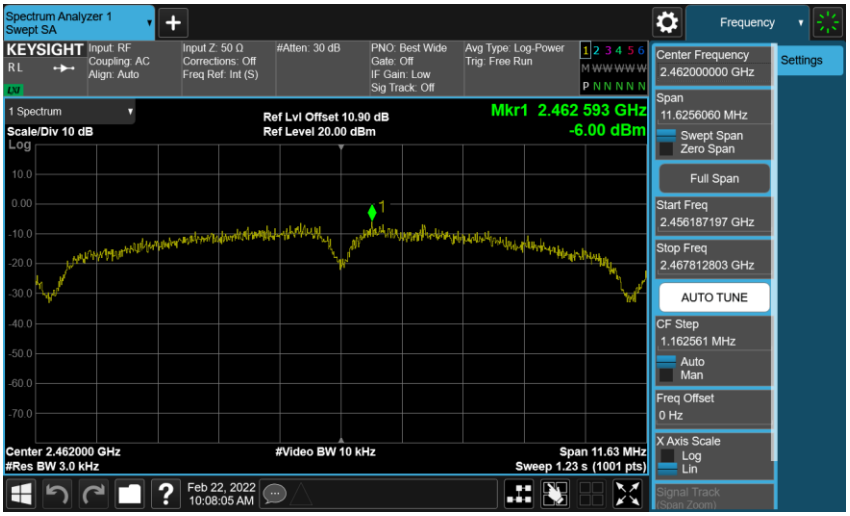Mode 2: IEEE 802.11b Continuous TX Mode_ANT-0	
2412 MHz	
2437 MHz	
2462 MHz	

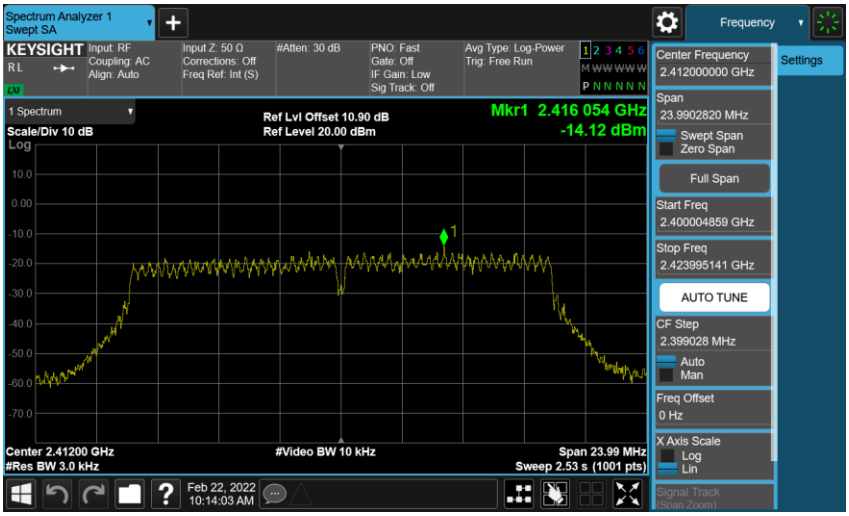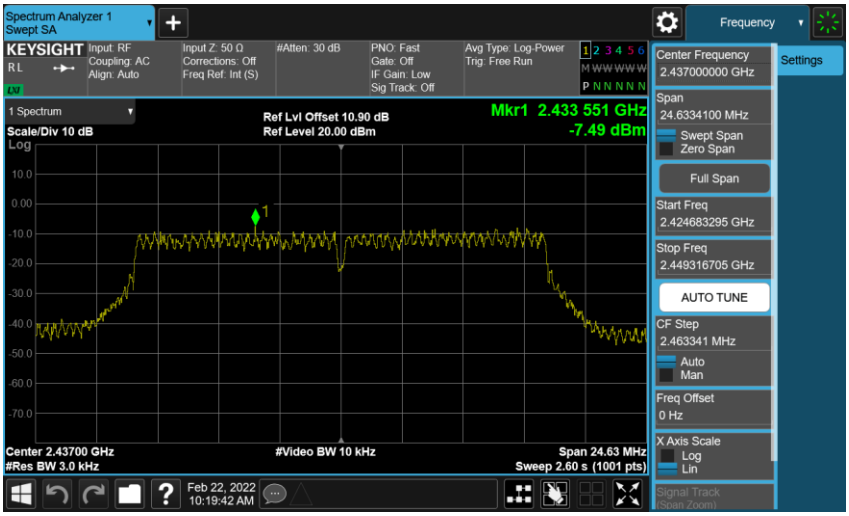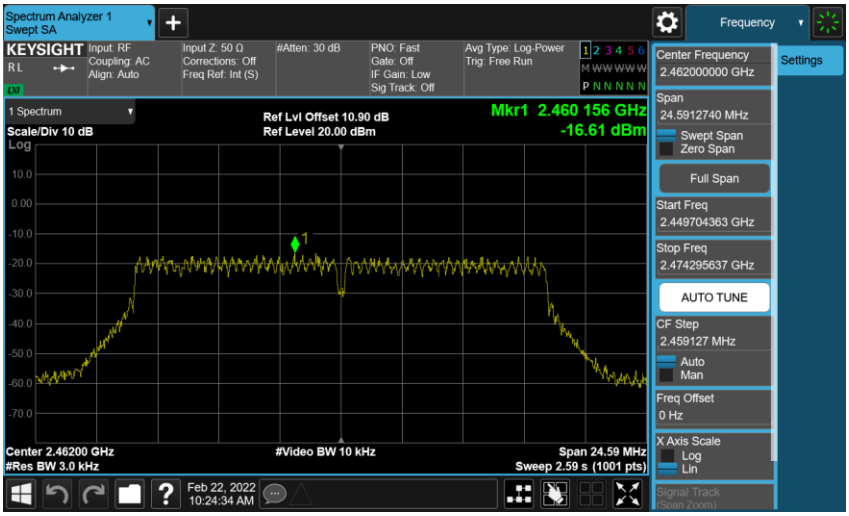Mode 3: IEEE 802.11g Continuous TX Mode_ANT-0	
2412 MHz	
2437 MHz	
2462 MHz	

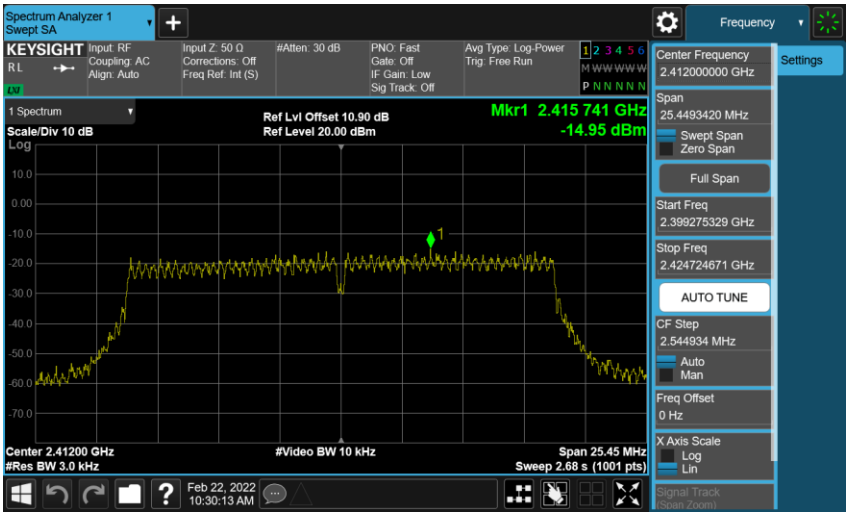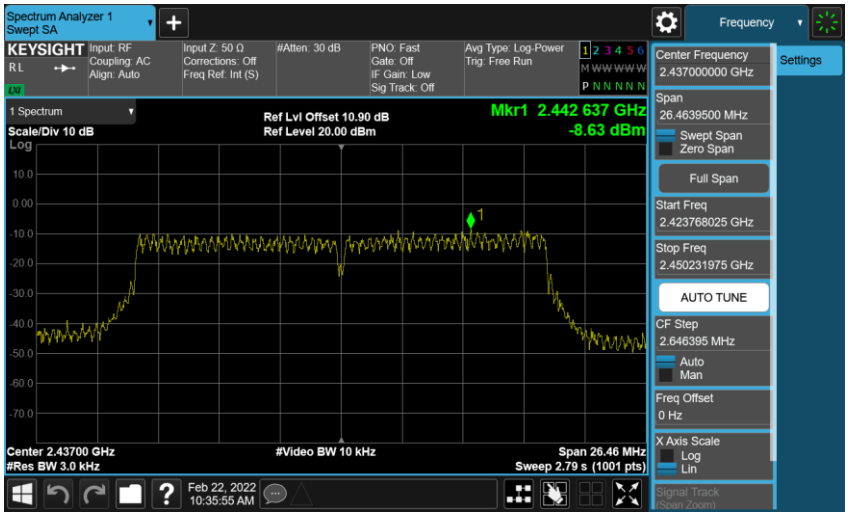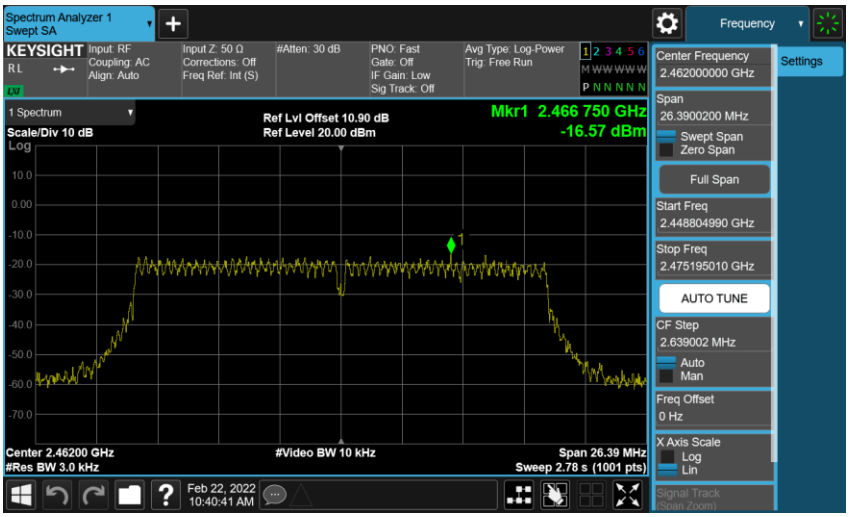
Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode_ANT-0	
2412 MHz	
2437 MHz	
2462 MHz	

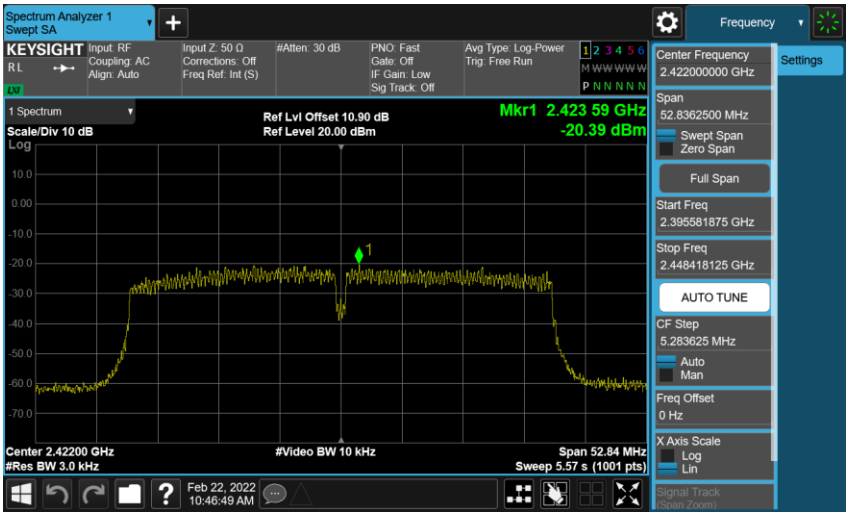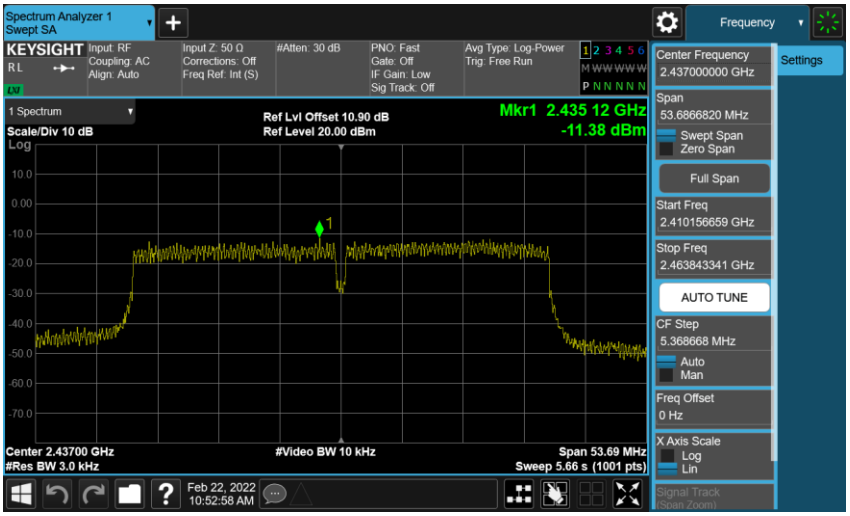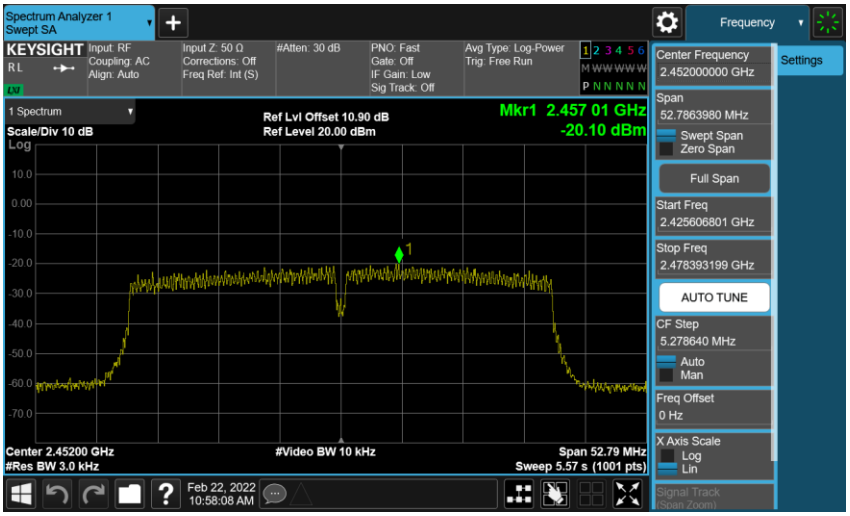Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode_ANT-0	
2422 MHz	
2437 MHz	
2452 MHz	

5.4 Radiated Emission Measurement (5 GHz)

其它不必要之訊號 (1 GHz 以下)

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Mode:	Mode 1		
Ant.Polar.:	Horizontal		

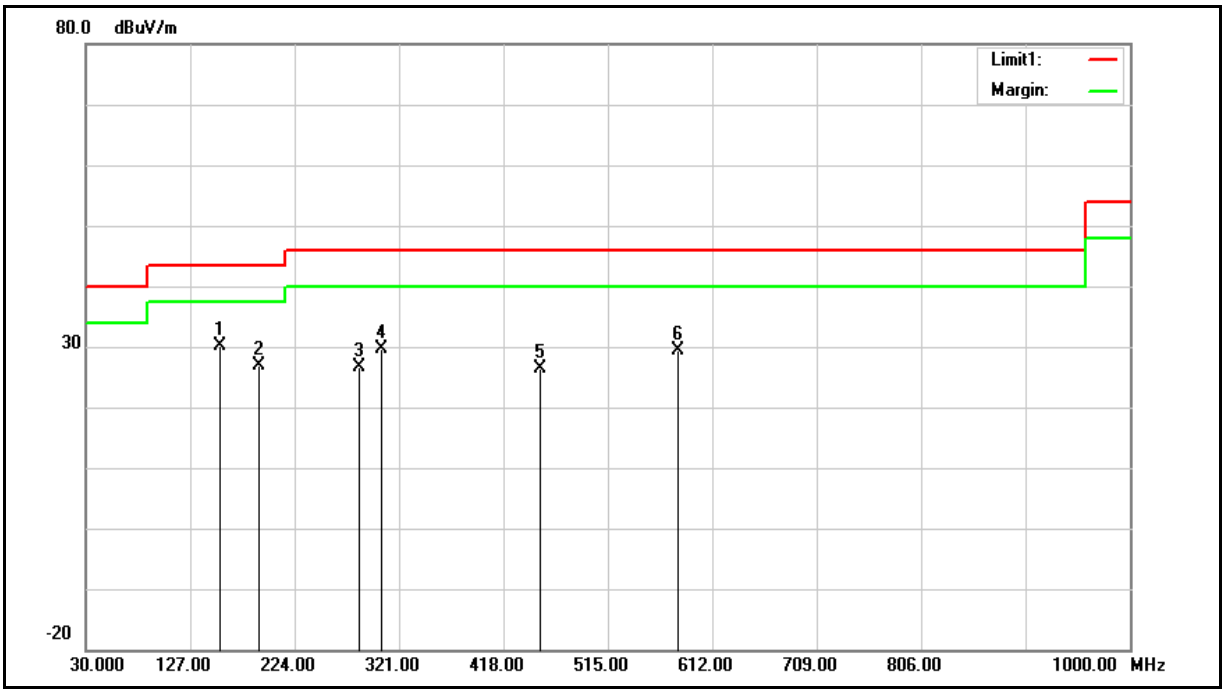


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	155.1300	30.06	0.00	30.06	43.50	-13.44	QP
2	191.0200	26.99	0.00	26.99	43.50	-16.51	QP
3	284.1400	26.69	0.00	26.69	46.00	-19.31	QP
4	304.5100	29.61	0.00	29.61	46.00	-16.39	QP
5	451.9500	26.34	0.00	26.34	46.00	-19.66	QP
6	579.9900	29.34	0.00	29.34	46.00	-16.66	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Mode:	Mode 1		
Ant.Polar.:	Vertical		

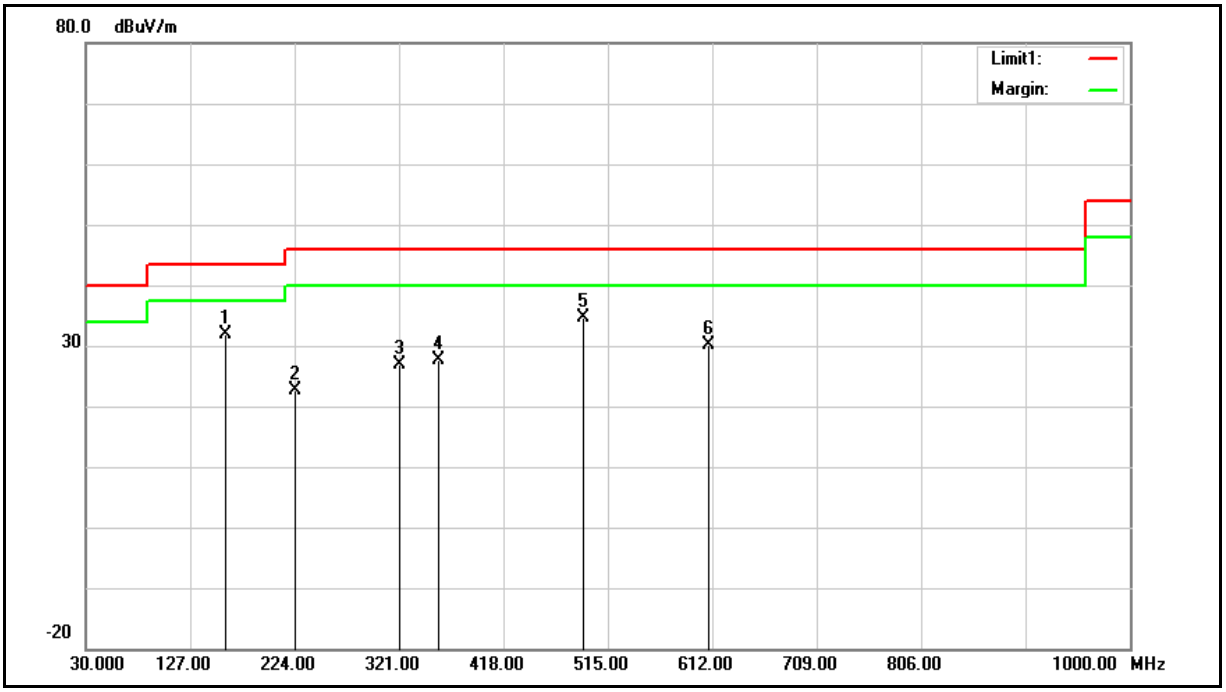

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	159.9800	31.80	0.00	31.80	43.50	-11.70	QP
2	224.9700	31.00	-8.32	22.68	46.00	-23.32	QP
3	321.9700	32.36	-5.48	26.88	46.00	-19.12	QP
4	357.8600	32.31	-4.70	27.61	46.00	-18.39	QP
5	491.7200	36.55	-1.96	34.59	46.00	-11.41	QP
6	608.1200	29.04	1.04	30.08	46.00	-15.92	QP


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

場強輻射量測 (1 GHz 以上)

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

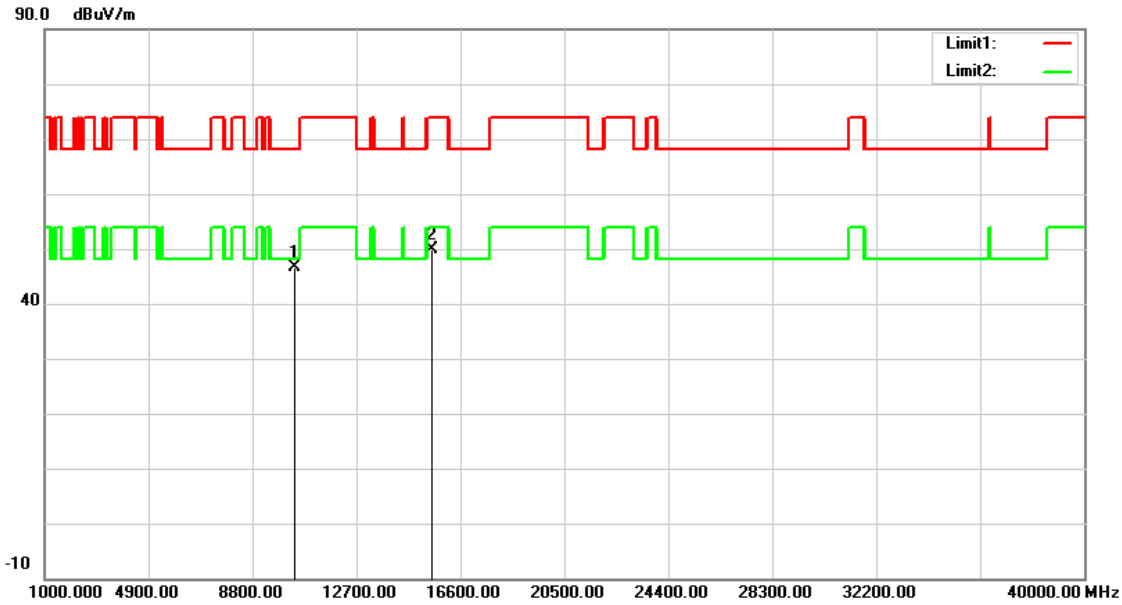


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	32.45	14.29	46.74	68.20	-21.46	peak
2	15540.000	33.02	16.86	49.88	74.00	-24.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

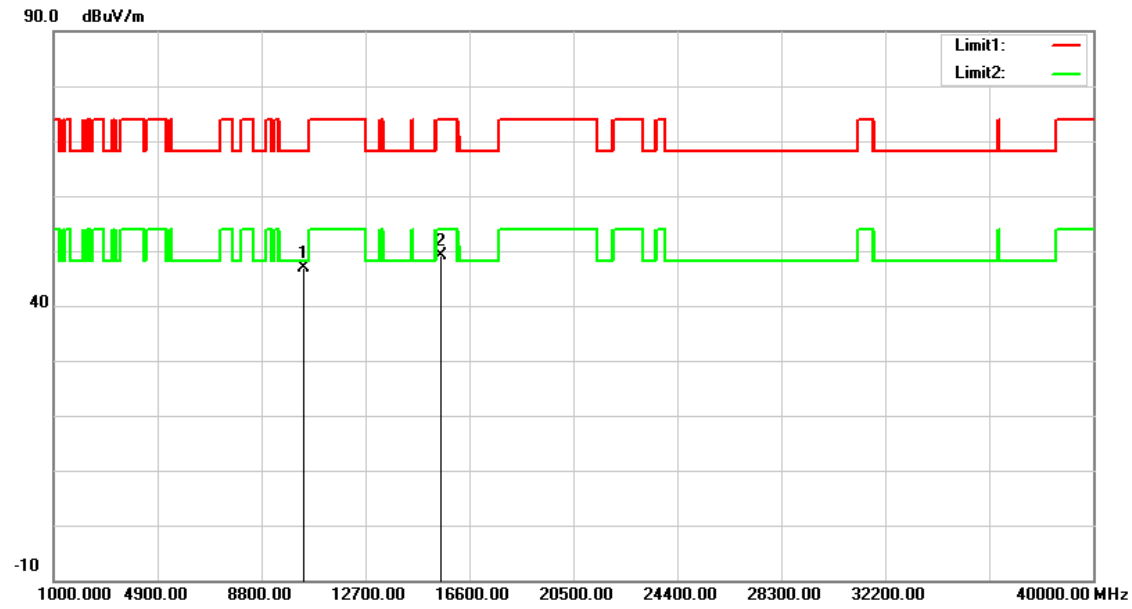


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	32.66	14.29	46.95	68.20	-21.25	peak
2	15540.000	32.34	16.86	49.20	74.00	-24.80	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

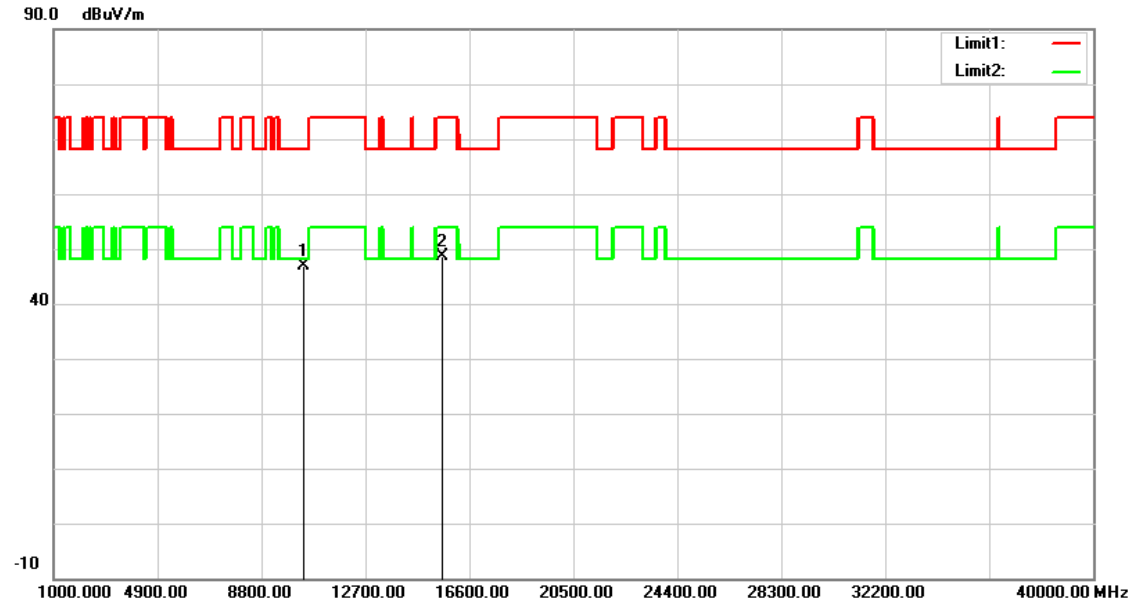


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	32.57	14.38	46.95	68.20	-21.25	peak
2	15600.000	32.09	16.65	48.74	74.00	-25.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

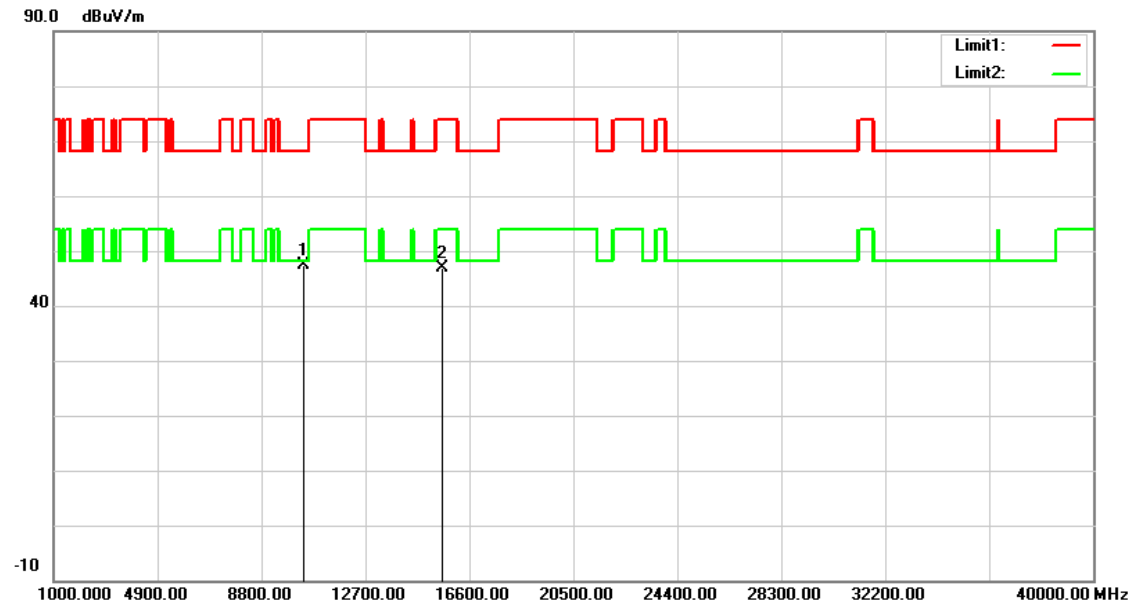


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	32.93	14.38	47.31	68.20	-20.89	peak
2	15600.000	30.30	16.65	46.95	74.00	-27.05	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

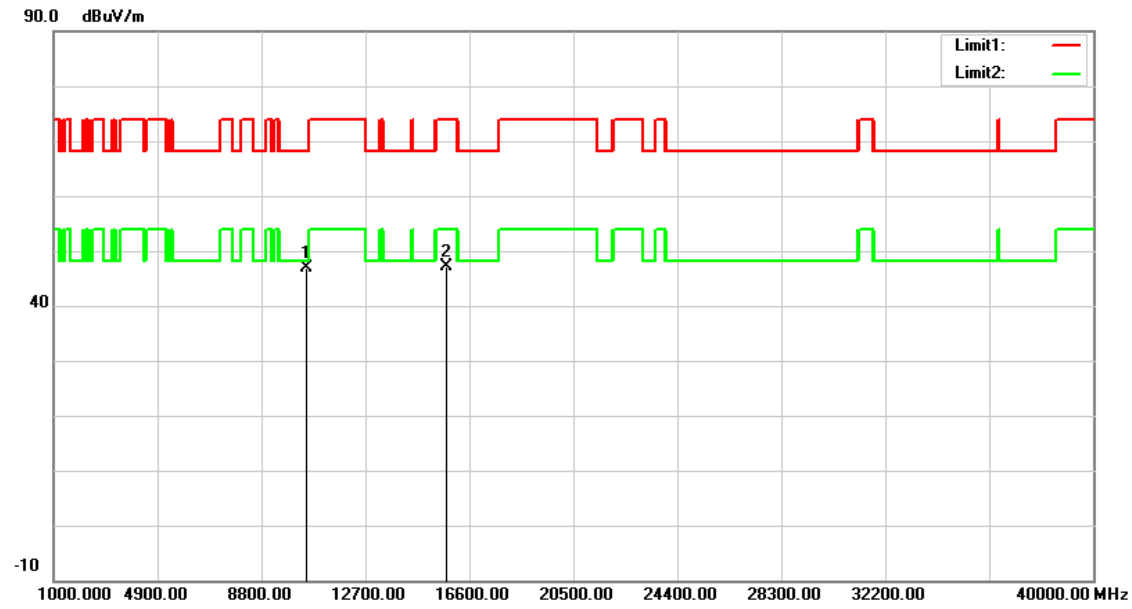


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	32.40	14.55	46.95	68.20	-21.25	peak
2	15720.000	30.94	16.24	47.18	74.00	-26.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

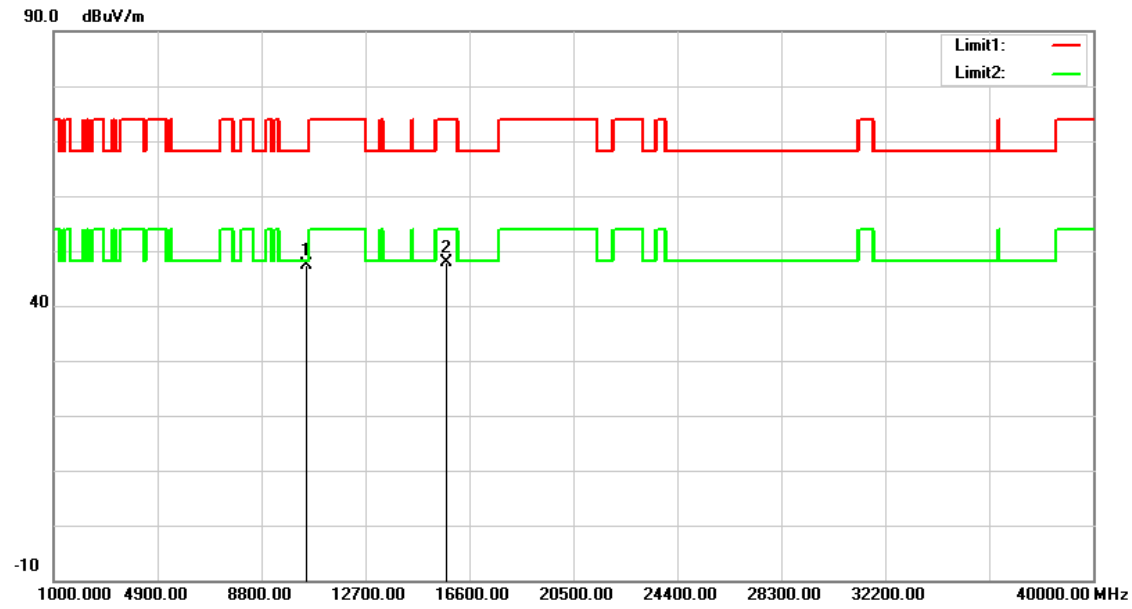


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	32.91	14.55	47.46	68.20	-20.74	peak
2	15720.000	31.61	16.24	47.85	74.00	-26.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

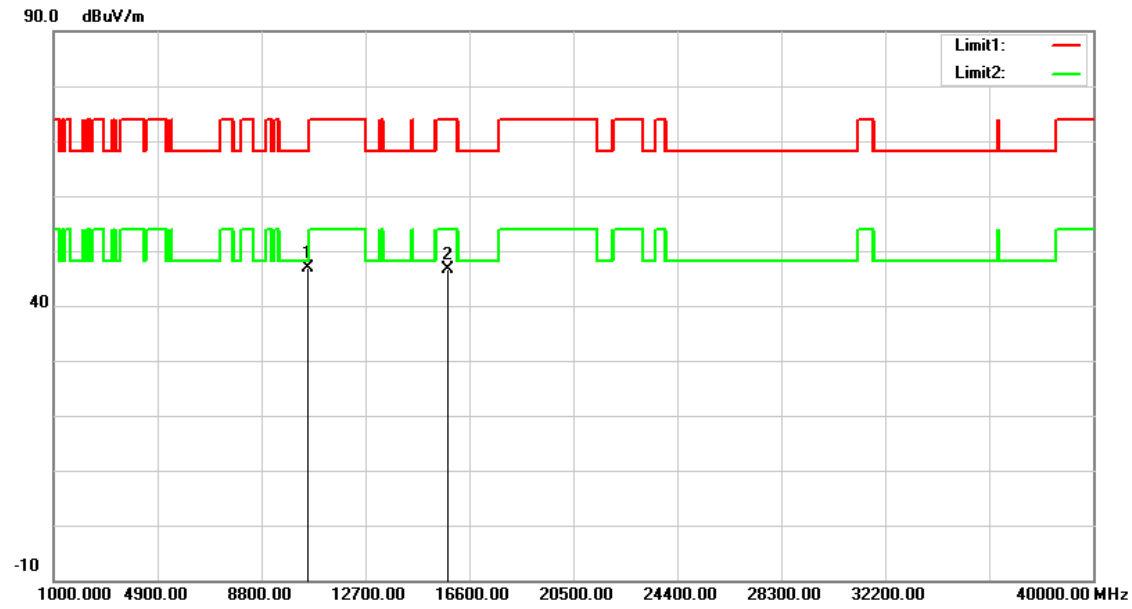


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	32.39	14.59	46.98	68.20	-21.22	peak
2	15780.000	30.47	16.06	46.53	74.00	-27.47	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

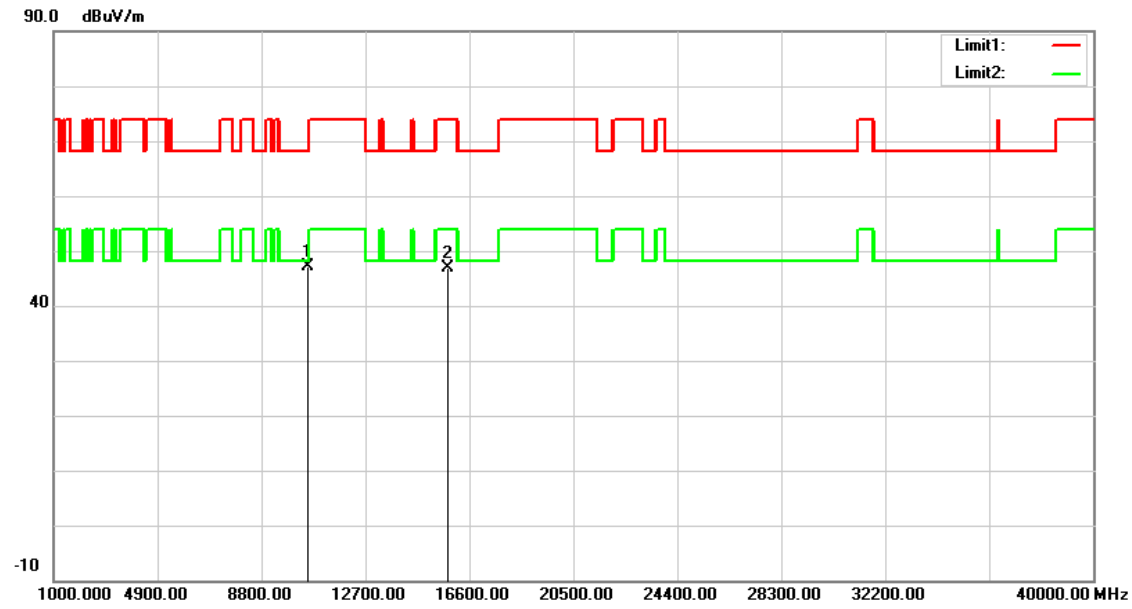


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	32.48	14.59	47.07	68.20	-21.13	peak
2	15780.000	30.73	16.06	46.79	74.00	-27.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

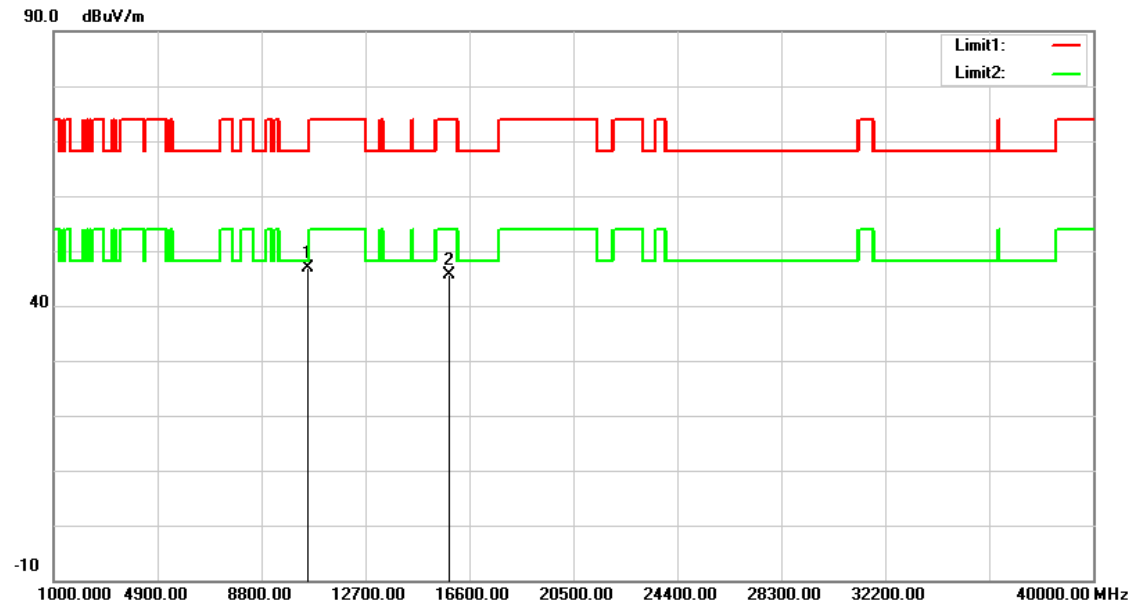


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	32.22	14.58	46.80	68.20	-21.40	peak
2	15840.000	29.73	15.85	45.58	74.00	-28.42	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

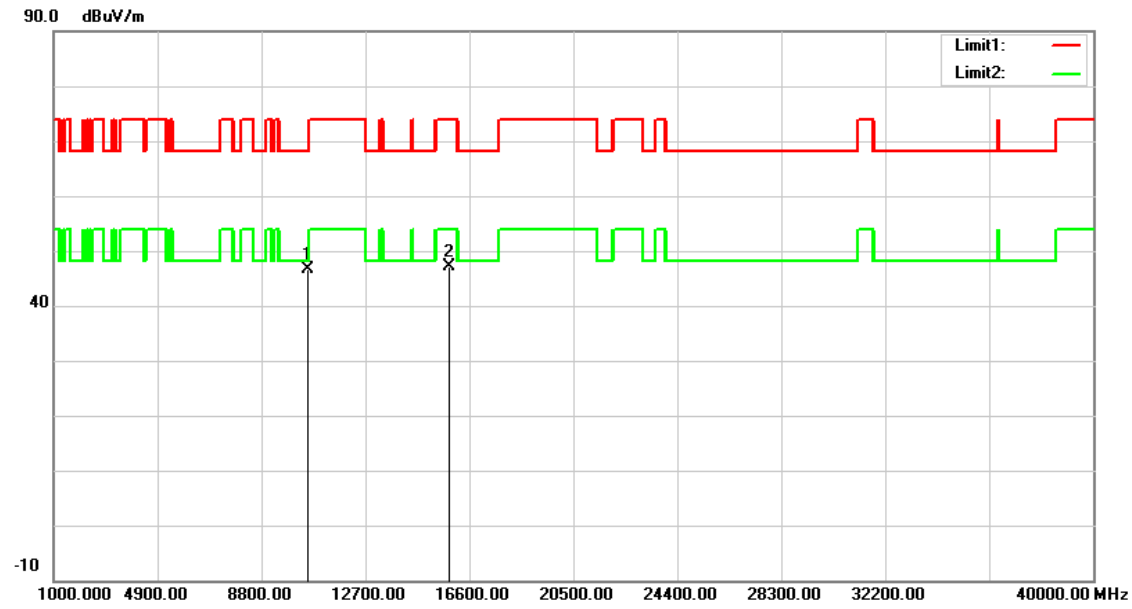


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	32.00	14.58	46.58	68.20	-21.62	peak
2	15840.000	31.39	15.85	47.24	74.00	-26.76	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

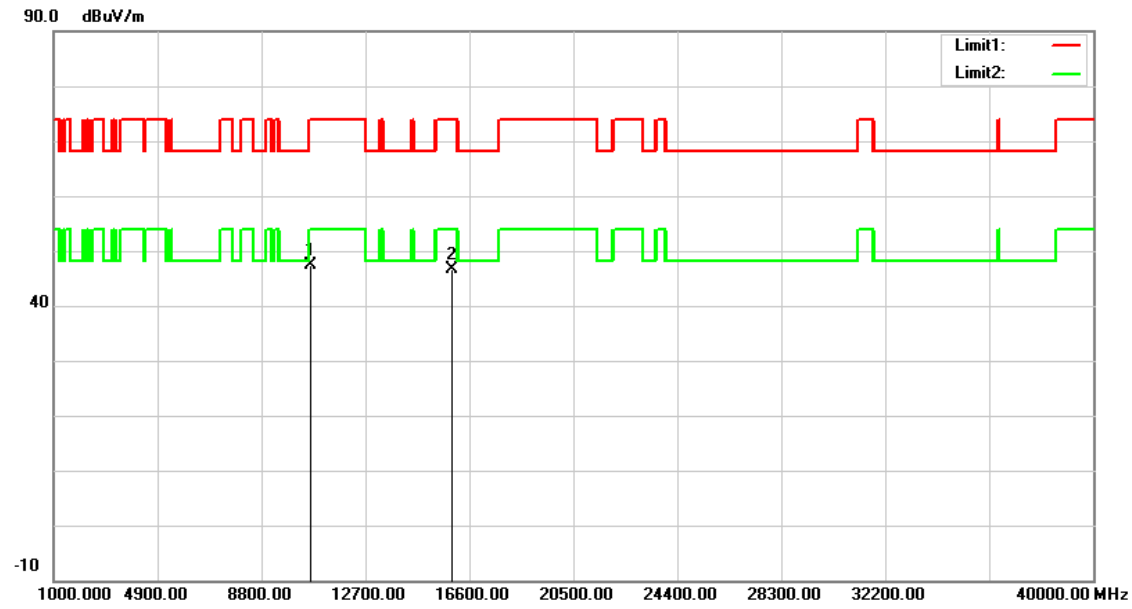


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	32.73	14.56	47.29	74.00	-26.71	peak
2	15960.000	31.29	15.44	46.73	74.00	-27.27	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

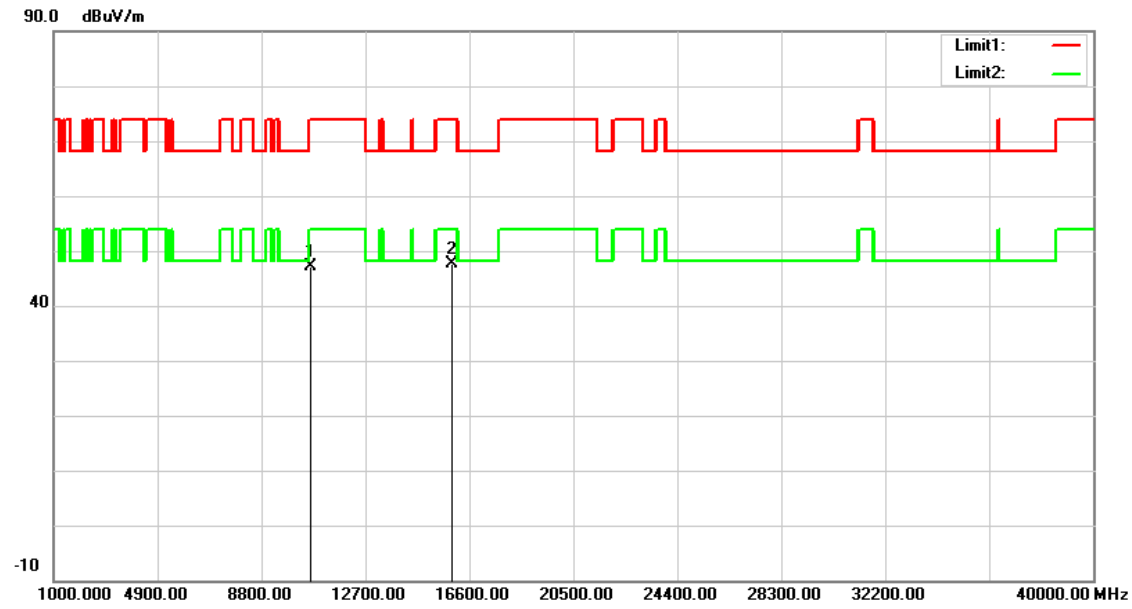


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	32.67	14.56	47.23	74.00	-26.77	peak
2	15960.000	32.20	15.44	47.64	74.00	-26.36	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

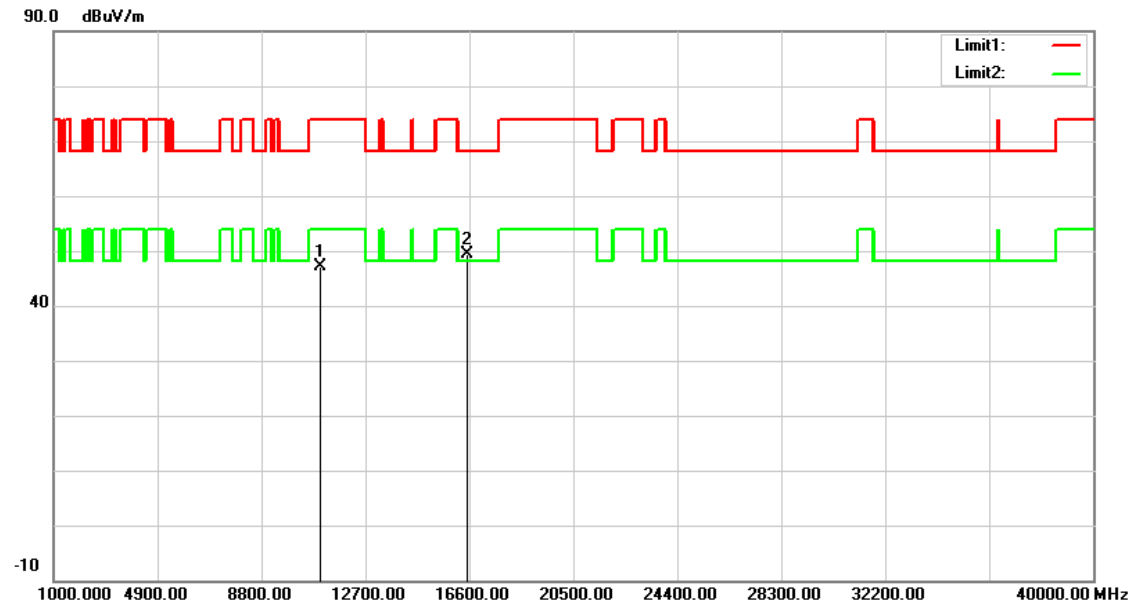


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	32.65	14.47	47.12	74.00	-26.88	peak
2	16500.000	32.79	16.63	49.42	68.20	-18.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

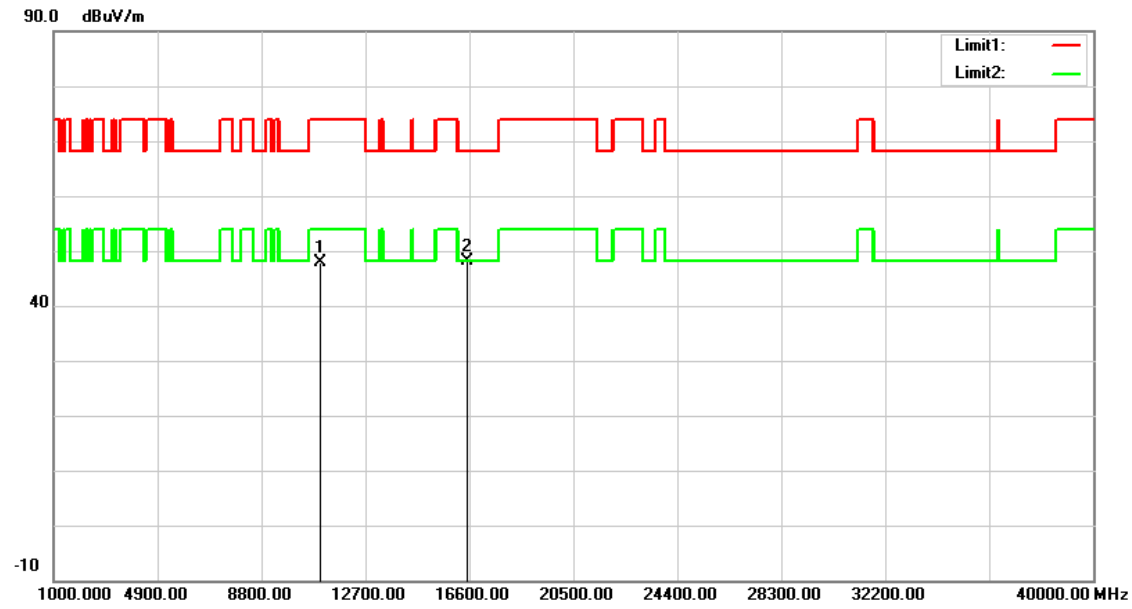


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	33.41	14.47	47.88	74.00	-26.12	peak
2	16500.000	31.59	16.63	48.22	68.20	-19.98	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

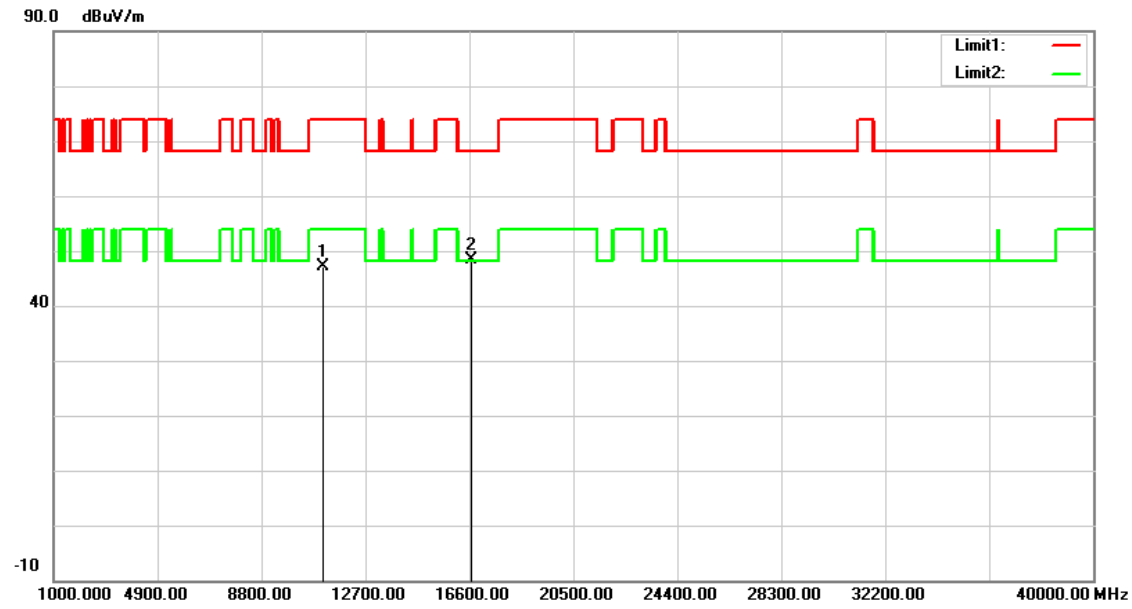


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	32.55	14.70	47.25	74.00	-26.75	peak
2	16680.000	30.45	17.95	48.40	68.20	-19.80	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

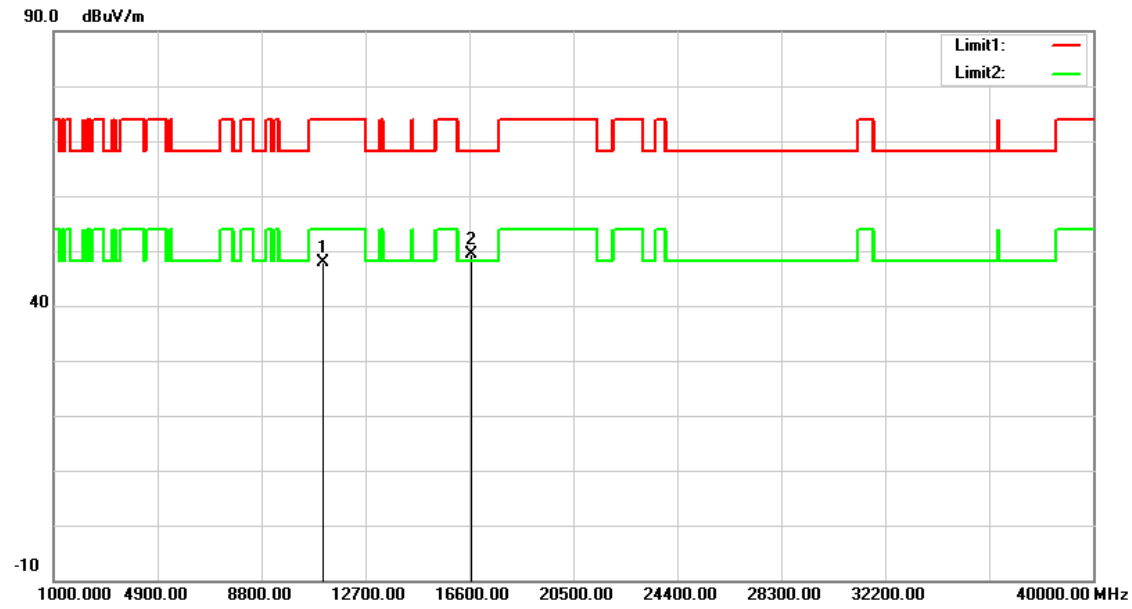


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	33.14	14.70	47.84	74.00	-26.16	peak
2	16680.000	31.45	17.95	49.40	68.20	-18.80	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

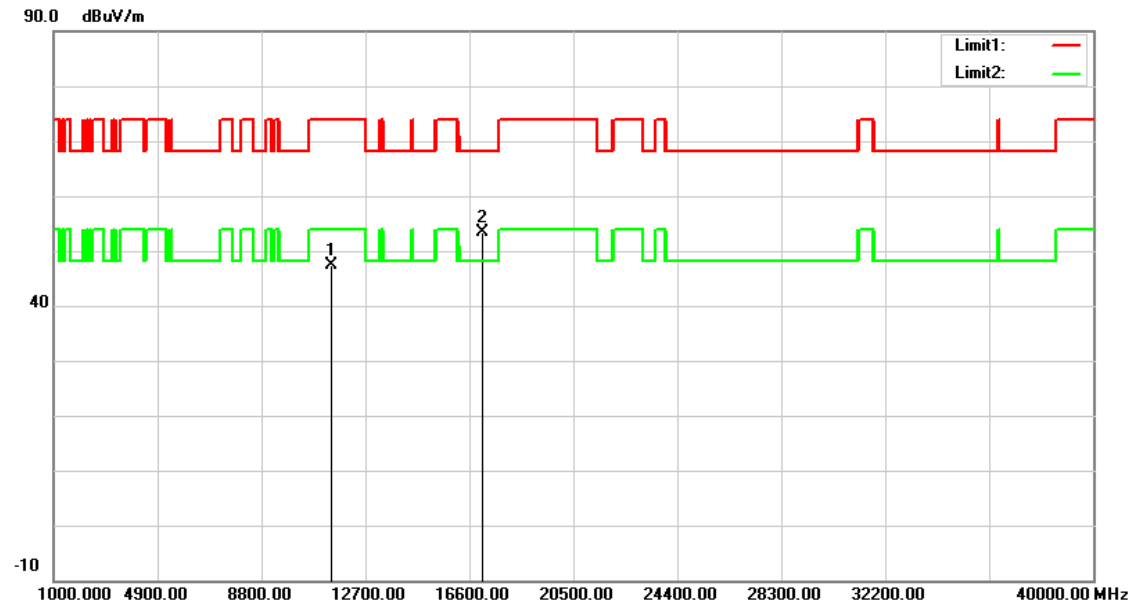


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	32.22	15.22	47.44	74.00	-26.56	peak
2	17100.000	32.47	20.89	53.36	68.20	-14.84	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

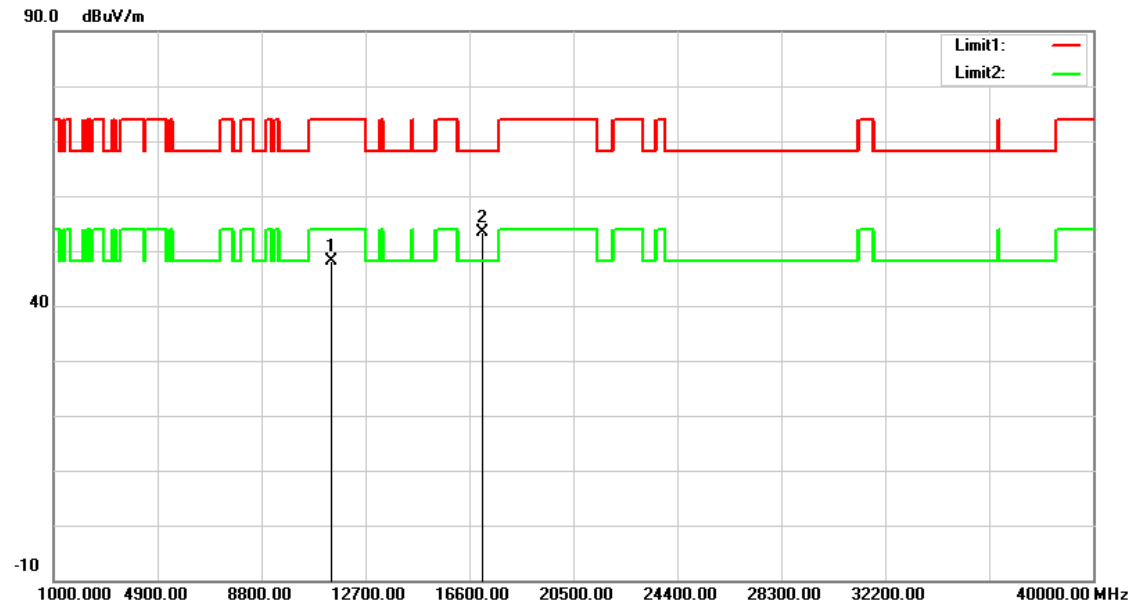


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	32.94	15.22	48.16	74.00	-25.84	peak
2	17100.000	32.58	20.89	53.47	68.20	-14.73	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

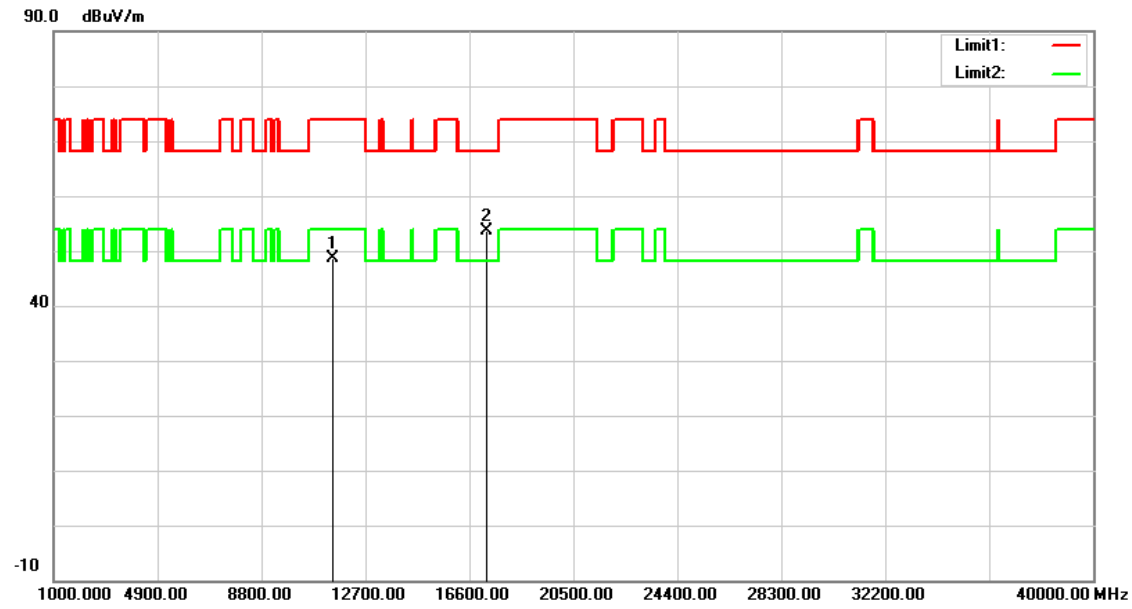


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	33.16	15.39	48.55	74.00	-25.45	peak
2	17235.000	31.91	21.71	53.62	68.20	-14.58	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

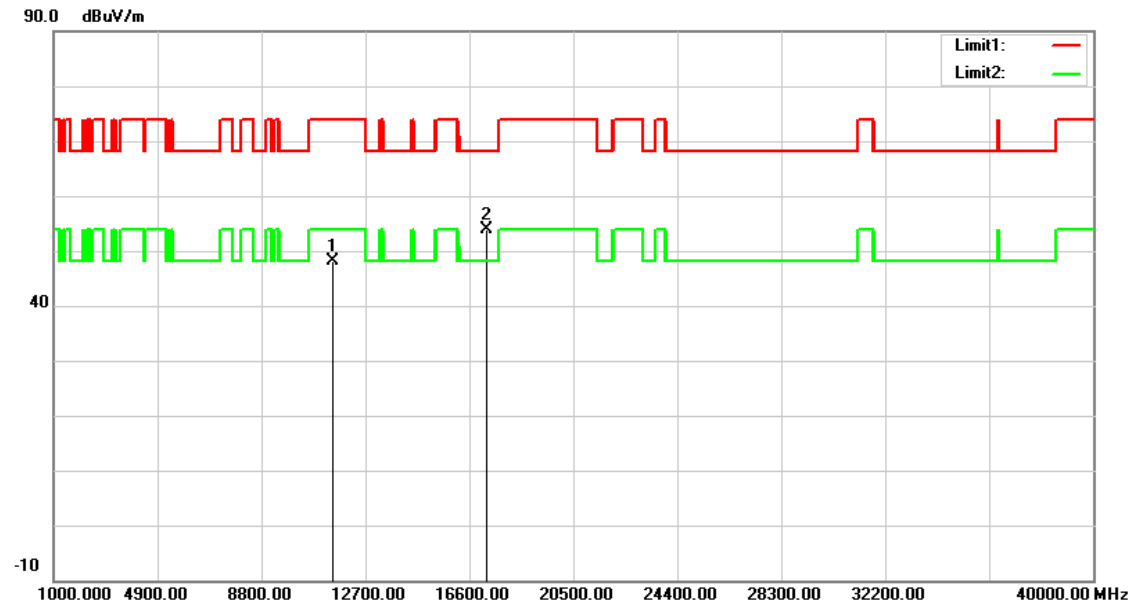


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	32.73	15.39	48.12	74.00	-25.88	peak
2	17235.000	32.18	21.71	53.89	68.20	-14.31	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

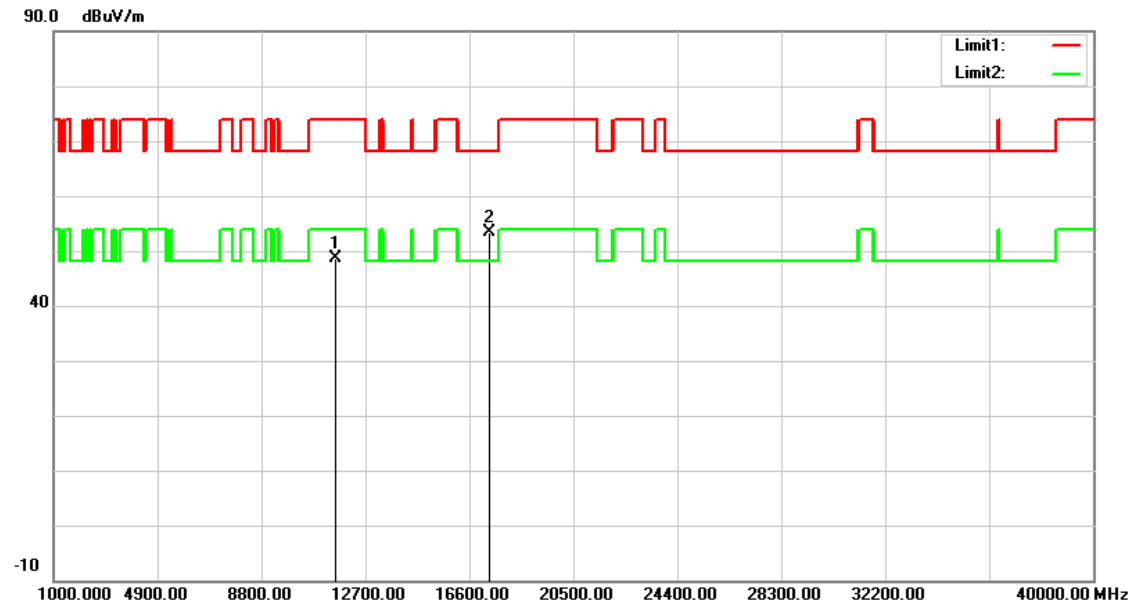


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	33.42	15.25	48.67	74.00	-25.33	peak
2	17355.000	30.97	22.42	53.39	68.20	-14.81	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

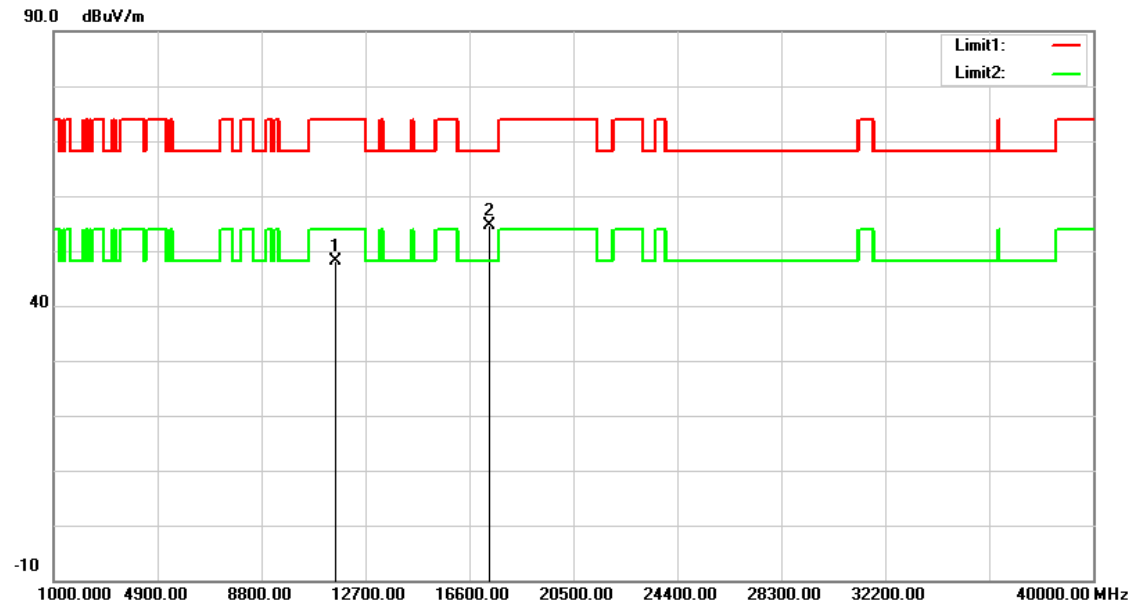


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	32.99	15.25	48.24	74.00	-25.76	peak
2	17355.000	32.31	22.42	54.73	68.20	-13.47	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

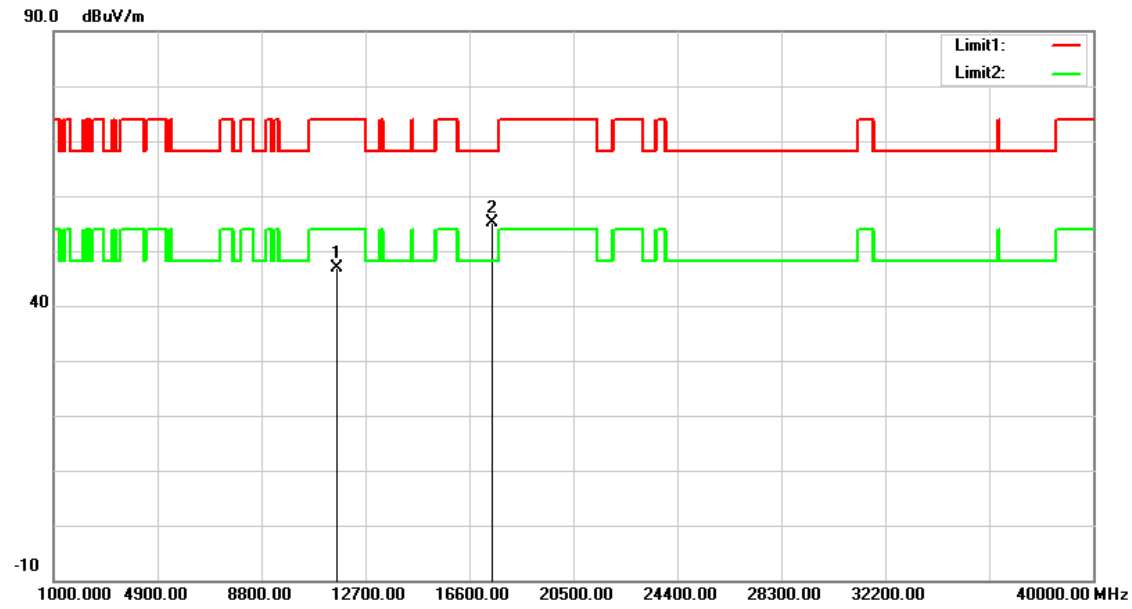


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	31.77	15.08	46.85	74.00	-27.15	peak
2	17475.000	31.97	23.13	55.10	68.20	-13.10	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

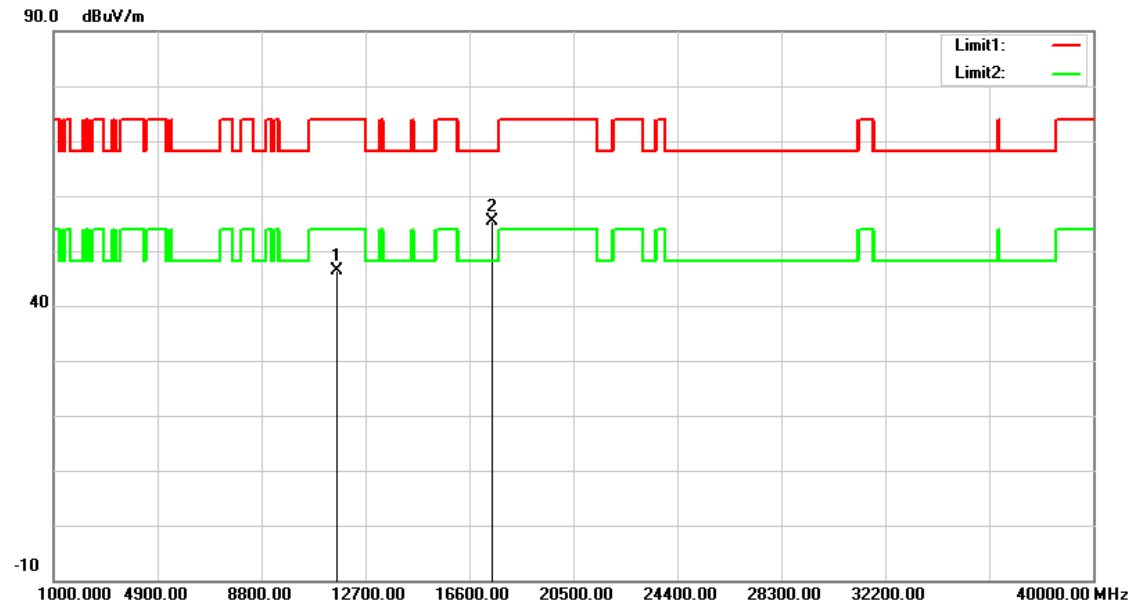


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	31.30	15.08	46.38	74.00	-27.62	peak
2	17475.000	32.33	23.13	55.46	68.20	-12.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

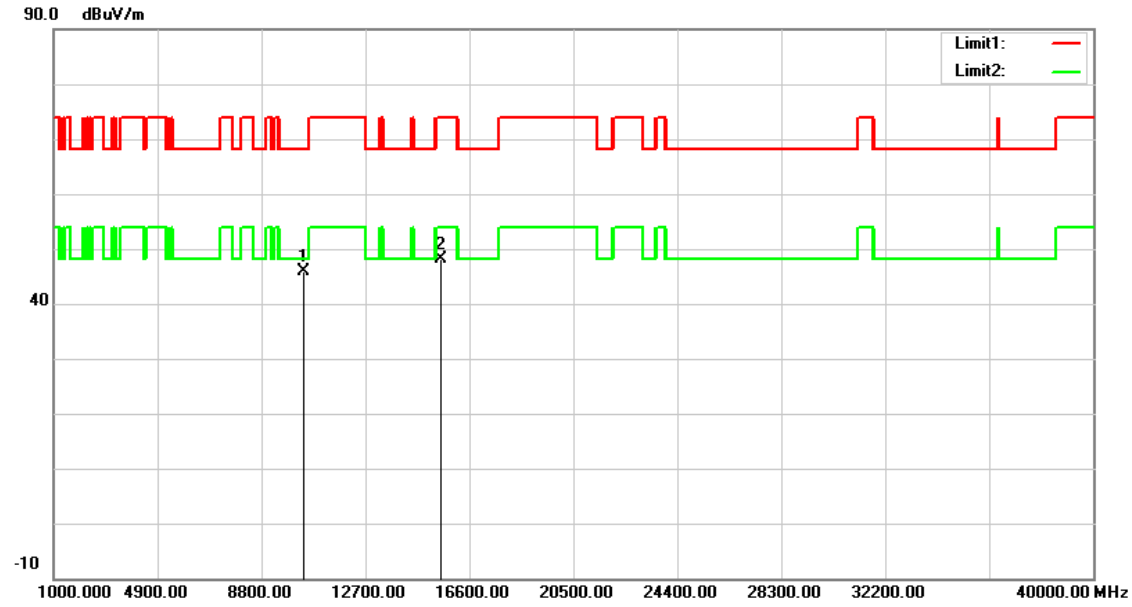


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	31.52	14.29	45.81	68.20	-22.39	peak
2	15540.000	31.19	16.86	48.05	74.00	-25.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

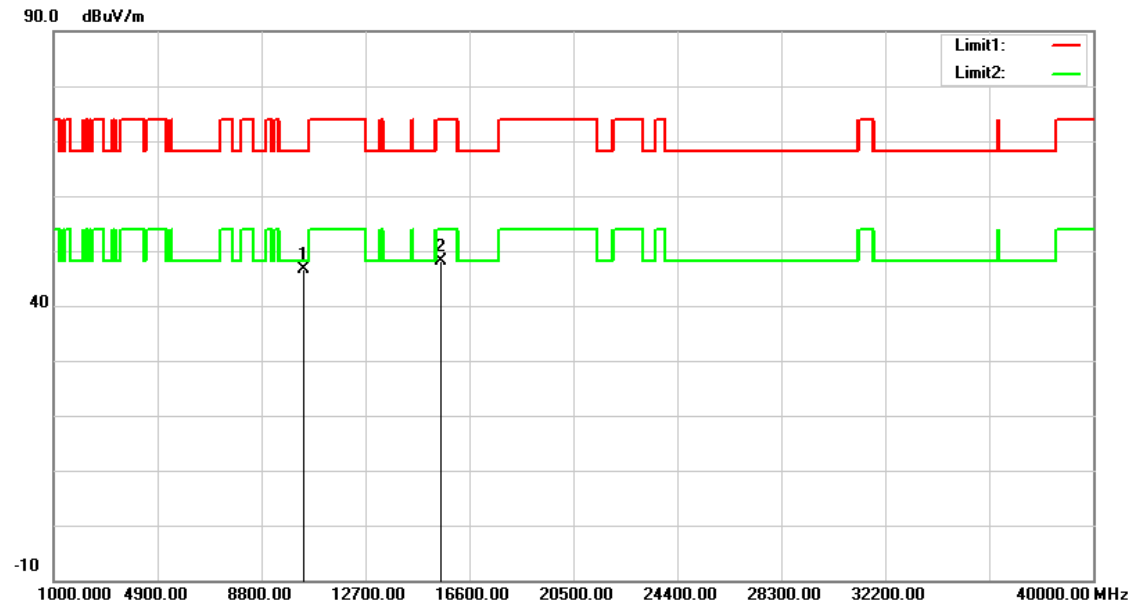


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	32.34	14.29	46.63	68.20	-21.57	peak
2	15540.000	31.16	16.86	48.02	74.00	-25.98	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

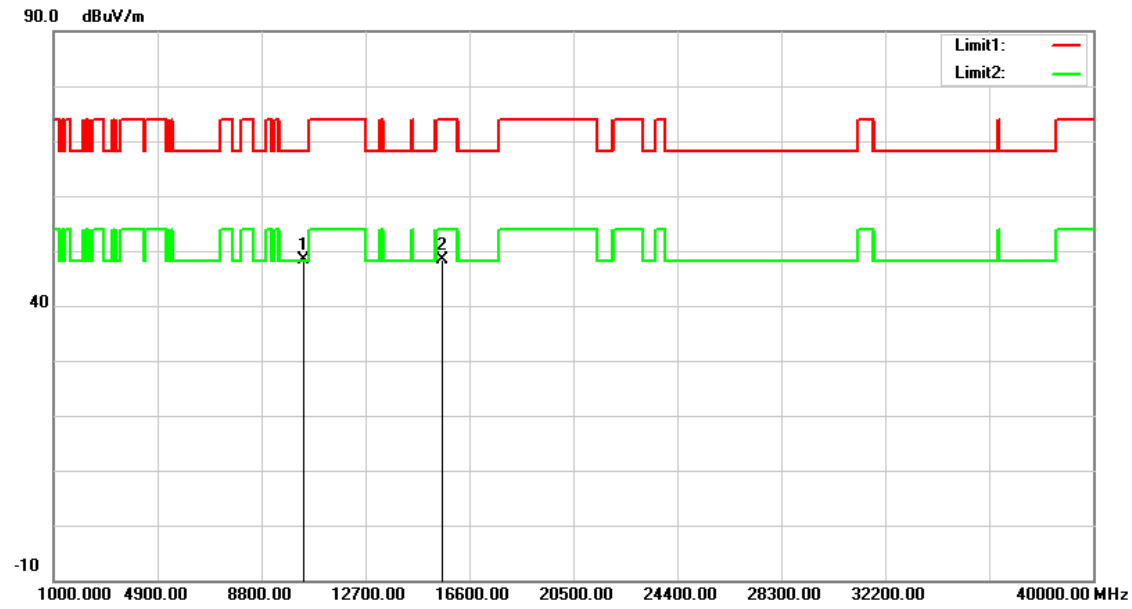


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	33.95	14.38	48.33	68.20	-19.87	peak
2	15600.000	31.78	16.65	48.43	74.00	-25.57	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

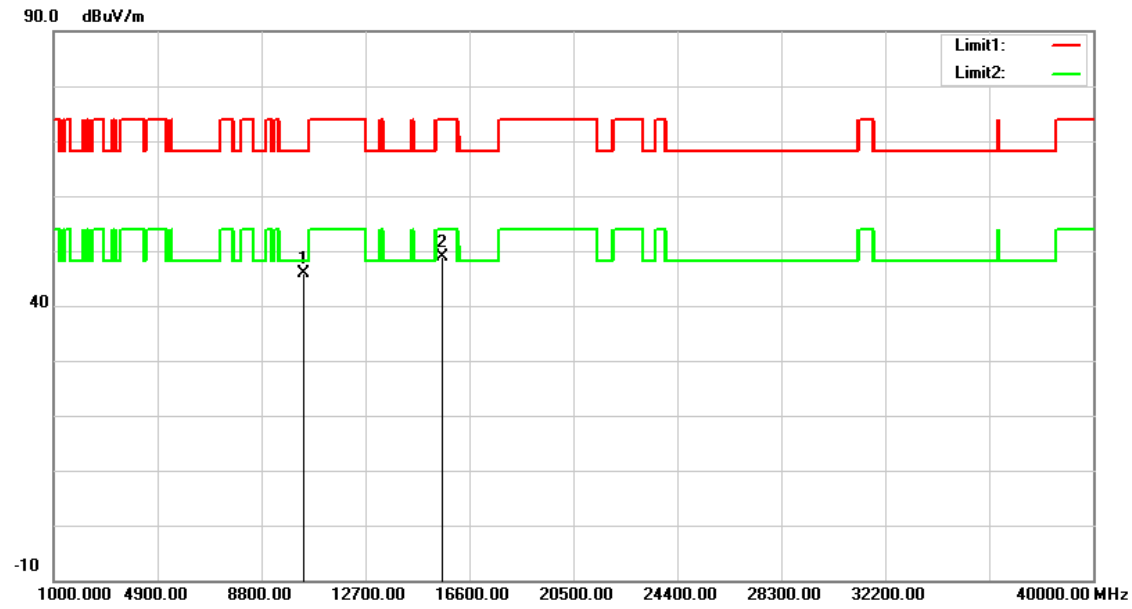


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	31.59	14.38	45.97	68.20	-22.23	peak
2	15600.000	32.26	16.65	48.91	74.00	-25.09	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

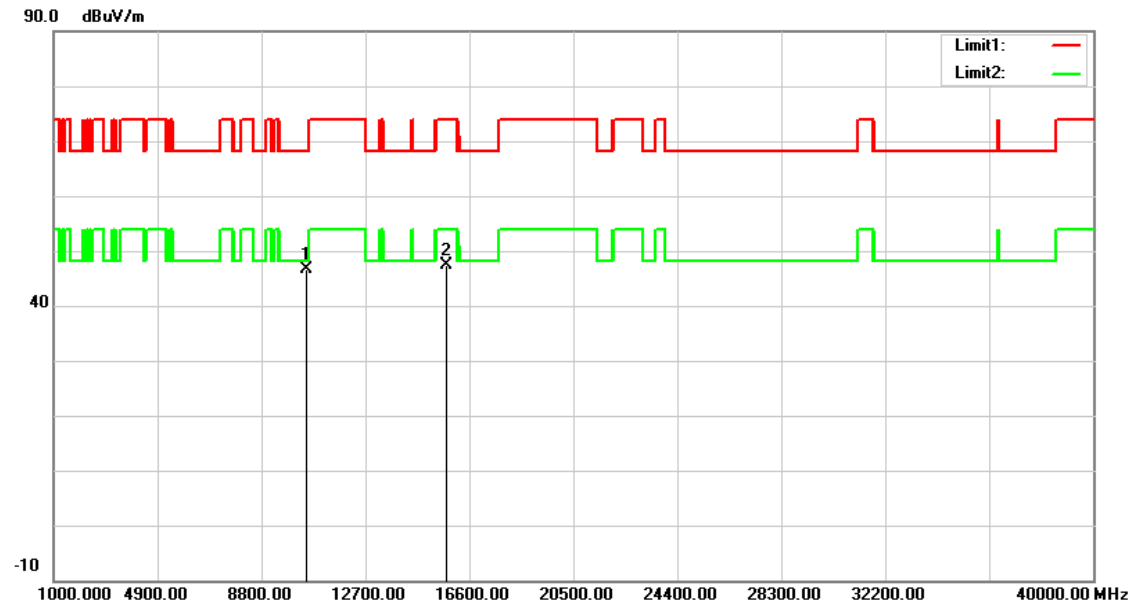


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	32.07	14.55	46.62	68.20	-21.58	peak
2	15720.000	31.10	16.24	47.34	74.00	-26.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

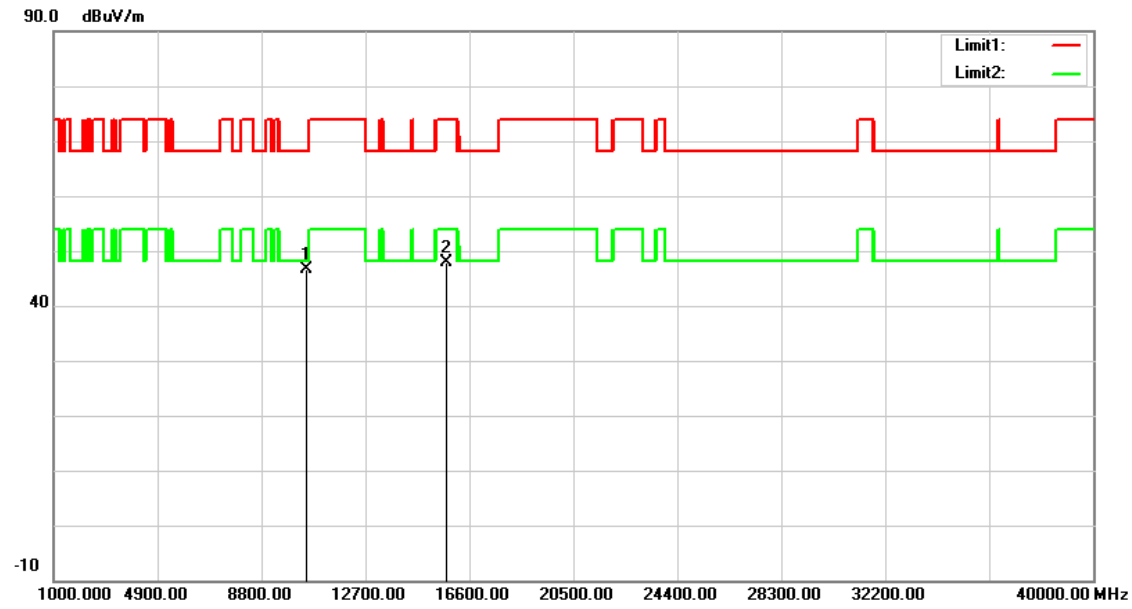


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	31.97	14.55	46.52	68.20	-21.68	peak
2	15720.000	31.54	16.24	47.78	74.00	-26.22	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

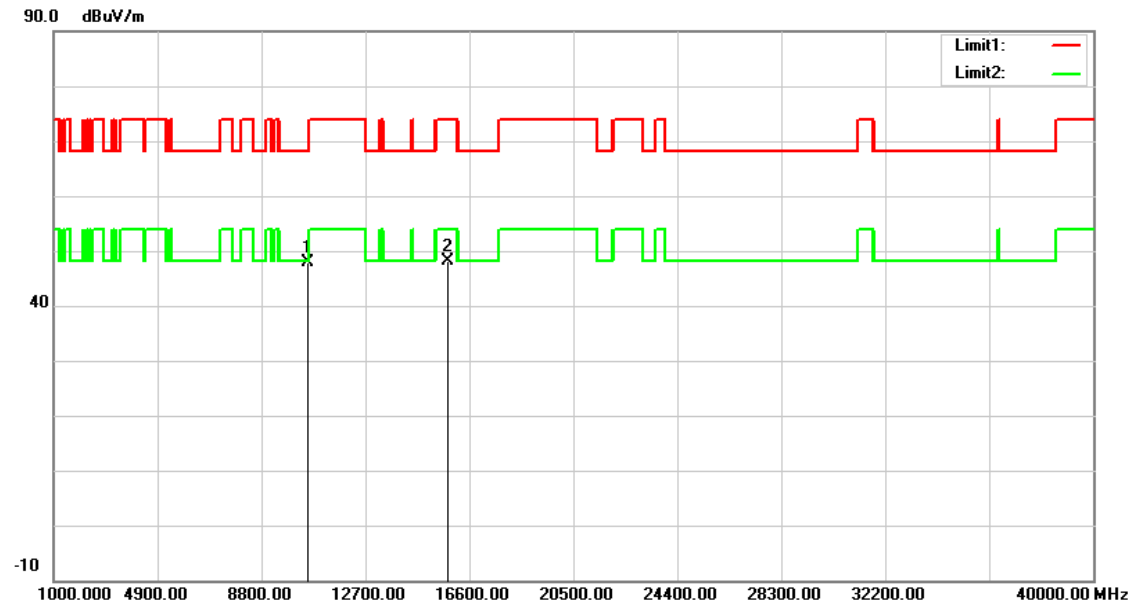


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	33.25	14.59	47.84	68.20	-20.36	peak
2	15780.000	32.06	16.06	48.12	74.00	-25.88	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

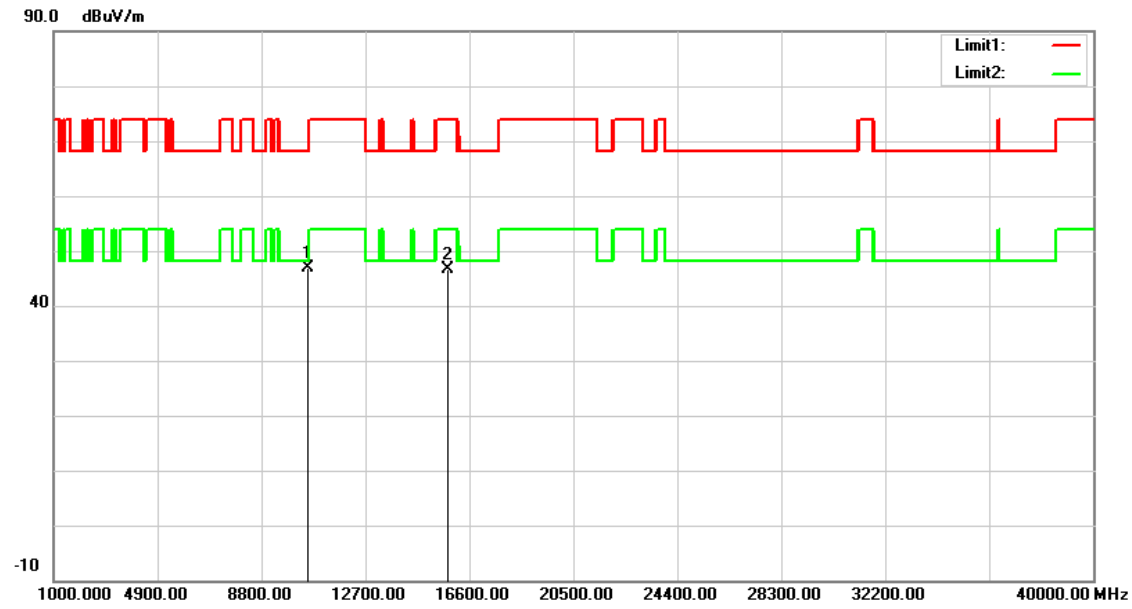


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	32.32	14.59	46.91	68.20	-21.29	peak
2	15780.000	30.64	16.06	46.70	74.00	-27.30	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

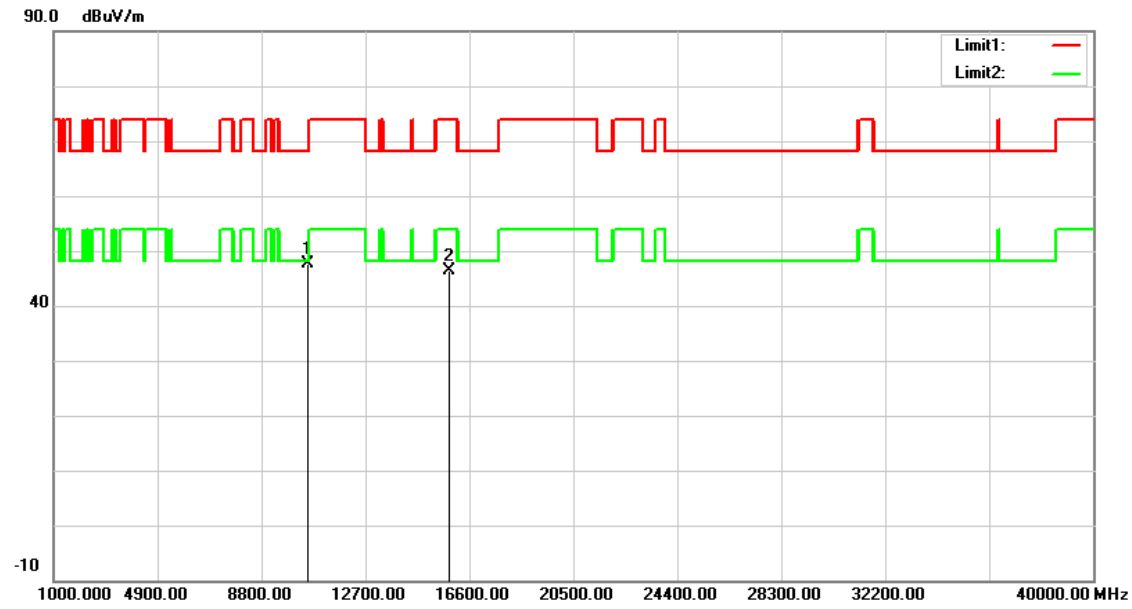


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	33.02	14.58	47.60	68.20	-20.60	peak
2	15840.000	30.44	15.85	46.29	74.00	-27.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

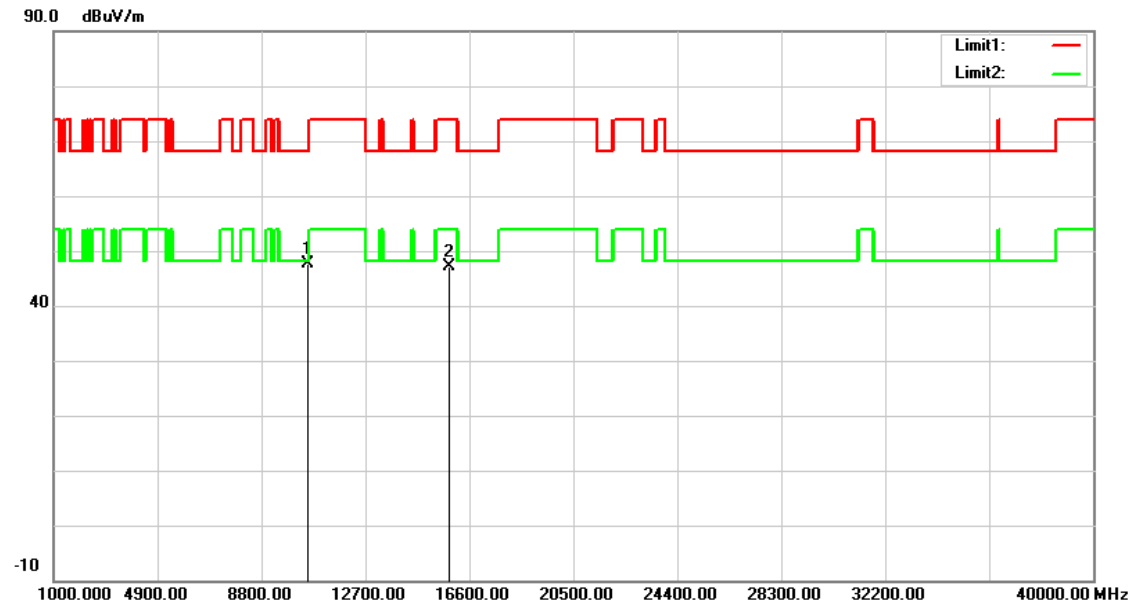


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	32.98	14.58	47.56	68.20	-20.64	peak
2	15840.000	31.34	15.85	47.19	74.00	-26.81	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

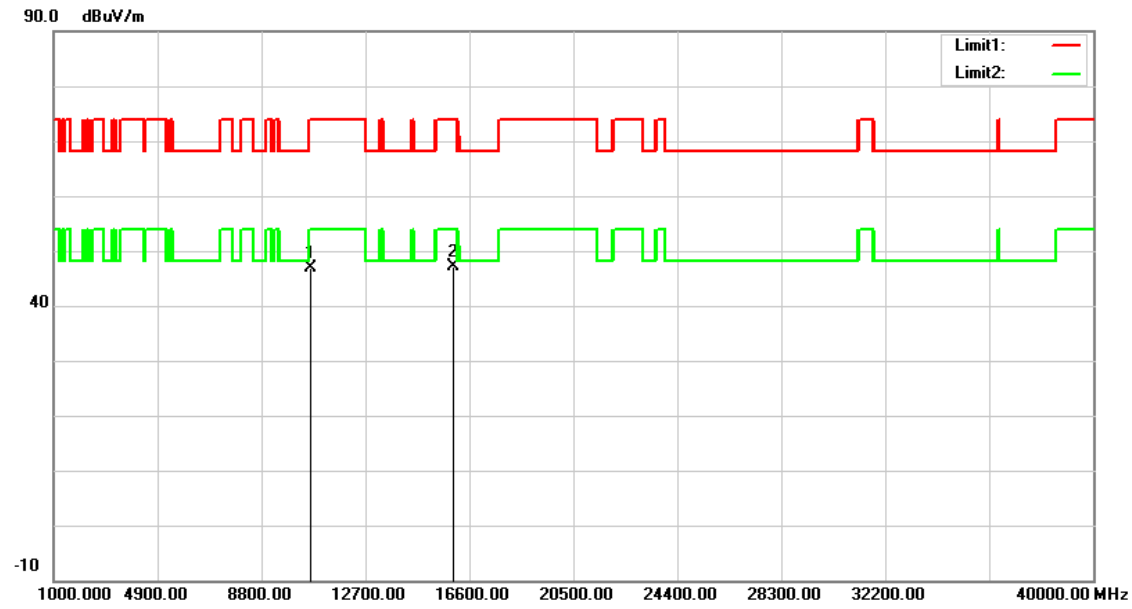


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	32.41	14.56	46.97	74.00	-27.03	peak
2	15960.000	31.71	15.44	47.15	74.00	-26.85	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

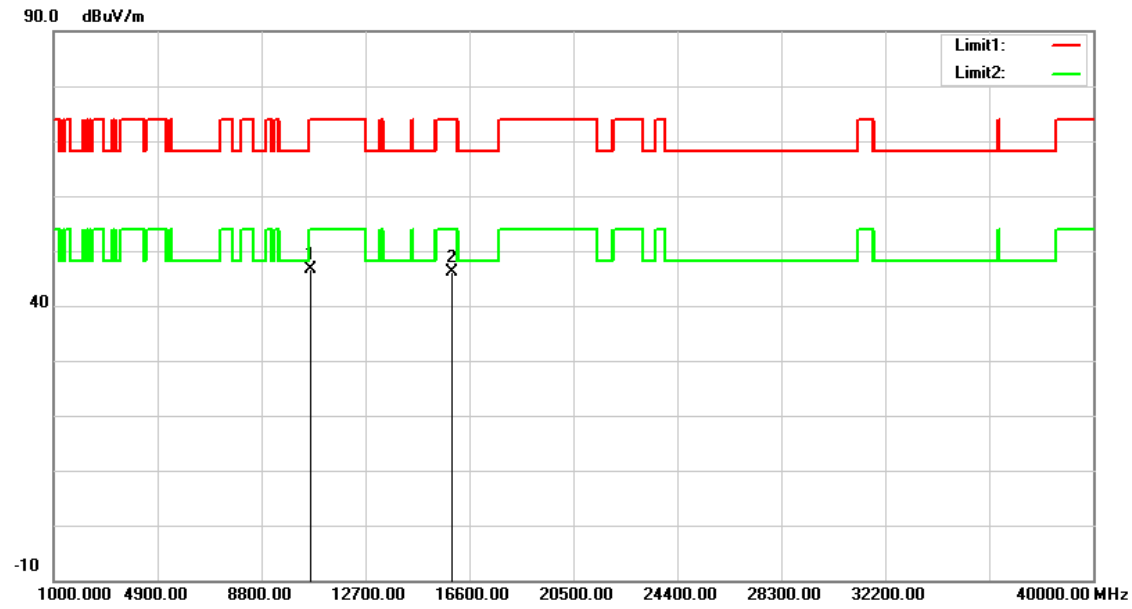


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	32.16	14.56	46.72	74.00	-27.28	peak
2	15960.000	30.77	15.44	46.21	74.00	-27.79	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

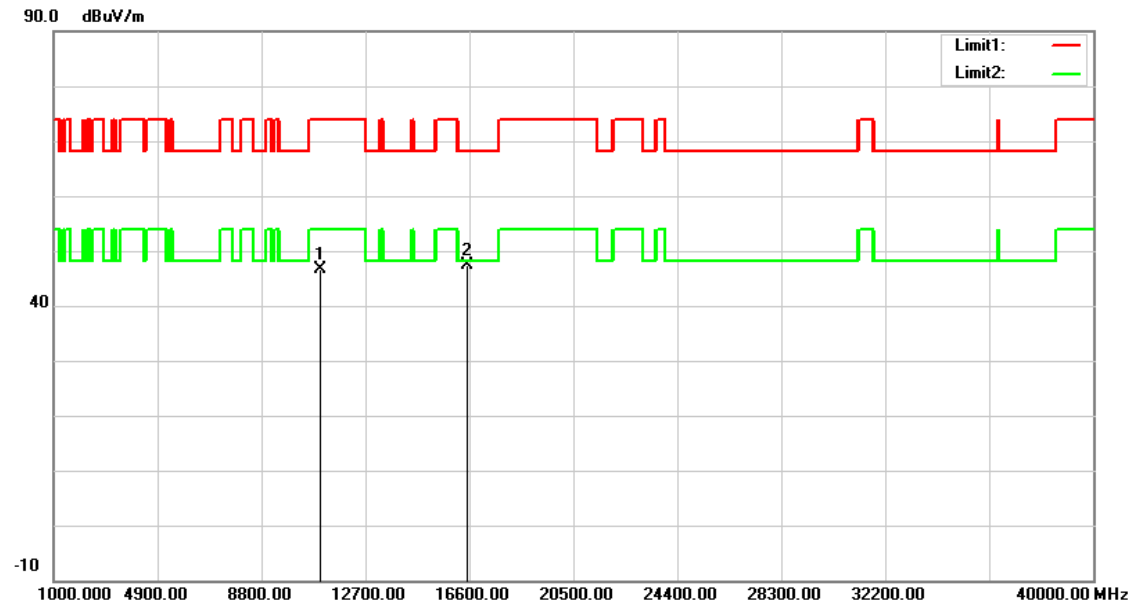


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	32.19	14.47	46.66	74.00	-27.34	peak
2	16500.000	30.64	16.63	47.27	68.20	-20.93	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

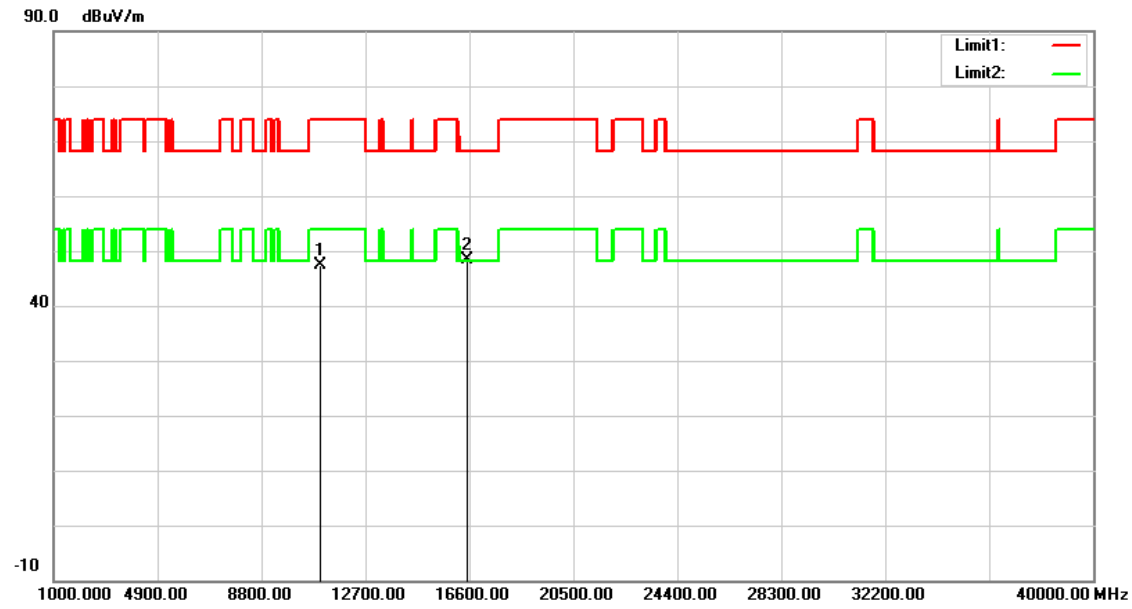


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	32.79	14.47	47.26	74.00	-26.74	peak
2	16500.000	31.76	16.63	48.39	68.20	-19.81	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

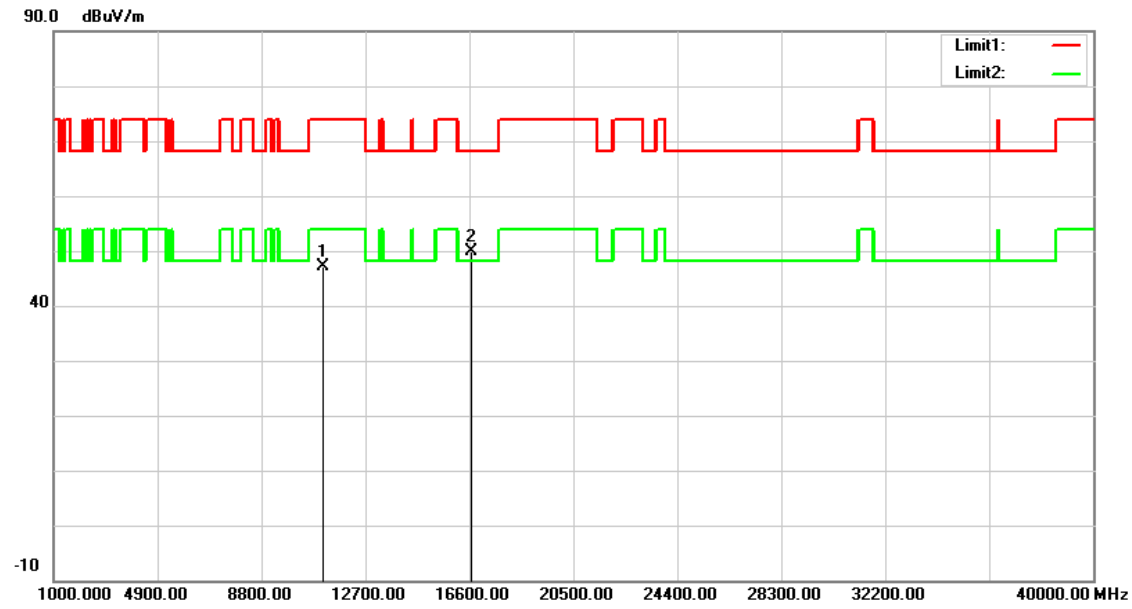


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	32.54	14.70	47.24	74.00	-26.76	peak
2	16680.000	31.93	17.95	49.88	68.20	-18.32	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

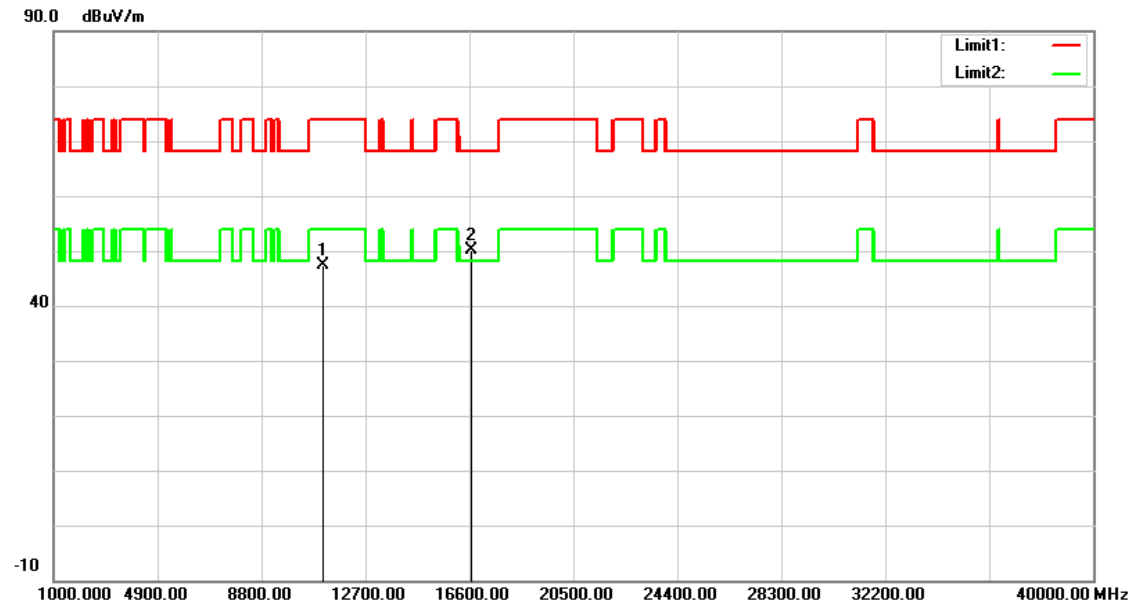


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	32.75	14.70	47.45	74.00	-26.55	peak
2	16680.000	32.17	17.95	50.12	68.20	-18.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

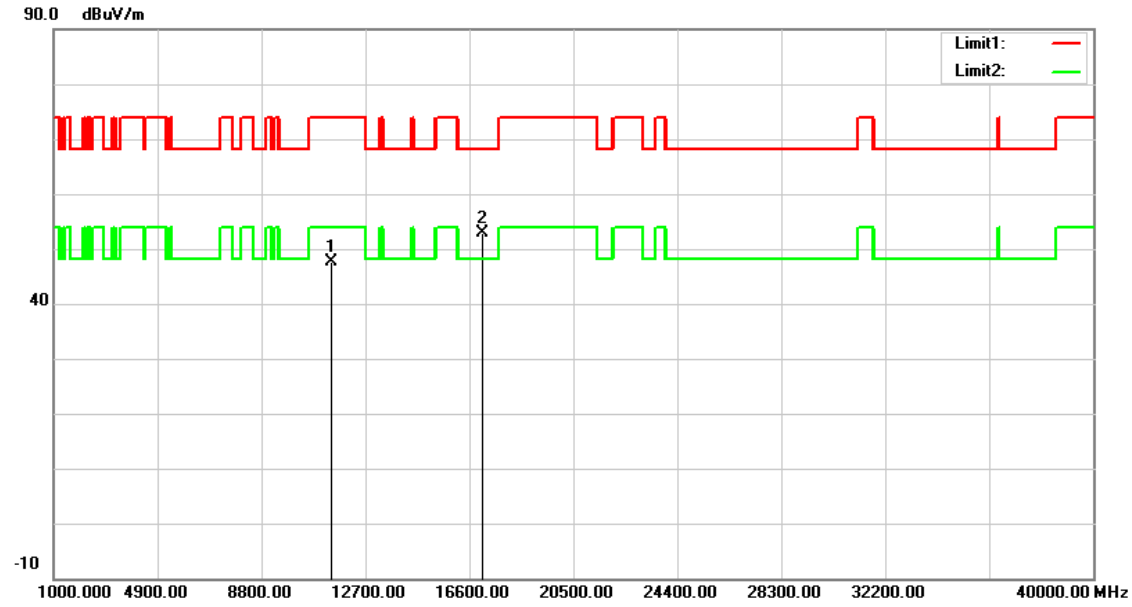


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	32.34	15.22	47.56	74.00	-26.44	peak
2	17100.000	31.89	20.89	52.78	68.20	-15.42	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

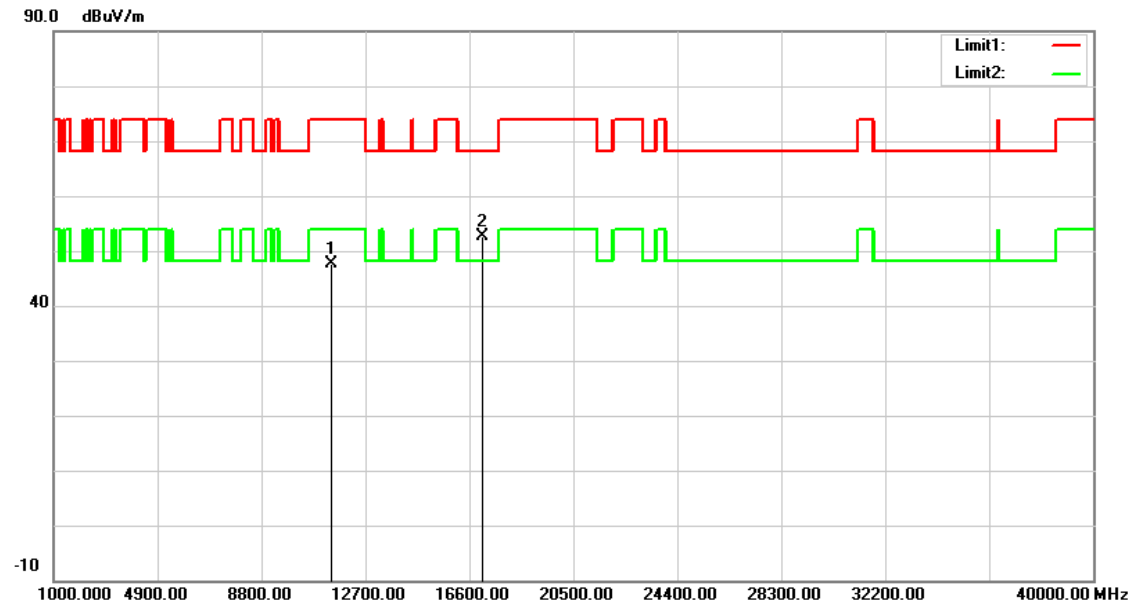


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	32.35	15.22	47.57	74.00	-26.43	peak
2	17100.000	31.70	20.89	52.59	68.20	-15.61	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

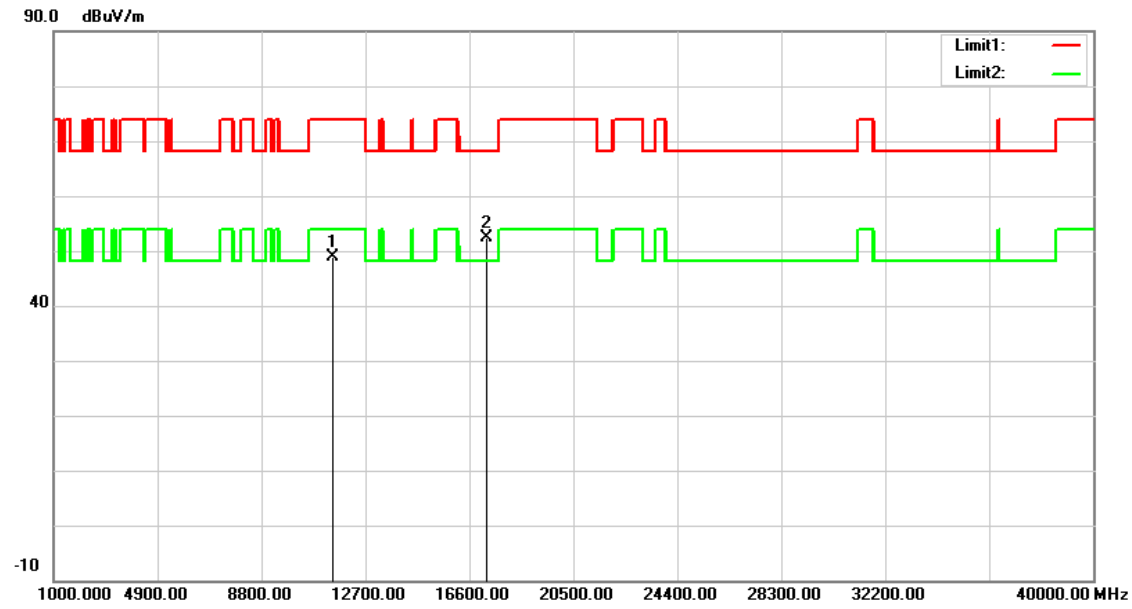


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	33.49	15.39	48.88	74.00	-25.12	peak
2	17235.000	30.59	21.71	52.30	68.20	-15.90	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

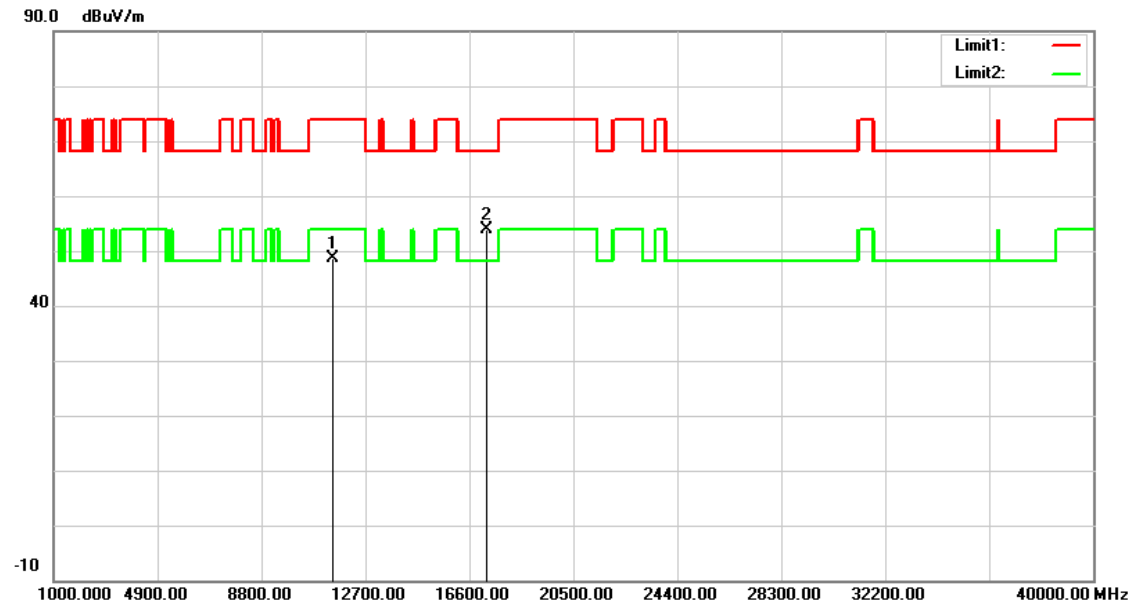


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	33.19	15.39	48.58	74.00	-25.42	peak
2	17235.000	32.09	21.71	53.80	68.20	-14.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

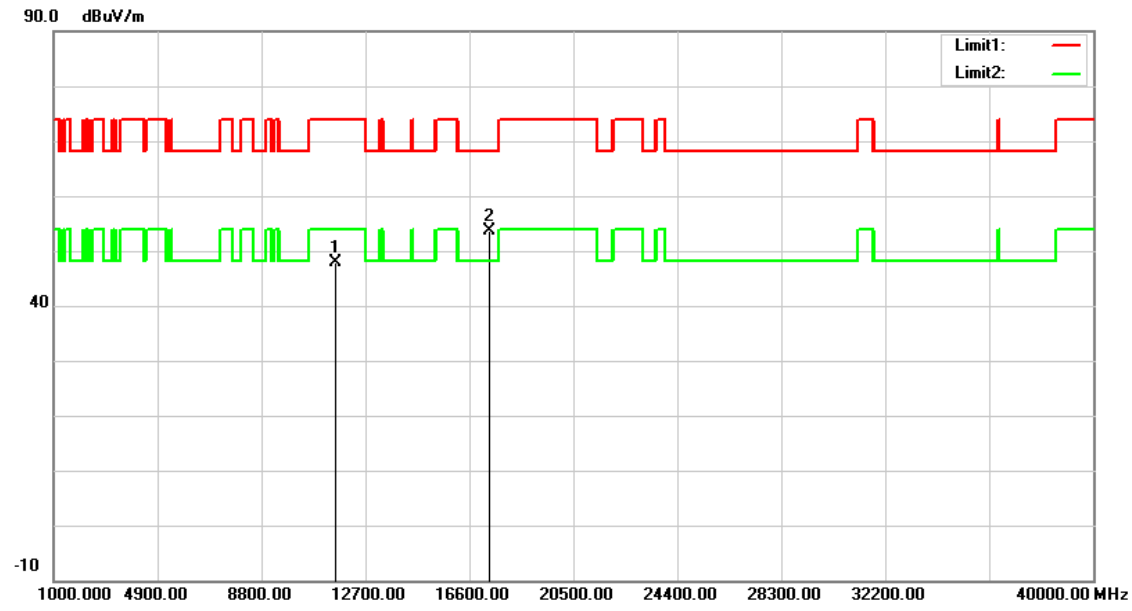


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	32.74	15.25	47.99	74.00	-26.01	peak
2	17355.000	31.20	22.42	53.62	68.20	-14.58	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

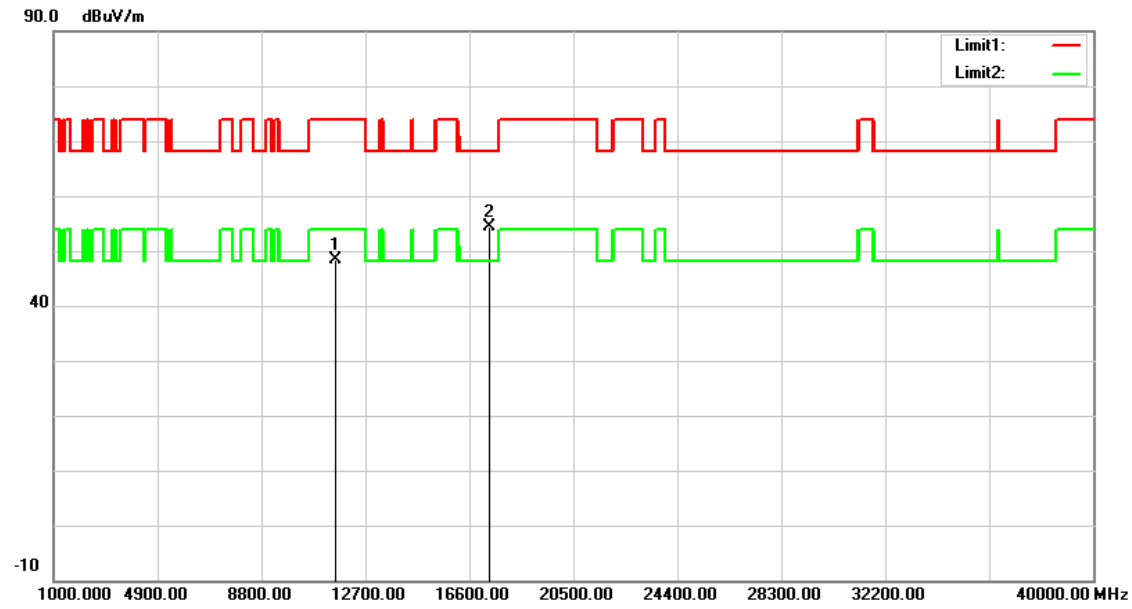


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	33.23	15.25	48.48	74.00	-25.52	peak
2	17355.000	31.99	22.42	54.41	68.20	-13.79	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

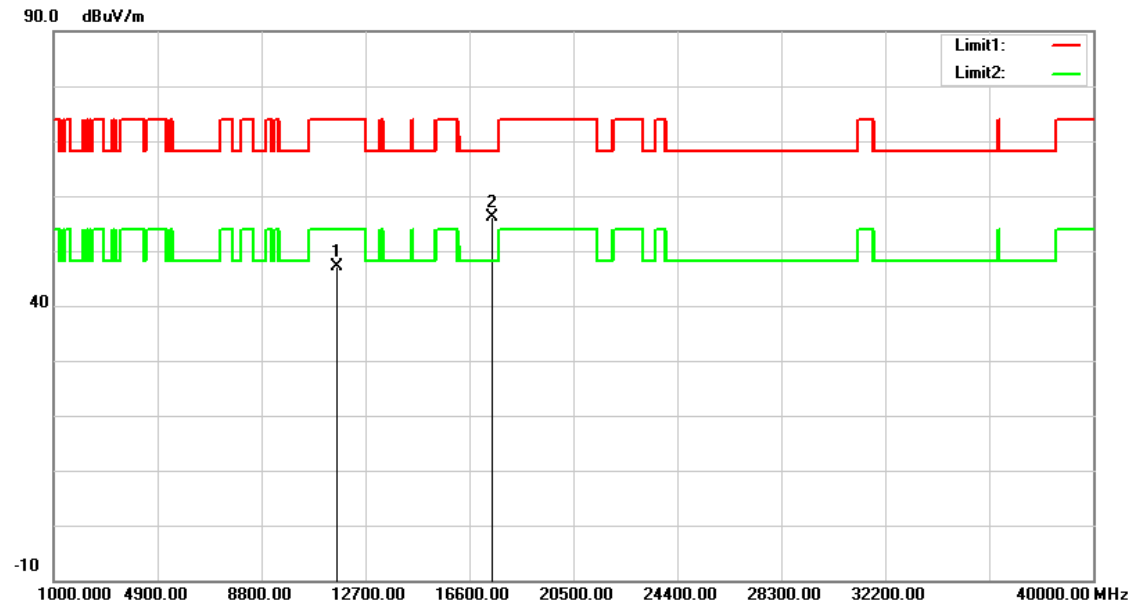


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	31.95	15.08	47.03	74.00	-26.97	peak
2	17475.000	32.97	23.13	56.10	68.20	-12.10	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

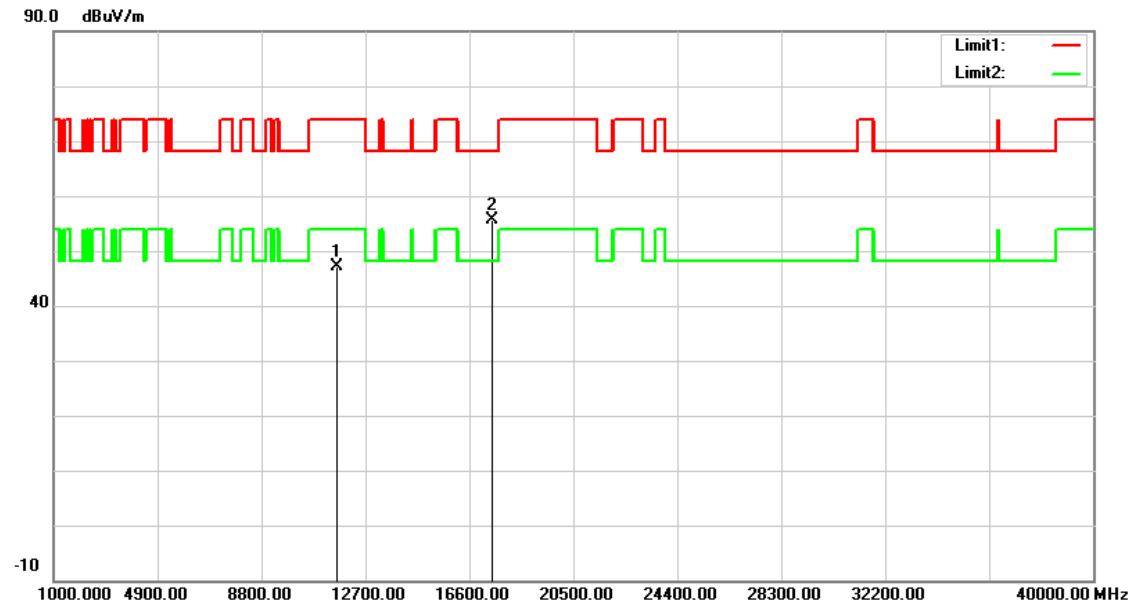


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	32.15	15.08	47.23	74.00	-26.77	peak
2	17475.000	32.55	23.13	55.68	68.20	-12.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

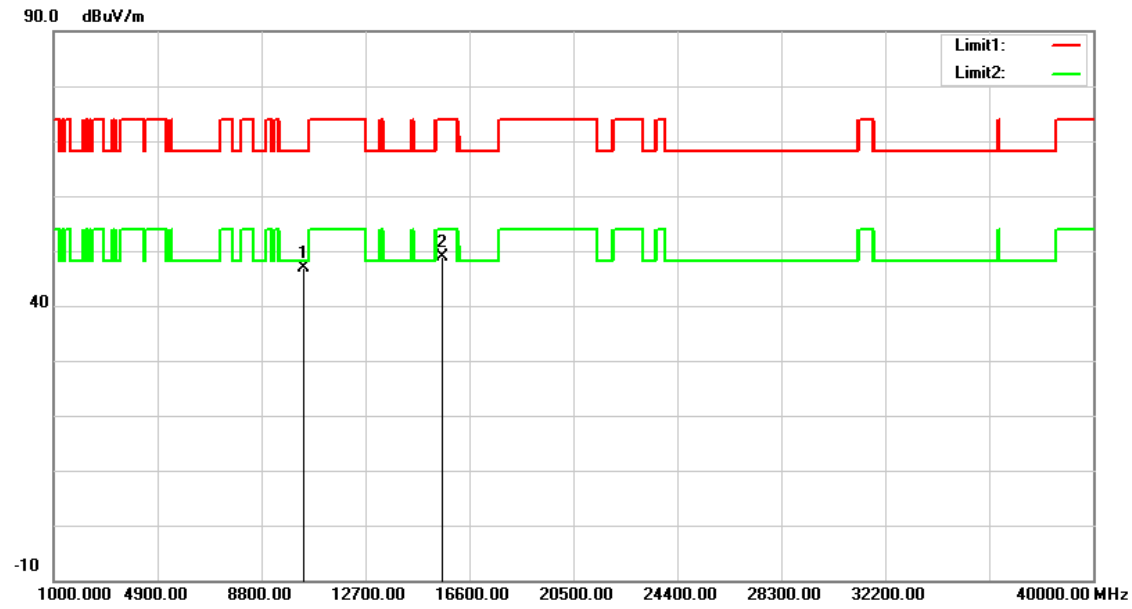


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	32.49	14.35	46.84	68.20	-21.36	peak
2	15570.000	32.22	16.75	48.97	74.00	-25.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

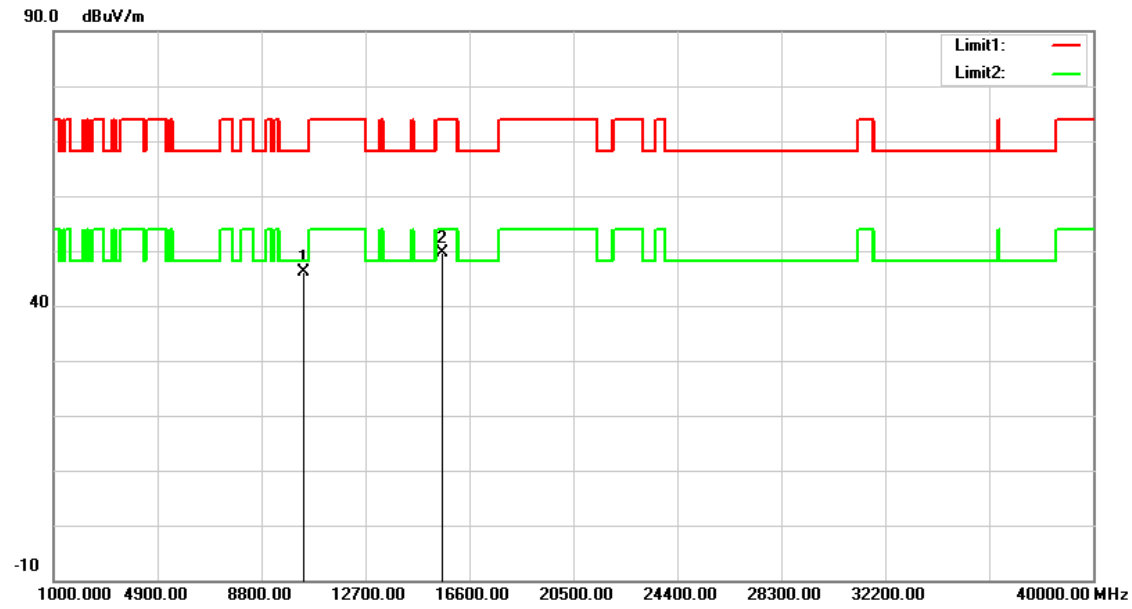


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	31.71	14.35	46.06	68.20	-22.14	peak
2	15570.000	32.79	16.75	49.54	74.00	-24.46	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

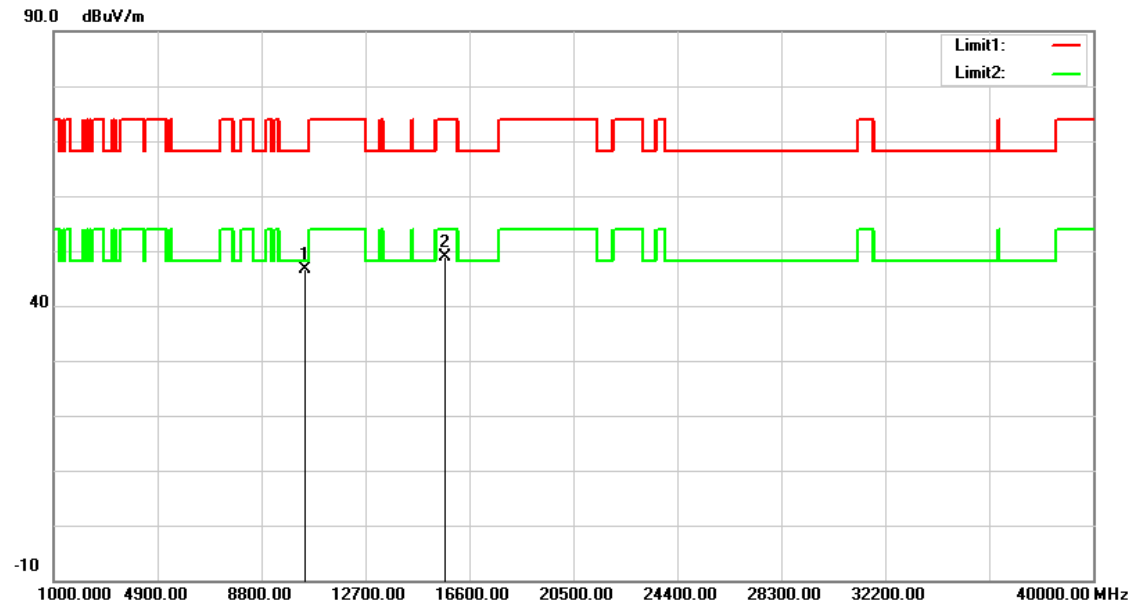


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	32.16	14.51	46.67	68.20	-21.53	peak
2	15690.000	32.51	16.35	48.86	74.00	-25.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

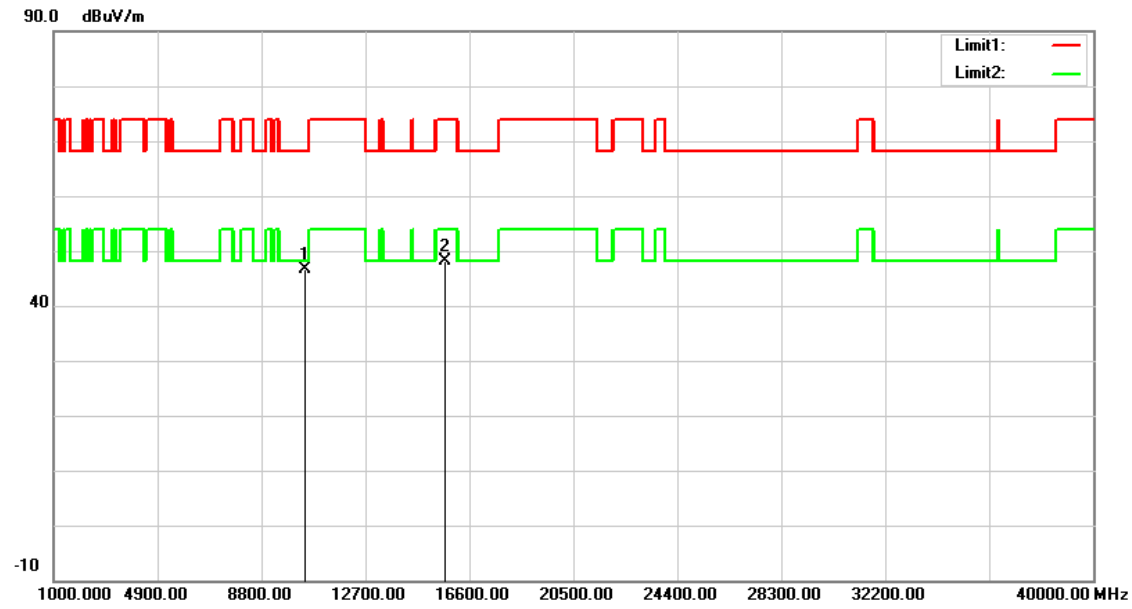


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	32.07	14.51	46.58	68.20	-21.62	peak
2	15690.000	31.76	16.35	48.11	74.00	-25.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

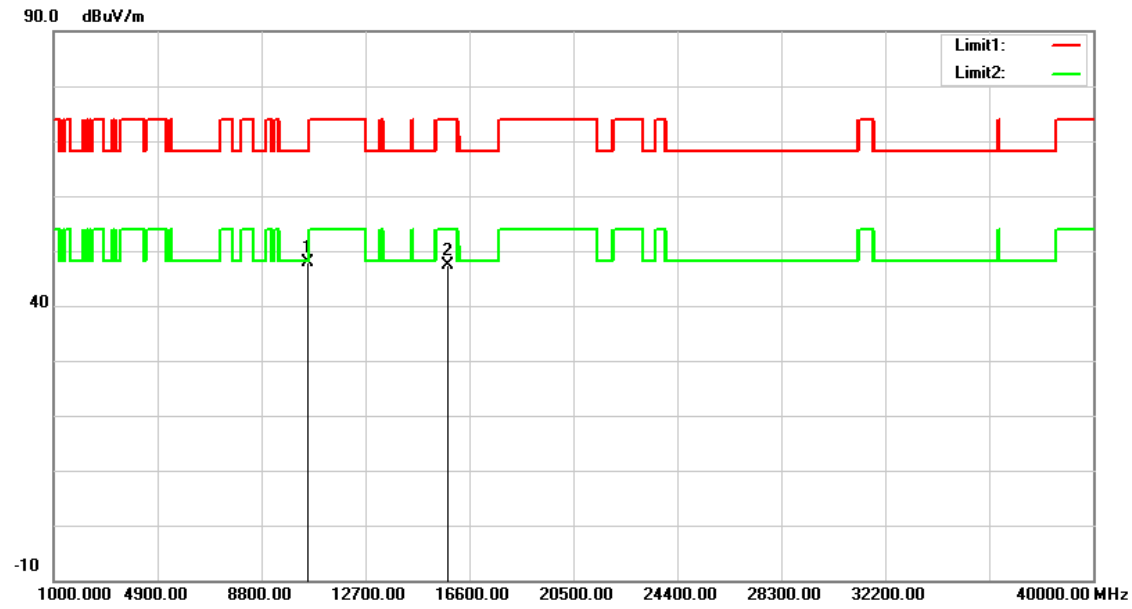


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	33.25	14.58	47.83	68.20	-20.37	peak
2	15810.000	31.37	15.95	47.32	74.00	-26.68	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

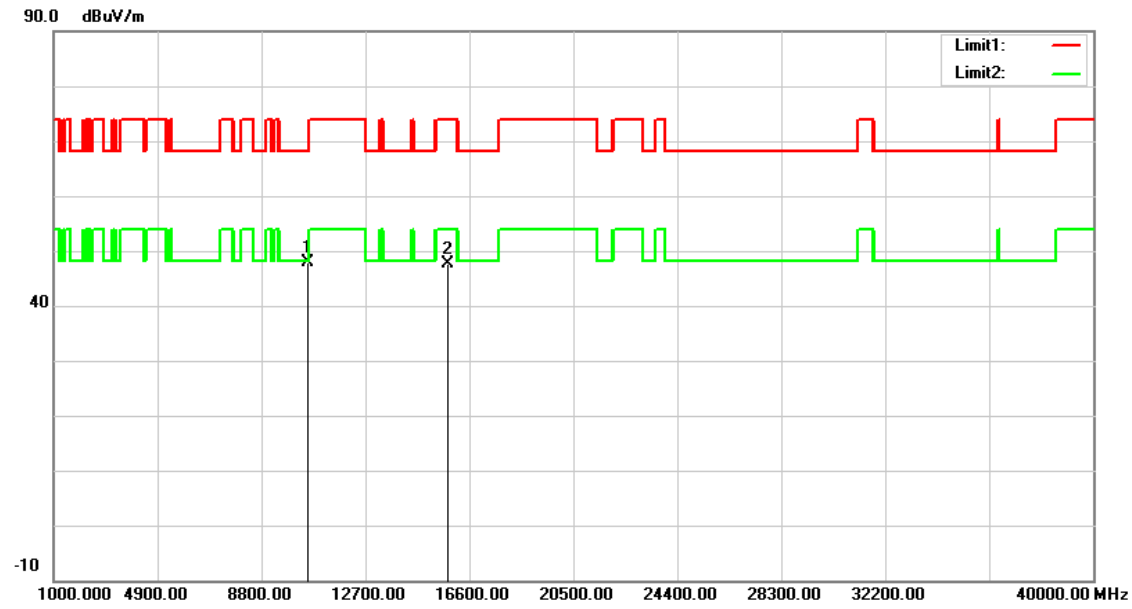


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	33.21	14.58	47.79	68.20	-20.41	peak
2	15810.000	31.70	15.95	47.65	74.00	-26.35	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

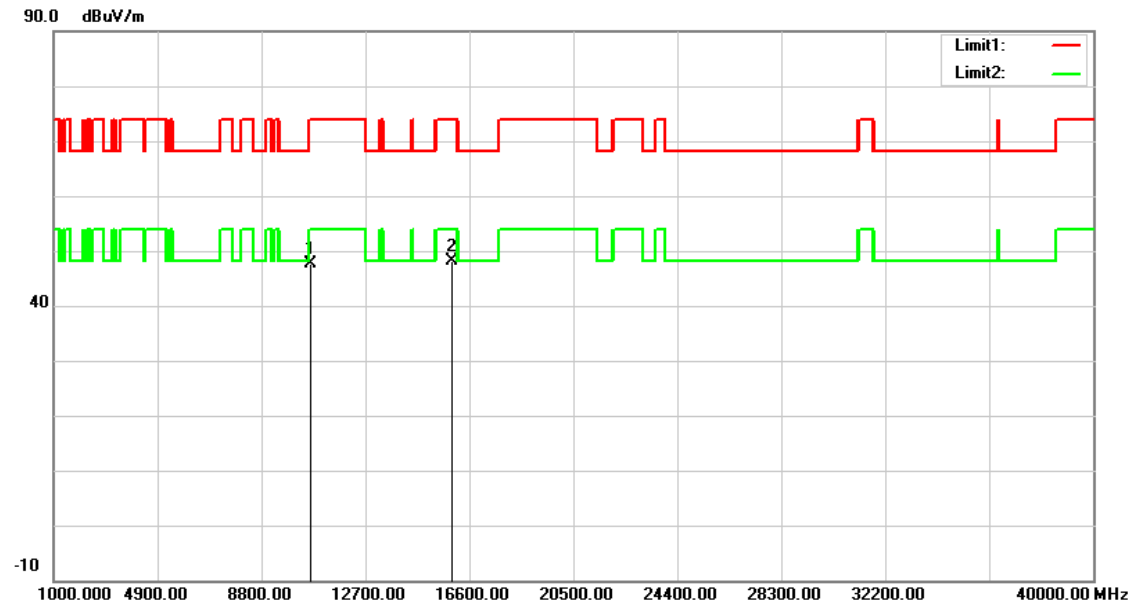


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	33.13	14.56	47.69	74.00	-26.31	peak
2	15930.000	32.66	15.55	48.21	74.00	-25.79	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

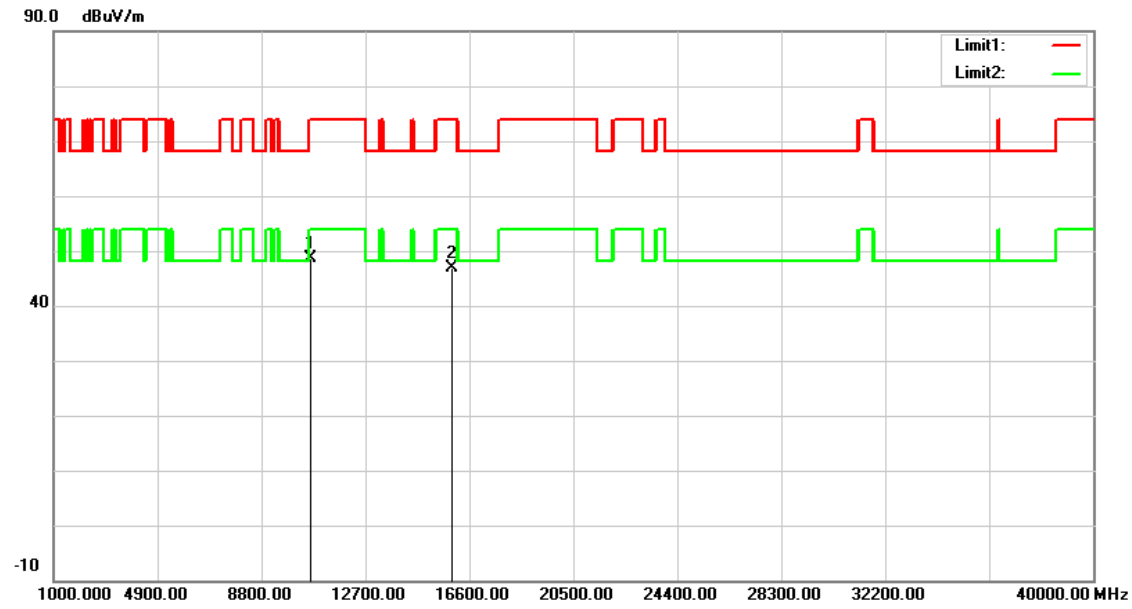


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	34.05	14.56	48.61	74.00	-25.39	peak
2	15930.000	31.44	15.55	46.99	74.00	-27.01	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

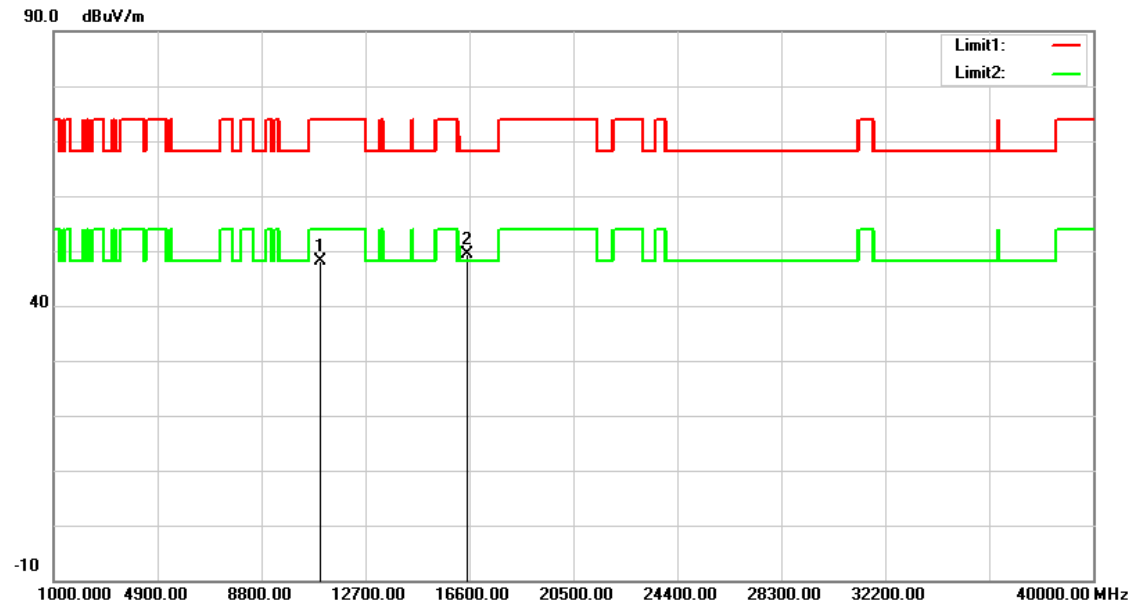


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	33.53	14.51	48.04	74.00	-25.96	peak
2	16530.000	32.57	16.85	49.42	68.20	-18.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

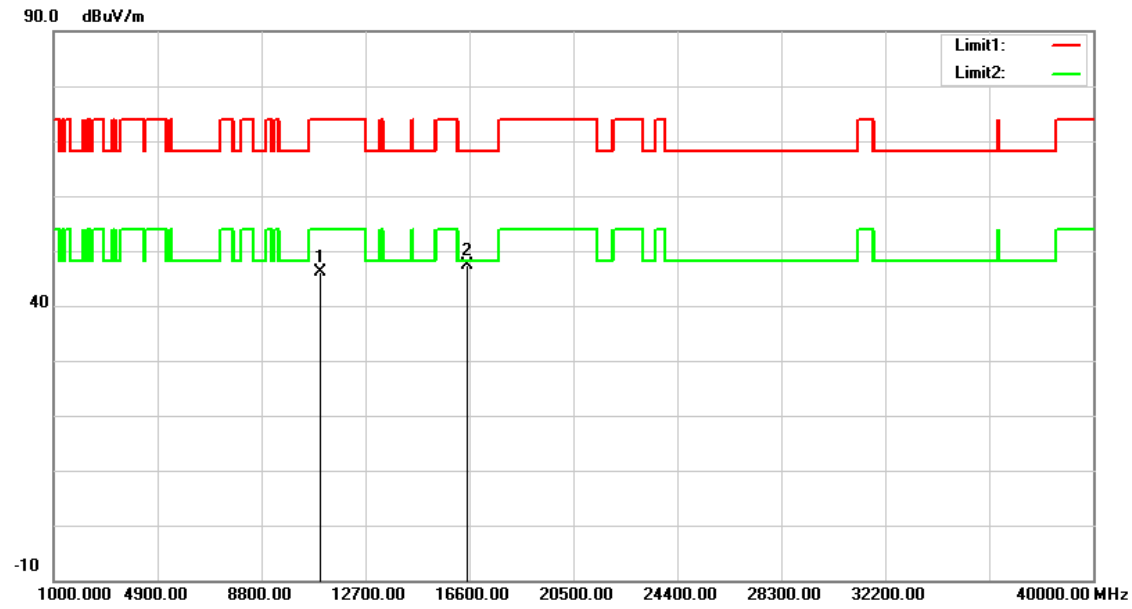


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	31.62	14.51	46.13	74.00	-27.87	peak
2	16530.000	30.65	16.85	47.50	68.20	-20.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

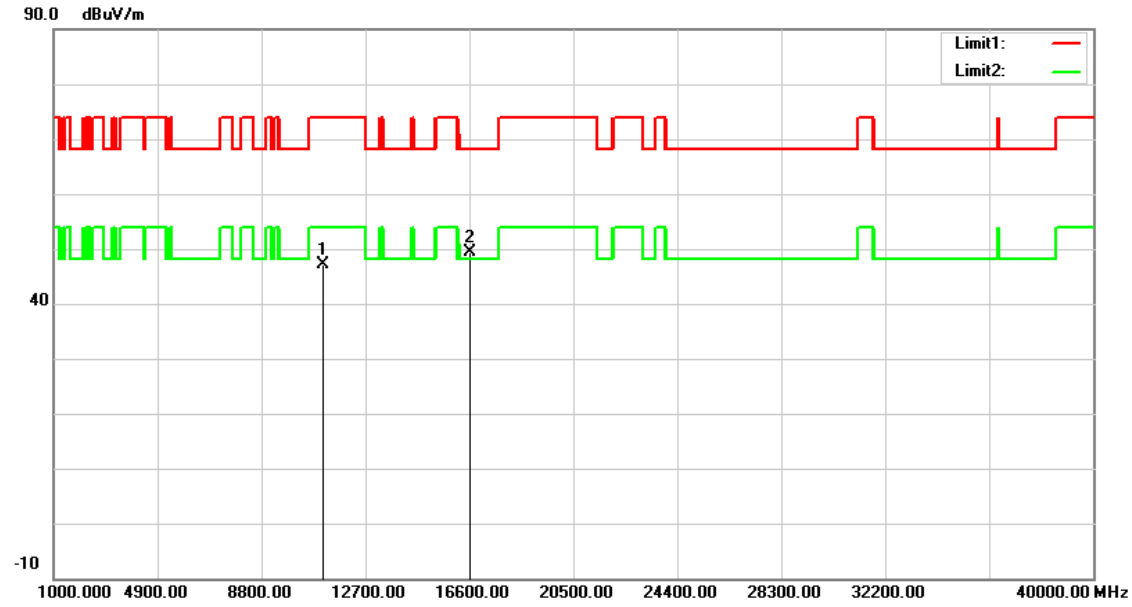


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	32.58	14.66	47.24	74.00	-26.76	peak
2	16650.000	31.74	17.73	49.47	68.20	-18.73	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

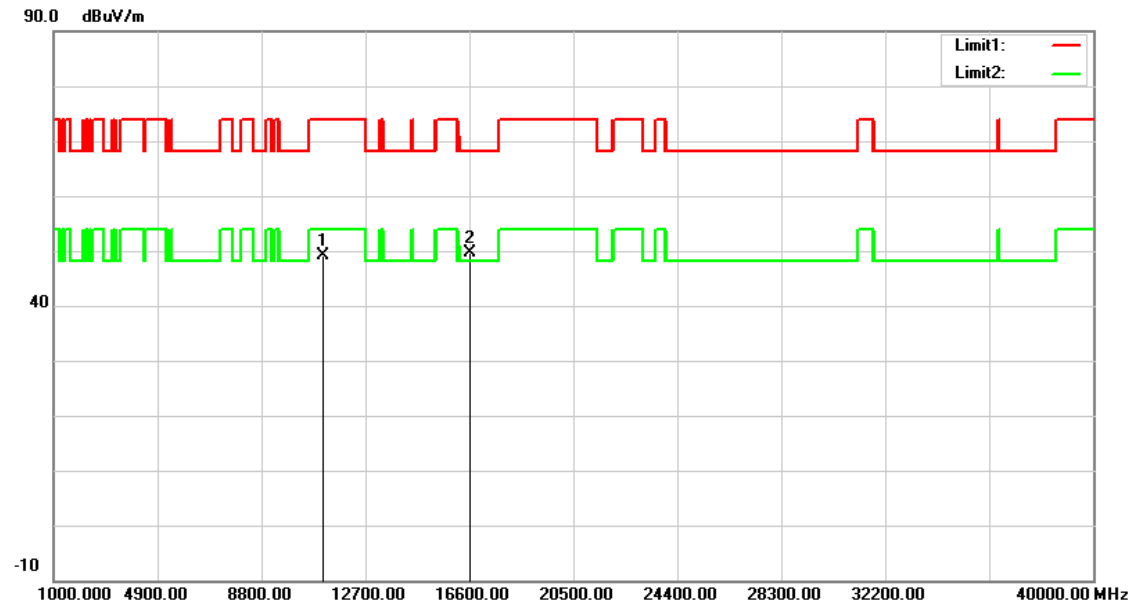


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	34.39	14.66	49.05	74.00	-24.95	peak
2	16650.000	31.96	17.73	49.69	68.20	-18.51	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

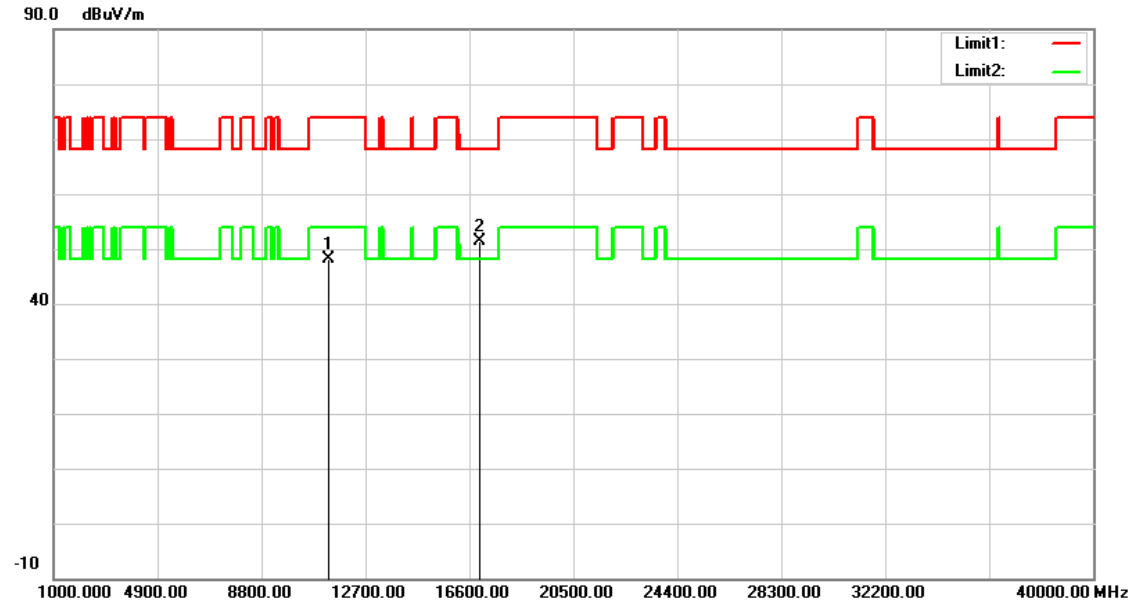


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	32.90	15.11	48.01	74.00	-25.99	peak
2	17010.000	31.07	20.36	51.43	68.20	-16.77	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

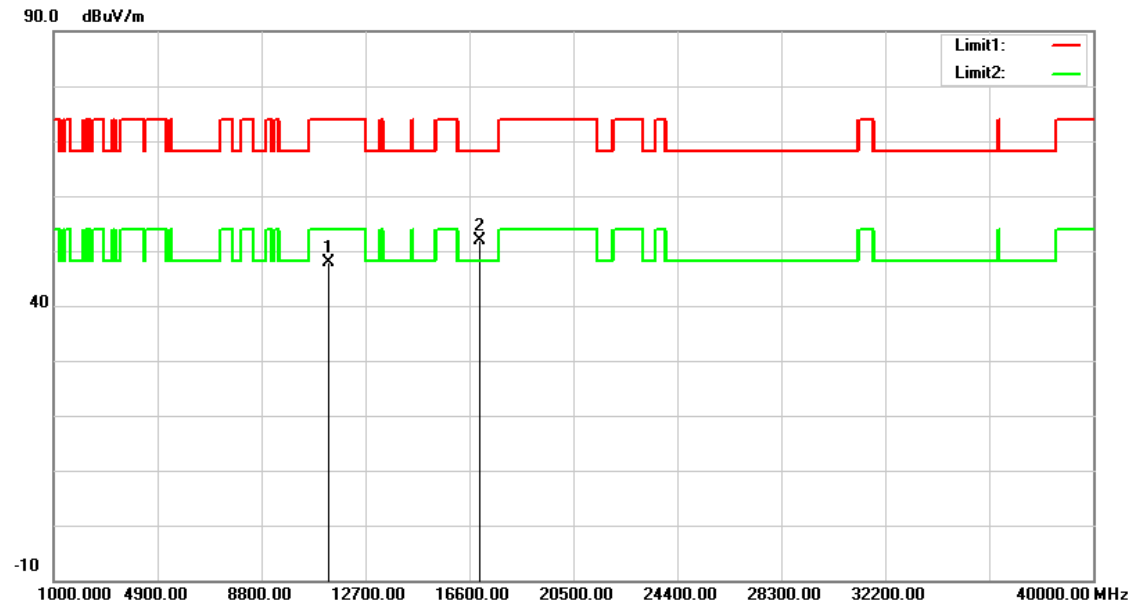


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	32.82	15.11	47.93	74.00	-26.07	peak
2	17010.000	31.53	20.36	51.89	68.20	-16.31	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

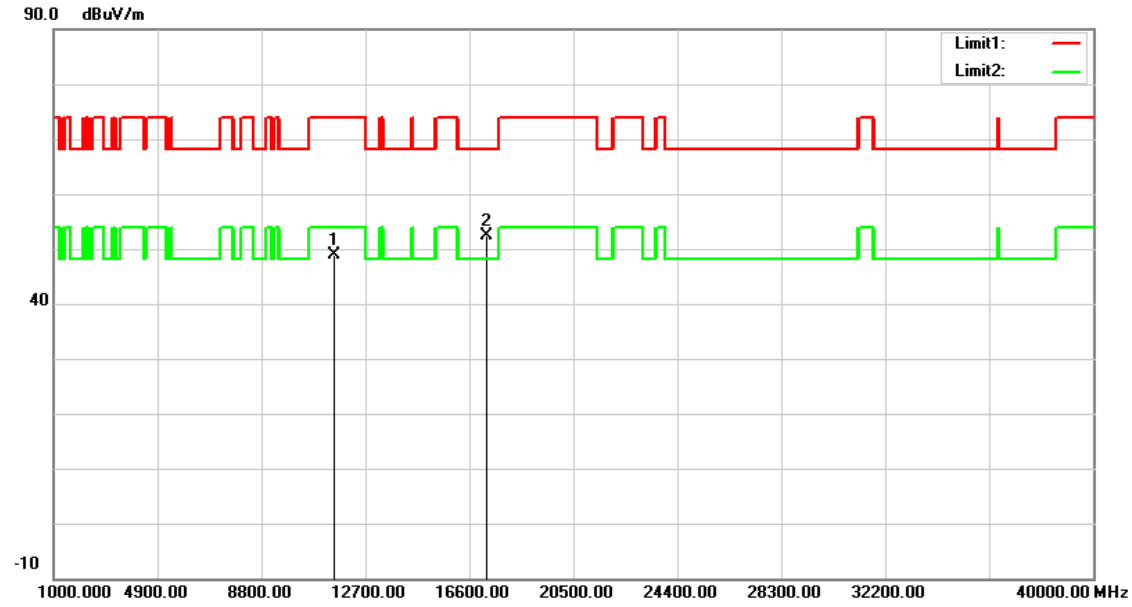


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	33.42	15.38	48.80	74.00	-25.20	peak
2	17265.000	30.62	21.88	52.50	68.20	-15.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

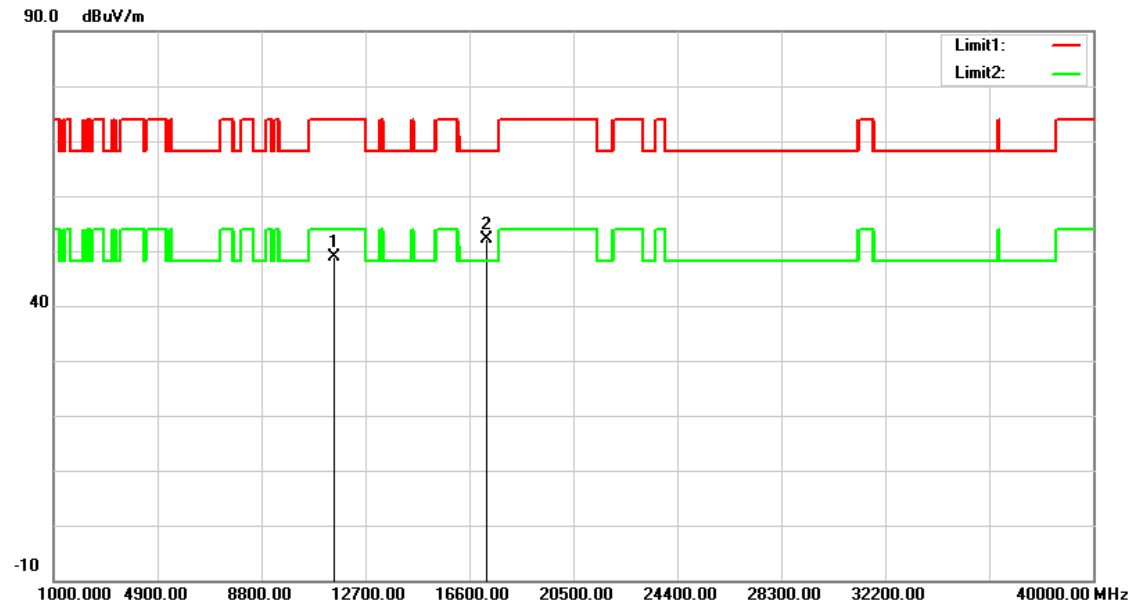


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	33.38	15.38	48.76	74.00	-25.24	peak
2	17265.000	30.31	21.88	52.19	68.20	-16.01	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

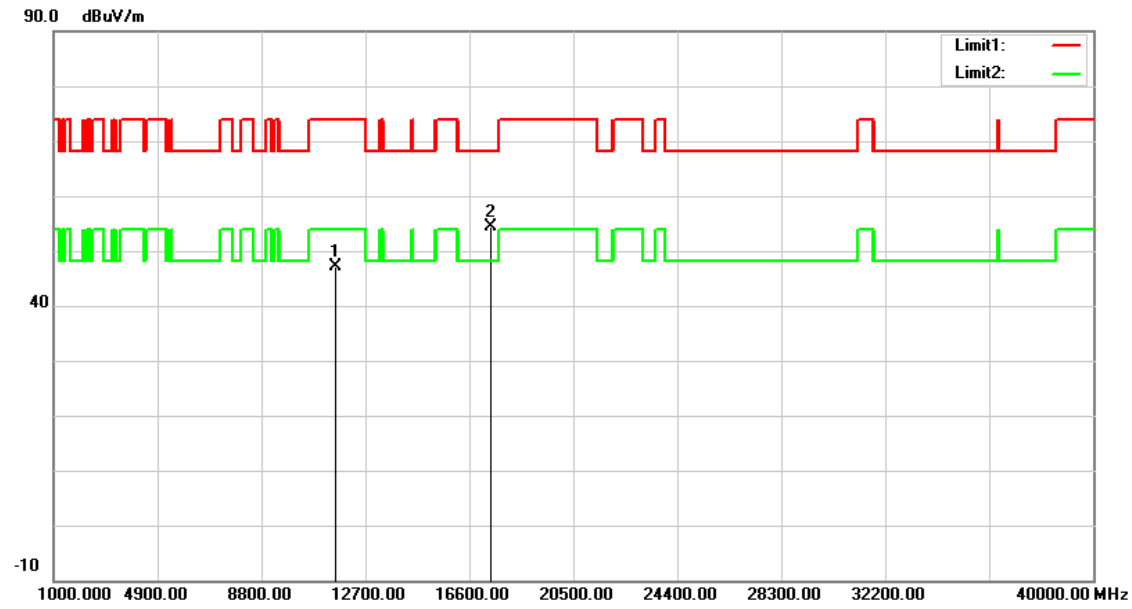


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	31.89	15.20	47.09	74.00	-26.91	peak
2	17385.000	31.80	22.60	54.40	68.20	-13.80	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

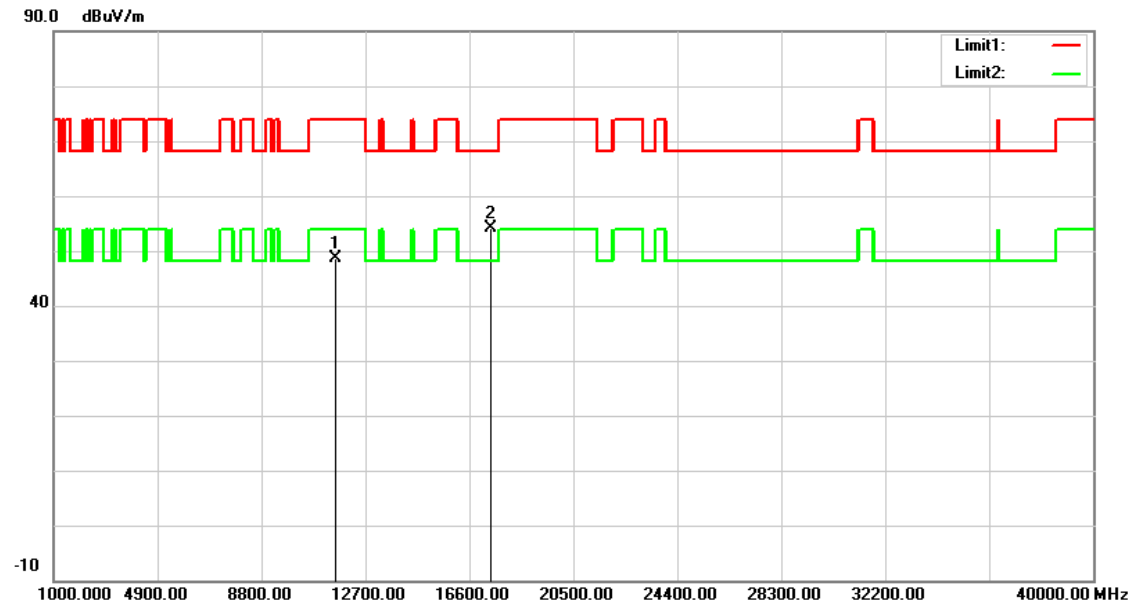


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	33.49	15.20	48.69	74.00	-25.31	peak
2	17385.000	31.61	22.60	54.21	68.20	-13.99	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

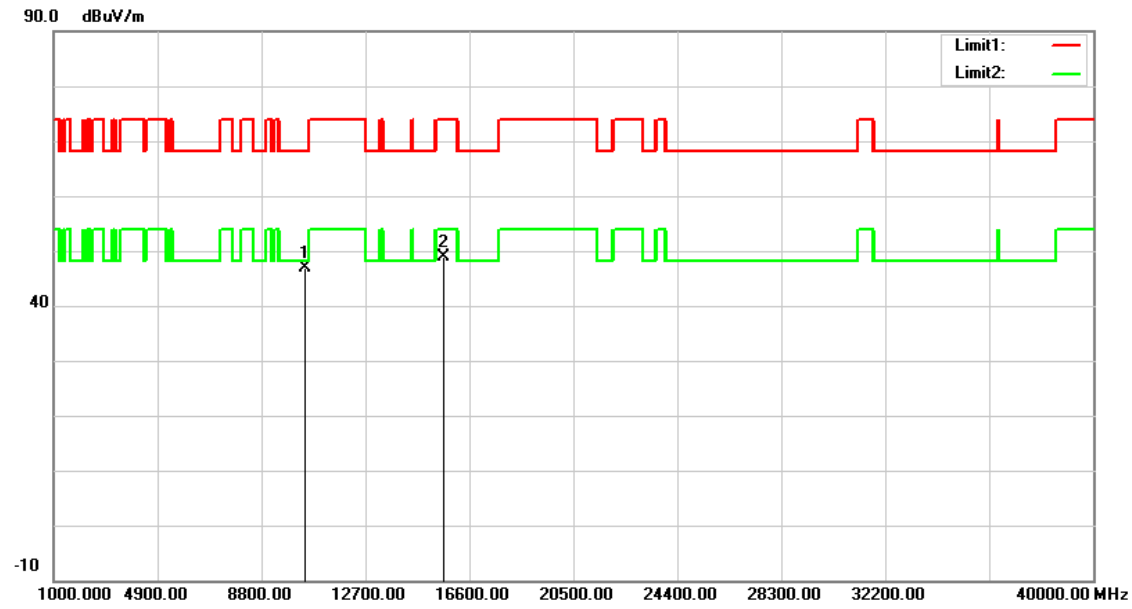


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	32.51	14.42	46.93	68.20	-21.27	peak
2	15630.000	32.44	16.56	49.00	74.00	-25.00	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

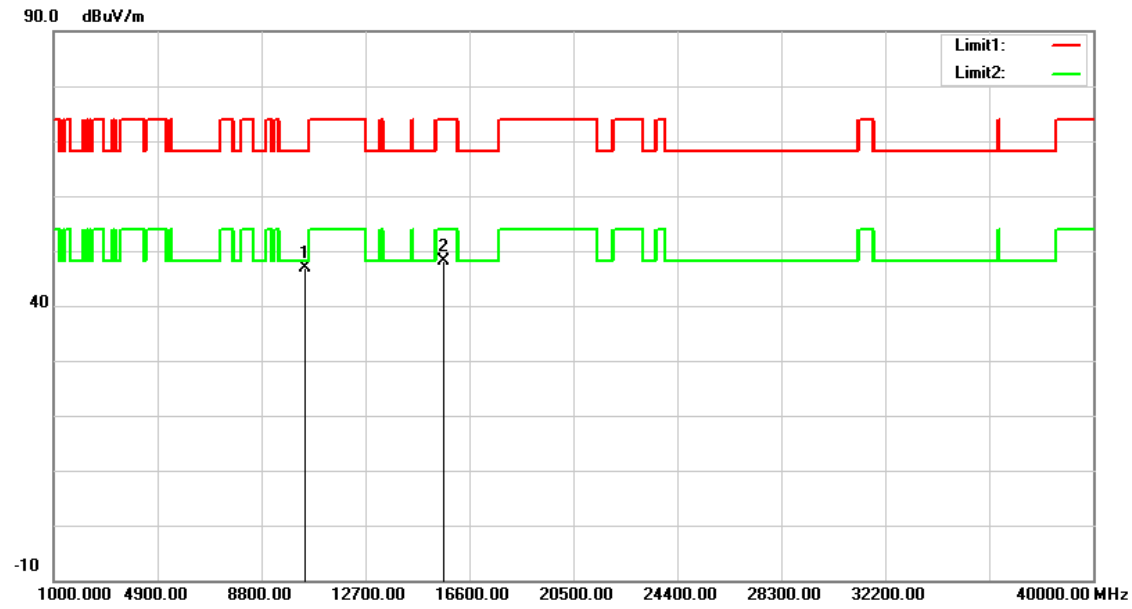


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	32.53	14.42	46.95	68.20	-21.25	peak
2	15630.000	31.66	16.56	48.22	74.00	-25.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

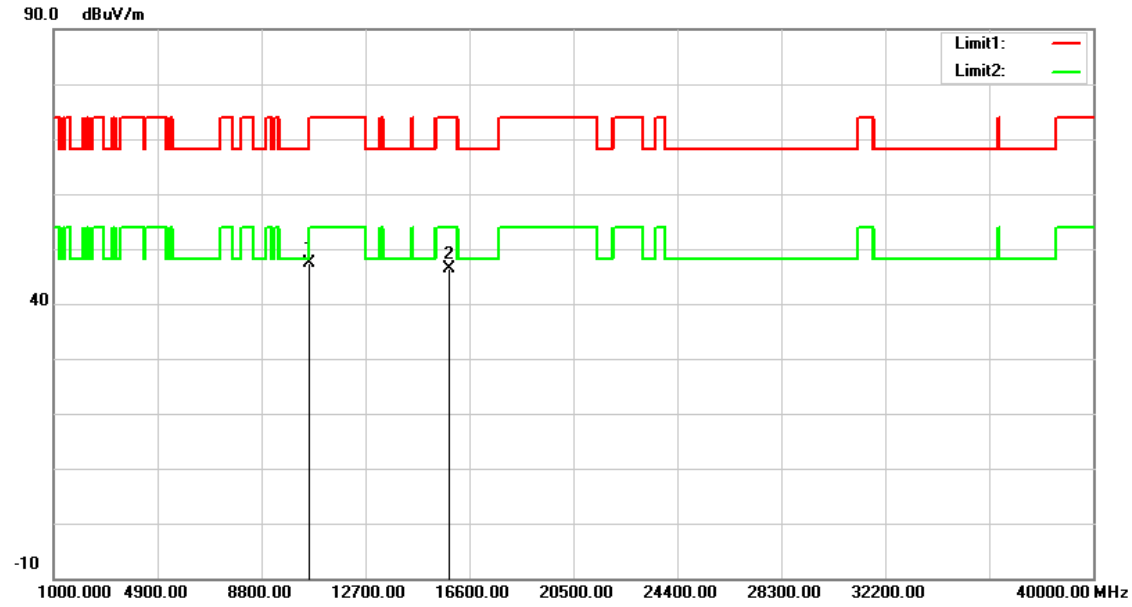


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	32.70	14.57	47.27	68.20	-20.93	peak
2	15870.000	30.70	15.74	46.44	74.00	-27.56	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

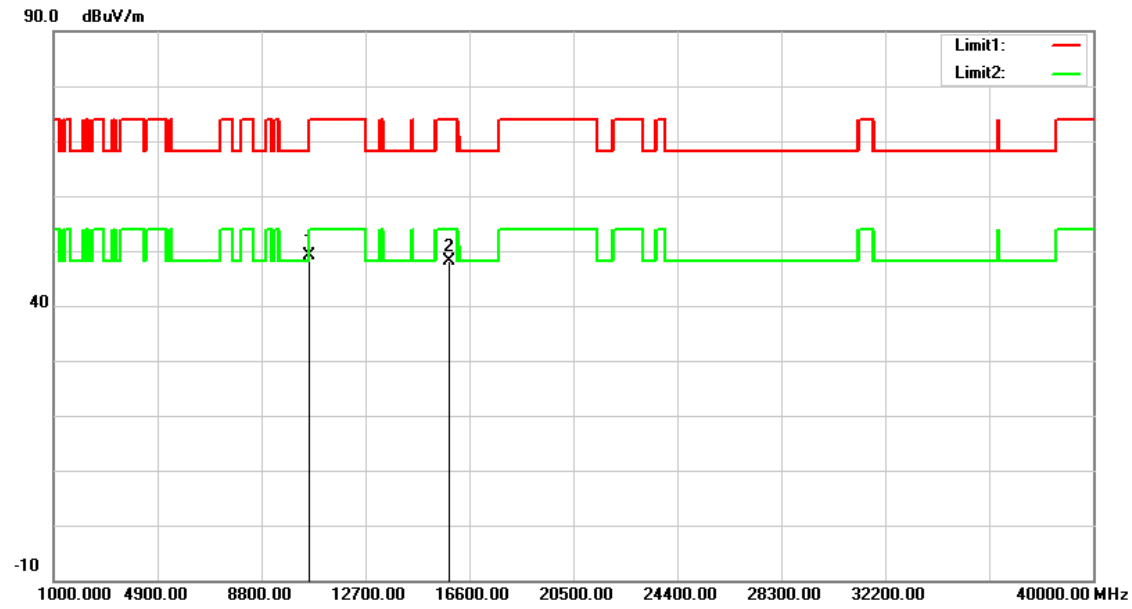


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	34.44	14.57	49.01	68.20	-19.19	peak
2	15870.000	32.40	15.74	48.14	74.00	-25.86	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

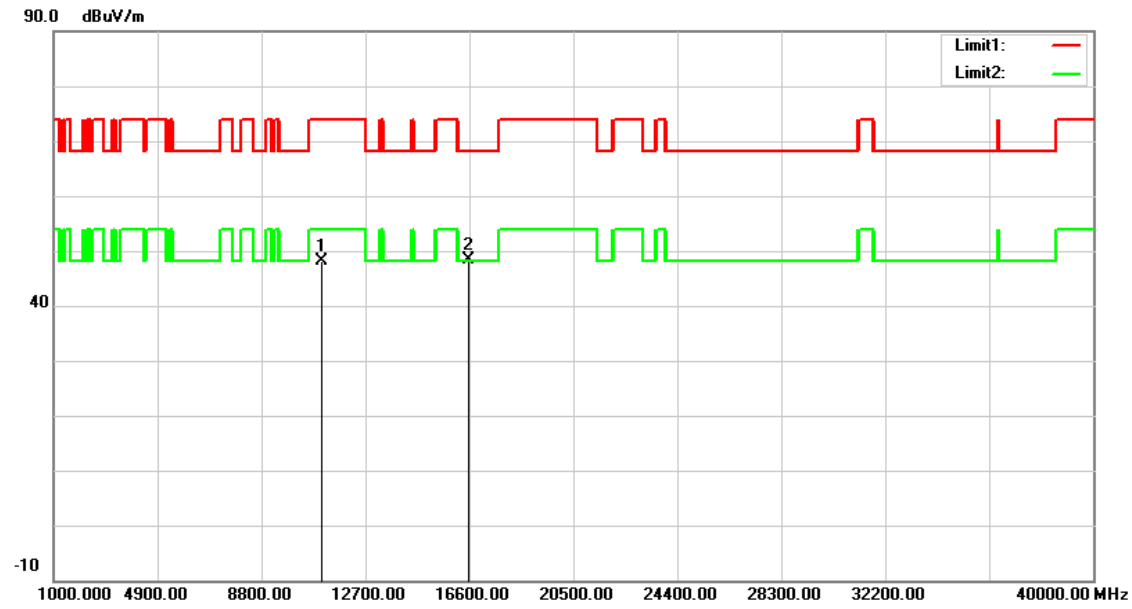


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	33.47	14.58	48.05	74.00	-25.95	peak
2	16590.000	31.20	17.29	48.49	68.20	-19.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

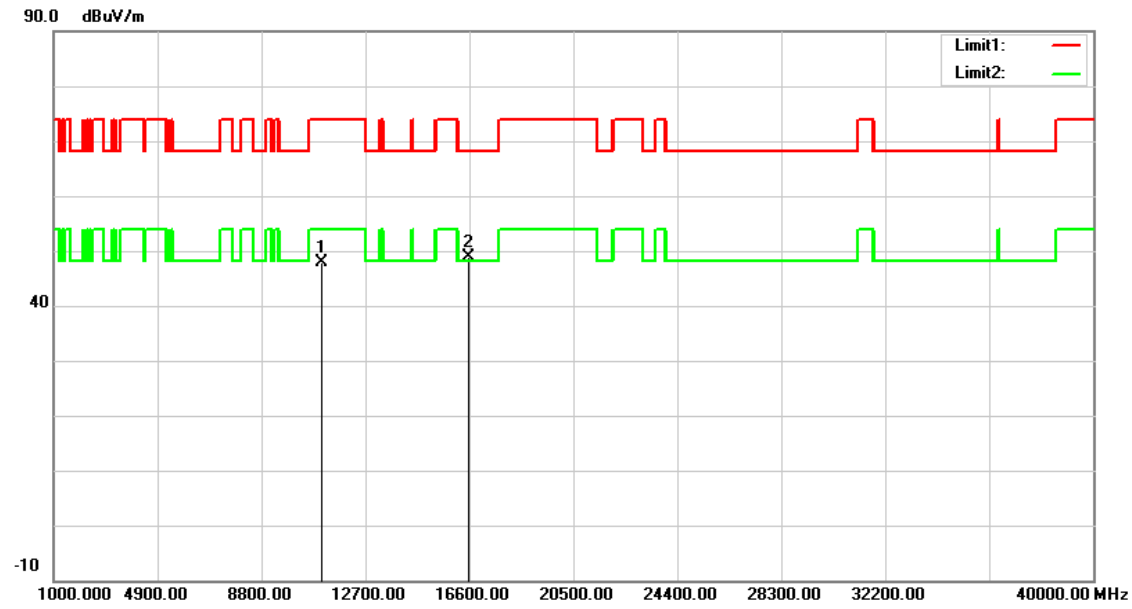


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	33.28	14.58	47.86	74.00	-26.14	peak
2	16590.000	31.53	17.29	48.82	68.20	-19.38	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5610 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

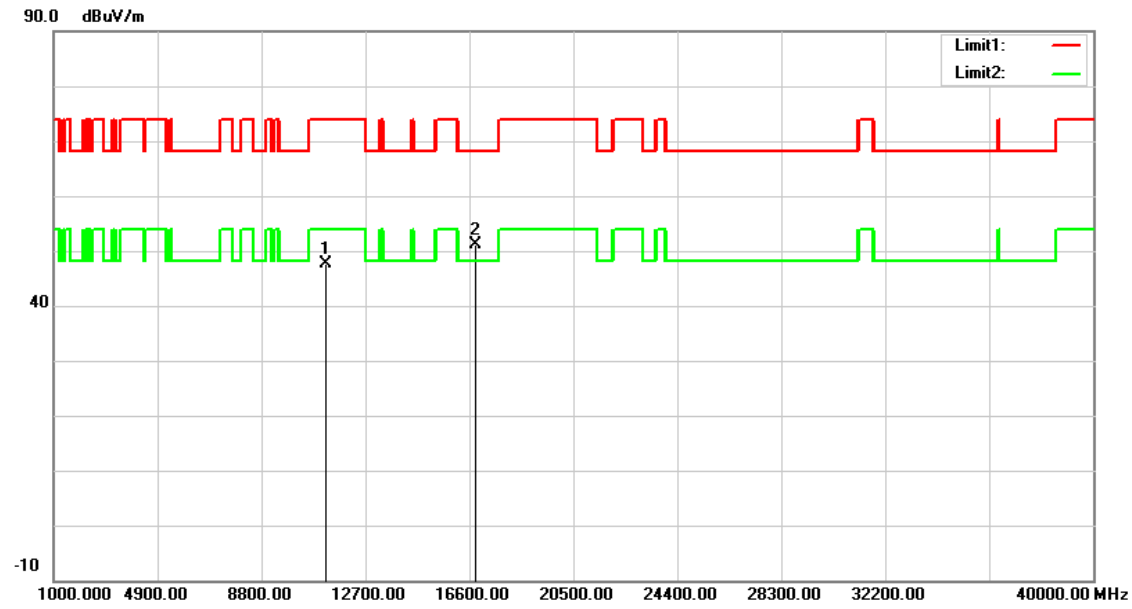


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	32.74	14.89	47.63	74.00	-26.37	peak
2	16830.000	32.08	19.06	51.14	68.20	-17.06	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5610 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

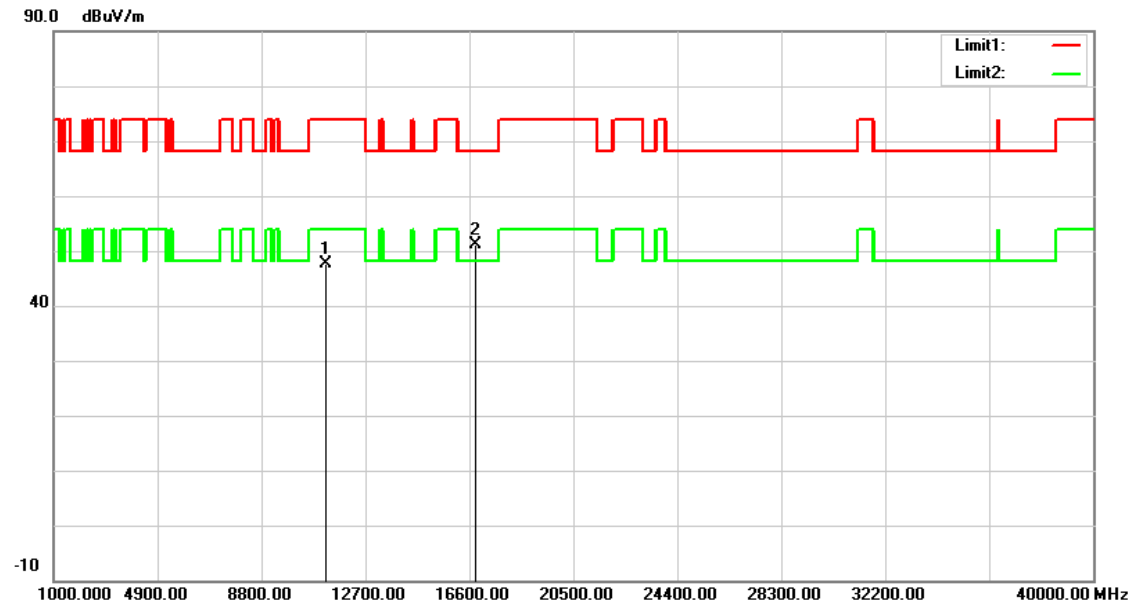


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	32.86	14.89	47.75	74.00	-26.25	peak
2	16830.000	32.05	19.06	51.11	68.20	-17.09	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

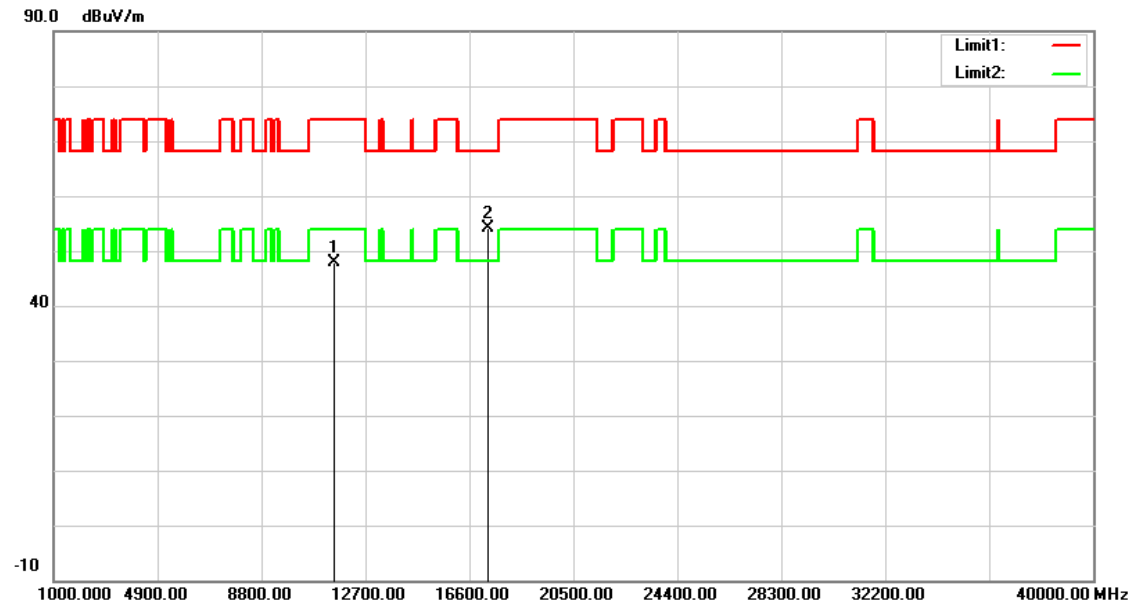


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	32.60	15.29	47.89	74.00	-26.11	peak
2	17325.000	31.90	22.24	54.14	68.20	-14.06	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

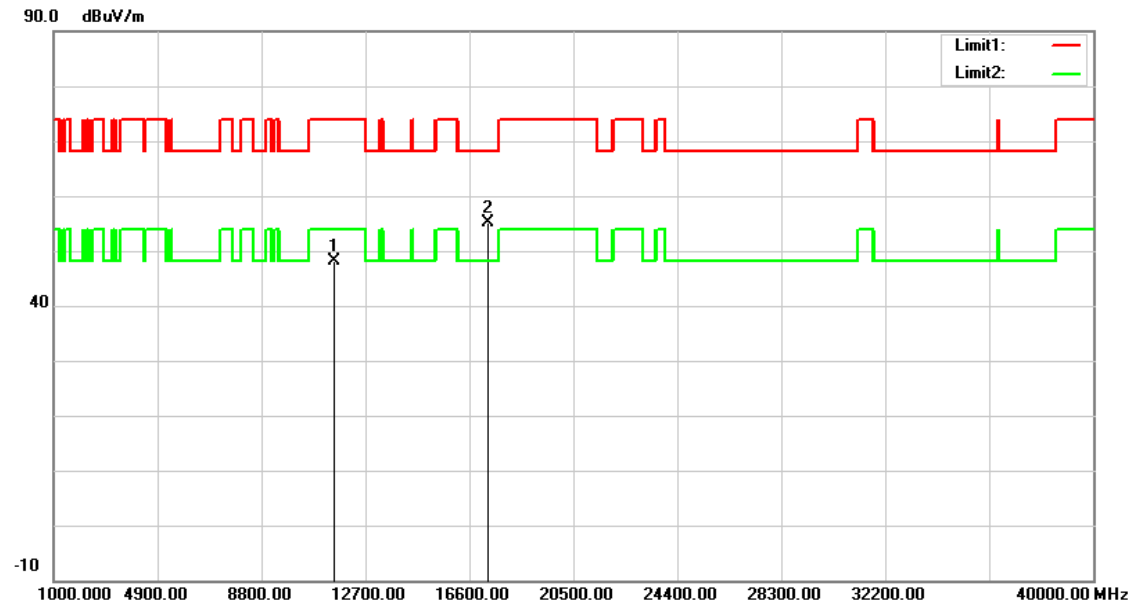


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	32.73	15.29	48.02	74.00	-25.98	peak
2	17325.000	32.77	22.24	55.01	68.20	-13.19	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting		
	(Bluetooth + WLAN 5 GHz)		
Ant.Polar.:	Horizontal		

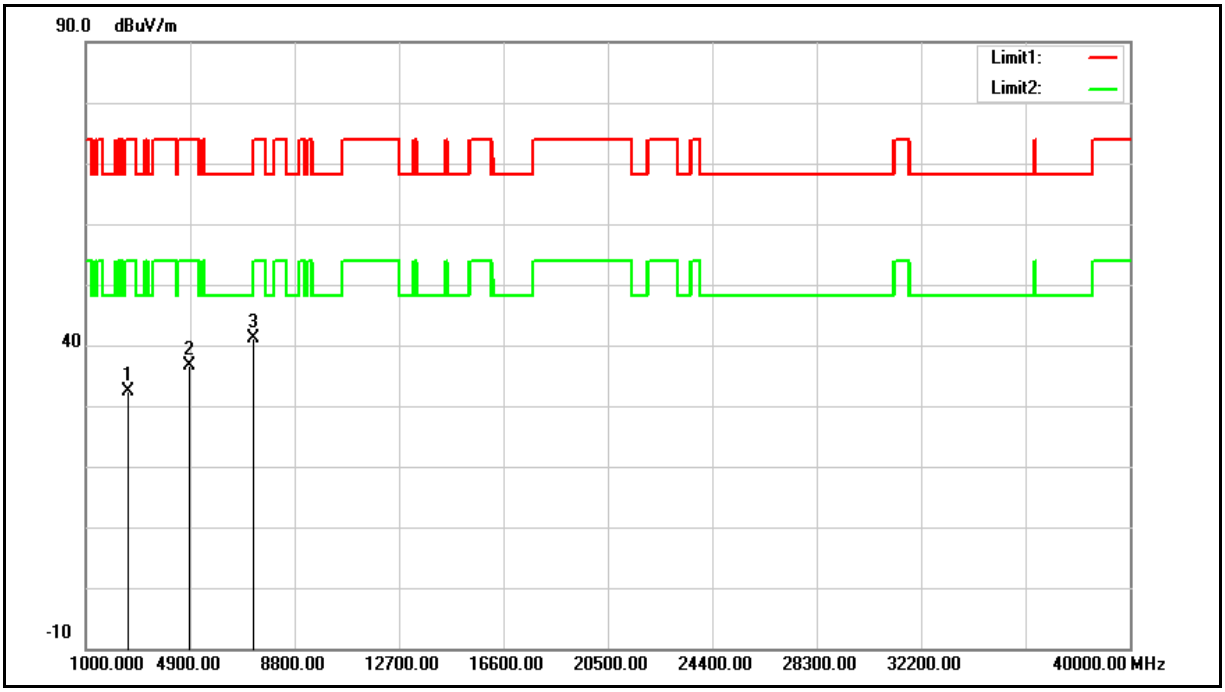


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2598.000	39.00	-6.56	32.44	74.00	-41.56	peak
2	4825.000	37.53	-0.97	36.56	74.00	-37.44	peak
3	7273.000	34.74	6.30	41.04	74.00	-32.96	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting		
	(Bluetooth + WLAN 5 GHz)		
Ant.Polar.:	Vertical		

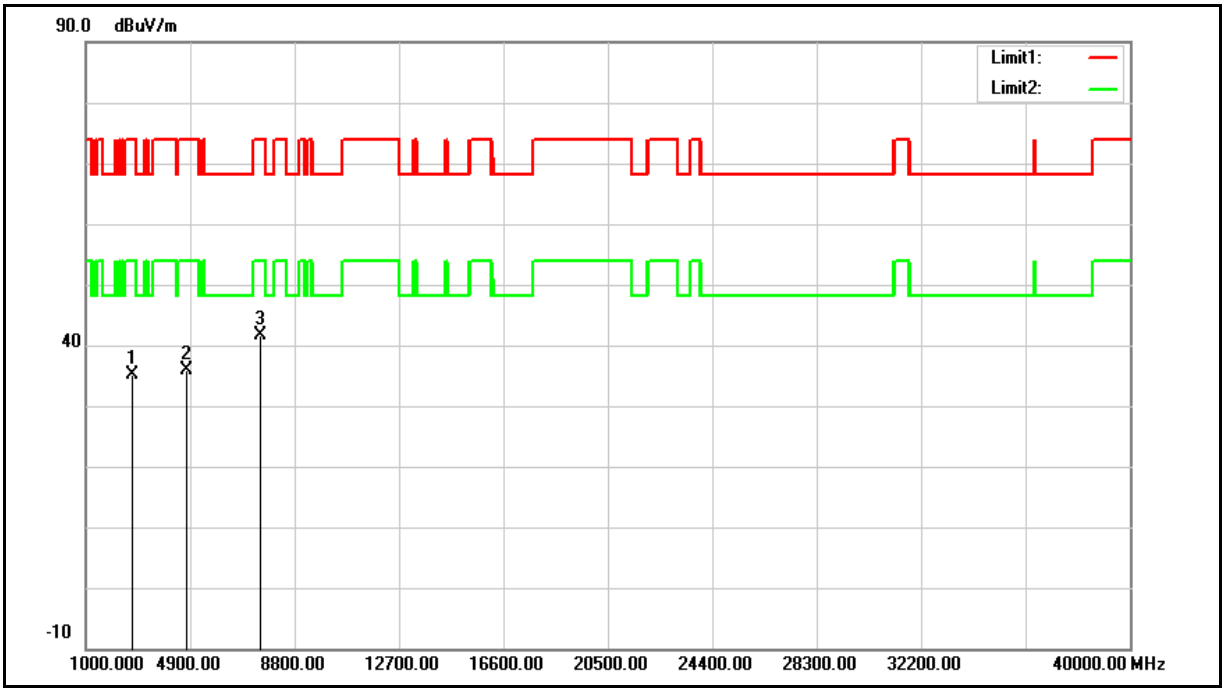


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2717.000	41.26	-6.21	35.05	74.00	-38.95	peak
2	4757.000	37.03	-1.21	35.82	74.00	-38.18	peak
3	7477.000	34.62	7.11	41.73	74.00	-32.27	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		
Description:			

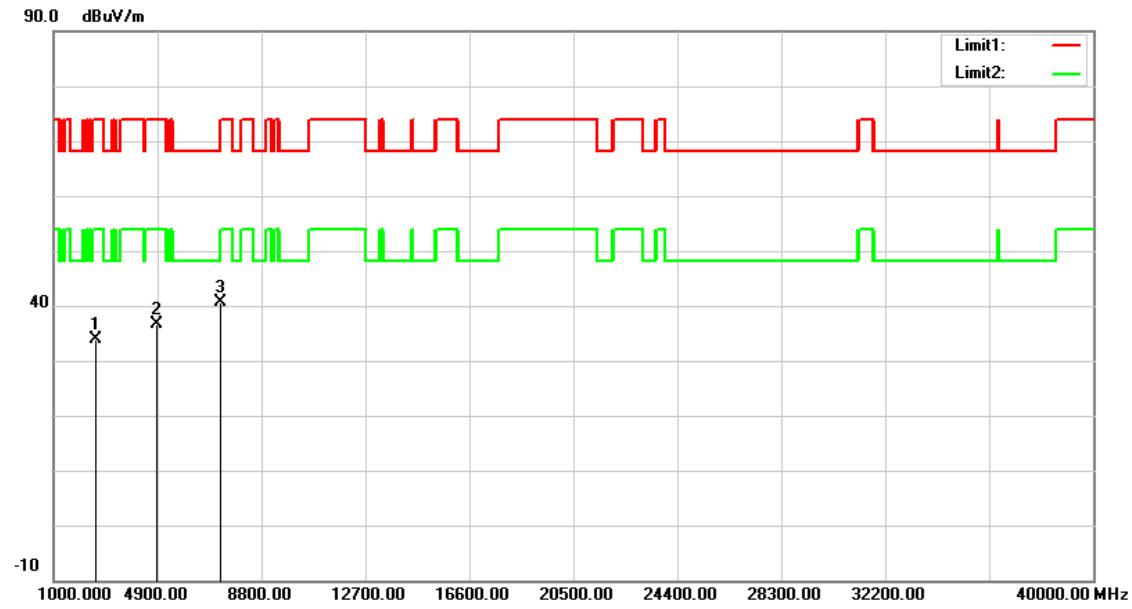


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2598.000	40.53	-6.56	33.97	74.00	-40.03	peak
2	4825.000	37.69	-0.97	36.72	74.00	-37.28	peak
3	7273.000	34.42	6.30	40.72	74.00	-33.28	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 12		
Ant.Polar.:	Vertical		
Description:			

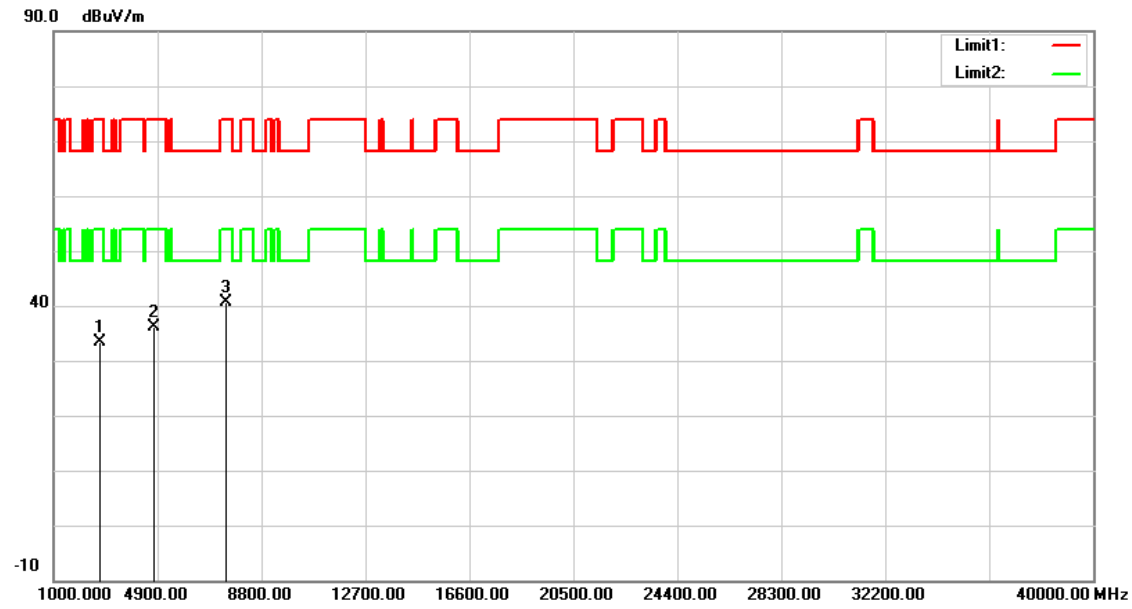

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2717.000	39.66	-6.21	33.45	74.00	-40.55	peak
2	4757.000	37.39	-1.21	36.18	74.00	-37.82	peak
3	7477.000	33.43	7.11	40.54	74.00	-33.46	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

頻帶邊緣

Peak

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

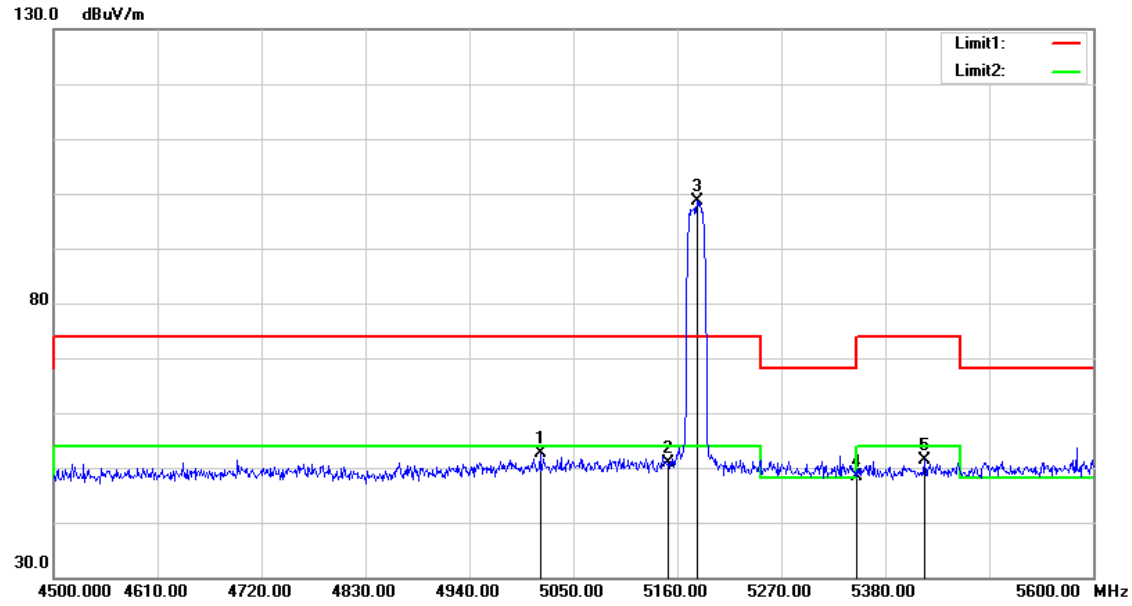


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5014.800	52.95	-0.33	52.62	74.00	-21.38	peak
2	5150.000	50.96	-0.08	50.88	74.00	-23.12	peak
3	5180.900	98.71	-0.03	98.68	74.00	24.68	peak
4	5350.000	48.01	0.30	48.31	74.00	-25.69	peak
5	5421.800	50.86	0.43	51.29	74.00	-22.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

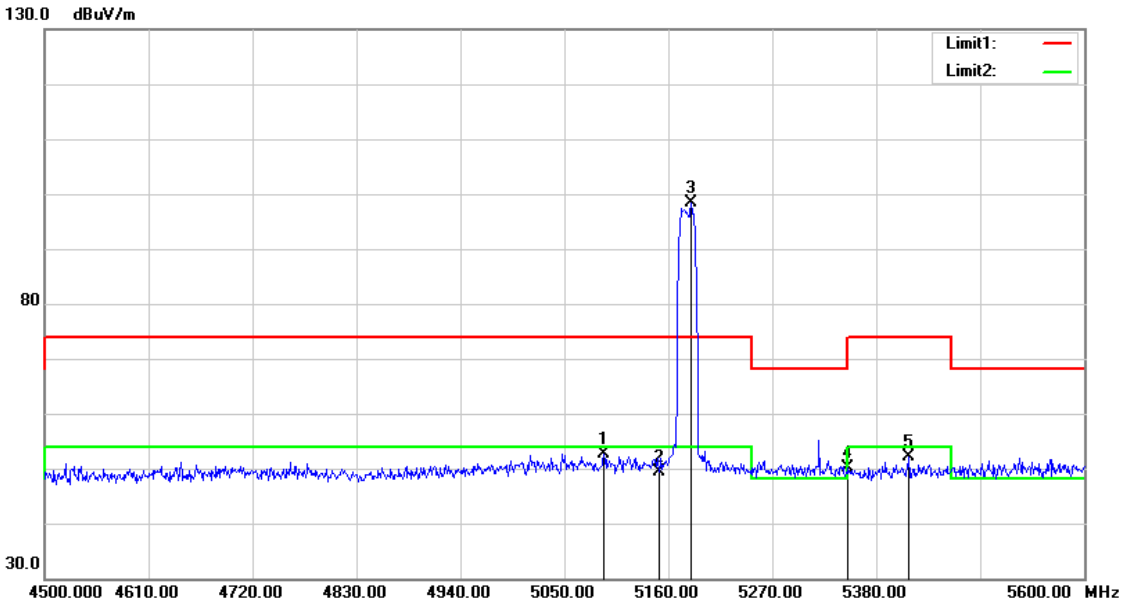


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5091.800	52.83	-0.19	52.64	74.00	-21.36	peak
2	5150.000	49.49	-0.08	49.41	74.00	-24.59	peak
3	5184.200	98.49	-0.02	98.47	74.00	24.47	peak
4	5350.000	49.79	0.30	50.09	74.00	-23.91	peak
5	5414.100	51.73	0.41	52.14	74.00	-21.86	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

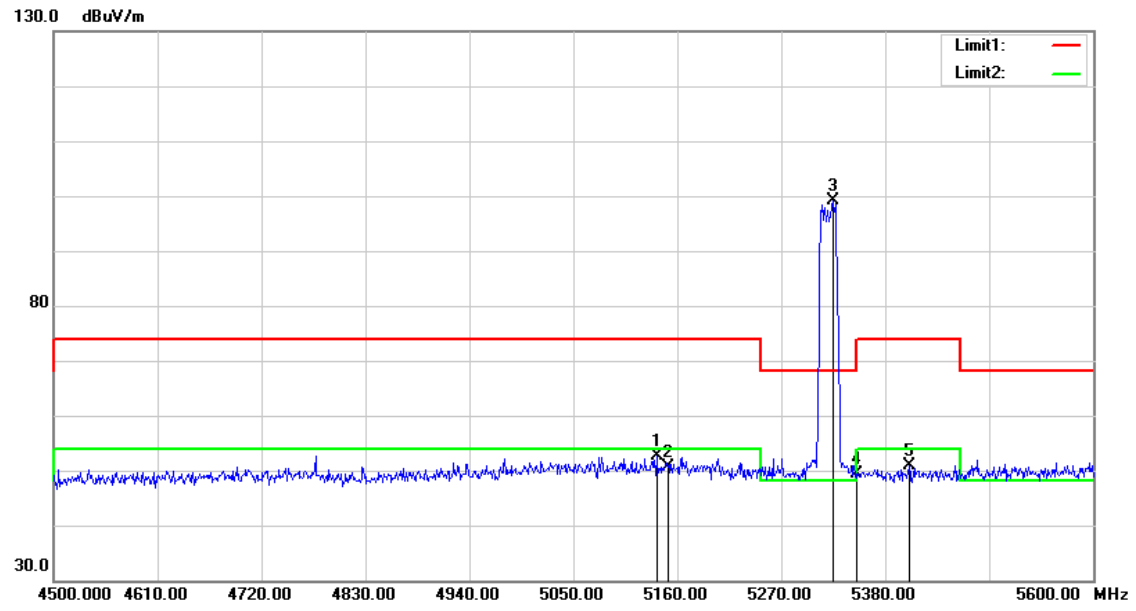


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5138.000	52.73	-0.10	52.63	74.00	-21.37	peak
2	5150.000	50.79	-0.08	50.71	74.00	-23.29	peak
3	5325.000	98.91	0.25	99.16	68.20	30.96	peak
4	5350.000	49.16	0.30	49.46	74.00	-24.54	peak
5	5405.300	50.46	0.40	50.86	74.00	-23.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

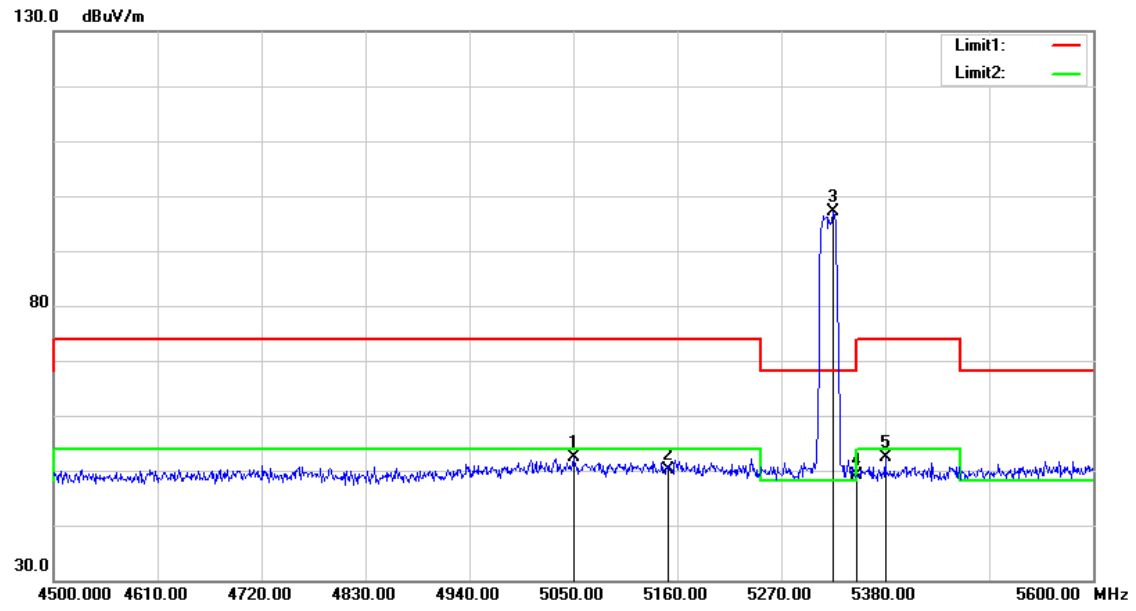


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5050.000	52.73	-0.26	52.47	74.00	-21.53	peak
2	5150.000	50.12	-0.08	50.04	74.00	-23.96	peak
3	5325.000	96.77	0.25	97.02	68.20	28.82	peak
4	5350.000	48.71	0.30	49.01	74.00	-24.99	peak
5	5380.000	51.92	0.35	52.27	74.00	-21.73	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

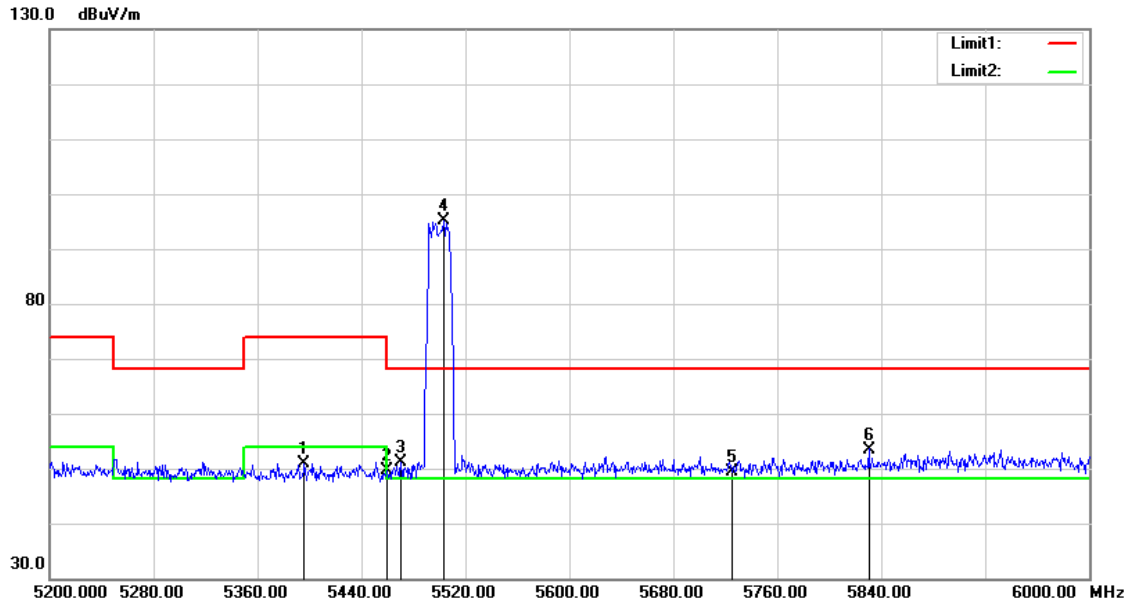


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5396.000	50.61	0.38	50.99	74.00	-23.01	peak
2	5460.000	49.12	0.51	49.63	74.00	-24.37	peak
3	5470.000	50.70	0.52	51.22	68.20	-16.98	peak
4	5503.200	94.48	0.58	95.06	68.20	26.86	peak
5	5725.000	48.22	1.18	49.40	68.20	-18.80	peak
6	5830.400	52.03	1.47	53.50	68.20	-14.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

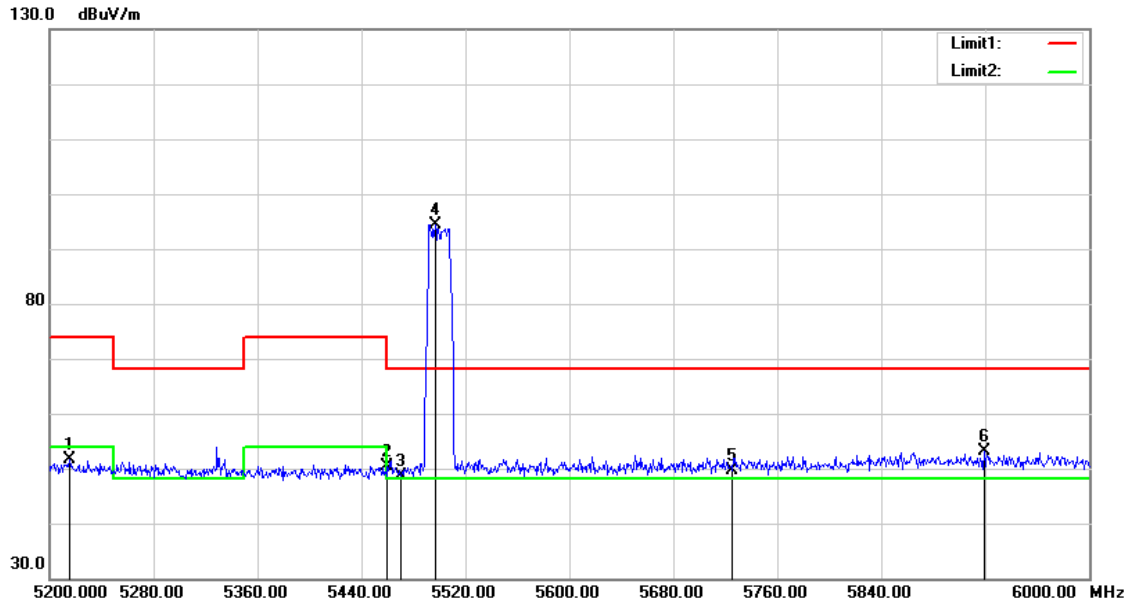


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5215.200	51.51	0.04	51.55	74.00	-22.45	peak
2	5460.000	49.87	0.51	50.38	74.00	-23.62	peak
3	5470.000	48.02	0.52	48.54	68.20	-19.66	peak
4	5496.800	93.80	0.57	94.37	68.20	26.17	peak
5	5725.000	48.47	1.18	49.65	68.20	-18.55	peak
6	5919.200	51.55	1.70	53.25	68.20	-14.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

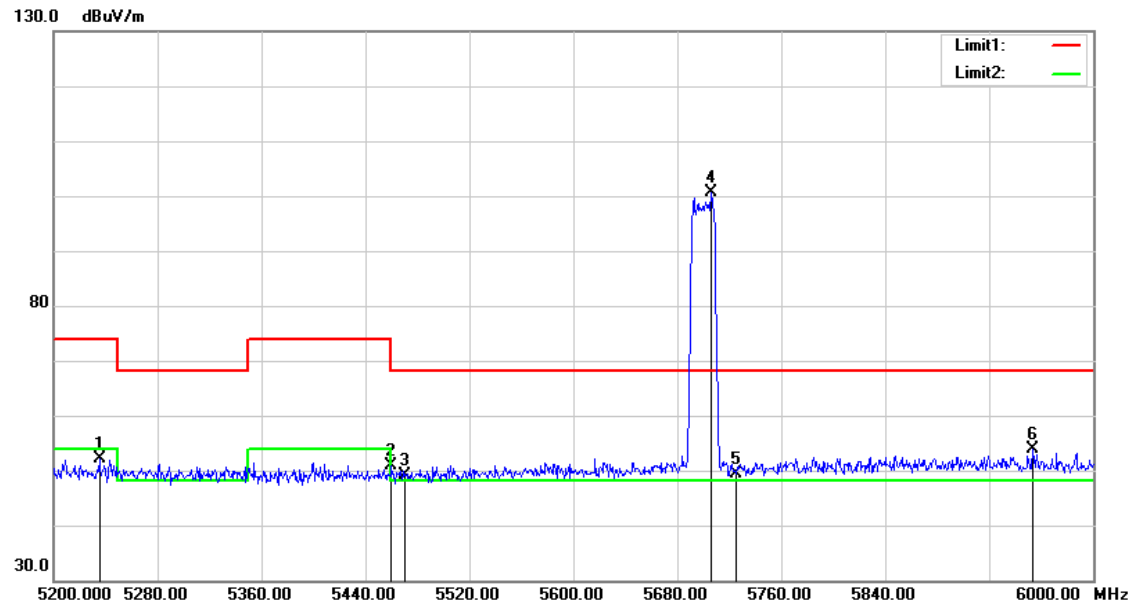


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5235.200	51.93	0.08	52.01	74.00	-21.99	peak
2	5460.000	50.33	0.51	50.84	74.00	-23.16	peak
3	5470.000	48.69	0.52	49.21	68.20	-18.99	peak
4	5706.400	99.53	1.14	100.67	68.20	32.47	peak
5	5725.000	48.22	1.18	49.40	68.20	-18.80	peak
6	5953.600	52.11	1.79	53.90	68.20	-14.30	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

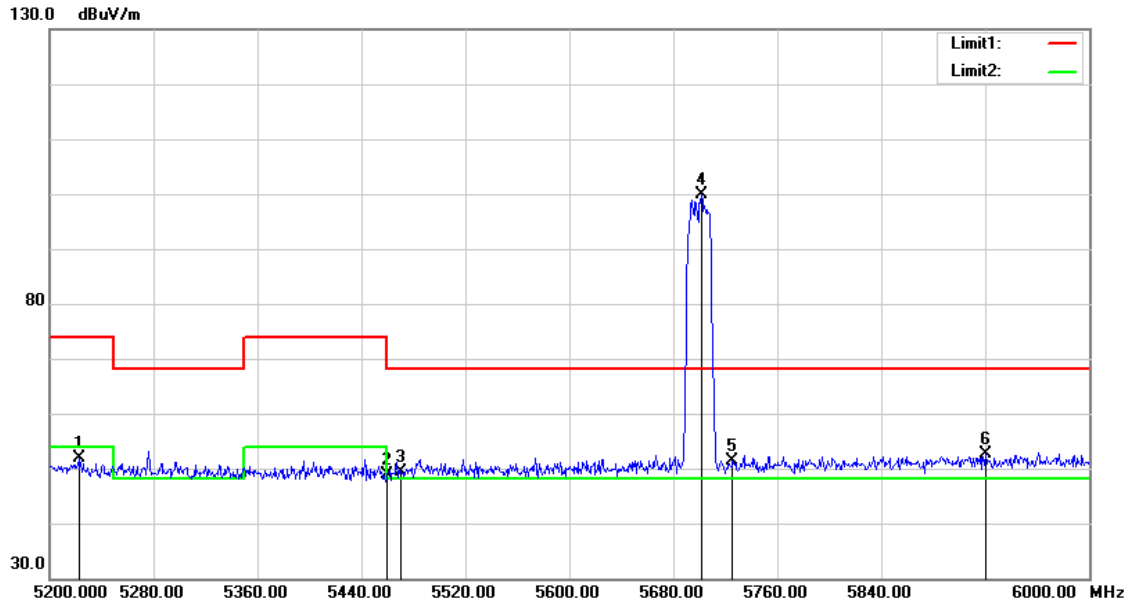


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5222.400	51.79	0.06	51.85	74.00	-22.15	peak
2	5460.000	48.26	0.51	48.77	74.00	-25.23	peak
3	5470.000	48.78	0.52	49.30	68.20	-18.90	peak
4	5701.600	98.83	1.11	99.94	68.20	31.74	peak
5	5725.000	50.13	1.18	51.31	68.20	-16.89	peak
6	5920.000	50.94	1.70	52.64	68.20	-15.56	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

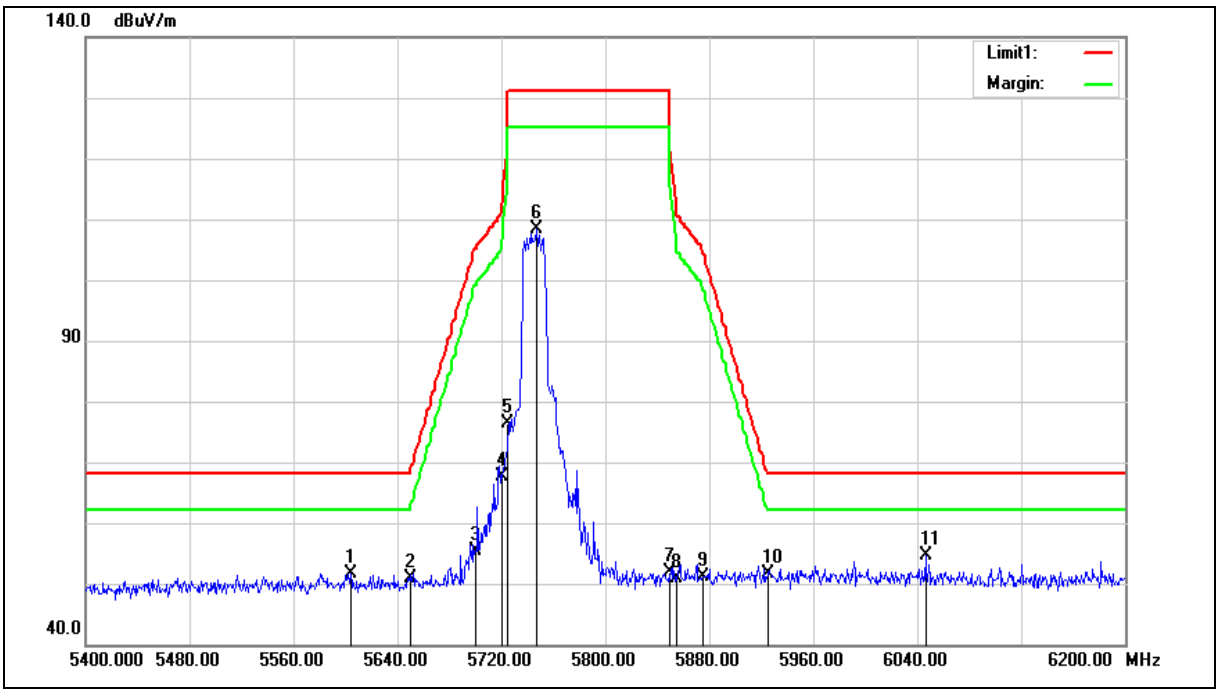

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5604.000	50.86	0.85	51.71	68.20	-16.49	peak
2	5650.000	49.87	0.97	50.84	68.20	-17.36	peak
3	5700.000	54.37	1.11	55.48	105.20	-49.72	peak
4	5720.000	66.34	1.17	67.51	110.80	-43.29	peak
5	5725.000	75.11	1.18	76.29	122.20	-45.91	peak
6	5747.200	107.13	1.25	108.38	131.20	-22.82	peak
7	5850.000	50.48	1.52	52.00	122.20	-70.20	peak
8	5855.000	49.25	1.53	50.78	110.80	-60.02	peak
9	5875.000	49.58	1.59	51.17	105.20	-54.03	peak
10	5925.000	49.97	1.72	51.69	68.20	-16.51	peak
11	6046.400	52.63	2.10	54.73	68.20	-13.47	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

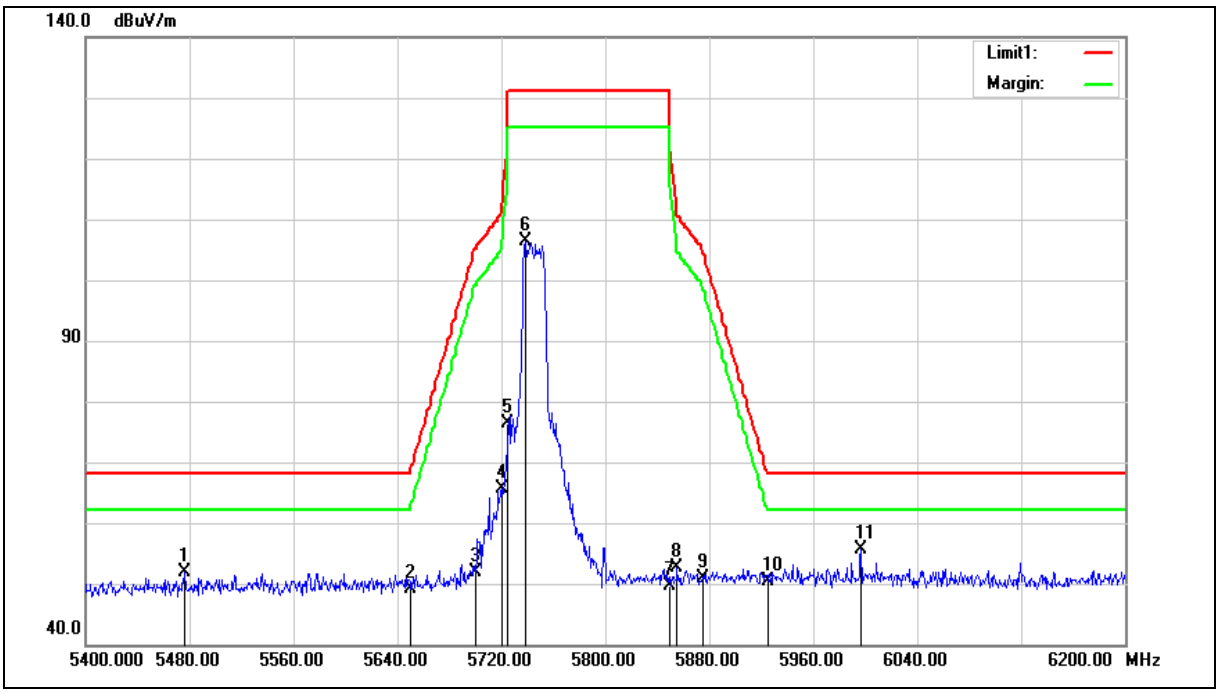

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5476.000	51.30	0.53	51.83	68.20	-16.37	peak
2	5650.000	48.15	0.97	49.12	68.20	-19.08	peak
3	5700.000	50.84	1.11	51.95	105.20	-53.25	peak
4	5720.000	64.36	1.17	65.53	110.80	-45.27	peak
5	5725.000	75.19	1.18	76.37	122.20	-45.83	peak
6	5738.400	105.14	1.22	106.36	131.20	-24.84	peak
7	5850.000	48.14	1.52	49.66	122.20	-72.54	peak
8	5855.000	51.18	1.53	52.71	110.80	-58.09	peak
9	5875.000	49.34	1.59	50.93	105.20	-54.27	peak
10	5925.000	48.71	1.72	50.43	68.20	-17.77	peak
11	5996.800	53.76	1.92	55.68	68.20	-12.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

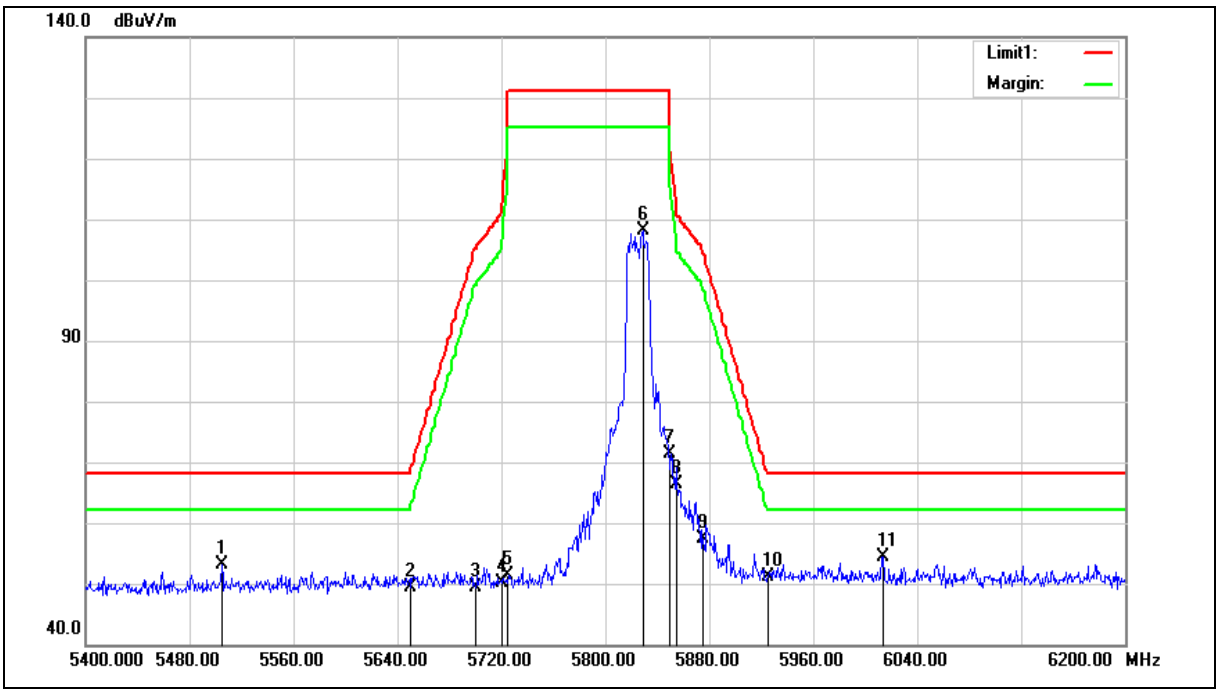

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5504.800	52.62	0.59	53.21	68.20	-14.99	peak
2	5650.000	48.31	0.97	49.28	68.20	-18.92	peak
3	5700.000	48.31	1.11	49.42	105.20	-55.78	peak
4	5720.000	49.03	1.17	50.20	110.80	-60.60	peak
5	5725.000	50.30	1.18	51.48	122.20	-70.72	peak
6	5828.800	106.58	1.46	108.04	131.20	-23.16	peak
7	5850.000	69.77	1.52	71.29	122.20	-50.91	peak
8	5855.000	64.97	1.53	66.50	110.80	-44.30	peak
9	5875.000	55.81	1.59	57.40	105.20	-47.80	peak
10	5925.000	49.46	1.72	51.18	68.20	-17.02	peak
11	6013.600	52.45	1.97	54.42	68.20	-13.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

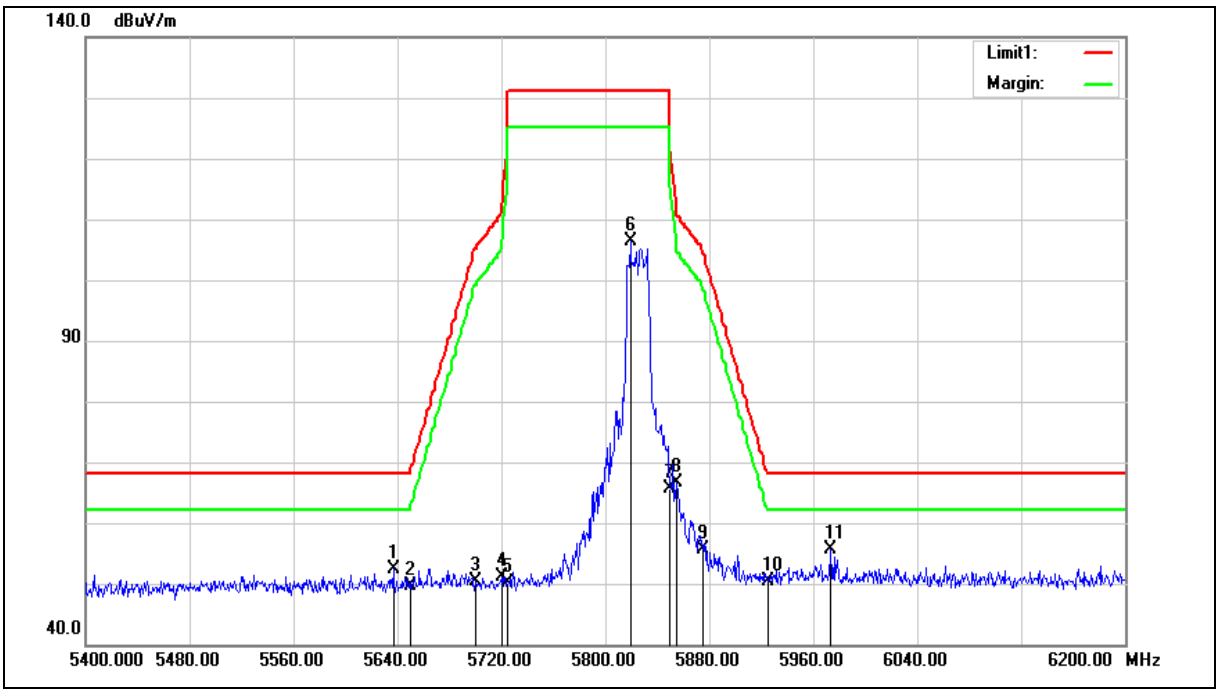

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5636.800	51.44	0.93	52.37	68.20	-15.83	peak
2	5650.000	48.61	0.97	49.58	68.20	-18.62	peak
3	5700.000	49.21	1.11	50.32	105.20	-54.88	peak
4	5720.000	50.04	1.17	51.21	110.80	-59.59	peak
5	5725.000	48.91	1.18	50.09	122.20	-72.11	peak
6	5819.200	104.85	1.43	106.28	131.20	-24.92	peak
7	5850.000	64.11	1.52	65.63	122.20	-56.57	peak
8	5855.000	65.00	1.53	66.53	110.80	-44.27	peak
9	5875.000	54.15	1.59	55.74	105.20	-49.46	peak
10	5925.000	48.59	1.72	50.31	68.20	-17.89	peak
11	5973.600	53.73	1.85	55.58	68.20	-12.62	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

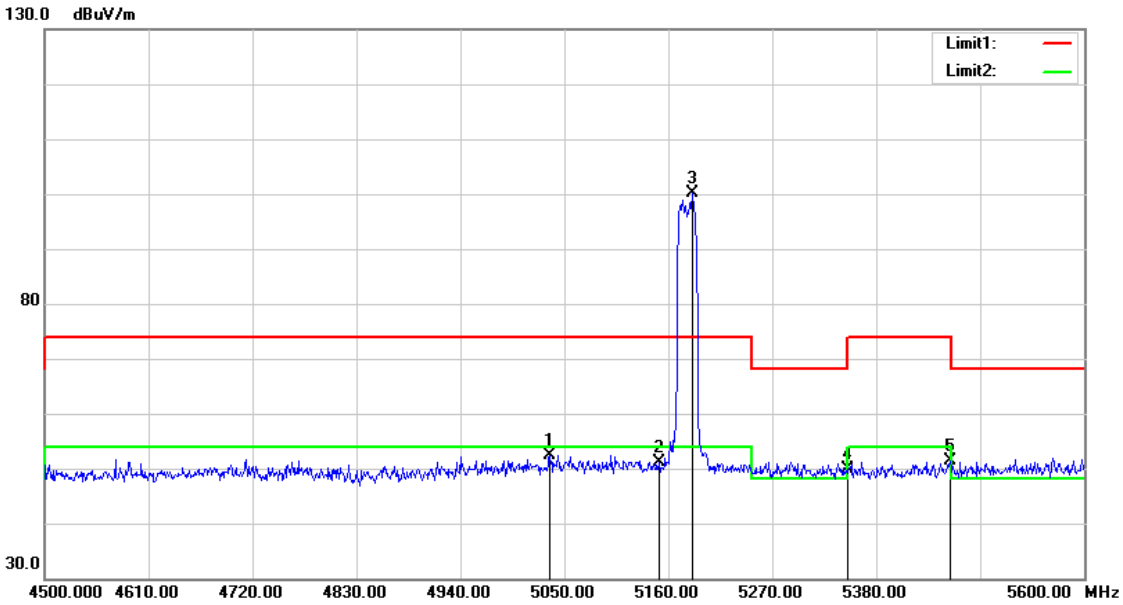


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5034.600	52.78	-0.29	52.49	74.00	-21.51	peak
2	5150.000	51.10	-0.08	51.02	74.00	-22.98	peak
3	5185.300	100.10	-0.01	100.09	74.00	26.09	peak
4	5350.000	49.56	0.30	49.86	74.00	-24.14	peak
5	5458.100	50.80	0.50	51.30	74.00	-22.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

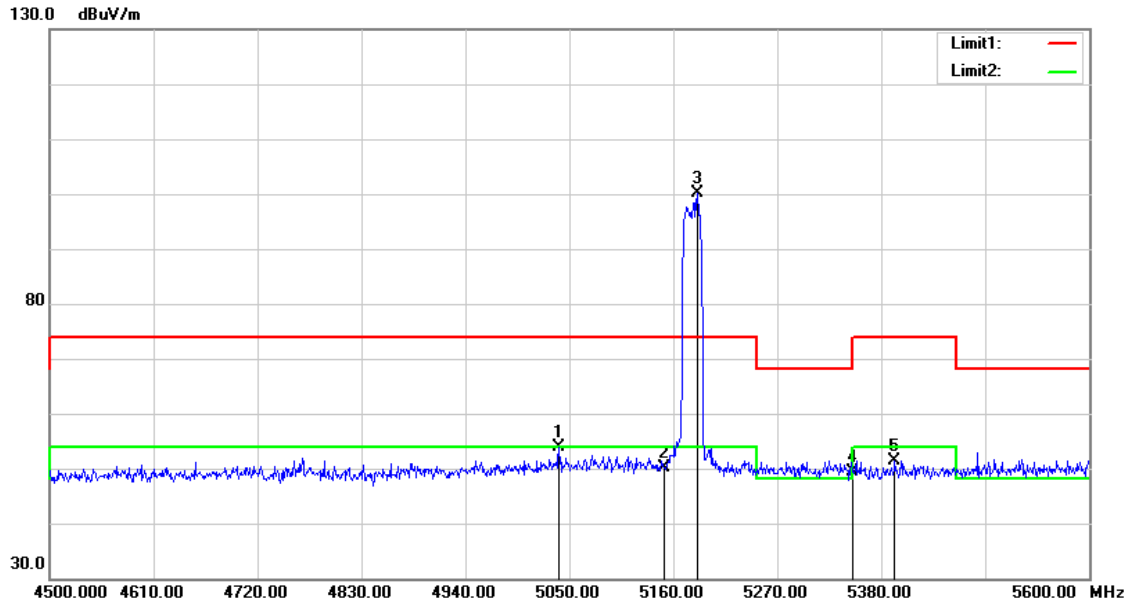


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5039.000	54.09	-0.29	53.80	74.00	-20.20	peak
2	5150.000	50.19	-0.08	50.11	74.00	-23.89	peak
3	5185.300	100.07	-0.01	100.06	74.00	26.06	peak
4	5350.000	49.02	0.30	49.32	74.00	-24.68	peak
5	5394.300	51.01	0.38	51.39	74.00	-22.61	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

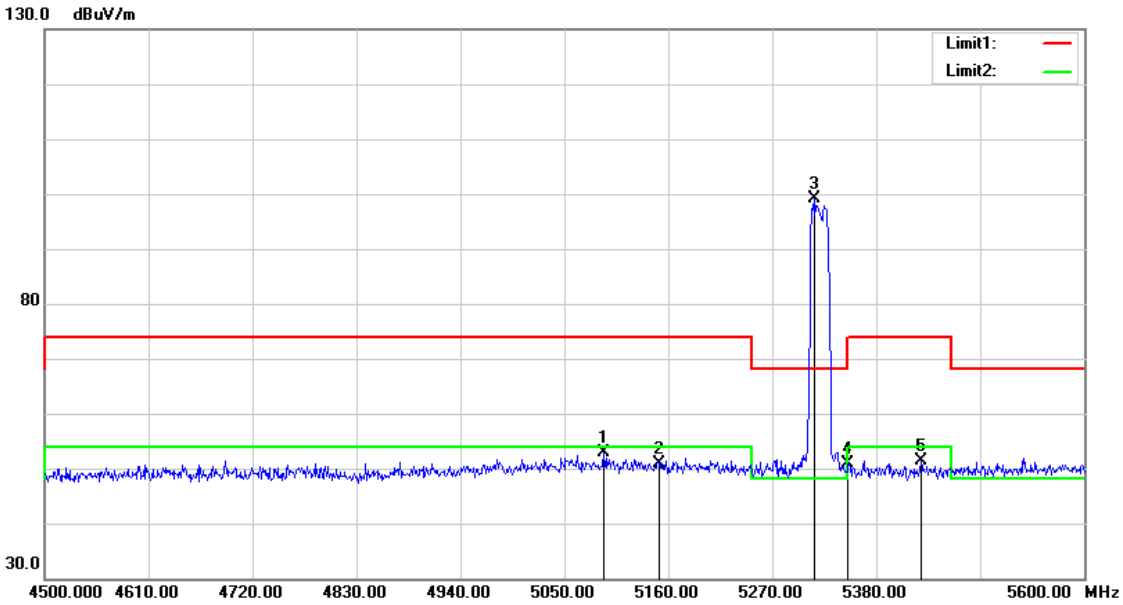


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5091.800	53.01	-0.19	52.82	74.00	-21.18	peak
2	5150.000	50.87	-0.08	50.79	74.00	-23.21	peak
3	5315.100	98.81	0.23	99.04	68.20	30.84	peak
4	5350.000	50.49	0.30	50.79	74.00	-23.21	peak
5	5427.300	51.06	0.44	51.50	74.00	-22.50	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

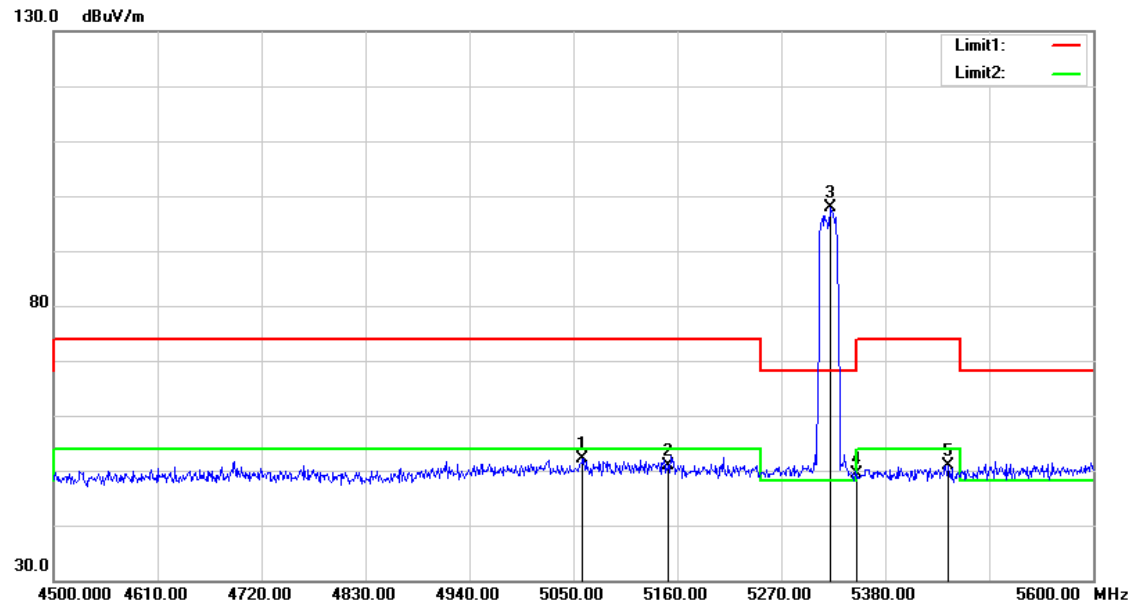


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5059.900	52.30	-0.25	52.05	74.00	-21.95	peak
2	5150.000	50.99	-0.08	50.91	74.00	-23.09	peak
3	5321.700	97.72	0.24	97.96	68.20	29.76	peak
4	5350.000	49.13	0.30	49.43	74.00	-24.57	peak
5	5446.000	50.46	0.48	50.94	74.00	-23.06	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

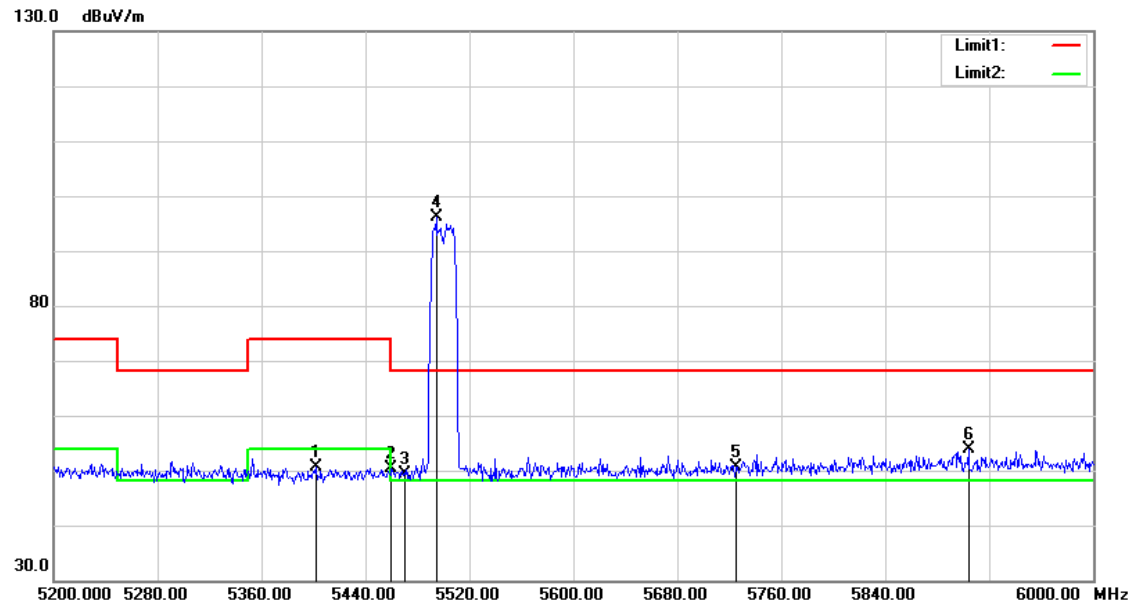


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5401.600	50.17	0.39	50.56	74.00	-23.44	peak
2	5460.000	49.83	0.51	50.34	74.00	-23.66	peak
3	5470.000	48.79	0.52	49.31	68.20	-18.89	peak
4	5494.400	95.46	0.57	96.03	68.20	27.83	peak
5	5725.000	49.37	1.18	50.55	68.20	-17.65	peak
6	5904.000	52.21	1.66	53.87	68.20	-14.33	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

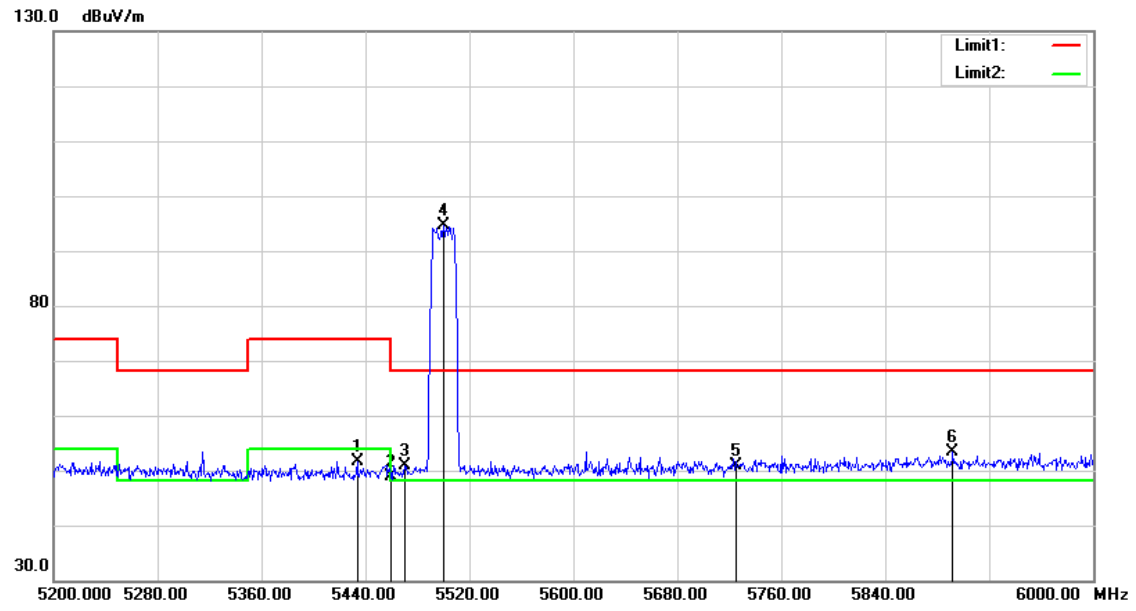


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5433.600	51.23	0.46	51.69	74.00	-22.31	peak
2	5460.000	48.37	0.51	48.88	74.00	-25.12	peak
3	5470.000	50.37	0.52	50.89	68.20	-17.31	peak
4	5500.000	94.08	0.58	94.66	68.20	26.46	peak
5	5725.000	49.72	1.18	50.90	68.20	-17.30	peak
6	5892.000	51.70	1.63	53.33	68.20	-14.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

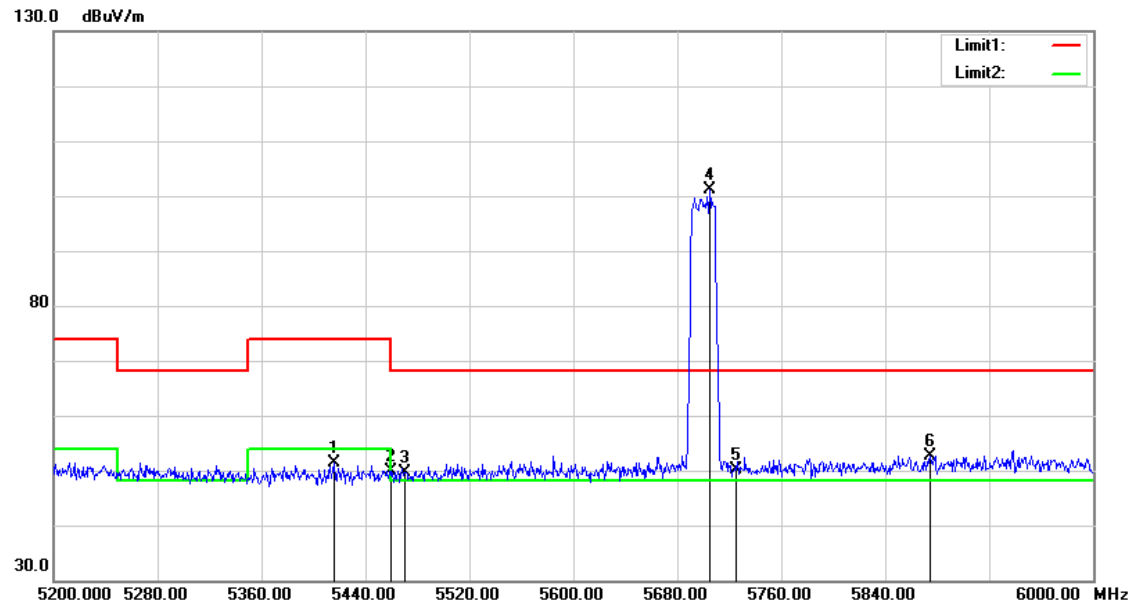


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5416.000	50.94	0.41	51.35	74.00	-22.65	peak
2	5460.000	49.27	0.51	49.78	74.00	-24.22	peak
3	5470.000	49.21	0.52	49.73	68.20	-18.47	peak
4	5704.800	99.89	1.13	101.02	68.20	32.82	peak
5	5725.000	48.98	1.18	50.16	68.20	-18.04	peak
6	5874.400	51.09	1.58	52.67	68.20	-15.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

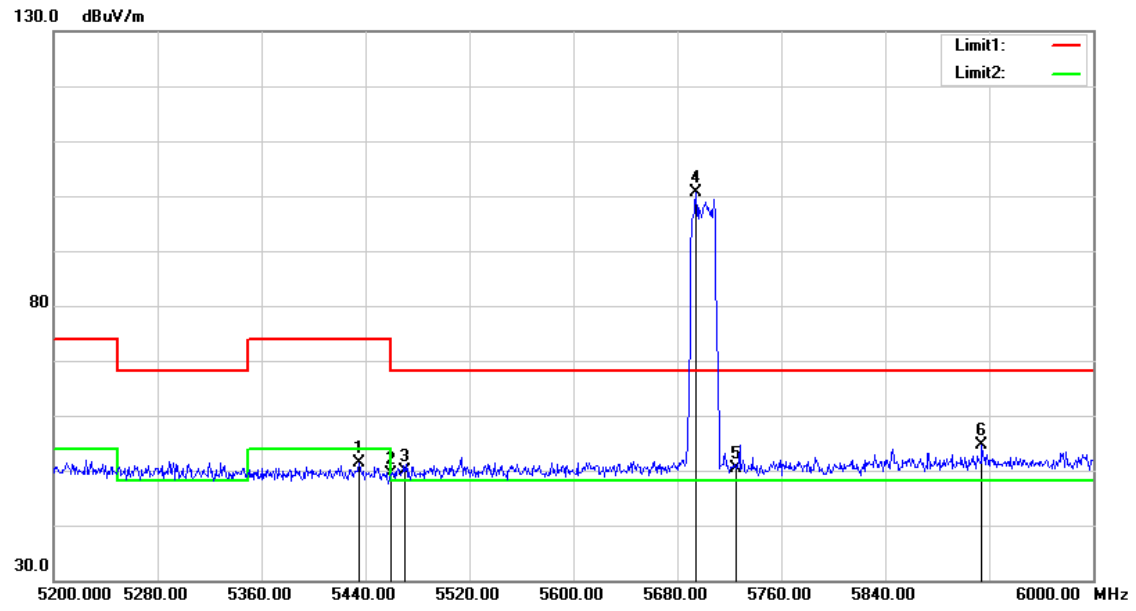


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5435.200	50.93	0.46	51.39	74.00	-22.61	peak
2	5460.000	48.81	0.51	49.32	74.00	-24.68	peak
3	5470.000	49.46	0.52	49.98	68.20	-18.22	peak
4	5694.400	99.47	1.10	100.57	68.20	32.37	peak
5	5725.000	49.27	1.18	50.45	68.20	-17.75	peak
6	5914.400	53.03	1.69	54.72	68.20	-13.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

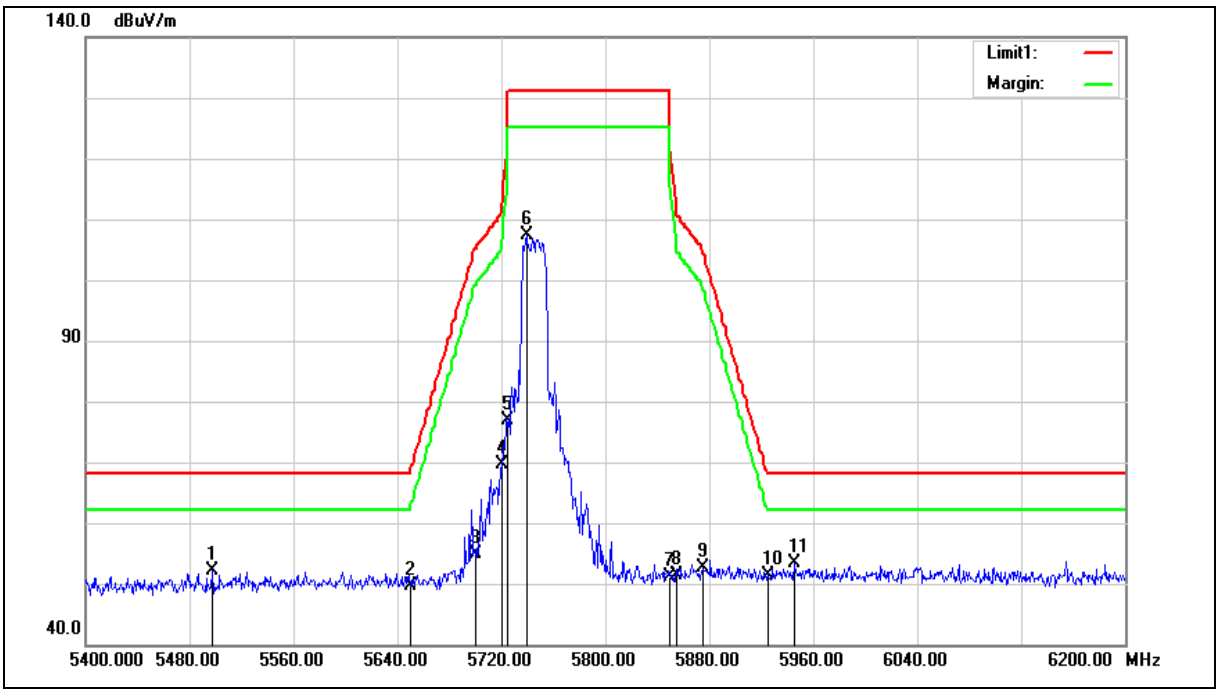

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5497.600	51.62	0.57	52.19	68.20	-16.01	peak
2	5650.000	48.61	0.97	49.58	68.20	-18.62	peak
3	5700.000	53.75	1.11	54.86	105.20	-50.34	peak
4	5720.000	68.35	1.17	69.52	110.80	-41.28	peak
5	5725.000	75.80	1.18	76.98	122.20	-45.22	peak
6	5739.200	106.05	1.22	107.27	131.20	-23.93	peak
7	5850.000	49.62	1.52	51.14	122.20	-71.06	peak
8	5855.000	49.85	1.53	51.38	110.80	-59.42	peak
9	5875.000	51.15	1.59	52.74	105.20	-52.46	peak
10	5925.000	49.69	1.72	51.41	68.20	-16.79	peak
11	5945.600	51.62	1.77	53.39	68.20	-14.81	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

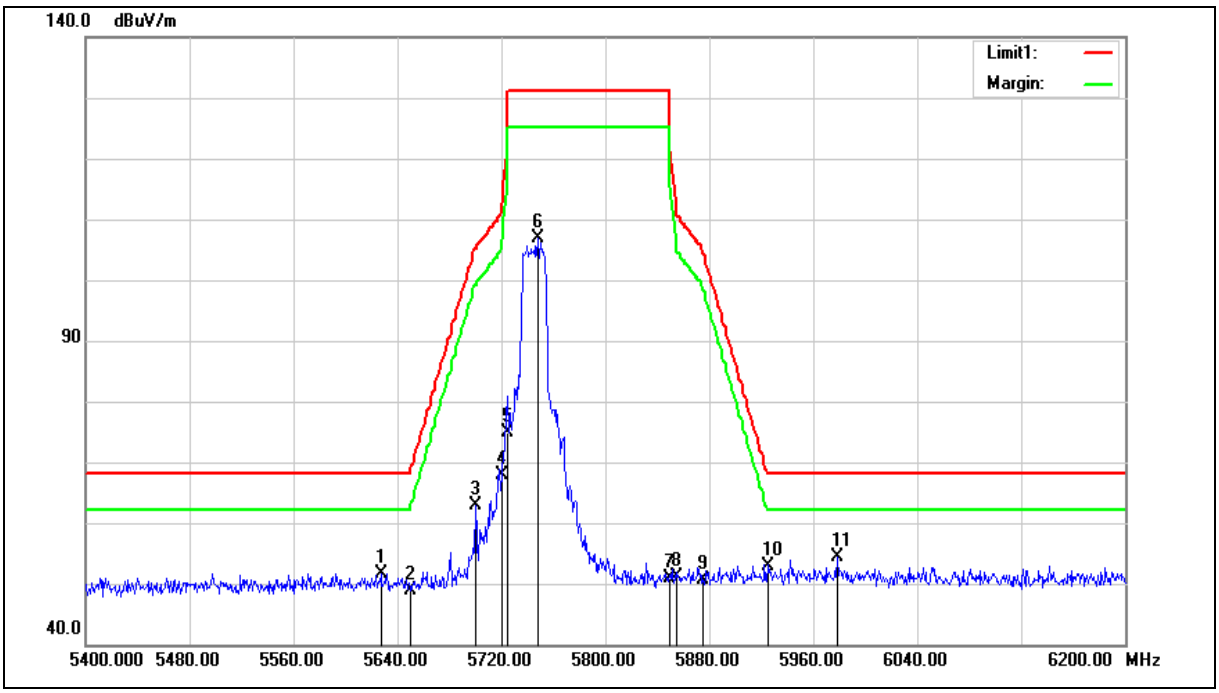

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5627.200	50.80	0.92	51.72	68.20	-16.48	peak
2	5650.000	47.96	0.97	48.93	68.20	-19.27	peak
3	5700.000	61.70	1.11	62.81	105.20	-42.39	peak
4	5720.000	66.74	1.17	67.91	110.80	-42.89	peak
5	5725.000	73.71	1.18	74.89	122.20	-47.31	peak
6	5748.000	105.63	1.25	106.88	131.20	-24.32	peak
7	5850.000	49.30	1.52	50.82	122.20	-71.38	peak
8	5855.000	49.49	1.53	51.02	110.80	-59.78	peak
9	5875.000	49.06	1.59	50.65	105.20	-54.55	peak
10	5925.000	51.28	1.72	53.00	68.20	-15.20	peak
11	5978.400	52.51	1.85	54.36	68.20	-13.84	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

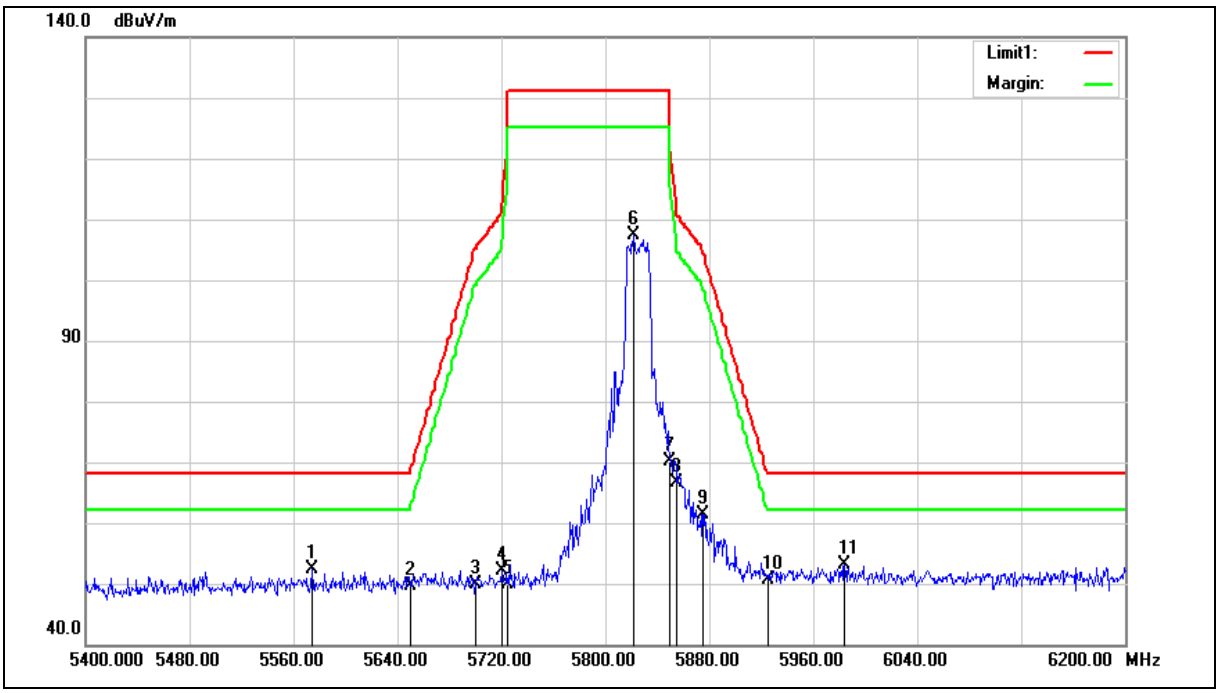

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5574.400	51.61	0.78	52.39	68.20	-15.81	peak
2	5650.000	48.72	0.97	49.69	68.20	-18.51	peak
3	5700.000	48.72	1.11	49.83	105.20	-55.37	peak
4	5720.000	50.96	1.17	52.13	110.80	-58.67	peak
5	5725.000	48.65	1.18	49.83	122.20	-72.37	peak
6	5821.600	105.86	1.44	107.30	131.20	-23.90	peak
7	5850.000	68.56	1.52	70.08	122.20	-52.12	peak
8	5855.000	65.02	1.53	66.55	110.80	-44.25	peak
9	5875.000	59.89	1.59	61.48	105.20	-43.72	peak
10	5925.000	48.86	1.72	50.58	68.20	-17.62	peak
11	5984.000	51.20	1.88	53.08	68.20	-15.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

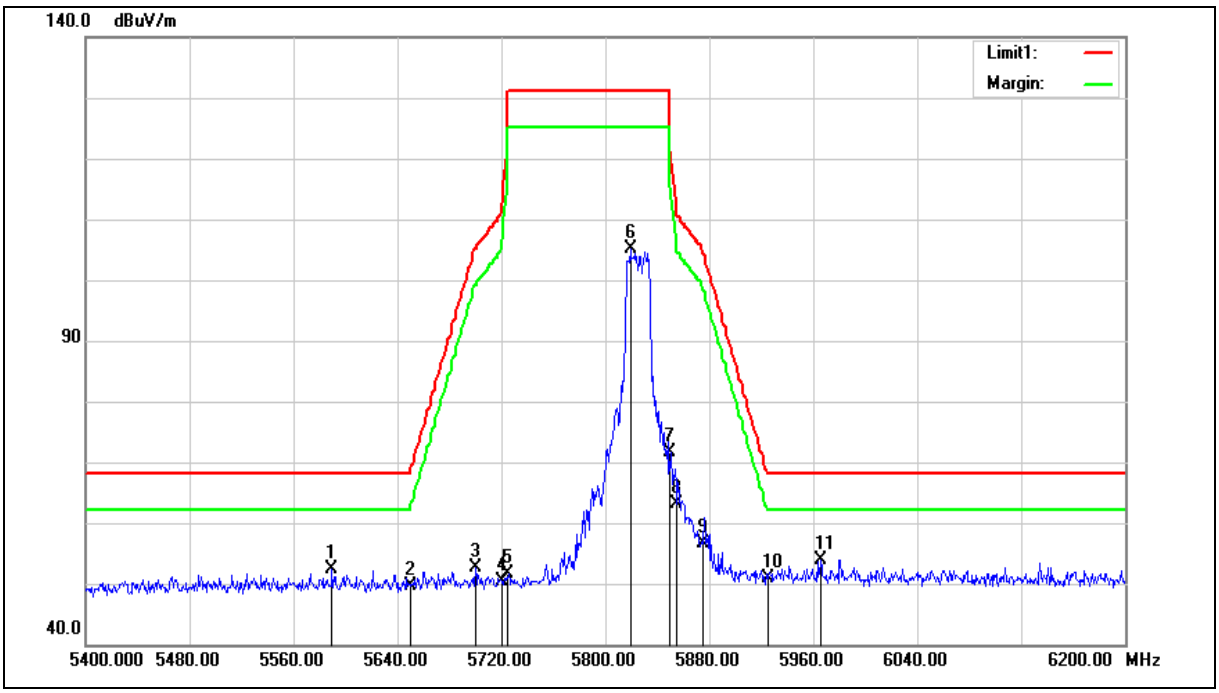

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5589.600	51.44	0.82	52.26	68.20	-15.94	peak
2	5650.000	48.75	0.97	49.72	68.20	-18.48	peak
3	5700.000	51.59	1.11	52.70	105.20	-52.50	peak
4	5720.000	49.09	1.17	50.26	110.80	-60.54	peak
5	5725.000	50.46	1.18	51.64	122.20	-70.56	peak
6	5819.200	103.58	1.43	105.01	131.20	-26.19	peak
7	5850.000	70.14	1.52	71.66	122.20	-50.54	peak
8	5855.000	61.66	1.53	63.19	110.80	-47.61	peak
9	5875.000	55.08	1.59	56.67	105.20	-48.53	peak
10	5925.000	49.21	1.72	50.93	68.20	-17.27	peak
11	5965.600	52.09	1.82	53.91	68.20	-14.29	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

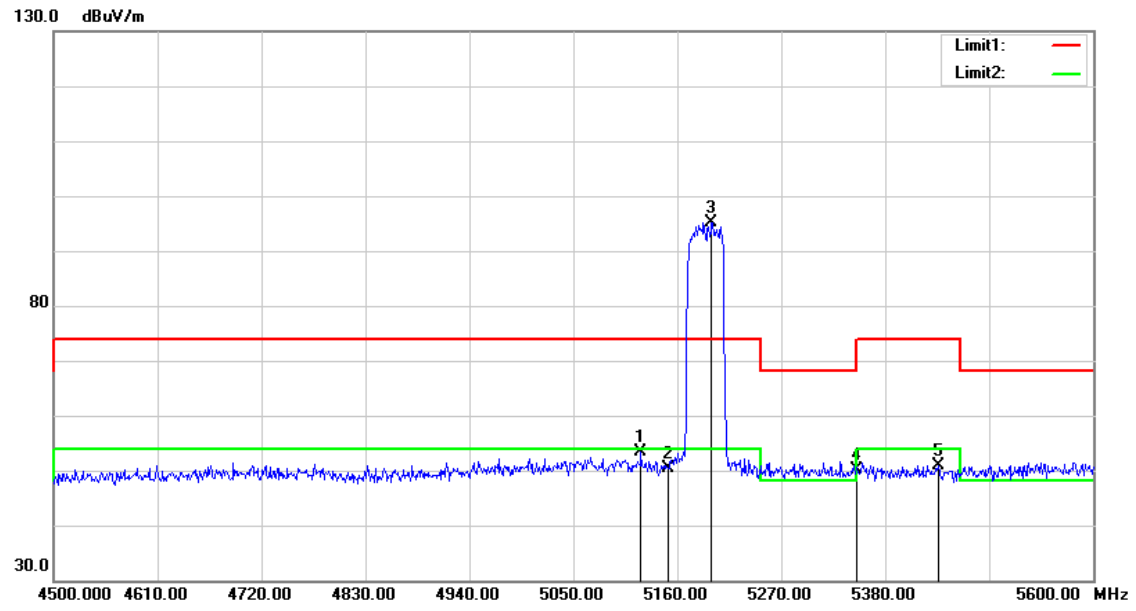


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5121.500	53.60	-0.13	53.47	74.00	-20.53	peak
2	5150.000	50.50	-0.08	50.42	74.00	-23.58	peak
3	5196.300	95.23	0.01	95.24	74.00	21.24	peak
4	5350.000	49.77	0.30	50.07	74.00	-23.93	peak
5	5436.100	50.49	0.46	50.95	74.00	-23.05	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

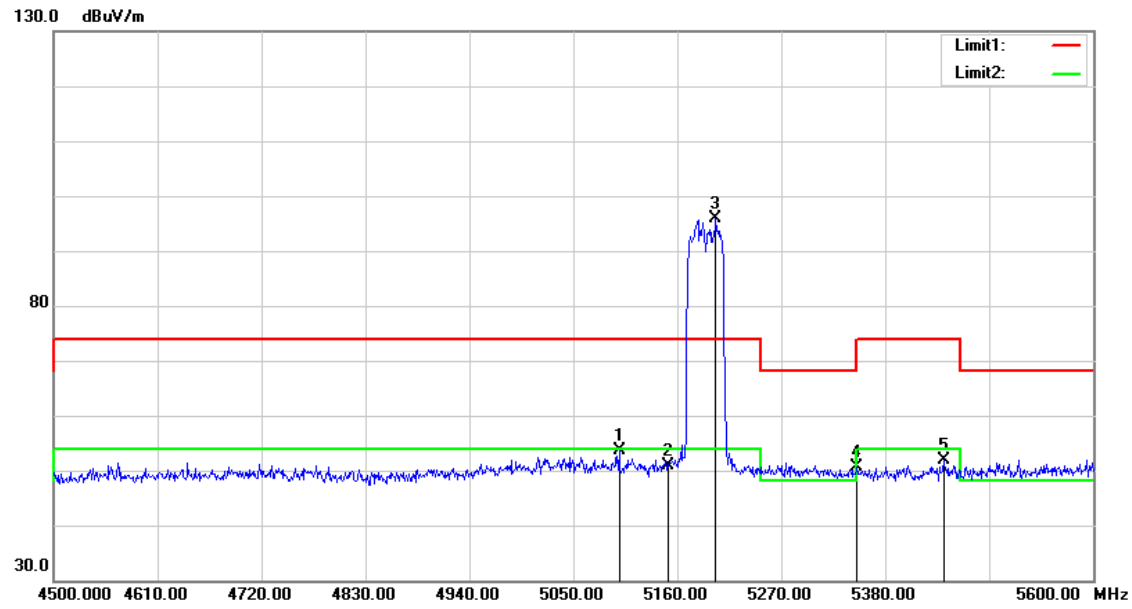


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5098.400	53.77	-0.18	53.59	74.00	-20.41	peak
2	5150.000	50.86	-0.08	50.78	74.00	-23.22	peak
3	5200.700	95.86	0.02	95.88	74.00	21.88	peak
4	5350.000	50.24	0.30	50.54	74.00	-23.46	peak
5	5441.600	51.31	0.46	51.77	74.00	-22.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

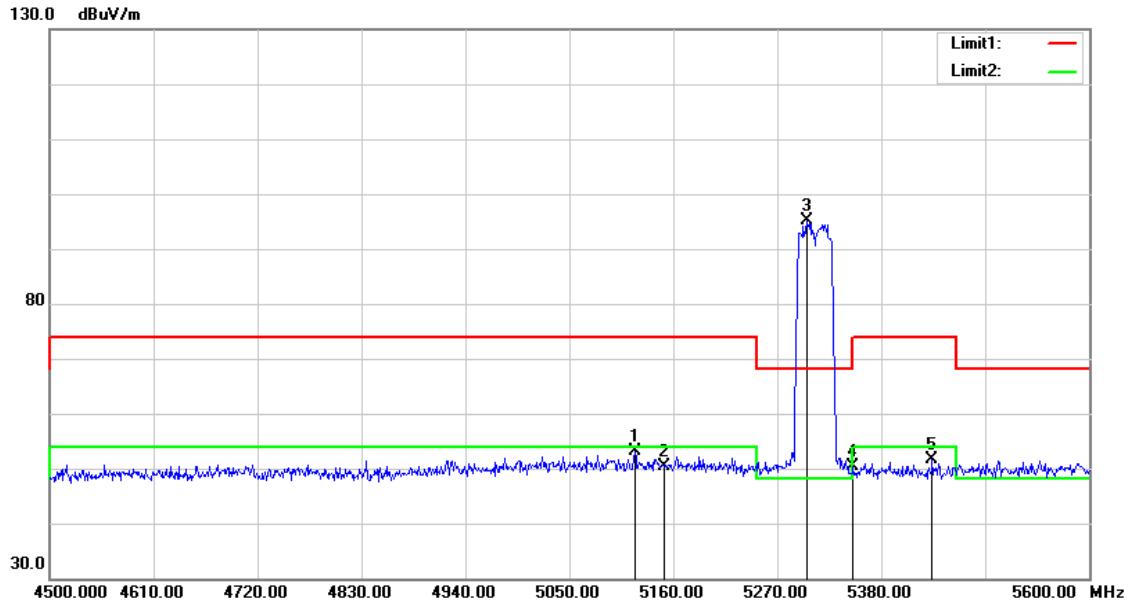


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5119.300	53.33	-0.13	53.20	74.00	-20.80	peak
2	5150.000	50.40	-0.08	50.32	74.00	-23.68	peak
3	5300.800	94.99	0.20	95.19	68.20	26.99	peak
4	5350.000	50.18	0.30	50.48	74.00	-23.52	peak
5	5433.900	51.20	0.46	51.66	74.00	-22.34	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

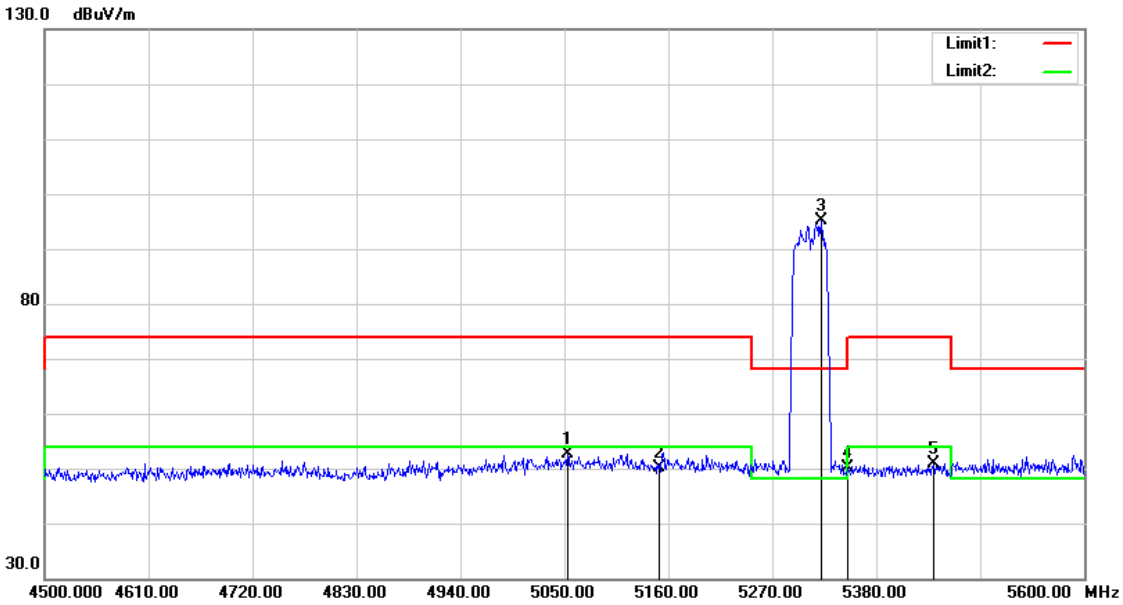


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5053.300	52.92	-0.26	52.66	74.00	-21.34	peak
2	5150.000	50.31	-0.08	50.23	74.00	-23.77	peak
3	5321.700	94.87	0.24	95.11	68.20	26.91	peak
4	5350.000	49.82	0.30	50.12	74.00	-23.88	peak
5	5440.500	50.36	0.46	50.82	74.00	-23.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

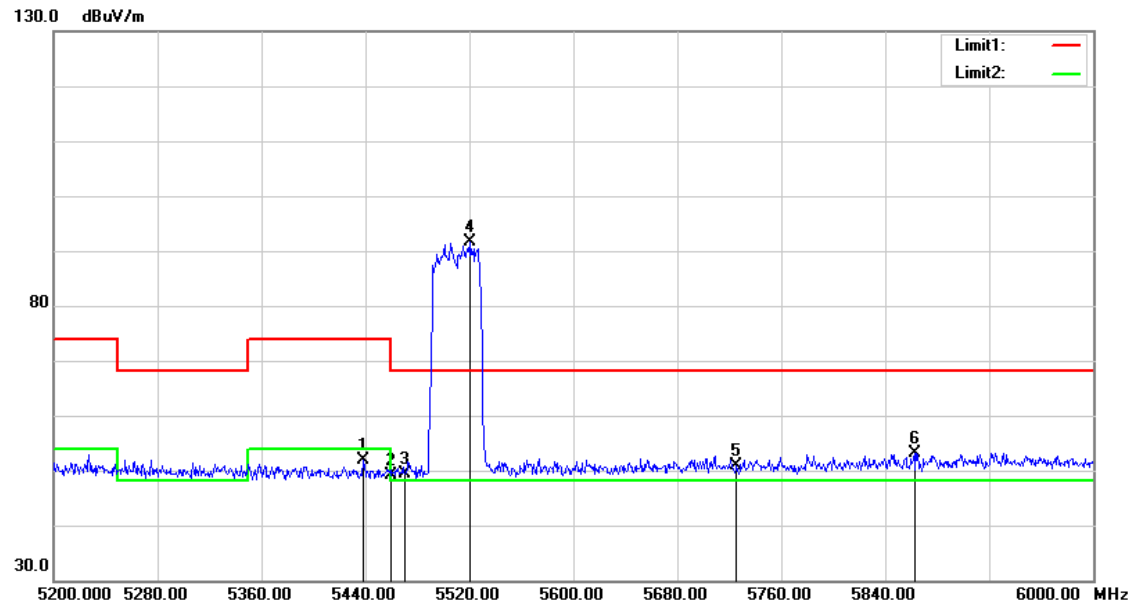


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5438.400	51.41	0.46	51.87	74.00	-22.13	peak
2	5460.000	48.57	0.51	49.08	74.00	-24.92	peak
3	5470.000	48.91	0.52	49.43	68.20	-18.77	peak
4	5520.800	91.12	0.63	91.75	68.20	23.55	peak
5	5725.000	49.71	1.18	50.89	68.20	-17.31	peak
6	5862.400	51.68	1.55	53.23	68.20	-14.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

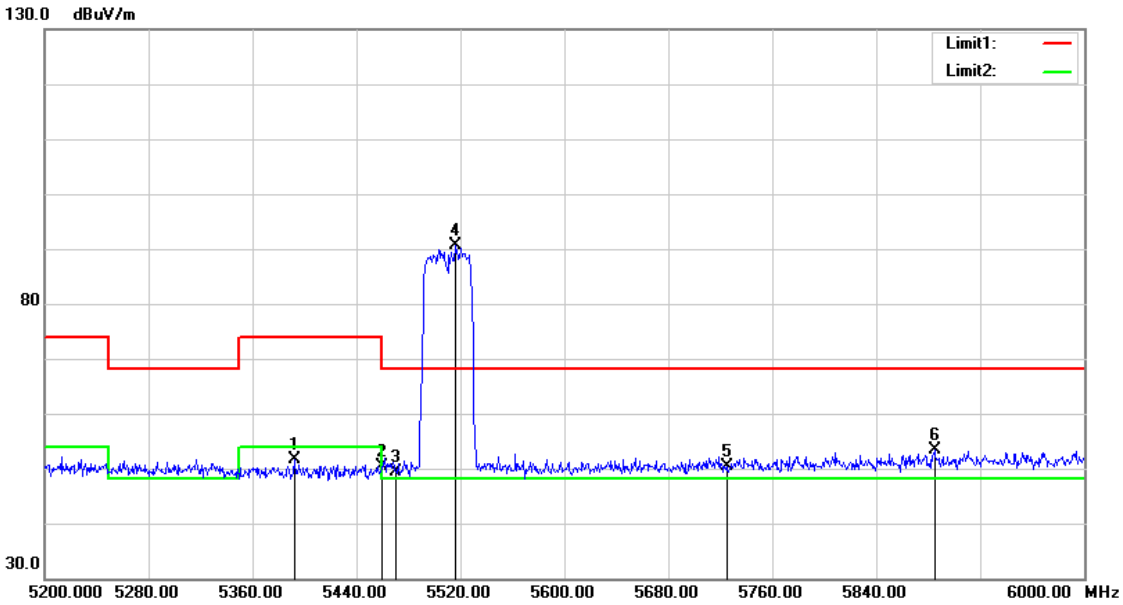


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5392.000	51.27	0.37	51.64	74.00	-22.36	peak
2	5460.000	49.94	0.51	50.45	74.00	-23.55	peak
3	5470.000	48.75	0.52	49.27	68.20	-18.93	peak
4	5516.000	90.06	0.62	90.68	68.20	22.48	peak
5	5725.000	49.24	1.18	50.42	68.20	-17.78	peak
6	5884.800	51.81	1.61	53.42	68.20	-14.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

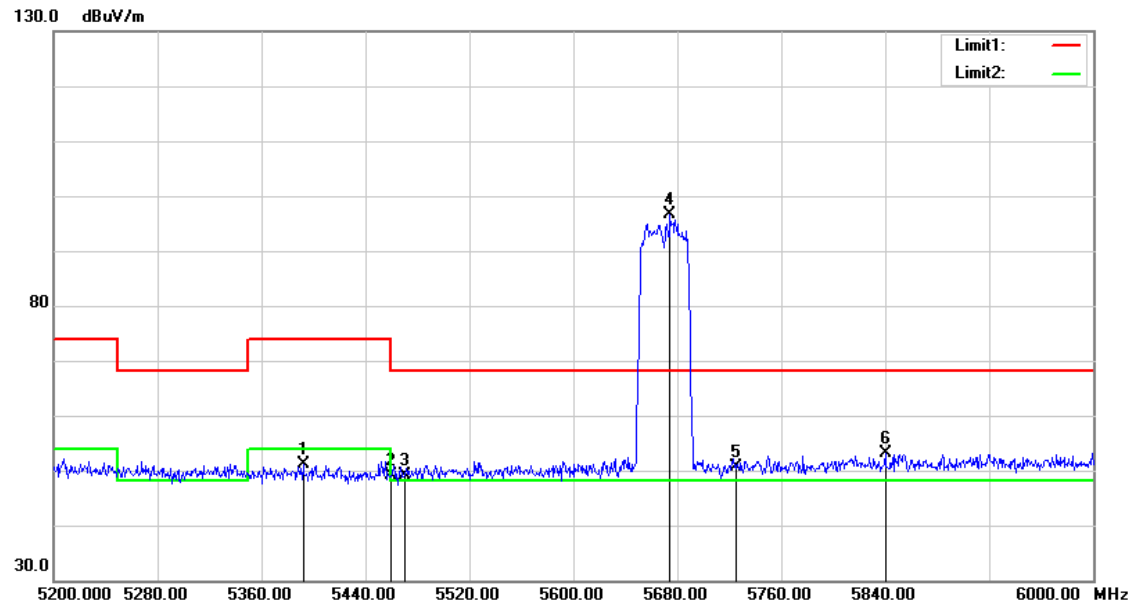


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5392.000	50.75	0.37	51.12	74.00	-22.88	peak
2	5460.000	48.69	0.51	49.20	74.00	-24.80	peak
3	5470.000	48.54	0.52	49.06	68.20	-19.14	peak
4	5674.400	95.54	1.04	96.58	68.20	28.38	peak
5	5725.000	49.56	1.18	50.74	68.20	-17.46	peak
6	5840.000	51.54	1.49	53.03	68.20	-15.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

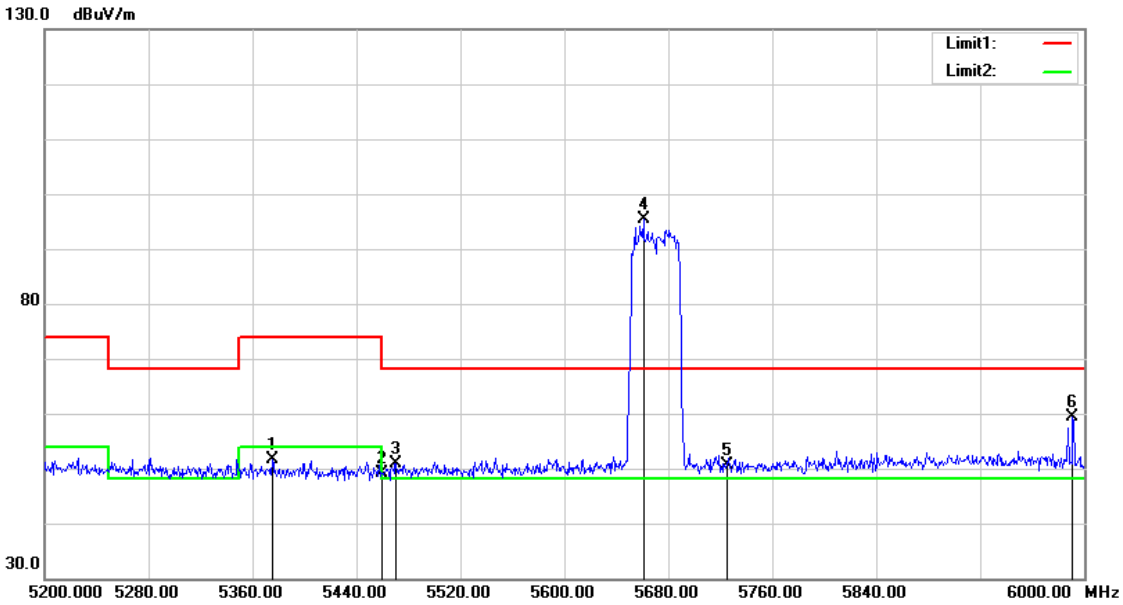


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5375.200	51.19	0.34	51.53	74.00	-22.47	peak
2	5460.000	48.62	0.51	49.13	74.00	-24.87	peak
3	5470.000	50.28	0.52	50.80	68.20	-17.40	peak
4	5660.800	94.39	1.00	95.39	68.20	27.19	peak
5	5725.000	49.40	1.18	50.58	68.20	-17.62	peak
6	5991.200	57.38	1.89	59.27	68.20	-8.93	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

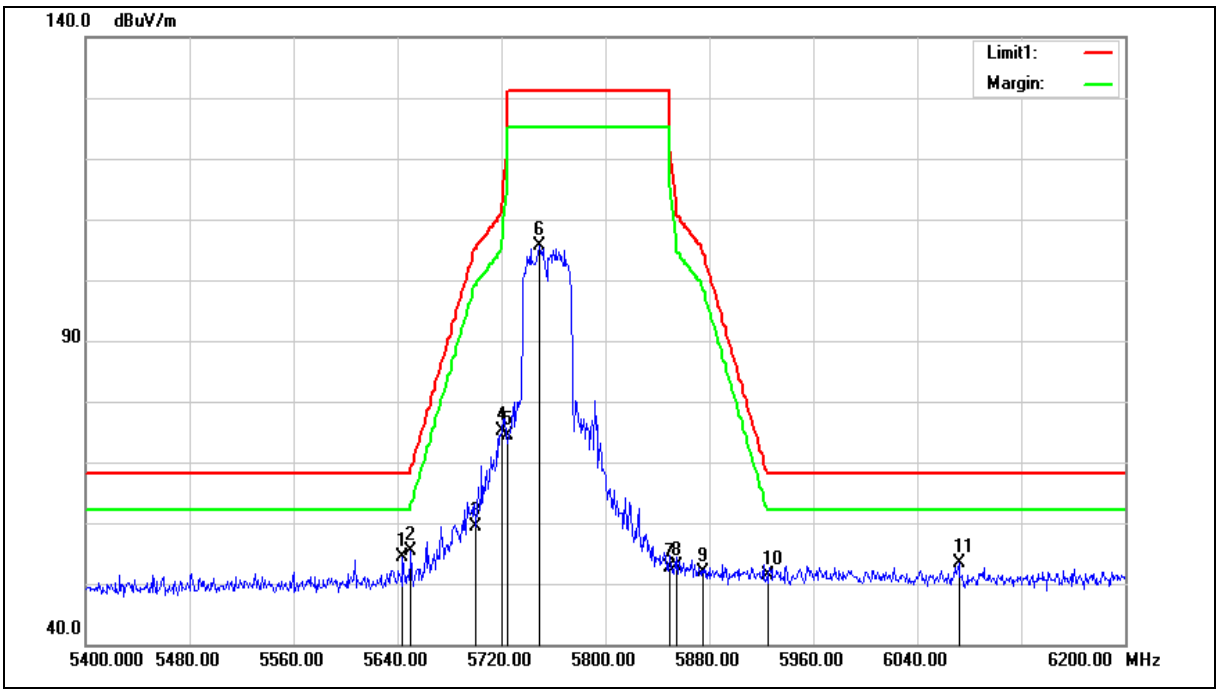

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5644.000	53.54	0.96	54.50	68.20	-13.70	peak
2	5650.000	54.42	0.97	55.39	68.20	-12.81	peak
3	5700.000	58.36	1.11	59.47	105.20	-45.73	peak
4	5720.000	73.85	1.17	75.02	110.80	-35.78	peak
5	5725.000	73.32	1.18	74.50	122.20	-47.70	peak
6	5749.600	104.44	1.25	105.69	131.20	-25.51	peak
7	5850.000	51.20	1.52	52.72	122.20	-69.48	peak
8	5855.000	51.28	1.53	52.81	110.80	-57.99	peak
9	5875.000	50.22	1.59	51.81	105.20	-53.39	peak
10	5925.000	49.65	1.72	51.37	68.20	-16.83	peak
11	6072.000	51.09	2.20	53.29	68.20	-14.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

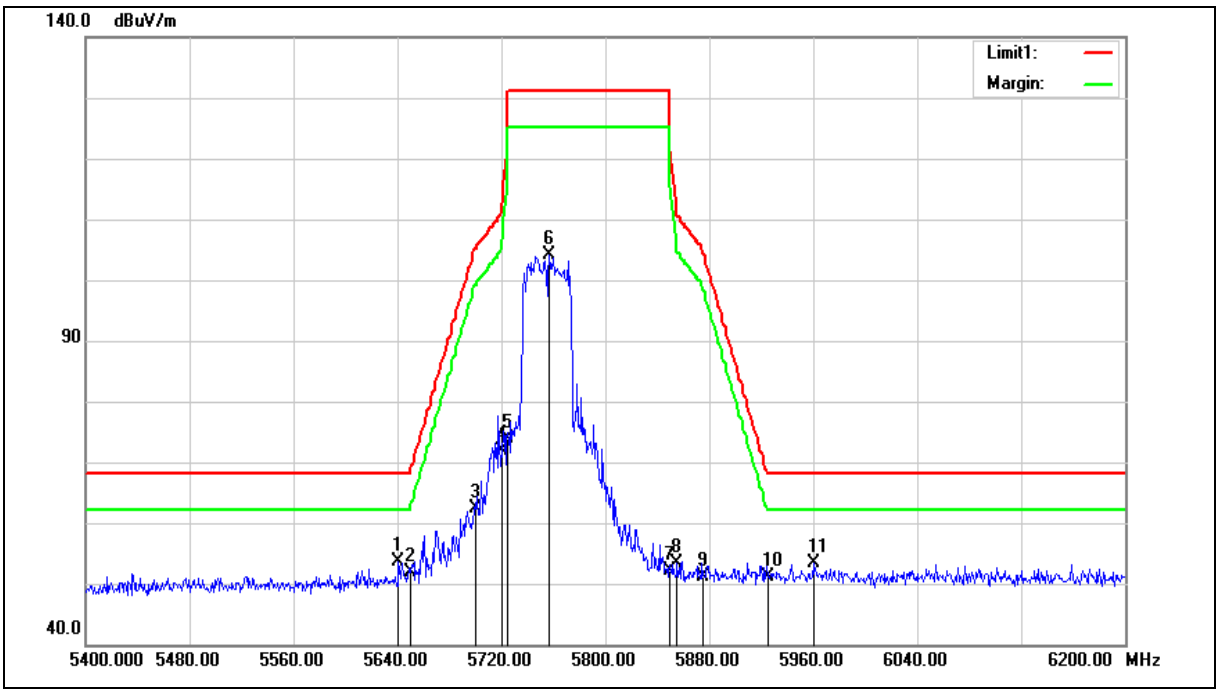

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5640.800	52.55	0.96	53.51	68.20	-14.69	peak
2	5650.000	50.83	0.97	51.80	68.20	-16.40	peak
3	5700.000	61.31	1.11	62.42	105.20	-42.78	peak
4	5720.000	70.70	1.17	71.87	110.80	-38.93	peak
5	5725.000	72.77	1.18	73.95	122.20	-48.25	peak
6	5756.800	102.92	1.27	104.19	131.20	-27.01	peak
7	5850.000	50.61	1.52	52.13	122.20	-70.07	peak
8	5855.000	51.96	1.53	53.49	110.80	-57.31	peak
9	5875.000	49.66	1.59	51.25	105.20	-53.95	peak
10	5925.000	49.32	1.72	51.04	68.20	-17.16	peak
11	5960.000	51.53	1.81	53.34	68.20	-14.86	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

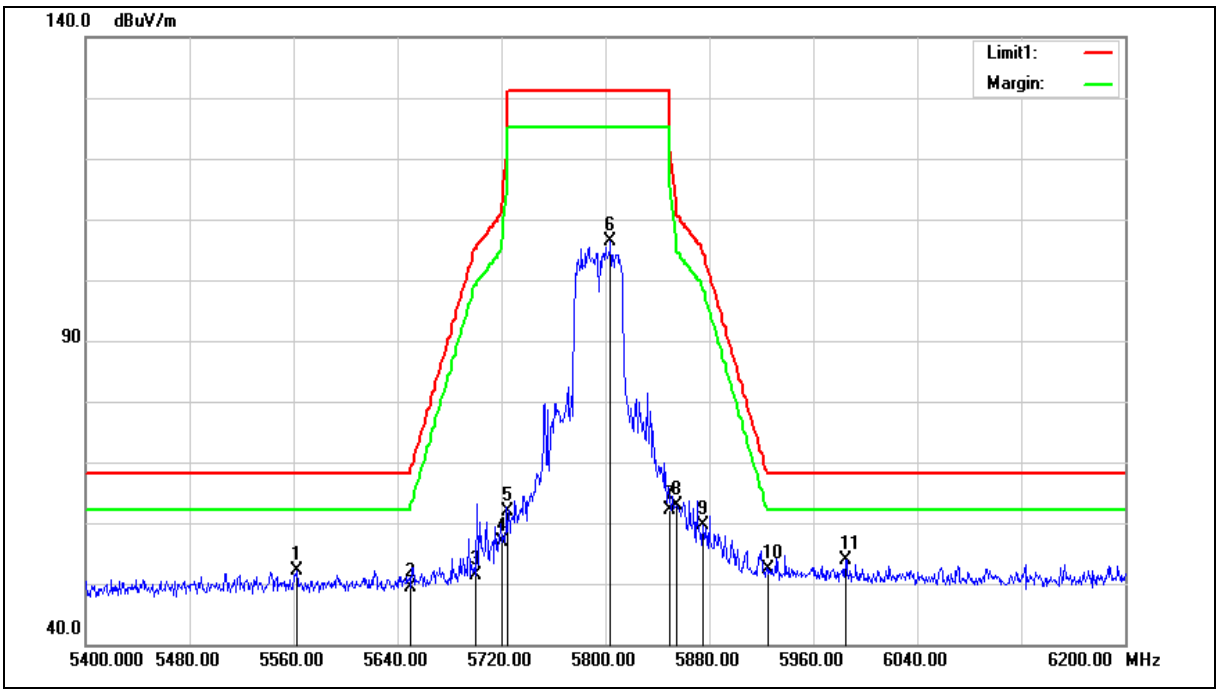

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5562.400	51.40	0.74	52.14	68.20	-16.06	peak
2	5650.000	48.37	0.97	49.34	68.20	-18.86	peak
3	5700.000	50.27	1.11	51.38	105.20	-53.82	peak
4	5720.000	55.81	1.17	56.98	110.80	-53.82	peak
5	5725.000	60.82	1.18	62.00	122.20	-60.20	peak
6	5804.000	104.89	1.39	106.28	131.20	-24.92	peak
7	5850.000	60.70	1.52	62.22	122.20	-59.98	peak
8	5855.000	61.32	1.53	62.85	110.80	-47.95	peak
9	5875.000	57.96	1.59	59.55	105.20	-45.65	peak
10	5925.000	50.64	1.72	52.36	68.20	-15.84	peak
11	5984.800	51.96	1.88	53.84	68.20	-14.36	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

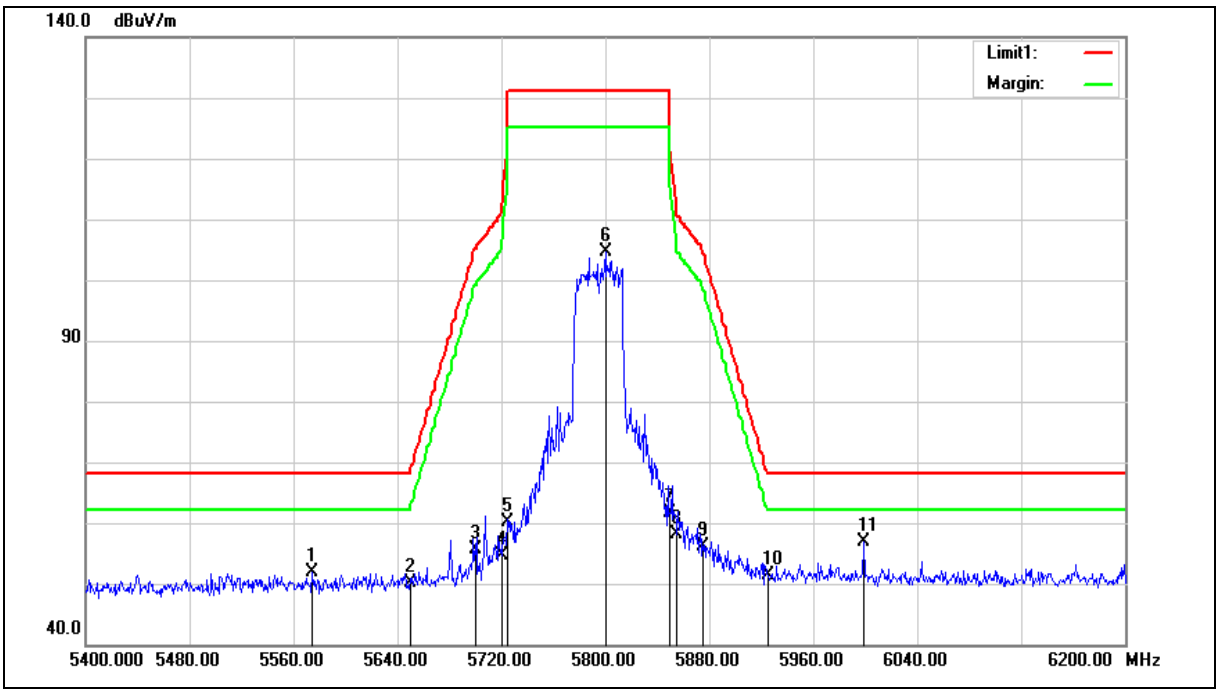

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5574.400	51.19	0.78	51.97	68.20	-16.23	peak
2	5650.000	49.21	0.97	50.18	68.20	-18.02	peak
3	5700.000	54.40	1.11	55.51	105.20	-49.69	peak
4	5720.000	53.49	1.17	54.66	110.80	-56.14	peak
5	5725.000	58.94	1.18	60.12	122.20	-62.08	peak
6	5800.000	103.36	1.38	104.74	131.20	-26.46	peak
7	5850.000	60.14	1.52	61.66	122.20	-60.54	peak
8	5855.000	56.65	1.53	58.18	110.80	-52.62	peak
9	5875.000	54.56	1.59	56.15	105.20	-49.05	peak
10	5925.000	49.70	1.72	51.42	68.20	-16.78	peak
11	5999.200	54.94	1.92	56.86	68.20	-11.34	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

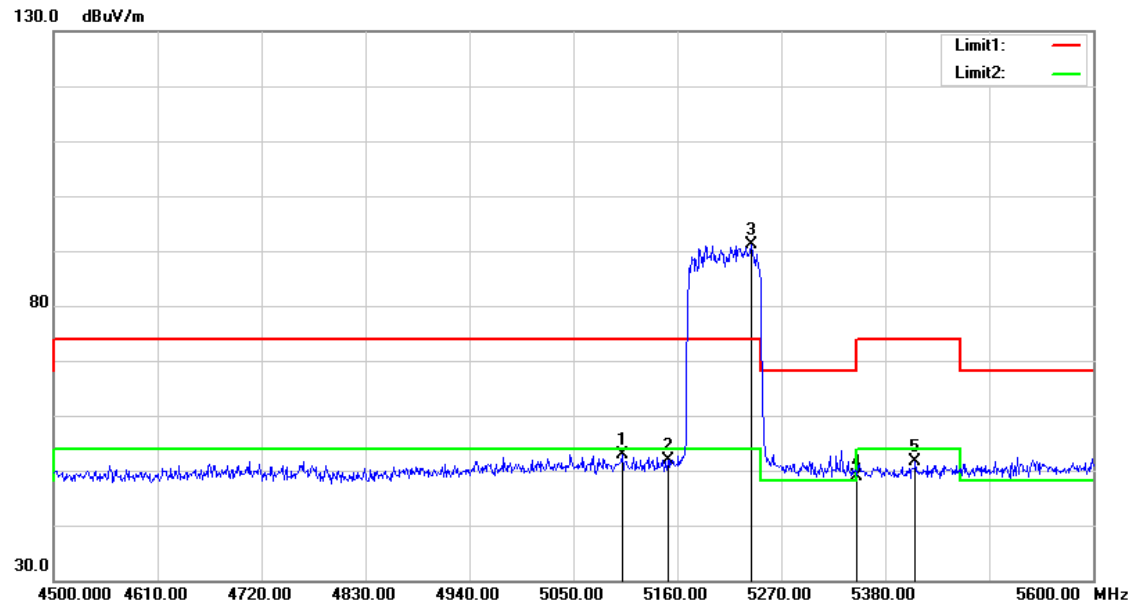


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5101.700	53.14	-0.18	52.96	74.00	-21.04	peak
2	5150.000	51.88	-0.08	51.80	74.00	-22.20	peak
3	5238.100	90.96	0.08	91.04	74.00	17.04	peak
4	5350.000	48.70	0.30	49.00	74.00	-25.00	peak
5	5411.900	51.17	0.41	51.58	74.00	-22.42	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

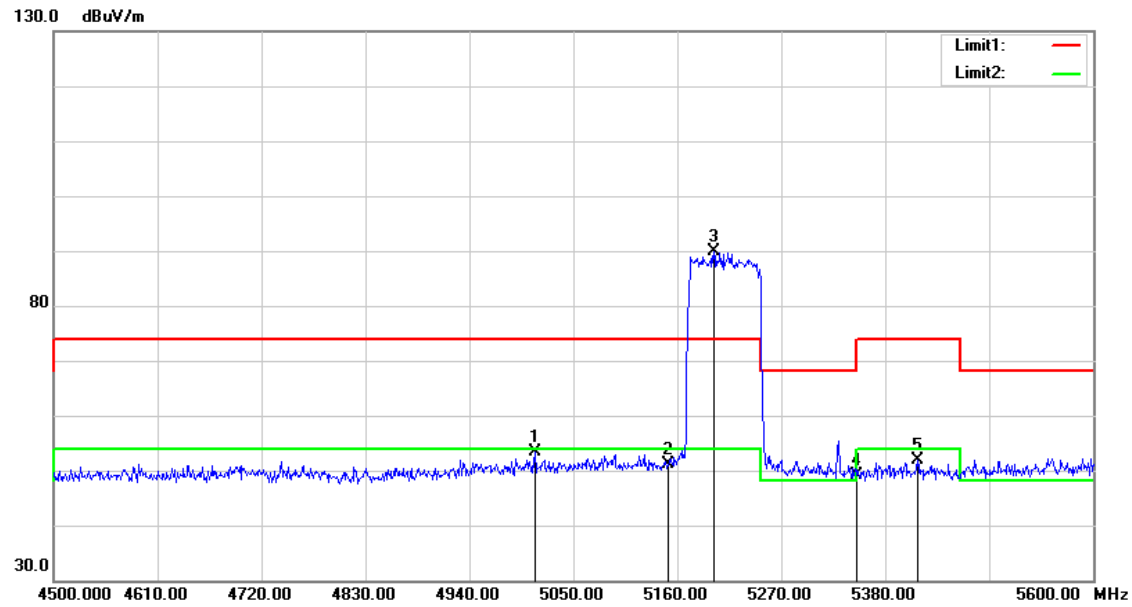


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5009.300	53.71	-0.34	53.37	74.00	-20.63	peak
2	5150.000	51.19	-0.08	51.11	74.00	-22.89	peak
3	5198.500	89.84	0.01	89.85	74.00	15.85	peak
4	5350.000	48.84	0.30	49.14	74.00	-24.86	peak
5	5414.100	51.52	0.41	51.93	74.00	-22.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

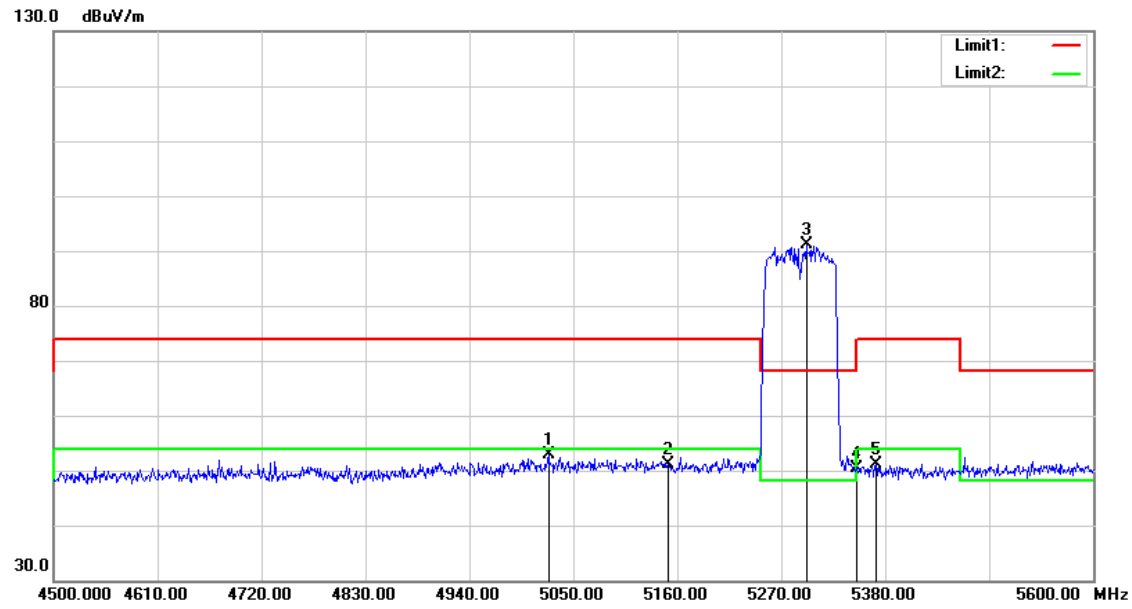


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5023.600	53.13	-0.31	52.82	74.00	-21.18	peak
2	5150.000	51.31	-0.08	51.23	74.00	-22.77	peak
3	5296.400	90.93	0.20	91.13	68.20	22.93	peak
4	5350.000	49.96	0.30	50.26	74.00	-23.74	peak
5	5370.100	50.77	0.34	51.11	74.00	-22.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

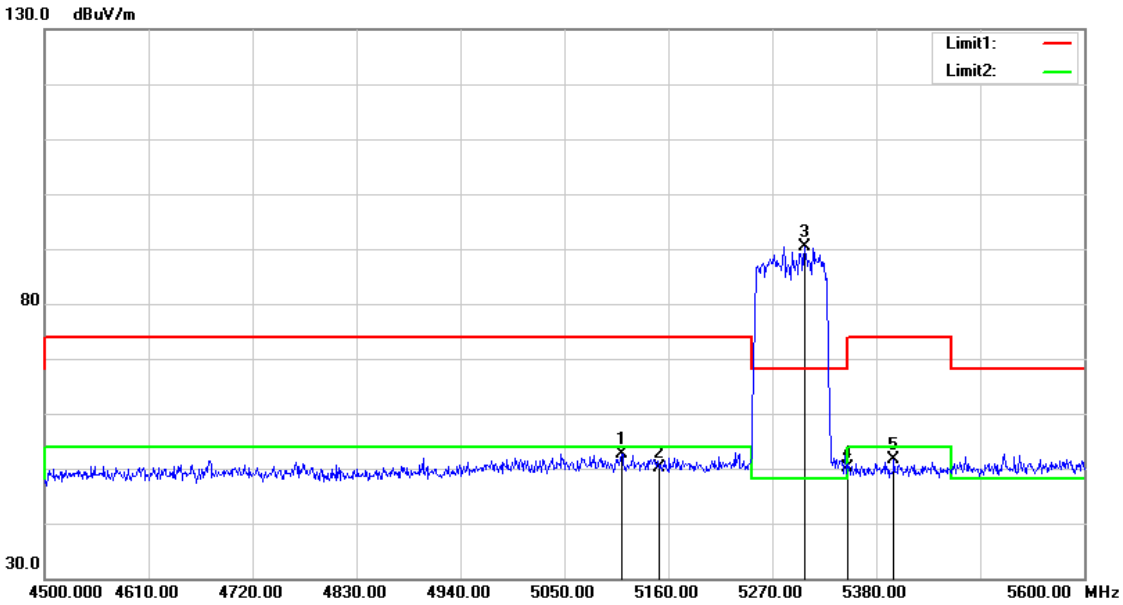


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5110.500	52.88	-0.15	52.73	74.00	-21.27	peak
2	5150.000	50.25	-0.08	50.17	74.00	-23.83	peak
3	5304.100	90.13	0.20	90.33	68.20	22.13	peak
4	5350.000	49.78	0.30	50.08	74.00	-23.92	peak
5	5398.700	51.30	0.39	51.69	74.00	-22.31	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

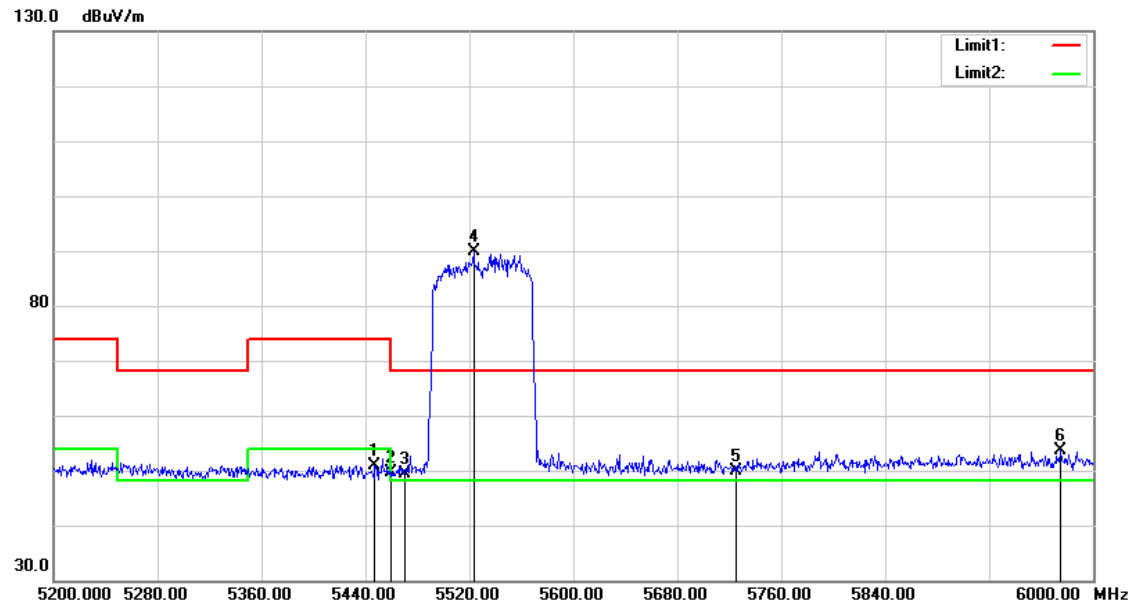


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5447.200	50.49	0.48	50.97	74.00	-23.03	peak
2	5460.000	49.01	0.51	49.52	74.00	-24.48	peak
3	5470.000	48.97	0.52	49.49	68.20	-18.71	peak
4	5523.200	89.14	0.64	89.78	68.20	21.58	peak
5	5725.000	48.71	1.18	49.89	68.20	-18.31	peak
6	5975.200	51.76	1.85	53.61	68.20	-14.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

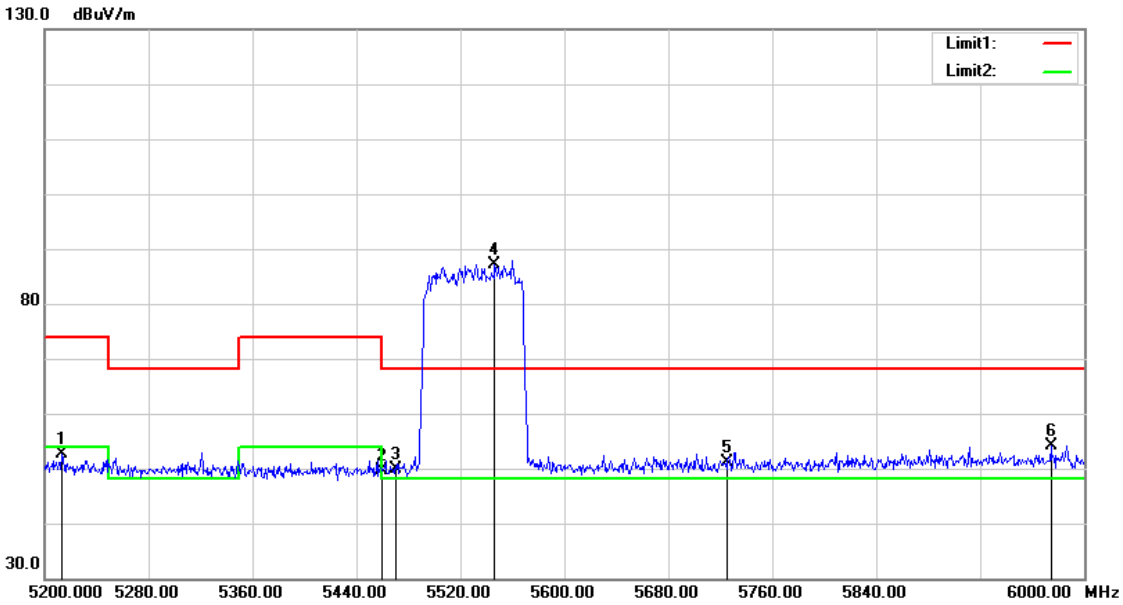


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5213.600	52.59	0.04	52.63	74.00	-21.37	peak
2	5460.000	49.12	0.51	49.63	74.00	-24.37	peak
3	5470.000	49.24	0.52	49.76	68.20	-18.44	peak
4	5546.400	86.41	0.71	87.12	68.20	18.92	peak
5	5725.000	50.07	1.18	51.25	68.20	-16.95	peak
6	5974.400	52.32	1.85	54.17	68.20	-14.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5610 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

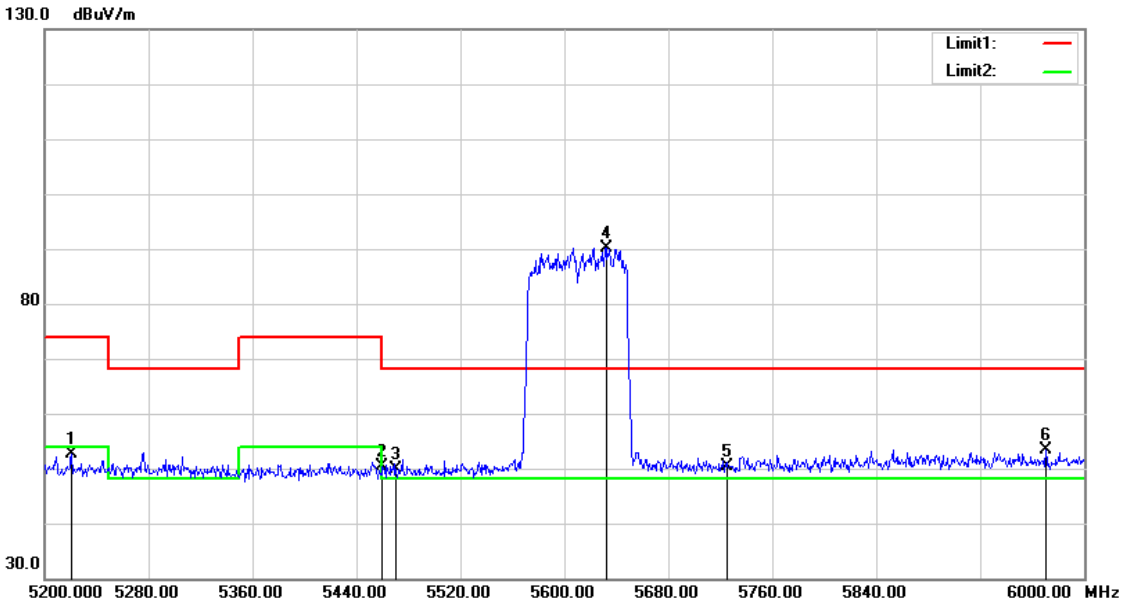


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5220.800	52.46	0.06	52.52	74.00	-21.48	peak
2	5460.000	49.88	0.51	50.39	74.00	-23.61	peak
3	5470.000	49.25	0.52	49.77	68.20	-18.43	peak
4	5632.000	89.29	0.93	90.22	68.20	22.02	peak
5	5725.000	49.12	1.18	50.30	68.20	-17.90	peak
6	5970.400	51.61	1.84	53.45	68.20	-14.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5610 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

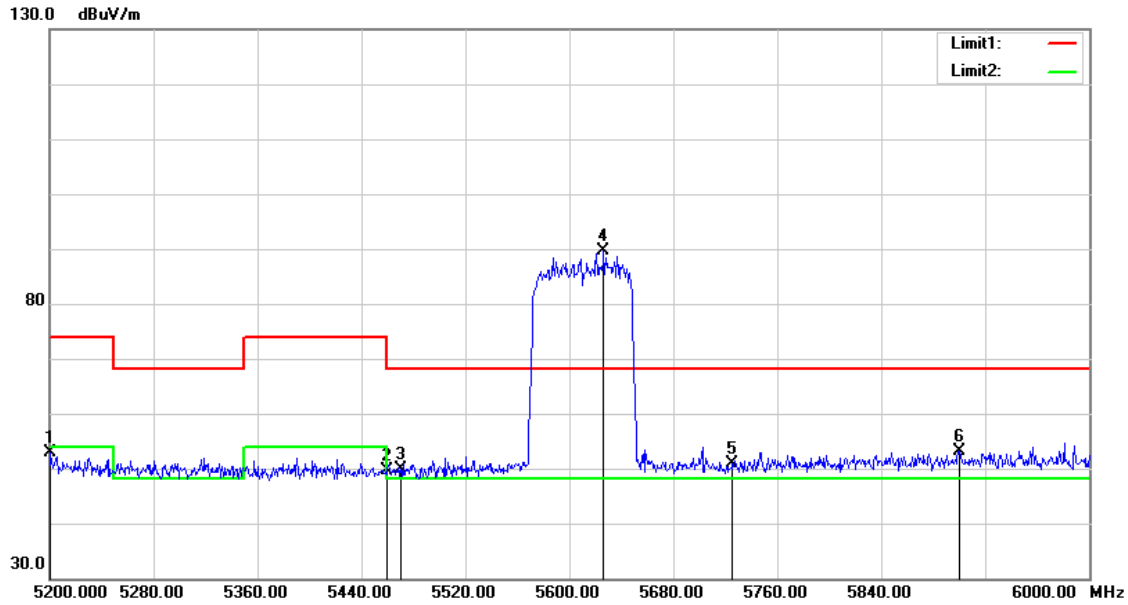


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5200.800	52.90	0.02	52.92	74.00	-21.08	peak
2	5460.000	49.20	0.51	49.71	74.00	-24.29	peak
3	5470.000	49.25	0.52	49.77	68.20	-18.43	peak
4	5626.400	88.72	0.92	89.64	68.20	21.44	peak
5	5725.000	49.76	1.18	50.94	68.20	-17.26	peak
6	5900.000	51.52	1.65	53.17	68.20	-15.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

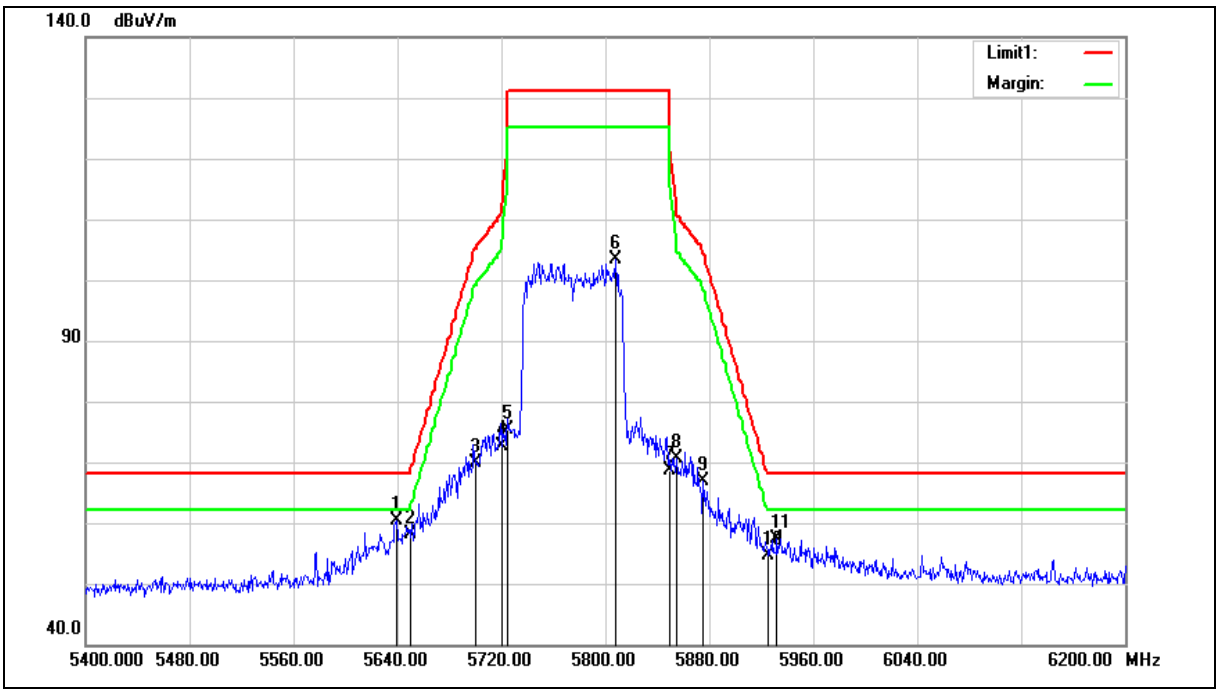

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5639.200	59.36	0.96	60.32	68.20	-7.88	peak
2	5650.000	57.15	0.97	58.12	68.20	-10.08	peak
3	5700.000	68.84	1.11	69.95	105.20	-35.25	peak
4	5720.000	71.47	1.17	72.64	110.80	-38.16	peak
5	5725.000	74.27	1.18	75.45	122.20	-46.75	peak
6	5808.000	102.00	1.40	103.40	131.20	-27.80	peak
7	5850.000	67.12	1.52	68.64	122.20	-53.56	peak
8	5855.000	69.08	1.53	70.61	110.80	-40.19	peak
9	5875.000	65.30	1.59	66.89	105.20	-38.31	peak
10	5925.000	52.91	1.72	54.63	68.20	-13.57	peak
11	5932.000	55.64	1.74	57.38	68.20	-10.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

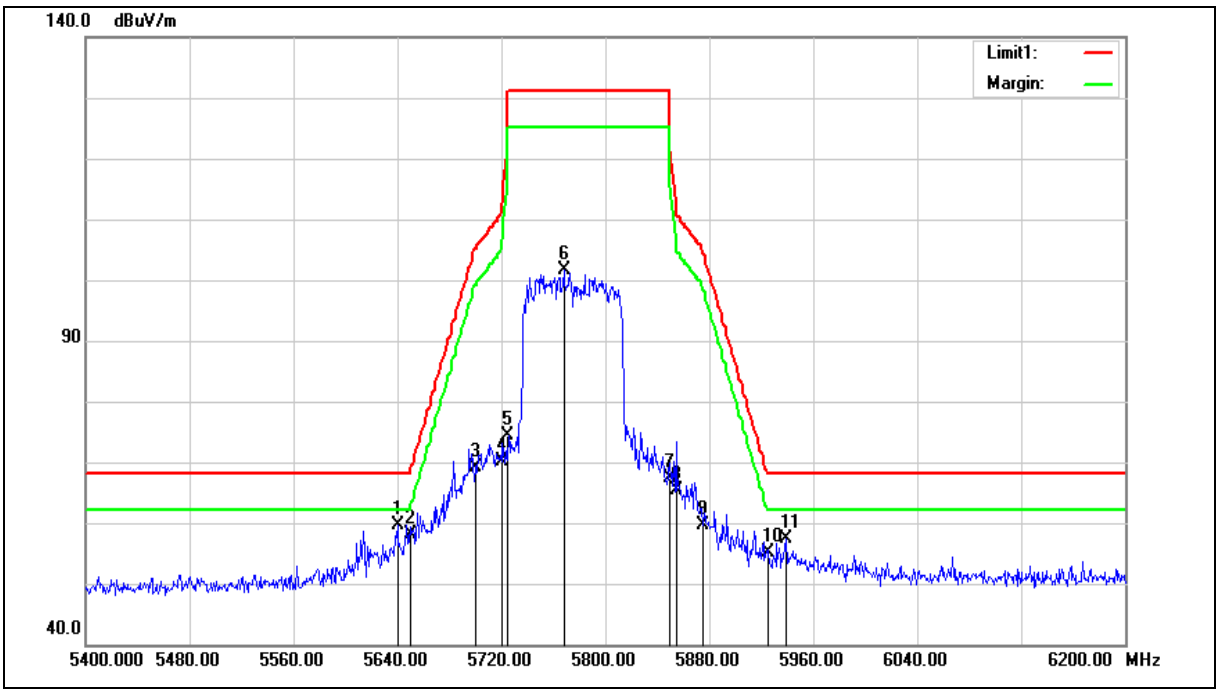

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5640.000	58.74	0.96	59.70	68.20	-8.50	peak
2	5650.000	57.25	0.97	58.22	68.20	-9.98	peak
3	5700.000	68.01	1.11	69.12	105.20	-36.08	peak
4	5720.000	69.00	1.17	70.17	110.80	-40.63	peak
5	5725.000	73.17	1.18	74.35	122.20	-47.85	peak
6	5768.000	100.44	1.29	101.73	131.20	-29.47	peak
7	5850.000	65.89	1.52	67.41	122.20	-54.79	peak
8	5855.000	63.75	1.53	65.28	110.80	-45.52	peak
9	5875.000	57.99	1.59	59.58	105.20	-45.62	peak
10	5925.000	53.51	1.72	55.23	68.20	-12.97	peak
11	5939.200	55.73	1.76	57.49	68.20	-10.71	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Average

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

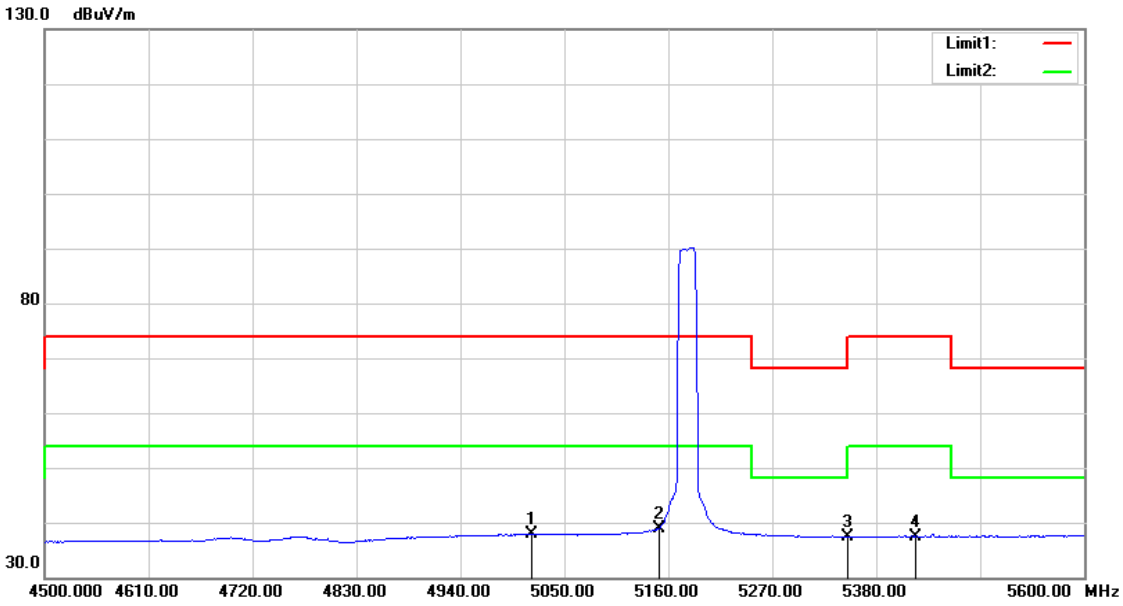


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5014.800	38.17	-0.33	37.84	54.00	-16.16	AVG
2	5150.000	39.02	-0.08	38.94	54.00	-15.06	AVG
3	5350.000	37.06	0.30	37.36	54.00	-16.64	AVG
4	5421.800	37.04	0.43	37.47	54.00	-16.53	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

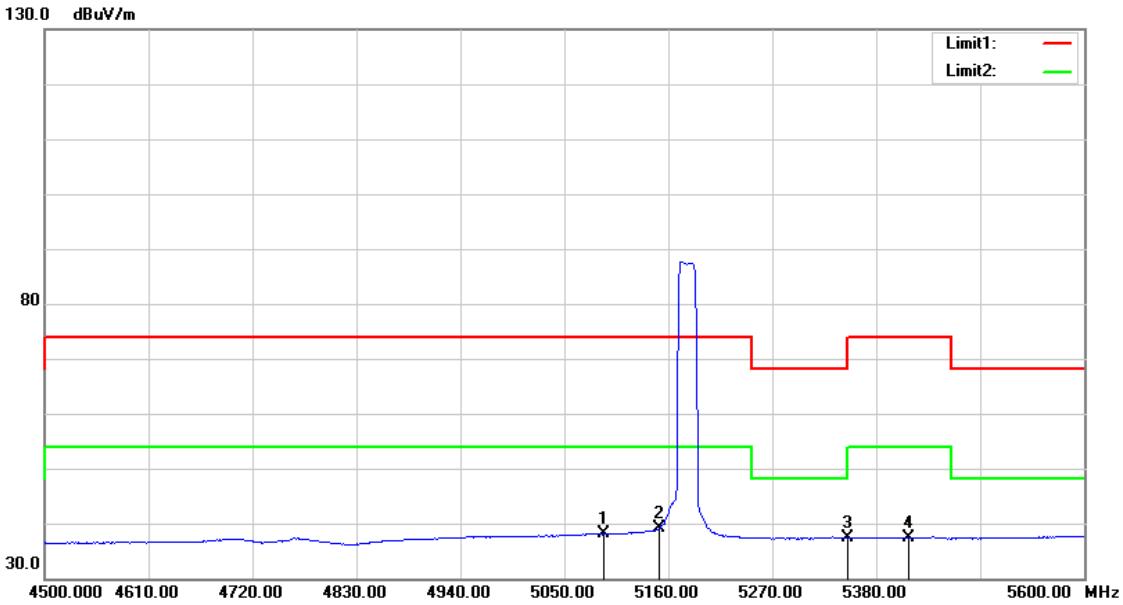


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5091.800	38.27	-0.19	38.08	54.00	-15.92	AVG
2	5150.000	39.11	-0.08	39.03	54.00	-14.97	AVG
3	5350.000	37.00	0.30	37.30	54.00	-16.70	AVG
4	5414.100	36.97	0.41	37.38	54.00	-16.62	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

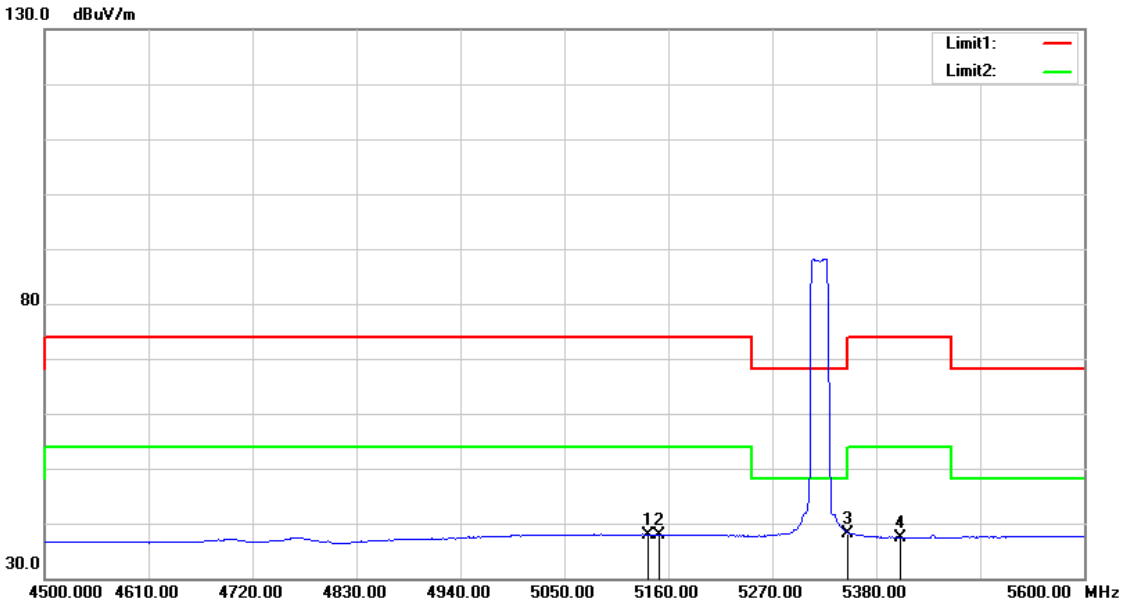


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5138.000	37.95	-0.10	37.85	54.00	-16.15	AVG
2	5150.000	37.88	-0.08	37.80	54.00	-16.20	AVG
3	5350.000	37.95	0.30	38.25	54.00	-15.75	AVG
4	5405.300	37.03	0.40	37.43	54.00	-16.57	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

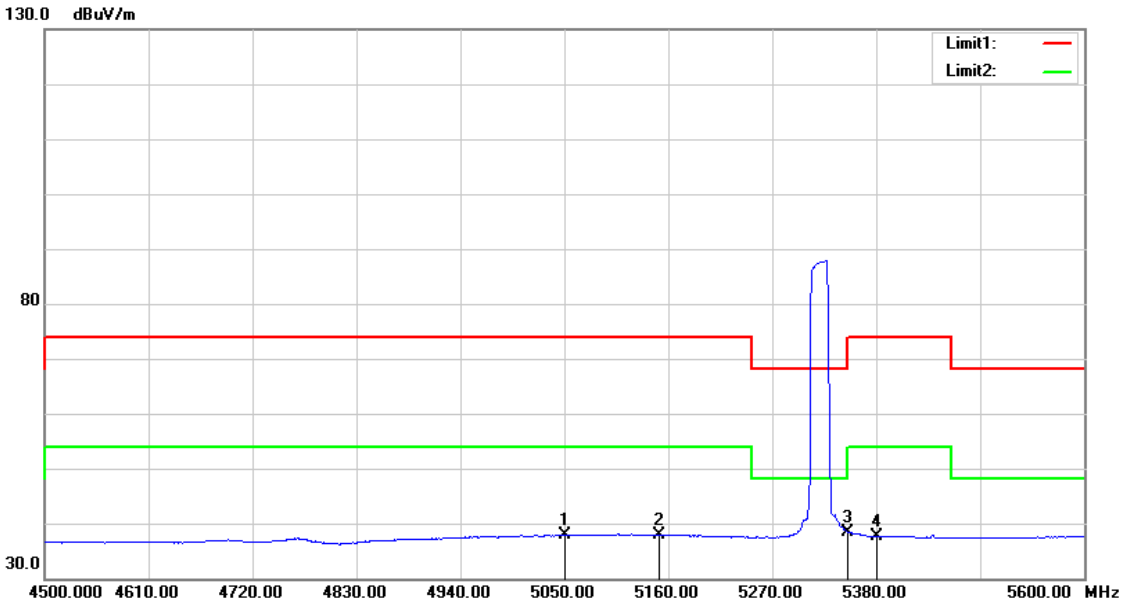


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5050.000	38.14	-0.26	37.88	54.00	-16.12	AVG
2	5150.000	37.99	-0.08	37.91	54.00	-16.09	AVG
3	5350.000	38.16	0.30	38.46	54.00	-15.54	AVG
4	5380.000	37.35	0.35	37.70	54.00	-16.30	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

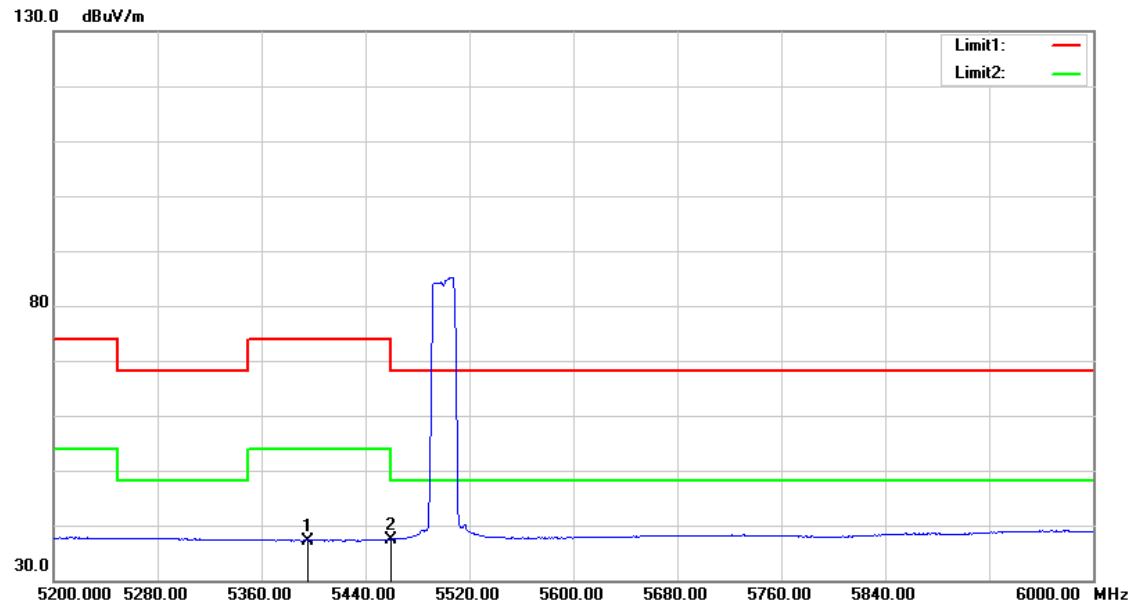


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5396.000	36.86	0.38	37.24	54.00	-16.76	AVG
2	5460.000	36.98	0.51	37.49	54.00	-16.51	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

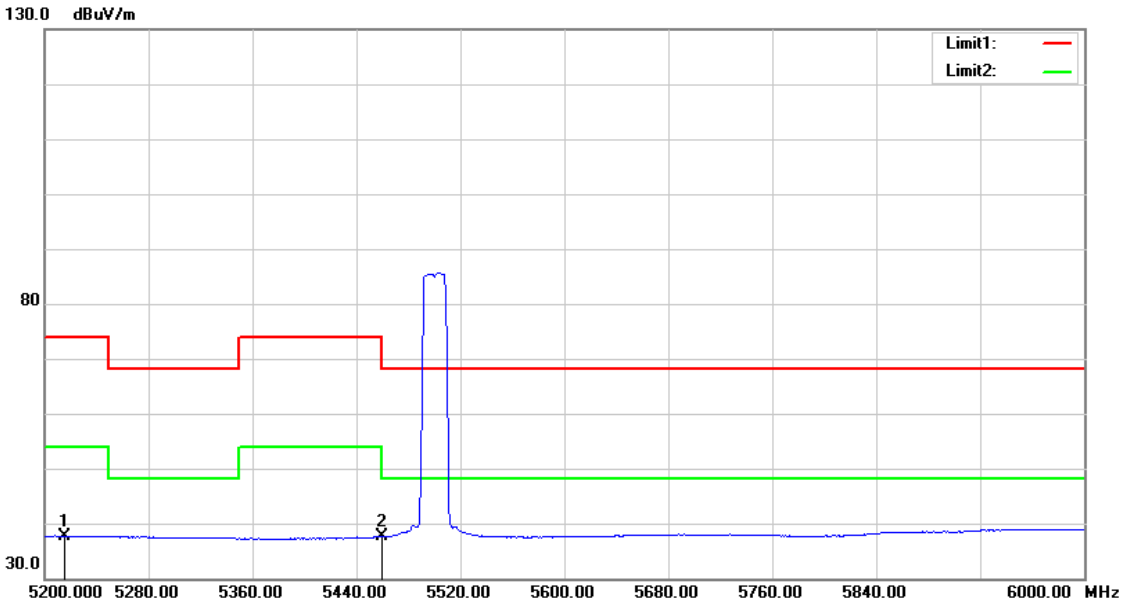


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5215.200	37.59	0.04	37.63	54.00	-16.37	AVG
2	5460.000	37.13	0.51	37.64	54.00	-16.36	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

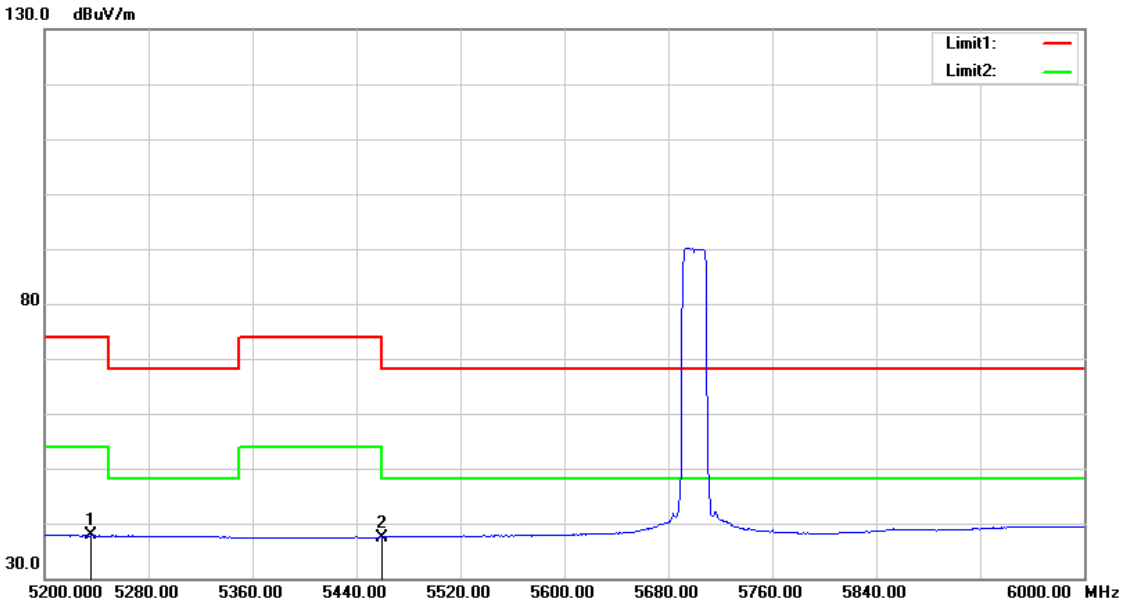


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5235.200	37.69	0.08	37.77	54.00	-16.23	AVG
2	5460.000	36.96	0.51	37.47	54.00	-16.53	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

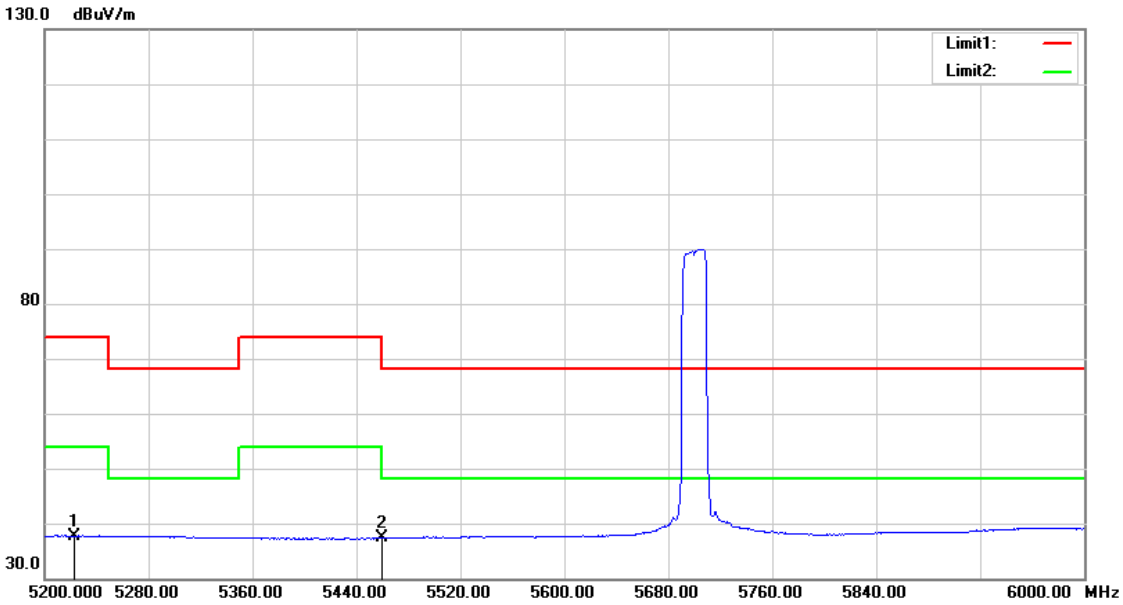


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5222.400	37.65	0.06	37.71	54.00	-16.29	AVG
2	5460.000	36.87	0.51	37.38	54.00	-16.62	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

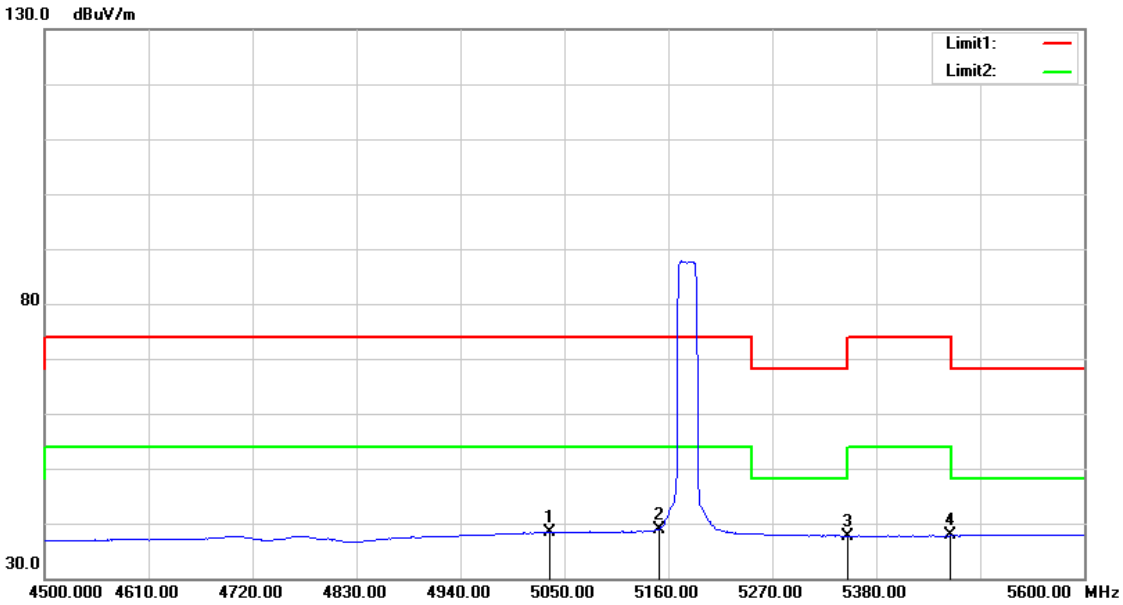


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5034.600	38.60	-0.29	38.31	54.00	-15.69	AVG
2	5150.000	38.96	-0.08	38.88	54.00	-15.12	AVG
3	5350.000	37.37	0.30	37.67	54.00	-16.33	AVG
4	5458.100	37.29	0.50	37.79	54.00	-16.21	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

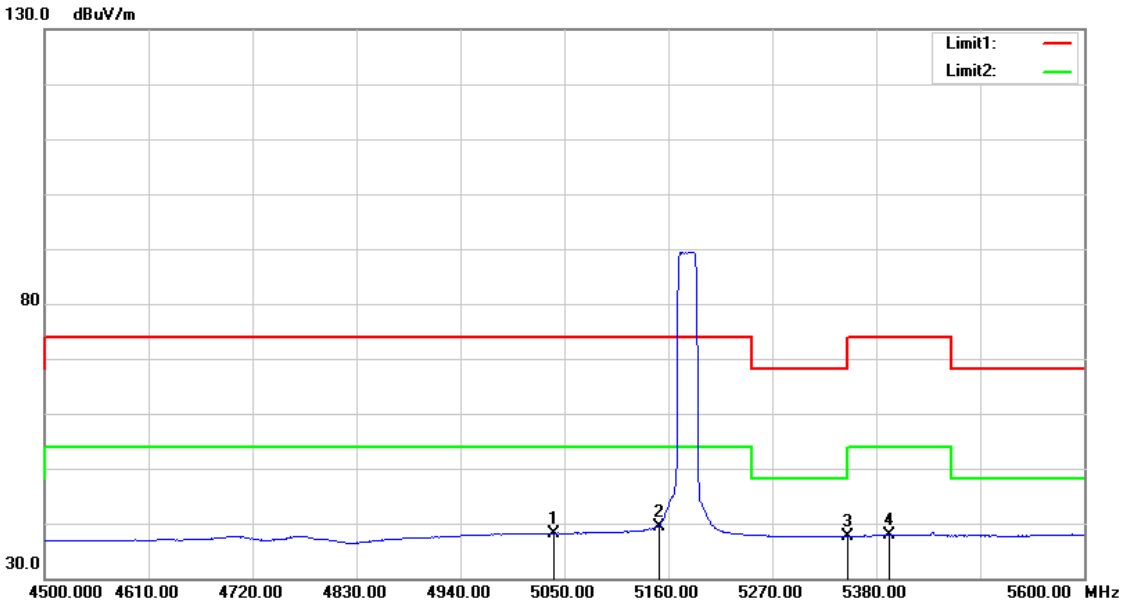


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5039.000	38.49	-0.29	38.20	54.00	-15.80	AVG
2	5150.000	39.58	-0.08	39.50	54.00	-14.50	AVG
3	5350.000	37.32	0.30	37.62	54.00	-16.38	AVG
4	5394.300	37.47	0.38	37.85	54.00	-16.15	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

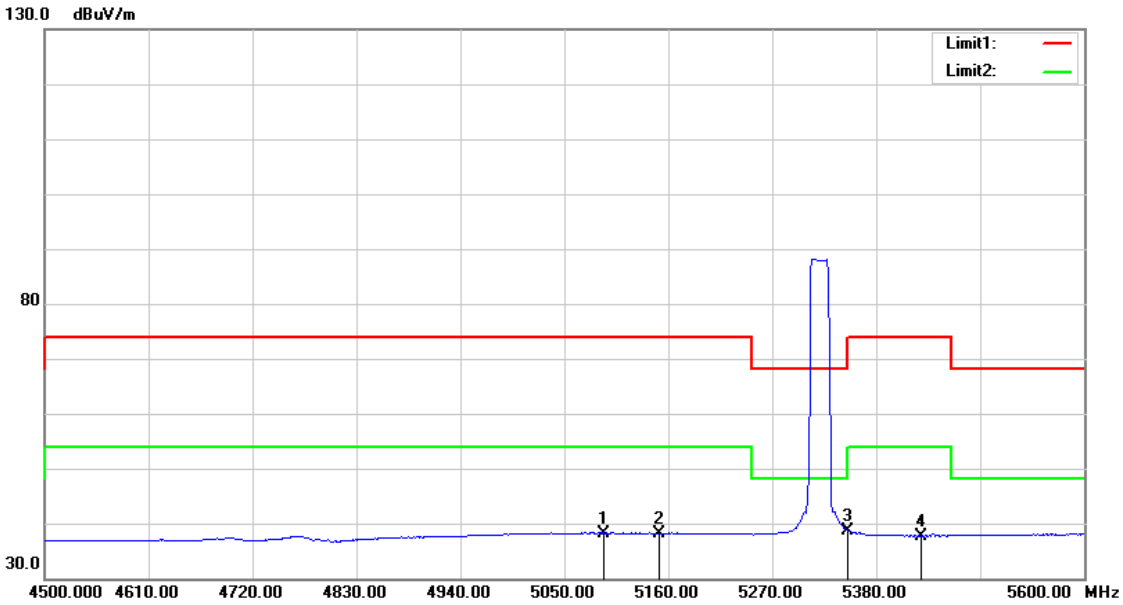


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5091.800	38.37	-0.19	38.18	54.00	-15.82	AVG
2	5150.000	38.29	-0.08	38.21	54.00	-15.79	AVG
3	5350.000	38.33	0.30	38.63	54.00	-15.37	AVG
4	5427.300	37.26	0.44	37.70	54.00	-16.30	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

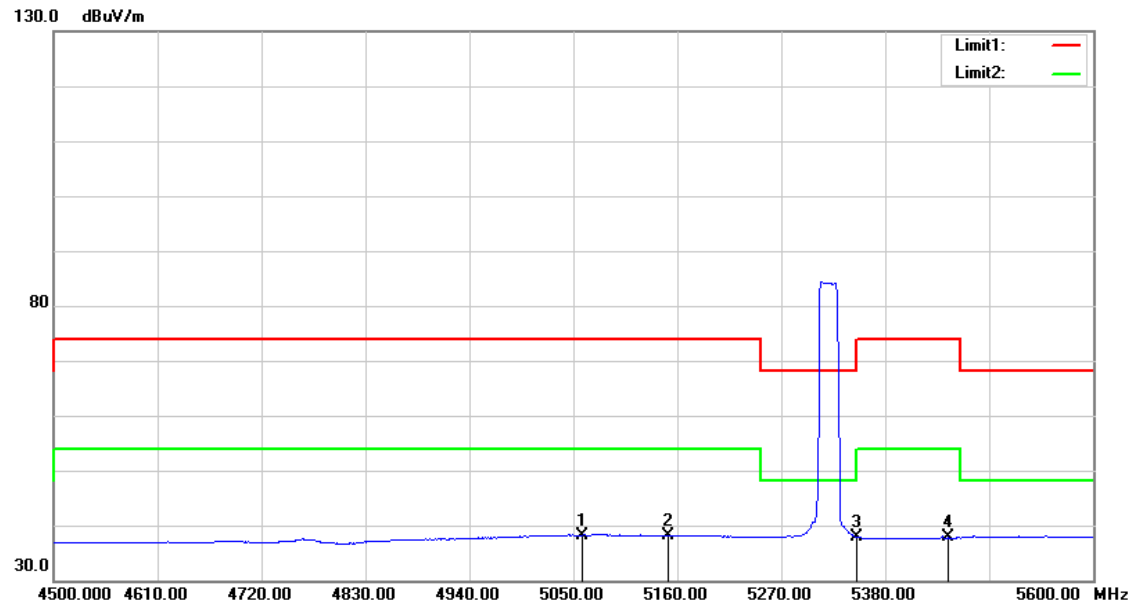


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5059.900	38.42	-0.25	38.17	54.00	-15.83	AVG
2	5150.000	38.16	-0.08	38.08	54.00	-15.92	AVG
3	5350.000	37.52	0.30	37.82	54.00	-16.18	AVG
4	5446.000	37.30	0.48	37.78	54.00	-16.22	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

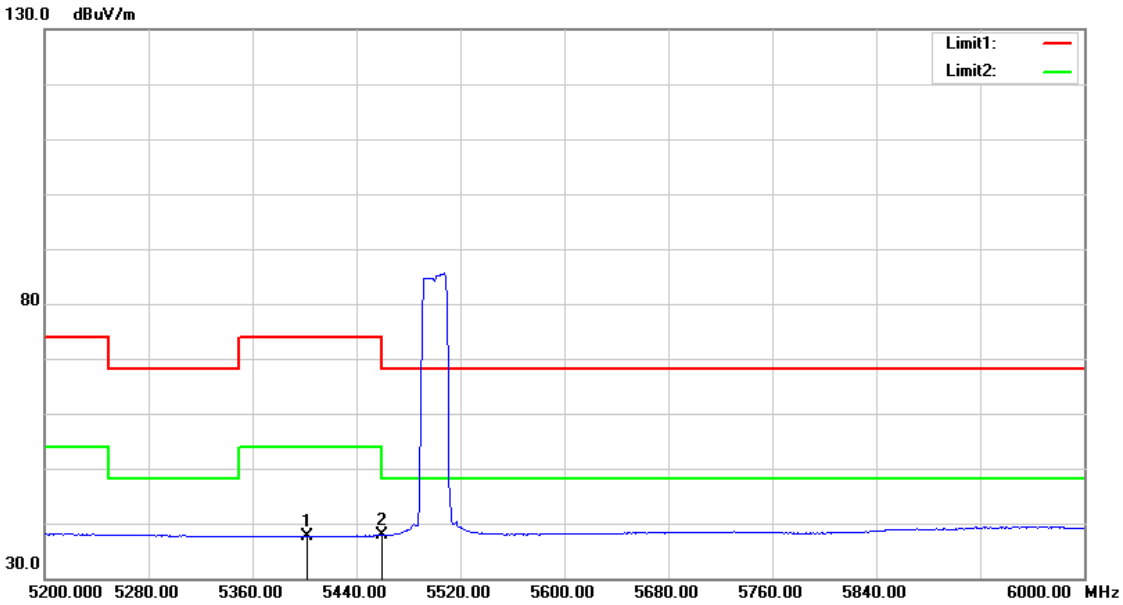


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5401.600	37.23	0.39	37.62	54.00	-16.38	AVG
2	5460.000	37.40	0.51	37.91	54.00	-16.09	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

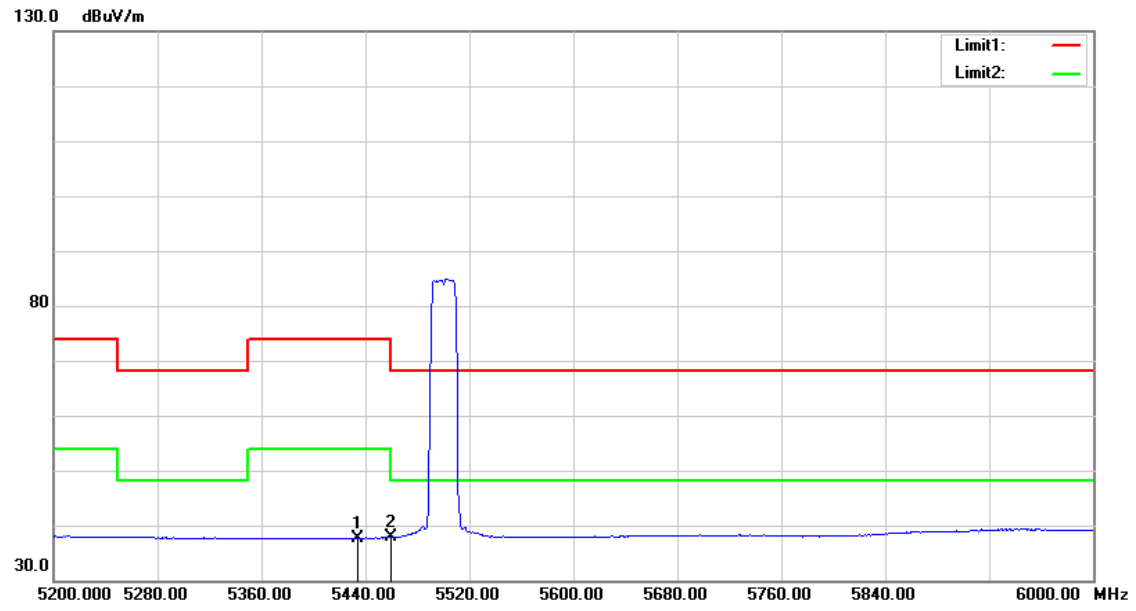


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5433.600	37.16	0.46	37.62	54.00	-16.38	AVG
2	5460.000	37.37	0.51	37.88	54.00	-16.12	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

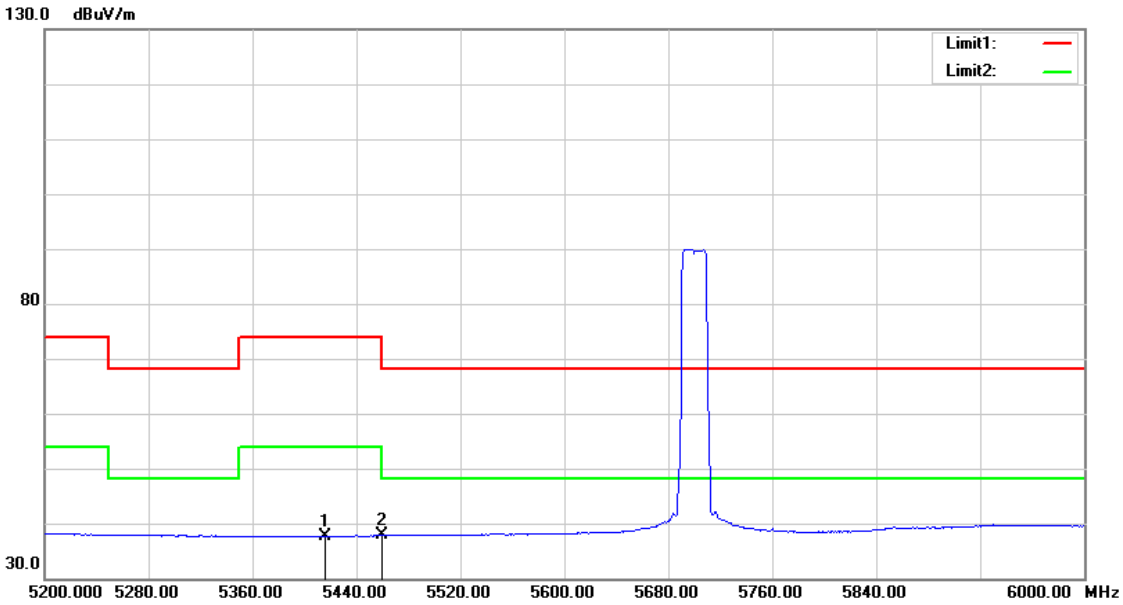


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5416.000	37.22	0.41	37.63	54.00	-16.37	AVG
2	5460.000	37.25	0.51	37.76	54.00	-16.24	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

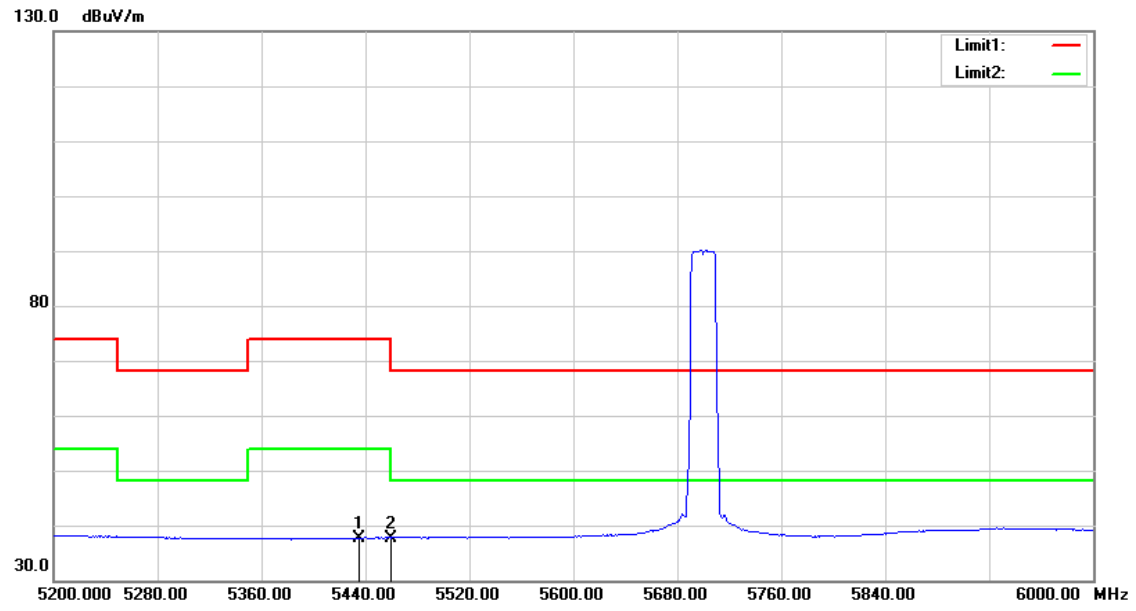


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5435.200	37.19	0.46	37.65	54.00	-16.35	AVG
2	5460.000	37.21	0.51	37.72	54.00	-16.28	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

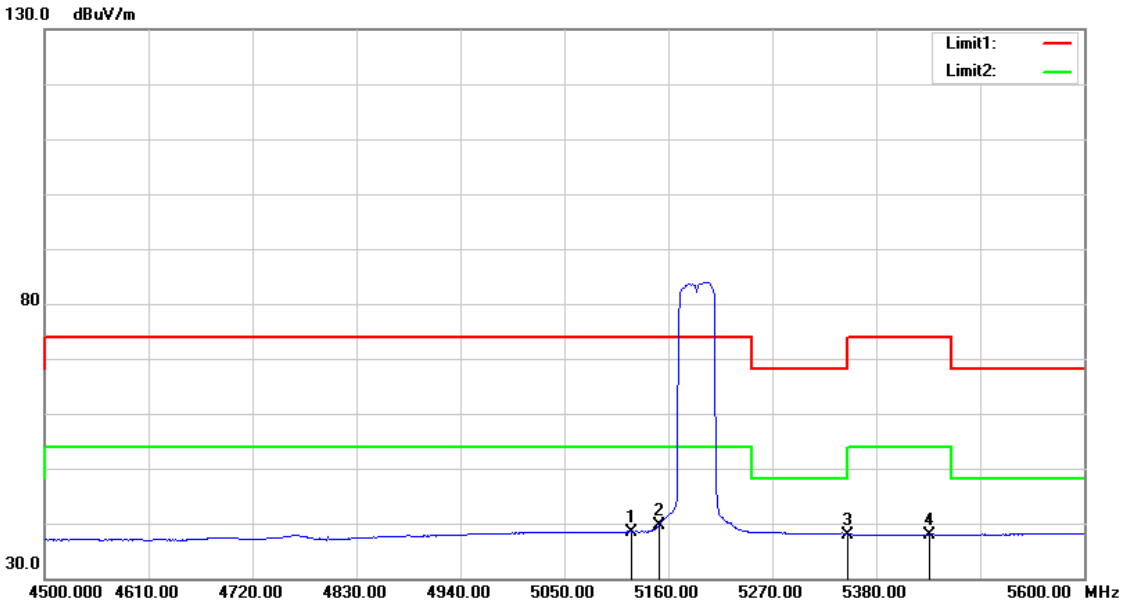


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5121.500	38.53	-0.13	38.40	54.00	-15.60	AVG
2	5150.000	39.72	-0.08	39.64	54.00	-14.36	AVG
3	5350.000	37.69	0.30	37.99	54.00	-16.01	AVG
4	5436.100	37.36	0.46	37.82	54.00	-16.18	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

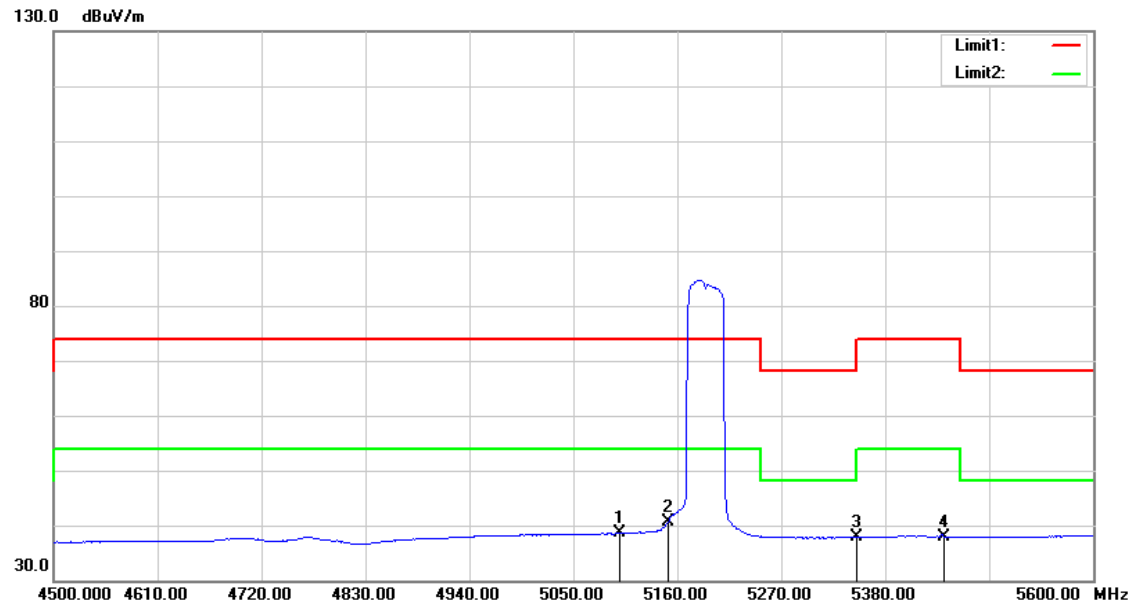


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5098.400	38.70	-0.18	38.52	54.00	-15.48	AVG
2	5150.000	40.62	-0.08	40.54	54.00	-13.46	AVG
3	5350.000	37.54	0.30	37.84	54.00	-16.16	AVG
4	5441.600	37.47	0.46	37.93	54.00	-16.07	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

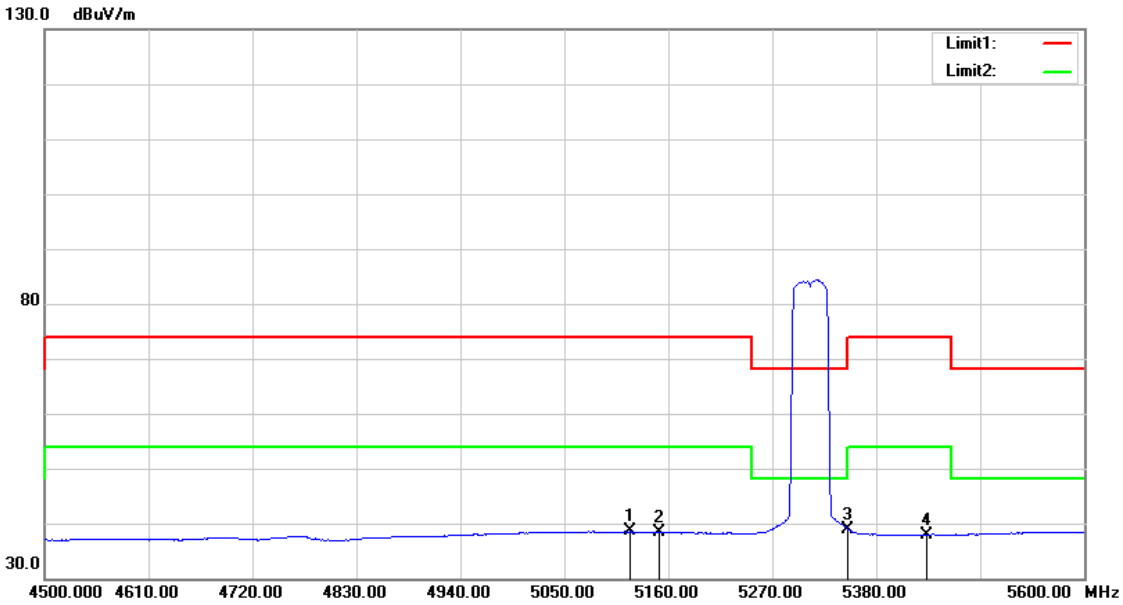


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5119.300	38.68	-0.13	38.55	54.00	-15.45	AVG
2	5150.000	38.43	-0.08	38.35	54.00	-15.65	AVG
3	5350.000	38.57	0.30	38.87	54.00	-15.13	AVG
4	5433.900	37.36	0.46	37.82	54.00	-16.18	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

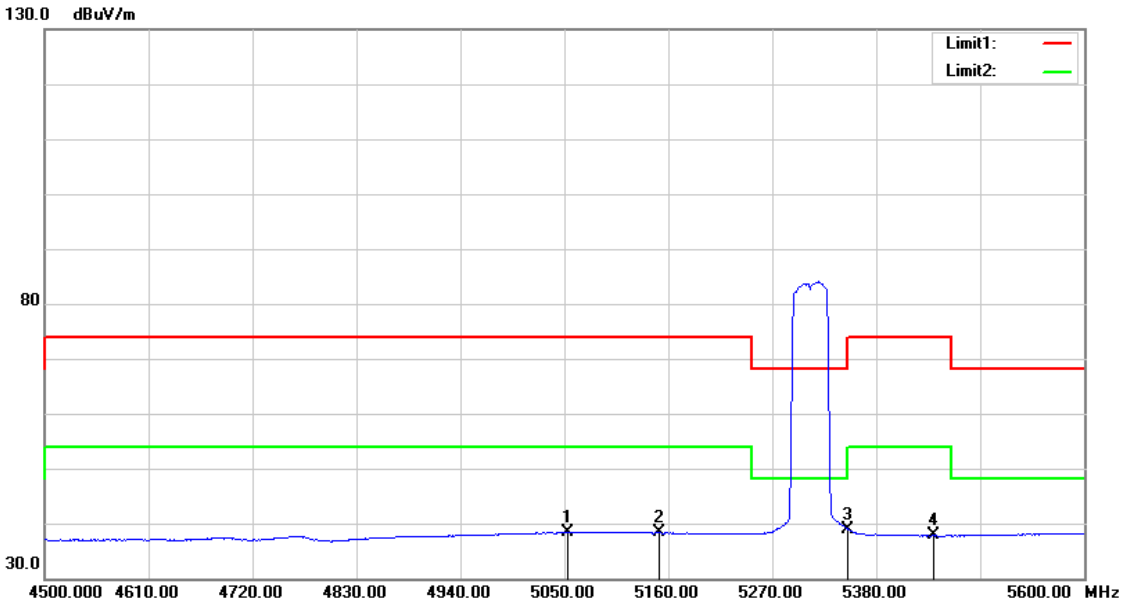


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5053.300	38.57	-0.26	38.31	54.00	-15.69	AVG
2	5150.000	38.36	-0.08	38.28	54.00	-15.72	AVG
3	5350.000	38.54	0.30	38.84	54.00	-15.16	AVG
4	5440.500	37.34	0.46	37.80	54.00	-16.20	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

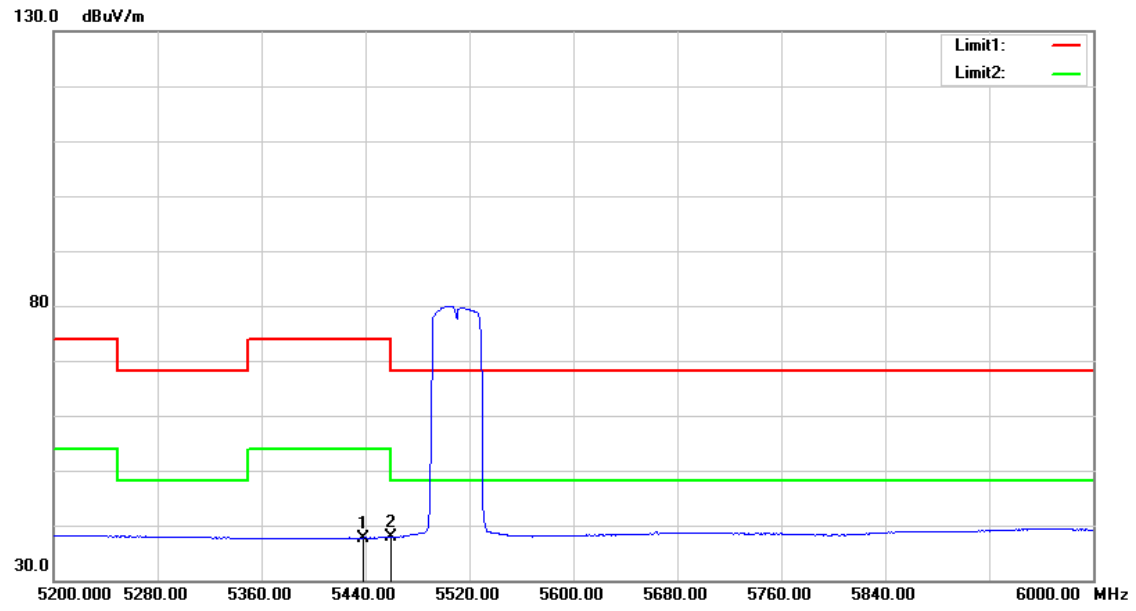


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5438.400	37.22	0.46	37.68	54.00	-16.32	AVG
2	5460.000	37.34	0.51	37.85	54.00	-16.15	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

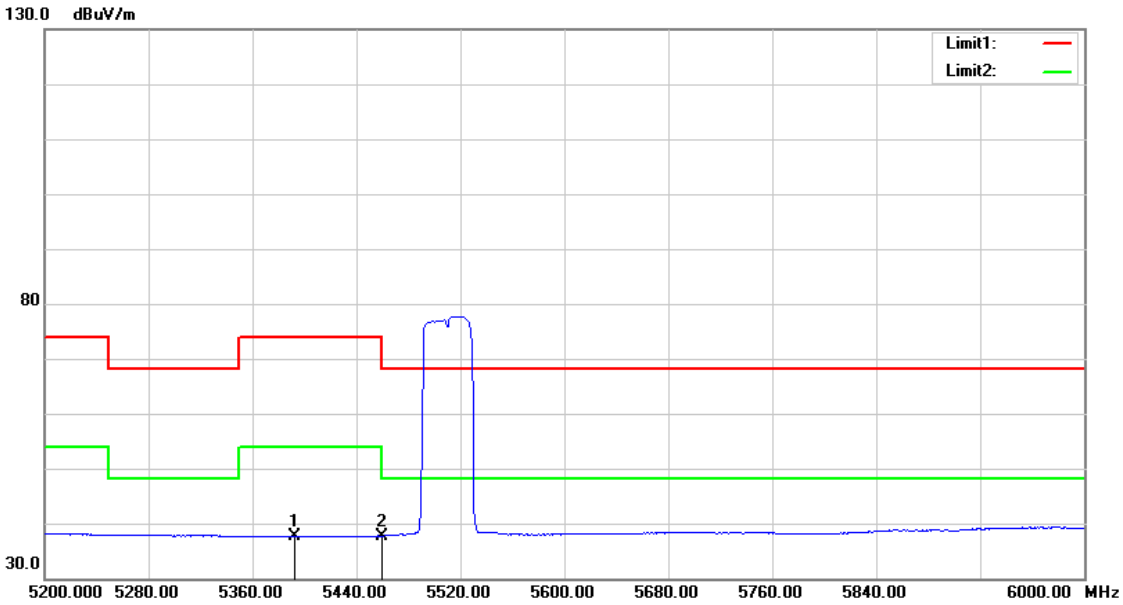


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5392.000	37.21	0.37	37.58	54.00	-16.42	AVG
2	5460.000	37.22	0.51	37.73	54.00	-16.27	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

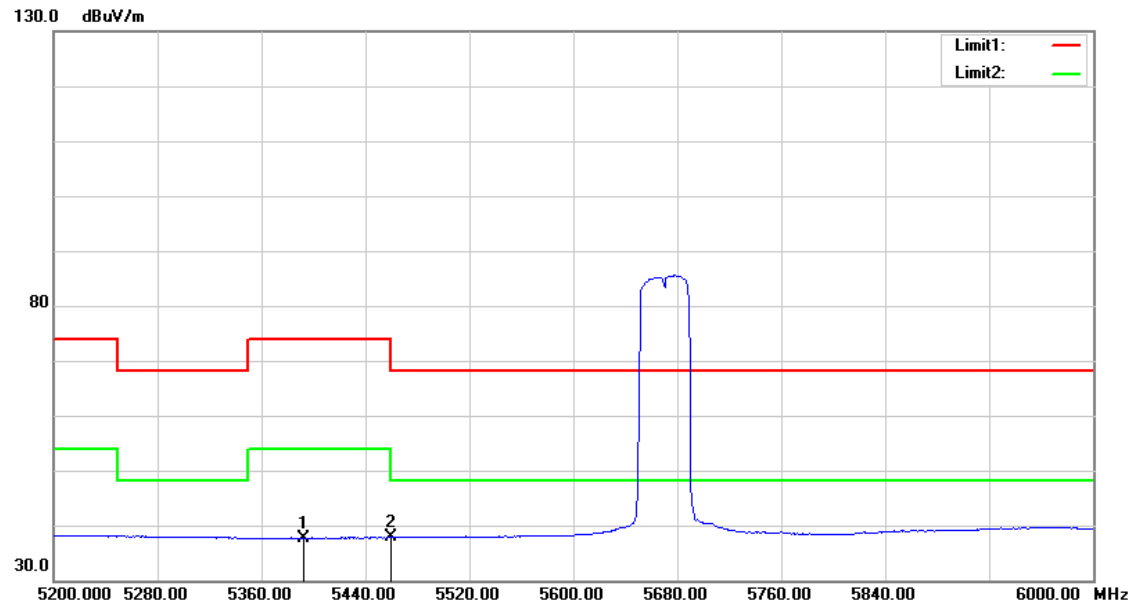


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5392.000	37.35	0.37	37.72	54.00	-16.28	AVG
2	5460.000	37.25	0.51	37.76	54.00	-16.24	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

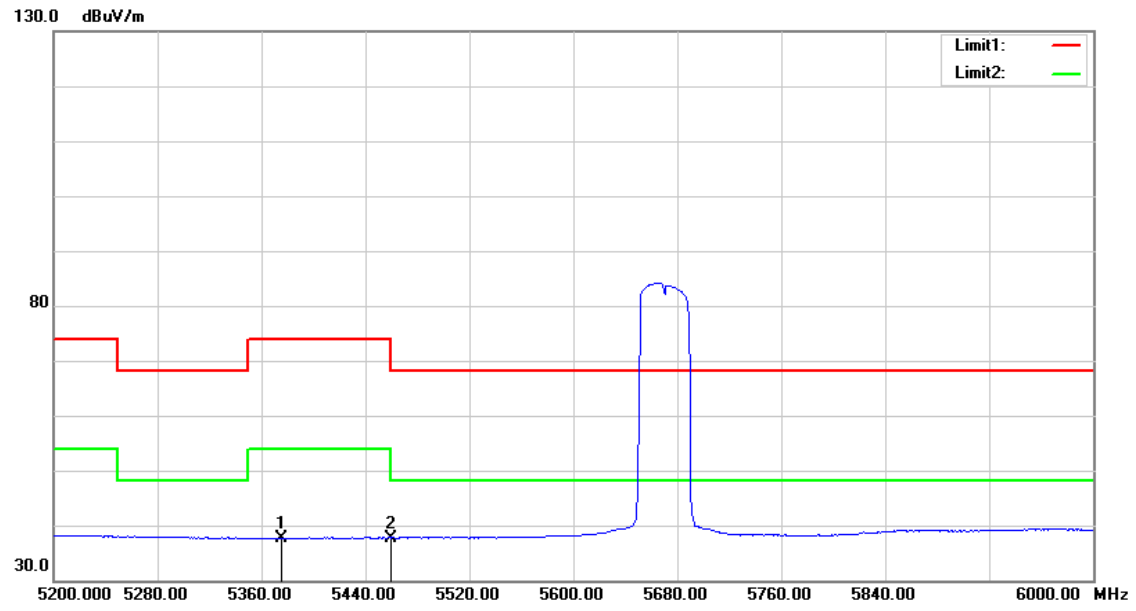


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5375.200	37.29	0.34	37.63	54.00	-16.37	AVG
2	5460.000	37.19	0.51	37.70	54.00	-16.30	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

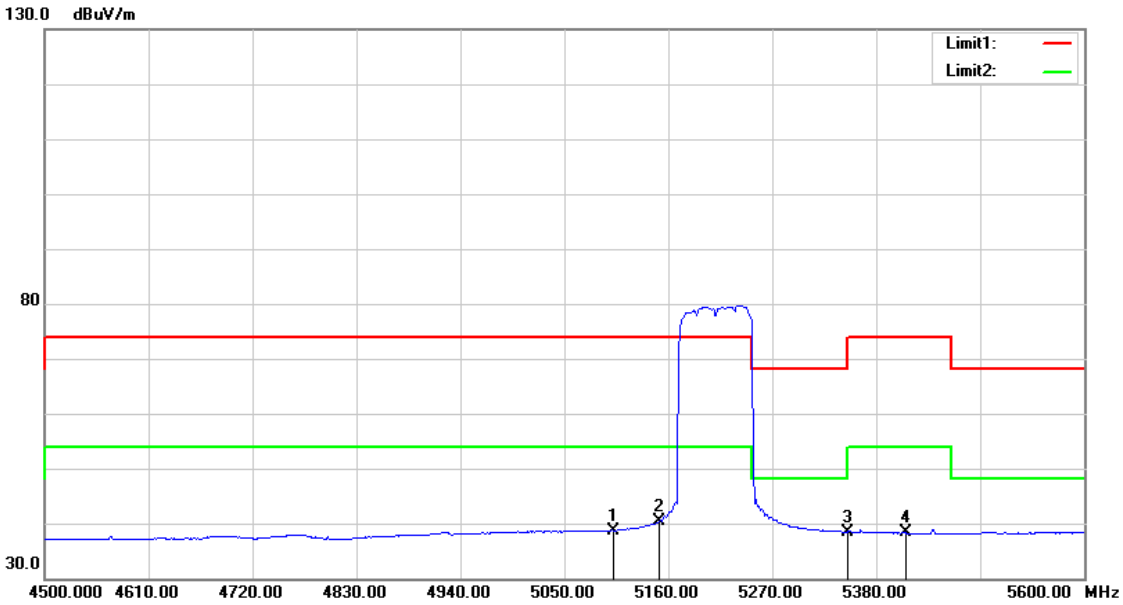


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5101.700	38.91	-0.18	38.73	54.00	-15.27	AVG
2	5150.000	40.42	-0.08	40.34	54.00	-13.66	AVG
3	5350.000	38.18	0.30	38.48	54.00	-15.52	AVG
4	5411.900	37.86	0.41	38.27	54.00	-15.73	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

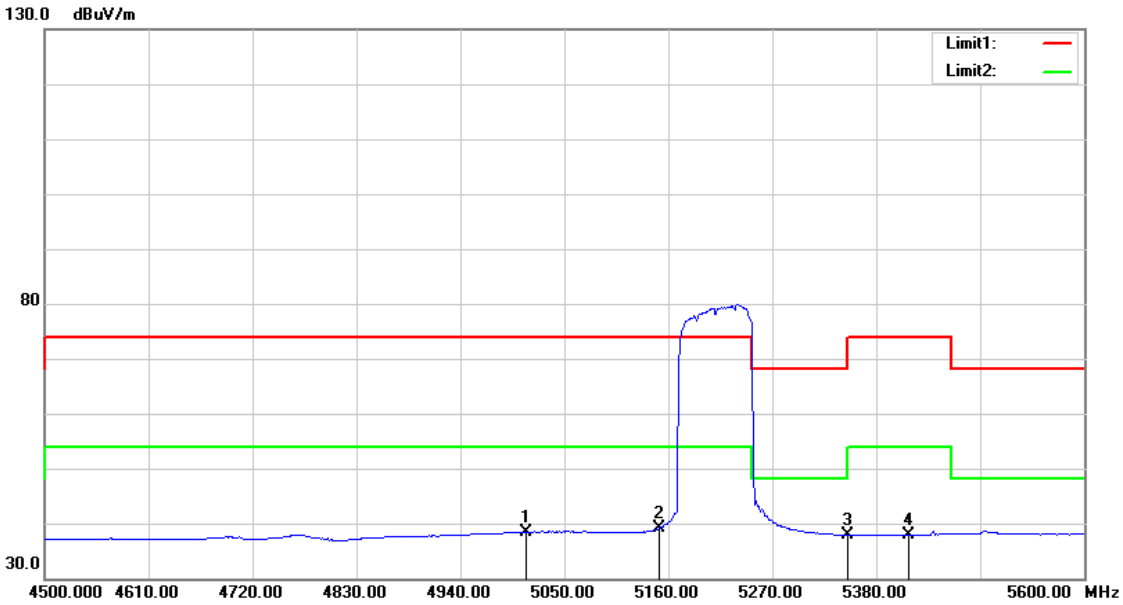


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5009.300	38.79	-0.34	38.45	54.00	-15.55	AVG
2	5150.000	39.20	-0.08	39.12	54.00	-14.88	AVG
3	5350.000	37.56	0.30	37.86	54.00	-16.14	AVG
4	5414.100	37.44	0.41	37.85	54.00	-16.15	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

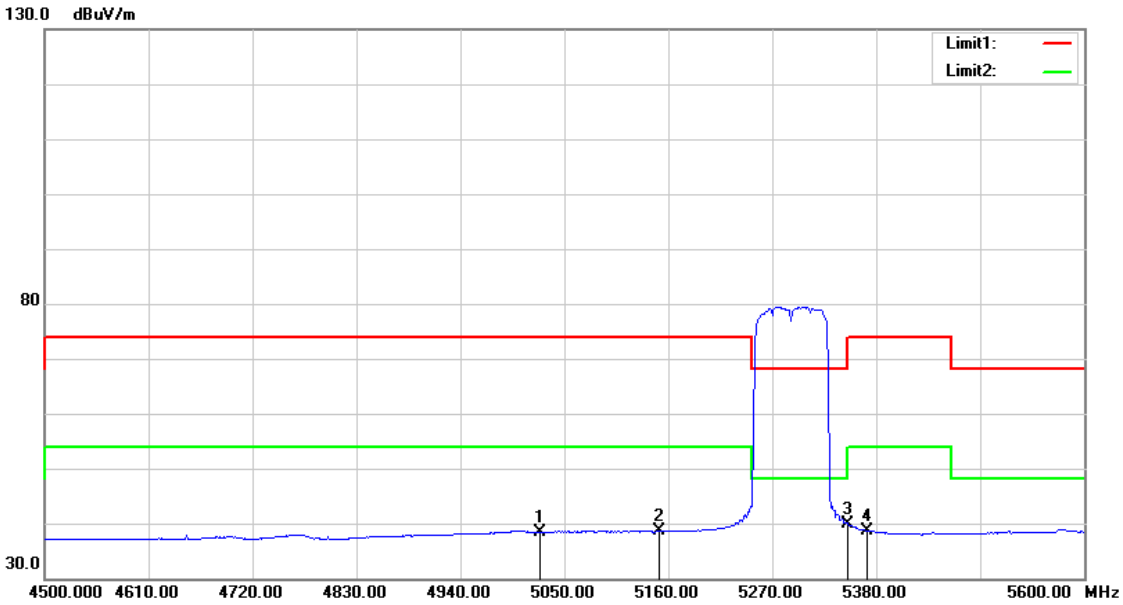


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5023.600	38.77	-0.31	38.46	54.00	-15.54	AVG
2	5150.000	38.65	-0.08	38.57	54.00	-15.43	AVG
3	5350.000	39.66	0.30	39.96	54.00	-14.04	AVG
4	5370.100	38.35	0.34	38.69	54.00	-15.31	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

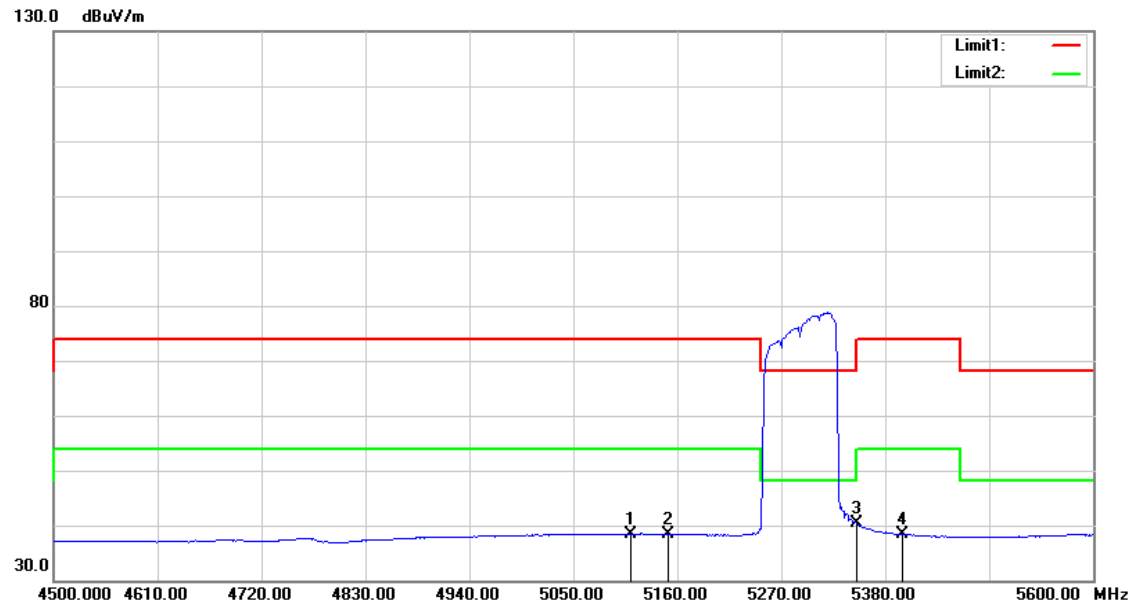


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5110.500	38.61	-0.15	38.46	54.00	-15.54	AVG
2	5150.000	38.47	-0.08	38.39	54.00	-15.61	AVG
3	5350.000	40.04	0.30	40.34	54.00	-13.66	AVG
4	5398.700	37.96	0.39	38.35	54.00	-15.65	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

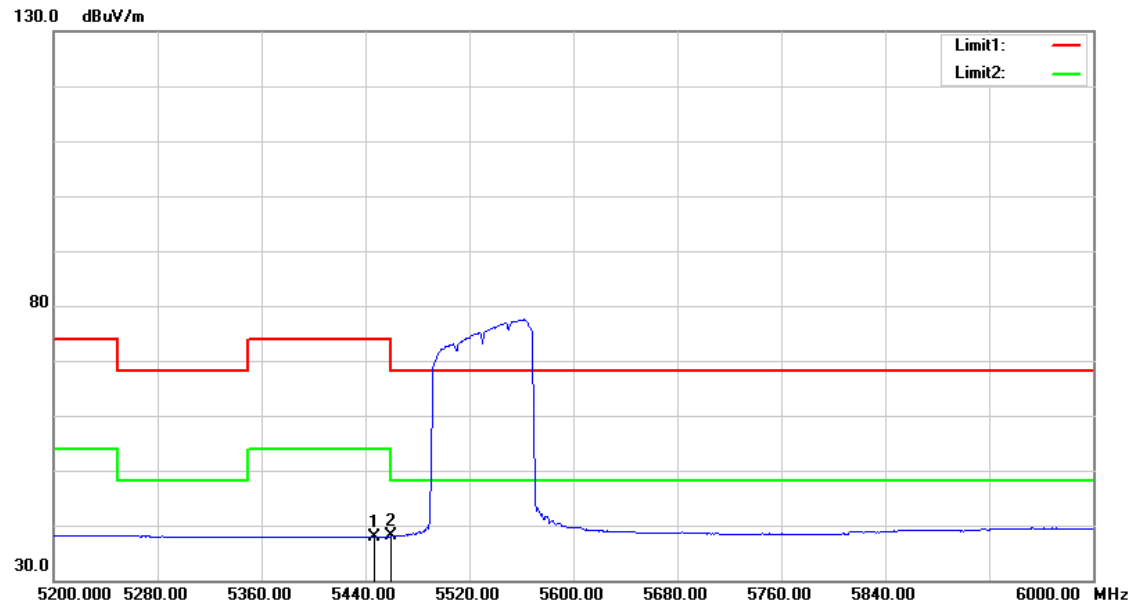


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5447.200	37.42	0.48	37.90	54.00	-16.10	AVG
2	5460.000	37.56	0.51	38.07	54.00	-15.93	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

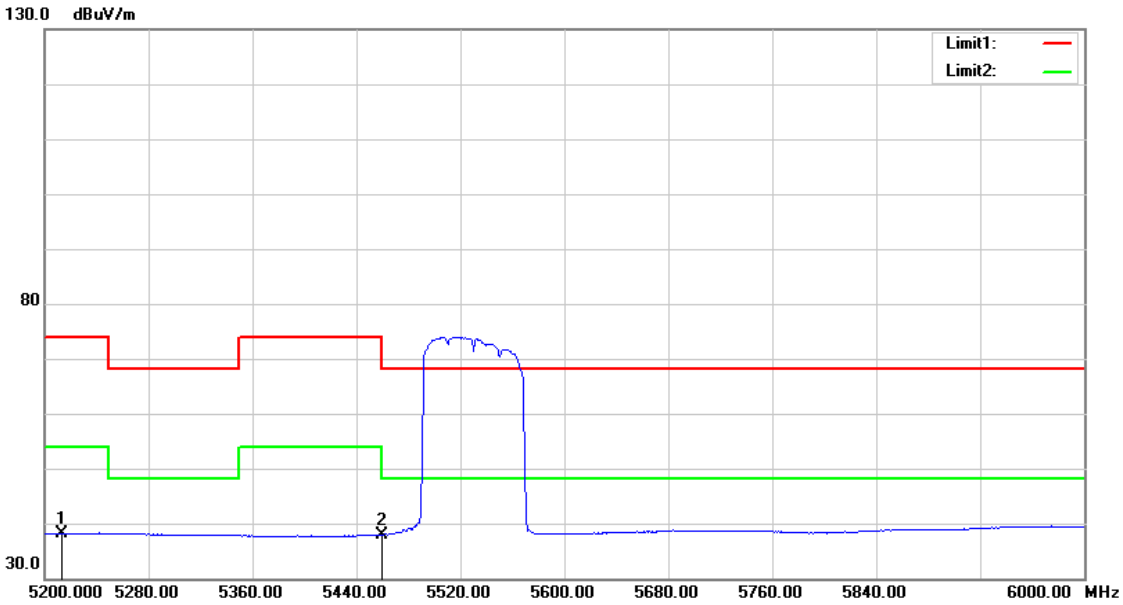


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5213.600	38.14	0.04	38.18	54.00	-15.82	AVG
2	5460.000	37.46	0.51	37.97	54.00	-16.03	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5610 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

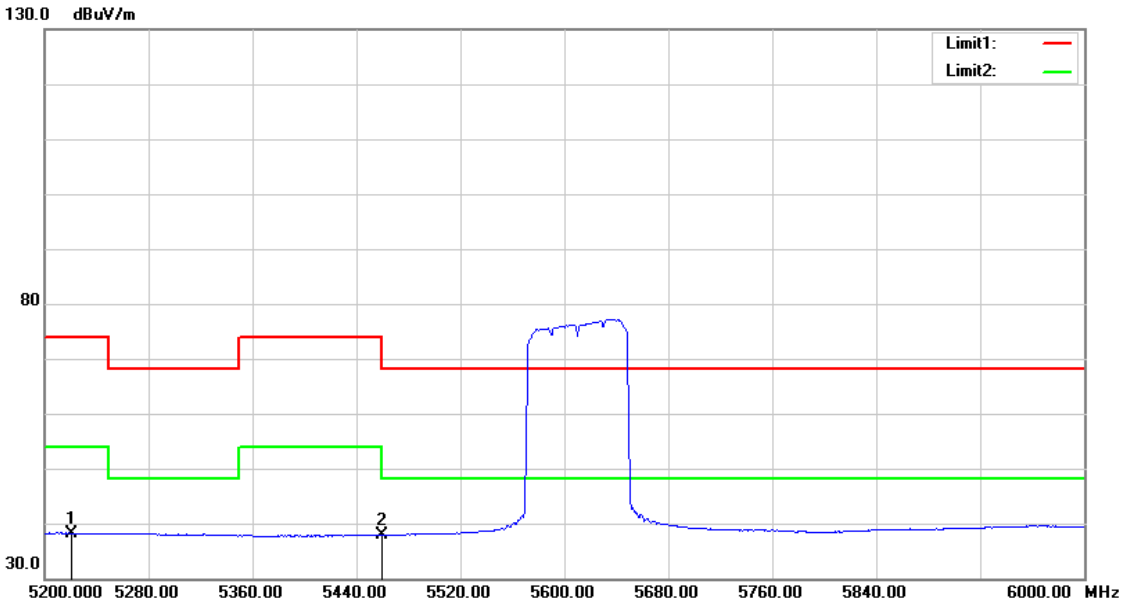


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5220.800	38.17	0.06	38.23	54.00	-15.77	AVG
2	5460.000	37.37	0.51	37.88	54.00	-16.12	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5610 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

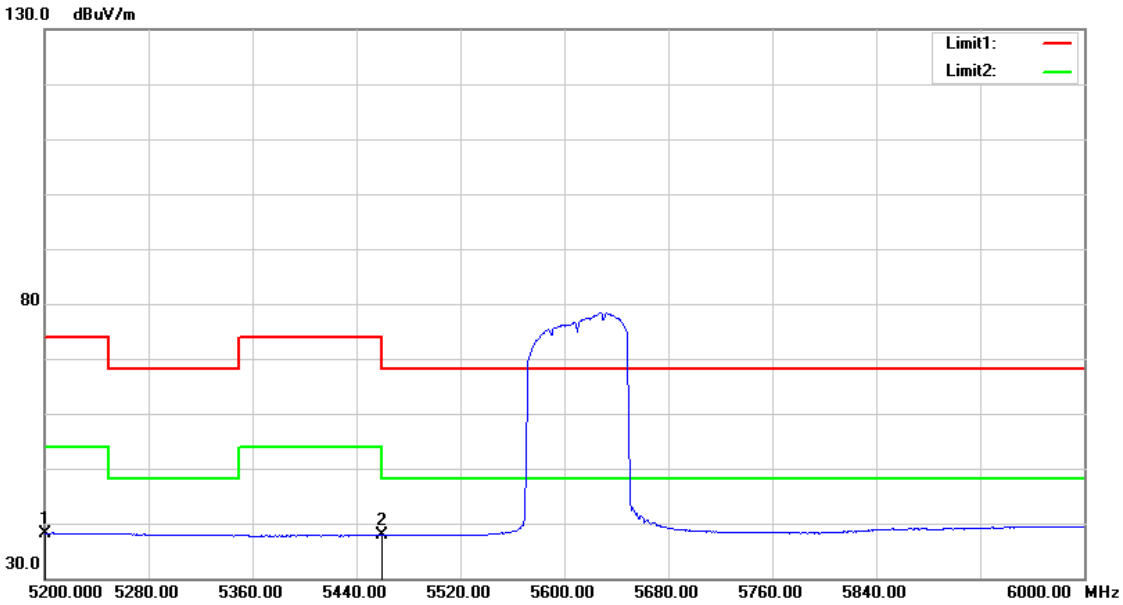

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5200.800	38.22	0.02	38.24	54.00	-15.76	AVG
2	5460.000	37.34	0.51	37.85	54.00	-16.15	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

5.5 Conducted Test Results (5 GHz)

Maximum Conducted Output Power

Test Mode	Data Rate (Mbps)	Frequency (MHz)	Max. Output Power (Average)		
			ANT-0		Limit (dBm)
			dBm	W	
Mode 6	6	5180	8.99	0.008	≤ 24.00
		5200	15.36	0.034	≤ 24.00
		5220	15.29	0.034	≤ 24.00
		5240	15.53	0.036	≤ 24.00
		5260	15.82	0.038	≤ 23.93
		5280	16.13	0.041	≤ 23.93
		5300	16.06	0.040	≤ 23.93
		5320	10.18	0.010	≤ 23.93
		5500	9.08	0.008	≤ 23.92
		5520	15.48	0.035	≤ 23.92
		5540	15.60	0.036	≤ 23.92
		5560	15.68	0.037	≤ 23.92
		5580	15.61	0.036	≤ 23.92
		5600	15.51	0.036	≤ 23.92
		5620	15.29	0.034	≤ 23.92
		5640	15.59	0.036	≤ 23.92
		5660	15.59	0.036	≤ 23.92
		5680	15.58	0.036	≤ 23.92
		5700	9.30	0.009	≤ 23.92
		5745	16.25	0.042	≤ 30.00
		5765	16.22	0.042	≤ 30.00
		5785	16.27	0.042	≤ 30.00
		5805	16.13	0.041	≤ 30.00
		5825	16.02	0.040	≤ 30.00

Test Mode	Data Rate (Mbps)	Frequency (MHz)	Max. Output Power (Average)		
			ANT-0		Limit (dBm)
			dBm	W	
Mode 7	6.5	5180	8.91	0.008	≤ 24.00
		5200	15.30	0.034	≤ 24.00
		5220	15.22	0.033	≤ 24.00
		5240	15.61	0.036	≤ 24.00
		5260	15.90	0.039	≤ 24.00
		5280	16.13	0.041	≤ 24.00
		5300	16.09	0.041	≤ 24.00
		5320	10.34	0.011	≤ 24.00
		5500	9.03	0.008	≤ 24.00
		5520	15.53	0.036	≤ 24.00
		5540	15.47	0.035	≤ 24.00
		5560	15.56	0.036	≤ 24.00
		5580	15.51	0.036	≤ 24.00
		5600	15.31	0.034	≤ 24.00
		5620	15.23	0.033	≤ 24.00
		5640	15.52	0.036	≤ 24.00
		5660	15.50	0.035	≤ 24.00
		5680	15.49	0.035	≤ 24.00
		5700	9.30	0.009	≤ 24.00
		5745	16.11	0.041	≤ 30.00
		5765	16.16	0.041	≤ 30.00
		5785	16.20	0.042	≤ 30.00
		5805	16.17	0.041	≤ 30.00
		5825	15.98	0.040	≤ 30.00
Mode 8	13.5	5190	8.34	0.007	≤ 24.00
		5230	16.24	0.042	≤ 24.00
		5270	17.04	0.051	≤ 24.00
		5310	9.41	0.009	≤ 24.00
		5510	7.89	0.006	≤ 24.00
		5550	15.58	0.036	≤ 24.00
		5590	15.49	0.035	≤ 24.00
		5630	14.97	0.031	≤ 24.00
		5670	7.73	0.006	≤ 24.00
		5755	15.84	0.038	≤ 30.00
		5795	15.76	0.038	≤ 30.00

Test Mode	Data Rate (Mbps)	Frequency (MHz)	Max. Output Power (Average)		
			ANT-0		Limit (dBm)
			dBm	W	
Mode 9	6.5	5180	9.05	0.008	≤ 24.00
		5200	15.32	0.034	≤ 24.00
		5220	15.29	0.034	≤ 24.00
		5240	15.68	0.037	≤ 24.00
		5260	15.92	0.039	≤ 24.00
		5280	16.25	0.042	≤ 24.00
		5300	16.21	0.042	≤ 24.00
		5320	10.35	0.011	≤ 24.00
		5500	9.10	0.008	≤ 24.00
		5520	15.62	0.036	≤ 24.00
		5540	15.61	0.036	≤ 24.00
		5560	15.69	0.037	≤ 24.00
		5580	15.65	0.037	≤ 24.00
		5600	15.45	0.035	≤ 24.00
		5620	15.35	0.034	≤ 24.00
		5640	15.65	0.037	≤ 24.00
		5660	15.66	0.037	≤ 24.00
		5680	15.63	0.037	≤ 24.00
		5700	9.42	0.009	≤ 24.00
		5745	16.25	0.042	≤ 30.00
		5765	16.18	0.041	≤ 30.00
		5785	16.22	0.042	≤ 30.00
		5805	16.20	0.042	≤ 30.00
		5825	16.02	0.040	≤ 30.00
Mode 10	13.5	5190	8.41	0.007	≤ 24.00
		5230	16.31	0.043	≤ 24.00
		5270	17.08	0.051	≤ 24.00
		5310	9.50	0.009	≤ 24.00
		5510	8.03	0.006	≤ 24.00
		5550	15.62	0.036	≤ 24.00
		5590	15.59	0.036	≤ 24.00
		5630	14.99	0.032	≤ 24.00
		5670	7.82	0.006	≤ 24.00
		5755	15.98	0.040	≤ 30.00
		5795	15.90	0.039	≤ 30.00
Mode 11	29.3	5210	6.42	0.004	≤ 24.00
		5290	7.17	0.005	≤ 24.00
		5530	6.89	0.005	≤ 24.00
		5610	6.61	0.005	≤ 24.00
		5775	16.21	0.042	≤ 30.00

Maximum Power Spectral Density




ANT-0




Test Mode	Frequency (MHz)	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
Mode 6	5180	-2.886	0.031	-2.855	11.00
	5200	3.528	0.031	3.559	11.00
	5240	3.857	0.031	3.888	11.00
	5260	4.267	0.031	4.298	11.00
	5280	4.552	0.031	4.583	11.00
	5320	-1.599	0.031	-1.568	11.00
	5500	-2.613	0.031	-2.582	11.00
	5560	4.033	0.031	4.064	11.00
	5700	-2.337	0.031	-2.306	11.00
Mode 9	5180	-3.059	0.034	-3.025	11.00
	5200	3.342	0.034	3.376	11.00
	5240	3.732	0.034	3.766	11.00
	5260	4.027	0.034	4.061	11.00
	5280	4.347	0.034	4.381	11.00
	5320	-1.758	0.034	-1.724	11.00
	5500	-3.029	0.034	-2.995	11.00
	5560	3.868	0.034	3.902	11.00
	5700	-2.552	0.034	-2.518	11.00
Mode 10	5190	-6.575	0.102	-6.473	11.00
	5230	1.548	0.102	1.650	11.00
	5270	2.362	0.102	2.464	11.00
	5310	-5.564	0.102	-5.462	11.00
	5510	-7.037	0.102	-6.935	11.00
	5550	1.013	0.102	1.115	11.00
	5670	-7.052	0.102	-6.950	11.00
Mode 11	5210	-11.546	0.237	-11.309	11.00
	5290	-10.957	0.237	-10.720	11.00
	5530	-11.248	0.237	-11.011	11.00
	5610	-11.519	0.237	-11.282	11.00




Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.




Test Mode	Frequency (MHz)	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
Mode 6	5745	-4.150	0.031	2.871	30.00
	5785	-4.199	0.031	2.822	30.00
	5825	-4.318	0.031	2.703	30.00
Mode 9	5745	-4.364	0.034	2.659	30.00
	5785	-4.419	0.034	2.604	30.00
	5825	-4.671	0.034	2.352	30.00
Mode 10	5755	-7.617	0.102	-0.526	30.00
	5795	-7.604	0.102	-0.513	30.00
Mode 11	5775	-10.277	0.237	-3.050	30.00




Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.
Conversion ration = 10*Log(500 k/100 k)

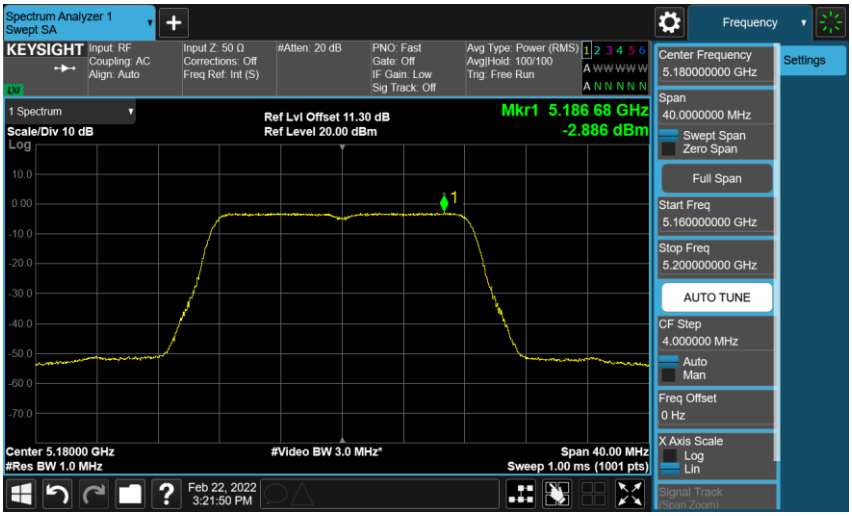
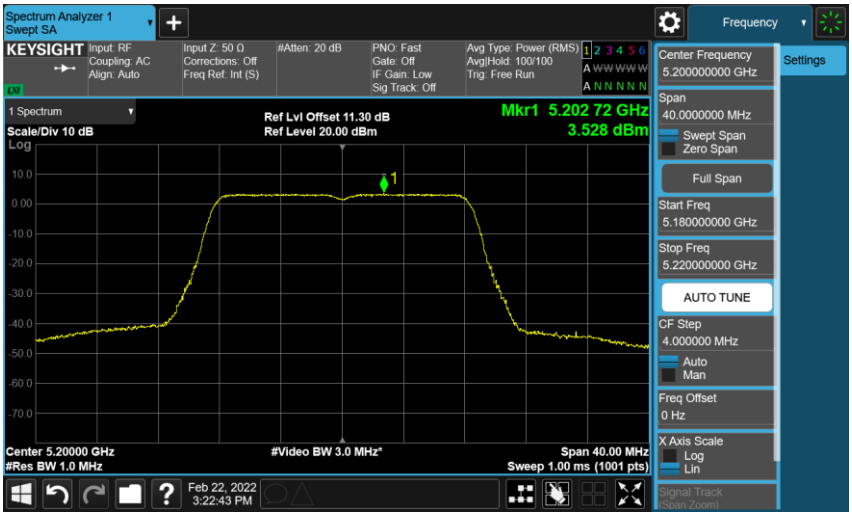
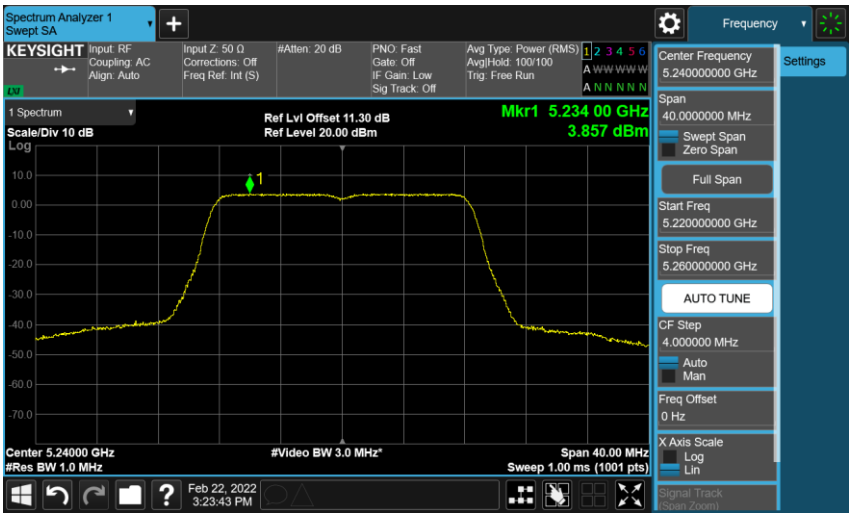
Mode 6: IEEE 802.11a Continuous TX Mode_ANT-0	
5180 MHz	
5200 MHz	
5240 MHz	

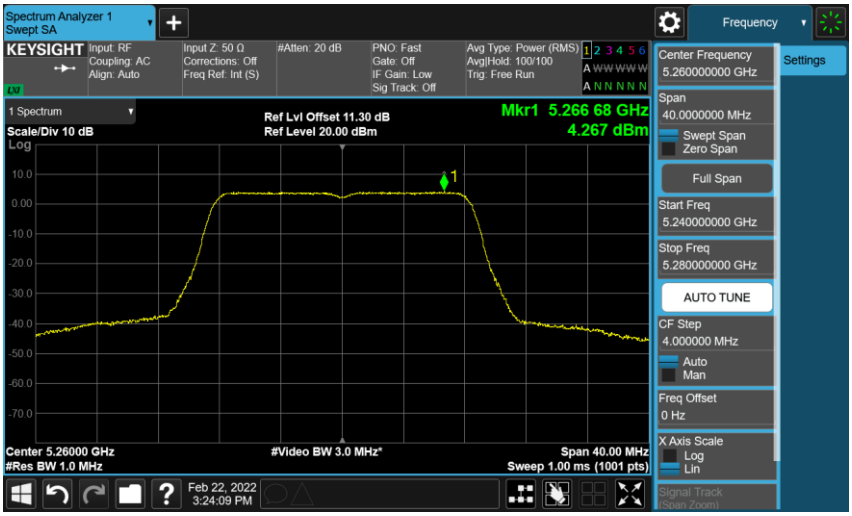
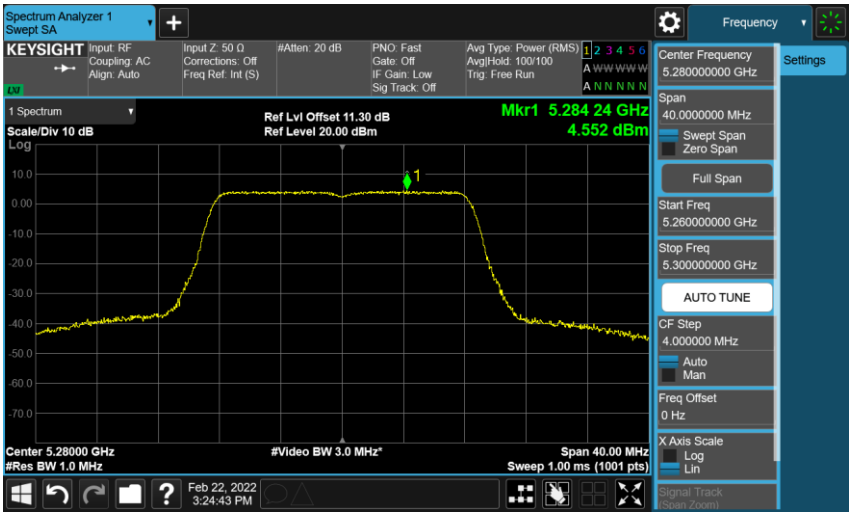
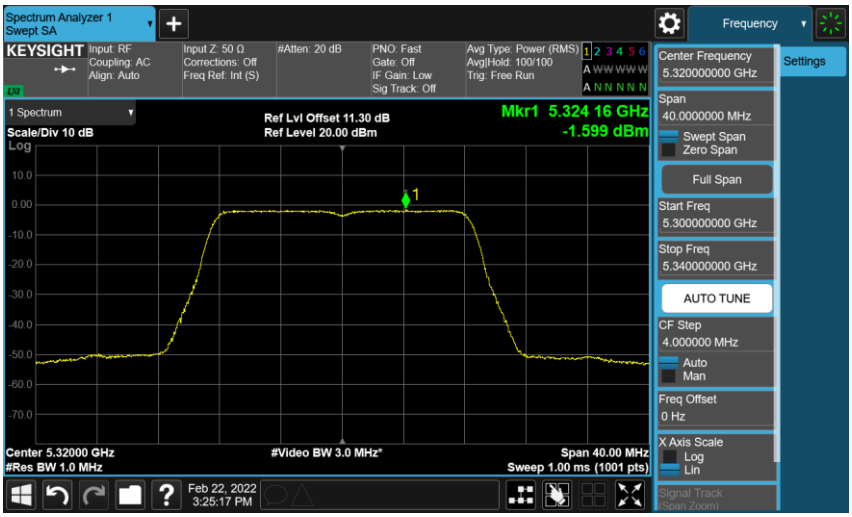
Mode 6: IEEE 802.11a Continuous TX Mode_ANT-0	
5260 MHz	
5280 MHz	
5320 MHz	

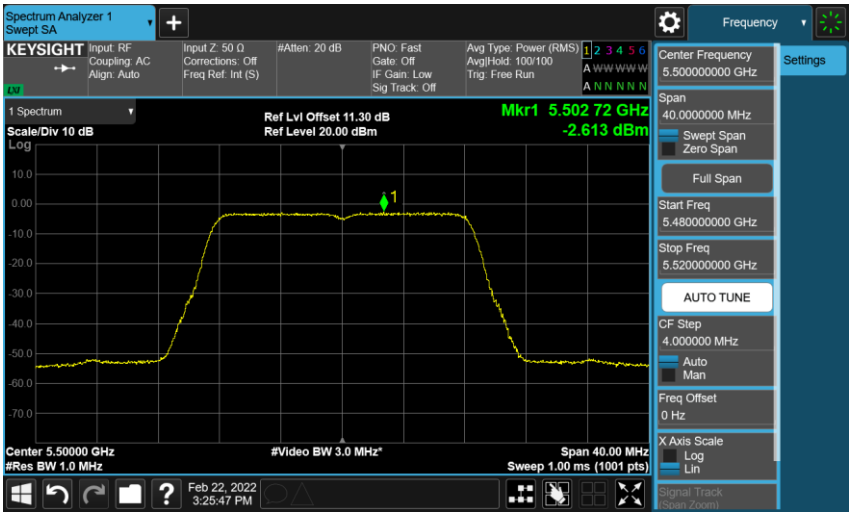
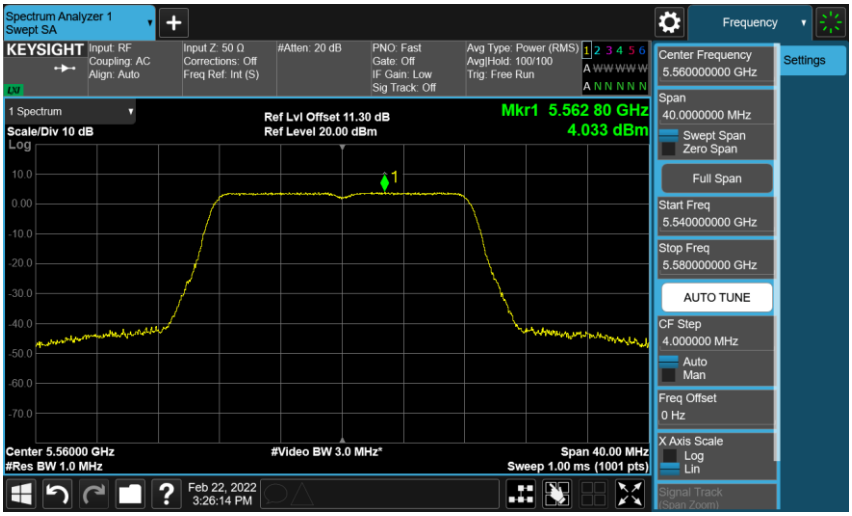
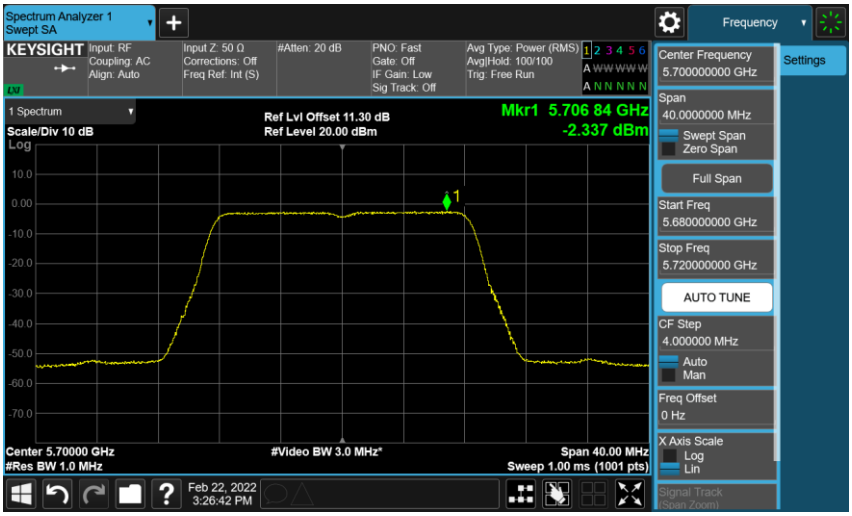
Mode 6: IEEE 802.11a Continuous TX Mode_ANT-0	
5500 MHz	
5560 MHz	
5700 MHz	

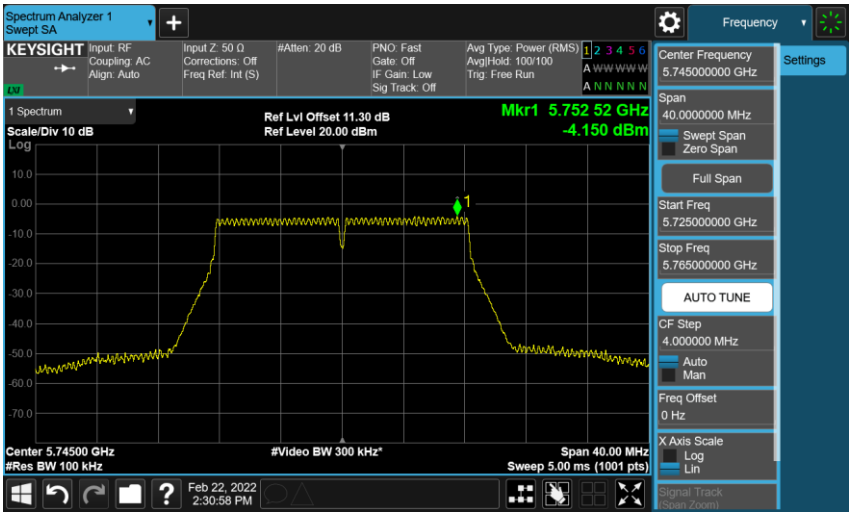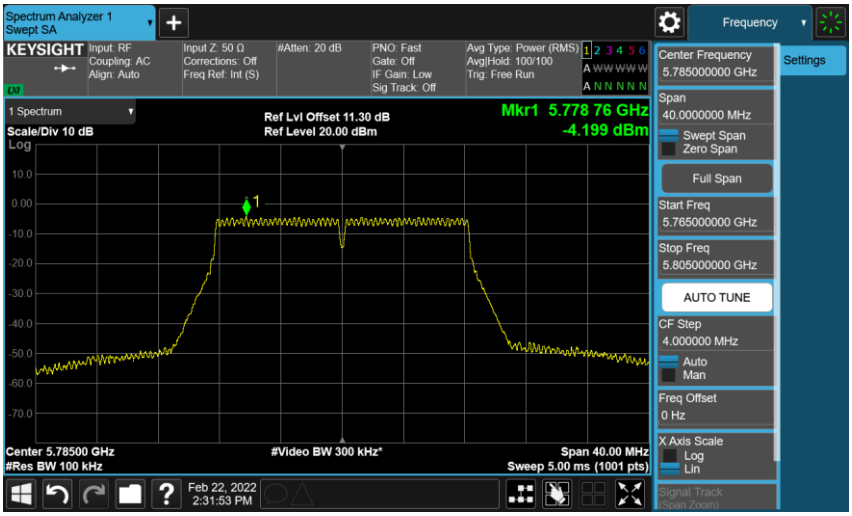
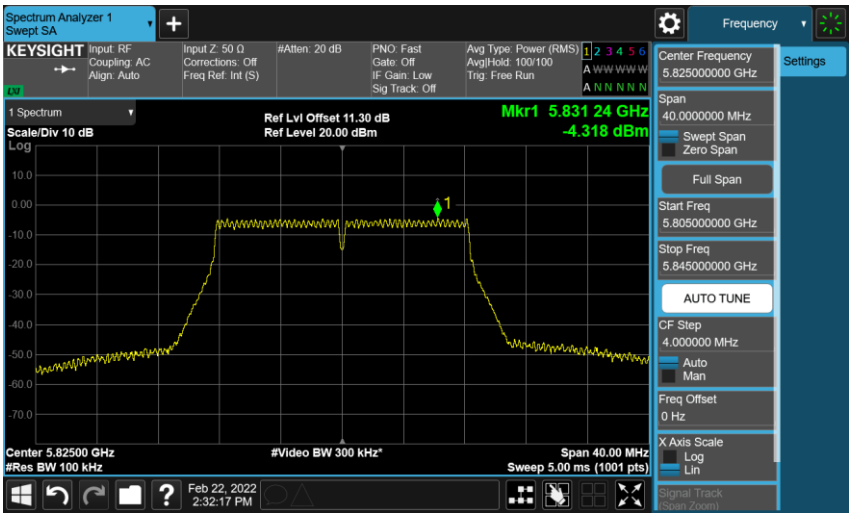
Mode 6: IEEE 802.11a Continuous TX Mode_ANT-0	
5745 MHz	
5785 MHz	
5825 MHz	

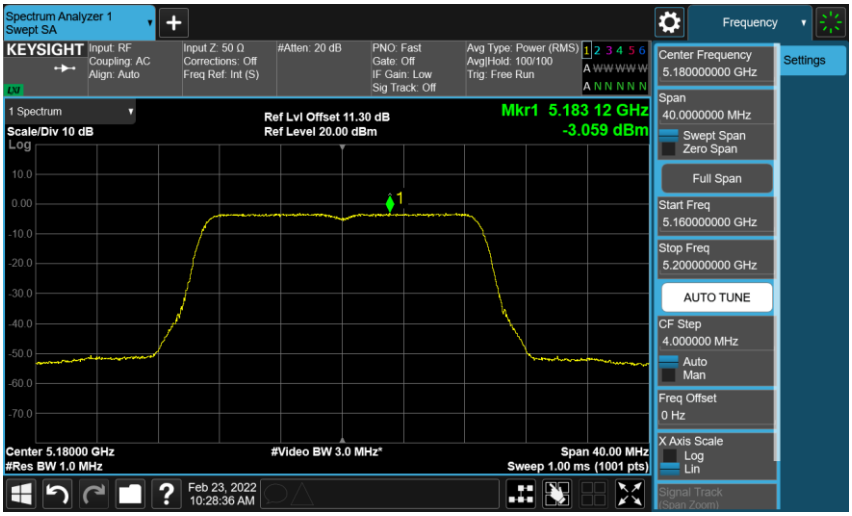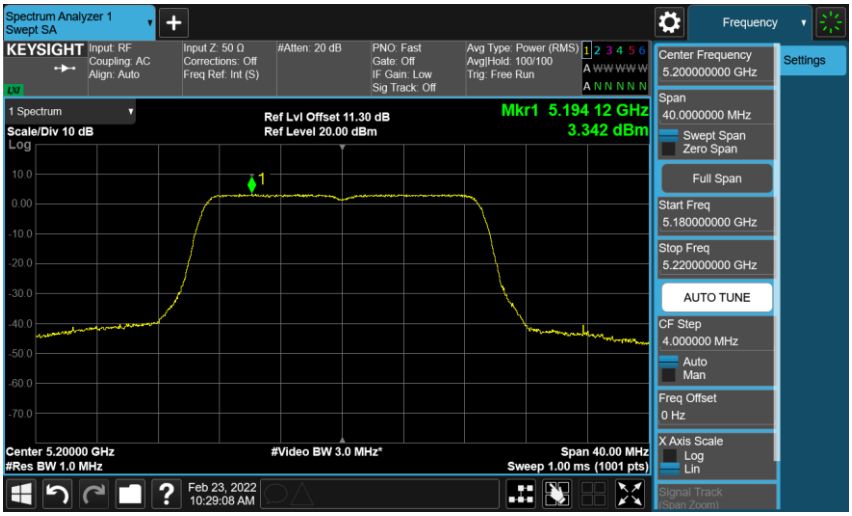
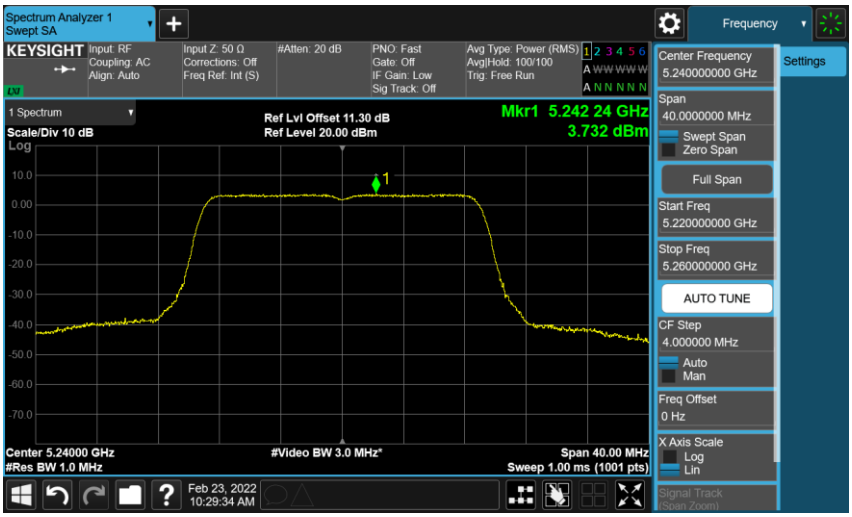
Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0	
5180 MHz	
5200 MHz	
5240 MHz	

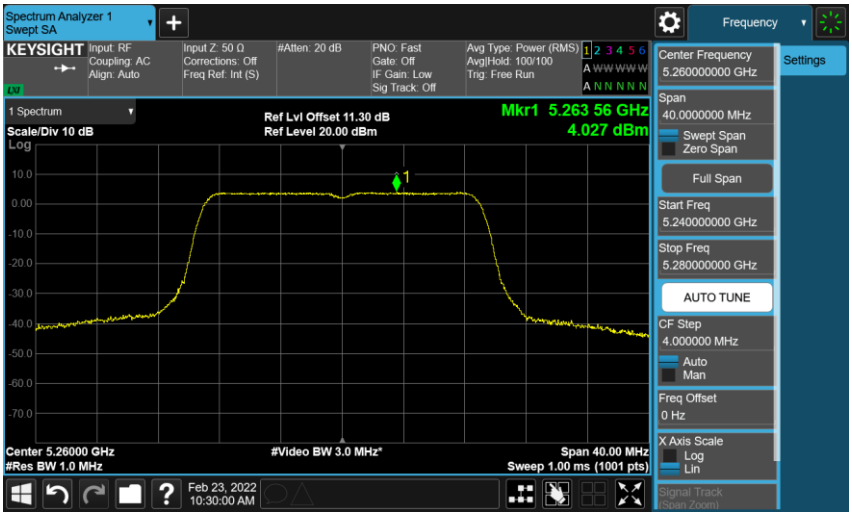
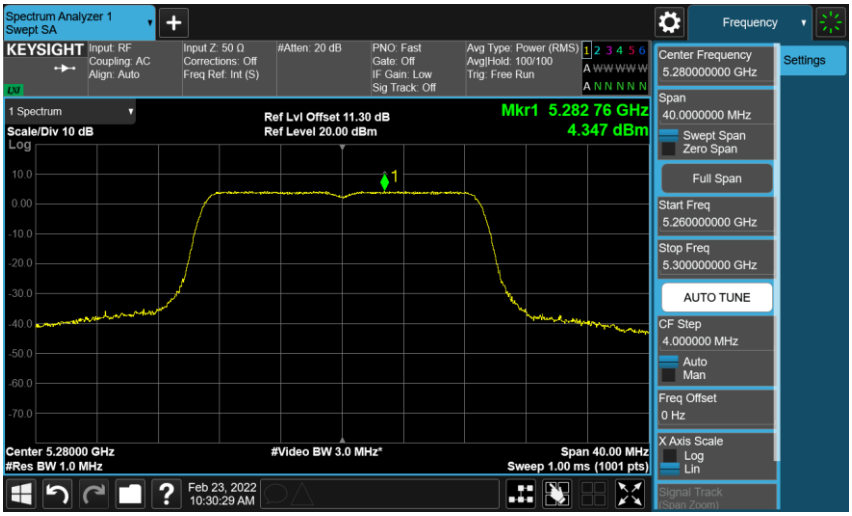
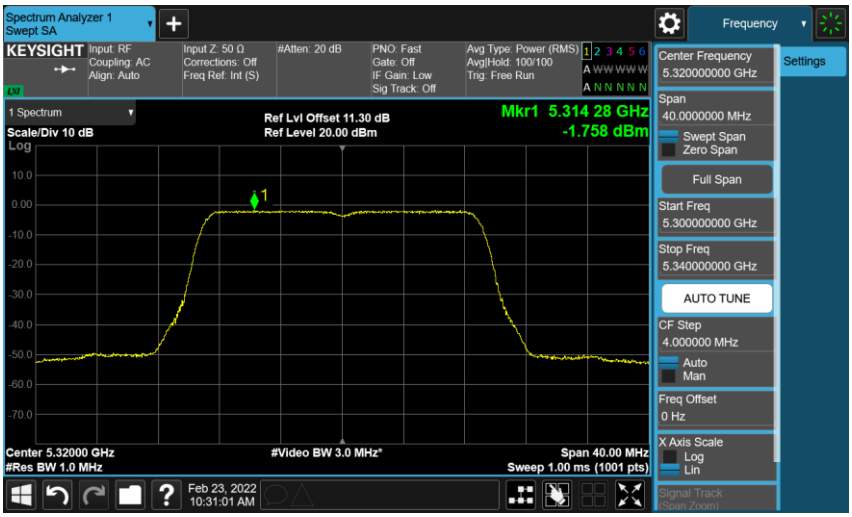
Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0	
5260 MHz	
5280 MHz	
5320 MHz	

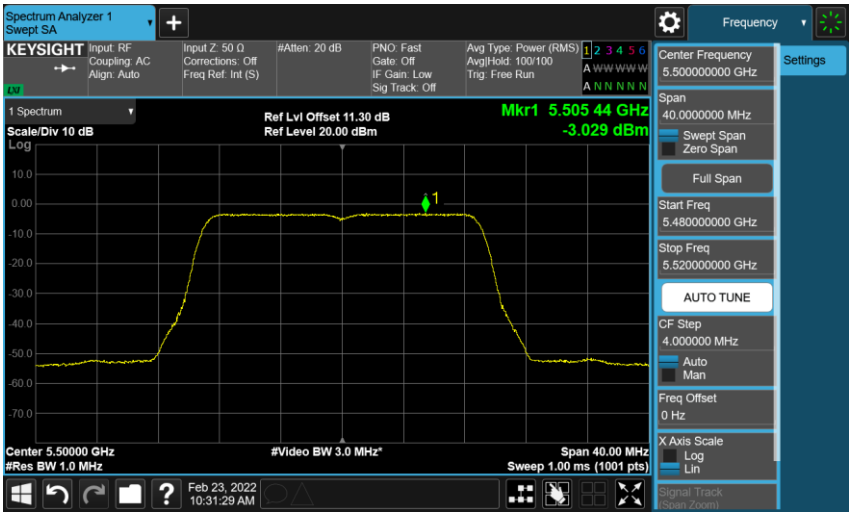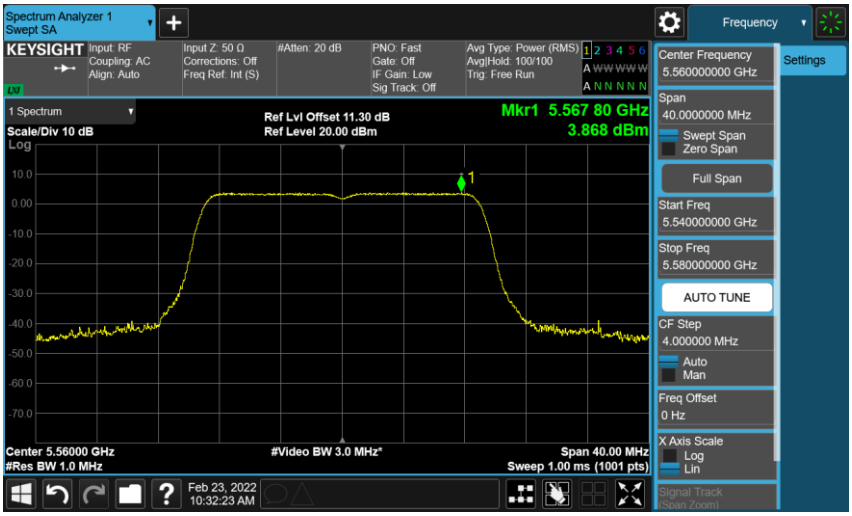
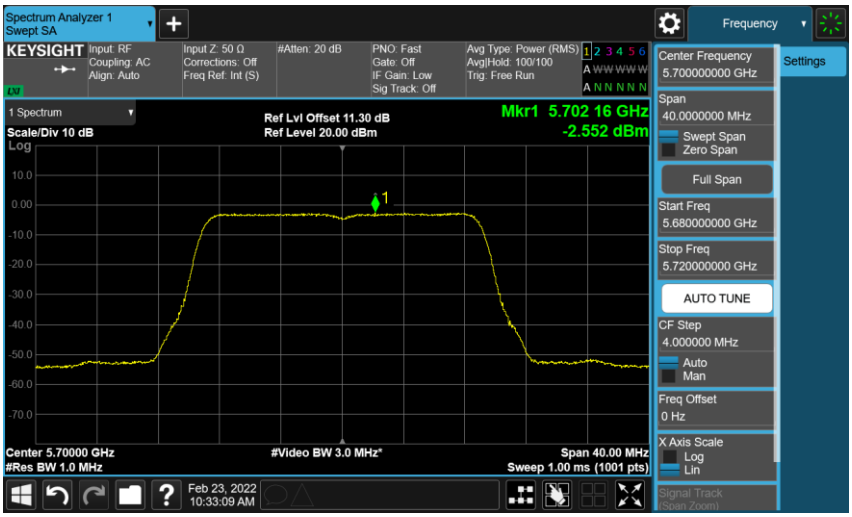
Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0	
5500 MHz	
5560 MHz	
5700 MHz	

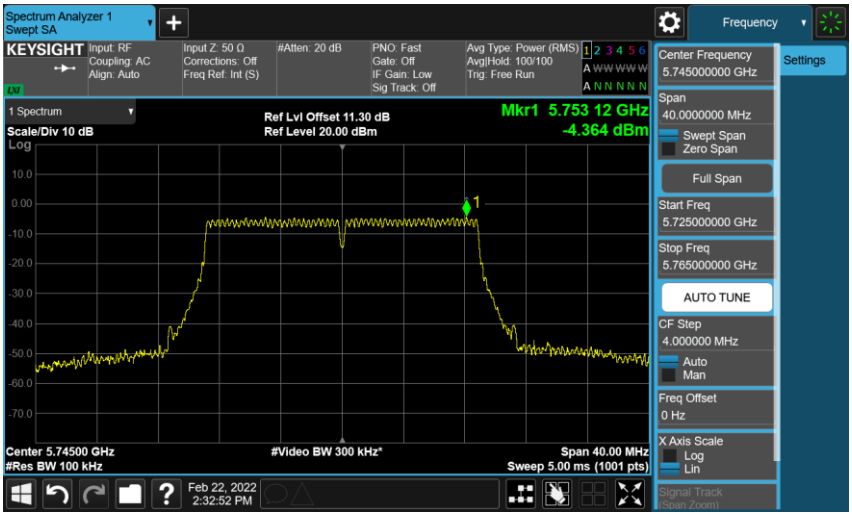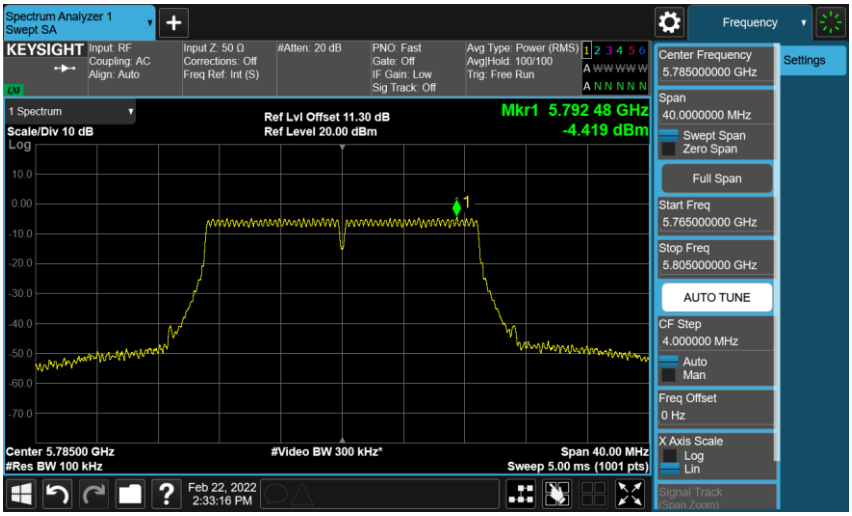
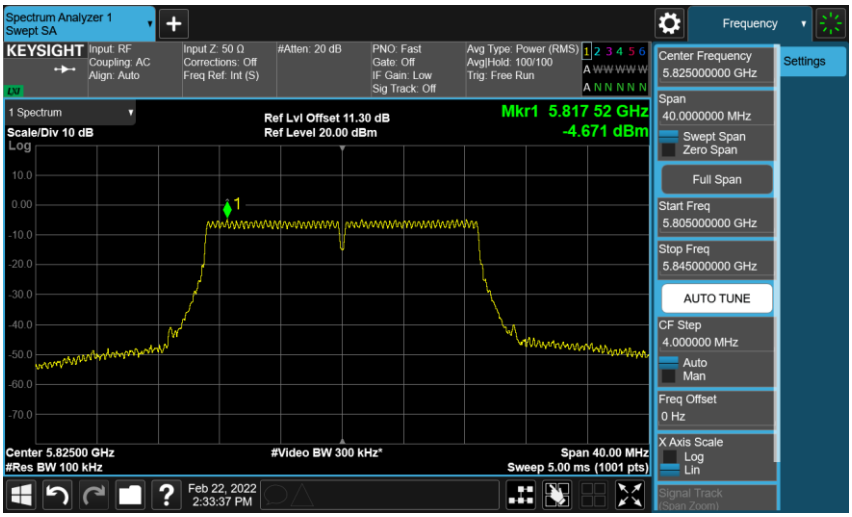
Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0	
5745 MHz	
5785 MHz	
5825 MHz	


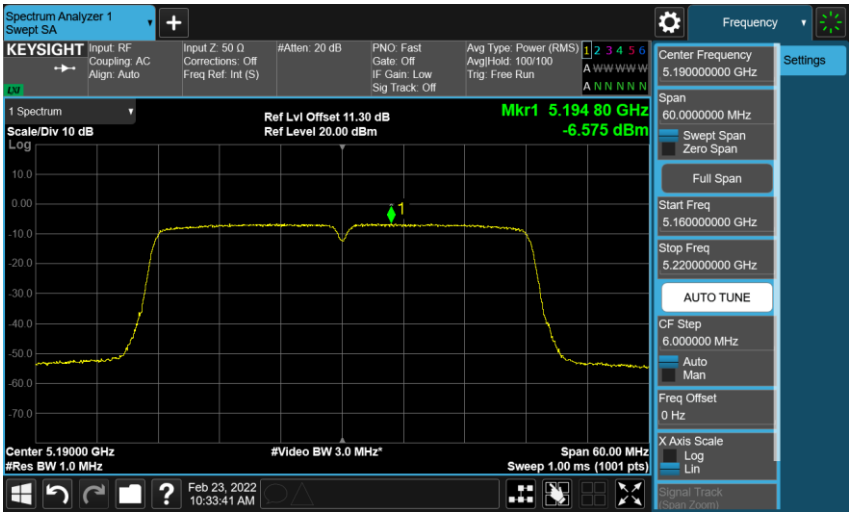
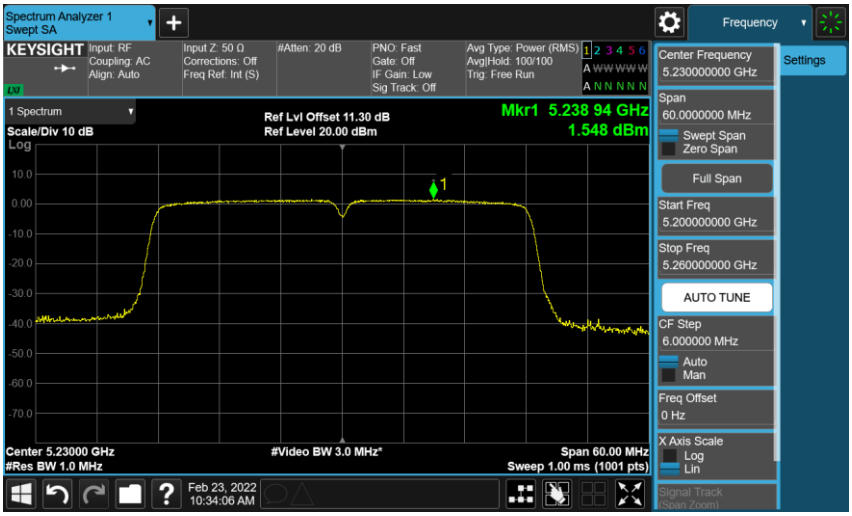
Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0	
5190 MHz	
5230 MHz	

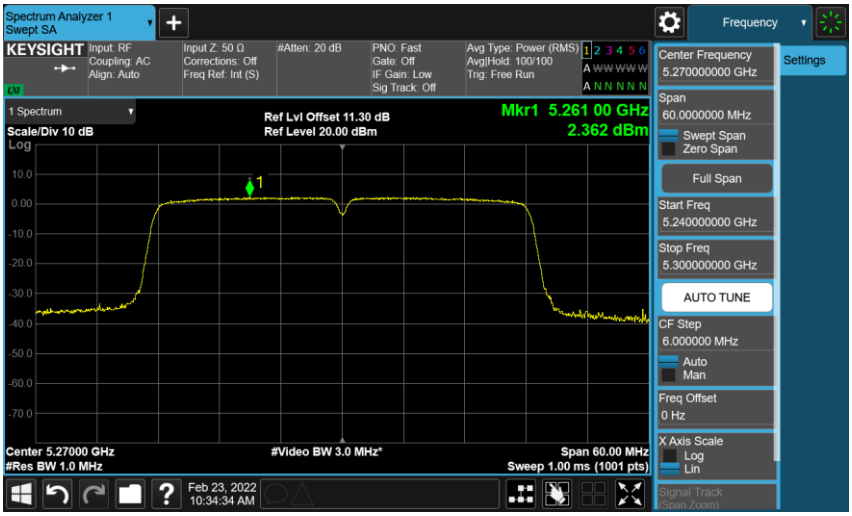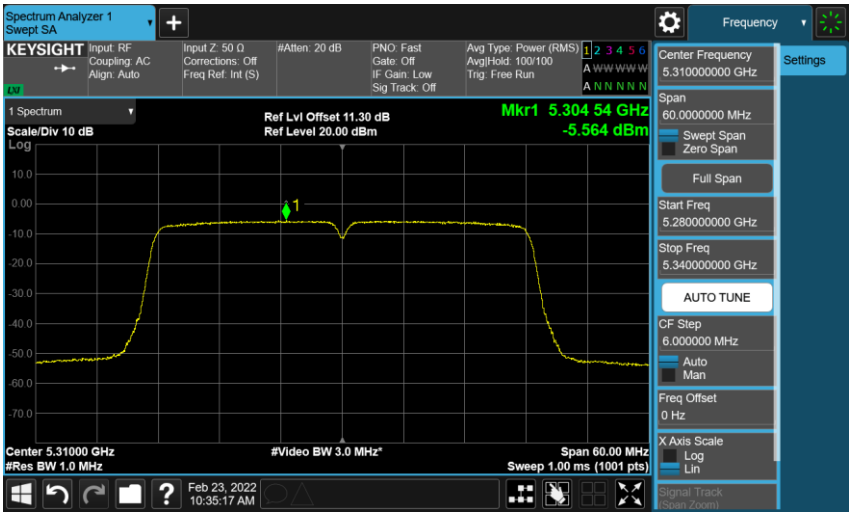Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0	
5270 MHz	
5310 MHz	

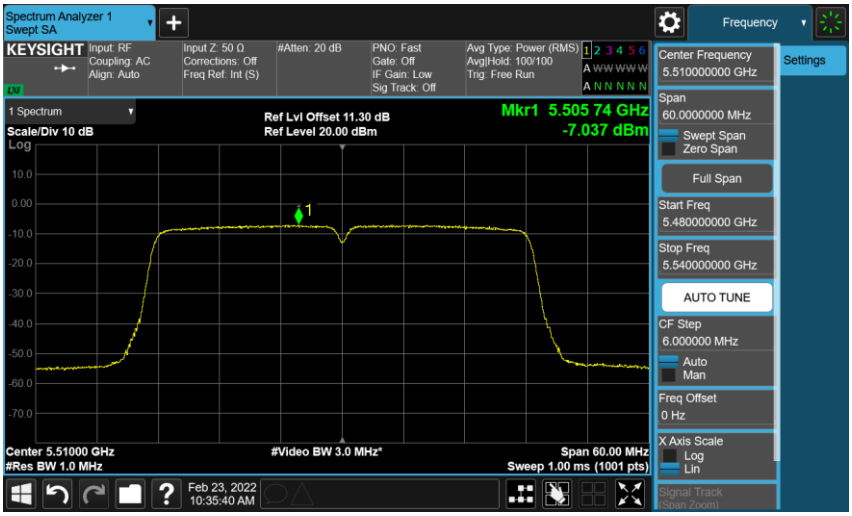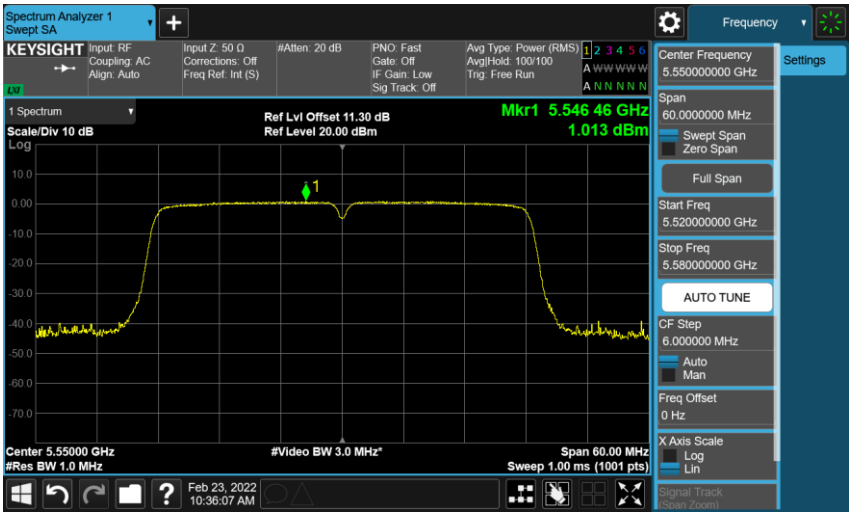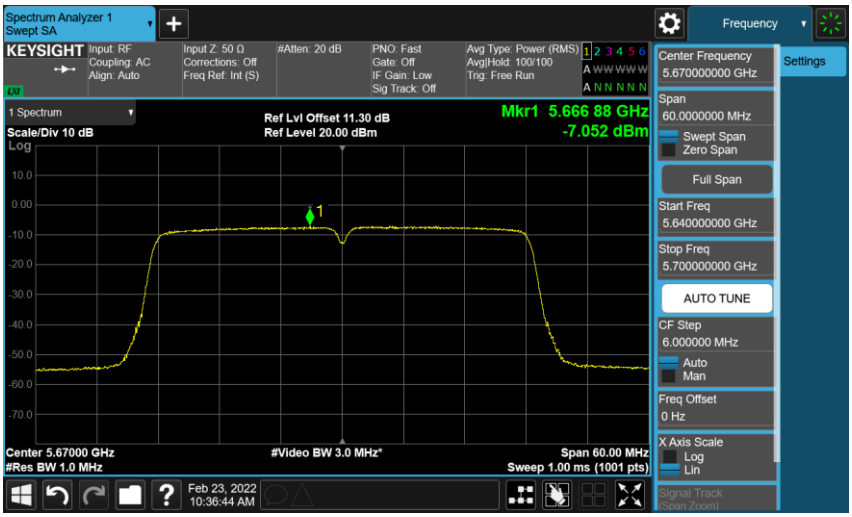Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0	
5510 MHz	
5550 MHz	
5670 MHz	

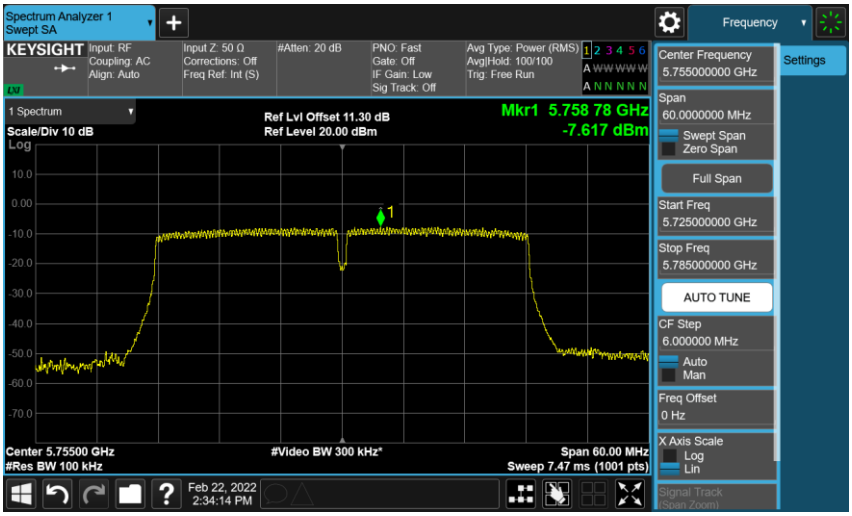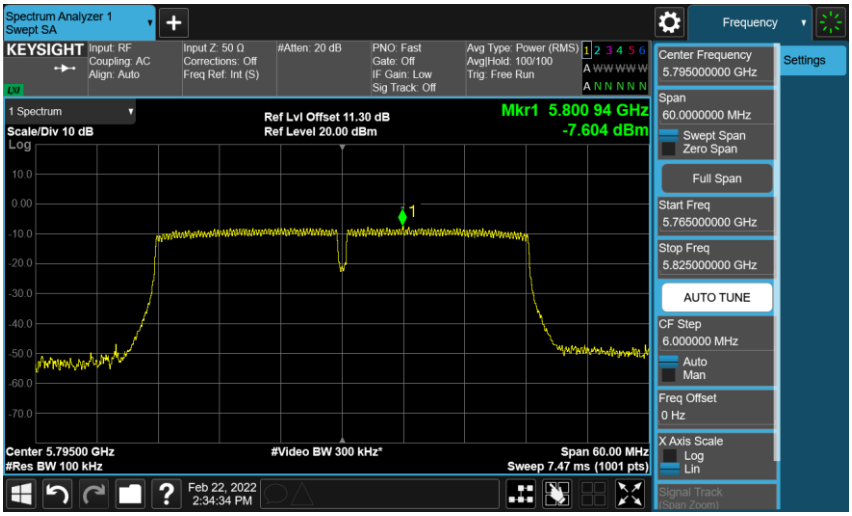
Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0	
5755 MHz	
5795 MHz	


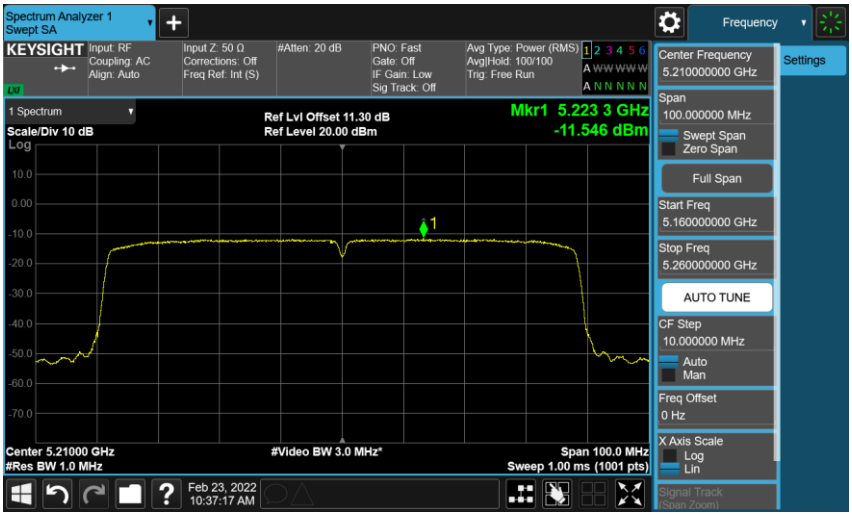
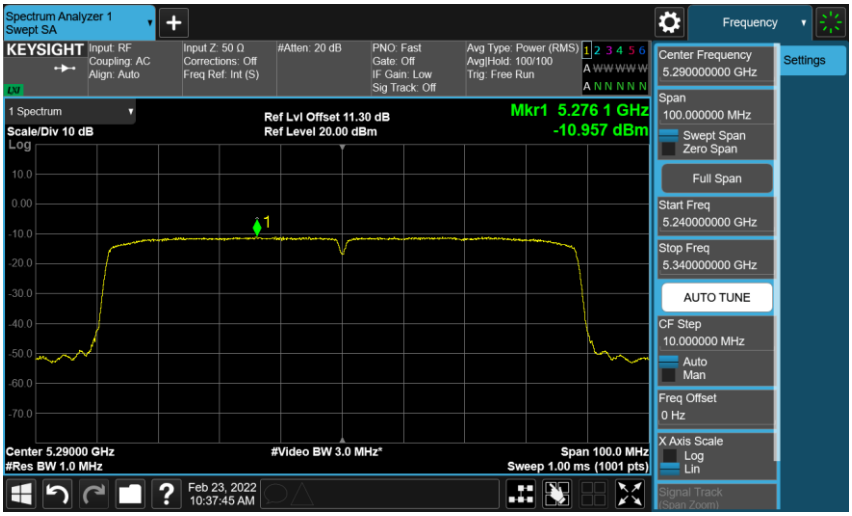
Mode 11: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-0	
5210 MHz	
5290 MHz	

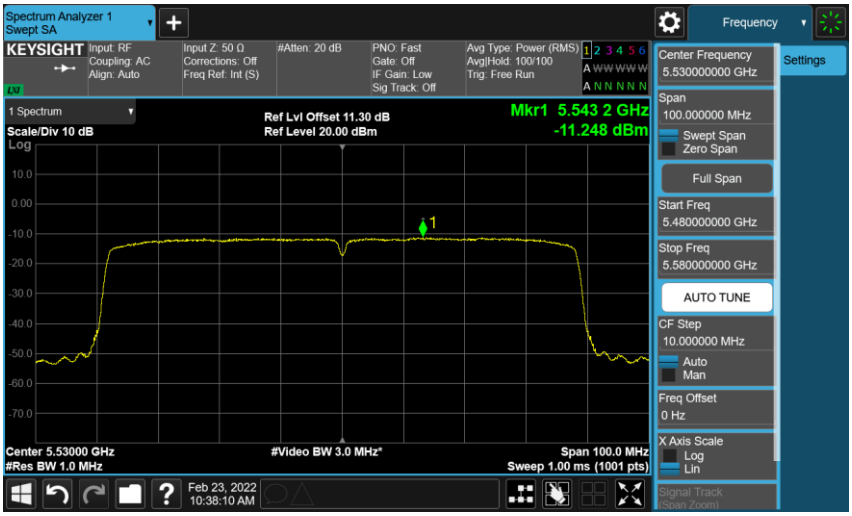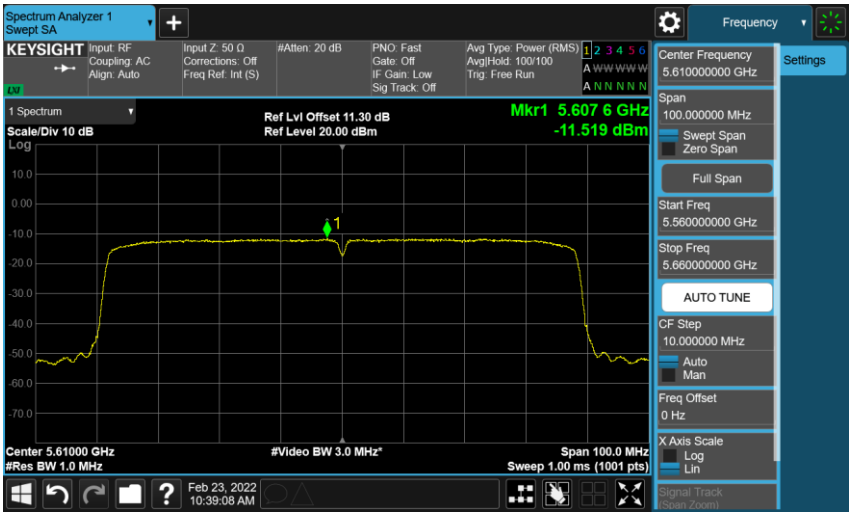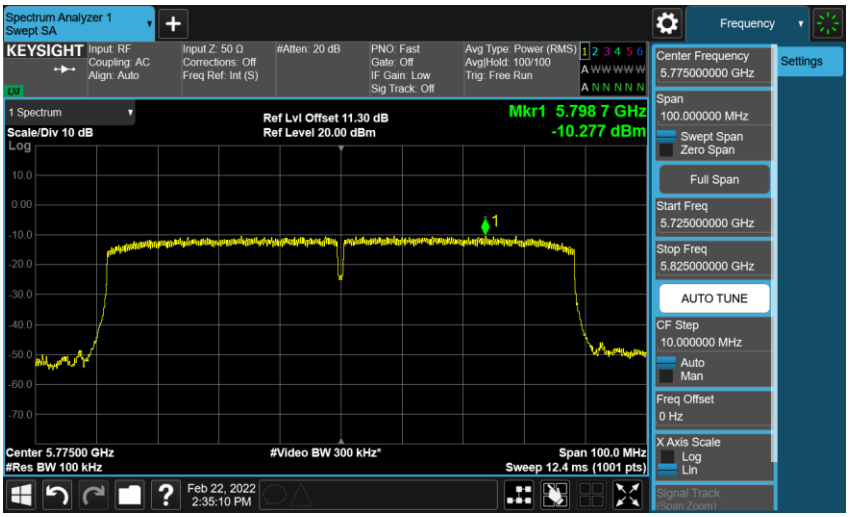
Mode 11: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-0	
5530 MHz	
5610 MHz	
5775 MHz	



26 dB Bandwidth

Test Mode	Frequency (MHz)	Measurement (MHz)
		ANT-0
Mode 6	5180	19.720
	5200	19.540
	5240	19.580
	5260	19.670
	5280	19.820
	5320	19.620
	5500	19.590
	5560	19.670
	5700	19.660
Mode 7	5260	20.440
	5280	20.060
	5320	20.280
	5500	20.220
	5560	20.180
	5700	20.310
Mode 8	5270	42.130
	5310	40.050
	5510	39.410
	5550	39.360
	5670	39.790
Mode 9	5180	20.200
	5200	20.260
	5240	20.460
	5260	20.280
	5280	20.370
	5320	20.440
	5500	20.220
	5560	20.140
	5700	20.170
Mode 10	5190	39.460
	5230	39.560
	5270	43.650
	5310	39.550
	5510	39.540
	5550	42.280
	5670	39.530
Mode 11	5210	80.650
	5290	80.290
	5530	80.630
	5610	81.140


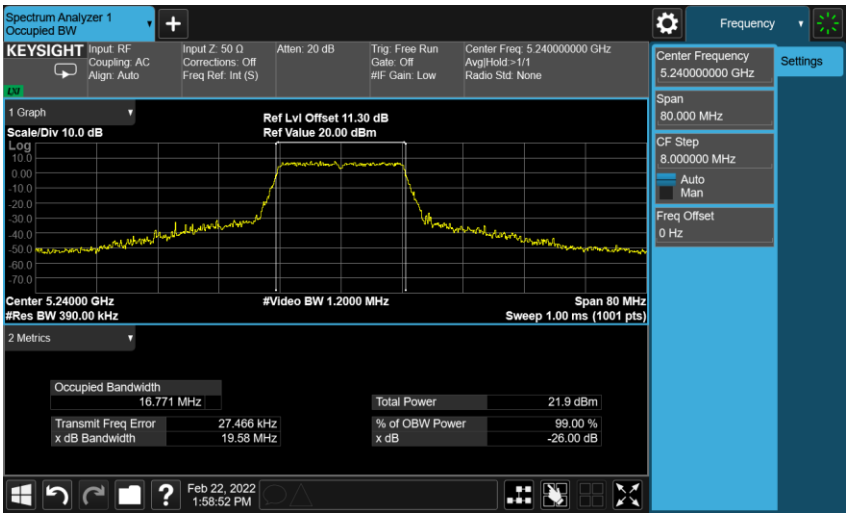
Mode 6: IEEE 802.11a Continuous TX Mode_ANT-0	
5180 MHz	
5200 MHz	
5240 MHz	

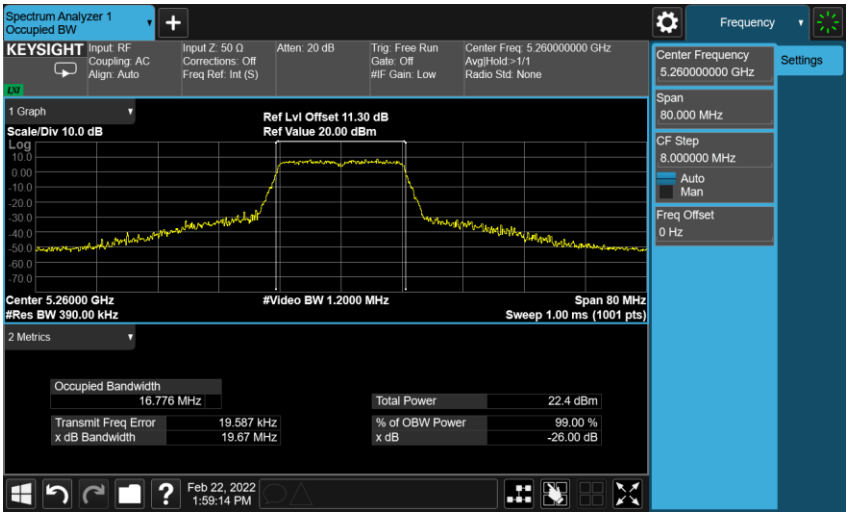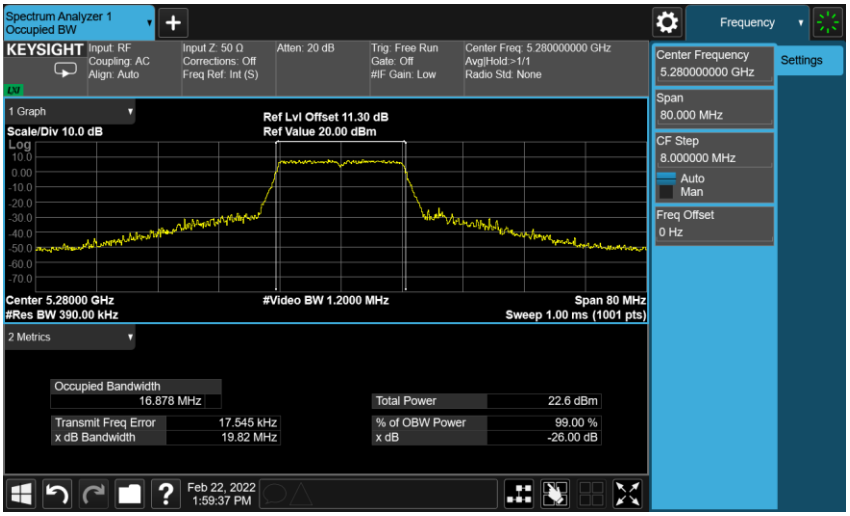
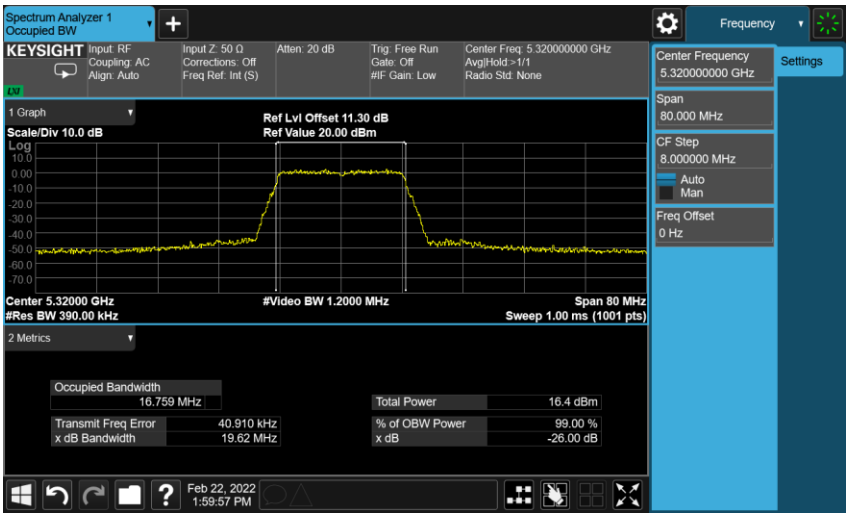
Mode 6: IEEE 802.11a Continuous TX Mode_ANT-0	
5260 MHz	
5280 MHz	
5320 MHz	

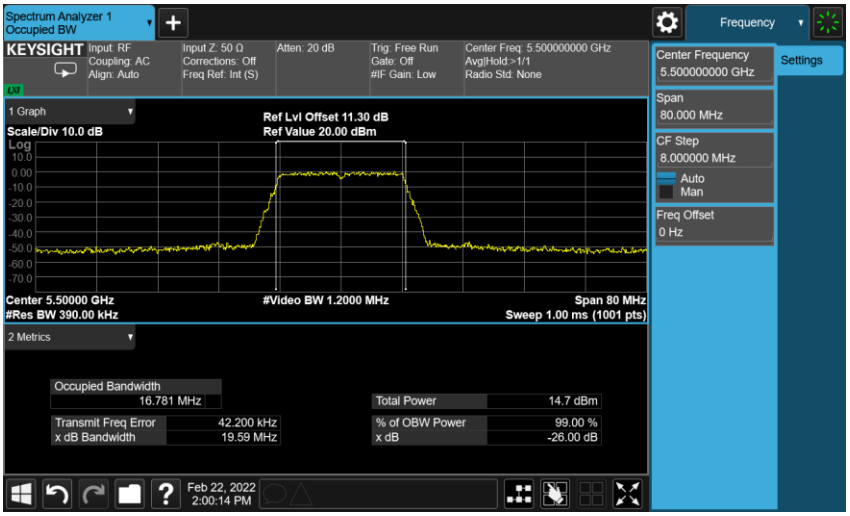
Mode 6: IEEE 802.11a Continuous TX Mode_ANT-0	
5500 MHz	
5560 MHz	
5700 MHz	

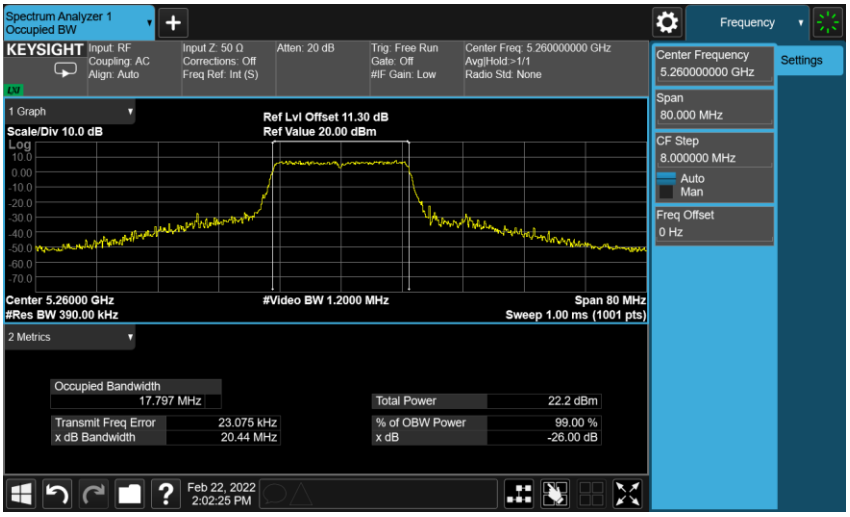
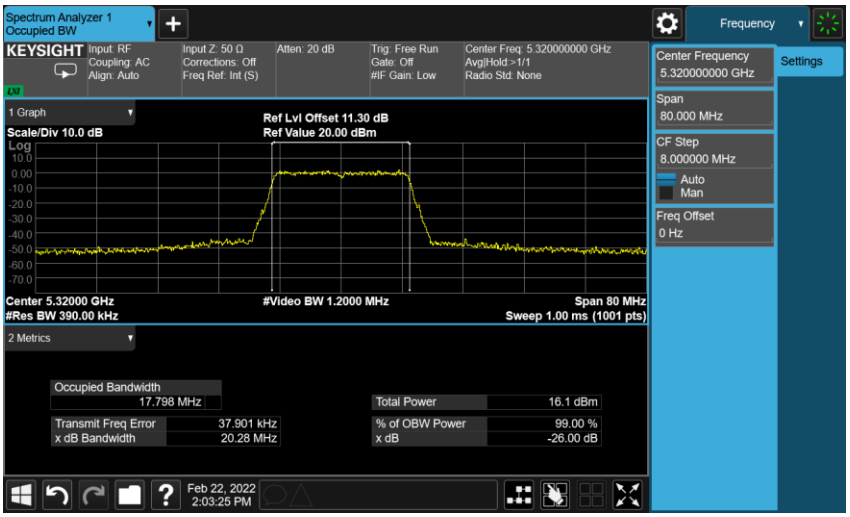
Mode 7: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-0	
5260 MHz	
5280 MHz	
5320 MHz	



Mode 7: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-0	
5500 MHz	
5560 MHz	
5700 MHz	

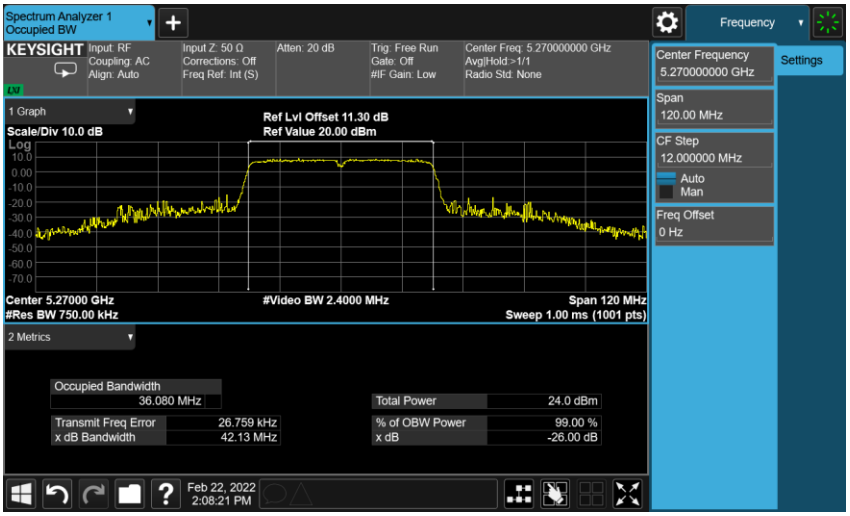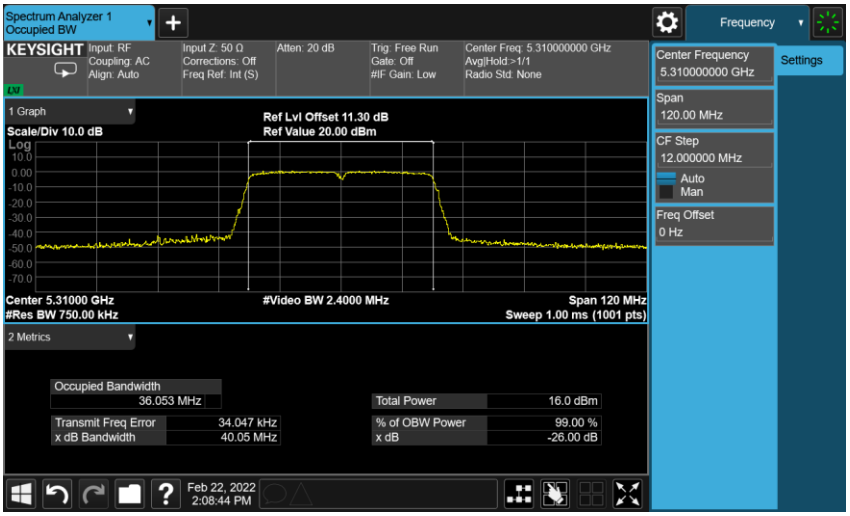
Mode 8: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-0	
5270 MHz	
5310 MHz	

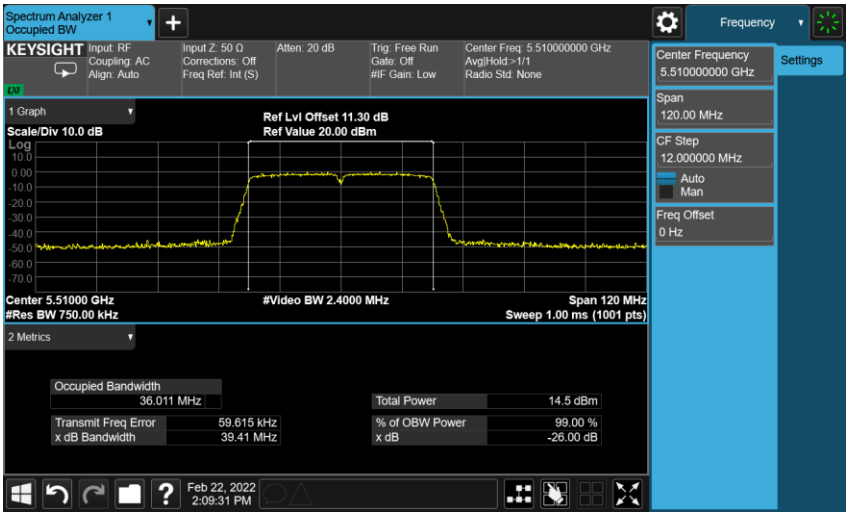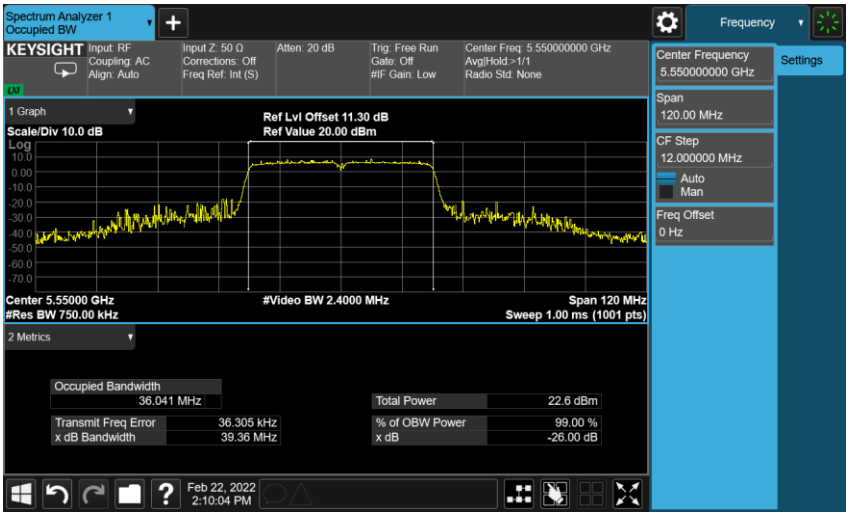Mode 8: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-0	
5510 MHz	
5550 MHz	
5670 MHz	


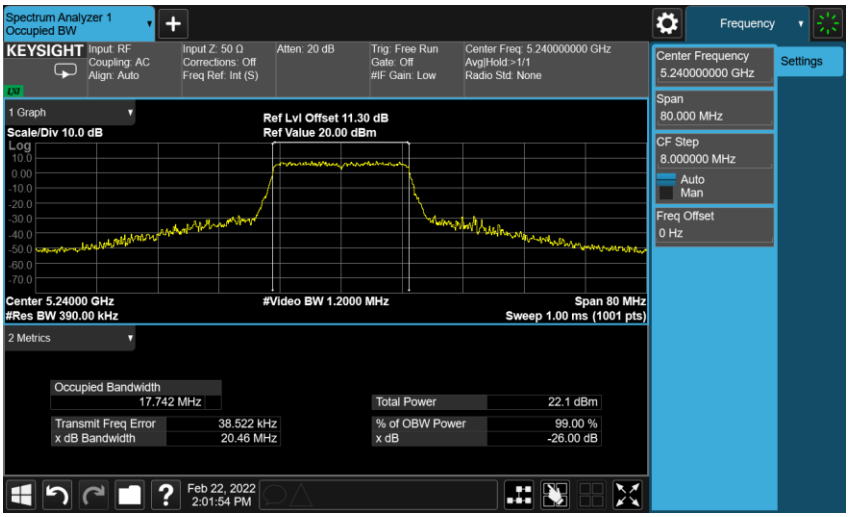
Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0	
5180 MHz	
5200 MHz	
5240 MHz	

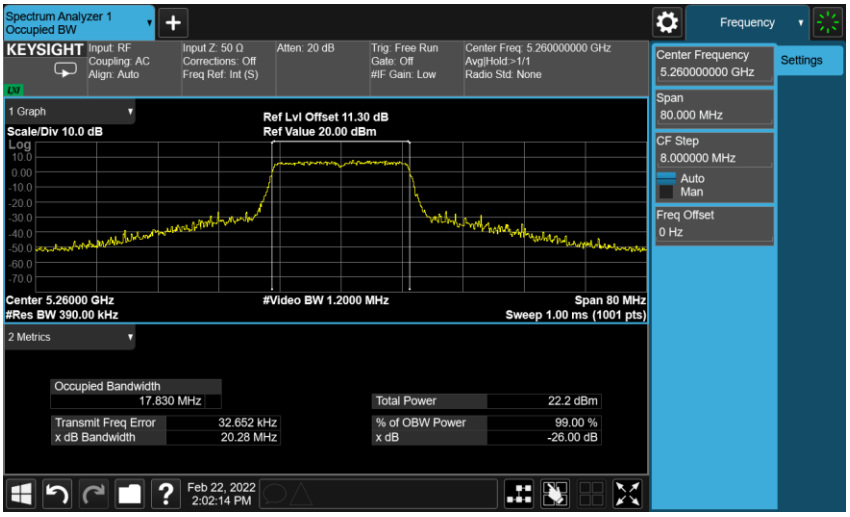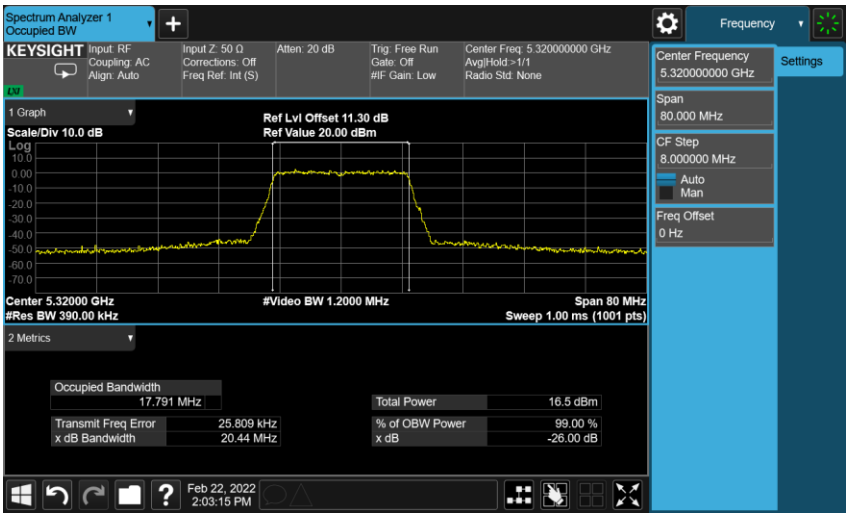
Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0	
5260 MHz	
5280 MHz	
5320 MHz	

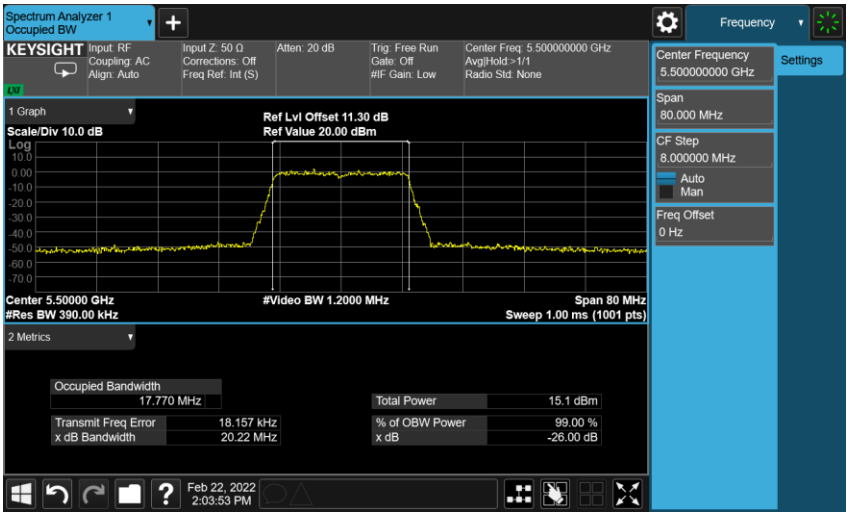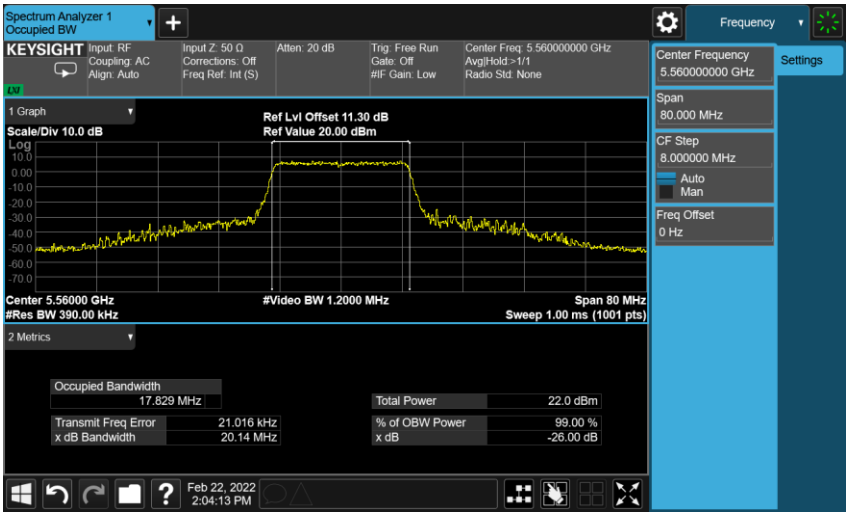Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0	
5500 MHz	
5560 MHz	
5700 MHz	

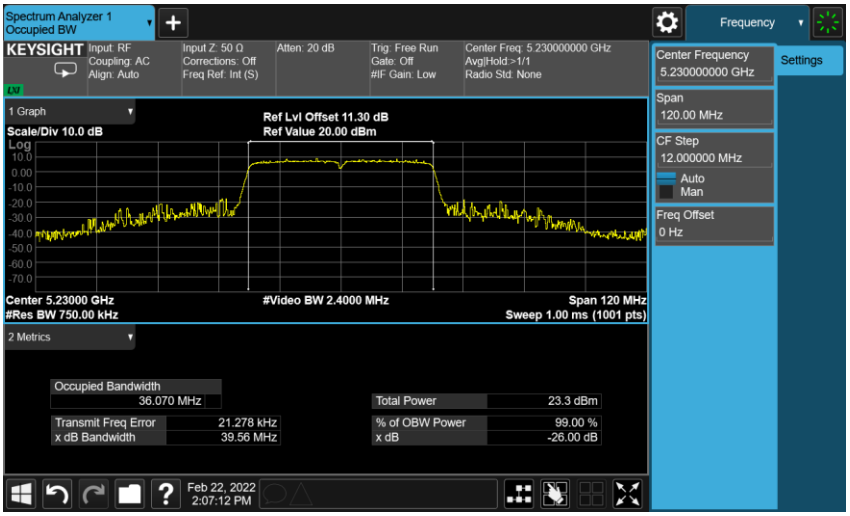Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0	
5190 MHz	
5230 MHz	

Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0	
5270 MHz	
5310 MHz	

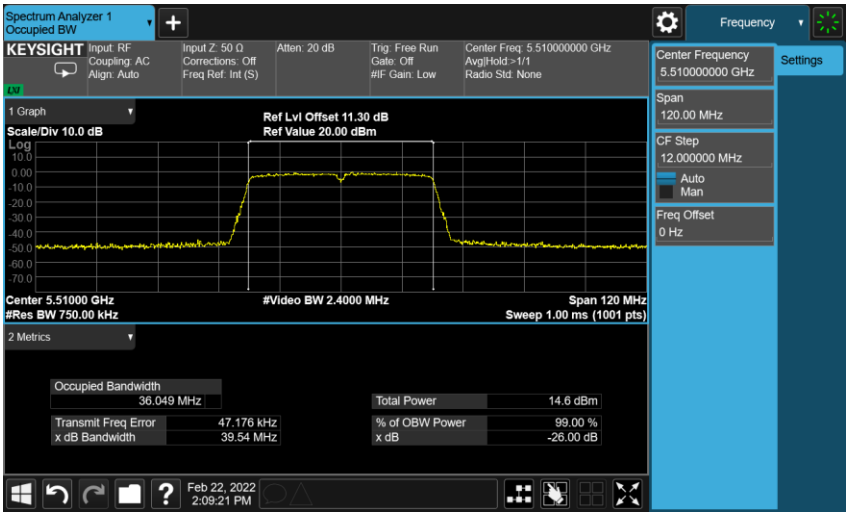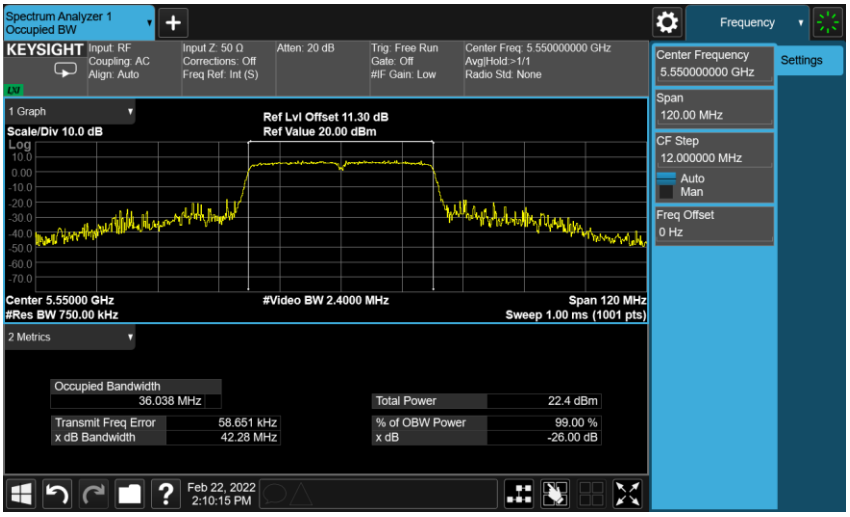Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0	
5510 MHz	
5550 MHz	
5670 MHz	



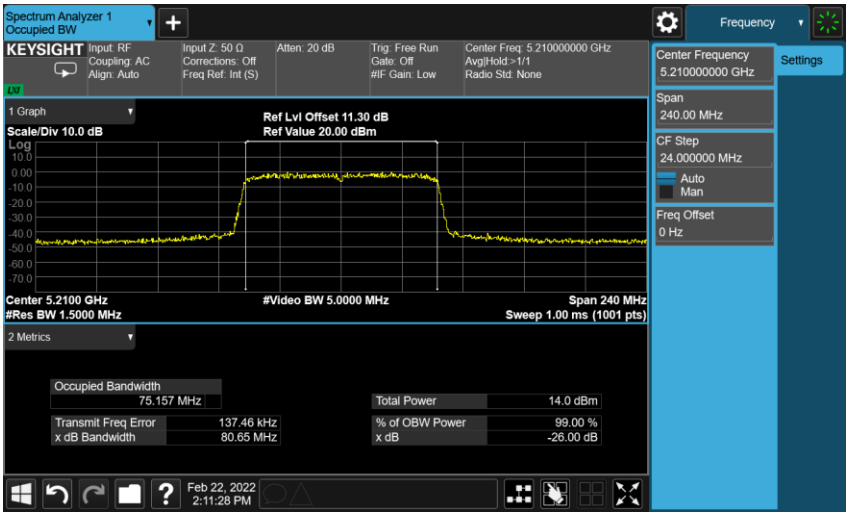
Mode 11: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-0	
5210 MHz	
5290 MHz	



Mode 11: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-0	
5530 MHz	
5610 MHz	



測試結果:


6 dB Bandwidth

Test Mode	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
		ANT-0	
Mode 6	5745	16400	≥ 500
	5785	16460	≥ 500
	5825	16450	≥ 500
Mode 9	5745	17650	≥ 500
	5785	17670	≥ 500
	5825	17680	≥ 500
Mode 10	5755	35350	≥ 500
	5795	35270	≥ 500
Mode 11	5775	75360	≥ 500

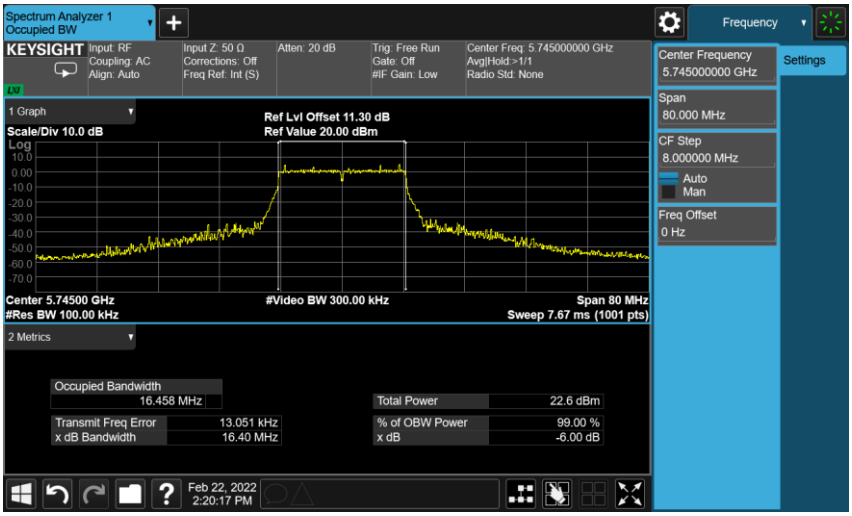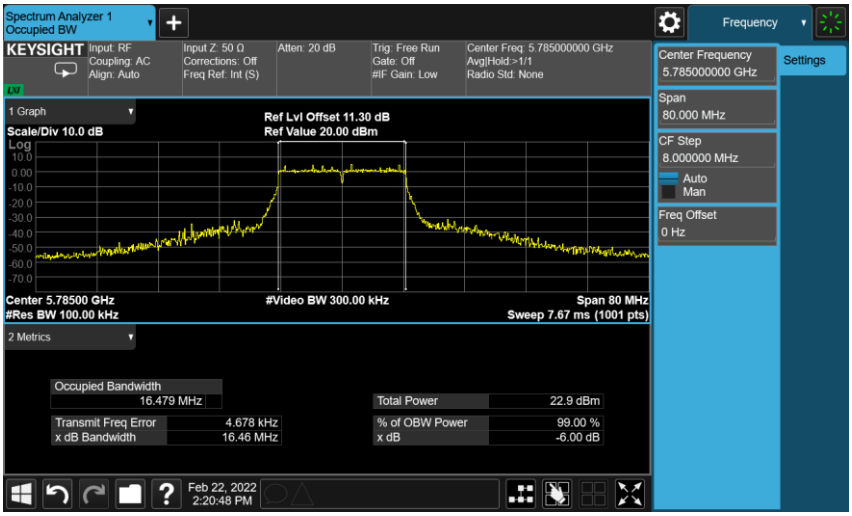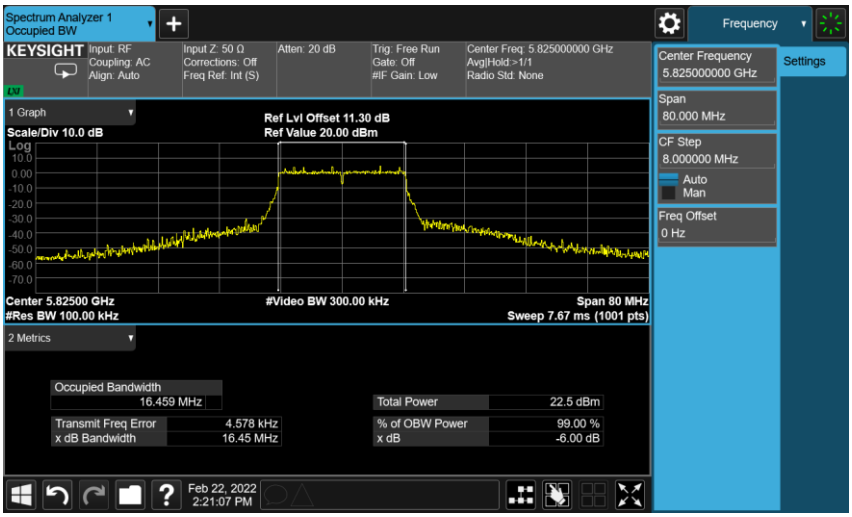Mode 6: IEEE 802.11a Continuous TX Mode_ANT-0	
5745 MHz	
5785 MHz	
5825 MHz	

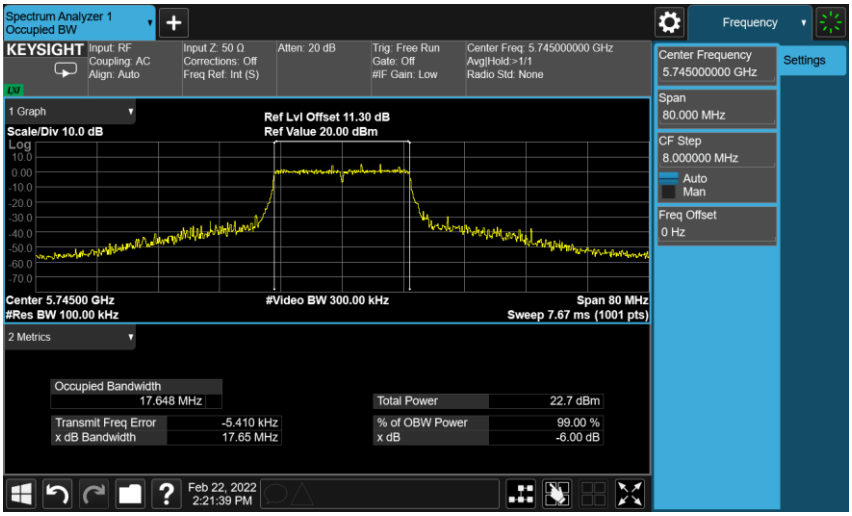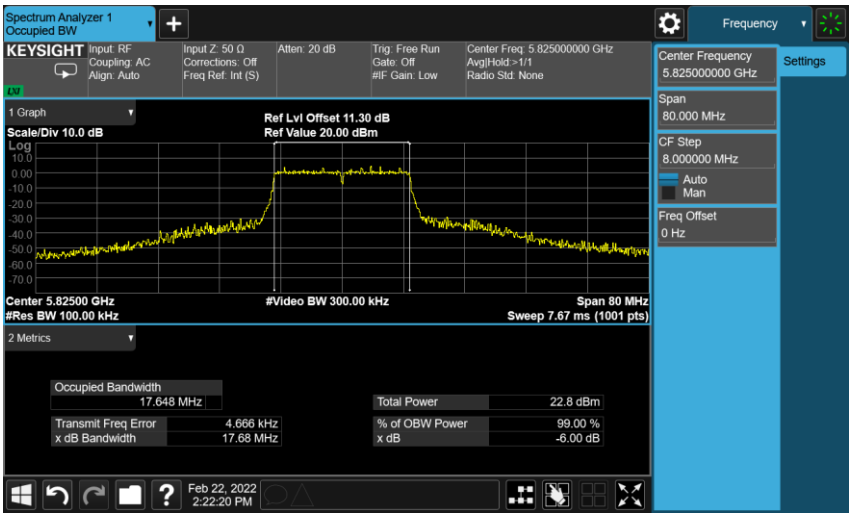Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0	
5745 MHz	
5785 MHz	
5825 MHz	

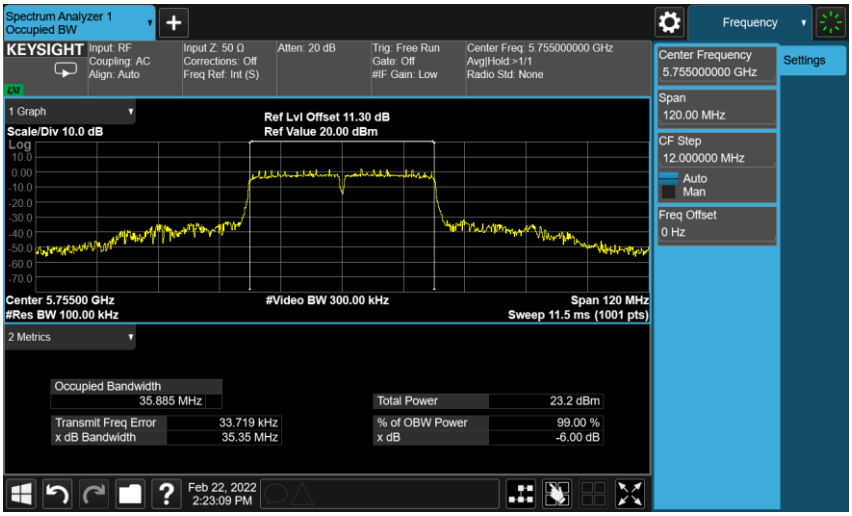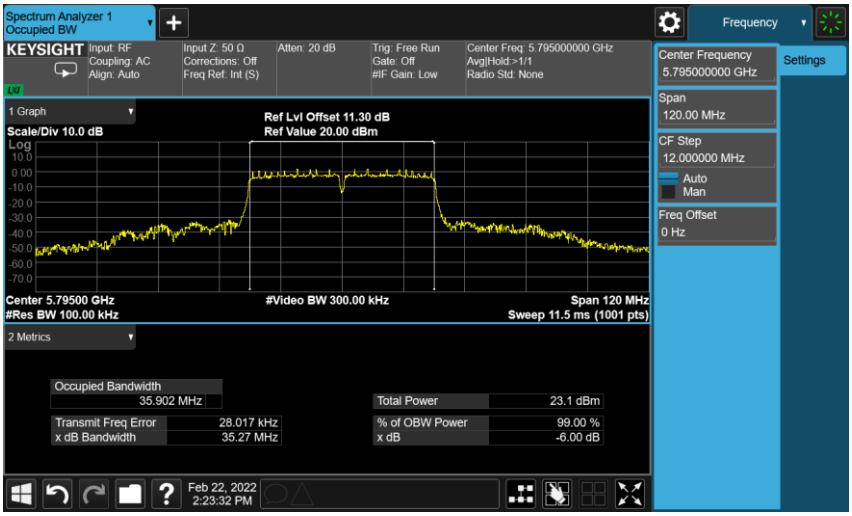Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0	
5755 MHz	
5795 MHz	

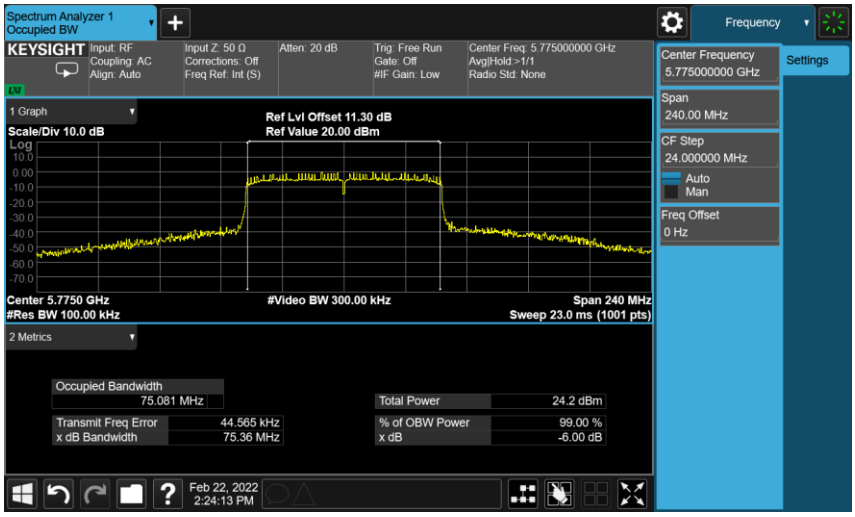Mode 11: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-0	
5775 MHz	

發射功率控制(TPC)


測試結果 ： Mode 10: EIRP = 44.463 mW < 500 mW ，故不需評估發射功率控制(TPC)。

Note：測試結果僅呈現最大 EIRP。


頻道移動時間

Test Mode	Frequency (MHz)	Radar Type	Channel Move Time (sec)	Limit (sec)
Mode 11	5610 MHz	Type 0	0.8785	10

Test Mode	Frequency (MHz)	Radar Type	Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
Mode 11	5610 MHz	Type 0	31.4992	200

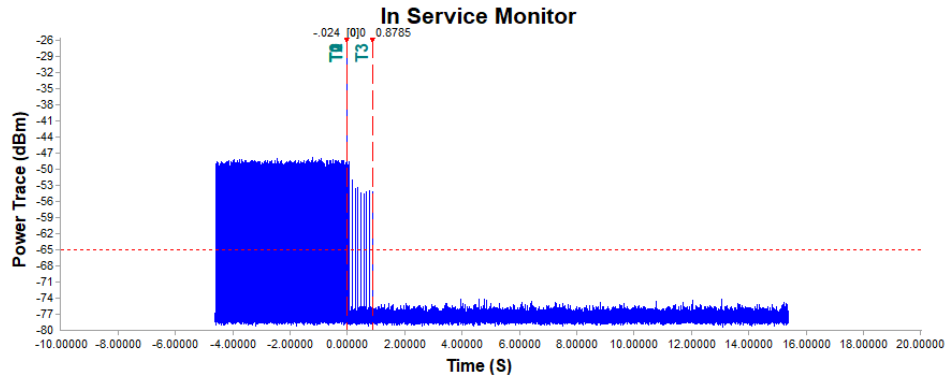Mode 11: IEEE 802.11ac 80 MHz Continuous TX Mode	
Channel Move Time / Channel Closing Transmission Time	

不可佔用時間

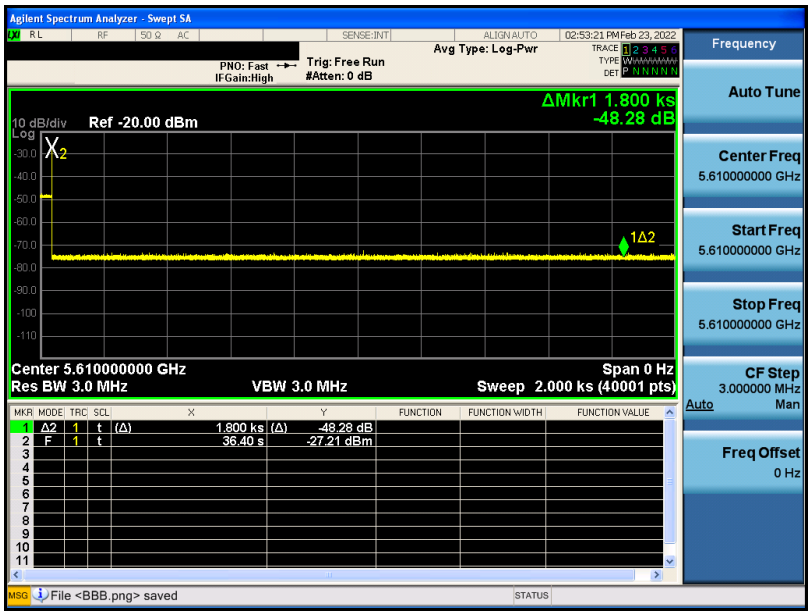Mode 11: IEEE 802.11ac 80 MHz Continuous TX Mode	
Non-Occupancy Period	

電波暴露量之評估

Band	Frequency (MHz)	Limit (mW/cm^2)	Distance [R] (cm)	Power [P] (dBm)	ANT Gain (dBi)	Numeric Gain [G] (dBi)	Duty Cycle	With Duty cycle [P] x [G] (mW)	Power Density [S] (mW/cm^2)
WLAN 2.4 GHz	2412~2462	1	20	16.86	-0.7	0.85	1	41.25	0.0082
WLAN 5 GHz	5180~5825	1	20	17.08	-0.4	0.91	1	46.456	**0.0092**

6. EUT Photos

請參照 文件編號: 22-0280_EUT External Photos 和 22-0280_EUT Internal Photos。

---END---