# RF TEST REPORT

Product Name: Pongbot Smart Multi-Sport Robot

Model Number: AURA S, AURA, AURA S PLUS, AURA S PRO

Issued For : Shanghai Future Mind. Co., Ltd.

Floor 2, Building 13, No. 27 Xinjinqiao Road, Pudong, Shanghai, China

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China

Report Number: LGT26G099RF01

Sample Received Date: Jul. 14, 2026

Date of Test: Jul. 14, 2026 ~ Jul. 22, 2026

Date of Issue: Jul. 22, 2026

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory.The results in this report only apply to the tested sample.

# TEST REPORT CERTIFICATION

| | |
|---|---|
| **Applicant:** | Shanghai Future Mind. Co., Ltd. |
| Address: | Floor 2, Building 13, No. 27 Xinjinqiao Road, Pudong, Shanghai, China |
| **Manufacturer:** | Shanghai Future Mind. Co., Ltd. |
| Address: | Floor 2, Building 13, No. 27 Xinjinqiao Road, Pudong, Shanghai, China |
| Product Name: | Pongbot Smart Multi-Sport Robot |
| Trademark: | PONGBOT |
| Model Number: | AURA S, AURA, AURA S PLUS, AURA S PRO |
| Sample Status: | Normal |

| APPLICABLE STANDARDS | |
|---|---|
| STANDARD | TEST RESULTS |
| Article 2 Paragraph 1 of Item 19, annex 43 and annex 1, MIC Notice No.88 Appendix No.43 | PASS |

Prepared by:

chris chen

Chris Chen
Engineer

Approved by:

Vita Li
Technical Director

SHENZHEN LGT TEST SERVICE CO., LTD. LGT 领冠检测

複製禁止

## Table of Contents


**1 . SUMMARY OF THE TEST RESULTS** **6**
1.1 TEST LABORATORY 7
1.2 MEASUREMENT UNCERTAINTY 7
**2. GENERAL INFORMATION** **8**
2.1 GENERAL DESCRIPTION OF THE EUT 8
2.2 DESCRIPTION OF THE TEST MODES 10
2.3 TABLE FOR PARAMETERS OF THE TEST SOFTWARE SETTING 10
2.4 TEST CONDITIONS 10
2.5 TEST ENVIRONMENTAL 10
2.6 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS 11
2.7 EQUIPMENTS LIST FOR ALL TEST ITEMS 12
**3. FREQUENCY ERROR** **13**
3.1 LIMIT 13
3.2 TEST PROCEDURES 13
3.3 TEST SETUP 13
3.4 TEST RESULT 13
**4. ANTENNA POWER** **14**
4.1 LIMIT 14
4.2 TEST PROCEDURE 14
4.3 TEST SETUP 14
4.4 TEST DEVIATION 14
4.5 TEST RESULT 14
**5. RADIATION POWER** **15**
5.1 LIMIT 15
5.2 TEST RESULT 15
**6. OCCUPIED BANDWITH** **16**
6.1 LIMIT 16
6.2 TEST PROCEDURES 16
6.3 TEST SETUP 16
6.4 TEST DEVIATION 16
6.5 TEST RESULT 16
**7. UNWANTED EMISSION INTENSITY MEASUREMENT** **17**
7.1 LIMIT 17
7.2 TEST PROCEDURES 17
7.3 TEST SETUP 18
7.4 TEST DEVIATION 18
7.5 TEST RESULT 18

**8. IMITATION OF COLLATERAL EMISSION OF RECEIVER MEASUREMENT 19**
8.1 LIMIT 19
8.2 TEST PROCEDURES 19
8.3 TEST RESULT 19
**9. TRANSMISSION RADIATION ANGLE WIDTH (3DB BEAMWIDTH) MEASUREMENT20**
9.1 LIMIT 20
9.2 TEST PROCEDURES 20
9.3 TEST SETUP 20
9.4 TEST DEVIATION 20
9.5 TEST RESULT 20
**10. RADIO INTERFERENCE PREVENTION CAPABILITY MEASUREMENT 21**
10.1 LIMIT 21
10.2 MEASURING ID CODE SOFTWARE 21
10.3 TEST PROCEDURES 21
10.4 TEST SETUP 21
10.5 TEST DEVIATION 21
10.6 TEST RESULT OF RADIO INTERFERENCE PREVENTION CAPABILIT 22
**11. CARRIER SENSE CAPABILITY 23**
11.1 INTERFERENCE PREVENTION FUNCTION 23
11.2 TEST REQUIREMENT 23
11.3 TEST PROCEDURE 23
11.4 TEST RESULT 23
**APPENDIX I - TEST RESULTS 24**
1. DUTY CYCLE 24
2. FREQUENCY ERROR 26
3. OCCUPIED BANDWIDTH 28
4. ANTENNA POWER 31
5. SPURIOUS EMISSION INTENSITY 32
6. SECONDARY RADIATED EMISSION 36
**APPENDIX II - TEST SETUP PHOTOS 40**
**APPENDIX III - PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS 41**

## Revision History

| Rev. | Issue Date | Contents |
|---|---|---|
| 00 | Jul. 22, 2026 | Initial Issue |
| | | |

複製禁止

## 1. SUMMARY OF THE TEST RESULTS

Test procedures according to the technical standards: annex 43 of Notification No.88.

| Rule Section | Description of Test | Judgement |
|---|---|---|
| 3.2 | Frequency Error | PASS |
| 3.2 | Occupied Bandwidth (99%) | PASS |
| 3.2 | Unwanted Emission Intensity | PASS |
| 3.2 | Power Error | PASS |
| 3.3 | Limitation of Collateral Emission of Receiver | PASS |
| 3.6 | Transmission Radiation power | PASS |
| 3.2 | Transmission Radiation Angle Width (3dB Beamwidth) | N/A |
| 3.4 | Radio Interference Prevention Capability | PASS |
| Note(2) | Carrier Sense Capability | N/A |
| 3.7 | Construction Protection Confirmation | PASS |

Note:

(1) “N/A” means test is not applicable in this Test Report.

(2) Article 2 Paragraph 1 of Item 19.

(3) This device has more than 1 subcarrier in 1MHz, complicances with the requirement.

複製禁止

## 1.1 TEST LABORATORY

| | |
|---|---|
| Company Name: | Shenzhen LGT Test Service Co., Ltd. |
| Address: | Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China |

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement **y** ±**U**, where expended uncertainty **U** is based on astandard uncertainty multiplied by a coverage factor of **k=2**, providing a level of confidence of approximately **95**%.

| No. | Item | Uncertainty |
|---|---|---|
| 1 | RF Output Power, Conducted | ±0.71dB |
| 2 | Conducted emission | ±2.80dB |
| 3 | Temperature | ±0.5°C |

Note: The measurement uncertainty is not included in the test result.

複製禁止

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF THE EUT

| | |
|---|---|
| Product Name: | Pongbot Smart Multi-Sport Robot |
| Test Model Number: | AURA S |
| Series Number: | AURA, AURA S PLUS, AURA S PRO |
| Model Difference: | Only difference in appearance color. |
| Product Description: | Operation Frequency: 2402~2480 MHz<br>Modulation Type: GFSK (1M PHY, 2M PHY)<br>Number Of Channel: 40CH<br>Antenna Designation: FPC Antenna<br>Antenna Gain(dBi): 2.96<br>Based on the application, features, or specification exhibited in User Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User Manual. |
| Channel List: | Please refer to the Note 3. |
| Rating: | Input: DC 24V 2A |
| Battery: | Capacity: 4500mAh<br>Rated Voltage: 22.2V |
| Hardware Version: | N/A |
| Software Version: | N/A |
| Connecting I/O Port(s): | Please refer to the Note 1. |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna information refers to the manufacturer provide report, applicable only to the tested sample identified in the report. Due to the incorrect antenna information, a series of problems such as the accuracy of the test results will be borne by the customer.

3.

| Channel List | | | | | |
|---|---|---|---|---|---|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 00 | 2402 | 14 | 2430 | 28 | 2458 |
| 01 | 2404 | 15 | 2432 | 29 | 2460 |
| 02 | 2406 | 16 | 2434 | 30 | 2462 |
| 03 | 2408 | 17 | 2436 | 31 | 2464 |
| 04 | 2410 | 18 | 2438 | 32 | 2466 |
| 05 | 2412 | 19 | 2440 | 33 | 2468 |
| 06 | 2414 | 20 | 2442 | 34 | 2470 |
| 07 | 2416 | 21 | 2444 | 35 | 2472 |
| 08 | 2418 | 22 | 2446 | 36 | 2474 |
| 09 | 2420 | 23 | 2448 | 37 | 2476 |
| 10 | 2422 | 24 | 2450 | 38 | 2478 |
| 11 | 2424 | 25 | 2452 | 39 | 2480 |
| 12 | 2426 | 26 | 2454 | -- | -- |
| 13 | 2428 | 27 | 2456 | -- | -- |

Regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selectedchannel see below:

| Lowest frequency | | Highest frequency | |
|---|---|---|---|
| 00 | 2402 | 39 | 2480 |

複製禁止

## 2.2 DESCRIPTION OF THE TEST MODES

| Pretest Mode | Description |
|---|---|
| Mode 1 | 1M PHY (CH00 CH39) |
| Mode 2 | 2M PHY (CH00 CH39) |

## 2.3 TABLE FOR PARAMETERS OF THE TEST SOFTWARE SETTING

| Type | Mode Or Modulation type | Power Class | Software For Testing |
|---|---|---|---|
| BLE_1M PHY | GFSK | Default | EspRFTestTool_v5.2 |
| BLE_2M PHY | GFSK | Default | |

## 2.4 TEST CONDITIONS

Power Supply Voltage Fluctuation Test

| Voltage Fluctuation Test | Normal Voltage | High Voltage +10% of Normal Voltage | Low Voltage -10% of Normal Voltage |
|---|---|---|---|
| Input DC Power(V) | 22.2 | 24.42 | 19.98 |
| RF Chip Input DC Power(V) | 3.300 | 3.321 | 3.280 |
| Voltage Variation (%) | / | 0.64 | -0.61 |

Note: 1. Voltage Variation (%)
= (RF chip Input high or Low Voltage - RF chip Input Normal Voltage)/ RF chip Input Normal Voltage* 100
2. RF chip Input DC power fluctuation is verified at the power input PIN of the RF chip.

When the input supply voltage to the EUT from the external power source is varied by +/- 10%, the output voltage had been confirmed that the fluctuation of power supply to the RF circuit of EUT (excluding power source) is equal to or less than +/-1%, and the DC power fluctuation at the power input PIN of the RF chip is equal to or less than +/-1%.Exempt extremely high and low supply voltage condition tests, EUT only operated in normal voltage to test all regulations.
During the measurement the environmental conditions：

## 2.5 TEST ENVIRONMENTAL

During the measurement the environmental conditions
Normal Temperature: 24.5°C
Relative Humidity: 53 %
Air Pressure: 101.78 kPa

## 2.6 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

| Item | Equipment | Mfr/Brand | Model/Type No. | Length | Note |
|---|---|---|---|---|---|
| N/A | N/A | N/A | N/A | N/A | N/A |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

Support units

| Item | Equipment | Mfr/Brand | Model/Type No. | Length | Note |
|---|---|---|---|---|---|
| N/A | N/A | N/A | N/A | N/A | N/A |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

Note:

(1) For detachable type I/O cable should be specified the length in cm in『Length』column.

複製禁止

## 2.7 EQUIPMENTS LIST FOR ALL TEST ITEMS

| Equipment | Manufacturer | Model No. | Serial No. | Cal. Date | Cal. Until | Classification |
|---|---|---|---|---|---|---|
| Signal Analyzer | Keysight | N9020A | MY50530994 | 2026-03-02 | 2027-03-01 | (c) |
| Power Sensor | R&S | NRP8S | 104963 | 2026-03-02 | 2027-03-01 | (c) |
| RF Automatic Test system | TST | TST PASS | 293 | 2025-07-15 | 2026-07-14 | (c) |
| MXG Vector Signal Generator | Keysight | N5182B | MY59100717 | 2026-03-03 | 2027-03-02 | (c) |
| Temperature& Humidity test chamber | AISRY | LX-1000L | 171200018 | 2025-07-30 | 2026-07-29 | (c) |
| Attenuator | eastsheep | 90db | N.A | 2026-03-02 | 2027-03-01 | (c) |
| Temperature & Humidity | JINGCHUANG | BT-3 | N.A | 2026-03-05 | 2027-03-04 | (c) |
| Digital multimeter | MASTECH | MS8261 | MBGBC83053 | 2025-07-30 | 2026-07-29 | (c) |
| DC source | Keysight | E3634A | MY58036468 | 2026-03-05 | 2027-03-04 | (c) |
| Testing Software | TST Pass_2.0.2 | | | | | |

Remark:
(a) Calibration conducted by the National institute of Information and Communications Technology (NICT) inJapan (hereinafter referred to as "NICT") or a designated calibration agency under Article 102-18 paragraph(1) in JRL.
(b) Correction conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Act (ActNo. 51 of 1992).
(c) Calibration conducted in countries except Japan, which shall be equivalent to the calibration conducted bythe NICT or a designated calibration agency under Article 102-18 paragraph (1).(d) Calibration, etc. conducted by using measuring instruments and other equipment listed in the right columnof appended table No. 3, which shall have been given any type of calibration, etc. listed above from (a) to (c)
From JRL Article 24-2, paragraph 4, Item 2
Notice: Calibration duration for above equipments is 1 year.
Test Equipment Calibration
All of the test equipment is effective use and calibration certification institution, LISAI, the address is No.8.South Street Shi li institute Guangzhou.Guangdong.China

## 3. FREQUENCY ERROR

### 3.1 LIMIT

| Item | Limits |
|---|---|
| Frequency Error | ±50ppm |

### 3.2 TEST PROCEDURES

The following table is the setting of Spectrum Analyzer.

| Spectrum Parameter | Setting |
|---|---|
| Attenuation | Auto |
| RBW / VBW | 10KHz |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | Auto |

(1) In the case of unmodulated signal (continuous or continuous burst), measure the frequency directly by a frequency meter.
(2) In the case of burst waves, the measurement shall be done for enough time in order to obtain the enough measuring accuracy, and the average of the measured values becomes the final value.
(3) In the case of a test mode with a specific frequency spectrum, measure the frequency of the specific spectrum by a spectrum analyzer.
(4) In the cases above, if the frequency equivalent to the test frequency is not directly measured in principle, it shall be obtained by necessary calculation.

In the case of modulated signal, if there is no specific spectrum measurable by a spectrum analyzer but a specific dip is observed, it is allowed to measure the frequency with the signal generator (synthesized). That is, observe a signal of the signal generator concurrently (or alternately) with the tested signal using the spectrum analyzer while setting the frequency of the signal generator to the position of the dip on the screen of the spectrum analyzer, and determine the frequency of the signal generator at the time as a measured value.

### 3.3 TEST SETUP

### 3.4 TEST RESULT

For the measurement records, refer to the appendix I.

## 4. ANTENNA POWER

### 4.1 LIMIT

| Item | Limits |
|---|---|
| Antenna PowerDensity | ≦3mW/MHz (FH from 2400 – 2483.5 MHz)<br>≦10mW/MHz (OFDM,DS from2400~2483.5MHz,802.11b/g/n HT20)<br>≦5mW/MHz (OFDM,DS from2400~2483.5MHz,802.11n HT40)<br>≦10mW (Other from 2400~2483.5MHz) |
| Power Error | +20% |

### 4.2 TEST PROCEDURE

1. EUT turn to test frequency channel and keep continuous transmiting.
2. Reading the output power from the Power meter as $P_{EUT.}$
3. Turn the Signal generator to frequency channel the same as the EUT.
4. Turn the level of Signal generator, scan with the power meter until the power equal to $P_{EUT}$, the level of Signal generator recorded as “P”.
5. The antenna power of EUT is “P”.
6. EIRP power=“P”+antenna gain.

### 4.3 TEST SETUP

### 4.4 TEST DEVIATION

There is no deviation with the original standard.

### 4.5 TEST RESULT

For the measurement records, refer to the appendix I.

## 5. RADIATION POWER

### 5.1 LIMIT

| Item | Limits |
|---|---|
| Radiation powerEIRP | FH form 2400 – 2483.5MHz,EIRP≦6.91dBm/MHz<br>CCK/OFDM/DBPSK (2400~2483.5MHz)<br>OFDM or DS other than (802.11b/g/n HT20) EIRP≦12.14 dBm/MHz<br>OFDM or DS other than (802.11n HT40) EIRP≦9.13dBm/MHz<br>Other from 2400~2483.5MHz: 12.14 dBm or less |

### 5.2 TEST RESULT

For the measurement records, refer to the appendix I.

# 6. OCCUPIED BANDWITH

## 6.1 LIMIT

| Item | Limits |
|---|---|
| Occupied Band Width: | 83.5MHz for FHSS; 26MHz for DSSS and OFDM; 26 ~ 40MHz for OFDM(HT40) |

## 6.2 TEST PROCEDURES

1. EUT have transmitted the maximum modulation signal and fixed channelize (For DSSS or OFDM Device) or continuous maximum power of hopping mode (For FHSS Device).
   SA set to 99% of occupied bandwidth to measure occupied bandwidth. The limit is less than 26MHz (For DSSS or OFDM Device), 83.5MHz (For FHSS Device) or 38MHz (For OFDM (HT 40)).

## 6.3 TEST SETUP

## 6.4 TEST DEVIATION

There is no deviation with the original standard.

## 6.5 TEST RESULT

For the measurement records, refer to the appendix I.

# 7. UNWANTED EMISSION INTENSITY MEASUREMENT

## 7.1 LIMIT

| Item | Limits |
|---|---|
| TX Spurious Emission | ≦2.5 Mw/MHz (30MHz≦f≦1000MHz) |
| | ≦2.5 μW/MHz (1000MHz<f≦2387MHz) |
| | ≦25 μW/MHz (2387MHz<f≦2400MHz) |
| | ≦25 μW/MHz (2483.5MHz≦f<2496.5MHz) |
| | ≦2.5 μW/MHz (2496.5MHz≦f<12500MHz) |

## 7.2 TEST PROCEDURES

The following table is the setting of Spectrum Analyzer.

| Spectrum Parameter | Setting |
|---|---|
| Attenuation | Auto |
| RBW / VBW | 1MHz /1MHz (Below 1GHz) |
| RBW / VBW | 1MHz /1MHz (Above 1GHz) |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | Auto |

1. EUT have transmitted the maximum modulation signal and fixed channelize.
2. Setting of SA is following as: Below 1GHz RB: 100KHz / VB: 100KHz, Above 1GHz RB: 1MHz / VB: 1MHz / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold
3. Setting of SA is following as 30MHz and stop frequency 1000MHz, then to mark peak reading value + cable loss shall be less than 2.5μW.
4. Setting of SA is following as 1000MHz and stop frequency 2387MHz, then to mark peak reading value + cable loss shall be less than 2.5μW.
5. SA adjusted to start frequency 2387MHz and stop frequency 2400MHz, then to mark peak reading value + cable loss shall be less than 25μW.
6. SA adjusted to start frequency 2483.5MHz and stop frequency 2496.5MHz, then to mark peak reading value + cable loss shall be less than 25μW
7. SA adjusted to start frequency 2496.5MHz and stop frequency 12750MHz, then to mark peak reading value + cable loss shall be less than 2.5μW
8. If the Result_Value is over the requirement, take total sum of 1MHz band centered at the spur frequency like ACLP measurement as Result_Value.

### 7.3 TEST SETUP

### 7.4 TEST DEVIATION

There is no deviation with the original standard.

### 7.5 TEST RESULT

For the measurement records, refer to the appendix I.

# 8. IMITATION OF COLLATERAL EMISSION OF RECEIVER MEASUREMENT

## 8.1 LIMIT

| Item | Limits |
|---|---|
| RX Spurious Emission: | ≦ 4nW (f<1GHz) |
| | ≦ 20nW (1GHz≦ f) |

## 8.2 TEST PROCEDURES

The following table is the setting of Spectrum Analyzer.

| Spectrum Parameter | Setting |
|---|---|
| Attenuation | Auto |
| RBW | 100 kHz (below 1GHz emissions)<br>1 MHz (above 1GHz emissions) |
| VBW | 100 kHz (below 1GHz emissions)<br>1 MHz (above 1GHz emissions) |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | Auto |

1. EUT have the continuous reception mode and fixed only one channelize.
2. Setting of SA is following as RB / VB: 100 kHz (below 1GHz emissions) / 1 MHz (above 1GHz emissions) /Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold
3. SA set RB: 100kHz and VB: 100kHz. Then adjust to start frequency 30MHz and stop frequency 1000MHz. Search to mark peak reading value + cable loss shall be less than 4nW.
4. SA set RB: 1MHz and VB: 1MHz. Then adjust to start frequency 1000MHz and stop frequency 12500MHz. Search to mark peak reading value + cable loss shall be less than 20nW.
5. If power level of lower emissions are more than 1/10 of limit (.0.4nW for f < 1GHz, 2nW for f >= 1GHz), all those are to be indicated in the 2nd and 3rd lines. If others are 1/10 or less more of the limit, no necessary to be indicated.

## 8.3 TEST RESULT

For the measurement records, refer to the appendix I.

# 9. TRANSMISSION RADIATION ANGLE WIDTH (3DB BEAMWIDTH) MEASUREMENT

## 9.1 LIMIT

| Item | Limits |
|---|---|
| 3dB antenna beam width | e ≦ 360/A (The A is 10 in maximum)<br>A = {EIRP Power [mW/MHz] /{2.14dBi+output power(10mW /MHz, 3mW/MHz)}<br>Shall be 1 when A is lower than 1 |

## 9.2 TEST PROCEDURES

| Spectrum Parameter | Setting |
|---|---|
| Attenuation | Auto |
| Span Frequency | 0 MHz |
| RBW | 1 MHz |
| VBW | 1 kHz |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | Auto |

1. Set EUT and measuring antenna at the same height and roughly facing each other.
2. Set spectrum analyzer with condition in section 4.7.2 and tune reference level to observe receving signal position.
3. Rotate directions of the EUT horizontally and ertically to find the maximum receiving power.
4. Move the measuring antenna height up and down within ± 50cm of EUT height and swing it to find the maximum output of measuing antenna. “E” is the half-power beam width (angle between two points at which radiated power becomes 1/2).
5. Caluate permitted radiation angle in horizontal and vertical using EIRP measured in another test method.
6. Calculate 3dB antenna beam width by the formula below 360/A (The A is 10 in maximum).
   e ≦ 360/A (The A is 10 in maximum)
   A = {EIRP Power [mW/MHz] /{2.14dBi+output power(10mWMHz, 3mW/MHz)}
   Shall be 1 when A is lower than 1

## 9.3 TEST SETUP

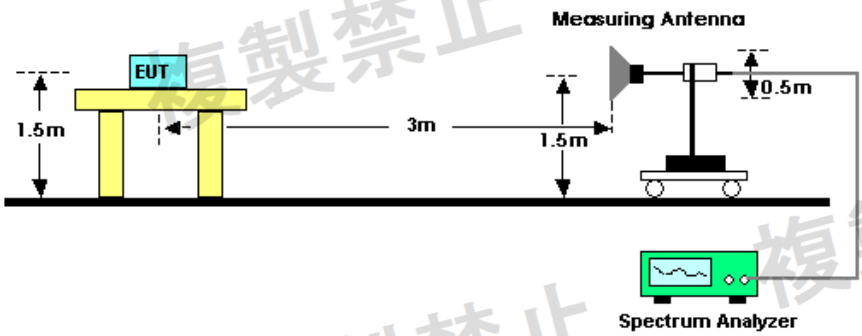


## 9.4 TEST DEVIATION

There is no deviation with the original standard.

## 9.5 TEST RESULT

As the EUT max EIRP is less than 12.14dBm, so the test is not applicable and skipped.

# 10. RADIO INTERFERENCE PREVENTION CAPABILITY MEASUREMENT

## 10.1 LIMIT

| Item | Limits |
|---|---|
| Identification code | ≧48 bits |

## 10.2 MEASURING ID CODE SOFTWARE

| Item | Limits |
|---|---|
| MAC IP List | MAC Scan |

## 10.3 TEST PROCEDURES

1. In the case that the EUT has the function of automatically transmitting the identification code:
   a. Transmit the predetermined identification codes form EUT.
   b. Check the transmitted identification codes with the demodulator.
2. In the case of receiving the identification ocde:
   a. Transmit the predetermined identification codes form the counterpart.
   b. Check if communication is normal.
   c. Transmit the signals other than predetermined ID codes form the counterpart.
   d. check if the EUT stops the transmission, or if it displays that idnetification codes are different from the predetermined ones.

## 10.4 TEST SETUP

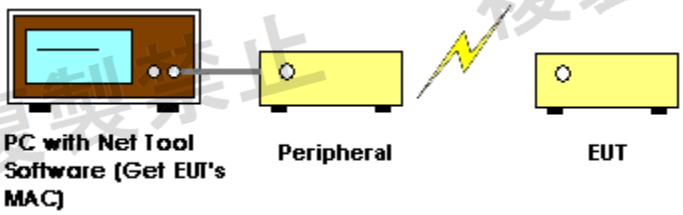


## 10.5 TEST DEVIATION

There is no deviation with the original standard.

## 10.6 TEST RESULT OF RADIO INTERFERENCE PREVENTION CAPABILIT

The MAC address is 38:95:92:AA:9A:35.

# 11. CARRIER SENSE CAPABILITY

## 11.1 INTERFERENCE PREVENTION FUNCTION

## 11.2 TEST REQUIREMENT

MIC Notice No.88 Appendix No.43

Article 2, Paragraph 1, Item 19 Rules Section 10

## 11.3 TEST PROCEDURE

1. SG adjusted the frequency as same as the EUT transmitted signal and emitted the absence of modulation from SG and power level is (22.79+G-20*log(f)dBm) (G is the antenna gain, f is the test frequency).
2. Turn off the RF signal of the SG.
3. EUT have transmitted the maximum modulation signal and fixed channelize.
4. Setting of SA: RBW/VBW=1MHz/1MHz, Span=0MHz, Sweep time=auto, Sweep mode=continuous, Detect mode=positive peak
5. SG RF signal on.
6. EUT shall be stop the transmitted any signal and SG RF signal off, the EUT will be continuous

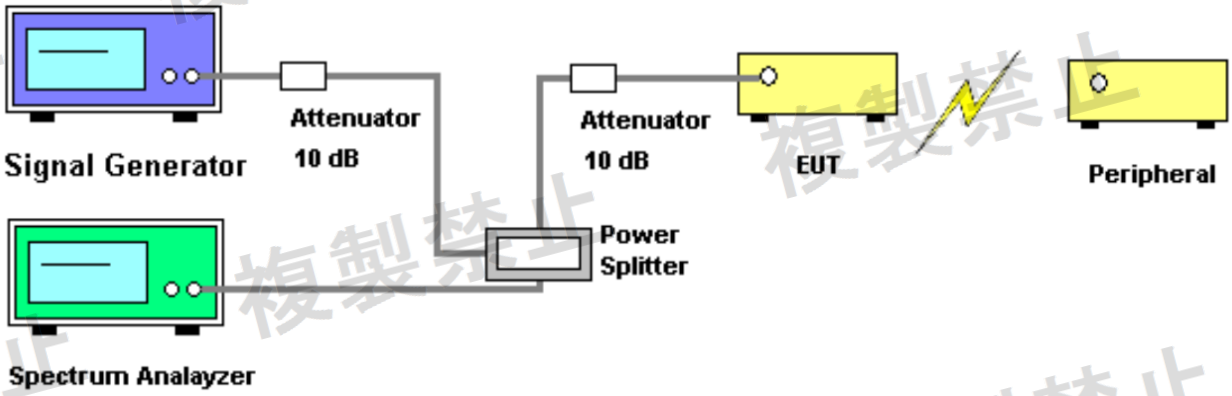


## 11.4 TEST RESULT

Not applicable.

# APPENDIX I - TEST RESULTS

1. DUTY CYCLE
1.1 Test Result
1.1.1 Ant1

| Ant1 | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| ENV | Mode | TX Type | Frequency (MHz) | T_on (ms) | Period (ms) | Duty Cycle (%) | Duty Cycle Correction Factor (dB) | Max. DC Variation (%) |
| NTNV | 1M | SISO | 2402 | 2.096 | 3.126 | 67.05 | 1.74 | 16.77 |
| | 2M | SISO | 2402 | 1.071 | 1.875 | 57.12 | 2.43 | 0.03 |

複製禁止

1.2 Test Graph

1.2.1 Ant1

| 1M_2402MHz_Ant1_NTNV |
| --- |
| 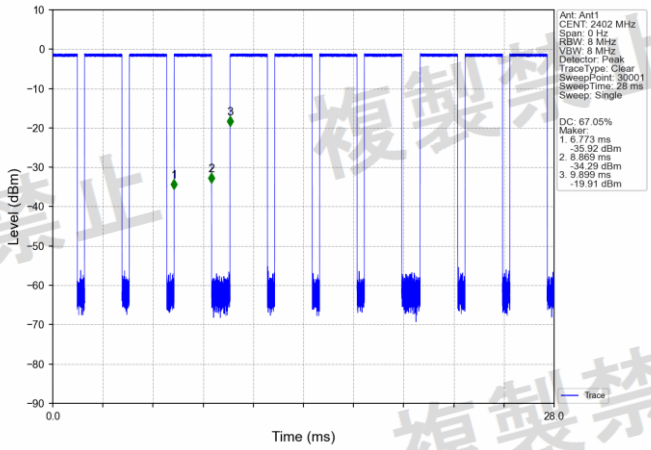 |



| 2M_2402MHz_Ant1_NTNV |
| --- |
| 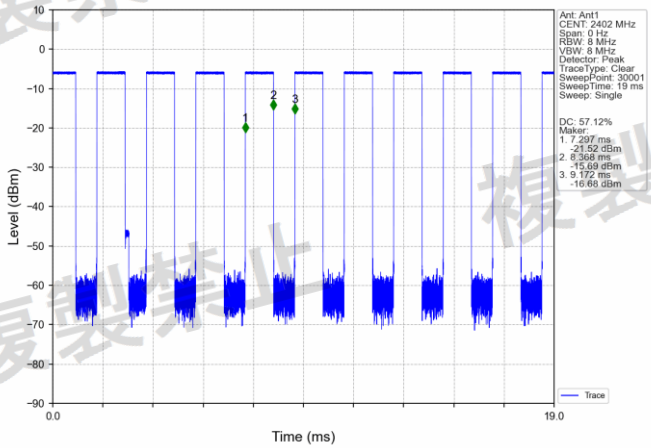 |

## 2. FREQUENCY ERROR

### 2.1 Test Result

#### 2.1.1 Ant1

| Ant1 | | | | | | | |
|---|---|---|---|---|---|---|---|
| ENV | Mode | TX Type | Frequency (MHz) | Measured Frequency (MHz) | Tolerance (ppm) | | Verdict |
| | | | | | Result | Limit | |
| NTNV | Carrier Wave | SISO | 2402 | 2401.999 | -0.42 | -50 to 50 | Pass |
| | | | 2480 | 2479.999 | -0.40 | -50 to 50 | Pass |

2.2 Test Graph

2.2.1 Ant1

| Frequency Error_NTNV_Carrier Wave_2402MHz_Ant1_NTNV |
|---|
| 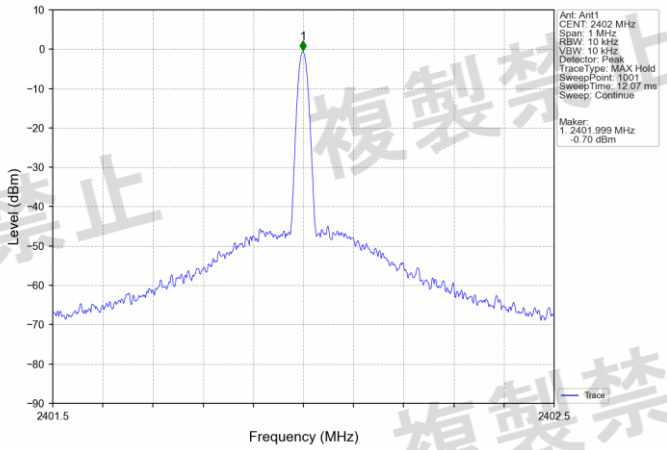 |



| Frequency Error_NTNV_Carrier Wave_2480MHz_Ant1_NTNV |
|---|
| 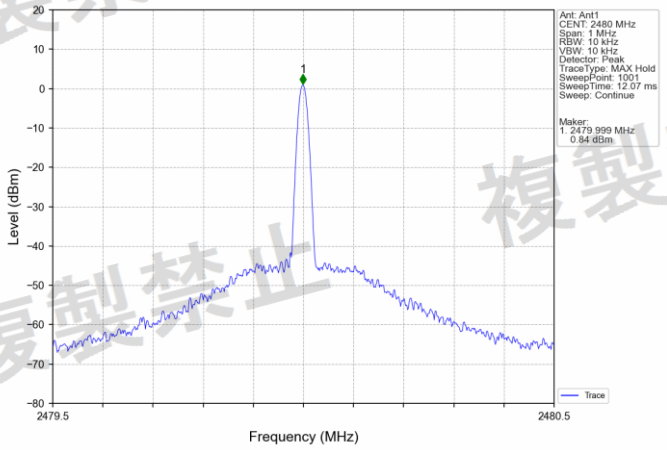 |

## 3. OCCUPIED BANDWIDTH

### 3.1 Test Result

#### 3.1.1 OBW

| ENV | Mode | TX Type | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | | Verdict |
|---|---|---|---|---|---|---|
| | | | | ANT1 | Limit | |
| NTNV | 1M | SISO | 2402 | 1.204 | <=26 | Pass |
| | | | 2480 | 1.207 | <=26 | Pass |
| | 2M | SISO | 2402 | 2.170 | <=26 | Pass |
| | | | 2480 | 2.172 | <=26 | Pass |

複製禁止

3.2 Test Graph

3.2.1 OBW

1M_2402MHz_Ant1_NTNV

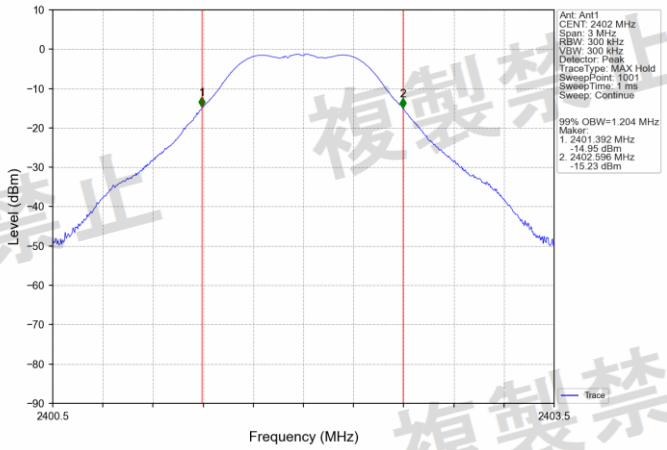


1M_2480MHz_Ant1_NTNV

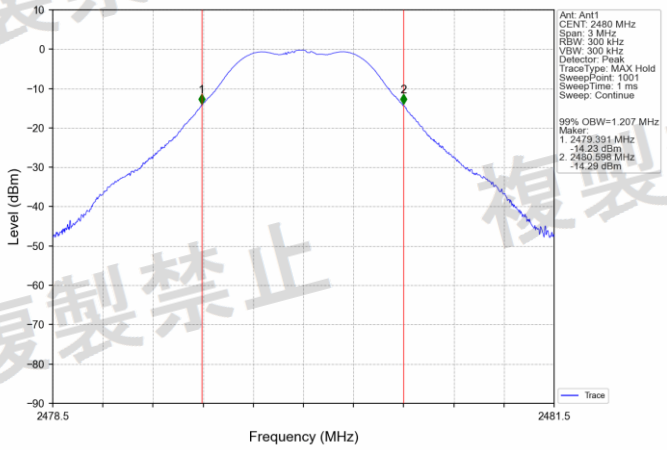


2M_2402MHz_Ant1_NTNV

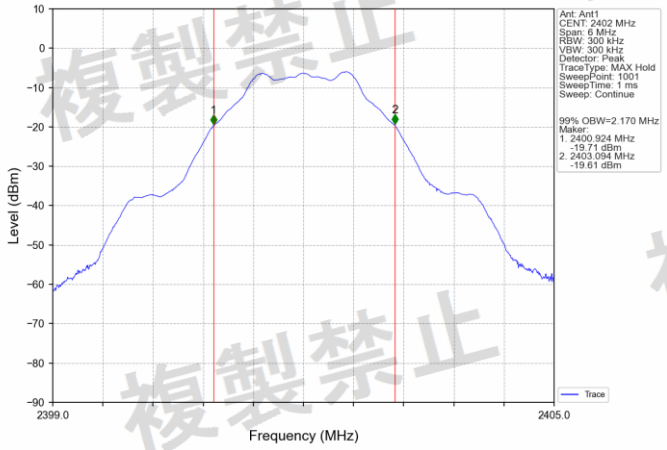

| 2M_2480MHz_Ant1_NTNV |
| --- |
| 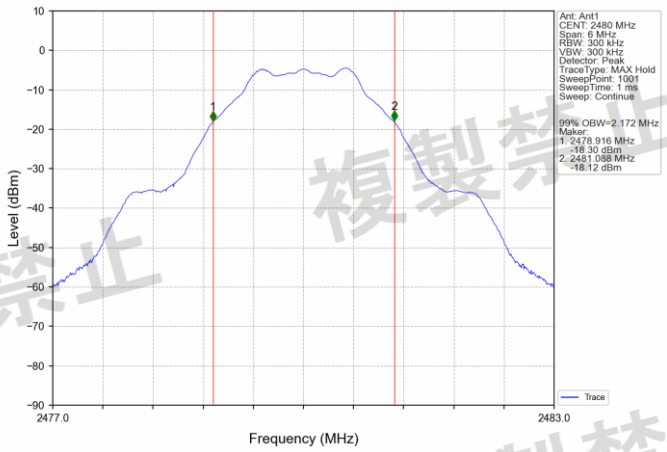 |

## 4. ANTENNA POWER

### 4.1 Test Result

#### 4.1.1 Power

| ENV | Mode | TX Type | Frequency (MHz) | ANT | Antenna Power (mW) | | Nominal Power (mW) | Tolerance (%) | | Verdict |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | Measured | Limit | | Measured | Limit | |
| NTNV | 1M | SISO | 2402 | 1 | 0.676 | <=10.00 | 0.8 | -15.50 | <=20 | Pass |
| | | | 2480 | 1 | 0.816 | <=10.00 | 0.8 | 2.00 | <=20 | Pass |
| | 2M | SISO | 2402 | 1 | 0.231 | <=10.00 | 0.33 | -30.00 | <=20 | Pass |
| | | | 2480 | 1 | 0.329 | <=10.00 | 0.33 | -0.30 | <=20 | Pass |

| ENV | Mode | TX Type | Frequency (MHz) | ANT | Antenna Power (dBm) | Gain (dBi) | EIRP Power (dBm) | Limit (dBm) | Verdict |
|---|---|---|---|---|---|---|---|---|---|
| NTNV | 1M | SISO | 2402 | 1 | -1.70 | 2.96 | 1.26 | <=12.14 | Pass |
| | | | 2480 | 1 | -0.88 | 2.96 | 2.08 | <=12.14 | Pass |
| | 2M | SISO | 2402 | 1 | -6.36 | 2.96 | -3.40 | <=12.14 | Pass |
| | | | 2480 | 1 | -4.83 | 2.96 | -1.87 | <=12.14 | Pass |

## 5. SPURIOUS EMISSION INTENSITY

### 5.1 Test Result

#### 5.1.1 TxSe_NTNV

| NTNV | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Mode | TX Type | Freq. (MHz) | ANT | Freq. Range | | Marker | | | | | Limit (uW /MHz) | Verdict |
| | | | | Start (MHz) | Stop (MHz) | Freq. (MHz) | PK Power (dBm /MHz) | PK Power (uW /MHz) | AV Power (dBm /MHz) | AV Power (uW /MHz) | | |
| 1M | SISO | 2402 | 1 | 30 | 2387 | 1746 | -44.52 | 0.035 | / | / | 2.5 | Pass |
| | | | | 2387 | 2400 | 2399.987 | -38.48 | 0.142 | / | / | 25 | Pass |
| | | | | 2483.5 | 2496.5 | 2490.871 | -58.45 | 0.001 | / | / | 25 | Pass |
| | | | | 2496.5 | 12500 | 3203.5 | -43.94 | 0.040 | / | / | 2.5 | Pass |
| | | 2480 | 1 | 30 | 2387 | 827.5 | -51.48 | 0.007 | / | / | 2.5 | Pass |
| | | | | 2387 | 2400 | 2388.898 | -56.62 | 0.002 | / | / | 25 | Pass |
| | | | | 2483.5 | 2496.5 | 2483.526 | -51.68 | 0.007 | / | / | 25 | Pass |
| | | | | 2496.5 | 12500 | 3307.5 | -43.98 | 0.040 | / | / | 2.5 | Pass |
| 2M | SISO | 2402 | 1 | 30 | 2387 | 54 | -32.14 | 0.611 | / | / | 2.5 | Pass |
| | | | | 2387 | 2400 | 2399.987 | -28.87 | 1.297 | / | / | 25 | Pass |
| | | | | 2483.5 | 2496.5 | 2483.539 | -63.66 | 0.000 | / | / | 25 | Pass |
| | | | | 2496.5 | 12500 | 5201 | -52.38 | 0.006 | / | / | 2.5 | Pass |
| | | 2480 | 1 | 30 | 2387 | 54.5 | -32.84 | 0.520 | / | / | 2.5 | Pass |
| | | | | 2387 | 2400 | 2394.475 | -63.43 | 0.000 | / | / | 25 | Pass |
| | | | | 2483.5 | 2496.5 | 2483.526 | -56.37 | 0.002 | / | / | 25 | Pass |
| | | | | 2496.5 | 12500 | 6007 | -61.75 | 0.001 | / | / | 2.5 | Pass |

5.2 Test Graph

5.2.1 TxSe_NTNV

1M_2402MHz_Ant1_NTNV

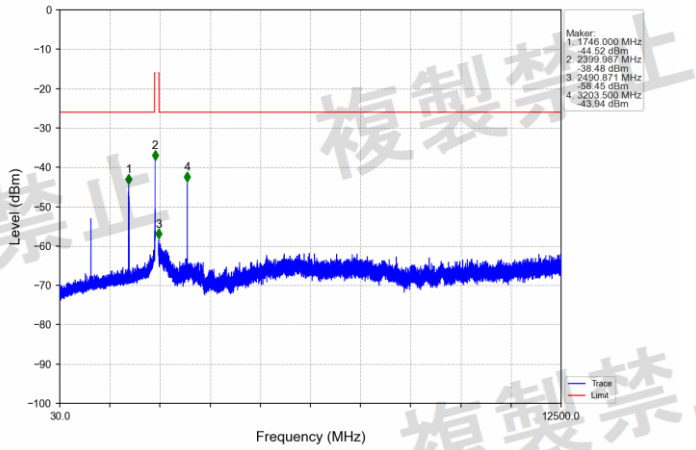


1M_2402MHz_Ant1_NTNV

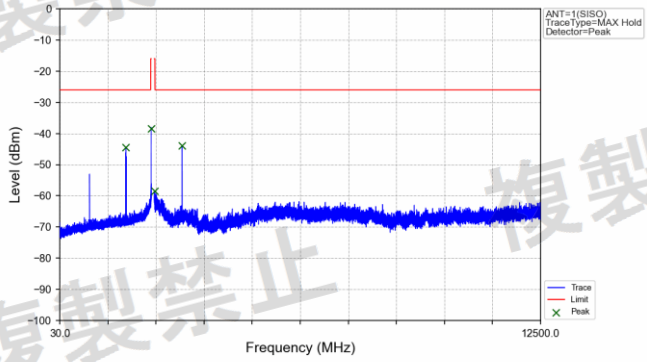


| Start (MHz) | Stop (MHz) | RBW (MHz) | VBW (MHz) | Freq (MHz) | PK Power (dBm) | AV Power (dBm) | Limit (dBm) | Result |
|---|---|---|---|---|---|---|---|---|
| 30 | 2387 | 1 | 1 | 1746.000 | -44.52 | / | -26 | Pass |
| 2387 | 2400 | 1 | 1 | 2399.987 | -38.48 | / | -16 | Pass |
| 2483.5 | 2496.5 | 1 | 1 | 2490.871 | -58.45 | / | -16 | Pass |
| 2496.5 | 12500 | 1 | 1 | 3203.500 | -43.94 | / | -26 | Pass |

1M_2480MHz_Ant1_NTNV

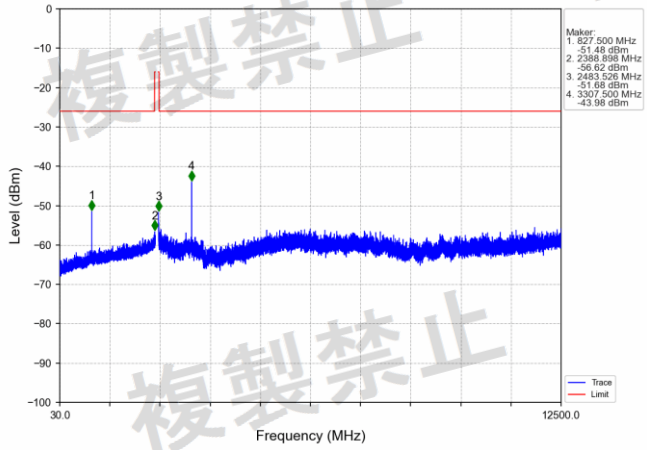

## 1M_2480MHz_Ant1_NTNV

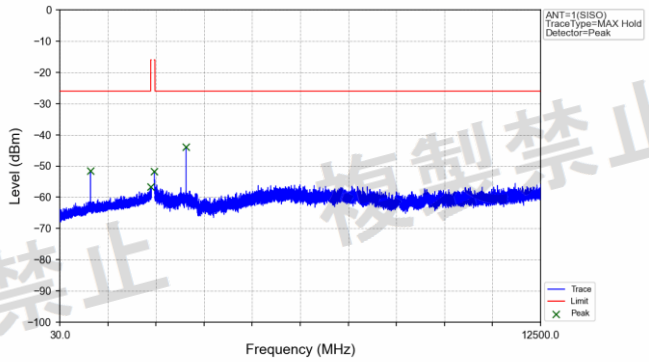


| Start (MHz) | Stop (MHz) | RBW (MHz) | VBW (MHz) | Freq (MHz) | PK Power (dBm) | AV Power (dBm) | Limit (dBm) | Result |
|---|---|---|---|---|---|---|---|---|
| 30 | 2387 | 1 | 1 | 827.500 | -51.48 | / | -26 | Pass |
| 2387 | 2400 | 1 | 1 | 2388.898 | -56.62 | / | -16 | Pass |
| 2483.5 | 2496.5 | 1 | 1 | 2483.526 | -51.68 | / | -16 | Pass |
| 2496.5 | 12500 | 1 | 1 | 3307.500 | -43.98 | / | -26 | Pass |

## 2M_2402MHz_Ant1_NTNV

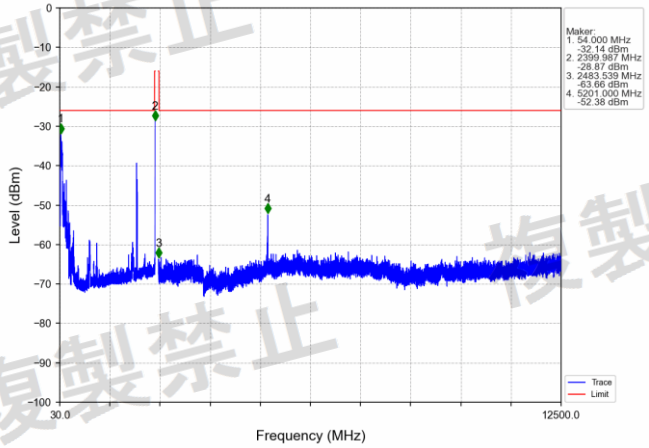


## 2M_2402MHz_Ant1_NTNV

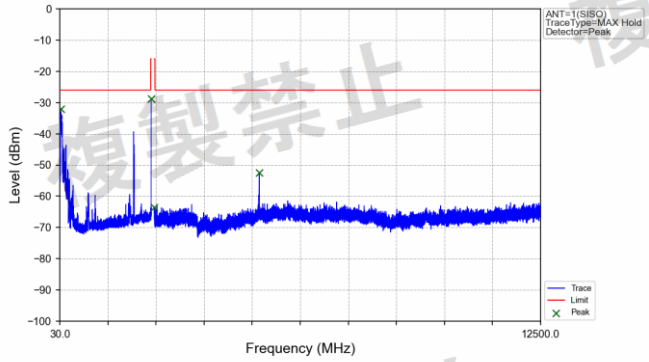


| Start (MHz) | Stop (MHz) | RBW (MHz) | VBW (MHz) | Freq (MHz) | PK Power (dBm) | AV Power (dBm) | Limit (dBm) | Result |
|---|---|---|---|---|---|---|---|---|
| 30 | 2387 | 1 | 1 | 54.000 | -32.14 | / | -26 | Pass |
| 2387 | 2400 | 1 | 1 | 2399.987 | -28.87 | / | -16 | Pass |
| 2483.5 | 2496.5 | 1 | 1 | 2483.539 | -63.66 | / | -16 | Pass |
| 2496.5 | 12500 | 1 | 1 | 5201.000 | -52.38 | / | -26 | Pass |

2M_2480MHz_Ant1_NTNV

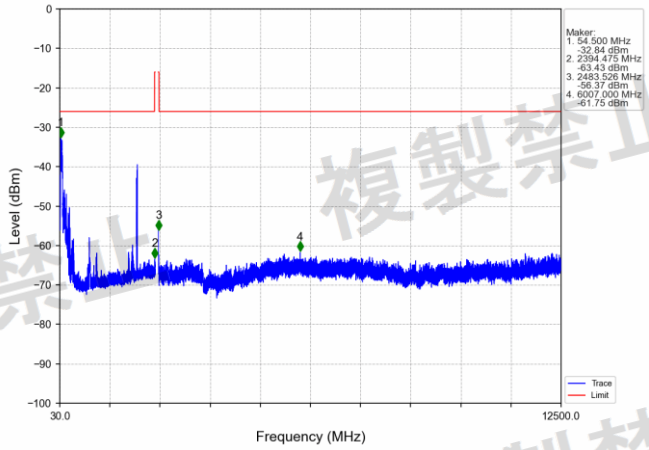


2M_2480MHz_Ant1_NTNV

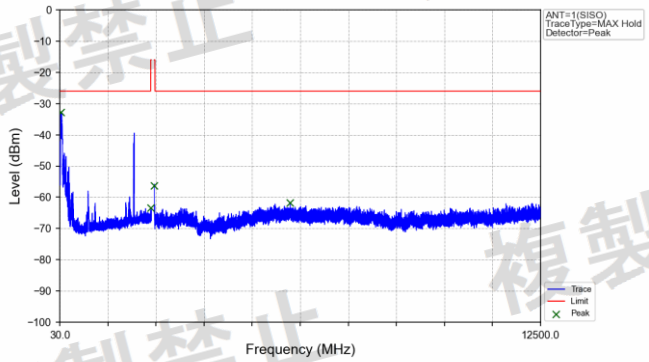


| Start (MHz) | Stop (MHz) | RBW (MHz) | VBW (MHz) | Freq (MHz) | PK Power (dBm) | AV Power (dBm) | Limit (dBm) | Result |
|---|---|---|---|---|---|---|---|---|
| 30 | 2387 | 1 | 1 | 54.500 | -32.84 | / | -26 | Pass |
| 2387 | 2400 | 1 | 1 | 2394.475 | -63.43 | / | -16 | Pass |
| 2483.5 | 2496.5 | 1 | 1 | 2483.526 | -56.37 | / | -16 | Pass |
| 2496.5 | 12500 | 1 | 1 | 6007.000 | -61.75 | / | -26 | Pass |

## 6. SECONDARY RADIATED EMISSION

### 6.1 Test Result

#### 6.1.1 RxSe_NTNV

| NTNV | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Mode | TX Type | Freq. (MHz) | ANT | Freq. Range | | Marker | | | | | Limit (nW) | Verdict |
| | | | | Start (MHz) | Stop (MHz) | Freq. (MHz) | PK Power (dBm) | PK Power (nW) | AV Power (dBm) | AV Power (nW) | | |
| 1M | SISO | 2402 | 1 | 30 | 1000 | 847.7 | -76.50 | 0.022 | / | / | 4 | Pass |
| | | | | 1000 | 12500 | 5636 | -61.19 | 0.760 | / | / | 20 | Pass |
| | | 2480 | 1 | 30 | 1000 | 941.6 | -76.93 | 0.020 | / | / | 4 | Pass |
| | | | | 1000 | 12500 | 6034 | -60.46 | 0.899 | / | / | 20 | Pass |
| 2M | SISO | 2402 | 1 | 30 | 1000 | 843.5 | -76.88 | 0.021 | / | / | 4 | Pass |
| | | | | 1000 | 12500 | 5648.5 | -61.08 | 0.780 | / | / | 20 | Pass |
| | | 2480 | 1 | 30 | 1000 | 922.8 | -76.49 | 0.022 | / | / | 4 | Pass |
| | | | | 1000 | 12500 | 6767.5 | -61.09 | 0.778 | / | / | 20 | Pass |

複製禁止

6.2 Test Graph

6.2.1 RxSe_NTNV

1M_2402MHz_Ant1_NTNV

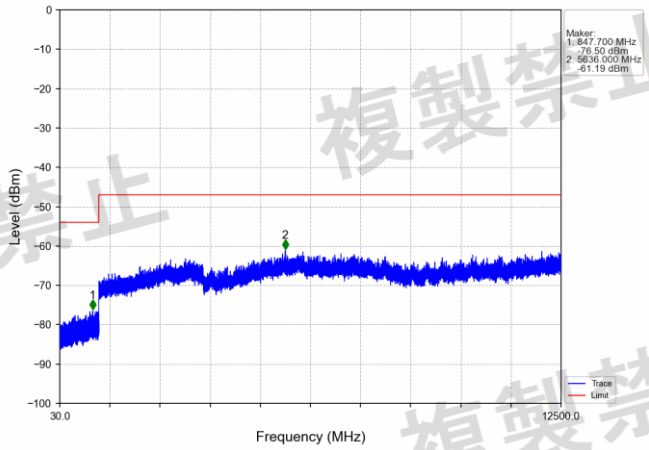


1M_2402MHz_Ant1_NTNV

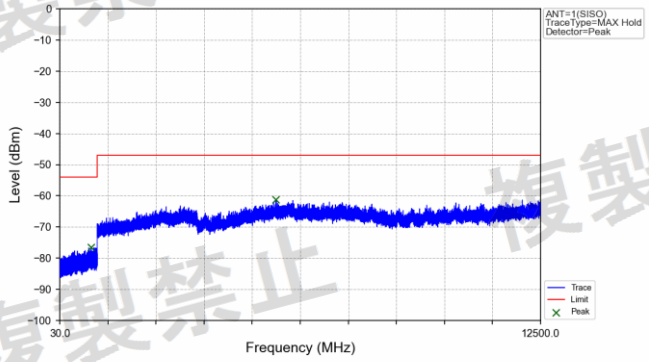


| Start (MHz) | Stop (MHz) | RBW (MHz) | VBW (MHz) | Freq (MHz) | PK Power (dBm) | AV Power (dBm) | Limit (dBm) | Result |
|---|---|---|---|---|---|---|---|---|
| 30 | 1000 | 0.1 | 0.1 | 847.700 | -76.50 | / | -54 | Pass |
| 1000 | 12500 | 1 | 1 | 5636.000 | -61.19 | / | -47 | Pass |

1M_2480MHz_Ant1_NTNV

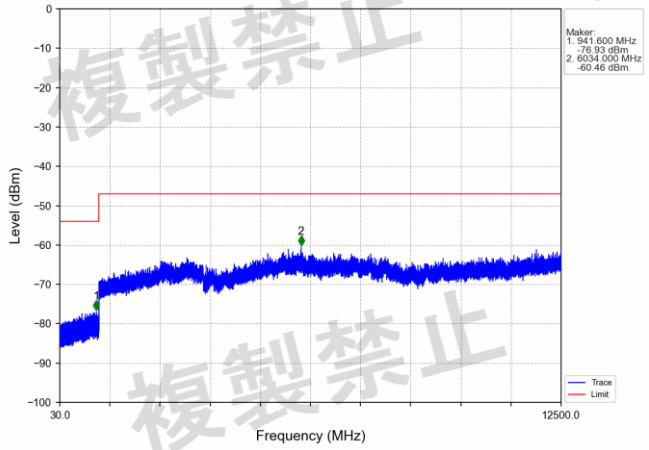

1M_2480MHz_Ant1_NTNV

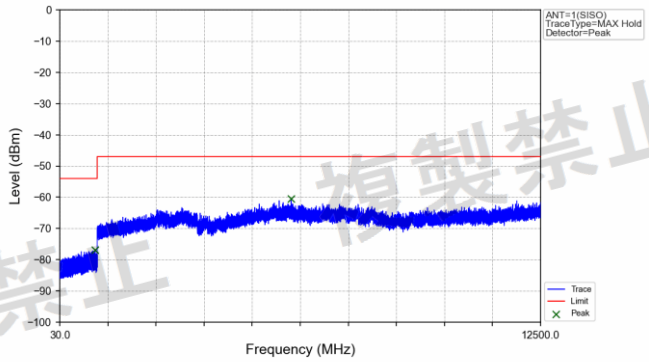


| Start (MHz) | Stop (MHz) | RBW (MHz) | VBW (MHz) | Freq (MHz) | PK Power (dBm) | AV Power (dBm) | Limit (dBm) | Result |
|---|---|---|---|---|---|---|---|---|
| 30 | 1000 | 0.1 | 0.1 | 941.600 | -76.93 | / | -54 | Pass |
| 1000 | 12500 | 1 | 1 | 6034.000 | -60.46 | / | -47 | Pass |

2M_2402MHz_Ant1_NTNV

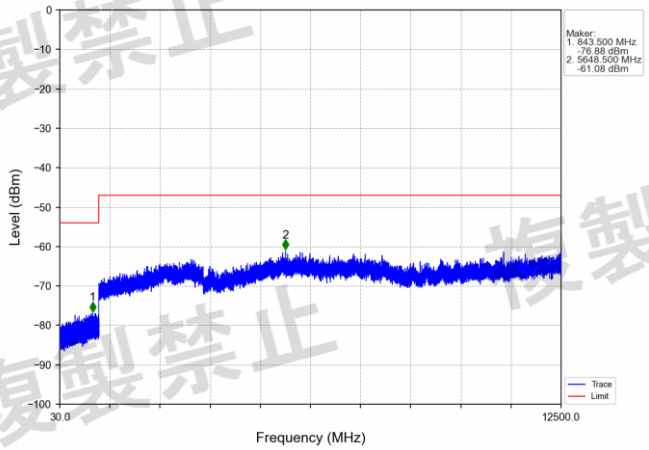


2M_2402MHz_Ant1_NTNV

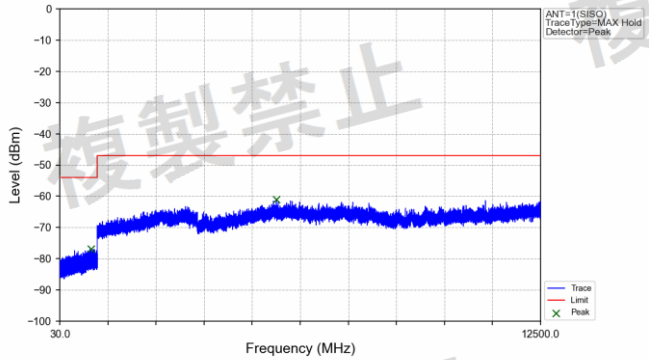


| Start (MHz) | Stop (MHz) | RBW (MHz) | VBW (MHz) | Freq (MHz) | PK Power (dBm) | AV Power (dBm) | Limit (dBm) | Result |
|---|---|---|---|---|---|---|---|---|
| 30 | 1000 | 0.1 | 0.1 | 843.500 | -76.88 | / | -54 | Pass |
| 1000 | 12500 | 1 | 1 | 5648.500 | -61.08 | / | -47 | Pass |

2M_2480MHz_Ant1_NTNV

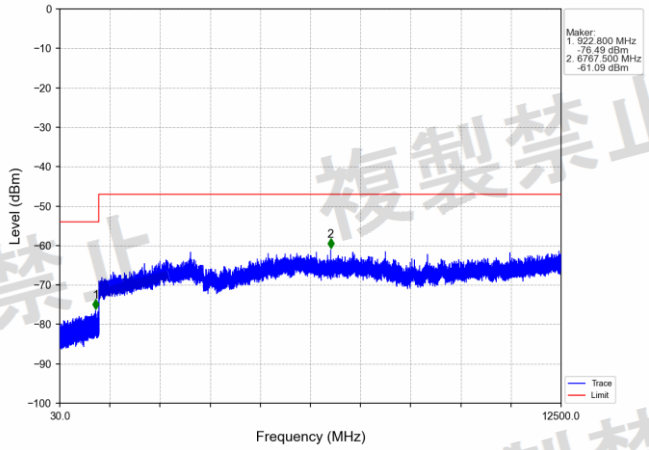


2M_2480MHz_Ant1_NTNV

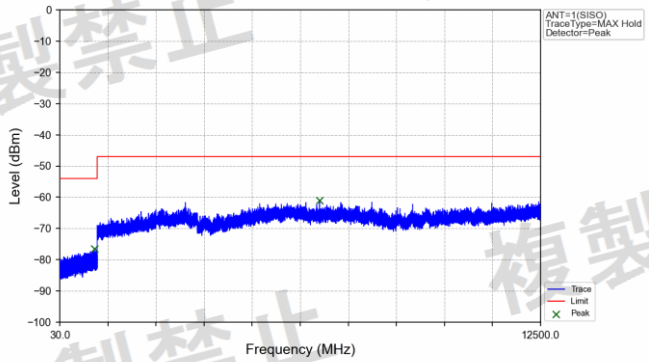


| Start (MHz) | Stop (MHz) | RBW (MHz) | VBW (MHz) | Freq (MHz) | PK Power (dBm) | AV Power (dBm) | Limit (dBm) | Result |
|---|---|---|---|---|---|---|---|---|
| 30 | 1000 | 0.1 | 0.1 | 922.800 | -76.49 | / | -54 | Pass |
| 1000 | 12500 | 1 | 1 | 6767.500 | -61.09 | / | -47 | Pass |

# APPENDIX II - TEST SETUP PHOTOS

## APPENDIX III - PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS

Note: Please see the attached AURA S_EUT Photos.

※※※※※END OF THE REPORT※※※※※