

Prüfbericht-Nr.: Test report no.:	CN26NHPF 002	Auftrags-Nr.: Order no.:	27243155	Seite 1 von 27 Page 1 of 27
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2026-01-24	
Auftraggeber: Client:	Shining 3D Tech Co., Ltd. No. 1398 Xiangbin Road, Wenyan Street, Xiaoshan District, Hangzhou, Zhejiang, 311258, P.R China			
Prüfgegenstand: Test item:	3D Printer			
Bezeichnung / Typ-Nr.: Identification / Type no.:	Ceramix-Nano			
Auftrags-Inhalt: Order content:	Test Report			
Prüfgrundlage: Test specification:	Article 2 Section 1 Item 19-3			
Wareneingangsdatum: Date of sample receipt:	2026-04-01			
Prüfmuster-Nr.: Test sample no.:	A004240480-001 A004243109-001-003			
Prüfzeitraum: Testing period:	2026-06-18 - 2026-06-22			
Ort der Prüfung: Place of testing:	Shenzhen PSI Testing Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:			genehmigt von: authorized by:	
Datum: Date: 2026-07-13	Signed by: Breeze Jiang		Ausstellungsdatum: Issue date: 2026-07-13	Signed by: Bell Hu
Stellung / Position:	Sachverständige(r)/Expert		Stellung / Position:	Sachverständige(r)/Expert
Sonstiges / Other:	This report is for 5.2GHz Wi-Fi.			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet			
* Legend:	P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested			
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

Prüfbericht-Nr.: CN26NHPF 002
Test report no.:

Seite 2 von 27
Page 2 of 27

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TÜV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TÜV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Prüfbericht - Nr.: CN26NHPF 002
Test Report No.:

Seite 3 von 27
Page 3 of 27

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2	TEST SITES	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	UNCERTAINTY OF MEASUREMENT	6
3	GENERAL PRODUCT INFORMATION	7
3.1	PRODUCT FUNCTION AND INTENDED USE.....	7
3.2	RATINGS AND SYSTEM DETAILS	7
3.3	ANTENNA SPECIFICATIONS.....	8
3.3.1	Antenna Gain	8
3.3.2	Antenna Pattern	8
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	8
3.5	SUBMITTED DOCUMENTS.....	8
4	TEST SET-UP AND OPERATION MODES	9
4.1	PRINCIPLE OF CONFIGURATION SELECTION	9
4.2	TEST OPERATION AND TEST SOFTWARE.....	9
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	9
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	9
5	TEST RESULTS	10
5.1	FREQUENCY TOLERANCE MEASUREMENT	10
5.1.1	Limits of Frequency Tolerance Measurement.....	10
5.1.2	Test Setup	10
5.1.3	Condition of Measuring Instrument	10
5.1.4	Condition of Test Equipment.....	10
5.1.5	Measurement procedure	10
5.1.6	Test Results	10
5.2	OCCUPIED BANDWIDTH MEASUREMENT (99% POWER BANDWIDTH).....	11
5.2.1	Limits of Occupied Bandwidth Measurement.....	11
5.2.2	Test Setup	11
5.2.3	Measuring Instrument Conditions	11
5.2.4	Test Results	11
5.3	SPURIOUS EMISSIONS FOR TRANSMITTER MEASUREMENT	12
5.3.1	Limits of Spurious Emissions	12
5.3.2	Test Setup	13
5.3.3	Conditions of the measuring instrument.....	13
5.3.4	Test Results	13
5.4	OUT-BAND LEAKAGE POWER	14
5.4.1	Limits of Out-Band Leakage Power (EIRP)	14
5.4.2	Test Setup	16
5.4.3	Conditions of the measuring instrument.....	16
5.4.4	Test Results	17

Prüfbericht - Nr.: CN26NHPF 002
Test Report No.:

Seite 4 von 27
Page 4 of 27

5.5	ADJACENT CHANNEL LEAKAGE POWER	18
5.5.1	Limits of Adjacent Channel Leakage Power	18
5.5.2	Test Setup	18
5.5.3	Test Results	18
5.6	ANTENNA POWER MEASUREMENT	19
5.6.1	Limits of Antenna Power	19
5.6.2	Test Setup	19
5.6.3	Condition of Measuring Instrument	19
5.6.4	Condition of Test Equipment	20
5.6.5	Measurement Procedure	20
5.6.6	Test Results	21
5.7	SPURIOUS EMISSIONS FOR RECEIVER	22
5.7.1	Limits of Spurious Emissions for Receiver	22
5.7.2	Test Setup	22
5.7.3	Measurement Procedure	22
5.7.4	Test Results	22
5.8	BURST LENGTH	23
5.8.1	Limits of Burst Length	23
5.8.2	Test Setup	23
5.8.3	Measuring instrument conditions, etc.	23
5.8.4	Test Results	23
5.9	INTERFERENCE PREVENTION FUNCTION	24
5.9.1	Limits of Interference Prevention Function	24
5.9.2	Test Setup	24
5.9.3	Condition of Measuring Instrument	24
5.9.4	Measurement procedure	24
5.9.5	How to describe test results	24
5.9.6	Test Results	24
5.10	CARRIER SENSING	25
5.10.1	Test Setup	25
5.10.2	Measurement procedure	25
5.10.3	Test Results	25
6	PHOTOGRAPHS OF THE TEST CONFIGURATION	26
7	LIST OF TABLES	27
8	LIST OF PHOTOGRAPHS	27

Prüfbericht - Nr.: CN26NHPF 002
Test Report No.:

Seite 5 von 27
Page 5 of 27

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:
Appendix A: Test result of 5.2GHz Band Wi-Fi.

Prüfbericht - Nr.: **CN26NHPF 002**
Test Report No.:

Seite 6 von 27
Page 6 of 27

2 Test Sites

2.1 Test Facilities

Shenzhen PSI Testing Co., Ltd.

1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road, Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104
A2LA Certificate Number: 6975.01
CNAS Registration Number: CNAS L19010

The tests at the test sites have been conducted under the supervision of a TÜV engineer.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

JRF							
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until	Calibration Body	Calibration Method*
Spectrum analyzer	Agilent	N9020A	MY51281067	2025.12.18	2026.12.17	CCIC*	c
RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.02-1111533-Fz	2025.12.18	2026.12.17	CCIC	c
Vector Signal Generator	Agilent	N5182A	MY47420724	2025.12.18	2026.12.17	CCIC	c

Calibration Method:

- a) Calibration conducted by the National Institute of Information and Communications Technology (NICT) (hereinafter referred to as "NICT") or a designated calibration agency under Article 102-18 paragraph (1)
- b) Correction conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Law (Law No. 51 of 1992)
- c) Calibration conducted in foreign countries, which shall be equivalent to the calibration conducted by the NICT or a designated calibration agency under Article 102-18 paragraph (1)
- d) Calibration conducted by using measuring instruments and other equipment listed in the right column of Table No. 3 attached hereto, which shall have been given any of calibration, etc. listed above from a) to c)

* China Certification & Inspection (Group) Co., Ltd. (CCIC)

2.3 Uncertainty of Measurement

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Table 2: Measurement Uncertainty

Parameter	Uncertainty
Uncertainty for Radio Frequency	48.24KHz
Uncertainty for Conducted RF Power	0.41dB
Uncertainty for Power Spectral Density	0.39 dB
Occupied-Bandwidth	968Hz
Conducted-Spurious Emission	1.26dB

Prüfbericht - Nr.: **CN26NHPF 002**
Test Report No.:

Seite 7 von 27
Page 7 of 27

3 General Product Information

3.1 Product Function and Intended Use

The product is 3D Printer. It supports 5GHz Wi-Fi and 2.4GHz Wi-Fi functions.
This report is for 5GHz Wi-Fi operation.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Description
Kind of Equipment:	3D Printer
Type Designation:	Ceramix-Nano
Trademark:	SHINING 3D
Operating Voltage:	DC 20V Via AC/DC Adapter
Operating Temperature Range:	+18 °C ~ +32 °C
Adapter:	Manufacturer: Yingyuan Power Supply(suzhou) Co, Ltd. Model: TYPE-C1001C Input: 100-240V AC Output: DC 20V/50A, 100W Max
Hardware release No.:	V1.3
Software release No.:	4.1.80.108
MIC ID:	201-260500
Technical Specification of 5GHz Wi-Fi	
Characteristic	Description
Operating Frequency:	5180-5240MHz
Protocol:	802.11 a/n20/n40/ac20/ac40/ac80
Type of Modulation:	OFDM, OFDMA
Channel Number:	7 channels
Data Rate:	6/9/12/18/24/36/48/54 Mbps for 802.11a MCS0~MCS7 for 802.11n MCS0~MCS9 for 802.11ac (All data rates considered, only the Worst-cases reported.)
Channel Separation:	20MHz, 40MHz, 80MHz
Antenna Type:	Integral Antenna
Antenna Number:	2Tx2Rx
Antenna Gain:	3.15dBi for Antenna 1; 2.03dBi for Antenna 2; (Provided by the Client)
Rated RF output power:	Please refer to Note 1
Conducted RF output power:	Please refer to Note 1
EIRP output power:	Please refer to Note 1

Note: The correctness of all data provided by customer in the test report is ensured and responsible of the customer. Any misjudgment of the test results caused by the use of incorrect data provided by customer shall be borne by the customer.

Prüfbericht - Nr.: CN26NHPF 002
Test Report No.:

Seite 8 von 27
Page 8 of 27

Note 1: The power table as below table:

5.2GHz Wi-Fi			
Mode	Rated power density (mW/MHz)	Conducted power density (mW/MHz)	EIRP power density (mW/MHz)
802.11 a	3.00	1.959	4.05
802.11n (HT20)	3.00	2.844	5.87
802.11n (HT40)	1.50	0.776	1.60
802.11ac (VHT20)	3.00	2.518	5.20
802.11ac (VHT40)	1.50	0.879	1.82
802.11ac (VHT80)	1.00	0.479	0.99

Table 4: RF Channel and Frequency of 5.2GHz Wi-Fi

5.2GHz Wi-Fi					
20MHz Bandwidth		40MHz Bandwidth		80MHz Bandwidth	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

3.3 Antenna Specifications

3.3.1 Antenna Gain

Ant. Type	Connector Type	Highest Peak Gain (dBi) 5.15GHz ~ 5.25GHz
Integral Antenna	N/A	3.15dBi for Antenna 1; 2.03dBi for Antenna 2

3.3.2 Antenna Pattern

Please refer to the attached file (Antenna report).

3.4 Noise Generating and Noise Suppressing Parts

For details refer to the Circuit Diagram.

3.5 Submitted Documents

- Application Form
- User Manual
- Operation Description
- Rating Label

Prüfbericht - Nr.: CN26NHPF 002
Test Report No.:

Seite 9 von 27
Page 9 of 27

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5 and chapter 6.

According to clause 3.1, all tests were performed on model *Ceramix-Nano* in this report.

The RF circuits are located inside of the EUT. The RF circuit was covered by metal shielding case, also it won't be easy to be opened. Frequency Band, channels and modulation parameters are fixed inside the module. They cannot be edited or modified by end-user.

Table 5: Test Conditions

Test conditions	Unit
Voltage _{normal}	3.3V dc
Voltage _{max}	3.3V dc
Voltage _{min}	3.3V dc
Temperature	24 deg.C
Humidity	56 %

Note: During the input supply voltage to the EUT from the external power source is varied by +/- 10%, if output voltage had been confirmed that the fluctuation of power supply to the RF circuit of EUT (excluding power source) is equal to or less than +/-1%. Exempt extremely high and low supply voltage condition test, EUT only operated in normal voltage to test all regulations.

4.3 Special Accessories and Auxiliary Equipment

Table 6: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	S/N
Laptop	hp	--	--

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

Prüfbericht - Nr.: CN26NHPF 002
Test Report No.:

Seite 10 von 27
Page 10 of 27


5 Test Results

5.1 Frequency Tolerance Measurement

5.1.1 Limits of Frequency Tolerance Measurement

Tolerance of frequency shall be +/- 20ppm.

5.1.2 Test Setup



5.1.3 Condition of Measuring Instrument

- (1) As a frequency meter, use a frequency counter or spectrum analyzer (with a synthesizer type local oscillator).
- (2) The measurement accuracy of the frequency meter shall be 1/10 or less of the allowable value specified in the Equipment Regulations.
- (3) When measuring burst waves, set the gate open time to the time that allows the entire burst section to be measured.

5.1.4 Condition of Test Equipment

- (1) Set the test frequency and transmit.
- (2) Stop modulation and continuously transmit non-modulated waves. However, if modulation is stopped and continuous transmission of unmodulated waves cannot be performed, continuous burst transmission of unmodulated waves or a modulation state that produces a characteristic frequency spectrum whose frequency can be measured by a spectrum analyzer is used.

5.1.5 Measurement procedure

- (1) In the case of unmodulated waves (continuous or continuous burst), measure directly with a frequency meter.
- (2) In the case of burst waves, measure for the time period when sufficient accuracy is obtained, calculate the average value, and use it as the measured value.
- (3) If the test mode produces a characteristic frequency spectrum, measure the frequency of that spectrum with a spectrum analyzer.

5.1.6 Test Results

Result

PASS

For the measurement records, refer to the appendix A.

Remark: This testing was carried out on all operation modes, but only the worst case was presented in this report.

Prüfbericht - Nr.: **CN26NHPF 002**
Test Report No.:

Seite 11 von 27
Page 11 of 27

5.2 Occupied Bandwidth Measurement (99% Power Bandwidth)

5.2.1 Limits of Occupied Bandwidth Measurement

Item	Bandwidth	Limit	Remark
Occupied bandwidth	20MHz	≤20MHz	W52/W53/W56
Occupied bandwidth	40MHz	≤40MHz	W52/W53/W56
Occupied bandwidth	80MHz	≤80MHz	W52/W53/W56

5.2.2 Test Setup



5.2.3 Measuring Instrument Conditions

Set the spectrum analyzer as follows.

Center frequency: Test frequency

Sweep frequency width From about 2 times to about 3.5 times the allowable value specified in the equipment regulations

Resolution bandwidth: 3% or less of the allowable value specified in the equipment regulations

Video bandwidth: Same as resolution bandwidth

Input level: The level at which the carrier wave level can be measured without being affected by the noise level of the spectrum analyzer.

Sweep time: Minimum time for guaranteed measurement accuracy
(In the case of burst waves, when more than 1 burst per sample)

Sweep mode: Continuous sweep

Detection mode: Positive peak (Note)

Display mode: Max hold (Note)

Note: For OFDM and other than burst waves, the following shall apply.

Average processing times 10 times or more

Detection mode sample

5.2.4 Test Results

Result **PASS**

For the measurement records, refer to the appendix A.

Remark: This testing was carried out on all operation modes, but only the worst case was presented in this report.

Prüfbericht - Nr.: **CN26NHPF 002**
Test Report No.:

Seite 12 von 27
Page 12 of 27

5.3 Spurious Emissions for Transmitter Measurement

5.3.1 Limits of Spurious Emissions

W52 & W53, 20MHz

Frequencies (MHz)	Limit
OBW $\leq$ 18MHz	
30.0MHz to 1000.0MHz	$\leq 0.25 \text{ uW/100kHz}$
1000.0MHz to 5140.0MHz	$\leq 2.5 \text{ uW/MHz}$
5360.0MHz to 26000.0MHz	$\leq 2.5 \text{ uW/MHz}$
18MHz < OBW < 20MHz	
30.0MHz to 1000.0MHz	$\leq 0.25 \text{ uW/100kHz}$
1000.0MHz to 5135.0MHz	$\leq 2.5 \text{ uW/MHz}$
5365.0MHz to 26000.0MHz	$\leq 2.5 \text{ uW/MHz}$

W52 & W53, 40MHz

Frequencies (MHz)	Limit
30.0MHz ~ 1000.0MHz	$\leq 0.25 \text{ uW/100kHz}$
1000.0MHz ~ 5100.0MHz	$\leq 2.5 \text{ uW/MHz}$
5400.0MHz ~ 26000.0MHz	$\leq 2.5 \text{ uW/MHz}$

W52 & W53, 80MHz

Frequencies (MHz)	Limit
30.0MHz ~ 1000.0MHz	$\leq 0.25 \text{ uW/100kHz}$
1000.0MHz ~ 5020.0MHz	$\leq 2.5 \text{ uW/MHz}$
5480.0MHz ~ 26000.0MHz	$\leq 2.5 \text{ uW/MHz}$

W56, 20MHz

Frequencies (MHz)	Limit
30.0MHz to 1000.0MHz	$\leq 0.25 \text{ uW/100kHz}$
1000.0MHz ~ 5455.0MHz	$\leq 2.5 \text{ uW/MHz}$
5745.0MHz ~ 26000.0MHz	$\leq 2.5 \text{ uW/MHz}$

W56, 40MHz

Frequencies (MHz)	Limit
30.0MHz to 1000.0MHz	$\leq 0.25 \text{ uW/100kHz}$
1000.0MHz ~ 5420.0MHz	$\leq 2.5 \text{ uW/MHz}$
5760.0MHz ~ 26000.0MHz	$\leq 2.5 \text{ uW/MHz}$


W56, 80MHz

Frequencies (MHz)	Limit
30.0MHz to 1000.0MHz	$\leq 0.25 \text{ uW/100kHz}$
1000.0MHz ~ 5340.0MHz	$\leq 2.5 \text{ uW/MHz}$
5800.0MHz ~ 26000.0MHz	$\leq 2.5 \text{ uW/MHz}$

Prüfbericht - Nr.: CN26NHPF 002
Test Report No.:

Seite 13 von 27
Page 13 of 27

5.3.2 Test Setup



5.3.3 Conditions of the measuring instrument

- (1) The spectrum analyzer when searching for **unwanted emissions** is set as follows.

Sweep frequency width	30MHz to 26GHz (Note)
Resolution bandwidth	1MHz
Video bandwidth	Same as resolution bandwidth
Y-axis scale	10dB/Div
Input level	Maximum dynamic range value
Sweep time	The minimum time for which measurement accuracy is guaranteed (in the case of burst waves, it can be longer than the time obtained by "(sweep frequency width (MHz))/resolution bandwidth (MHz)) × burst period (s)". It can be longer than the time required
Number of data points	400 or more data points
Sweep mode	Single sweep
Detection mode	positive peak
- (2) Set the spectrum analyzer as follows when measuring unwanted emission amplitude.

Center frequency	Unwanted emission frequency (searched frequency)
Sweep frequency width	0Hz
Resolution bandwidth	1MHz
Video bandwidth	Same as resolution bandwidth
Y-axis scale	10dB/Div
Input level	Maximum dynamic range value
Sweep time	The minimum time for which the measurement accuracy is guaranteed (in the case of burst waves, the duration of one burst or more)
Number of data points	400 or more data points
Sweep mode	Single sweep
Detection mode	sample

6 Others

- (1) In 2(2), the detection mode of the spectrum analyzer at the time of amplitude measurement can use RMS (referred to as the true value of power) instead of sampling.
- (2) In (1), if the burst time rate (Note) of unwanted emission is obtained for each unwanted emission frequency, the sweep frequency width can be set to about 10 MHz in (2).

Note: Burst time rate = time during which radio waves are emitted/burst period

5.3.4 Test Results

Result **PASS**

For the measurement records, refer to the appendix A.

Remark: This testing was carried out on all operation modes, but only the worst case was presented in this report.

Prüfbericht - Nr.: **CN26NHPF 002**
Test Report No.:

Seite 14 von 27
Page 14 of 27

5.4 Out-Band Leakage Power

5.4.1 Limits of Out-Band Leakage Power (EIRP)

W52, 20MHz

Frequencies (MHz)	Limit
OBW $\leq$ 18MHz	
$5140.0 \leq f_o \leq 5142.0\text{MHz}$	$\leq 2.5 \text{ uW/MHz}$
$5142.0 < f_o \leq 5150.0\text{MHz}$	$\leq 15.0 \text{ uW/MHz}$
$5250.0 \leq f_o < 5251.0\text{MHz}$	$\leq 10.0^{1-(f-9)} \text{ mW/MHz}$
$5251.0 \leq f_o < 5260.0\text{MHz}$	$\leq 10.0^{1-(8/90)(f-11)} \text{ mW/MHz}$
$5260.0 \leq f_o < 5266.7\text{MHz}$	$\leq 10.0^{-1.8-(6/50)(f-20)} \text{ mW/MHz}$
$5266.7 \leq f_o \leq 5360.0\text{MHz}$	$\leq 2.5 \text{ uW/MHz}$
18MHz < OBW < 19MHz	
$5135.0 \leq f_o \leq 5142.0\text{MHz}$	$\leq 2.5 \text{ uW/MHz}$
$5142.0 < f_o \leq 5150.0\text{MHz}$	$\leq 15.0 \text{ uW/MHz}$
$5250.0 \leq f_o < 5251.0\text{MHz}$	$\leq 10.0^{1-(f-9)} \text{ mW/MHz}$
$5251.0 \leq f_o < 5260.0\text{MHz}$	$\leq 10.0^{1-(8/90)(f-11)} \text{ mW/MHz}$
$5260.0 \leq f_o < 5266.7\text{MHz}$	$\leq 10.0^{-1.8-(6/50)(f-20)} \text{ mW/MHz}$
$5266.7 \leq f_o \leq 5365.0\text{MHz}$	$\leq 2.5 \text{ uW/MHz}$

W52, 40MHz

Frequencies (MHz)	Limit
$5100.0 \leq f_o \leq 5141.6\text{MHz}$	$\leq 2.5 \text{ uW/MHz}$
$5141.6 < f_o \leq 5150.0\text{MHz}$	$\leq 15.0 \text{ uW/MHz}$
$5250.0 \leq f_o < 5251.0\text{MHz}$	$\leq 10.0^{-(f-20)+\log(1/2)} \text{ mW/MHz}$
$5251.0 \leq f_o < 5270.0\text{MHz}$	$\leq 10.0^{-(8/190)(f-21)-1+\log(1/2)} \text{ mW/MHz}$
$5270.0 \leq f_o < 5278.4\text{MHz}$	$\leq 10.0^{-(3/50)(f-40)-1.8+\log(1/2)} \text{ mW/MHz}$
$5278.4 \leq f_o \leq 5400.0\text{MHz}$	$\leq 2.5 \text{ uW/MHz}$

W52, 80MHz

Frequencies (MHz)	Limit
$5020.0 \leq f_o \leq 5123.2\text{MHz}$	$\leq 2.5 \text{ uW/MHz}$
$5123.2 < f_o \leq 5150.0\text{MHz}$	$\leq 15.0 \text{ uW/MHz}$
$5250.0 \leq f_o < 5251.0\text{MHz}$	$\leq 10.0^{-(f-40)+\log(1/4)} \text{ mW/MHz}$
$5251.0 \leq f_o < 5290.0\text{MHz}$	$\leq 10.0^{-(8/390)(f-41)-1+\log(1/4)} \text{ mW/MHz}$
$5290.0 \leq f_o < 5296.7\text{MHz}$	$\leq 10.0^{-(3/100)(f-80)-1.8+\log(1/4)} \text{ mW/MHz}$
$5296.7 \leq f_o \leq 5480.0\text{MHz}$	$\leq 2.5 \text{ uW/MHz}$

Prüfbericht - Nr.: CN26NHPF 002
Test Report No.:

Seite 15 von 27
Page 15 of 27

W53, 20MHz

Frequencies (MHz)	Limit
OBW $\leq$ 18MHz	
$5140.0 \leq f_o \leq 5233.3\text{MHz}$	$\leq 2.5 \mu\text{W/MHz}$
$5233.3 < f_o \leq 5240.0\text{MHz}$	$\leq 10.0^{-1.8-(6/50)(f-20)}\text{mW/MHz}$
$5240.0 < f_o \leq 5249.0\text{MHz}$	$\leq 10.0^{-1-(8/90)(f-11)}\text{mW/MHz}$
$5249.0 < f_o \leq 5250.0\text{MHz}$	$\leq 10.0^{1-(f-9)}\text{mW/MHz}$
$5350.0 \leq f_o \leq 5360.0\text{MHz}$	$\leq 2.5 \mu\text{W/MHz}$
18MHz < OBW < 19MHz	
$5135.0 \leq f_o \leq 5233.3\text{MHz}$	$\leq 2.5 \mu\text{W/MHz}$
$5233.3 < f_o \leq 5240.0\text{MHz}$	$\leq 10.0^{-1.8-(6/50)(f-20)}\text{mW/MHz}$
$5240.0 < f_o \leq 5249.0\text{MHz}$	$\leq 10.0^{-1-(8/90)(f-11)}\text{mW/MHz}$
$5249.0 < f_o \leq 5250.0\text{MHz}$	$\leq 10.0^{1-(f-9)}\text{mW/MHz}$
$5350.0 \leq f_o \leq 5365.0\text{MHz}$	$\leq 2.5 \mu\text{W/MHz}$

W53, 40MHz

Frequencies (MHz)	Limit
$5100.0 \leq f_o \leq 5210.0\text{MHz}$	$\leq 2.5 \mu\text{W/MHz}$
$5210.0 < f_o \leq 5221.6\text{MHz}$	$\leq 2.5 \mu\text{W/MHz}$
$5221.6 < f_o \leq 5230.0\text{MHz}$	$\leq 10.0^{-(3/50)(f-40)-1.8+\log(1/2)}\text{mW/MHz}$
$5230.0 < f_o \leq 5249.0\text{MHz}$	$\leq 10.0^{-(8/190)(f-21)-1+\log(1/2)}\text{mW/MHz}$
$5249.0 < f_o \leq 5250.0\text{MHz}$	$\leq 10.0^{-(f-20)+\log(1/2)}\text{mW/MHz}$
$5350.0 \leq f_o < 5358.4\text{MHz}$	$\leq 15 \mu\text{W/MHz}$
$5358.4 \leq f_o \leq 5400.0\text{MHz}$	$\leq 2.5 \mu\text{W/MHz}$

W53, 80MHz

Frequencies (MHz)	Limit
$5020.0 \leq f_o \leq 5203.3\text{MHz}$	$\leq 2.5 \mu\text{W/MHz}$
$5203.3 < f_o \leq 5210.0\text{MHz}$	$\leq 10.0^{-(3/100)(f-80)-1.8+\log(1/4)}\text{mW/MHz}$
$5210.0 < f_o \leq 5249.0\text{MHz}$	$\leq 10.0^{-(8/390)(f-41)-1+\log(1/4)}\text{mW/MHz}$
$5249.0 < f_o \leq 5250.0\text{MHz}$	$\leq 10.0^{-(f-40)+\log(1/4)}\text{mW/MHz}$
$5350.0 \leq f_o < 5376.8\text{MHz}$	$\leq 15 \mu\text{W/MHz}$
$5376.8 \leq f_o \leq 5480.0\text{MHz}$	$\leq 2.5 \mu\text{W/MHz}$

W56, 20MHz

Frequencies (MHz)	Limit
$5455 \leq f_o \leq 5460\text{MHz}$	$\leq 2.5 \mu\text{W/MHz}$
$5460 < f_o \leq 5470\text{MHz}$	$\leq 12.5 \mu\text{W/MHz}$
$5725 \leq f_o < 5740\text{MHz}$	$\leq 12.5 \mu\text{W/MHz}$
$5740 \leq f_o \leq 5745\text{MHz}$	$\leq 2.5 \mu\text{W/MHz}$

Prüfbericht - Nr.: CN26NHPF 002
Test Report No.:

Seite 16 von 27
Page 16 of 27


W56, 40MHz

Frequencies (MHz)	Limit
$5420 \leq f_o \leq 5460\text{MHz}$	$\leq 12.5 \mu\text{W/MHz}$
$5460 < f_o \leq 5470\text{MHz}$	$\leq 50 \mu\text{W/MHz}$
$5725 \leq f_o \leq 5760\text{MHz}$	$\leq 12.5 \mu\text{W/MHz}$

W56, 80MHz

Frequencies (MHz)	Limit
$5340 \leq f_o \leq 5460\text{MHz}$	$\leq 12.5 \mu\text{W/MHz}$
$5460 < f_o \leq 5469.5\text{MHz}$	$\leq 50 \mu\text{W/MHz}$
$5469.5 < f_o \leq 5470\text{MHz}$	$\leq 51.2 \mu\text{W/MHz}$
$5725 \leq f_o \leq 5800\text{MHz}$	$\leq 12.5 \mu\text{W/MHz}$

5.4.2 Test Setup



5.4.3 Conditions of the measuring instrument

- (1) Use a carrier suppression filter as necessary.
- (2) The settings of the spectrum analyzer when searching for spurious are as follows.

Sweep frequency width	Search for spurious from the lowest possible frequency to three times or more of the carrier frequency.
Resolution bandwidth	100 kHz below 1 GHz, 1 MHz above 1 GHz
Video bandwidth	Same as resolution bandwidth
Y-axis scale	10dB/Div
Input level	Maximum dynamic range value
Sweep time	Minimum time for guaranteed measurement accuracy
Number of data points	400 or more data points
Sweep mode	Single sweep
Detection mode	positive peak
- (3) Set the spectrum analyzer for spurious measurement as follows.

Center frequency	Searched spurious frequency
Sweep frequency	0Hz
Resolution bandwidth	10 kHz below 30 MHz, 100 kHz between 30 MHz and 1 GHz, 1 MHz above 1 GHz
Video bandwidth	Same as resolution bandwidth
Y-axis scale	10dB/Div
Input level	Set the amplitude of the carrier wave near the maximum in the linear region of the mixer.
Sweep time	Minimum time for guaranteed measurement accuracy
Number of data points	400 or more data points
Sweep mode	Single sweep
Detection mode	sample

Prüfbericht - Nr.: CN26NHPF 002
Test Report No.:

Seite 17 von 27
Page 17 of 27

5.4.4 Test Results

Result **PASS**

For the measurement records, refer to the appendix A.

Remark: This testing was carried out on all operation modes, but only the worst case was presented in this report.

Prüfbericht - Nr.: **CN26NHPF 002**
Test Report No.:

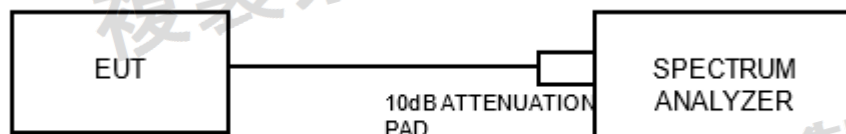
Seite 18 von 27
Page 18 of 27

5.5 Adjacent Channel Leakage Power

5.5.1 Limits of Adjacent Channel Leakage Power

Adjacent Channel Power Limit
(BWch 20MHz & CP/OBW ≤ 18MHz) - $f_c \pm 20\text{MHz} \geq 25\text{dB}$; $f_c \pm 40\text{MHz} \geq 40\text{dB}$
(BWch 20MHz & CP/OBW ≤ 19MHz) - $f_c \pm 20\text{MHz} \geq 25\text{dB}$; $f_c \pm 40\text{MHz} \geq 40\text{dB}$
(BWch 40MHz & CP/OBW ≤ 38MHz) - $f_c \pm 40\text{MHz} \geq 25\text{dB}$; $f_c \pm 80\text{MHz} \geq 40\text{dB}$
(BWch 80MHz & CP/OBW ≤ 78MHz) - $f_c \pm 80\text{MHz} \geq 25\text{dB}$
(BWch 80+80MHz & CP/OBW ≤ 78MHz) - $f_c \pm 80\text{MHz} \geq 25\text{dB}$
(BWch 160MHz & CP/OBW ≤ 158MHz) - N/A

5.5.2 Test Setup



5.5.3 Test Results

Result **PASS**

For the measurement records, refer to the appendix A.

Remark: This testing was carried out on all operation modes, but only the worst case was presented in this report.

Prüfbericht - Nr.: CN26NHPF 002
Test Report No.:

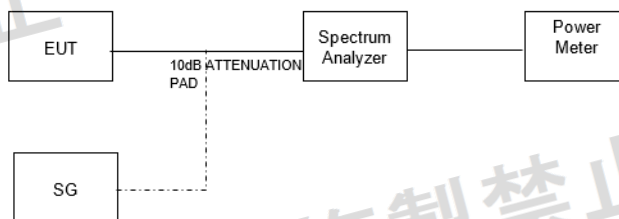
Seite 19 von 27
Page 19 of 27

5.6 Antenna Power Measurement

5.6.1 Limits of Antenna Power

Antenna Power Limit (mW/MHz)
W52/W53/W56: (BWch 20MHz) - ≤ 10 ; (BWch 40MHz) - ≤ 5 ; (BWch 80MHz) - ≤ 2.5 ; (BWch 160MHz) - ≤ 1.25 ;
Antenna Power Error Limit (%)
W52/W53: +20% ~ -80%; W56: +50% ~ -50%
EIRP Limit (mW/MHz)
W52 (BWch 20MHz) - ≤ 10 ; (BWch 40MHz) - ≤ 5 ; (BWch 80MHz) - ≤ 2.5 ; (BWch 160MHz) - ≤ 1.25 W53 with TPC (BWch 20MHz) - ≤ 10 ; (BWch 40MHz) - ≤ 5 ; (BWch 80MHz) - ≤ 2.5 ; (BWch 160MHz) - ≤ 1.25 W53 w/o TPC (BWch 20MHz) - ≤ 5 ; (BWch 40MHz) - ≤ 2.5 ; (BWch 80MHz) - ≤ 1.25 ; (BWch 160MHz) - ≤ 0.625 W56 with TPC (BWch 20MHz) - ≤ 50 ; (BWch 40MHz) - ≤ 25 ; (BWch 80MHz) - ≤ 12.5 ; (BWch 160MHz) - ≤ 6.25 W56 w/o TPC (BWch 20MHz) - ≤ 25 ; (BWch 40MHz) - ≤ 12.5 ; (BWch 80MHz) - ≤ 6.25 ; (BWch 160MHz) - ≤ 3.125

5.6.2 Test Setup



Note: A high-frequency power meter is directly connected to the output of a dummy load (attenuator) when measuring the total power of a system other than the orthogonal frequency division multiplexing system or the spread spectrum system using direct spreading.

5.6.3 Condition of Measuring Instrument

- (1) Measure the equivalent noise bandwidth at the resolution bandwidth of 1 MHz of the spectrum analyzer, correct the bandwidth to the 1 MHz equivalent bandwidth, and read the displayed value. However, when the spread bandwidth is 1 MHz or less, correction shall be performed only when "spread bandwidth (MHz)/equivalent noise bandwidth (MHz)" exceeds 1.
- (2) The attenuation of the dummy load (attenuator) shall be the value that gives the optimum operating input level to the spectrum analyzer.
- (3) Set the spectrum analyzer as follows when searching for the frequency that gives the maximum antenna power.

Center frequency:	Test frequency
Sweep frequency width:	About twice the occupied frequency bandwidth
Resolution bandwidth:	1MHz
Video bandwidth:	About three times the resolution bandwidth
Sweep time:	Minimum time for guaranteed measurement accuracy
(In the case of burst waves, the time at which one or more bursts are included per sample)	

Prüfbericht - Nr.: **CN26NHPF 002**
Test Report No.:

Seite 20 von 27
Page 20 of 27

Trigger condition: Free run
Sweep mode: Continuous sweep
Detection mode: positive peak
Display mode: Max hold

- (4) Set the spectrum analyzer as follows when measuring the antenna power.
- | | |
|------------------------|---|
| Center frequency | The frequency that gives the maximum power (searched frequency) |
| Sweep frequency width: | 0Hz |
| Resolution bandwidth: | 1MHz |
| Video bandwidth : | Same as resolution bandwidth |
| Sweep mode: | Continuous sweep |

5.6.4 Condition of Test Equipment

- (1) Set to the test frequency and enter the continuous transmission state or continuous burst transmission state.
- (2) If a spread code is used, set it to the test spread code and modulate it with the standard coded test signal.
- (3) If the orthogonal frequency division multiplexing system is used, it shall be in a burst transmission state and in a modulation state in which the proportion of time in which the number of subcarriers is the smallest is maximized. At this time, it is performed within a range that can occur continuously in the actual operation. However, when the modulation cannot be set, it can be performed in continuous burst transmission state or continuous transmission state.

5.6.5 Measurement Procedure

- (1) **Those using frequency hopping method (including DSSS or composite method with OFDM)**
 - a. Confirming in the submitted document that the frequency hopping intervals in the frequency distribution of frequency hopping are equal intervals of 1 MHz or less, and that the probability of occurrence at each hopping frequency is uniform, and that the probability of occurrence at each hopping frequency is uniform. If it is, it is implemented by the following method.
 - (a) Connect a high frequency power meter to the output of the dummy load (attenuator) and measure the total power.
 - (b) Divide the total power by the spreading bandwidth to calculate the average power per 1 MHz.
 - (c) Antenna power shall be as follows.
 - A Value of (b) for continuous wave
 - B For burst wave Average power in burst is calculated from the value of (b) and the transmission time rate.
 - b. If the frequency distribution of frequency hopping or the probability of occurrence at each hopping frequency is not uniform, set the spectrum analyzer as in 2(3) to search for the frequency that gives the maximum antenna power, and then perform spectrum analysis. Set the device as in 2(4), and measure the antenna power at the frequency that gives the maximum power.
- (2) **In the case of those using OFDM or DSSS**
 - a. Set the spectrum analyzer as in 2(3).
 - b. After repeating the sweep until no change is observed in the display, measure the frequency at which the power per 1 MHz gives the maximum value.
 - c. Set the spectrum analyzer as in 2(4).
 - d. Connect the high frequency power meter to the IF output terminal of the spectrum analyzer.
 - e. Antenna power shall be as follows.
 - (a) For continuous wave: The value corrected by 2(1) from the indication of the high-frequency power meter
 - (b) Burst wave: Calculated average power in a burst from values corrected in the same way as for continuous waves and the transmission time rate
 - f. In the case of using the orthogonal frequency division multiplexing system, when there are multiple subcarrier modulation systems, measure the antenna power at each time and take the largest value as the measured value.

- (3) **In the case of items using other methods**

Prüfbericht - Nr.: CN26NHPF 002
Test Report No.:

Seite 21 von 27
Page 21 of 27

- (a) Connect a high-frequency power meter to the output of the dummy load (attenuator) and measure the total power.
- (b) Antenna power shall be as follows.
 - a. Value of a for continuous wave
 - b. Burst wave The average power in the burst is calculated from the value of (a) and the transmission time rate.

5.6.6 Test Results

Result **PASS**

For the measurement records, refer to the appendix A.

Remark: This testing was carried out on all operation modes, but only the worst case was presented in this report.

Prüfbericht - Nr.: **CN26NHPF 002**
Test Report No.:

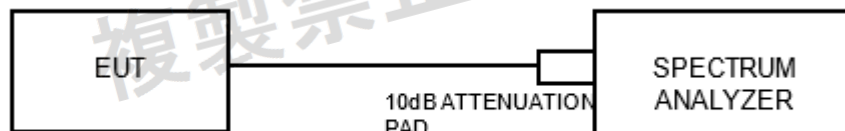
Seite 22 von 27
Page 22 of 27

5.7 Spurious Emissions for Receiver

5.7.1 Limits of Spurious Emissions for Receiver

Frequencies (MHz)	Limit
Below 1GHz	$\leq 4\text{nW}$ (-54dBm)
Above 1GHz	$\leq 20\text{nW}$ (-47dBm)

5.7.2 Test Setup



5.7.3 Measurement Procedure

- (1) Set the spectrum analyzer as follows when searching.
Sweep frequency width: 30MHz to 5 times the carrier frequency
Resolution bandwidth: 100 kHz for frequencies below 1 GHz, 1 MHz for frequencies above 1 GHz
Video bandwidth: Same as resolution bandwidth
Sweep time: Minimum time for guaranteed measurement accuracy
Sweep mode: Single sweep
Detection mode: positive peak
- (2) Set the spectrum analyzer for secondary emission measurement as follows.
Center frequency: Secondary emission frequency
Sweep frequency width: 0Hz
Resolution bandwidth: 100 kHz for frequencies below 1 GHz, 1 MHz for frequencies above 1 GHz
Video bandwidth: Same as resolution bandwidth
Sweep time: Minimum time for guaranteed measurement accuracy
Sweep mode: Single sweep
Detection mode: sample

5.7.4 Test Results

Result **PASS**

For the measurement records, refer to the appendix A.

Remark: This testing was carried out on all operation modes, but only the worst case was presented in this report.

Prüfbericht - Nr.: CN26NHPF 002
Test Report No.:


Seite 23 von 27
Page 23 of 27

5.8 Burst Length

5.8.1 Limits of Burst Length

Frequencies (MHz)	Limit
Transmitter Operating	$\leq 4\text{ms}$

5.8.2 Test Setup



5.8.3 Measuring instrument conditions, etc.

Set the spectrum analyzer as follows.

Center frequency	Measurement hopping frequency
Sweep frequency width	0Hz
Resolution bandwidth	about 1MHz
Video bandwidth	Same as resolution bandwidth
Sweep time	Hopping period
Trigger condition	Video trigger
Sweep mode	Single sweep
Detection mode	positive peak.

3 Condition of test equipment

Set to the test frequency and test spreading code and modulate with the standard coded test signal.

5.8.4 Test Results

Result **PASS**

For the measurement records, refer to the appendix A.

Remark: This testing was carried out on all operation modes, but only the worst case was presented in this report.

Prüfbericht - Nr.: **CN26NHPF 002**
Test Report No.:


Seite 24 von 27
Page 24 of 27

5.9 Interference Prevention Function

5.9.1 Limits of Interference Prevention Function

Radio equipment used mainly on the same premises and automatically transmits or receives identification code.

5.9.2 Test Setup



5.9.3 Condition of Measuring Instrument

- (1) The demodulator shall be able to demodulate the transmission signal sent by EUT and display the content of the identification code.
- (2) The counterpart device shall be capable of transmitting the same identification code as the transmission signal transmitted by EUT.
- (3) Condition of test equipment
Normal use condition.

5.9.4 Measurement procedure

- (1) When EUT has a function to automatically transmit an identification code
 - a) Transmit the identification code specified in the Equipment Regulations from the test equipment.
 - b) Check the identification code sent by the demodulator.
- (2) When the test equipment has a function to automatically receive the identification code
 - a) Transmit the identification code specified in the Equipment Regulations from the counterpart device.
 - b) Confirm that communication is performed with the EUT using the dedicated jig.
 - c) Transmit a code different from the identification code specified in the Equipment Regulations from the counterpart device.
 - d) Confirm that EUT stops transmission or displays that the identification code is different.

5.9.5 How to describe test results

- (1) When EUT has a function to automatically transmit an identification code
If the code stipulated in the equipment rule and the demodulated code are the same, it is described as "passed", and if they are different, it is described as "failed".
- (2) When the test equipment has a function to automatically receive the identification code
If the received code is the code stipulated in the equipment regulations, normal reception is performed, and if the code is different from the code stipulated in the equipment regulations, a message indicating that the code is different is displayed. "No" shall be entered in other case.

5.9.6 Test Results

Result **PASS**

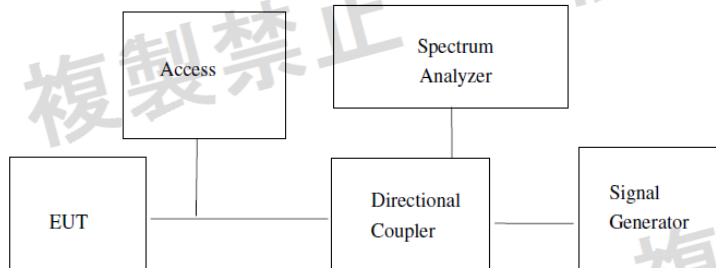
For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: **CN26NHPF 002**
Test Report No.:

Seite 25 von 27
Page 25 of 27

5.10 Carrier Sensing

5.10.1 Test Setup



5.10.2 Measurement procedure

- (a) Link EUT and Access Point to Directional Coupler input port.
- (b) Link Signal Generator and Spectrum Analyzer to test port and output port in the Directional Coupler separately.
- (c) A positive Peak Detector function in Spectrum Analyzer must be used.
- (d) Set the Span to Zero.

Press the Signal Generator on and it will output the Carrier Signal. When the Link breaks off, wait a minute and press the Signal Generator off. After a while, reset the Link and done the test.

Signal Generator Power Level (dBm) = $22.79 + G - 20 \log(F)$
G: Antenna Gain
F: operation frequency

5.10.3 Test Results

Result **PASS**

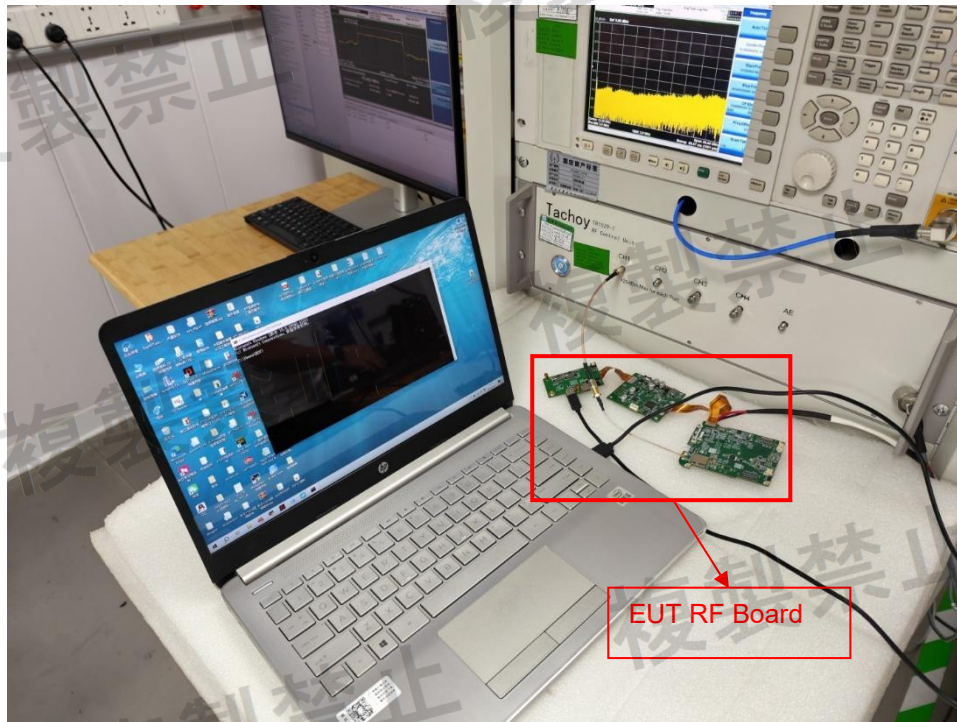
For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN26NHPF 002
Test Report No.:

Seite 26 von 27
Page 26 of 27

6 Photographs of the Test Configuration

Photograph 1: Set-up for Radio Spectrum Testing



Prüfbericht - Nr.: CN26NHPF 002
Test Report No.:

Seite 27 von 27
Page 27 of 27

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty.....	6
Table 3: Technical Specification of EUT.....	7
Table 4: RF Channel and Frequency of 5.2GHz Wi-Fi.....	8
Table 5: Test Conditions.....	9
Table 6: List of Accessories and Auxiliary Equipment.....	9

8 List of Photographs

Photograph 1: Set-up for Radio Spectrum Testing	26
---	----

Appendix A: Test Results of 5.2GHz Band Wi-Fi

APPENDIX A.1: TEST RESULTS OF FREQUENCY TOLERANCE	2
Test Result	2
APPENDIX A.2: TEST RESULTS OF ANTENNA POWER	3
Test Result	3
APPENDIX A.3: TEST RESULTS OF OCCUPIED CHANNEL BANDWIDTH (99%)	5
Test Result	5
Test Graphs	6
APPENDIX A.4: TEST RESULTS OF UNWANTED EMISSION STRENGTH	20
Test Result	20
Test Graphs	27
APPENDIX A.5: TEST RESULTS OF SPURIOUS EMISSIONS FOR RECEIVER	55
Test Result	55
Test Graphs	57
APPENDIX A.6: TEST RESULTS OF BURST LENGTH	71
Test Result	71
APPENDIX A.7: TEST RESULTS OF ADJACENT CHANNEL POWER	72
Test Result	72
Test Graphs	73
APPENDIX A.8: TEST RESULTS OF CARRIER SENSING	87
Test Result	87
APPENDIX A.9: TEST RESULTS OF INTERFERENCE PREVENTION FUNCTION	88
Test Result	88

**Appendix A.1: Test Results of Frequency Tolerance***Test Result*

Condition	Antenna	Modulation	Frequency (MHz)	Test Frequency (MHz)	Frequency Tolerance (ppm)	Limit (ppm)	Result
NTNV	ANT1	802.11a	5180.00	5180.002	0.386	±20	Pass
NTNV	ANT2	802.11a	5180.00	5180.001	0.193	±20	Pass
NTNV	ANT1	802.11a	5200.00	5199.994	-1.154	±20	Pass
NTNV	ANT2	802.11a	5200.00	5199.993	-1.346	±20	Pass
NTNV	ANT1	802.11a	5240.00	5239.990	-1.908	±20	Pass
NTNV	ANT2	802.11a	5240.00	5239.990	-1.908	±20	Pass
NTNV	ANT1	802.11n(HT40)	5190.00	5189.988	-2.312	±20	Pass
NTNV	ANT2	802.11n(HT40)	5190.00	5189.988	-2.312	±20	Pass
NTNV	ANT1	802.11n(HT40)	5230.00	5229.986	-2.677	±20	Pass
NTNV	ANT2	802.11n(HT40)	5230.00	5229.985	-2.868	±20	Pass
NTNV	ANT1	802.11ac(VHT80)	5210.00	5209.984	-3.071	±20	Pass
NTNV	ANT2	802.11ac(VHT80)	5210.00	5209.983	-3.263	±20	Pass

Appendix A.2: Test Results of Antenna Power

Test Result

Condition	Antenna	Mode	Frequency	Measured Power (dBm)	Antenna Power (mW/MHz)	Rated Power (mW/MHz)	Power Limit (mW/MHz)	Power Tolerance (%)	Tolerance Limit (%)	Result
NVNT	ANT1	802.11a	5180.00	1.78	1.507	3.00	10.00	-49.78	-80~+20	Pass
NVNT	ANT2	802.11a	5180.00	0.76	1.191	3.00	10.00	-60.29	-80~+20	Pass
NVNT	ANT1	802.11a	5200.00	2.16	1.644	3.00	10.00	-45.19	-80~+20	Pass
NVNT	ANT2	802.11a	5200.00	1.00	1.259	3.00	10.00	-58.04	-80~+20	Pass
NVNT	ANT1	802.11a	5240.00	2.92	1.959	3.00	10.00	-34.71	-80~+20	Pass
NVNT	ANT2	802.11a	5240.00	0.74	1.186	3.00	10.00	-60.47	-80~+20	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	1.27	1.340	3.00	10.00	-55.34	-80~+20	Pass
NVNT	ANT2	802.11n(HT20)	5180.00	0.34	1.081	3.00	10.00	-63.95	-80~+20	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	1.31	1.352	3.00	10.00	-54.93	-80~+20	Pass
NVNT	ANT2	802.11n(HT20)	5200.00	0.27	1.064	3.00	10.00	-64.53	-80~+20	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	2.54	1.795	3.00	10.00	-40.18	-80~+20	Pass
NVNT	ANT2	802.11n(HT20)	5240.00	0.21	1.050	3.00	10.00	-65.02	-80~+20	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	0.98	1.253	3.00	10.00	-58.23	-80~+20	Pass
NVNT	ANT2	802.11ac(VHT20)	5180.00	-0.06	0.986	3.00	10.00	-67.12	-80~+20	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	1.62	1.452	3.00	10.00	-51.60	-80~+20	Pass
NVNT	ANT2	802.11ac(VHT20)	5200.00	0.27	1.064	3.00	10.00	-64.53	-80~+20	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	-0.27	0.940	3.00	10.00	-68.68	-80~+20	Pass
NVNT	ANT2	802.11ac(VHT20)	5240.00	-1.70	0.676	3.00	10.00	-77.46	-80~+20	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	-3.62	0.435	1.50	5.00	-71.03	-80~+20	Pass
NVNT	ANT2	802.11n(HT40)	5190.00	-4.66	0.342	1.50	5.00	-77.20	-80~+20	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	-4.20	0.380	1.50	5.00	-74.65	-80~+20	Pass
NVNT	ANT2	802.11n(HT40)	5230.00	-4.98	0.318	1.50	5.00	-78.82	-80~+20	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	-3.72	0.425	1.50	5.00	-71.69	-80~+20	Pass
NVNT	ANT2	802.11ac(VHT40)	5190.00	-4.83	0.329	1.50	5.00	-78.08	-80~+20	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	-3.92	0.406	1.50	5.00	-72.97	-80~+20	Pass
NVNT	ANT2	802.11ac(VHT40)	5230.00	-3.24	0.474	1.50	5.00	-68.38	-80~+20	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	-5.76	0.265	1.00	2.50	-73.45	-80~+20	Pass
NVNT	ANT2	802.11ac(VHT80)	5210.00	-6.71	0.213	1.00	2.50	-78.67	-80~+20	Pass

Condition	Antenna	Mode	Frequency	Measured Power (dBm/MHz)	Antenna Power (mW/MHz)	Rated Power (mW/MHz)	Power Limit (mW/MHz)	Power Tolerance (%)	Tolerance Limit (%)	Result
NVNT	MIMO_TX	802.11n(HT20)	5180.00	3.84	2.421	3.00	10.00	-19.30	-80~+20	Pass
NVNT	MIMO_TX	802.11n(HT20)	5200.00	3.83	2.415	3.00	10.00	-19.48	-80~+20	Pass
NVNT	MIMO_TX	802.11n(HT20)	5240.00	4.54	2.844	3.00	10.00	-5.18	-80~+20	Pass
NVNT	MIMO_TX	802.11ac(VHT20)	5180.00	3.50	2.239	3.00	10.00	-25.38	-80~+20	Pass
NVNT	MIMO_TX	802.11ac(VHT20)	5200.00	4.01	2.518	3.00	10.00	-16.08	-80~+20	Pass
NVNT	MIMO_TX	802.11ac(VHT20)	5240.00	2.09	1.618	3.00	10.00	-46.06	-80~+20	Pass
NVNT	MIMO_TX	802.11n(HT40)	5190.00	-1.10	0.776	1.50	5.00	-48.25	-80~+20	Pass
NVNT	MIMO_TX	802.11n(HT40)	5230.00	-1.56	0.698	1.50	5.00	-53.45	-80~+20	Pass
NVNT	MIMO_TX	802.11ac(VHT40)	5190.00	-1.23	0.753	1.50	5.00	-49.78	-80~+20	Pass
NVNT	MIMO_TX	802.11ac(VHT40)	5230.00	-0.56	0.879	1.50	5.00	-41.40	-80~+20	Pass
NVNT	MIMO_TX	802.11ac(VHT80)	5210.00	-3.20	0.479	1.00	2.50	-52.14	-80~+20	Pass

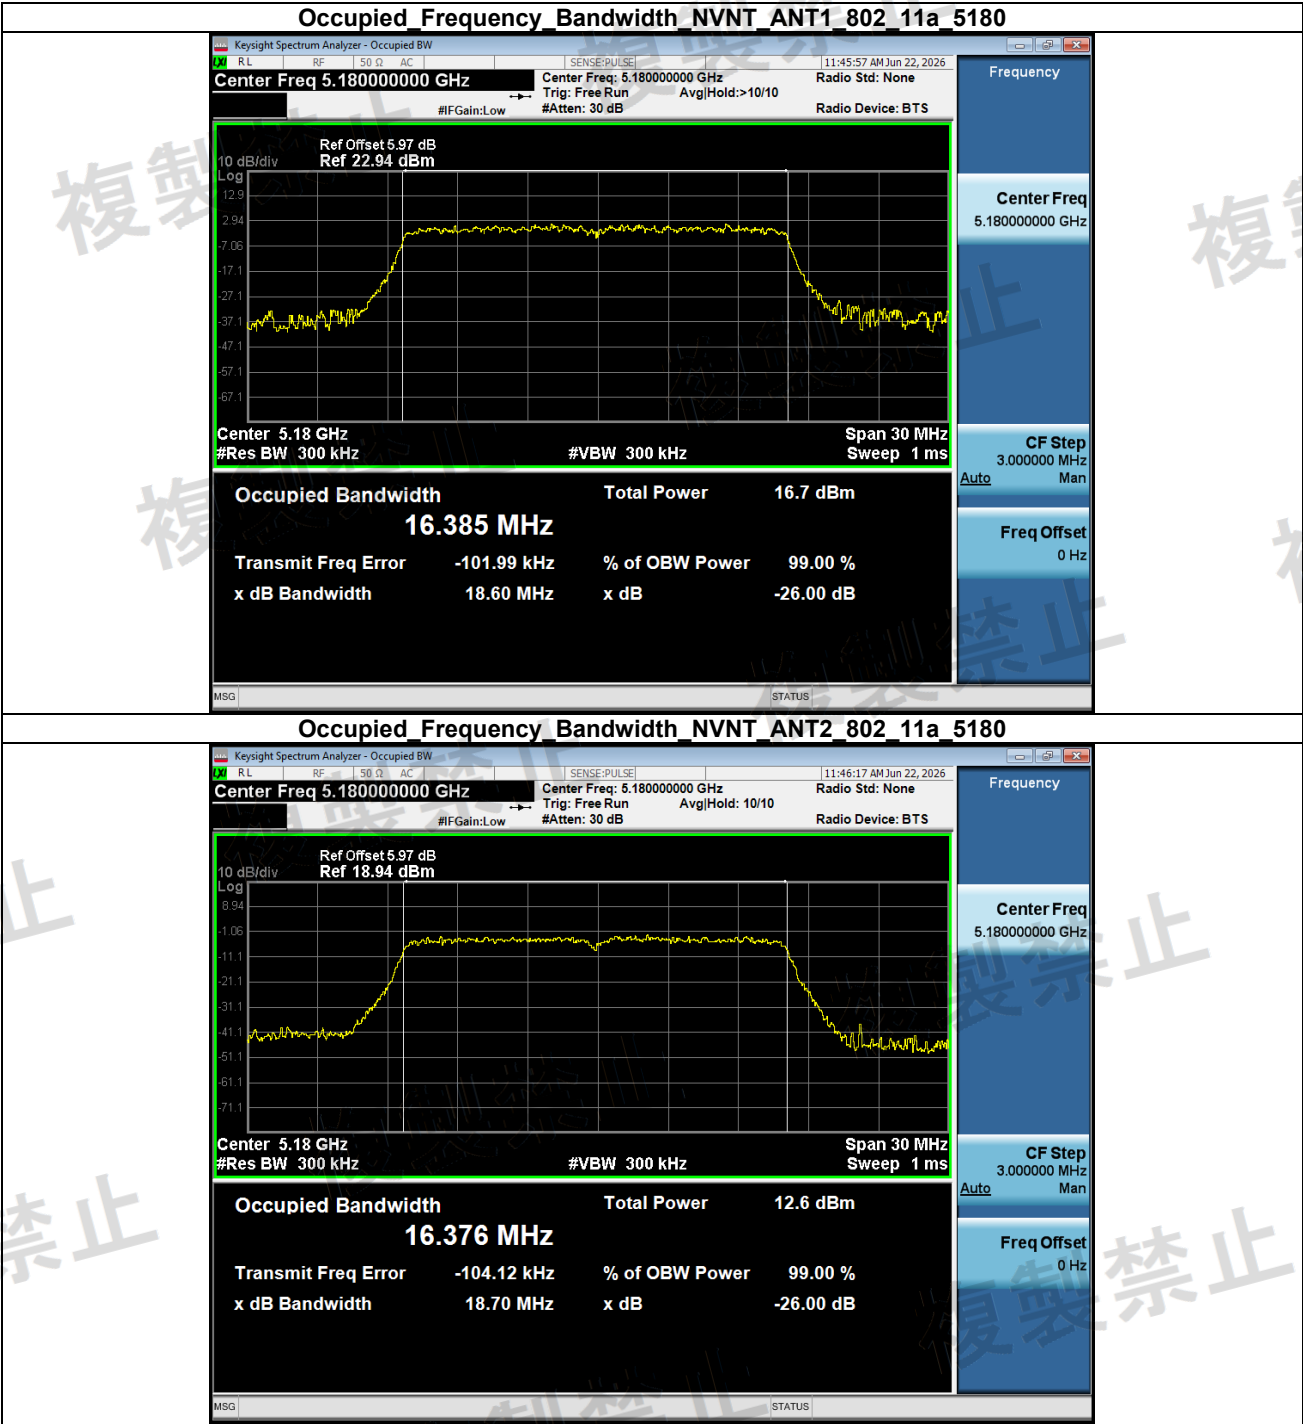
Condition	Antenna	Mode	Frequency	Measured Power (dBm/MHz)	Antenna Gain (dBi)	EIRP (mW/MHz)	EIRP Limit (mW/MHz)	Result
NVNT	ANT1	802.11a	5180.00	1.78	3.15	3.11	10.00	Pass
NVNT	ANT2	802.11a	5180.00	0.76	2.03	1.90	10.00	Pass
NVNT	ANT1	802.11a	5200.00	2.16	3.15	3.40	10.00	Pass
NVNT	ANT2	802.11a	5200.00	1.00	2.03	2.01	10.00	Pass
NVNT	ANT1	802.11a	5240.00	2.92	3.15	4.05	10.00	Pass
NVNT	ANT2	802.11a	5240.00	0.74	2.03	1.89	10.00	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	1.27	3.15	2.77	10.00	Pass
NVNT	ANT2	802.11n(HT20)	5180.00	0.34	2.03	1.73	10.00	Pass
NVNT	MIMO_TX	802.11n(HT20)	5180.00	3.84	3.15	5.00	10.00	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	1.31	3.15	2.79	10.00	Pass
NVNT	ANT2	802.11n(HT20)	5200.00	0.27	2.03	1.70	10.00	Pass
NVNT	MIMO_TX	802.11n(HT20)	5200.00	3.83	3.15	4.99	10.00	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	2.54	3.15	3.71	10.00	Pass
NVNT	ANT2	802.11n(HT20)	5240.00	0.21	2.03	1.67	10.00	Pass
NVNT	MIMO_TX	802.11n(HT20)	5240.00	4.54	3.15	5.87	10.00	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	0.98	3.15	2.59	10.00	Pass
NVNT	ANT2	802.11ac(VHT20)	5180.00	-0.06	2.03	1.57	10.00	Pass
NVNT	MIMO_TX	802.11ac(VHT20)	5180.00	3.50	3.15	4.62	10.00	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	1.62	3.15	3.00	10.00	Pass
NVNT	ANT2	802.11ac(VHT20)	5200.00	0.27	2.03	1.70	10.00	Pass
NVNT	MIMO_TX	802.11ac(VHT20)	5200.00	4.01	3.15	5.20	10.00	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	-0.27	3.15	1.94	10.00	Pass
NVNT	ANT2	802.11ac(VHT20)	5240.00	-1.70	2.03	1.08	10.00	Pass
NVNT	MIMO_TX	802.11ac(VHT20)	5240.00	2.09	3.15	3.34	10.00	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	-3.62	3.15	0.90	5.00	Pass
NVNT	ANT2	802.11n(HT40)	5190.00	-4.66	2.03	0.55	5.00	Pass
NVNT	MIMO_TX	802.11n(HT40)	5190.00	-1.10	3.15	1.60	5.00	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	-4.20	3.15	0.79	5.00	Pass
NVNT	ANT2	802.11n(HT40)	5230.00	-4.98	2.03	0.51	5.00	Pass
NVNT	MIMO_TX	802.11n(HT40)	5230.00	-1.56	3.15	1.44	5.00	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	-3.72	3.15	0.88	5.00	Pass
NVNT	ANT2	802.11ac(VHT40)	5190.00	-4.83	2.03	0.52	5.00	Pass
NVNT	MIMO_TX	802.11ac(VHT40)	5190.00	-1.23	3.15	1.56	5.00	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	-3.92	3.15	0.84	5.00	Pass
NVNT	ANT2	802.11ac(VHT40)	5230.00	-3.24	2.03	0.76	5.00	Pass
NVNT	MIMO_TX	802.11ac(VHT40)	5230.00	-0.56	3.15	1.82	5.00	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	-5.76	3.15	0.55	2.50	Pass
NVNT	ANT2	802.11ac(VHT80)	5210.00	-6.71	2.03	0.34	2.50	Pass
NVNT	MIMO_TX	802.11ac(VHT80)	5210.00	-3.20	3.15	0.99	2.50	Pass

Appendix A.3: Test Results of Occupied Channel Bandwidth (99%)

Test Result

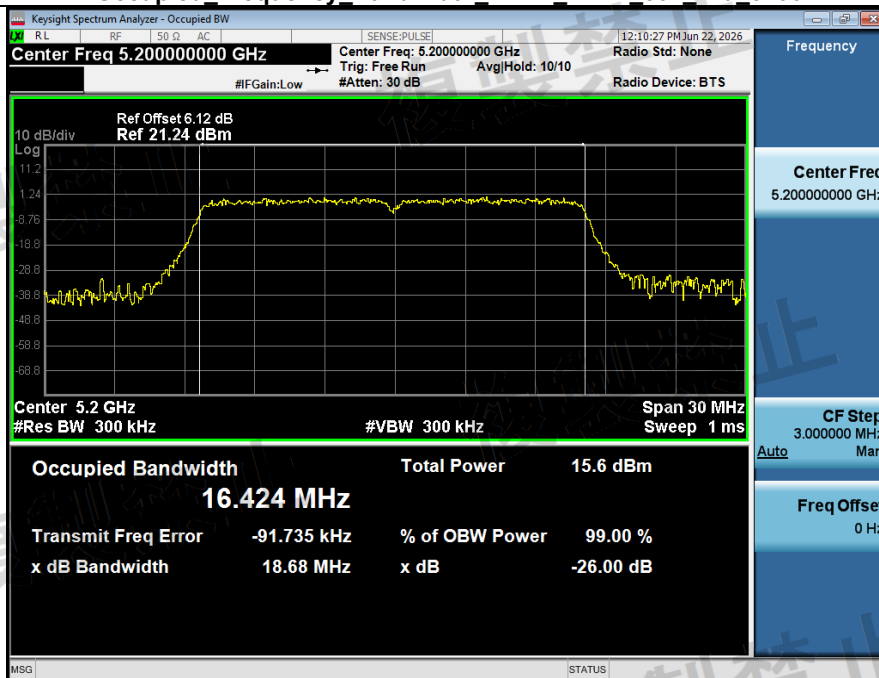
Condition	Antenna	Mode	Frequency (MHz)	Occupied Bandwidth (MHz)	Limit (MHz)	Result
NVNT	ANT1	802.11a	5180.00	16.39	20	Pass
NVNT	ANT2	802.11a	5180.00	16.38	20	Pass
NVNT	ANT1	802.11a	5200.00	16.42	20	Pass
NVNT	ANT2	802.11a	5200.00	16.37	20	Pass
NVNT	ANT1	802.11a	5240.00	16.38	20	Pass
NVNT	ANT2	802.11a	5240.00	16.39	20	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	17.55	20	Pass
NVNT	ANT2	802.11n(HT20)	5180.00	17.56	20	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	17.56	20	Pass
NVNT	ANT2	802.11n(HT20)	5200.00	17.55	20	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	17.54	20	Pass
NVNT	ANT2	802.11n(HT20)	5240.00	17.55	20	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	18.07	20	Pass
NVNT	ANT2	802.11ac(VHT20)	5180.00	17.86	20	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	19.46	20	Pass
NVNT	ANT2	802.11ac(VHT20)	5200.00	18.25	20	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	17.98	20	Pass
NVNT	ANT2	802.11ac(VHT20)	5240.00	18.20	20	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	36.07	40	Pass
NVNT	ANT2	802.11n(HT40)	5190.00	35.99	40	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	36.08	40	Pass
NVNT	ANT2	802.11n(HT40)	5230.00	36.06	40	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	36.18	40	Pass
NVNT	ANT2	802.11ac(VHT40)	5190.00	36.12	40	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	36.00	40	Pass
NVNT	ANT2	802.11ac(VHT40)	5230.00	36.05	40	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	74.68	80	Pass
NVNT	ANT2	802.11ac(VHT80)	5210.00	74.76	80	Pass

Test Graphs

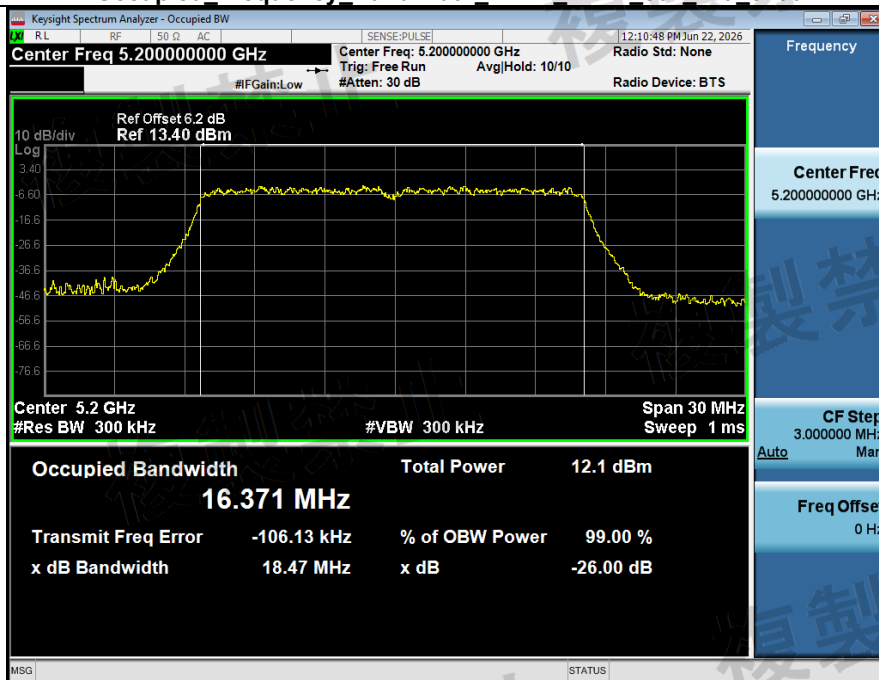




Occupied Frequency Bandwidth NVNT ANT1 802 11a 5200

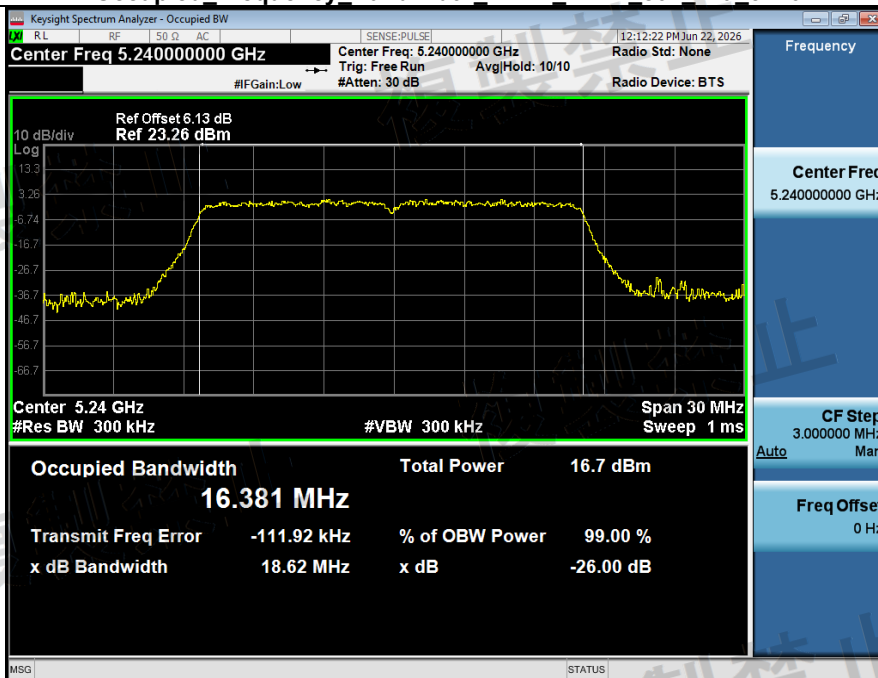


Occupied Frequency Bandwidth NVNT ANT2 802 11a 5200

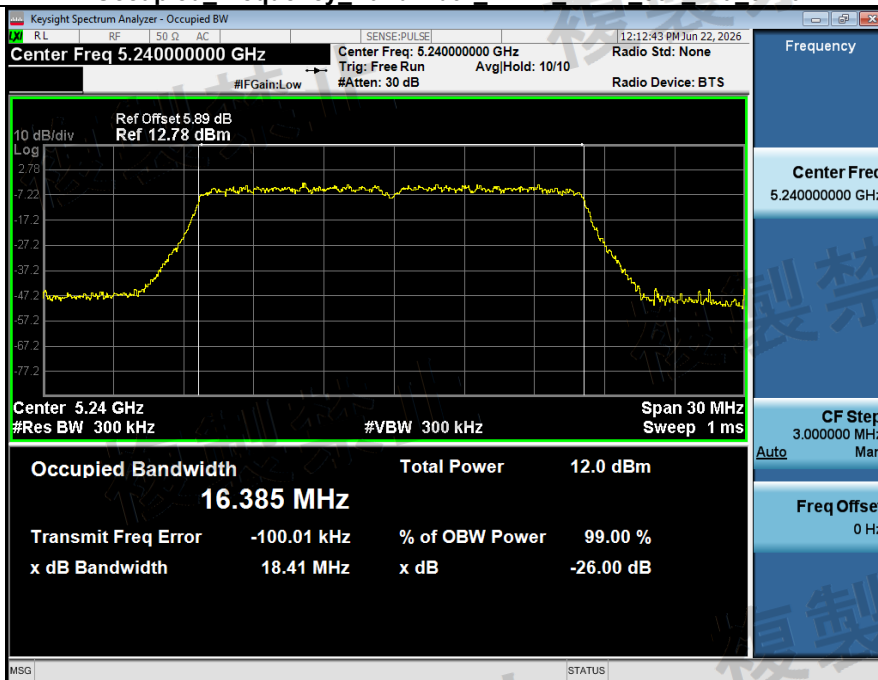




Occupied Frequency Bandwidth NVNT ANT1 802 11a 5240

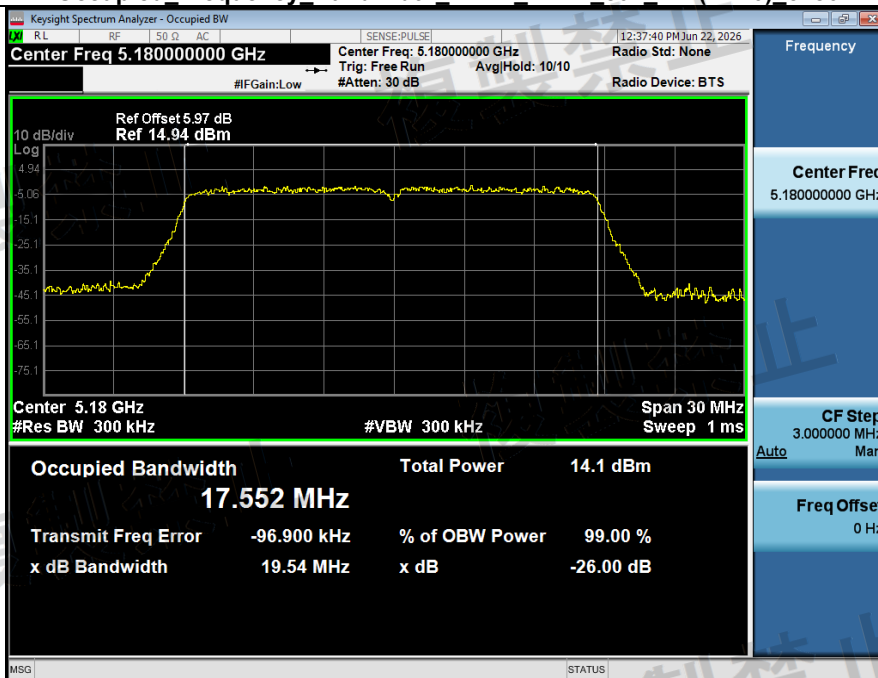


Occupied Frequency Bandwidth NVNT ANT2 802 11a 5240

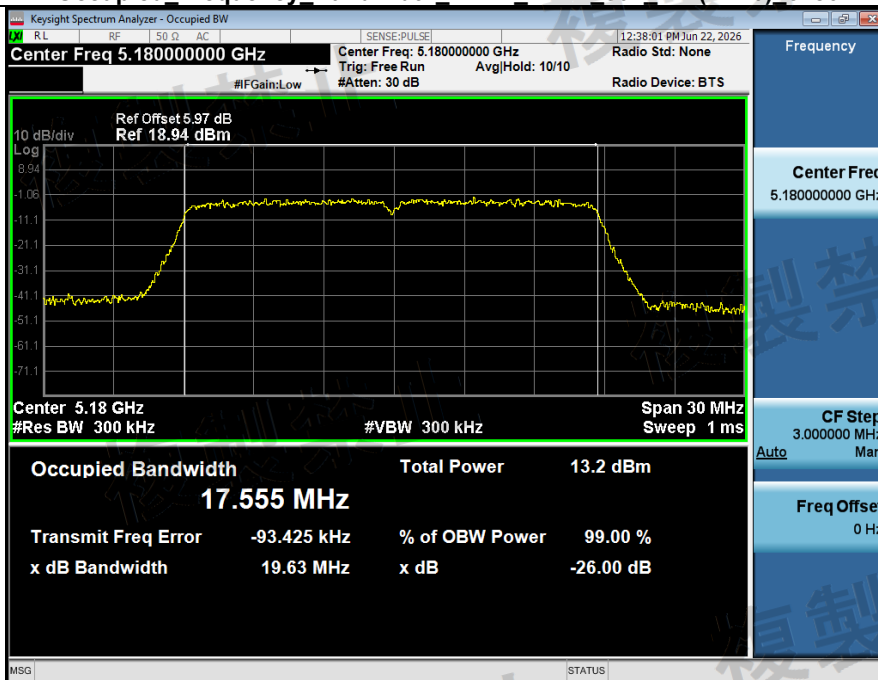




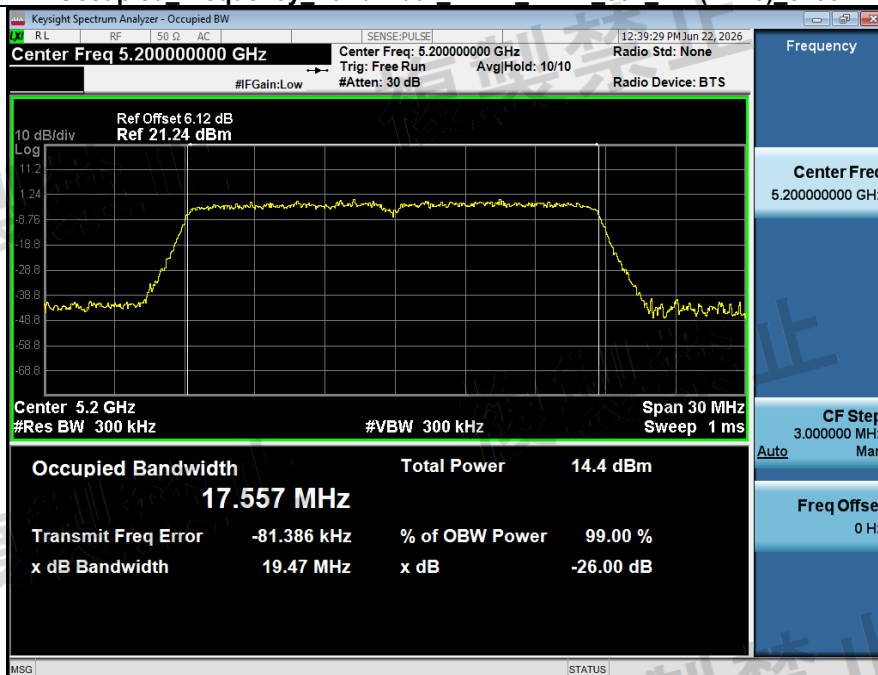
Occupied Frequency Bandwidth NVNT_ANT1_802_11n(HT20)_5180



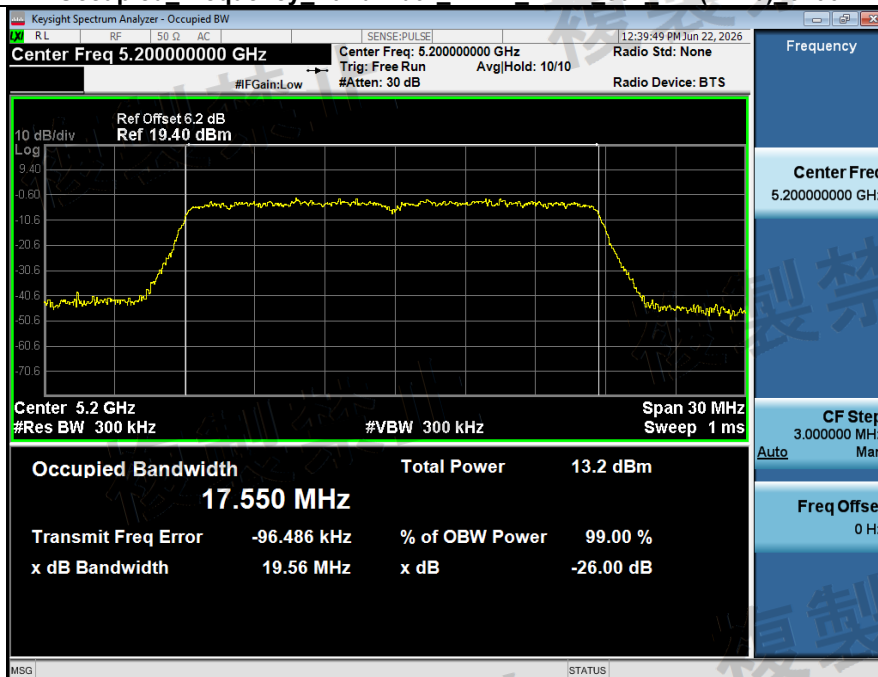
Occupied Frequency Bandwidth NVNT_ANT2_802_11n(HT20)_5180



Occupied Frequency Bandwidth NVNT_ANT1_802_11n(HT20)_5200

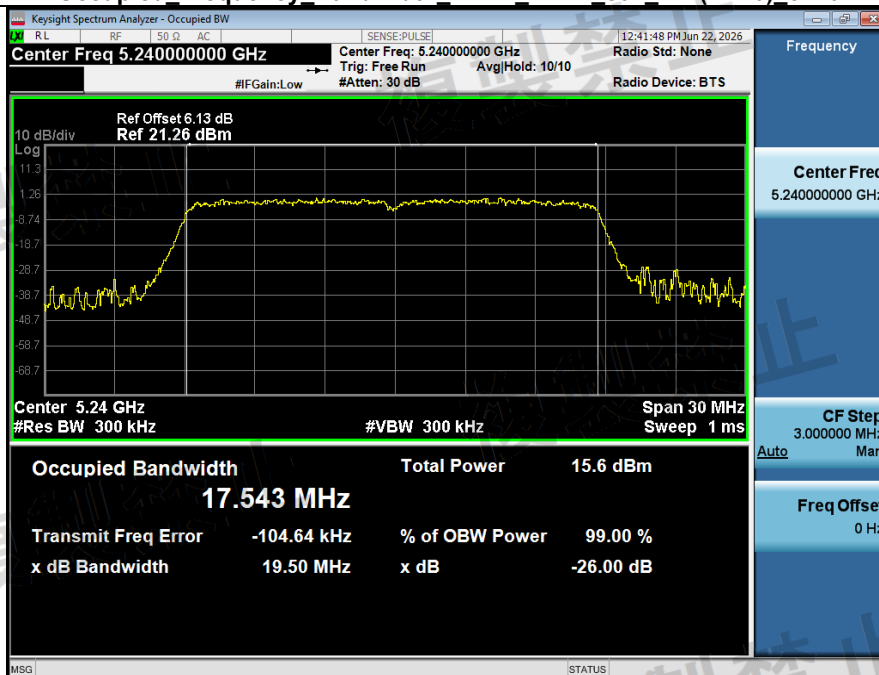


Occupied Frequency Bandwidth NVNT_ANT2_802_11n(HT20)_5200

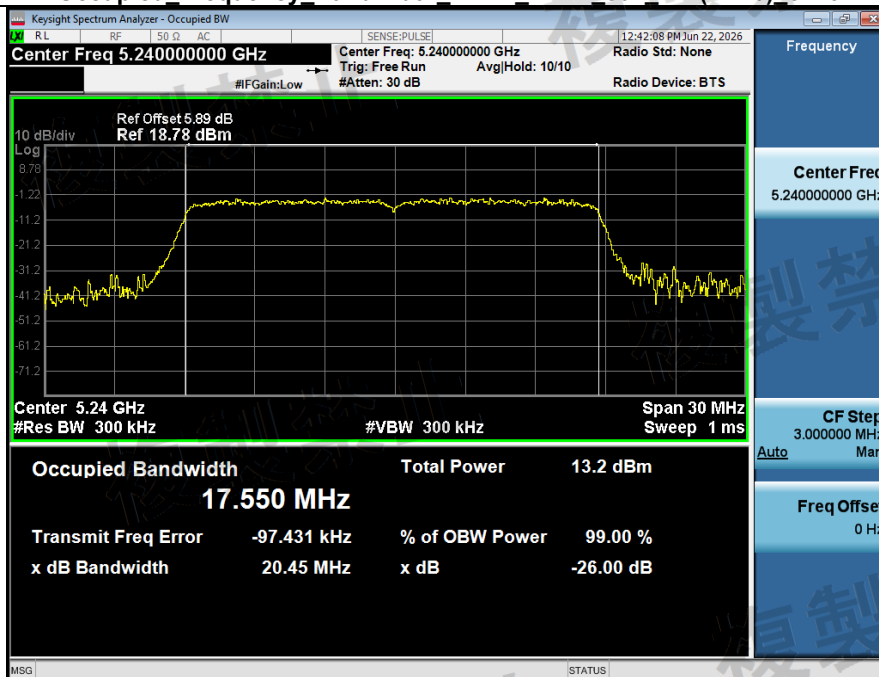




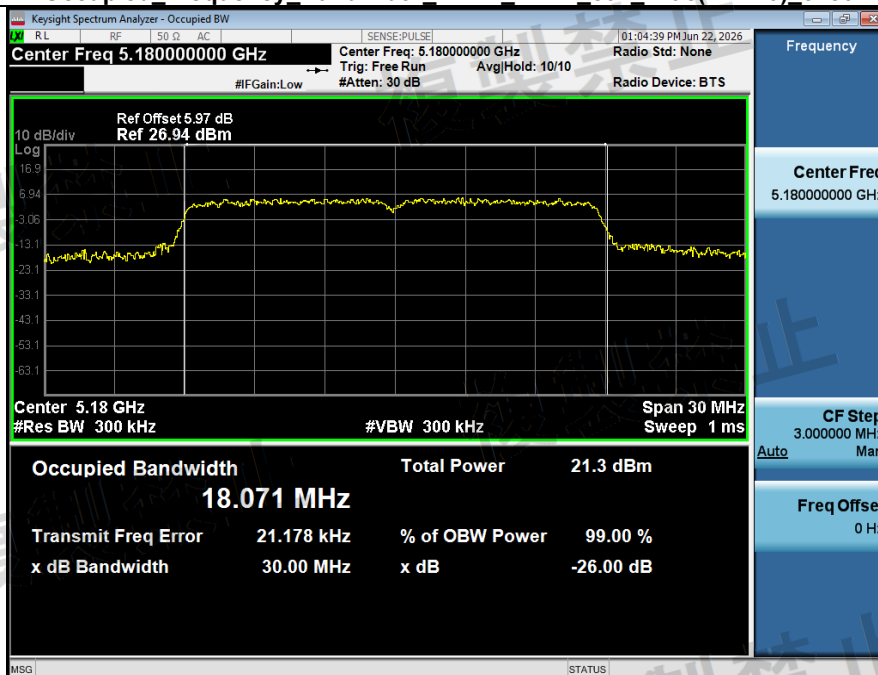
Occupied Frequency Bandwidth NVNT_ANT1_802_11n(HT20)_5240



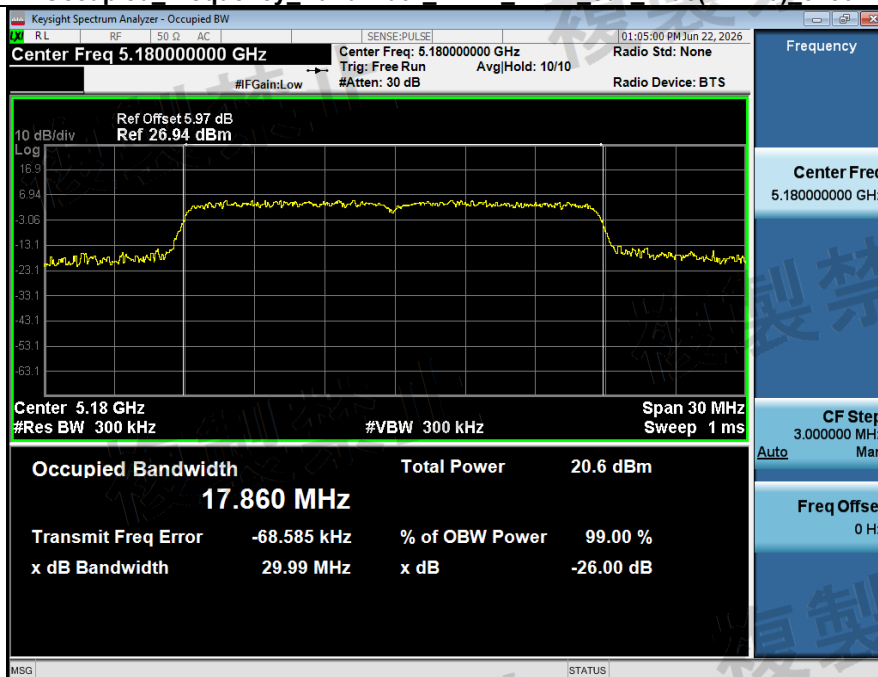
Occupied Frequency Bandwidth NVNT_ANT2_802_11n(HT20)_5240



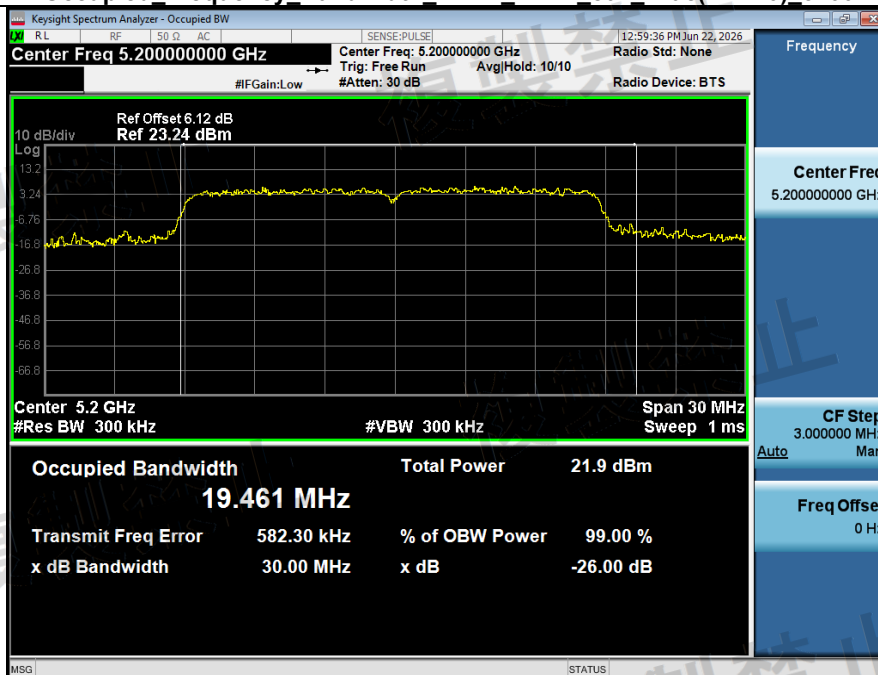
Occupied Frequency Bandwidth NVNT_ANT1_802_11ac(VHT20)_5180



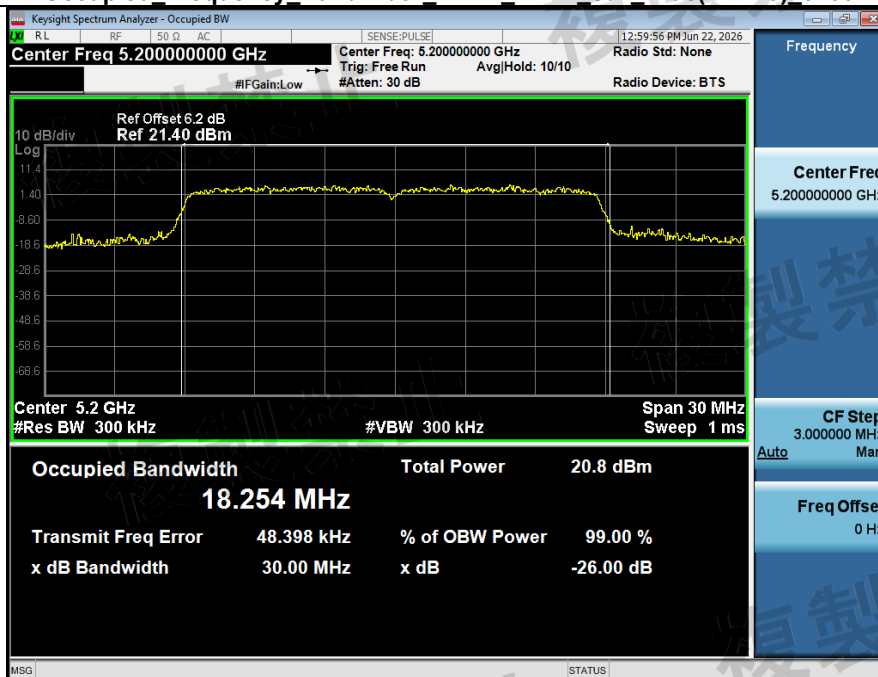
Occupied Frequency Bandwidth NVNT_ANT2_802_11ac(VHT20)_5180



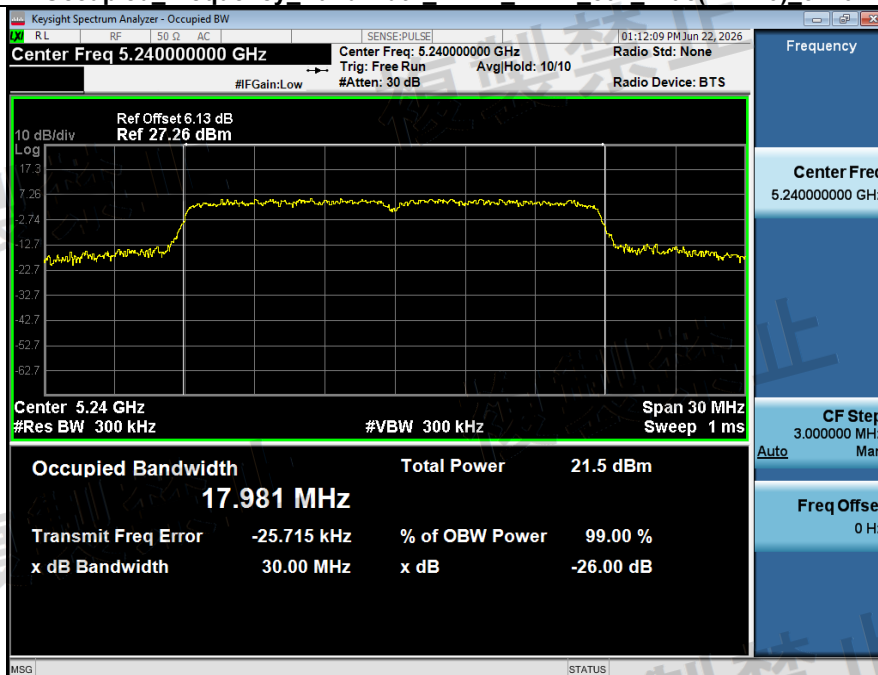
Occupied Frequency Bandwidth NVNT_ANT1_802_11ac(VHT20)_5200



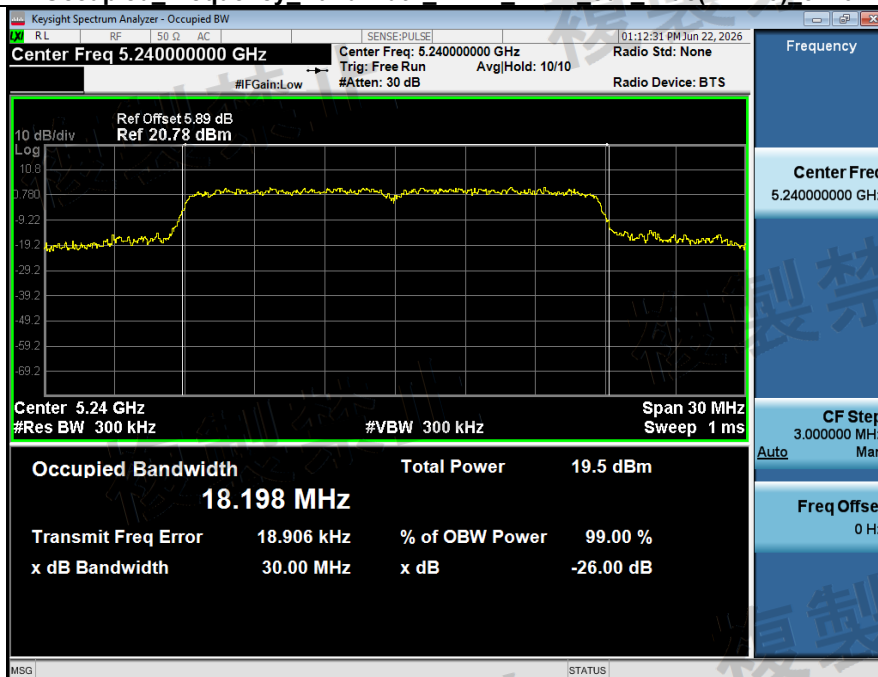
Occupied Frequency Bandwidth NVNT_ANT2_802_11ac(VHT20)_5200



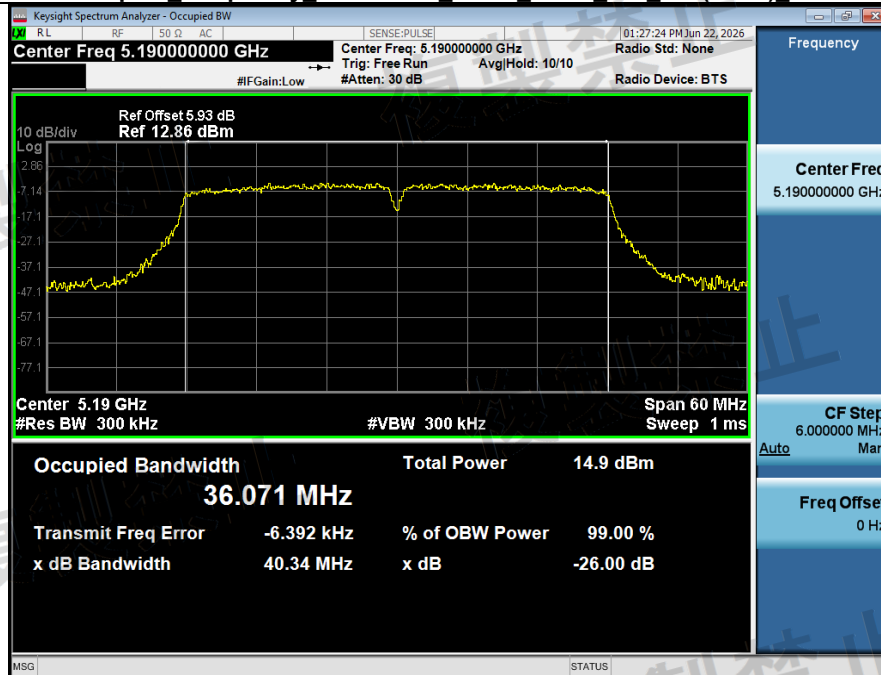
Occupied Frequency Bandwidth NVNT_ANT1_802_11ac(VHT20)_5240



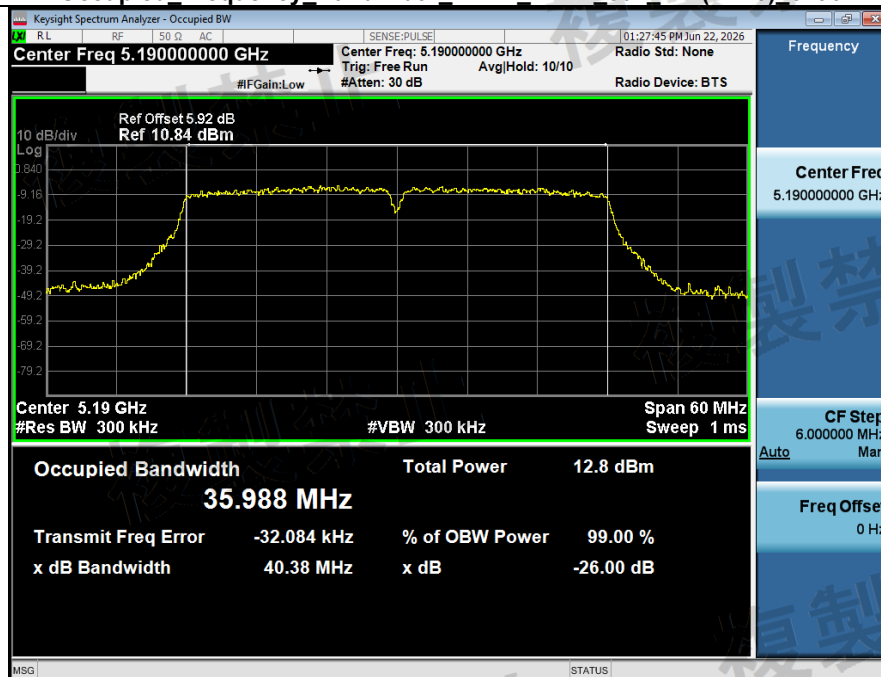
Occupied Frequency Bandwidth NVNT_ANT2_802_11ac(VHT20)_5240



Occupied Frequency Bandwidth NVNT_ANT1_802_11n(HT40)_5190

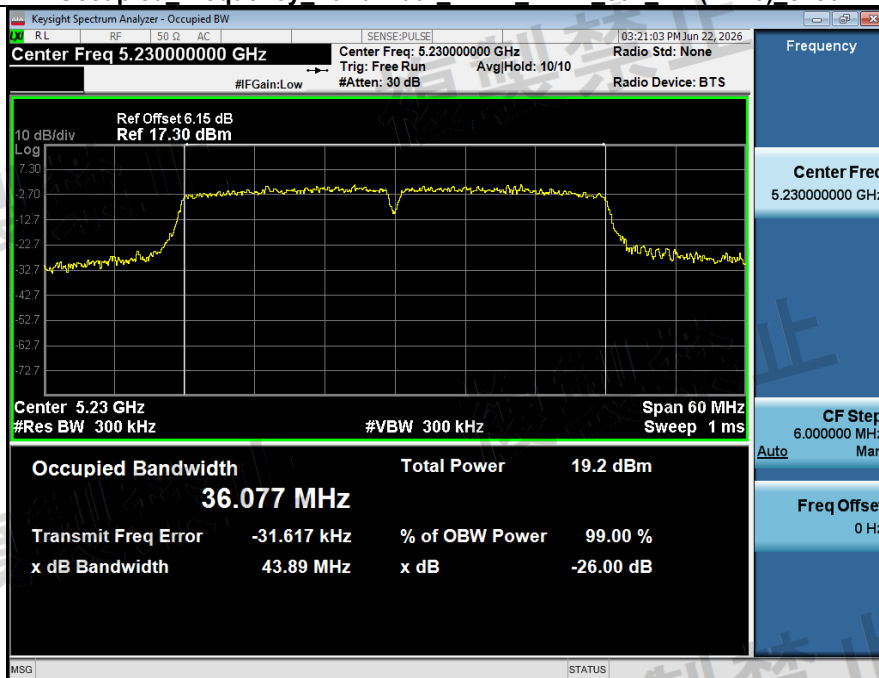


Occupied Frequency Bandwidth NVNT_ANT2_802_11n(HT40)_5190

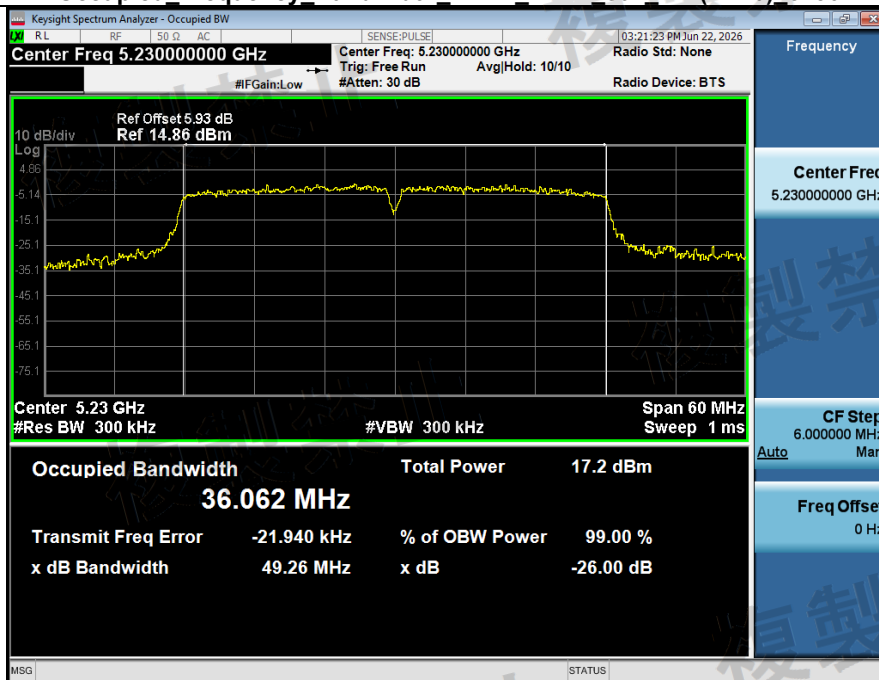




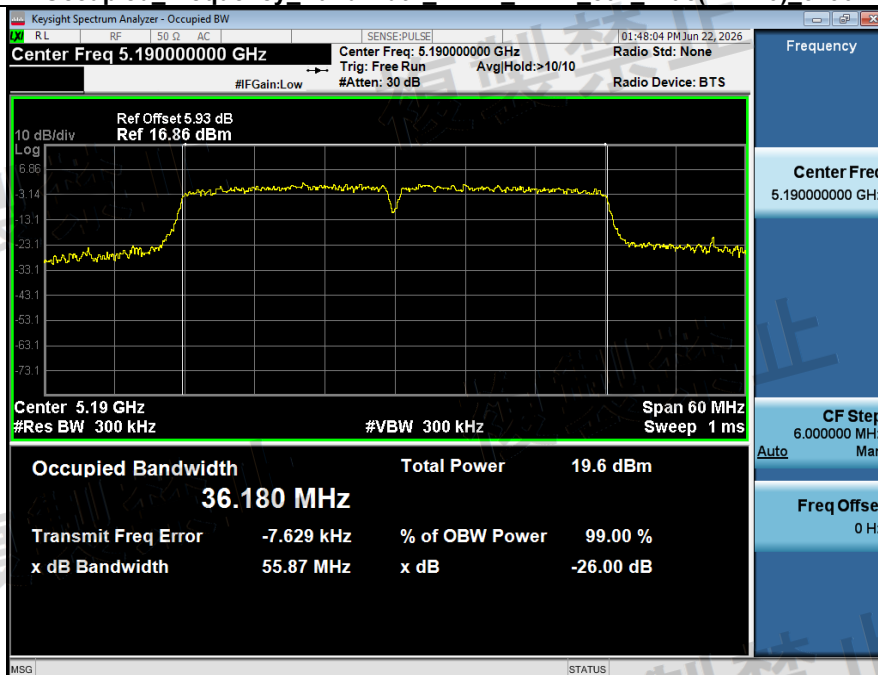
Occupied Frequency Bandwidth NVNT_ANT1_802_11n(HT40)_5230



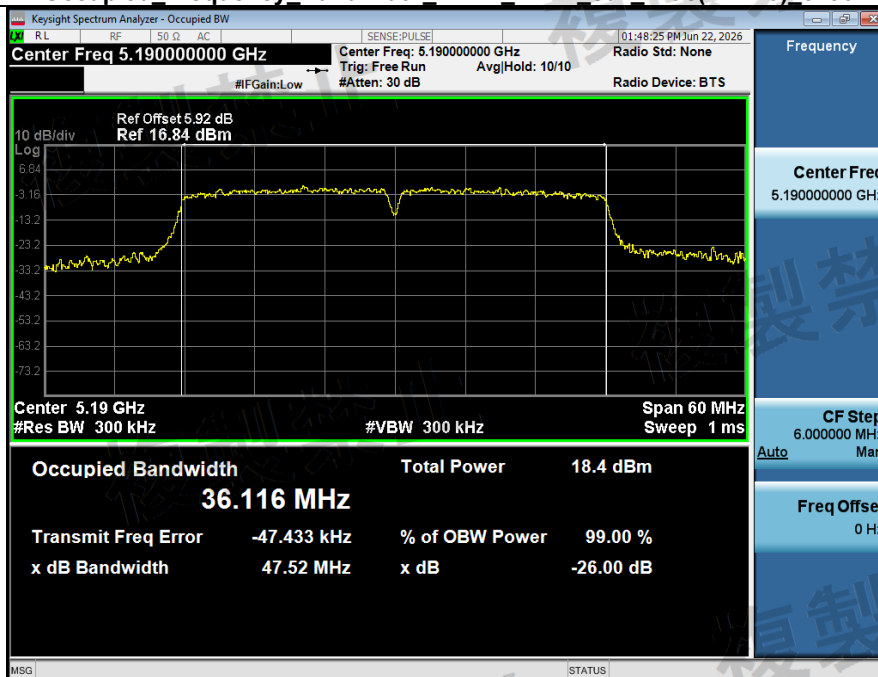
Occupied Frequency Bandwidth NVNT_ANT2_802_11n(HT40)_5230



Occupied Frequency Bandwidth NVNT_ANT1_802_11ac(VHT40)_5190

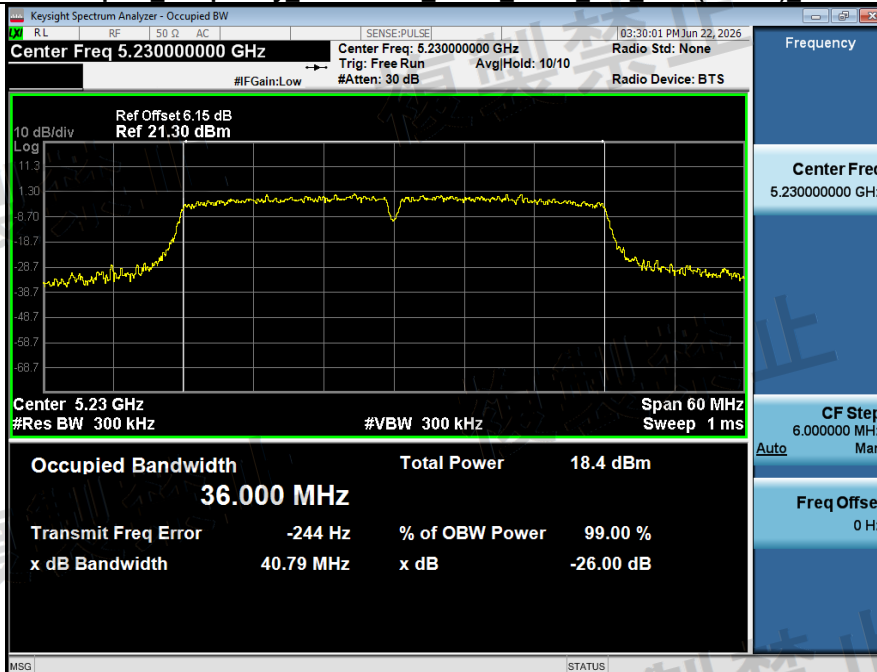


Occupied Frequency Bandwidth NVNT_ANT2_802_11ac(VHT40)_5190

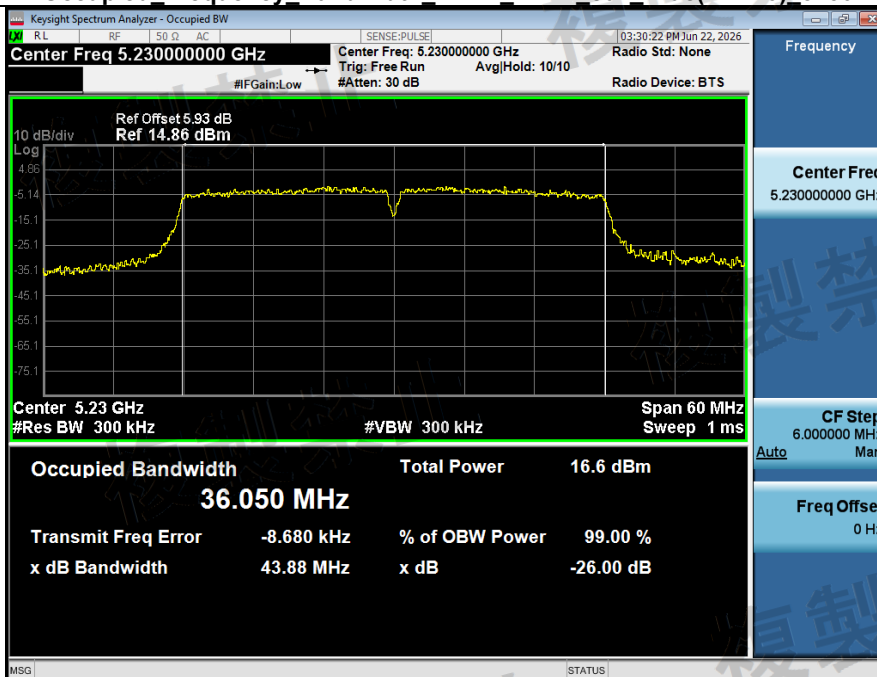




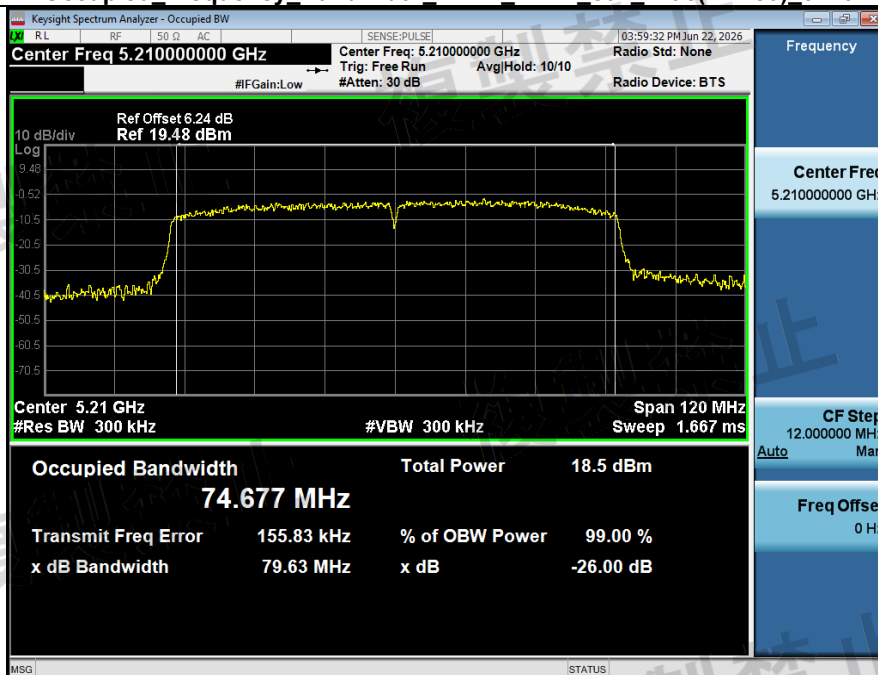
Occupied Frequency Bandwidth NVNT_ANT1_802_11ac(VHT40)_5230



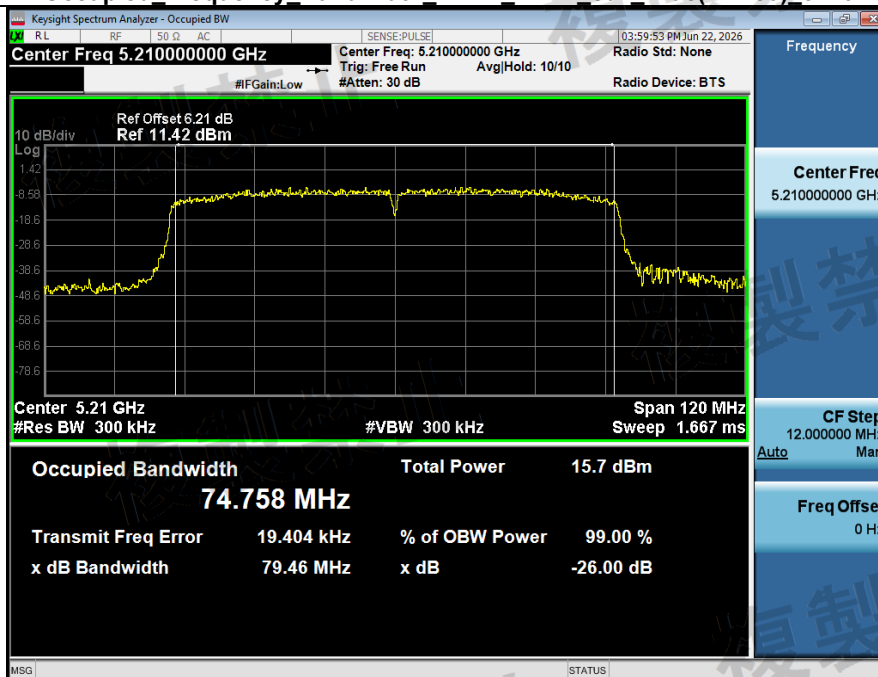
Occupied Frequency Bandwidth NVNT_ANT2_802_11ac(VHT40)_5230



Occupied Frequency Bandwidth NVNT_ANT1_802_11ac(VHT80)_5210



Occupied Frequency Bandwidth NVNT_ANT2_802_11ac(VHT80)_5210



Appendix A.4: Test Results of Unwanted Emission Strength

Test Result

Condition	Antenn a	Mode	TX Freq. (MHz)	Freq Range (MHz)	Spur. Freq. (MHz)	Amplitude (dBm/MHz)	Limit (dBm/MHz)	Spur. Level	Limit	Result
NVNT	ANT1	802.11a	5180.00	5140.0~5142.0	5140.360	-48.91	-26.00	0.0128µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11a	5180.00	5142.0~5150.0	5149.608	-47.99	-18.00	0.0159µW/MHz	15µW/MHz	Pass
NVNT	ANT1	802.11a	5180.00	5250.0~5250.2	5250.025	-51.20	2.67	0.000008mW/MHz	1.847850mW/MHz	Pass
NVNT	ANT1	802.11a	5180.00	5250.2~5251.0	5250.813	-49.37	-8.13	0.000012mW/MHz	0.153993mW/MHz	Pass
NVNT	ANT1	802.11a	5180.00	5251.0~5260.0	5256.100	-48.76	-14.53	0.000013mW/MHz	0.035210mW/MHz	Pass
NVNT	ANT1	802.11a	5180.00	5260.0~5266.7	5265.865	-48.07	-25.04	0.000016mW/MHz	0.003135mW/MHz	Pass
NVNT	ANT1	802.11a	5180.00	5266.7~5365.0	5312.597	-48.24	-26.00	0.0149µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11a	5180.00	30.0~5140.0	2444.734	-45.16	-26.00	0.0304µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11a	5180.00	5365.0~10000.0	5466.641	-45.03	-26.00	0.0314µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11a	5180.00	10000.0~26000.0	10000.000	-50.02	-26.00	0.0099µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11a	5180.00	5140.0~5142.0	5140.990	-48.47	-26.00	0.0142µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11a	5180.00	5142.0~5150.0	5149.203	-40.52	-18.00	0.0886µW/MHz	15µW/MHz	Pass
NVNT	ANT2	802.11a	5180.00	5250.0~5250.2	5250.092	-51.23	0.87	0.000008mW/MHz	1.220862mW/MHz	Pass
NVNT	ANT2	802.11a	5180.00	5250.2~5251.0	5250.835	-49.19	-8.35	0.000012mW/MHz	0.146218mW/MHz	Pass
NVNT	ANT2	802.11a	5180.00	5251.0~5260.0	5254.863	-46.95	-13.43	0.000020mW/MHz	0.045359mW/MHz	Pass
NVNT	ANT2	802.11a	5180.00	5260.0~5266.7	5263.345	-49.65	-22.01	0.000011mW/MHz	0.006289mW/MHz	Pass
NVNT	ANT2	802.11a	5180.00	5266.7~5365.0	5310.618	-48.02	-26.00	0.0157µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11a	5180.00	30.0~5140.0	2603.257	-44.09	-26.00	0.0390µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11a	5180.00	5365.0~10000.0	6160.553	-45.46	-26.00	0.0284µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11a	5180.00	10000.0~26000.0	10000.000	-50.14	-26.00	0.0096µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11a	5200.00	5140.0~5142.0	5140.698	-36.85	-26.00	0.2065µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11a	5200.00	5142.0~5150.0	5142.273	-36.64	-18.00	0.2165µW/MHz	15µW/MHz	Pass
NVNT	ANT1	802.11a	5200.00	5250.0~5250.2	5250.092	-34.73	0.87	0.000336mW/MHz	1.220862mW/MHz	Pass
NVNT	ANT1	802.11a	5200.00	5250.2~5251.0	5250.408	-34.14	-4.08	0.000385mW/MHz	0.391291mW/MHz	Pass
NVNT	ANT1	802.11a	5200.00	5251.0~5260.0	5253.153	-31.89	-11.91	0.000647mW/MHz	0.064368mW/MHz	Pass
NVNT	ANT1	802.11a	5200.00	5260.0~5266.7	5260.217	-35.19	-18.26	0.000303mW/MHz	0.014925mW/MHz	Pass
NVNT	ANT1	802.11a	5200.00	5266.7~5365.0	5268.047	-37.62	-26.00	0.1728µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11a	5200.00	30.0~5140.0	5129.655	-42.67	-26.00	0.0540µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11a	5200.00	5365.0~10000.0	5439.722	-46.17	-26.00	0.0241µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11a	5200.00	10000.0~26000.0	10000.000	-50.66	-26.00	0.0085µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11a	5200.00	5140.0~5142.0	5141.148	-41.48	-26.00	0.0710µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11a	5200.00	5142.0~5150.0	5148.550	-38.70	-18.00	0.1348µW/MHz	15µW/MHz	Pass
NVNT	ANT2	802.11a	5200.00	5250.0~5250.2	5250.002	-38.51	3.27	0.000141mW/MHz	2.121615mW/MHz	Pass
NVNT	ANT2	802.11a	5200.00	5250.2~5251.0	5250.408	-37.28	-4.08	0.000187mW/MHz	0.391291mW/MHz	Pass
NVNT	ANT2	802.11a	5200.00	5251.0~5260.0	5253.400	-36.00	-12.13	0.000251mW/MHz	0.061188mW/MHz	Pass
NVNT	ANT2	802.11a	5200.00	5260.0~5266.7	5260.443	-39.73	-18.53	0.000106mW/MHz	0.014025mW/MHz	Pass
NVNT	ANT2	802.11a	5200.00	5266.7~5365.0	5268.925	-40.90	-26.00	0.0813µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11a	5200.00	30.0~5140.0	5139.625	-42.83	-26.00	0.0520µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11a	5200.00	5365.0~10000.0	7168.520	-47.69	-26.00	0.0170µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11a	5200.00	10000.0~26000.0	10000.000	-50.25	-26.00	0.0094µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11a	5240.00	5140.0~5142.0	5141.238	-51.16	-26.00	0.0076µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11a	5240.00	5142.0~5150.0	5144.882	-50.79	-18.00	0.0083µW/MHz	15µW/MHz	Pass
NVNT	ANT1	802.11a	5240.00	5250.0~5250.2	5250.070	-20.82	1.47	0.008274mW/MHz	1.401737mW/MHz	Pass
NVNT	ANT1	802.11a	5240.00	5250.2~5251.0	5250.205	-23.05	-2.05	0.004952mW/MHz	0.623735mW/MHz	Pass
NVNT	ANT1	802.11a	5240.00	5251.0~5260.0	5251.150	-22.90	-10.13	0.005130mW/MHz	0.096977mW/MHz	Pass
NVNT	ANT1	802.11a	5240.00	5260.0~5266.7	5261.815	-31.50	-20.18	0.000708mW/MHz	0.009598mW/MHz	Pass
NVNT	ANT1	802.11a	5240.00	5266.7~5365.0	5266.743	-36.47	-26.00	0.2251µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11a	5240.00	30.0~5140.0	3191.487	-46.60	-26.00	0.0218µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11a	5240.00	5365.0~10000.0	5372.923	-47.21	-26.00	0.0189µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11a	5240.00	10000.0~26000.0	24424.000	-51.33	-26.00	0.0073µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11a	5240.00	5140.0~5142.0	5141.193	-49.28	-26.00	0.0118µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11a	5240.00	5142.0~5150.0	5146.255	-48.48	-18.00	0.0141µW/MHz	15µW/MHz	Pass
NVNT	ANT2	802.11a	5240.00	5250.0~5250.2	5250.092	-24.16	0.87	0.003839mW/MHz	1.220862mW/MHz	Pass
NVNT	ANT2	802.11a	5240.00	5250.2~5251.0	5250.970	-23.63	-9.70	0.004335mW/MHz	0.107152mW/MHz	Pass
NVNT	ANT2	802.11a	5240.00	5251.0~5260.0	5251.038	-24.43	-10.03	0.003608mW/MHz	0.099235mW/MHz	Pass
NVNT	ANT2	802.11a	5240.00	5260.0~5266.7	5260.307	-33.61	-18.37	0.000436mW/MHz	0.014558mW/MHz	Pass
NVNT	ANT2	802.11a	5240.00	5266.7~5365.0	5266.810	-36.54	-26.00	0.2220µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11a	5240.00	30.0~5140.0	3521.494	-45.53	-26.00	0.0280µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11a	5240.00	5365.0~10000.0	7270.214	-45.72	-26.00	0.0267µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11a	5240.00	10000.0~26000.0	24398.400	-51.48	-26.00	0.0071µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	5140.0~5142.0	5140.945	-29.64	-26.00	1.0872µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	5142.0~5150.0	5148.797	-23.24	-18.00	4.7409µW/MHz	15µW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	5250.0~5250.2	5250.002	-45.13	3.27	0.000031mW/MHz	2.121615mW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	5250.2~5251.0	5250.610	-43.79	-6.10	0.000042mW/MHz	0.245471mW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	5251.0~5260.0	5253.693	-43.18	-12.39	0.000048mW/MHz	0.057632mW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	5260.0~5266.7	5263.863	-42.53	-22.64	0.000056mW/MHz	0.005451mW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	5266.7~5365.0	5321.575	-47.03	-26.00	0.0198µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	30.0~5140.0	5139.625	-30.90	-26.00	0.8134µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	5365.0~10000.0	7154.562	-44.36	-26.00	0.0366µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	10000.0~26000.0	10000.000	-50.62	-26.00	0.0086µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5180.00	5140.0~5142.0	5141.012	-31.96	-26.00	0.6373µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5180.00	5142.0~5150.0	5149.292	-26.03	-18.00	2.4926µW/MHz	15µW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5180.00	5250.0~5250.2	5250.182	-49.42	-1.53	0.000011mW/MHz	0.702533mW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5180.00	5250.2~5251.0	5250.340	-46.26	-3.40	0.000024mW/MHz	0.457088mW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5180.00	5251.0~5260.0	5251.600	-46.67	-10.53	0.000022mW/MHz	0.088444mW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5180.00	5260.0~5266.7	5263.233	-47.69	-21.88	0.000017mW/MHz	0.006488mW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5180.00	5266.7~5365.0	5356.833	-46.97	-26.00	0.0200µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5180.00	30.0~5140.0	5136.634	-35.86	-26.00	0.2593µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5180.00	5365.0~10000.0	5867.435	-45.78	-26.00	0.0284µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5180.00	10000.0~26000.0	10000.000	-49.56	-26.00	0.0110µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	5140.0~5142.0	5141.642	-36.39	-26.00	0.2295µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	5142.0~5150.0	5148.392	-36.19	-18.00	0.2403µW/MHz	15µW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	5250.0~5250.2	5250.002	-29.01	3.27	0.001255mW/MHz	2.121615mW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	5250.2~5251.0	5250.273	-29.08	-2.73	0.001236mW/MHz	0.533949mW/MHz	Pass

NVNT	ANT1	802.11n(HT20)	5200.00	5251.0-5260.0	5256.573	-31.04	-14.95	0.000786mW/MHz	0.031964mW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	5260.0-5266.7	5263.165	-35.22	-21.80	0.000300mW/MHz	0.006610mW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	5266.7-5365.0	5268.858	-36.35	-26.00	0.2315µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	30.0-5140.0	5139.625	-42.32	-26.00	0.0585µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	5365.0-10000.0	6943.198	-46.17	-26.00	0.0241µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	10000.0-26000.0	24380.800	-50.69	-26.00	0.0085µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5200.00	5140.0-5142.0	5140.922	-38.20	-26.00	0.1513µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5200.00	5142.0-5150.0	5146.547	-37.17	-18.00	0.1917µW/MHz	15µW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5200.00	5250.0-5250.2	5250.115	-33.74	0.27	0.000423mW/MHz	1.063327mW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5200.00	5250.2-5251.0	5250.722	-31.72	-7.22	0.000674mW/MHz	0.189452mW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5200.00	5251.0-5260.0	5255.627	-32.74	-14.11	0.000532mW/MHz	0.038785mW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5200.00	5260.0-5266.7	5264.807	-40.33	-23.77	0.000093mW/MHz	0.004199mW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5200.00	5266.7-5365.0	5268.385	-39.08	-26.00	0.1236µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5200.00	30.0-5140.0	5138.628	-45.70	-26.00	0.0269µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5200.00	5365.0-10000.0	6333.034	-47.19	-26.00	0.0190µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5200.00	10000.0-26000.0	24307.200	-50.36	-26.00	0.0092µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	5140.0-5142.0	5140.877	-50.12	-26.00	0.0097µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	5142.0-5150.0	5145.760	-50.65	-18.00	0.0086µW/MHz	15µW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	5250.0-5250.2	5250.002	-16.21	3.27	0.023931mW/MHz	2.121615mW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	5250.2-5251.0	5250.205	-17.64	-2.05	0.017204mW/MHz	0.623735mW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	5251.0-5260.0	5251.600	-22.19	-10.53	0.006044mW/MHz	0.088444mW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	5260.0-5266.7	5260.015	-29.79	-18.02	0.001050mW/MHz	0.015783mW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	5266.7-5365.0	5269.127	-39.21	-26.00	0.1199µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	30.0-5140.0	5428.464	-44.99	-26.00	0.0316µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	5365.0-10000.0	5498.545	-47.18	-26.00	0.0191µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	10000.0-26000.0	24513.600	-51.34	-26.00	0.0073µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5240.00	5140.0-5142.0	5140.135	-50.50	-26.00	0.0089µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5240.00	5142.0-5150.0	5147.267	-49.30	-18.00	0.0117µW/MHz	15µW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5240.00	5250.0-5250.2	5250.002	-15.73	3.27	0.026734mW/MHz	2.121615mW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5240.00	5250.2-5251.0	5250.273	-18.99	-2.73	0.012614mW/MHz	0.533949mW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5240.00	5251.0-5260.0	5251.690	-22.53	-10.61	0.005587mW/MHz	0.086829mW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5240.00	5260.0-5266.7	5261.028	-34.15	-19.23	0.000385mW/MHz	0.011932mW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5240.00	5266.7-5365.0	5266.922	-37.86	-26.00	0.1638µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5240.00	30.0-5140.0	4539.431	-43.92	-26.00	0.0405µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5240.00	5365.0-10000.0	6353.971	-45.56	-26.00	0.0277µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11n(HT20)	5240.00	10000.0-26000.0	10000.000	-47.85	-26.00	0.0163µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	5140.0-5142.0	5140.765	-30.28	-26.00	0.9367µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	5142.0-5150.0	5147.448	-25.70	-18.00	2.6908µW/MHz	15µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	5250.0-5250.2	5250.070	-40.74	1.47	0.000084mW/MHz	1.401737mW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	5250.2-5251.0	5250.227	-37.75	-2.27	0.000168mW/MHz	0.592243mW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	5251.0-5260.0	5251.150	-37.33	-10.13	0.000185mW/MHz	0.096977mW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	5260.0-5266.7	5262.085	-40.63	-20.50	0.000086mW/MHz	0.008908mW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	5266.7-5365.0	5271.940	-46.46	-26.00	0.0226µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	30.0-5140.0	5135.637	-31.14	-26.00	0.7694µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	5365.0-10000.0	5424.767	-43.99	-26.00	0.0398µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	10000.0-26000.0	10000.000	-50.96	-26.00	0.0080µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT20)	5180.00	5140.0-5142.0	5141.575	-33.25	-26.00	0.4733µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT20)	5180.00	5142.0-5150.0	5146.930	-28.12	-18.00	1.5429µW/MHz	15µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT20)	5180.00	5250.0-5250.2	5250.002	-47.84	3.27	0.000016mW/MHz	2.121615mW/MHz	Pass
NVNT	ANT2	802.11ac(VHT20)	5180.00	5250.2-5251.0	5250.790	-44.65	-7.90	0.000034mW/MHz	0.062181mW/MHz	Pass
NVNT	ANT2	802.11ac(VHT20)	5180.00	5251.0-5260.0	5251.465	-43.58	-10.41	0.000044mW/MHz	0.090922mW/MHz	Pass
NVNT	ANT2	802.11ac(VHT20)	5180.00	5260.0-5266.7	5265.257	-45.47	-24.31	0.000028mW/MHz	0.003708mW/MHz	Pass
NVNT	ANT2	802.11ac(VHT20)	5180.00	5266.7-5365.0	5364.595	-47.53	-26.00	0.0176µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT20)	5180.00	30.0-5140.0	5136.634	-34.62	-26.00	0.3449µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT20)	5180.00	5365.0-10000.0	7121.661	-45.71	-26.00	0.0268µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT20)	5180.00	10000.0-26000.0	10000.000	-49.95	-26.00	0.0101µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	5140.0-5142.0	5140.630	-36.56	-26.00	0.2208µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	5142.0-5150.0	5149.967	-33.87	-18.00	0.4098µW/MHz	15µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	5250.0-5250.2	5250.002	-33.34	3.27	0.000463mW/MHz	2.121615mW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	5250.2-5251.0	5250.722	-32.68	-7.22	0.000540mW/MHz	0.189452mW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	5251.0-5260.0	5252.252	-32.26	-11.11	0.000595mW/MHz	0.077387mW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	5260.0-5266.7	5262.265	-36.44	-20.72	0.000227mW/MHz	0.008476mW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	5266.7-5365.0	5272.052	-39.31	-26.00	0.1172µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	30.0-5140.0	5138.628	-41.79	-26.00	0.0662µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	5365.0-10000.0	5446.701	-46.60	-26.00	0.0219µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	10000.0-26000.0	23923.200	-51.14	-26.00	0.0076µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT20)	5200.00	5140.0-5142.0	5140.855	-39.47	-26.00	0.1128µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT20)	5200.00	5142.0-5150.0	5147.538	-36.52	-18.00	0.2226µW/MHz	15µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT20)	5200.00	5250.0-5250.2	5250.182	-37.14	-1.53	0.000193mW/MHz	0.702533mW/MHz	Pass
NVNT	ANT2	802.11ac(VHT20)	5200.00	5250.2-5251.0	5250.767	-35.75	-7.67	0.000266mW/MHz	0.170805mW/MHz	Pass
NVNT	ANT2	802.11ac(VHT20)	5200.00	5251.0-5260.0	5252.770	-36.33	-11.57	0.000233mW/MHz	0.069609mW/MHz	Pass
NVNT	ANT2	802.11ac(VHT20)	5200.00	5260.0-5266.7	5260.150	-37.87	-18.18	0.000163mW/MHz	0.015205mW/MHz	Pass
NVNT	ANT2	802.11ac(VHT20)	5200.00	5266.7-5365.0	5269.330	-42.68	-26.00	0.0539µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT20)	5200.00	30.0-5140.0	5135.637	-43.61	-26.00	0.0436µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT20)	5200.00	5365.0-10000.0	6622.164	-48.00	-26.00	0.0158µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT20)	5200.00	10000.0-26000.0	24422.400	-50.81	-26.00	0.0083µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	5140.0-5142.0	5140.135	-50.97	-26.00	0.0079µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	5142.0-5150.0	5147.988	-51.28	-18.00	0.0074µW/MHz	15µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	5250.0-5250.2	5250.047	-17.56	2.07	0.017528mW/MHz	1.609410mW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	5250.2-5251.0	5250.273	-21.44	-2.73	0.007181mW/MHz	0.533949mW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	5251.0-5260.0	5251.015	-32.68	-10.01	0.000539mW/MHz	0.099693mW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	5260.0-5266.7	5260.195	-46.14	-18.23	0.000024mW/MHz	0.015018mW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	5266.7-5365.0	5275.090	-48.61	-26.00	0.0137µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	30.0-5140.0	3089.793	-46.44	-26.00	0.0227µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	5365.0-10000.0	5900.336	-47.66	-26.00	0.0171µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	10000.0-26000.0	10000.000	-49.04	-26.00	0.0124µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT20)	5240.00	5140.0-5142.0	5141.260	-50.37	-26.00	0.0091µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT20)	5240.00	5142.0-5150.0	5143.083	-48.70	-18.00	0.0134µW/MHz	15µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT20)	5240.00	5250.0-5250.2	5250.002	-19.07	3.27	0.012377mW/MHz	2.121615mW/MHz	Pass
NVNT	ANT2	802.11ac(VHT20)	5240.00	5250.2-5251.0	5250.250	-22.26	-2.50	0.005938mW/MHz	0.562341mW/MHz	Pass
NVNT	ANT2	802.11ac(VHT20)	5240.00	5251.0-5260.0	5251.015	-34.29</				

Prüfbericht - Produkte

Test Report - Products

NVNT	ANT2	802.11ac(VHT20)	5240.00	30.0-5140.0	1774.750	-40.30	-26.00	0.0932µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT20)	5240.00	5365.0-10000.0	7527.440	-46.03	-26.00	0.0249µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT20)	5240.00	10000.0-26000.0	10000.000	-51.17	-26.00	0.0076µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	5100.0-5141.6	5139.870	-38.57	-26.00	0.1389µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	5141.6-5150.0	5147.400	-33.38	-18.00	0.4588µW/MHz	15µW/MHz	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	5250.0-5251.0	5250.990	-42.35	-12.91	0.000058mW/MHz	0.051165mW/MHz	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	5251.0-5270.0	5256.630	-40.52	-15.38	0.000089mW/MHz	0.028968mW/MHz	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	5270.0-5278.4	5272.770	-46.48	-22.67	0.000022mW/MHz	0.005405mW/MHz	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	5278.4-5400.0	5279.430	-45.76	-26.00	0.0265µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	30.0-5100.0	4543.419	-42.34	-26.00	0.0583µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	5400.0-10000.0	5738.822	-44.92	-26.00	0.0322µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	10000.0-26000.0	10000.000	-51.06	-26.00	0.0078µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11n(HT40)	5190.00	5100.0-5141.6	5140.950	-44.16	-26.00	0.0383µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11n(HT40)	5190.00	5141.6-5150.0	5147.070	-38.90	-18.00	0.1287µW/MHz	15µW/MHz	Pass
NVNT	ANT2	802.11n(HT40)	5190.00	5250.0-5251.0	5250.420	-47.51	-7.21	0.000018mW/MHz	0.190095mW/MHz	Pass
NVNT	ANT2	802.11n(HT40)	5190.00	5251.0-5270.0	5254.830	-46.82	-14.62	0.000021mW/MHz	0.034491mW/MHz	Pass
NVNT	ANT2	802.11n(HT40)	5190.00	5270.0-5278.4	5274.480	-49.06	-23.70	0.000012mW/MHz	0.004267mW/MHz	Pass
NVNT	ANT2	802.11n(HT40)	5190.00	5278.4-5400.0	5319.660	-48.36	-26.00	0.0145µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11n(HT40)	5190.00	30.0-5100.0	4542.422	-42.28	-26.00	0.0591µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11n(HT40)	5190.00	5400.0-10000.0	6057.862	-45.97	-26.00	0.0253µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11n(HT40)	5190.00	10000.0-26000.0	24486.400	-51.16	-26.00	0.0076µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	5100.0-5141.6	5140.260	-47.71	-26.00	0.0169µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	5141.6-5150.0	5148.420	-48.86	-18.00	0.0129µW/MHz	15µW/MHz	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	5250.0-5251.0	5250.180	-13.64	-4.81	0.043241mW/MHz	0.330347mW/MHz	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	5251.0-5270.0	5251.530	-17.87	-13.23	0.016337mW/MHz	0.047496mW/MHz	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	5270.0-5278.4	5272.500	-28.06	-22.51	0.001563mW/MHz	0.005610mW/MHz	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	5278.4-5400.0	5278.680	-30.96	-26.00	0.8018µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	30.0-5100.0	2486.608	-46.21	-26.00	0.0239µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	5400.0-10000.0	6716.879	-47.14	-26.00	0.0193µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	10000.0-26000.0	23838.400	-50.86	-26.00	0.0082µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11n(HT40)	5230.00	5100.0-5141.6	5130.540	-47.19	-26.00	0.0190µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11n(HT40)	5230.00	5141.6-5150.0	5147.820	-43.60	-18.00	0.0436µW/MHz	15µW/MHz	Pass
NVNT	ANT2	802.11n(HT40)	5230.00	5250.0-5251.0	5250.000	-16.12	-3.01	0.024435mW/MHz	0.500000mW/MHz	Pass
NVNT	ANT2	802.11n(HT40)	5230.00	5251.0-5270.0	5253.000	-20.00	-13.85	0.010005mW/MHz	0.041187mW/MHz	Pass
NVNT	ANT2	802.11n(HT40)	5230.00	5270.0-5278.4	5271.900	-28.24	-22.15	0.001501mW/MHz	0.006095mW/MHz	Pass
NVNT	ANT2	802.11n(HT40)	5230.00	5278.4-5400.0	5278.950	-33.38	-26.00	0.4590µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11n(HT40)	5230.00	30.0-5100.0	4542.422	-44.21	-26.00	0.0378µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11n(HT40)	5230.00	5400.0-10000.0	5859.459	-44.18	-26.00	0.0381µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11n(HT40)	5230.00	10000.0-26000.0	10000.000	-51.44	-26.00	0.0071µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	5100.0-5141.6	5135.610	-30.16	-26.00	0.9645µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	5141.6-5150.0	5147.880	-25.52	-18.00	2.8024µW/MHz	15µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	5250.0-5251.0	5250.270	-32.69	-5.71	0.000539mW/MHz	0.268516mW/MHz	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	5251.0-5270.0	5252.820	-30.10	-13.78	0.000977mW/MHz	0.041912mW/MHz	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	5270.0-5278.4	5276.310	-36.90	-24.80	0.000204mW/MHz	0.003314mW/MHz	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	5278.4-5400.0	5280.930	-37.87	-26.00	0.1631µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	30.0-5100.0	5098.748	-43.94	-26.00	0.0403µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	5400.0-10000.0	5427.758	-45.07	-26.00	0.0310µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	10000.0-26000.0	24412.800	-50.93	-26.00	0.0080µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT40)	5190.00	5100.0-5141.6	5141.370	-32.66	-26.00	0.5420µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT40)	5190.00	5141.6-5150.0	5147.010	-27.13	-18.00	1.9377µW/MHz	15µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT40)	5190.00	5250.0-5251.0	5250.960	-35.40	-12.61	0.000288mW/MHz	0.054824mW/MHz	Pass
NVNT	ANT2	802.11ac(VHT40)	5190.00	5251.0-5270.0	5253.540	-34.45	-14.08	0.000359mW/MHz	0.039086mW/MHz	Pass
NVNT	ANT2	802.11ac(VHT40)	5190.00	5270.0-5278.4	5275.980	-38.95	-24.60	0.000127mW/MHz	0.003469mW/MHz	Pass
NVNT	ANT2	802.11ac(VHT40)	5190.00	5278.4-5400.0	5278.410	-41.82	-26.00	0.0657µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT40)	5190.00	30.0-5100.0	2630.176	-45.42	-26.00	0.0287µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT40)	5190.00	5400.0-10000.0	6266.235	-45.18	-26.00	0.0303µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT40)	5190.00	10000.0-26000.0	24305.600	-50.08	-26.00	0.0098µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	5100.0-5141.6	5106.360	-49.51	-26.00	0.0111µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	5141.6-5150.0	5144.430	-49.55	-18.00	0.0110µW/MHz	15µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	5250.0-5251.0	5250.150	-21.81	-4.51	0.006589mW/MHz	0.353973mW/MHz	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	5251.0-5270.0	5251.200	-26.18	-13.09	0.002408mW/MHz	0.049040mW/MHz	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	5270.0-5278.4	5276.940	-43.13	-25.17	0.000049mW/MHz	0.003038mW/MHz	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	5278.4-5400.0	5295.690	-47.36	-26.00	0.0183µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	30.0-5100.0	4542.422	-44.51	-26.00	0.0354µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	5400.0-10000.0	5595.254	-47.31	-26.00	0.0185µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	10000.0-26000.0	24393.600	-50.27	-26.00	0.0093µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT40)	5230.00	5100.0-5141.6	5135.880	-48.19	-26.00	0.0151µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT40)	5230.00	5141.6-5150.0	5149.470	-48.65	-18.00	0.0136µW/MHz	15µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT40)	5230.00	5250.0-5251.0	5250.120	-19.65	-4.21	0.010835mW/MHz	0.379289mW/MHz	Pass
NVNT	ANT2	802.11ac(VHT40)	5230.00	5251.0-5270.0	5251.020	-27.19	-13.02	0.001908mW/MHz	0.049903mW/MHz	Pass
NVNT	ANT2	802.11ac(VHT40)	5230.00	5270.0-5278.4	5275.050	-43.79	-24.04	0.000042mW/MHz	0.003944mW/MHz	Pass
NVNT	ANT2	802.11ac(VHT40)	5230.00	5278.4-5400.0	5286.510	-47.12	-26.00	0.0193µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT40)	5230.00	30.0-5100.0	4528.464	-42.42	-26.00	0.0572µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT40)	5230.00	5400.0-10000.0	7077.793	-44.99	-26.00	0.0316µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT40)	5230.00	10000.0-26000.0	10000.000	-49.85	-26.00	0.0103µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	5100.0-5123.2	5121.318	-40.63	-26.00	0.0865µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	5123.2-5150.0	5145.866	-31.71	-18.00	0.6752µW/MHz	15µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	5250.0-5251.0	5250.556	-20.22	-11.58	0.009499mW/MHz	0.069493mW/MHz	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	5251.0-5290.0	5251.734	-20.49	-16.17	0.008923mW/MHz	0.024148mW/MHz	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	5290.0-5296.7	5295.928	-30.57	-25.80	0.000877mW/MHz	0.002631mW/MHz	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	5296.7-5480.0	5297.980	-32.56	-26.00	0.5543µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	30.0-5100.0	5097.751	-45.89	-26.00	0.0257µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	5480.0-10000.0	6830.537	-47.30	-26.00	0.0186µW/MHz	2.5µW/MHz	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	10000.0-26000.0	24286.400	-51.35	-26.00	0.0073µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT80)	5210.00	5100.0-5123.2	5115.504	-43.95	-26.00	0.0402µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT80)	5210.00	5123.2-5150.0	5144.536	-38.21	-18.00	0.1509µW/MHz	15µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT80)	5210.00	5250.0-5251.0	5250.062	-20.97	-6.64	0.007993mW/MHz	0.216740mW/MHz	Pass
NVNT	ANT2	802.11ac(VHT80)	5210.00	5251.0-5290.0	5251.354	-26.02	-16.09	0.002503mW/MHz	0.024585mW/MHz	Pass
NVNT	ANT2	802.11ac(VHT80)	5210.00	5290.0-5296.7	5295.662	-38.18	-25.72	0.000152mW/MHz	0.002680mW/MHz	Pass
NVNT	ANT2	802.11ac(VHT80)	5210.00	5296.7-5480.0	5305.352	-39.25	-26.00	0.1188µW/MHz	2.5µW/MHz	Pass
NVNT	ANT2	802.11ac(VHT80)	5210.00	30.0-5100.0	192.511	-46.51	-26.00	0		

MOMO Mode(1/2 Limit)

Antenna	Mode	TX Freq. (MHz)	Freq Range (MHz)	Spur. Freq. (MHz)	Amplitude (dBm)	Limit (dBm)	1/2 Limit (dBm)	Result
ANT1	802.11n(HT20)	5180.00	5140.0~5142.0	5140.945	-29.64	-26.00	-29.01	Pass
ANT1	802.11n(HT20)	5180.00	5142.0~5150.0	5148.797	-23.24	-18.00	-21.01	Pass
ANT1	802.11n(HT20)	5180.00	5250.0~5250.2	5250.002	-45.13	3.27	0.26	Pass
ANT1	802.11n(HT20)	5180.00	5250.2~5251.0	5250.610	-43.79	-6.10	-9.11	Pass
ANT1	802.11n(HT20)	5180.00	5251.0~5260.0	5253.693	-43.18	-12.39	-15.40	Pass
ANT1	802.11n(HT20)	5180.00	5260.0~5266.7	5263.863	-42.53	-22.64	-25.65	Pass
ANT1	802.11n(HT20)	5180.00	5266.7~5365.0	5321.575	-47.03	-26.00	-29.01	Pass
ANT1	802.11n(HT20)	5180.00	30.0~5140.0	5139.625	-30.90	-26.00	-29.01	Pass
ANT1	802.11n(HT20)	5180.00	5365.0~10000.0	7154.562	-44.36	-26.00	-29.01	Pass
ANT1	802.11n(HT20)	5180.00	10000.0~26000.0	10000.000	-50.62	-26.00	-29.01	Pass
ANT2	802.11n(HT20)	5180.00	5140.0~5142.0	5141.012	-31.96	-26.00	-29.01	Pass
ANT2	802.11n(HT20)	5180.00	5142.0~5150.0	5149.292	-26.03	-18.00	-21.01	Pass
ANT2	802.11n(HT20)	5180.00	5250.0~5250.2	5250.182	-49.42	-1.53	-4.54	Pass
ANT2	802.11n(HT20)	5180.00	5250.2~5251.0	5250.340	-46.26	-3.40	-6.41	Pass
ANT2	802.11n(HT20)	5180.00	5251.0~5260.0	5251.600	-46.67	-10.53	-13.54	Pass
ANT2	802.11n(HT20)	5180.00	5260.0~5266.7	5263.233	-47.69	-21.88	-24.89	Pass
ANT2	802.11n(HT20)	5180.00	5266.7~5365.0	5356.833	-46.97	-26.00	-29.01	Pass
ANT2	802.11n(HT20)	5180.00	30.0~5140.0	5136.634	-35.86	-26.00	-29.01	Pass
ANT2	802.11n(HT20)	5180.00	5365.0~10000.0	5867.435	-45.78	-26.00	-29.01	Pass
ANT2	802.11n(HT20)	5180.00	10000.0~26000.0	10000.000	-49.56	-26.00	-29.01	Pass
ANT1	802.11n(HT20)	5200.00	5140.0~5142.0	5141.642	-36.39	-26.00	-29.01	Pass
ANT1	802.11n(HT20)	5200.00	5142.0~5150.0	5148.392	-36.19	-18.00	-21.01	Pass
ANT1	802.11n(HT20)	5200.00	5250.0~5250.2	5250.002	-29.01	3.27	0.26	Pass
ANT1	802.11n(HT20)	5200.00	5250.2~5251.0	5250.273	-29.08	-2.73	-5.74	Pass
ANT1	802.11n(HT20)	5200.00	5251.0~5260.0	5256.573	-31.04	-14.95	-17.96	Pass
ANT1	802.11n(HT20)	5200.00	5260.0~5266.7	5263.165	-35.22	-21.80	-24.81	Pass
ANT1	802.11n(HT20)	5200.00	5266.7~5365.0	5268.858	-36.35	-26.00	-29.01	Pass
ANT1	802.11n(HT20)	5200.00	30.0~5140.0	5139.625	-42.32	-26.00	-29.01	Pass
ANT1	802.11n(HT20)	5200.00	5365.0~10000.0	6943.198	-46.17	-26.00	-29.01	Pass
ANT1	802.11n(HT20)	5200.00	10000.0~26000.0	24380.800	-50.69	-26.00	-29.01	Pass
ANT2	802.11n(HT20)	5200.00	5140.0~5142.0	5140.922	-38.20	-26.00	-29.01	Pass
ANT2	802.11n(HT20)	5200.00	5142.0~5150.0	5146.547	-37.17	-18.00	-21.01	Pass
ANT2	802.11n(HT20)	5200.00	5250.0~5250.2	5250.115	-33.74	0.27	-2.74	Pass
ANT2	802.11n(HT20)	5200.00	5250.2~5251.0	5250.722	-31.72	-7.22	-10.23	Pass
ANT2	802.11n(HT20)	5200.00	5251.0~5260.0	5255.627	-32.74	-14.11	-17.12	Pass
ANT2	802.11n(HT20)	5200.00	5260.0~5266.7	5264.807	-40.33	-23.77	-26.78	Pass
ANT2	802.11n(HT20)	5200.00	5266.7~5365.0	5268.385	-39.08	-26.00	-29.01	Pass
ANT2	802.11n(HT20)	5200.00	30.0~5140.0	5138.628	-45.70	-26.00	-29.01	Pass
ANT2	802.11n(HT20)	5200.00	5365.0~10000.0	6333.034	-47.19	-26.00	-29.01	Pass
ANT2	802.11n(HT20)	5200.00	10000.0~26000.0	24307.200	-50.36	-26.00	-29.01	Pass
ANT1	802.11n(HT20)	5240.00	5140.0~5142.0	5140.877	-50.12	-26.00	-29.01	Pass
ANT1	802.11n(HT20)	5240.00	5142.0~5150.0	5145.760	-50.65	-18.00	-21.01	Pass
ANT1	802.11n(HT20)	5240.00	5250.0~5250.2	5250.002	-16.21	3.27	0.26	Pass
ANT1	802.11n(HT20)	5240.00	5250.2~5251.0	5250.205	-17.64	-2.05	-5.06	Pass
ANT1	802.11n(HT20)	5240.00	5251.0~5260.0	5251.600	-22.19	-10.53	-13.54	Pass
ANT1	802.11n(HT20)	5240.00	5260.0~5266.7	5260.015	-29.79	-18.02	-21.03	Pass
ANT1	802.11n(HT20)	5240.00	5266.7~5365.0	5269.127	-39.21	-26.00	-29.01	Pass
ANT1	802.11n(HT20)	5240.00	30.0~5140.0	4528.464	-44.99	-26.00	-29.01	Pass
ANT1	802.11n(HT20)	5240.00	5365.0~10000.0	5498.545	-47.18	-26.00	-29.01	Pass
ANT1	802.11n(HT20)	5240.00	10000.0~26000.0	24513.600	-51.34	-26.00	-29.01	Pass
ANT2	802.11n(HT20)	5240.00	5140.0~5142.0	5140.135	-50.50	-26.00	-29.01	Pass
ANT2	802.11n(HT20)	5240.00	5142.0~5150.0	5147.267	-49.30	-18.00	-21.01	Pass
ANT2	802.11n(HT20)	5240.00	5250.0~5250.2	5250.002	-15.73	3.27	0.26	Pass
ANT2	802.11n(HT20)	5240.00	5250.2~5251.0	5250.273	-18.99	-2.73	-5.74	Pass
ANT2	802.11n(HT20)	5240.00	5251.0~5260.0	5251.690	-22.53	-10.61	-13.62	Pass
ANT2	802.11n(HT20)	5240.00	5260.0~5266.7	5261.028	-34.15	-19.23	-22.24	Pass
ANT2	802.11n(HT20)	5240.00	5266.7~5365.0	5266.922	-37.86	-26.00	-29.01	Pass
ANT2	802.11n(HT20)	5240.00	30.0~5140.0	4539.431	-43.92	-26.00	-29.01	Pass
ANT2	802.11n(HT20)	5240.00	5365.0~10000.0	6353.971	-45.56	-26.00	-29.01	Pass
ANT2	802.11n(HT20)	5240.00	10000.0~26000.0	10000.000	-47.85	-26.00	-29.01	Pass
ANT1	802.11ac(VHT20)	5180.00	5140.0~5142.0	5140.765	-30.28	-26.00	-29.01	Pass
ANT1	802.11ac(VHT20)	5180.00	5142.0~5150.0	5147.448	-25.70	-18.00	-21.01	Pass
ANT1	802.11ac(VHT20)	5180.00	5250.0~5250.2	5250.070	-40.74	1.47	-1.54	Pass
ANT1	802.11ac(VHT20)	5180.00	5250.2~5251.0	5250.227	-37.75	-2.27	-5.28	Pass
ANT1	802.11ac(VHT20)	5180.00	5251.0~5260.0	5251.150	-37.33	-10.13	-13.14	Pass
ANT1	802.11ac(VHT20)	5180.00	5260.0~5266.7	5262.085	-40.63	-20.50	-23.51	Pass
ANT1	802.11ac(VHT20)	5180.00	5266.7~5365.0	5271.940	-46.46	-26.00	-29.01	Pass



ANT1	802.11ac(VHT20)	5180.00	30.0~5140.0	5135.637	-31.14	-26.00	-29.01	Pass
ANT1	802.11ac(VHT20)	5180.00	5365.0~10000.0	5424.767	-43.99	-26.00	-29.01	Pass
ANT1	802.11ac(VHT20)	5180.00	10000.0~26000.0	10000.000	-50.96	-26.00	-29.01	Pass
ANT2	802.11ac(VHT20)	5180.00	5140.0~5142.0	5141.575	-33.25	-26.00	-29.01	Pass
ANT2	802.11ac(VHT20)	5180.00	5142.0~5150.0	5146.930	-28.12	-18.00	-21.01	Pass
ANT2	802.11ac(VHT20)	5180.00	5250.0~5250.2	5250.002	-47.84	3.27	0.26	Pass
ANT2	802.11ac(VHT20)	5180.00	5250.2~5251.0	5250.790	-44.65	-7.90	-10.91	Pass
ANT2	802.11ac(VHT20)	5180.00	5251.0~5260.0	5251.465	-43.58	-10.41	-13.42	Pass
ANT2	802.11ac(VHT20)	5180.00	5260.0~5266.7	5265.257	-45.47	-24.31	-27.32	Pass
ANT2	802.11ac(VHT20)	5180.00	5266.7~5365.0	5364.595	-47.53	-26.00	-29.01	Pass
ANT2	802.11ac(VHT20)	5180.00	30.0~5140.0	5136.634	-34.62	-26.00	-29.01	Pass
ANT2	802.11ac(VHT20)	5180.00	5365.0~10000.0	7121.661	-45.71	-26.00	-29.01	Pass
ANT2	802.11ac(VHT20)	5180.00	10000.0~26000.0	10000.000	-49.95	-26.00	-29.01	Pass
ANT1	802.11ac(VHT20)	5200.00	5140.0~5142.0	5140.630	-36.56	-26.00	-29.01	Pass
ANT1	802.11ac(VHT20)	5200.00	5142.0~5150.0	5149.967	-33.87	-18.00	-21.01	Pass
ANT1	802.11ac(VHT20)	5200.00	5250.0~5250.2	5250.002	-33.34	3.27	0.26	Pass
ANT1	802.11ac(VHT20)	5200.00	5250.2~5251.0	5250.722	-32.68	-7.22	-10.23	Pass
ANT1	802.11ac(VHT20)	5200.00	5251.0~5260.0	5252.252	-32.26	-11.11	-14.12	Pass
ANT1	802.11ac(VHT20)	5200.00	5260.0~5266.7	5262.265	-36.44	-20.72	-23.73	Pass
ANT1	802.11ac(VHT20)	5200.00	5266.7~5365.0	5272.052	-39.31	-26.00	-29.01	Pass
ANT1	802.11ac(VHT20)	5200.00	30.0~5140.0	5138.628	-41.79	-26.00	-29.01	Pass
ANT1	802.11ac(VHT20)	5200.00	5365.0~10000.0	5446.701	-46.60	-26.00	-29.01	Pass
ANT1	802.11ac(VHT20)	5200.00	10000.0~26000.0	23923.200	-51.14	-26.00	-29.01	Pass
ANT2	802.11ac(VHT20)	5200.00	5140.0~5142.0	5140.855	-39.47	-26.00	-29.01	Pass
ANT2	802.11ac(VHT20)	5200.00	5142.0~5150.0	5147.538	-36.52	-18.00	-21.01	Pass
ANT2	802.11ac(VHT20)	5200.00	5250.0~5250.2	5250.182	-37.14	-1.53	-4.54	Pass
ANT2	802.11ac(VHT20)	5200.00	5250.2~5251.0	5250.767	-35.75	-7.67	-10.68	Pass
ANT2	802.11ac(VHT20)	5200.00	5251.0~5260.0	5252.770	-36.33	-11.57	-14.58	Pass
ANT2	802.11ac(VHT20)	5200.00	5260.0~5266.7	5260.150	-37.87	-18.18	-21.19	Pass
ANT2	802.11ac(VHT20)	5200.00	5266.7~5365.0	5269.330	-42.68	-26.00	-29.01	Pass
ANT2	802.11ac(VHT20)	5200.00	30.0~5140.0	5135.637	-43.61	-26.00	-29.01	Pass
ANT2	802.11ac(VHT20)	5200.00	5365.0~10000.0	6622.164	-48.00	-26.00	-29.01	Pass
ANT2	802.11ac(VHT20)	5200.00	10000.0~26000.0	24422.400	-50.81	-26.00	-29.01	Pass
ANT1	802.11ac(VHT20)	5240.00	5140.0~5142.0	5140.135	-50.97	-26.00	-29.01	Pass
ANT1	802.11ac(VHT20)	5240.00	5142.0~5150.0	5147.988	-51.28	-18.00	-21.01	Pass
ANT1	802.11ac(VHT20)	5240.00	5250.0~5250.2	5250.047	-17.56	2.07	-0.94	Pass
ANT1	802.11ac(VHT20)	5240.00	5250.2~5251.0	5250.273	-21.44	-2.73	-5.74	Pass
ANT1	802.11ac(VHT20)	5240.00	5251.0~5260.0	5251.015	-32.68	-10.01	-13.02	Pass
ANT1	802.11ac(VHT20)	5240.00	5260.0~5266.7	5260.195	-46.14	-18.23	-21.24	Pass
ANT1	802.11ac(VHT20)	5240.00	5266.7~5365.0	5275.090	-48.61	-26.00	-29.01	Pass
ANT1	802.11ac(VHT20)	5240.00	30.0~5140.0	3089.793	-46.44	-26.00	-29.01	Pass
ANT1	802.11ac(VHT20)	5240.00	5365.0~10000.0	5900.336	-47.66	-26.00	-29.01	Pass
ANT1	802.11ac(VHT20)	5240.00	10000.0~26000.0	10000.000	-49.04	-26.00	-29.01	Pass
ANT2	802.11ac(VHT20)	5240.00	5140.0~5142.0	5141.260	-50.37	-26.00	-29.01	Pass
ANT2	802.11ac(VHT20)	5240.00	5142.0~5150.0	5143.083	-48.70	-18.00	-21.01	Pass
ANT2	802.11ac(VHT20)	5240.00	5250.0~5250.2	5250.002	-19.07	3.27	0.26	Pass
ANT2	802.11ac(VHT20)	5240.00	5250.2~5251.0	5250.250	-22.26	-2.50	-5.51	Pass
ANT2	802.11ac(VHT20)	5240.00	5251.0~5260.0	5251.015	-34.29	-10.01	-13.02	Pass
ANT2	802.11ac(VHT20)	5240.00	5260.0~5266.7	5260.060	-43.33	-18.07	-21.08	Pass
ANT2	802.11ac(VHT20)	5240.00	5266.7~5365.0	5286.677	-47.82	-26.00	-29.01	Pass
ANT2	802.11ac(VHT20)	5240.00	30.0~5140.0	1774.750	-40.30	-26.00	-29.01	Pass
ANT2	802.11ac(VHT20)	5240.00	5365.0~10000.0	7527.440	-46.03	-26.00	-29.01	Pass
ANT2	802.11ac(VHT20)	5240.00	10000.0~26000.0	10000.000	-51.17	-26.00	-29.01	Pass
ANT1	802.11n(HT40)	5190.00	5100.0~5141.6	5139.870	-38.57	-26.00	-29.01	Pass
ANT1	802.11n(HT40)	5190.00	5141.6~5150.0	5147.400	-33.38	-18.00	-21.01	Pass
ANT1	802.11n(HT40)	5190.00	5250.0~5251.0	5250.990	-42.35	-12.91	-15.92	Pass
ANT1	802.11n(HT40)	5190.00	5251.0~5270.0	5256.630	-40.52	-15.38	-18.39	Pass
ANT1	802.11n(HT40)	5190.00	5270.0~5278.4	5272.770	-46.48	-22.67	-25.68	Pass
ANT1	802.11n(HT40)	5190.00	5278.4~5400.0	5279.430	-45.76	-26.00	-29.01	Pass
ANT1	802.11n(HT40)	5190.00	30.0~5100.0	4543.419	-42.34	-26.00	-29.01	Pass
ANT1	802.11n(HT40)	5190.00	5400.0~10000.0	5738.822	-44.92	-26.00	-29.01	Pass
ANT1	802.11n(HT40)	5190.00	10000.0~26000.0	10000.000	-51.06	-26.00	-29.01	Pass
ANT2	802.11n(HT40)	5190.00	5100.0~5141.6	5140.950	-44.16	-26.00	-29.01	Pass
ANT2	802.11n(HT40)	5190.00	5141.6~5150.0	5147.070	-38.90	-18.00	-21.01	Pass
ANT2	802.11n(HT40)	5190.00	5250.0~5251.0	5250.420	-47.51	-7.21	-10.22	Pass
ANT2	802.11n(HT40)	5190.00	5251.0~5270.0	5254.830	-46.82	-14.62	-17.63	Pass
ANT2	802.11n(HT40)	5190.00	5270.0~5278.4	5274.480	-49.06	-23.70	-26.71	Pass
ANT2	802.11n(HT40)	5190.00	5278.4~5400.0	5319.660	-48.36	-26.00	-29.01	Pass
ANT2	802.11n(HT40)	5190.00	30.0~5100.0	4542.422	-42.28	-26.00	-29.01	Pass
ANT2	802.11n(HT40)	5190.00	5400.0~10000.0	6057.862	-45.97	-26.00	-29.01	Pass
ANT2	802.11n(HT40)	5190.00	10000.0~26000.0	24486.400	-51.16	-26.00	-29.01	Pass



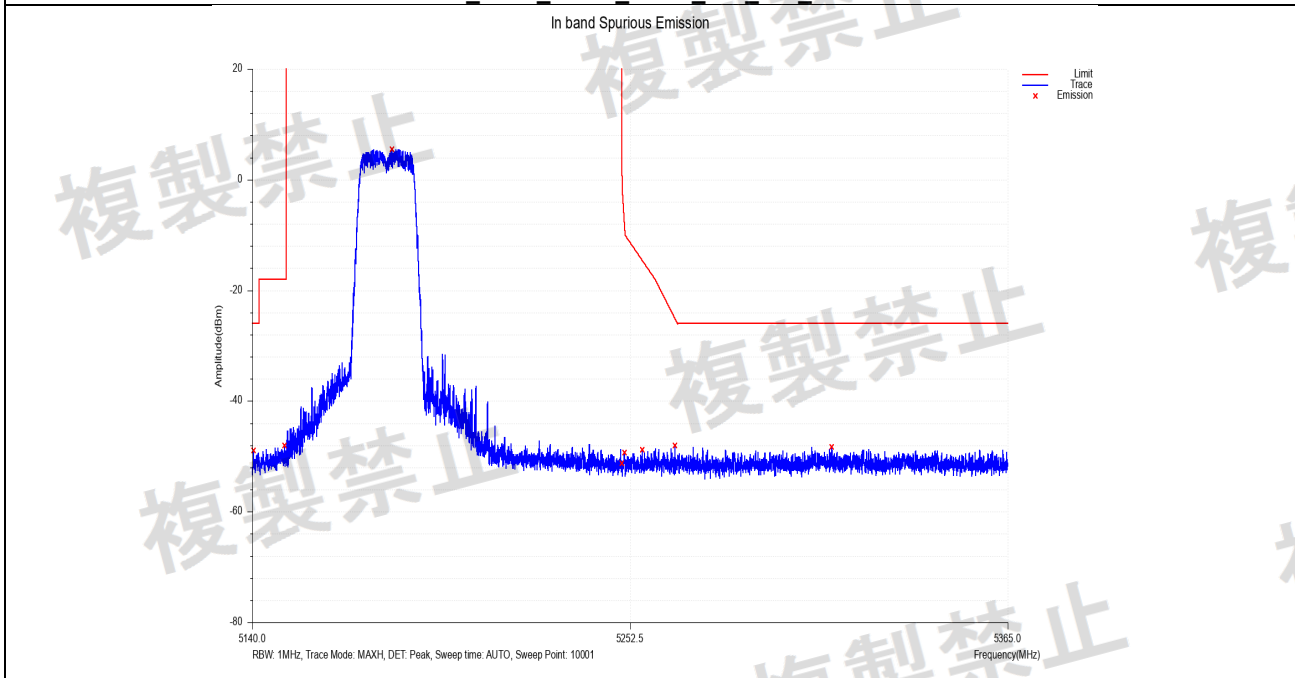
ANT1	802.11n(HT40)	5230.00	5100.0~5141.6	5140.260	-47.71	-26.00	-29.01	Pass
ANT1	802.11n(HT40)	5230.00	5141.6~5150.0	5148.420	-48.86	-18.00	-21.01	Pass
ANT1	802.11n(HT40)	5230.00	5250.0~5251.0	5250.180	-13.64	-4.81	-7.82	Pass
ANT1	802.11n(HT40)	5230.00	5251.0~5270.0	5251.530	-17.87	-13.23	-16.24	Pass
ANT1	802.11n(HT40)	5230.00	5270.0~5278.4	5272.500	-28.06	-22.51	-25.52	Pass
ANT1	802.11n(HT40)	5230.00	5278.4~5400.0	5278.680	-30.96	-26.00	-29.01	Pass
ANT1	802.11n(HT40)	5230.00	30.0~5100.0	2486.608	-46.21	-26.00	-29.01	Pass
ANT1	802.11n(HT40)	5230.00	5400.0~10000.0	6716.879	-47.14	-26.00	-29.01	Pass
ANT1	802.11n(HT40)	5230.00	10000.0~26000.0	23838.400	-50.86	-26.00	-29.01	Pass
ANT2	802.11n(HT40)	5230.00	5100.0~5141.6	5130.540	-47.19	-26.00	-29.01	Pass
ANT2	802.11n(HT40)	5230.00	5141.6~5150.0	5147.820	-43.60	-18.00	-21.01	Pass
ANT2	802.11n(HT40)	5230.00	5250.0~5251.0	5250.000	-16.12	-3.01	-6.02	Pass
ANT2	802.11n(HT40)	5230.00	5251.0~5270.0	5253.000	-20.00	-13.85	-16.86	Pass
ANT2	802.11n(HT40)	5230.00	5270.0~5278.4	5271.900	-28.24	-22.15	-25.16	Pass
ANT2	802.11n(HT40)	5230.00	5278.4~5400.0	5278.950	-33.38	-26.00	-29.01	Pass
ANT2	802.11n(HT40)	5230.00	30.0~5100.0	4542.422	-44.21	-26.00	-29.01	Pass
ANT2	802.11n(HT40)	5230.00	5400.0~10000.0	5859.459	-44.18	-26.00	-29.01	Pass
ANT2	802.11n(HT40)	5230.00	10000.0~26000.0	10000.000	-51.44	-26.00	-29.01	Pass
ANT1	802.11ac(VHT40)	5190.00	5100.0~5141.6	5135.610	-30.16	-26.00	-29.01	Pass
ANT1	802.11ac(VHT40)	5190.00	5141.6~5150.0	5147.880	-25.52	-18.00	-21.01	Pass
ANT1	802.11ac(VHT40)	5190.00	5250.0~5251.0	5250.270	-32.69	-5.71	-8.72	Pass
ANT1	802.11ac(VHT40)	5190.00	5251.0~5270.0	5252.820	-30.10	-13.78	-16.79	Pass
ANT1	802.11ac(VHT40)	5190.00	5270.0~5278.4	5276.310	-36.90	-24.80	-27.81	Pass
ANT1	802.11ac(VHT40)	5190.00	5278.4~5400.0	5280.930	-37.87	-26.00	-29.01	Pass
ANT1	802.11ac(VHT40)	5190.00	30.0~5100.0	5098.748	-43.94	-26.00	-29.01	Pass
ANT1	802.11ac(VHT40)	5190.00	5400.0~10000.0	5427.758	-45.07	-26.00	-29.01	Pass
ANT1	802.11ac(VHT40)	5190.00	10000.0~26000.0	24412.800	-50.93	-26.00	-29.01	Pass
ANT2	802.11ac(VHT40)	5190.00	5100.0~5141.6	5141.370	-32.66	-26.00	-29.01	Pass
ANT2	802.11ac(VHT40)	5190.00	5141.6~5150.0	5147.010	-27.13	-18.00	-21.01	Pass
ANT2	802.11ac(VHT40)	5190.00	5250.0~5251.0	5250.960	-35.40	-12.61	-15.62	Pass
ANT2	802.11ac(VHT40)	5190.00	5251.0~5270.0	5253.540	-34.45	-14.08	-17.09	Pass
ANT2	802.11ac(VHT40)	5190.00	5270.0~5278.4	5275.980	-38.95	-24.60	-27.61	Pass
ANT2	802.11ac(VHT40)	5190.00	5278.4~5400.0	5278.410	-41.82	-26.00	-29.01	Pass
ANT2	802.11ac(VHT40)	5190.00	30.0~5100.0	2630.176	-45.42	-26.00	-29.01	Pass
ANT2	802.11ac(VHT40)	5190.00	5400.0~10000.0	6266.235	-45.18	-26.00	-29.01	Pass
ANT2	802.11ac(VHT40)	5190.00	10000.0~26000.0	24305.600	-50.08	-26.00	-29.01	Pass
ANT1	802.11ac(VHT40)	5230.00	5100.0~5141.6	5106.360	-49.51	-26.00	-29.01	Pass
ANT1	802.11ac(VHT40)	5230.00	5141.6~5150.0	5144.430	-49.55	-18.00	-21.01	Pass
ANT1	802.11ac(VHT40)	5230.00	5250.0~5251.0	5250.150	-21.81	-4.51	-7.52	Pass
ANT1	802.11ac(VHT40)	5230.00	5251.0~5270.0	5251.200	-26.18	-13.09	-16.10	Pass
ANT1	802.11ac(VHT40)	5230.00	5270.0~5278.4	5276.940	-43.13	-25.17	-28.18	Pass
ANT1	802.11ac(VHT40)	5230.00	5278.4~5400.0	5295.690	-47.36	-26.00	-29.01	Pass
ANT1	802.11ac(VHT40)	5230.00	30.0~5100.0	4542.422	-44.51	-26.00	-29.01	Pass
ANT1	802.11ac(VHT40)	5230.00	5400.0~10000.0	5595.254	-47.31	-26.00	-29.01	Pass
ANT1	802.11ac(VHT40)	5230.00	10000.0~26000.0	24393.600	-50.27	-26.00	-29.01	Pass
ANT2	802.11ac(VHT40)	5230.00	5100.0~5141.6	5135.880	-48.19	-26.00	-29.01	Pass
ANT2	802.11ac(VHT40)	5230.00	5141.6~5150.0	5149.470	-48.65	-18.00	-21.01	Pass
ANT2	802.11ac(VHT40)	5230.00	5250.0~5251.0	5250.120	-19.65	-4.21	-7.22	Pass
ANT2	802.11ac(VHT40)	5230.00	5251.0~5270.0	5251.020	-27.19	-13.02	-16.03	Pass
ANT2	802.11ac(VHT40)	5230.00	5270.0~5278.4	5275.050	-43.79	-24.04	-27.05	Pass
ANT2	802.11ac(VHT40)	5230.00	5278.4~5400.0	5286.510	-47.12	-26.00	-29.01	Pass
ANT2	802.11ac(VHT40)	5230.00	30.0~5100.0	4528.464	-42.42	-26.00	-29.01	Pass
ANT2	802.11ac(VHT40)	5230.00	5400.0~10000.0	7077.793	-44.99	-26.00	-29.01	Pass
ANT2	802.11ac(VHT40)	5230.00	10000.0~26000.0	10000.000	-49.85	-26.00	-29.01	Pass
ANT1	802.11ac(VHT80)	5210.00	5100.0~5123.2	5121.318	-40.63	-26.00	-29.01	Pass
ANT1	802.11ac(VHT80)	5210.00	5123.2~5150.0	5145.866	-31.71	-18.00	-21.01	Pass
ANT1	802.11ac(VHT80)	5210.00	5250.0~5251.0	5250.556	-20.22	-11.58	-14.59	Pass
ANT1	802.11ac(VHT80)	5210.00	5251.0~5290.0	5251.734	-20.49	-16.17	-19.18	Pass
ANT1	802.11ac(VHT80)	5210.00	5290.0~5296.7	5295.928	-30.57	-25.80	-28.81	Pass
ANT1	802.11ac(VHT80)	5210.00	5296.7~5480.0	5297.980	-32.56	-26.00	-29.01	Pass
ANT1	802.11ac(VHT80)	5210.00	30.0~5100.0	5097.751	-45.89	-26.00	-29.01	Pass
ANT1	802.11ac(VHT80)	5210.00	5480.0~10000.0	6830.537	-47.30	-26.00	-29.01	Pass
ANT1	802.11ac(VHT80)	5210.00	10000.0~26000.0	24286.400	-51.35	-26.00	-29.01	Pass
ANT2	802.11ac(VHT80)	5210.00	5100.0~5123.2	5115.504	-43.95	-26.00	-29.01	Pass
ANT2	802.11ac(VHT80)	5210.00	5123.2~5150.0	5144.536	-38.21	-18.00	-21.01	Pass
ANT2	802.11ac(VHT80)	5210.00	5250.0~5251.0	5250.062	-20.97	-6.64	-9.65	Pass
ANT2	802.11ac(VHT80)	5210.00	5251.0~5290.0	5251.354	-26.02	-16.09	-19.10	Pass
ANT2	802.11ac(VHT80)	5210.00	5290.0~5296.7	5295.662	-38.18	-25.72	-28.73	Pass
ANT2	802.11ac(VHT80)	5210.00	5296.7~5480.0	5305.352	-39.25	-26.00	-29.01	Pass
ANT2	802.11ac(VHT80)	5210.00	30.0~5100.0	192.511	-46.51	-26.00	-29.01	Pass
ANT2	802.11ac(VHT80)	5210.00	5480.0~10000.0	6019.976	-46.34	-26.00	-29.01	Pass

ANT2	802.11ac(VHT80)	5210.00	10000.0~26000.0	24441.600	-51.34	-26.00	-29.01	Pass
------	-----------------	---------	-----------------	-----------	--------	--------	--------	------

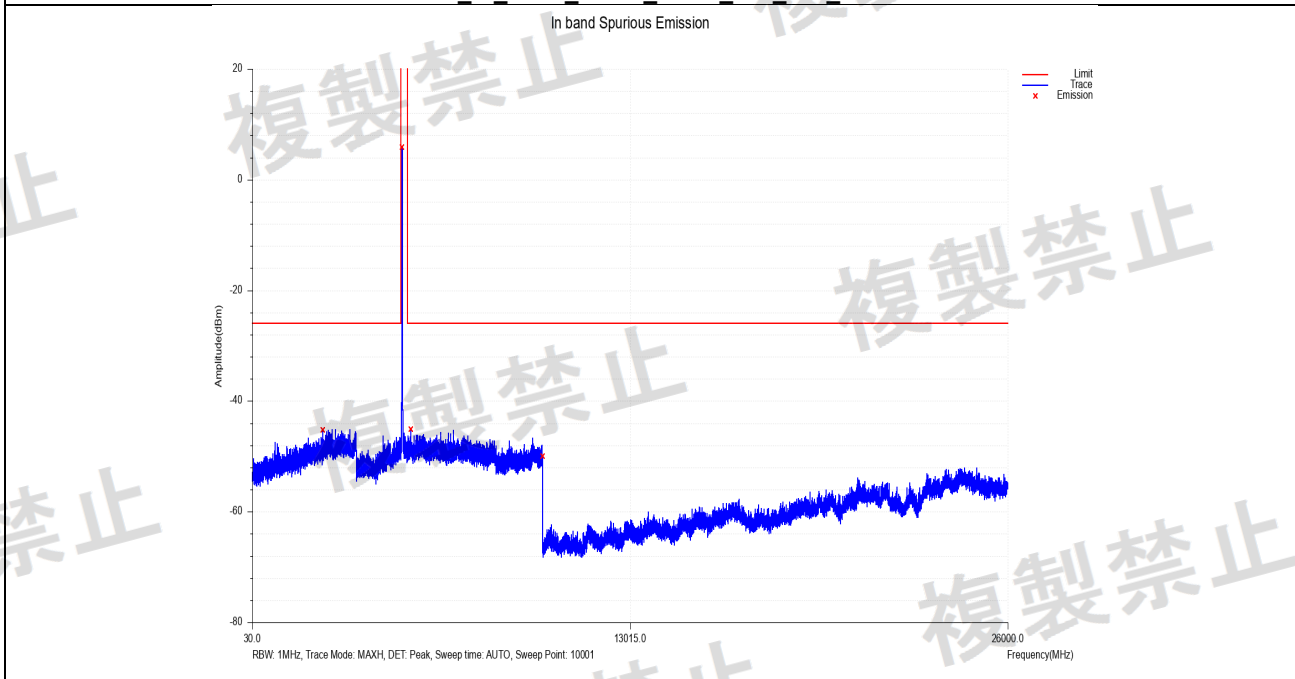


Test Graphs

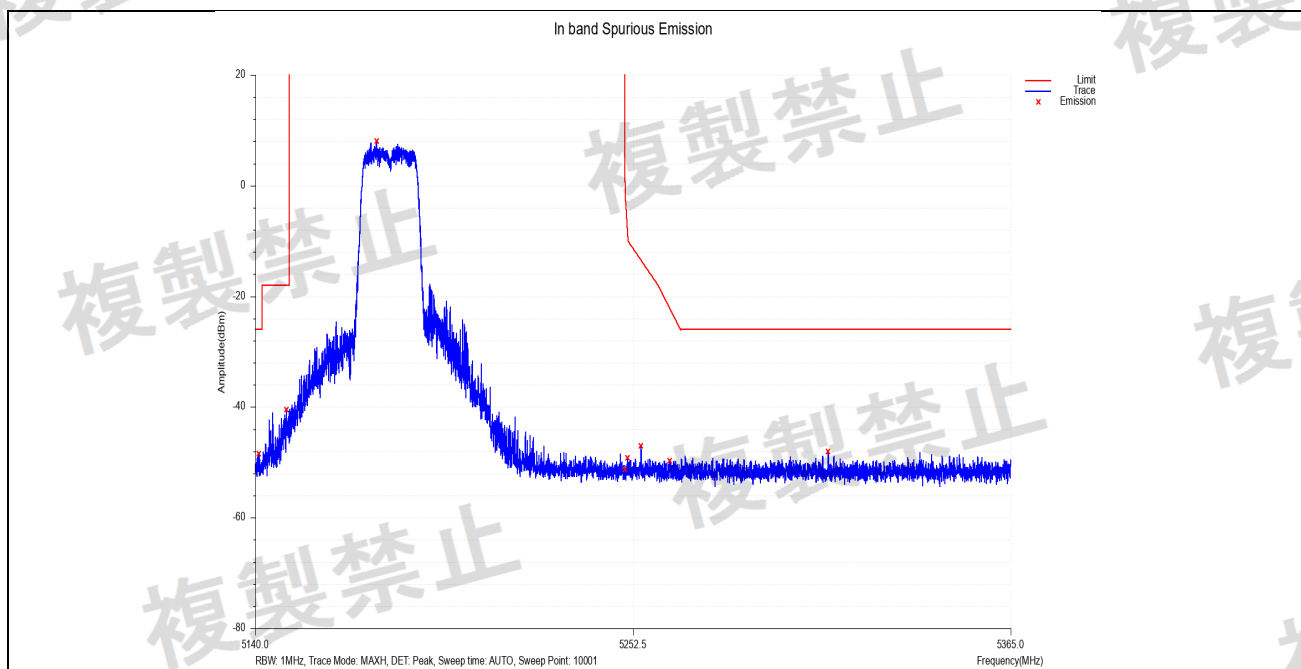
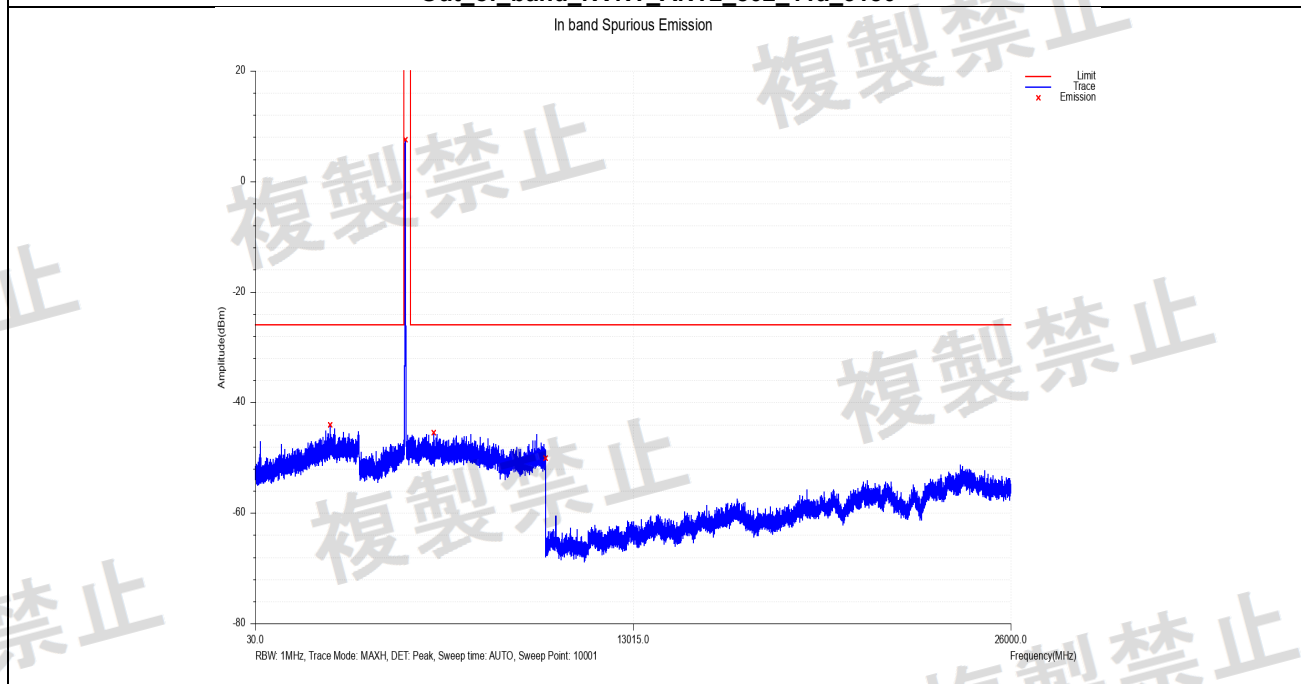
In_band_NVNT_ANT1_802_11a_5180



Out_of_band_NVNT_ANT1_802_11a_5180

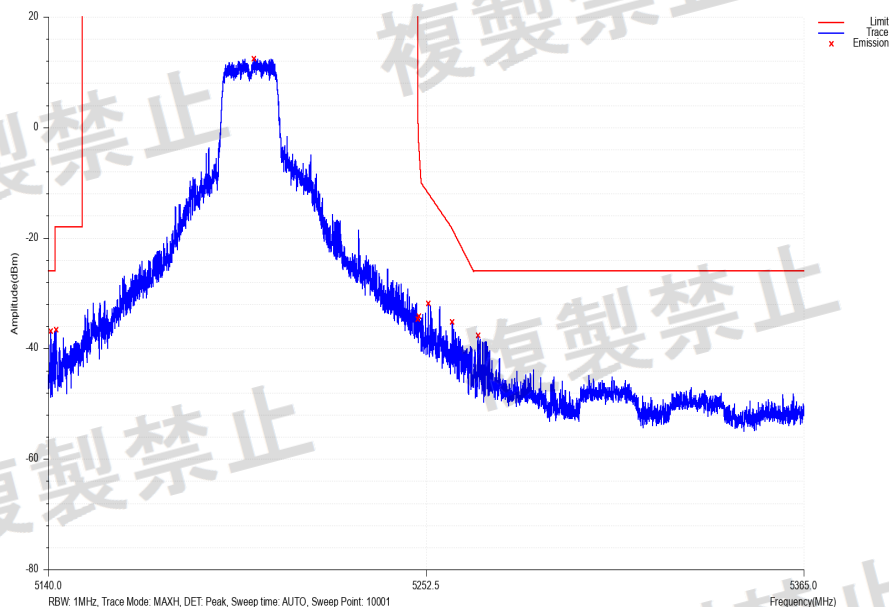


In_band_NVNT_ANT2_802_11a_5180

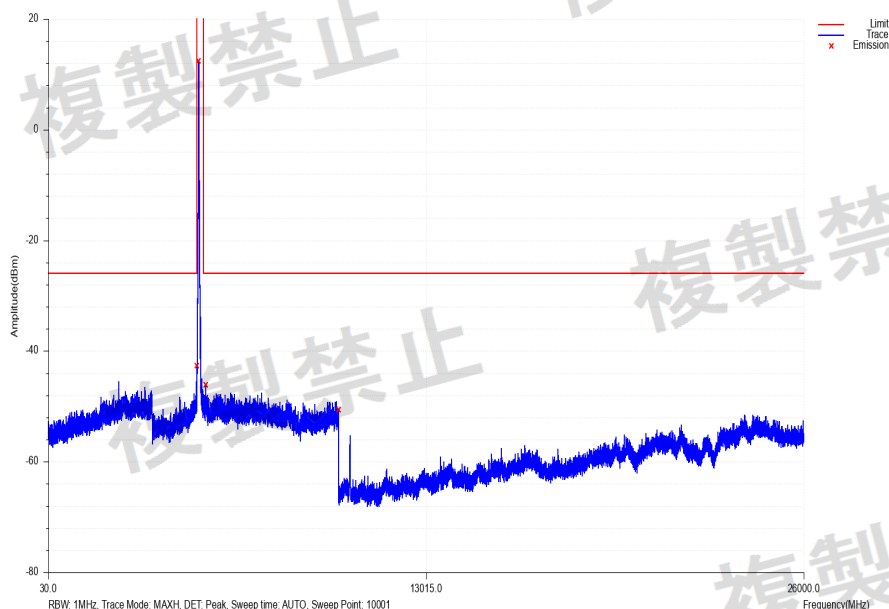
**Out of band NVNT ANT2_802_11a_5180**

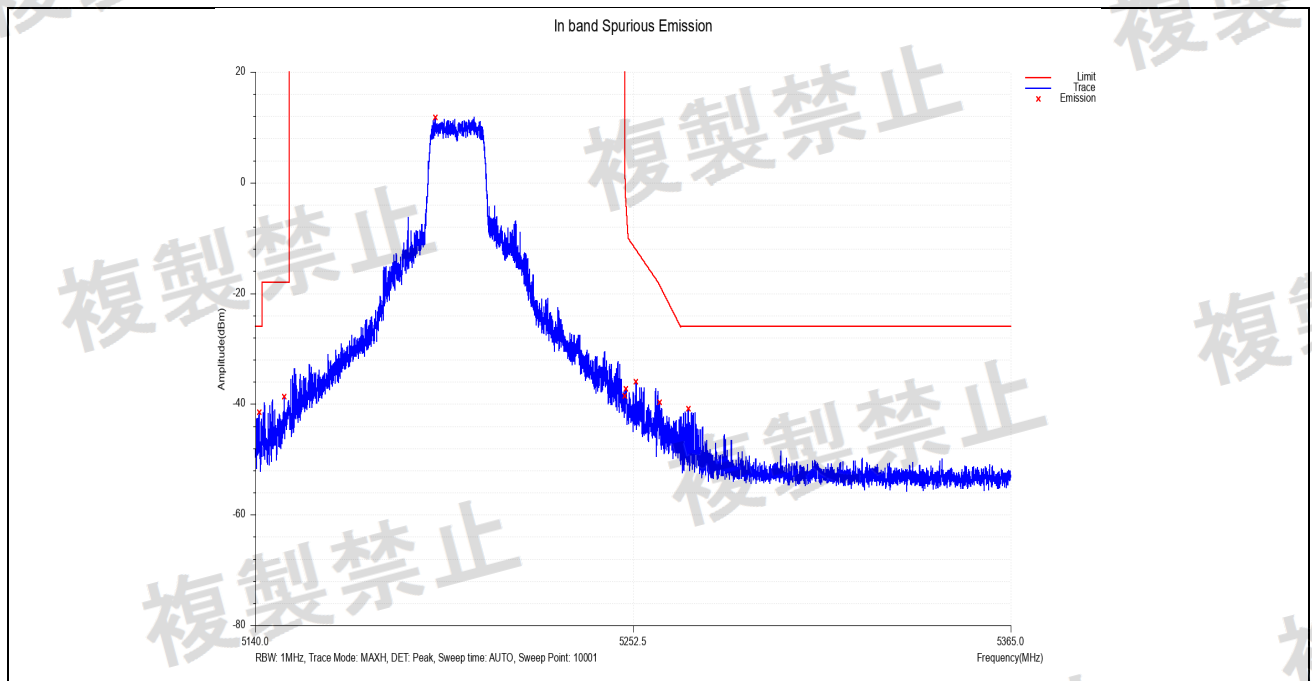
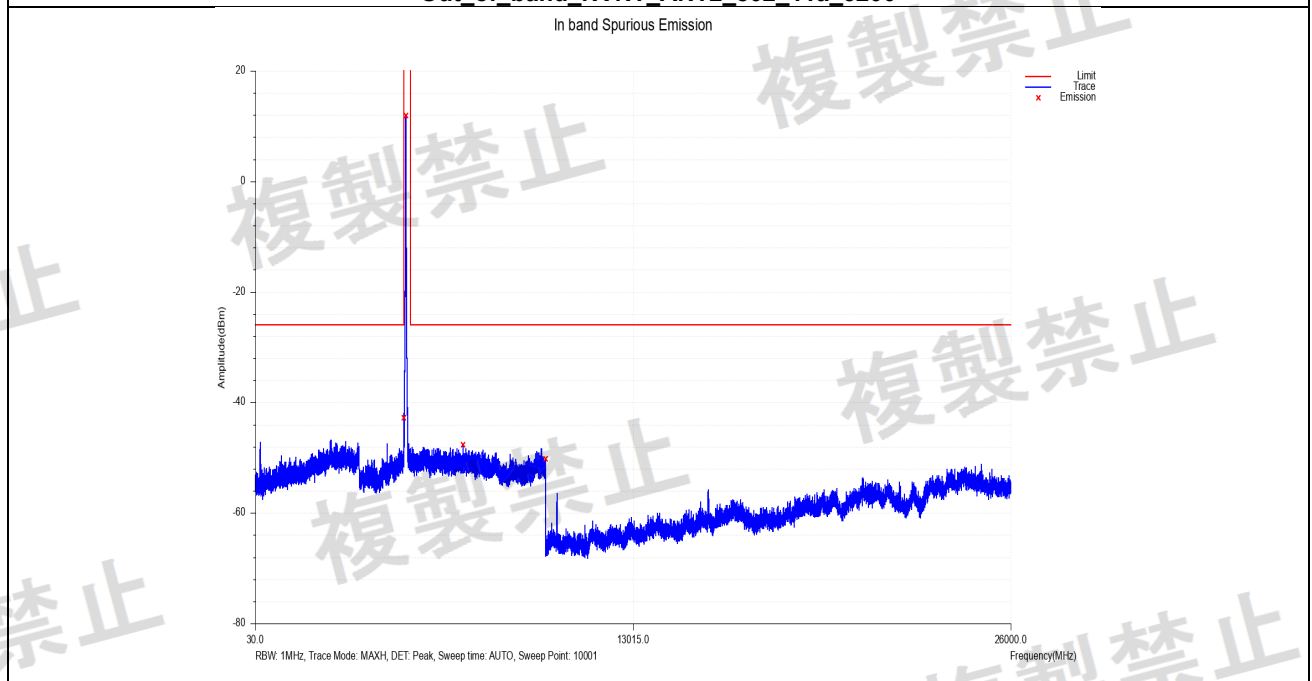
**In_band_NVNT_ANT1_802_11a_5200**

In band Spurious Emission

**Out_of_band_NVNT_ANT1_802_11a_5200**

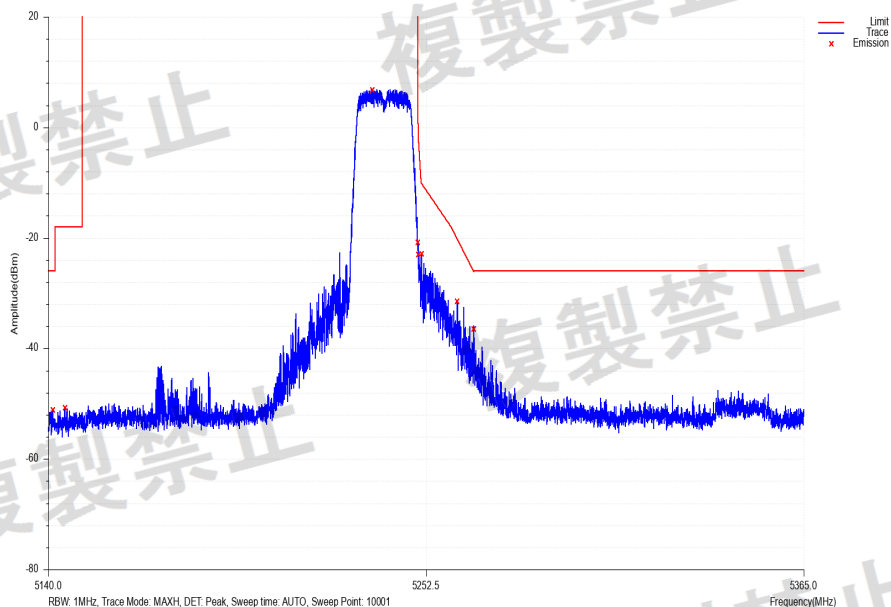
In band Spurious Emission

**In_band_NVNT_ANT2_802_11a_5200**

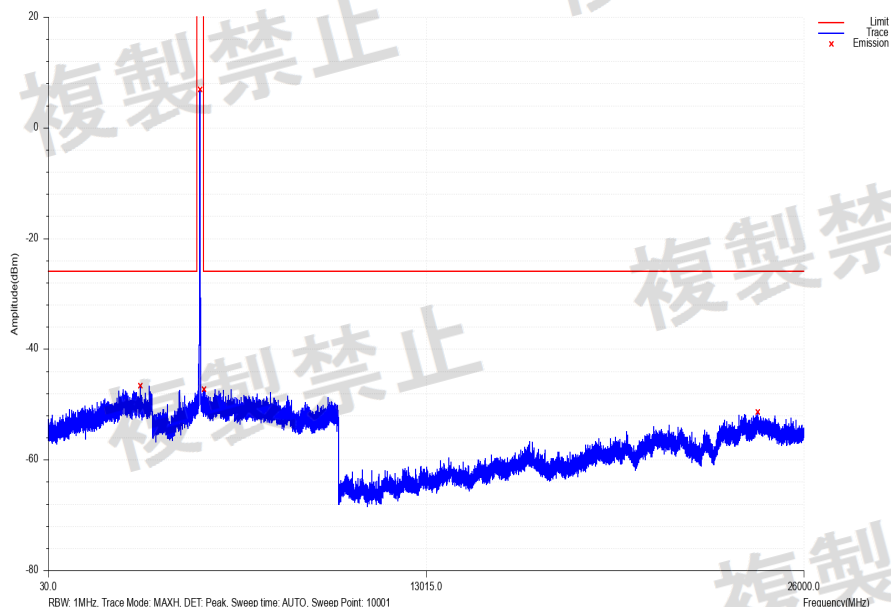
**Out of band NVNT_ANT2_802_11a_5200**

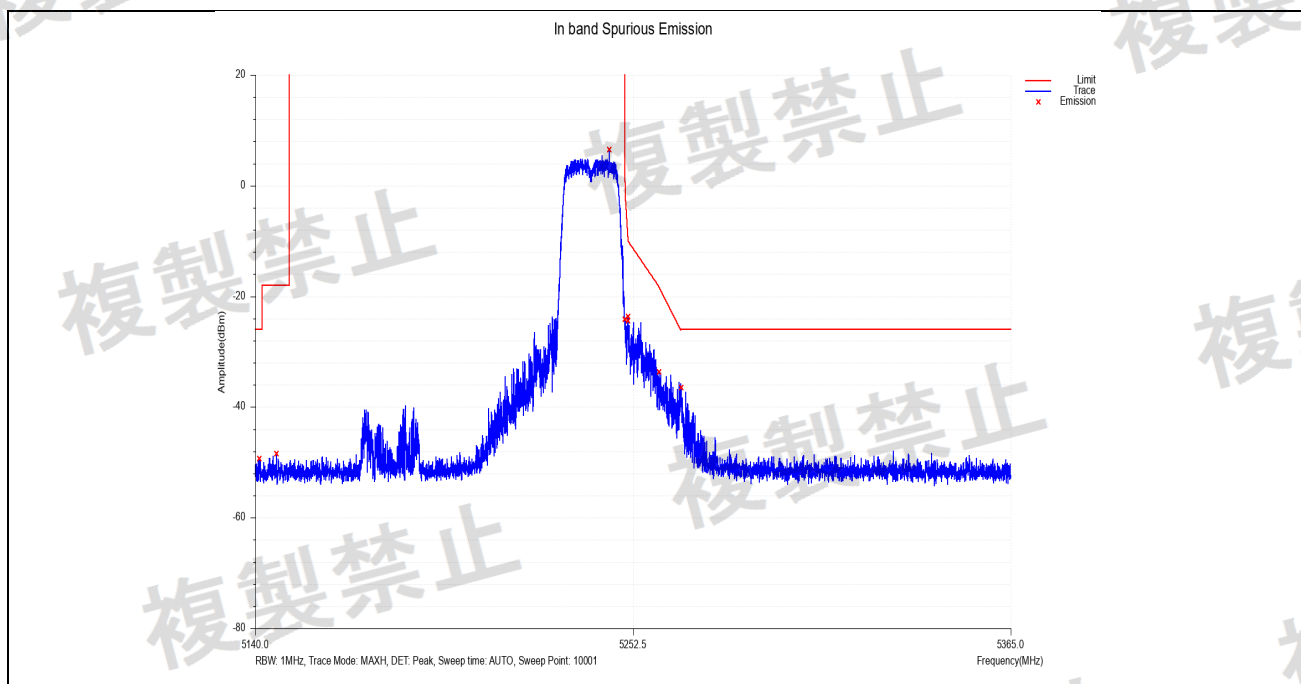
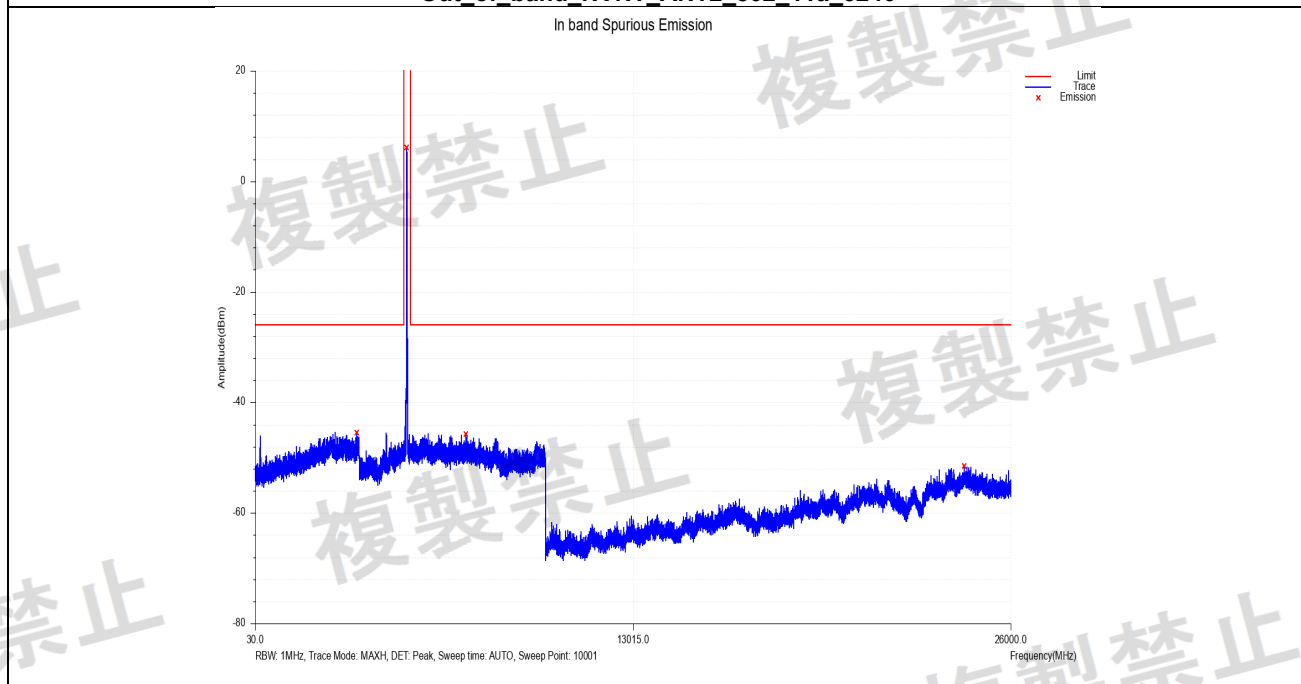
In_band_NVNT_ANT1_802_11a_5240

In band Spurious Emission

**Out_of_band_NVNT_ANT1_802_11a_5240**

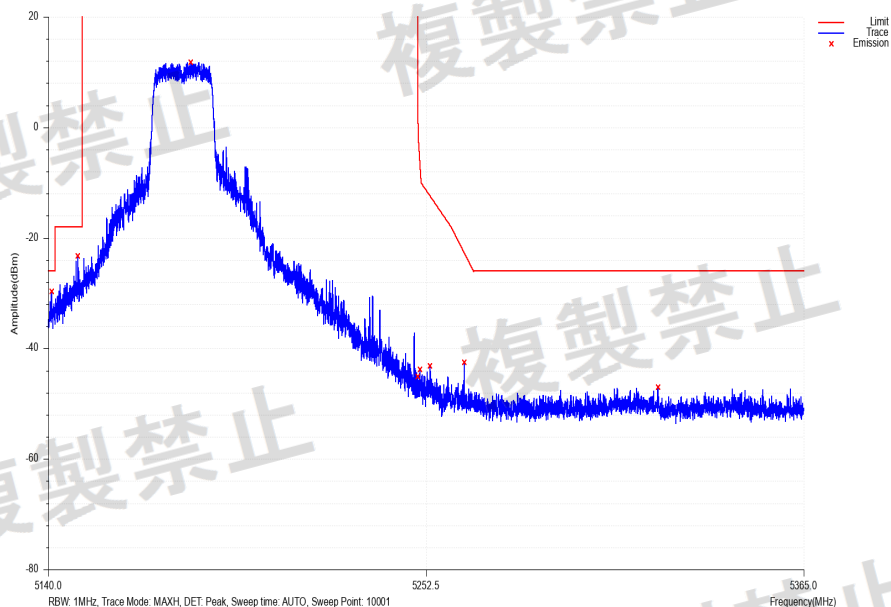
In band Spurious Emission

**In_band_NVNT_ANT2_802_11a_5240**

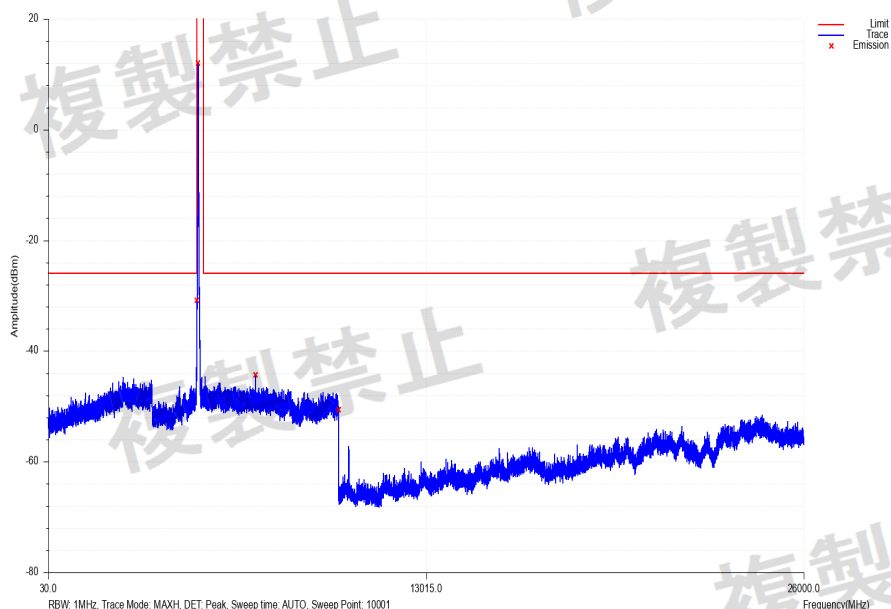
**Out of band NVNT_ANT2_802_11a_5240**

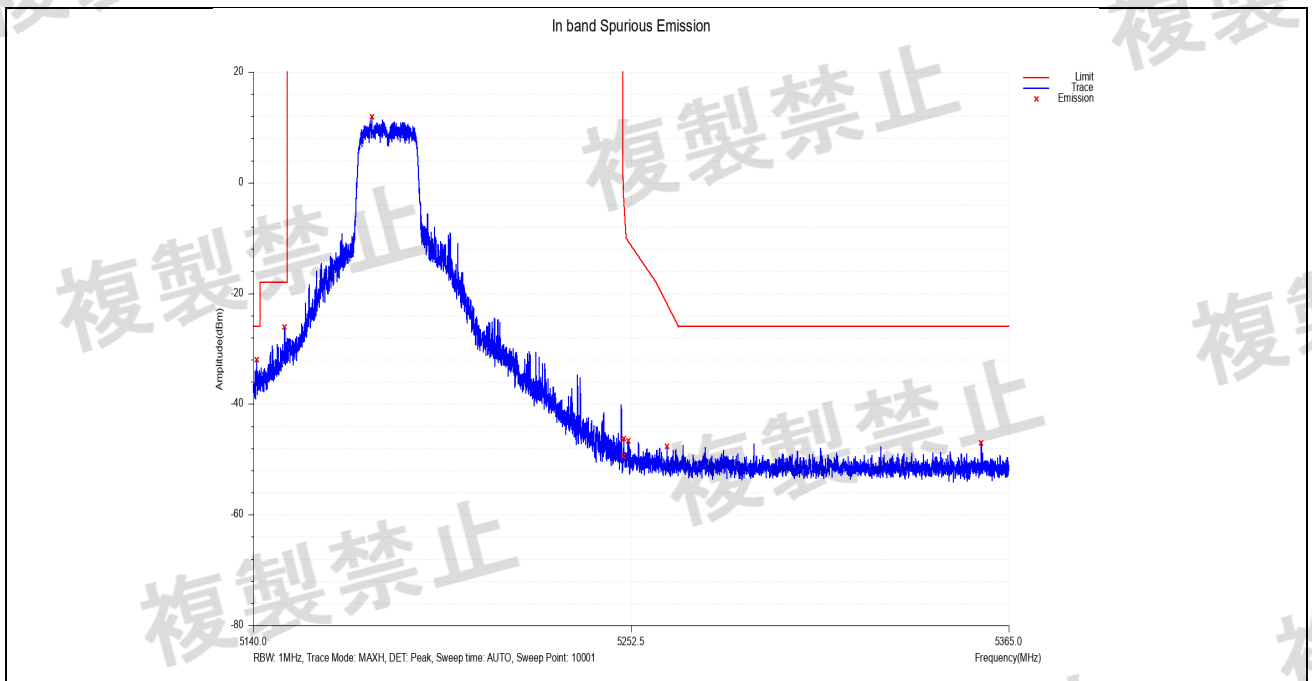
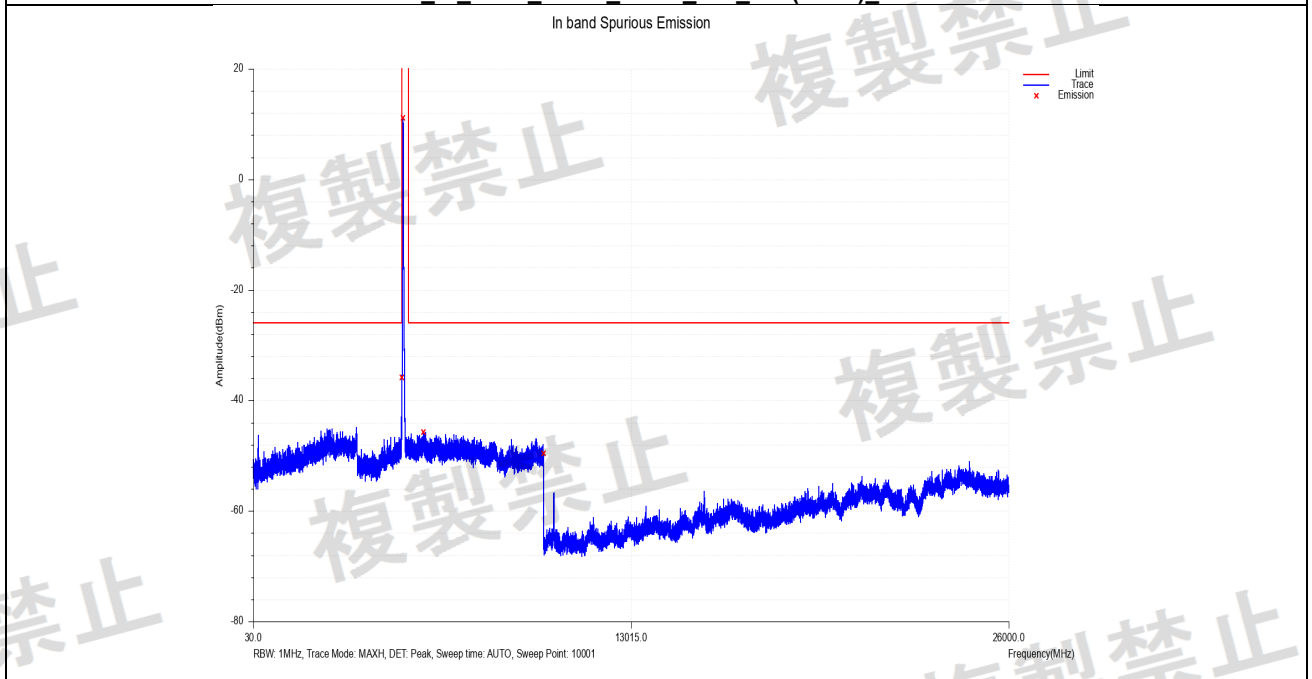
**In band NVNT_ANT1_802_11n(HT20)_5180**

In band Spurious Emission

**Out of band NVNT_ANT1_802_11n(HT20)_5180**

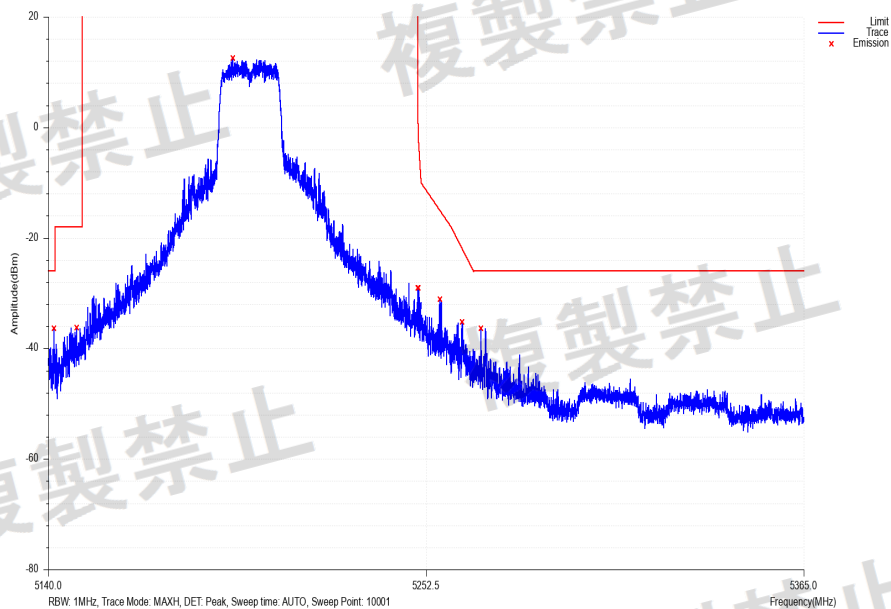
In band Spurious Emission

**In band NVNT_ANT2_802_11n(HT20)_5180**

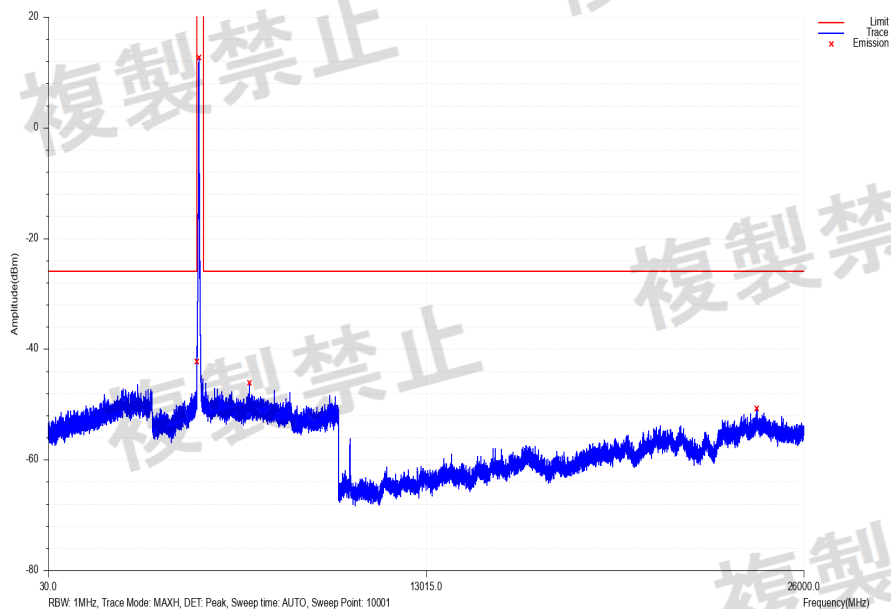
**Out of band NVNT_ANT2_802_11n(HT20)_5180**

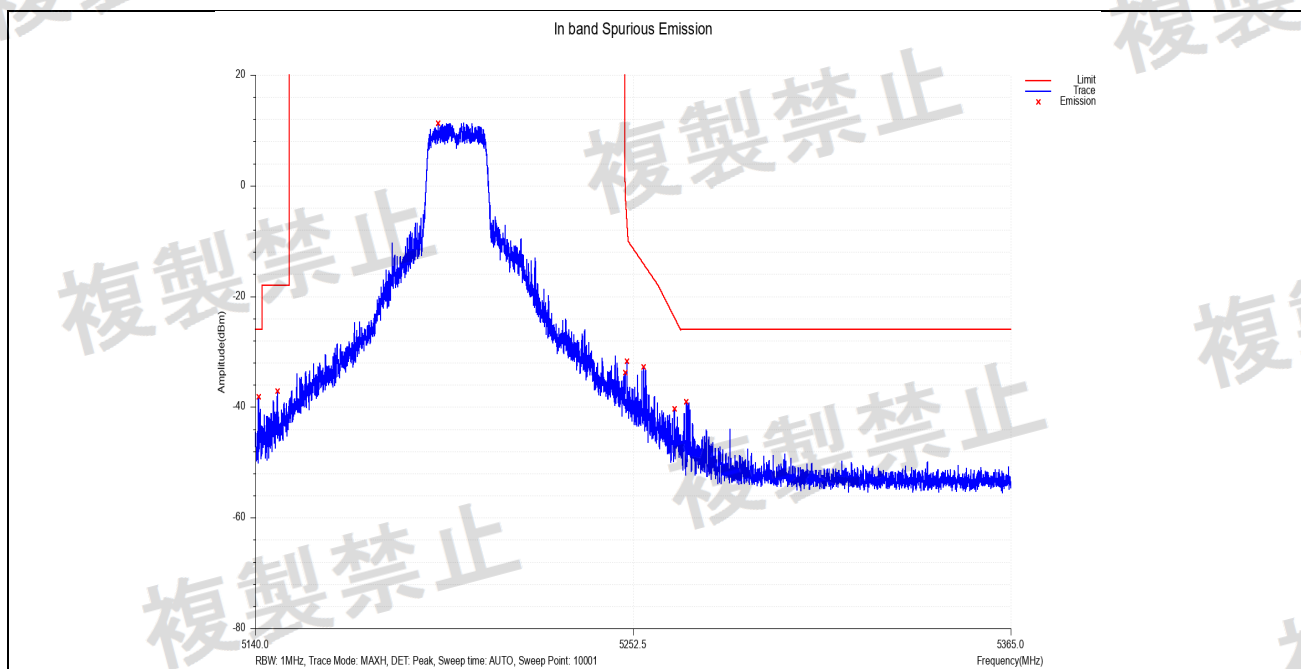
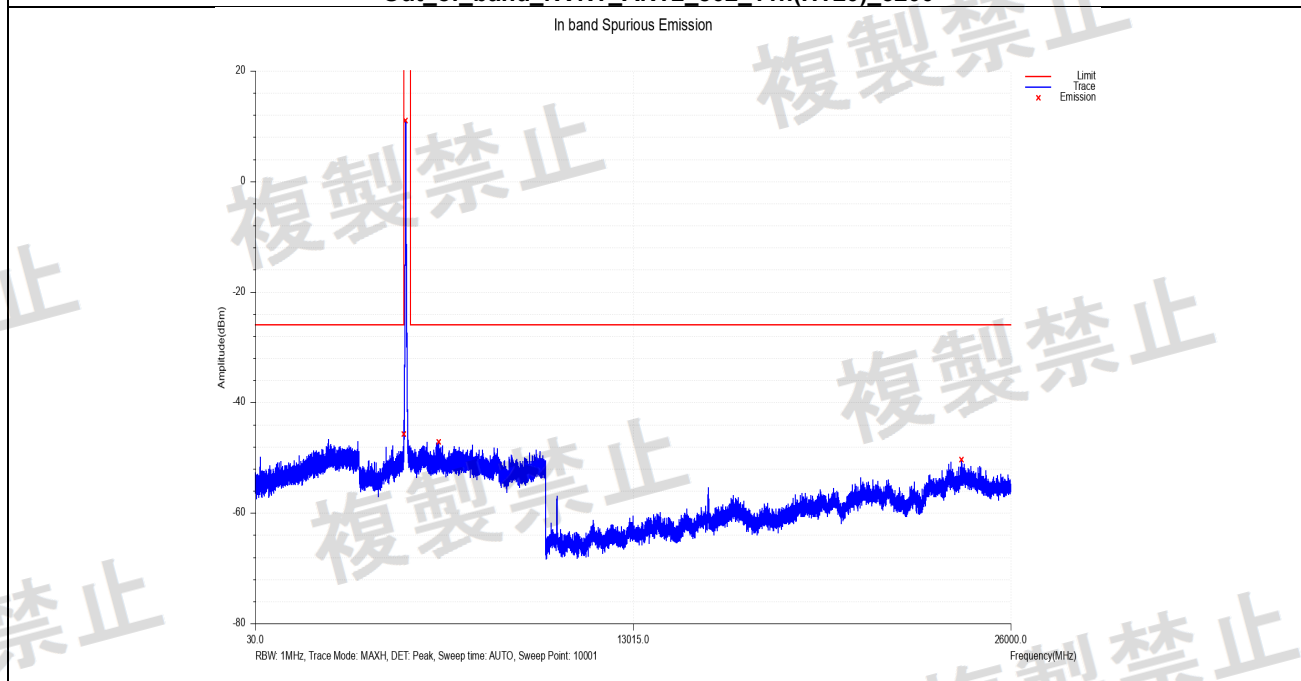
**In_band_NVNT_ANT1_802_11n(HT20)_5200**

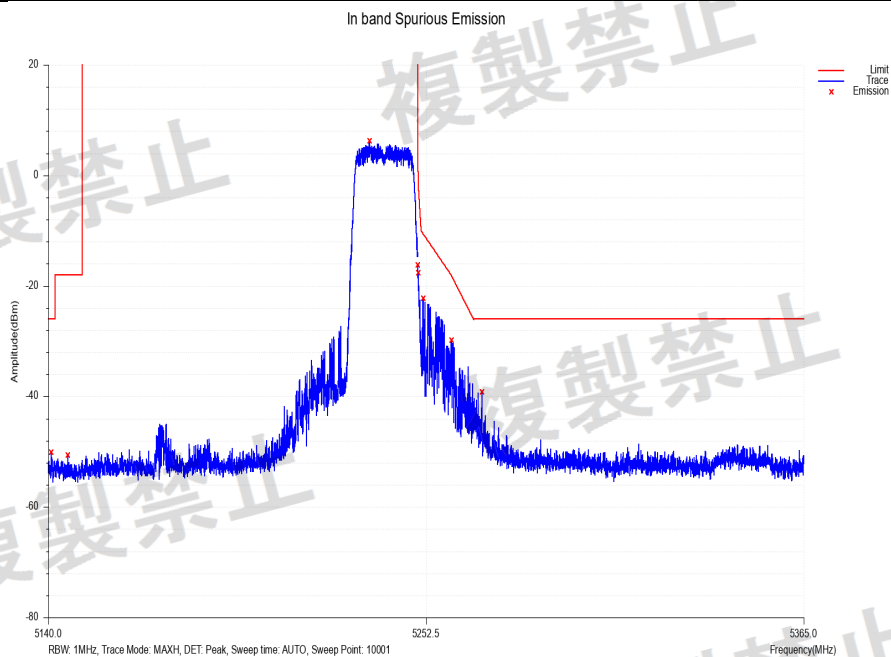
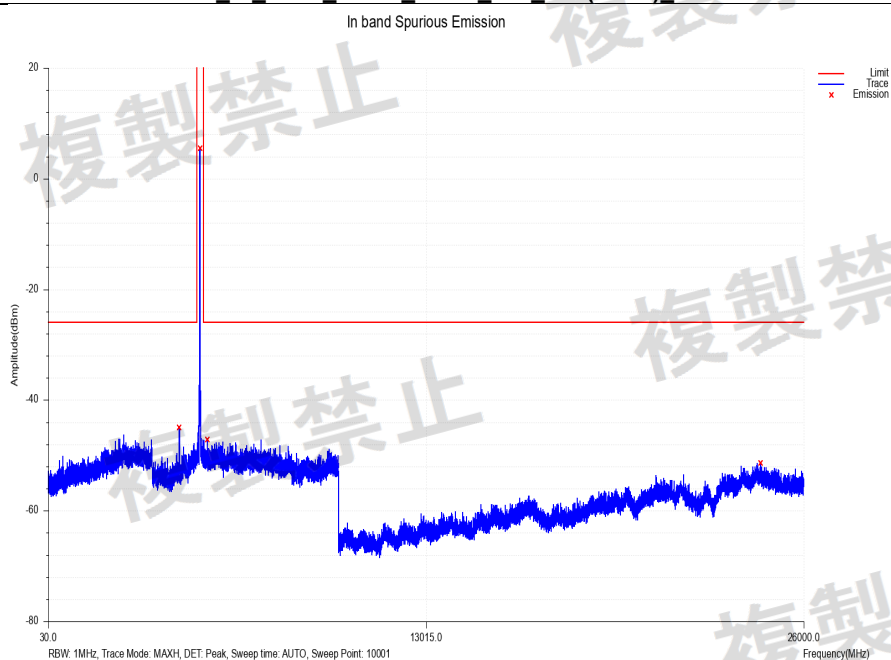
In band Spurious Emission

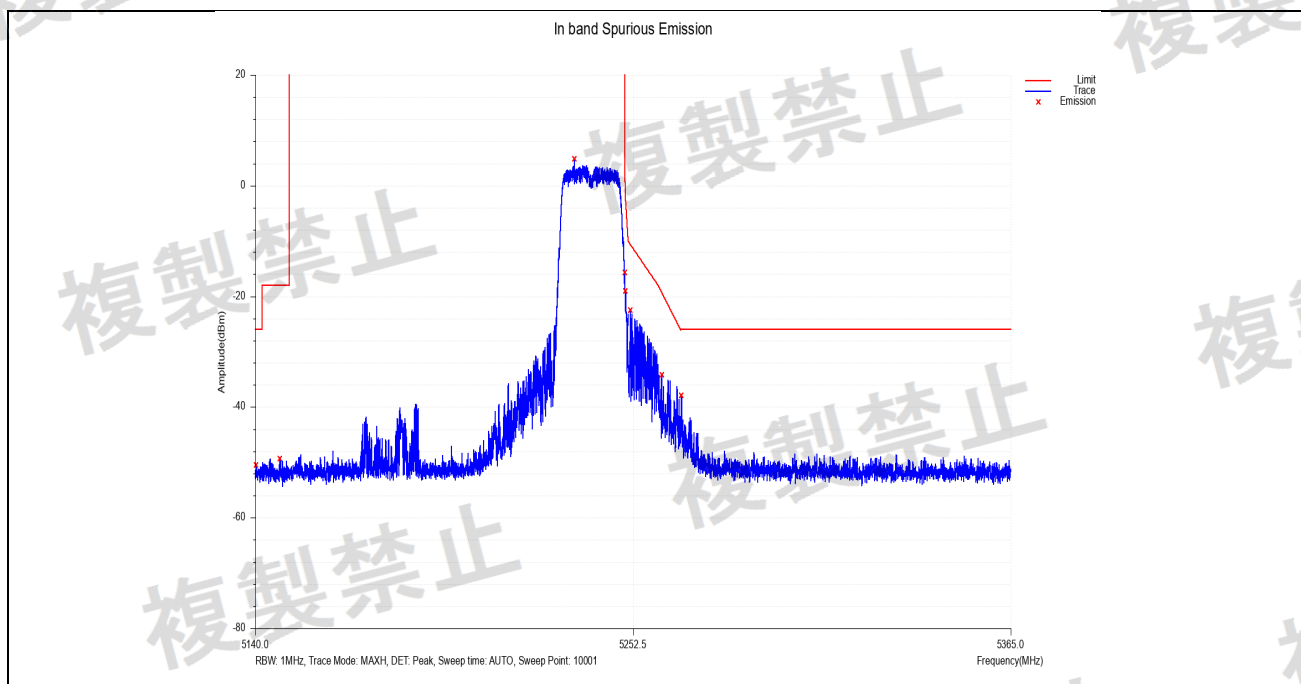
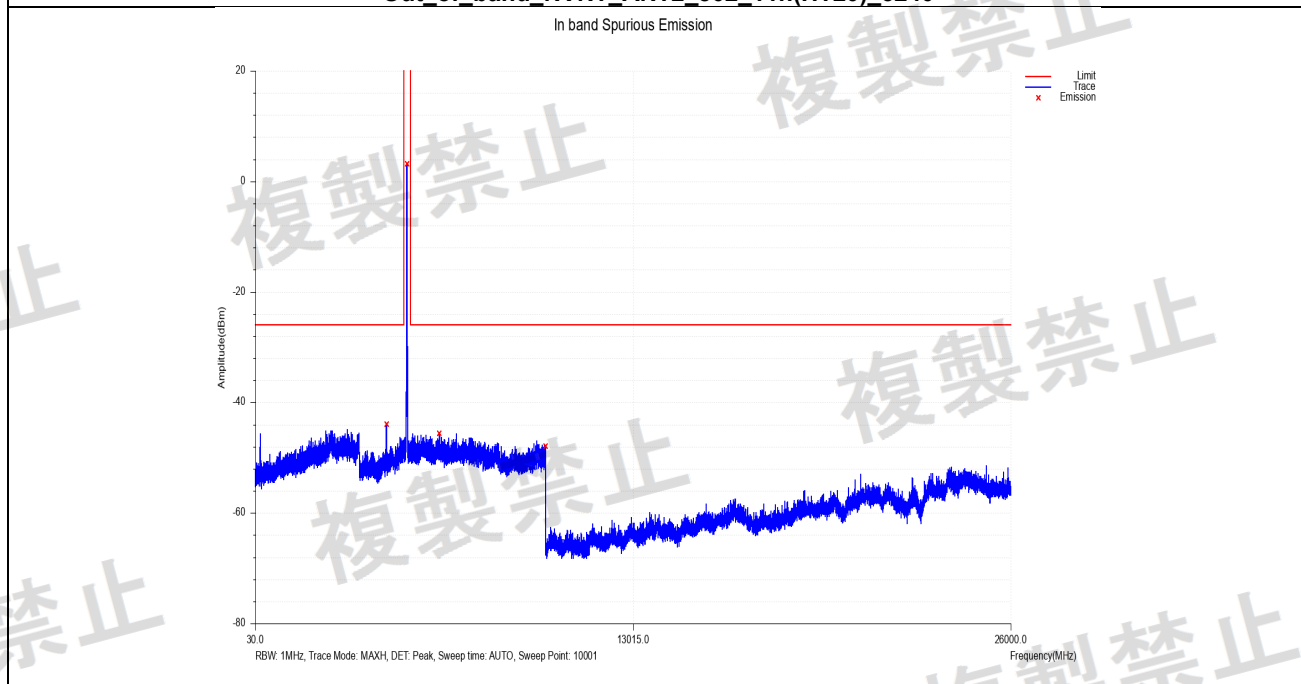
**Out_of_band_NVNT_ANT1_802_11n(HT20)_5200**

In band Spurious Emission

**In_band_NVNT_ANT2_802_11n(HT20)_5200**

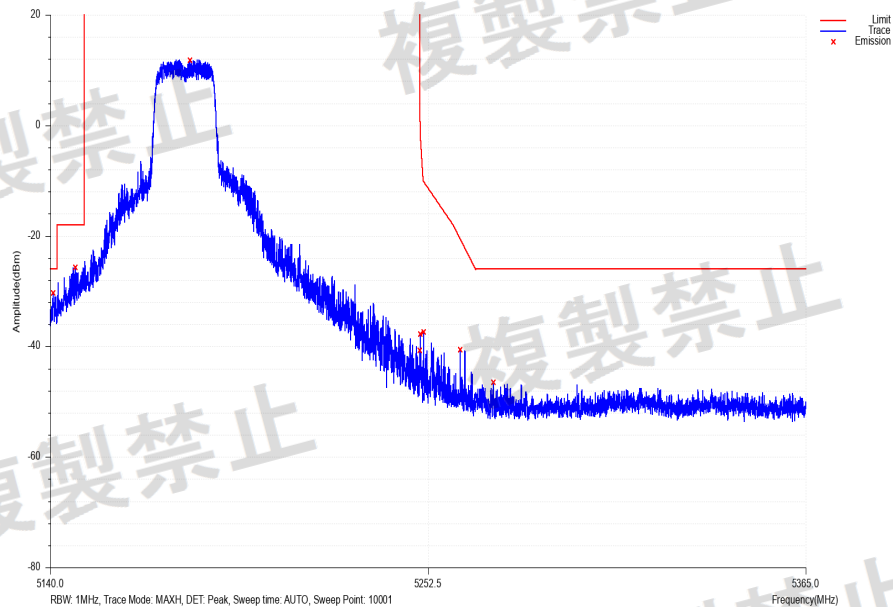
**Out of band NVNT_ANT2_802_11n(HT20)_5200**

**In_band_NVNT_ANT1_802_11n(HT20)_5240****Out_of_band_NVNT_ANT1_802_11n(HT20)_5240****In_band_NVNT_ANT2_802_11n(HT20)_5240**

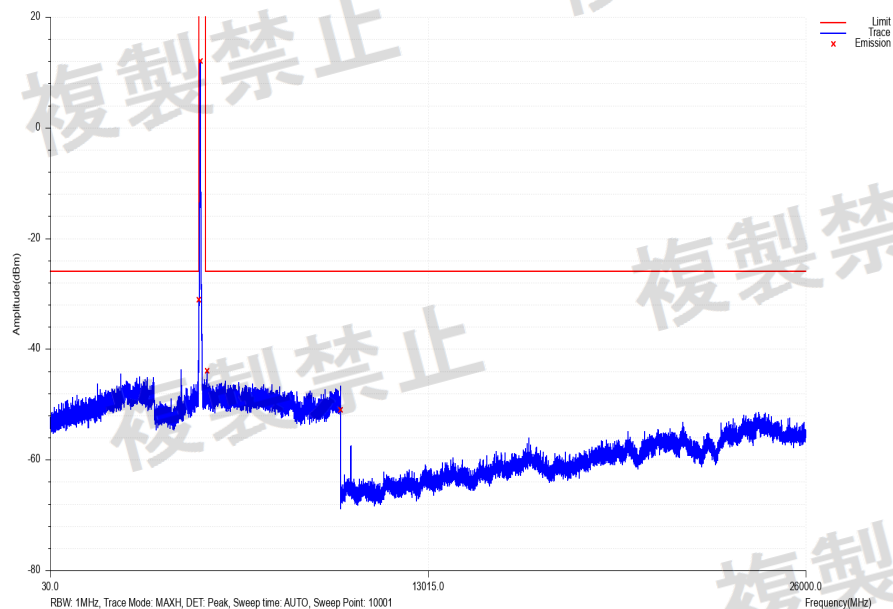
**Out of band NVNT_ANT2_802_11n(HT20)_5240**

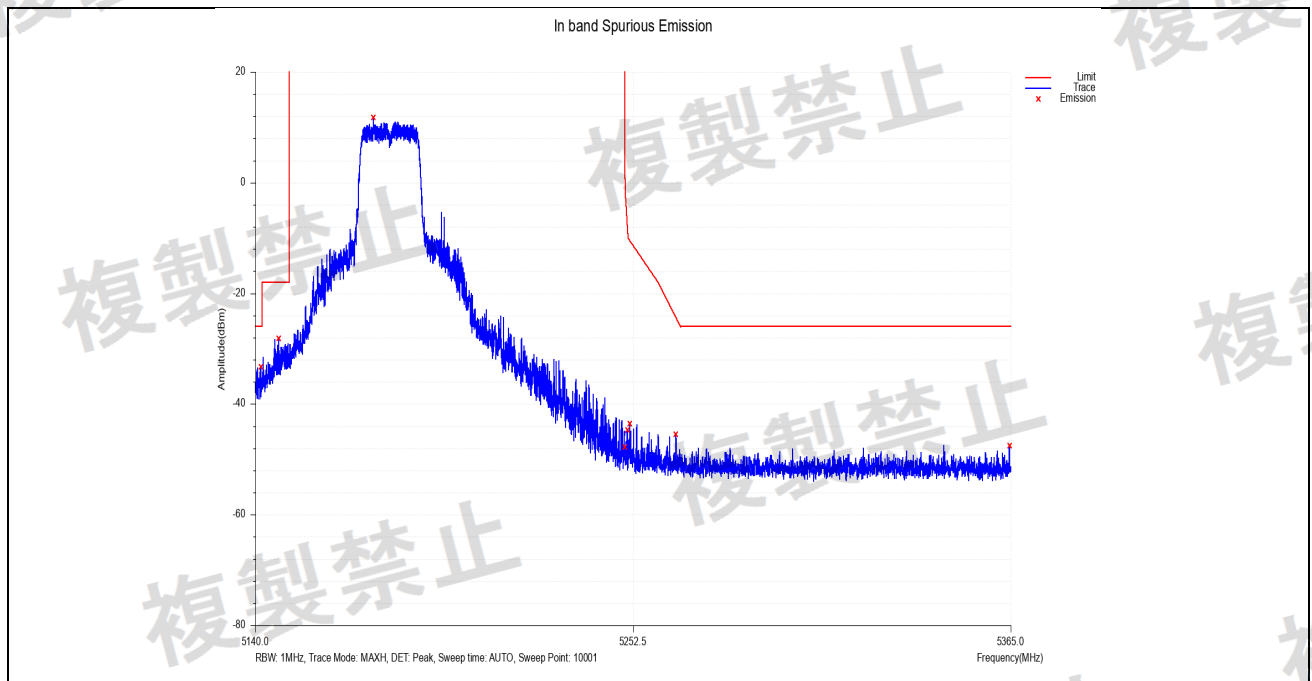
**In_band_NVNT_ANT1_802_11ac(VHT20)_5180**

In band Spurious Emission

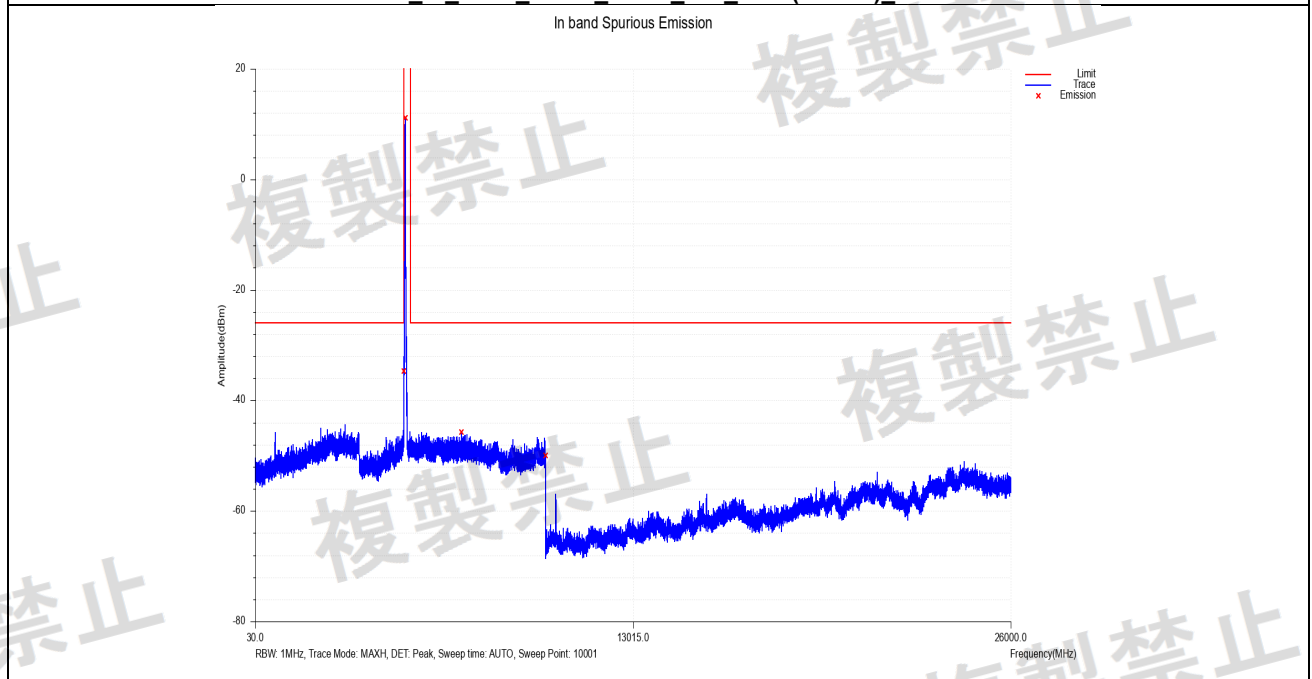
**Out_of_band_NVNT_ANT1_802_11ac(VHT20)_5180**

In band Spurious Emission

**In_band_NVNT_ANT2_802_11ac(VHT20)_5180**

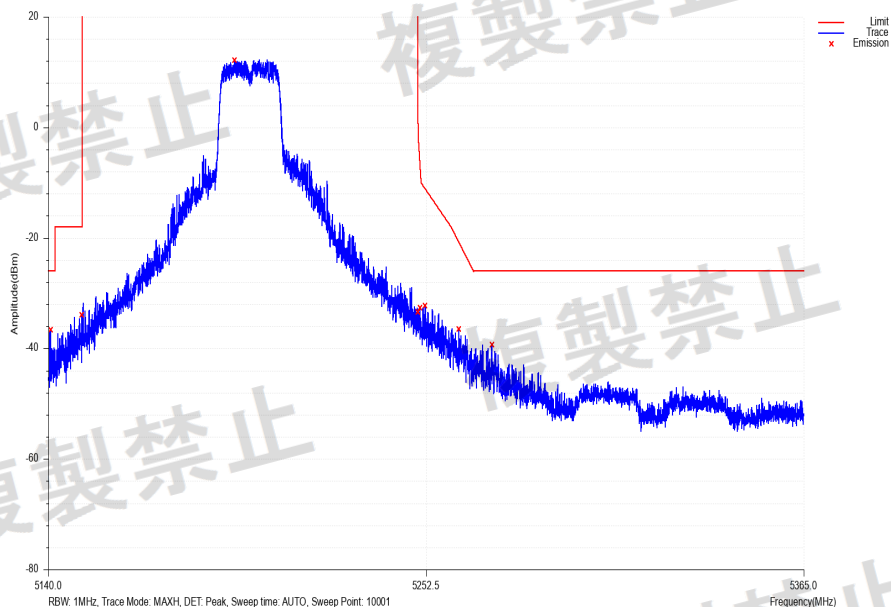


Out_of_band_NVNT_ANT2_802_11ac(VHT20)_5180

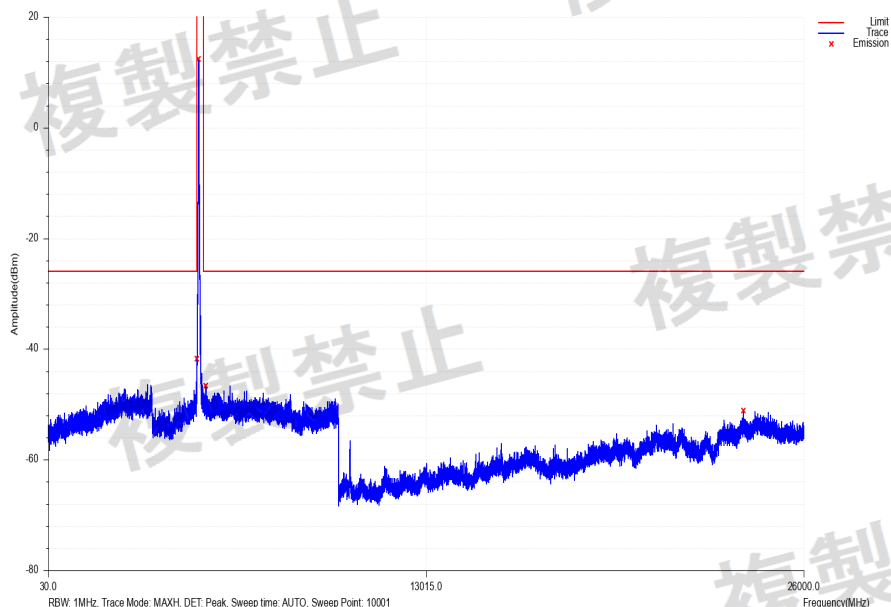


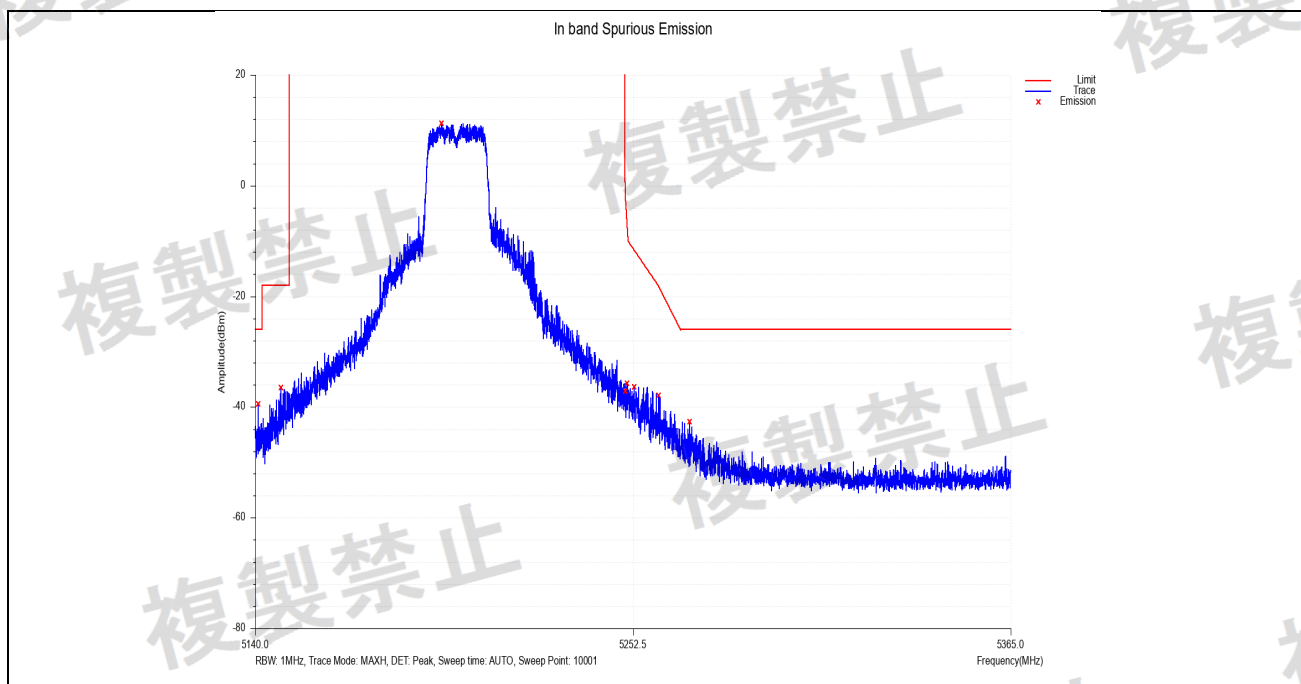
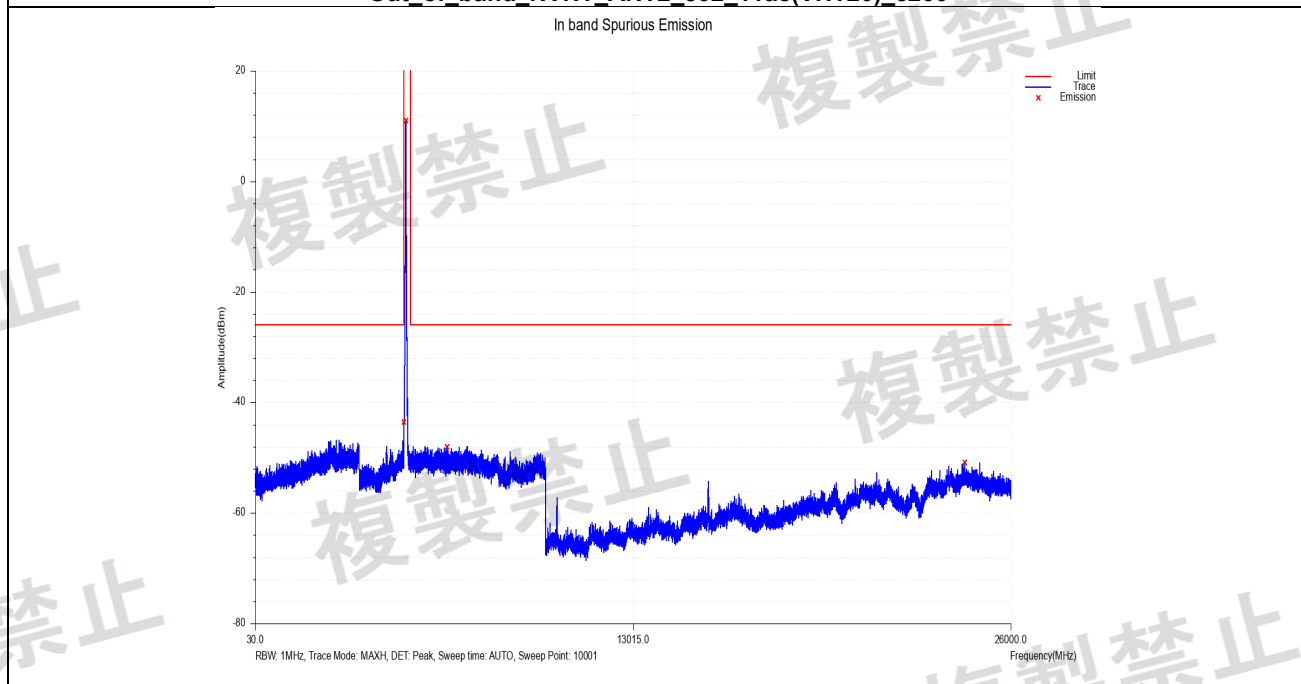
In_band_NVNT_ANT1_802_11ac(VHT20)_5200

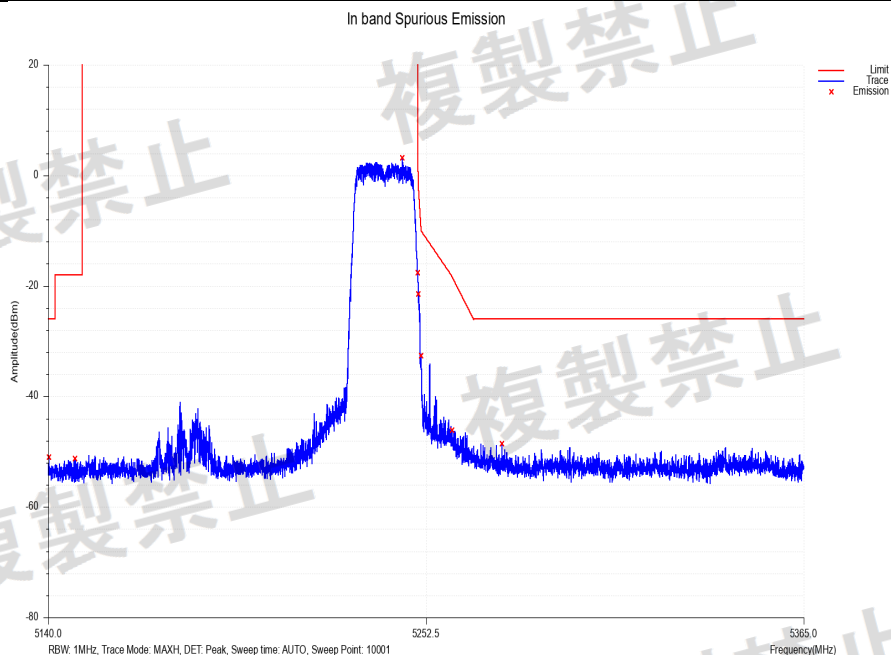
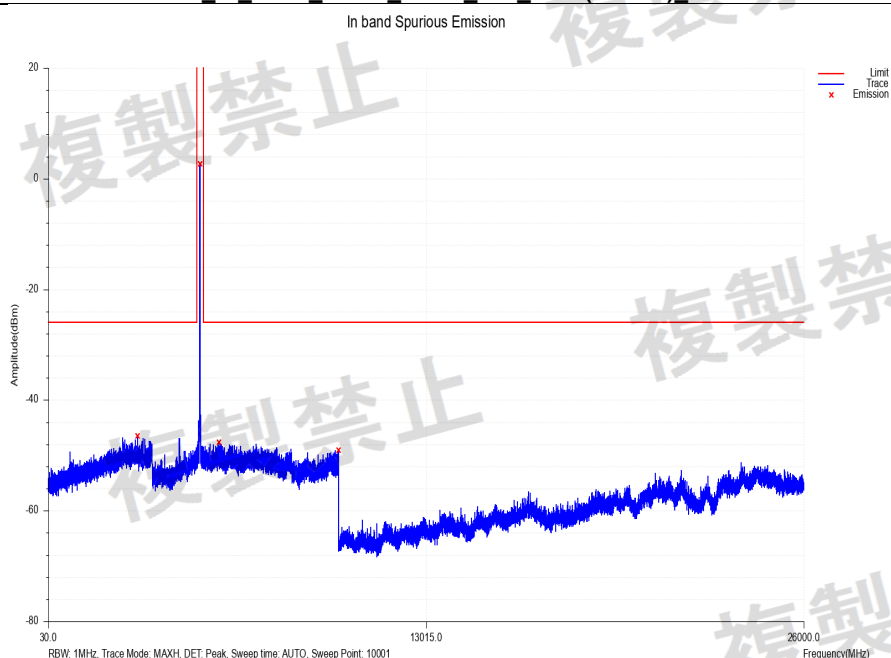
In band Spurious Emission

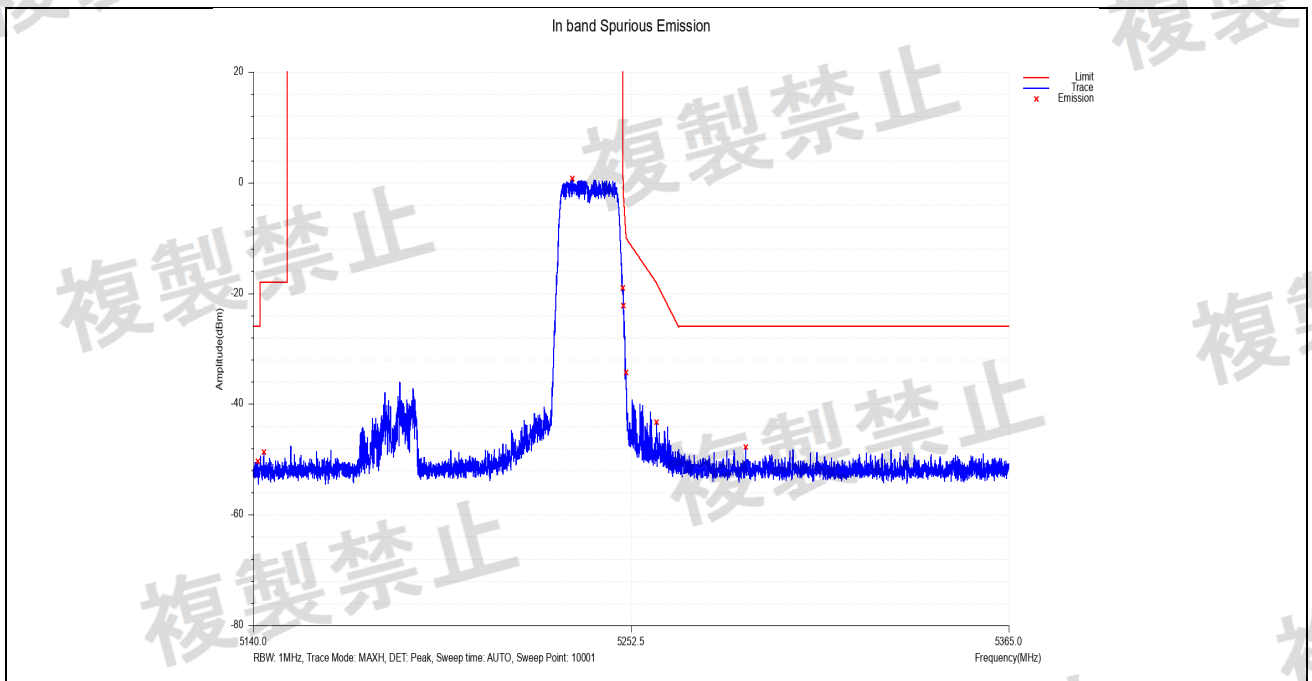
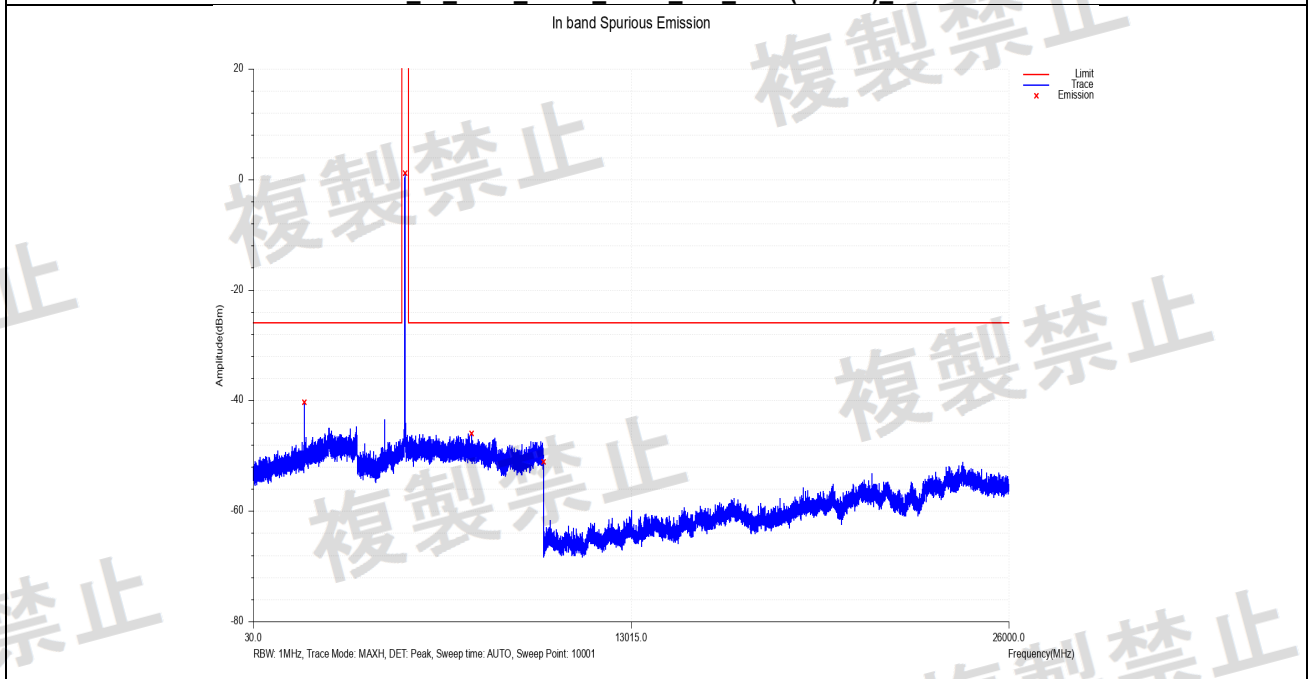
**Out_of_band_NVNT_ANT1_802_11ac(VHT20)_5200**

In band Spurious Emission

**In_band_NVNT_ANT2_802_11ac(VHT20)_5200**

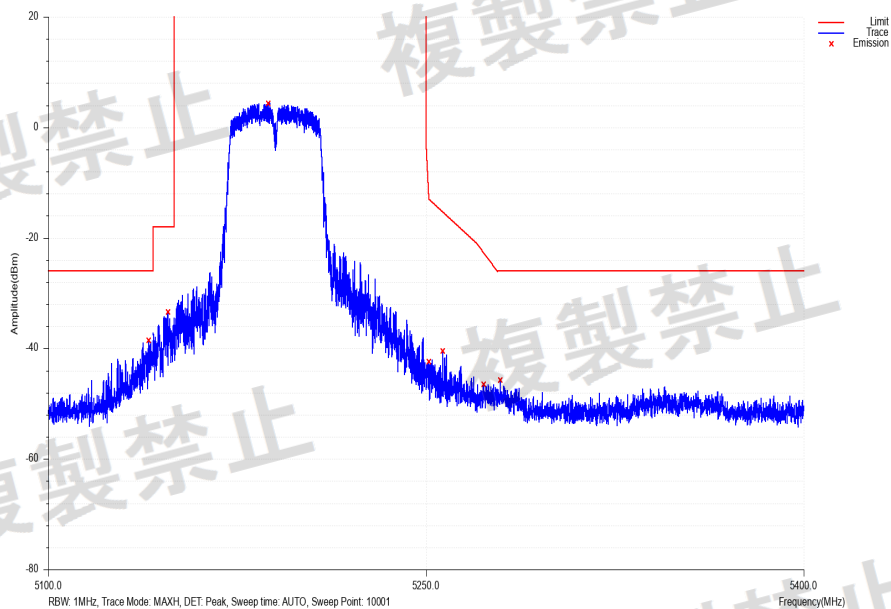
**Out_of_band_NVNT_ANT2_802_11ac(VHT20)_5200**

In_band_NVNT_ANT1_802_11ac(VHT20)_5240**Out_of_band_NVNT_ANT1_802_11ac(VHT20)_5240****In_band_NVNT_ANT2_802_11ac(VHT20)_5240**

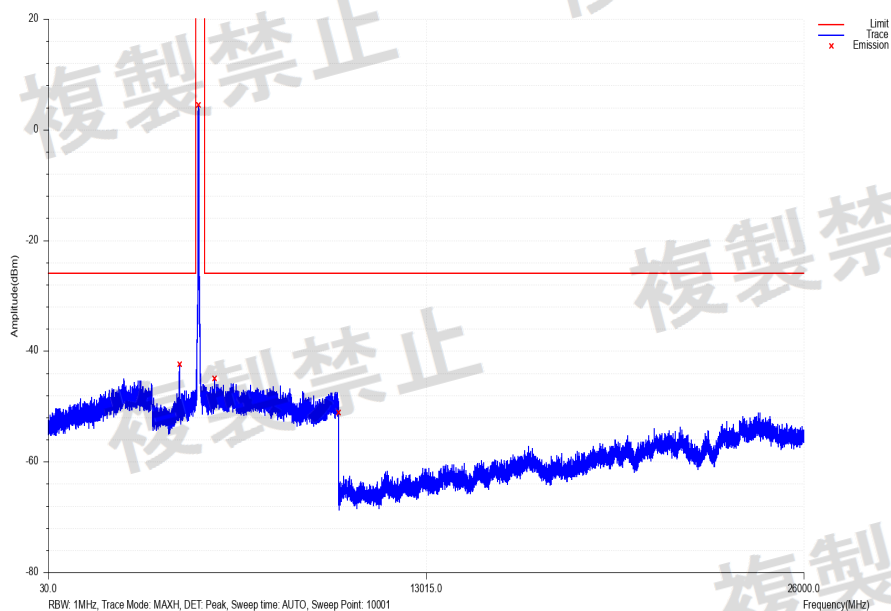
**Out_of band NVNT_ANT2_802_11ac(VHT20)_5240**

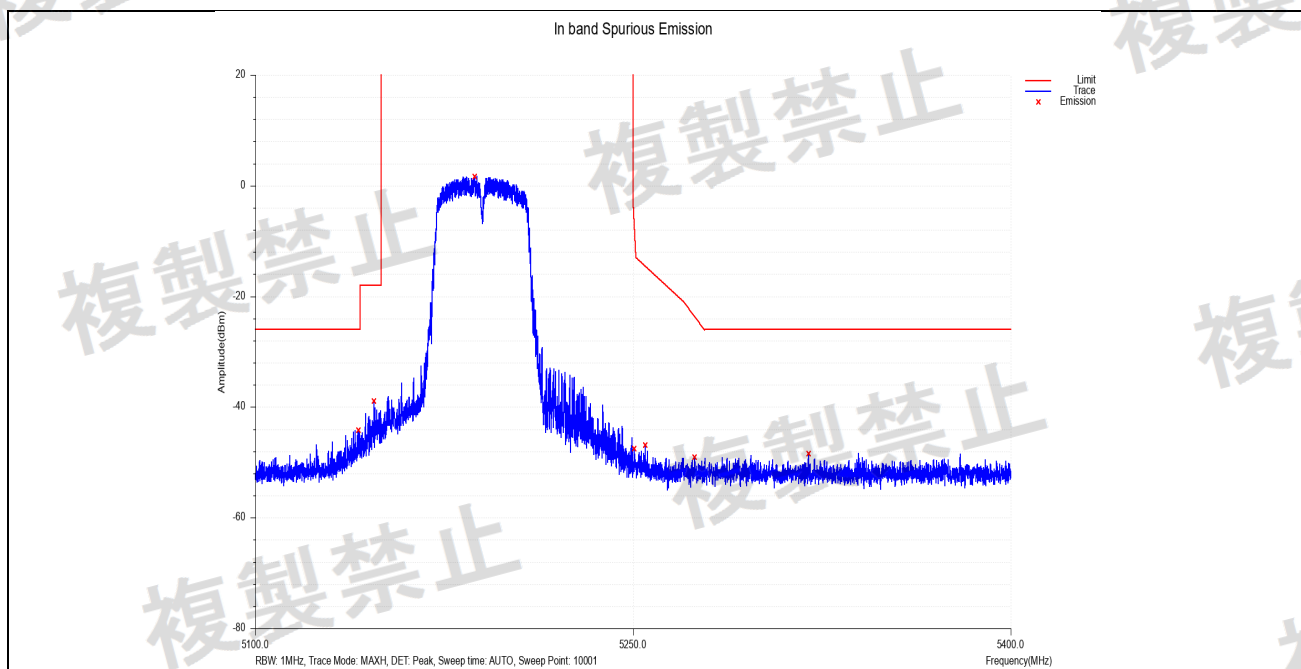
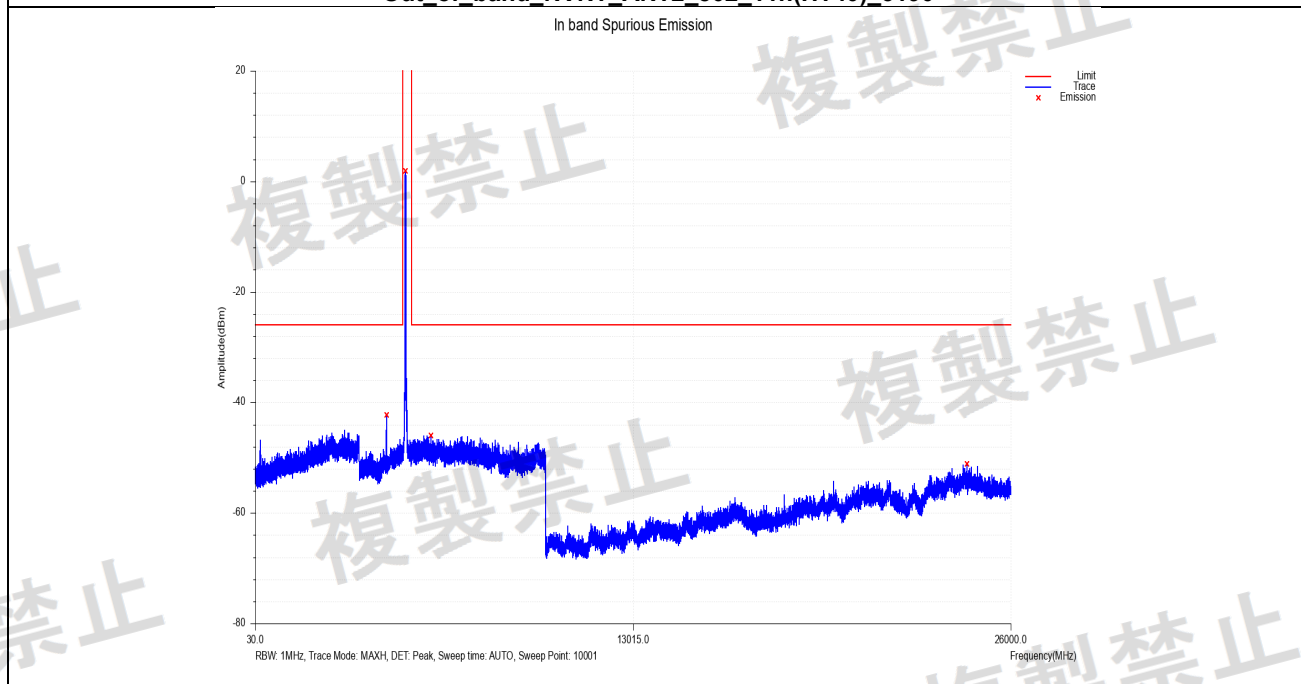
**In_band_NVNT_ANT1_802_11n(HT40)_5190**

In band Spurious Emission

**Out_of_band_NVNT_ANT1_802_11n(HT40)_5190**

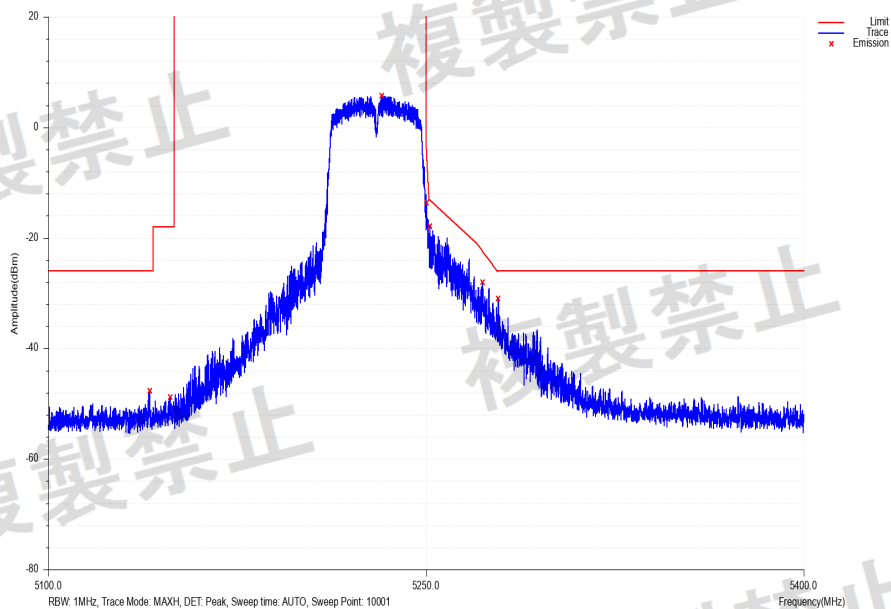
In band Spurious Emission

**In_band_NVNT_ANT2_802_11n(HT40)_5190**

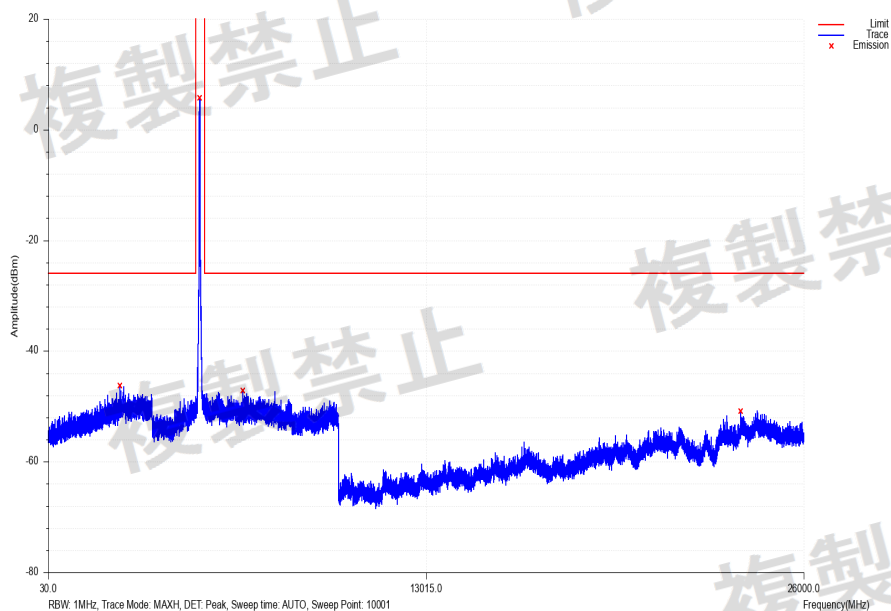
**Out of band NVNT_ANT2_802_11n(HT40)_5190**

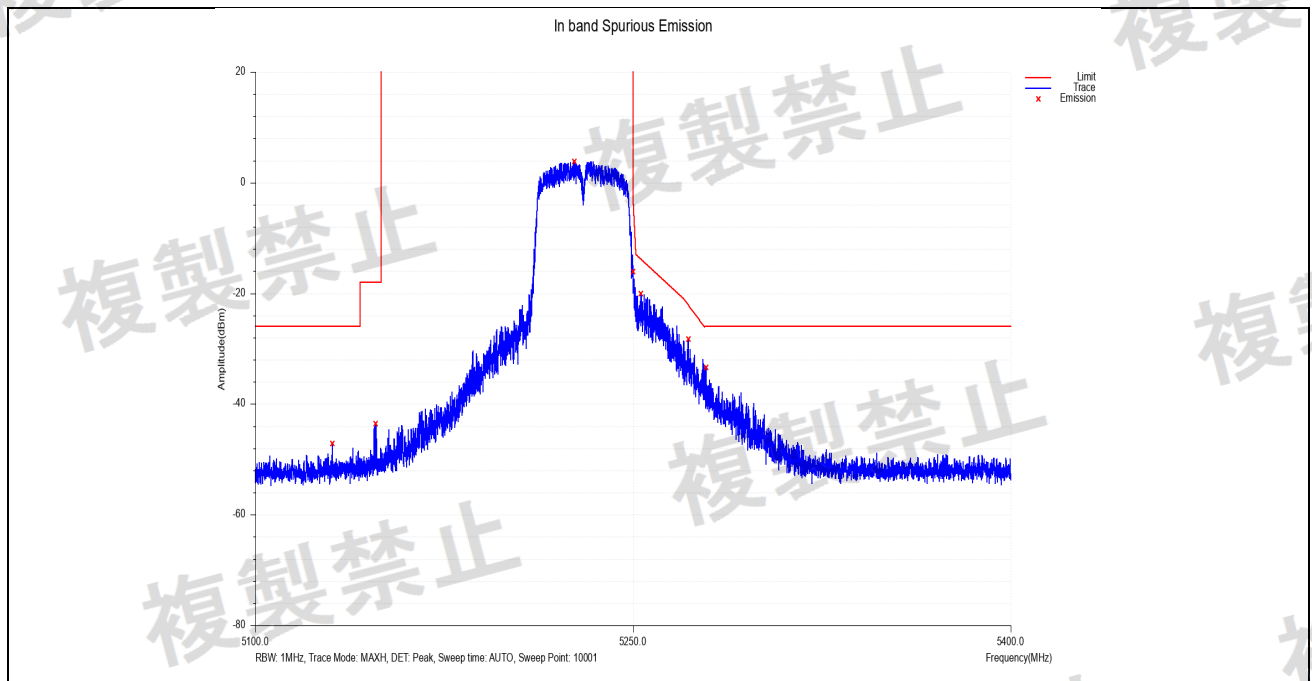
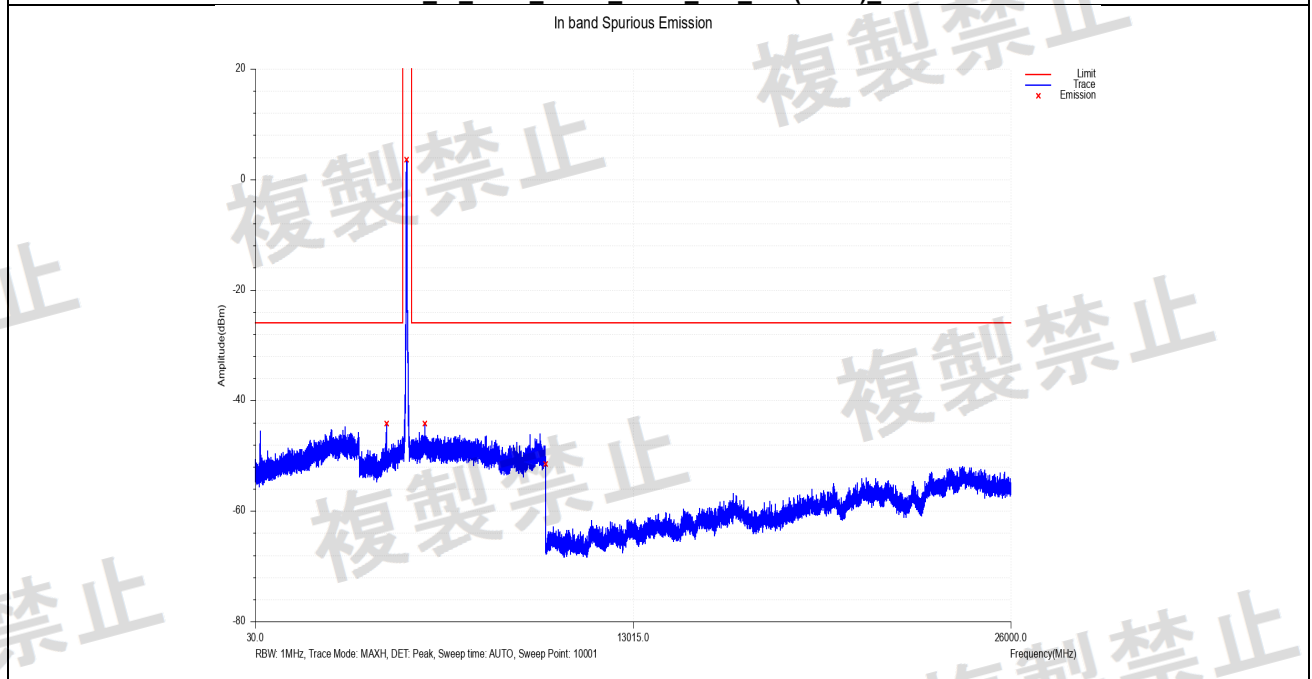
**In_band_NVNT_ANT1_802_11n(HT40)_5230**

In band Spurious Emission

**Out_of_band_NVNT_ANT1_802_11n(HT40)_5230**

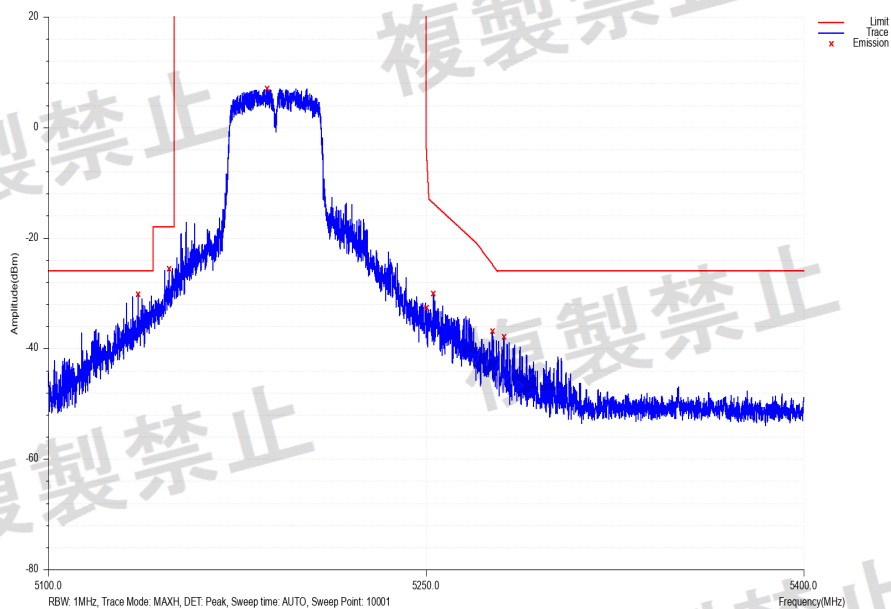
In band Spurious Emission

**In_band_NVNT_ANT2_802_11n(HT40)_5230**

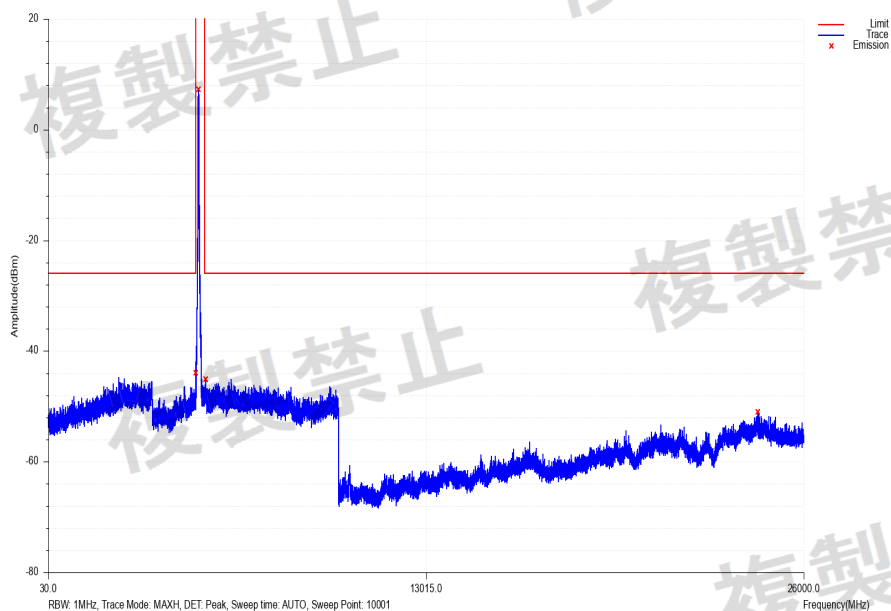
**Out of band NVNT_ANT2_802_11n(HT40)_5230**

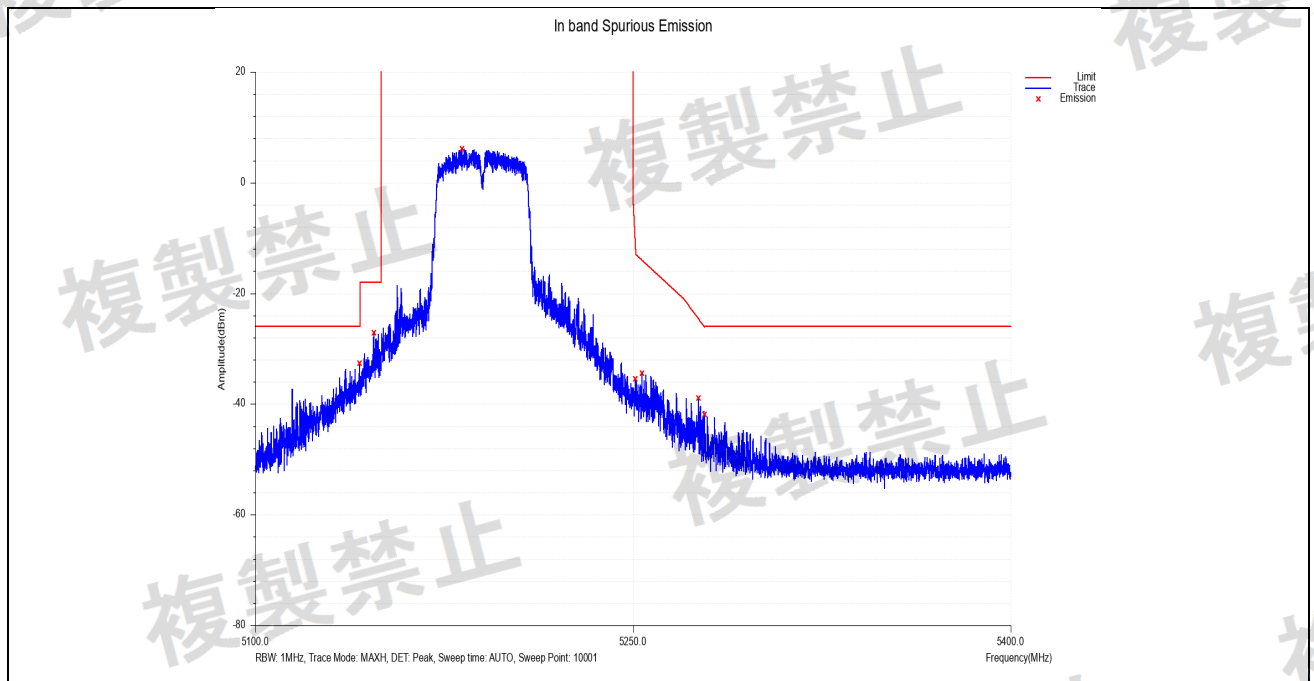
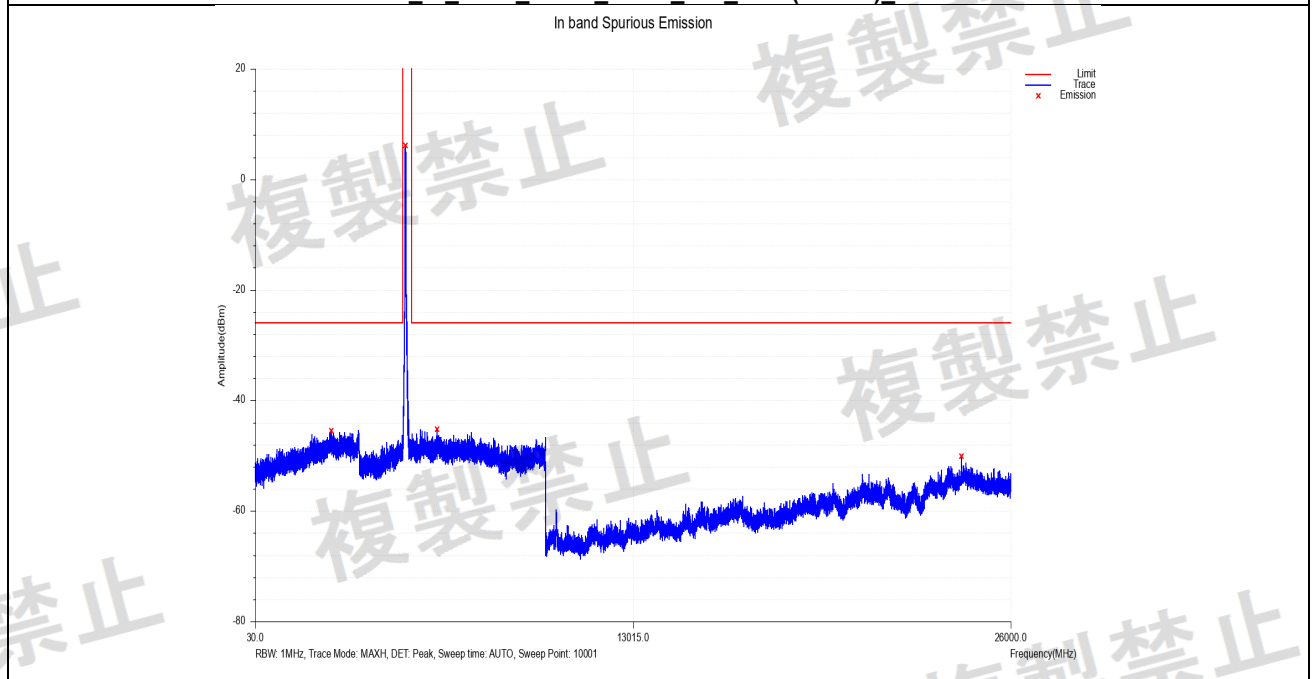
**In_band_NVNT_ANT1_802_11ac(VHT40)_5190**

In band Spurious Emission

**Out_of_band_NVNT_ANT1_802_11ac(VHT40)_5190**

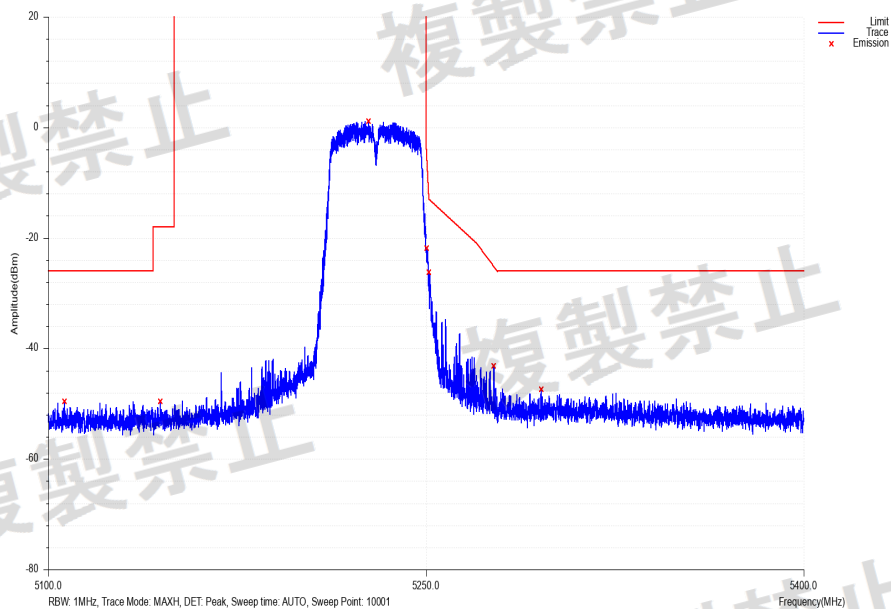
In band Spurious Emission

**In_band_NVNT_ANT2_802_11ac(VHT40)_5190**

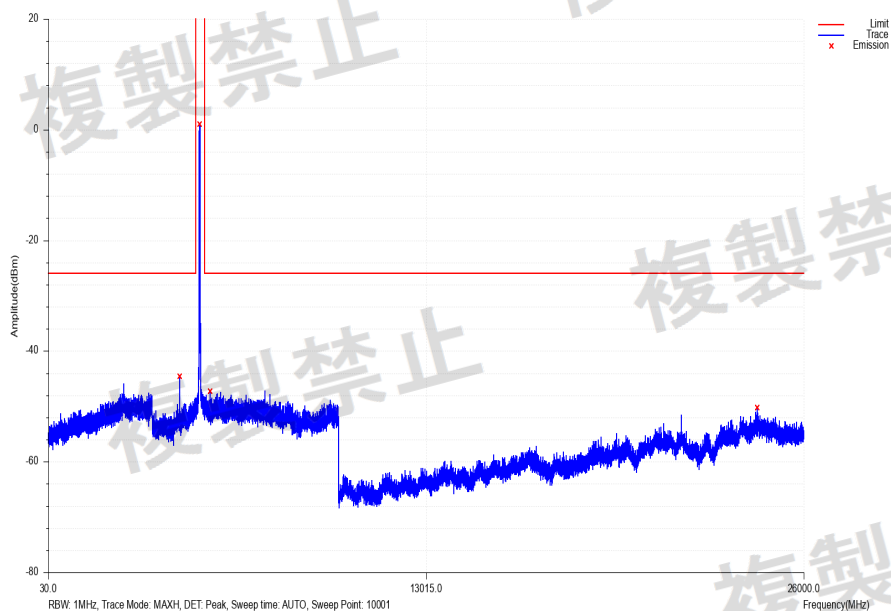
**Out_of band NVNT_ANT2_802_11ac(VHT40)_5190**

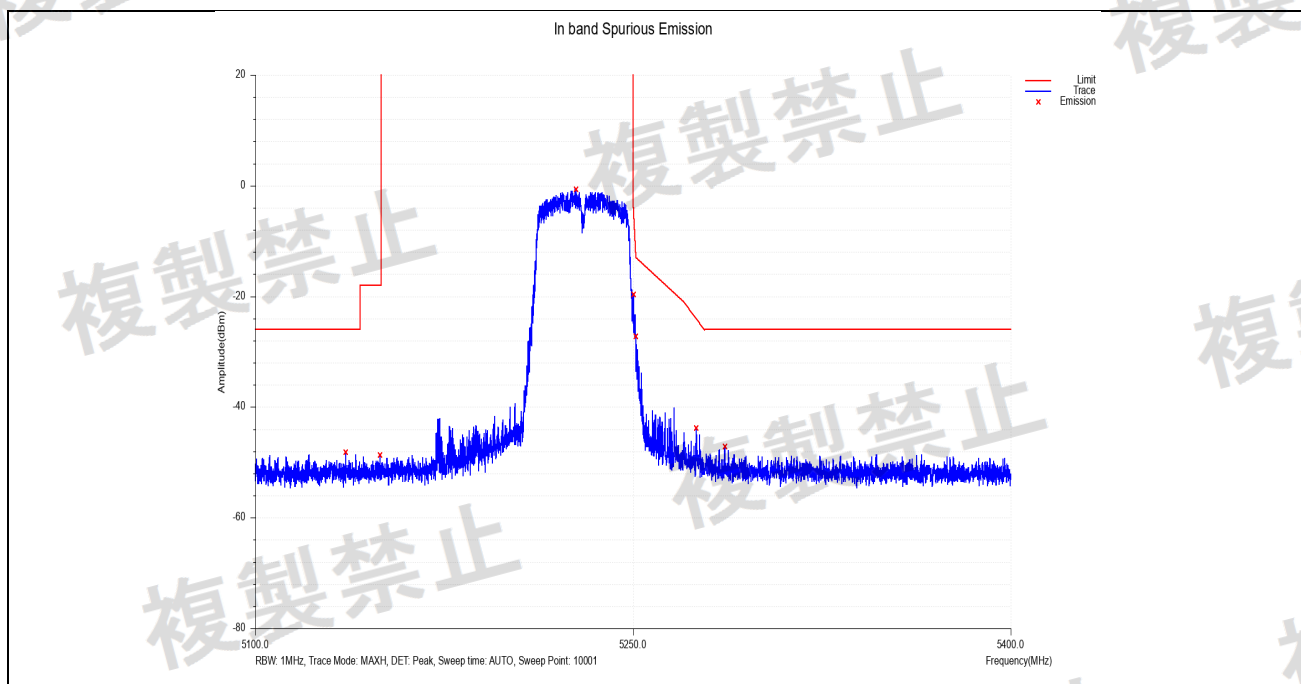
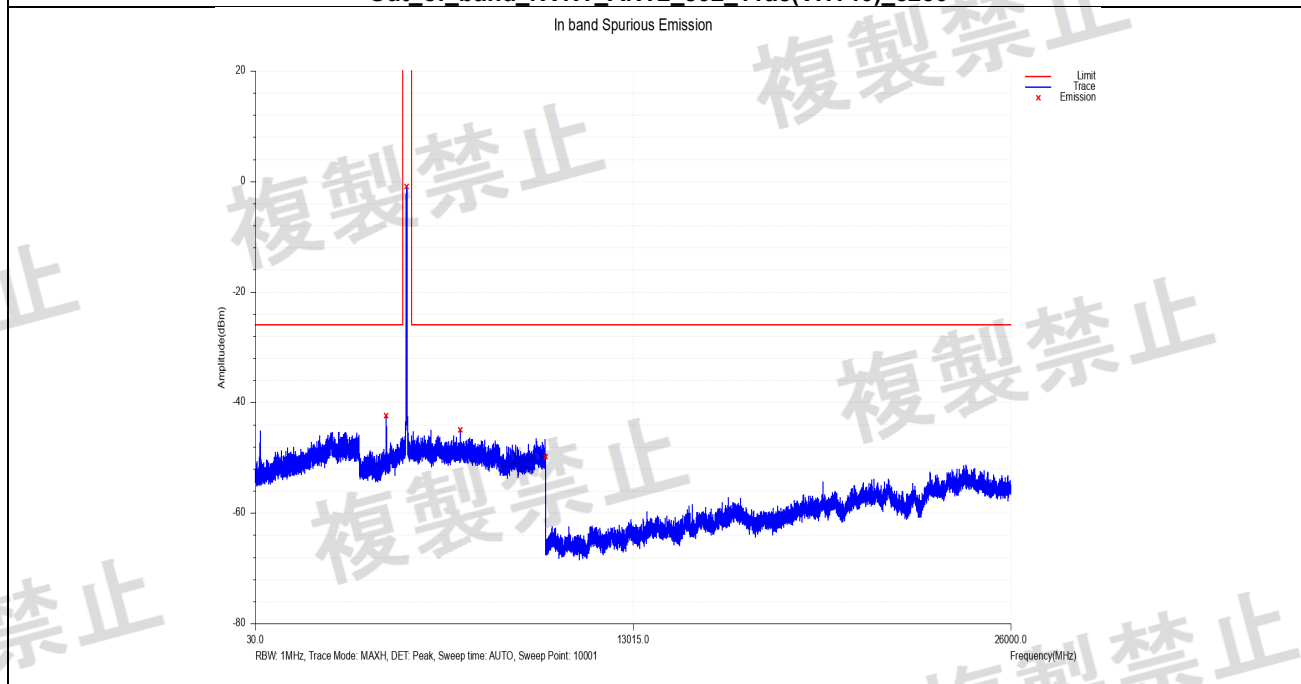
**In_band_NVNT_ANT1_802_11ac(VHT40)_5230**

In band Spurious Emission

**Out_of_band_NVNT_ANT1_802_11ac(VHT40)_5230**

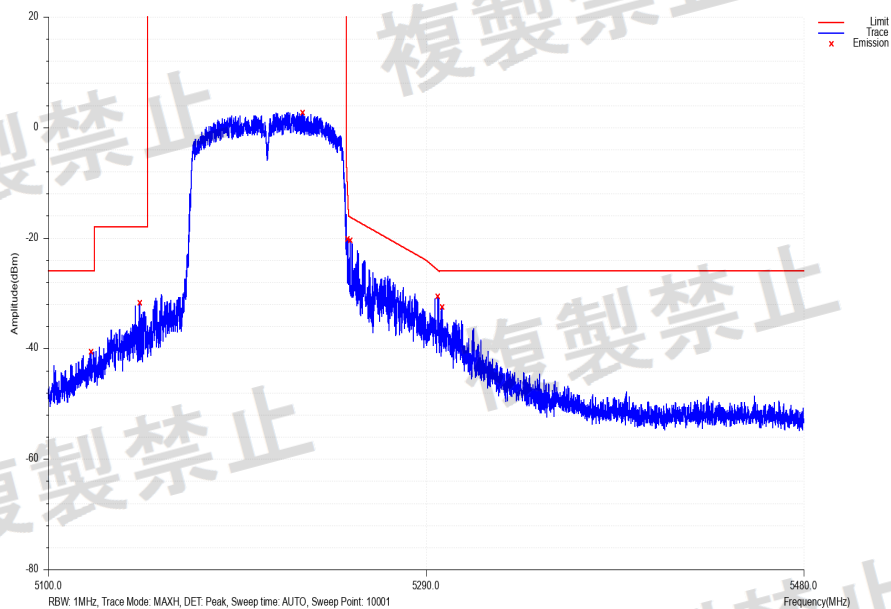
In band Spurious Emission

**In_band_NVNT_ANT2_802_11ac(VHT40)_5230**

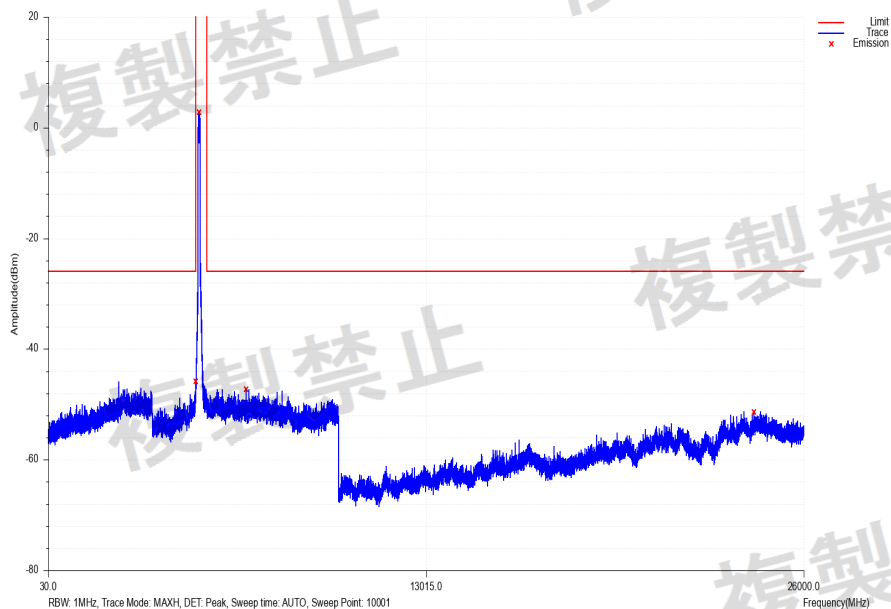
**Out_of_band_NVNT_ANT2_802_11ac(VHT40)_5230**

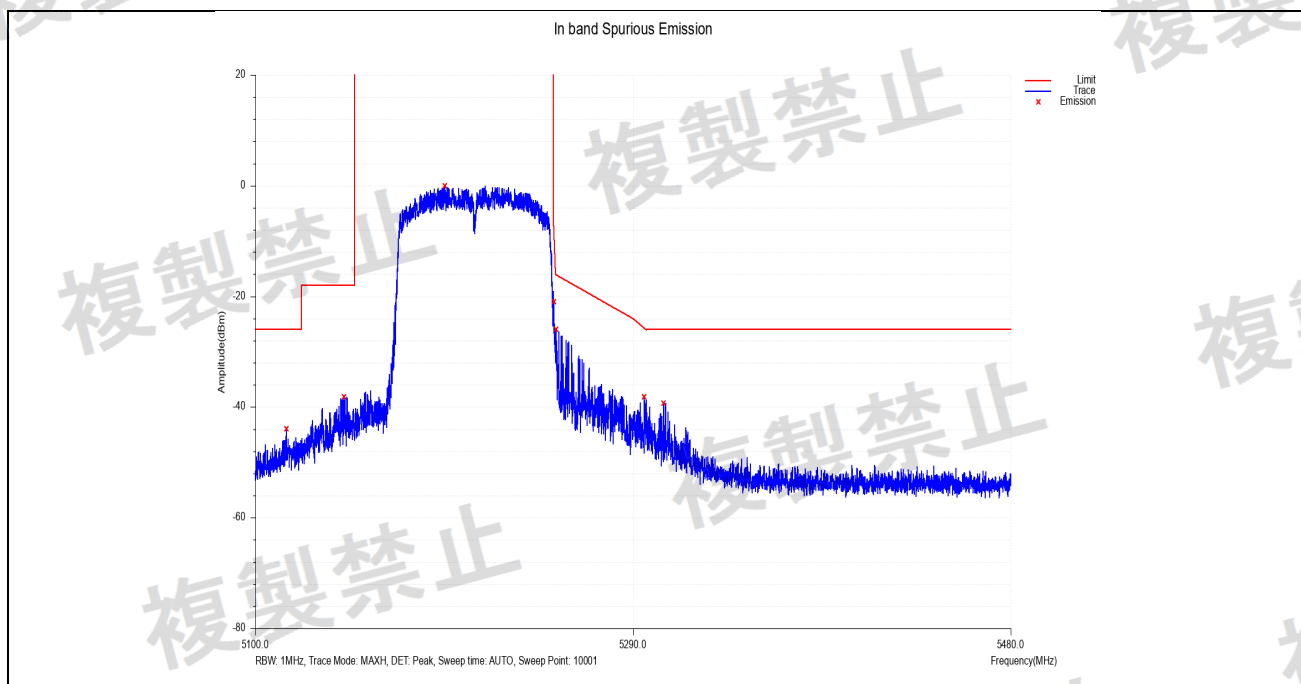
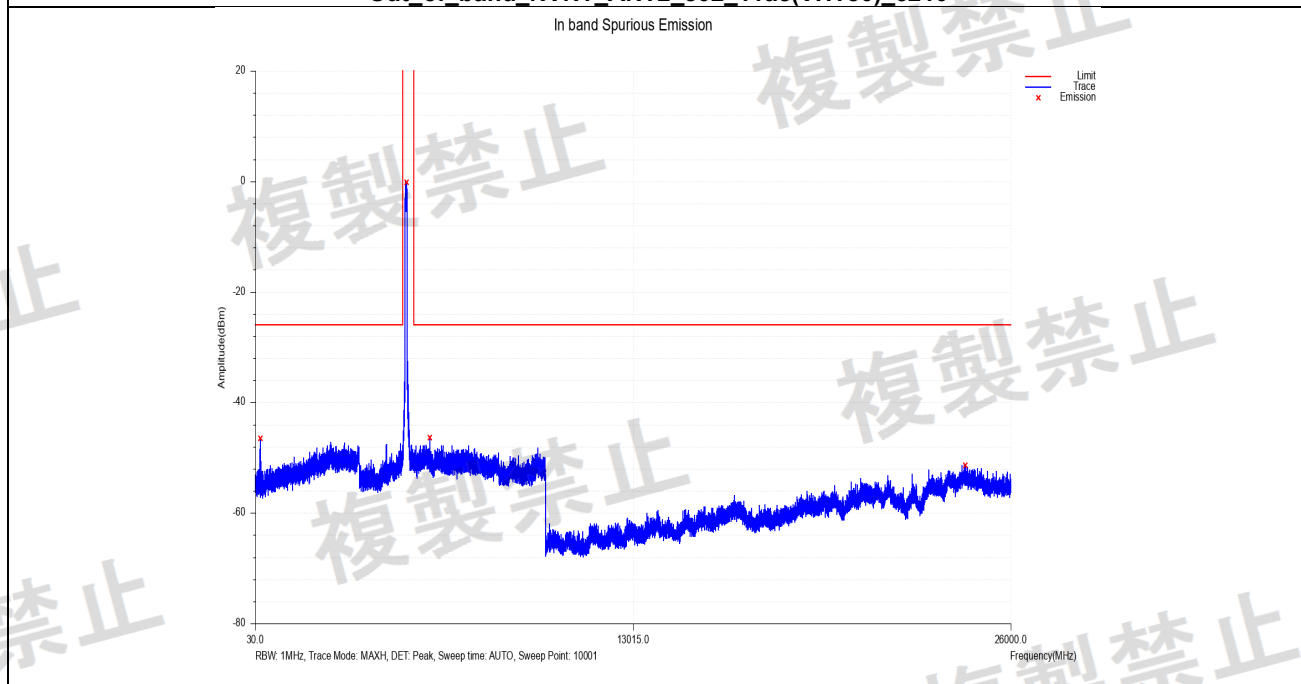
In_band_NVNT_ANT1_802_11ac(VHT80)_5210

In band Spurious Emission

**Out_of_band_NVNT_ANT1_802_11ac(VHT80)_5210**

In band Spurious Emission

**In_band_NVNT_ANT2_802_11ac(VHT80)_5210**

**Out_of_band_NVNT_ANT2_802_11ac(VHT80)_5210**



Appendix A.5: Test Results of Spurious Emissions for Receiver

Test Result

Condition	ANT	Mode	Channel	Range (MHz)	RBW (kHz)	Spur. Freq. (MHz)	Spur. Lev. (dBm)	Spur. Lev	Limit	Over 1/10 Limit	Result
NVNT	ANT1	802.11a	LCH	30.0~1000.0	100	532.46	-85.12	0.0030nW	4nW	NO	Pass
NVNT	ANT1	802.11a	LCH	1000.0~13000.0	1000	12880.00	-70.41	0.0909nW	20nW	NO	Pass
NVNT	ANT2	802.11a	LCH	30.0~1000.0	100	819.58	-84.60	0.0034nW	4nW	NO	Pass
NVNT	ANT2	802.11a	LCH	1000.0~13000.0	1000	2440.00	-61.21	0.7559nW	20nW	NO	Pass
NVNT	ANT1	802.11a	MCH	30.0~1000.0	100	924.34	-85.06	0.0031nW	4nW	NO	Pass
NVNT	ANT1	802.11a	MCH	1000.0~13000.0	1000	2440.00	-58.23	1.5043nW	20nW	NO	Pass
NVNT	ANT2	802.11a	MCH	30.0~1000.0	100	950.53	-84.73	0.0033nW	4nW	NO	Pass
NVNT	ANT2	802.11a	MCH	1000.0~13000.0	1000	2440.00	-59.97	1.0059nW	20nW	NO	Pass
NVNT	ANT1	802.11a	HCH	30.0~1000.0	100	815.70	-84.70	0.0033nW	4nW	NO	Pass
NVNT	ANT1	802.11a	HCH	1000.0~13000.0	1000	2440.00	-61.53	0.7026nW	20nW	NO	Pass
NVNT	ANT2	802.11a	HCH	30.0~1000.0	100	779.81	-85.38	0.0028nW	4nW	NO	Pass
NVNT	ANT2	802.11a	HCH	1000.0~13000.0	1000	5176.00	-64.92	0.3221nW	20nW	NO	Pass
NVNT	ANT1	802.11n(HT20)	LCH	30.0~1000.0	100	642.07	-85.09	0.0030nW	4nW	NO	Pass
NVNT	ANT1	802.11n(HT20)	LCH	1000.0~13000.0	1000	2440.00	-58.08	1.5542nW	20nW	NO	Pass
NVNT	ANT2	802.11n(HT20)	LCH	30.0~1000.0	100	973.81	-84.95	0.0032nW	4nW	NO	Pass
NVNT	ANT2	802.11n(HT20)	LCH	1000.0~13000.0	1000	2440.00	-60.76	0.8394nW	20nW	NO	Pass
NVNT	ANT1	802.11n(HT20)	MCH	30.0~1000.0	100	909.79	-84.66	0.0034nW	4nW	NO	Pass
NVNT	ANT1	802.11n(HT20)	MCH	1000.0~13000.0	1000	2440.00	-59.76	1.0556nW	20nW	NO	Pass
NVNT	ANT2	802.11n(HT20)	MCH	30.0~1000.0	100	876.81	-84.45	0.0035nW	4nW	NO	Pass
NVNT	ANT2	802.11n(HT20)	MCH	1000.0~13000.0	1000	2440.00	-59.65	1.0849nW	20nW	NO	Pass
NVNT	ANT1	802.11n(HT20)	HCH	30.0~1000.0	100	638.19	-84.21	0.0037nW	4nW	NO	Pass
NVNT	ANT1	802.11n(HT20)	HCH	1000.0~13000.0	1000	2440.00	-59.53	1.1154nW	20nW	NO	Pass
NVNT	ANT2	802.11n(HT20)	HCH	30.0~1000.0	100	779.81	-85.25	0.0029nW	4nW	NO	Pass
NVNT	ANT2	802.11n(HT20)	HCH	1000.0~13000.0	1000	2440.00	-61.10	0.7766nW	20nW	NO	Pass
NVNT	ANT1	802.11ac(VHT20)	LCH	30.0~1000.0	100	889.42	-84.99	0.0031nW	4nW	NO	Pass
NVNT	ANT1	802.11ac(VHT20)	LCH	1000.0~13000.0	1000	2440.00	-59.78	1.0529nW	20nW	NO	Pass
NVNT	ANT2	802.11ac(VHT20)	LCH	30.0~1000.0	100	887.48	-84.97	0.0031nW	4nW	NO	Pass
NVNT	ANT2	802.11ac(VHT20)	LCH	1000.0~13000.0	1000	2440.00	-62.59	0.5502nW	20nW	NO	Pass
NVNT	ANT1	802.11ac(VHT20)	MCH	30.0~1000.0	100	766.23	-84.89	0.0032nW	4nW	NO	Pass
NVNT	ANT1	802.11ac(VHT20)	MCH	1000.0~13000.0	1000	2440.00	-59.97	1.0073nW	20nW	NO	Pass
NVNT	ANT2	802.11ac(VHT20)	MCH	30.0~1000.0	100	817.64	-84.44	0.0035nW	4nW	NO	Pass
NVNT	ANT2	802.11ac(VHT20)	MCH	1000.0~13000.0	1000	2440.00	-58.34	1.4670nW	20nW	NO	Pass
NVNT	ANT1	802.11ac(VHT20)	HCH	30.0~1000.0	100	548.95	-84.80	0.0033nW	4nW	NO	Pass
NVNT	ANT1	802.11ac(VHT20)	HCH	1000.0~13000.0	1000	2440.00	-59.26	1.1864nW	20nW	NO	Pass
NVNT	ANT2	802.11ac(VHT20)	HCH	30.0~1000.0	100	752.65	-85.30	0.0029nW	4nW	NO	Pass
NVNT	ANT2	802.11ac(VHT20)	HCH	1000.0~13000.0	1000	2440.00	-60.06	0.9868nW	20nW	NO	Pass
NVNT	ANT1	802.11n(HT40)	LCH	30.0~1000.0	100	827.34	-85.17	0.0030nW	4nW	NO	Pass
NVNT	ANT1	802.11n(HT40)	LCH	1000.0~13000.0	1000	2440.00	-61.15	0.7673nW	20nW	NO	Pass
NVNT	ANT2	802.11n(HT40)	LCH	30.0~1000.0	100	687.66	-85.24	0.0029nW	4nW	NO	Pass
NVNT	ANT2	802.11n(HT40)	LCH	1000.0~13000.0	1000	2440.00	-61.70	0.6765nW	20nW	NO	Pass
NVNT	ANT1	802.11n(HT40)	HCH	30.0~1000.0	100	869.05	-85.14	0.0030nW	4nW	NO	Pass
NVNT	ANT1	802.11n(HT40)	HCH	1000.0~13000.0	1000	5176.00	-67.68	0.1706nW	20nW	NO	Pass
NVNT	ANT2	802.11n(HT40)	HCH	30.0~1000.0	100	783.69	-85.01	0.0031nW	4nW	NO	Pass
NVNT	ANT2	802.11n(HT40)	HCH	1000.0~13000.0	1000	5176.00	-67.70	0.1697nW	20nW	NO	Pass
NVNT	ANT1	802.11ac(VHT40)	LCH	30.0~1000.0	100	519.85	-85.14	0.0030nW	4nW	NO	Pass
NVNT	ANT1	802.11ac(VHT40)	LCH	1000.0~13000.0	1000	2440.00	-60.90	0.8131nW	20nW	NO	Pass
NVNT	ANT2	802.11ac(VHT40)	LCH	30.0~1000.0	100	416.06	-85.26	0.0029nW	4nW	NO	Pass
NVNT	ANT2	802.11ac(VHT40)	LCH	1000.0~13000.0	1000	2440.00	-61.31	0.7397nW	20nW	NO	Pass
NVNT	ANT1	802.11ac(VHT40)	HCH	30.0~1000.0	100	694.45	-84.92	0.0032nW	4nW	NO	Pass
NVNT	ANT1	802.11ac(VHT40)	HCH	1000.0~13000.0	1000	2440.00	-63.67	0.4298nW	20nW	NO	Pass
NVNT	ANT2	802.11ac(VHT40)	HCH	30.0~1000.0	100	708.03	-84.80	0.0033nW	4nW	NO	Pass
NVNT	ANT2	802.11ac(VHT40)	HCH	1000.0~13000.0	1000	2440.00	-59.82	1.0414nW	20nW	NO	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	30.0~1000.0	100	813.76	-84.55	0.0035nW	4nW	NO	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	1000.0~13000.0	1000	5188.00	-61.30	0.7406nW	20nW	NO	Pass
NVNT	ANT2	802.11ac(VHT80)	MCH	30.0~1000.0	100	779.81	-84.65	0.0034nW	4nW	NO	Pass
NVNT	ANT2	802.11ac(VHT80)	MCH	1000.0~13000.0	1000	2440.00	-54.12	3.8707nW	20nW	NO	Pass

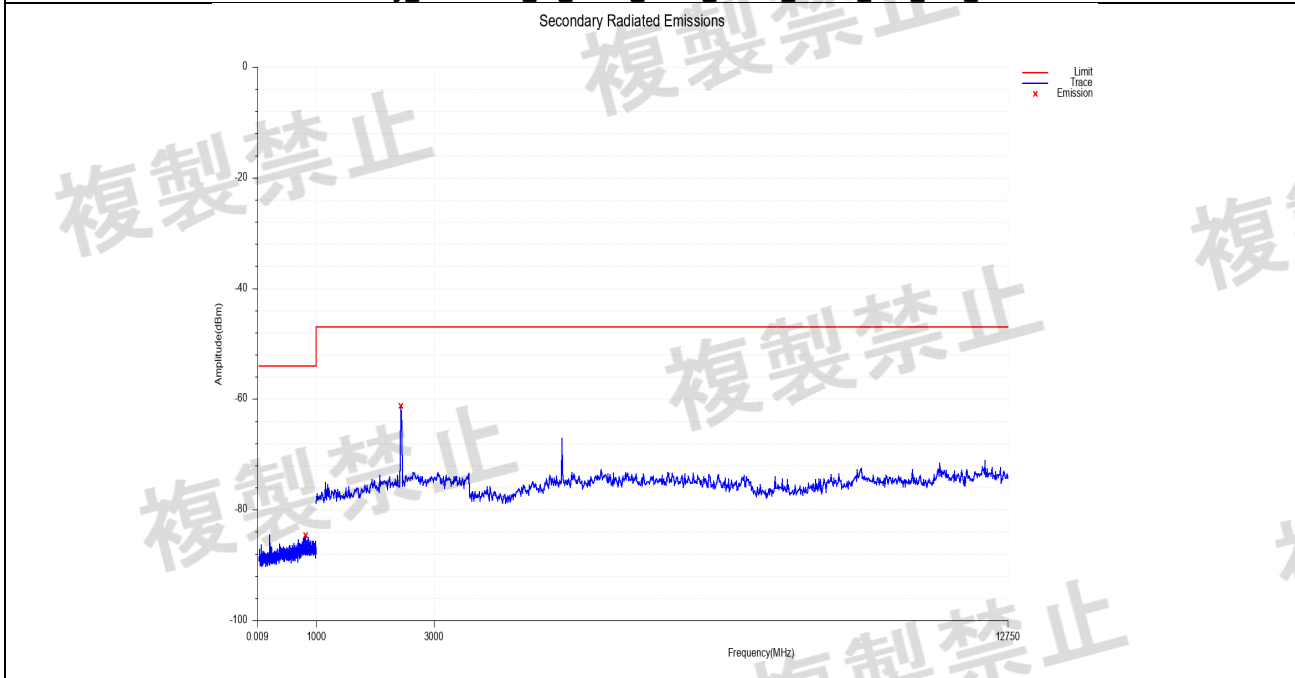
MOMO Mode(1/2 Limit)

ANT	Mode	Channel	Range (MHz)	RBW (kHz)	Spur. Freq. (MHz)	Spur. Lev. (dBm)	Spur. Lev (nW)	1/2 Limit (nW)	Result
ANT1	802.11n(HT20)	LCH	30.0~1000.0	100	642.07	-85.09	0.0030	2	Pass
ANT1	802.11n(HT20)	LCH	1000.0~13000.0	1000	2440.00	-58.08	1.5542	10	Pass
ANT2	802.11n(HT20)	LCH	30.0~1000.0	100	973.81	-84.95	0.0032	2	Pass
ANT2	802.11n(HT20)	LCH	1000.0~13000.0	1000	2440.00	-60.76	0.8394	10	Pass
ANT1	802.11n(HT20)	MCH	30.0~1000.0	100	909.79	-84.66	0.0034	2	Pass
ANT1	802.11n(HT20)	MCH	1000.0~13000.0	1000	2440.00	-59.76	1.0556	10	Pass
ANT2	802.11n(HT20)	MCH	30.0~1000.0	100	876.81	-84.45	0.0035	2	Pass
ANT2	802.11n(HT20)	MCH	1000.0~13000.0	1000	2440.00	-59.65	1.0849	10	Pass
ANT1	802.11n(HT20)	HCH	30.0~1000.0	100	638.19	-84.21	0.0037	2	Pass
ANT1	802.11n(HT20)	HCH	1000.0~13000.0	1000	2440.00	-59.53	1.1154	10	Pass
ANT2	802.11n(HT20)	HCH	30.0~1000.0	100	779.81	-85.25	0.0029	2	Pass
ANT2	802.11n(HT20)	HCH	1000.0~13000.0	1000	2440.00	-61.10	0.7766	10	Pass
ANT1	802.11ac(VHT20)	LCH	30.0~1000.0	100	889.42	-84.99	0.0031	2	Pass
ANT1	802.11ac(VHT20)	LCH	1000.0~13000.0	1000	2440.00	-59.78	1.0529	10	Pass
ANT2	802.11ac(VHT20)	LCH	30.0~1000.0	100	887.48	-84.97	0.0031	2	Pass
ANT2	802.11ac(VHT20)	LCH	1000.0~13000.0	1000	2440.00	-62.59	0.5502	10	Pass
ANT1	802.11ac(VHT20)	MCH	30.0~1000.0	100	766.23	-84.89	0.0032	2	Pass
ANT1	802.11ac(VHT20)	MCH	1000.0~13000.0	1000	2440.00	-59.97	1.0073	10	Pass
ANT2	802.11ac(VHT20)	MCH	30.0~1000.0	100	817.64	-84.44	0.0035	2	Pass
ANT2	802.11ac(VHT20)	MCH	1000.0~13000.0	1000	2440.00	-58.34	1.4670	10	Pass
ANT1	802.11ac(VHT20)	HCH	30.0~1000.0	100	548.95	-84.80	0.0033	2	Pass
ANT1	802.11ac(VHT20)	HCH	1000.0~13000.0	1000	2440.00	-59.26	1.1864	10	Pass
ANT2	802.11ac(VHT20)	HCH	30.0~1000.0	100	752.65	-85.30	0.0029	2	Pass
ANT2	802.11ac(VHT20)	HCH	1000.0~13000.0	1000	2440.00	-60.06	0.9868	10	Pass
ANT1	802.11n(HT40)	LCH	30.0~1000.0	100	827.34	-85.17	0.0030	2	Pass
ANT1	802.11n(HT40)	LCH	1000.0~13000.0	1000	2440.00	-61.15	0.7673	10	Pass
ANT2	802.11n(HT40)	LCH	30.0~1000.0	100	687.66	-85.24	0.0029	2	Pass
ANT2	802.11n(HT40)	LCH	1000.0~13000.0	1000	2440.00	-61.70	0.6765	10	Pass
ANT1	802.11n(HT40)	HCH	30.0~1000.0	100	869.05	-85.14	0.0030	2	Pass
ANT1	802.11n(HT40)	HCH	1000.0~13000.0	1000	5176.00	-67.68	0.1706	10	Pass
ANT2	802.11n(HT40)	HCH	30.0~1000.0	100	783.69	-85.01	0.0031	2	Pass
ANT2	802.11n(HT40)	HCH	1000.0~13000.0	1000	5176.00	-67.70	0.1697	10	Pass
ANT1	802.11ac(VHT40)	LCH	30.0~1000.0	100	519.85	-85.14	0.0030	2	Pass
ANT1	802.11ac(VHT40)	LCH	1000.0~13000.0	1000	2440.00	-60.90	0.8131	10	Pass
ANT2	802.11ac(VHT40)	LCH	30.0~1000.0	100	416.06	-85.26	0.0029	2	Pass
ANT2	802.11ac(VHT40)	LCH	1000.0~13000.0	1000	2440.00	-61.31	0.7397	10	Pass
ANT1	802.11ac(VHT40)	HCH	30.0~1000.0	100	694.45	-84.92	0.0032	2	Pass
ANT1	802.11ac(VHT40)	HCH	1000.0~13000.0	1000	2440.00	-63.67	0.4298	10	Pass
ANT2	802.11ac(VHT40)	HCH	30.0~1000.0	100	708.03	-84.80	0.0033	2	Pass
ANT2	802.11ac(VHT40)	HCH	1000.0~13000.0	1000	2440.00	-59.82	1.0414	10	Pass
ANT1	802.11ac(VHT80)	MCH	30.0~1000.0	100	813.76	-84.55	0.0035	2	Pass
ANT1	802.11ac(VHT80)	MCH	1000.0~13000.0	1000	5188.00	-61.30	0.7406	10	Pass
ANT2	802.11ac(VHT80)	MCH	30.0~1000.0	100	779.81	-84.65	0.0034	2	Pass
ANT2	802.11ac(VHT80)	MCH	1000.0~13000.0	1000	2440.00	-54.12	3.8707	10	Pass

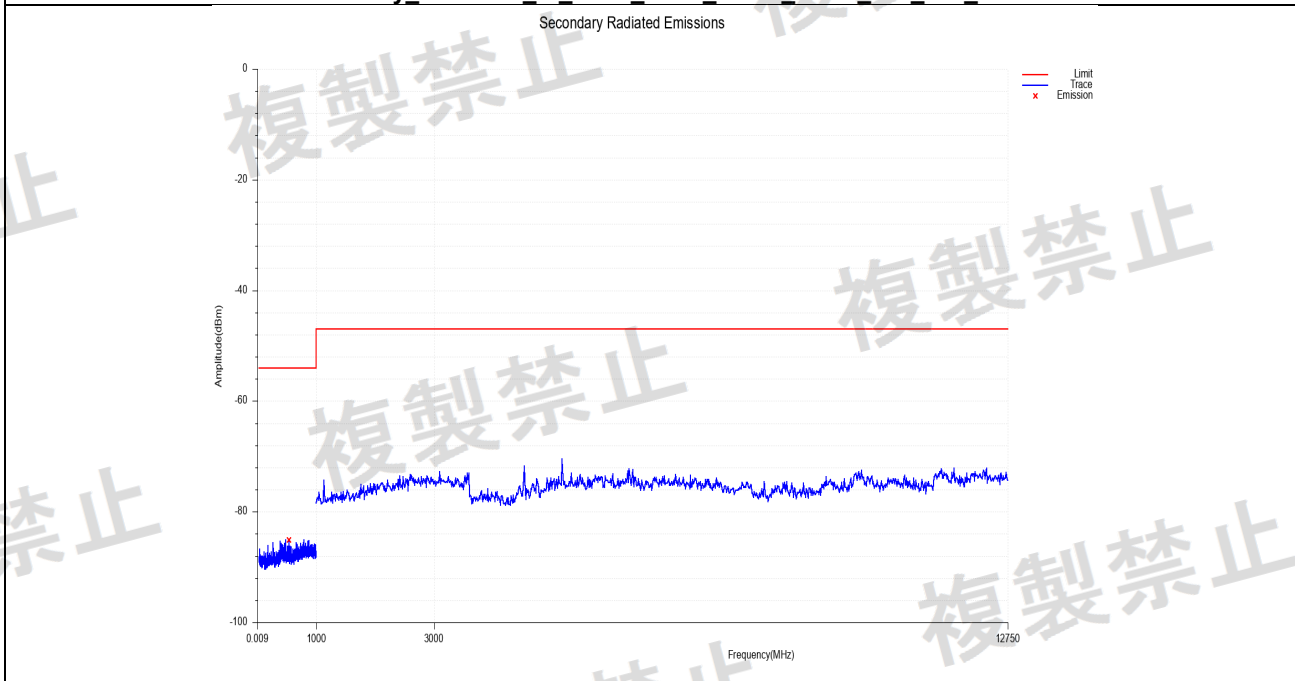


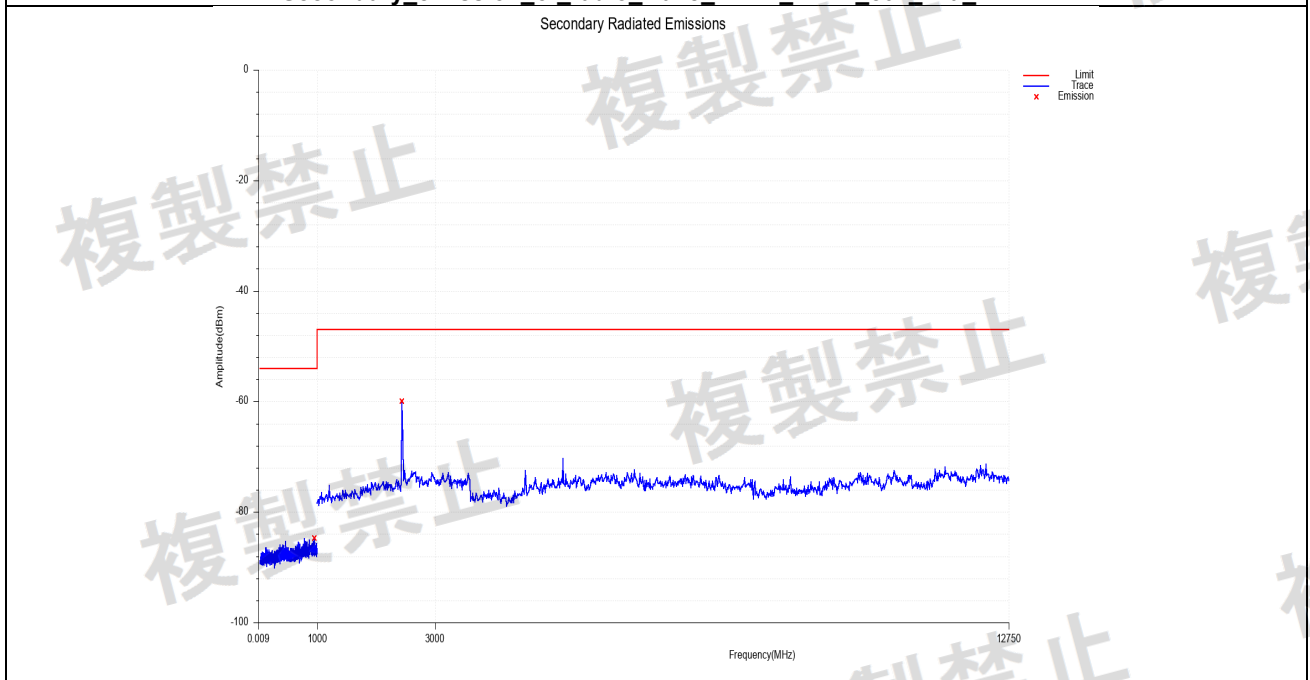
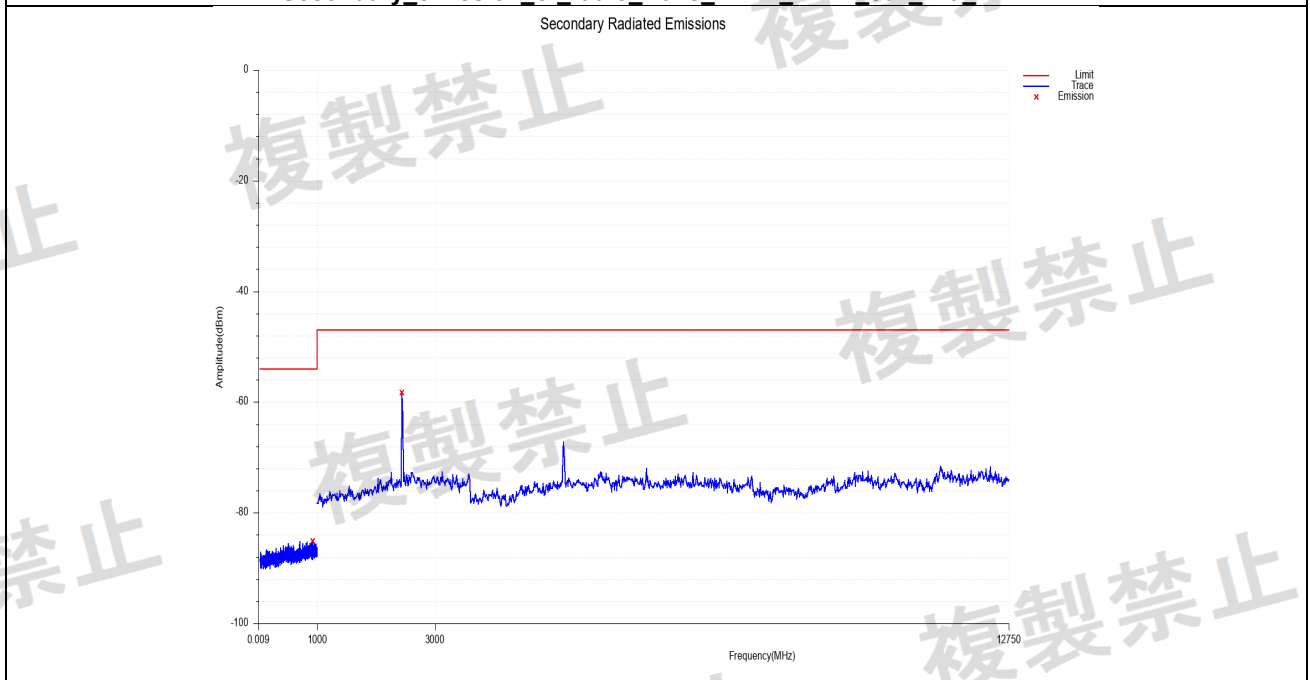
Test Graphs

Secondary emission of radio wave NVNT ANT2 802 11a LCH



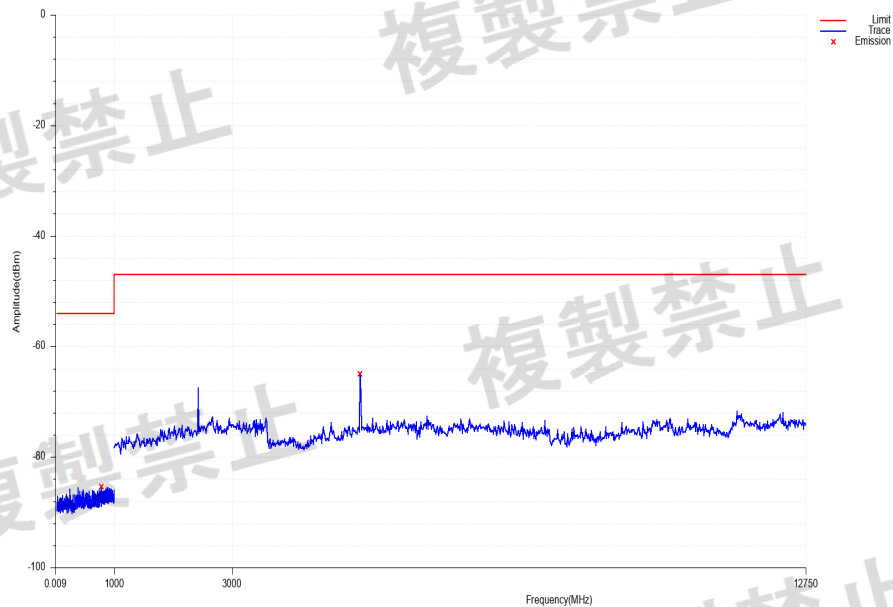
Secondary emission of radio wave NVNT ANT1 802 11a LCH



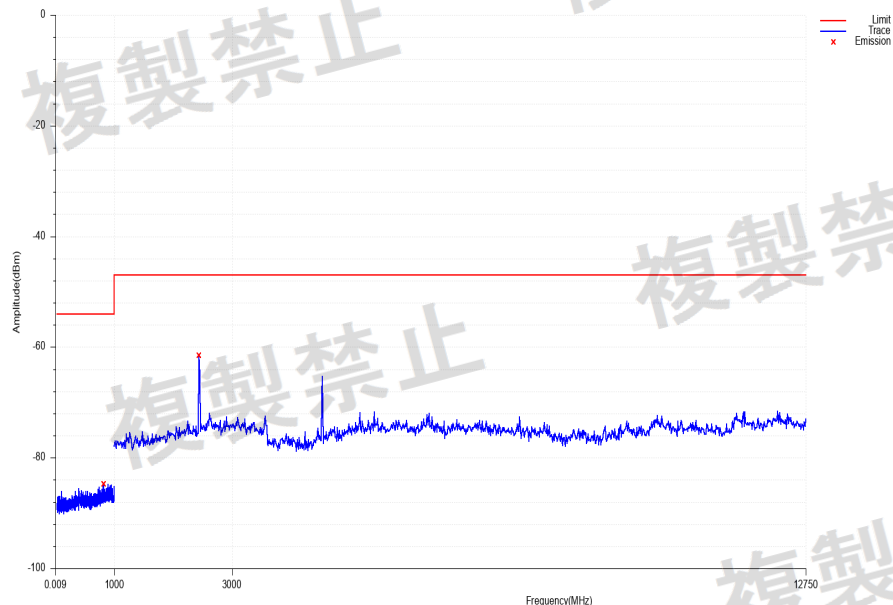
**Secondary emission of radio wave NVNT ANT2 802 11a MCH****Secondary emission of radio wave NVNT ANT1 802 11a MCH**

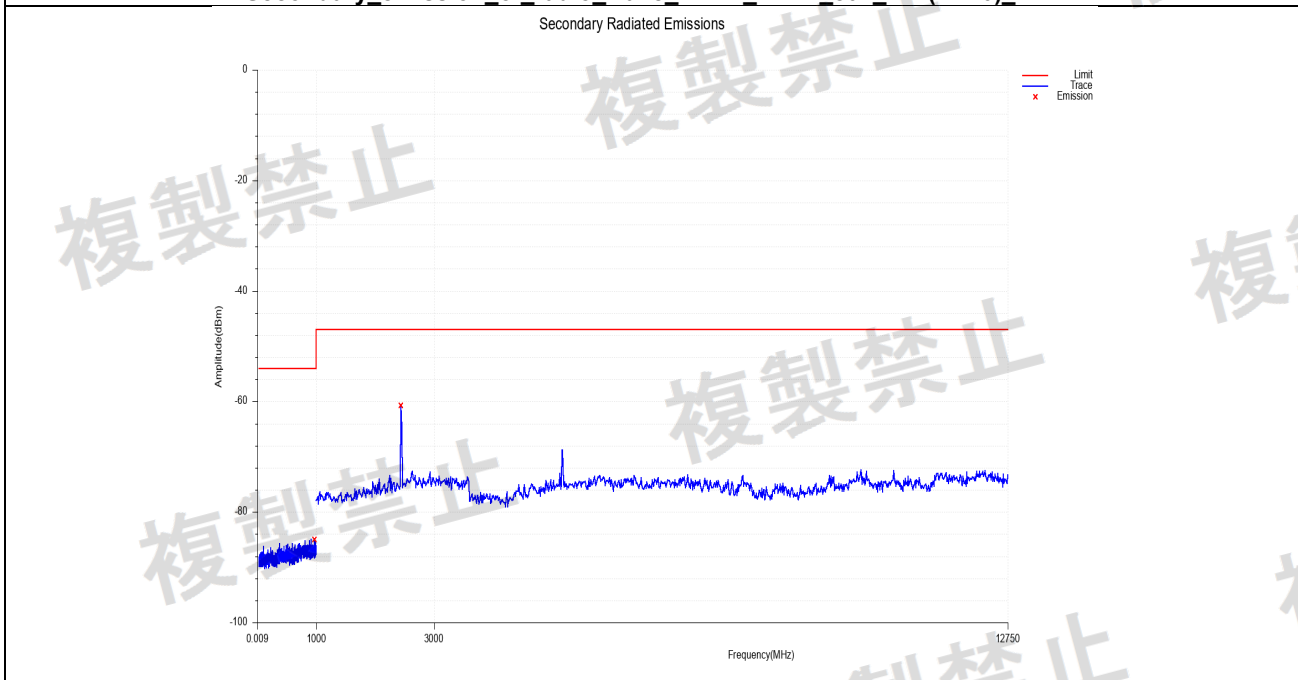
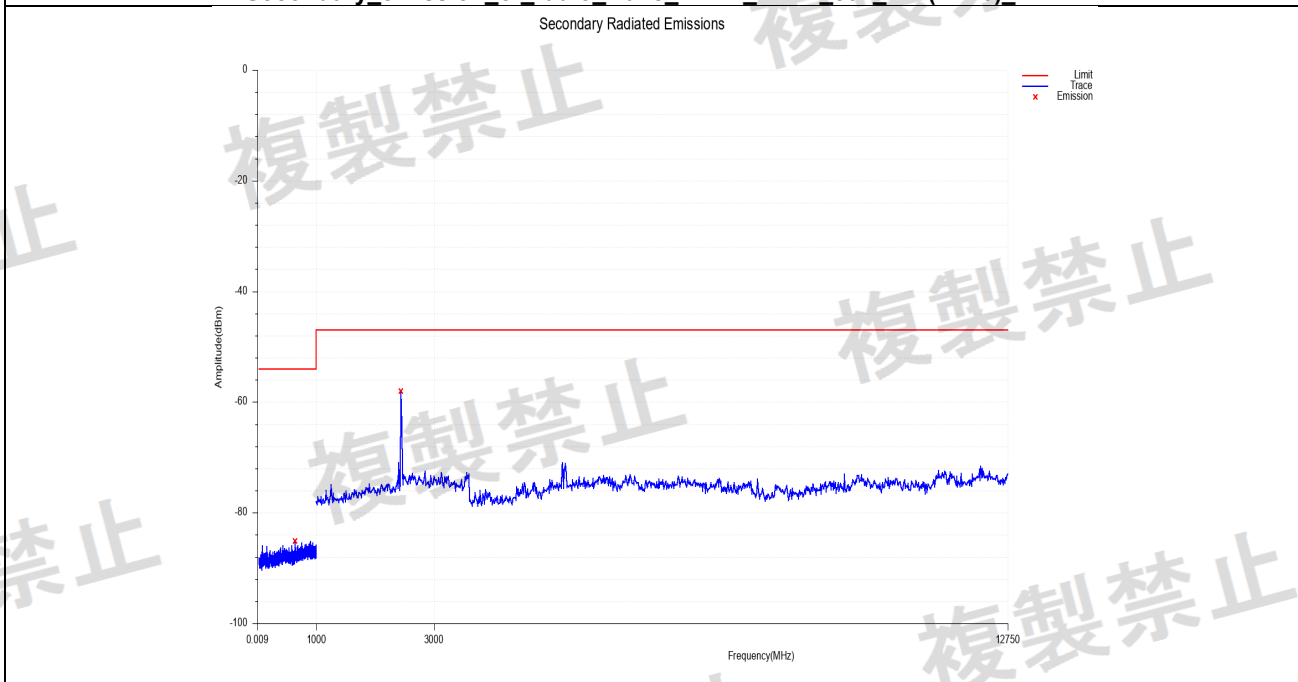
**Secondary emission of radio wave NVNT_ANT2_802_11a_HCH**

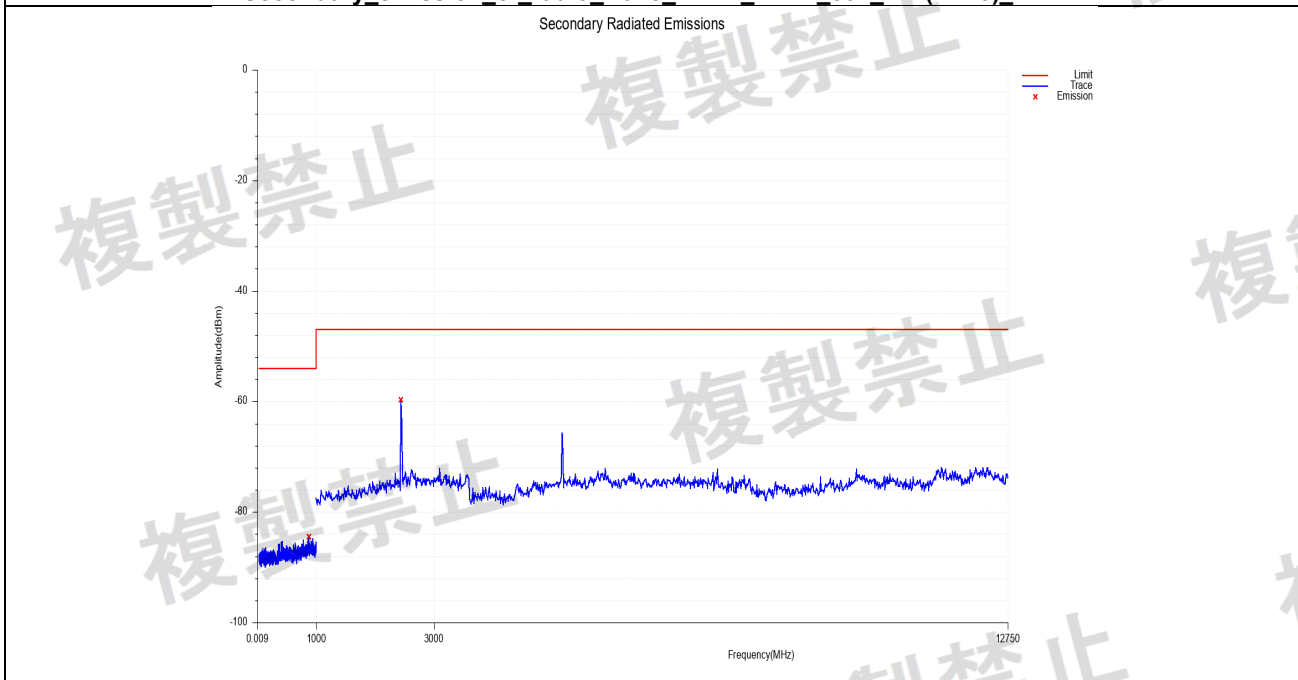
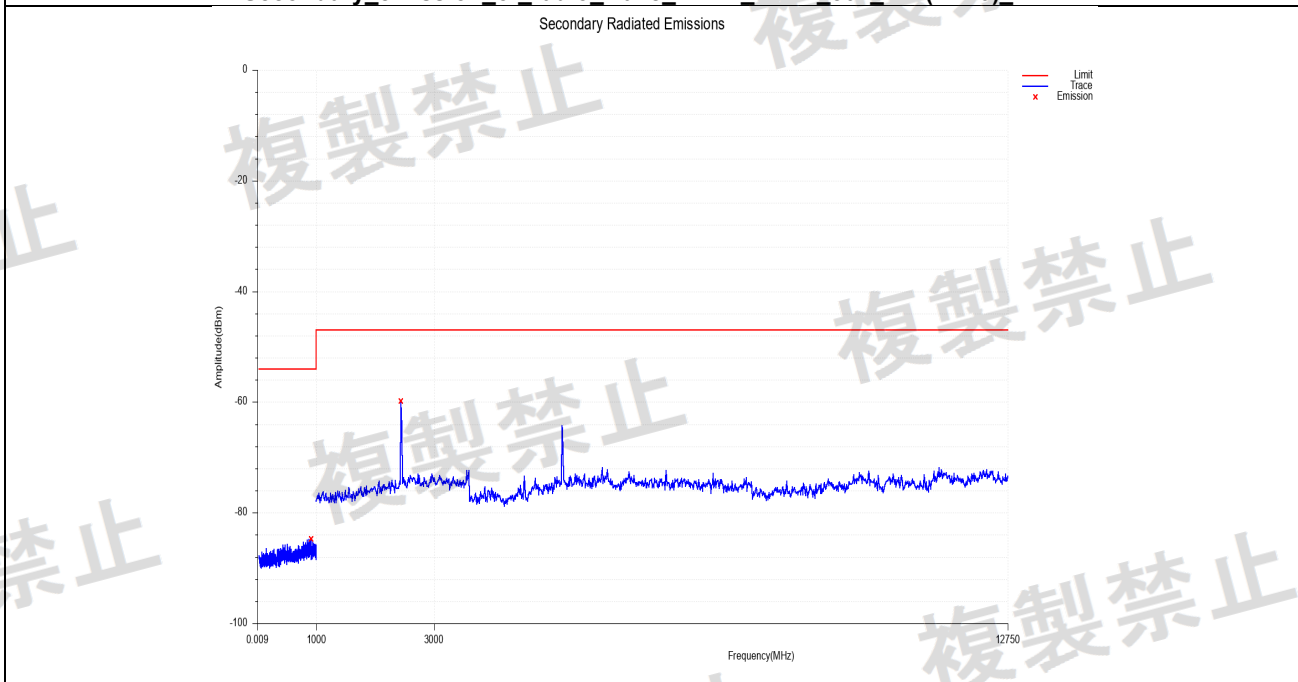
Secondary Radiated Emissions

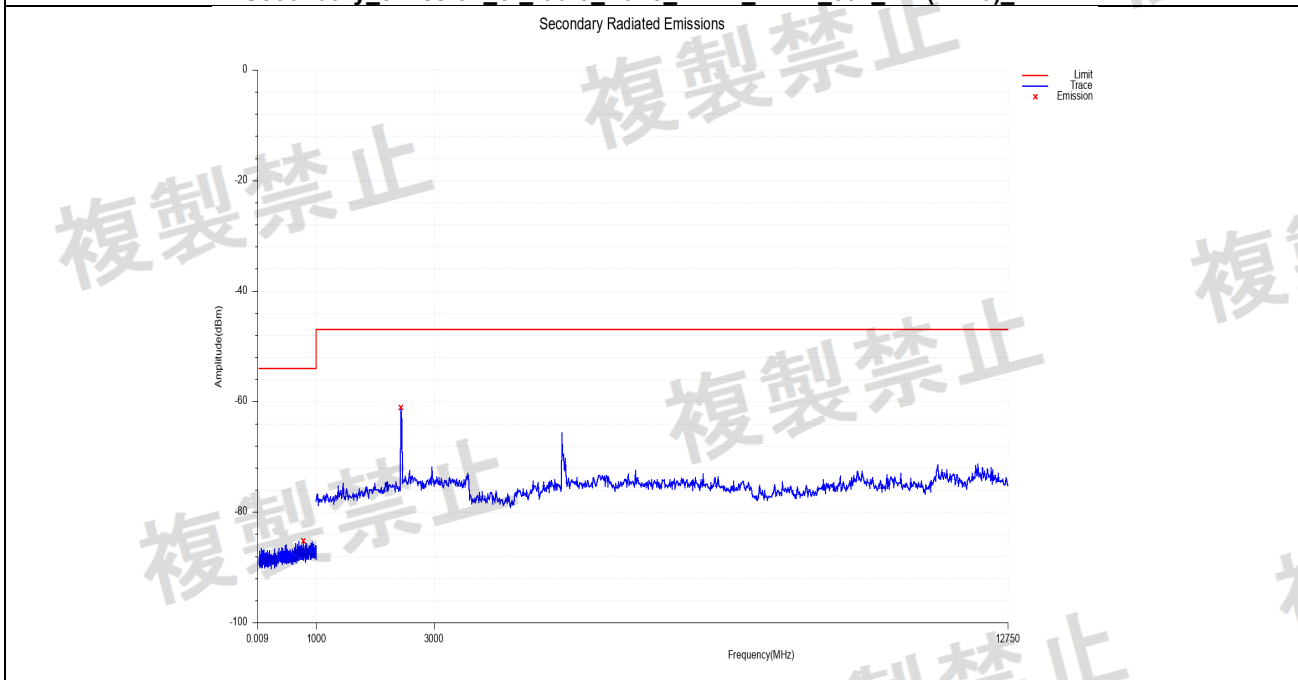
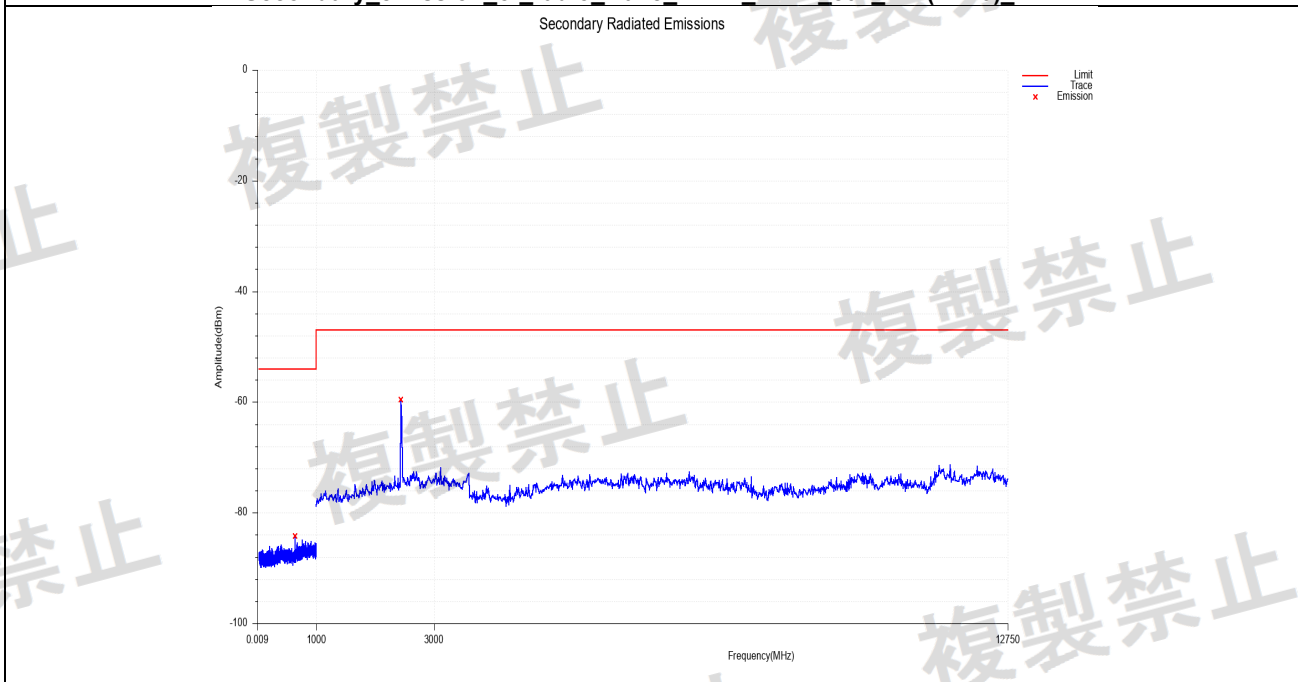
**Secondary emission of radio wave NVNT_ANT1_802_11a_HCH**

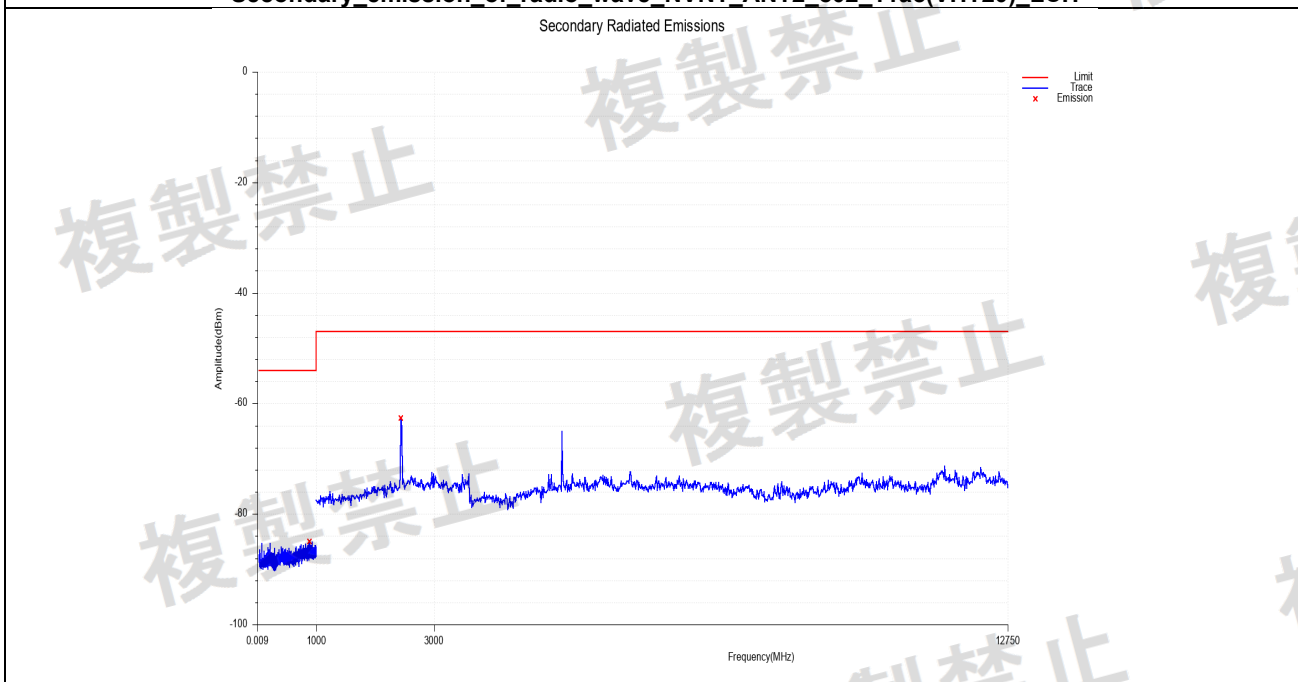
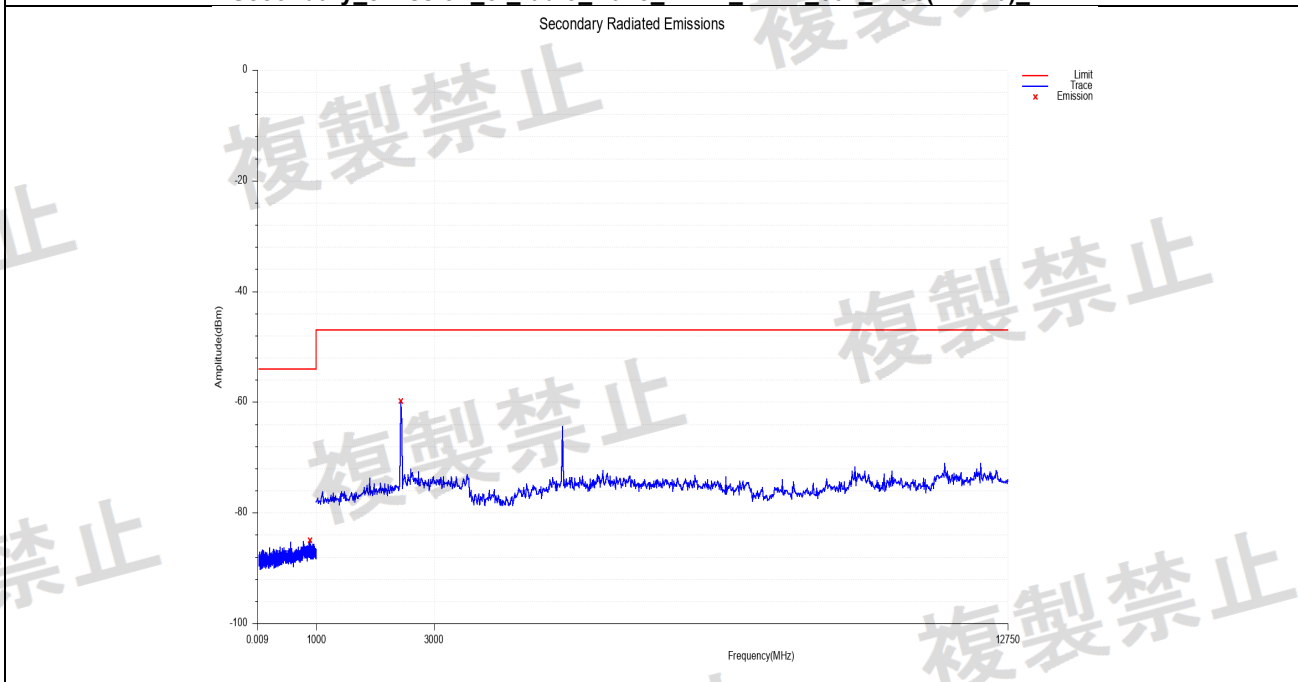
Secondary Radiated Emissions

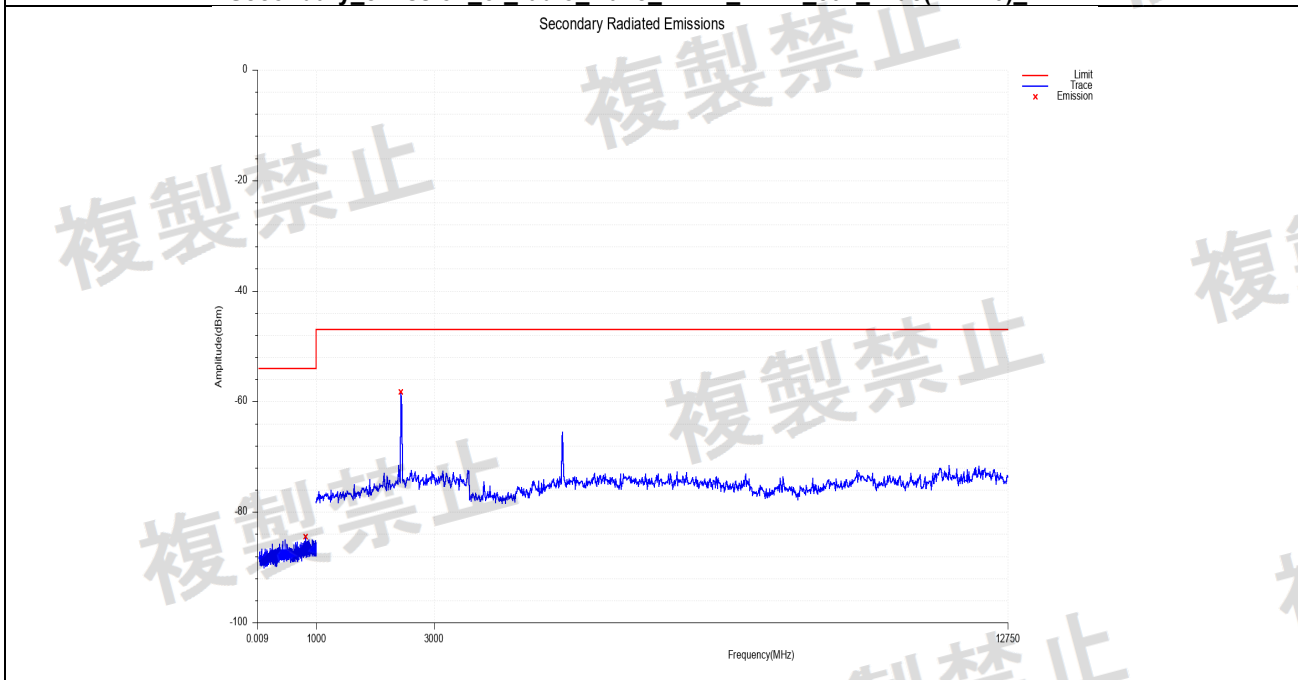
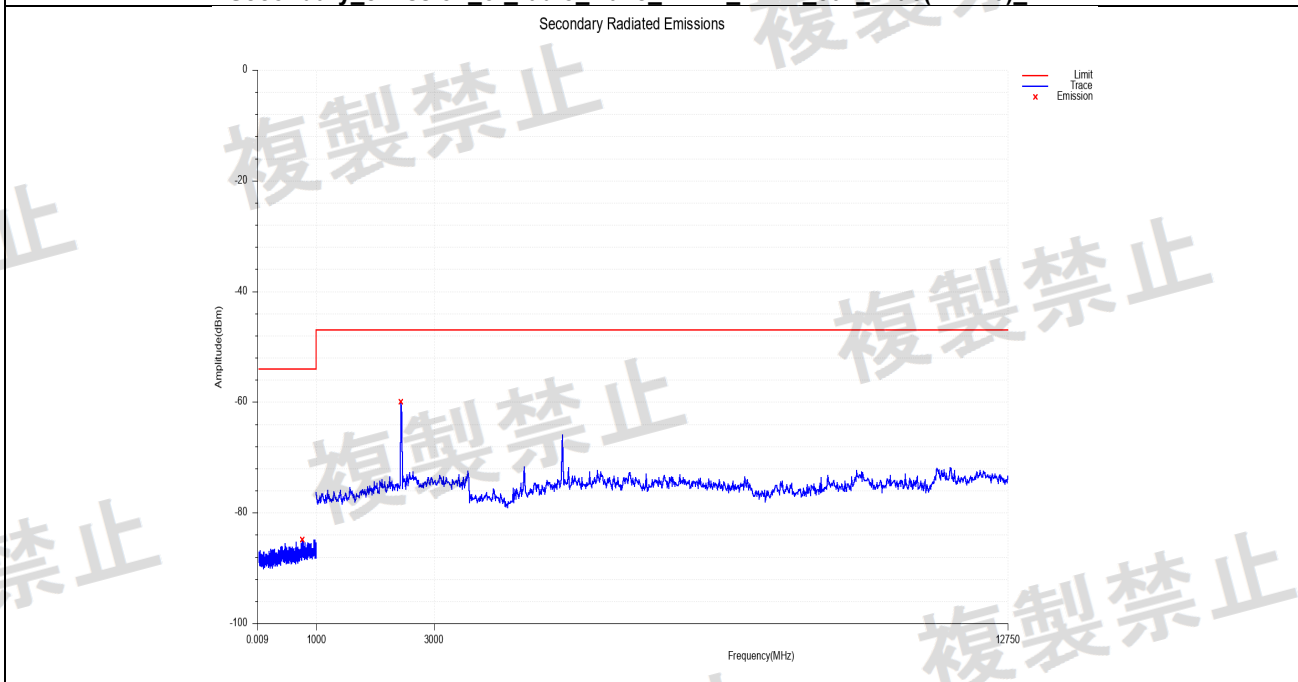


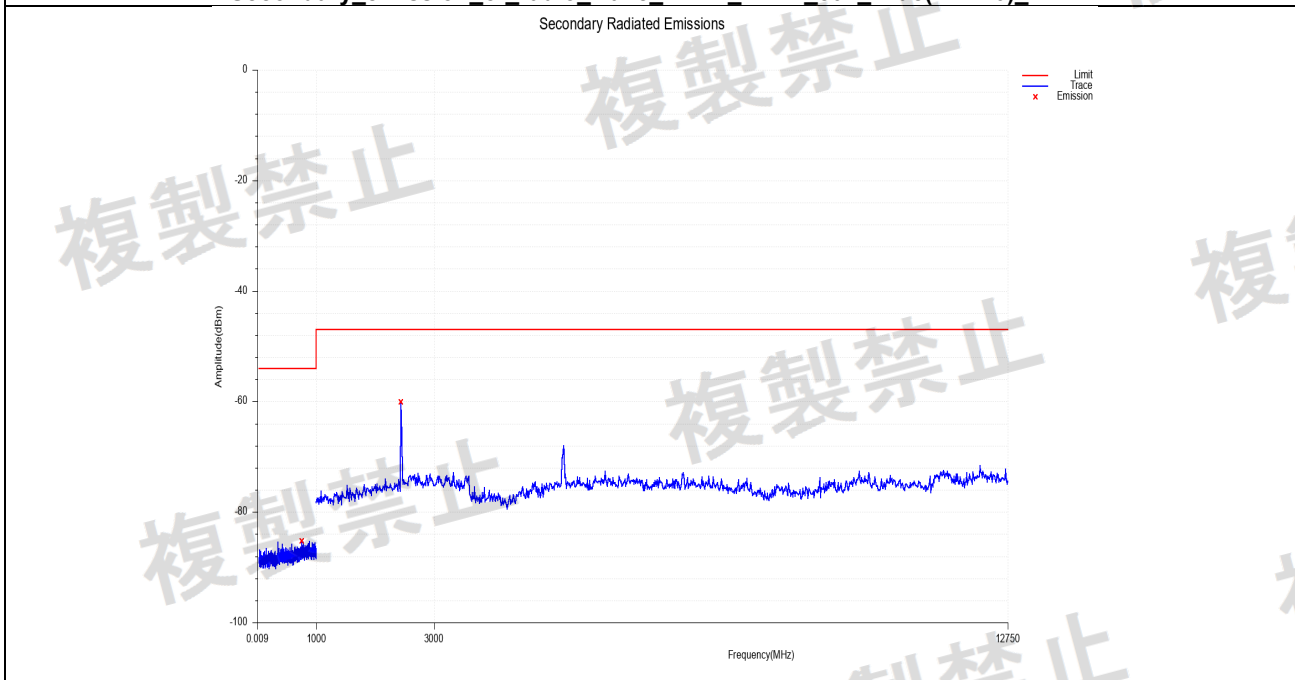
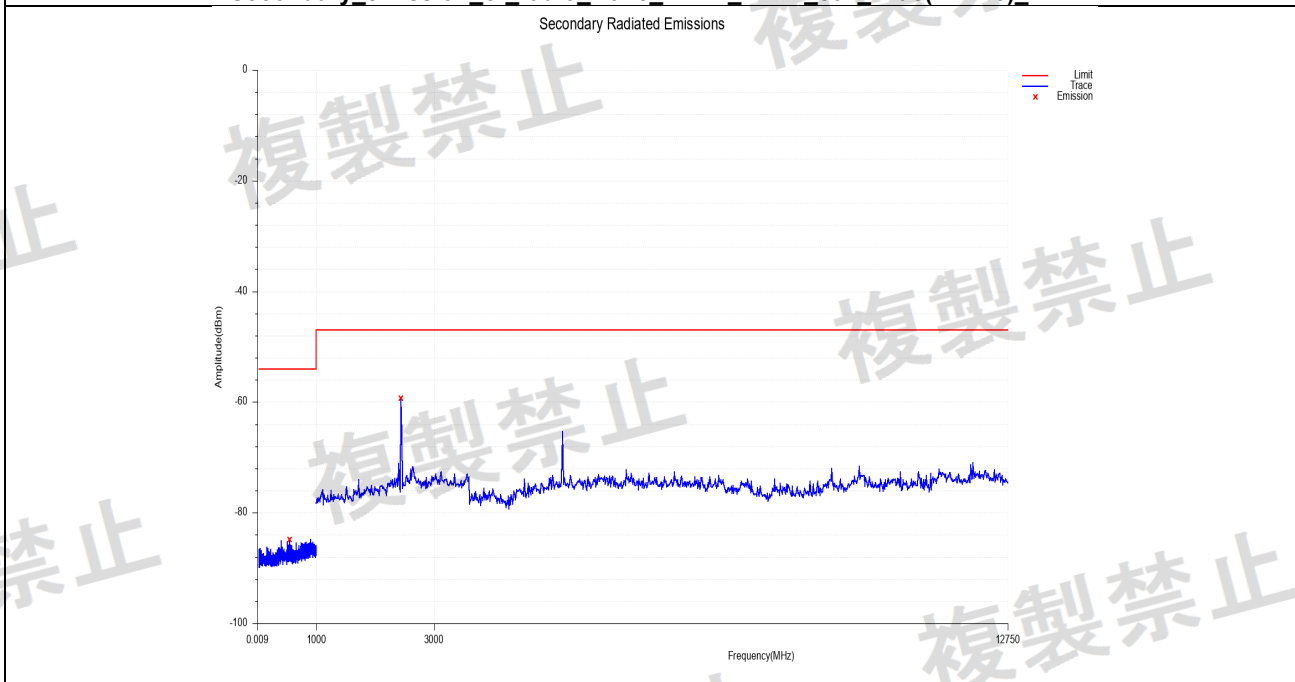
**Secondary emission of radio wave NVNT_ANT2_802_11n(HT20)_LCH****Secondary emission of radio wave NVNT_ANT1_802_11n(HT20)_LCH**

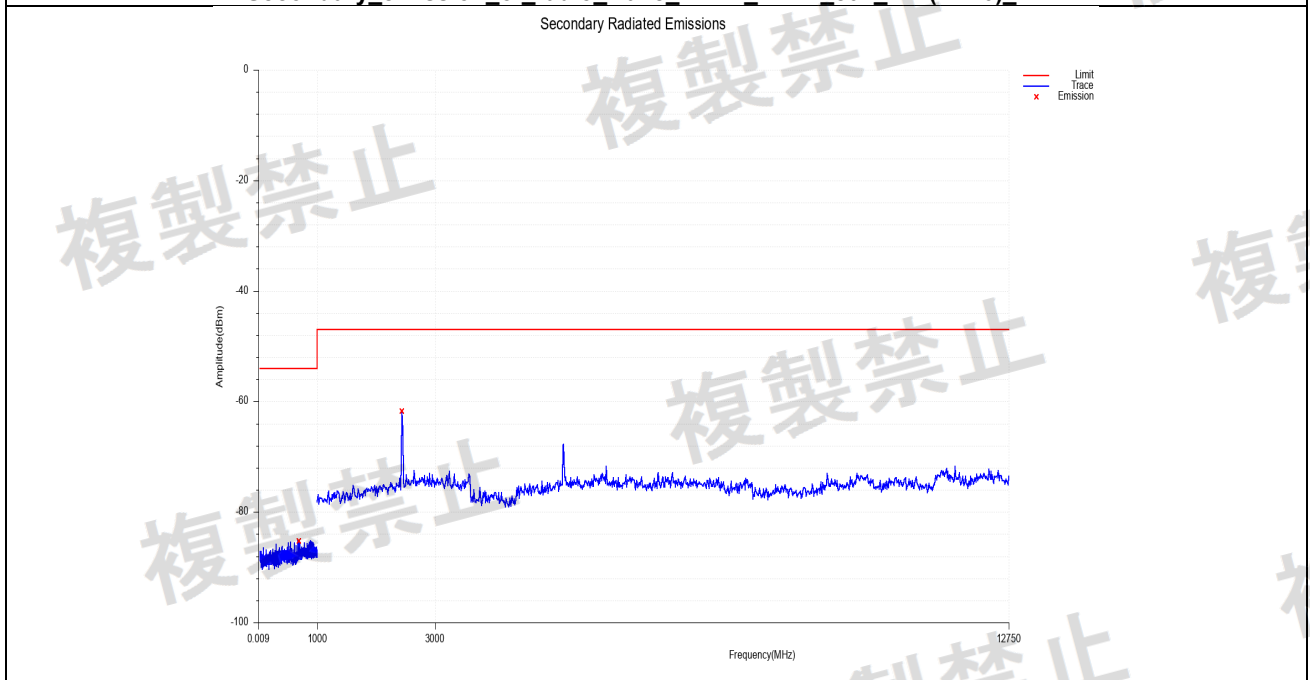
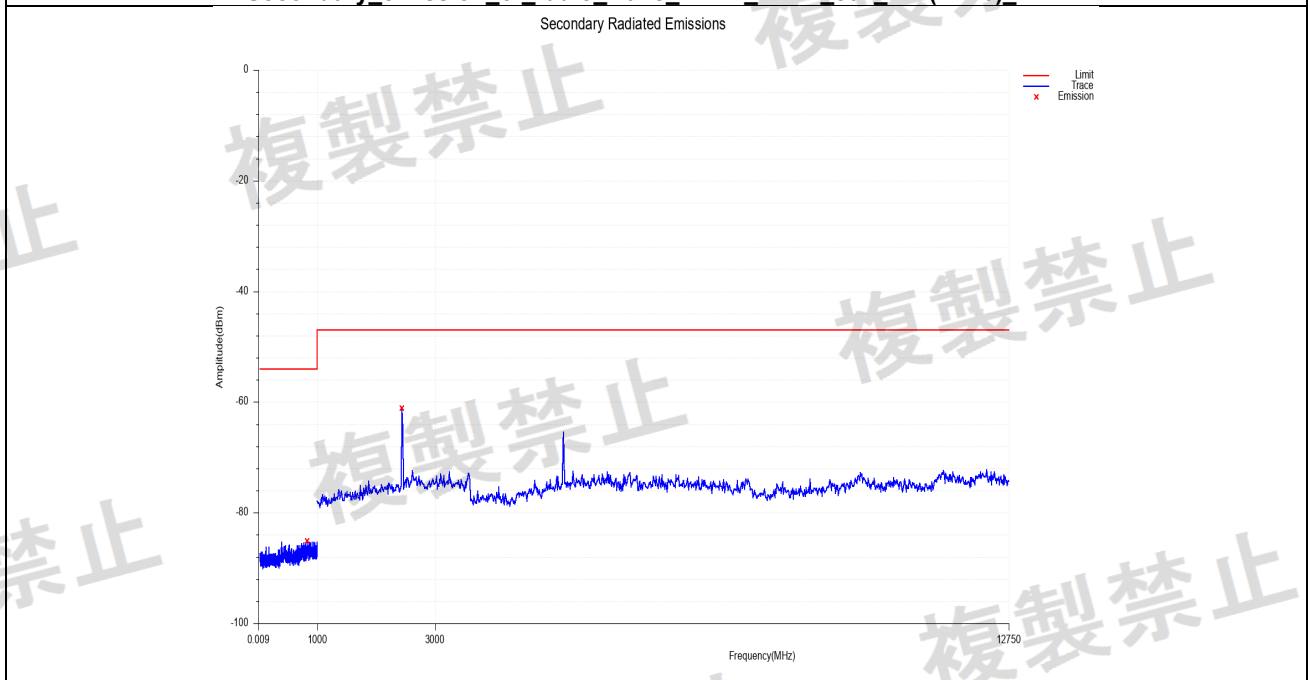
Secondary emission of radio wave NVNT_ANT2_802_11n(HT20)_MCH**Secondary emission of radio wave NVNT_ANT1_802_11n(HT20)_MCH**

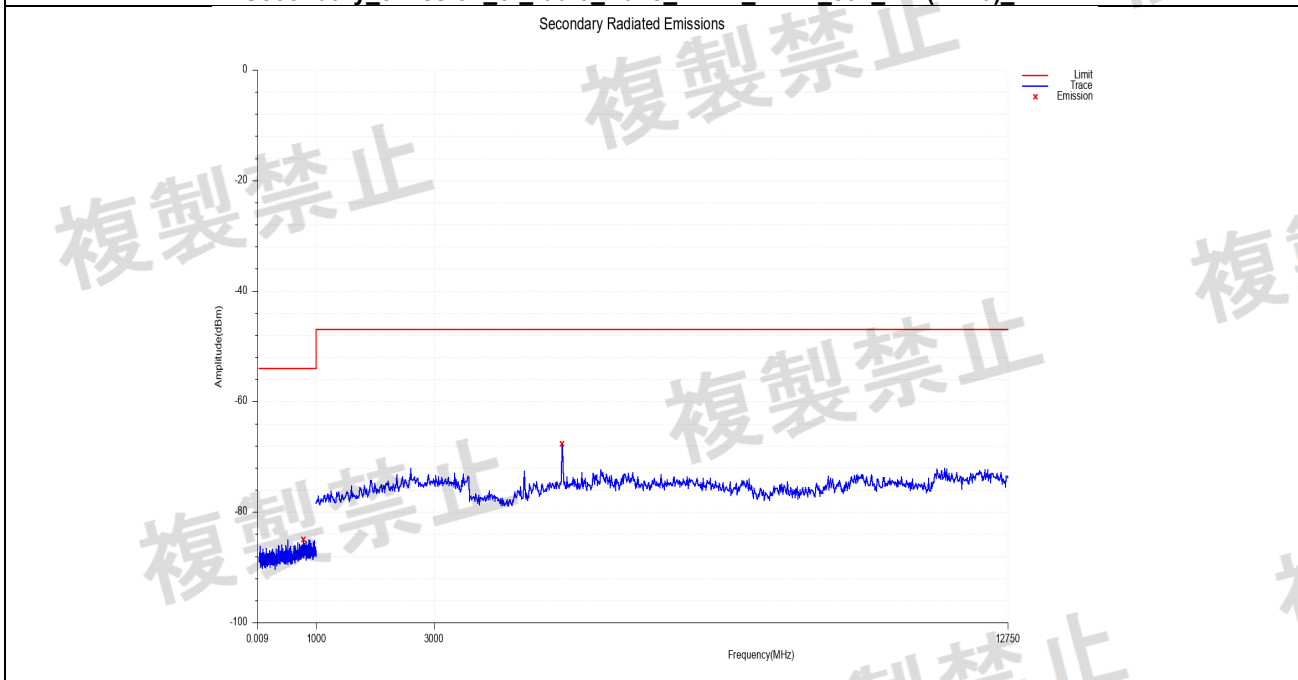
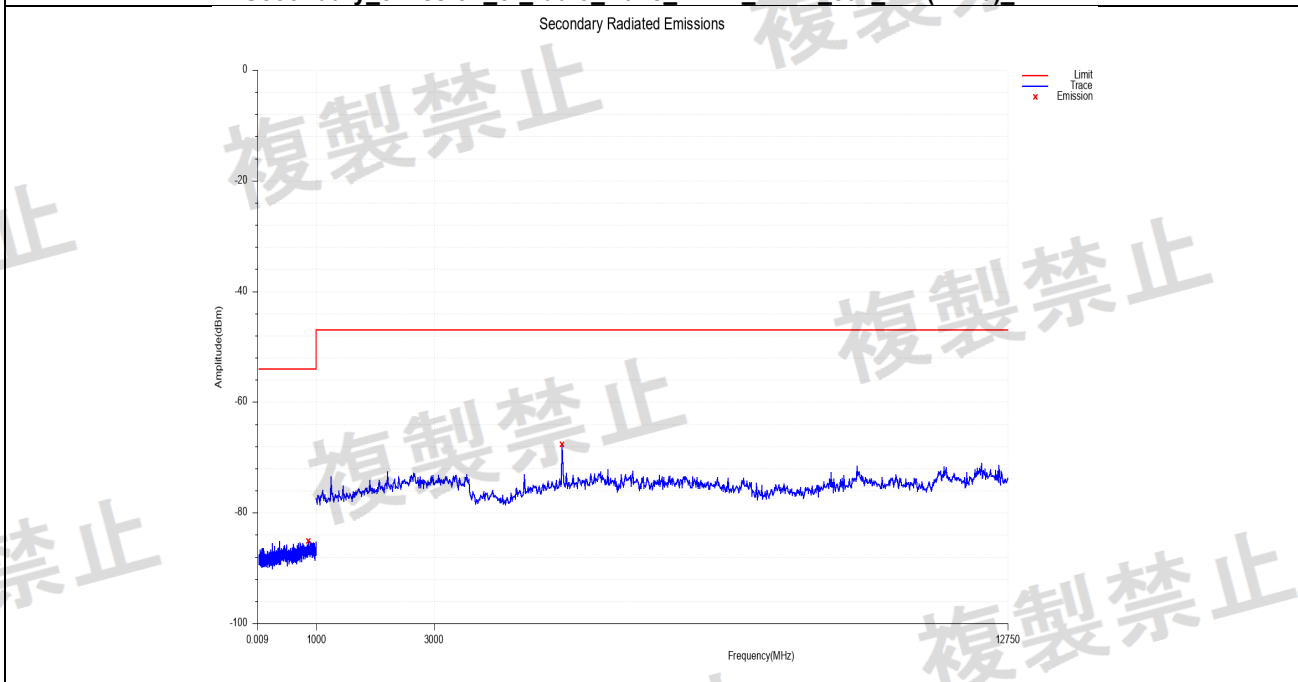
**Secondary emission of radio wave NVNT_ANT2_802_11n(HT20)_HCH****Secondary emission of radio wave NVNT_ANT1_802_11n(HT20)_HCH**

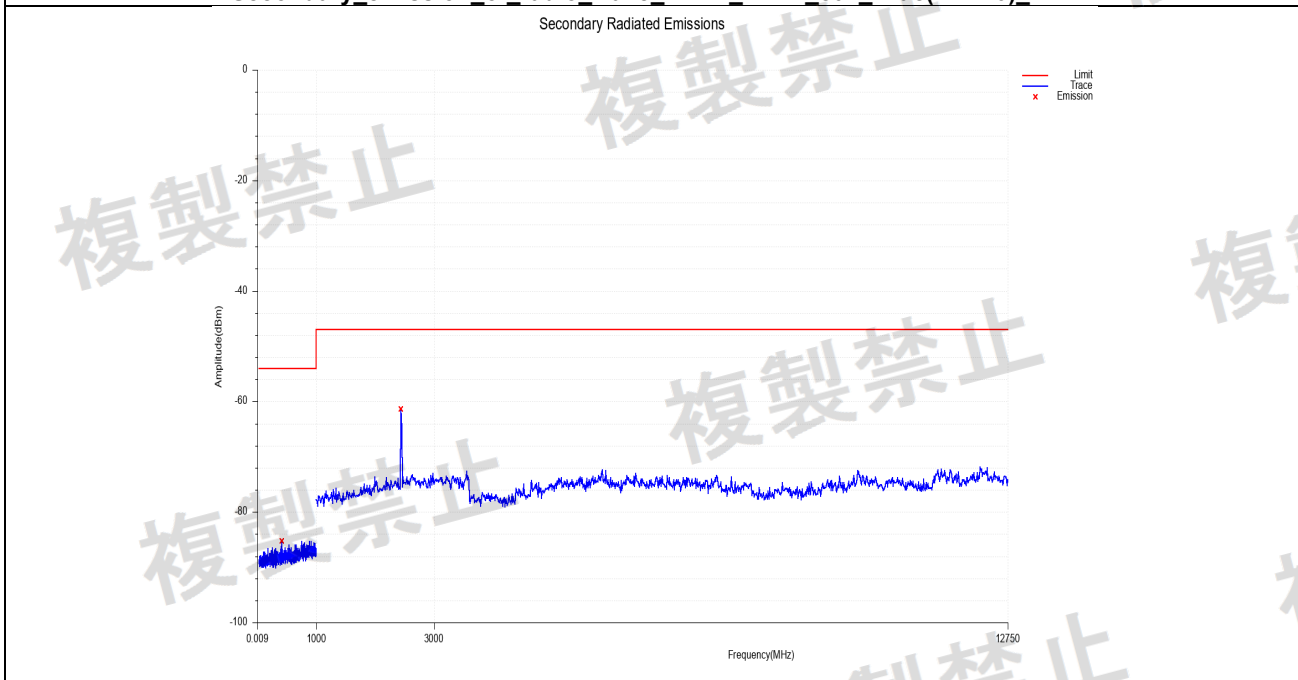
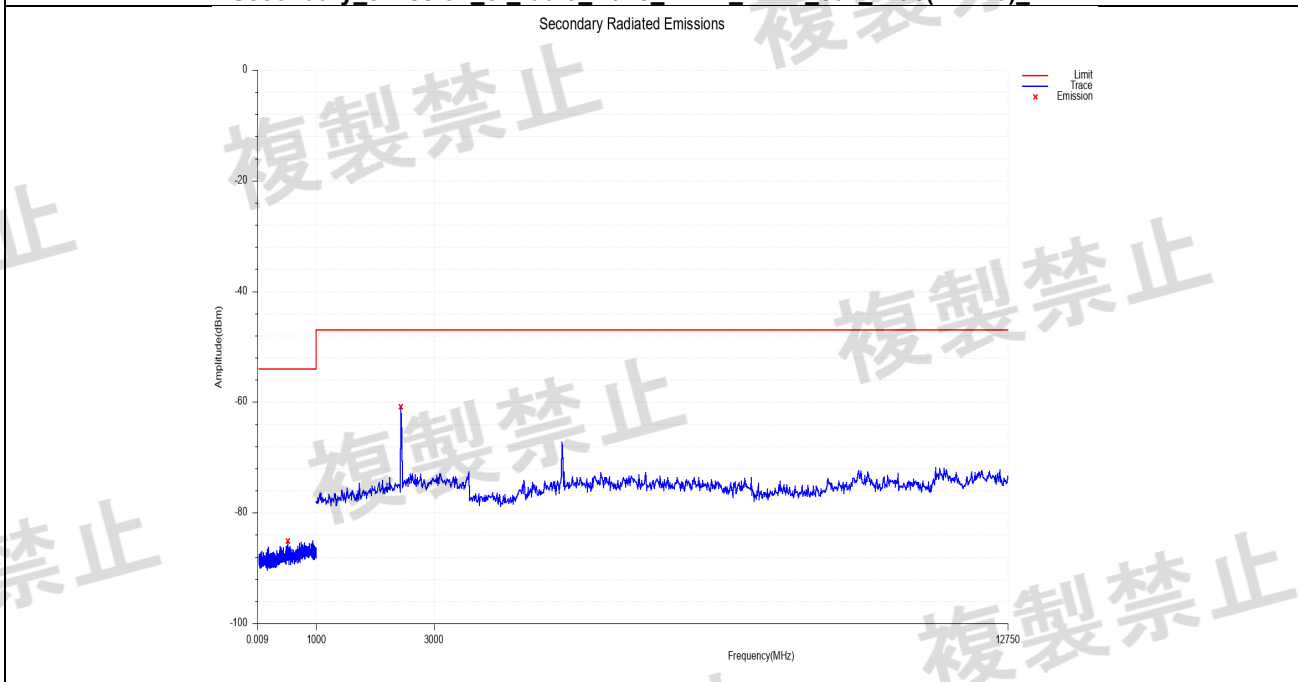
**Secondary emission of radio wave NVNT_ANT2_802_11ac(VHT20)_LCH****Secondary emission of radio wave NVNT_ANT1_802_11ac(VHT20)_LCH**

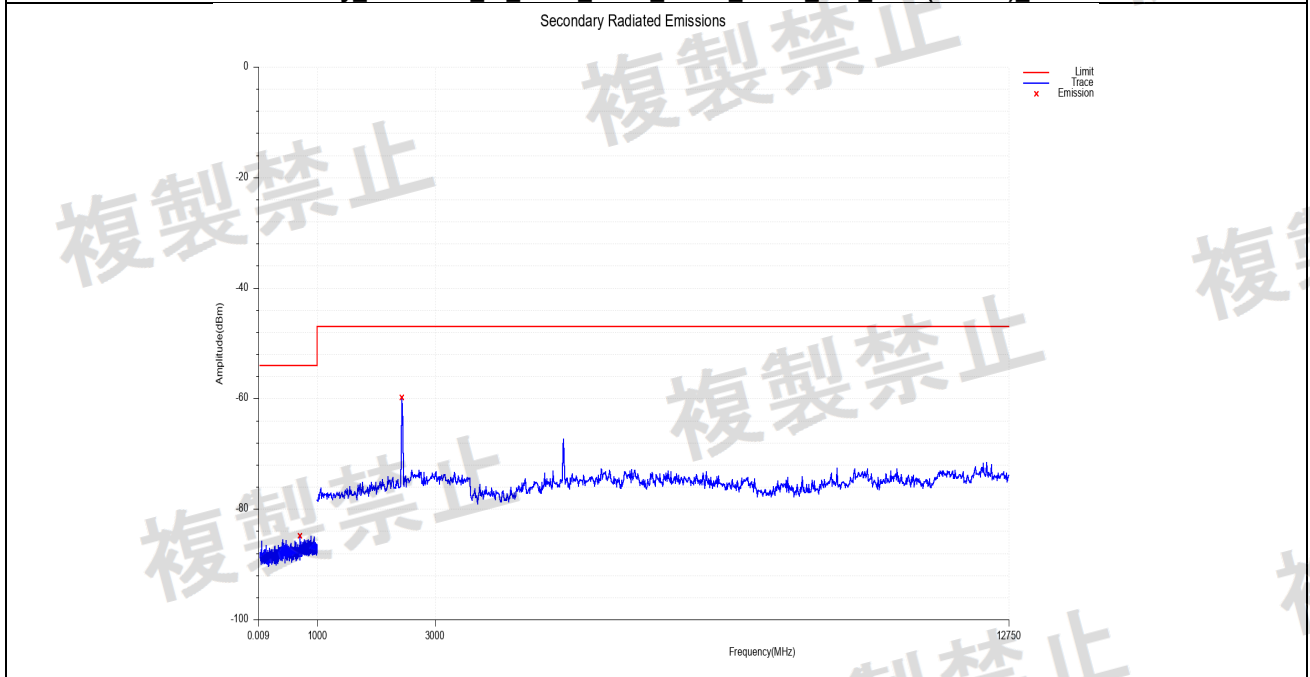
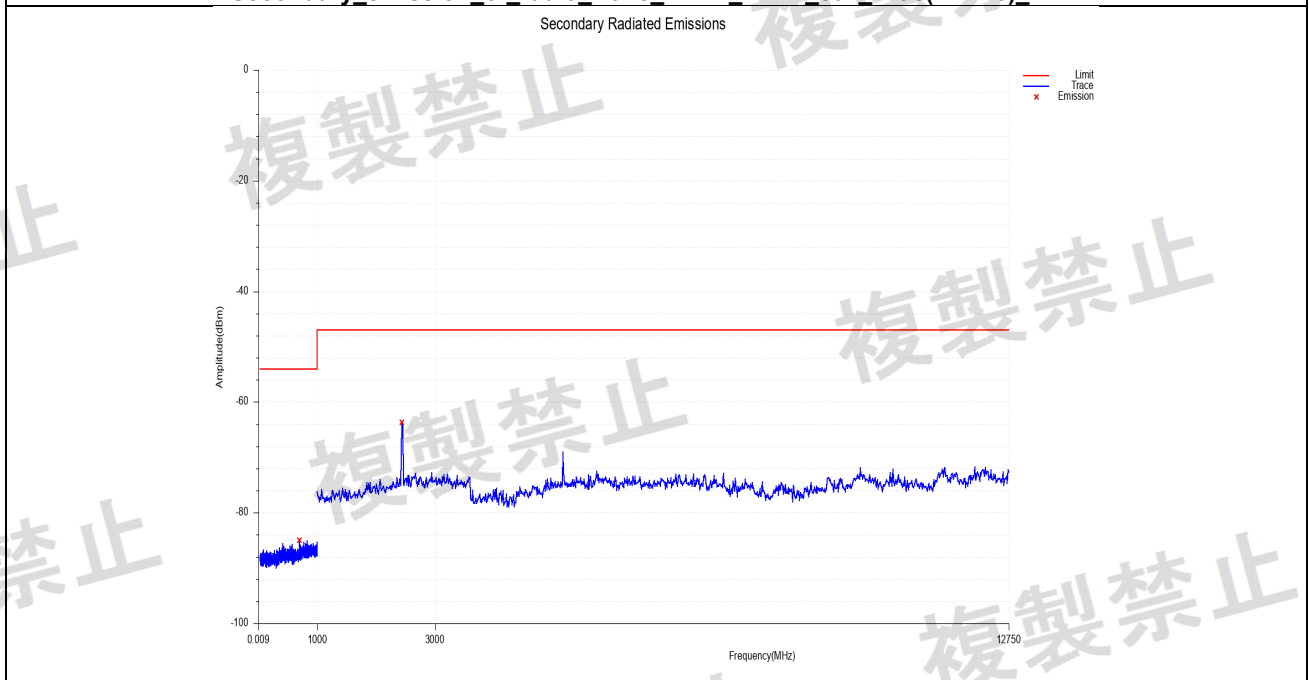
**Secondary emission of radio wave NVNT_ANT2_802_11ac(VHT20)_MCH****Secondary emission of radio wave NVNT_ANT1_802_11ac(VHT20)_MCH**

**Secondary emission of radio wave NVNT_ANT2_802_11ac(VHT20)_HCH****Secondary emission of radio wave NVNT_ANT1_802_11ac(VHT20)_HCH**

**Secondary emission of radio wave NVNT_ANT2_802_11n(HT40)_LCH****Secondary emission of radio wave NVNT_ANT1_802_11n(HT40)_LCH**

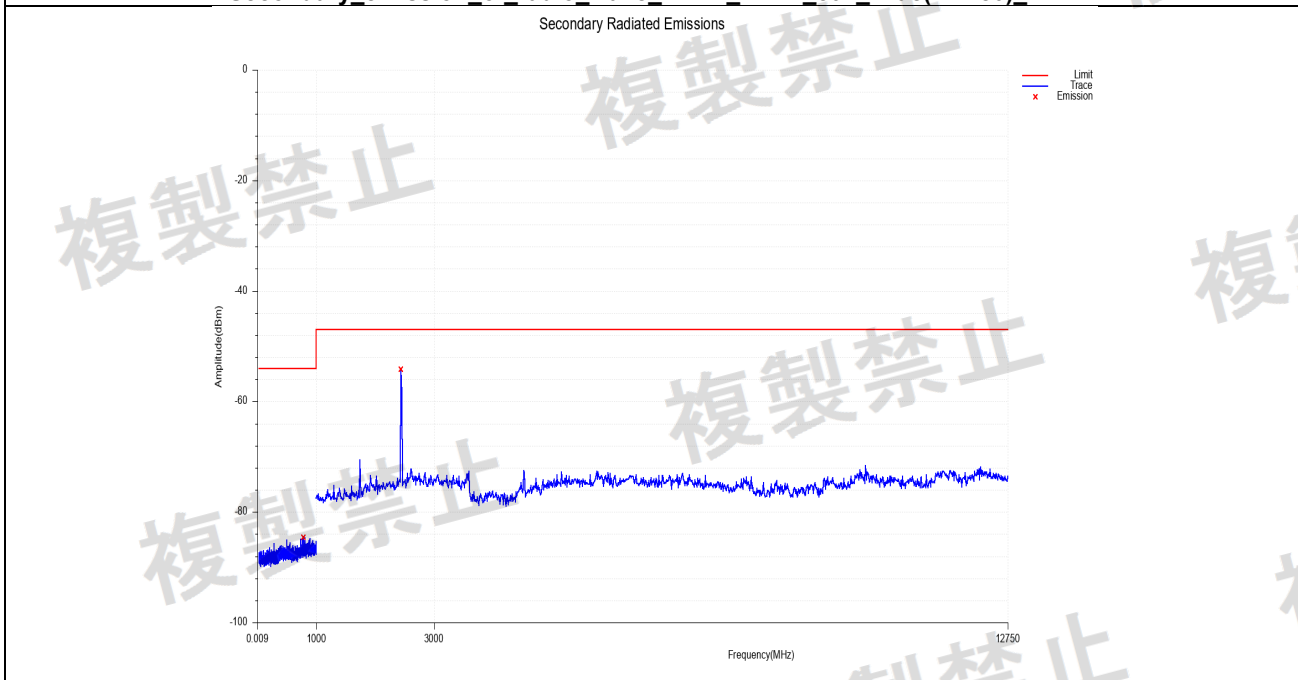
**Secondary emission of radio wave NVNT_ANT2_802_11n(HT40)_HCH****Secondary emission of radio wave NVNT_ANT1_802_11n(HT40)_HCH**

Secondary emission of radio wave NVNT_ANT2_802_11ac(VHT40)_LCH**Secondary emission of radio wave NVNT_ANT1_802_11ac(VHT40)_LCH**

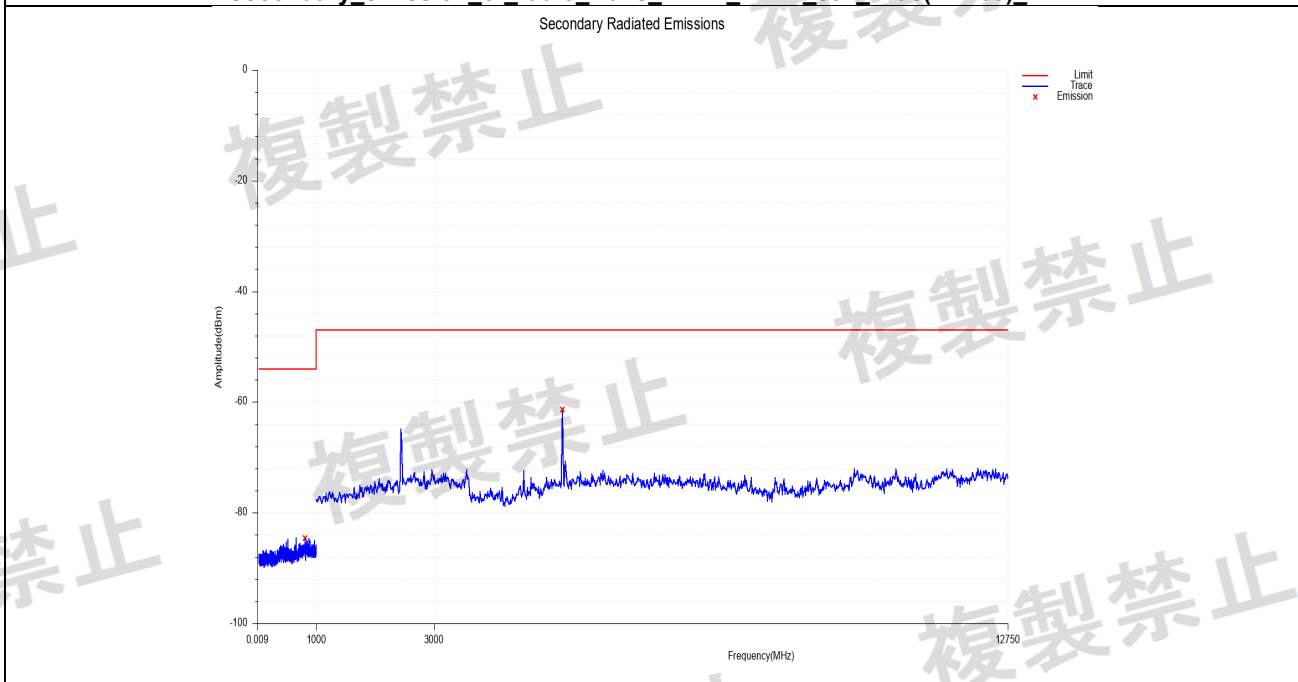
**Secondary emission of radio_wave_NVNT_ANT2_802_11ac(VHT40)_HCH****Secondary emission of radio_wave_NVNT_ANT1_802_11ac(VHT40)_HCH**



Secondary emission of radio wave NVNT_ANT2_802_11ac(VHT80)_MCH



Secondary emission of radio wave NVNT_ANT1_802_11ac(VHT80)_MCH



Appendix A.6: Test Results of Burst Length

Test Result

Condition	Antenna	Mode	Frequency	Burst_Length (ms)	Limit (ms)	Result
NVNT	ANT1	802.11a	5180.00	2.060	8	Pass
NVNT	ANT2	802.11a	5180.00	2.060	8	Pass
NVNT	ANT1	802.11a	5200.00	2.070	8	Pass
NVNT	ANT2	802.11a	5200.00	2.070	8	Pass
NVNT	ANT1	802.11a	5240.00	2.060	8	Pass
NVNT	ANT2	802.11a	5240.00	2.070	8	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	1.920	8	Pass
NVNT	ANT2	802.11n(HT20)	5180.00	1.930	8	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	1.920	8	Pass
NVNT	ANT2	802.11n(HT20)	5200.00	1.920	8	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	1.920	8	Pass
NVNT	ANT2	802.11n(HT20)	5240.00	1.920	8	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	1.920	8	Pass
NVNT	ANT2	802.11ac(VHT20)	5180.00	1.920	8	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	1.930	8	Pass
NVNT	ANT2	802.11ac(VHT20)	5200.00	1.920	8	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	1.920	8	Pass
NVNT	ANT2	802.11ac(VHT20)	5240.00	1.710	8	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	0.940	8	Pass
NVNT	ANT2	802.11n(HT40)	5190.00	0.940	8	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	0.940	8	Pass
NVNT	ANT2	802.11n(HT40)	5230.00	0.950	8	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	0.940	8	Pass
NVNT	ANT2	802.11ac(VHT40)	5190.00	0.950	8	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	0.940	8	Pass
NVNT	ANT2	802.11ac(VHT40)	5230.00	0.950	8	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	0.460	8	Pass
NVNT	ANT2	802.11ac(VHT80)	5210.00	0.460	8	Pass

Appendix A.7: Test Results of Adjacent Channel Power

Test Result

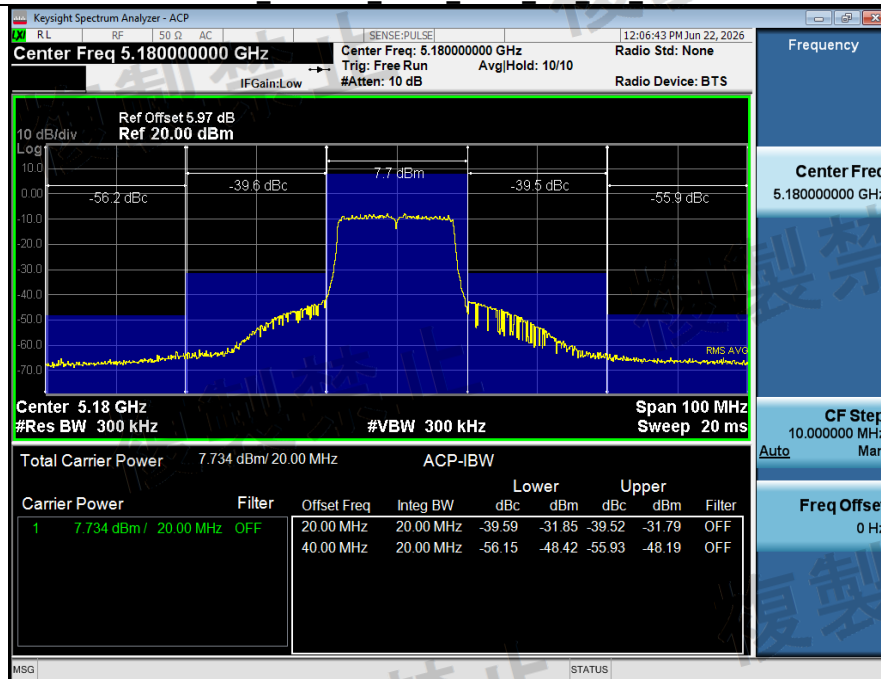
Condition	Antenna	Mode	Frequency (MHz)	Frequency Offset (MHz)	Lower Level (dBc)	Upper Level (dBc)	Limit (dBc)	Result
NVNT	ANT1	802.11a	5180.00	20MHz	-36.47	-34.51	-25	Pass
NVNT	ANT1	802.11a	5180.00	40MHz	-55.27	-51.11	-40	Pass
NVNT	ANT2	802.11a	5180.00	20MHz	-39.59	-39.52	-25	Pass
NVNT	ANT2	802.11a	5180.00	40MHz	-56.15	-55.93	-40	Pass
NVNT	ANT1	802.11a	5200.00	20MHz	-40.71	-38.38	-25	Pass
NVNT	ANT1	802.11a	5200.00	40MHz	-57.71	-55.33	-40	Pass
NVNT	ANT2	802.11a	5200.00	20MHz	-42.99	-46.65	-25	Pass
NVNT	ANT2	802.11a	5200.00	40MHz	-56.09	-55.63	-40	Pass
NVNT	ANT1	802.11a	5240.00	20MHz	-44.49	-44.83	-25	Pass
NVNT	ANT1	802.11a	5240.00	40MHz	-58.01	-56.18	-40	Pass
NVNT	ANT2	802.11a	5240.00	20MHz	-43.72	-43.07	-25	Pass
NVNT	ANT2	802.11a	5240.00	40MHz	-57.14	-56.48	-40	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	20MHz	-41.61	-44.22	-25	Pass
NVNT	ANT1	802.11n(HT20)	5180.00	40MHz	-58.36	-56.23	-40	Pass
NVNT	ANT2	802.11n(HT20)	5180.00	20MHz	-41.17	-44.17	-25	Pass
NVNT	ANT2	802.11n(HT20)	5180.00	40MHz	-57.45	-56.92	-40	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	20MHz	-42.09	-43.72	-25	Pass
NVNT	ANT1	802.11n(HT20)	5200.00	40MHz	-57.52	-55.55	-40	Pass
NVNT	ANT2	802.11n(HT20)	5200.00	20MHz	-41.57	-44.57	-25	Pass
NVNT	ANT2	802.11n(HT20)	5200.00	40MHz	-56.92	-56.51	-40	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	20MHz	-39.89	-37.69	-25	Pass
NVNT	ANT1	802.11n(HT20)	5240.00	40MHz	-58.16	-56.40	-40	Pass
NVNT	ANT2	802.11n(HT20)	5240.00	20MHz	-38.65	-36.25	-25	Pass
NVNT	ANT2	802.11n(HT20)	5240.00	40MHz	-57.01	-56.23	-40	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	20MHz	-42.89	-45.44	-25	Pass
NVNT	ANT1	802.11ac(VHT20)	5180.00	40MHz	-58.09	-56.17	-40	Pass
NVNT	ANT2	802.11ac(VHT20)	5180.00	20MHz	-42.47	-45.06	-25	Pass
NVNT	ANT2	802.11ac(VHT20)	5180.00	40MHz	-57.25	-56.59	-40	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	20MHz	-43.36	-44.83	-25	Pass
NVNT	ANT1	802.11ac(VHT20)	5200.00	40MHz	-57.08	-55.32	-40	Pass
NVNT	ANT2	802.11ac(VHT20)	5200.00	20MHz	-42.48	-44.94	-25	Pass
NVNT	ANT2	802.11ac(VHT20)	5200.00	40MHz	-56.48	-55.95	-40	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	20MHz	-43.62	-45.88	-25	Pass
NVNT	ANT1	802.11ac(VHT20)	5240.00	40MHz	-56.36	-56.19	-40	Pass
NVNT	ANT2	802.11ac(VHT20)	5240.00	20MHz	-43.25	-45.48	-25	Pass
NVNT	ANT2	802.11ac(VHT20)	5240.00	40MHz	-56.73	-56.58	-40	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	40MHz	-39.81	-39.86	-25	Pass
NVNT	ANT1	802.11n(HT40)	5190.00	80MHz	-53.68	-50.33	-40	Pass
NVNT	ANT2	802.11n(HT40)	5190.00	40MHz	-39.33	-40.44	-25	Pass
NVNT	ANT2	802.11n(HT40)	5190.00	80MHz	-53.49	-52.85	-40	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	40MHz	-39.87	-41.34	-25	Pass
NVNT	ANT1	802.11n(HT40)	5230.00	80MHz	-54.74	-51.45	-40	Pass
NVNT	ANT2	802.11n(HT40)	5230.00	40MHz	-39.32	-41.42	-25	Pass
NVNT	ANT2	802.11n(HT40)	5230.00	80MHz	-53.91	-53.22	-40	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	40MHz	-39.74	-40.32	-25	Pass
NVNT	ANT1	802.11ac(VHT40)	5190.00	80MHz	-53.71	-50.30	-40	Pass
NVNT	ANT2	802.11ac(VHT40)	5190.00	40MHz	-39.29	-40.92	-25	Pass
NVNT	ANT2	802.11ac(VHT40)	5190.00	80MHz	-53.55	-52.88	-40	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	40MHz	-39.96	-41.55	-25	Pass
NVNT	ANT1	802.11ac(VHT40)	5230.00	80MHz	-55.06	-51.76	-40	Pass
NVNT	ANT2	802.11ac(VHT40)	5230.00	40MHz	-39.59	-41.48	-25	Pass
NVNT	ANT2	802.11ac(VHT40)	5230.00	80MHz	-53.95	-53.51	-40	Pass
NVNT	ANT1	802.11ac(VHT80)	5210.00	80MHz	-42.42	-41.91	-25	Pass
NVNT	ANT2	802.11ac(VHT80)	5210.00	80MHz	-41.62	-42.82	-25	Pass

Test Graphs

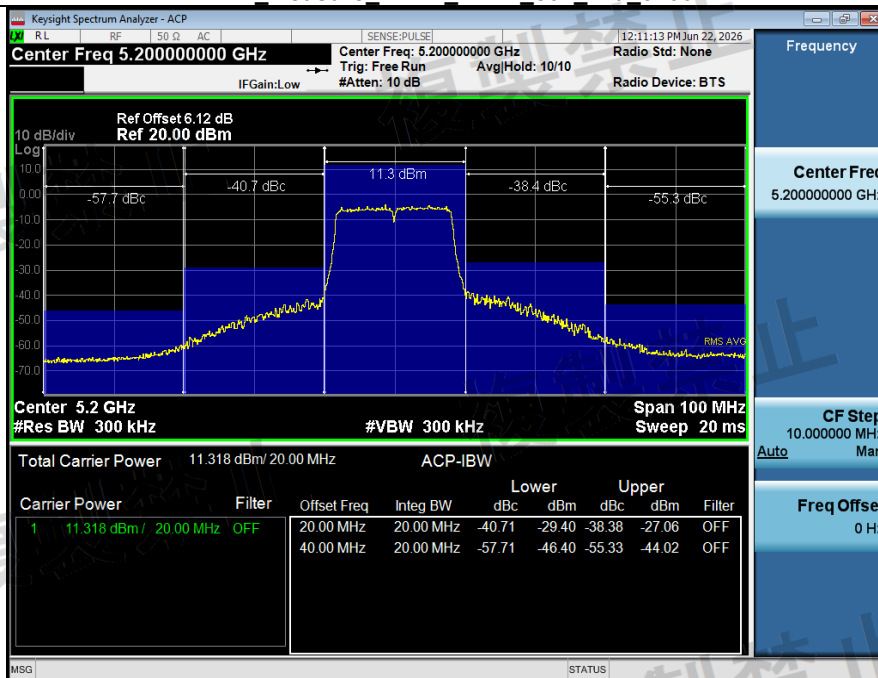
ACP Measure NVNT ANT1 802 11a 5180



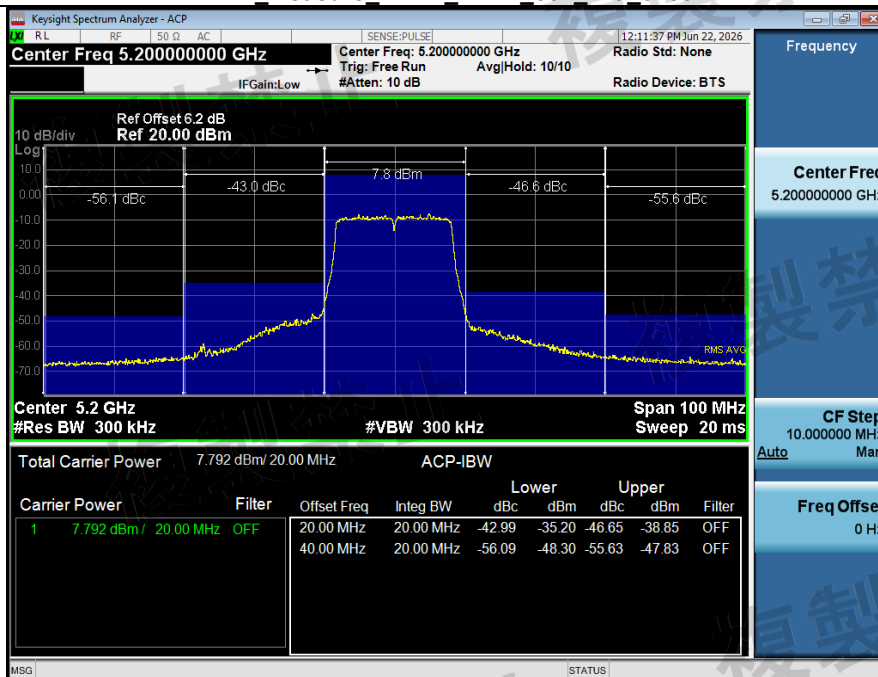
ACP Measure NVNT ANT2 802 11a 5180



ACP Measure NVNT ANT1 802 11a 5200

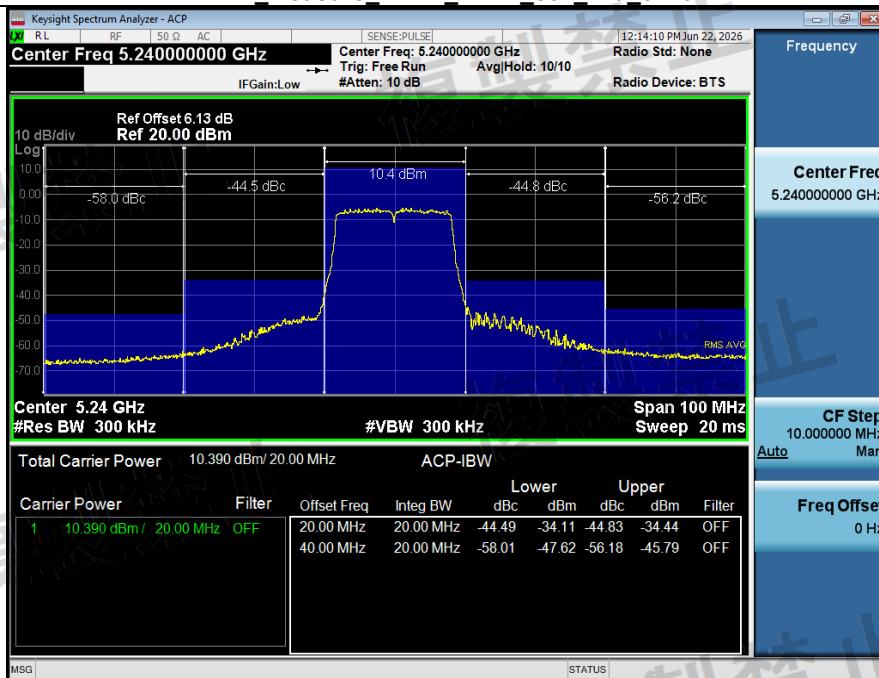


ACP Measure NVNT ANT2 802 11a 5200

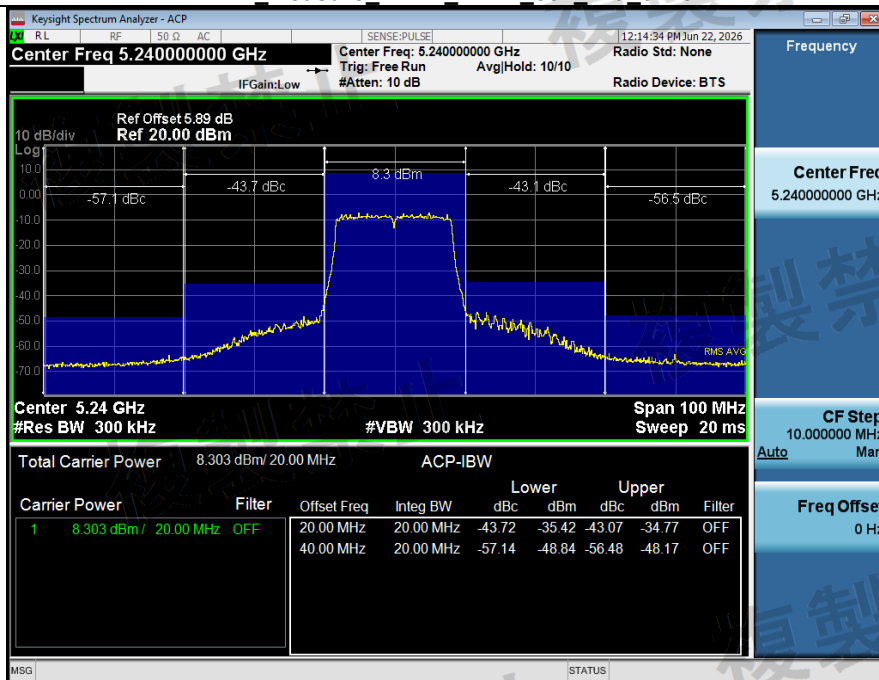




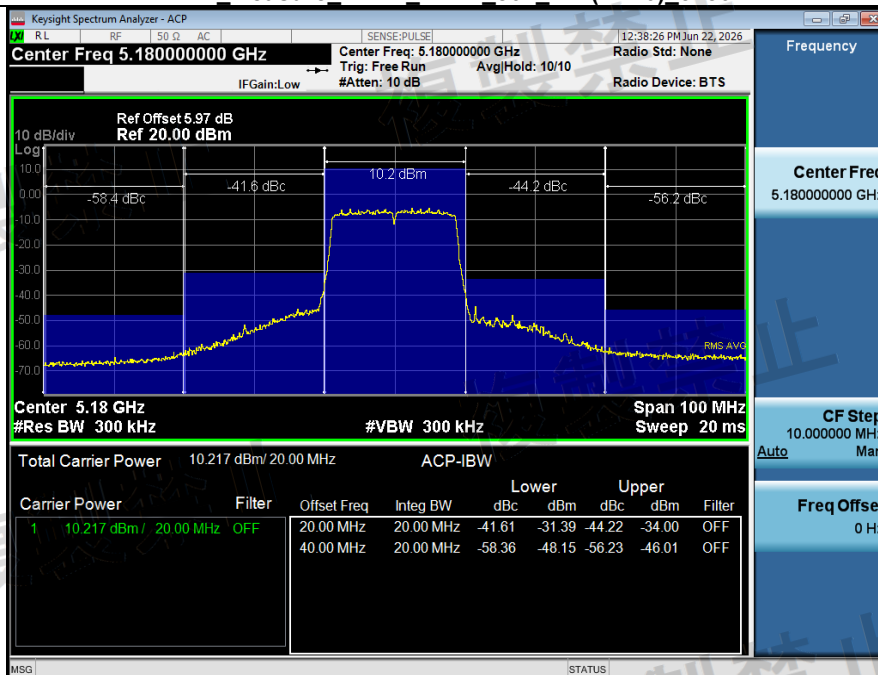
ACP Measure NVNT ANT1 802 11a 5240



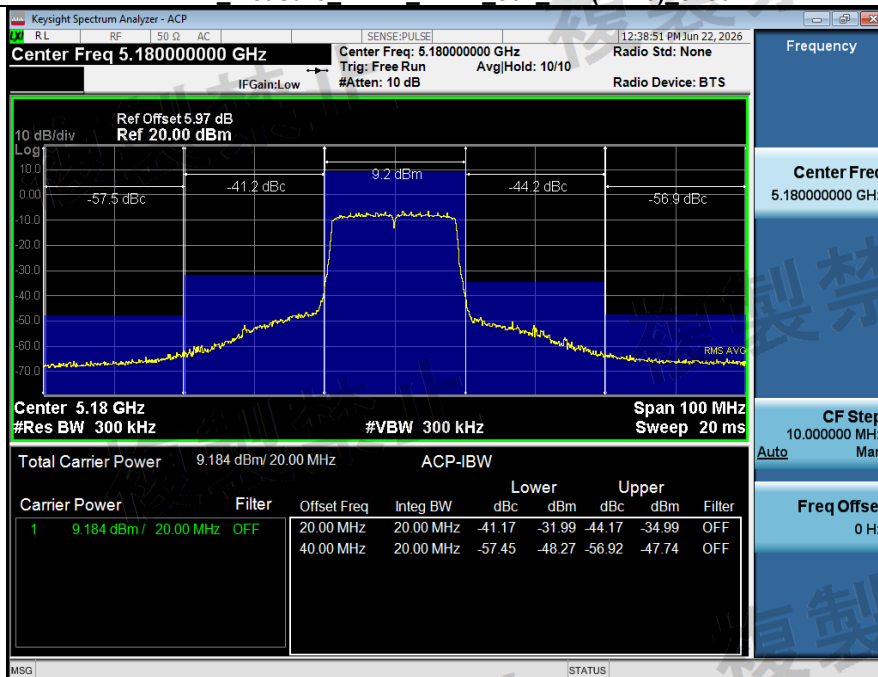
ACP Measure NVNT ANT2 802 11a 5240



ACP Measure NVNT ANT1 802 11n(HT20) 5180

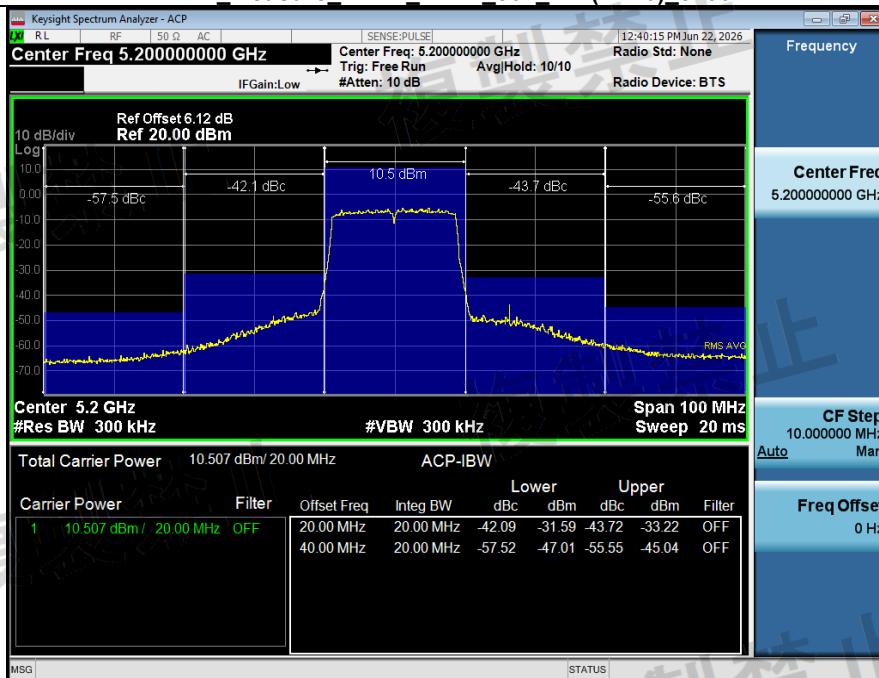


ACP Measure NVNT ANT2 802 11n(HT20) 5180

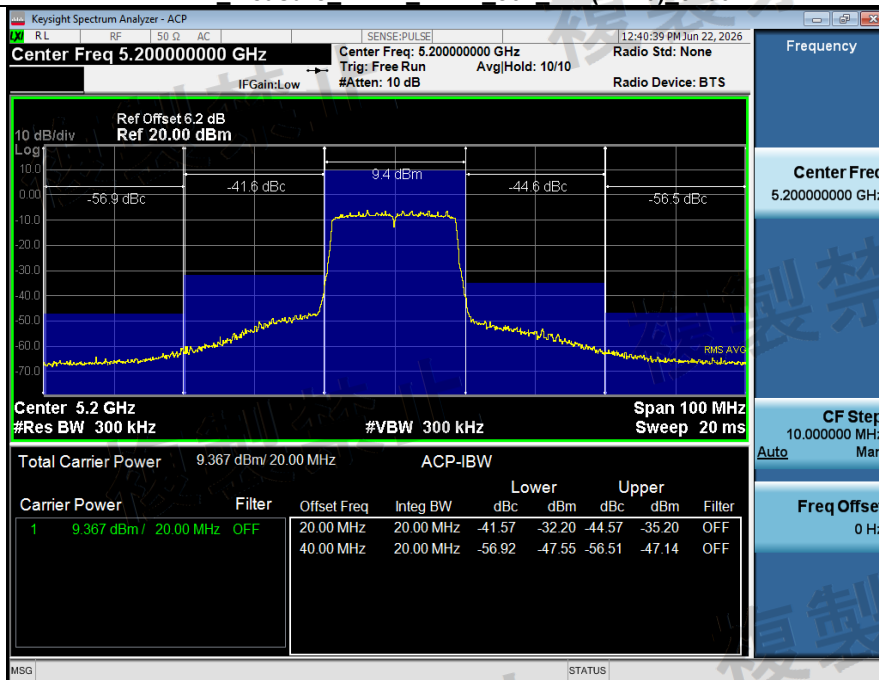




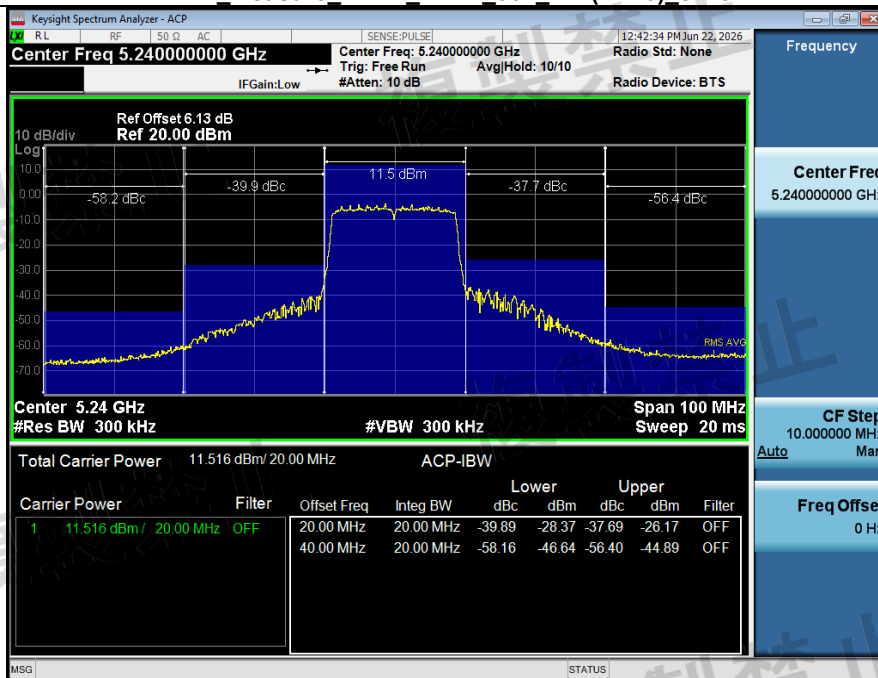
ACP Measure NVNT ANT1 802 11n(HT20) 5200



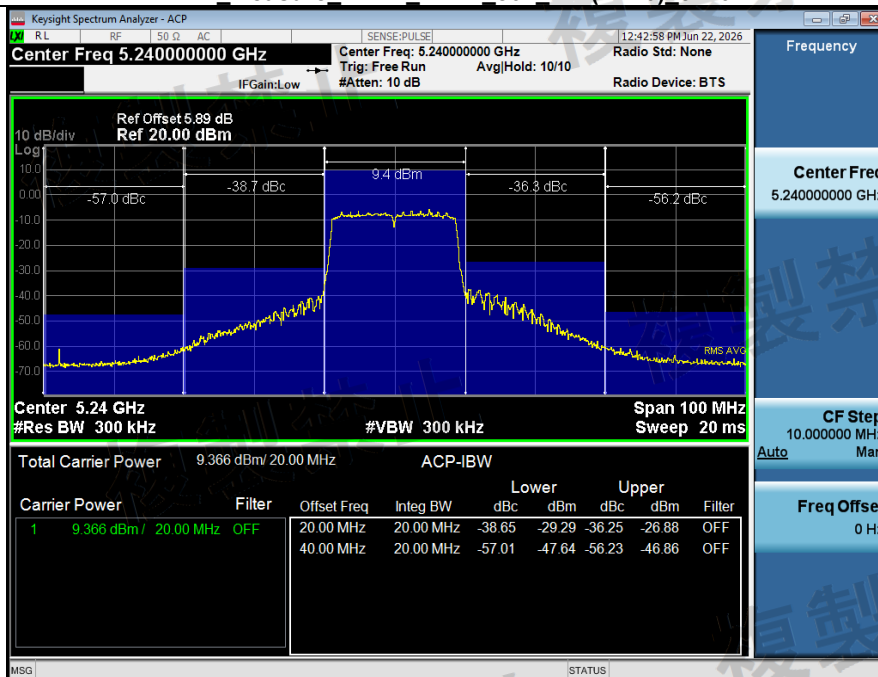
ACP Measure NVNT ANT2 802 11n(HT20) 5200



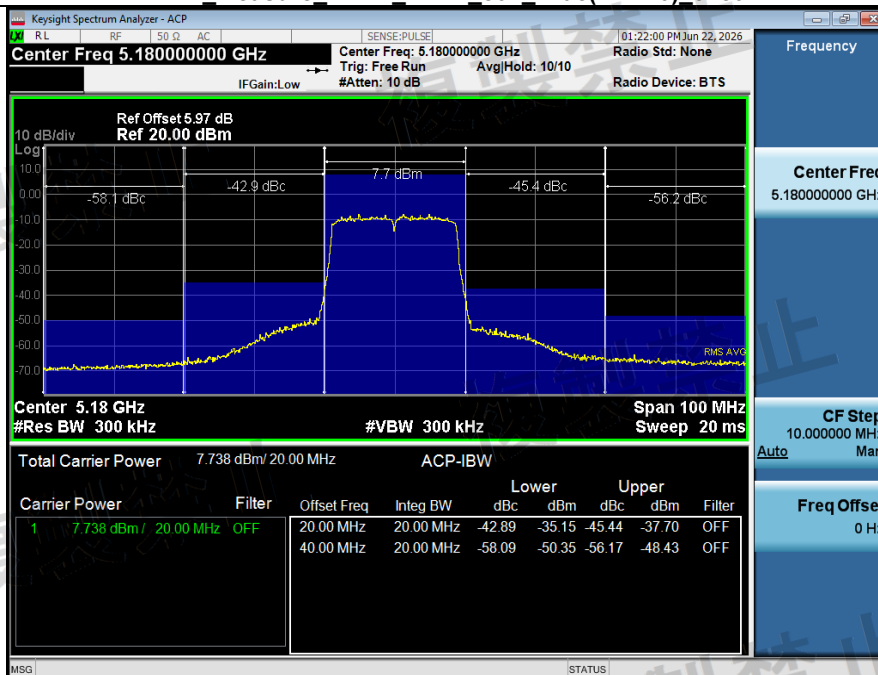
ACP_Measure_NVNT_ANT1_802_11n(HT20)_5240



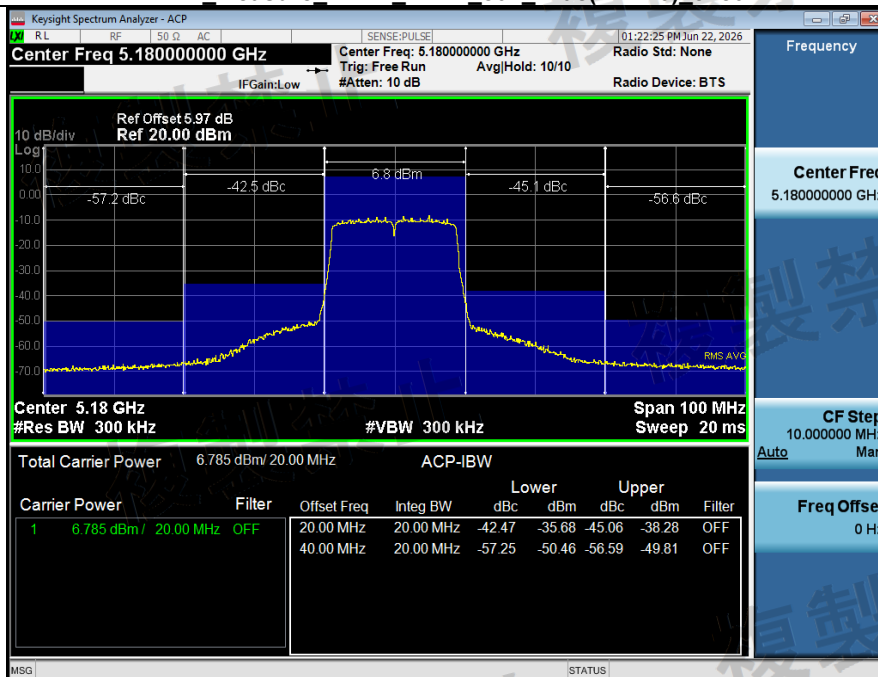
ACP_Measure_NVNT_ANT2_802_11n(HT20)_5240



ACP Measure NVNT ANT1 802 11ac(VHT20) 5180

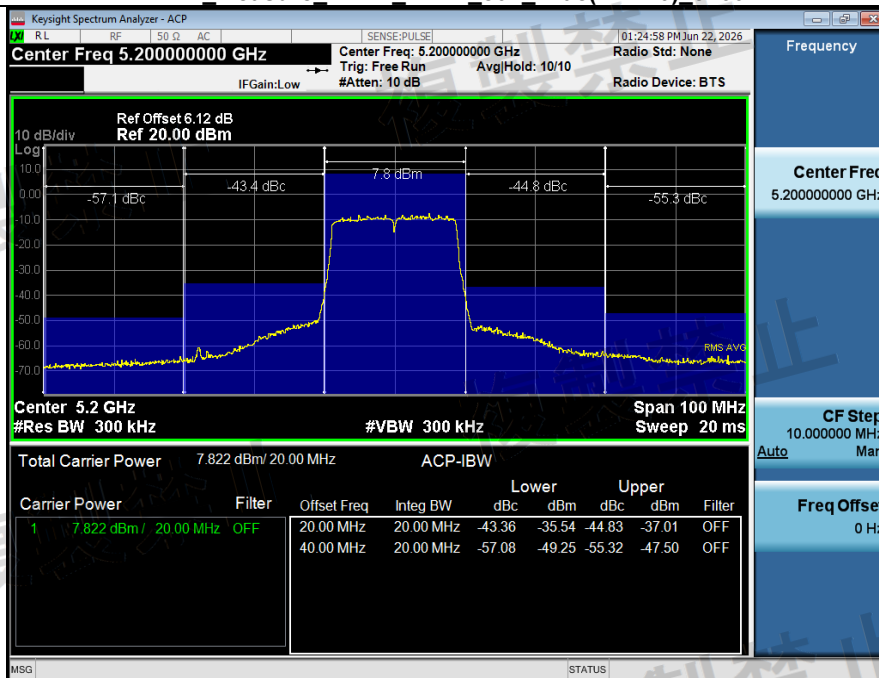


ACP Measure NVNT ANT2 802 11ac(VHT20) 5180

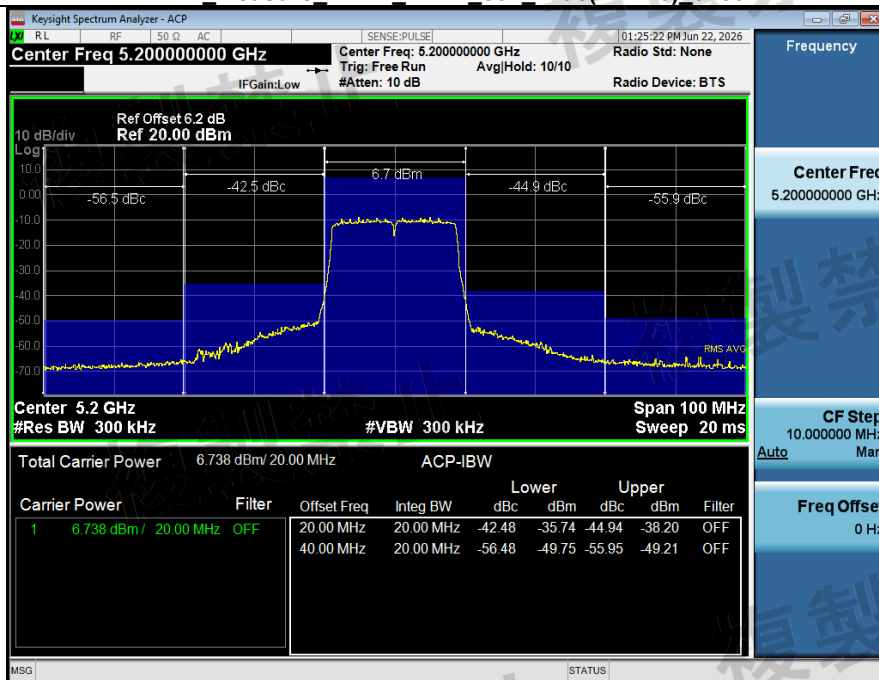




ACP Measure NVNT ANT1 802 11ac(VHT20) 5200

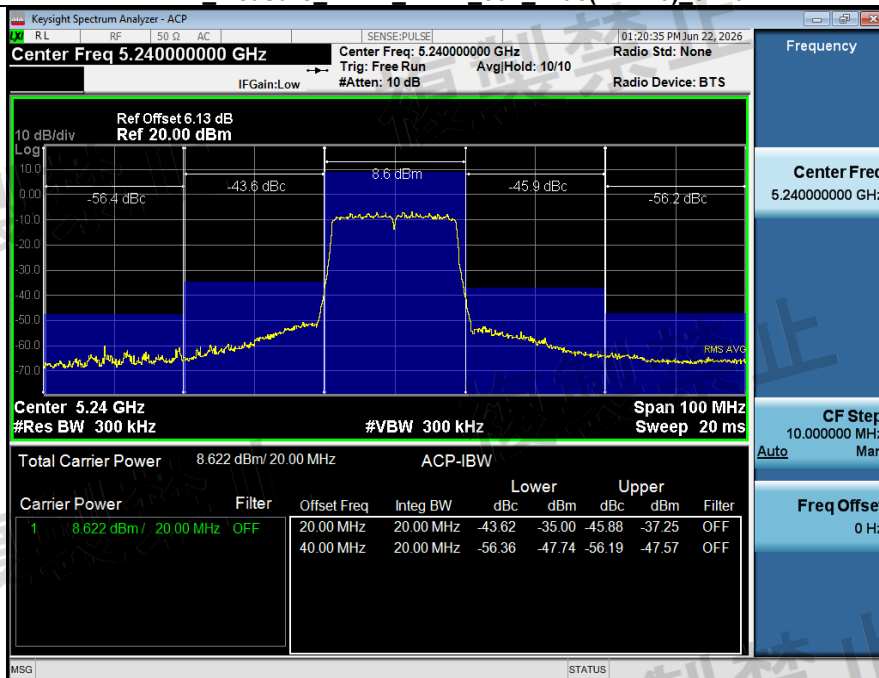


ACP Measure NVNT ANT2 802 11ac(VHT20) 5200

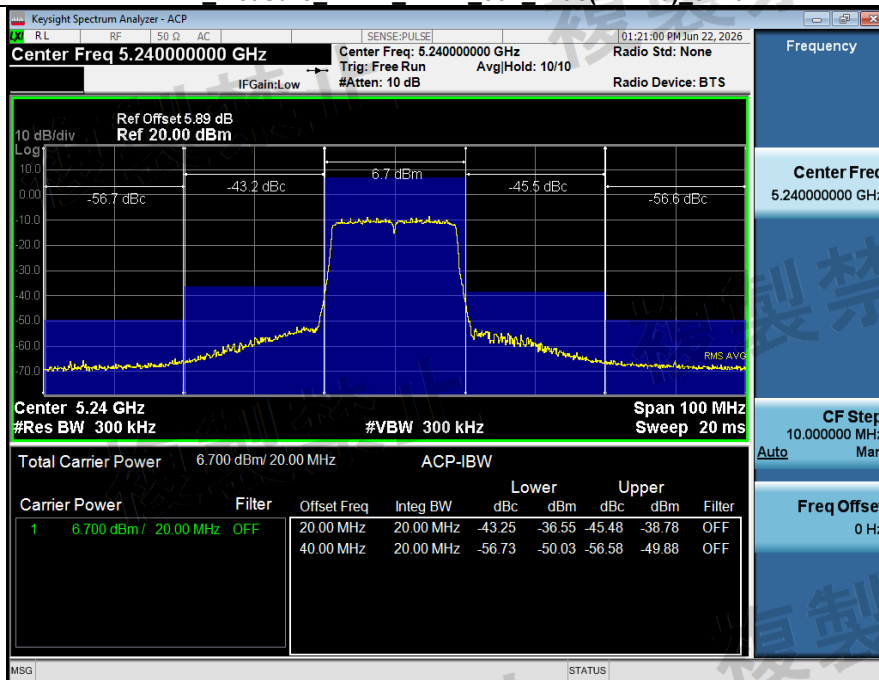




ACP Measure NVNT ANT1 802 11ac(VHT20) 5240

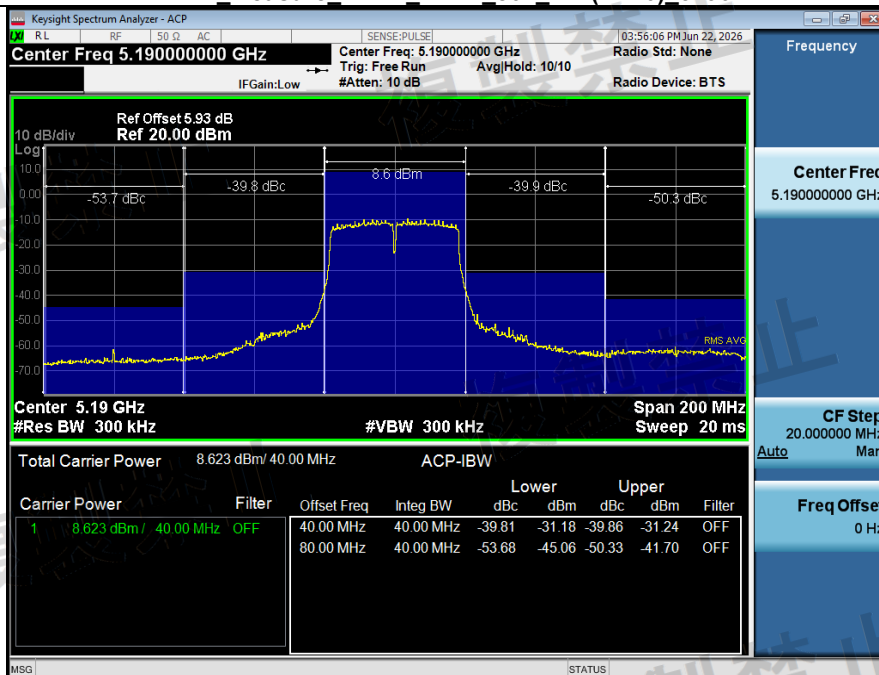


ACP Measure NVNT ANT2 802 11ac(VHT20) 5240

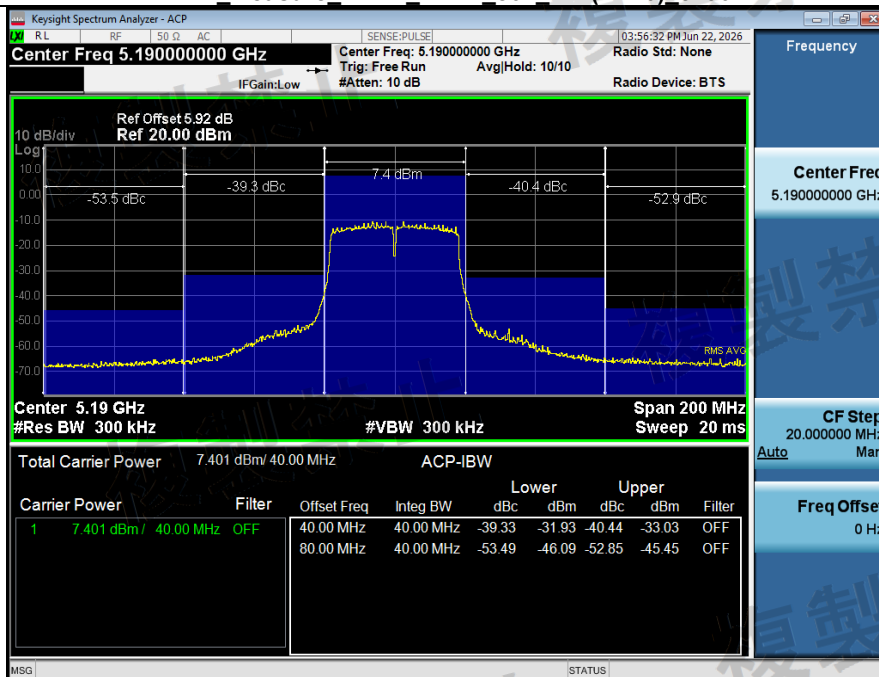




ACP_Measure_NVNT_ANT1_802_11n(HT40) 5190

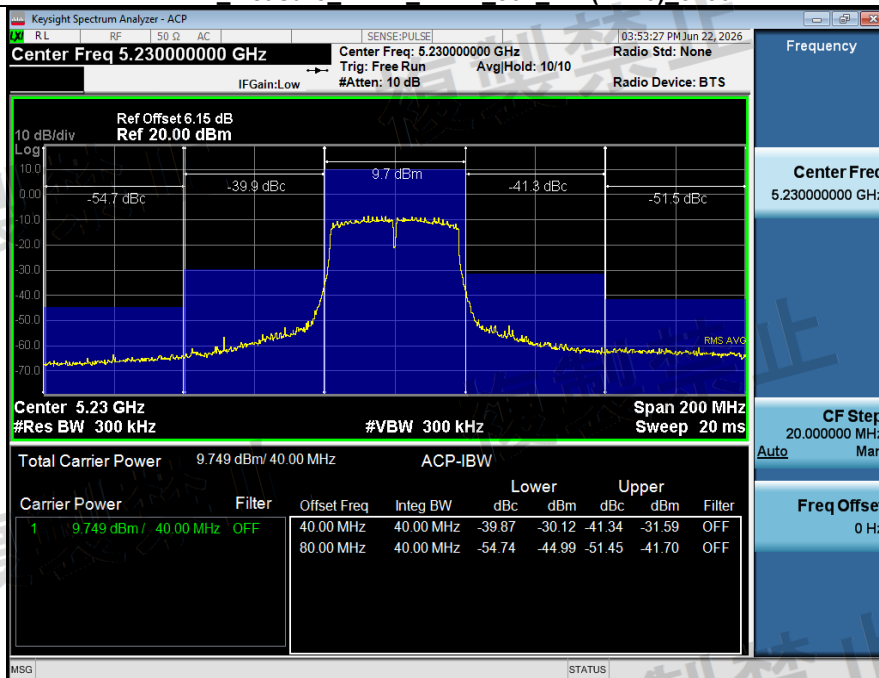


ACP_Measure_NVNT_ANT2_802_11n(HT40) 5190

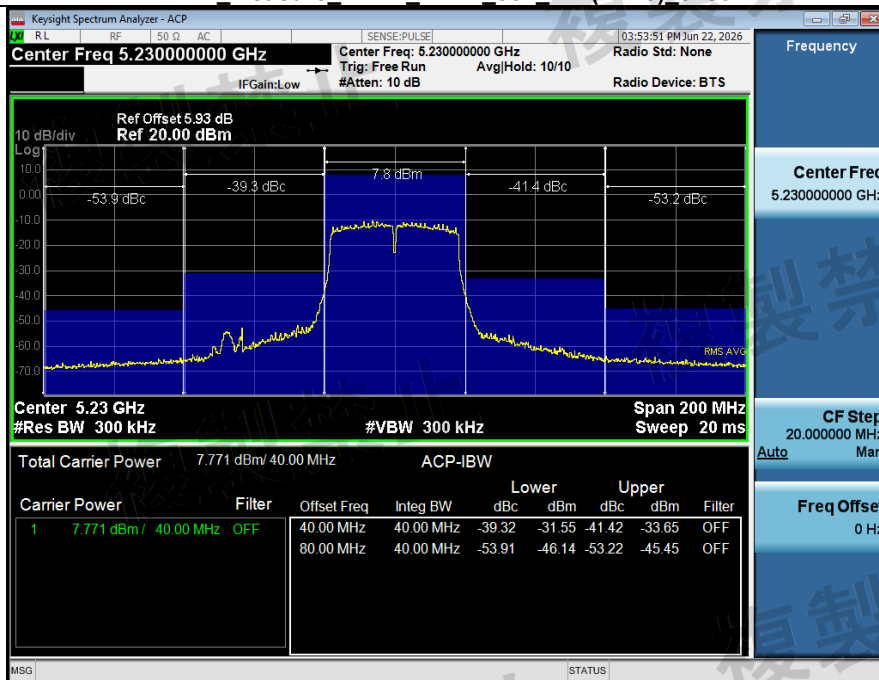




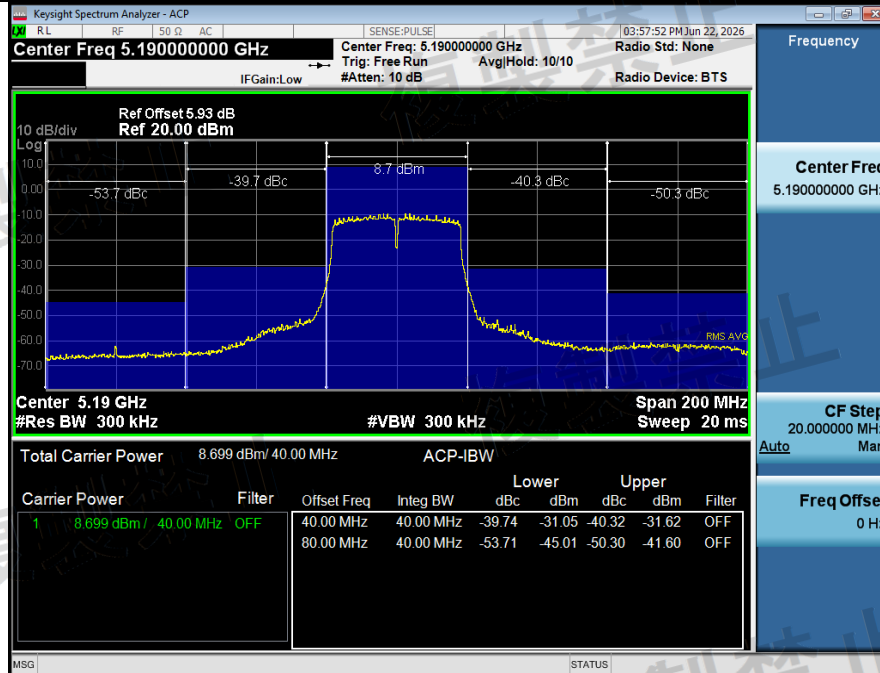
ACP_Measure_NVNT_ANT1_802_11n(HT40) 5230



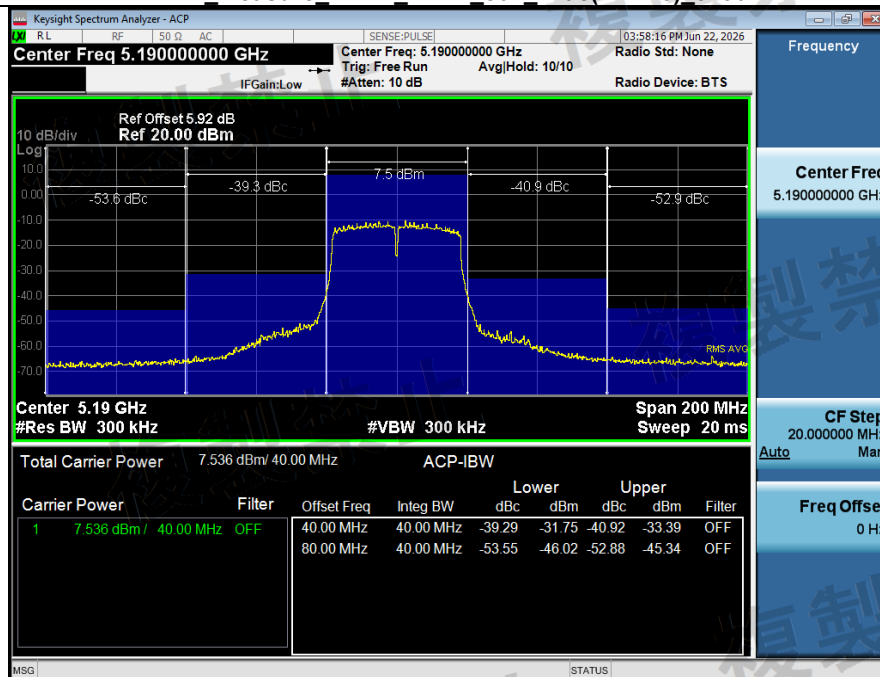
ACP_Measure_NVNT_ANT2_802_11n(HT40) 5230



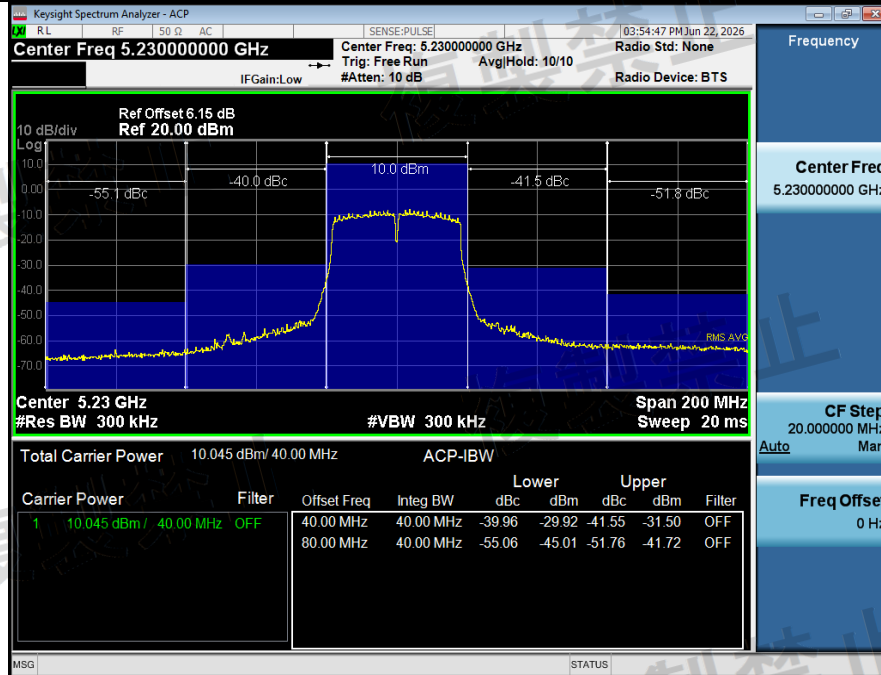
ACP Measure NVNT ANT1 802 11ac(VHT40) 5190



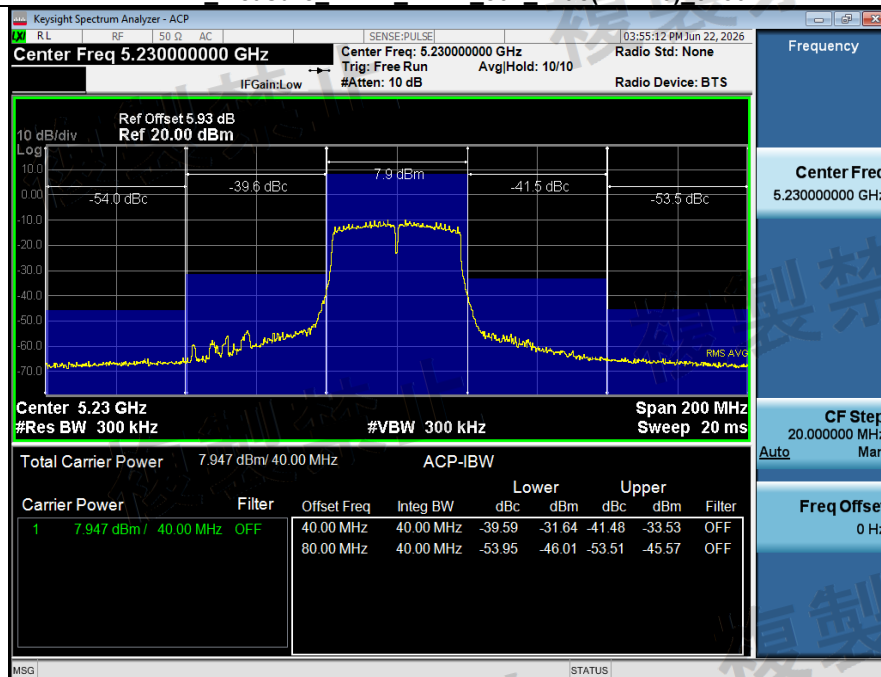
ACP Measure NVNT ANT2 802 11ac(VHT40) 5190



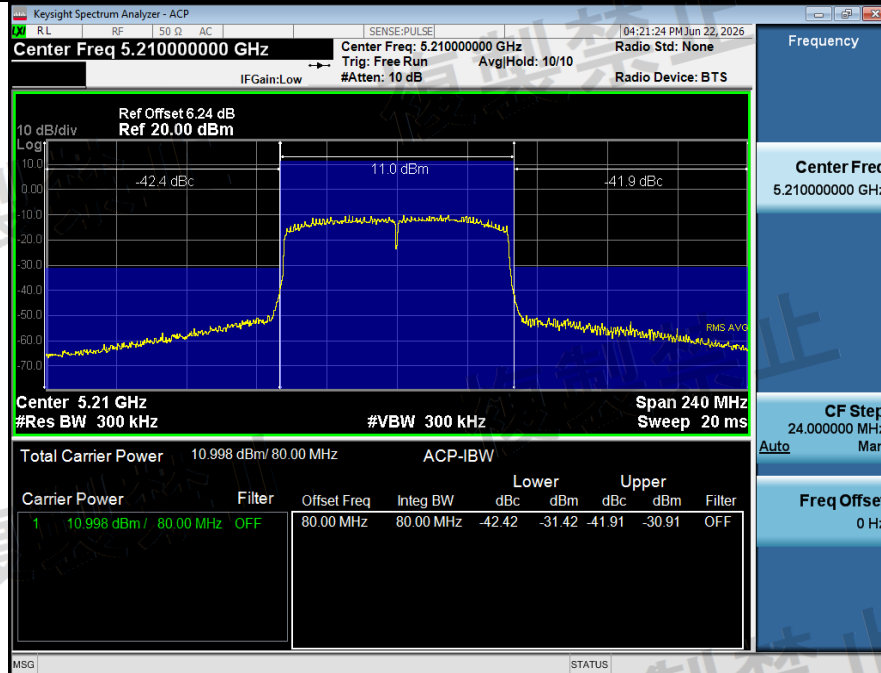
ACP Measure NVNT ANT1 802 11ac(VHT40) 5230



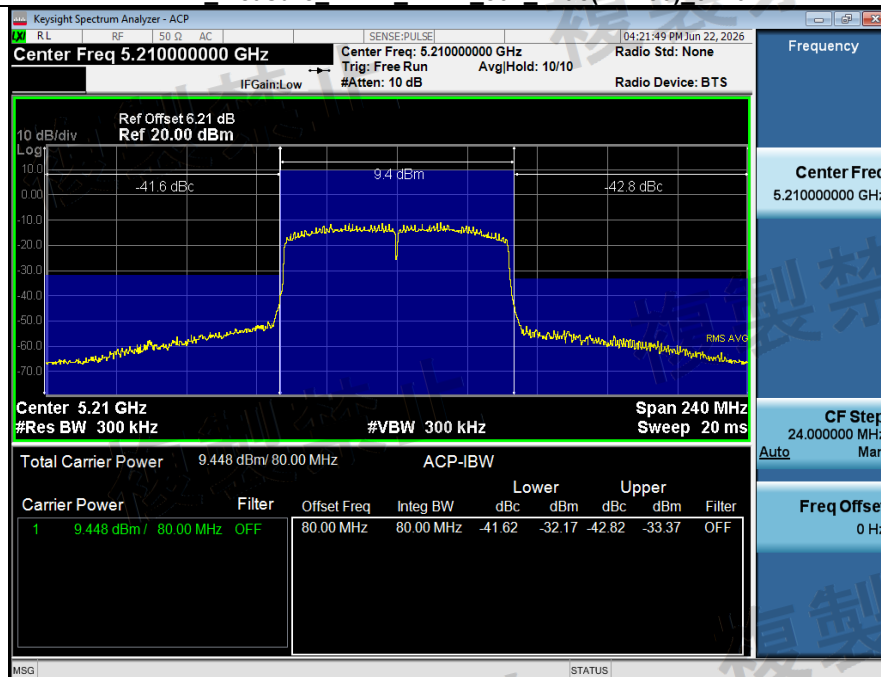
ACP Measure NVNT ANT2 802 11ac(VHT40) 5230



ACP Measure NVNT ANT1_802_11ac(VHT80) 5210



ACP Measure NVNT ANT2_802_11ac(VHT80) 5210



**Appendix A.8: Test Results of Carrier Sensing***Test Result*

Temperature:	24°C	Humidity:	56%RH
Test result:	Radio interference prevention capability was conformed.		

Type	Test channel	Result
11ac-VHT40	CH _L 40	Acceptance
	CH _M 40	
	CH _H 40	
11ac-VHT80	CH _L 80	Acceptance
	CH _H 80	
11n-HT40	CH _L 40	Acceptance
	CH _M 40	
	CH _H 40	

Appendix A.9: Test Results of Interference Prevention Function

Test Result

Temperature:	24°C	Humidity:	56%RH
MAC address:	f9:e7:3a:d4:08:2d	Test result:	Conform