



晶復科技股份有限公司

A Test Lab Techno Corp.

低功率射頻電機試驗報告

報告編號 1909DR38

版本(Rev.) 01

產品名稱 華為眼鏡 (Bluetooth/NFC)

申請廠商 訊巖技術有限公司

商標或廠牌 HUAWEI

型式 (號) CMG0-PER

產品試驗依據之標準 低功率射頻電機技術規範(LP0002) 107 年 1 月 10 日

報告發行日期 108 年 10 月 04 日

填發本型式認可報告之試驗機構 (認可代號)

晶復科技股份有限公司
33465 桃園市八德區長安街 140-1 號
Tel : 03-2710188 / Fax : 03-2710190



財團法人全國認證基金會
認證編號 : 1330
認證有效期間 : 108.09.06 ~ 111.09.05
認可能量範圍 : 低功率射頻電機技術規範(LP0002)
2.4 GHz 射頻電信終端設備技術規範(RTTE01)

免責聲明

- 1.本測試報告所敘述之測試結果，僅對顧客所提供之測試樣品，在此測試報告所述及之測試條件下，所實施之量測有效。
- 2.本測試報告未經晶復科技股份有限公司書面同意，不得部分複製本報告內容。
- 3.本測試報告內容之相關資訊皆由顧客提供，針對顧客所提供資訊之正確性、適當性或完整性，若有疑義或錯誤，並因此影響本測試報告結果有效性時，本實驗室不負其相關責任。

報告修訂紀錄

版本 (Rev.)	發行日期	修訂內容	修訂者
00	108 年 10 月 02 日	初版發行	林珮鈺
01	108 年 10 月 04 日	第 6 頁更新附屬裝置表。 第 9 頁測試模式增加註 2。 移除電源線傳導干擾之量測相關測試結果 項目。 更新 External Photos。	林珮鈺

低功率射頻電機測試證明書

發行日期：108年10月04日


產品名稱：華為眼鏡 (Bluetooth/NFC)
商標：HUAWEI
型號：CMG0-PER
申請廠商：訊歲技術有限公司
申請者地址：臺北市內湖區洲子街55、57號3樓
製造廠商：HUAWEI TECHNOLOGIES CO., LTD.
製造商地址：Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen
待測物電壓：DC 5 V, 2 A
試驗電壓：110 Vac, 60 Hz / DC 3.82 V
量測規範：低功率射頻電機技術規範(LP0002) 107年1月10日
試驗實驗室：晶復科技股份有限公司(桃園市八德區長安街140-1號)
試驗受理日期：108 年 08 月 27 號
樣品接受日期：108 年 09 月 13 號
試驗完成日期：108 年 09 月 13 號

報告中所描述之測試結果與待測設備之架構組合，均根據實際量測情況作詳實的記錄。


由測試結果顯示，上述待測設備樣機確實已符合低功率射頻電機技術規範(LP0002)所規定的各項限制值。

特此證明！

測試者：


(楊 凱 宇)

審核者：


(呂 宏 洋)

目 錄

名 稱	頁 次
低功率射頻電機測試證明書	3
1. 一般敘述	5
1.1 待測設備一般敘述	5
1.2 其他相關聲明	6
2. 量測儀器及測試配置說明	7
2.1 量測設備	7
2.2 檢驗系統示意圖	8
2.3 輔助測試之週邊設備描述	8
2.4 測試軟體版本	9
2.5 測試模式	9
2.6 量測不確定度	10
2.7 試驗環境	10
3. 測試項目與結果判定總表	11
4. 測試項目表列	12
4.1 輸出峰值功率之量測	12
4.2 電源線傳導干擾之量測	17
4.3 場強輻射之量測	18
4.4 非必要頻帶之量測	64
4.5 頻率範圍之要求	74
4.6 發射頻寬之要求	77
4.7 頻道數之要求	82
4.8 跳頻系統之載波頻率頻道間隔之量測	85
4.9 跳頻系統之任一頻率佔用之平均時間之量測	88
4.10 功率密度之要求	93
4.11 天線規格之要求	95

1. 一般敘述

1.1 待測設備一般敘述

本敘述僅針對產品簡單說明之，其他詳細之規格請參考使用說明書。

產 品 名 稱	華為眼鏡 (Bluetooth/NFC)			
商 標 或 廠 牌	HUAWEI			
型 號	CMG0-PER			
額 定 電 源	DC 5 V, 2 A			
調 變 方 式	GFSK, $\pi/4$ -DQPSK, 8DPSK			
頻 率 使 用 範 圍	2402 MHz – 2480 MHz			
天 線 廠 牌	博敏電子			
天 線 型 號	309000318913R1			
天 線 型 態	FPC Antenna			
天 線 增 益 值	-1.35 dBi			
RF 最大輸出功率	右鏡架			
	BR, GFSK:	9.42 dBm/	0.00875	W
	EDR, $\pi/4$ -DQPSK:	9.24 dBm/	0.00839	W
	EDR, 8DPSK:	9.42 dBm/	0.00875	W
	LE, GFSK:	1.61 dBm/	0.00145	W
	左鏡架			
	BR, GFSK:	8.09 dBm/	0.00644	W
	EDR, $\pi/4$ -DQPSK:	7.53 dBm/	0.00566	W
	EDR, 8DPSK:	7.59 dBm/	0.00574	W
	LE, GFSK:	-0.54 dBm/	0.00088	W

輸出/輸入埠說明：

輸 出 / 入 埠		數 量	介 面 內 容 說 明
1	---	---	---

待測設備外圍說明：

電 源 線 類 別	無
附 屬 裝 置	請參見下列附屬裝置表

附屬裝置表:

裝置名稱	廠牌	型號	備註
內建固定式電池	HUAWEI	HB410935ECW	3.82 VDC, 85 mAh
HUAWEI 眼鏡充電盒	HUAWEI	CMG0-PER	INPUT : DC 5 V, 2 A OUTPUT : DC 5 V, 0.5 A
USB Cable (for HUAWEI 眼鏡充電盒)	HUAWEI	04071773	STD-A → Type-C Shielded, 1.0 m

1.2 其他相關聲明

本測試報告屬(以下選擇一種打■)

☒	申請新的型式檢驗認可的測試。
☐	已取得型式檢驗認可之商品,因設計變更而重新測試 (變更內容請參考產品概述). 登錄號碼: XXXXXXXX

2. 量測儀器及測試配置說明

2.1 量測設備

For Conducted

Test Period: Sep. 13, 2019

名稱	廠牌	型號	序號	本次校驗日期	校驗年限
藍牙模擬基地台	R & S	CBT	100350	03/27/2019	2 years
Spectrum Analyzer	Agilent	N9020A	US47520902	09/25/2018	1 year
Power Sensor	Anritsu	MA2411B	1126022	09/02/2019	1 year
Power Meter	Anritsu	ML2495A	1135009	09/02/2019	1 year

For Radiated Emissions


Test Period: Sep. 13, 2019

名稱	廠牌	型號	序號	本次校驗日期	校驗年限
藍芽模擬基地台	R & S	CBT	100350	03/27/2019	2 years
EXA Signal Analyzer	Keysight	N9010A	MY52221312	01/14/2019	1 year
Amplifier	Agilent	8449B	3008A02237	10/16/2018	1 year
Amplifier	Agilent	8447D	2944A11119	01/14/2019	1 year
天線	SCHWARZBECK MESS-ELEKTRONIK	VULB 9168	416	10/19/2018	1 year
天線(1~18 GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	08/21/2019	1 year
天線(18~40 GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	08/14/2019	1 year

2.2 檢驗系統示意圖


輻射干擾測試配置

Below 1 GHZ

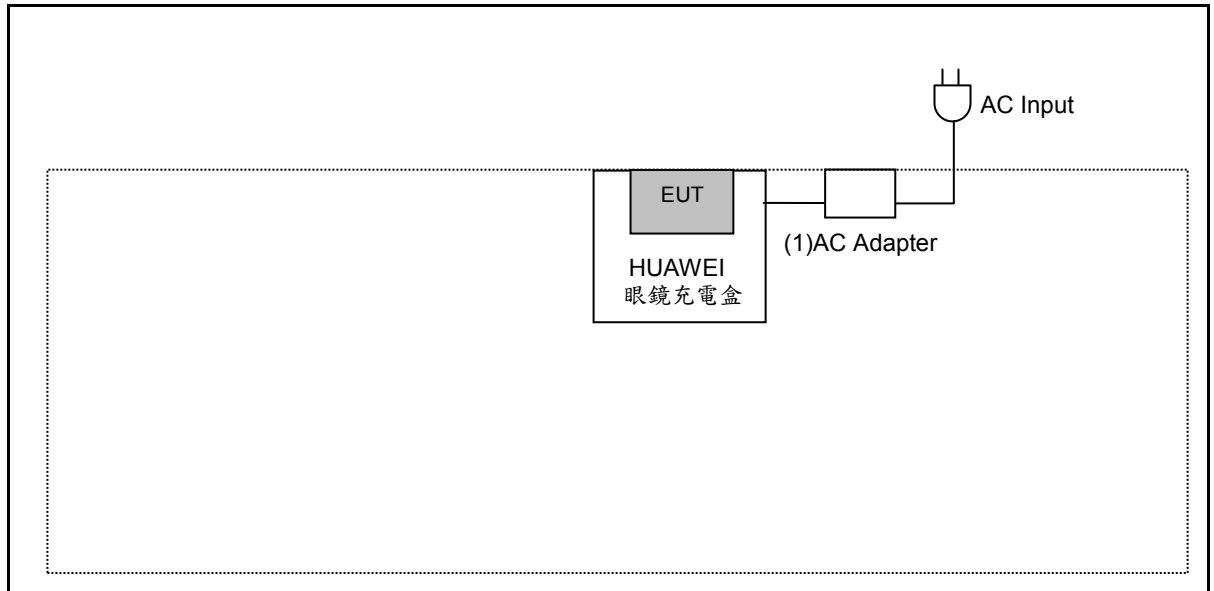

輻射干擾測試配置

Above 1 GHZ

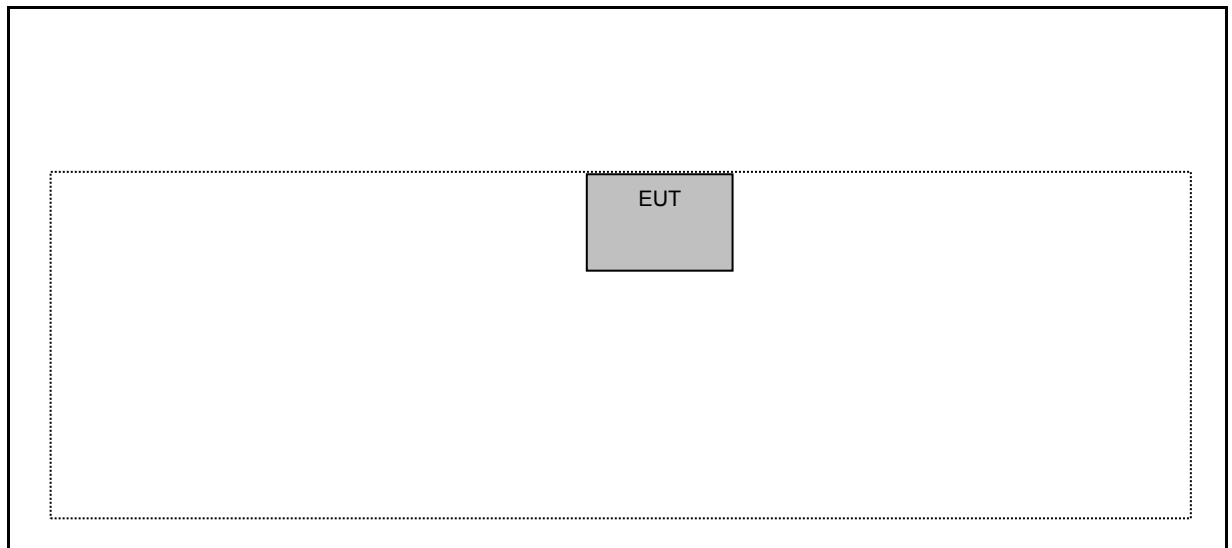

2.3 輔助測試之週邊設備描述

下列輔助設備或配件為測試中所使用，以形成一個代表性的受測系統。

週邊名稱		商標	型 號	序 號	電 源 線	備註
(1)	AC Adapter	HUAWEI	HW-100400U00	---	---	INPUT : AC 100 V-240 V , 50/60 Hz , 1.2 A OUTPUT : DC 5 V , 1.0 A or DC 9 V , 2 A or DC 10 V , 4 A

2.4 測試軟體版本

Measurement Software			
No.	Description	Software	Version
1	Radiated Emission	EZ EMC	1.1.4.4

2.5 測試模式

Pre-Test Mode
Mode 1: Transmit Mode
Mode 2: BR,GFSK Continuous TX Mode
Mode 3: EDR, $\pi/4$ -DQPSK Continuous TX Mode
Mode 4: EDR, 8DPSK Continuous TX Mode
Mode 5: LE, GFSK Continuous TX Mode
Mode 6: Receiver Mode

Final-Test Mode
Mode 2: BR,GFSK Continuous TX Mode
Mode 4: EDR, 8DPSK Continuous TX Mode
Mode 5: LE, GFSK Continuous TX Mode
Mode 6: Receiver Mode

註 1：左右鏡架除麥克風元件外，其餘電路設計均相同，經驗證右鏡架為 Worst case。

註 2：場強輻射 1 GHz 以下經驗證單眼鏡、眼鏡及充電盒，結果為眼鏡及充電盒最 Worst，因此場強輻射 1 GHz 以下僅呈現眼鏡及充電盒量測數據。

2.6 量測不確定度

下列量測不確定水準是參照量測儀器 CISPR 16-4-2 所規定之不確定度。

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	150 kHz ~ 30 MHz	2.8
Radiated Emission	9 kHz ~ 30 MHz	1.7
	30 MHz ~ 1000 MHz	5.7
	1000 MHz ~ 18000 MHz	5.6
	18000 MHz ~ 26500 MHz	4.9
	26500 MHz ~ 40000 MHz	4.8
Conducted Output Power	+0.27 dB / -0.28 dB	
RF Bandwidth	4.96 %	
Power Spectral Density	+0.71 dB / -0.77 dB	

Decision Rule

☒ Uncertainty is not included.

☐ Uncertainty is included.

2.7 試驗環境

產品測試時之實驗室環境條件如下：

項 目	測 試 項 目	需 求	實 際
溫度 Temperature (°C)	LP0002	10 - 40	26
濕度 Humidity (%RH)		10 - 90	60

3. 測試項目與結果判定總表

本測試報告之所有項目皆依據 NCC 低功率射頻電機技術規範(LP0002)之檢驗法。

BR/EDR 測試項目

項次	測試項目	適用規範	測試結果	量測設備	結果判定
1	輸出峰值功率	低功率射頻電機技術規範 3.10.1.2(1)(B)節	請參閱4.1節	請參閱2.1節	合格
2	電源線傳導干擾	低功率射頻電機技術規範 2.3節	請參閱4.2節	請參閱2.1節	不適用
3	場強輻射 (1 GHz以上)	低功率射頻電機技術規範 2.8節、2.9節、3.10.1.5節	請參閱4.3節	請參閱2.1節	合格
4	場強輻射其它不必要之訊號 (1 GHz以下)	低功率射頻電機技術規範 2.8節、2.9節、3.10.1.5節	請參閱4.3節	請參閱2.1節	合格
5	頻帶邊緣外之輻射發射	低功率射頻電機技術規範 3.10.1.5節	請參閱4.3節	請參閱2.1節	合格
6	非必要頻帶	低功率射頻電機技術規範 3.10.1.5節	請參閱4.4節	請參閱2.1節	合格
7	頻率範圍	低功率射頻電機技術規範 3.10.1.1節	請參閱4.5節	請參閱2.1節	合格
8	發射頻寬	低功率射頻電機技術規範 3.10.1.6(1)(A)節	請參閱4.6節	請參閱2.1節	合格
9	頻道數	低功率射頻電機技術規範 3.10.1.6(1)(A)(a)節	請參閱4.7節	請參閱2.1節	合格
10	跳頻系統之載波頻率頻道間隔	低功率射頻電機技術規範 3.10.1.6(1)(A)節	請參閱4.8節	請參閱2.1節	合格
11	跳頻系統之任一頻率佔用之 平均時間	低功率射頻電機技術規範 3.10.1.6(1)(A)(a)節	請參閱4.9節	請參閱2.1節	合格
12	天線規格	低功率射頻電機技術規範 3.10.1.3(3)節、3.10.1.4節	請參閱4.11節	-----	合格

LE 測試項目

項次	測試項目	適用規範	測試結果	量測設備	結果判定
1	輸出峰值功率	低功率射頻電機技術規範 3.10.1.2(1)(C)節	請參閱4.1節	請參閱2.1節	合格
2	電源線傳導干擾	低功率射頻電機技術規範 2.3節	請參閱4.2節	請參閱2.1節	不適用
3	場強輻射 (1 GHz以上)	低功率射頻電機技術規範 2.8節、2.9節、3.10.1.5節	請參閱4.3節	請參閱2.1節	合格
4	場強輻射其它不必要之訊號 (1 GHz以下)	低功率射頻電機技術規範 2.8節、2.9節、3.10.1.5節	請參閱4.3節	請參閱2.1節	合格
5	頻帶邊緣外之輻射發射	低功率射頻電機技術規範 3.10.1.5節	請參閱4.3節	請參閱2.1節	合格
6	非必要頻帶	低功率射頻電機技術規範 3.10.1.5節	請參閱4.4節	請參閱2.1節	合格
7	發射頻寬	低功率射頻電機技術規範 3.10.1.6(2)(A)節	請參閱4.6節	請參閱2.1節	合格
8	功率密度	低功率射頻電機技術規範 3.10.1.6(2)(B)節	請參閱4.10節	請參閱2.1節	合格
9	天線規格	低功率射頻電機技術規範 3.10.1.3(3)節、3.10.1.4節	請參閱4.11節	-----	合格

4. 測試項目表列

4.1 輸出峰值功率之量測

合格標準：

BR/EDR


依據 NCC 低功率射頻電機技術規範(LP0002)之 3.10.1.2(1)(B)節之要求，所有操作於 2400-2483.5 兆赫且輸出功率應小於或等於 0.125 W。

LE

依據 NCC 低功率射頻電機技術規範(LP0002)之 3.10.1.2(1)(C)節之要求，操作於 2400-2483.5 兆赫(MHz)之所有數位調變技術系統：1 瓦(W)以下。

除使用附件二之峰值輸出功率量測方式外，並得使用以最大傳導輸出功率(Maximum Conducted Output Power)作為量測方式。

測試架構圖：

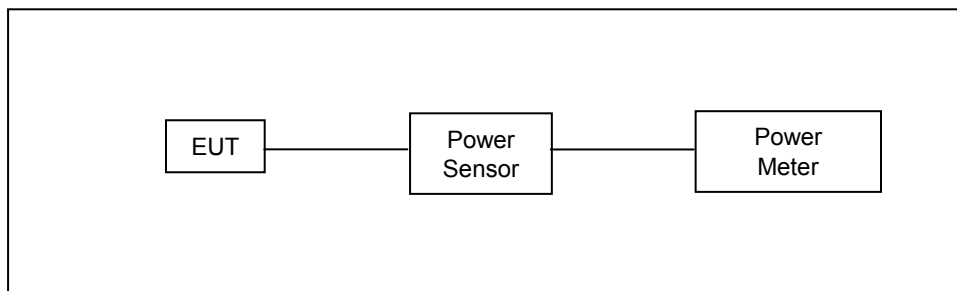

測試結果:

右鏡架

操作模式 : Mode 2: BR, GFSK Continuous TX Mode						
頻道		輸出功率(Average)		輸出功率(Peak)		限制值
		dBm	W	dBm	W	W
低頻道	DH1	9.17	0.00826	9.39	0.00869	≤0.125
	DH3	9.18	0.00828	9.40	0.00871	≤0.125
	DH5	9.19	0.00830	9.42	0.00875	≤0.125
中頻道	DH1	8.88	0.00773	9.14	0.00820	≤0.125
	DH3	8.90	0.00776	9.15	0.00822	≤0.125
	DH5	8.91	0.00778	9.16	0.00824	≤0.125
高頻道	DH1	8.48	0.00705	8.74	0.00748	≤0.125
	DH3	8.49	0.00706	8.76	0.00752	≤0.125
	DH5	8.51	0.00710	8.77	0.00753	≤0.125

操作模式 : Mode 3: EDR, π/4-QPSK Continuous TX Mode						
頻道		輸出功率(Average)		輸出功率(Peak)		限制值
		dBm	W	dBm	W	W
低頻道	2DH1	7.83	0.00607	9.21	0.00834	≤0.125
	2DH3	7.85	0.00610	9.22	0.00836	≤0.125
	2DH5	7.88	0.00614	9.24	0.00839	≤0.125
中頻道	2DH1	7.55	0.00569	9.10	0.00813	≤0.125
	2DH3	7.57	0.00571	9.12	0.00817	≤0.125
	2DH5	7.58	0.00573	9.13	0.00818	≤0.125
高頻道	2DH1	7.07	0.00509	8.75	0.00750	≤0.125
	2DH3	7.09	0.00512	8.77	0.00753	≤0.125
	2DH5	7.11	0.00514	8.78	0.00755	≤0.125

操作模式 : Mode 4: EDR, 8DPSK Continuous TX Mode						
頻道		輸出功率(Average)		輸出功率(Peak)		限制值
		dBm	W	dBm	W	W
低頻道	3DH1	7.98	0.00628	9.38	0.00867	≤0.125
	3DH3	8.00	0.00631	9.40	0.00871	≤0.125
	3DH5	8.01	0.00632	9.42	0.00875	≤0.125
中頻道	3DH1	7.67	0.00585	9.16	0.00824	≤0.125
	3DH3	7.69	0.00587	9.17	0.00826	≤0.125
	3DH5	7.71	0.00590	9.20	0.00832	≤0.125
高頻道	3DH1	7.09	0.00512	8.78	0.00755	≤0.125
	3DH3	7.11	0.00514	8.80	0.00759	≤0.125
	3DH5	7.13	0.00516	8.81	0.00760	≤0.125

操作模式 : Mode 5: LE, GFSK Continuous TX Mode					
頻道	輸出功率(Average)		輸出功率(Peak)		限制值
	dBm	W	dBm	W	W
低頻道	0.77	0.00119	1.53	0.00142	≤ 1
中頻道	0.90	0.00123	1.61	0.00145	≤ 1
高頻道	0.26	0.00106	0.93	0.00124	≤ 1

左鏡架

操作模式 : Mode 2: BR,GFSK Continuous TX Mode						
頻道		輸出功率(Average)		輸出功率(Peak)		限制值
		dBm	W	dBm	W	W
低頻道	DH1	8.29	0.00675	8.05	0.00638	≤0.125
	DH3	8.31	0.00678	8.07	0.00641	≤0.125
	DH5	8.32	0.00679	8.09	0.00644	≤0.125
中頻道	DH1	7.61	0.00577	7.90	0.00617	≤0.125
	DH3	7.62	0.00578	7.92	0.00619	≤0.125
	DH5	7.64	0.00581	7.94	0.00622	≤0.125
高頻道	DH1	7.22	0.00527	7.63	0.00579	≤0.125
	DH3	7.23	0.00528	7.66	0.00583	≤0.125
	DH5	7.26	0.00532	7.68	0.00586	≤0.125

操作模式 : Mode 3: EDR, π/4-QPSK Continuous TX Mode						
頻道		輸出功率(Average)		輸出功率(Peak)		限制值
		dBm	W	dBm	W	W
低頻道	2DH1	5.93	0.00392	7.48	0.00560	≤0.125
	2DH3	5.94	0.00393	7.50	0.00562	≤0.125
	2DH5	5.95	0.00394	7.53	0.00566	≤0.125
中頻道	2DH1	5.79	0.00379	7.43	0.00553	≤0.125
	2DH3	5.81	0.00381	7.45	0.00556	≤0.125
	2DH5	5.83	0.00383	7.47	0.00558	≤0.125
高頻道	2DH1	5.24	0.00334	7.20	0.00525	≤0.125
	2DH3	5.25	0.00335	7.22	0.00527	≤0.125
	2DH5	5.28	0.00337	7.24	0.00530	≤0.125

操作模式 : Mode 4:EDR, 8DPSK Continuous TX Mode						
頻道		輸出功率(Average)		輸出功率(Peak)		限制值
		dBm	W	dBm	W	W
低頻道	3DH1	5.96	0.00394	7.54	0.00568	≤0.125
	3DH3	5.97	0.00395	7.57	0.00571	≤0.125
	3DH5	5.98	0.00396	7.59	0.00574	≤0.125
中頻道	3DH1	5.91	0.00390	7.50	0.00562	≤0.125
	3DH3	5.92	0.00391	7.52	0.00565	≤0.125
	3DH5	5.94	0.00393	7.54	0.00568	≤0.125
高頻道	3DH1	5.28	0.00337	7.28	0.00535	≤0.125
	3DH3	5.30	0.00339	7.30	0.00537	≤0.125
	3DH5	5.33	0.00341	7.31	0.00538	≤0.125

操作模式 : Mode 5: LE, GFSK Continuous TX Mode					
頻道	輸出功率(Average)		輸出功率(Peak)		限制值
	dBm	W	dBm	W	W
低頻道	-1.41	0.00072	-0.85	0.00082	≤ 1
中頻道	-1.15	0.00077	-0.54	0.00088	≤ 1
高頻道	-1.79	0.00066	-1.56	0.00070	≤ 1

4.2 電源線傳導干擾之量測

合格標準：

依據 NCC 低功率射頻電機技術規範(LP0002)之 2.3 節，以市電為電源之低功率射頻電機，其傳導回電源線上頻率自 150 kHz 至 30 MHz 之射頻電壓（在電源端子每一電源線對接地點）不得超過下表所列之限值。測量時應經過 50 Ω /50 μ H 之電源線阻抗模擬網路 (LISN)。

Frequency (MHz)	傳導限制值 (dBuV)	
	準峰值 (Quasi - peak)	平均值 (Average)
0.15 - 0.5	66 - 56 (註)	56 - 46 (註)
0.5 - 5	56	46
5 - 30	60	50

註：隨頻率之對數遞減。

測試方法：

測試場地為標準傳導測試場地。將待測物置於 0.8 米高的非金屬桌面，使其在工作狀態，待測物電源線接至電源線阻抗穩定網路上，從測試接收機記錄頻率由 0.15 MHz 至 30 MHz 之間之電源線傳導放射強度。


干擾值之計算

電源傳導干擾電壓之計算公式如下

結果值 = 儀器讀值(QP/AV) + 校正因子

其中校正因子為：饋線損失 + 電源阻抗模擬網路損失

測試架構圖：

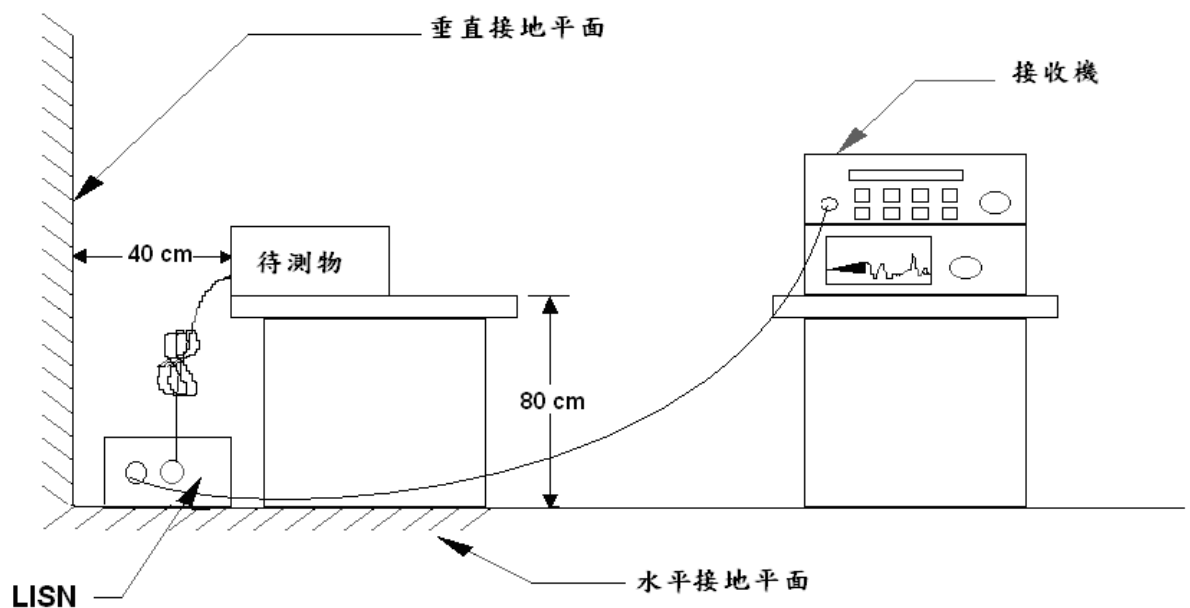

測試結果：不適用，本產品透過 WPC 供電。

4.3 場強輻射之量測

合格標準：

依據 NCC 低功率射頻電機技術規範(LP0002)之使用頻帶範圍外之任意 100 千赫 (kHz)內，發射機所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之 100 千赫(kHz)內的射頻功率，至少須衰減 20 dB，以射頻傳導或輻射方式測量。如發射機以依據 NCC 低功率射頻電機技術規範(LP0002)之 3.10.1.5(2)之峰值傳導輸出功率量測方式者，至少須衰減 30 dB。此外，落於第 2.7 節禁用頻段之輻射發射，應符合第 2.8 節之規定。

依據 NCC 低功率射頻電機技術規範第 2.7 節之規定,禁用頻段如下：

頻率(MHz)	頻率(MHz)	頻率(MHz)	頻率(MHz)
0.090~0.110	108.00~138.00	1660.0~1785.0	8025.0~8500.0
0.490~0.510	149.90~150.05	1805.0~1888.0	9000.0~9200.0
2.172~2.198	156.70~156.90	1885.0~1900.0	9300.0~9500.0
3.013~3.033	162.01~167.17	1905.0~1985.0	10600~12700
4.115~4.198	167.72~173.20	2010.0~2025.0	13250~13400
5.670~5.690	240.00~285.00	2110.0~2170.0	14470~14500
6.200~6.300	322.00~335.40	2200.0~2300.0	15350~16200
8.230~8.400	399.90~410.00	2310.0~2390.0	17700~21400
12.265~12.600	485.00~510.00	2483.5~2900.0	22010~23120
13.340~13.430	608.00~614.00	3260.0~3267.0	23600~24000
14.965~15.020	703.00~748.00	3332.0~3339.0	31200~31800
16.700~16.755	758.00~803.00	3345.8~3358.0	36430~36500
19.965~20.020	825.00~915.00	3500.0~4400.0	38600 以上
25.500~25.700	930.00~1240.0	4500.0~5250.0	
37.475~38.275	1300.0~1427.0	5350.0~5460.0	
73.500~75.400	1435.0~1626.5	7250.0~7750.0	

依據 NCC 低功率射頻電機技術規範第 2.8 節之規定,除本規範各章節另有放寬規定者外，其電場強度不得超過下表之限值，且其不必要之發射皆不得大於主波發射強度。各頻段重疊處，以較嚴格之限制值為準。

頻 率 (MHz)	電場強度 (μ V/m)	測距(m)
0.009 - 0.490(含)	2,400/頻率(千赫)	300
0.490 (不含) – 1.705 (含)	24,000/頻率(千赫)	30
1.705(不含) – 30 (不含)	30	30
30 (含) – 88 (含)	100	3
88 (不含)- 216 (含)	150	3
216 (不含)- 960 (含)	200	3
960 (不含)以上	500	3

測試方法：

測試場地為開放測試場,將待測物置於 0.8 米高的非金屬桌面,使其在工作狀態,接收天線置於 3 米外相同的高度。
待測物分別要垂直或水平放置,而且桌面要 360 度旋轉,另外接收天線也要從 1.0 米至 4.0 米升降變化,以找出最大的輻射電場強度,接收天線置於水平、垂直極向各執行測試一次。


場強度之計算

場強之計算公式為：結果值 = 讀值 + 校正因子


其中校正因子為：天線因子+ 饋線損失 + 濾波器損失（若有使用） - 放大器增益（若有使用）

測試架構圖：

量測頻率低於 1 GHz 以下之測試配置

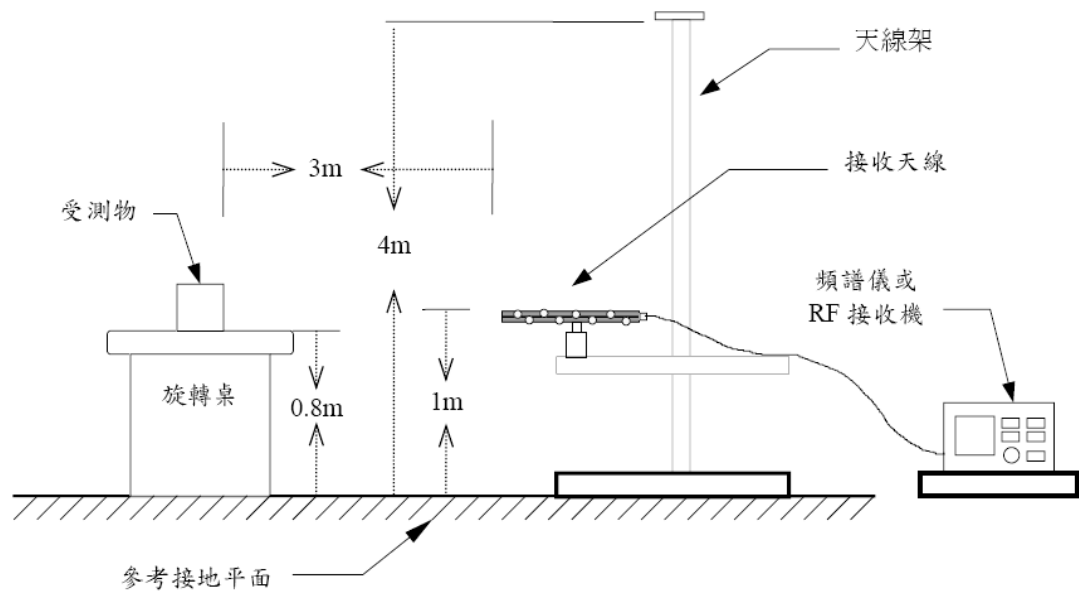

量測頻率高於 1 GHz 以上之測試配置

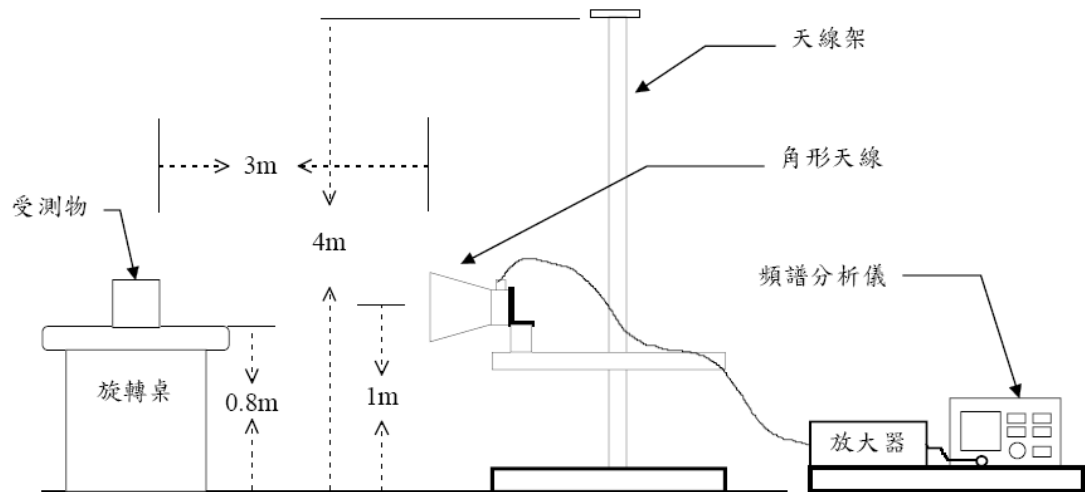


測試結果:

場強輻射之量測依據輸出峰值功率之量測結果取其最大值之操作模式為場強輻射測試模式。

其它不必要之訊號 (1 GHz 以下)

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Test Mode:	Mode 2		
Ant.Polar.:	Horizontal		

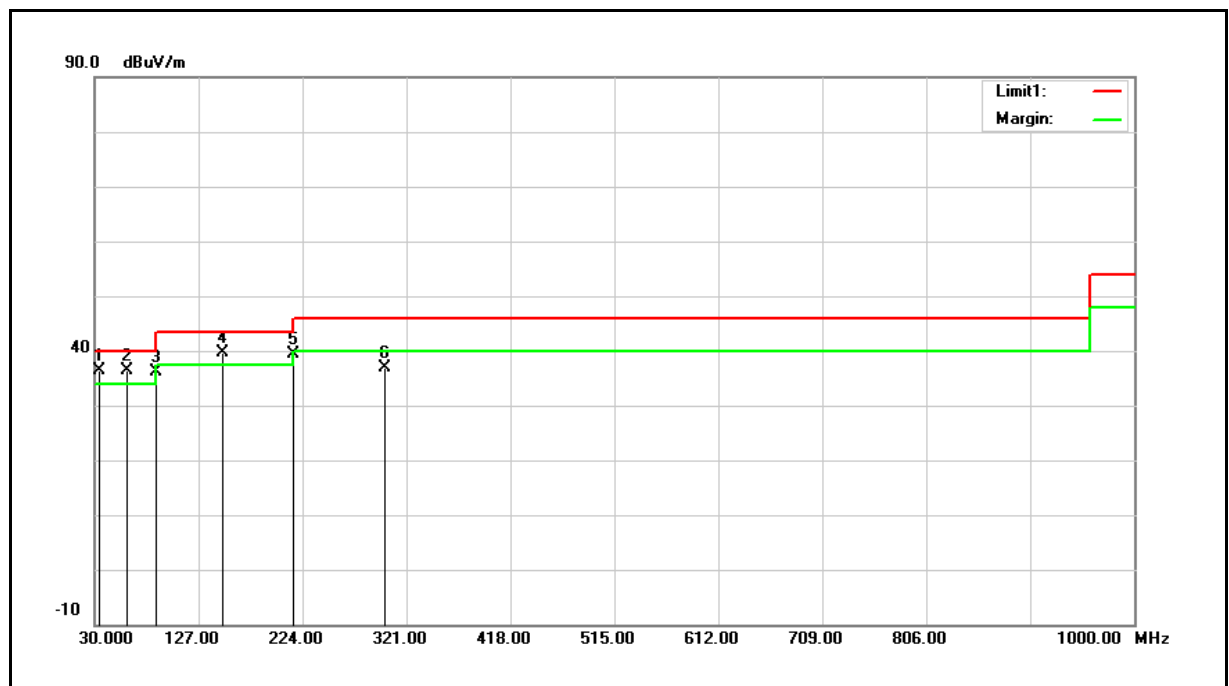

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	34.8500	44.06	-7.60	36.46	40.00	-3.54	QP
2	60.0700	43.44	-7.03	36.41	40.00	-3.59	QP
3	87.2300	48.22	-11.97	36.25	40.00	-3.75	QP
4	149.3100	45.53	-5.90	39.63	43.50	-3.87	QP
5	215.2700	46.98	-7.67	39.31	43.50	-4.19	QP
6	300.6300	40.96	-4.03	36.93	46.00	-9.07	QP


Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 36.46= -7.60+44.06

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 110 V/60 Hz
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Test Mode:	Mode 2		
Ant.Polar.:	Vertical		

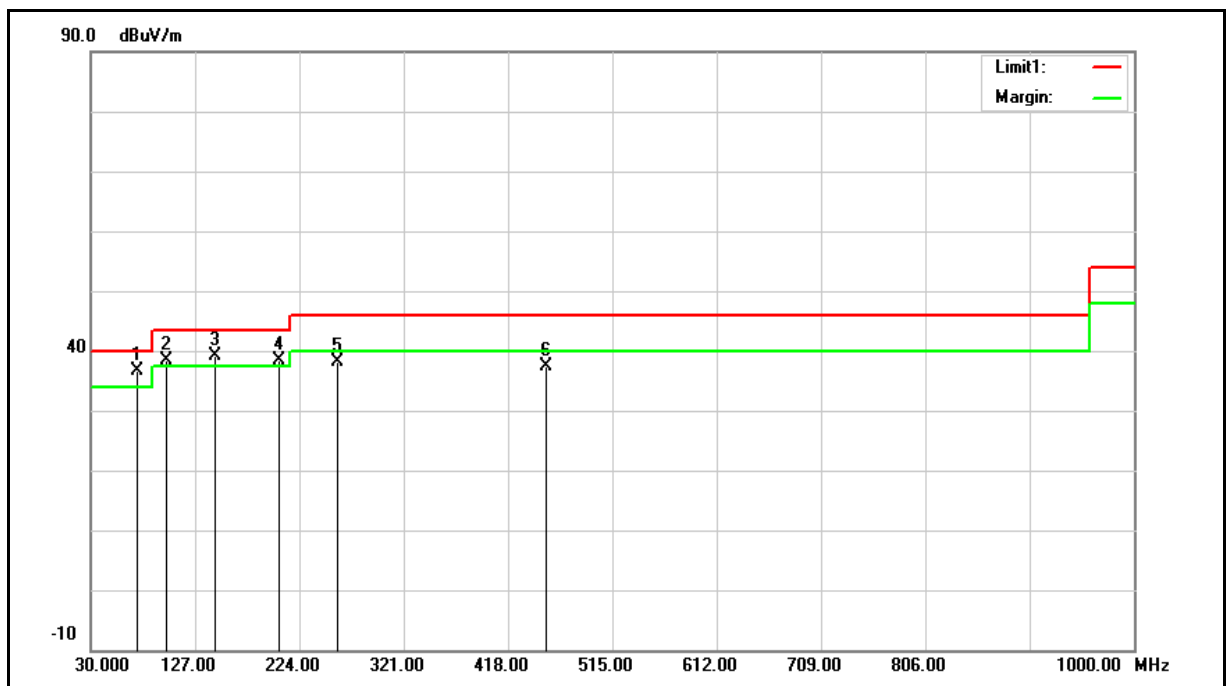

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	72.6800	45.85	-9.29	36.56	40.00	-3.44	QP
2	99.8400	49.50	-11.09	38.41	43.50	-5.09	QP
3	145.4300	45.13	-6.11	39.02	43.50	-4.48	QP
4	205.5700	46.34	-7.89	38.45	43.50	-5.05	QP
5	258.9200	43.96	-5.79	38.17	46.00	-7.83	QP
6	453.8900	38.24	-0.91	37.33	46.00	-8.67	QP

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: $36.56 = -9.29 + 45.85$

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

場強輻射量側 (1 GHz 以上)

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.82 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

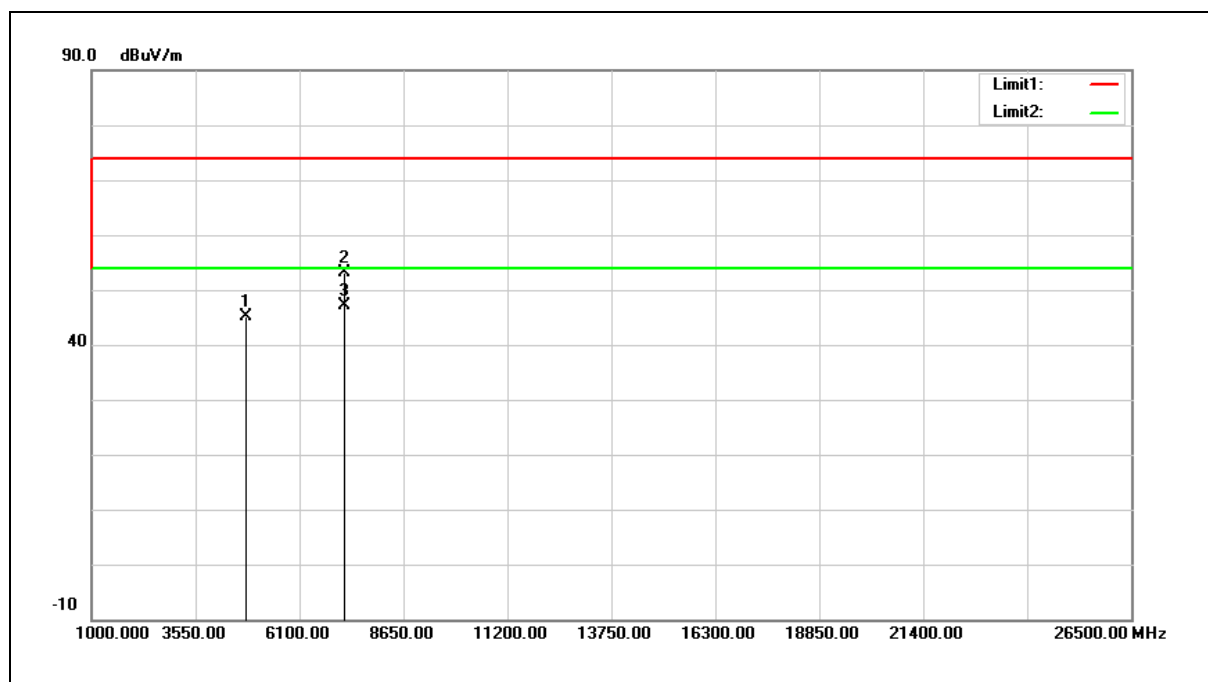

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	39.28	5.90	45.18	74.00	-28.82	peak
2	7206.000	40.94	12.16	53.10	74.00	-20.90	peak
3	7206.000	35.03	12.16	47.19	54.00	-6.81	AVG


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV)

Example: 45.18 = 5.90 + 39.28.

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.82 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

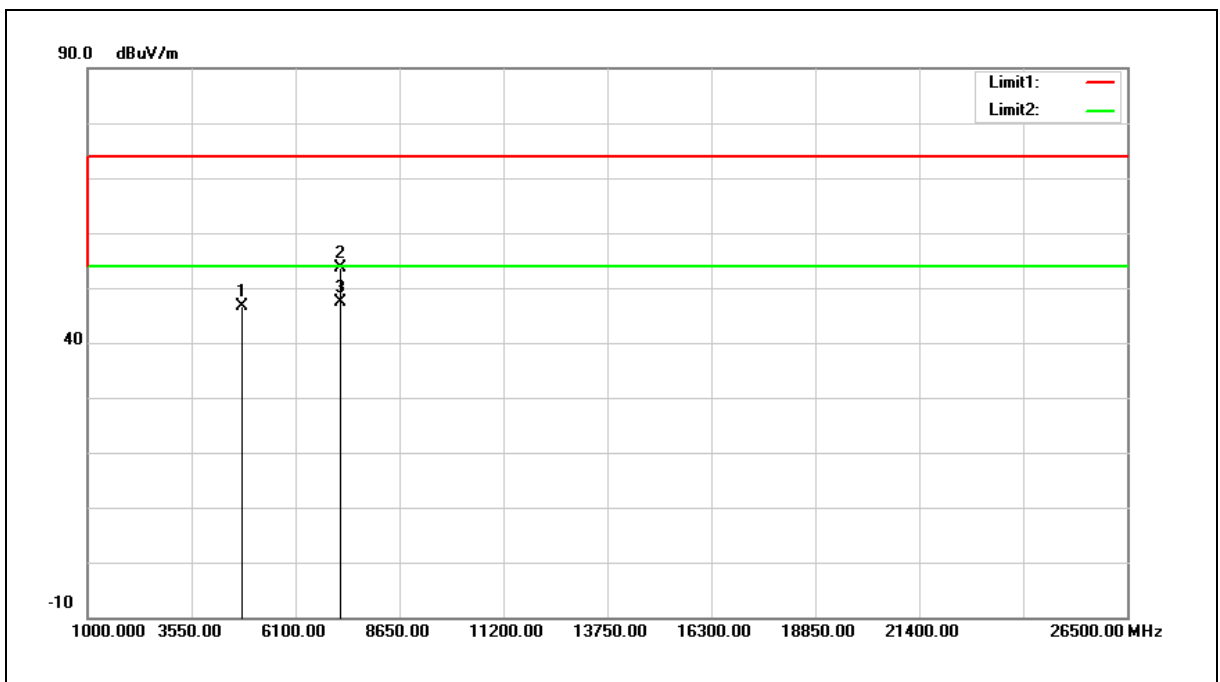

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	40.63	5.90	46.53	74.00	-27.47	peak
2	7206.000	41.44	12.16	53.60	74.00	-20.40	peak
3	7206.000	35.17	12.16	47.33	54.00	-6.67	AVG


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV)

Example: 46.53 = 5.90 + 40.63

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.82 V
Frequency:	2441 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

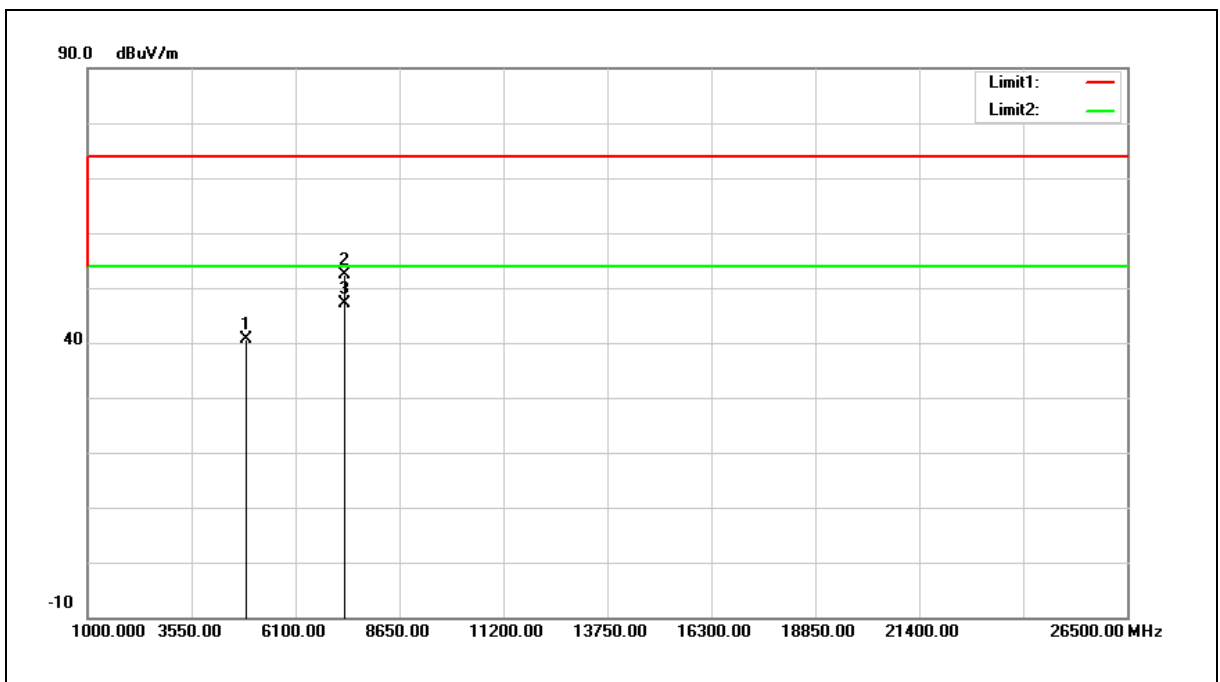


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	34.57	6.06	40.63	74.00	-33.37	peak
2	7323.000	39.94	12.42	52.36	74.00	-21.64	peak
3	7323.000	34.83	12.42	47.25	54.00	-6.75	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.82 V
Frequency:	2441 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

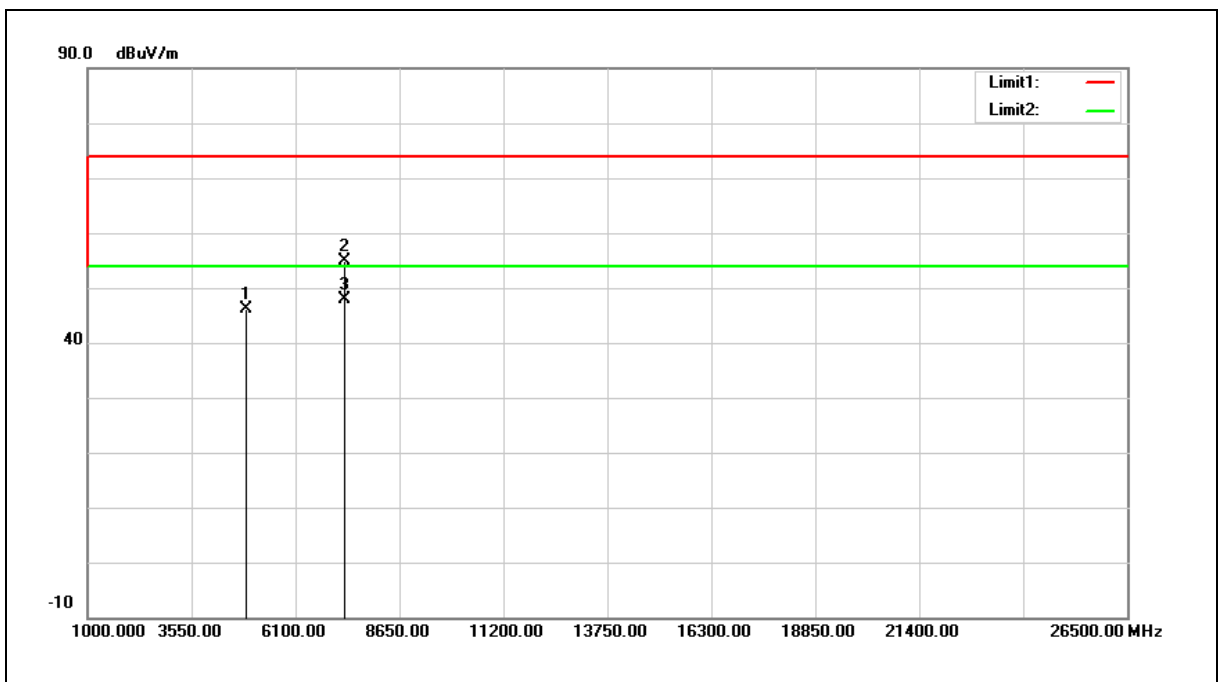


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	40.05	6.06	46.11	74.00	-27.89	peak
2	7323.000	42.44	12.42	54.86	74.00	-19.14	peak
3	7323.000	35.43	12.42	47.85	54.00	-6.15	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.82 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

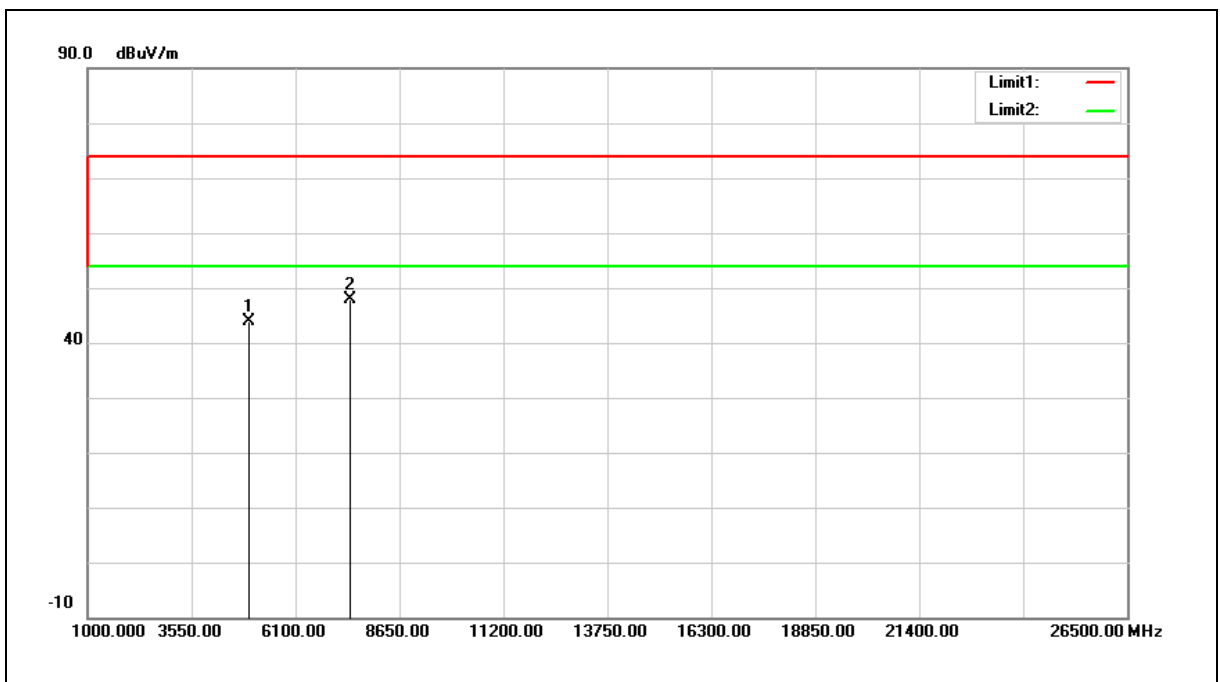


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	37.78	6.22	44.00	74.00	-30.00	peak
2	7440.000	35.32	12.68	48.00	74.00	-26.00	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.82 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

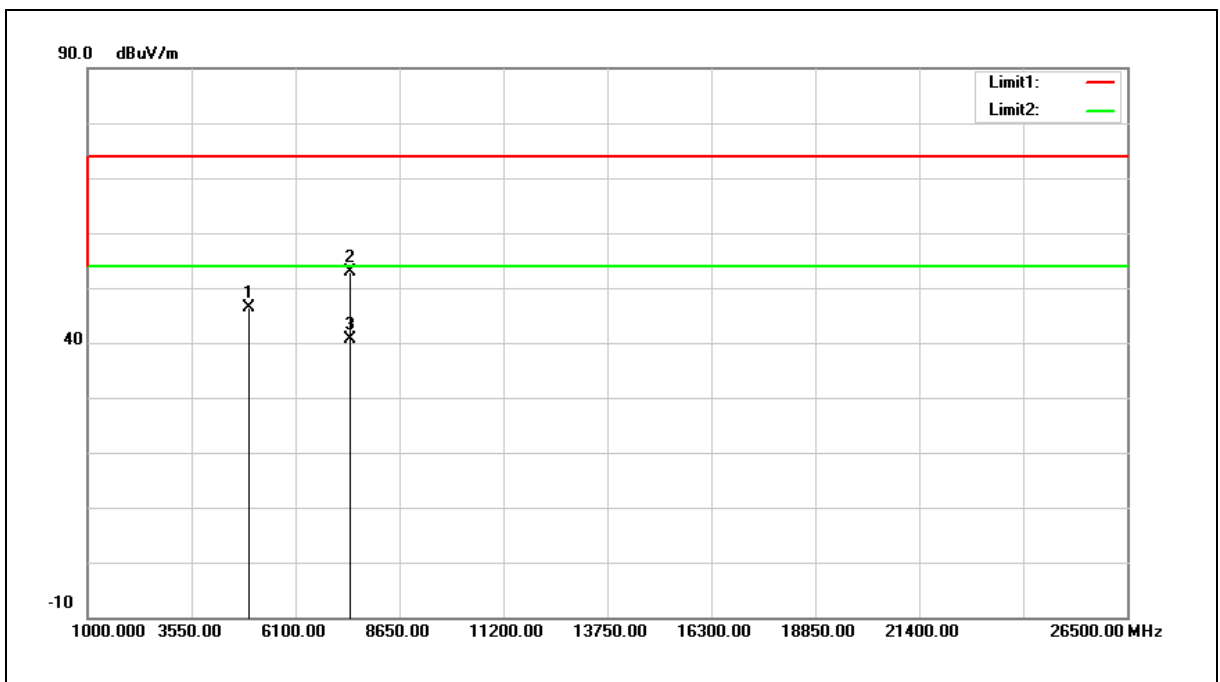


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	40.21	6.22	46.43	74.00	-27.57	peak
2	7440.000	40.24	12.68	52.92	74.00	-21.08	peak
3	7440.000	27.91	12.68	40.59	54.00	-13.41	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.82 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

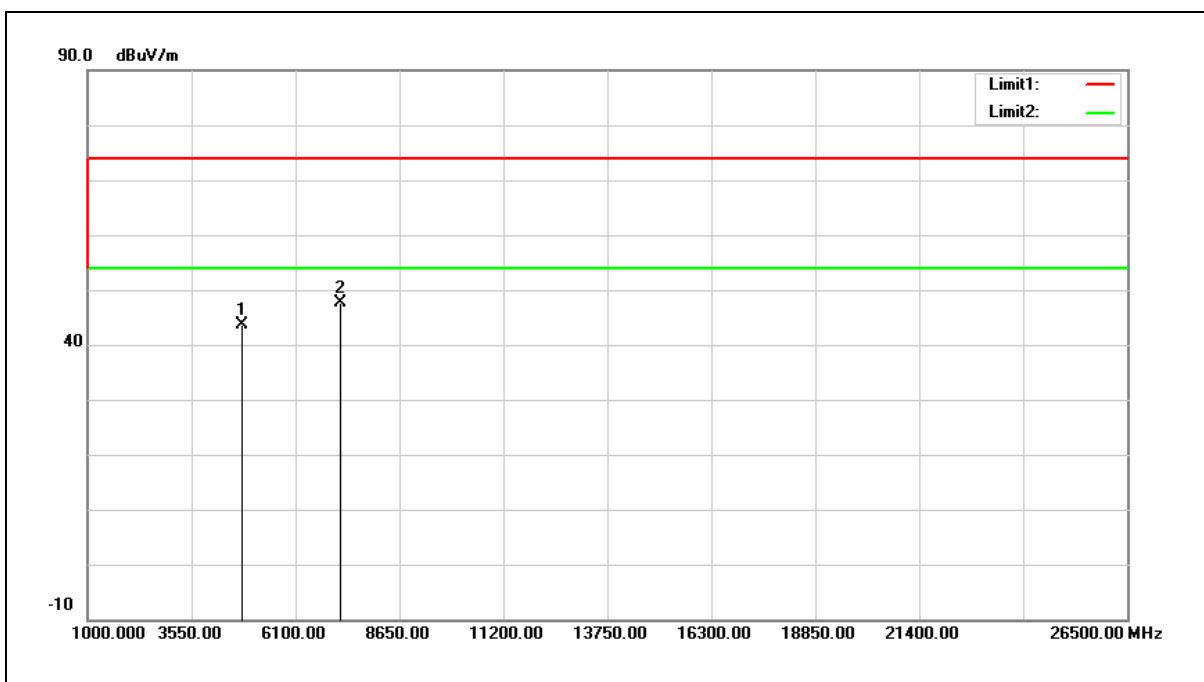


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	37.81	5.90	43.71	74.00	-30.29	peak
2	7206.000	35.45	12.16	47.61	74.00	-26.39	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.82 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

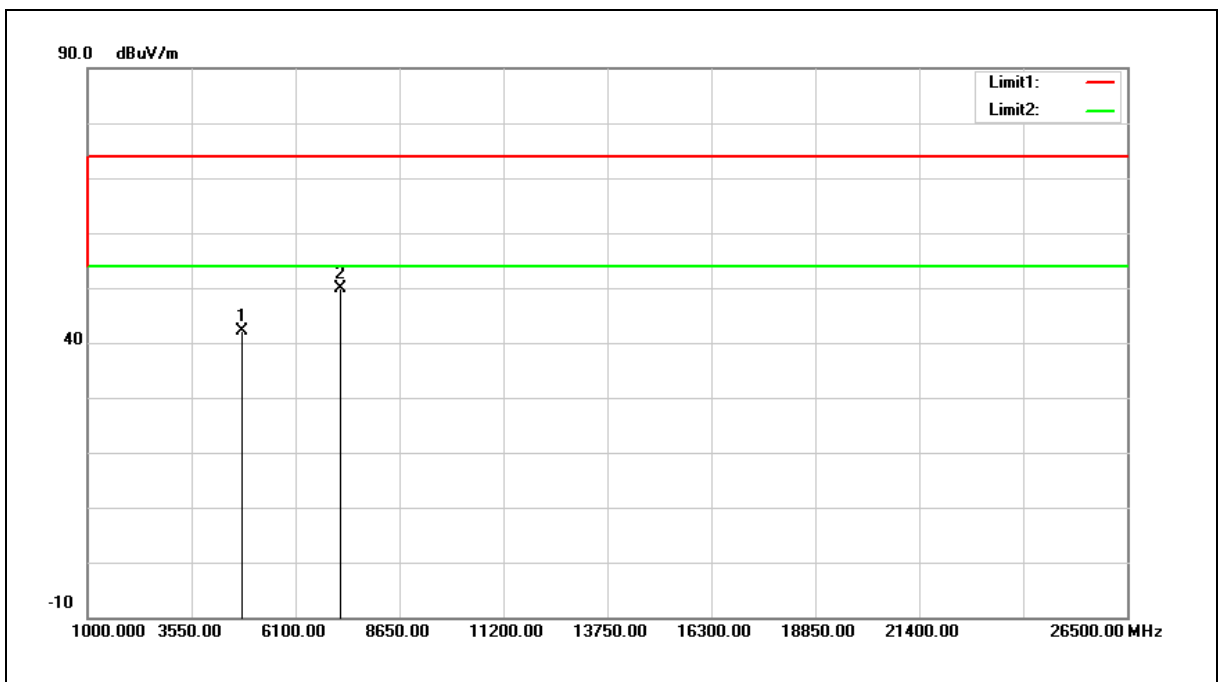


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	36.14	5.90	42.04	74.00	-31.96	peak
2	7206.000	37.78	12.16	49.94	74.00	-24.06	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.82 V
Frequency:	2441 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

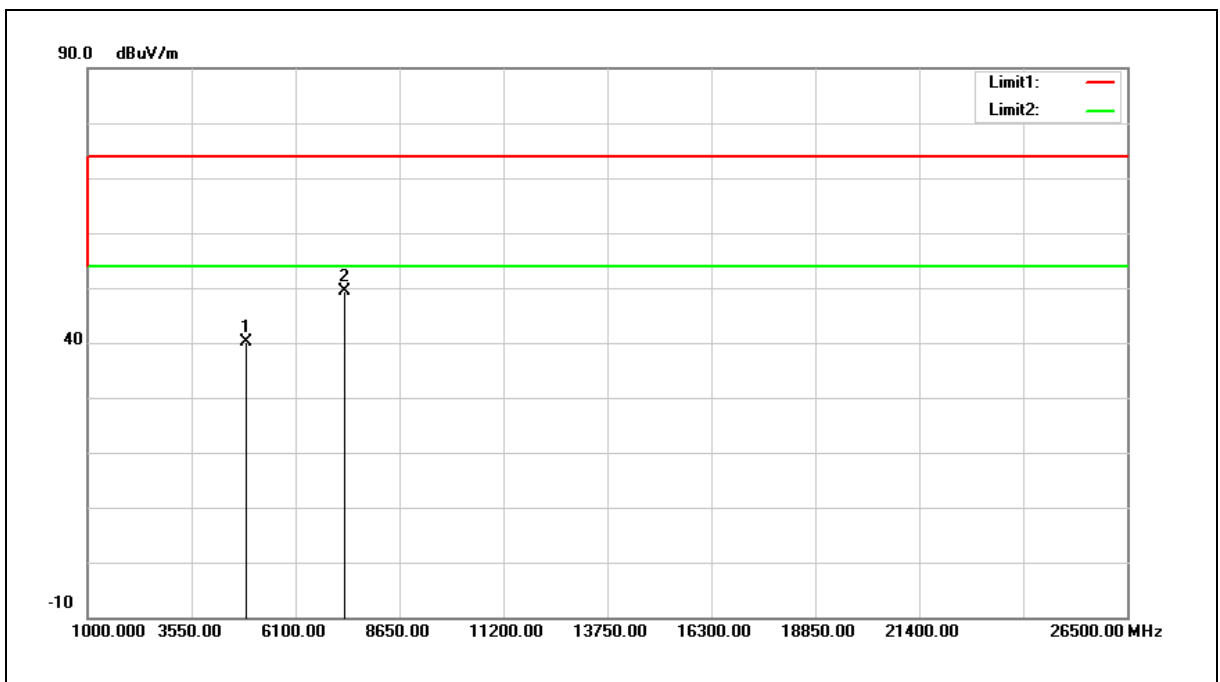


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	34.14	6.06	40.20	74.00	-33.80	peak
2	7323.000	36.86	12.42	49.28	74.00	-24.72	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.82 V
Frequency:	2441 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

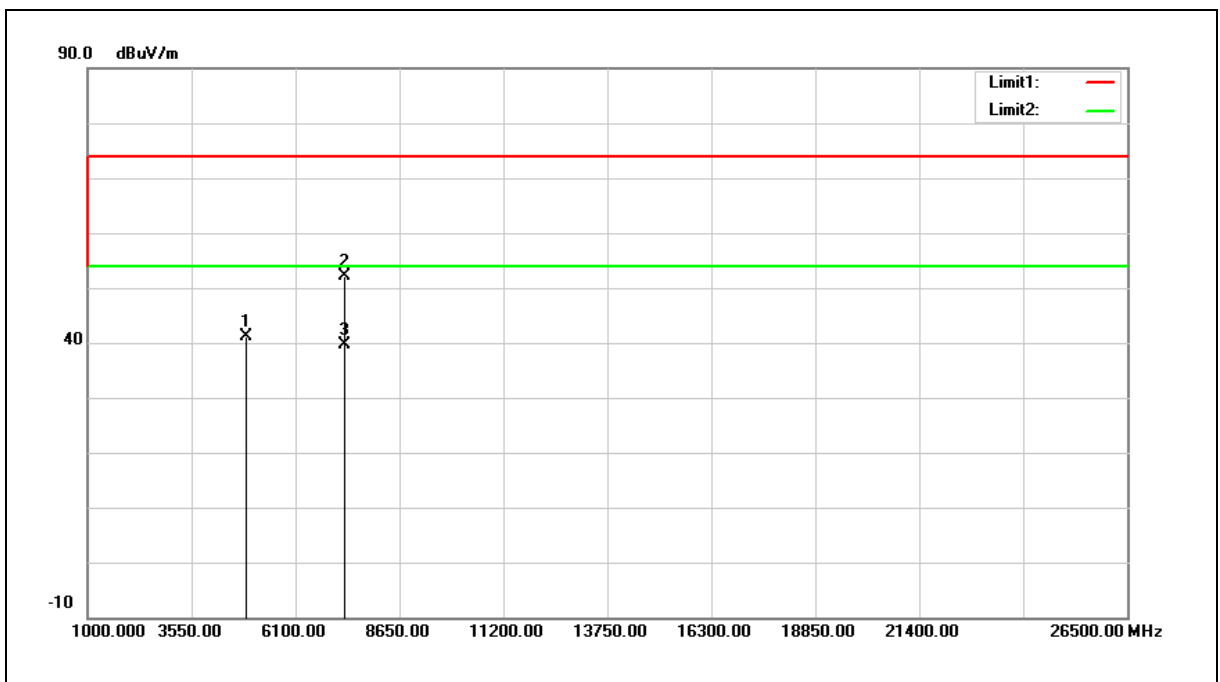


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	34.99	6.06	41.05	74.00	-32.95	peak
2	7323.000	39.76	12.42	52.18	74.00	-21.82	peak
3	7323.000	27.19	12.42	39.61	54.00	-14.39	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.82 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

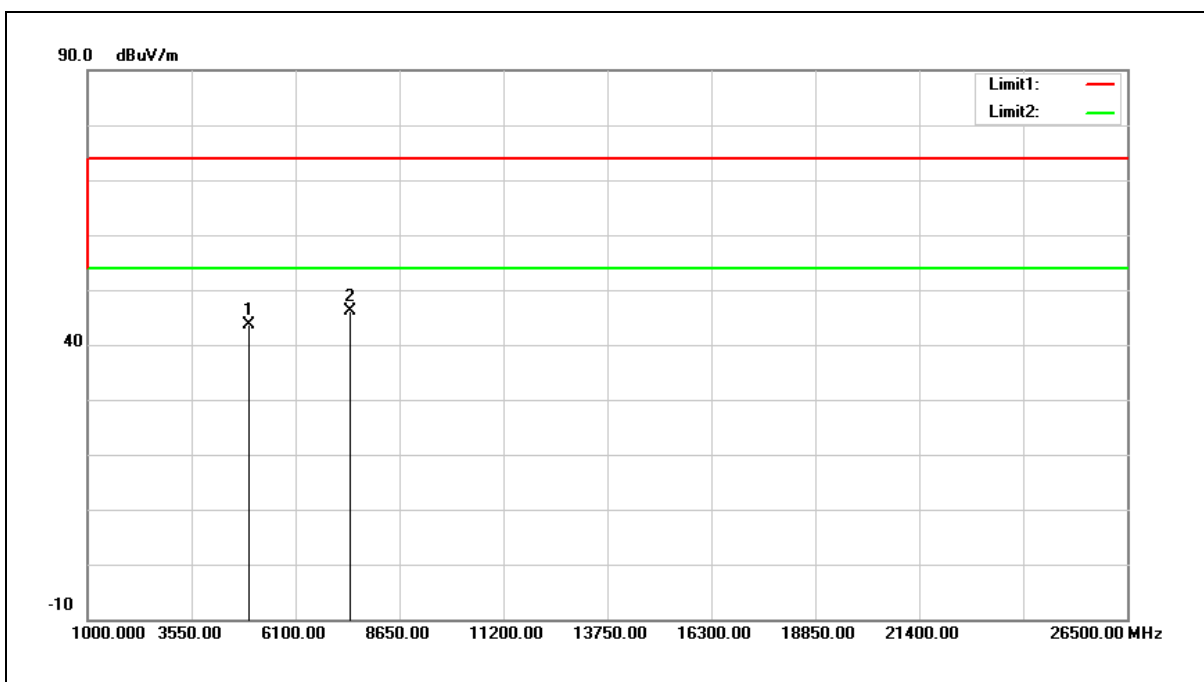


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	37.43	6.22	43.65	74.00	-30.35	peak
2	7440.000	33.54	12.68	46.22	74.00	-27.78	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.82 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

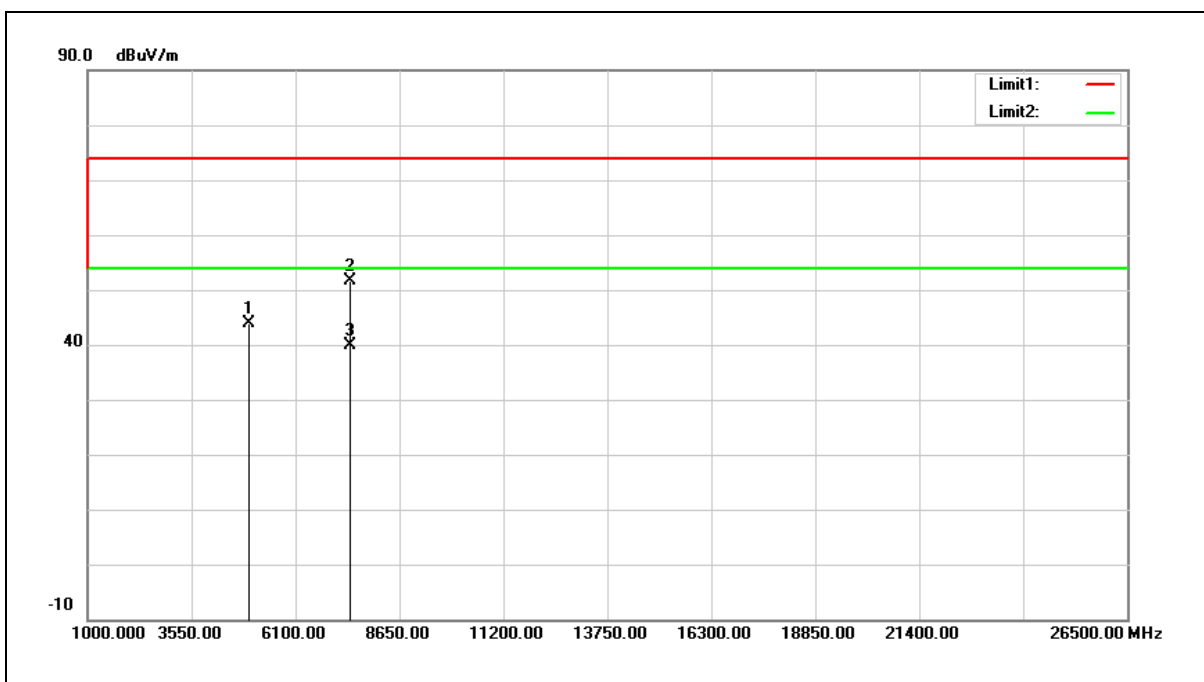


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	37.55	6.22	43.77	74.00	-30.23	peak
2	7440.000	38.93	12.68	51.61	74.00	-22.39	peak
3	7440.000	27.21	12.68	39.89	54.00	-14.11	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.82 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

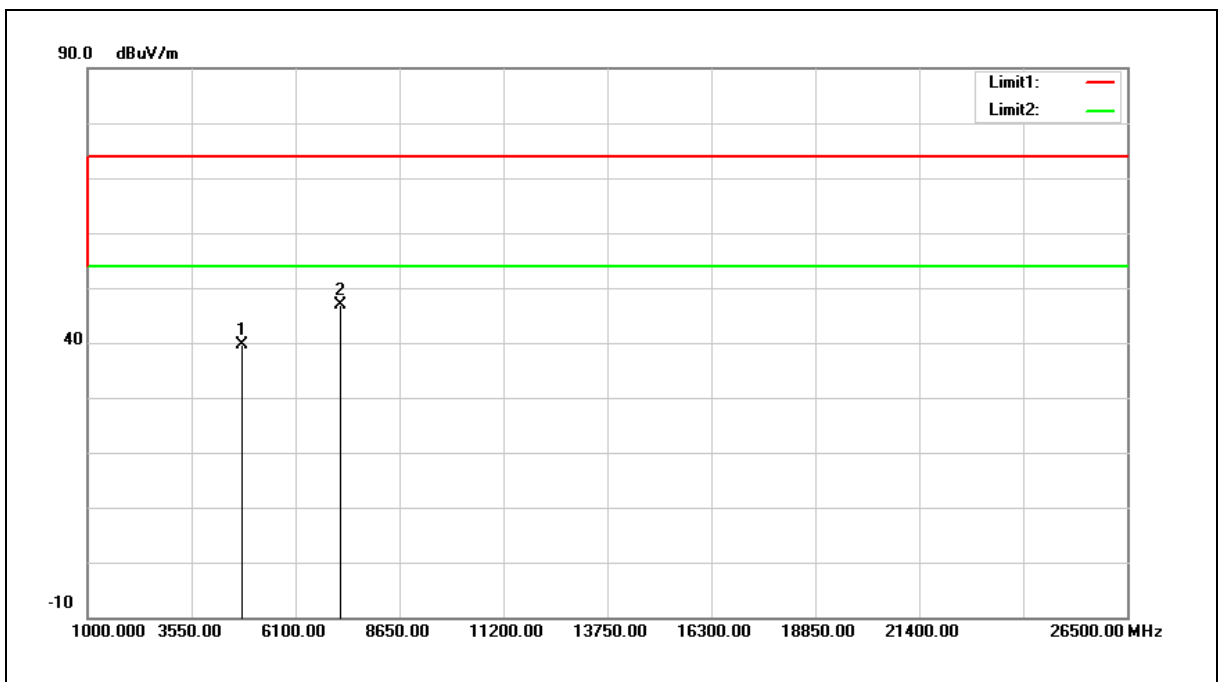


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	33.78	5.90	39.68	74.00	-34.32	peak
2	7206.000	34.60	12.16	46.76	74.00	-27.24	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.82 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

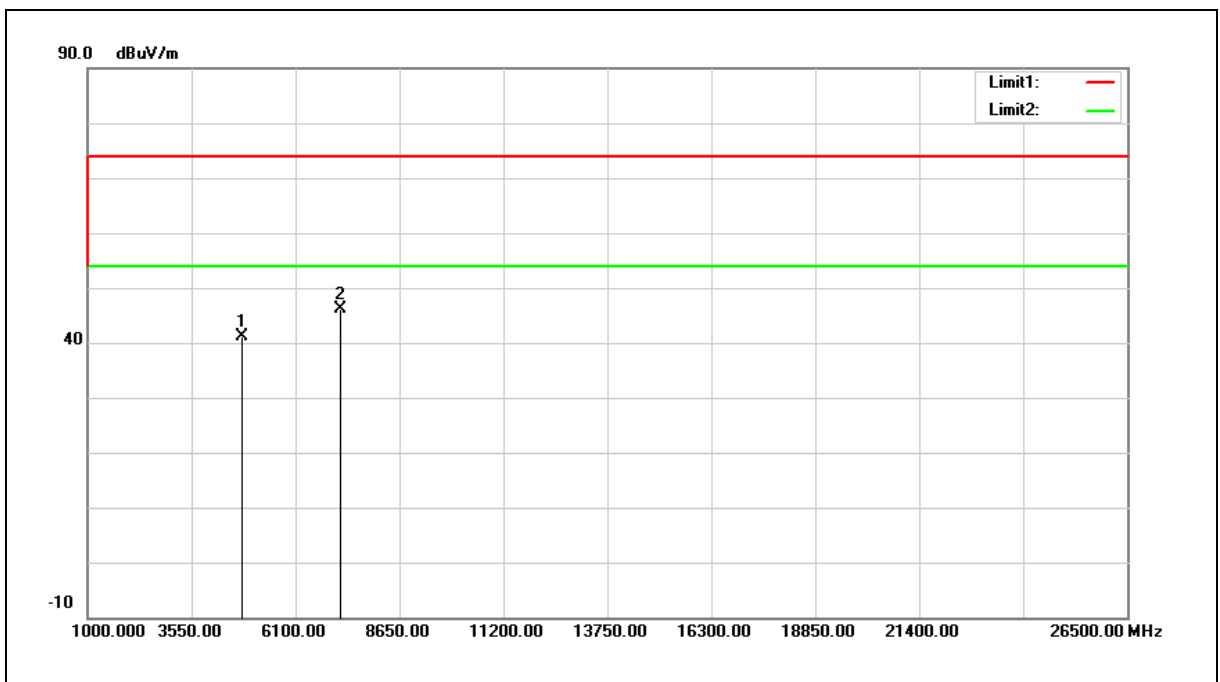


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	35.12	5.90	41.02	74.00	-32.98	peak
2	7206.000	34.01	12.16	46.17	74.00	-27.83	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.82 V
Frequency:	2440 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

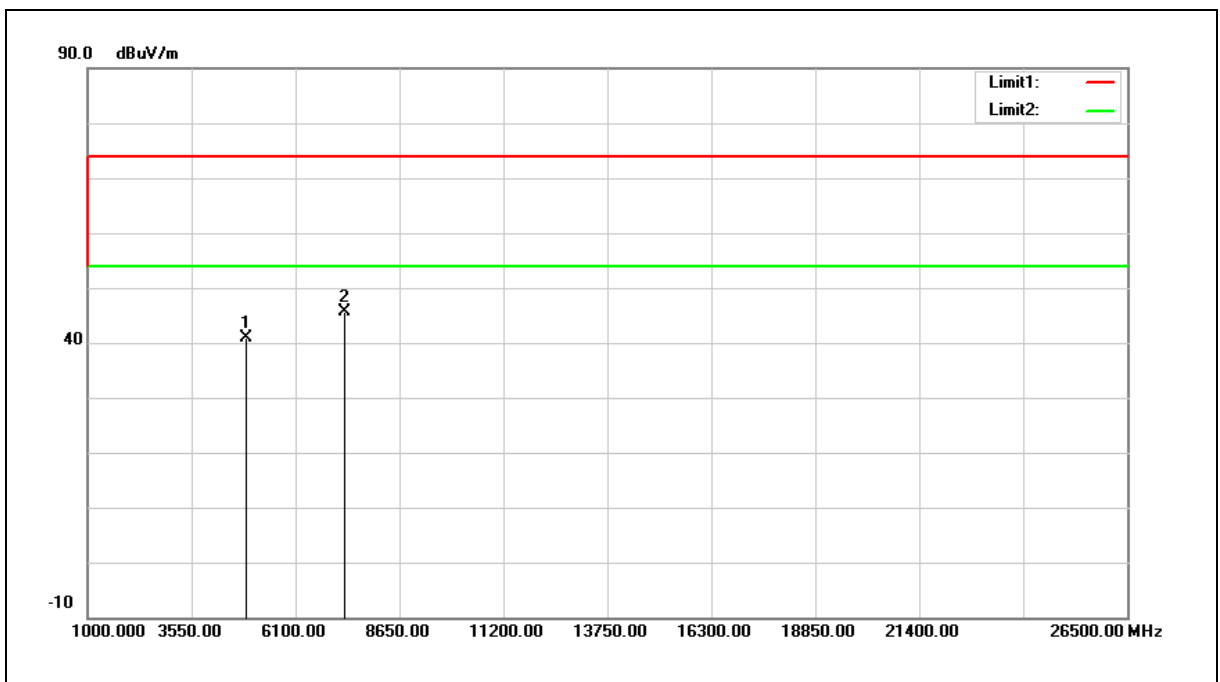


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	34.85	6.06	40.91	74.00	-33.09	peak
2	7320.000	33.32	12.41	45.73	74.00	-28.27	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.82 V
Frequency:	2440 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

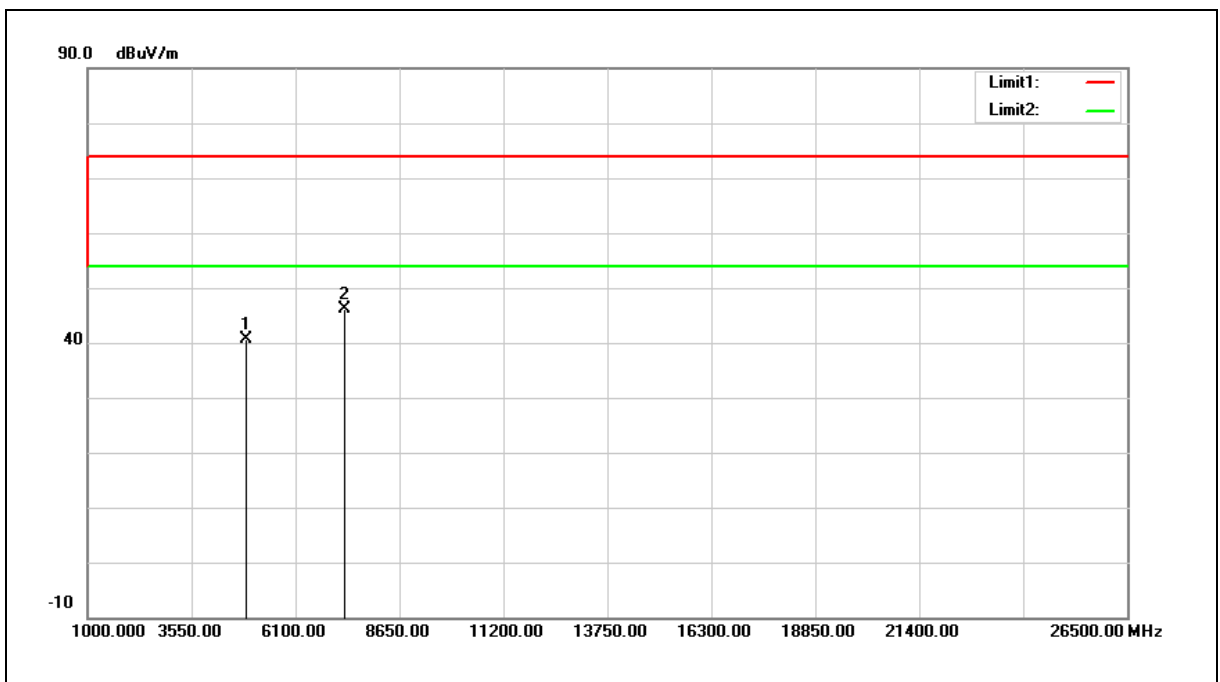


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	34.66	6.06	40.72	74.00	-33.28	peak
2	7320.000	33.69	12.41	46.10	74.00	-27.90	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.82 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

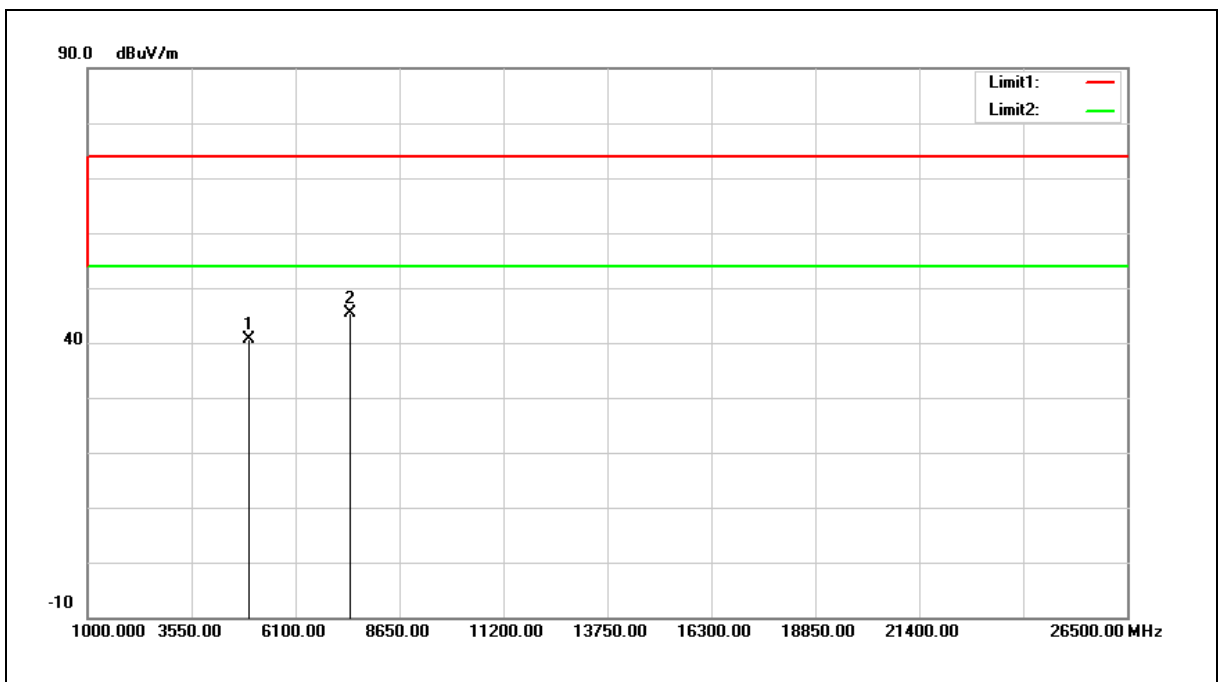


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	34.41	6.22	40.63	74.00	-33.37	peak
2	7440.000	32.80	12.68	45.48	74.00	-28.52	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.82 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

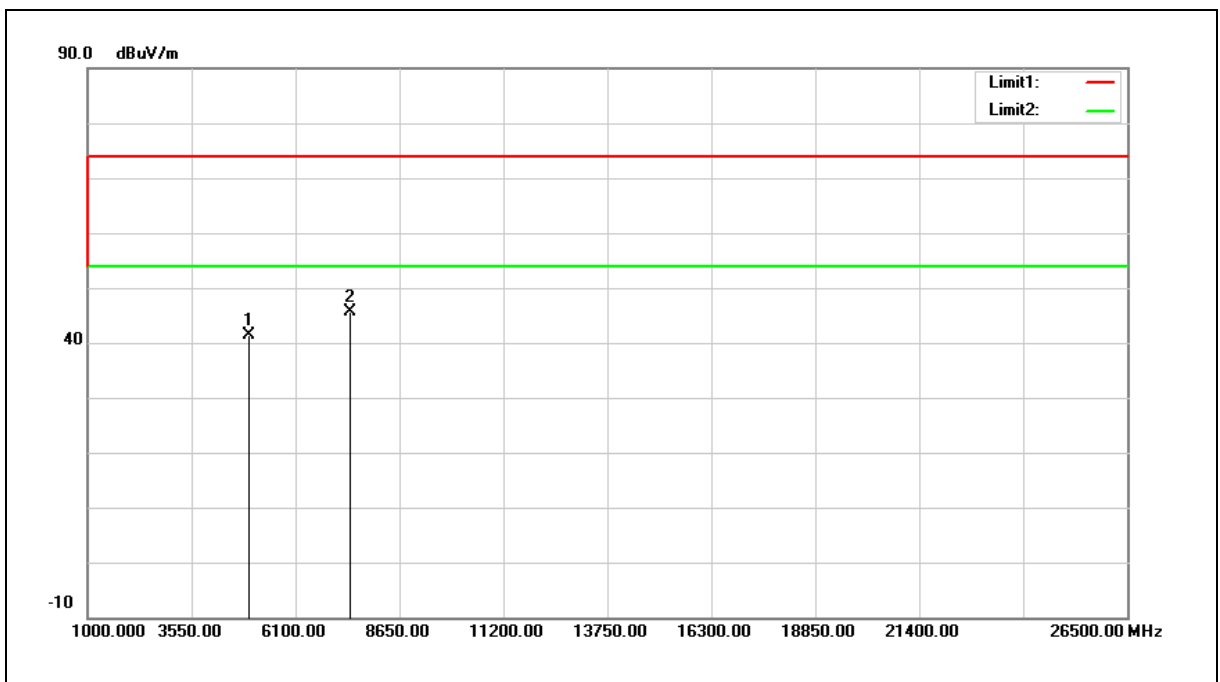


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	35.27	6.22	41.49	74.00	-32.51	peak
2	7440.000	32.99	12.68	45.67	74.00	-28.33	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.82 V
Mode:	Mode 6	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Ant.Polar.:	Horizontal		

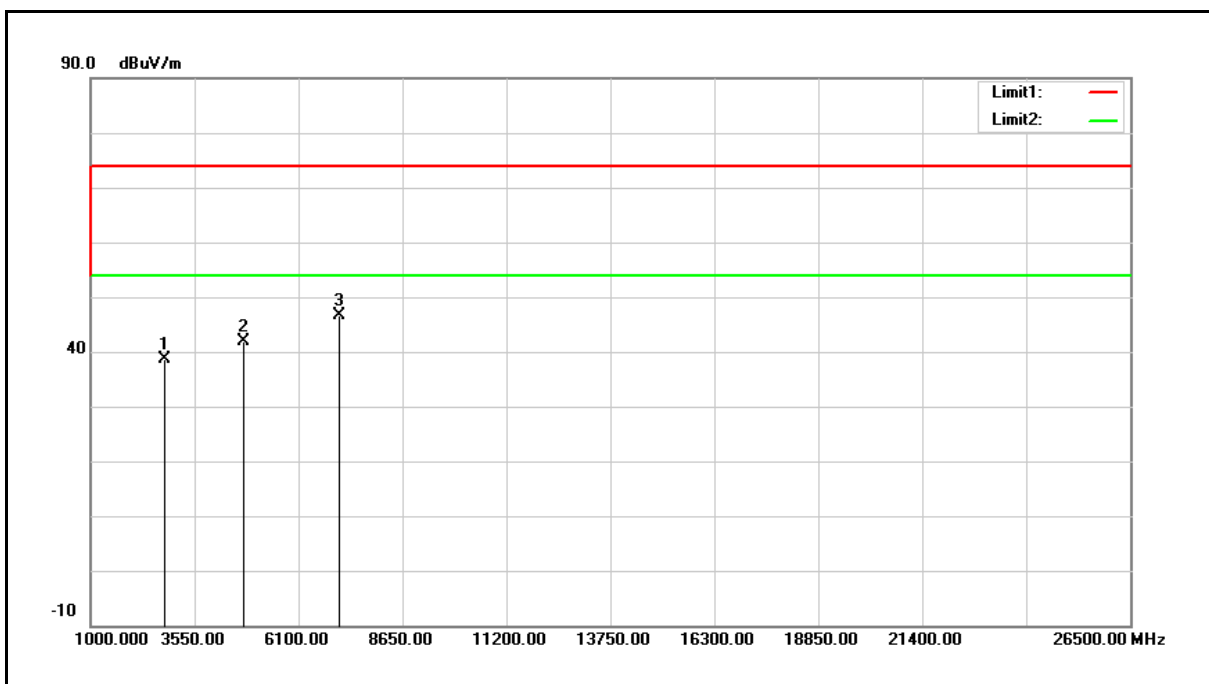


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2802.000	38.09	0.53	38.62	74.00	-35.38	peak
2	4740.000	36.17	5.76	41.93	74.00	-32.07	peak
3	7086.000	34.67	11.90	46.57	74.00	-27.43	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.82 V
Mode:	Mode 6	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Ant.Polar.:	Vertical		

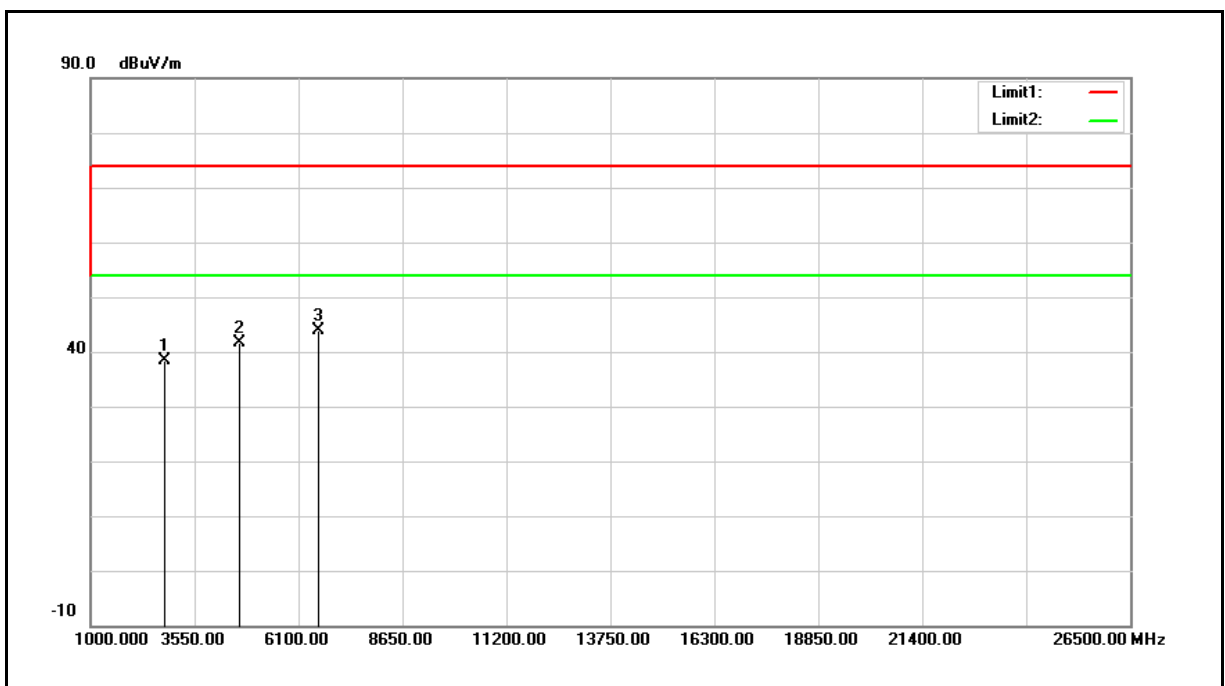

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2802.000	37.78	0.53	38.31	74.00	-35.69	peak
2	4638.000	36.02	5.55	41.57	74.00	-32.43	peak
3	6576.000	33.11	10.74	43.85	74.00	-30.15	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).


2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

頻帶邊緣

附註：其上下邊緣落於低功率射頻電機第 2.7 節所列頻帶內之混附發射，其電場強度必須符合第 2.8 節的限制規定。

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.82 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

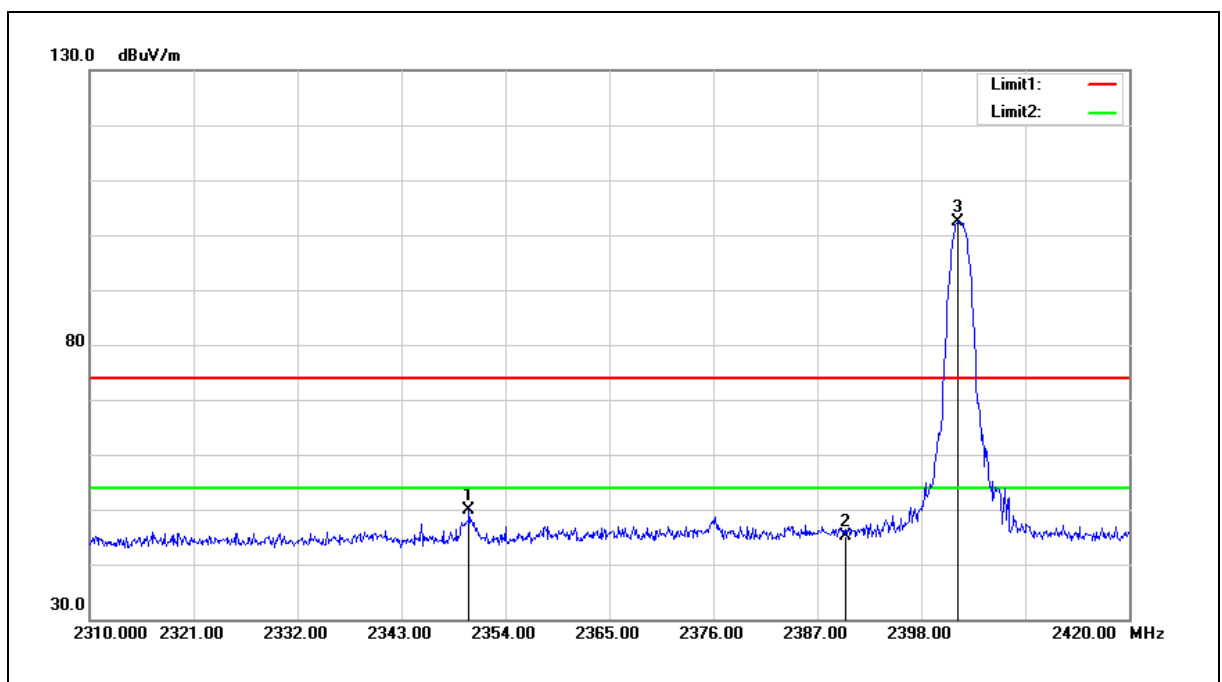


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2350.150	51.03	-1.21	49.82	74.00	-24.18	peak
2	2390.000	46.24	-1.03	45.21	74.00	-28.79	peak
3	2401.850	103.24	-0.98	102.26	--	--	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.82 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

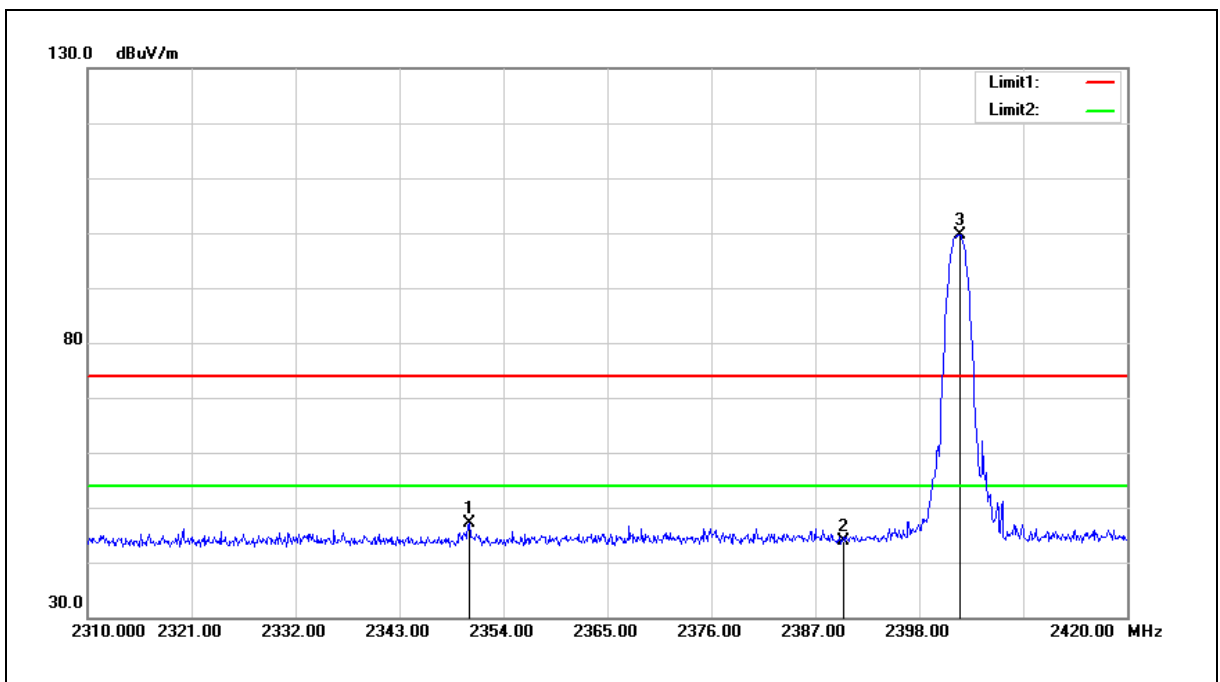


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2350.370	48.30	-1.21	47.09	74.00	-26.91	peak
2	2390.000	44.99	-1.03	43.96	74.00	-30.04	peak
3	2402.290	100.57	-0.98	99.59	--	--	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.82 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

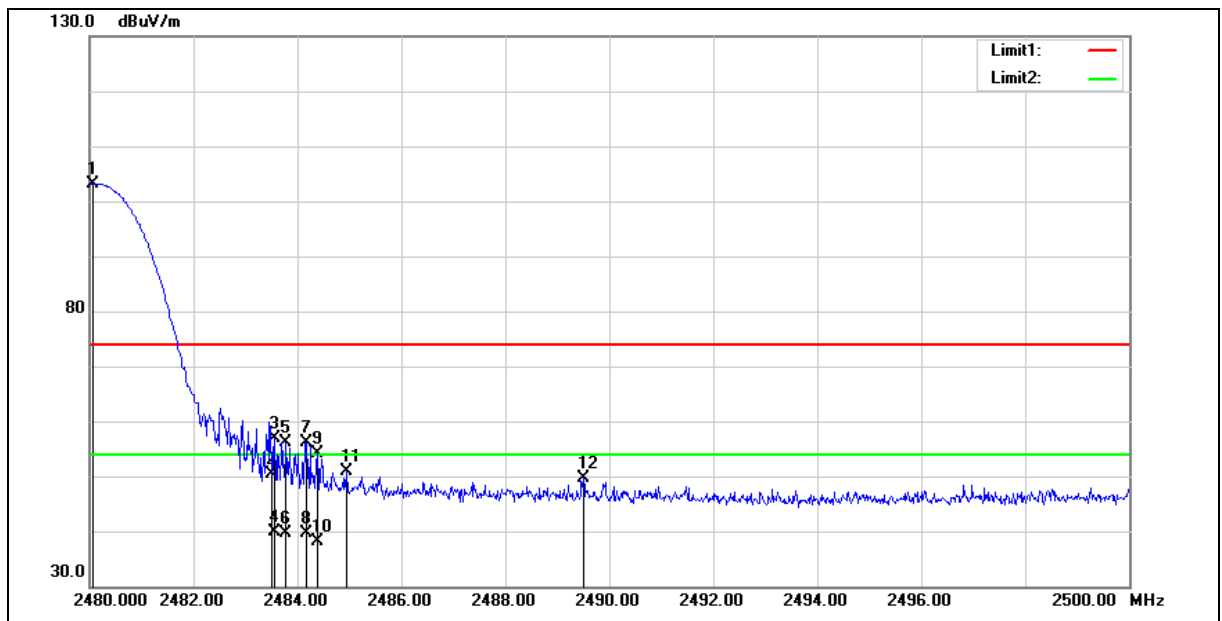

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.82 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.060	103.85	-0.63	103.22	--	--	peak
2	2483.500	51.05	-0.62	50.43	74.00	-23.57	peak
3	2483.560	57.60	-0.62	56.98	74.00	-17.02	peak
4	2483.560	40.50	-0.62	39.88	54.00	-14.12	AVG
5	2483.780	56.71	-0.62	56.09	74.00	-17.91	peak
6	2483.780	40.33	-0.62	39.71	54.00	-14.29	AVG
7	2484.160	56.80	-0.61	56.19	74.00	-17.81	peak
8	2484.160	40.22	-0.61	39.61	54.00	-14.39	AVG
9	2484.380	54.82	-0.61	54.21	74.00	-19.79	peak
10	2484.380	38.81	-0.61	38.20	54.00	-15.80	AVG
11	2484.940	51.39	-0.61	50.78	74.00	-23.22	peak
12	2489.500	50.32	-0.59	49.73	74.00	-24.27	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.82 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

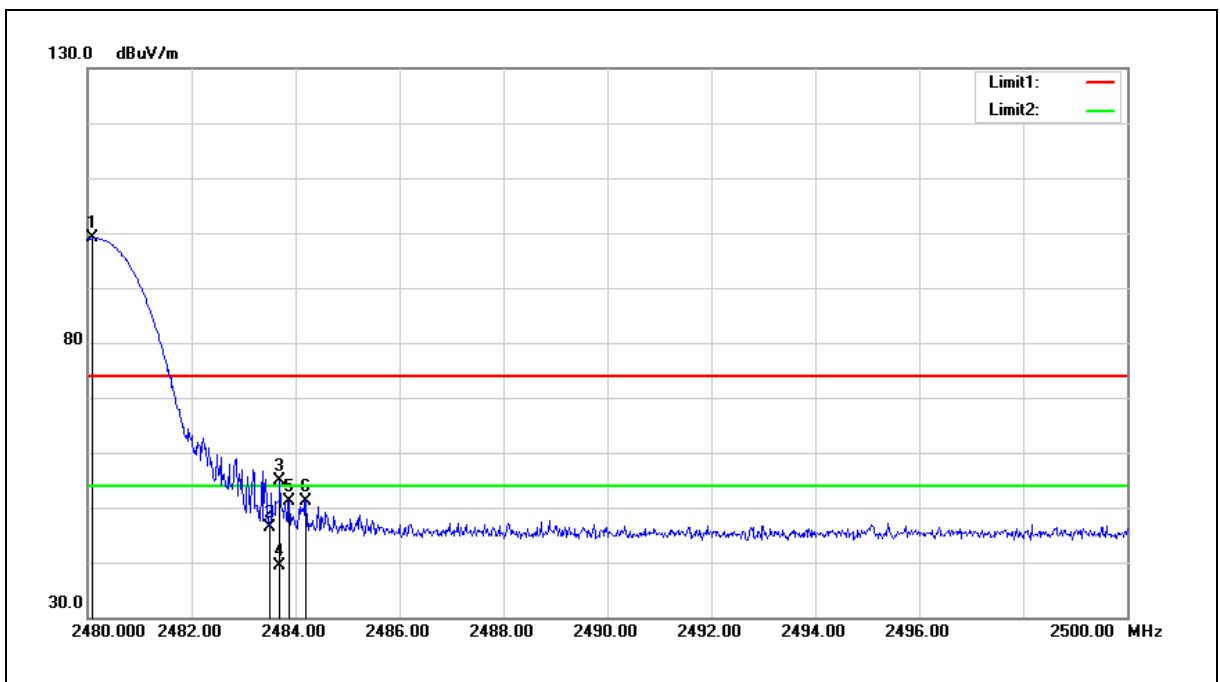


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.100	99.69	-0.63	99.06	--	--	peak
2	2483.500	47.10	-0.62	46.48	74.00	-27.52	peak
3	2483.700	55.40	-0.62	54.78	74.00	-19.22	peak
4	2483.700	39.93	-0.62	39.31	54.00	-14.69	AVG
5	2483.880	51.80	-0.61	51.19	74.00	-22.81	peak
6	2484.200	51.86	-0.61	51.25	74.00	-22.75	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.82 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

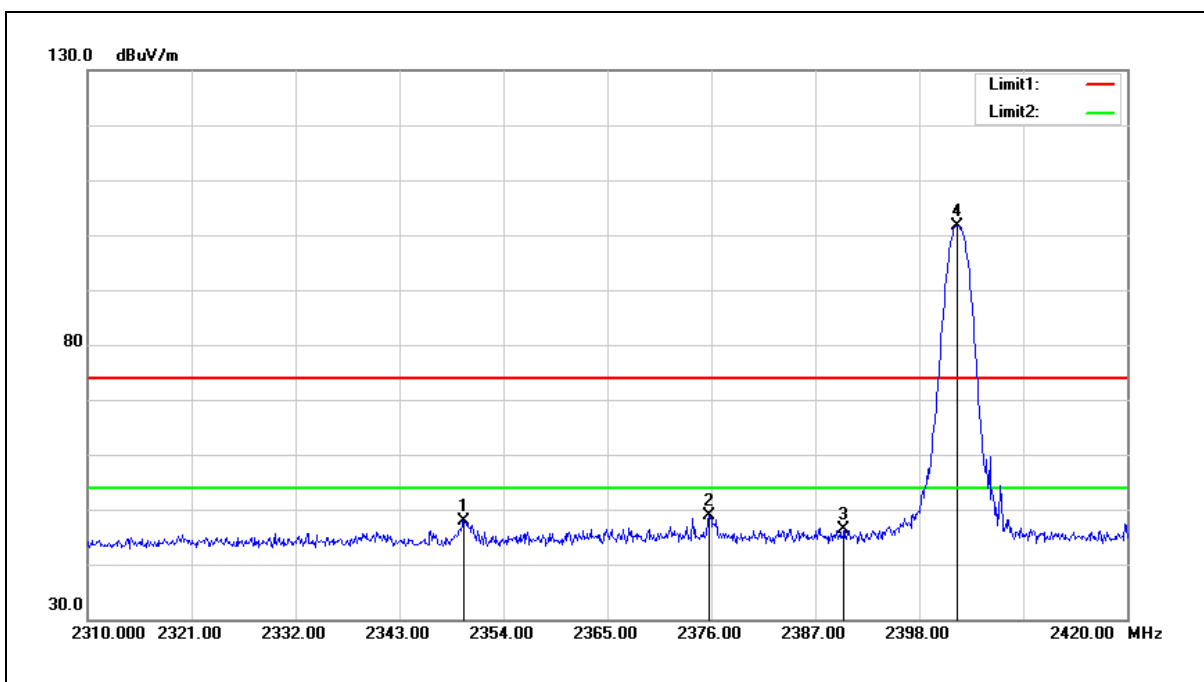


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2349.820	49.12	-1.21	47.91	74.00	-26.09	peak
2	2375.780	49.92	-1.10	48.82	74.00	-25.18	peak
3	2390.000	47.41	-1.03	46.38	74.00	-27.62	peak
4	2401.960	102.64	-0.98	101.66	--	--	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.82 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

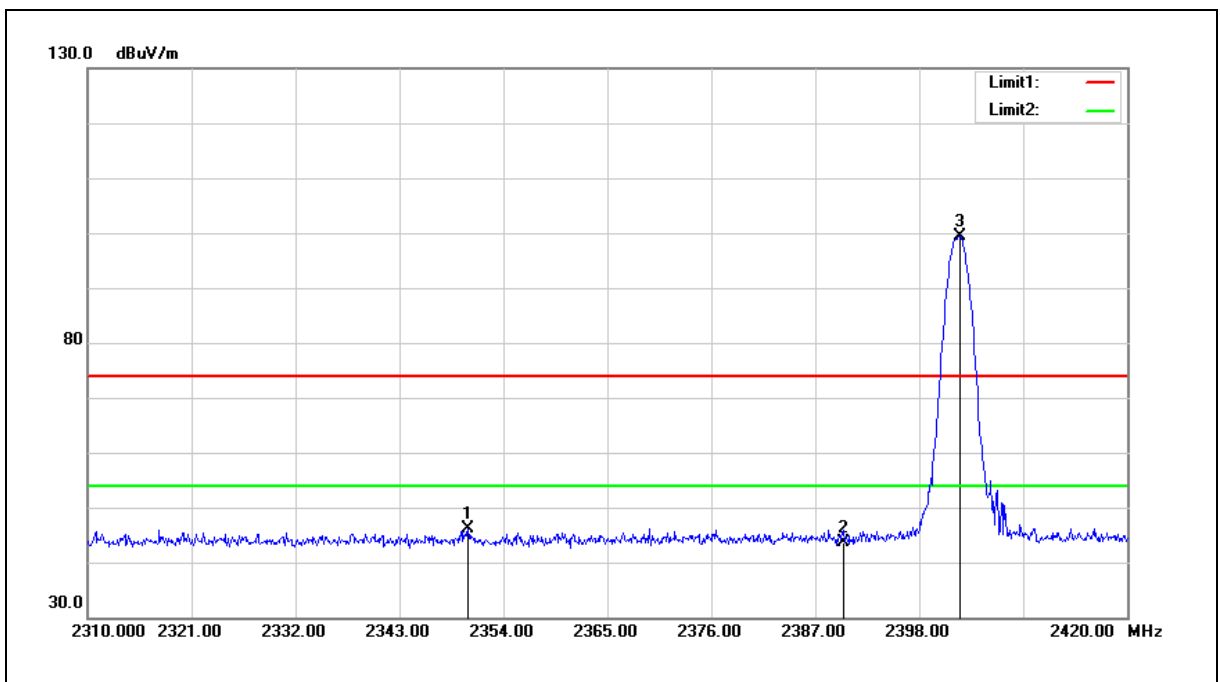


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2350.260	47.32	-1.21	46.11	74.00	-27.89	peak
2	2390.000	44.68	-1.03	43.65	74.00	-30.35	peak
3	2402.290	100.39	-0.98	99.41	--	--	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.82 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

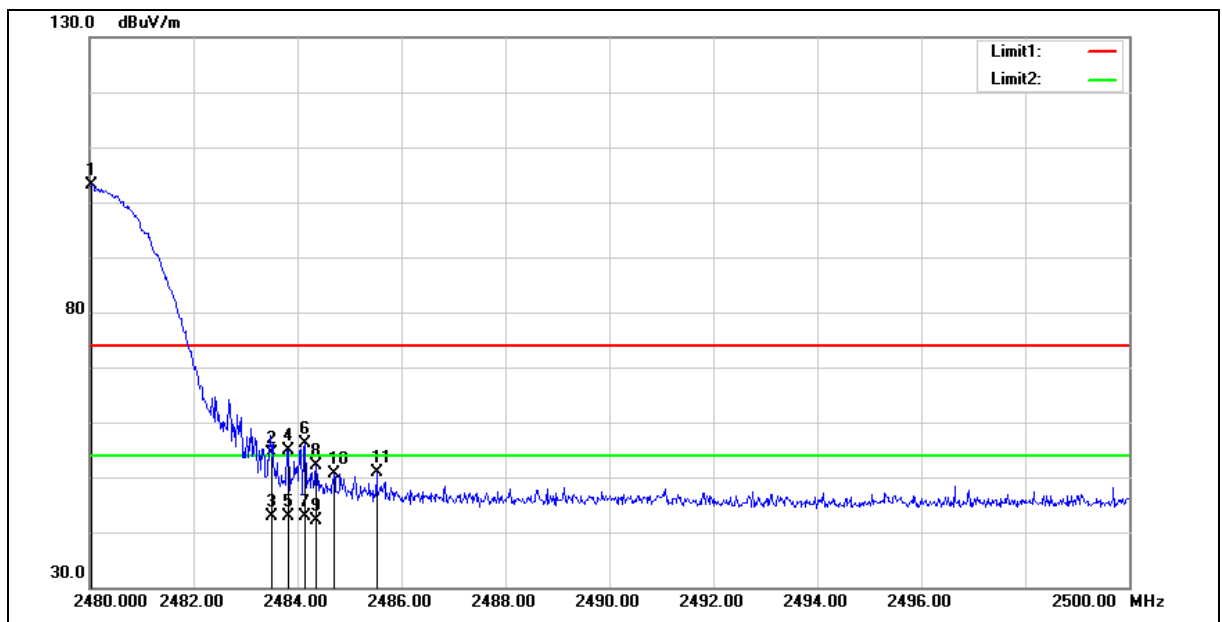

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.82 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.040	103.74	-0.63	103.11	--	--	peak
2	2483.500	54.92	-0.62	54.30	74.00	-19.70	peak
3	2483.500	43.59	-0.62	42.97	54.00	-11.03	AVG
4	2483.820	55.53	-0.62	54.91	74.00	-19.09	peak
5	2483.820	43.41	-0.62	42.79	54.00	-11.21	AVG
6	2484.140	56.69	-0.61	56.08	74.00	-17.92	peak
7	2484.140	43.43	-0.61	42.82	54.00	-11.18	AVG
8	2484.360	52.84	-0.61	52.23	74.00	-21.77	peak
9	2484.360	42.84	-0.61	42.23	54.00	-11.77	AVG
10	2484.700	51.36	-0.61	50.75	74.00	-23.25	peak
11	2485.520	51.60	-0.61	50.99	74.00	-23.01	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.82 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

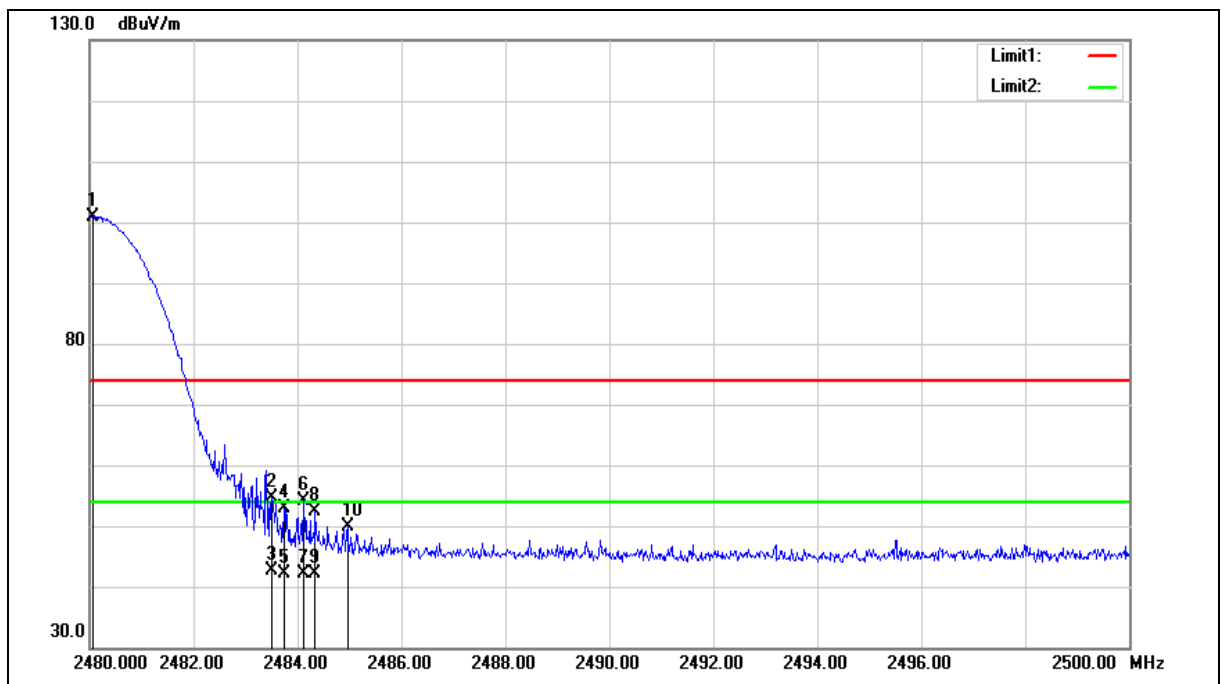

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.82 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.060	101.60	-0.63	100.97	--	--	peak
2	2483.500	55.24	-0.62	54.62	74.00	-19.38	peak
3	2483.500	43.15	-0.62	42.53	54.00	-11.47	AVG
4	2483.740	53.43	-0.62	52.81	74.00	-21.19	peak
5	2483.740	42.82	-0.62	42.20	54.00	-11.80	AVG
6	2484.120	54.63	-0.61	54.02	74.00	-19.98	peak
7	2484.120	42.70	-0.61	42.09	54.00	-11.91	AVG
8	2484.340	53.10	-0.61	52.49	74.00	-21.51	peak
9	2484.340	42.72	-0.61	42.11	54.00	-11.89	AVG
10	2484.960	50.44	-0.61	49.83	74.00	-24.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.82 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

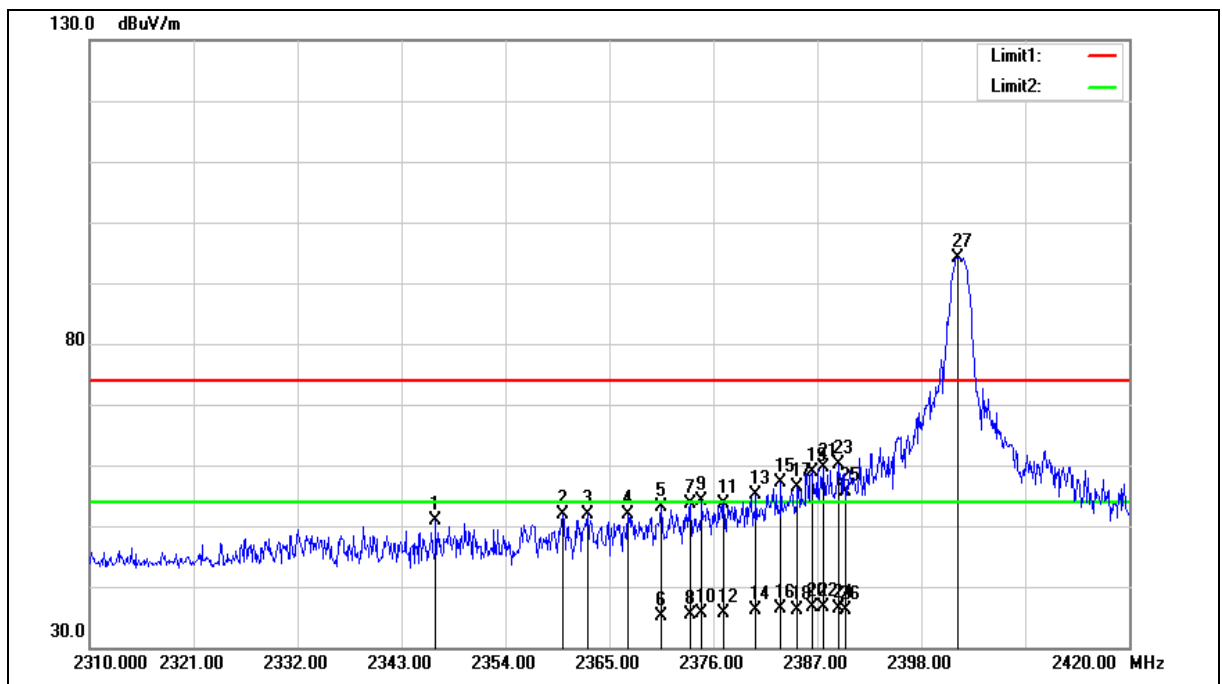

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.82 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2346.630	52.00	-1.22	50.78	74.00	-23.22	peak
2	2360.050	53.03	-1.17	51.86	74.00	-22.14	peak
3	2362.690	53.13	-1.15	51.98	74.00	-22.02	peak
4	2366.980	53.02	-1.13	51.89	74.00	-22.11	peak
5	2370.500	54.22	-1.12	53.10	74.00	-20.90	peak
6	2370.500	36.16	-1.12	35.04	54.00	-18.96	AVG
7	2373.580	54.69	-1.10	53.59	74.00	-20.41	peak
8	2373.580	36.60	-1.10	35.50	54.00	-18.50	AVG
9	2374.790	55.29	-1.10	54.19	74.00	-19.81	peak
10	2374.790	36.77	-1.10	35.67	54.00	-18.33	AVG
11	2377.100	54.85	-1.10	53.75	74.00	-20.25	peak
12	2377.100	36.65	-1.10	35.55	54.00	-18.45	AVG
13	2380.510	56.26	-1.08	55.18	74.00	-18.82	peak
14	2380.510	37.10	-1.08	36.02	54.00	-17.98	AVG
15	2383.150	58.21	-1.07	57.14	74.00	-16.86	peak
16	2383.150	37.51	-1.07	36.44	54.00	-17.56	AVG
17	2384.910	57.33	-1.06	56.27	74.00	-17.73	peak
18	2384.910	37.12	-1.06	36.06	54.00	-17.94	AVG
19	2386.450	59.89	-1.06	58.83	74.00	-15.17	peak
20	2386.450	37.71	-1.06	36.65	54.00	-17.35	AVG
21	2387.660	60.63	-1.04	59.59	74.00	-14.41	peak
22	2387.660	37.64	-1.04	36.60	54.00	-17.40	AVG
23	2389.200	61.13	-1.04	60.09	74.00	-13.91	peak
24	2389.200	37.41	-1.04	36.37	54.00	-17.63	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.82 V
Frequency:	2402 MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
25	2390.000	56.58	-1.03	55.55	74.00	-18.45	peak
26	2390.000	37.25	-1.03	36.22	54.00	-17.78	AVG
27	2401.850	95.06	-0.98	94.08	--	--	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.82 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

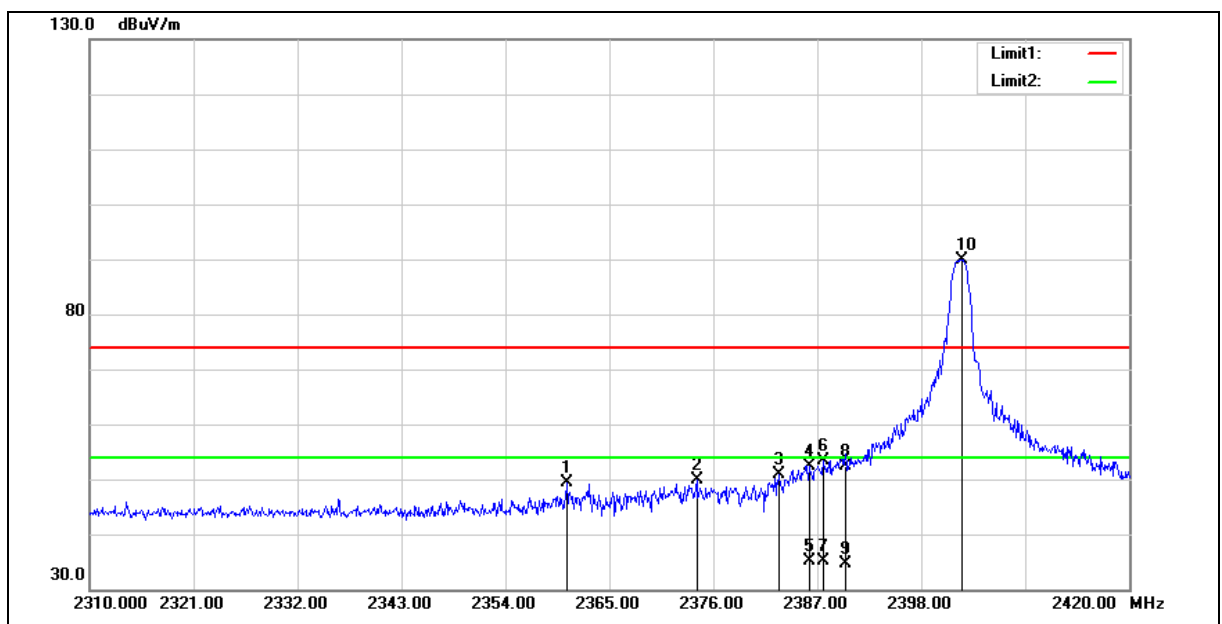


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2360.490	50.47	-1.16	49.31	74.00	-24.69	peak
2	2374.240	50.97	-1.10	49.87	74.00	-24.13	peak
3	2382.930	51.84	-1.07	50.77	74.00	-23.23	peak
4	2386.120	53.48	-1.06	52.42	74.00	-21.58	peak
5	2386.120	36.17	-1.06	35.11	54.00	-18.89	AVG
6	2387.660	54.42	-1.04	53.38	74.00	-20.62	peak
7	2387.660	36.24	-1.04	35.20	54.00	-18.80	AVG
8	2390.000	53.44	-1.03	52.41	74.00	-21.59	peak
9	2390.000	35.74	-1.03	34.71	54.00	-19.29	AVG
10	2402.290	90.82	-0.98	89.84	--	--	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.82 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

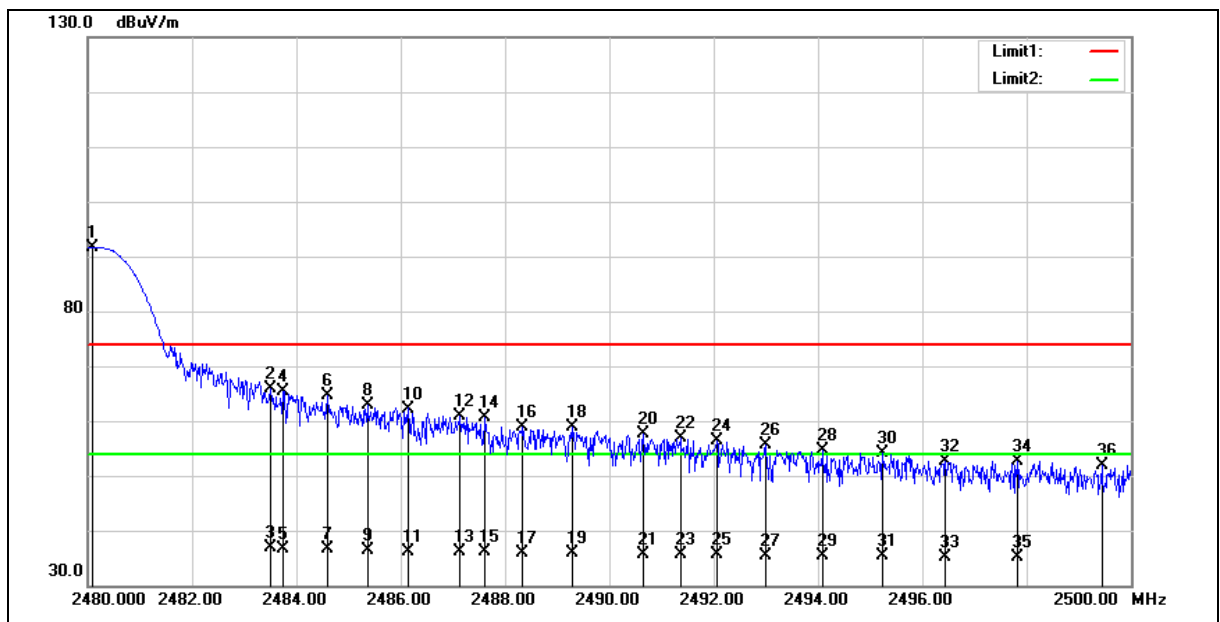

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.82 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.100	92.34	-0.63	91.71	--	--	peak
2	2483.500	66.56	-0.62	65.94	74.00	-8.06	peak
3	2483.500	37.51	-0.62	36.89	54.00	-17.11	AVG
4	2483.740	66.01	-0.62	65.39	74.00	-8.61	peak
5	2483.740	37.29	-0.62	36.67	54.00	-17.33	AVG
6	2484.600	65.18	-0.61	64.57	74.00	-9.43	peak
7	2484.600	37.20	-0.61	36.59	54.00	-17.41	AVG
8	2485.360	63.44	-0.61	62.83	74.00	-11.17	peak
9	2485.360	36.92	-0.61	36.31	54.00	-17.69	AVG
10	2486.140	62.86	-0.61	62.25	74.00	-11.75	peak
11	2486.140	36.80	-0.61	36.19	54.00	-17.81	AVG
12	2487.140	61.54	-0.60	60.94	74.00	-13.06	peak
13	2487.140	36.68	-0.60	36.08	54.00	-17.92	AVG
14	2487.620	61.29	-0.59	60.70	74.00	-13.30	peak
15	2487.620	36.61	-0.59	36.02	54.00	-17.98	AVG
16	2488.340	59.42	-0.59	58.83	74.00	-15.17	peak
17	2488.340	36.47	-0.59	35.88	54.00	-18.12	AVG
18	2489.280	59.49	-0.59	58.90	74.00	-15.10	peak
19	2489.280	36.49	-0.59	35.90	54.00	-18.10	AVG
20	2490.660	58.27	-0.58	57.69	74.00	-16.31	peak
21	2490.660	36.31	-0.58	35.73	54.00	-18.27	AVG
22	2491.360	57.48	-0.58	56.90	74.00	-17.10	peak
23	2491.360	36.28	-0.58	35.70	54.00	-18.30	AVG
24	2492.060	56.89	-0.58	56.31	74.00	-17.69	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.82 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
25	2492.060	36.12	-0.58	35.54	54.00	-18.46	AVG
26	2493.000	56.08	-0.57	55.51	74.00	-18.49	peak
27	2493.000	36.04	-0.57	35.47	54.00	-18.53	AVG
28	2494.080	55.27	-0.57	54.70	74.00	-19.30	peak
29	2494.080	35.92	-0.57	35.35	54.00	-18.65	AVG
30	2495.240	54.76	-0.57	54.19	74.00	-19.81	peak
31	2495.240	35.86	-0.57	35.29	54.00	-18.71	AVG
32	2496.440	53.22	-0.55	52.67	74.00	-21.33	peak
33	2496.440	35.75	-0.55	35.20	54.00	-18.80	AVG
34	2497.820	53.21	-0.55	52.66	74.00	-21.34	peak
35	2497.820	35.80	-0.55	35.25	54.00	-18.75	AVG
36	2499.440	52.52	-0.54	51.98	74.00	-22.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.82 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

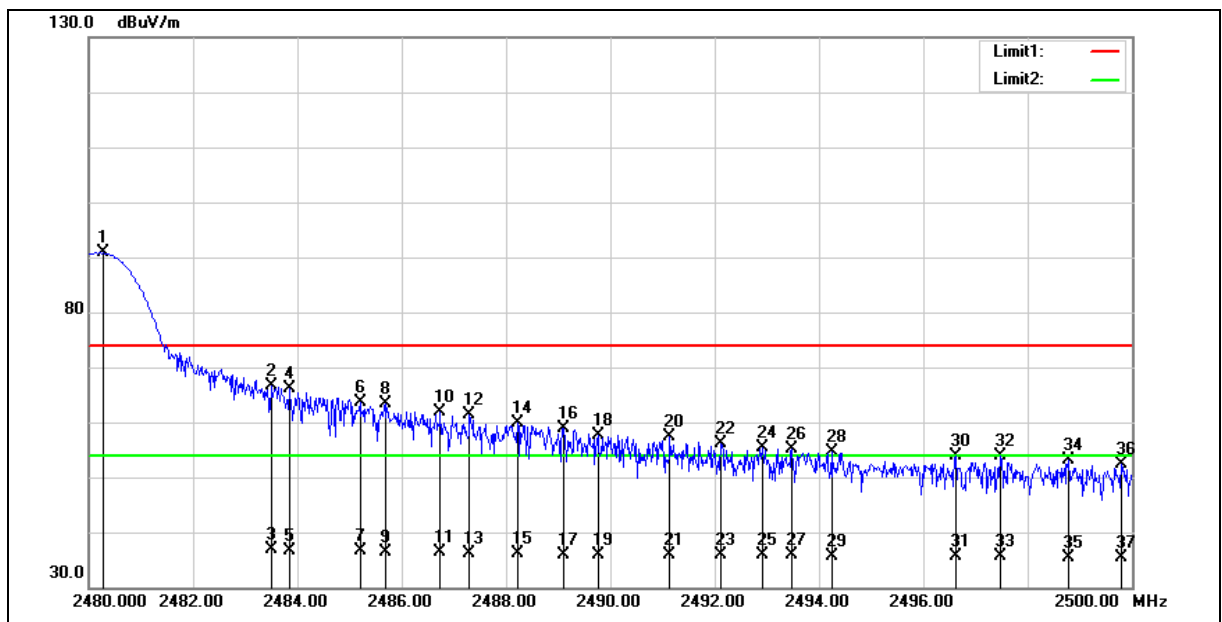

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.82 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.280	91.45	-0.63	90.82	--	--	peak
2	2483.500	67.28	-0.62	66.66	74.00	-7.34	peak
3	2483.500	37.52	-0.62	36.90	54.00	-17.10	AVG
4	2483.840	66.63	-0.61	66.02	74.00	-7.98	peak
5	2483.840	37.33	-0.61	36.72	54.00	-17.28	AVG
6	2485.200	64.31	-0.61	63.70	74.00	-10.30	peak
7	2485.200	37.17	-0.61	36.56	54.00	-17.44	AVG
8	2485.680	63.94	-0.61	63.33	74.00	-10.67	peak
9	2485.680	37.08	-0.61	36.47	54.00	-17.53	AVG
10	2486.740	62.38	-0.61	61.77	74.00	-12.23	peak
11	2486.740	36.90	-0.61	36.29	54.00	-17.71	AVG
12	2487.300	61.89	-0.60	61.29	74.00	-12.71	peak
13	2487.300	36.78	-0.60	36.18	54.00	-17.82	AVG
14	2488.220	60.53	-0.59	59.94	74.00	-14.06	peak
15	2488.220	36.70	-0.59	36.11	54.00	-17.89	AVG
16	2489.100	59.53	-0.59	58.94	74.00	-15.06	peak
17	2489.100	36.53	-0.59	35.94	54.00	-18.06	AVG
18	2489.760	58.23	-0.58	57.65	74.00	-16.35	peak
19	2489.760	36.54	-0.58	35.96	54.00	-18.04	AVG
20	2491.140	58.05	-0.58	57.47	74.00	-16.53	peak
21	2491.140	36.49	-0.58	35.91	54.00	-18.09	AVG
22	2492.120	56.74	-0.58	56.16	74.00	-17.84	peak
23	2492.120	36.34	-0.58	35.76	54.00	-18.24	AVG
24	2492.920	55.92	-0.57	55.35	74.00	-18.65	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.82 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 5		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
25	2492.920	36.41	-0.57	35.84	54.00	-18.16	AVG
26	2493.480	55.76	-0.57	55.19	74.00	-18.81	peak
27	2493.480	36.36	-0.57	35.79	54.00	-18.21	AVG
28	2494.240	55.29	-0.57	54.72	74.00	-19.28	peak
29	2494.240	36.29	-0.57	35.72	54.00	-18.28	AVG
30	2496.620	54.35	-0.55	53.80	74.00	-20.20	peak
31	2496.620	36.14	-0.55	35.59	54.00	-18.41	AVG
32	2497.480	54.33	-0.55	53.78	74.00	-20.22	peak
33	2497.480	36.06	-0.55	35.51	54.00	-18.49	AVG
34	2498.780	53.66	-0.54	53.12	74.00	-20.88	peak
35	2498.780	35.98	-0.54	35.44	54.00	-18.56	AVG
36	2499.800	52.92	-0.54	52.38	74.00	-21.62	peak
37	2499.800	35.82	-0.54	35.28	54.00	-18.72	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


3. When the peak results are less than average limit, so not need to evaluate the average

4.4 非必要頻帶之量測

合格標準：

發射限制： 使用頻帶範圍外之任意 100 千赫 (kHz)內，發射器所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之 100 千赫 (kHz)內的射頻功率，須衰減 20 分貝(dB)，以射頻傳導或輻射方式測量。

測試架構圖：

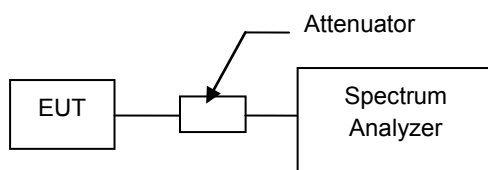

測試結果：

操作模式	Mode 2: BR,GFSK Continuous TX Mode Mode 4: EDR, 8DPSK Continuous TX Mode Mode 5: LE, GFSK Continuous TX Mode
測試結果	合格
量測之結果掃圖如下頁所示	


附註 1: 於使用頻帶範圍之任意 100 千赫 (kHz)內，發射器所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之 100 千赫 (kHz)內的射頻功率，衰減 20 分貝(dB)以上，符合規定。

附註 2: 測試結果頻帶外之輻射雜訊皆小於主頻 TX 20 dB。

Out of Band Conducted Spurious Emission

Mode 2: BR,GFSK Continuous TX Mode


低頻道

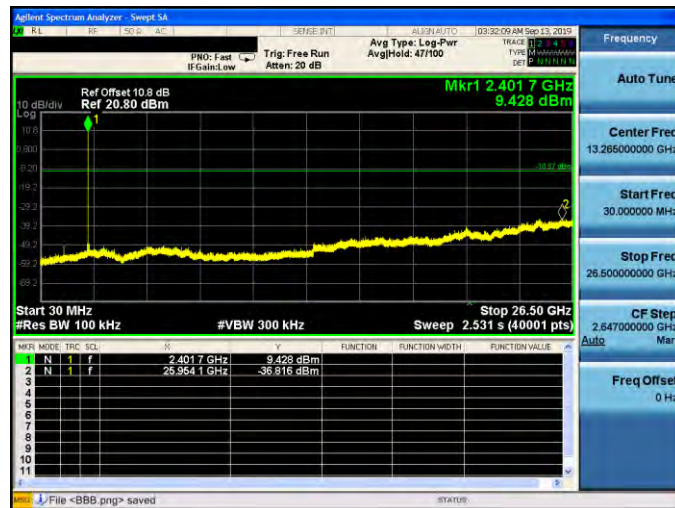

中頻道




高頻道

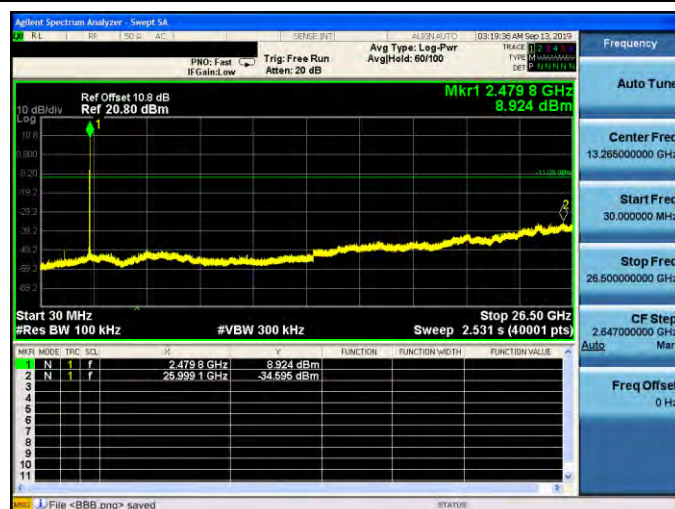


Mode 4: EDR, 8DPSK Continuous TX Mode


低頻道

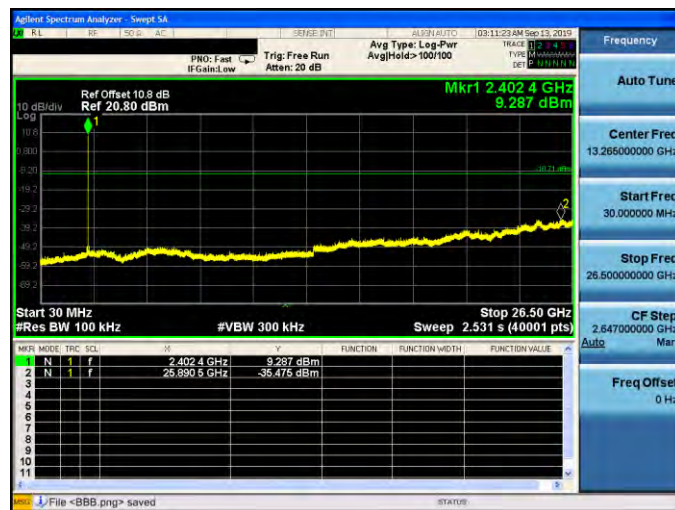

中頻道

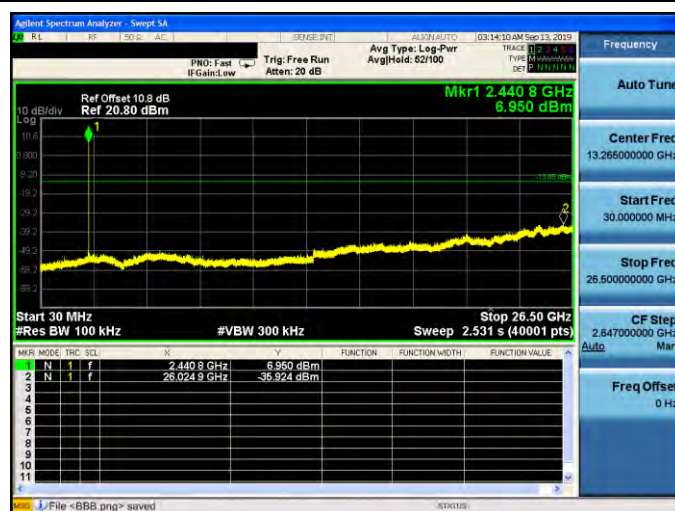


高頻道

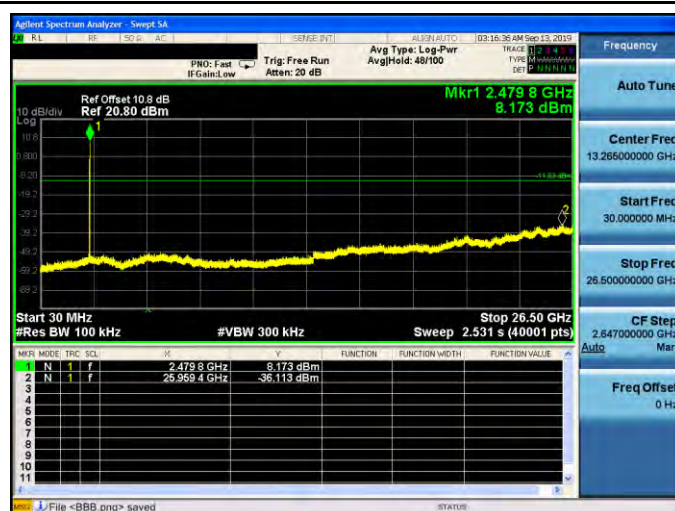


Mode 5: LE, GFSK Continuous TX Mode

低頻道

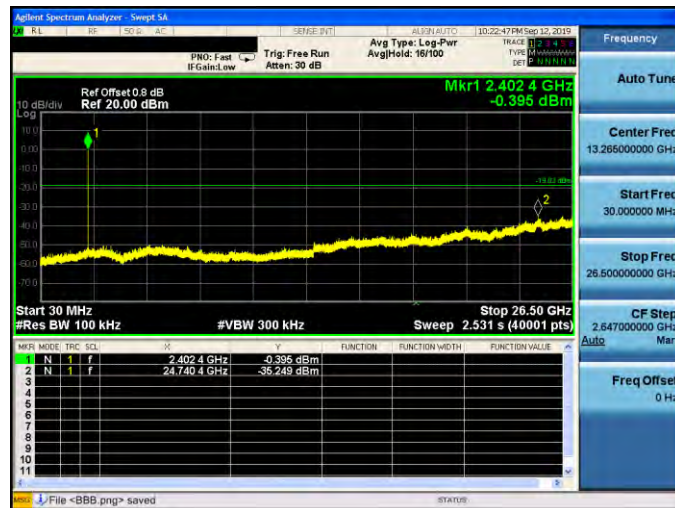

中頻道

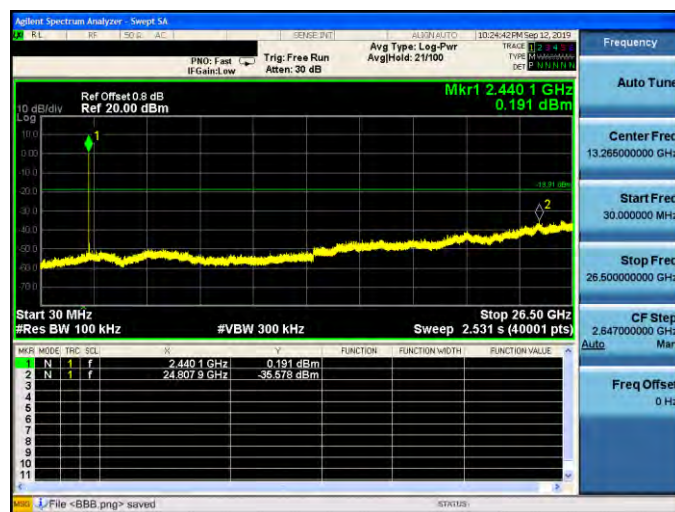

高頻道



Reference level

Mode 5: LE, GFSK Continuous TX Mode

低頻道



中頻道



高頻道



Conducted Band Edge


Mode 2: BR,GFSK Continuous TX Mode_Un-hopping

低頻道



高頻道



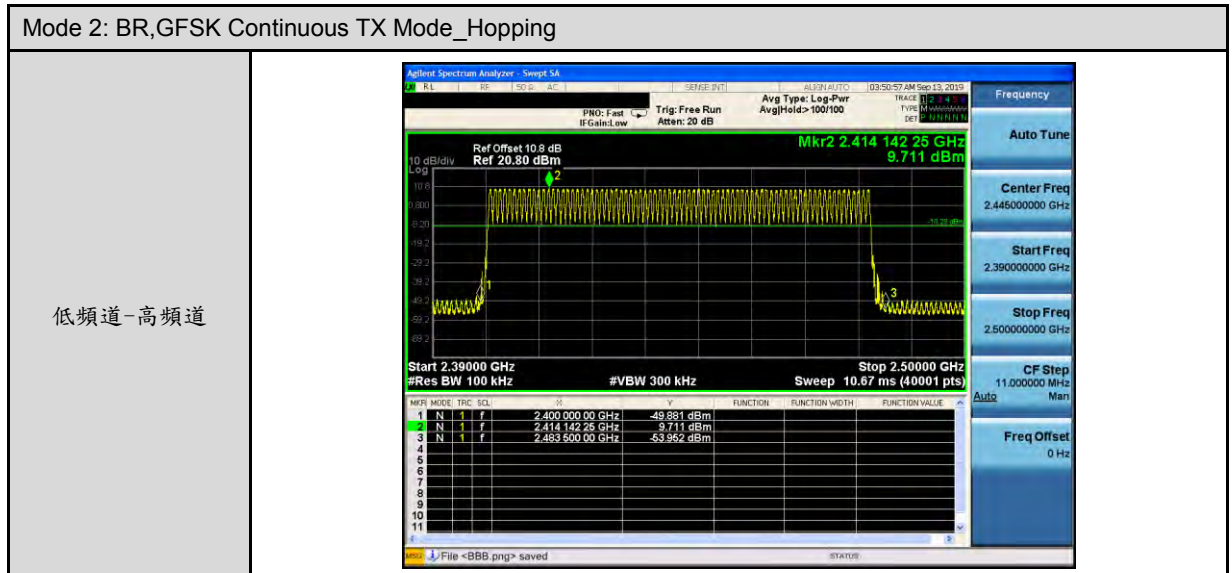


Mode 4: EDR, 8DPSK Continuous TX Mode_Un-hopping


低頻道



高頻道



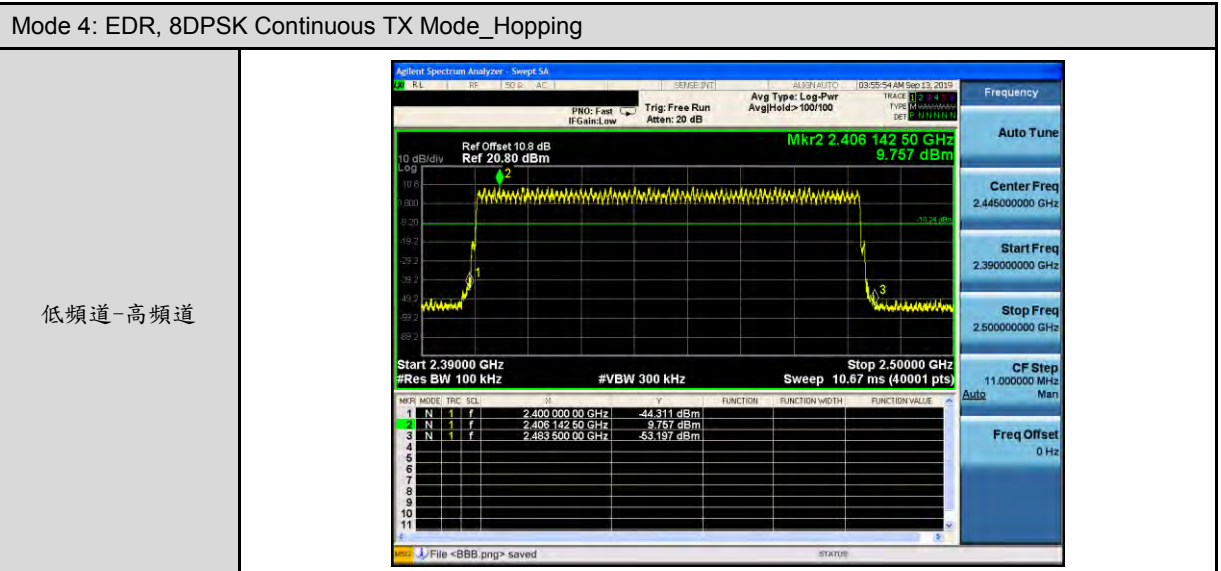

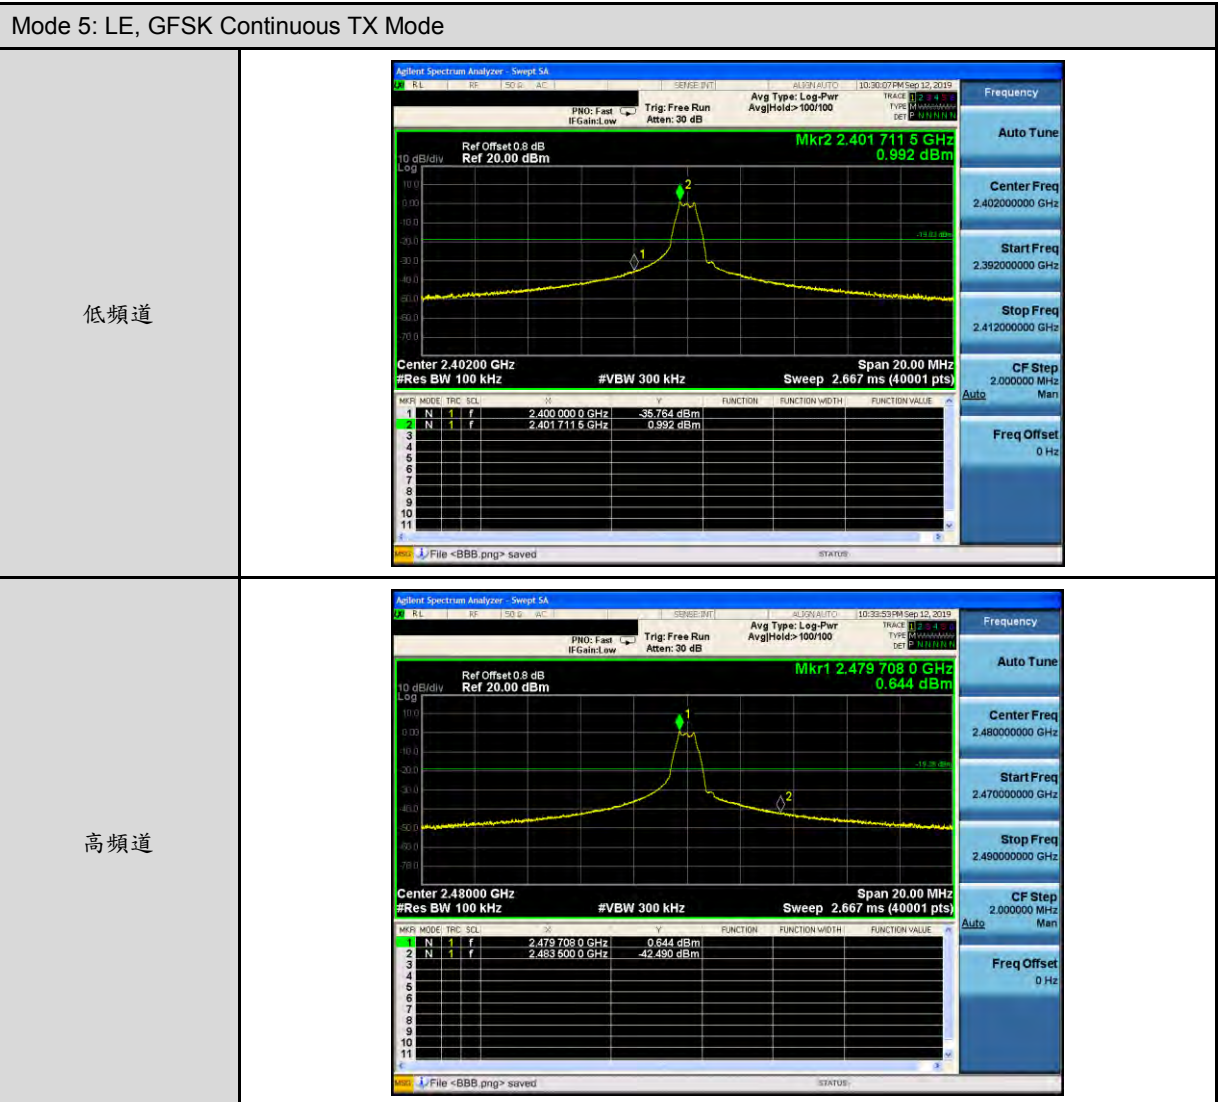


4.5 頻率範圍之要求

合格標準：

依據 NCC 低功率射頻電機技術規範(LP0002)之 3.10.1.1 節之要求，允許使用的頻率範圍為 2400 至 2483.5 MHz。

測試架構圖：

測試場地測試配置如圖所示。

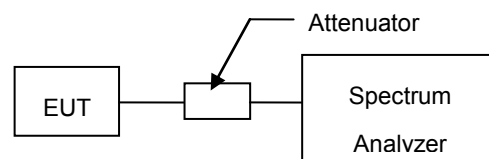


測試結果：


操作模式	: Mode 2: BR, GFSK Continuous TX Mode Mode 4: EDR, 8DPSK Continuous TX Mode
測試結果	: 合格
量測之掃描圖如下頁所示	


Mode 2: BR, GFSK Continuous TX Mode

CH00 - CH39

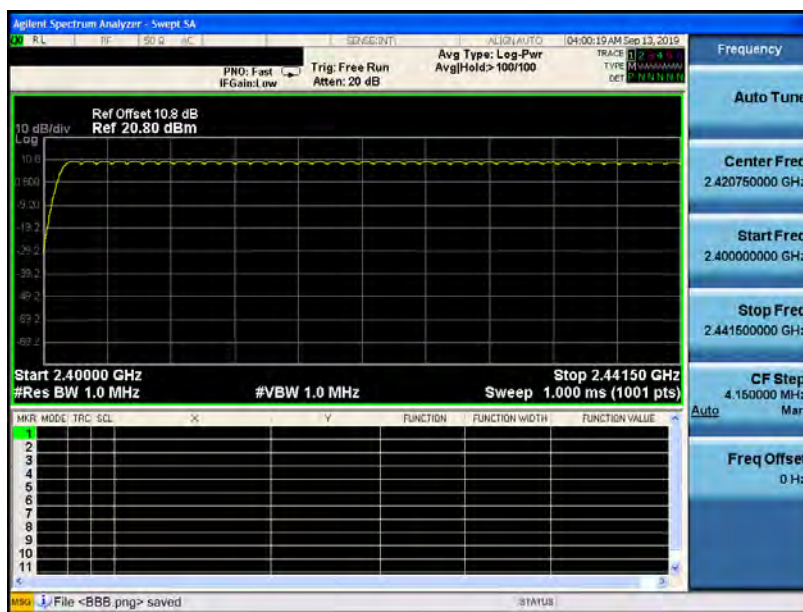

CH39- CH78

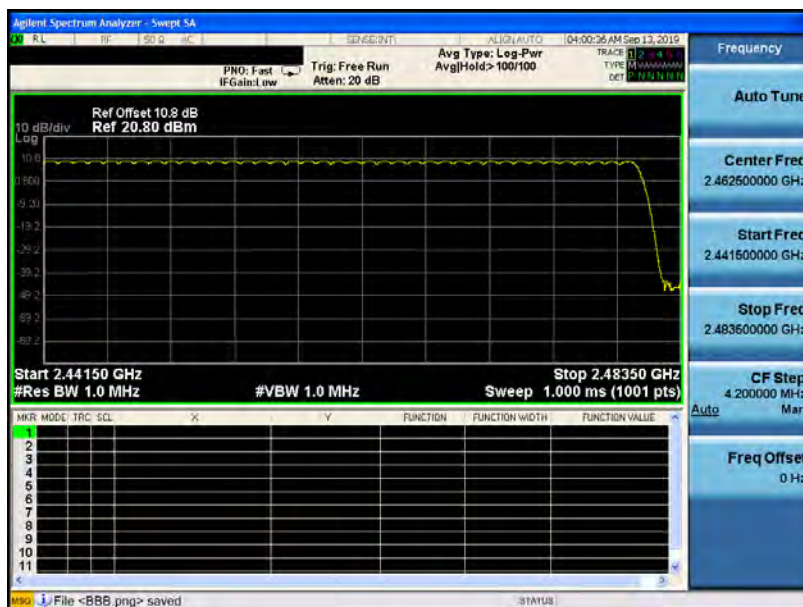

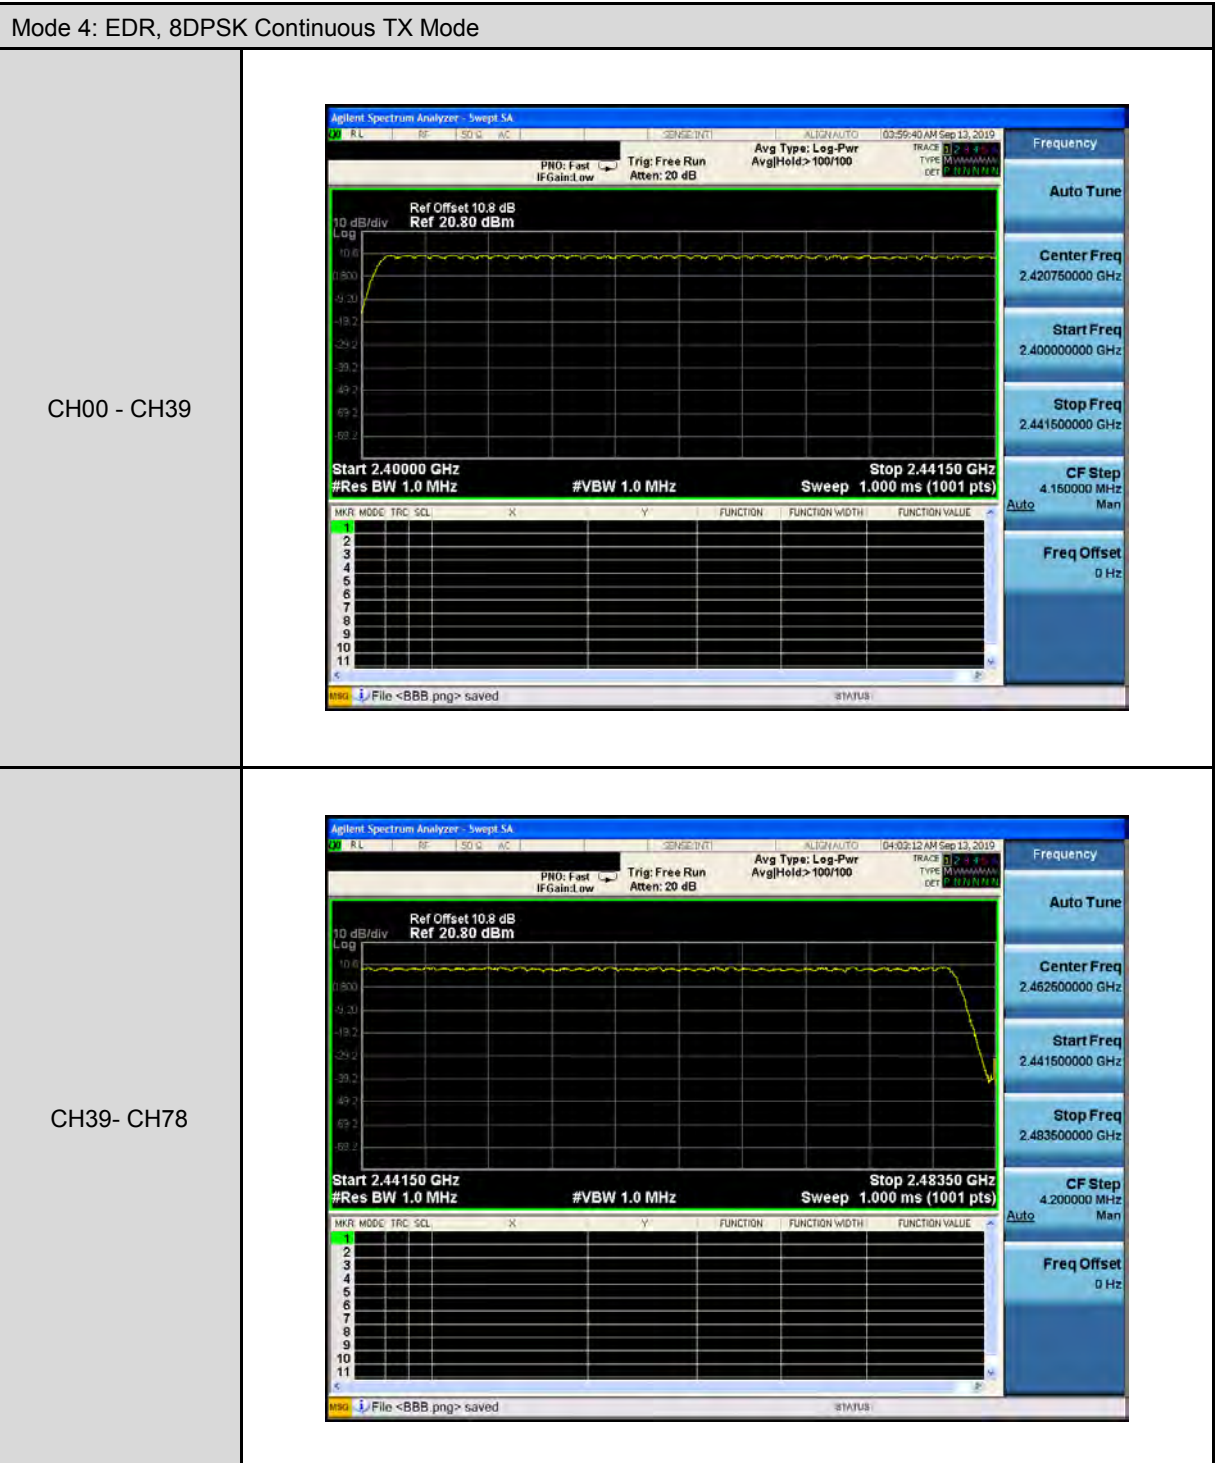

4.6 發射頻寬之要求

合格標準:


BR/EDR

對跳頻系統(Frequency Hopping System)而言，依據 NCC 低功率射頻電機技術規範 3.10.1.6(1)(A)節之要求，跳頻系統之載波頻率頻道間隔應至少 25 千赫(kHz)或跳頻頻道 20 dB 頻寬之三分之二，兩者取較寬者。系統之跳頻頻道應依虛擬亂數排列，在各頻率之跳頻頻道上跳躍。每一發射機必須均等的使用每一頻率。系統接收機應具有與發射機跳躍頻道頻寬相匹配之輸入頻寬，且應隨所發射的信號同步偏移接收頻率。

LE

依據 NCC 低功率射頻電機技術規範 3.10.1.6(2)(A)節之要求，對使用數位調變技術(Digital Modulation Techniques)系統而言，6 dB 頻寬至少應有 500 千赫(kHz)。

測試架構圖：

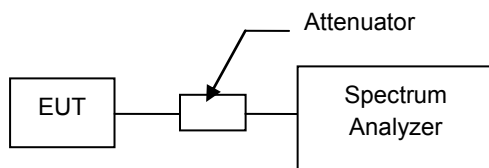

測試結果:

操作模式：Mode 2: BR, GFSK Continuous TX Mode Mode 4: EDR, 8DPSK Continuous TX Mode				
操作模式	頻道	發射頻寬(20 dB)		
		量測值 (MHz)	2/3 量測值 (MHz)	限制值 (MHz)
Mode 2	低頻道	0.966	0.644	-----
	中頻道	0.971	0.647	-----
	高頻道	0.971	0.647	-----
Mode 4	低頻道	1.313	0.875	-----
	中頻道	1.318	0.879	-----
	高頻道	1.315	0.877	-----
註：發射頻寬(20 dB) 之 2/3 量測值 = 量測值 x 2 / 3				
測試掃描圖請參考下頁。				

操作模式： Mode 5: LE, GFSK Continuous TX Mode			
操作模式	頻道	發射頻寬(6 dB)	
		量測值 (kHz)	限制值 (kHz)
Mode 5	低頻道	712.400	≥ 500
	中頻道	707.900	≥ 500
	高頻道	705.800	≥ 500
測試掃描圖請參考下頁。			

Mode 2: BR, GFSK Continuous TX Mode

低頻道



中頻道



高頻道








4.7 頻道數之要求

合格標準：


對跳頻系統(Frequency Hopping System)而言,依據 NCC 低功率射頻電機技術規範(LP0002)之 3.10.1.6(1)(A)(a)節之要求，至少使用 15 個無重疊之頻道(複合系統時,關閉數位調變作業狀態檢驗)。

測試架構圖：

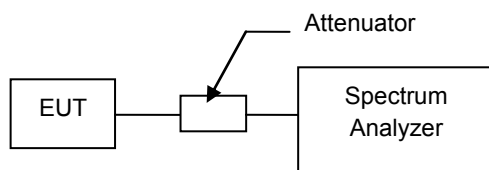


測試結果：

操作模式	: Mode 2: BR, GFSK Continuous TX Mode Mode 4: EDR, 8DPSK Continuous TX Mode
測試結果	: 合格
量測之掃描圖如下頁所示	

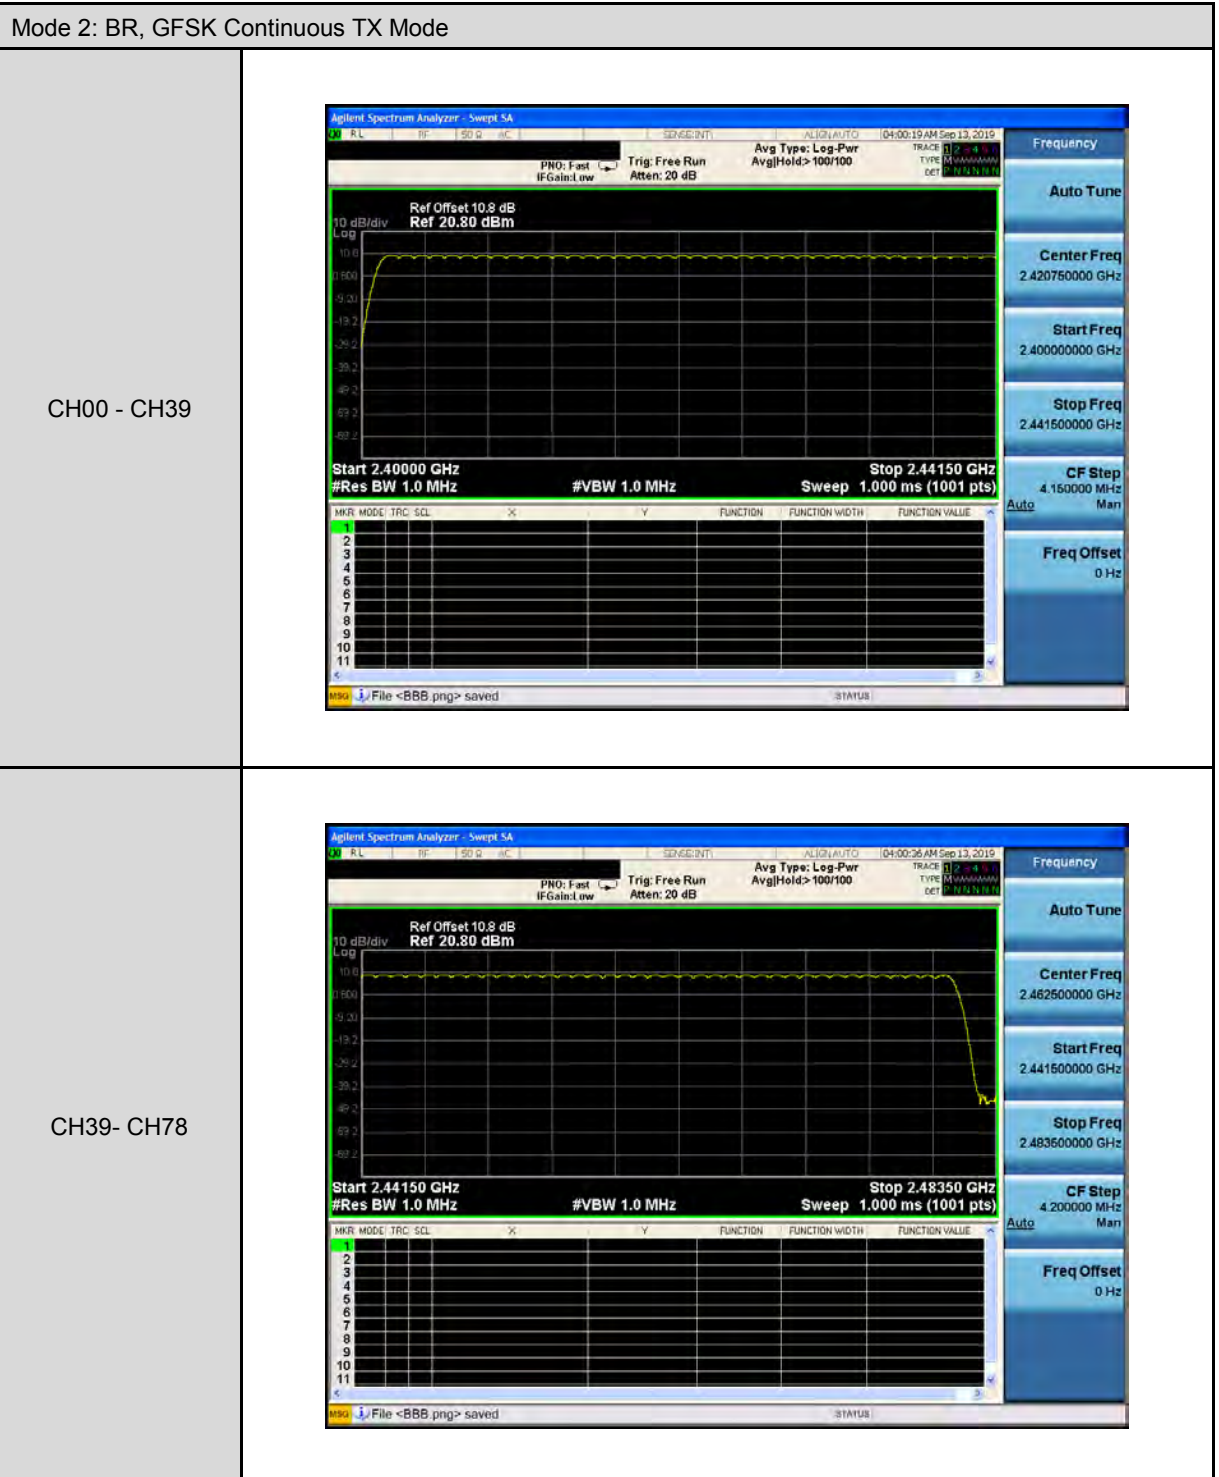


Mode 4: EDR, 8DPSK Continuous TX Mode

CH00 - CH39

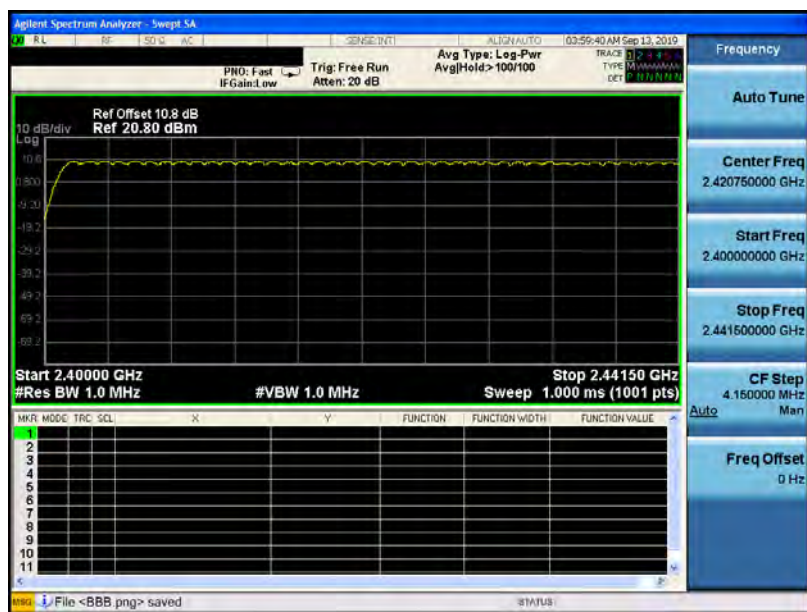

CH39- CH78

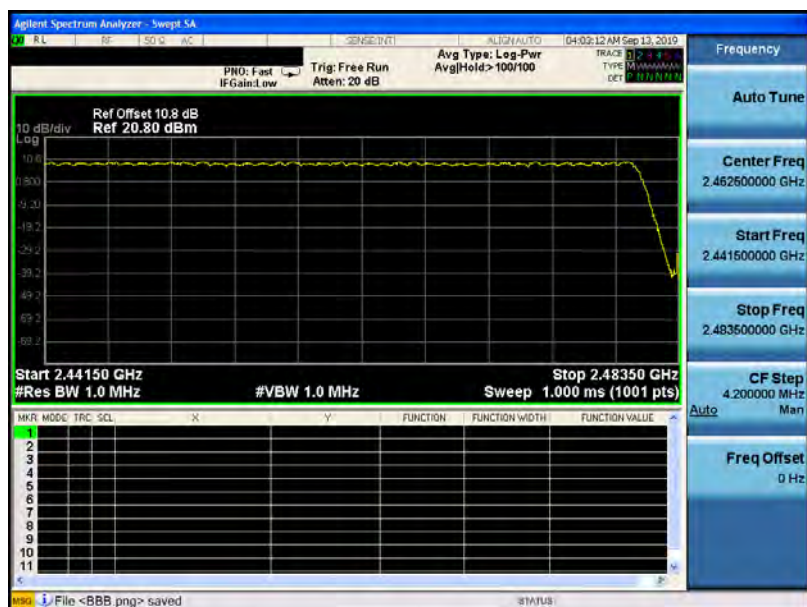


4.8 跳頻系統之載波頻率頻道間隔之量測

合格標準:

依據 NCC 低功率射頻電機技術規範(LP0002) 之 3.10.1.6(1)(A)節要求，應至少 25 kHz 或跳頻頻道之 20 dB 頻寬之三分之二,兩者取較寬者。

測試架構圖：

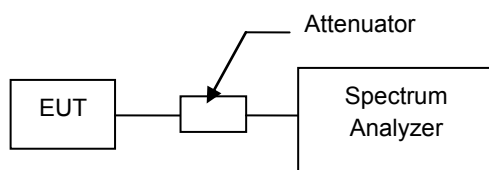

測試結果:

操作模式： Mode 2: BR, GFSK Continuous TX Mode Mode 4: EDR, 8DPSK Continuous TX Mode			
操作模式	頻道	鄰頻道載波間隔	
		量測值 (MHz)	限制值 (MHz)
Mode 2	低頻道	1.000	≥ 0.644
	中頻道	1.000	≥ 0.647
	高頻道	1.000	≥ 0.647
Mode 4	低頻道	1.000	≥ 0.875
	中頻道	1.000	≥ 0.879
	高頻道	1.000	≥ 0.877

Mode 2: BR, GFSK Continuous TX Mode

低頻道



中頻道



高頻道



Mode 4: EDR, 8DPSK Continuous TX Mode

低頻道



中頻道



高頻道




4.9 跳頻系統之任一頻率佔用之平均時間之量測

合格標準:

依據 NCC 低功率射頻電機技術規範(LP0002)之 3.10.1.6(1)(A)(a)節之要求，若使用 15 個無重疊之頻道，在 0.4 秒乘以跳頻頻道數之週期內，任一頻道佔用之平均時間不得超過 0.4 秒(複合系統時，關閉跳頻作業狀態檢驗)。

測試架構圖：

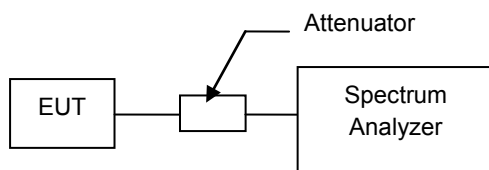


測試結果:

操作模式	: Mode 2: BR, GFSK Continuous TX Mode Mode 4: EDR, 8DPSK Continuous TX Mode
測試結果	: 合格
此項測試進行量測高中低頻道,取其最大值紀錄於此量測結果,量測之結果數據如下頁所示。	

Mode 2: BR, GFSK Continuous TX Mode	
DH1 模式	
需量測之週期(秒)	$79\text{CH} * 0.4 = 31.6$ (秒)
待測物每秒跳頻之總次數	1600(藍牙通訊協定標準)
頻道每秒佔用之次數	$800/79\text{CH} = 10.13$ (次/秒)
頻道每次佔用之時間(1)	0.430 ms (秒)
週期內頻道佔用之總次數(2)	$31.6 * 10.13 = 320.108$ (次)
週期內佔用的平均時間(1) * (2)	137.646 ms (秒)
LIMIT(msec)	≤ 400
DH3 模式	
需量測之週期(秒)	$79\text{CH} * 0.4 = 31.6$ (秒)
待測物每秒跳頻之總次數	1600(藍牙通訊協定標準)
頻道每秒佔用之次數	$400/79\text{CH} = 5.06$ (次/秒)
頻道每次佔用之時間(1)	1.670 ms (秒)
週期內頻道佔用之總次數(2)	$31.6 * 5.06 = 159.896$ (次)
週期內佔用的平均時間(1) * (2)	267.026 ms (秒)
LIMIT(msec)	≤ 400
DH5 模式	
需量測之週期(秒)	$79\text{CH} * 0.4 = 31.6$ (秒)
待測物每秒跳頻之總次數	1600(藍牙通訊協定標準)
頻道每秒佔用之次數	$266.7/79\text{CH} = 3.38$ (次/秒)
頻道每次佔用之時間(1)	2.920 ms (秒)
週期內頻道佔用之總次數(2)	$31.6 * 3.38 = 106.808$ (次)
週期內佔用的平均時間(1) * (2)	311.879 ms (秒)
LIMIT(msec)	≤ 400

附註: RB=1 MHz ; VB=1 MHz ; SPAN=0 MHz ; Sweep Time=10 msec

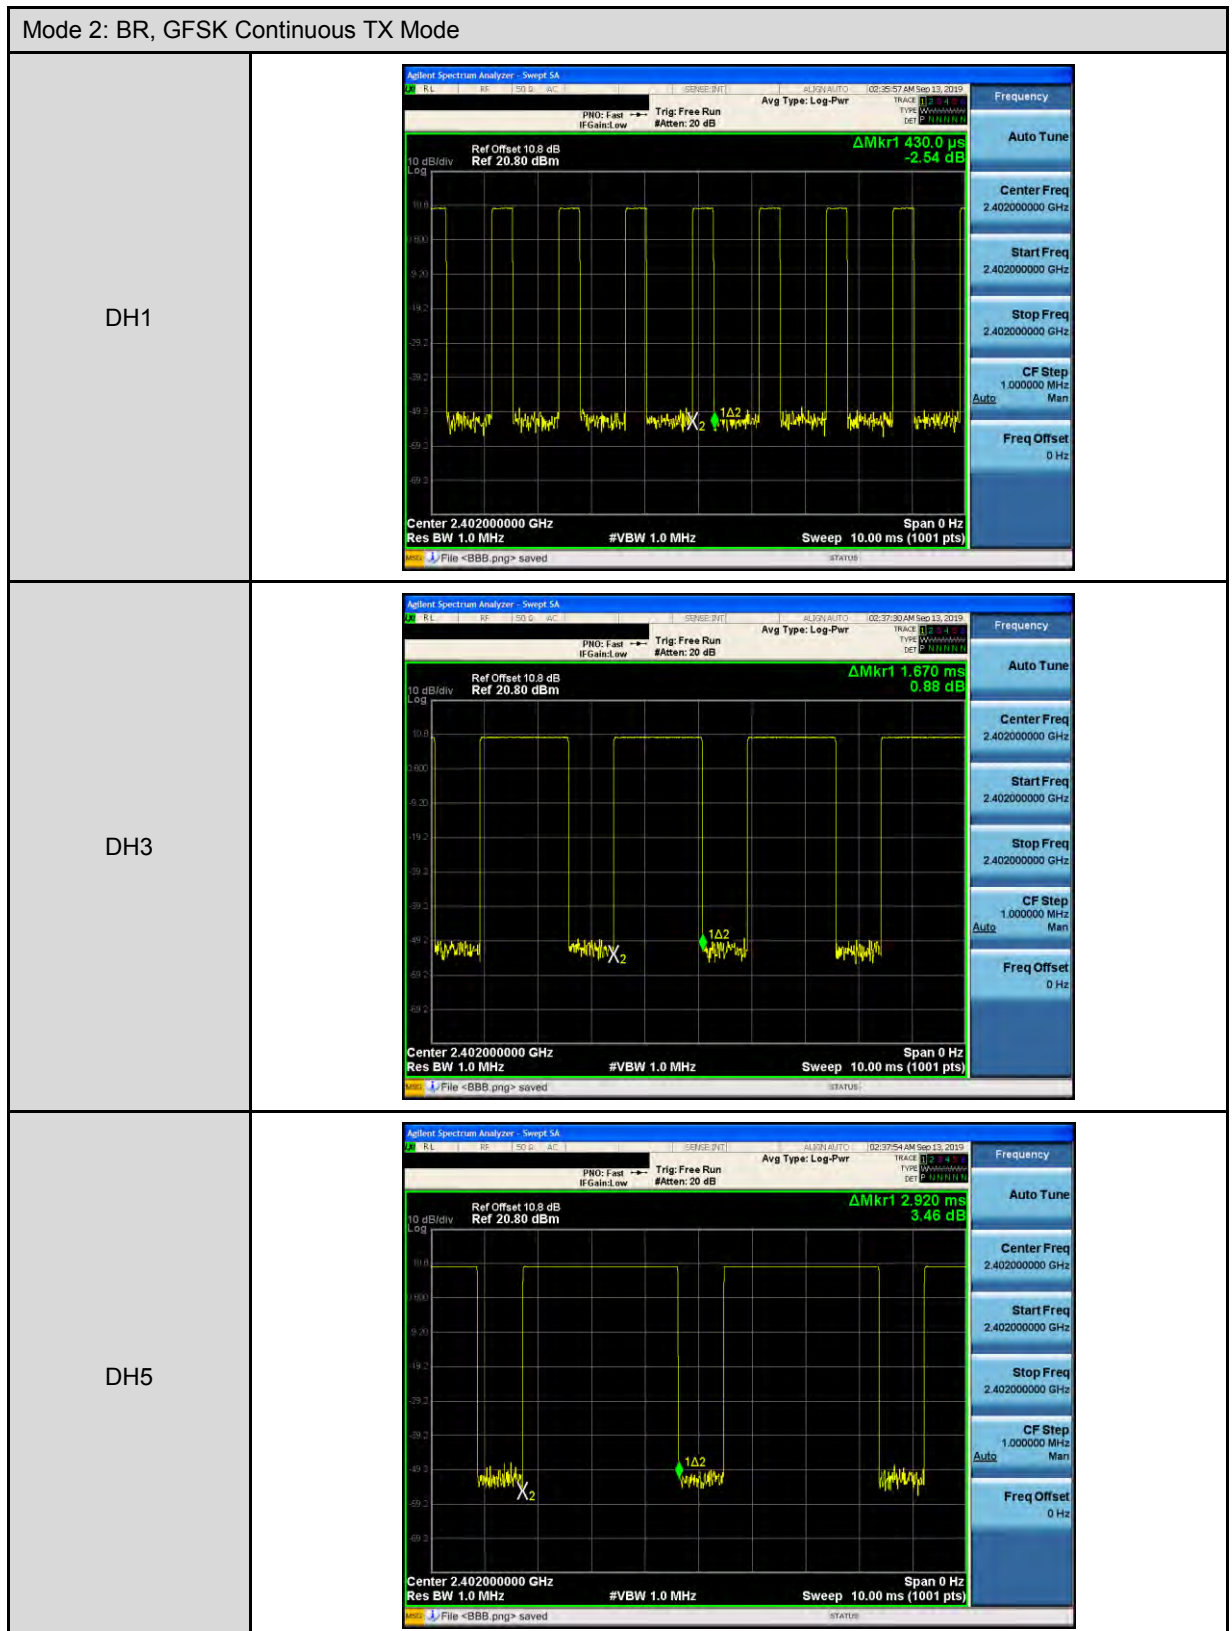

Mode 4: EDR, 8DPSK Continuous TX Mode	
3DH1 模式	
需量測之週期(秒)	$79\text{CH} * 0.4 = 31.6$ (秒)
待測物每秒跳頻之總次數	1600(藍牙通訊協定標準)
頻道每秒佔用之次數	$800/79\text{CH} = 10.13$ (次/秒)
頻道每次佔用之時間(1)	0.430 ms (秒)
週期內頻道佔用之總次數(2)	$31.6 * 10.13 = 320.108$ (次)
週期內佔用的平均時間(1) * (2)	137.646 ms (秒)
LIMIT(msec)	≤ 400
3DH3 模式	
需量測之週期(秒)	$79\text{CH} * 0.4 = 31.6$ (秒)
待測物每秒跳頻之總次數	1600(藍牙通訊協定標準)
頻道每秒佔用之次數	$400/79\text{CH} = 5.06$ (次/秒)
頻道每次佔用之時間(1)	1.670 ms (秒)
週期內頻道佔用之總次數(2)	$31.6 * 5.06 = 159.896$ (次)
週期內佔用的平均時間(1) * (2)	267.026 ms (秒)
LIMIT(msec)	≤ 400
3DH5 模式	
需量測之週期(秒)	$79\text{CH} * 0.4 = 31.6$ (秒)
待測物每秒跳頻之總次數	1600(藍牙通訊協定標準)
頻道每秒佔用之次數	$266.7/79\text{CH} = 3.38$ (次/秒)
頻道每次佔用之時間(1)	2.920 ms (秒)
週期內頻道佔用之總次數(2)	$31.6 * 3.38 = 106.808$ (次)
週期內佔用的平均時間(1) * (2)	311.879 ms (秒)
LIMIT(msec)	≤ 400

附註: RB=1 MHz ; VB=1 MH 附註:RB=1 MHz ; VB=1 MHz ; SPAN=0 MHz ; Sweep Time=10 msec




4.10 功率密度之要求

合格標準：

依據 NCC 低功率射頻電機技術規範(LP0002)之 3.10.1.6(2)(B)節之要求，數位調變技術(Digital Modulation Techniques)系統之功率密度，再使用頻率範圍之任意 3 kHz 頻寬內，由發射機傳導至天線之峰值發射電功率密度在任意期間內，皆不得大於 8 dBm(複合系統時，關閉跳頻作業狀態檢驗)。


測試架構圖：

測試場地測試配置如圖所示。

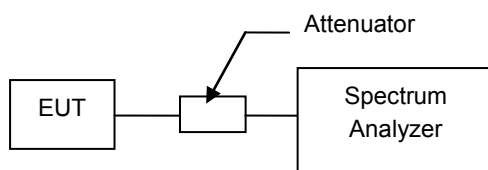

測試結果：

操作模式： Mode 5: LE, GFSK Continuous TX Mode			
測試結果： 合格			
操作模式	頻道	量測值 (dBm/3 kHz)	限制值 (dBm/3 kHz)
Mode 5	低頻道	-13.780	< 8
	中頻道	-13.755	< 8
	高頻道	-14.230	< 8

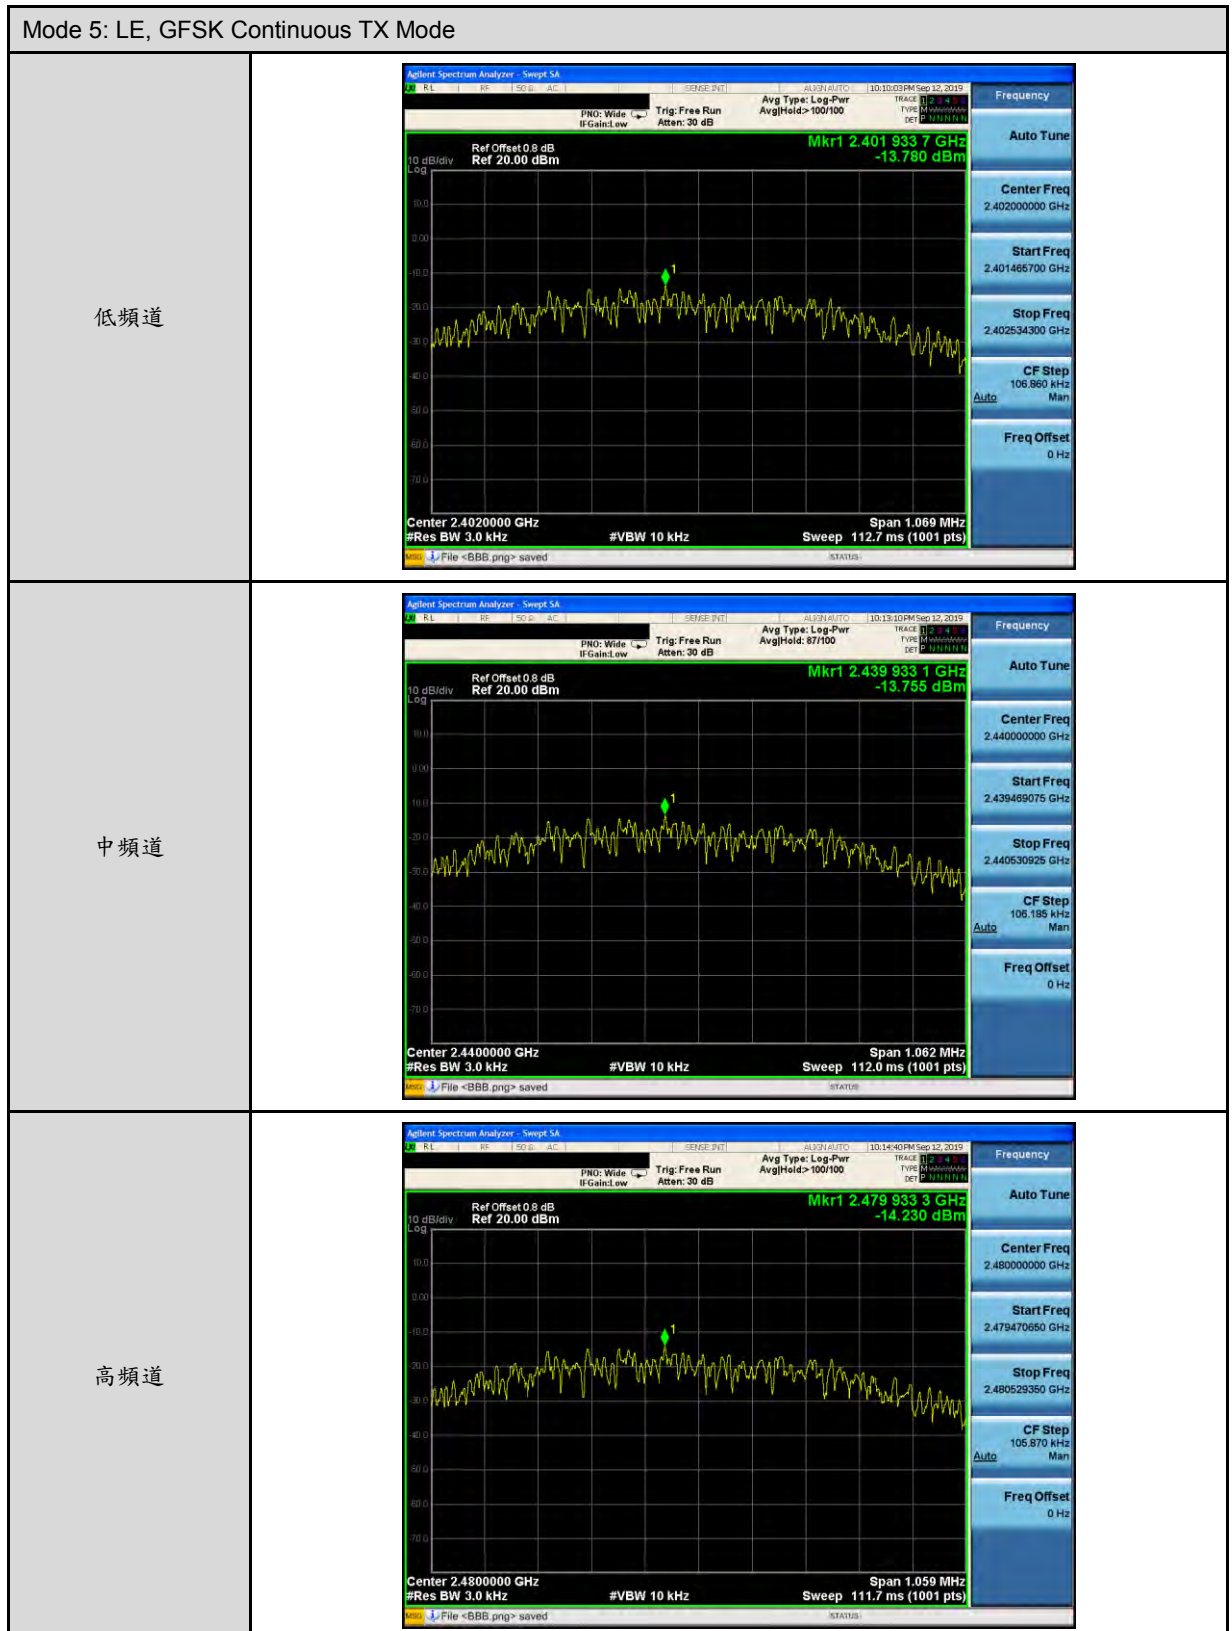

4.11 天線規格之要求

合格標準:

依據 NCC 低功率射頻電機技術規範(LP0002)之 3.10.1.3(3)節之要求，除 3.10.1.3(1)及 3.10.1.3(2)外，使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率限制值。

依據 NCC 低功率射頻電機技術規範(LP0002)之 3.10.1.4 節之要求，天線之規格不受第 2.2 節規定之限制

判定結果:

符合，本產品使用 FPC Antenna (廠牌: 博敏電子, 型號: 309000318913R1)，最大增益值 -1.35 dBi。

--- END---