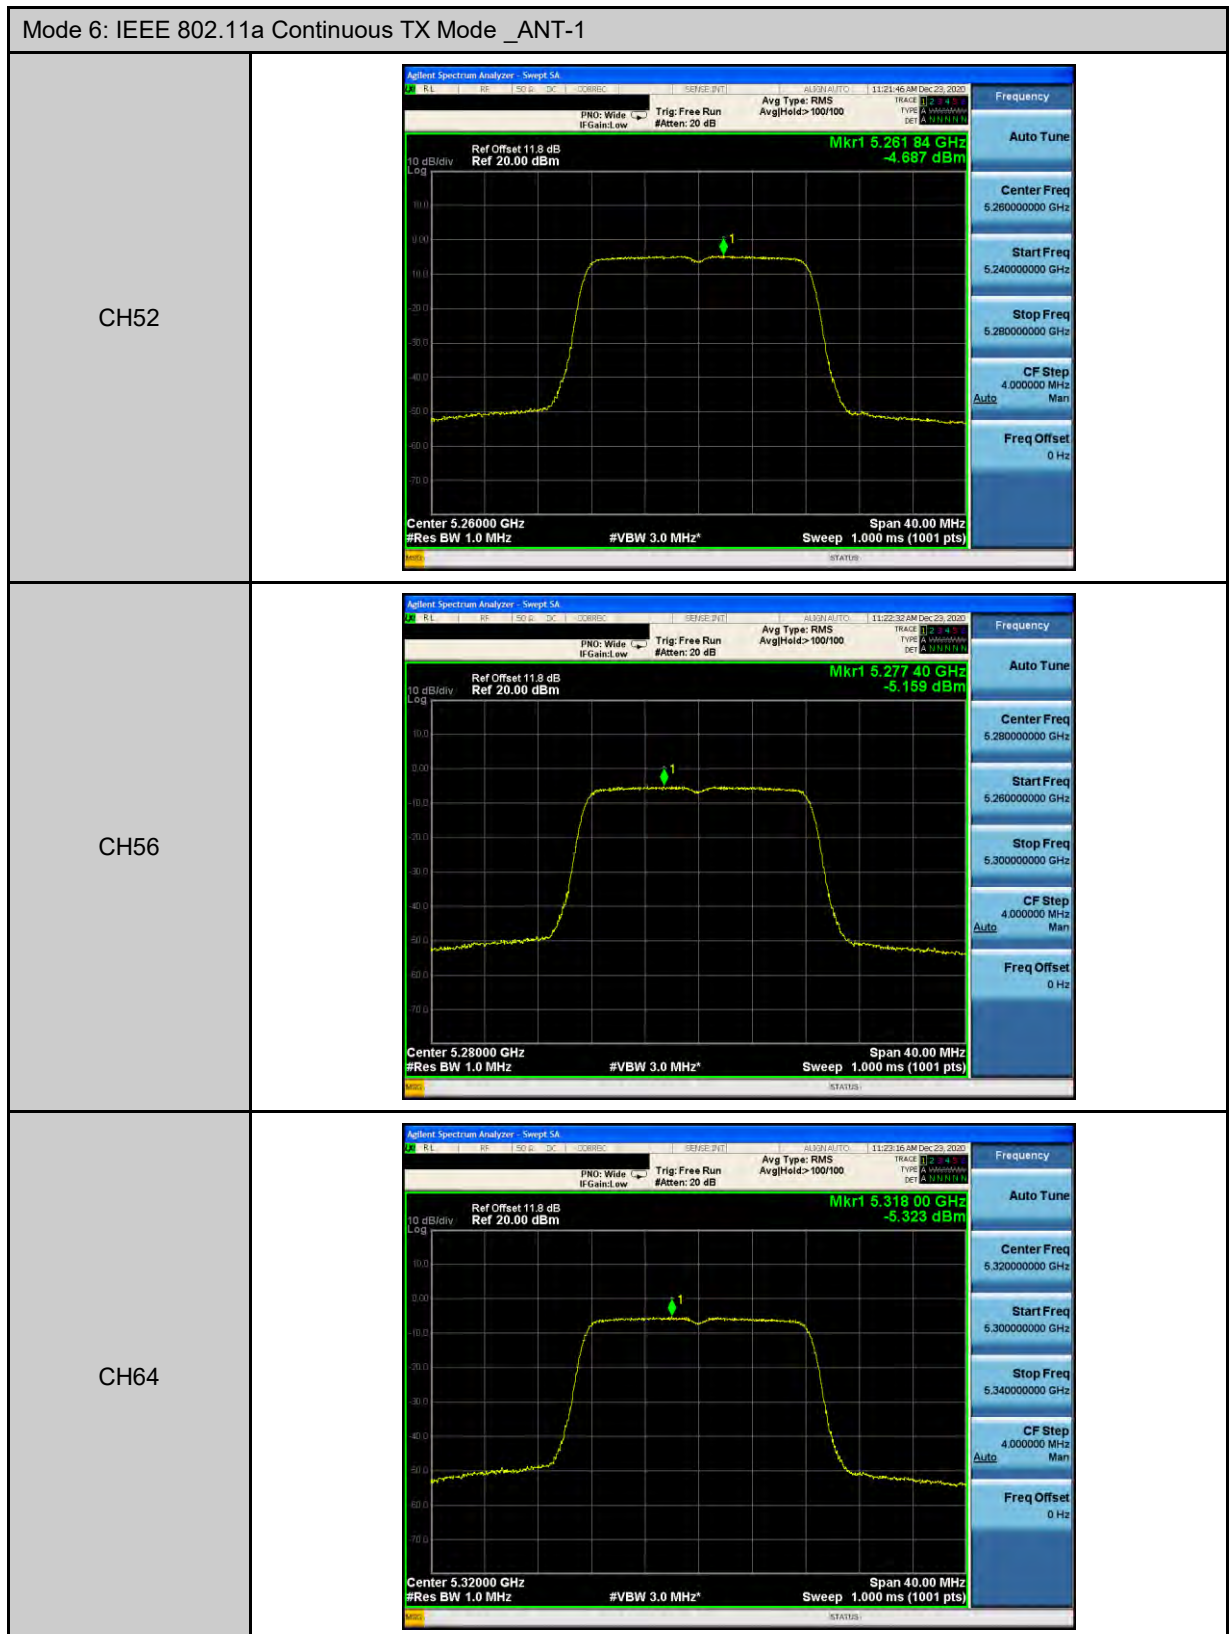
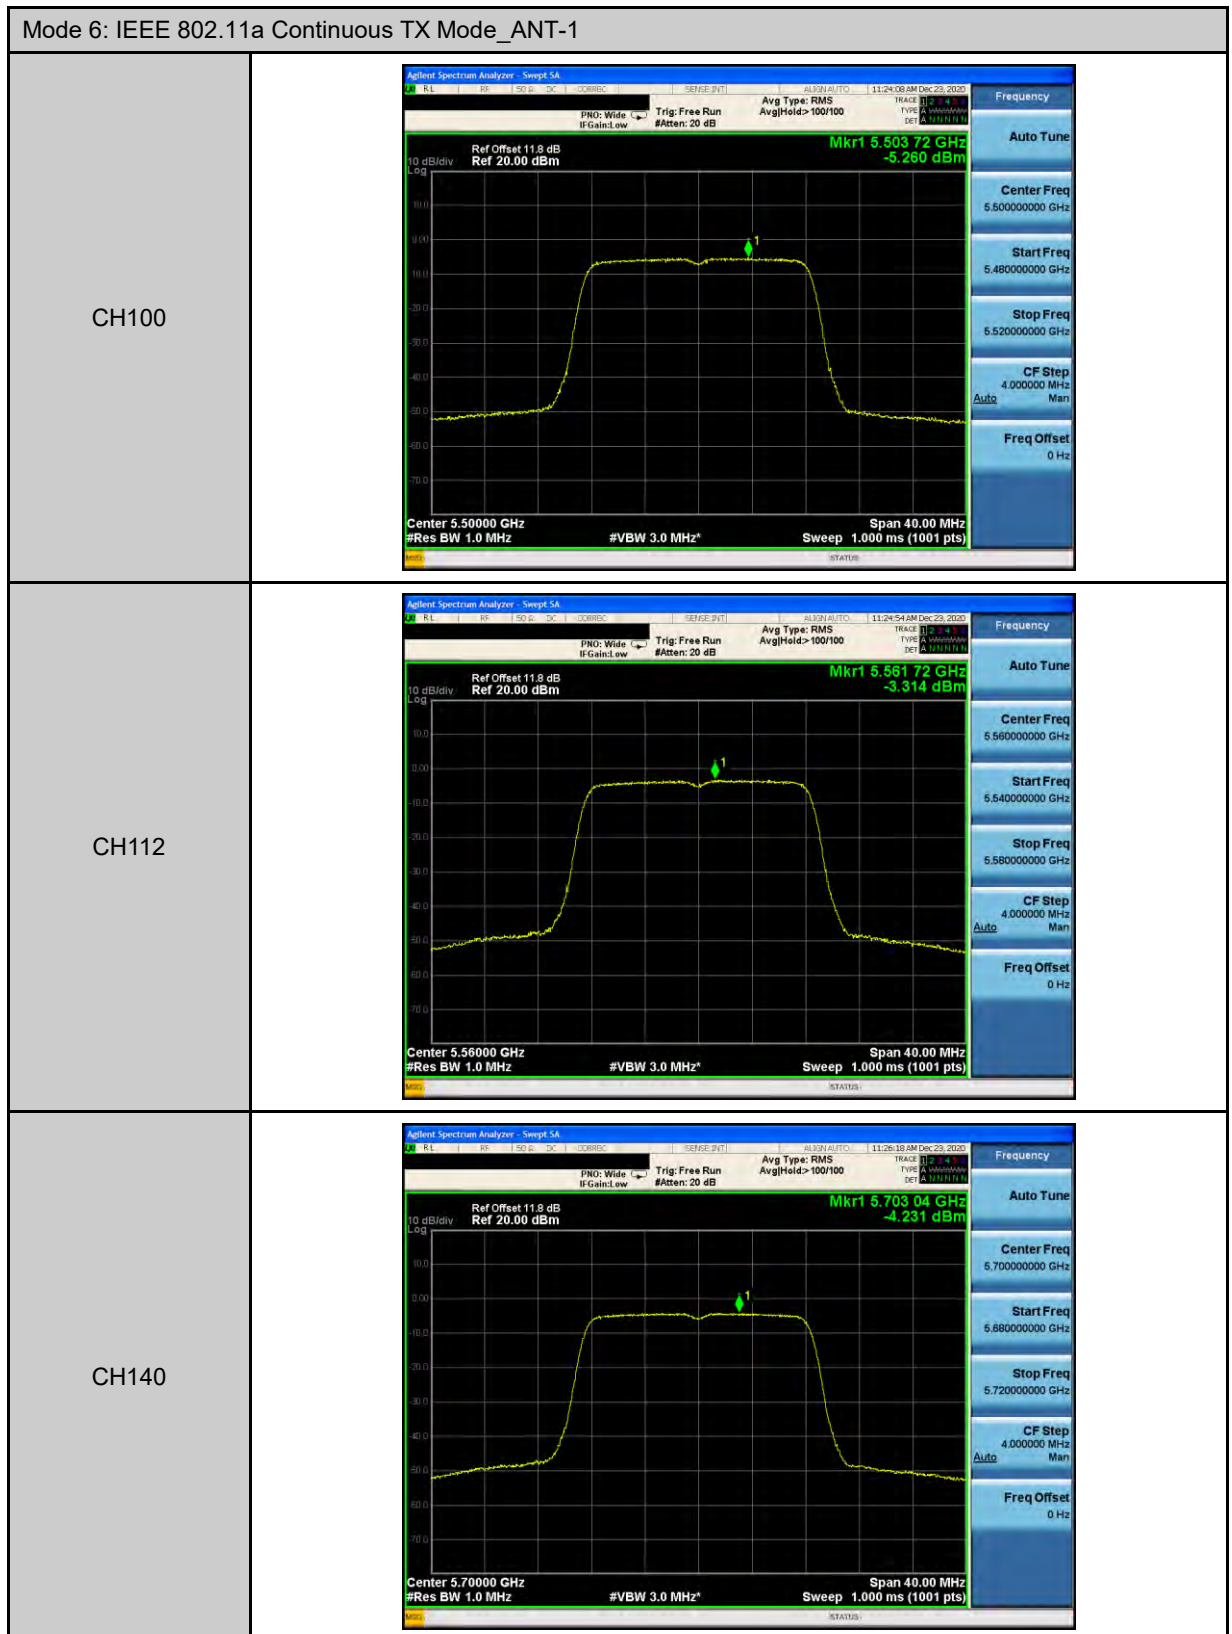
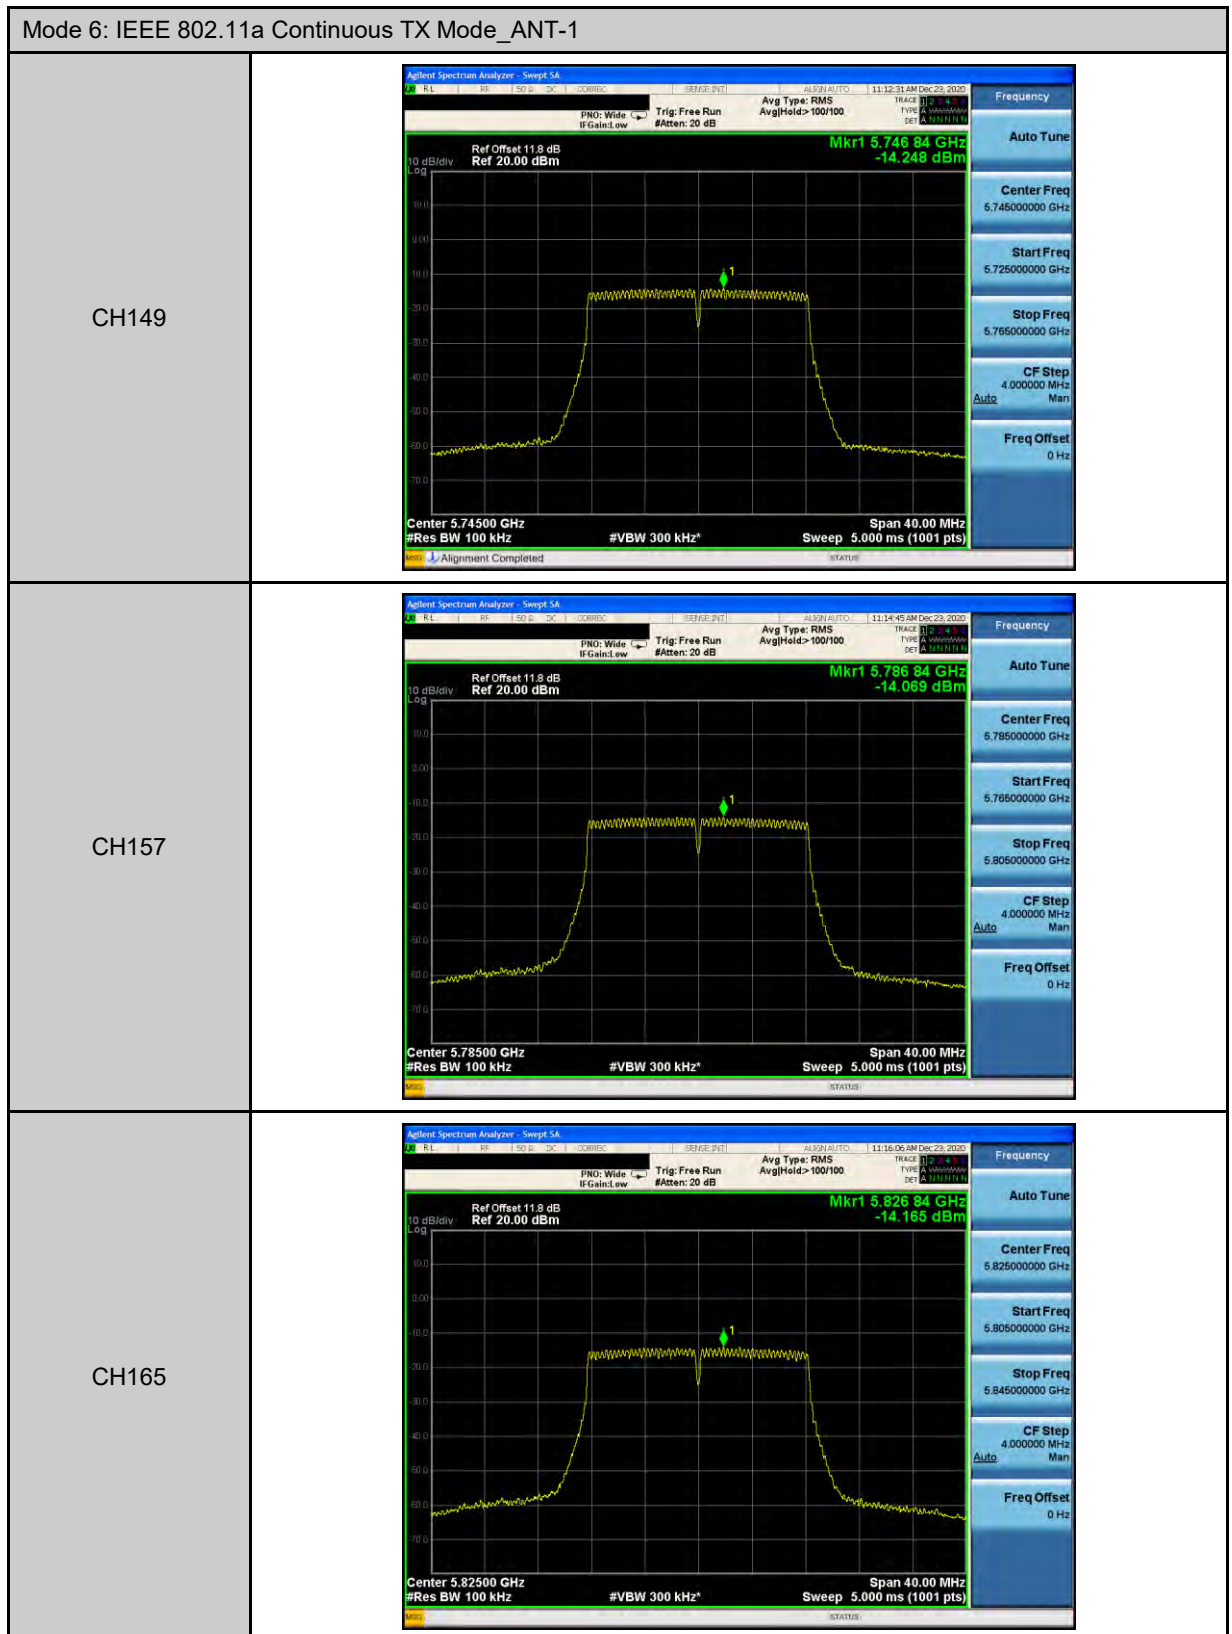
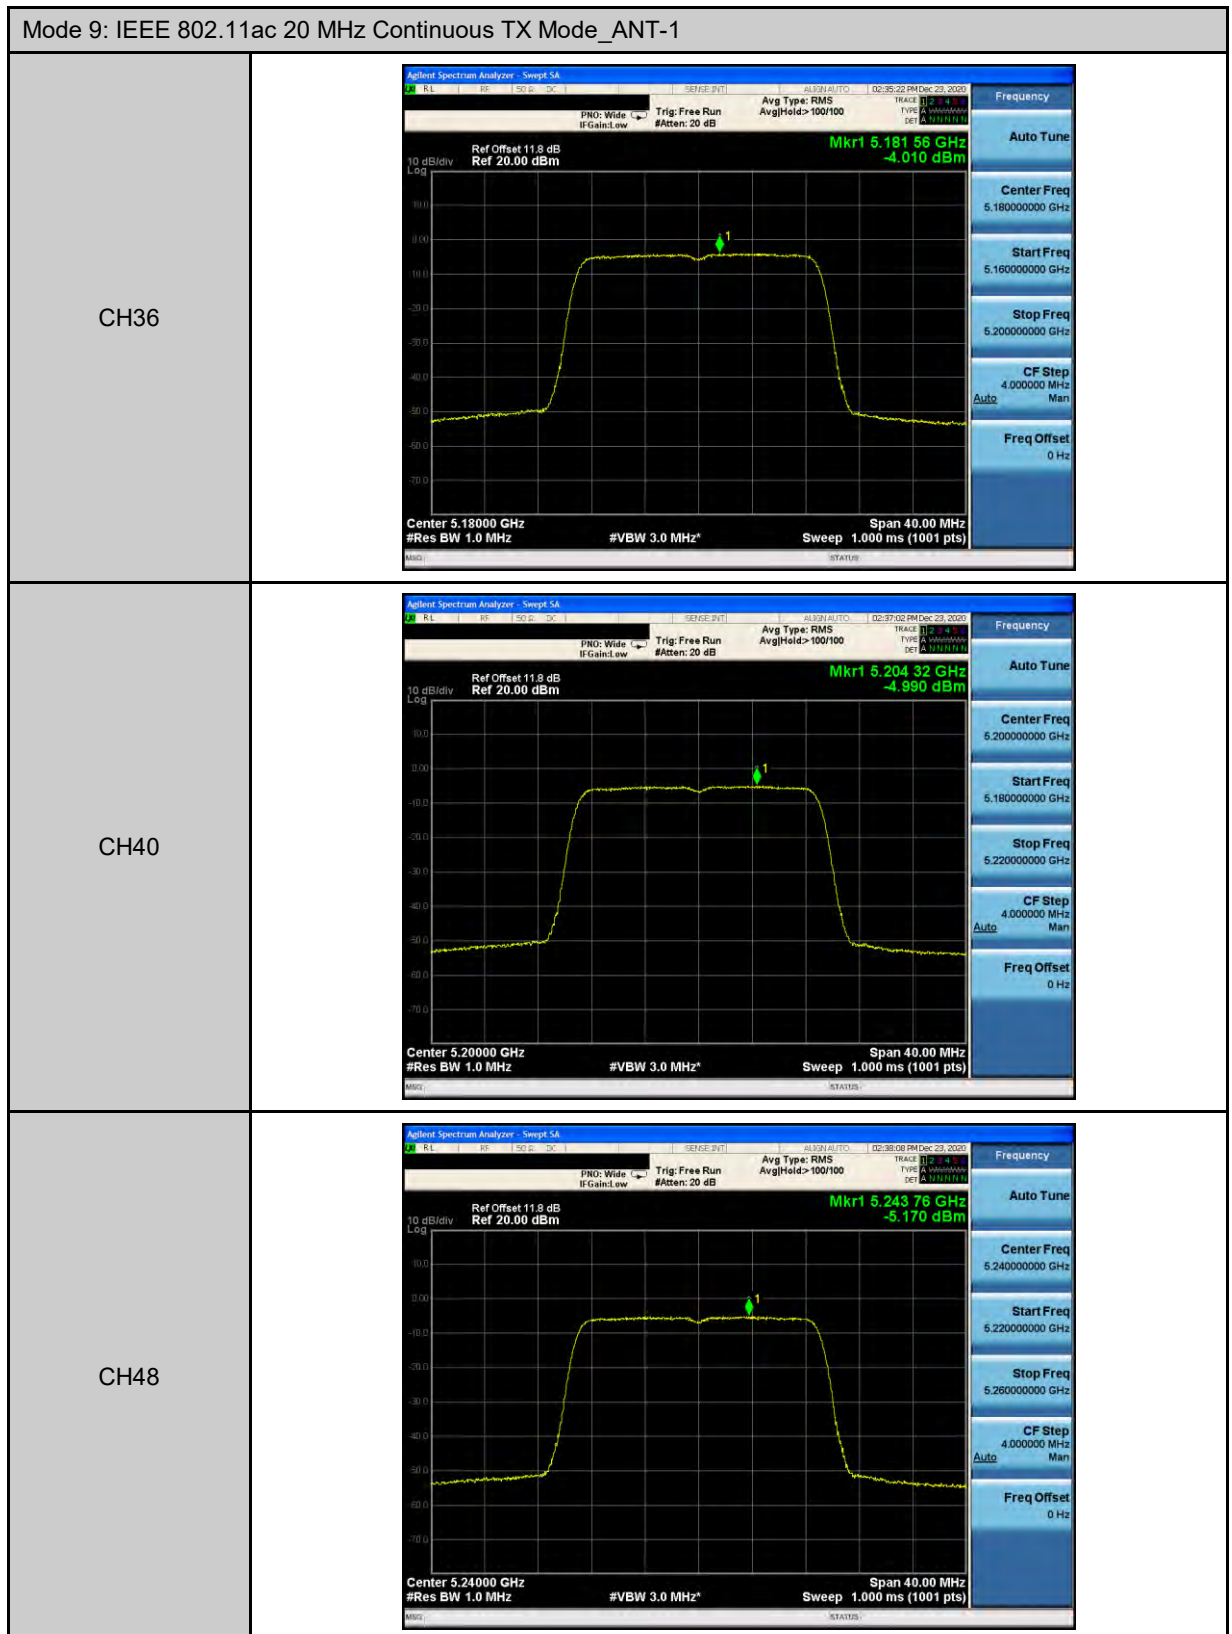


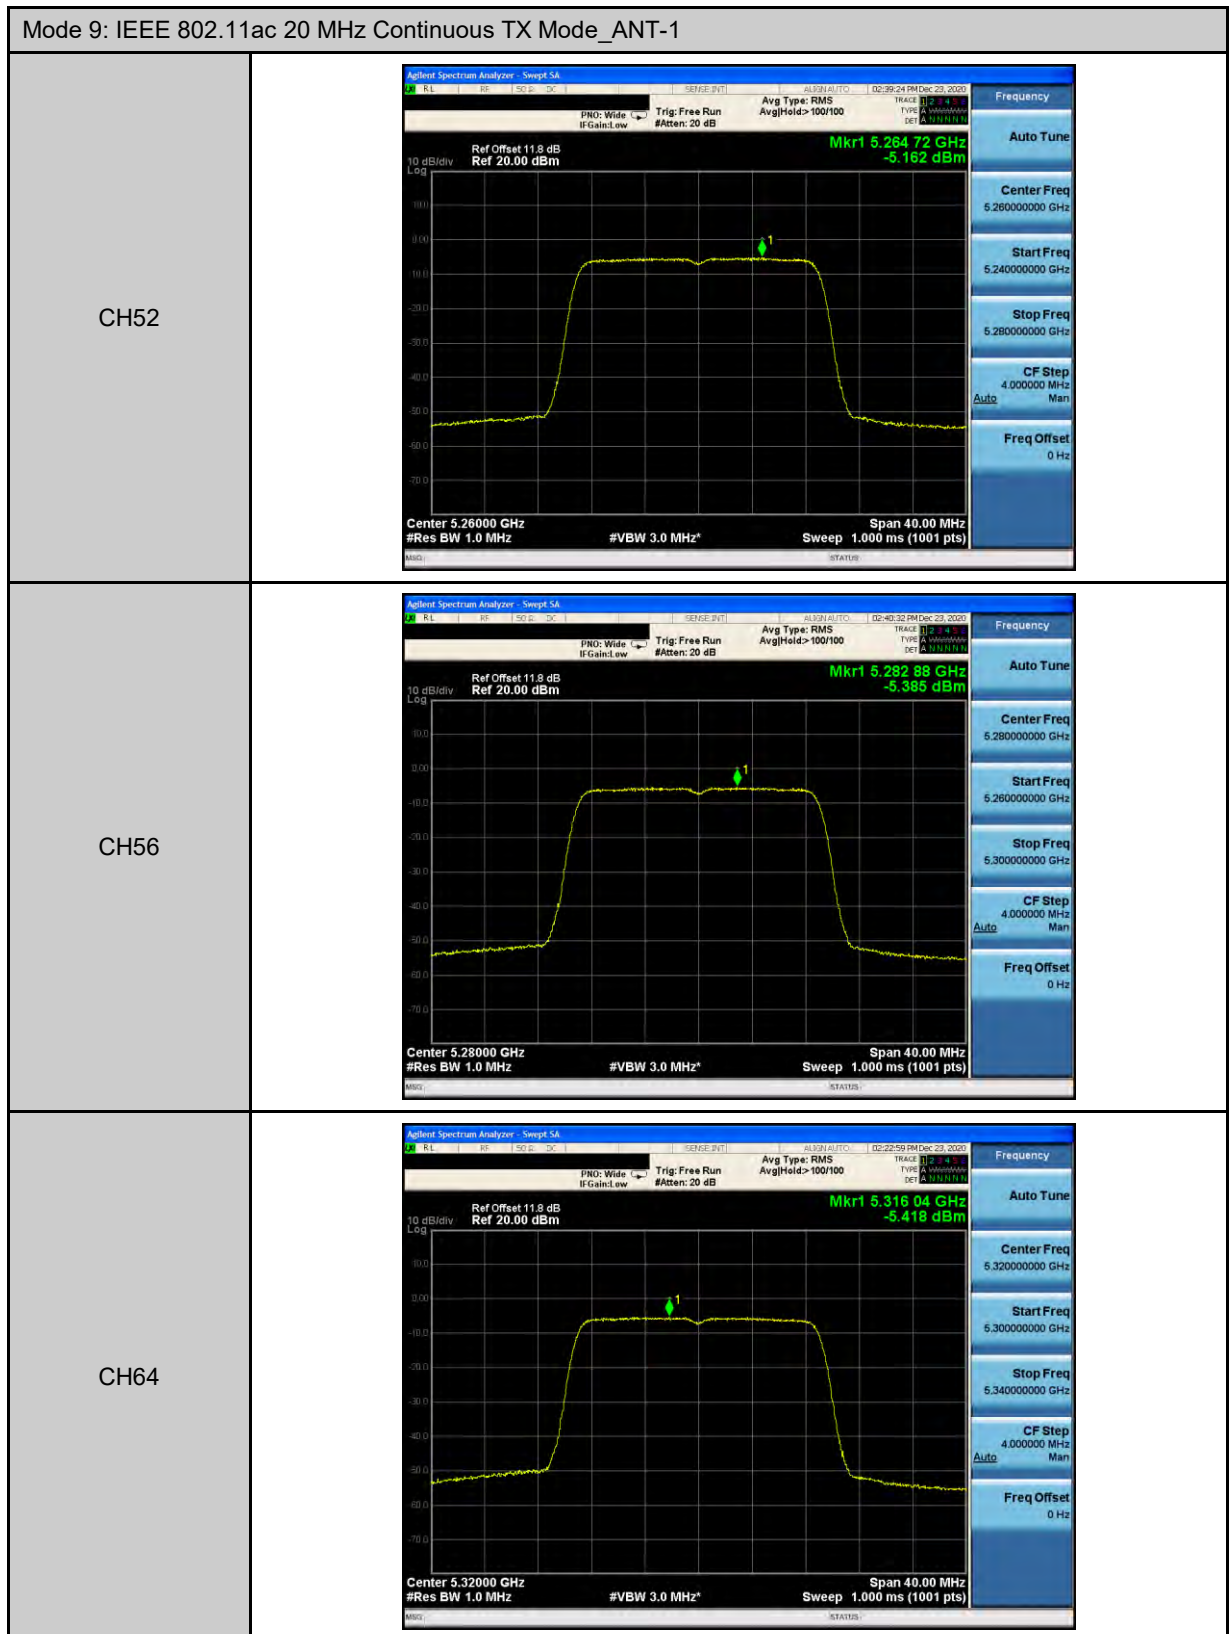


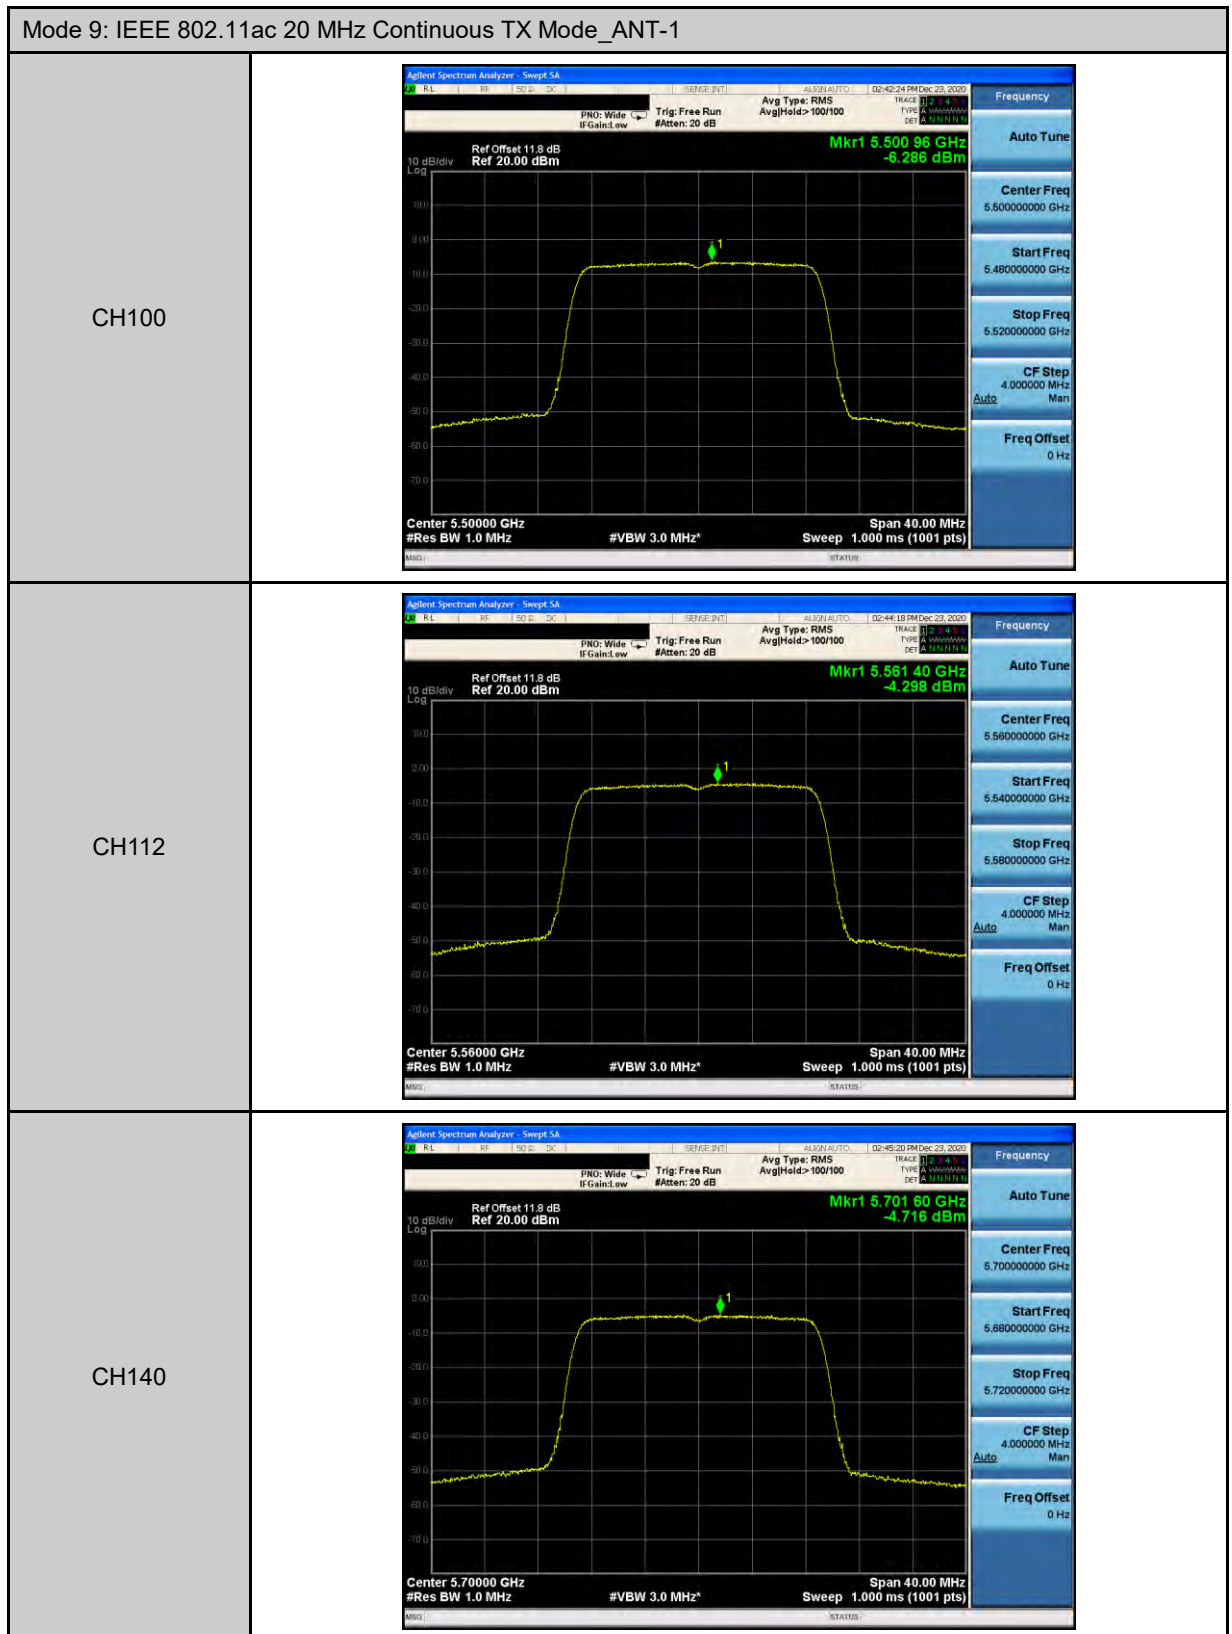


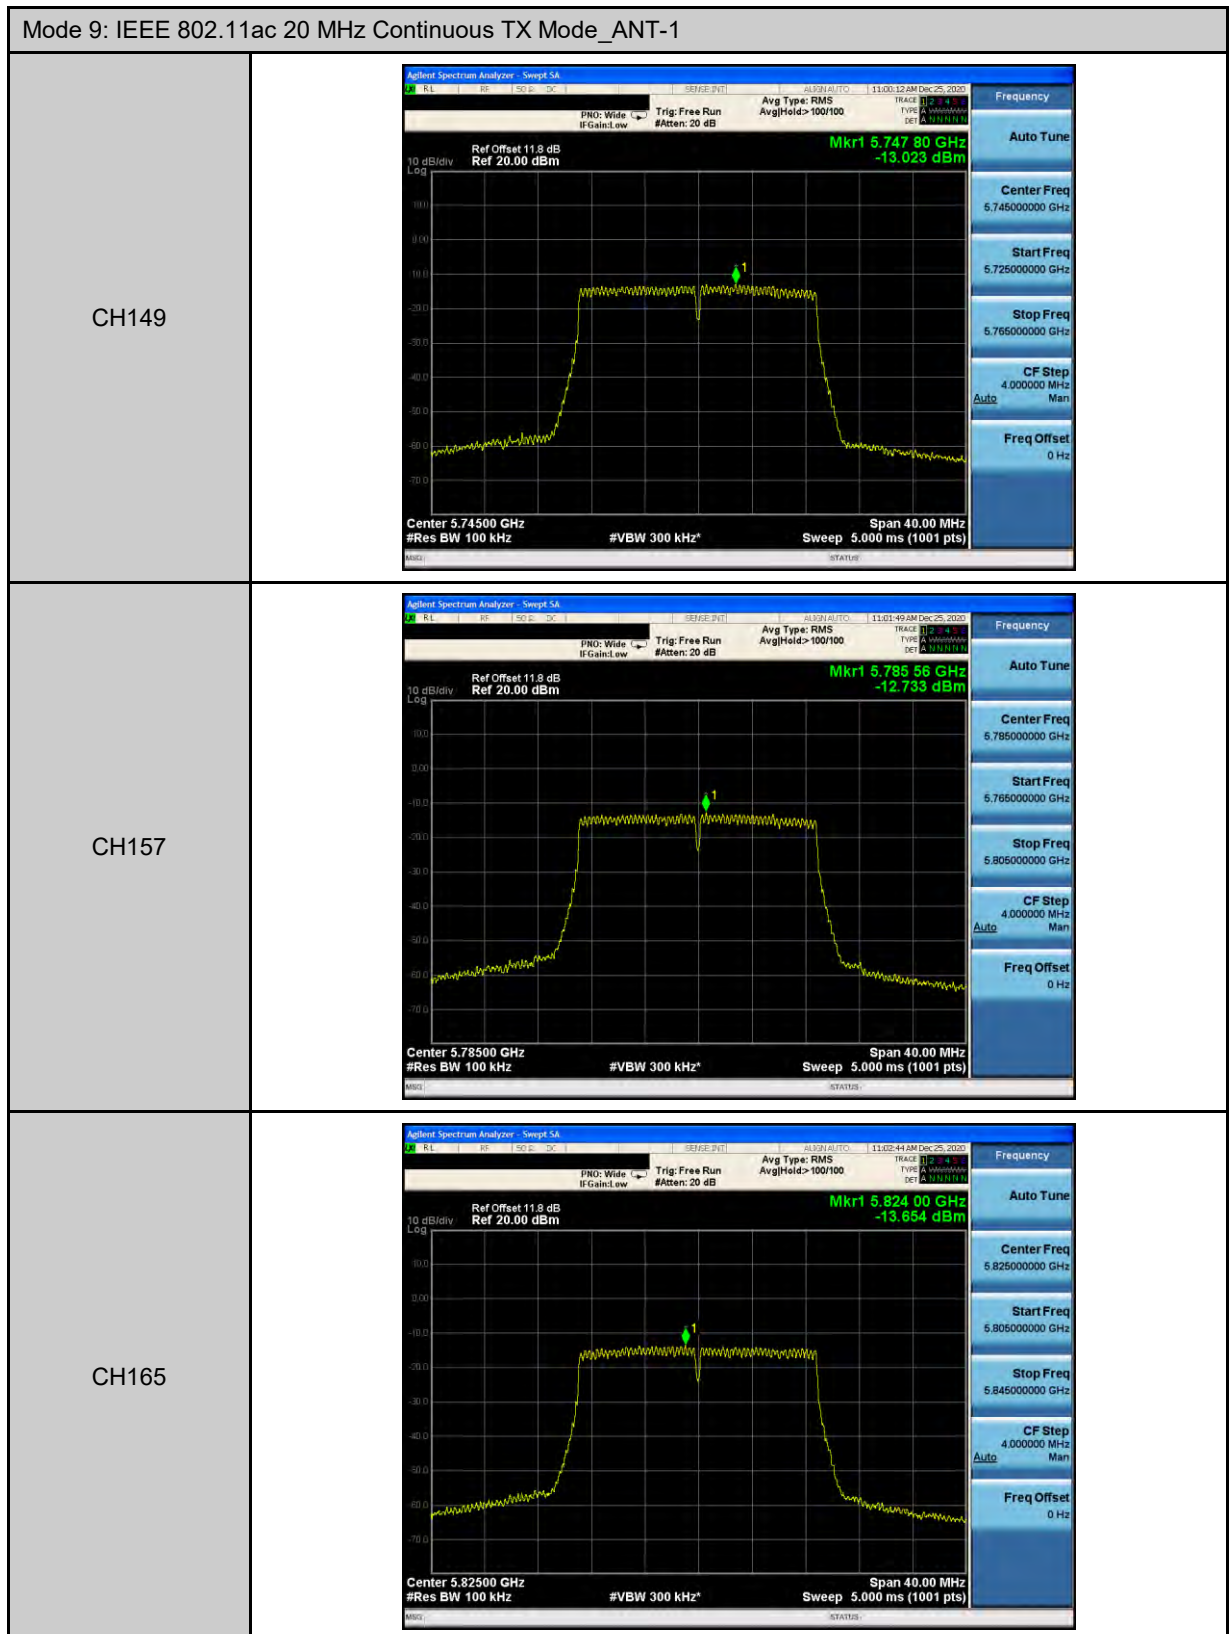


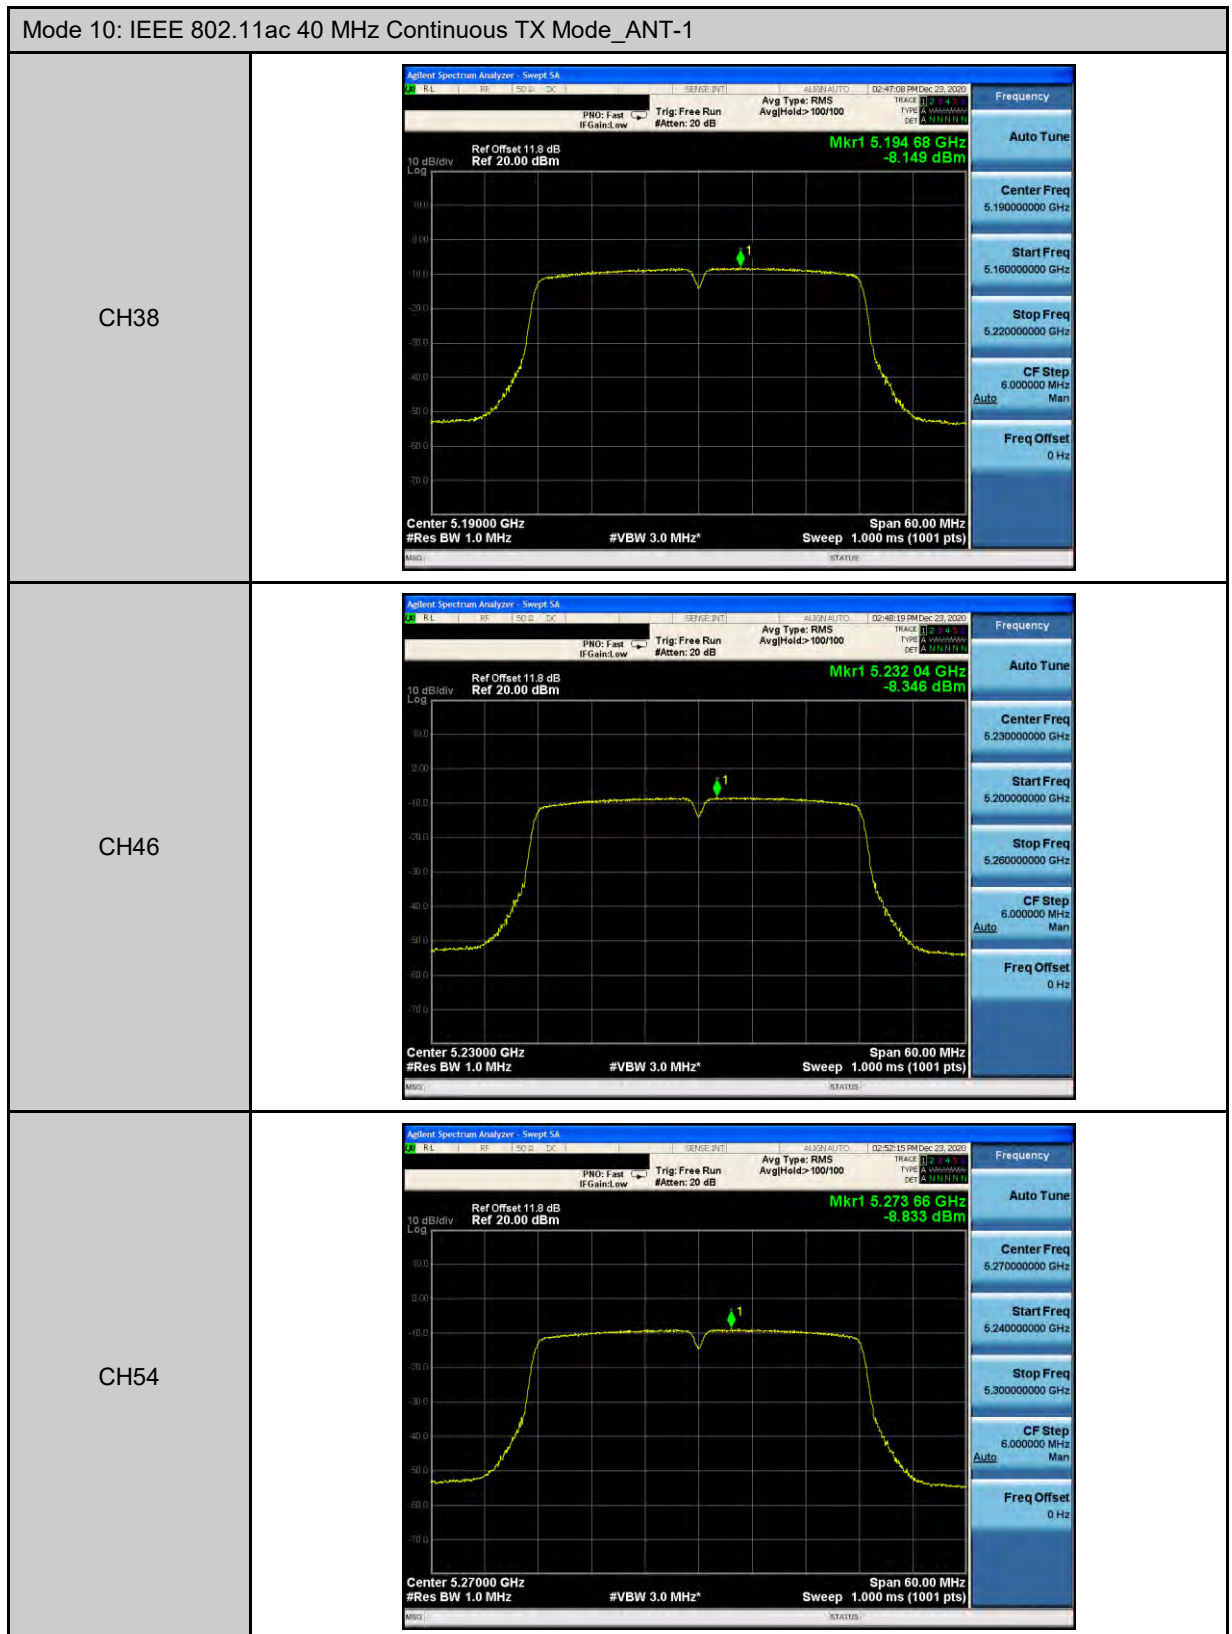


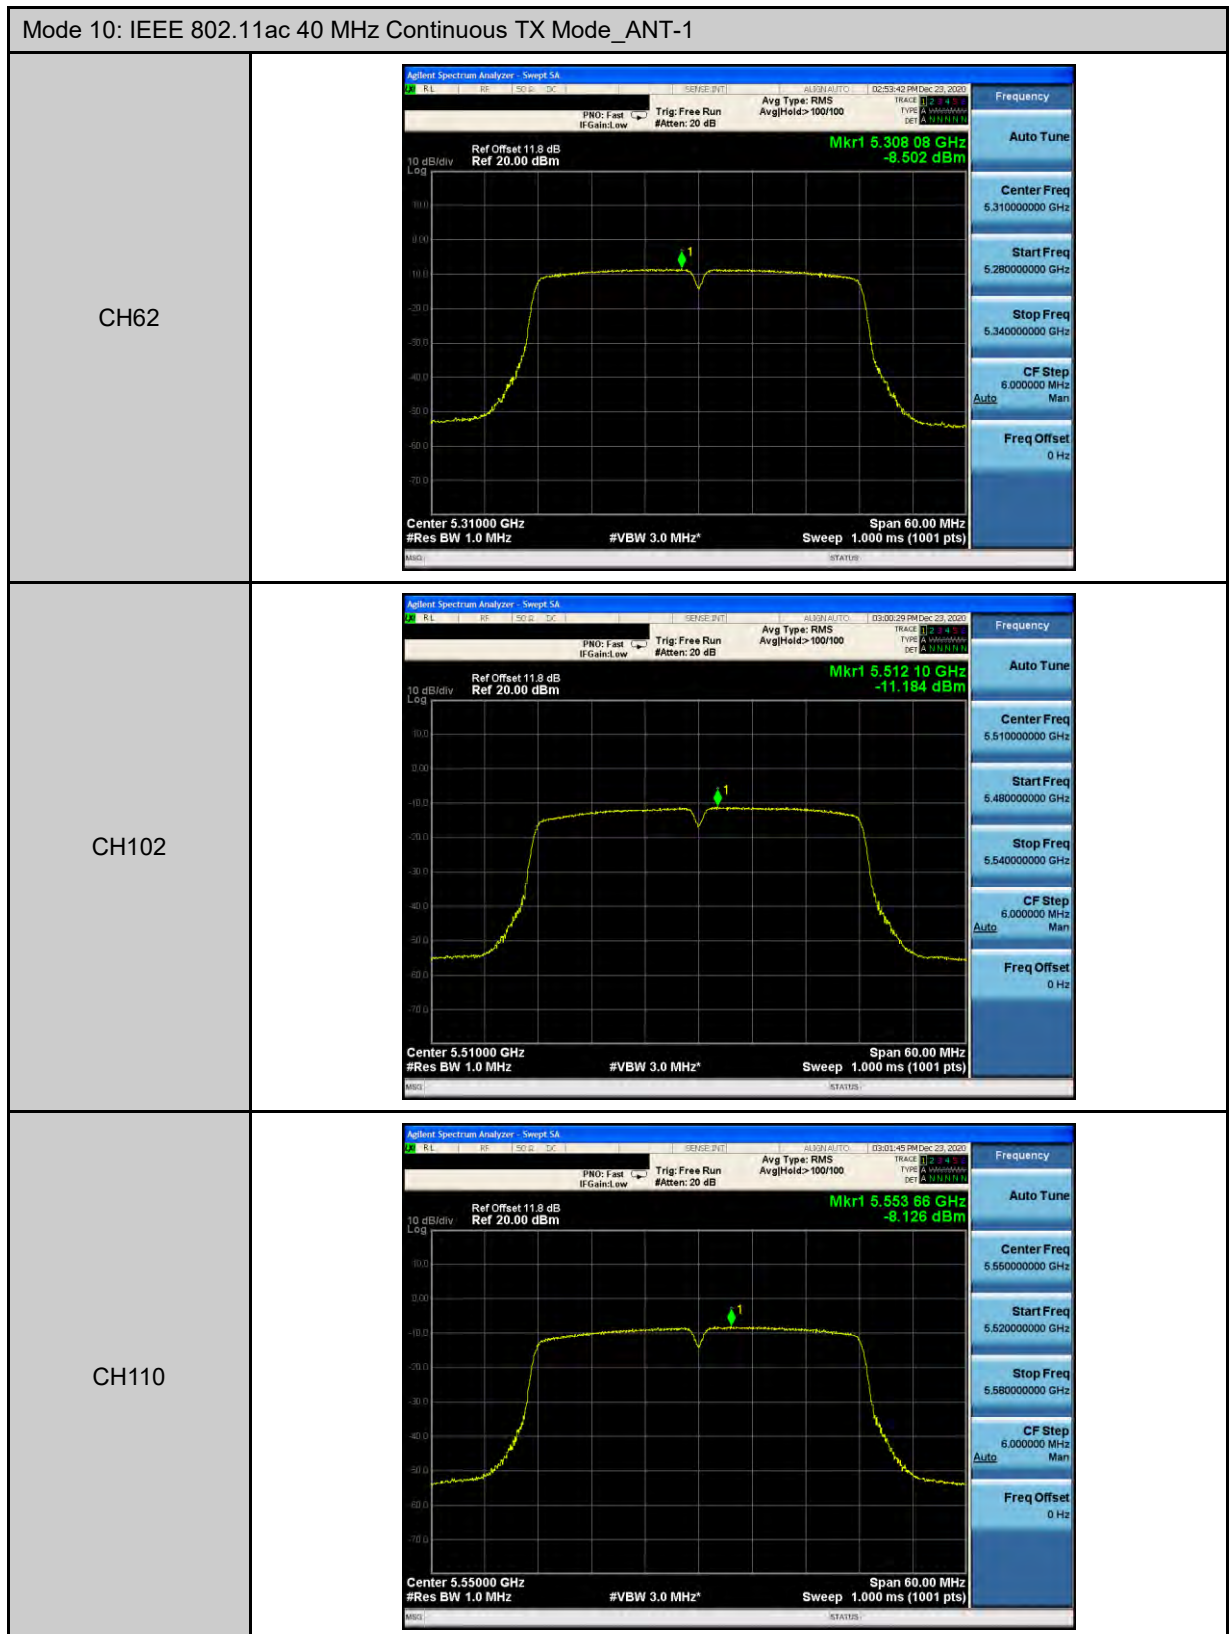


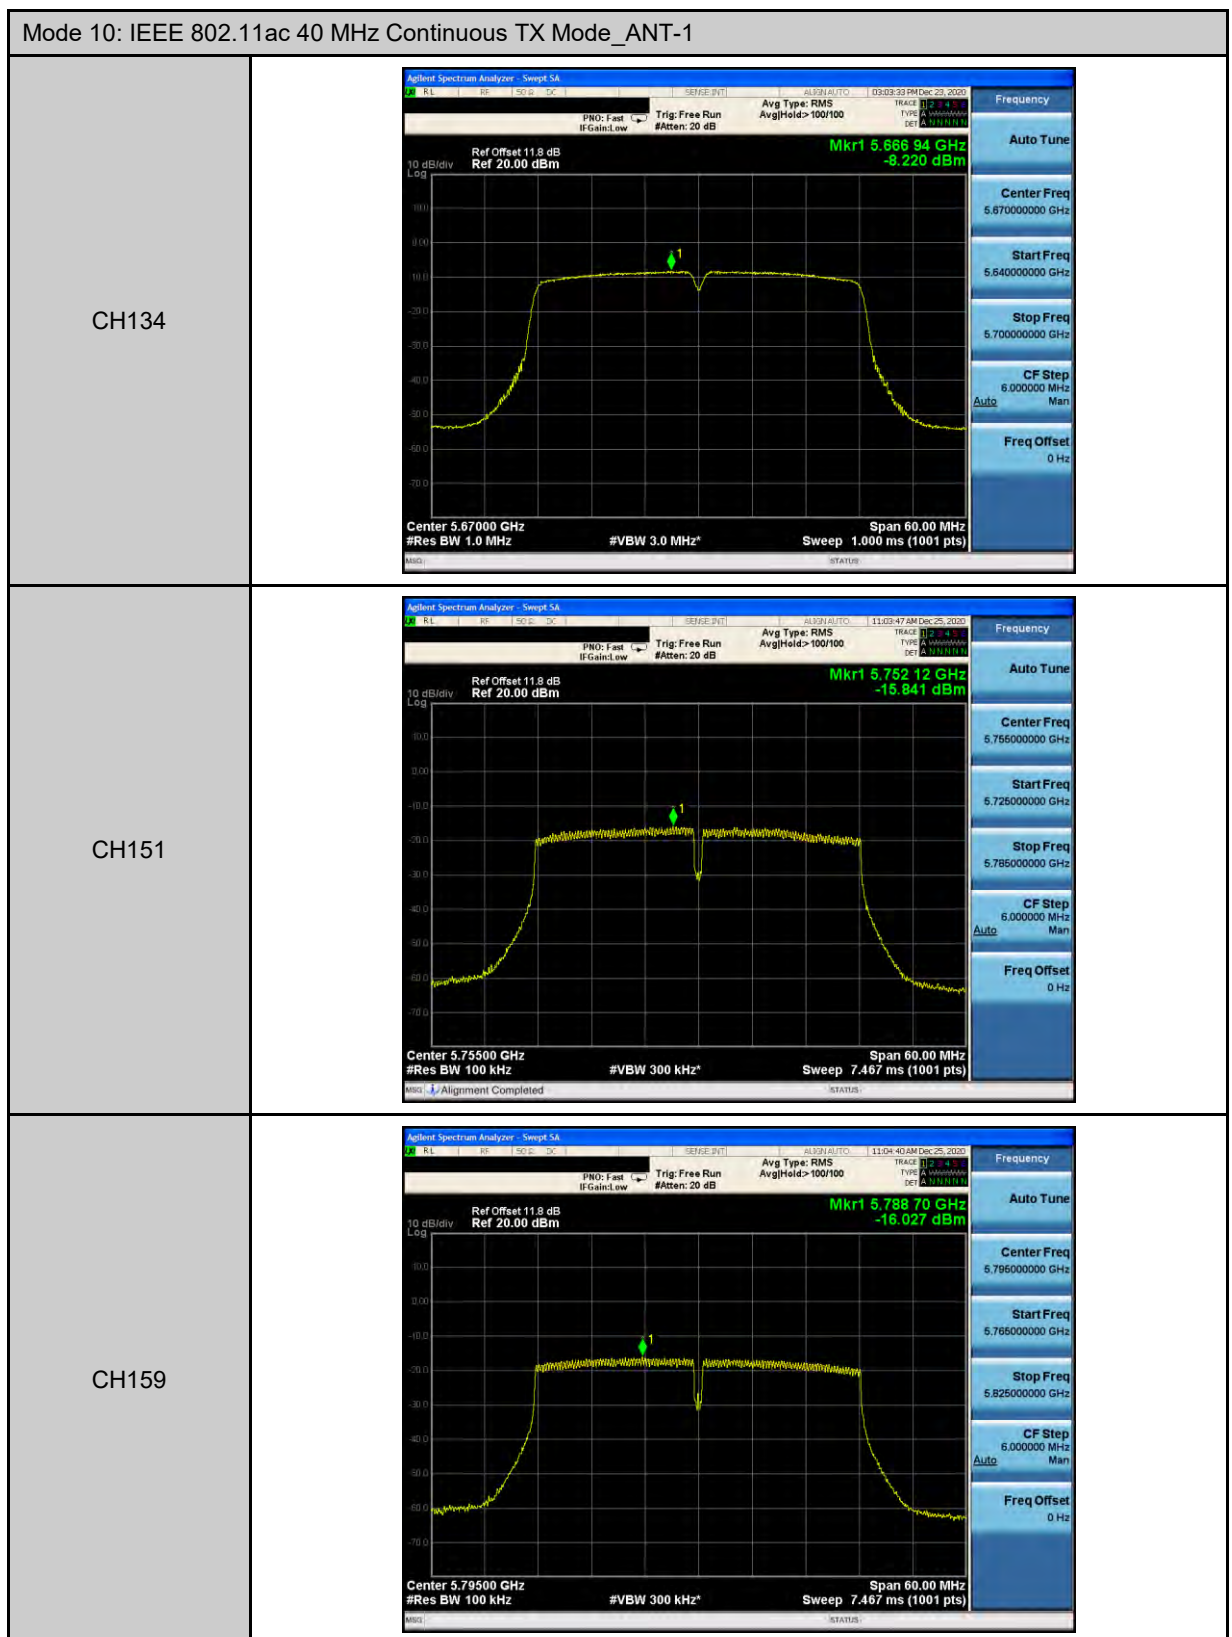


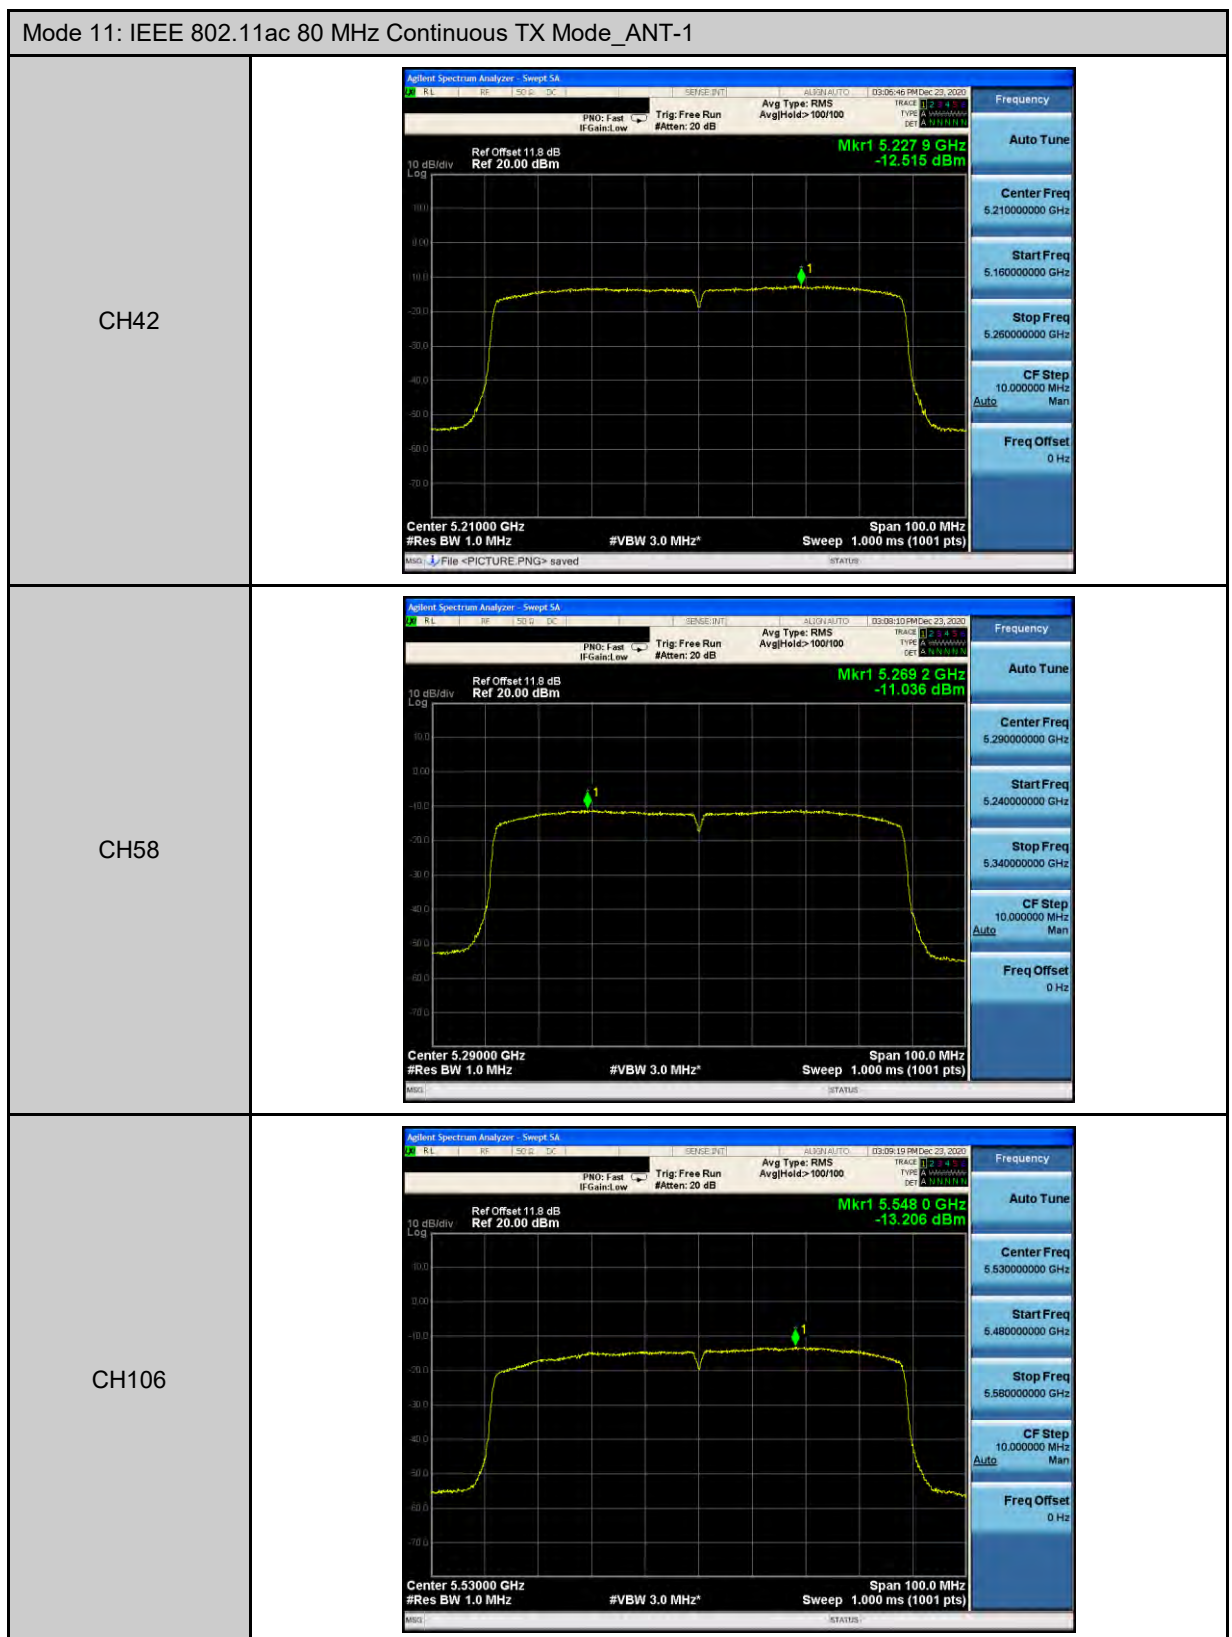


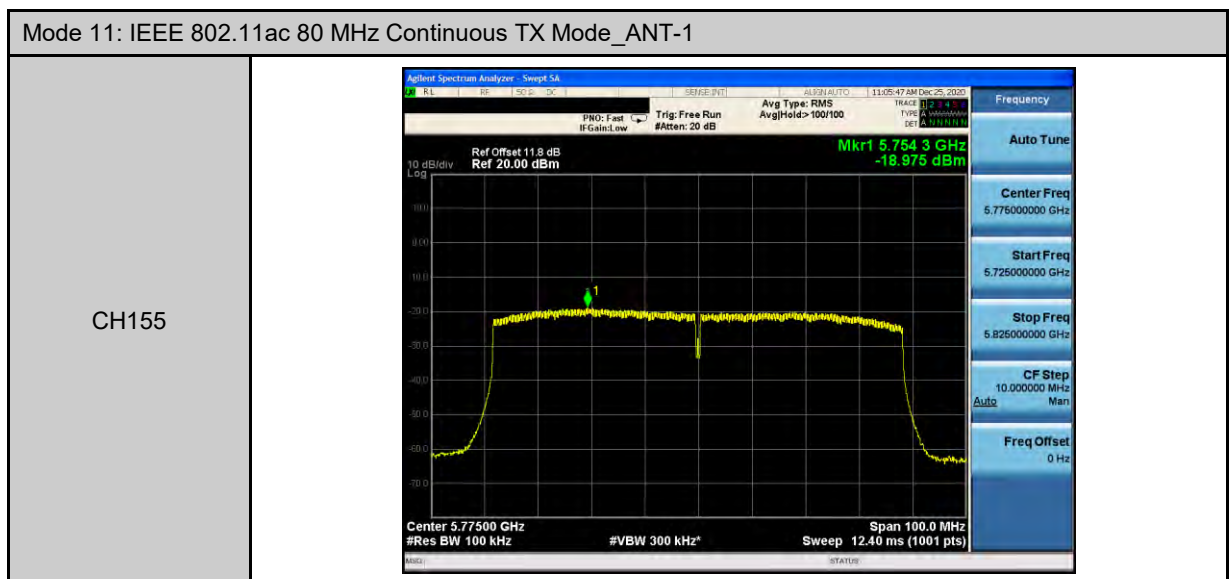






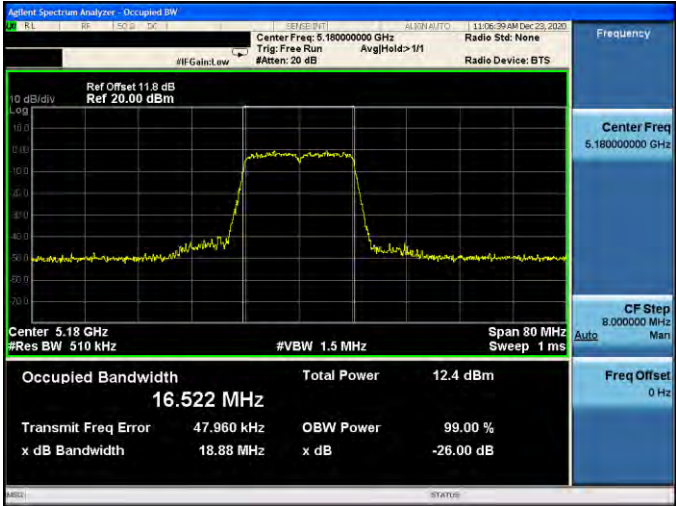
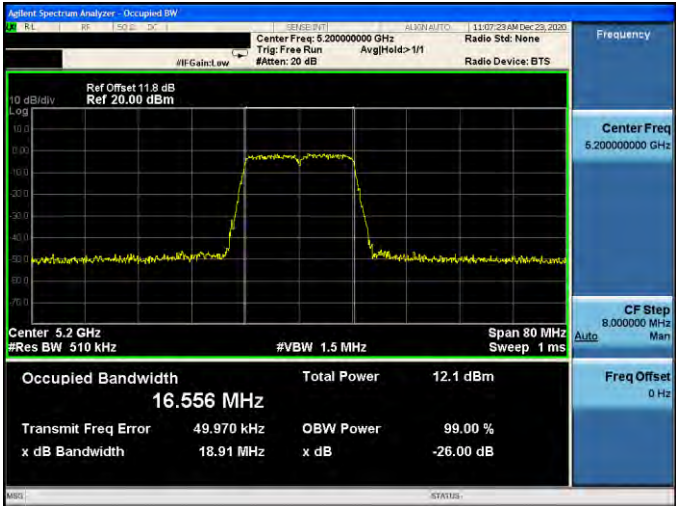
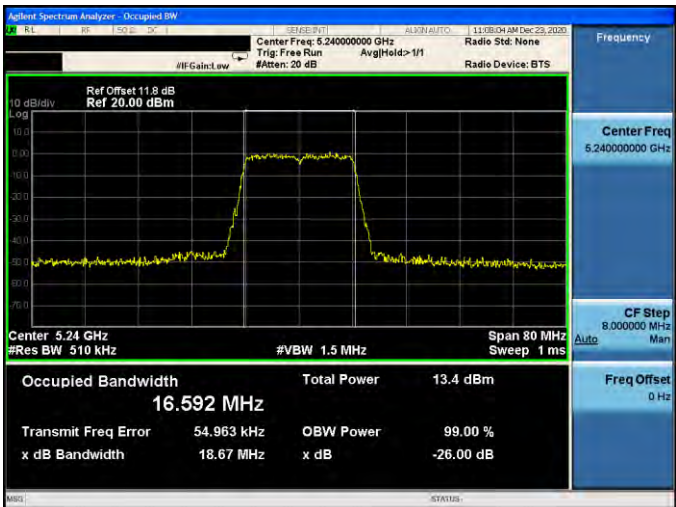


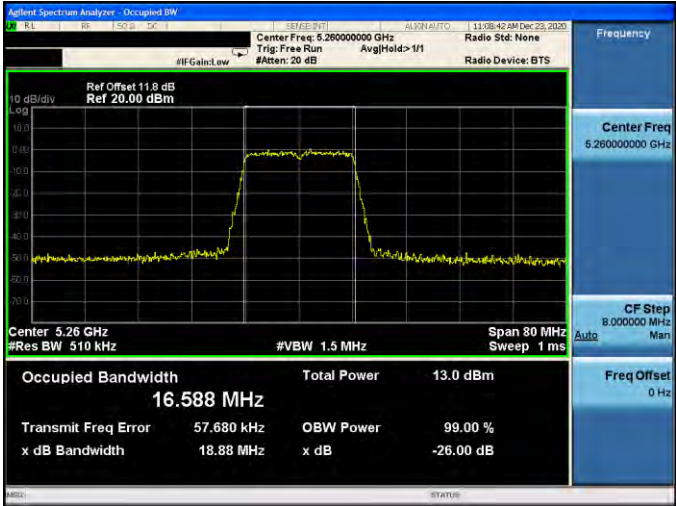
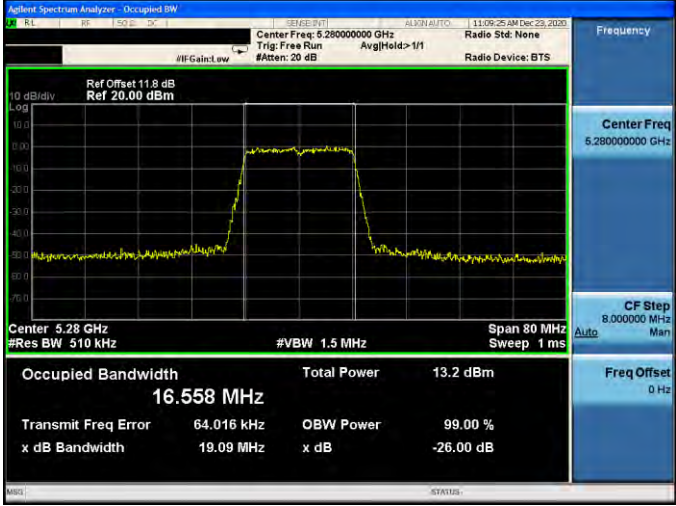


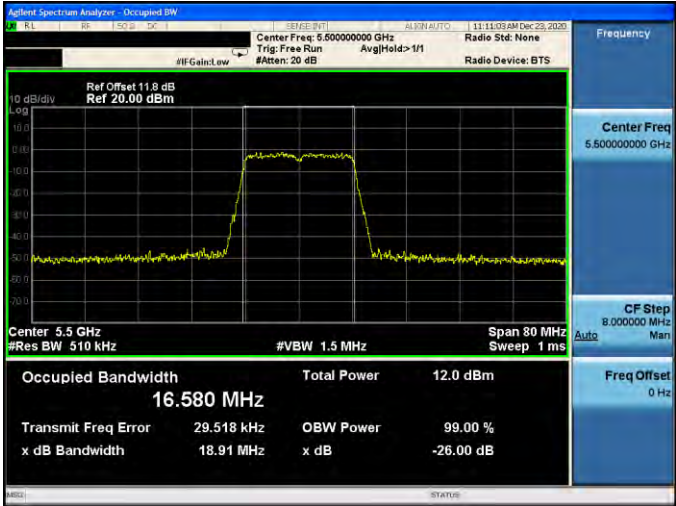
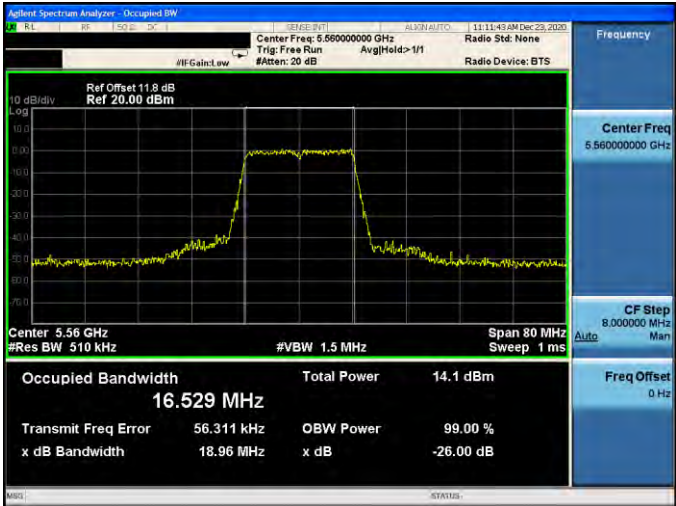


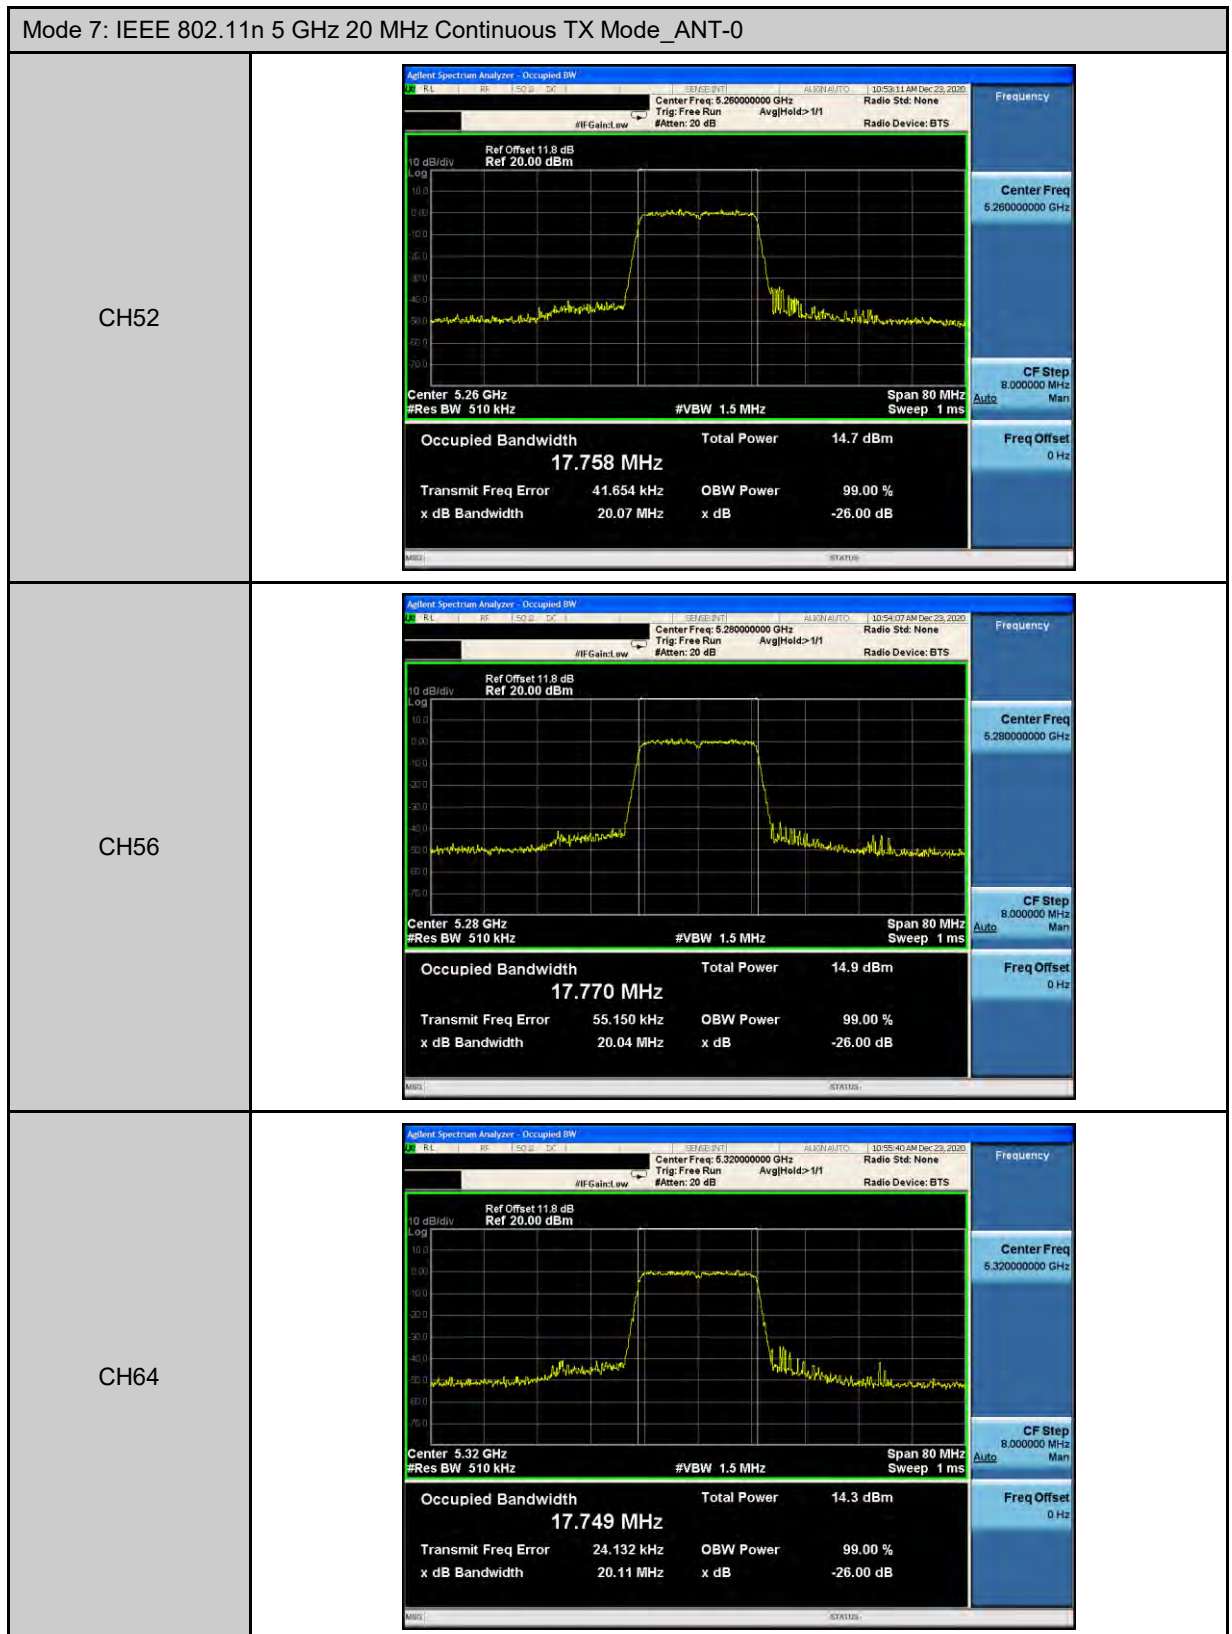
26 dB Bandwidth

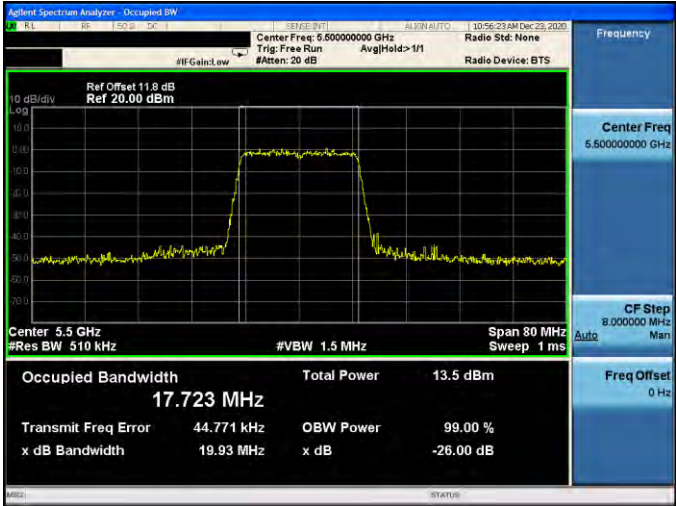
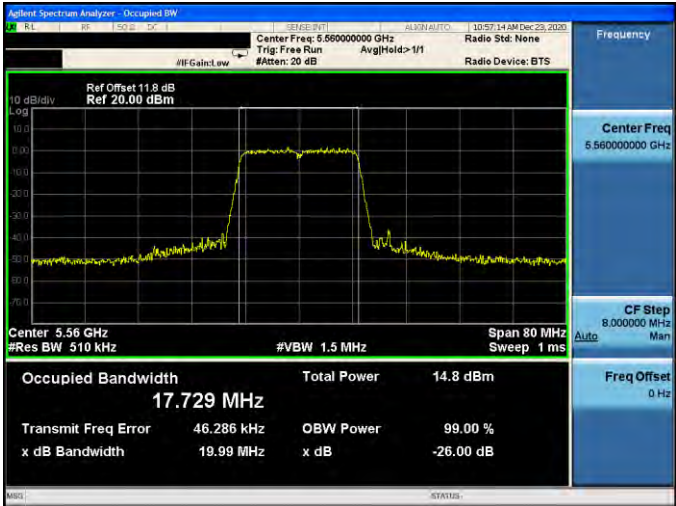
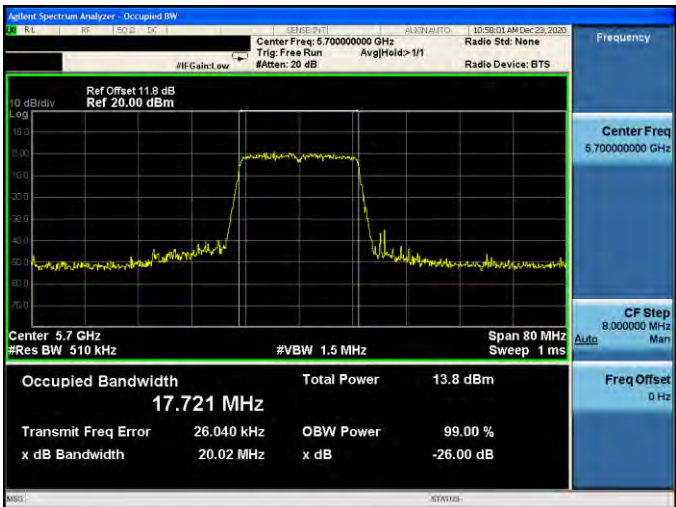
操作模式	頻道 (CH)	頻率 (MHz)	26 dB 頻寬量測值 (MHz)	
			ANT-0	ANT-1
Mode 6	36	5180.0	18.880	18.840
	40	5200.0	18.910	18.880
	48	5240.0	18.670	18.630
	52	5260.0	18.880	18.960
	56	5280.0	19.090	18.890
	64	5320.0	19.030	19.070
	100	5500.0	18.910	19.110
	112	5560.0	18.960	18.770
	140	5700.0	18.840	18.880
Mode 7	52	5260.0	20.070	19.720
	56	5280.0	20.040	19.600
	64	5320.0	20.110	19.710
	100	5500.0	19.930	19.530
	112	5560.0	19.990	19.630
	140	5700.0	20.020	19.660
Mode 8	54	5270.0	42.310	41.220
	62	5310.0	42.450	41.390
	102	5510.0	41.540	41.370
	110	5550.0	42.050	40.920
	134	5670.0	42.200	41.020
Mode 9	36	5180.0	19.970	20.010
	40	5200.0	20.010	19.960
	48	5240.0	19.880	20.010
	52	5260.0	20.200	19.840
	56	5280.0	19.940	19.940
	64	5320.0	19.980	19.970
	100	5500.0	20.120	19.880
	112	5560.0	19.660	20.060
	140	5700.0	19.890	19.920
Mode 10	38	5190.0	41.820	42.280
	46	5230.0	42.150	42.170
	54	5270.0	41.660	41.930
	62	5310.0	42.060	42.010
	102	5510.0	42.210	41.890
	110	5550.0	41.670	41.950
	134	5670.0	41.990	41.920
Mode 11	42	5210.0	80.760	81.750
	58	5290.0	80.930	80.990
	106	5530.0	81.070	80.860

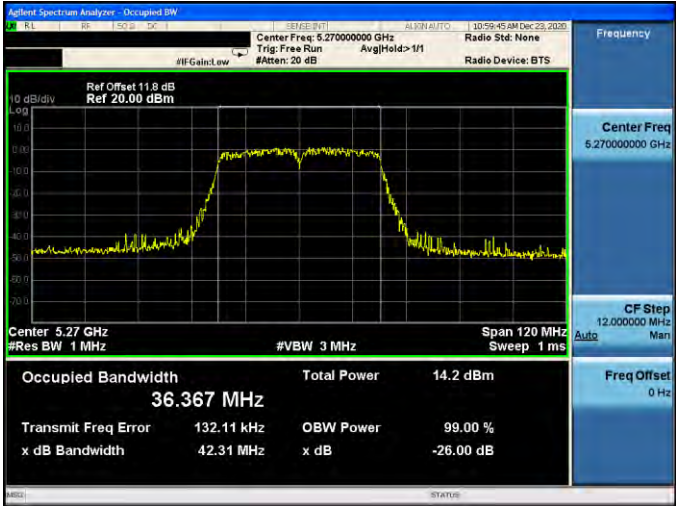
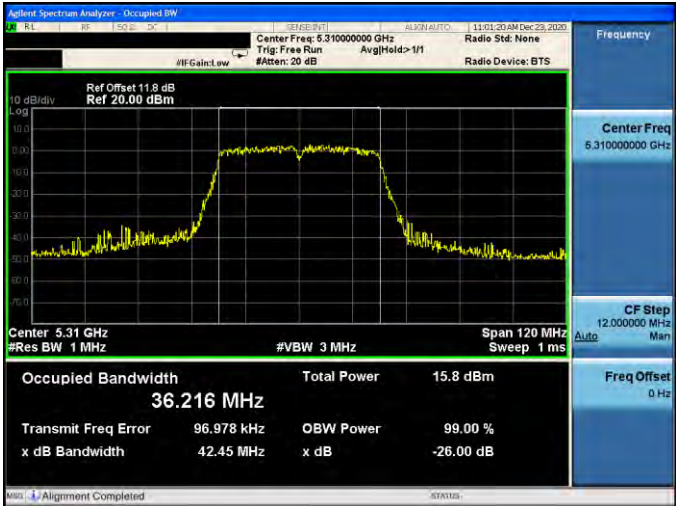
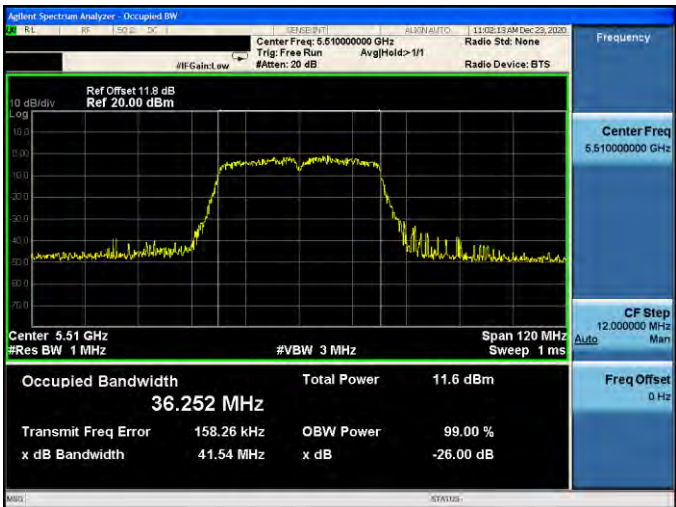
Mode 6: IEEE 802.11a Continuous TX Mode_ANT-0	
CH36	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.18000000 GHz Trig: Free Run AvgHld: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm 10 dB/div Log Center 5.18 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 16.522 MHz Total Power 12.4 dBm Transmit Freq Error 47.960 kHz OBW Power 99.00 % x dB Bandwidth 18.88 MHz x dB -26.00 dB
CH40	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.20000000 GHz Trig: Free Run AvgHld: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm 10 dB/div Log Center 5.2 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 16.556 MHz Total Power 12.1 dBm Transmit Freq Error 49.970 kHz OBW Power 99.00 % x dB Bandwidth 18.91 MHz x dB -26.00 dB
CH48	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.24000000 GHz Trig: Free Run AvgHld: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm 10 dB/div Log Center 5.24 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 16.592 MHz Total Power 13.4 dBm Transmit Freq Error 54.963 kHz OBW Power 99.00 % x dB Bandwidth 18.67 MHz x dB -26.00 dB

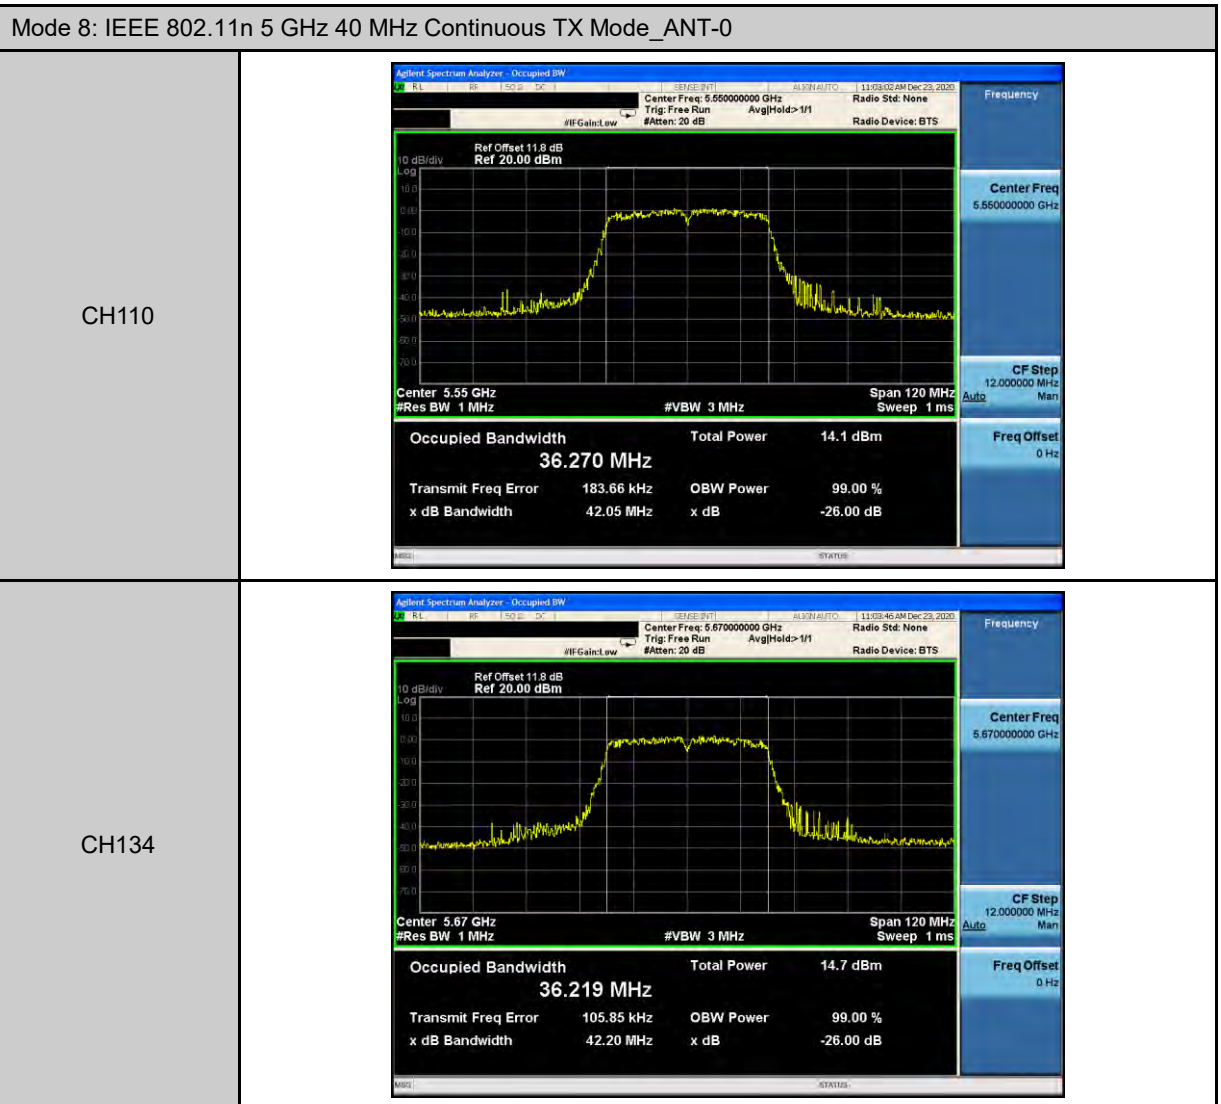
Mode 6: IEEE 802.11a Continuous TX Mode_ANT-0	
CH52	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.260000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm 10 dB/div Log Center 5.26 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 16.588 MHz Total Power 13.0 dBm Transmit Freq Error 57.680 kHz OBW Power 99.00 % x dB Bandwidth 18.88 MHz x dB -26.00 dB Frequency Center Freq 5.260000000 GHz CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz
CH56	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.280000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm 10 dB/div Log Center 5.28 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 16.558 MHz Total Power 13.2 dBm Transmit Freq Error 64.016 kHz OBW Power 99.00 % x dB Bandwidth 19.09 MHz x dB -26.00 dB Frequency Center Freq 5.280000000 GHz CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz
CH64	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.320000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm 10 dB/div Log Center 5.32 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 16.553 MHz Total Power 12.0 dBm Transmit Freq Error 37.734 kHz OBW Power 99.00 % x dB Bandwidth 19.03 MHz x dB -26.00 dB Frequency Center Freq 5.320000000 GHz CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz

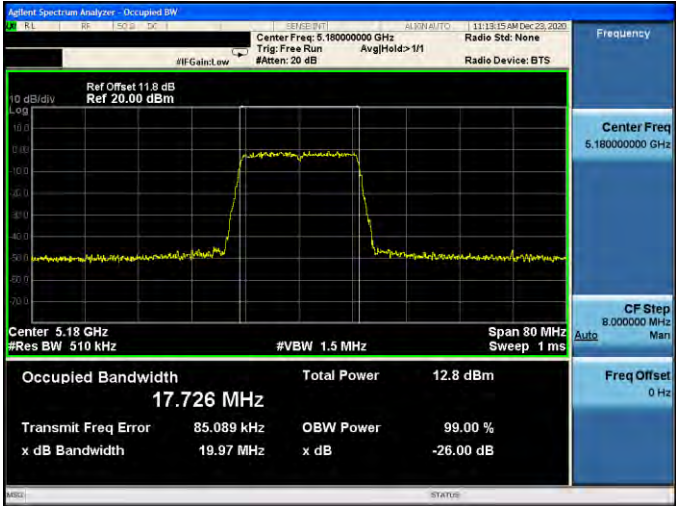
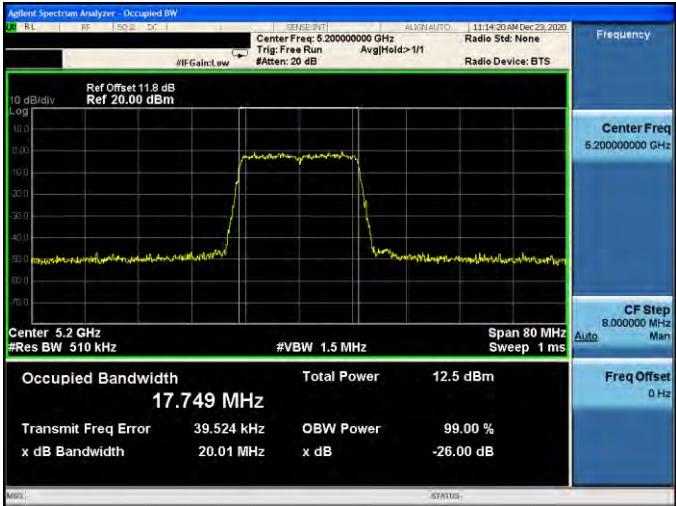
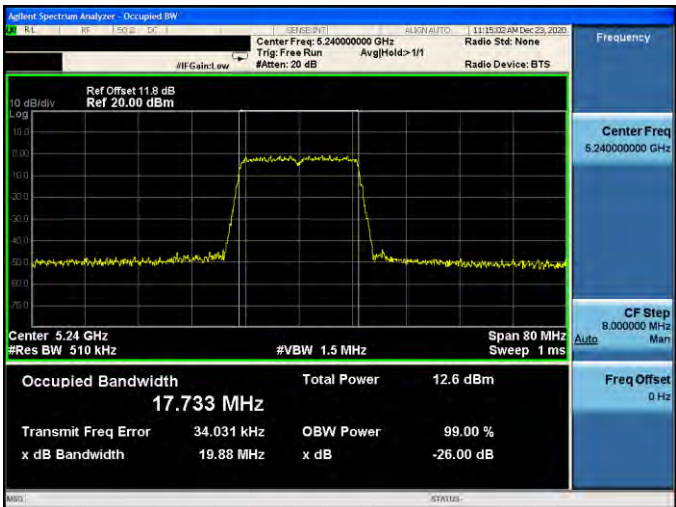
Mode 6: IEEE 802.11a Continuous TX Mode_ANT-0	
CH100	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.500000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.5 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 16.580 MHz Total Power 12.0 dBm Transmit Freq Error 29.518 kHz OBW Power 99.00 % x dB Bandwidth 18.91 MHz x dB -26.00 dB Frequency Center Freq 5.500000000 GHz CF Step 8.000000 MHz Freq Offset 0 Hz
CH112	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.560000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.56 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 16.529 MHz Total Power 14.1 dBm Transmit Freq Error 56.311 kHz OBW Power 99.00 % x dB Bandwidth 18.96 MHz x dB -26.00 dB Frequency Center Freq 5.560000000 GHz CF Step 8.000000 MHz Freq Offset 0 Hz
CH140	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.700000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.7 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 16.561 MHz Total Power 13.2 dBm Transmit Freq Error 49.353 kHz OBW Power 99.00 % x dB Bandwidth 18.84 MHz x dB -26.00 dB Frequency Center Freq 5.700000000 GHz CF Step 8.000000 MHz Freq Offset 0 Hz

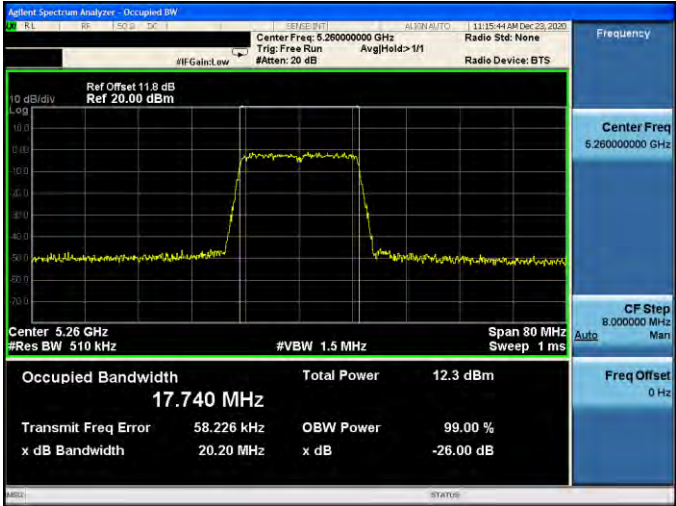
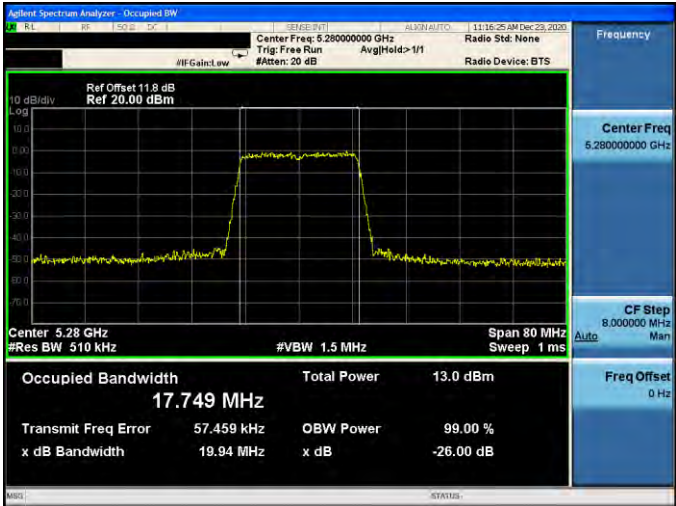
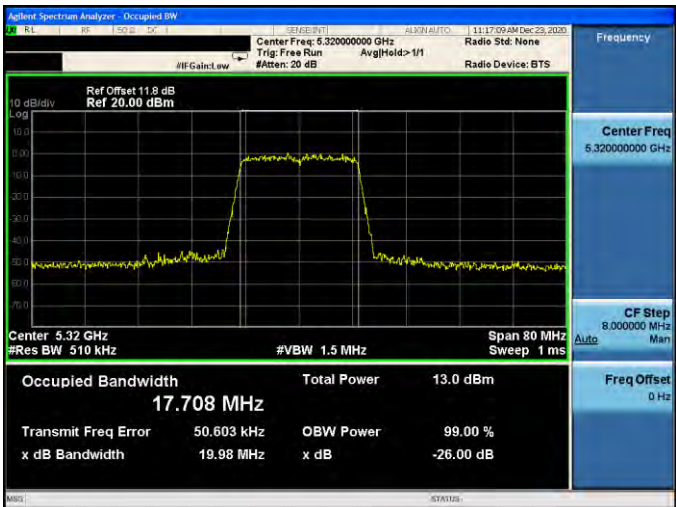


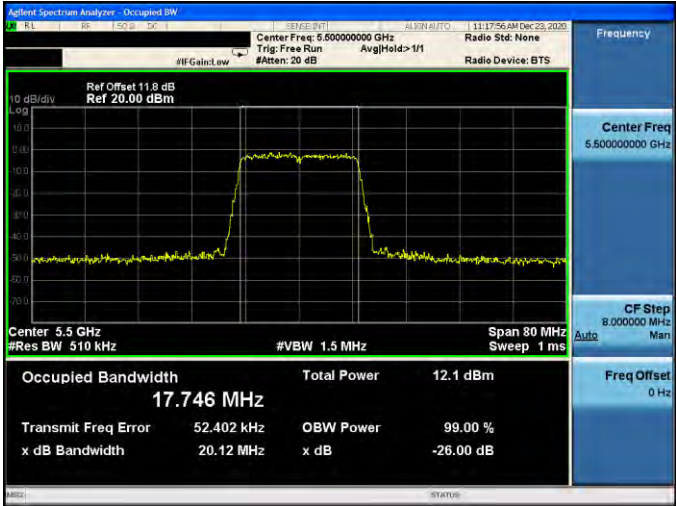
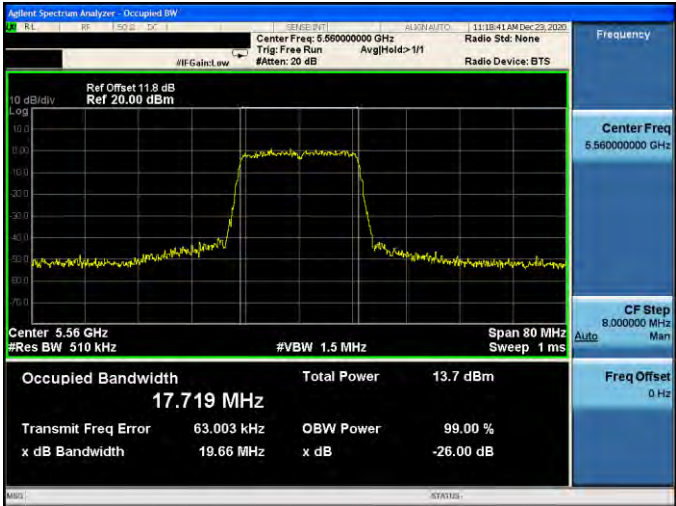
Mode 7: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-0	
CH100	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.50000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.5 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.723 MHz Total Power 13.5 dBm Transmit Freq Error 44.771 kHz OBW Power 99.00 % x dB Bandwidth 19.93 MHz x dB -26.00 dB Frequency Center Freq 5.50000000 GHz CF Step 8.00000 MHz Freq Offset 0 Hz
CH112	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.56000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.56 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.729 MHz Total Power 14.8 dBm Transmit Freq Error 46.286 kHz OBW Power 99.00 % x dB Bandwidth 19.99 MHz x dB -26.00 dB Frequency Center Freq 5.56000000 GHz CF Step 8.00000 MHz Freq Offset 0 Hz
CH140	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.70000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.7 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.721 MHz Total Power 13.8 dBm Transmit Freq Error 26.040 kHz OBW Power 99.00 % x dB Bandwidth 20.02 MHz x dB -26.00 dB Frequency Center Freq 5.70000000 GHz CF Step 8.00000 MHz Freq Offset 0 Hz

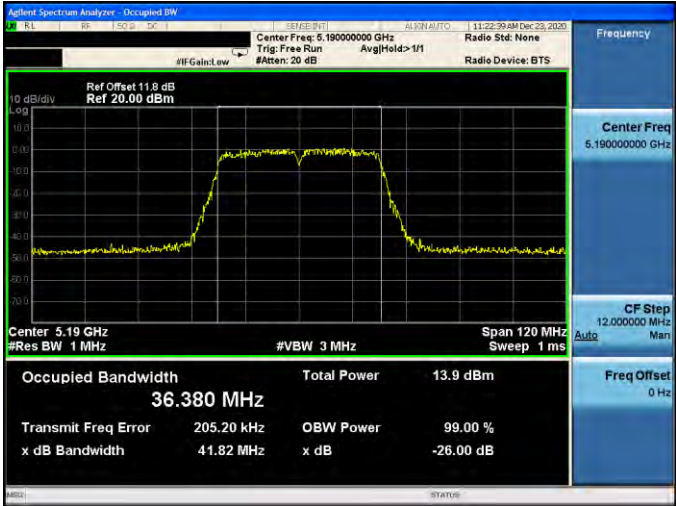
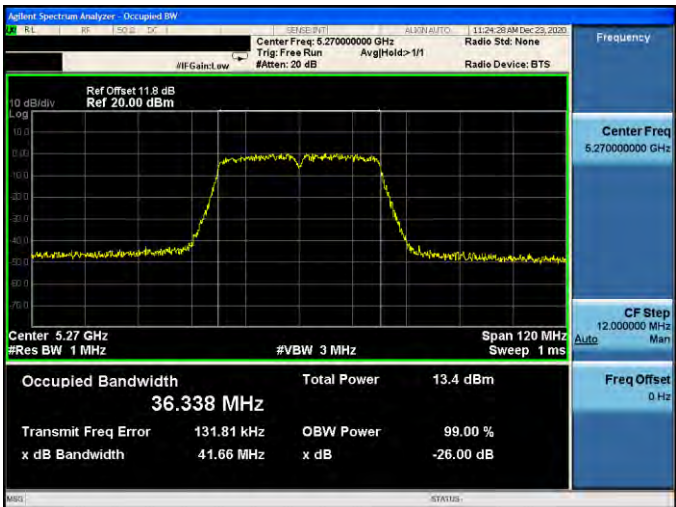
Mode 8: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-0	
CH54	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.27000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.27 GHz #Res BW 1 MHz #VBW 3 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.367 MHz Total Power 14.2 dBm Transmit Freq Error 132.11 kHz OBW Power 99.00 % x dB Bandwidth 42.31 MHz x dB -26.00 dB Center Freq 5.27000000 GHz CF Step 12.00000 MHz Freq Offset 0 Hz
CH62	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.31000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.31 GHz #Res BW 1 MHz #VBW 3 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.216 MHz Total Power 15.8 dBm Transmit Freq Error 96.978 kHz OBW Power 99.00 % x dB Bandwidth 42.45 MHz x dB -26.00 dB Center Freq 5.31000000 GHz CF Step 12.00000 MHz Freq Offset 0 Hz
CH102	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.51000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.51 GHz #Res BW 1 MHz #VBW 3 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.252 MHz Total Power 11.6 dBm Transmit Freq Error 158.26 kHz OBW Power 99.00 % x dB Bandwidth 41.54 MHz x dB -26.00 dB Center Freq 5.51000000 GHz CF Step 12.00000 MHz Freq Offset 0 Hz

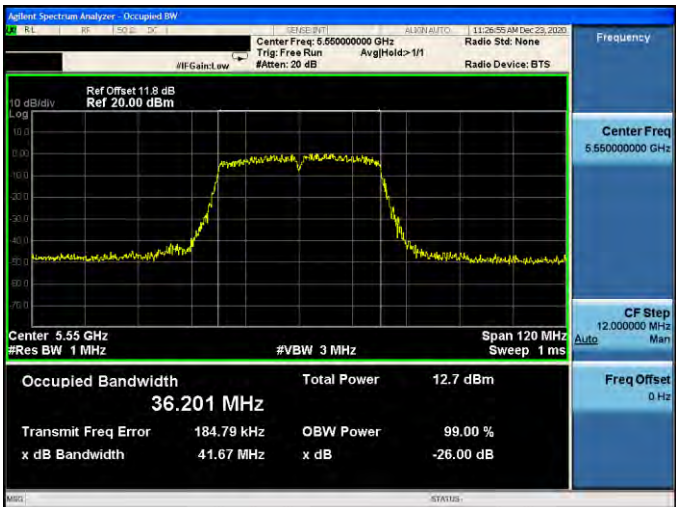


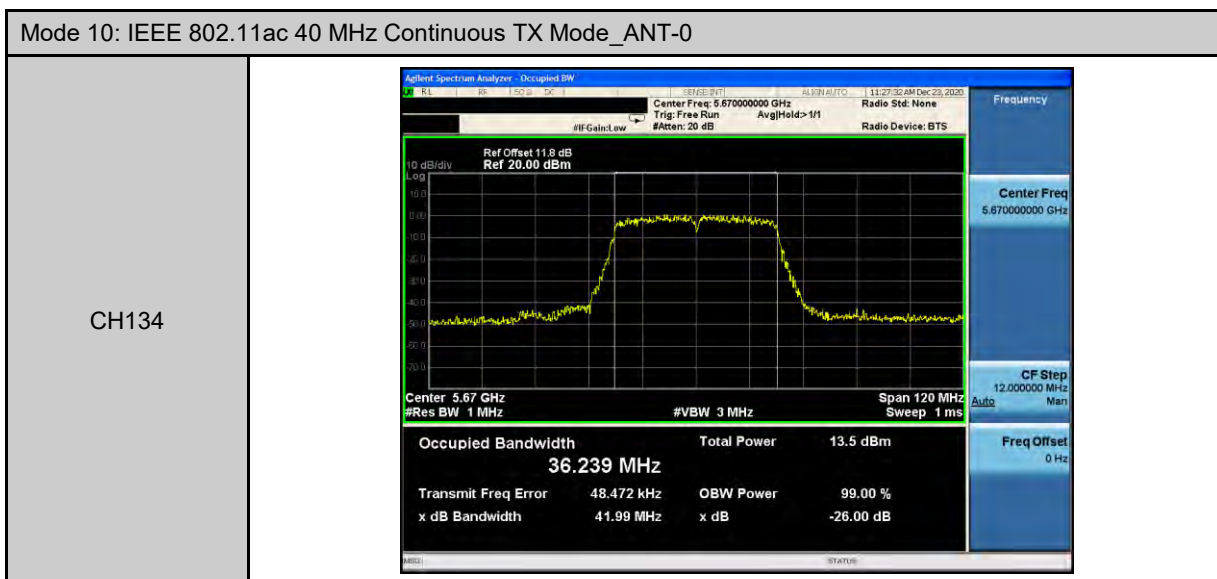
Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0	
CH36	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.18000000 GHz Ref Offset: 11.8 dB Ref: 20.00 dBm Occupied Bandwidth: 17.726 MHz Total Power: 12.8 dBm Transmit Freq Error: 85.089 kHz OBW Power: 99.00 % x dB Bandwidth: 19.97 MHz x dB: -26.00 dB
CH40	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.20000000 GHz Ref Offset: 11.8 dB Ref: 20.00 dBm Occupied Bandwidth: 17.749 MHz Total Power: 12.5 dBm Transmit Freq Error: 39.524 kHz OBW Power: 99.00 % x dB Bandwidth: 20.01 MHz x dB: -26.00 dB
CH48	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.24000000 GHz Ref Offset: 11.8 dB Ref: 20.00 dBm Occupied Bandwidth: 17.733 MHz Total Power: 12.6 dBm Transmit Freq Error: 34.031 kHz OBW Power: 99.00 % x dB Bandwidth: 19.88 MHz x dB: -26.00 dB

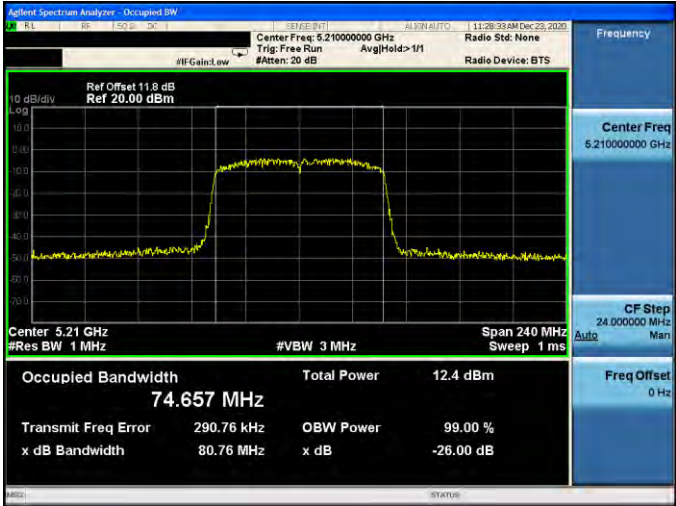
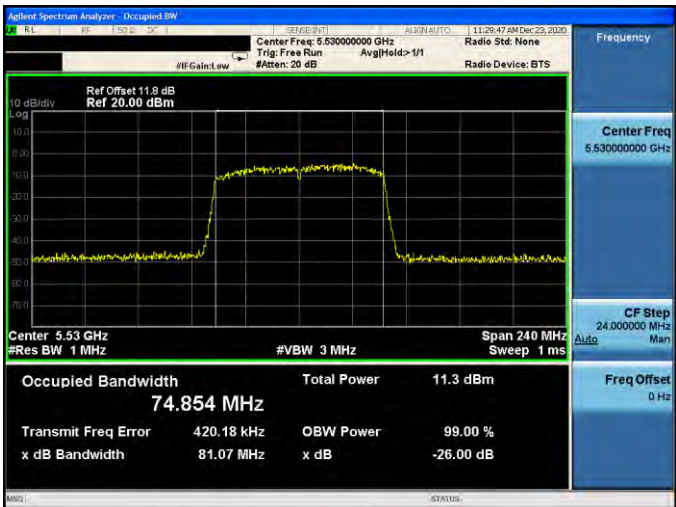
Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0	
CH52	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.260000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.26 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.740 MHz Total Power 12.3 dBm Transmit Freq Error 58.226 kHz OBW Power 99.00 % x dB Bandwidth 20.20 MHz x dB -26.00 dB
CH56	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.280000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.28 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.749 MHz Total Power 13.0 dBm Transmit Freq Error 57.459 kHz OBW Power 99.00 % x dB Bandwidth 19.94 MHz x dB -26.00 dB
CH64	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.320000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.32 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.708 MHz Total Power 13.0 dBm Transmit Freq Error 50.603 kHz OBW Power 99.00 % x dB Bandwidth 19.98 MHz x dB -26.00 dB

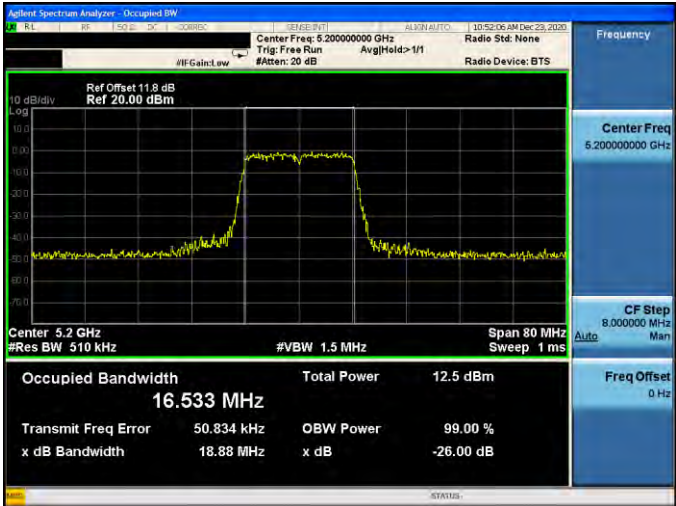
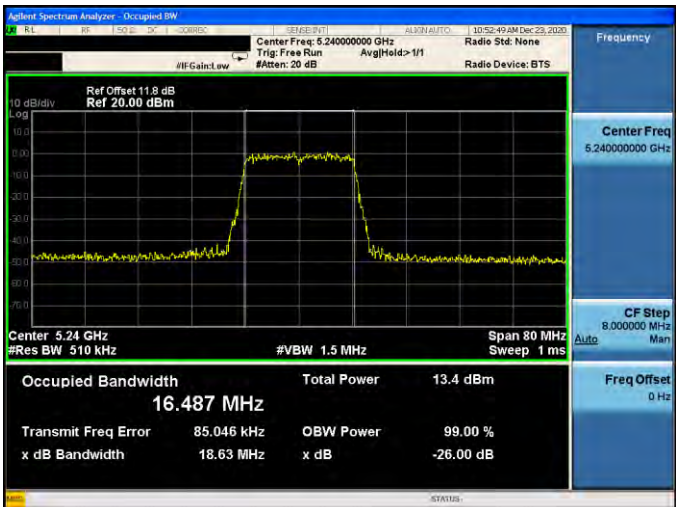
Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0	
CH100	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.50000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.5 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.746 MHz Total Power 12.1 dBm Transmit Freq Error 52.402 kHz OBW Power 99.00 % x dB Bandwidth 20.12 MHz x dB -26.00 dB Frequency Center Freq 5.50000000 GHz CF Step 8.000000 MHz Freq Offset 0 Hz
CH112	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.56000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.56 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.719 MHz Total Power 13.7 dBm Transmit Freq Error 63.003 kHz OBW Power 99.00 % x dB Bandwidth 19.66 MHz x dB -26.00 dB Frequency Center Freq 5.56000000 GHz CF Step 8.000000 MHz Freq Offset 0 Hz
CH140	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.70000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.7 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.732 MHz Total Power 13.6 dBm Transmit Freq Error 43.038 kHz OBW Power 99.00 % x dB Bandwidth 19.89 MHz x dB -26.00 dB Frequency Center Freq 5.70000000 GHz CF Step 8.000000 MHz Freq Offset 0 Hz

Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0	
CH38	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.190000000 GHz Ref Offset: 11.8 dB Ref: 20.00 dBm Occupied Bandwidth: 36.380 MHz Total Power: 13.9 dBm Transmit Freq Error: 205.20 kHz OBW Power: 99.00 % x dB Bandwidth: 41.82 MHz x dB: -26.00 dB
CH46	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.230000000 GHz Ref Offset: 11.8 dB Ref: 20.00 dBm Occupied Bandwidth: 36.425 MHz Total Power: 13.6 dBm Transmit Freq Error: 134.51 kHz OBW Power: 99.00 % x dB Bandwidth: 42.15 MHz x dB: -26.00 dB
CH54	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.270000000 GHz Ref Offset: 11.8 dB Ref: 20.00 dBm Occupied Bandwidth: 36.338 MHz Total Power: 13.4 dBm Transmit Freq Error: 131.81 kHz OBW Power: 99.00 % x dB Bandwidth: 41.66 MHz x dB: -26.00 dB

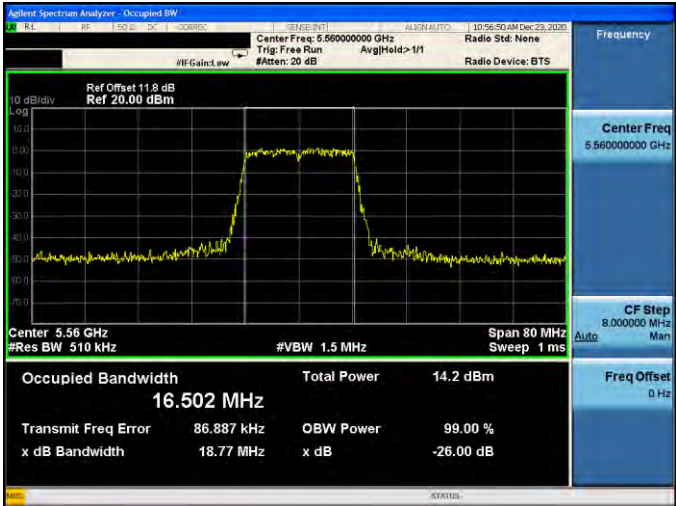
Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0	
CH62	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.31000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.31 GHz #Res BW 1 MHz #VBW 3 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth: 36.359 MHz Total Power: 13.8 dBm Transmit Freq Error: 76.123 kHz OBW Power: 99.00 % x dB Bandwidth: 42.06 MHz x dB: -26.00 dB Frequency: Center Freq 5.31000000 GHz CF Step 12.000000 MHz Freq Offset 0 Hz
CH102	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.51000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.51 GHz #Res BW 1 MHz #VBW 3 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth: 36.451 MHz Total Power: 10.2 dBm Transmit Freq Error: 232.10 kHz OBW Power: 99.00 % x dB Bandwidth: 42.21 MHz x dB: -26.00 dB Frequency: Center Freq 5.51000000 GHz CF Step 12.000000 MHz Freq Offset 0 Hz
CH110	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.55000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.55 GHz #Res BW 1 MHz #VBW 3 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth: 36.201 MHz Total Power: 12.7 dBm Transmit Freq Error: 184.79 kHz OBW Power: 99.00 % x dB Bandwidth: 41.67 MHz x dB: -26.00 dB Frequency: Center Freq 5.55000000 GHz CF Step 12.000000 MHz Freq Offset 0 Hz

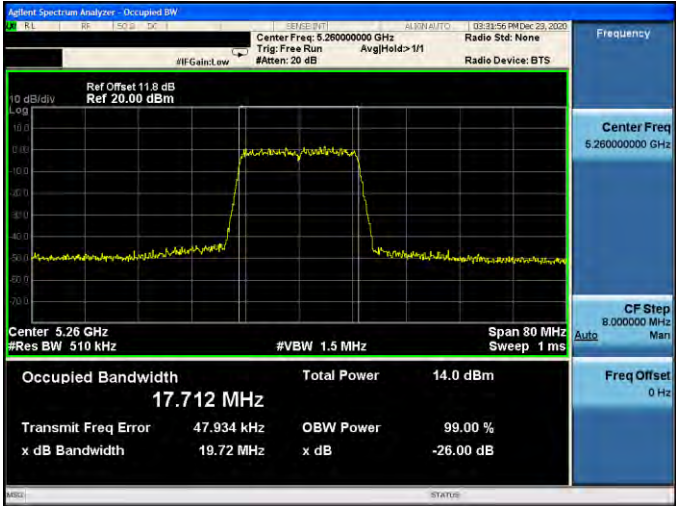
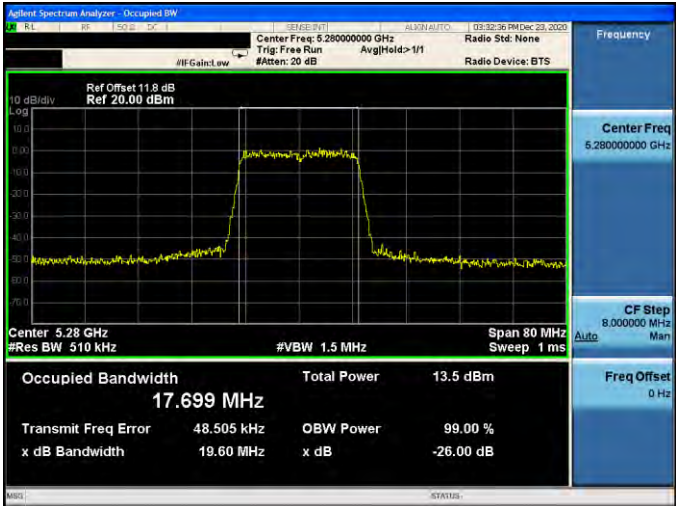


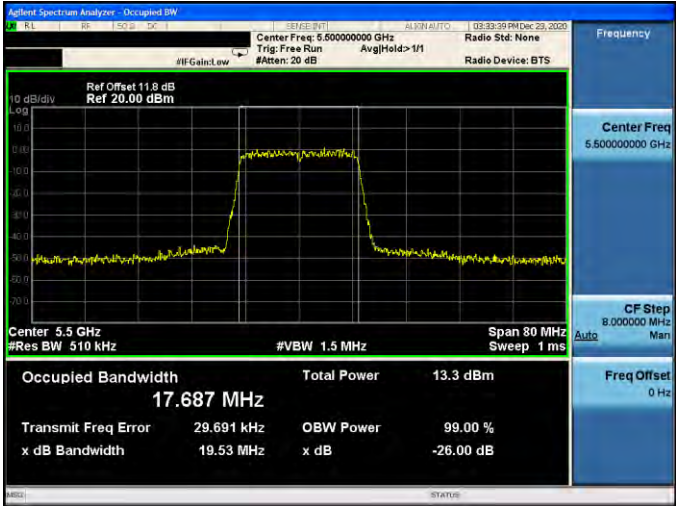
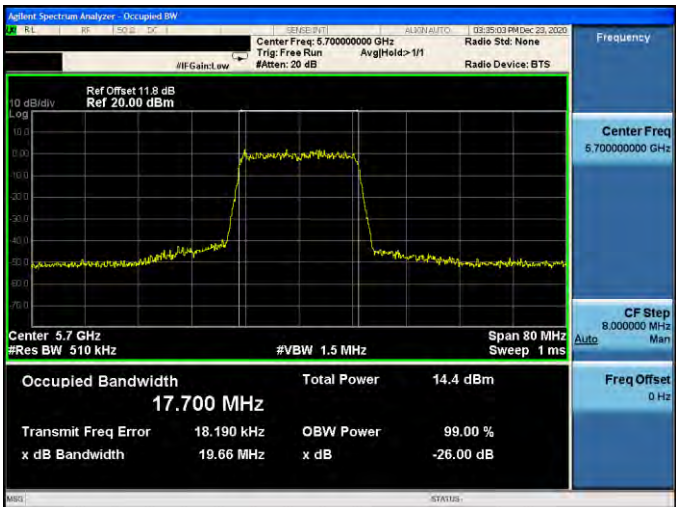
Mode 11: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-0	
CH42	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.21000000 GHz Ref Offset 11.8 dB Ref 20.00 dBm Center 5.21 GHz #Res BW 1 MHz Occupied Bandwidth: 74.657 MHz Total Power: 12.4 dBm Transmit Freq Error: 290.76 kHz x dB Bandwidth: 80.76 MHz OBW Power: 99.00 % x dB: -26.00 dB
CH58	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.29000000 GHz Ref Offset 11.8 dB Ref 20.00 dBm Center 5.29 GHz #Res BW 1 MHz Occupied Bandwidth: 75.124 MHz Total Power: 14.3 dBm Transmit Freq Error: 258.90 kHz x dB Bandwidth: 80.93 MHz OBW Power: 99.00 % x dB: -26.00 dB
CH106	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.53000000 GHz Ref Offset 11.8 dB Ref 20.00 dBm Center 5.53 GHz #Res BW 1 MHz Occupied Bandwidth: 74.854 MHz Total Power: 11.3 dBm Transmit Freq Error: 420.18 kHz x dB Bandwidth: 81.07 MHz OBW Power: 99.00 % x dB: -26.00 dB

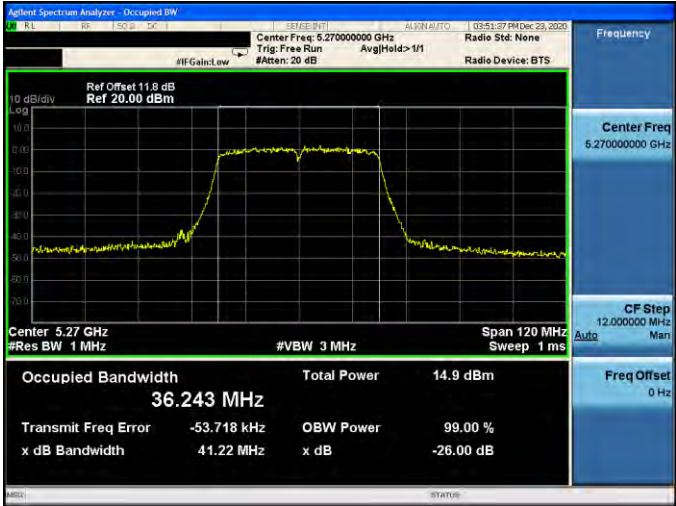
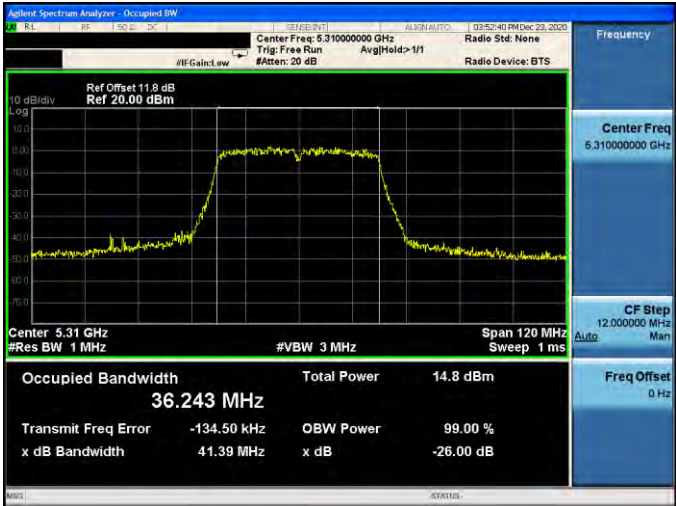
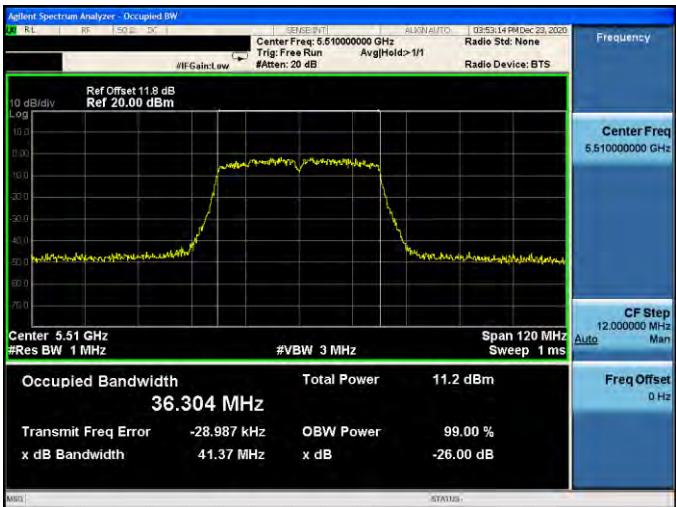
Mode 6: IEEE 802.11a Continuous TX Mode_ANT-1	
CH36	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.180000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm 10 dB/div Log Center 5.18 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 16.620 MHz Total Power 12.3 dBm Transmit Freq Error 66.196 kHz OBW Power 99.00 % x dB Bandwidth 18.84 MHz x dB -26.00 dB
CH40	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.200000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm 10 dB/div Log Center 5.2 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 16.533 MHz Total Power 12.5 dBm Transmit Freq Error 50.834 kHz OBW Power 99.00 % x dB Bandwidth 18.88 MHz x dB -26.00 dB
CH48	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.240000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm 10 dB/div Log Center 5.24 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 16.487 MHz Total Power 13.4 dBm Transmit Freq Error 85.046 kHz OBW Power 99.00 % x dB Bandwidth 18.63 MHz x dB -26.00 dB

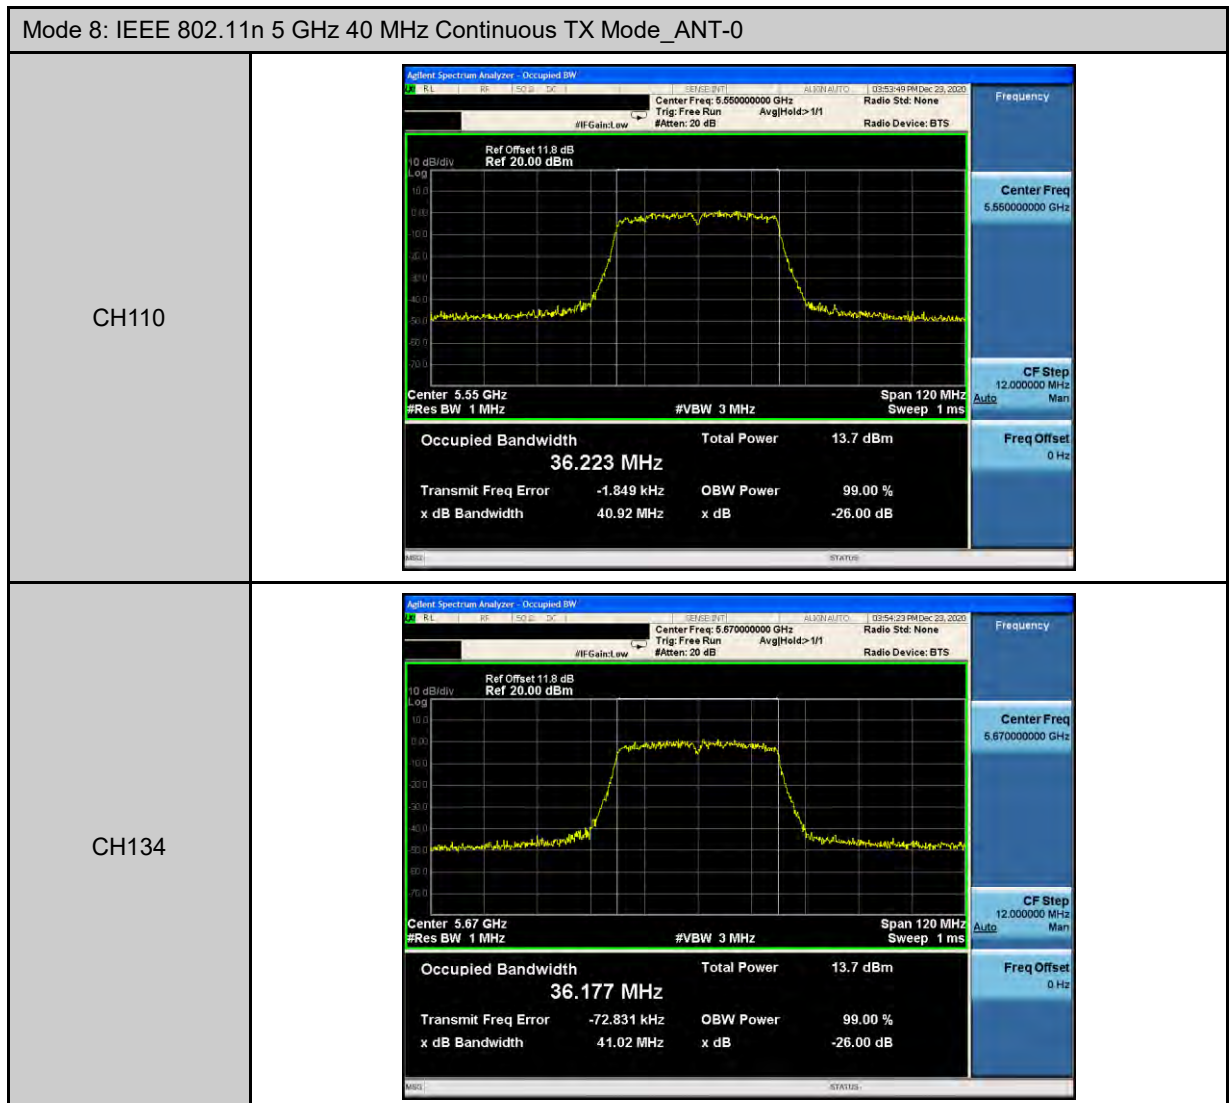
Mode 6: IEEE 802.11a Continuous TX Mode_ANT-1	
CH52	
CH56	
CH64	

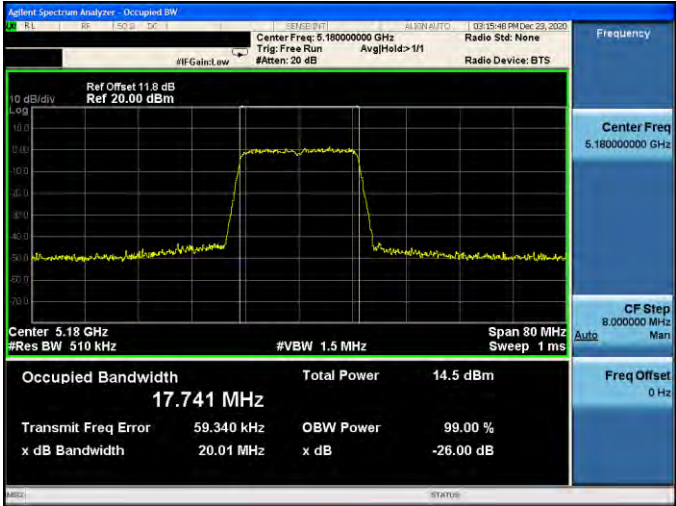
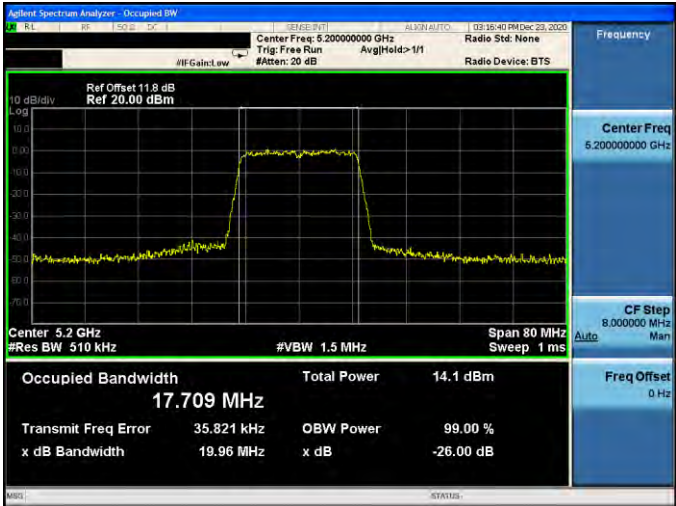
Mode 6: IEEE 802.11a Continuous TX Mode_ANT-1	
CH100	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.500000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.5 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 16.537 MHz Total Power 12.3 dBm Transmit Freq Error 73.833 kHz OBW Power 99.00 % x dB Bandwidth 19.11 MHz x dB -26.00 dB Frequency Center Freq 5.500000000 GHz CF Step 8.000000 MHz Freq Offset 0 Hz
CH112	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.560000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.56 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 16.502 MHz Total Power 14.2 dBm Transmit Freq Error 86.887 kHz OBW Power 99.00 % x dB Bandwidth 18.77 MHz x dB -26.00 dB Frequency Center Freq 5.560000000 GHz CF Step 8.000000 MHz Freq Offset 0 Hz
CH140	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.700000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.7 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 16.597 MHz Total Power 13.8 dBm Transmit Freq Error 63.499 kHz OBW Power 99.00 % x dB Bandwidth 18.88 MHz x dB -26.00 dB Frequency Center Freq 5.700000000 GHz CF Step 8.000000 MHz Freq Offset 0 Hz

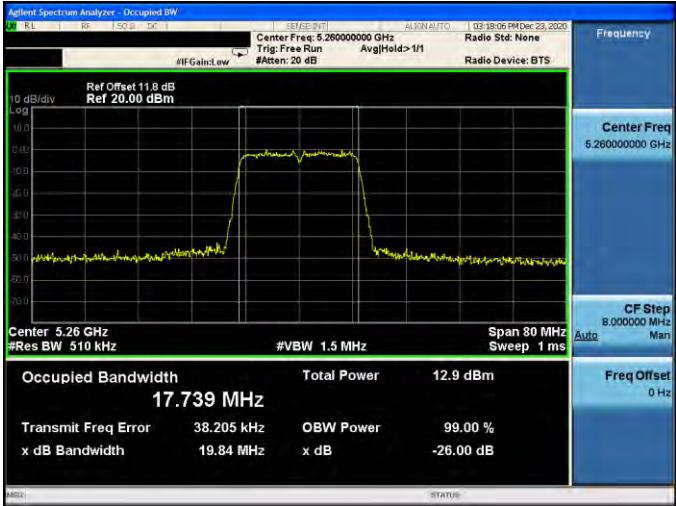
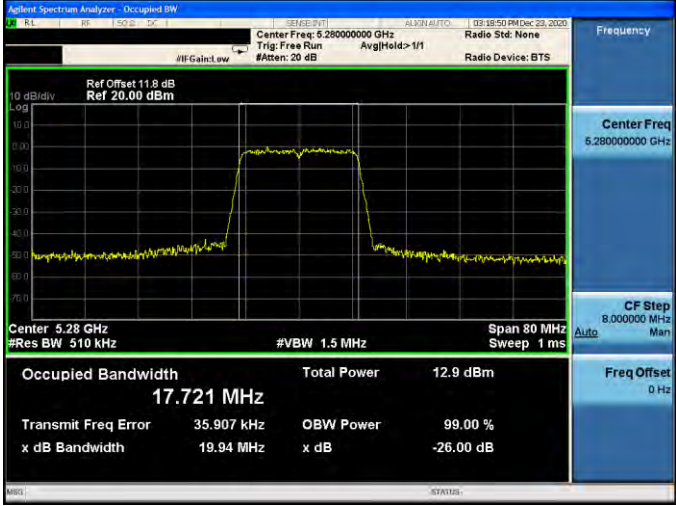
Mode 7: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-0	
CH52	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.260000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.26 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.712 MHz Total Power 14.0 dBm Transmit Freq Error 47.934 kHz OBW Power 99.00 % x dB Bandwidth 19.72 MHz x dB -26.00 dB Frequency Center Freq 5.260000000 GHz CF Step 8.000000 MHz Freq Offset 0 Hz
CH56	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.280000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.28 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.699 MHz Total Power 13.5 dBm Transmit Freq Error 48.505 kHz OBW Power 99.00 % x dB Bandwidth 19.60 MHz x dB -26.00 dB Frequency Center Freq 5.280000000 GHz CF Step 8.000000 MHz Freq Offset 0 Hz
CH64	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.320000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.32 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.719 MHz Total Power 12.9 dBm Transmit Freq Error 29.504 kHz OBW Power 99.00 % x dB Bandwidth 19.71 MHz x dB -26.00 dB Frequency Center Freq 5.320000000 GHz CF Step 8.000000 MHz Freq Offset 0 Hz

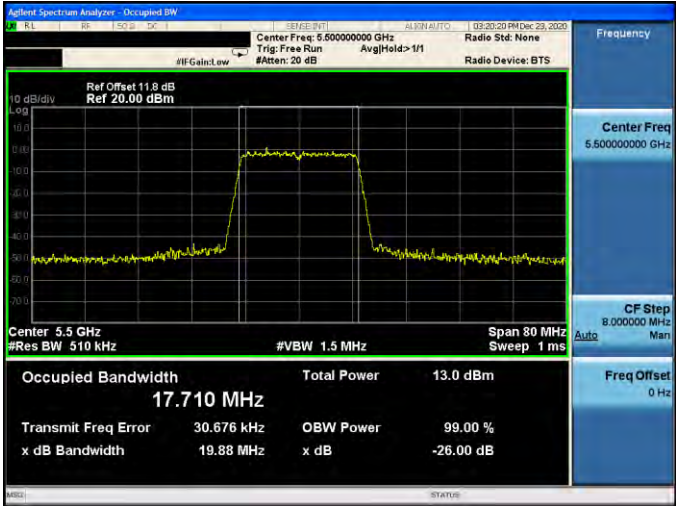
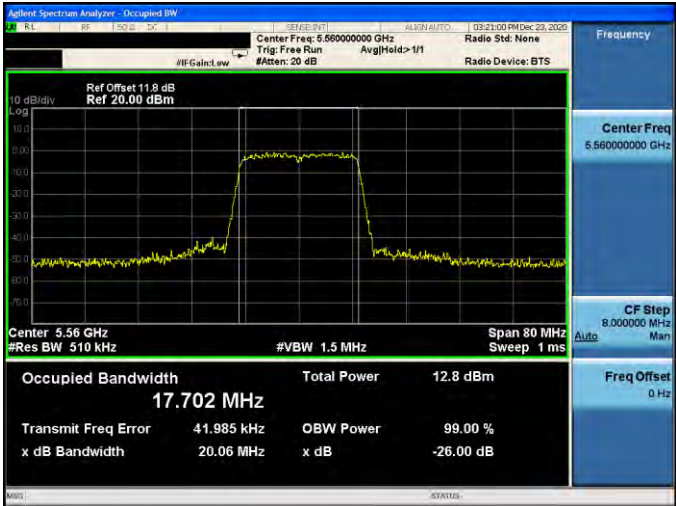
Mode 7: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-0	
CH100	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.50000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.5 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.687 MHz Total Power 13.3 dBm Transmit Freq Error 29.691 kHz OBW Power 99.00 % x dB Bandwidth 19.53 MHz x dB -26.00 dB Frequency Center Freq 5.50000000 GHz CF Step 8.00000 MHz Freq Offset 0 Hz
CH112	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.56000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.56 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.663 MHz Total Power 13.1 dBm Transmit Freq Error 34.416 kHz OBW Power 99.00 % x dB Bandwidth 19.63 MHz x dB -26.00 dB Frequency Center Freq 5.56000000 GHz CF Step 8.00000 MHz Freq Offset 0 Hz
CH140	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.70000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.7 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.700 MHz Total Power 14.4 dBm Transmit Freq Error 18.190 kHz OBW Power 99.00 % x dB Bandwidth 19.66 MHz x dB -26.00 dB Frequency Center Freq 5.70000000 GHz CF Step 8.00000 MHz Freq Offset 0 Hz

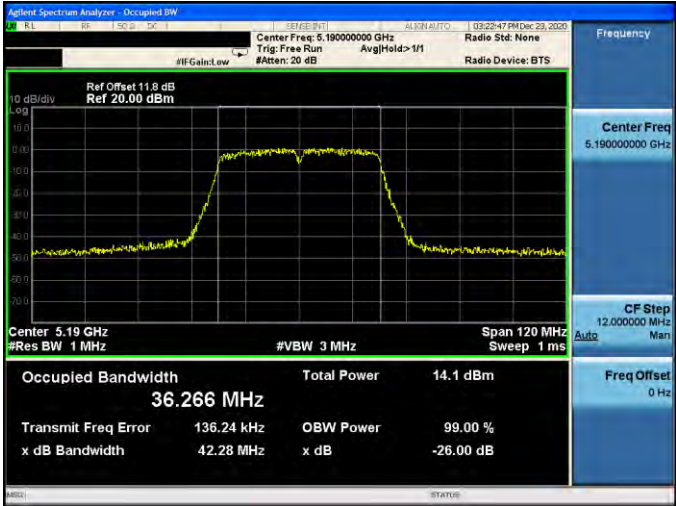
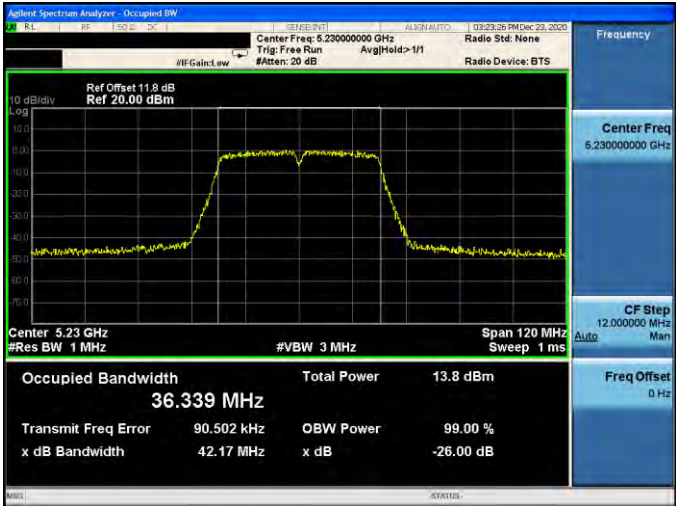
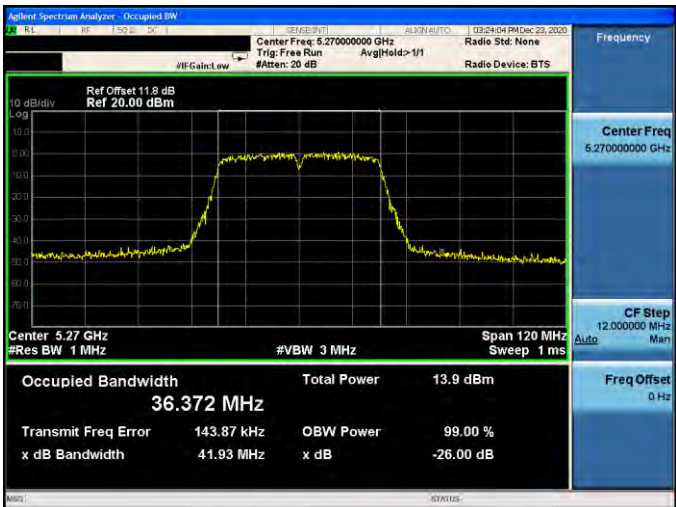
Mode 8: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-0	
CH54	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.27000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm 10 dB/div Log Center 5.27 GHz #Res BW 1 MHz #VBW 3 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.243 MHz Total Power 14.9 dBm Transmit Freq Error -53.718 kHz OBW Power 99.00 % x dB Bandwidth 41.22 MHz x dB -26.00 dB
CH62	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.31000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm 10 dB/div Log Center 5.31 GHz #Res BW 1 MHz #VBW 3 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.243 MHz Total Power 14.8 dBm Transmit Freq Error -134.50 kHz OBW Power 99.00 % x dB Bandwidth 41.39 MHz x dB -26.00 dB
CH102	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.51000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm 10 dB/div Log Center 5.51 GHz #Res BW 1 MHz #VBW 3 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.304 MHz Total Power 11.2 dBm Transmit Freq Error -28.987 kHz OBW Power 99.00 % x dB Bandwidth 41.37 MHz x dB -26.00 dB

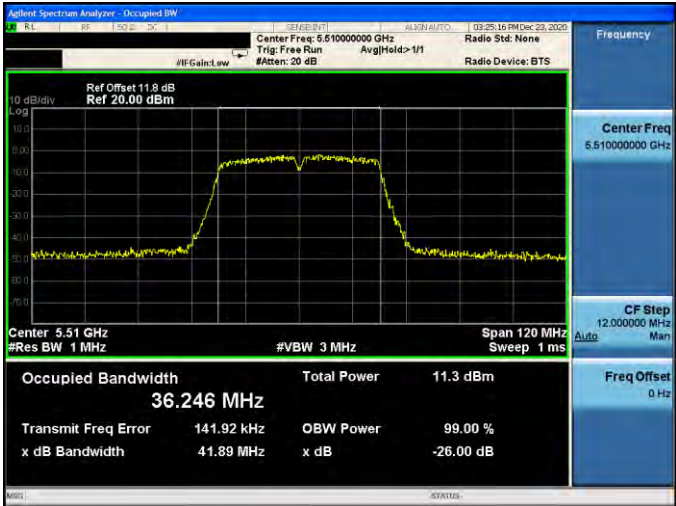


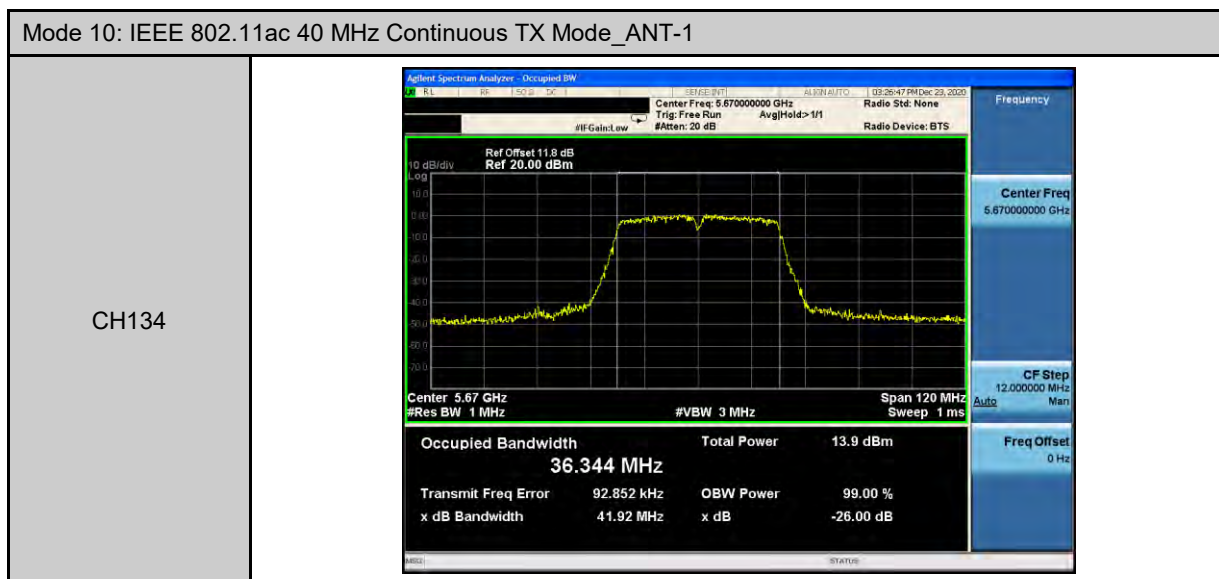
Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-1	
CH36	
CH40	
CH48	

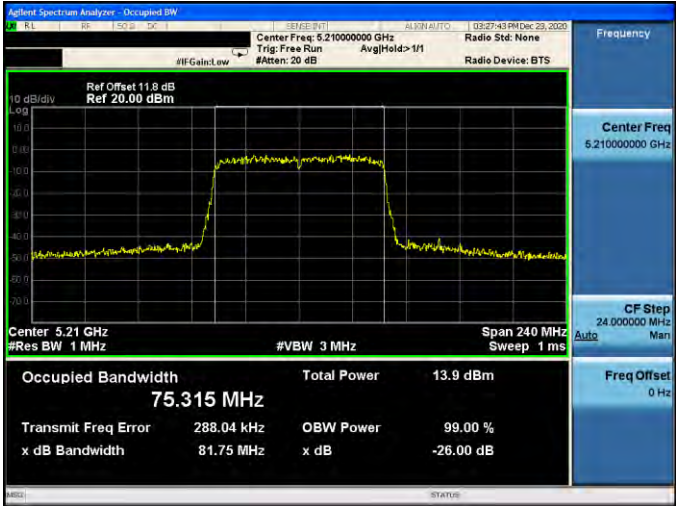
Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-1	
CH52	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.260000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm 10 dB/div Log Center 5.26 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.739 MHz Total Power 12.9 dBm Transmit Freq Error 38.205 kHz OBW Power 99.00 % x dB Bandwidth 19.84 MHz x dB -26.00 dB
CH56	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.280000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm 10 dB/div Log Center 5.28 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.721 MHz Total Power 12.9 dBm Transmit Freq Error 35.907 kHz OBW Power 99.00 % x dB Bandwidth 19.94 MHz x dB -26.00 dB
CH64	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.320000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm 10 dB/div Log Center 5.32 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.692 MHz Total Power 12.5 dBm Transmit Freq Error 21.999 kHz OBW Power 99.00 % x dB Bandwidth 19.97 MHz x dB -26.00 dB

Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-1	
CH100	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.50000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.5 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.710 MHz Total Power 13.0 dBm Transmit Freq Error 30.676 kHz OBW Power 99.00 % x dB Bandwidth 19.88 MHz x dB -26.00 dB Frequency Center Freq 5.50000000 GHz CF Step 8.000000 MHz Freq Offset 0 Hz
CH112	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.56000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.56 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.702 MHz Total Power 12.8 dBm Transmit Freq Error 41.985 kHz OBW Power 99.00 % x dB Bandwidth 20.06 MHz x dB -26.00 dB Frequency Center Freq 5.56000000 GHz CF Step 8.000000 MHz Freq Offset 0 Hz
CH140	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.70000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.7 GHz #Res BW 510 kHz #VBW 1.5 MHz Span 80 MHz Sweep 1 ms Occupied Bandwidth 17.682 MHz Total Power 13.7 dBm Transmit Freq Error 32.732 kHz OBW Power 99.00 % x dB Bandwidth 19.92 MHz x dB -26.00 dB Frequency Center Freq 5.70000000 GHz CF Step 8.000000 MHz Freq Offset 0 Hz

Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-1	
CH38	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.190000000 GHz #Res BW: 1 MHz #VBW: 3 MHz Span: 120 MHz Sweep: 1 ms Occupied Bandwidth: 36.266 MHz Total Power: 14.1 dBm Transmit Freq Error: 136.24 kHz OBW Power: 99.00 % x dB Bandwidth: 42.28 MHz x dB: -26.00 dB Frequency: Center Freq 5.190000000 GHz CF Step: 12.000000 MHz Freq Offset: 0 Hz
CH46	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.230000000 GHz #Res BW: 1 MHz #VBW: 3 MHz Span: 120 MHz Sweep: 1 ms Occupied Bandwidth: 36.339 MHz Total Power: 13.8 dBm Transmit Freq Error: 90.502 kHz OBW Power: 99.00 % x dB Bandwidth: 42.17 MHz x dB: -26.00 dB Frequency: Center Freq 5.230000000 GHz CF Step: 12.000000 MHz Freq Offset: 0 Hz
CH54	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.270000000 GHz #Res BW: 1 MHz #VBW: 3 MHz Span: 120 MHz Sweep: 1 ms Occupied Bandwidth: 36.372 MHz Total Power: 13.9 dBm Transmit Freq Error: 143.87 kHz OBW Power: 99.00 % x dB Bandwidth: 41.93 MHz x dB: -26.00 dB Frequency: Center Freq 5.270000000 GHz CF Step: 12.000000 MHz Freq Offset: 0 Hz

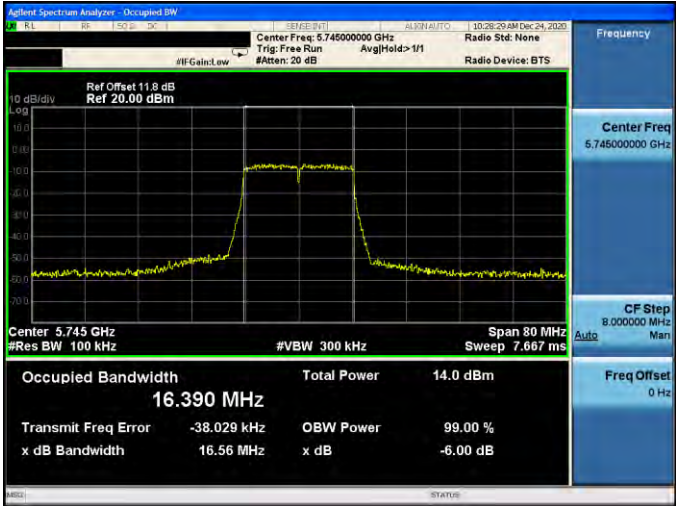
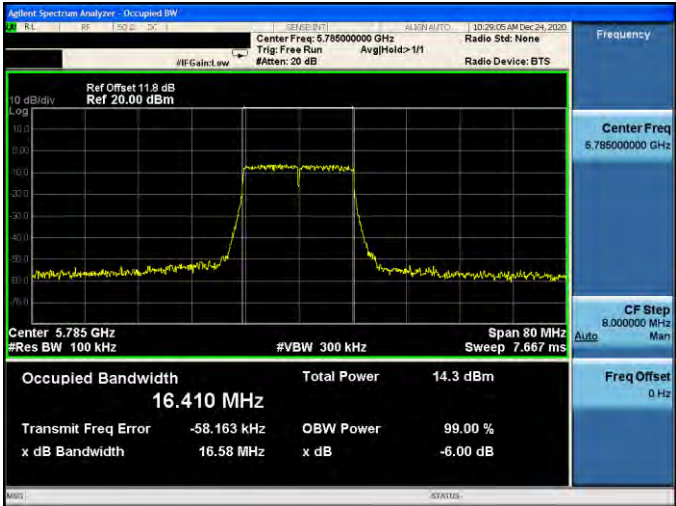
Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-1	
CH62	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.31000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Stat: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.31 GHz #Res BW 1 MHz #VBW 3 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.269 MHz Total Power 14.2 dBm Transmit Freq Error 51.258 kHz OBW Power 99.00 % x dB Bandwidth 42.01 MHz x dB -26.00 dB Frequency Center Freq 5.31000000 GHz CF Step 12.000000 MHz Freq Offset 0 Hz
CH102	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.51000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Stat: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.51 GHz #Res BW 1 MHz #VBW 3 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.246 MHz Total Power 11.3 dBm Transmit Freq Error 141.92 kHz OBW Power 99.00 % x dB Bandwidth 41.89 MHz x dB -26.00 dB Frequency Center Freq 5.51000000 GHz CF Step 12.000000 MHz Freq Offset 0 Hz
CH110	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.55000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Stat: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm Center 5.55 GHz #Res BW 1 MHz #VBW 3 MHz Span 120 MHz Sweep 1 ms Occupied Bandwidth 36.195 MHz Total Power 13.8 dBm Transmit Freq Error 178.74 kHz OBW Power 99.00 % x dB Bandwidth 41.95 MHz x dB -26.00 dB Frequency Center Freq 5.55000000 GHz CF Step 12.000000 MHz Freq Offset 0 Hz

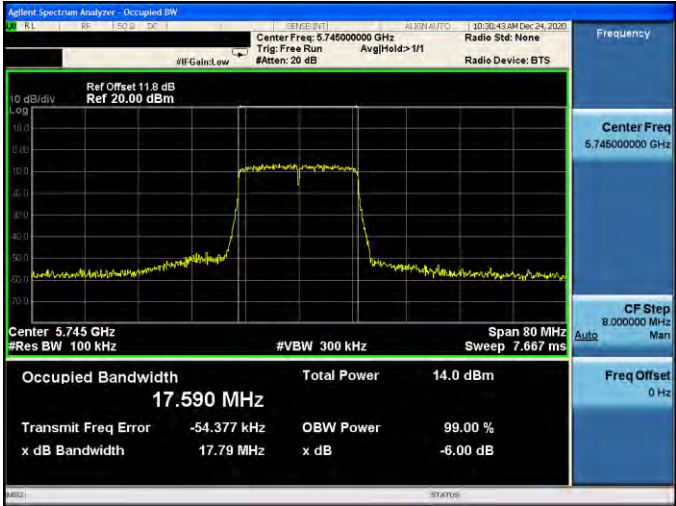
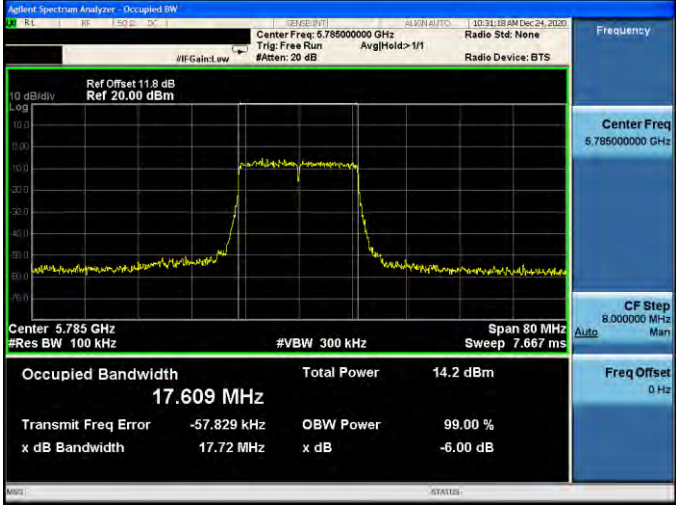


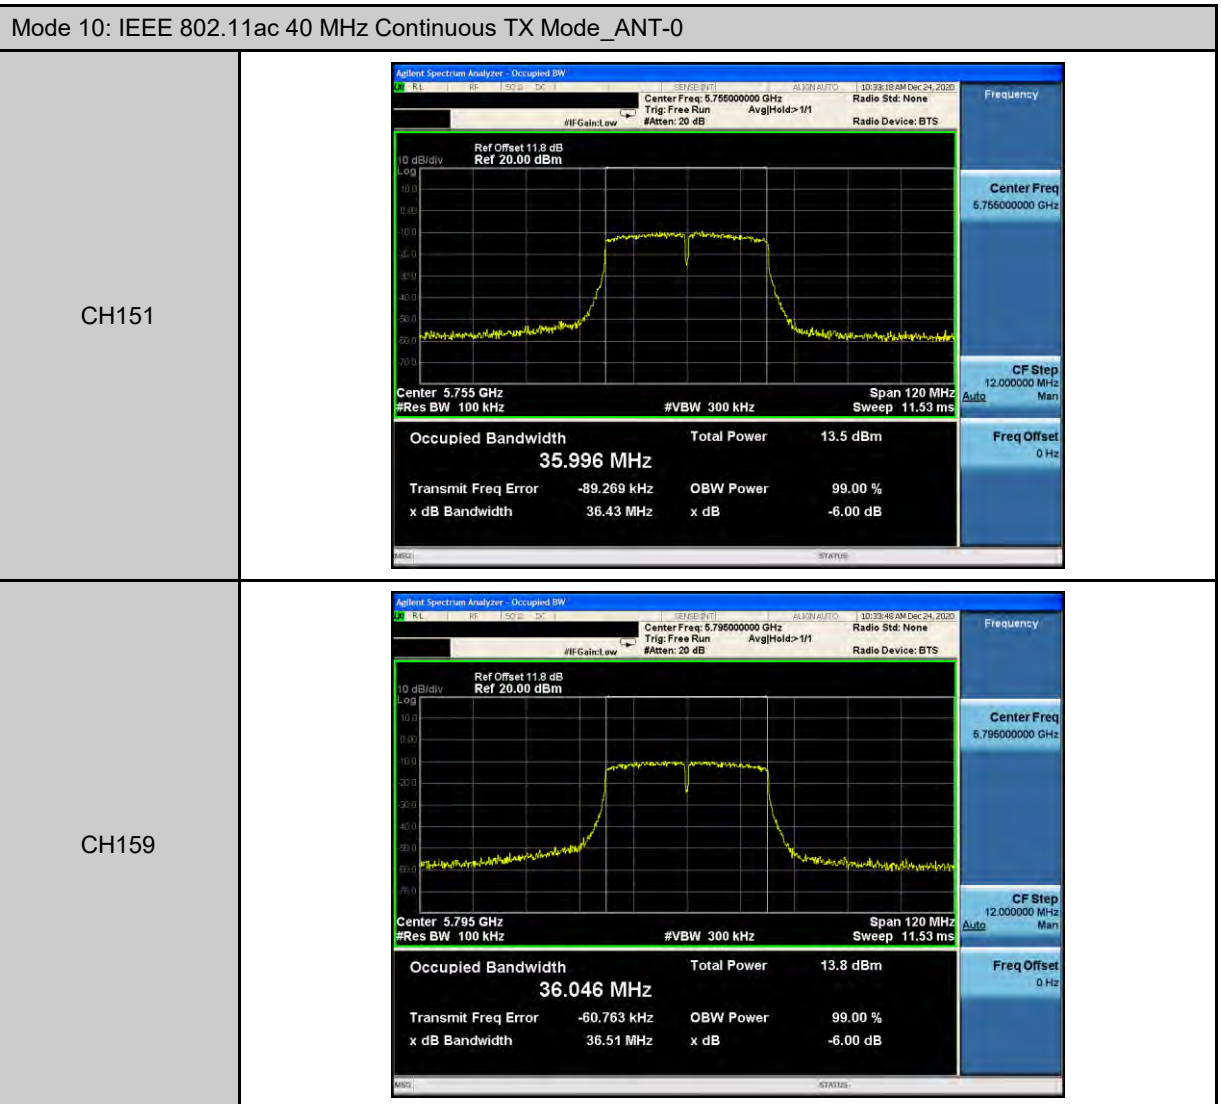
Mode 11: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-1	
CH42	
CH58	
CH106	

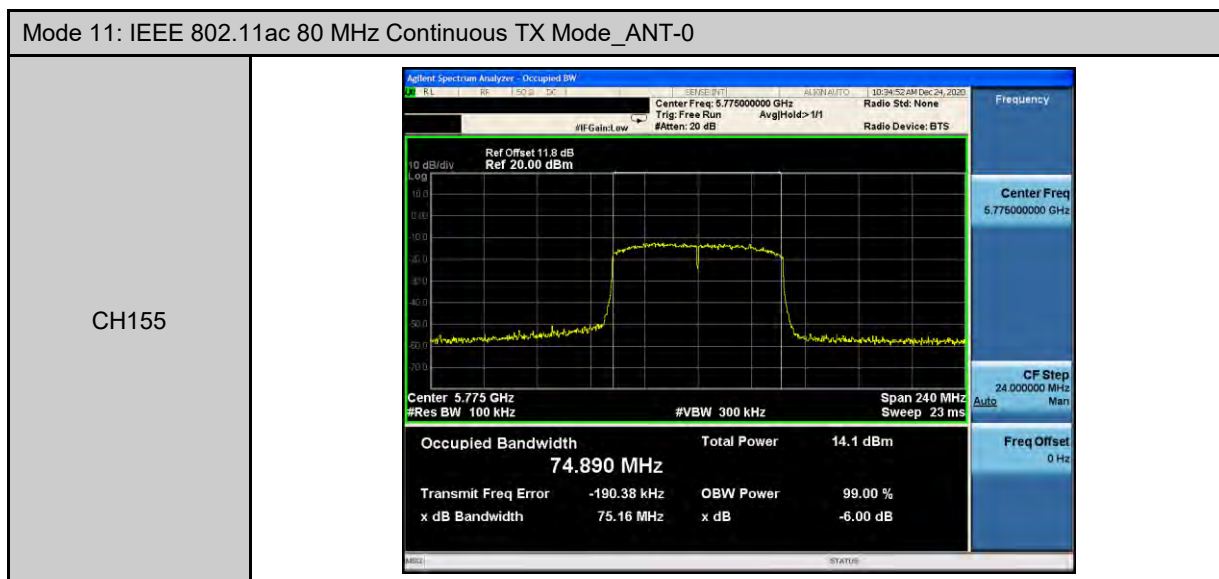
6 dB Bandwidth

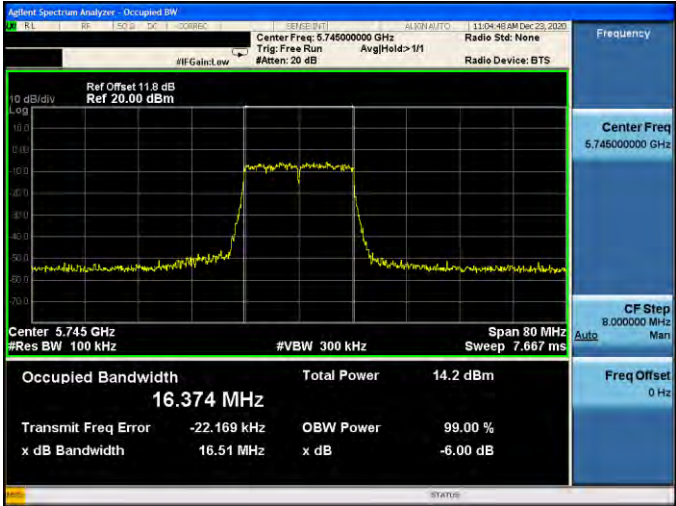
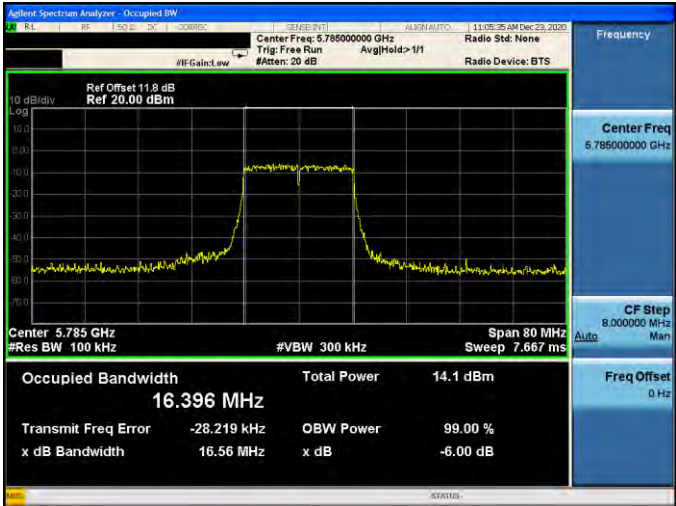
操作模式	頻道 (CH)	頻率 (MHz)	6 dB 頻寬量測值 (kHz)		限制值 (kHz)
			ANT-0	ANT-1	
Mode 6	149	5745.0	16560	16510	≥ 500
	157	5785.0	16580	16560	≥ 500
	165	5825.0	16530	16550	≥ 500
Mode 9	149	5745.0	17790	17790	≥ 500
	157	5785.0	17720	17780	≥ 500
	165	5825.0	17810	17800	≥ 500
Mode 10	151	5755.0	36430	36500	≥ 500
	159	5795.0	36510	36490	≥ 500
Mode 11	155	5775.0	75160	75420	≥ 500

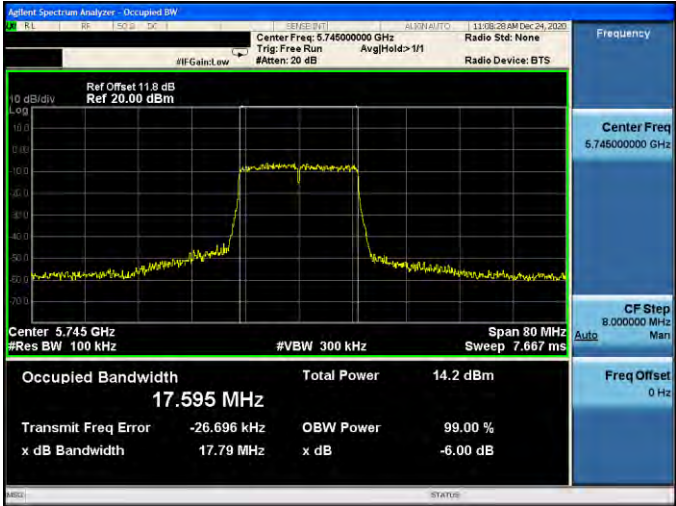
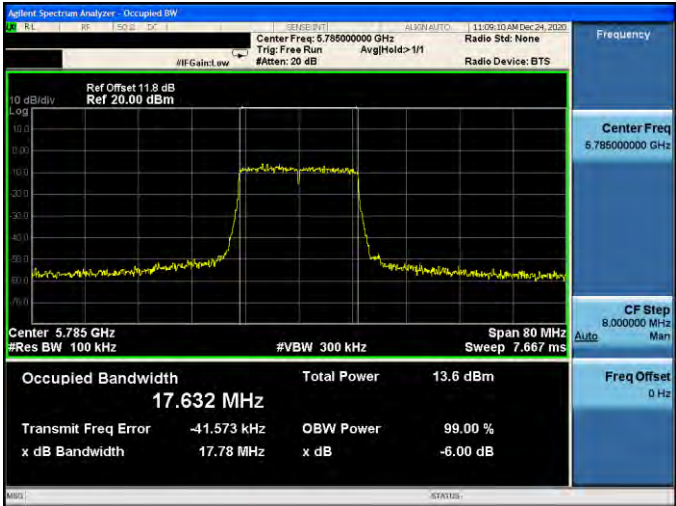
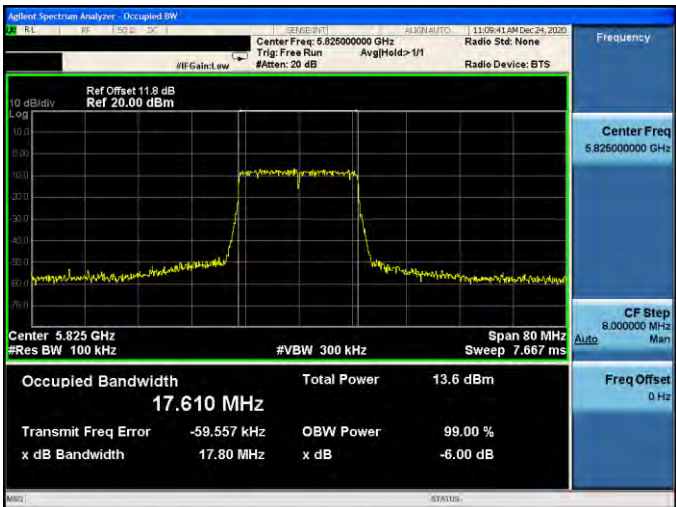
Mode 6: IEEE 802.11a Continuous TX Mode_ANT-0	
CH149	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.745000000 GHz Trig: Free Run #Atten: 20 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm 10 dB/div Log Center 5.745 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 16.390 MHz Total Power 14.0 dBm Transmit Freq Error -38.029 kHz OBW Power 99.00 % x dB Bandwidth 16.56 MHz x dB -6.00 dB Frequency Center Freq 5.745000000 GHz CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz
CH157	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.785000000 GHz Trig: Free Run #Atten: 20 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm 10 dB/div Log Center 5.785 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 16.410 MHz Total Power 14.3 dBm Transmit Freq Error -58.163 kHz OBW Power 99.00 % x dB Bandwidth 16.58 MHz x dB -6.00 dB Frequency Center Freq 5.785000000 GHz CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz
CH165	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.825000000 GHz Trig: Free Run #Atten: 20 dB Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm 10 dB/div Log Center 5.825 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 16.382 MHz Total Power 13.0 dBm Transmit Freq Error -51.641 kHz OBW Power 99.00 % x dB Bandwidth 16.53 MHz x dB -6.00 dB Frequency Center Freq 5.825000000 GHz CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz

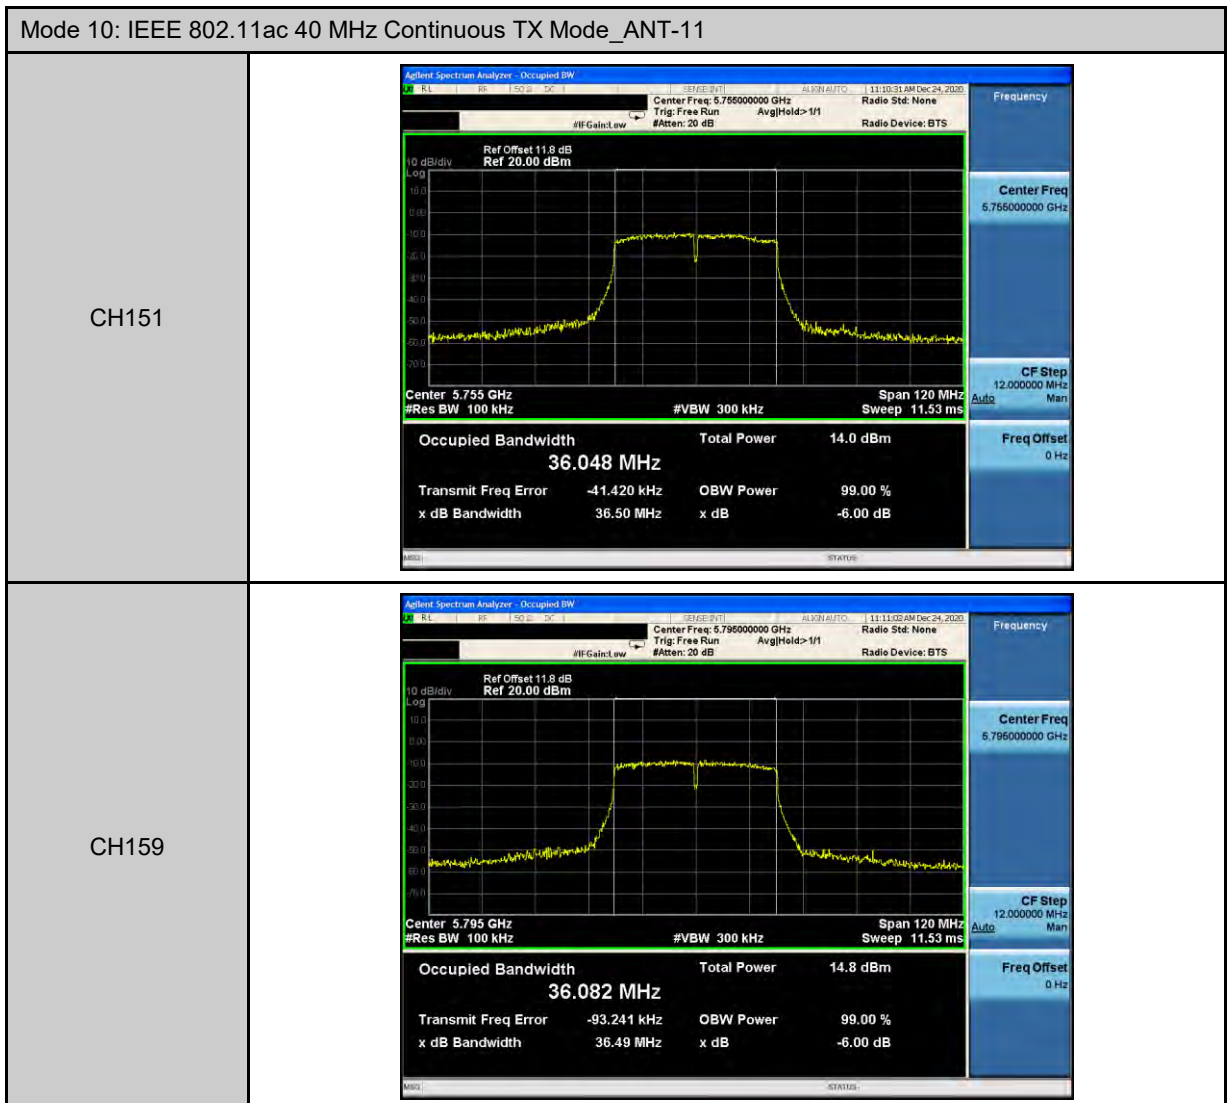
Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0	
CH149	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.745000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm 10 dB/div Log Center 5.745 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 17.590 MHz Total Power 14.0 dBm Transmit Freq Error -54.377 kHz OBW Power 99.00 % x dB Bandwidth 17.79 MHz x dB -6.00 dB Frequency Center Freq 5.745000000 GHz CF Step 8.000000 MHz Freq Offset 0 Hz
CH157	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.785000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm 10 dB/div Log Center 5.785 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 17.609 MHz Total Power 14.2 dBm Transmit Freq Error -57.829 kHz OBW Power 99.00 % x dB Bandwidth 17.72 MHz x dB -6.00 dB Frequency Center Freq 5.785000000 GHz CF Step 8.000000 MHz Freq Offset 0 Hz
CH165	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.825000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm 10 dB/div Log Center 5.825 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 17.614 MHz Total Power 13.6 dBm Transmit Freq Error -58.904 kHz OBW Power 99.00 % x dB Bandwidth 17.81 MHz x dB -6.00 dB Frequency Center Freq 5.825000000 GHz CF Step 8.000000 MHz Freq Offset 0 Hz

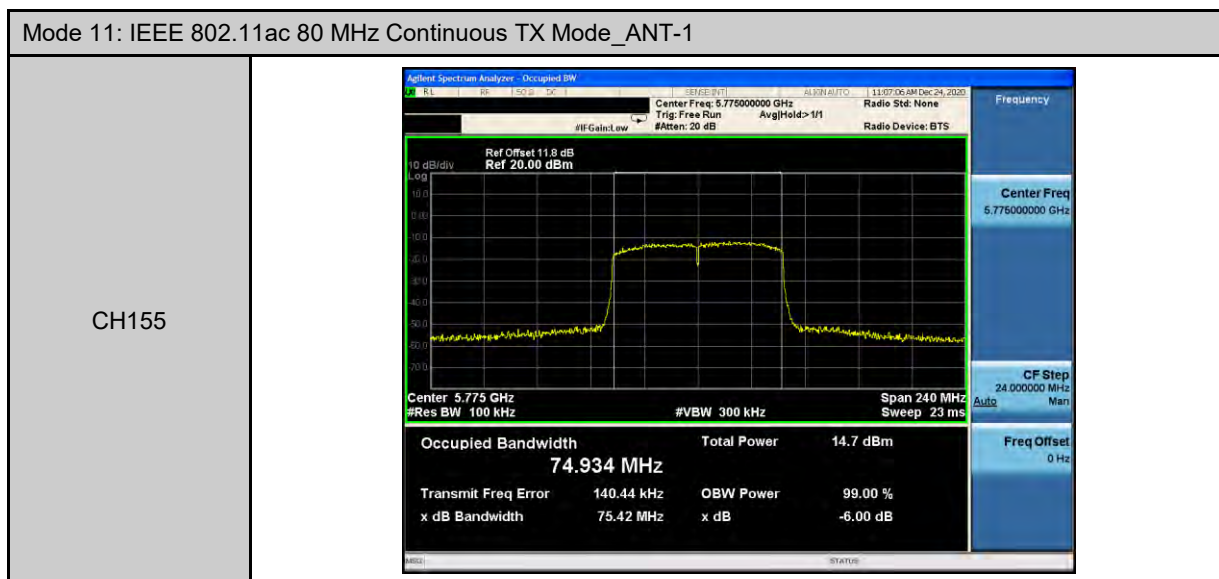




Mode 6: IEEE 802.11a Continuous TX Mode_ANT-1	
CH149	
CH157	
CH165	

Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-1	
CH149	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.745000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm 10 dB/div Log Center 5.745 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 17.595 MHz Total Power 14.2 dBm Transmit Freq Error -26.696 kHz OBW Power 99.00 % x dB Bandwidth 17.79 MHz x dB -6.00 dB Frequency Center Freq 5.745000000 GHz CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz
CH157	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.785000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm 10 dB/div Log Center 5.785 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 17.632 MHz Total Power 13.6 dBm Transmit Freq Error -41.573 kHz OBW Power 99.00 % x dB Bandwidth 17.78 MHz x dB -6.00 dB Frequency Center Freq 5.785000000 GHz CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz
CH165	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.825000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.8 dB Ref 20.00 dBm 10 dB/div Log Center 5.825 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 17.610 MHz Total Power 13.6 dBm Transmit Freq Error -59.557 kHz OBW Power 99.00 % x dB Bandwidth 17.80 MHz x dB -6.00 dB Frequency Center Freq 5.825000000 GHz CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz





發射功率控制(TPC)

測試結果	:	Mode 6: EIRP =	23.097 mW	< 500 mW	, 故不需評估發射功率控制(TPC)。
		Mode 7: EIRP =	22.649 mW	< 500 mW	, 故不需評估發射功率控制(TPC)。
		Mode 8: EIRP =	22.001 mW	< 500 mW	, 故不需評估發射功率控制(TPC)。
		Mode 9: EIRP =	22.963 mW	< 500 mW	, 故不需評估發射功率控制(TPC)。
		Mode 10: EIRP =	22.534 mW	< 500 mW	, 故不需評估發射功率控制(TPC)。
		Mode 11: EIRP =	22.963 mW	< 500 mW	, 故不需評估發射功率控制(TPC)。

動態頻率選擇(DFS)

操作模式	:	Mode 11
測試結果	:	不適用，此產品為受控裝置，因此不須評估動態頻率選擇(DFS)

頻道可用性檢查時間

操作模式	:	Mode 11
測試結果	:	不適用；此產品為受控裝置，因此不須評估頻道可用性檢查時間

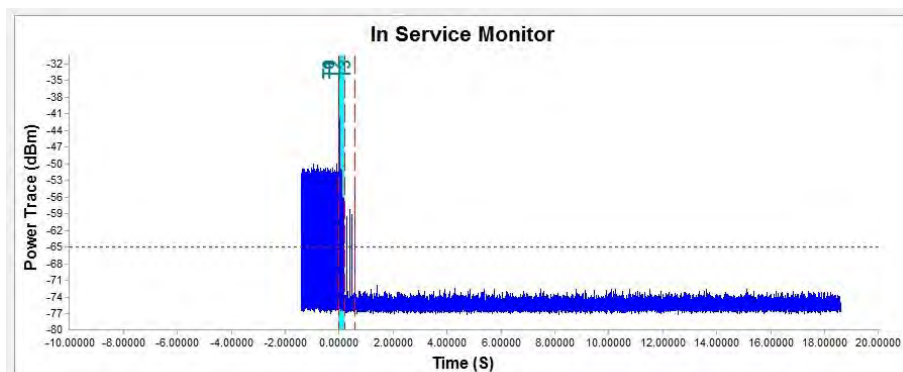
頻道移動時間

操作模式	Frequency (MHz)	Radar Type	Channel Move Time (sec)	Limit (sec)
Mode 11	5530	Type 0	0.5830	10

操作模式	Frequency (MHz)	Radar Type	Aggregate Channel Closing Transmission Time (msec)	Limit (sec)
Mode 11	5530	Type 0	4.9999	200

Mode 11 IEEE 802.11ac 80 MHz Continuous TX Mode

Channel Move Time
/
Channel Closing
Transmission Time



Time Index Info

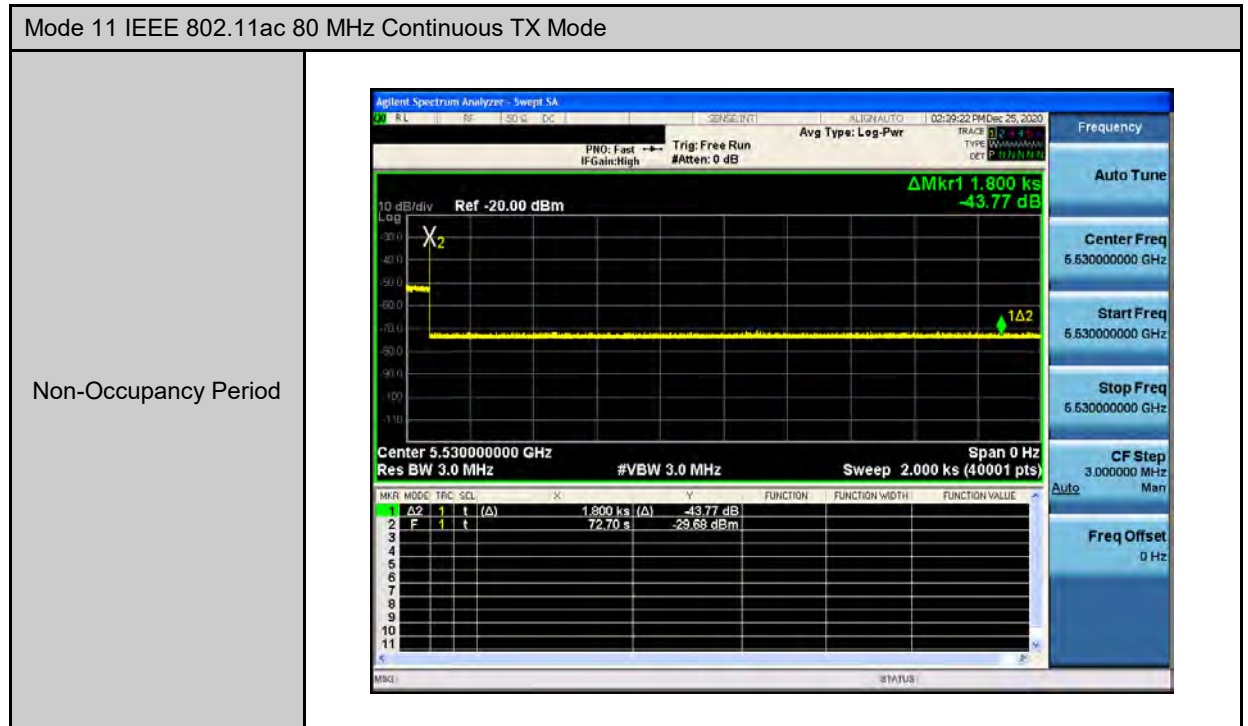
T0 : -0.0245 S Time Per Bin: 0.4999875 ms
T1 : 0.0000 S
T2 : 0.2000 S
T3 : 0.5830 S

T2~T3 Bins Over Threshold:
= 10 Bins

Channel Move Time: 0.5829854 S

Channel Close Time: 0.0049999 S

不可佔用時間



電波暴露量之評估

Band	Frequency (MHz)	Limit (mW/cm ²)	Distance [R] (cm)	Power [P] (dBm)	ANT Gain (dBi)	Numeric Gain [G] (dBi)	Duty Cycle	With Duty cycle [P] x [G] (mW)	Power Density [S] (mW/cm ²)
WLAN 2.4 GHz	2412-2462	1	20	14.51	1	1.26	1	35.593	0.0071
WLAN 5 GHz	5180-5825	1	20	11.87	2	1.58	1	24.291	0.0048

---END---