




TestCondition	TestMode	Antenna	Frequency[MHz]	Result [MHz]	Limit [MHz]	Verdict
NTNV	11A	Ant1	5180	16.705	≤20	PASS
NTNV	11A	Ant1	5200	16.617	≤20	PASS
NTNV	11A	Ant1	5240	16.768	≤20	PASS
NTNV	11A	Ant1	5260	16.775	≤20	PASS
NTNV	11A	Ant1	5280	16.660	≤20	PASS
NTNV	11A	Ant1	5320	16.635	≤20	PASS
NTNV	11A	Ant1	5500	16.542	≤20	PASS
NTNV	11A	Ant1	5580	16.563	≤20	PASS
NTNV	11A	Ant1	5700	16.695	≤20	PASS
NTNV	11N20SISO	Ant1	5180	17.847	≤20	PASS
NTNV	11N20SISO	Ant1	5200	17.922	≤20	PASS
NTNV	11N20SISO	Ant1	5240	17.819	≤20	PASS
NTNV	11N20SISO	Ant1	5260	17.830	≤20	PASS
NTNV	11N20SISO	Ant1	5280	17.782	≤20	PASS
NTNV	11N20SISO	Ant1	5320	17.923	≤20	PASS
NTNV	11N20SISO	Ant1	5500	17.884	≤20	PASS
NTNV	11N20SISO	Ant1	5580	17.872	≤20	PASS
NTNV	11N20SISO	Ant1	5700	17.753	≤20	PASS
NTNV	11N40SISO	Ant1	5190	36.210	≤40	PASS
NTNV	11N40SISO	Ant1	5230	36.149	≤40	PASS
NTNV	11N40SISO	Ant1	5270	36.245	≤40	PASS
NTNV	11N40SISO	Ant1	5310	36.258	≤40	PASS
NTNV	11N40SISO	Ant1	5510	36.182	≤40	PASS
NTNV	11N40SISO	Ant1	5670	36.416	≤40	PASS
NTNV	11AC20SISO	Ant1	5180	17.814	≤20	PASS
NTNV	11AC20SISO	Ant1	5200	17.966	≤20	PASS
NTNV	11AC20SISO	Ant1	5240	17.914	≤20	PASS
NTNV	11AC20SISO	Ant1	5260	17.818	≤20	PASS
NTNV	11AC20SISO	Ant1	5280	17.897	≤20	PASS
NTNV	11AC20SISO	Ant1	5320	17.906	≤20	PASS
NTNV	11AC20SISO	Ant1	5500	17.827	≤20	PASS
NTNV	11AC20SISO	Ant1	5580	17.921	≤20	PASS
NTNV	11AC20SISO	Ant1	5700	17.972	≤20	PASS
NTNV	11AC40SISO	Ant1	5190	36.228	≤40	PASS
NTNV	11AC40SISO	Ant1	5230	36.088	≤40	PASS
NTNV	11AC40SISO	Ant1	5270	36.154	≤40	PASS
NTNV	11AC40SISO	Ant1	5310	36.334	≤40	PASS
NTNV	11AC40SISO	Ant1	5510	36.162	≤40	PASS
NTNV	11AC40SISO	Ant1	5670	36.323	≤40	PASS
NTNV	11AX20SISO	Ant1	5180	18.891	≤20	PASS
NTNV	11AX20SISO	Ant1	5200	19.045	≤20	PASS
NTNV	11AX20SISO	Ant1	5240	18.956	≤20	PASS
NTNV	11AX20SISO	Ant1	5260	18.925	≤20	PASS
NTNV	11AX20SISO	Ant1	5280	19.007	≤20	PASS
NTNV	11AX20SISO	Ant1	5320	19.004	≤20	PASS
NTNV	11AX20SISO	Ant1	5500	18.927	≤20	PASS
NTNV	11AX20SISO	Ant1	5580	18.959	≤20	PASS
NTNV	11AX20SISO	Ant1	5700	18.990	≤20	PASS
NTNV	11AX40SISO	Ant1	5190	37.626	≤40	PASS
NTNV	11AX40SISO	Ant1	5230	37.761	≤40	PASS
NTNV	11AX40SISO	Ant1	5270	37.817	≤40	PASS
NTNV	11AX40SISO	Ant1	5310	37.737	≤40	PASS
NTNV	11AX40SISO	Ant1	5510	37.851	≤40	PASS
NTNV	11AX40SISO	Ant1	5670	37.797	≤40	PASS

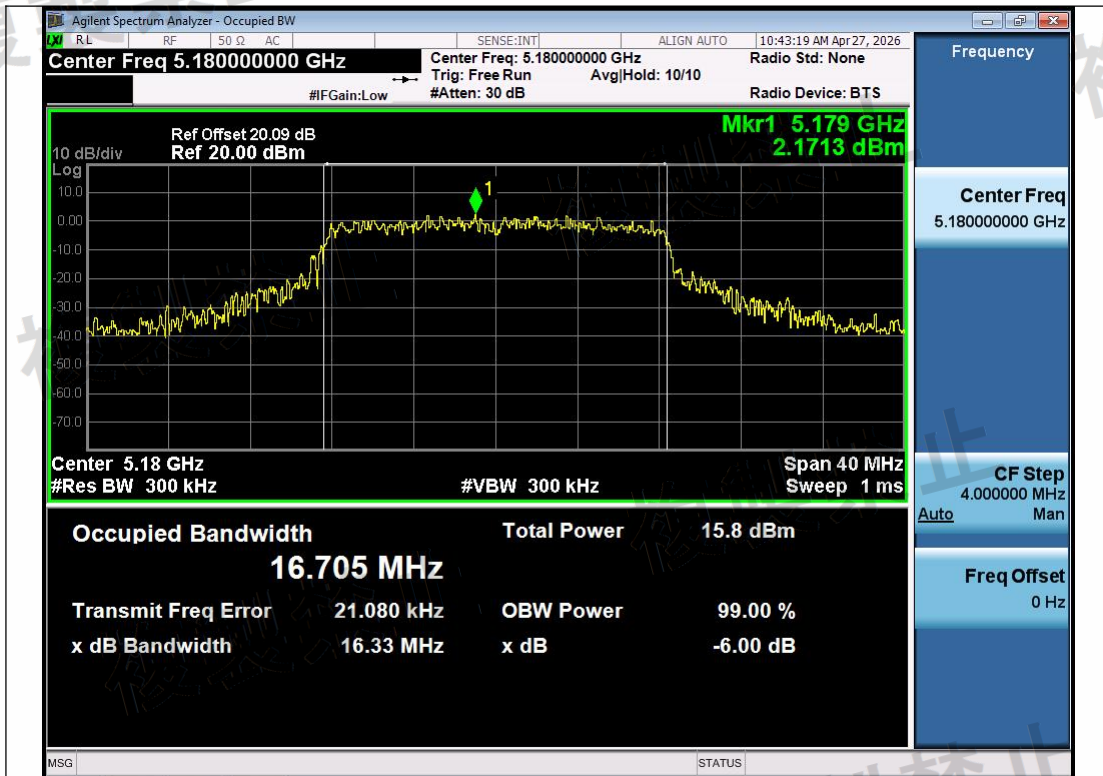



NTNV-11A-Ant1-5180-PASS

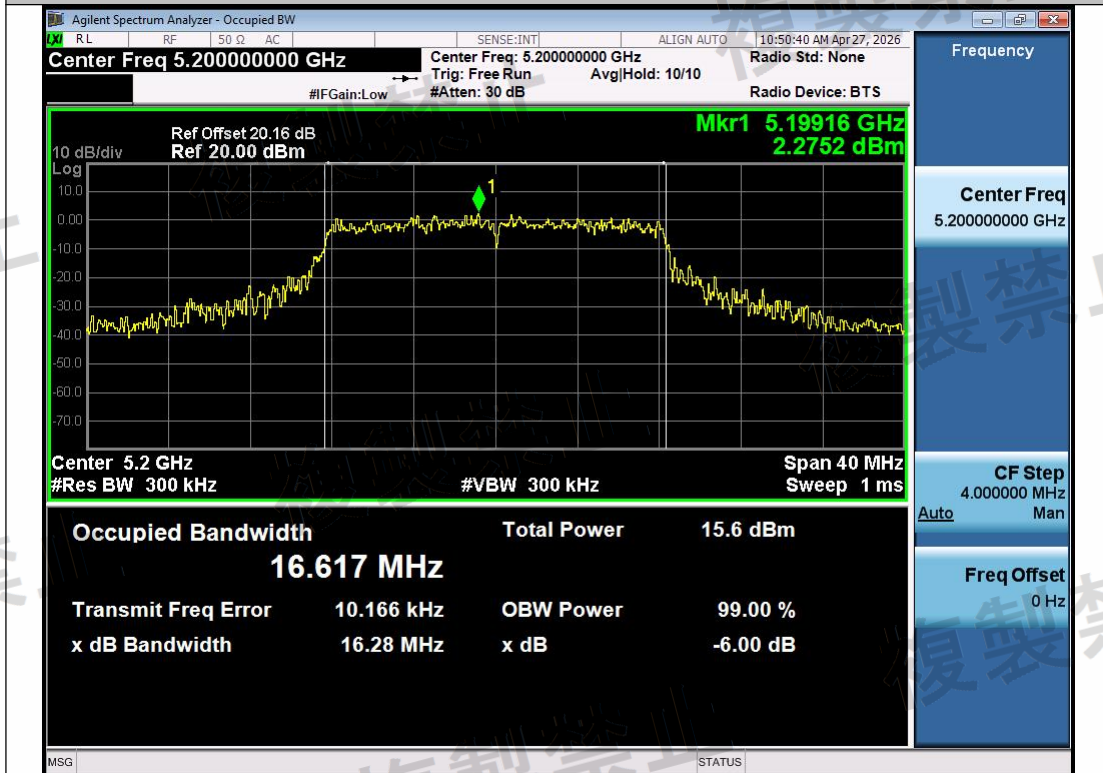



NTNV-11A-Ant1-5200-PASS

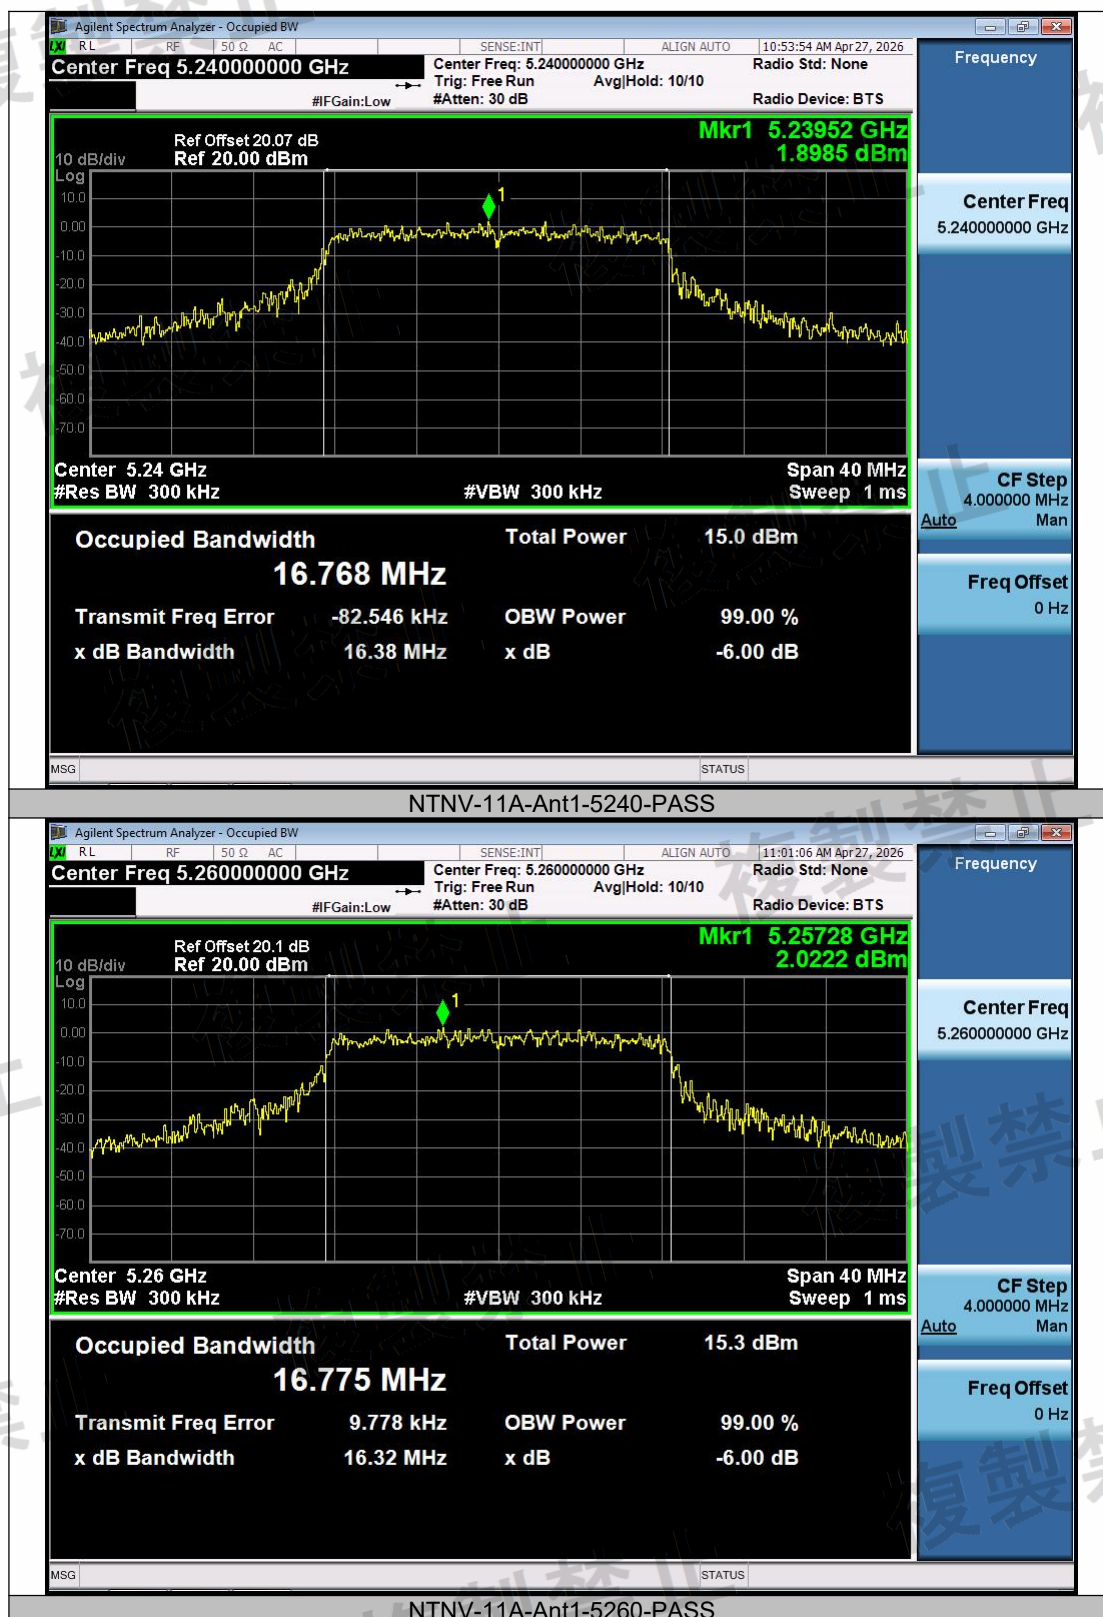


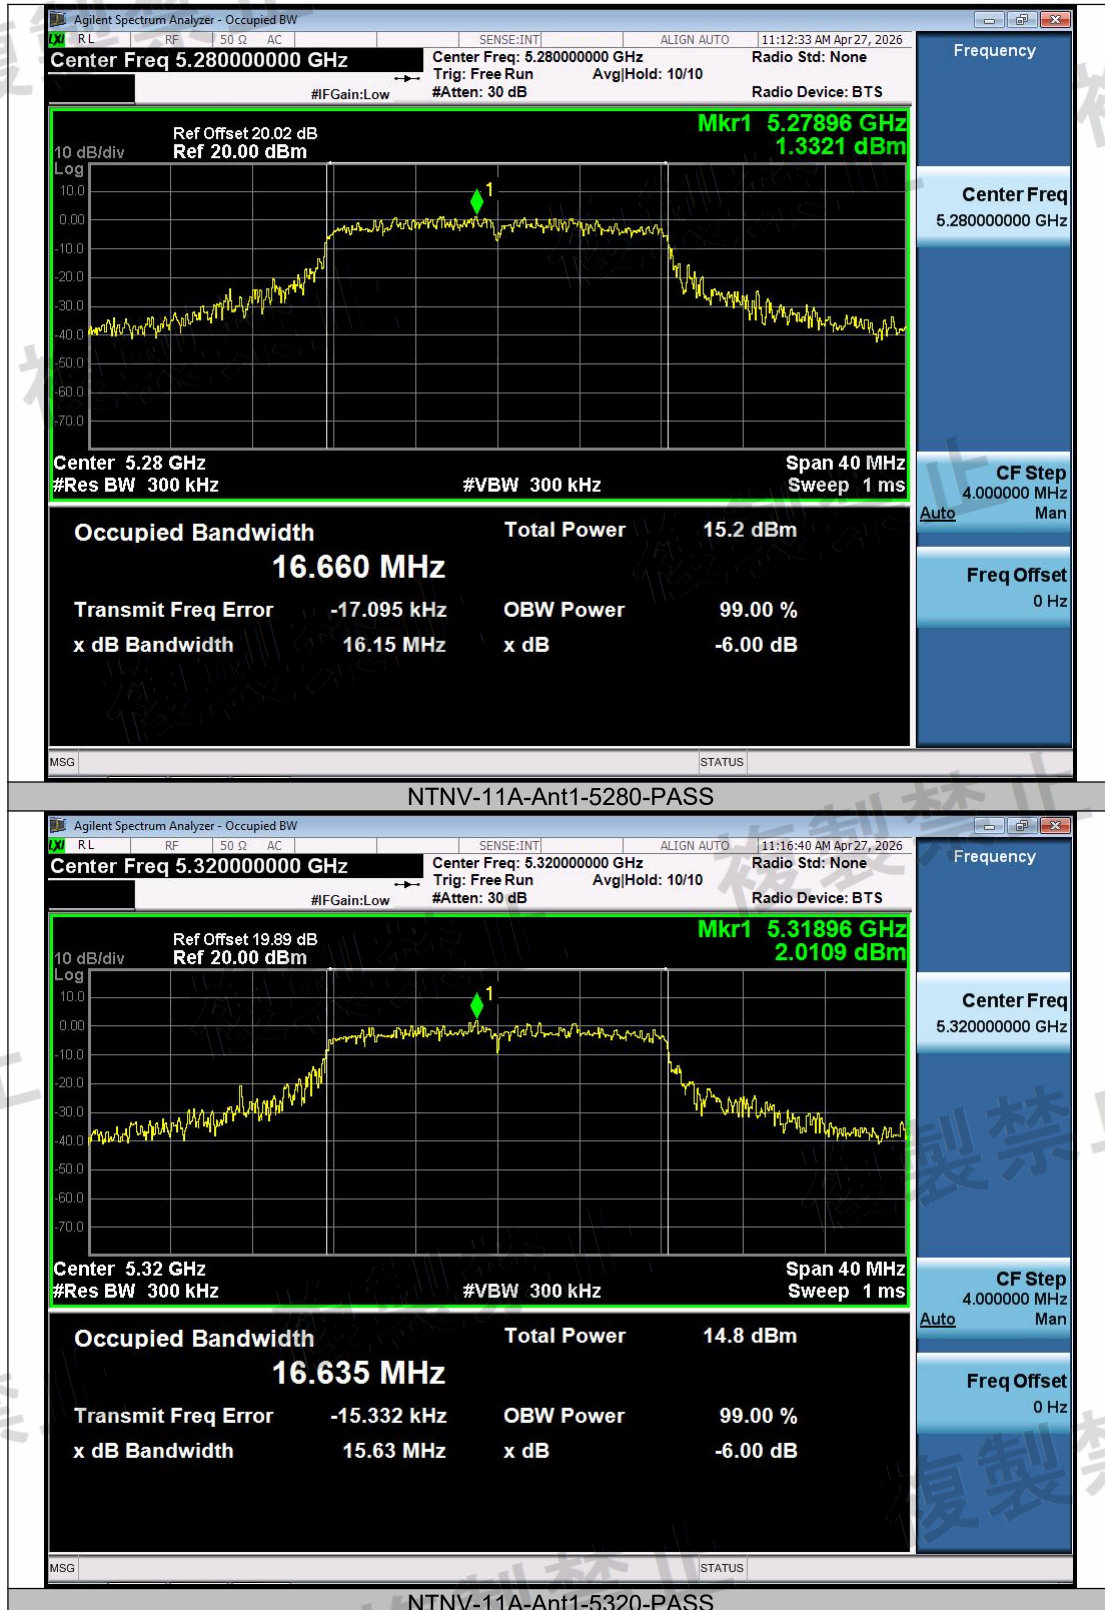


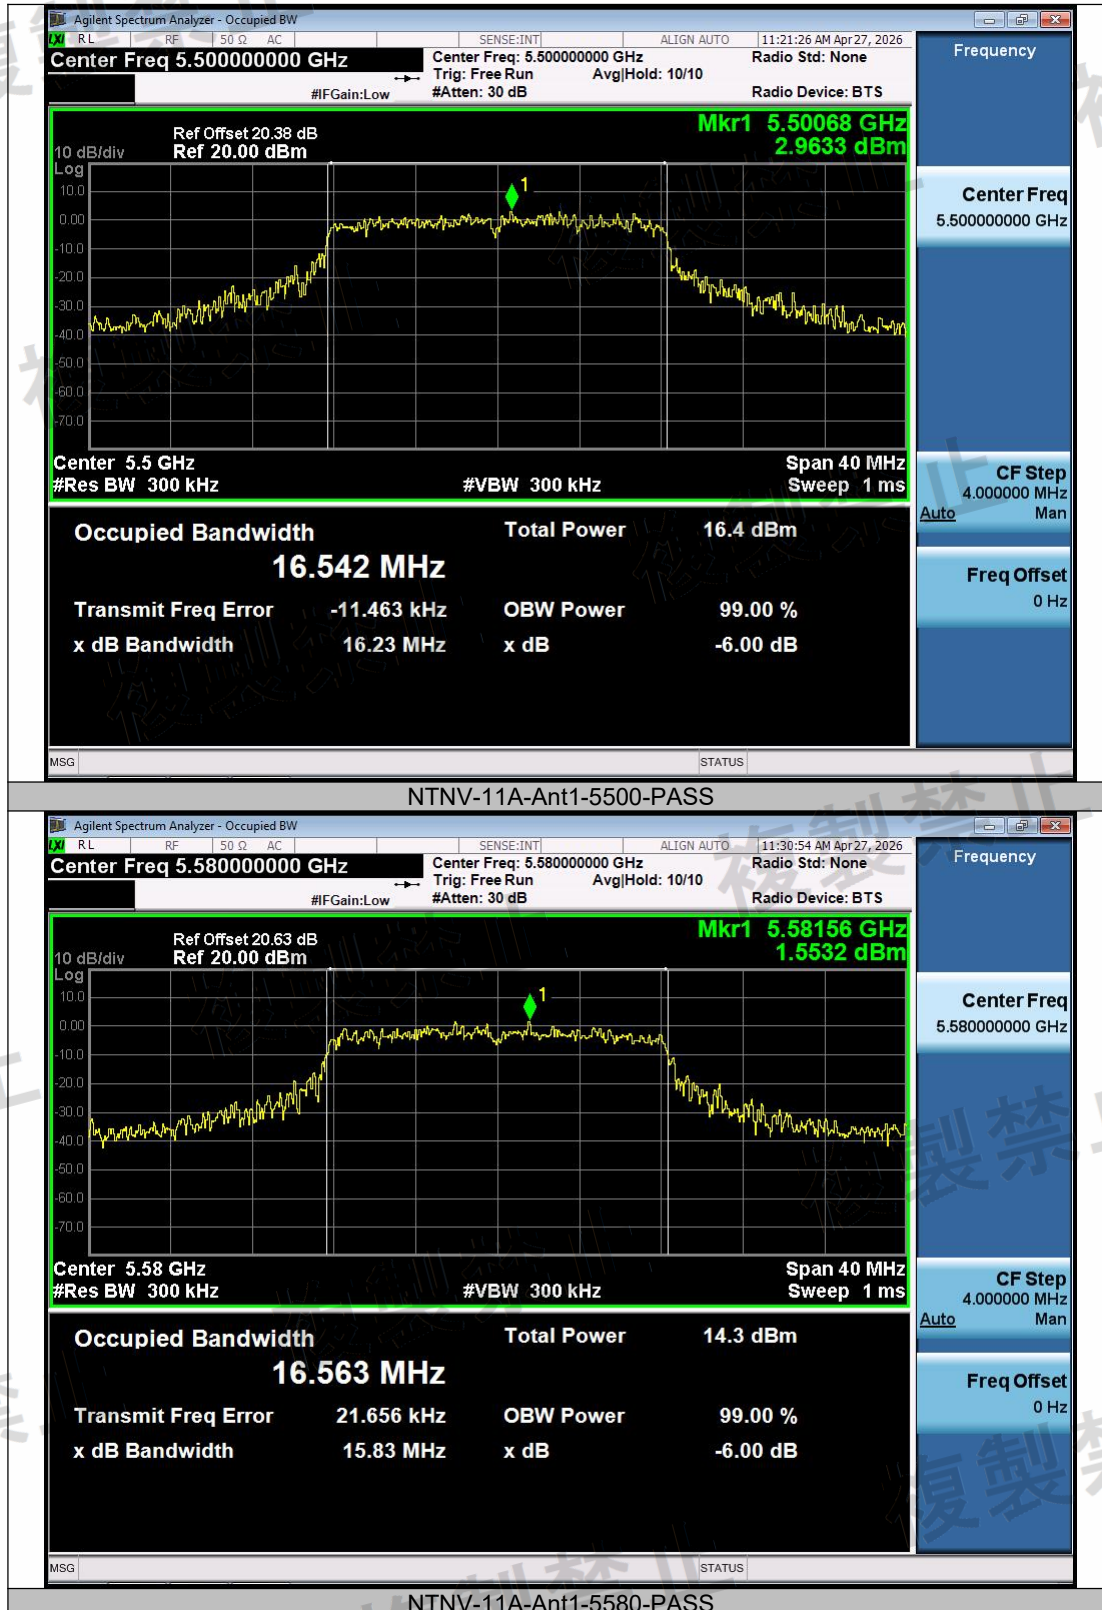


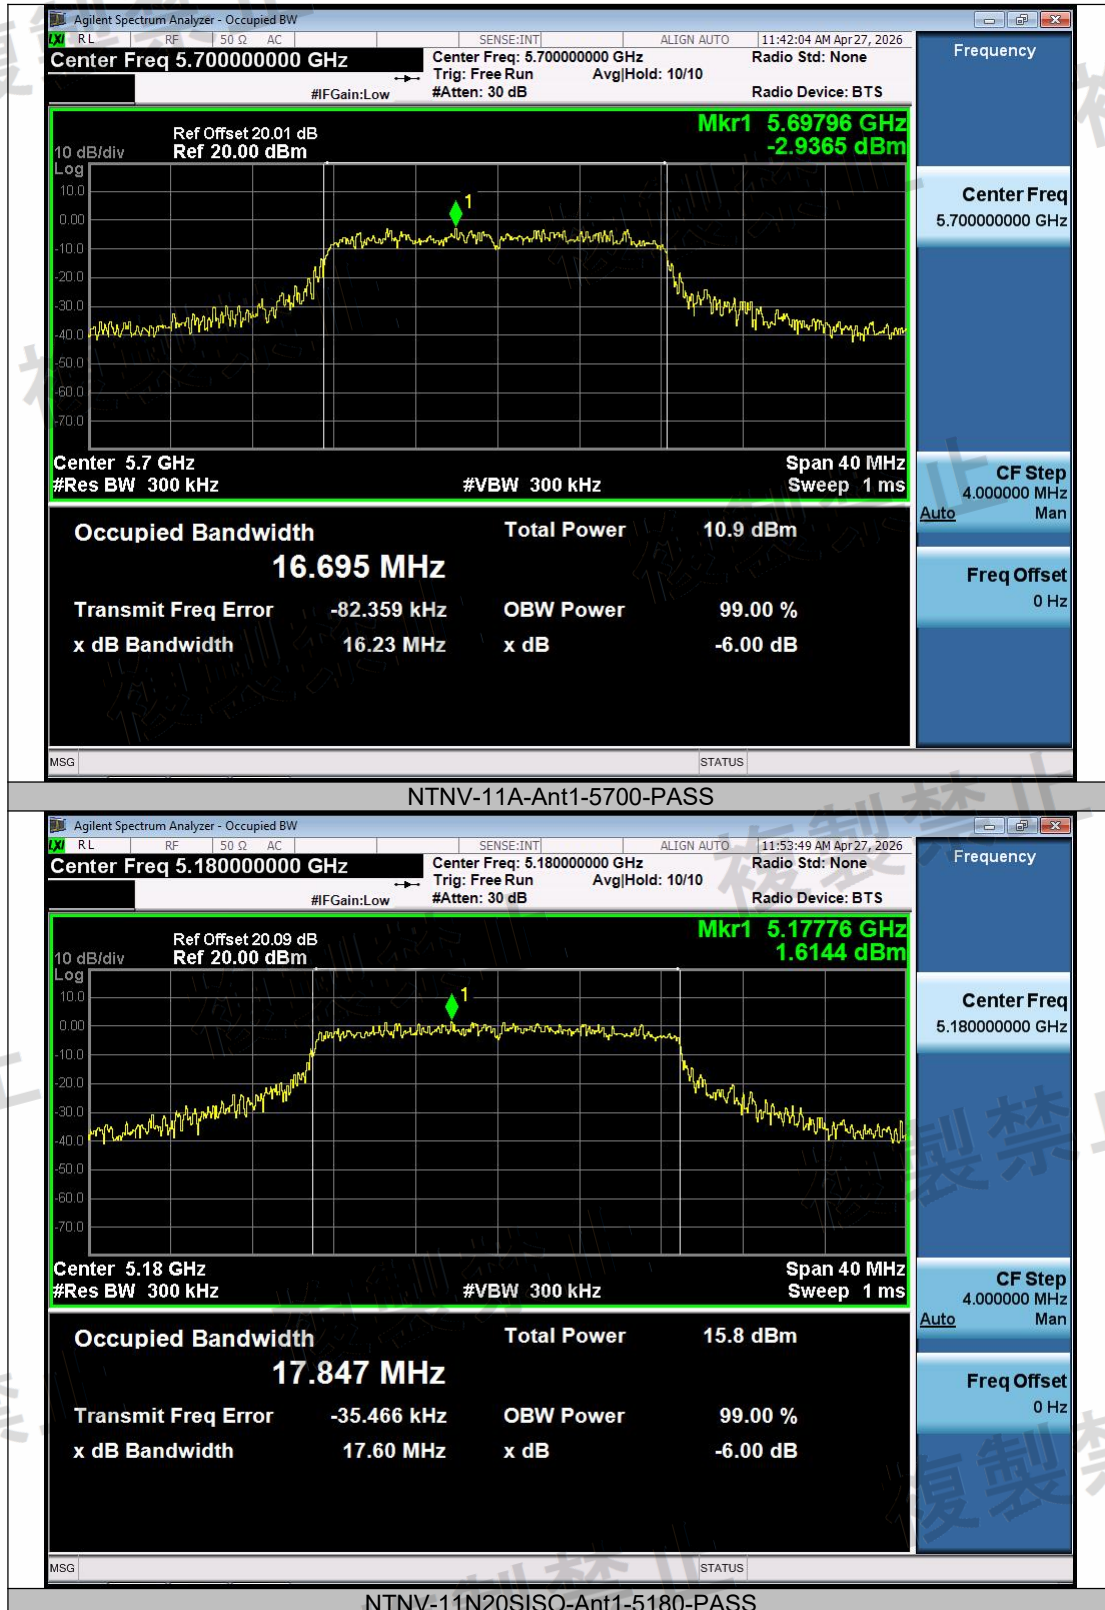


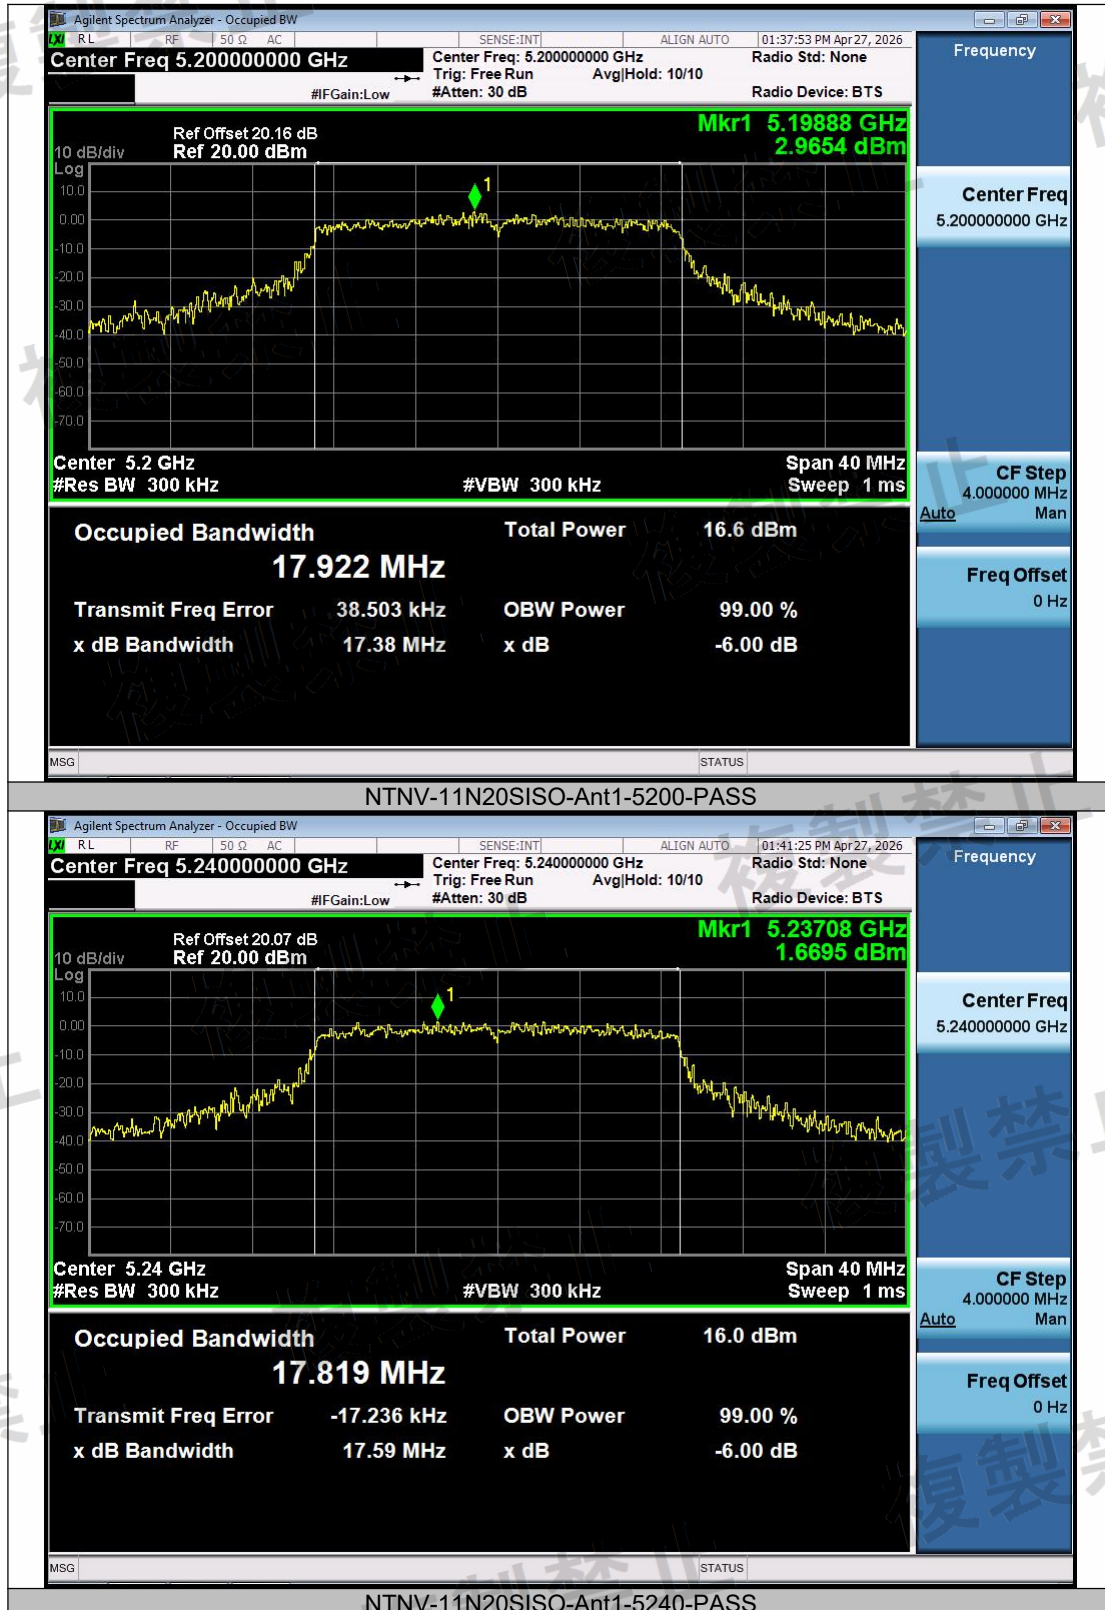


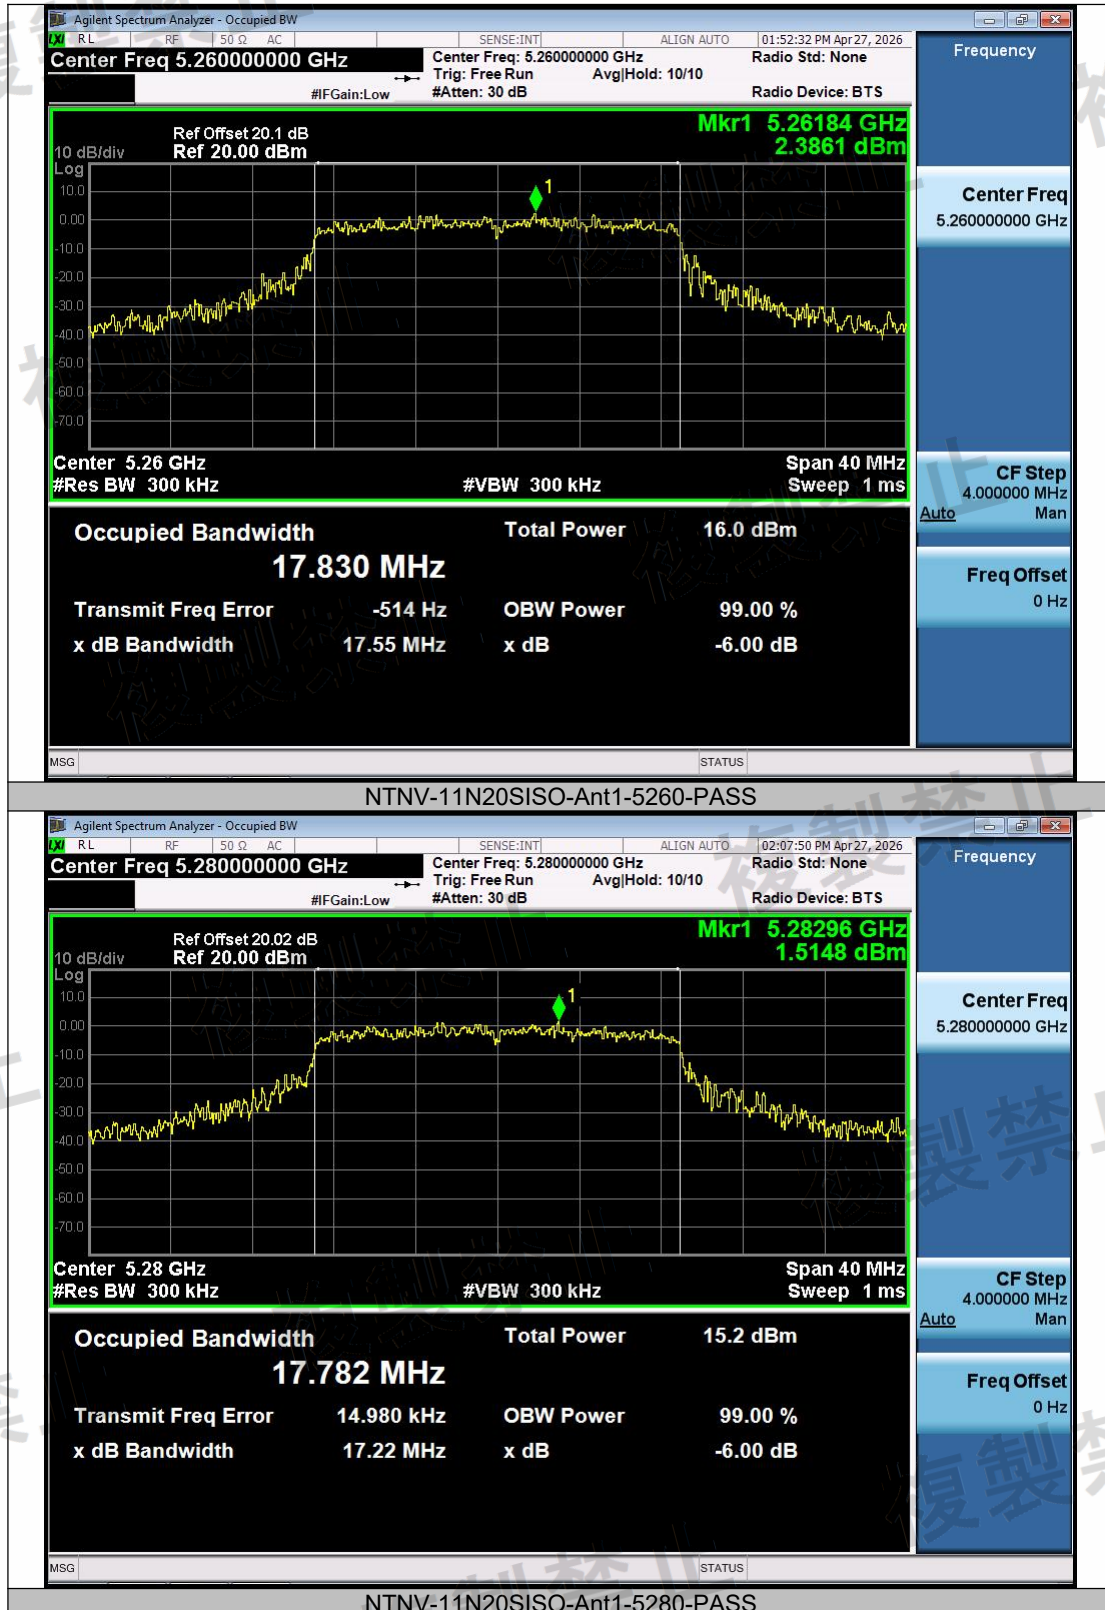


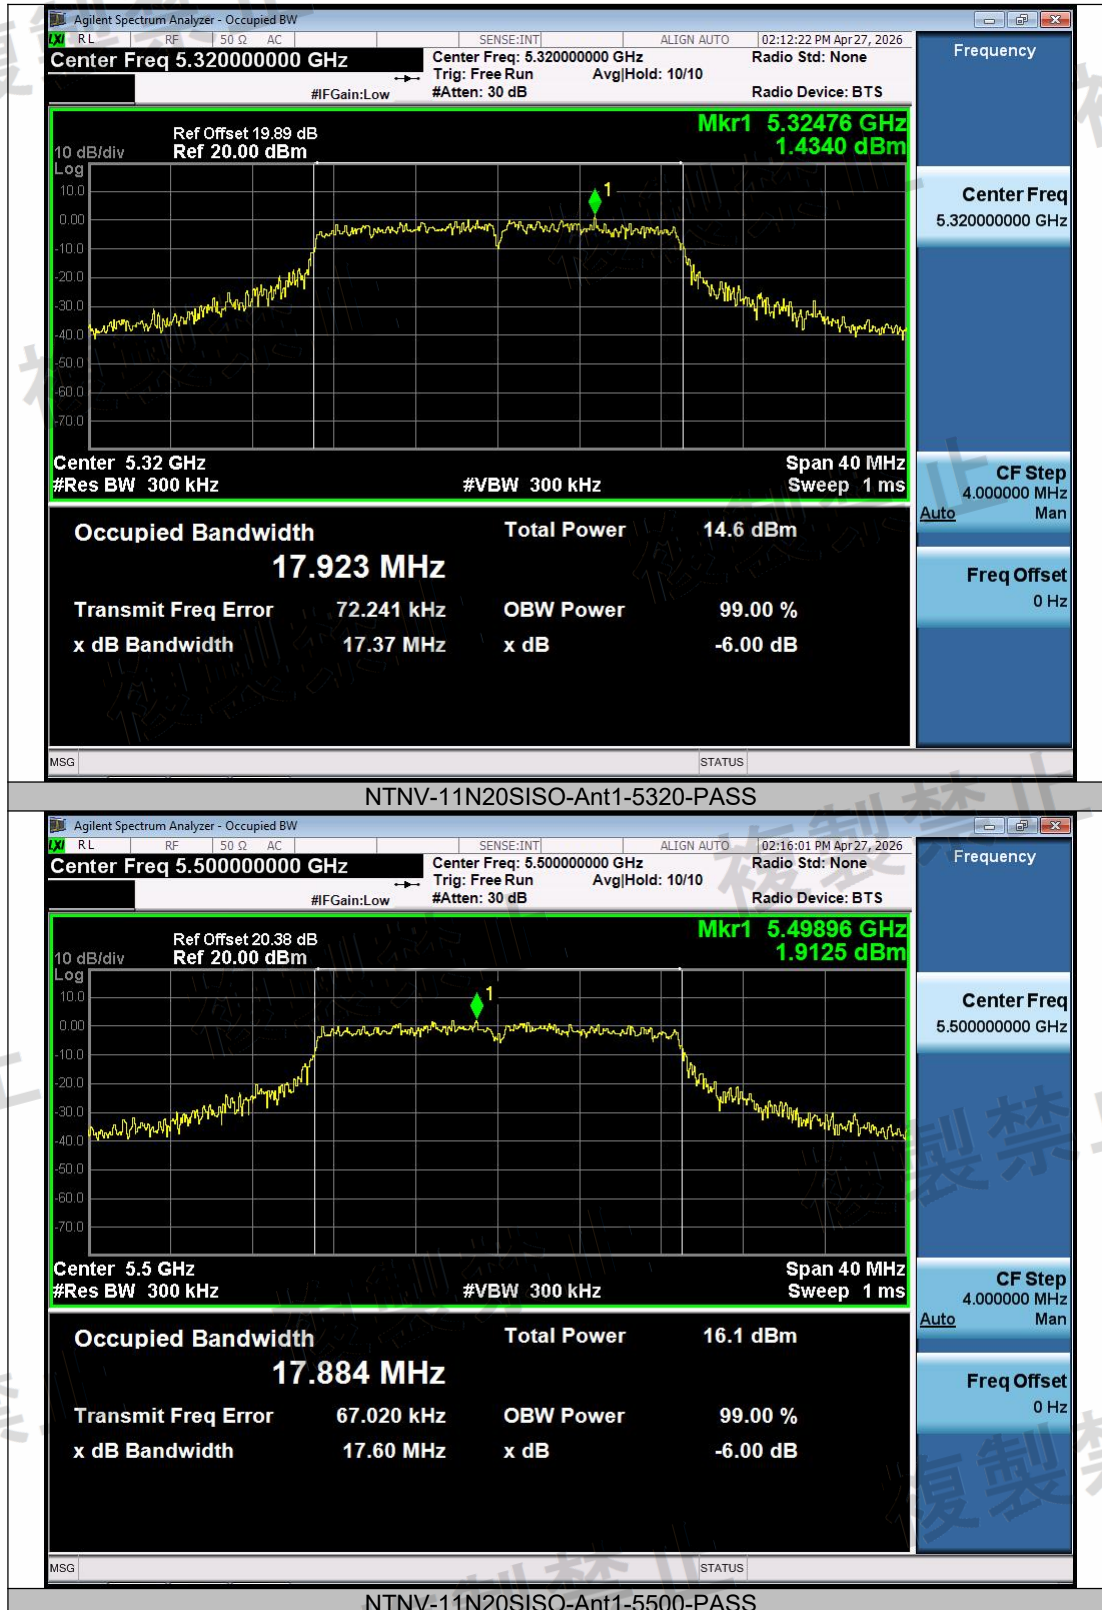


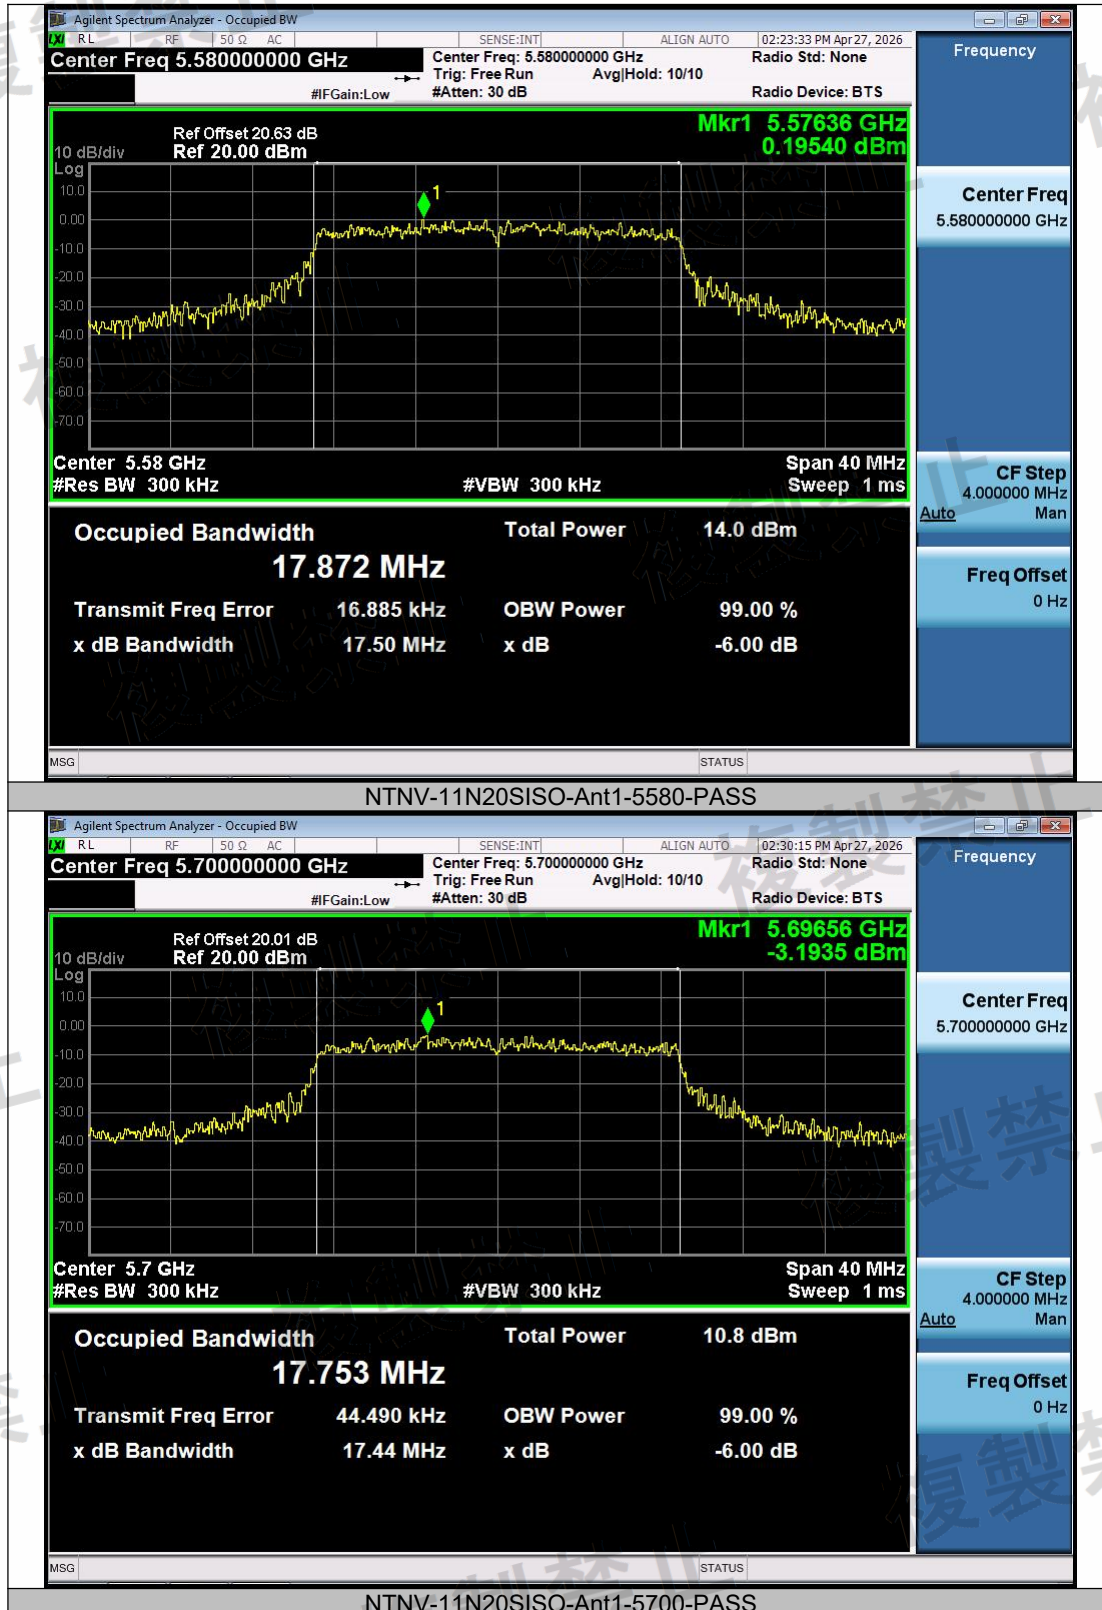


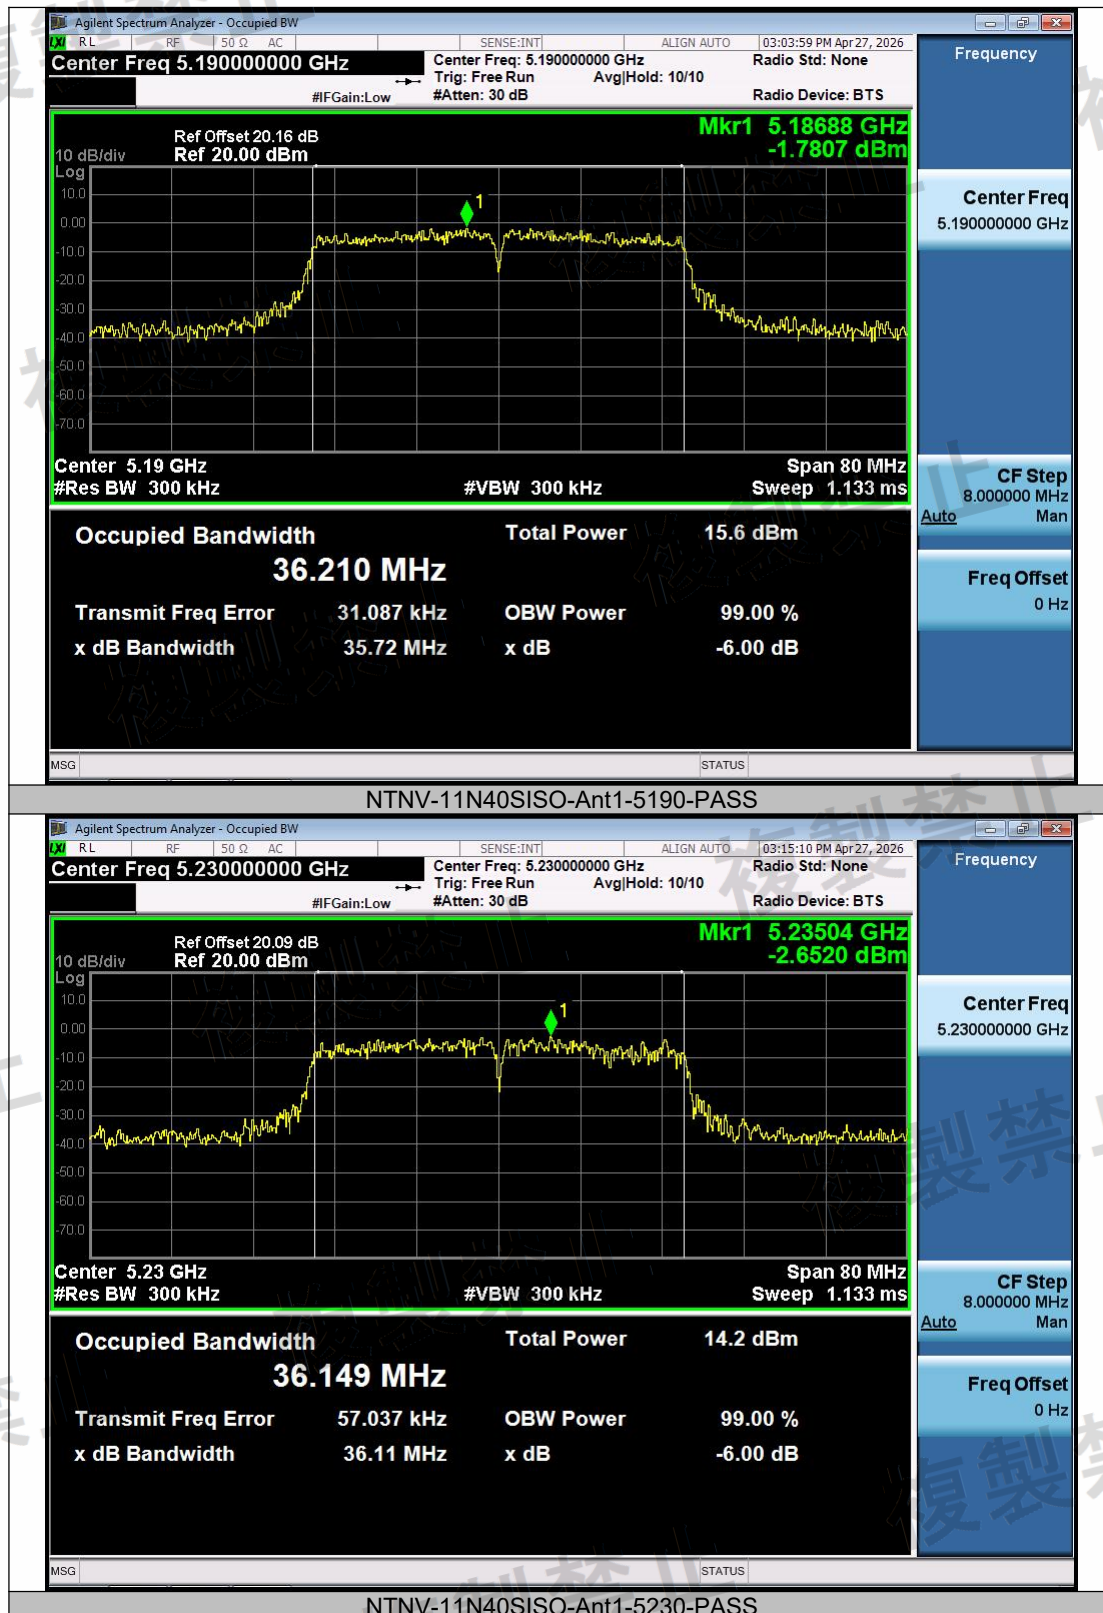


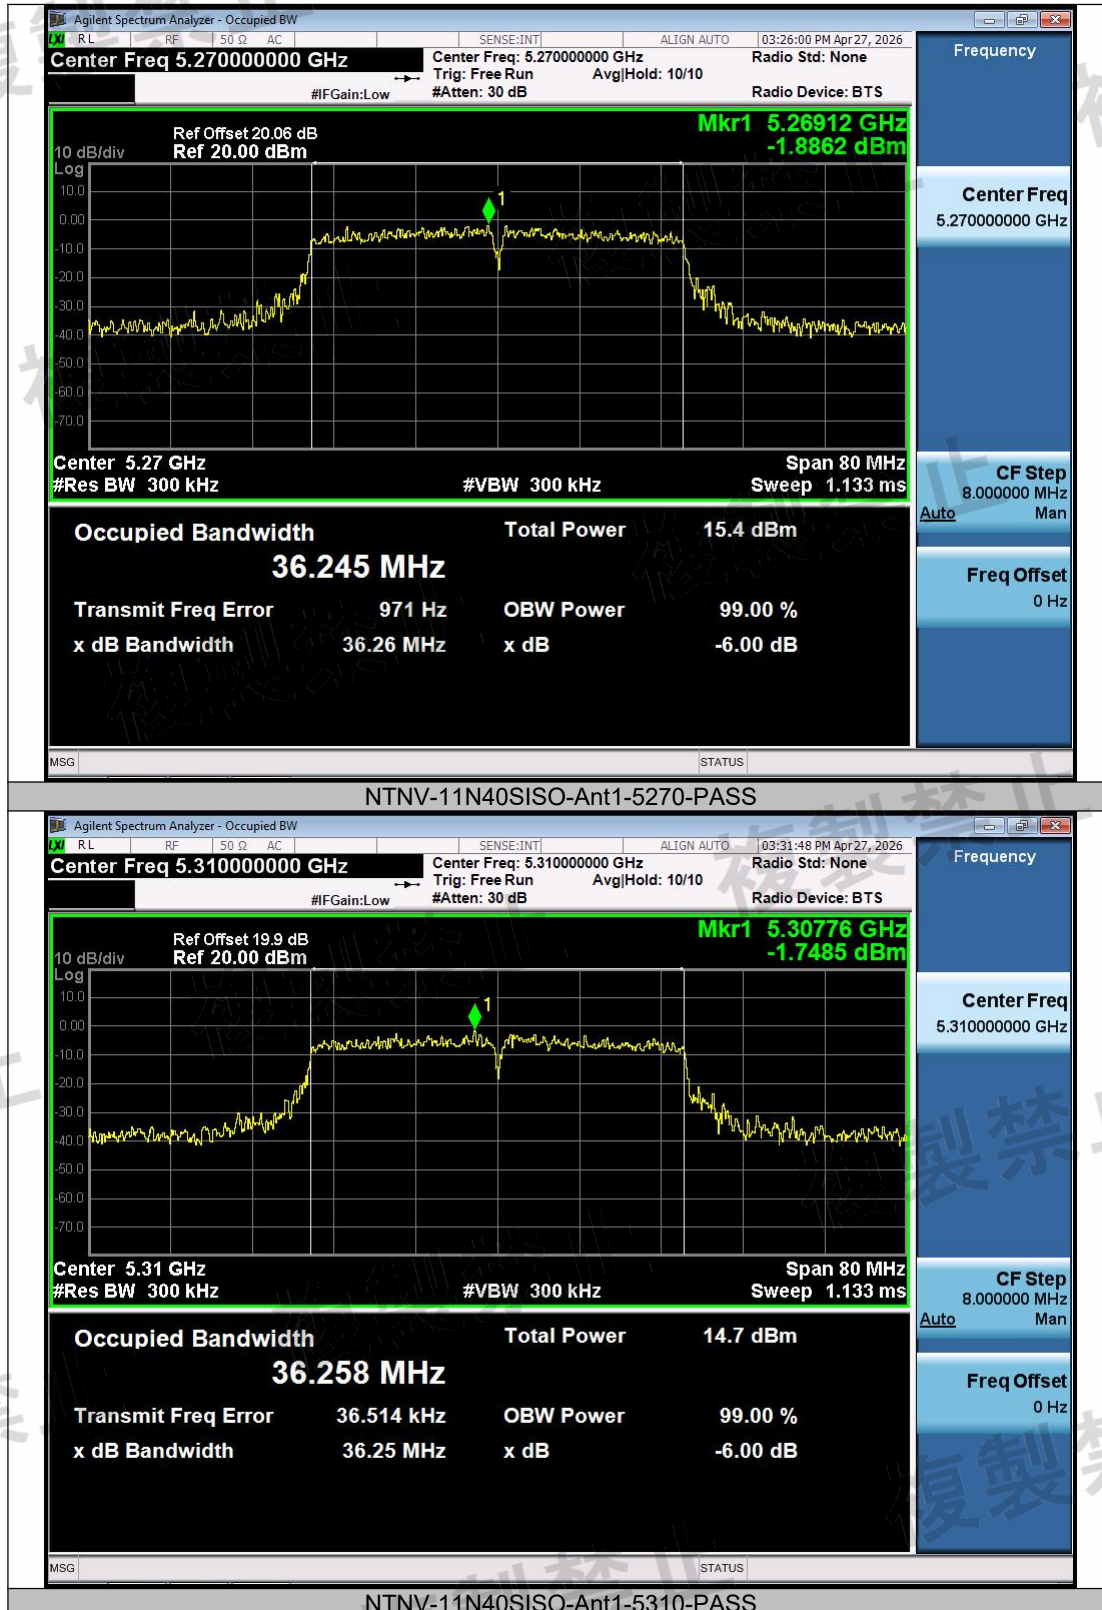


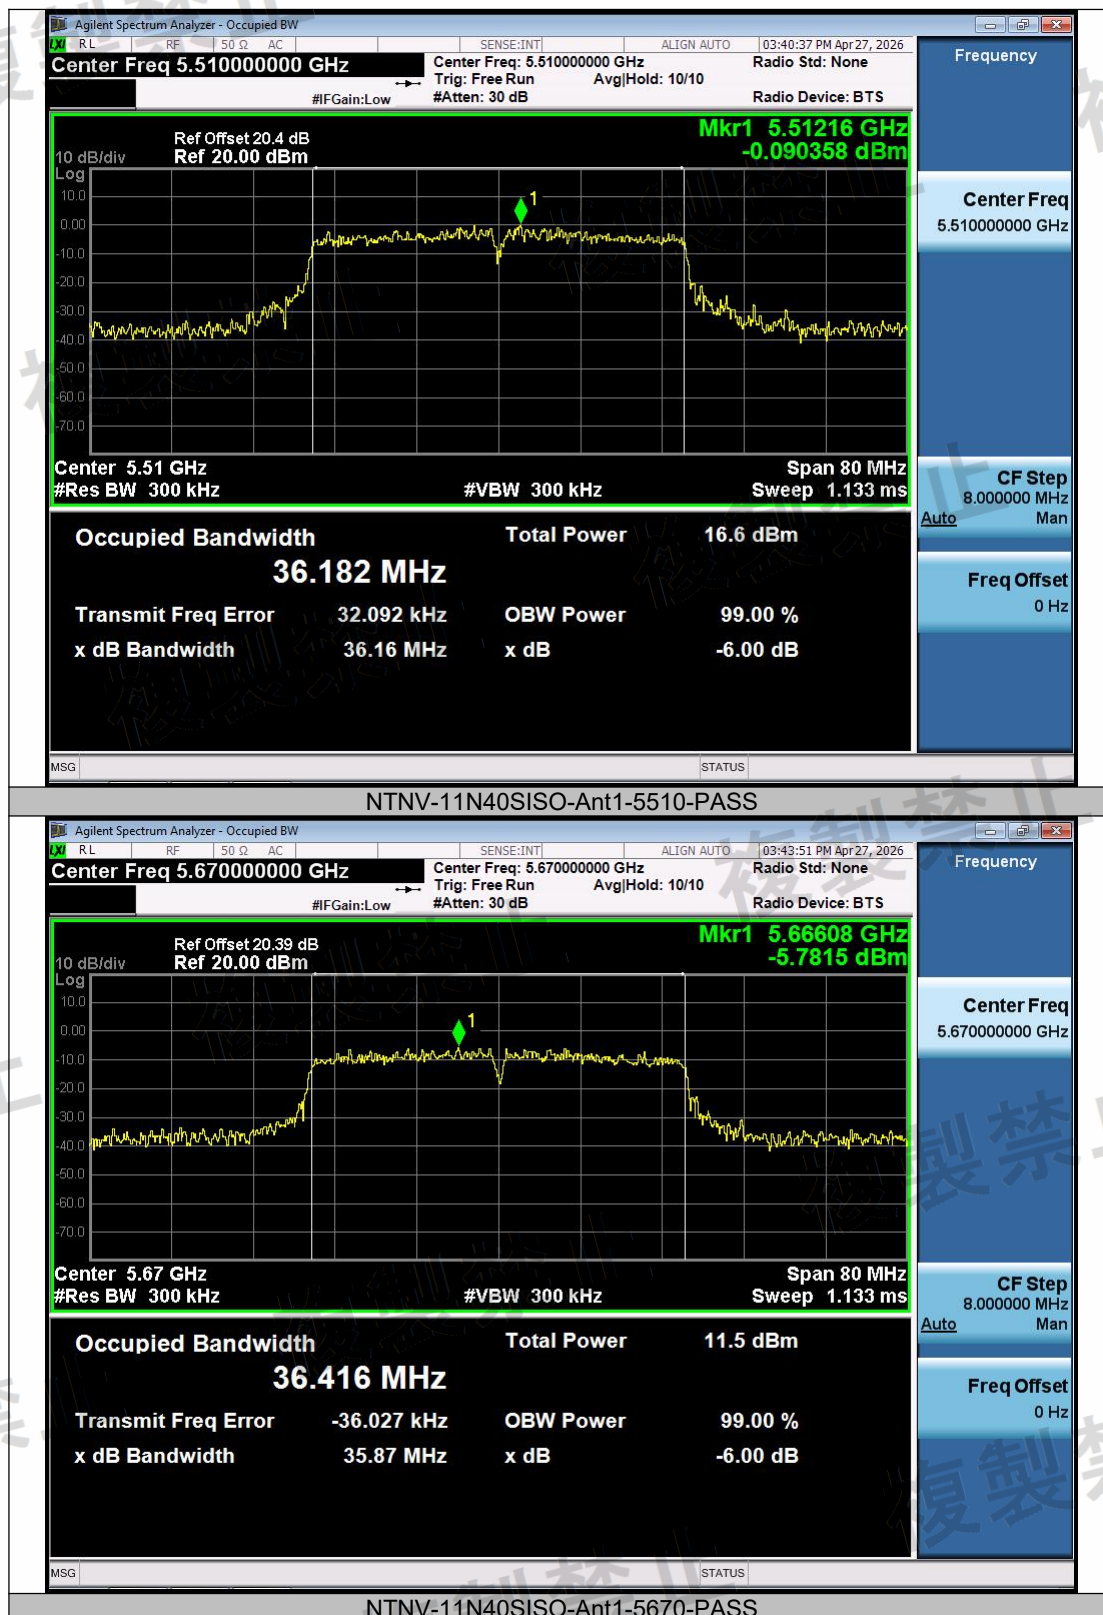


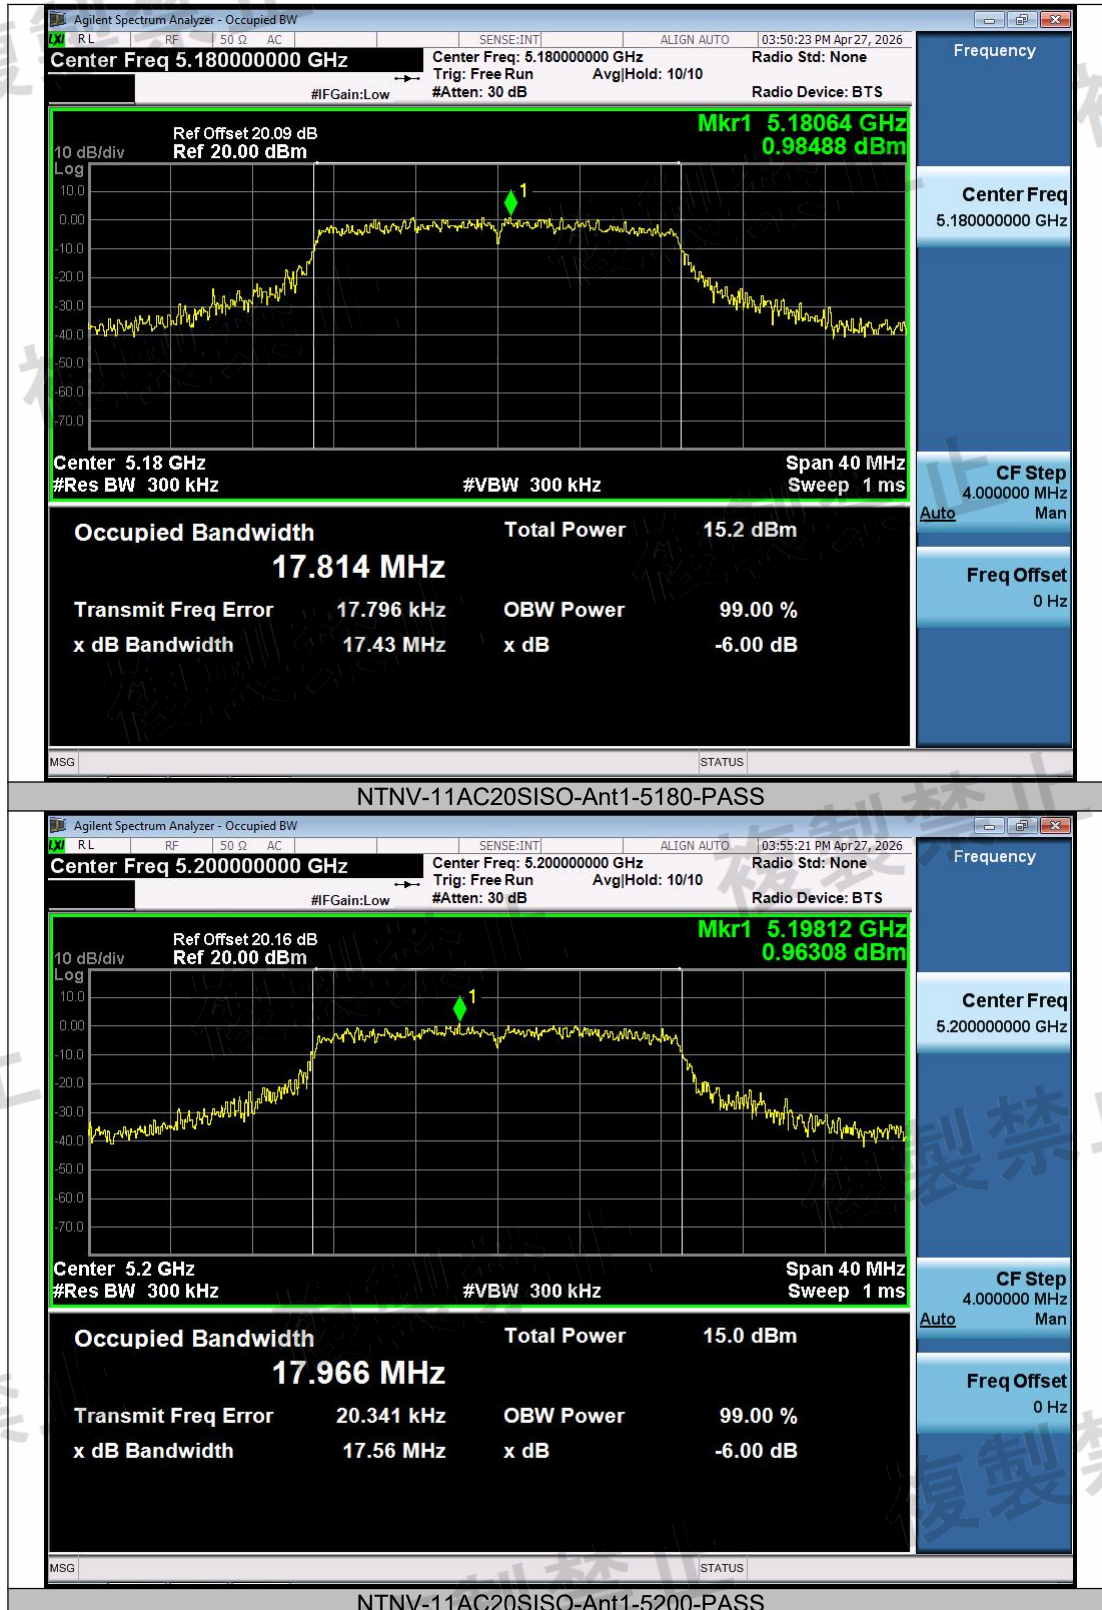


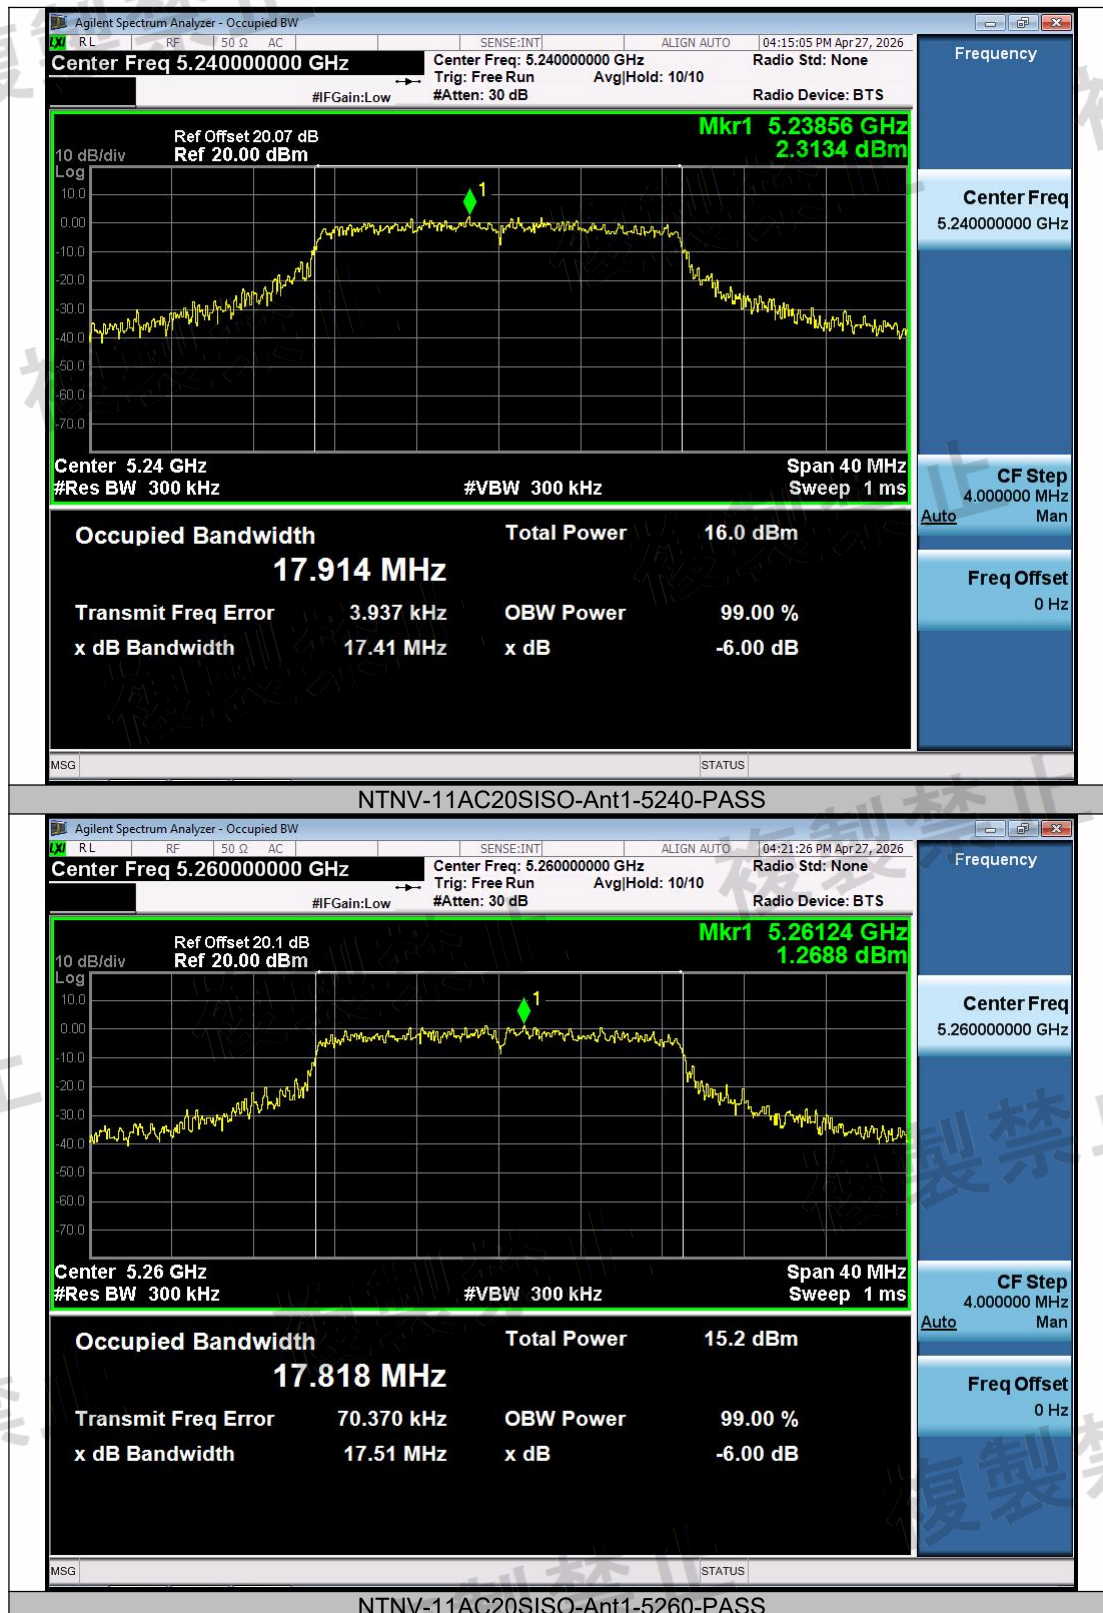


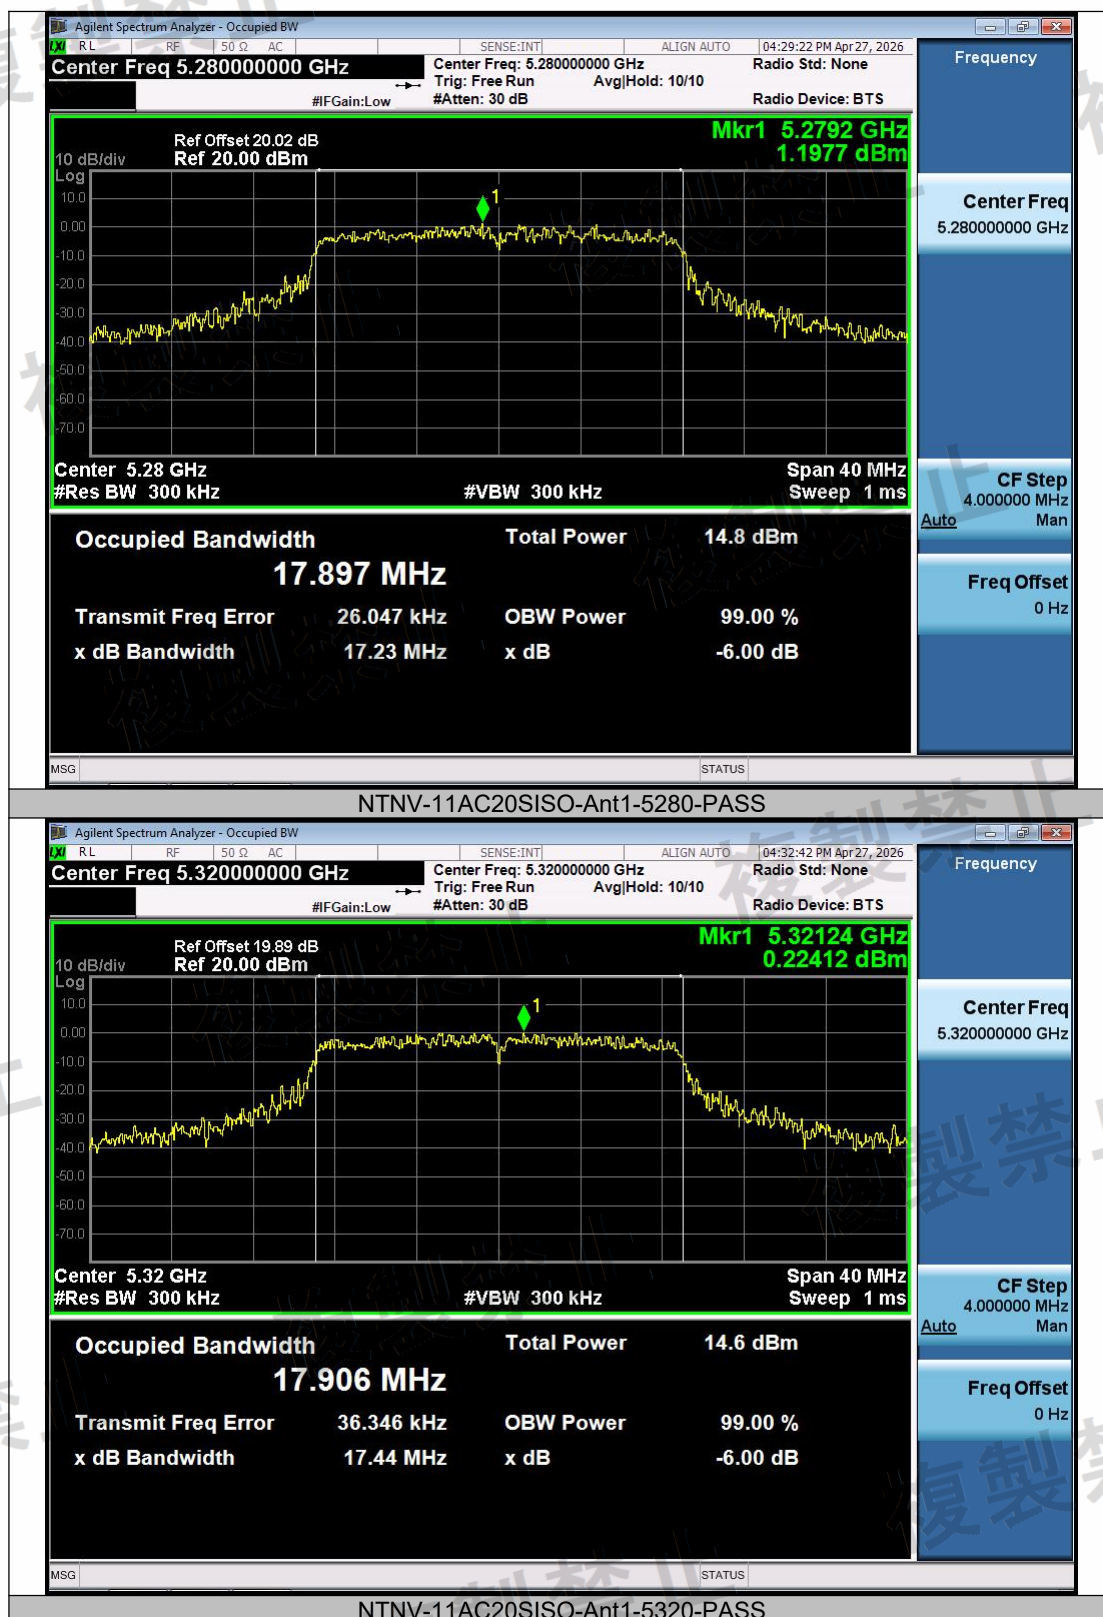


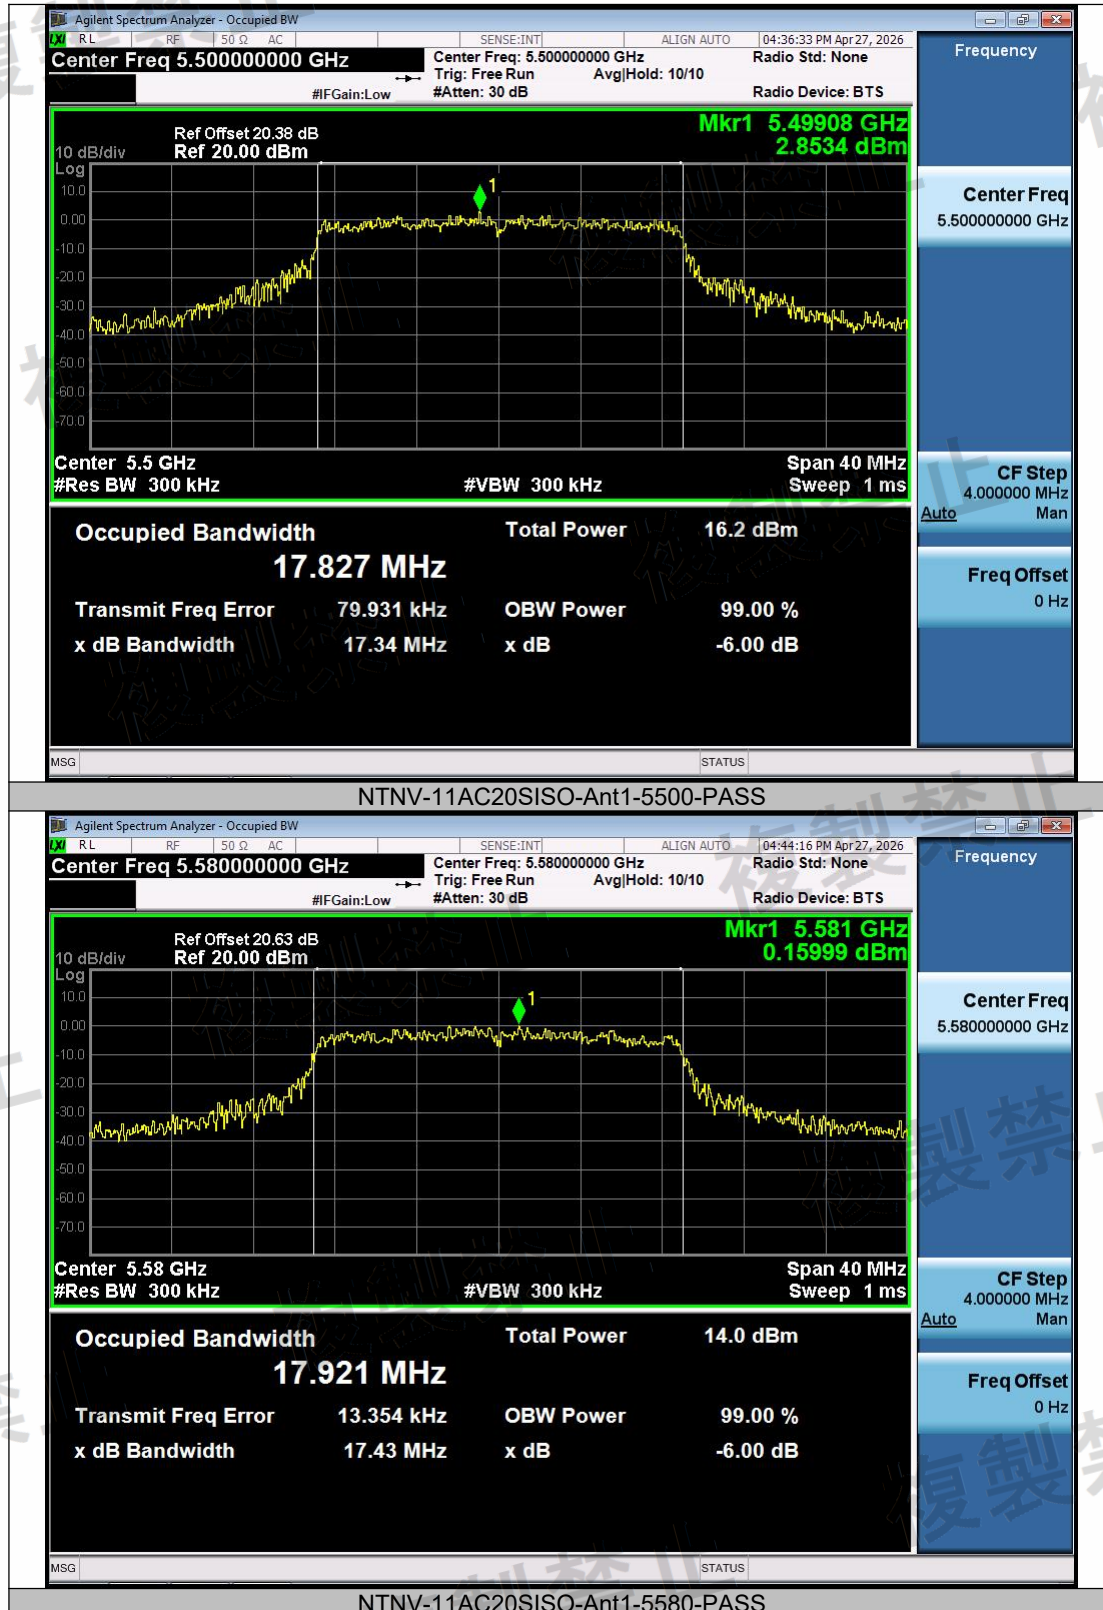


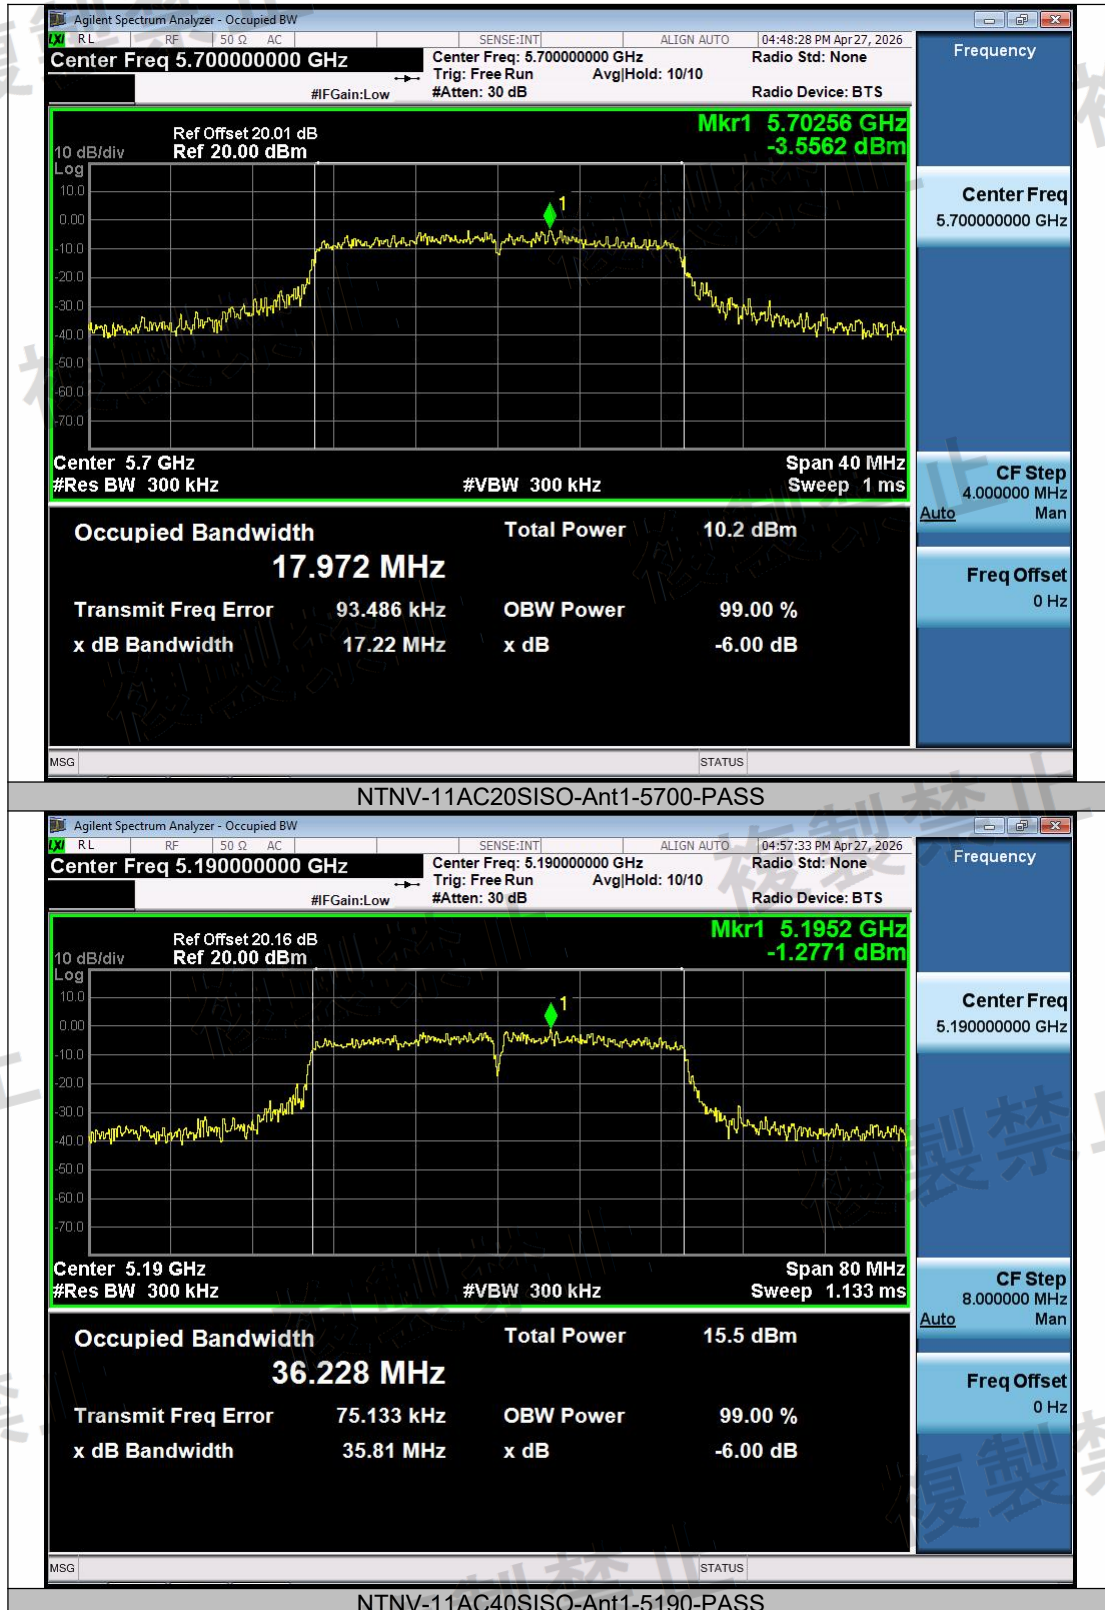


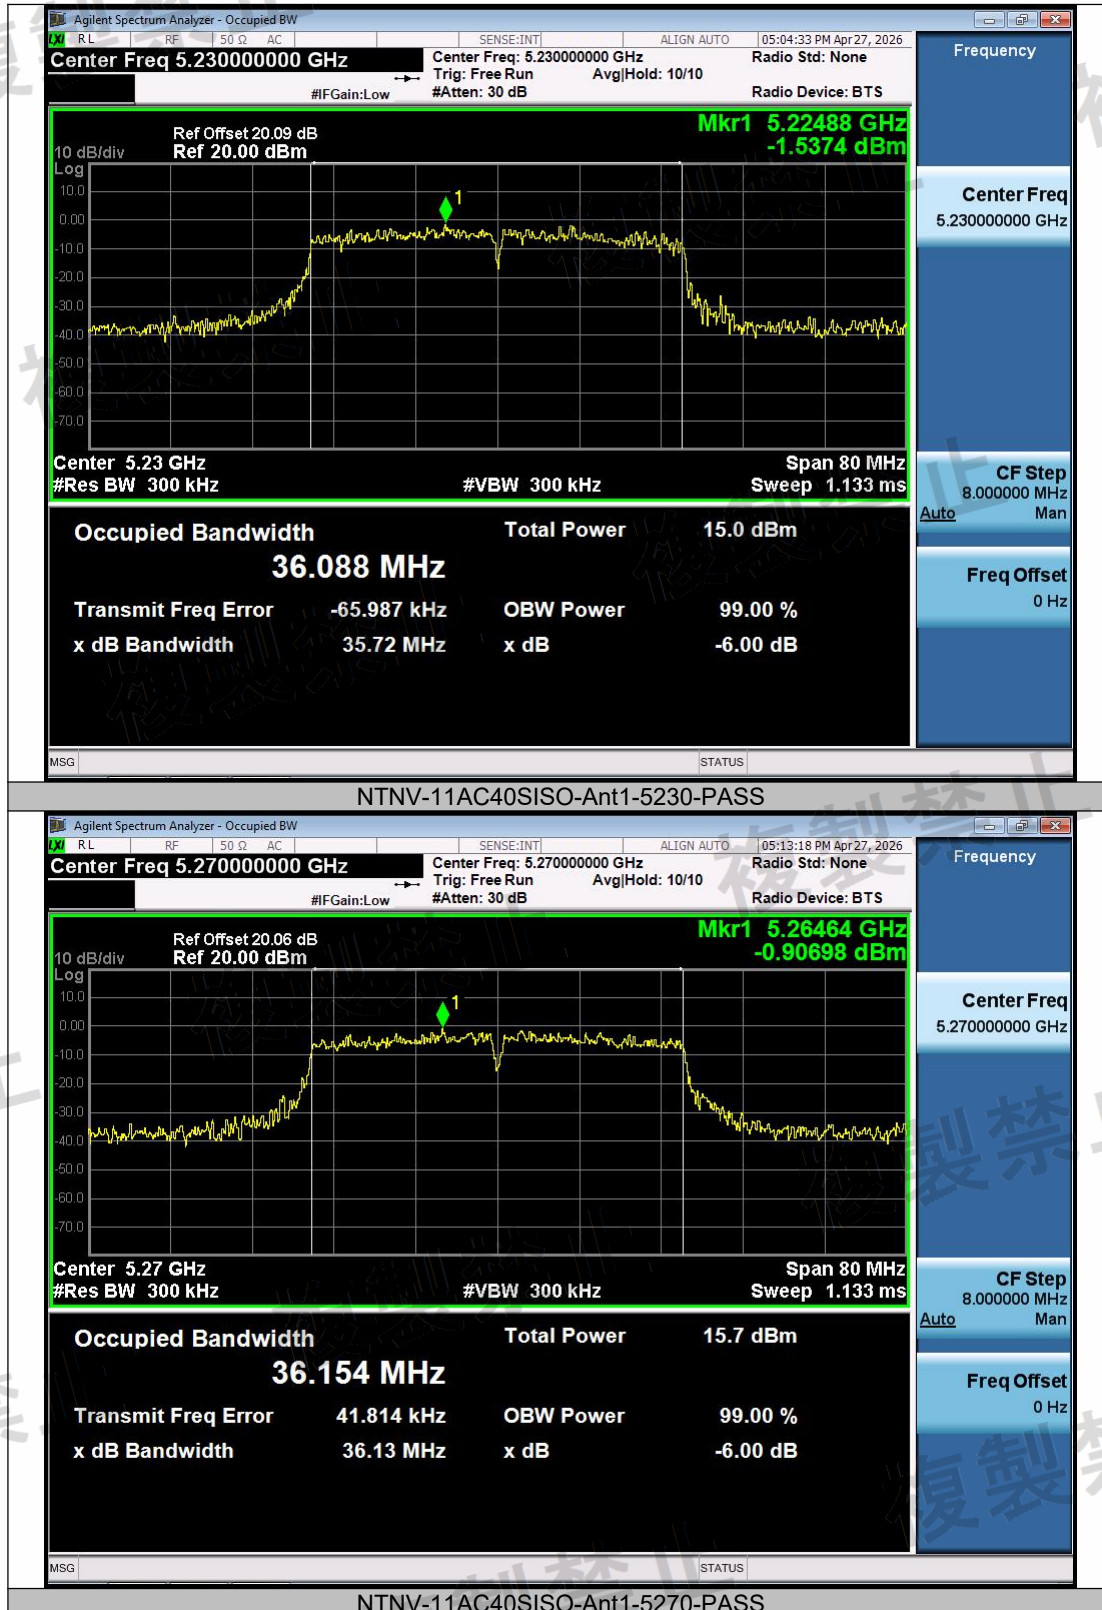


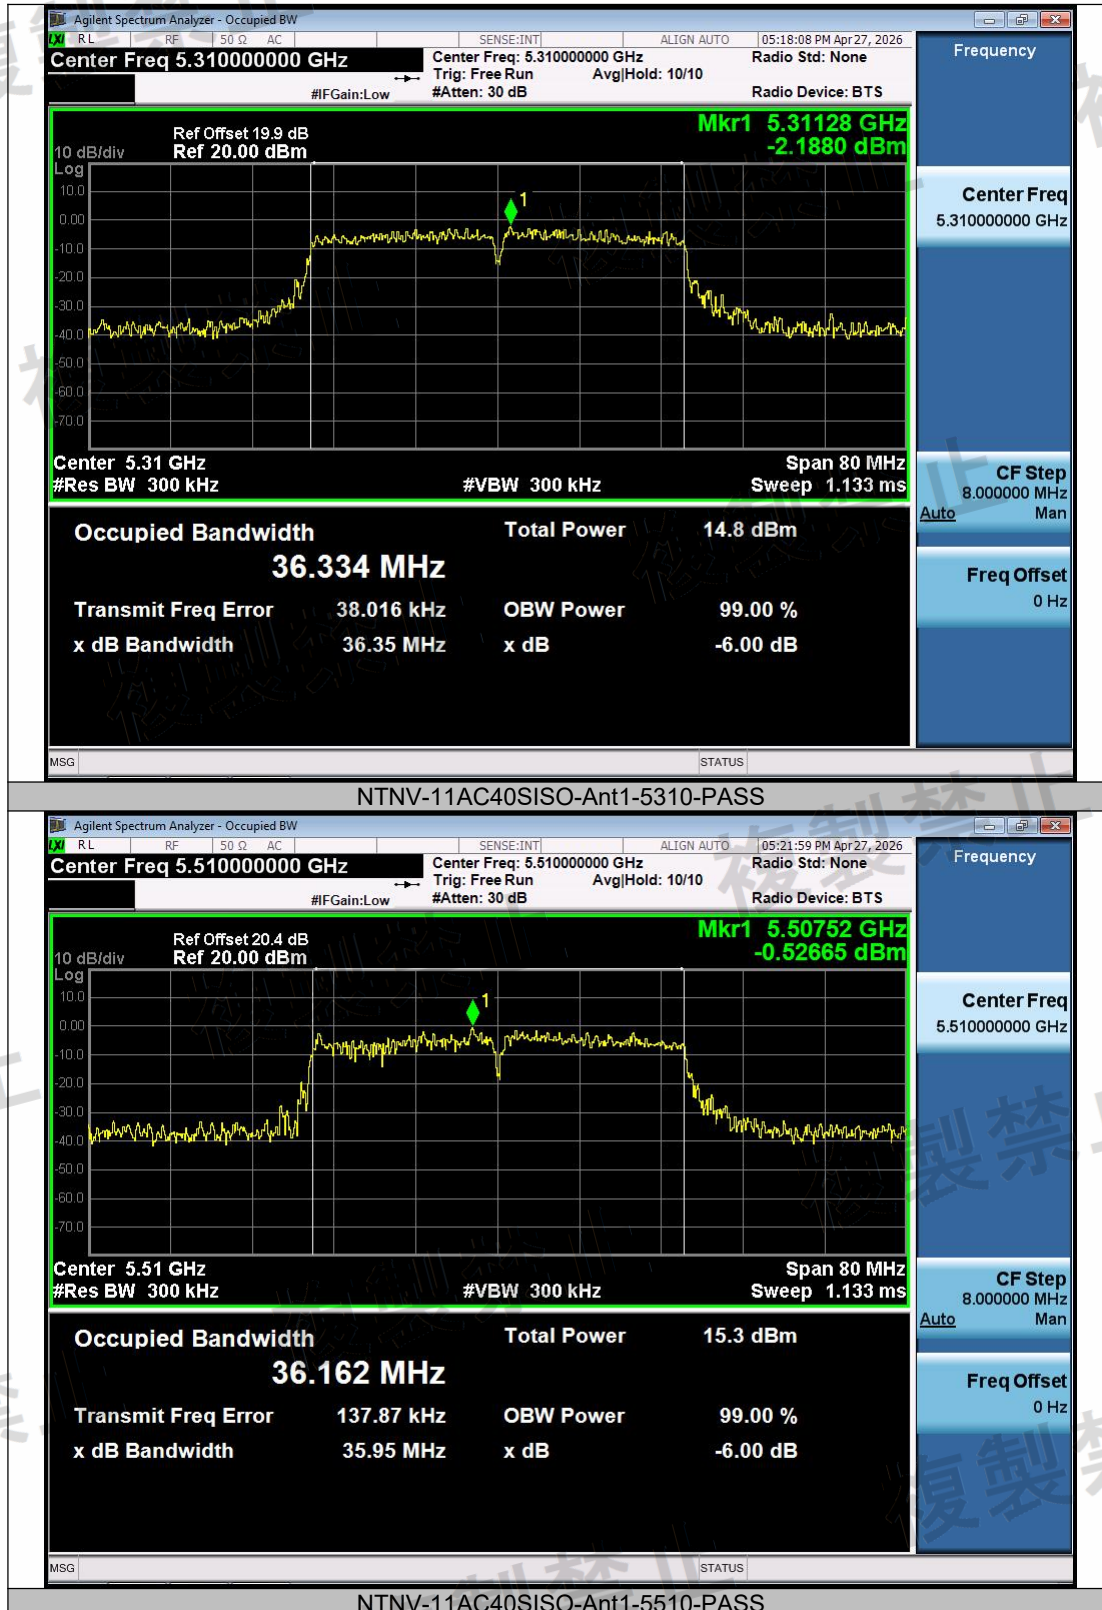


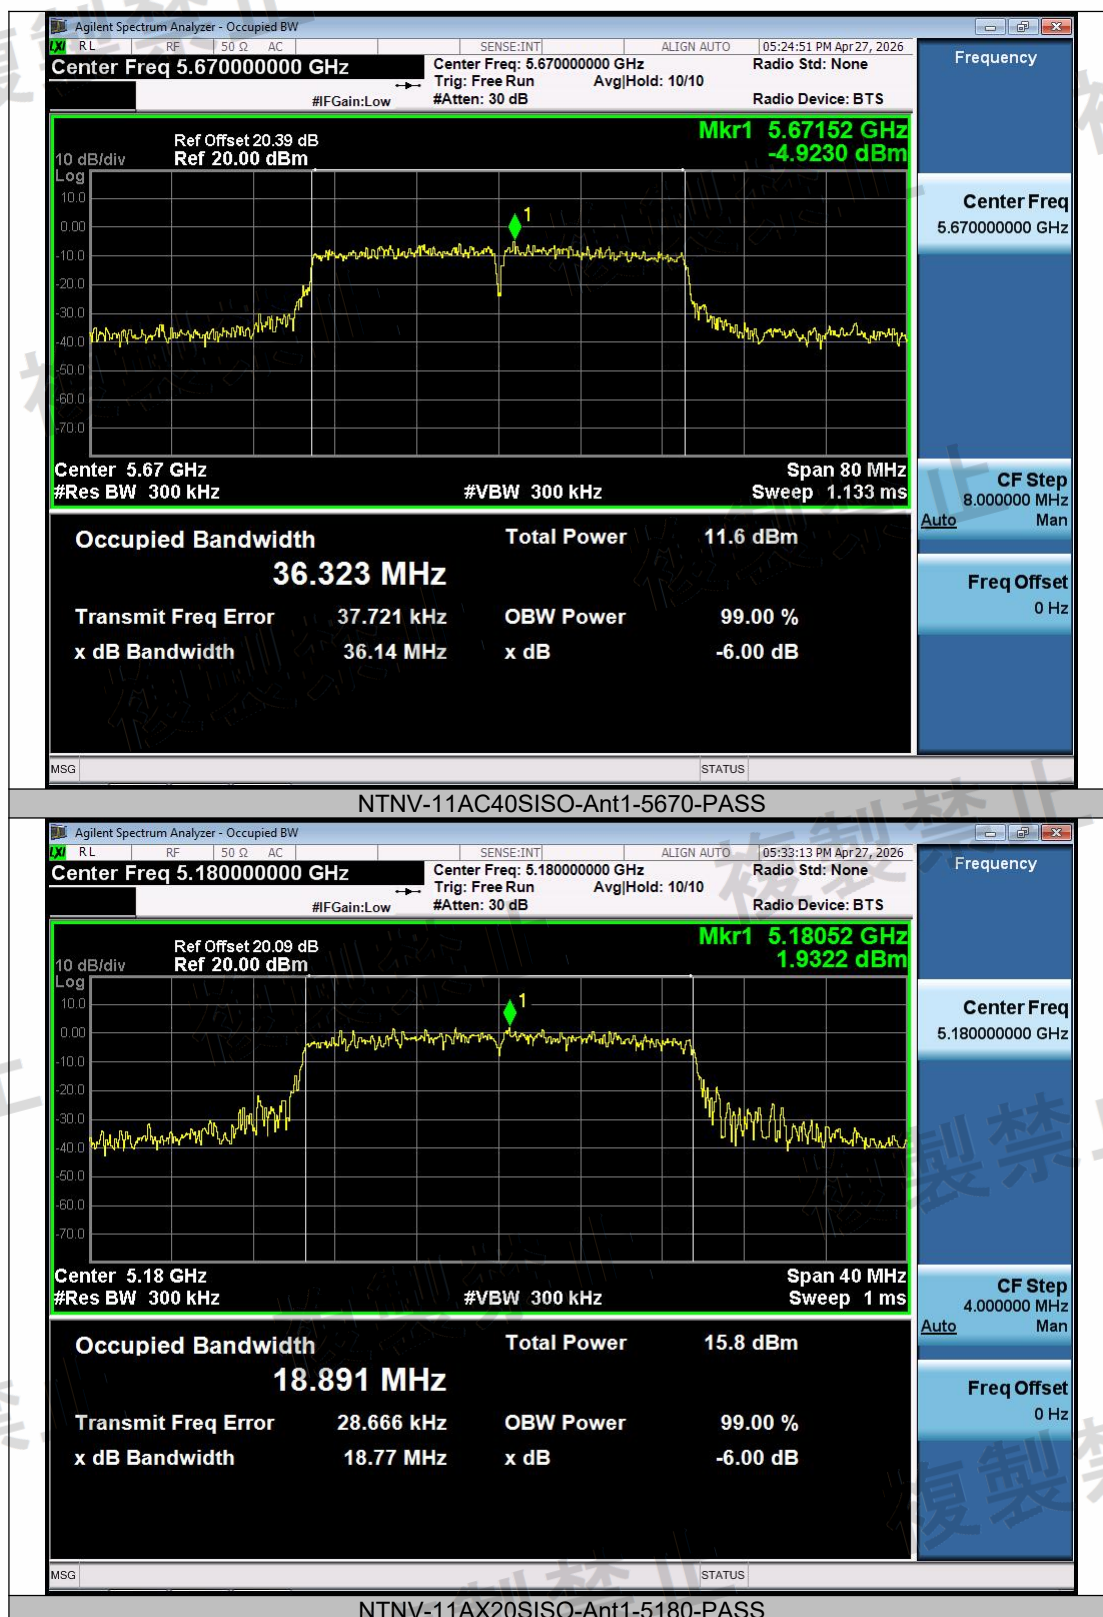


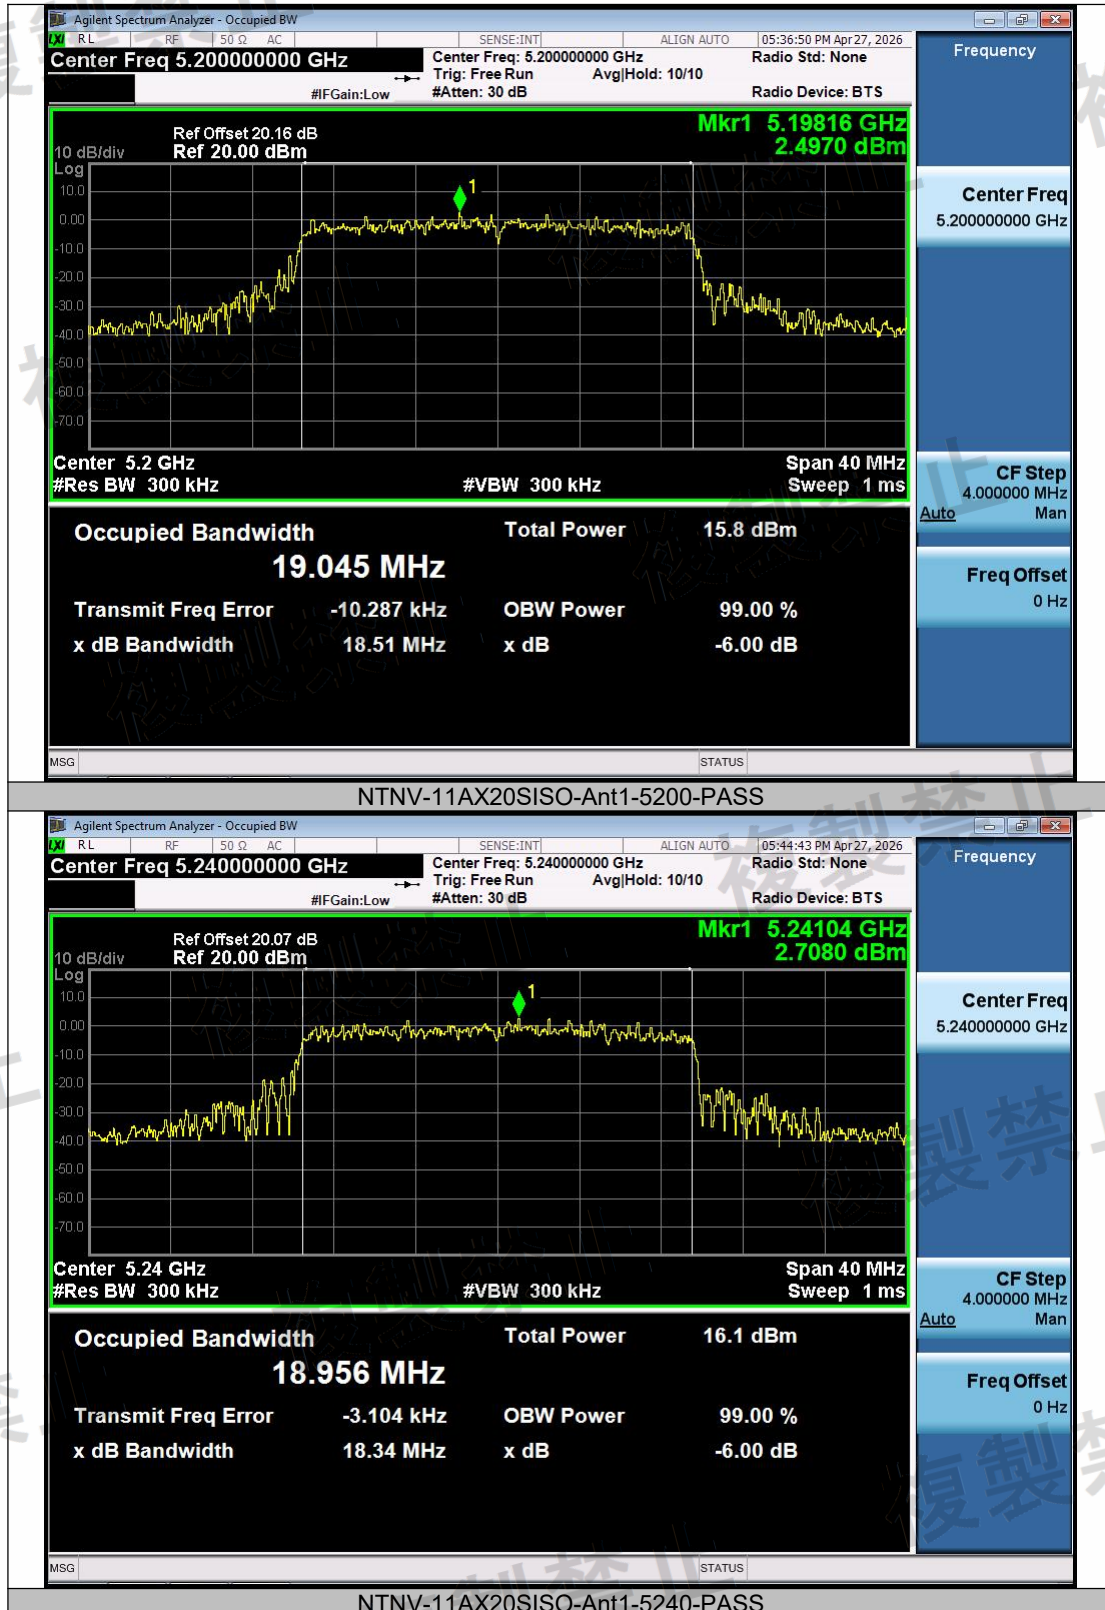


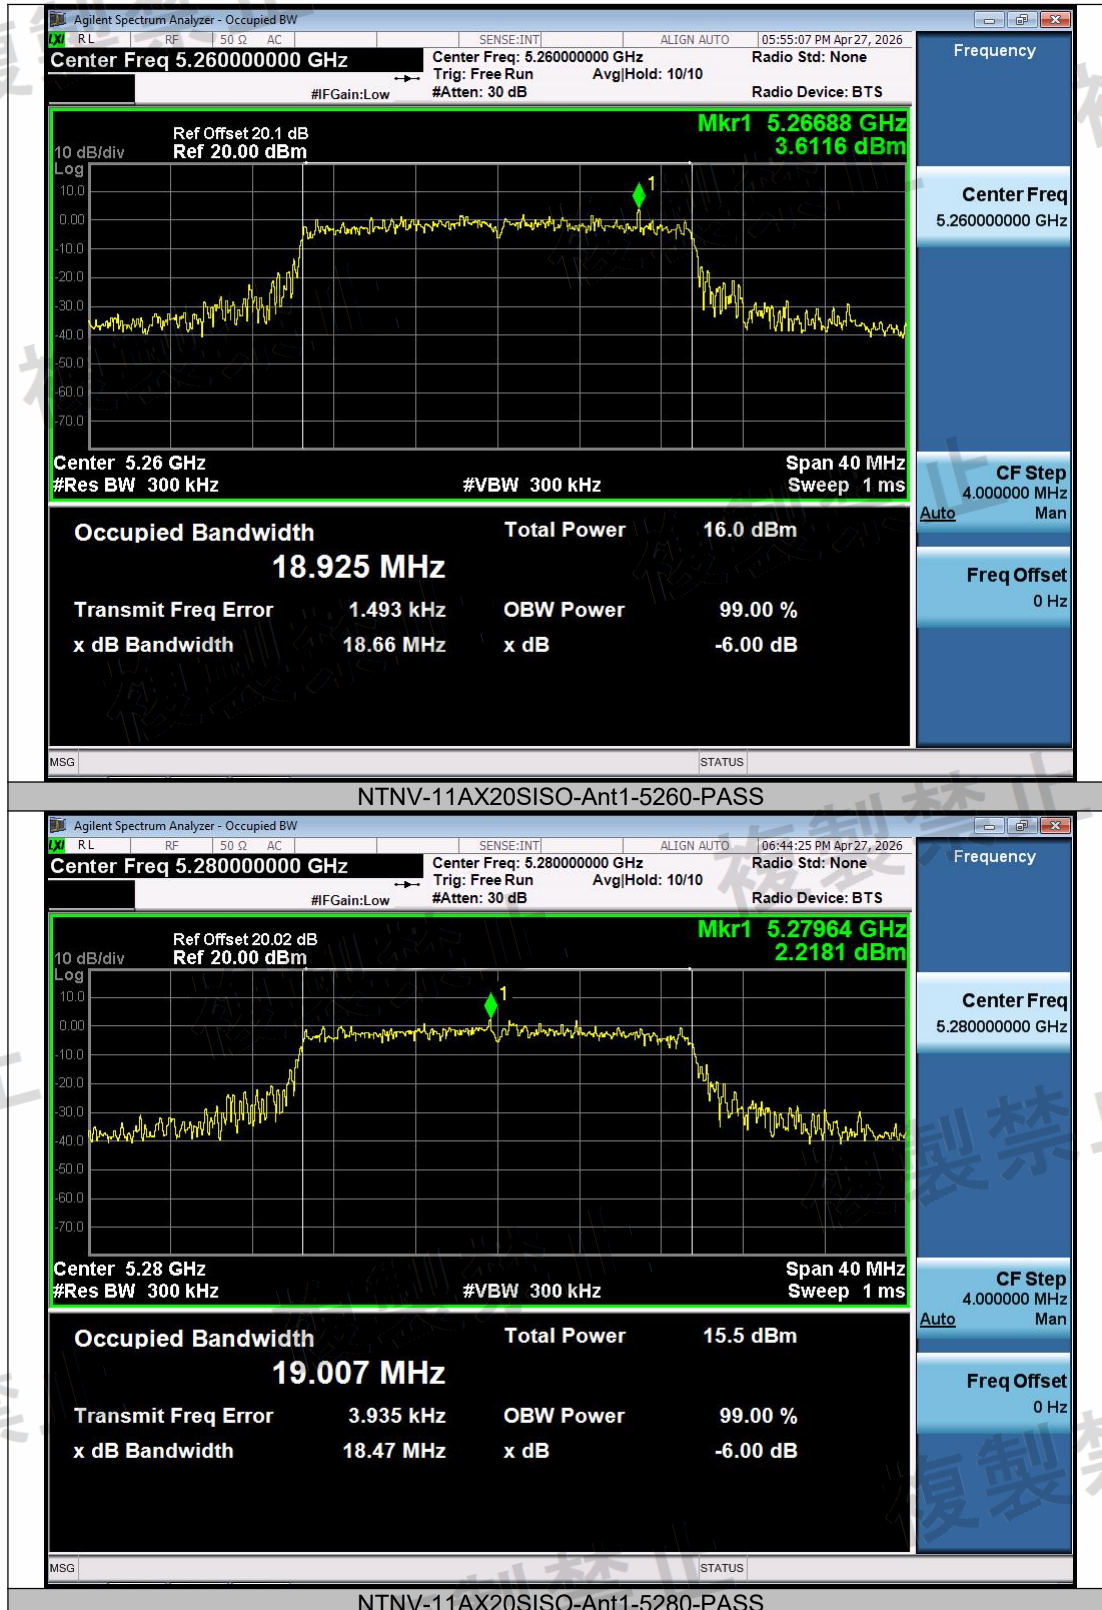


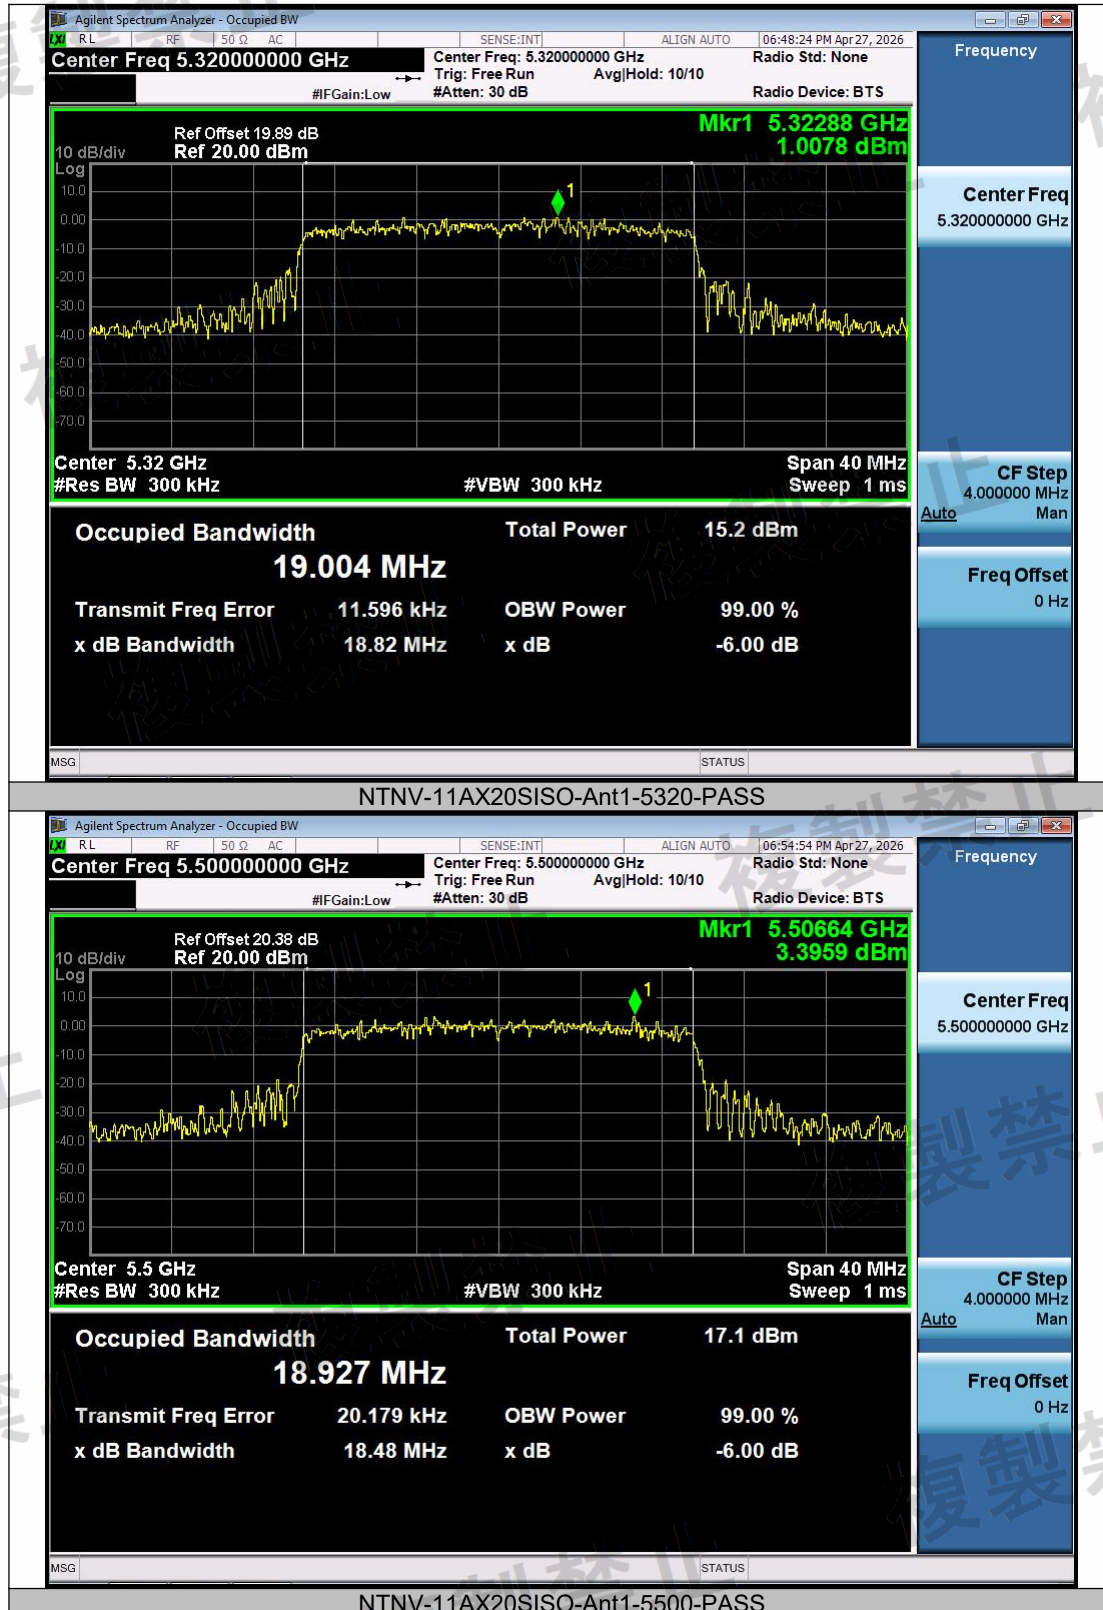

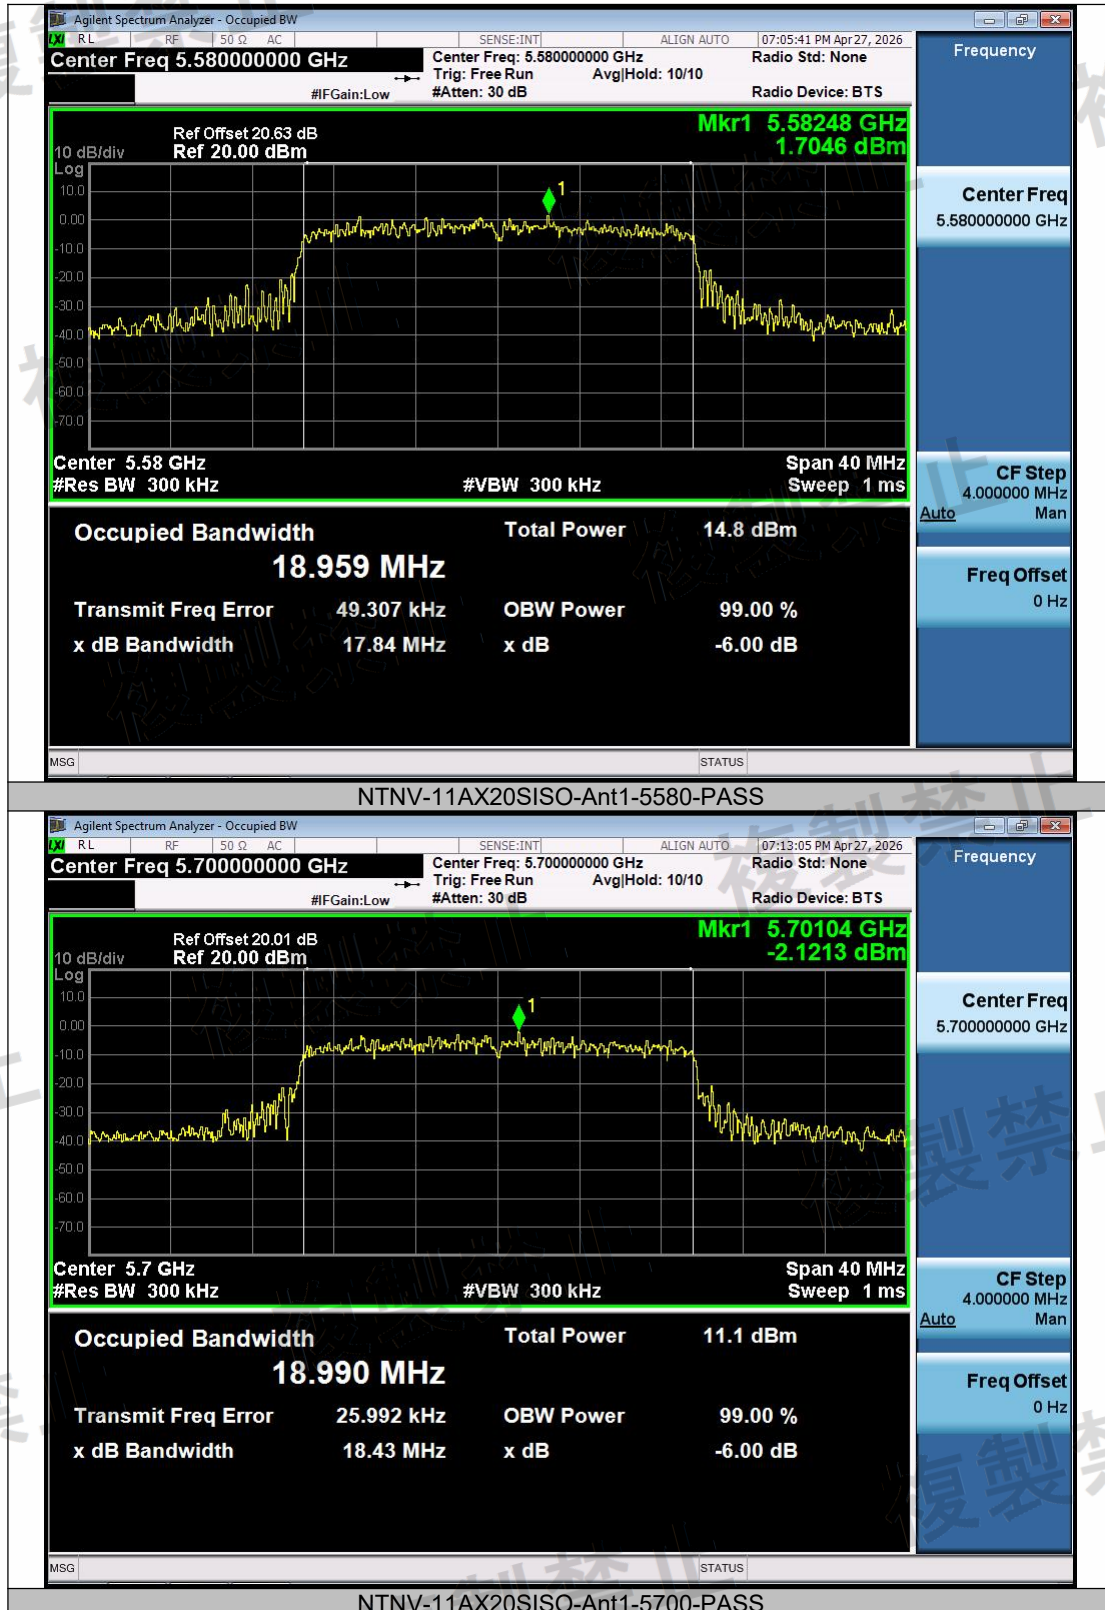

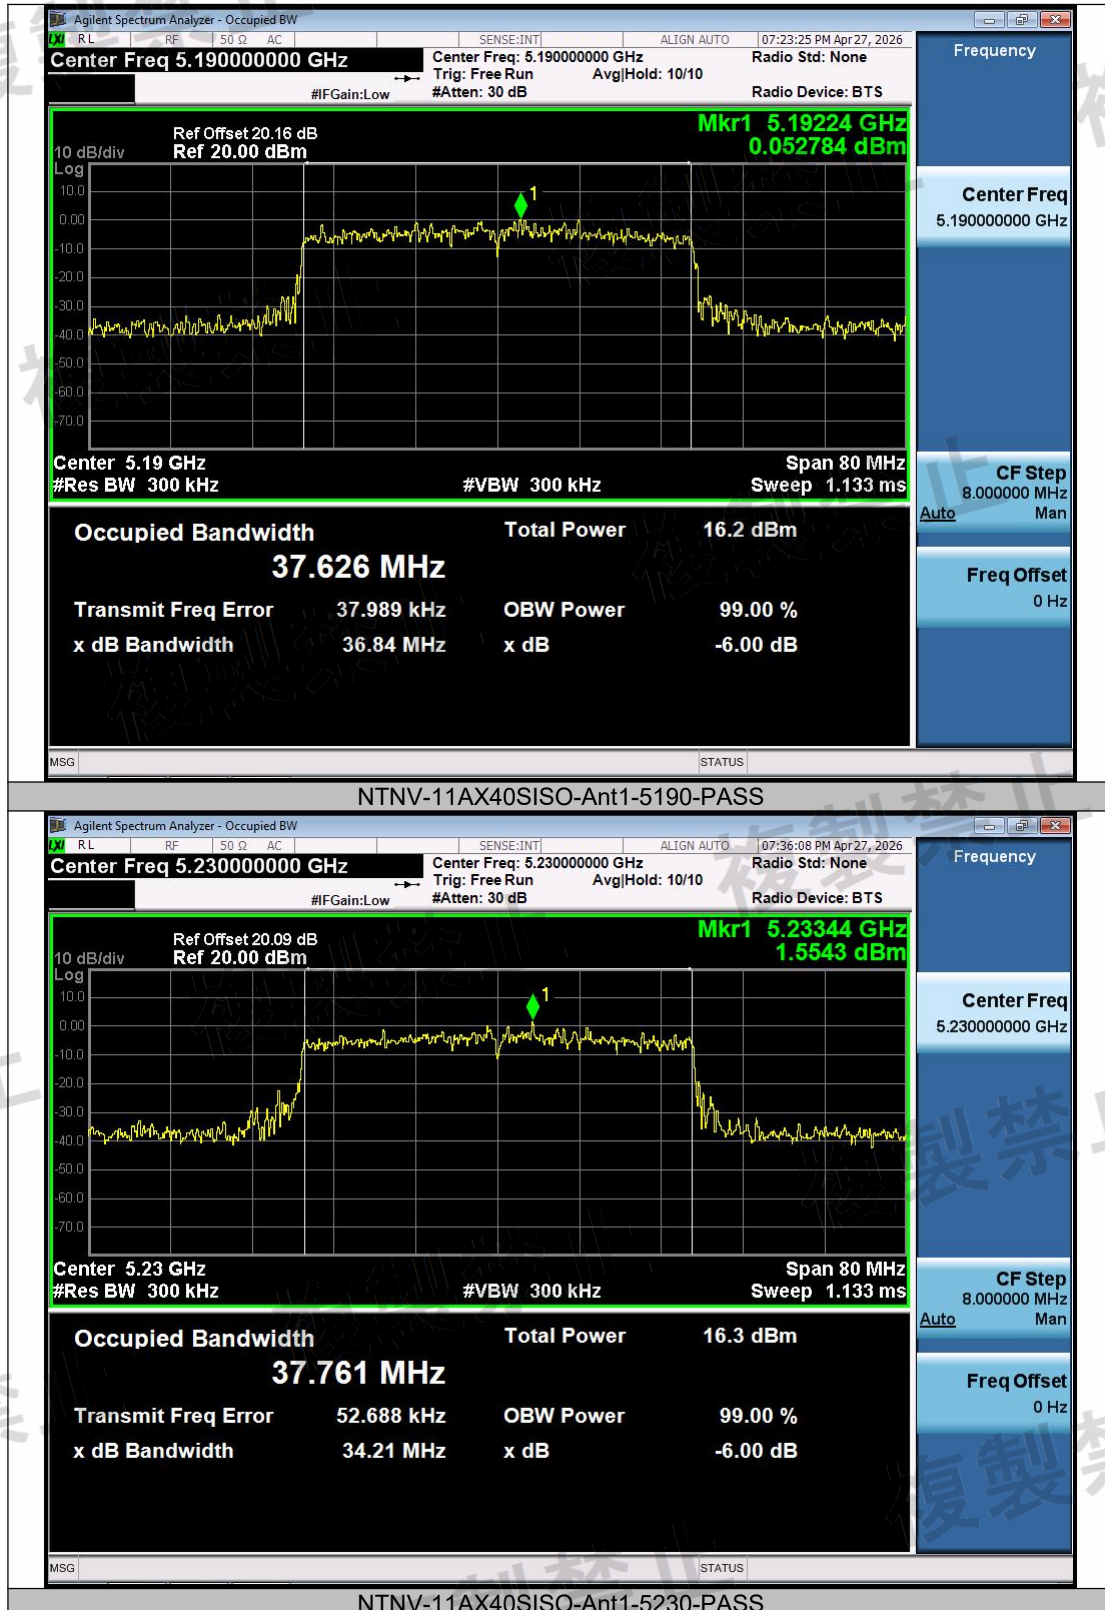

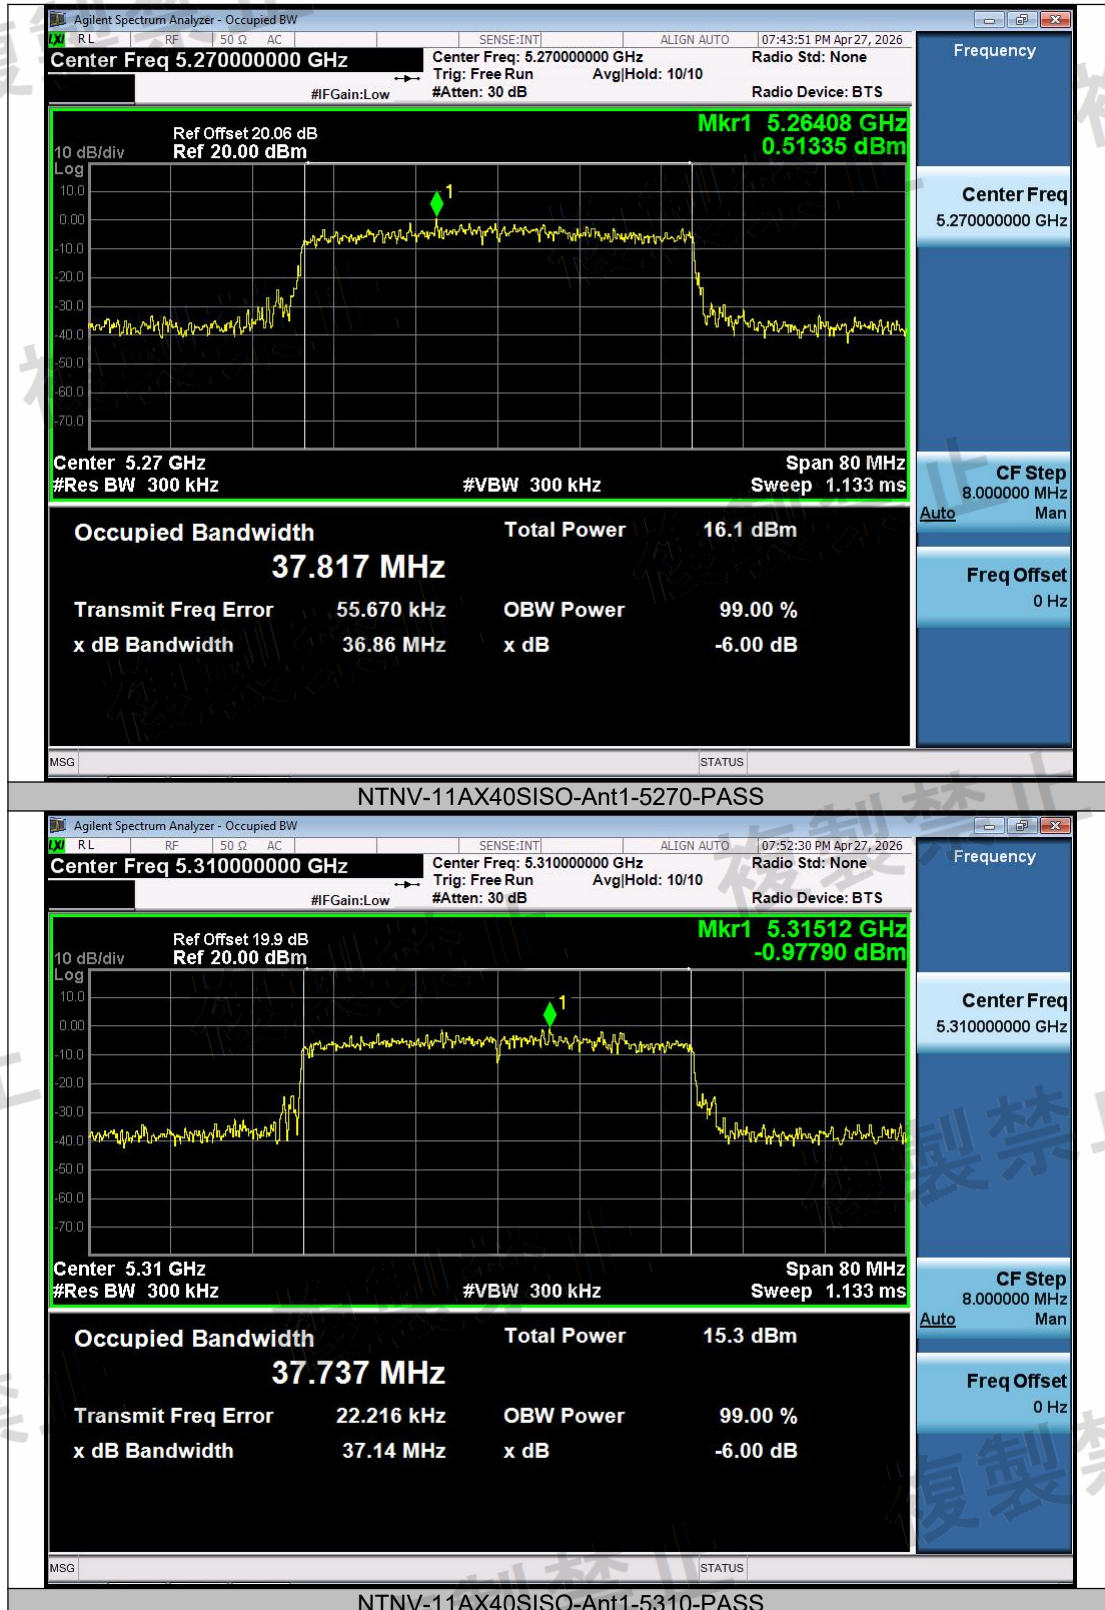

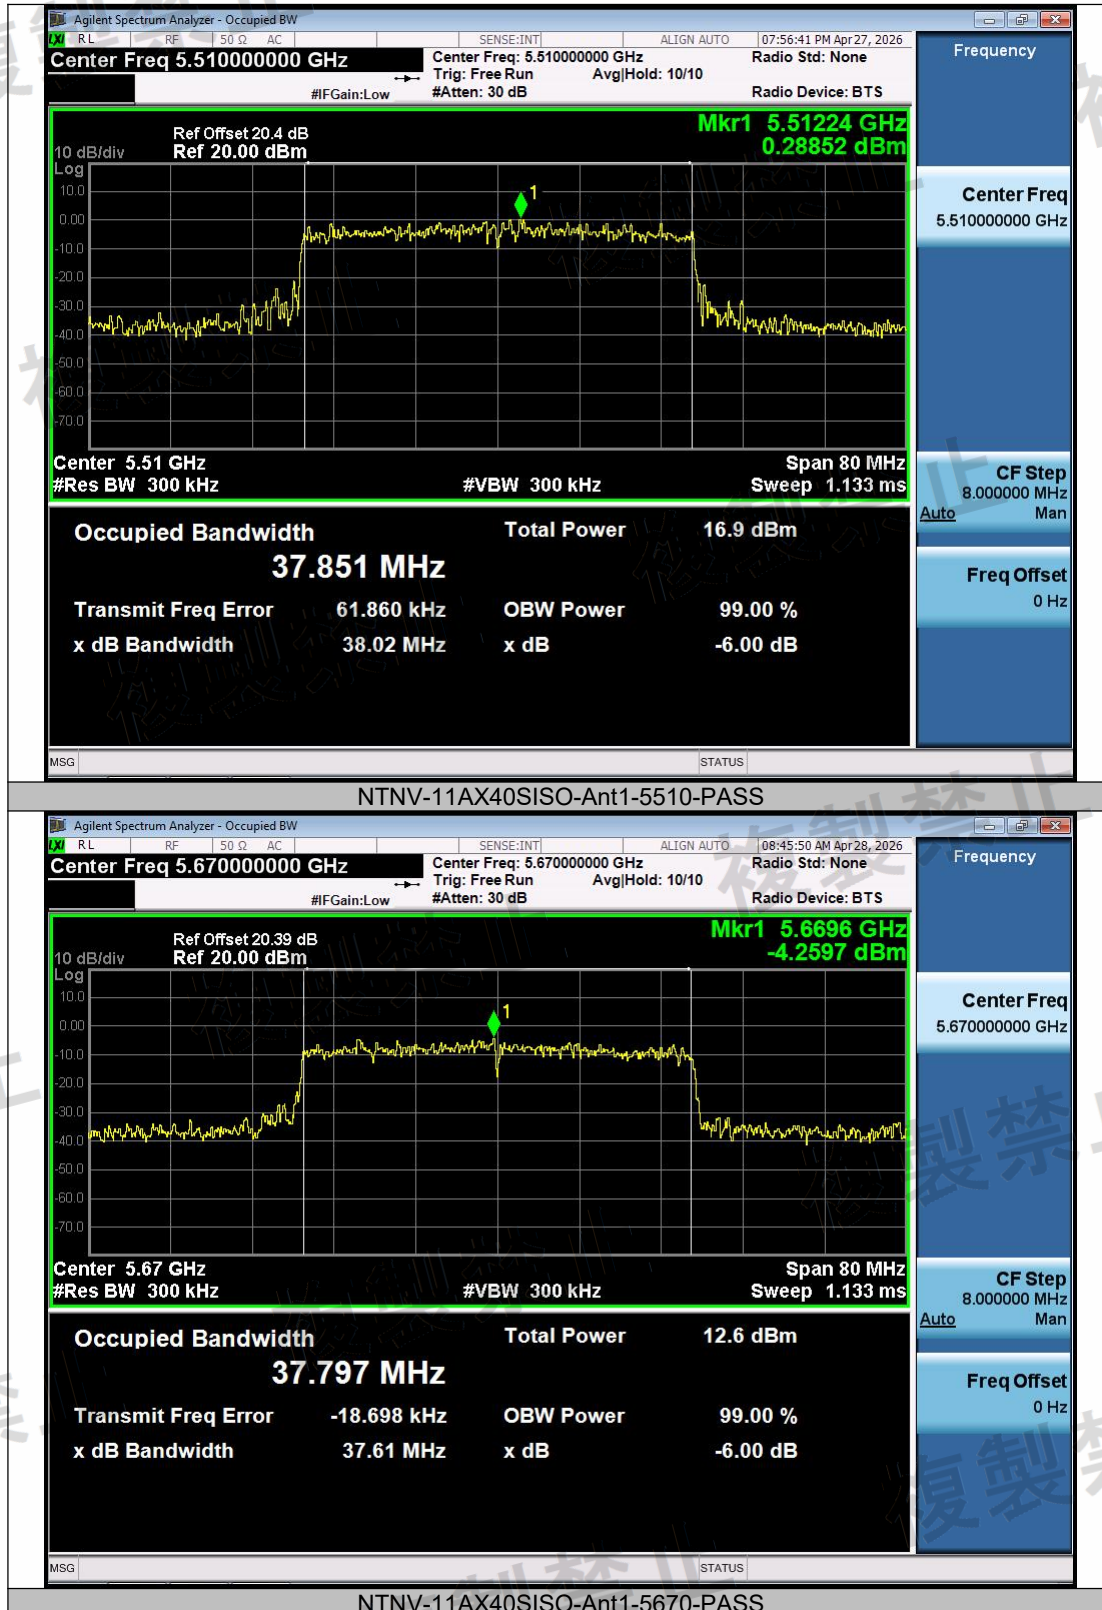

7.5. LEAK POWER OF ADJACENT CHANNELS

7.5.1. LIMIT

ARIB STD-T71, Clause 3.1.2 (9)

W52, W53 Band

below 18MHz bandwidth

In the frequency band of $\pm 9\text{MHz}$ from the frequency of the carrier wave 20MHz and 40MHz away, The average power shell be respectively 25dB and 40dB lower than the carrier wave power.

between 18MHz to 19MHz bandwidth

In the frequency band of $\pm 9.5\text{MHz}$ from the frequency of the carrier wave 20MHz and 40MHz away, The average power shell be respectively 25dB and 40dB lower than the carrier wave power.

approximately 40MHz bandwidth

In the frequency band of $\pm 19\text{MHz}$ from the frequency of the carrier wave 40MHz and 80MHz away, The average power shell be respectively 25dB and 40dB lower than the carrier wave power.

approximately 80MHz bandwidth

In the frequency band of $\pm 39\text{MHz}$ from the frequency of the carrier wave 80MHz away, The average power shell be respectively 25dB lower than the carrier wave power.

7.5.2. Test Procedure

Test Method for Radio Equipment mentioned in Certification Regulations Article 2, Item 19-3-2

MIC Notice No.88 Annex45 Clause 7

7.5.3. Test Configuration

Temperature and Voltage Measurement (under normal and extreme test conditions)



Remarks:

The spectrum analyzer could be connected to a monopole antenna or directly connected to the EUT, if the EUT has already employing an antenna connector.


7.5.4. TEST RESULT

TestCondition	TestMode	Antenna	Frequency[MHz]	Offset [MHz]	Result [dBc]	Limit [dBc]	Verdict
NTNV	11A	Ant1	5180	-40	-45.12	≤-40	PASS
NTNV	11A	Ant1	5180	-20	-30.64	≤-25	PASS
NTNV	11A	Ant1	5180	+20	-31.14	≤-25	PASS
NTNV	11A	Ant1	5180	+40	-45.03	≤-40	PASS
NTNV	11A	Ant1	5200	-40	-44.69	≤-40	PASS
NTNV	11A	Ant1	5200	-20	-30.69	≤-25	PASS
NTNV	11A	Ant1	5200	+20	-31.25	≤-25	PASS
NTNV	11A	Ant1	5200	+40	-44.73	≤-40	PASS
NTNV	11A	Ant1	5240	-40	-44.80	≤-40	PASS
NTNV	11A	Ant1	5240	-20	-30.68	≤-25	PASS
NTNV	11A	Ant1	5240	+20	-31.29	≤-25	PASS
NTNV	11A	Ant1	5240	+40	-44.79	≤-40	PASS
NTNV	11A	Ant1	5260	-40	-44.59	≤-40	PASS
NTNV	11A	Ant1	5260	-20	-30.88	≤-25	PASS
NTNV	11A	Ant1	5260	+20	-30.90	≤-25	PASS
NTNV	11A	Ant1	5260	+40	-44.56	≤-40	PASS
NTNV	11A	Ant1	5280	-40	-44.50	≤-40	PASS
NTNV	11A	Ant1	5280	-20	-30.48	≤-25	PASS
NTNV	11A	Ant1	5280	+20	-30.84	≤-25	PASS
NTNV	11A	Ant1	5280	+40	-44.52	≤-40	PASS
NTNV	11A	Ant1	5320	-40	-44.78	≤-40	PASS
NTNV	11A	Ant1	5320	-20	-30.37	≤-25	PASS
NTNV	11A	Ant1	5320	+20	-31.05	≤-25	PASS
NTNV	11A	Ant1	5320	+40	-44.71	≤-40	PASS
NTNV	11A	Ant1	5500	-40	-45.40	≤-40	PASS
NTNV	11A	Ant1	5500	-20	-30.56	≤-25	PASS
NTNV	11A	Ant1	5500	+20	-30.76	≤-25	PASS
NTNV	11A	Ant1	5500	+40	-45.34	≤-40	PASS
NTNV	11A	Ant1	5580	-40	-43.10	≤-40	PASS
NTNV	11A	Ant1	5580	-20	-30.09	≤-25	PASS
NTNV	11A	Ant1	5580	+20	-31.66	≤-25	PASS
NTNV	11A	Ant1	5580	+40	-43.12	≤-40	PASS
NTNV	11A	Ant1	5700	-40	-41.23	≤-40	PASS
NTNV	11A	Ant1	5700	-20	-30.58	≤-25	PASS
NTNV	11A	Ant1	5700	+20	-31.53	≤-25	PASS
NTNV	11A	Ant1	5700	+40	-41.12	≤-40	PASS
NTNV	11N20SISO	Ant1	5180	-40	-44.70	≤-40	PASS
NTNV	11N20SISO	Ant1	5180	-20	-30.04	≤-25	PASS
NTNV	11N20SISO	Ant1	5180	+20	-29.71	≤-25	PASS
NTNV	11N20SISO	Ant1	5180	+40	-44.67	≤-40	PASS
NTNV	11N20SISO	Ant1	5200	-40	-44.63	≤-40	PASS
NTNV	11N20SISO	Ant1	5200	-20	-29.65	≤-25	PASS
NTNV	11N20SISO	Ant1	5200	+20	-29.64	≤-25	PASS
NTNV	11N20SISO	Ant1	5200	+40	-44.70	≤-40	PASS
NTNV	11N20SISO	Ant1	5240	-40	-45.39	≤-40	PASS
NTNV	11N20SISO	Ant1	5240	-20	-29.49	≤-25	PASS
NTNV	11N20SISO	Ant1	5240	+20	-30.03	≤-25	PASS
NTNV	11N20SISO	Ant1	5240	+40	-45.40	≤-40	PASS
NTNV	11N20SISO	Ant1	5260	-40	-44.48	≤-40	PASS
NTNV	11N20SISO	Ant1	5260	-20	-29.46	≤-25	PASS
NTNV	11N20SISO	Ant1	5260	+20	-29.88	≤-25	PASS
NTNV	11N20SISO	Ant1	5260	+40	-44.65	≤-40	PASS
NTNV	11N20SISO	Ant1	5280	-40	-43.86	≤-40	PASS
NTNV	11N20SISO	Ant1	5280	-20	-29.37	≤-25	PASS
NTNV	11N20SISO	Ant1	5280	+20	-29.83	≤-25	PASS
NTNV	11N20SISO	Ant1	5280	+40	-44.25	≤-40	PASS
NTNV	11N20SISO	Ant1	5320	-40	-43.61	≤-40	PASS
NTNV	11N20SISO	Ant1	5320	-20	-29.52	≤-25	PASS


NTNV	11N20SISO	Ant1	5320	+20	-29.45	≤-25	PASS
NTNV	11N20SISO	Ant1	5320	+40	-43.44	≤-40	PASS
NTNV	11N20SISO	Ant1	5500	-40	-44.65	≤-40	PASS
NTNV	11N20SISO	Ant1	5500	-20	-29.60	≤-25	PASS
NTNV	11N20SISO	Ant1	5500	+20	-29.82	≤-25	PASS
NTNV	11N20SISO	Ant1	5500	+40	-44.73	≤-40	PASS
NTNV	11N20SISO	Ant1	5580	-40	-42.80	≤-40	PASS
NTNV	11N20SISO	Ant1	5580	-20	-29.48	≤-25	PASS
NTNV	11N20SISO	Ant1	5580	+20	-30.45	≤-25	PASS
NTNV	11N20SISO	Ant1	5580	+40	-42.80	≤-40	PASS
NTNV	11N20SISO	Ant1	5700	-40	-40.42	≤-40	PASS
NTNV	11N20SISO	Ant1	5700	-20	-29.48	≤-25	PASS
NTNV	11N20SISO	Ant1	5700	+20	-30.30	≤-25	PASS
NTNV	11N20SISO	Ant1	5700	+40	-40.49	≤-40	PASS
NTNV	11N40SISO	Ant1	5190	-80	-41.39	≤-40	PASS
NTNV	11N40SISO	Ant1	5190	-40	-32.11	≤-25	PASS
NTNV	11N40SISO	Ant1	5190	+40	-31.86	≤-25	PASS
NTNV	11N40SISO	Ant1	5190	+80	-41.14	≤-40	PASS
NTNV	11N40SISO	Ant1	5230	-80	-41.39	≤-40	PASS
NTNV	11N40SISO	Ant1	5230	-40	-32.37	≤-25	PASS
NTNV	11N40SISO	Ant1	5230	+40	-32.39	≤-25	PASS
NTNV	11N40SISO	Ant1	5230	+80	-41.29	≤-40	PASS
NTNV	11N40SISO	Ant1	5270	-80	-41.22	≤-40	PASS
NTNV	11N40SISO	Ant1	5270	-40	-31.72	≤-25	PASS
NTNV	11N40SISO	Ant1	5270	+40	-31.64	≤-25	PASS
NTNV	11N40SISO	Ant1	5270	+80	-41.13	≤-40	PASS
NTNV	11N40SISO	Ant1	5310	-80	-40.76	≤-40	PASS
NTNV	11N40SISO	Ant1	5310	-40	-31.46	≤-25	PASS
NTNV	11N40SISO	Ant1	5310	+40	-31.67	≤-25	PASS
NTNV	11N40SISO	Ant1	5310	+80	-40.72	≤-40	PASS
NTNV	11N40SISO	Ant1	5510	-80	-41.76	≤-40	PASS
NTNV	11N40SISO	Ant1	5510	-40	-31.40	≤-25	PASS
NTNV	11N40SISO	Ant1	5510	+40	-31.45	≤-25	PASS
NTNV	11N40SISO	Ant1	5510	+80	-41.69	≤-40	PASS
NTNV	11N40SISO	Ant1	5670	-80	-41.18	≤-40	PASS
NTNV	11N40SISO	Ant1	5670	-40	-26.65	≤-25	PASS
NTNV	11N40SISO	Ant1	5670	+40	-27.63	≤-25	PASS
NTNV	11N40SISO	Ant1	5670	+80	-42.31	≤-40	PASS
NTNV	11AC20SISO	Ant1	5180	-40	-44.44	≤-40	PASS
NTNV	11AC20SISO	Ant1	5180	-20	-29.76	≤-25	PASS
NTNV	11AC20SISO	Ant1	5180	+20	-29.75	≤-25	PASS
NTNV	11AC20SISO	Ant1	5180	+40	-44.29	≤-40	PASS
NTNV	11AC20SISO	Ant1	5200	-40	-44.21	≤-40	PASS
NTNV	11AC20SISO	Ant1	5200	-20	-29.33	≤-25	PASS
NTNV	11AC20SISO	Ant1	5200	+20	-29.66	≤-25	PASS
NTNV	11AC20SISO	Ant1	5200	+40	-43.97	≤-40	PASS
NTNV	11AC20SISO	Ant1	5240	-40	-43.85	≤-40	PASS
NTNV	11AC20SISO	Ant1	5240	-20	-27.26	≤-25	PASS
NTNV	11AC20SISO	Ant1	5240	+20	-27.93	≤-25	PASS
NTNV	11AC20SISO	Ant1	5240	+40	-43.82	≤-40	PASS
NTNV	11AC20SISO	Ant1	5260	-40	-43.97	≤-40	PASS
NTNV	11AC20SISO	Ant1	5260	-20	-30.07	≤-25	PASS
NTNV	11AC20SISO	Ant1	5260	+20	-29.31	≤-25	PASS
NTNV	11AC20SISO	Ant1	5260	+40	-43.95	≤-40	PASS
NTNV	11AC20SISO	Ant1	5280	-40	-44.04	≤-40	PASS
NTNV	11AC20SISO	Ant1	5280	-20	-29.32	≤-25	PASS
NTNV	11AC20SISO	Ant1	5280	+20	-29.84	≤-25	PASS
NTNV	11AC20SISO	Ant1	5280	+40	-43.93	≤-40	PASS
NTNV	11AC20SISO	Ant1	5320	-40	-44.27	≤-40	PASS
NTNV	11AC20SISO	Ant1	5320	-20	-29.95	≤-25	PASS
NTNV	11AC20SISO	Ant1	5320	+20	-29.31	≤-25	PASS

NTNV	11AC20SISO	Ant1	5320	+40	-44.09	≤-40	PASS
NTNV	11AC20SISO	Ant1	5500	-40	-44.84	≤-40	PASS
NTNV	11AC20SISO	Ant1	5500	-20	-29.80	≤-25	PASS
NTNV	11AC20SISO	Ant1	5500	+20	-29.81	≤-25	PASS
NTNV	11AC20SISO	Ant1	5500	+40	-44.38	≤-40	PASS
NTNV	11AC20SISO	Ant1	5580	-40	-42.63	≤-40	PASS
NTNV	11AC20SISO	Ant1	5580	-20	-29.27	≤-25	PASS
NTNV	11AC20SISO	Ant1	5580	+20	-30.38	≤-25	PASS
NTNV	11AC20SISO	Ant1	5580	+40	-42.48	≤-40	PASS
NTNV	11AC20SISO	Ant1	5700	-40	-40.09	≤-40	PASS
NTNV	11AC20SISO	Ant1	5700	-20	-29.54	≤-25	PASS
NTNV	11AC20SISO	Ant1	5700	+20	-30.48	≤-25	PASS
NTNV	11AC20SISO	Ant1	5700	+40	-40.22	≤-40	PASS
NTNV	11AC40SISO	Ant1	5190	-80	-41.55	≤-40	PASS
NTNV	11AC40SISO	Ant1	5190	-40	-32.27	≤-25	PASS
NTNV	11AC40SISO	Ant1	5190	+40	-32.15	≤-25	PASS
NTNV	11AC40SISO	Ant1	5190	+80	-41.10	≤-40	PASS
NTNV	11AC40SISO	Ant1	5230	-80	-41.14	≤-40	PASS
NTNV	11AC40SISO	Ant1	5230	-40	-31.79	≤-25	PASS
NTNV	11AC40SISO	Ant1	5230	+40	-32.15	≤-25	PASS
NTNV	11AC40SISO	Ant1	5230	+80	-40.96	≤-40	PASS
NTNV	11AC40SISO	Ant1	5270	-80	-41.64	≤-40	PASS
NTNV	11AC40SISO	Ant1	5270	-40	-31.53	≤-25	PASS
NTNV	11AC40SISO	Ant1	5270	+40	-32.06	≤-25	PASS
NTNV	11AC40SISO	Ant1	5270	+80	-41.45	≤-40	PASS
NTNV	11AC40SISO	Ant1	5310	-80	-40.76	≤-40	PASS
NTNV	11AC40SISO	Ant1	5310	-40	-31.96	≤-25	PASS
NTNV	11AC40SISO	Ant1	5310	+40	-31.16	≤-25	PASS
NTNV	11AC40SISO	Ant1	5310	+80	-40.79	≤-40	PASS
NTNV	11AC40SISO	Ant1	5510	-80	-41.76	≤-40	PASS
NTNV	11AC40SISO	Ant1	5510	-40	-31.50	≤-25	PASS
NTNV	11AC40SISO	Ant1	5510	+40	-31.75	≤-25	PASS
NTNV	11AC40SISO	Ant1	5510	+80	-41.57	≤-40	PASS
NTNV	11AC40SISO	Ant1	5670	-80	-41.08	≤-40	PASS
NTNV	11AC40SISO	Ant1	5670	-40	-29.34	≤-25	PASS
NTNV	11AC40SISO	Ant1	5670	+40	-30.27	≤-25	PASS
NTNV	11AC40SISO	Ant1	5670	+80	-41.14	≤-40	PASS
NTNV	11AX20SISO	Ant1	5180	-40	-45.14	≤-40	PASS
NTNV	11AX20SISO	Ant1	5180	-20	-27.70	≤-25	PASS
NTNV	11AX20SISO	Ant1	5180	+20	-27.45	≤-25	PASS
NTNV	11AX20SISO	Ant1	5180	+40	-44.94	≤-40	PASS
NTNV	11AX20SISO	Ant1	5200	-40	-44.94	≤-40	PASS
NTNV	11AX20SISO	Ant1	5200	-20	-27.14	≤-25	PASS
NTNV	11AX20SISO	Ant1	5200	+20	-27.04	≤-25	PASS
NTNV	11AX20SISO	Ant1	5200	+40	-44.67	≤-40	PASS
NTNV	11AX20SISO	Ant1	5240	-40	-45.03	≤-40	PASS
NTNV	11AX20SISO	Ant1	5240	-20	-27.42	≤-25	PASS
NTNV	11AX20SISO	Ant1	5240	+20	-27.50	≤-25	PASS
NTNV	11AX20SISO	Ant1	5240	+40	-45.05	≤-40	PASS
NTNV	11AX20SISO	Ant1	5260	-40	-44.54	≤-40	PASS
NTNV	11AX20SISO	Ant1	5260	-20	-27.38	≤-25	PASS
NTNV	11AX20SISO	Ant1	5260	+20	-27.56	≤-25	PASS
NTNV	11AX20SISO	Ant1	5260	+40	-44.54	≤-40	PASS
NTNV	11AX20SISO	Ant1	5280	-40	-44.54	≤-40	PASS
NTNV	11AX20SISO	Ant1	5280	-20	-27.35	≤-25	PASS
NTNV	11AX20SISO	Ant1	5280	+20	-27.92	≤-25	PASS
NTNV	11AX20SISO	Ant1	5280	+40	-44.61	≤-40	PASS
NTNV	11AX20SISO	Ant1	5320	-40	-44.40	≤-40	PASS
NTNV	11AX20SISO	Ant1	5320	-20	-27.29	≤-25	PASS
NTNV	11AX20SISO	Ant1	5320	+20	-27.18	≤-25	PASS
NTNV	11AX20SISO	Ant1	5320	+40	-44.32	≤-40	PASS

NTNV	11AX20SISO	Ant1	5500	-40	-45.61	≤-40	PASS
NTNV	11AX20SISO	Ant1	5500	-20	-27.76	≤-25	PASS
NTNV	11AX20SISO	Ant1	5500	+20	-27.01	≤-25	PASS
NTNV	11AX20SISO	Ant1	5500	+40	-44.98	≤-40	PASS
NTNV	11AX20SISO	Ant1	5580	-40	-43.47	≤-40	PASS
NTNV	11AX20SISO	Ant1	5580	-20	-27.54	≤-25	PASS
NTNV	11AX20SISO	Ant1	5580	+20	-27.45	≤-25	PASS
NTNV	11AX20SISO	Ant1	5580	+40	-43.59	≤-40	PASS
NTNV	11AX20SISO	Ant1	5700	-40	-41.08	≤-40	PASS
NTNV	11AX20SISO	Ant1	5700	-20	-27.19	≤-25	PASS
NTNV	11AX20SISO	Ant1	5700	+20	-27.36	≤-25	PASS
NTNV	11AX20SISO	Ant1	5700	+40	-41.26	≤-40	PASS
NTNV	11AX40SISO	Ant1	5190	-80	-42.46	≤-40	PASS
NTNV	11AX40SISO	Ant1	5190	-40	-32.47	≤-25	PASS
NTNV	11AX40SISO	Ant1	5190	+40	-31.95	≤-25	PASS
NTNV	11AX40SISO	Ant1	5190	+80	-42.16	≤-40	PASS
NTNV	11AX40SISO	Ant1	5230	-80	-42.39	≤-40	PASS
NTNV	11AX40SISO	Ant1	5230	-40	-32.47	≤-25	PASS
NTNV	11AX40SISO	Ant1	5230	+40	-32.25	≤-25	PASS
NTNV	11AX40SISO	Ant1	5230	+80	-42.10	≤-40	PASS
NTNV	11AX40SISO	Ant1	5270	-80	-42.48	≤-40	PASS
NTNV	11AX40SISO	Ant1	5270	-40	-34.00	≤-25	PASS
NTNV	11AX40SISO	Ant1	5270	+40	-31.91	≤-25	PASS
NTNV	11AX40SISO	Ant1	5270	+80	-42.09	≤-40	PASS
NTNV	11AX40SISO	Ant1	5310	-80	-41.66	≤-40	PASS
NTNV	11AX40SISO	Ant1	5310	-40	-32.13	≤-25	PASS
NTNV	11AX40SISO	Ant1	5310	+40	-31.57	≤-25	PASS
NTNV	11AX40SISO	Ant1	5310	+80	-41.78	≤-40	PASS
NTNV	11AX40SISO	Ant1	5510	-80	-42.82	≤-40	PASS
NTNV	11AX40SISO	Ant1	5510	-40	-32.17	≤-25	PASS
NTNV	11AX40SISO	Ant1	5510	+40	-32.74	≤-25	PASS
NTNV	11AX40SISO	Ant1	5510	+80	-42.70	≤-40	PASS
NTNV	11AX40SISO	Ant1	5670	-80	-41.20	≤-40	PASS
NTNV	11AX40SISO	Ant1	5670	-40	-30.91	≤-25	PASS
NTNV	11AX40SISO	Ant1	5670	+40	-31.55	≤-25	PASS
NTNV	11AX40SISO	Ant1	5670	+80	-41.47	≤-40	PASS

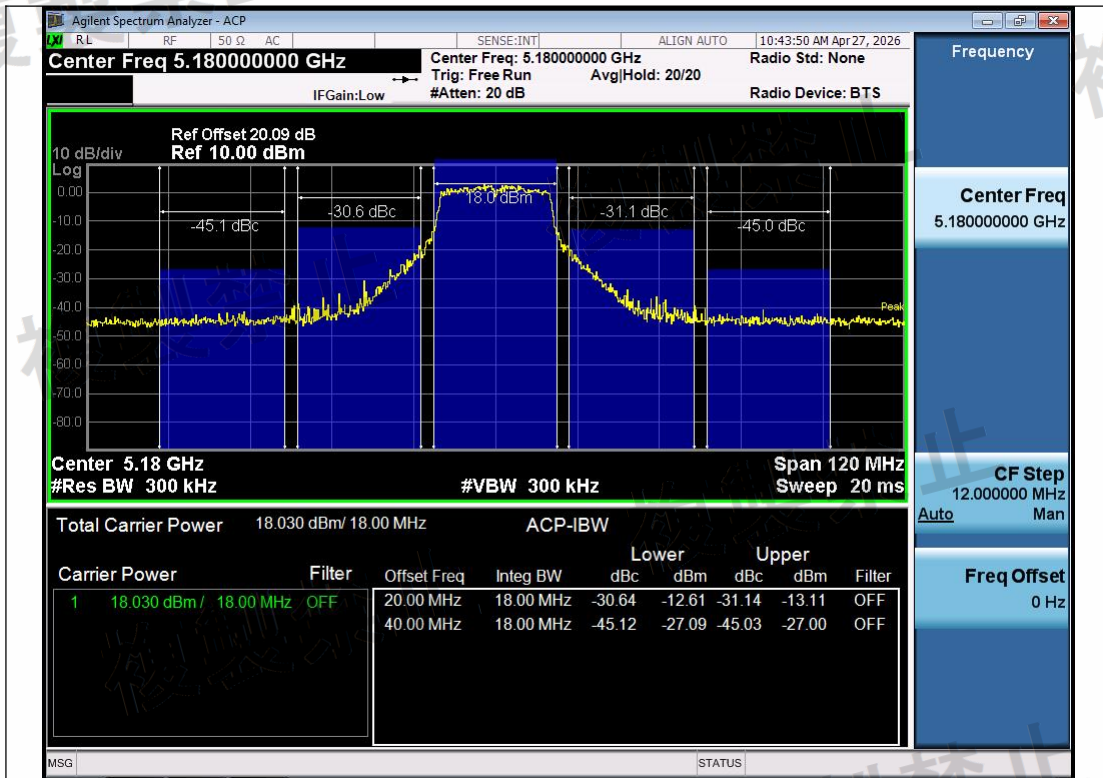

NTNV-11A-Ant1-5180-PASS

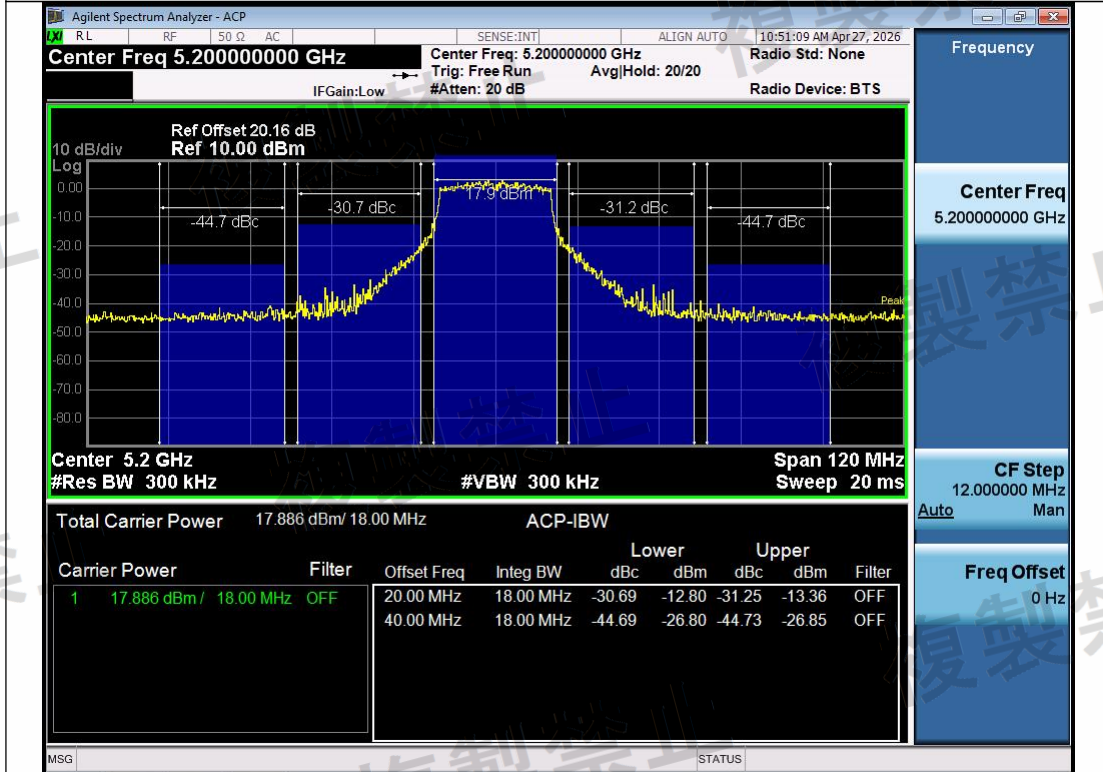

NTNV-11A-Ant1-5200-PASS

