


Site: AC1	Time: 2020/04/23 - 17:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 + 80 at Channel 5210 + 5290MHz with OAW-AP1362 (CDD Mode)	

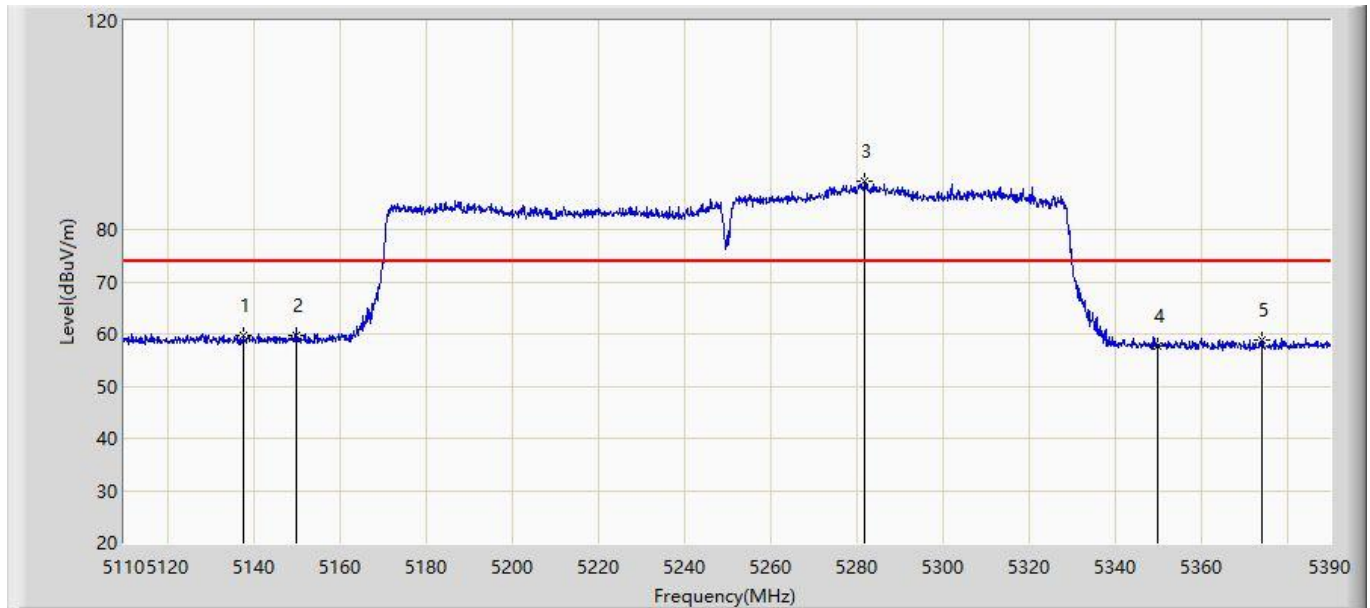


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor	Type
1			5137.860	59.632	55.994	-14.368	74.000	3.639	PK
2			5150.000	59.672	56.026	-14.328	74.000	3.646	PK
3		*	5281.920	89.305	85.575	15.305	74.000	3.731	PK
4			5350.000	57.681	53.907	-16.319	74.000	3.774	PK
5			5374.320	58.904	55.114	-15.096	74.000	3.790	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 17:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 + 80 at Channel 5210 + 5290MHz with OAW-AP1362 (CDD Mode)	

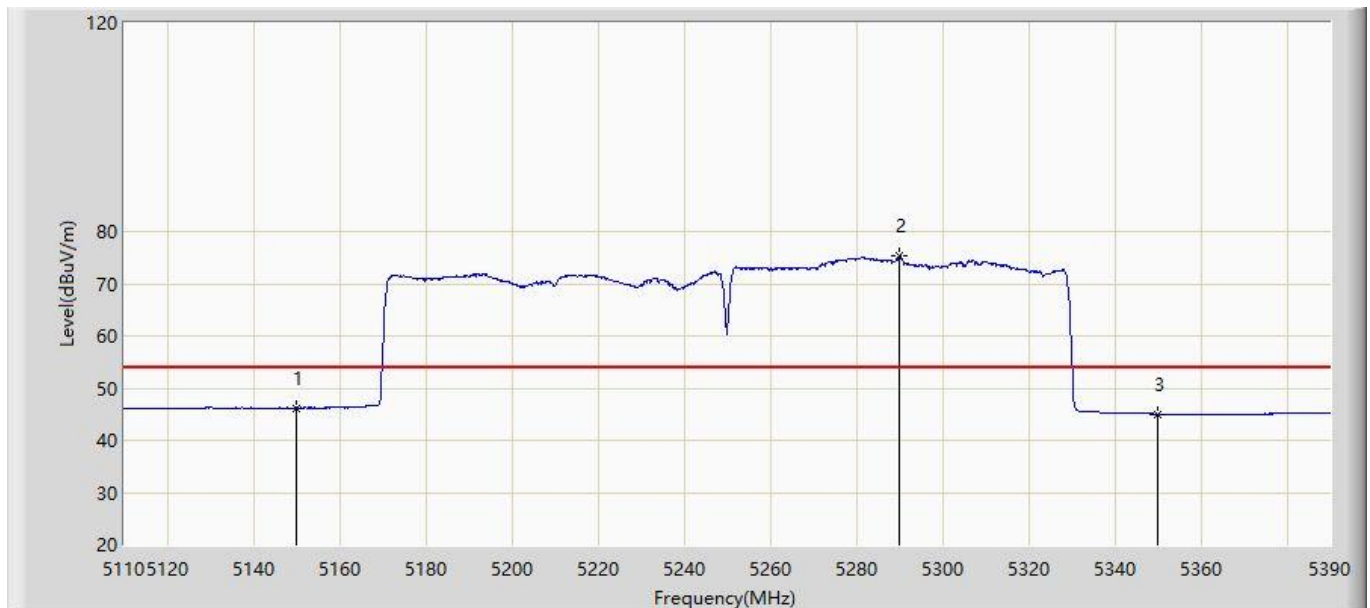


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	46.231	42.585	-7.769	54.000	3.646	AV
2		*	5289.900	75.332	71.597	21.332	54.000	3.735	AV
3			5350.000	45.024	41.250	-8.976	54.000	3.774	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 17:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 + 80 at Channel 5530 + 5610MHz with OAW-AP1362 (CDD Mode)	

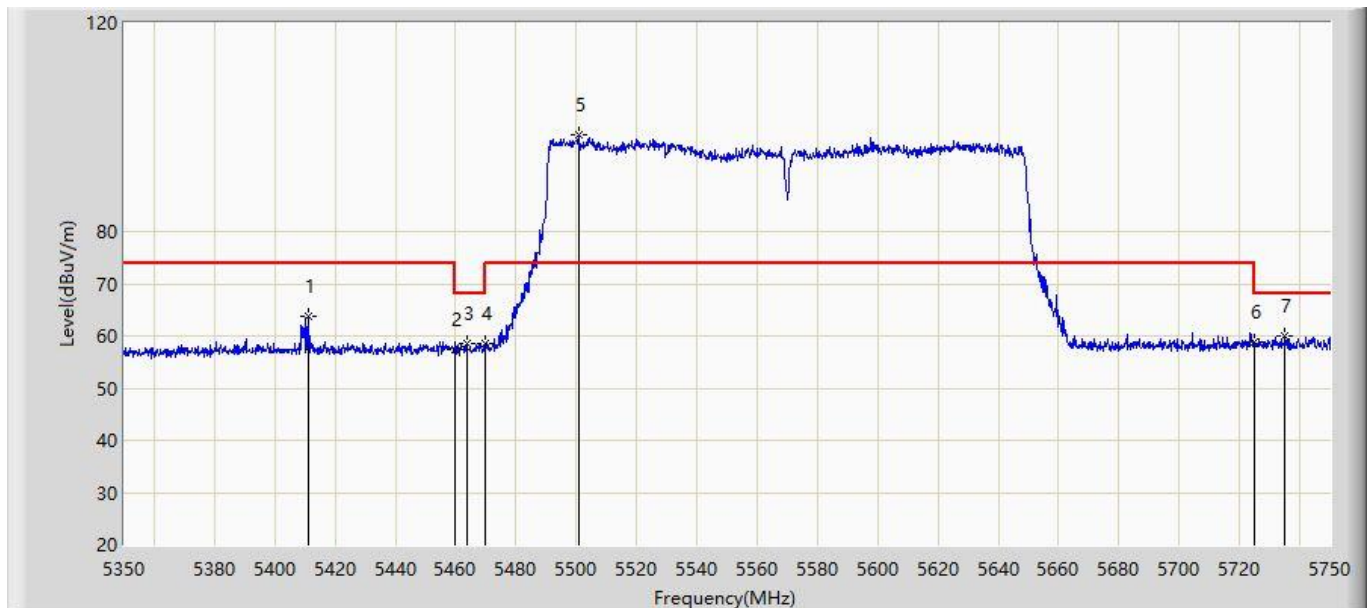


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor	Type
1			5411.200	63.721	59.908	-10.279	74.000	3.813	PK
2			5460.000	57.429	53.585	-16.571	74.000	3.844	PK
3			5463.800	58.686	54.840	-9.514	68.200	3.846	PK
4			5470.000	58.654	54.803	-9.546	68.200	3.850	PK
5		*	5500.800	98.479	94.596	24.479	74.000	3.883	PK
6			5725.000	58.769	54.035	-9.431	68.200	4.734	PK
7			5735.200	60.025	55.252	-8.175	68.200	4.772	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 17:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 + 80 at Channel 5530 + 5610MHz with OAW-AP1362 (CDD Mode)	

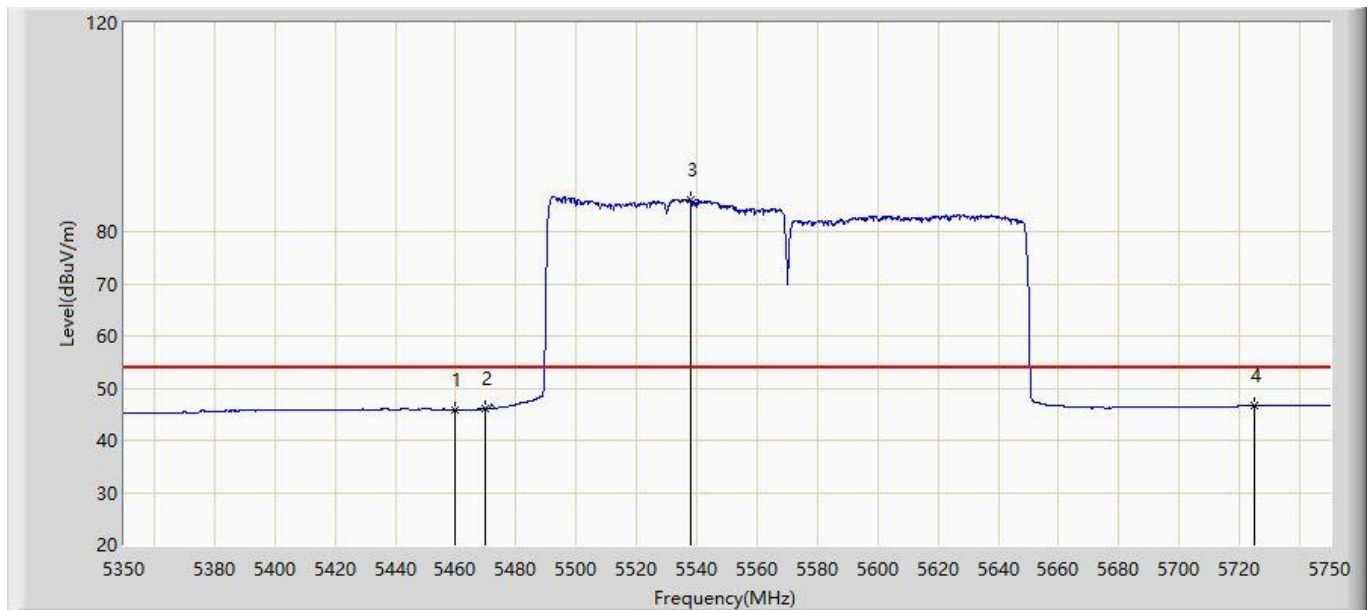


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	45.814	41.970	-8.186	54.000	3.844	AV
2			5470.000	45.991	42.140	-8.009	54.000	3.850	AV
3		*	5538.200	86.159	82.142	32.159	54.000	4.017	AV
4			5725.000	46.697	41.963	-7.303	54.000	4.734	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 17:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 + 80 at Channel 5530 + 5610MHz with OAW-AP1362 (CDD Mode)	

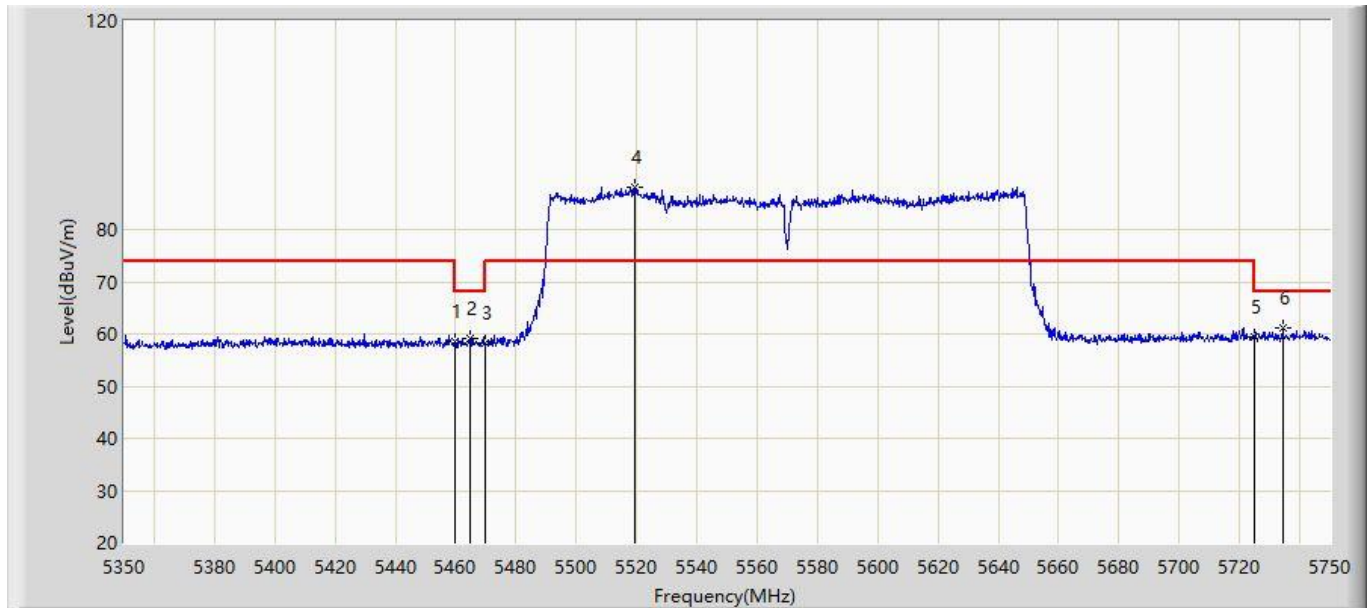


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	58.413	54.569	-15.587	74.000	3.844	PK
2			5464.600	59.021	55.174	-9.179	68.200	3.847	PK
3			5470.000	58.372	54.521	-9.828	68.200	3.850	PK
4		*	5519.200	88.184	84.240	14.184	74.000	3.944	PK
5			5725.000	59.525	54.791	-8.675	68.200	4.734	PK
6			5734.400	61.152	56.382	-7.048	68.200	4.770	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/23 - 17:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11ax-HE80 + 80 at Channel 5530 + 5610MHz with OAW-AP1362 (CDD Mode)	

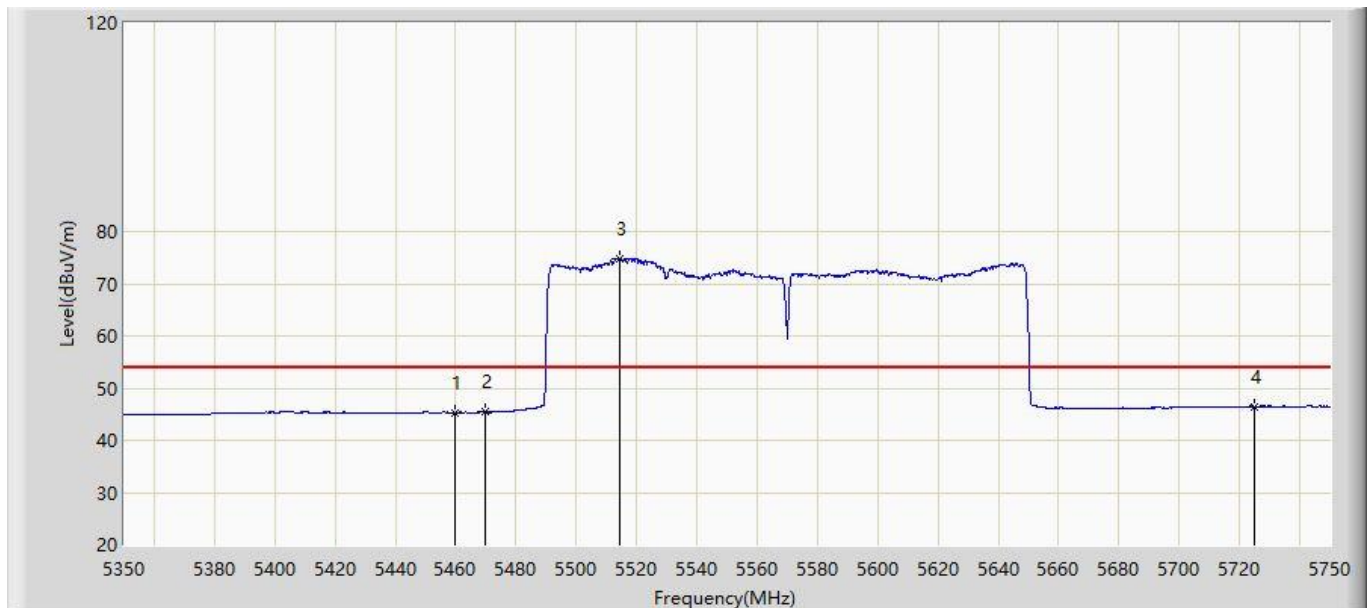

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	45.296	41.452	-8.704	54.000	3.844	AV
2			5470.000	45.368	41.517	-8.632	54.000	3.850	AV
3		*	5514.200	74.837	70.912	20.837	54.000	3.925	AV
4			5725.000	46.506	41.772	-7.494	54.000	4.734	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

5.8. 不必要之發射

5.8.1. 適用標準

依據國家通訊傳播委員會低功率射頻電機技術規範之第 4.7.3 節：

在 5.725 GHz~5.850 GHz 的頻段操作之發射器：所有頻帶邊緣向外 5 MHz 內頻率之發射，有效等向輻射功率(EIRP) ≤ 27 dBm/MHz~15.6 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣向外 5 MHz~25 MHz，有效等向輻射功率(EIRP) ≤ 15.6 dBm/MHz~10 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣外 25 MHz~75 MHz，有效等向輻射功率(EIRP) ≤ 10 dBm/MHz~-27 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣外 ≥ 75 MHz 的頻率之發射，有效等向輻射功率(EIRP) ≤ -27 dBm/MHz；

測量不必要發射時，應使用之最低解析頻寬為 1 MHz。必要時，於頻帶邊緣附近可使用小於 1 MHz 之解析頻寬，並以補償方式計算其總值。

當測量不必要發射之限制值時，應將待測物的載波頻率調整到儘可能接近設備設計所允許的上、下頻帶邊緣。

在 1 GHz 以下不必要之發射，應符合 2.8 之規定，任何使用市電為供應電源之設備亦須符合 2.3 之電源線傳導限制值。


不必要發射頻率屬 2.7 規定頻段者，應符合 2.8 之規定。

5.8.2. 量測方法


低頻待測物置於高 80 公分之非導體桌面（落地型產品置於地上），高頻待測物置於高 150 公分之非導體桌面，受測物與配件設備之電源線無須束綁，桌面上受測設備的所有電源線由桌子的後緣垂下沿旋轉桌表面接至交流插座。落地型設備的交流電源線可以方便的型態走線。桌面可 360 度旋轉，接收天線置於距待測物 3m 距離，高度可在 1 至 4 公尺間變動，以量測待測物之最大輻射電場強度。接收天線並應於水準及垂直極化方向各量測一次。(待測物擺設方式根據 ANSI C63.10-2013 版本，待測物放置桌中心，1G 以下擺設高度為 80cm/1G 以上擺設高度為 150cm)

5.8.3. 測試架構圖

Below 1GHz Test Setup:

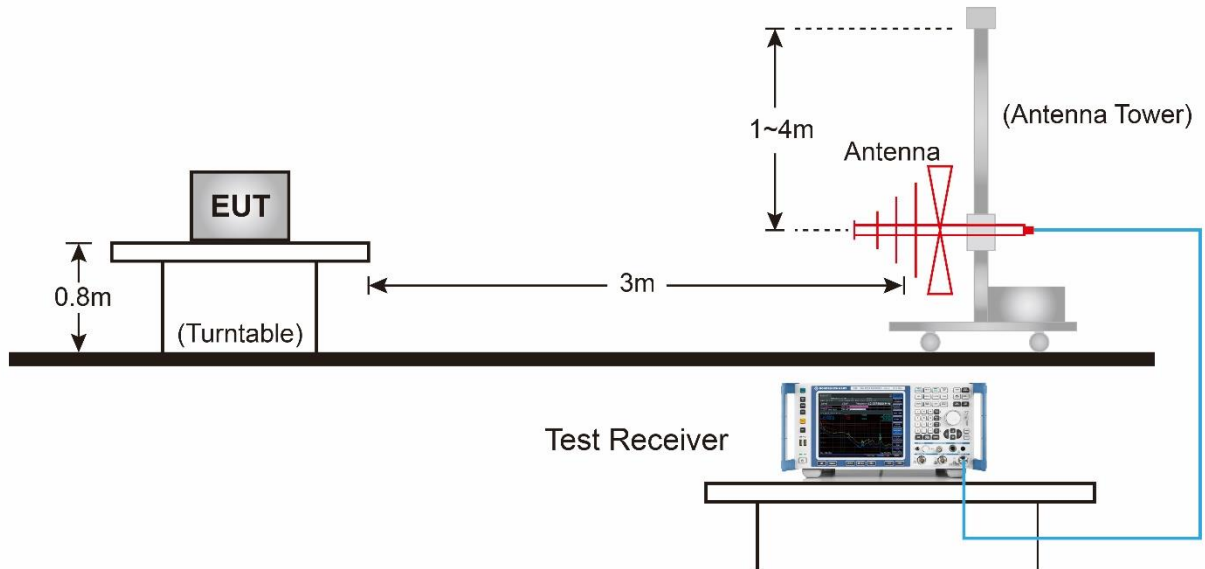

Above 1GHz Test Setup:

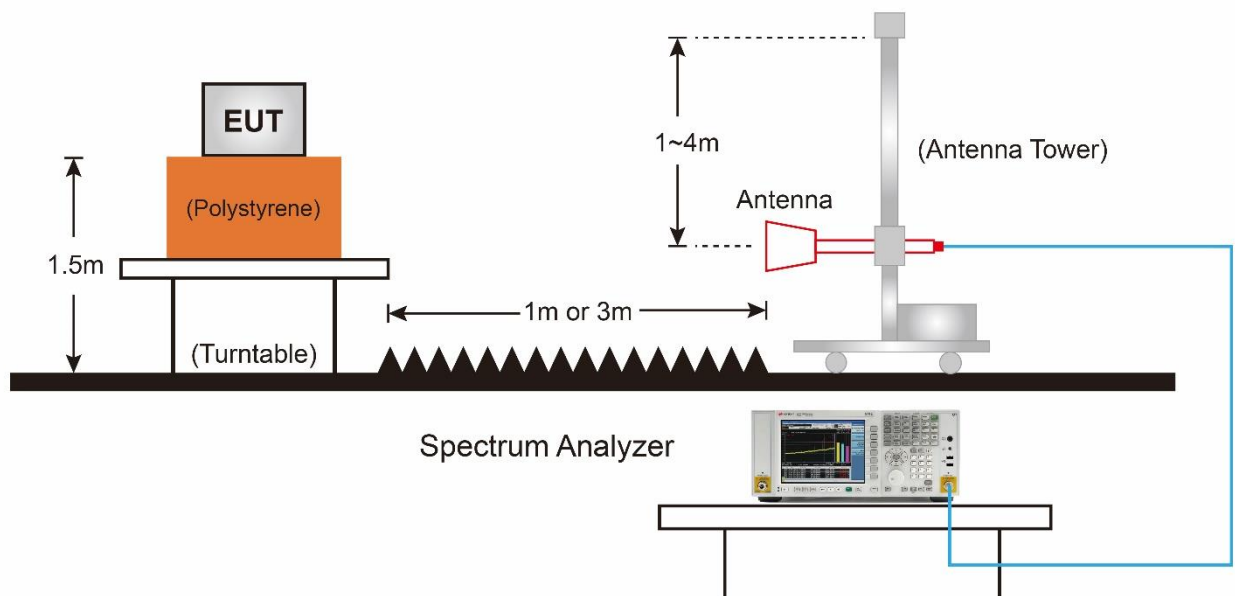

5.8.4. 不必要之發射測試結果

Mode No.: OAW-AP1361

Site: AC1	Time: 2020/04/24 - 14:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz with OAW-AP1361 (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9857.000	46.135	31.345	-22.065	68.200	14.790	PK
2		*	10307.500	46.989	30.738	-21.211	68.200	16.251	PK
3			11540.000	48.602	30.570	-25.398	74.000	18.032	PK
4			12296.500	47.478	29.667	-26.522	74.000	17.811	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5180MHz with OAW-AP1361 (CDD Mode)	

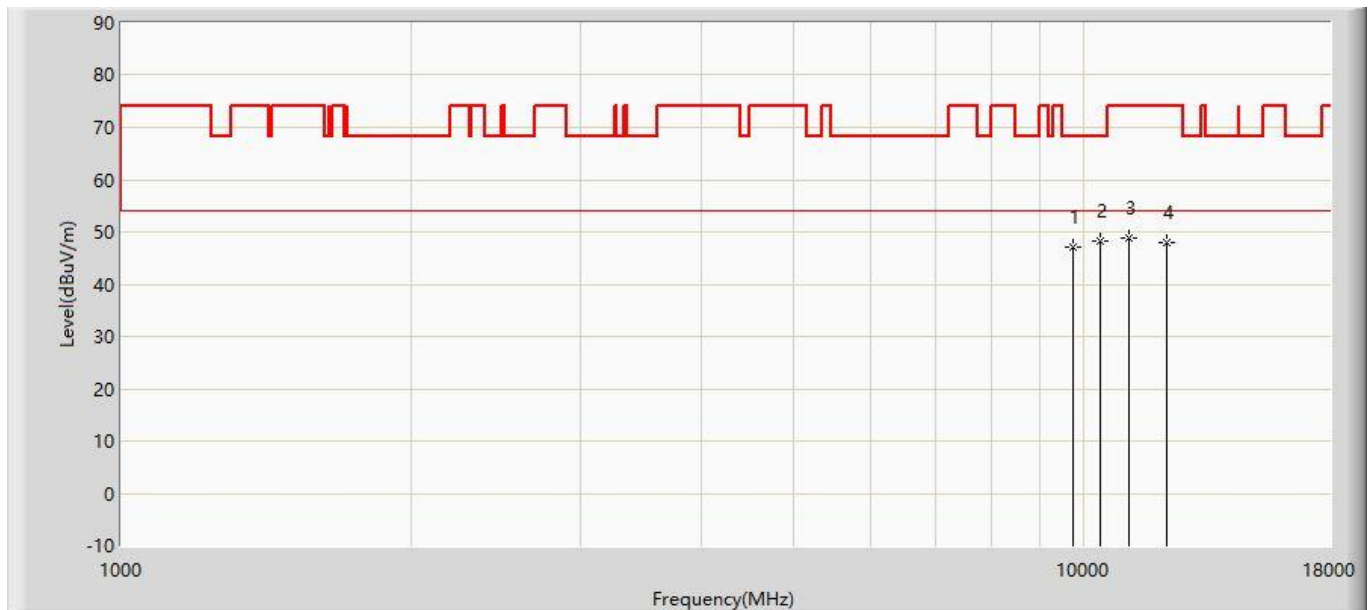


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9729.500	46.961	32.588	-21.239	68.200	14.373	PK
2		*	10401.000	48.308	31.757	-19.892	68.200	16.551	PK
3			11140.500	48.861	31.148	-25.139	74.000	17.712	PK
4			12177.500	47.956	30.141	-26.044	74.000	17.814	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5220MHz with OAW-AP1361 (CDD Mode)	

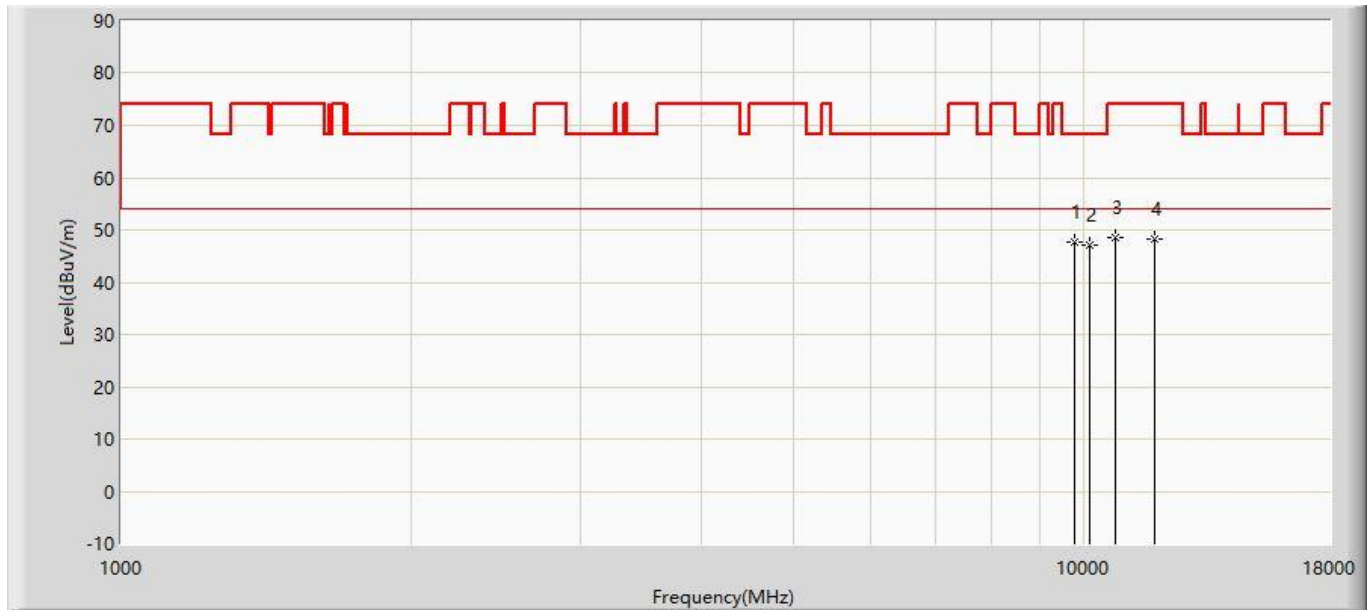


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9772.000	47.658	33.146	-20.542	68.200	14.512	PK
2			10129.000	47.049	31.374	-21.151	68.200	15.675	PK
3			10758.000	48.580	31.344	-25.420	74.000	17.236	PK
4			11837.500	48.233	30.338	-25.767	74.000	17.895	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5220MHz with OAW-AP1361 (CDD Mode)	

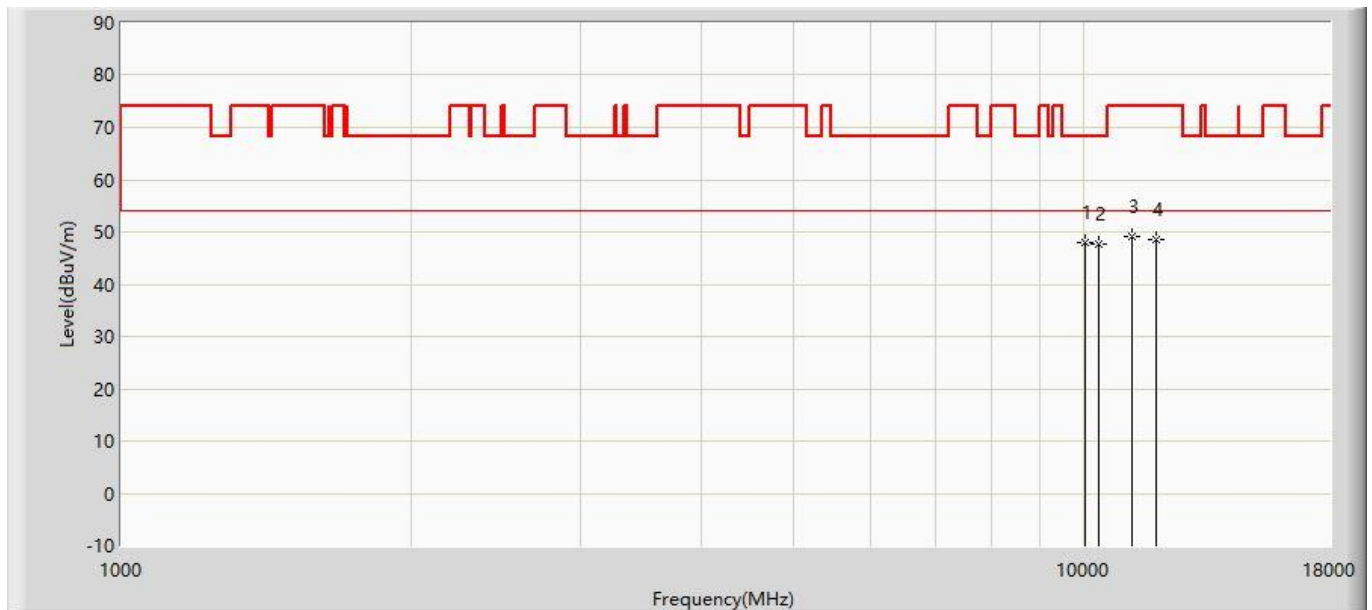


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	10018.500	47.969	32.650	-20.231	68.200	15.318	PK
2			10350.000	47.798	31.411	-20.402	68.200	16.387	PK
3			11200.000	49.251	31.483	-24.749	74.000	17.768	PK
4			11880.000	48.420	30.545	-25.580	74.000	17.875	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5240MHz with OAW-AP1361 (CDD Mode)	

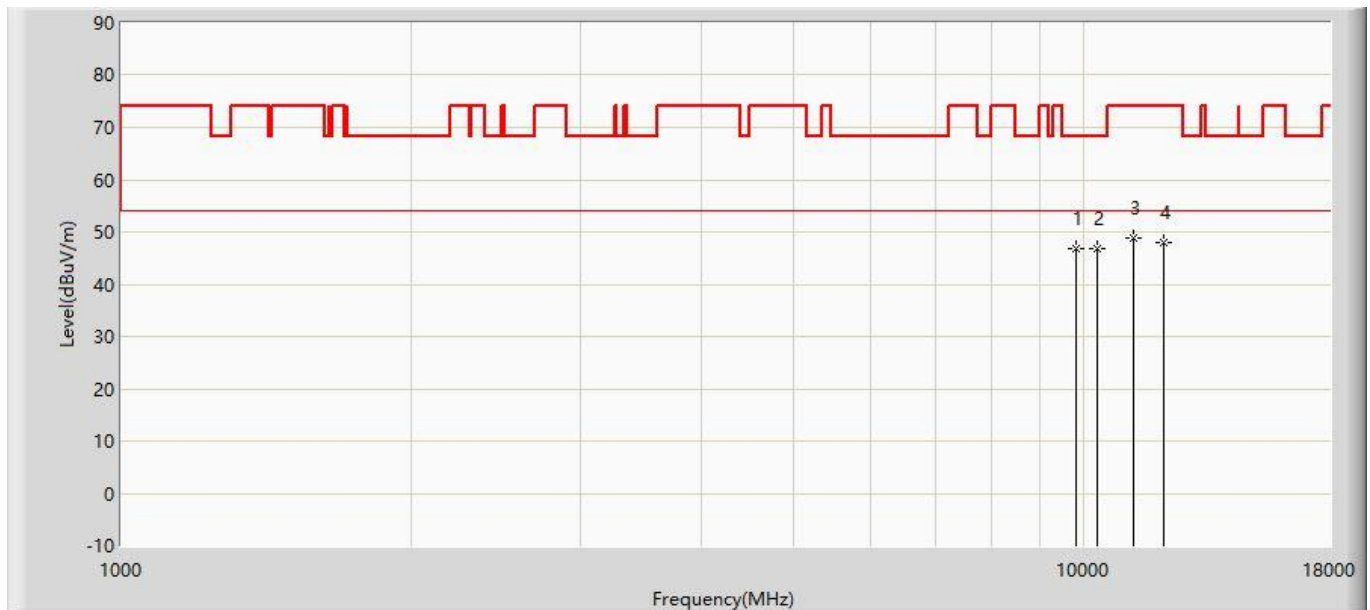


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9814.500	46.671	32.019	-21.529	68.200	14.652	PK
2		*	10316.000	46.764	30.486	-21.436	68.200	16.278	PK
3			11268.000	48.972	31.140	-25.028	74.000	17.832	PK
4			12109.500	47.994	30.178	-26.006	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5240MHz with OAW-AP1361 (CDD Mode)	

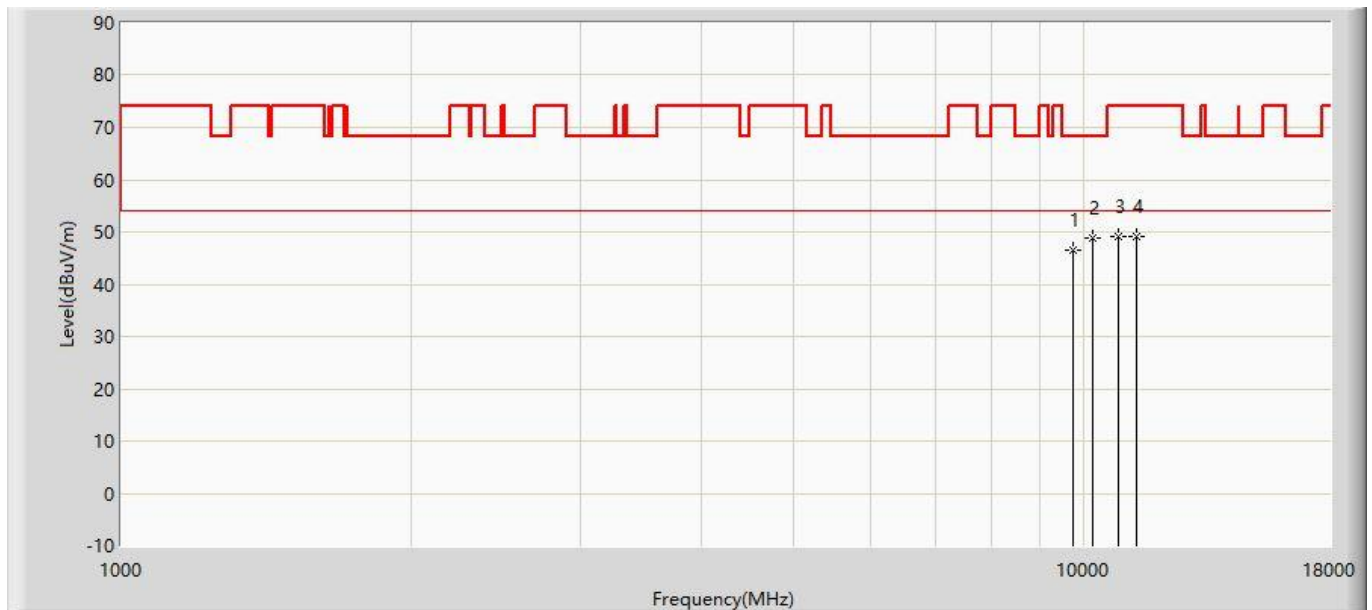


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9738.000	46.427	32.026	-21.773	68.200	14.401	PK
2		*	10205.500	48.804	32.882	-19.396	68.200	15.922	PK
3			10843.000	49.059	31.703	-24.941	74.000	17.356	PK
4			11344.500	49.273	31.369	-24.727	74.000	17.903	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5260MHz with OAW-AP1361 (CDD Mode)	

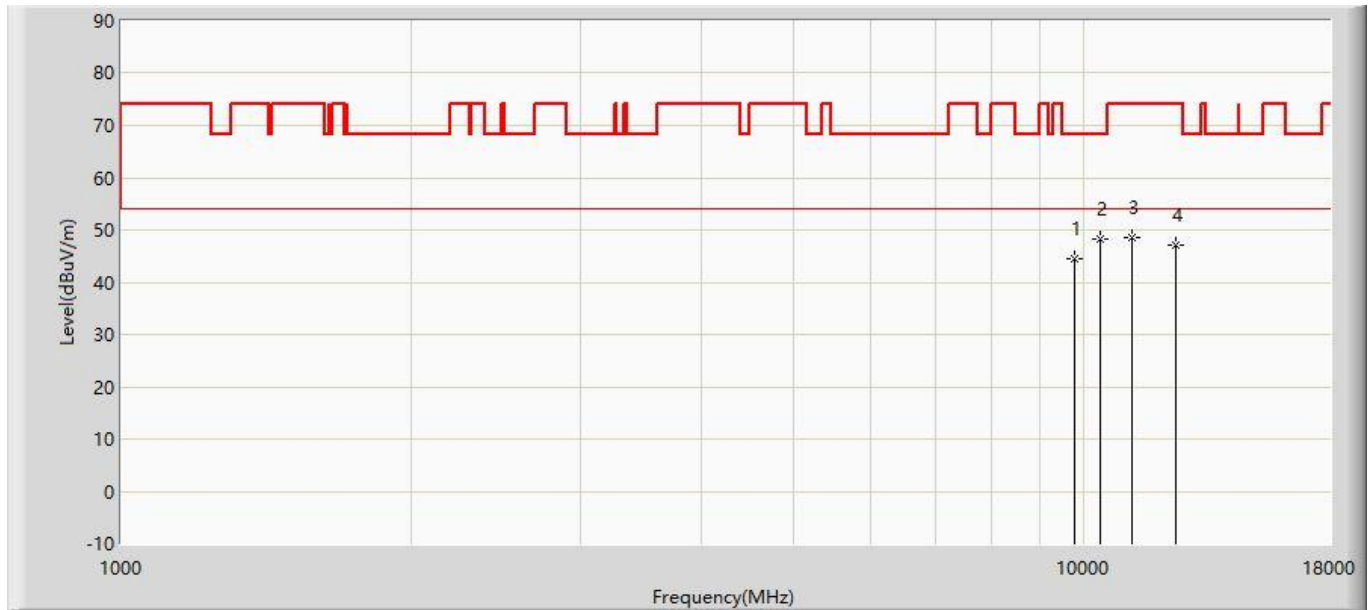


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9772.000	44.425	29.913	-23.775	68.200	14.512	PK
2		*	10384.000	48.249	31.753	-19.951	68.200	16.496	PK
3			11208.500	48.494	30.718	-25.506	74.000	17.777	PK
4			12441.000	47.086	29.279	-26.914	74.000	17.807	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5260MHz with OAW-AP1361 (CDD Mode)	

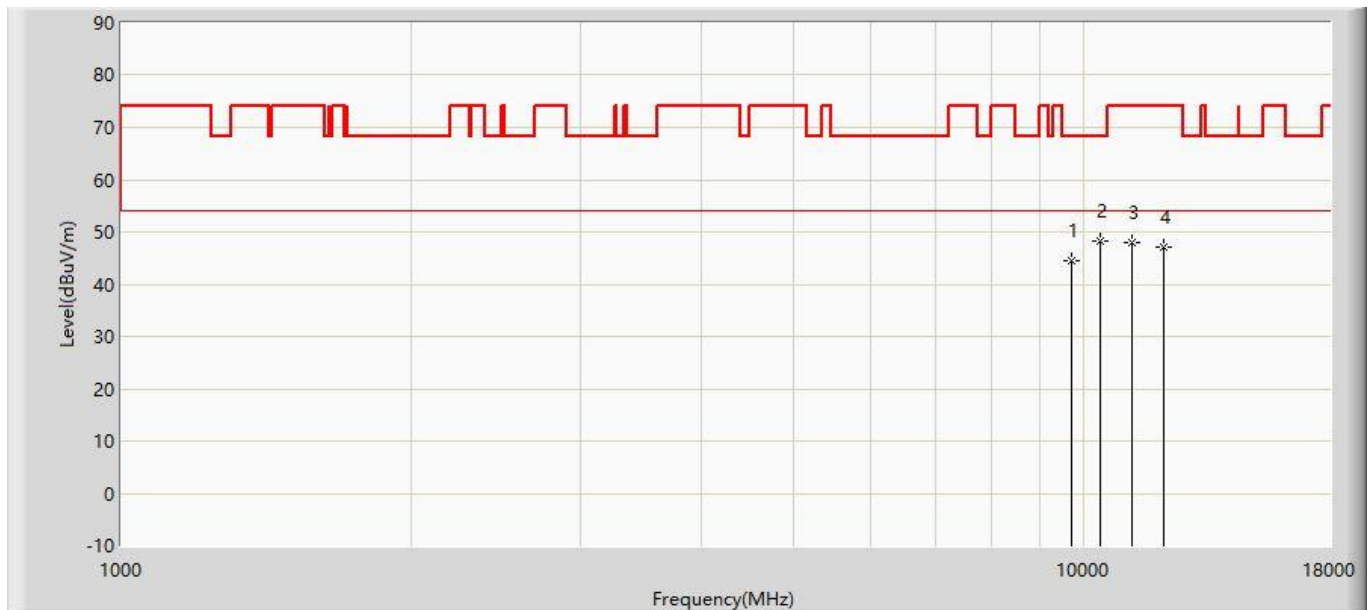


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9721.000	44.616	30.271	-23.584	68.200	14.345	PK
2		*	10375.500	48.163	31.694	-20.037	68.200	16.470	PK
3			11225.500	47.918	30.126	-26.082	74.000	17.792	PK
4			12084.000	47.147	29.329	-26.853	74.000	17.818	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5300MHz with OAW-AP1361 (CDD Mode)	

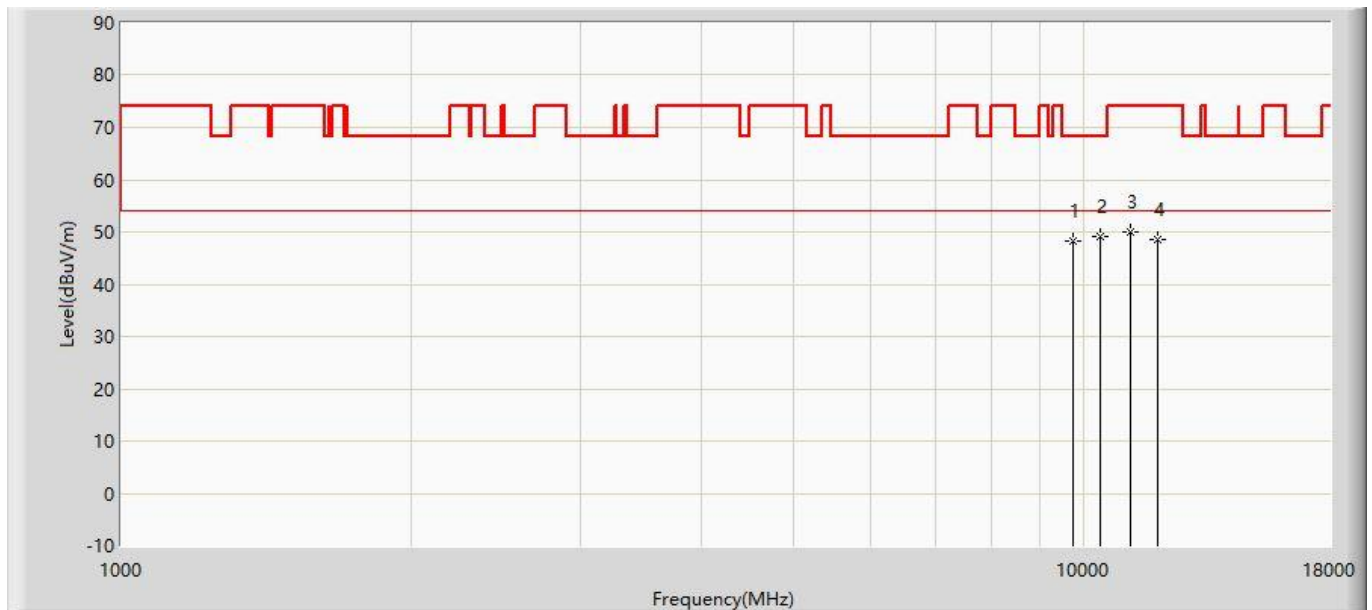


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9738.000	48.121	33.720	-20.079	68.200	14.401	PK
2		*	10384.000	49.014	32.518	-19.186	68.200	16.496	PK
3			11174.500	49.955	32.211	-24.045	74.000	17.743	PK
4			11931.000	48.649	30.798	-25.351	74.000	17.851	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5300MHz with OAW-AP1361 (CDD Mode)	

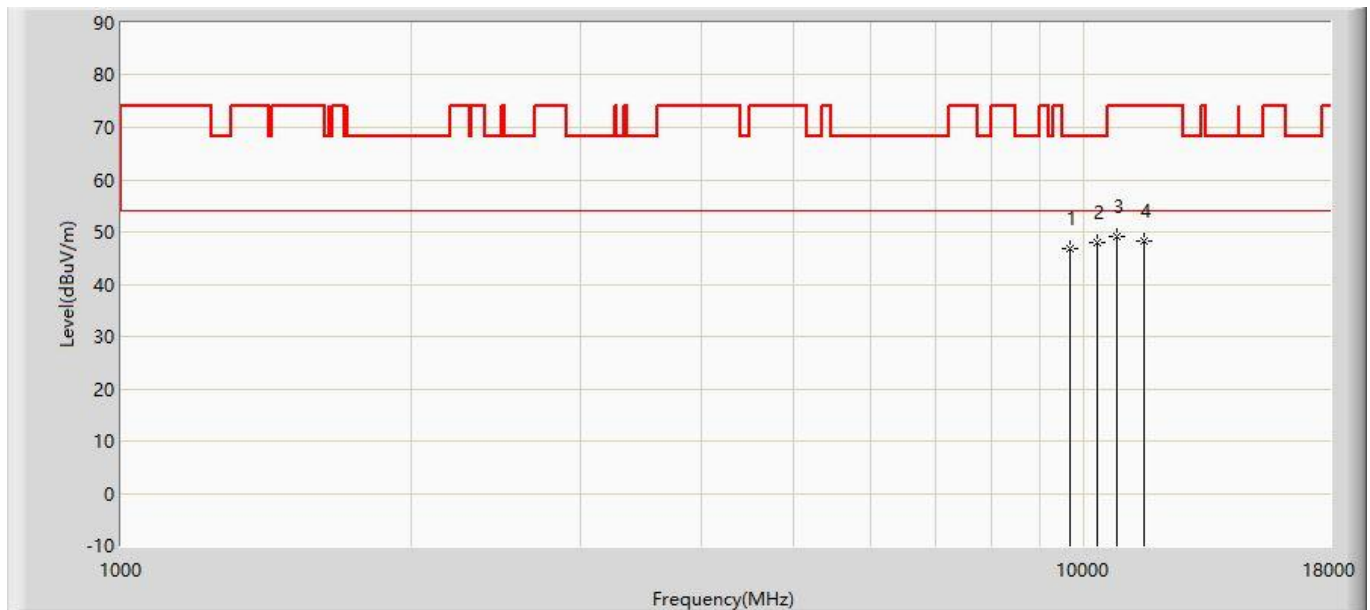


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9661.500	46.679	32.529	-21.521	68.200	14.151	PK
2		*	10324.500	47.879	31.574	-20.321	68.200	16.305	PK
3			10826.000	49.109	31.776	-24.891	74.000	17.333	PK
4			11540.000	48.360	30.328	-25.640	74.000	18.032	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5320MHz with OAW-AP1361 (CDD Mode)	

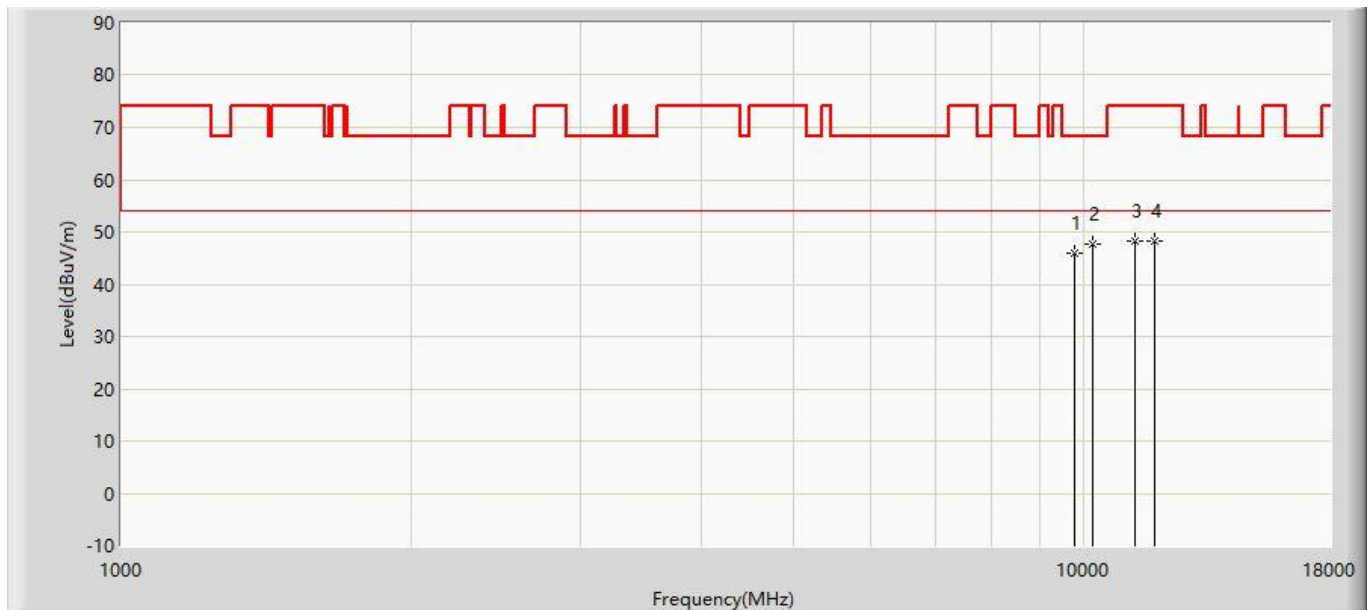


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9772.000	46.044	31.532	-22.156	68.200	14.512	PK
2		*	10214.000	47.633	31.684	-20.567	68.200	15.949	PK
3			11276.500	48.321	30.481	-25.679	74.000	17.840	PK
4			11829.000	48.322	30.423	-25.678	74.000	17.899	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5320MHz with OAW-AP1361 (CDD Mode)	

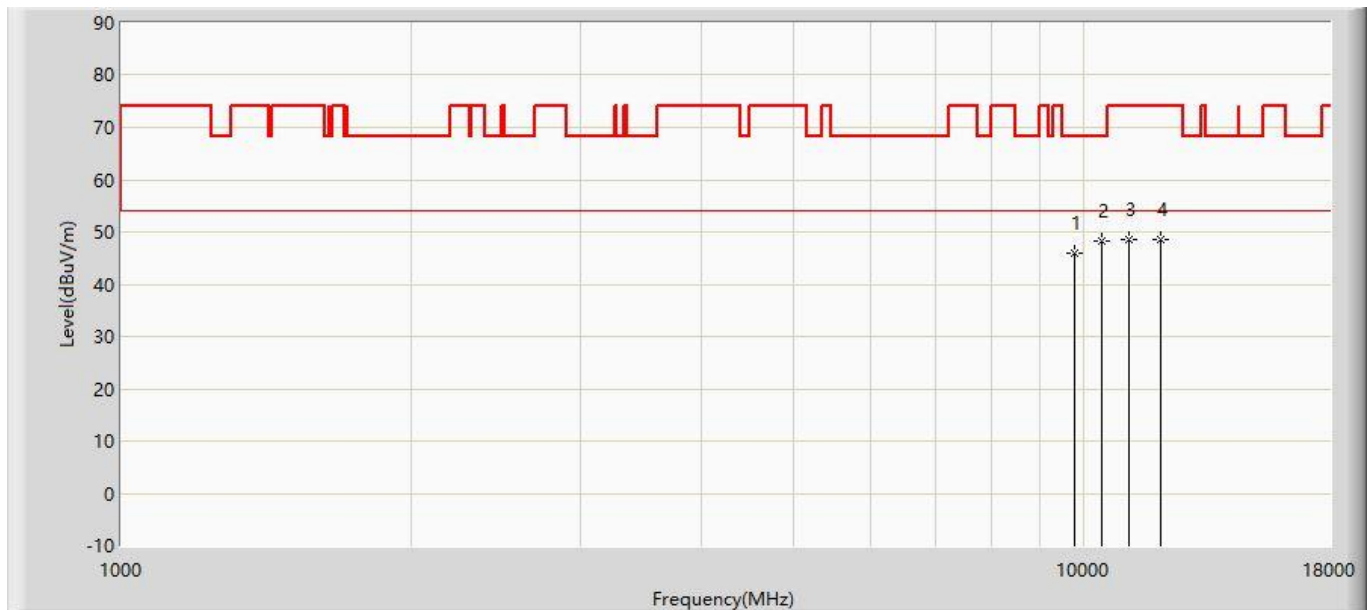


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9772.000	46.044	31.532	-22.156	68.200	14.512	PK
2		*	10418.000	48.295	31.689	-19.905	68.200	16.606	PK
3			11123.500	48.488	30.792	-25.512	74.000	17.696	PK
4			12016.000	48.470	30.651	-25.530	74.000	17.819	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5500MHz with OAW-AP1361 (CDD Mode)	

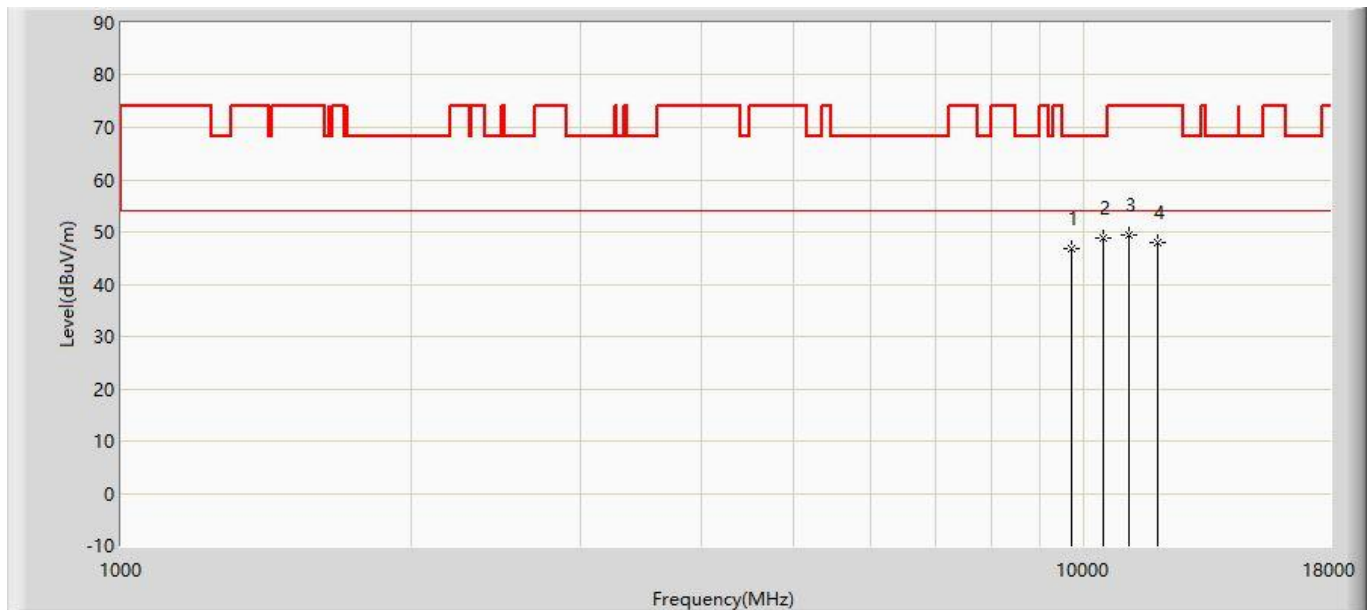


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9712.500	46.693	32.376	-21.507	68.200	14.316	PK
2		*	10452.000	48.720	32.005	-19.480	68.200	16.715	PK
3			11123.500	49.424	31.728	-24.576	74.000	17.696	PK
4			11939.500	48.069	30.221	-25.931	74.000	17.848	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5500MHz with OAW-AP1361 (CDD Mode)	

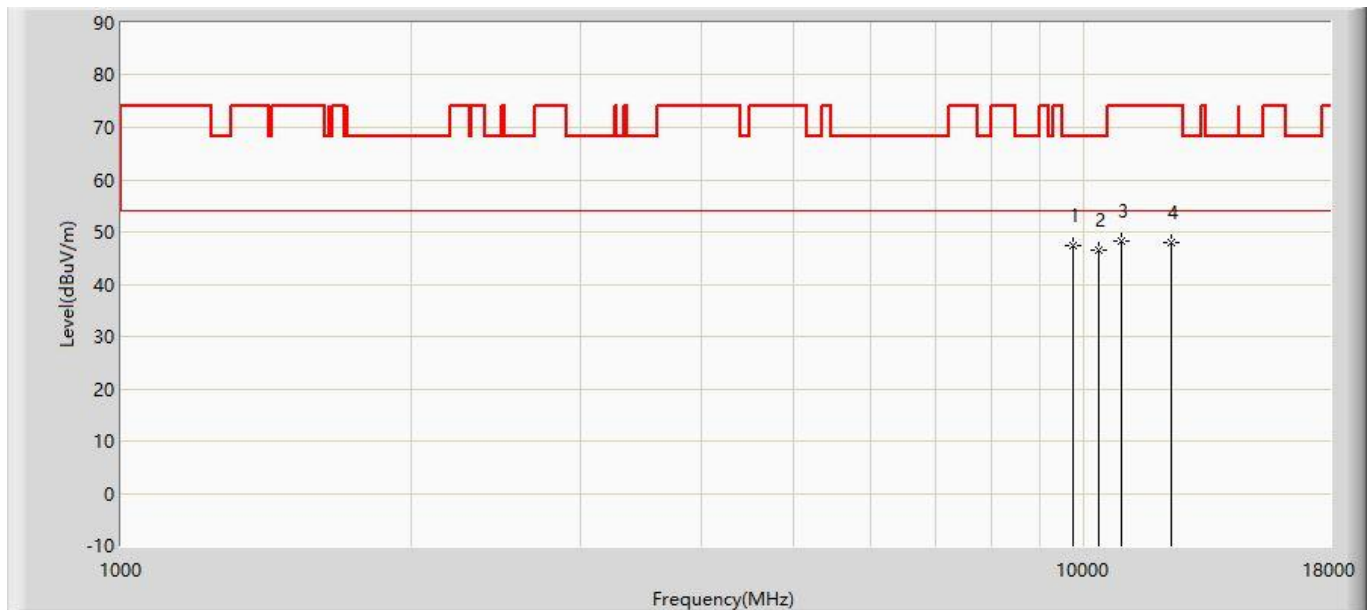


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9746.500	47.302	32.873	-20.898	68.200	14.428	PK
2			10350.000	46.421	30.034	-21.779	68.200	16.387	PK
3			10945.000	48.143	30.641	-25.857	74.000	17.502	PK
4			12296.500	48.039	30.228	-25.961	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5600MHz with OAW-AP1361 (CDD Mode)	

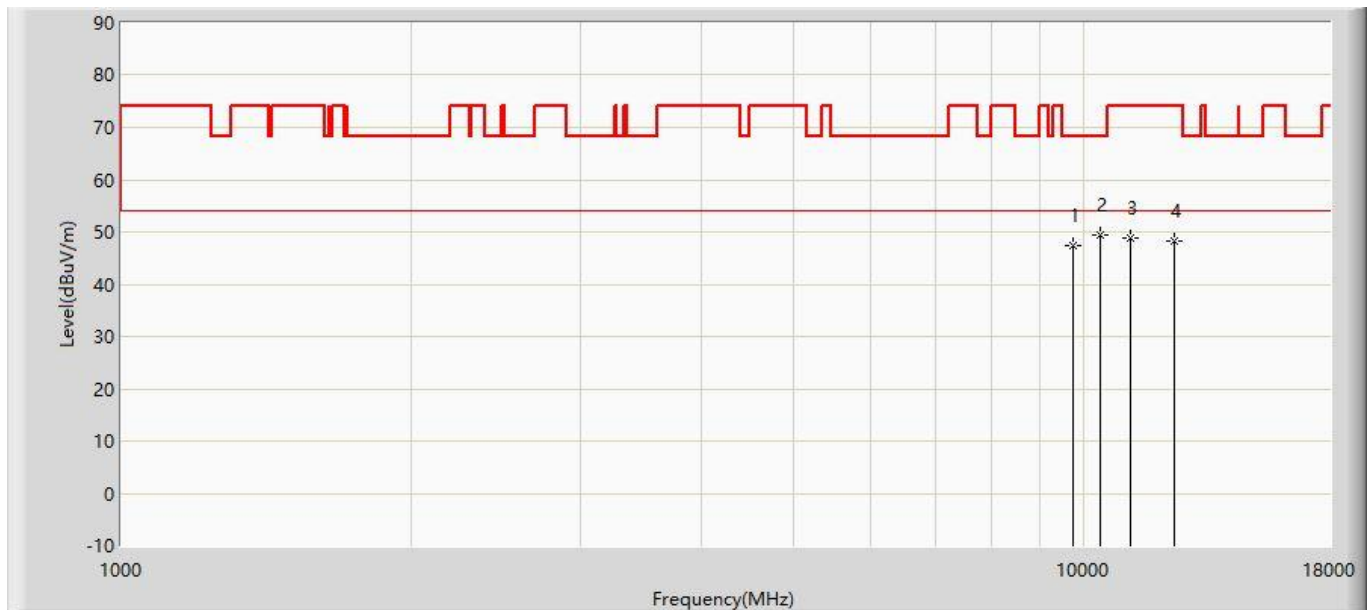


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9746.500	47.302	32.873	-20.898	68.200	14.428	PK
2		*	10384.000	49.321	32.825	-18.879	68.200	16.496	PK
3			11191.500	48.840	31.080	-25.160	74.000	17.760	PK
4			12398.500	48.315	30.507	-25.685	74.000	17.807	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5600MHz with OAW-AP1361 (CDD Mode)	

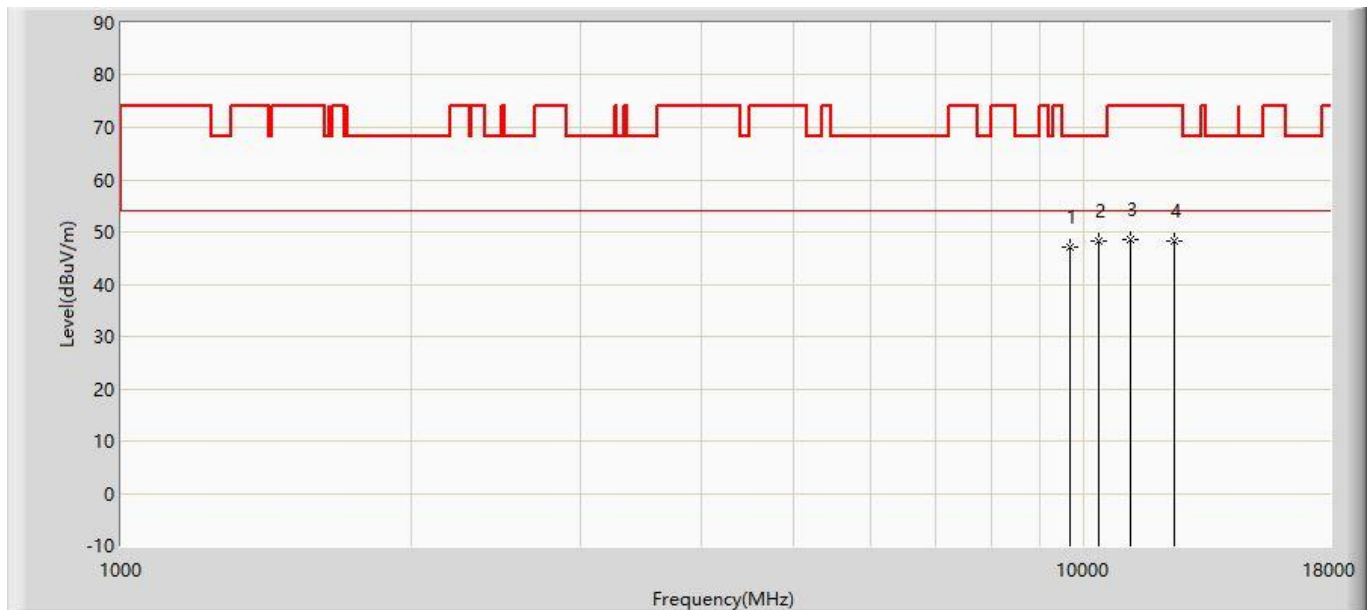


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9653.000	46.999	32.877	-21.201	68.200	14.122	PK
2		*	10358.500	48.133	31.719	-20.067	68.200	16.414	PK
3			11191.500	48.631	30.871	-25.369	74.000	17.760	PK
4			12398.500	48.315	30.507	-25.685	74.000	17.807	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5700MHz with OAW-AP1361 (CDD Mode)	

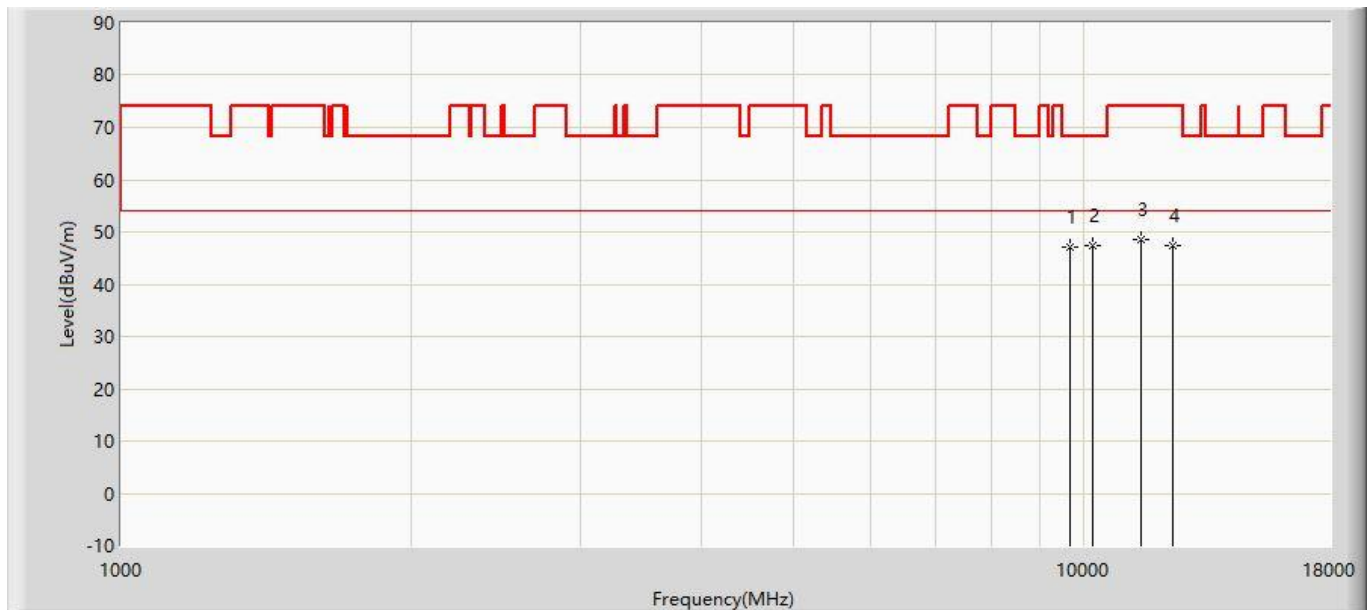


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9661.500	47.072	32.922	-21.128	68.200	14.151	PK
2		*	10205.500	47.489	31.567	-20.711	68.200	15.922	PK
3			11455.000	48.433	30.425	-25.567	74.000	18.008	PK
4			12373.000	47.379	29.570	-26.621	74.000	17.809	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5700MHz with OAW-AP1361 (CDD Mode)	

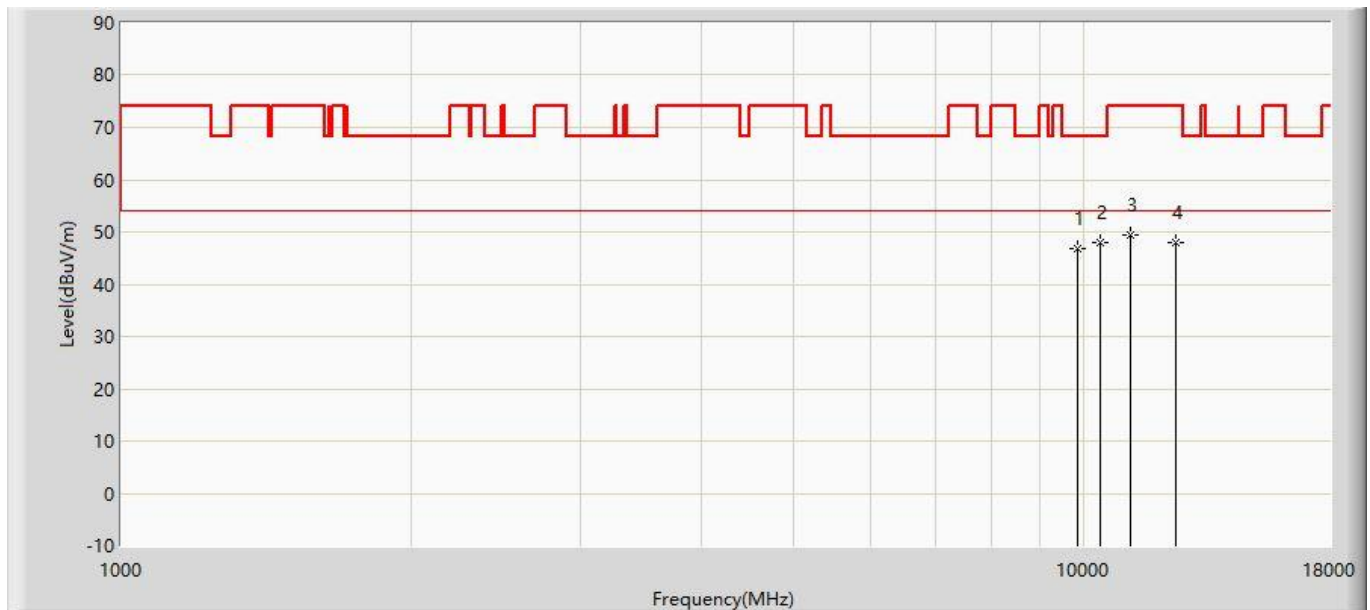


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9857.000	46.862	32.072	-21.338	68.200	14.790	PK
2		*	10409.500	48.048	31.469	-20.152	68.200	16.579	PK
3			11166.000	49.306	31.571	-24.694	74.000	17.735	PK
4			12432.500	48.071	30.264	-25.929	74.000	17.808	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5720MHz with OAW-AP1361 (CDD Mode)	

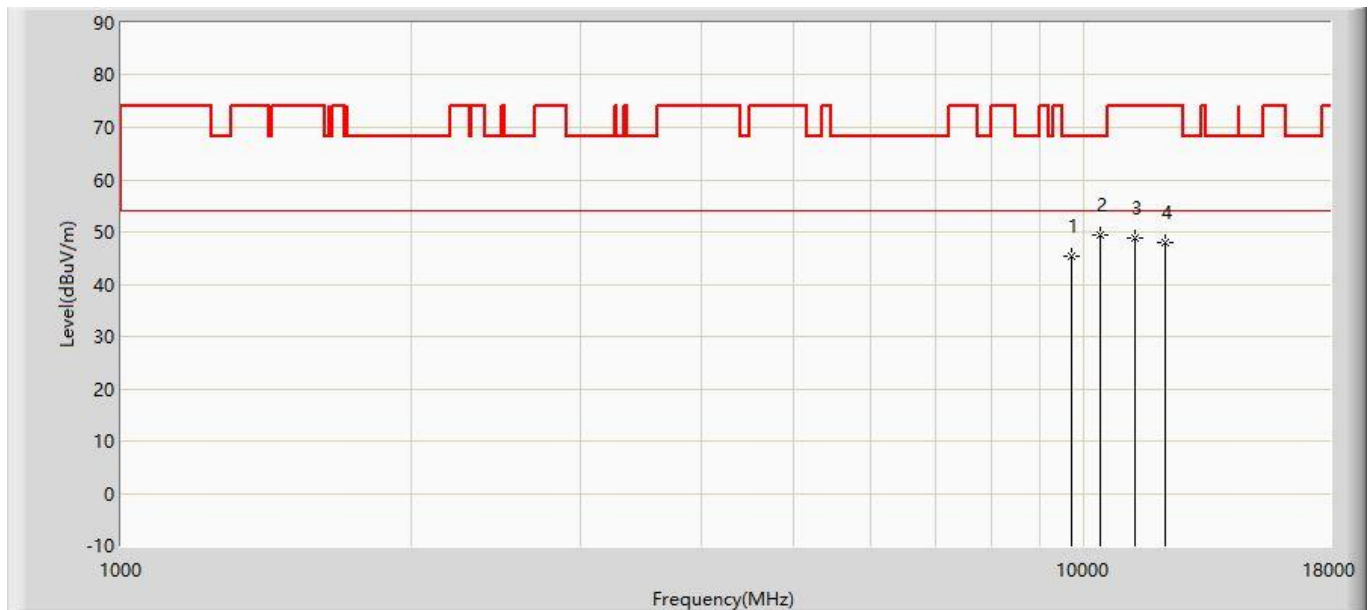


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9687.000	45.492	31.260	-22.708	68.200	14.232	PK
2		*	10401.000	49.449	32.898	-18.751	68.200	16.551	PK
3			11276.500	48.891	31.051	-25.109	74.000	17.840	PK
4			12143.500	47.974	30.158	-26.026	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:28
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5720MHz with OAW-AP1361 (CDD Mode)	

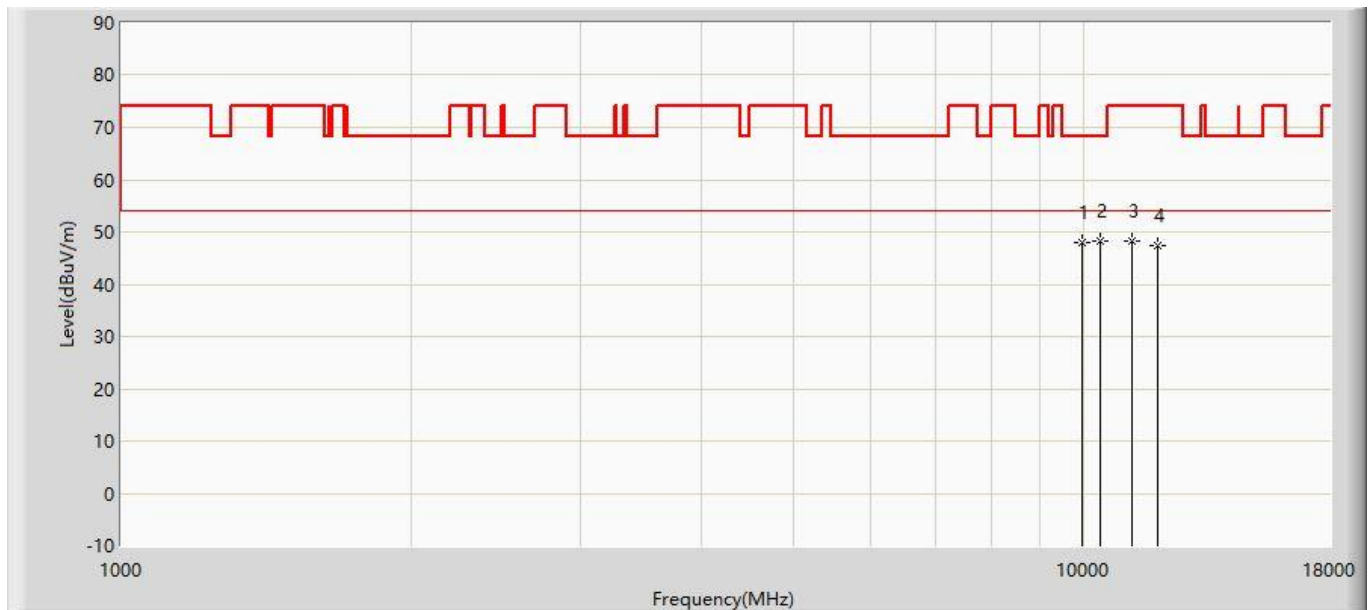


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9950.500	48.005	32.908	-20.195	68.200	15.097	PK
2		*	10409.500	48.345	31.766	-19.855	68.200	16.579	PK
3			11200.000	48.260	30.492	-25.740	74.000	17.768	PK
4			11939.500	47.392	29.544	-26.608	74.000	17.848	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5745MHz with OAW-AP1361 (CDD Mode)	

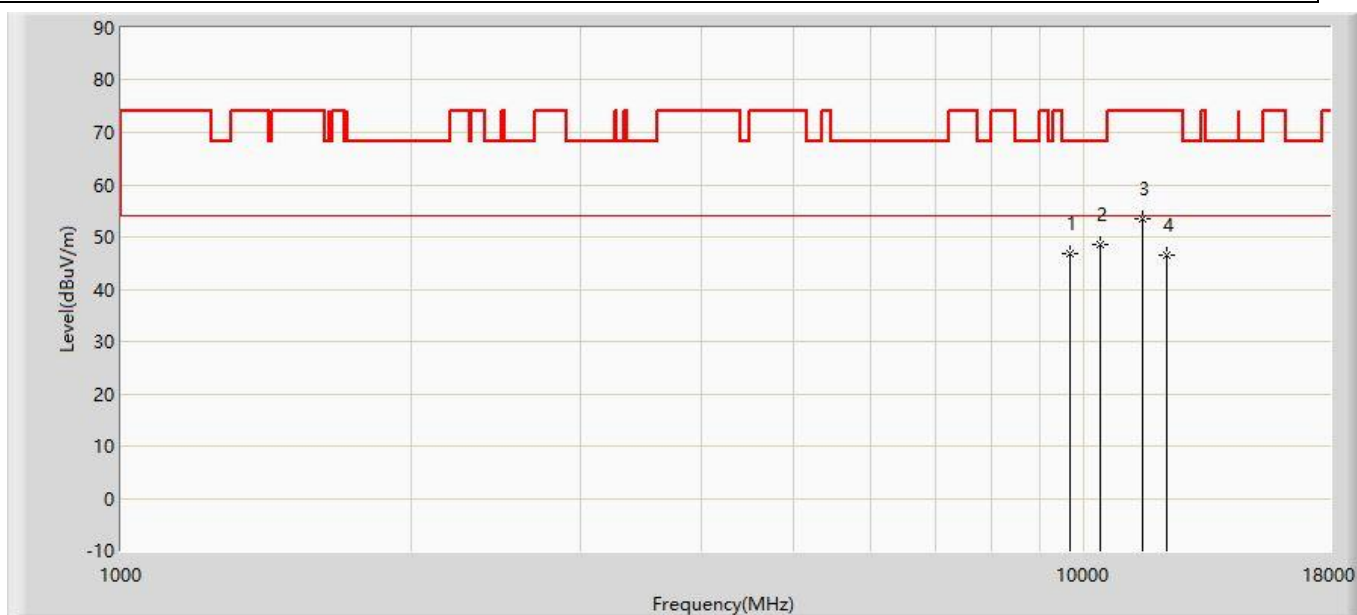


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9661.500	46.737	32.587	-21.463	68.200	14.151	PK
2		*	10409.500	48.518	31.939	-19.682	68.200	16.579	PK
3			11497.500	53.452	35.409	-20.548	74.000	18.043	PK
4			12169.000	46.553	28.737	-27.447	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5745MHz with OAW-AP1361 (CDD Mode)	

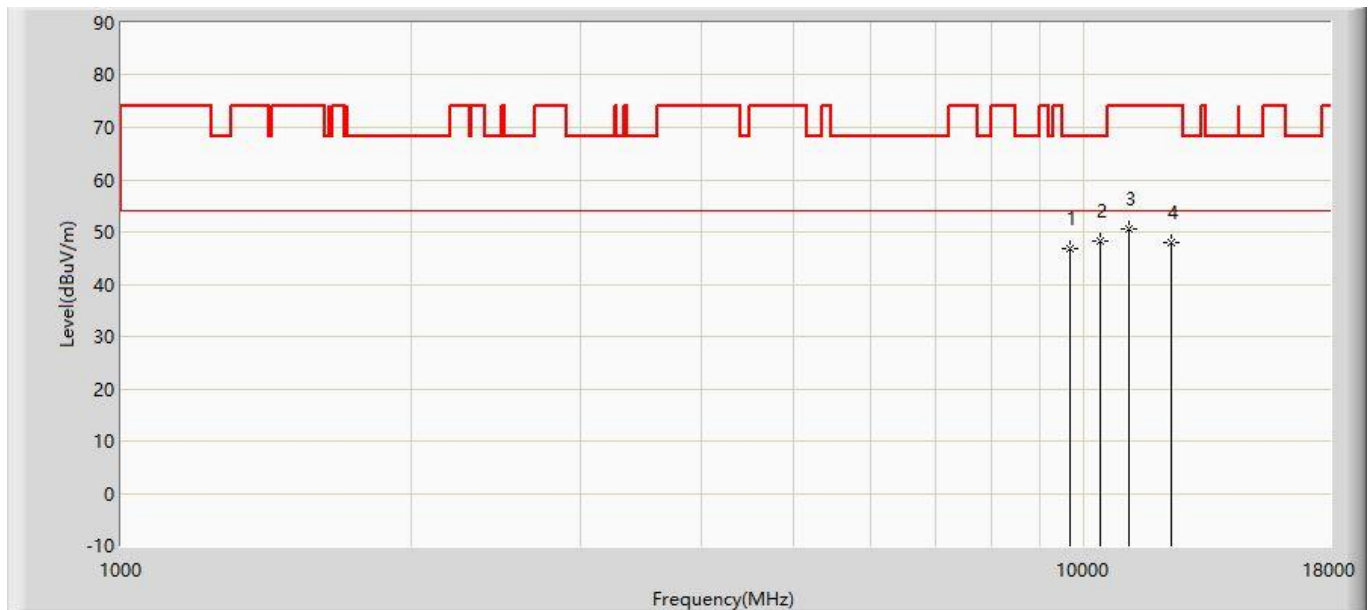


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9661.500	46.737	32.587	-21.463	68.200	14.151	PK
2		*	10401.000	48.343	31.792	-19.857	68.200	16.551	PK
3			11140.500	50.471	32.758	-23.529	74.000	17.712	PK
4			12322.000	48.086	30.275	-25.914	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5785MHz with OAW-AP1361 (CDD Mode)	

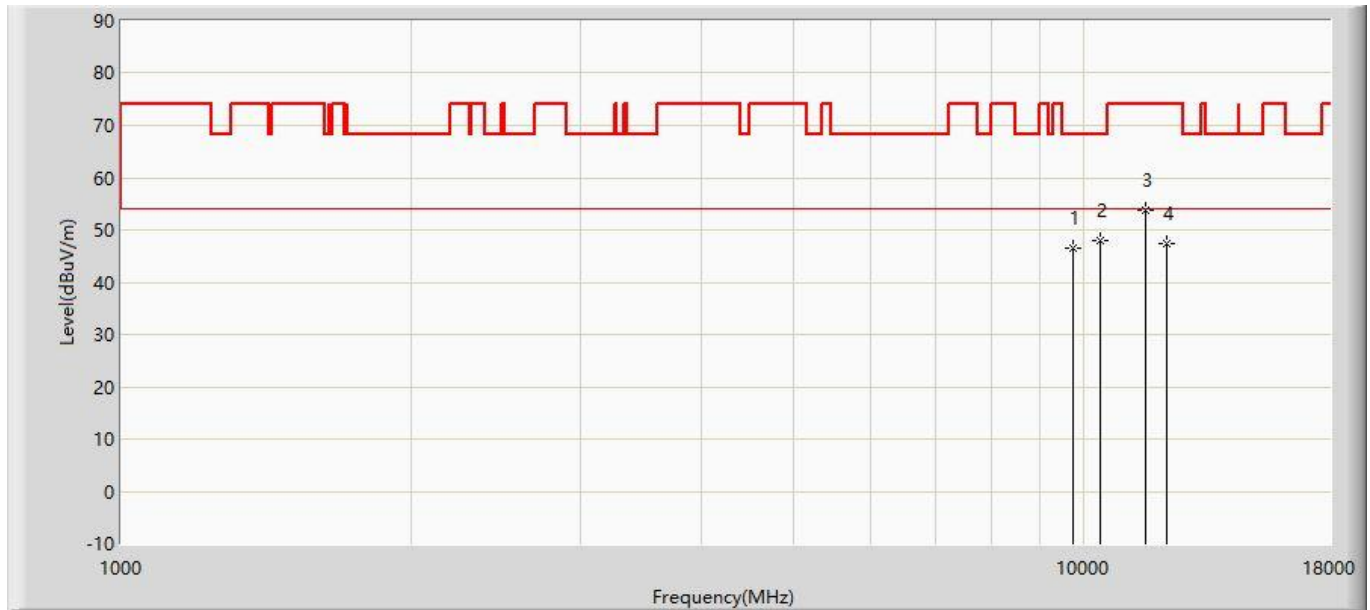


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9746.500	46.506	32.077	-21.694	68.200	14.428	PK
2		*	10384.000	48.095	31.599	-20.105	68.200	16.496	PK
3			11574.000	53.868	35.852	-20.132	74.000	18.016	PK
4			12177.500	47.353	29.538	-26.647	74.000	17.814	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5785MHz with OAW-AP1361 (CDD Mode)	

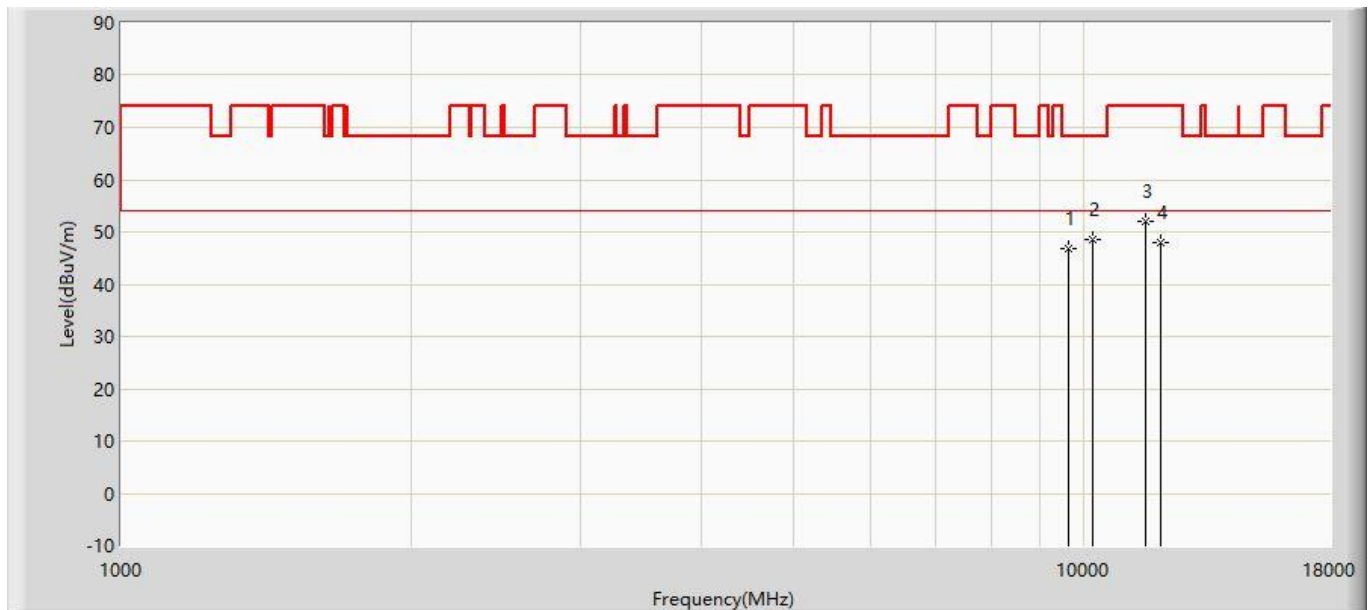


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9627.500	46.775	32.737	-21.425	68.200	14.038	PK
2		*	10222.500	48.537	32.560	-19.663	68.200	15.976	PK
3			11574.000	52.153	34.137	-21.847	74.000	18.016	PK
4			12024.500	47.936	30.117	-26.064	74.000	17.819	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5825MHz with OAW-AP1361 (CDD Mode)	

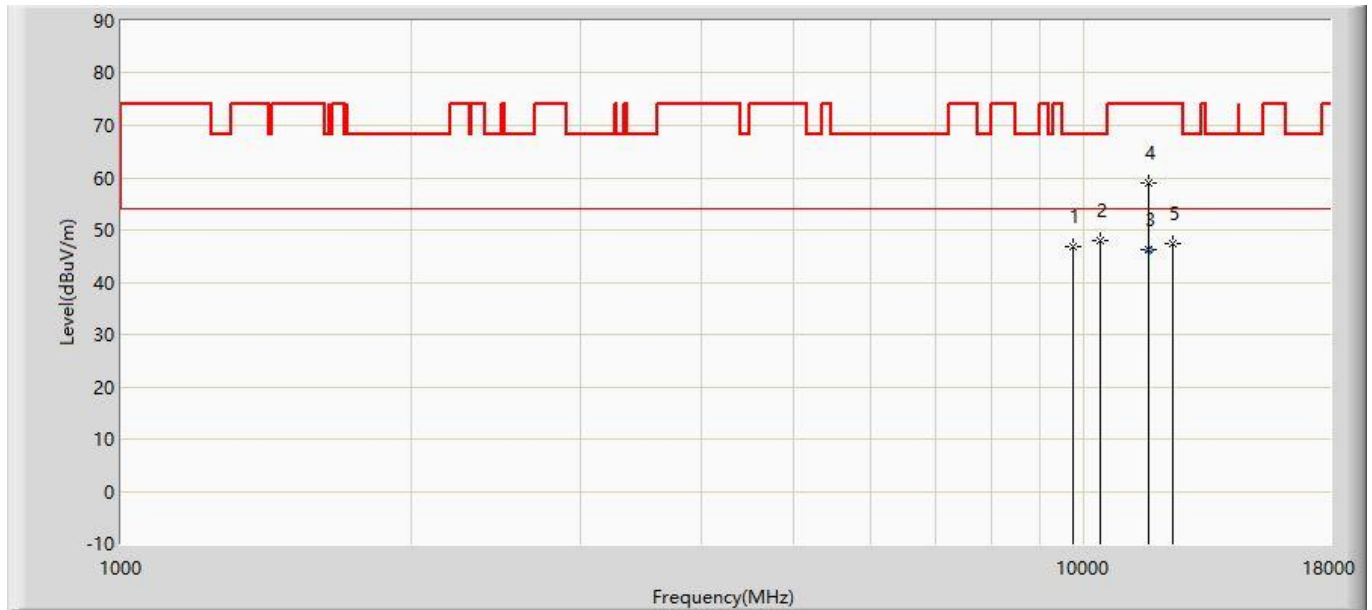


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9729.500	46.867	32.494	-21.333	68.200	14.373	PK
2			10401.000	47.873	31.322	-20.327	68.200	16.551	PK
3		*	11650.000	46.355	28.374	-7.645	54.000	17.981	AV
4			11650.500	58.966	40.985	-15.034	74.000	17.981	PK
5			12381.500	47.333	29.524	-26.667	74.000	17.808	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11a at Channel 5825MHz with OAW-AP1361 (CDD Mode)	

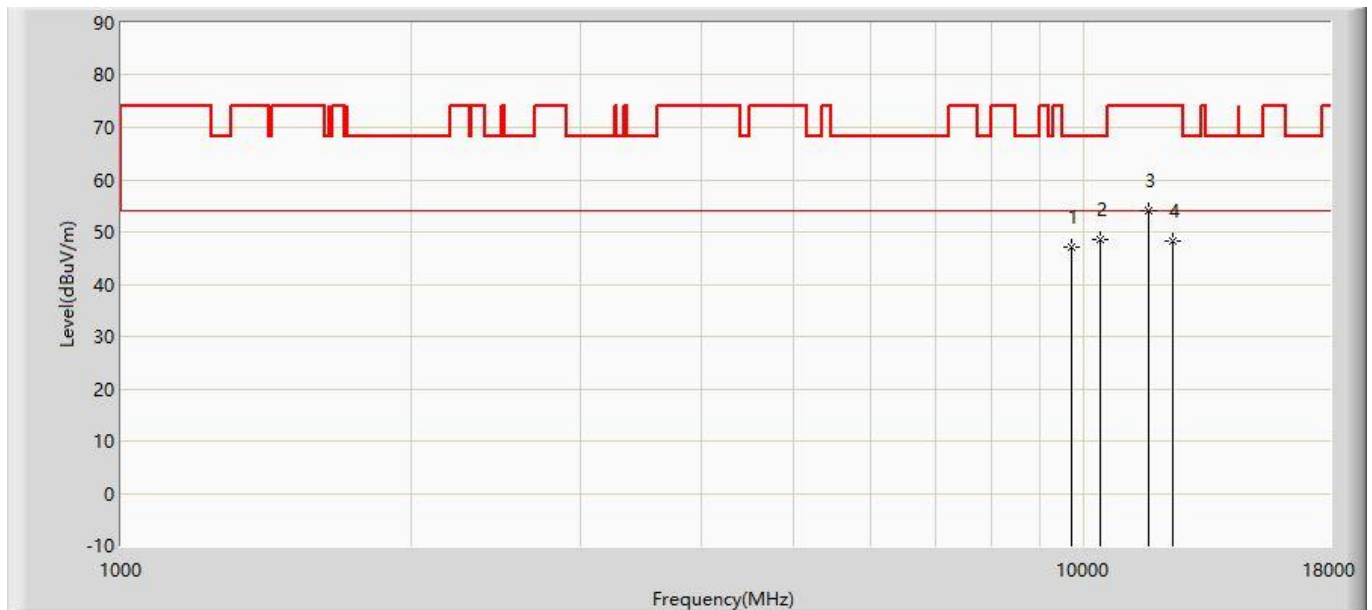


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9704.000	47.049	32.760	-21.151	68.200	14.289	PK
2		*	10392.500	48.626	32.103	-19.574	68.200	16.524	PK
3			11650.500	53.961	35.980	-20.039	74.000	17.981	PK
4			12373.000	48.175	30.366	-25.825	74.000	17.809	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz with OAW-AP1361 (CDD Mode)	

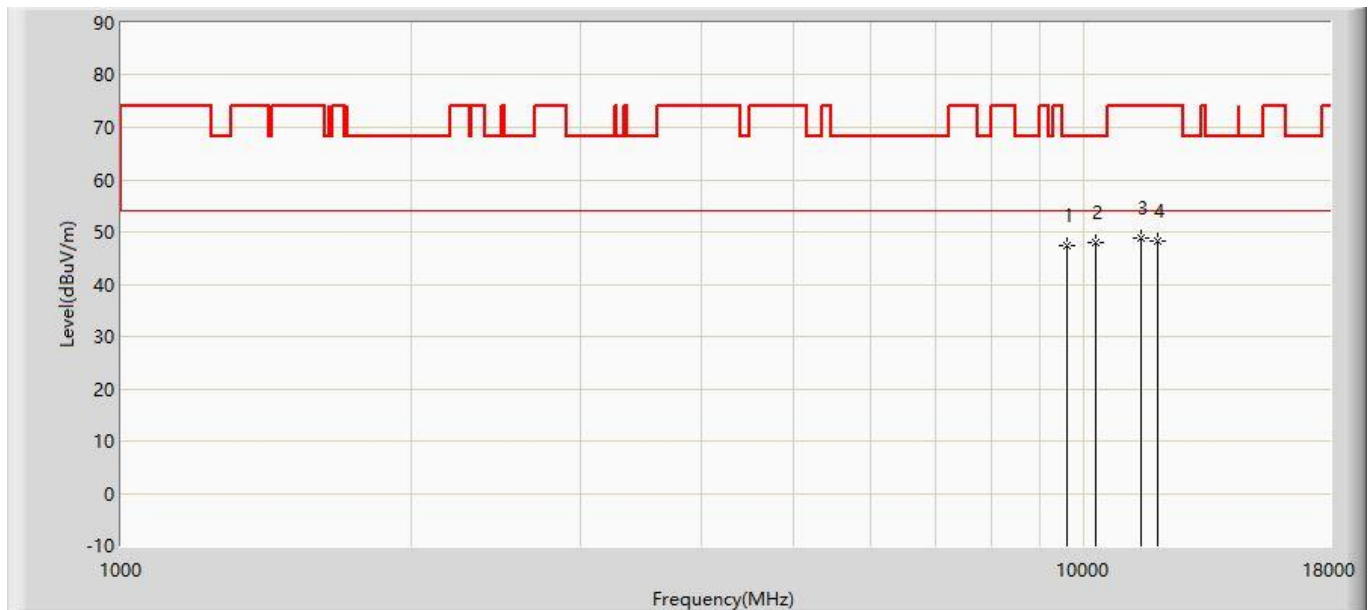


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9585.000	47.329	33.431	-20.871	68.200	13.898	PK
2		*	10299.000	48.102	31.879	-20.098	68.200	16.223	PK
3			11472.000	48.916	30.892	-25.084	74.000	18.024	PK
4			11914.000	48.349	30.489	-25.651	74.000	17.860	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz with OAW-AP1361 (CDD Mode)	

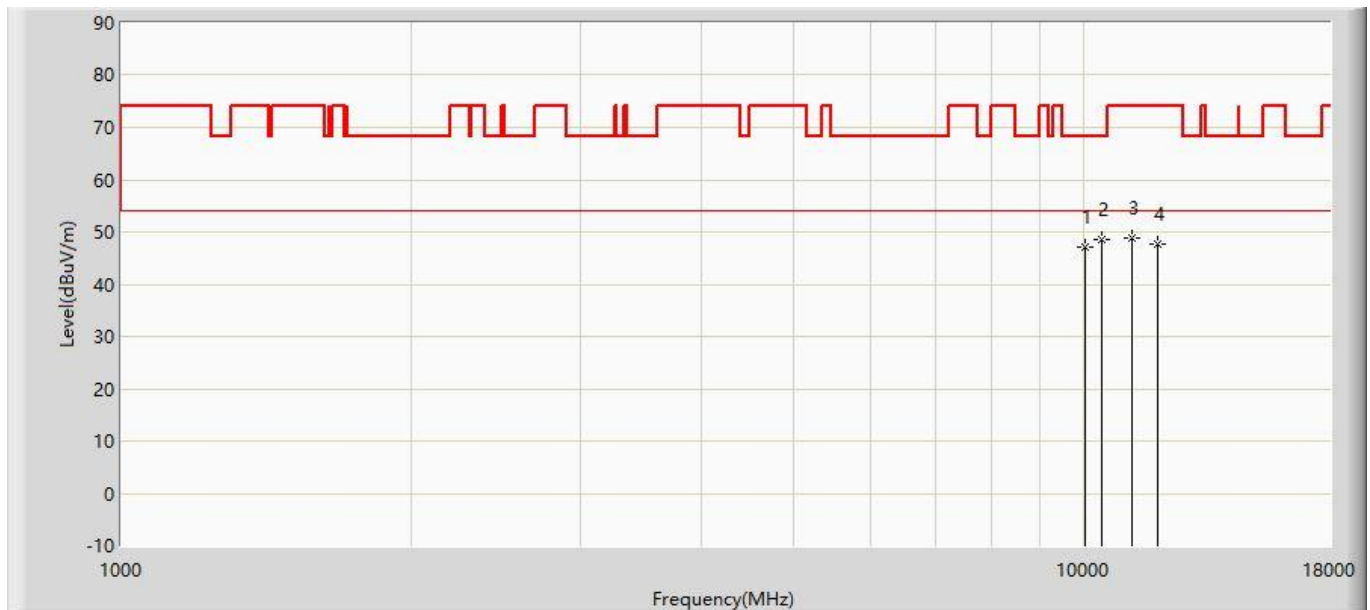


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			10018.500	47.201	31.882	-20.999	68.200	15.318	PK
2		*	10443.500	48.522	31.834	-19.678	68.200	16.688	PK
3			11200.000	48.881	31.113	-25.119	74.000	17.768	PK
4			11905.500	47.768	29.904	-26.232	74.000	17.863	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5220MHz with OAW-AP1361 (CDD Mode)	

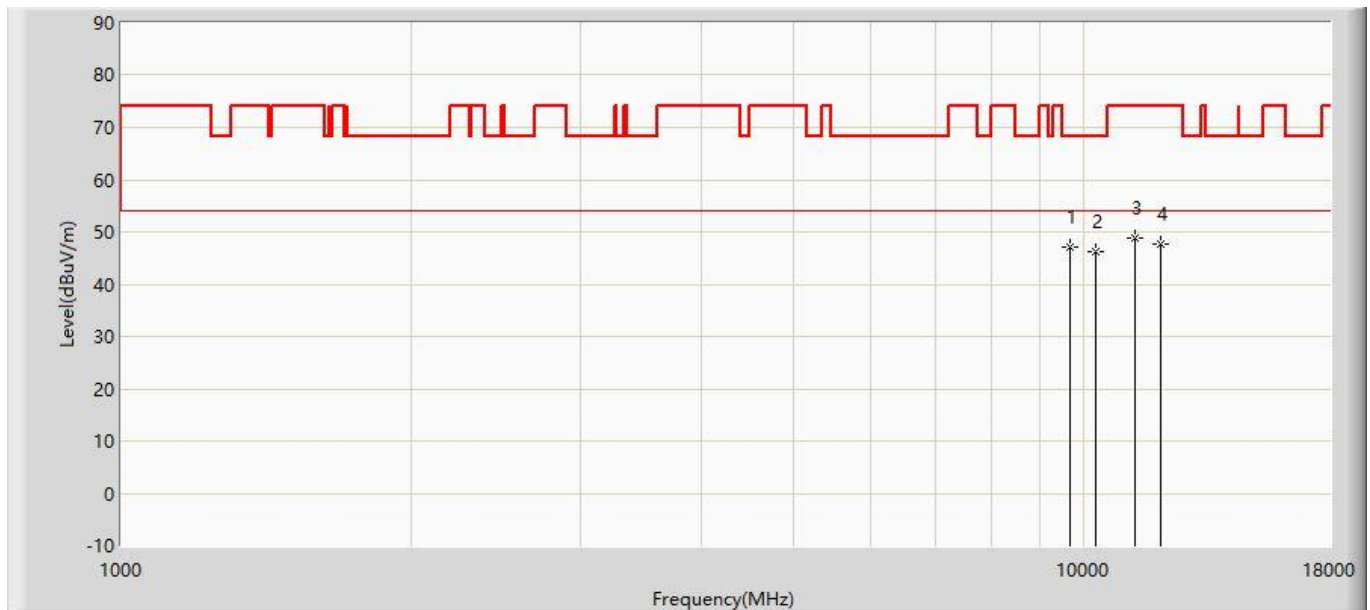


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9661.500	46.968	32.818	-21.232	68.200	14.151	PK
2			10265.000	46.262	30.149	-21.938	68.200	16.113	PK
3			11310.500	48.810	30.938	-25.190	74.000	17.873	PK
4			12016.000	47.631	29.812	-26.369	74.000	17.819	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5220MHz with OAW-AP1361 (CDD Mode)	

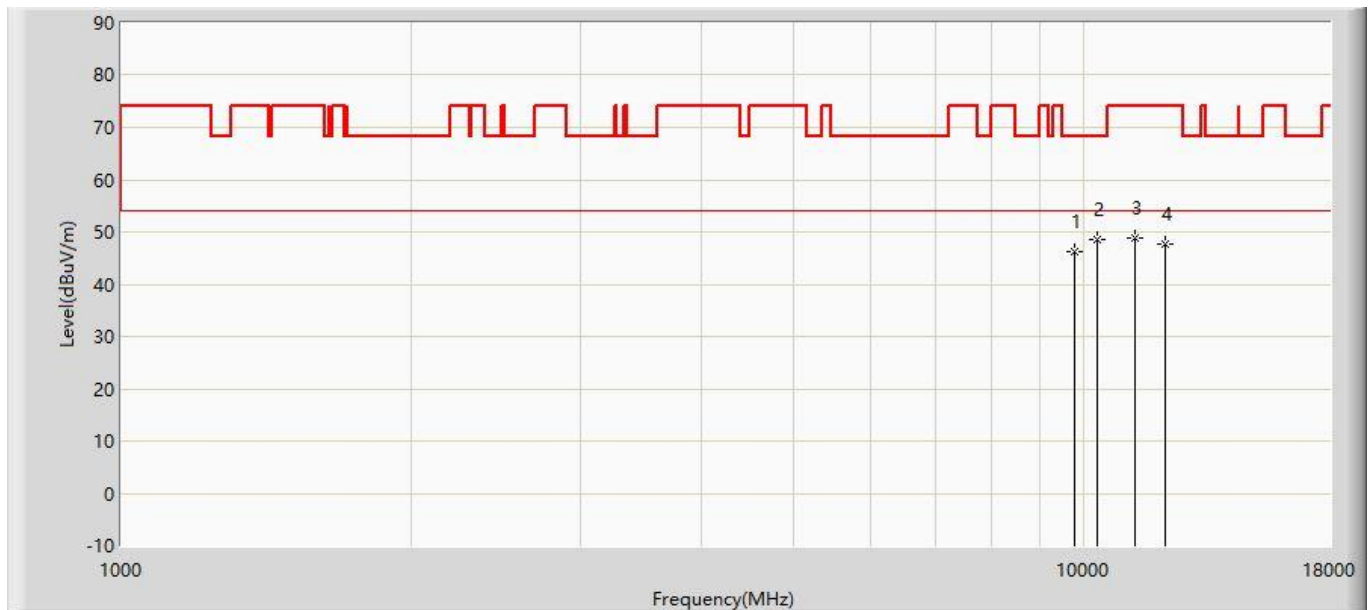


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9772.000	46.338	31.826	-21.862	68.200	14.512	PK
2		*	10324.500	48.500	32.195	-19.700	68.200	16.305	PK
3			11285.000	48.962	31.115	-25.038	74.000	17.847	PK
4			12160.500	47.644	29.828	-26.356	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5240MHz with OAW-AP1361 (CDD Mode)	

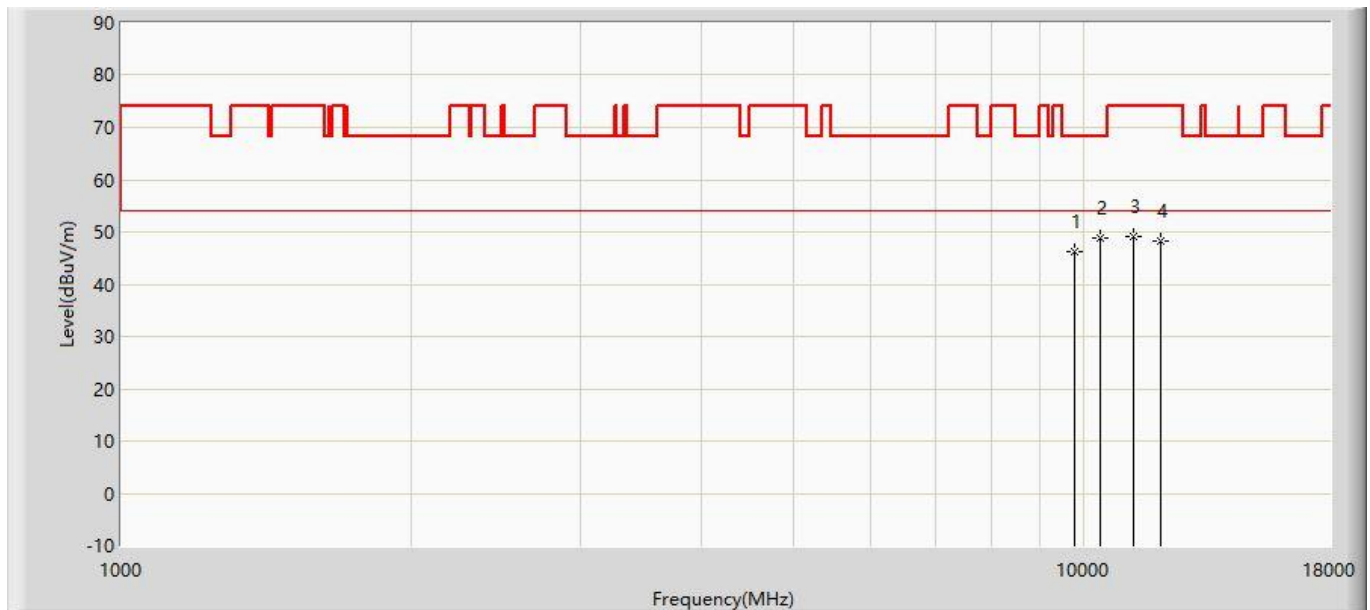


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9772.000	46.143	31.631	-22.057	68.200	14.512	PK
2		*	10384.000	48.952	32.456	-19.248	68.200	16.496	PK
3			11268.000	48.986	31.154	-25.014	74.000	17.832	PK
4			12016.000	48.322	30.503	-25.678	74.000	17.819	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5240MHz with OAW-AP1361 (CDD Mode)	

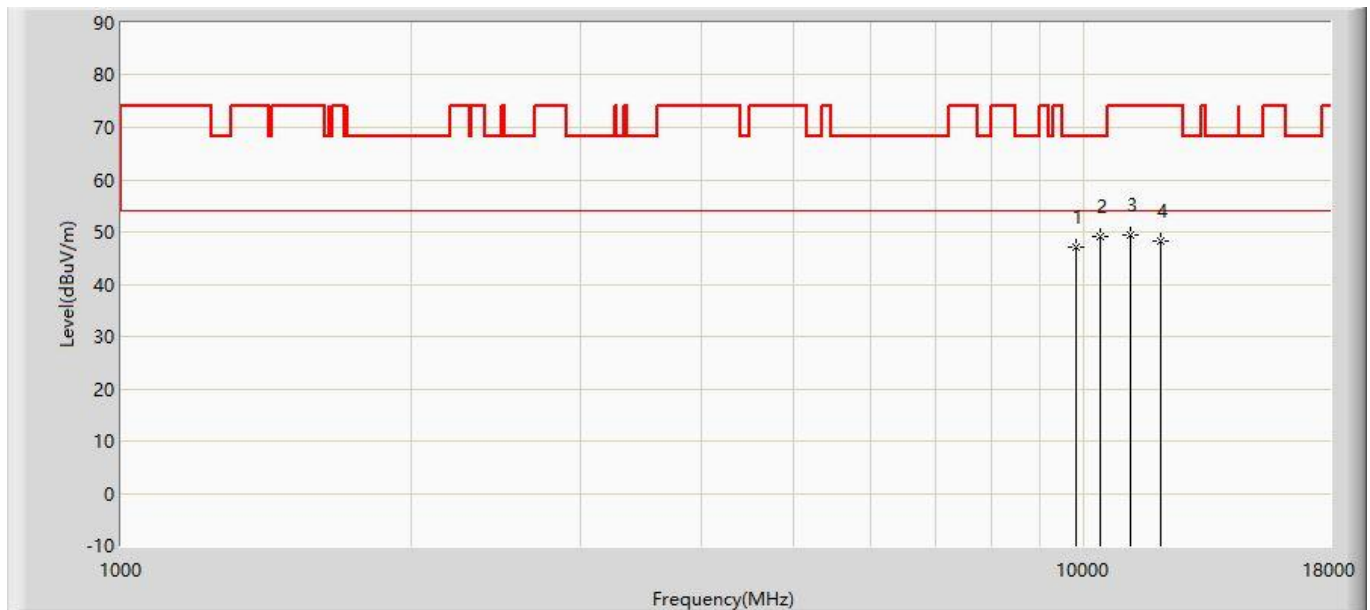


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9823.000	47.188	32.508	-21.012	68.200	14.680	PK
2		*	10384.000	49.160	32.664	-19.040	68.200	16.496	PK
3			11157.500	49.494	31.766	-24.506	74.000	17.728	PK
4			12016.000	48.338	30.519	-25.662	74.000	17.819	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5260MHz with OAW-AP1361 (CDD Mode)	

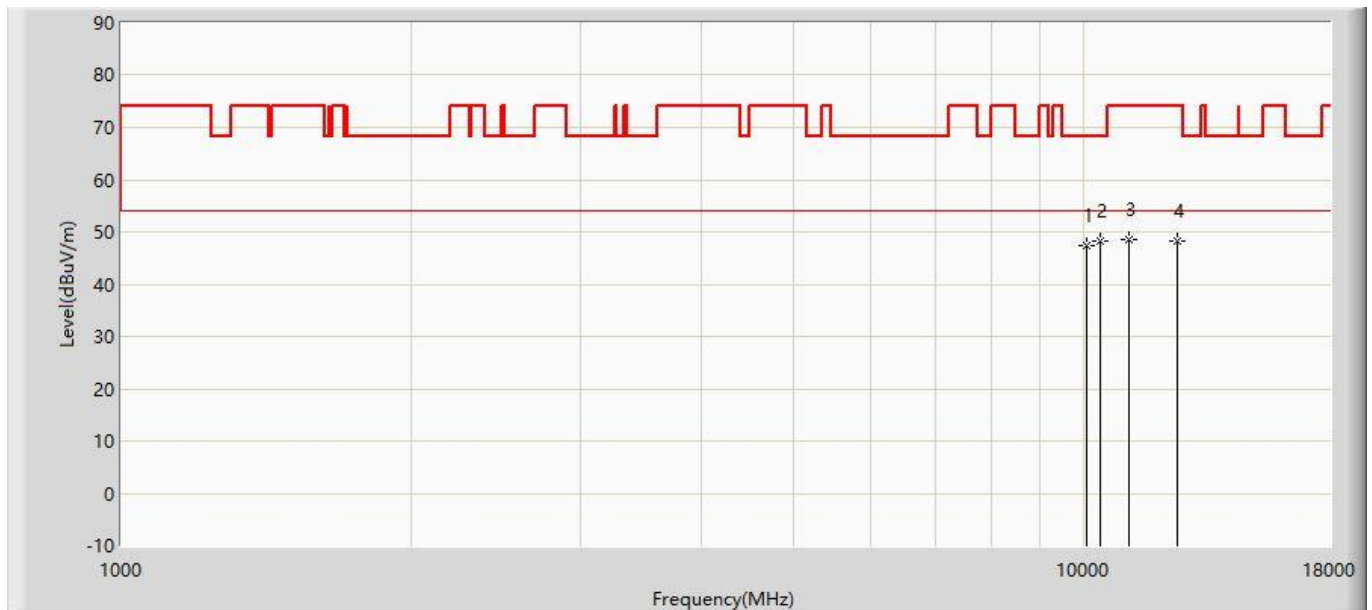


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			10061.000	47.426	31.970	-20.774	68.200	15.456	PK
2		*	10401.000	48.127	31.576	-20.073	68.200	16.551	PK
3			11149.000	48.664	30.944	-25.336	74.000	17.720	PK
4			12492.000	48.184	30.379	-25.816	74.000	17.805	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5260MHz with OAW-AP1361 (CDD Mode)	

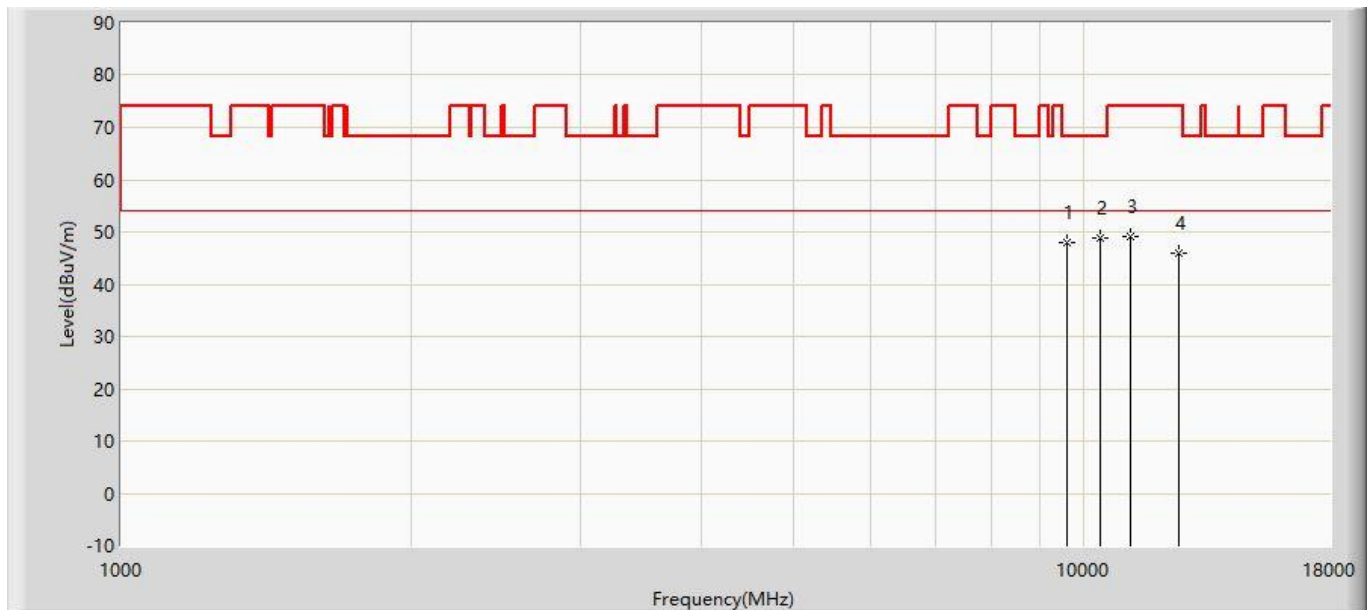


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9585.000	47.989	34.091	-20.211	68.200	13.898	PK
2		*	10401.000	48.817	32.266	-19.383	68.200	16.551	PK
3			11166.000	49.033	31.298	-24.967	74.000	17.735	PK
4			12551.500	46.011	28.074	-27.989	74.000	17.936	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5300MHz with OAW-AP1361 (CDD Mode)	

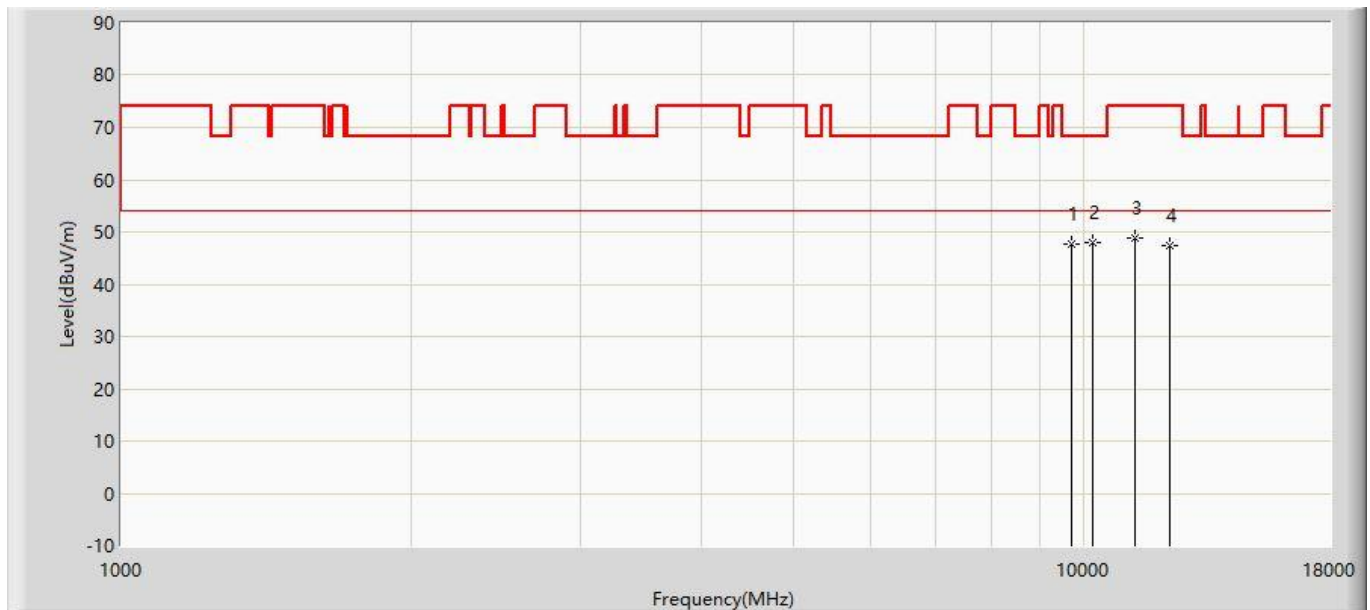


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9704.000	47.573	33.284	-20.627	68.200	14.289	PK
2		*	10214.000	48.088	32.139	-20.112	68.200	15.949	PK
3			11276.500	48.727	30.887	-25.273	74.000	17.840	PK
4			12262.500	47.372	29.560	-26.628	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5300MHz with OAW-AP1361 (CDD Mode)	

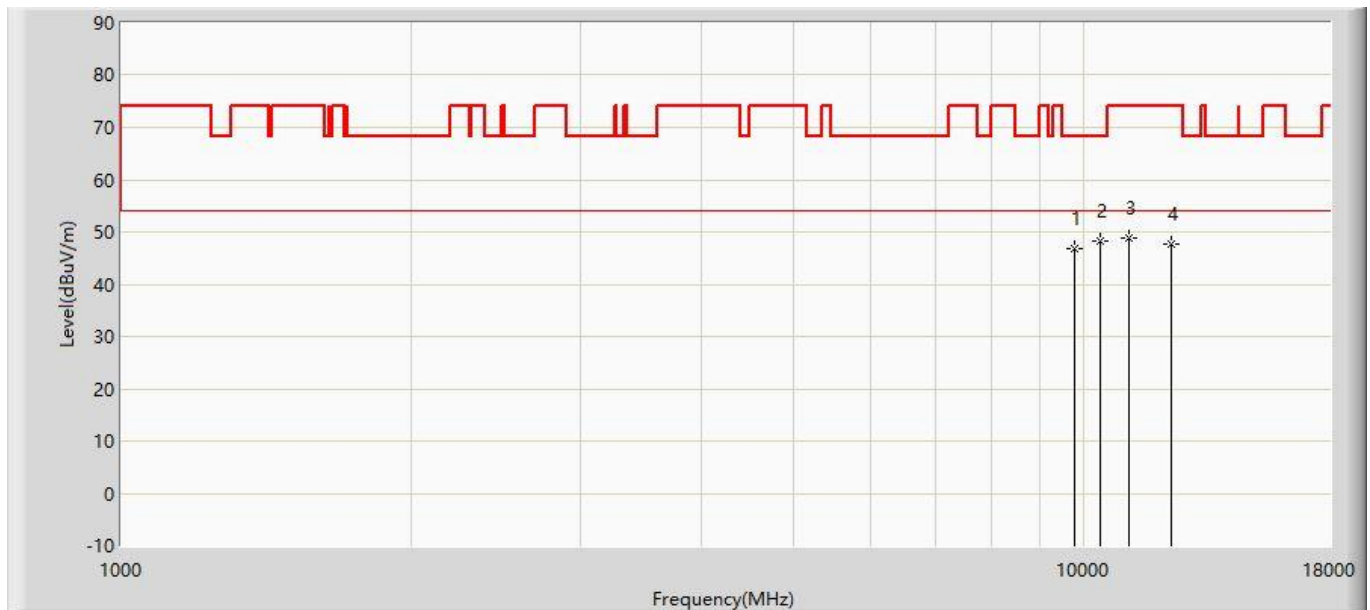


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9763.500	46.746	32.262	-21.454	68.200	14.485	PK
2		*	10392.500	48.262	31.739	-19.938	68.200	16.524	PK
3			11149.000	48.955	31.235	-25.045	74.000	17.720	PK
4			12296.500	47.769	29.958	-26.231	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with OAW-AP1361 (CDD Mode)	

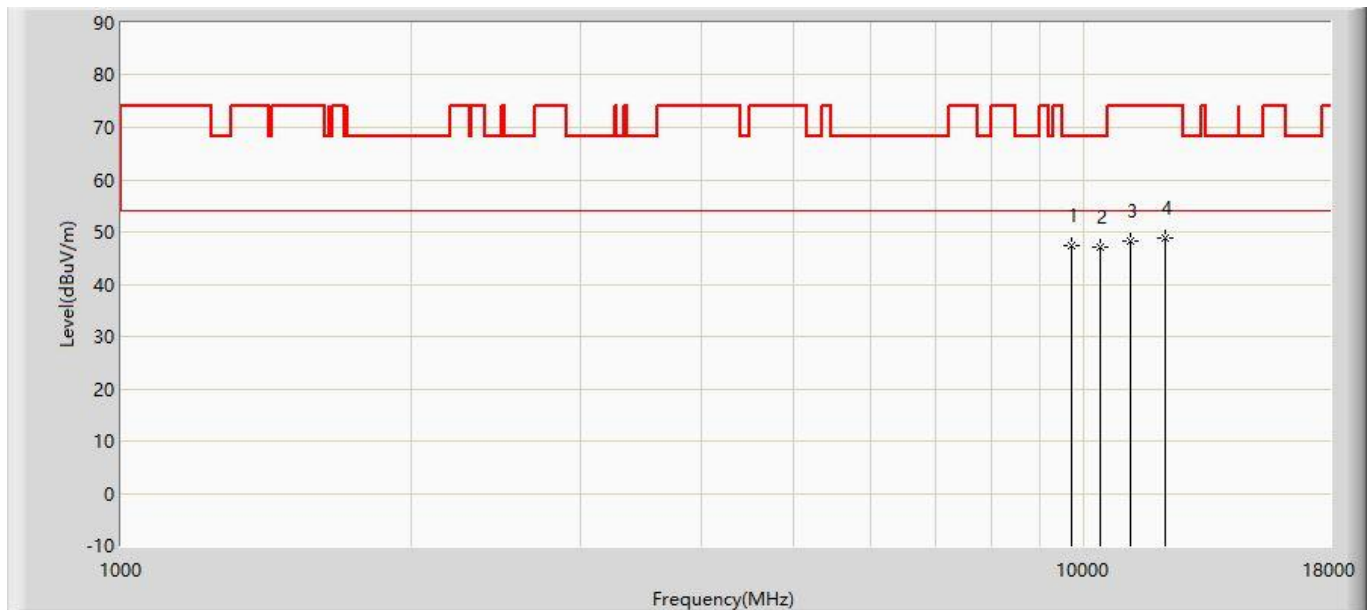


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	9704.000	47.371	33.082	-20.829	68.200	14.289	PK
2			10375.500	47.080	30.611	-21.120	68.200	16.470	PK
3			11157.500	48.317	30.589	-25.683	74.000	17.728	PK
4			12135.000	48.704	30.888	-25.296	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz with OAW-AP1361 (CDD Mode)	

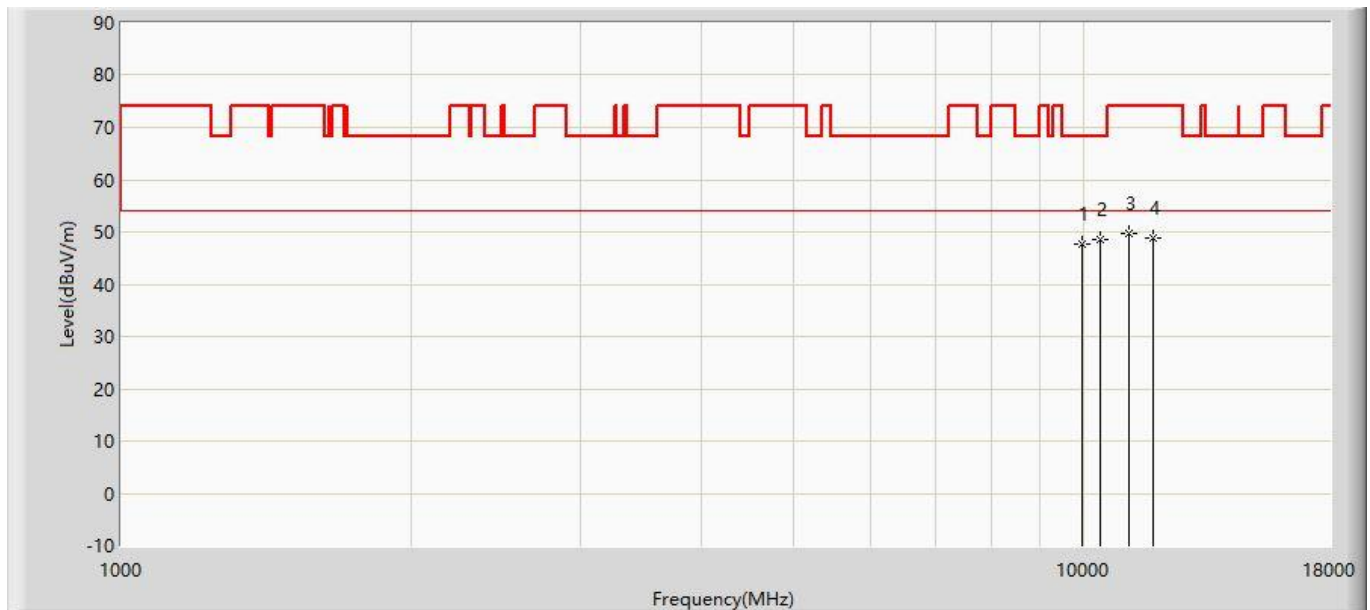


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9967.500	47.763	32.609	-20.437	68.200	15.154	PK
2		*	10409.500	48.591	32.012	-19.609	68.200	16.579	PK
3			11149.000	49.771	32.051	-24.229	74.000	17.720	PK
4			11786.500	48.883	30.964	-25.117	74.000	17.918	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with OAW-AP1361 (CDD Mode)	

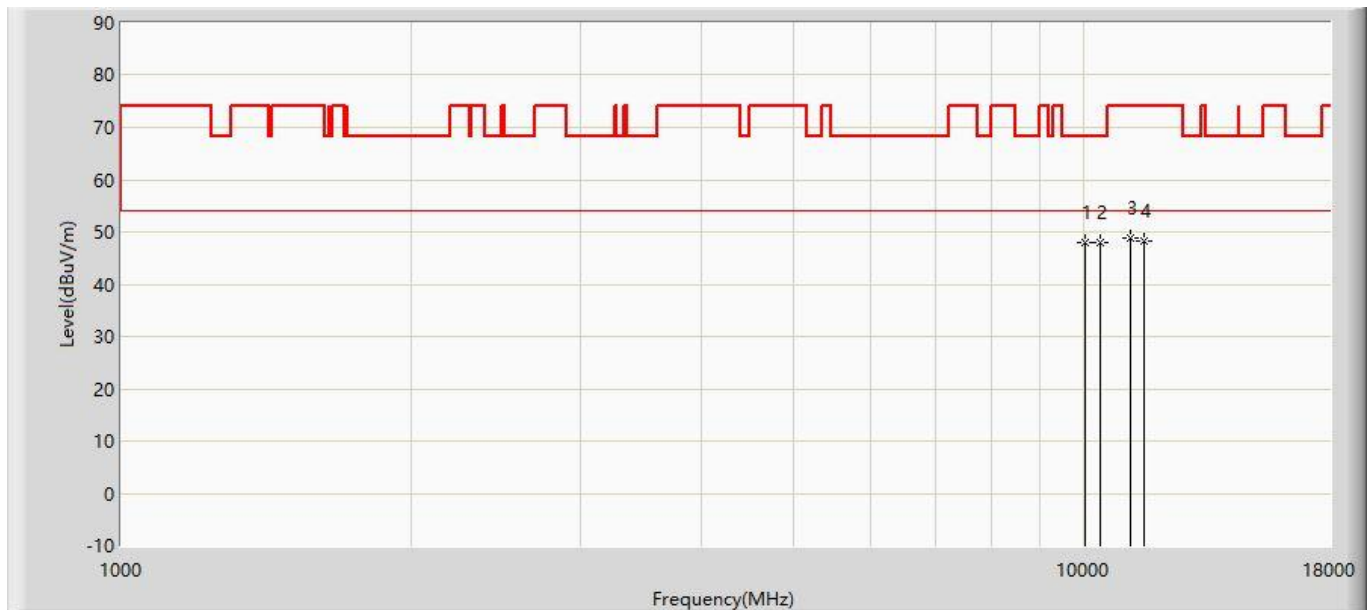


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			10018.500	47.925	32.606	-20.275	68.200	15.318	PK
2		*	10401.000	47.970	31.419	-20.230	68.200	16.551	PK
3			11183.000	48.921	31.169	-25.079	74.000	17.752	PK
4			11540.000	48.324	30.292	-25.676	74.000	18.032	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz with OAW-AP1361 (CDD Mode)	

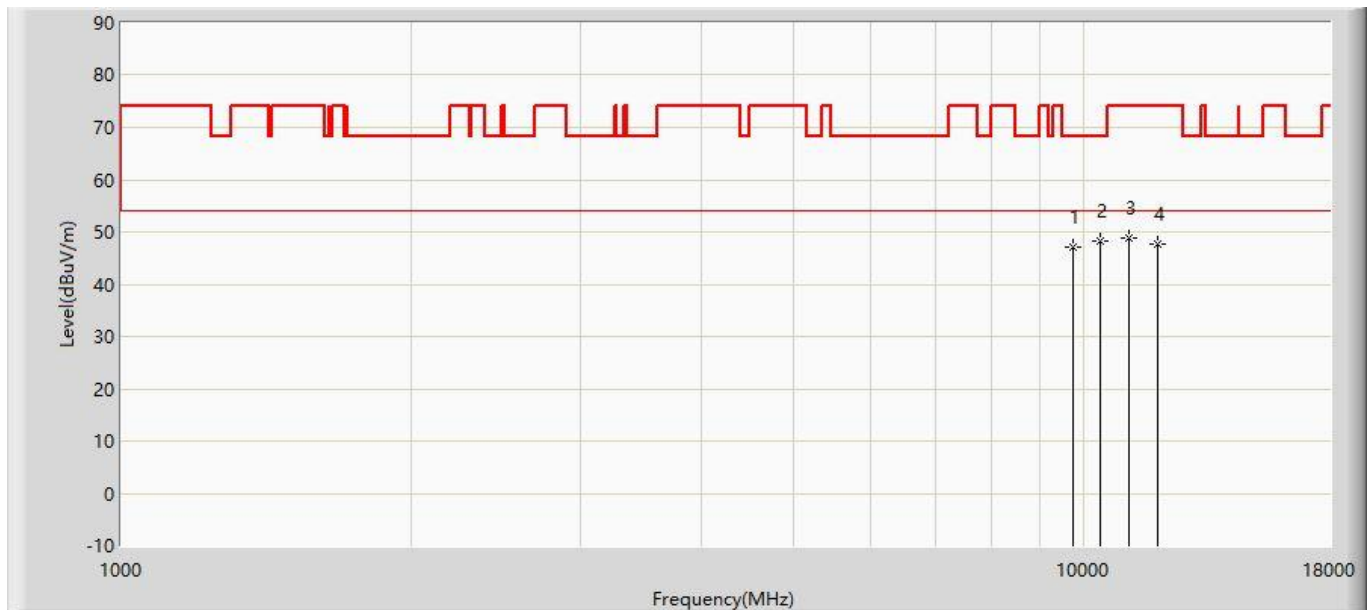


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9729.500	47.045	32.672	-21.155	68.200	14.373	PK
2		*	10384.000	48.370	31.874	-19.830	68.200	16.496	PK
3			11132.000	48.719	31.015	-25.281	74.000	17.704	PK
4			11905.500	47.660	29.796	-26.340	74.000	17.863	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5600MHz with OAW-AP1361 (CDD Mode)	

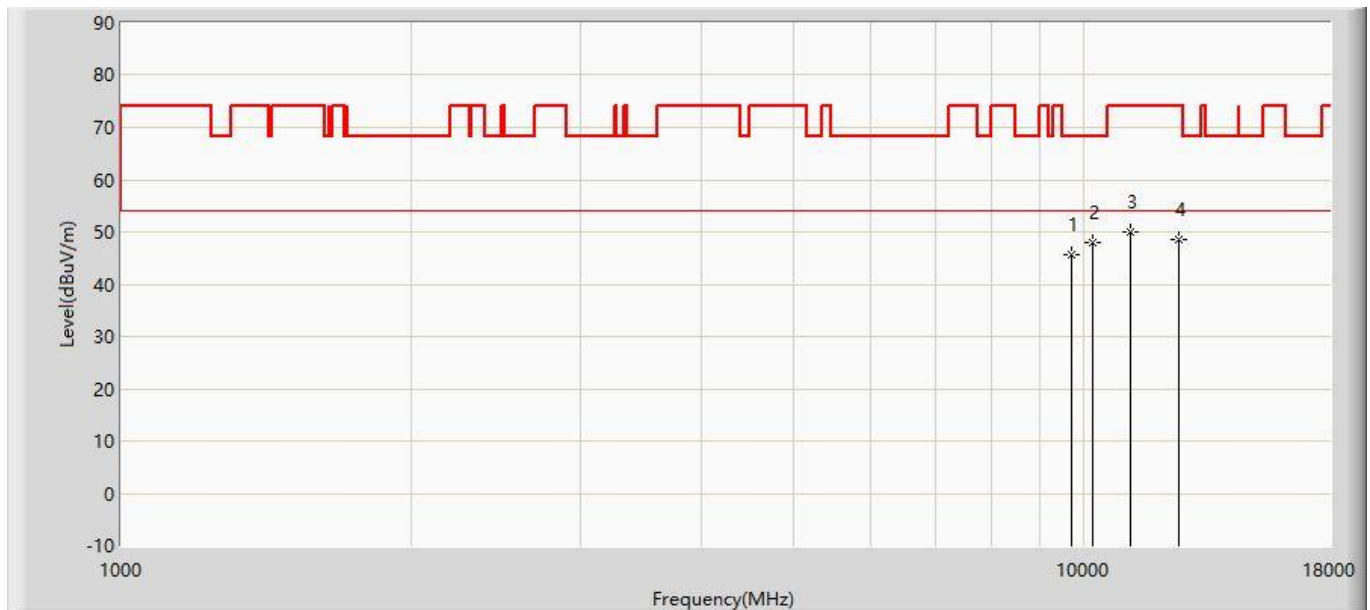


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9695.500	45.768	31.507	-22.432	68.200	14.261	PK
2		*	10214.000	47.992	32.043	-20.208	68.200	15.949	PK
3			11157.500	49.972	32.244	-24.028	74.000	17.728	PK
4			12534.500	48.414	30.520	-25.586	74.000	17.895	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5600MHz with OAW-AP1361 (CDD Mode)	

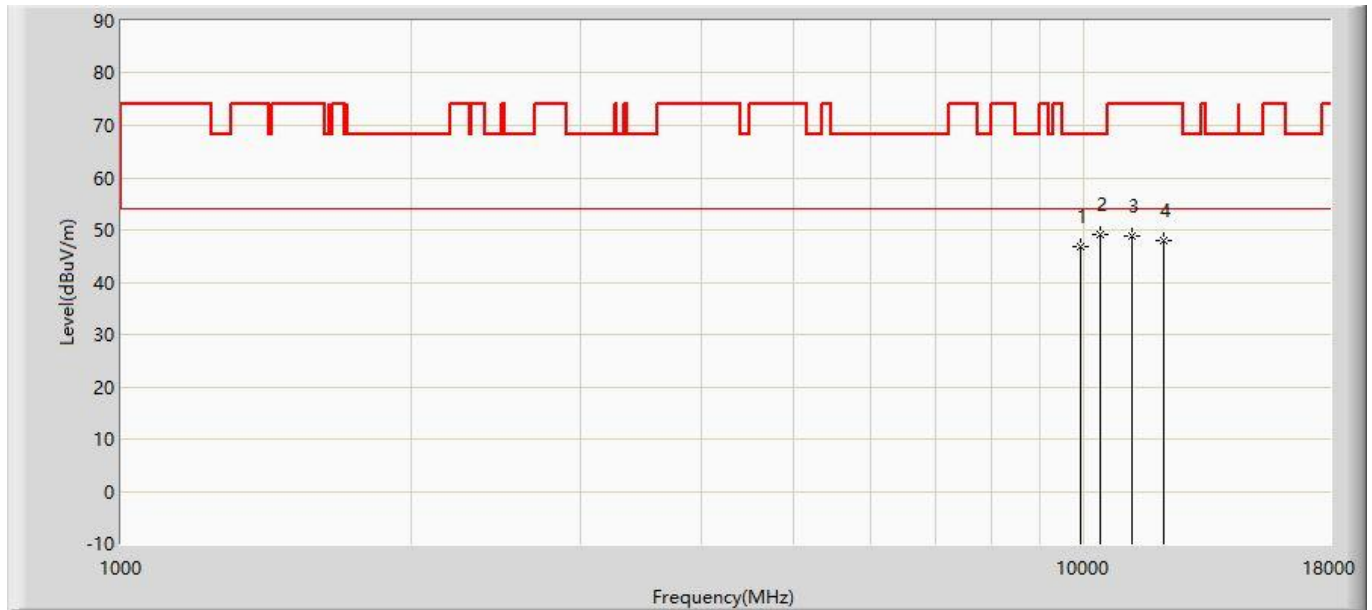


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9908.000	46.787	31.828	-21.413	68.200	14.959	PK
2		*	10392.500	49.023	32.500	-19.177	68.200	16.524	PK
3			11208.500	48.868	31.092	-25.132	74.000	17.777	PK
4			12109.500	48.042	30.226	-25.958	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz with OAW-AP1361 (CDD Mode)	

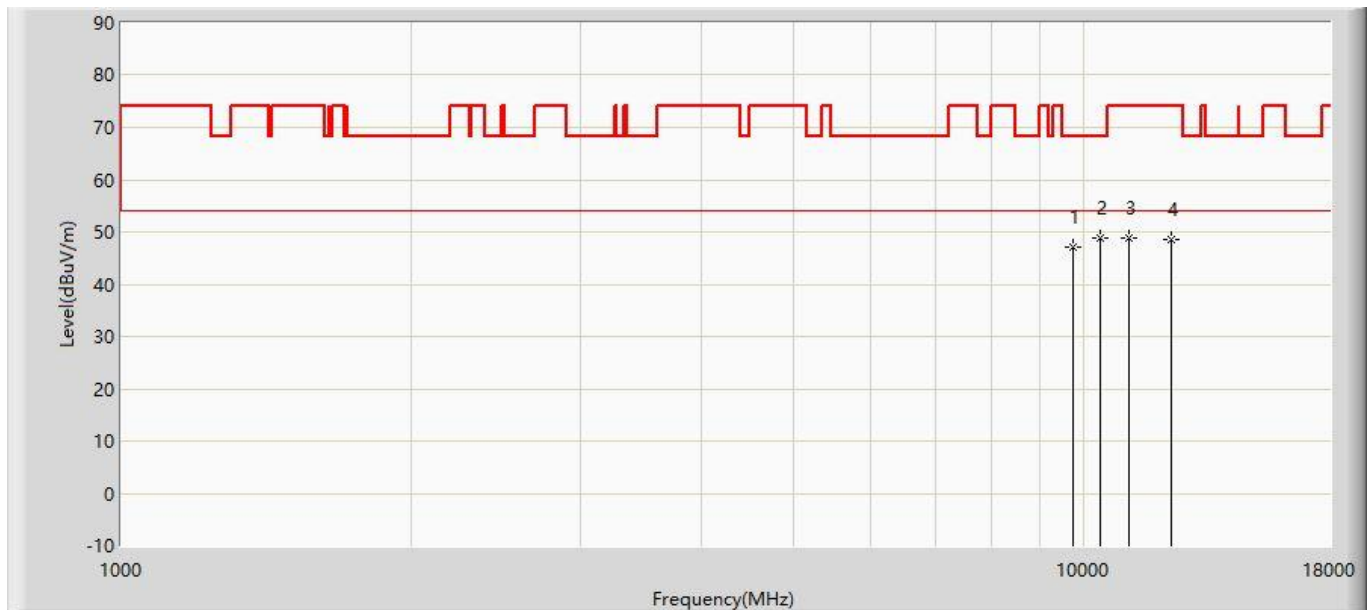


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9738.000	47.121	32.720	-21.079	68.200	14.401	PK
2		*	10401.000	48.723	32.172	-19.477	68.200	16.551	PK
3			11149.000	48.898	31.178	-25.102	74.000	17.720	PK
4			12296.500	48.462	30.651	-25.538	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz with OAW-AP1361 (CDD Mode)	

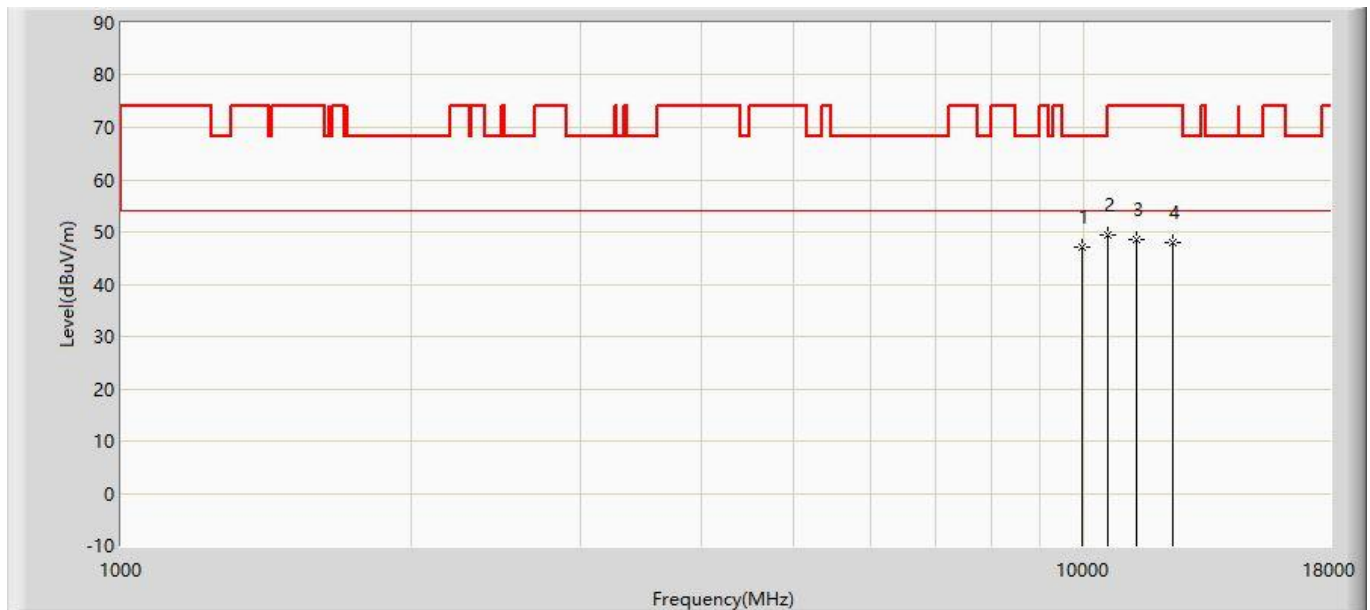


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9942.000	47.045	31.976	-21.155	68.200	15.069	PK
2		*	10571.000	49.290	32.319	-18.910	68.200	16.971	PK
3			11319.000	48.680	30.800	-25.320	74.000	17.880	PK
4			12381.500	47.974	30.165	-26.026	74.000	17.808	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5720MHz with OAW-AP1361 (CDD Mode)	

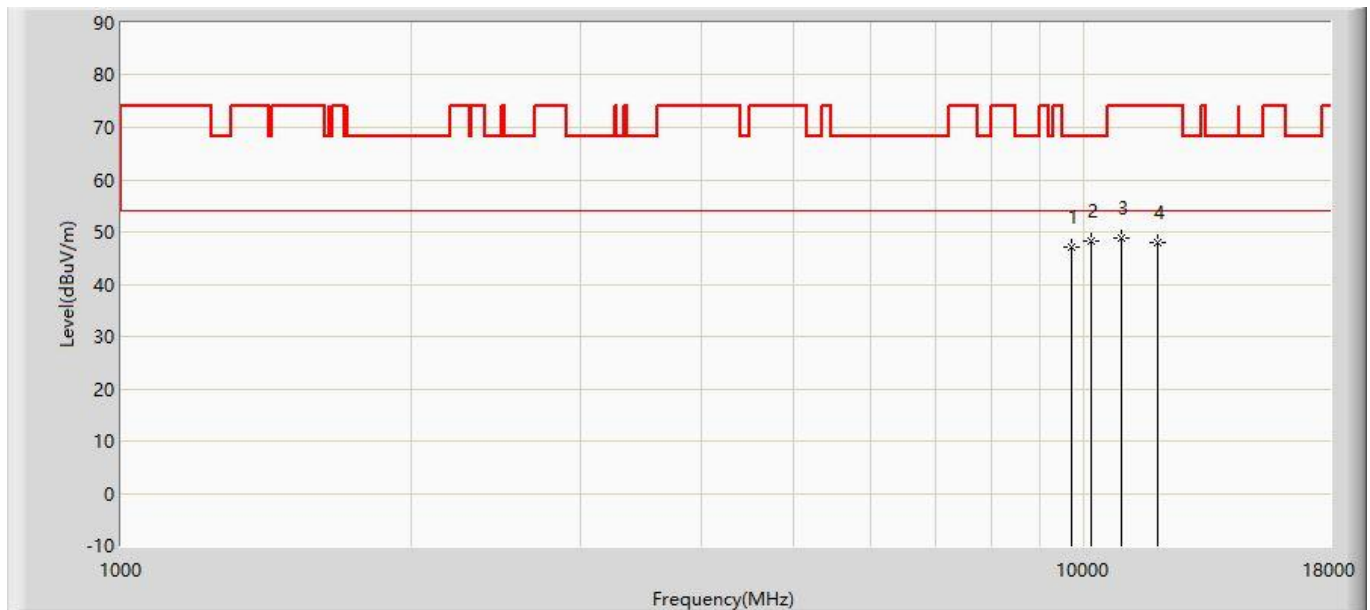


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9704.000	47.090	32.801	-21.110	68.200	14.289	PK
2		*	10163.000	48.376	32.591	-19.824	68.200	15.785	PK
3			10919.500	48.959	31.493	-25.041	74.000	17.465	PK
4			11931.000	48.047	30.196	-25.953	74.000	17.851	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5720MHz with OAW-AP1361 (CDD Mode)	

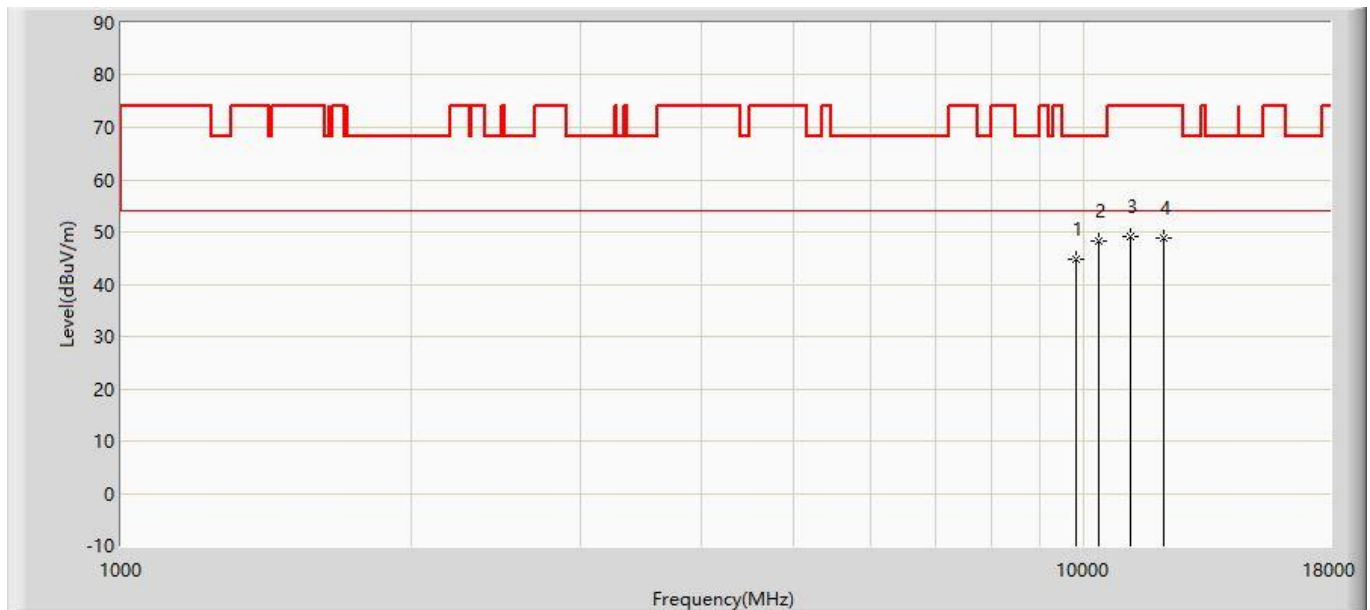


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9814.500	44.657	30.005	-23.543	68.200	14.652	PK
2		*	10358.500	48.120	31.706	-20.080	68.200	16.414	PK
3			11157.500	49.023	31.295	-24.977	74.000	17.728	PK
4			12118.000	48.769	30.953	-25.231	74.000	17.816	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz with OAW-AP1361 (CDD Mode)	

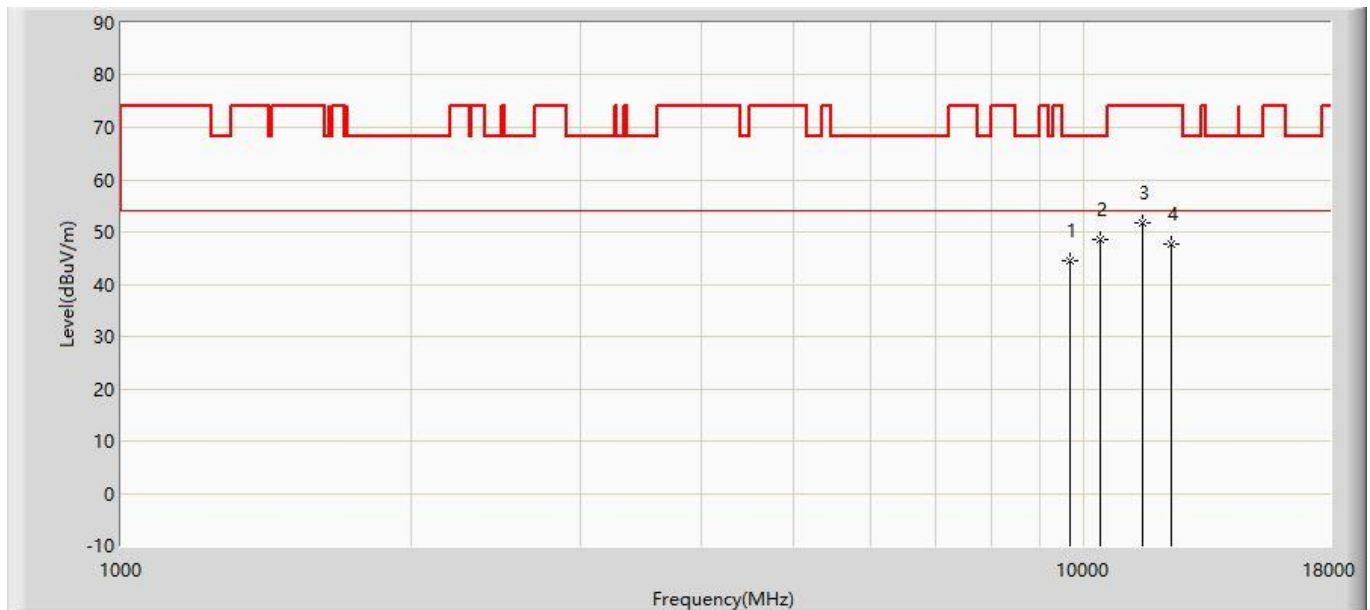


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9678.500	44.578	30.373	-23.622	68.200	14.205	PK
2		*	10392.500	48.492	31.969	-19.708	68.200	16.524	PK
3			11489.000	51.768	33.728	-22.232	74.000	18.040	PK
4			12296.500	47.771	29.960	-26.229	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz with OAW-AP1361 (CDD Mode)	

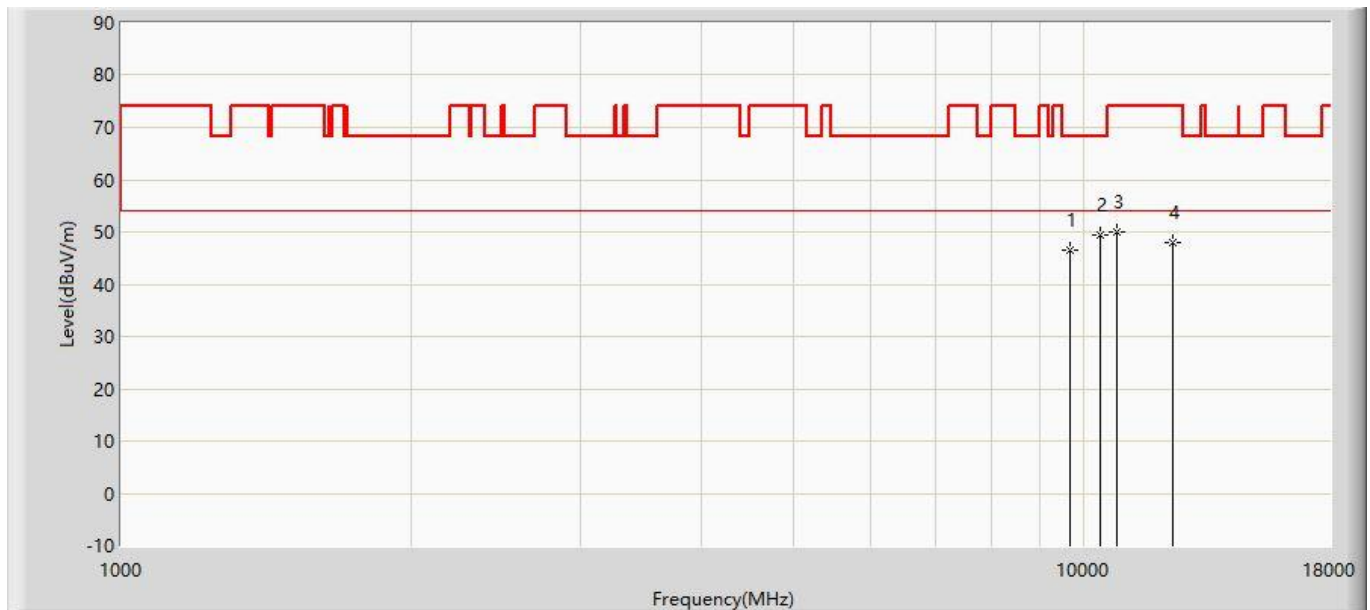


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9653.000	46.380	32.258	-21.820	68.200	14.122	PK
2		*	10392.500	49.304	32.781	-18.896	68.200	16.524	PK
3			10809.000	50.030	32.722	-23.970	74.000	17.308	PK
4			12364.500	48.006	30.197	-25.994	74.000	17.810	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5785MHz with OAW-AP1361 (CDD Mode)	

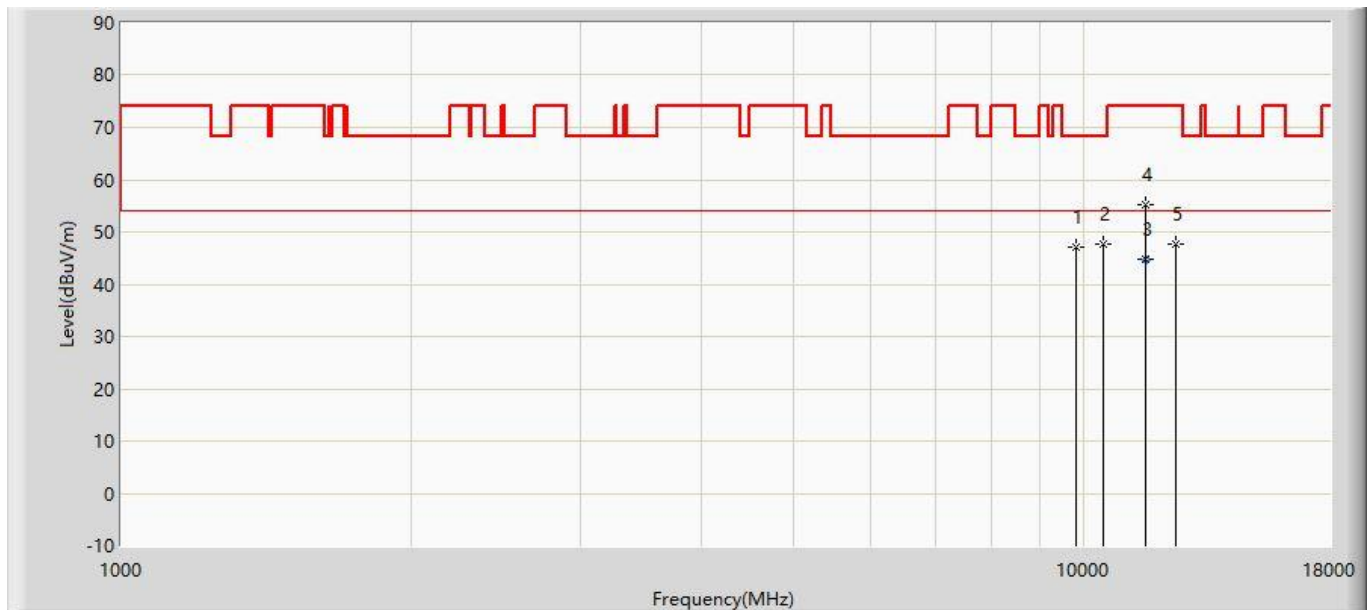


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9814.500	47.005	32.353	-21.195	68.200	14.652	PK
2			10452.000	47.619	30.904	-20.581	68.200	16.715	PK
3		*	11569.500	44.720	26.702	-9.280	54.000	18.017	AV
4			11574.000	55.267	37.251	-18.733	74.000	18.016	PK
5			12449.500	47.817	30.011	-26.183	74.000	17.806	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5785MHz with OAW-AP1361 (CDD Mode)	

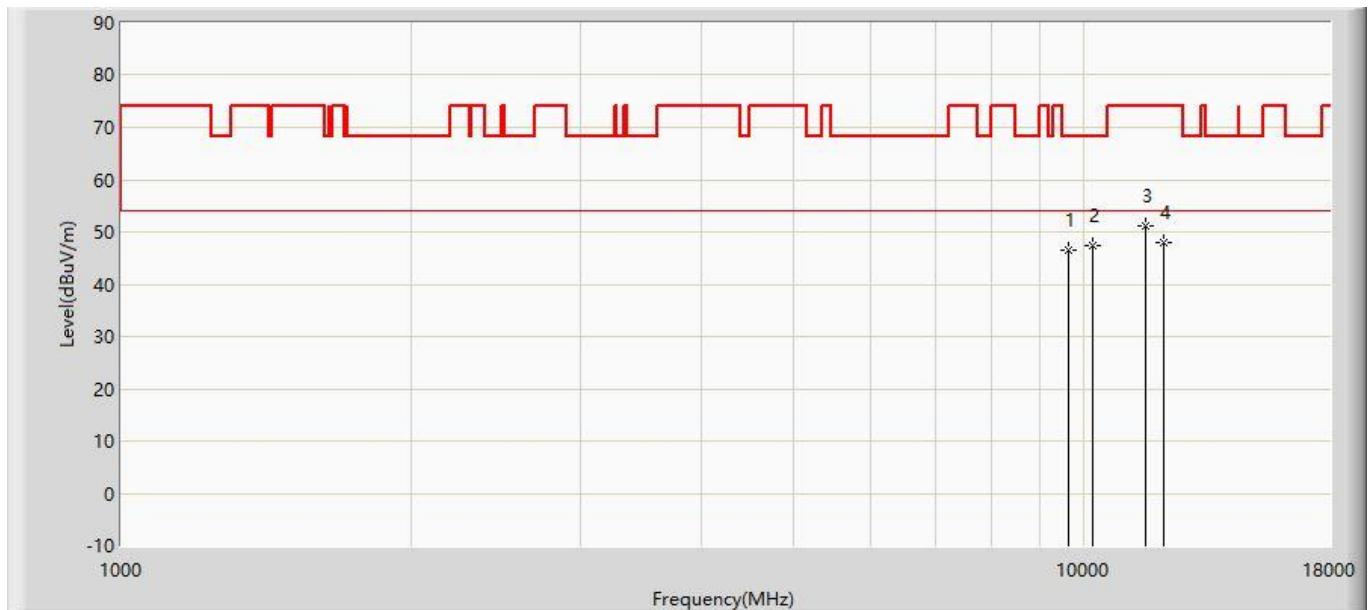


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9627.500	46.385	32.347	-21.815	68.200	14.038	PK
2		*	10197.000	47.306	31.412	-20.894	68.200	15.894	PK
3			11565.500	51.160	33.140	-22.840	74.000	18.020	PK
4			12109.500	48.017	30.201	-25.983	74.000	17.816	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz with OAW-AP1361 (CDD Mode)	

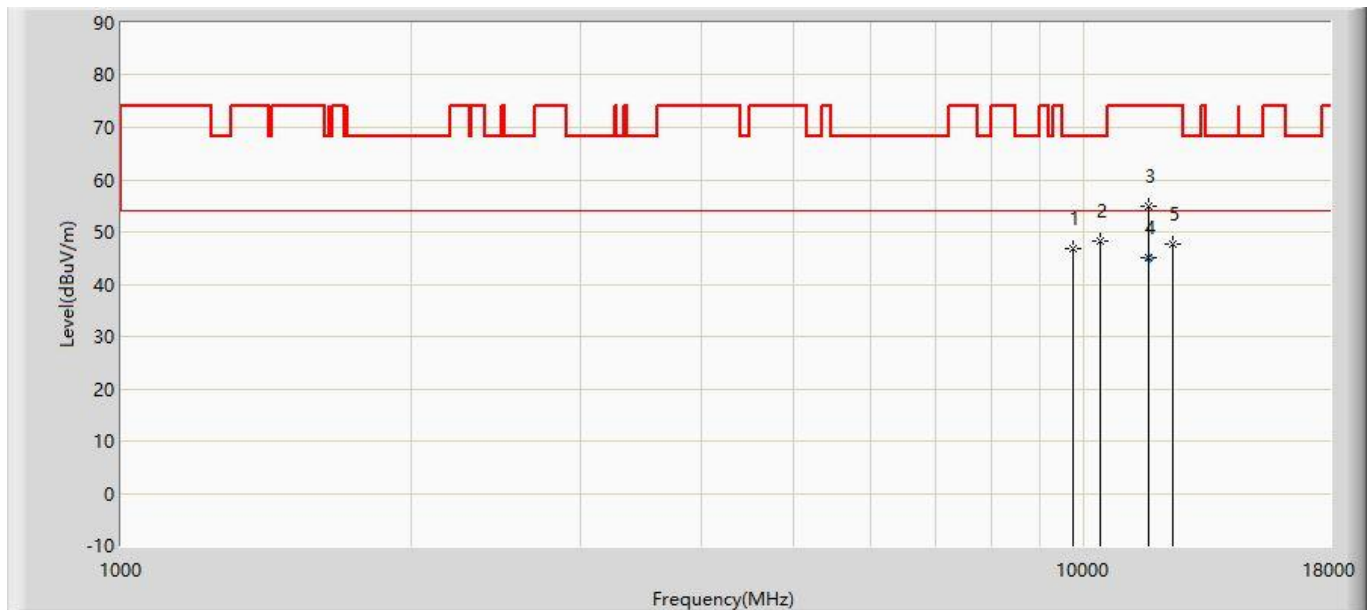


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9738.000	46.725	32.324	-21.475	68.200	14.401	PK
2			10409.500	48.361	31.782	-19.839	68.200	16.579	PK
3			11650.500	54.820	36.839	-19.180	74.000	17.981	PK
4		*	11651.080	45.202	27.221	-8.798	54.000	17.981	AV
5			12356.000	47.619	29.810	-26.381	74.000	17.809	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz with OAW-AP1361 (CDD Mode)	

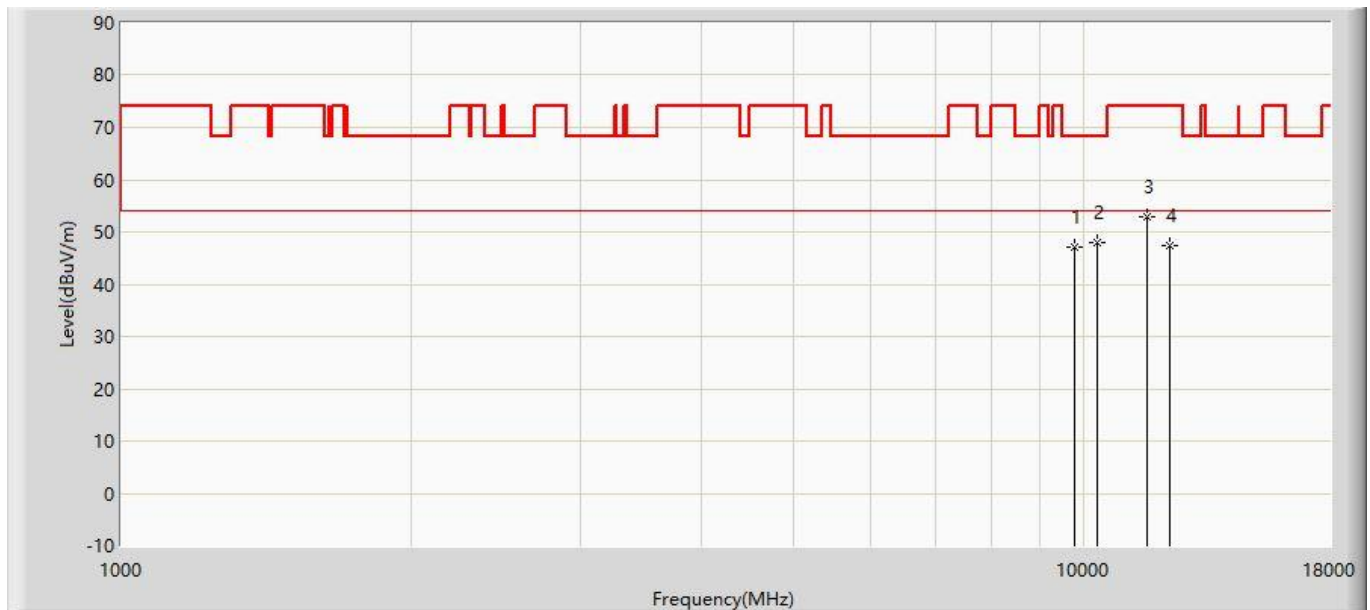


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9772.000	47.158	32.646	-21.042	68.200	14.512	PK
2		*	10324.500	47.883	31.578	-20.317	68.200	16.305	PK
3			11642.000	52.775	34.790	-21.225	74.000	17.985	PK
4			12279.500	47.418	29.607	-26.582	74.000	17.810	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz with OAW-AP1361 (CDD Mode)	

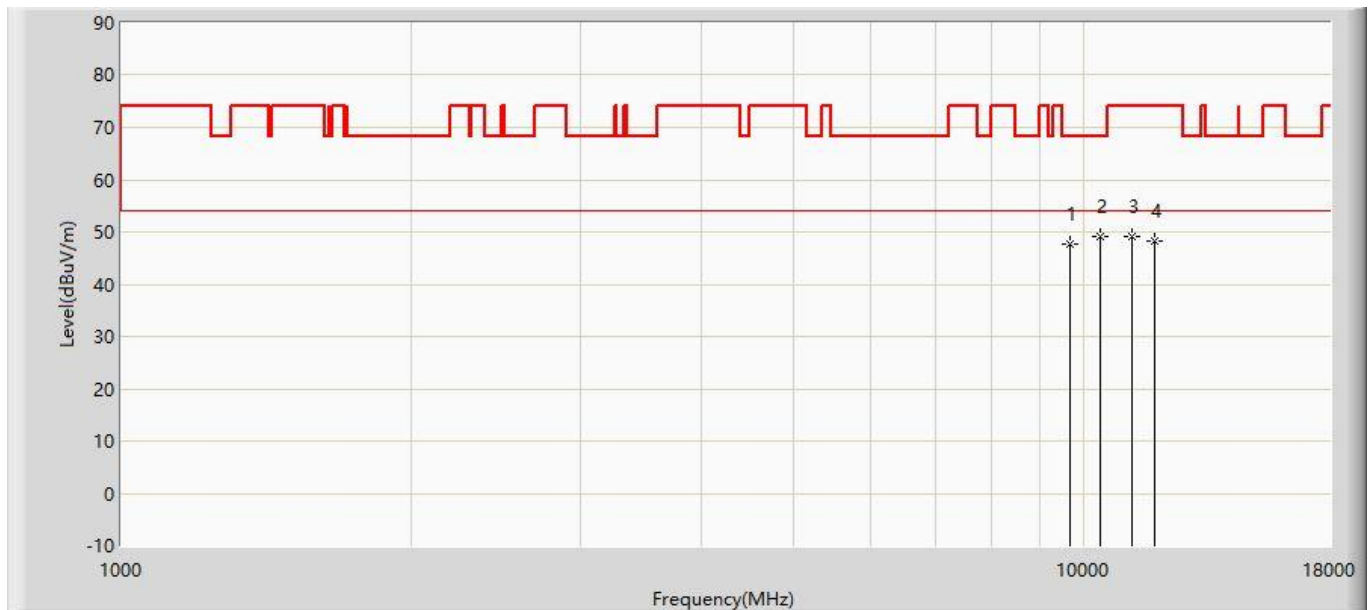


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9661.500	47.594	33.444	-20.606	68.200	14.151	PK
2		*	10409.500	49.228	32.649	-18.972	68.200	16.579	PK
3			11200.000	49.050	31.282	-24.950	74.000	17.768	PK
4			11829.000	48.380	30.481	-25.620	74.000	17.899	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz with OAW-AP1361 (CDD Mode)	

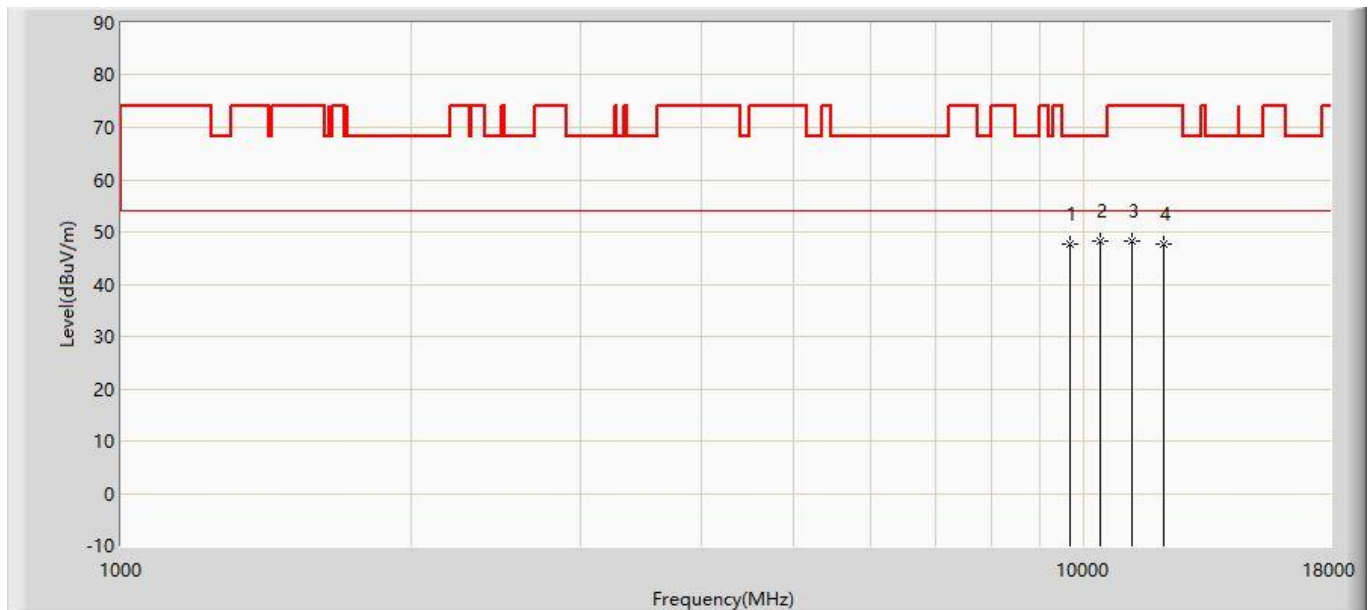


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9661.500	47.594	33.444	-20.606	68.200	14.151	PK
2		*	10392.500	48.249	31.726	-19.951	68.200	16.524	PK
3			11208.500	48.302	30.526	-25.698	74.000	17.777	PK
4			12075.500	47.640	29.822	-26.360	74.000	17.818	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5230MHz with OAW-AP1361 (CDD Mode)	

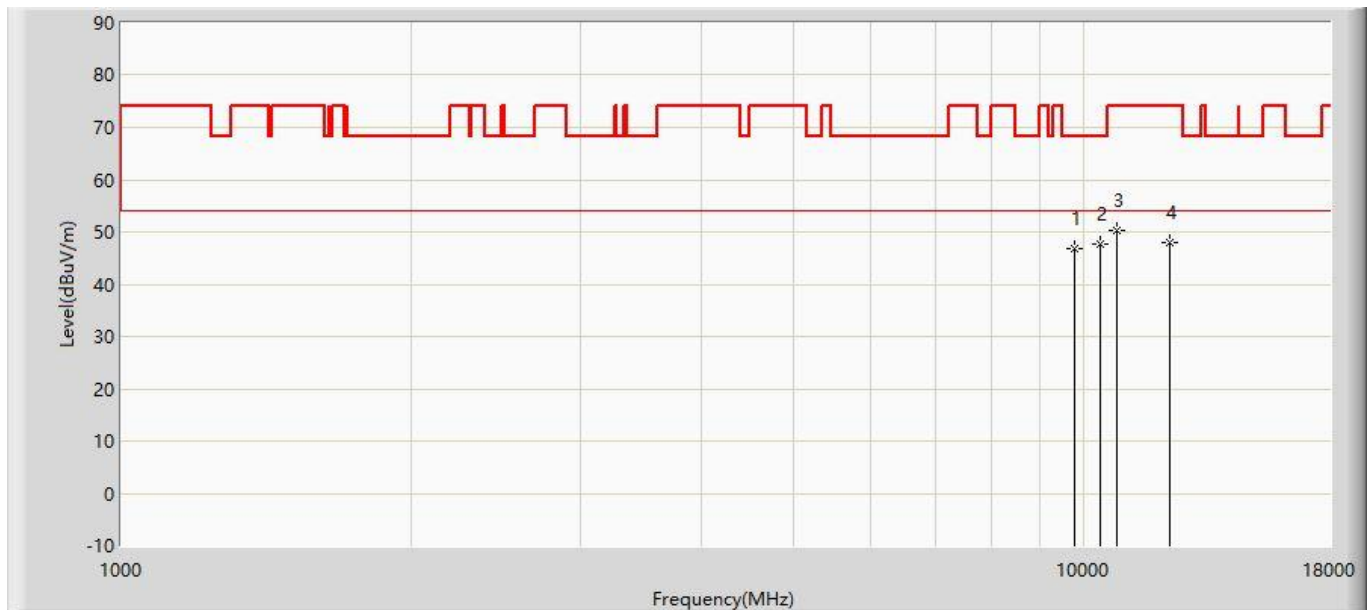


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9763.500	46.888	32.404	-21.312	68.200	14.485	PK
2		*	10401.000	47.739	31.188	-20.461	68.200	16.551	PK
3			10834.500	50.223	32.878	-23.777	74.000	17.345	PK
4			12288.000	48.070	30.259	-25.930	74.000	17.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5230MHz with OAW-AP1361 (CDD Mode)	

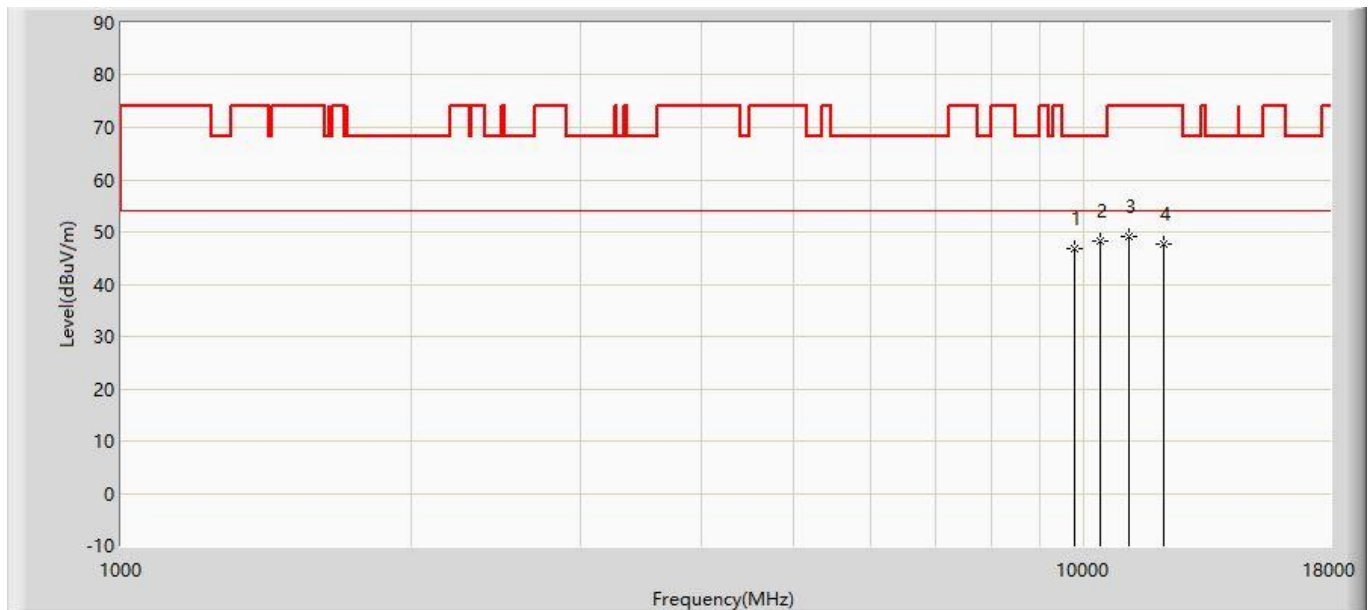


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9763.500	46.888	32.404	-21.312	68.200	14.485	PK
2		*	10392.500	48.273	31.750	-19.927	68.200	16.524	PK
3			11149.000	49.202	31.482	-24.798	74.000	17.720	PK
4			12092.500	47.723	29.906	-26.277	74.000	17.818	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5270MHz with OAW-AP1361 (CDD Mode)	

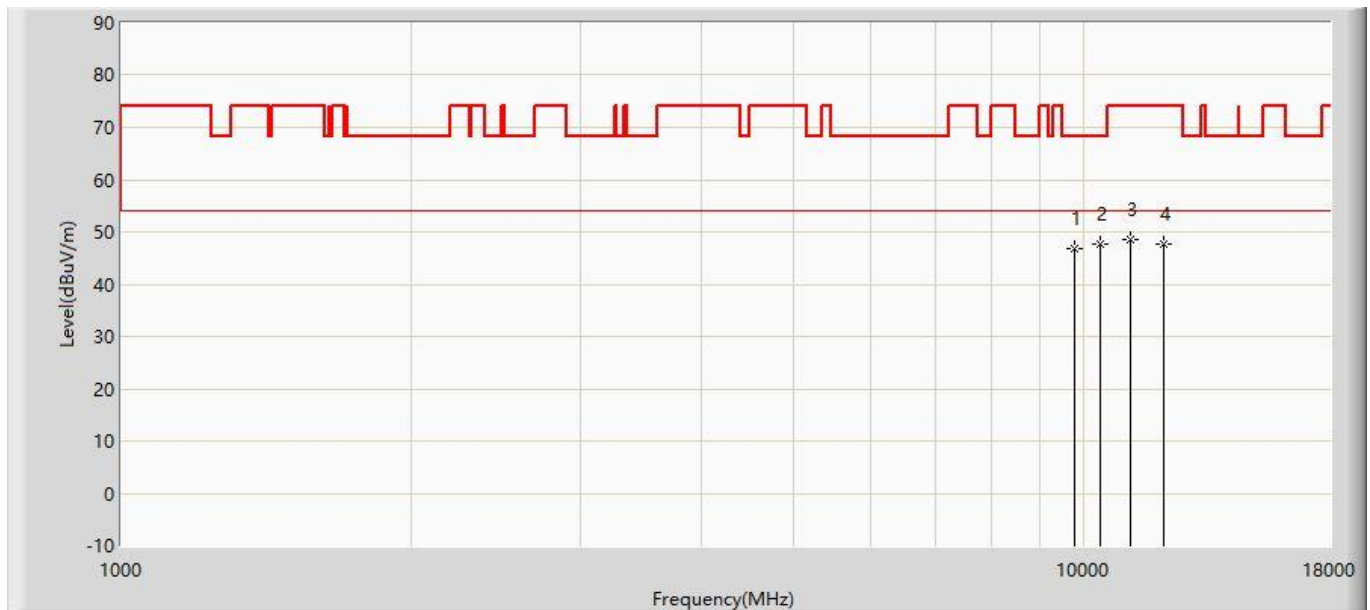


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9763.500	46.720	32.236	-21.480	68.200	14.485	PK
2		*	10401.000	47.618	31.067	-20.582	68.200	16.551	PK
3			11174.500	48.417	30.673	-25.583	74.000	17.743	PK
4			12092.500	47.723	29.906	-26.277	74.000	17.818	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5270MHz with OAW-AP1361 (CDD Mode)	

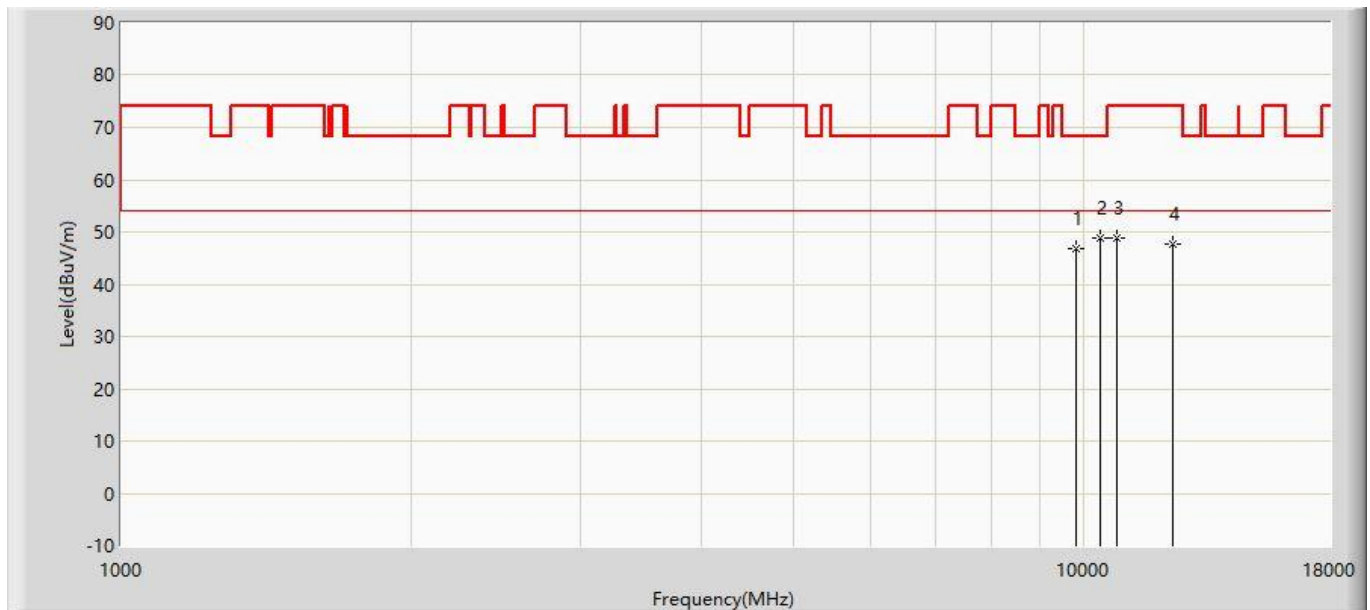


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9823.000	46.735	32.055	-21.465	68.200	14.680	PK
2		*	10401.000	48.940	32.389	-19.260	68.200	16.551	PK
3			10800.500	48.870	31.573	-25.130	74.000	17.297	PK
4			12381.500	47.725	29.916	-26.275	74.000	17.808	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz with OAW-AP1361 (CDD Mode)	

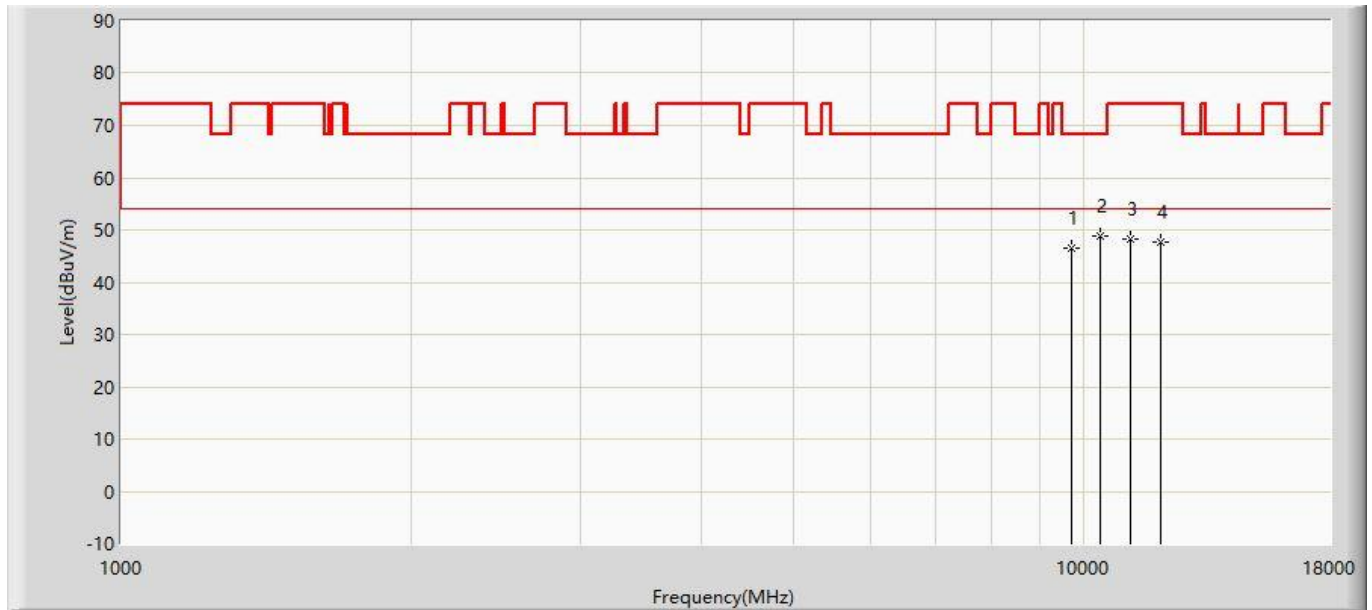


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9712.500	46.494	32.177	-21.706	68.200	14.316	PK
2		*	10375.500	48.744	32.275	-19.456	68.200	16.470	PK
3			11191.500	48.393	30.633	-25.607	74.000	17.760	PK
4			12016.000	47.541	29.722	-26.459	74.000	17.819	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz with OAW-AP1361 (CDD Mode)	

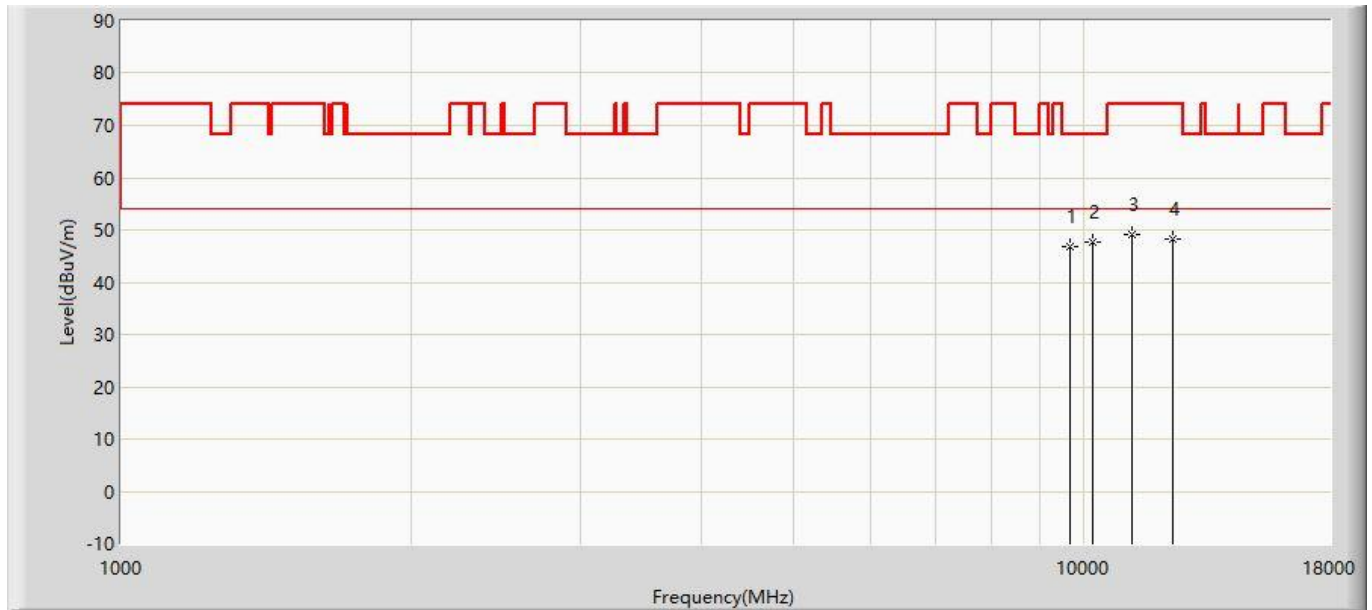


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9661.500	46.800	32.650	-21.400	68.200	14.151	PK
2		*	10214.000	47.553	31.604	-20.647	68.200	15.949	PK
3			11200.000	49.170	31.402	-24.830	74.000	17.768	PK
4			12381.500	48.221	30.412	-25.779	74.000	17.808	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Horizontal
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz with OAW-AP1361 (CDD Mode)	

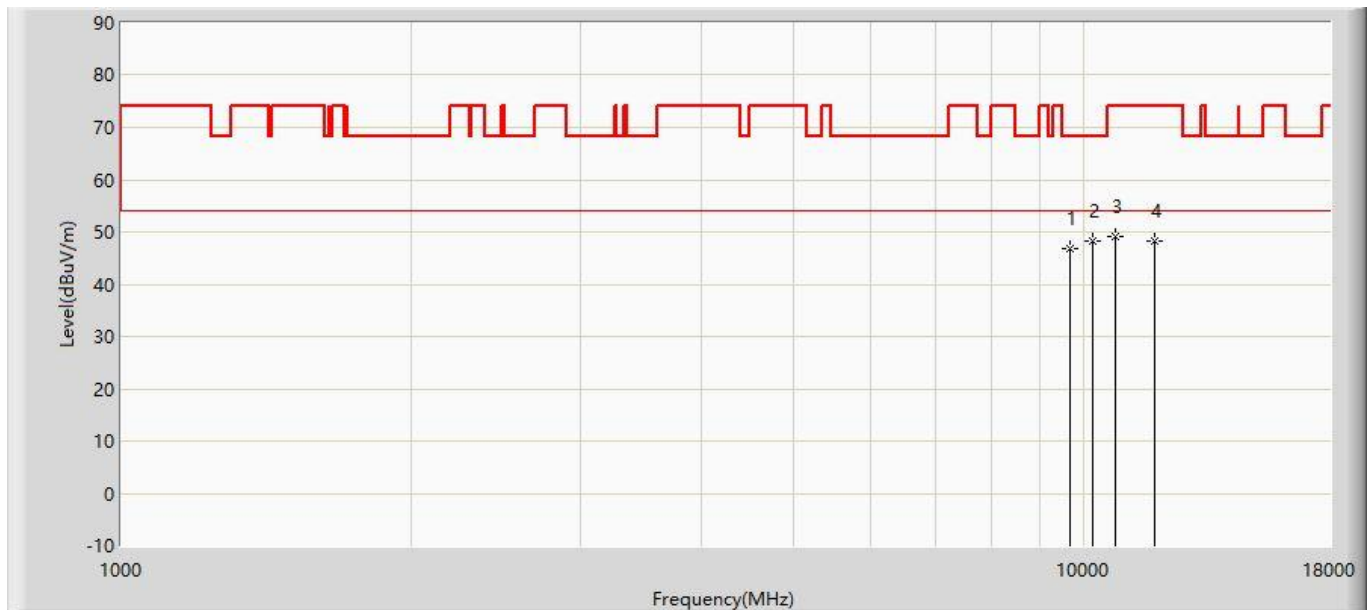


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9661.500	46.800	32.650	-21.400	68.200	14.151	PK
2		*	10214.000	48.183	32.234	-20.017	68.200	15.949	PK
3			10766.500	49.070	31.821	-24.930	74.000	17.249	PK
4			11829.000	48.239	30.340	-25.761	74.000	17.899	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2020/04/24 - 14:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA 9120D_1-18GHz	Polarity: Vertical
EUT: 無線基地台	Power: By PoE
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz with OAW-AP1361 (CDD Mode)	

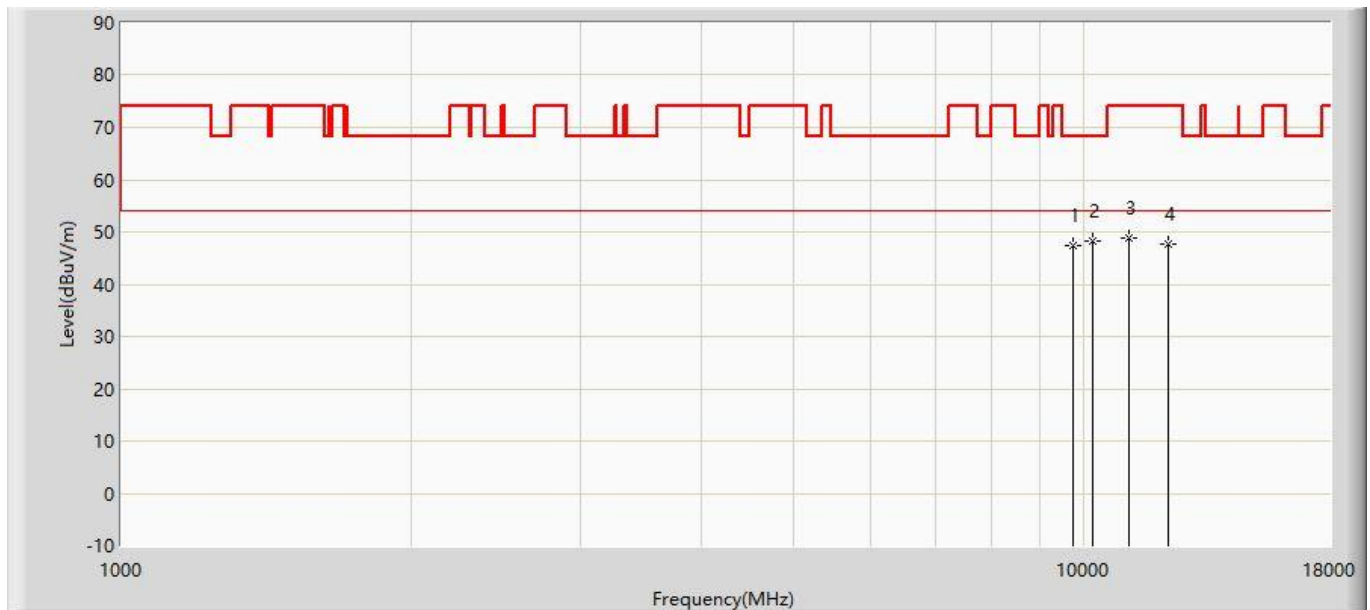

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			9738.000	47.295	32.894	-20.905	68.200	14.401	PK
2		*	10205.500	48.249	32.327	-19.951	68.200	15.922	PK
3			11140.500	48.916	31.203	-25.084	74.000	17.712	PK
4			12245.500	47.643	29.830	-26.357	74.000	17.813	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).