




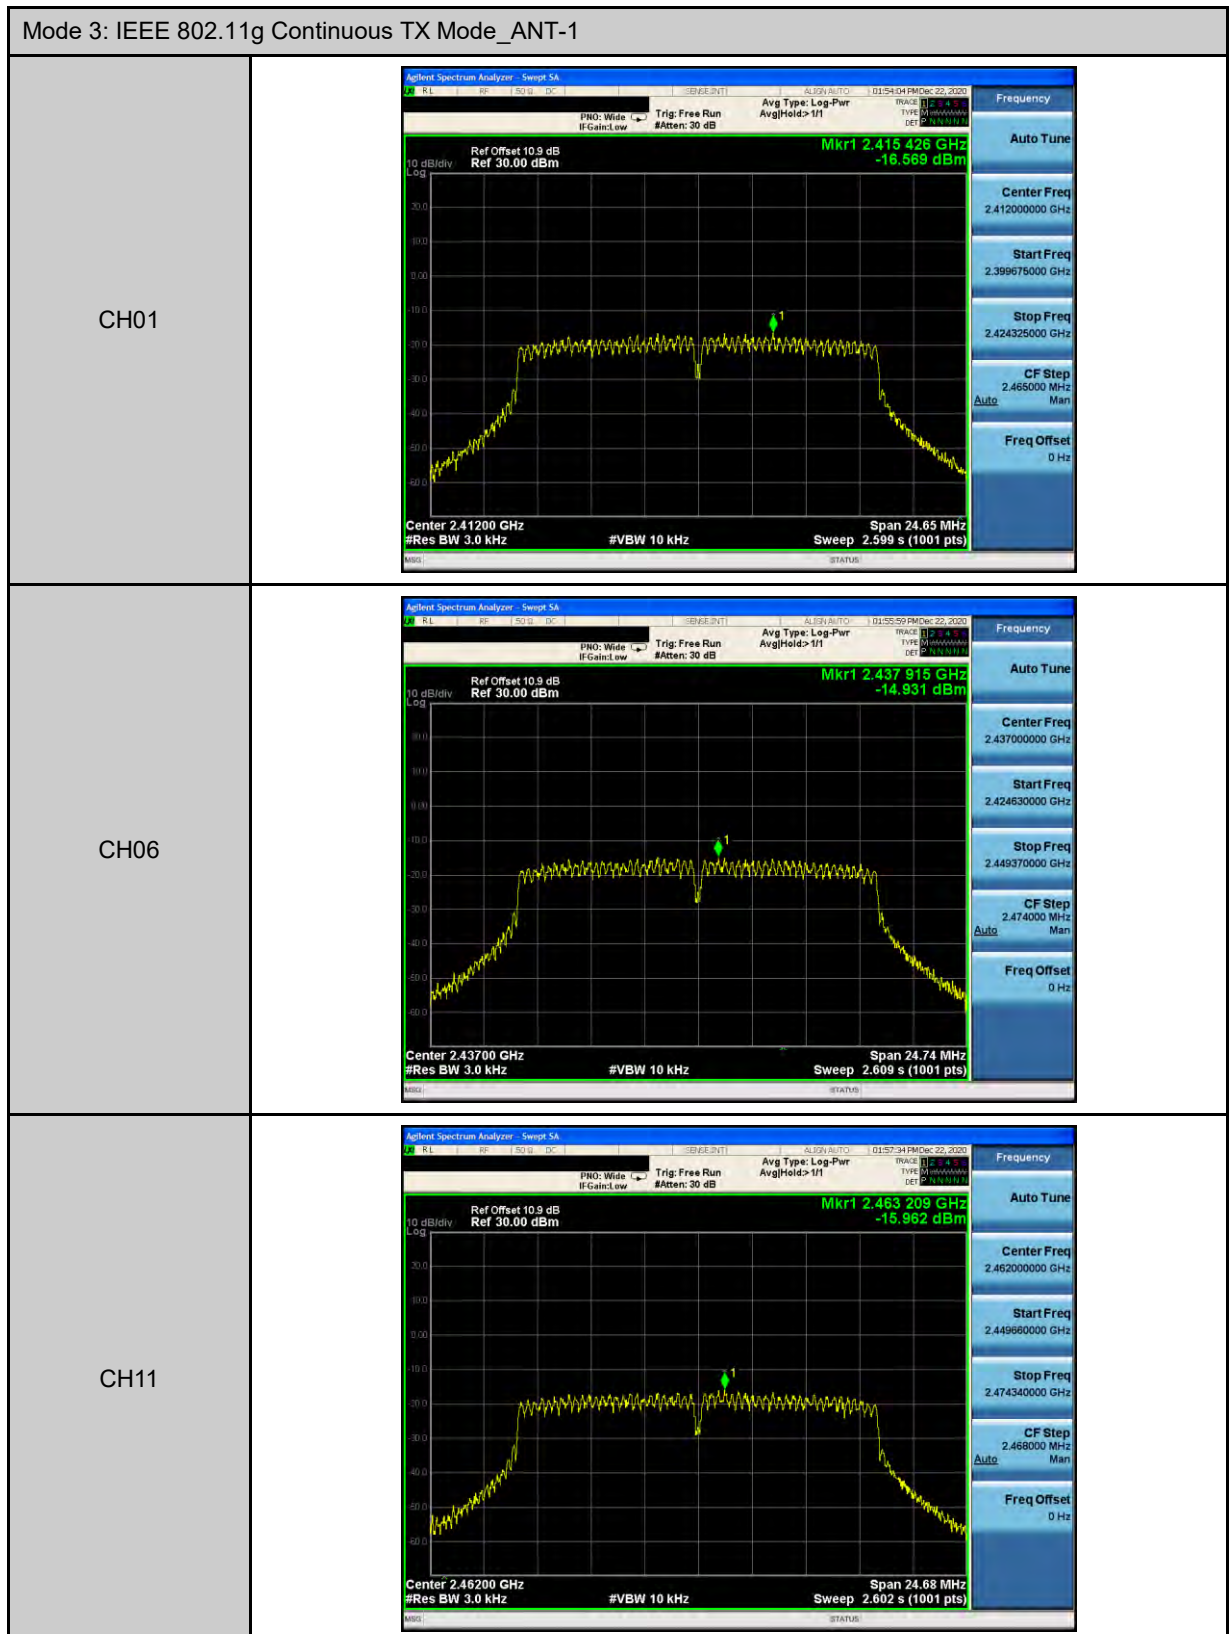

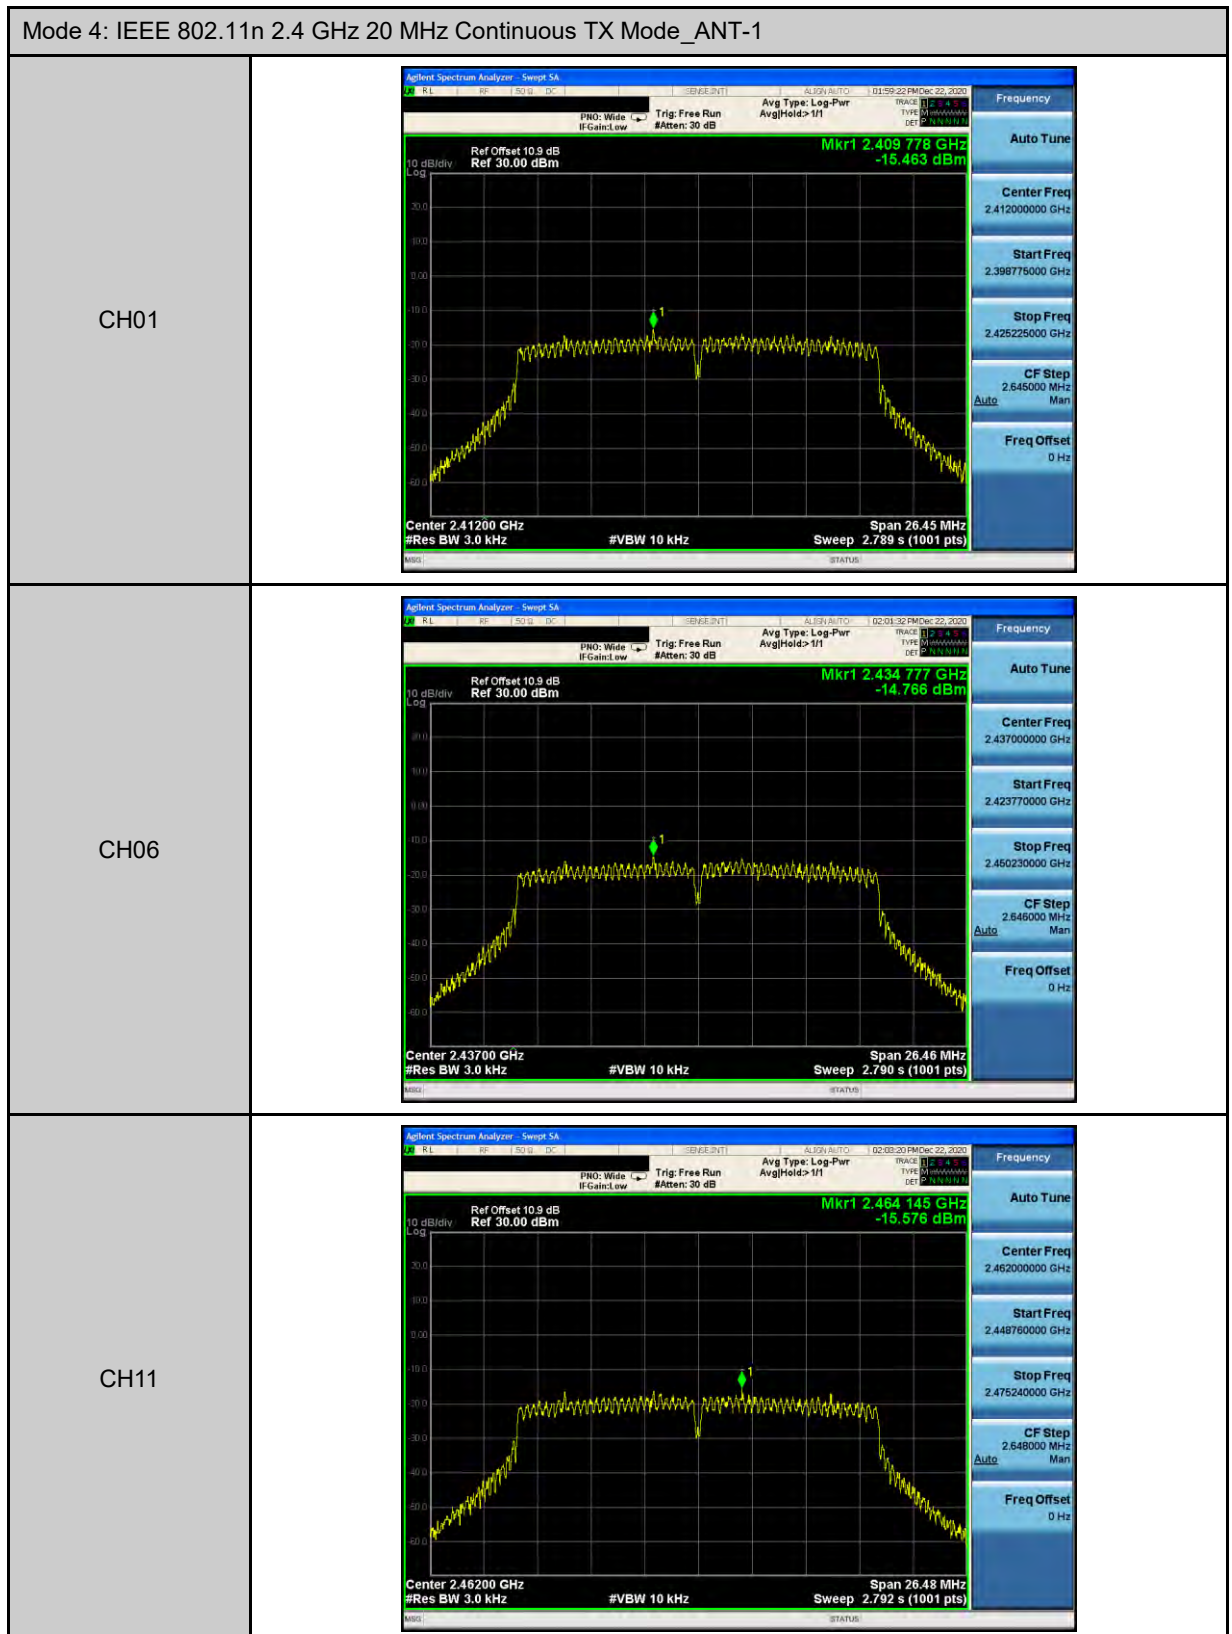


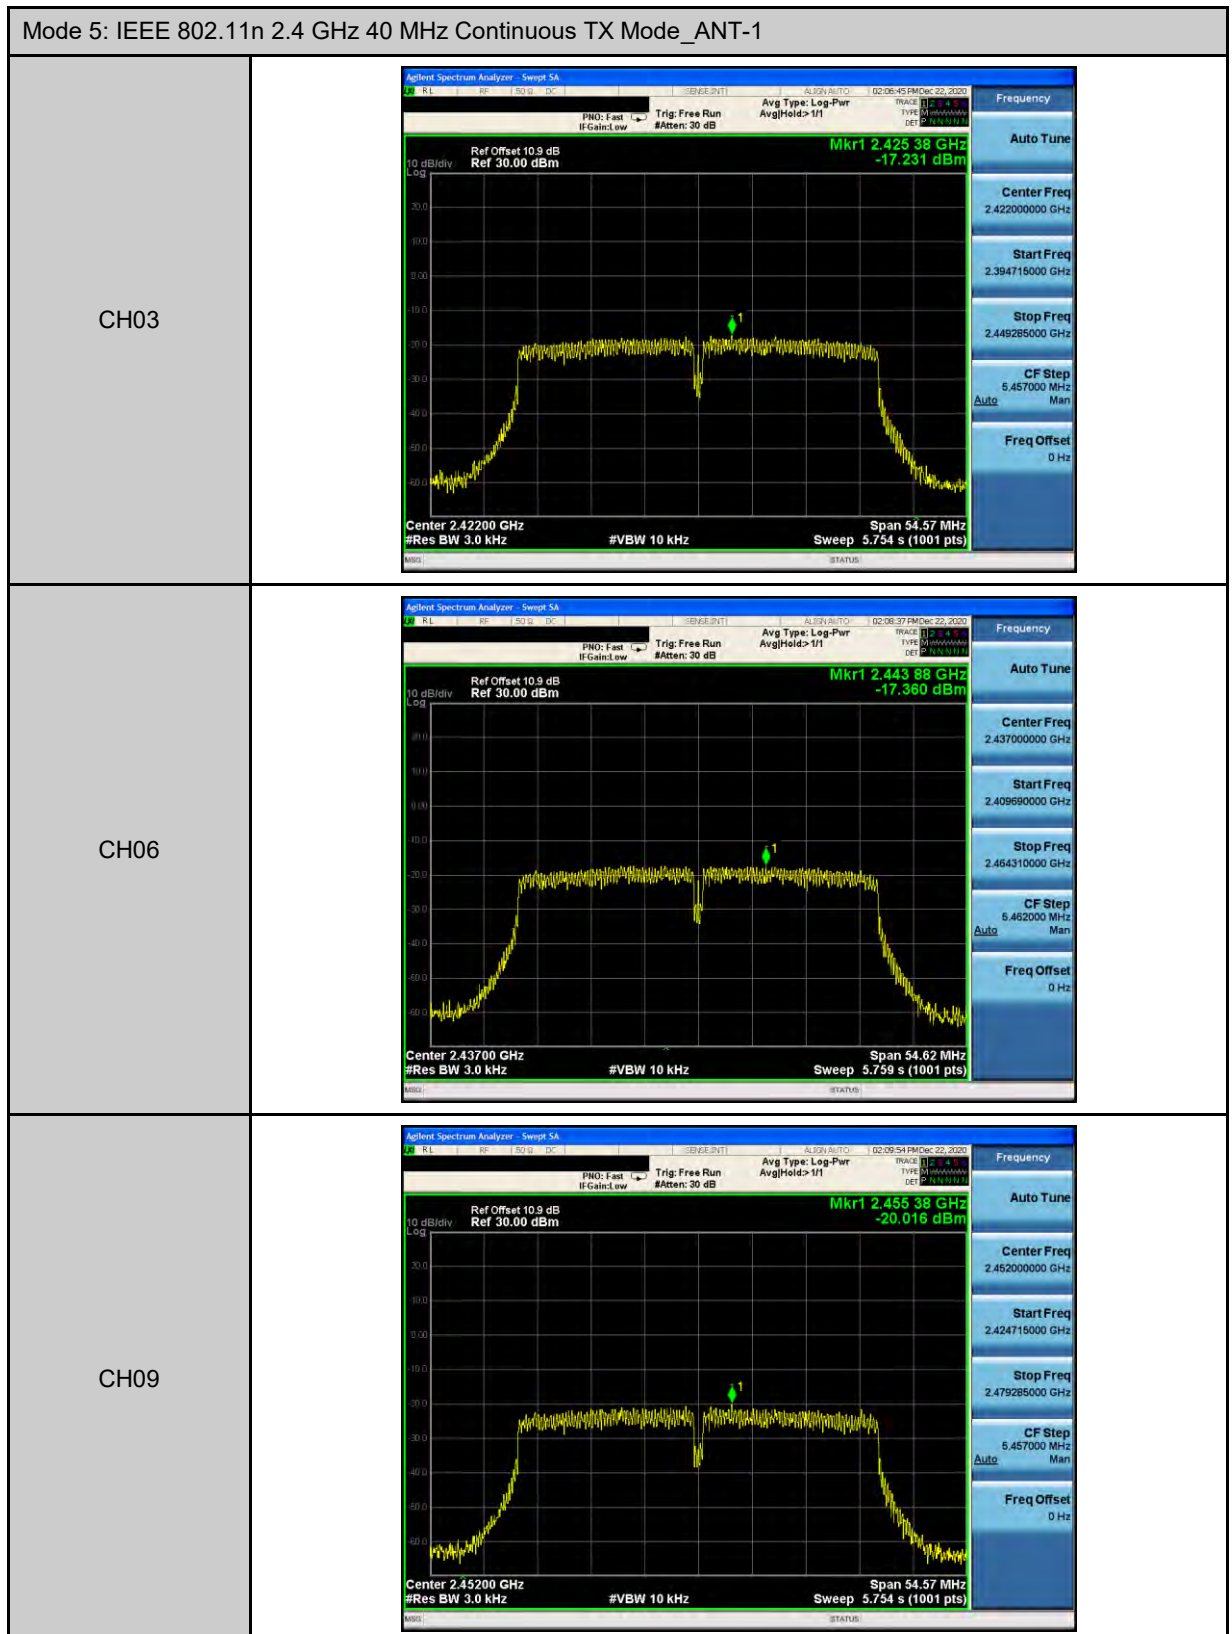

Annex D. Radiated Emission Measurement (5 GHz)

其它不必要之訊號 (1 GHz 以下)

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

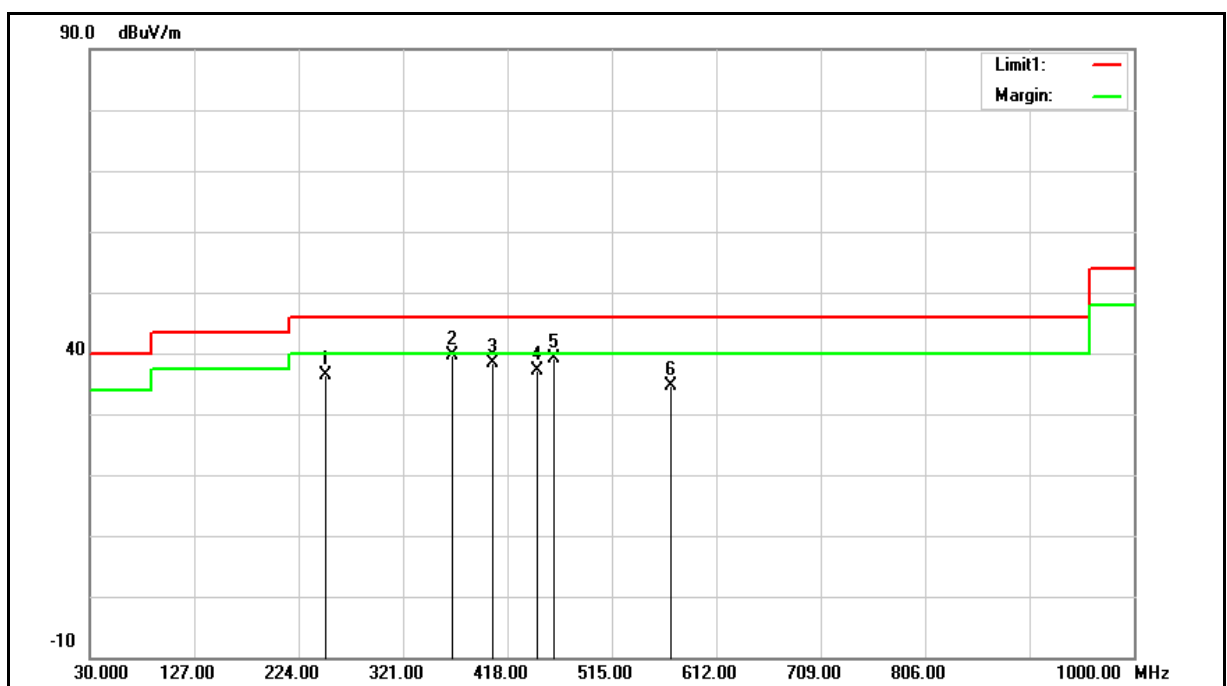

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	249.2200	61.81	-25.36	36.45	46.00	-9.55	QP
2	366.5900	61.70	-22.08	39.62	46.00	-6.38	QP
3	404.4200	59.67	-21.22	38.45	46.00	-7.55	QP
4	445.1600	57.54	-20.29	37.25	46.00	-8.75	QP
5	460.6800	59.14	-20.06	39.08	46.00	-6.92	QP
6	569.3200	52.59	-17.88	34.71	46.00	-11.29	QP


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 36.45 = -25.36 + 61.81

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

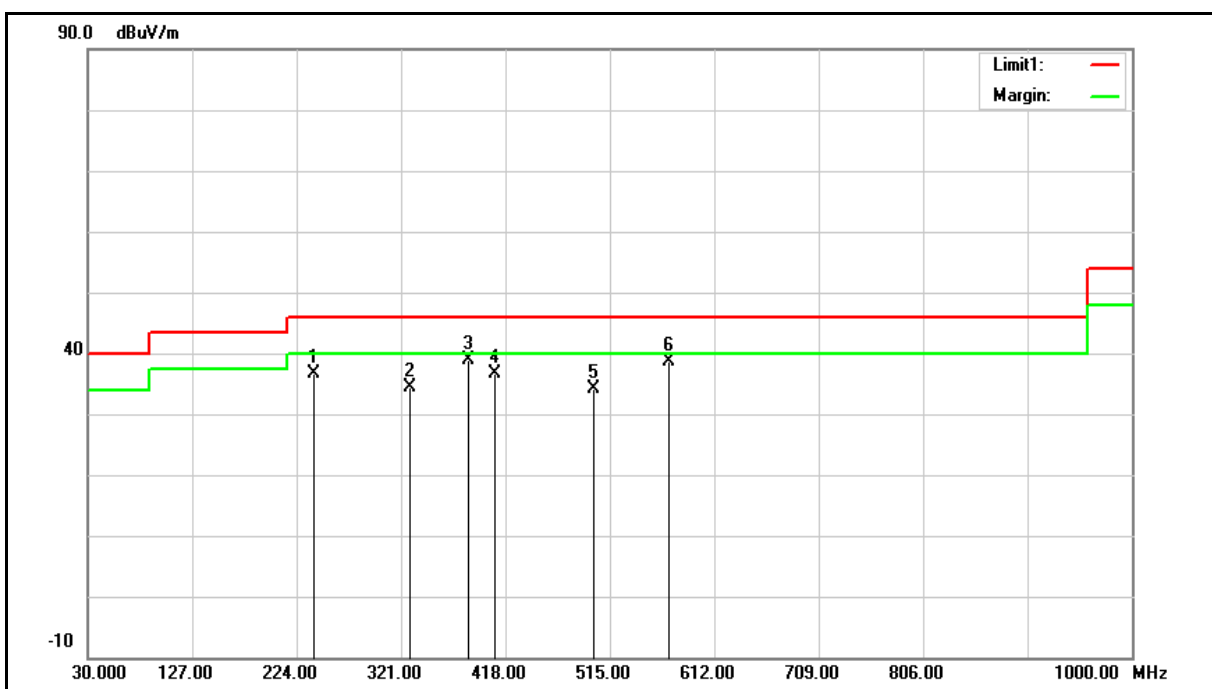

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	239.5200	62.17	-25.59	36.58	46.00	-9.42	QP
2	328.7600	57.33	-22.97	34.36	46.00	-11.64	QP
3	384.0500	60.61	-21.68	38.93	46.00	-7.07	QP
4	408.3000	57.66	-21.13	36.53	46.00	-9.47	QP
5	499.4800	53.68	-19.65	34.03	46.00	-11.97	QP
6	570.2900	56.37	-17.86	38.51	46.00	-7.49	QP

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).


Example: $36.58 = -25.59 + 62.17$

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

場強輻射量測 (1 GHz 以上)

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

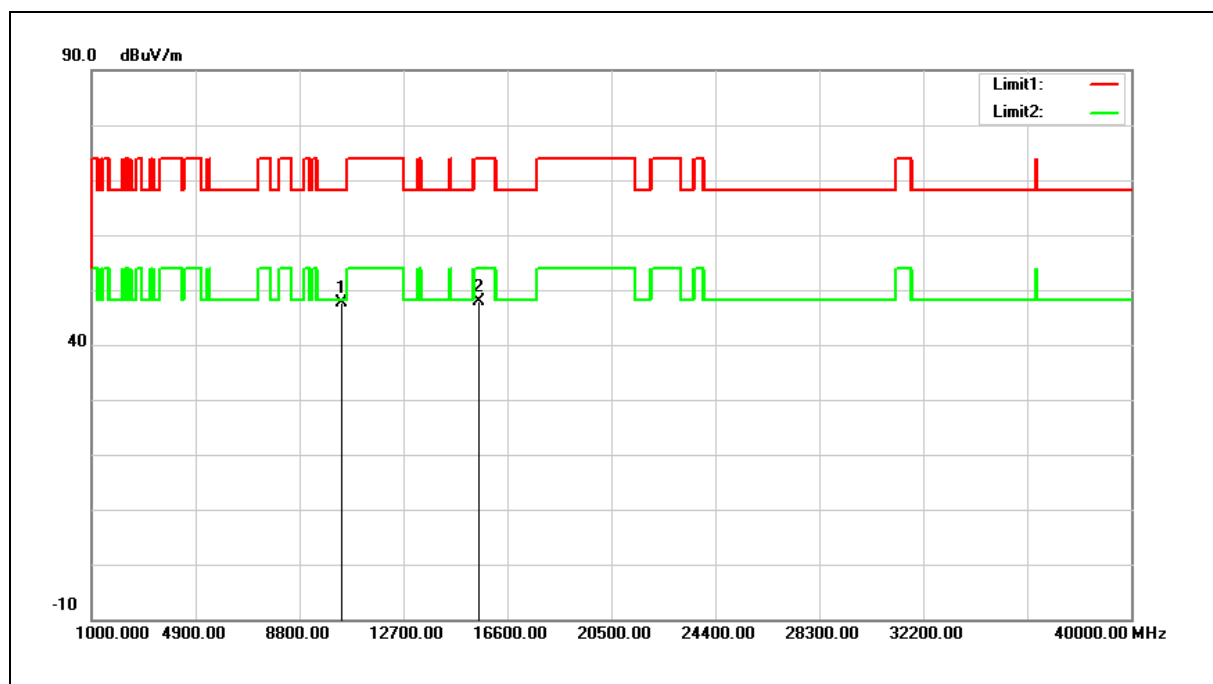

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	35.96	11.69	47.65	68.20	-20.55	peak
2	15540.000	33.33	14.52	47.85	74.00	-26.15	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 47.65 = 11.69 + 35.96

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

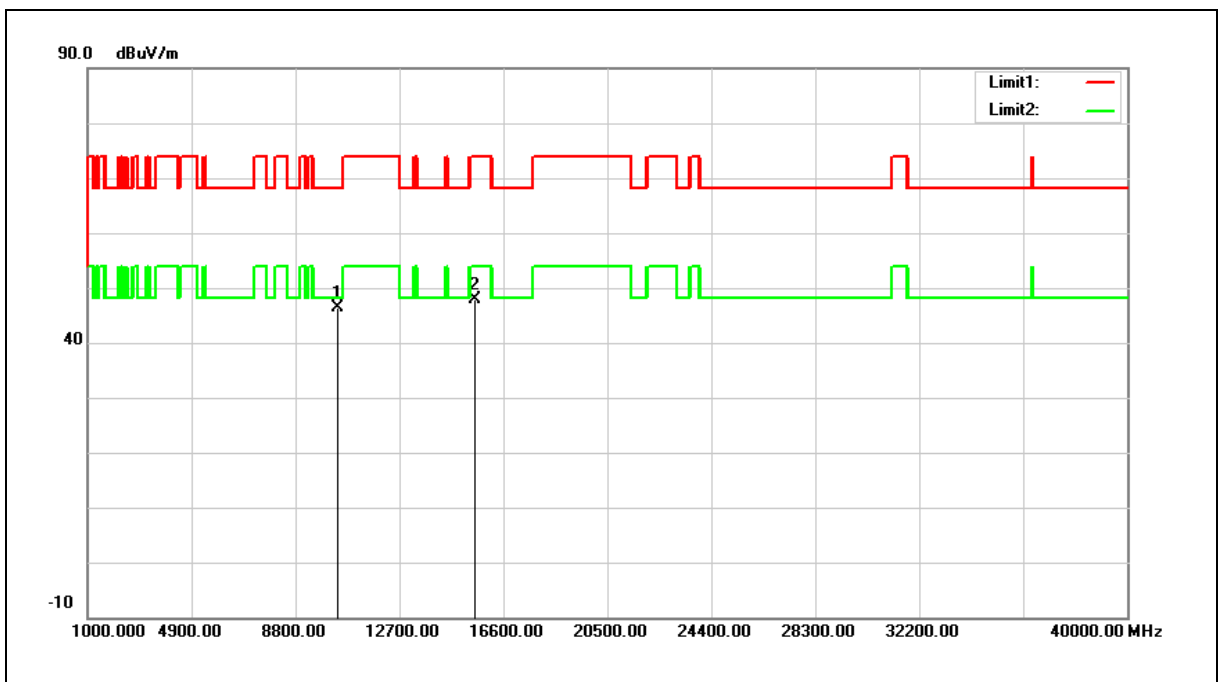

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	34.58	11.69	46.27	68.20	-21.93	peak
2	15540.000	33.40	14.52	47.92	74.00	-26.08	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: $46.27 = 11.69 + 34.58$

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

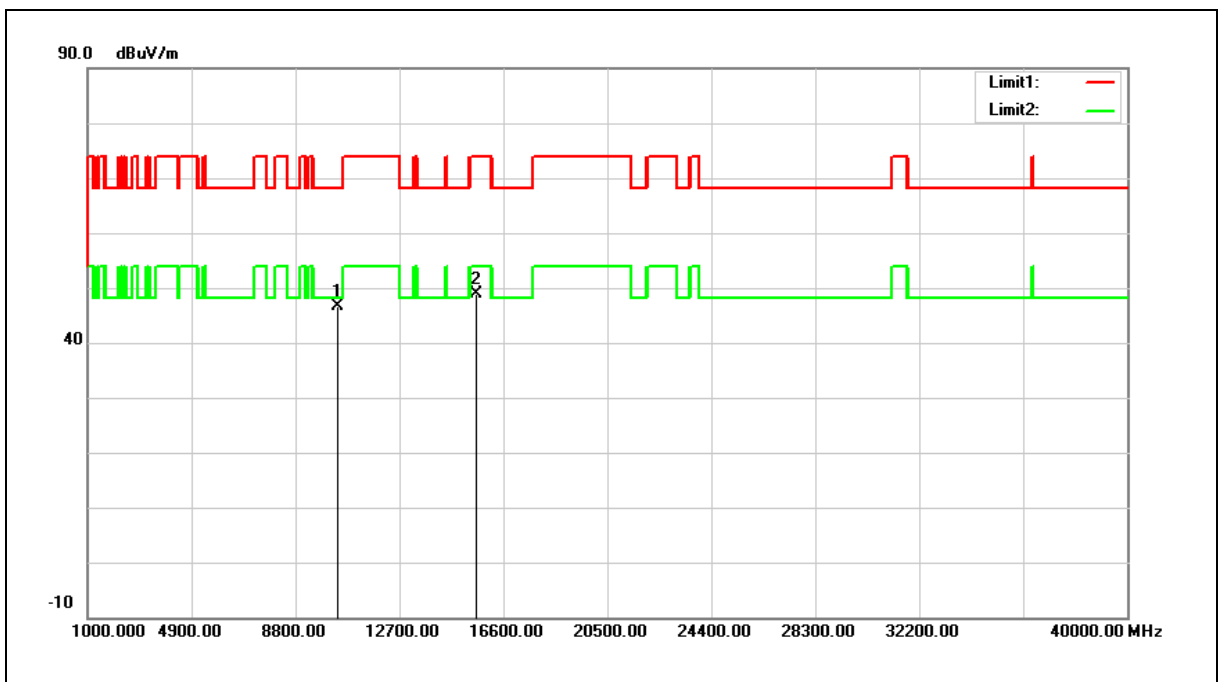


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	34.89	11.79	46.68	68.20	-21.52	peak
2	15600.000	34.50	14.39	48.89	74.00	-25.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

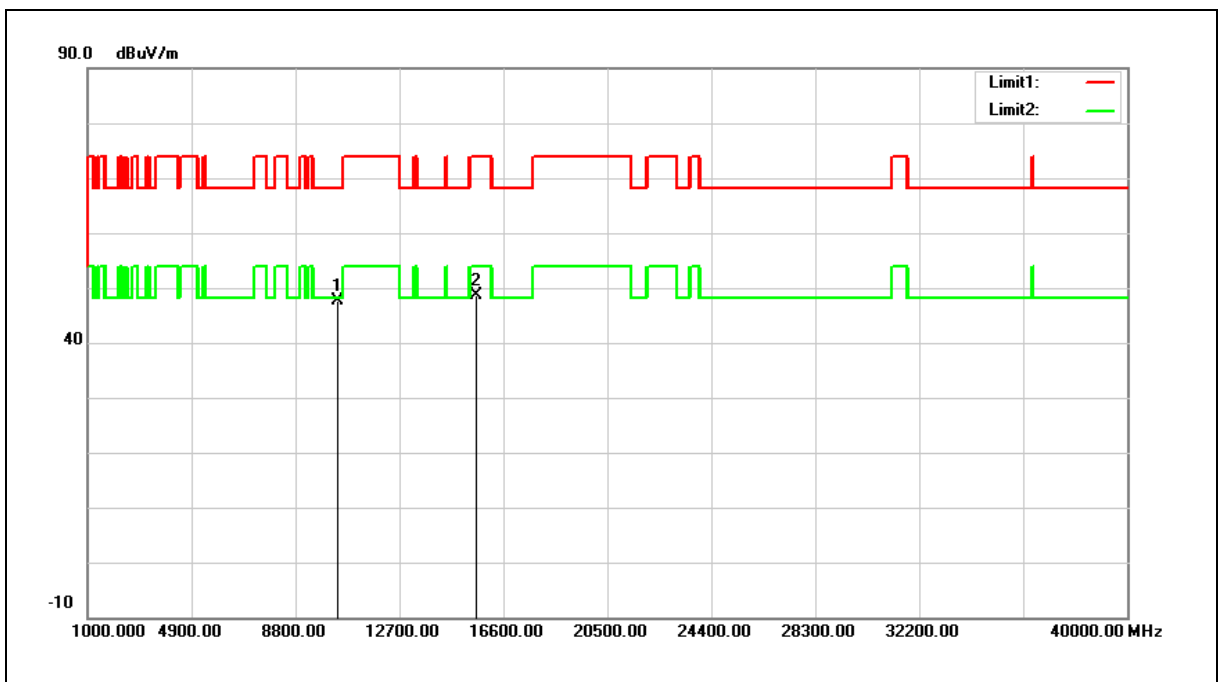


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	35.95	11.79	47.74	68.20	-20.46	peak
2	15600.000	34.12	14.39	48.51	74.00	-25.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

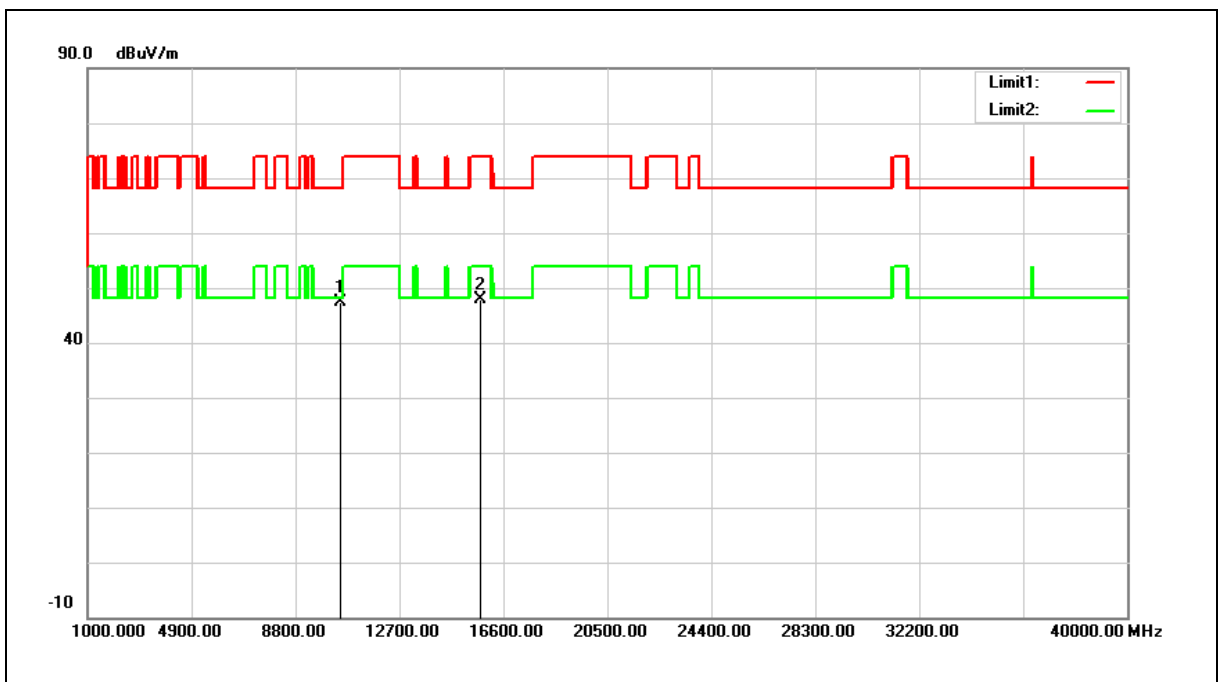


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	35.31	12.00	47.31	68.20	-20.89	peak
2	15720.000	33.76	14.13	47.89	74.00	-26.11	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

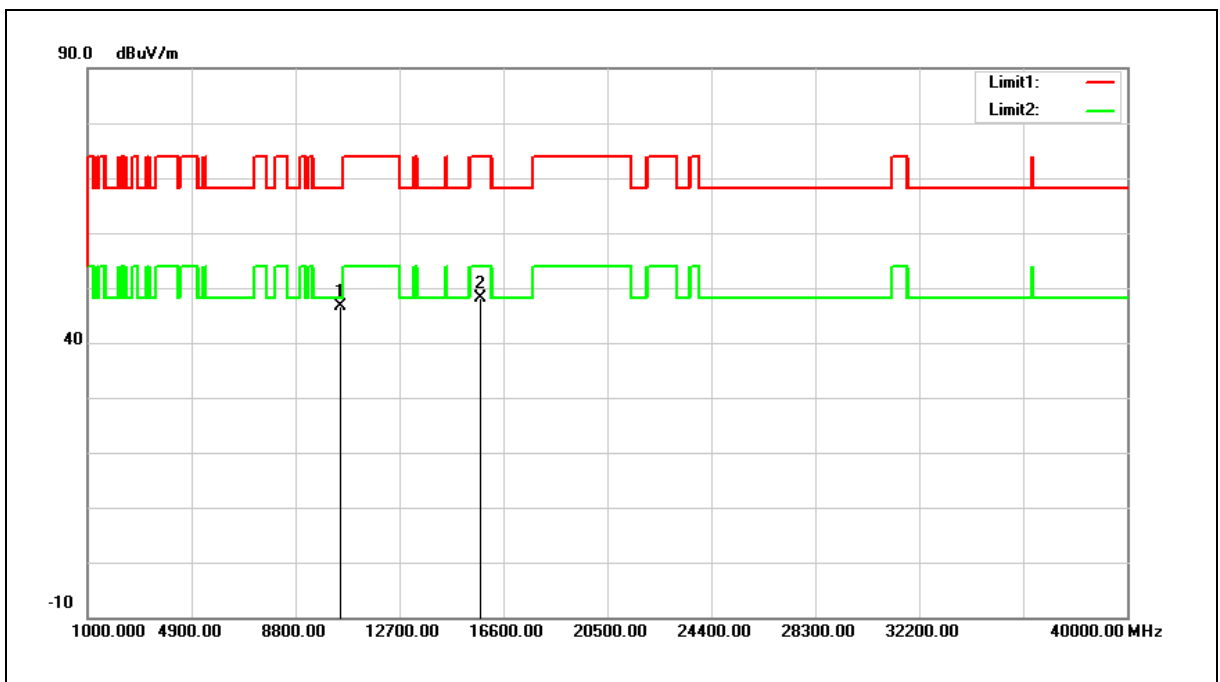


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	34.51	12.00	46.51	68.20	-21.69	peak
2	15720.000	34.01	14.13	48.14	74.00	-25.86	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

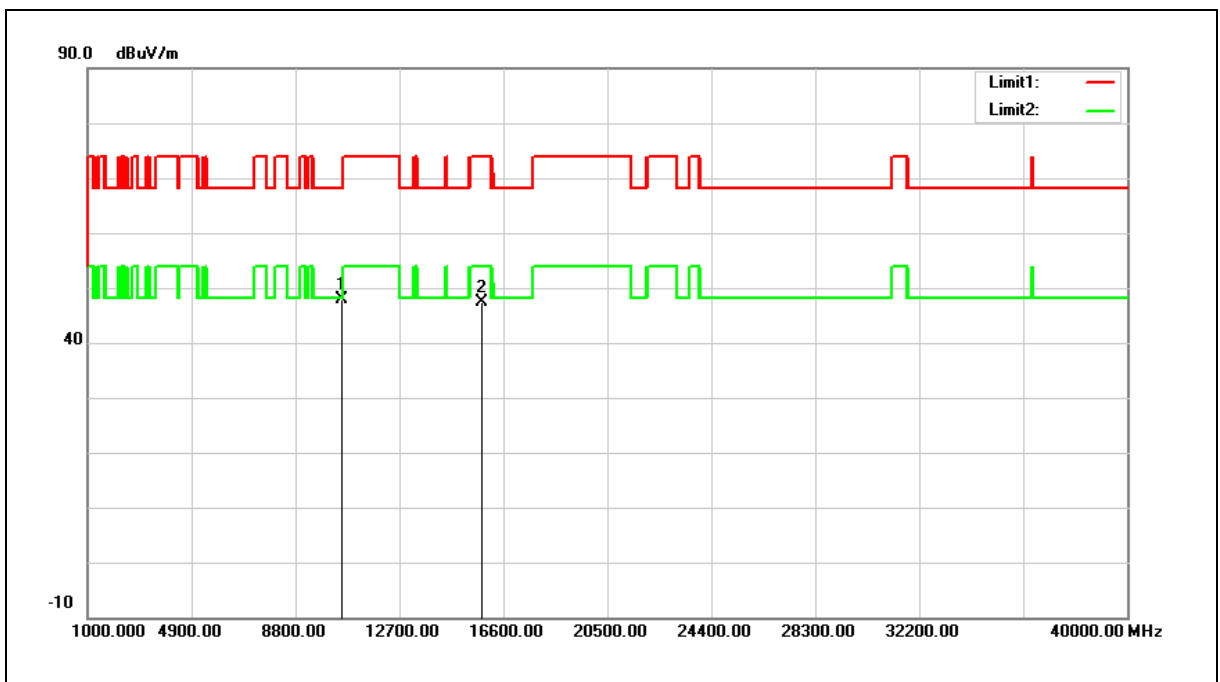


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	35.88	12.06	47.94	68.20	-20.26	peak
2	15780.000	33.29	14.02	47.31	74.00	-26.69	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

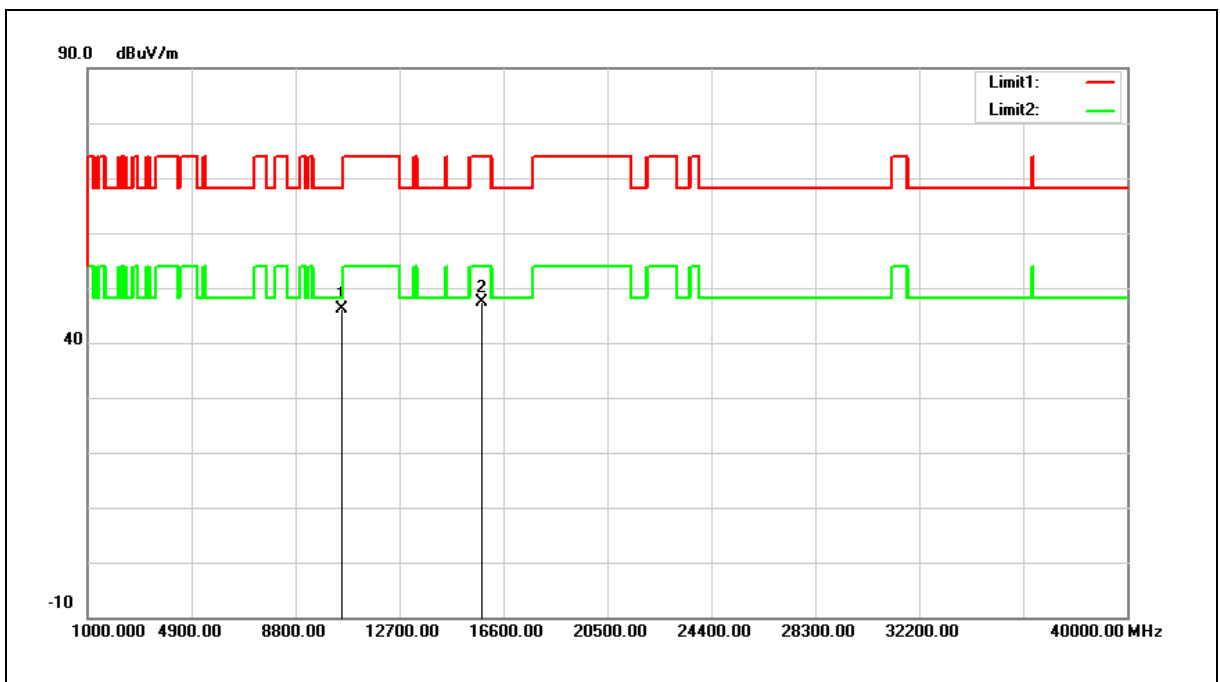


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	33.99	12.06	46.05	68.20	-22.15	peak
2	15780.000	33.32	14.02	47.34	74.00	-26.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

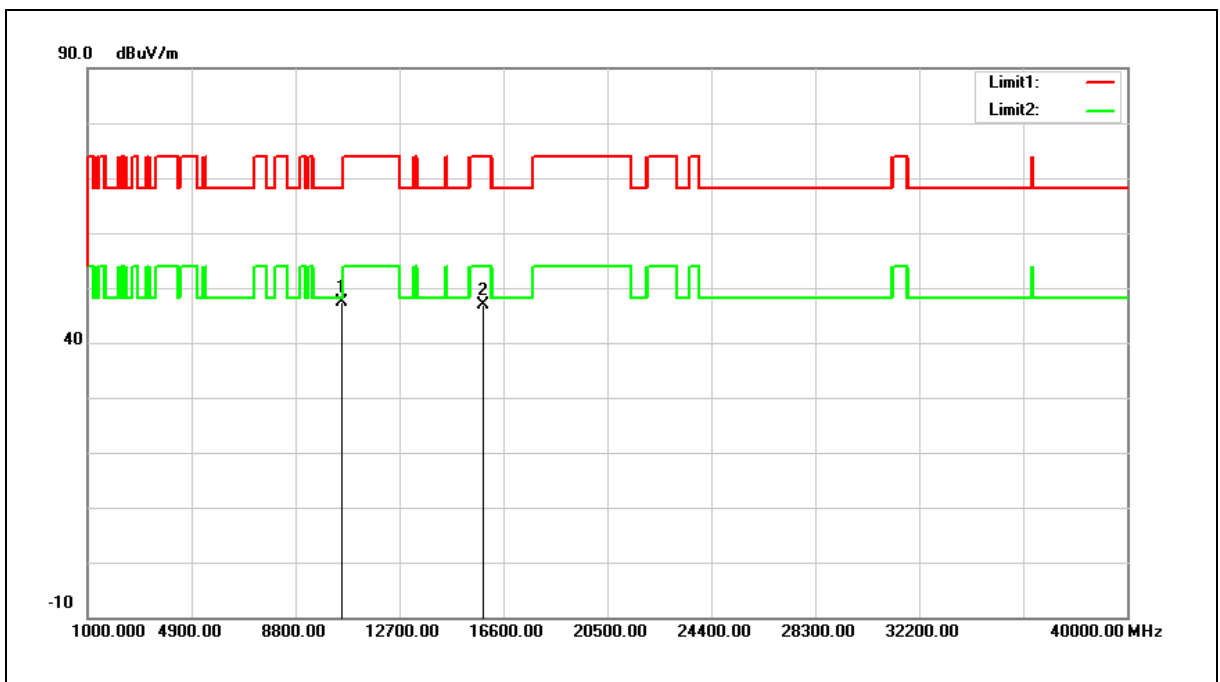


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	35.21	12.09	47.30	68.20	-20.90	peak
2	15840.000	33.02	13.88	46.90	74.00	-27.10	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

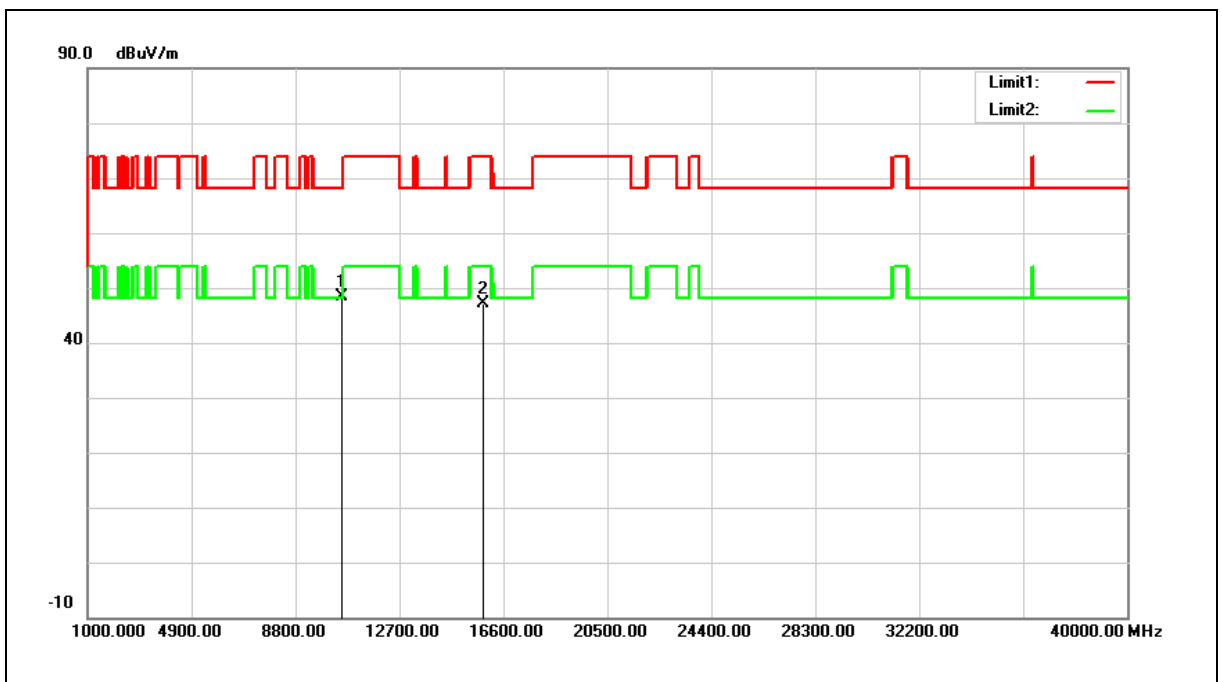


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	36.30	12.09	48.39	68.20	-19.81	peak
2	15840.000	33.23	13.88	47.11	74.00	-26.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

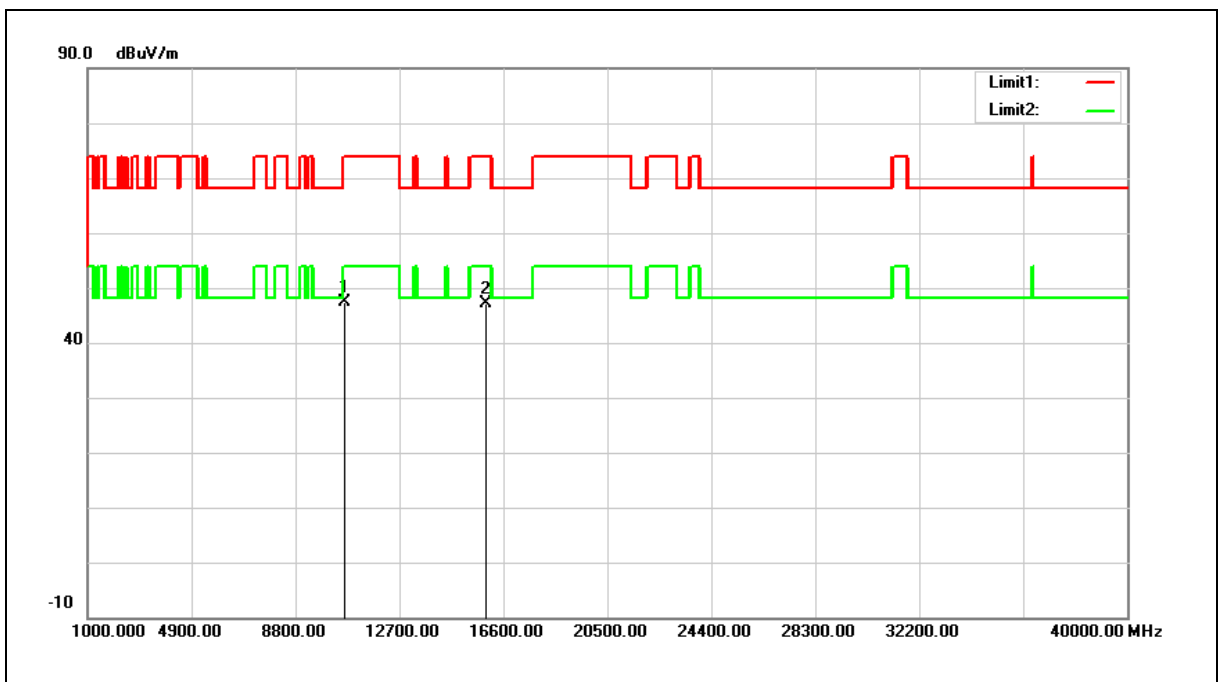


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	35.13	12.14	47.27	74.00	-26.73	peak
2	15960.000	33.51	13.63	47.14	74.00	-26.86	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

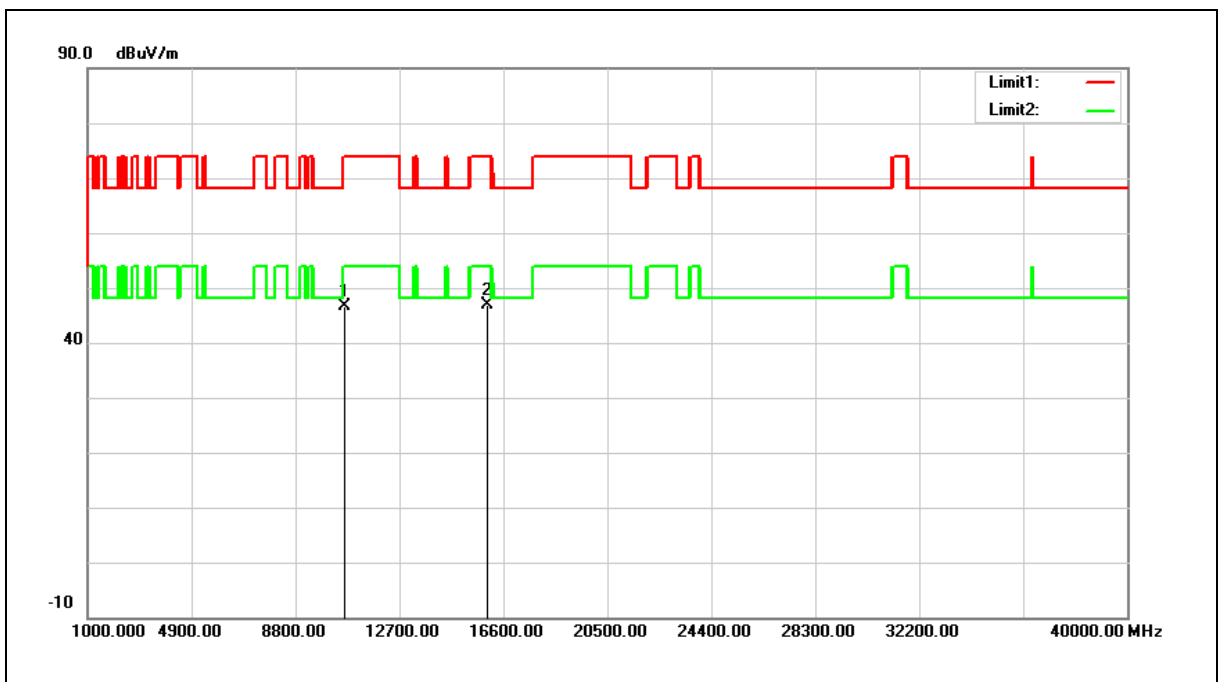


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	34.45	12.14	46.59	74.00	-27.41	peak
2	15960.000	33.31	13.63	46.94	74.00	-27.06	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

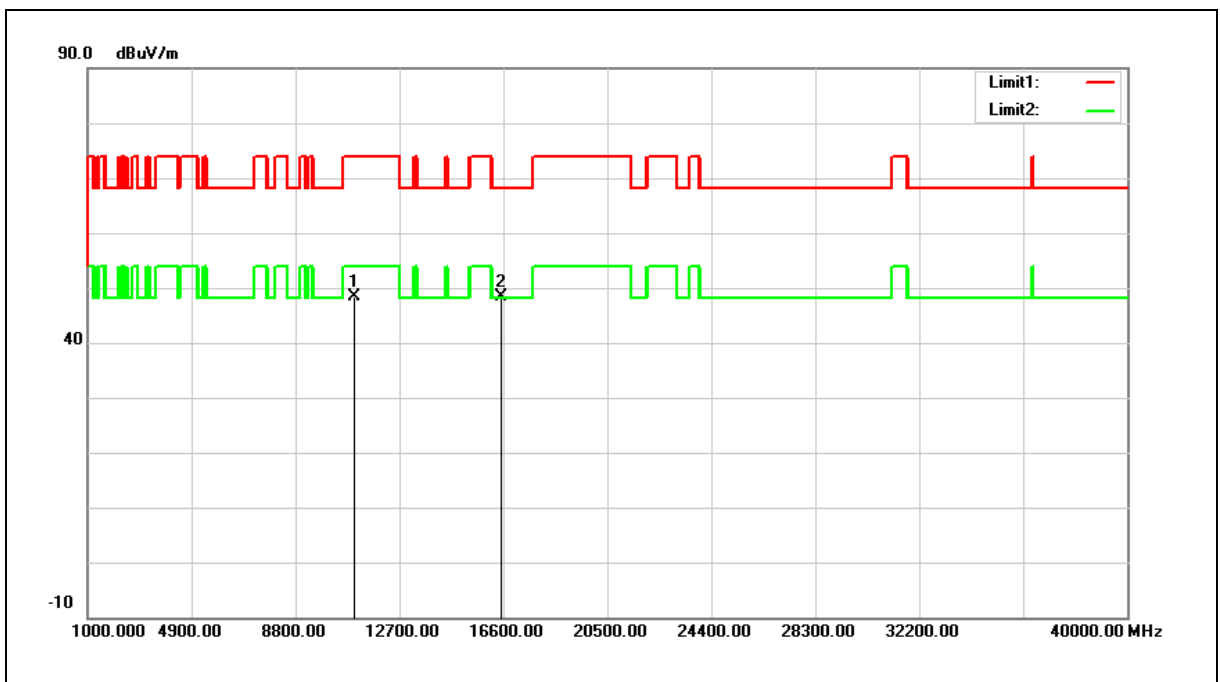


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	36.08	12.39	48.47	74.00	-25.53	peak
2	16500.000	34.25	14.24	48.49	68.20	-19.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

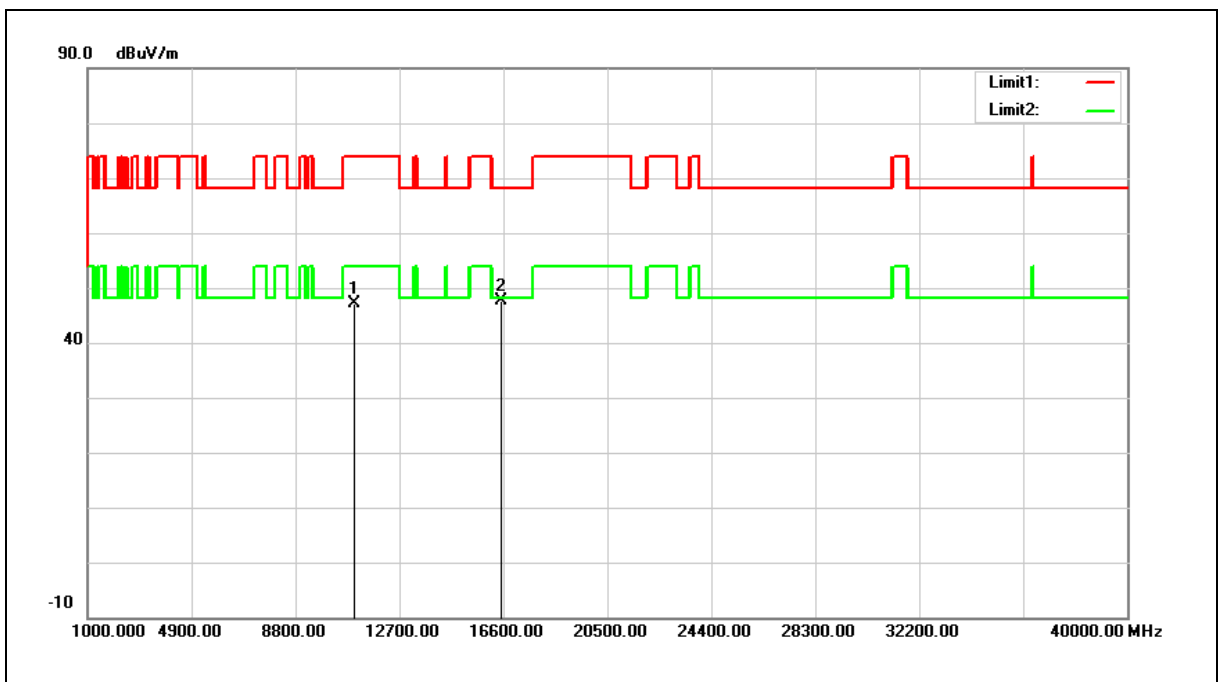


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.71	12.39	47.10	74.00	-26.90	peak
2	16500.000	33.29	14.24	47.53	68.20	-20.67	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

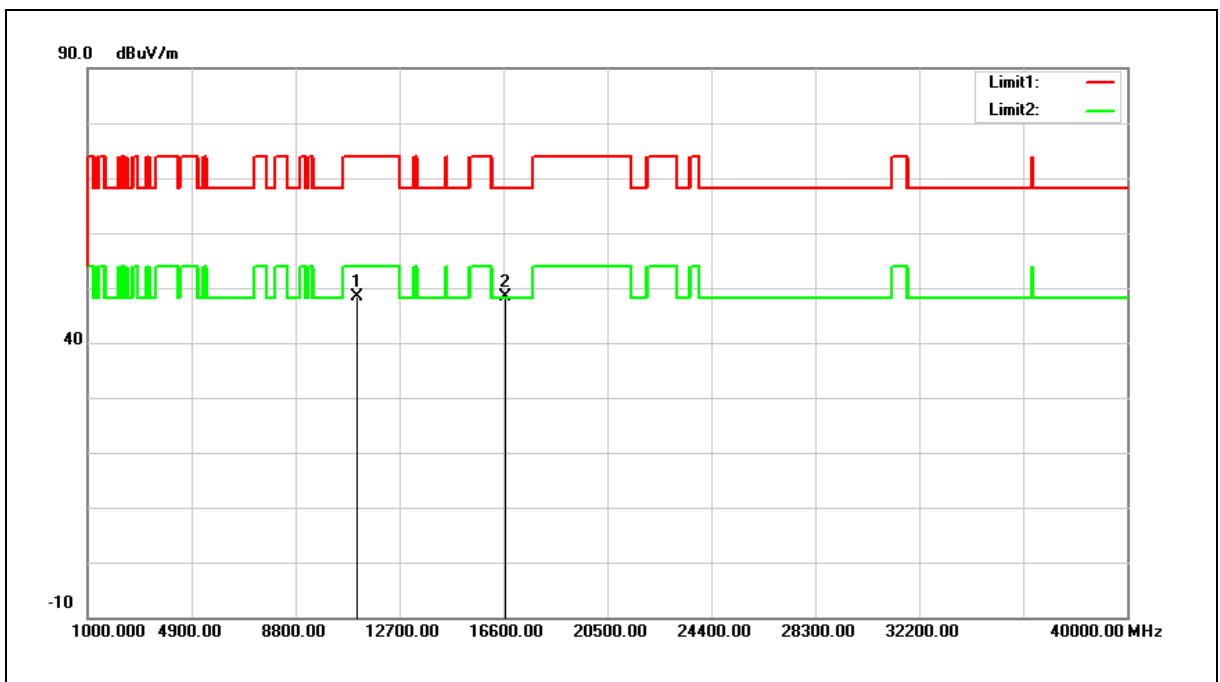


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	35.87	12.46	48.33	74.00	-25.67	peak
2	16680.000	33.17	15.22	48.39	68.20	-19.81	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

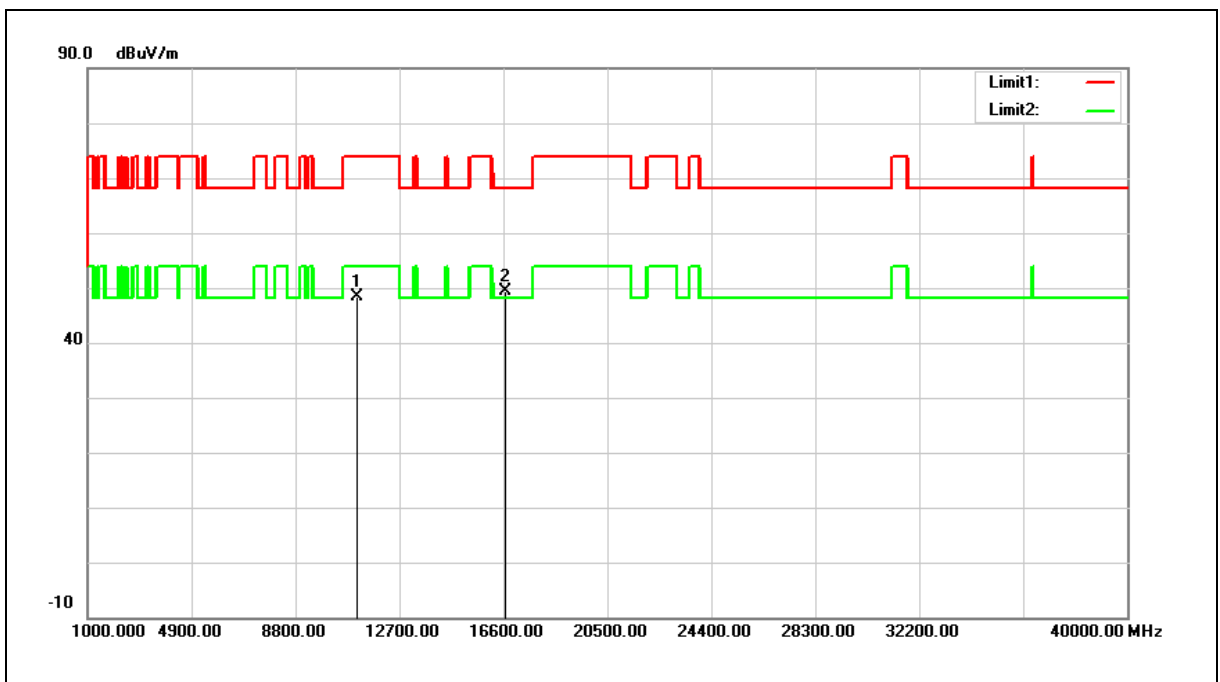


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	35.88	12.46	48.34	74.00	-25.66	peak
2	16680.000	34.05	15.22	49.27	68.20	-18.93	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

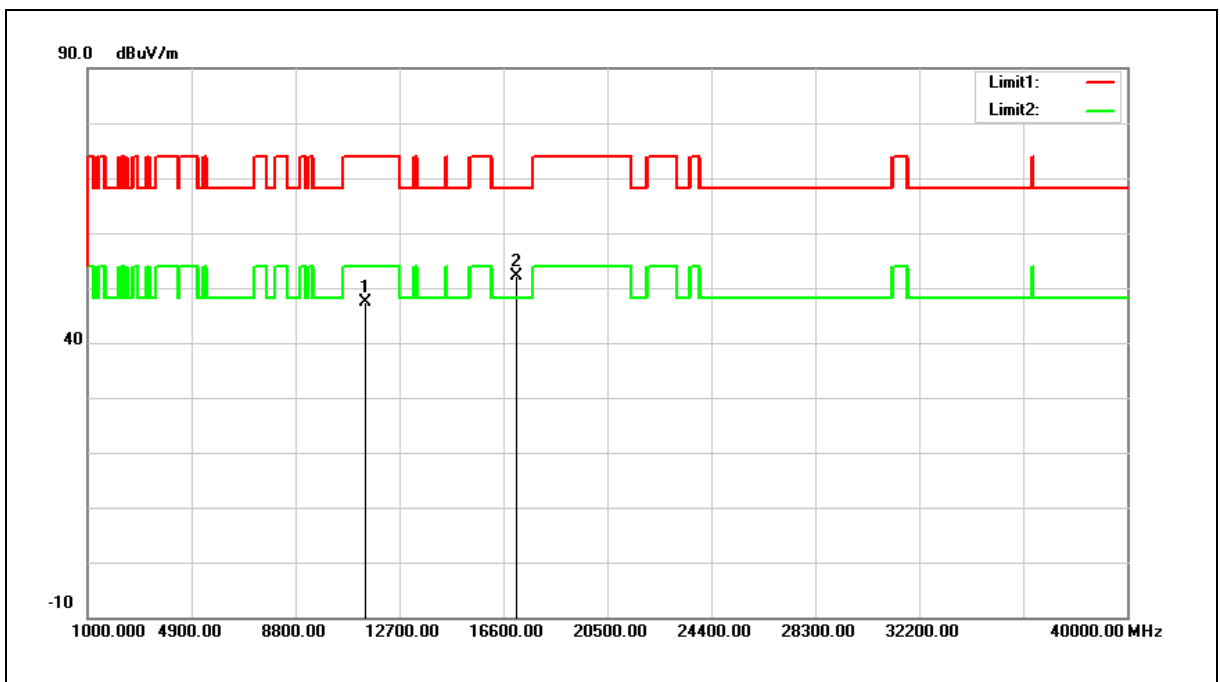


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	34.82	12.63	47.45	74.00	-26.55	peak
2	17100.000	34.53	17.63	52.16	68.20	-16.04	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

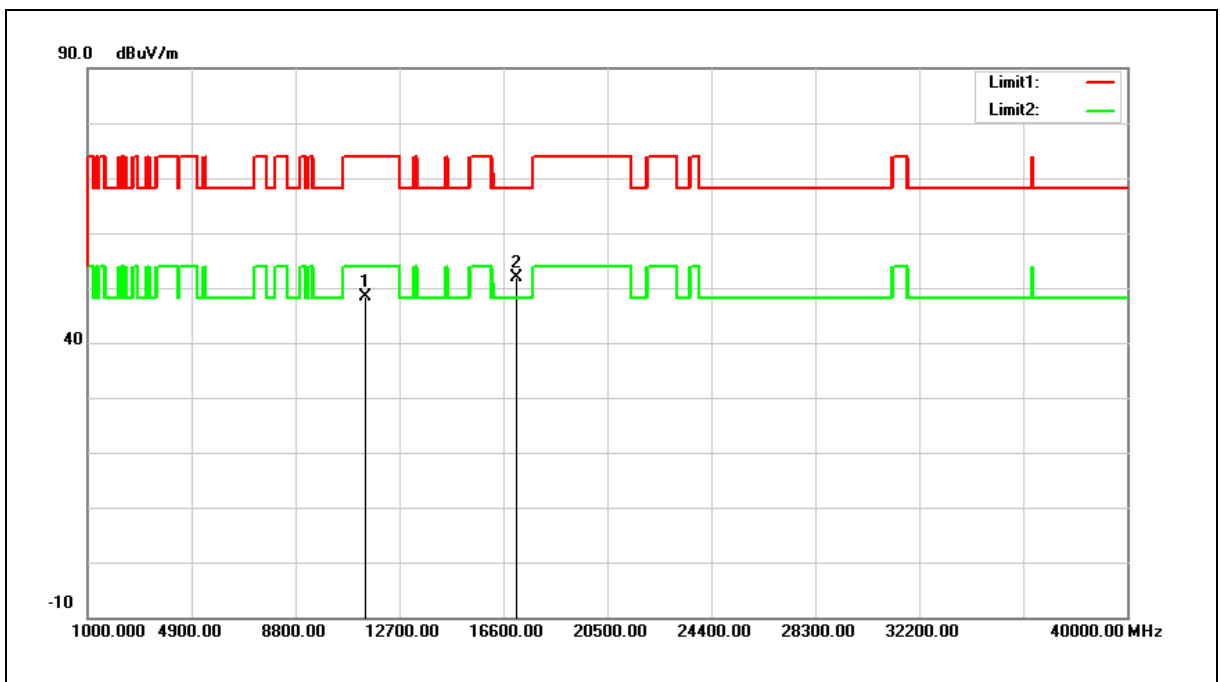


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	35.71	12.63	48.34	74.00	-25.66	peak
2	17100.000	34.19	17.63	51.82	68.20	-16.38	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

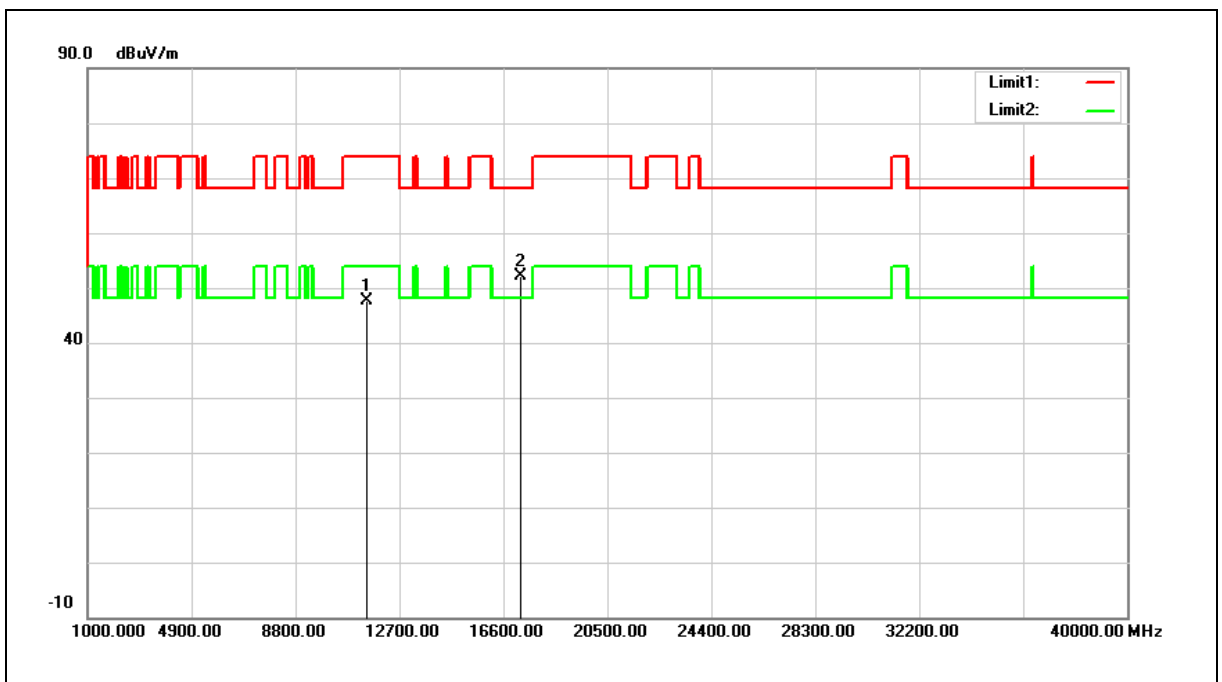


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.01	12.68	47.69	74.00	-26.31	peak
2	17235.000	33.49	18.52	52.01	68.20	-16.19	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

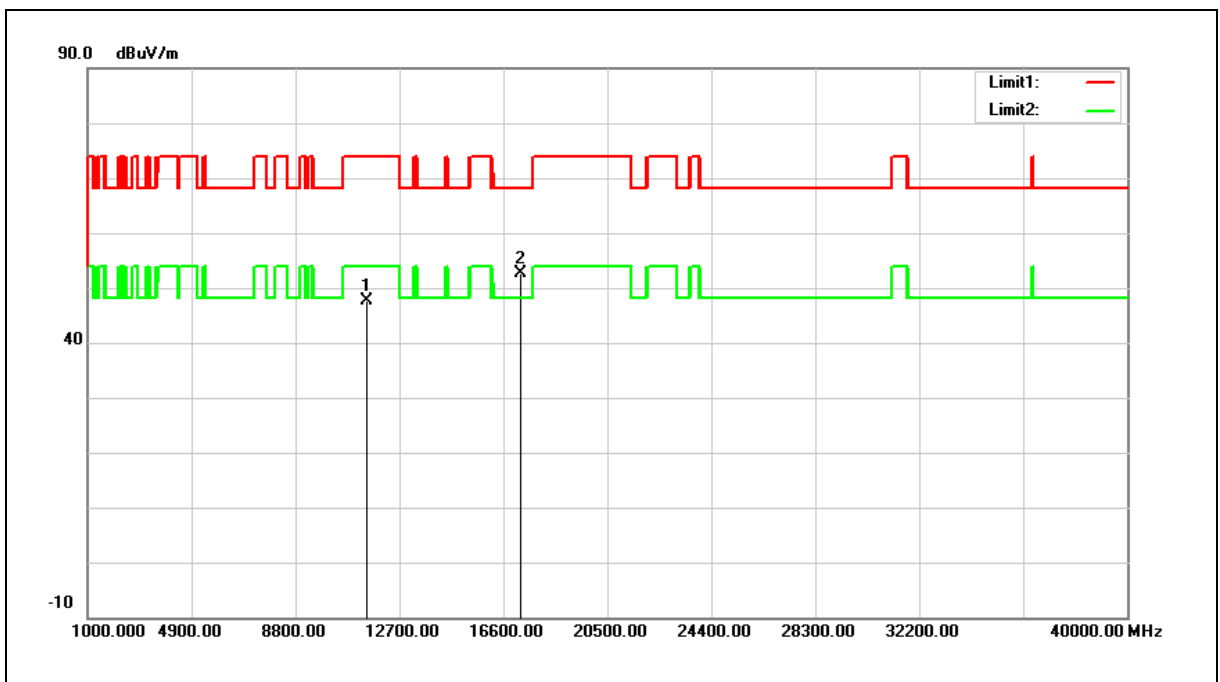


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	34.87	12.68	47.55	74.00	-26.45	peak
2	17235.000	34.02	18.52	52.54	68.20	-15.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

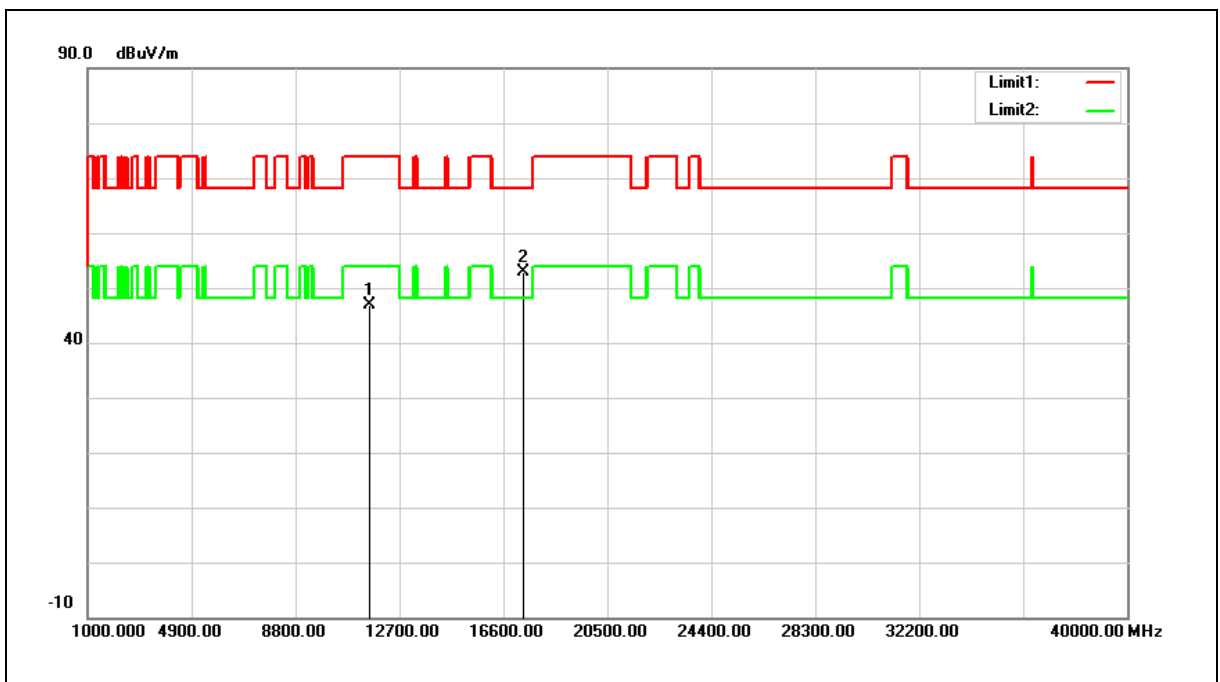


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	34.37	12.59	46.96	74.00	-27.04	peak
2	17355.000	33.66	19.32	52.98	68.20	-15.22	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

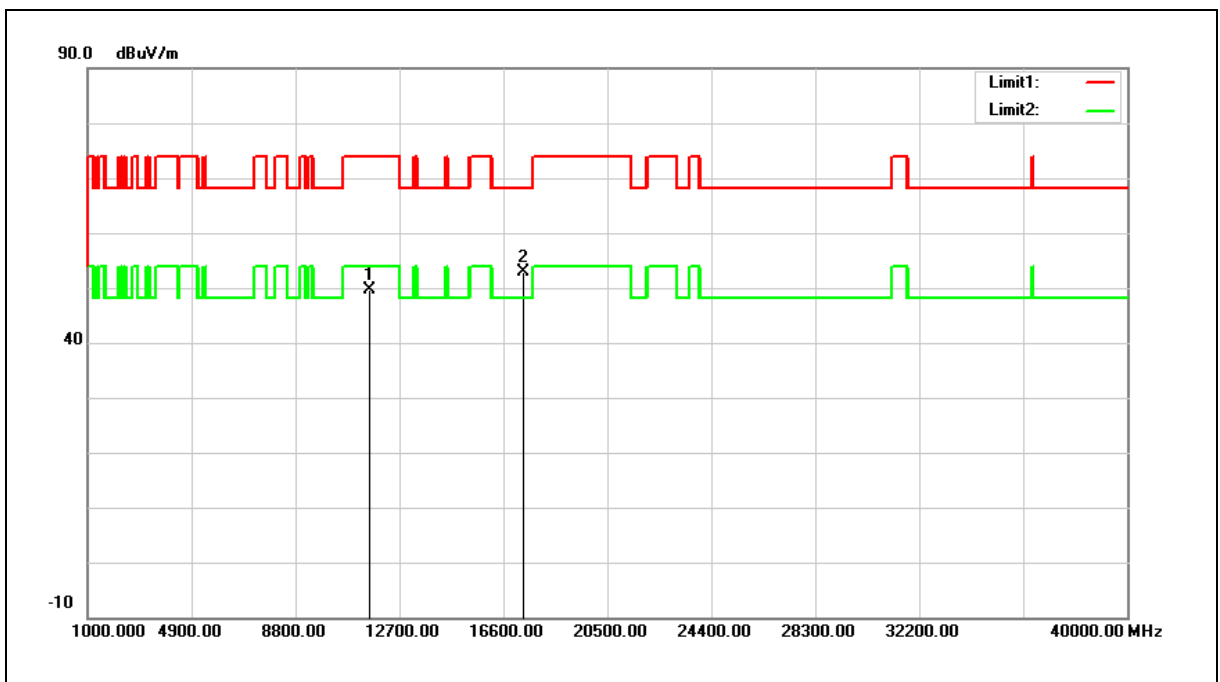


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	37.09	12.59	49.68	74.00	-24.32	peak
2	17355.000	33.55	19.32	52.87	68.20	-15.33	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

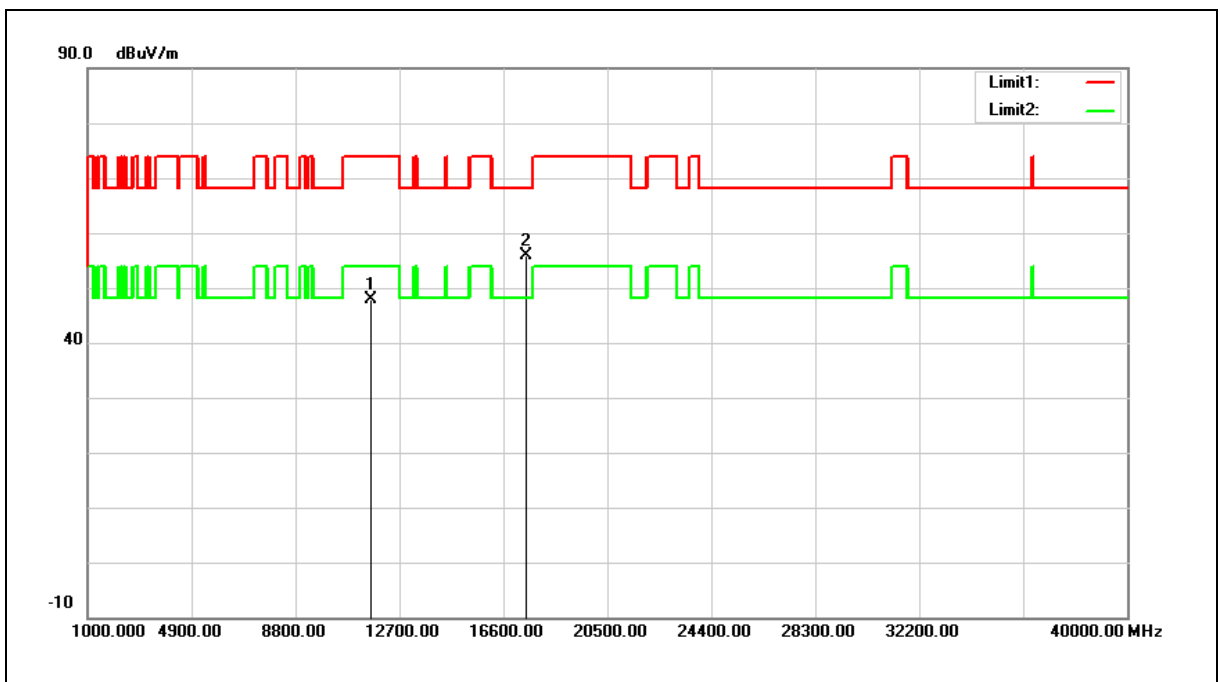


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.47	12.48	47.95	74.00	-26.05	peak
2	17475.000	35.68	20.13	55.81	68.20	-12.39	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

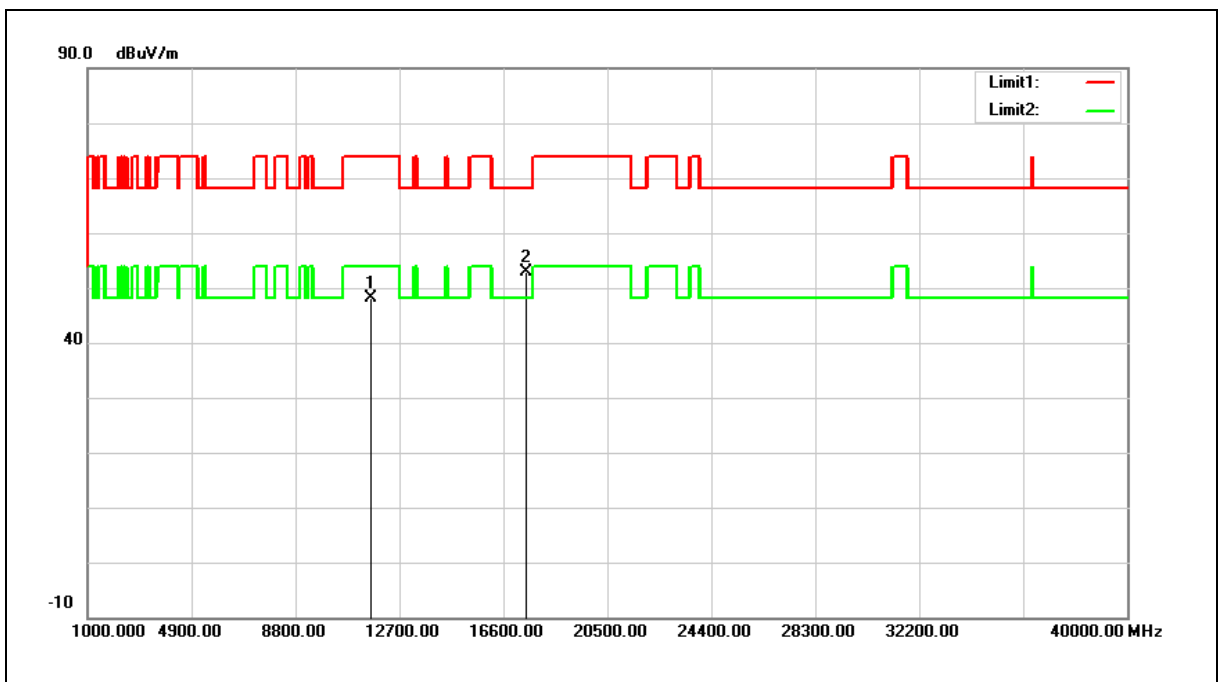


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.72	12.48	48.20	74.00	-25.80	peak
2	17475.000	32.68	20.13	52.81	68.20	-15.39	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

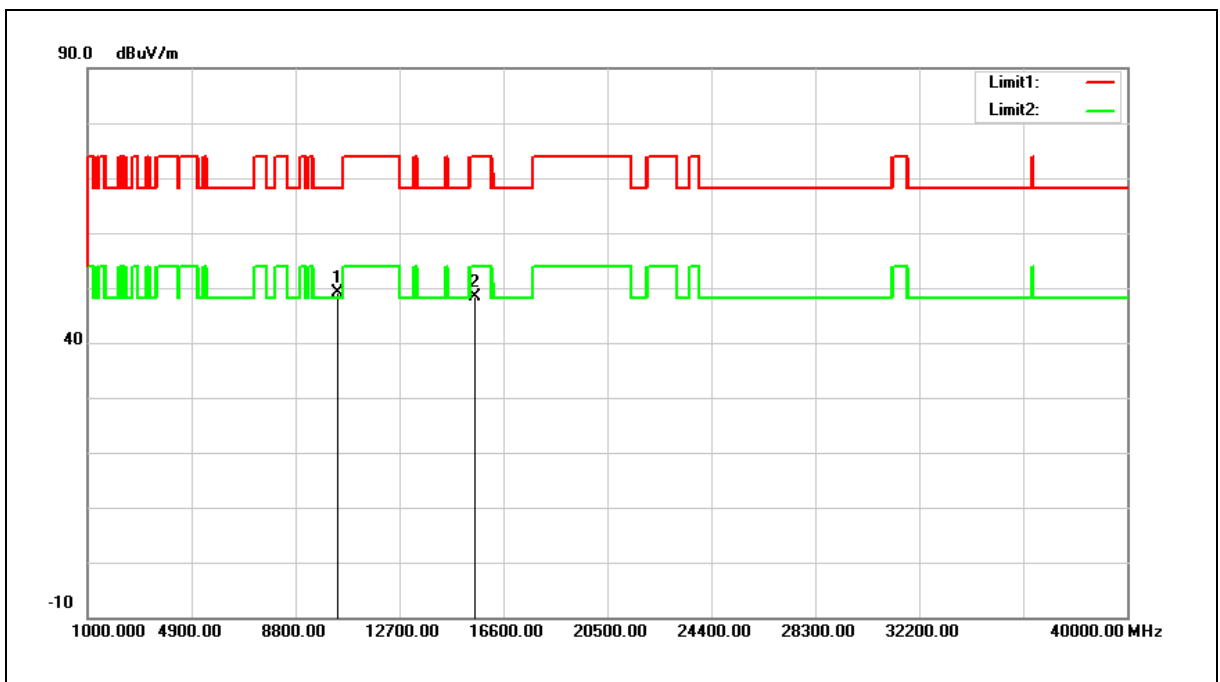


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	37.50	11.69	49.19	68.20	-19.01	peak
2	15540.000	33.78	14.52	48.30	74.00	-25.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

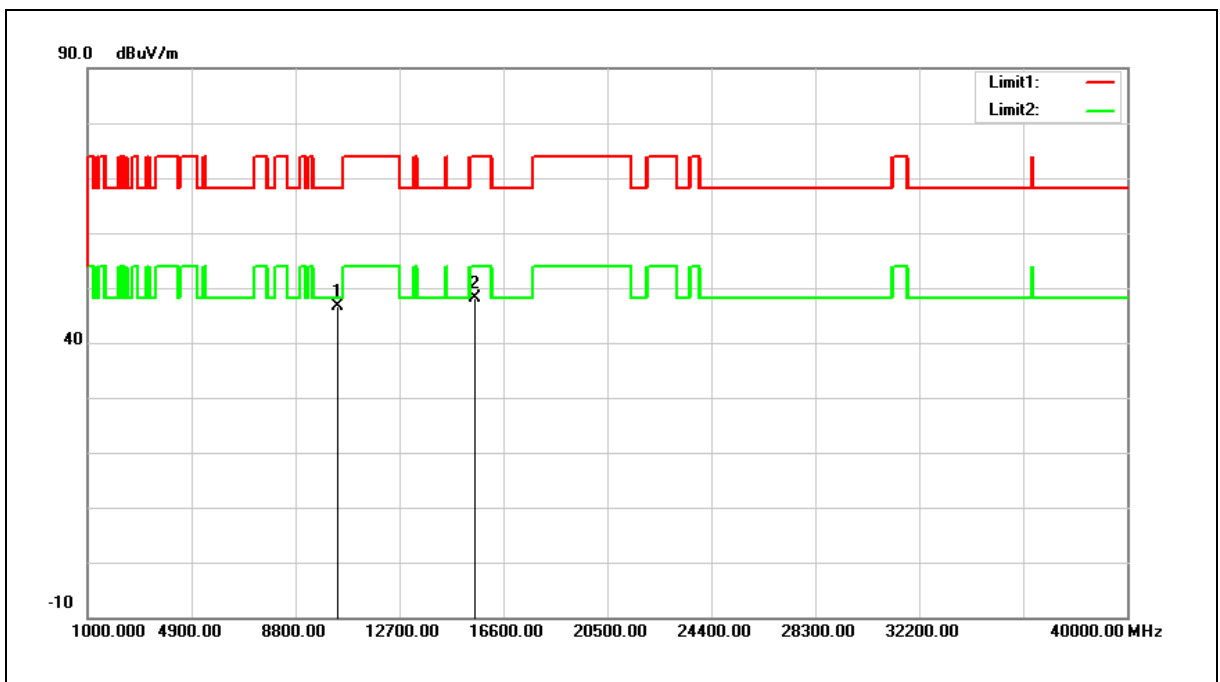


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	35.02	11.69	46.71	68.20	-21.49	peak
2	15540.000	33.57	14.52	48.09	74.00	-25.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

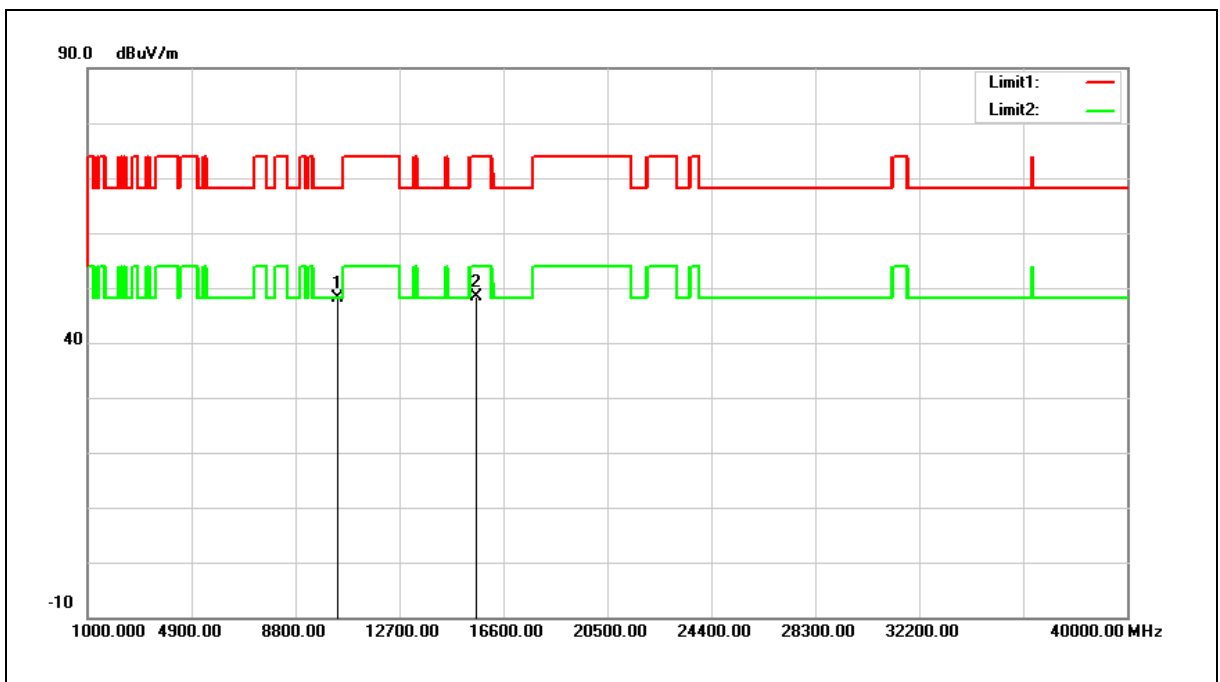


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	36.34	11.79	48.13	68.20	-20.07	peak
2	15600.000	33.93	14.39	48.32	74.00	-25.68	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

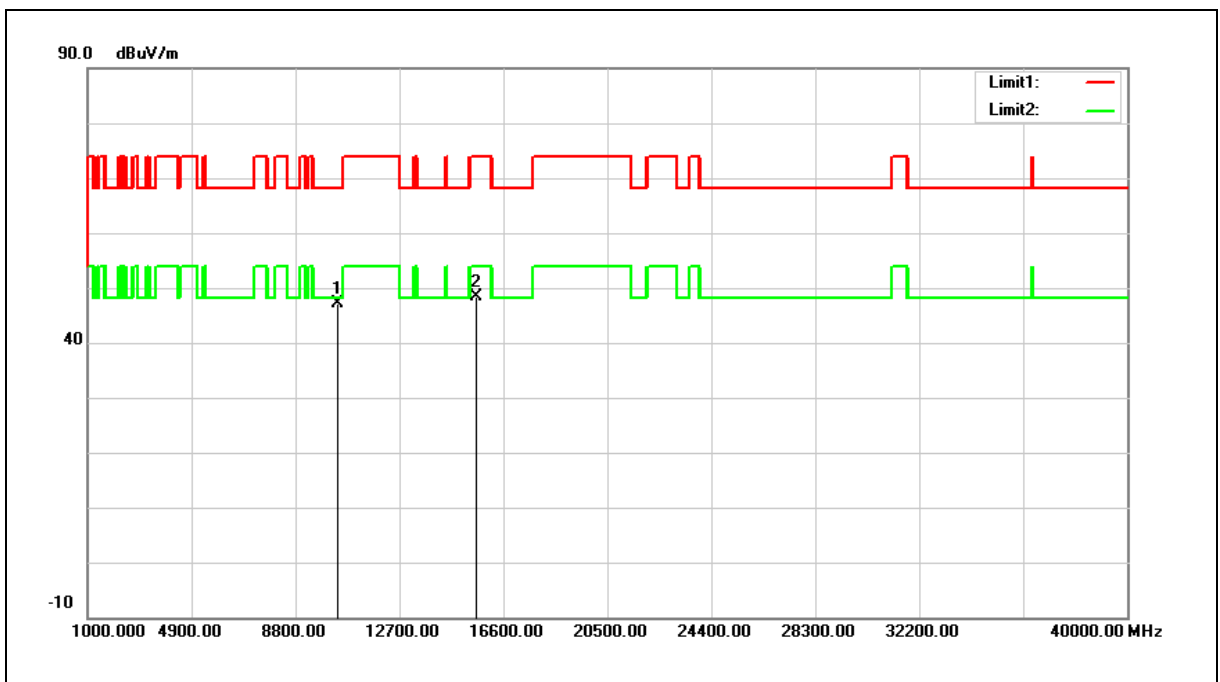


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	35.35	11.79	47.14	68.20	-21.06	peak
2	15600.000	33.89	14.39	48.28	74.00	-25.72	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

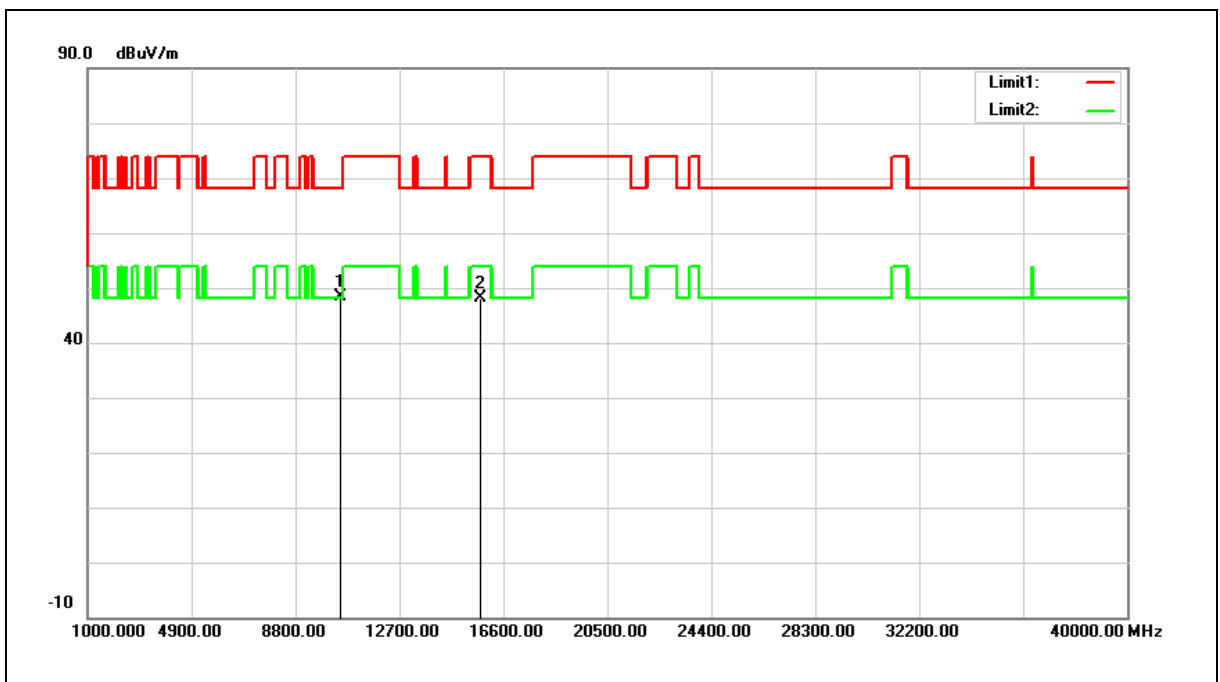


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	36.49	12.00	48.49	68.20	-19.71	peak
2	15720.000	33.94	14.13	48.07	74.00	-25.93	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

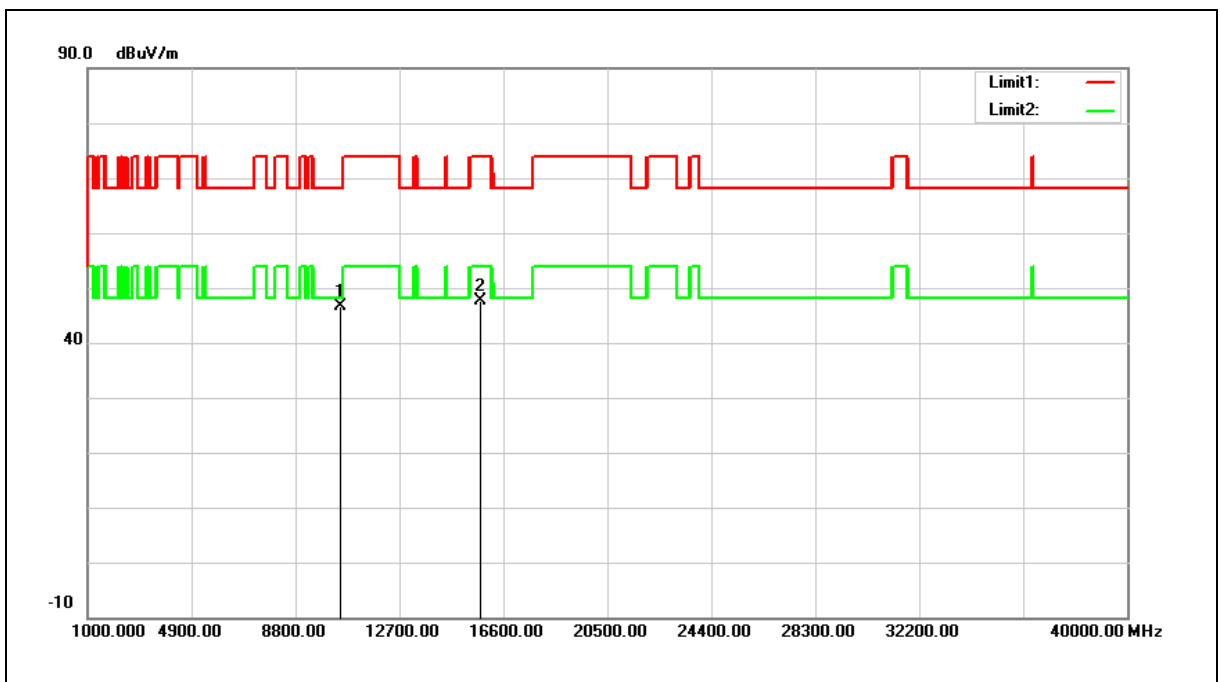


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	34.68	12.00	46.68	68.20	-21.52	peak
2	15720.000	33.48	14.13	47.61	74.00	-26.39	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

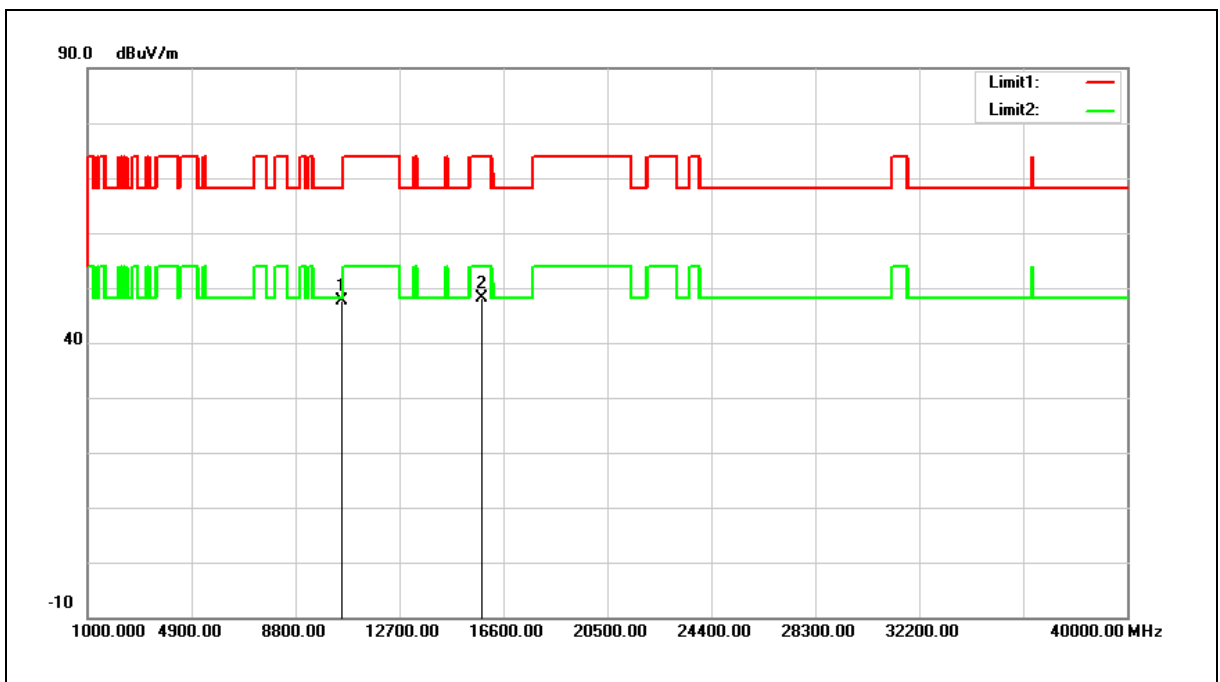


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	35.62	12.06	47.68	68.20	-20.52	peak
2	15780.000	34.05	14.02	48.07	74.00	-25.93	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

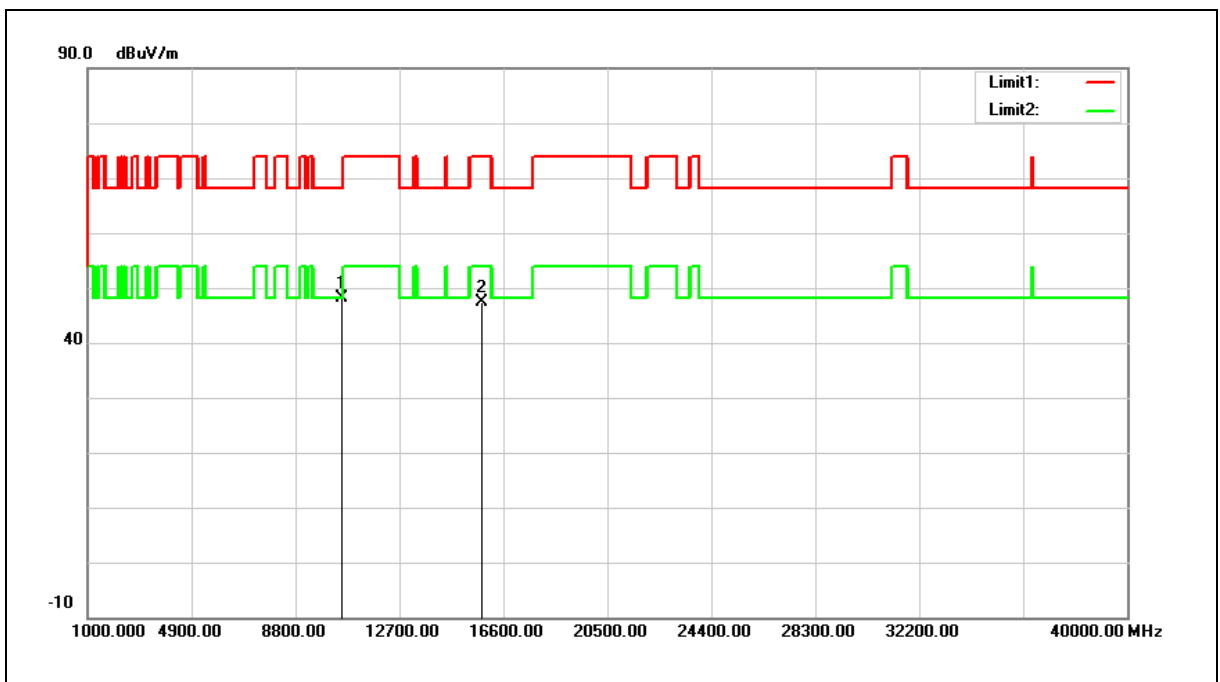


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	36.17	12.06	48.23	68.20	-19.97	peak
2	15780.000	33.25	14.02	47.27	74.00	-26.73	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

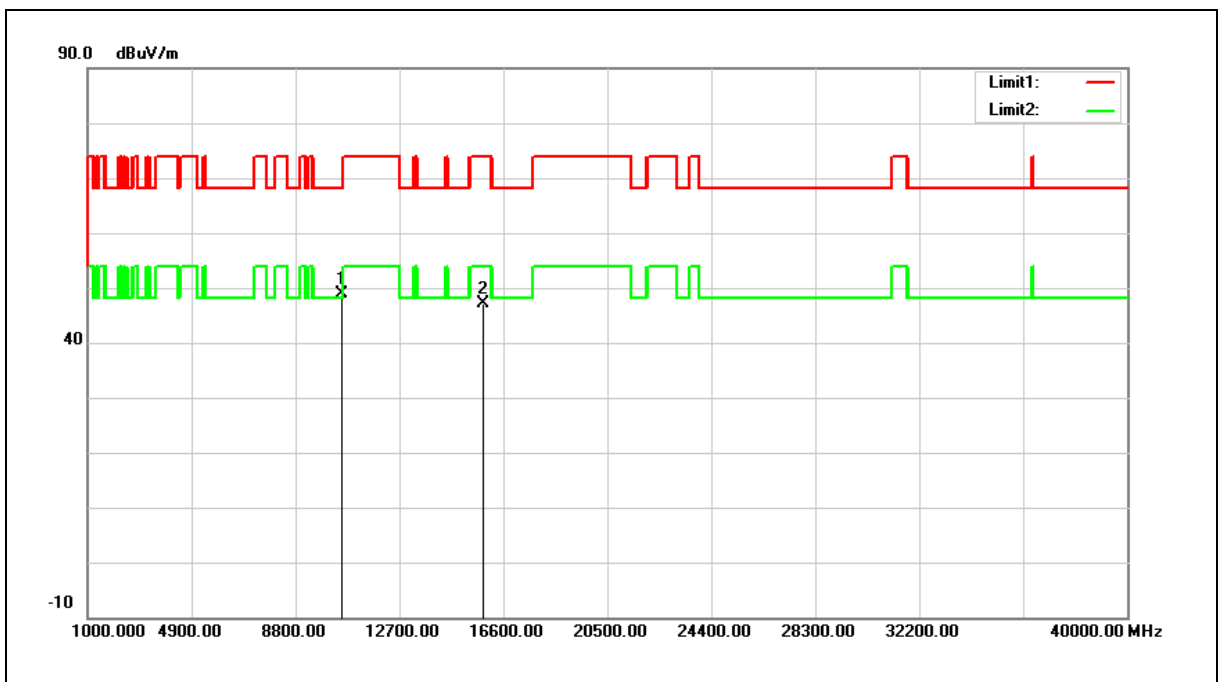


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	36.90	12.09	48.99	68.20	-19.21	peak
2	15840.000	33.16	13.88	47.04	74.00	-26.96	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

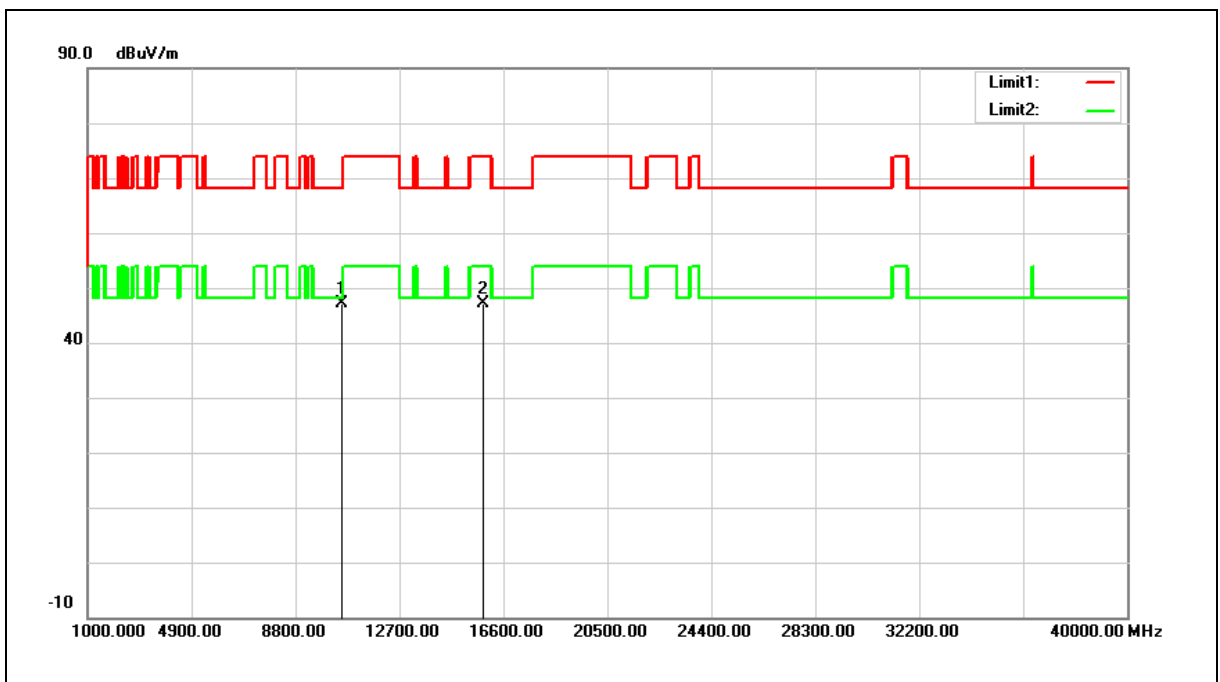


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	35.05	12.09	47.14	68.20	-21.06	peak
2	15840.000	33.31	13.88	47.19	74.00	-26.81	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

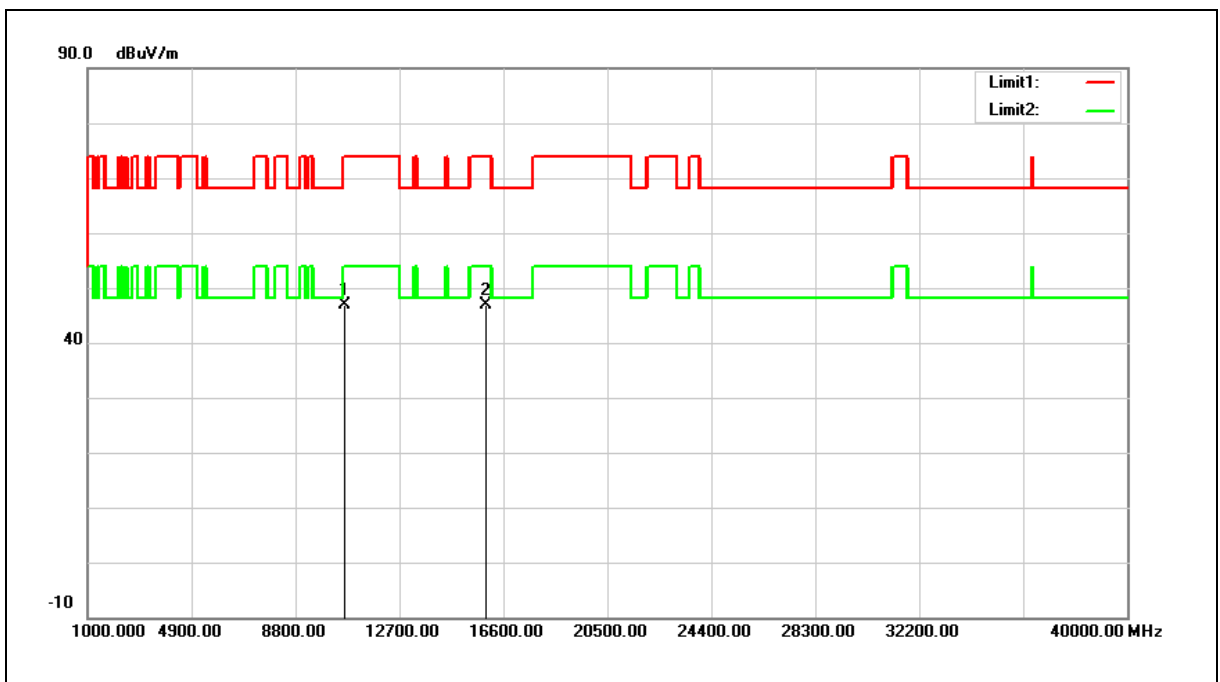


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	34.75	12.14	46.89	74.00	-27.11	peak
2	15960.000	33.13	13.63	46.76	74.00	-27.24	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

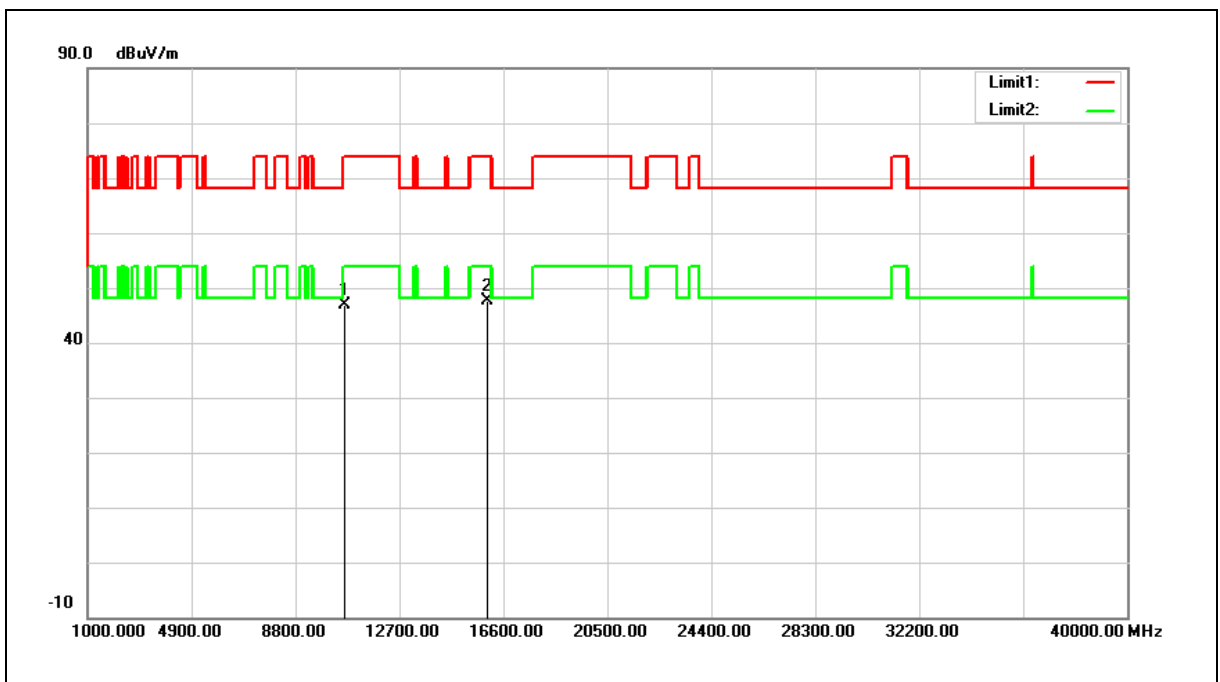


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	34.84	12.14	46.98	74.00	-27.02	peak
2	15960.000	34.04	13.63	47.67	74.00	-26.33	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

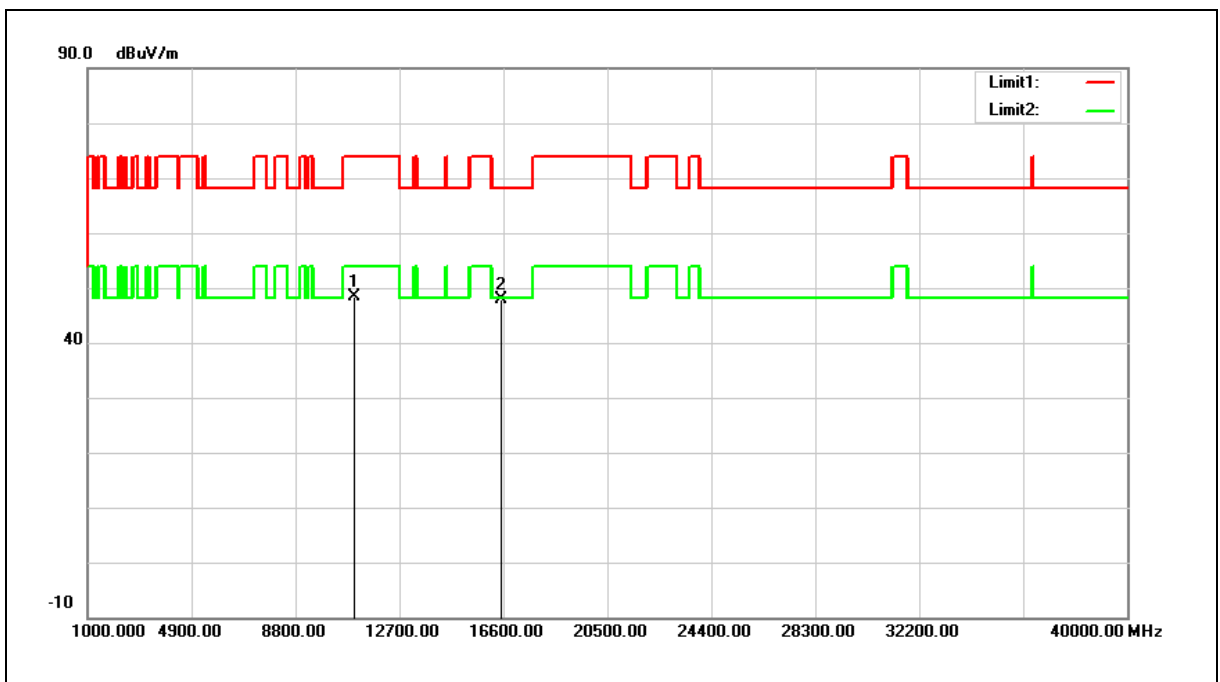


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	35.96	12.39	48.35	74.00	-25.65	peak
2	16500.000	33.66	14.24	47.90	68.20	-20.30	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

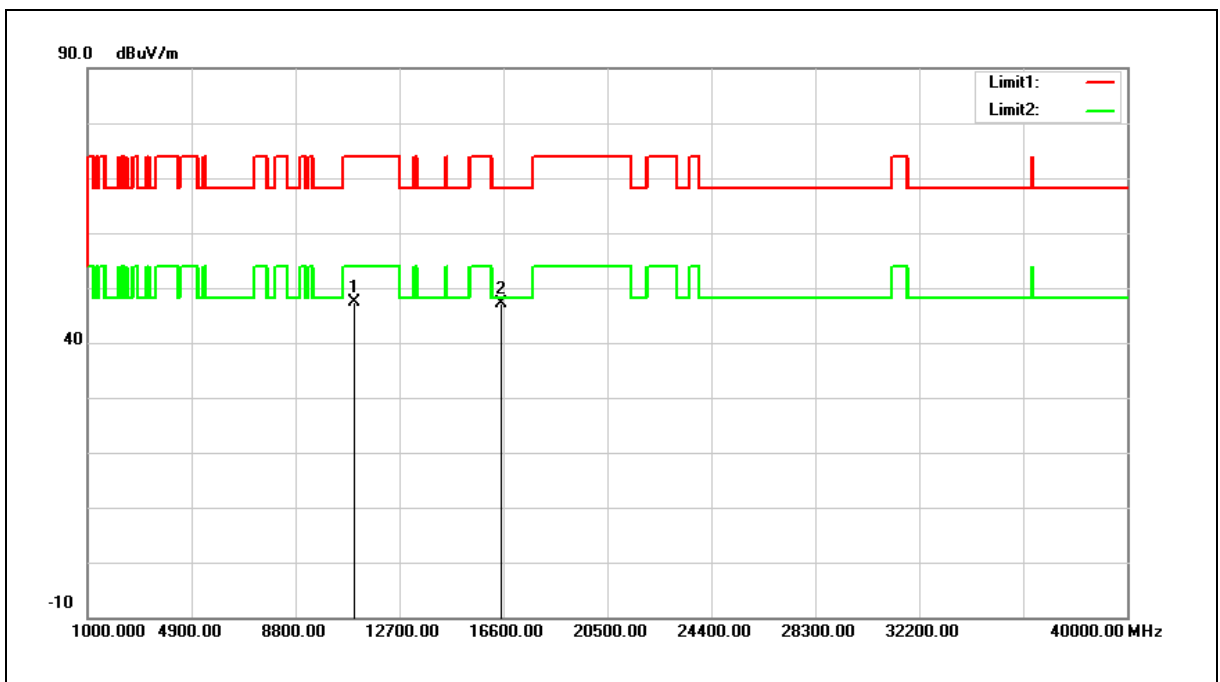


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.94	12.39	47.33	74.00	-26.67	peak
2	16500.000	32.93	14.24	47.17	68.20	-21.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

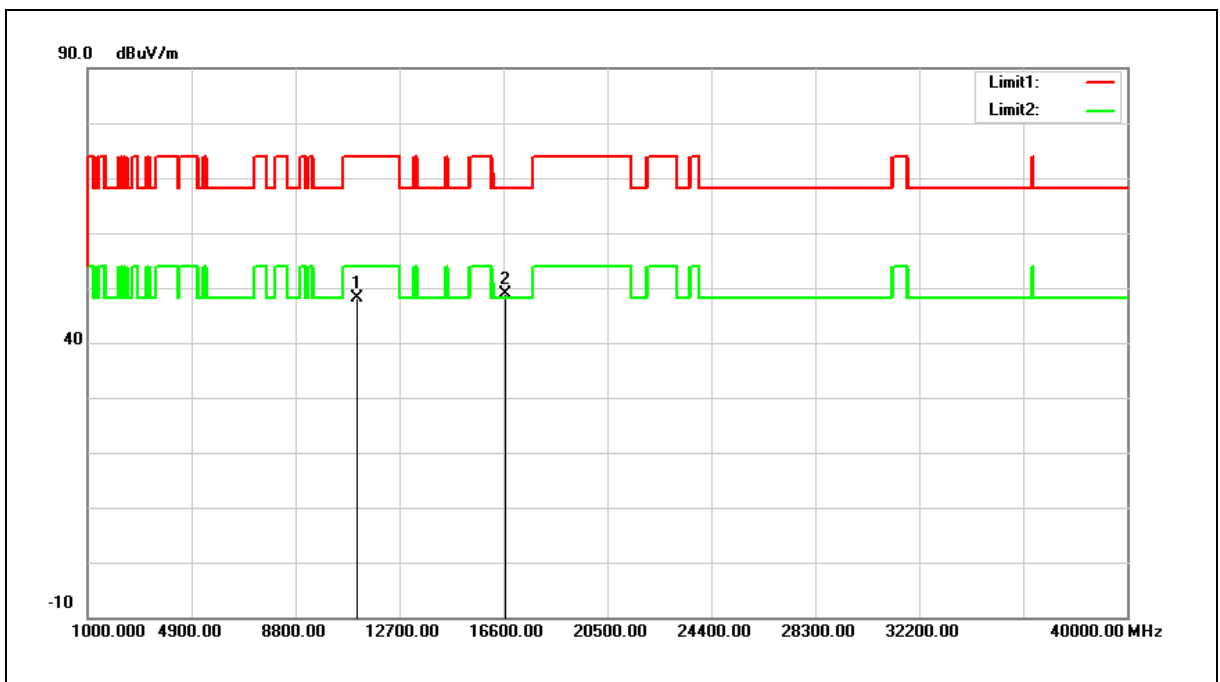


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	35.66	12.46	48.12	74.00	-25.88	peak
2	16680.000	33.55	15.22	48.77	68.20	-19.43	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

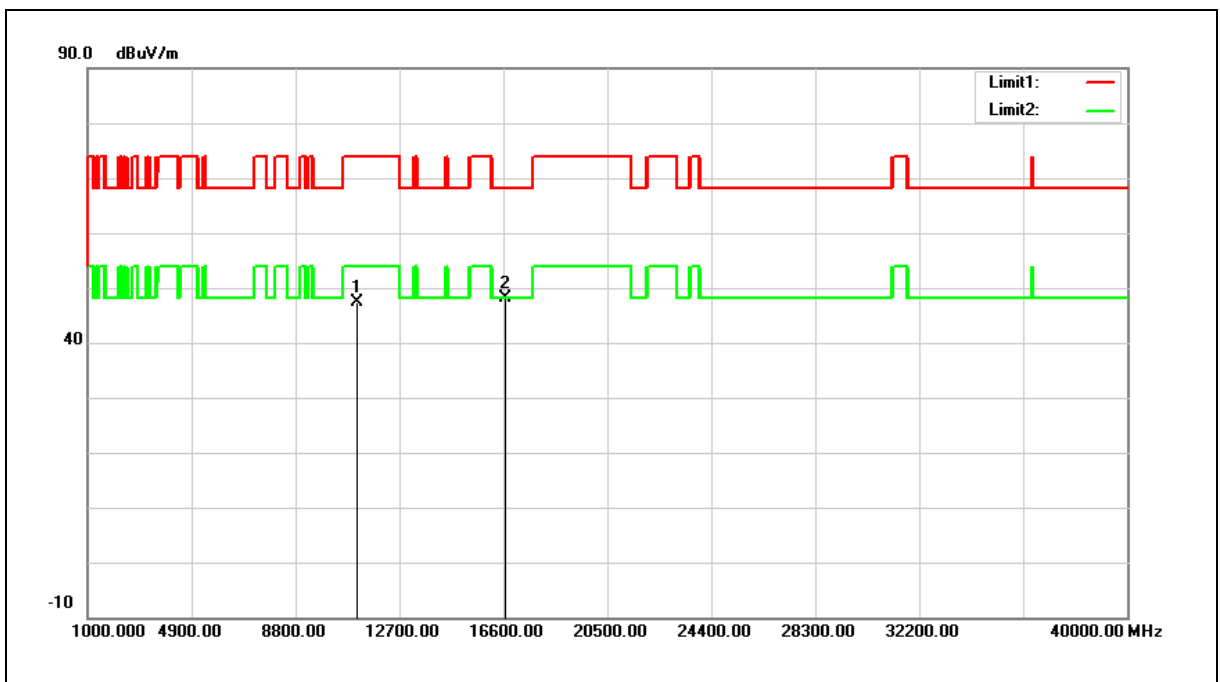


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	34.87	12.46	47.33	74.00	-26.67	peak
2	16680.000	32.85	15.22	48.07	68.20	-20.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

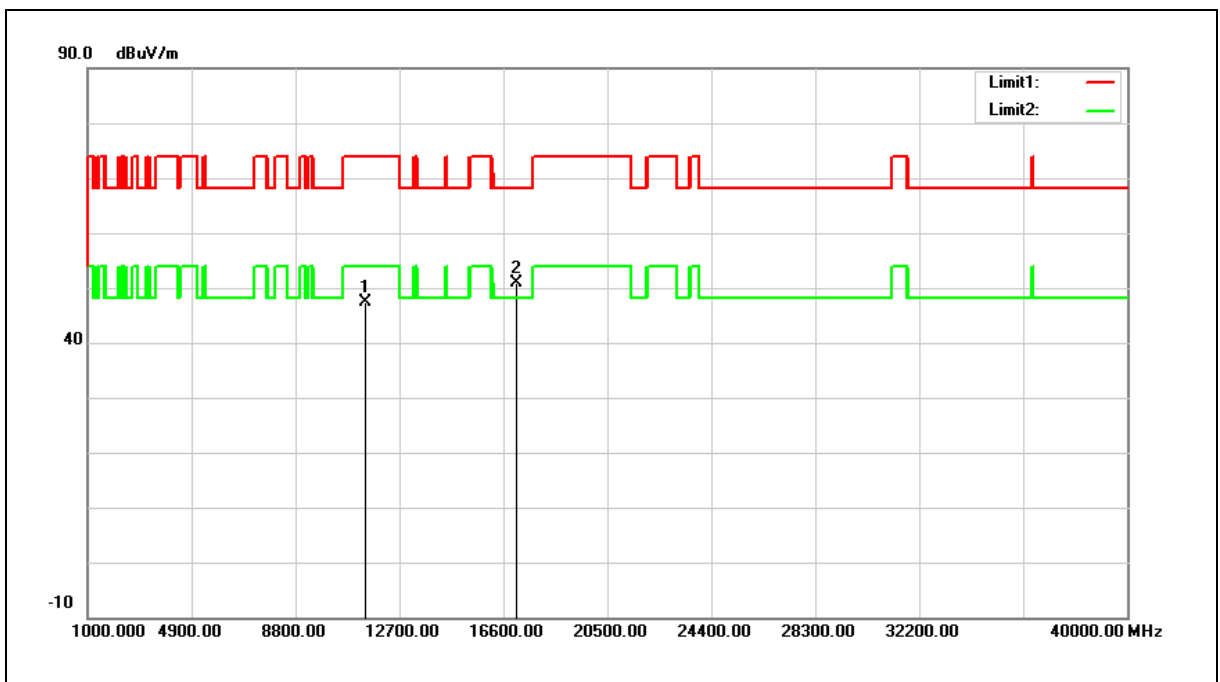


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	34.79	12.63	47.42	74.00	-26.58	peak
2	17100.000	33.30	17.63	50.93	68.20	-17.27	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

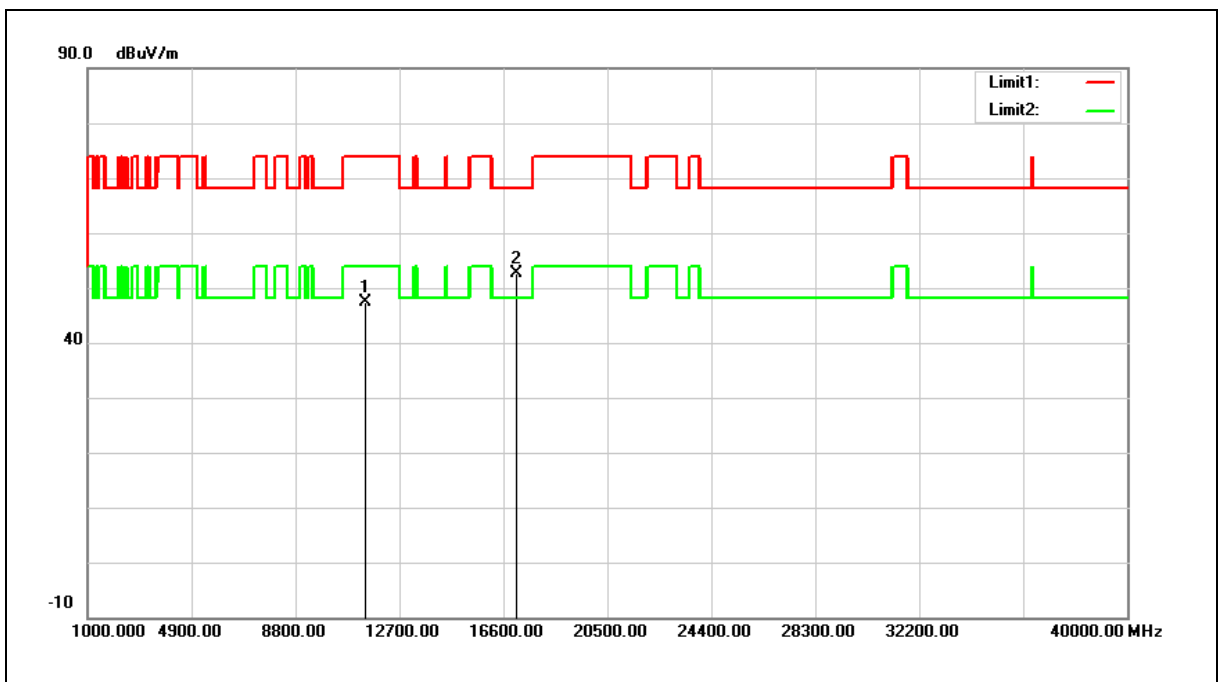


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	34.74	12.63	47.37	74.00	-26.63	peak
2	17100.000	34.89	17.63	52.52	68.20	-15.68	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

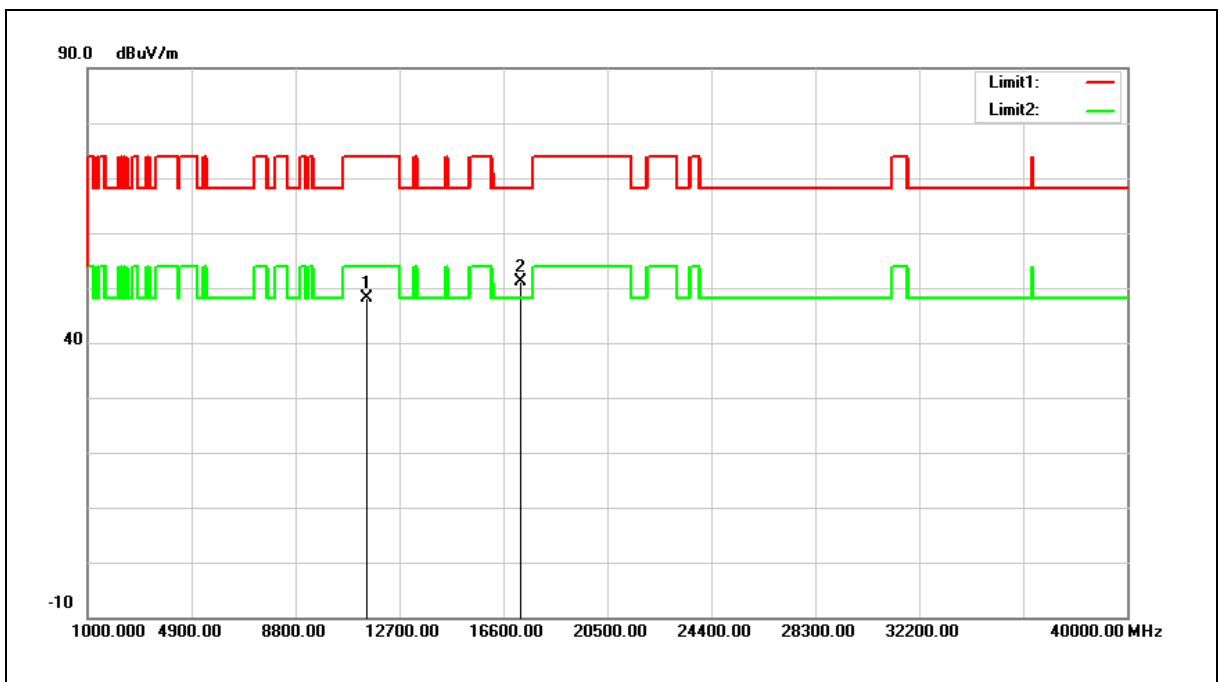


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.45	12.68	48.13	74.00	-25.87	peak
2	17235.000	32.66	18.52	51.18	68.20	-17.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

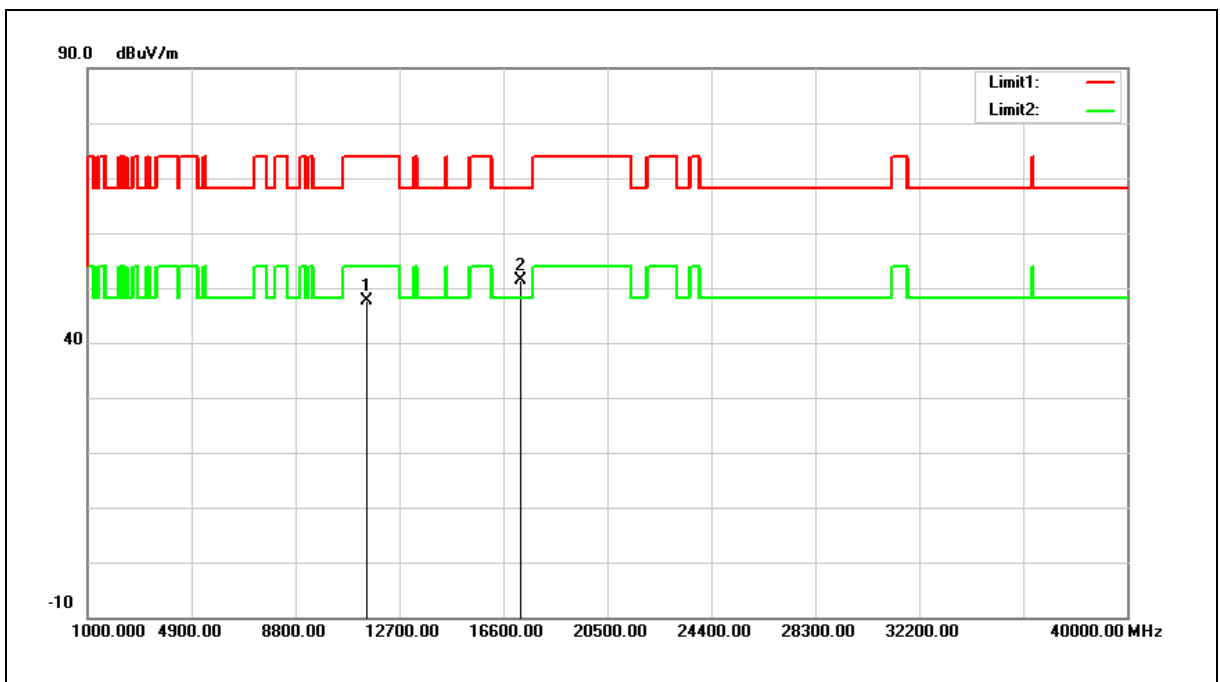


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	34.85	12.68	47.53	74.00	-26.47	peak
2	17235.000	32.78	18.52	51.30	68.20	-16.90	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

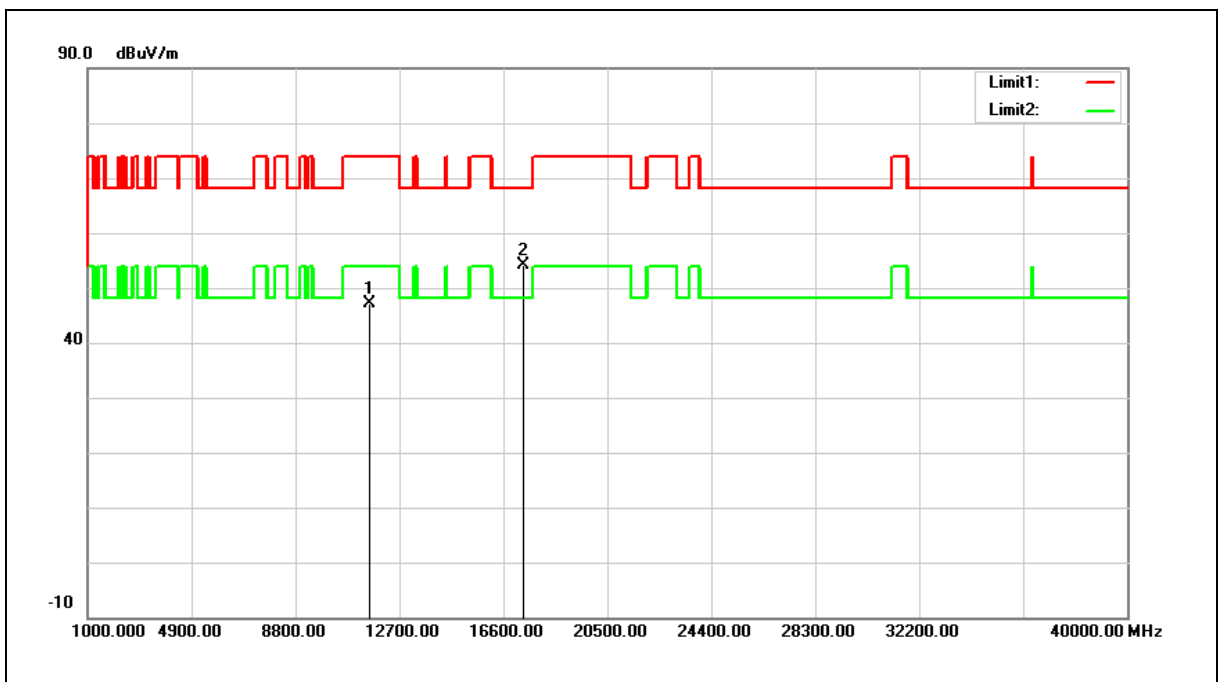


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	34.52	12.59	47.11	74.00	-26.89	peak
2	17355.000	34.72	19.32	54.04	68.20	-14.16	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

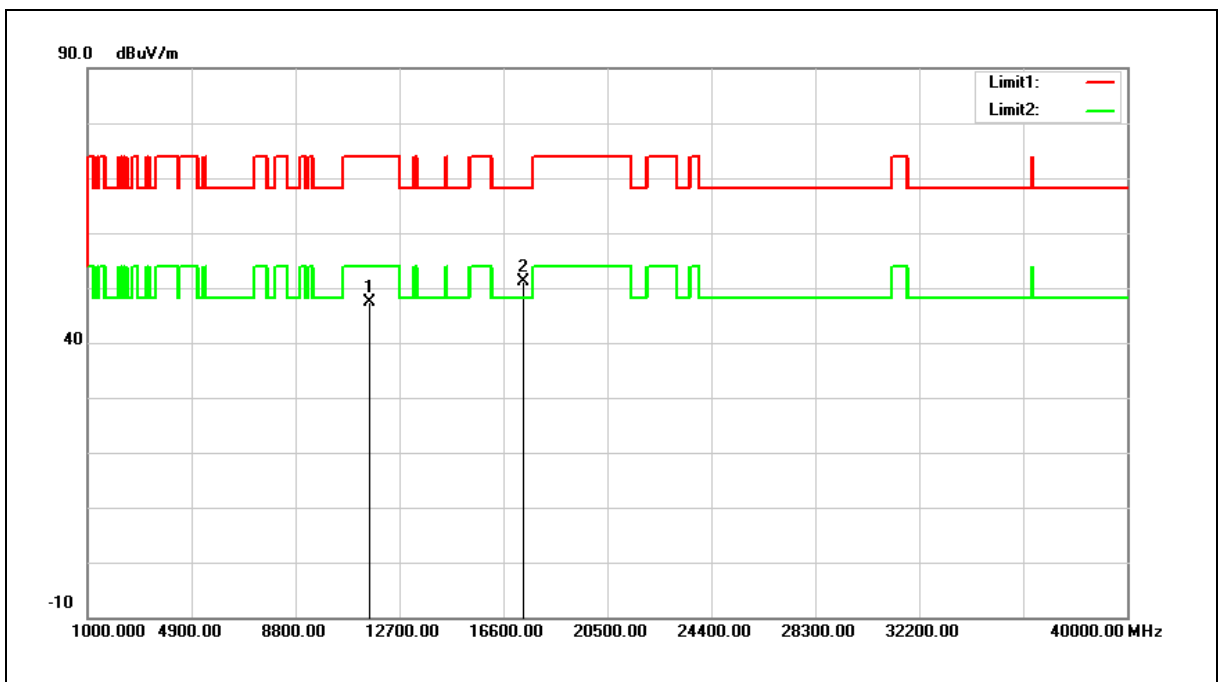


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	34.67	12.59	47.26	74.00	-26.74	peak
2	17355.000	31.76	19.32	51.08	68.20	-17.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

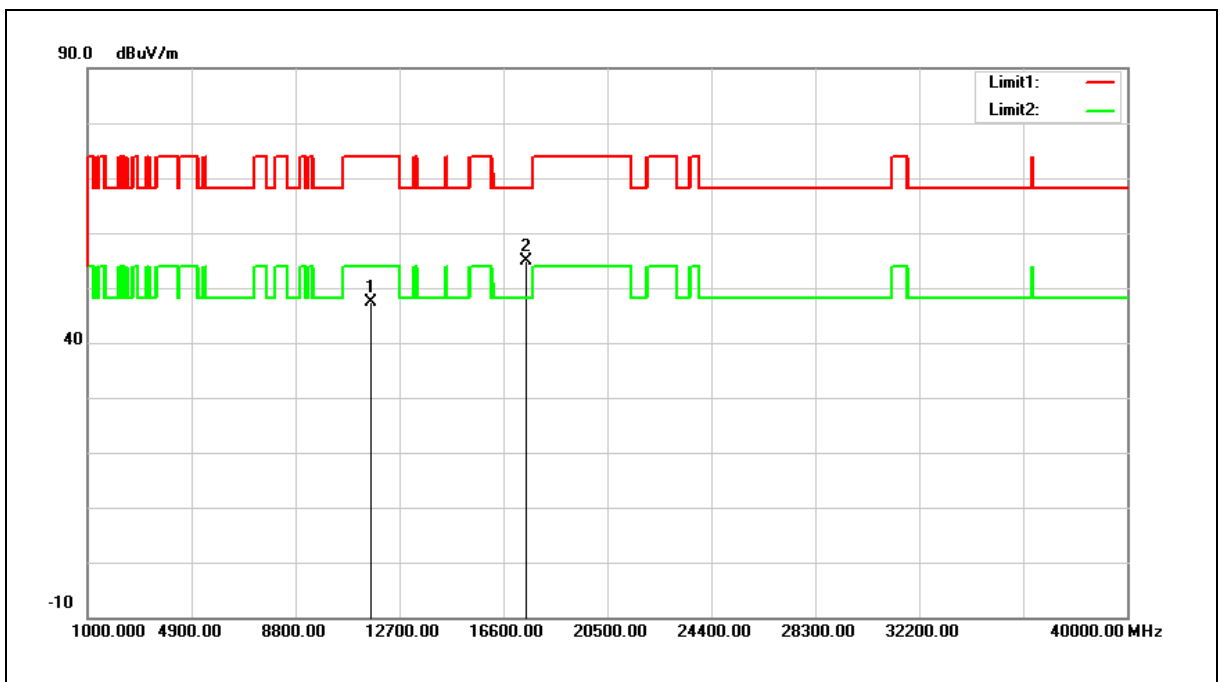


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.91	12.48	47.39	74.00	-26.61	peak
2	17475.000	34.84	20.13	54.97	68.20	-13.23	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

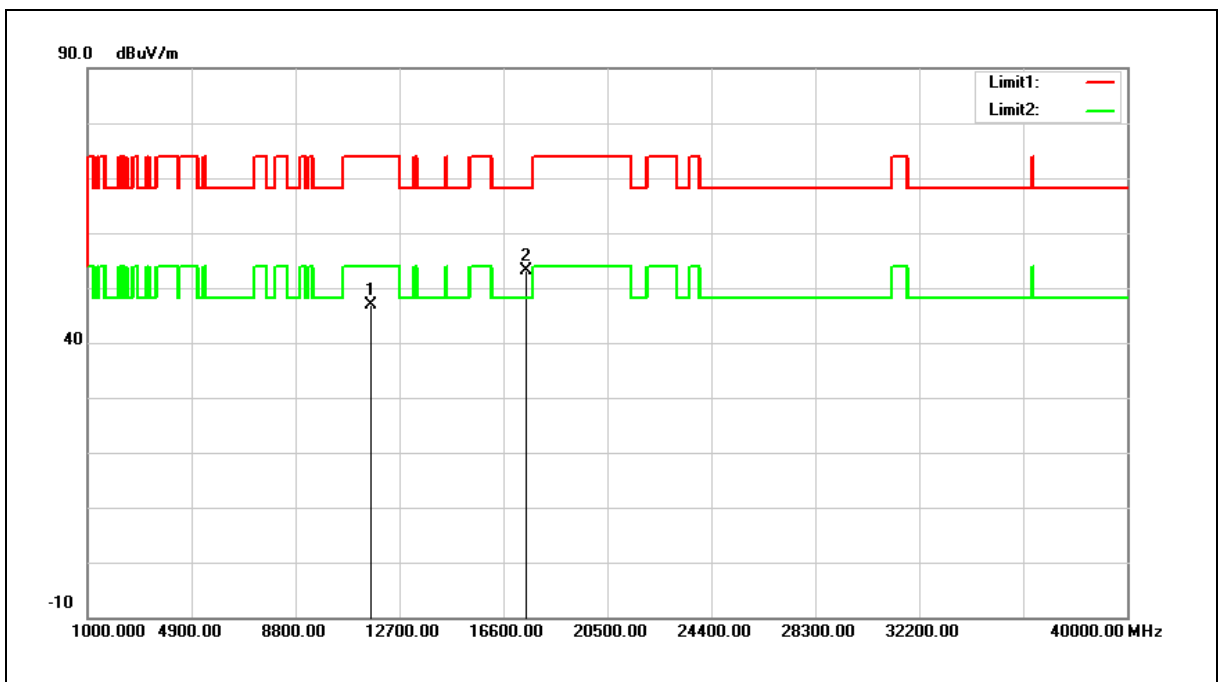


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.39	12.48	46.87	74.00	-27.13	peak
2	17475.000	33.08	20.13	53.21	68.20	-14.99	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

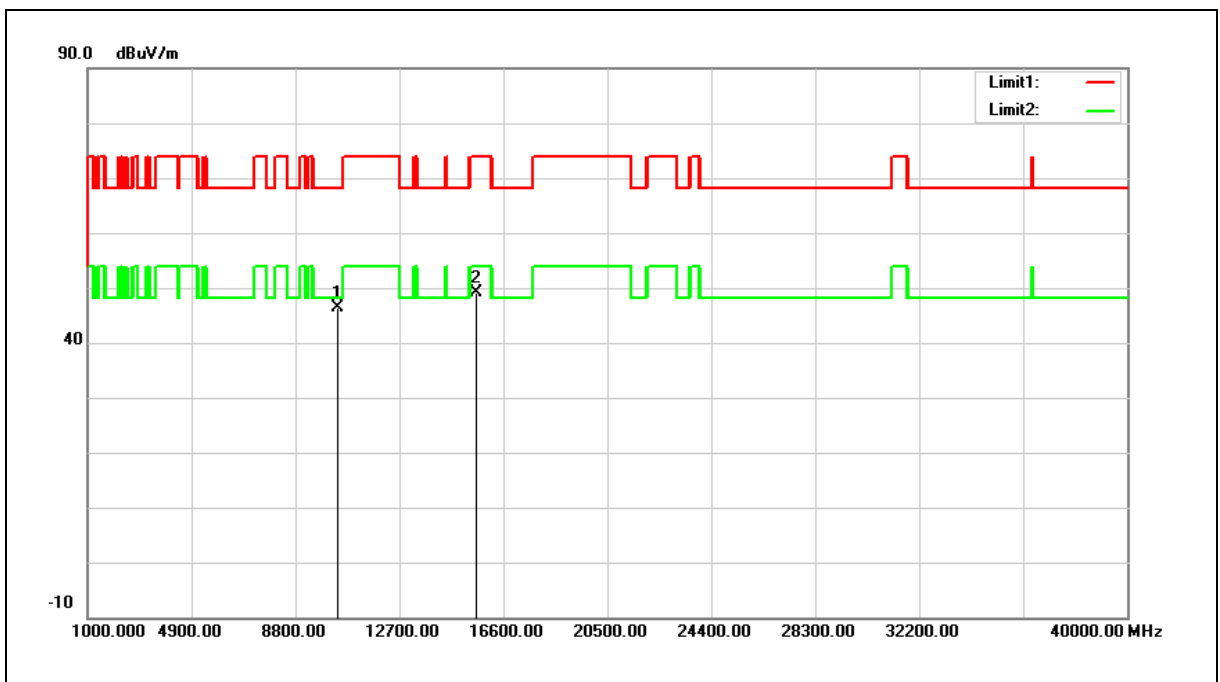


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	34.64	11.75	46.39	68.20	-21.81	peak
2	15570.000	34.63	14.45	49.08	74.00	-24.92	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

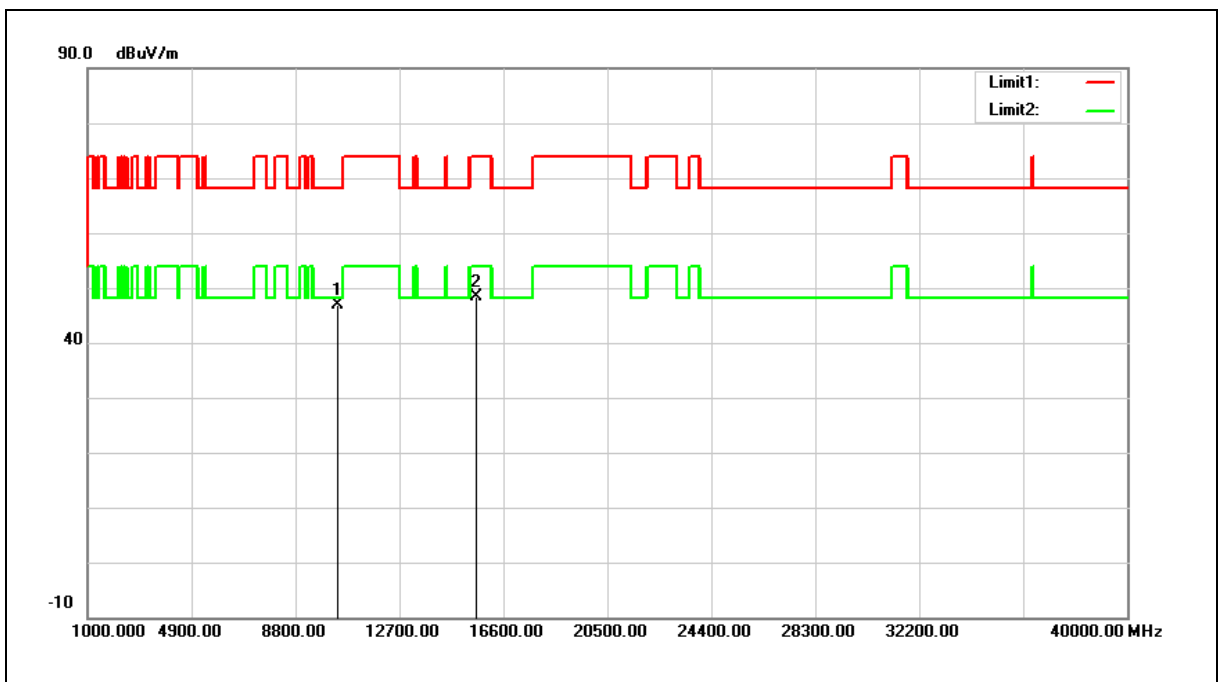


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	35.09	11.75	46.84	68.20	-21.36	peak
2	15570.000	33.91	14.45	48.36	74.00	-25.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

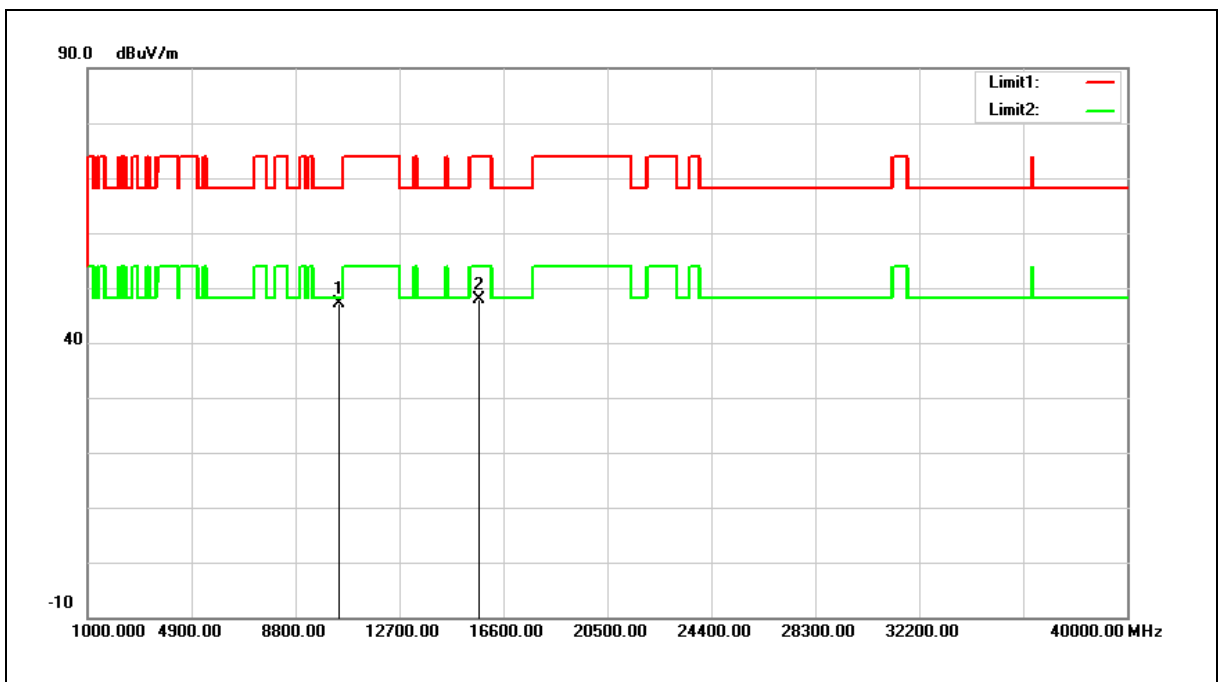


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	35.09	11.95	47.04	68.20	-21.16	peak
2	15690.000	33.72	14.19	47.91	74.00	-26.09	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

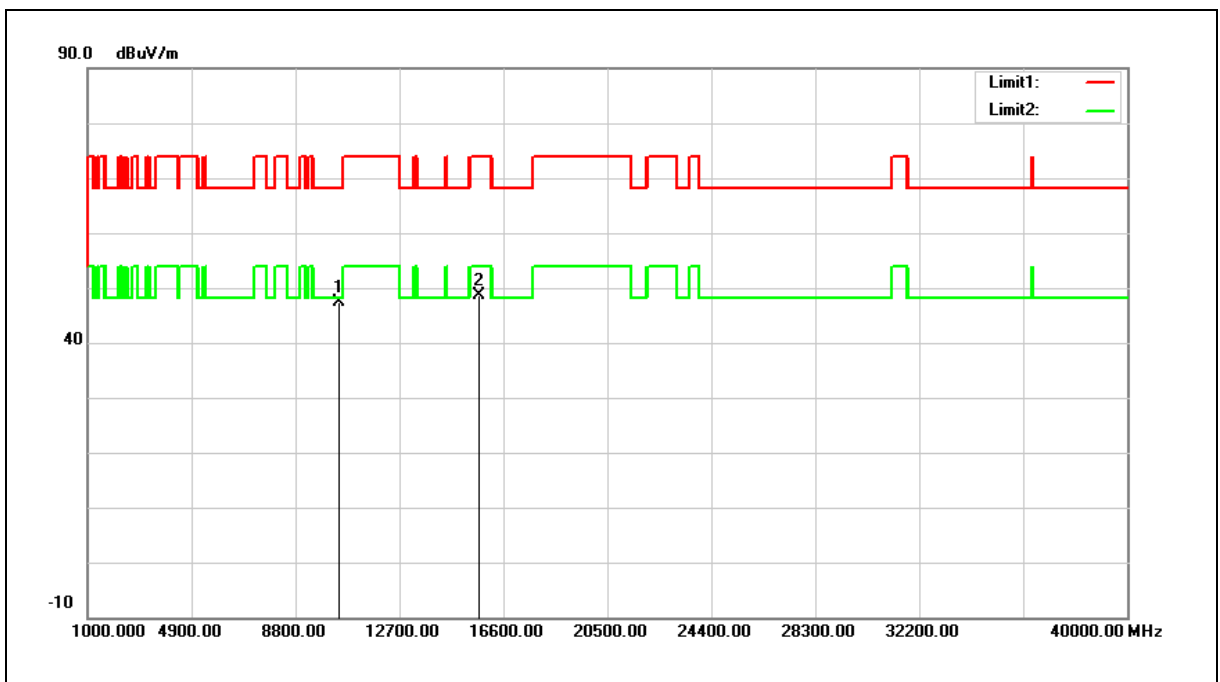


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	35.54	11.95	47.49	68.20	-20.71	peak
2	15690.000	34.41	14.19	48.60	74.00	-25.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

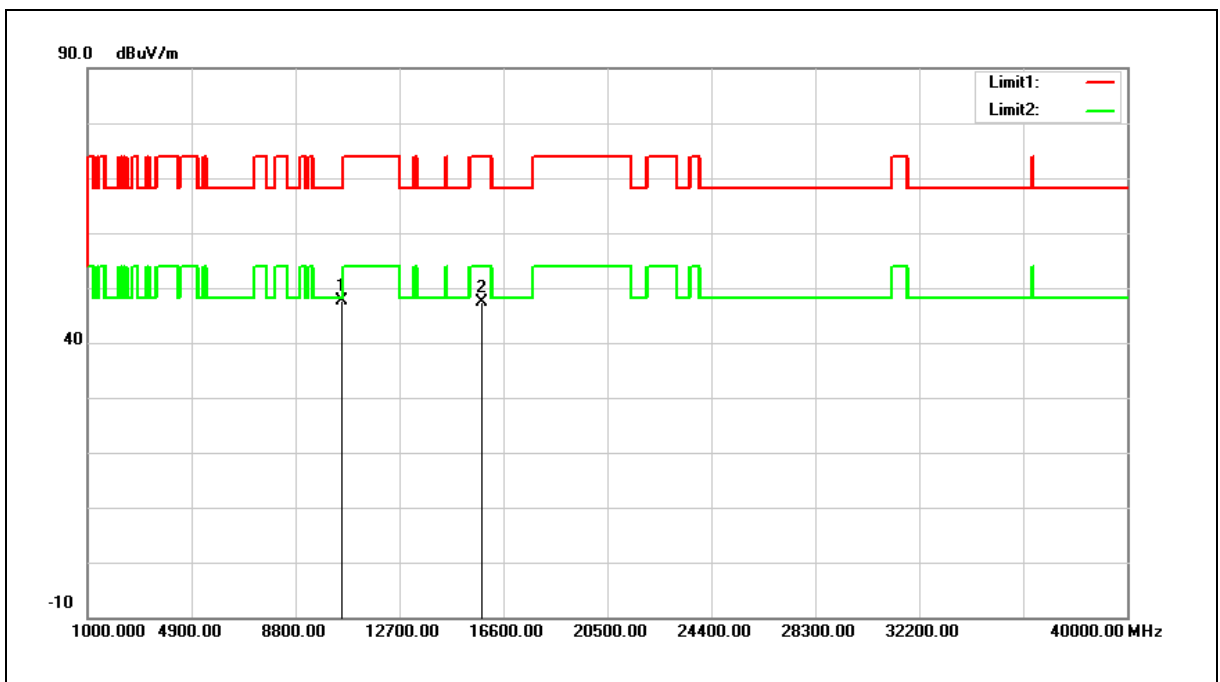


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	35.51	12.06	47.57	68.20	-20.63	peak
2	15810.000	33.34	13.96	47.30	74.00	-26.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

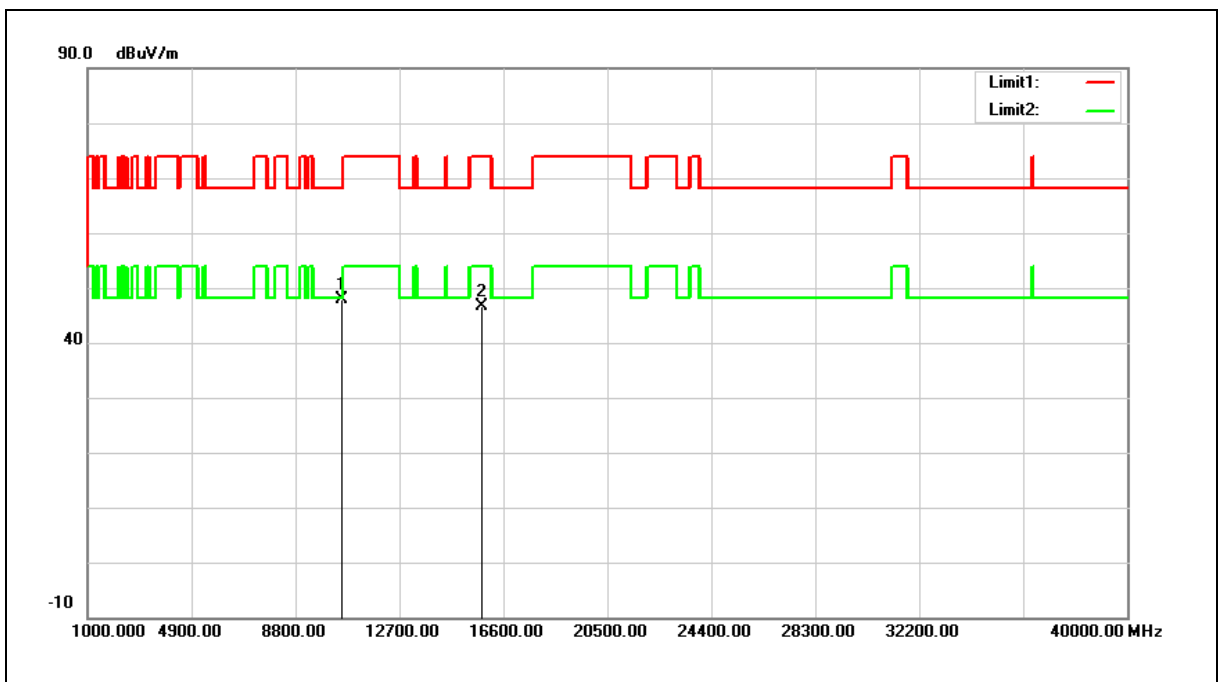


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	35.80	12.06	47.86	68.20	-20.34	peak
2	15810.000	32.77	13.96	46.73	74.00	-27.27	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

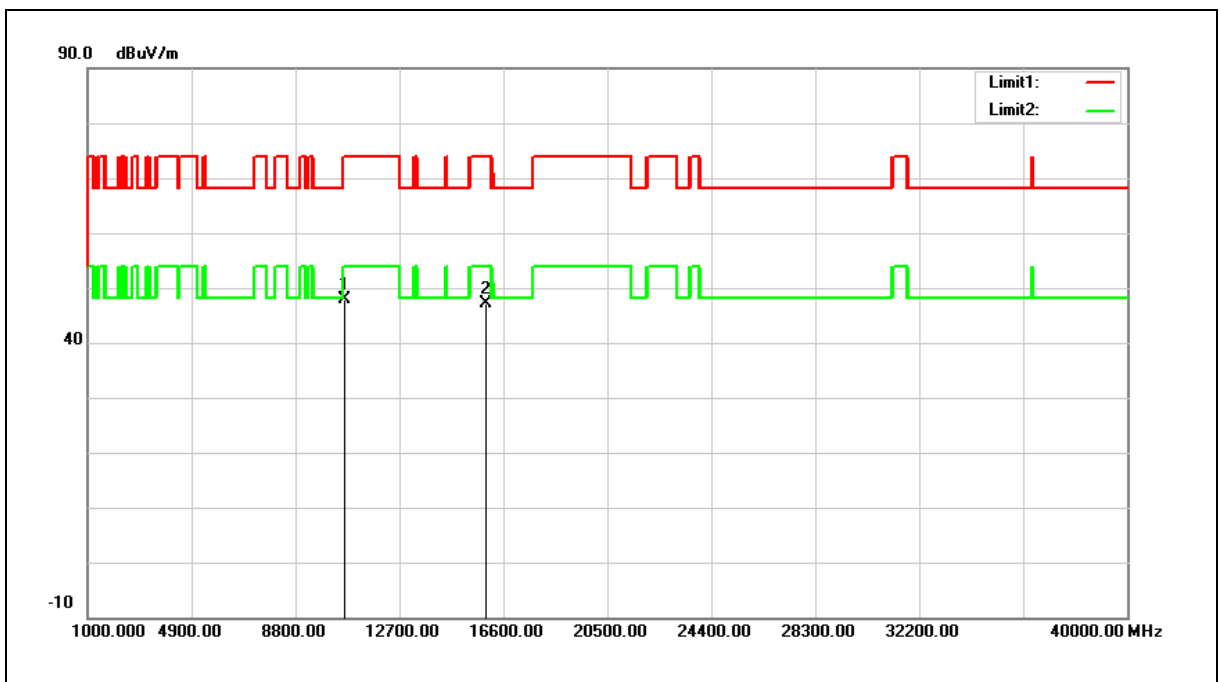


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	35.88	12.12	48.00	74.00	-26.00	peak
2	15930.000	33.35	13.70	47.05	74.00	-26.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

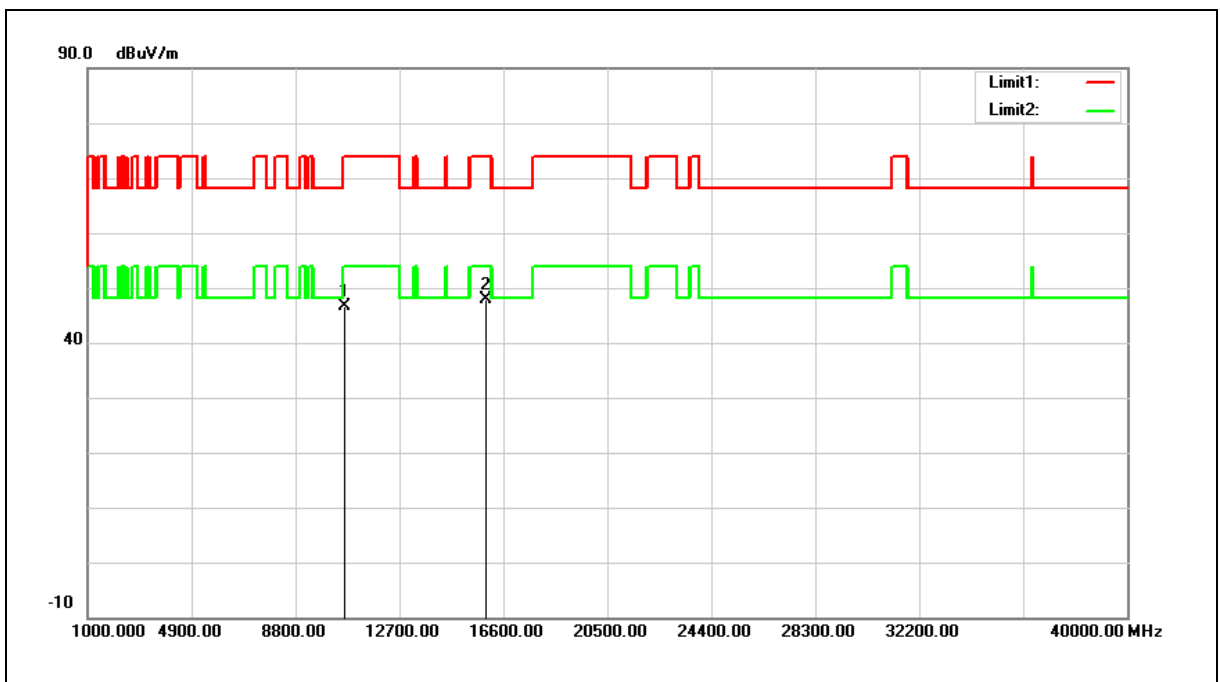


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	34.60	12.12	46.72	74.00	-27.28	peak
2	15930.000	34.10	13.70	47.80	74.00	-26.20	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

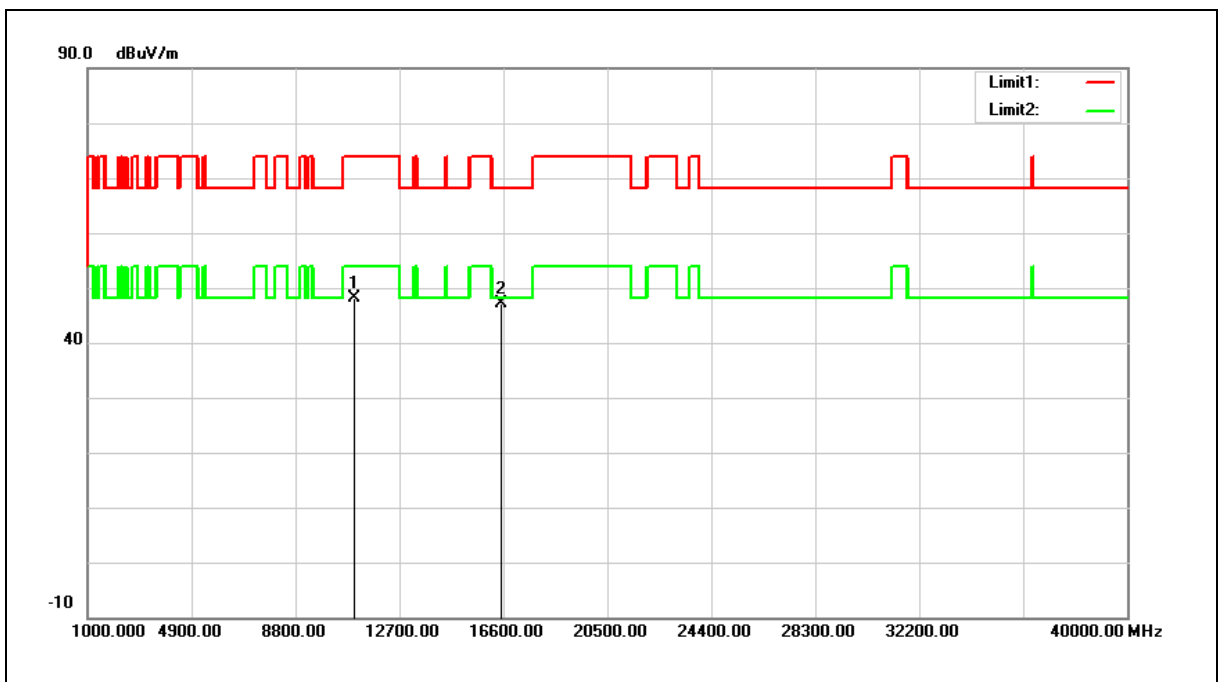


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	35.72	12.40	48.12	74.00	-25.88	peak
2	16530.000	32.69	14.41	47.10	68.20	-21.10	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

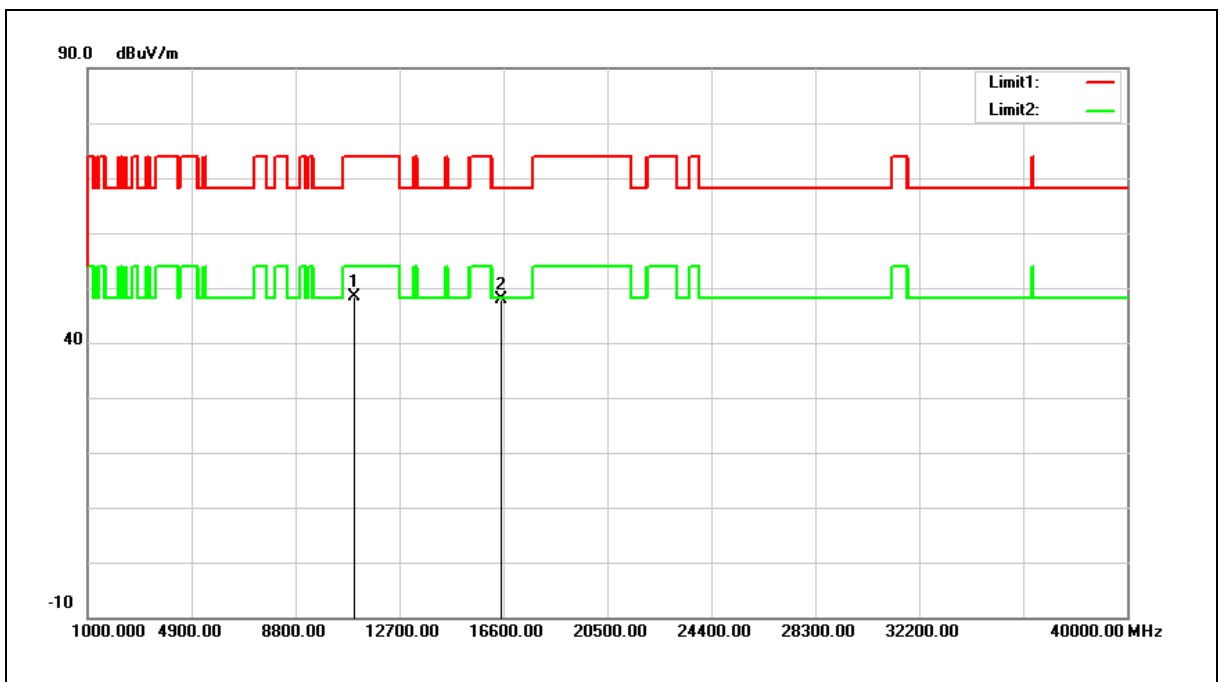


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	35.87	12.40	48.27	74.00	-25.73	peak
2	16530.000	33.58	14.41	47.99	68.20	-20.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

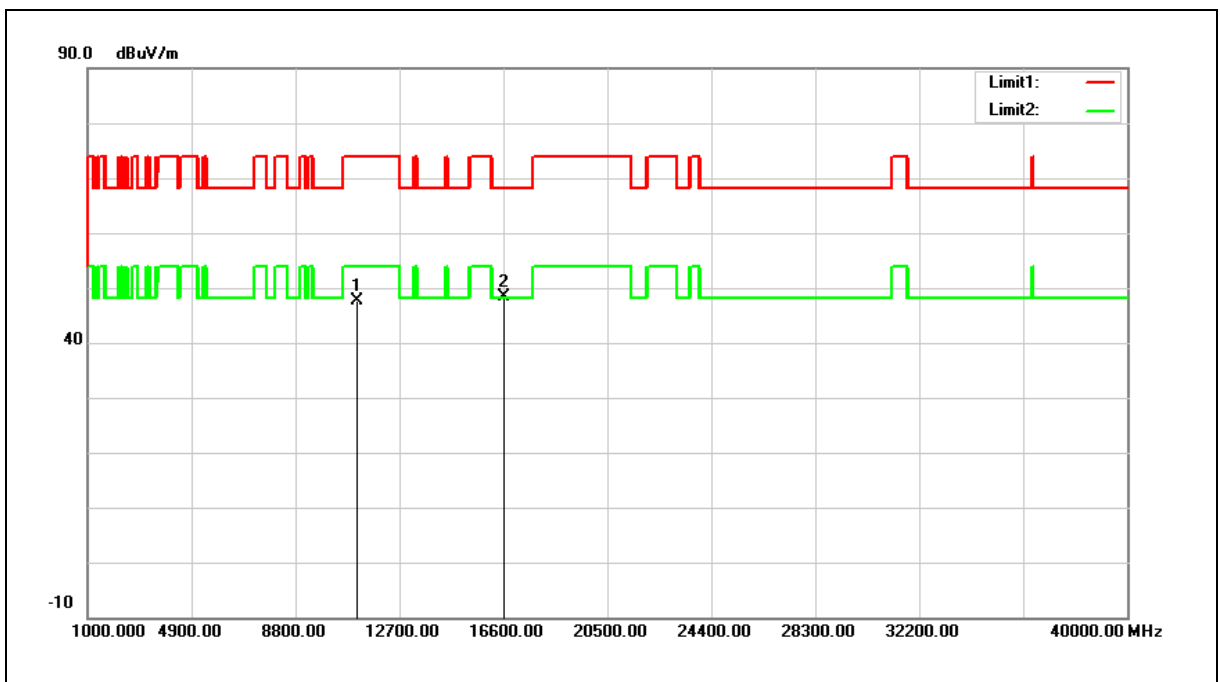


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	35.25	12.45	47.70	74.00	-26.30	peak
2	16650.000	33.31	15.06	48.37	68.20	-19.83	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

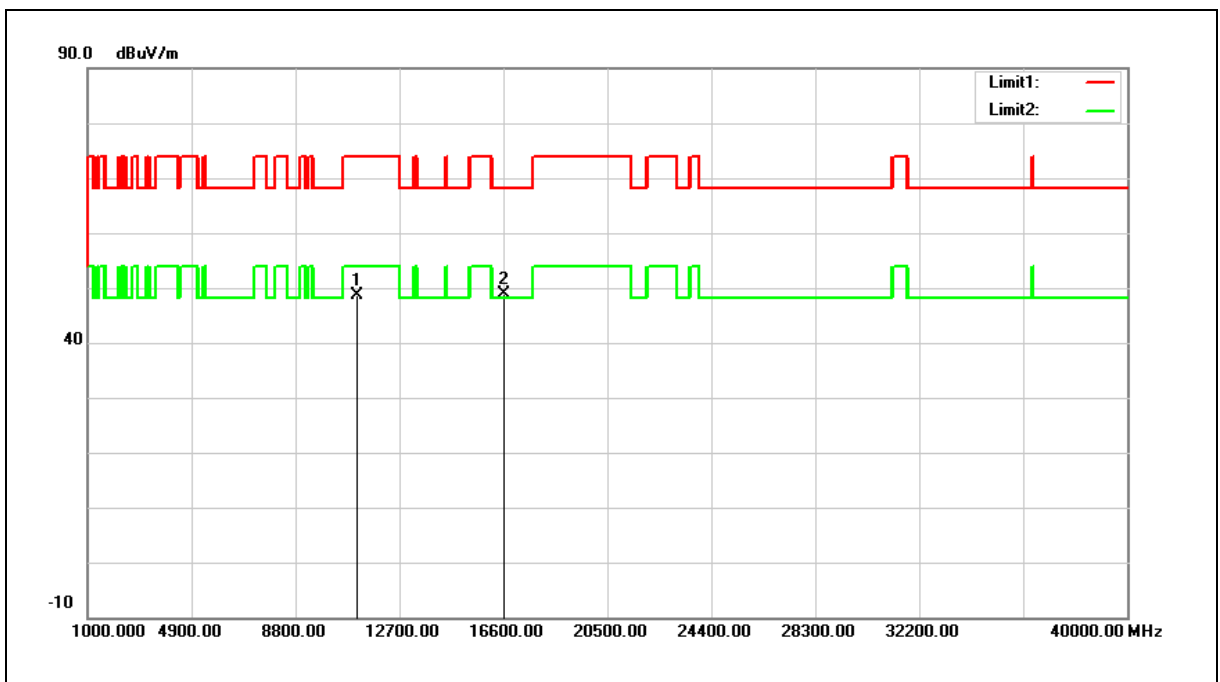


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	36.23	12.45	48.68	74.00	-25.32	peak
2	16650.000	33.88	15.06	48.94	68.20	-19.26	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

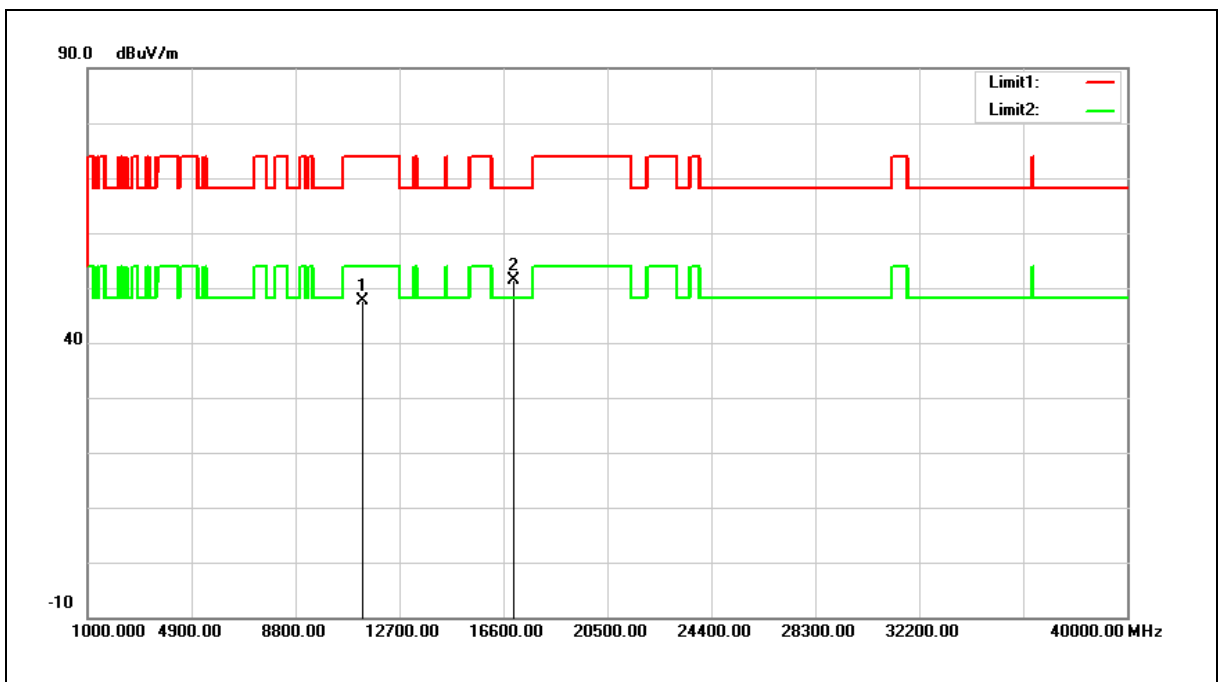


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	35.12	12.59	47.71	74.00	-26.29	peak
2	17010.000	34.31	17.02	51.33	68.20	-16.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

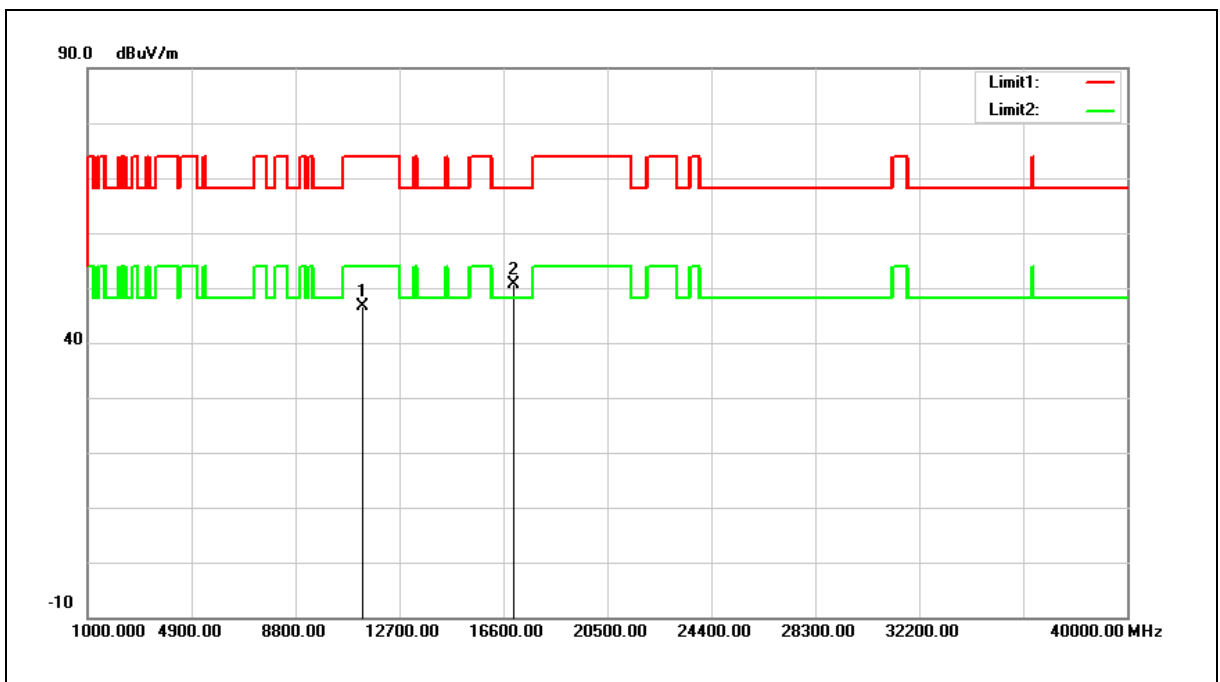


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	34.10	12.59	46.69	74.00	-27.31	peak
2	17010.000	33.59	17.02	50.61	68.20	-17.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

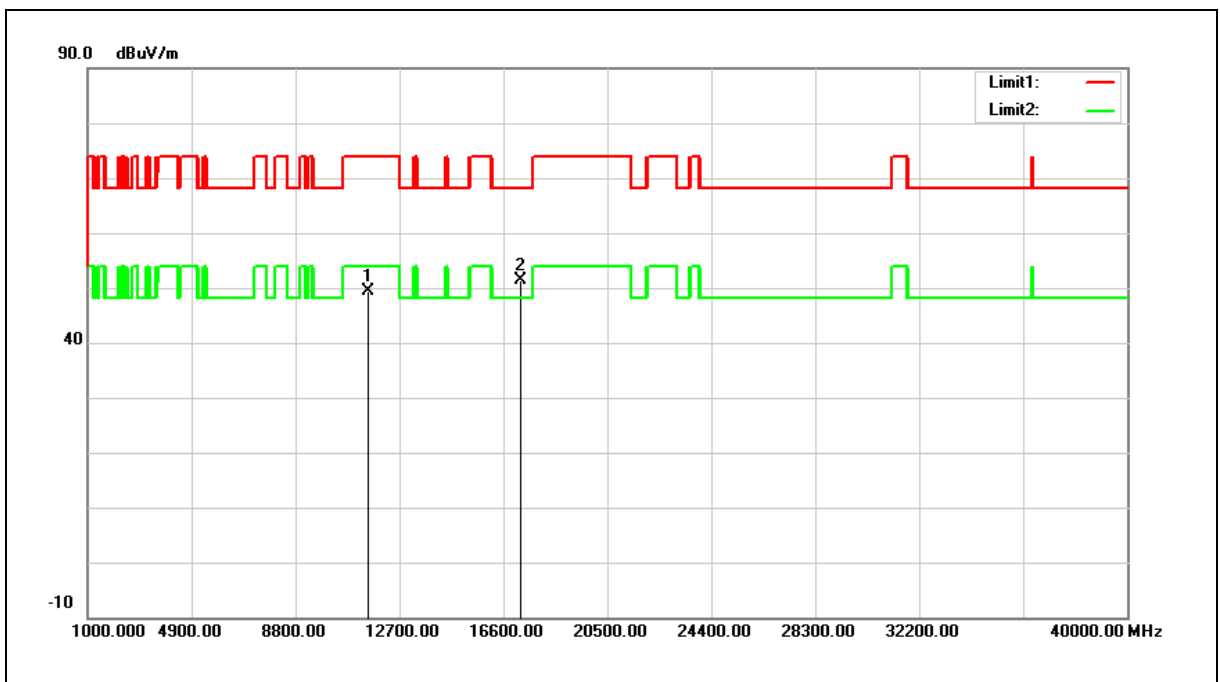


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	36.82	12.68	49.50	74.00	-24.50	peak
2	17265.000	32.66	18.72	51.38	68.20	-16.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

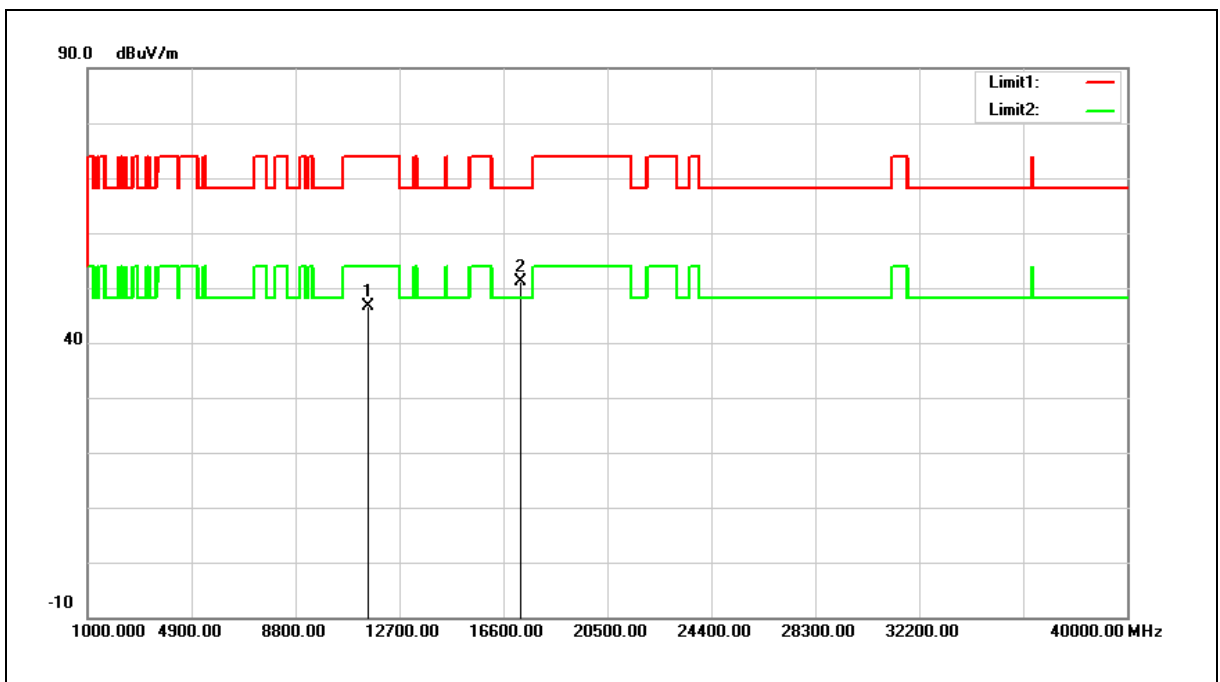


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	34.04	12.68	46.72	74.00	-27.28	peak
2	17265.000	32.39	18.72	51.11	68.20	-17.09	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

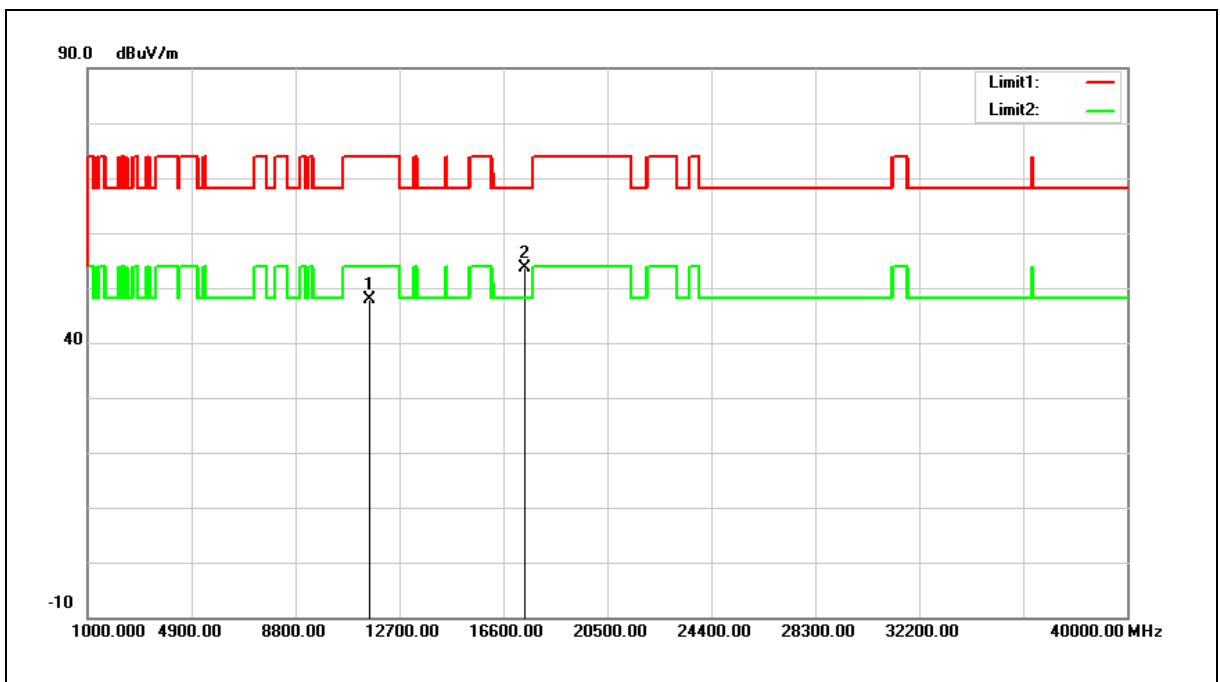


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	35.36	12.56	47.92	74.00	-26.08	peak
2	17385.000	34.06	19.52	53.58	68.20	-14.62	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

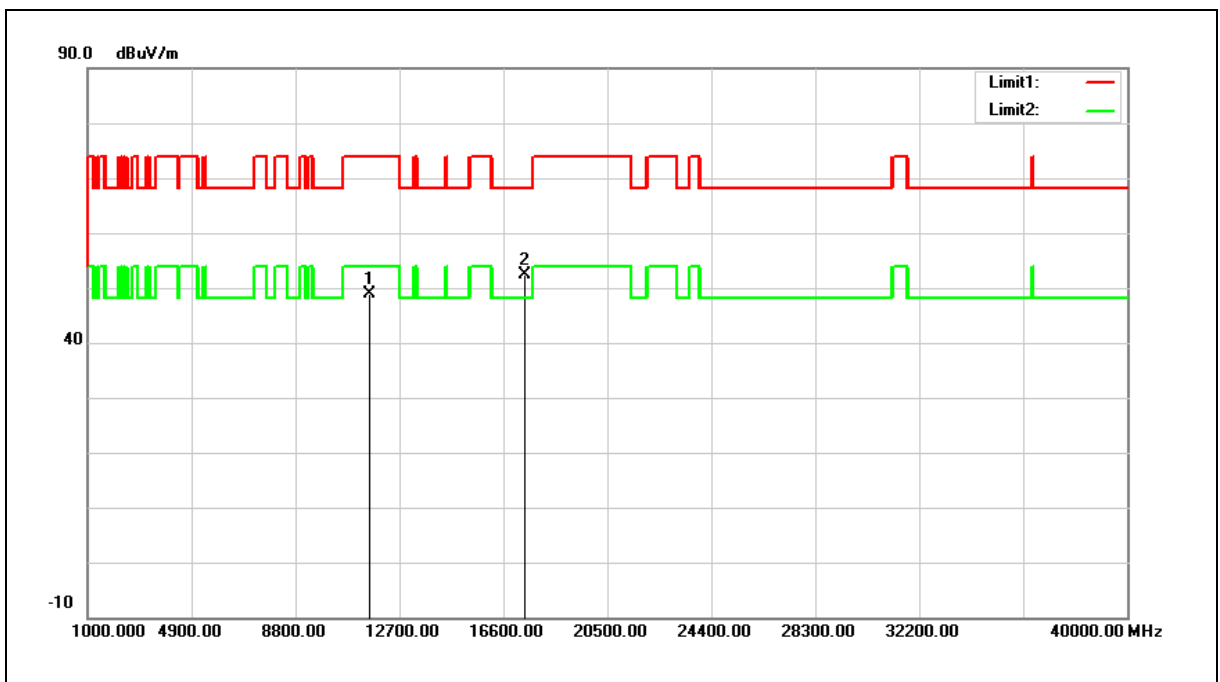


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	36.37	12.56	48.93	74.00	-25.07	peak
2	17385.000	32.89	19.52	52.41	68.20	-15.79	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

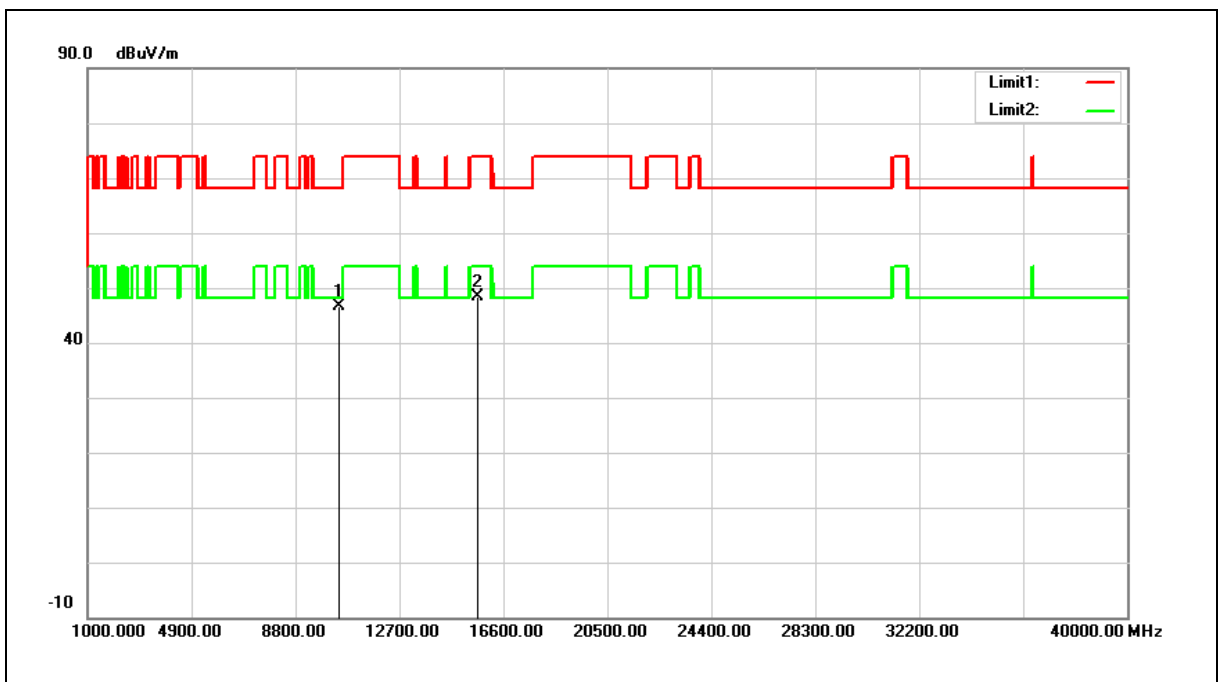


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	34.76	11.85	46.61	68.20	-21.59	peak
2	15630.000	34.05	14.33	48.38	74.00	-25.62	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

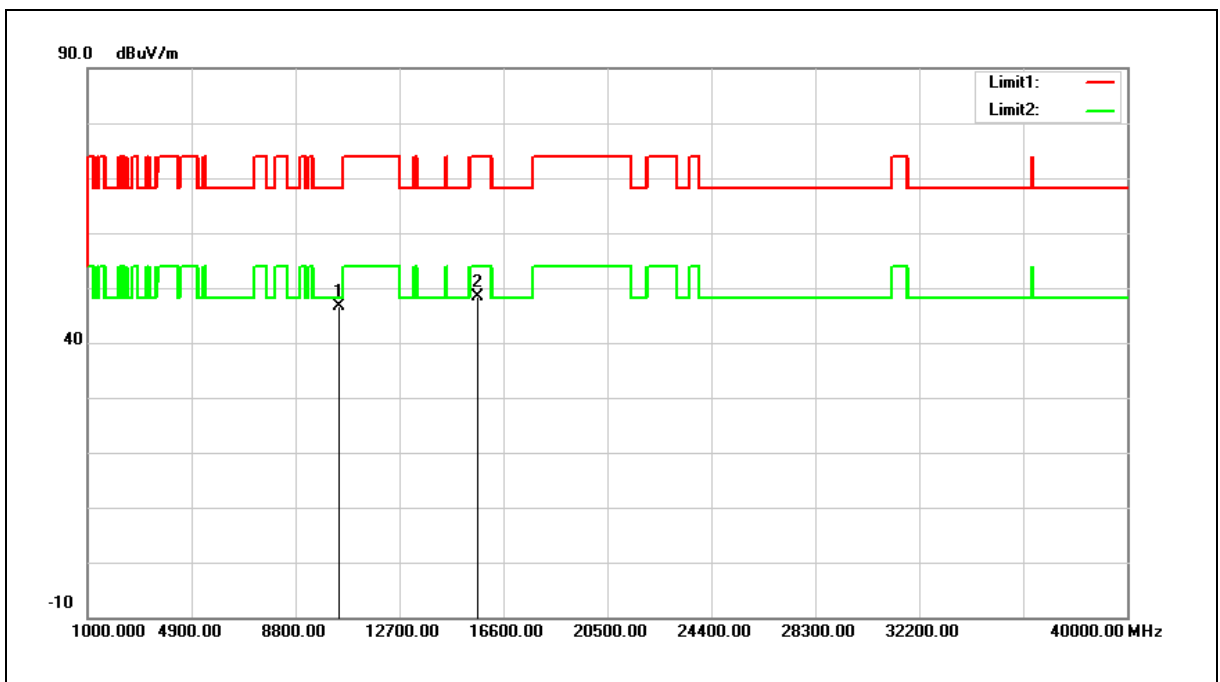


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	34.89	11.85	46.74	68.20	-21.46	peak
2	15630.000	34.16	14.33	48.49	74.00	-25.51	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

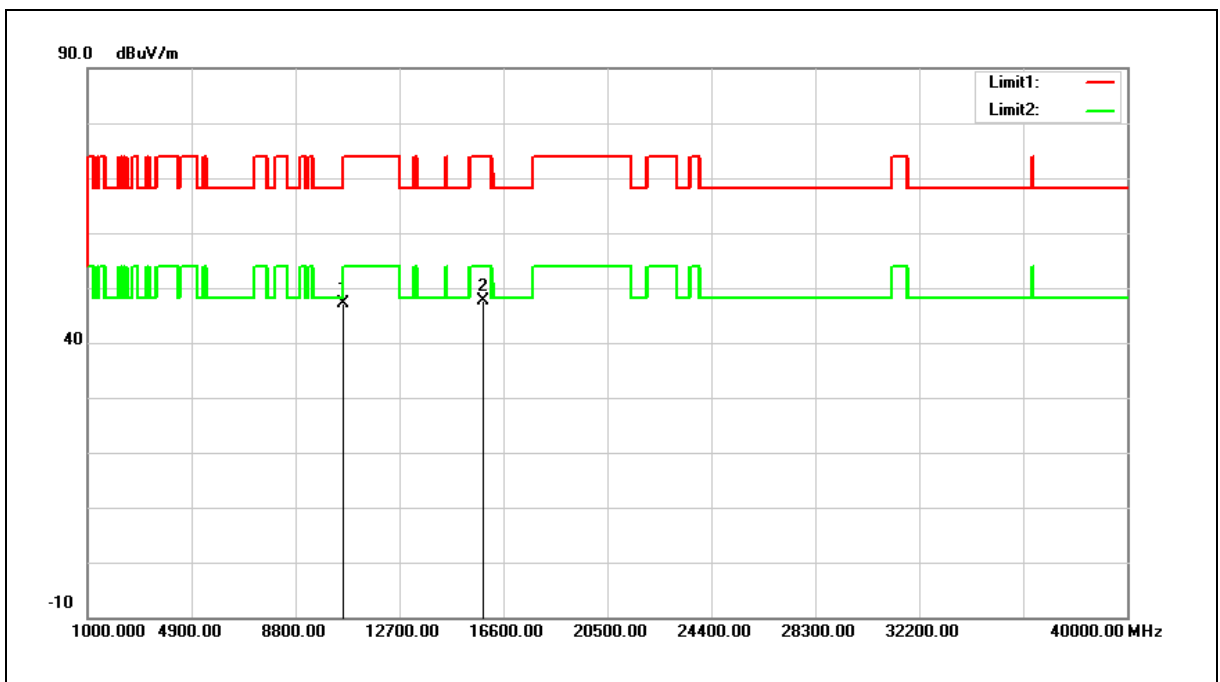


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	34.92	12.10	47.02	68.20	-21.18	peak
2	15870.000	33.70	13.82	47.52	74.00	-26.48	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

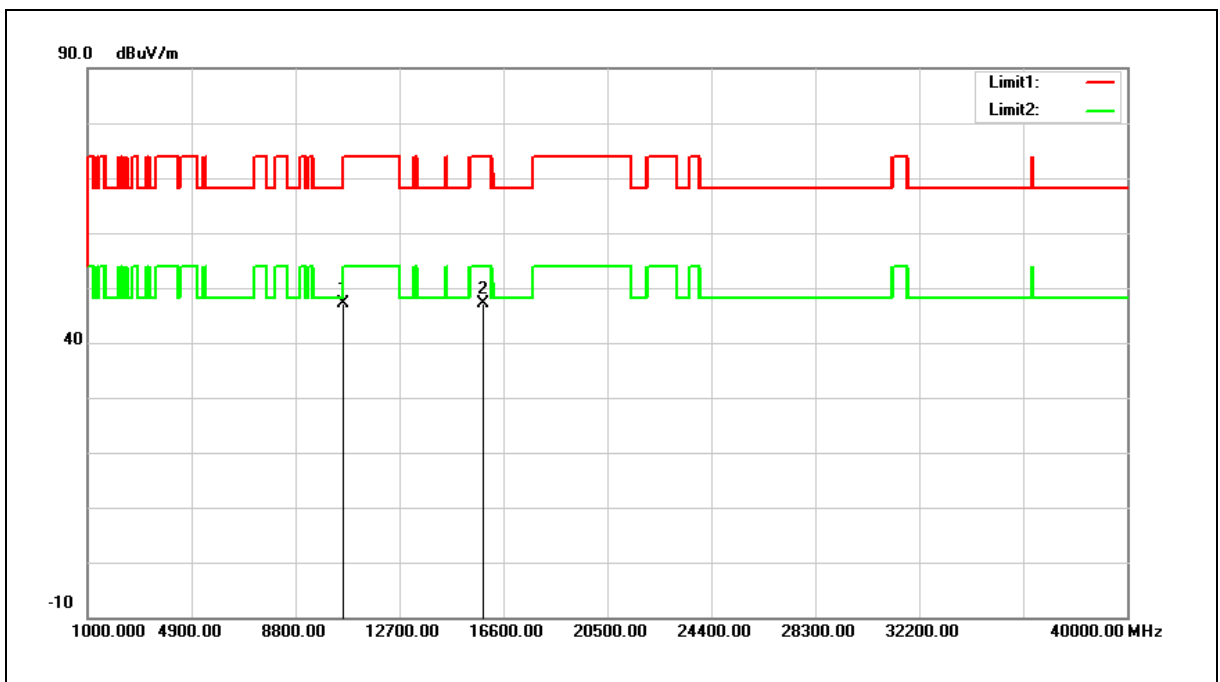


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	35.09	12.10	47.19	68.20	-21.01	peak
2	15870.000	33.24	13.82	47.06	74.00	-26.94	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

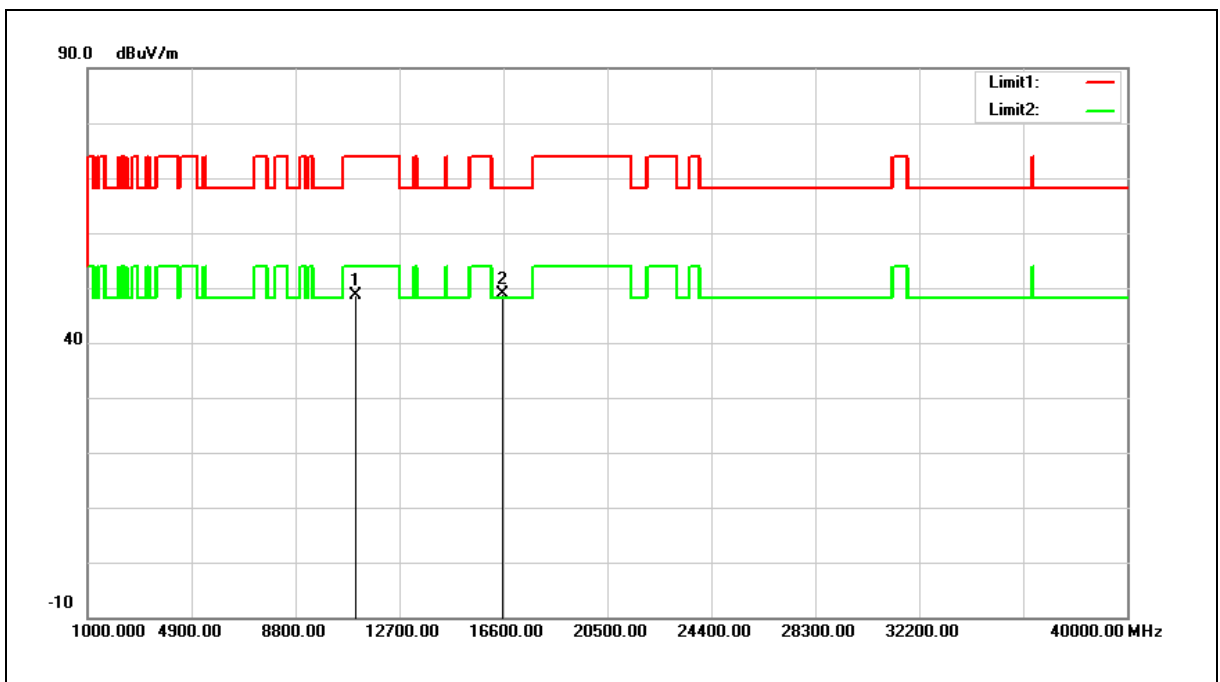


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	36.26	12.43	48.69	74.00	-25.31	peak
2	16590.000	34.22	14.73	48.95	68.20	-19.25	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

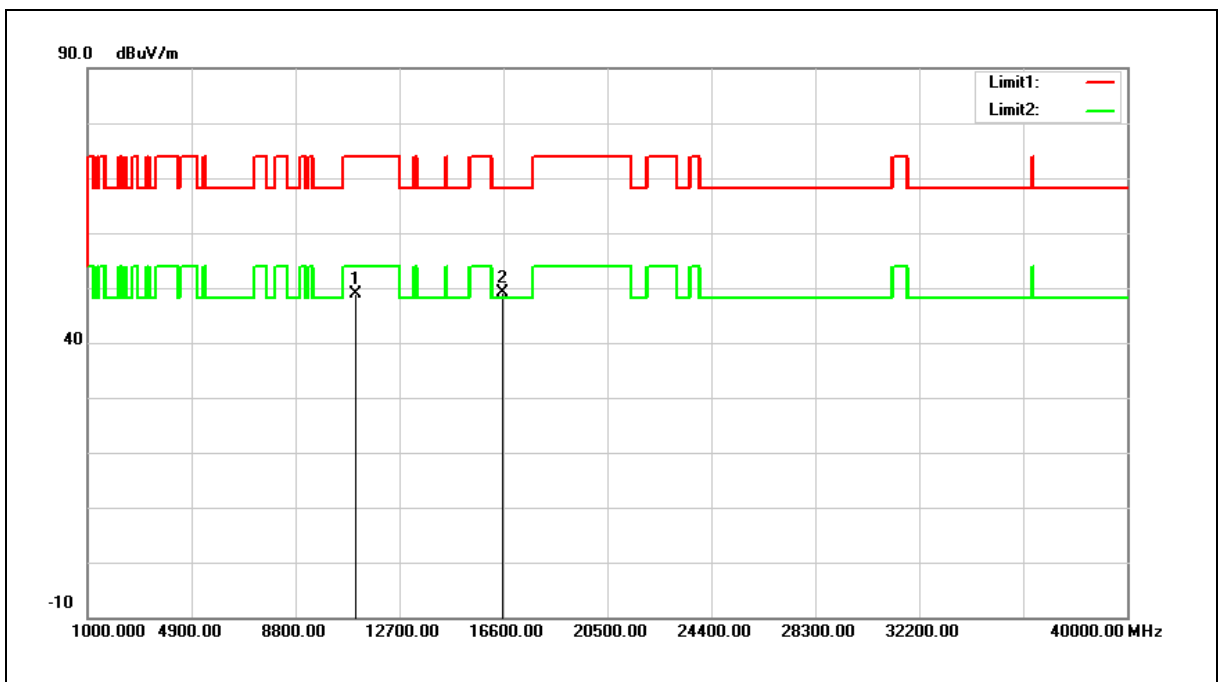


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	36.51	12.43	48.94	74.00	-25.06	peak
2	16590.000	34.42	14.73	49.15	68.20	-19.05	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

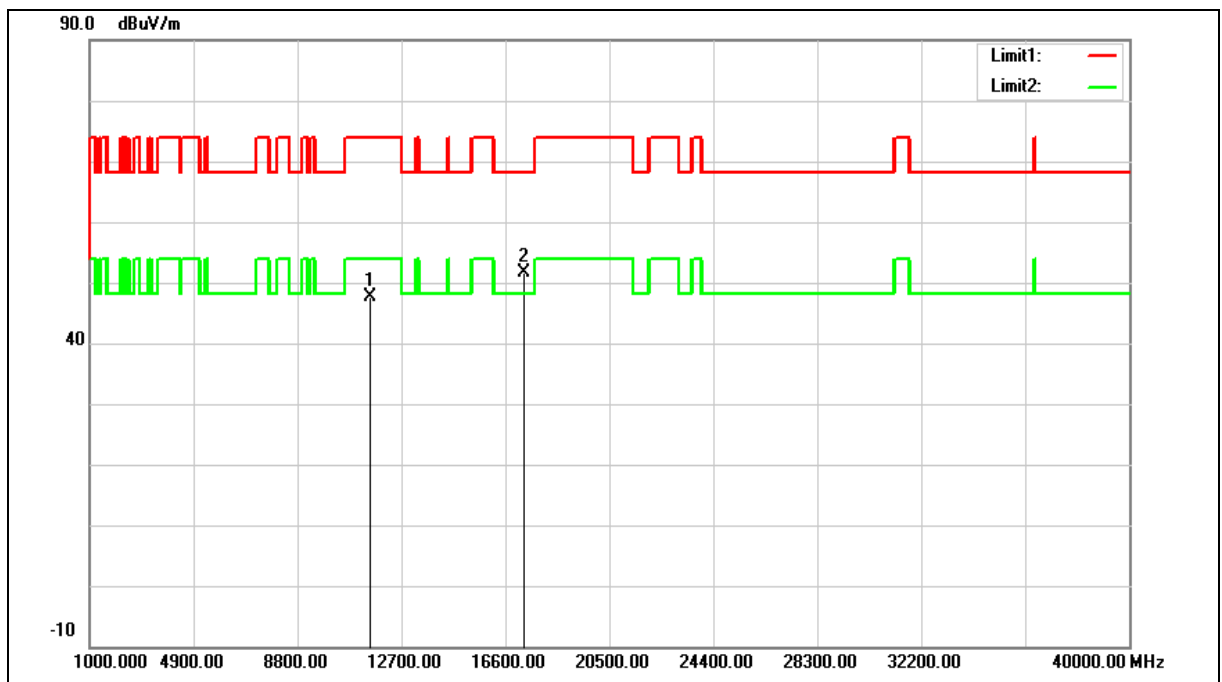


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	34.92	12.62	47.54	74.00	-26.46	peak
2	17325.000	32.52	19.12	51.64	68.20	-16.56	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

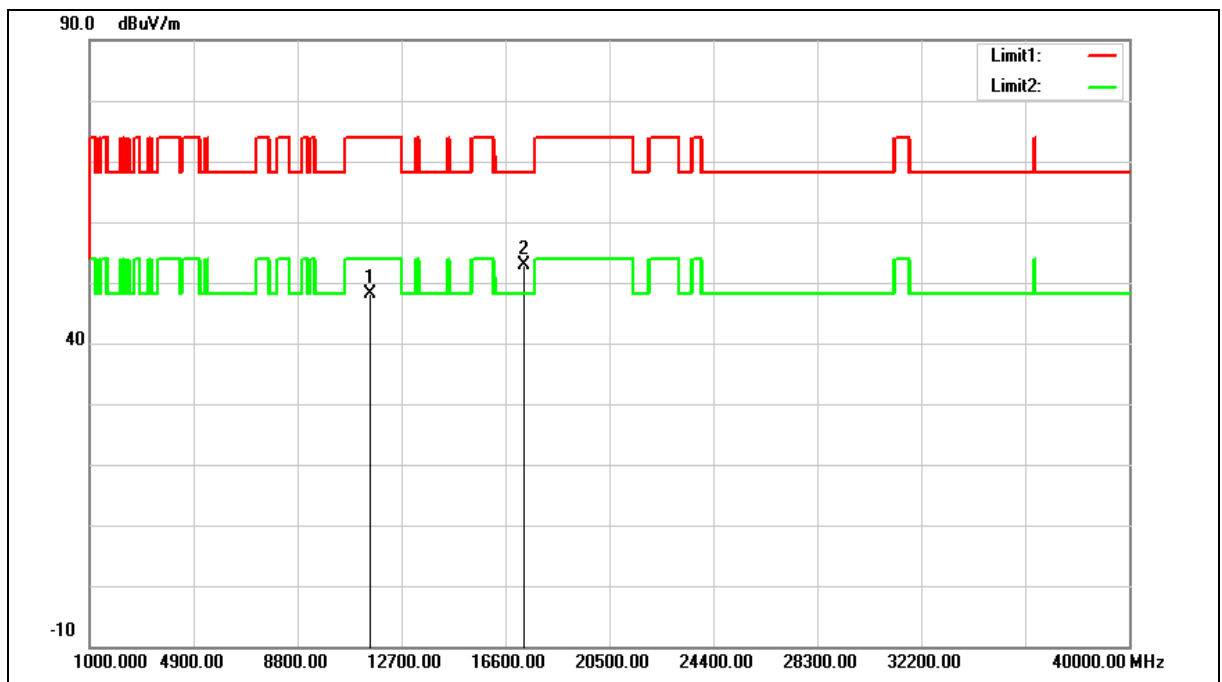


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	35.45	12.62	48.07	74.00	-25.93	peak
2	17325.000	33.66	19.12	52.78	68.20	-15.42	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting (WLAN 5 GHz + Bluetooth)		
Ant.Polar.:	Horizontal		

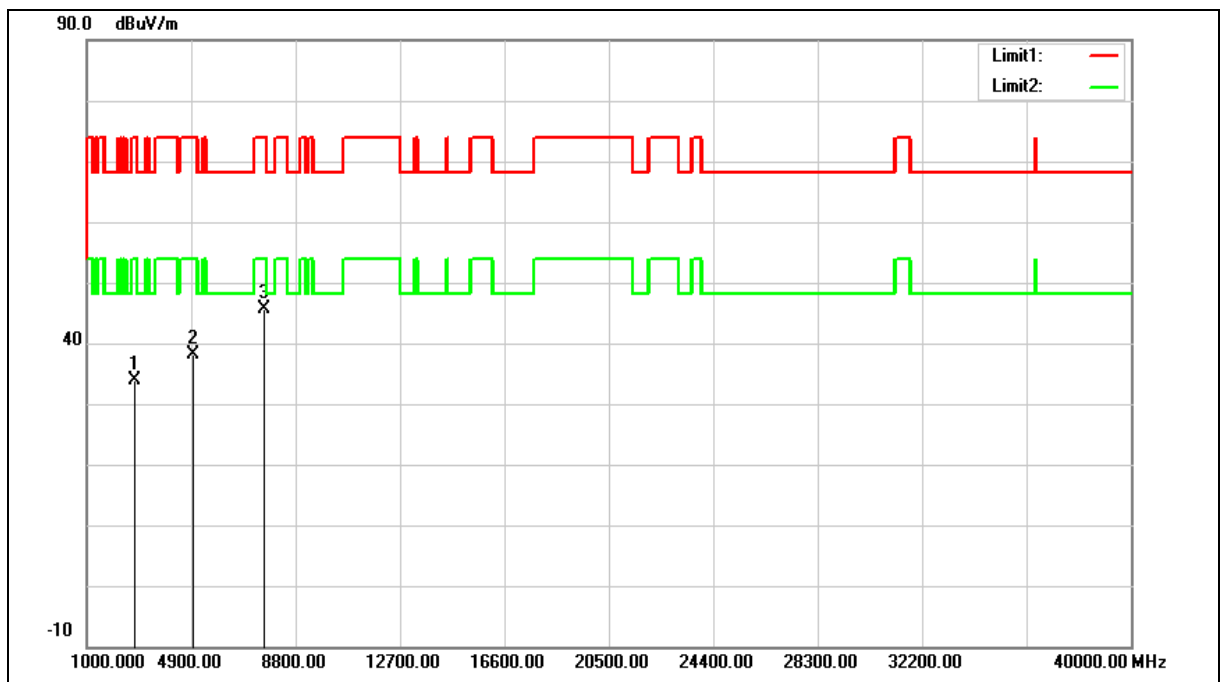


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2819.000	39.88	-5.98	33.90	74.00	-40.10	peak
2	4995.000	39.01	-0.78	38.23	74.00	-35.77	peak
3	7630.000	38.61	6.96	45.57	74.00	-28.43	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting		
	(WLAN 5 GHz + Bluetooth)		
Ant.Polar.:	Vertical		

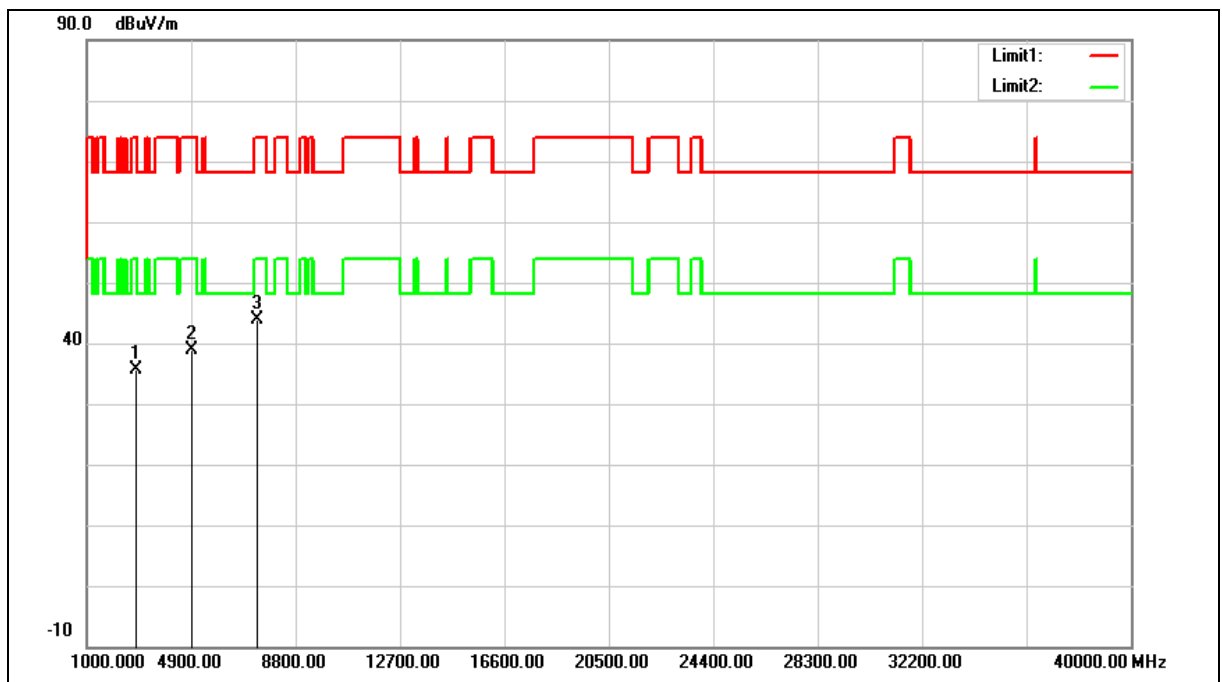


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2802.000	41.64	-6.04	35.60	74.00	-38.40	peak
2	4927.000	39.89	-0.97	38.92	74.00	-35.08	peak
3	7375.000	37.47	6.33	43.80	74.00	-30.20	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		
Description:			

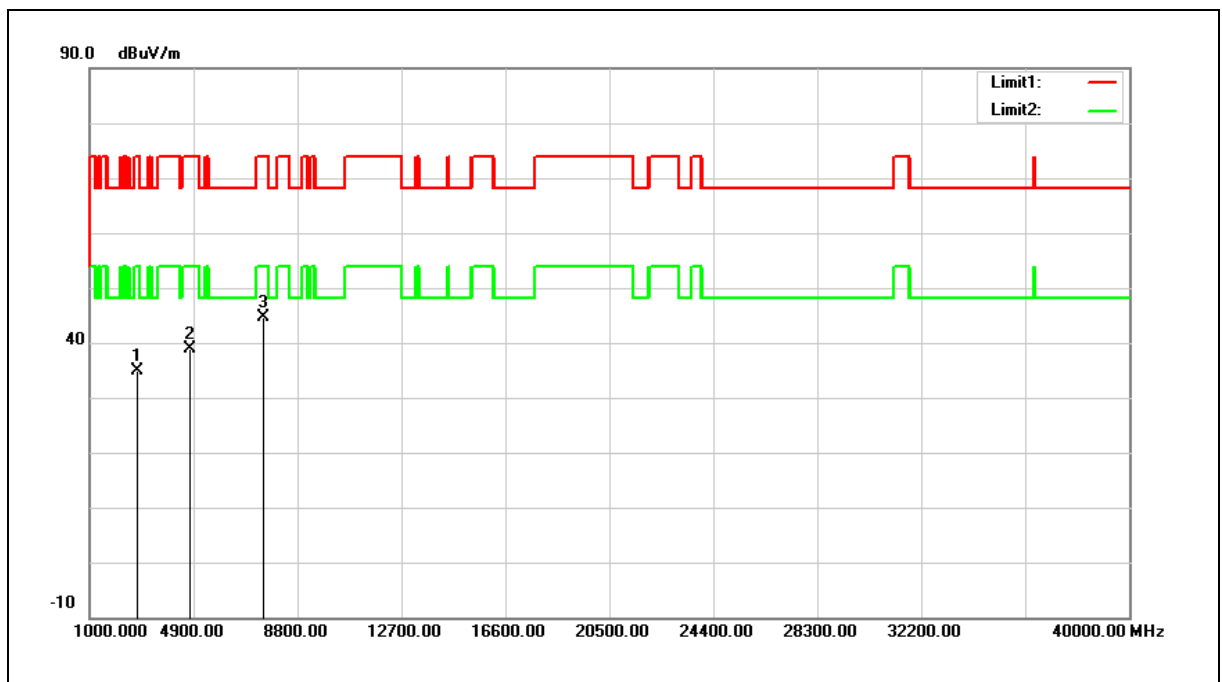


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2785.000	40.97	-6.11	34.86	74.00	-39.14	peak
2	4757.000	40.39	-1.44	38.95	74.00	-35.05	peak
3	7511.000	37.73	6.79	44.52	74.00	-29.48	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 12		
Ant.Polar.:	Vertical		
Description:			

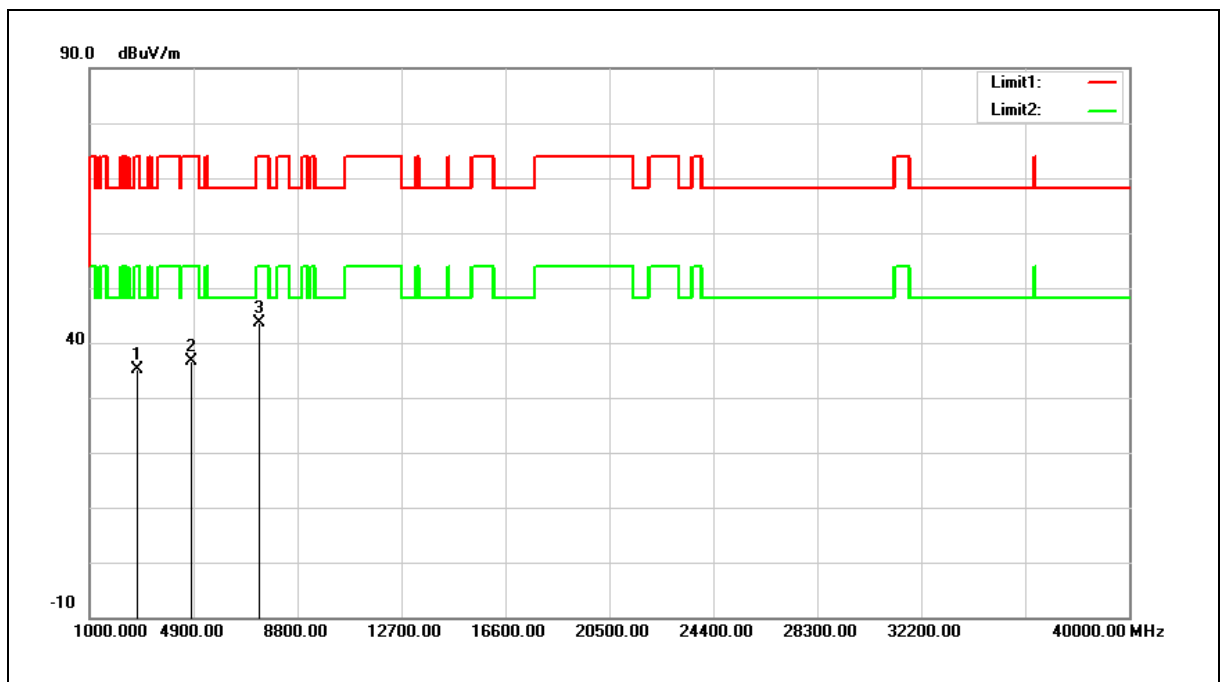

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2819.000	41.04	-5.98	35.06	74.00	-38.94	peak
2	4842.000	37.84	-1.20	36.64	74.00	-37.36	peak
3	7341.000	37.31	6.22	43.53	74.00	-30.47	peak


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

頻帶邊緣

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

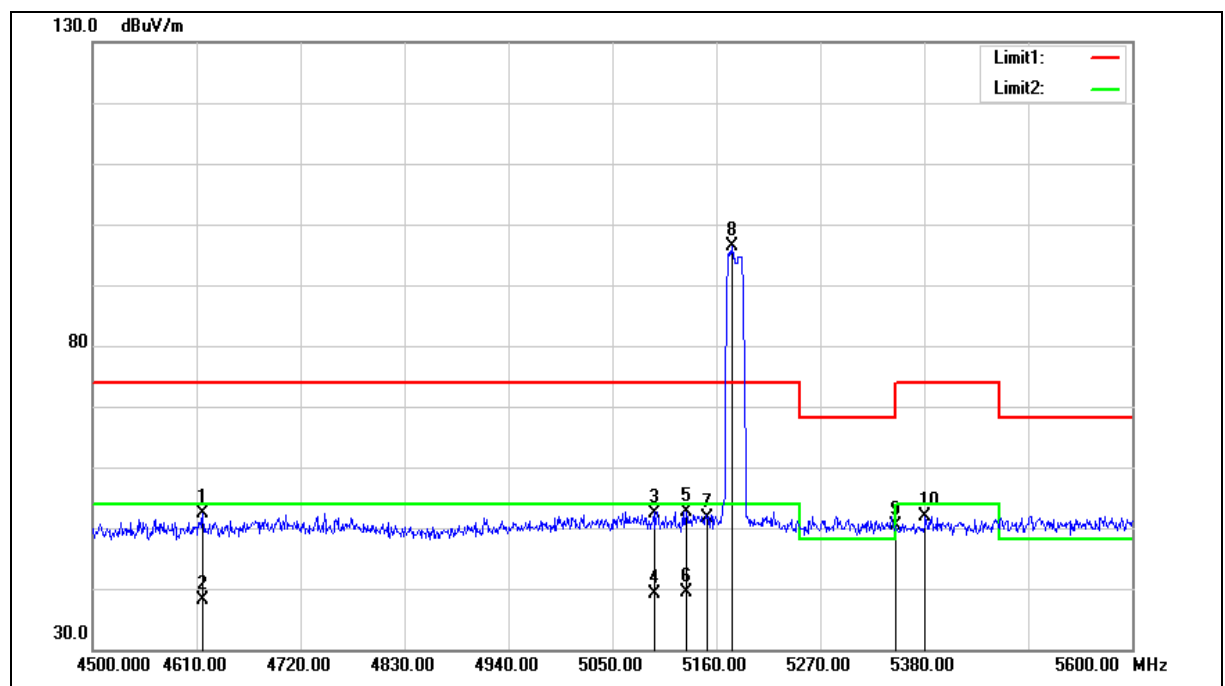

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4616.600	54.19	-1.82	52.37	74.00	-21.63	peak
2	4616.600	40.07	-1.82	38.25	54.00	-15.75	AVG
3	5094.000	53.08	-0.58	52.50	74.00	-21.50	peak
4	5094.000	39.59	-0.58	39.01	54.00	-14.99	AVG
5	5128.100	53.19	-0.52	52.67	74.00	-21.33	peak
6	5128.100	39.86	-0.52	39.34	54.00	-14.66	AVG
7	5150.000	52.09	-0.48	51.61	74.00	-22.39	peak
8	5176.500	96.71	-0.43	96.28	--	--	peak
9	5350.000	50.40	-0.08	50.32	74.00	-23.68	peak
10	5381.100	52.03	-0.03	52.00	74.00	-22.00	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

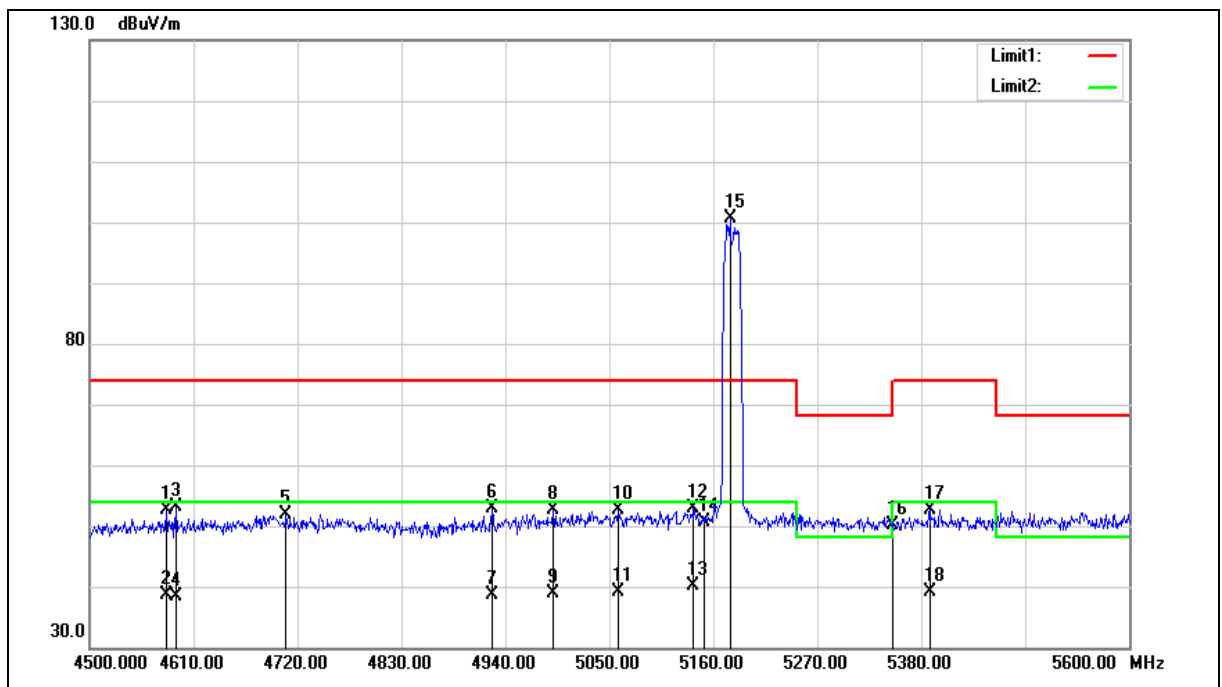

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4581.400	54.55	-1.92	52.63	74.00	-21.37	peak
2	4581.400	40.48	-1.92	38.56	54.00	-15.44	AVG
3	4591.300	55.11	-1.90	53.21	74.00	-20.79	peak
4	4591.300	40.18	-1.90	38.28	54.00	-15.72	AVG
5	4707.900	53.56	-1.58	51.98	74.00	-22.02	peak
6	4925.700	53.89	-0.97	52.92	74.00	-21.08	peak
7	4925.700	39.51	-0.97	38.54	54.00	-15.46	AVG
8	4990.600	53.36	-0.79	52.57	74.00	-21.43	peak
9	4990.600	39.66	-0.79	38.87	54.00	-15.13	AVG
10	5059.900	53.39	-0.65	52.74	74.00	-21.26	peak
11	5059.900	39.90	-0.65	39.25	54.00	-14.75	AVG
12	5139.100	53.33	-0.49	52.84	74.00	-21.16	peak
13	5139.100	40.58	-0.49	40.09	54.00	-13.91	AVG
14	5150.000	51.05	-0.48	50.57	74.00	-23.43	peak
15	5177.600	101.02	-0.42	100.60	--	--	peak
16	5350.000	50.16	-0.08	50.08	74.00	-23.92	peak
17	5388.800	52.70	0.00	52.70	74.00	-21.30	peak
18	5388.800	39.23	0.00	39.23	54.00	-14.77	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

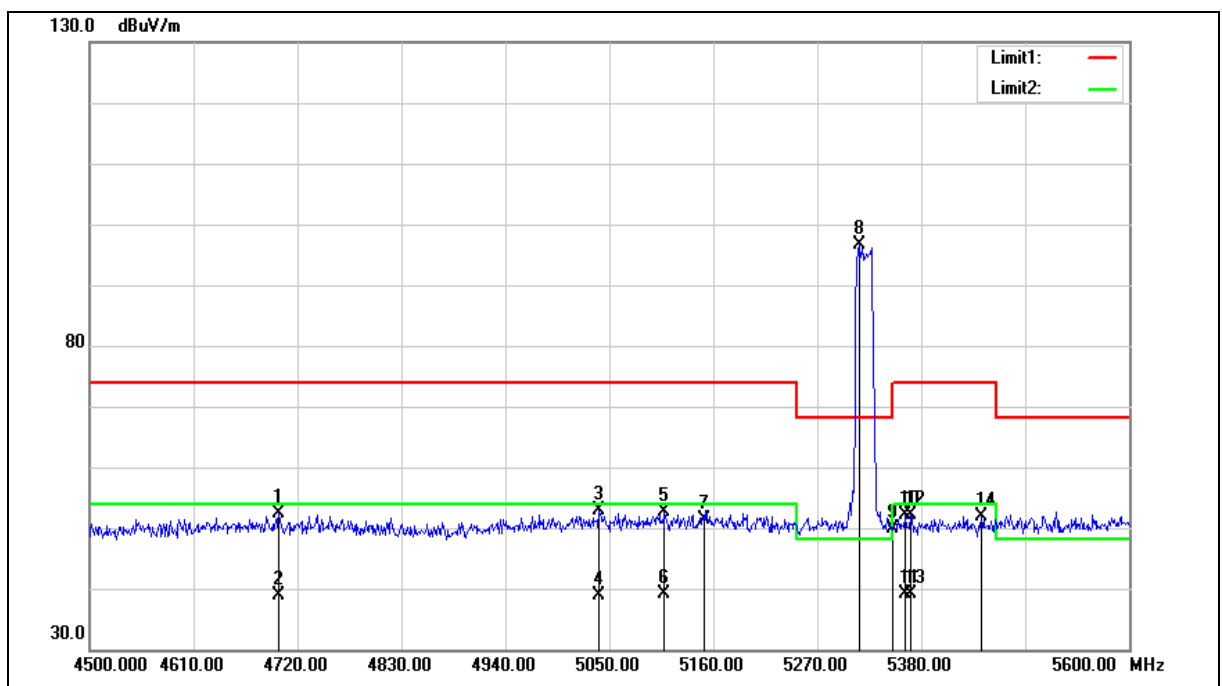

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4700.200	53.87	-1.59	52.28	74.00	-21.72	peak
2	4700.200	40.50	-1.59	38.91	54.00	-15.09	AVG
3	5039.000	53.60	-0.69	52.91	74.00	-21.09	peak
4	5039.000	39.61	-0.69	38.92	54.00	-15.08	AVG
5	5108.300	53.19	-0.56	52.63	74.00	-21.37	peak
6	5108.300	39.68	-0.56	39.12	54.00	-14.88	AVG
7	5150.000	51.81	-0.48	51.33	74.00	-22.67	peak
8	5314.000	96.86	-0.15	96.71	--	--	peak
9	5350.000	49.93	-0.08	49.85	74.00	-24.15	peak
10	5363.500	52.10	-0.06	52.04	74.00	-21.96	peak
11	5363.500	39.10	-0.06	39.04	54.00	-14.96	AVG
12	5369.000	52.05	-0.04	52.01	74.00	-21.99	peak
13	5369.000	39.09	-0.04	39.05	54.00	-14.95	AVG
14	5443.800	51.83	0.11	51.94	74.00	-22.06	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

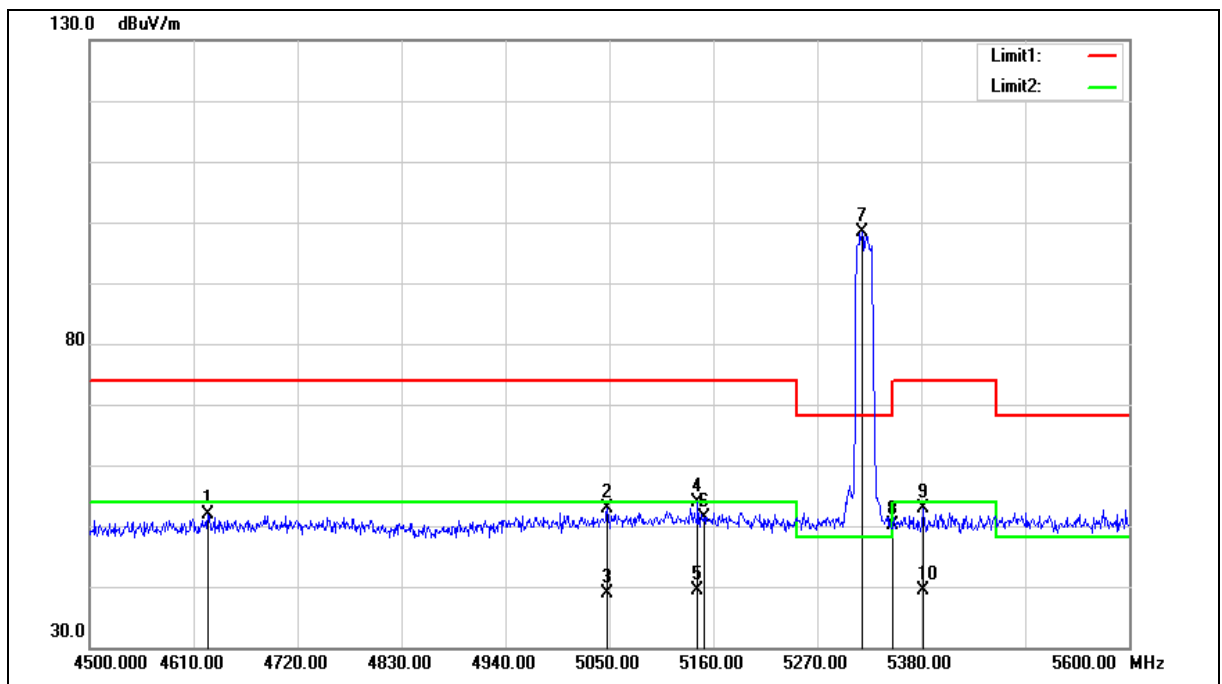

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4625.400	53.71	-1.80	51.91	74.00	-22.09	peak
2	5047.800	53.47	-0.68	52.79	74.00	-21.21	peak
3	5047.800	39.66	-0.68	38.98	54.00	-15.02	AVG
4	5143.500	54.28	-0.49	53.79	74.00	-20.21	peak
5	5143.500	39.90	-0.49	39.41	54.00	-14.59	AVG
6	5150.000	51.89	-0.48	51.41	74.00	-22.59	peak
7	5317.300	98.59	-0.15	98.44	--	--	peak
8	5350.000	50.18	-0.08	50.10	74.00	-23.90	peak
9	5382.200	52.84	-0.02	52.82	74.00	-21.18	peak
10	5382.200	39.32	-0.02	39.30	54.00	-14.70	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

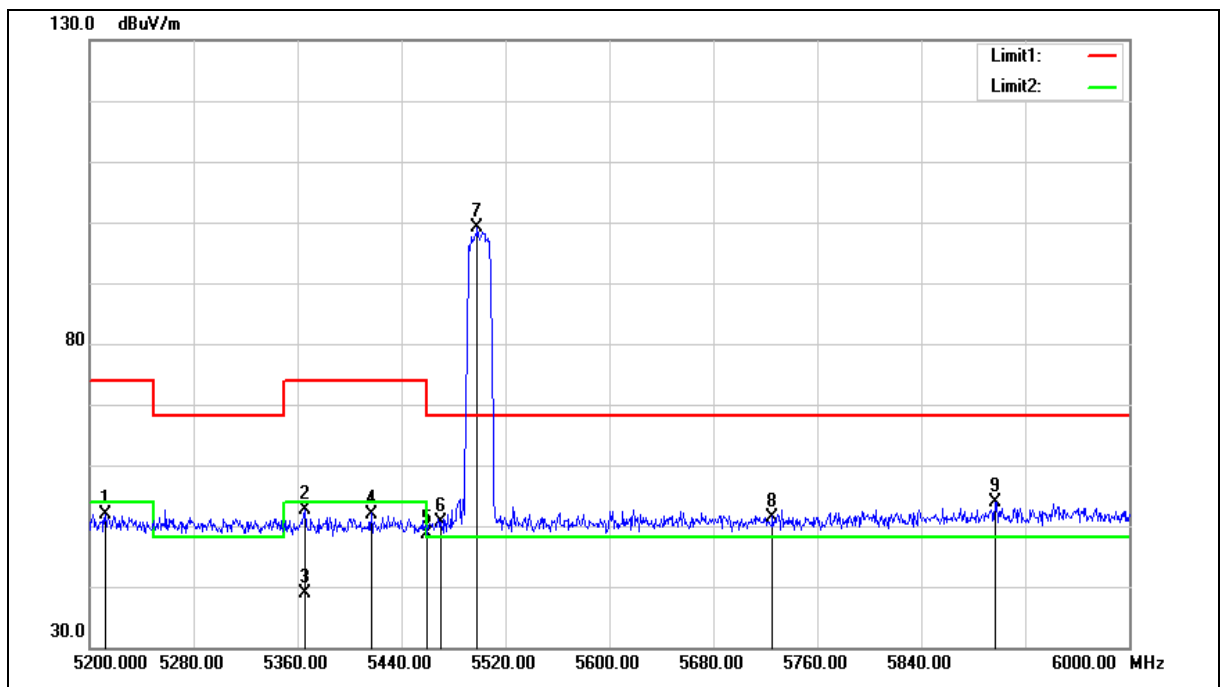

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5212.000	52.11	-0.35	51.76	74.00	-22.24	peak
2	5365.600	52.63	-0.05	52.58	74.00	-21.42	peak
3	5365.600	38.97	-0.05	38.92	54.00	-15.08	AVG
4	5416.800	51.95	0.05	52.00	74.00	-22.00	peak
5	5460.000	48.46	0.14	48.60	74.00	-25.40	peak
6	5470.000	50.43	0.16	50.59	68.20	-17.61	peak
7	5498.400	98.86	0.21	99.07	--	--	peak
8	5725.000	50.68	0.82	51.50	68.20	-16.70	peak
9	5896.800	52.51	1.29	53.80	68.20	-14.40	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

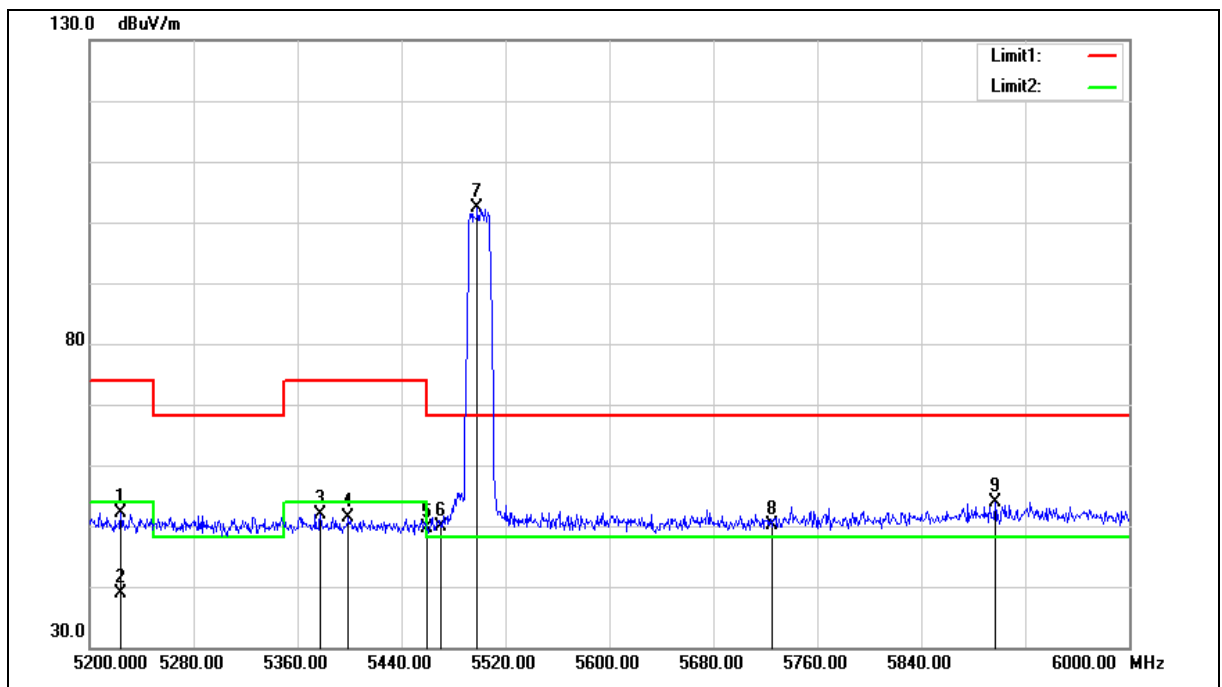

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5224.000	52.58	-0.33	52.25	74.00	-21.75	peak
2	5224.000	39.24	-0.33	38.91	54.00	-15.09	AVG
3	5377.600	51.96	-0.03	51.93	74.00	-22.07	peak
4	5399.200	51.25	0.02	51.27	74.00	-22.73	peak
5	5460.000	49.50	0.14	49.64	74.00	-24.36	peak
6	5470.000	49.68	0.16	49.84	68.20	-18.36	peak
7	5498.400	102.16	0.21	102.37	--	--	peak
8	5725.000	49.33	0.82	50.15	68.20	-18.05	peak
9	5896.800	52.55	1.29	53.84	68.20	-14.36	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

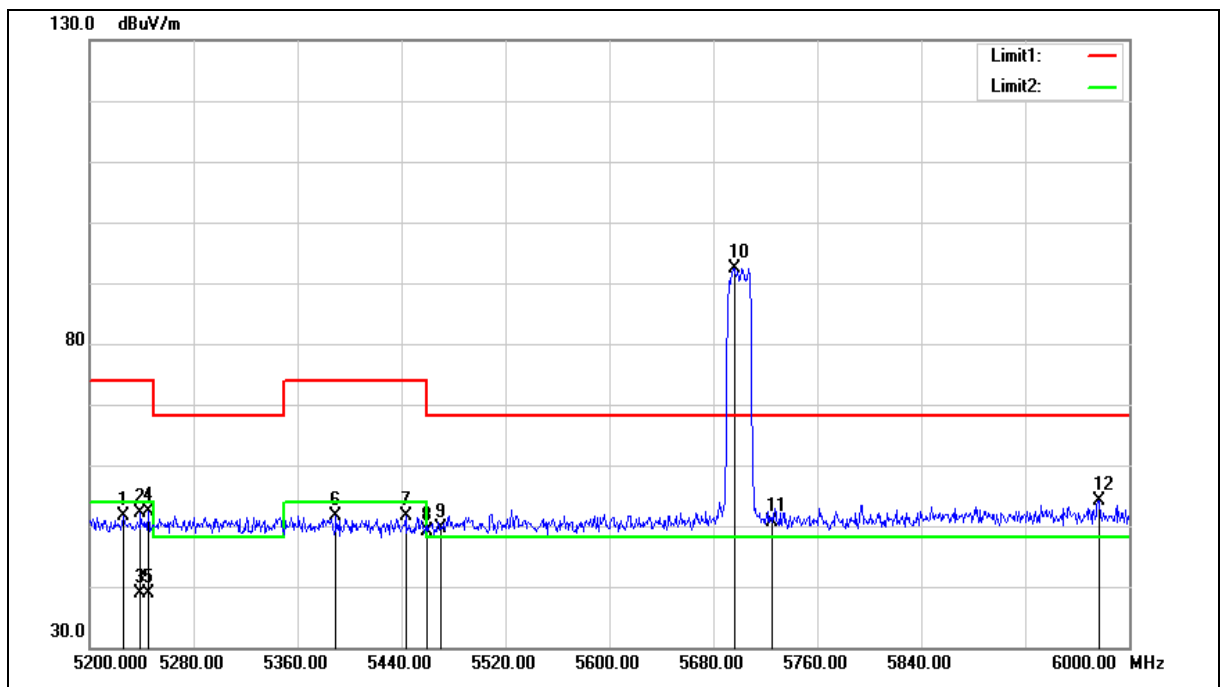

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5226.400	51.92	-0.32	51.60	74.00	-22.40	peak
2	5239.200	52.43	-0.30	52.13	74.00	-21.87	peak
3	5239.200	39.14	-0.30	38.84	54.00	-15.16	AVG
4	5245.600	52.58	-0.28	52.30	74.00	-21.70	peak
5	5245.600	39.10	-0.28	38.82	54.00	-15.18	AVG
6	5389.600	51.70	0.00	51.70	74.00	-22.30	peak
7	5443.200	51.57	0.10	51.67	74.00	-22.33	peak
8	5460.000	48.87	0.14	49.01	74.00	-24.99	peak
9	5470.000	49.51	0.16	49.67	68.20	-18.53	peak
10	5696.000	91.70	0.74	92.44	--	--	peak
11	5725.000	49.73	0.82	50.55	68.20	-17.65	peak
12	5976.800	52.65	1.50	54.15	68.20	-14.05	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

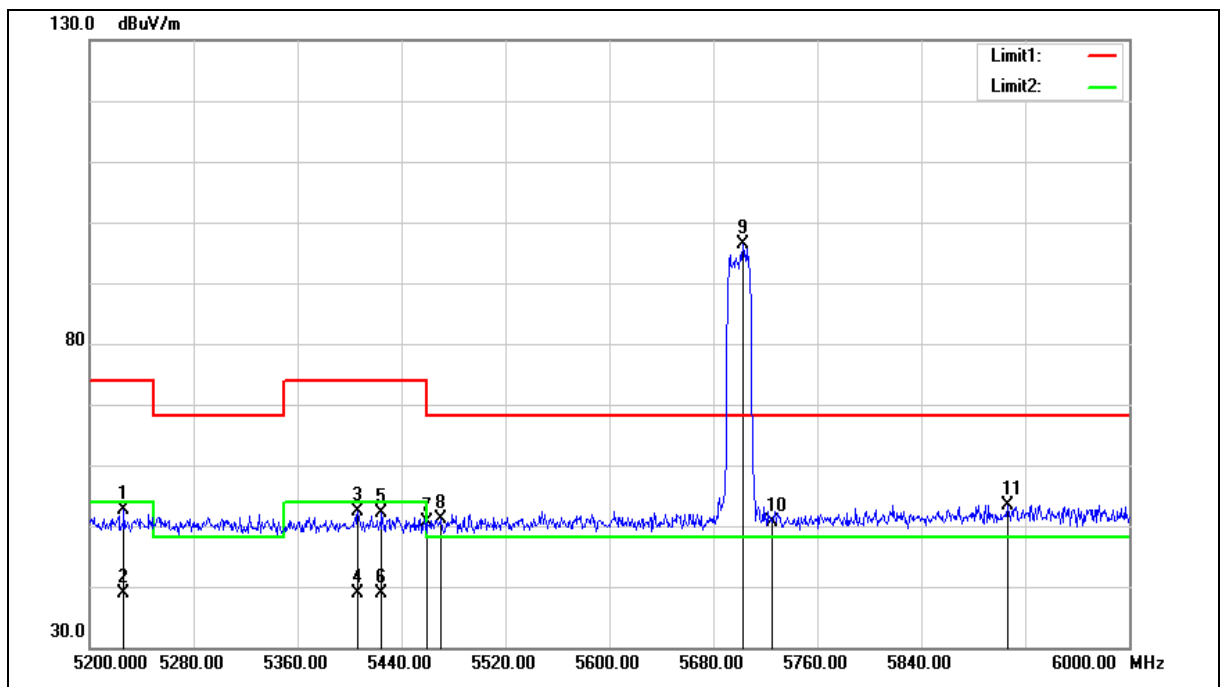

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5226.400	52.95	-0.32	52.63	74.00	-21.37	peak
2	5226.400	39.19	-0.32	38.87	54.00	-15.13	AVG
3	5406.400	52.39	0.04	52.43	74.00	-21.57	peak
4	5406.400	38.77	0.04	38.81	54.00	-15.19	AVG
5	5424.800	52.00	0.06	52.06	74.00	-21.94	peak
6	5424.800	38.85	0.06	38.91	54.00	-15.09	AVG
7	5460.000	50.54	0.14	50.68	74.00	-23.32	peak
8	5470.000	50.92	0.16	51.08	68.20	-17.12	peak
9	5702.400	95.70	0.76	96.46	--	--	peak
10	5725.000	49.84	0.82	50.66	68.20	-17.54	peak
11	5906.400	52.13	1.32	53.45	68.20	-14.75	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

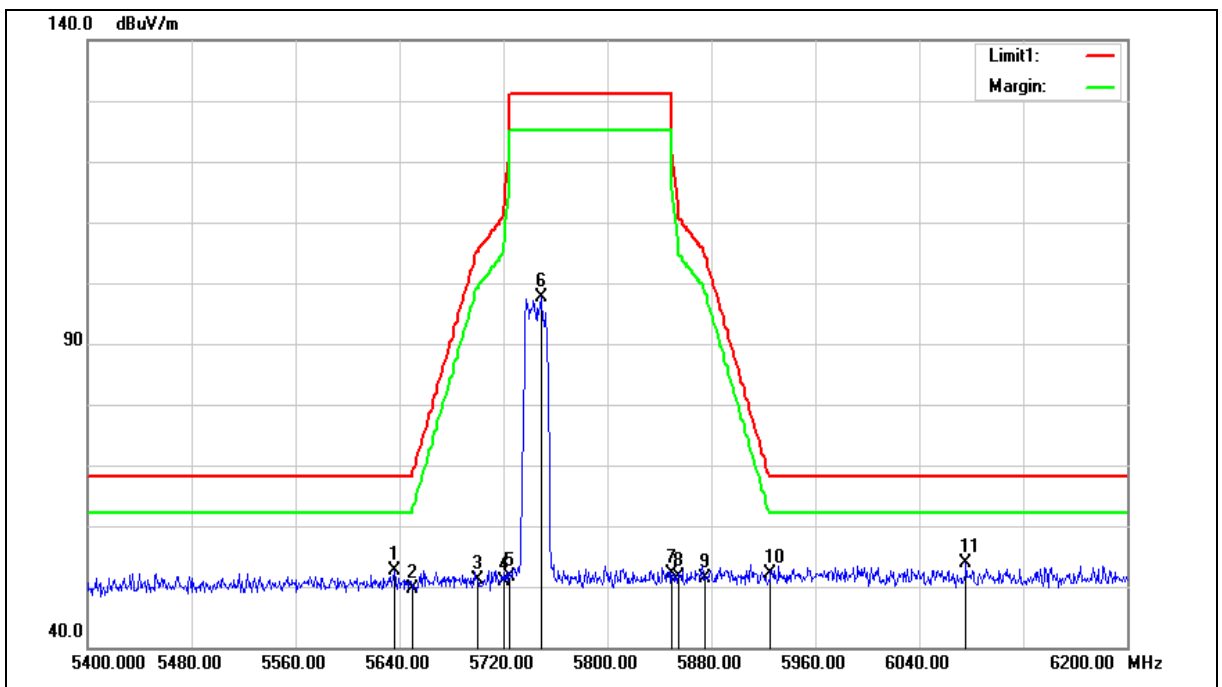

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5636.000	52.13	0.59	52.72	68.20	-15.48	peak
2	5650.000	49.06	0.62	49.68	68.20	-18.52	peak
3	5700.000	50.27	0.75	51.02	105.20	-54.18	peak
4	5720.000	49.97	0.81	50.78	110.80	-60.02	peak
5	5725.000	50.92	0.82	51.74	122.20	-70.46	peak
6	5748.800	96.82	0.89	97.71	--	--	peak
7	5850.000	50.93	1.17	52.10	122.20	-70.10	peak
8	5855.000	50.41	1.18	51.59	110.80	-59.21	peak
9	5875.000	50.15	1.23	51.38	105.20	-53.82	peak
10	5925.000	50.74	1.37	52.11	68.20	-16.09	peak
11	6076.000	51.99	1.84	53.83	68.20	-14.37	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

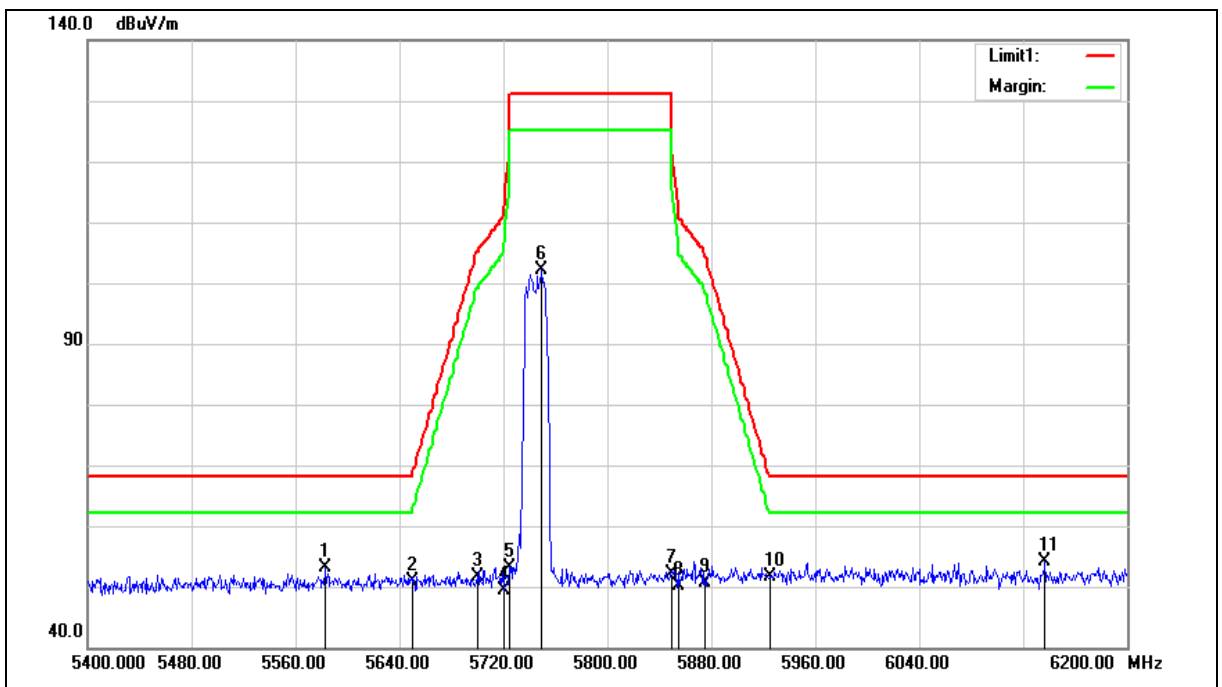

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5583.200	52.65	0.43	53.08	68.20	-15.12	peak
2	5650.000	50.15	0.62	50.77	68.20	-17.43	peak
3	5700.000	50.78	0.75	51.53	105.20	-53.67	peak
4	5720.000	48.50	0.81	49.31	110.80	-61.49	peak
5	5725.000	52.29	0.82	53.11	122.20	-69.09	peak
6	5749.600	101.16	0.89	102.05	--	--	peak
7	5850.000	51.03	1.17	52.20	122.20	-70.00	peak
8	5855.000	49.02	1.18	50.20	110.80	-60.60	peak
9	5875.000	49.49	1.23	50.72	105.20	-54.48	peak
10	5925.000	50.30	1.37	51.67	68.20	-16.53	peak
11	6136.800	52.06	2.06	54.12	68.20	-14.08	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

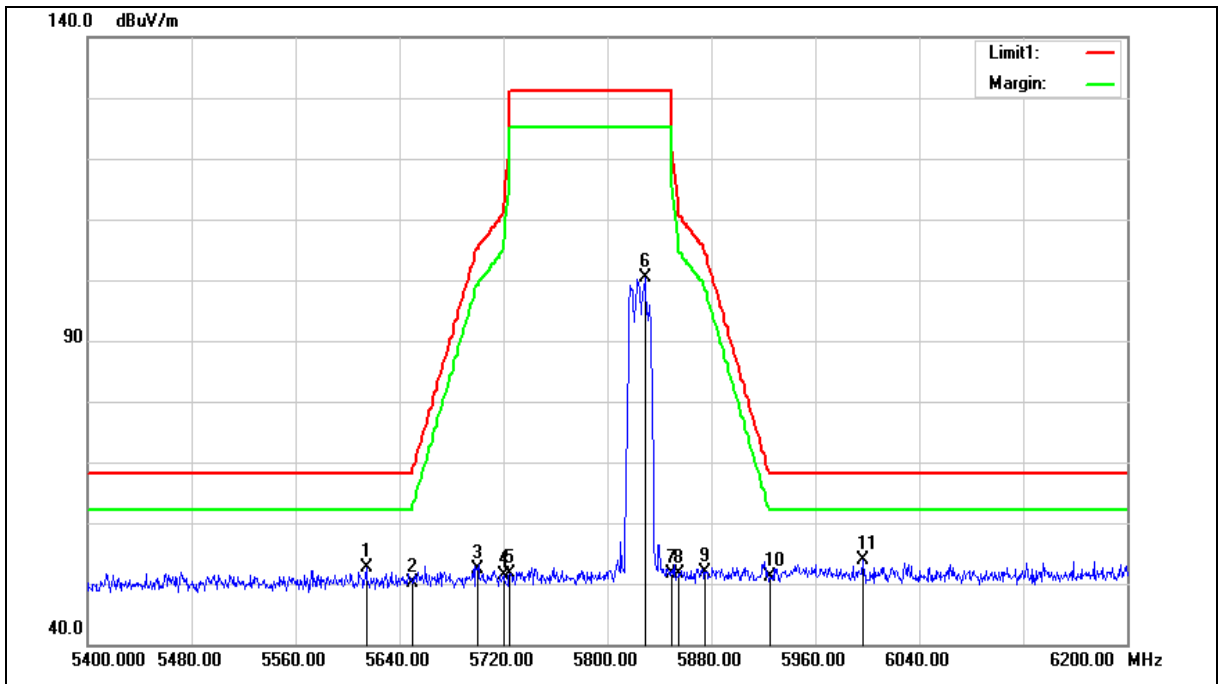

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5614.400	52.05	0.52	52.57	68.20	-15.63	peak
2	5650.000	49.60	0.62	50.22	68.20	-17.98	peak
3	5700.000	51.58	0.75	52.33	105.20	-52.87	peak
4	5720.000	50.50	0.81	51.31	110.80	-59.49	peak
5	5725.000	50.74	0.82	51.56	122.20	-70.64	peak
6	5828.800	99.38	1.11	100.49	--	--	peak
7	5850.000	50.49	1.17	51.66	122.20	-70.54	peak
8	5855.000	50.47	1.18	51.65	110.80	-59.15	peak
9	5875.000	50.59	1.23	51.82	105.20	-53.38	peak
10	5925.000	49.67	1.37	51.04	68.20	-17.16	peak
11	5996.800	52.29	1.56	53.85	68.20	-14.35	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

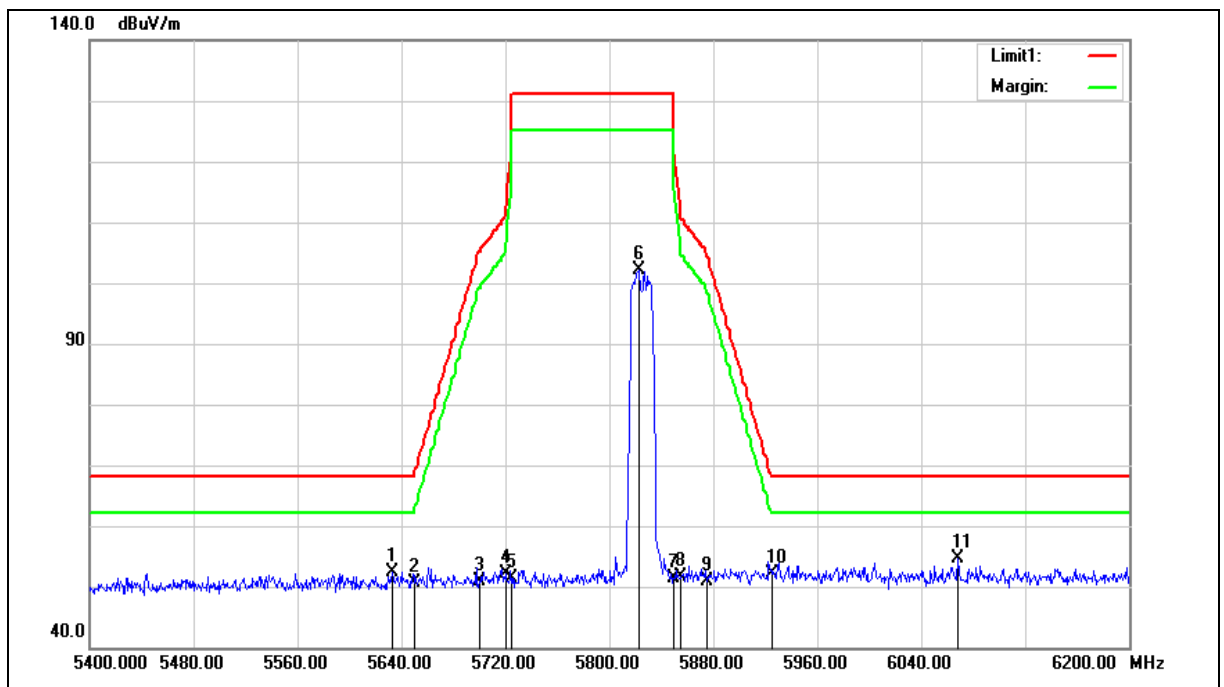

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5632.800	51.90	0.58	52.48	68.20	-15.72	peak
2	5650.000	50.05	0.62	50.67	68.20	-17.53	peak
3	5700.000	50.16	0.75	50.91	105.20	-54.29	peak
4	5720.000	51.22	0.81	52.03	110.80	-58.77	peak
5	5725.000	50.45	0.82	51.27	122.20	-70.93	peak
6	5822.400	101.07	1.10	102.17	--	--	peak
7	5850.000	50.19	1.17	51.36	122.20	-70.84	peak
8	5855.000	50.36	1.18	51.54	110.80	-59.26	peak
9	5875.000	49.60	1.23	50.83	105.20	-54.37	peak
10	5925.000	50.65	1.37	52.02	68.20	-16.18	peak
11	6068.000	52.78	1.80	54.58	68.20	-13.62	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

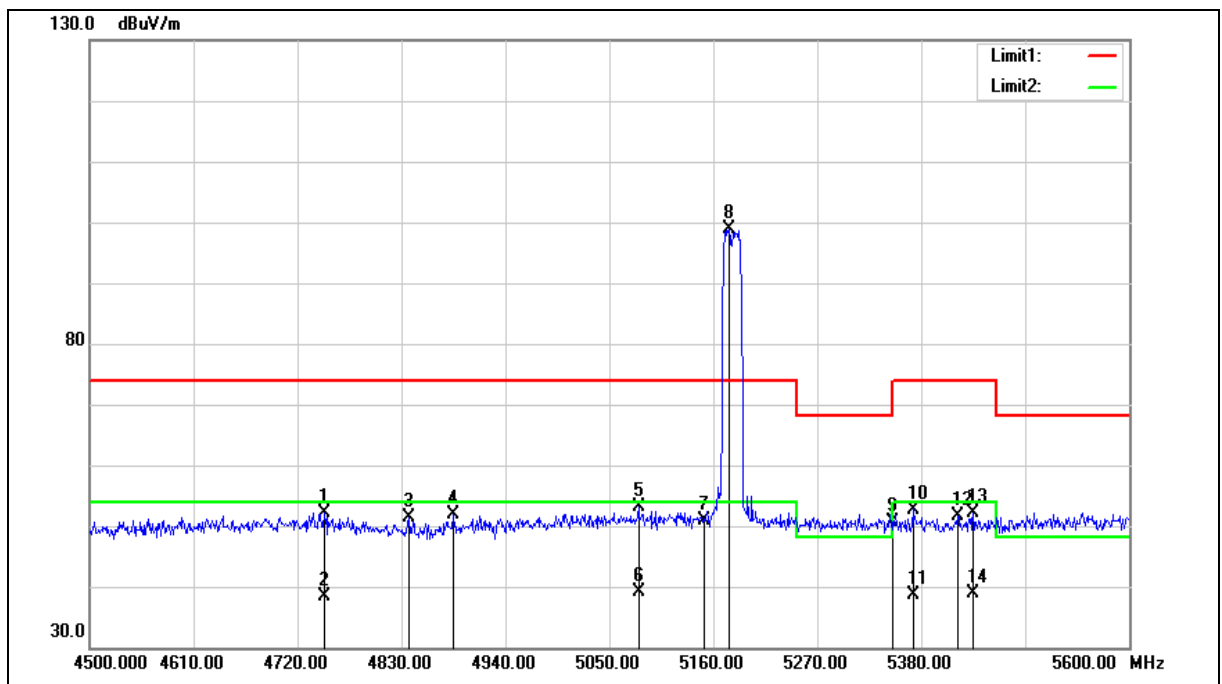

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4748.600	53.63	-1.46	52.17	74.00	-21.83	peak
2	4748.600	39.76	-1.46	38.30	54.00	-15.70	AVG
3	4837.700	52.55	-1.22	51.33	74.00	-22.67	peak
4	4885.000	53.07	-1.09	51.98	74.00	-22.02	peak
5	5080.800	53.62	-0.61	53.01	74.00	-20.99	peak
6	5080.800	39.78	-0.61	39.17	54.00	-14.83	AVG
7	5150.000	51.25	-0.48	50.77	74.00	-23.23	peak
8	5176.500	99.32	-0.43	98.89	--	--	peak
9	5350.000	50.69	-0.08	50.61	74.00	-23.39	peak
10	5371.200	52.78	-0.03	52.75	74.00	-21.25	peak
11	5371.200	38.78	-0.03	38.75	54.00	-15.25	AVG
12	5418.500	51.70	0.05	51.75	74.00	-22.25	peak
13	5435.000	51.93	0.09	52.02	74.00	-21.98	peak
14	5435.000	38.78	0.09	38.87	54.00	-15.13	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

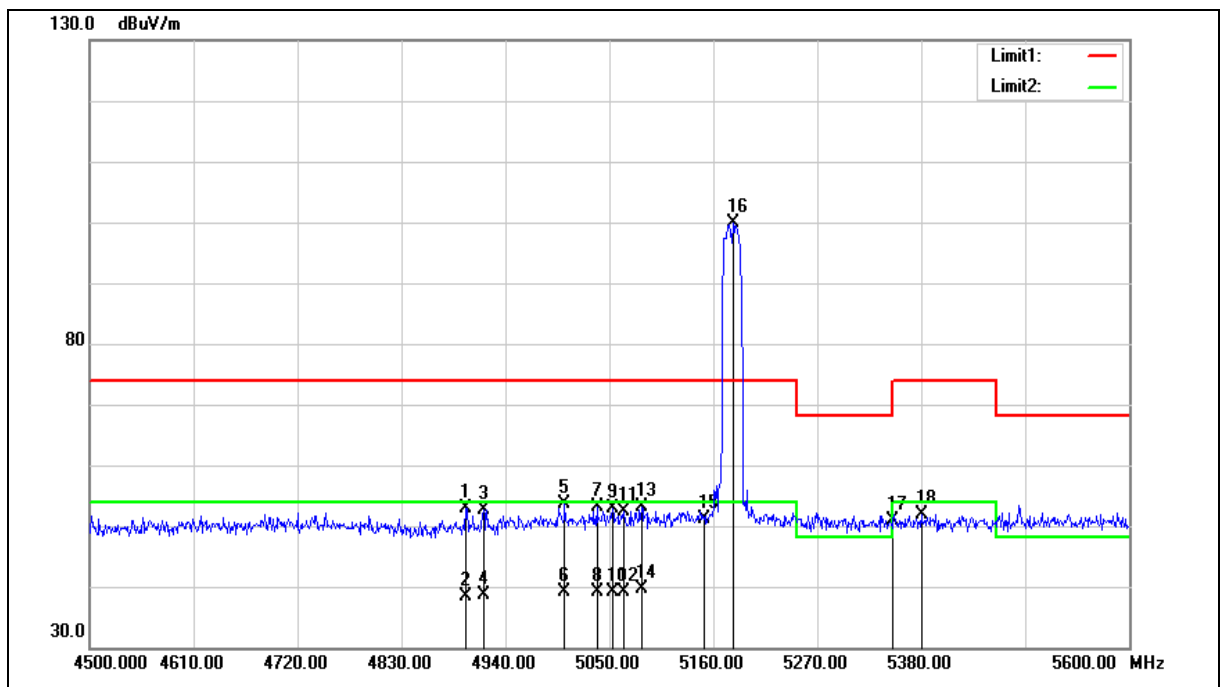

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4898.200	53.91	-1.05	52.86	74.00	-21.14	peak
2	4898.200	39.45	-1.05	38.40	54.00	-15.60	AVG
3	4916.900	53.59	-1.00	52.59	74.00	-21.41	peak
4	4916.900	39.60	-1.00	38.60	54.00	-15.40	AVG
5	5002.700	54.32	-0.77	53.55	74.00	-20.45	peak
6	5002.700	39.88	-0.77	39.11	54.00	-14.89	AVG
7	5036.800	53.71	-0.69	53.02	74.00	-20.98	peak
8	5036.800	39.78	-0.69	39.09	54.00	-14.91	AVG
9	5053.300	53.50	-0.66	52.84	74.00	-21.16	peak
10	5053.300	39.79	-0.66	39.13	54.00	-14.87	AVG
11	5065.400	52.95	-0.64	52.31	74.00	-21.69	peak
12	5065.400	39.75	-0.64	39.11	54.00	-14.89	AVG
13	5084.100	53.84	-0.60	53.24	74.00	-20.76	peak
14	5084.100	40.11	-0.60	39.51	54.00	-14.49	AVG
15	5150.000	51.68	-0.48	51.20	74.00	-22.80	peak
16	5180.900	100.39	-0.42	99.97	--	--	peak
17	5350.000	50.96	-0.08	50.88	74.00	-23.12	peak
18	5380.000	51.82	-0.03	51.79	74.00	-22.21	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

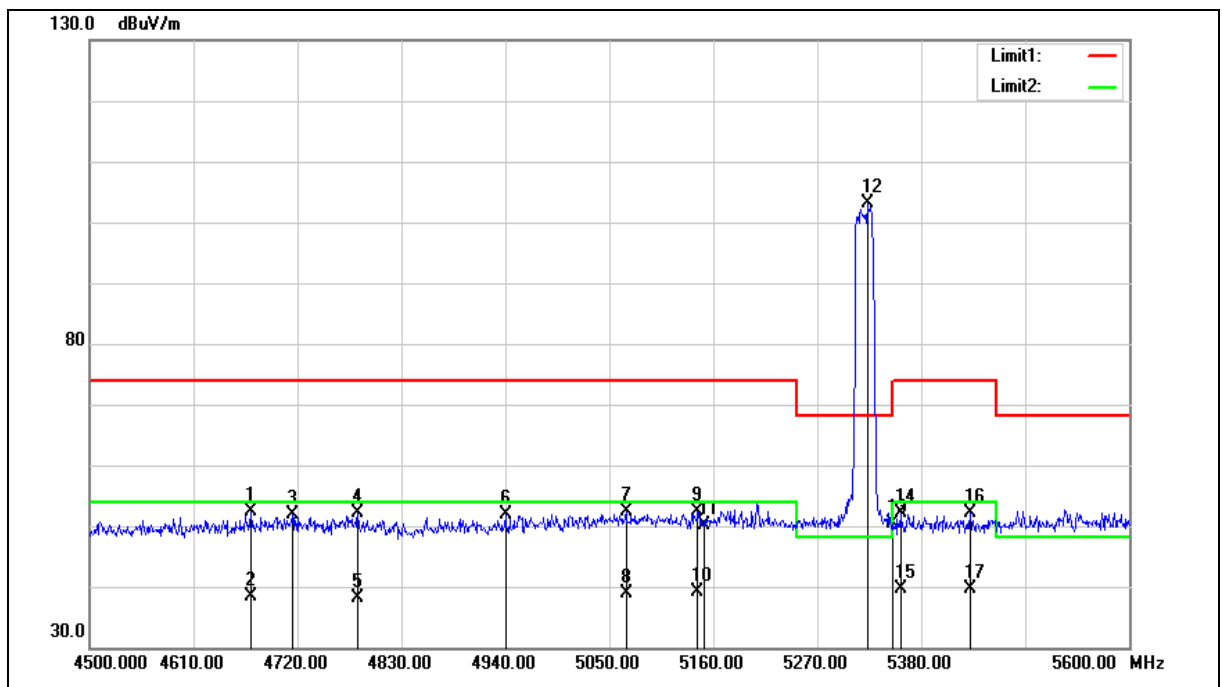

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4670.500	53.97	-1.67	52.30	74.00	-21.70	peak
2	4670.500	39.93	-1.67	38.26	54.00	-15.74	AVG
3	4714.500	53.33	-1.55	51.78	74.00	-22.22	peak
4	4783.800	53.39	-1.36	52.03	74.00	-21.97	peak
5	4783.800	39.61	-1.36	38.25	54.00	-15.75	AVG
6	4940.000	52.77	-0.94	51.83	74.00	-22.17	peak
7	5067.600	53.02	-0.64	52.38	74.00	-21.62	peak
8	5067.600	39.55	-0.64	38.91	54.00	-15.09	AVG
9	5143.500	52.83	-0.49	52.34	74.00	-21.66	peak
10	5143.500	39.54	-0.49	39.05	54.00	-14.95	AVG
11	5150.000	50.53	-0.48	50.05	74.00	-23.95	peak
12	5322.800	103.35	-0.14	103.21	--	--	peak
13	5350.000	50.38	-0.08	50.30	74.00	-23.70	peak
14	5358.000	52.13	-0.06	52.07	74.00	-21.93	peak
15	5358.000	39.70	-0.06	39.64	54.00	-14.36	AVG
16	5431.700	52.06	0.09	52.15	74.00	-21.85	peak
17	5431.700	39.49	0.09	39.58	54.00	-14.42	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

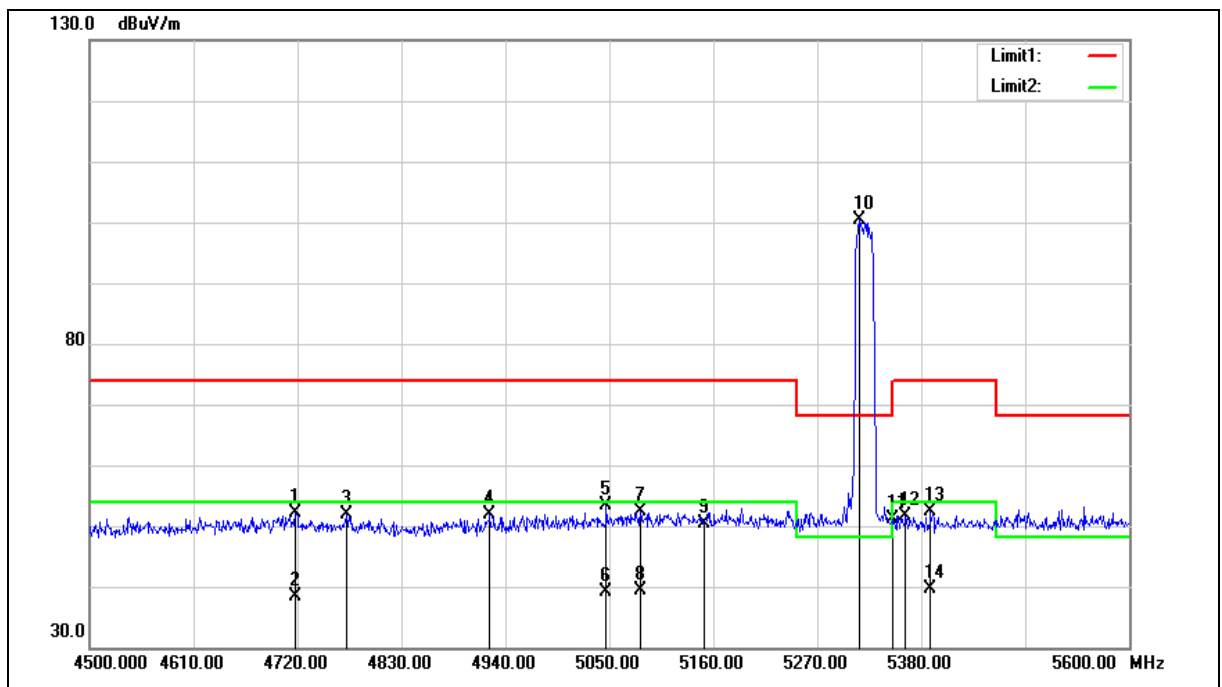

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4717.800	53.65	-1.55	52.10	74.00	-21.90	peak
2	4717.800	39.93	-1.55	38.38	54.00	-15.62	AVG
3	4771.700	53.37	-1.40	51.97	74.00	-22.03	peak
4	4923.500	52.83	-0.99	51.84	74.00	-22.16	peak
5	5046.700	53.98	-0.68	53.30	74.00	-20.70	peak
6	5046.700	39.69	-0.68	39.01	54.00	-14.99	AVG
7	5083.000	53.06	-0.60	52.46	74.00	-21.54	peak
8	5083.000	40.05	-0.60	39.45	54.00	-14.55	AVG
9	5150.000	50.74	-0.48	50.26	74.00	-23.74	peak
10	5314.000	100.41	-0.15	100.26	--	--	peak
11	5350.000	51.09	-0.08	51.01	74.00	-22.99	peak
12	5363.500	51.63	-0.06	51.57	74.00	-22.43	peak
13	5389.900	52.37	0.00	52.37	74.00	-21.63	peak
14	5389.900	39.75	0.00	39.75	54.00	-14.25	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

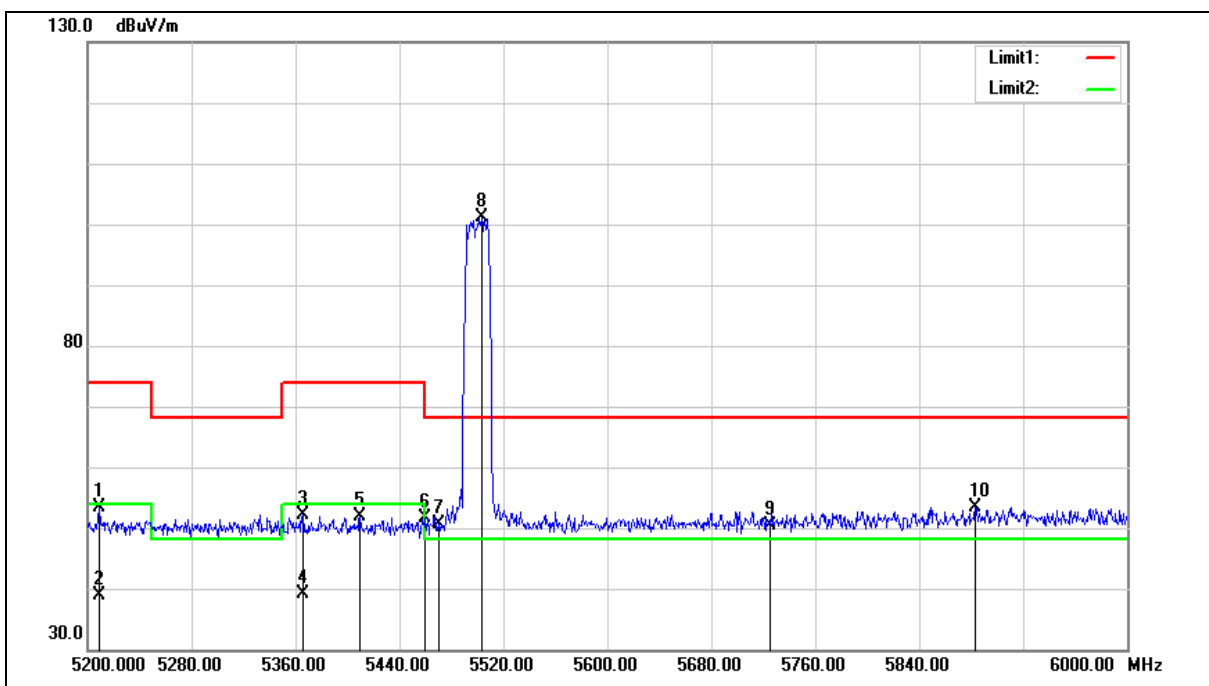

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5208.800	53.81	-0.36	53.45	74.00	-20.55	peak
2	5208.800	39.27	-0.36	38.91	54.00	-15.09	AVG
3	5365.600	52.28	-0.05	52.23	74.00	-21.77	peak
4	5365.600	39.06	-0.05	39.01	54.00	-14.99	AVG
5	5409.600	51.91	0.04	51.95	74.00	-22.05	peak
6	5460.000	51.42	0.14	51.56	74.00	-22.44	peak
7	5470.000	50.38	0.16	50.54	68.20	-17.66	peak
8	5503.200	100.96	0.23	101.19	--	--	peak
9	5725.000	49.63	0.82	50.45	68.20	-17.75	peak
10	5883.200	52.10	1.25	53.35	68.20	-14.85	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

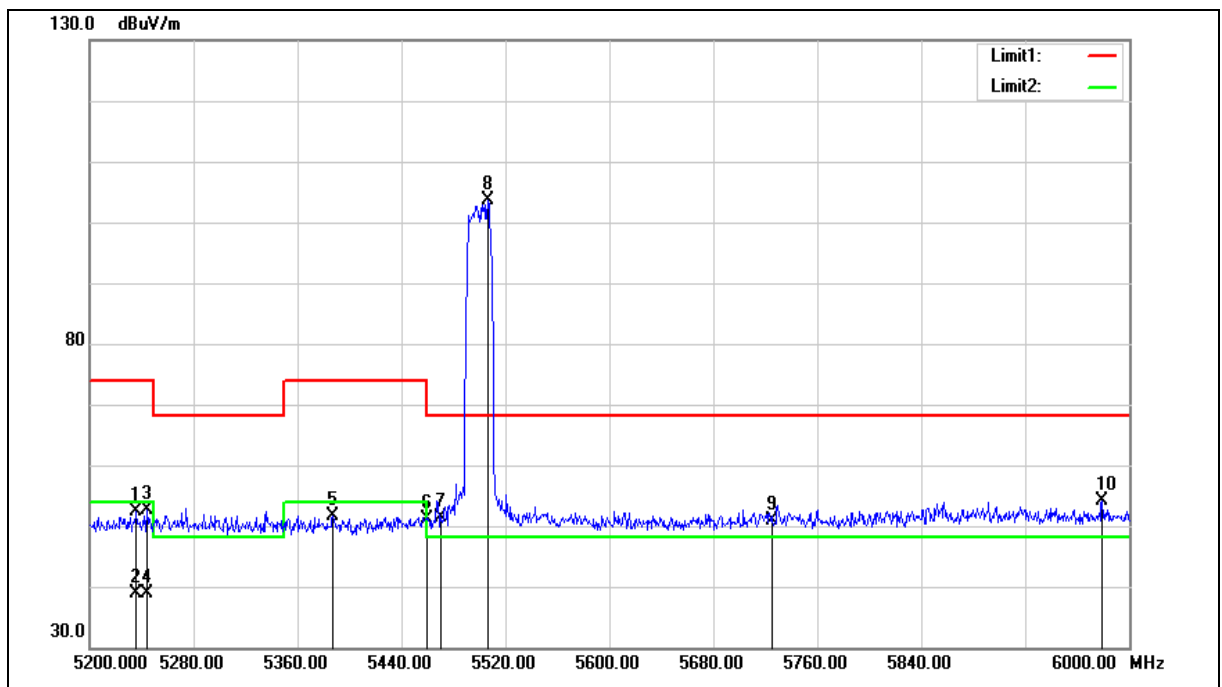

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5236.000	52.61	-0.31	52.30	74.00	-21.70	peak
2	5236.000	39.22	-0.31	38.91	54.00	-15.09	AVG
3	5244.000	52.79	-0.28	52.51	74.00	-21.49	peak
4	5244.000	39.22	-0.28	38.94	54.00	-15.06	AVG
5	5387.200	51.65	0.00	51.65	74.00	-22.35	peak
6	5460.000	50.91	0.14	51.05	74.00	-22.95	peak
7	5470.000	51.17	0.16	51.33	68.20	-16.87	peak
8	5506.400	103.42	0.23	103.65	--	--	peak
9	5725.000	50.02	0.82	50.84	68.20	-17.36	peak
10	5979.200	52.50	1.52	54.02	68.20	-14.18	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

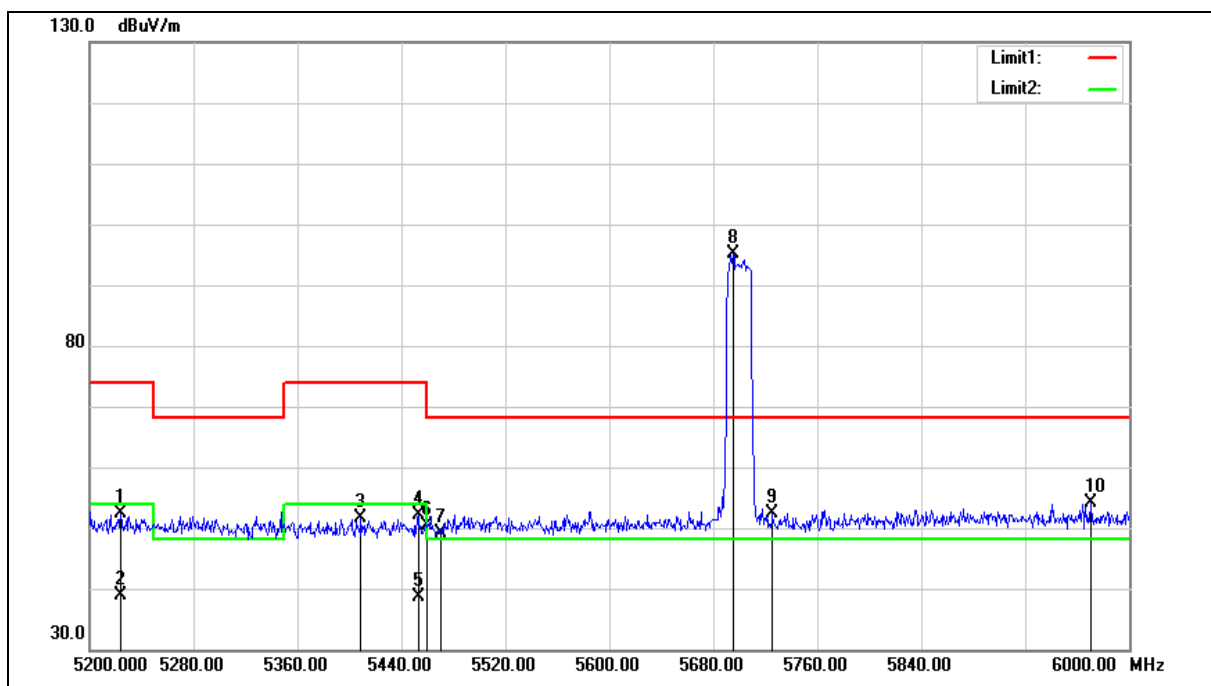

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5224.000	52.59	-0.33	52.26	74.00	-21.74	peak
2	5224.000	39.19	-0.33	38.86	54.00	-15.14	AVG
3	5408.800	51.48	0.04	51.52	74.00	-22.48	peak
4	5452.800	52.12	0.12	52.24	74.00	-21.76	peak
5	5452.800	38.62	0.12	38.74	54.00	-15.26	AVG
6	5460.000	50.27	0.14	50.41	74.00	-23.59	peak
7	5470.000	49.01	0.16	49.17	68.20	-19.03	peak
8	5695.200	94.51	0.74	95.25	--	--	peak
9	5725.000	51.51	0.82	52.33	68.20	-15.87	peak
10	5970.400	52.74	1.49	54.23	68.20	-13.97	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

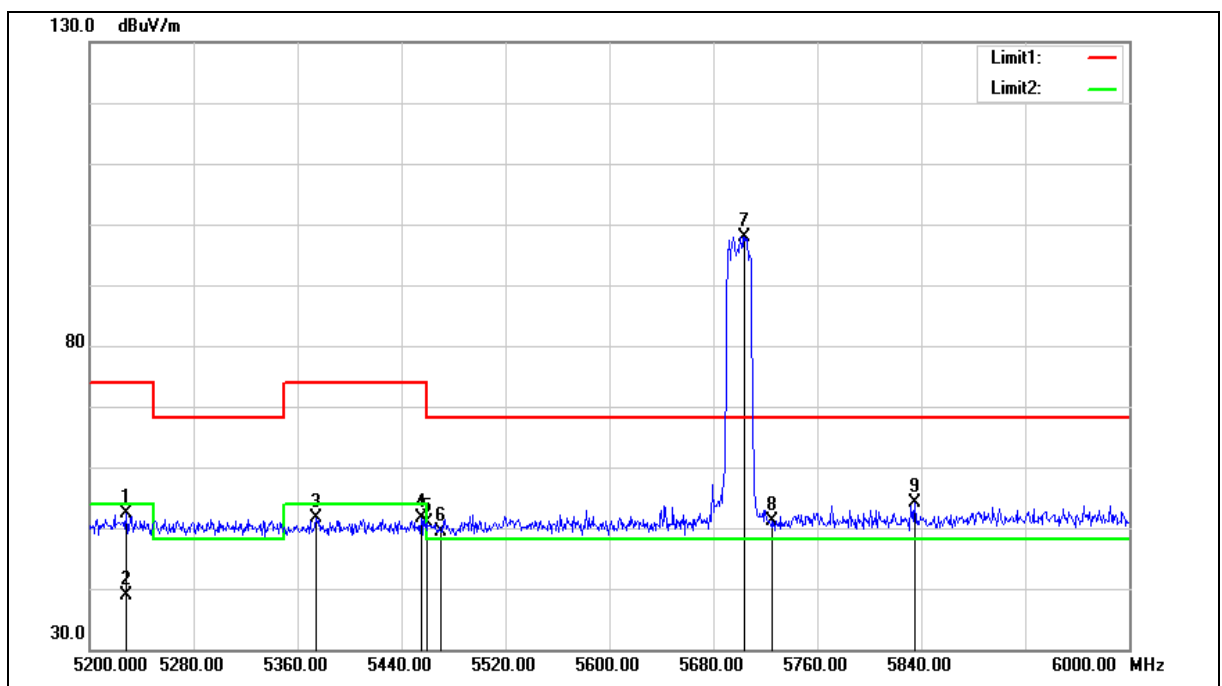

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5228.000	52.73	-0.32	52.41	74.00	-21.59	peak
2	5228.000	39.19	-0.32	38.87	54.00	-15.13	AVG
3	5374.400	51.65	-0.03	51.62	74.00	-22.38	peak
4	5455.200	51.49	0.12	51.61	74.00	-22.39	peak
5	5460.000	50.70	0.14	50.84	74.00	-23.16	peak
6	5470.000	49.21	0.16	49.37	68.20	-18.83	peak
7	5704.000	97.19	0.78	97.97	--	--	peak
8	5725.000	50.29	0.82	51.11	68.20	-17.09	peak
9	5835.200	53.04	1.13	54.17	68.20	-14.03	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

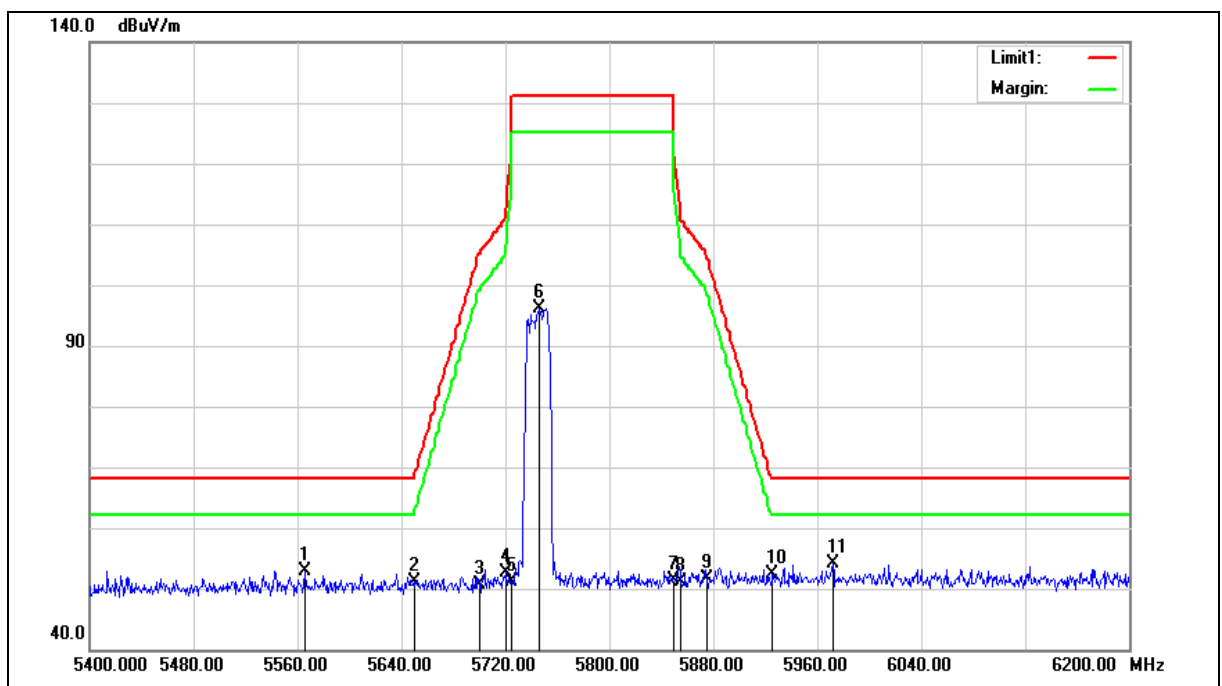

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5565.600	52.47	0.39	52.86	68.20	-15.34	peak
2	5650.000	50.51	0.62	51.13	68.20	-17.07	peak
3	5700.000	49.77	0.75	50.52	105.20	-54.68	peak
4	5720.000	51.79	0.81	52.60	110.80	-58.20	peak
5	5725.000	50.24	0.82	51.06	122.20	-71.14	peak
6	5746.400	95.27	0.88	96.15	--	--	peak
7	5850.000	50.17	1.17	51.34	122.20	-70.86	peak
8	5855.000	50.01	1.18	51.19	110.80	-59.61	peak
9	5875.000	50.39	1.23	51.62	105.20	-53.58	peak
10	5925.000	50.96	1.37	52.33	68.20	-15.87	peak
11	5972.000	52.54	1.50	54.04	68.20	-14.16	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

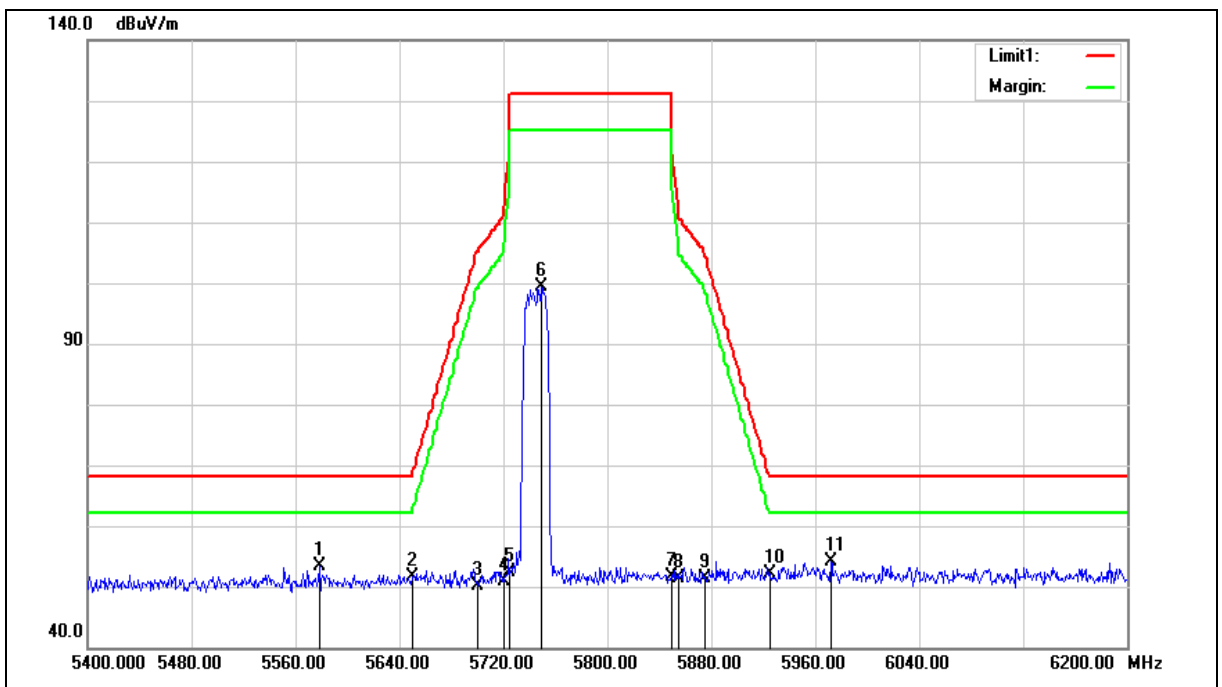

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5578.400	52.94	0.43	53.37	68.20	-14.83	peak
2	5650.000	51.09	0.62	51.71	68.20	-16.49	peak
3	5700.000	49.28	0.75	50.03	105.20	-55.17	peak
4	5720.000	50.00	0.81	50.81	110.80	-59.99	peak
5	5725.000	51.65	0.82	52.47	122.20	-69.73	peak
6	5748.800	98.37	0.89	99.26	--	--	peak
7	5850.000	50.44	1.17	51.61	122.20	-70.59	peak
8	5855.000	50.29	1.18	51.47	110.80	-59.33	peak
9	5875.000	50.27	1.23	51.50	105.20	-53.70	peak
10	5925.000	50.67	1.37	52.04	68.20	-16.16	peak
11	5972.000	52.65	1.50	54.15	68.20	-14.05	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

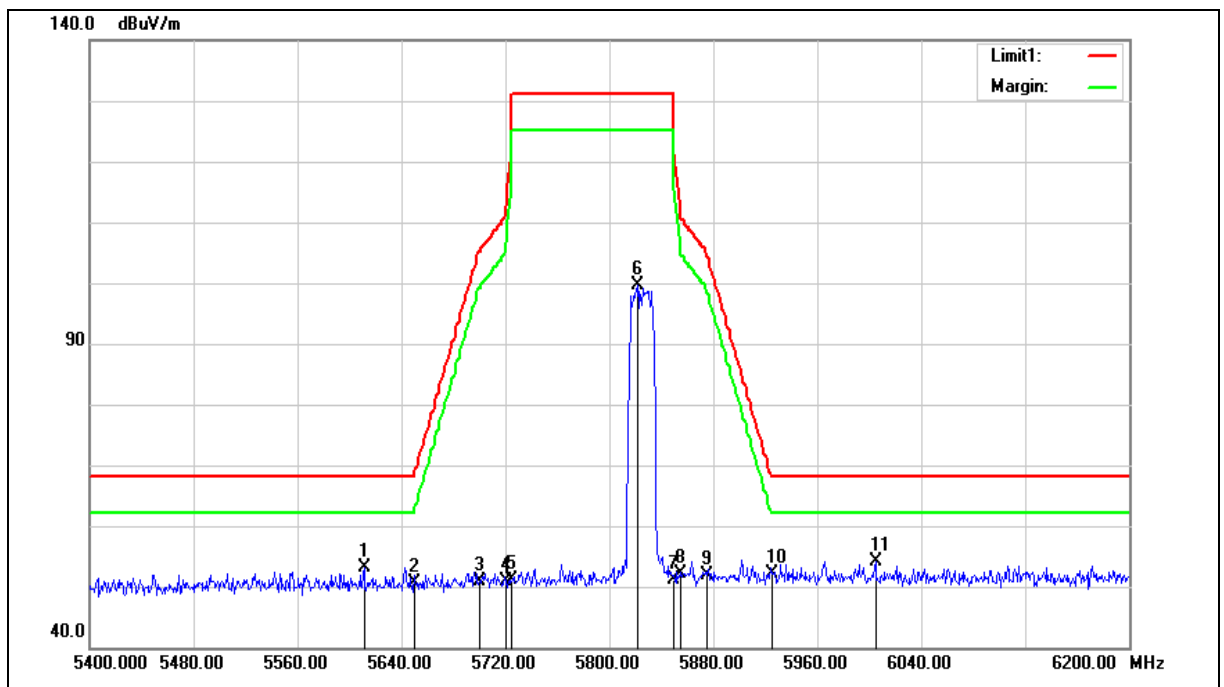

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5611.200	52.53	0.52	53.05	68.20	-15.15	peak
2	5650.000	50.08	0.62	50.70	68.20	-17.50	peak
3	5700.000	50.24	0.75	50.99	105.20	-54.21	peak
4	5720.000	50.18	0.81	50.99	110.80	-59.81	peak
5	5725.000	50.27	0.82	51.09	122.20	-71.11	peak
6	5821.600	98.46	1.09	99.55	--	--	peak
7	5850.000	50.03	1.17	51.20	122.20	-71.00	peak
8	5855.000	51.02	1.18	52.20	110.80	-58.60	peak
9	5875.000	50.74	1.23	51.97	105.20	-53.23	peak
10	5925.000	50.80	1.37	52.17	68.20	-16.03	peak
11	6004.800	52.44	1.58	54.02	68.20	-14.18	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

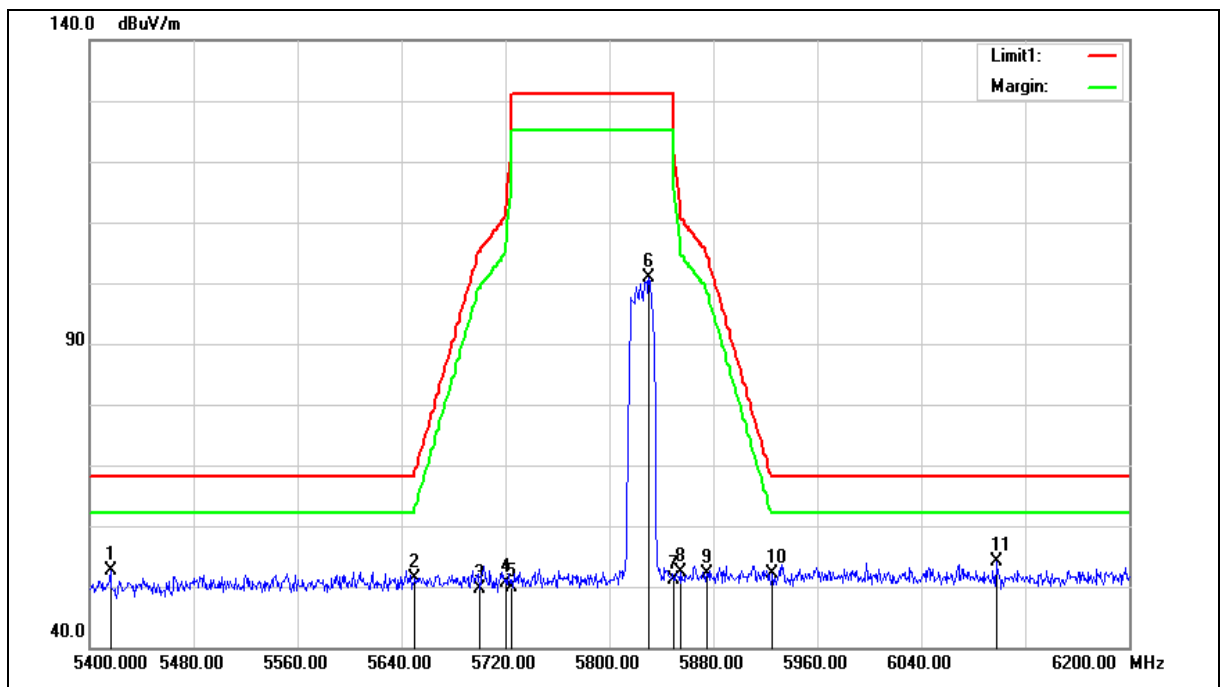

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5416.000	52.58	0.05	52.63	68.20	-15.57	peak
2	5650.000	50.81	0.62	51.43	68.20	-16.77	peak
3	5700.000	48.89	0.75	49.64	105.20	-55.56	peak
4	5720.000	49.93	0.81	50.74	110.80	-60.06	peak
5	5725.000	48.94	0.82	49.76	122.20	-72.44	peak
6	5830.400	99.83	1.11	100.94	--	--	peak
7	5850.000	50.01	1.17	51.18	122.20	-71.02	peak
8	5855.000	51.18	1.18	52.36	110.80	-58.44	peak
9	5875.000	50.87	1.23	52.10	105.20	-53.10	peak
10	5925.000	50.86	1.37	52.23	68.20	-15.97	peak
11	6098.400	52.08	1.93	54.01	68.20	-14.19	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

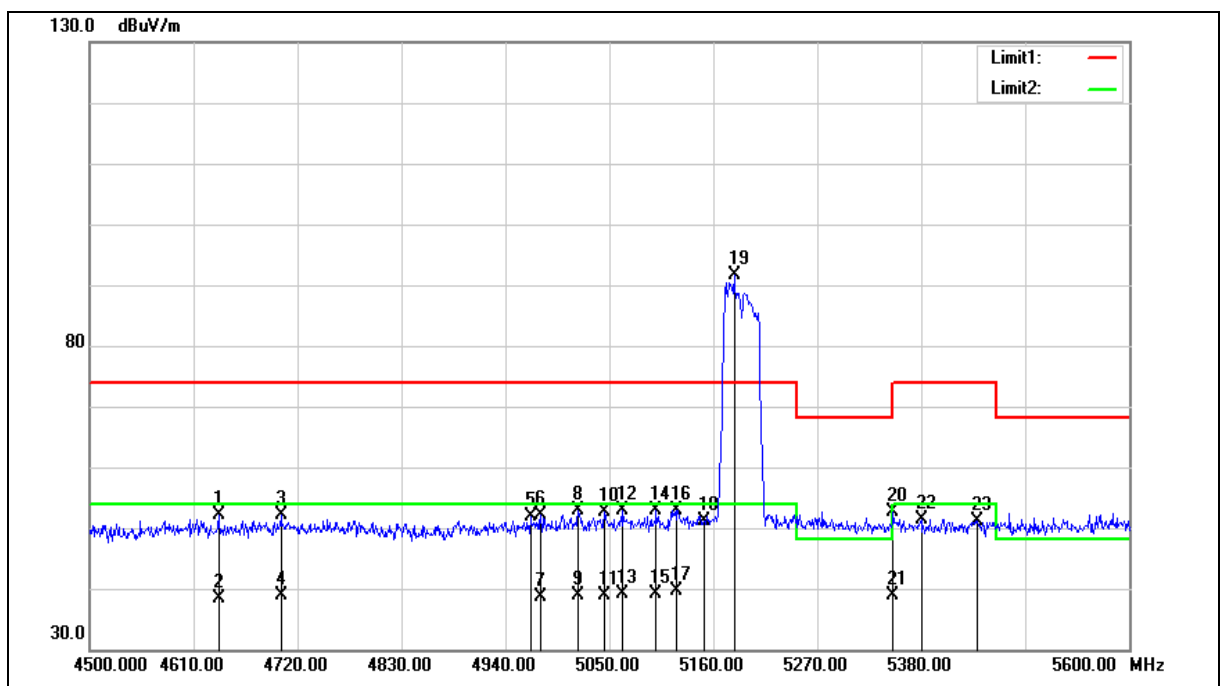

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4636.400	53.96	-1.76	52.20	74.00	-21.80	peak
2	4636.400	40.08	-1.76	38.32	54.00	-15.68	AVG
3	4702.400	53.79	-1.59	52.20	74.00	-21.80	peak
4	4702.400	40.42	-1.59	38.83	54.00	-15.17	AVG
5	4966.400	52.78	-0.87	51.91	74.00	-22.09	peak
6	4977.400	52.99	-0.83	52.16	74.00	-21.84	peak
7	4977.400	39.57	-0.83	38.74	54.00	-15.26	AVG
8	5017.000	53.61	-0.74	52.87	74.00	-21.13	peak
9	5017.000	39.65	-0.74	38.91	54.00	-15.09	AVG
10	5044.500	53.35	-0.68	52.67	74.00	-21.33	peak
11	5044.500	39.61	-0.68	38.93	54.00	-15.07	AVG
12	5064.300	53.50	-0.65	52.85	74.00	-21.15	peak
13	5064.300	39.71	-0.65	39.06	54.00	-14.94	AVG
14	5099.500	53.47	-0.57	52.90	74.00	-21.10	peak
15	5099.500	39.71	-0.57	39.14	54.00	-14.86	AVG
16	5121.500	53.52	-0.53	52.99	74.00	-21.01	peak
17	5121.500	40.04	-0.53	39.51	54.00	-14.49	AVG
18	5150.000	51.61	-0.48	51.13	74.00	-22.87	peak
19	5182.000	91.95	-0.40	91.55	--	--	peak
20	5350.000	52.63	-0.08	52.55	74.00	-21.45	peak
21	5350.000	39.04	-0.08	38.96	54.00	-15.04	AVG
22	5380.000	51.44	-0.03	51.41	74.00	-22.59	peak
23	5439.400	51.14	0.09	51.23	74.00	-22.77	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

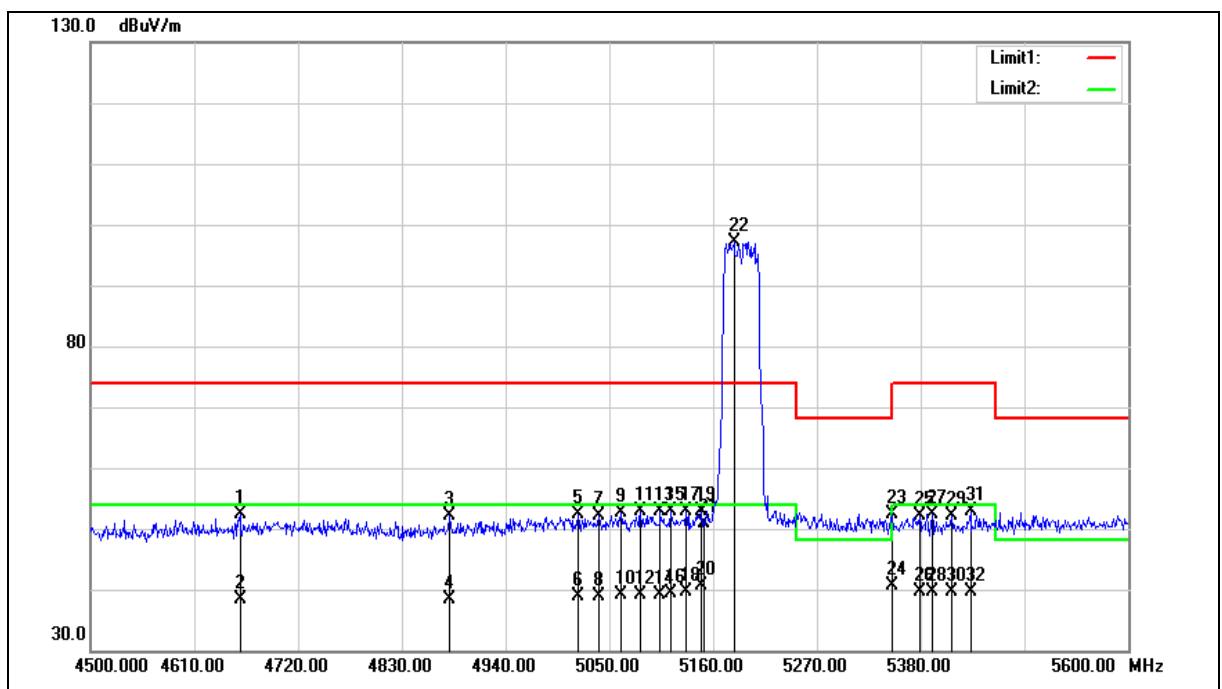

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4658.400	54.10	-1.70	52.40	74.00	-21.60	peak
2	4658.400	40.03	-1.70	38.33	54.00	-15.67	AVG
3	4880.600	53.17	-1.10	52.07	74.00	-21.93	peak
4	4880.600	39.44	-1.10	38.34	54.00	-15.66	AVG
5	5017.000	53.06	-0.74	52.32	74.00	-21.68	peak
6	5017.000	39.70	-0.74	38.96	54.00	-15.04	AVG
7	5039.000	52.72	-0.69	52.03	74.00	-21.97	peak
8	5039.000	39.66	-0.69	38.97	54.00	-15.03	AVG
9	5062.100	53.32	-0.65	52.67	74.00	-21.33	peak
10	5062.100	39.75	-0.65	39.10	54.00	-14.90	AVG
11	5083.000	53.40	-0.60	52.80	74.00	-21.20	peak
12	5083.000	39.84	-0.60	39.24	54.00	-14.76	AVG
13	5103.900	53.51	-0.57	52.94	74.00	-21.06	peak
14	5103.900	39.79	-0.57	39.22	54.00	-14.78	AVG
15	5114.900	53.53	-0.54	52.99	74.00	-21.01	peak
16	5114.900	39.99	-0.54	39.45	54.00	-14.55	AVG
17	5131.400	53.39	-0.51	52.88	74.00	-21.12	peak
18	5131.400	40.04	-0.51	39.53	54.00	-14.47	AVG
19	5147.900	53.41	-0.48	52.93	74.00	-21.07	peak
20	5147.900	41.08	-0.48	40.60	54.00	-13.40	AVG
21	5150.000	51.34	-0.48	50.86	74.00	-23.14	peak
22	5182.000	97.52	-0.40	97.12	--	--	peak
23	5350.000	52.58	-0.08	52.50	74.00	-21.50	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
24	5350.000	40.73	-0.08	40.65	54.00	-13.35	AVG
25	5378.900	52.13	-0.03	52.10	74.00	-21.90	peak
26	5378.900	39.54	-0.03	39.51	54.00	-14.49	AVG
27	5392.100	52.36	0.00	52.36	74.00	-21.64	peak
28	5392.100	39.57	0.00	39.57	54.00	-14.43	AVG
29	5413.000	52.06	0.04	52.10	74.00	-21.90	peak
30	5413.000	39.56	0.04	39.60	54.00	-14.40	AVG
31	5432.800	52.87	0.09	52.96	74.00	-21.04	peak
32	5432.800	39.50	0.09	39.59	54.00	-14.41	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

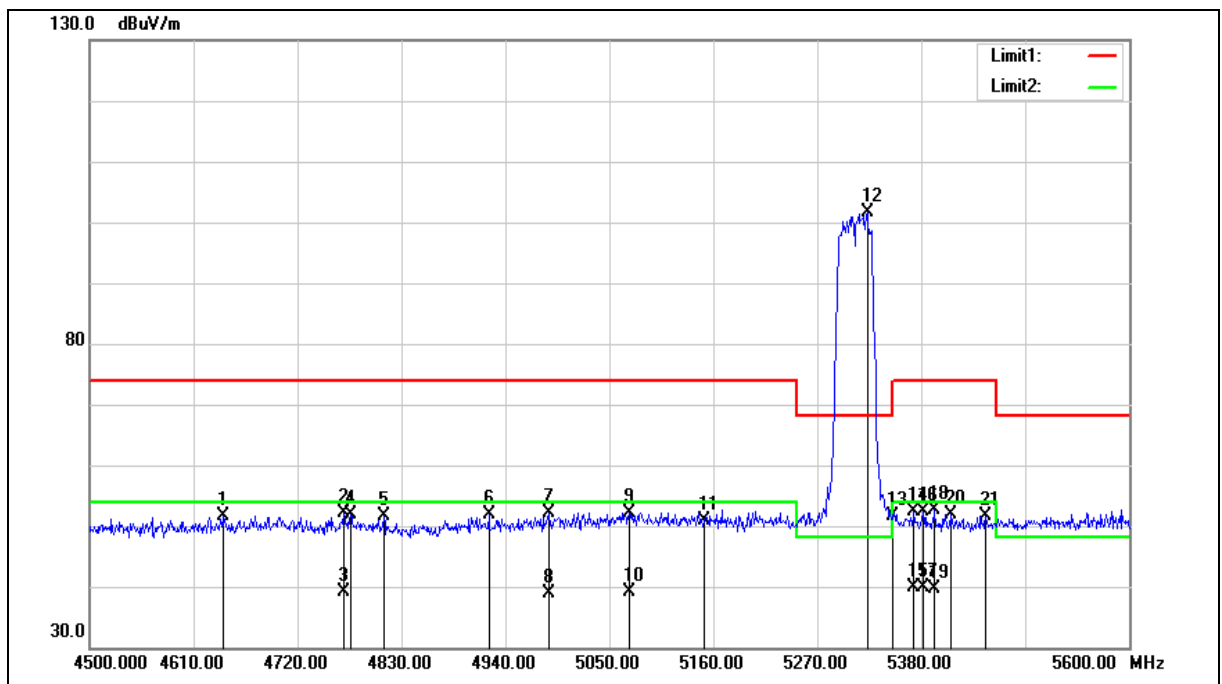

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4640.800	53.28	-1.76	51.52	74.00	-22.48	peak
2	4768.400	53.55	-1.41	52.14	74.00	-21.86	peak
3	4768.400	40.42	-1.41	39.01	54.00	-14.99	AVG
4	4776.100	53.31	-1.39	51.92	74.00	-22.08	peak
5	4811.300	52.92	-1.29	51.63	74.00	-22.37	peak
6	4922.400	52.83	-0.99	51.84	74.00	-22.16	peak
7	4986.200	53.06	-0.81	52.25	74.00	-21.75	peak
8	4986.200	39.79	-0.81	38.98	54.00	-15.02	AVG
9	5070.900	52.85	-0.63	52.22	74.00	-21.78	peak
10	5070.900	39.65	-0.63	39.02	54.00	-14.98	AVG
11	5150.000	51.36	-0.48	50.88	74.00	-23.12	peak
12	5322.800	101.74	-0.14	101.60	--	--	peak
13	5350.000	51.68	-0.08	51.60	74.00	-22.40	peak
14	5372.300	52.37	-0.03	52.34	74.00	-21.66	peak
15	5372.300	39.94	-0.03	39.91	54.00	-14.09	AVG
16	5382.200	52.34	-0.02	52.32	74.00	-21.68	peak
17	5382.200	39.78	-0.02	39.76	54.00	-14.24	AVG
18	5394.300	52.68	0.01	52.69	74.00	-21.31	peak
19	5394.300	39.67	0.01	39.68	54.00	-14.32	AVG
20	5410.800	51.75	0.04	51.79	74.00	-22.21	peak
21	5448.200	51.57	0.12	51.69	74.00	-22.31	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

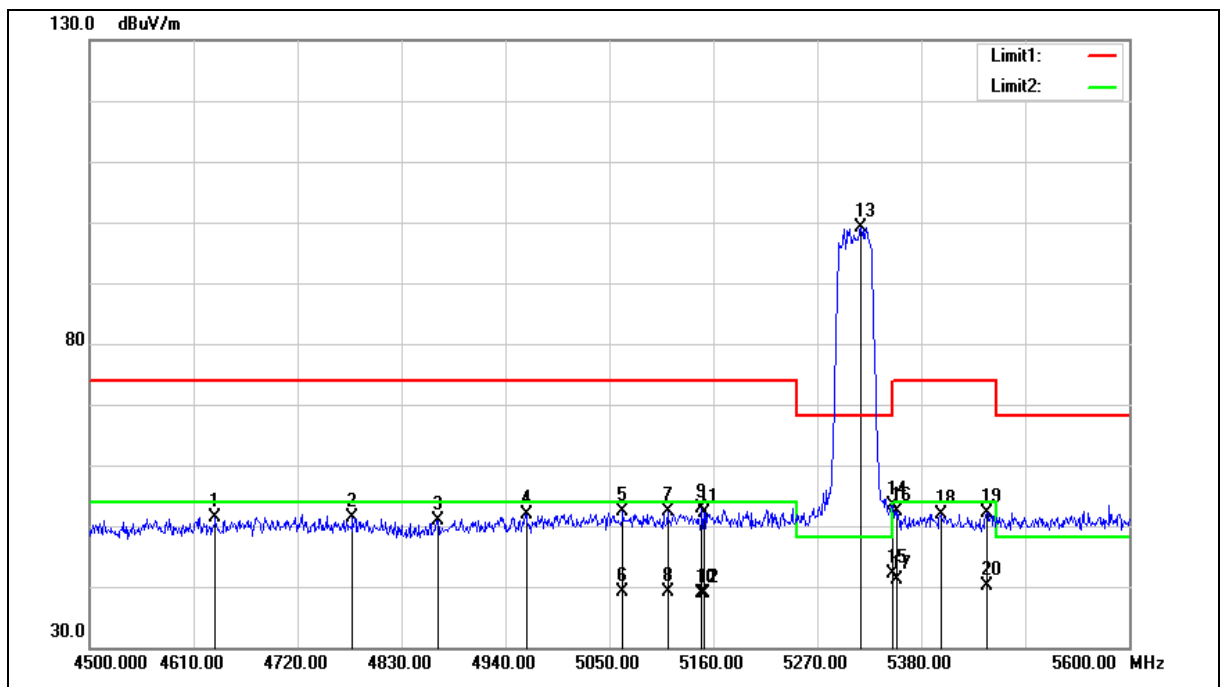

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4633.100	53.25	-1.78	51.47	74.00	-22.53	peak
2	4778.300	52.76	-1.38	51.38	74.00	-22.62	peak
3	4868.500	51.99	-1.13	50.86	74.00	-23.14	peak
4	4962.000	52.81	-0.88	51.93	74.00	-22.07	peak
5	5064.300	52.97	-0.65	52.32	74.00	-21.68	peak
6	5064.300	39.71	-0.65	39.06	54.00	-14.94	AVG
7	5111.600	53.04	-0.55	52.49	74.00	-21.51	peak
8	5111.600	39.56	-0.55	39.01	54.00	-14.99	AVG
9	5147.900	53.36	-0.48	52.88	74.00	-21.12	peak
10	5147.900	39.41	-0.48	38.93	54.00	-15.07	AVG
11	5150.000	52.51	-0.48	52.03	74.00	-21.97	peak
12	5150.000	39.40	-0.48	38.92	54.00	-15.08	AVG
13	5316.200	99.34	-0.15	99.19	--	--	peak
14	5350.000	53.44	-0.08	53.36	74.00	-20.64	peak
15	5350.000	42.09	-0.08	42.01	54.00	-11.99	AVG
16	5354.700	52.52	-0.08	52.44	74.00	-21.56	peak
17	5354.700	41.27	-0.08	41.19	54.00	-12.81	AVG
18	5400.900	51.78	0.02	51.80	74.00	-22.20	peak
19	5449.300	51.94	0.12	52.06	74.00	-21.94	peak
20	5449.300	39.90	0.12	40.02	54.00	-13.98	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

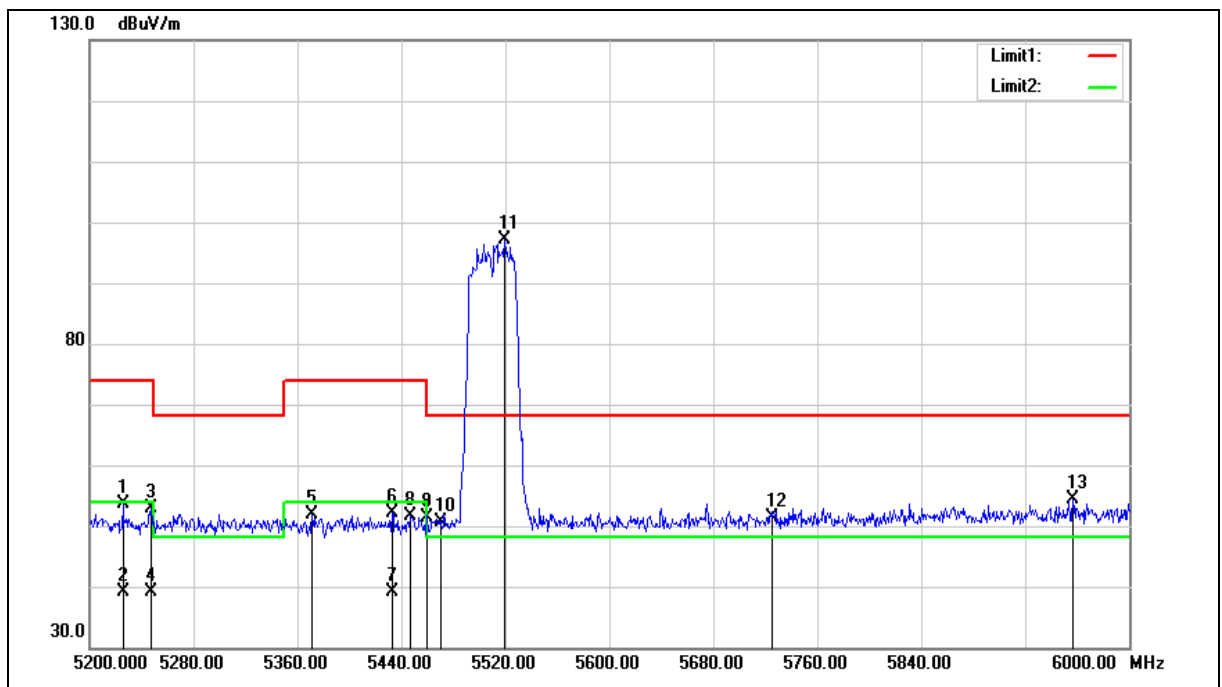

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5225.600	53.95	-0.32	53.63	74.00	-20.37	peak
2	5225.600	39.39	-0.32	39.07	54.00	-14.93	AVG
3	5247.200	53.19	-0.28	52.91	74.00	-21.09	peak
4	5247.200	39.39	-0.28	39.11	54.00	-14.89	AVG
5	5371.200	52.01	-0.03	51.98	74.00	-22.02	peak
6	5432.800	52.12	0.09	52.21	74.00	-21.79	peak
7	5432.800	39.16	0.09	39.25	54.00	-14.75	AVG
8	5446.400	51.42	0.11	51.53	74.00	-22.47	peak
9	5460.000	51.26	0.14	51.40	74.00	-22.60	peak
10	5470.000	50.58	0.16	50.74	68.20	-17.46	peak
11	5519.200	96.87	0.27	97.14	--	--	peak
12	5725.000	50.52	0.82	51.34	68.20	-16.86	peak
13	5956.800	52.87	1.45	54.32	68.20	-13.88	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

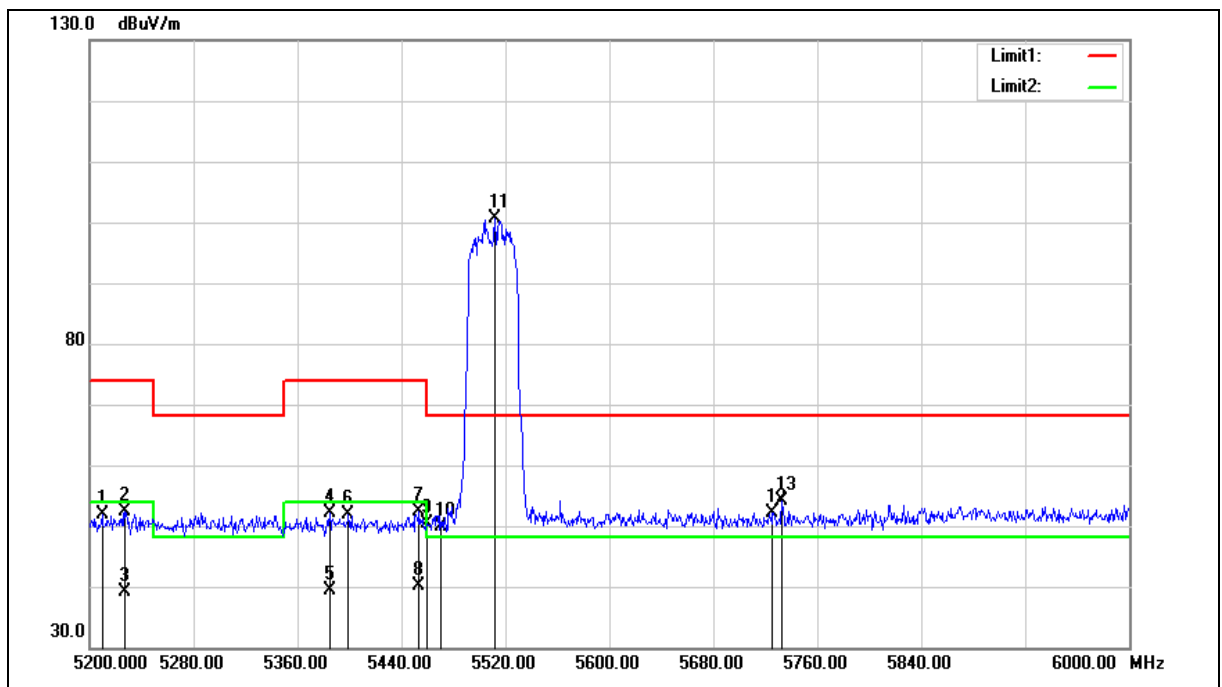

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5209.600	52.22	-0.36	51.86	74.00	-22.14	peak
2	5227.200	52.66	-0.32	52.34	74.00	-21.66	peak
3	5227.200	39.43	-0.32	39.11	54.00	-14.89	AVG
4	5384.800	52.12	-0.01	52.11	74.00	-21.89	peak
5	5384.800	39.35	-0.01	39.34	54.00	-14.66	AVG
6	5399.200	51.84	0.02	51.86	74.00	-22.14	peak
7	5453.600	52.15	0.12	52.27	74.00	-21.73	peak
8	5453.600	39.93	0.12	40.05	54.00	-13.95	AVG
9	5460.000	50.31	0.14	50.45	74.00	-23.55	peak
10	5470.000	49.76	0.16	49.92	68.20	-18.28	peak
11	5512.000	100.35	0.25	100.60	--	--	peak
12	5725.000	51.42	0.82	52.24	68.20	-15.96	peak
13	5732.800	53.28	0.85	54.13	68.20	-14.07	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

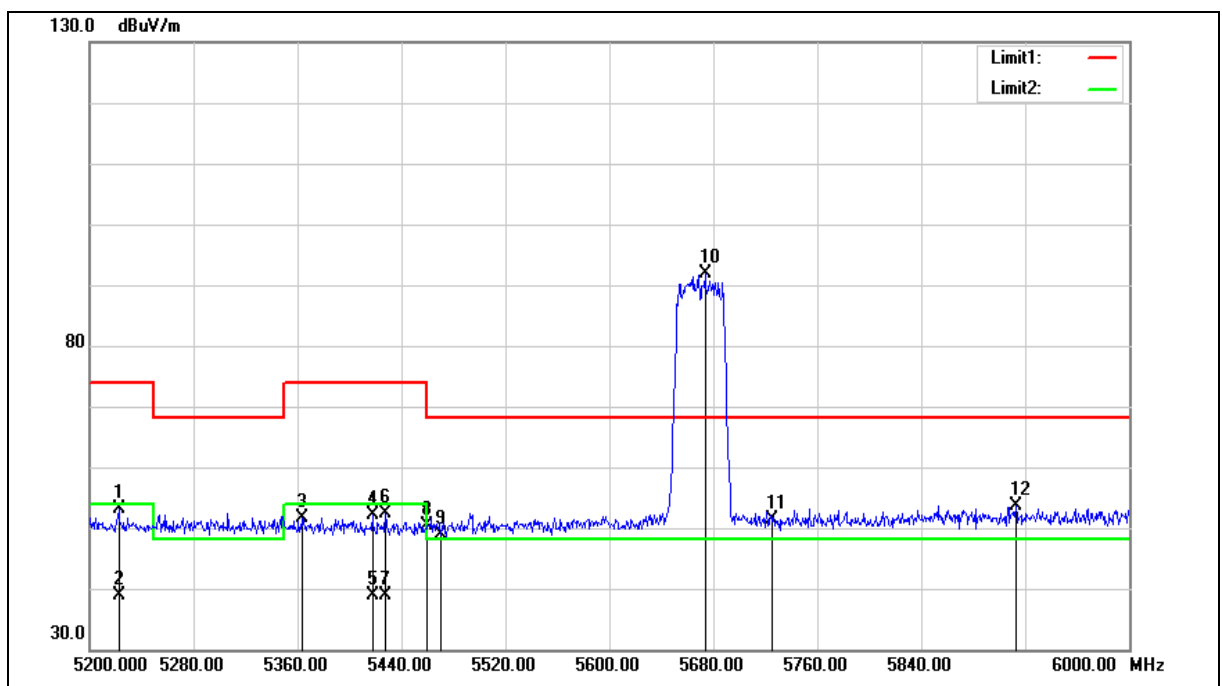

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5222.400	53.42	-0.33	53.09	74.00	-20.91	peak
2	5222.400	39.18	-0.33	38.85	54.00	-15.15	AVG
3	5363.200	51.75	-0.06	51.69	74.00	-22.31	peak
4	5417.600	52.00	0.05	52.05	74.00	-21.95	peak
5	5417.600	38.76	0.05	38.81	54.00	-15.19	AVG
6	5427.200	52.31	0.07	52.38	74.00	-21.62	peak
7	5427.200	38.92	0.07	38.99	54.00	-15.01	AVG
8	5460.000	50.25	0.14	50.39	74.00	-23.61	peak
9	5470.000	48.80	0.16	48.96	68.20	-19.24	peak
10	5673.600	91.32	0.68	92.00	--	--	peak
11	5725.000	50.52	0.82	51.34	68.20	-16.86	peak
12	5912.800	52.37	1.33	53.70	68.20	-14.50	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

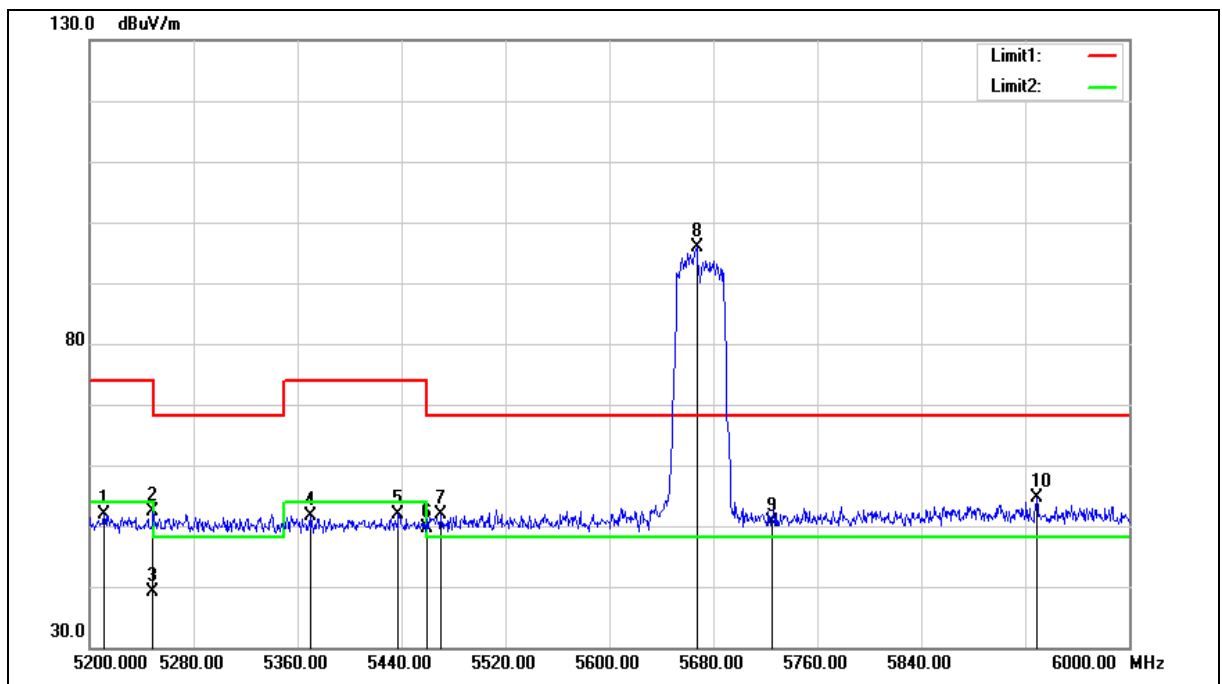

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5211.200	52.33	-0.35	51.98	74.00	-22.02	peak
2	5248.800	52.73	-0.28	52.45	74.00	-21.55	peak
3	5248.800	39.43	-0.28	39.15	54.00	-14.85	AVG
4	5369.600	51.61	-0.03	51.58	74.00	-22.42	peak
5	5437.600	51.76	0.09	51.85	74.00	-22.15	peak
6	5460.000	49.47	0.14	49.61	74.00	-24.39	peak
7	5470.000	51.64	0.16	51.80	68.20	-16.40	peak
8	5667.200	95.11	0.67	95.78	--	--	peak
9	5725.000	49.91	0.82	50.73	68.20	-17.47	peak
10	5928.800	53.17	1.38	54.55	68.20	-13.65	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

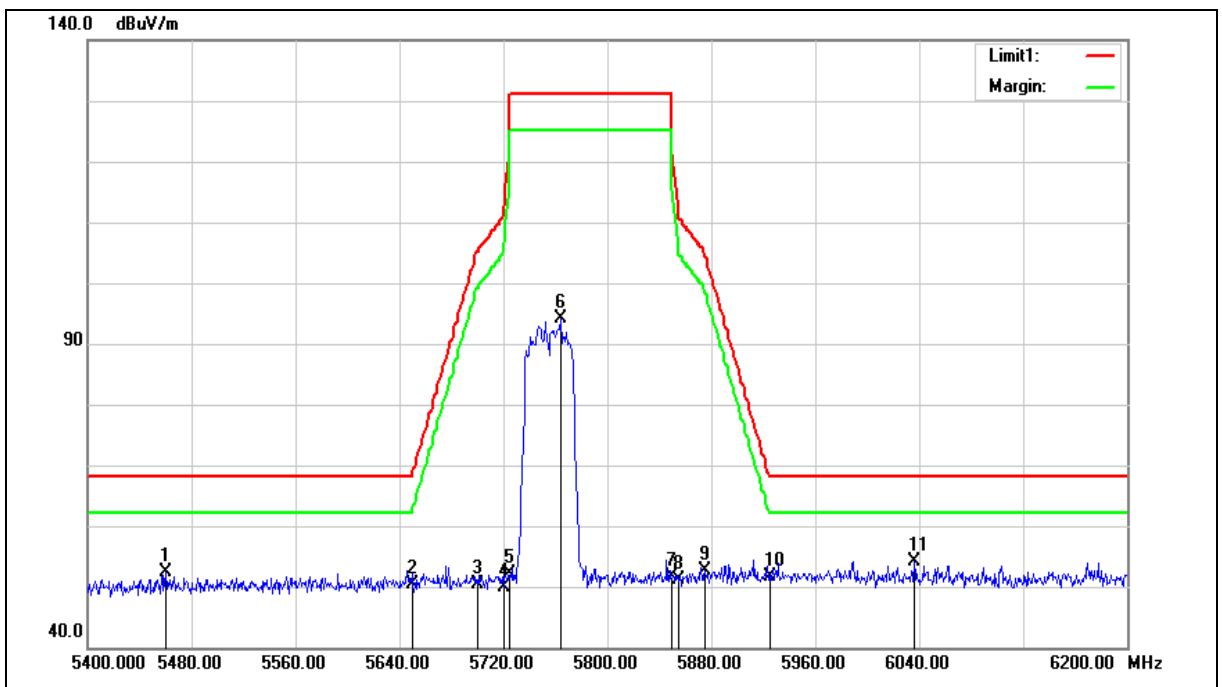

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	52.34	0.14	52.48	68.20	-15.72	peak
2	5650.000	49.79	0.62	50.41	68.20	-17.79	peak
3	5700.000	49.51	0.75	50.26	105.20	-54.94	peak
4	5720.000	49.05	0.81	49.86	110.80	-60.94	peak
5	5725.000	51.32	0.82	52.14	122.20	-70.06	peak
6	5764.000	93.16	0.93	94.09	--	--	peak
7	5850.000	50.51	1.17	51.68	122.20	-70.52	peak
8	5855.000	50.02	1.18	51.20	110.80	-59.60	peak
9	5875.000	51.35	1.23	52.58	105.20	-52.62	peak
10	5925.000	50.21	1.37	51.58	68.20	-16.62	peak
11	6036.000	52.54	1.70	54.24	68.20	-13.96	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

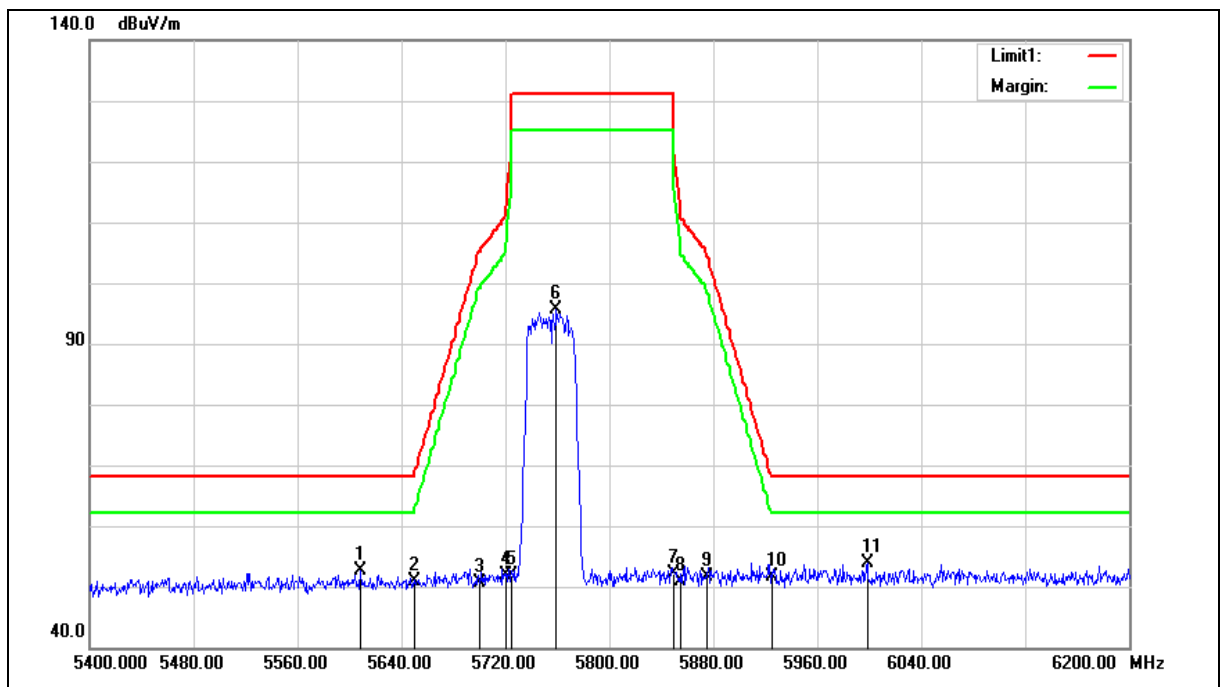

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5608.000	52.02	0.51	52.53	68.20	-15.67	peak
2	5650.000	50.33	0.62	50.95	68.20	-17.25	peak
3	5700.000	49.85	0.75	50.60	105.20	-54.60	peak
4	5720.000	51.00	0.81	51.81	110.80	-58.99	peak
5	5725.000	51.03	0.82	51.85	122.20	-70.35	peak
6	5759.200	94.72	0.91	95.63	--	--	peak
7	5850.000	50.96	1.17	52.13	122.20	-70.07	peak
8	5855.000	49.63	1.18	50.81	110.80	-59.99	peak
9	5875.000	50.35	1.23	51.58	105.20	-53.62	peak
10	5925.000	50.24	1.37	51.61	68.20	-16.59	peak
11	5998.400	52.25	1.57	53.82	68.20	-14.38	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

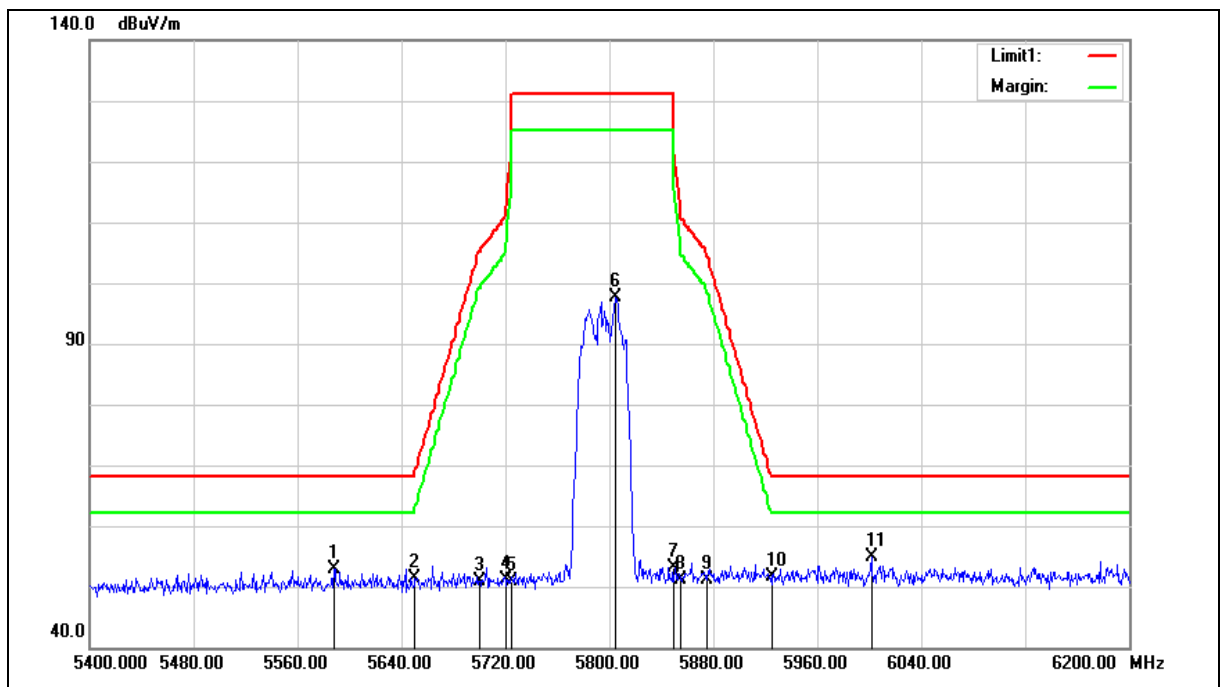

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5588.000	52.48	0.46	52.94	68.20	-15.26	peak
2	5650.000	50.67	0.62	51.29	68.20	-16.91	peak
3	5700.000	50.14	0.75	50.89	105.20	-54.31	peak
4	5720.000	50.34	0.81	51.15	110.80	-59.65	peak
5	5725.000	49.95	0.82	50.77	122.20	-71.43	peak
6	5804.800	96.62	1.05	97.67	--	--	peak
7	5850.000	51.94	1.17	53.11	122.20	-69.09	peak
8	5855.000	50.01	1.18	51.19	110.80	-59.61	peak
9	5875.000	49.93	1.23	51.16	105.20	-54.04	peak
10	5925.000	50.19	1.37	51.56	68.20	-16.64	peak
11	6001.600	53.28	1.57	54.85	68.20	-13.35	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

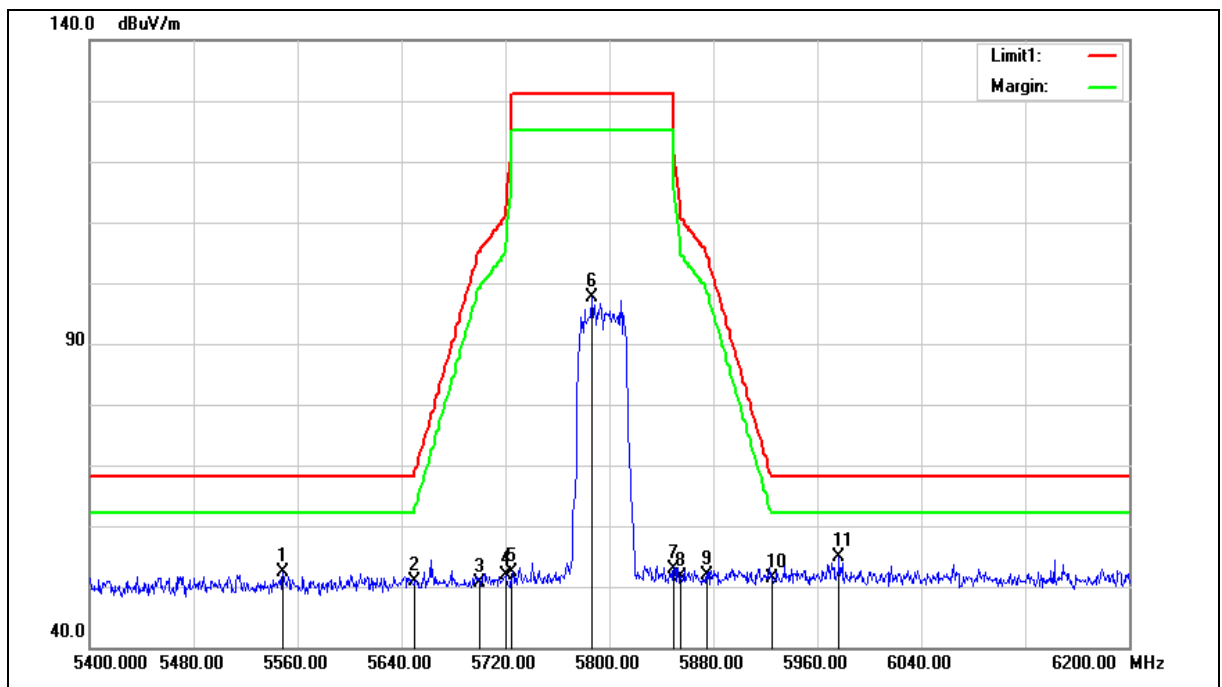

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5548.800	51.97	0.35	52.32	68.20	-15.88	peak
2	5650.000	50.38	0.62	51.00	68.20	-17.20	peak
3	5700.000	49.97	0.75	50.72	105.20	-54.48	peak
4	5720.000	51.01	0.81	51.82	110.80	-58.98	peak
5	5725.000	51.52	0.82	52.34	122.20	-69.86	peak
6	5786.400	96.64	0.99	97.63	--	--	peak
7	5850.000	51.73	1.17	52.90	122.20	-69.30	peak
8	5855.000	50.50	1.18	51.68	110.80	-59.12	peak
9	5875.000	50.53	1.23	51.76	105.20	-53.44	peak
10	5925.000	49.93	1.37	51.30	68.20	-16.90	peak
11	5976.800	53.36	1.50	54.86	68.20	-13.34	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

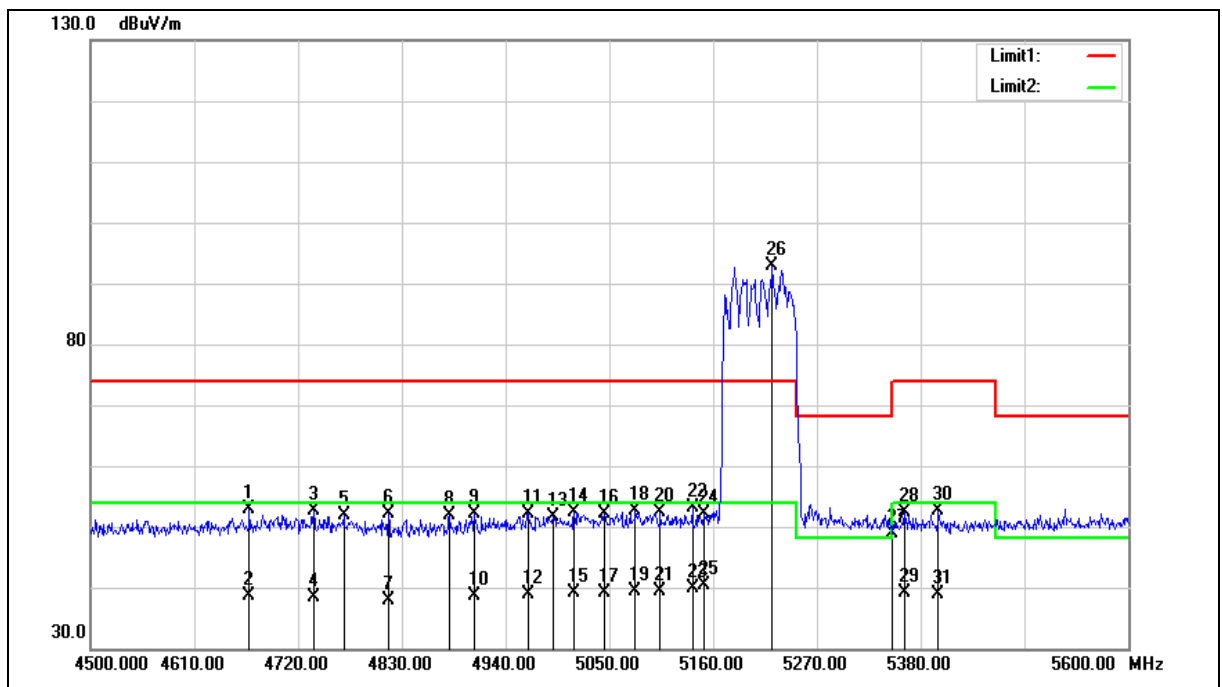

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4668.300	54.47	-1.69	52.78	74.00	-21.22	peak
2	4668.300	40.24	-1.69	38.55	54.00	-15.45	AVG
3	4736.500	54.15	-1.49	52.66	74.00	-21.34	peak
4	4736.500	39.83	-1.49	38.34	54.00	-15.66	AVG
5	4768.400	53.21	-1.41	51.80	74.00	-22.20	peak
6	4815.700	53.35	-1.28	52.07	74.00	-21.93	peak
7	4815.700	39.28	-1.28	38.00	54.00	-16.00	AVG
8	4880.600	53.09	-1.10	51.99	74.00	-22.01	peak
9	4907.000	53.12	-1.02	52.10	74.00	-21.90	peak
10	4907.000	39.75	-1.02	38.73	54.00	-15.27	AVG
11	4964.200	53.10	-0.87	52.23	74.00	-21.77	peak
12	4964.200	39.77	-0.87	38.90	54.00	-15.10	AVG
13	4990.600	52.41	-0.79	51.62	74.00	-22.38	peak
14	5012.600	53.07	-0.74	52.33	74.00	-21.67	peak
15	5012.600	39.87	-0.74	39.13	54.00	-14.87	AVG
16	5044.500	52.74	-0.68	52.06	74.00	-21.94	peak
17	5044.500	39.91	-0.68	39.23	54.00	-14.77	AVG
18	5077.500	53.26	-0.62	52.64	74.00	-21.36	peak
19	5077.500	39.93	-0.62	39.31	54.00	-14.69	AVG
20	5103.900	52.93	-0.57	52.36	74.00	-21.64	peak
21	5103.900	39.90	-0.57	39.33	54.00	-14.67	AVG
22	5138.000	53.73	-0.49	53.24	74.00	-20.76	peak
23	5138.000	40.27	-0.49	39.78	54.00	-14.22	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
24	5150.000	52.61	-0.48	52.13	74.00	-21.87	peak
25	5150.000	40.87	-0.48	40.39	54.00	-13.61	AVG
26	5222.700	93.28	-0.33	92.95	--	--	peak
27	5350.000	48.89	-0.08	48.81	74.00	-25.19	peak
28	5362.400	52.51	-0.06	52.45	74.00	-21.55	peak
29	5362.400	39.11	-0.06	39.05	54.00	-14.95	AVG
30	5398.700	52.63	0.02	52.65	74.00	-21.35	peak
31	5398.700	38.87	0.02	38.89	54.00	-15.11	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

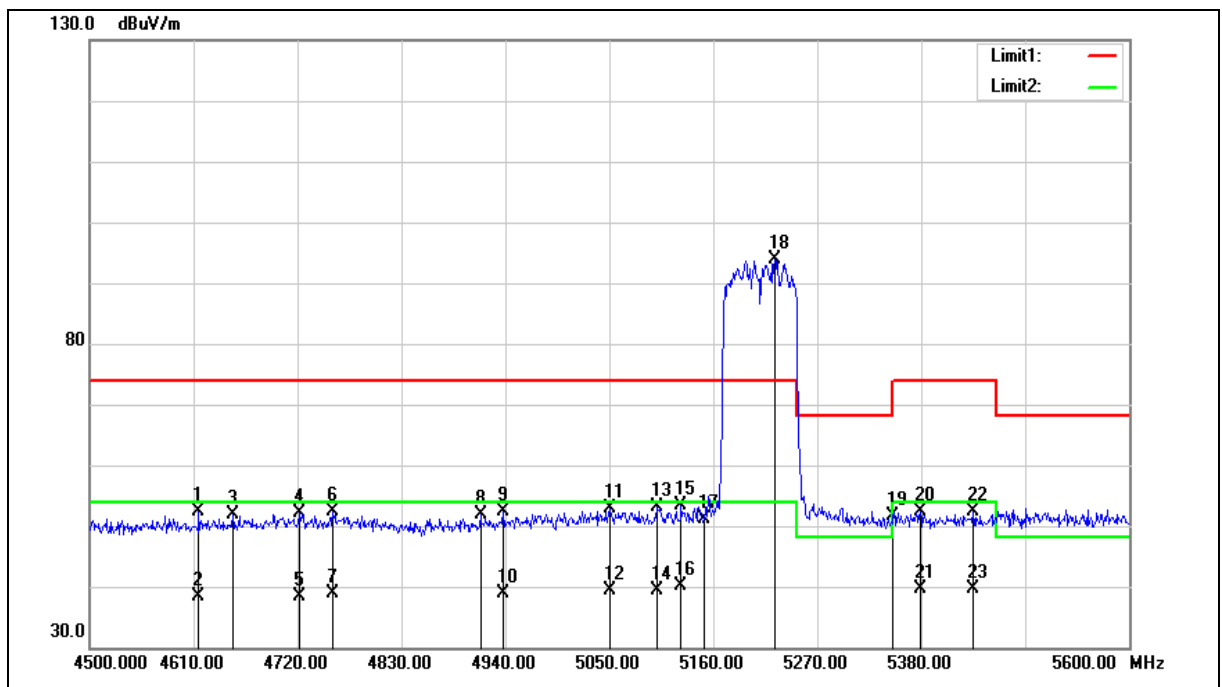

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4615.500	54.32	-1.82	52.50	74.00	-21.50	peak
2	4615.500	40.20	-1.82	38.38	54.00	-15.62	AVG
3	4651.800	53.57	-1.73	51.84	74.00	-22.16	peak
4	4722.200	53.64	-1.53	52.11	74.00	-21.89	peak
5	4722.200	39.90	-1.53	38.37	54.00	-15.63	AVG
6	4757.400	53.76	-1.44	52.32	74.00	-21.68	peak
7	4757.400	40.34	-1.44	38.90	54.00	-15.10	AVG
8	4913.600	52.96	-1.01	51.95	74.00	-22.05	peak
9	4937.800	53.36	-0.94	52.42	74.00	-21.58	peak
10	4937.800	39.70	-0.94	38.76	54.00	-15.24	AVG
11	5050.000	53.53	-0.68	52.85	74.00	-21.15	peak
12	5050.000	39.94	-0.68	39.26	54.00	-14.74	AVG
13	5100.600	53.62	-0.57	53.05	74.00	-20.95	peak
14	5100.600	40.06	-0.57	39.49	54.00	-14.51	AVG
15	5125.900	53.80	-0.52	53.28	74.00	-20.72	peak
16	5125.900	40.65	-0.52	40.13	54.00	-13.87	AVG
17	5150.000	51.70	-0.48	51.22	74.00	-22.78	peak
18	5224.900	94.16	-0.32	93.84	--	--	peak
19	5350.000	51.78	-0.08	51.70	74.00	-22.30	peak
20	5378.900	52.29	-0.03	52.26	74.00	-21.74	peak
21	5378.900	39.67	-0.03	39.64	54.00	-14.36	AVG
22	5435.000	52.22	0.09	52.31	74.00	-21.69	peak
23	5435.000	39.54	0.09	39.63	54.00	-14.37	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

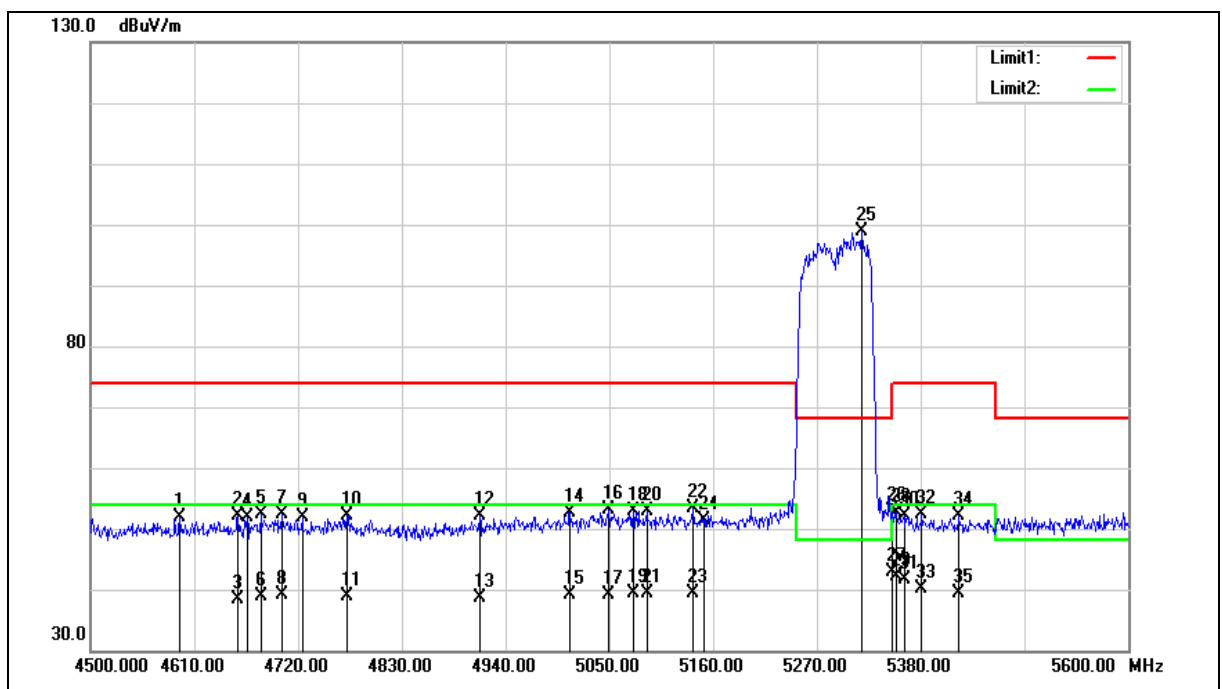

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4594.600	53.84	-1.88	51.96	74.00	-22.04	peak
2	4656.200	53.92	-1.72	52.20	74.00	-21.80	peak
3	4656.200	40.19	-1.72	38.47	54.00	-15.53	AVG
4	4666.100	53.56	-1.69	51.87	74.00	-22.13	peak
5	4680.400	53.96	-1.65	52.31	74.00	-21.69	peak
6	4680.400	40.41	-1.65	38.76	54.00	-15.24	AVG
7	4702.400	53.92	-1.59	52.33	74.00	-21.67	peak
8	4702.400	40.65	-1.59	39.06	54.00	-14.94	AVG
9	4724.400	53.33	-1.53	51.80	74.00	-22.20	peak
10	4771.700	53.57	-1.40	52.17	74.00	-21.83	peak
11	4771.700	40.39	-1.40	38.99	54.00	-15.01	AVG
12	4912.500	53.06	-1.01	52.05	74.00	-21.95	peak
13	4912.500	39.66	-1.01	38.65	54.00	-15.35	AVG
14	5008.200	53.41	-0.75	52.66	74.00	-21.34	peak
15	5008.200	39.83	-0.75	39.08	54.00	-14.92	AVG
16	5048.900	53.91	-0.68	53.23	74.00	-20.77	peak
17	5048.900	39.89	-0.68	39.21	54.00	-14.79	AVG
18	5075.300	53.39	-0.62	52.77	74.00	-21.23	peak
19	5075.300	39.95	-0.62	39.33	54.00	-14.67	AVG
20	5089.600	53.39	-0.60	52.79	74.00	-21.21	peak
21	5089.600	39.87	-0.60	39.27	54.00	-14.73	AVG
22	5139.100	53.99	-0.49	53.50	74.00	-20.50	peak
23	5139.100	39.80	-0.49	39.31	54.00	-14.69	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
24	5150.000	51.75	-0.48	51.27	74.00	-22.73	peak
25	5317.300	99.00	-0.15	98.85	--	--	peak
26	5350.000	53.06	-0.08	52.98	74.00	-21.02	peak
27	5350.000	42.84	-0.08	42.76	54.00	-11.24	AVG
28	5353.600	52.82	-0.08	52.74	74.00	-21.26	peak
29	5353.600	42.30	-0.08	42.22	54.00	-11.78	AVG
30	5362.400	52.25	-0.06	52.19	74.00	-21.81	peak
31	5362.400	41.67	-0.06	41.61	54.00	-12.39	AVG
32	5381.100	52.31	-0.03	52.28	74.00	-21.72	peak
33	5381.100	40.24	-0.03	40.21	54.00	-13.79	AVG
34	5420.700	52.14	0.06	52.20	74.00	-21.80	peak
35	5420.700	39.42	0.06	39.48	54.00	-14.52	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

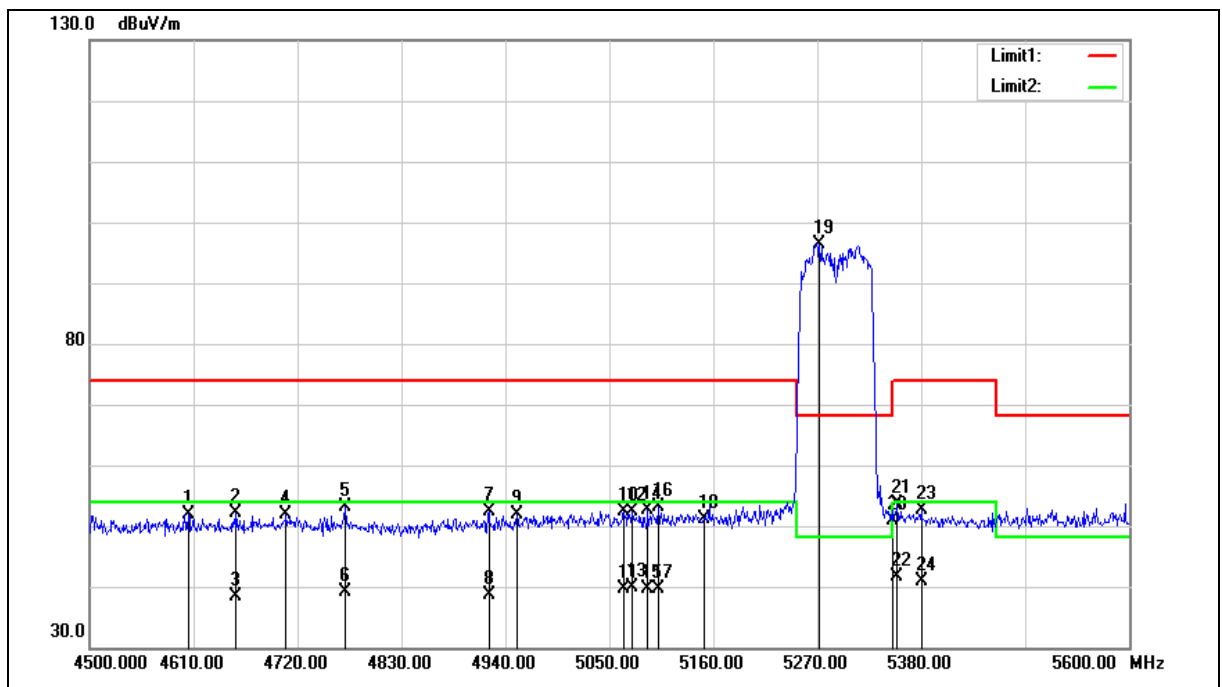

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4604.500	53.73	-1.86	51.87	74.00	-22.13	peak
2	4655.100	53.73	-1.72	52.01	74.00	-21.99	peak
3	4655.100	40.17	-1.72	38.45	54.00	-15.55	AVG
4	4707.900	53.51	-1.58	51.93	74.00	-22.07	peak
5	4770.600	54.60	-1.40	53.20	74.00	-20.80	peak
6	4770.600	40.44	-1.40	39.04	54.00	-14.96	AVG
7	4922.400	53.34	-0.99	52.35	74.00	-21.65	peak
8	4922.400	39.73	-0.99	38.74	54.00	-15.26	AVG
9	4952.100	52.81	-0.90	51.91	74.00	-22.09	peak
10	5065.400	52.94	-0.64	52.30	74.00	-21.70	peak
11	5065.400	40.35	-0.64	39.71	54.00	-14.29	AVG
12	5074.200	52.95	-0.62	52.33	74.00	-21.67	peak
13	5074.200	40.47	-0.62	39.85	54.00	-14.15	AVG
14	5090.700	53.33	-0.60	52.73	74.00	-21.27	peak
15	5090.700	40.29	-0.60	39.69	54.00	-14.31	AVG
16	5101.700	53.67	-0.57	53.10	74.00	-20.90	peak
17	5101.700	40.17	-0.57	39.60	54.00	-14.40	AVG
18	5150.000	51.72	-0.48	51.24	74.00	-22.76	peak
19	5272.200	96.66	-0.23	96.43	--	--	peak
20	5350.000	50.92	-0.08	50.84	74.00	-23.16	peak
21	5354.700	53.83	-0.08	53.75	74.00	-20.25	peak
22	5354.700	41.60	-0.08	41.52	54.00	-12.48	AVG
23	5380.000	52.63	-0.03	52.60	74.00	-21.40	peak
24	5380.000	40.91	-0.03	40.88	54.00	-13.12	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

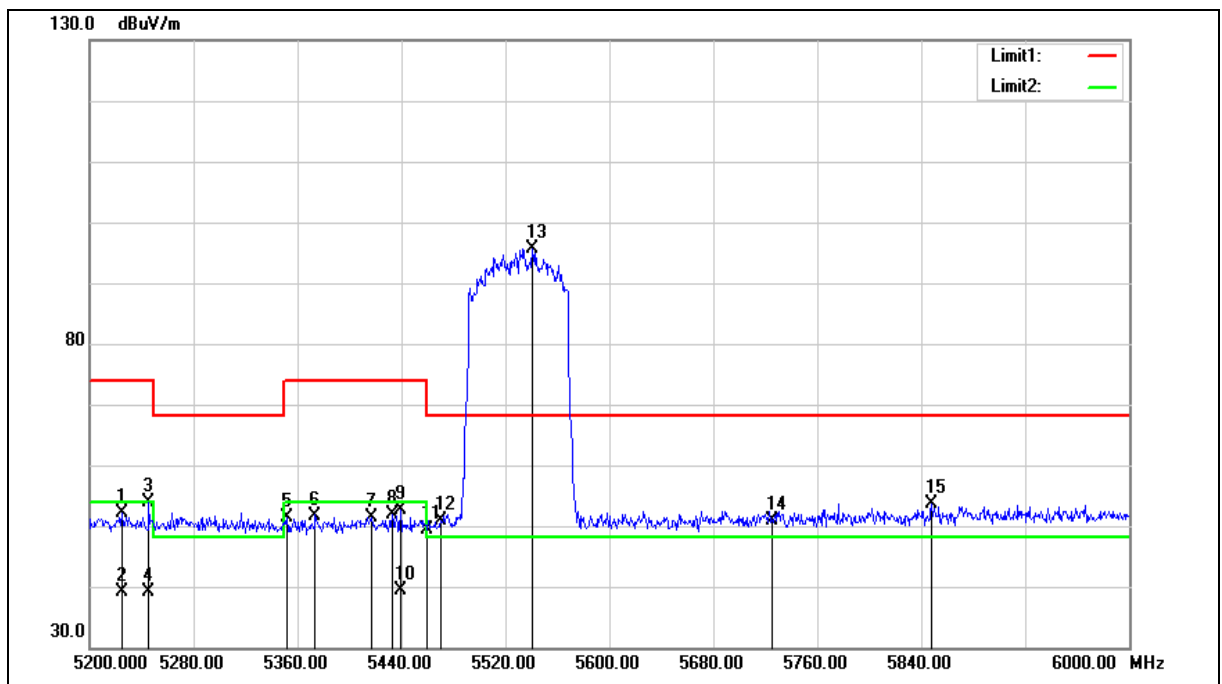

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5224.800	52.50	-0.32	52.18	74.00	-21.82	peak
2	5224.800	39.35	-0.32	39.03	54.00	-14.97	AVG
3	5245.600	54.14	-0.28	53.86	74.00	-20.14	peak
4	5245.600	39.32	-0.28	39.04	54.00	-14.96	AVG
5	5352.000	51.52	-0.08	51.44	74.00	-22.56	peak
6	5373.600	51.78	-0.03	51.75	74.00	-22.25	peak
7	5416.800	51.44	0.05	51.49	74.00	-22.51	peak
8	5432.800	51.70	0.09	51.79	74.00	-22.21	peak
9	5439.200	52.45	0.09	52.54	74.00	-21.46	peak
10	5439.200	39.36	0.09	39.45	54.00	-14.55	AVG
11	5460.000	49.13	0.14	49.27	74.00	-24.73	peak
12	5470.000	50.67	0.16	50.83	68.20	-17.37	peak
13	5540.800	95.25	0.33	95.58	--	--	peak
14	5725.000	49.99	0.82	50.81	68.20	-17.39	peak
15	5848.000	52.38	1.17	53.55	68.20	-14.65	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

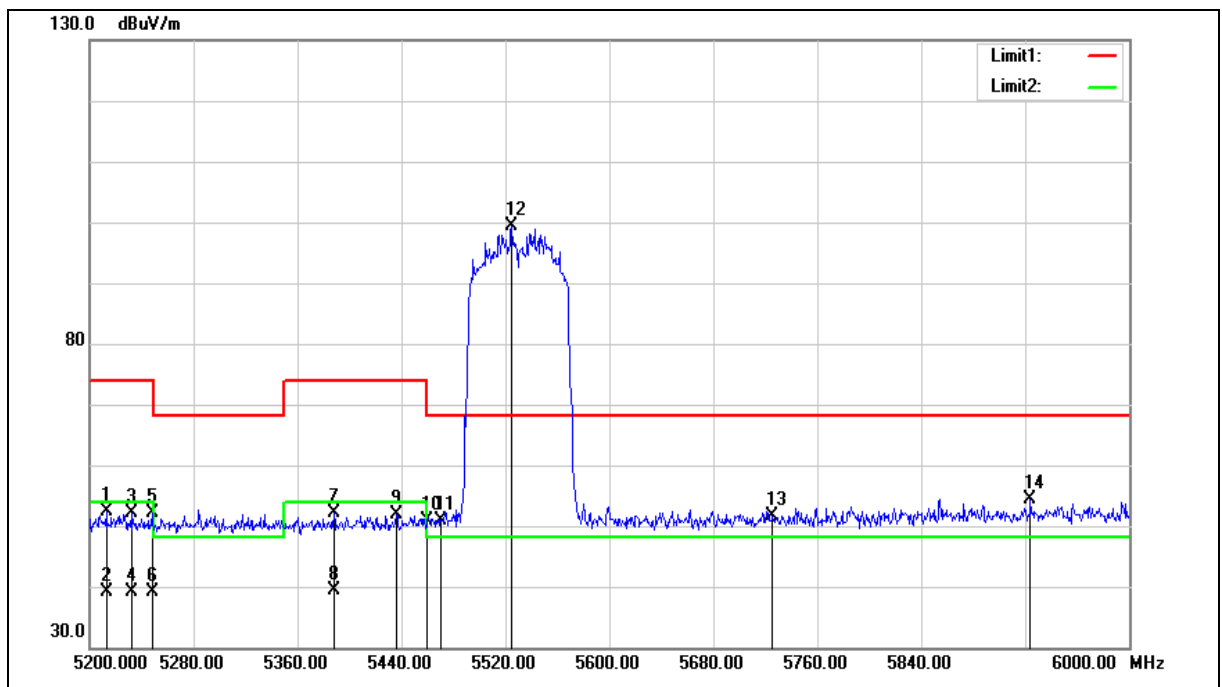

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5212.800	52.71	-0.35	52.36	74.00	-21.64	peak
2	5212.800	39.46	-0.35	39.11	54.00	-14.89	AVG
3	5232.000	52.50	-0.31	52.19	74.00	-21.81	peak
4	5232.000	39.36	-0.31	39.05	54.00	-14.95	AVG
5	5248.000	52.33	-0.28	52.05	74.00	-21.95	peak
6	5248.000	39.39	-0.28	39.11	54.00	-14.89	AVG
7	5388.000	52.10	0.00	52.10	74.00	-21.90	peak
8	5388.000	39.28	0.00	39.28	54.00	-14.72	AVG
9	5436.000	51.76	0.09	51.85	74.00	-22.15	peak
10	5460.000	50.73	0.14	50.87	74.00	-23.13	peak
11	5470.000	50.68	0.16	50.84	68.20	-17.36	peak
12	5524.800	99.21	0.28	99.49	--	--	peak
13	5725.000	50.69	0.82	51.51	68.20	-16.69	peak
14	5924.000	52.90	1.37	54.27	68.20	-13.93	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

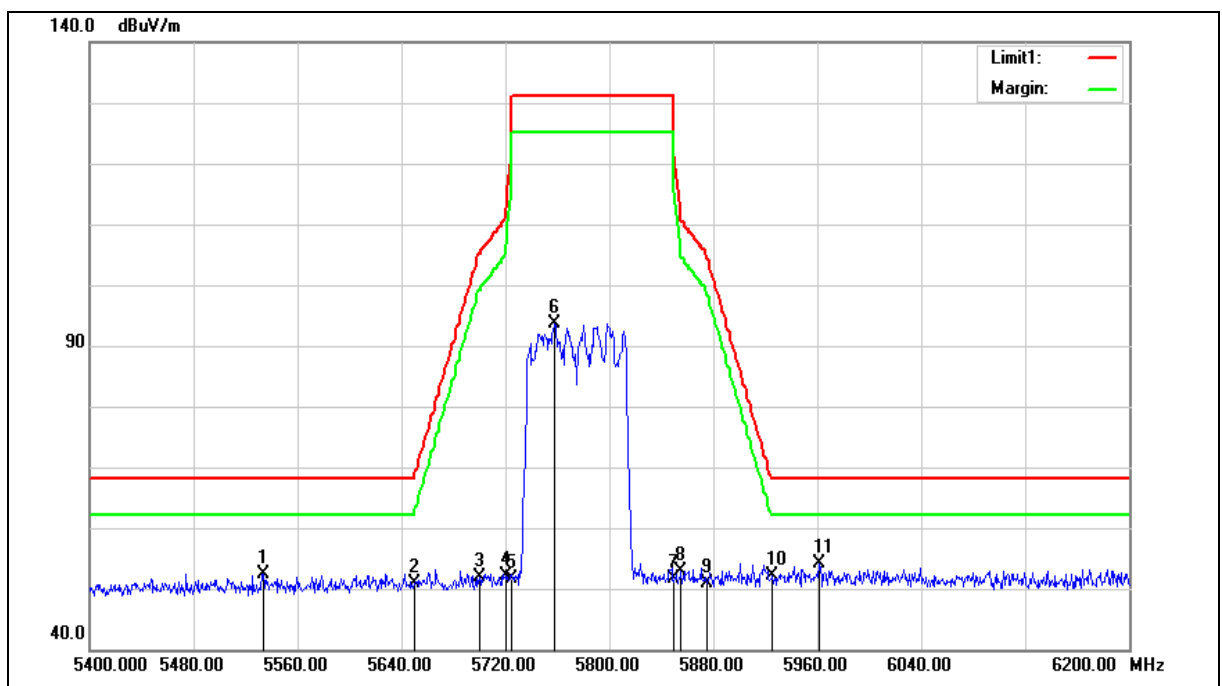

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5533.600	52.20	0.30	52.50	68.20	-15.70	peak
2	5650.000	50.26	0.62	50.88	68.20	-17.32	peak
3	5700.000	51.15	0.75	51.90	105.20	-53.30	peak
4	5720.000	51.21	0.81	52.02	110.80	-58.78	peak
5	5725.000	50.90	0.82	51.72	122.20	-70.48	peak
6	5757.600	92.83	0.91	93.74	--	--	peak
7	5850.000	50.50	1.17	51.67	122.20	-70.53	peak
8	5855.000	51.73	1.18	52.91	110.80	-57.89	peak
9	5875.000	49.74	1.23	50.97	105.20	-54.23	peak
10	5925.000	50.67	1.37	52.04	68.20	-16.16	peak
11	5961.600	52.76	1.46	54.22	68.20	-13.98	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

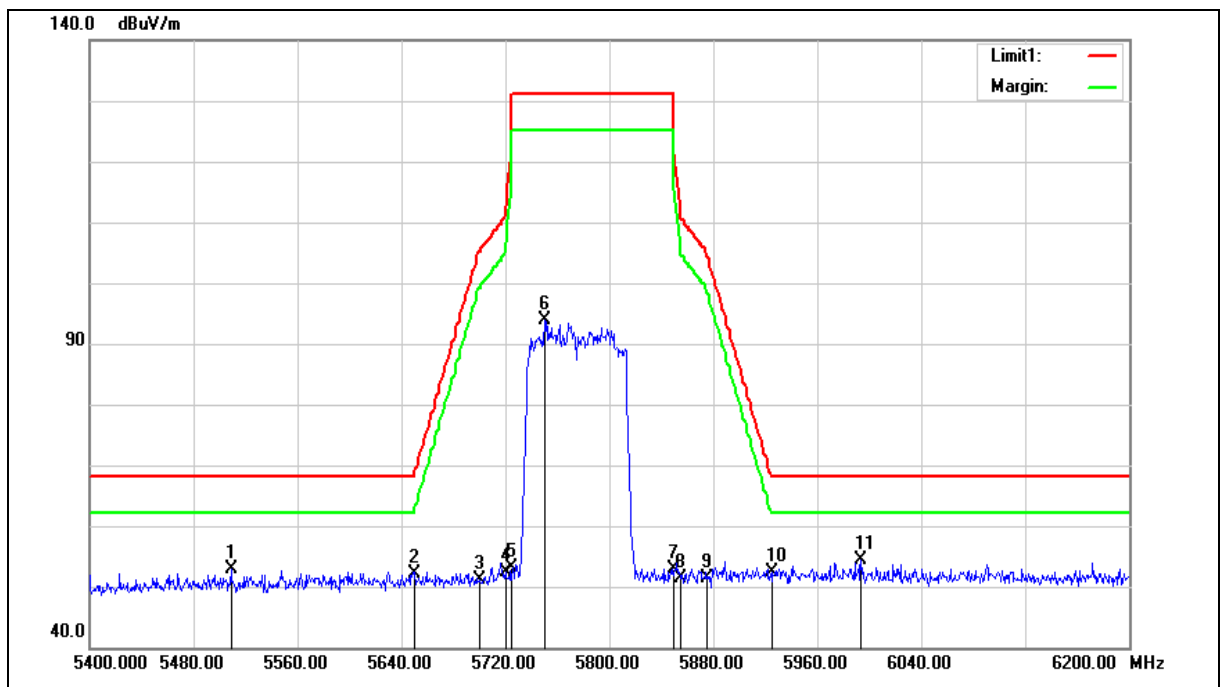

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5508.800	52.54	0.23	52.77	68.20	-15.43	peak
2	5650.000	51.53	0.62	52.15	68.20	-16.05	peak
3	5700.000	50.32	0.75	51.07	105.20	-54.13	peak
4	5720.000	51.51	0.81	52.32	110.80	-58.48	peak
5	5725.000	52.33	0.82	53.15	122.20	-69.05	peak
6	5750.400	93.02	0.90	93.92	--	--	peak
7	5850.000	51.82	1.17	52.99	122.20	-69.21	peak
8	5855.000	50.32	1.18	51.50	110.80	-59.30	peak
9	5875.000	50.20	1.23	51.43	105.20	-53.77	peak
10	5925.000	50.89	1.37	52.26	68.20	-15.94	peak
11	5993.600	52.75	1.56	54.31	68.20	-13.89	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).


2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Display Mode

其它不必要之訊號 (1 GHz 以下)

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

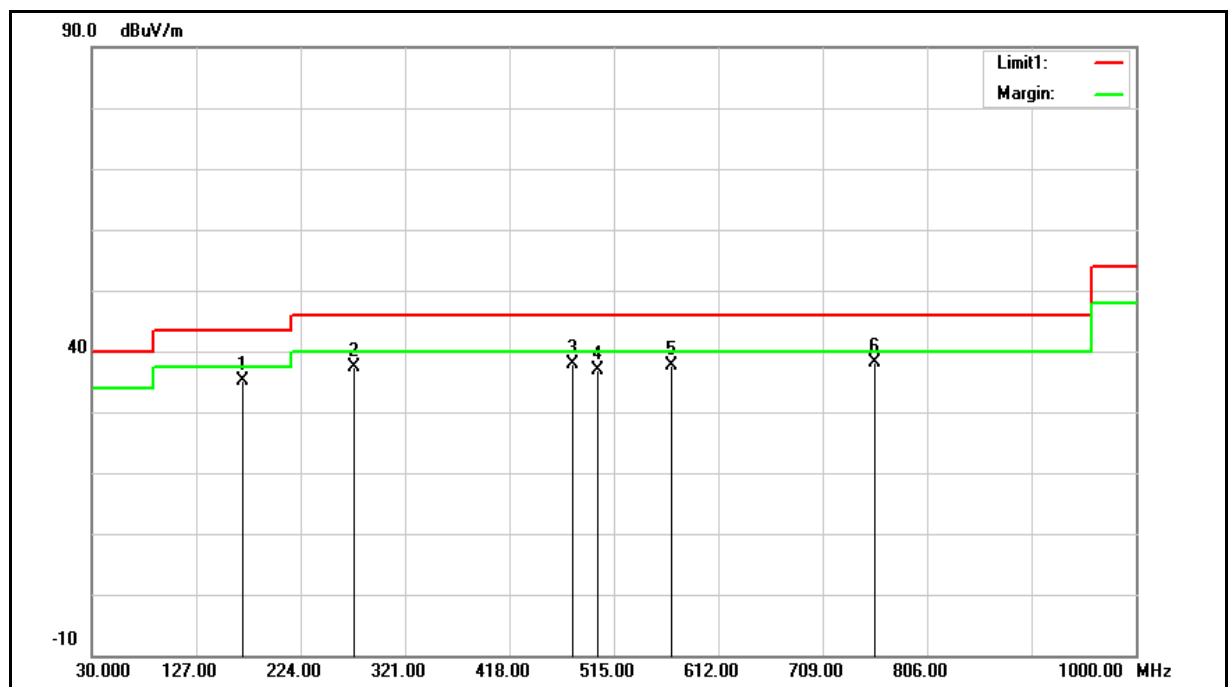

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	170.6500	59.92	-24.68	35.24	43.50	-8.26	QP
2	273.4700	61.71	-24.42	37.29	46.00	-8.71	QP
3	476.2000	57.65	-19.89	37.76	46.00	-8.24	QP
4	500.4500	56.50	-19.64	36.86	46.00	-9.14	QP
5	568.3500	55.65	-17.93	37.72	46.00	-8.28	QP
6	757.5000	53.24	-15.13	38.11	46.00	-7.89	QP


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

Example: 35.24 = -24.68 + 59.92

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

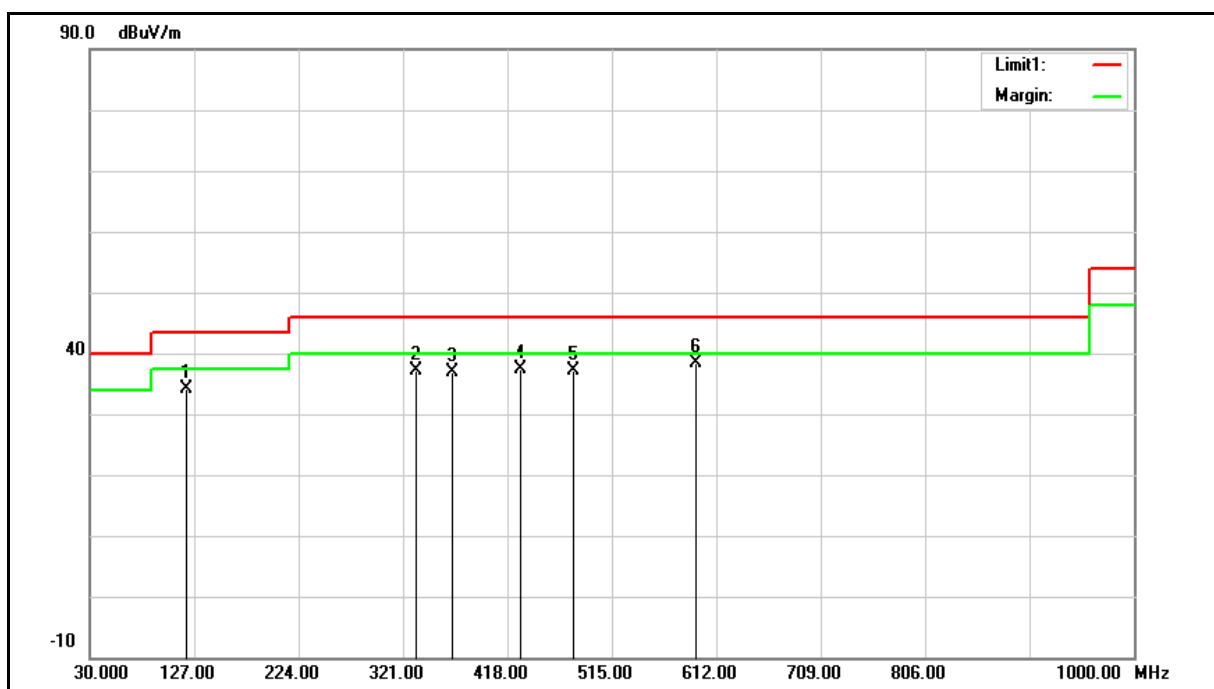

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	120.2100	60.57	-26.53	34.04	43.50	-9.46	QP
2	332.6400	59.94	-22.88	37.06	46.00	-8.94	QP
3	366.5900	58.91	-22.08	36.83	46.00	-9.17	QP
4	429.6400	58.02	-20.65	37.37	46.00	-8.63	QP
5	479.1100	56.96	-19.87	37.09	46.00	-8.91	QP
6	593.5700	55.67	-17.29	38.38	46.00	-7.62	QP

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).


Example: $34.04 = -26.53 + 60.57$

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

場強輻射量測 (1 GHz 以上)

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

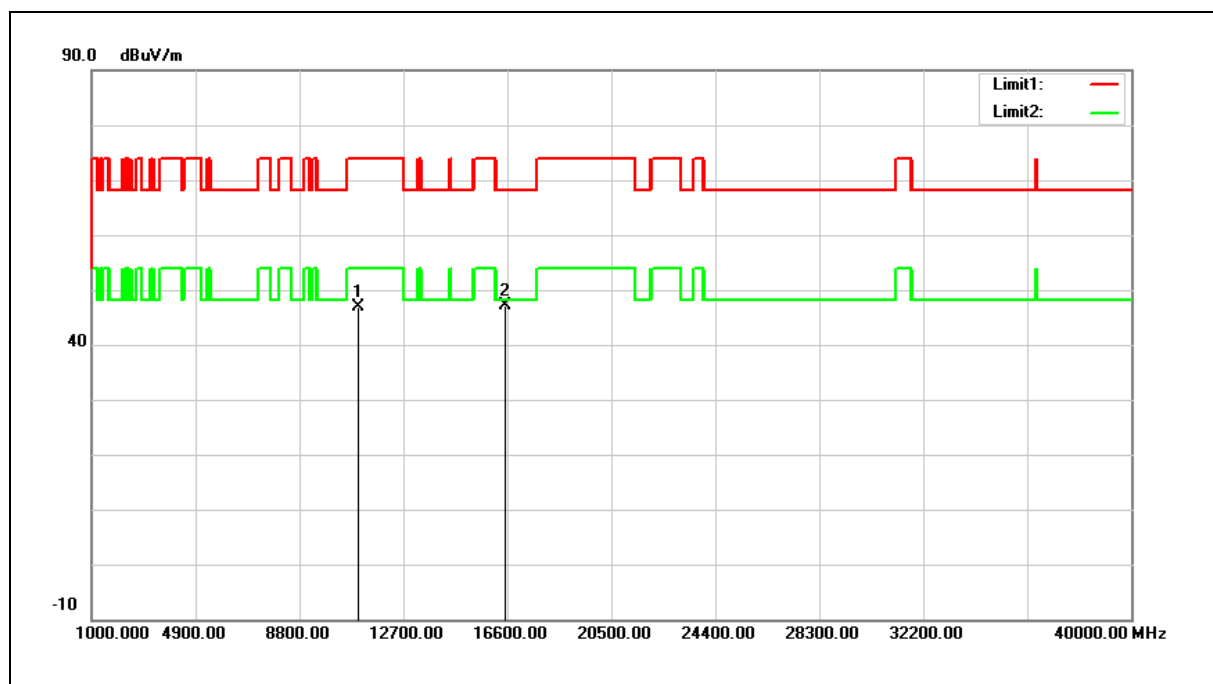

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.43	12.39	46.82	74.00	-27.18	peak
2	16500.000	32.86	14.24	47.10	68.20	-21.10	peak


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

Example: $46.82 = 12.39 + 34.43$

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

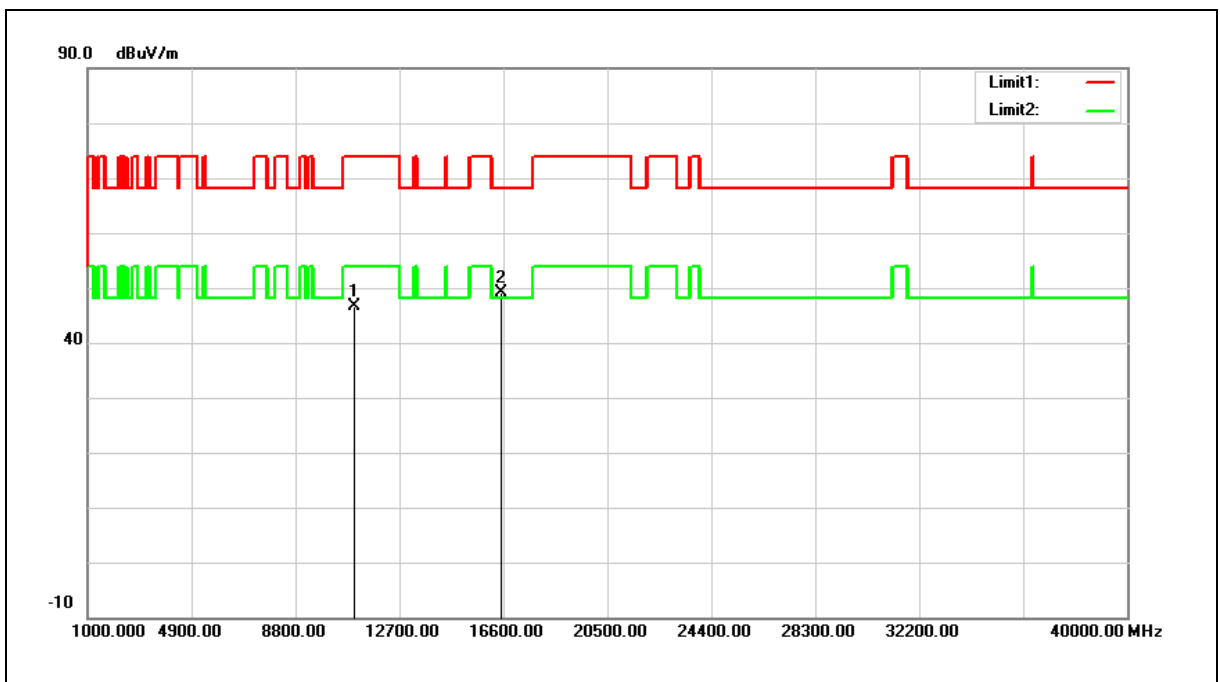

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.15	12.39	46.54	74.00	-27.46	peak
2	16500.000	34.82	14.24	49.06	68.20	-19.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: $46.54 = 12.39 + 34.15$

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Annex E. Conducted Test Results (5 GHz)

Maximum Conducted Output Power

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)							
				ANT-0		ANT-1		ANT-0+1		Limit (dBm)	
				dBm	W	dBm	dBm	W	dBm		
Mode 6	6	36	5180.0	8.69	0.007	8.19	0.007	11.46	0.014	≤	24.00
		40	5200.0	8.32	0.007	8.15	0.007	11.25	0.013	≤	24.00
		44	5220.0	7.97	0.006	8.29	0.007	11.14	0.013	≤	24.00
		48	5240.0	7.98	0.006	8.39	0.007	11.20	0.013	≤	24.00
		52	5260.0	8.01	0.006	8.00	0.006	11.02	0.013	≤	23.76
		56	5280.0	8.11	0.006	7.99	0.006	11.06	0.013	≤	23.76
		60	5300.0	7.80	0.006	7.79	0.006	10.81	0.012	≤	23.76
		64	5320.0	8.52	0.007	8.47	0.007	11.51	0.014	≤	23.76
		100	5500.0	8.49	0.007	8.17	0.007	11.34	0.014	≤	23.73
		104	5520.0	8.19	0.007	8.16	0.007	11.19	0.013	≤	23.73
		108	5540.0	8.38	0.007	8.13	0.007	11.27	0.013	≤	23.73
		112	5560.0	8.49	0.007	8.18	0.007	11.35	0.014	≤	23.73
		116	5580.0	8.15	0.007	8.09	0.006	11.13	0.013	≤	23.73
		132	5660.0	8.14	0.007	8.08	0.006	11.12	0.013	≤	23.73
		136	5680.0	8.10	0.006	8.09	0.006	11.11	0.013	≤	23.73
		140	5700.0	8.64	0.007	8.15	0.007	11.41	0.014	≤	23.73
		149	5745.0	8.47	0.007	8.13	0.007	11.31	0.014	≤	30.00
		153	5765.0	8.13	0.007	8.11	0.006	11.13	0.013	≤	30.00
		157	5785.0	8.65	0.007	8.48	0.007	11.58	0.014	≤	30.00
		161	5805.0	8.09	0.006	8.11	0.006	11.11	0.013	≤	30.00
		165	5825.0	8.27	0.007	8.09	0.006	11.19	0.013	≤	30.00

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)						
				ANT-0		ANT-1		ANT-0+1		Limit (dBm)
				dBm	W	dBm	dBm	W	dBm	
Mode 7	14.4	36	5180.0	8.27	0.007	9.18	0.008	11.76	0.015	≤ 24.00
		40	5200.0	8.33	0.007	8.96	0.008	11.67	0.015	≤ 24.00
		44	5220.0	8.17	0.007	8.86	0.008	11.54	0.014	≤ 24.00
		48	5240.0	8.47	0.007	9.00	0.008	11.75	0.015	≤ 24.00
		52	5260.0	8.39	0.007	8.53	0.007	11.47	0.014	≤ 23.92
		56	5280.0	8.57	0.007	8.51	0.007	11.55	0.014	≤ 23.92
		60	5300.0	8.27	0.007	8.21	0.007	11.25	0.013	≤ 23.92
		64	5320.0	8.37	0.007	8.51	0.007	11.45	0.014	≤ 23.92
		100	5500.0	8.39	0.007	8.39	0.007	11.40	0.014	≤ 23.91
		104	5520.0	8.07	0.006	8.09	0.006	11.09	0.013	≤ 23.91
		108	5540.0	8.09	0.006	8.08	0.006	11.10	0.013	≤ 23.91
		112	5560.0	8.44	0.007	8.26	0.007	11.36	0.014	≤ 23.91
		116	5580.0	8.27	0.007	8.19	0.007	11.24	0.013	≤ 23.91
		132	5660.0	8.12	0.006	8.13	0.007	11.14	0.013	≤ 23.91
		136	5680.0	8.14	0.007	8.15	0.007	11.16	0.013	≤ 23.91
		140	5700.0	8.36	0.007	8.30	0.007	11.34	0.014	≤ 23.91
		149	5745.0	8.56	0.007	8.42	0.007	11.50	0.014	≤ 30.00
		153	5765.0	8.14	0.007	8.13	0.007	11.15	0.013	≤ 30.00
		157	5785.0	8.24	0.007	8.32	0.007	11.29	0.013	≤ 30.00
		161	5805.0	8.24	0.007	8.24	0.007	11.25	0.013	≤ 30.00
		165	5825.0	8.33	0.007	8.38	0.007	11.37	0.014	≤ 30.00
Mode 8	30	38	5190.0	8.47	0.007	8.35	0.007	11.42	0.014	≤ 24.00
		46	5230.0	8.37	0.007	8.49	0.007	11.44	0.014	≤ 24.00
		54	5270.0	8.17	0.007	8.32	0.007	11.26	0.013	≤ 24.00
		62	5310.0	8.28	0.007	8.50	0.007	11.40	0.014	≤ 24.00
		102	5510.0	5.90	0.004	5.96	0.004	8.94	0.008	≤ 24.00
		110	5550.0	8.06	0.006	8.38	0.007	11.23	0.013	≤ 24.00
		134	5670.0	8.35	0.007	8.04	0.006	11.21	0.013	≤ 24.00
		151	5755.0	8.57	0.007	8.49	0.007	11.54	0.014	≤ 30.00
		159	5795.0	8.26	0.007	7.92	0.006	11.10	0.013	≤ 30.00

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)						
				ANT-0		ANT-1		ANT-0+1		Limit (dBm)
				dBm	W	dBm	dBm	W	dBm	
Mode 9	14.4	36	5180.0	8.34	0.007	9.32	0.009	11.87	0.015	≤ 24.00
		40	5200.0	8.35	0.007	8.97	0.008	11.68	0.015	≤ 24.00
		44	5220.0	8.33	0.007	8.94	0.008	11.66	0.015	≤ 24.00
		48	5240.0	8.55	0.007	9.09	0.008	11.84	0.015	≤ 24.00
		52	5260.0	8.47	0.007	8.65	0.007	11.57	0.014	≤ 23.98
		56	5280.0	8.59	0.007	8.61	0.007	11.61	0.014	≤ 23.98
		60	5300.0	8.38	0.007	8.33	0.007	11.37	0.014	≤ 23.98
		64	5320.0	8.47	0.007	8.55	0.007	11.52	0.014	≤ 23.98
		100	5500.0	8.51	0.007	8.51	0.007	11.52	0.014	≤ 23.94
		104	5520.0	8.49	0.007	8.11	0.006	11.31	0.014	≤ 23.94
		108	5540.0	8.45	0.007	8.12	0.006	11.30	0.013	≤ 23.94
		112	5560.0	8.51	0.007	8.15	0.007	11.34	0.014	≤ 23.94
		116	5580.0	8.38	0.007	8.09	0.006	11.25	0.013	≤ 23.94
		132	5660.0	8.41	0.007	8.08	0.006	11.26	0.013	≤ 23.94
		136	5680.0	8.44	0.007	8.07	0.006	11.27	0.013	≤ 23.94
		140	5700.0	8.45	0.007	8.39	0.007	11.43	0.014	≤ 23.94
		149	5745.0	8.67	0.007	8.47	0.007	11.58	0.014	≤ 30.00
		153	5765.0	8.21	0.007	8.24	0.007	11.24	0.013	≤ 30.00
		157	5785.0	8.24	0.007	8.38	0.007	11.32	0.014	≤ 30.00
		161	5805.0	8.19	0.007	8.31	0.007	11.26	0.013	≤ 30.00
		165	5825.0	8.34	0.007	8.45	0.007	11.41	0.014	≤ 30.00
Mode 10	30	38	5190.0	8.59	0.007	8.38	0.007	11.50	0.014	≤ 24.00
		46	5230.0	8.42	0.007	8.57	0.007	11.51	0.014	≤ 24.00
		54	5270.0	8.29	0.007	8.35	0.007	11.33	0.014	≤ 24.00
		62	5310.0	8.35	0.007	8.59	0.007	11.48	0.014	≤ 24.00
		102	5510.0	6.03	0.004	6.05	0.004	9.05	0.008	≤ 24.00
		110	5550.0	8.09	0.006	8.49	0.007	11.30	0.014	≤ 24.00
		134	5670.0	8.41	0.007	8.05	0.006	11.24	0.013	≤ 24.00
		151	5755.0	8.64	0.007	8.51	0.007	11.59	0.014	≤ 30.00
		159	5795.0	8.38	0.007	8.01	0.006	11.21	0.013	≤ 30.00
Mode 11	65	42	5210.0	7.45	0.006	7.05	0.005	10.26	0.011	≤ 24.00
		58	5290.0	8.59	0.007	8.29	0.007	11.45	0.014	≤ 24.00
		106	5530.0	6.74	0.005	6.71	0.005	9.74	0.009	≤ 24.00
		155	5775.0	8.62	0.007	8.41	0.007	11.53	0.014	≤ 30.00

Maximum Power Spectral Density

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 6	36	5180.0	-5.001	0.349	-4.652	11
	40	5200.0	-5.222	0.349	-4.873	11
	48	5240.0	-4.043	0.349	-3.694	11
	52	5260.0	-5.151	0.349	-4.802	11
	56	5280.0	-4.733	0.349	-4.384	11
	64	5320.0	-5.869	0.349	-5.520	11
	100	5500.0	-5.613	0.349	-5.264	11
	112	5560.0	-3.696	0.349	-3.347	11
	140	5700.0	-4.690	0.349	-4.341	11
Mode 9	36	5180.0	-4.997	0.357	-4.640	11
	40	5200.0	-5.530	0.357	-5.173	11
	48	5240.0	-5.687	0.357	-5.330	11
	52	5260.0	-5.362	0.357	-5.005	11
	56	5280.0	-5.014	0.357	-4.657	11
	64	5320.0	-5.716	0.357	-5.359	11
	100	5500.0	-6.265	0.357	-5.908	11
	112	5560.0	-4.333	0.357	-3.976	11
	140	5700.0	-4.565	0.357	-4.208	11
Mode 10	38	5190.0	-8.092	0.724	-7.368	11
	46	5230.0	-8.227	0.724	-7.503	11
	54	5270.0	-8.454	0.724	-7.730	11
	62	5310.0	-8.263	0.724	-7.539	11
	102	5510.0	-11.253	0.724	-10.529	11
	110	5550.0	-8.466	0.724	-7.742	11
	134	5670.0	-7.648	0.724	-6.924	11
Mode 11	42	5210.0	-12.454	1.388	-11.066	11
	58	5290.0	-10.736	1.388	-9.348	11
	106	5530.0	-13.104	1.388	-11.716	11

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 6	149	5745.0	-13.917	0.349	-6.578	30
	157	5785.0	-14.161	0.349	-6.822	30
	165	5825.0	-14.616	0.349	-7.277	30
Mode 9	149	5745.0	-13.354	0.357	-6.008	30
	157	5785.0	-12.881	0.357	-5.535	30
	165	5825.0	-13.901	0.357	-6.555	30
Mode 10	151	5755.0	-15.457	0.724	-7.743	30
	159	5795.0	-16.112	0.724	-8.398	30
Mode 11	155	5775.0	-19.195	1.388	-10.817	30

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ration = 10*Log(500 kHz/100 kHz)

ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 6	36	5180.0	-4.941	0.349	-4.592	11
	40	5200.0	-5.207	0.349	-4.858	11
	48	5240.0	-3.522	0.349	-3.173	11
	52	5260.0	-4.687	0.349	-4.338	11
	56	5280.0	-5.159	0.349	-4.810	11
	64	5320.0	-5.323	0.349	-4.974	11
	100	5500.0	-5.260	0.349	-4.911	11
	112	5560.0	-3.314	0.349	-2.965	11
	140	5700.0	-4.231	0.349	-3.882	11
Mode 9	36	5180.0	-4.010	0.357	-3.653	11
	40	5200.0	-4.990	0.357	-4.633	11
	48	5240.0	-5.170	0.357	-4.813	11
	52	5260.0	-5.162	0.357	-4.805	11
	56	5280.0	-5.385	0.357	-5.028	11
	64	5320.0	-5.418	0.357	-5.061	11
	100	5500.0	-6.286	0.357	-5.929	11
	112	5560.0	-4.298	0.357	-3.941	11
	140	5700.0	-4.716	0.357	-4.359	11
Mode 10	38	5190.0	-8.149	0.724	-7.425	11
	46	5230.0	-8.346	0.724	-7.622	11
	54	5270.0	-8.833	0.724	-8.109	11
	62	5310.0	-8.502	0.724	-7.778	11
	102	5510.0	-11.184	0.724	-10.460	11
	110	5550.0	-8.126	0.724	-7.402	11
	134	5670.0	-8.220	0.724	-7.496	11
Mode 11	42	5210.0	-12.515	1.388	-11.127	11
	58	5290.0	-11.036	1.388	-9.648	11
	106	5530.0	-13.206	1.388	-11.818	11

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 6	149	5745.0	-14.248	0.349	-6.909	30
	157	5785.0	-14.069	0.349	-6.730	30
	165	5825.0	-14.165	0.349	-6.826	30
Mode 9	149	5745.0	-13.023	0.357	-5.677	30
	157	5785.0	-12.733	0.357	-5.387	30
	165	5825.0	-13.654	0.357	-6.308	30
Mode 10	151	5755.0	-15.841	0.724	-8.127	30
	159	5795.0	-16.027	0.724	-8.313	30
Mode 11	155	5775.0	-18.975	1.388	-10.597	30

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ration = 10*Log(500 kHz/100 kHz)

ANT-0+1				
操作模式	頻道 (CH)	頻率 (MHz)	計算值(dBm/MHz)	限制值 (dBm/MHz)
Mode 6	36	5180.0	-1.612	11
	40	5200.0	-1.855	11
	48	5240.0	-0.416	11
	52	5260.0	-1.554	11
	56	5280.0	-1.582	11
	64	5320.0	-2.228	11
	100	5500.0	-2.074	11
	112	5560.0	-0.142	11
	140	5700.0	-1.095	11
Mode 9	36	5180.0	-1.109	11
	40	5200.0	-1.885	11
	48	5240.0	-2.054	11
	52	5260.0	-1.894	11
	56	5280.0	-1.829	11
	64	5320.0	-2.197	11
	100	5500.0	-2.908	11
	112	5560.0	-0.948	11
	140	5700.0	-1.273	11
Mode 10	38	5190.0	-4.386	11
	46	5230.0	-4.552	11
	54	5270.0	-4.905	11
	62	5310.0	-4.647	11
	102	5510.0	-7.484	11
	110	5550.0	-4.558	11
	134	5670.0	-4.190	11
Mode 11	42	5210.0	-8.086	11
	58	5290.0	-6.485	11
	106	5530.0	-8.757	11

ANT-0+1				
操作模式	頻道 (CH)	頻率 (MHz)	計算值(dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 6	149	5745.0	-3.731	30
	157	5785.0	-3.766	30
	165	5825.0	-4.036	30
Mode 9	149	5745.0	-2.829	30
	157	5785.0	-2.450	30
	165	5825.0	-3.419	30
Mode 10	151	5755.0	-4.921	30
	159	5795.0	-5.345	30
Mode 11	155	5775.0	-7.696	30

