



晶復科技股份有限公司

A Test Lab Techno Corp.

低功率射頻器材試驗報告

報告編號 2104DR22

版本(Rev.) 01

產品名稱 HUAWEI MateBook D 14

申請廠商 訊嵐技術有限公司

廠牌 HUAWEI

型式 (號) NbB-WAH9P

產品試驗依據之標準 低功率射頻器材技術規範(LP0002) 109 年 7 月 1 日

報告發行日期 110 年 04 月 20 日

填發本型式認可報告之試驗機構 (認可代號)

晶復科技股份有限公司
33465 桃園市八德區長安街 140-1 號
Tel : 03-2710188 / Fax : 03-2710190



財團法人全國認證基金會
認證編號 : 1330
認證有效期間 : 108.09.06 ~ 111.09.05
認可能量範圍 : 低功率射頻器材技術規範(LP0002) (頻率範圍:9 kHz to 40 GHz)

免責聲明

- 1.本測試報告所敘述之測試結果，僅對顧客所提供之測試樣品，在此測試報告所述及之測試條件下，所實施之量測有效。
- 2.本測試報告未經晶復科技股份有限公司書面同意，不得部分複製本報告內容。
- 3.本測試報告內容之相關資訊皆由顧客提供，針對顧客所提供資訊之正確性、適當性或完整性，若有疑義或錯誤，並因此影響本測試報告結果有效性時，本實驗室不負其相關責任。

報告修訂紀錄

版本 (Rev.)	發行日期	修訂內容	修訂者
00	110 年 04 月 15 日	初版發行	趙翊如
01	110 年 04 月 20 日	更新 2.5 章節(P.18) 刪除 Annex E (P.240~241、P.337~340) 新增 Annex E (P.370)	趙翊如

低功率射頻器材測試證明書

產品名稱：HUAWEI MateBook D 14

廠牌：HUAWEI

型號：NbB-WAH9P

申請廠商：訊歲技術有限公司

申請者地址：臺北市內湖區洲子街55、57號3樓

製造廠商：Huawei Technologies Co., Ltd.

製造商地址：Huawei Industrial Base, Bantian, Longgang, Shenzhen 518129, People's Republic of China

待測物電壓：輸入：DC 20 V, 3.25 A
輸出：DC 5 V, 2 A

量測規範：低功率射頻器材技術規範(LP0002) 109年7月1日

試驗實驗室：晶復科技股份有限公司(桃園市八德區長安街140-1號)


樣品接受日期：110 年 03 月 25 日

試驗日期：110 年 03 月 27 日~110 年 03 月 29 日

報告中所描述之測試結果與待測設備之架構組合，均根據實際量測情況作詳實的記錄。
由測試結果顯示，上述待測設備樣機確實已符合低功率射頻器材技術規範(LP0002)所規定的各項限制值。

特此證明！

審核者：



(楊 凱 宇)

目 錄

名 稱	頁 次
低功率射頻器材測試證明書.....	3
1. 一般敘述	5
1.1 待測設備一般敘述.....	5
1.2 其他相關聲明.....	7
2. 量測儀器及測試配置說明	8
2.1 量測設備	8
2.2 檢驗系統示意圖	9
2.3 輔助測試之週邊設備描述.....	11
2.4 測試軟體版本.....	14
2.5 測試模式	14
2.6 量測不確定度.....	25
2.7 試驗環境.....	25
3. 測試項目與結果判定總表	26
4. 測試項目表列	28
4.1 電源線傳導干擾之量測.....	28
4.2 2.4 GHz 檢驗項目	29
4.2.1 場強輻射之量測	29
4.2.2 最大傳導輸出功率之量測	32
4.2.3 天線規格之要求	32
4.2.4 非必要頻帶之量測.....	33
4.2.5 6 dB 頻寬之要求	33
4.2.6 峰值發射電功率密度之要求.....	34
4.2.7 電波暴露量之評估.....	35
4.3 5 GHz U-NII 檢驗項目	36
4.3.1 場強輻射與非必要頻帶之量測	36
4.3.2 最大傳導輸出功率之量測	39
4.3.3 最大傳導功率頻譜密度之要求	41
4.3.4 26 dB 頻寬之要求	43
4.3.5 6 dB 頻寬之要求	43
4.3.6 發射功率控制(TPC)之量測	44
4.3.7 動態頻率選擇(DFS)之量測	45
4.3.8 頻道可用性檢查時間之量測.....	46
4.3.9 頻道移動時間之量測	47
4.3.10 不可佔用時間之量測	48
4.3.11 天線規格之要求	49
4.3.12 電波暴露量之評估	49
5. Test Results.....	50
Annex A. Conducted Emission	50
Annex B. Radiated Emission Measurement (2.4 GHz)	54
Annex C. Conducted Test Results (2.4 GHz).....	129
Annex D. Radiated Emission Measurement (5 GHz).....	162
Annex E. Conducted Test Results (5 GHz)	339

1. 一般敘述

1.1 待測設備一般敘述

本敘述僅針對產品簡單說明之，其他詳細之規格請參考使用說明書。

產 品 名 稱	HUAWEI MateBook D 14	
廠 牌	HUAWEI	
型 號	NbB-WAH9P	
額 定 電 源	輸入：DC 20 V, 3.25 A 輸出：DC 5 V, 2 A	
待測物電源類別	Form Power Adapter / Battery	
調 變 方 式	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n 2.4 GHz 20 MHz / 40 MHz: OFDM IEEE 802.11a U-NII Band: OFDM IEEE 802.11n 5 GHz 20 MHz / 40 MHz U-NII Band: OFDM IEEE 802.11ac 20 MHz / 40 MHz / 80 MHz / 160 MHz U-NII Band: OFDM *此產品之不具有動態選擇(DFS)之雷達偵測功能 (Client without radar detection function)	
頻 率 使 用 範 圍	Mode	Frequency Range (MHz)
	IEEE 802.11b / IEEE 802.11g / IEEE 802.11n 2.4 GHz 20 MHz	2412 – 2462
	IEEE 802.11n 2.4 GHz 40 MHz	2422 – 2452
	IEEE 802.11a / IEEE 802.11n 5 GHz 20 MHz U-NII Band I IEEE 802.11ac 20 MHz U-NII Band I	5180 – 5240
	IEEE 802.11a / IEEE 802.11n 5 GHz 20 MHz U-NII Band II-A IEEE 802.11ac 20 MHz U-NII Band II-A	5260 – 5320
	IEEE 802.11a / IEEE 802.11n 5 GHz 20 MHz U-NII Band II-C IEEE 802.11ac 20 MHz U-NII Band II-C	5500 – 5700
	IEEE 802.11a / IEEE 802.11n 5 GHz 20 MHz U-NII Band III IEEE 802.11ac 20 MHz U-NII Band III	5745 – 5825
	IEEE 802.11n 5 GHz 40 MHz U-NII Band I IEEE 802.11ac 40 MHz U-NII Band I	5190 – 5230
	IEEE 802.11n 5 GHz 40 MHz U-NII Band II-A IEEE 802.11ac 40 MHz U-NII Band II-A	5270 – 5310
	IEEE 802.11n 5 GHz 40 MHz U-NII Band II-C IEEE 802.11ac 40 MHz U-NII Band II-C	5510 – 5670
	IEEE 802.11n 5 GHz 40 MHz U-NII Band III IEEE 802.11ac 40 MHz U-NII Band III	5755 – 5795
	IEEE 802.11ac 80 MHz U-NII Band I	5210
	IEEE 802.11ac 80 MHz U-NII Band II-A	5290
	IEEE 802.11ac 80 MHz U-NII Band II-C	5530
	IEEE 802.11ac 80 MHz U-NII Band III	5775
	IEEE 802.11ac 160 MHz U-NII Band I & Band II-A	5250

天 線 資 訊	Antenna	廠牌	型號	型態	增益值(dBi)	
					2.4 GHz	5 GHz
天 線 資 訊	ANT-0 / ANT-1	INPAQ	WA-P-LBLB-04-065	PIFA Antenna	1	1
	ANT-0 / ANT-1	WNC	81EABC15.G01	PIFA Antenna	1	1
	Directional Gain				4.01	4.01
RF 最大輸出功率	Mode			Power		
	IEEE 802.11b			15.22 dBm	0.033 W	
	IEEE 802.11g			15.11 dBm	0.032 W	
	IEEE 802.11n 2.4 GHz 20 MHz			15.11 dBm	0.032 W	
	IEEE 802.11n 2.4 GHz 40 MHz			15.27 dBm	0.034 W	
	IEEE 802.11a U-NII Band I			12.14 dBm	0.016 W	
	IEEE 802.11a U-NII Band II-A			12.29 dBm	0.017 W	
	IEEE 802.11a U-NII Band II-C			12.14 dBm	0.016 W	
	IEEE 802.11a U-NII Band III			12.12 dBm	0.016 W	
	IEEE 802.11n 5 GHz 20 MHz U-NII Band I			12.29 dBm	0.017 W	
	IEEE 802.11n 5 GHz 20 MHz U-NII Band II-A			12.21 dBm	0.017 W	
	IEEE 802.11n 5 GHz 20 MHz U-NII Band II-C			12.28 dBm	0.017 W	
	IEEE 802.11n 5 GHz 20 MHz U-NII Band III			12.04 dBm	0.016 W	
	IEEE 802.11n 5 GHz 40 MHz U-NII Band I			12.06 dBm	0.016 W	
	IEEE 802.11n 5 GHz 40 MHz U-NII Band II-A			12.00 dBm	0.016 W	
	IEEE 802.11n 5 GHz 40 MHz U-NII Band II-C			12.01 dBm	0.016 W	
	IEEE 802.11n 5 GHz 40 MHz U-NII Band III			11.99 dBm	0.016 W	
	IEEE 802.11ac 20 MHz U-NII Band I			12.44 dBm	0.018 W	
	IEEE 802.11ac 20 MHz U-NII Band II-A			12.38 dBm	0.017 W	
	IEEE 802.11ac 20 MHz U-NII Band II-C			12.40 dBm	0.017 W	
	IEEE 802.11ac 20 MHz U-NII Band III			12.17 dBm	0.016 W	
	IEEE 802.11ac 40 MHz U-NII Band I			12.22 dBm	0.017 W	
	IEEE 802.11ac 40 MHz U-NII Band II-A			12.16 dBm	0.016 W	
	IEEE 802.11ac 40 MHz U-NII Band II-C			12.16 dBm	0.016 W	
	IEEE 802.11ac 40 MHz U-NII Band III			12.09 dBm	0.016 W	
	IEEE 802.11ac 80 MHz U-NII Band I			10.14 dBm	0.010 W	
	IEEE 802.11ac 80 MHz U-NII Band II-A			10.21 dBm	0.010 W	
	IEEE 802.11ac 80 MHz U-NII Band II-C			10.06 dBm	0.010 W	
	IEEE 802.11ac 80 MHz U-NII Band III			12.23 dBm	0.017 W	
	IEEE 802.11ac 160 MHz U-NII Band I			7.27 dBm	0.005 W	
	IEEE 802.11ac 160 MHz U-NII Band II-A			7.07 dBm	0.005 W	

輸出/輸入埠說明：

輸 出 / 入 埠		數量	介面內容說明
1	USB Type-C Port	1	連接至電源供應器/多媒體終端
2	HDMI Port	1	連接至 Monitor
3	USB Port	2	連接至 HDD/Mouse
4	Audio Port	1	連接至多媒體終端

附屬裝置表：

裝置名稱	廠牌	型號	備註
內建固定式電池	HUAWEI	HB4692Z9ECW-22A	7.64 VDC, 7330 mAh 製造商(1)：Shenzhen Sunwoda Intelligence Technology Co., Ltd. 製造商(2)：Huizhou Desay Battery Co., Ltd. *僅製造商不同
電源供應器	HUAWEI	HW-200325UP0	INPUT : 100-240 VAC, 50/60 Hz, 1.8 A OUTPUT : DC 5 V, 2 A OR DC 9 V, 2 A OR DC 12 V, 2 A OR DC 15 V, 3 A OR DC 20.0 V, 3.25 A
USB Cable	HUAWEI	04071375	Type-C → Type-C Shielded, 1.75 m

1.2 其他相關聲明

本測試報告屬(以下選擇一種打■)

☒	申請新的型式檢驗認可的測試。
☐	已取得型式檢驗認可之商品,因設計變更而重新測試。 登錄號碼: XXXXXXXX

2. 量測儀器及測試配置說明

2.1 量測設備

For Conducted

Test Period: Mar. 27 ~ Mar. 28, 2021

測試者: 林佳禾, 呂迪曄

名 稱	廠 牌	型 號	序 號	本次校驗日期	校驗年限
Power Sensor	Agilent	N1921A	MY45241957	12/09/2020	1 year
Power Meter	Agilent	N1911A	MY45101619	12/09/2020	1 year
Spectrum Analyzer (20 Hz~26.5 GHz)	Agilent	N9020A	US47520902	09/24/2020	1 year

For Conducted Emission

Test Period: Mar. 27, 2021

測試者: 申世傑

名 稱	廠 牌	型 號	序 號	本次校驗日期	校驗年限
測試接收機 (9 kHz~3 GHz)	R&S	ESCI	100367	05/25/2020	1 year
線性阻抗模擬網路	R&S	ENV216	101041	04/06/2020	1 year

For Radiated Emissions


Test Period: Mar. 26 ~ Mar. 29, 2021

測試者: 周瑞鴻, 李怡華, 葉佳原, 李亭衛, 吳展寬


名 稱	廠 牌	型 號	序 號	本次校驗日期	校驗年限
Spectrum Analyzer	KEYSIGHT	N9030B	MY57143537	04/14/2020	1 year
Amplifier	Agilent	8447D	2944A11119	01/15/2021	1 year
Amplifier	Titan	T0912E01263025 A1F	002	07/23/2020	1 year
Preamplifier	EMCI	EMC2654045	980028	08/24/2020	1 year
天線	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	01146	07/03/2020	1 year
天線(1~18 GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	02207	06/30/2020	1 year
天線(18~40 GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	08/18/2020	1 year

2.2 檢驗系統示意圖

電源傳導干擾測試配置

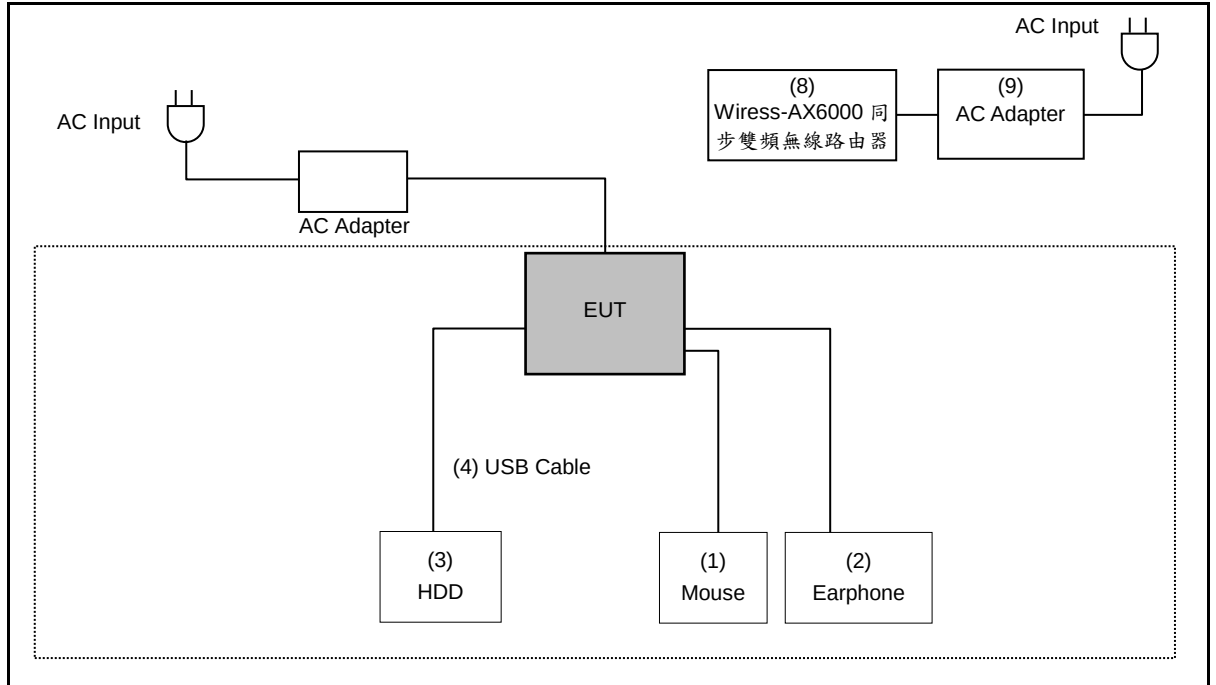


輻射干擾測試配置

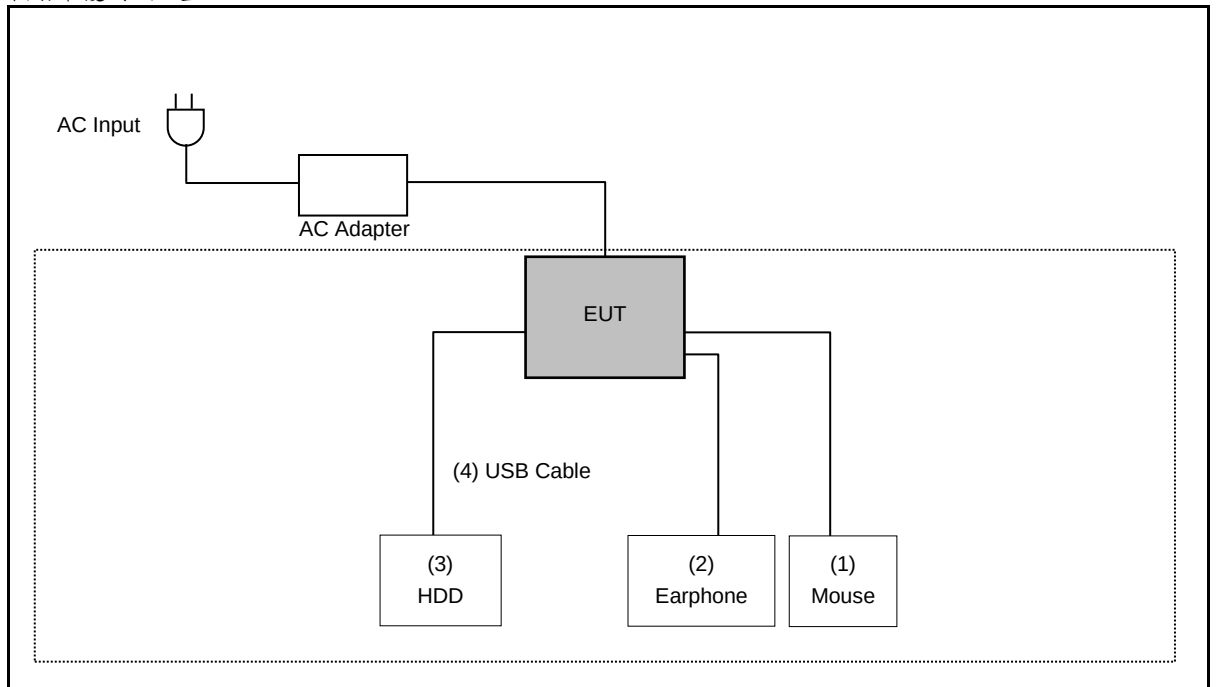


With HDMI

電源傳導干擾測試配置

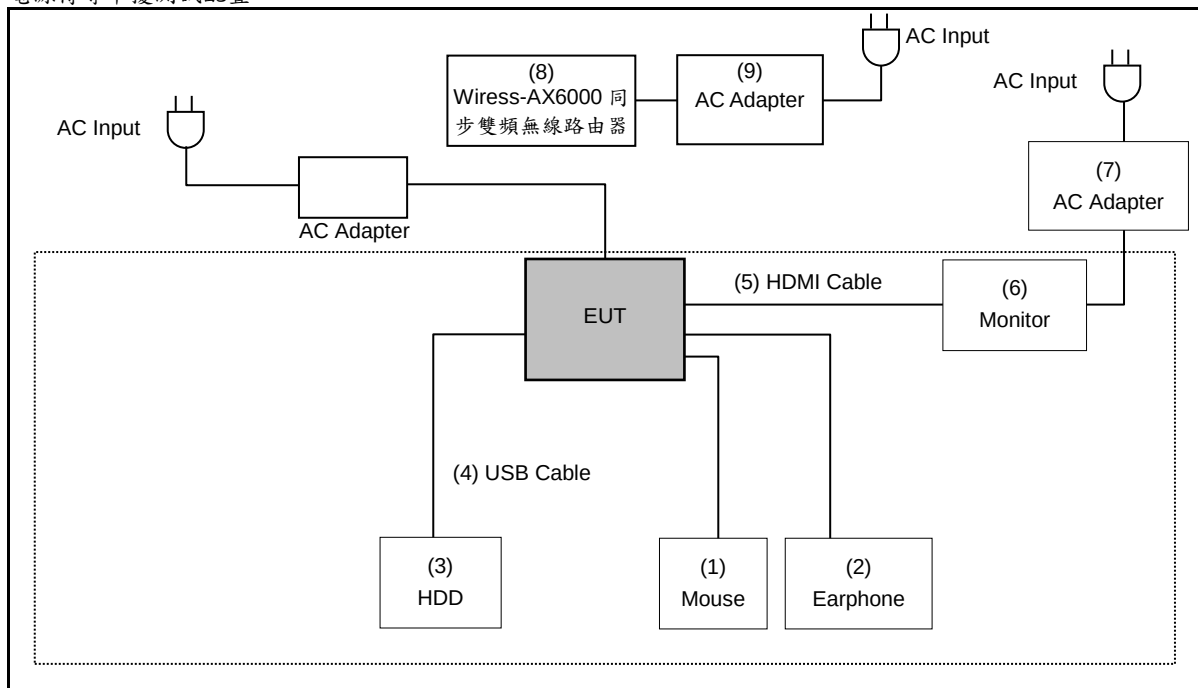

輻射干擾測試配置

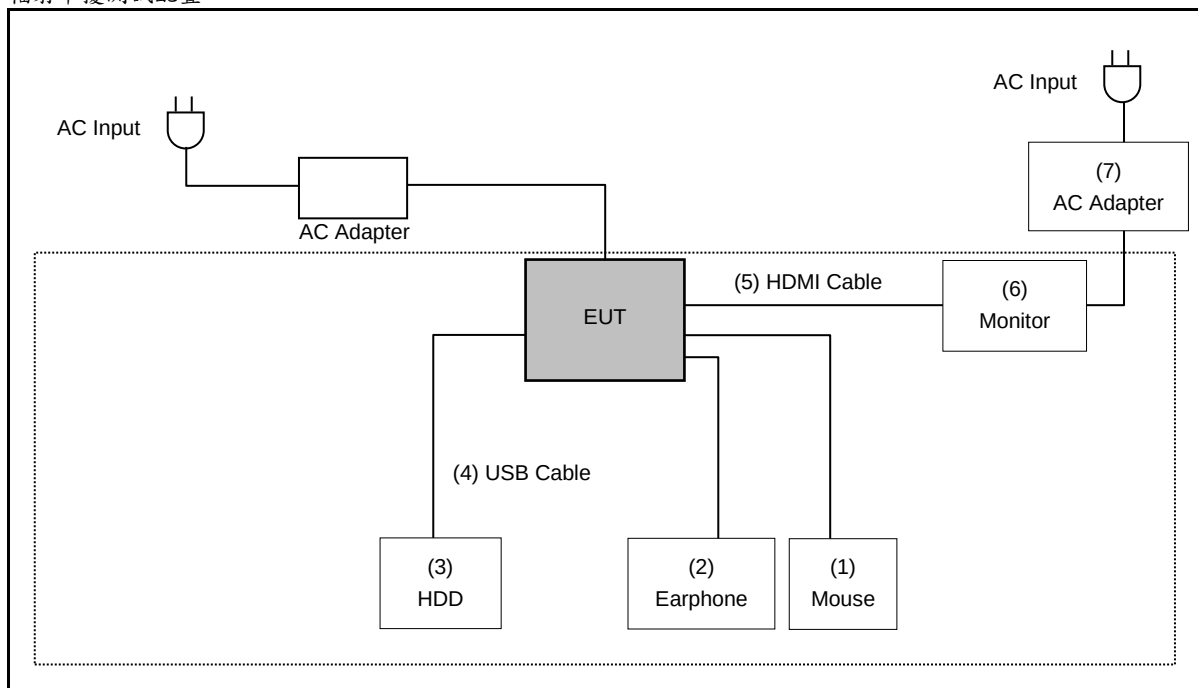

2.3 輔助測試之週邊設備描述

下列輔助設備或配件為測試中所使用，以形成一個代表性的受測系統。

週邊名稱		廠 牌	型 號	序 號	電源線	備 註
(1)	Mouse	KINYO	M-02	---	---	(實驗室提供)
(2)	Earphone	HUAWEI	22040296	---	---	長度：1.1 m (實驗室提供)
(3)	HDD	Transend	TS1TSJ25A3K	E47225-0 078	---	(實驗室提供)
(4)	USB Cable	Transend	TS1TSJ25A3K	---	---	規格：STD-A to Micro-B 長度：0.4 m (實驗室提供)
(5)	HDMI Cable	Avier	K48GHS	---	---	規格：HDMI to HDMI 長度：1.7 m (實驗室提供)
(6)	Monitor	ViewSonic	VS16024	---	---	(實驗室提供)
(7)	AC Adapter	AOC	ADPC2065	---	---	INPUT：AC 100-240 V, 50/60 Hz, 1.5 A OUTPUT：DC 20 V, 3.25 A (實驗室提供)
(8)	Wiress-AX6000 同 步雙頻無線路由器	ASUS	RT-AX88U	---	---	NCC ID：CCAF18LP1530T1 (實驗室提供)
(9)	AC Adapter	ASUS	ADP-45BW B	---	Non-Shielded, 1.7 m	INPUT：AC 100-240 V, 50/60 Hz, 1.2 A OUTPUT：DC 19 V, 2.37 A (實驗室提供)
(10)	手持式行動電話機	HUAWEI	ELS-NX9	---	---	NCC 證號: CCAK204G0170T4 (申請者提供)

註：本案經申請者切結器材不提供隨貨配件，配件由實驗室(或申請者)提供併同檢驗。

測試組合：

EUT Configure Mode	CE	RE<1 GHz	RE $\geq$ 1 GHz	備註	
未開啟相機模式	V	V	V		
開啟相機模式					
內建固定式電池	V	V	V	製造商(1)	
內建固定式電池			---	製造商(2)	
電源供應器	V	V	V		
USB Cable	V	V	V		
Mouse	V	V	V	測試週邊(1)	
Earphone	V	V	V	測試週邊(2)	
HD	V	V	V	測試週邊(3)	
USB cable	V	V	V	測試週邊(4)	
HDMI Cable	---	---	---	測試週邊(5)	
Monitor	---	---	---	測試週邊(6)	
AC Adapter	---	---	---	測試週邊(7)	
Wiress-AX6000 同步雙頻 無線路由器	V		X	測試週邊(8)	Normal Link
AC Adapter	V		X	測試週邊(9)	Normal Link
手持式行動電話機	X		---	測試週邊(10)	Charge

RE $\geq$ 1 GHz : Radiated Emission above 1 GHz & Bandedge Measurement

RE<1 GHz : Radiated Emission below 1 GHz

CE : Conducted Emission

V : Final mode

X : Non support

--- : No evaluation required

Blank Space : Pre-test mode

With HDMI

測試組合：

EUT Configure Mode	CE	RE<1 GHz	RE $\geq$ 1 GHz	備註	
未開啟相機模式	V	V	V		
開啟相機模式					
內建固定式電池	V	V	V	製造商(1)	
內建固定式電池			---	製造商(2)	
電源供應器	V	V	V		
USB Cable	V	V	V		
Mouse	V	V	V	測試週邊(1)	
Earphone	V	V	V	測試週邊(2)	
HD	V	V	V	測試週邊(3)	
USB cable	V	V	V	測試週邊(4)	
HDMI Cable	V	V	V	測試週邊(5)	
Monitor	V	V	V	測試週邊(6)	
AC Adapter	V	V	V	測試週邊(7)	
Wiress-AX6000 同步雙頻 無線路由器	V		X	測試週邊(8)	Normal Link
AC Adapter	V		X	測試週邊(9)	Normal Link
手持式行動電話機	X		---	測試週邊(10)	Charge

RE $\geq$ 1 GHz : Radiated Emission above 1 GHz & Bandedge Measurement

RE<1 GHz : Radiated Emission below 1 GHz

CE : Conducted Emission

V : Final mode

X : Non support

--- : No evaluation required

Blank Space : Pre-test mode

2.4 測試軟體版本

Measurement Software			
No.	Description	Software	Version
1	Conducted Emission	EZ EMC	1.1.4.3
2	Radiated Emission	EZ EMC	1.1.4.4

2.5 測試模式

使用定頻模式量測

Pre-Test Mode
Mode 1: Transmit Mode
Mode 2: IEEE 802.11b Continuous TX Mode
Mode 3: IEEE 802.11g Continuous TX Mode
Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode
Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode
Mode 6: IEEE 802.11a Continuous TX Mode
Mode 7: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode
Mode 8: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode
Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode
Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode
Mode 11: IEEE 802.11ac 80 MHz Continuous TX Mode
Mode 12: IEEE 802.11ac 160 MHz Continuous TX Mode
Mode 13: Receiver Mode

Final-Test Mode
Mode 1: Transmit Mode
Mode 2: IEEE 802.11b Continuous TX Mode
Mode 3: IEEE 802.11g Continuous TX Mode
Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode
Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode
Mode 6: IEEE 802.11a Continuous TX Mode
Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode
Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode
Mode 11: IEEE 802.11ac 80 MHz Continuous TX Mode
Mode 12: IEEE 802.11ac 160 MHz Continuous TX Mode
Mode 13: Receiver Mode

Note 1: ANT-1 is the worst case in Mode 2, Mode 3.

ANT-0 is the worst case in Mode 6.

Note 2: Investigation has been done on all the possible configurations for searching the worst cases (VHT20/VHT40 covers HT20/HT40). The table is a list of the test modes show in this test report.

Test Mode	Frequency (MHz)	RF Power setting in Test Software		Test Software Version
		ANT-0	ANT-1	
Mode 2	2412	11.8	11.8	DTRU
	2437	14.8	14.8	
	2462	11.8	11.8	
Mode 3	2412	11.8	11.8	
	2437	14.8	14.8	
	2462	11.8	11.8	
Mode 4	2412	9.0	9.0	
	2437	12.0	12.0	
	2462	9.0	9.0	
Mode 5	2422	7.0	7.0	
	2437	12.0	12.0	
	2452	7.0	7.0	

Test Mode	Frequency (MHz)	RF power setting in Test Software		Test Software Version
		ANT-0	ANT-1	
Mode 6	5180.0	11	11	DRTU
	5200.0	11	11	
	5220.0	11	11	
	5240.0	11	11	
	5260.0	11	11	
	5280.0	11	11	
	5300.0	11	11	
	5320.0	11.75	11.75	
	5500.0	11.75	11.75	
	5520.0	11.75	11.75	
	5540.0	11.75	11.75	
	5560.0	11.75	11.75	
	5580.0	11.75	11.75	
	5660.0	11.75	11.75	
	5680.0	11.75	11.75	
	5700.0	11.25	11.25	
	5745.0	11.25	11.25	
	5765.0	11.25	11.25	
	5785.0	11.25	11.25	
	5805.0	11.25	11.25	
	5825.0	11.25	11.25	

Test Mode	Frequency (MHz)	RF power setting in Test Software		Test Software Version
		ANT-0	ANT-1	
Mode 7	5180.0	8.5	8.5	DRTU
	5200.0	8.5	8.5	
	5220.0	8.5	8.5	
	5240.0	8.5	8.5	
	5260.0	8.5	8.5	
	5280.0	8.5	8.5	
	5300.0	8.5	8.5	
	5320.0	9	9	
	5500.0	9	9	
	5520.0	9	9	
	5540.0	9	9	
	5560.0	9	9	
	5580.0	9	9	
	5660.0	9	9	
	5680.0	9	9	
	5700.0	8.5	8.5	
	5745.0	8.5	8.5	
	5765.0	8.5	8.5	
	5785.0	8.5	8.5	
	5805.0	8.5	8.5	
	5825.0	8.5	8.5	
Mode 8	5190.0	6.5	6.5	DRTU
	5230.0	8.5	8.5	
	5270.0	8.5	8.5	
	5310.0	6.5	6.5	
	5510.0	6.5	6.5	
	5550.0	9	9	
	5670.0	8.5	8.5	
	5755.0	8.5	8.5	
	5795.0	8.5	8.5	

Test Mode	Frequency (MHz)	RF power setting in Test Software		Test Software Version
		ANT-0	ANT-1	
Mode 9	5180.0	8.5	8.5	DRTU
	5200.0	8.5	8.5	
	5220.0	8.5	8.5	
	5240.0	8.5	8.5	
	5260.0	8.5	8.5	
	5280.0	8.5	8.5	
	5300.0	8.5	8.5	
	5320.0	9	9	
	5500.0	9	9	
	5520.0	9	9	
	5540.0	9	9	
	5560.0	9	9	
	5580.0	9	9	
	5660.0	9	9	
	5680.0	9	9	
	5700.0	8.5	8.5	
	5745.0	8.5	8.5	
	5765.0	8.5	8.5	
	5785.0	8.5	8.5	
	5805.0	8.5	8.5	
	5825.0	8.5	8.5	
Mode 10	5190.0	6.5	6.5	DRTU
	5230.0	8.5	8.5	
	5270.0	8.5	8.5	
	5310.0	6.5	6.5	
	5510.0	6.5	6.5	
	5550.0	9	9	
	5670.0	8.5	8.5	
	5755.0	8.5	8.5	
	5795.0	8.5	8.5	
Mode 11	5210.0	7	7	DRTU
	5290.0	7	7	
	5530.0	7	7	
	5775.0	9	9	
Mode 12	5250.0	6.5	6.5	DRTU
	5250.0	6.5	6.5	

Test Mode	ANT-0	ANT-1	ANT-0+1
Mode 2	---	V	---
Mode 3	---	V	---
Mode 4	V	V	V
Mode 5	V	V	V
Mode 6	---	V	---
Mode 7	V	V	V
Mode 8	V	V	V
Mode 9	V	V	V
Mode 10	V	V	V
Mode 11	V	V	V
Mode 12	V	V	V


Test Mode	Antenna Delivery	Data Rate (Mbps)	Test Channel
Mode 2	1TX / 1RX(Diversity)	1	1, 6, 11
Mode 3	1TX / 1RX(Diversity)	6	1, 6, 11
Mode 4	2TX / 2RX (MIMO)	13	1, 6, 11
Mode 5	2TX / 2RX (MIMO)	27	3, 6, 9
Mode 6	1TX / 1RX(Diversity)	6	36, 40, 48, 52, 56, 64, 100, 112, 140, 149, 157, 165
Mode 7	2TX / 2RX (MIMO)	13	36, 40, 48, 52, 56, 64, 100, 112, 140, 149, 157, 165
Mode 8	2TX / 2RX (MIMO)	27	38, 46, 54, 62, 102, 110, 134, 151, 159
Mode 9	2TX / 2RX (MIMO)	13	36, 40, 48, 52, 56, 64, 100, 112, 140, 149, 157, 165
Mode 10	2TX / 2RX (MIMO)	27	38, 46, 54, 62, 102, 110, 134, 151, 159
Mode 11	2TX / 2RX (MIMO)	58.5	42, 58, 106, 155
Mode 12	2TX / 2RX (MIMO)	117	50

Duty cycle

Test Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
Mode 2	2412.0	1.920	1.950	0.985	0.067	0.010
Mode 3	2412.0	2.060	2.090	0.986	0.063	0.010
Mode 4	2412.0	0.984	1.020	0.965	0.156	1.016
Mode 5	2422.0	0.504	0.534	0.944	0.251	1.984
Mode 6	5180.0	2.072	2.094	0.989	0.046	0.010
Mode 9	5180.0	0.984	1.023	0.962	0.169	1.016
Mode 10	5190.0	0.501	0.541	0.926	0.333	1.994
Mode 11	5210.0	0.260	0.302	0.861	0.650	3.846
Mode 12	5250.0	0.154	0.195	0.791	1.018	6.477


Mode 2: IEEE 802.11b Continuous TX Mode

On+off time

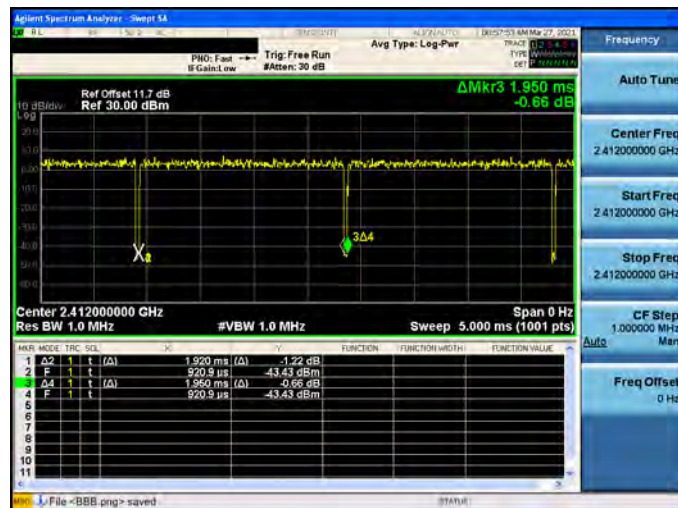


Mode 3: IEEE 802.11g Continuous TX Mode

On+off time

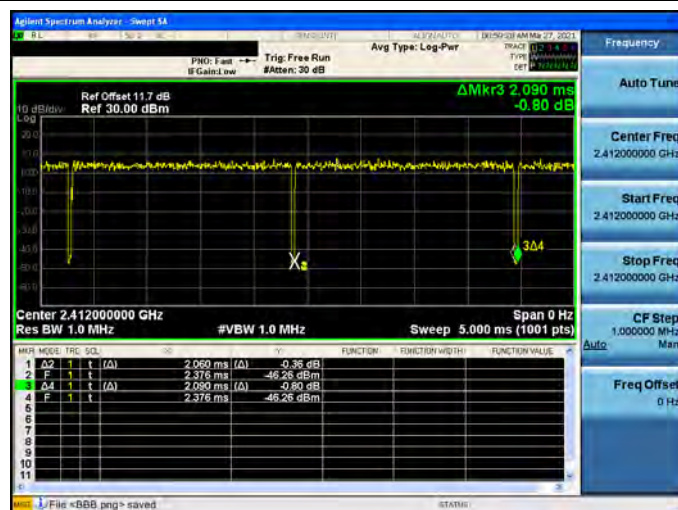


Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode

On+off time

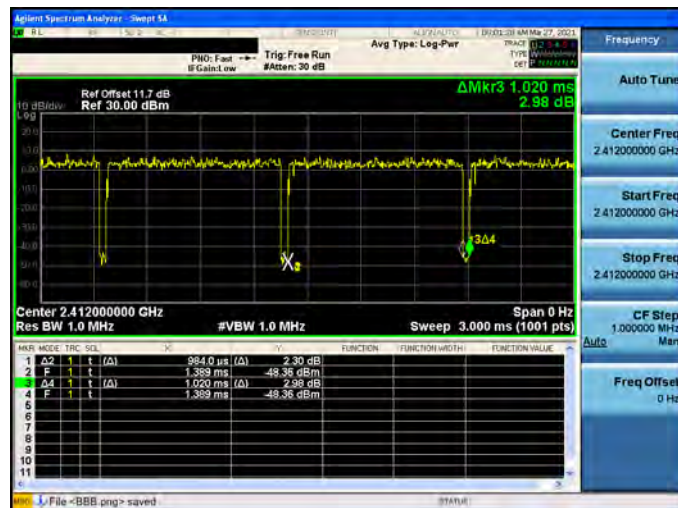


Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode

On+off time

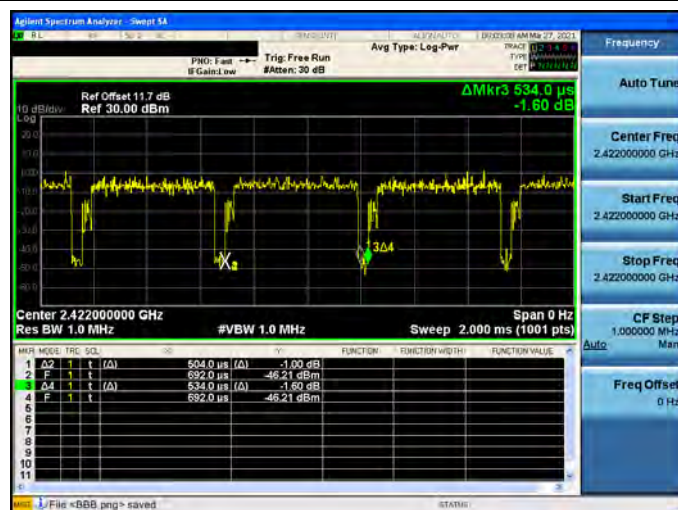


Mode 6: IEEE 802.11a Continuous TX Mode

On+off time

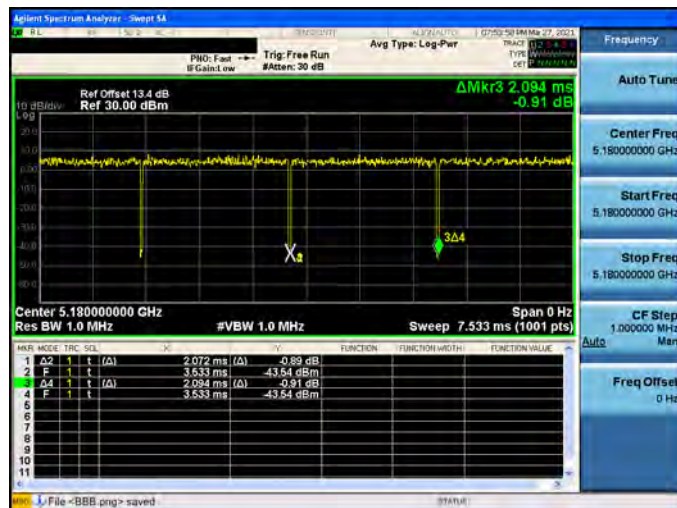


Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode

On+off time

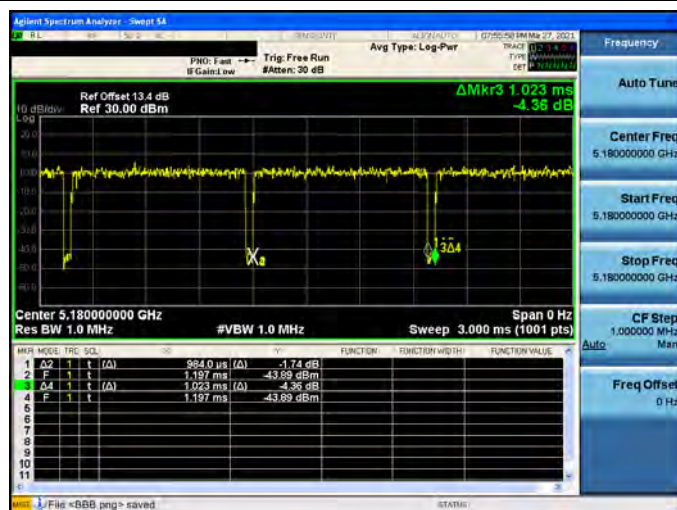

Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode


On+off time

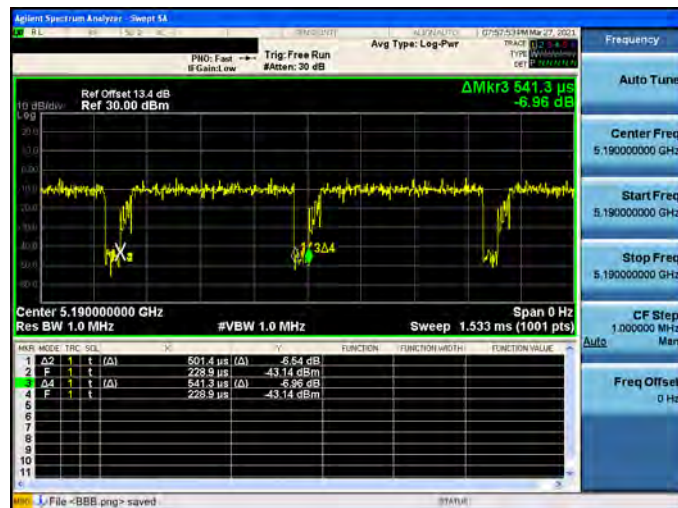

Mode 11: IEEE 802.11ac 80 MHz Continuous TX Mode

On+off time



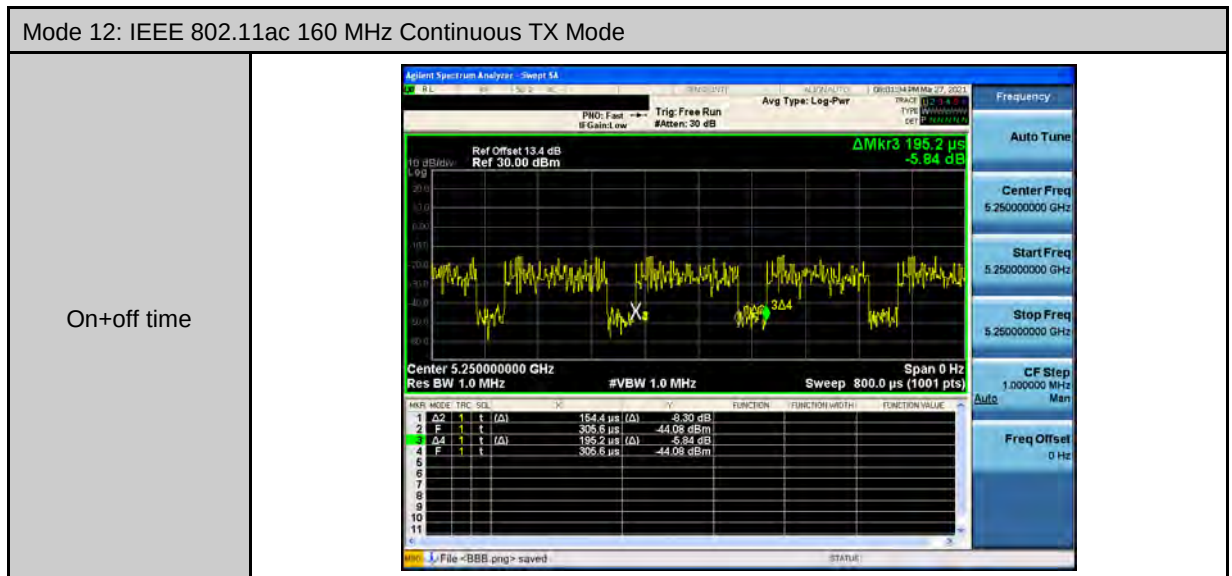

2.6 量測不確定度

下列量測不確定水準是參照量測儀器 CISPR 16-4-2 所規定之不確定度。

Test Item	Frequency Range	Uncertainty
Conducted Emission	150 kHz ~ 30 MHz	2.7 dB
Radiated Emission	9 kHz ~ 30 MHz	2.2 dB
	30 MHz ~ 1000 MHz	5.1 dB
	1000 MHz ~ 18000 MHz	5.1 dB
	18000 MHz ~ 26500 MHz	4.4 dB
	26500 MHz ~ 40000 MHz	4.6 dB
Conducted Output Power		1.1 dB
RF Bandwidth		4.7 %
Power Spectral Density		1.1 dB
Frequency Stability		1.3×10^{-7}
Duty Cycle		1.1 %
Time Occupancy		1.5 %

2.7 試驗環境

產品測試時之實驗室環境條件如下：

項 目	測 試 項 目	需 求	實 際
溫度 Temperature (°C)	LP0002	10 - 40	20 - 30
濕度 Humidity (%RH)		10 - 90	45 - 75

3. 測試項目與結果判定總表

本測試報告之所有項目皆依據 NCC 低功率射頻器材技術規範(LP0002)之檢驗法。

2.4 GHz 頻段適用下列表格

項次	測試項目	適用規範	測試結果	量測設備	結果判定
1	電源線傳導干擾	低功率射頻器材技術規範 3.3 節	Annex A.	請參閱 2.1 節	符合
2	場強輻射	低功率射頻器材技術規範 3.5 節、3.6 節、4.10.1.5 節	Annex B.	請參閱 2.1 節	符合
3	頻帶邊緣外之輻射發射	低功率射頻器材技術規範 4.10.1.5 節	Annex B.	請參閱 2.1 節	符合
4	最大傳導輸出功率	低功率射頻器材技術規範 4.10.1.2(1)(C)節	Annex C.	請參閱 2.1 節	符合
5	天線規格	低功率射頻器材技術規範 4.10.1.3(3)、4.10.1.4 節	請參閱 4.2.3 節	---	符合
6	非必要頻帶	低功率射頻器材技術規範 4.10.1.5(1)節	Annex C.	請參閱 2.1 節	符合
7	6 dB 頻寬	低功率射頻器材技術規範 4.10.1.6(2)(A)節	Annex C.	請參閱 2.1 節	符合
8	峰值發射電功率密度	低功率射頻器材技術規範 4.10.1.6(2)(B)節	Annex C.	請參閱 2.1 節	符合
9	電波暴露量之評估	低功率射頻器材技術規範 6.20.2 節	Annex E.	請參閱 2.1 節	符合

5 GHz U-NII 頻段適用下列表格

項次	測試項目	適用規範	測試結果	量測設備	結果判定
1	電源線傳導干擾	低功率射頻器材技術規範 3.3 節	Annex A.	請參閱 2.1 節	符合
2	場強輻射	低功率射頻器材技術規範 3.5 節、3.6 節	Annex D.	請參閱 2.1 節	符合
3	頻帶邊緣外之輻射發射	低功率射頻器材技術規範 3.6 節、5.7.4 節	Annex D.	請參閱 2.1 節	符合
4	非必要頻帶	低功率射頻器材技術規範 5.7.4 節	Annex E.	請參閱 2.1 節	符合
5	最大傳導輸出功率	低功率射頻器材技術規範 5.7.3 節	Annex E.	請參閱 2.1 節	符合
6	最大傳導功率頻譜密度	低功率射頻器材技術規範 5.7.3 節	Annex E.	請參閱 2.1 節	符合
7	26 dB 頻寬之要求	N/A	Annex E.	請參閱 2.1 節	----
8	6 dB 頻寬之要求	低功率射頻器材技術規範 5.7.5 節	Annex E.	請參閱 2.1 節	符合
9	發射功率控制(TPC)	低功率射頻器材技術規範 5.7.7.1 節	Annex E.	請參閱 2.1 節	符合
10	動態頻率選擇(DFS) 雷達偵測功能	低功率射頻器材技術規範 5.7.7.2 節	Annex E.	請參閱 2.1 節	不適用
11	動態頻率選擇(DFS) 頻道可用性檢查時間	低功率射頻器材技術規範 5.7.7.2(3)節	Annex E.	請參閱 2.1 節	不適用
12	動態頻率選擇(DFS) 頻道移動時間	低功率射頻器材技術規範 5.7.7.2(4)節	Annex E.	請參閱 2.1 節	符合
13	動態頻率選擇(DFS) 不可佔用時間	低功率射頻器材技術規範 5.7.7.2(5)節	Annex E.	請參閱 2.1 節	符合
14	天線規格	低功率射頻器材技術規範 5.7.8 節	請參閱 4.3.11 節	-----	符合
15	電波暴露量之評估	低功率射頻器材技術規範 6.20.2 節	Annex E.	請參閱 2.1 節	符合

Decision Rule

☒ Uncertainty is not included.

☐ Uncertainty is included.

4. 測試項目表列

4.1 電源線傳導干擾之量測

合格標準：

依據 NCC 低功率射頻器材技術規範(LP0002)之 3.3 節，以市電為電源之低功率射頻器材，其傳導回電源線上頻率自 150 kHz 至 30 MHz 之射頻電壓（在電源端子每一電源線對接地點）不得超過下表所列之限值。測量時應經過 50 Ω /50 μ H 之電源線阻抗模擬網路 (LISN)。頻率重疊處，以較低限值為準。

Frequency (MHz)	傳導限制值 (dBuV)	
	準峰值 (Quasi – peak)	平均值 (Average)
0.15 – 0.5	66 - 56 (註)	56 - 46 (註)
0.5 – 5	56	46
5 - 30	60	50

註：隨頻率之對數遞減。

測試方法：

測試場地為標準傳導測試場地。將待測物置於 0.8 米高的非金屬桌面，使其在工作狀態，待測物電源線接至電源線阻抗穩定網路上，從測試接收機記錄頻率由 0.15 MHz 至 30 MHz 之間之電源線傳導放射強度。


干擾值之計算

電源傳導干擾電壓之計算公式如下

結果值 = 儀器讀值(QP/AV) + 校正因子

其中校正因子為：饋線損失 + 電源阻抗模擬網路損失

測試架構圖：

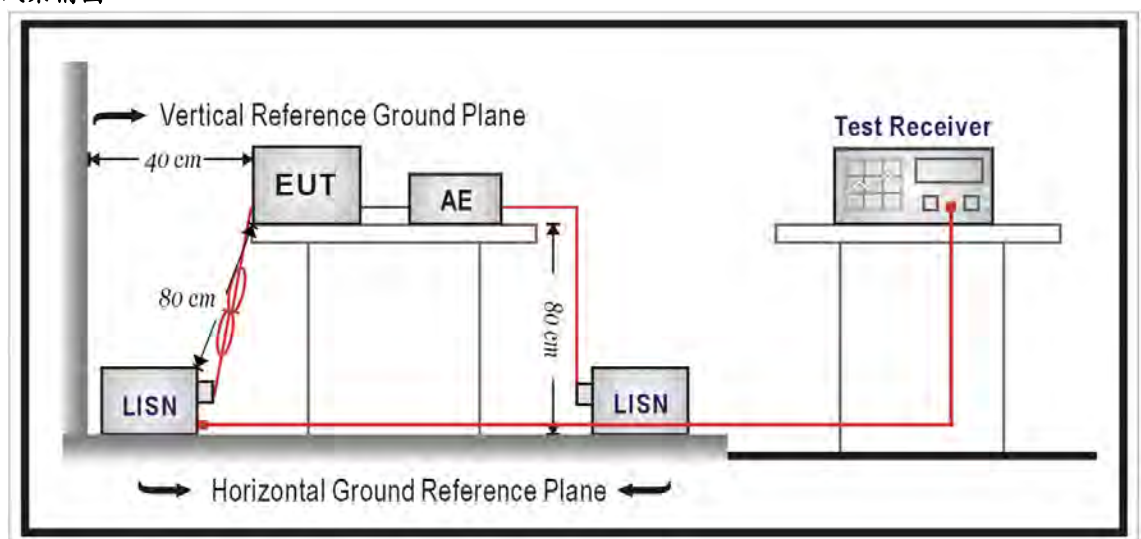

4.2 2.4 GHz 檢驗項目

4.2.1 場強輻射之量測

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之使用頻帶範圍外之任意 100 千赫 (kHz)內，發射機所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之 100 千赫(kHz)內的射頻功率，至少須衰減 20 dB，以射頻傳導或輻射方式測量。如發射機以依據 NCC 低功率射頻器材技術規範(LP0002)之 4.10.1.2(1)(C)之峰值傳導輸出功率量測方式者，至少須衰減 30 dB。此外，落於第 3.5 節禁用頻段之輻射發射，應符合第 3.6 節之規定。

依據 NCC 低功率射頻器材技術規範第 3.5 節之規定,禁用頻段如下：

頻率(MHz)	頻率(MHz)	頻率(MHz)	頻率(MHz)
0.090~0.110	108.00~138.00	1660.0~1785.0	8025.0~8500.0
0.490~0.510	149.90~150.05	1805.0~1888.0	9000.0~9200.0
2.172~2.198	156.70~156.90	1885.0~1900.0	9300.0~9500.0
3.013~3.033	162.01~167.17	1905.0~1985.0	10600~12700
4.115~4.198	167.72~173.20	2010.0~2025.0	13250~13400
5.670~5.690	240.00~285.00	2110.0~2170.0	14470~14500
6.200~6.300	322.00~335.40	2200.0~2300.0	15350~16200
8.230~8.400	399.90~410.00	2310.0~2390.0	17700~21400
12.265~12.600	485.00~510.00	2483.5~2900.0	22010~23120
13.340~13.430	608.00~614.00	3260.0~3267.0	23600~24000
14.965~15.020	703.00~748.00	3332.0~3339.0	31200~31800
16.700~16.755	758.00~803.00	3345.8~3358.0	36430~36500
19.965~20.020	825.00~915.00	3500.0~4400.0	38600 以上
25.500~25.700	930.00~1240.0	4500.0~5250.0	
37.475~38.275	1300.0~1427.0	5350.0~5460.0	
73.500~75.400	1435.0~1626.5	7250.0~7750.0	

依據 NCC 低功率射頻器材技術規範第 3.6 節之規定,除本規範各章節另有放寬規定者外，其電場強度不得超過下表之限值，且其不必要之發射皆不得大於主波發射強度。

頻 率 (MHz)	電場強度 (μ V/m)	測距 (m)
0.009 - 0.490 (含)	2,400 / 頻率 (千赫)	300
0.490 (不含) - 1.705 (含)	24,000 / 頻率 (千赫)	30
1.705 (不含) - 30 (不含)	30	30
30 (含) - 88 (含)	100	3
88 (不含) - 216 (含)	150	3
216 (不含) - 960 (含)	200	3
960 (不含) 以上	500	3

測試方法：

測試場地為開放測試場,將待測物置於 0.8 米高的非金屬桌面，使其在工作狀態，接收天線置於 3 米外相同的高度。待測物分別要垂直或水平放置，而且桌面要 360 度旋轉，另外接收天線也要從 1.0 米至 4.0 米升降變化，以找出最大的輻射電場強度，接收天線置於水平、垂直極向各執行測試一次。


場強度之計算

場強之計算公式為：結果值 = 讀值 + 校正因子


其中校正因子為：天線因子 + 饋線損失 + 濾波器損失（若有使用） - 放大器增益（若有使用）

測試架構圖：

量測頻率低於 1 GHz 以下之測試配置

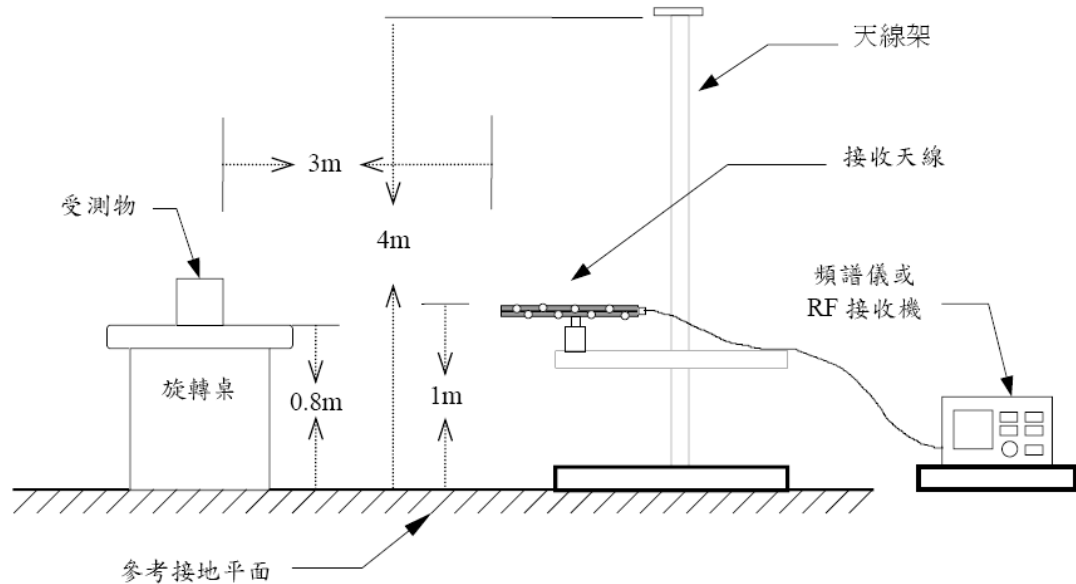

量測頻率高於 1 GHz 以上之測試配置

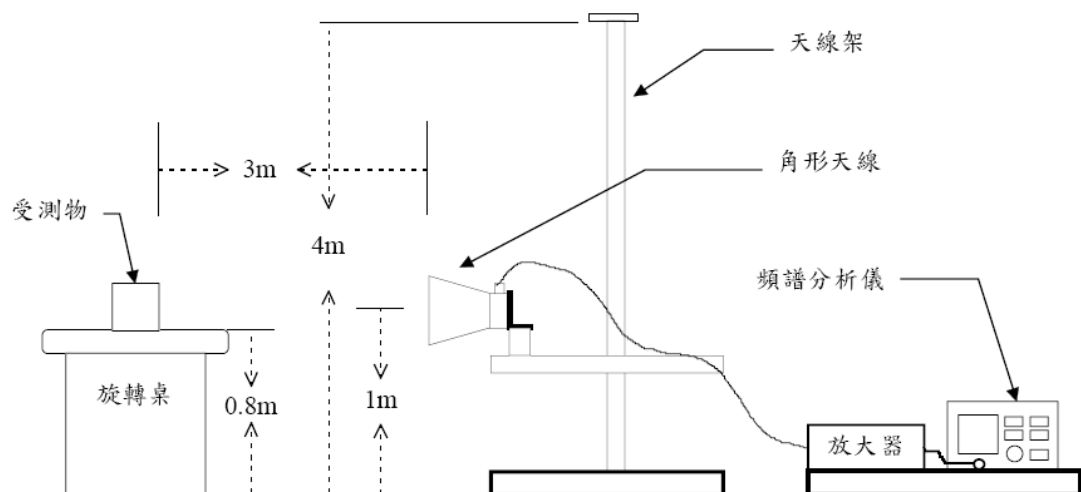


4.2.2 最大傳導輸出功率之量測

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之 4.10.1.2(1)(C)節之要求，操作於 2400-2483.5 兆赫(MHz)數位調變技術系統：1 瓦(W)(含)以下

測試架構圖：

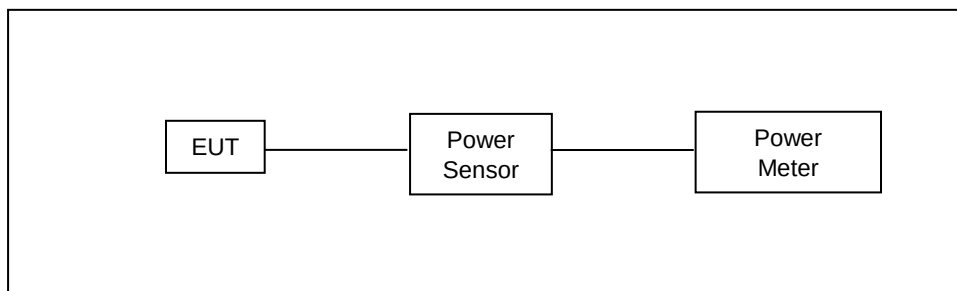

4.2.3 天線規格之要求

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之 4.10.1.3(3)節之要求，除 4.10.1.3(1)及 4.10.1.3(2)外，使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率限制值。

依據 NCC 低功率射頻器材技術規範(LP0002)之 4.10.1.4 節之要求，天線之規格不受第 3.2 節規定之限制


判定結果：符合。

4.2.4 非必要頻帶之量測

合格標準：

發射限制： 使用頻帶範圍外之任意 100 千赫 (kHz)內，發射器所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之 100 千赫 (kHz)內的射頻功率，須衰減 30 分貝(dB)，以射頻傳導或輻射方式測量。

測試架構圖：

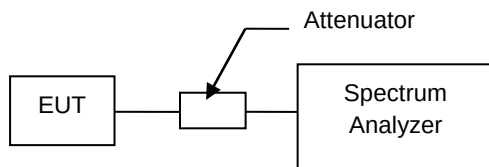

附註 1: 於使用頻帶範圍之任意 100 千赫 (kHz)內，發射器所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之 100 千赫 (kHz)內的射頻功率，衰減 30 分貝(dB)以上，符合規定。


附註 2: 測試結果頻帶外之輻射雜訊皆小於主頻 TX 30 dB。

4.2.5 6 dB頻寬之要求

合格標準：

依據 NCC 低功率射頻器材技術規範 4.10.1.6(2)(A)節之要求，對使用數位調變技術(Digital Modulation Techniques)系統而言， 6 dB 頻寬至少應有 500 千赫(kHz)。

測試架構圖：

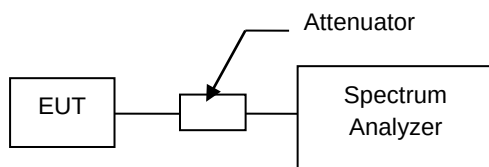


4.2.6 峰值發射電功率密度之要求

合格標準：

依據 NCC 低功率射頻器材技術規範(LP0002)之 4.10.1.6(2)(B)節之要求，數位調變技術(Digital Modulation Techniques)系統之功率密度,再使用頻率範圍之任意 3 kHz 頻寬內,由發射機傳導至天線之峰值發射電功率密度在任意期間內,皆不得大於 8 dBm(複合系統時，關閉跳頻作業狀態檢驗)。

測試架構圖：

測試場地測試配置如圖所示。

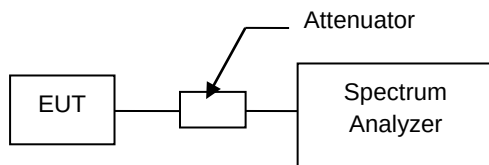

4.2.7 電波暴露量之評估

合格標準：

若受測物於正常操作模式下，其發射機距離人體 20 公分以上者，可測試最大暴露允許值(Maximum Permissible Exposure, MPE)以證明其符合電波暴露量之要求。限制值如下：

6.20.2.1 職業性/可控制之暴露

頻率範圍 (MHz)	電場強度 (V/m)	磁場強度 (A/m)	功率密度 (mW/cm ²)	平均時間 (minutes)
0.3~3.0	614	1.63	*100	6
3~30	1842/f	4.89/f	*900/f ²	6
30~300	61.4	0.163	1.0	6
300~1,500	-----	-----	f/300	6
1,500~100,000	-----	-----	5.0	6

註 1：標記*表平面波等效功率密度。

註 2：f 表測試頻率，單位：MHz。

6.20.2.2 一般人/不可控制之暴露

頻率範圍 (MHz)	電場強度 (V/m)	磁場強度 (A/m)	功率密度 (mW/cm ²)	平均時間 (minutes)
0.3~1.34	614	1.63	*100	30
1.34~30	824/F	2.19/F	*180/F ²	30
30~300	27.5	0.073	0.2	30
300~1,500	-----	-----	F/1500	30
1,500~100,000	-----	-----	1.0	30

註 1：標記*表平面波等效功率密度。

註 2：f 表測試頻率，單位：MHz。

4.3 5 GHz U-NII 檢驗項目

4.3.1 場強輻射與非必要頻帶之量測

場強輻射合格標準：

依據 NCC 低功率射頻器材技術規範(LP0002)之落於第 3.5 節禁用頻段之輻射發射，應符合第 3.6 節之規定。

依據 NCC 低功率射頻器材技術規範第 3.5 節之規定,禁用頻段如下：

頻率(MHz)	頻率(MHz)	頻率(MHz)	頻率(MHz)
0.090~0.110	108.00~138.00	1660.0~1785.0	8025.0~8500.0
0.490~0.510	149.90~150.05	1805.0~1880.0	9000.0~9200.0
2.172~2.198	156.70~156.90	1885.0~1900.0	9300.0~9500.0
3.013~3.033	162.01~167.17	1905.0~1985.0	10600~12700
4.115~4.198	167.72~173.20	2010.0~2025.0	13250~13400
5.670~5.690	240.00~285.00	2110.0~2170.0	14470~14500
6.200~6.300	322.00~335.40	2200.0~2300.0	15350~16200
8.230~8.400	399.90~410.00	2310.0~2390.0	17700~21400
12.265~12.600	485.00~510.00	2483.5~2900.0	22010~23120
13.340~13.430	608.00~614.00	3260.0~3267.0	23600~24000
14.965~15.020	703.00~748.00	3332.0~3339.0	31200~31800
16.700~16.755	758.00~803.00	3345.8~3358.0	36430~36500
19.965~20.020	825.00~915.00	3500.0~4400.0	38600 以上
25.500~25.700	930.00~1240.0	4500.0~5250.0	
37.475~38.275	1300.0~1427.0	5350.0~5460.0	
73.500~75.400	1435.0~1626.5	7250.0~7750.0	

依據 NCC 低功率射頻器材技術規範第 3.6 節之規定,除本規範各章節另有放寬規定者外，其電場強度不得超過下表之限值，且其不必要之發射皆不得大於主波發射強度。

頻 率 (MHz)	電場強度 (μ V/m)	測距(m)
0.009 - 0.490(含)	2,400/頻率(千赫)	300
0.490 (不含) – 1.705 (含)	24,000/頻率(千赫)	30
1.705(不含) – 30 (不含)	30	30
30 (含) – 88 (含)	100	3
88 (不含)- 216 (含)	150	3
216 (不含)- 960 (含)	200	3
960 (不含)以上	500	3

非必要頻帶合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之 5.7.4 節之要:

不必要發射之限值：在操作頻帶外的峰值發射應衰減至符合下列限值：

1. 在 5.15 GHz~5.35 GHz 及 5.470 GHz~5.725 GHz 頻帶操作的發射器：帶外發射之有效等向輻射功率(EIRP) $\leq$ -27 dBm/MHz。
2. 在 5.725 GHz~5.850 GHz 的頻帶操作之發射器：所有頻帶邊緣的頻率發射，其有效等向輻射功率(EIRP) $\leq$ 27 dBm/MHz；所有頻帶邊緣向外 5 MHz 內頻率之發射從有效等向輻射功率(EIRP) $\leq$ 27 dBm/MHz 線性減少至有效等向輻射功率(EIRP) $\leq$ 15.6 dBm/MHz；所有頻帶邊緣向外 25 MHz 內頻率之發射從有效等向輻射功率(EIRP) $\leq$ 15.6 dBm/MHz 線性減少至有效等向輻射功率(EIRP) $\leq$ 10 dBm/MHz；所有頻帶邊緣向外 75 MHz 內頻率之發射從有效等向輻射功率(EIRP) $\leq$ 10 dBm/MHz 線性減少至有效等向輻射功率(EIRP) $\leq$ -27 dBm/MHz；所有頻帶邊緣向外 75 MHz 頻率之發射的有效等向輻射功率(EIRP) $\leq$ -27 dBm/MHz。
3. 量測不必要發射時，應使用之最低解析頻寬為 1 MHz。必要時，於頻帶邊緣附近可使用小於 1 MHz 之解析頻寬，並以補償方式計算其總值。
4. 當測量不必要發射之限值時，應將待測物的載波頻率調整到儘可能接近設備設計所允許的上、下頻帶邊緣。
5. 在 1 GHz 以下的不必要之發射，應符合第 3.6 條之規定，任何使用市電為供應電源之設備亦須符合 3.3 條之電源線傳導限值。
6. 不必要發射頻率屬第 3.5 條規定頻帶者，應符合第 3.6 條之規定。

測試方法：

測試場地為開放測試場，將待測物置於 0.8 米高的非金屬桌面，使其在工作狀態，接收天線置於 3 米外相同的高度。待測物分別要垂直或水平放置，而且桌面要 360 度旋轉，另外接收天線也要從 1.0 米至 4.0 米升降變化，以找出最大的輻射電場強度，接收天線置於水平、垂直極向各執行測試一次。


場強度之計算

場強之計算公式為：結果值 = 讀值 + 校正因子


其中校正因子為：天線因子 + 饋線損失 + 濾波器損失（若有使用） - 放大器增益（若有使用）

測試架構圖：

量測頻率低於 1 GHz 以下之測試配置

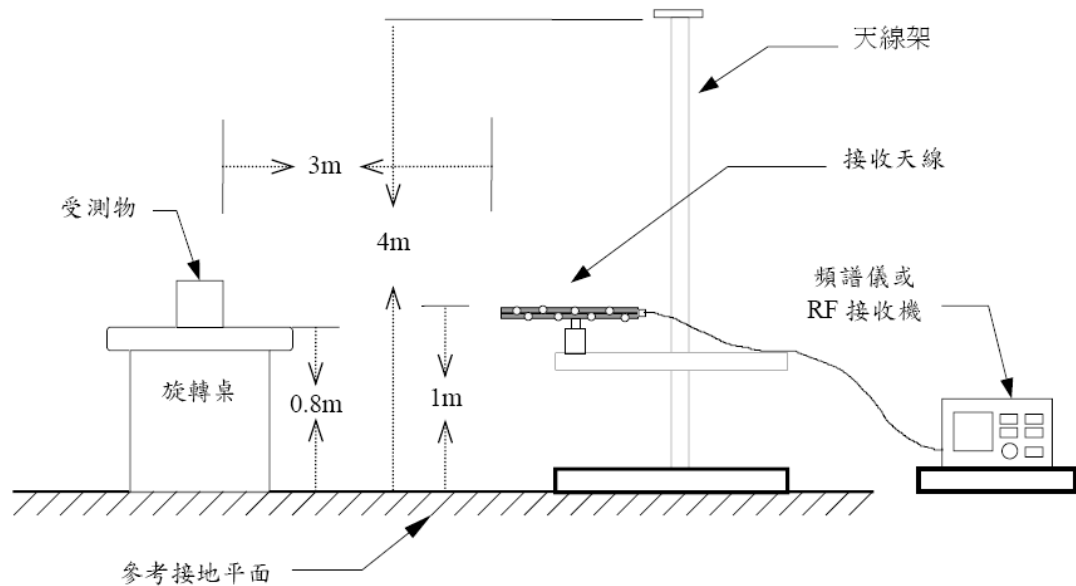

量測頻率高於 1 GHz 以上之測試配置

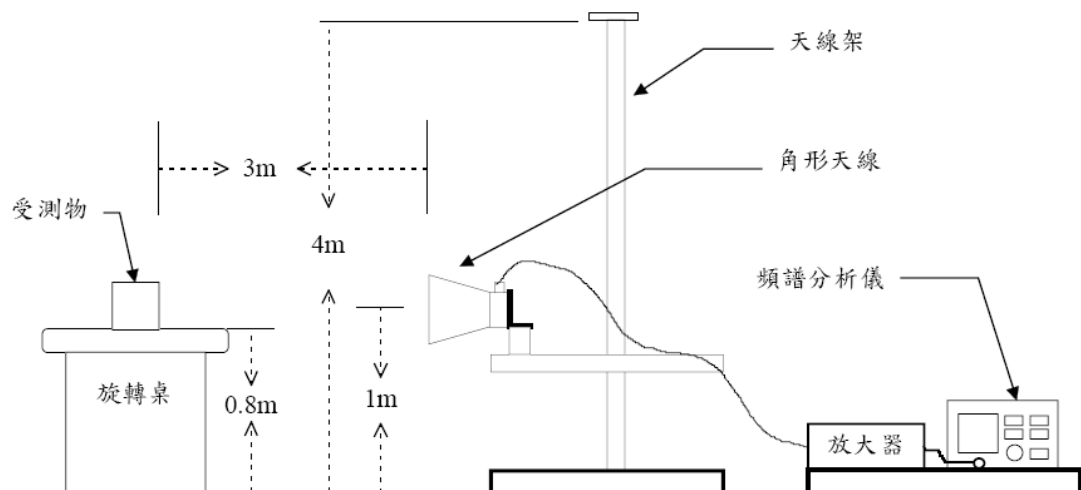

4.3.2 最大傳導輸出功率之量測

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之 5.7.3 節之要求:

1. 5.15-5.25 GHz 頻帶

(1) 供戶外操作使用:

- 最大傳導輸出功率不能超過 1 W。
- 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
- 在水平面仰角超過 30 度時，其最大 EIRP 不能超過 21 dBm。

(2) 供室內操作使用:

- 最大傳導輸出功率不能超過 1 W。
- 在任何 1MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

(3) 供固定式點對點操作使用:

- 最大傳導輸出功率不能超過 1 W。
- 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 23 dBi 方向增益之指向性天線時，應依超過 23 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
- 固定式點對點操作，不包括點對多點系統、全方向性應用及多台共站發射機傳送相同資訊。

(4) 供行動或可攜式裝置操作使用:

- 最大傳導輸出功率不能超過 250 mW。
- 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 11 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

2. 5.25-5.35 GHz 與 5.470-5.725 GHz 頻帶


- (1) 最大傳導輸出功率不能超過 250 mW 或 $11 \text{ dBm} + 10 \log B$ (B 是 26 dB 發射頻寬，單位 MHz)之較小者。
- (2) 最大功率頻譜密度在任何 1 MHz 頻帶中不能超過 11 dBm。
- (3) 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

3. 5.725-5.850 GHz 頻帶

- (1) 最大傳導輸出功率不能超過 1 W。
- (2) 在任何 500 kHz 頻帶中最大功率頻譜密度不能超過 30 dBm。
- (3) 供固定式點對點操作時，使用方向增益超過 6 dBi 之發射天線，可不需對應減少發射器之傳導輸出功率限制值。
- (4) 除(3)外，使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

4. 最大傳導輸出功率必須使用依據均方根等效電壓校準之儀器量測於任何連續傳輸之時段，量測結果須依儀器限制（如偵測器反應時間、相較於發射頻寬有限之解析頻寬能力，靈敏度等）調整得出正確之峰值量測，以符合本段落所提之發射定義。

測試架構圖：

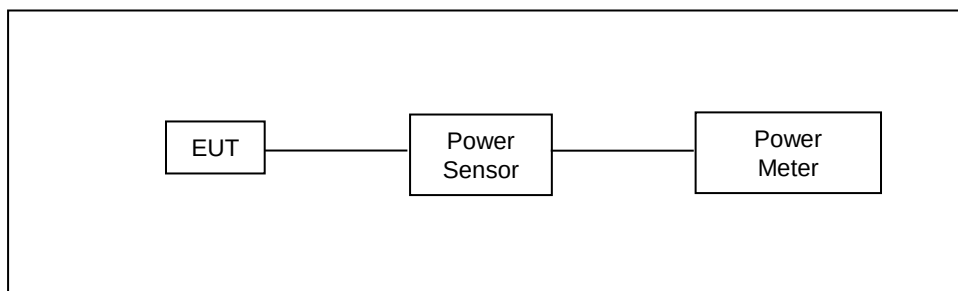

4.3.3 最大傳導功率頻譜密度之要求

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)之 5.7.3 節之要求:

1. 5.15-5.25 GHz 頻帶

(1) 供戶外操作使用:

- 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
- 在水平面仰角超過 30 度時，其最大 EIRP 不能超過 21 dBm。

(2) 供室內操作使用:

- 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

(3) 供固定式點對點操作使用:

- 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 23 dBi 方向增益之指向性天線時，應依超過 23 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
- 固定式點對點操作，不包括點對多點系統、全方向性應用及多台共站發射機傳送相同資訊。

(4) 供行動或可攜式裝置操作使用:

- 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 11 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

2. 5.25-5.35 GHz 與 5.470-5.725 GHz 頻帶

(1) 最大功率頻譜密度在任何 1 MHz 頻帶中不能超過 11 dBm。

(2) 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

3. 5.725-5.850 GHz 頻帶

(1) 在任何 500 kHz 頻帶中最大功率頻譜密度不能超過 30 dBm。

(2) 供固定式點對點操作時，使用方向增益超過 6 dBi 之發射天線，可不需對應減少發射器之傳導輸出功率限制值。

(3) 除(2)外，使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

4. 最大功率頻譜密度量測規定:


(1) 應將量測儀器直接連接待測物，以傳導方式執行。

(2) 5.15 GHz~5.25 GHz、5.25 GHz~5.35 GHz 及 5.47 GHz~5.725 GHz 頻帶，量測儀器之頻寬應設定為 1 MHz 頻寬或待測物之 26 dB 發射頻寬，兩者取較小者。

(3) 5.725 GHz~5.850 GHz 頻帶，量測器之頻寬應設定為 500 kHz 或待測物之 26 dB 發射頻寬，兩者取較小者。

(4) 解析頻寬小於(2)或(3)時，應以補償方式計算總功率頻譜密度。

測試架構圖：

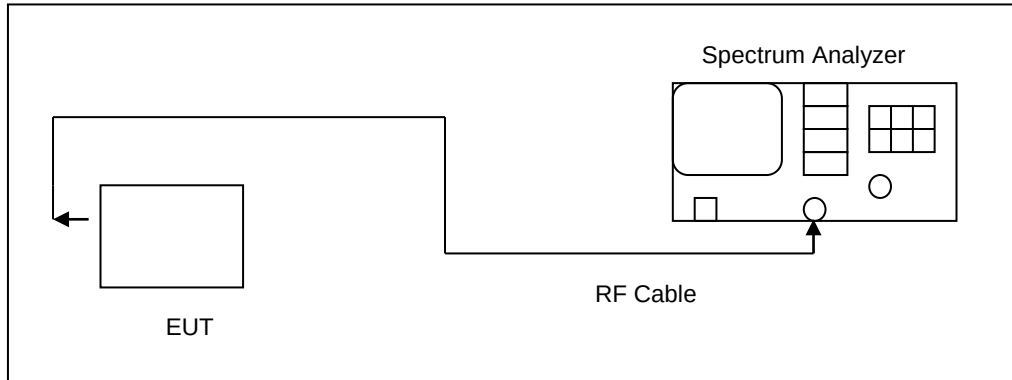


4.3.4 26 dB頻寬之要求

合格標準:

N/A

測試架構圖：

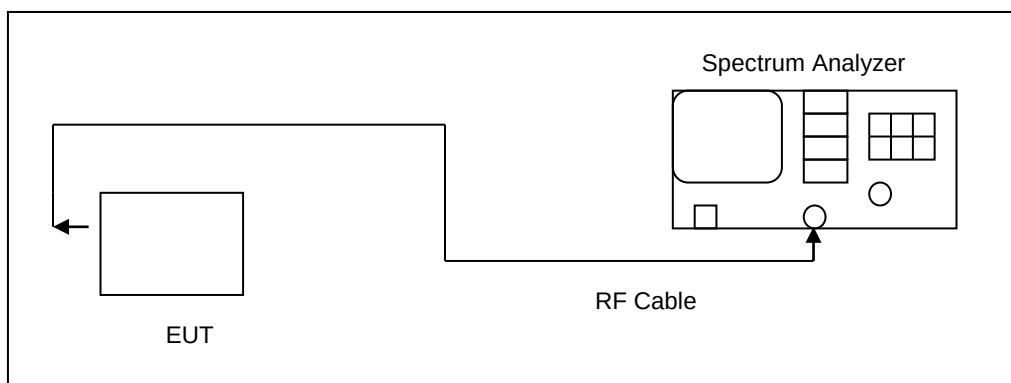


4.3.5 6 dB頻寬之要求

合格標準:

在 5.725 GHz~5.850 GHz 頻帶操作之設備，其 6 dB 頻寬至少應有 500 kHz。

測試架構圖：

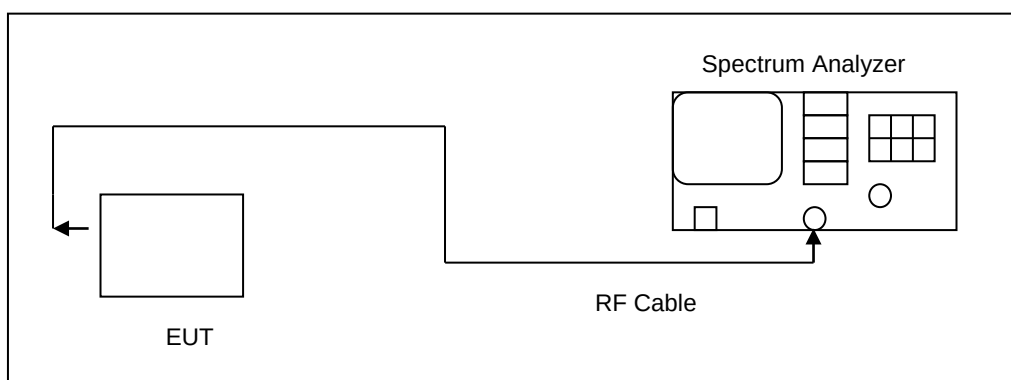


4.3.6 發射功率控制(TPC)之量測

合格標準：

依據 NCC 低功率射頻器材技術規範(LP0002)5.7.7.1 節之要求，發射功率控制(TPC)操作於 5.25 GHz~5.35 GHz 與 5.470 GHz~5.725 GHz 頻帶的設備，應具備發射功率控制功能。設備必須至少具有 6 dB 低於平均 EIRP 值 30 dBm 的能力。EIRP 值低於 500 mW 之系統不須具備 TPC 功能。

測試架構圖：

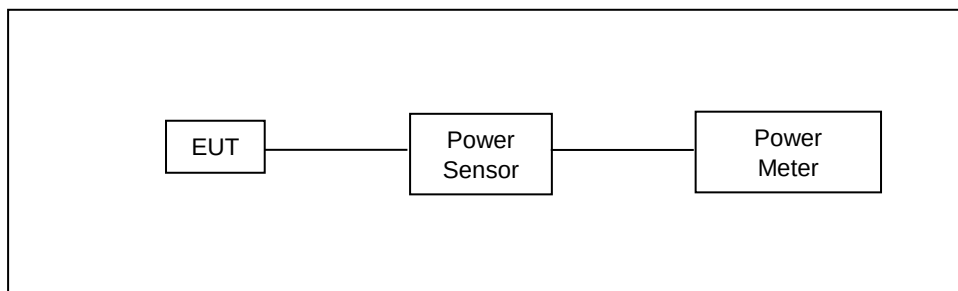

4.3.7 動態頻率選擇(DFS)之量測

合格標準:

依據 NCC 低功率射頻器材技術規範(LP0002)5.7.7.2 節之要求, 操作於 5.25 GHz~5.35 GHz 與 5.470 GHz~5.725 GHz 頻帶之設備應具備動態頻率選擇雷達偵測功能並啟動之, 以完整偵測使用頻帶內之雷達訊號, 避免與雷達系統

同頻道操作。相關規定如下:


最低動態頻率選擇的偵測門檻

- 最大 EIRP 為 200 mW 至 1 W 之設備, 其最低動態頻率選擇的偵測門檻值為-64 dBm。
- 最大 EIRP 低於 200 mW, 且功率頻譜密度小於 10 dBm/MHz 之設備, 其最低動態頻率選擇的偵測門檻值為-62 dBm。
- 最大 EIRP 低於 200 mW, 且功率頻譜密度大於或等於 10 dBm/MHz 之設備, 其最低動態頻率選擇的偵測門檻值為-64dBm。
- 此偵測門檻值為 1 微秒內之平均接收功率, 並以 0 dBi 天線為參考基準。頻道初始設定得由系統隨機選取或使用者手動選取。

操作模式: 動態頻率選擇之規定適用於以下之操作模式:

- 頻道可用性檢查時間之規定, 適用於主控運作模式。
- 頻道移動時間之規定, 適用於主控及受控運作模式。

測試架構圖:

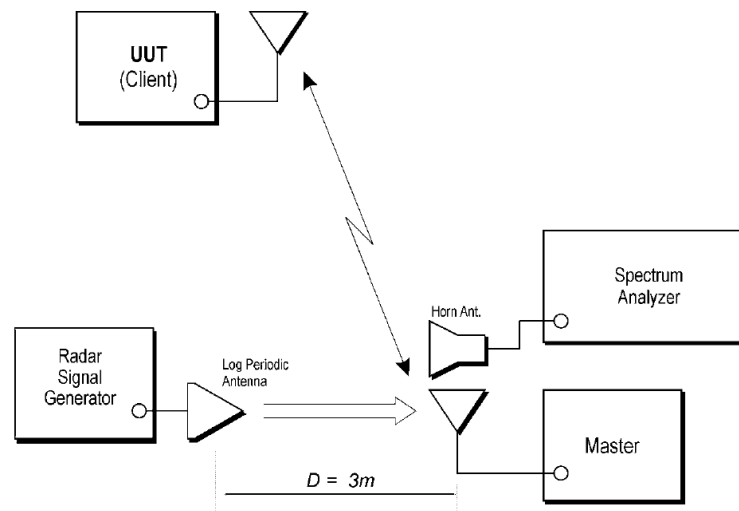


4.3.8 頻道可用性檢查時間之量測

合格標準：

依據 NCC 低功率射頻器材技術規範(LP0002)之 5.7.7.2(3)節之要求，設備必須檢查其可在某一頻道上起始傳送之前是否有雷達系統已經操作在該頻道上，以及何時其必須移動到另一新的頻道，在 60 秒內若沒有偵測到功率位準大過上述之干擾門檻值的雷達信號時，設備才可開始使用該頻道。

測試架構圖：

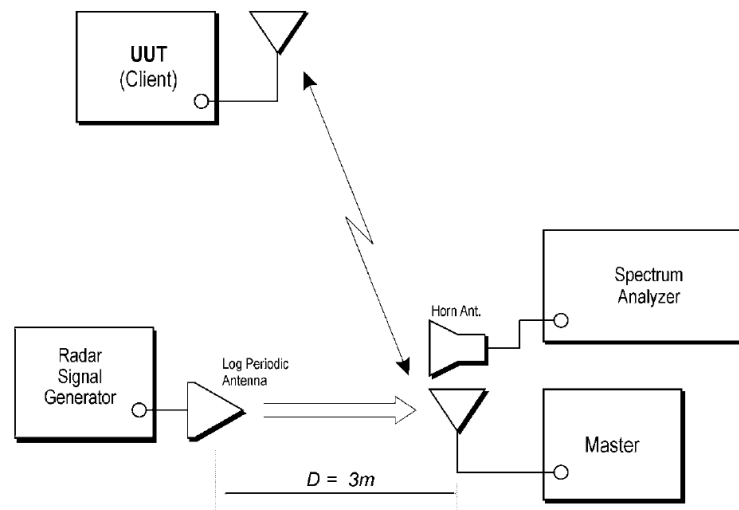


4.3.9 頻道移動時間之量測

合格標準：

依據 NCC 低功率射頻器材技術規範(LP0002)之 5.7.7.2(4)節之要求，在偵測到雷達的存在後，所有在該操作頻道上所有傳輸須在 10 秒內停止，在偵測到雷達信號後，該期間內的傳輸應維持最多 200 毫秒的正常通訊。另外，間歇性的管理與控制信號可在剩餘的時間中傳送，以便撤離該操作頻道。

測試架構圖：

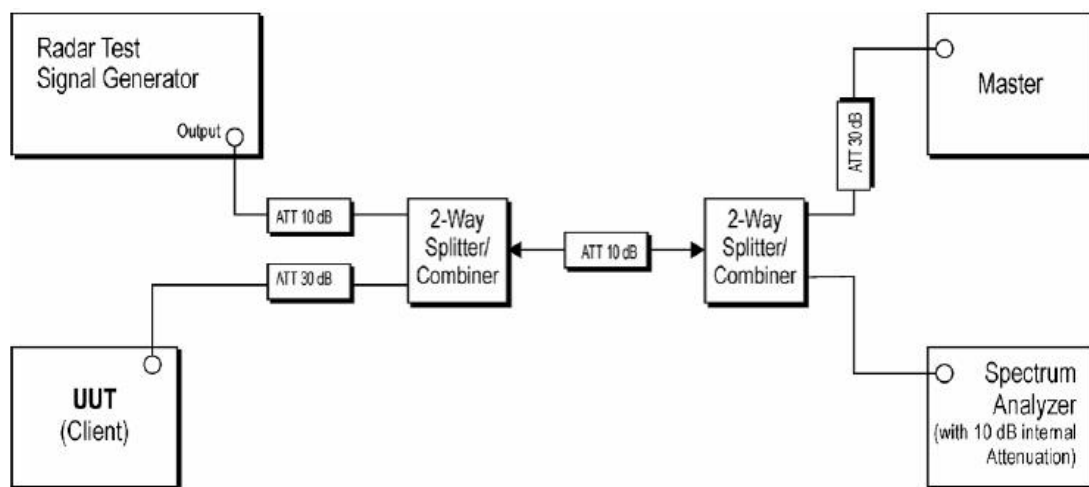


Product		Manufacturer	Model No.	ID
1.	Wiress-AX6000 同步雙頻無線路由器	ASUS	RT-AX88U	NCC ID : CCAF18LP1530T1

4.3.10 不可佔用時間之量測

合格標準：

依據 NCC 低功率射頻器材技術規範(LP0002)之 5.7.7.2(5)節之要求，某一頻道已被頻道可用性檢查或”服務中”監視顯示含有雷達系統，至少須有 30 分鐘的不可佔用期間。不可佔用期間起始於偵測到雷達系統的當時。

測試架構圖：

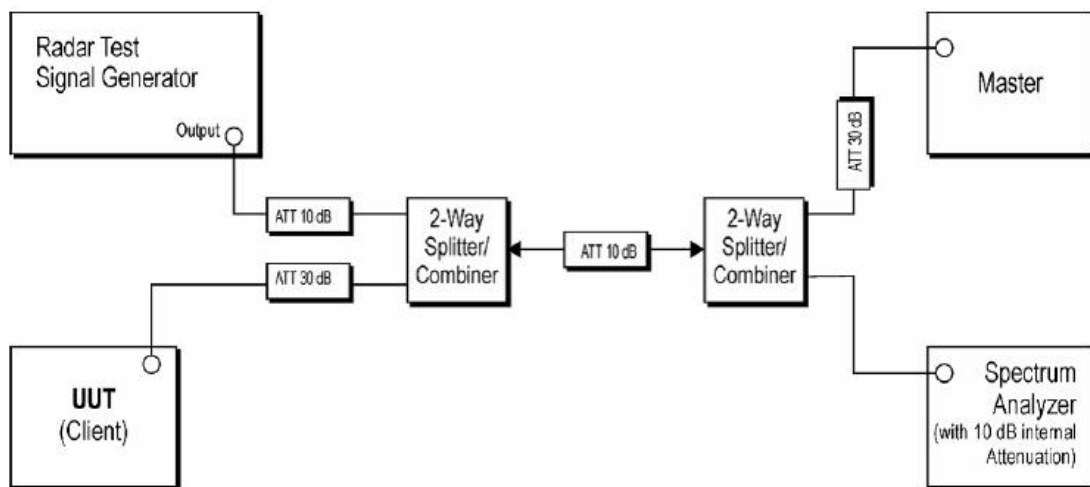

4.3.11 天線規格之要求

合格標準:

據 NCC 低功率射頻器材技術規範(LP0002)之 5.7.8 節之要求，天線之規格不受第 3.2 節規定之限制

判定結果: 符合。

4.3.12 電波暴露量之評估

合格標準:

若受測物於正常操作模式下，其發射機距離人體 20 公分以上者，可測試最大暴露允許值(Maximum Permissible Exposure, MPE)以證明其符合電波暴露量之要求。限制值如下：

6.20.2.1 職業性/可控制之暴露

頻率範圍 (MHz)	電場強度 (V/m)	磁場強度 (A/m)	功率密度 (mW/cm ²)	平均時間 (minutes)
0.3~3.0	614	1.63	*100	6
3~30	1842/f	4.89/f	*900/f ²	6
30~300	61.4	0.163	1.0	6
300~1,500	-----	-----	f/300	6
1,500~100,000	-----	-----	5.0	6

註 1：標記*表平面波等效功率密度。

註 2：f 表測試頻率，單位：MHz。

6.20.2.2 一般人/不可控制之暴露

頻率範圍 (MHz)	電場強度 (V/m)	磁場強度 (A/m)	功率密度 (mW/cm ²)	平均時間 (minutes)
0.3~1.34	614	1.63	*100	30
1.34~30	824/F	2.19/F	*180/F ²	30
30~300	27.5	0.073	0.2	30
300~1,500	-----	-----	F/1500	30
1,500~100,000	-----	-----	1.0	30


註 1：標記*表平面波等效功率密度。

註 2：f 表測試頻率，單位：MHz。

5. Test Results

Annex A. Conducted Emission

Standard:	LP0002	Line:	L1
Test item:	Conducted Emission	Power:	AC 110 V/60 Hz
Mode:	Mode 1		
Description:			

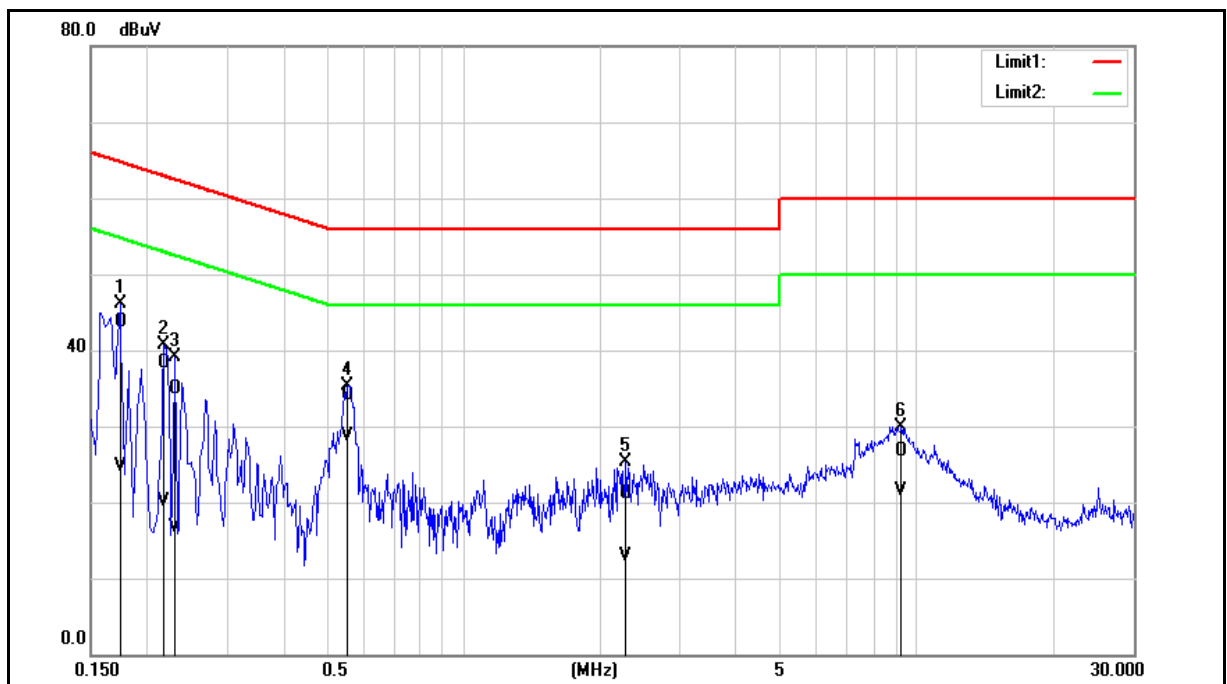


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1740	33.95	15.02	9.70	43.65	24.72	64.77	54.77	-21.12	-30.05	Pass
2	0.2180	28.56	10.42	9.70	38.26	20.12	62.89	52.89	-24.63	-32.77	Pass
3	0.2300	25.27	6.96	9.70	34.97	16.66	62.45	52.45	-27.48	-35.79	Pass
4	0.5540	24.46	18.93	9.71	34.17	28.64	56.00	46.00	-21.83	-17.36	Pass
5	2.2740	11.27	3.12	9.76	21.03	12.88	56.00	46.00	-34.97	-33.12	Pass
6	9.2060	16.87	11.59	9.87	26.74	21.46	60.00	50.00	-33.26	-28.54	Pass

註：1. 干擾值(dBuV) = 校正係數(dB) + 讀值(dBuV)。

2. 校正係數(dB) = 量測信號線損失(dB) + 電源阻抗模擬網路係數(dB)。

Standard:	LP0002	Line:	N
Test item:	Conducted Emission	Power:	AC 110 V/60 Hz
Mode:	Mode 1		
Description:			

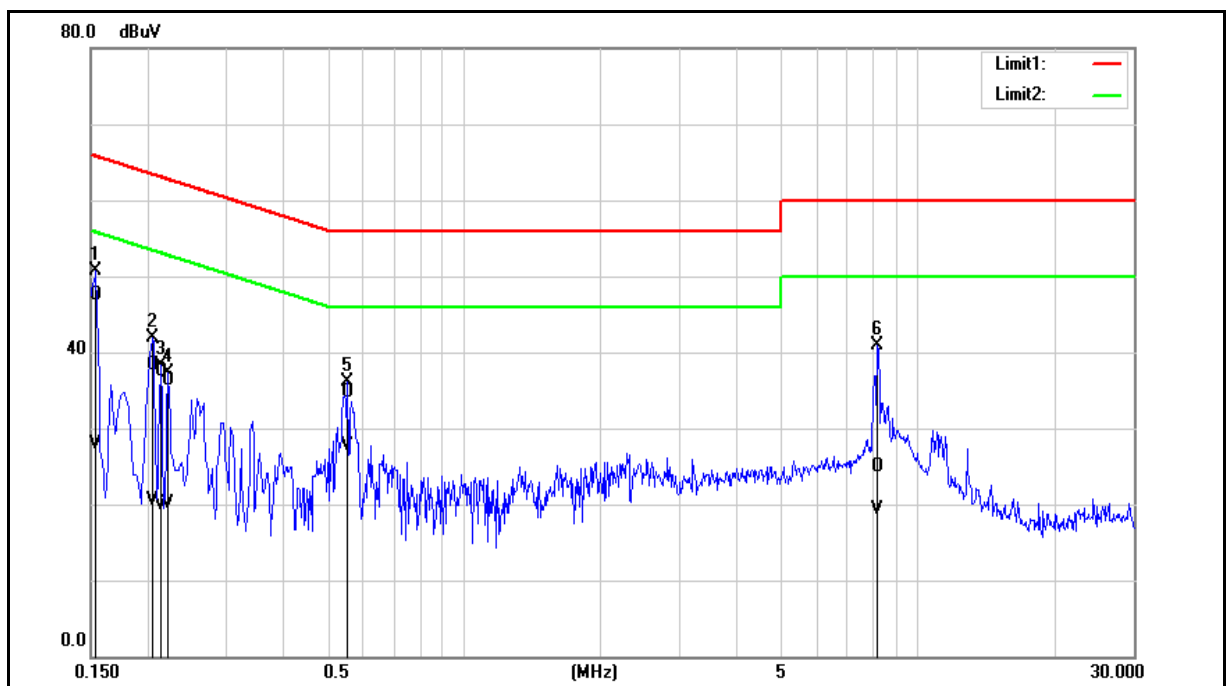

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1540	37.74	18.19	9.69	47.43	27.88	65.78	55.78	-18.35	-27.90	Pass
2	0.2060	28.62	10.72	9.69	38.31	20.41	63.37	53.37	-25.06	-32.96	Pass
3	0.2140	27.81	10.25	9.69	37.50	19.94	63.05	53.05	-25.55	-33.11	Pass
4	0.2220	26.62	10.36	9.69	36.31	20.05	62.74	52.74	-26.43	-32.69	Pass
5	0.5540	25.07	17.92	9.70	34.77	27.62	56.00	46.00	-21.23	-18.38	Pass
6	8.1820	14.96	9.41	9.85	24.81	19.26	60.00	50.00	-35.19	-30.74	Pass

註：1. 干擾值(dBuV) = 校正係數(dB) + 讀值(dBuV)。

2. 校正係數(dB) = 量測信號線損失(dB) + 電源阻抗模擬網路係數(dB)。

With HDMI

Standard: LP0002


Line: L1

Test item: Conducted Emission

Power: AC 110 V/60 Hz

Mode: Mode 1

Description:

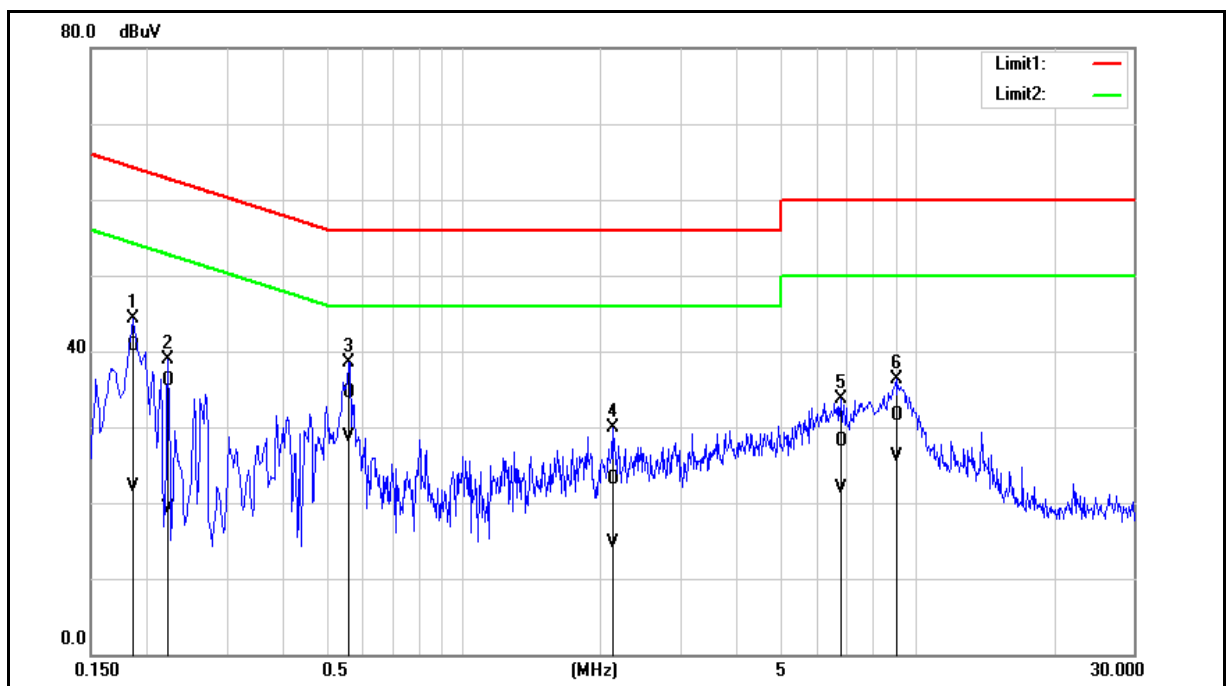


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1860	31.01	12.33	9.70	40.71	22.03	64.21	54.21	-23.50	-32.18	Pass
2	0.2220	26.41	9.52	9.70	36.11	19.22	62.74	52.74	-26.63	-33.52	Pass
3	0.5580	24.78	18.90	9.71	34.49	28.61	56.00	46.00	-21.51	-17.39	Pass
4	2.1260	13.28	5.00	9.76	23.04	14.76	56.00	46.00	-32.96	-31.24	Pass
5	6.7740	18.17	12.10	9.84	28.01	21.94	60.00	50.00	-31.99	-28.06	Pass
6	8.9700	21.55	16.29	9.87	31.42	26.16	60.00	50.00	-28.58	-23.84	Pass

註：1. 干擾值(dBuV) = 校正係數(dB) + 讀值(dBuV)。

2. 校正係數(dB) = 量測信號線損失(dB) + 電源阻抗模擬網路係數(dB)。

Standard:	LP0002	Line:	N
Test item:	Conducted Emission	Power:	AC 110 V/60 Hz
Mode:	Mode 1		
Description:			

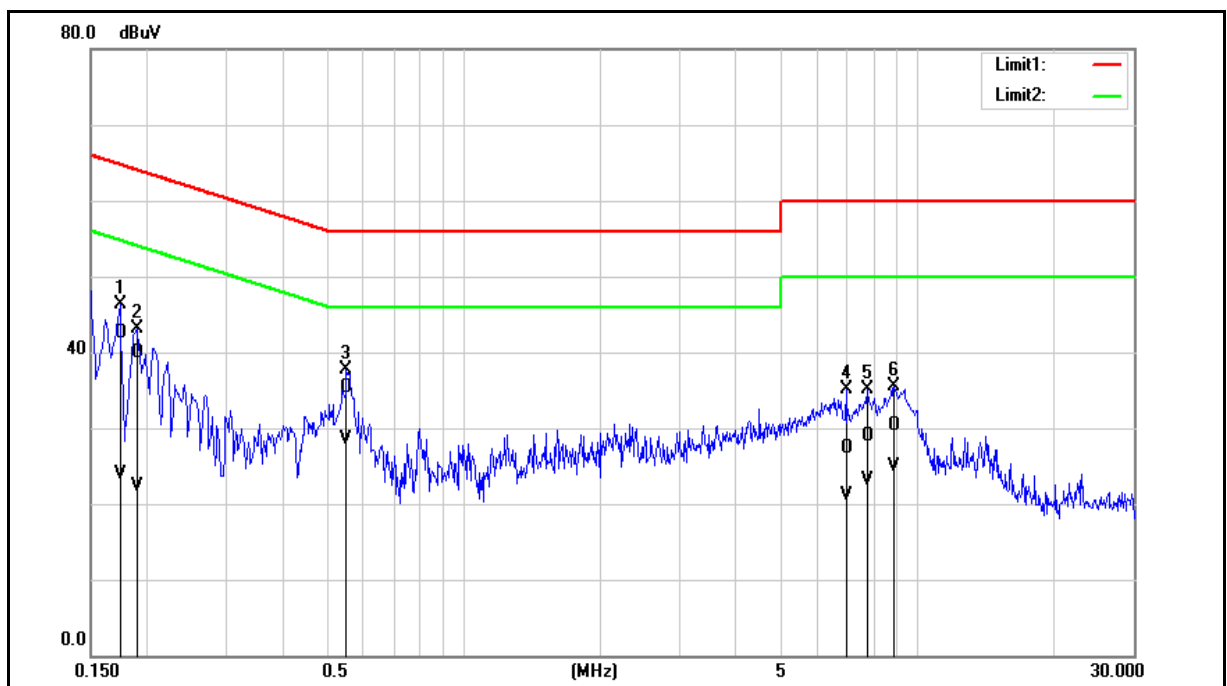

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1740	32.87	14.24	9.69	42.56	23.93	64.77	54.77	-22.21	-30.84	Pass
2	0.1900	30.29	12.61	9.69	39.98	22.30	64.04	54.04	-24.06	-31.74	Pass
3	0.5500	25.56	18.76	9.70	35.26	28.46	56.00	46.00	-20.74	-17.54	Pass
4	6.9780	17.40	11.26	9.84	27.24	21.10	60.00	50.00	-32.76	-28.90	Pass
5	7.7380	19.10	13.31	9.85	28.95	23.16	60.00	50.00	-31.05	-26.84	Pass
6	8.9100	20.42	15.01	9.87	30.29	24.88	60.00	50.00	-29.71	-25.12	Pass


註：1. 干擾值(dBuV) = 校正係數(dB) + 讀值(dBuV)。

2. 校正係數(dB) = 量測信號線損失(dB) + 電源阻抗模擬網路係數(dB)。

Annex B. Radiated Emission Measurement (2.4 GHz)

其它不必要之訊號 (1 GHz 以下)

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	2462 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

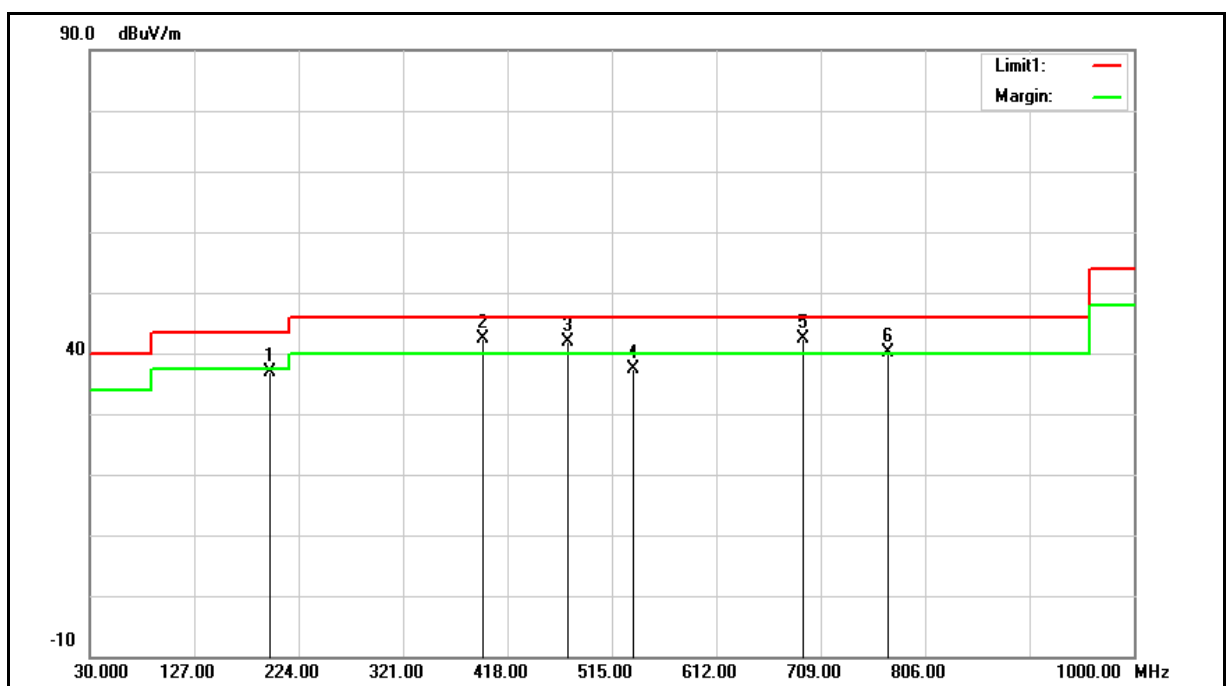

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	197.8100	46.89	-9.92	36.97	43.50	-6.53	QP
2	395.6900	47.20	-4.87	42.33	46.00	-3.67	QP
3	474.2600	45.63	-3.76	41.87	46.00	-4.13	QP
4	534.4000	40.13	-2.80	37.33	46.00	-8.67	QP
5	692.5100	42.46	-0.11	42.35	46.00	-3.65	QP
6	771.0800	38.90	1.17	40.07	46.00	-5.93	QP


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

Example: $36.97 = -9.92 + 46.89$

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	2462 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

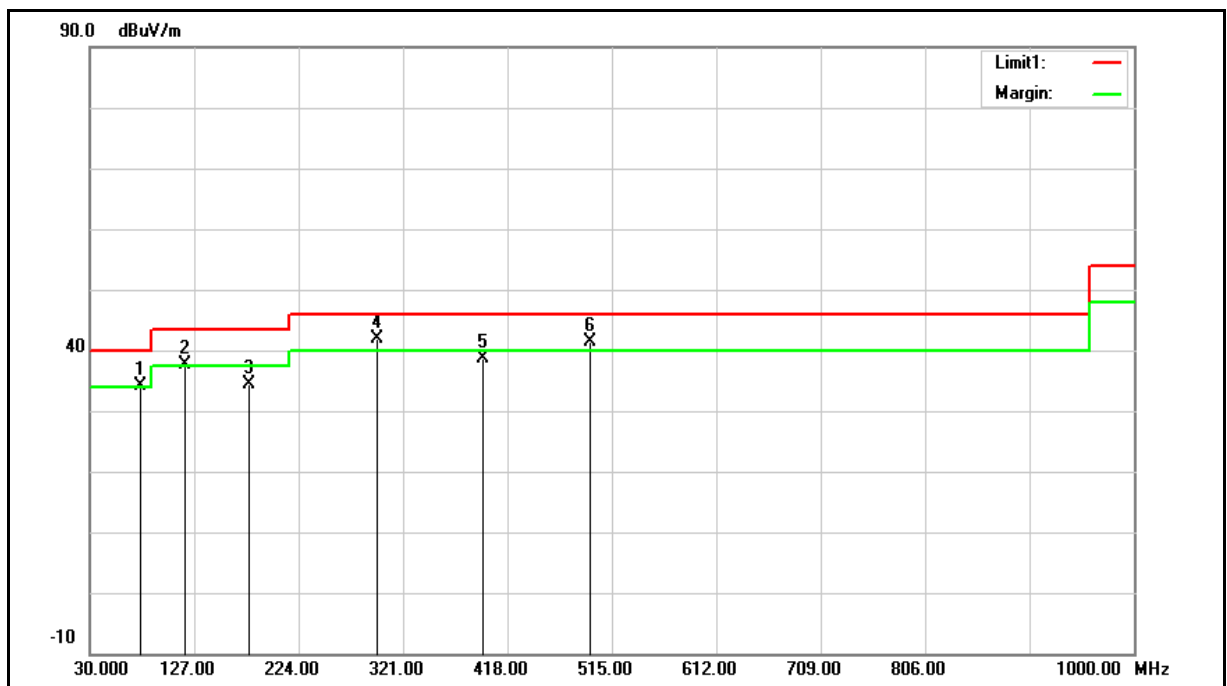

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	76.5600	46.08	-11.96	34.12	40.00	-5.88	QP
2	118.2700	47.64	-10.11	37.53	43.50	-5.97	QP
3	178.4100	43.17	-8.74	34.43	43.50	-9.07	QP
4	296.7500	48.58	-6.61	41.97	46.00	-4.03	QP
5	395.6900	43.40	-4.87	38.53	46.00	-7.47	QP
6	494.6300	44.92	-3.64	41.28	46.00	-4.72	QP

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).


Example: $34.12 = -11.96 + 46.08$

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

場強輻射量測 (1 GHz 以上)

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

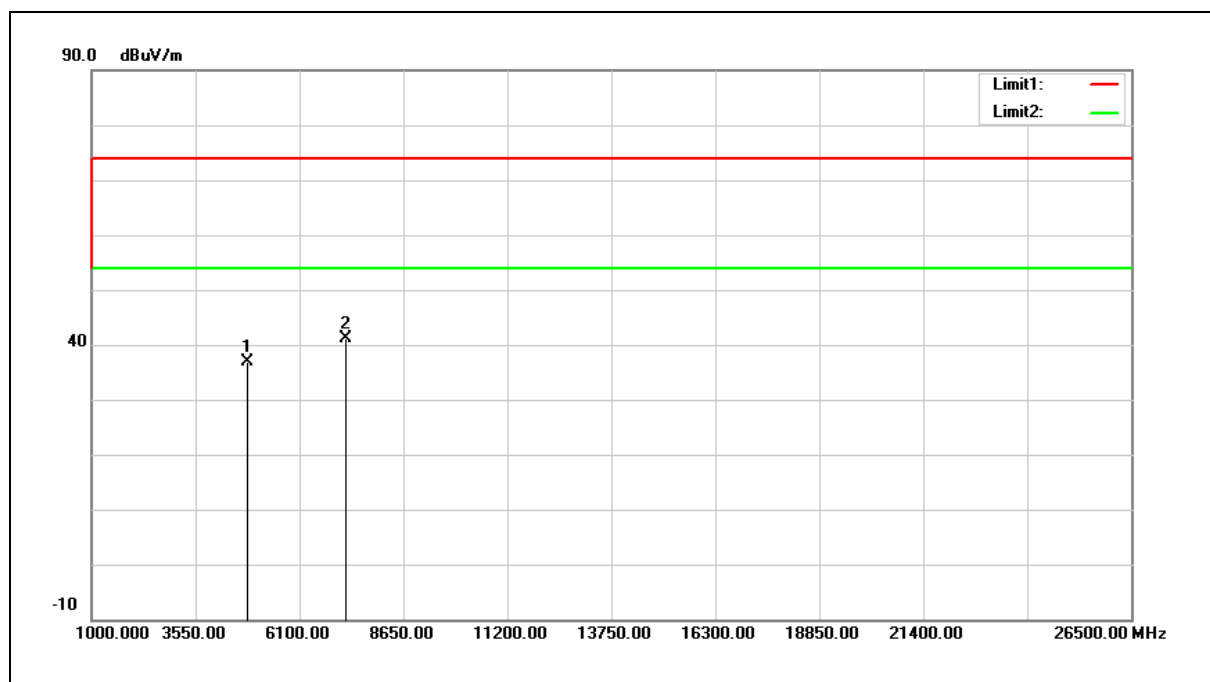

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	38.16	-1.25	36.91	74.00	-37.09	peak
2	7236.000	35.25	5.85	41.10	74.00	-32.90	peak


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

Example: $36.91 = -1.25 + 38.16$

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

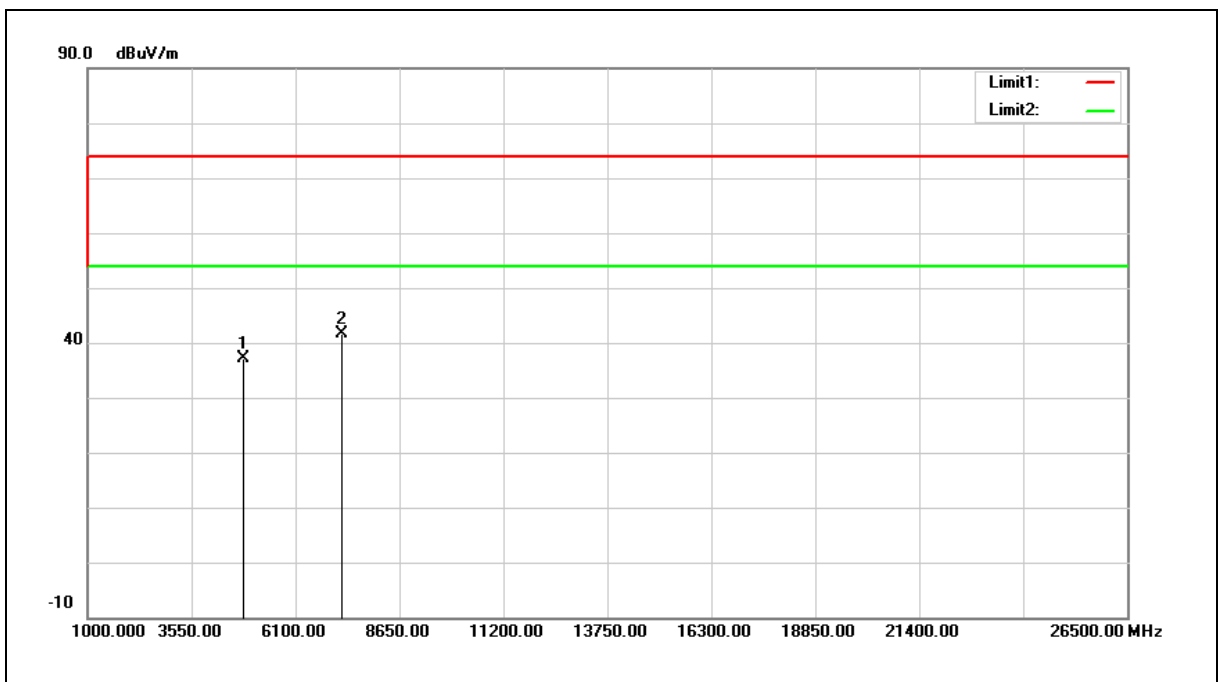

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	38.46	-1.25	37.21	74.00	-36.79	peak
2	7236.000	35.77	5.85	41.62	74.00	-32.38	peak


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

Example: $37.21 = -1.25 + 38.46$

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

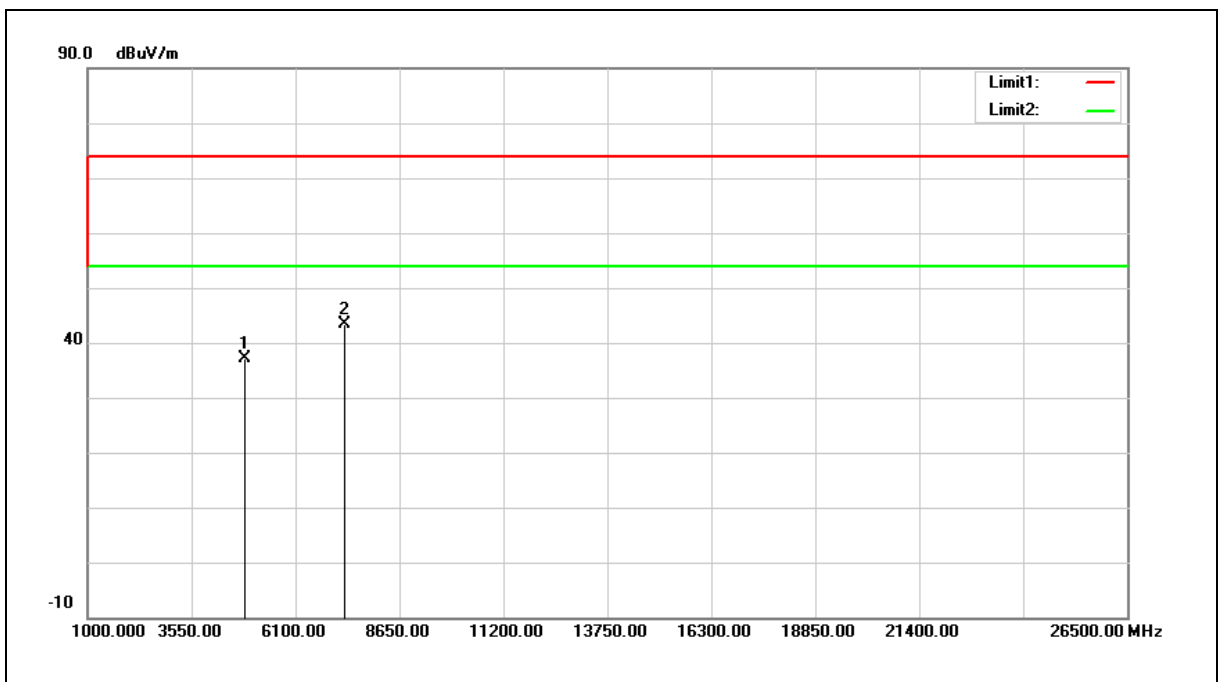


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	38.22	-1.12	37.10	74.00	-36.90	peak
2	7311.000	37.26	6.11	43.37	74.00	-30.63	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

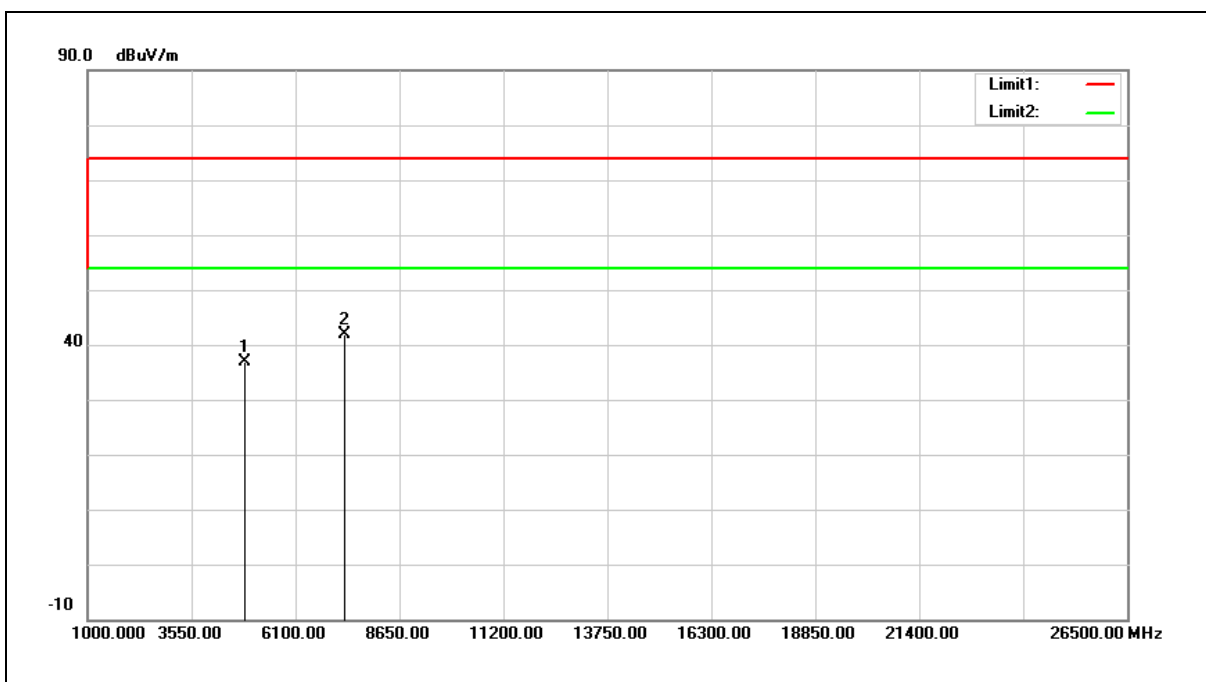


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	38.03	-1.12	36.91	74.00	-37.09	peak
2	7311.000	35.77	6.11	41.88	74.00	-32.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

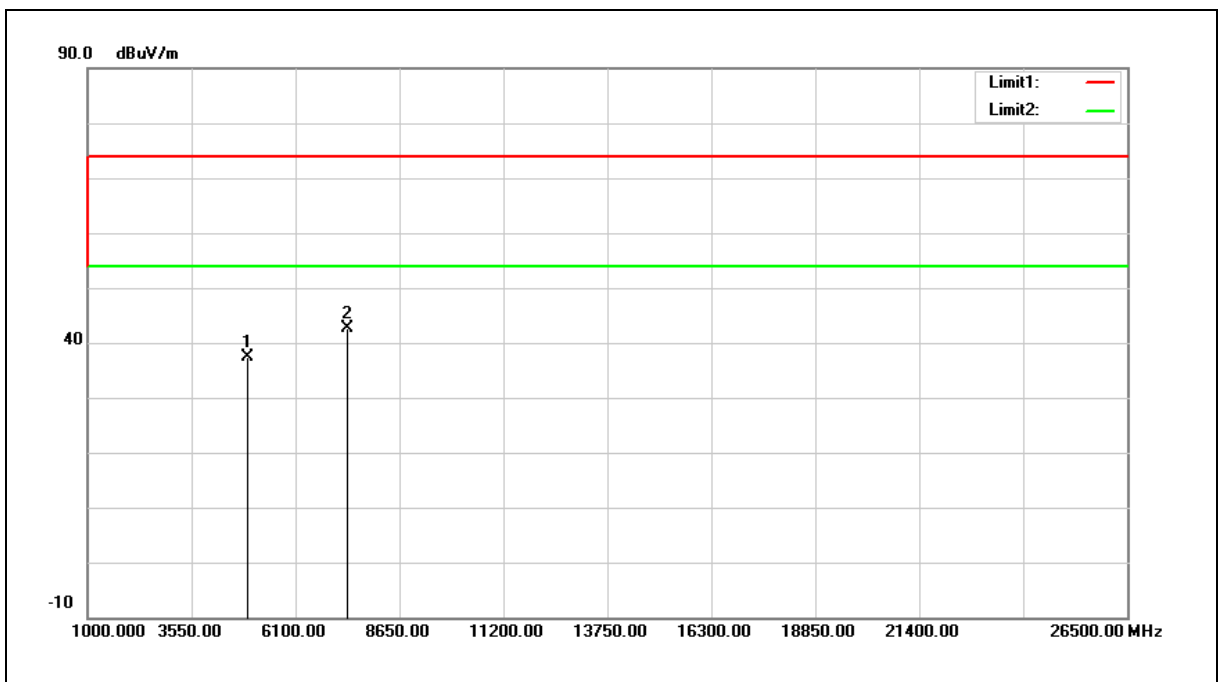


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	38.33	-0.99	37.34	74.00	-36.66	peak
2	7386.000	36.15	6.38	42.53	74.00	-31.47	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

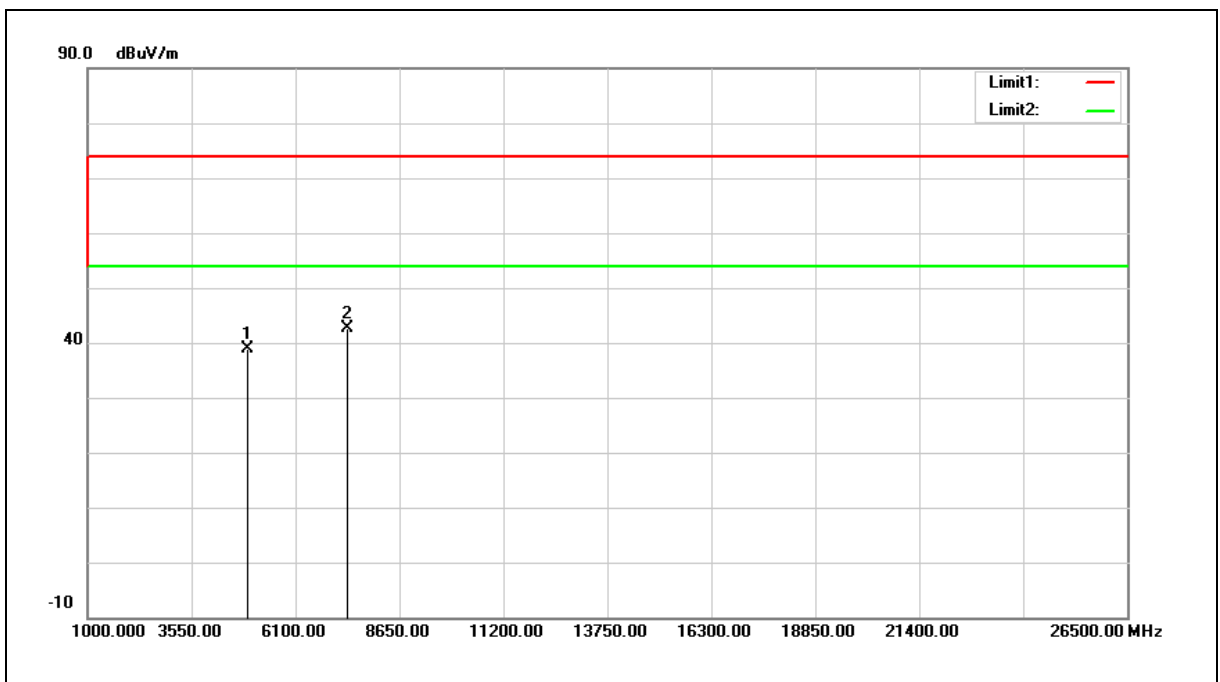


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	39.95	-0.99	38.96	74.00	-35.04	peak
2	7386.000	36.37	6.38	42.75	74.00	-31.25	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

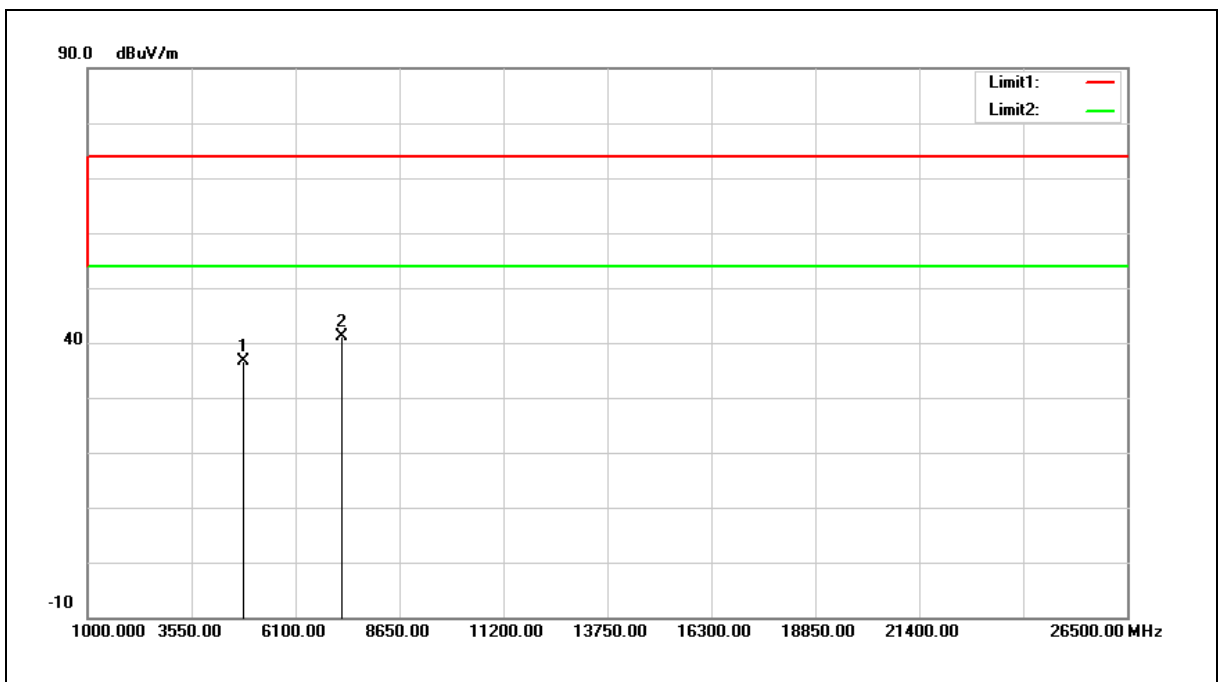


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	37.78	-1.25	36.53	74.00	-37.47	peak
2	7236.000	35.37	5.85	41.22	74.00	-32.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

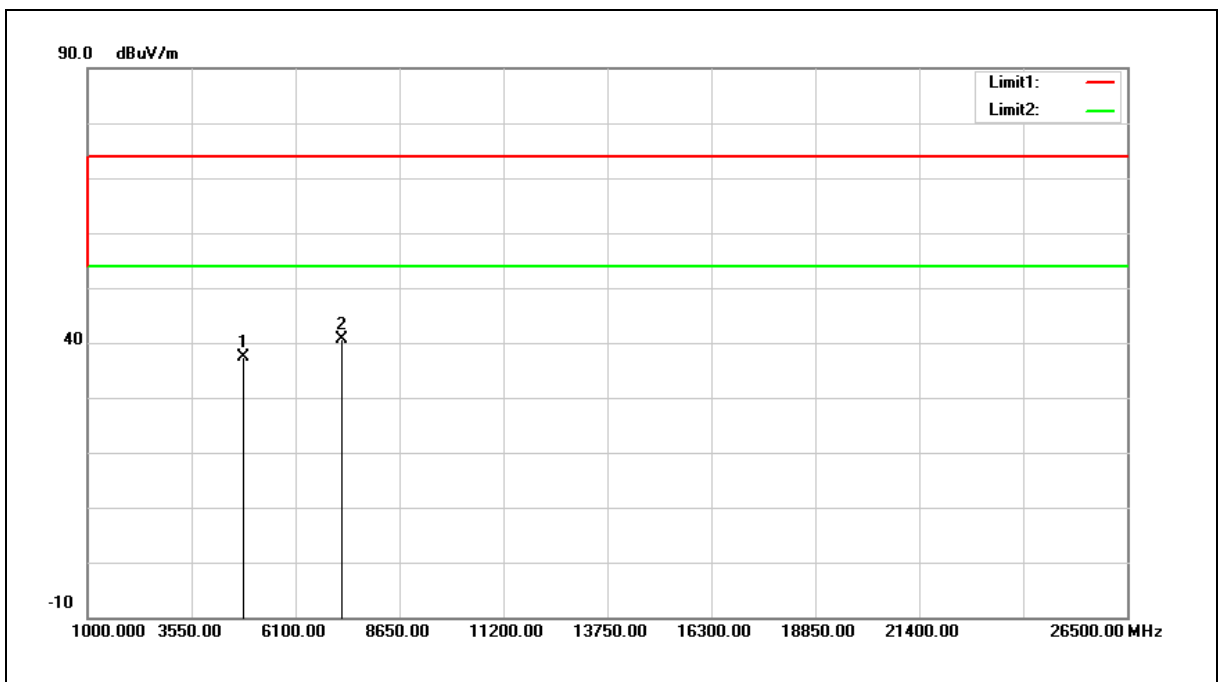


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	38.55	-1.25	37.30	74.00	-36.70	peak
2	7236.000	34.70	5.85	40.55	74.00	-33.45	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

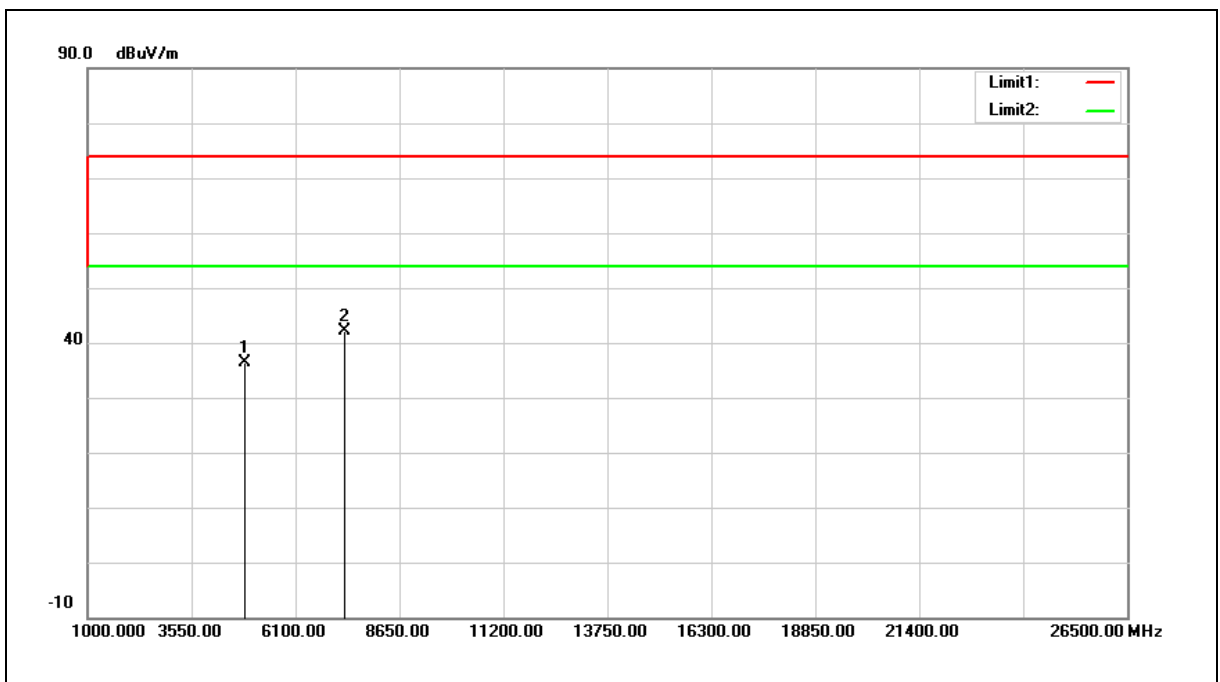


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.58	-1.12	36.46	74.00	-37.54	peak
2	7311.000	36.14	6.11	42.25	74.00	-31.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

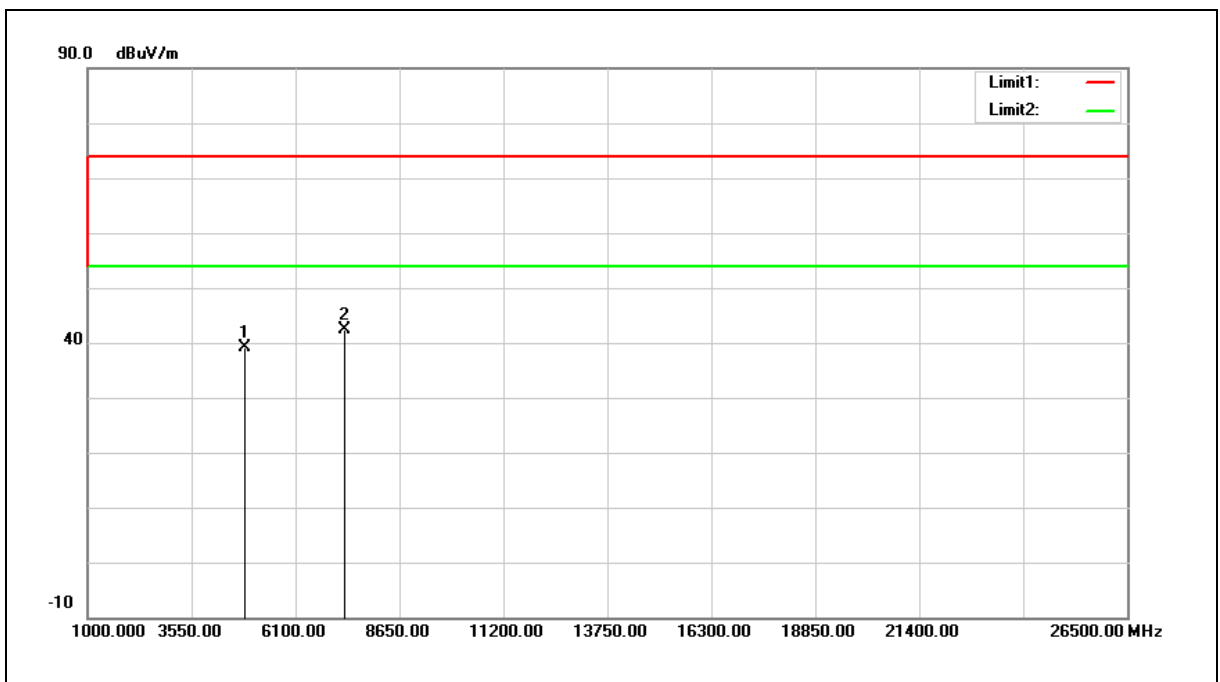


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	40.19	-1.12	39.07	74.00	-34.93	peak
2	7311.000	36.33	6.11	42.44	74.00	-31.56	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

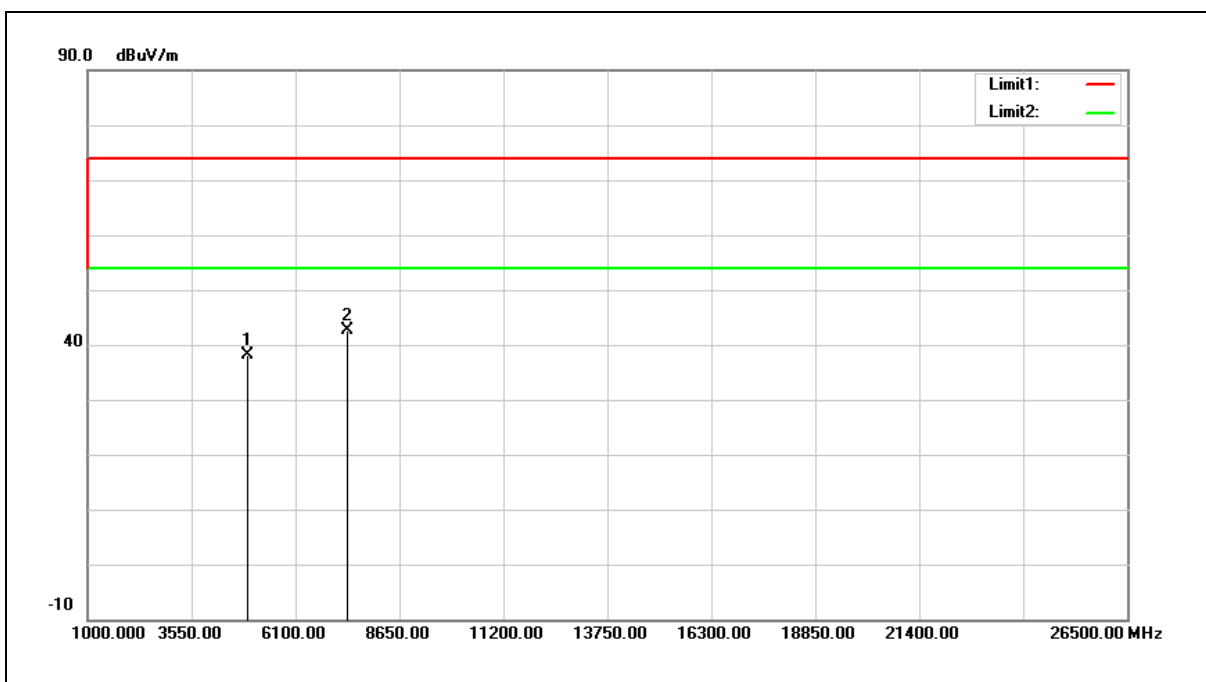


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	39.14	-0.99	38.15	74.00	-35.85	peak
2	7386.000	36.18	6.38	42.56	74.00	-31.44	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

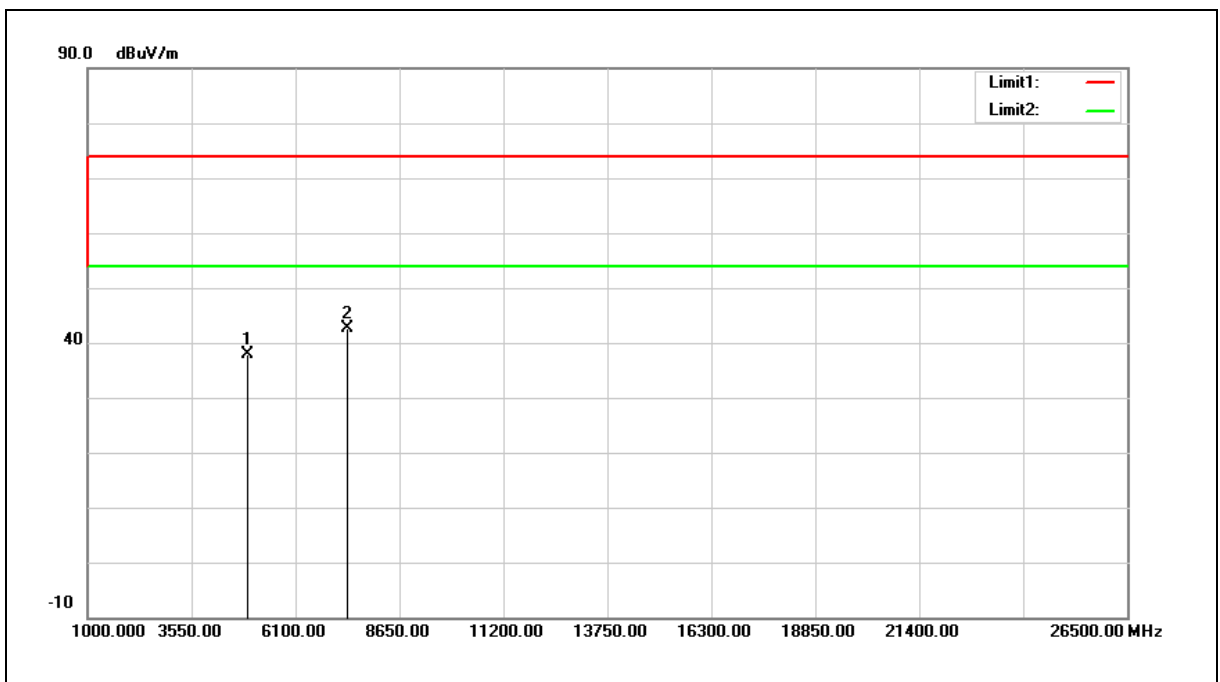


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	38.85	-0.99	37.86	74.00	-36.14	peak
2	7386.000	36.29	6.38	42.67	74.00	-31.33	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

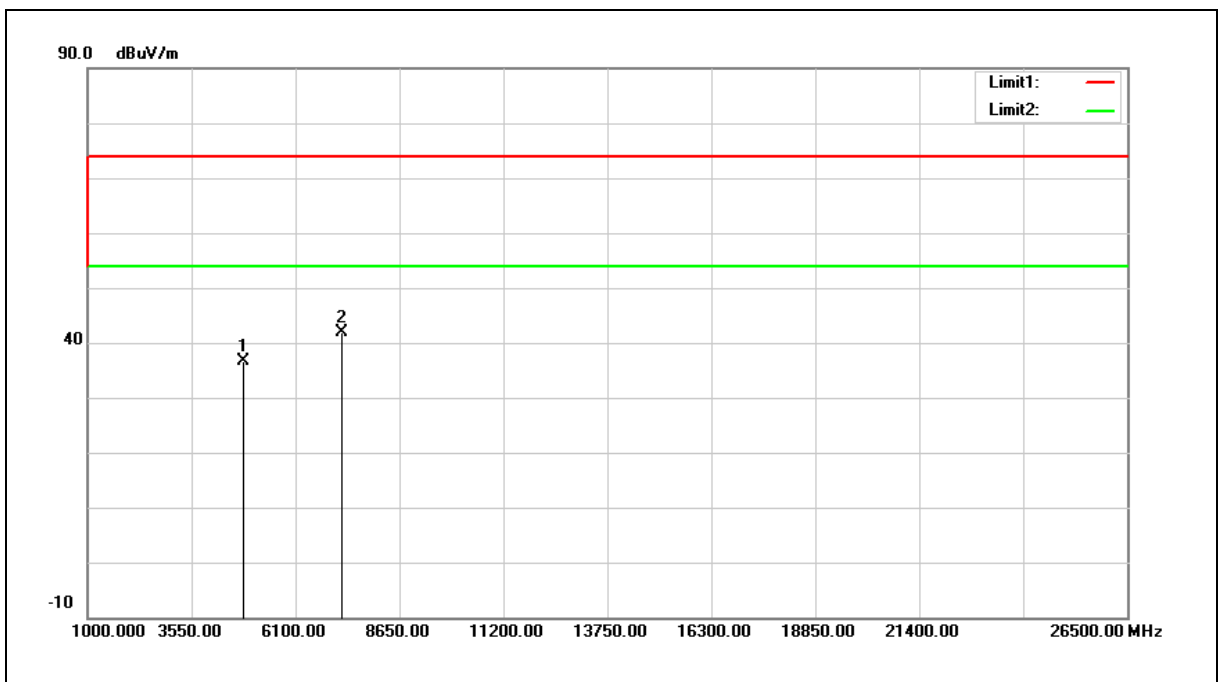


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	37.81	-1.25	36.56	74.00	-37.44	peak
2	7236.000	36.06	5.85	41.91	74.00	-32.09	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

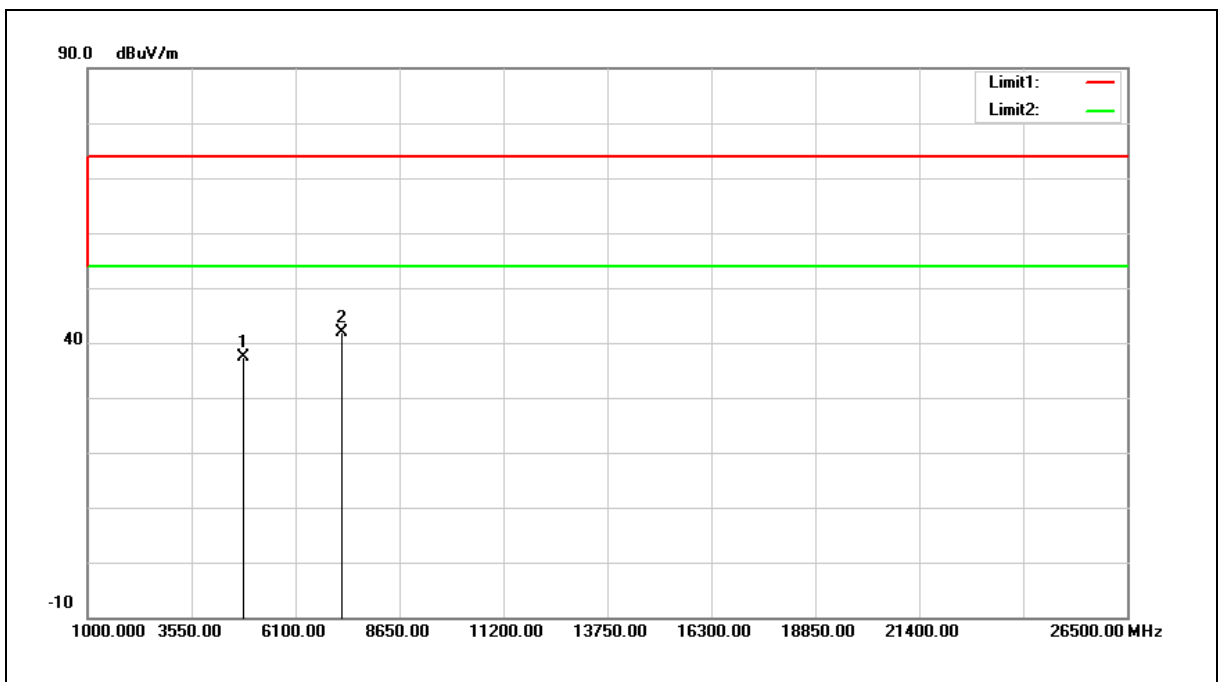


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	38.59	-1.25	37.34	74.00	-36.66	peak
2	7236.000	36.12	5.85	41.97	74.00	-32.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

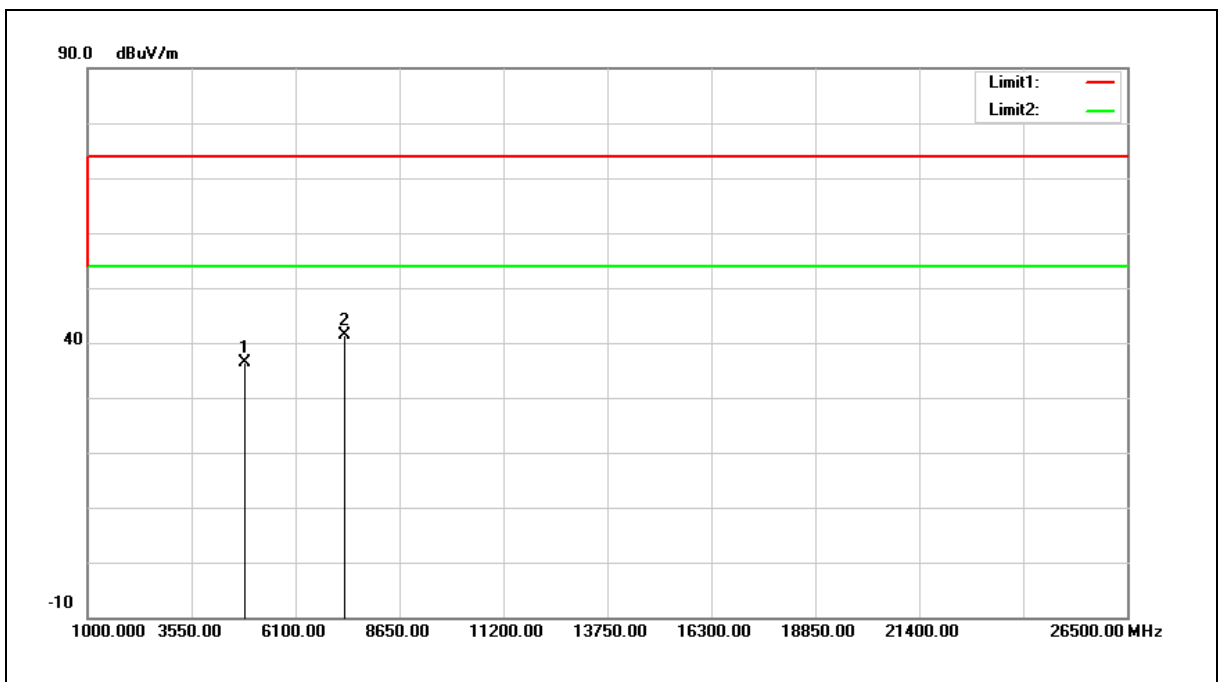


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.56	-1.12	36.44	74.00	-37.56	peak
2	7311.000	35.18	6.11	41.29	74.00	-32.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

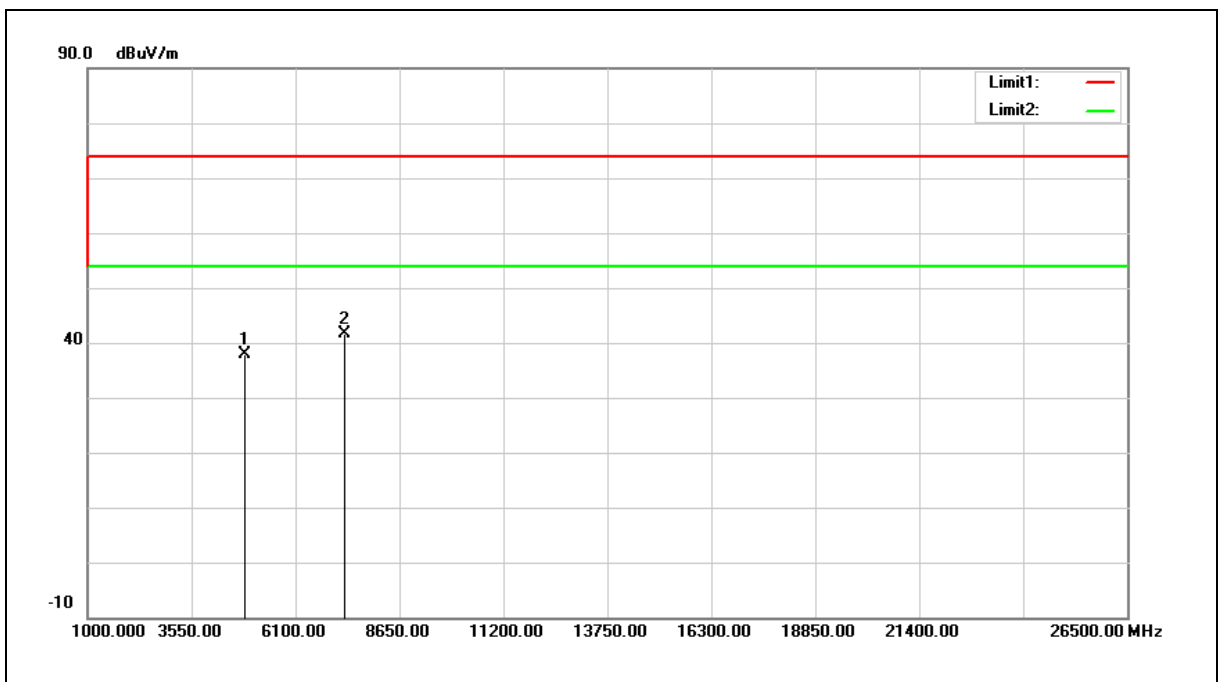


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	38.91	-1.12	37.79	74.00	-36.21	peak
2	7311.000	35.40	6.11	41.51	74.00	-32.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

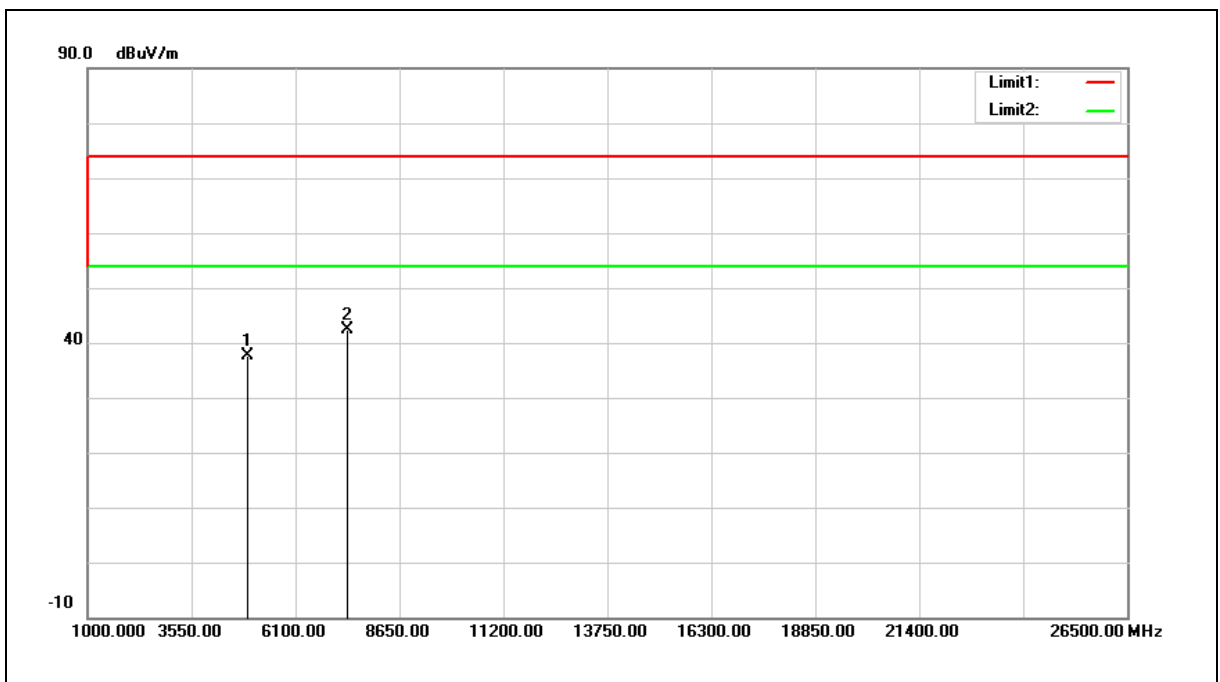


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	38.54	-0.99	37.55	74.00	-36.45	peak
2	7386.000	35.94	6.38	42.32	74.00	-31.68	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

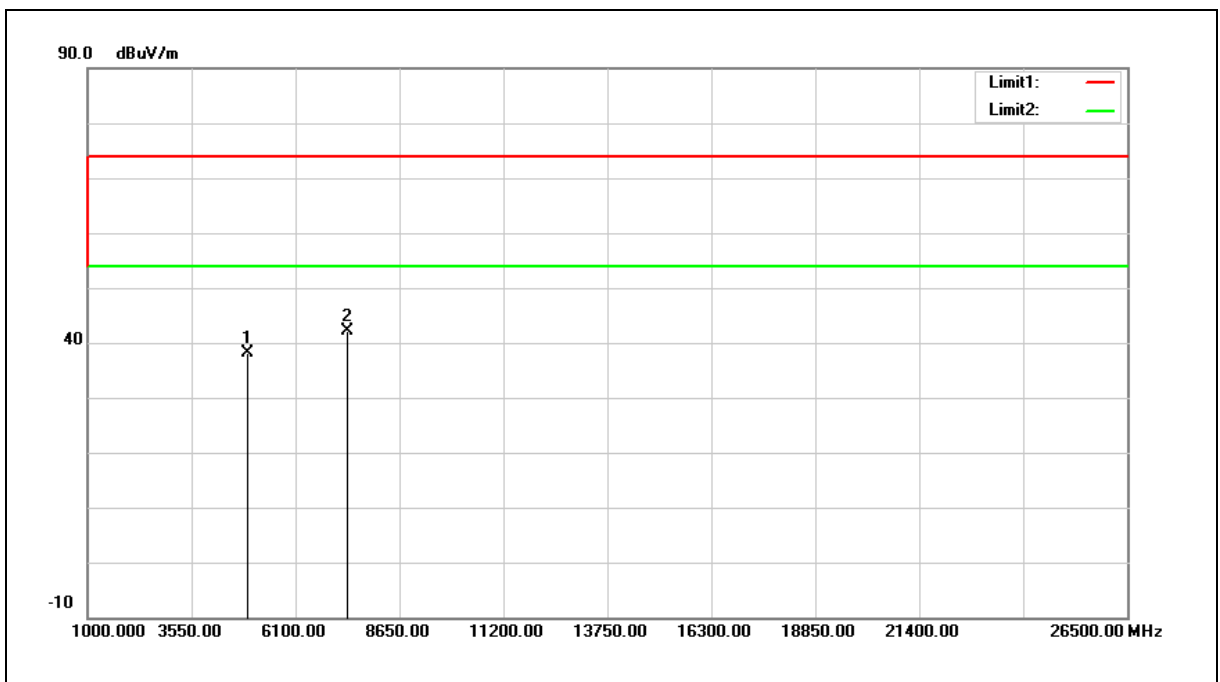


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	39.14	-0.99	38.15	74.00	-35.85	peak
2	7386.000	35.68	6.38	42.06	74.00	-31.94	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2422 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

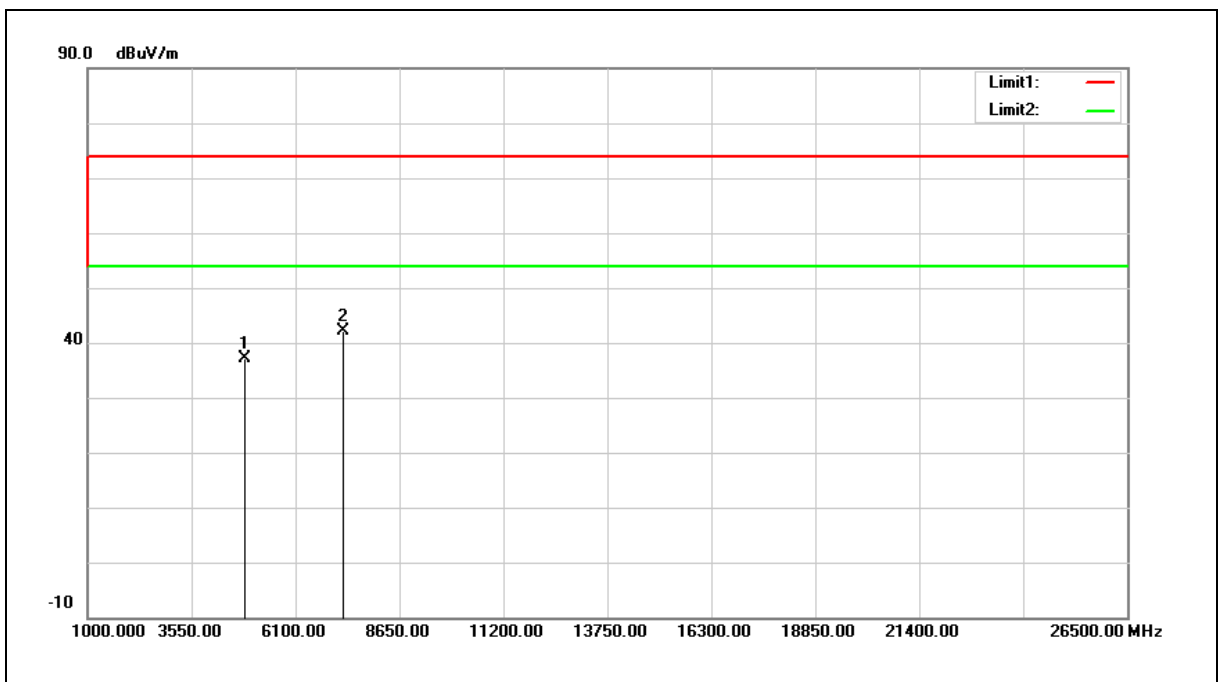


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	38.40	-1.19	37.21	74.00	-36.79	peak
2	7266.000	36.27	5.95	42.22	74.00	-31.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2422 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

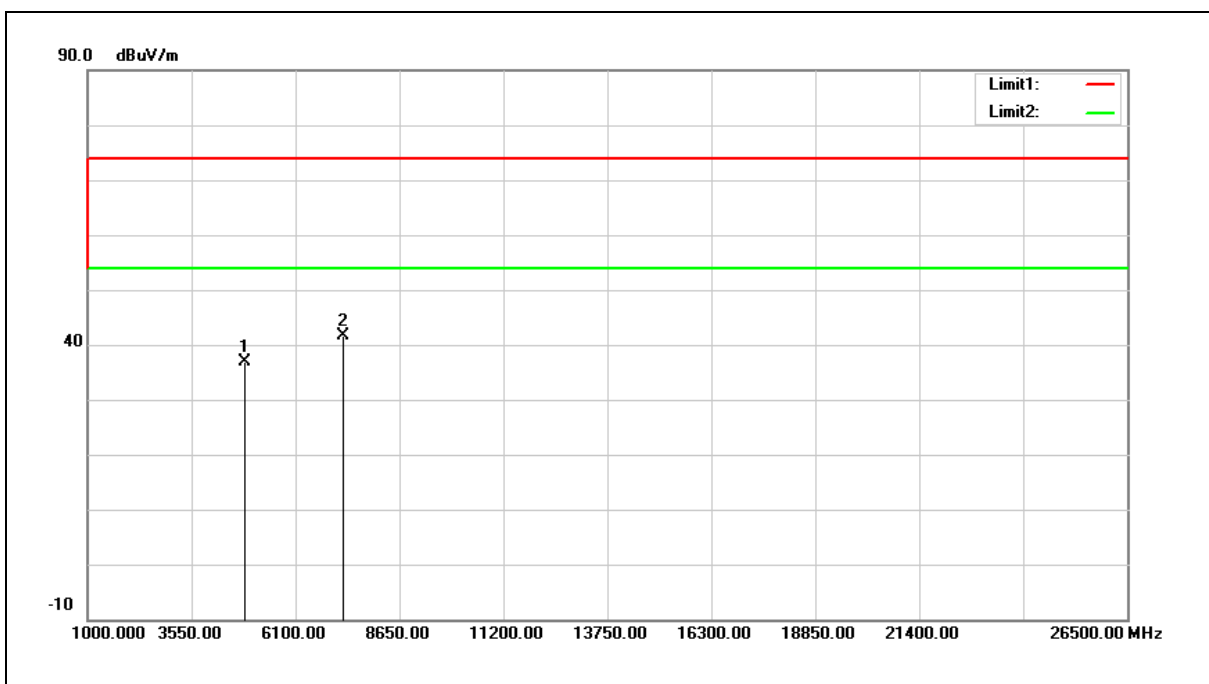


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	38.10	-1.19	36.91	74.00	-37.09	peak
2	7266.000	35.66	5.95	41.61	74.00	-32.39	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

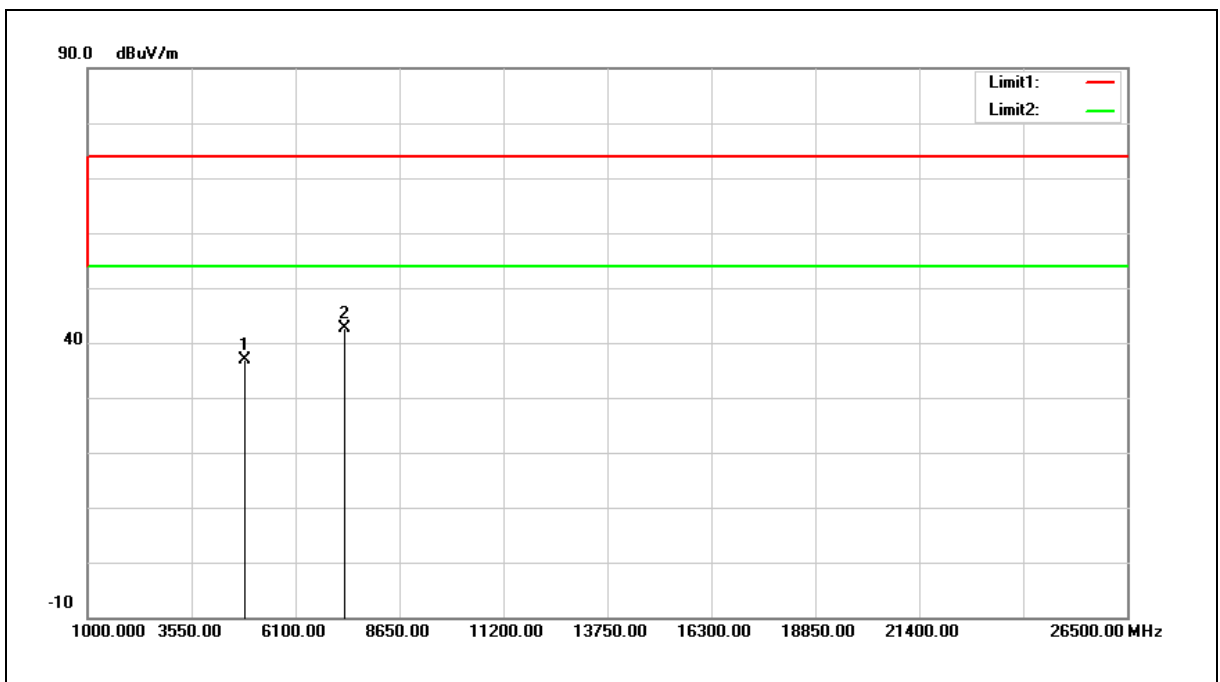


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.96	-1.12	36.84	74.00	-37.16	peak
2	7311.000	36.60	6.11	42.71	74.00	-31.29	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

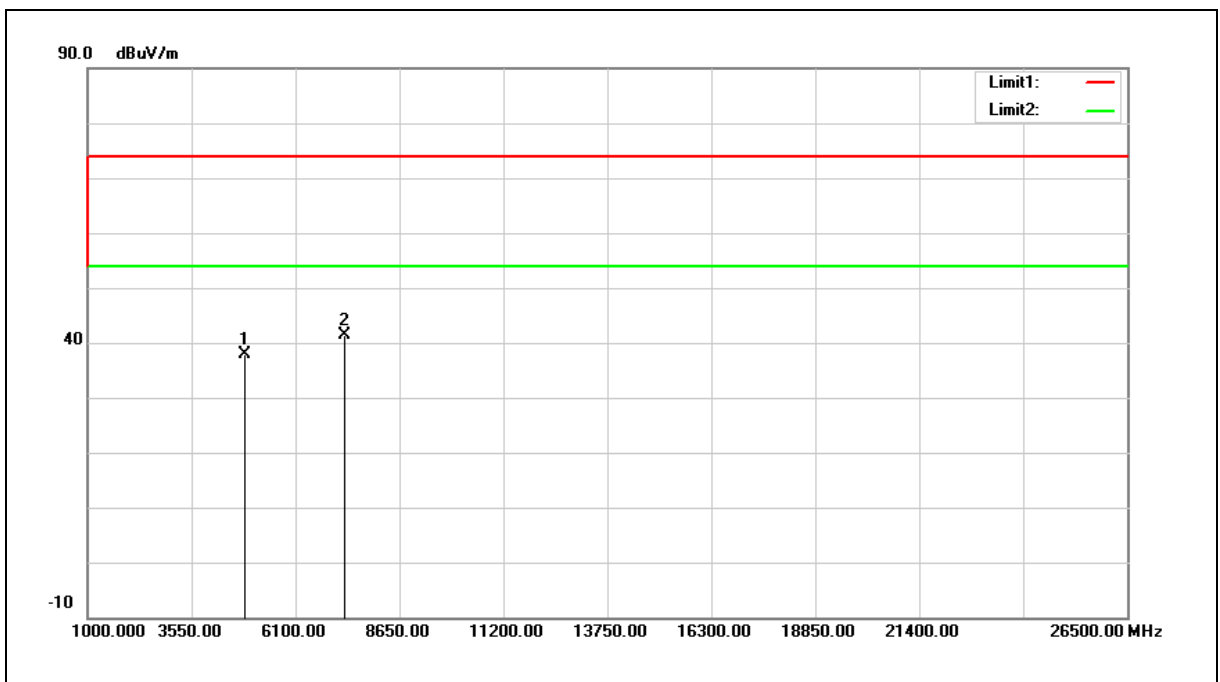


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	38.89	-1.12	37.77	74.00	-36.23	peak
2	7311.000	35.36	6.11	41.47	74.00	-32.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2452 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

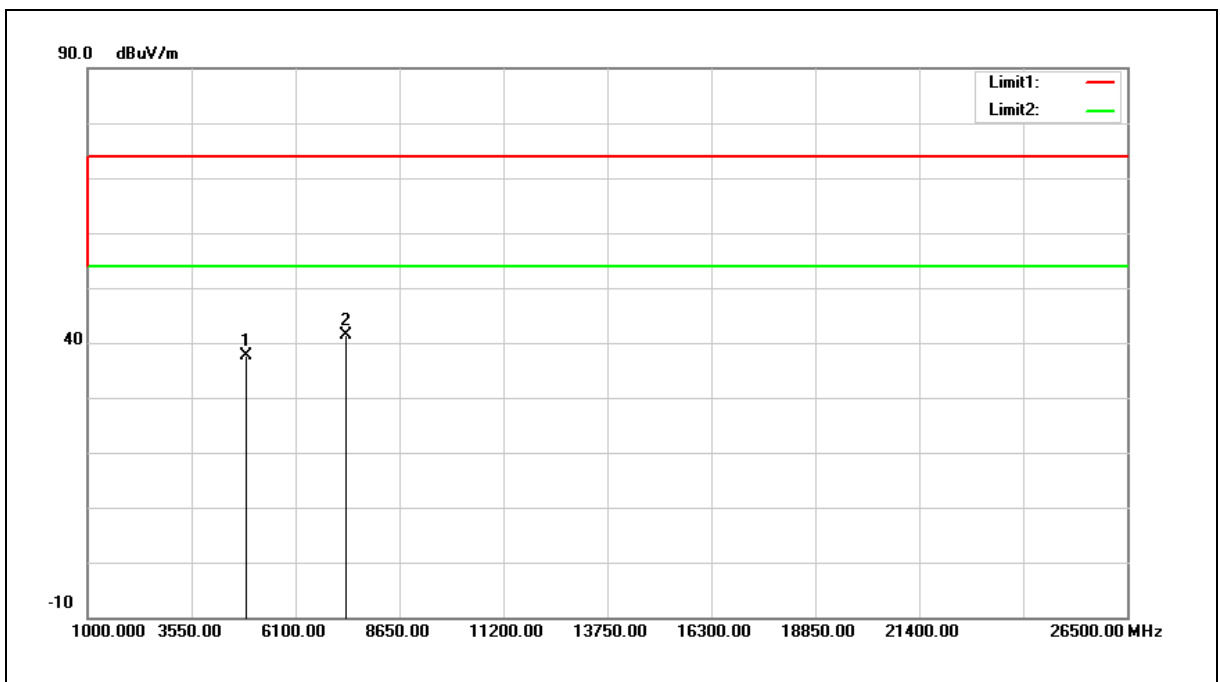


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	38.55	-1.04	37.51	74.00	-36.49	peak
2	7356.000	35.09	6.27	41.36	74.00	-32.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2452 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

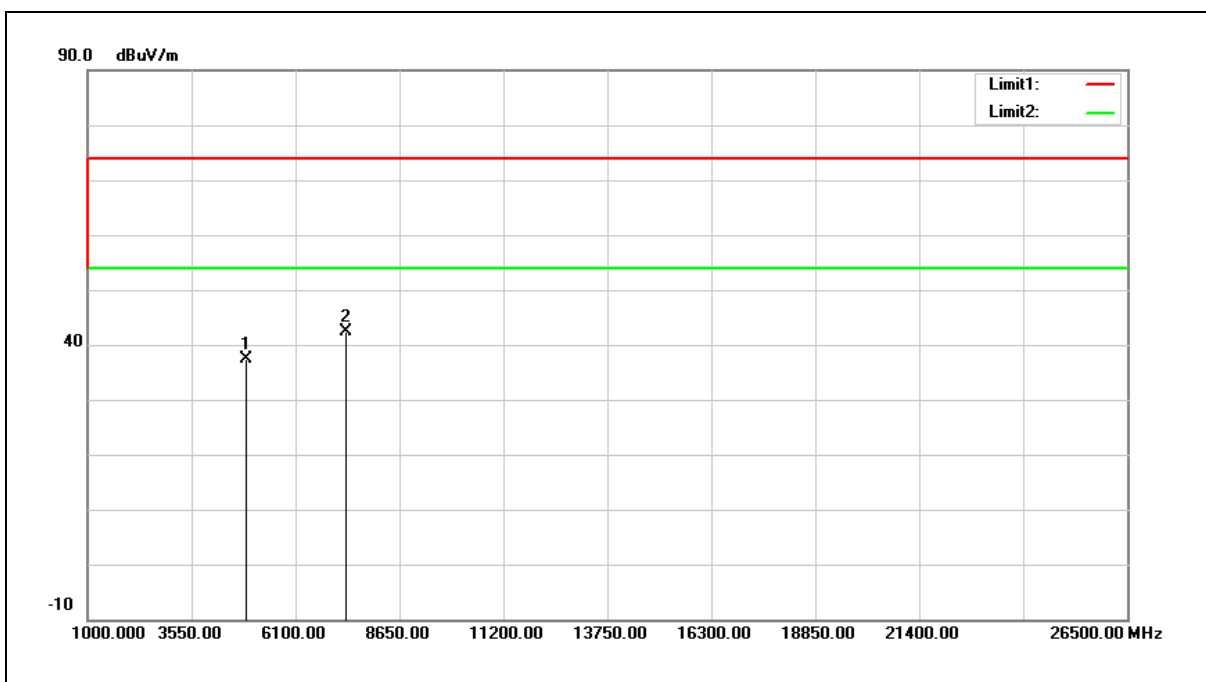


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	38.36	-1.04	37.32	74.00	-36.68	peak
2	7356.000	36.17	6.27	42.44	74.00	-31.56	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting		
	(Bluetooth + WLAN 2.4 GHz)		
Ant.Polar.:	Horizontal		

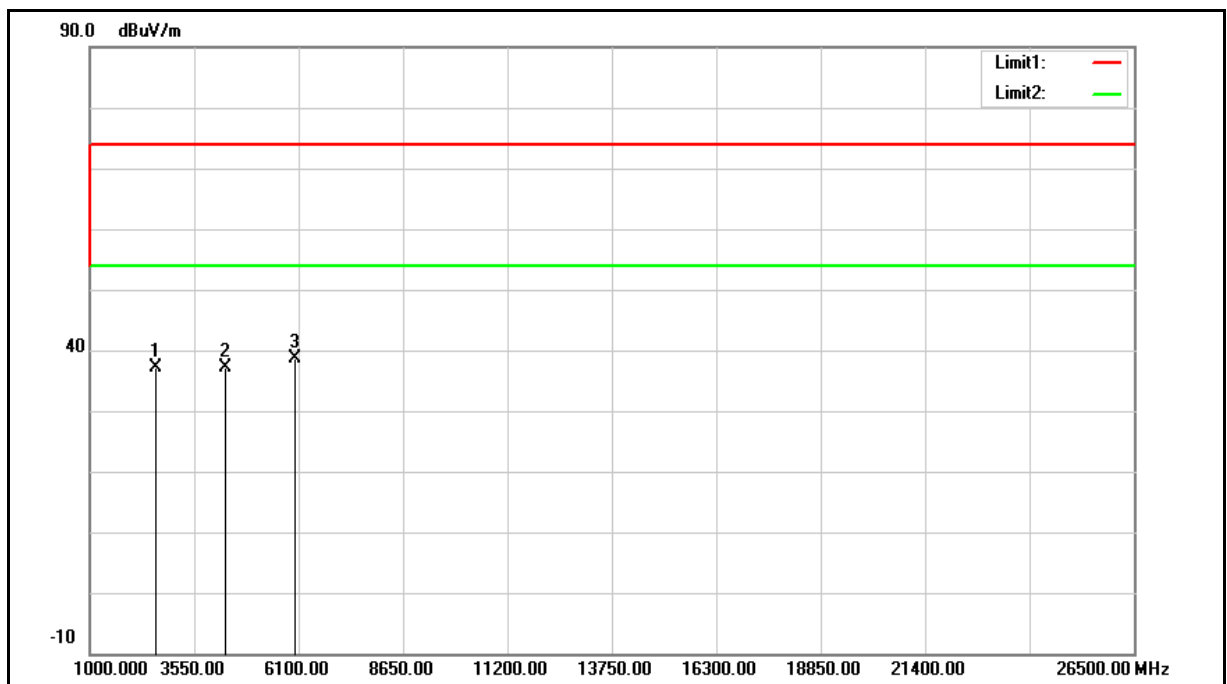


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2602.000	43.98	-6.87	37.11	74.00	-36.89	peak
2	4305.000	39.73	-2.67	37.06	74.00	-36.94	peak
3	6015.000	37.01	1.63	38.64	74.00	-35.36	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting		
	(Bluetooth + WLAN 2.4 GHz)		
Ant.Polar.:	Vertical		

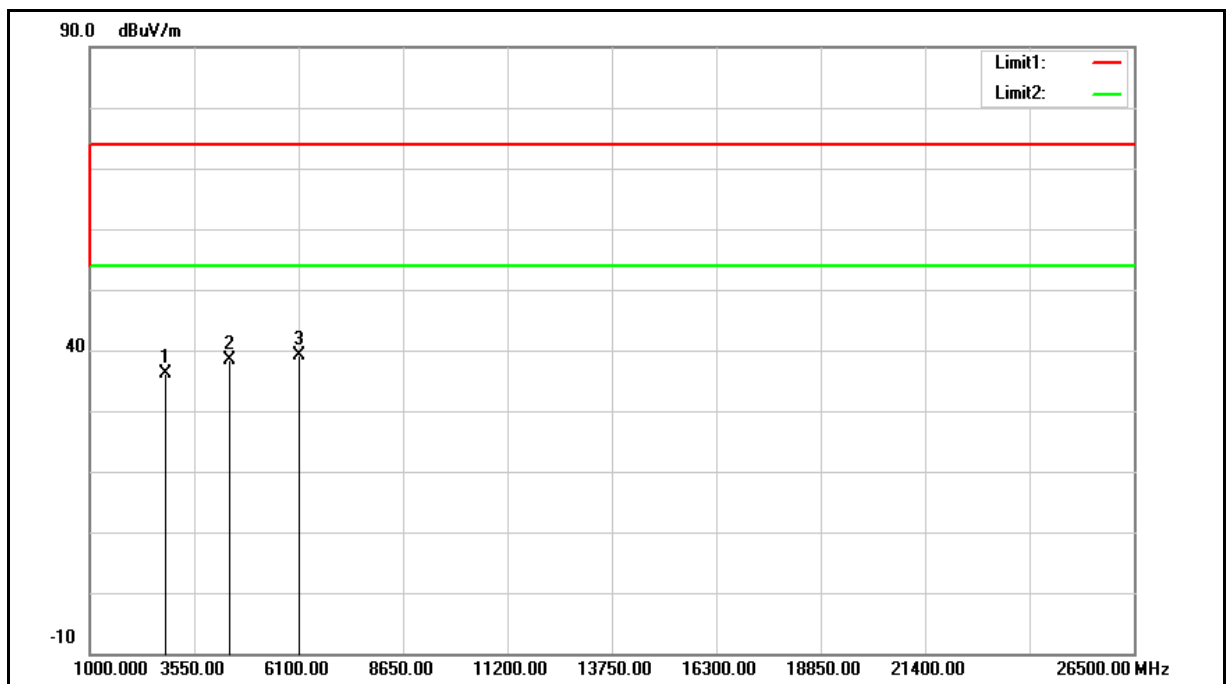


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2853.000	41.95	-5.84	36.11	74.00	-37.89	peak
2	4400.000	40.67	-2.41	38.26	74.00	-35.74	peak
3	6083.000	37.28	1.86	39.14	74.00	-34.86	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		
Description:			

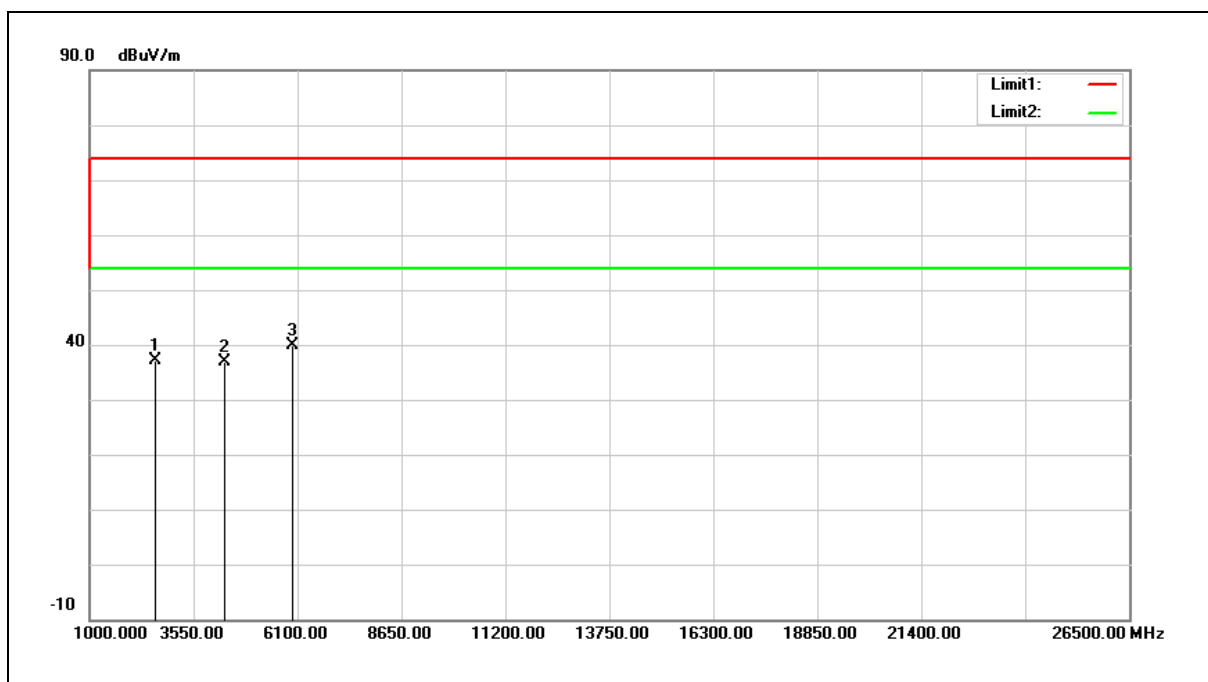


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2598.000	43.93	-6.88	37.05	74.00	-36.95	peak
2	4298.000	39.63	-2.69	36.94	74.00	-37.06	peak
3	5964.000	38.38	1.47	39.85	74.00	-34.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 13		
Ant.Polar.:	Vertical		
Description:			

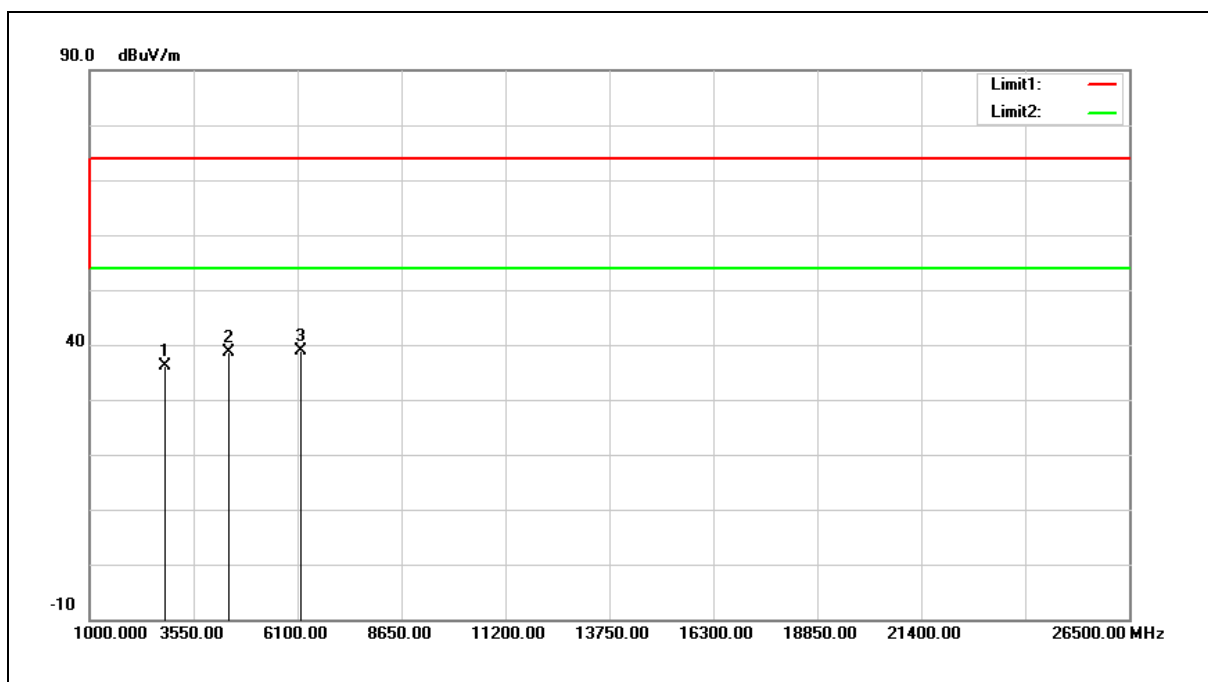

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2853.000	41.88	-5.84	36.04	74.00	-37.96	peak
2	4417.000	40.89	-2.36	38.53	74.00	-35.47	peak
3	6168.000	36.81	2.16	38.97	74.00	-35.03	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

頻帶邊緣

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

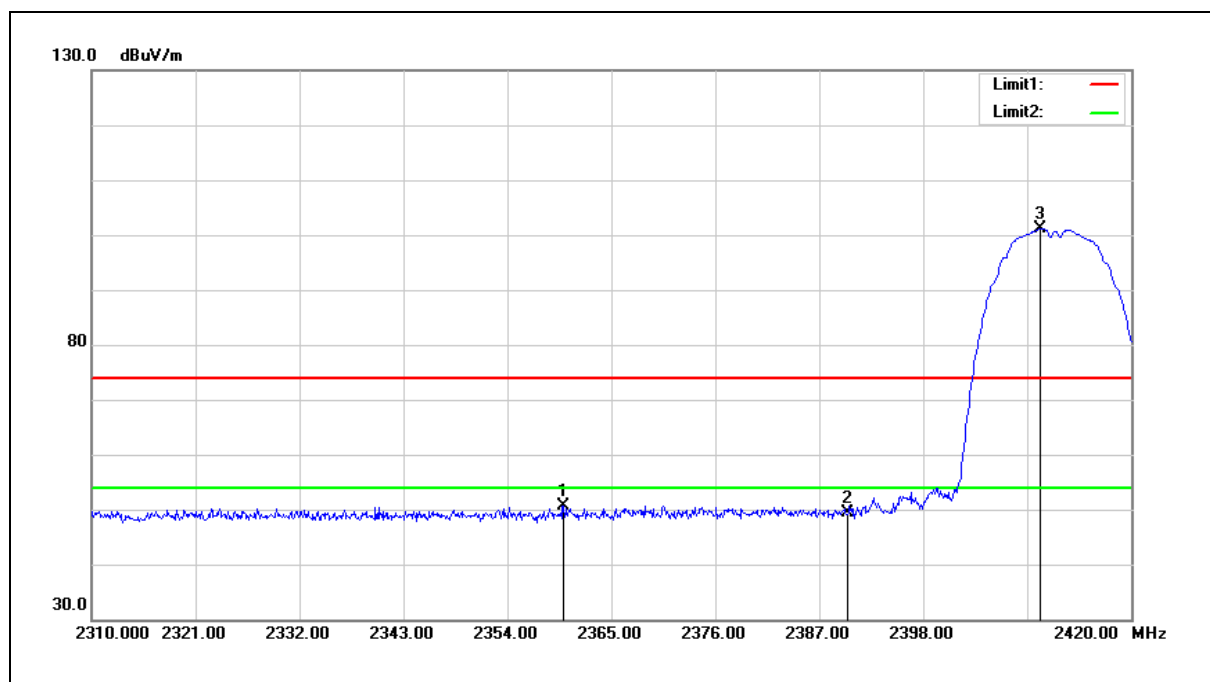


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2359.940	58.52	-7.84	50.68	74.00	-23.32	peak
2	2390.000	57.09	-7.72	49.37	74.00	-24.63	peak
3	2410.430	108.77	-7.64	101.13	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

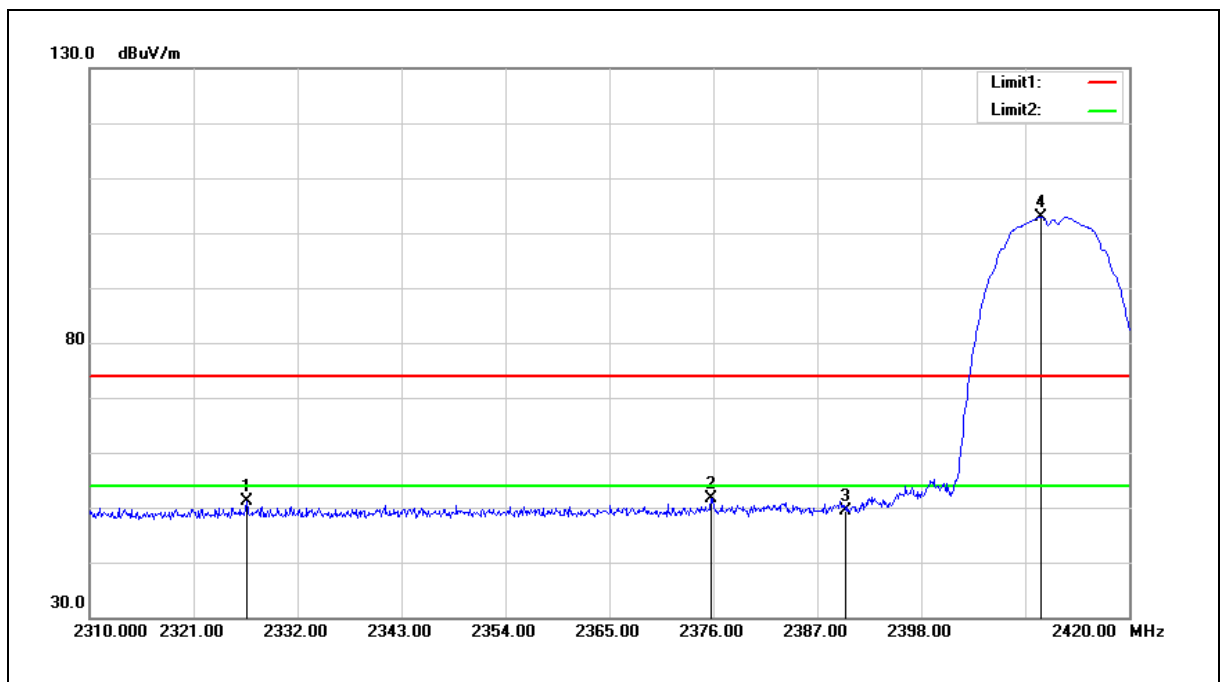


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2326.610	59.05	-7.98	51.07	74.00	-22.93	peak
2	2375.780	59.36	-7.77	51.59	74.00	-22.41	peak
3	2390.000	57.20	-7.72	49.48	74.00	-24.52	peak
4	2410.650	110.49	-7.64	102.85	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

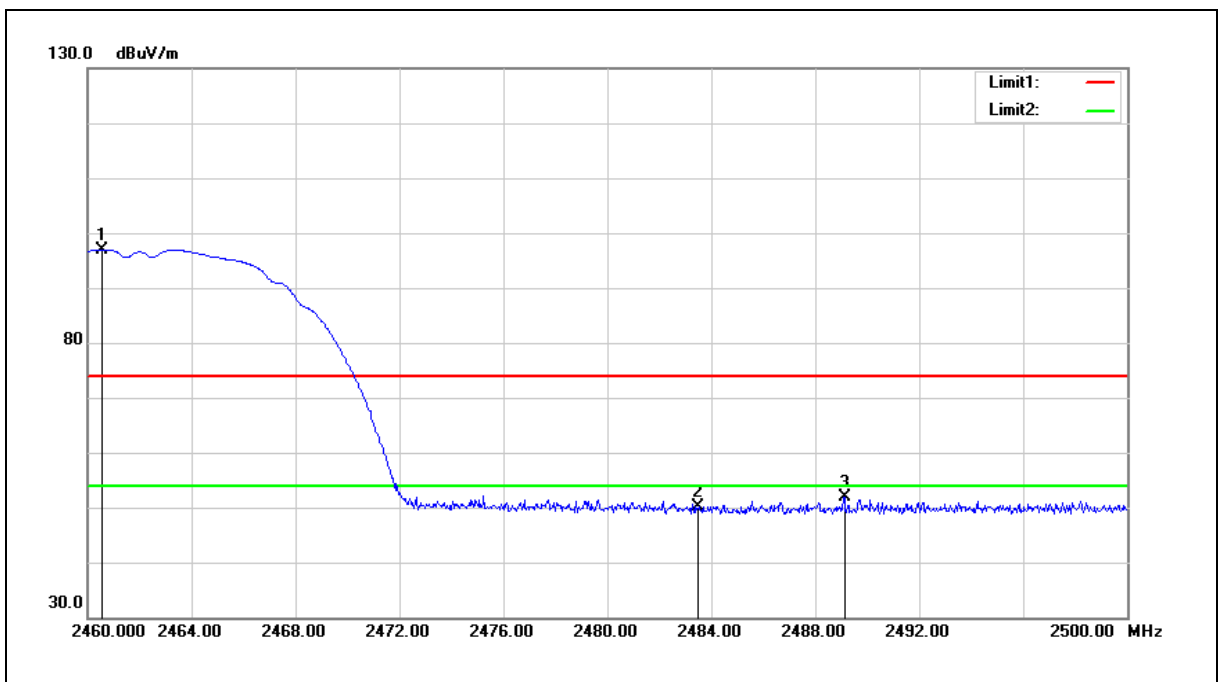


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.560	104.41	-7.43	96.98	--	--	peak
2	2483.500	57.50	-7.34	50.16	74.00	-23.84	peak
3	2489.120	59.18	-7.31	51.87	74.00	-22.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

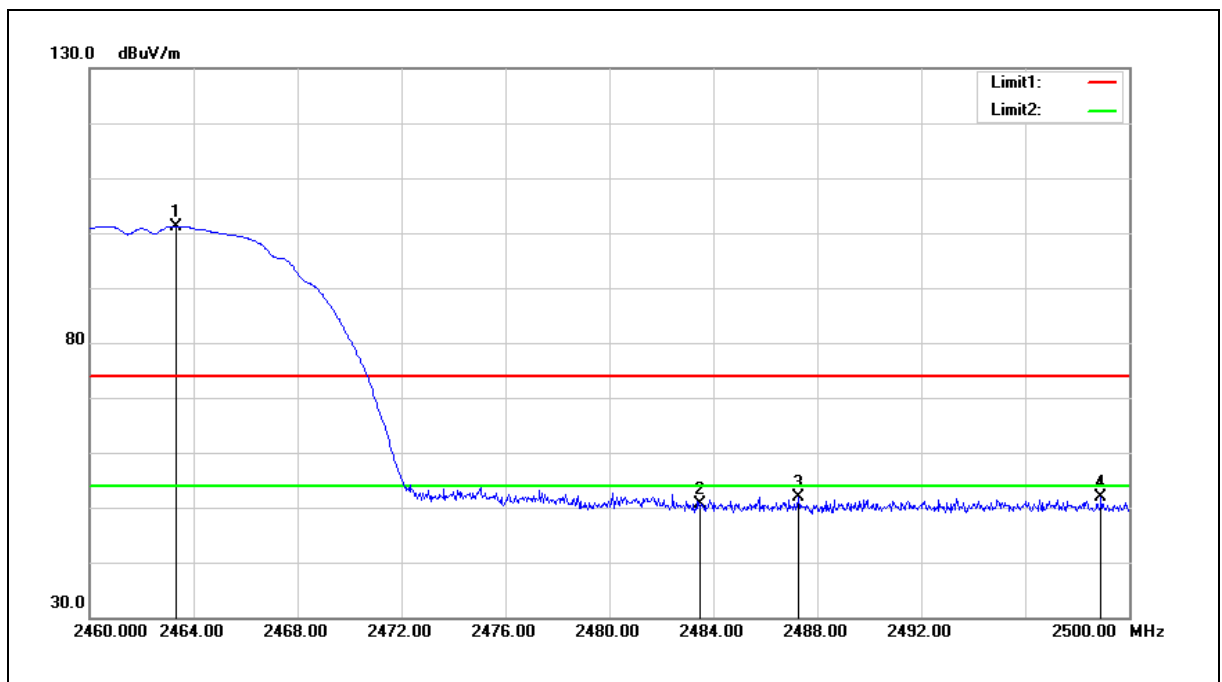


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.320	108.63	-7.42	101.21	--	--	peak
2	2483.500	57.90	-7.34	50.56	74.00	-23.44	peak
3	2487.280	59.26	-7.32	51.94	74.00	-22.06	peak
4	2498.920	59.03	-7.27	51.76	74.00	-22.24	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

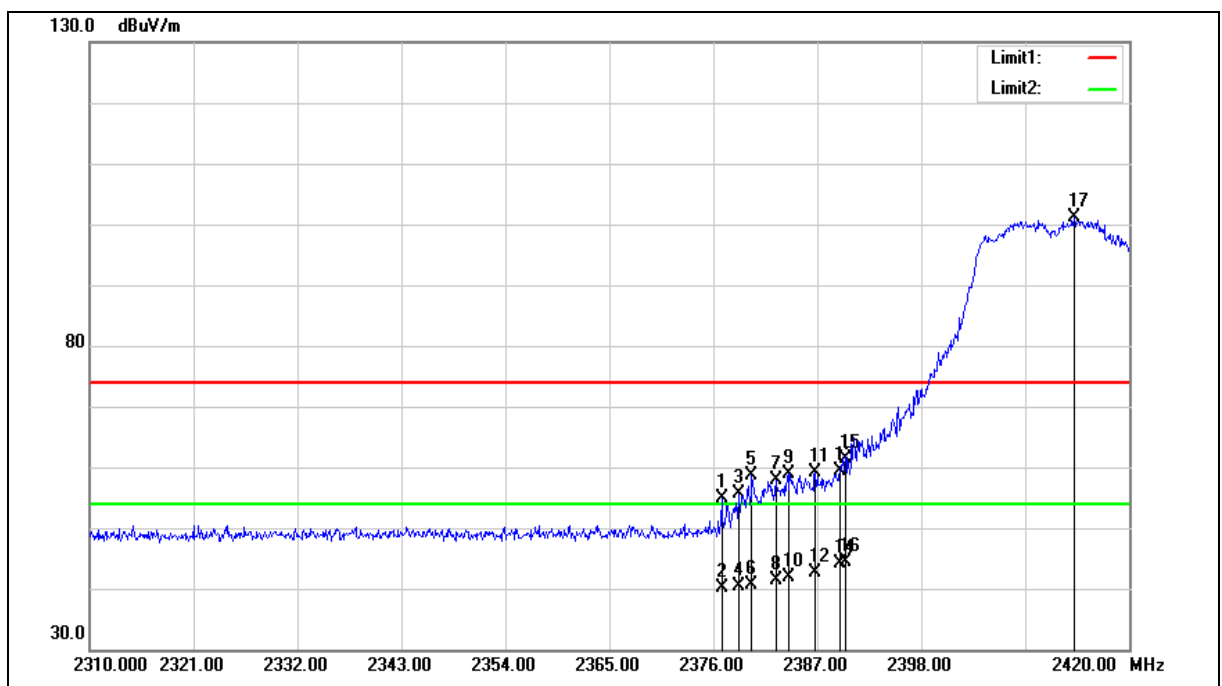

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2376.880	62.70	-7.77	54.93	74.00	-19.07	peak
2	2376.880	47.82	-7.77	40.05	54.00	-13.95	AVG
3	2378.750	63.38	-7.76	55.62	74.00	-18.38	peak
4	2378.750	48.23	-7.76	40.47	54.00	-13.53	AVG
5	2380.070	66.41	-7.76	58.65	74.00	-15.35	peak
6	2380.070	48.46	-7.76	40.70	54.00	-13.30	AVG
7	2382.600	65.68	-7.75	57.93	74.00	-16.07	peak
8	2382.600	49.25	-7.75	41.50	54.00	-12.50	AVG
9	2383.920	66.61	-7.75	58.86	74.00	-15.14	peak
10	2383.920	49.68	-7.75	41.93	54.00	-12.07	AVG
11	2386.780	66.97	-7.73	59.24	74.00	-14.76	peak
12	2386.780	50.36	-7.73	42.63	54.00	-11.37	AVG
13	2389.420	67.16	-7.72	59.44	74.00	-14.56	peak
14	2389.420	51.88	-7.72	44.16	54.00	-9.84	AVG
15	2390.000	69.02	-7.72	61.30	74.00	-12.70	peak
16	2390.000	52.21	-7.72	44.49	54.00	-9.51	AVG
17	2414.170	108.84	-7.62	101.22	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

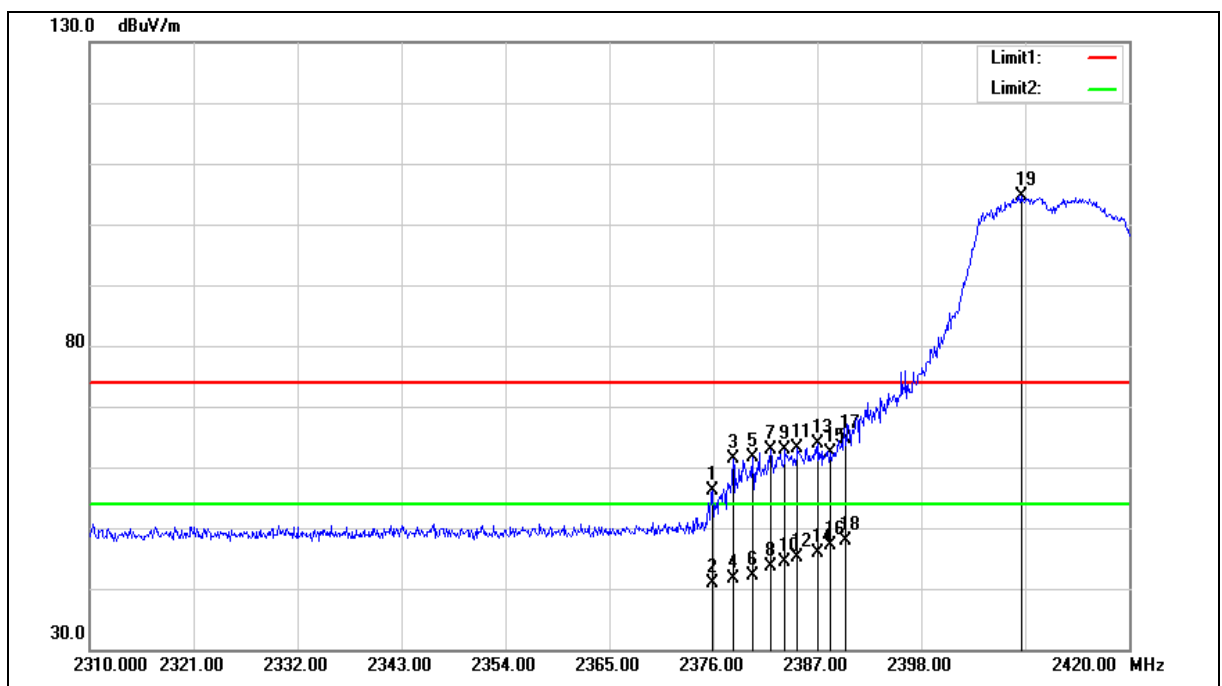

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2375.890	63.79	-7.77	56.02	74.00	-17.98	peak
2	2375.890	48.71	-7.77	40.94	54.00	-13.06	AVG
3	2378.090	69.08	-7.77	61.31	74.00	-12.69	peak
4	2378.090	49.41	-7.77	41.64	54.00	-12.36	AVG
5	2380.180	69.45	-7.76	61.69	74.00	-12.31	peak
6	2380.180	49.87	-7.76	42.11	54.00	-11.89	AVG
7	2382.050	70.71	-7.75	62.96	74.00	-11.04	peak
8	2382.050	51.30	-7.75	43.55	54.00	-10.45	AVG
9	2383.590	70.63	-7.75	62.88	74.00	-11.12	peak
10	2383.590	52.08	-7.75	44.33	54.00	-9.67	AVG
11	2384.910	70.95	-7.75	63.20	74.00	-10.80	peak
12	2384.910	53.00	-7.75	45.25	54.00	-8.75	AVG
13	2387.110	71.53	-7.73	63.80	74.00	-10.20	peak
14	2387.110	53.50	-7.73	45.77	54.00	-8.23	AVG
15	2388.430	70.20	-7.72	62.48	74.00	-11.52	peak
16	2388.430	54.77	-7.72	47.05	54.00	-6.95	AVG
17	2390.000	72.29	-7.72	64.57	74.00	-9.43	peak
18	2390.000	55.53	-7.72	47.81	54.00	-6.19	AVG
19	2408.560	112.25	-7.64	104.61	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

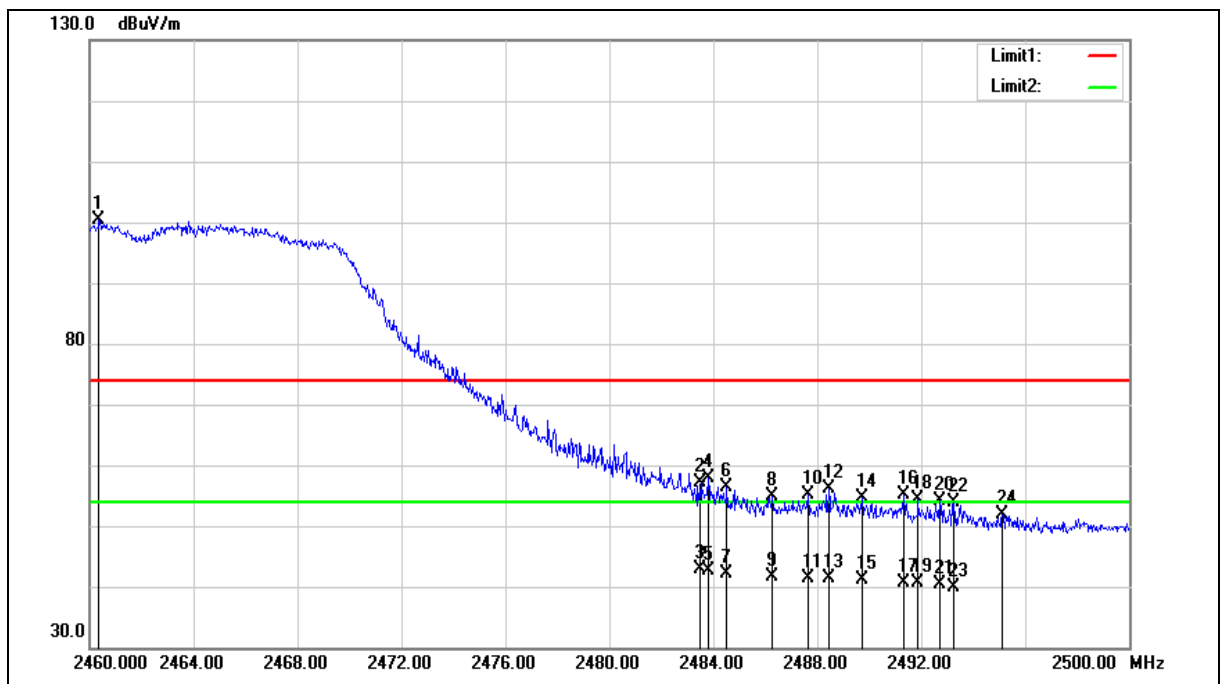

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.360	107.90	-7.43	100.47	--	--	peak
2	2483.500	64.56	-7.34	57.22	74.00	-16.78	peak
3	2483.500	50.21	-7.34	42.87	54.00	-11.13	AVG
4	2483.800	65.24	-7.34	57.90	74.00	-16.10	peak
5	2483.800	50.02	-7.34	42.68	54.00	-11.32	AVG
6	2484.520	63.83	-7.34	56.49	74.00	-17.51	peak
7	2484.520	49.56	-7.34	42.22	54.00	-11.78	AVG
8	2486.280	62.24	-7.32	54.92	74.00	-19.08	peak
9	2486.280	49.03	-7.32	41.71	54.00	-12.29	AVG
10	2487.640	62.39	-7.32	55.07	74.00	-18.93	peak
11	2487.640	48.73	-7.32	41.41	54.00	-12.59	AVG
12	2488.440	63.35	-7.31	56.04	74.00	-17.96	peak
13	2488.440	48.71	-7.31	41.40	54.00	-12.60	AVG
14	2489.720	61.83	-7.31	54.52	74.00	-19.48	peak
15	2489.720	48.36	-7.31	41.05	54.00	-12.95	AVG
16	2491.320	62.41	-7.31	55.10	74.00	-18.90	peak
17	2491.320	48.05	-7.31	40.74	54.00	-13.26	AVG
18	2491.880	61.56	-7.30	54.26	74.00	-19.74	peak
19	2491.880	47.81	-7.30	40.51	54.00	-13.49	AVG
20	2492.720	61.35	-7.30	54.05	74.00	-19.95	peak
21	2492.720	47.59	-7.30	40.29	54.00	-13.71	AVG
22	2493.240	61.10	-7.30	53.80	74.00	-20.20	peak
23	2493.240	47.30	-7.30	40.00	54.00	-14.00	AVG
24	2495.120	59.15	-7.28	51.87	74.00	-22.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

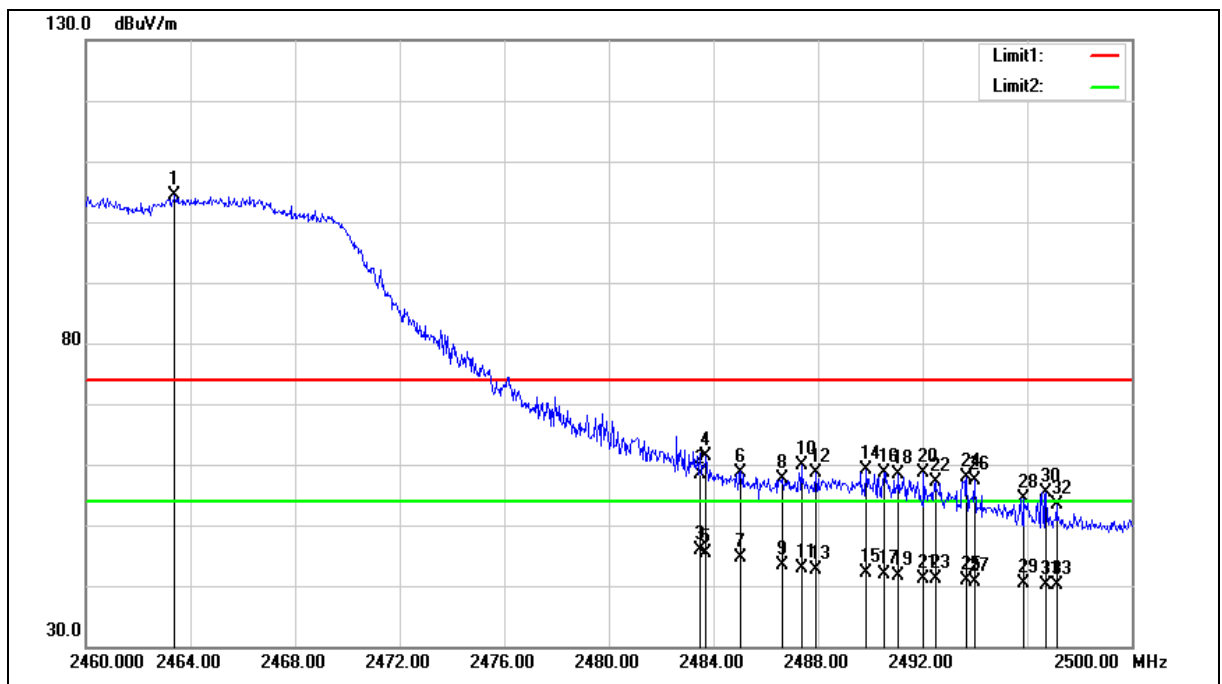

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.400	111.74	-7.42	104.32	--	--	peak
2	2483.500	65.62	-7.34	58.28	74.00	-15.72	peak
3	2483.500	53.12	-7.34	45.78	54.00	-8.22	AVG
4	2483.720	68.70	-7.34	61.36	74.00	-12.64	peak
5	2483.720	52.81	-7.34	45.47	54.00	-8.53	AVG
6	2485.040	66.08	-7.33	58.75	74.00	-15.25	peak
7	2485.040	51.95	-7.33	44.62	54.00	-9.38	AVG
8	2486.640	64.95	-7.32	57.63	74.00	-16.37	peak
9	2486.640	50.67	-7.32	43.35	54.00	-10.65	AVG
10	2487.360	67.31	-7.32	59.99	74.00	-14.01	peak
11	2487.360	50.23	-7.32	42.91	54.00	-11.09	AVG
12	2487.920	66.03	-7.32	58.71	74.00	-15.29	peak
13	2487.920	49.87	-7.32	42.55	54.00	-11.45	AVG
14	2489.840	66.36	-7.31	59.05	74.00	-14.95	peak
15	2489.840	49.47	-7.31	42.16	54.00	-11.84	AVG
16	2490.520	65.88	-7.31	58.57	74.00	-15.43	peak
17	2490.520	49.08	-7.31	41.77	54.00	-12.23	AVG
18	2491.080	65.78	-7.31	58.47	74.00	-15.53	peak
19	2491.080	49.02	-7.31	41.71	54.00	-12.29	AVG
20	2492.040	65.83	-7.30	58.53	74.00	-15.47	peak
21	2492.040	48.51	-7.30	41.21	54.00	-12.79	AVG
22	2492.480	64.48	-7.30	57.18	74.00	-16.82	peak
23	2492.480	48.40	-7.30	41.10	54.00	-12.90	AVG
24	2493.680	65.25	-7.29	57.96	74.00	-16.04	peak
25	2493.680	48.21	-7.29	40.92	54.00	-13.08	AVG
26	2494.000	64.72	-7.29	57.43	74.00	-16.57	peak
27	2494.000	47.91	-7.29	40.62	54.00	-13.38	AVG

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
28	2495.880	61.68	-7.28	54.40	74.00	-19.60	peak
29	2495.880	47.76	-7.28	40.48	54.00	-13.52	AVG
30	2496.720	62.56	-7.28	55.28	74.00	-18.72	peak
31	2496.720	47.45	-7.28	40.17	54.00	-13.83	AVG
32	2497.120	60.60	-7.28	53.32	74.00	-20.68	peak
33	2497.120	47.36	-7.28	40.08	54.00	-13.92	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

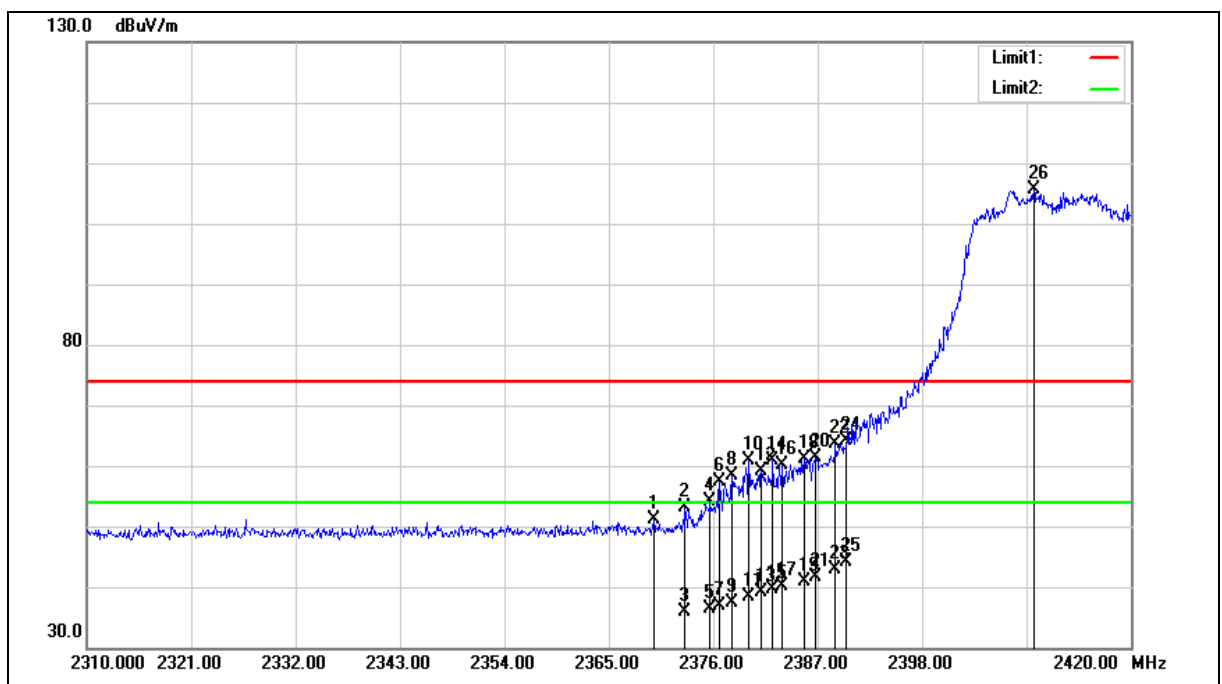

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2369.730	58.86	-7.80	51.06	74.00	-22.94	peak
2	2373.030	60.94	-7.78	53.16	74.00	-20.84	peak
3	2373.030	43.54	-7.78	35.76	54.00	-18.24	AVG
4	2375.670	61.90	-7.77	54.13	74.00	-19.87	peak
5	2375.670	44.26	-7.77	36.49	54.00	-17.51	AVG
6	2376.660	65.17	-7.77	57.40	74.00	-16.60	peak
7	2376.660	44.64	-7.77	36.87	54.00	-17.13	AVG
8	2377.980	66.18	-7.77	58.41	74.00	-15.59	peak
9	2377.980	45.27	-7.77	37.50	54.00	-16.50	AVG
10	2379.740	68.64	-7.76	60.88	74.00	-13.12	peak
11	2379.740	46.13	-7.76	38.37	54.00	-15.63	AVG
12	2381.060	66.85	-7.76	59.09	74.00	-14.91	peak
13	2381.060	46.80	-7.76	39.04	54.00	-14.96	AVG
14	2382.270	68.51	-7.75	60.76	74.00	-13.24	peak
15	2382.270	47.37	-7.75	39.62	54.00	-14.38	AVG
16	2383.260	67.96	-7.75	60.21	74.00	-13.79	peak
17	2383.260	47.81	-7.75	40.06	54.00	-13.94	AVG
18	2385.570	68.98	-7.73	61.25	74.00	-12.75	peak
19	2385.570	48.66	-7.73	40.93	54.00	-13.07	AVG
20	2386.780	69.20	-7.73	61.47	74.00	-12.53	peak
21	2386.780	49.48	-7.73	41.75	54.00	-12.25	AVG
22	2388.870	71.42	-7.72	63.70	74.00	-10.30	peak
23	2388.870	50.67	-7.72	42.95	54.00	-11.05	AVG
24	2390.000	71.78	-7.72	64.06	74.00	-9.94	peak
25	2390.000	51.75	-7.72	44.03	54.00	-9.97	AVG

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
26	2409.770	113.16	-7.64	105.52	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

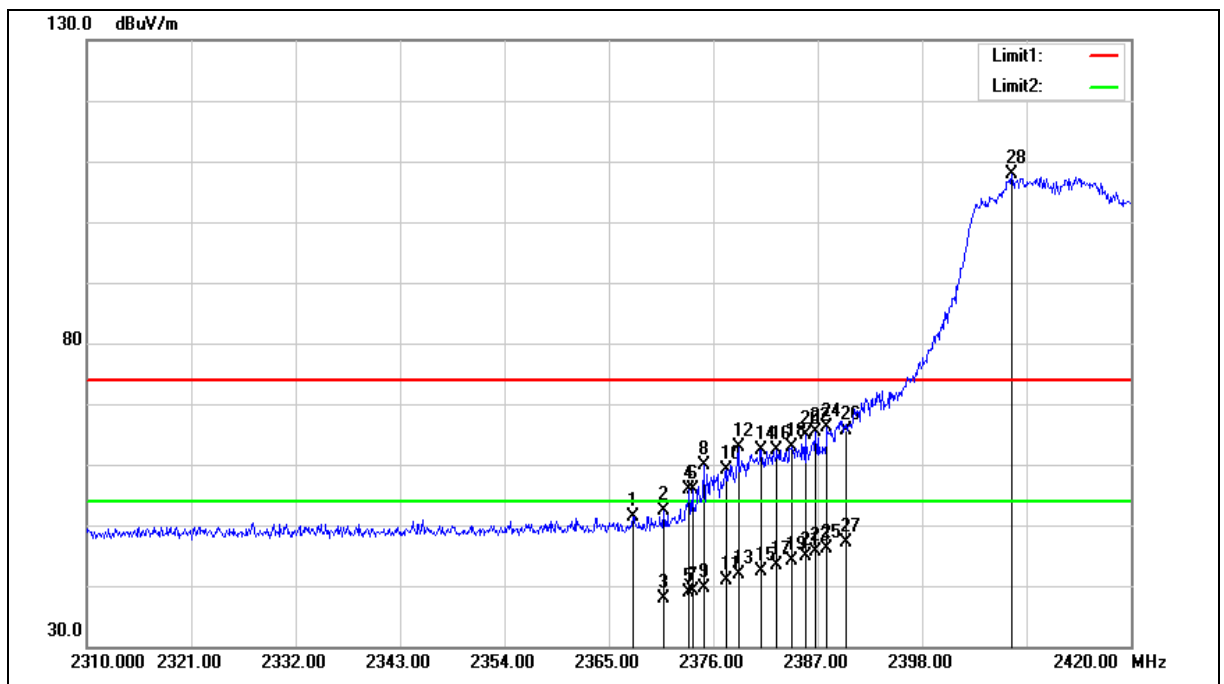

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2367.530	59.20	-7.82	51.38	74.00	-22.62	peak
2	2370.720	60.21	-7.80	52.41	74.00	-21.59	peak
3	2370.720	45.71	-7.80	37.91	54.00	-16.09	AVG
4	2373.470	63.59	-7.78	55.81	74.00	-18.19	peak
5	2373.470	46.58	-7.78	38.80	54.00	-15.20	AVG
6	2373.800	63.74	-7.78	55.96	74.00	-18.04	peak
7	2373.800	46.79	-7.78	39.01	54.00	-14.99	AVG
8	2375.010	67.73	-7.77	59.96	74.00	-14.04	peak
9	2375.010	47.35	-7.77	39.58	54.00	-14.42	AVG
10	2377.320	66.79	-7.77	59.02	74.00	-14.98	peak
11	2377.320	48.66	-7.77	40.89	54.00	-13.11	AVG
12	2378.640	70.65	-7.76	62.89	74.00	-11.11	peak
13	2378.640	49.62	-7.76	41.86	54.00	-12.14	AVG
14	2381.060	70.23	-7.76	62.47	74.00	-11.53	peak
15	2381.060	50.26	-7.76	42.50	54.00	-11.50	AVG
16	2382.710	70.23	-7.75	62.48	74.00	-11.52	peak
17	2382.710	51.10	-7.75	43.35	54.00	-10.65	AVG
18	2384.250	70.60	-7.75	62.85	74.00	-11.15	peak
19	2384.250	51.86	-7.75	44.11	54.00	-9.89	AVG
20	2385.680	72.71	-7.73	64.98	74.00	-9.02	peak
21	2385.680	52.63	-7.73	44.90	54.00	-9.10	AVG
22	2386.780	72.99	-7.73	65.26	74.00	-8.74	peak
23	2386.780	53.38	-7.73	45.65	54.00	-8.35	AVG
24	2387.990	73.93	-7.73	66.20	74.00	-7.80	peak
25	2387.990	53.97	-7.73	46.24	54.00	-7.76	AVG
26	2390.000	73.24	-7.72	65.52	74.00	-8.48	peak
27	2390.000	54.91	-7.72	47.19	54.00	-6.81	AVG

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
28	2407.460	115.47	-7.65	107.82	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

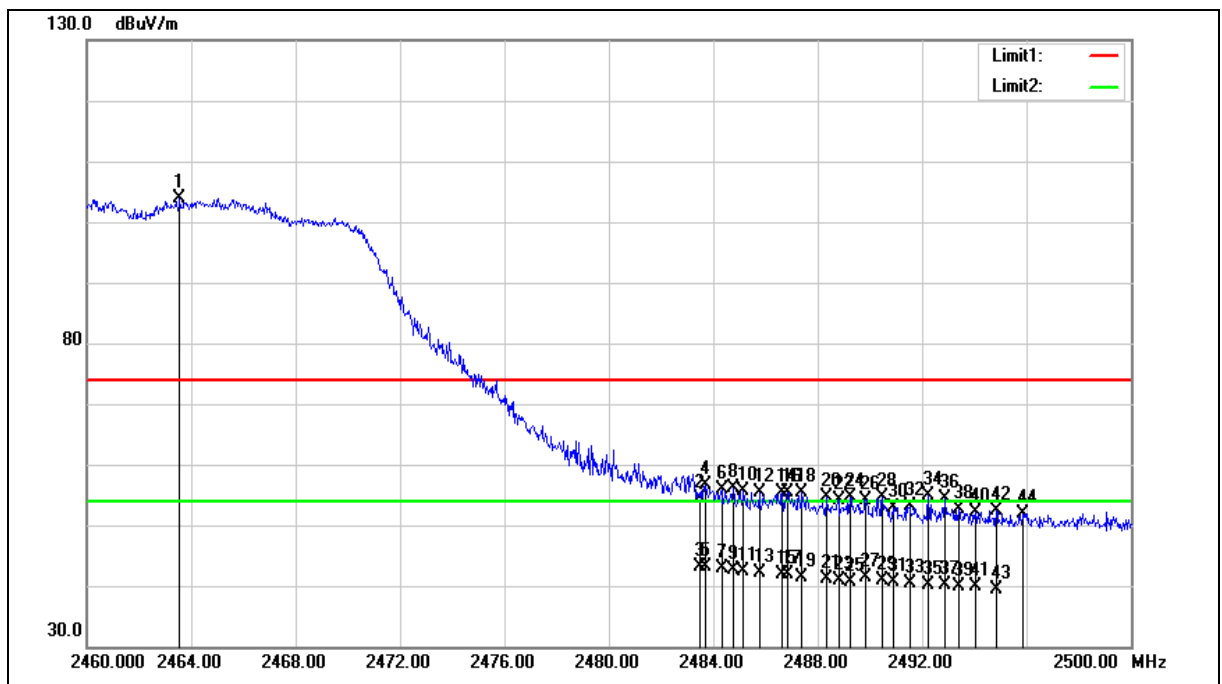

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.560	111.23	-7.42	103.81	--	--	peak
2	2483.500	61.64	-7.34	54.30	74.00	-19.70	peak
3	2483.500	50.55	-7.34	43.21	54.00	-10.79	AVG
4	2483.720	63.92	-7.34	56.58	74.00	-17.42	peak
5	2483.720	50.42	-7.34	43.08	54.00	-10.92	AVG
6	2484.320	63.28	-7.34	55.94	74.00	-18.06	peak
7	2484.320	50.19	-7.34	42.85	54.00	-11.15	AVG
8	2484.760	63.57	-7.34	56.23	74.00	-17.77	peak
9	2484.760	49.91	-7.34	42.57	54.00	-11.43	AVG
10	2485.160	62.89	-7.33	55.56	74.00	-18.44	peak
11	2485.160	49.76	-7.33	42.43	54.00	-11.57	AVG
12	2485.760	62.82	-7.32	55.50	74.00	-18.50	peak
13	2485.760	49.53	-7.32	42.21	54.00	-11.79	AVG
14	2486.640	62.65	-7.32	55.33	74.00	-18.67	peak
15	2486.640	49.14	-7.32	41.82	54.00	-12.18	AVG
16	2486.840	62.67	-7.32	55.35	74.00	-18.65	peak
17	2486.840	49.09	-7.32	41.77	54.00	-12.23	AVG
18	2487.400	62.73	-7.32	55.41	74.00	-18.59	peak
19	2487.400	48.59	-7.32	41.27	54.00	-12.73	AVG
20	2488.360	61.96	-7.31	54.65	74.00	-19.35	peak
21	2488.360	48.43	-7.31	41.12	54.00	-12.88	AVG
22	2488.800	61.41	-7.31	54.10	74.00	-19.90	peak
23	2488.800	48.08	-7.31	40.77	54.00	-13.23	AVG
24	2489.240	61.95	-7.31	54.64	74.00	-19.36	peak
25	2489.240	47.98	-7.31	40.67	54.00	-13.33	AVG
26	2489.840	61.54	-7.31	54.23	74.00	-19.77	peak
27	2489.840	48.73	-7.31	41.42	54.00	-12.58	AVG

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
28	2490.480	61.84	-7.31	54.53	74.00	-19.47	peak
29	2490.480	48.22	-7.31	40.91	54.00	-13.09	AVG
30	2490.880	60.21	-7.31	52.90	74.00	-21.10	peak
31	2490.880	48.02	-7.31	40.71	54.00	-13.29	AVG
32	2491.520	60.44	-7.31	53.13	74.00	-20.87	peak
33	2491.520	47.73	-7.31	40.42	54.00	-13.58	AVG
34	2492.240	62.12	-7.30	54.82	74.00	-19.18	peak
35	2492.240	47.54	-7.30	40.24	54.00	-13.76	AVG
36	2492.880	61.62	-7.30	54.32	74.00	-19.68	peak
37	2492.880	47.40	-7.30	40.10	54.00	-13.90	AVG
38	2493.400	59.88	-7.29	52.59	74.00	-21.41	peak
39	2493.400	47.14	-7.29	39.85	54.00	-14.15	AVG
40	2494.040	59.32	-7.29	52.03	74.00	-21.97	peak
41	2494.040	47.09	-7.29	39.80	54.00	-14.20	AVG
42	2494.840	59.72	-7.29	52.43	74.00	-21.57	peak
43	2494.840	46.74	-7.29	39.45	54.00	-14.55	AVG
44	2495.880	59.26	-7.28	51.98	74.00	-22.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

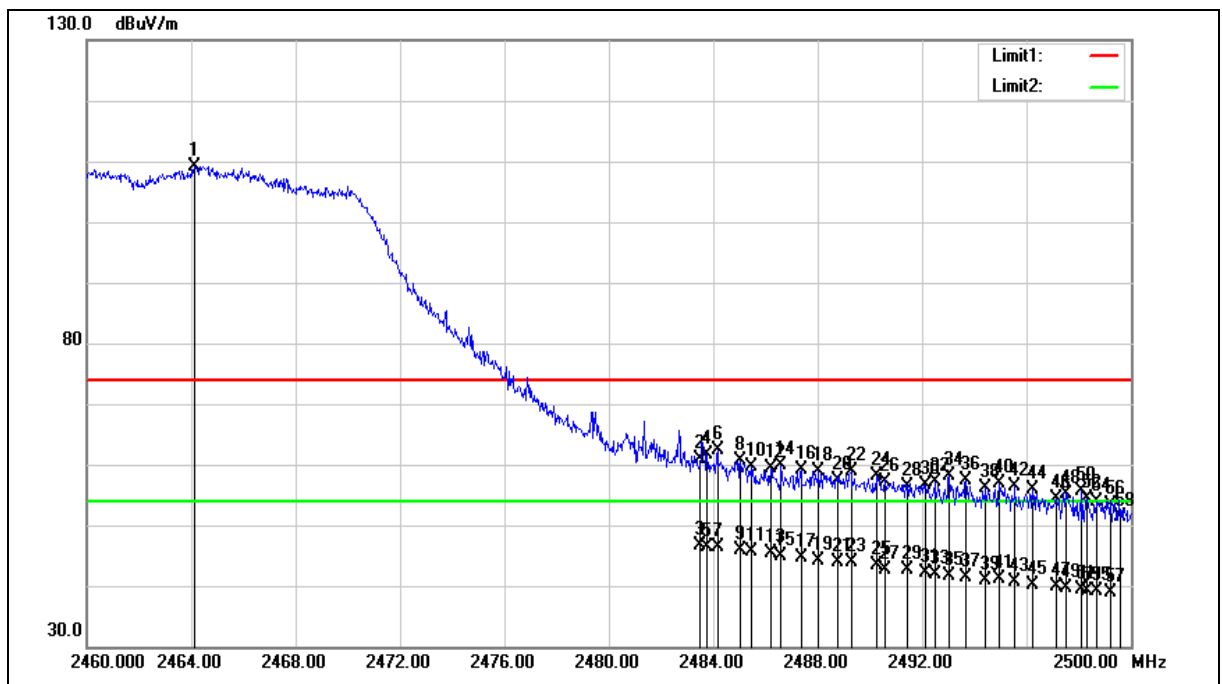

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2464.120	116.61	-7.42	109.19	--	--	peak
2	2483.500	68.27	-7.34	60.93	74.00	-13.07	peak
3	2483.500	53.93	-7.34	46.59	54.00	-7.41	AVG
4	2483.760	69.00	-7.34	61.66	74.00	-12.34	peak
5	2483.760	53.73	-7.34	46.39	54.00	-7.61	AVG
6	2484.160	69.65	-7.34	62.31	74.00	-11.69	peak
7	2484.160	53.63	-7.34	46.29	54.00	-7.71	AVG
8	2485.040	67.85	-7.33	60.52	74.00	-13.48	peak
9	2485.040	53.19	-7.33	45.86	54.00	-8.14	AVG
10	2485.440	67.04	-7.32	59.72	74.00	-14.28	peak
11	2485.440	53.02	-7.32	45.70	54.00	-8.30	AVG
12	2486.200	66.63	-7.32	59.31	74.00	-14.69	peak
13	2486.200	52.65	-7.32	45.33	54.00	-8.67	AVG
14	2486.600	67.15	-7.32	59.83	74.00	-14.17	peak
15	2486.600	52.24	-7.32	44.92	54.00	-9.08	AVG
16	2487.360	66.55	-7.32	59.23	74.00	-14.77	peak
17	2487.360	51.91	-7.32	44.59	54.00	-9.41	AVG
18	2488.040	66.16	-7.32	58.84	74.00	-15.16	peak
19	2488.040	51.44	-7.32	44.12	54.00	-9.88	AVG
20	2488.760	64.71	-7.31	57.40	74.00	-16.60	peak
21	2488.760	51.27	-7.31	43.96	54.00	-10.04	AVG
22	2489.280	66.09	-7.31	58.78	74.00	-15.22	peak
23	2489.280	51.10	-7.31	43.79	54.00	-10.21	AVG
24	2490.240	65.50	-7.31	58.19	74.00	-15.81	peak
25	2490.240	50.74	-7.31	43.43	54.00	-10.57	AVG
26	2490.600	64.38	-7.31	57.07	74.00	-16.93	peak
27	2490.600	49.98	-7.31	42.67	54.00	-11.33	AVG

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
28	2491.440	63.67	-7.31	56.36	74.00	-17.64	peak
29	2491.440	49.88	-7.31	42.57	54.00	-11.43	AVG
30	2492.120	64.00	-7.30	56.70	74.00	-17.30	peak
31	2492.120	49.41	-7.30	42.11	54.00	-11.89	AVG
32	2492.480	64.47	-7.30	57.17	74.00	-16.83	peak
33	2492.480	49.20	-7.30	41.90	54.00	-12.10	AVG
34	2493.040	65.52	-7.30	58.22	74.00	-15.78	peak
35	2493.040	48.93	-7.30	41.63	54.00	-12.37	AVG
36	2493.680	64.68	-7.29	57.39	74.00	-16.61	peak
37	2493.680	48.62	-7.29	41.33	54.00	-12.67	AVG
38	2494.440	63.47	-7.29	56.18	74.00	-17.82	peak
39	2494.440	48.22	-7.29	40.93	54.00	-13.07	AVG
40	2494.960	64.07	-7.29	56.78	74.00	-17.22	peak
41	2494.960	48.31	-7.29	41.02	54.00	-12.98	AVG
42	2495.560	63.68	-7.28	56.40	74.00	-17.60	peak
43	2495.560	47.82	-7.28	40.54	54.00	-13.46	AVG
44	2496.240	63.09	-7.28	55.81	74.00	-18.19	peak
45	2496.240	47.48	-7.28	40.20	54.00	-13.80	AVG
46	2497.160	61.74	-7.28	54.46	74.00	-19.54	peak
47	2497.160	47.11	-7.28	39.83	54.00	-14.17	AVG
48	2497.520	62.36	-7.28	55.08	74.00	-18.92	peak
49	2497.520	46.96	-7.28	39.68	54.00	-14.32	AVG
50	2498.120	62.85	-7.28	55.57	74.00	-18.43	peak
51	2498.120	46.70	-7.28	39.42	54.00	-14.58	AVG
52	2498.320	61.57	-7.28	54.29	74.00	-19.71	peak
53	2498.320	46.49	-7.28	39.21	54.00	-14.79	AVG
54	2498.680	61.06	-7.27	53.79	74.00	-20.21	peak

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
55	2498.680	46.36	-7.27	39.09	54.00	-14.91	AVG
56	2499.240	60.56	-7.27	53.29	74.00	-20.71	peak
57	2499.240	46.07	-7.27	38.80	54.00	-15.20	AVG
58	2499.600	58.65	-7.27	51.38	74.00	-22.62	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2422 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

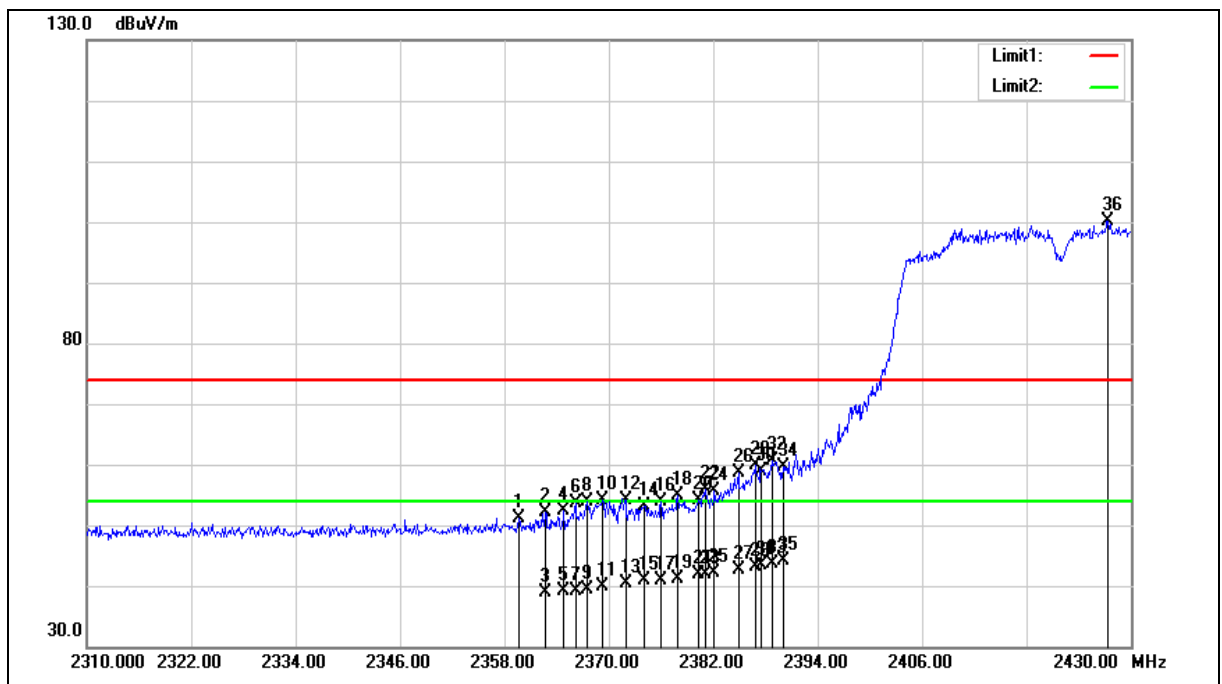

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2422 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2359.680	58.99	-7.84	51.15	74.00	-22.85	peak
2	2362.680	59.86	-7.83	52.03	74.00	-21.97	peak
3	2362.680	46.78	-7.83	38.95	54.00	-15.05	AVG
4	2364.840	60.29	-7.83	52.46	74.00	-21.54	peak
5	2364.840	47.06	-7.83	39.23	54.00	-14.77	AVG
6	2366.160	61.40	-7.82	53.58	74.00	-20.42	peak
7	2366.160	47.04	-7.82	39.22	54.00	-14.78	AVG
8	2367.480	61.78	-7.82	53.96	74.00	-20.04	peak
9	2367.480	47.29	-7.82	39.47	54.00	-14.53	AVG
10	2369.280	61.82	-7.80	54.02	74.00	-19.98	peak
11	2369.280	47.71	-7.80	39.91	54.00	-14.09	AVG
12	2371.920	61.93	-7.78	54.15	74.00	-19.85	peak
13	2371.920	48.21	-7.78	40.43	54.00	-13.57	AVG
14	2374.080	60.90	-7.78	53.12	74.00	-20.88	peak
15	2374.080	48.65	-7.78	40.87	54.00	-13.13	AVG
16	2376.000	61.71	-7.77	53.94	74.00	-20.06	peak
17	2376.000	48.72	-7.77	40.95	54.00	-13.05	AVG
18	2377.920	62.53	-7.77	54.76	74.00	-19.24	peak
19	2377.920	49.02	-7.77	41.25	54.00	-12.75	AVG
20	2380.320	61.88	-7.76	54.12	74.00	-19.88	peak
21	2380.320	49.56	-7.76	41.80	54.00	-12.20	AVG
22	2381.040	63.65	-7.76	55.89	74.00	-18.11	peak
23	2381.040	49.64	-7.76	41.88	54.00	-12.12	AVG
24	2382.120	63.26	-7.75	55.51	74.00	-18.49	peak
25	2382.120	49.90	-7.75	42.15	54.00	-11.85	AVG
26	2384.880	66.27	-7.75	58.52	74.00	-15.48	peak
27	2384.880	50.42	-7.75	42.67	54.00	-11.33	AVG

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2422 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
28	2386.800	67.69	-7.73	59.96	74.00	-14.04	peak
29	2386.800	50.79	-7.73	43.06	54.00	-10.94	AVG
30	2387.520	66.62	-7.73	58.89	74.00	-15.11	peak
31	2387.520	51.23	-7.73	43.50	54.00	-10.50	AVG
32	2388.720	68.28	-7.72	60.56	74.00	-13.44	peak
33	2388.720	51.46	-7.72	43.74	54.00	-10.26	AVG
34	2390.000	67.25	-7.72	59.53	74.00	-14.47	peak
35	2390.000	51.92	-7.72	44.20	54.00	-9.80	AVG
36	2427.360	107.68	-7.56	100.12	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2422 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

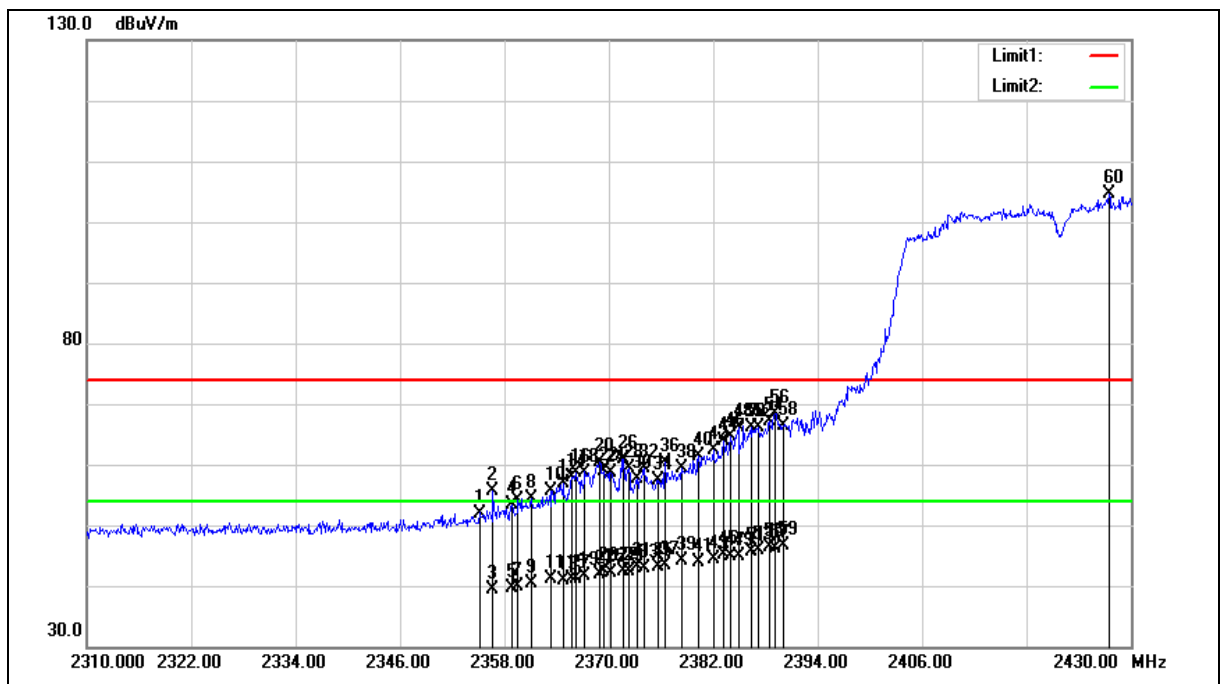

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2422 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2355.120	59.86	-7.86	52.00	74.00	-22.00	peak
2	2356.680	63.55	-7.86	55.69	74.00	-18.31	peak
3	2356.680	47.22	-7.86	39.36	54.00	-14.64	AVG
4	2358.840	61.15	-7.84	53.31	74.00	-20.69	peak
5	2358.840	47.51	-7.84	39.67	54.00	-14.33	AVG
6	2359.560	61.91	-7.84	54.07	74.00	-19.93	peak
7	2359.560	47.82	-7.84	39.98	54.00	-14.02	AVG
8	2361.120	62.16	-7.84	54.32	74.00	-19.68	peak
9	2361.120	48.13	-7.84	40.29	54.00	-13.71	AVG
10	2363.400	63.48	-7.83	55.65	74.00	-18.35	peak
11	2363.400	49.02	-7.83	41.19	54.00	-12.81	AVG
12	2364.720	64.59	-7.83	56.76	74.00	-17.24	peak
13	2364.720	48.81	-7.83	40.98	54.00	-13.02	AVG
14	2365.680	65.63	-7.82	57.81	74.00	-16.19	peak
15	2365.680	48.98	-7.82	41.16	54.00	-12.84	AVG
16	2366.160	66.33	-7.82	58.51	74.00	-15.49	peak
17	2366.160	48.90	-7.82	41.08	54.00	-12.92	AVG
18	2367.240	66.57	-7.82	58.75	74.00	-15.25	peak
19	2367.240	49.42	-7.82	41.60	54.00	-12.40	AVG
20	2368.920	68.10	-7.80	60.30	74.00	-13.70	peak
21	2368.920	49.67	-7.80	41.87	54.00	-12.13	AVG
22	2369.400	66.65	-7.80	58.85	74.00	-15.15	peak
23	2369.400	50.06	-7.80	42.26	54.00	-11.74	AVG
24	2370.240	66.34	-7.80	58.54	74.00	-15.46	peak
25	2370.240	49.92	-7.80	42.12	54.00	-11.88	AVG
26	2371.680	68.73	-7.78	60.95	74.00	-13.05	peak
27	2371.680	50.08	-7.78	42.30	54.00	-11.70	AVG

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2422 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
28	2372.280	67.24	-7.78	59.46	74.00	-14.54	peak
29	2372.280	50.19	-7.78	42.41	54.00	-11.59	AVG
30	2373.240	65.53	-7.78	57.75	74.00	-16.25	peak
31	2373.240	50.80	-7.78	43.02	54.00	-10.98	AVG
32	2374.080	67.22	-7.78	59.44	74.00	-14.56	peak
33	2374.080	50.76	-7.78	42.98	54.00	-11.02	AVG
34	2375.640	65.12	-7.77	57.35	74.00	-16.65	peak
35	2375.640	50.81	-7.77	43.04	54.00	-10.96	AVG
36	2376.480	68.04	-7.77	60.27	74.00	-13.73	peak
37	2376.480	51.17	-7.77	43.40	54.00	-10.60	AVG
38	2378.400	67.14	-7.76	59.38	74.00	-14.62	peak
39	2378.400	51.78	-7.76	44.02	54.00	-9.98	AVG
40	2380.320	69.02	-7.76	61.26	74.00	-12.74	peak
41	2380.320	51.55	-7.76	43.79	54.00	-10.21	AVG
42	2382.000	70.25	-7.75	62.50	74.00	-11.50	peak
43	2382.000	52.02	-7.75	44.27	54.00	-9.73	AVG
44	2383.200	71.75	-7.75	64.00	74.00	-10.00	peak
45	2383.200	52.91	-7.75	45.16	54.00	-8.84	AVG
46	2383.920	72.40	-7.75	64.65	74.00	-9.35	peak
47	2383.920	52.62	-7.75	44.87	54.00	-9.13	AVG
48	2384.880	73.86	-7.75	66.11	74.00	-7.89	peak
49	2384.880	52.60	-7.75	44.85	54.00	-9.15	AVG
50	2386.440	73.85	-7.73	66.12	74.00	-7.88	peak
51	2386.440	53.44	-7.73	45.71	54.00	-8.29	AVG
52	2387.160	73.78	-7.73	66.05	74.00	-7.95	peak
53	2387.160	53.65	-7.73	45.92	54.00	-8.08	AVG
54	2388.480	74.77	-7.72	67.05	74.00	-6.95	peak

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2422 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
55	2388.480	54.09	-7.72	46.37	54.00	-7.63	AVG
56	2389.080	76.20	-7.72	68.48	74.00	-5.52	peak
57	2389.080	53.92	-7.72	46.20	54.00	-7.80	AVG
58	2390.000	74.14	-7.72	66.42	74.00	-7.58	peak
59	2390.000	54.41	-7.72	46.69	54.00	-7.31	AVG
60	2427.480	112.07	-7.56	104.51	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

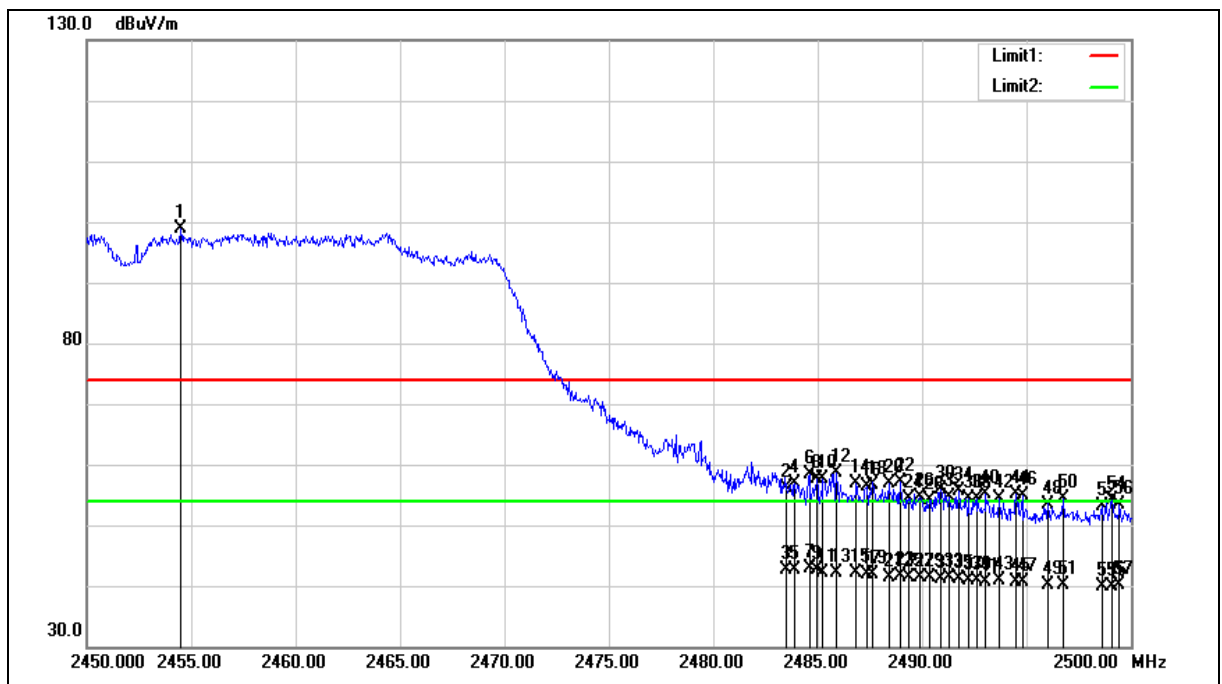

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2454.500	106.30	-7.46	98.84	--	--	peak
2	2483.500	63.55	-7.34	56.21	74.00	-17.79	peak
3	2483.500	49.96	-7.34	42.62	54.00	-11.38	AVG
4	2483.900	64.22	-7.34	56.88	74.00	-17.12	peak
5	2483.900	49.87	-7.34	42.53	54.00	-11.47	AVG
6	2484.600	65.64	-7.34	58.30	74.00	-15.70	peak
7	2484.600	50.10	-7.34	42.76	54.00	-11.24	AVG
8	2484.950	64.91	-7.34	57.57	74.00	-16.43	peak
9	2484.950	50.03	-7.34	42.69	54.00	-11.31	AVG
10	2485.250	65.02	-7.33	57.69	74.00	-16.31	peak
11	2485.250	49.43	-7.33	42.10	54.00	-11.90	AVG
12	2485.900	65.98	-7.32	58.66	74.00	-15.34	peak
13	2485.900	49.55	-7.32	42.23	54.00	-11.77	AVG
14	2486.850	64.30	-7.32	56.98	74.00	-17.02	peak
15	2486.850	49.36	-7.32	42.04	54.00	-11.96	AVG
16	2487.350	63.77	-7.32	56.45	74.00	-17.55	peak
17	2487.350	49.15	-7.32	41.83	54.00	-12.17	AVG
18	2487.650	64.07	-7.32	56.75	74.00	-17.25	peak
19	2487.650	49.08	-7.32	41.76	54.00	-12.24	AVG
20	2488.400	64.19	-7.31	56.88	74.00	-17.12	peak
21	2488.400	48.80	-7.31	41.49	54.00	-12.51	AVG
22	2488.950	64.55	-7.31	57.24	74.00	-16.76	peak
23	2488.950	48.83	-7.31	41.52	54.00	-12.48	AVG
24	2489.350	61.66	-7.31	54.35	74.00	-19.65	peak
25	2489.350	48.66	-7.31	41.35	54.00	-12.65	AVG
26	2489.900	61.99	-7.31	54.68	74.00	-19.32	peak
27	2489.900	48.68	-7.31	41.37	54.00	-12.63	AVG

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
28	2490.350	61.49	-7.31	54.18	74.00	-19.82	peak
29	2490.350	48.76	-7.31	41.45	54.00	-12.55	AVG
30	2490.900	63.30	-7.31	55.99	74.00	-18.01	peak
31	2490.900	48.43	-7.31	41.12	54.00	-12.88	AVG
32	2491.300	61.97	-7.31	54.66	74.00	-19.34	peak
33	2491.300	48.74	-7.31	41.43	54.00	-12.57	AVG
34	2491.750	63.04	-7.30	55.74	74.00	-18.26	peak
35	2491.750	48.46	-7.30	41.16	54.00	-12.84	AVG
36	2492.200	61.63	-7.30	54.33	74.00	-19.67	peak
37	2492.200	48.25	-7.30	40.95	54.00	-13.05	AVG
38	2492.650	61.58	-7.30	54.28	74.00	-19.72	peak
39	2492.650	48.12	-7.30	40.82	54.00	-13.18	AVG
40	2493.050	62.42	-7.30	55.12	74.00	-18.88	peak
41	2493.050	47.90	-7.30	40.60	54.00	-13.40	AVG
42	2493.700	61.62	-7.29	54.33	74.00	-19.67	peak
43	2493.700	48.17	-7.29	40.88	54.00	-13.12	AVG
44	2494.500	62.35	-7.29	55.06	74.00	-18.94	peak
45	2494.500	47.93	-7.29	40.64	54.00	-13.36	AVG
46	2494.800	62.11	-7.29	54.82	74.00	-19.18	peak
47	2494.800	47.86	-7.29	40.57	54.00	-13.43	AVG
48	2496.000	60.78	-7.28	53.50	74.00	-20.50	peak
49	2496.000	47.49	-7.28	40.21	54.00	-13.79	AVG
50	2496.750	61.55	-7.28	54.27	74.00	-19.73	peak
51	2496.750	47.52	-7.28	40.24	54.00	-13.76	AVG
52	2498.600	60.50	-7.27	53.23	74.00	-20.77	peak
53	2498.600	47.12	-7.27	39.85	54.00	-14.15	AVG
54	2499.100	61.50	-7.27	54.23	74.00	-19.77	peak

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
55	2499.100	47.17	-7.27	39.90	54.00	-14.10	AVG
56	2499.450	60.62	-7.27	53.35	74.00	-20.65	peak
57	2499.450	47.32	-7.27	40.05	54.00	-13.95	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

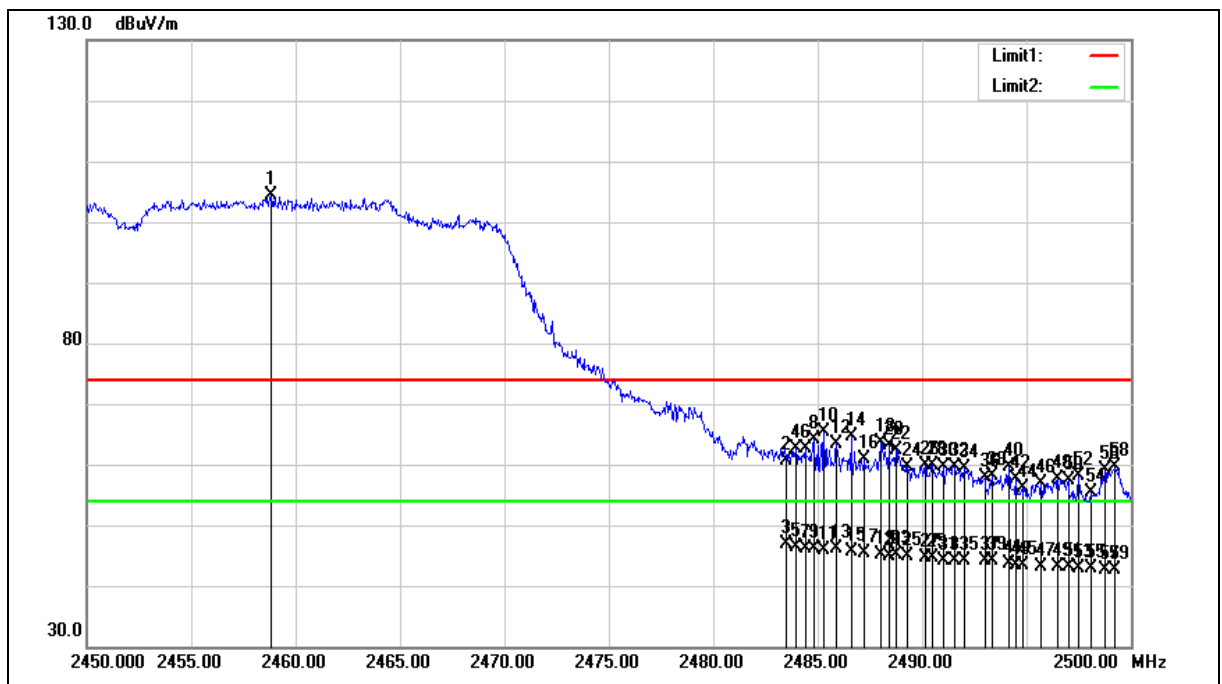

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2458.850	111.88	-7.43	104.45	--	--	peak
2	2483.500	68.06	-7.34	60.72	74.00	-13.28	peak
3	2483.500	54.17	-7.34	46.83	54.00	-7.17	AVG
4	2483.950	69.98	-7.34	62.64	74.00	-11.36	peak
5	2483.950	53.81	-7.34	46.47	54.00	-7.53	AVG
6	2484.400	70.05	-7.34	62.71	74.00	-11.29	peak
7	2484.400	53.57	-7.34	46.23	54.00	-7.77	AVG
8	2484.800	71.58	-7.34	64.24	74.00	-9.76	peak
9	2484.800	53.48	-7.34	46.14	54.00	-7.86	AVG
10	2485.300	72.64	-7.32	65.32	74.00	-8.68	peak
11	2485.300	53.20	-7.32	45.88	54.00	-8.12	AVG
12	2485.900	70.80	-7.32	63.48	74.00	-10.52	peak
13	2485.900	53.35	-7.32	46.03	54.00	-7.97	AVG
14	2486.600	72.02	-7.32	64.70	74.00	-9.30	peak
15	2486.600	52.98	-7.32	45.66	54.00	-8.34	AVG
16	2487.250	68.19	-7.32	60.87	74.00	-13.13	peak
17	2487.250	52.81	-7.32	45.49	54.00	-8.51	AVG
18	2488.050	70.93	-7.32	63.61	74.00	-10.39	peak
19	2488.050	52.55	-7.32	45.23	54.00	-8.77	AVG
20	2488.400	70.47	-7.31	63.16	74.00	-10.84	peak
21	2488.400	52.24	-7.31	44.93	54.00	-9.07	AVG
22	2488.750	69.68	-7.31	62.37	74.00	-11.63	peak
23	2488.750	52.37	-7.31	45.06	54.00	-8.94	AVG
24	2489.300	66.91	-7.31	59.60	74.00	-14.40	peak
25	2489.300	52.30	-7.31	44.99	54.00	-9.01	AVG
26	2490.150	67.13	-7.31	59.82	74.00	-14.18	peak
27	2490.150	51.99	-7.31	44.68	54.00	-9.32	AVG

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
28	2490.500	67.18	-7.31	59.87	74.00	-14.13	peak
29	2490.500	51.97	-7.31	44.66	54.00	-9.34	AVG
30	2491.000	66.95	-7.31	59.64	74.00	-14.36	peak
31	2491.000	51.50	-7.31	44.19	54.00	-9.81	AVG
32	2491.550	67.04	-7.31	59.73	74.00	-14.27	peak
33	2491.550	51.49	-7.31	44.18	54.00	-9.82	AVG
34	2492.000	66.56	-7.30	59.26	74.00	-14.74	peak
35	2492.000	51.33	-7.30	44.03	54.00	-9.97	AVG
36	2493.000	65.13	-7.30	57.83	74.00	-16.17	peak
37	2493.000	51.41	-7.30	44.11	54.00	-9.89	AVG
38	2493.350	65.45	-7.29	58.16	74.00	-15.84	peak
39	2493.350	51.36	-7.29	44.07	54.00	-9.93	AVG
40	2494.150	66.82	-7.29	59.53	74.00	-14.47	peak
41	2494.150	50.82	-7.29	43.53	54.00	-10.47	AVG
42	2494.500	64.80	-7.29	57.51	74.00	-16.49	peak
43	2494.500	50.58	-7.29	43.29	54.00	-10.71	AVG
44	2494.800	63.37	-7.29	56.08	74.00	-17.92	peak
45	2494.800	50.59	-7.29	43.30	54.00	-10.70	AVG
46	2495.700	64.24	-7.28	56.96	74.00	-17.04	peak
47	2495.700	50.43	-7.28	43.15	54.00	-10.85	AVG
48	2496.500	65.01	-7.28	57.73	74.00	-16.27	peak
49	2496.500	50.38	-7.28	43.10	54.00	-10.90	AVG
50	2497.000	64.55	-7.28	57.27	74.00	-16.73	peak
51	2497.000	50.36	-7.28	43.08	54.00	-10.92	AVG
52	2497.500	65.41	-7.28	58.13	74.00	-15.87	peak
53	2497.500	50.04	-7.28	42.76	54.00	-11.24	AVG
54	2498.100	62.66	-7.28	55.38	74.00	-18.62	peak

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
55	2498.100	50.19	-7.28	42.91	54.00	-11.09	AVG
56	2498.750	66.47	-7.27	59.20	74.00	-14.80	peak
57	2498.750	49.87	-7.27	42.60	54.00	-11.40	AVG
58	2499.250	66.90	-7.27	59.63	74.00	-14.37	peak
59	2499.250	49.82	-7.27	42.55	54.00	-11.45	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

With HDMI

其它不必要之訊號 (1 GHz 以下)

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	2462 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

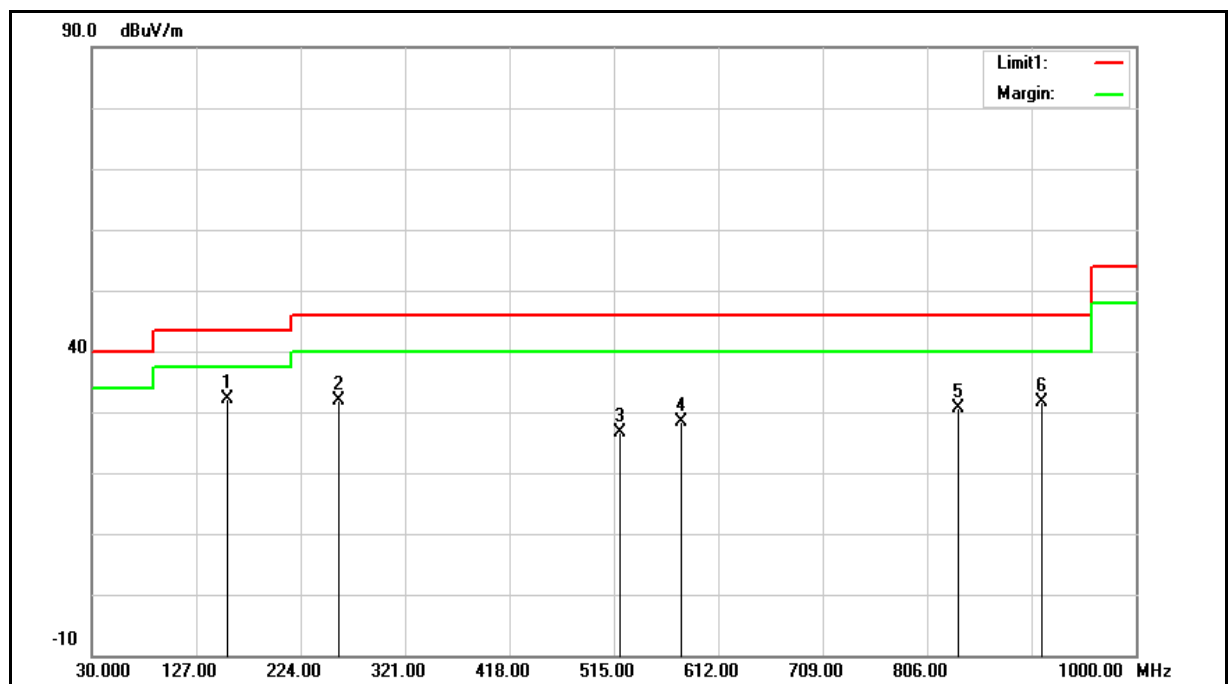

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	156.1000	39.56	-7.54	32.02	43.50	-11.48	QP
2	259.8900	39.87	-8.10	31.77	46.00	-14.23	QP
3	520.8200	29.79	-3.13	26.66	46.00	-19.34	QP
4	578.0500	30.03	-1.77	28.26	46.00	-17.74	QP
5	835.1000	28.48	2.05	30.53	46.00	-15.47	QP
6	912.7000	28.48	3.26	31.74	46.00	-14.26	QP


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

Example: $32.02 = -7.54 + 39.56$

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	2462 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

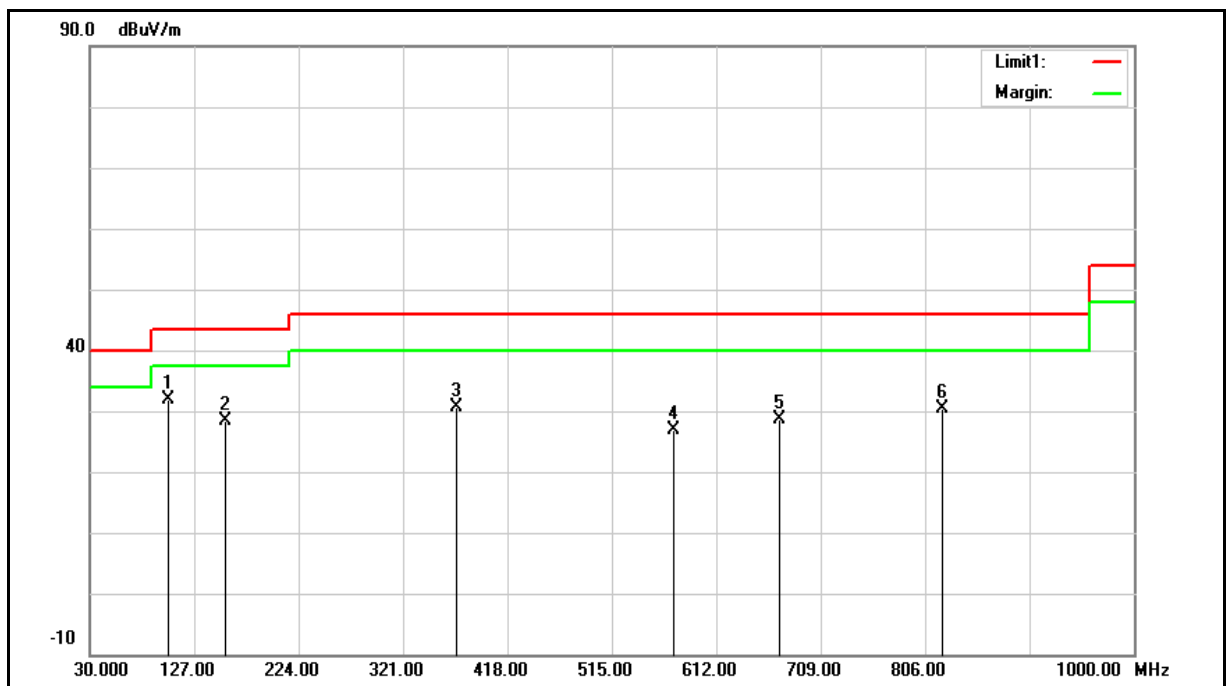

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	102.7500	44.24	-12.28	31.96	43.50	-11.54	QP
2	156.1000	35.95	-7.54	28.41	43.50	-15.09	QP
3	370.4700	35.84	-5.28	30.56	46.00	-15.44	QP
4	572.2300	28.69	-1.92	26.77	46.00	-19.23	QP
5	671.1700	29.04	-0.41	28.63	46.00	-17.37	QP
6	821.5200	28.54	1.89	30.43	46.00	-15.57	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: $31.96 = -12.28 + 44.24$

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

場強輻射量測 (1 GHz 以上)

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

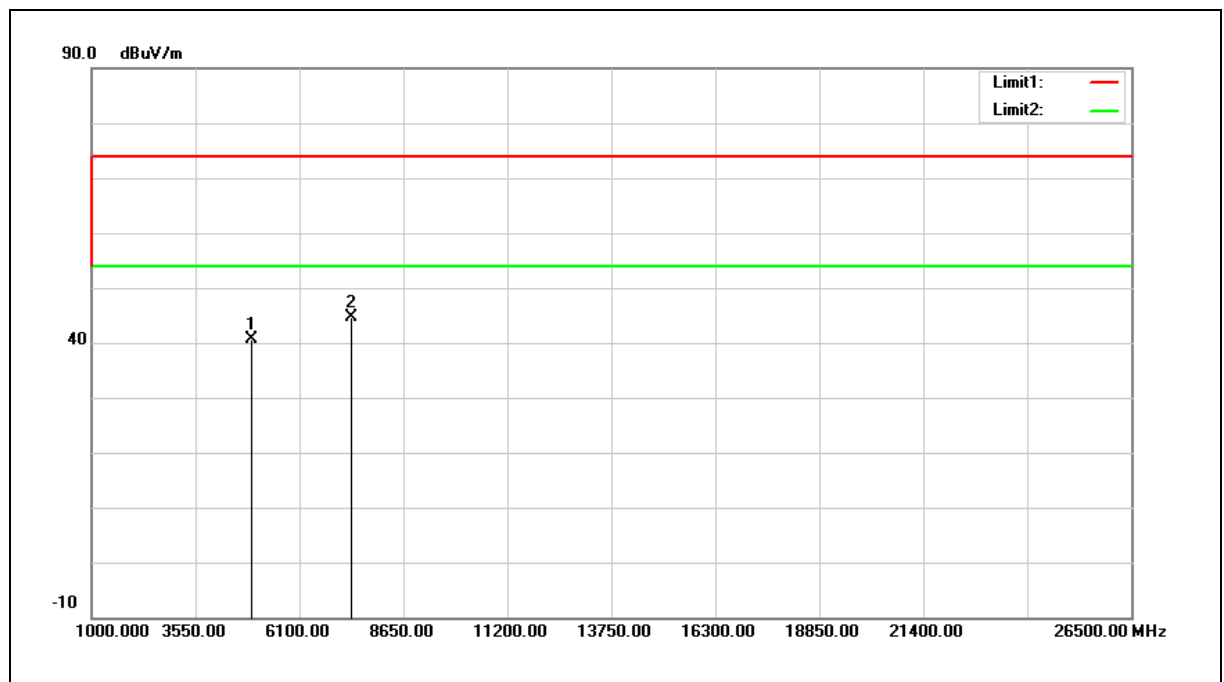

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	41.50	-0.99	40.51	74.00	-33.49	peak
2	7386.000	38.18	6.38	44.56	74.00	-29.44	peak


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

Example: $40.51 = -0.99 + 41.50$

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

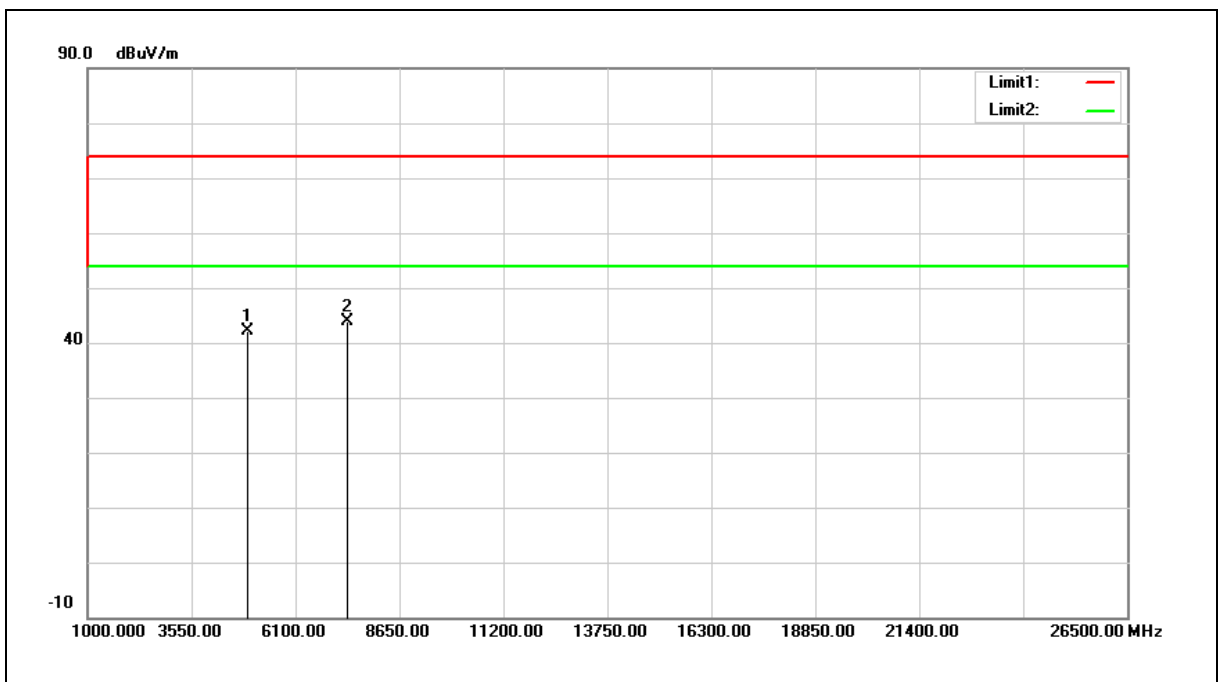

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	43.22	-0.99	42.23	74.00	-31.77	peak
2	7386.000	37.53	6.38	43.91	74.00	-30.09	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.




Annex C. Conducted Test Results (2.4 GHz)


Maximum Conducted Output Power


操作模式	Data Rate (Mbps)	頻道 CH	最大傳導輸出功率(Average)						Limit (dBm)
			ANT-0		ANT-1		ANT-0+1		
			dBm	W	dBm	W	dBm	W	
Mode 2	1	1	11.99	0.016	12.39	0.017	---	---	< 30.00
		6	14.91	0.031	15.22	0.033	---	---	< 30.00
		11	12.09	0.016	12.41	0.017	---	---	< 30.00
Mode 3	6	1	12.01	0.016	12.33	0.017	---	---	< 30.00
		6	14.81	0.030	15.11	0.032	---	---	< 30.00
		11	11.99	0.016	12.32	0.017	---	---	< 30.00
Mode 4	13	1	9.09	0.008	9.17	0.008	12.14	0.016	< 30.00
		6	12.08	0.016	12.12	0.016	15.11	0.032	< 30.00
		11	9.19	0.008	9.22	0.008	12.22	0.017	< 30.00
Mode 5	27	3	7.31	0.005	7.29	0.005	10.31	0.011	< 30.00
		6	12.03	0.016	12.48	0.018	15.27	0.034	< 30.00
		9	7.27	0.005	7.31	0.005	10.30	0.011	< 30.00


Out of Band Conducted Spurious Emission


Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode_ANT-0

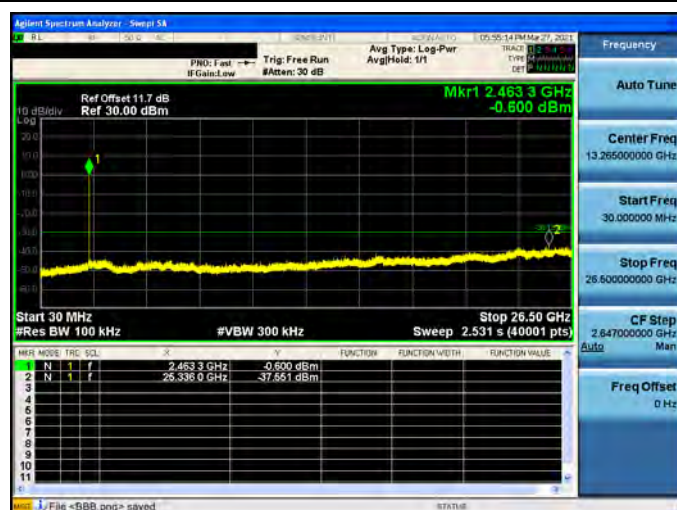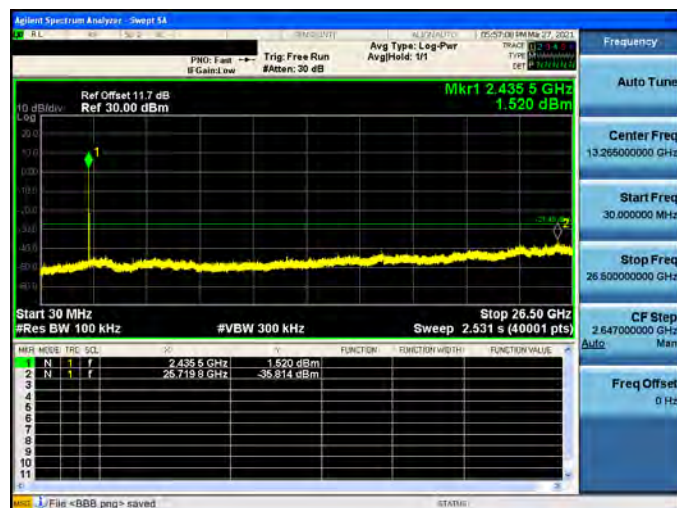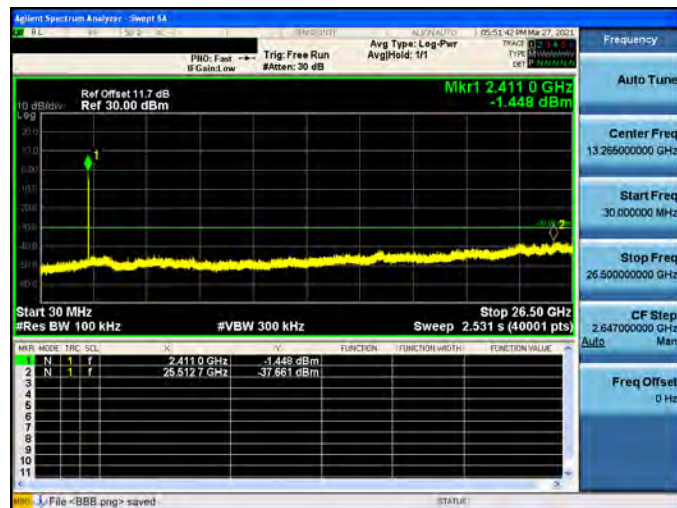


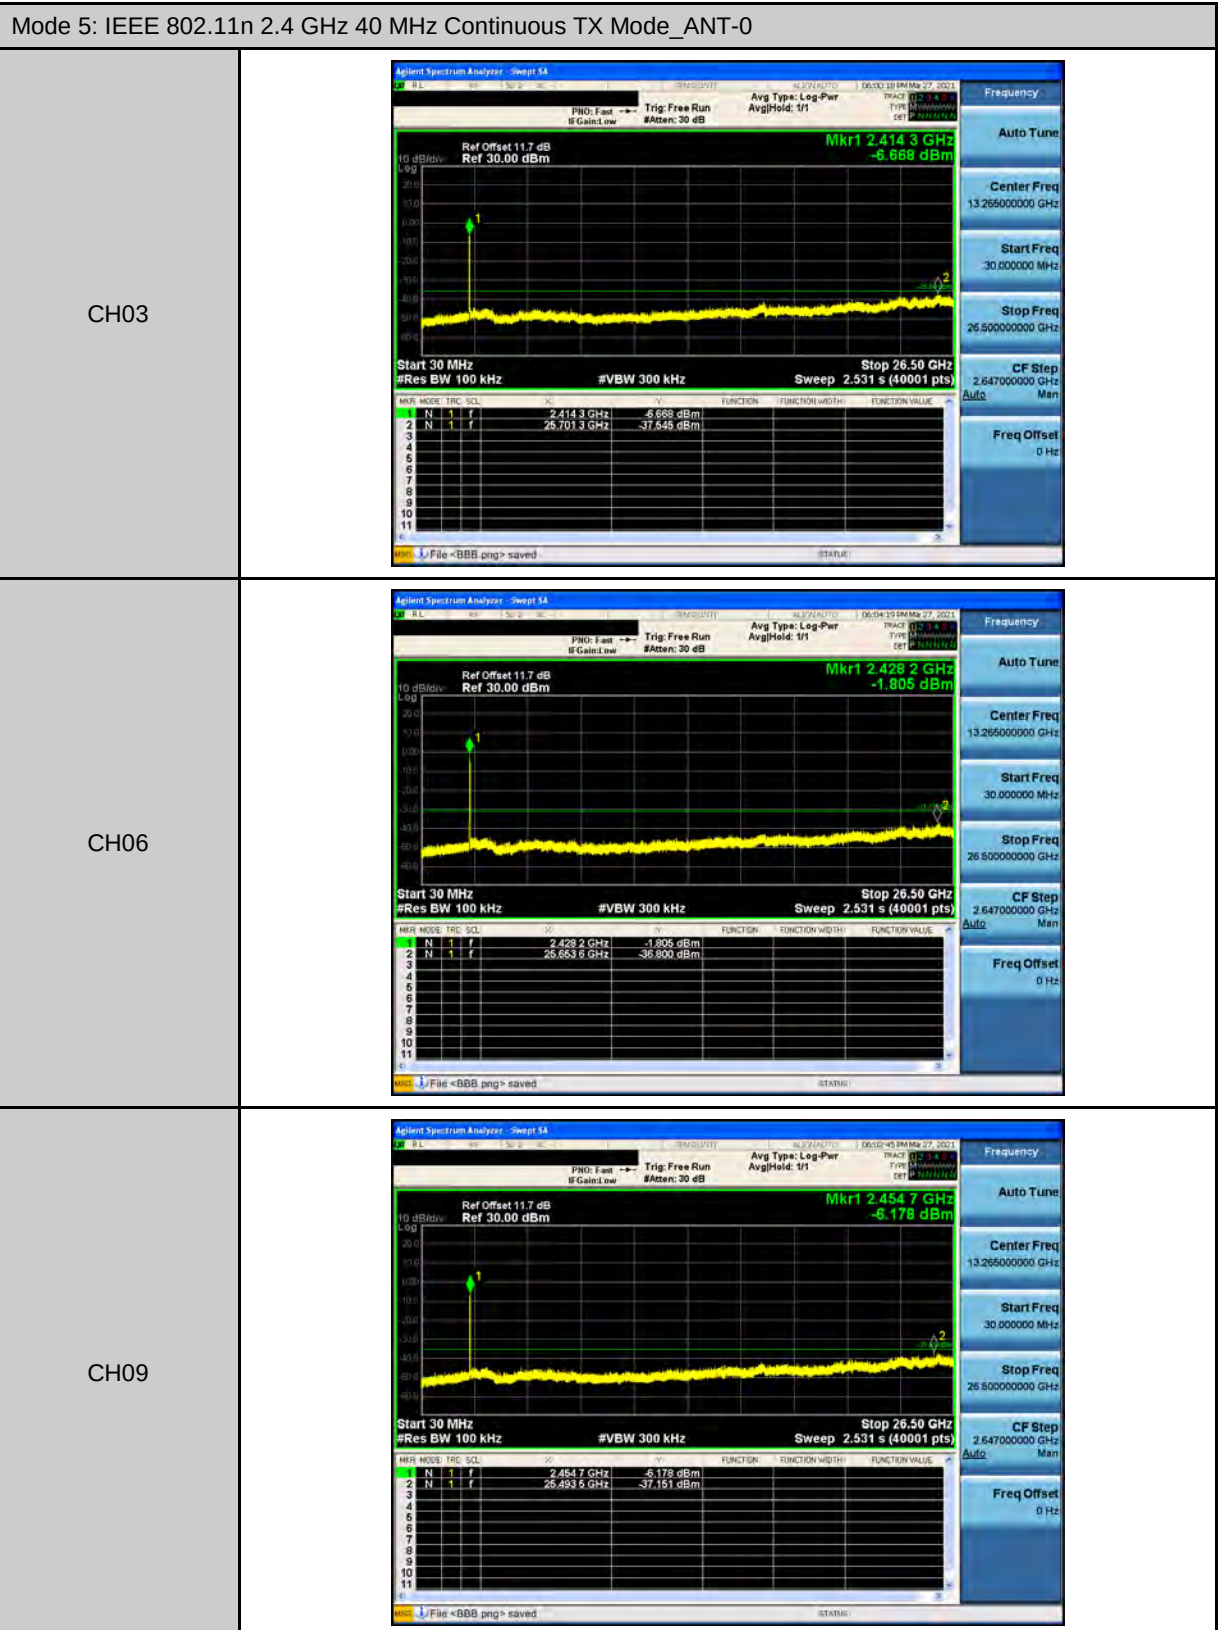

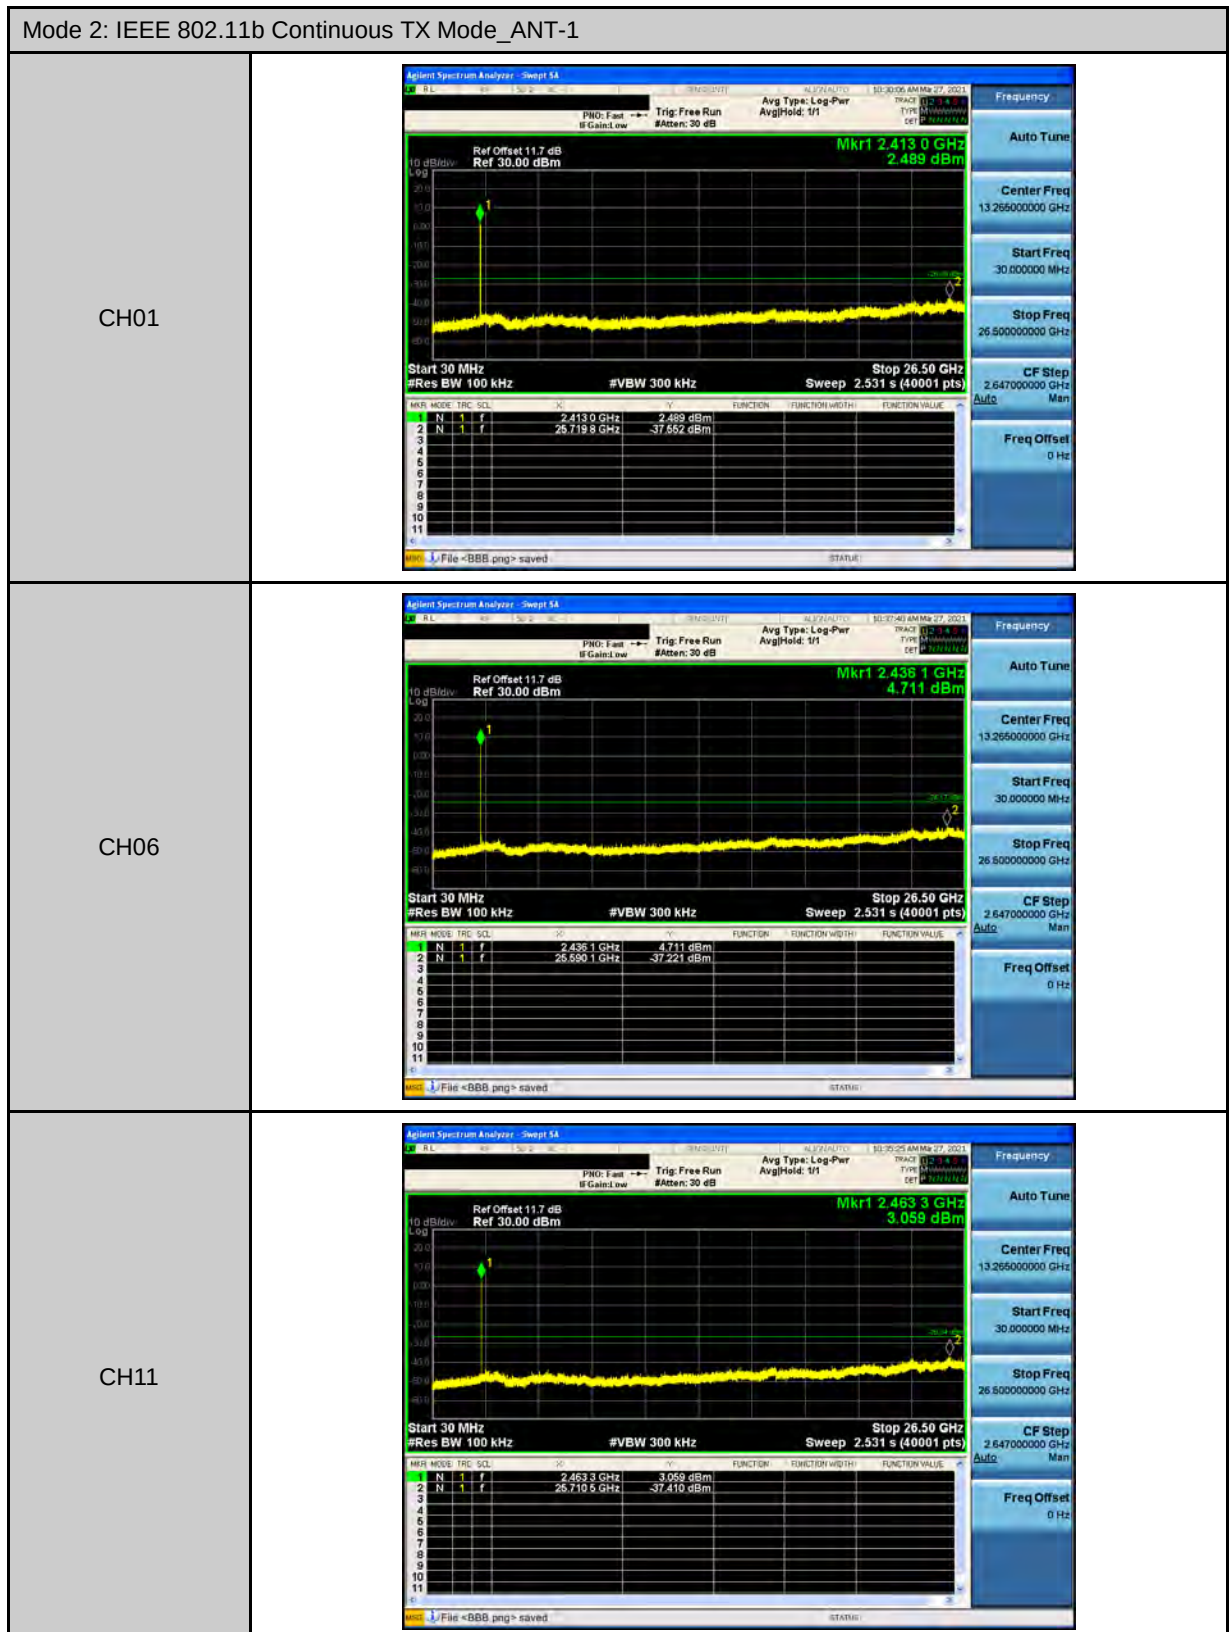

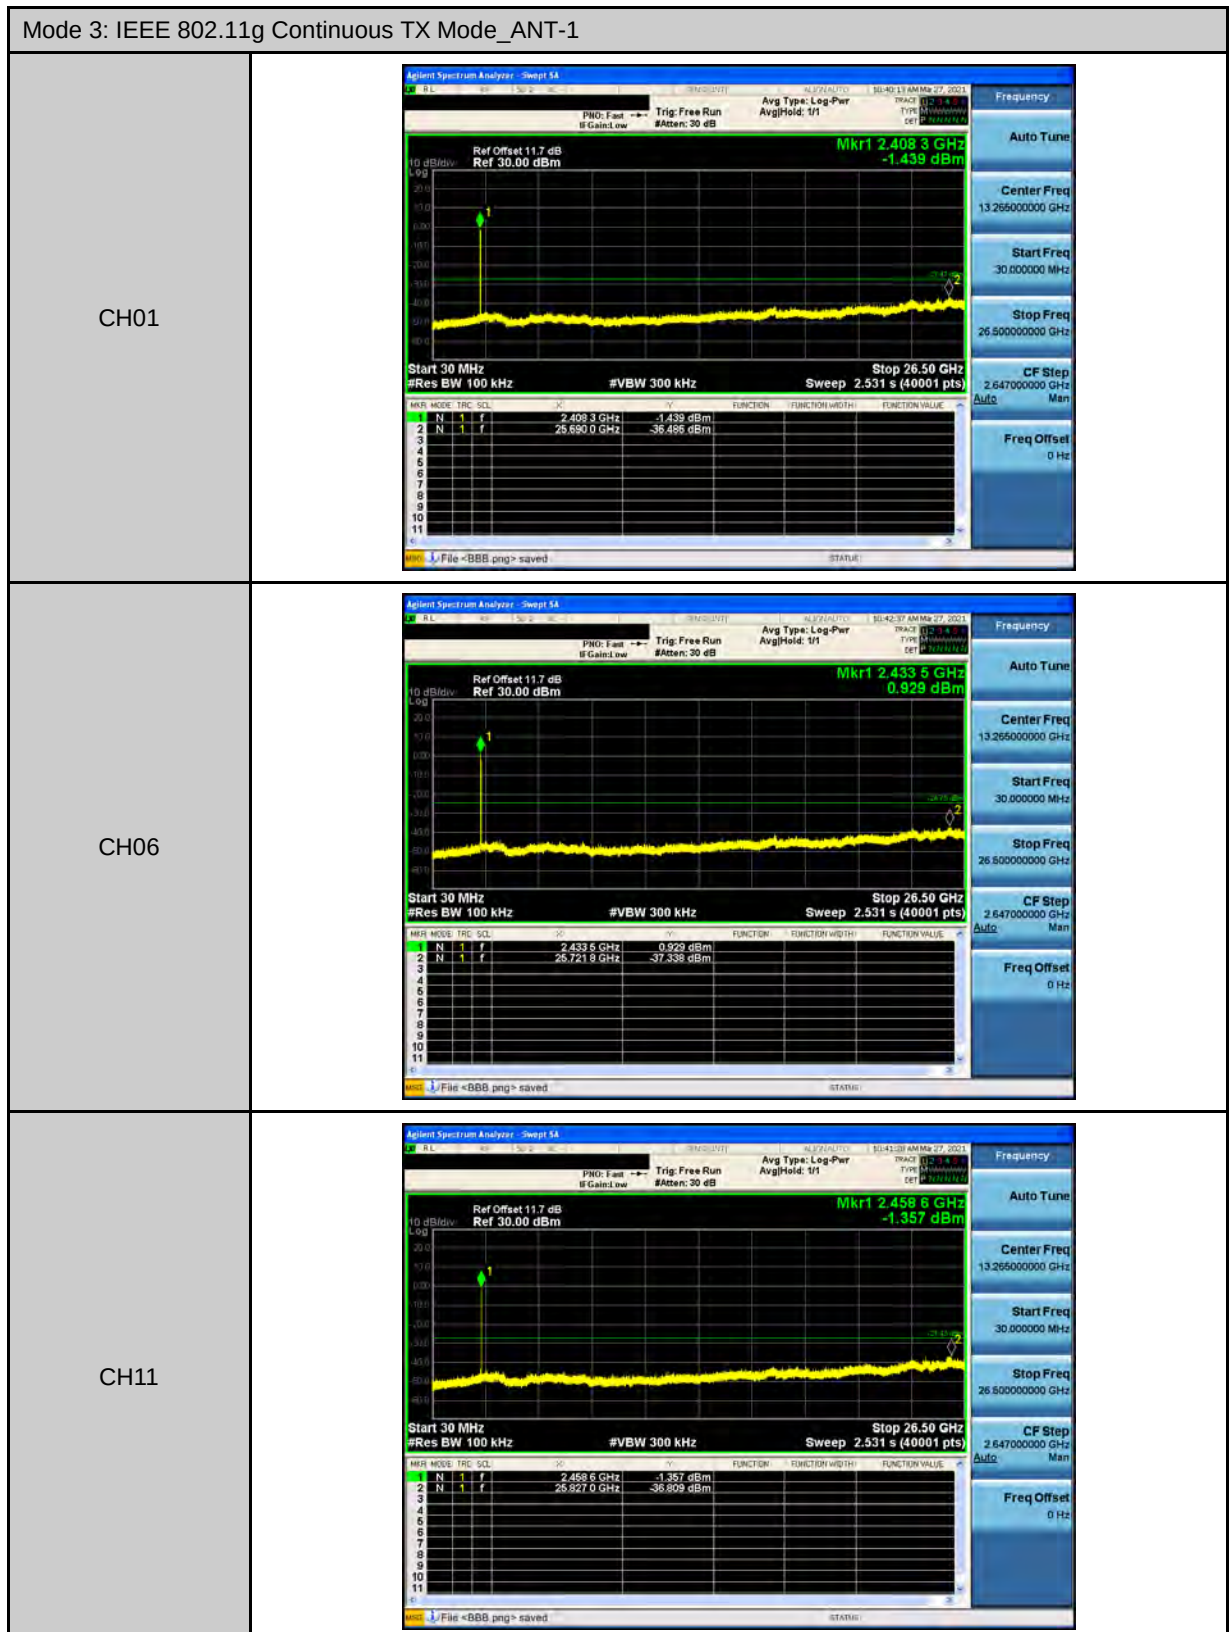


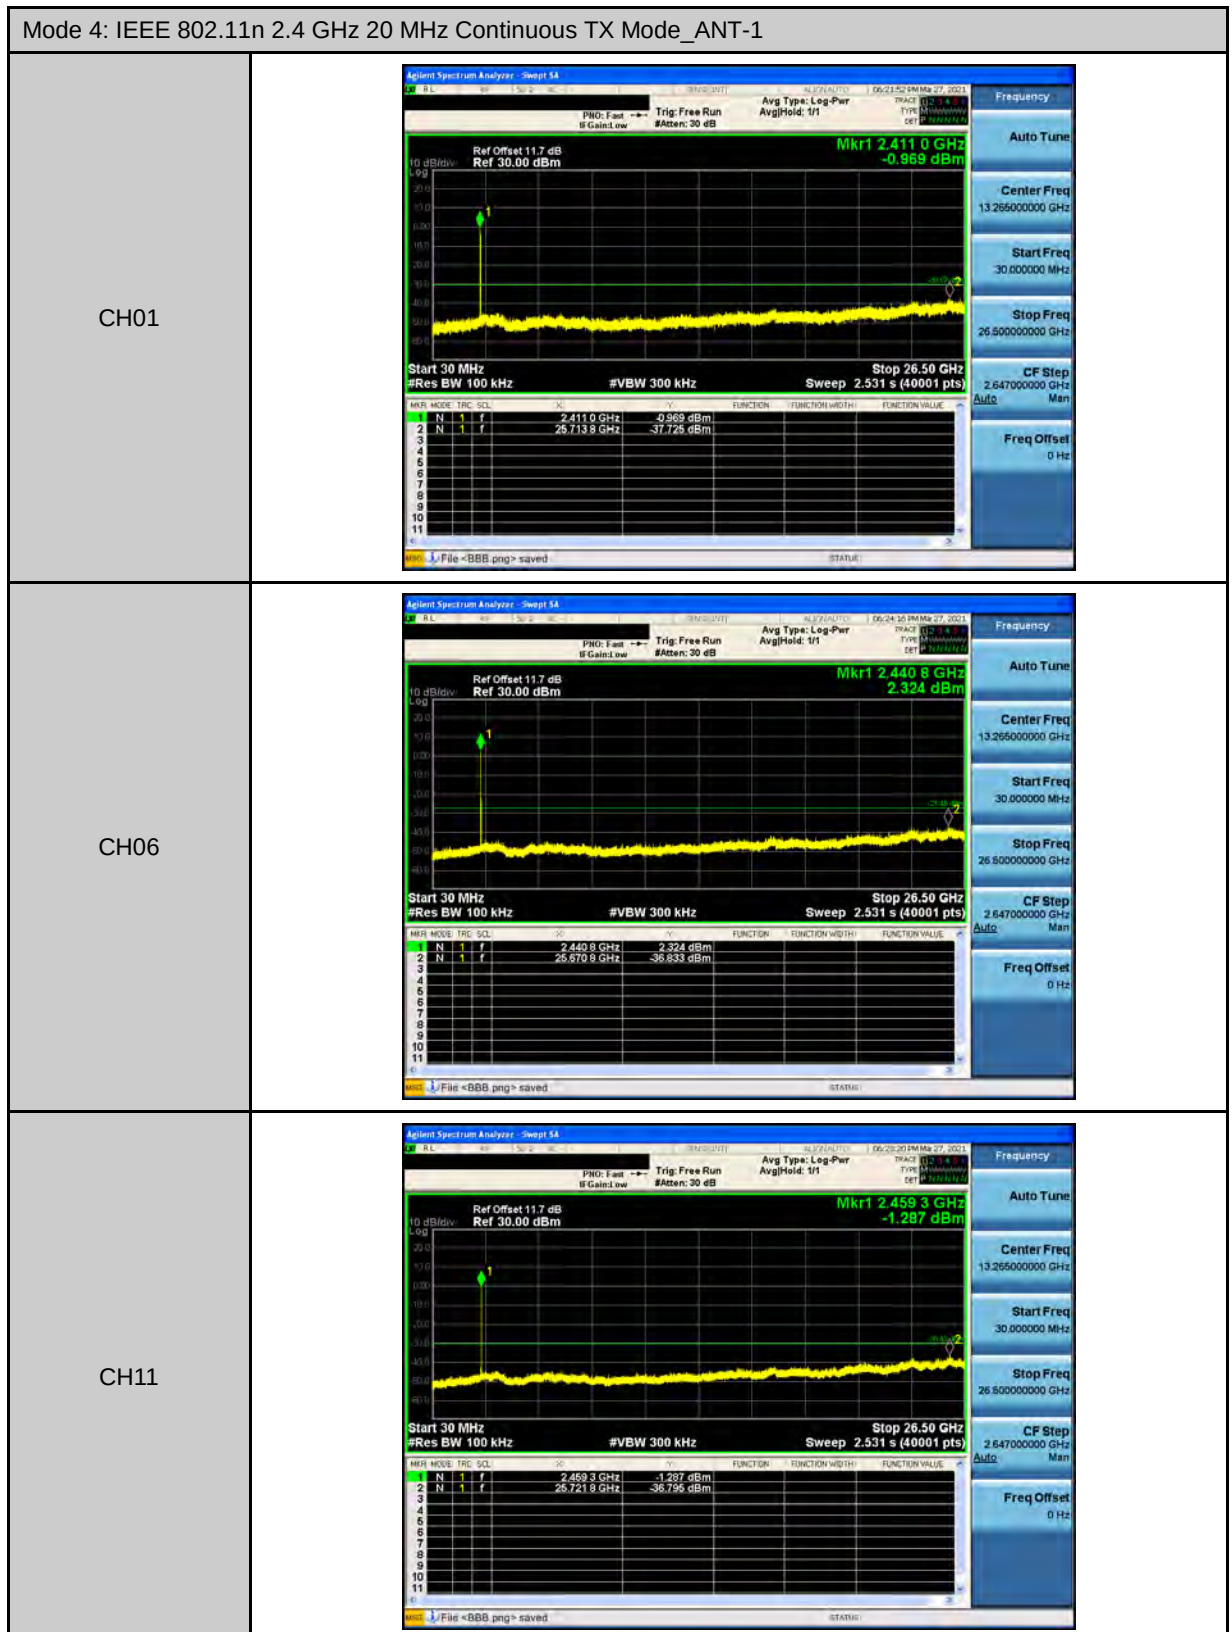


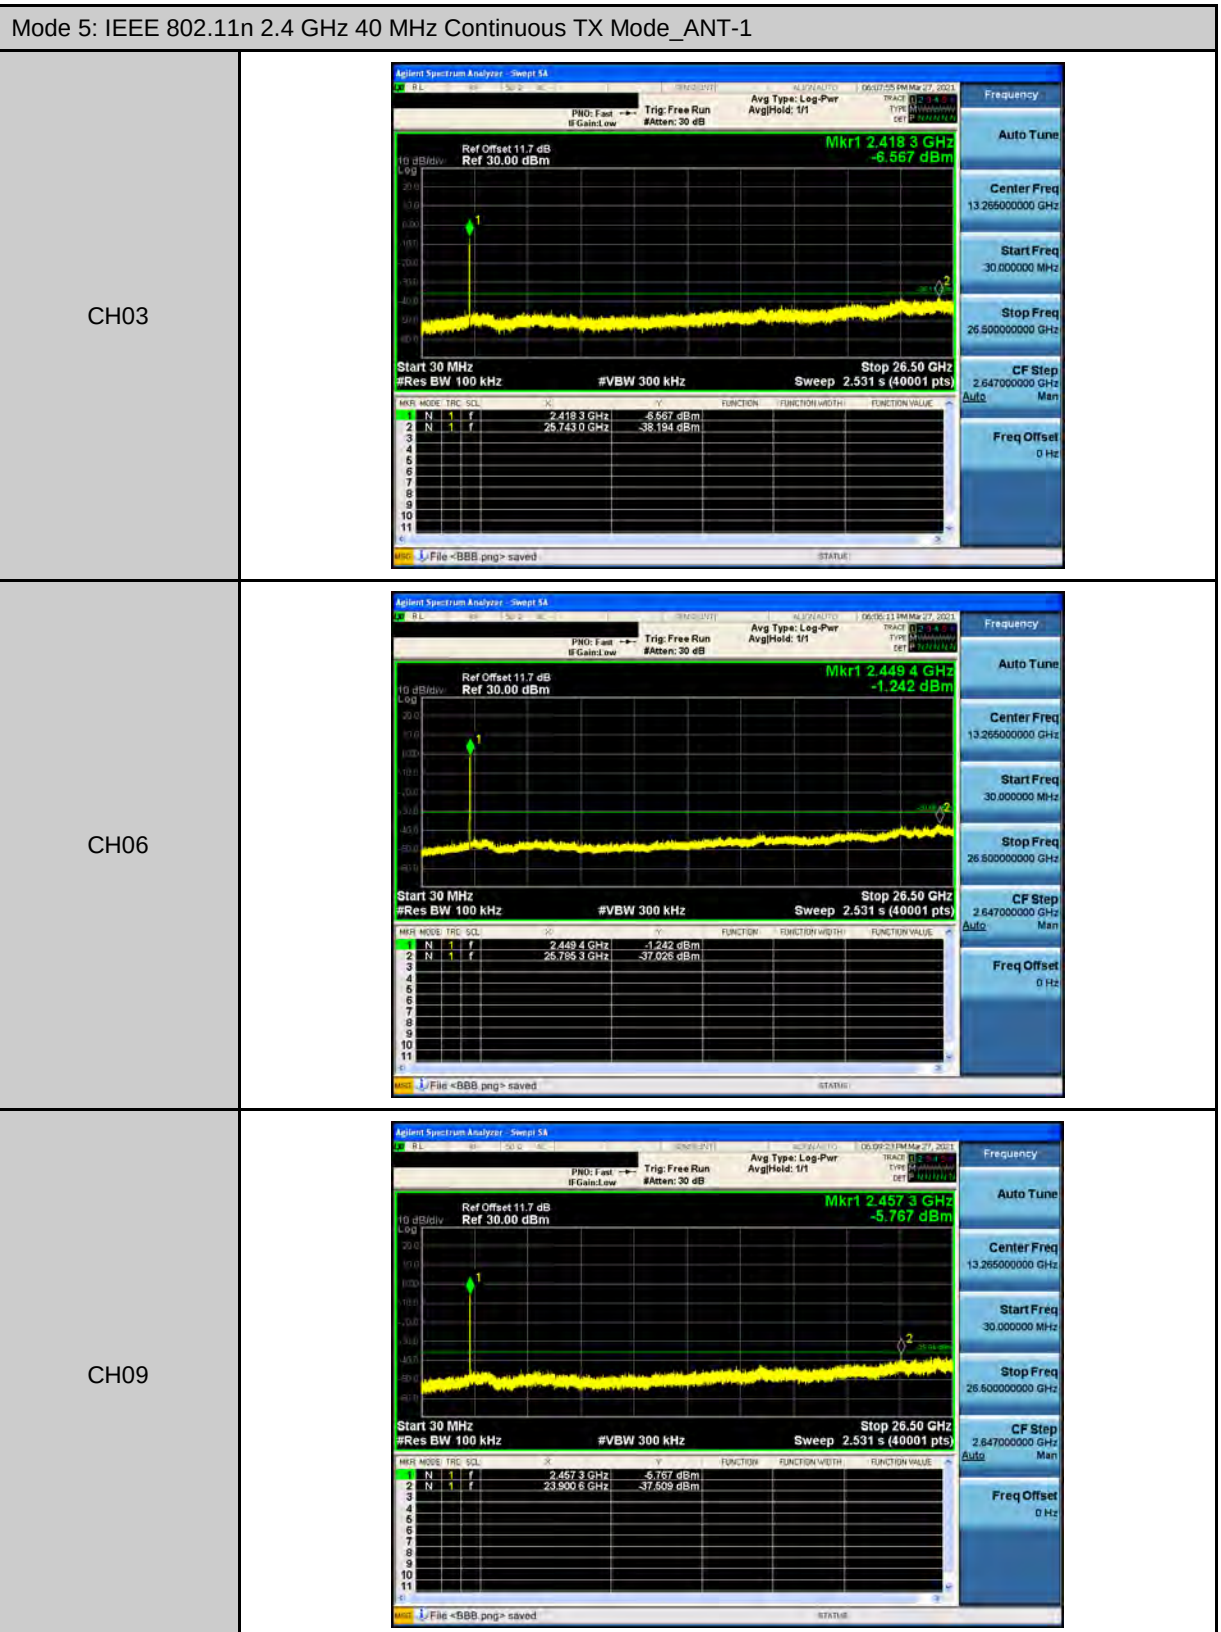



Reference level


Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode_ANT-0	
CH01	
CH06	
CH11	

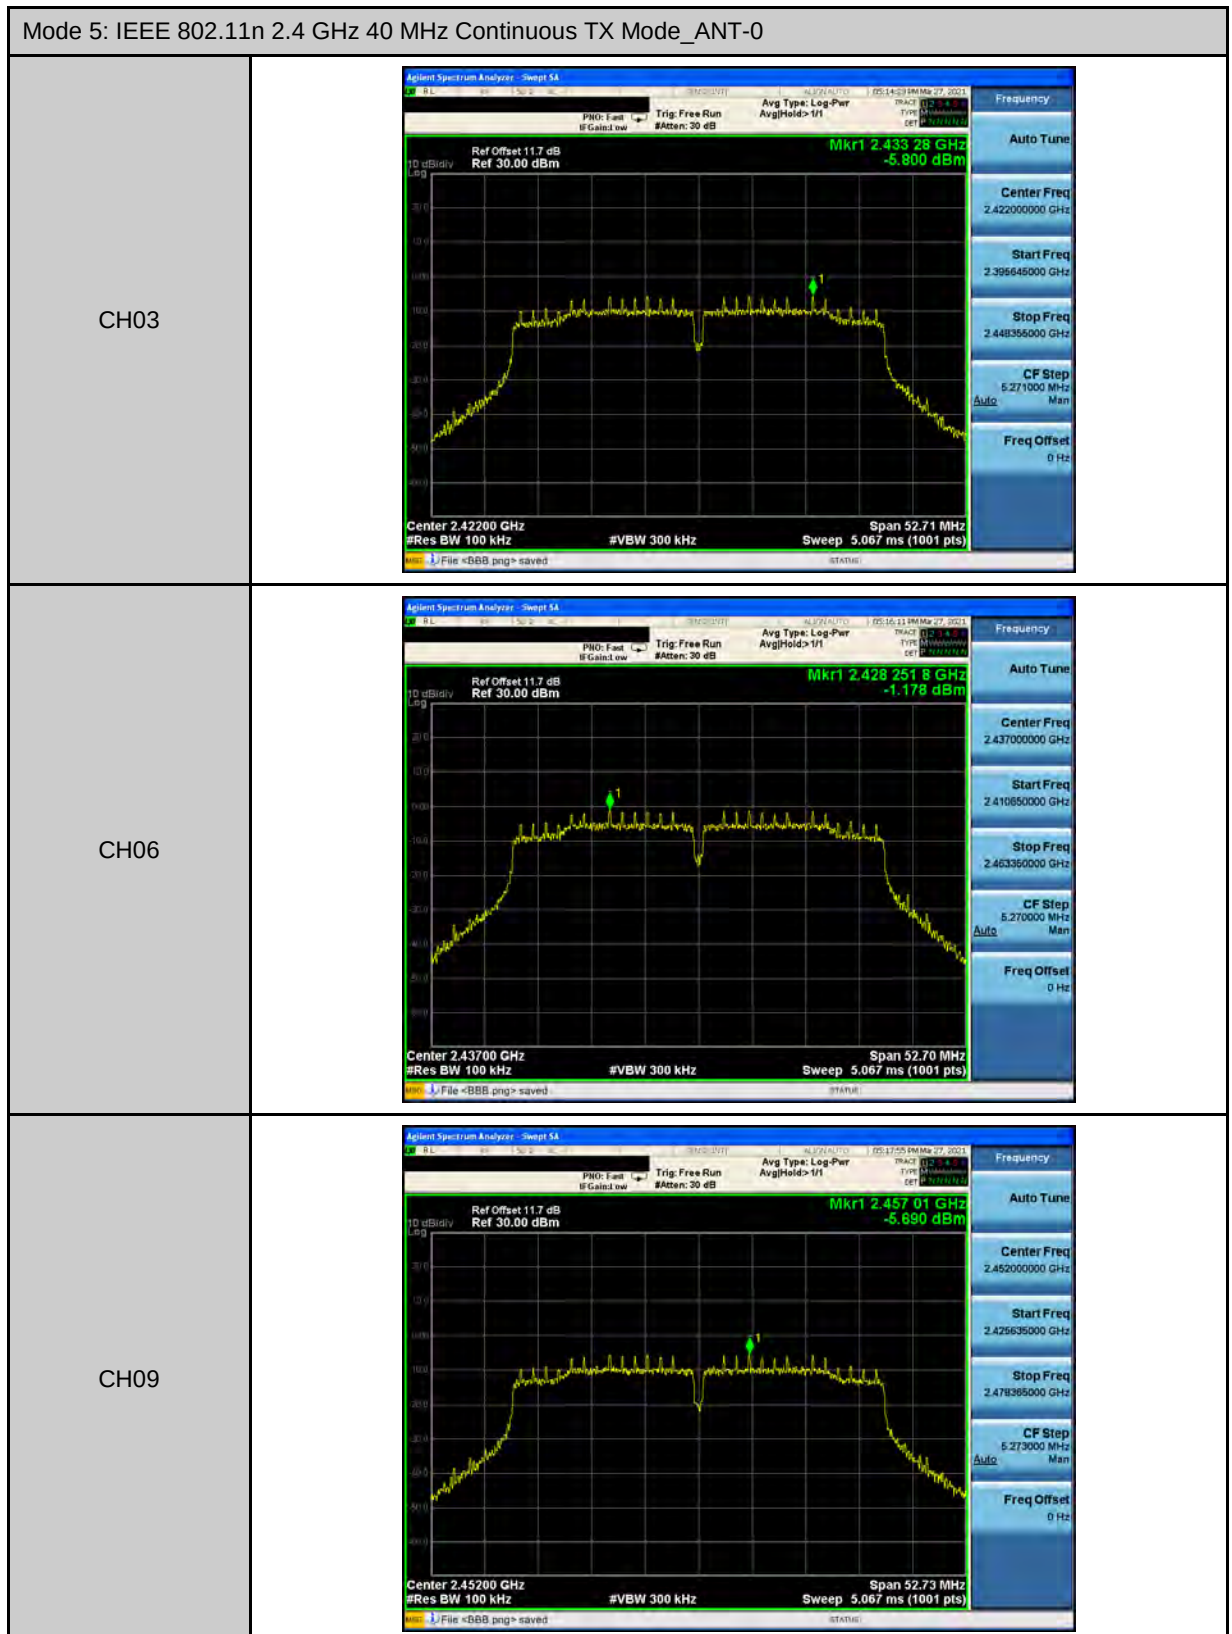

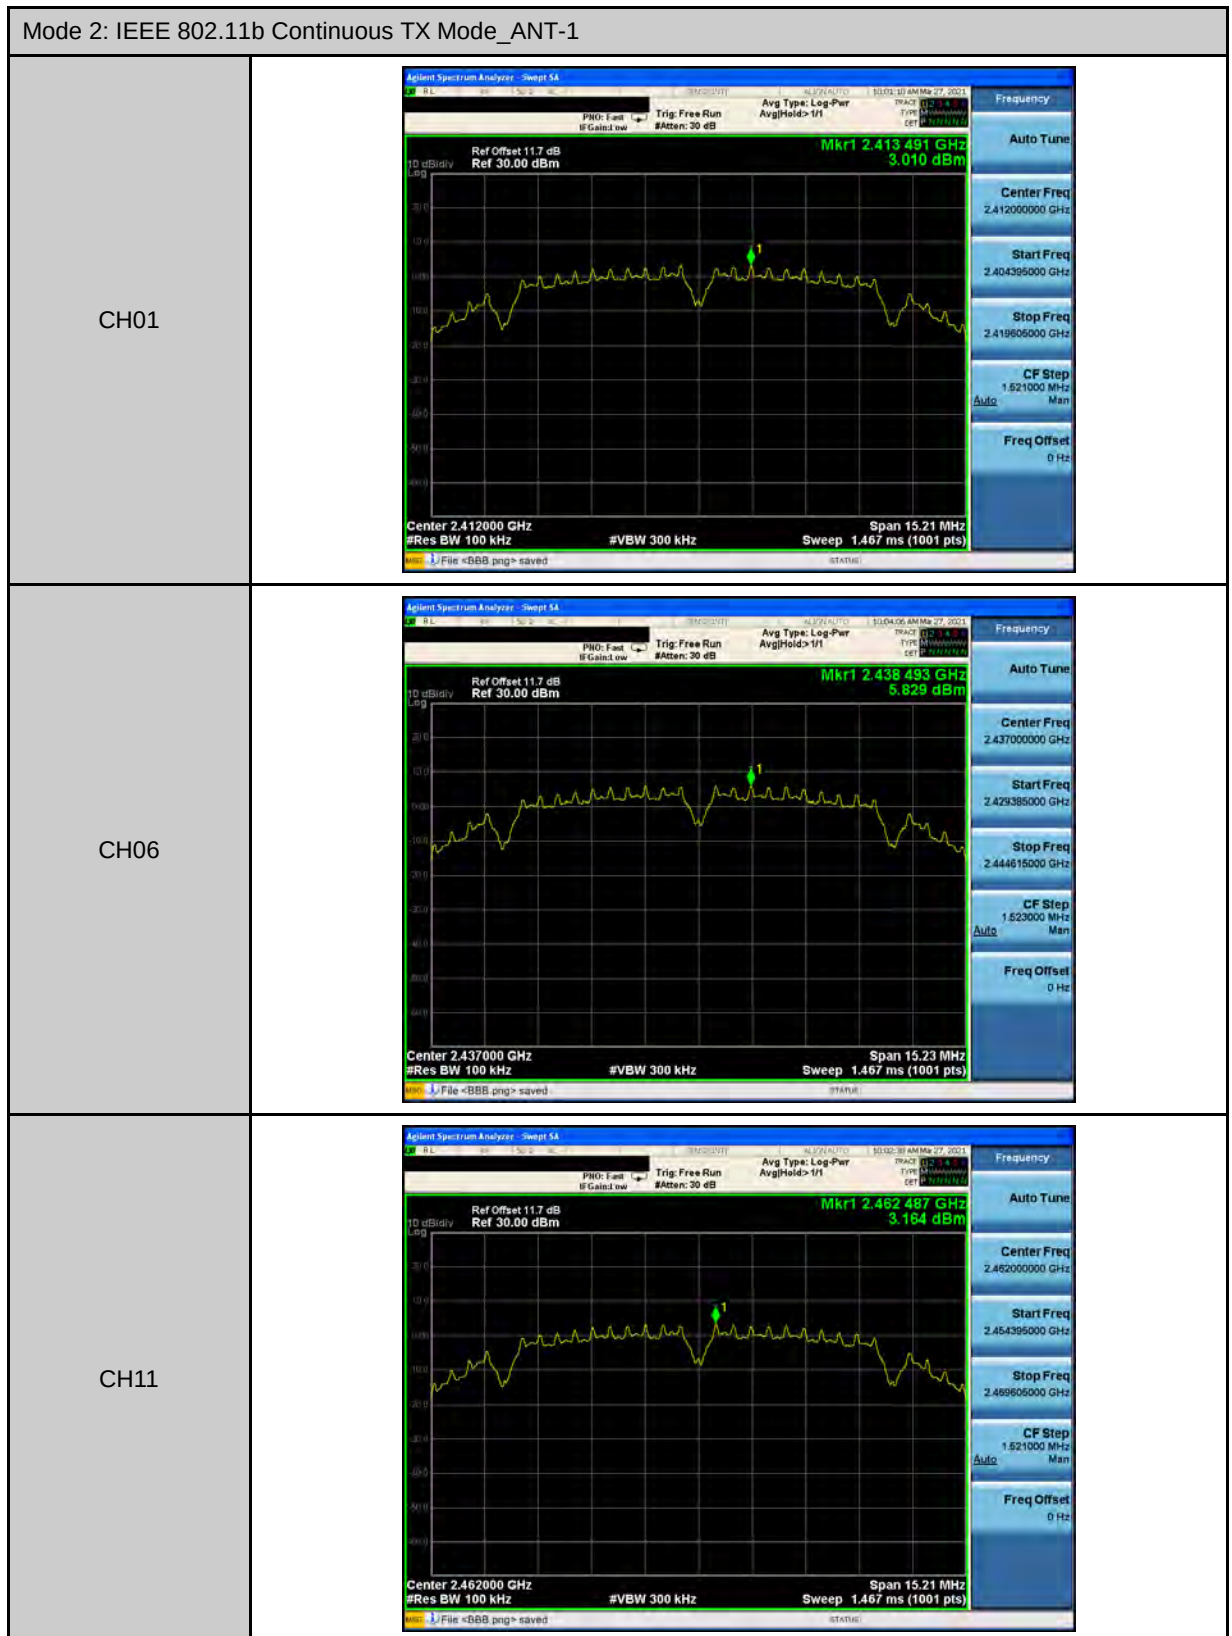

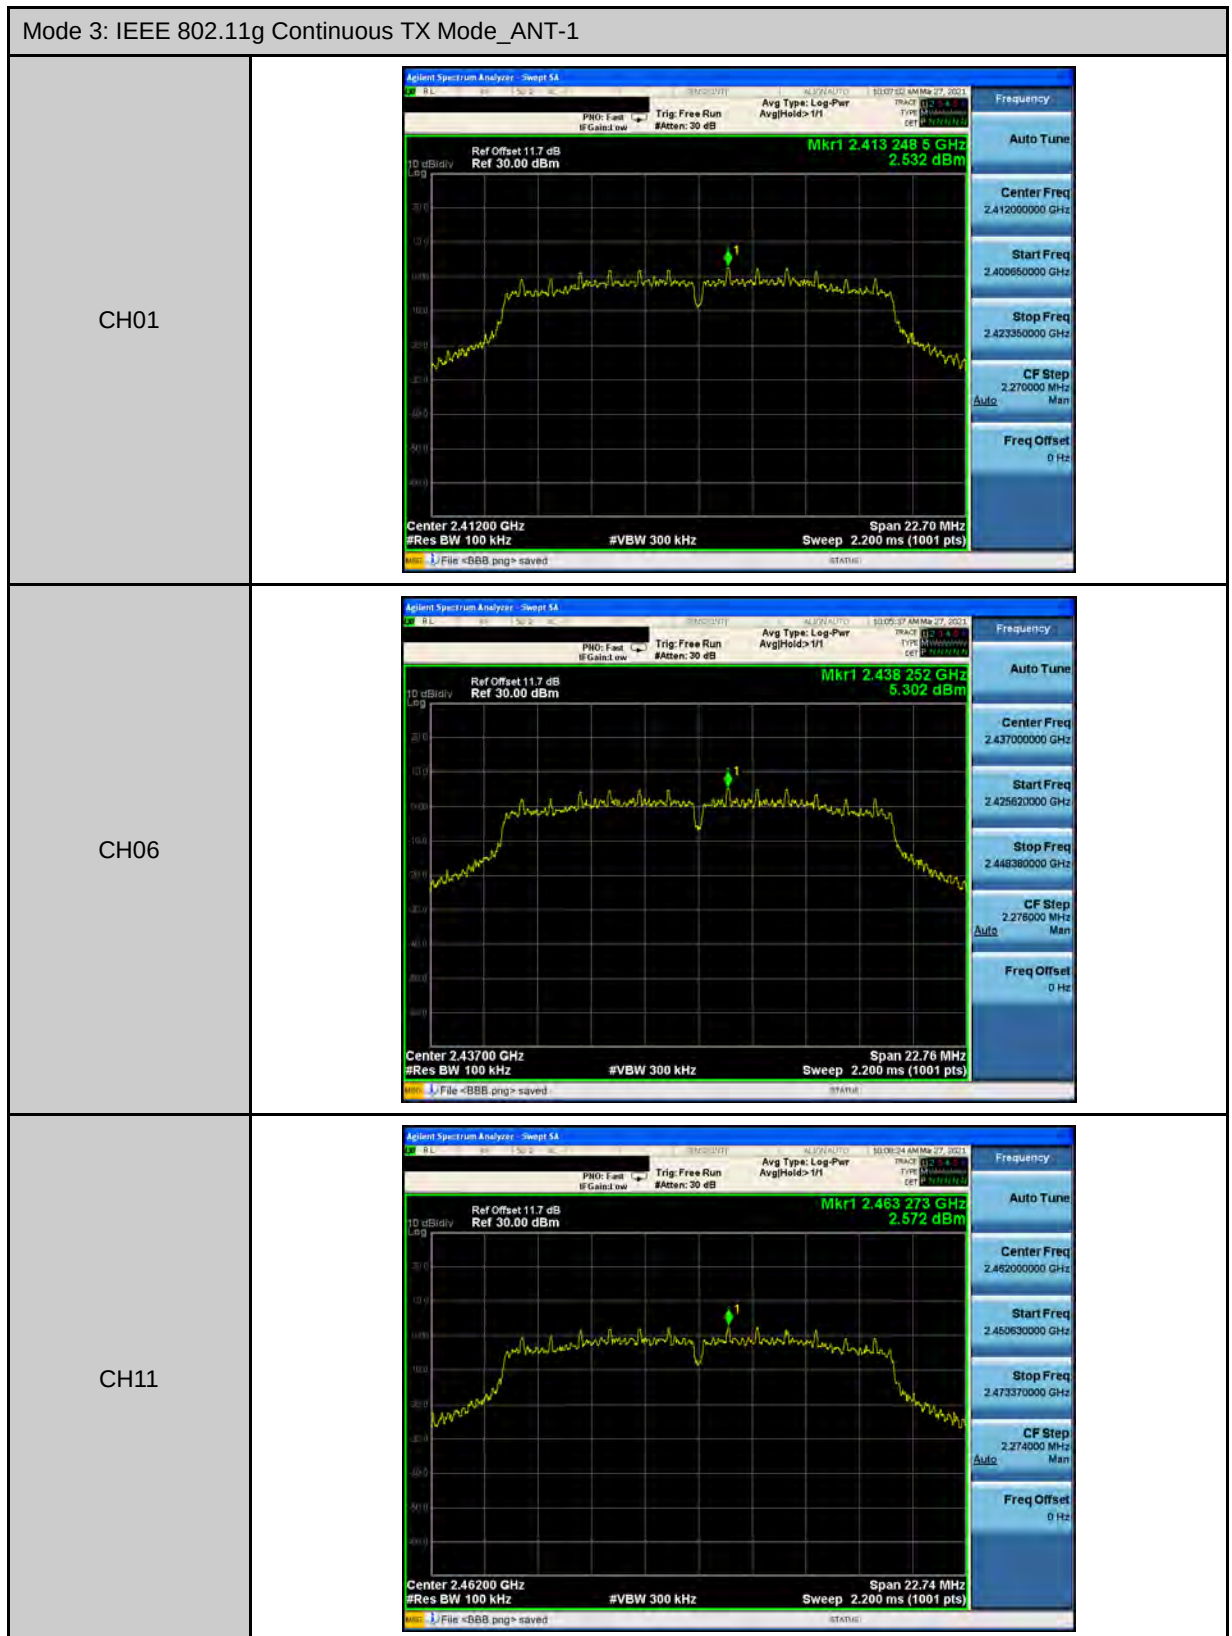

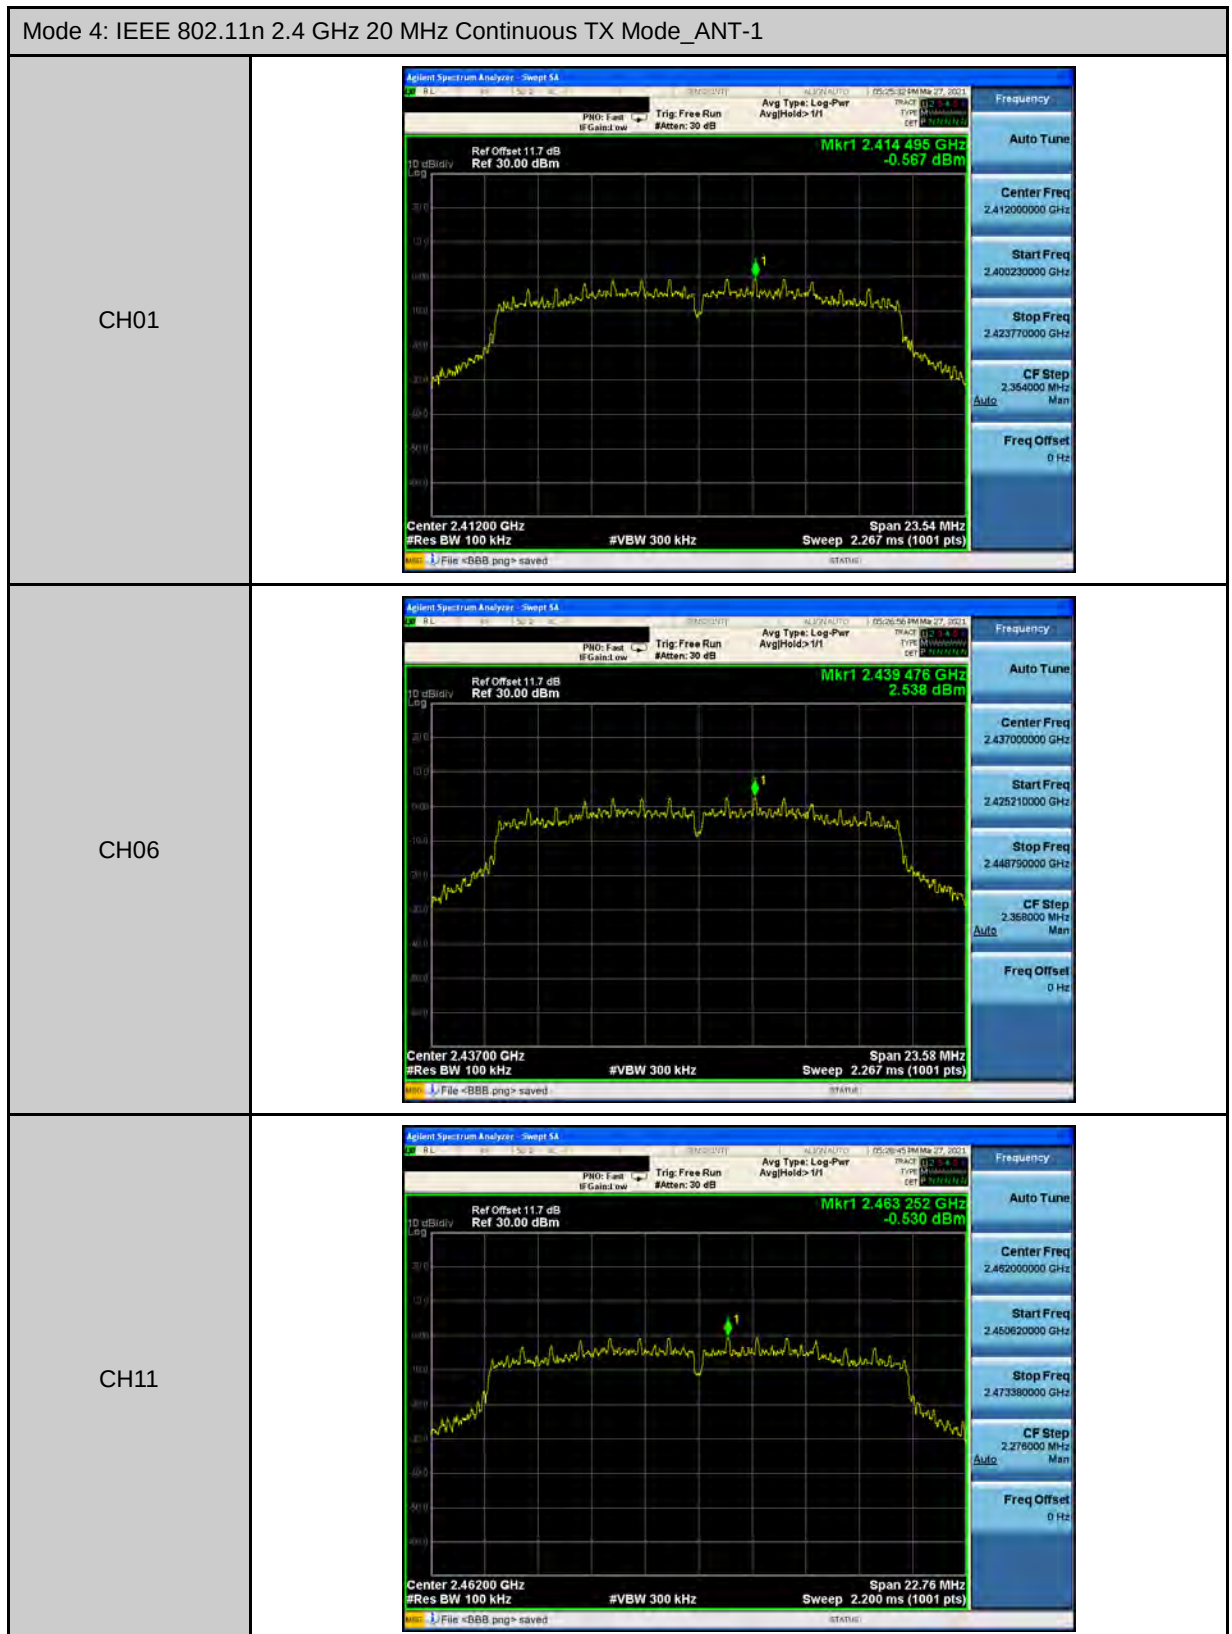


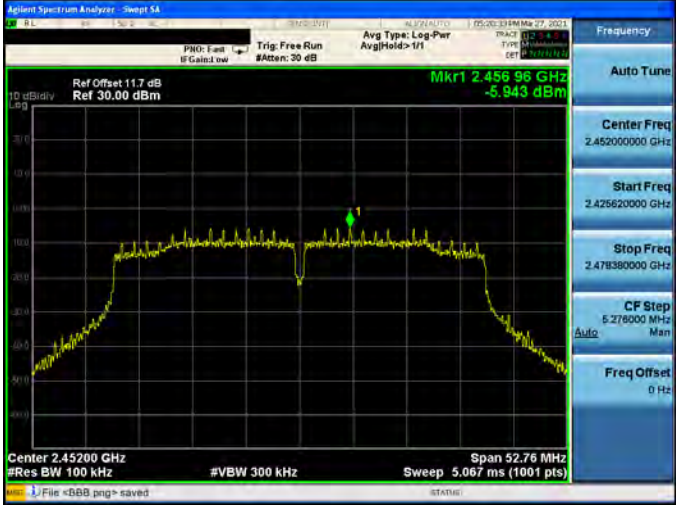Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode_ANT-1	
CH03	
CH06	
CH09	


Conducted Band Edge


Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode_ANT-0


CH01

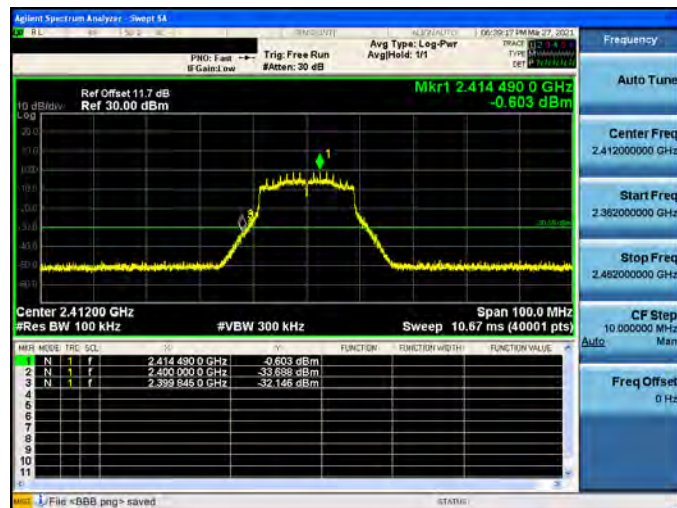

CH11

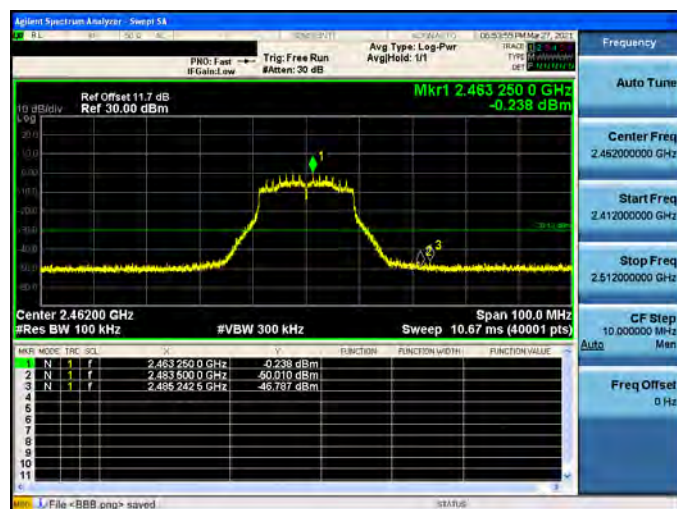


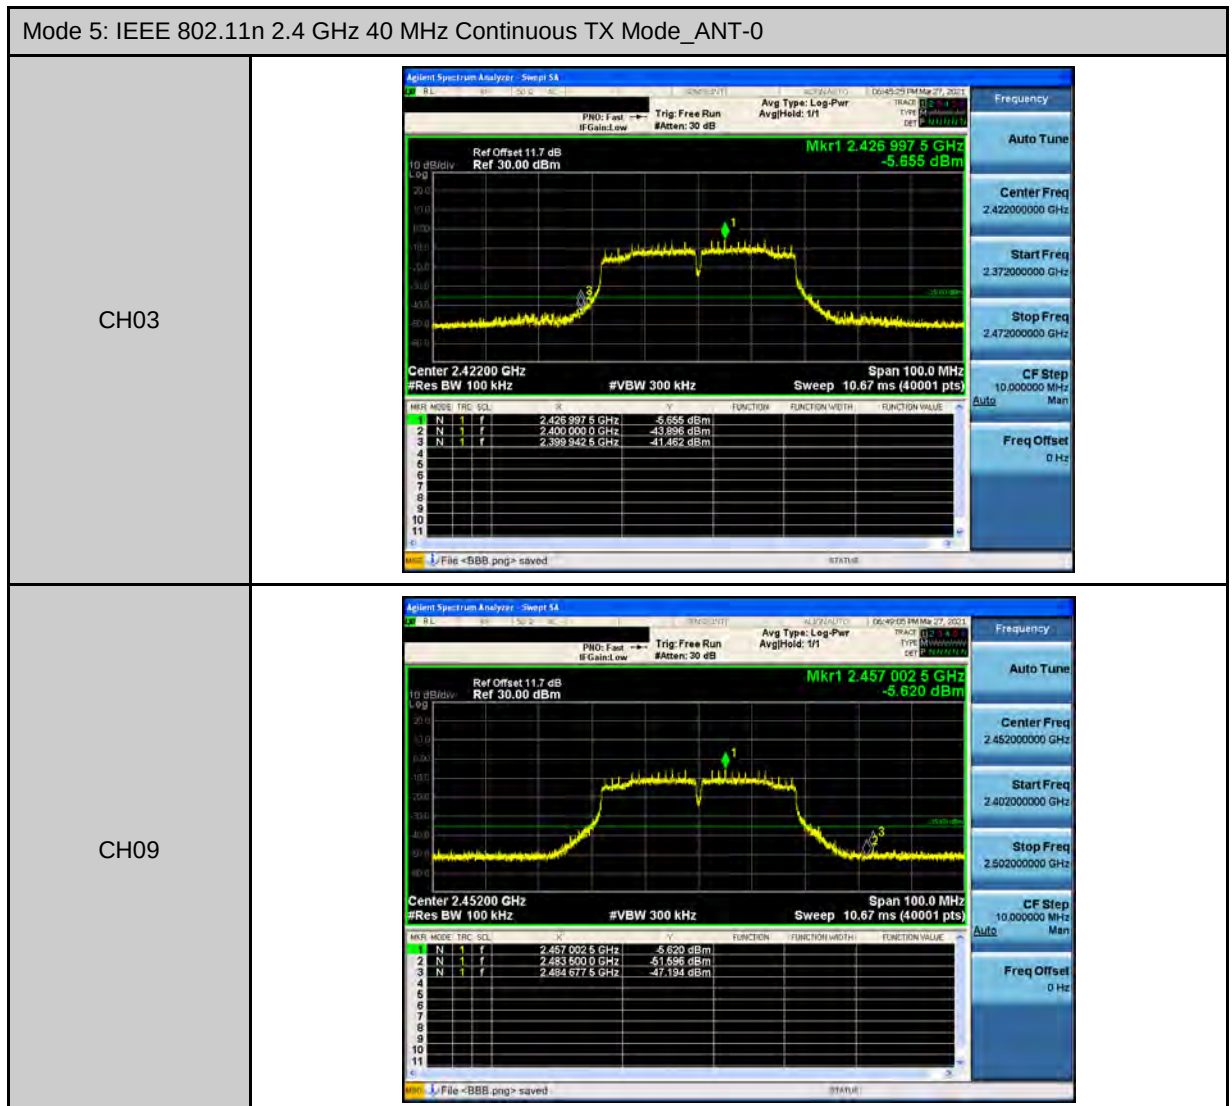

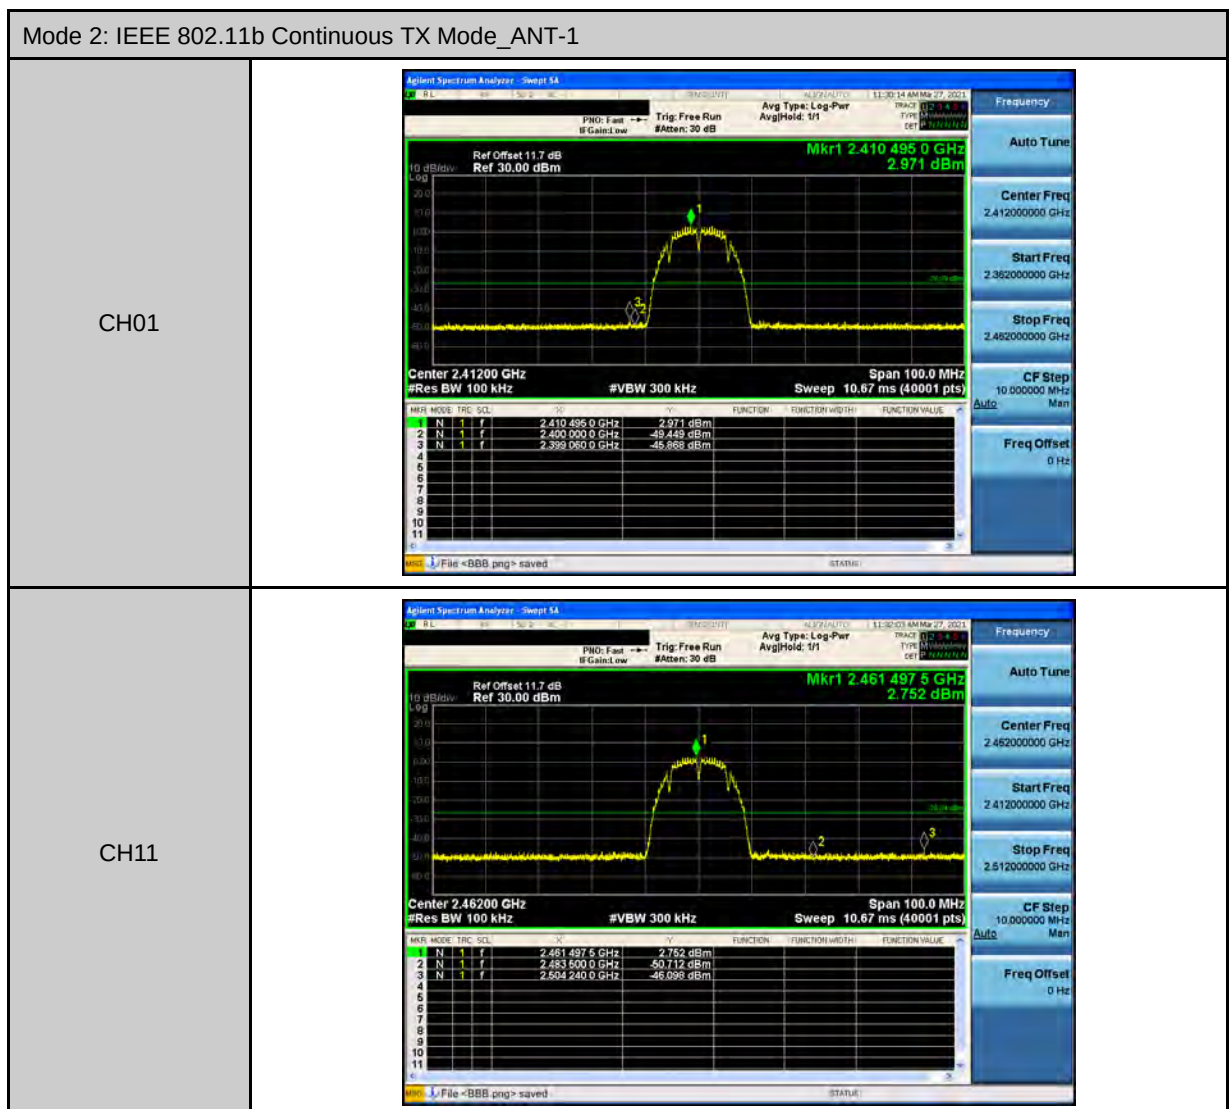



Mode 3: IEEE 802.11g Continuous TX Mode_ANT-1


CH01

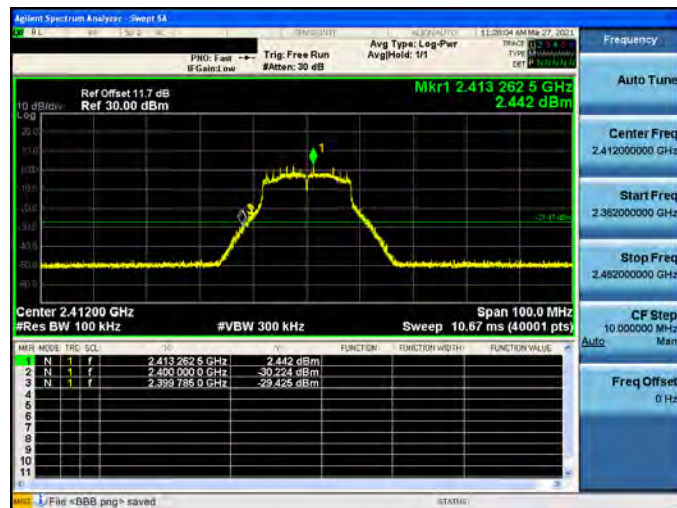

CH11

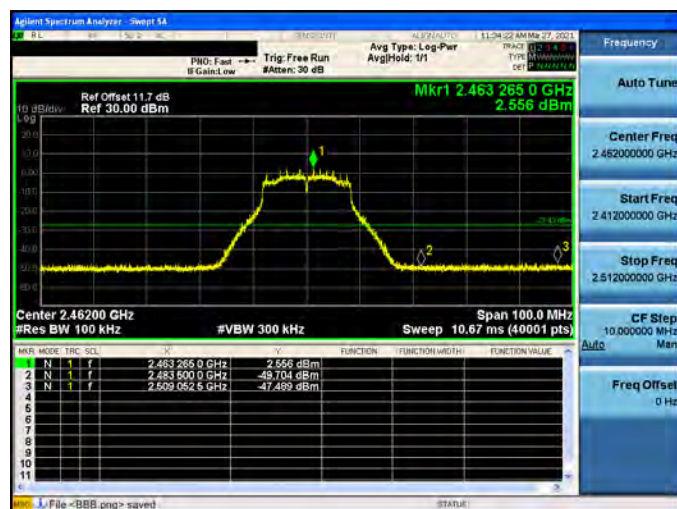


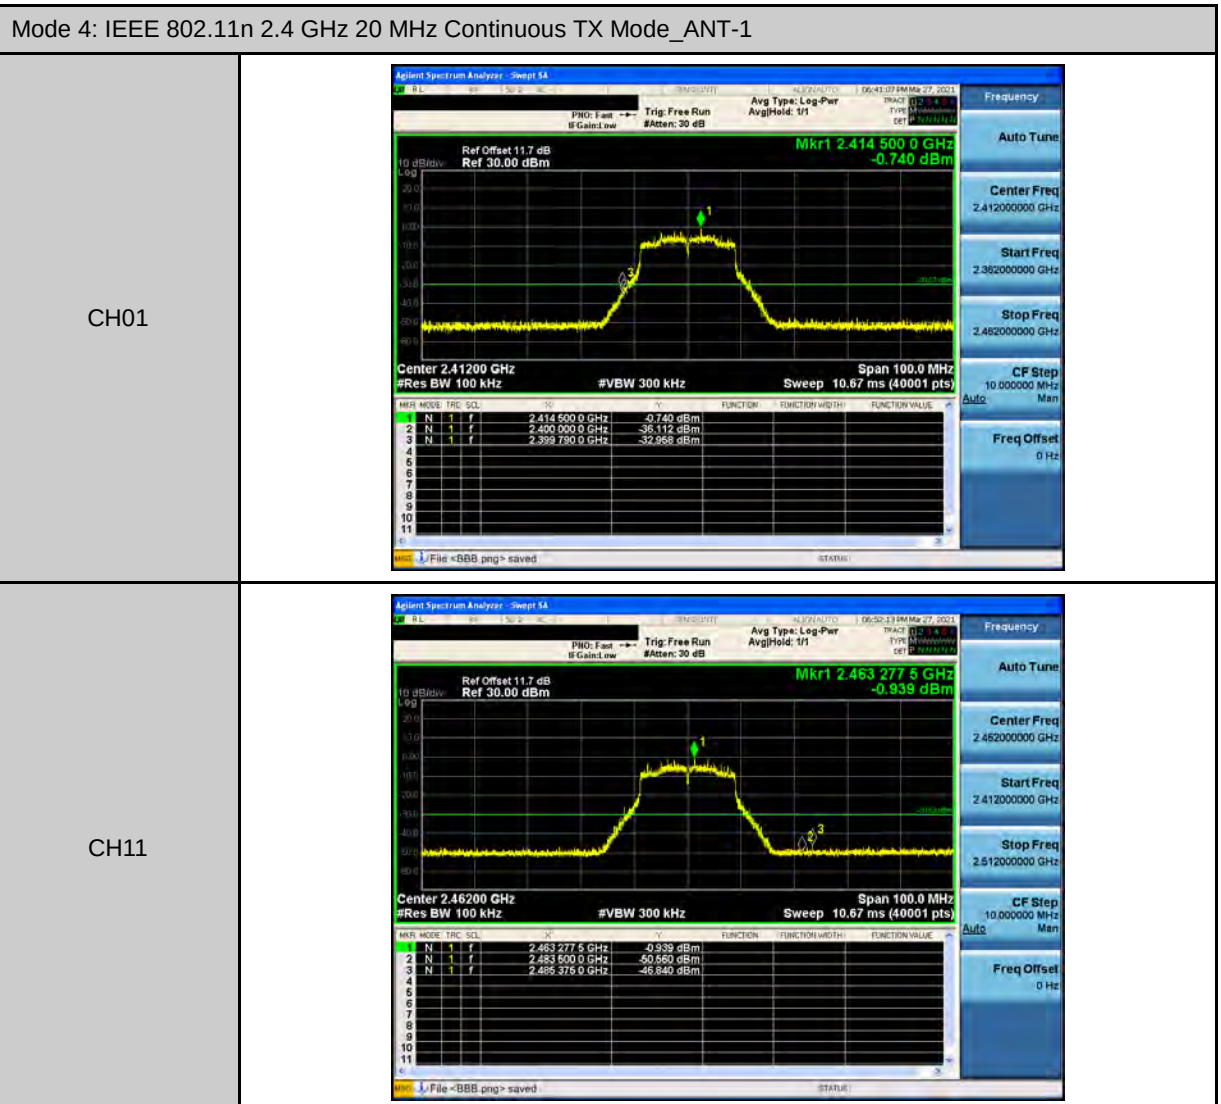


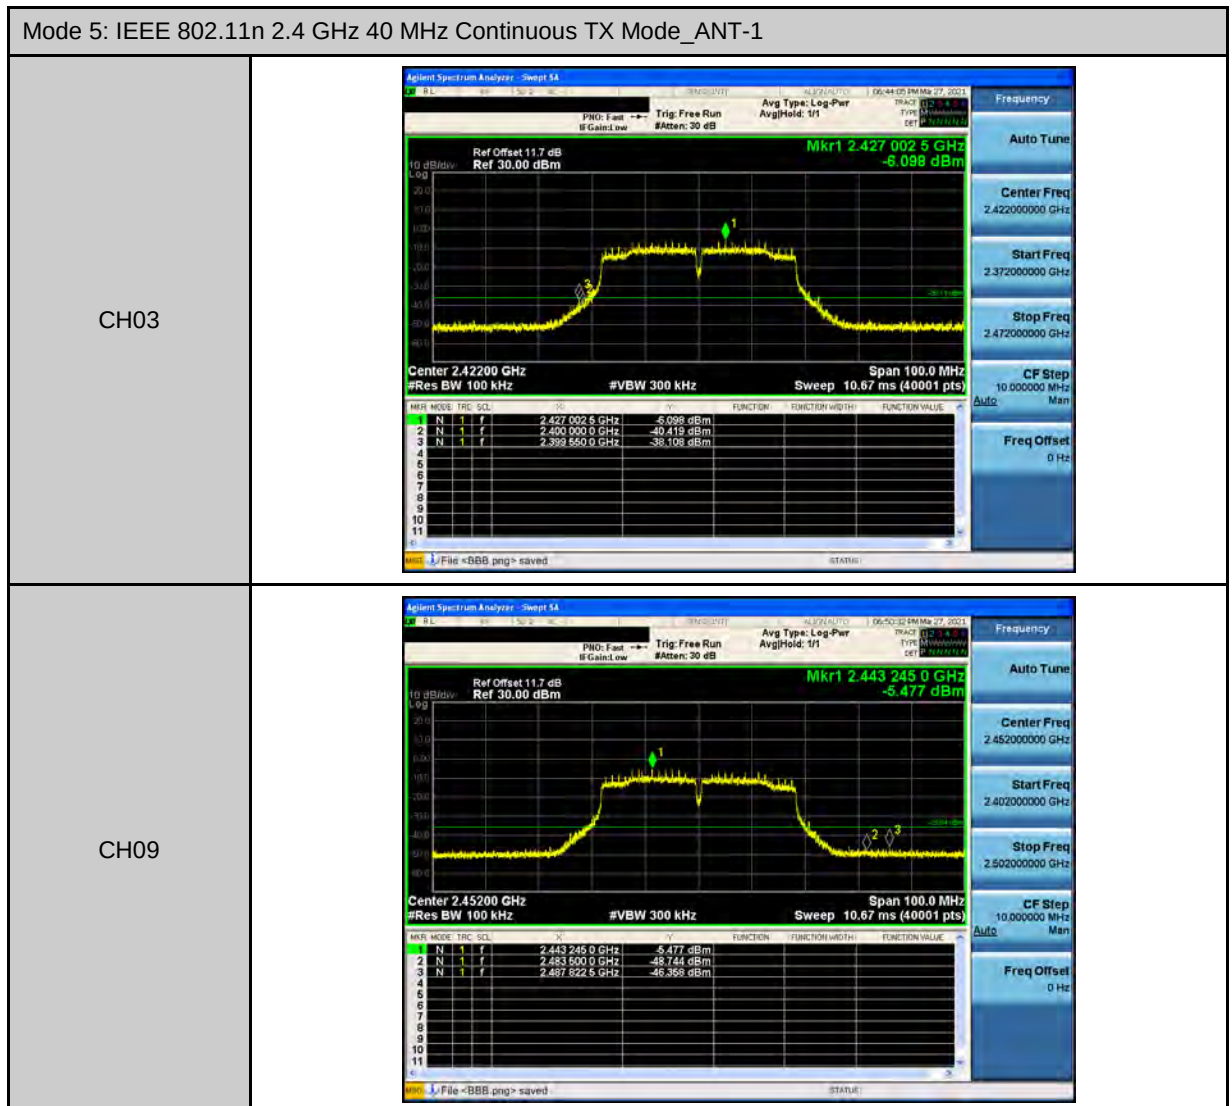


6 dB Bandwidth

操作模式	頻道	量測值 (kHz)		限制值 (kHz)
		ANT-0	ANT-1	
Mode 2	CH01	---	10140	≥ 500
	CH06	---	10150	≥ 500
	CH11	---	10140	≥ 500
Mode 3	CH01	---	15130	≥ 500
	CH06	---	15170	≥ 500
	CH11	---	15160	≥ 500
Mode 4	CH01	15170	15690	≥ 500
	CH06	15130	15720	≥ 500
	CH11	15170	15170	≥ 500
Mode 5	CH03	35140	35150	≥ 500
	CH06	35130	35170	≥ 500
	CH09	35150	35170	≥ 500



Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode_ANT-0	
CH01	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Trig: Free Run AvgHold: 1/1 Radio Device: BTS Ref Offset 11.7 dB Ref 30.00 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 17.610 MHz Total Power 17.0 dBm Transmit Freq Error 6.711 kHz OBW Power 99.00 % x dB Bandwidth 15.17 MHz x dB -6.00 dB File <BBB.png> saved
CH06	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Trig: Free Run AvgHold: 1/1 Radio Device: BTS Ref Offset 11.7 dB Ref 30.00 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 17.594 MHz Total Power 19.6 dBm Transmit Freq Error 4.614 kHz OBW Power 99.00 % x dB Bandwidth 15.13 MHz x dB -6.00 dB File <BBB.png> saved
CH11	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Trig: Free Run AvgHold: 1/1 Radio Device: BTS Ref Offset 11.7 dB Ref 30.00 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 17.600 MHz Total Power 17.1 dBm Transmit Freq Error -4.883 kHz OBW Power 99.00 % x dB Bandwidth 15.17 MHz x dB -6.00 dB File name not found; D:\User_My_Documents\InstrumentMy_...

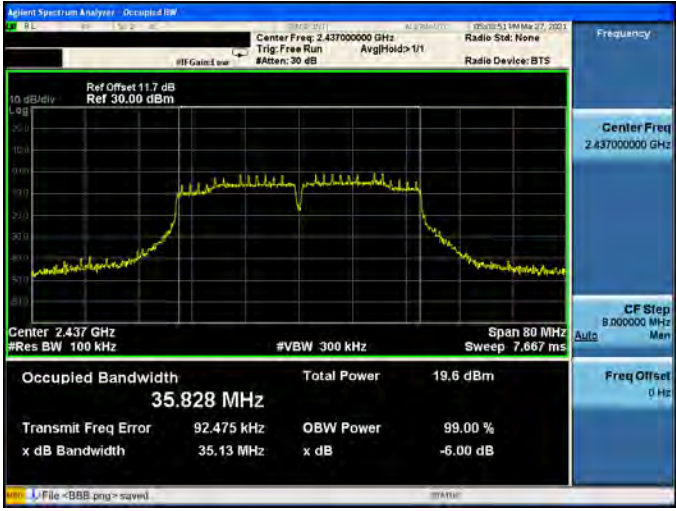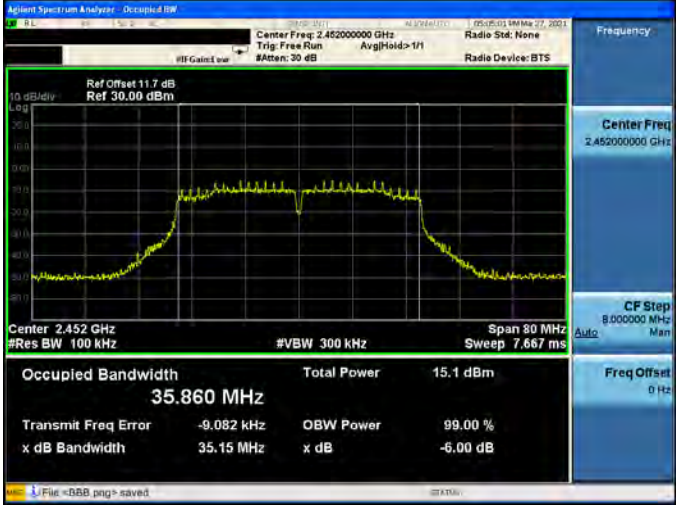Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode_ANT-0	
CH03	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.42200000 GHz Span: 80 MHz Res BW: 100 kHz Sweep: 7.667 ms Ref Offset: 11.7 dB Ref: 30.00 dBm Occupied Bandwidth: 35.866 MHz Total Power: 15.0 dBm Transmit Freq Error: 22.213 kHz OBW Power: 99.00 % x dB Bandwidth: 35.14 MHz x dB: -6.00 dB
CH06	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Span: 80 MHz Res BW: 100 kHz Sweep: 7.667 ms Ref Offset: 11.7 dB Ref: 30.00 dBm Occupied Bandwidth: 35.828 MHz Total Power: 19.6 dBm Transmit Freq Error: 92.475 kHz OBW Power: 99.00 % x dB Bandwidth: 35.13 MHz x dB: -6.00 dB
CH09	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.45200000 GHz Span: 80 MHz Res BW: 100 kHz Sweep: 7.667 ms Ref Offset: 11.7 dB Ref: 30.00 dBm Occupied Bandwidth: 35.860 MHz Total Power: 15.1 dBm Transmit Freq Error: -9.082 kHz OBW Power: 99.00 % x dB Bandwidth: 35.15 MHz x dB: -6.00 dB

Mode 2: IEEE 802.11b Continuous TX Mode_ANT-1	
CH01	
CH06	
CH11	

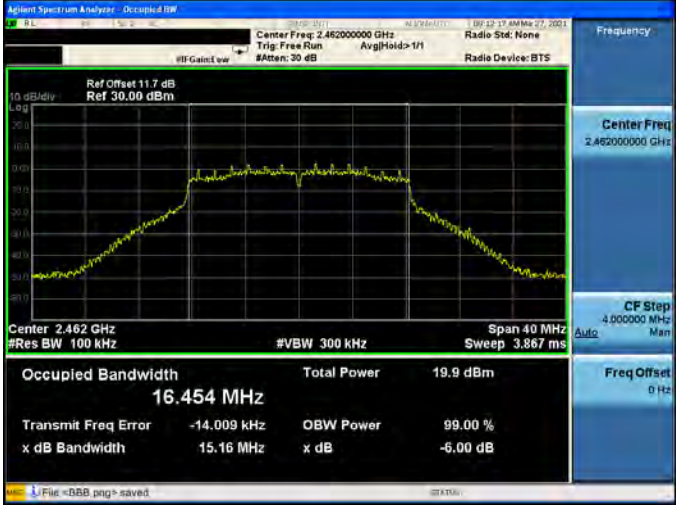
Mode 3: IEEE 802.11g Continuous TX Mode_ANT-1	
CH01	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Trig: Free Run AvgHold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.7 dB Ref 30.00 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 16.447 MHz Total Power 19.7 dBm Transmit Freq Error 9.927 kHz OBW Power 99.00 % x dB Bandwidth 15.13 MHz x dB -6.00 dB File <BBB.png> saved
CH06	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Trig: Free Run AvgHold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.7 dB Ref 30.00 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 16.506 MHz Total Power 23.0 dBm Transmit Freq Error -7.237 kHz OBW Power 99.00 % x dB Bandwidth 15.17 MHz x dB -6.00 dB File <BBB.png> saved
CH11	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Trig: Free Run AvgHold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.7 dB Ref 30.00 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 16.454 MHz Total Power 19.9 dBm Transmit Freq Error -14.009 kHz OBW Power 99.00 % x dB Bandwidth 15.16 MHz x dB -6.00 dB File <BBB.png> saved




Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode_ANT-1	
CH01	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Trig: Free Run #Atten: 30 dB Radio Device: BTS Ref Offset 11.7 dB Ref 30.00 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 17.618 MHz Total Power 16.9 dBm Transmit Freq Error 11.909 kHz OBW Power 99.00 % x dB Bandwidth 15.69 MHz x dB -6.00 dB File name not found; D:\User_My_Documents\InstrumentMy...
CH06	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Trig: Free Run #Atten: 30 dB Radio Device: BTS Ref Offset 11.7 dB Ref 30.00 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 17.598 MHz Total Power 19.9 dBm Transmit Freq Error -2.922 kHz OBW Power 99.00 % x dB Bandwidth 15.72 MHz x dB -6.00 dB File <BBB.png> saved
CH11	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Trig: Free Run #Atten: 30 dB Radio Device: BTS Ref Offset 11.7 dB Ref 30.00 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 17.605 MHz Total Power 17.0 dBm Transmit Freq Error -6.075 kHz OBW Power 99.00 % x dB Bandwidth 15.17 MHz x dB -6.00 dB File <BBB.png> saved

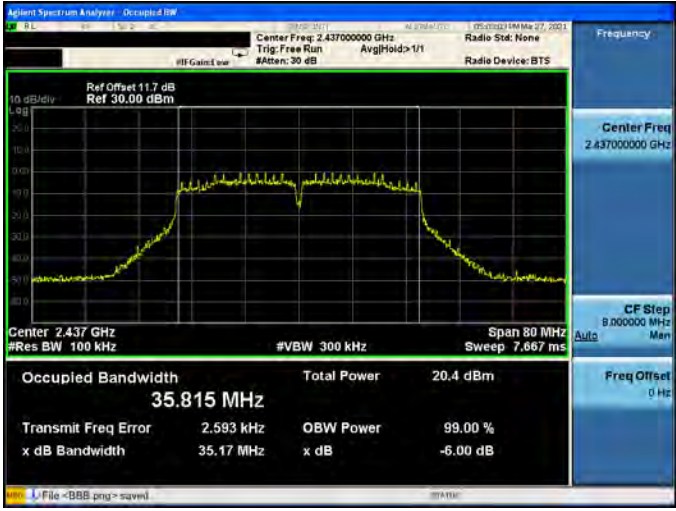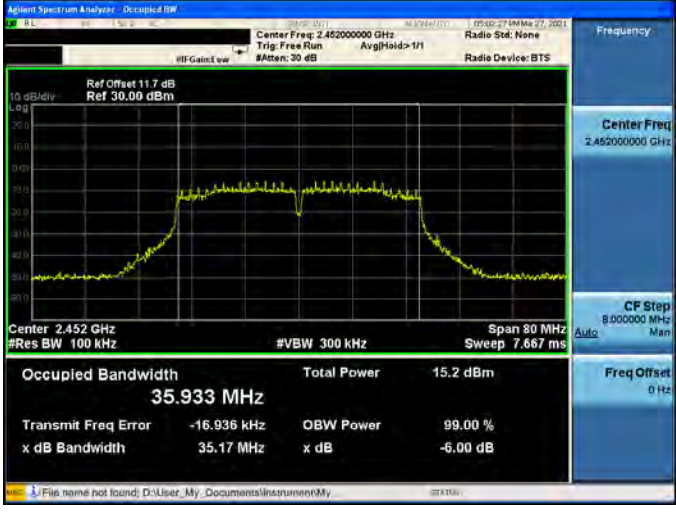
Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode_ANT-1	
CH03	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz Trig: Free Run Avg Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.7 dB Ref 30.00 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 35.840 MHz Total Power 15.3 dBm Transmit Freq Error -4.938 kHz OBW Power 99.00 % x dB Bandwidth 35.15 MHz x dB -6.00 dB File name not found; D:\User_My_Documents\InstrumentMy...
CH06	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Trig: Free Run Avg Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.7 dB Ref 30.00 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 35.815 MHz Total Power 20.4 dBm Transmit Freq Error 2.593 kHz OBW Power 99.00 % x dB Bandwidth 35.17 MHz x dB -6.00 dB File <BBB.png> saved
CH09	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.45200000 GHz Trig: Free Run Avg Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.7 dB Ref 30.00 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 35.933 MHz Total Power 15.2 dBm Transmit Freq Error -16.936 kHz OBW Power 99.00 % x dB Bandwidth 35.17 MHz x dB -6.00 dB File name not found; D:\User_My_Documents\InstrumentMy...


Maximum Power Spectral Density

操作模式	頻道	量測值 (dBm/3 kHz)		計算值 (dBm/3 kHz)	限制值 (dBm/3 kHz)
		ANT-0	ANT-1	ANT-0+1	
Mode 2	CH01	---	-10.484	---	≤ 8.00
	CH06	---	-8.325	---	≤ 8.00
	CH11	---	-10.579	---	≤ 8.00
Mode 3	CH01	---	-12.046	---	≤ 8.00
	CH06	---	-9.193	---	≤ 8.00
	CH11	---	-11.732	---	≤ 8.00
Mode 4	CH01	-15.837	-14.618	-12.175	≤ 8.00
	CH06	-12.367	-12.335	-9.341	≤ 8.00
	CH11	-16.163	-14.645	-12.328	≤ 8.00
Mode 5	CH03	-21.067	-19.124	-16.977	≤ 8.00
	CH06	-16.034	-15.717	-12.862	≤ 8.00
	CH09	-20.846	-20.314	-17.562	≤ 8.00

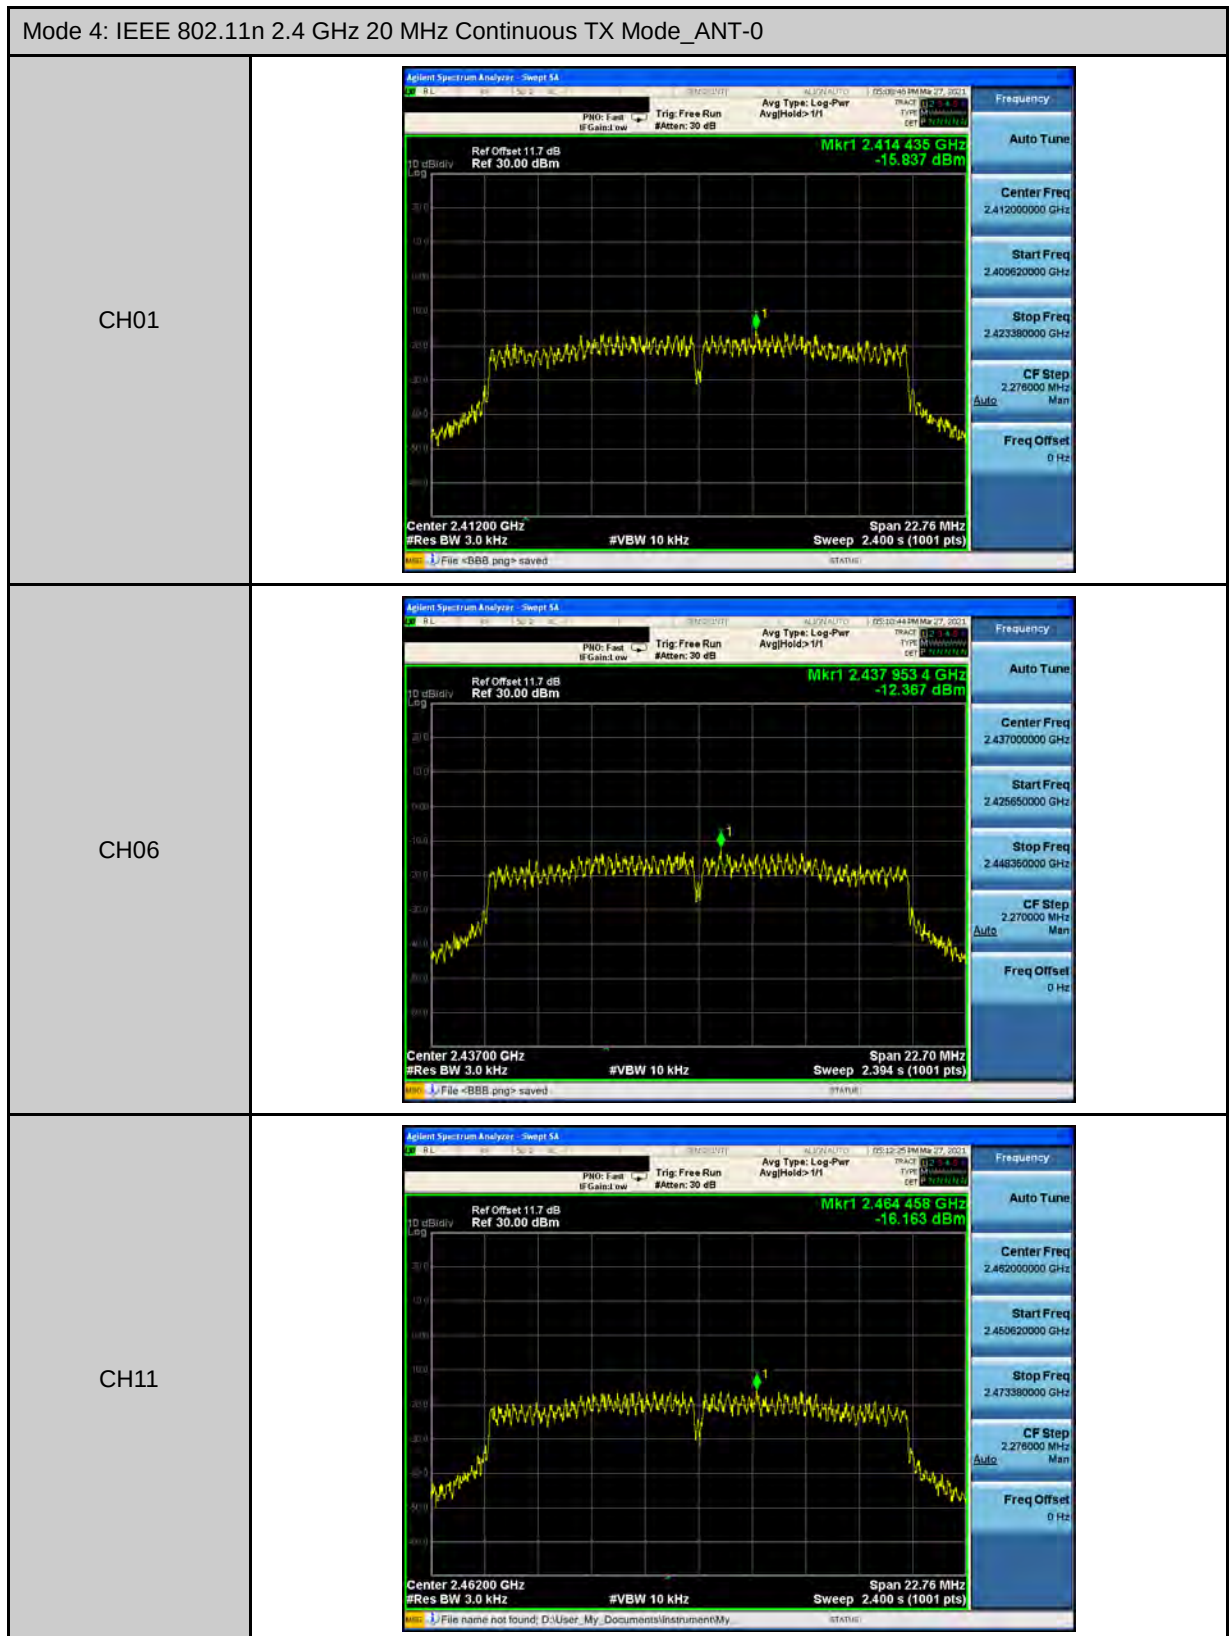

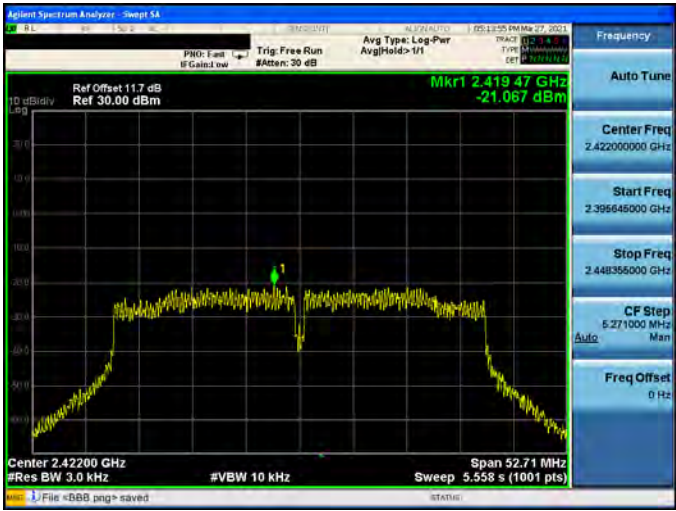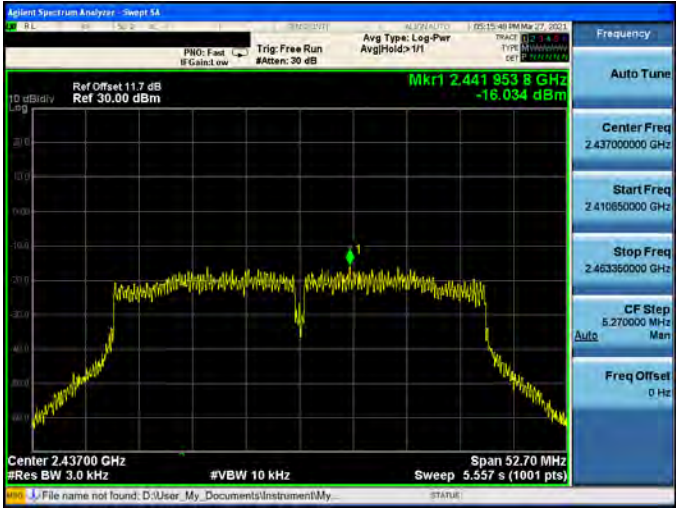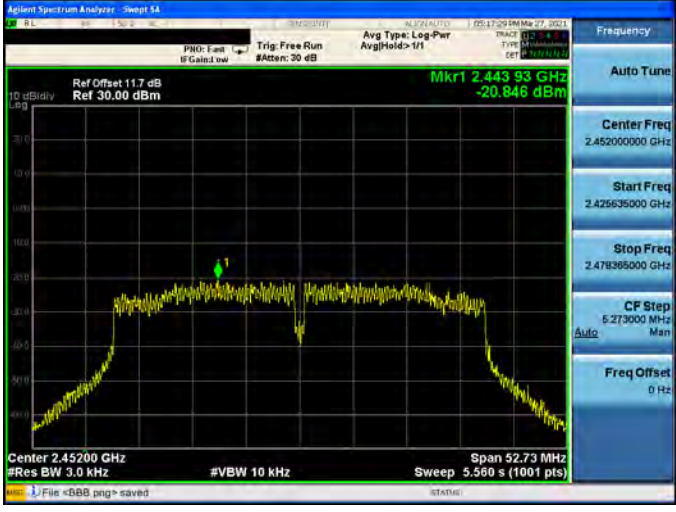
Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX Mode_ANT-0	
CH03	
CH06	
CH09	

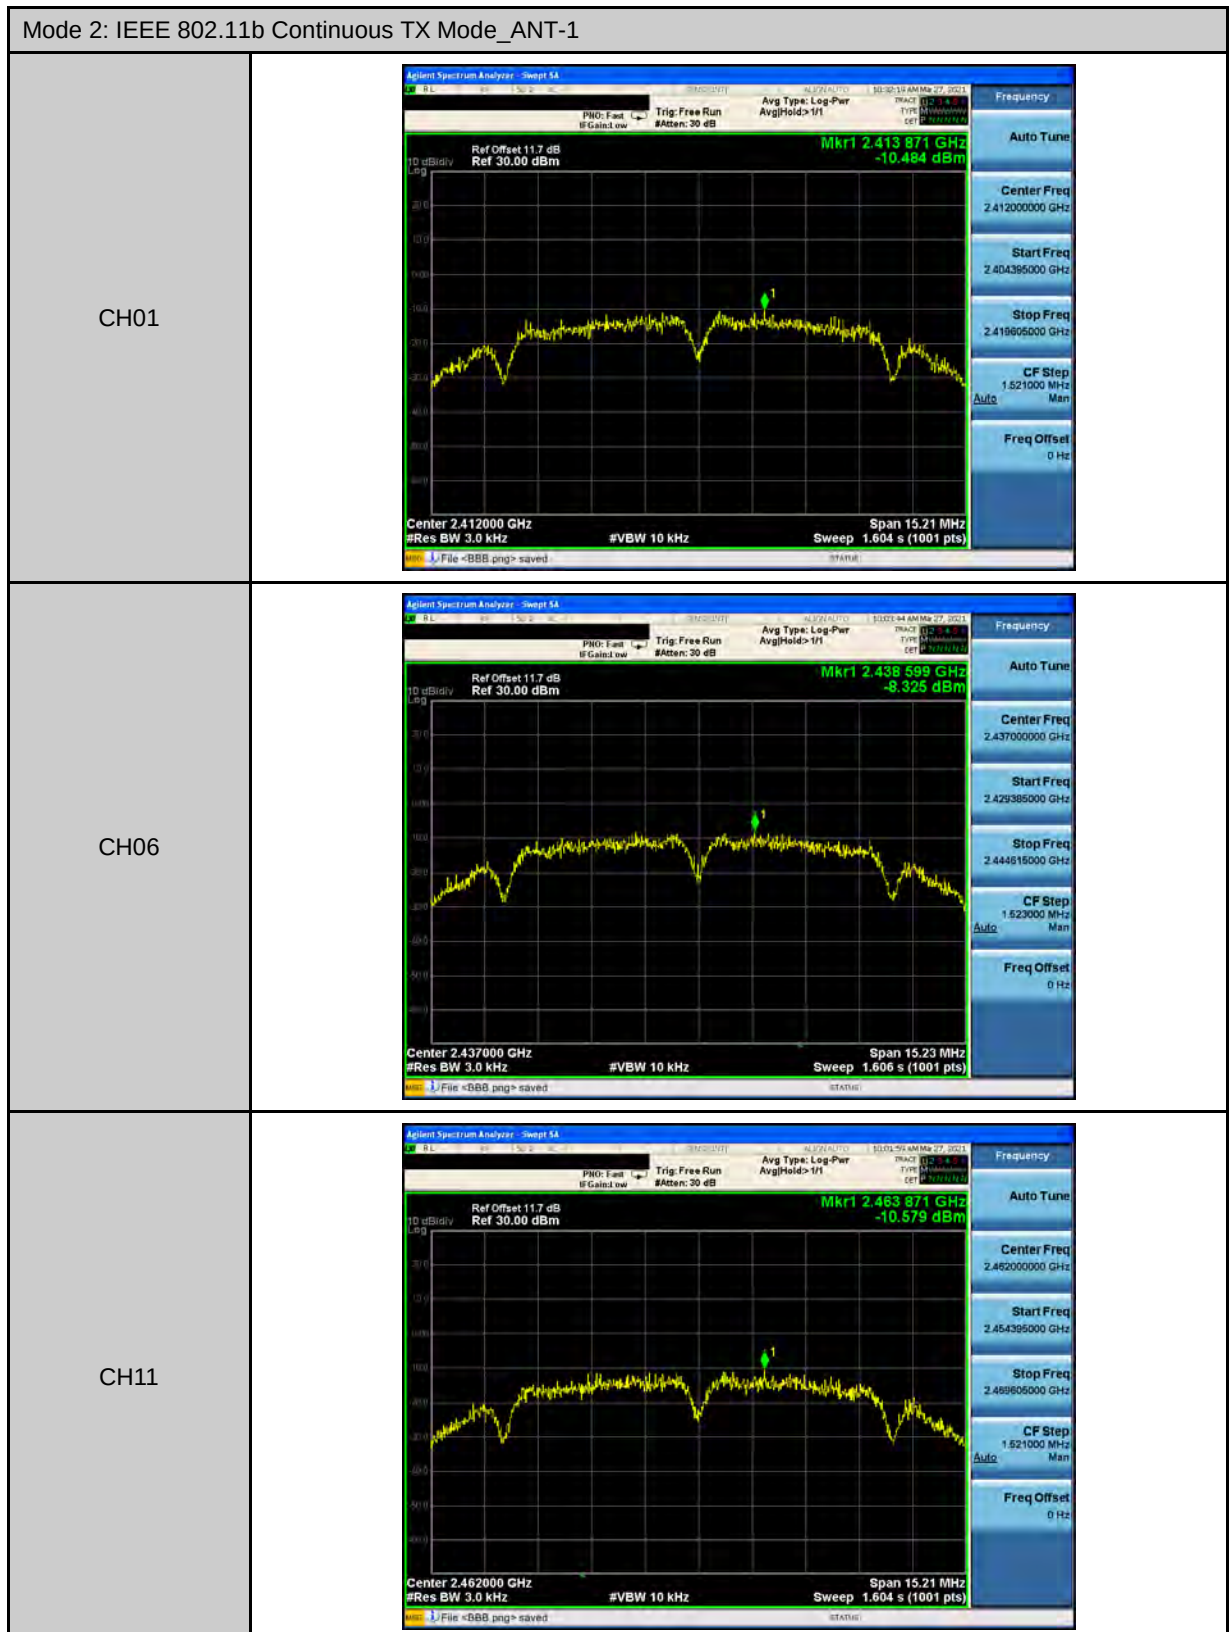

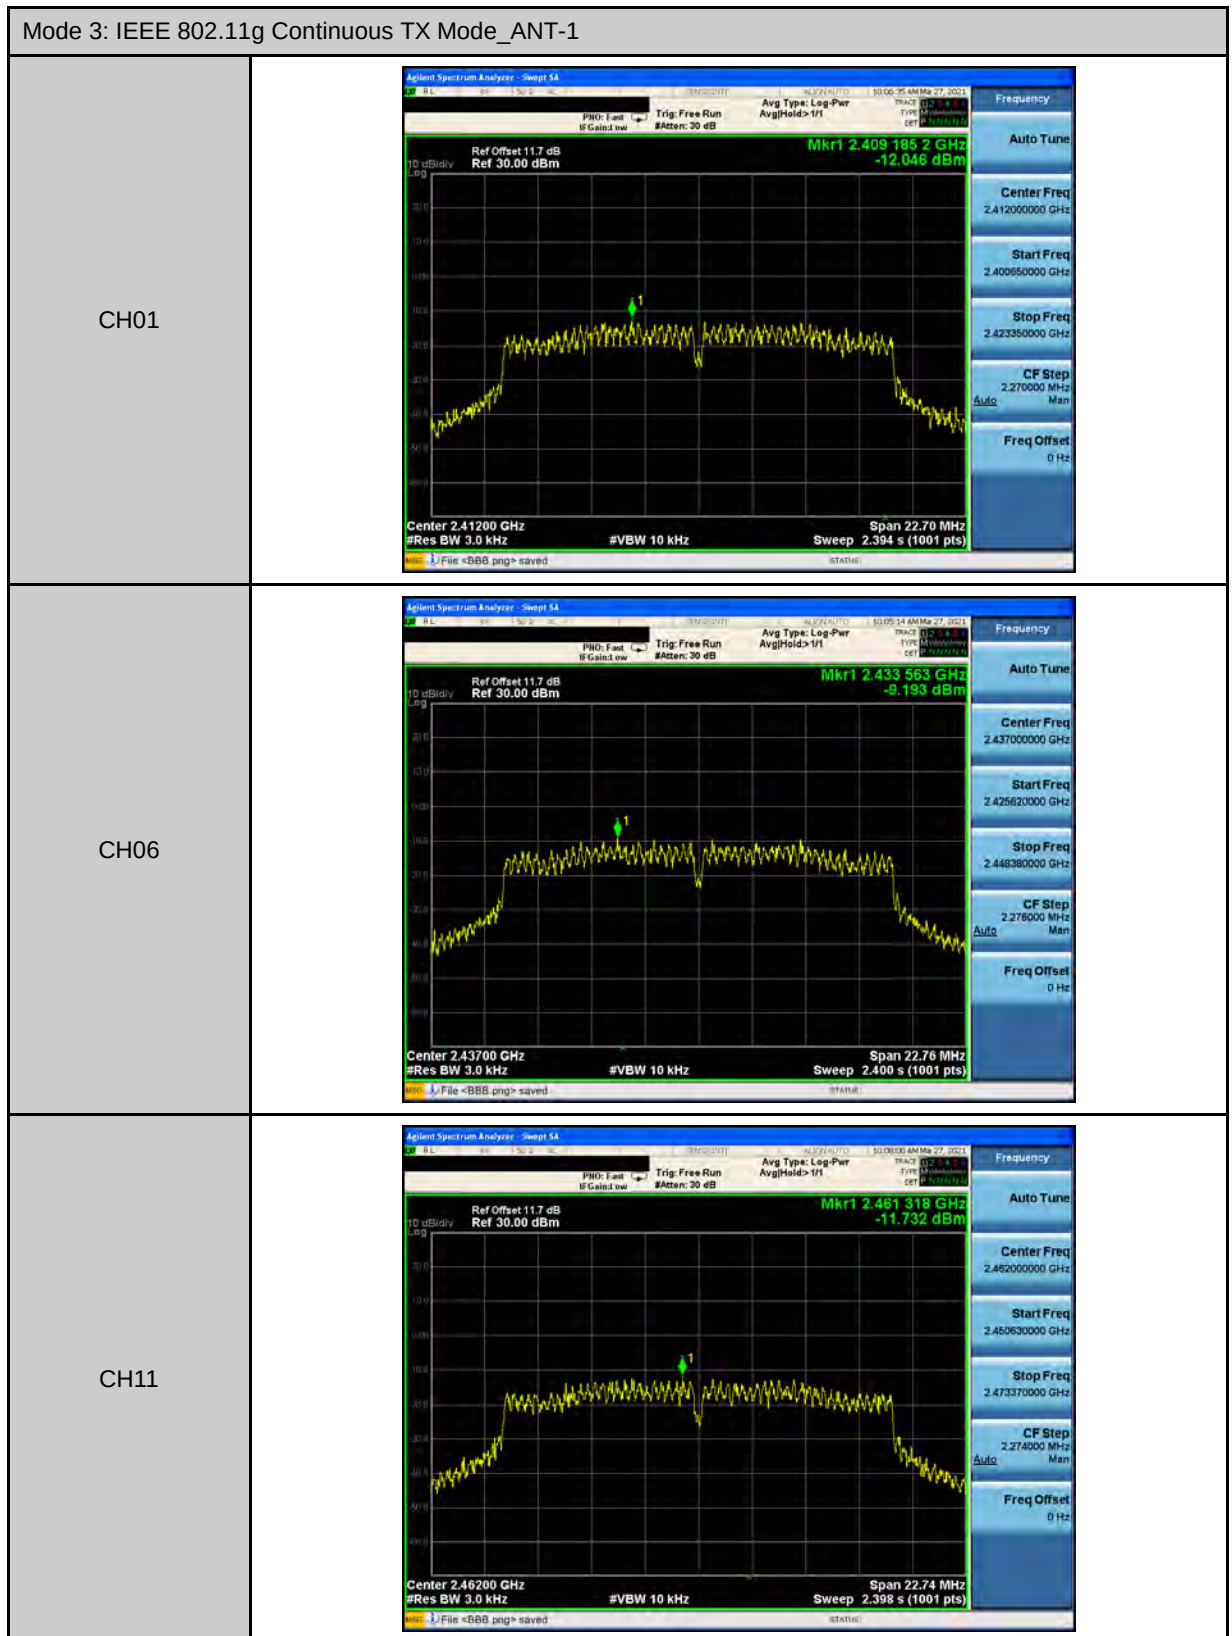

Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX Mode_ANT-1

CH01

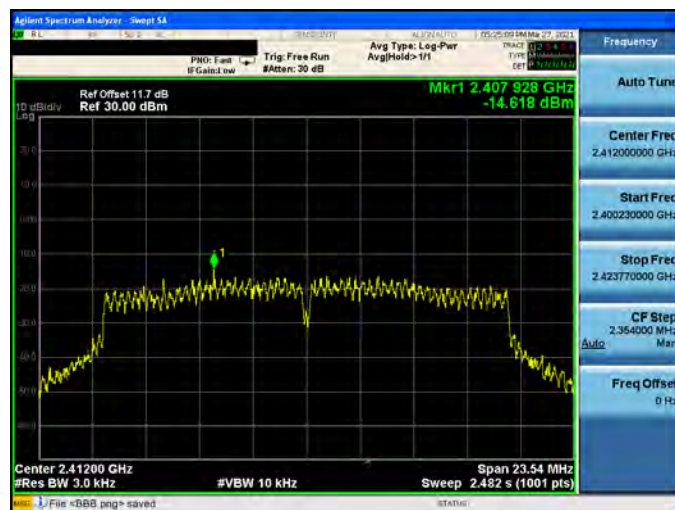


CH06



CH11




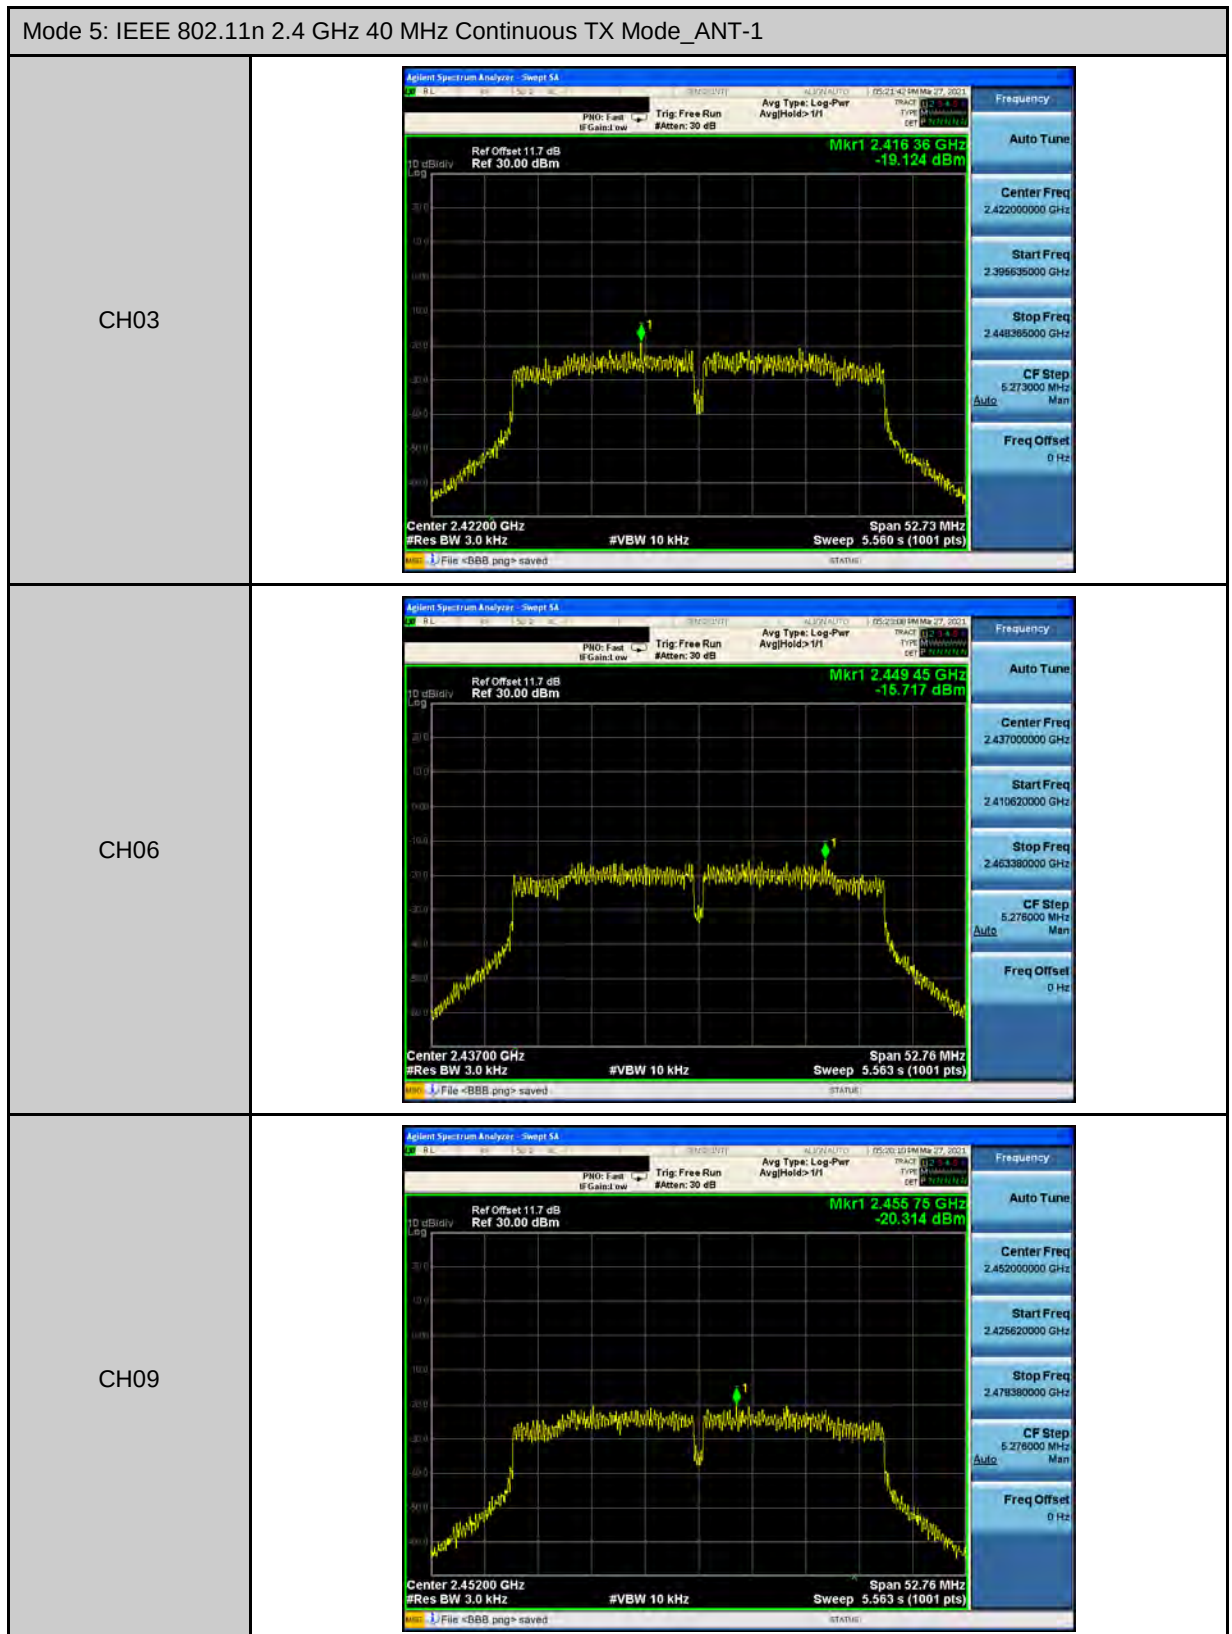

Annex D. Radiated Emission Measurement (5 GHz)

其它不必要之訊號 (1 GHz 以下)

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5500 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

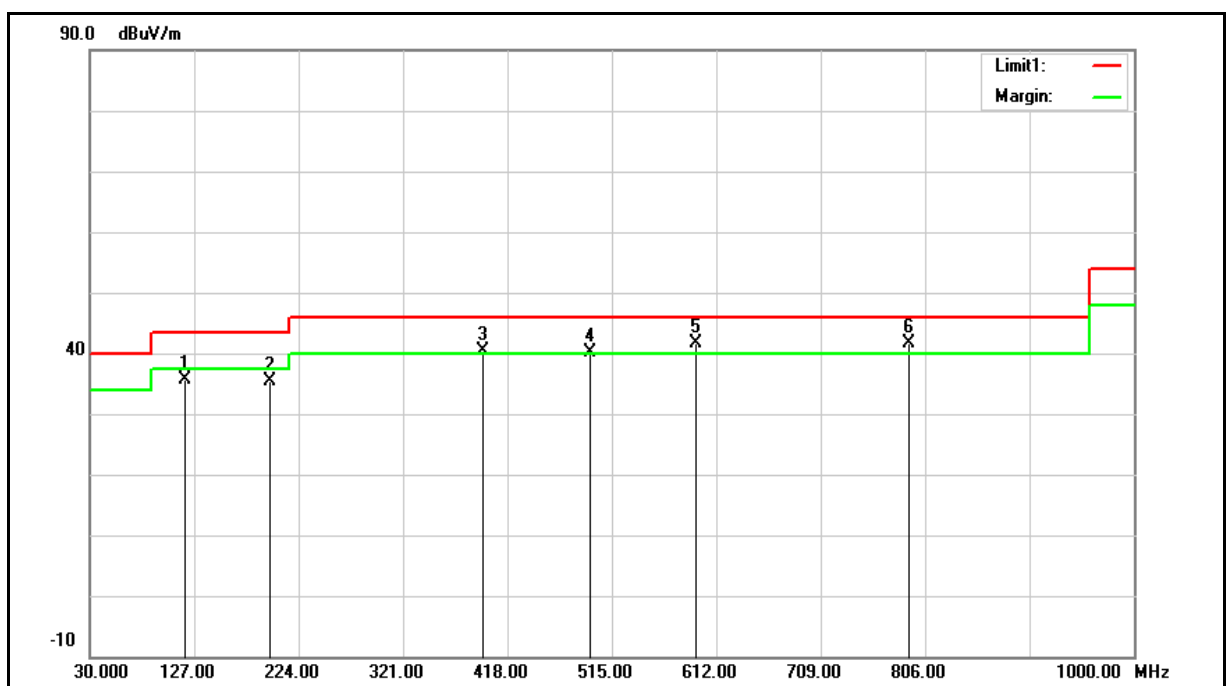

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	118.2700	45.76	-10.11	35.65	43.50	-7.85	QP
2	197.8100	45.30	-9.92	35.38	43.50	-8.12	QP
3	395.6900	45.37	-4.87	40.50	46.00	-5.50	QP
4	494.6300	43.70	-3.64	40.06	46.00	-5.94	QP
5	593.5700	43.02	-1.41	41.61	46.00	-4.39	QP
6	791.4500	40.14	1.48	41.62	46.00	-4.38	QP


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

Example: $35.65 = -10.11 + 45.76$

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5500 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

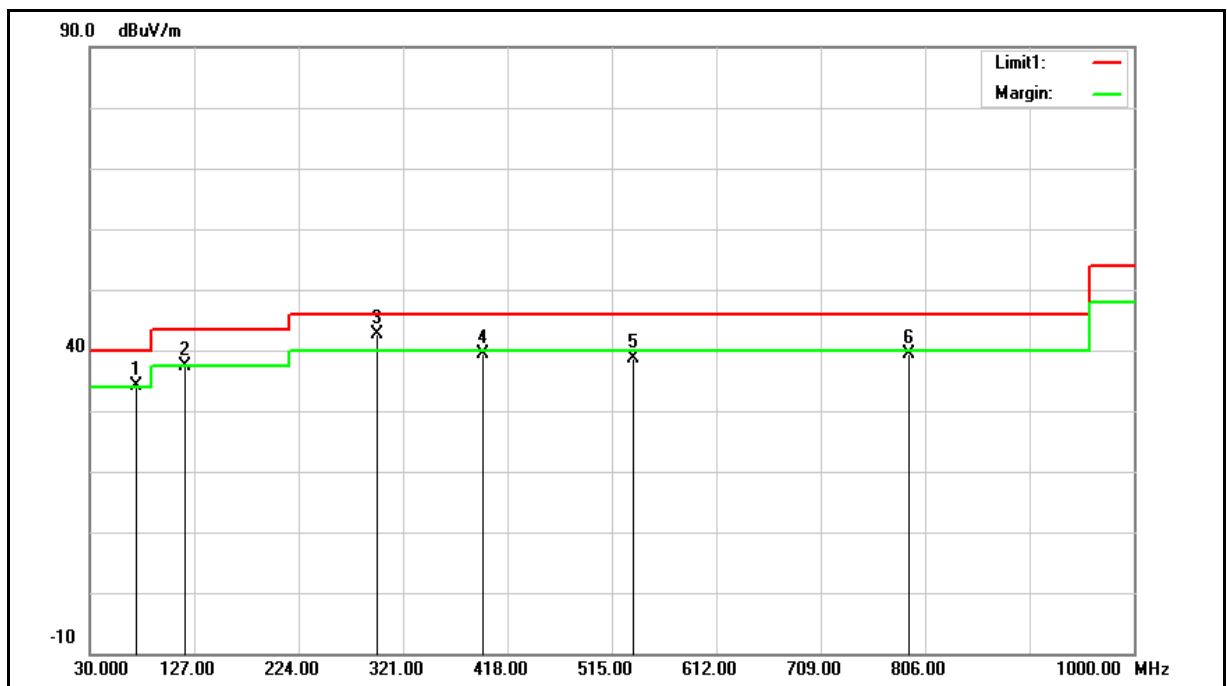

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	72.6800	45.31	-11.22	34.09	40.00	-5.91	QP
2	118.2700	47.39	-10.11	37.28	43.50	-6.22	QP
3	296.7500	49.29	-6.61	42.68	46.00	-3.32	QP
4	395.6900	44.31	-4.87	39.44	46.00	-6.56	QP
5	534.4000	41.46	-2.80	38.66	46.00	-7.34	QP
6	791.4500	38.01	1.48	39.49	46.00	-6.51	QP

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).


Example: $34.09 = -11.22 + 45.31$

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

場強輻射量測 (1 GHz 以上)

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

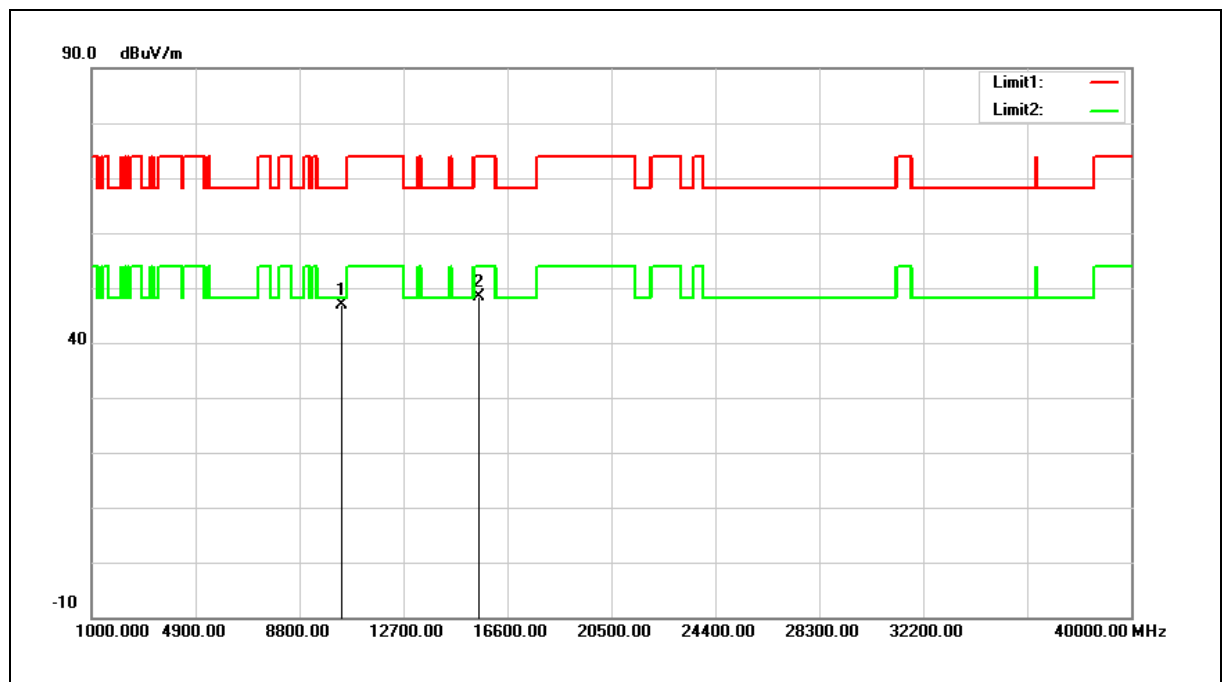

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	35.22	11.69	46.91	68.20	-21.29	peak
2	15540.000	33.83	14.52	48.35	74.00	-25.65	peak


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

Example: $46.91 = 11.69 + 35.22$

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

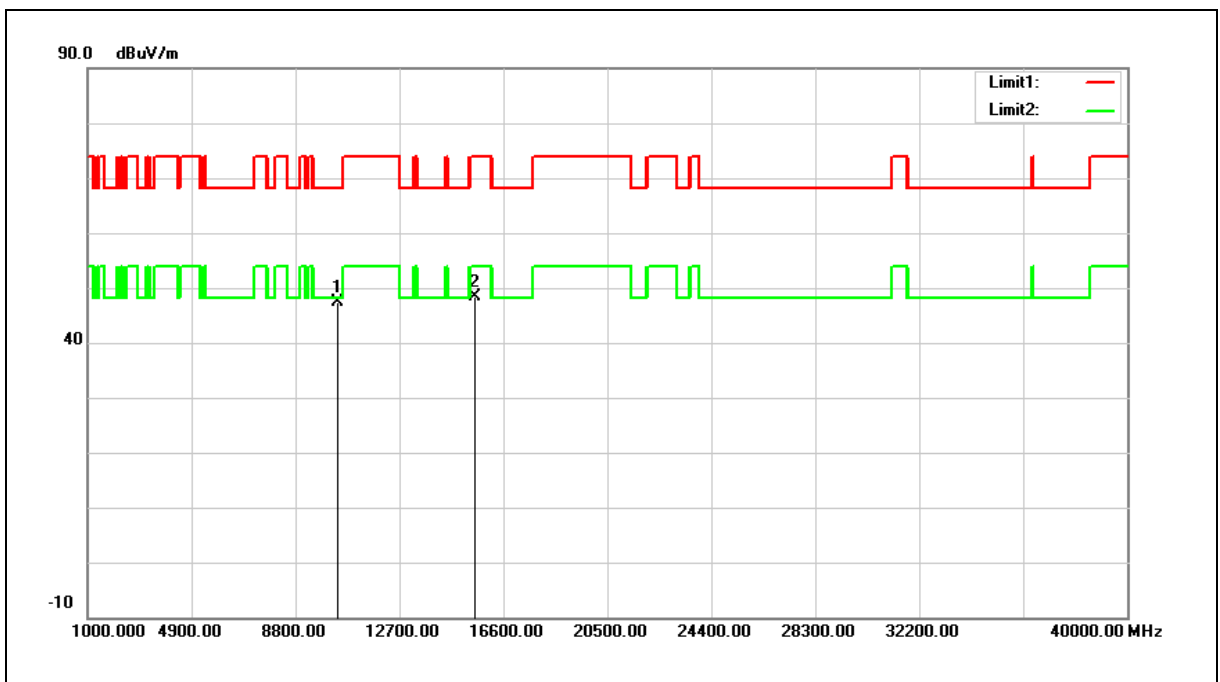

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	35.73	11.69	47.42	68.20	-20.78	peak
2	15540.000	33.74	14.52	48.26	74.00	-25.74	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: $47.42 = 11.69 + 35.73$

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

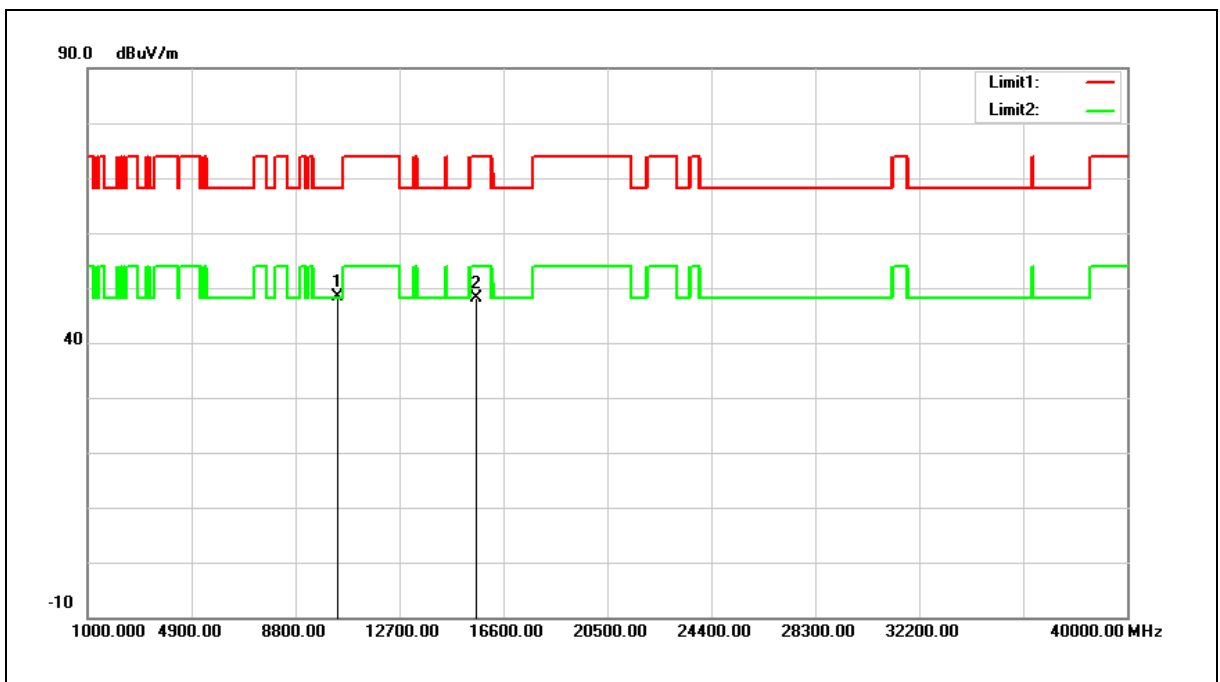


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	36.62	11.79	48.41	68.20	-19.79	peak
2	15600.000	33.70	14.39	48.09	74.00	-25.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

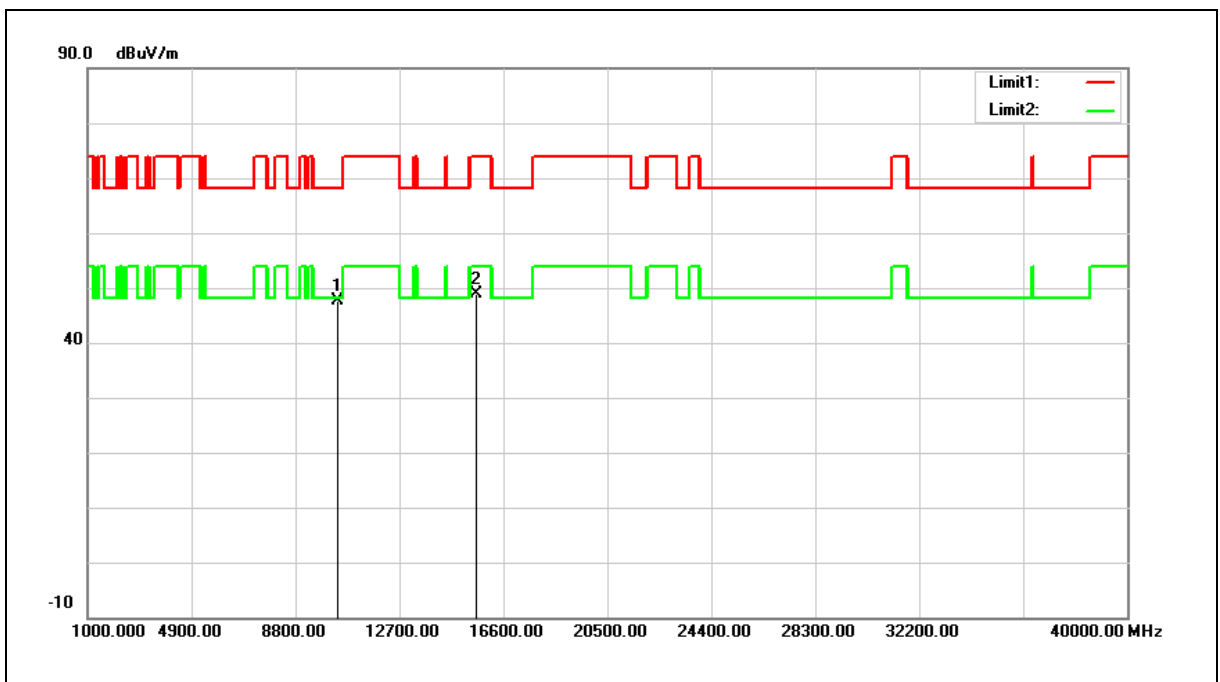


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	35.75	11.79	47.54	68.20	-20.66	peak
2	15600.000	34.37	14.39	48.76	74.00	-25.24	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

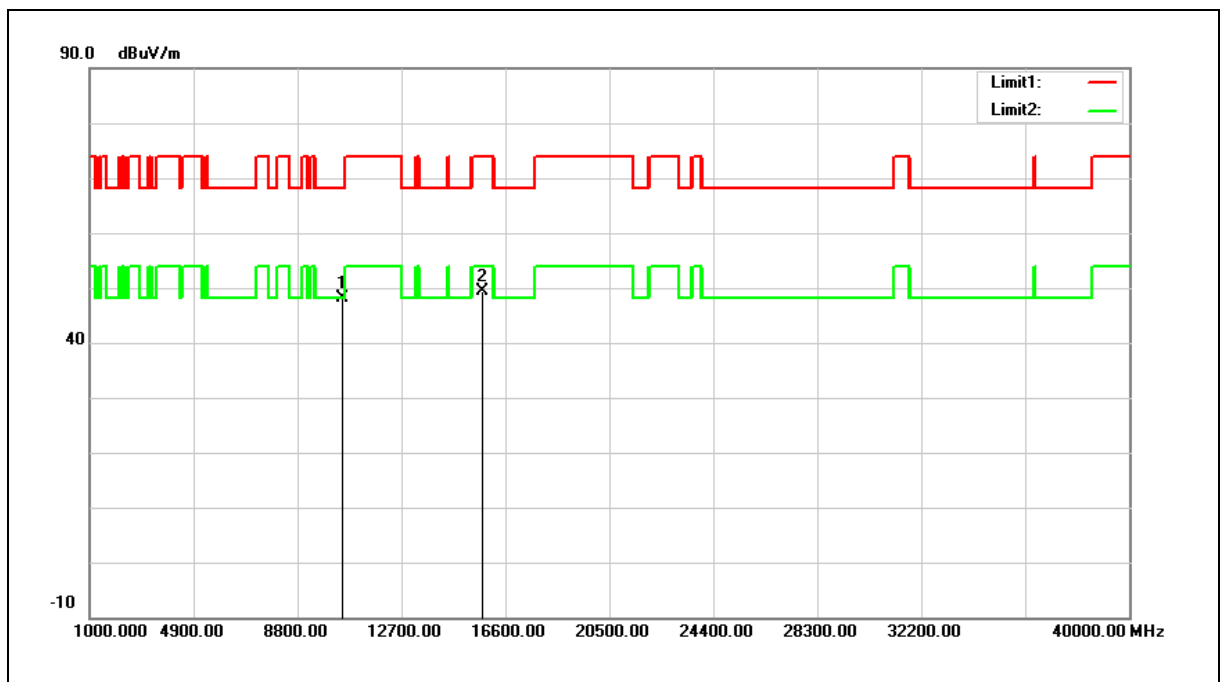


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	36.05	12.00	48.05	68.20	-20.15	peak
2	15720.000	35.16	14.13	49.29	74.00	-24.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

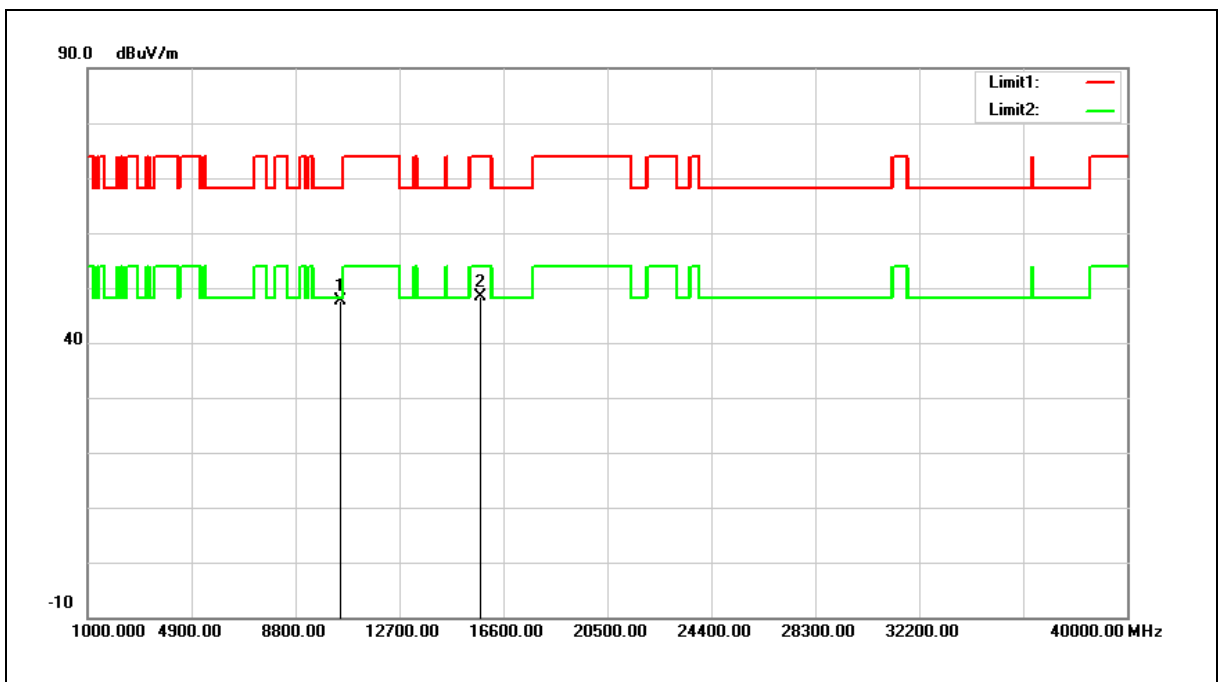


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	35.75	12.00	47.75	68.20	-20.45	peak
2	15720.000	34.32	14.13	48.45	74.00	-25.55	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

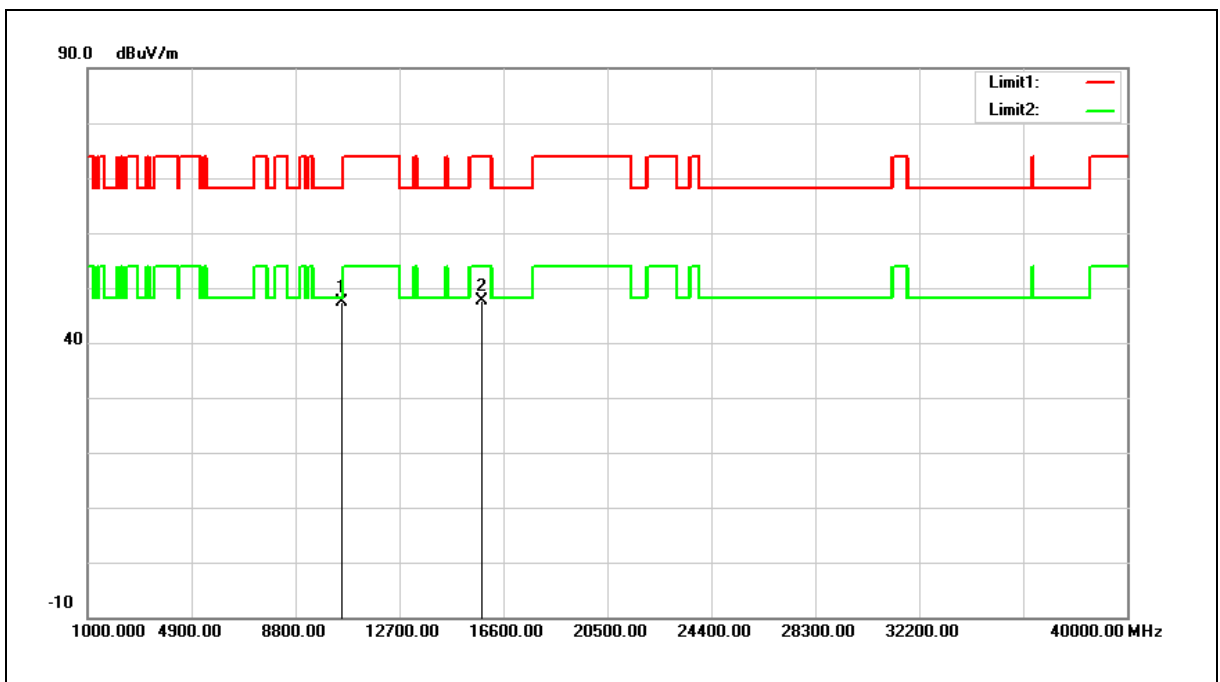


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	35.43	12.06	47.49	68.20	-20.71	peak
2	15780.000	33.60	14.02	47.62	74.00	-26.38	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

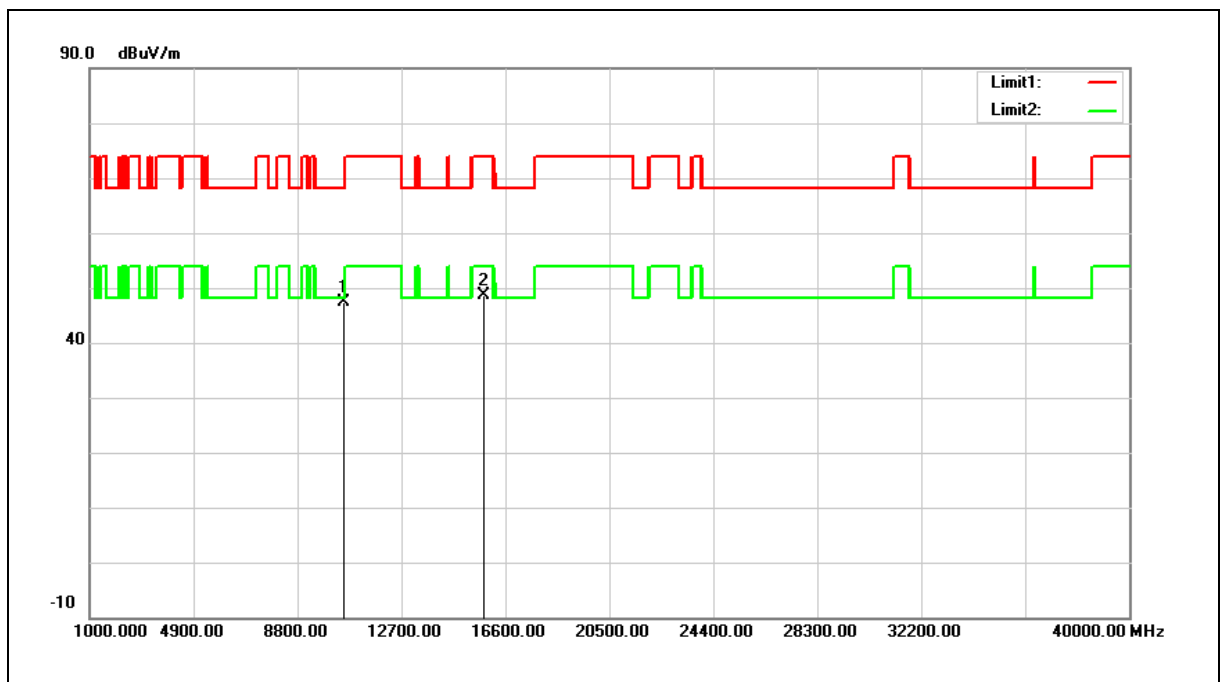


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	35.21	12.06	47.27	68.20	-20.93	peak
2	15780.000	34.59	14.02	48.61	74.00	-25.39	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

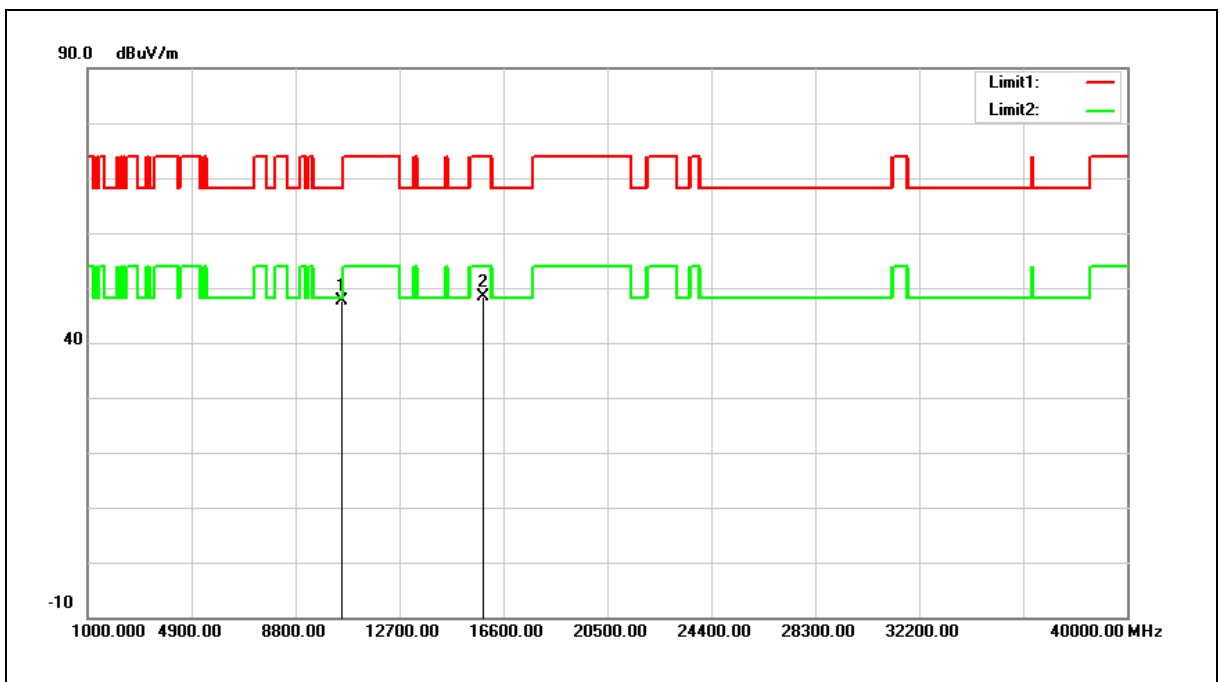


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	35.48	12.09	47.57	68.20	-20.63	peak
2	15840.000	34.62	13.88	48.50	74.00	-25.50	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

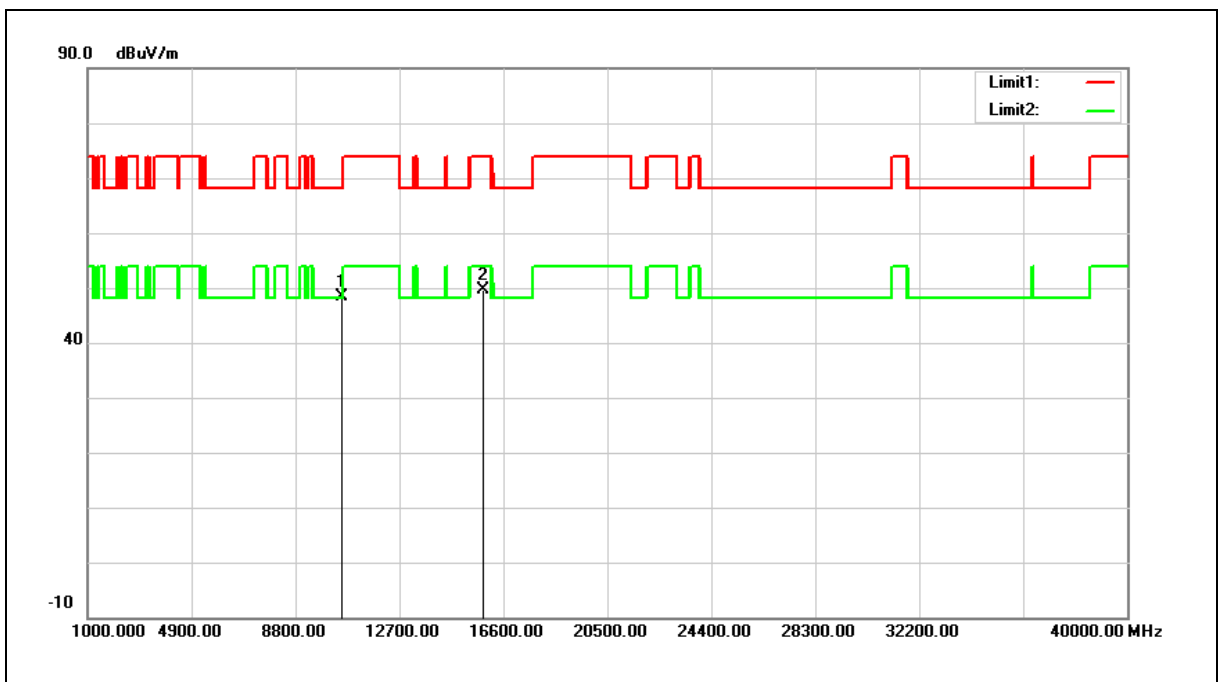


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	36.19	12.09	48.28	68.20	-19.92	peak
2	15840.000	35.81	13.88	49.69	74.00	-24.31	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

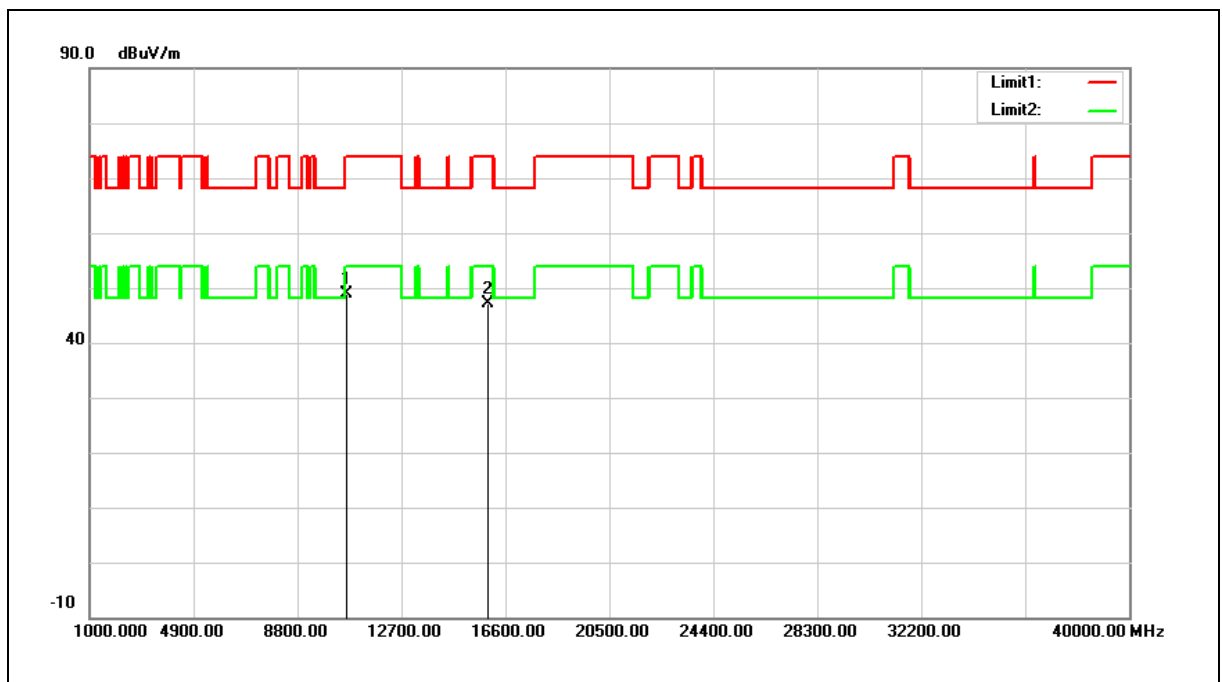


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	36.85	12.14	48.99	74.00	-25.01	peak
2	15960.000	33.48	13.63	47.11	74.00	-26.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

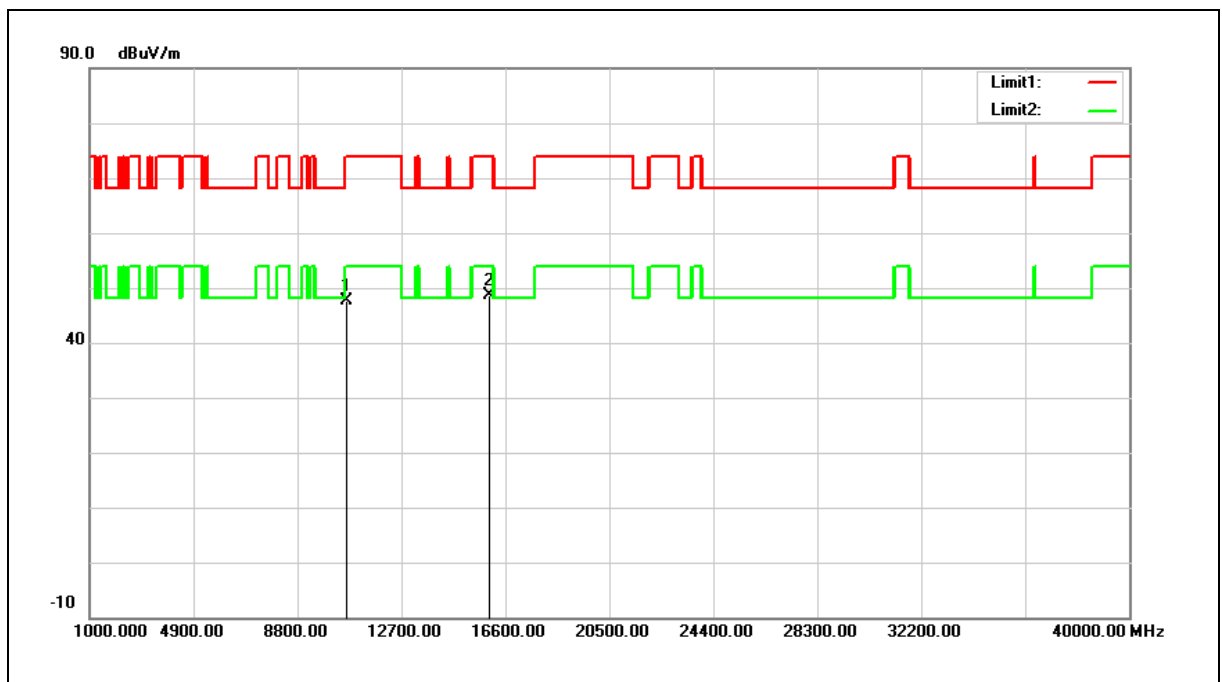


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	35.50	12.14	47.64	74.00	-26.36	peak
2	15960.000	35.05	13.63	48.68	74.00	-25.32	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

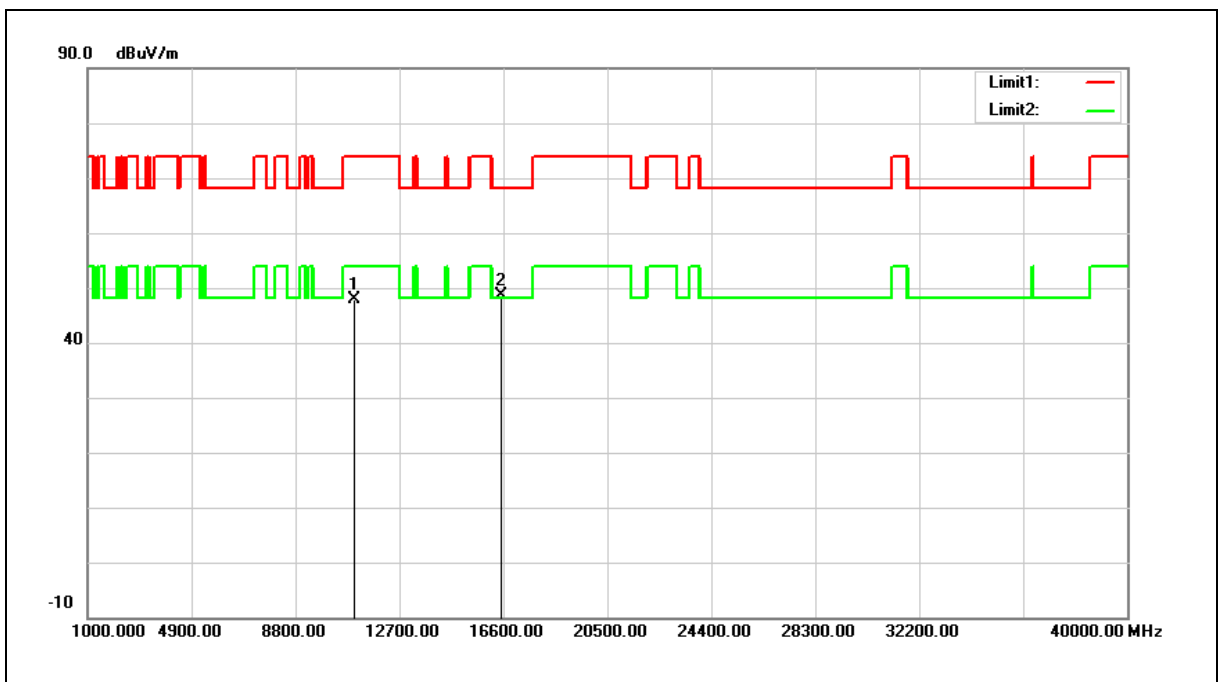


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	35.61	12.39	48.00	74.00	-26.00	peak
2	16500.000	34.37	14.24	48.61	68.20	-19.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

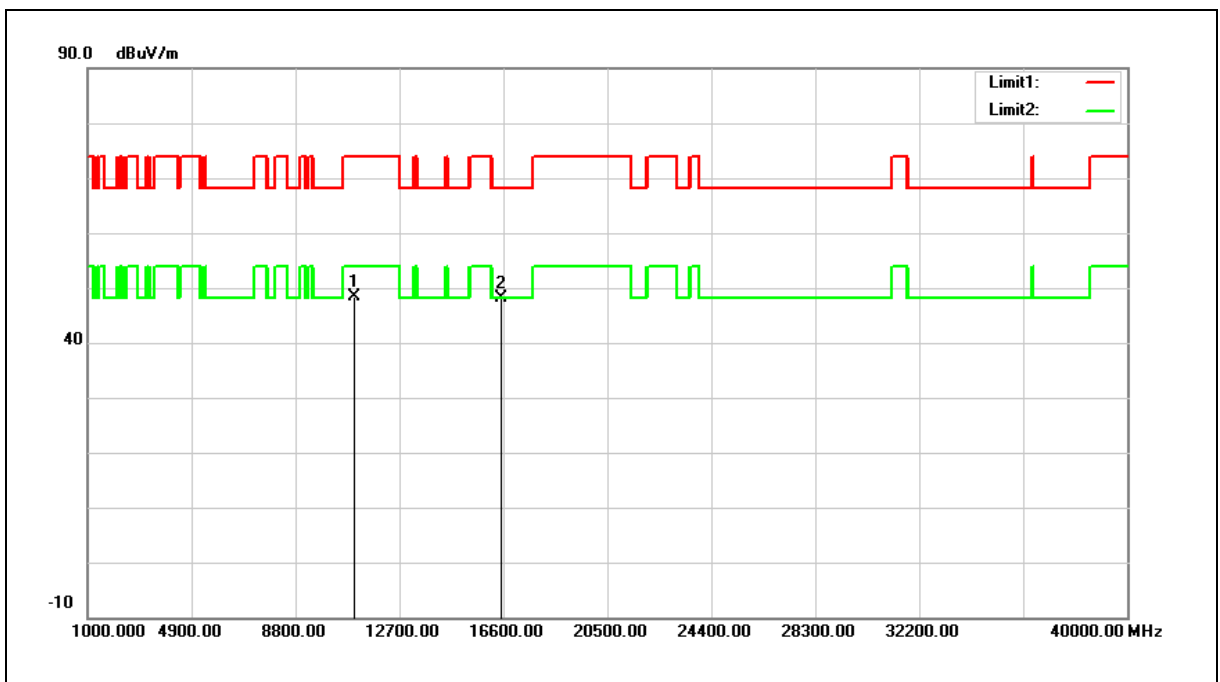


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	35.98	12.39	48.37	74.00	-25.63	peak
2	16500.000	33.88	14.24	48.12	68.20	-20.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

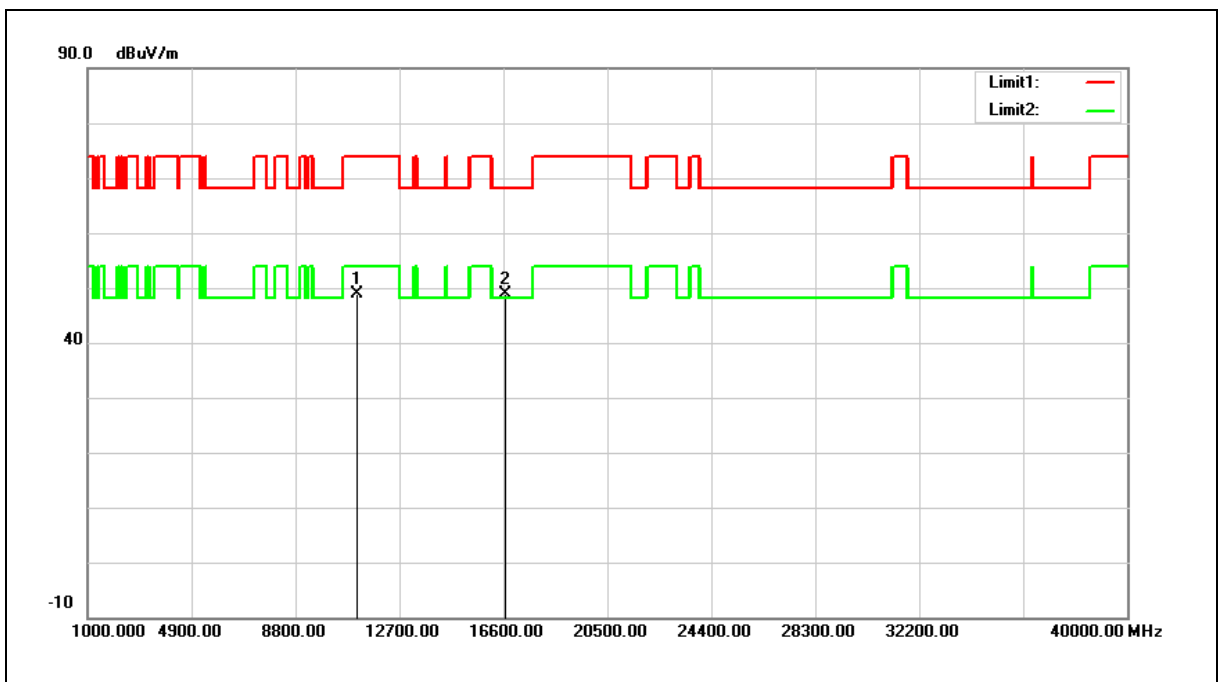


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	36.34	12.46	48.80	74.00	-25.20	peak
2	16680.000	33.62	15.22	48.84	68.20	-19.36	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

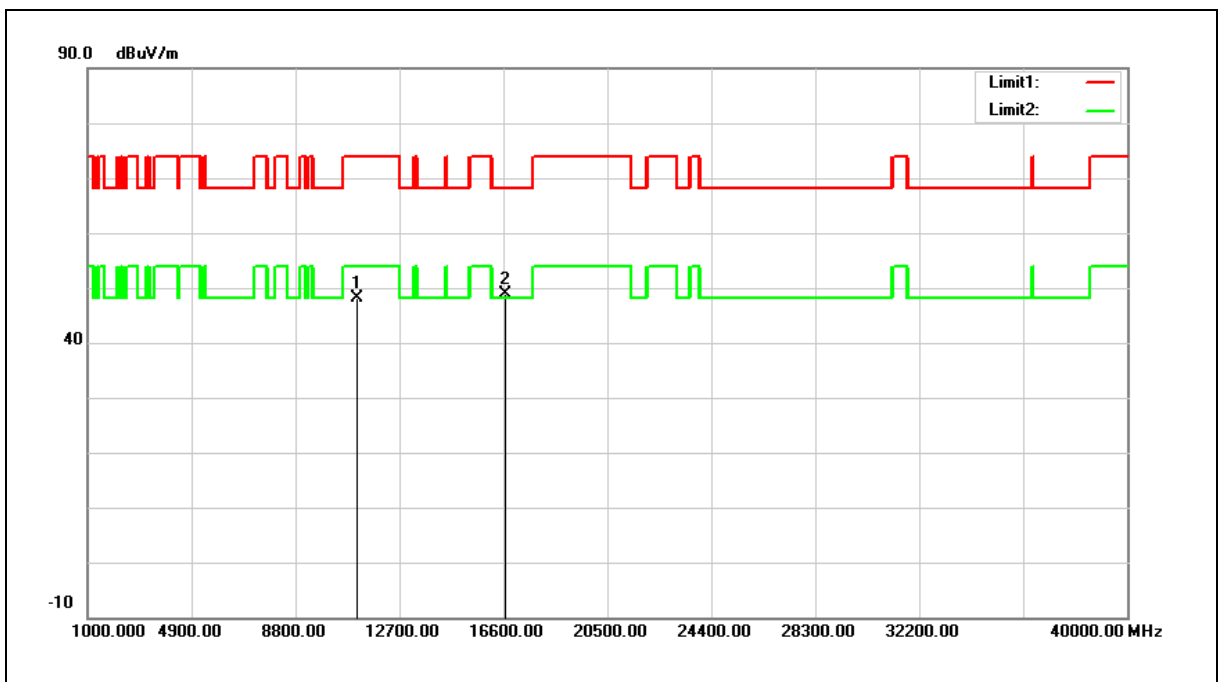


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	35.55	12.46	48.01	74.00	-25.99	peak
2	16680.000	33.54	15.22	48.76	68.20	-19.44	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

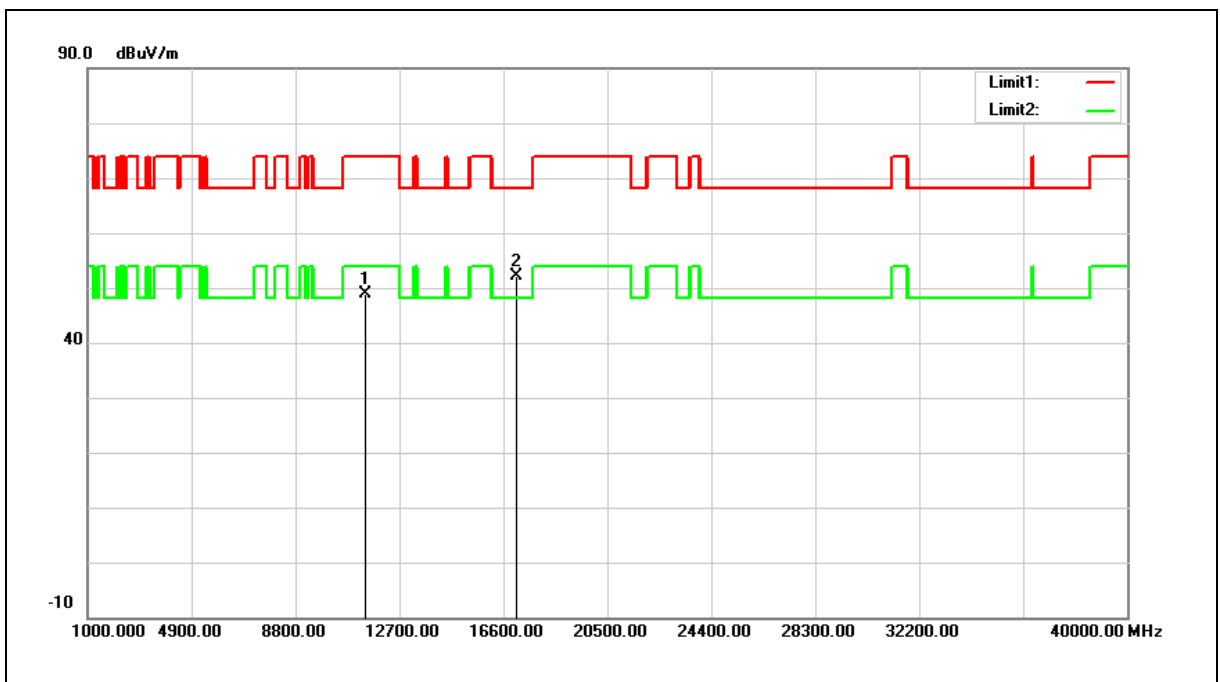


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	36.15	12.63	48.78	74.00	-25.22	peak
2	17100.000	34.58	17.63	52.21	68.20	-15.99	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

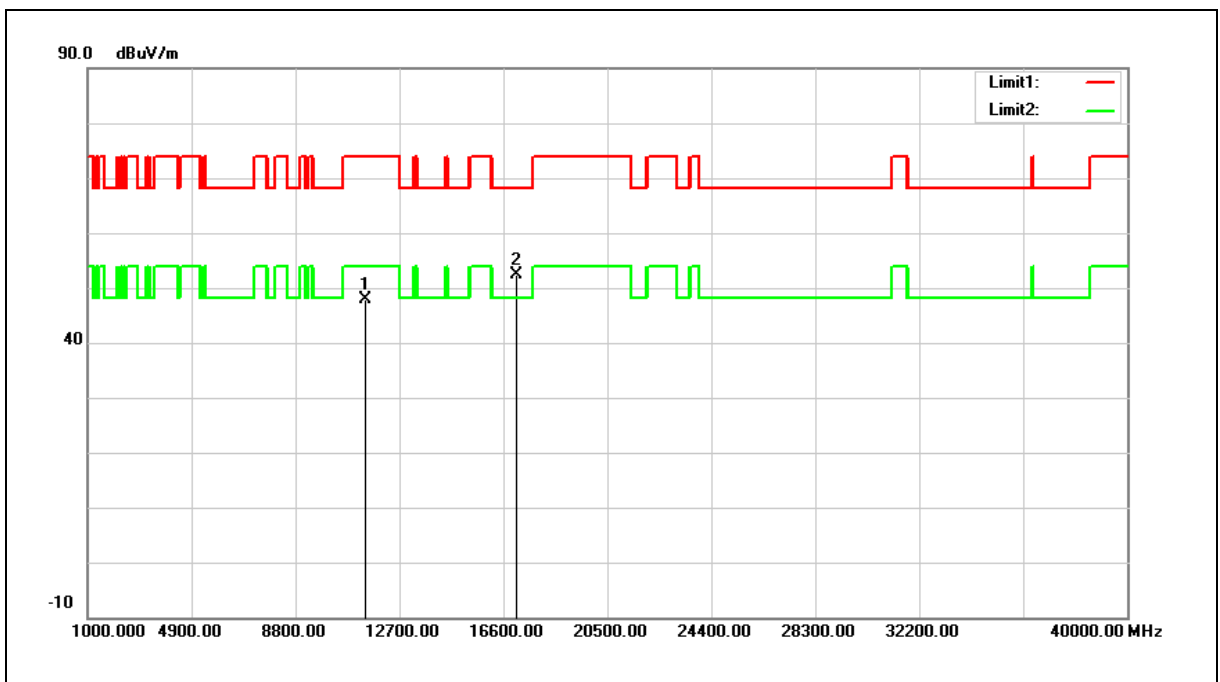


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	35.29	12.63	47.92	74.00	-26.08	peak
2	17100.000	34.79	17.63	52.42	68.20	-15.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

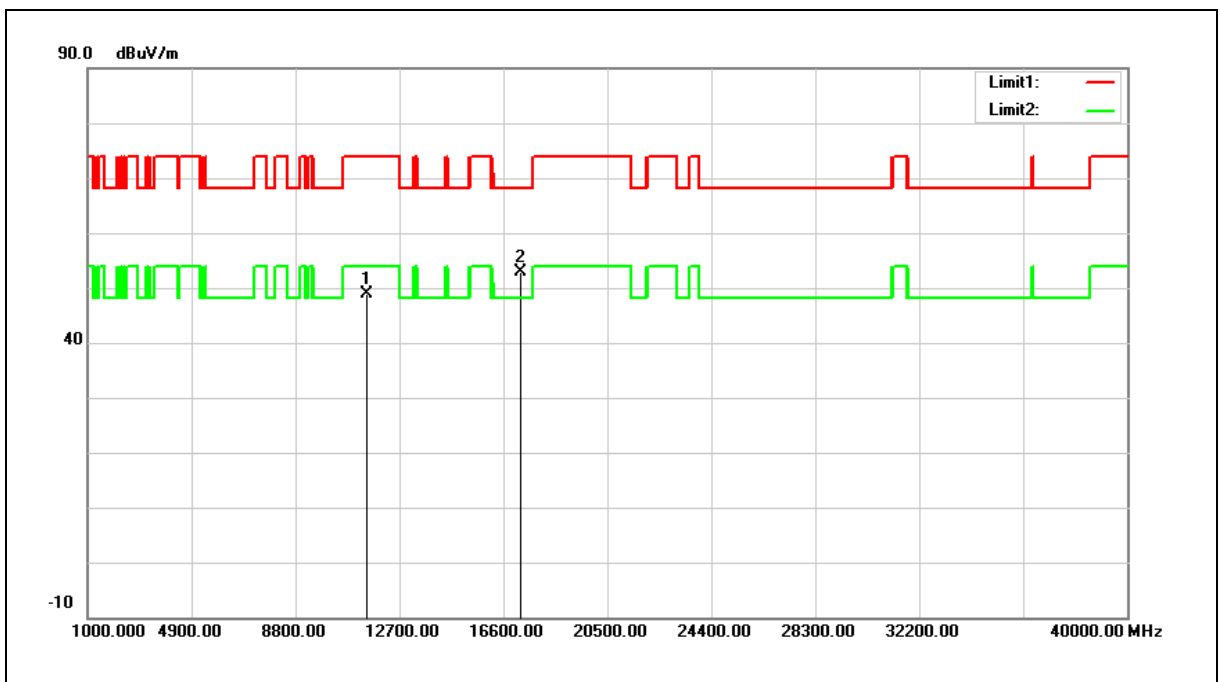


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	36.21	12.68	48.89	74.00	-25.11	peak
2	17235.000	34.35	18.52	52.87	68.20	-15.33	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

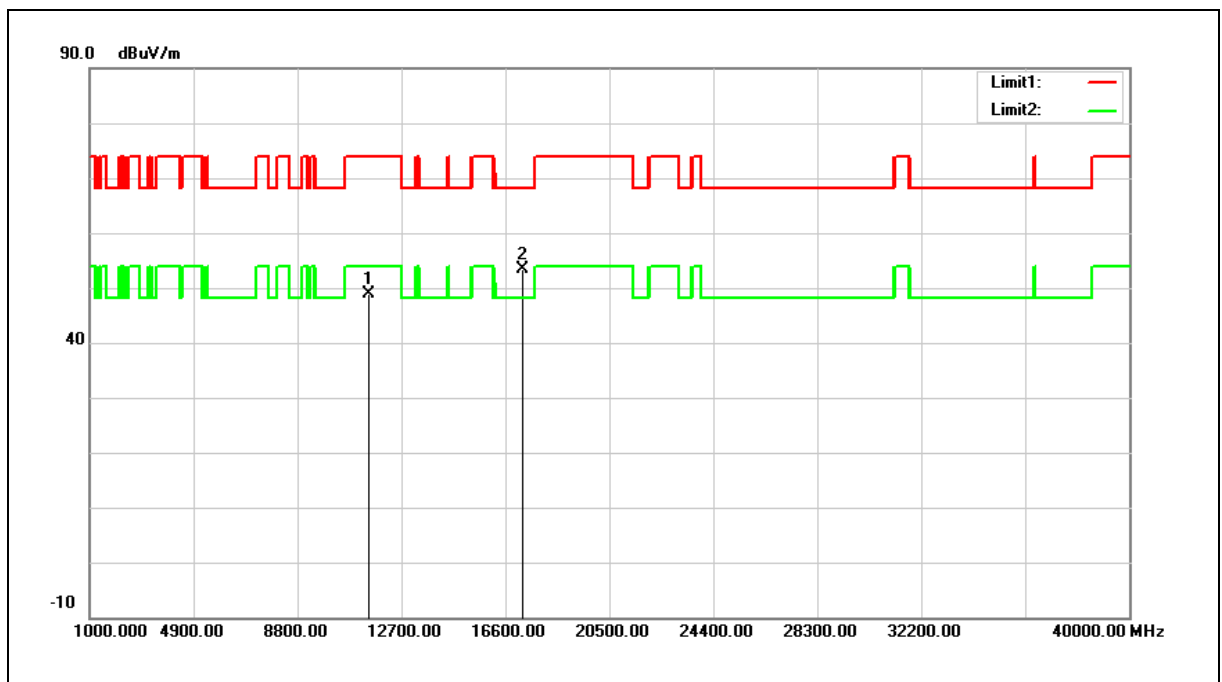


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	36.18	12.68	48.86	74.00	-25.14	peak
2	17235.000	34.89	18.52	53.41	68.20	-14.79	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

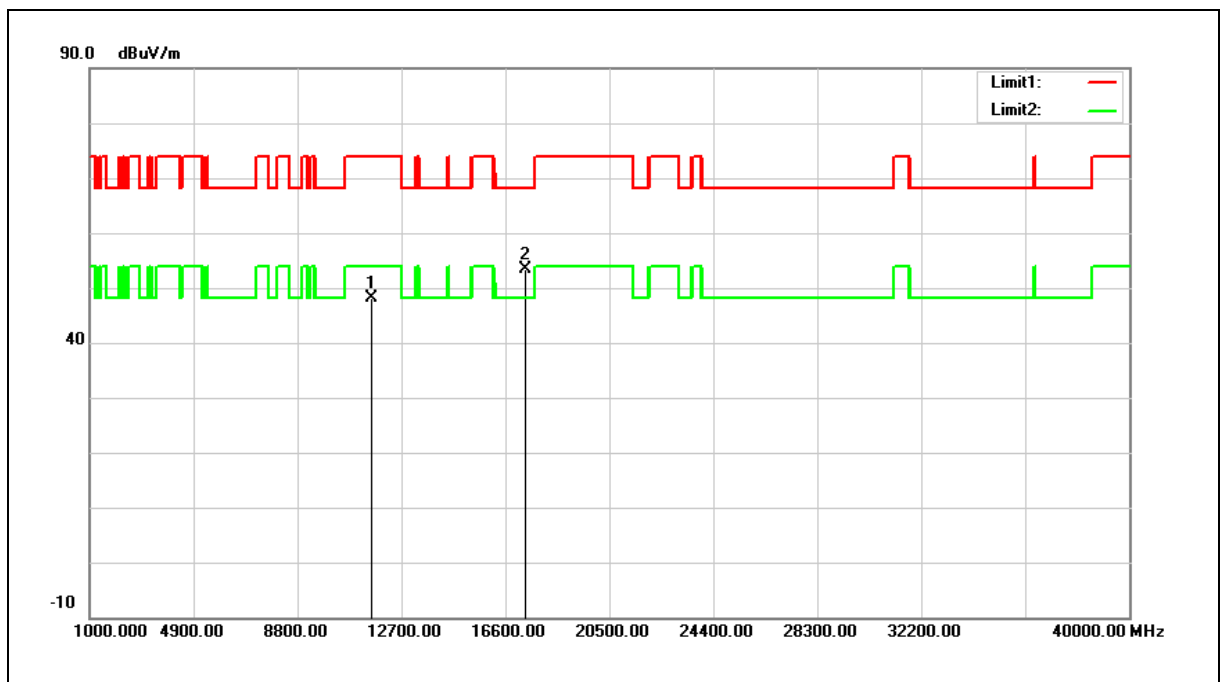


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.50	12.59	48.09	74.00	-25.91	peak
2	17355.000	34.18	19.32	53.50	68.20	-14.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

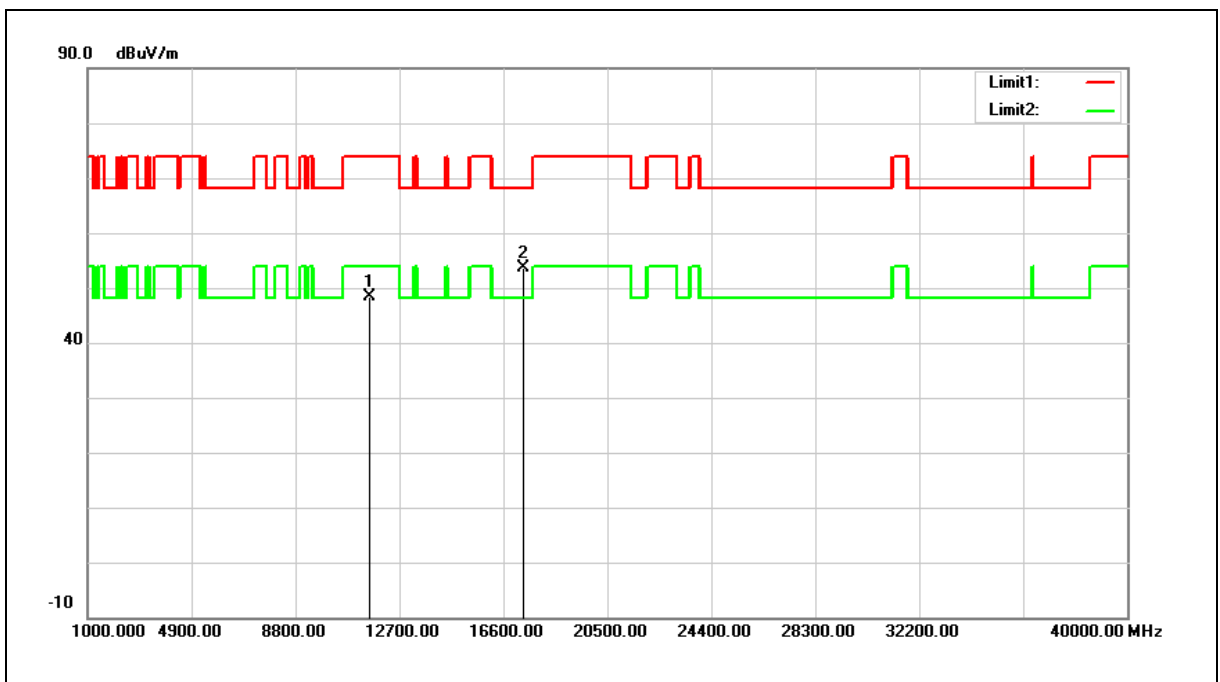


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.80	12.59	48.39	74.00	-25.61	peak
2	17355.000	34.36	19.32	53.68	68.20	-14.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

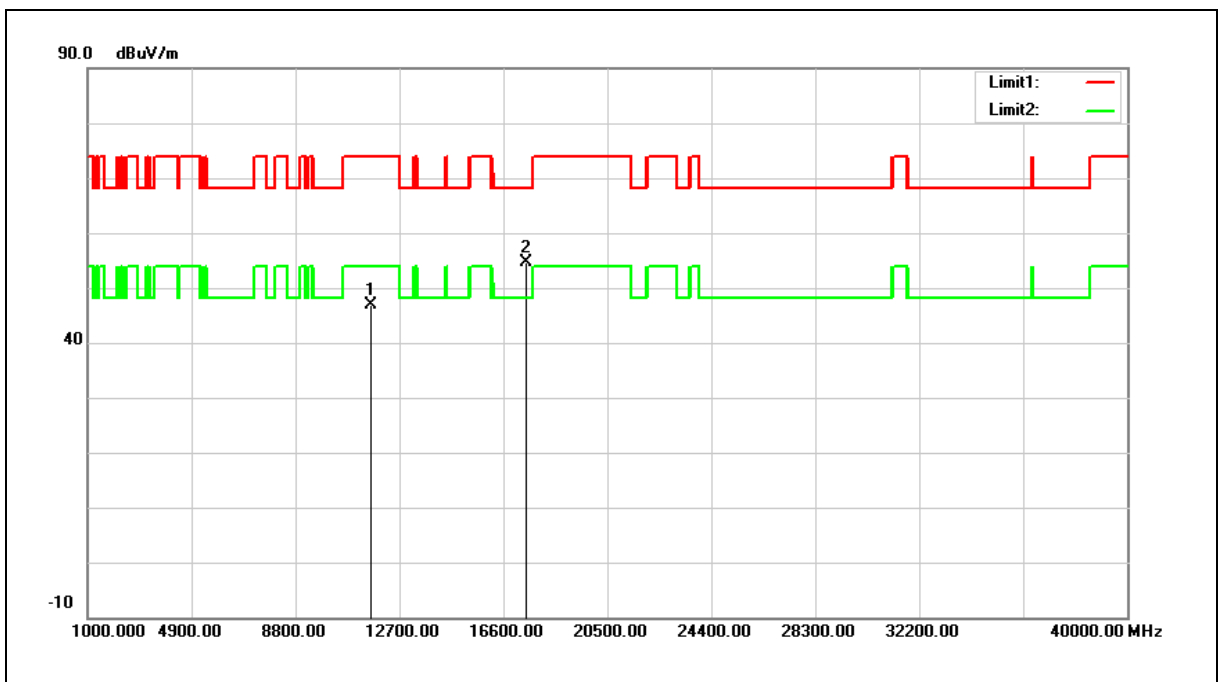


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.46	12.48	46.94	74.00	-27.06	peak
2	17475.000	34.52	20.13	54.65	68.20	-13.55	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

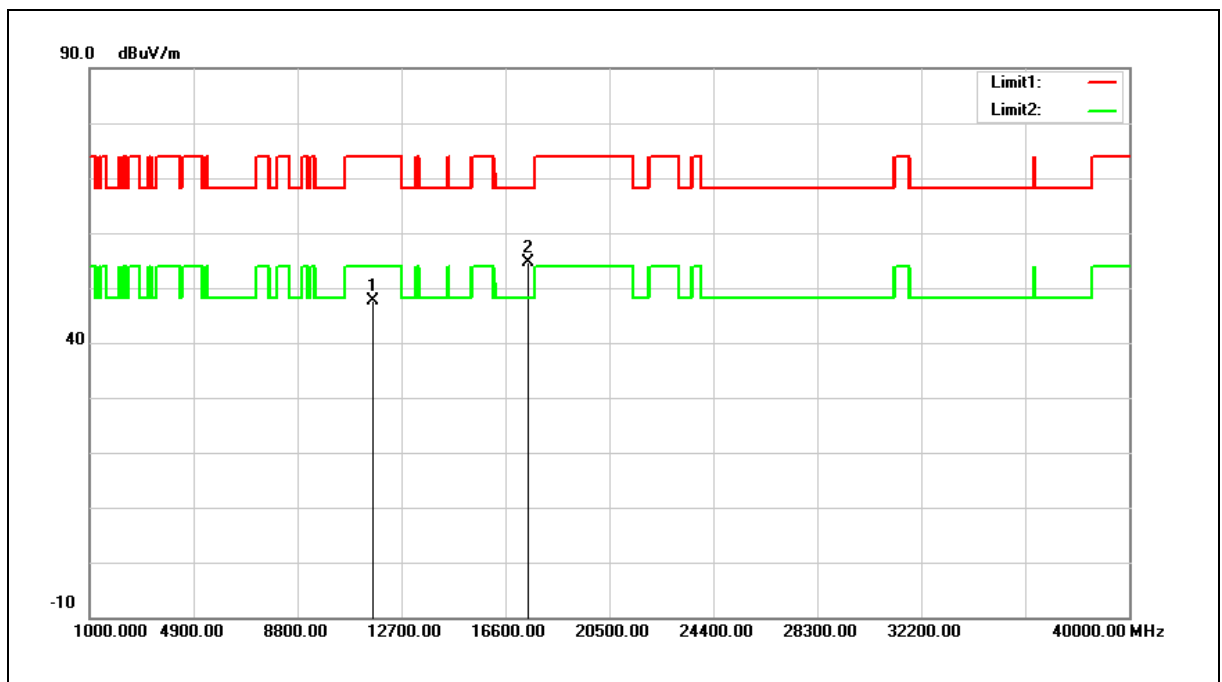


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.07	12.48	47.55	74.00	-26.45	peak
2	17475.000	34.45	20.13	54.58	68.20	-13.62	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

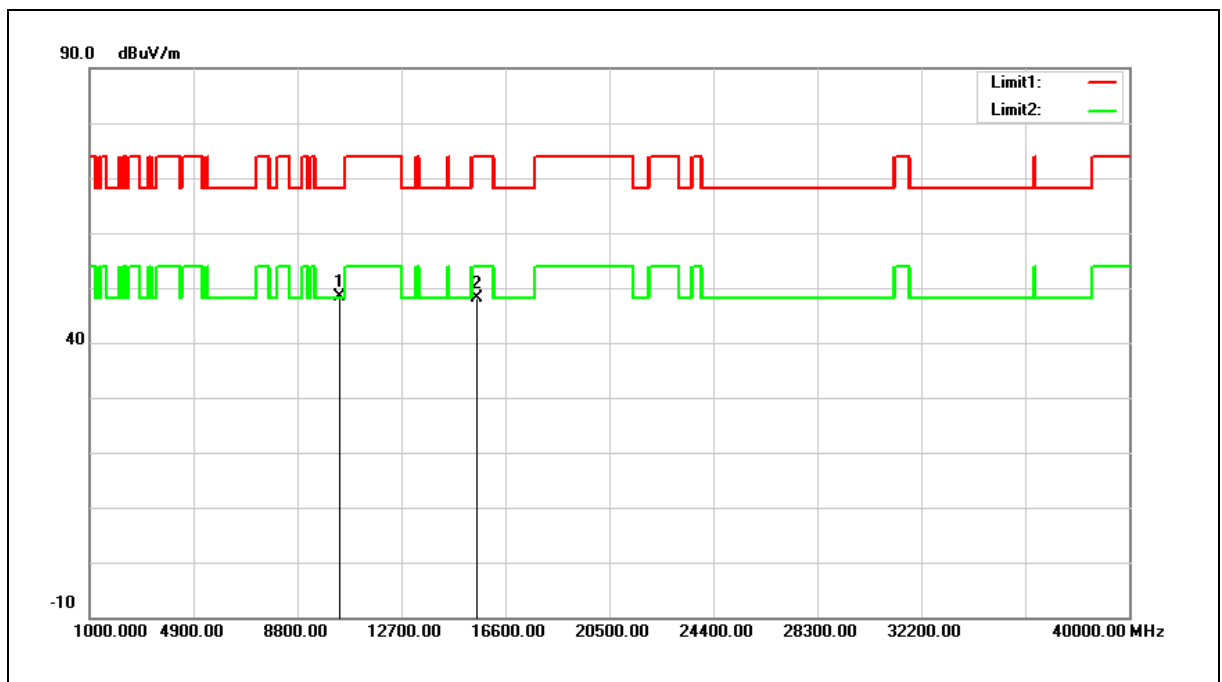


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	36.80	11.69	48.49	68.20	-19.71	peak
2	15540.000	33.56	14.52	48.08	74.00	-25.92	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

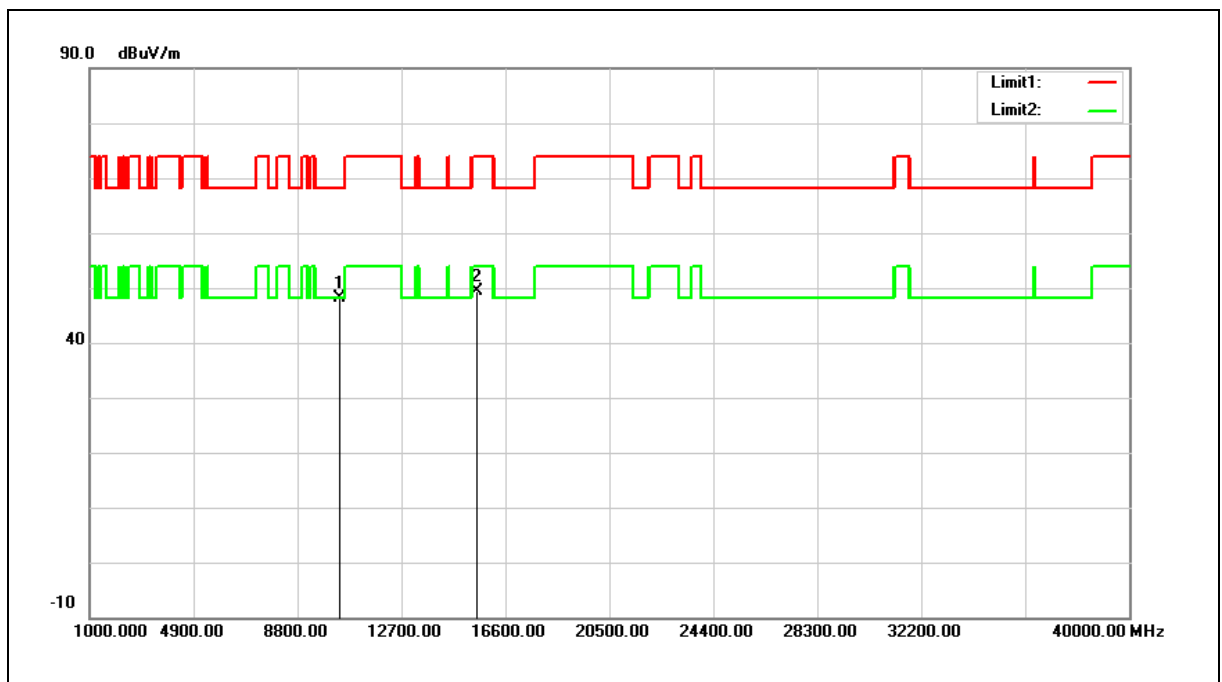


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	36.56	11.69	48.25	68.20	-19.95	peak
2	15540.000	34.79	14.52	49.31	74.00	-24.69	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

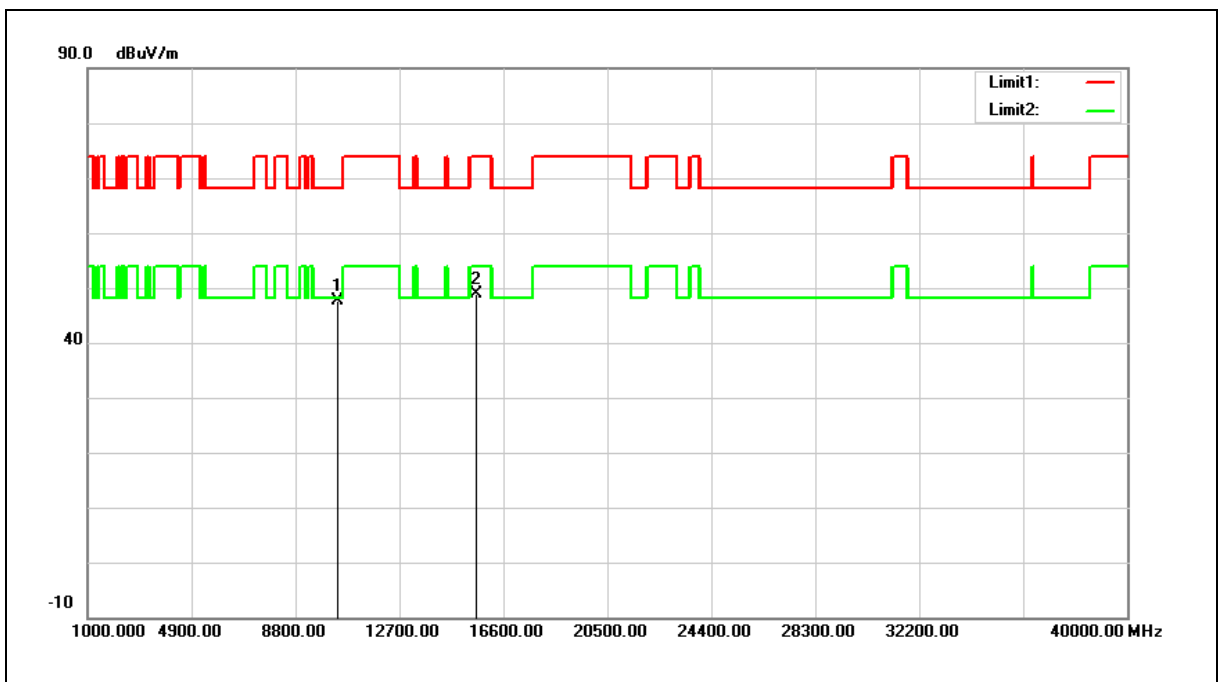


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	35.89	11.79	47.68	68.20	-20.52	peak
2	15600.000	34.48	14.39	48.87	74.00	-25.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

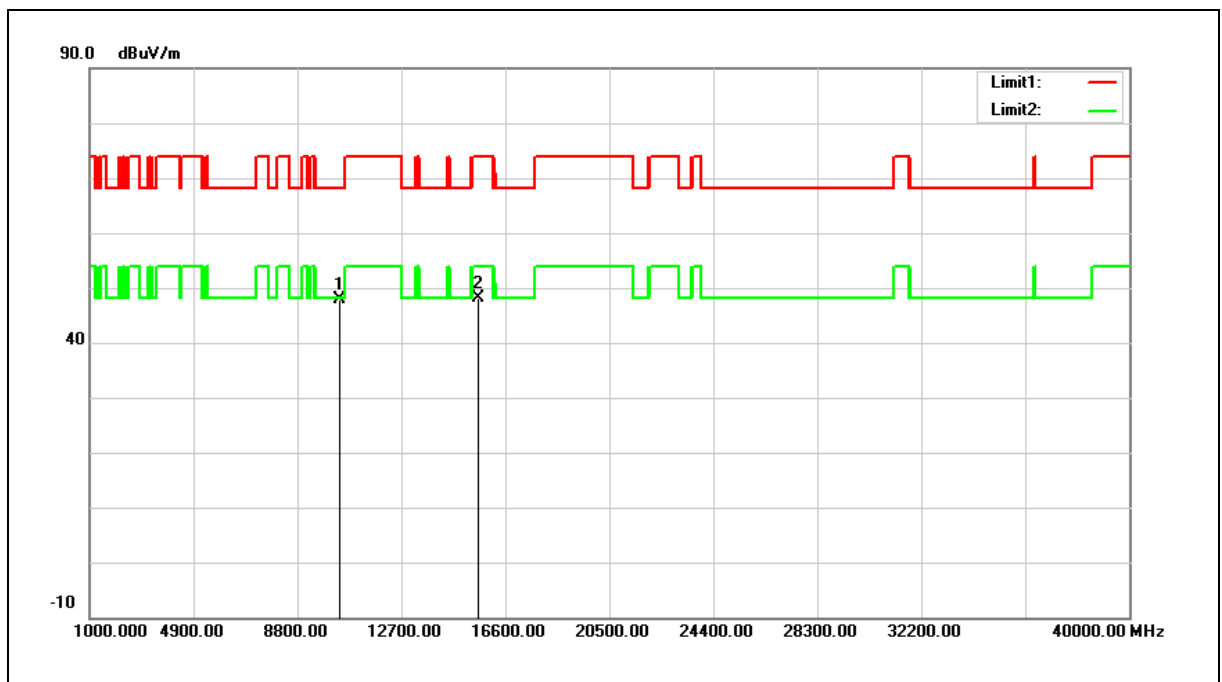


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	36.21	11.79	48.00	68.20	-20.20	peak
2	15600.000	33.80	14.39	48.19	74.00	-25.81	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

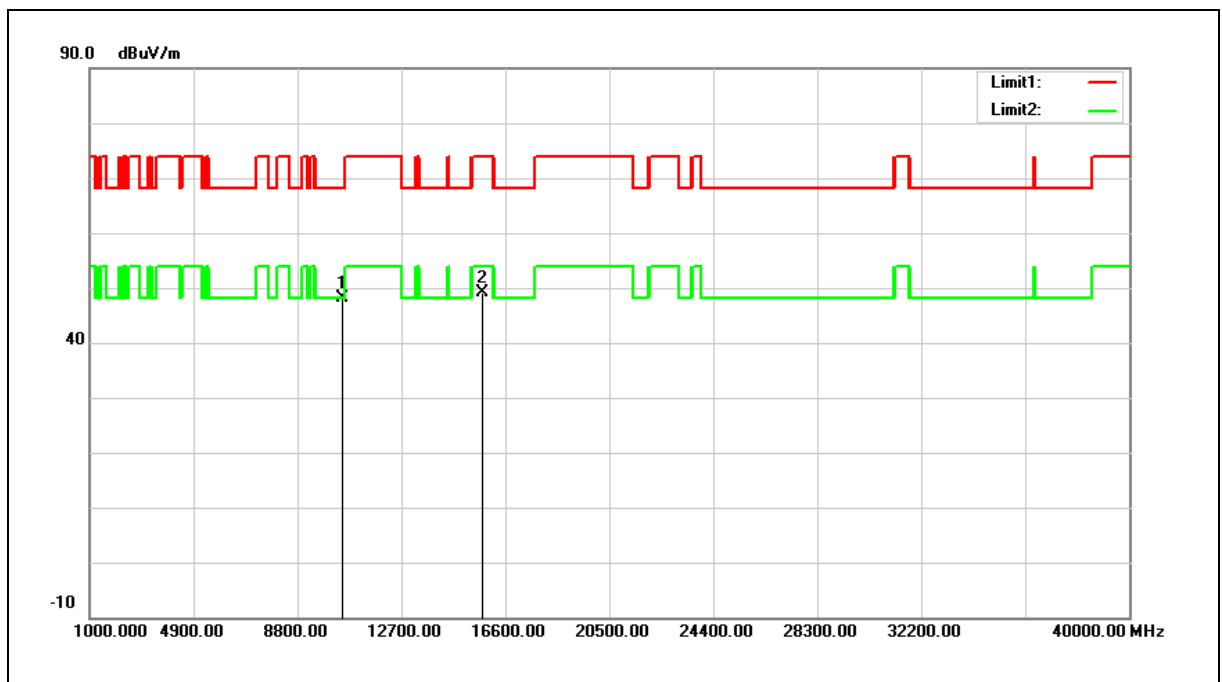


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	36.14	12.00	48.14	68.20	-20.06	peak
2	15720.000	35.11	14.13	49.24	74.00	-24.76	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

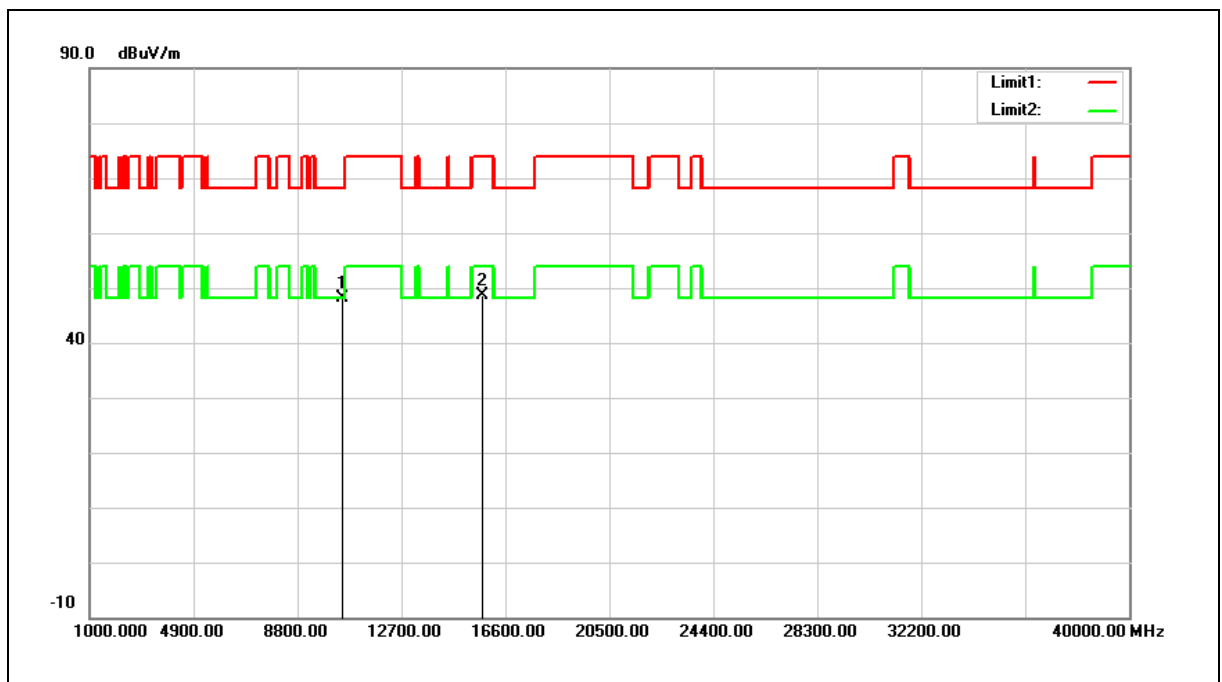


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	36.20	12.00	48.20	68.20	-20.00	peak
2	15720.000	34.56	14.13	48.69	74.00	-25.31	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

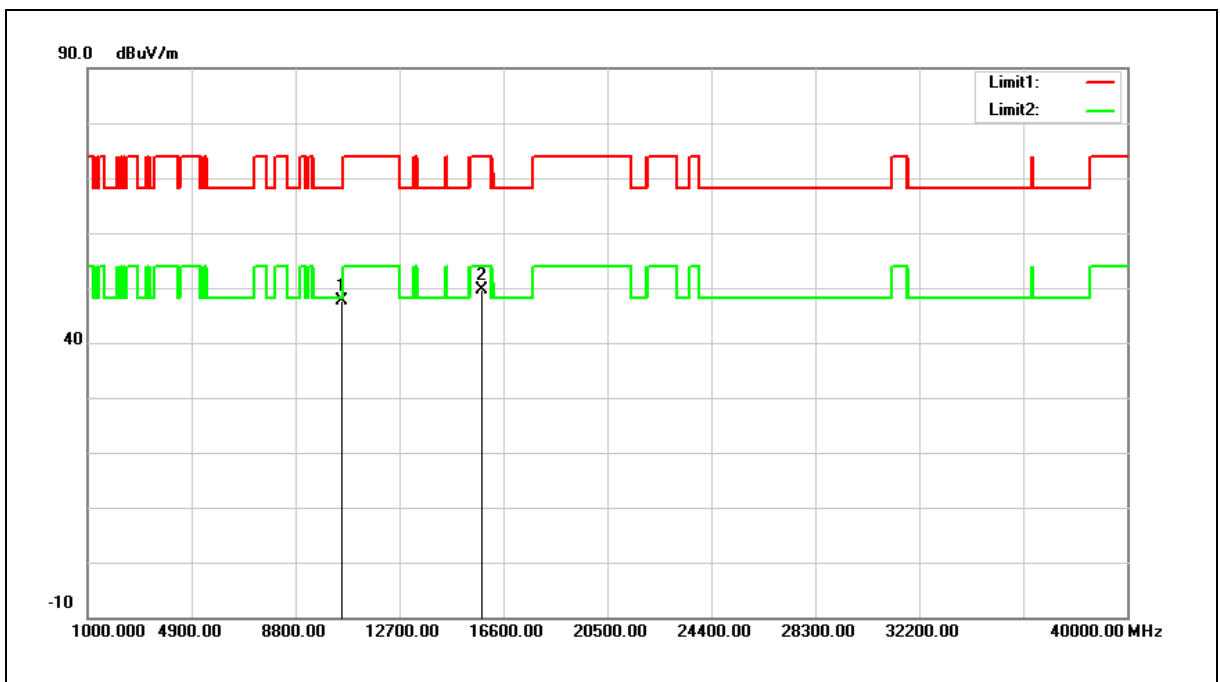


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	35.51	12.06	47.57	68.20	-20.63	peak
2	15780.000	35.64	14.02	49.66	74.00	-24.34	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

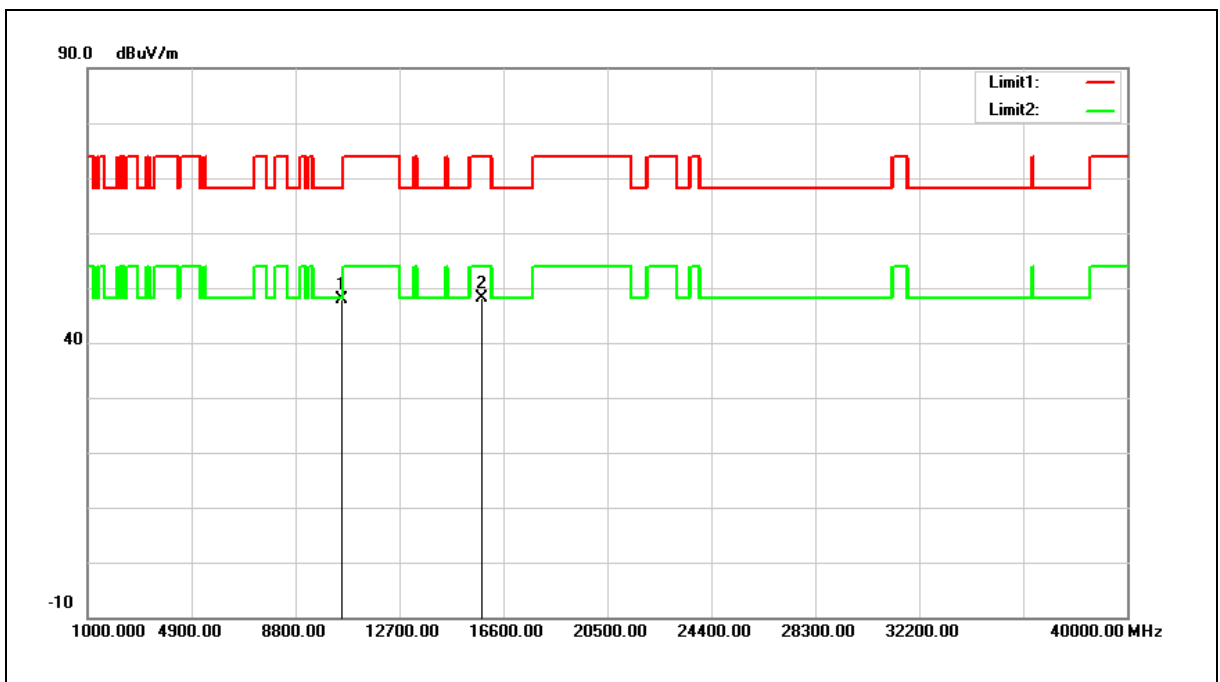


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	35.78	12.06	47.84	68.20	-20.36	peak
2	15780.000	34.06	14.02	48.08	74.00	-25.92	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

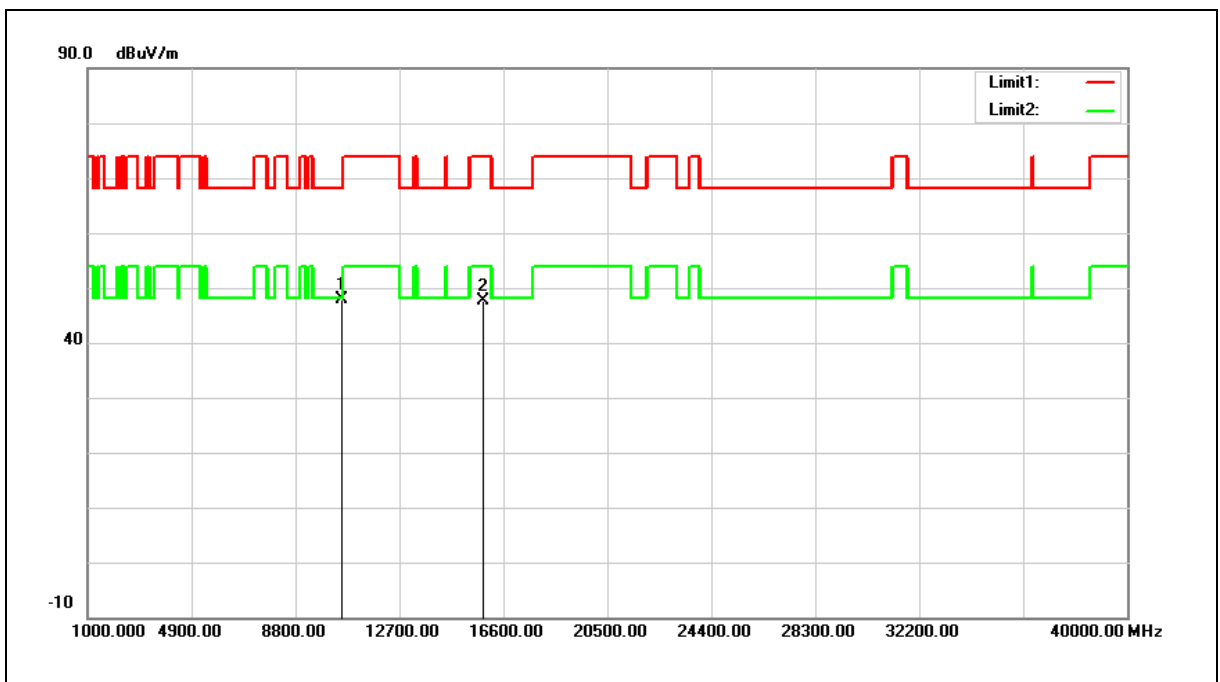


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	35.80	12.09	47.89	68.20	-20.31	peak
2	15840.000	33.75	13.88	47.63	74.00	-26.37	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

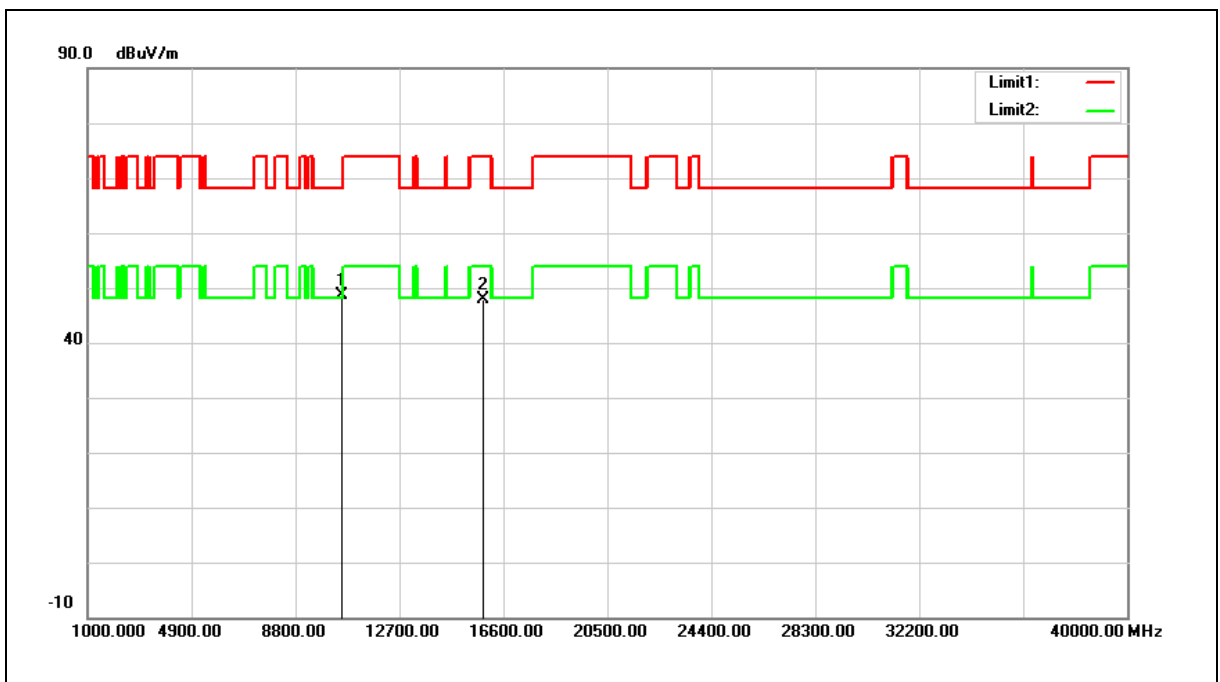


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	36.53	12.09	48.62	68.20	-19.58	peak
2	15840.000	34.05	13.88	47.93	74.00	-26.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

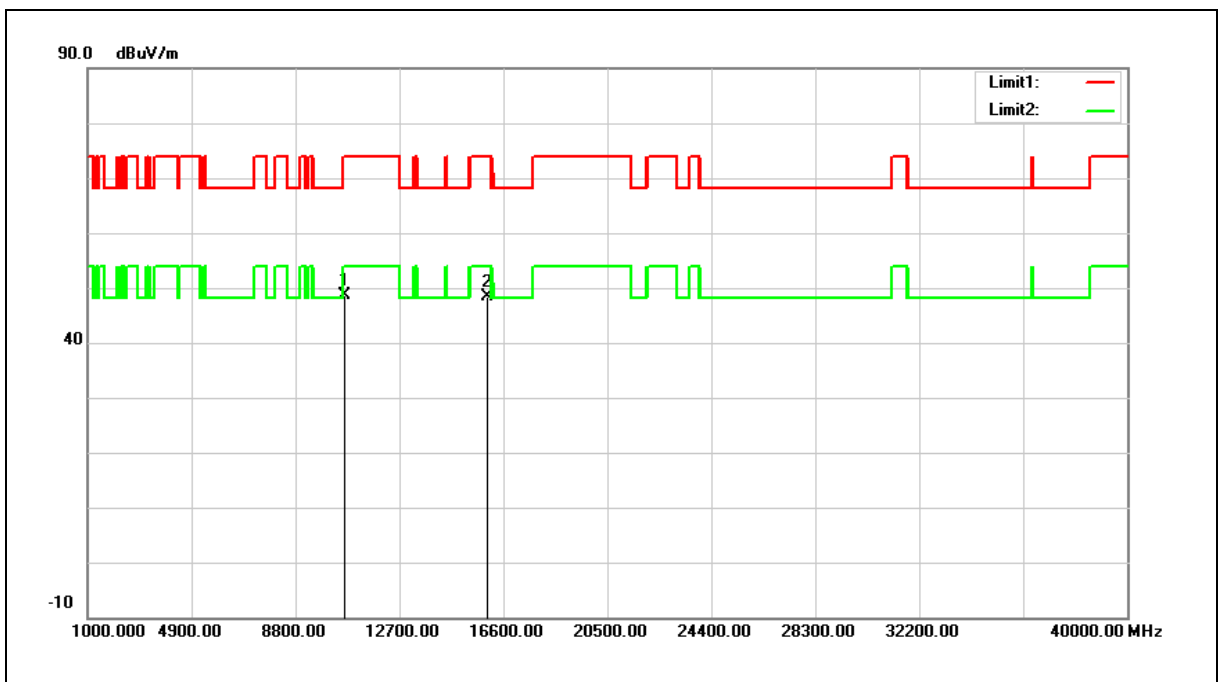


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	36.45	12.14	48.59	74.00	-25.41	peak
2	15960.000	34.71	13.63	48.34	74.00	-25.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

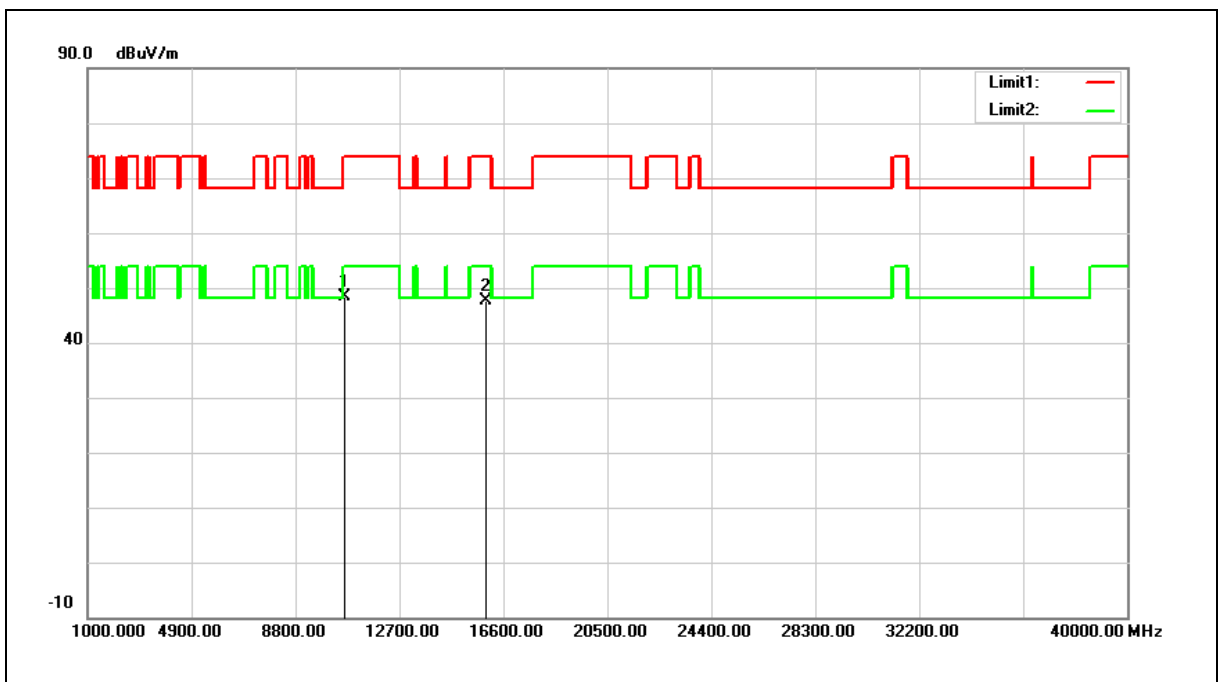


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	36.13	12.14	48.27	74.00	-25.73	peak
2	15960.000	33.89	13.63	47.52	74.00	-26.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

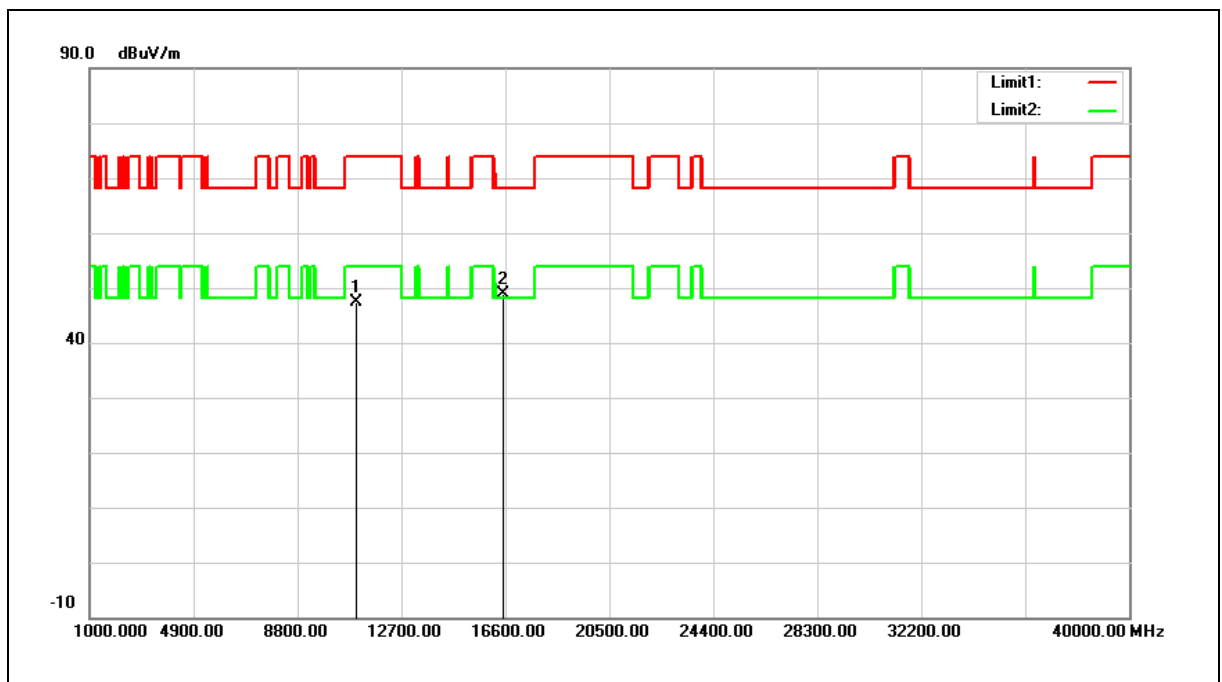


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.95	12.39	47.34	74.00	-26.66	peak
2	16500.000	34.57	14.24	48.81	68.20	-19.39	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

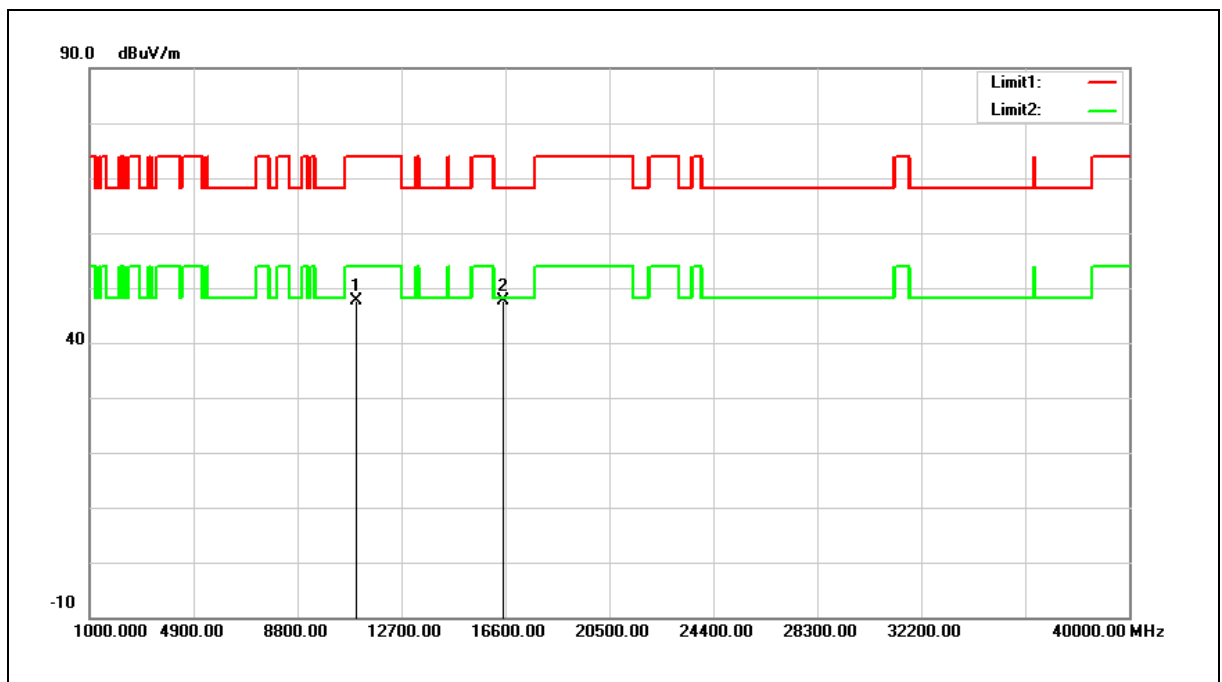


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	35.23	12.39	47.62	74.00	-26.38	peak
2	16500.000	33.44	14.24	47.68	68.20	-20.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

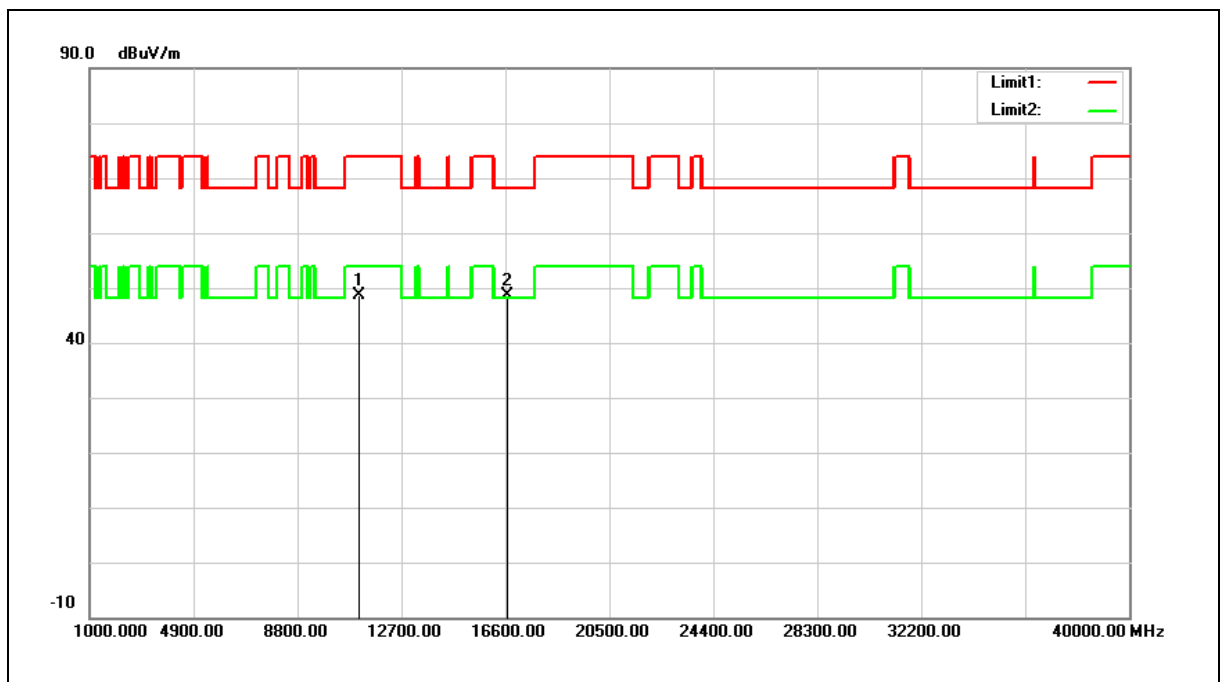


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	36.07	12.46	48.53	74.00	-25.47	peak
2	16680.000	33.32	15.22	48.54	68.20	-19.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

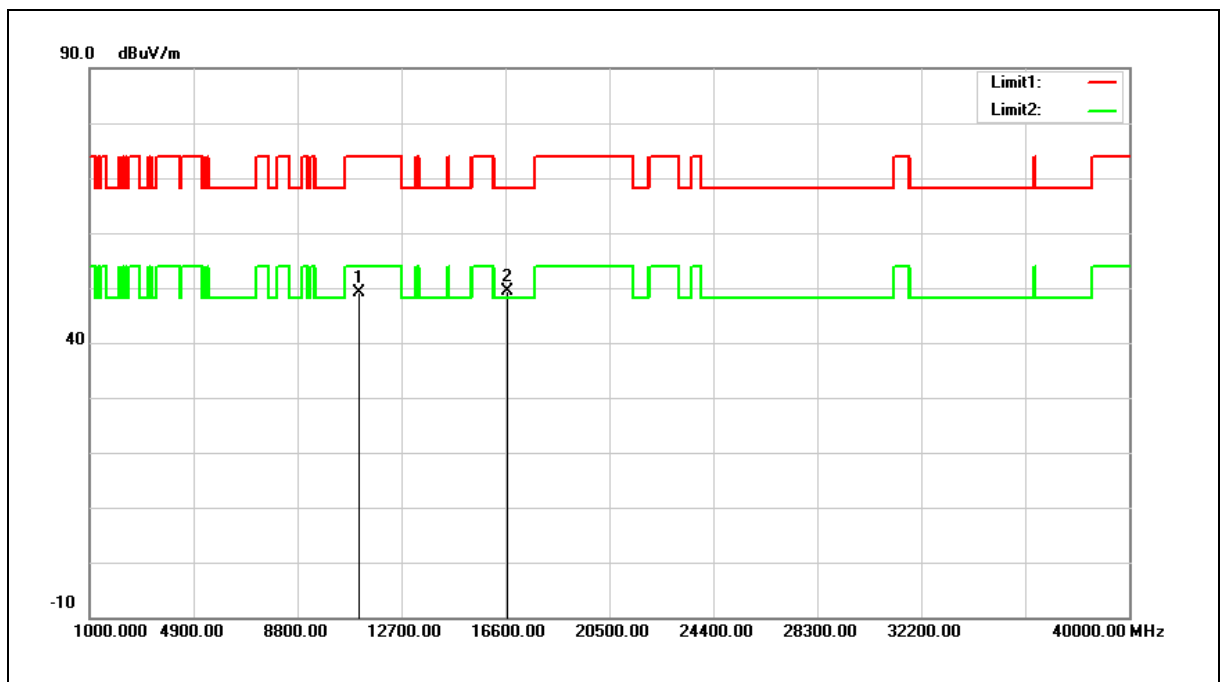


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	36.77	12.46	49.23	74.00	-24.77	peak
2	16680.000	34.04	15.22	49.26	68.20	-18.94	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

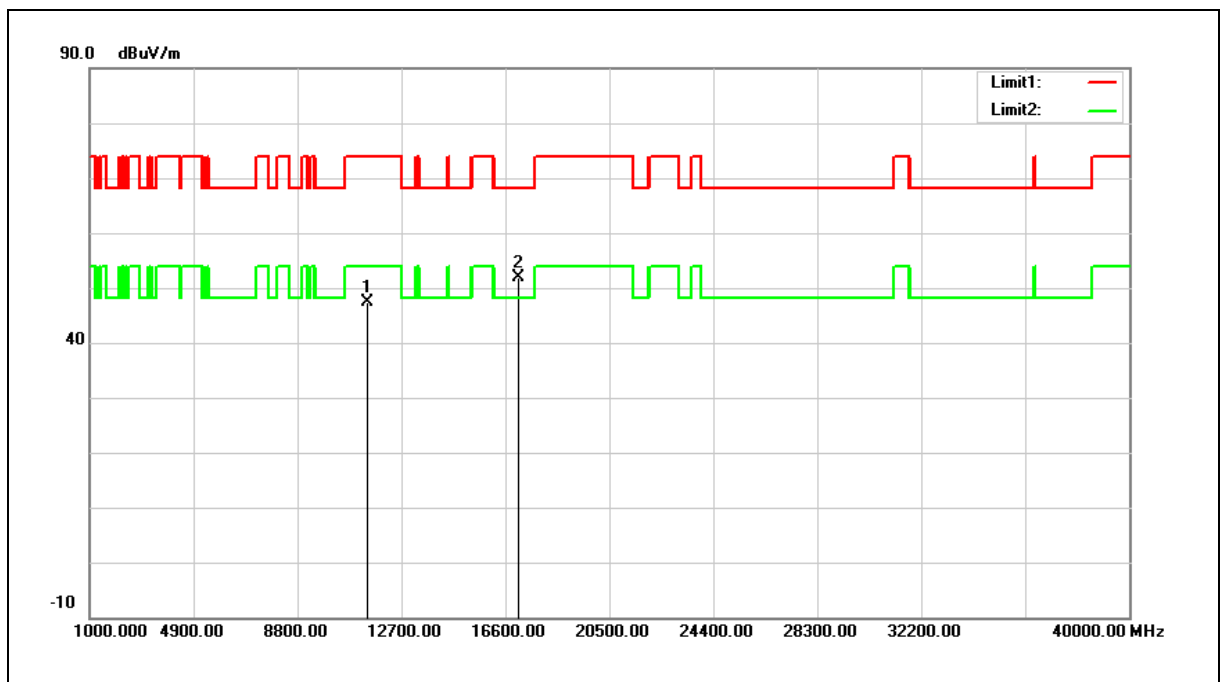


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	34.85	12.63	47.48	74.00	-26.52	peak
2	17100.000	34.22	17.63	51.85	68.20	-16.35	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

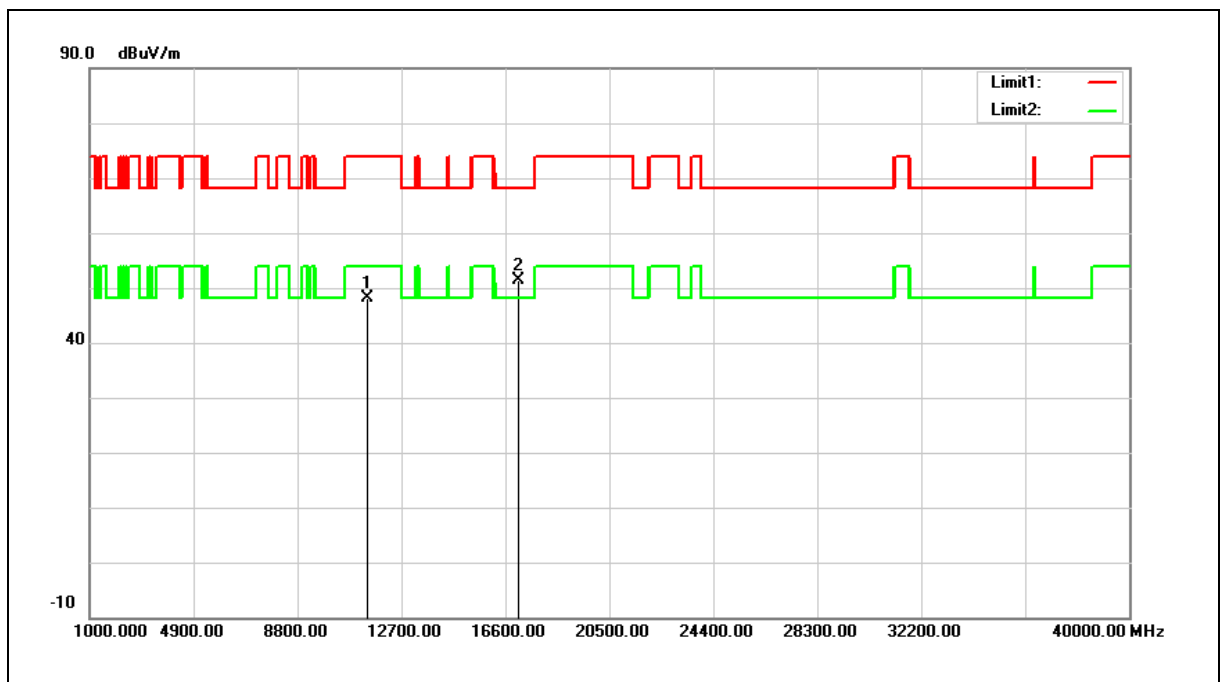


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	35.45	12.63	48.08	74.00	-25.92	peak
2	17100.000	33.81	17.63	51.44	68.20	-16.76	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

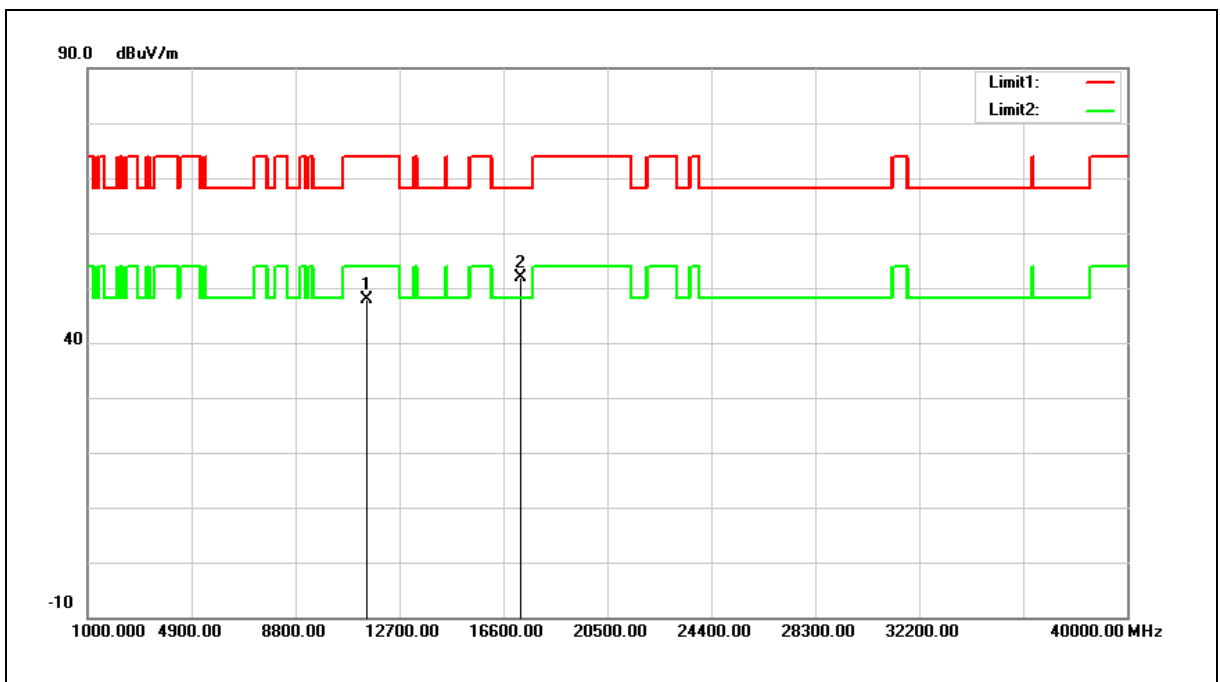


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.28	12.68	47.96	74.00	-26.04	peak
2	17235.000	33.38	18.52	51.90	68.20	-16.30	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

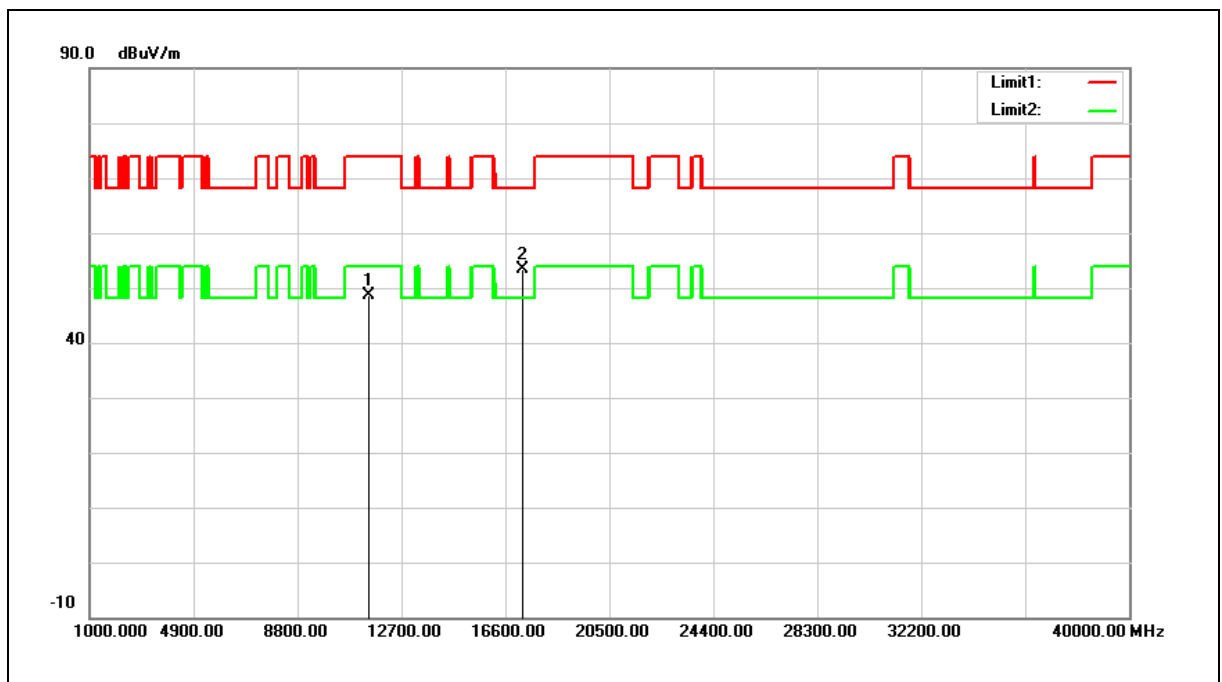


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.96	12.68	48.64	74.00	-25.36	peak
2	17235.000	34.77	18.52	53.29	68.20	-14.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

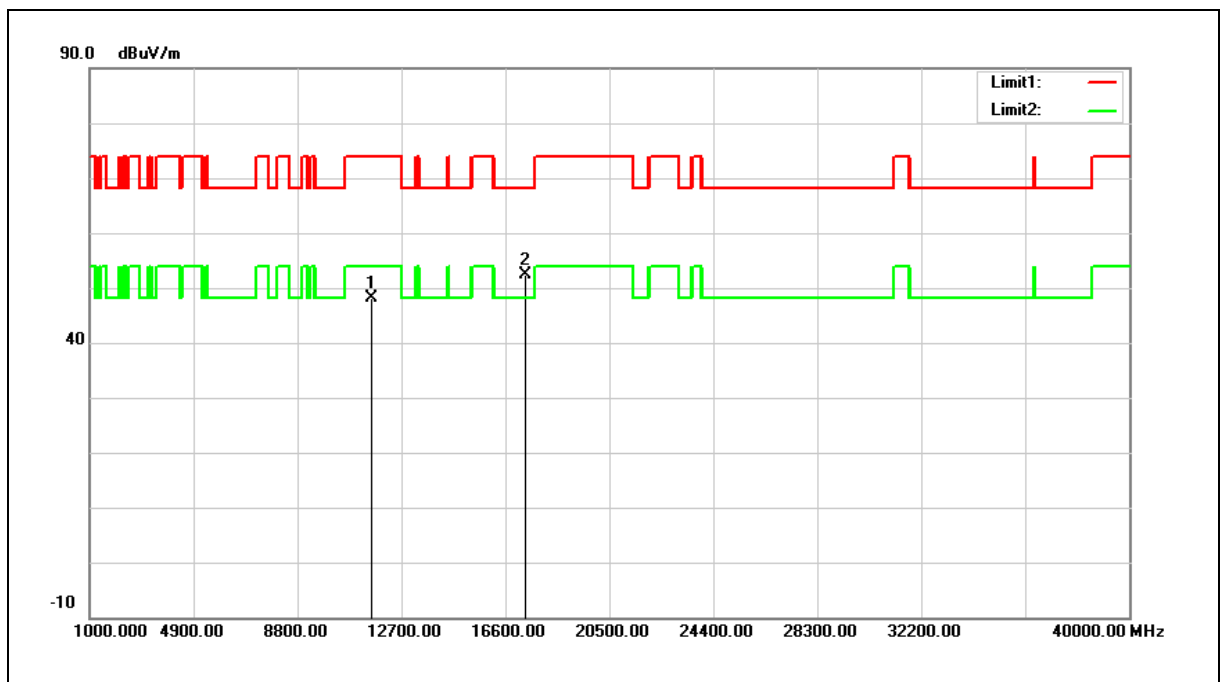


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.47	12.59	48.06	74.00	-25.94	peak
2	17355.000	33.06	19.32	52.38	68.20	-15.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

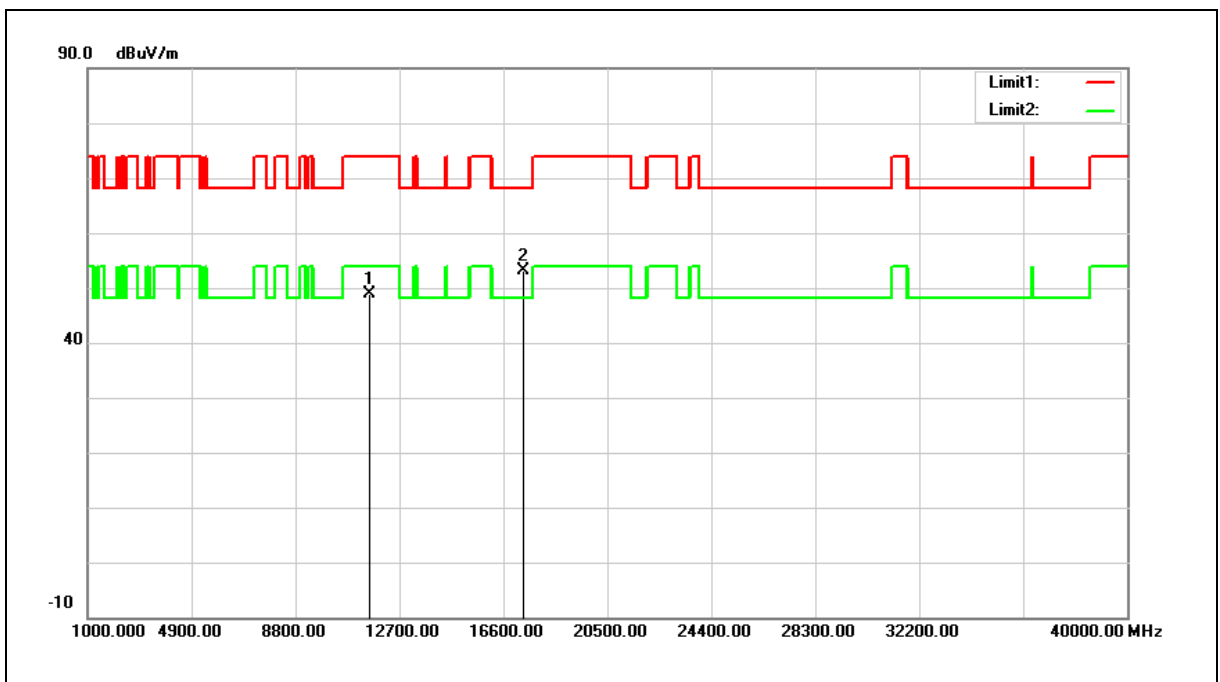


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	36.35	12.59	48.94	74.00	-25.06	peak
2	17355.000	33.77	19.32	53.09	68.20	-15.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

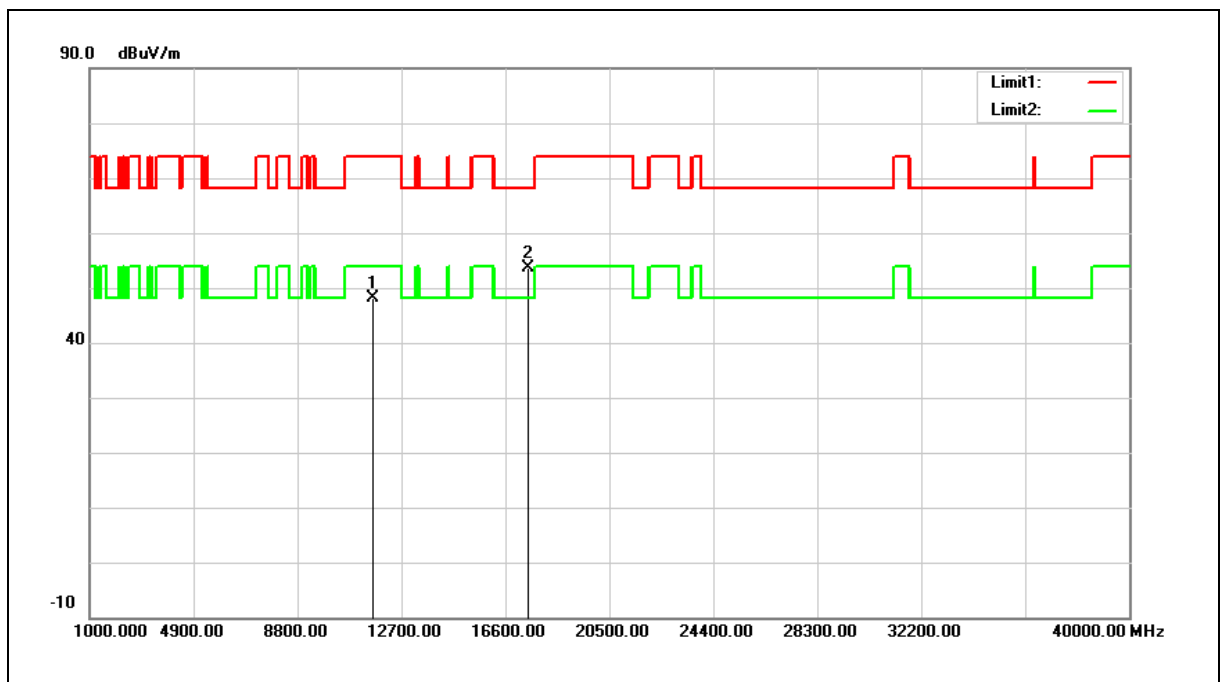


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.67	12.48	48.15	74.00	-25.85	peak
2	17475.000	33.44	20.13	53.57	68.20	-14.63	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

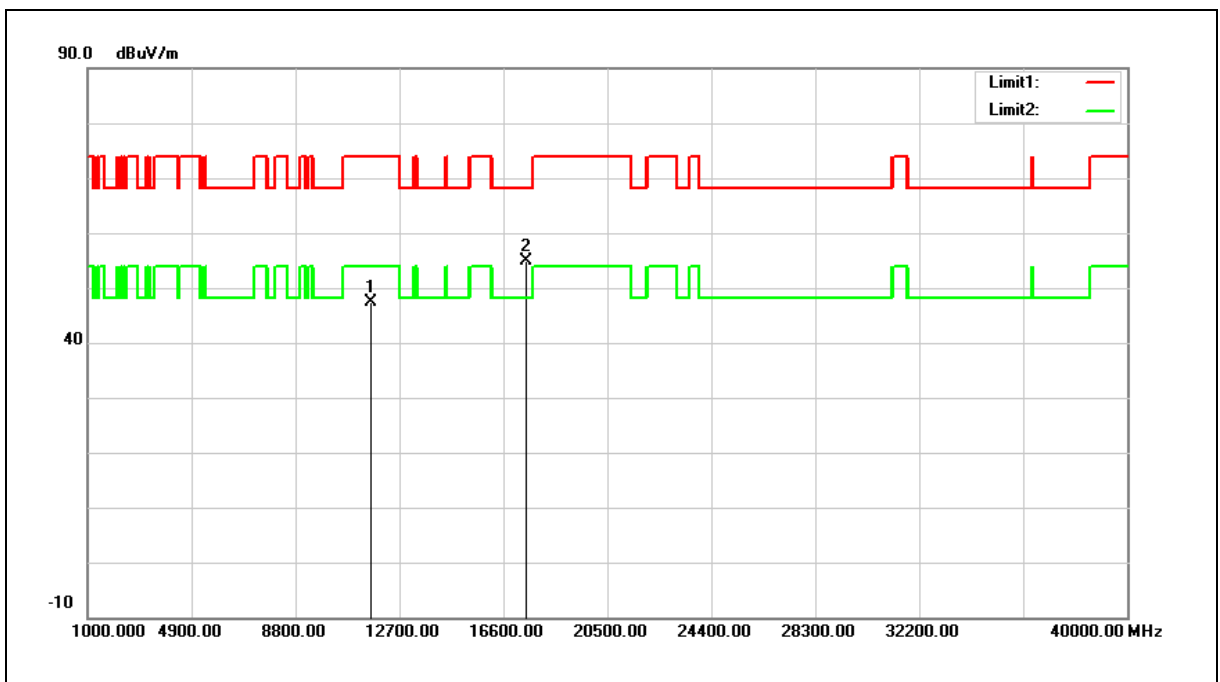


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.02	12.48	47.50	74.00	-26.50	peak
2	17475.000	34.67	20.13	54.80	68.20	-13.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

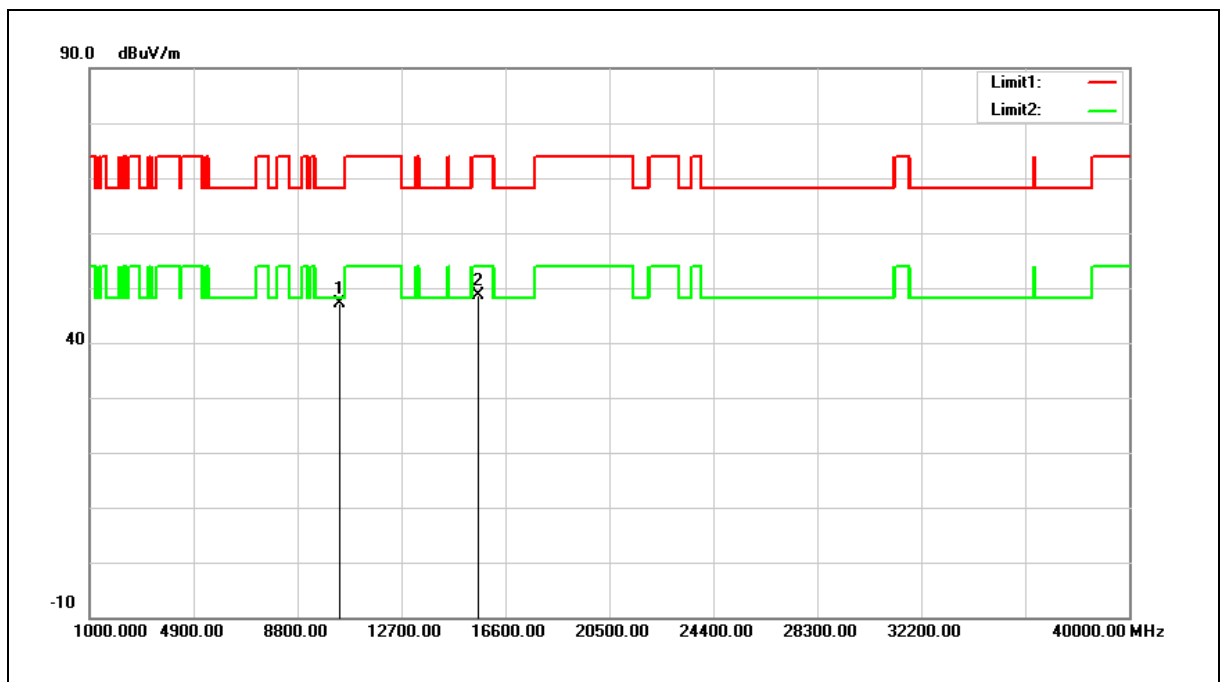


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	35.43	11.75	47.18	68.20	-21.02	peak
2	15570.000	34.20	14.45	48.65	74.00	-25.35	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

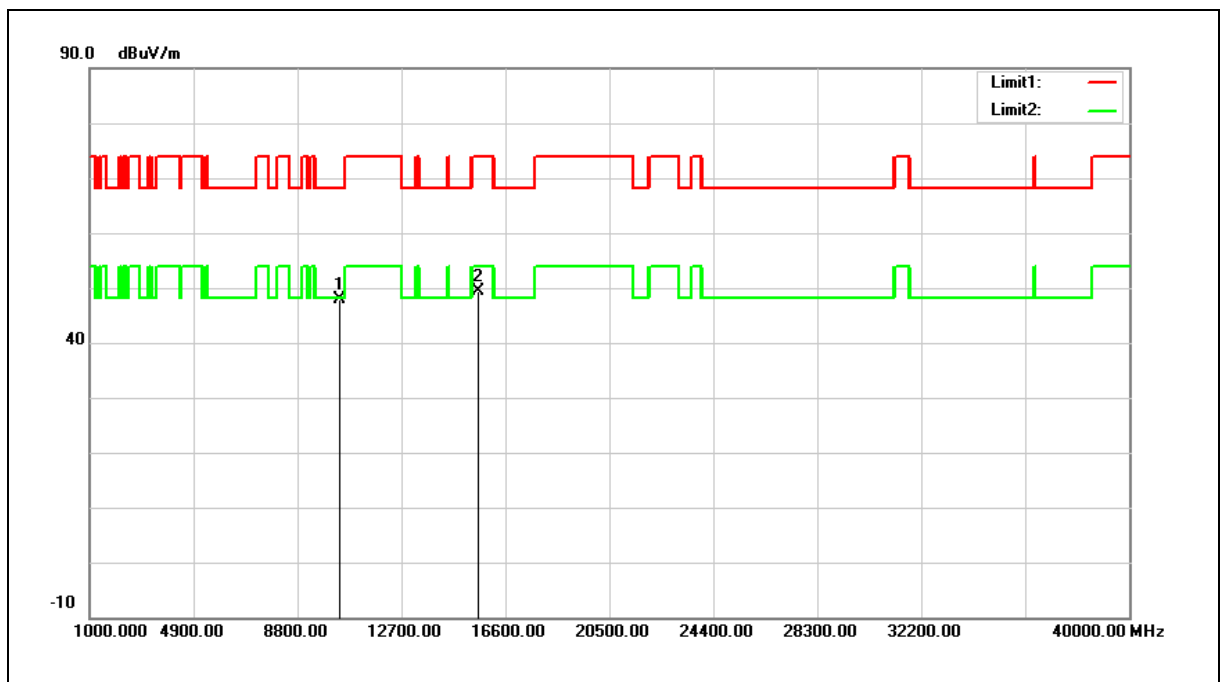


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	36.09	11.75	47.84	68.20	-20.36	peak
2	15570.000	35.03	14.45	49.48	74.00	-24.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

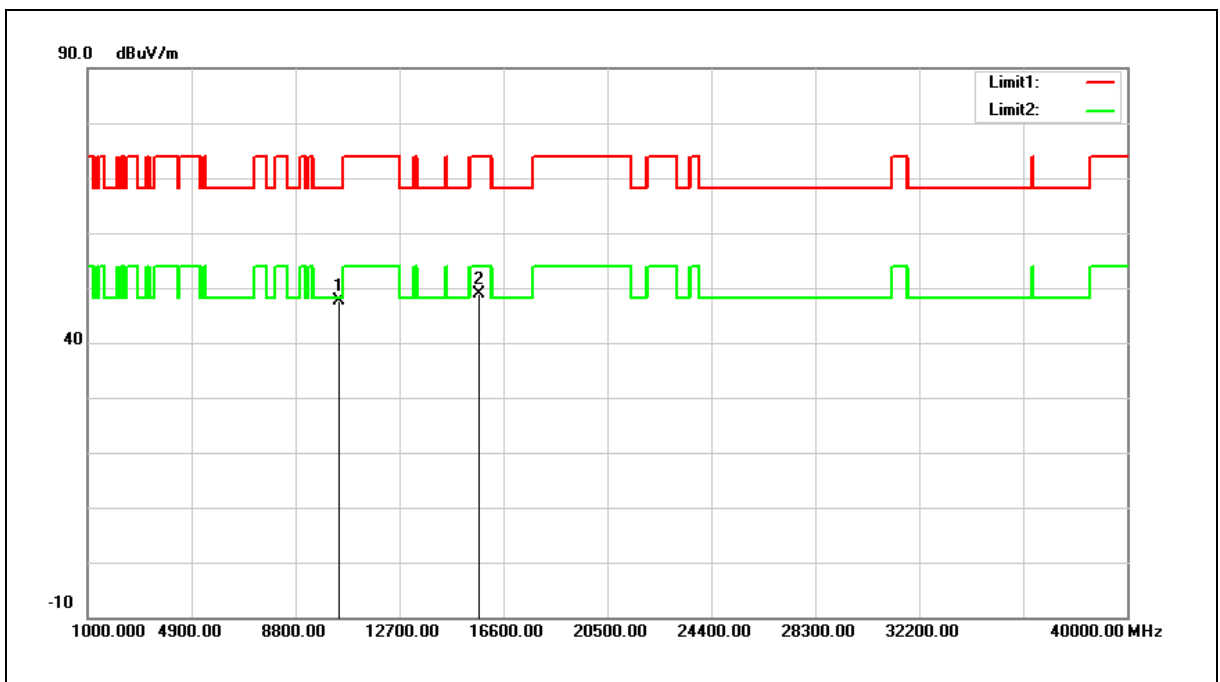


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	35.60	11.95	47.55	68.20	-20.65	peak
2	15690.000	34.58	14.19	48.77	74.00	-25.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

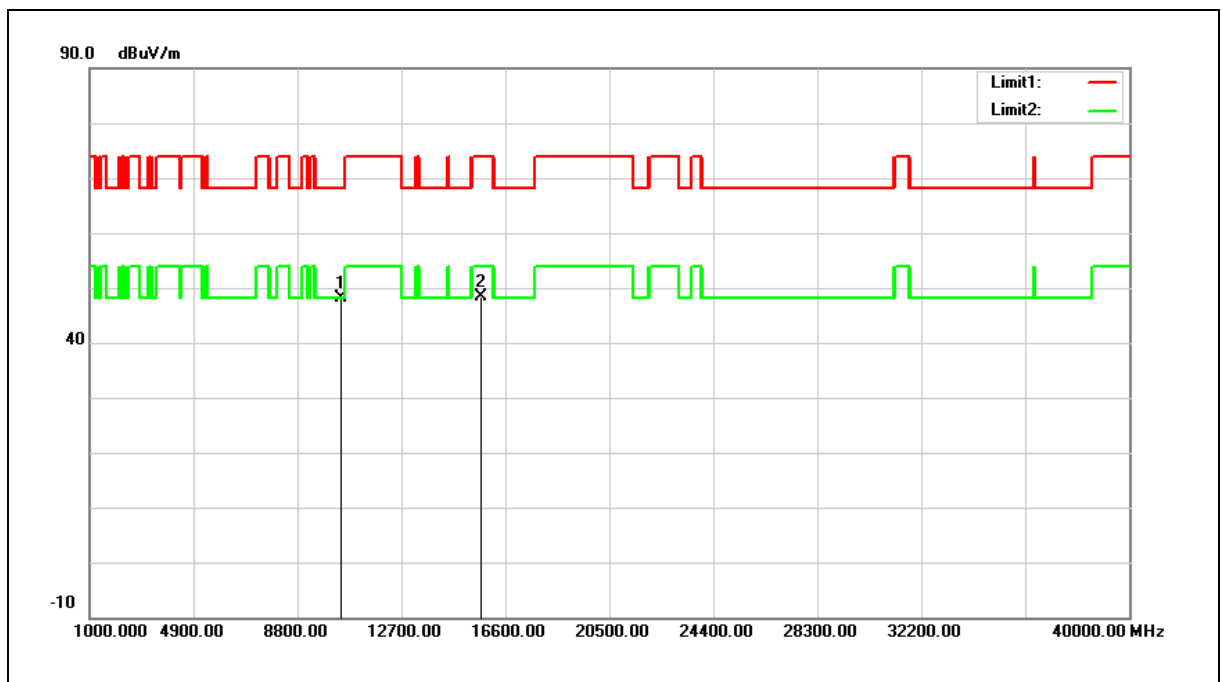


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	36.12	11.95	48.07	68.20	-20.13	peak
2	15690.000	34.22	14.19	48.41	74.00	-25.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

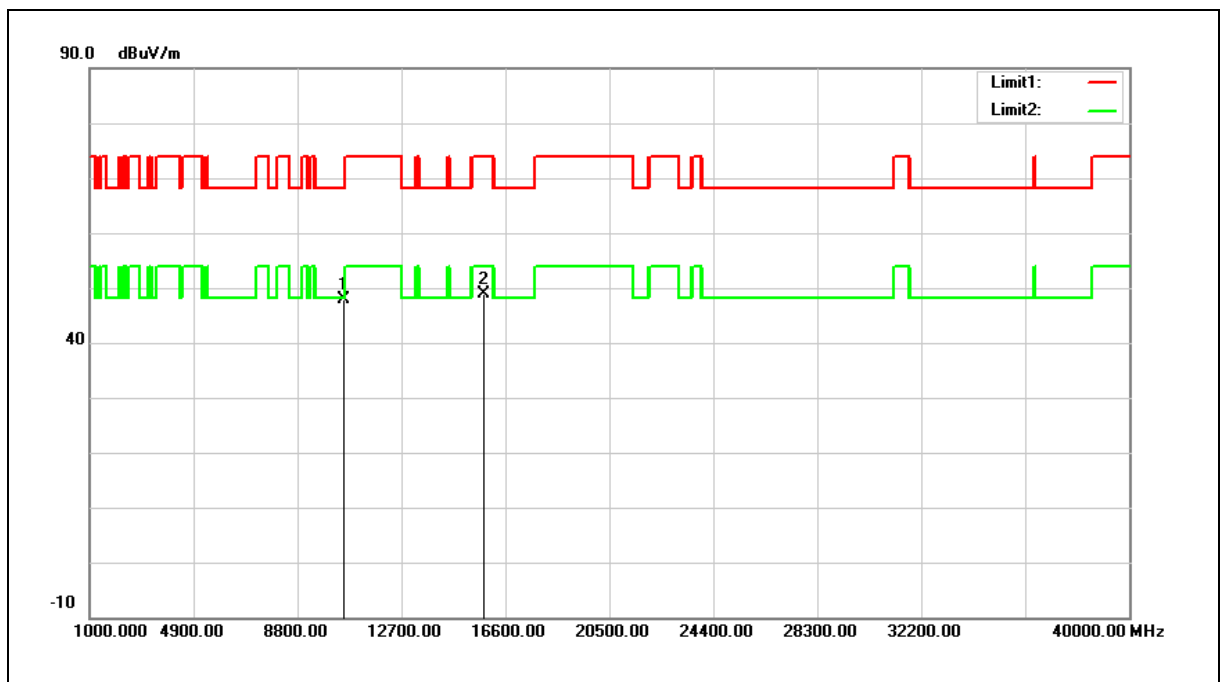


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	35.80	12.06	47.86	68.20	-20.34	peak
2	15810.000	34.81	13.96	48.77	74.00	-25.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

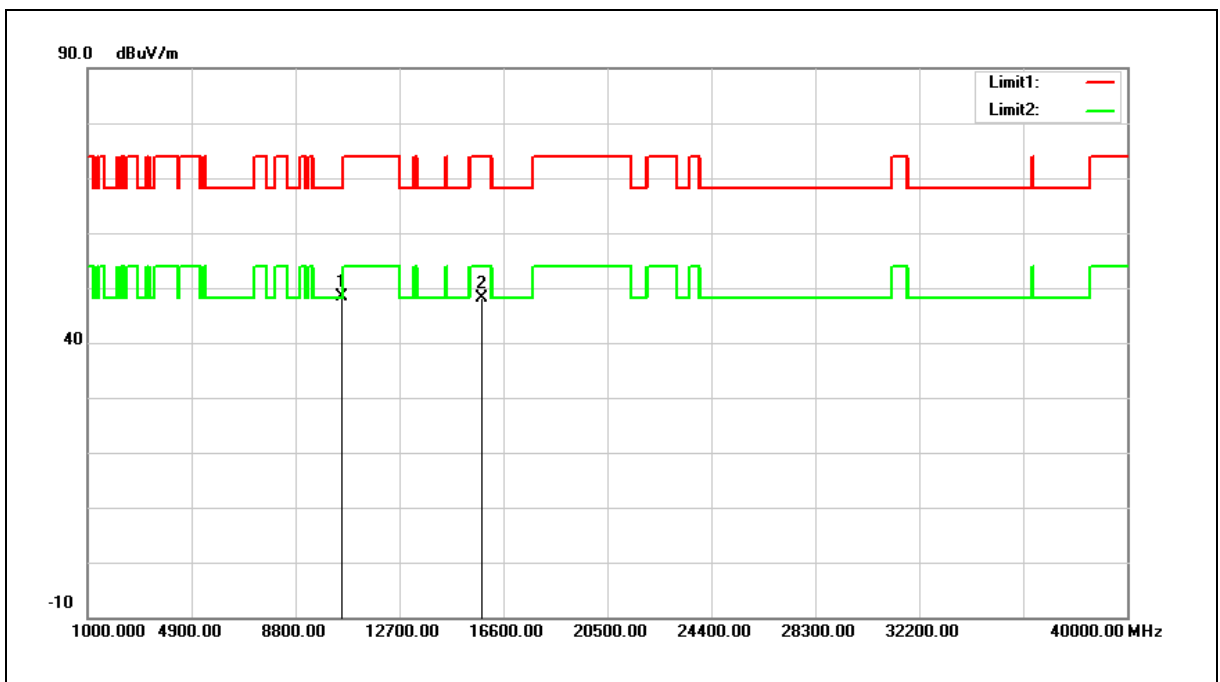


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	36.31	12.06	48.37	68.20	-19.83	peak
2	15810.000	34.27	13.96	48.23	74.00	-25.77	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

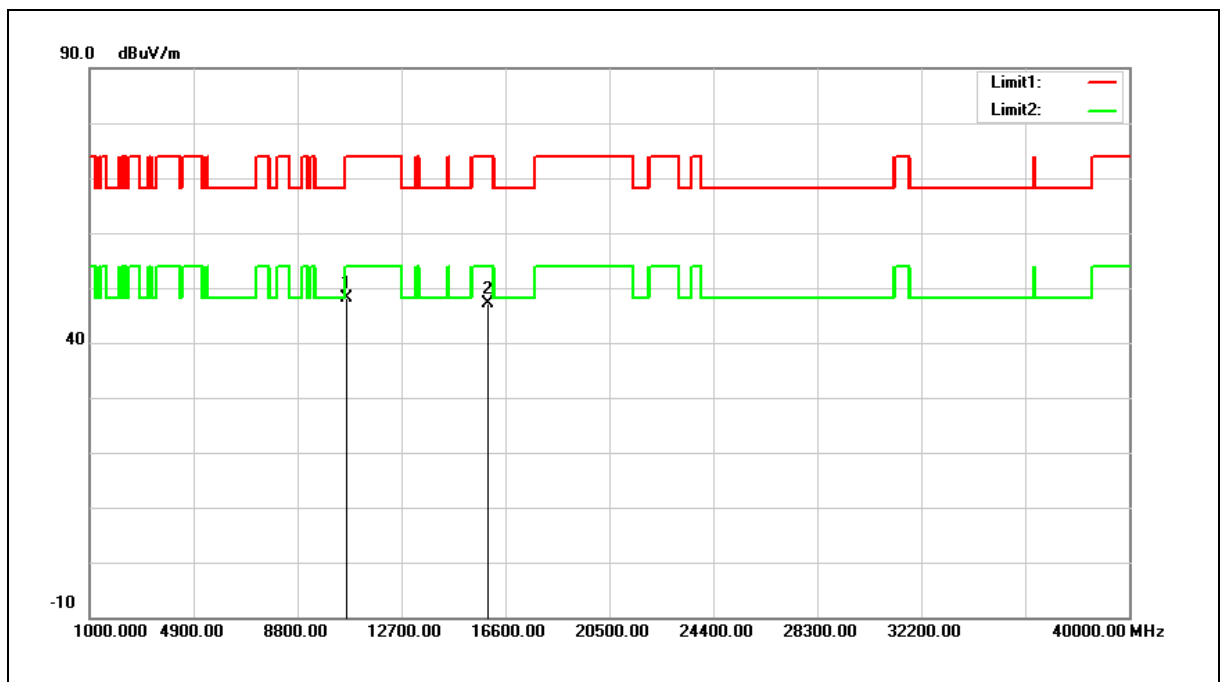


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	36.01	12.12	48.13	74.00	-25.87	peak
2	15930.000	33.55	13.70	47.25	74.00	-26.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

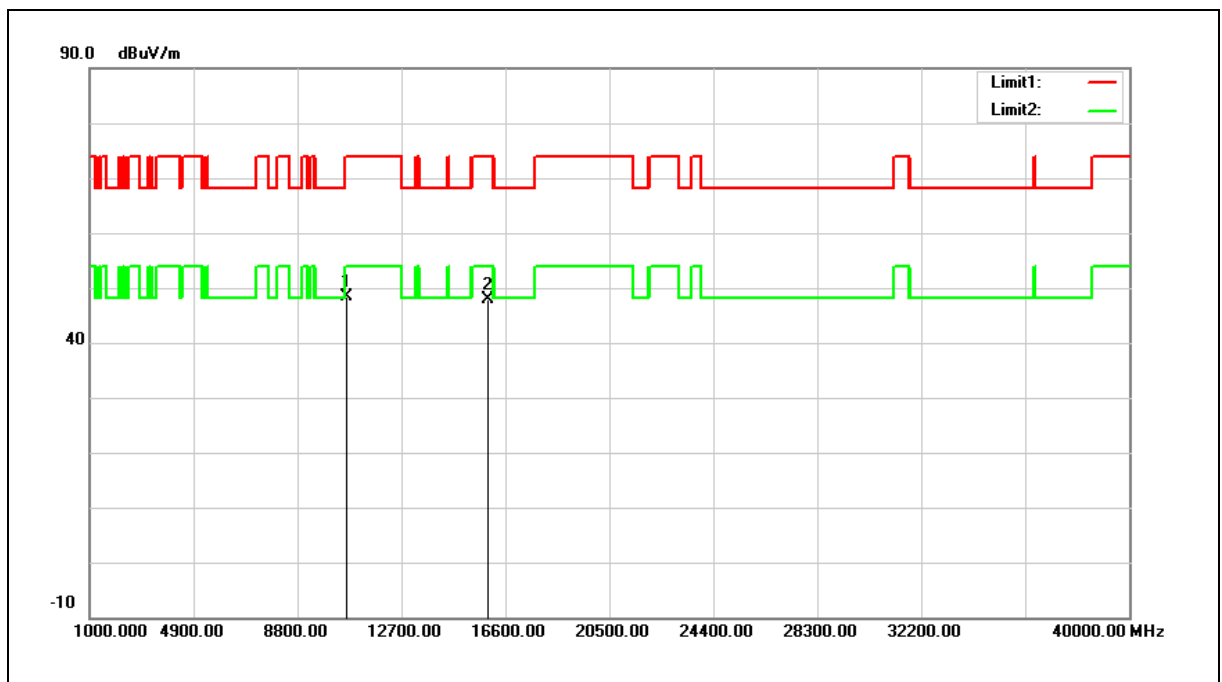


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	36.34	12.12	48.46	74.00	-25.54	peak
2	15930.000	34.19	13.70	47.89	74.00	-26.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

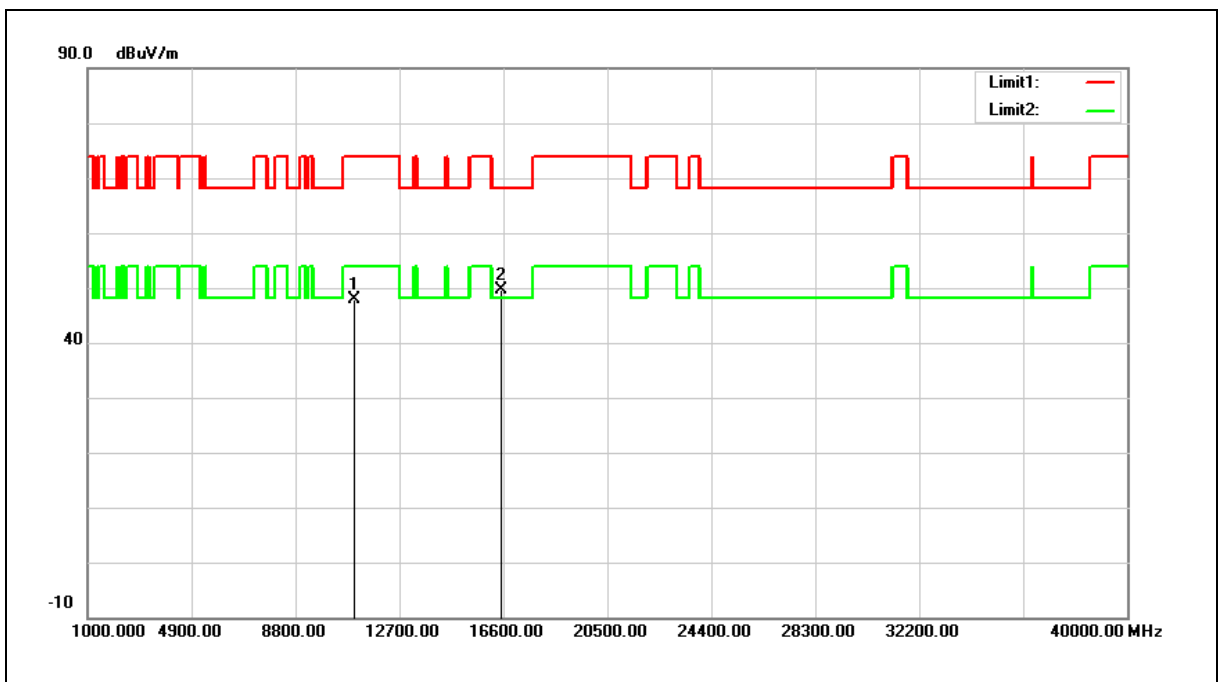


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	35.58	12.40	47.98	74.00	-26.02	peak
2	16530.000	35.22	14.41	49.63	68.20	-18.57	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

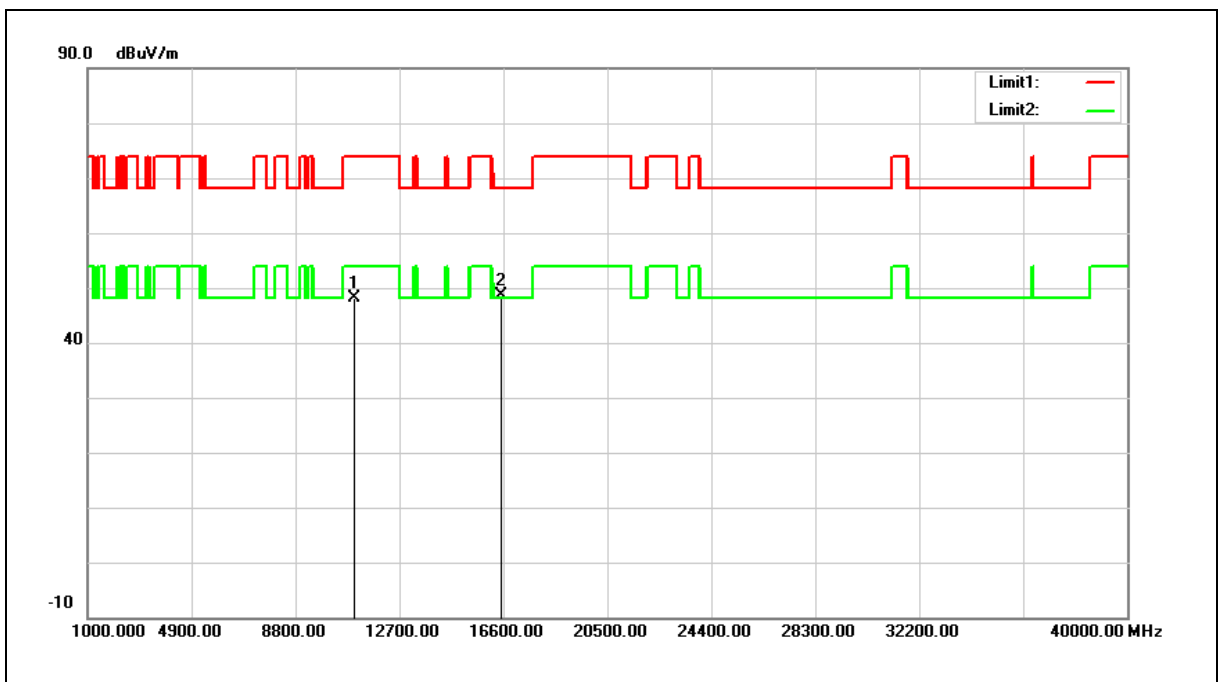


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	35.83	12.40	48.23	74.00	-25.77	peak
2	16530.000	34.31	14.41	48.72	68.20	-19.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

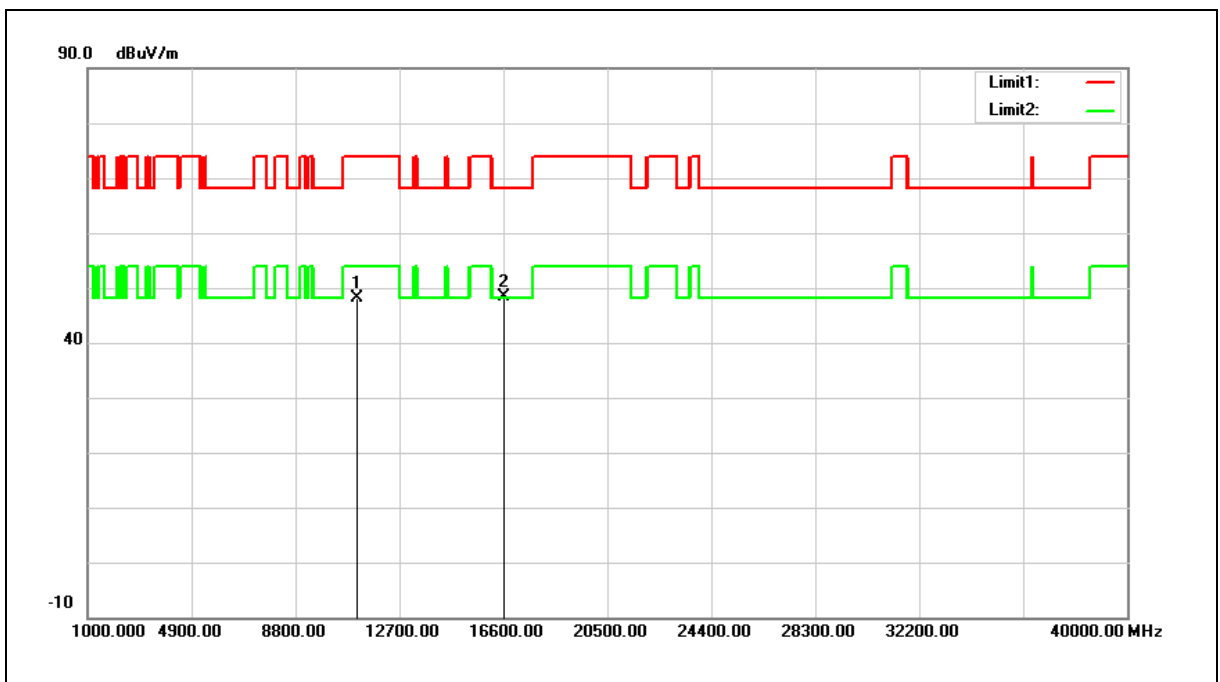


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	35.68	12.45	48.13	74.00	-25.87	peak
2	16650.000	33.40	15.06	48.46	68.20	-19.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

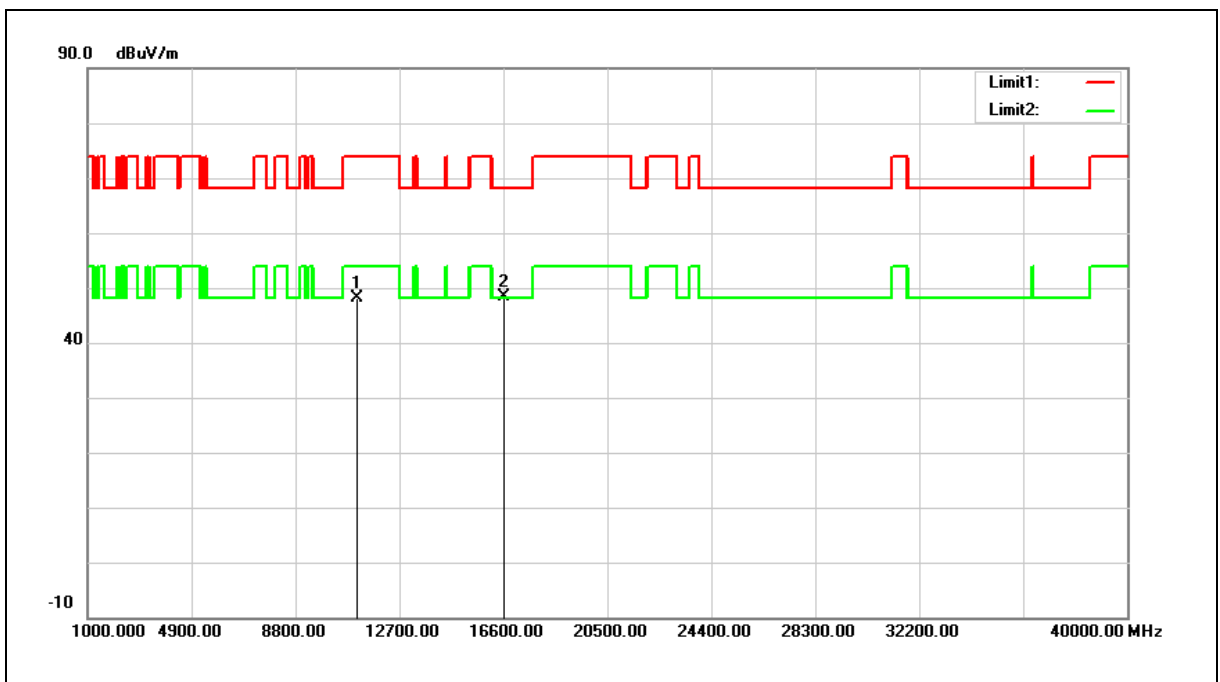


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	35.65	12.45	48.10	74.00	-25.90	peak
2	16650.000	33.22	15.06	48.28	68.20	-19.92	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

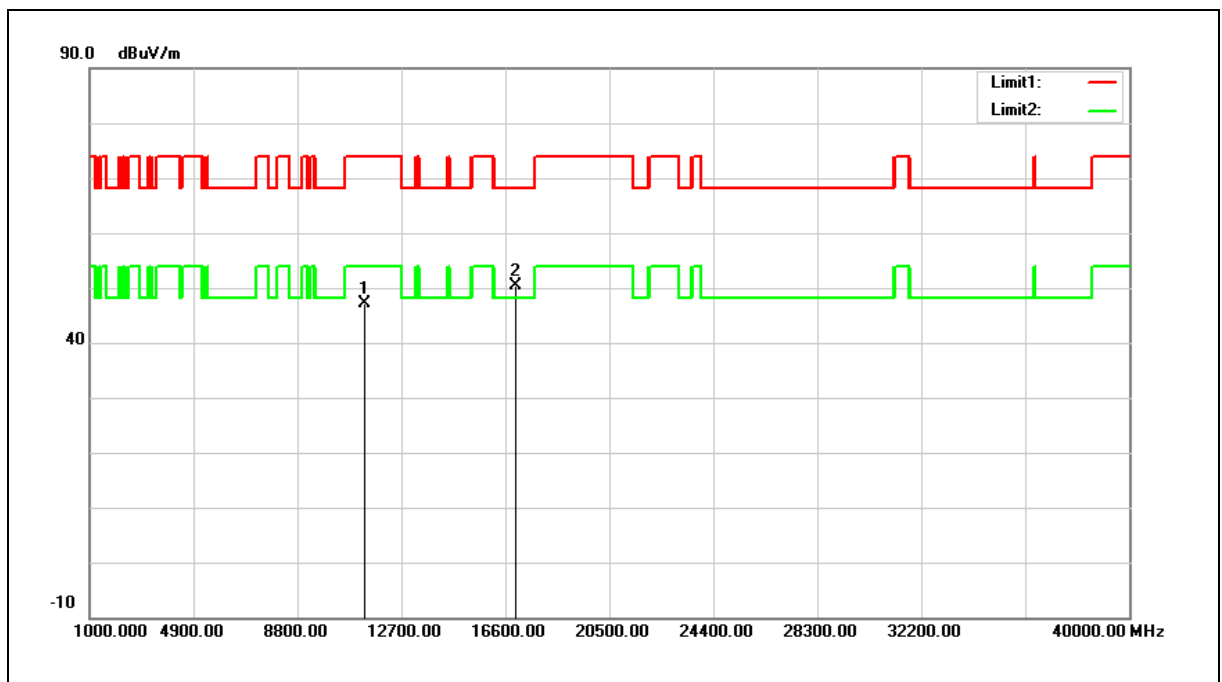


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	34.42	12.59	47.01	74.00	-26.99	peak
2	17010.000	33.48	17.02	50.50	68.20	-17.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

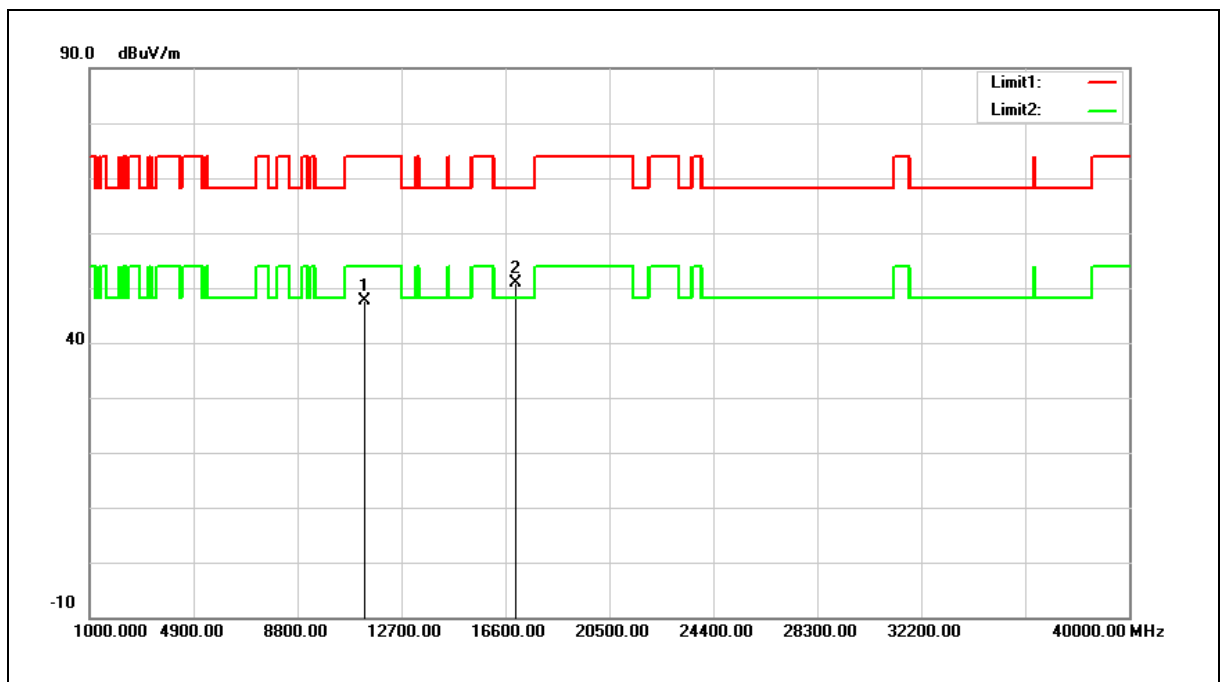


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	34.98	12.59	47.57	74.00	-26.43	peak
2	17010.000	33.82	17.02	50.84	68.20	-17.36	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

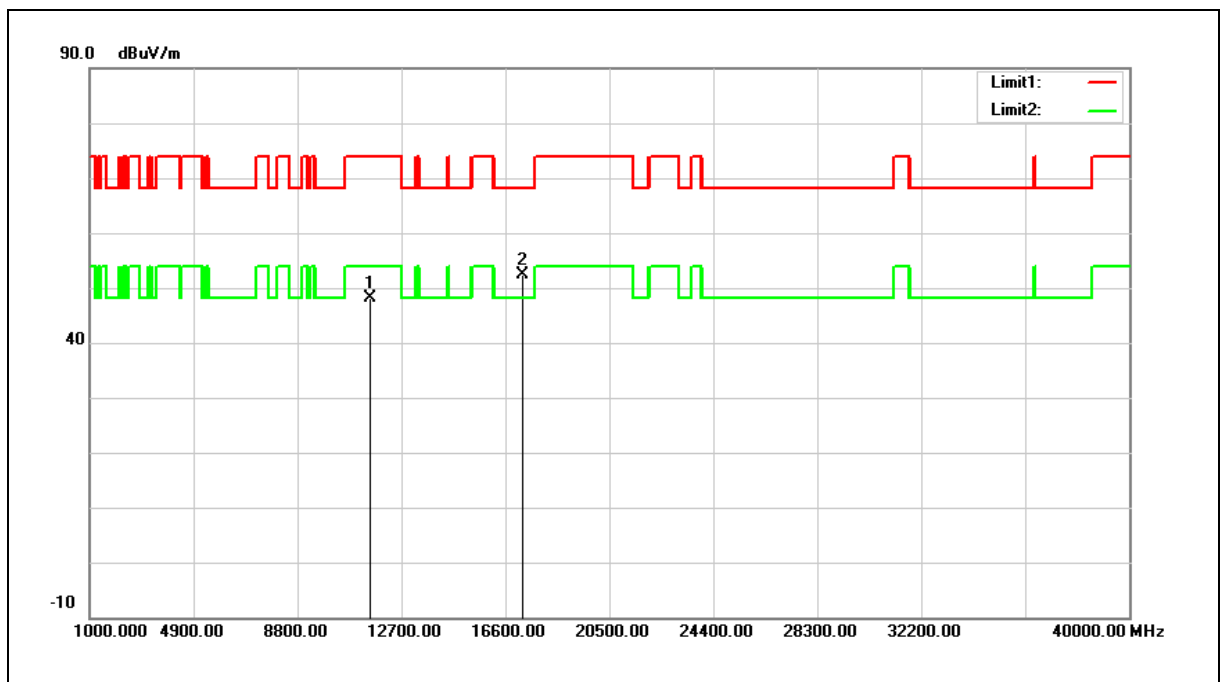


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	35.44	12.68	48.12	74.00	-25.88	peak
2	17265.000	33.68	18.72	52.40	68.20	-15.80	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

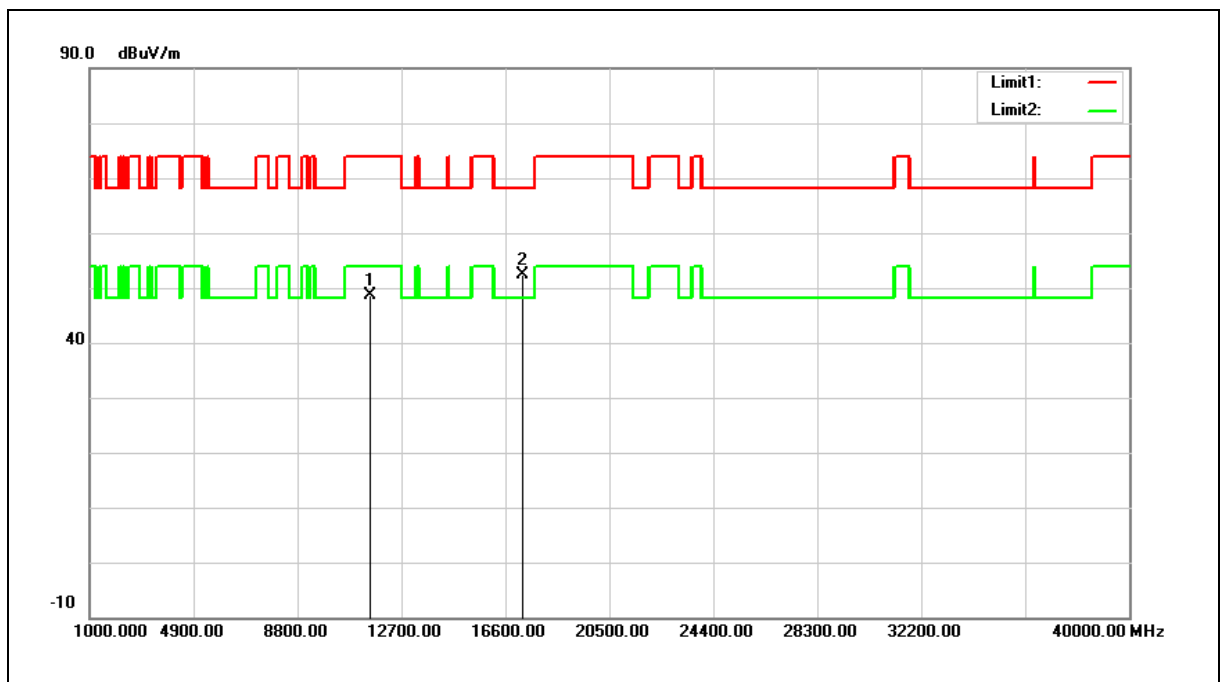


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	36.03	12.68	48.71	74.00	-25.29	peak
2	17265.000	33.58	18.72	52.30	68.20	-15.90	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

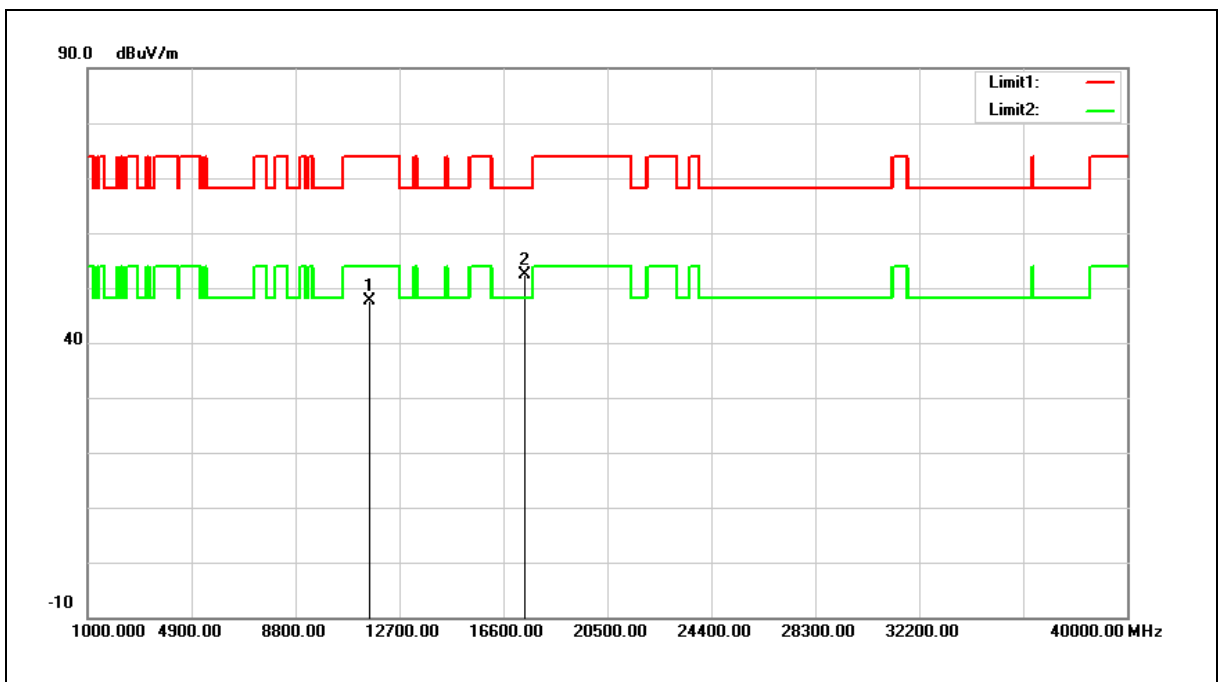


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	34.99	12.56	47.55	74.00	-26.45	peak
2	17385.000	32.81	19.52	52.33	68.20	-15.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

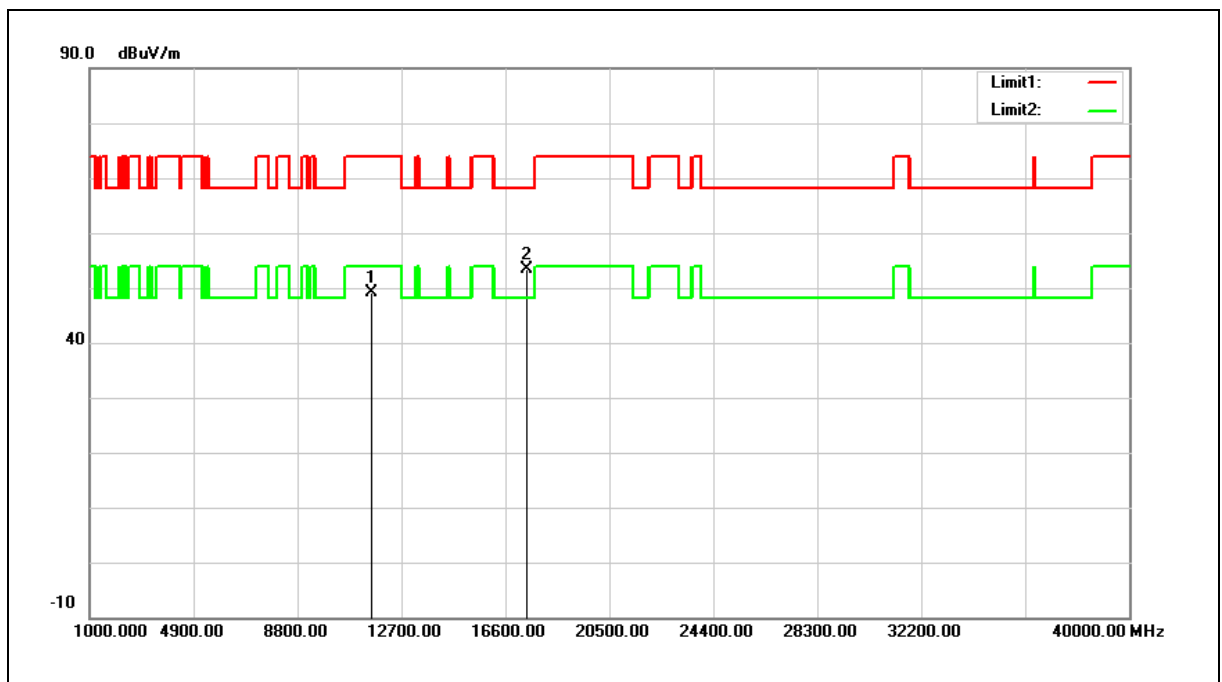


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	36.53	12.56	49.09	74.00	-24.91	peak
2	17385.000	33.76	19.52	53.28	68.20	-14.92	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

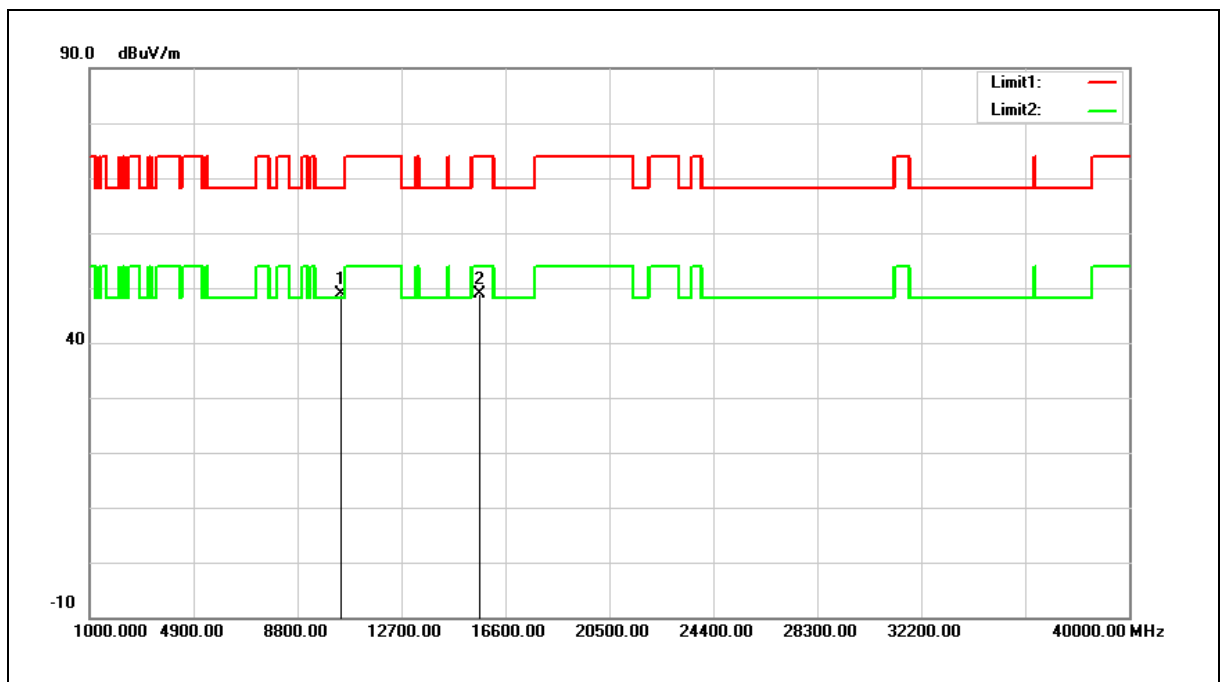


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	37.01	11.85	48.86	68.20	-19.34	peak
2	15630.000	34.65	14.33	48.98	74.00	-25.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

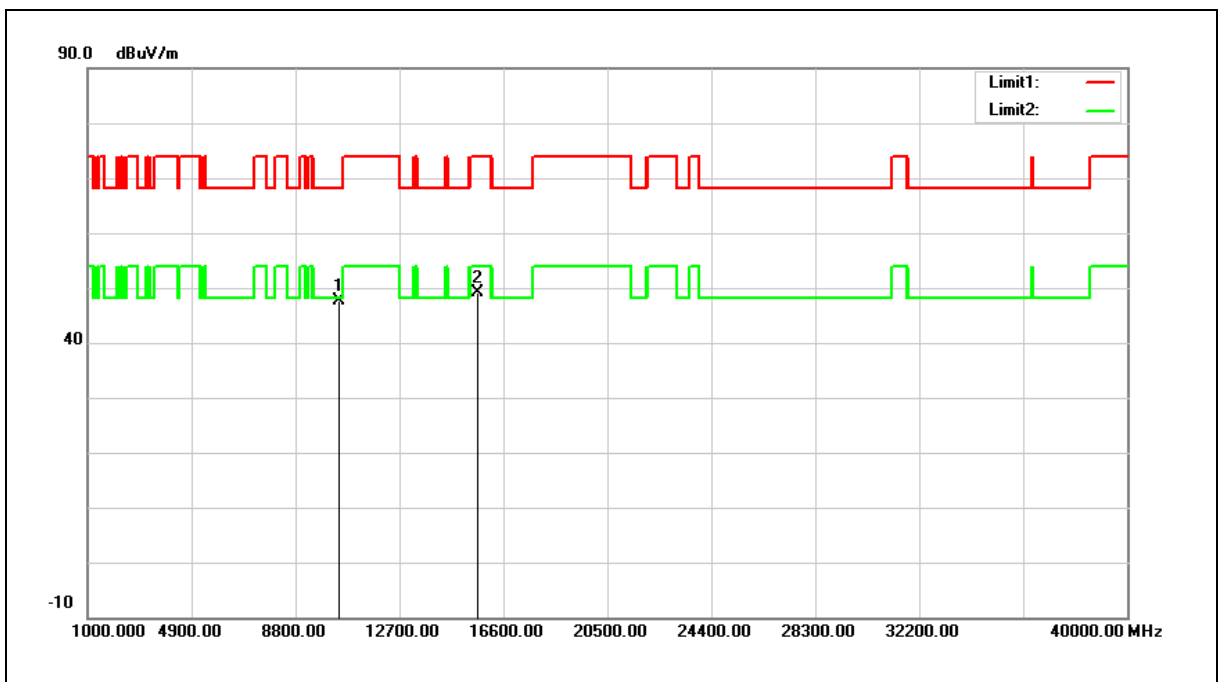


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	35.73	11.85	47.58	68.20	-20.62	peak
2	15630.000	34.78	14.33	49.11	74.00	-24.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

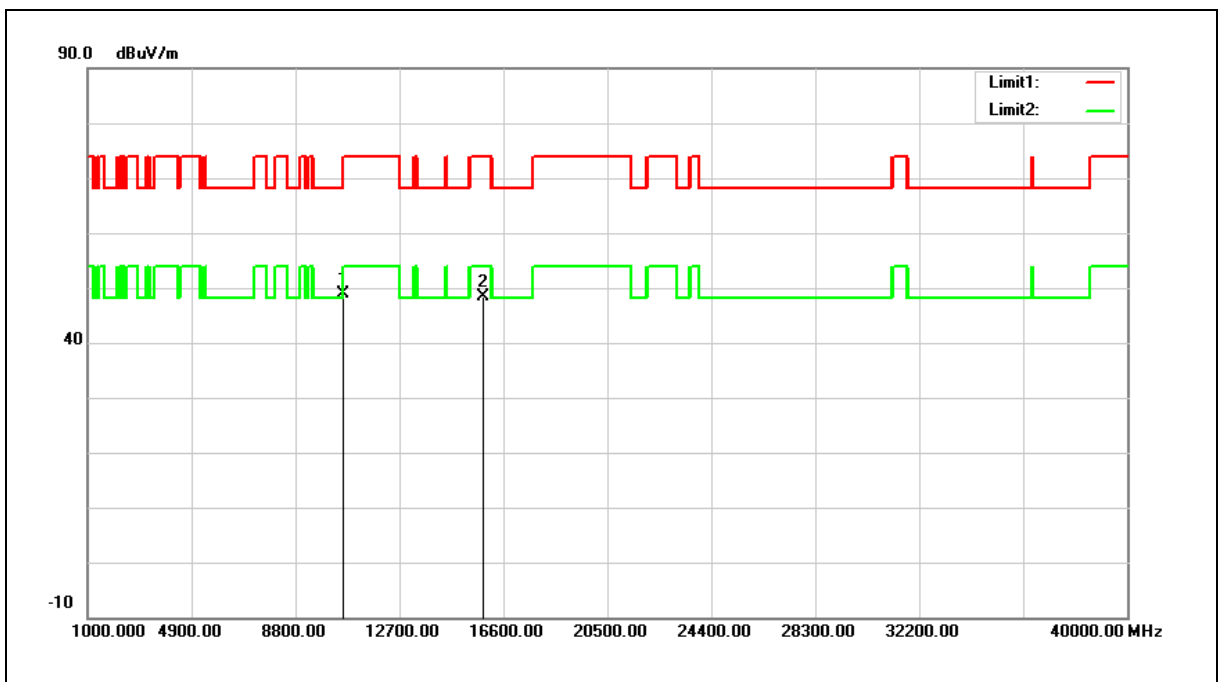


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	36.76	12.10	48.86	68.20	-19.34	peak
2	15870.000	34.58	13.82	48.40	74.00	-25.60	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

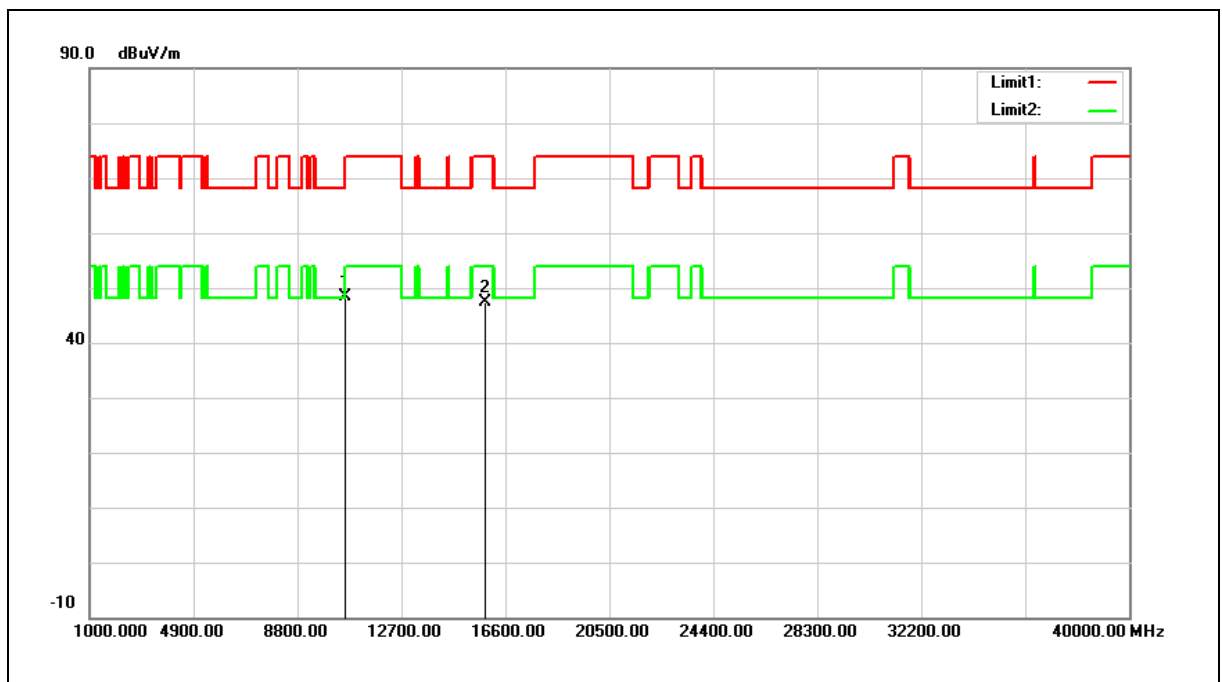


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	36.20	12.10	48.30	68.20	-19.90	peak
2	15870.000	33.54	13.82	47.36	74.00	-26.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

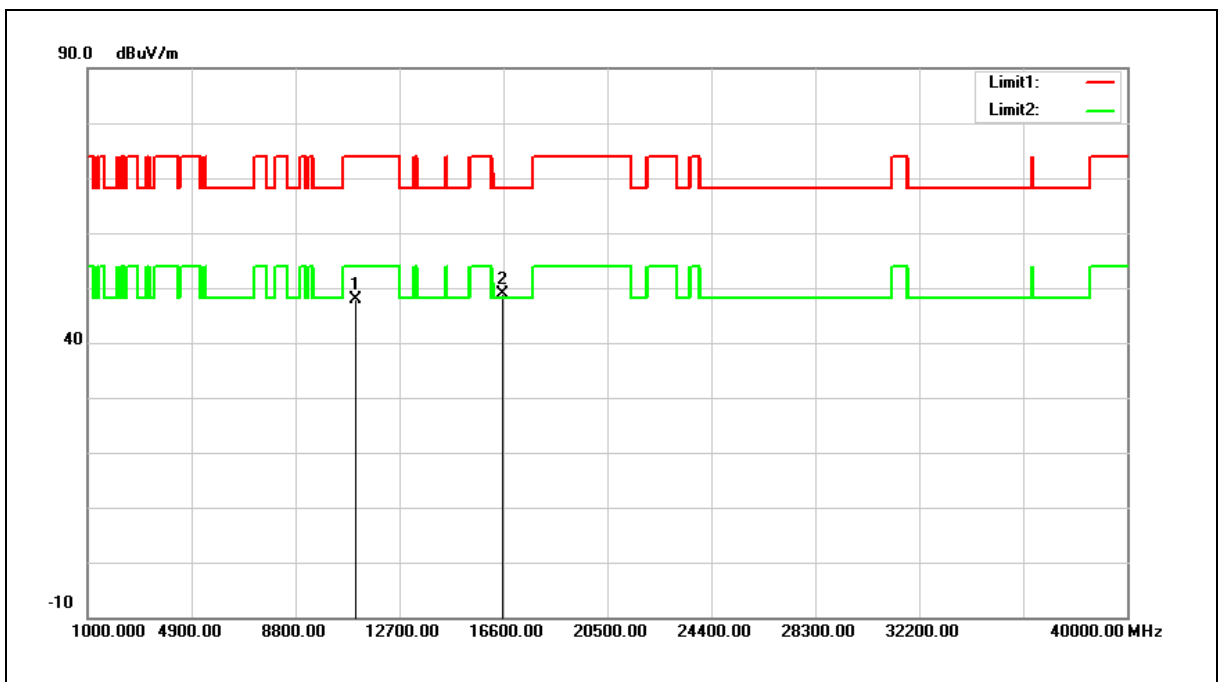


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	35.57	12.43	48.00	74.00	-26.00	peak
2	16590.000	34.09	14.73	48.82	68.20	-19.38	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

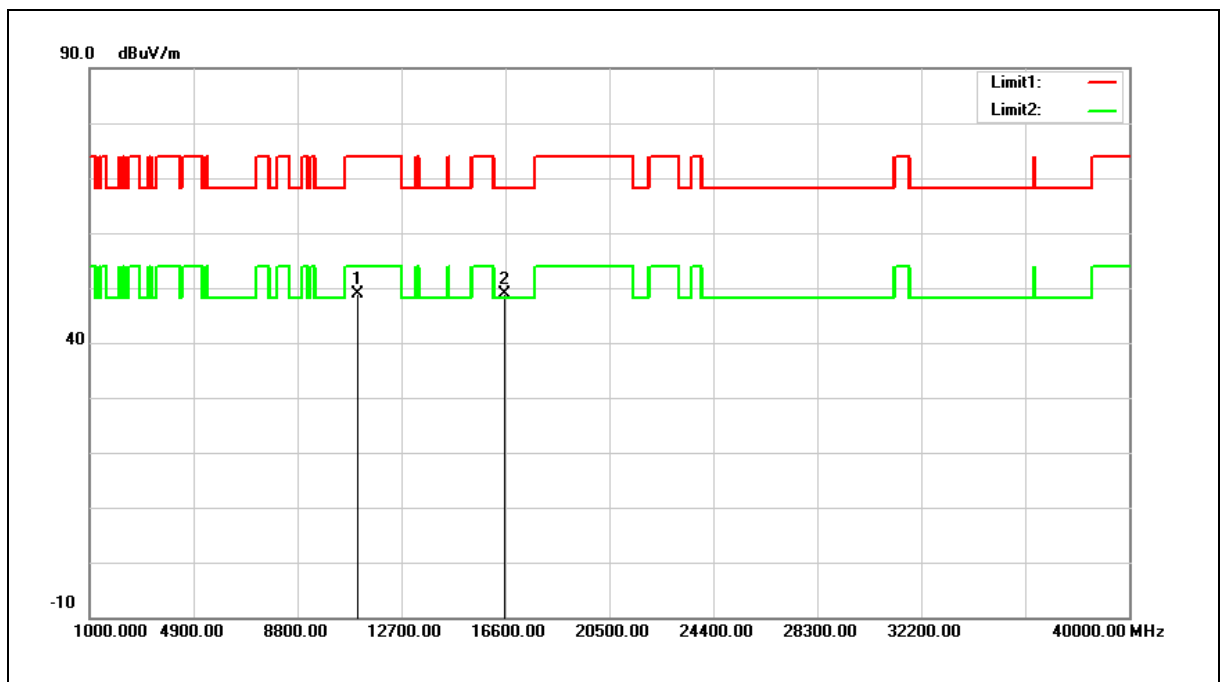


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	36.33	12.43	48.76	74.00	-25.24	peak
2	16590.000	34.07	14.73	48.80	68.20	-19.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

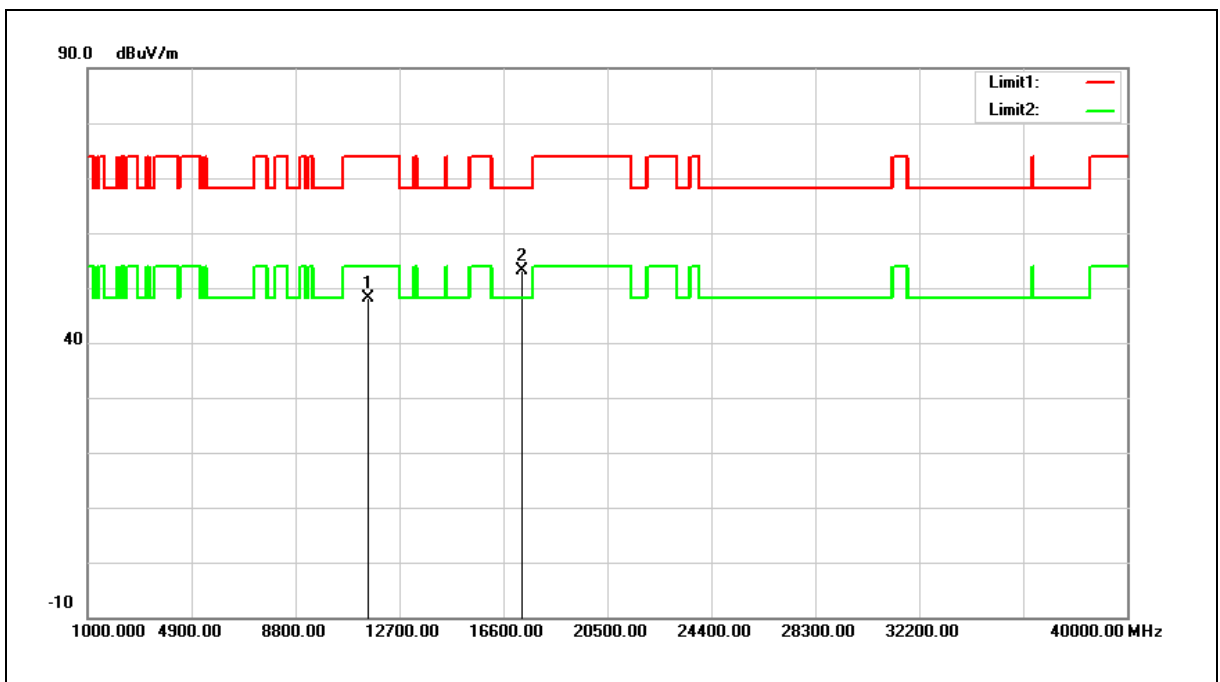


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	35.44	12.62	48.06	74.00	-25.94	peak
2	17325.000	34.10	19.12	53.22	68.20	-14.98	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

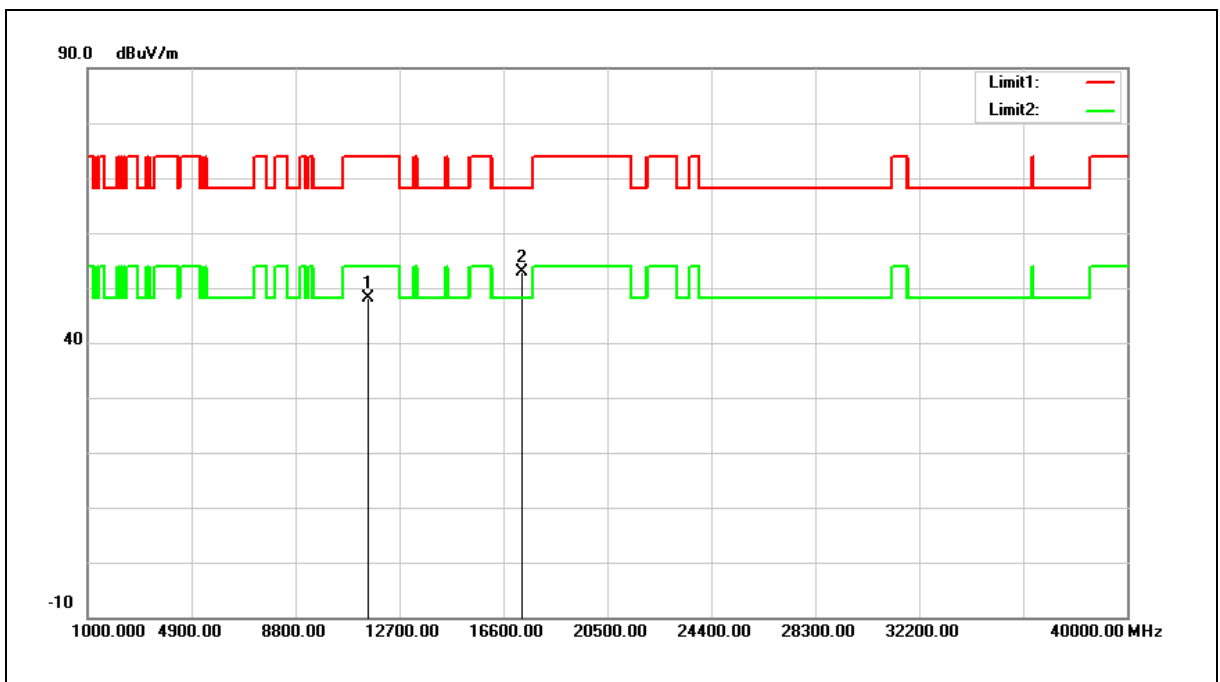


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	35.52	12.62	48.14	74.00	-25.86	peak
2	17325.000	33.81	19.12	52.93	68.20	-15.27	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5250 MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

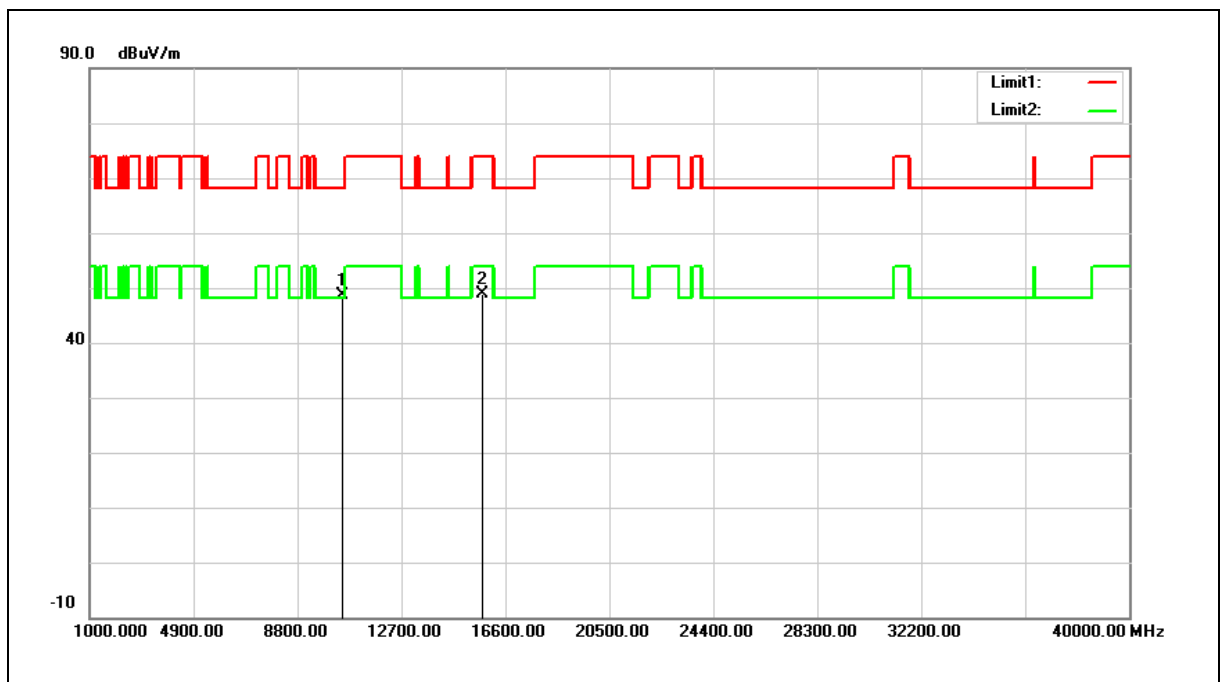


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10500.000	36.68	12.05	48.73	68.20	-19.47	peak
2	15750.000	34.90	14.08	48.98	74.00	-25.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5250 MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		

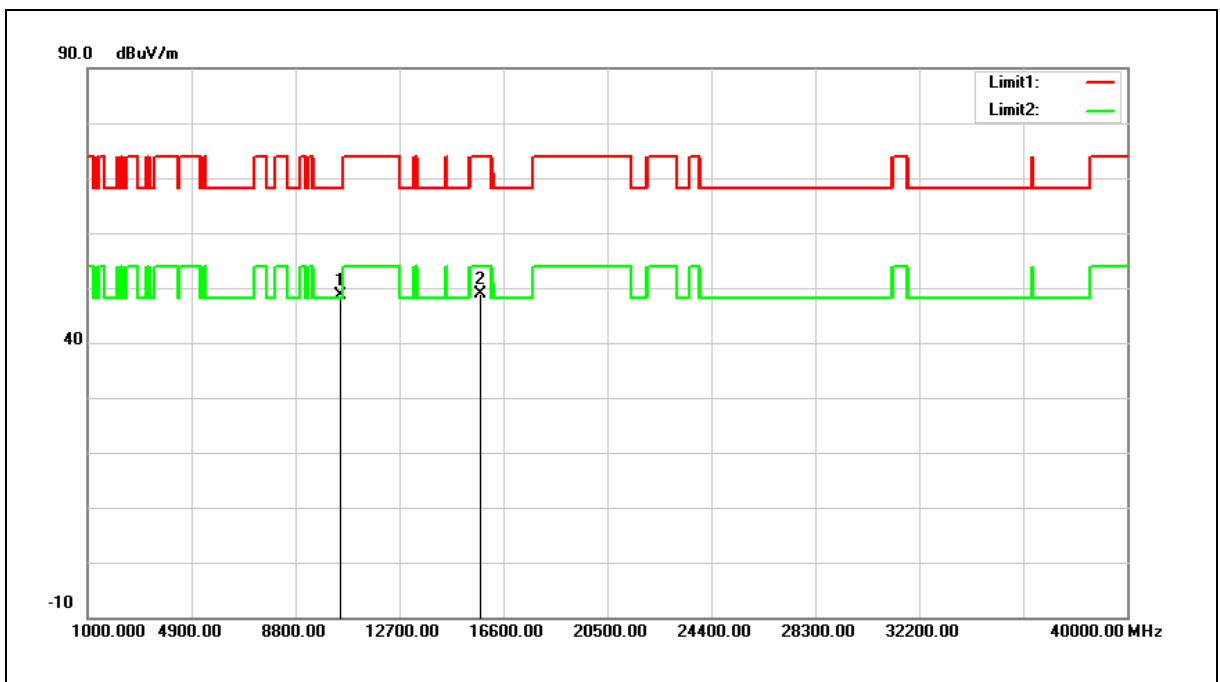


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10500.000	36.53	12.05	48.58	68.20	-19.62	peak
2	15750.000	34.78	14.08	48.86	74.00	-25.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting		
	(Bluetooth + WLAN 5 GHz)		
Ant.Polar.:	Horizontal		

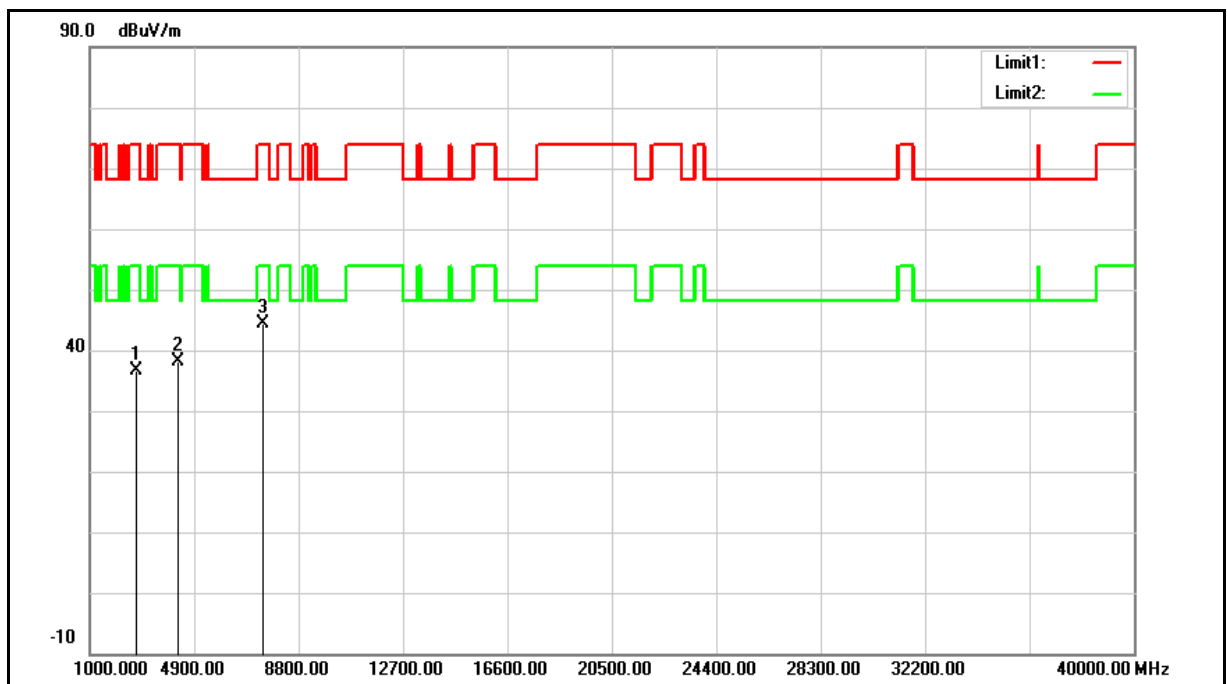


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2734.000	43.02	-6.31	36.71	74.00	-37.29	peak
2	4247.000	40.92	-2.82	38.10	74.00	-35.90	peak
3	7443.000	37.82	6.57	44.39	74.00	-29.61	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting		
	(Bluetooth + WLAN 5 GHz)		
Ant.Polar.:	Vertical		

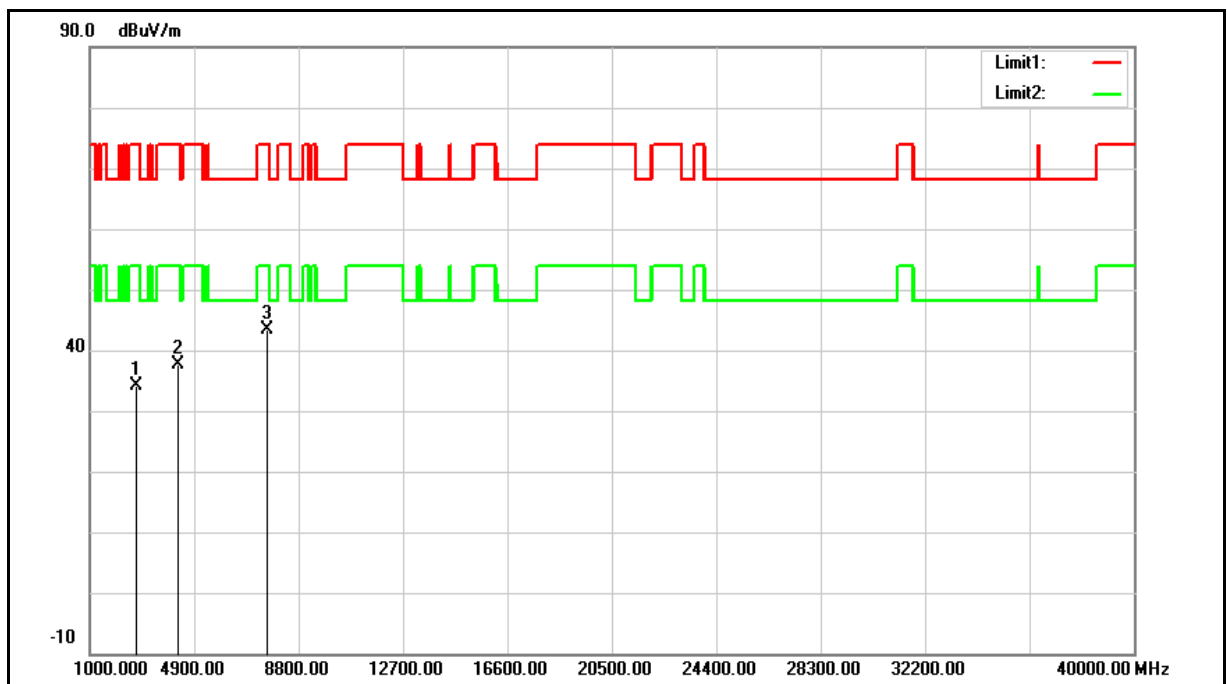


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2717.000	40.60	-6.39	34.21	74.00	-39.79	peak
2	4281.000	40.32	-2.74	37.58	74.00	-36.42	peak
3	7613.000	36.44	6.94	43.38	74.00	-30.62	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		
Description:			

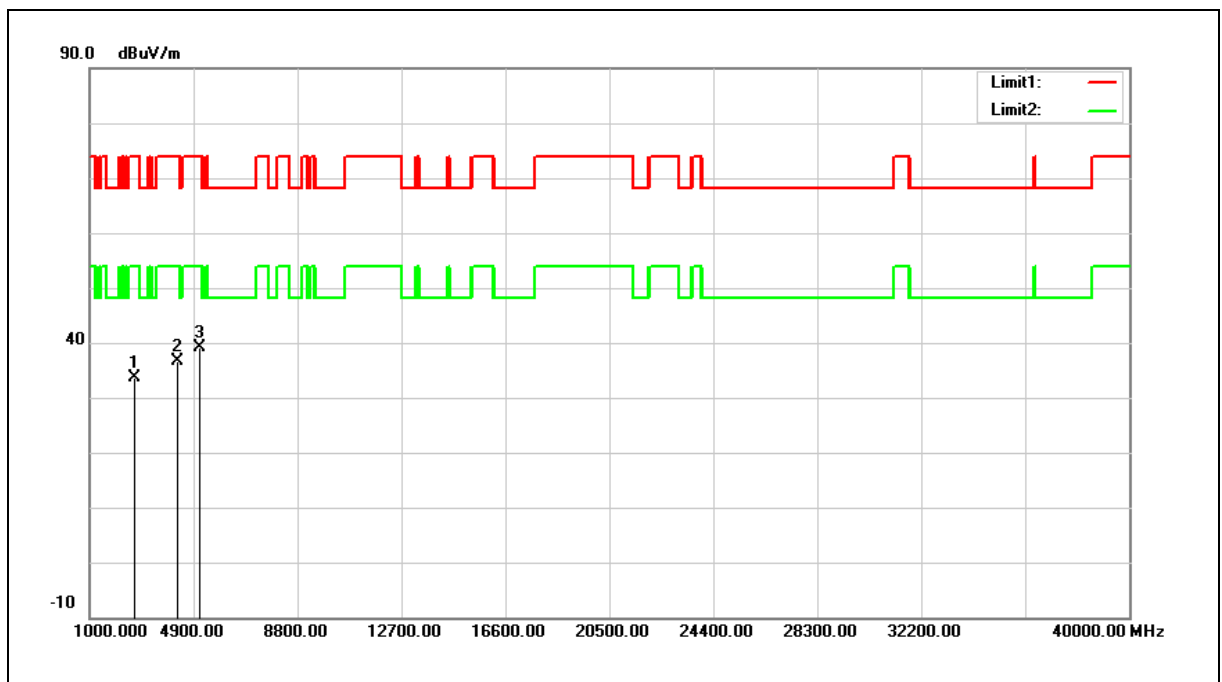


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2666.000	40.32	-6.60	33.72	74.00	-40.28	peak
2	4247.000	39.44	-2.82	36.62	74.00	-37.38	peak
3	5131.000	39.60	-0.52	39.08	74.00	-34.92	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 13		
Ant.Polar.:	Vertical		
Description:			

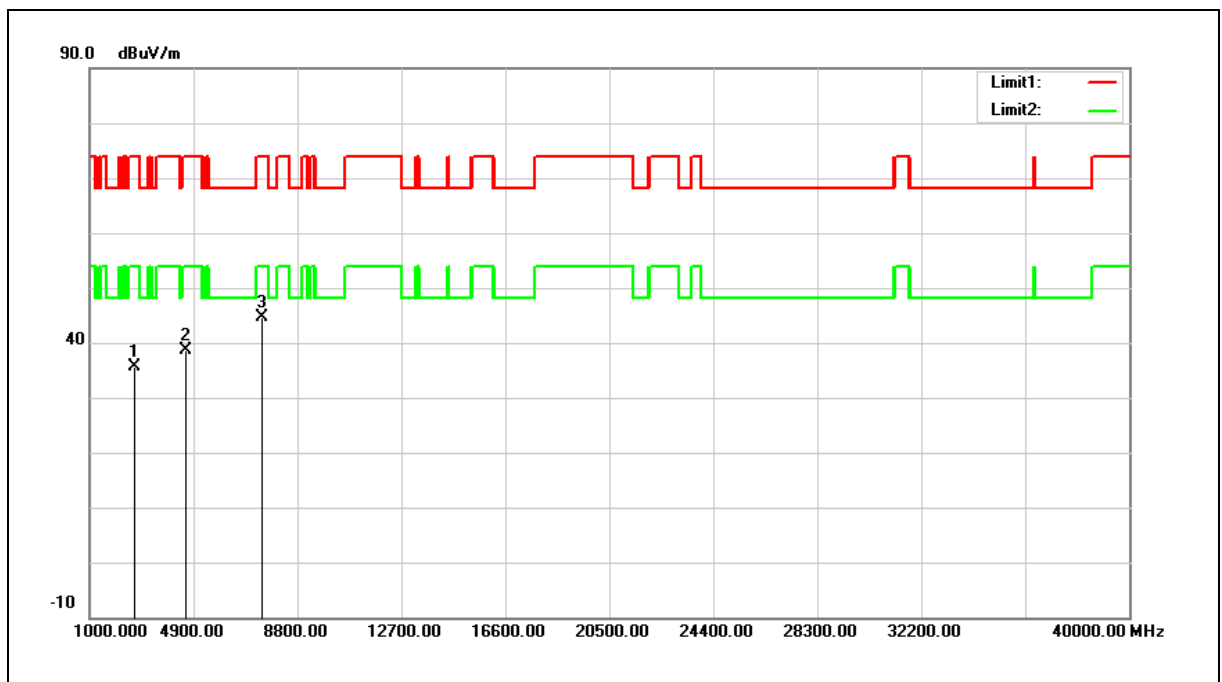

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2666.000	42.21	-6.60	35.61	74.00	-38.39	peak
2	4621.000	40.42	-1.81	38.61	74.00	-35.39	peak
3	7443.000	37.95	6.57	44.52	74.00	-29.48	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

頻帶邊緣

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

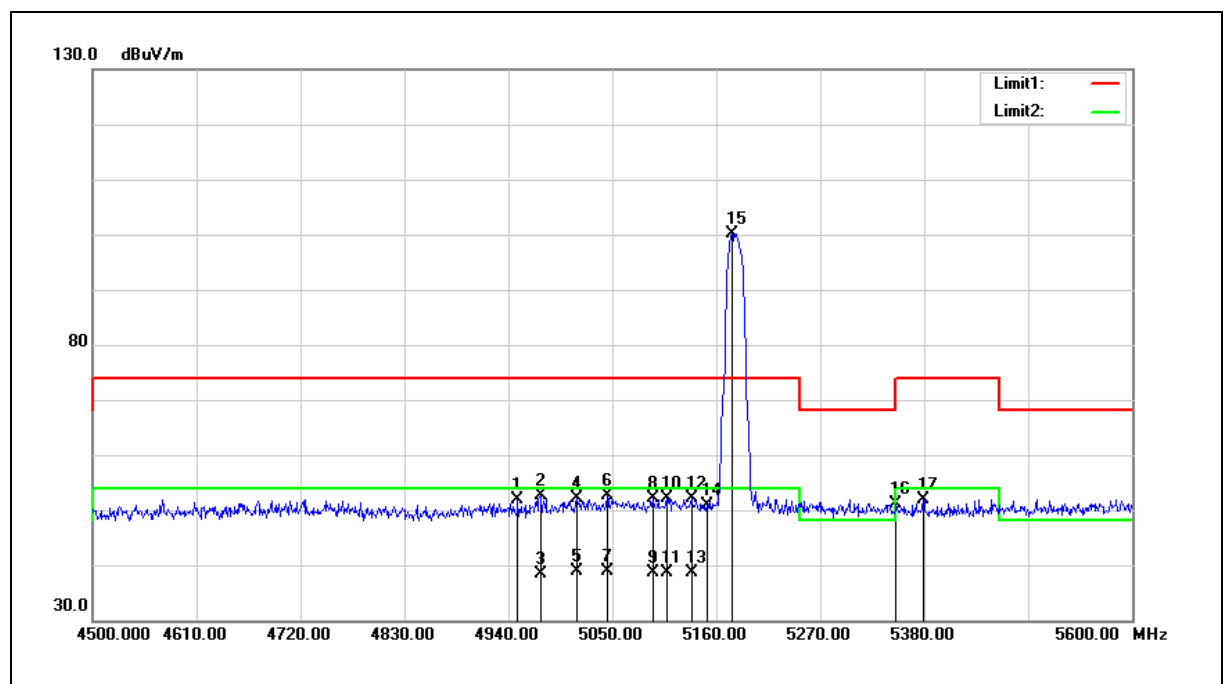

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4949.900	52.87	-0.90	51.97	74.00	-22.03	peak
2	4974.100	53.58	-0.84	52.74	74.00	-21.26	peak
3	4974.100	39.34	-0.84	38.50	54.00	-15.50	AVG
4	5012.600	52.84	-0.74	52.10	74.00	-21.90	peak
5	5012.600	39.73	-0.74	38.99	54.00	-15.01	AVG
6	5044.500	53.27	-0.68	52.59	74.00	-21.41	peak
7	5044.500	39.45	-0.68	38.77	54.00	-15.23	AVG
8	5092.900	52.82	-0.60	52.22	74.00	-21.78	peak
9	5092.900	39.13	-0.60	38.53	54.00	-15.47	AVG
10	5107.200	52.77	-0.56	52.21	74.00	-21.79	peak
11	5107.200	39.16	-0.56	38.60	54.00	-15.40	AVG
12	5133.600	52.60	-0.51	52.09	74.00	-21.91	peak
13	5133.600	39.13	-0.51	38.62	54.00	-15.38	AVG
14	5150.000	51.33	-0.48	50.85	74.00	-23.15	peak
15	5176.500	100.62	-0.43	100.19	--	--	peak
16	5350.000	51.16	-0.08	51.08	74.00	-22.92	peak
17	5378.900	51.82	-0.03	51.79	74.00	-22.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.