


802.11ax-HE80 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)


Channel 42 (5210MHz)




Channel 58 (5290MHz)

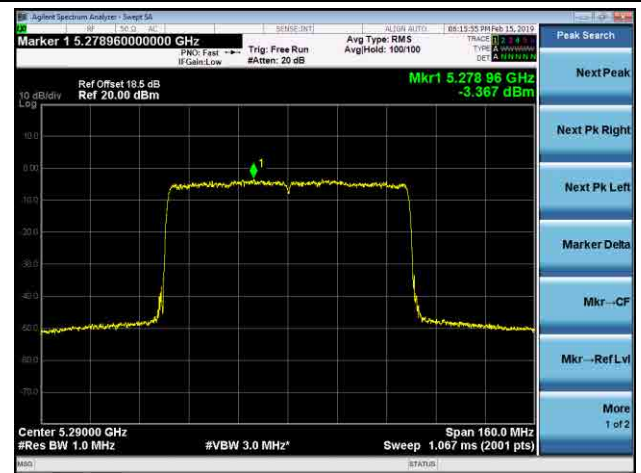


Channel 106 (5530MHz)

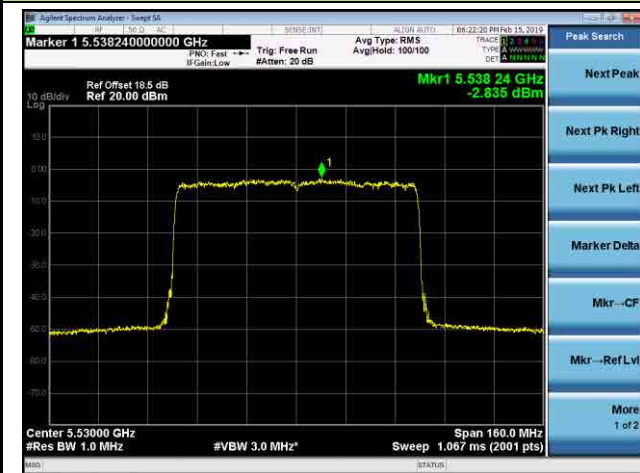

Channel 122 (5610MHz)

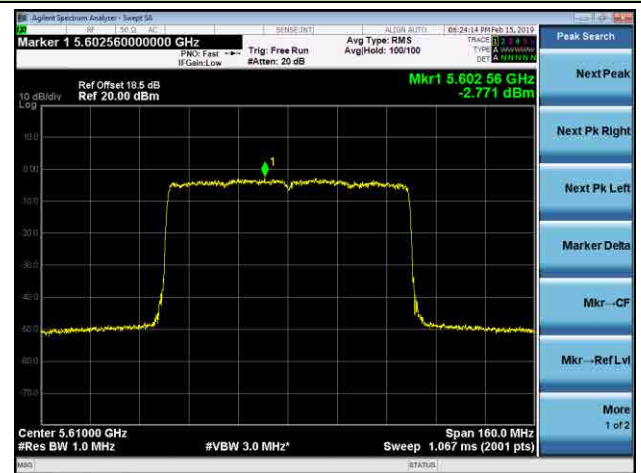


Channel 155 (5775MHz)

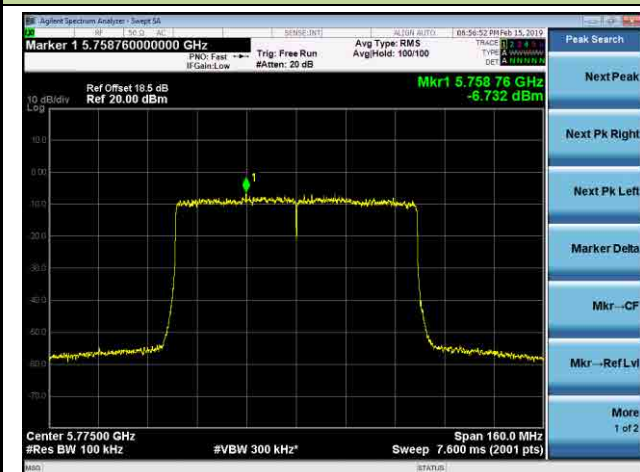

802.11ax-HE160 Power Spectral Density - Ant 3 / Ant 0 + 1 + 2 + 3 (Beam-Forming Mode)

Channel 50 (5250MHz)

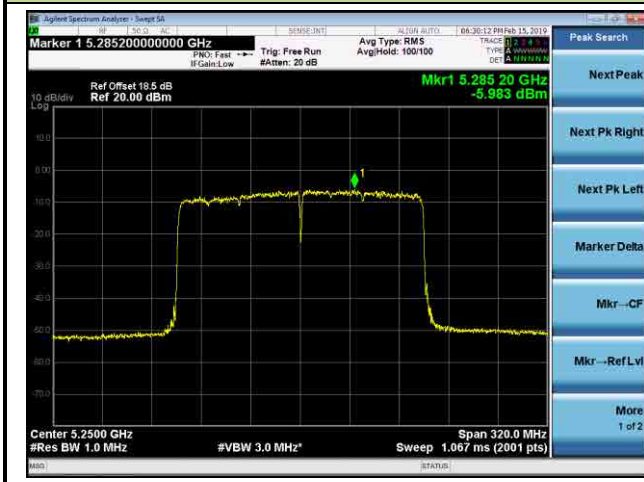

Channel 114 (5570MHz)




5.7. 操作頻帶外的峰值發射

5.7.1. 適用標準

依據國家通訊傳播委員會低功率射頻電機技術規範之第 4.7.3 節：

(1) 在 5.15 GHz~5.35 GHz 及 5.470 GHz~5.725 GHz 頻段操作的發射器：帶外發射之有效等向輻射功率(EIRP) $\leq$ -27 dBm/MHz。

(2) 在 5.725 GHz~5.850 GHz 的頻段操作之發射器：所有頻帶邊緣向外 5 MHz 內頻率之發射，有效等向輻射功率(EIRP) $\leq$ 27 dBm/MHz~15.6 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣向外 5 MHz~25 MHz，有效等向輻射功率(EIRP) $\leq$ 15.6 dBm/MHz~10 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣外 25 MHz~75 MHz，有效等向輻射功率(EIRP) $\leq$ 10 dBm/MHz~-27 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣外 $\geq$ 75 MHz 的頻率之發射，有效等向輻射功率(EIRP) $\leq$ -27 dBm/MHz；

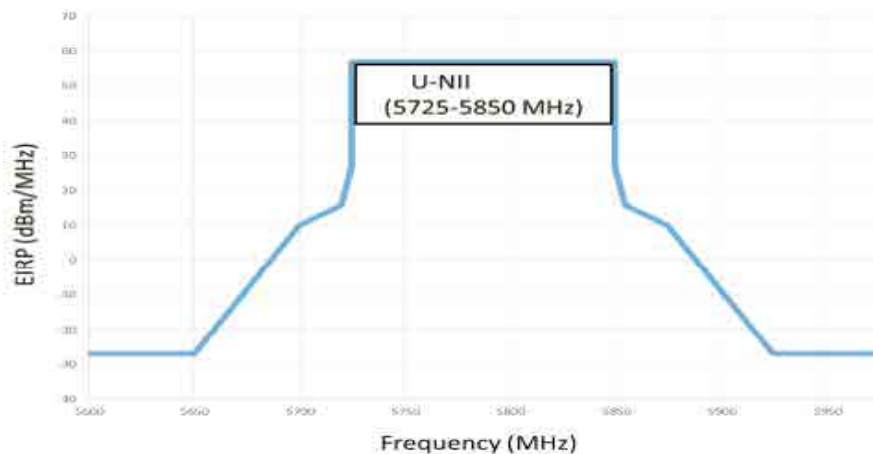


5.7.2. 量測方法

高頻待測物置於高 150 公分之非導體桌面，受測物與配件設備之電源線無須束綁，桌面上受測設備的所有電源線由桌子的後緣垂下沿旋轉桌表面接至交流插座。落地型設備的交流電源線可以方便的型態走線。桌面可 360 度旋轉，接收天線置於距待測物 3m 距離，高度可在 1 至 4 公尺間變動，以量測待測物之最大輻射電場強度。接收天線並應於水準及垂直極化方向各量測一次。


5.7.3. 測試架構圖

1GHz ~ 18GHz Test Setup

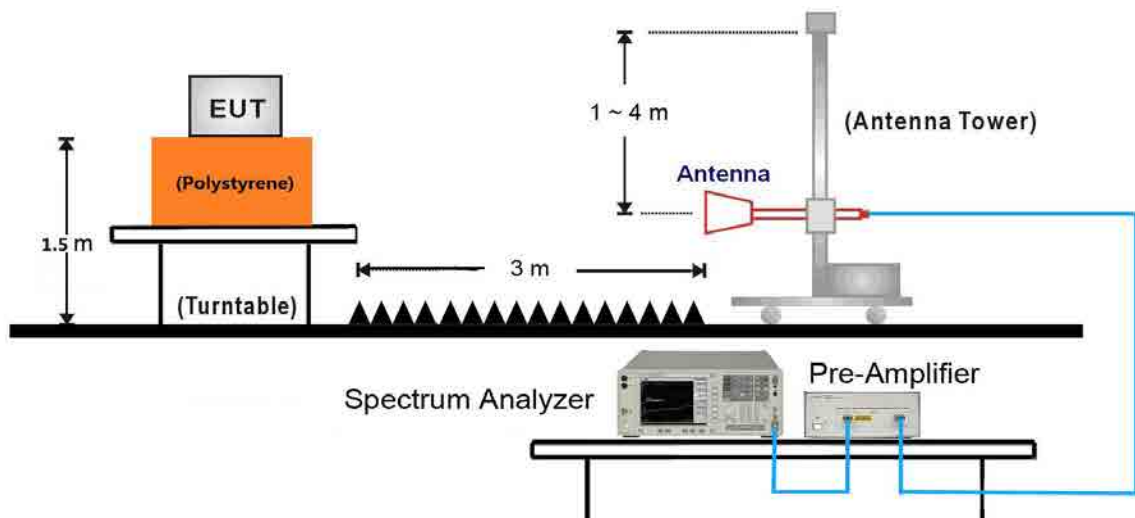

5.7.4. 操作頻帶外的峰值發射測試結果

Site: AC1	Time: 2019/01/30 - 11:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11a at Channel 5180MHz (CDD Mode)	

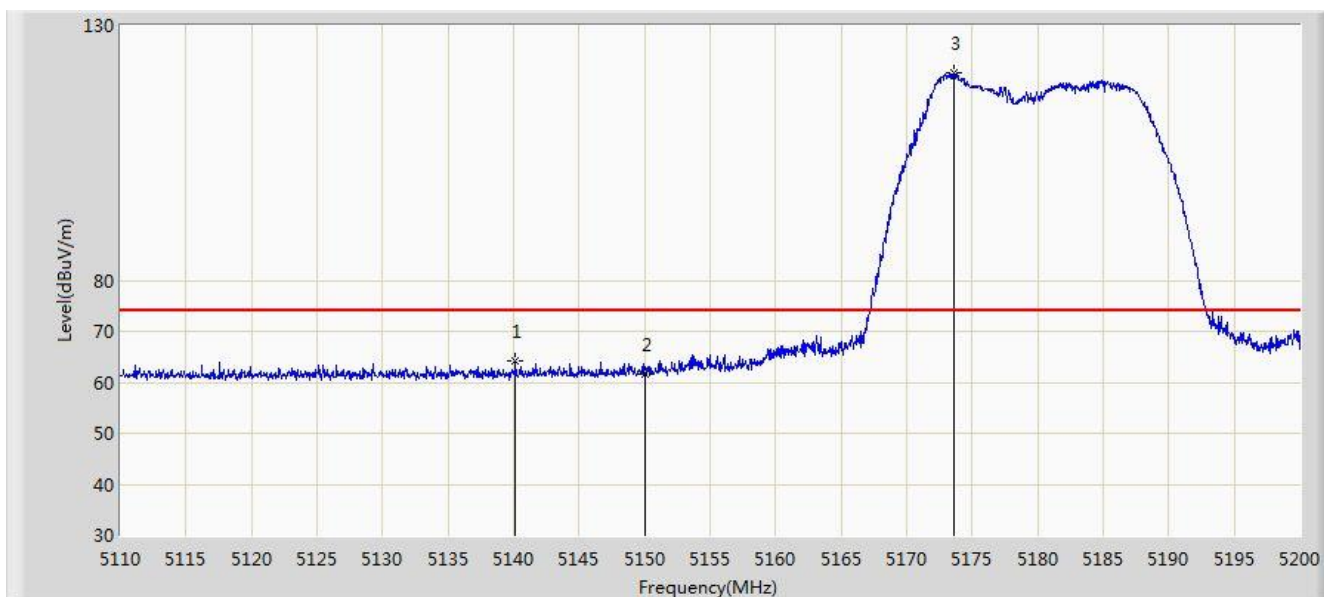


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5140.150	64.070	59.895	-9.930	74.000	4.175	PK
2			5150.000	61.612	57.443	-12.388	74.000	4.170	PK
3		*	5173.630	120.619	116.528	N/A	N/A	4.092	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 11:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11a at Channel 5180MHz (CDD Mode)	

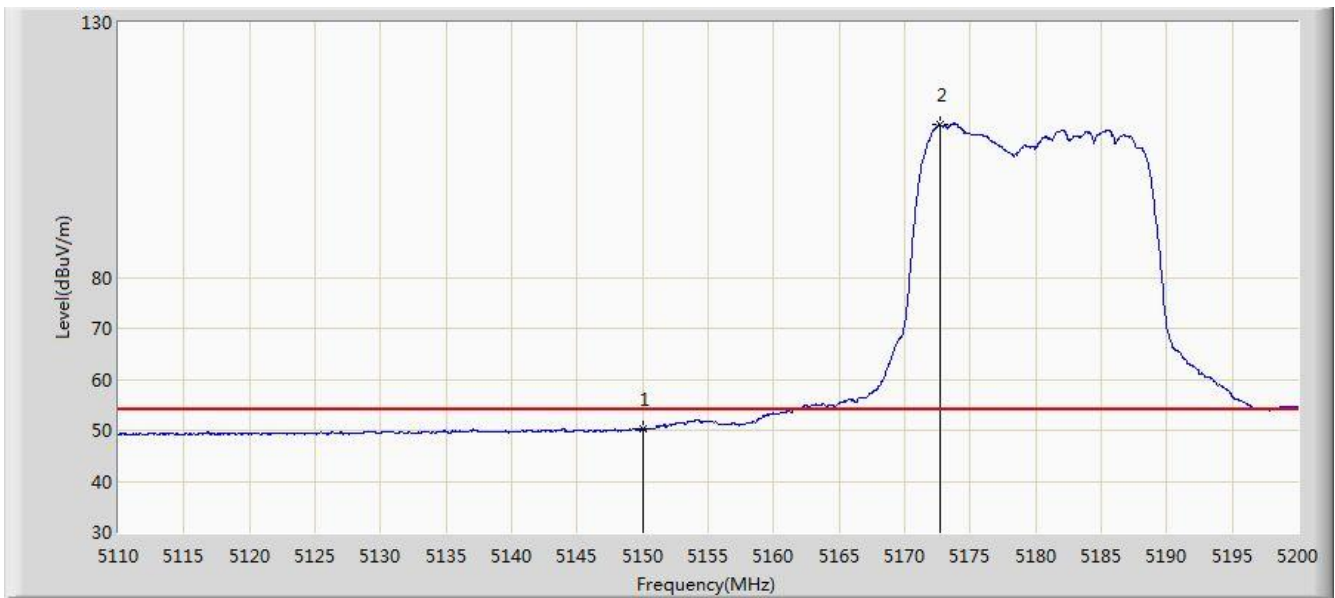


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.369	46.200	-3.631	54.000	4.170	AV
2	X	*	5172.685	109.976	105.881	N/A	N/A	4.095	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 11:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11a at Channel 5180MHz (CDD Mode)	

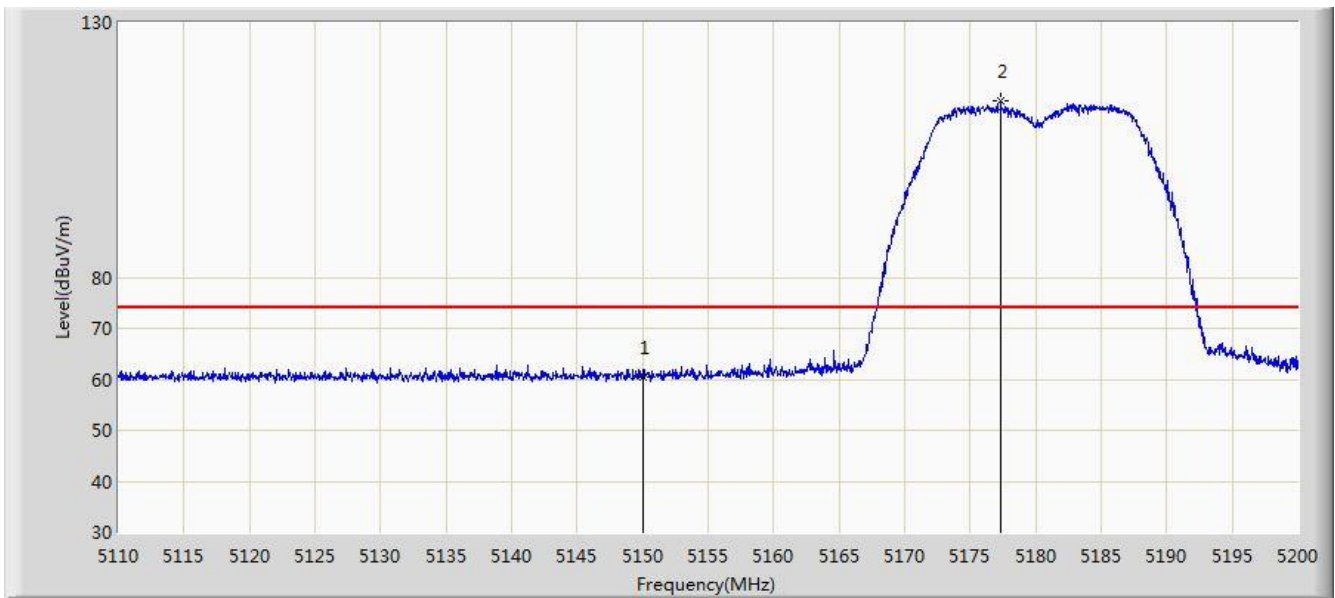


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	60.412	56.243	-13.588	74.000	4.170	PK
2		*	5177.320	114.569	110.491	N/A	N/A	4.078	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 11:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11a at Channel 5180MHz (CDD Mode)	

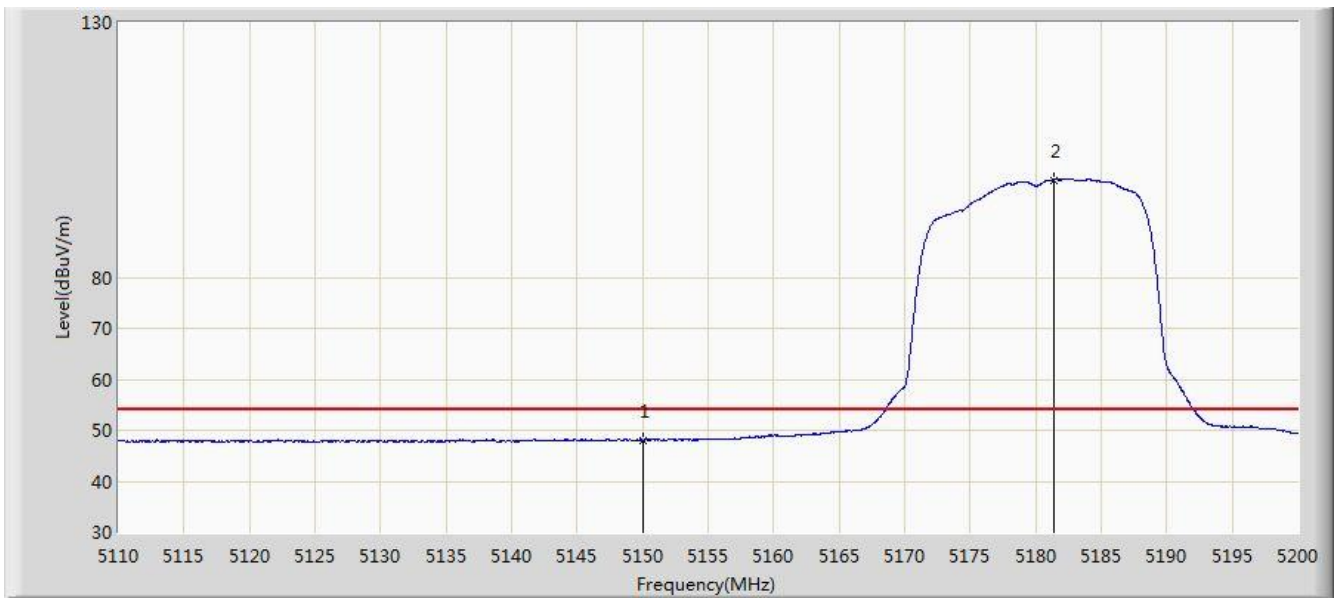


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.073	43.904	-5.927	54.000	4.170	AV
2		*	5181.370	99.130	95.066	N/A	N/A	4.064	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 11:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11a at Channel 5320MHz (CDD Mode)	

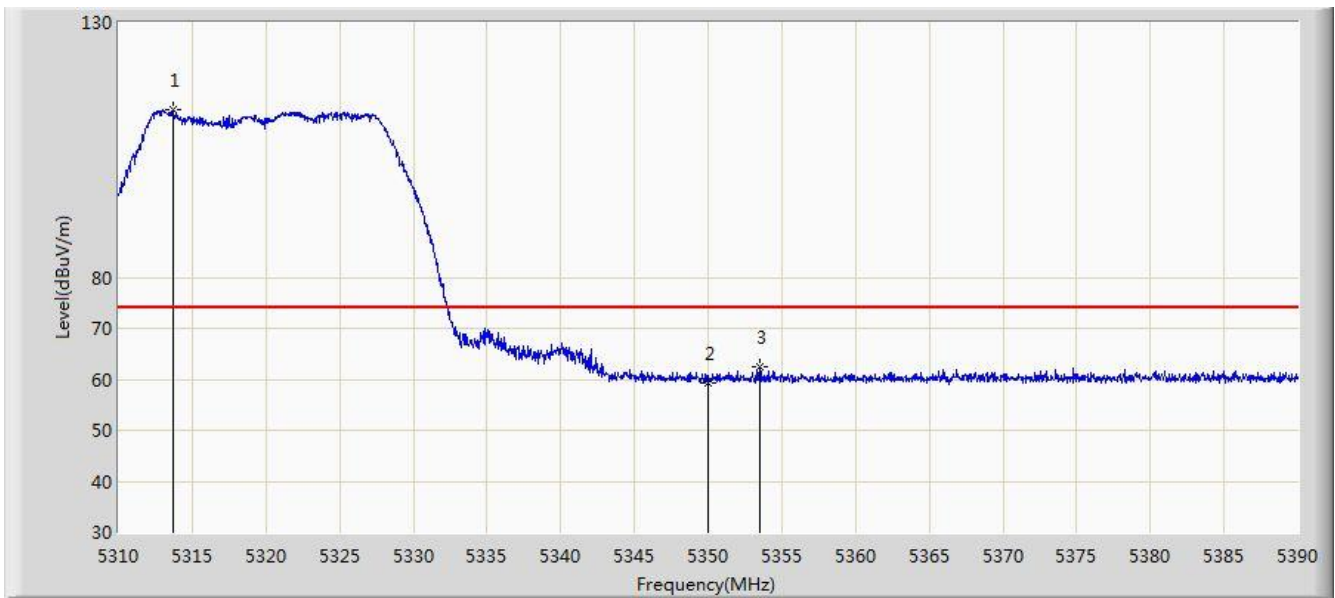


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.680	112.791	108.954	N/A	N/A	3.836	PK
2			5350.000	59.323	55.418	-14.677	74.000	3.904	PK
3			5353.480	62.329	58.418	-11.671	74.000	3.911	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 11:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11a at Channel 5320MHz (CDD Mode)	

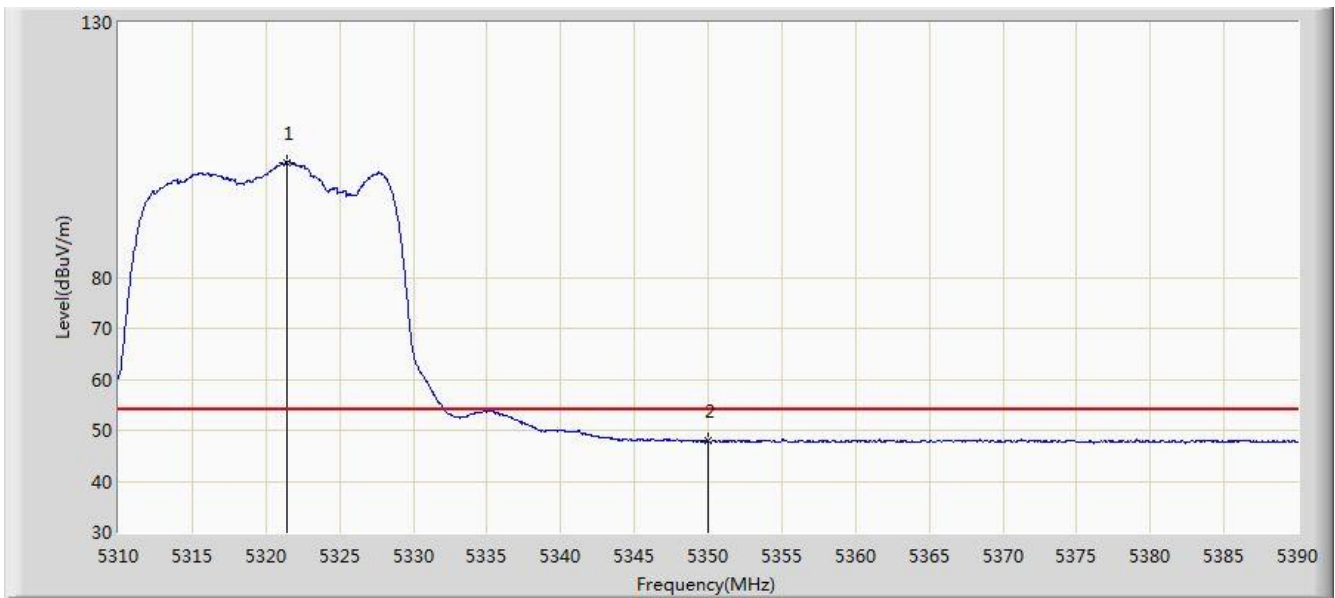


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.400	102.547	98.696	N/A	N/A	3.851	AV
2			5350.000	47.941	44.036	-6.059	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 11:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
Test Mode: Transmit by 802.11a at Channel 5320MHz (CDD Mode)	

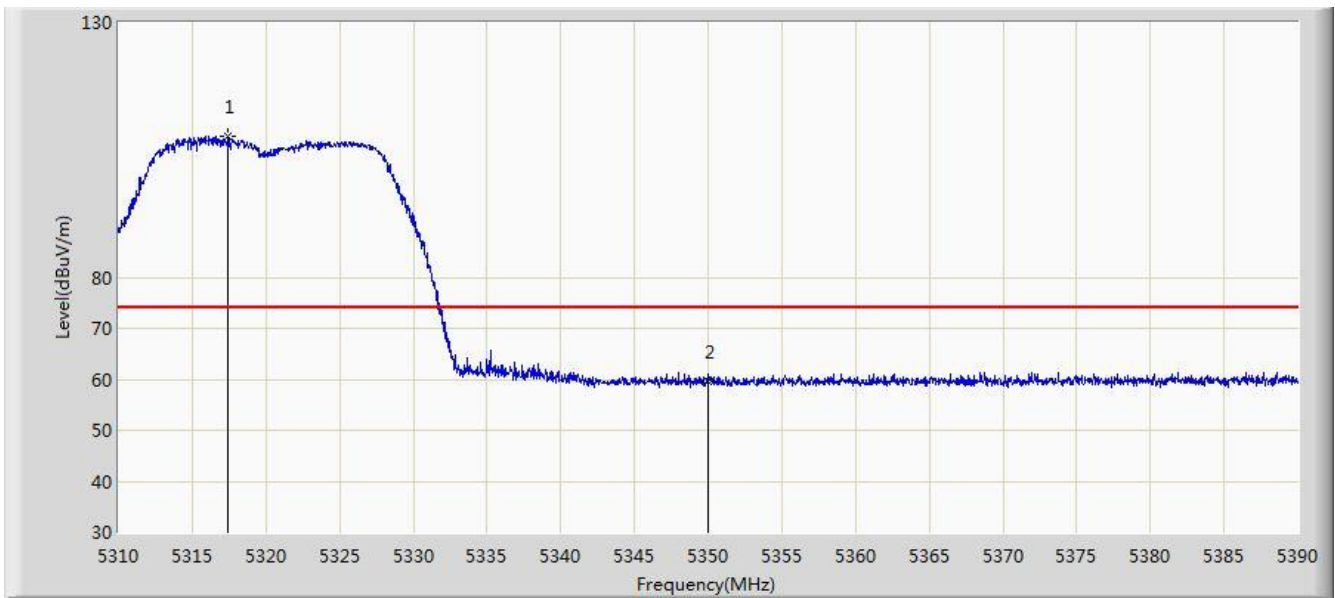


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.440	107.822	103.978	N/A	N/A	3.844	PK
2			5350.000	59.663	55.758	-14.337	74.000	3.904	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 11:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11a at Channel 5320MHz (CDD Mode)	

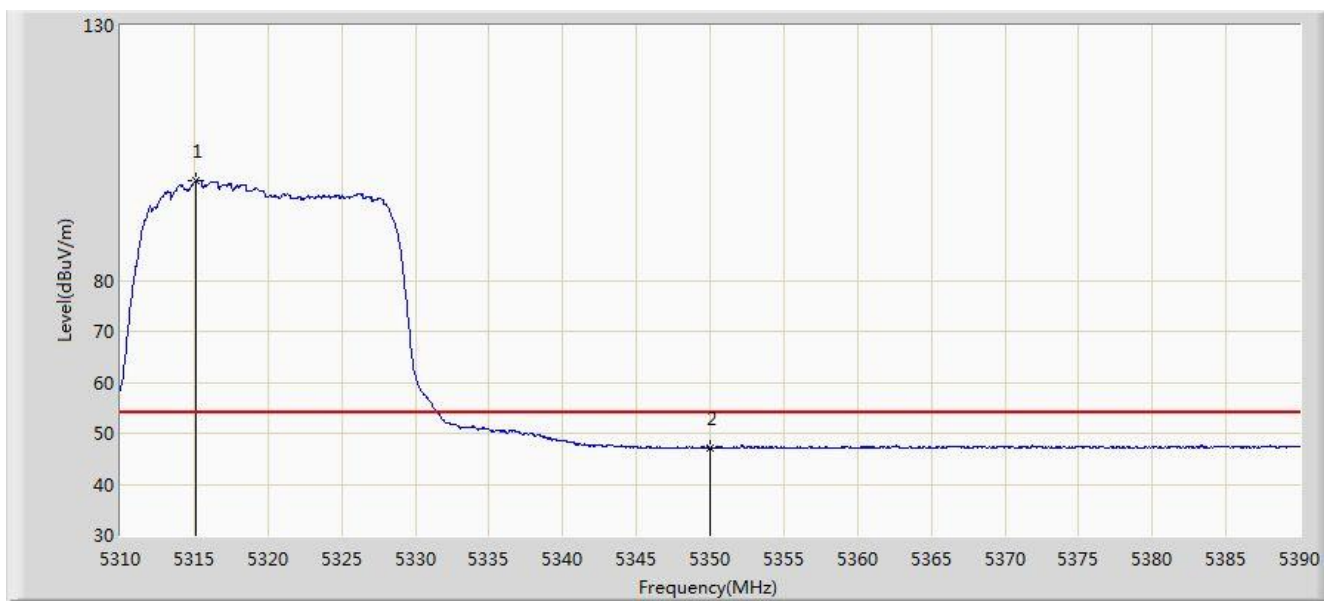


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.080	99.427	95.588	N/A	N/A	3.840	AV
2			5350.000	47.174	43.269	-6.826	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 19:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11a at Channel 5500MHz (CDD Mode)	

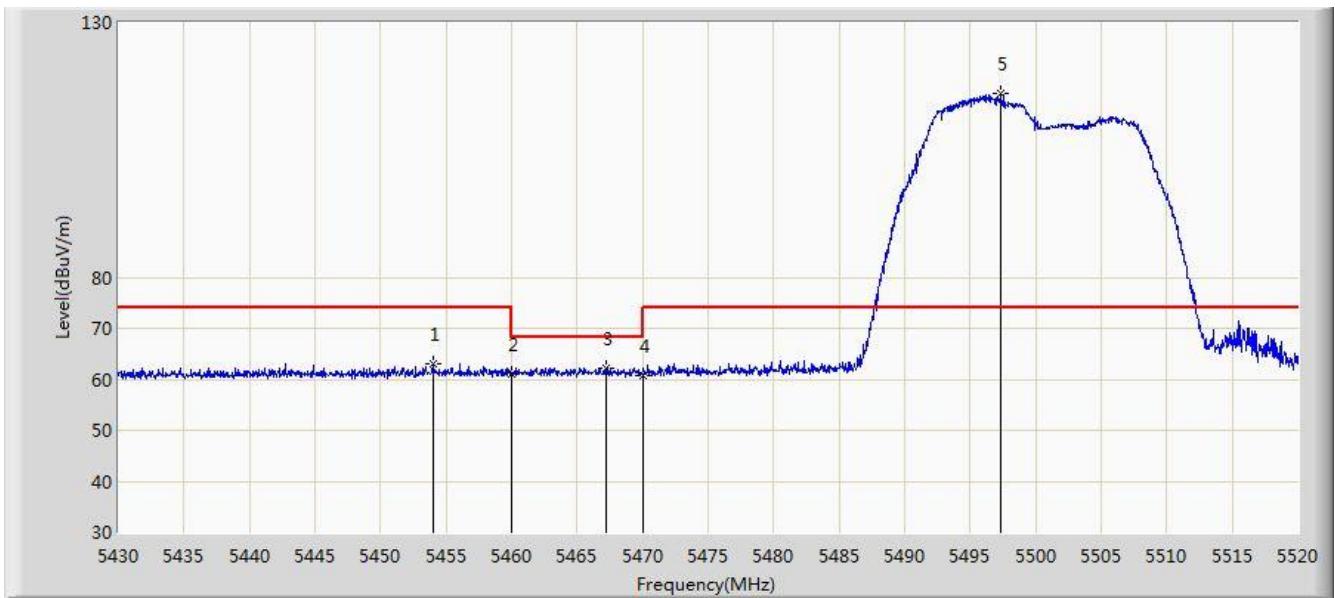


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.985	63.083	58.915	-10.917	74.000	4.168	PK
2			5460.000	61.103	56.923	-12.897	74.000	4.180	PK
3			5467.170	62.237	58.041	-5.963	68.200	4.196	PK
4			5470.000	60.795	56.593	-7.405	68.200	4.202	PK
5		*	5497.320	116.167	111.903	N/A	N/A	4.264	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 19:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11a at Channel 5500MHz (CDD Mode)	

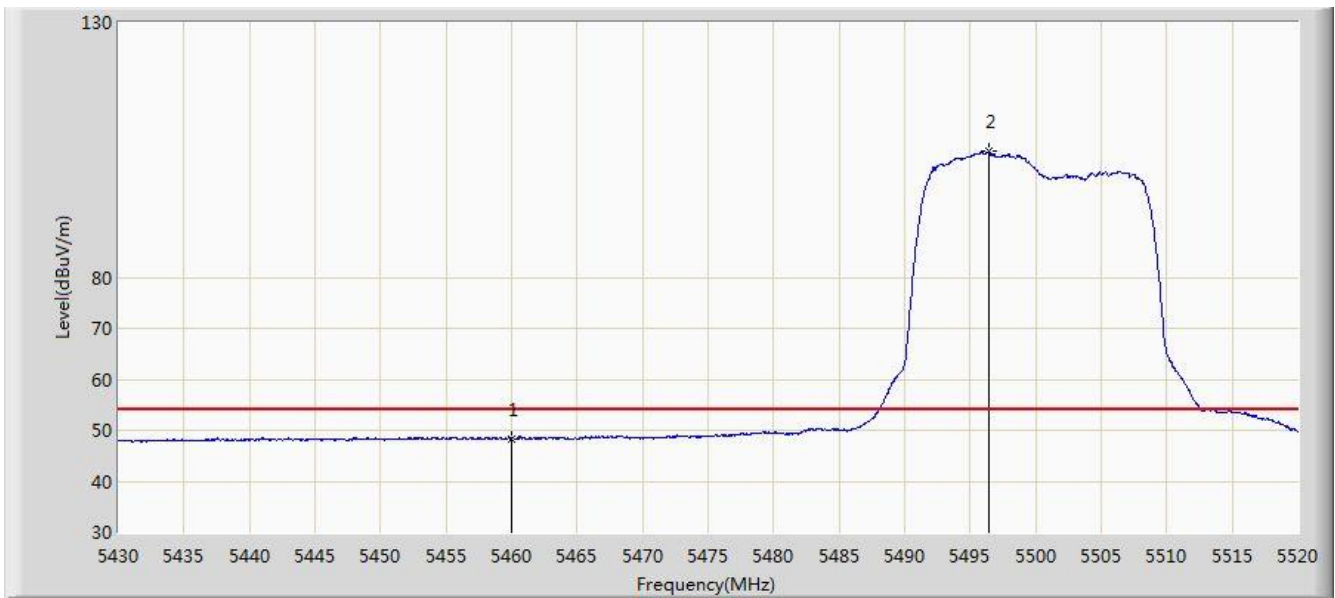


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.396	44.216	-5.604	54.000	4.180	AV
2		*	5496.420	104.715	100.453	N/A	N/A	4.262	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 19:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11a at Channel 5500MHz (CDD Mode)	

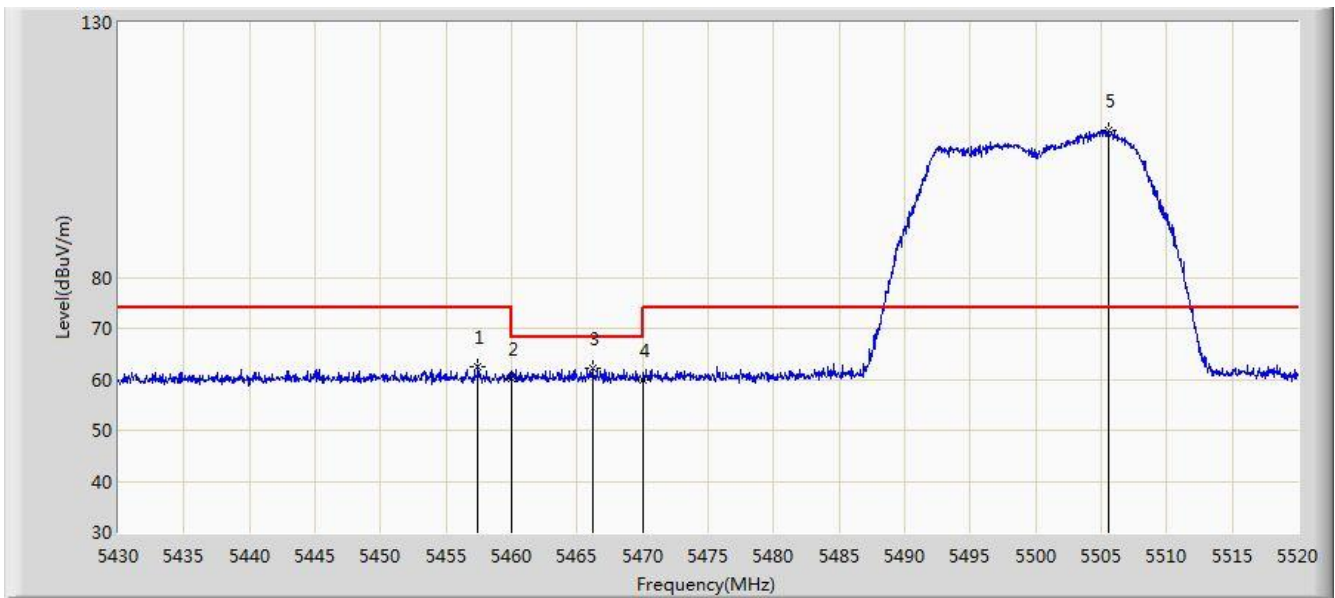


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.450	62.605	58.430	-11.395	74.000	4.175	PK
2			5460.000	60.273	56.093	-13.727	74.000	4.180	PK
3			5466.180	62.196	58.002	-6.004	68.200	4.193	PK
4			5470.000	59.721	55.519	-8.479	68.200	4.202	PK
5		*	5505.555	108.824	104.536	N/A	N/A	4.289	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 19:32
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11a at Channel 5500MHz (CDD Mode)	

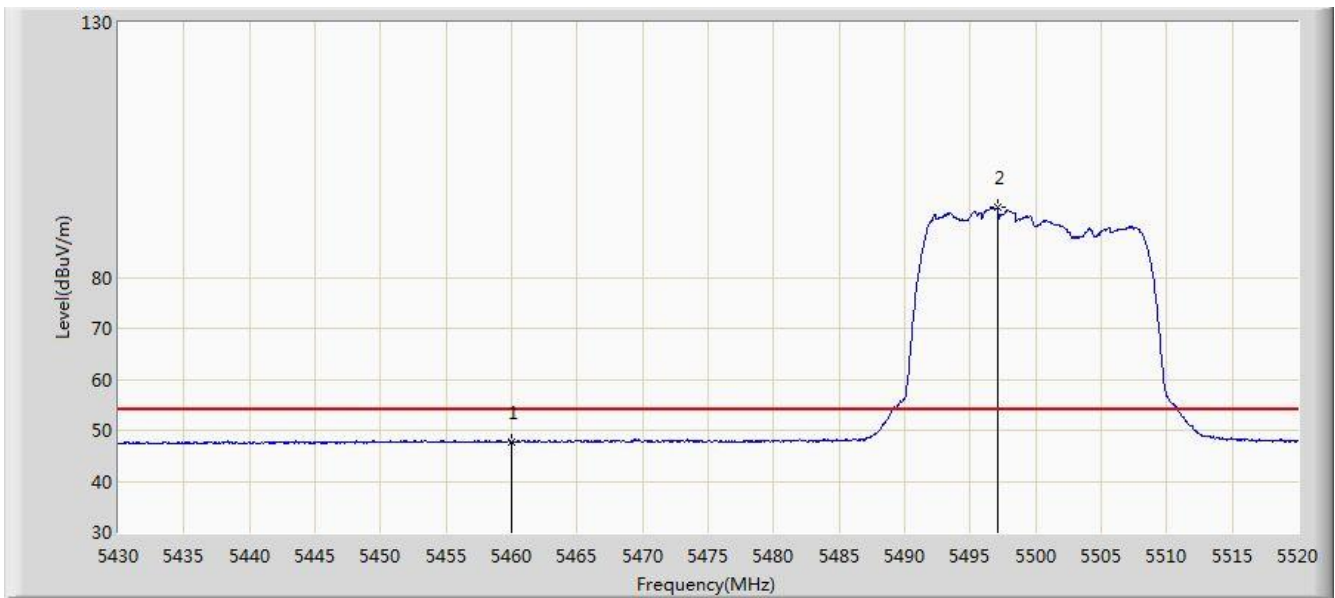


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.776	43.596	-6.224	54.000	4.180	AV
2		*	5497.140	93.872	89.608	N/A	N/A	4.264	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 19:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11a at Channel 5700MHz (CDD Mode)	

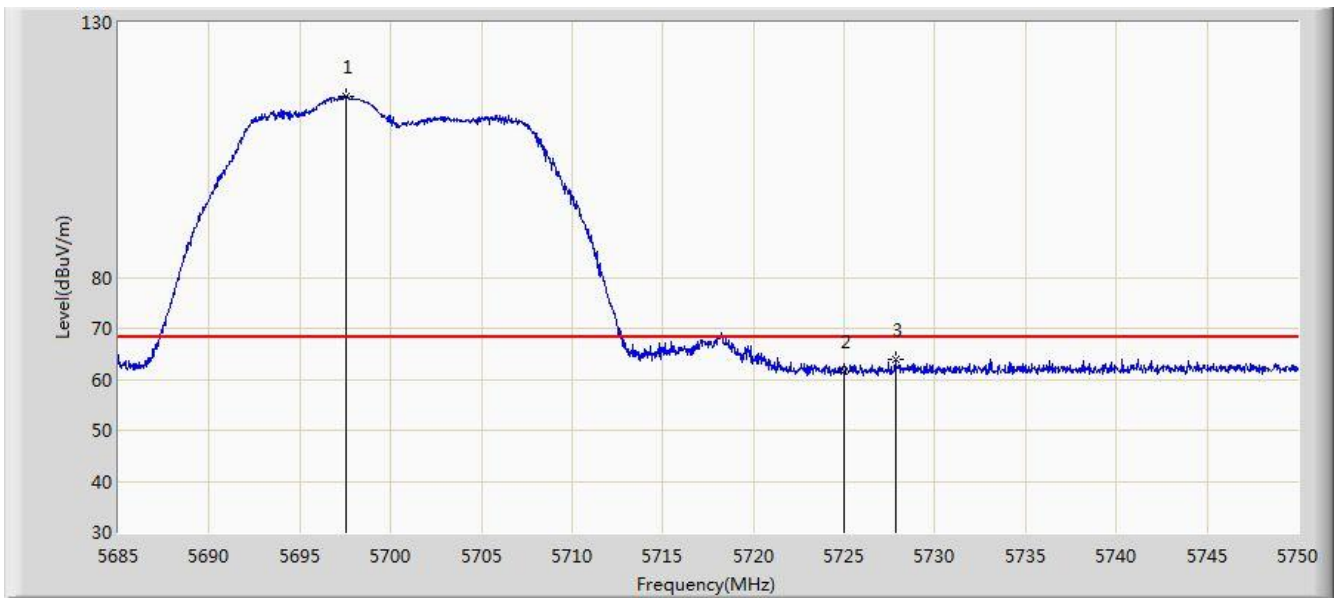


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.513	115.597	110.732	N/A	N/A	4.865	PK
2			5725.000	61.462	56.433	-6.738	68.200	5.029	PK
3			5727.835	63.824	58.777	-4.376	68.200	5.047	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 19:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11a at Channel 5700MHz (CDD Mode)	

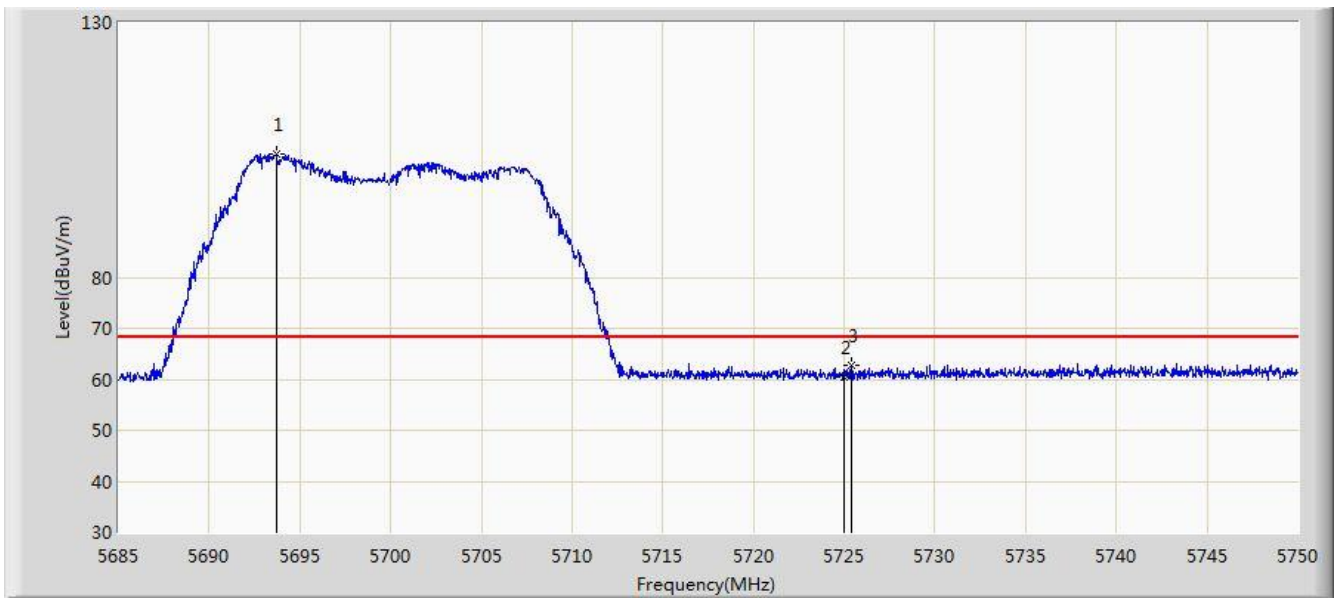


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5693.678	104.109	99.264	N/A	N/A	4.845	PK
2			5725.000	60.487	55.458	-7.713	68.200	5.029	PK
3			5725.365	62.687	57.656	-5.513	68.200	5.032	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 19:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11a at Channel 5745MHz (CDD Mode)	

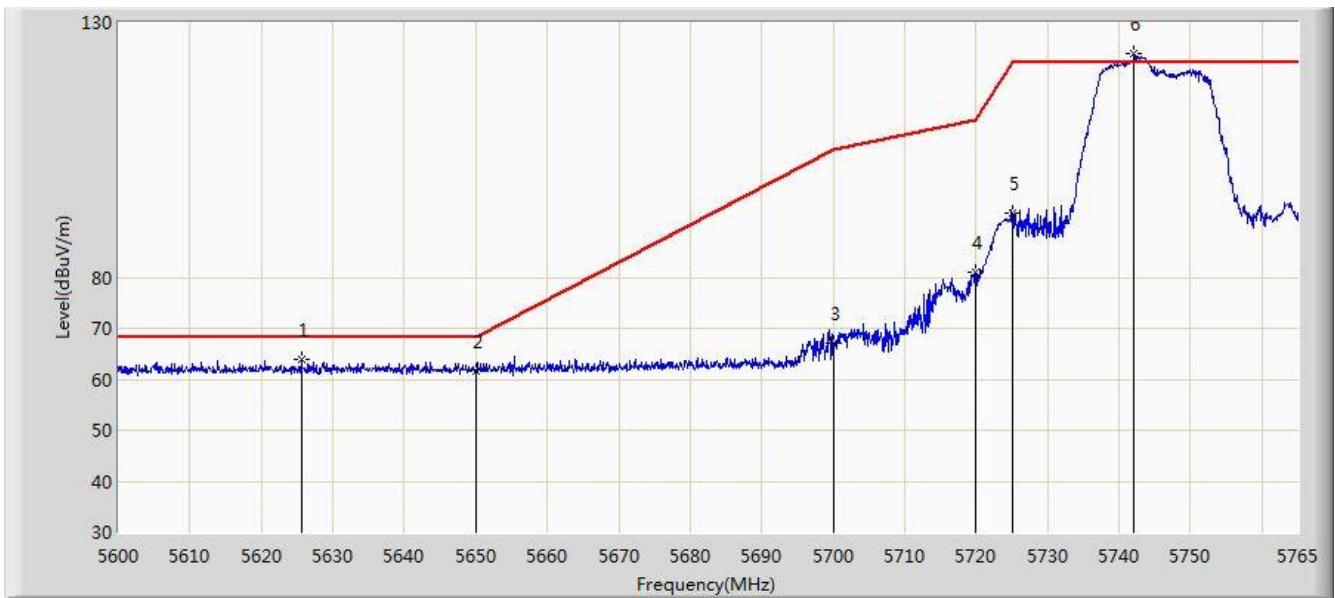


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5625.575	63.776	59.180	-4.424	68.200	4.597	PK
2			5650.000	61.528	56.857	-6.672	68.200	4.671	PK
3			5700.000	67.009	62.131	-38.191	105.200	4.878	PK
4			5720.000	80.965	75.968	-29.835	110.800	4.997	PK
5			5725.000	92.500	87.471	-29.700	122.200	5.029	PK
6		*	5742.147	123.832	118.694	N/A	N/A	5.138	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 19:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11a at Channel 5745MHz (CDD Mode)	

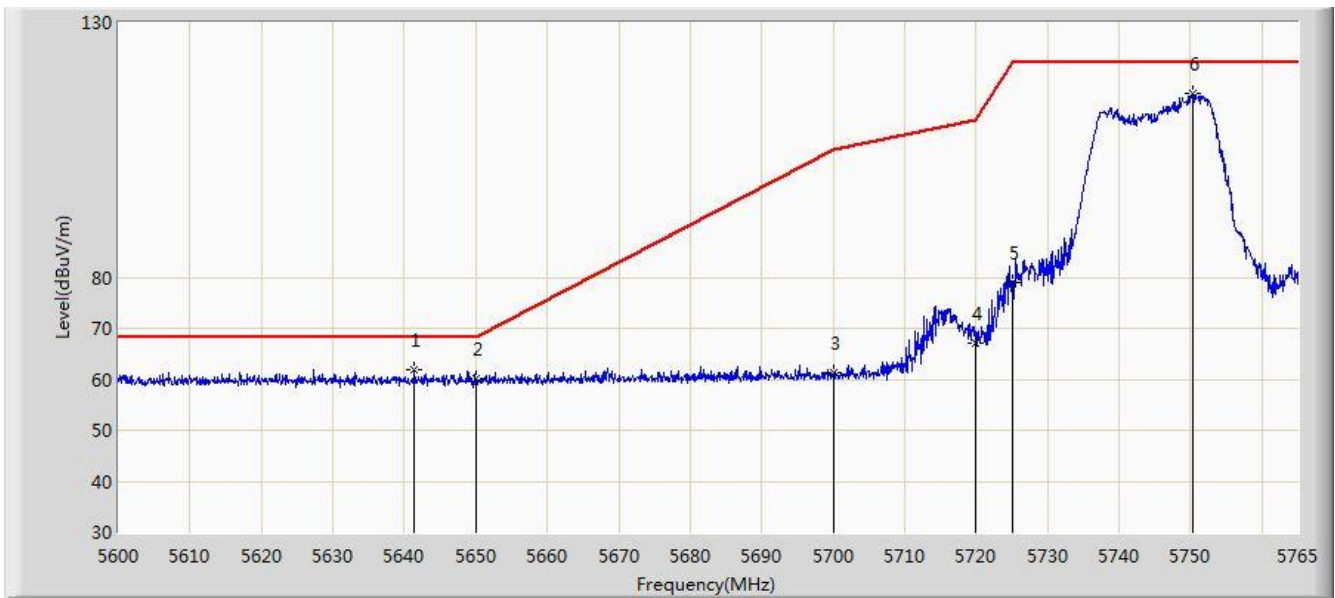


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5641.333	61.742	57.100	-6.458	68.200	4.642	PK
2			5650.000	60.065	55.394	-8.135	68.200	4.671	PK
3			5700.000	61.207	56.329	-43.993	105.200	4.878	PK
4			5720.000	67.131	62.134	-43.669	110.800	4.997	PK
5			5725.000	79.040	74.011	-43.160	122.200	5.029	PK
6		*	5750.397	116.006	110.820	N/A	N/A	5.186	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 19:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11a at Channel 5825MHz (CDD Mode)	

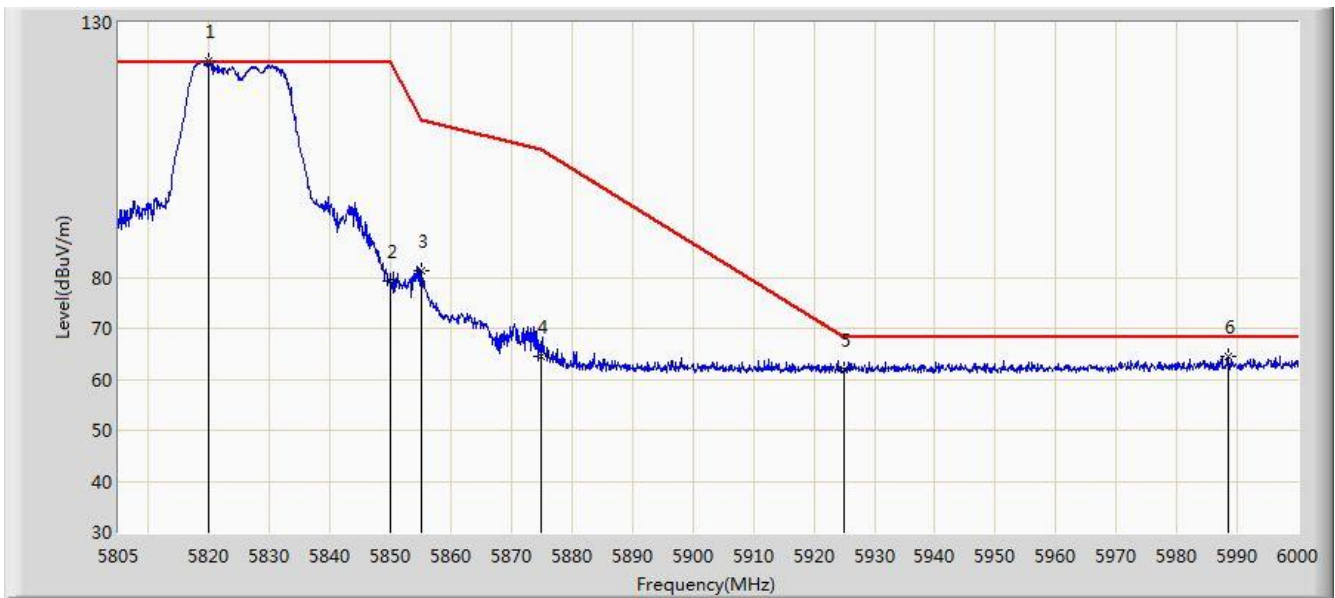


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5820.015	122.424	116.865	N/A	N/A	5.559	PK
2			5850.000	79.171	73.445	-43.029	122.200	5.726	PK
3			5855.000	81.200	75.454	-29.600	110.800	5.746	PK
4			5875.000	64.637	58.817	-40.563	105.200	5.820	PK
5			5925.000	61.988	56.022	-6.212	68.200	5.967	PK
6			5988.397	64.449	58.358	-3.751	68.200	6.091	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 20:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11a at Channel 5825MHz (CDD Mode)	

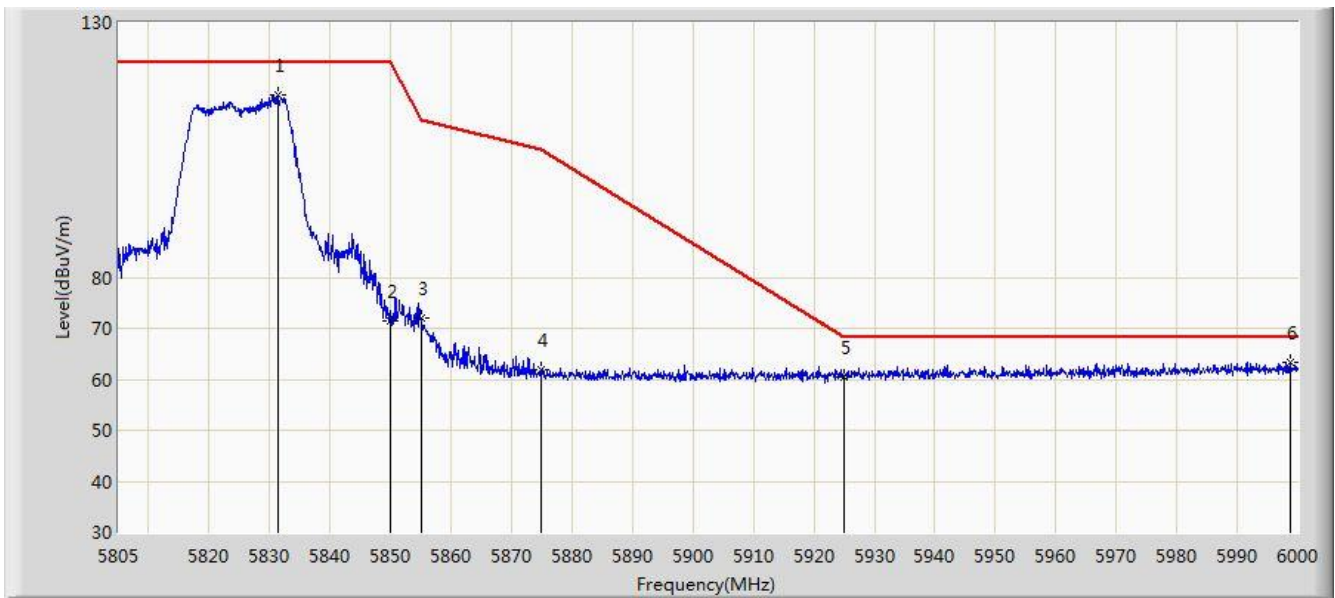


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5831.325	115.668	110.043	N/A	N/A	5.624	PK
2			5850.000	71.483	65.757	-50.717	122.200	5.726	PK
3			5855.000	71.933	66.187	-38.867	110.800	5.746	PK
4			5875.000	61.960	56.140	-43.240	105.200	5.820	PK
5			5925.000	60.550	54.584	-7.650	68.200	5.967	PK
6		*	5998.732	63.404	57.295	-4.796	68.200	6.108	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 20:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 5180MHz (CDD Mode)	

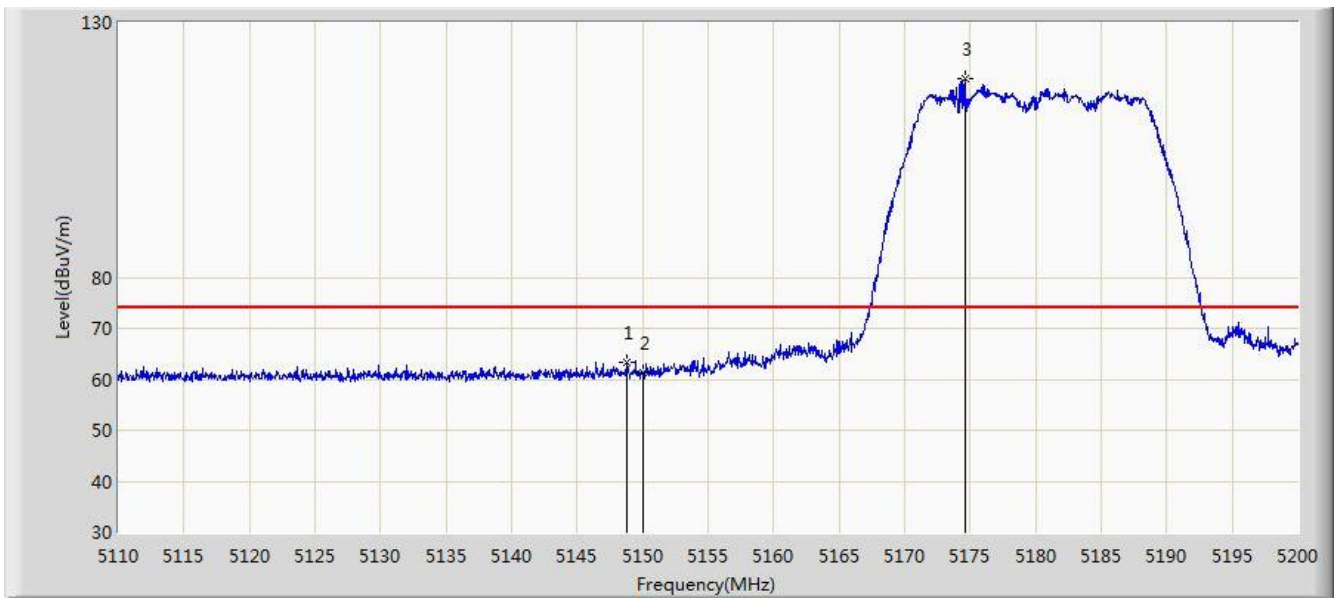


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.745	63.380	59.207	-10.620	74.000	4.174	PK
2			5150.000	61.325	57.156	-12.675	74.000	4.170	PK
3		*	5174.620	119.029	114.941	N/A	N/A	4.088	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 20:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 5180MHz (CDD Mode)	

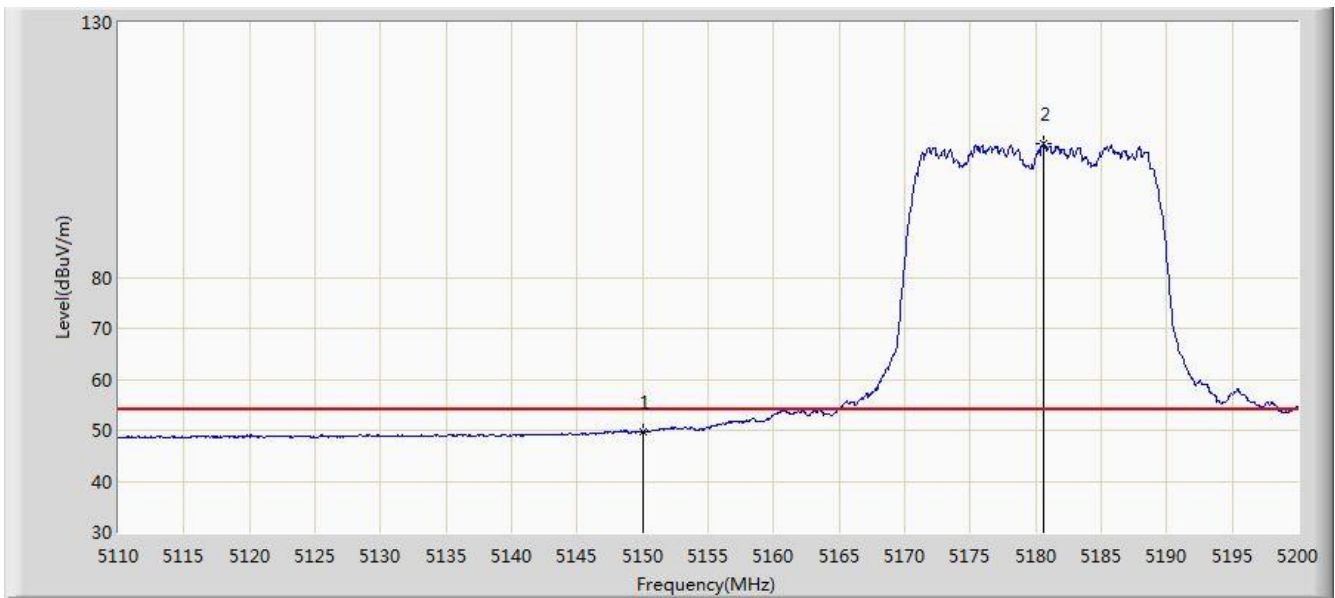


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.692	45.523	-4.308	54.000	4.170	AV
2		*	5180.560	106.242	102.175	N/A	N/A	4.067	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 20:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 5180MHz (CDD Mode)	

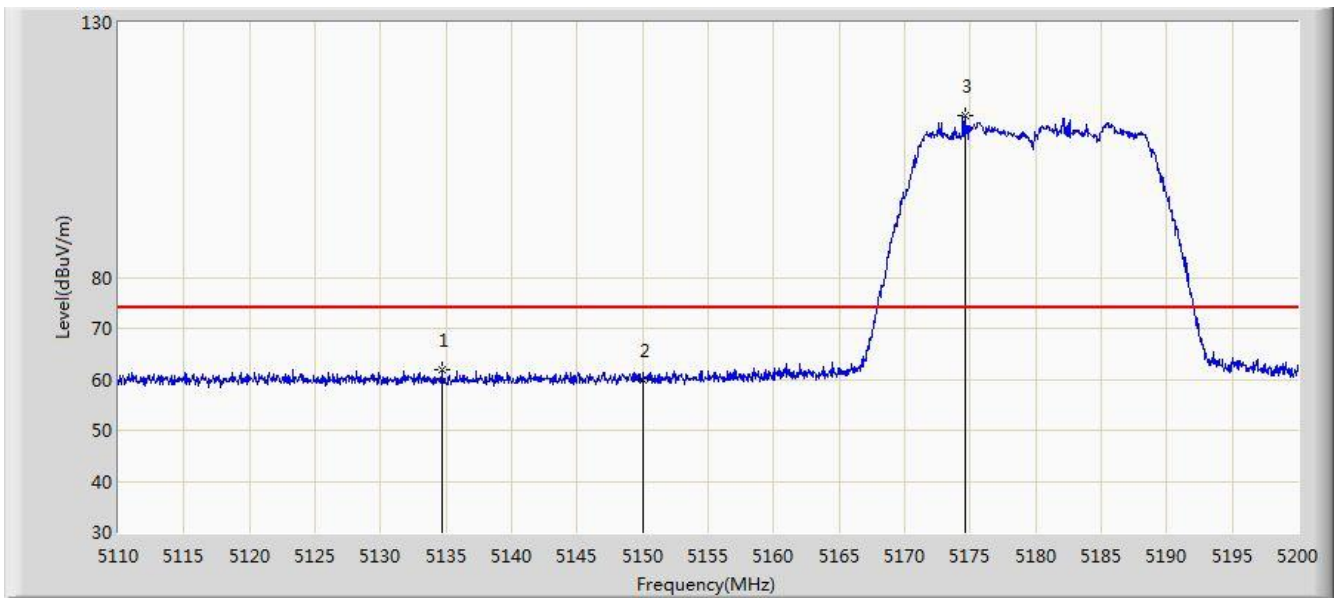


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5134.705	61.941	57.766	-12.059	74.000	4.175	PK
2			5150.000	60.000	55.831	-14.000	74.000	4.170	PK
3		*	5174.575	111.742	107.654	N/A	N/A	4.088	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 20:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 5180MHz (CDD Mode)	

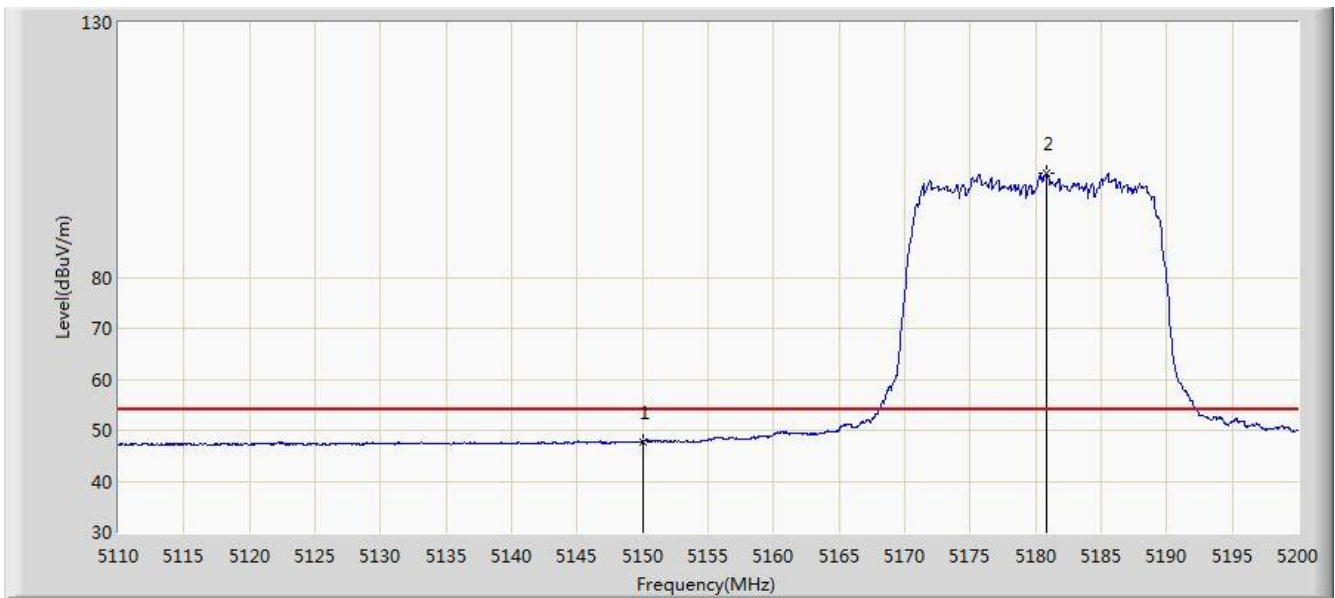


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.711	43.542	-6.289	54.000	4.170	AV
2		*	5180.830	100.342	96.276	N/A	N/A	4.066	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 20:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 5320MHz (CDD Mode)	

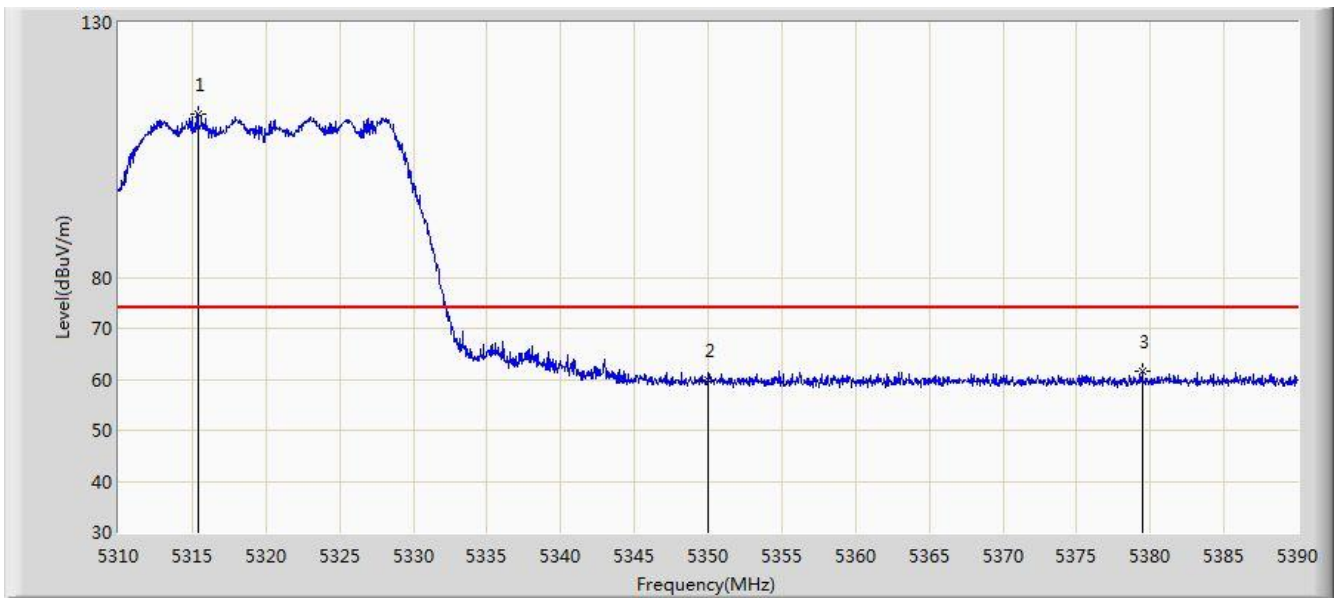


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.400	112.161	108.321	N/A	N/A	3.840	PK
2			5350.000	59.740	55.835	-14.260	74.000	3.904	PK
3			5379.440	61.536	57.578	-12.464	74.000	3.958	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 20:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 5320MHz (CDD Mode)	

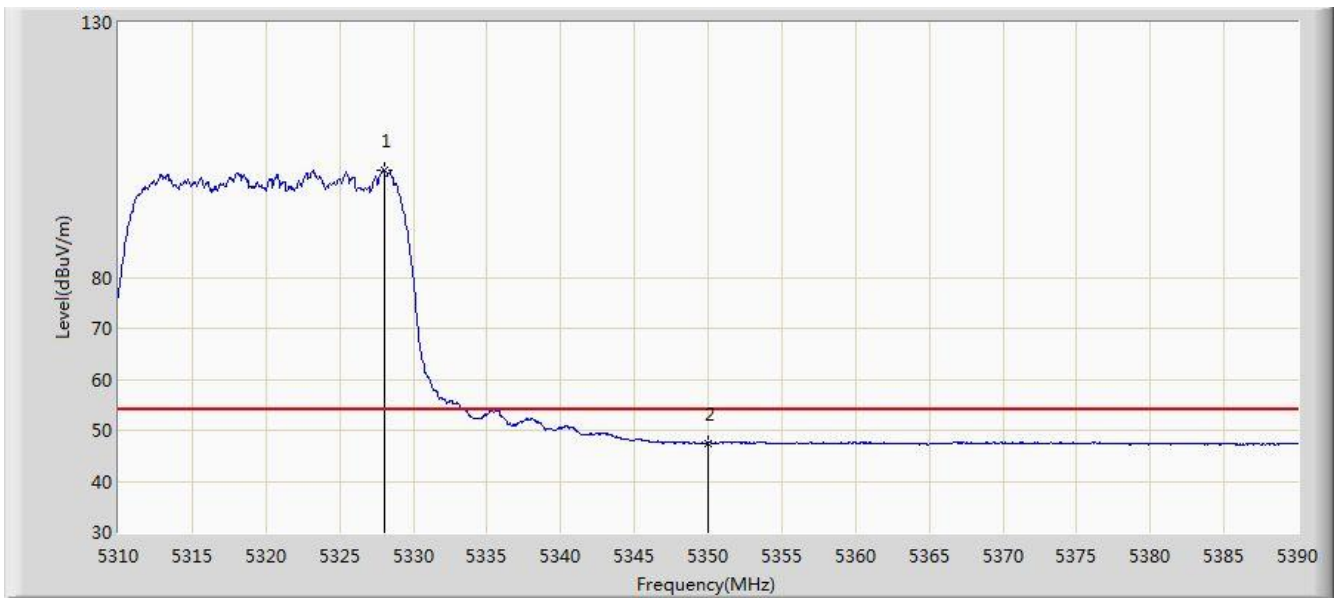


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5328.000	101.018	97.154	N/A	N/A	3.864	AV
2			5350.000	47.510	43.605	-6.490	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 20:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 5320MHz (CDD Mode)	

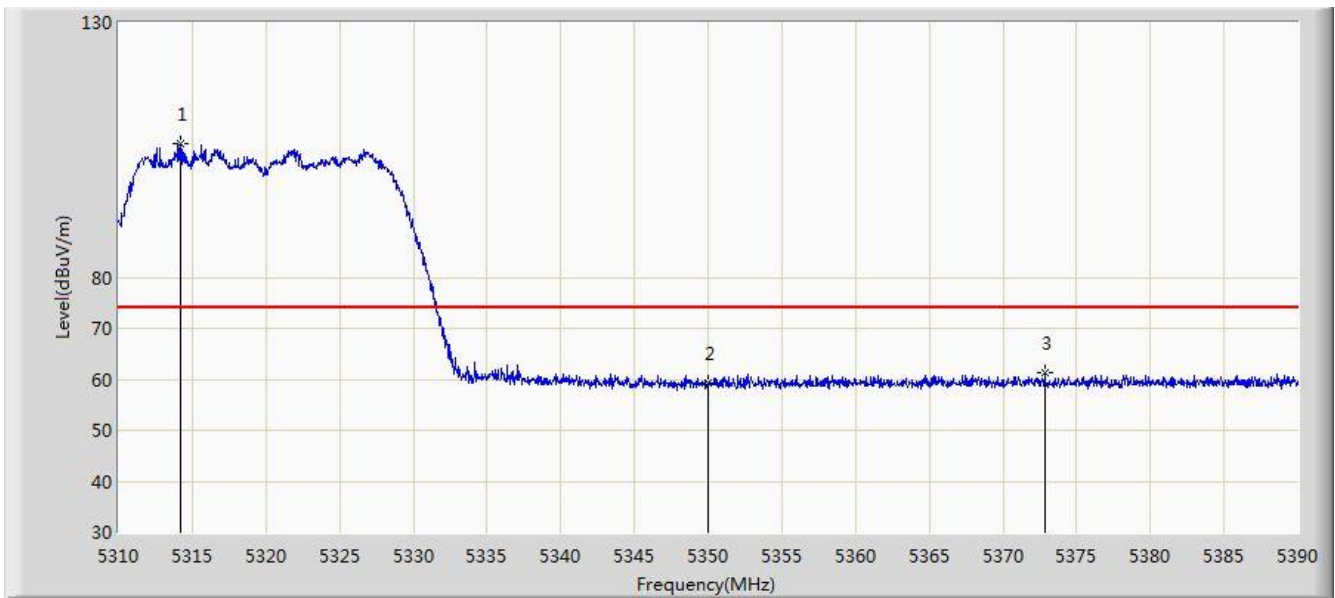


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.200	106.365	102.527	N/A	N/A	3.838	PK
2			5350.000	59.388	55.483	-14.612	74.000	3.904	PK
3			5372.840	61.362	57.416	-12.638	74.000	3.946	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 20:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 5320MHz (CDD Mode)	

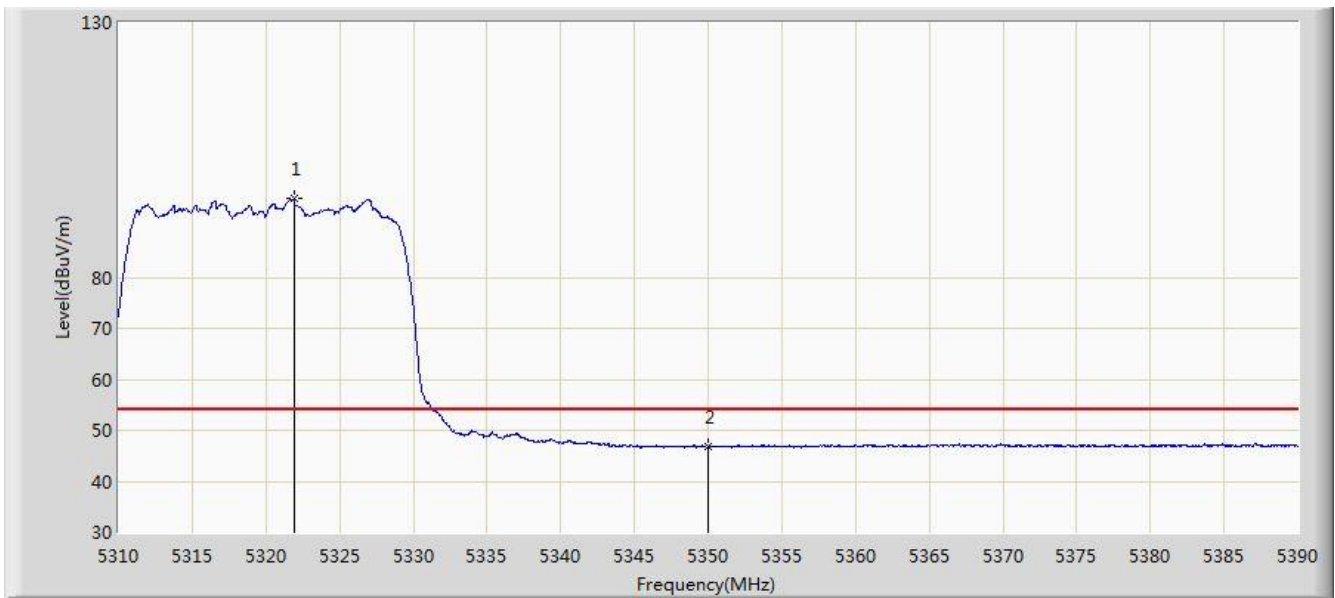


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.880	95.398	91.546	N/A	N/A	3.852	AV
2			5350.000	46.823	42.918	-7.177	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 20:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 5500MHz (CDD Mode)	

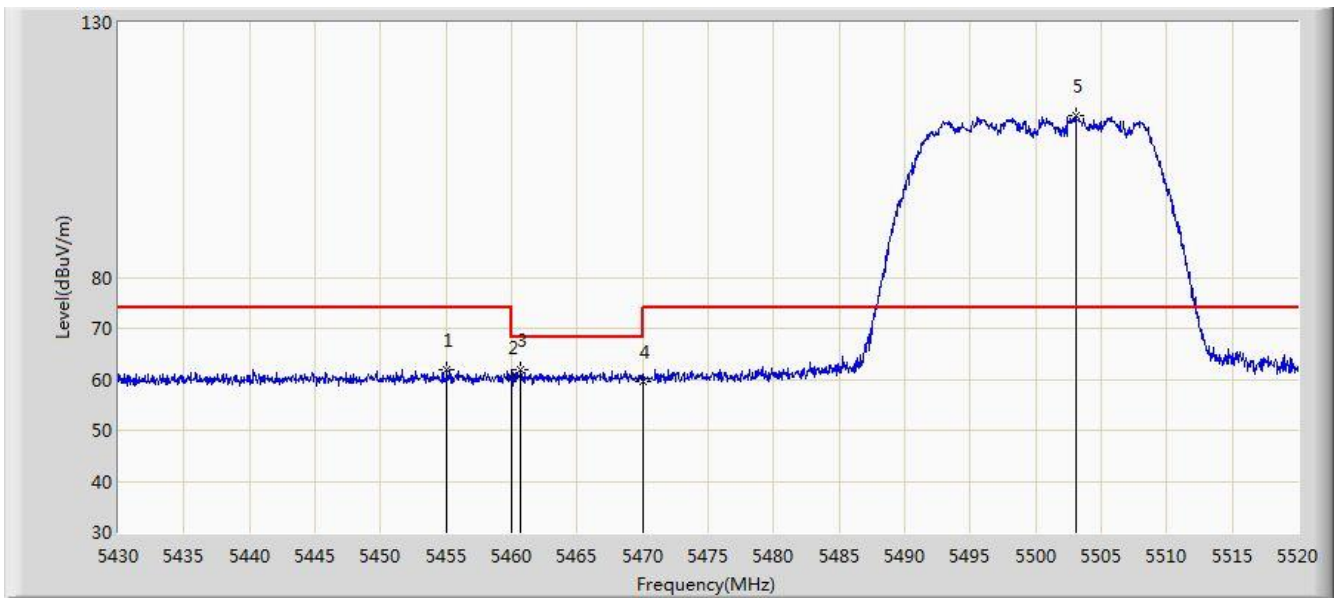


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.065	61.884	57.714	-12.116	74.000	4.170	PK
2			5460.000	60.295	56.115	-13.705	74.000	4.180	PK
3			5460.690	61.796	57.614	-6.404	68.200	4.182	PK
4			5470.000	59.628	55.426	-8.572	68.200	4.202	PK
5		*	5503.080	111.646	107.365	N/A	N/A	4.281	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 20:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 5500MHz (CDD Mode)	

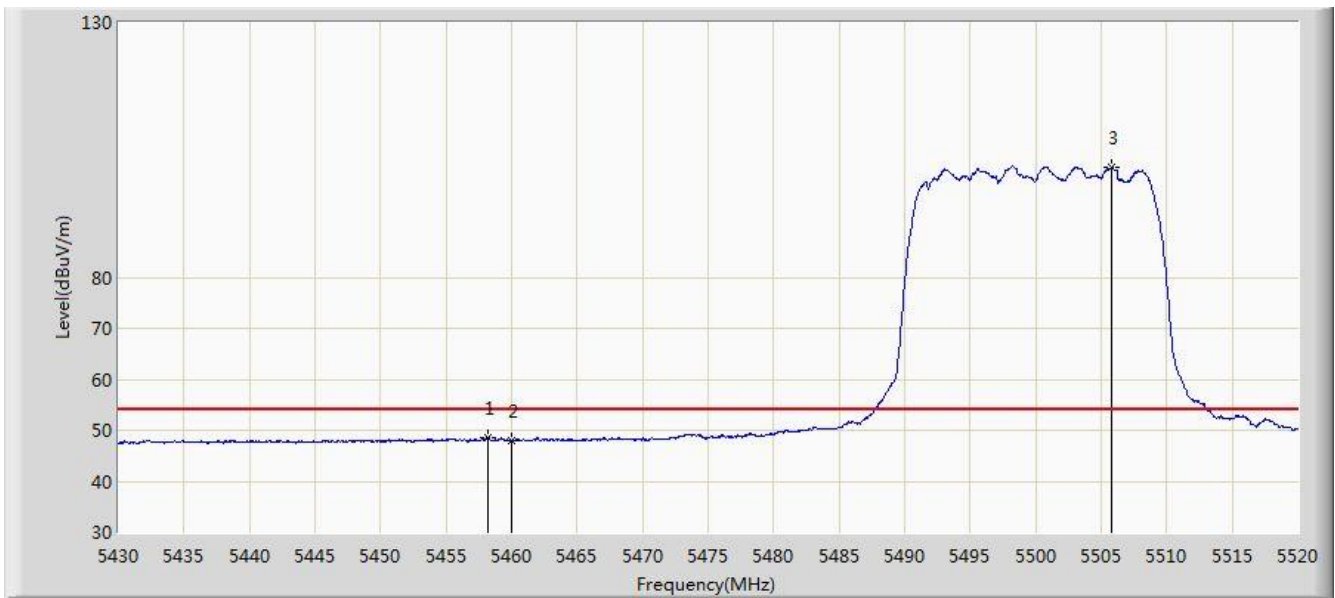


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.215	48.577	44.401	-5.423	54.000	4.177	AV
2			5460.000	47.974	43.794	-6.026	54.000	4.180	AV
3		*	5505.825	101.622	97.333	N/A	N/A	4.289	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 20:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 5500MHz (CDD Mode)	

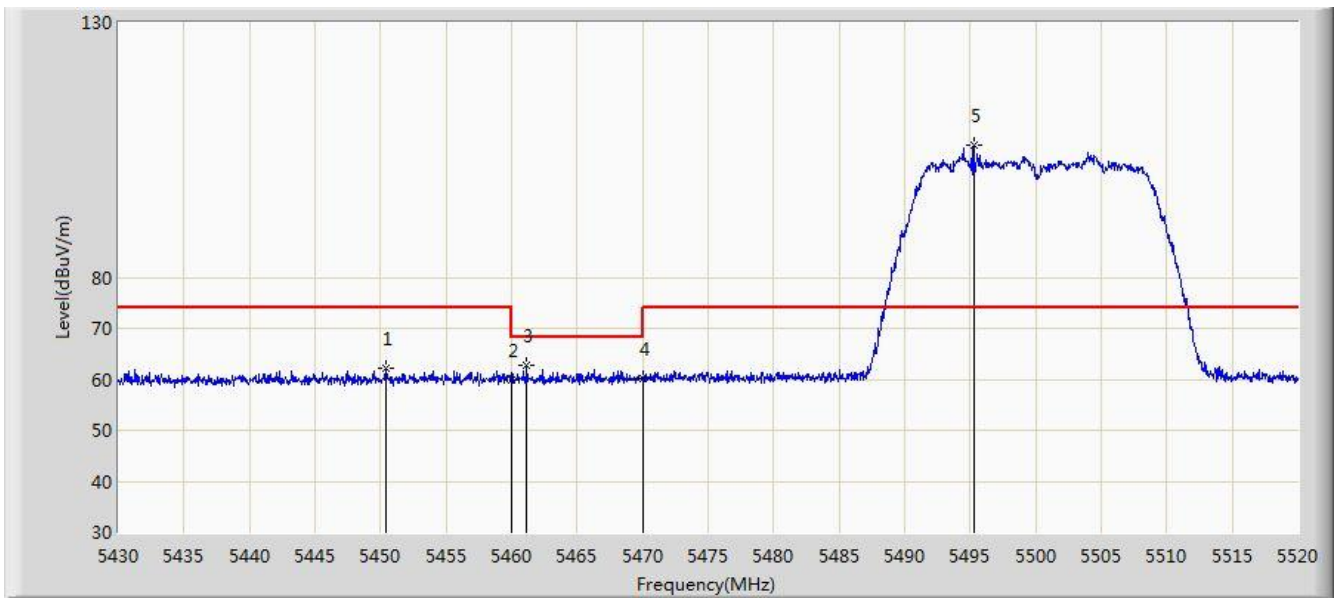


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5450.385	62.038	57.882	-11.962	74.000	4.157	PK
2			5460.000	59.828	55.648	-14.172	74.000	4.180	PK
3			5461.140	62.820	58.637	-5.380	68.200	4.183	PK
4			5470.000	60.280	56.078	-7.920	68.200	4.202	PK
5		*	5495.250	105.950	101.690	N/A	N/A	4.259	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 20:26
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 5500MHz (CDD Mode)	

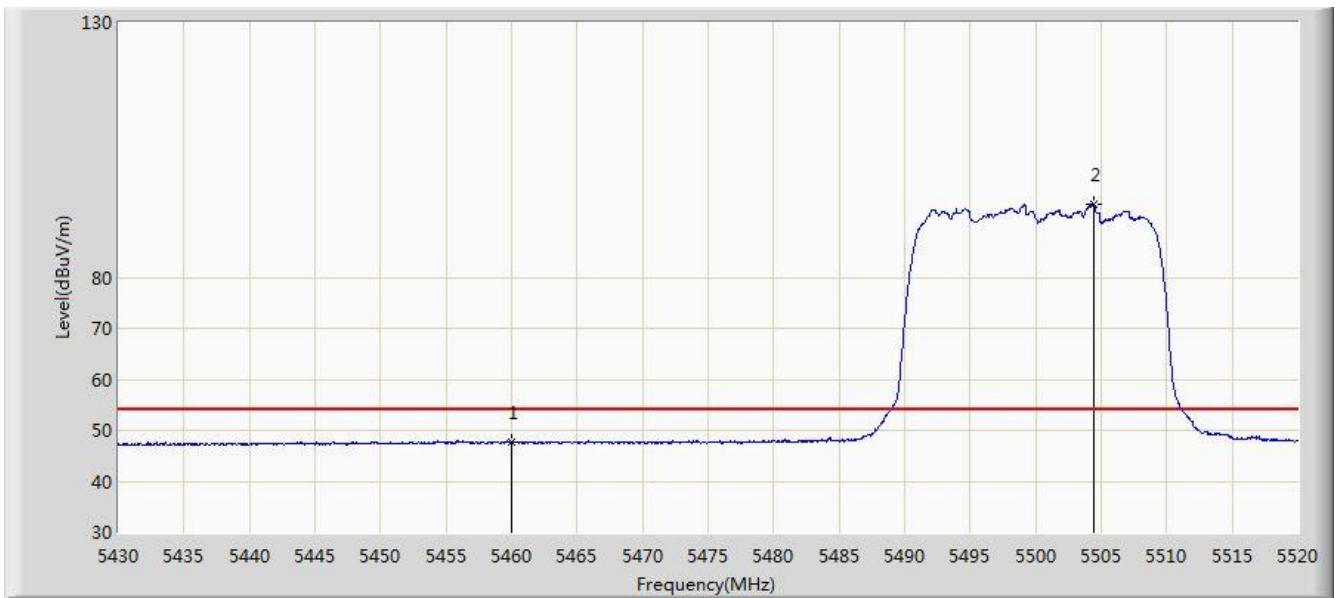


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.607	43.427	-6.393	54.000	4.180	AV
2		*	5504.430	94.313	90.028	N/A	N/A	4.285	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 20:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 5700MHz (CDD Mode)	

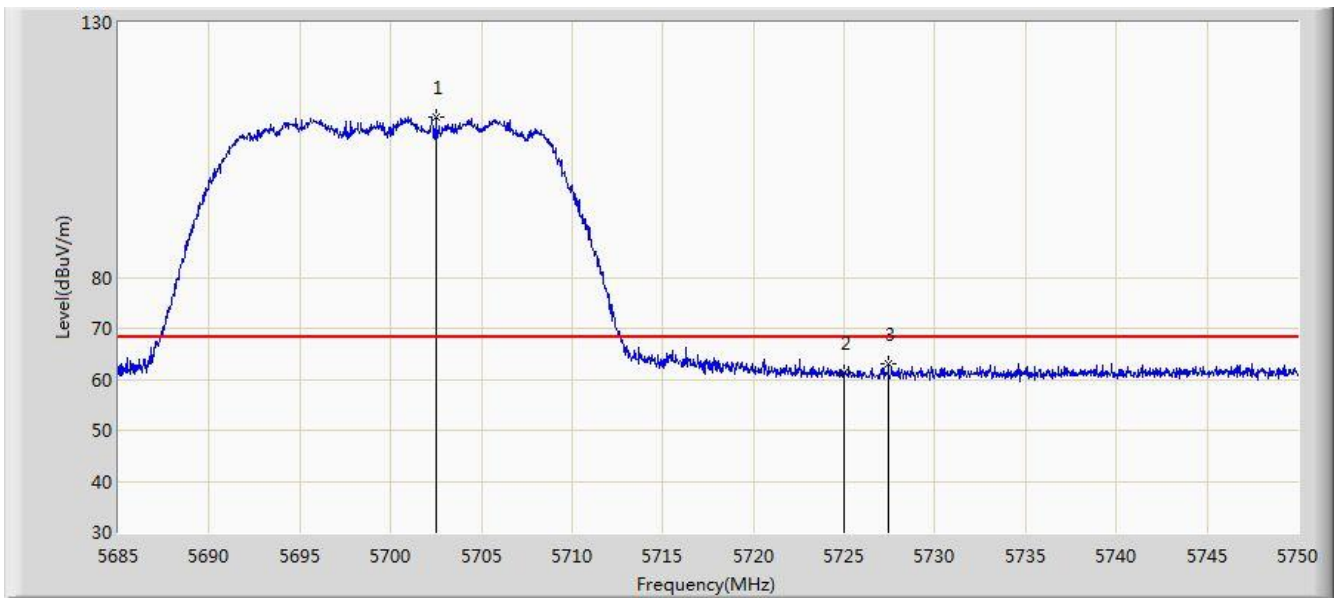


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.518	111.488	106.596	N/A	N/A	4.891	PK
2			5725.000	61.208	56.179	-6.992	68.200	5.029	PK
3			5727.445	63.076	58.031	-5.124	68.200	5.044	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 20:32
Limit: NCC LP0002_1GHz-40GHz 68.2	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 5700MHz (CDD Mode)	

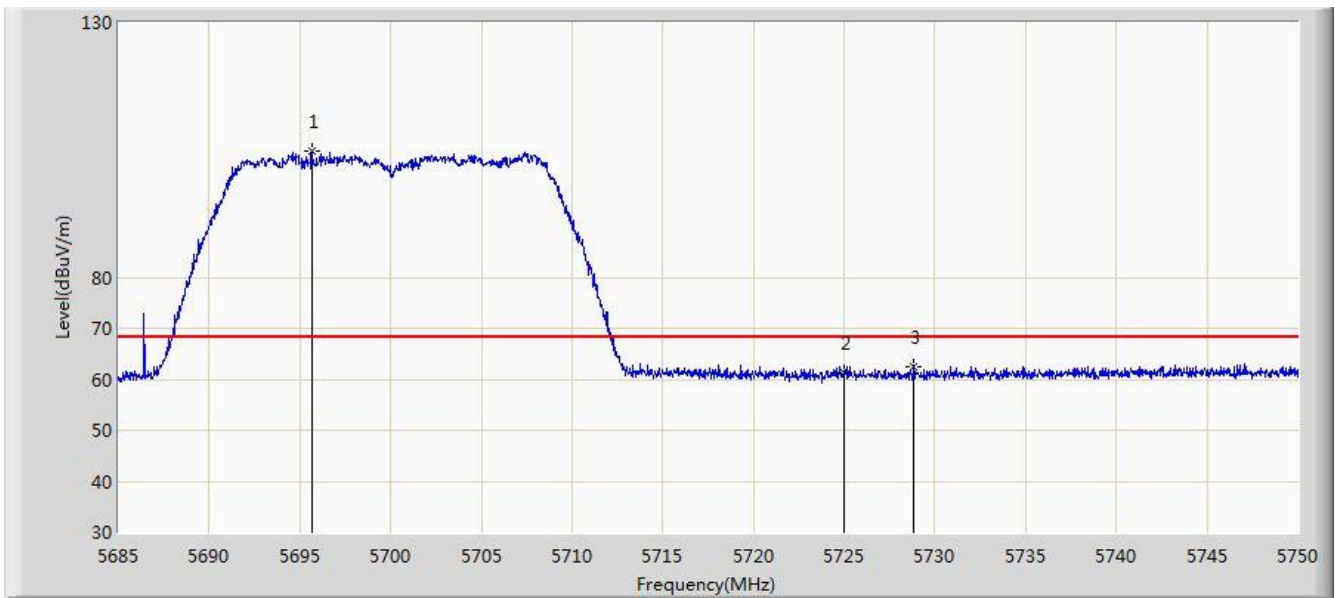


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5695.660	104.790	99.935	N/A	N/A	4.855	PK
2			5725.000	61.327	56.298	-6.873	68.200	5.029	PK
3			5728.842	62.602	57.548	-5.598	68.200	5.054	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 20:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 5745MHz (CDD Mode)	

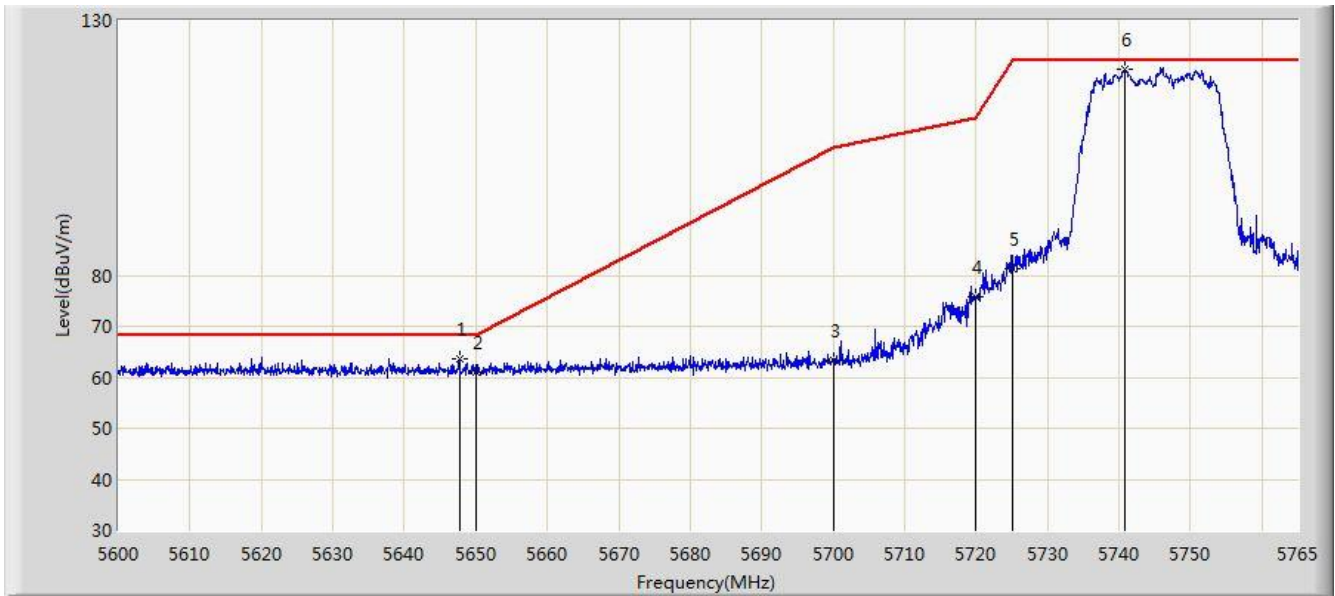


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5647.685	63.702	59.039	-4.498	68.200	4.663	PK
2			5650.000	61.070	56.399	-7.130	68.200	4.671	PK
3			5700.000	63.383	58.505	-41.817	105.200	4.878	PK
4			5720.000	75.881	70.884	-34.919	110.800	4.997	PK
5			5725.000	81.165	76.136	-41.035	122.200	5.029	PK
6		*	5740.828	120.484	115.354	N/A	N/A	5.130	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 20:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 5745MHz (CDD Mode)	

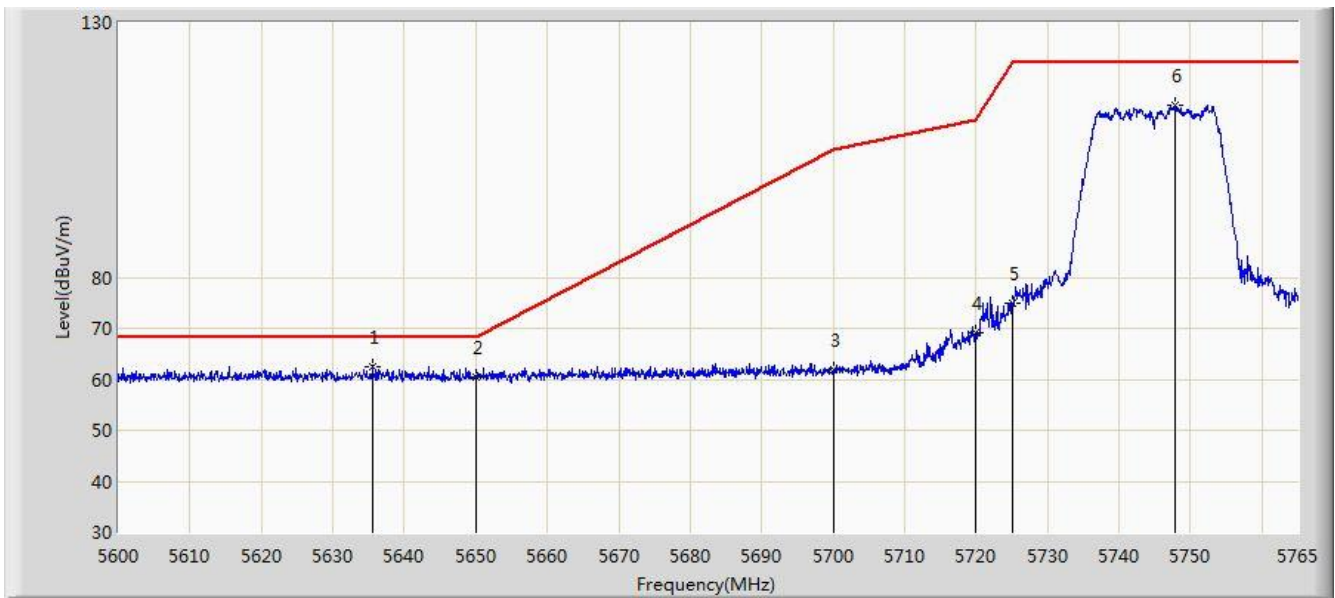


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5635.558	62.605	57.980	-5.595	68.200	4.625	PK
2			5650.000	60.561	55.890	-7.639	68.200	4.671	PK
3			5700.000	61.939	57.061	-43.261	105.200	4.878	PK
4			5720.000	69.043	64.046	-41.757	110.800	4.997	PK
5			5725.000	74.799	69.770	-47.401	122.200	5.029	PK
6			5747.757	113.825	108.654	N/A	N/A	5.170	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 20:39
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 5825MHz (CDD Mode)	

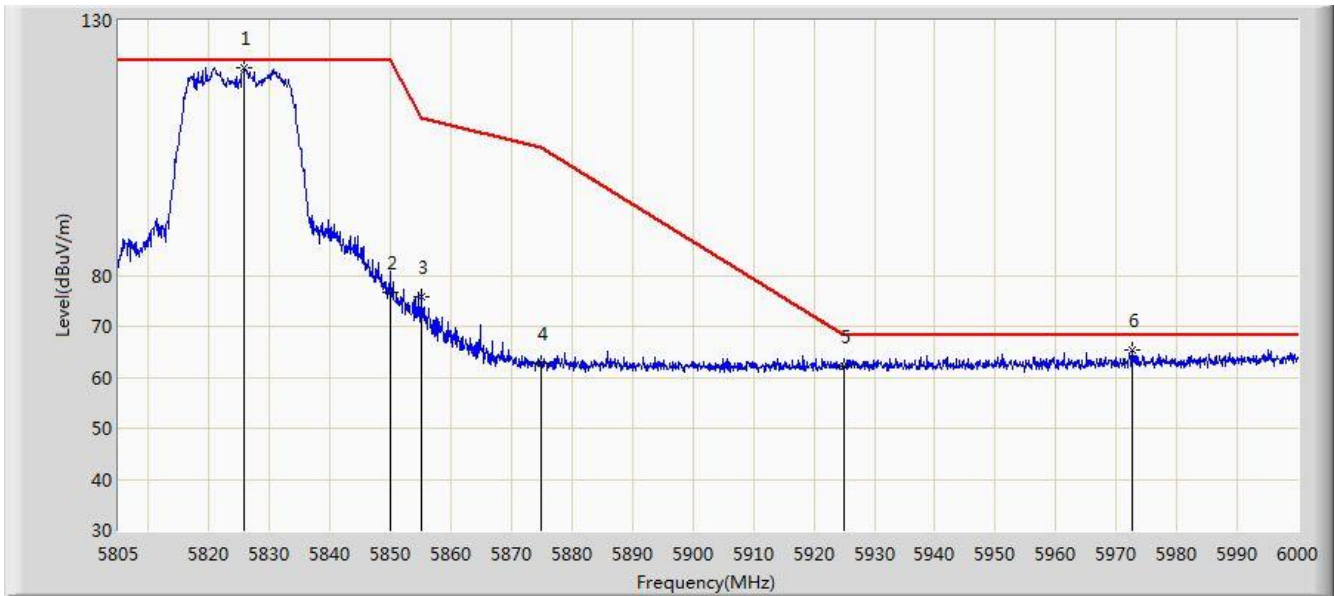


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5825.768	120.673	115.081	N/A	N/A	5.592	PK
2			5850.000	76.570	70.844	-45.630	122.200	5.726	PK
3			5855.000	75.925	70.179	-34.875	110.800	5.746	PK
4			5875.000	62.825	57.005	-42.375	105.200	5.820	PK
5			5925.000	62.103	56.137	-6.097	68.200	5.967	PK
6			5972.603	65.256	59.191	-2.944	68.200	6.065	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 20:42
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT20 at Channel 5825MHz (CDD Mode)	

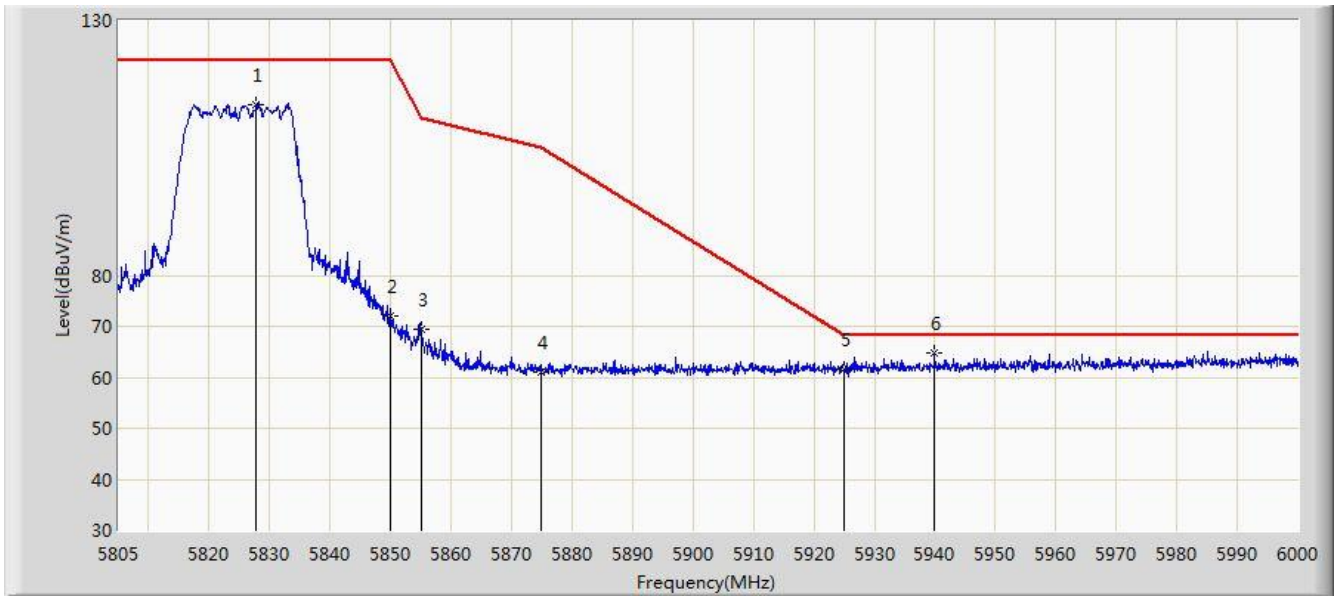


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5827.815	113.387	107.783	N/A	N/A	5.605	PK
2			5850.000	71.962	66.236	-50.238	122.200	5.726	PK
3			5855.000	69.433	63.687	-41.367	110.800	5.746	PK
4			5875.000	61.118	55.298	-44.082	105.200	5.820	PK
5			5925.000	61.596	55.630	-6.604	68.200	5.967	PK
6		*	5939.940	64.813	58.810	-3.387	68.200	6.004	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 20:45
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 5190MHz (CDD Mode)	

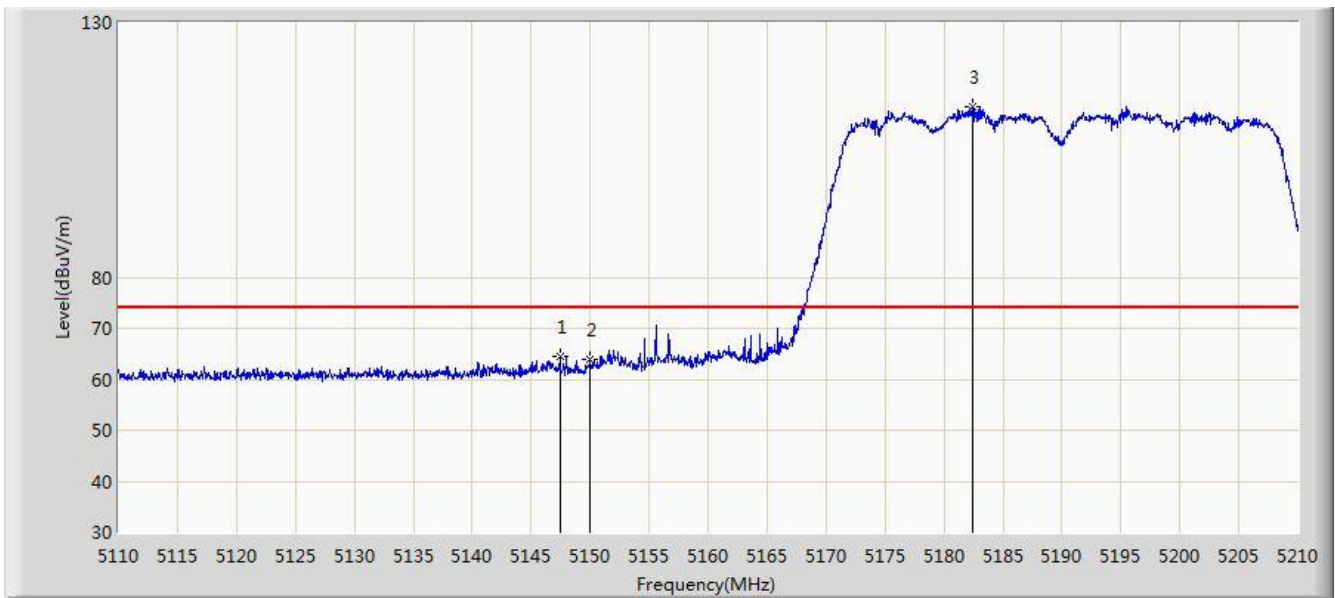


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.450	64.578	60.402	-9.422	74.000	4.176	PK
2			5150.000	63.792	59.623	-10.208	74.000	4.170	PK
3		*	5182.400	113.391	109.331	N/A	N/A	4.061	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 20:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 5190MHz (CDD Mode)	

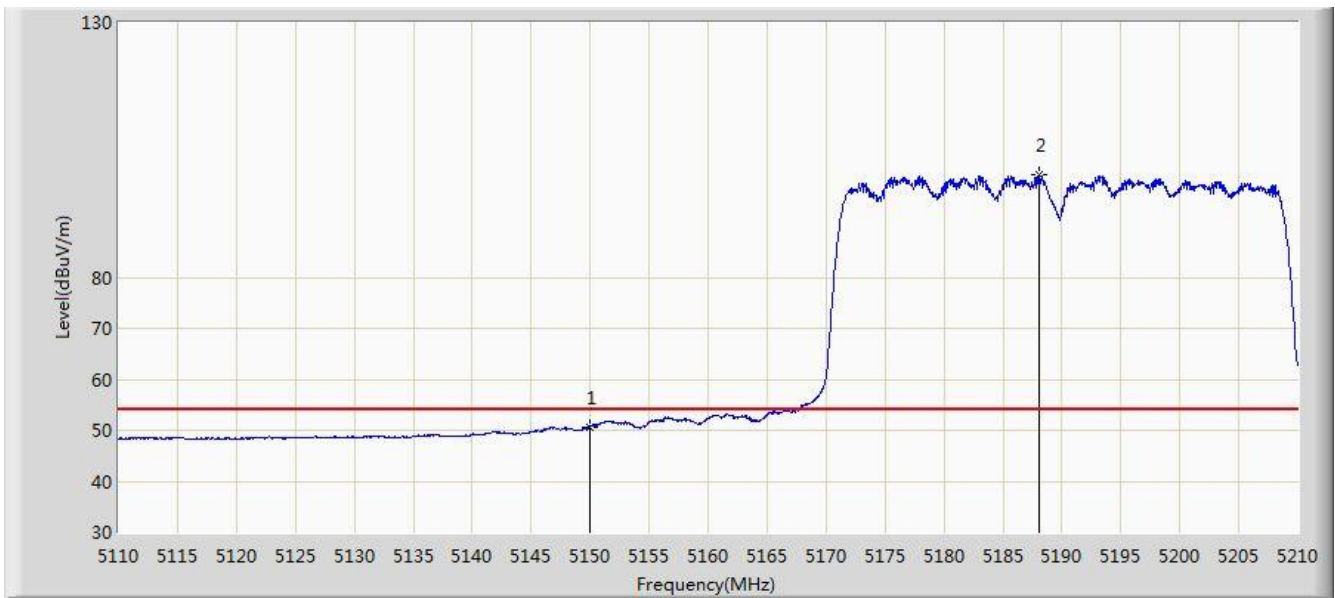


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.666	46.497	-3.334	54.000	4.170	AV
2		*	5188.050	100.081	96.041	N/A	N/A	4.040	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 20:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 5190MHz (CDD Mode)	

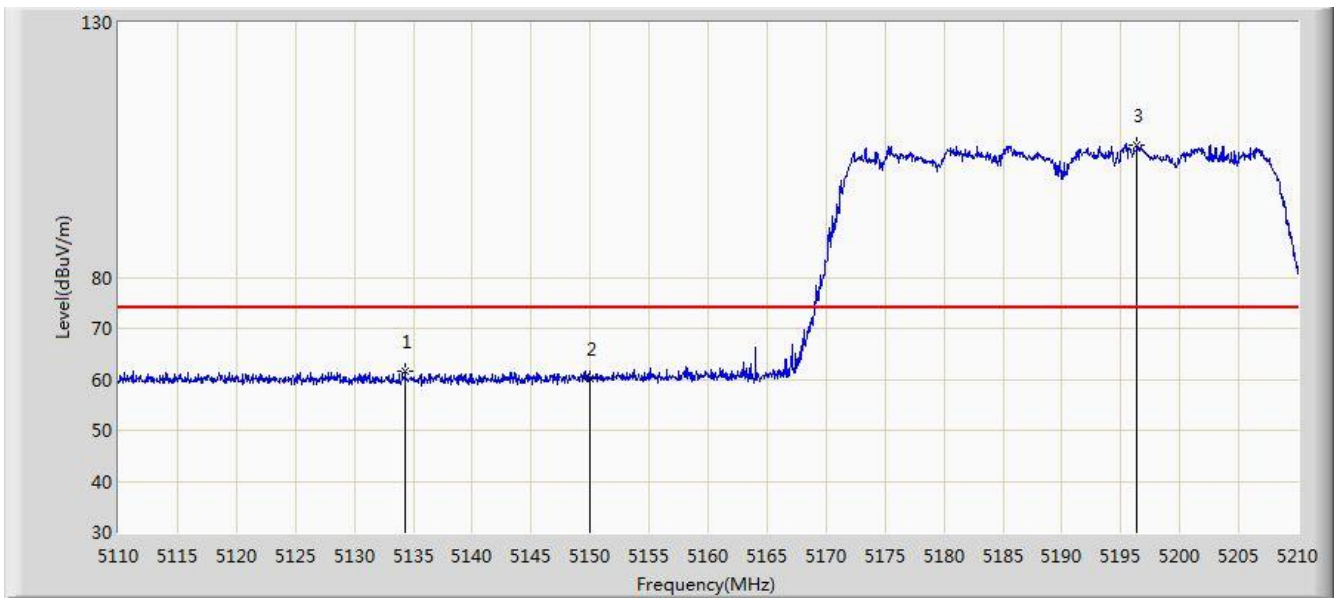


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5134.300	61.532	57.357	-12.468	74.000	4.175	PK
2			5150.000	60.131	55.962	-13.869	74.000	4.170	PK
3		*	5196.350	106.084	102.073	N/A	N/A	4.011	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 20:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 5190MHz (CDD Mode)	

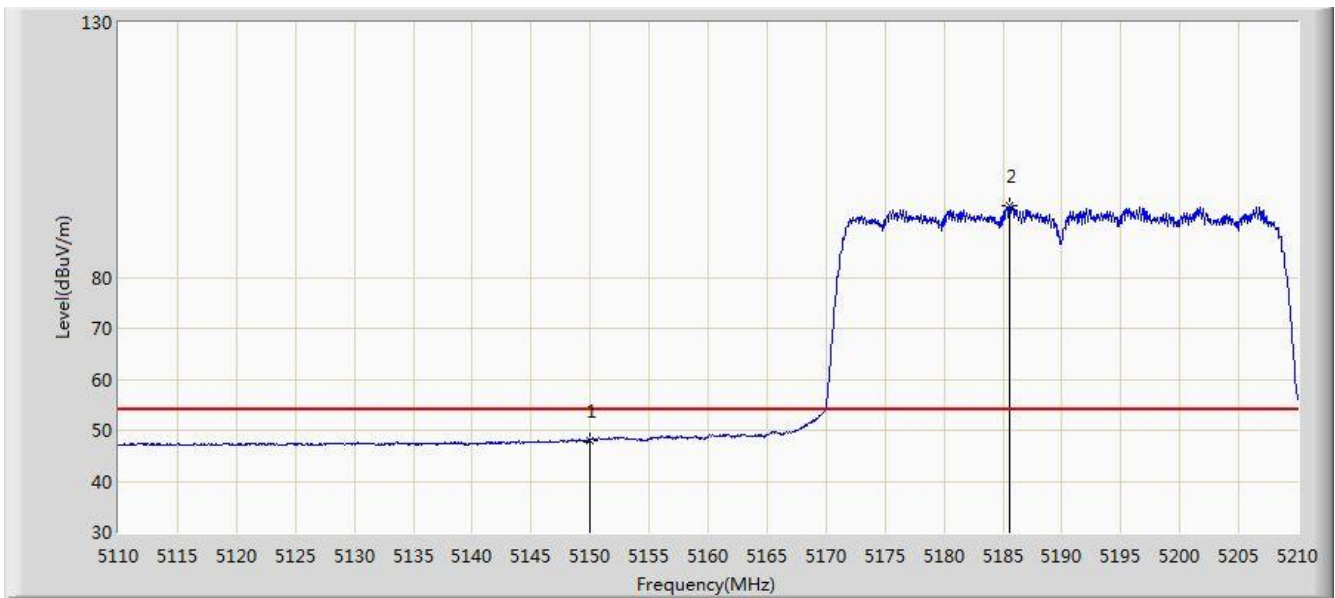


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.085	43.916	-5.915	54.000	4.170	AV
2		*	5185.600	94.156	90.107	N/A	N/A	4.049	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 20:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 5310MHz (CDD Mode)	

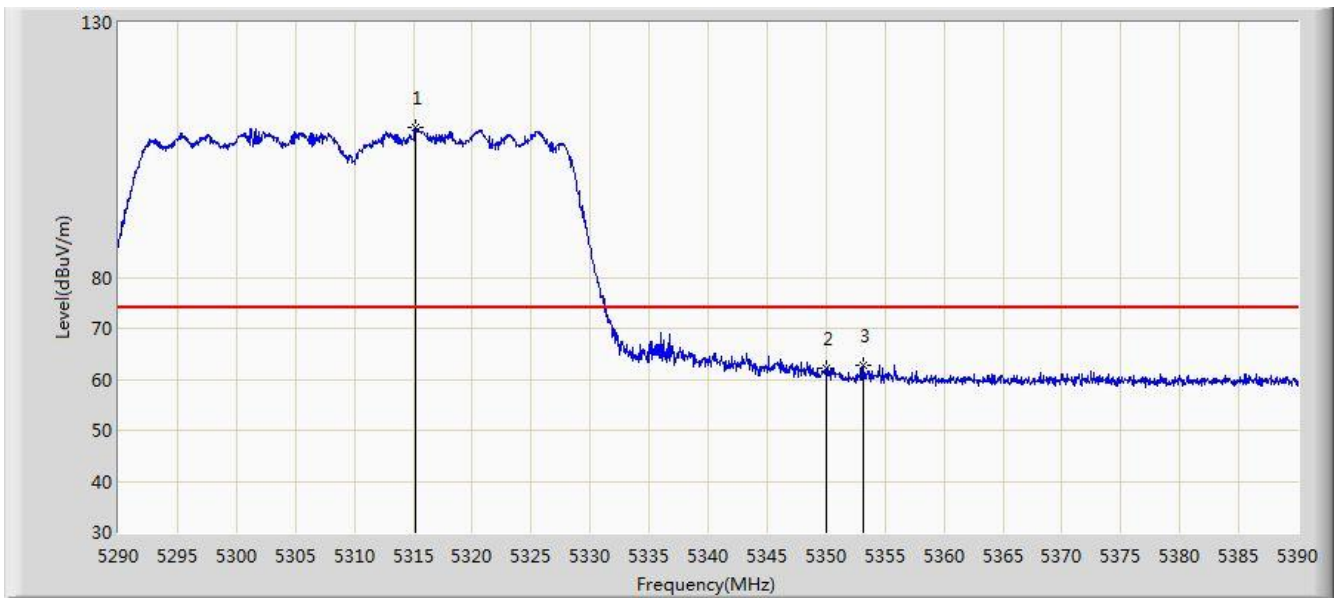


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.250	109.427	105.587	N/A	N/A	3.840	PK
2			5350.000	62.162	58.257	-11.838	74.000	3.904	PK
3			5353.100	62.629	58.719	-11.371	74.000	3.911	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 20:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 5310MHz (CDD Mode)	

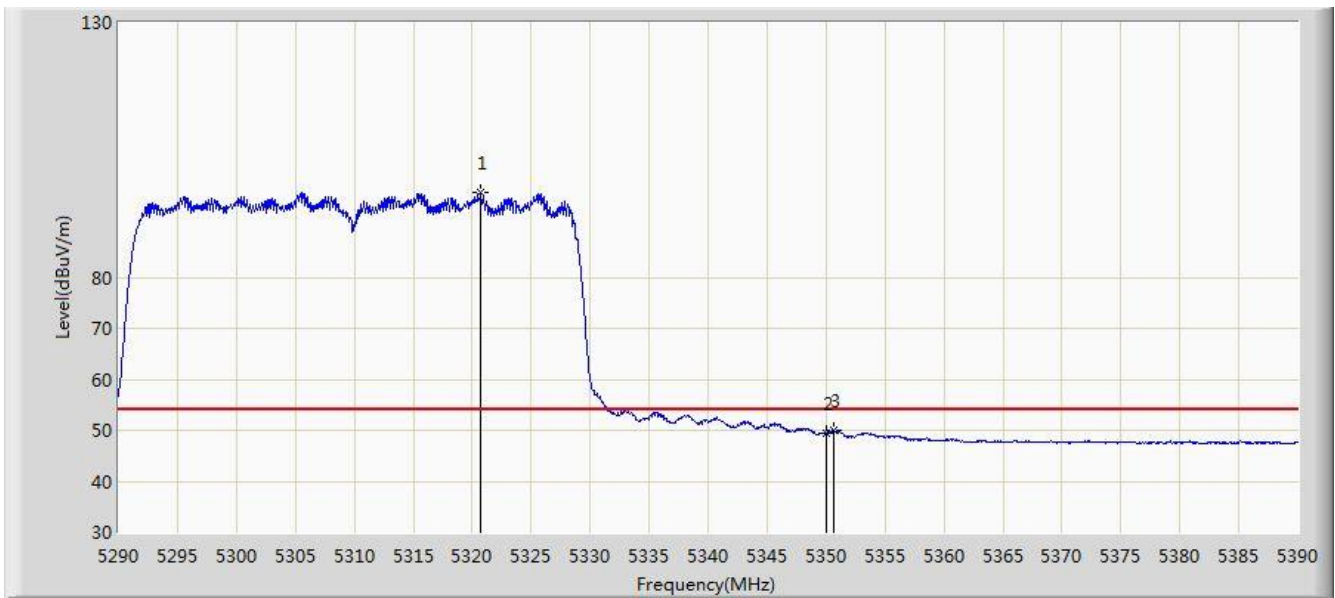


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5320.750	96.542	92.692	N/A	N/A	3.850	AV
2			5350.000	49.431	45.526	-4.569	54.000	3.904	AV
3			5350.700	50.084	46.178	-3.916	54.000	3.906	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 20:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 5310MHz (CDD Mode)	

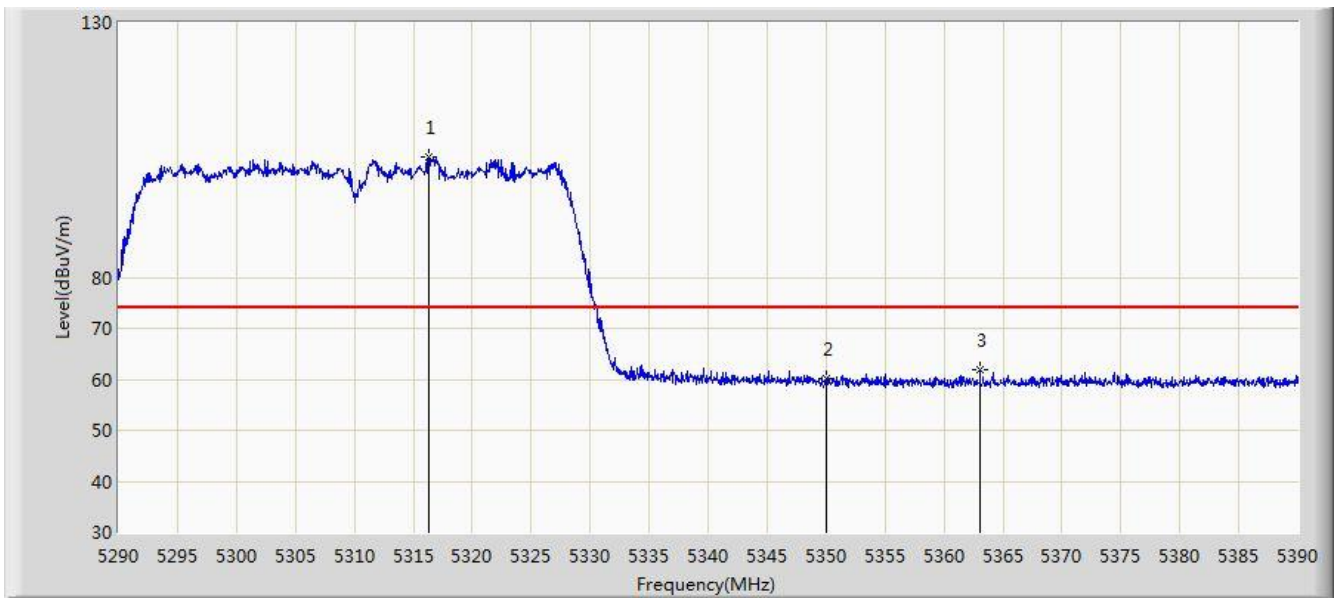


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5316.350	103.756	99.914	N/A	N/A	3.842	PK
2			5350.000	60.129	56.224	-13.871	74.000	3.904	PK
3			5363.050	62.007	58.079	-11.993	74.000	3.928	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 21:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 5310MHz (CDD Mode)	

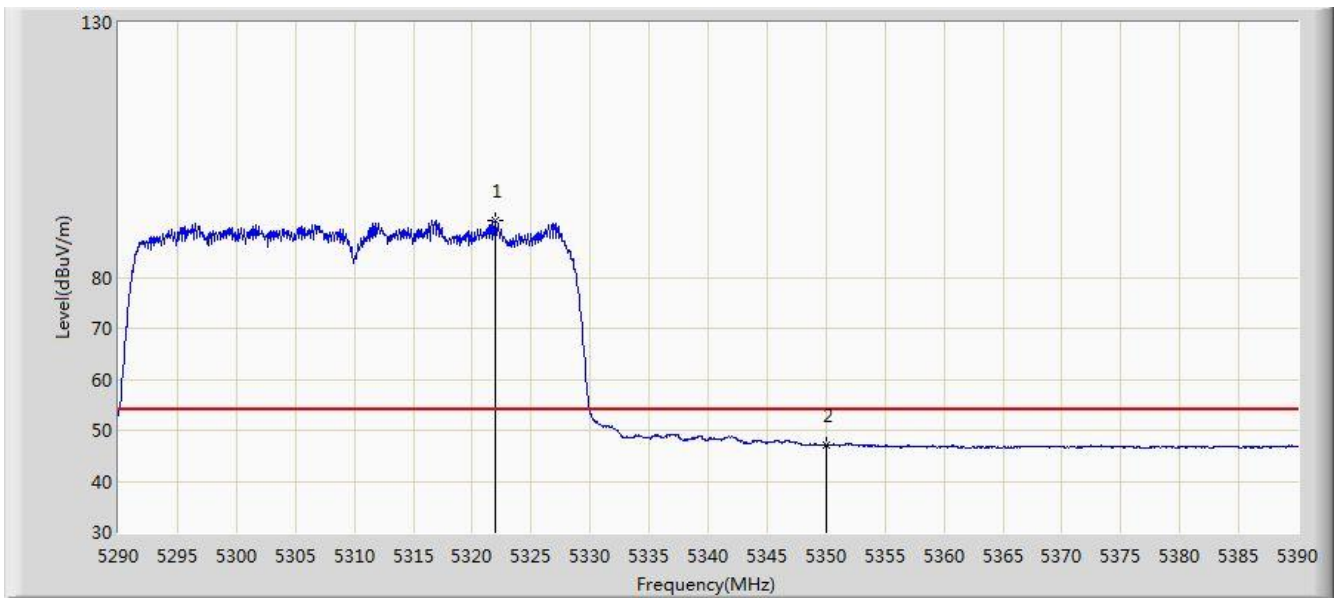


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.950	91.147	87.295	N/A	N/A	3.852	AV
2			5350.000	47.066	43.161	-6.934	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 21:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 5510MHz (CDD Mode)	

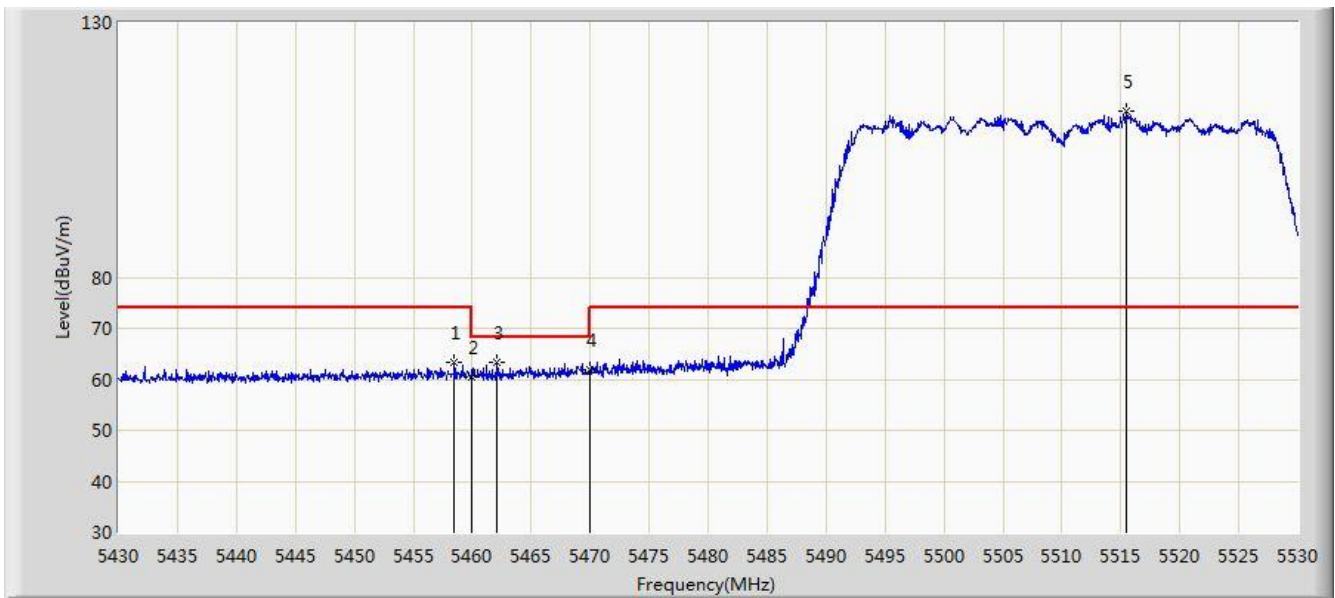


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.500	63.200	59.023	-10.800	74.000	4.177	PK
2			5460.000	60.575	56.395	-13.425	74.000	4.180	PK
3			5462.100	63.280	59.095	-4.920	68.200	4.185	PK
4			5470.000	61.943	57.741	-6.257	68.200	4.202	PK
5		*	5515.500	112.516	108.199	N/A	N/A	4.318	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 21:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 5510MHz (CDD Mode)	

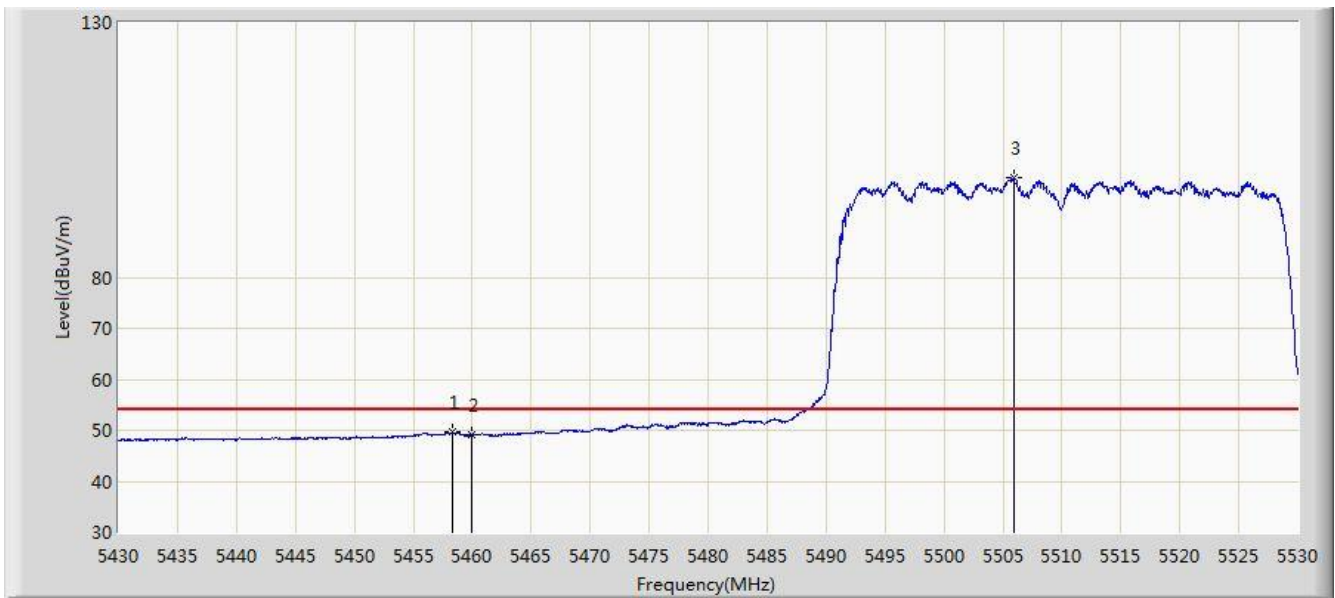


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.350	49.601	45.424	-4.399	54.000	4.177	AV
2			5460.000	49.129	44.949	-4.871	54.000	4.180	AV
3		*	5505.950	99.462	95.173	N/A	N/A	4.289	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 21:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 5510MHz (CDD Mode)	

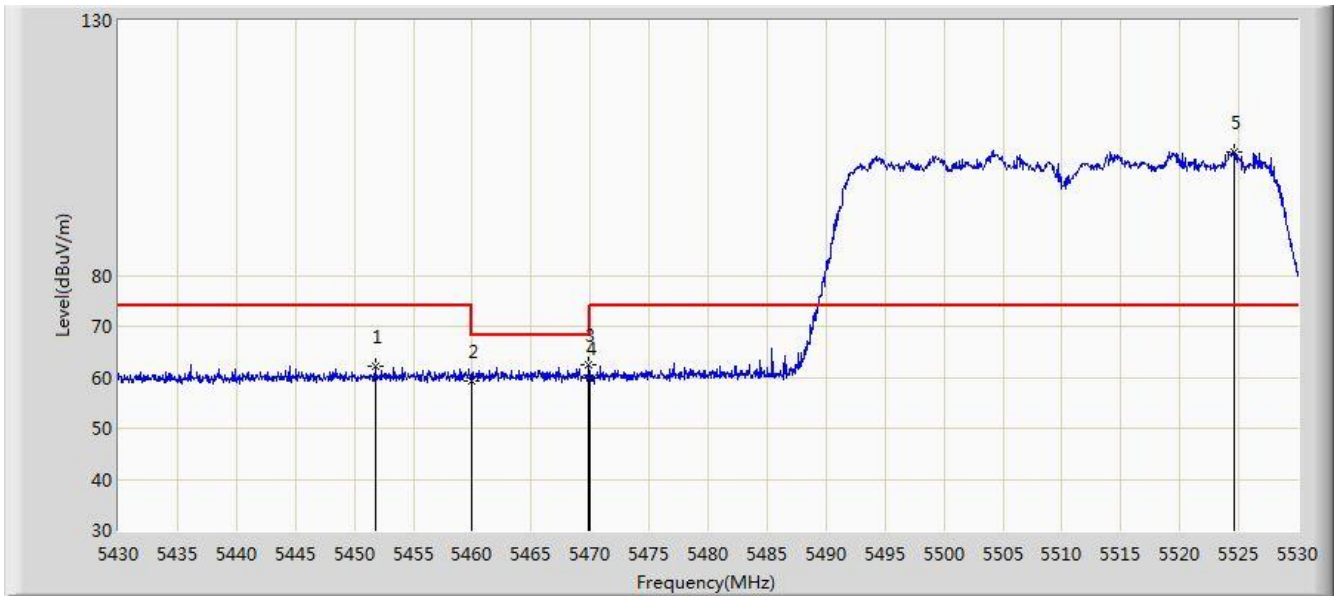


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5451.750	62.267	58.107	-11.733	74.000	4.160	PK
2			5460.000	59.373	55.193	-14.627	74.000	4.180	PK
3			5469.900	62.475	58.273	-5.725	68.200	4.202	PK
4			5470.000	59.907	55.705	-8.293	68.200	4.202	PK
5		*	5524.650	104.113	99.768	N/A	N/A	4.346	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 21:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 5510MHz (CDD Mode)	

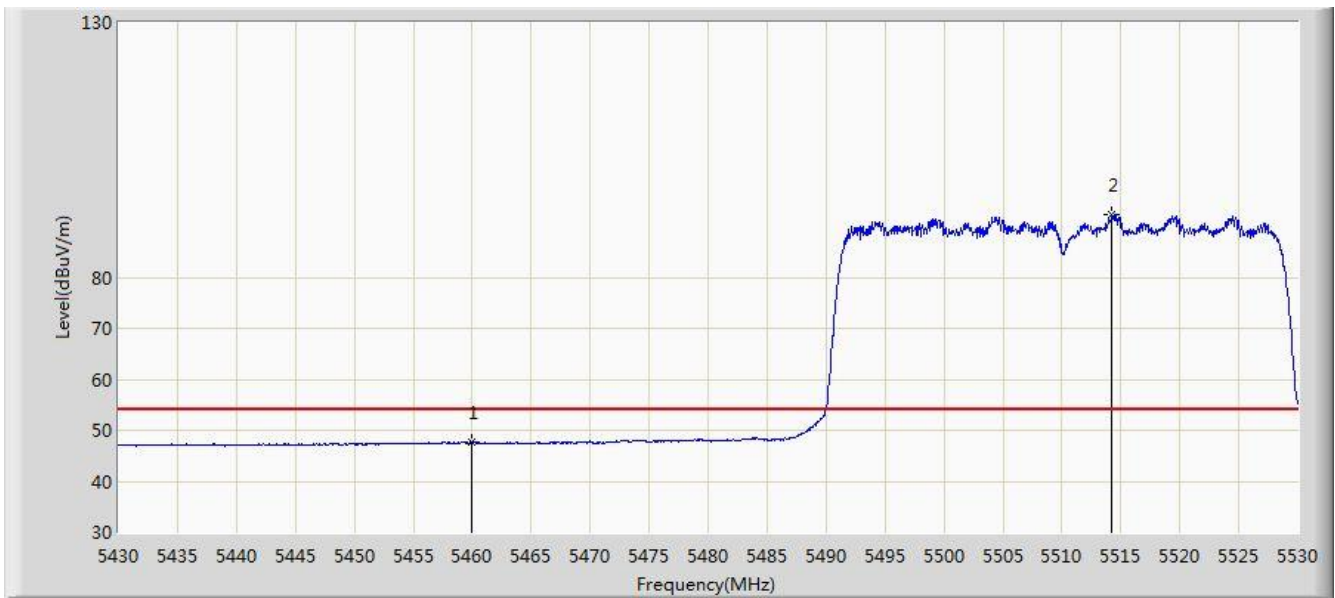


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.571	43.391	-6.429	54.000	4.180	AV
2		*	5514.250	92.179	85.366	N/A	N/A	6.812	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 21:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 5670MHz (CDD Mode)	

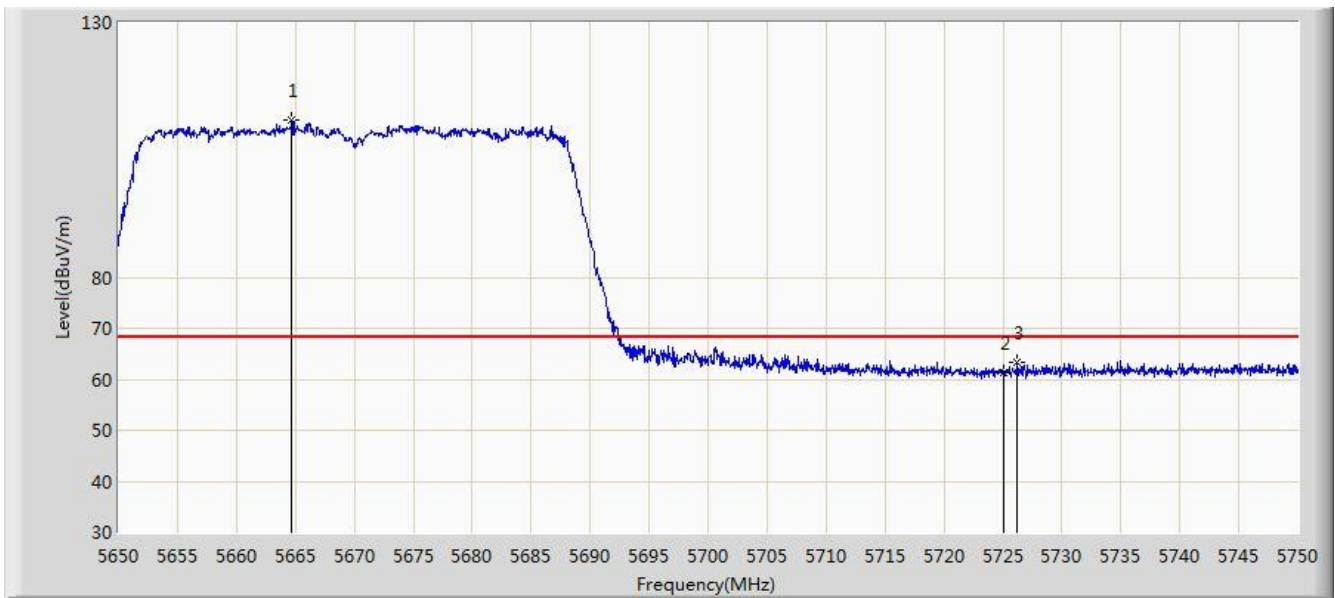


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5664.650	110.932	106.206	N/A	N/A	4.726	PK
2			5725.000	61.381	56.352	-6.819	68.200	5.029	PK
3			5726.200	63.384	58.347	-4.816	68.200	5.037	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 21:16
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 5670MHz (CDD Mode)	

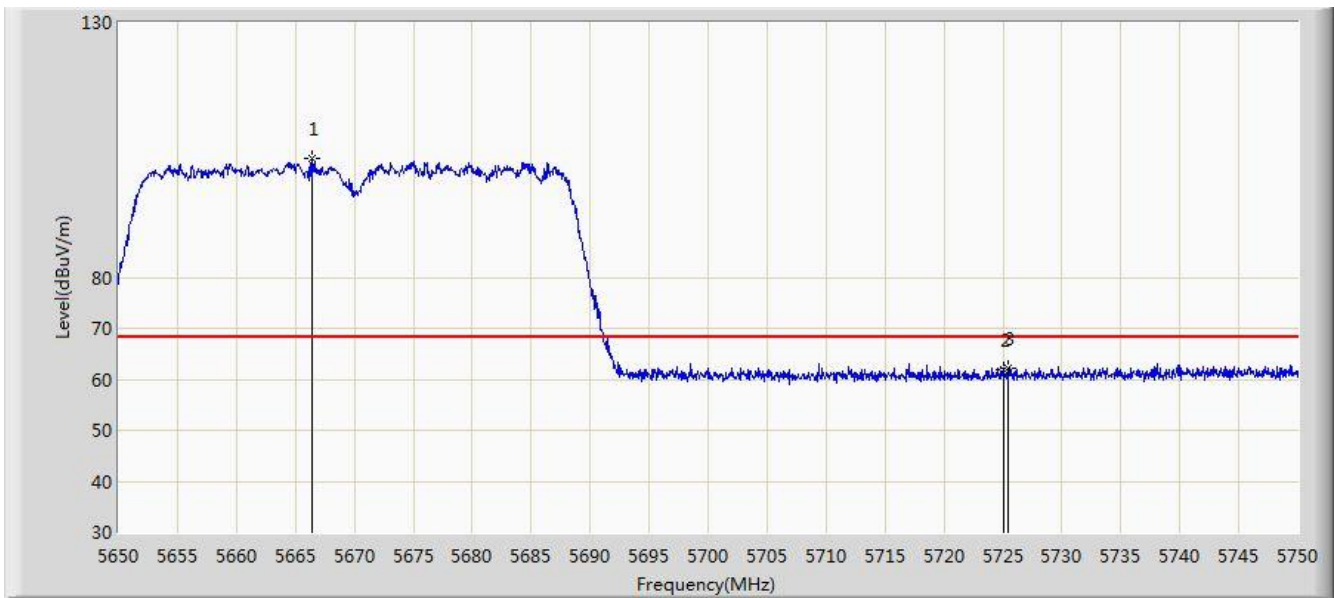


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5666.450	103.286	98.553	N/A	N/A	4.732	PK
2			5725.000	61.800	56.771	-6.400	68.200	5.029	PK
3			5725.500	62.309	57.277	-5.891	68.200	5.032	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 21:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 5755MHz (CDD Mode)	

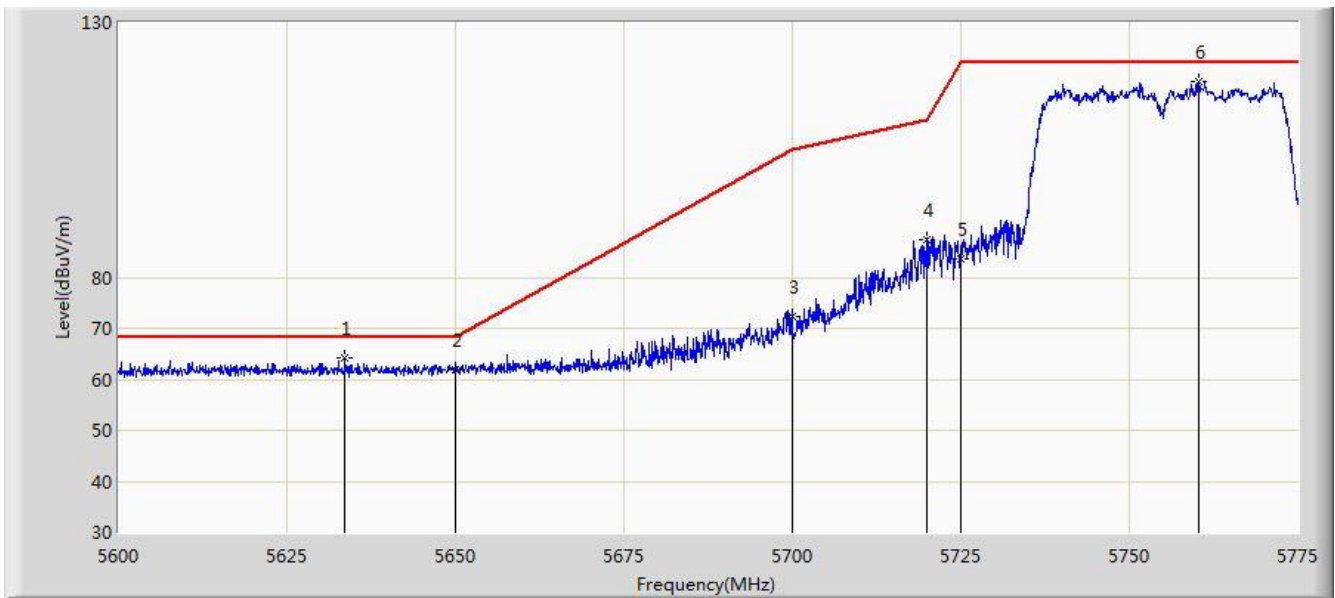


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5633.600	64.270	59.651	-3.930	68.200	4.620	PK
2			5650.000	61.819	57.148	-6.381	68.200	4.671	PK
3			5700.000	72.461	67.583	-32.739	105.200	4.878	PK
4			5720.000	87.466	82.469	-23.334	110.800	4.997	PK
5			5725.000	83.681	78.652	-38.519	122.200	5.029	PK
6		*	5760.212	118.288	113.047	N/A	N/A	5.241	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 21:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 5755MHz (CDD Mode)	

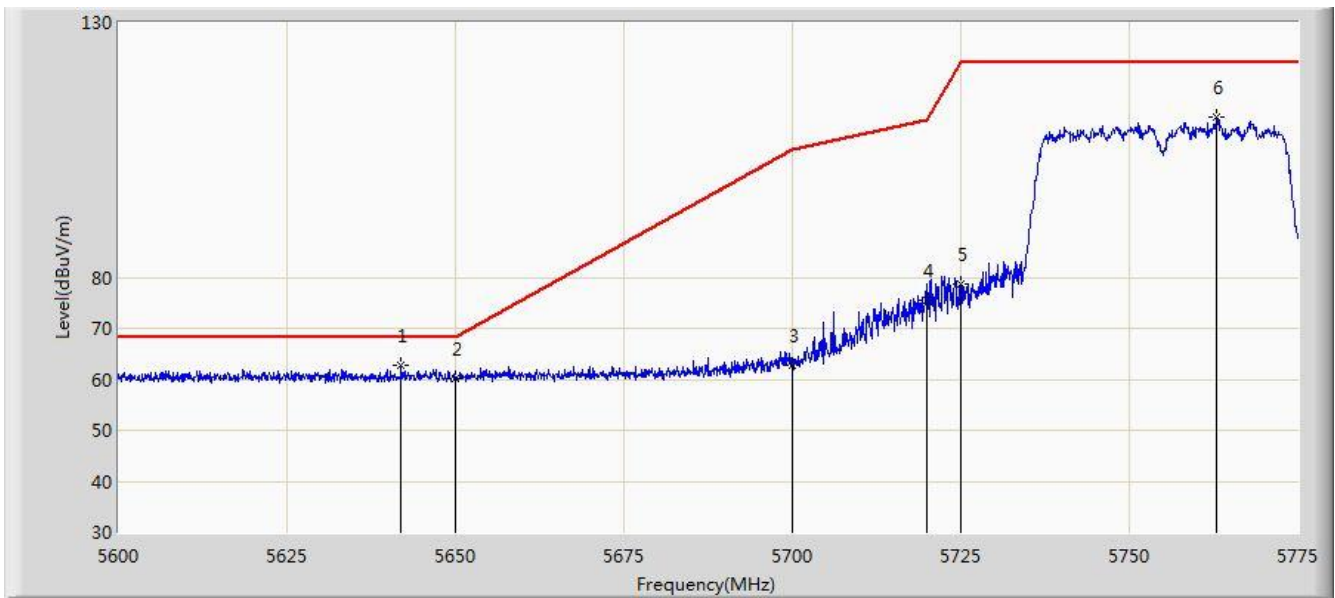


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5641.913	62.638	57.994	-5.562	68.200	4.644	PK
2			5650.000	60.281	55.610	-7.919	68.200	4.671	PK
3			5700.000	62.817	57.939	-42.383	105.200	4.878	PK
4			5720.000	75.515	70.518	-35.285	110.800	4.997	PK
5			5725.000	78.659	73.630	-43.541	122.200	5.029	PK
6			5762.925	111.305	106.050	N/A	N/A	5.255	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 21:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 5795MHz (CDD Mode)	

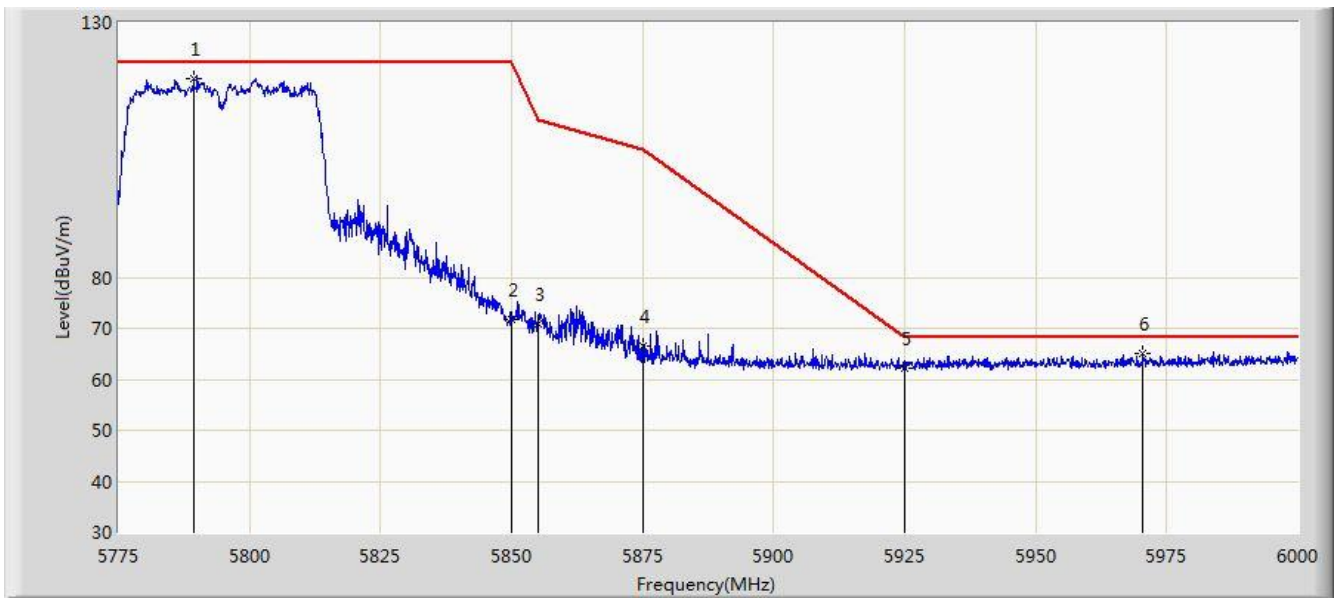


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5789.400	119.011	113.622	N/A	N/A	5.388	PK
2			5850.000	71.734	66.008	-50.466	122.200	5.726	PK
3			5855.000	70.999	65.253	-39.801	110.800	5.746	PK
4			5875.000	66.492	60.672	-38.708	105.200	5.820	PK
5			5925.000	62.231	56.265	-5.969	68.200	5.967	PK
6			5970.525	64.987	58.925	-3.213	68.200	6.062	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 21:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11n-HT40 at Channel 5795MHz (CDD Mode)	

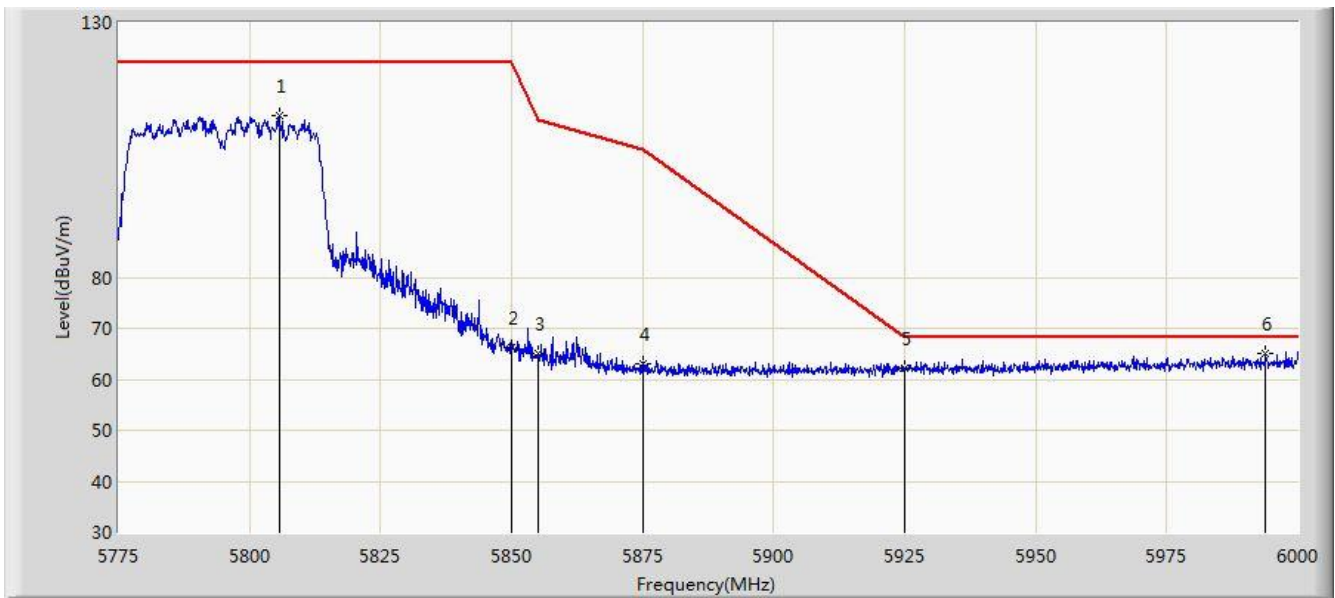


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5805.600	111.615	106.139	N/A	N/A	5.476	PK
2			5850.000	66.276	60.550	-55.924	122.200	5.726	PK
3			5855.000	65.017	59.271	-45.783	110.800	5.746	PK
4			5875.000	63.116	57.296	-42.084	105.200	5.820	PK
5			5925.000	62.193	56.227	-6.007	68.200	5.967	PK
6		*	5993.925	64.958	58.858	-3.242	68.200	6.101	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 21:46
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 5180MHz (CDD Mode)	

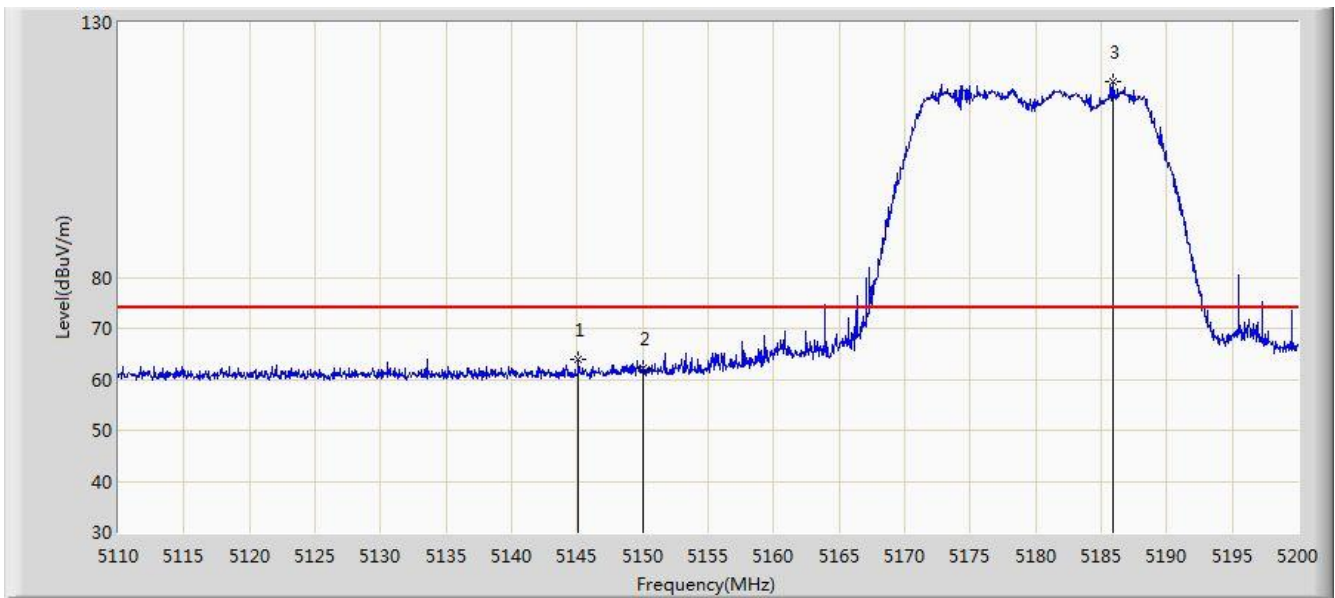


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.100	63.987	59.811	-10.013	74.000	4.176	PK
2			5150.000	62.059	57.890	-11.941	74.000	4.170	PK
3		*	5185.870	118.345	114.297	N/A	N/A	4.049	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 21:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 5180MHz (CDD Mode)	

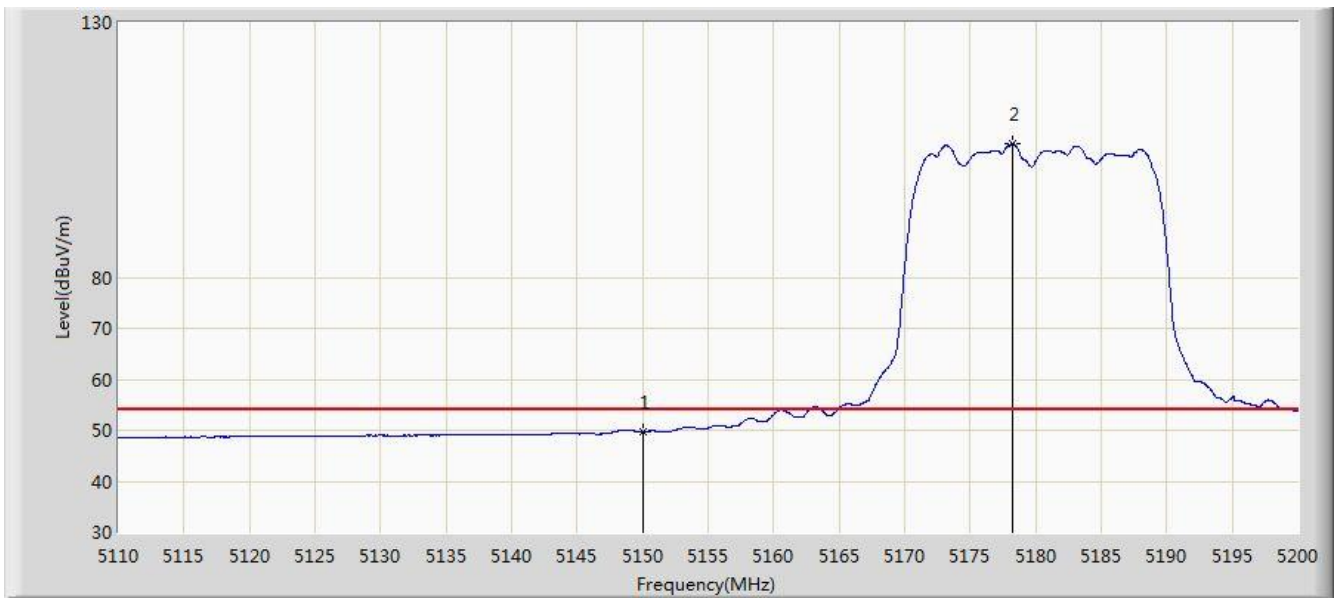


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.721	45.552	-4.279	54.000	4.170	AV
2		*	5178.265	106.115	102.040	N/A	N/A	4.075	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 21:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 5180MHz (CDD Mode)	

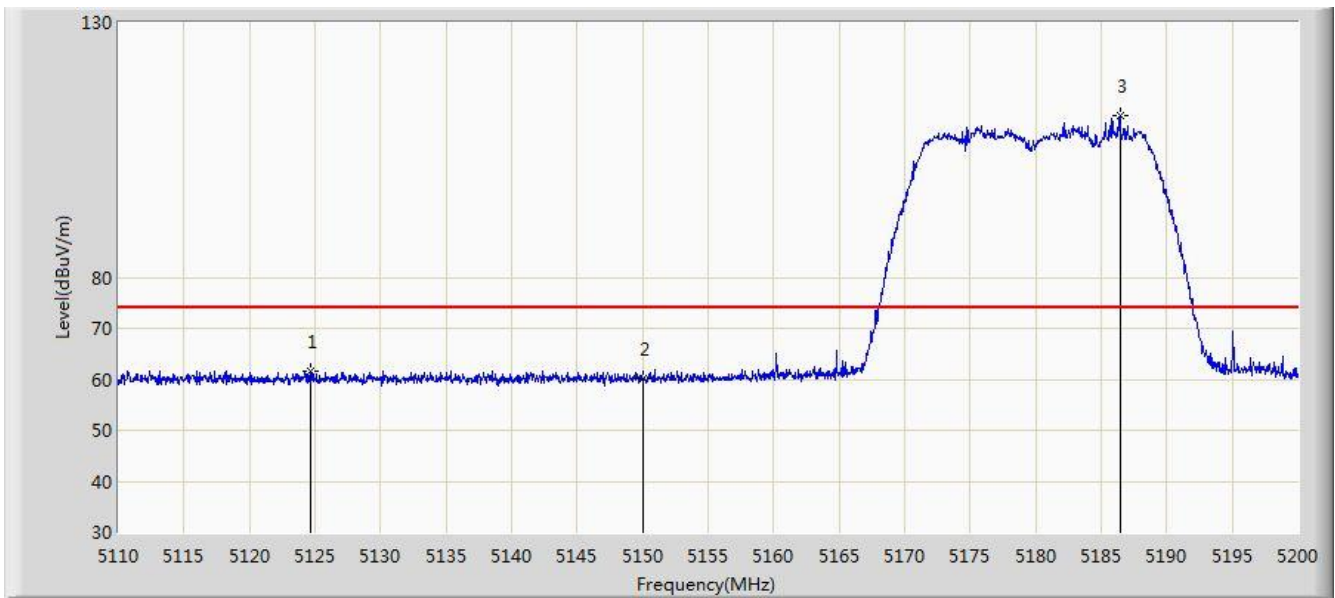


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5124.715	61.529	57.354	-12.471	74.000	4.175	PK
2			5150.000	60.283	56.114	-13.717	74.000	4.170	PK
3		*	5186.410	111.850	107.804	N/A	N/A	4.046	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 21:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 5180MHz (CDD Mode)	

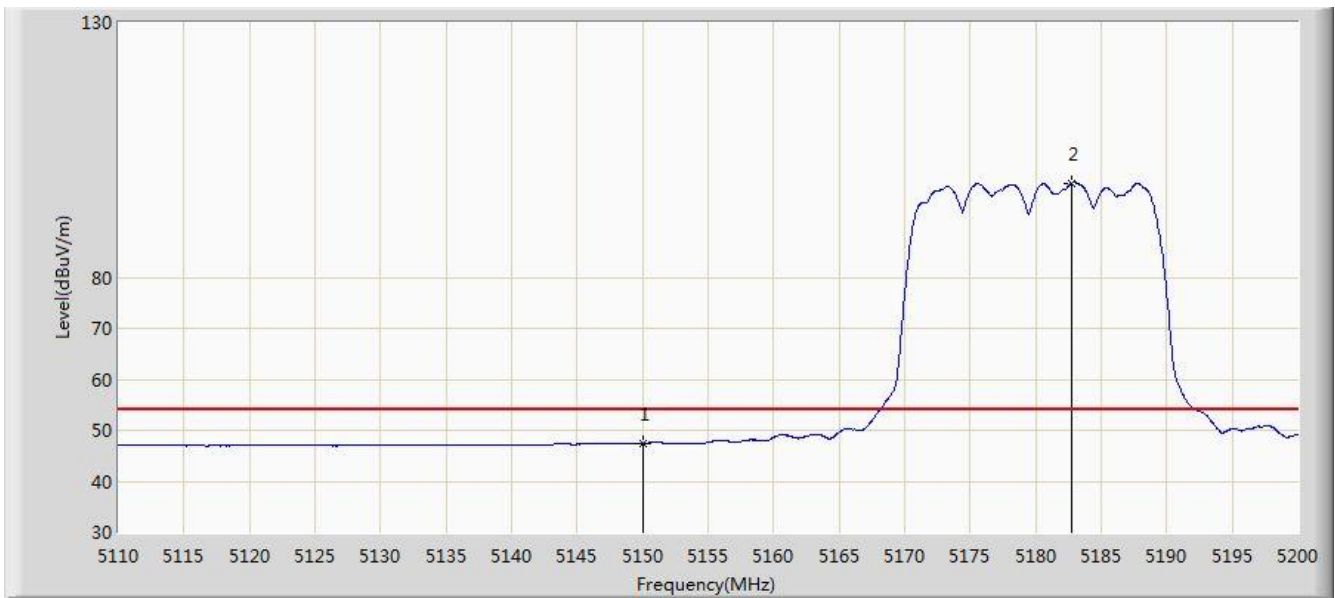


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.382	43.213	-6.618	54.000	4.170	AV
2		*	5182.765	98.515	94.456	N/A	N/A	4.059	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 21:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 5320MHz (CDD Mode)	

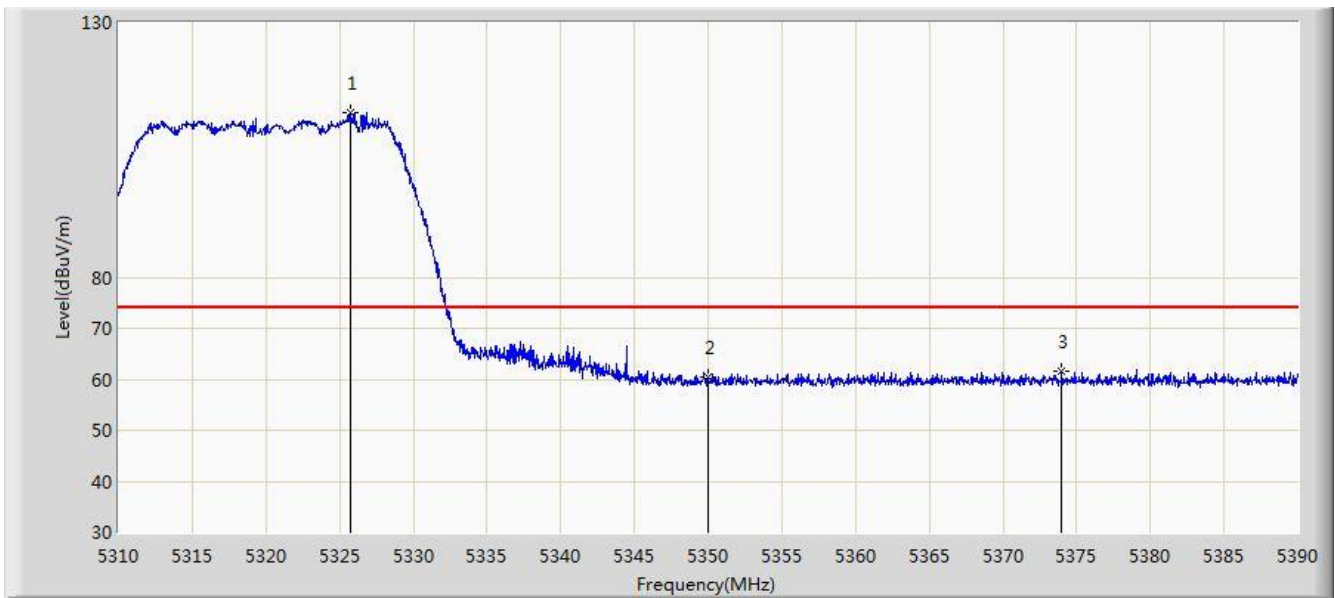


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5325.720	112.226	108.367	N/A	N/A	3.859	PK
2			5350.000	60.489	56.584	-13.511	74.000	3.904	PK
3			5374.000	61.588	57.640	-12.412	74.000	3.948	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 22:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 5320MHz (CDD Mode)	

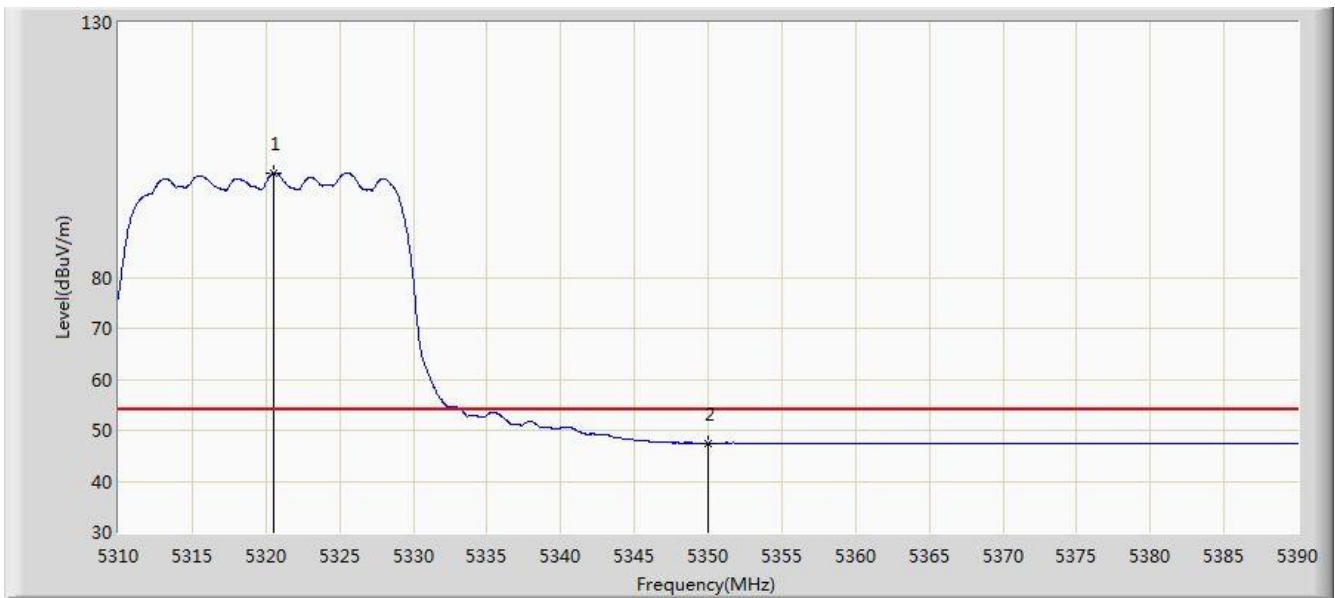


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5320.480	100.370	96.521	N/A	N/A	3.850	AV
2			5350.000	47.463	43.558	-6.537	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 22:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 5320MHz (CDD Mode)	

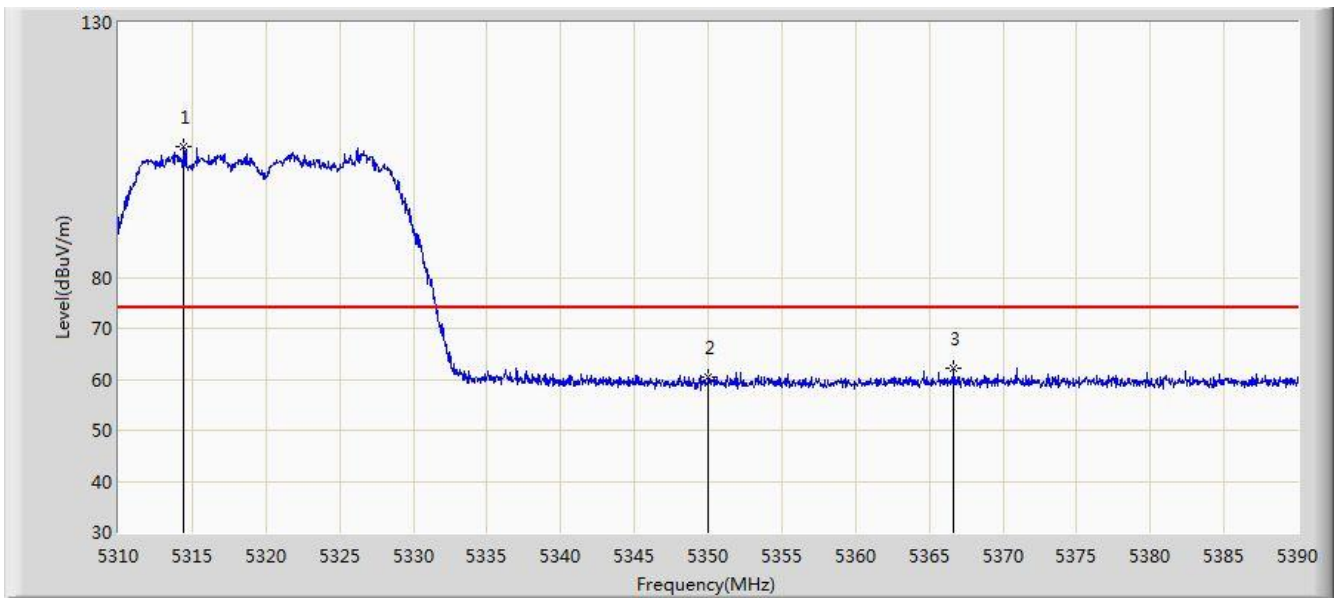


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.440	105.714	101.876	N/A	N/A	3.838	PK
2			5350.000	60.569	56.664	-13.431	74.000	3.904	PK
3			5366.680	62.161	58.226	-11.839	74.000	3.935	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 22:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 5320MHz (CDD Mode)	

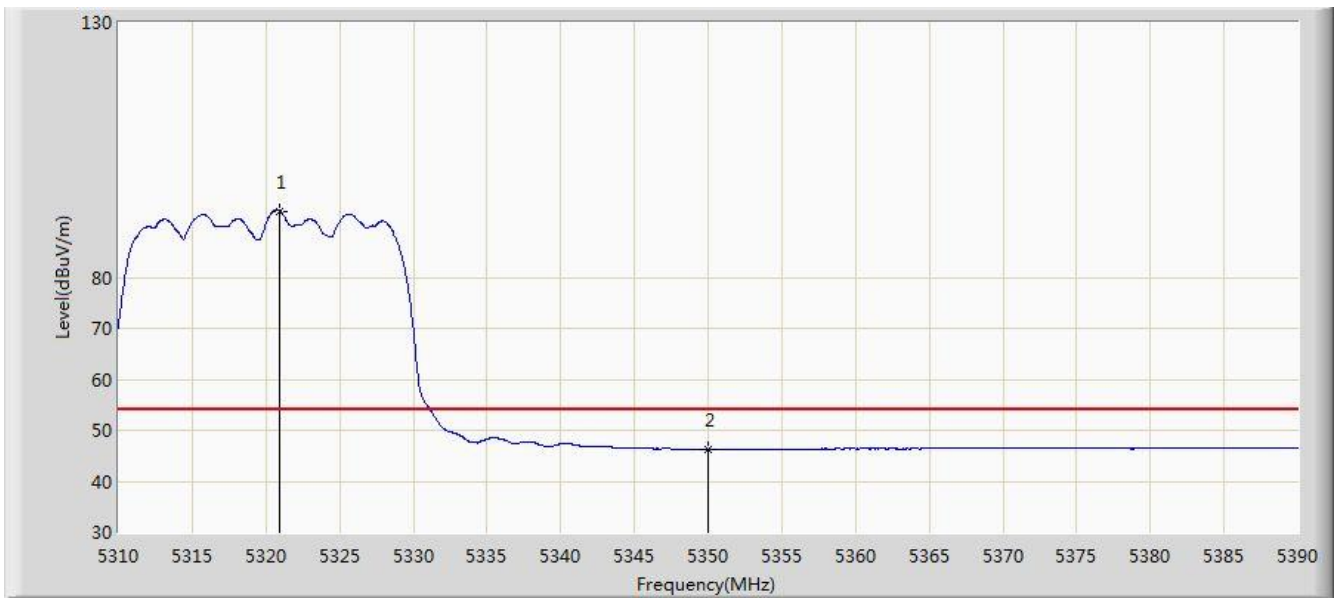


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5320.920	92.937	89.087	N/A	N/A	3.850	AV
2			5350.000	46.287	42.382	-7.713	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 22:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 5500MHz (CDD Mode)	

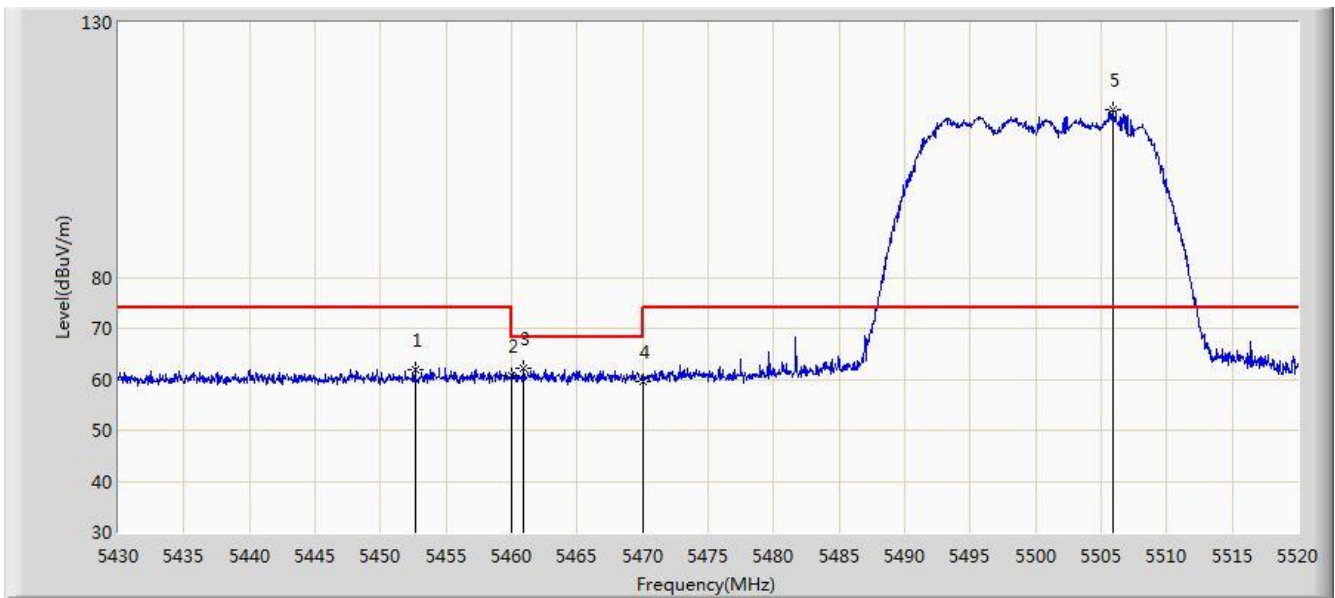


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.680	62.023	57.860	-11.977	74.000	4.163	PK
2			5460.000	60.785	56.605	-13.215	74.000	4.180	PK
3			5460.915	62.170	57.988	-6.030	68.200	4.183	PK
4			5470.000	59.563	55.361	-8.637	68.200	4.202	PK
5		*	5505.870	112.935	108.646	N/A	N/A	4.289	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 22:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 5500MHz (CDD Mode)	

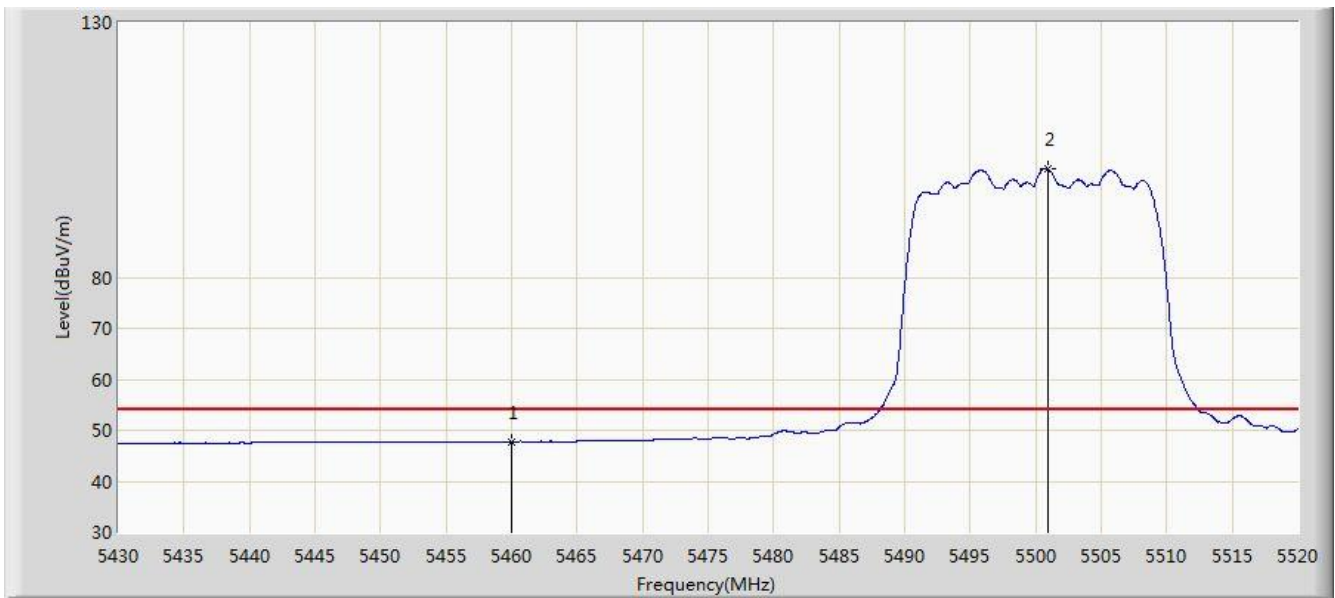


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.737	43.557	-6.263	54.000	4.180	AV
2		*	5500.920	101.277	97.002	N/A	N/A	4.275	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 22:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 5500MHz (CDD Mode)	

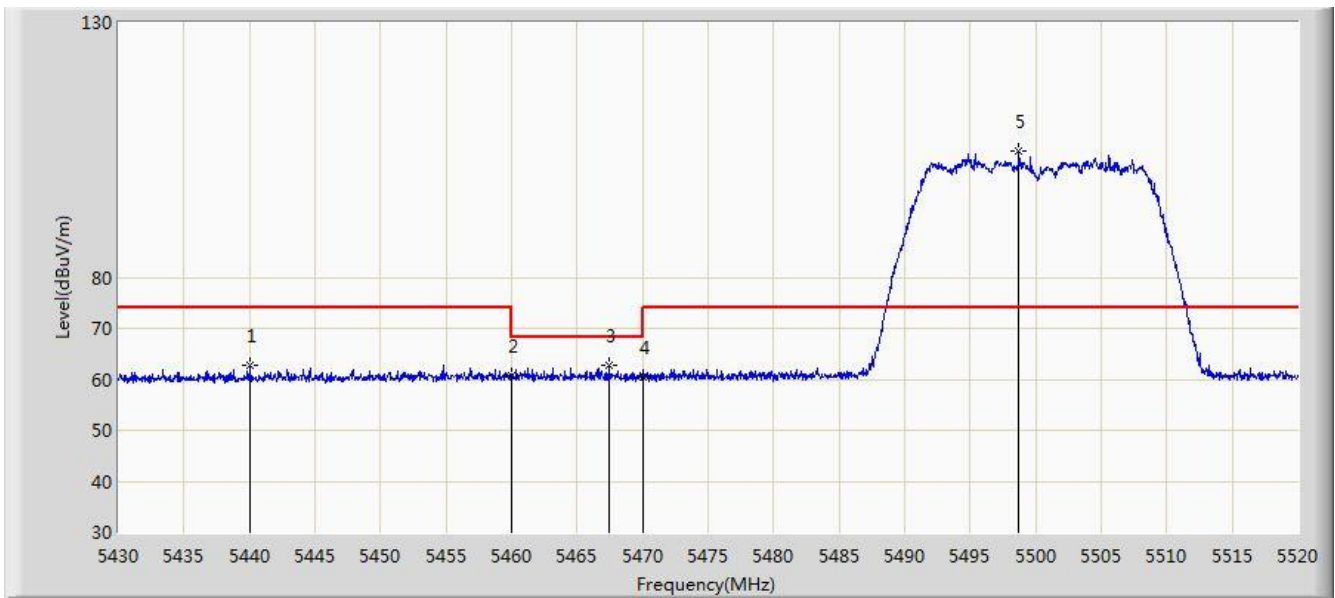


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5440.035	62.806	58.681	-11.194	74.000	4.124	PK
2			5460.000	60.869	56.689	-13.131	74.000	4.180	PK
3			5467.440	62.751	58.554	-5.449	68.200	4.196	PK
4			5470.000	60.526	56.324	-7.674	68.200	4.202	PK
5		*	5498.715	104.747	100.479	N/A	N/A	4.268	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 22:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 5500MHz (CDD Mode)	

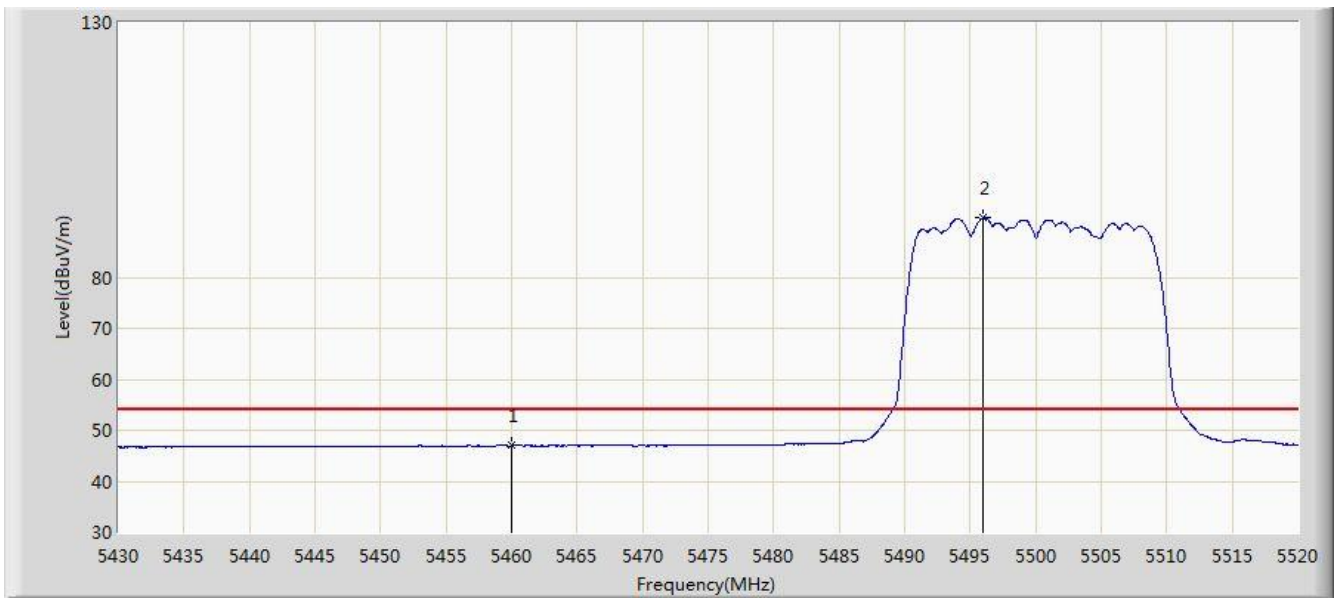


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.957	42.777	-7.043	54.000	4.180	AV
2		*	5496.015	91.646	87.385	N/A	N/A	4.261	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 22:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 5700MHz (CDD Mode)	

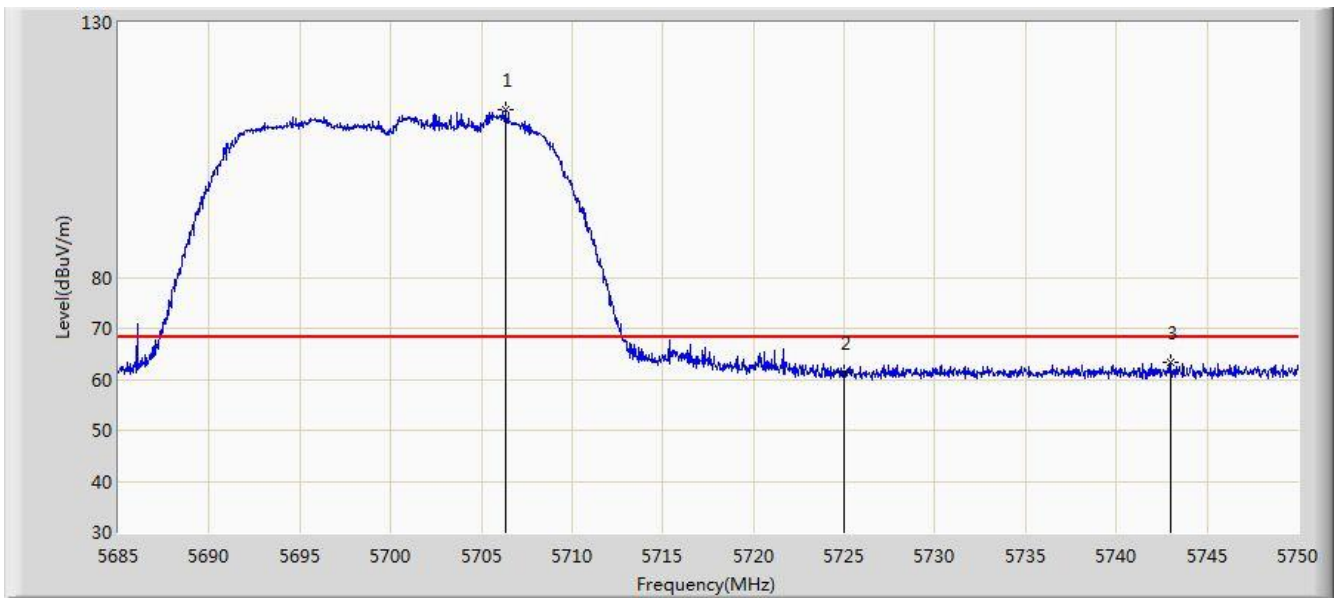


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5706.320	112.983	108.071	N/A	N/A	4.912	PK
2			5725.000	61.271	56.242	-6.929	68.200	5.029	PK
3			5742.980	63.268	58.124	-4.932	68.200	5.144	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 22:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 5700MHz (CDD Mode)	

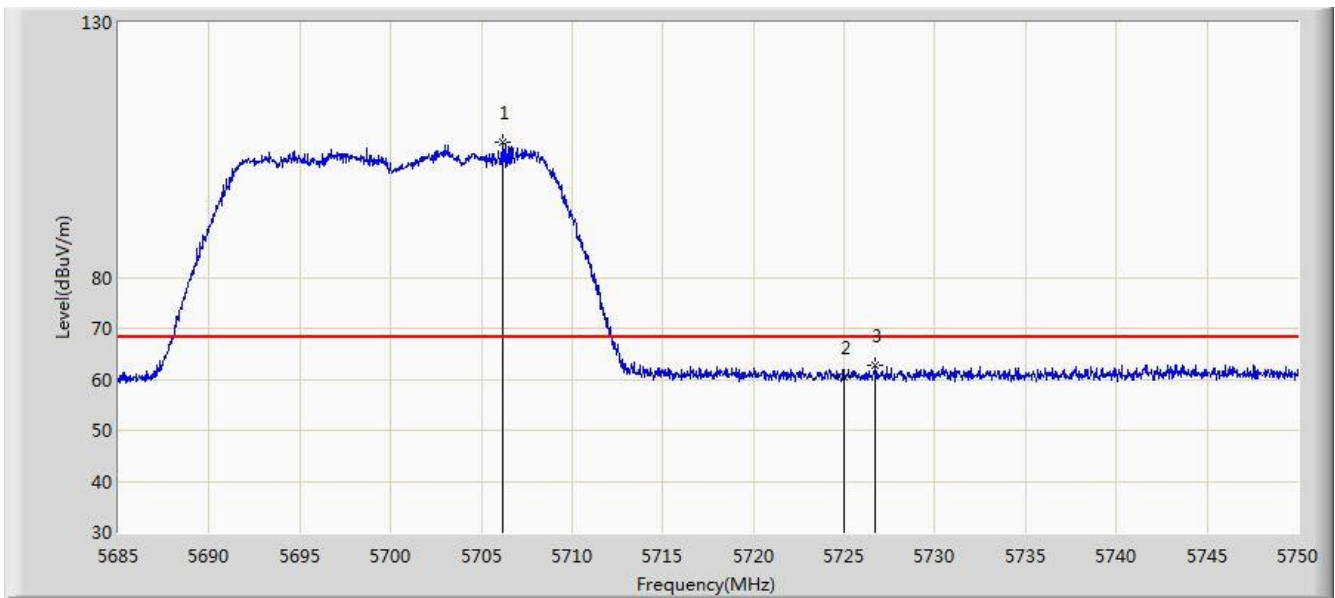


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5706.158	106.521	101.610	N/A	N/A	4.911	PK
2			5725.000	60.464	55.435	-7.736	68.200	5.029	PK
3			5726.730	62.698	57.658	-5.502	68.200	5.040	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 22:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 5745MHz (CDD Mode)	

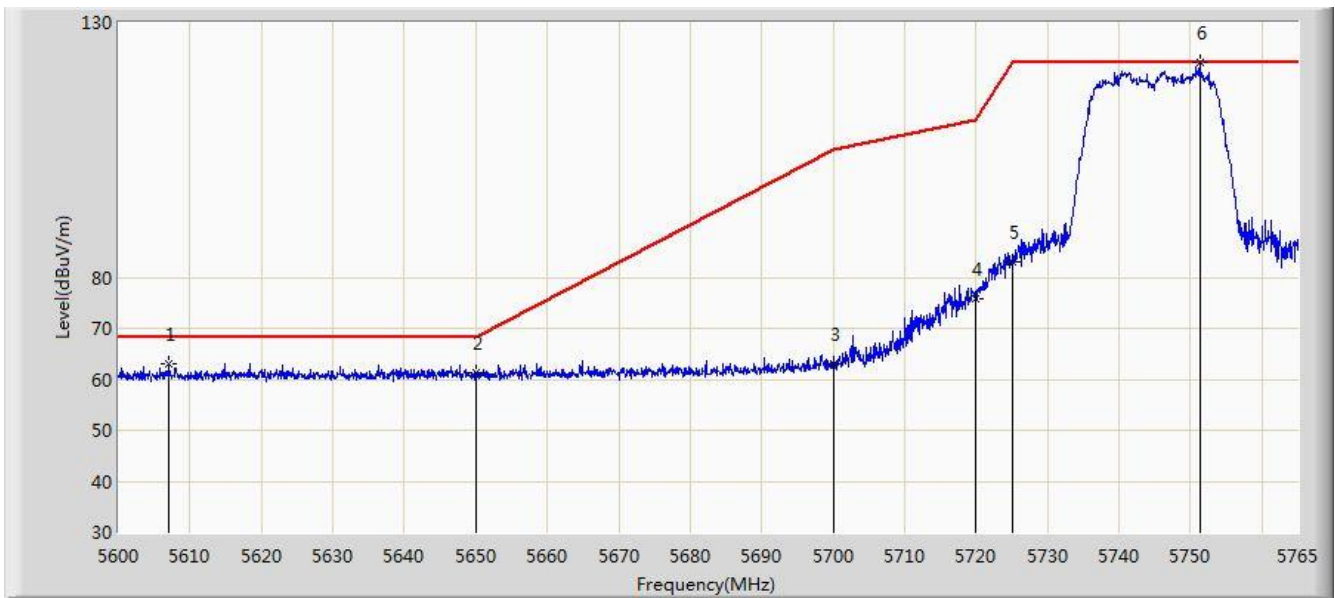


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5607.095	63.114	58.571	-5.086	68.200	4.544	PK
2			5650.000	61.369	56.698	-6.831	68.200	4.671	PK
3			5700.000	63.072	58.194	-42.128	105.200	4.878	PK
4			5720.000	75.789	70.792	-35.011	110.800	4.997	PK
5			5725.000	82.919	77.890	-39.281	122.200	5.029	PK
6		*	5751.305	122.074	116.883	N/A	N/A	5.191	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 22:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 5745MHz (CDD Mode)	

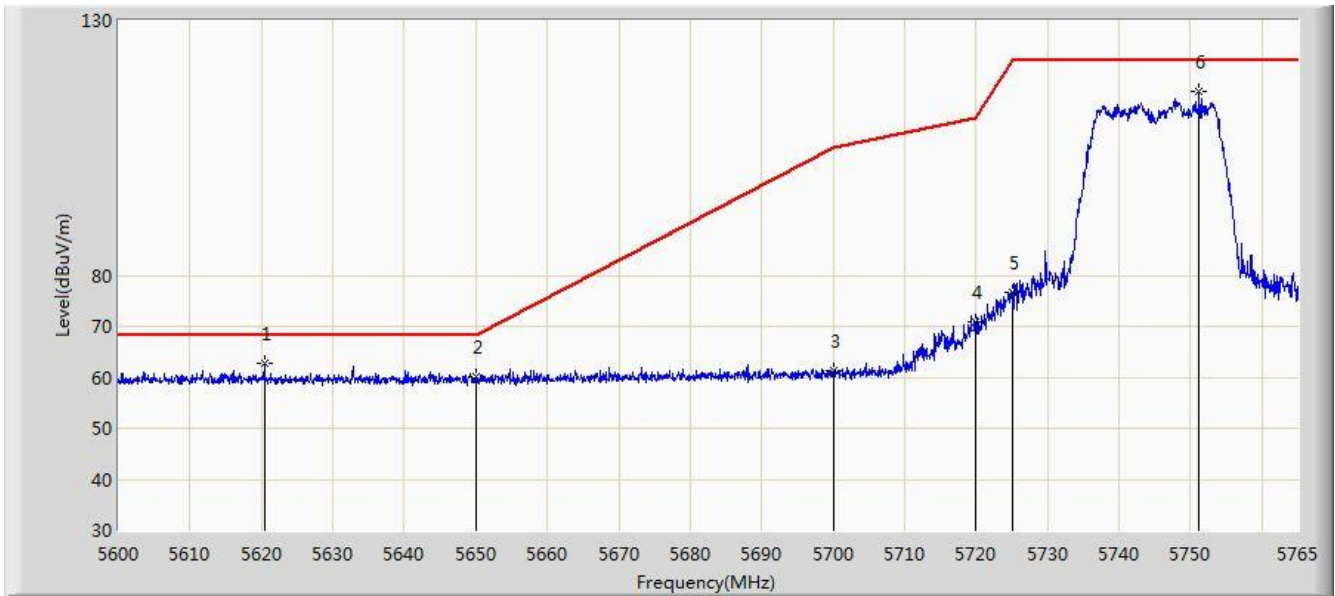


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5620.377	62.653	58.071	-5.547	68.200	4.581	PK
2			5650.000	60.204	55.533	-7.996	68.200	4.671	PK
3			5700.000	61.291	56.413	-43.909	105.200	4.878	PK
4			5720.000	70.811	65.814	-39.989	110.800	4.997	PK
5			5725.000	76.563	71.534	-45.637	122.200	5.029	PK
6			5751.223	115.958	110.768	N/A	N/A	5.191	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 22:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 5825MHz (CDD Mode)	

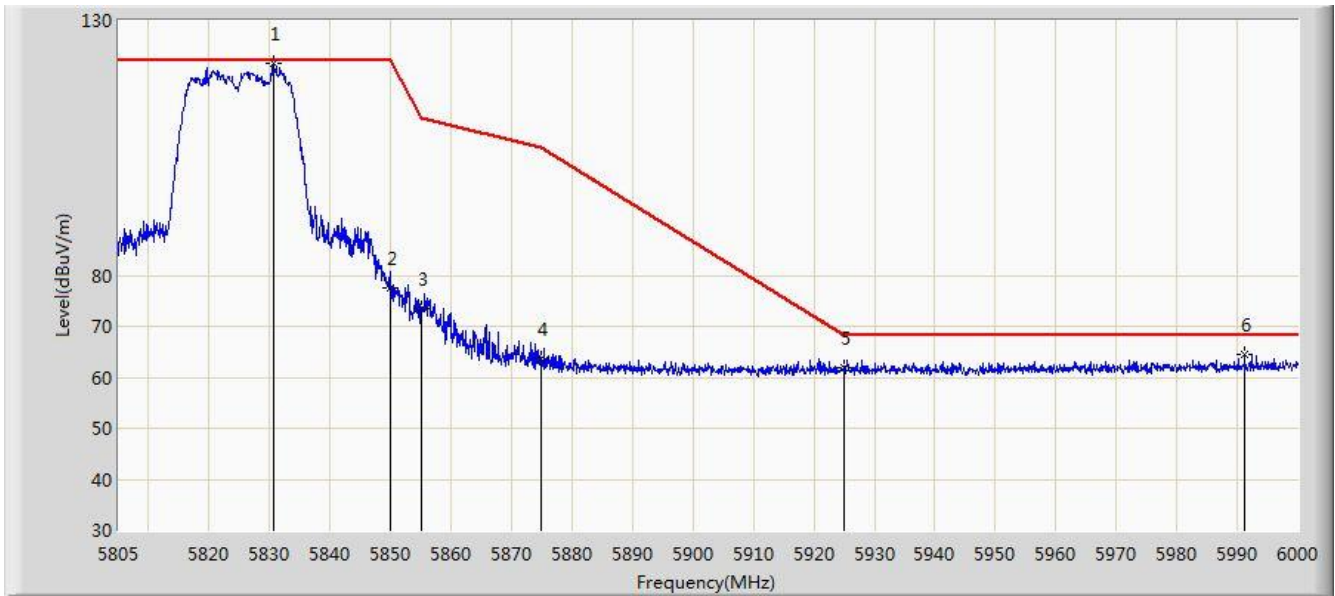

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5830.545	121.578	115.958	N/A	N/A	5.621	PK
2			5850.000	77.418	71.692	-44.782	122.200	5.726	PK
3			5855.000	73.472	67.726	-37.328	110.800	5.746	PK
4			5875.000	63.756	57.936	-41.444	105.200	5.820	PK
5			5925.000	61.875	55.909	-6.325	68.200	5.967	PK
6			5991.225	64.587	58.491	-3.613	68.200	6.096	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).