






11AX80SISO_Ant1_5290

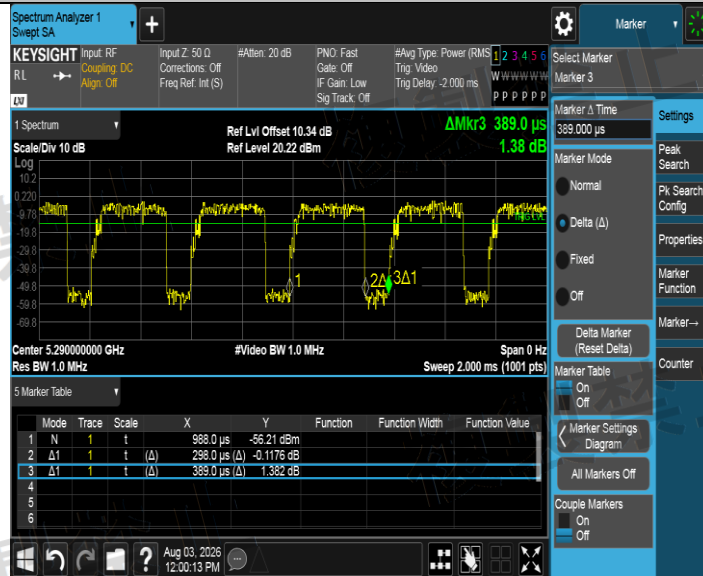

11AX80SISO_Ant1_5530

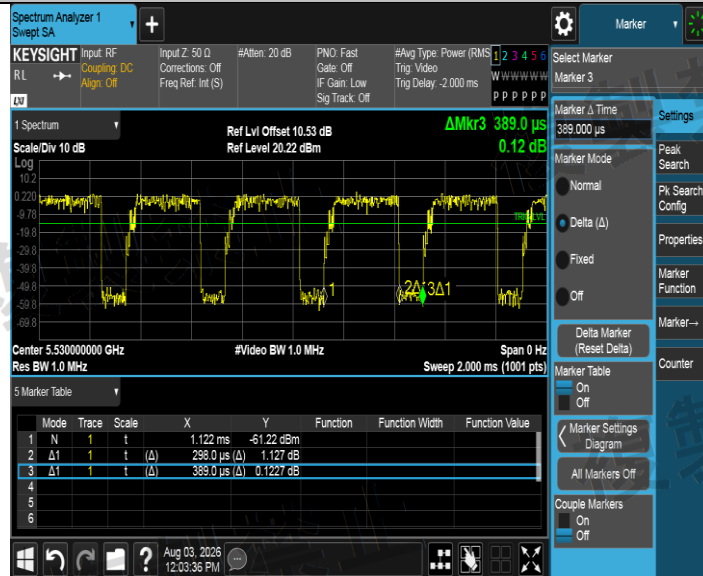

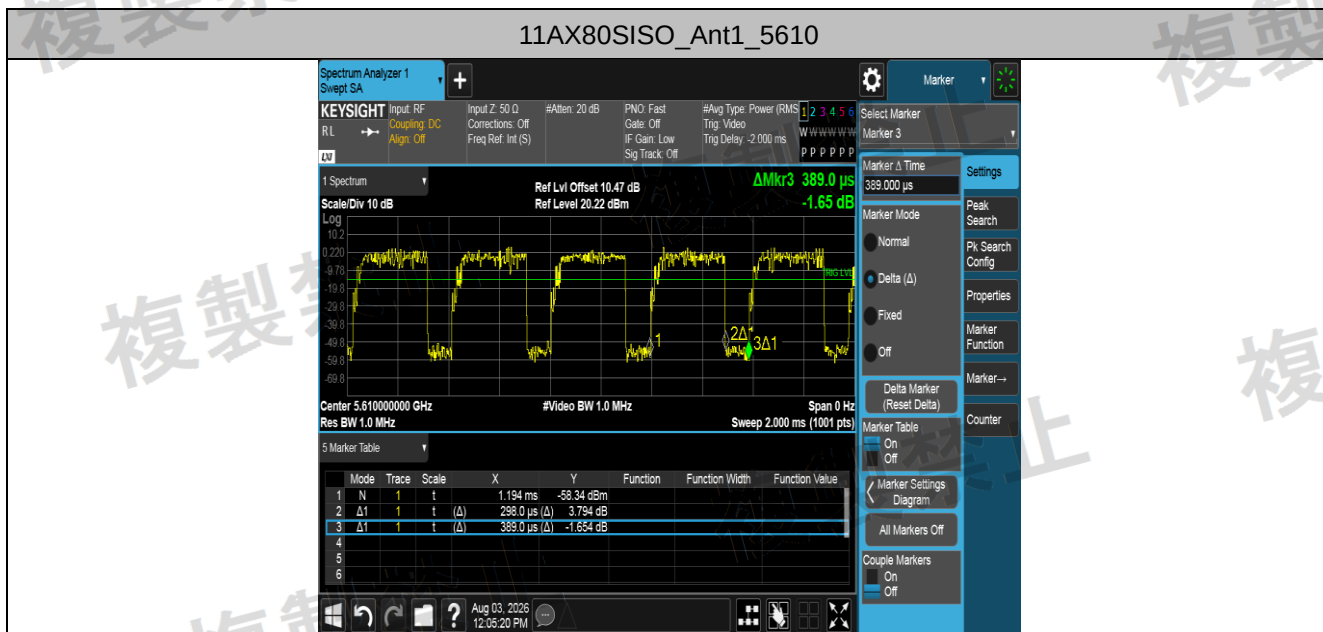


14. Radio Interference Prevention Capability Measurement

14.1. Limit

Item	Limits
Identification code	≥48 bits

14.2. Test Setup

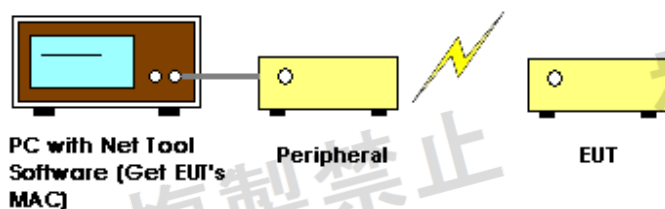

14.3. Test Procedure

In the case that the EUT has the function of automatically transmitting the identification code: Transmit the predetermined identification codes form EUT. Check the transmitted identification codes with the demodulator.

In the case of receiving the identification code: Transmit the predetermined identification codes form the counterpart. Check if communication is normal. Transmit the signals other than predetermined ID codes form the counterpart. Check if the EUT stops the transmission, or if it displays that identification codes are different from the predetermined ones.

14.4. Test Result

Test environment:

Temperature:	23.1~27.5 °C
Relative Humidity:	46~51 %
ATM Pressure:	100.2~101.5 kPa
Test Date (yy-mm-dd):	2026-07-22~2026-08-04
Test Voltage:	DC 13.5V
Test Engineer:	Stone Zhang

Test Mode	EUT normal working
Test Result	Good (identification code: ec:a7:ad:f7:46:65)

15. Carrier Sense Capability

15.1. Limit

Item	Limits
Carrier Sense Capability	Good – EUT stop RF transmission signal after carrier inject to EUT. (On $22.79 + Gr - 20 \cdot \log(f)$ [dBm] (Gr: dBi; f: MHz) or 100mV/m)

15.2. Test Setup



15.3. Test Procedure

1. EUT have transmitted the maximum modulation signal and fixed channelize.
2. Setting of SA is following as: RBW:1MHz / VBW:1MHz / SPAN: 0MHz / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak.

15.4. Test Result

Test environment:

Temperature:	23.1~27.5 °C
Relative Humidity:	46~51 %
ATM Pressure:	100.2~101.5 kPa
Test Date (yy-mm-dd):	2026-07-22~2026-08-04
Test Voltage:	DC 13.5V
Test Engineer:	Stone Zhang

Test Mode	Frequency (MHz)	Pcs[dBm]	Result	Verdict
802.11a	5180	-48.36	Good	PASS
	5200	-48.39	Good	PASS
	5240	-48.46	Good	PASS
	5260	-47.50	Good	PASS
	5280	-47.53	Good	PASS
	5320	-47.60	Good	PASS
	5500	-47.60	Good	PASS
	5600	-47.75	Good	PASS
	5700	-47.91	Good	PASS

Note: Pcs = 22.79+Gr-20*log(freq_MHz)[dBm]

Test Mode	Frequency (MHz)	Pcs[dBm]	Result	Verdict
802.11n-HT20	5180	-48.36	Good	PASS
	5200	-48.39	Good	PASS
	5240	-48.46	Good	PASS
	5260	-47.50	Good	PASS
	5280	-47.53	Good	PASS
	5320	-47.60	Good	PASS
	5500	-47.60	Good	PASS
	5600	-47.75	Good	PASS
	5700	-47.91	Good	PASS

Note: Pcs = 22.79+Gr-20*log(freq_MHz)[dBm]

Test Mode	Frequency (MHz)	Pcs[dBm]	Result	Verdict
802.11n-HT40	5190	-48.37	Good	PASS
	5230	-48.44	Good	PASS
	5270	-47.52	Good	PASS
	5310	-47.58	Good	PASS
	5510	-47.61	Good	PASS
	5590	-47.74	Good	PASS
	5670	-47.86	Good	PASS

Note: Pcs = 22.79+Gr-20*log(freq_MHz)[dBm]



Test Mode	Frequency (MHz)	Pcs[dBm]	Result	Verdict
802.11ac-VHT20	5180	-48.36	Good	PASS
	5200	-48.39	Good	PASS
	5240	-48.46	Good	PASS
	5260	-47.50	Good	PASS
	5280	-47.53	Good	PASS
	5320	-47.60	Good	PASS
	5500	-47.60	Good	PASS
	5600	-47.75	Good	PASS
	5700	-47.91	Good	PASS

Note: Pcs = $22.79 + Gr - 20 \cdot \log(\text{freq_MHz})$ [dBm]

Test Mode	Frequency (MHz)	Pcs[dBm]	Result	Verdict
802.11ac-VHT40	5190	-48.37	Good	PASS
	5230	-48.44	Good	PASS
	5270	-47.52	Good	PASS
	5310	-47.58	Good	PASS
	5510	-47.61	Good	PASS
	5590	-47.74	Good	PASS
	5670	-47.86	Good	PASS

Note: Pcs = $22.79 + Gr - 20 \cdot \log(\text{freq_MHz})$ [dBm]

Test Mode	Frequency (MHz)	Pcs[dBm]	Result	Verdict
802.11ac-VHT80	5210	-48.41	Good	PASS
	5290	-47.55	Good	PASS
	5530	-47.64	Good	PASS
	5610	-47.77	Good	PASS

Note: Pcs = $22.79 + Gr - 20 \cdot \log(\text{freq_MHz})$ [dBm]



Test Mode	Frequency (MHz)	Pcs[dBm]	Result	Verdict
802.11ax-HE20	5180	-48.36	Good	PASS
	5200	-48.39	Good	PASS
	5240	-48.46	Good	PASS
	5260	-47.50	Good	PASS
	5280	-47.53	Good	PASS
	5320	-47.60	Good	PASS
	5500	-47.60	Good	PASS
	5600	-47.75	Good	PASS
	5700	-47.91	Good	PASS

Note: Pcs = $22.79 + Gr - 20 \cdot \log(\text{freq_MHz})$ [dBm]

Test Mode	Frequency (MHz)	Pcs[dBm]	Result	Verdict
802.11ax-HE40	5190	-48.37	Good	PASS
	5230	-48.44	Good	PASS
	5270	-47.52	Good	PASS
	5310	-47.58	Good	PASS
	5510	-47.61	Good	PASS
	5590	-47.74	Good	PASS
	5670	-47.86	Good	PASS

Note: Pcs = $22.79 + Gr - 20 \cdot \log(\text{freq_MHz})$ [dBm]

Test Mode	Frequency (MHz)	Pcs[dBm]	Result	Verdict
802.11ax-HE80	5210	-48.41	Good	PASS
	5290	-47.55	Good	PASS
	5530	-47.64	Good	PASS
	5610	-47.77	Good	PASS

Note: Pcs = $22.79 + Gr - 20 \cdot \log(\text{freq_MHz})$ [dBm]

16. Dynamic frequency selection

16.1. Requirement


(W53) (W56): Slave Station (Controlled by Master)

It has the following functions.


Chooses the frequency which transmits automatically by the control from a "master station".

Transmission and a stop of a radio wave are performed by the control from a "master station".

16.2. Test Setup

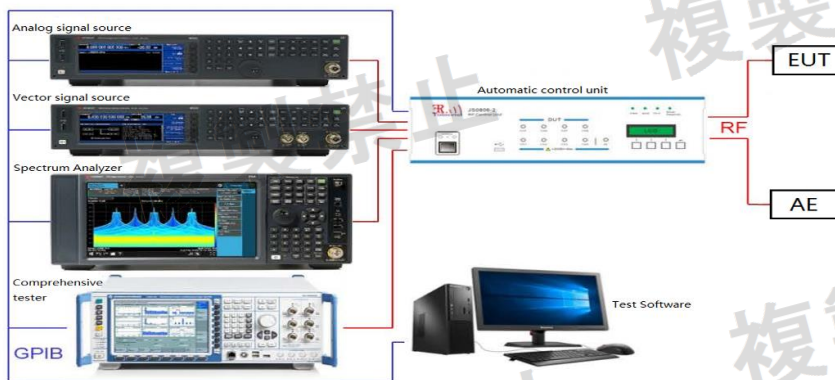

16.3. Test Result

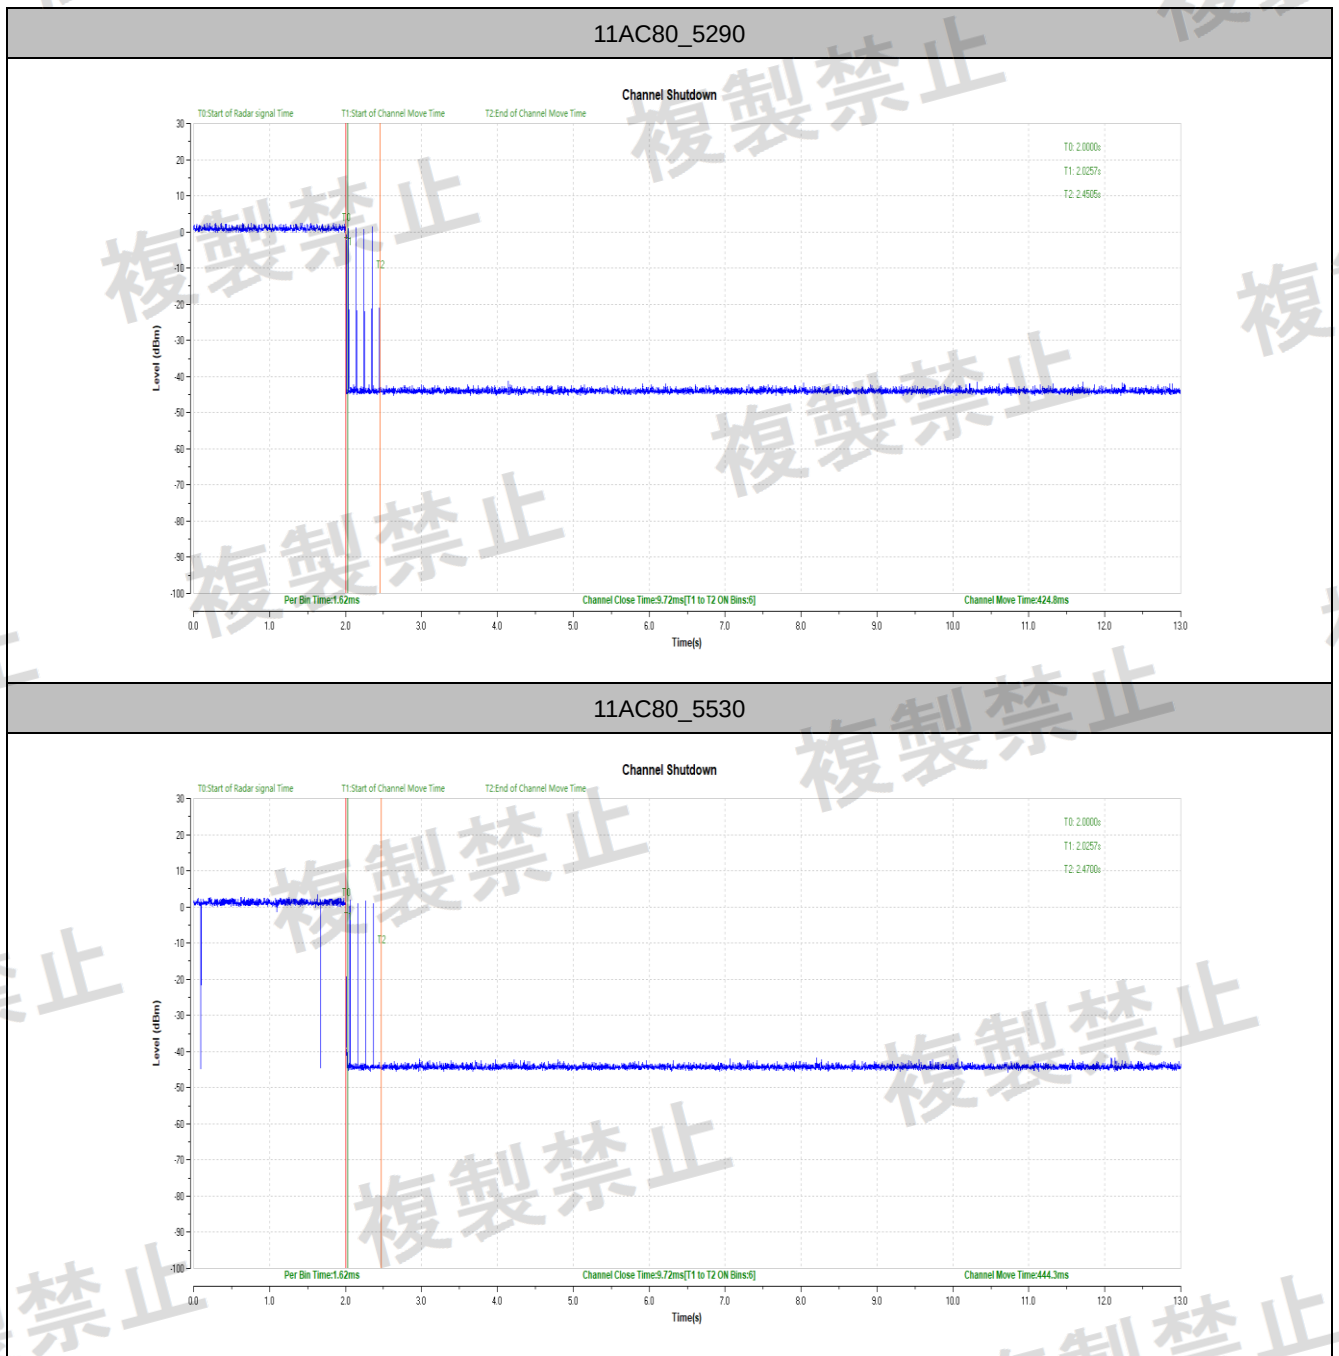

17. Construction Protection Confirmation Method


17.1. Limit

(See Article 49-20, Item1-a of the Ordinance Regulating Radio Equipment) The high-frequency section and modulation section of the radio equipment except for the antenna system shall not be capable of being opened easily.


17.2. Confirmation Method

The RF and modulation portions are protected against illegal modification as following method:

Tick the appropriate box	
	1). Sealed with special screws.
	2). Plastic chassis is being welded using ultrasonic waves.
	3). Chassis is glued using a special adhesive.
	4). Metal covers are spot-fused.
	5). Cover is specially interlocked.
☒	6). RF and Modulation components are covered with shielding case and this shielding case is soldered.
	7). Shield case is welded at RF and modulation parts, and ID-ROM is welded using the BGA Method.
	8). Shield case is welded at RF and modulation parts, and ID-ROM is glued at its lead with a special adhesive
	9). Shield case is welded at RF and modulation parts, and ID-ROM is glued with a non-transparent laminating agent.
	10). RF and Modulation parts are mounted on PCB with surface mount technology, and there is no any adjustable part on PCB or adjustable parts are not exposed.

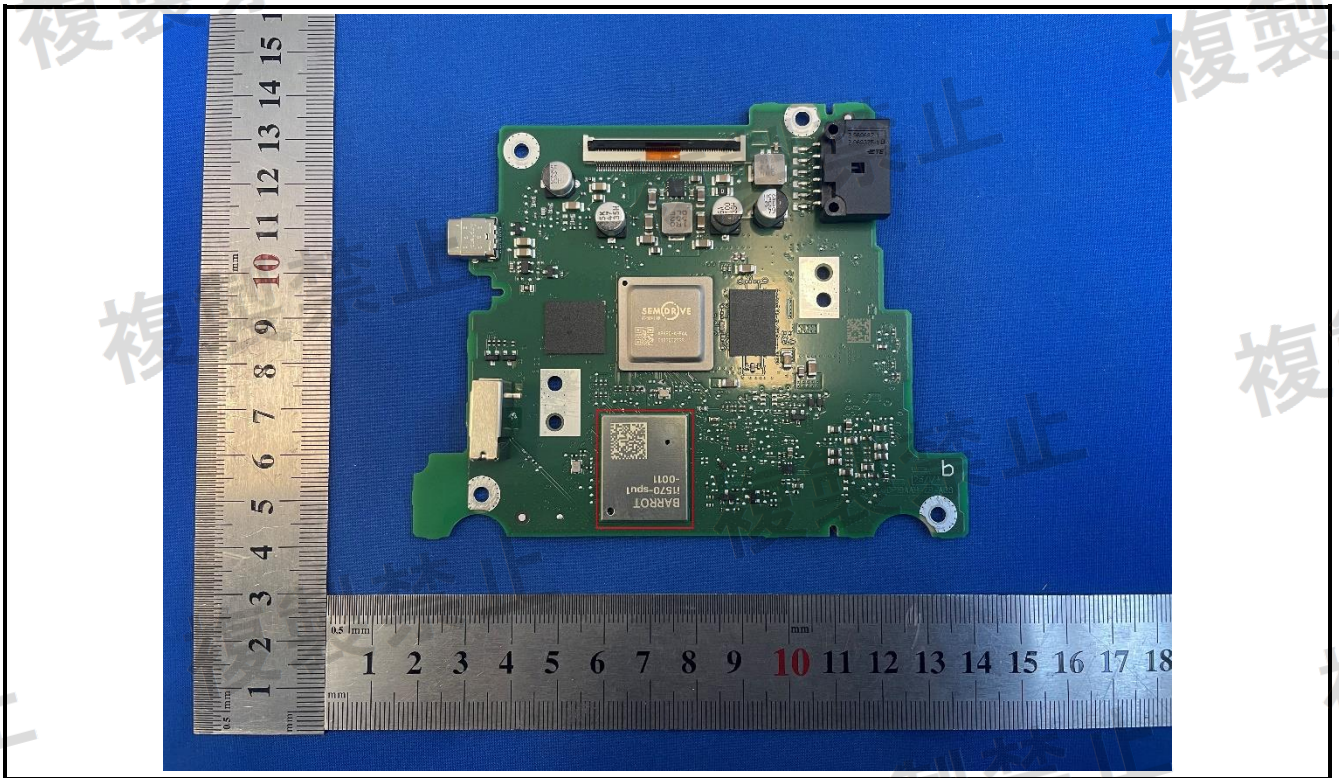

18. Photograph of The Test Connection Diagram

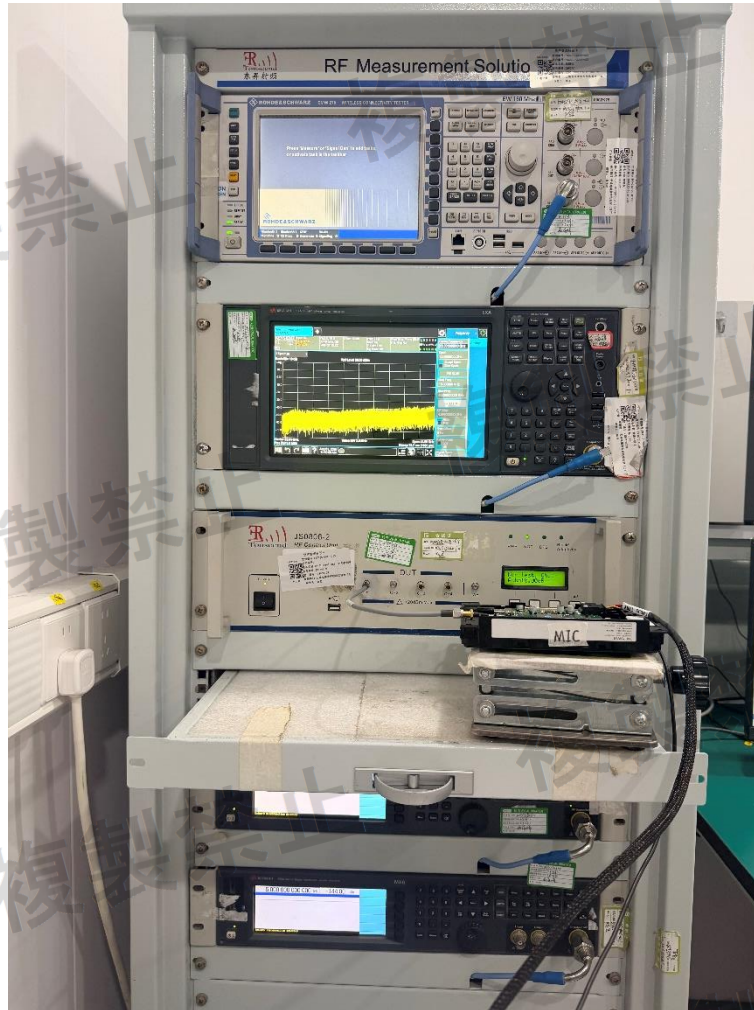

19. Appendix - EUT Photograph



Photo 1: The whole product view

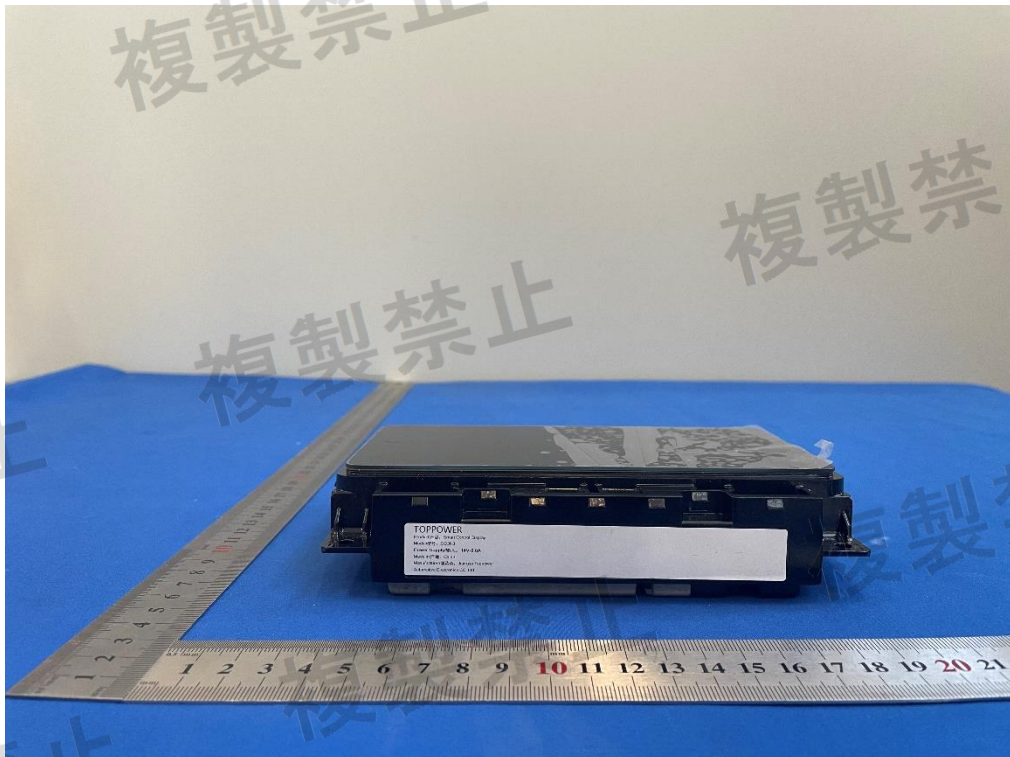


Photo 2: The whole product view

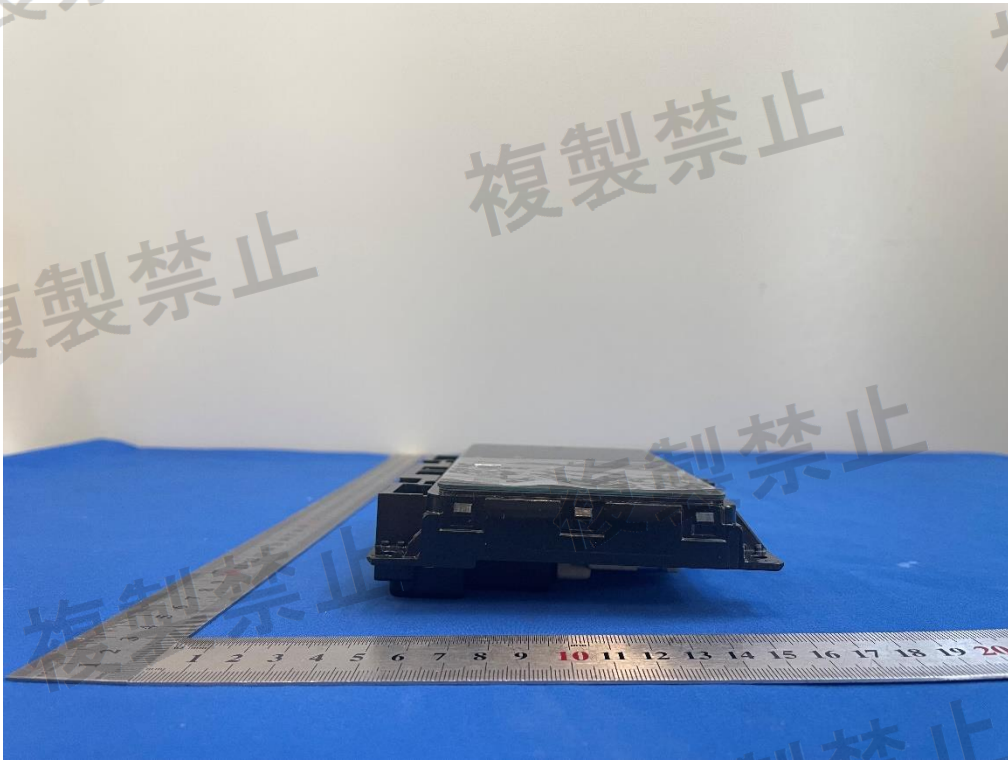


Photo 3: The whole product view

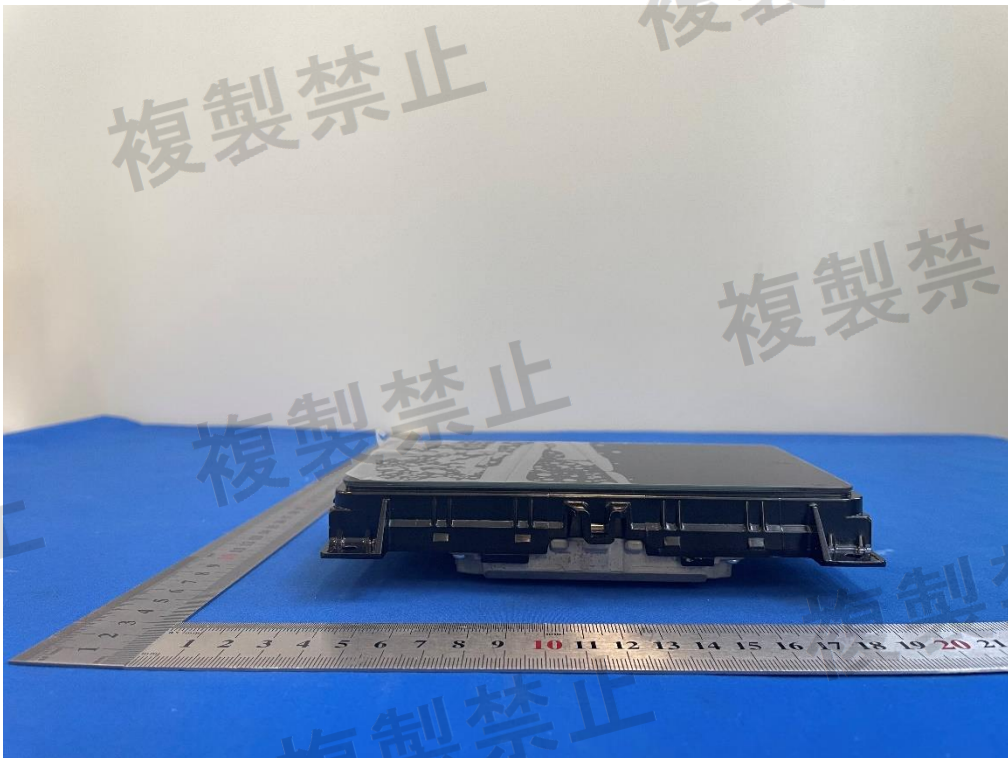


Photo 4: The whole product view

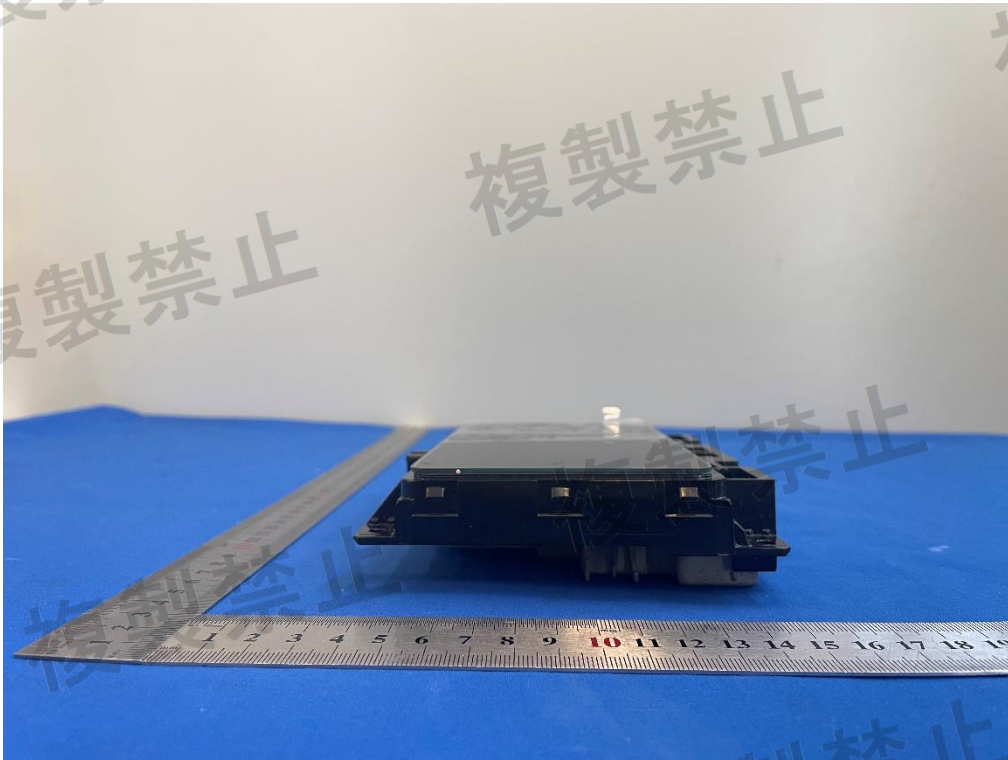


Photo 5: The whole product view



Photo 6: The whole product view

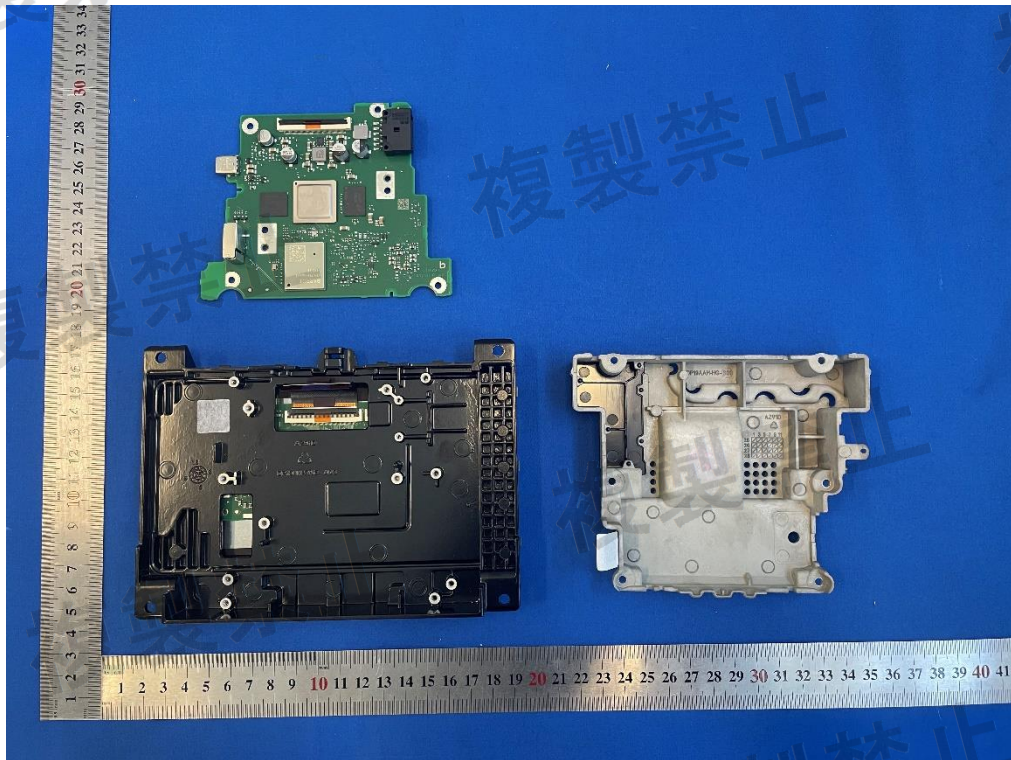


Photo 7: Internal View for PCB

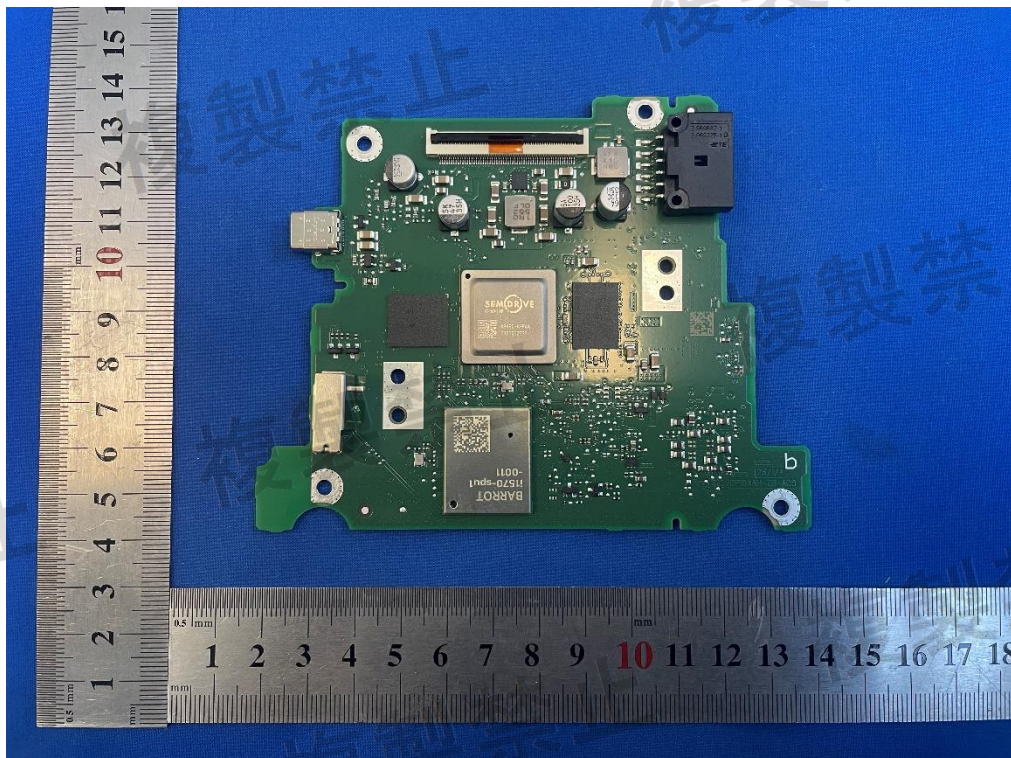


Photo 8: Internal View for PCB

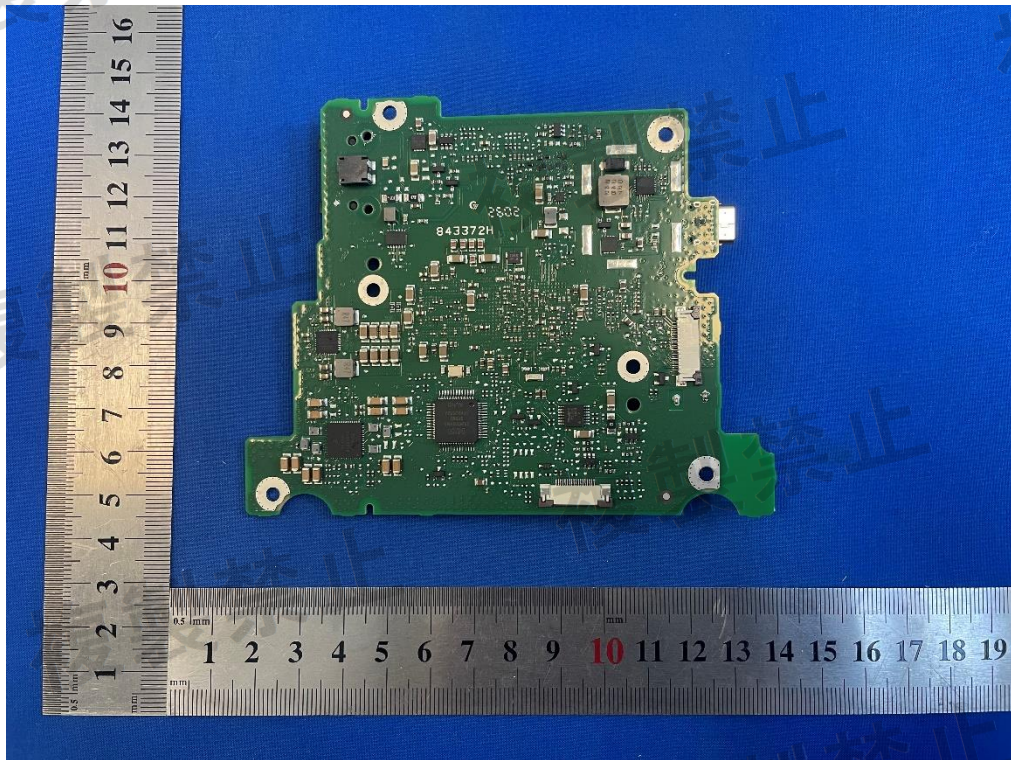


Photo 9: Internal View for PCB

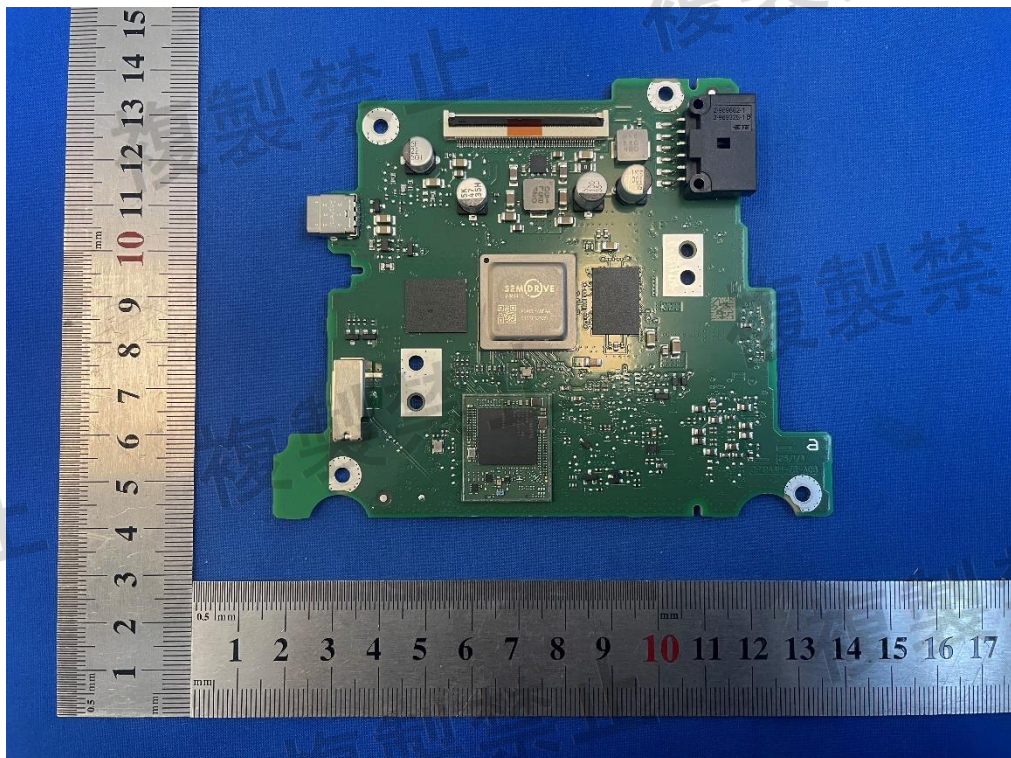


Photo 10: Internal View for PCB

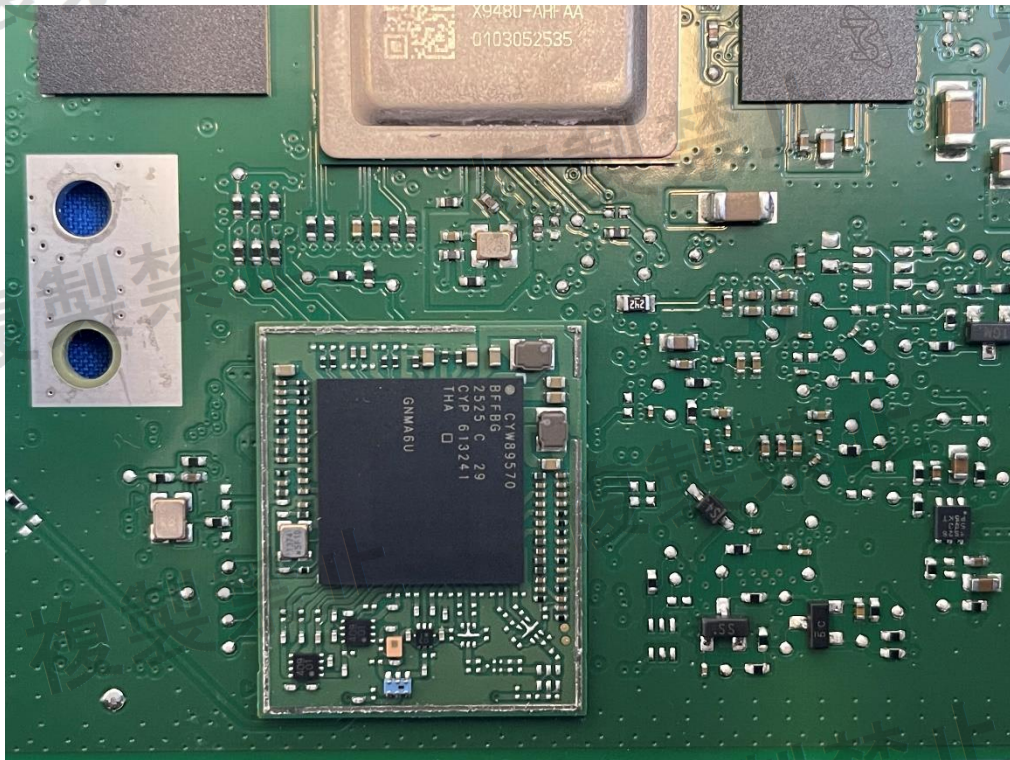


Photo 11: Internal View for RF Chip

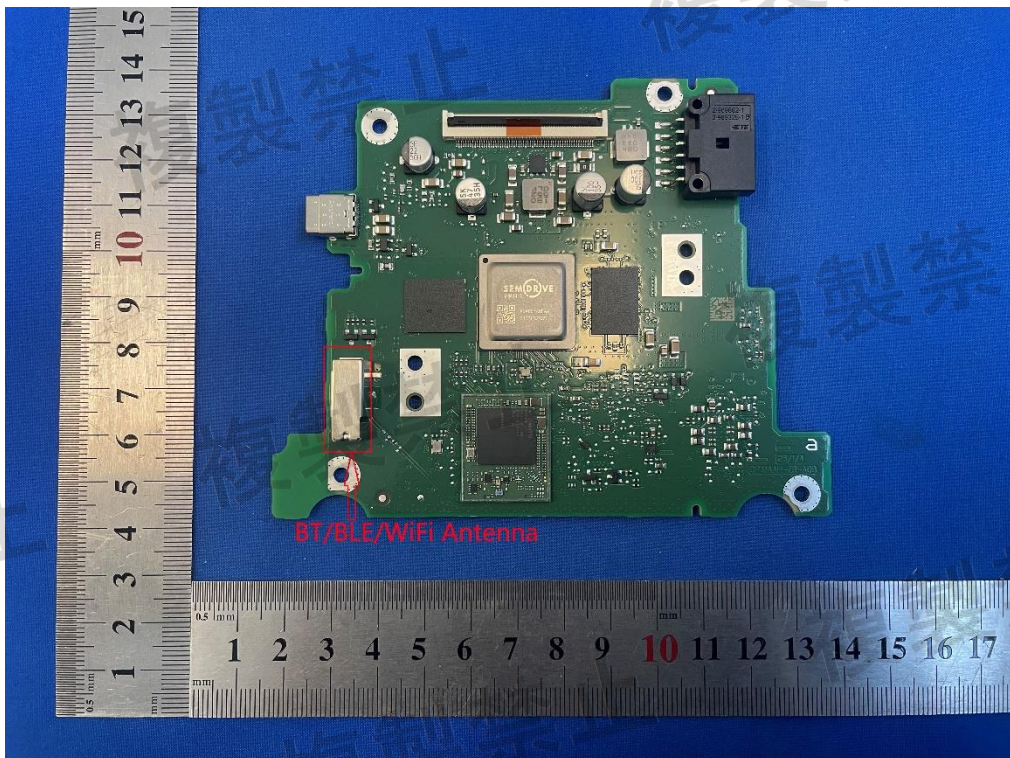


Photo 12: Internal View for BT/BLE/WiFi Antenna



Statement

1. This report is invalid for the following states: without the special inspection and testing stamp or the official stamp of our institution; without the signature of the report authorized officer; if the report is altered.
2. It is forbidden to copy partial contents of the report except in full without the approval of our institution.
3. The client shall provide the test sample(s) and commission information and be responsible for their authenticity.
4. The report content is only applicable to the tested sample(s) this time.
5. If there are any objections to the report content, please submit them to our company in writing within 15 days from the date of receiving the report.
6. If the reports include both Chinese and English versions, when there are any inconsistencies caused by language, the Chinese version shall prevail.
7. This report is issued by the following laboratory premises:
3/F., Comprehensive Laboratory Building, No.8, Ningyun Road, Xinwu District, Wuxi, Jiangsu, China (Ningyun Road Laboratory)

—This page is blank below this line —