




Appendix B

Frequency Error

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	b	2412	Ant1	2412.021	21000	8.71	50	Pass
NVNT	b	2442	Ant1	2442.031	31000	12.69	50	Pass
NVNT	b	2472	Ant1	2472.043	43000	17.39	50	Pass
NVNT	n40	2422	Ant1	2422.049	49000	20.23	50	Pass
NVNT	n40	2442	Ant1	2442.037	37000	15.15	50	Pass
NVNT	n40	2462	Ant1	2462.049	49000	19.9	50	Pass

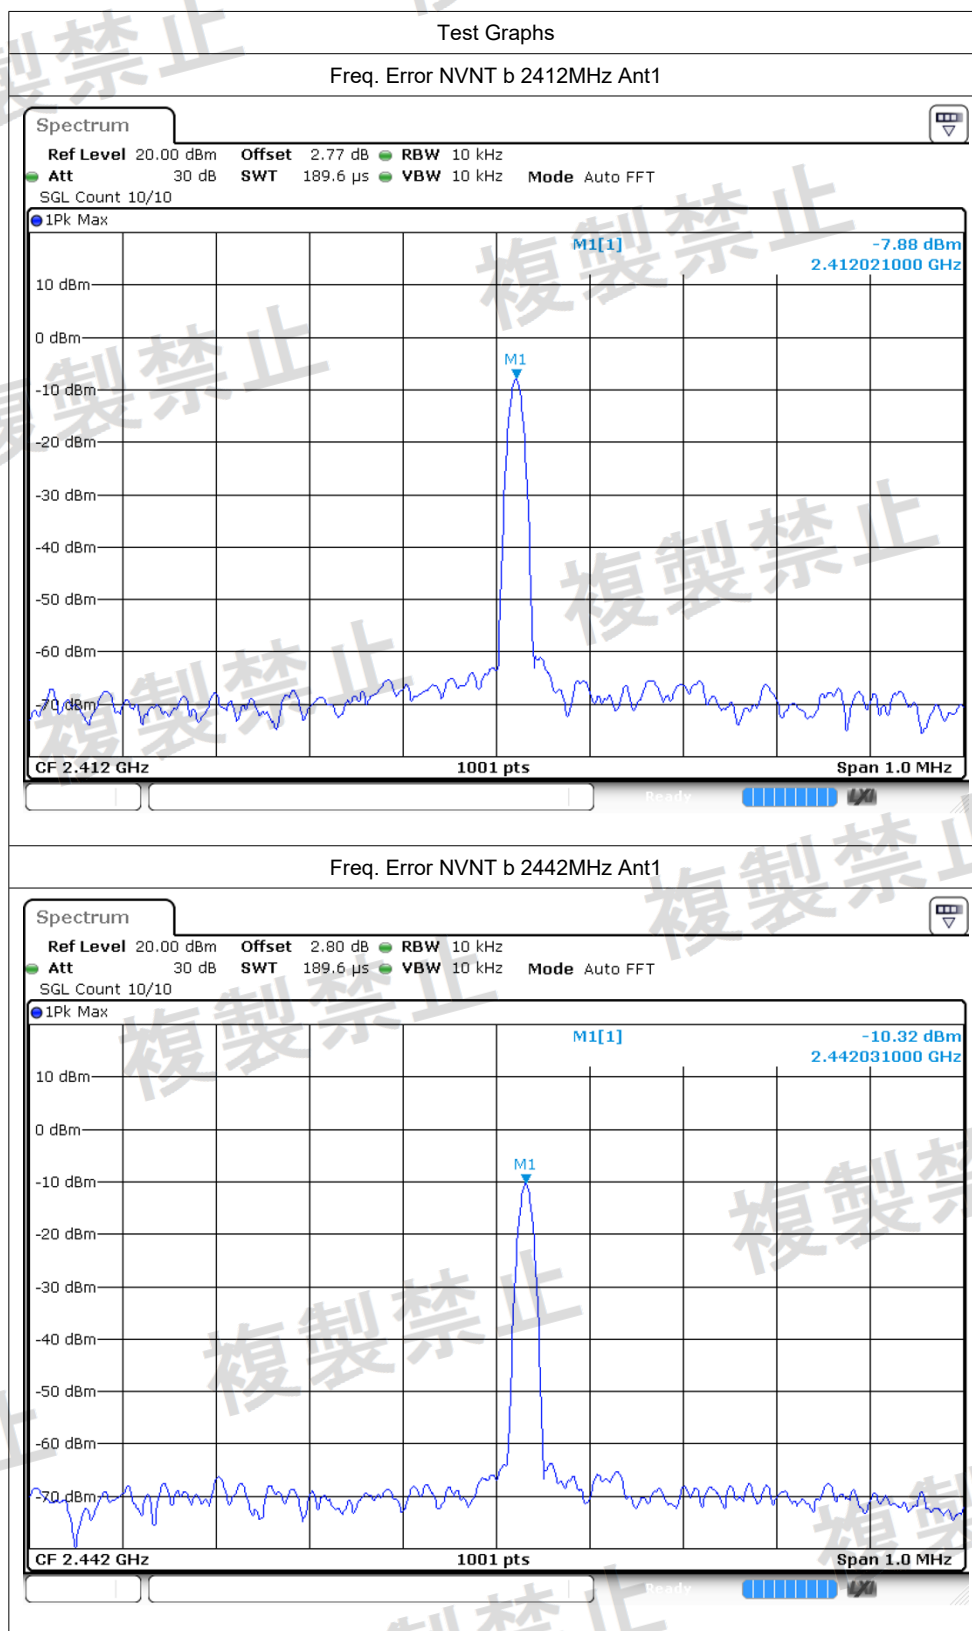


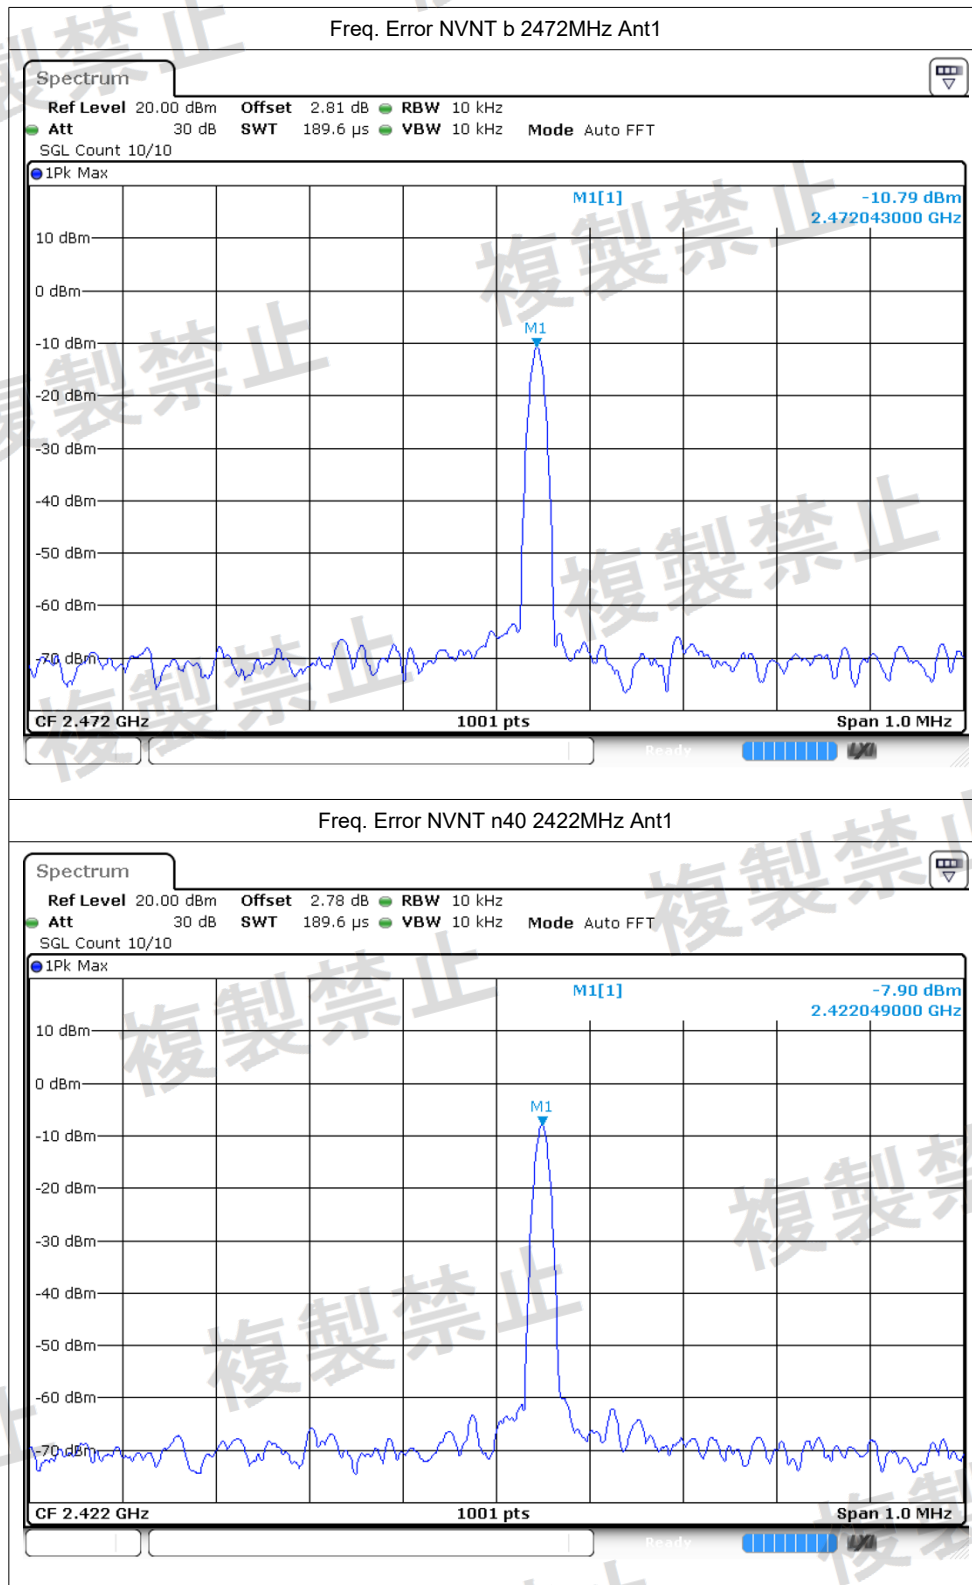


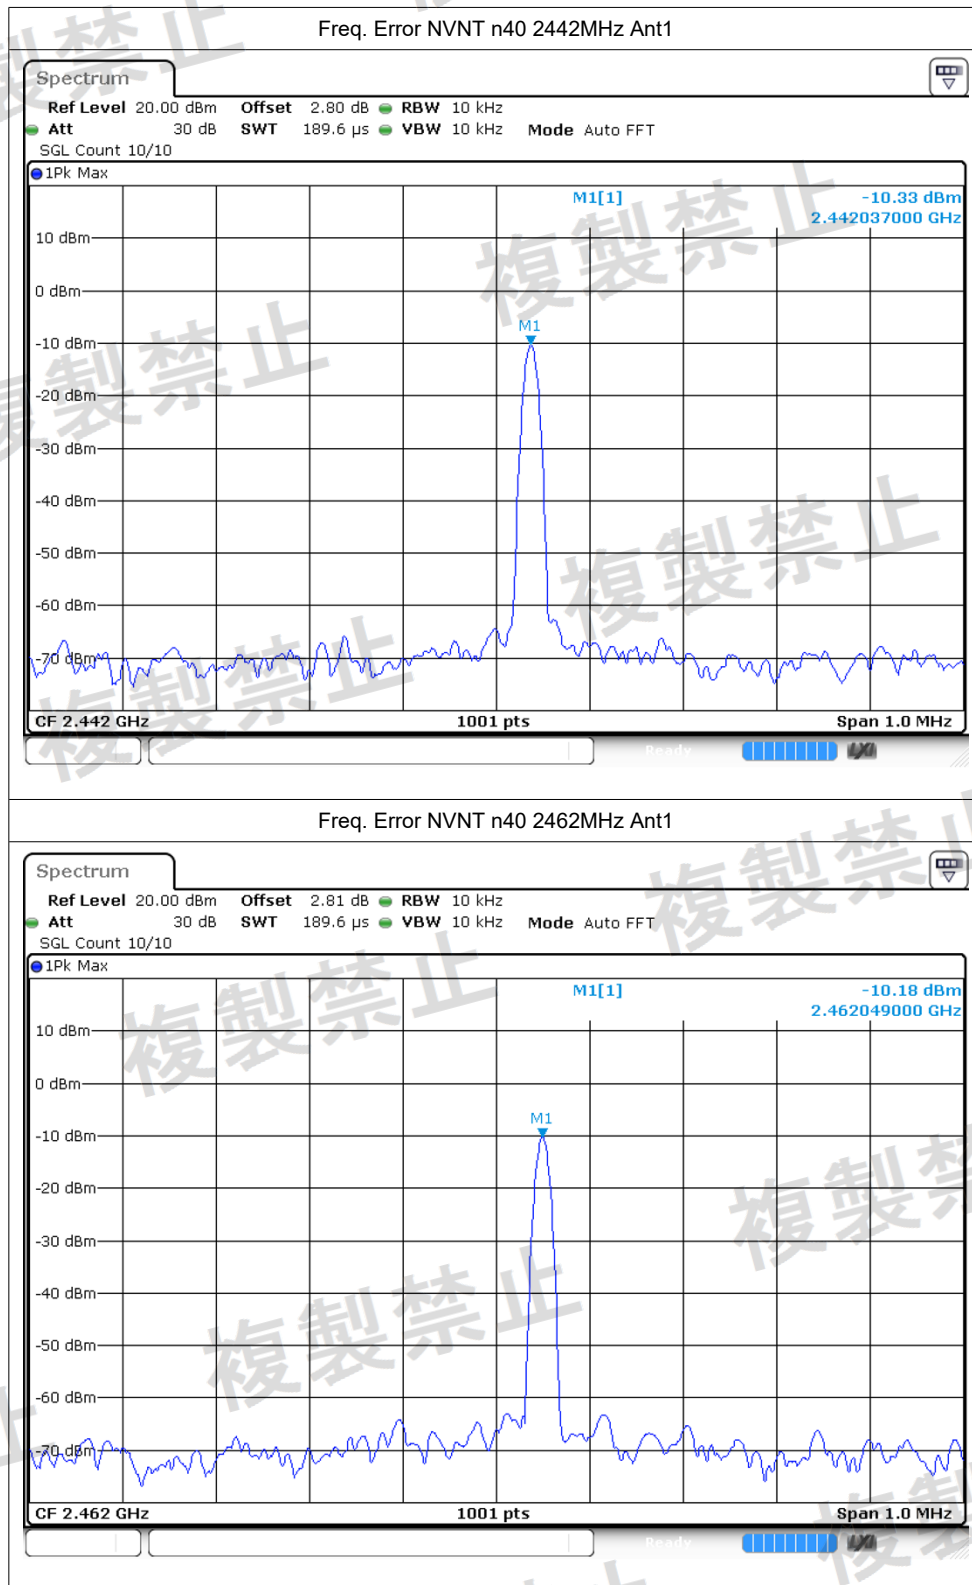



Antenna Power


Condition	Mode	Frequency (MHz)	Antenna	Power (dBm/MHz)	Power (mW/MHz)	Limit (mW/MHz)	Declared Power (mW/MHz)	Tolerance (%)	Lower Limit (%)	Upper Limit (%)	Verdict
NVNT	b	2412	Ant1	0.37	1.089	10	1	8.90	-	20	Pass
NVNT	b	2442	Ant1	-0.32	0.929	10	1	-7.10	-	20	Pass
NVNT	b	2472	Ant1	-0.59	0.873	10	1	-12.70	-	20	Pass
NVNT	g	2412	Ant1	-2.58	0.552	10	0.6	-8.00	-	20	Pass
NVNT	g	2442	Ant1	-2.11	0.615	10	0.6	2.50	-	20	Pass
NVNT	g	2472	Ant1	-3.14	0.485	10	0.6	-19.17	-	20	Pass
NVNT	n20	2412	Ant1	-2.38	0.578	10	0.6	-3.67	-	20	Pass
NVNT	n20	2442	Ant1	-2.92	0.511	10	0.6	-14.83	-	20	Pass
NVNT	n20	2472	Ant1	-3.87	0.41	10	0.6	-31.67	-	20	Pass
NVNT	n40	2422	Ant1	-6.15	0.243	5	0.3	-19.00	-	20	Pass
NVNT	n40	2442	Ant1	-5.57	0.277	5	0.3	-7.67	-	20	Pass
NVNT	n40	2462	Ant1	-5.55	0.279	5	0.3	-7.00	-	20	Pass
NVNT	ax20	2412	Ant1	-4.34	0.368	10	0.4	-8.00	-	20	Pass
NVNT	ax20	2442	Ant1	-3.77	0.42	10	0.4	5.00	-	20	Pass
NVNT	ax20	2472	Ant1	-4.38	0.365	10	0.4	-8.75	-	20	Pass
NVNT	ax40	2422	Ant1	-8.07	0.156	5	0.2	-22.00	-	20	Pass
NVNT	ax40	2442	Ant1	-6.86	0.206	5	0.2	3.00	-	20	Pass
NVNT	ax40	2462	Ant1	-6.71	0.213	5	0.2	6.50	-	20	Pass

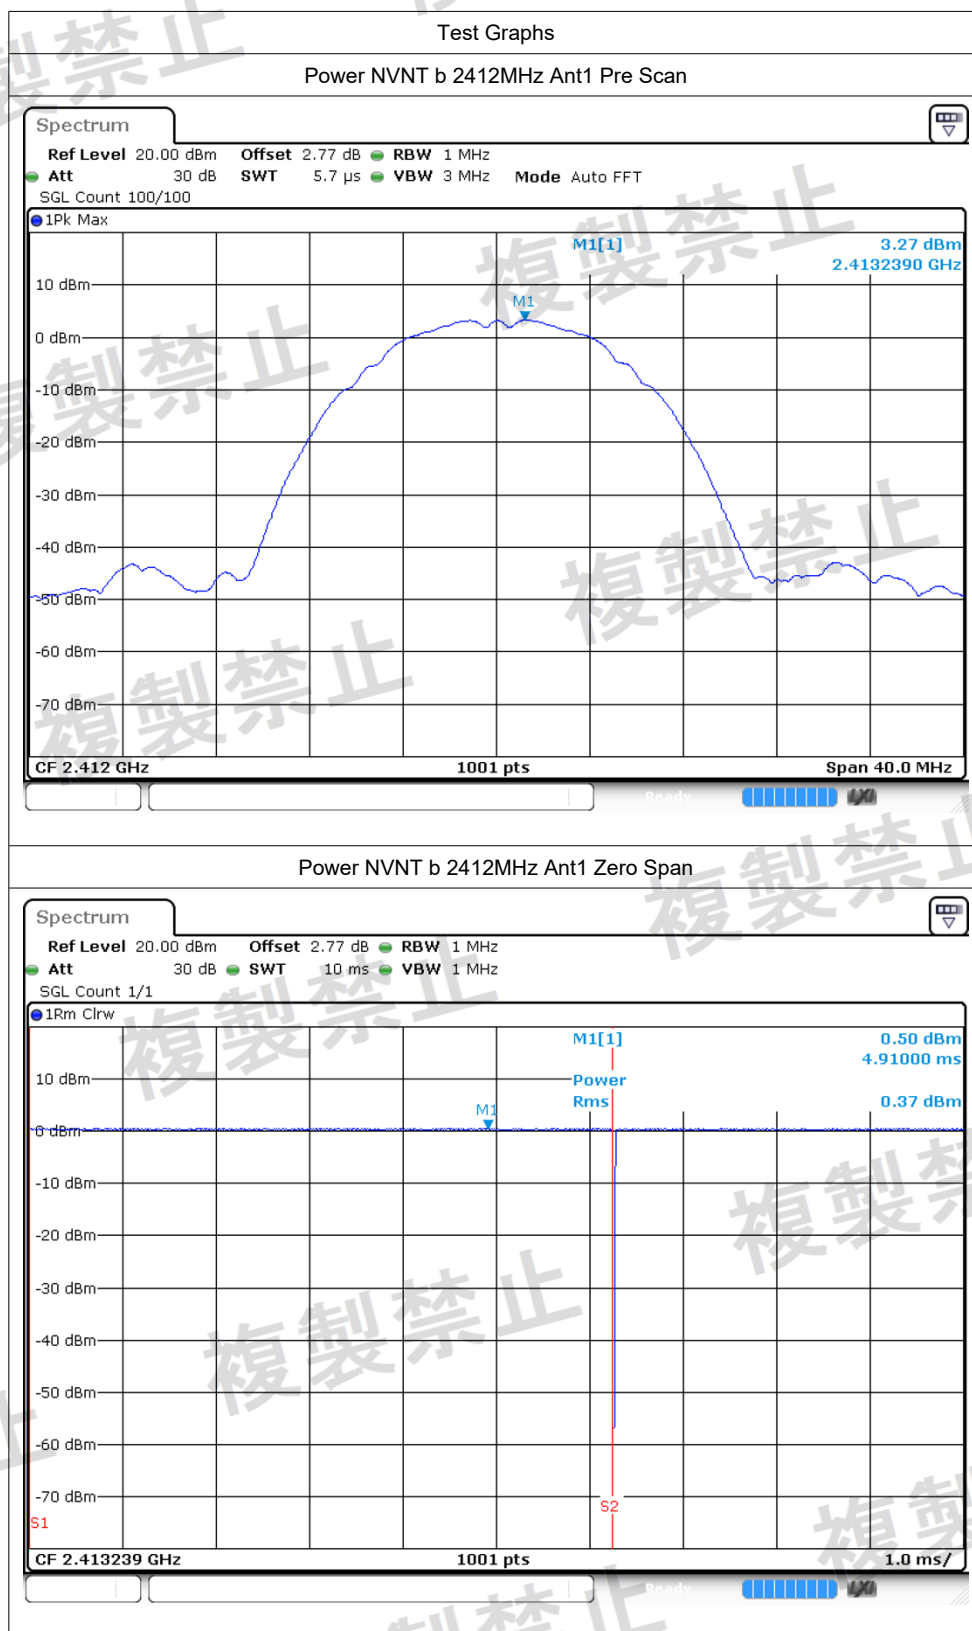


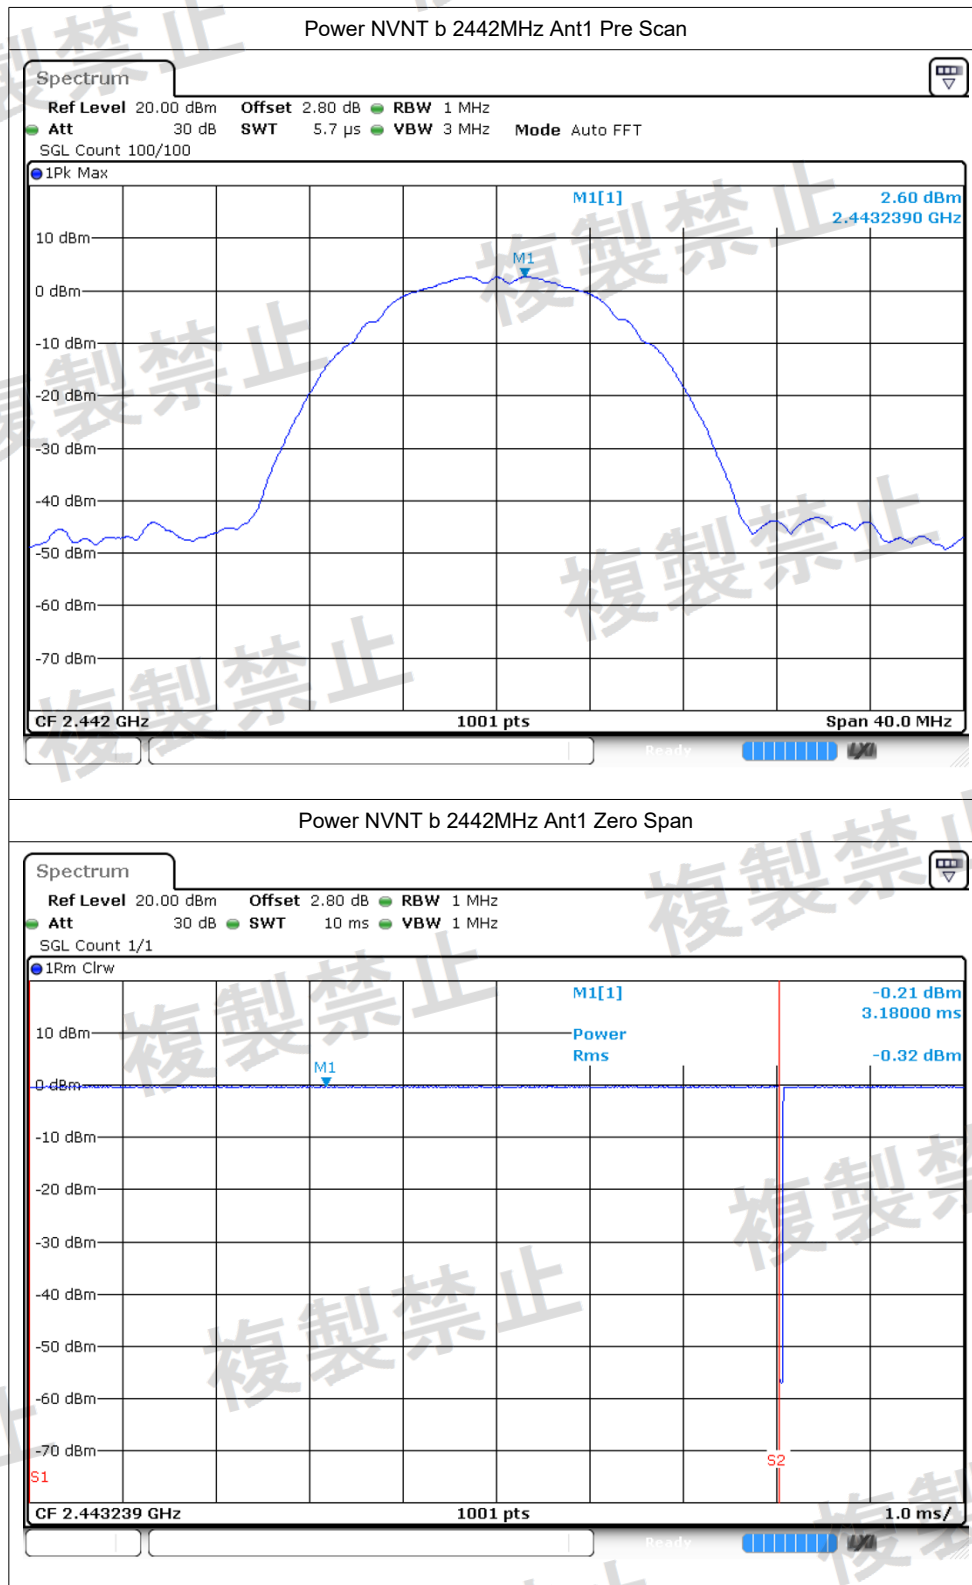


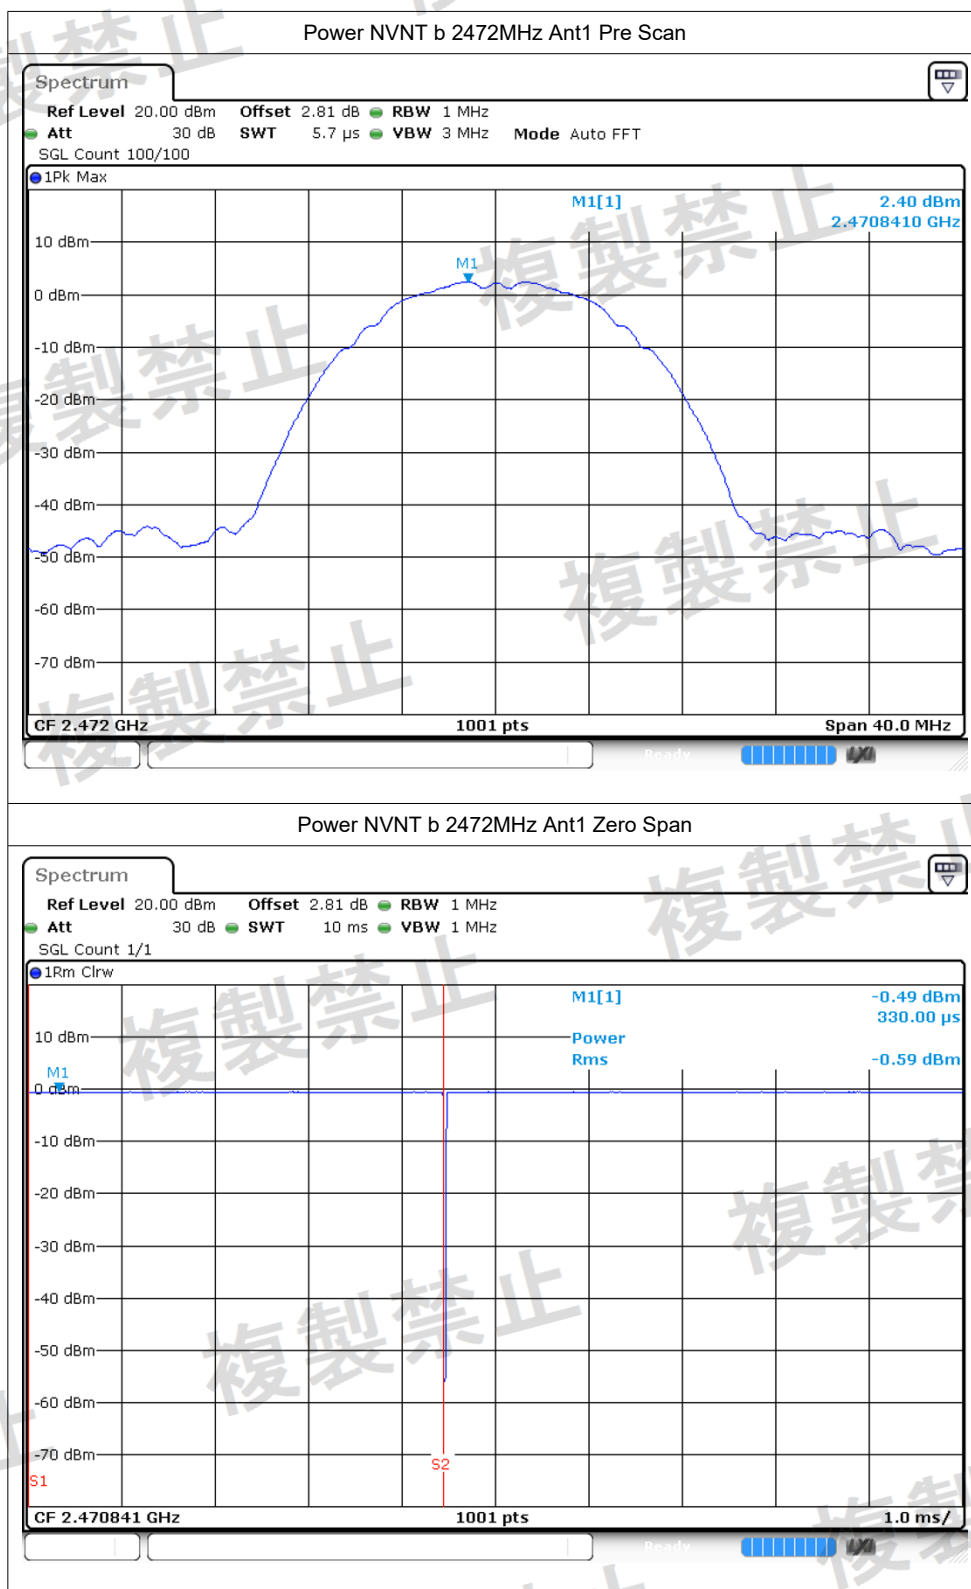


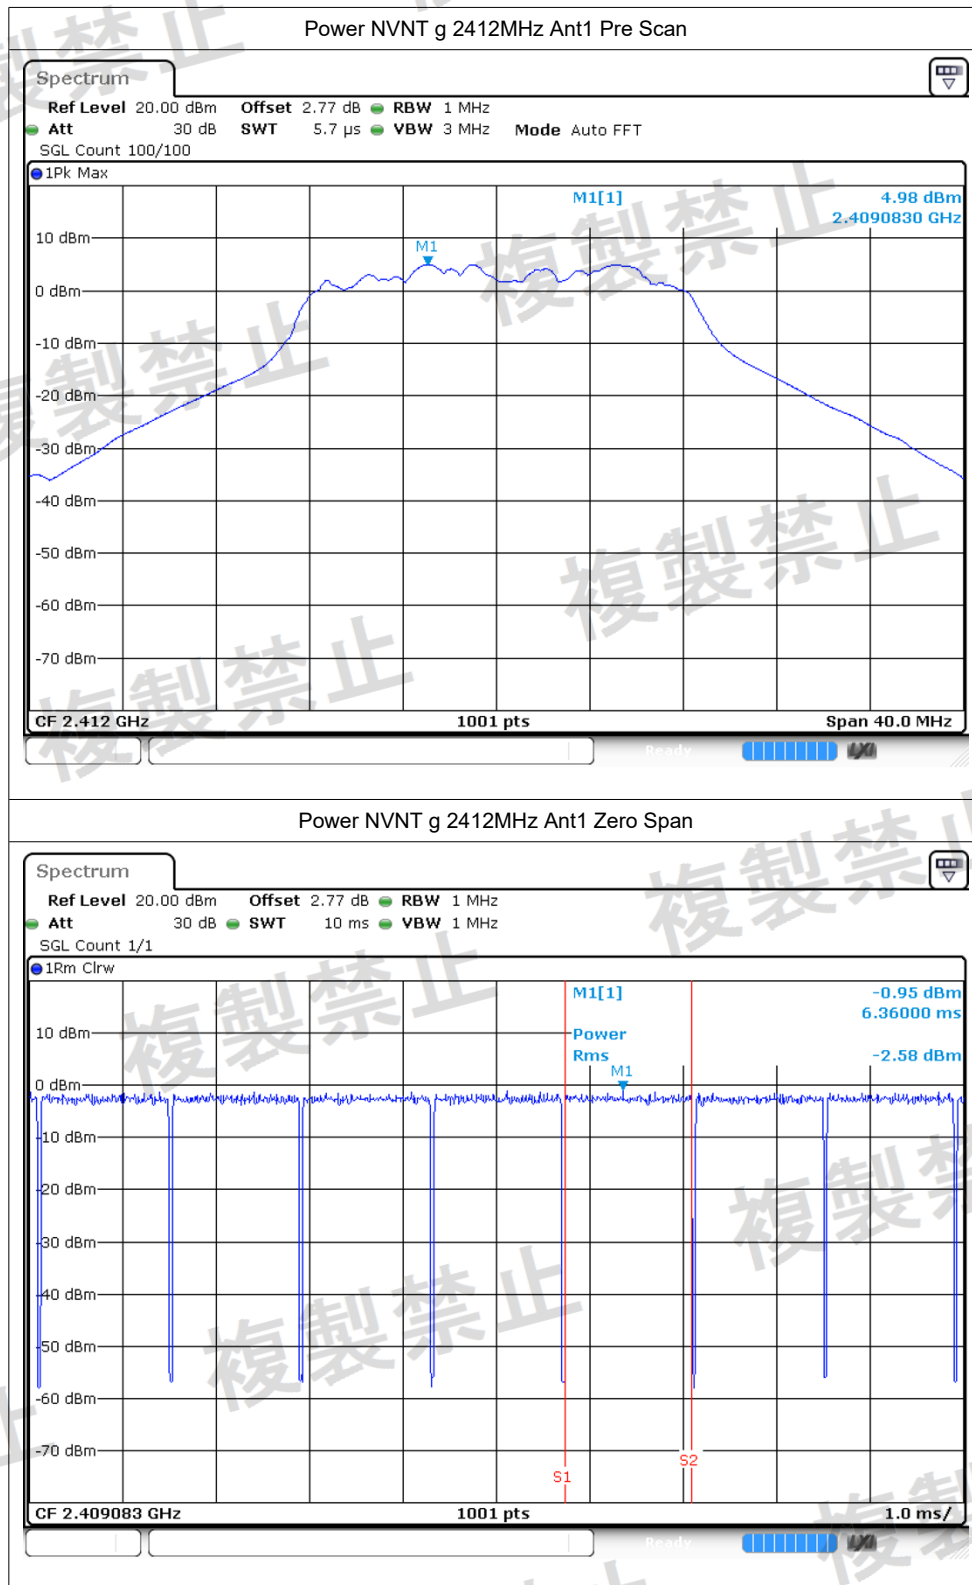


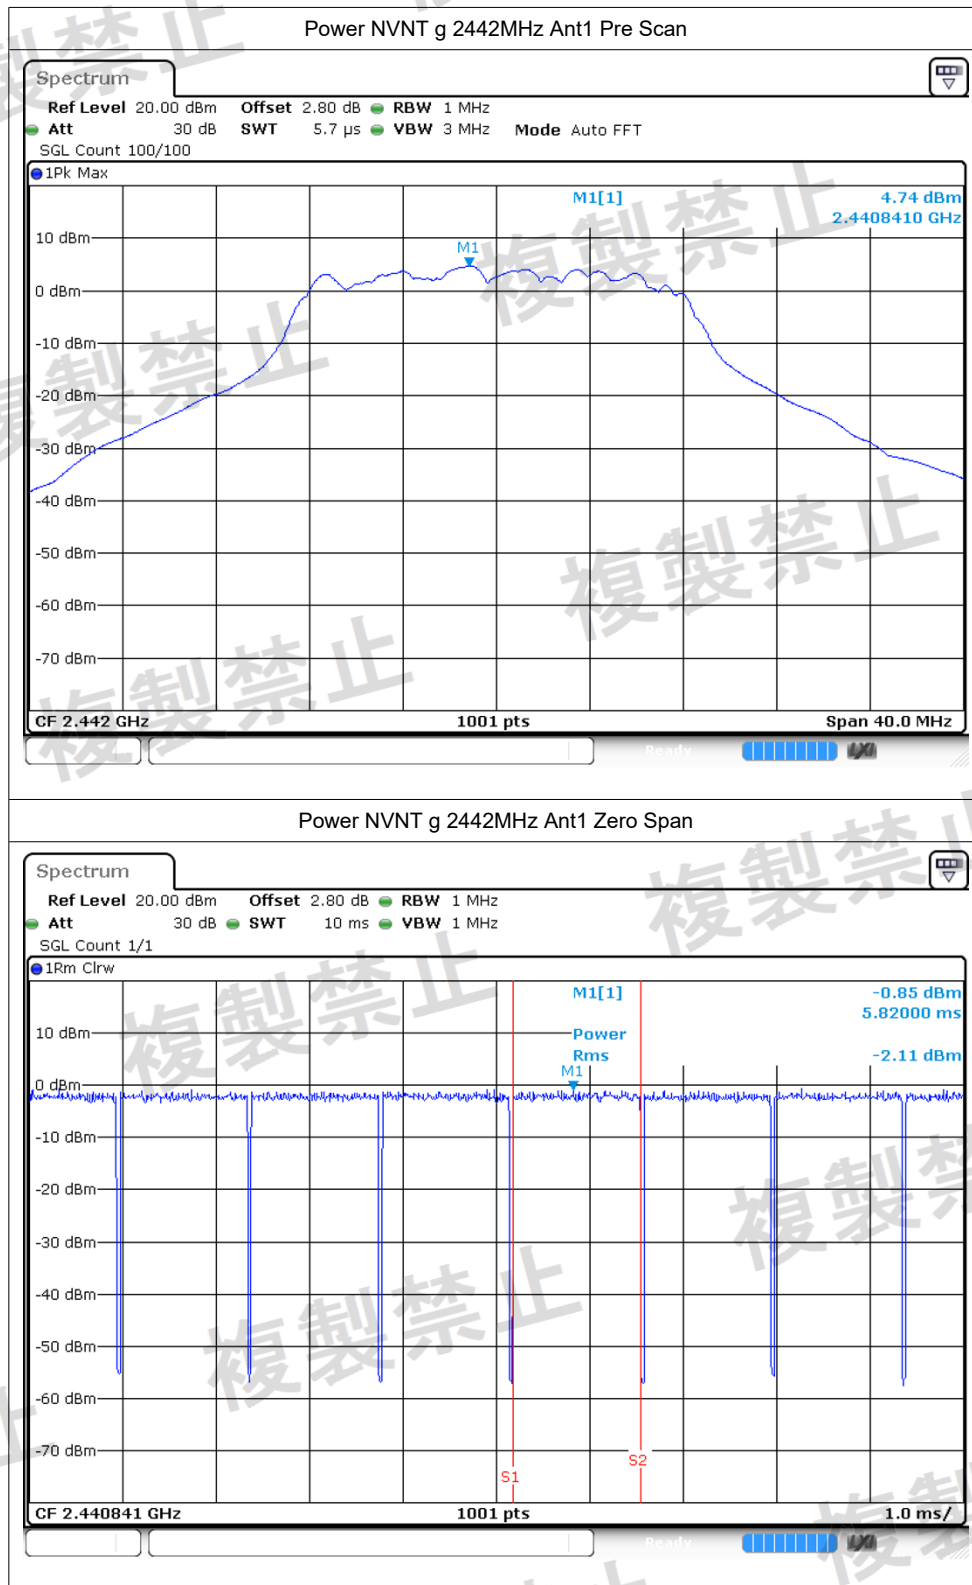


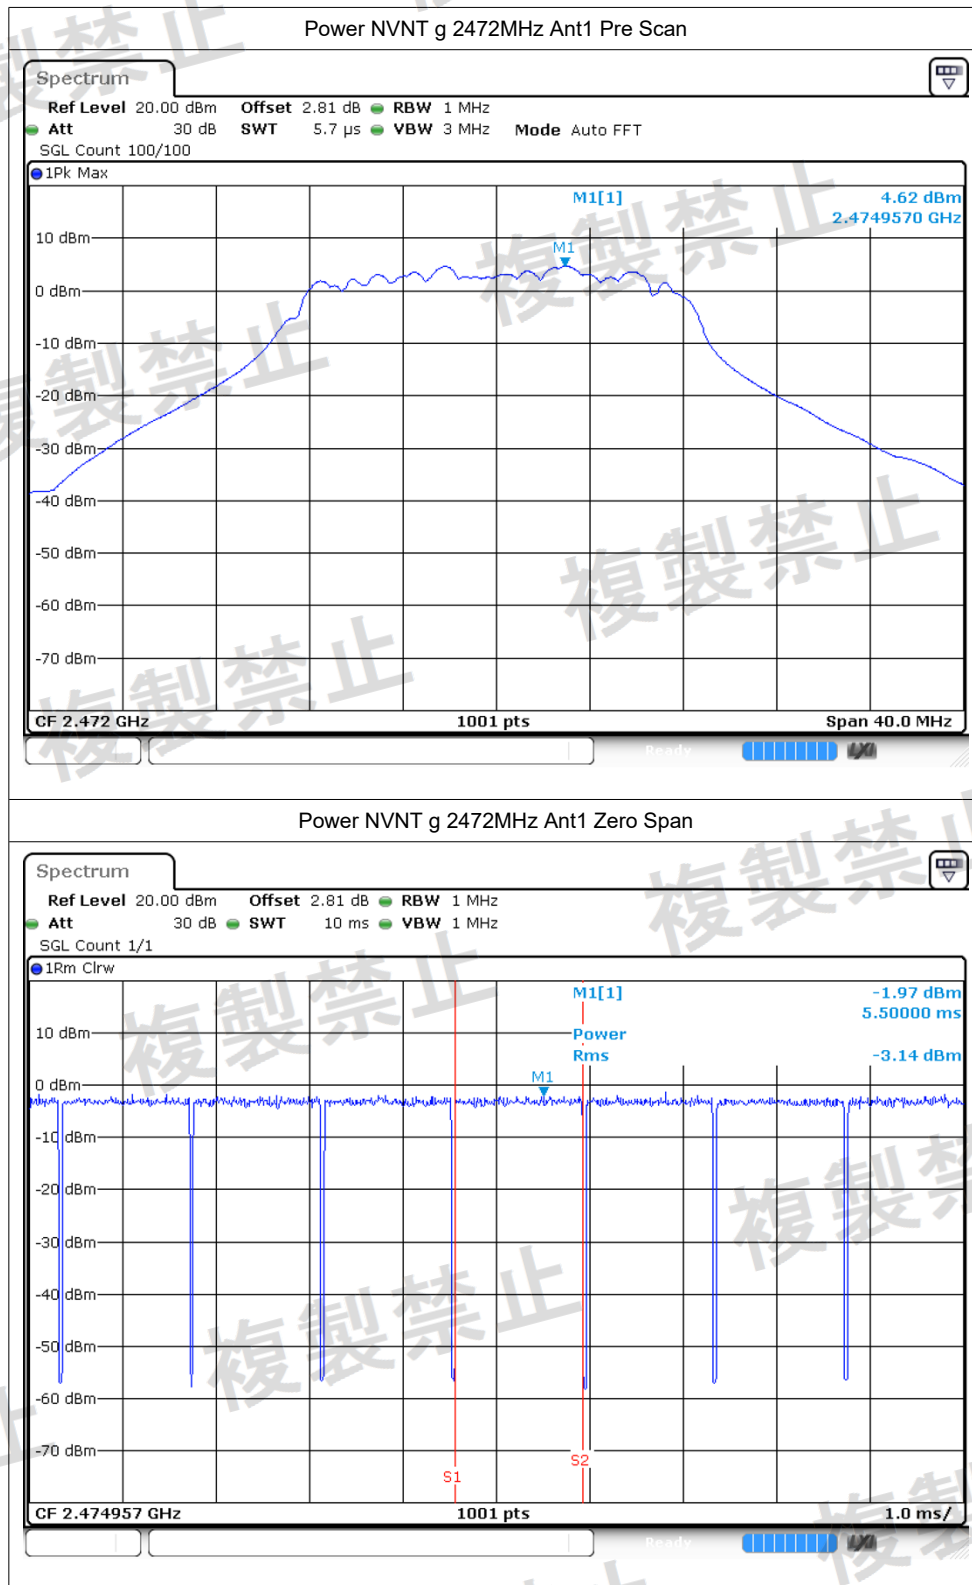


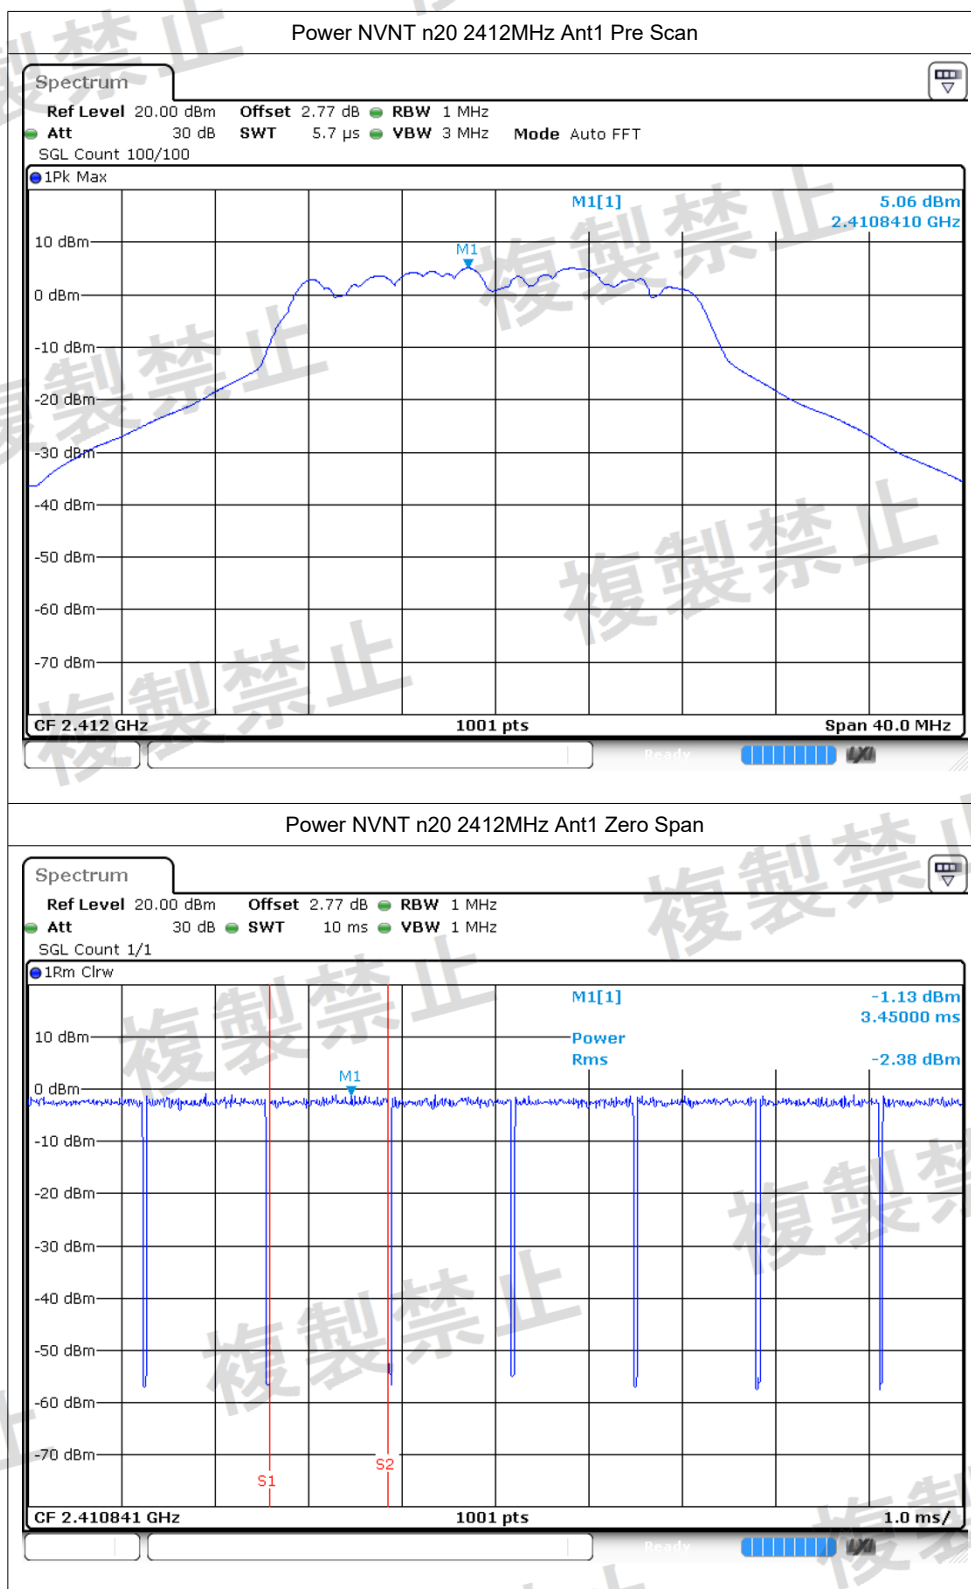


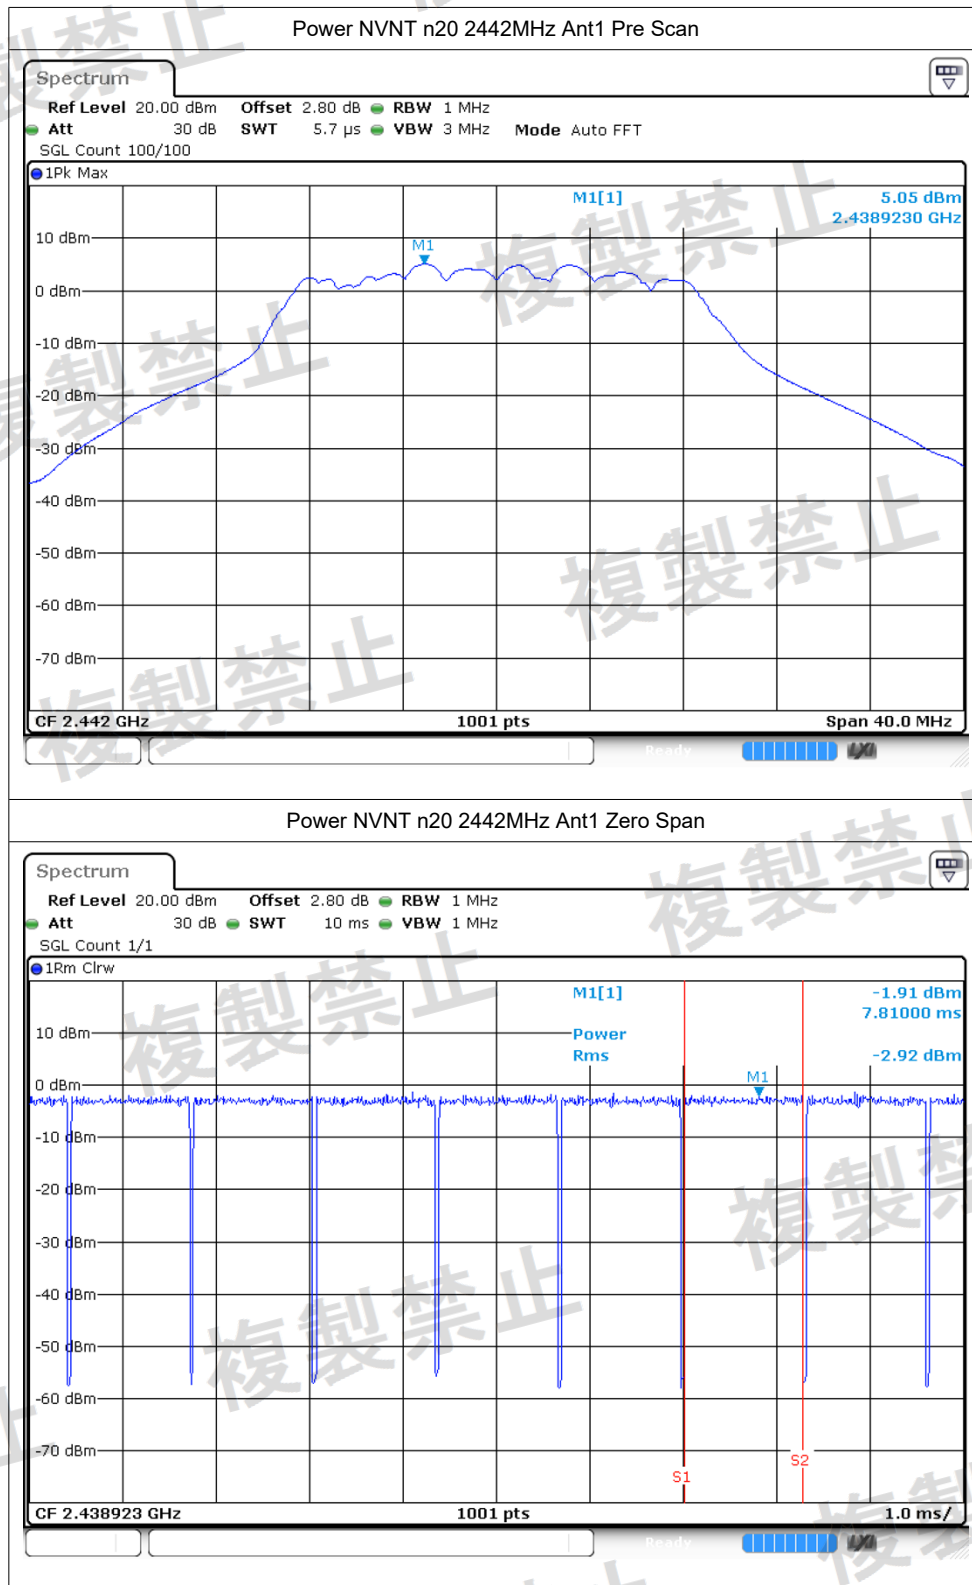



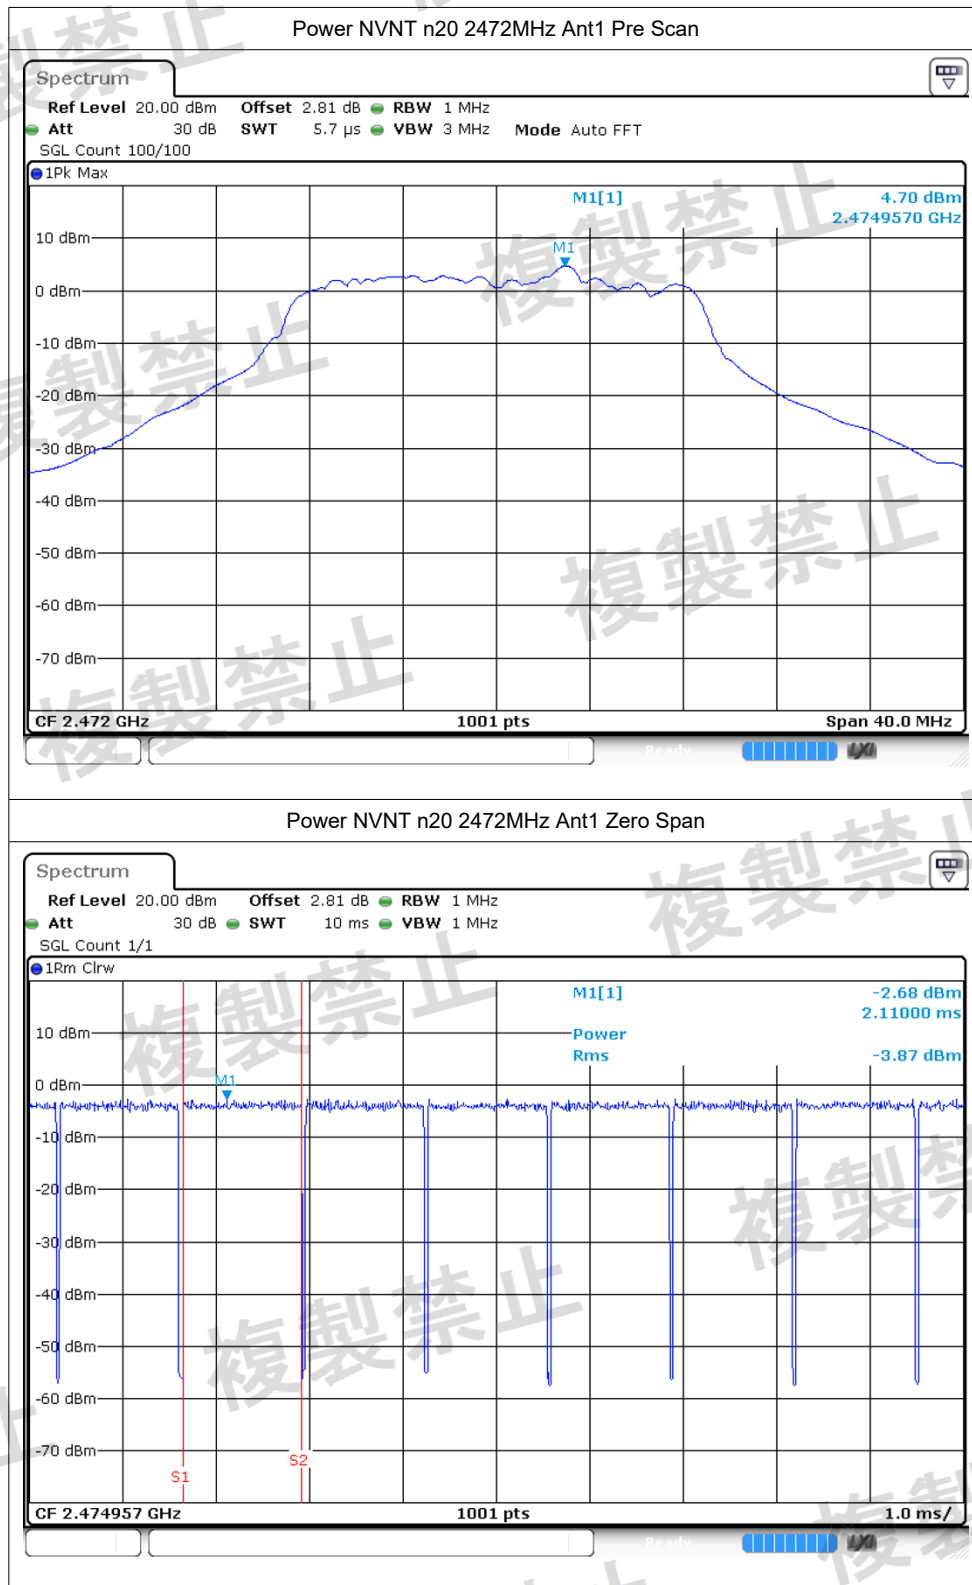


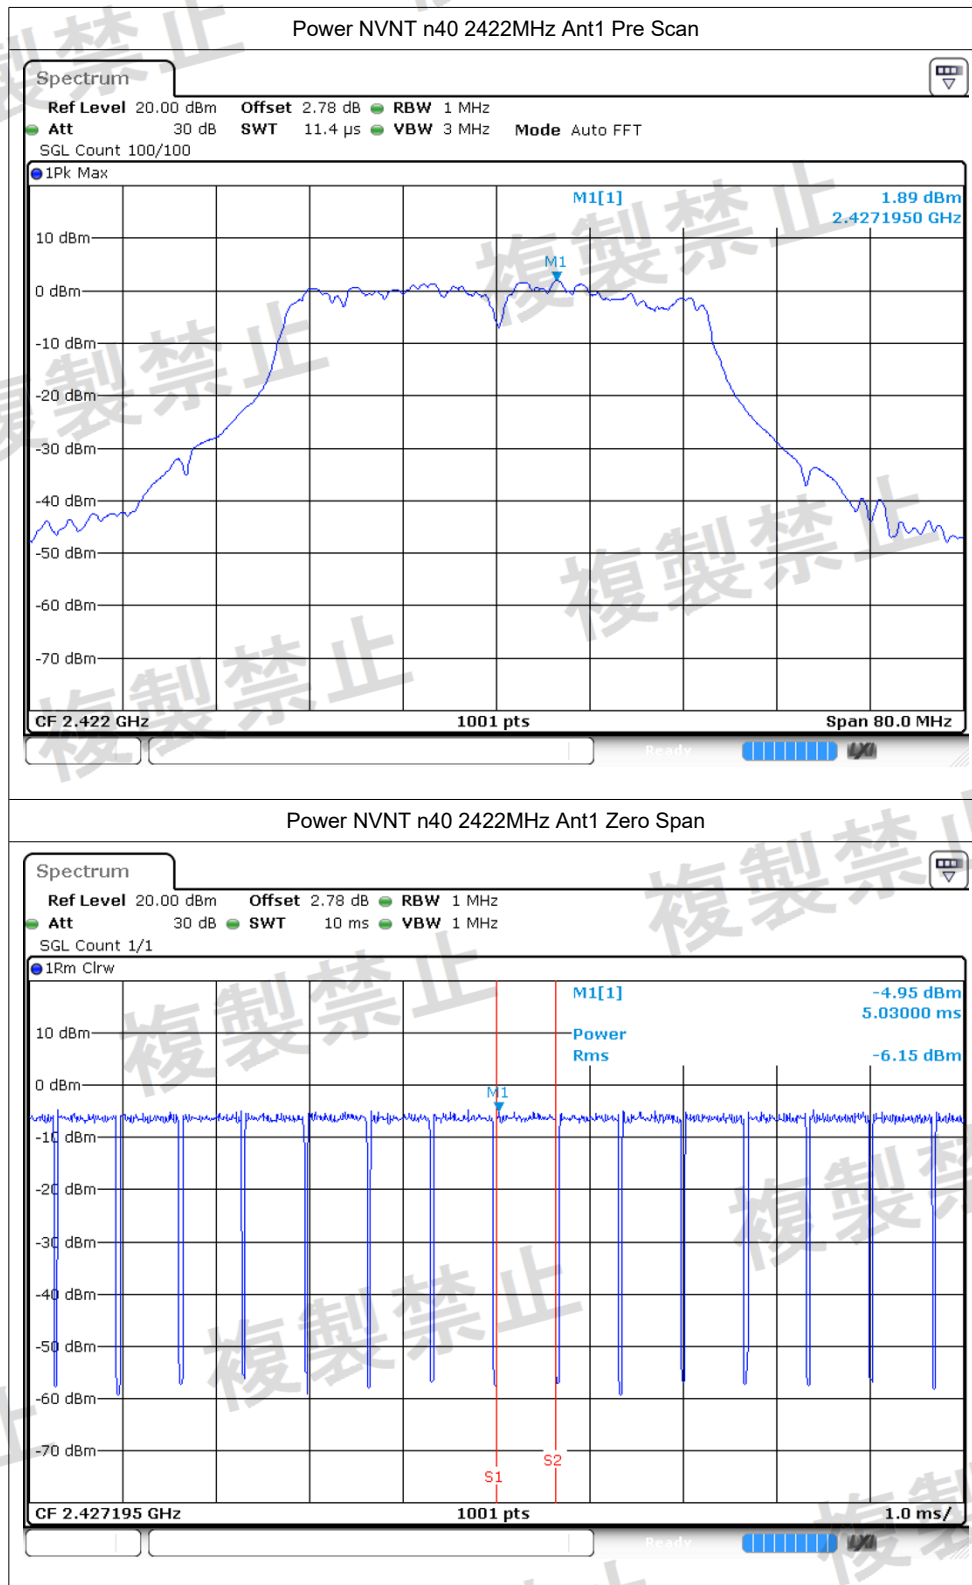


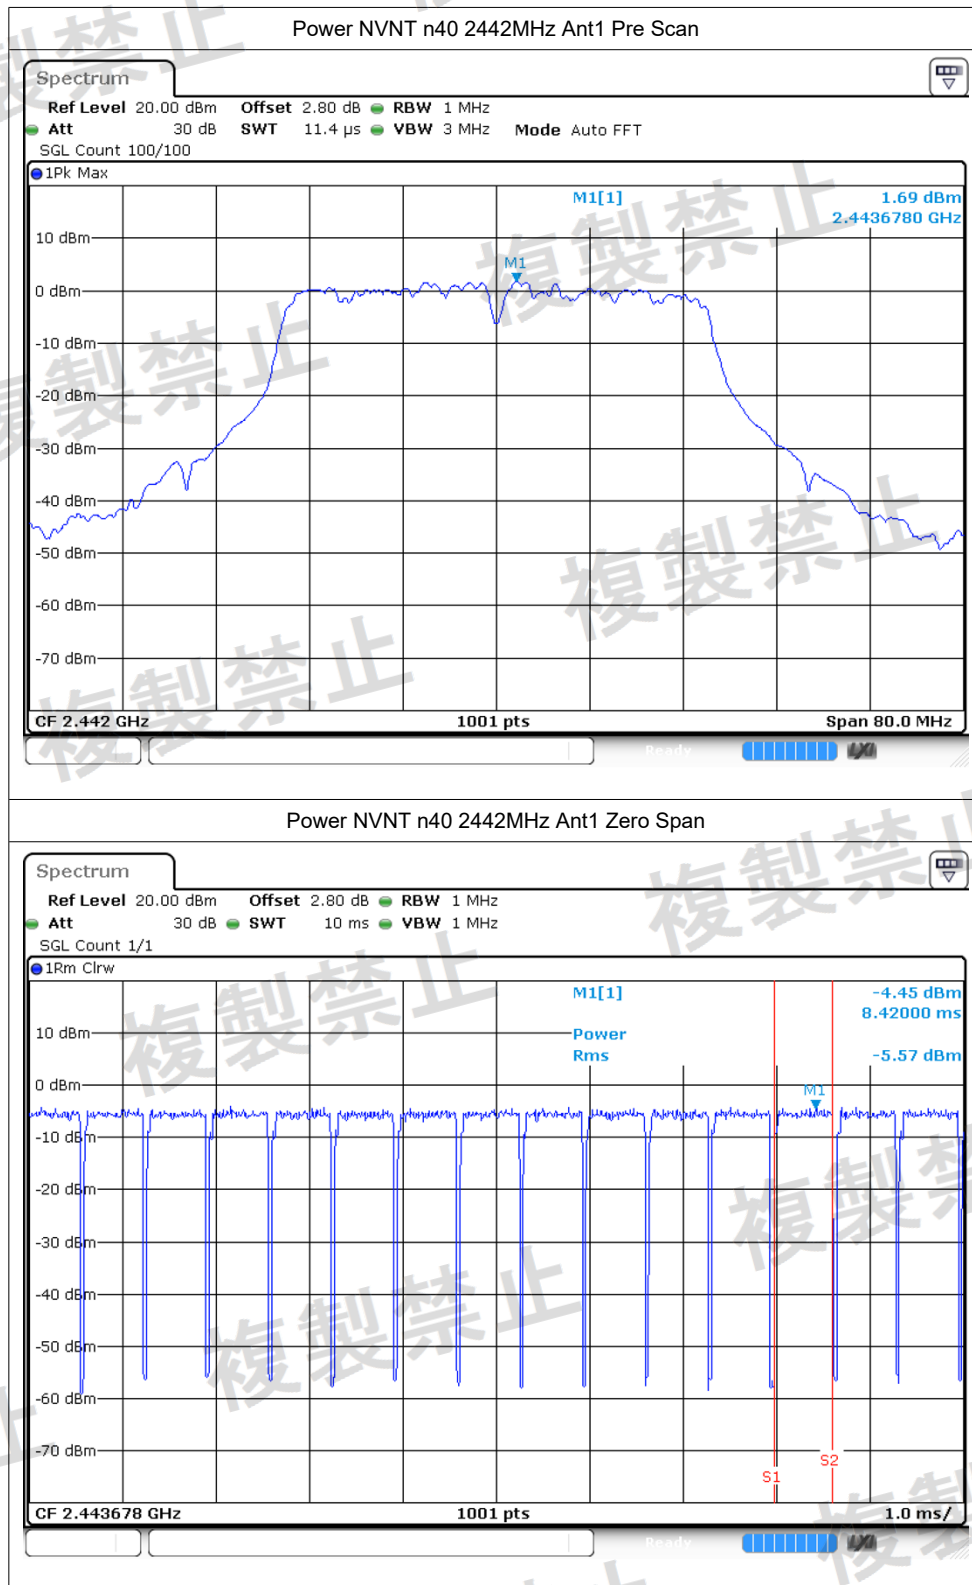


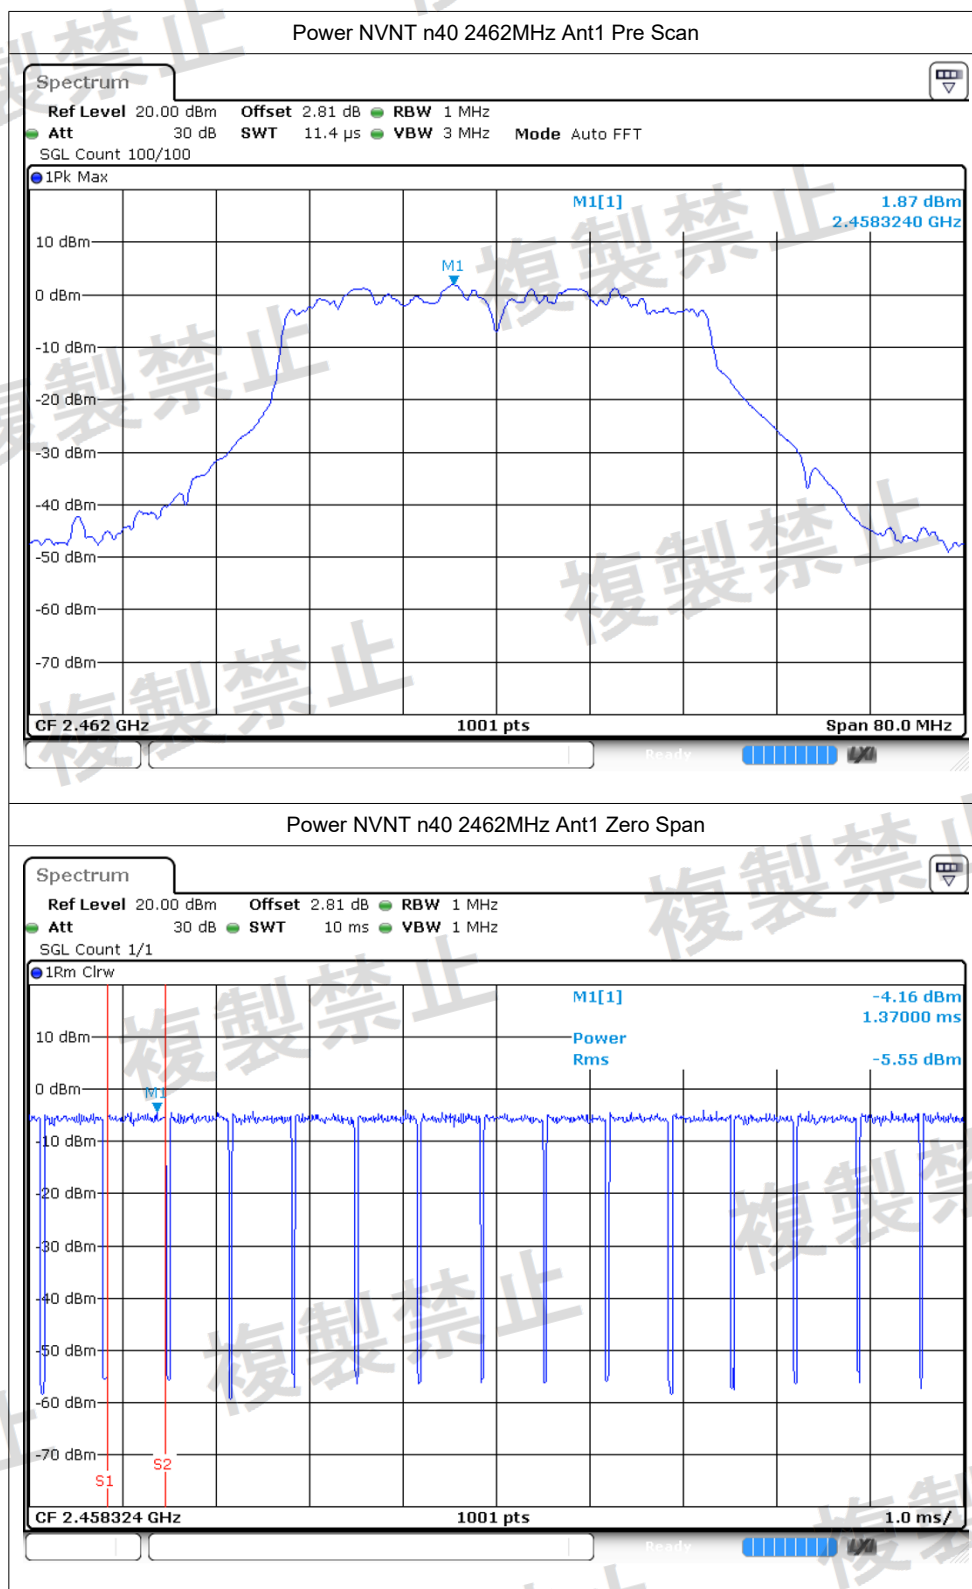


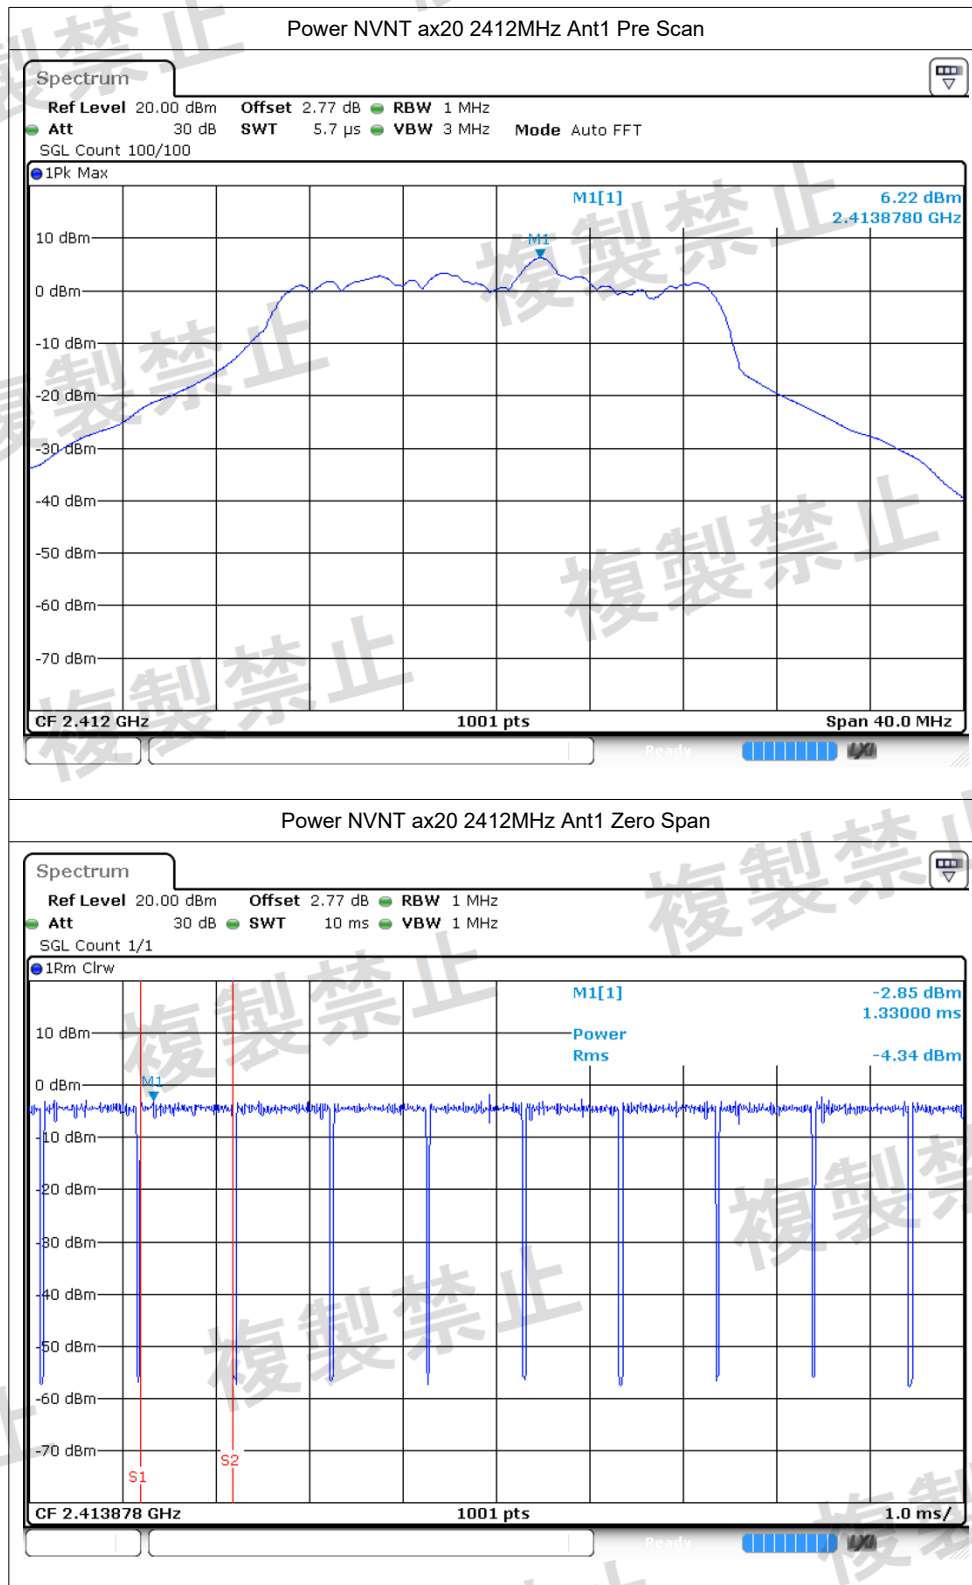


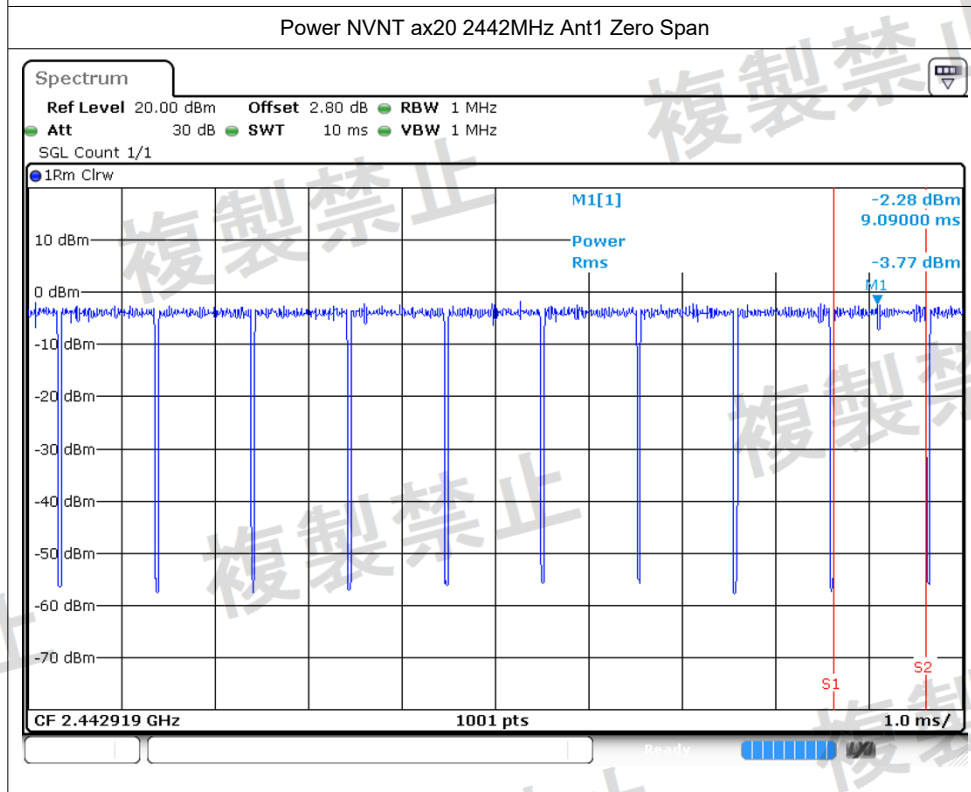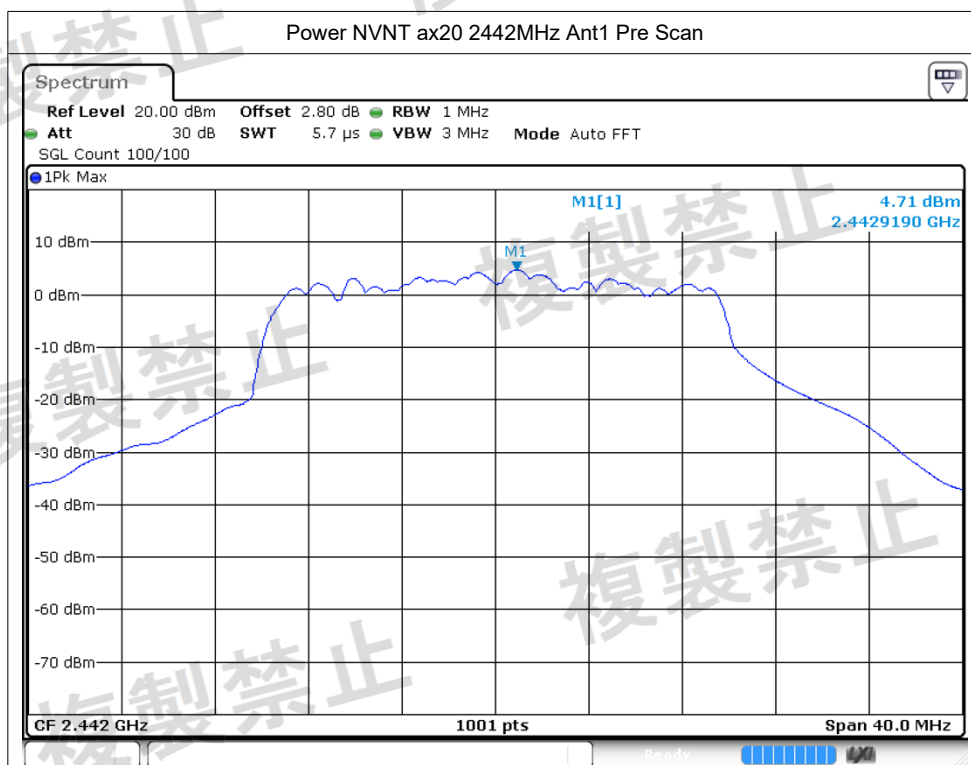

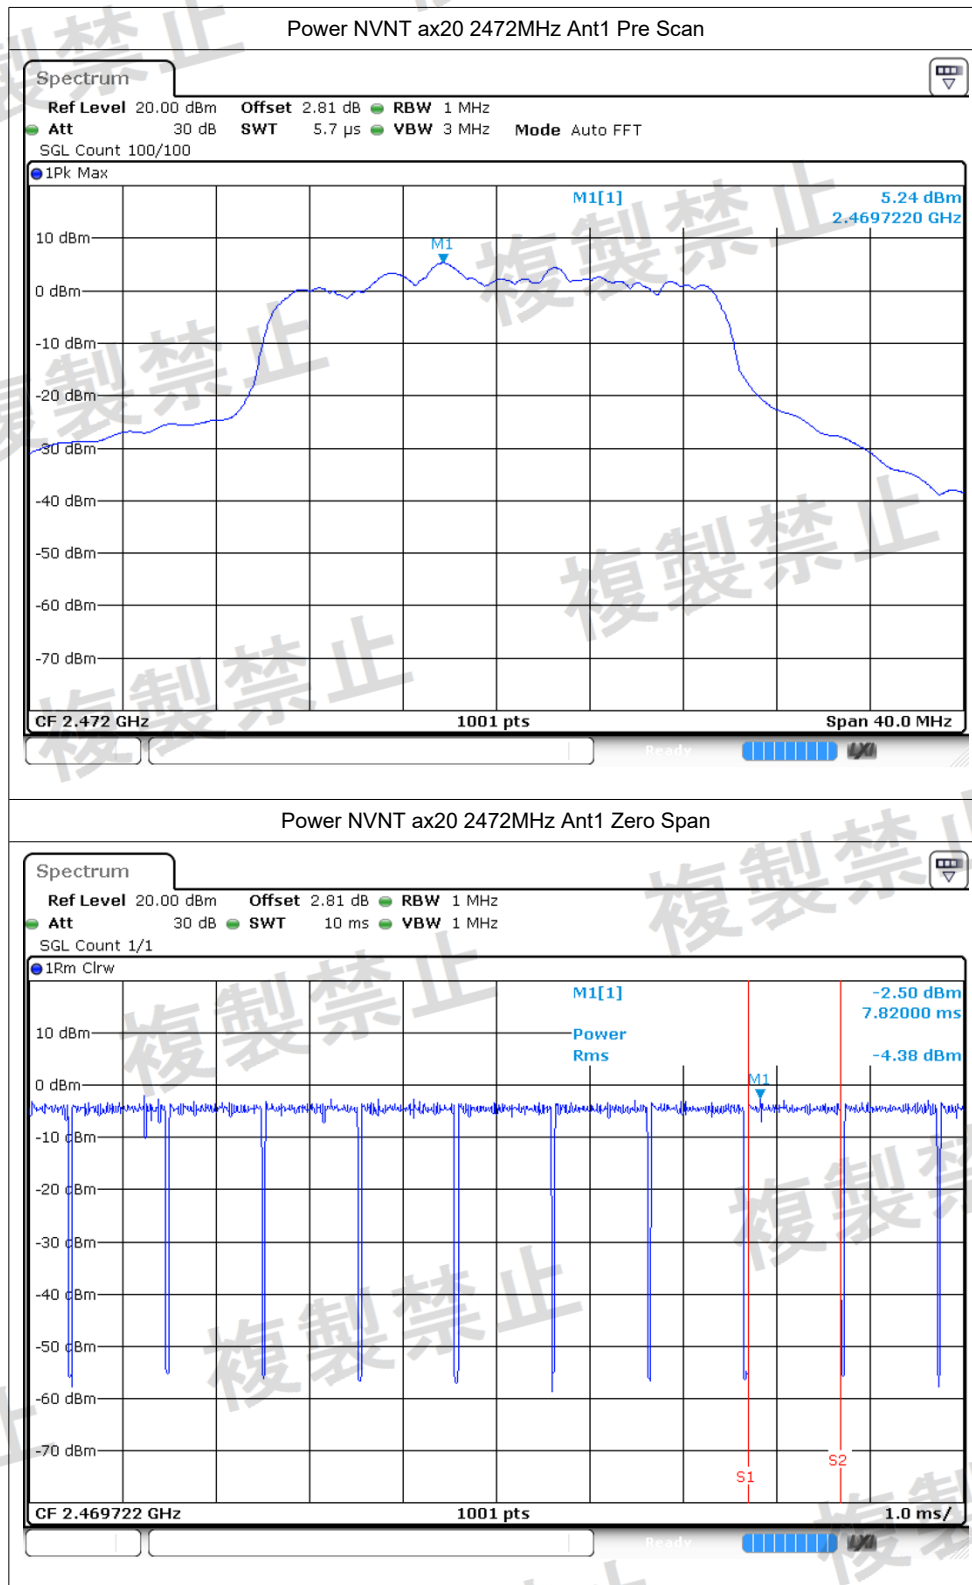

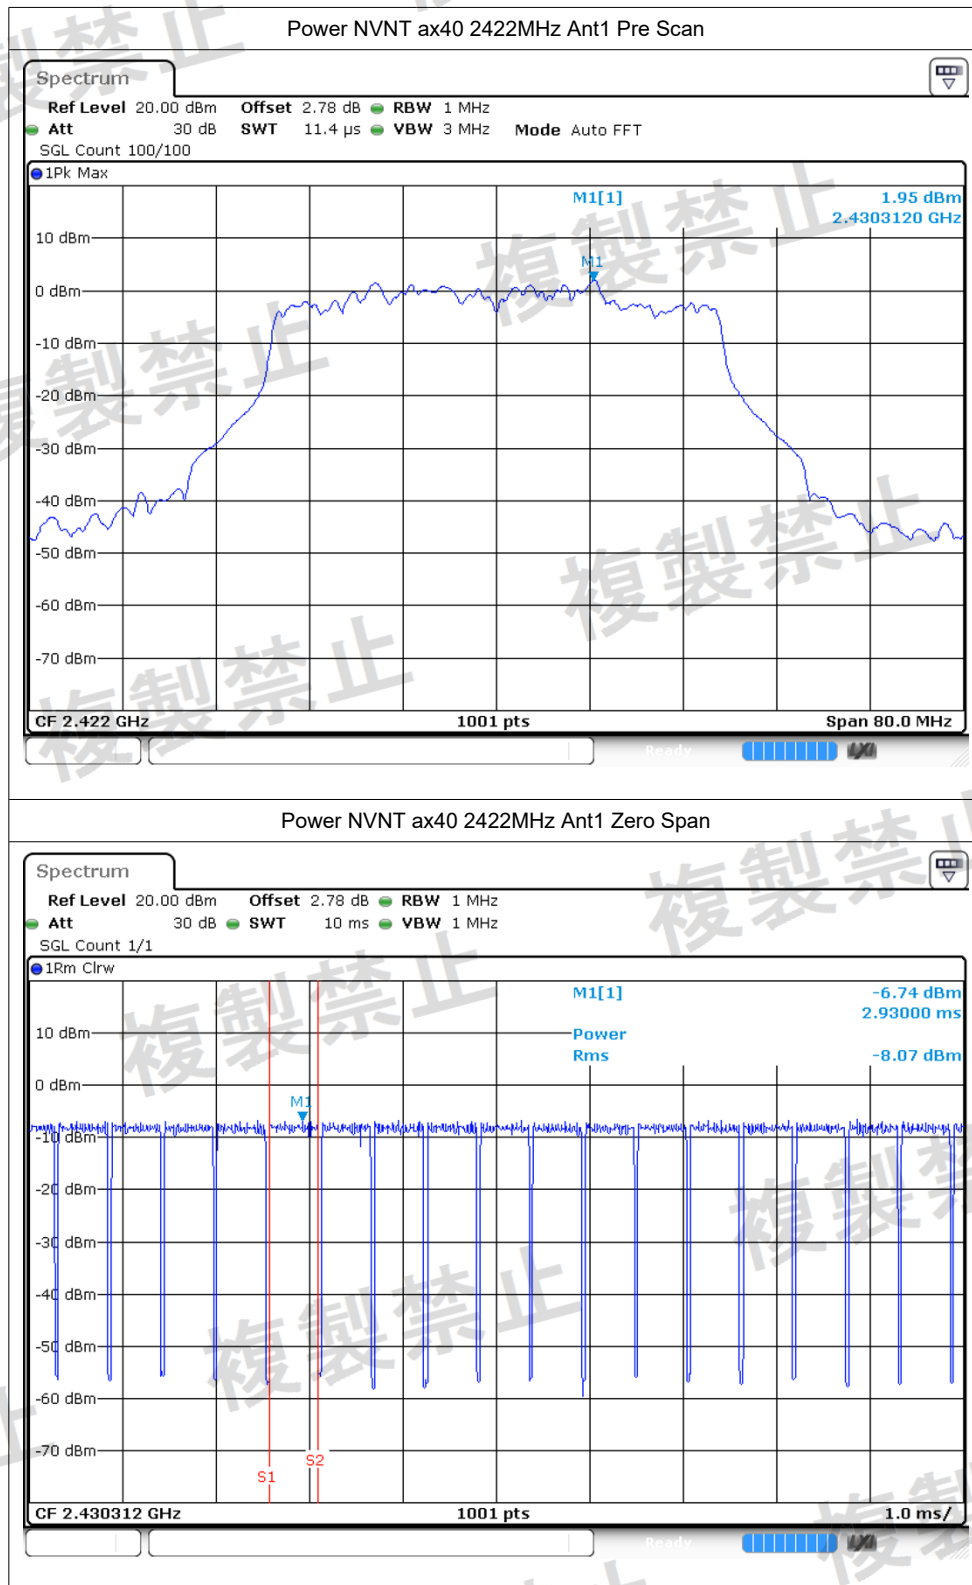

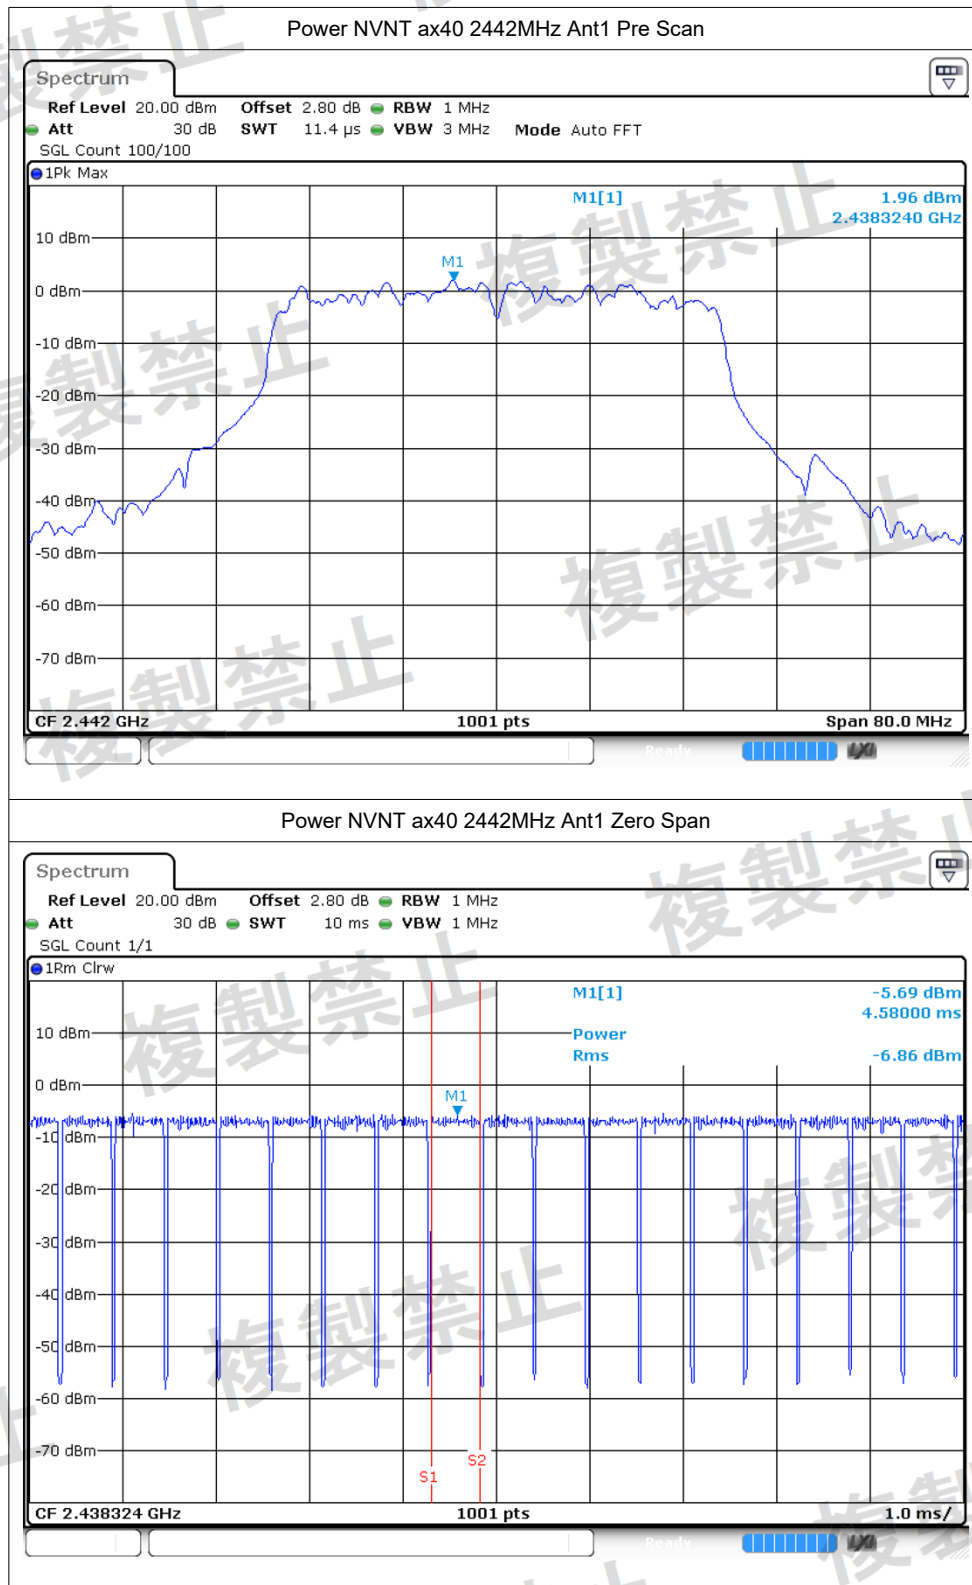

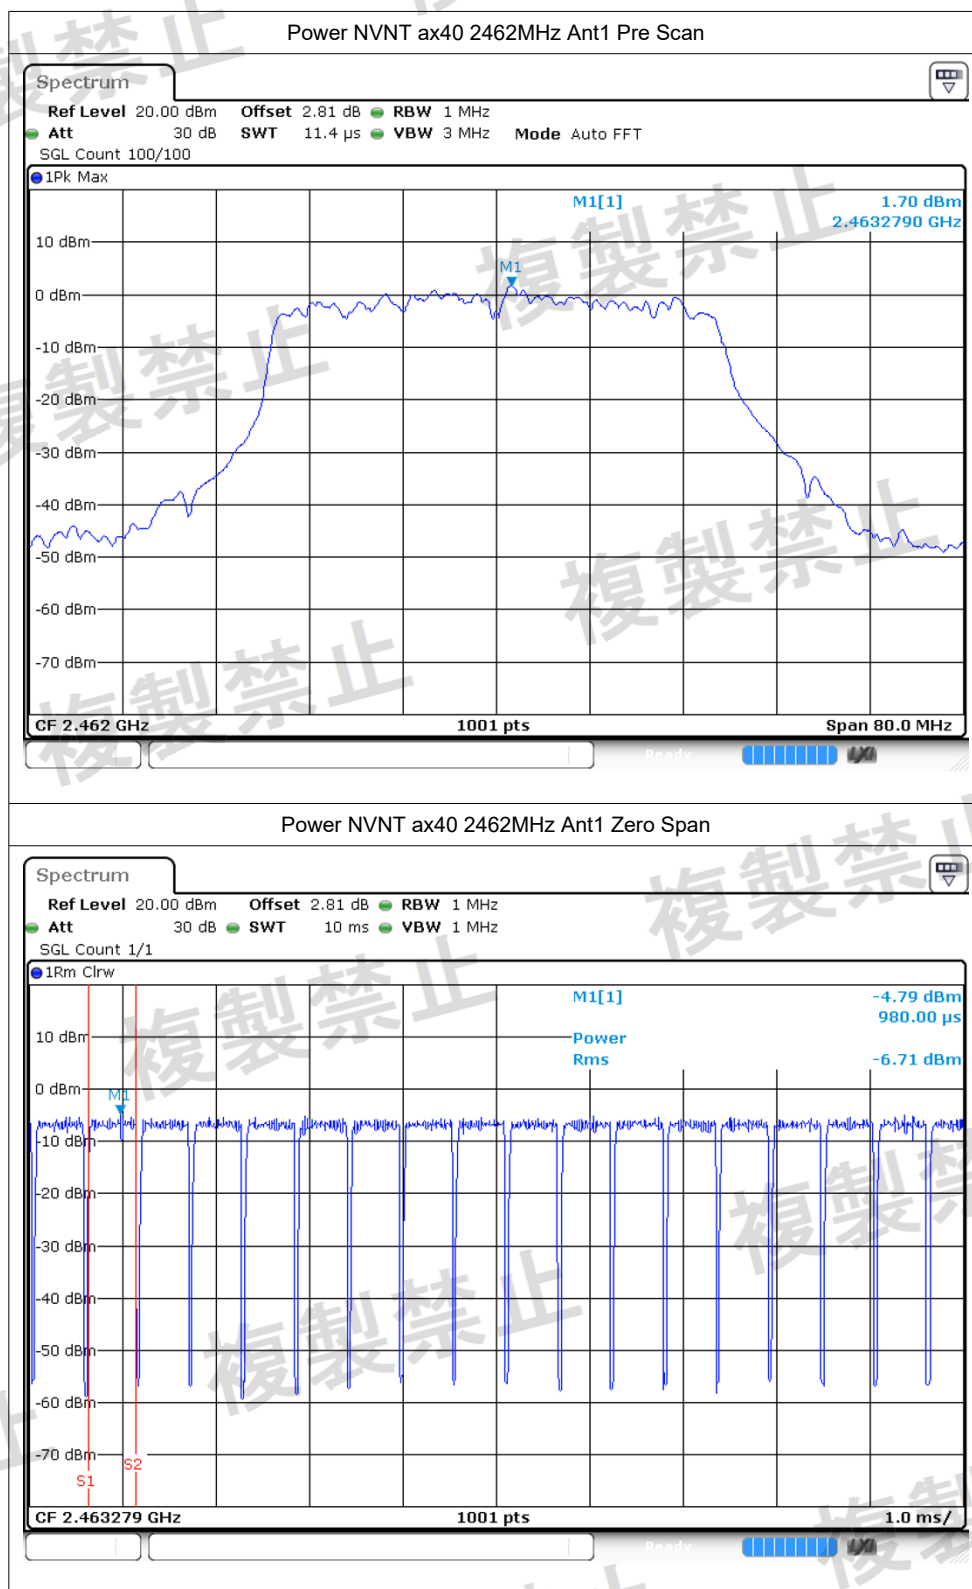



EIRP Power



Condition	Mode	Frequency (MHz)	Antenna	Power (dBm/MHz)	Power (mW/MHz)	Gain (dBi)	EIRP (dBm/MHz)	EIRP (mW/MHz)	Limit (dBm/MHz)	Verdict
NVNT	b	2412	Ant1	0.37	1.089	-5.28	-4.91	0.323	12.14	Pass
NVNT	b	2442	Ant1	-0.32	0.929	-5.28	-5.6	0.275	12.14	Pass
NVNT	b	2472	Ant1	-0.59	0.873	-5.28	-5.87	0.259	12.14	Pass
NVNT	g	2412	Ant1	-2.58	0.552	-5.28	-7.86	0.164	12.14	Pass
NVNT	g	2442	Ant1	-2.11	0.615	-5.28	-7.39	0.182	12.14	Pass
NVNT	g	2472	Ant1	-3.14	0.485	-5.28	-8.42	0.144	12.14	Pass
NVNT	n20	2412	Ant1	-2.38	0.578	-5.28	-7.66	0.171	12.14	Pass
NVNT	n20	2442	Ant1	-2.92	0.511	-5.28	-8.2	0.151	12.14	Pass
NVNT	n20	2472	Ant1	-3.87	0.41	-5.28	-9.15	0.122	12.14	Pass
NVNT	n40	2422	Ant1	-6.15	0.243	-5.28	-11.43	0.072	9.13	Pass
NVNT	n40	2442	Ant1	-5.57	0.277	-5.28	-10.85	0.082	9.13	Pass
NVNT	n40	2462	Ant1	-5.55	0.279	-5.28	-10.83	0.083	9.13	Pass
NVNT	ax20	2412	Ant1	-4.34	0.368	-5.28	-9.62	0.109	12.14	Pass
NVNT	ax20	2442	Ant1	-3.77	0.42	-5.28	-9.05	0.124	12.14	Pass
NVNT	ax20	2472	Ant1	-4.38	0.365	-5.28	-9.66	0.108	12.14	Pass
NVNT	ax40	2422	Ant1	-8.07	0.156	-5.28	-13.35	0.046	9.13	Pass
NVNT	ax40	2442	Ant1	-6.86	0.206	-5.28	-12.14	0.061	9.13	Pass
NVNT	ax40	2462	Ant1	-6.71	0.213	-5.28	-11.99	0.063	9.13	Pass


Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	b	2412	Ant1	13.067
NVNT	b	2442	Ant1	13.107
NVNT	b	2472	Ant1	13.107
NVNT	g	2412	Ant1	16.823
NVNT	g	2442	Ant1	16.703
NVNT	g	2472	Ant1	16.783
NVNT	n20	2412	Ant1	18.142
NVNT	n20	2442	Ant1	18.102
NVNT	n20	2472	Ant1	18.142
NVNT	n40	2422	Ant1	36.124
NVNT	n40	2442	Ant1	36.124
NVNT	n40	2462	Ant1	36.284
NVNT	ax20	2412	Ant1	19.101
NVNT	ax20	2442	Ant1	19.221
NVNT	ax20	2472	Ant1	19.261
NVNT	ax40	2422	Ant1	37.882
NVNT	ax40	2442	Ant1	37.642
NVNT	ax40	2462	Ant1	37.802

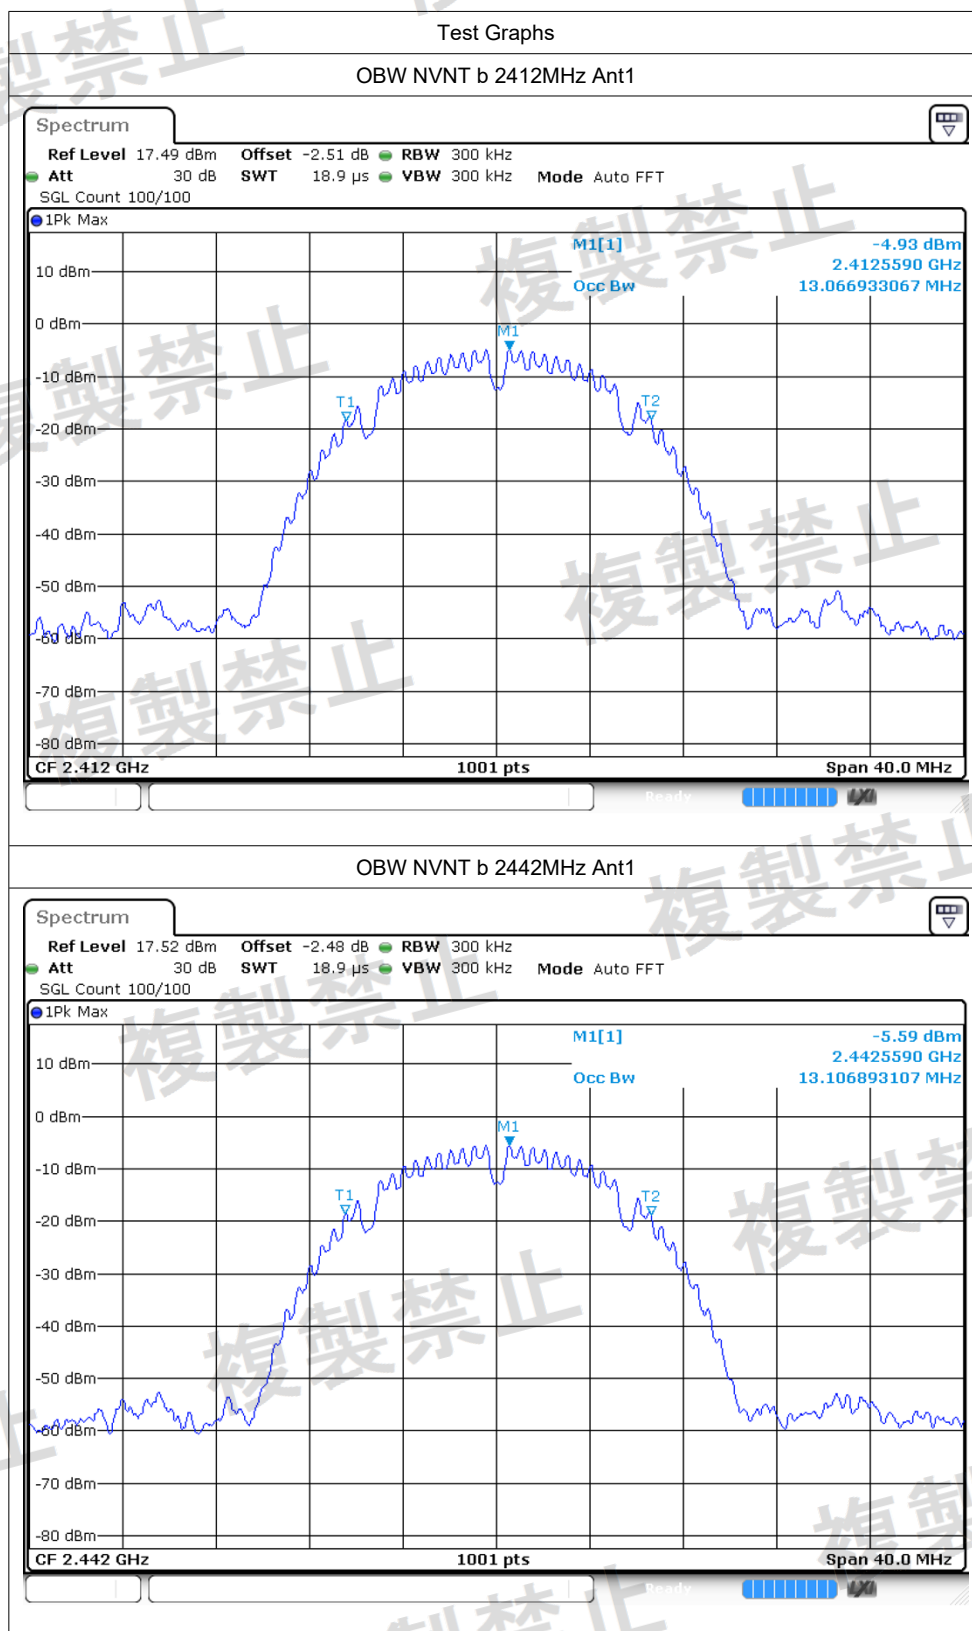


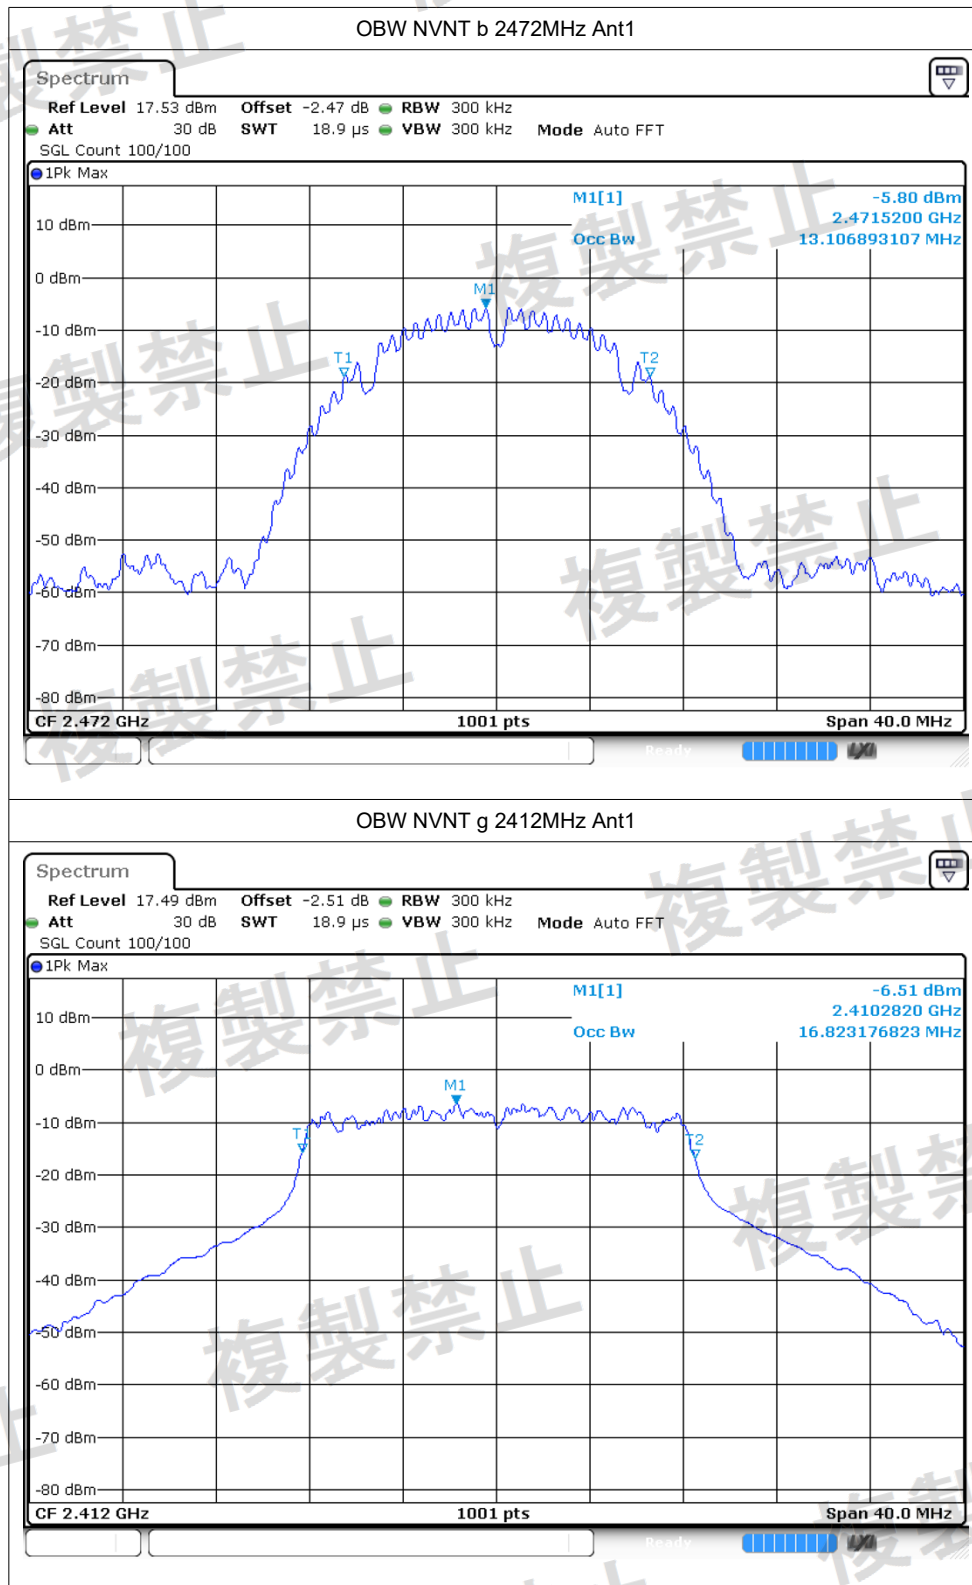


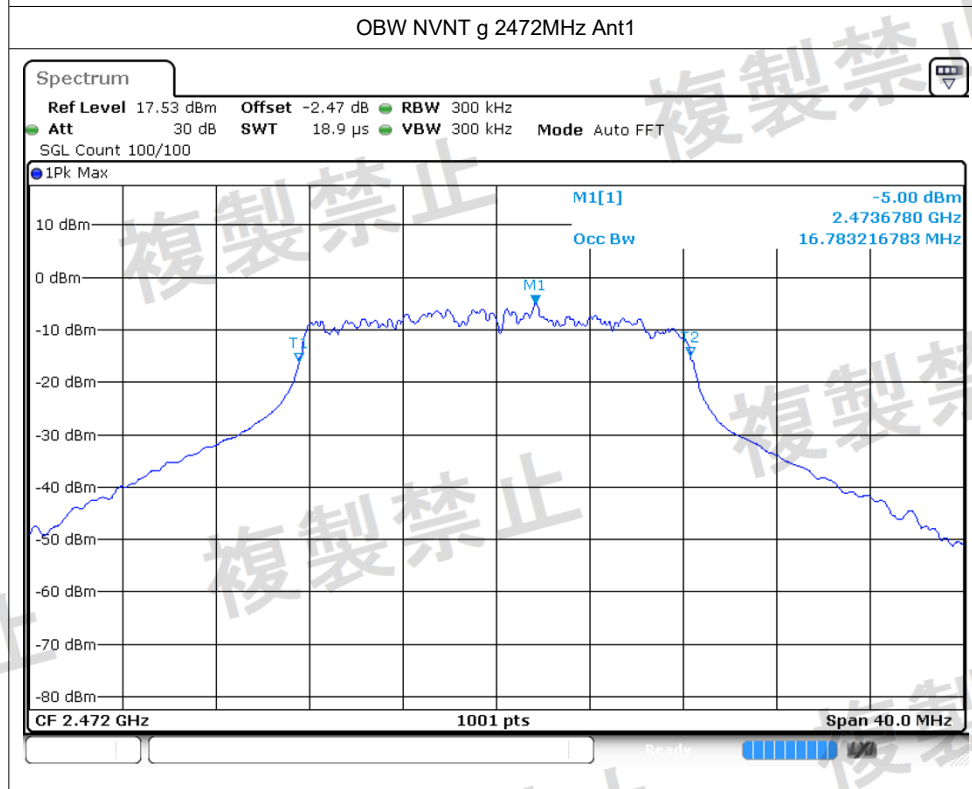
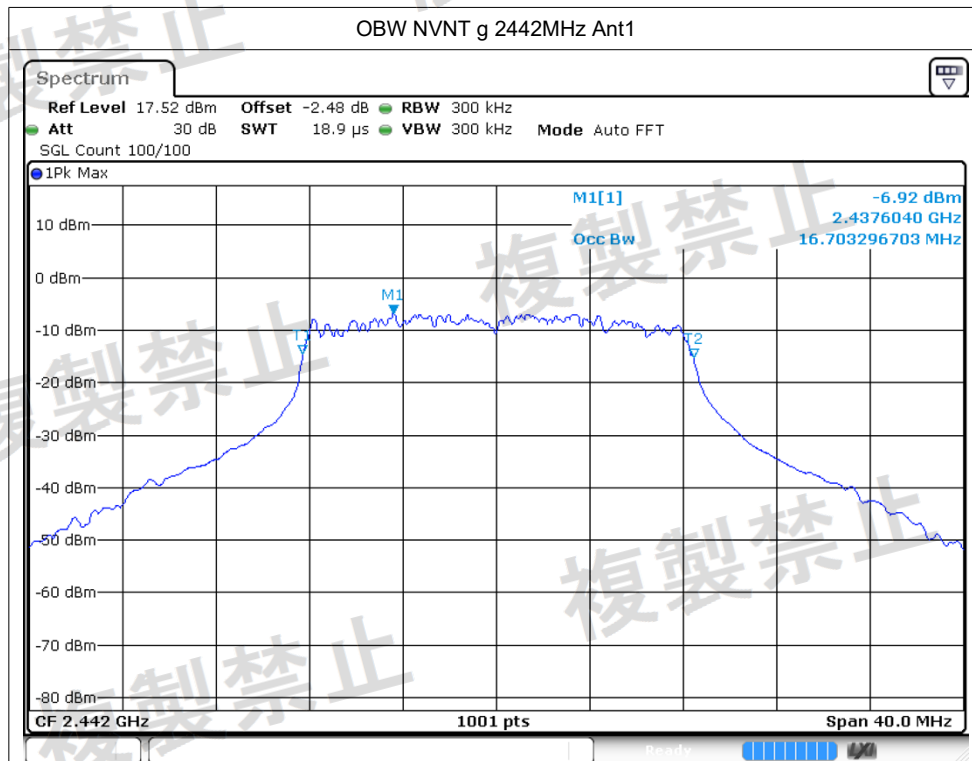


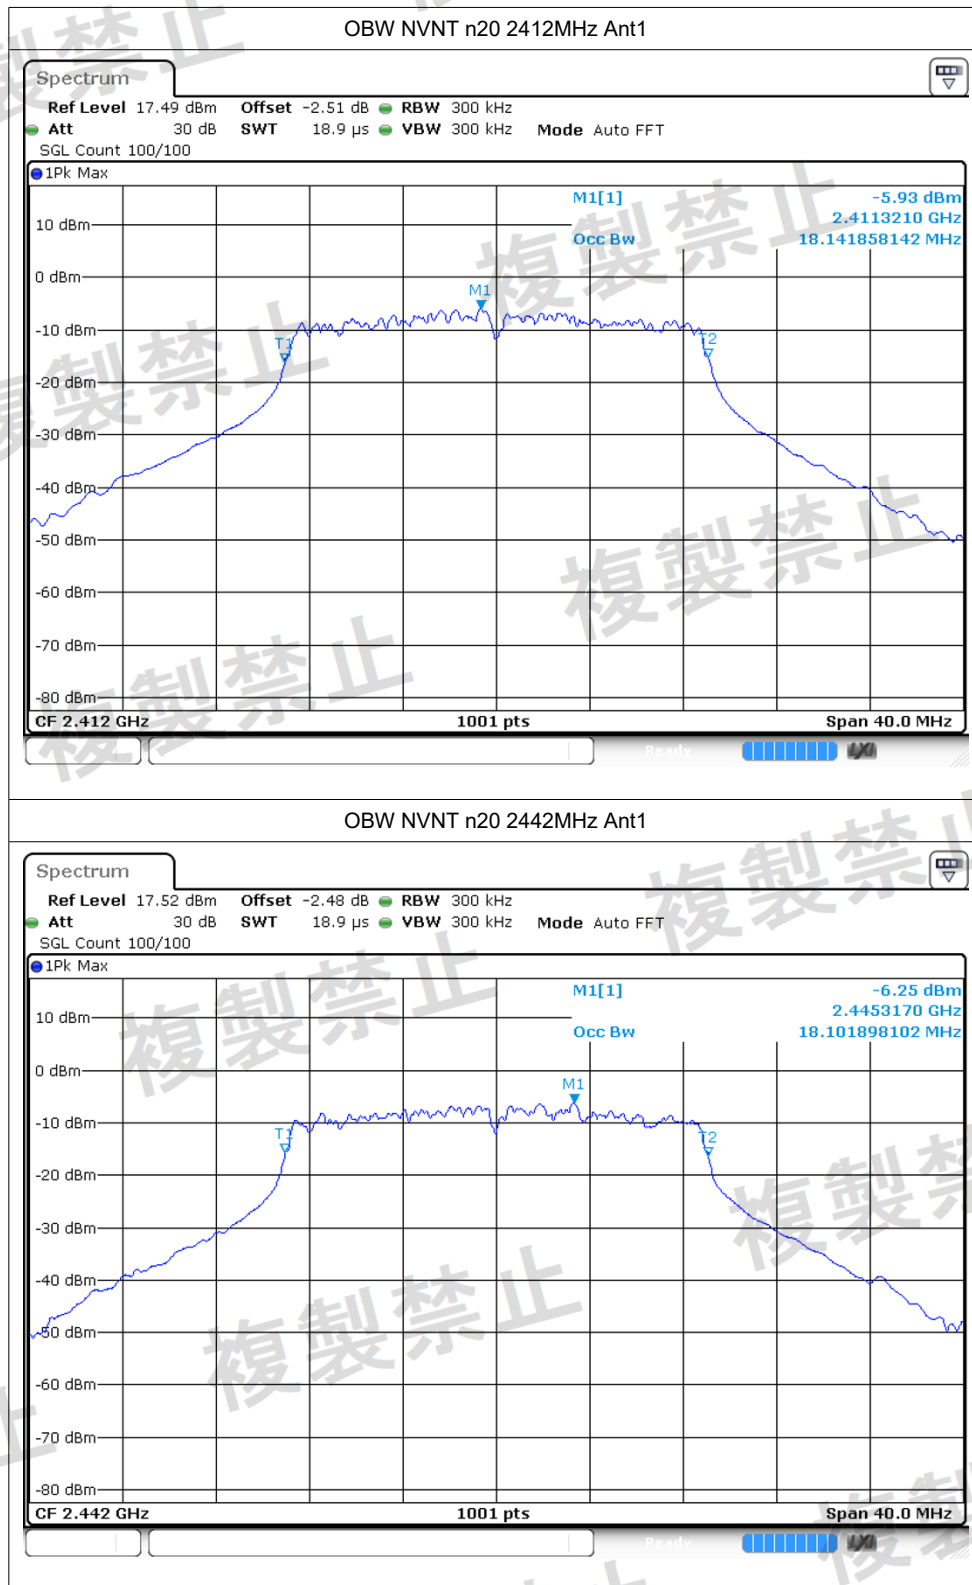


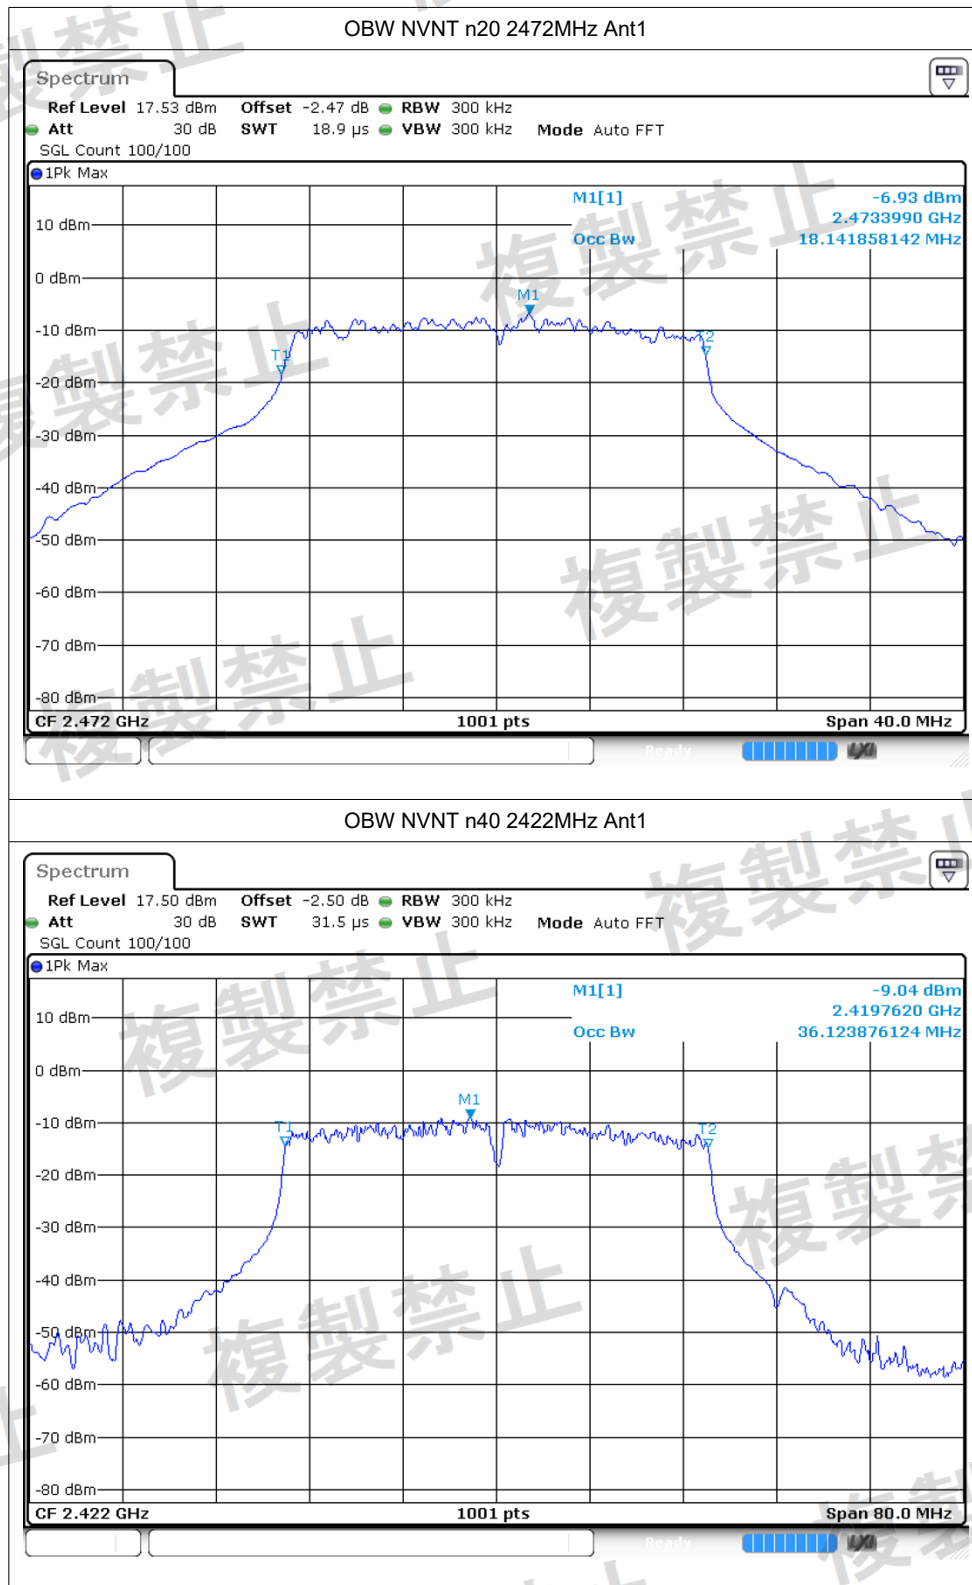

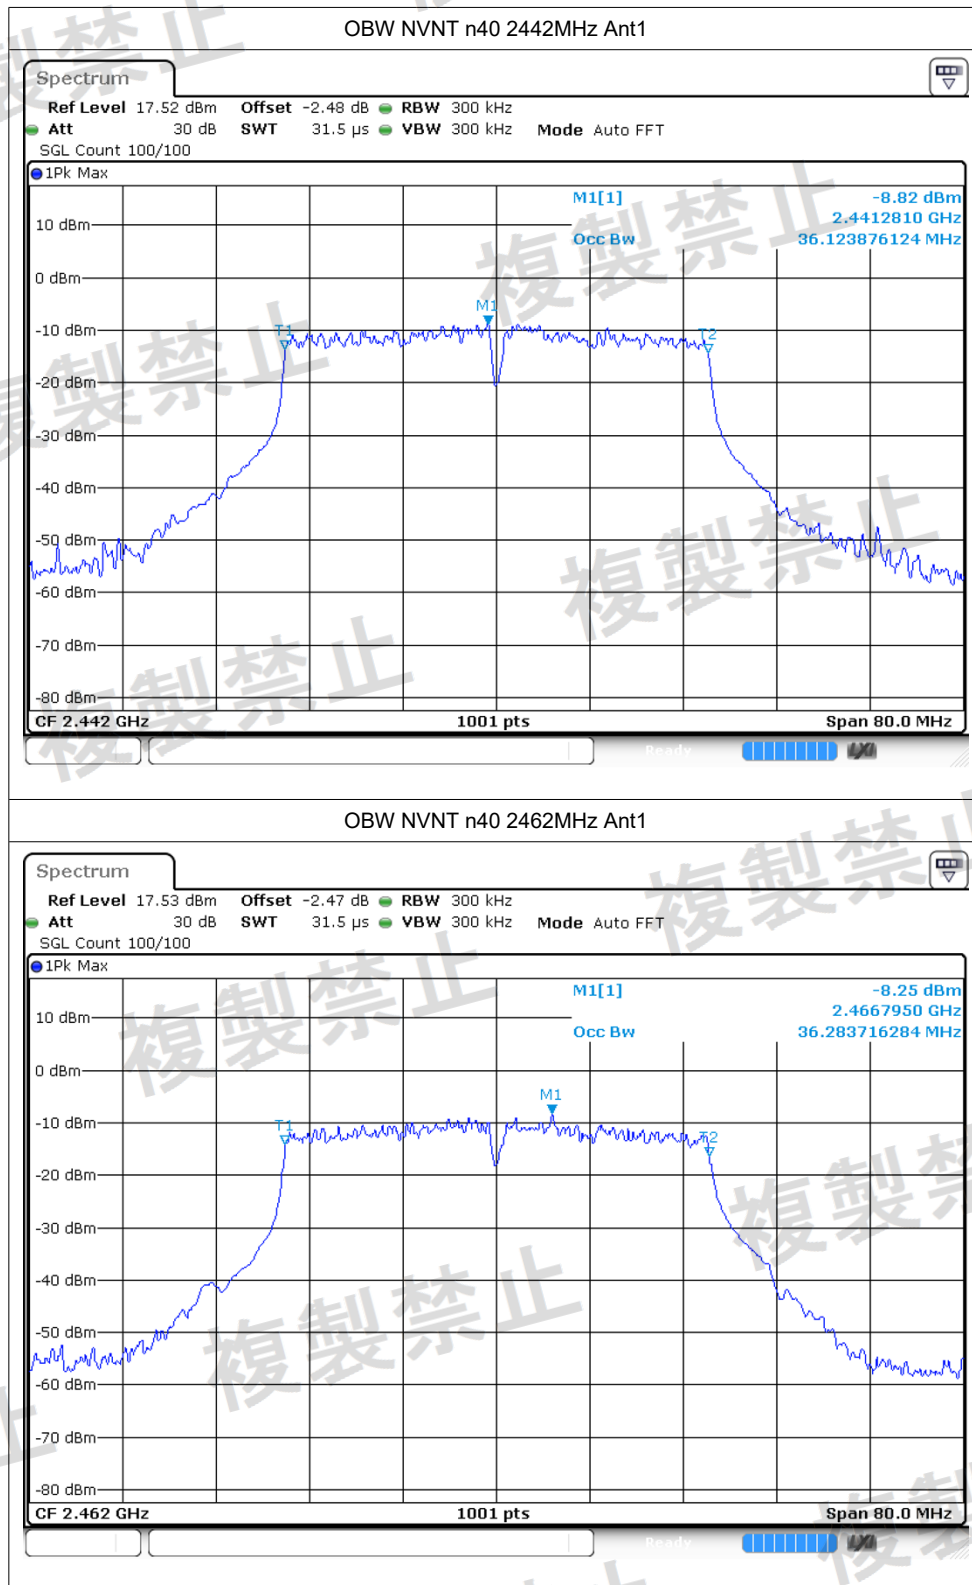

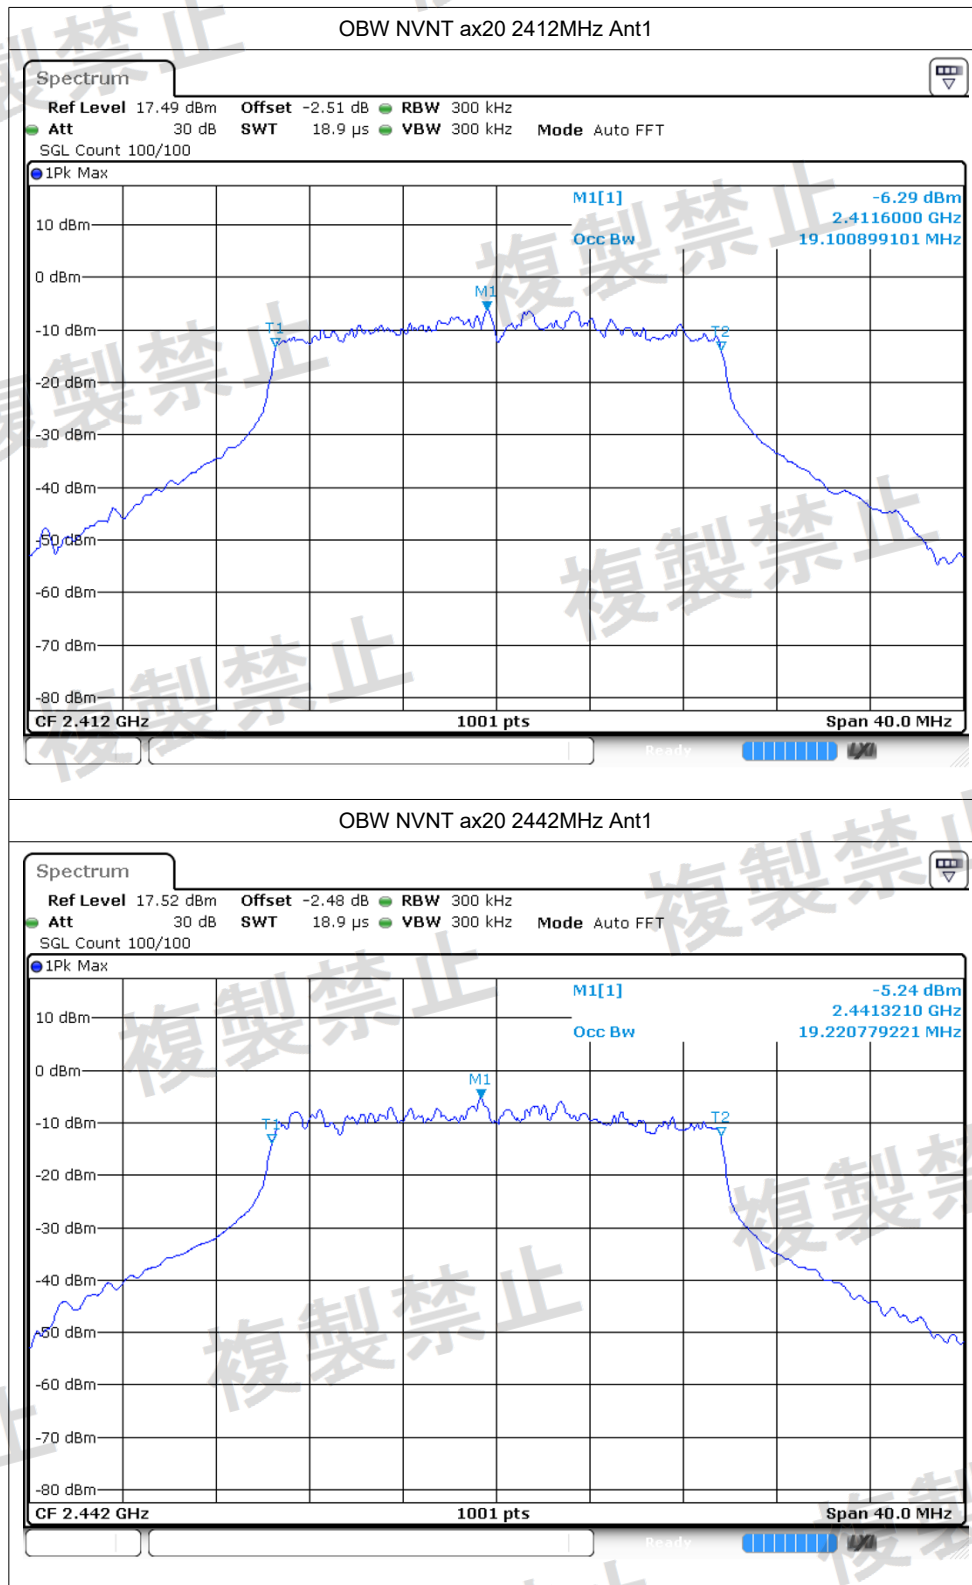


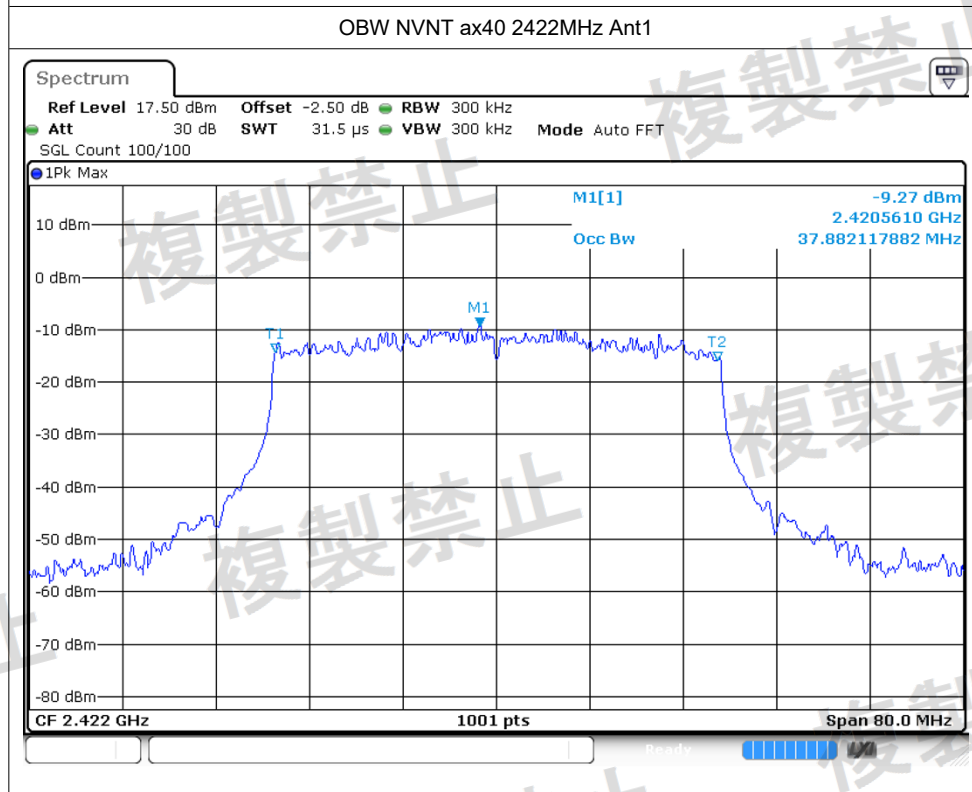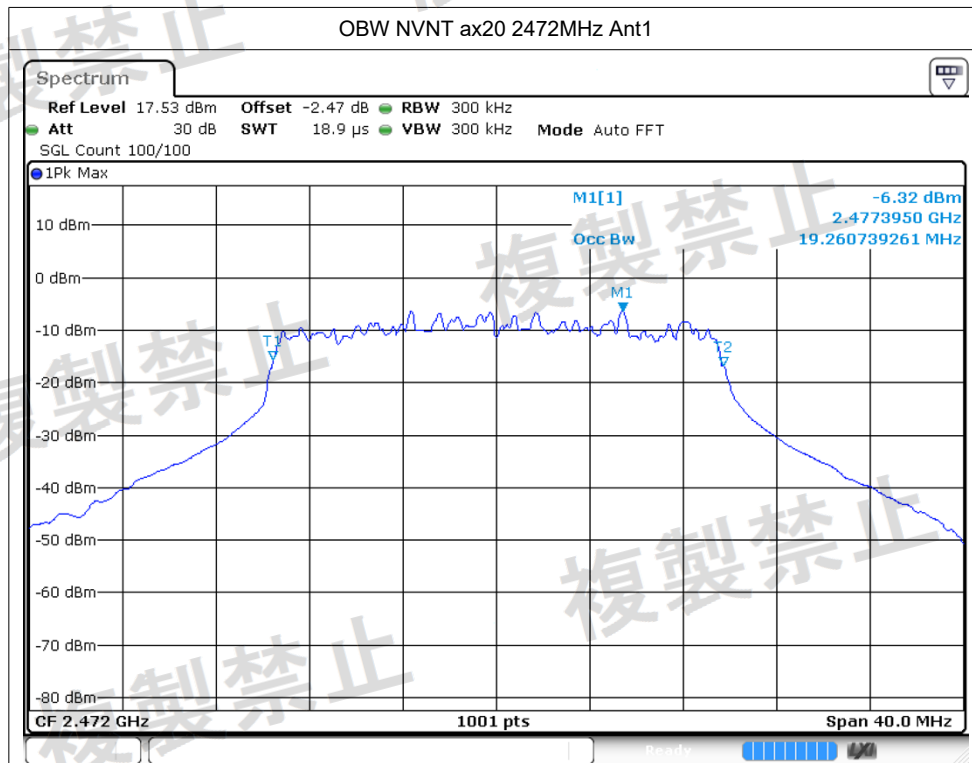


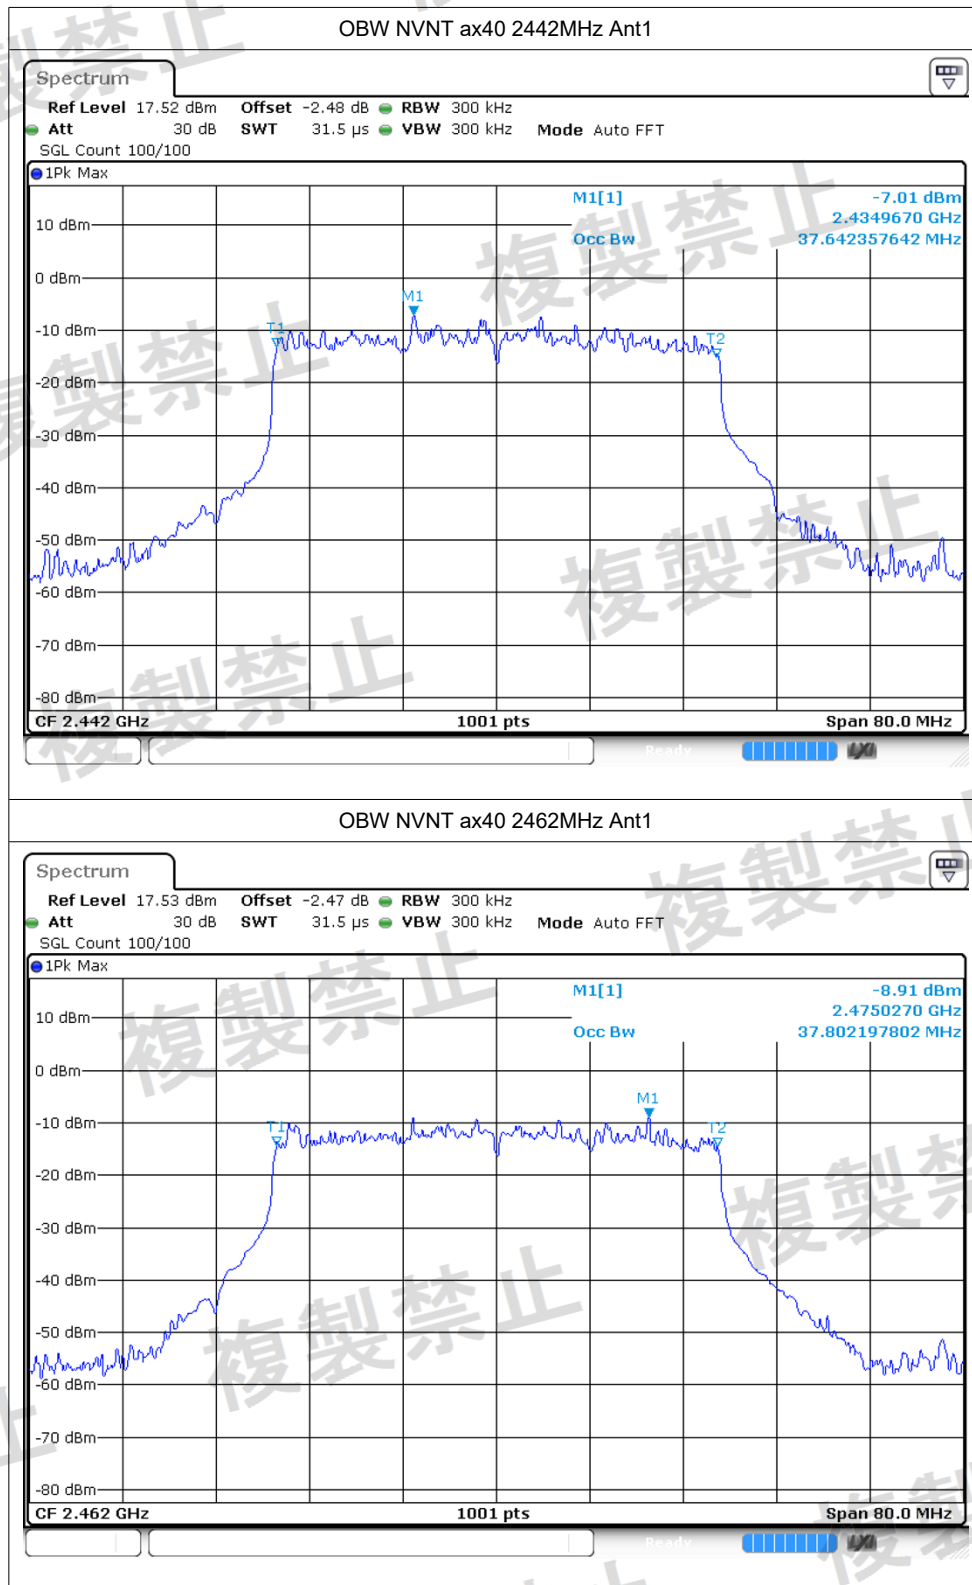



Spreading Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	90% OBW (MHz)	Limit (MHz)	Verdict
NVNT	b	2412	Ant1	8.751	0.5	Pass
NVNT	b	2442	Ant1	8.791	0.5	Pass
NVNT	b	2472	Ant1	8.791	0.5	Pass
NVNT	g	2412	Ant1	14.386	0.5	Pass
NVNT	g	2442	Ant1	14.705	0.5	Pass
NVNT	g	2472	Ant1	14.466	0.5	Pass
NVNT	n20	2412	Ant1	15.305	0.5	Pass
NVNT	n20	2442	Ant1	15.624	0.5	Pass
NVNT	n20	2472	Ant1	15.784	0.5	Pass
NVNT	n40	2422	Ant1	31.489	0.5	Pass
NVNT	n40	2442	Ant1	32.527	0.5	Pass
NVNT	n40	2462	Ant1	31.728	0.5	Pass
NVNT	ax20	2412	Ant1	16.703	0.5	Pass
NVNT	ax20	2442	Ant1	16.663	0.5	Pass
NVNT	ax20	2472	Ant1	17.023	0.5	Pass
NVNT	ax40	2422	Ant1	32.368	0.5	Pass
NVNT	ax40	2442	Ant1	33.726	0.5	Pass
NVNT	ax40	2462	Ant1	32.687	0.5	Pass


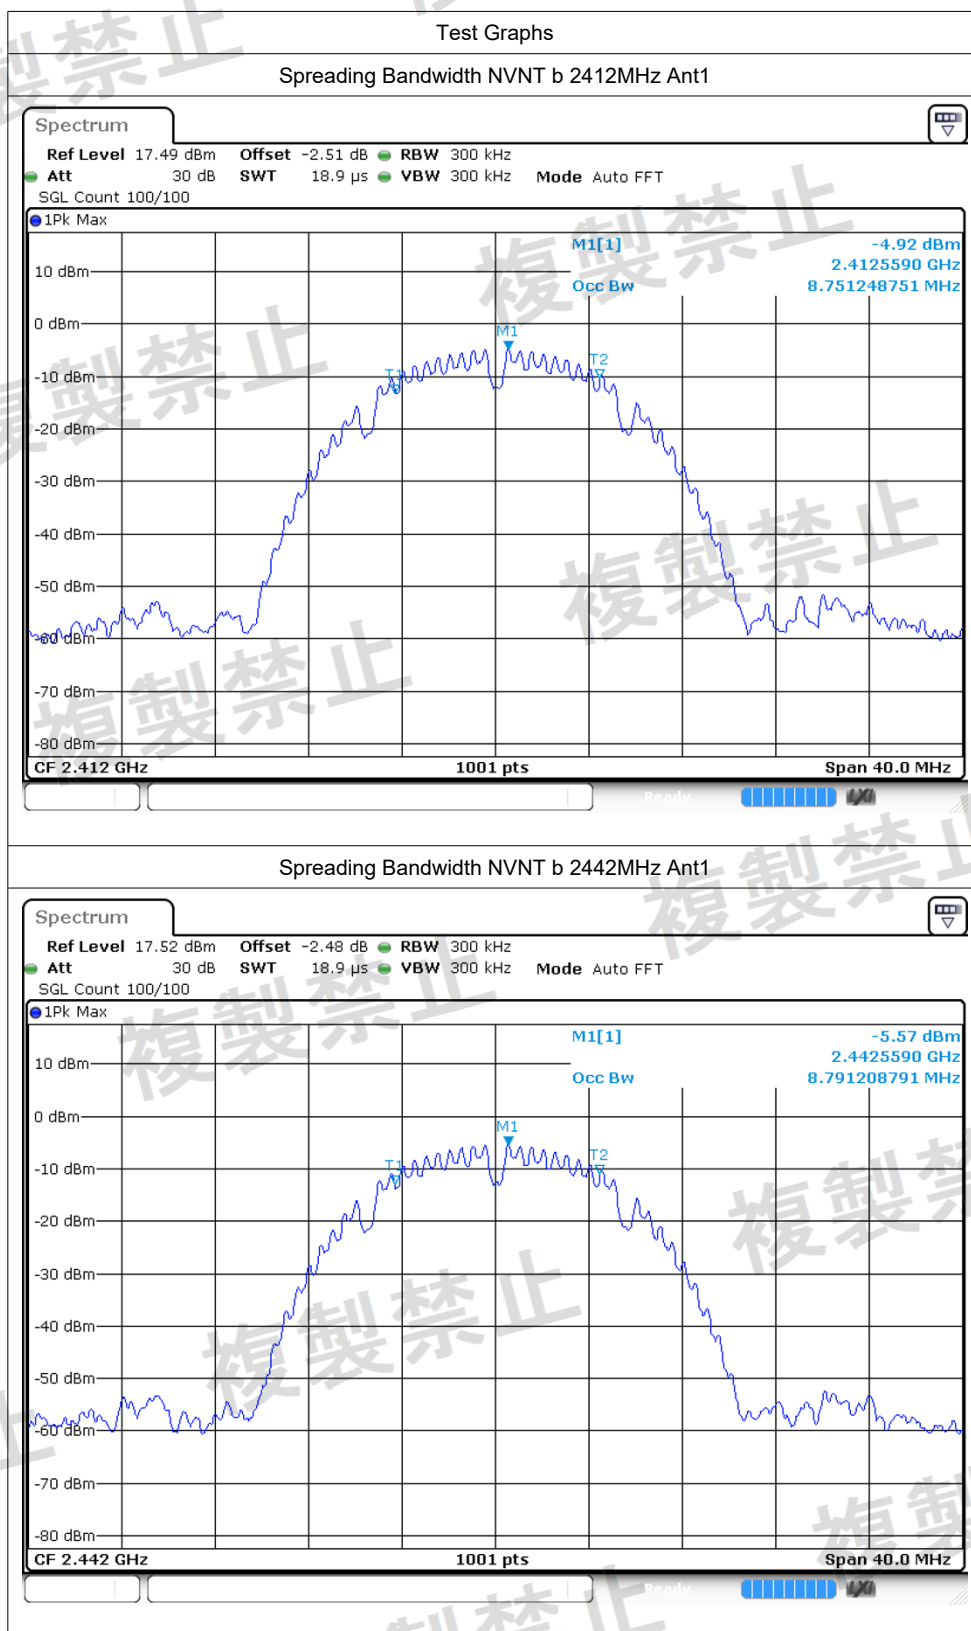


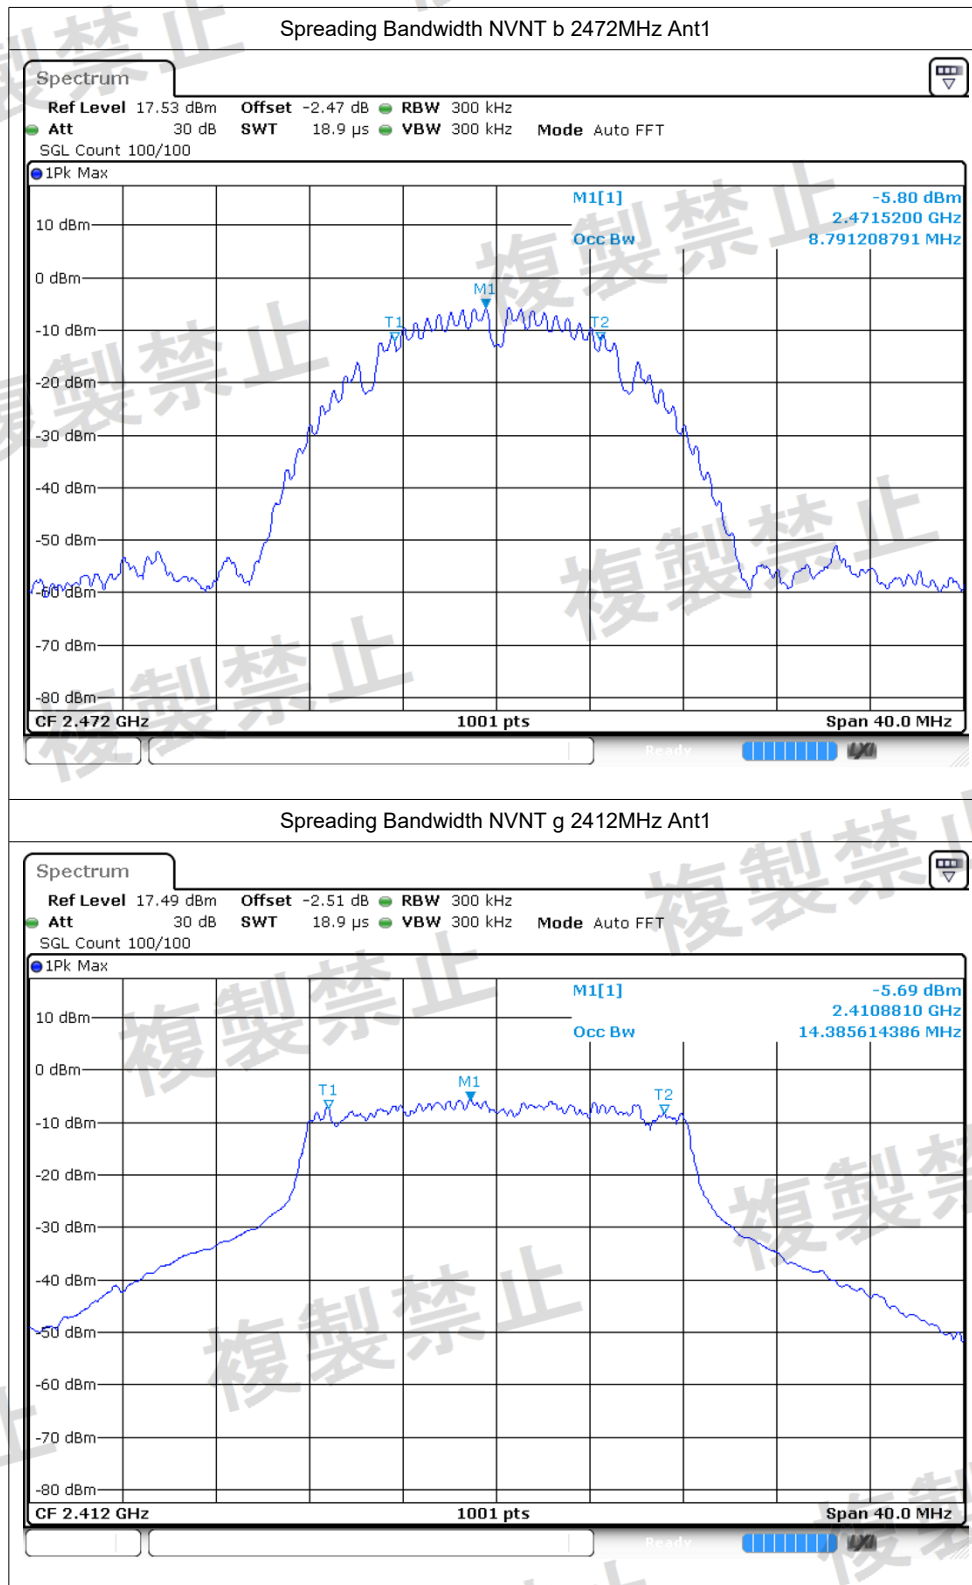



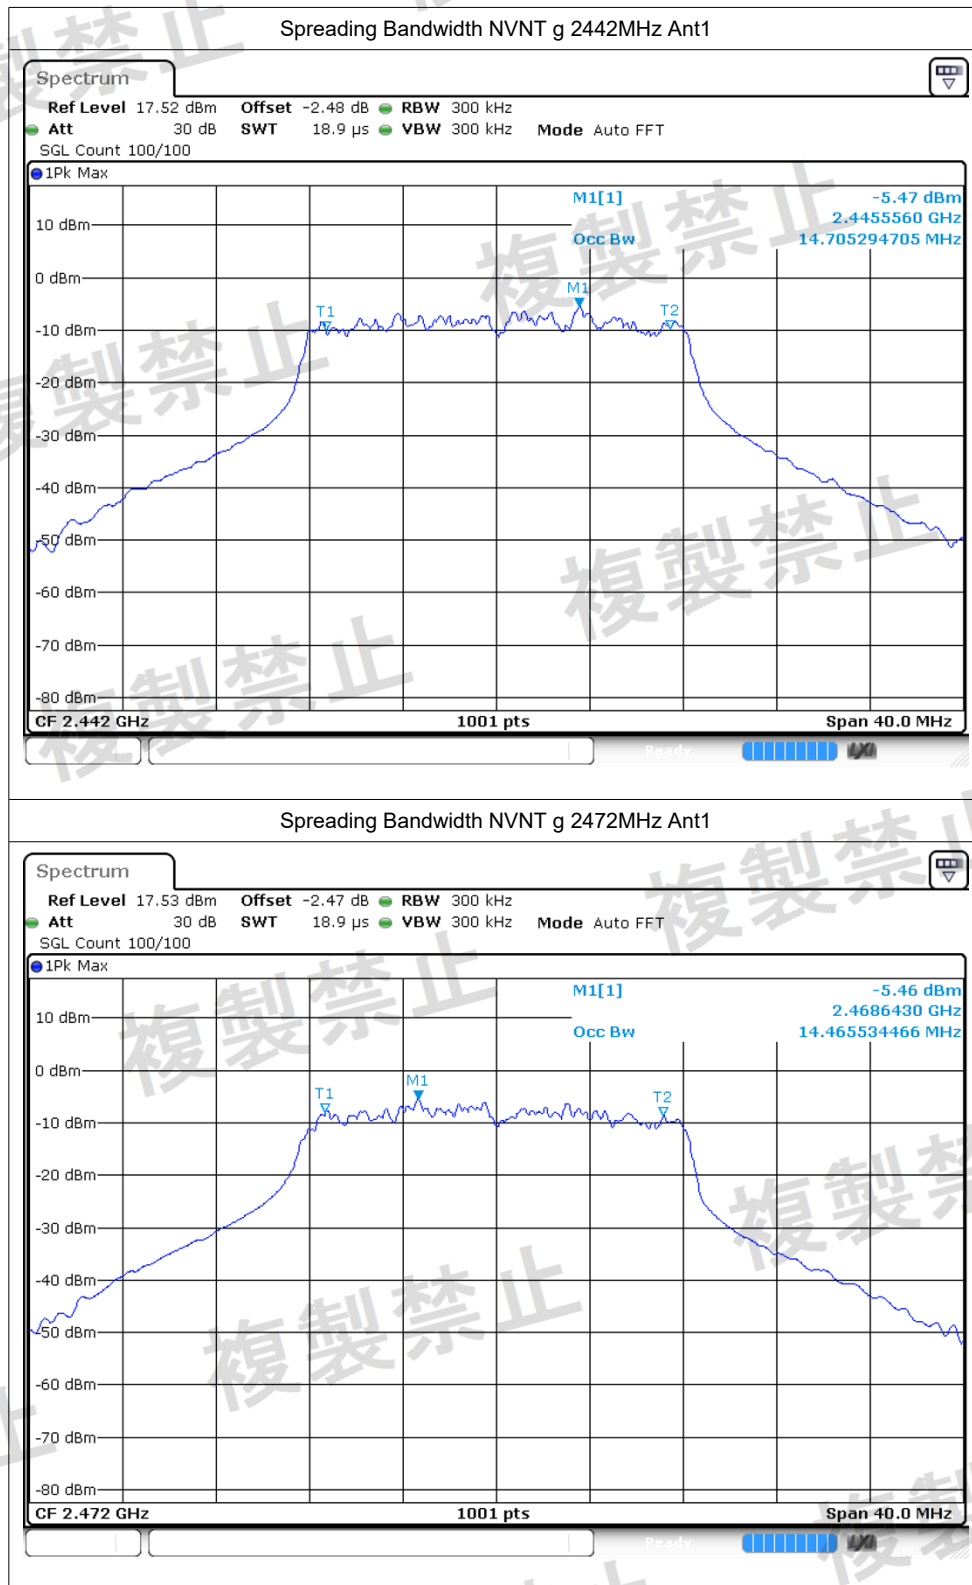



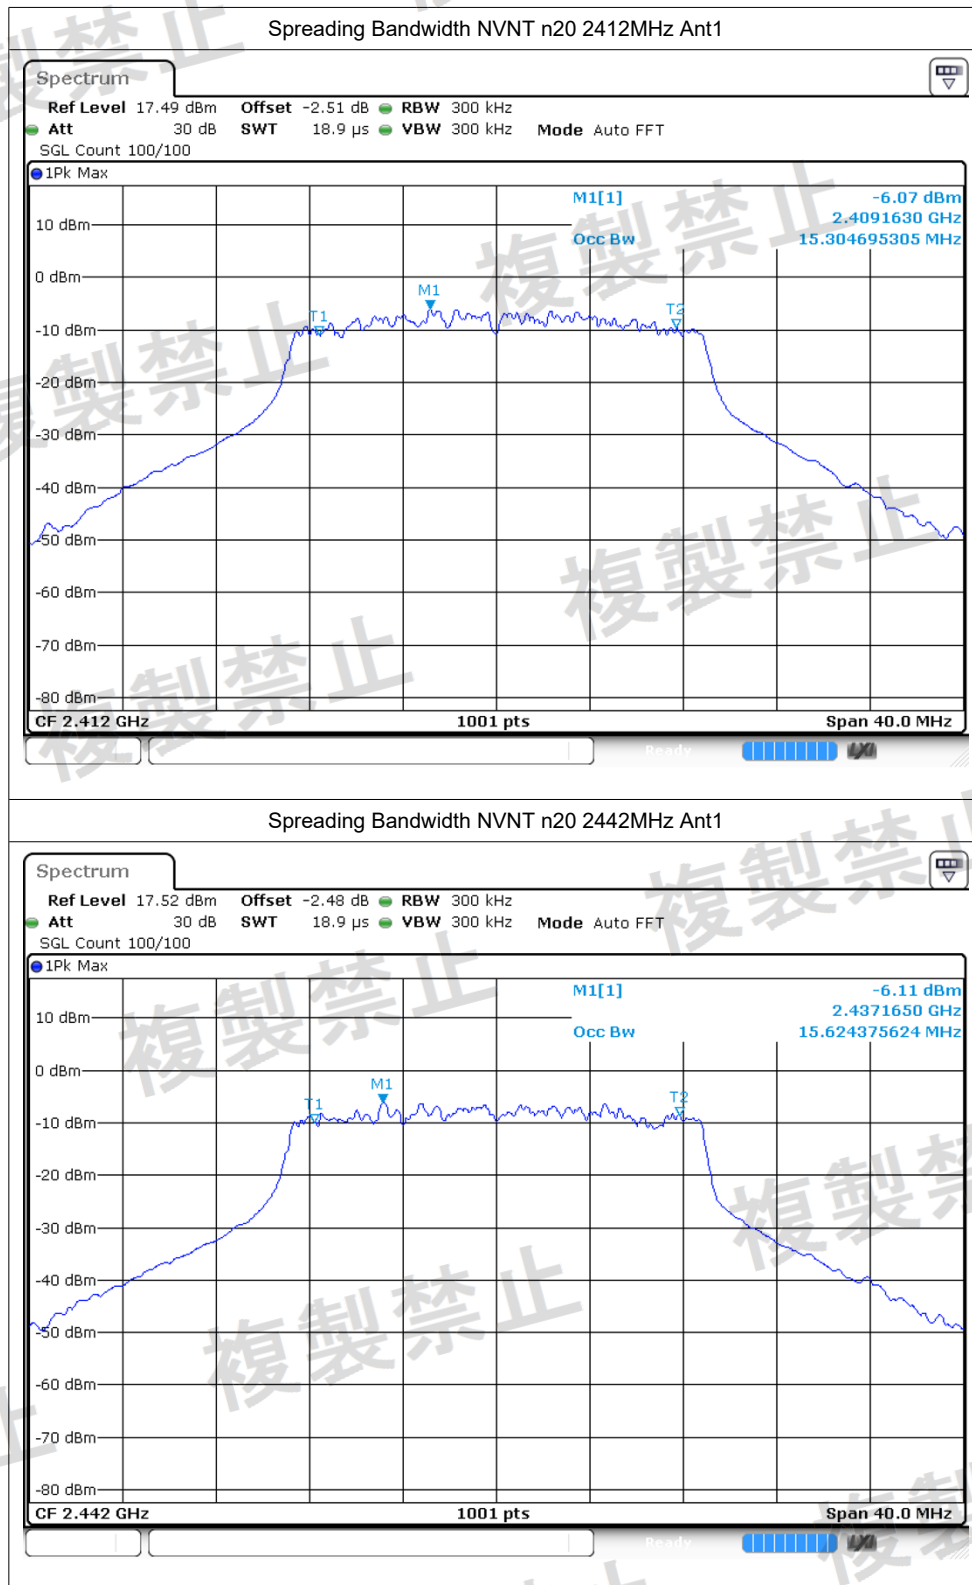


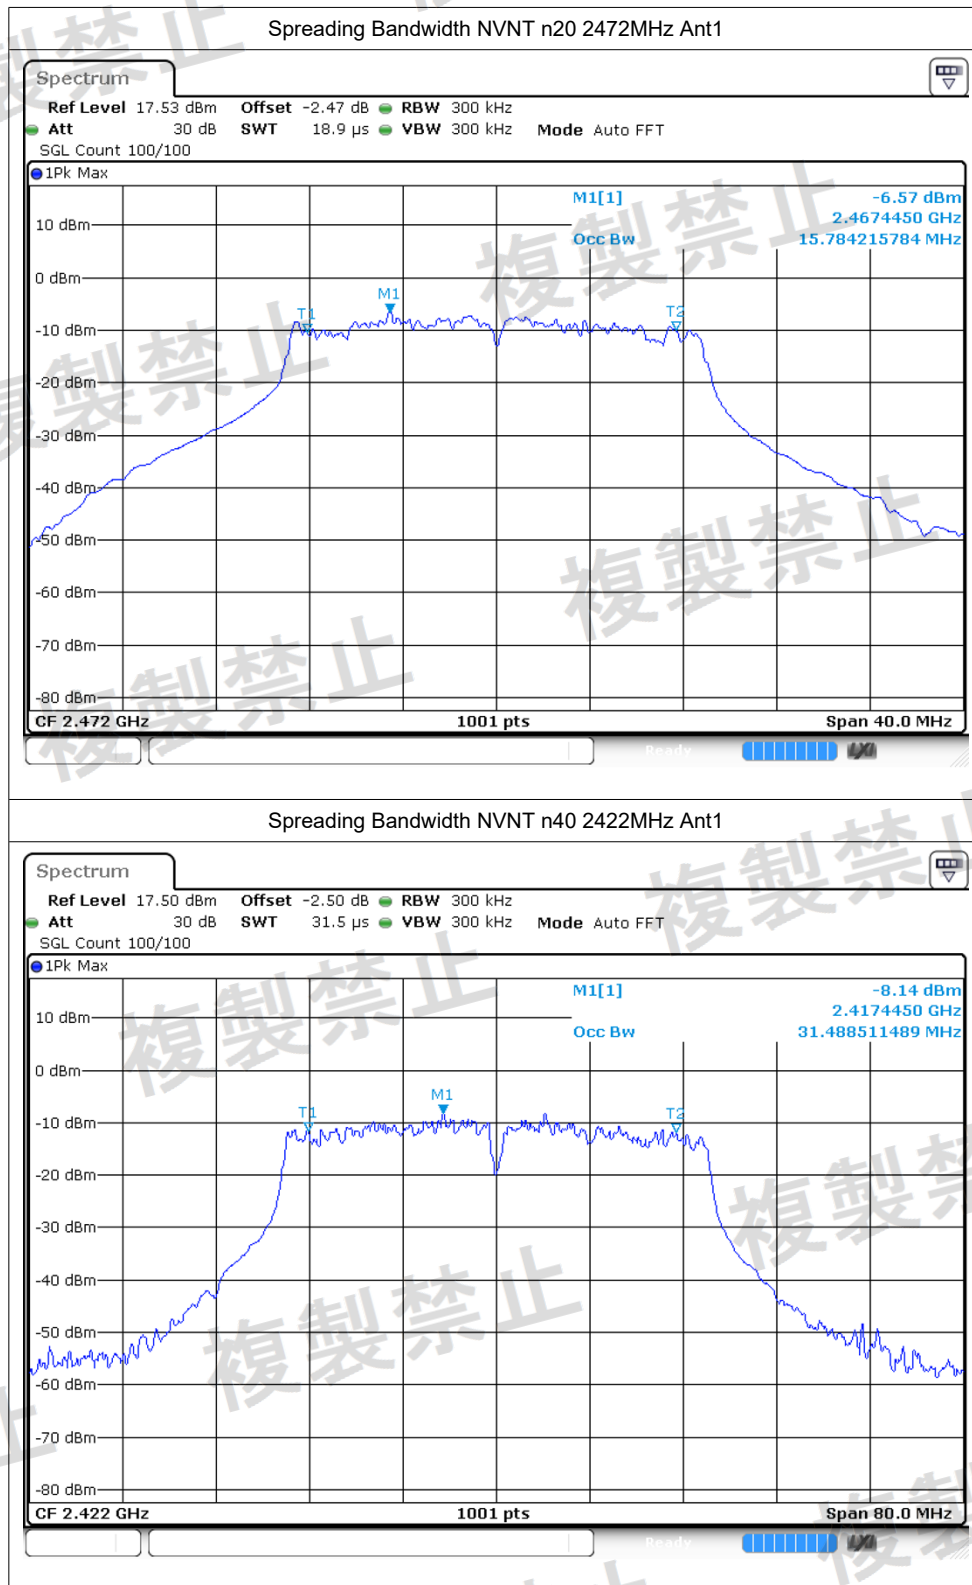

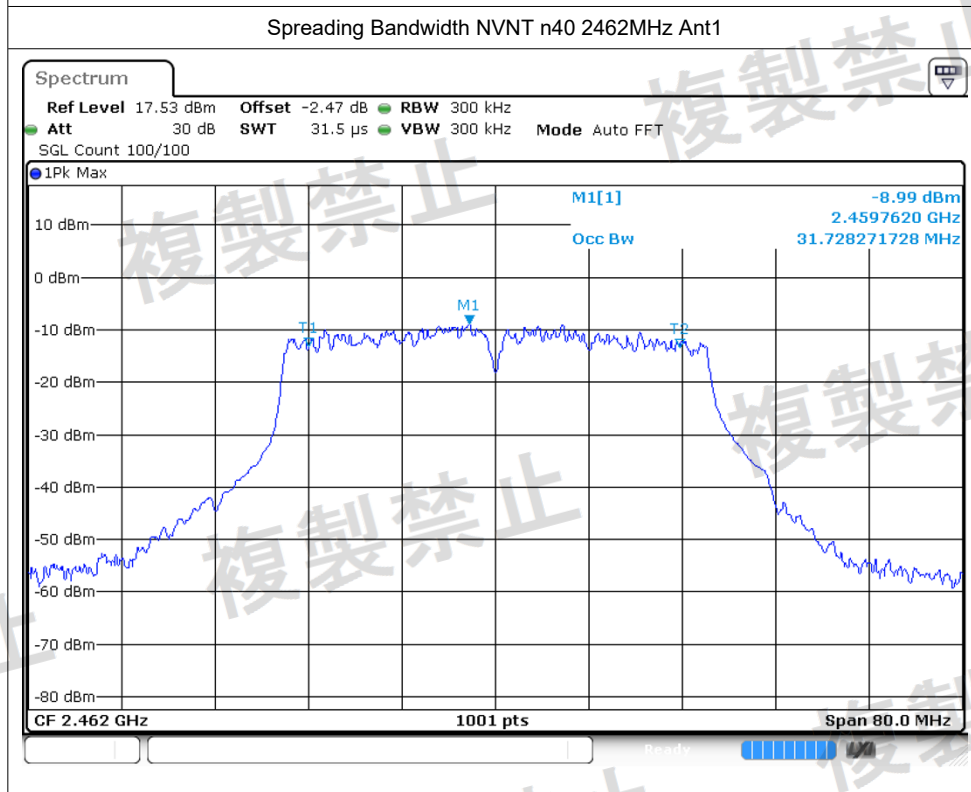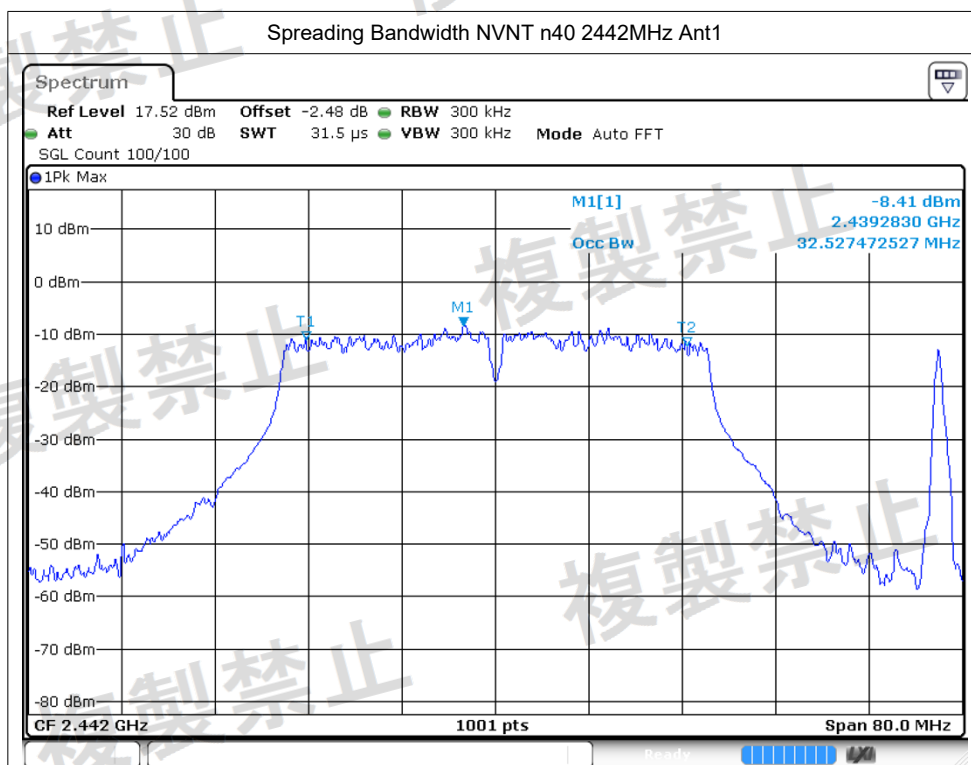

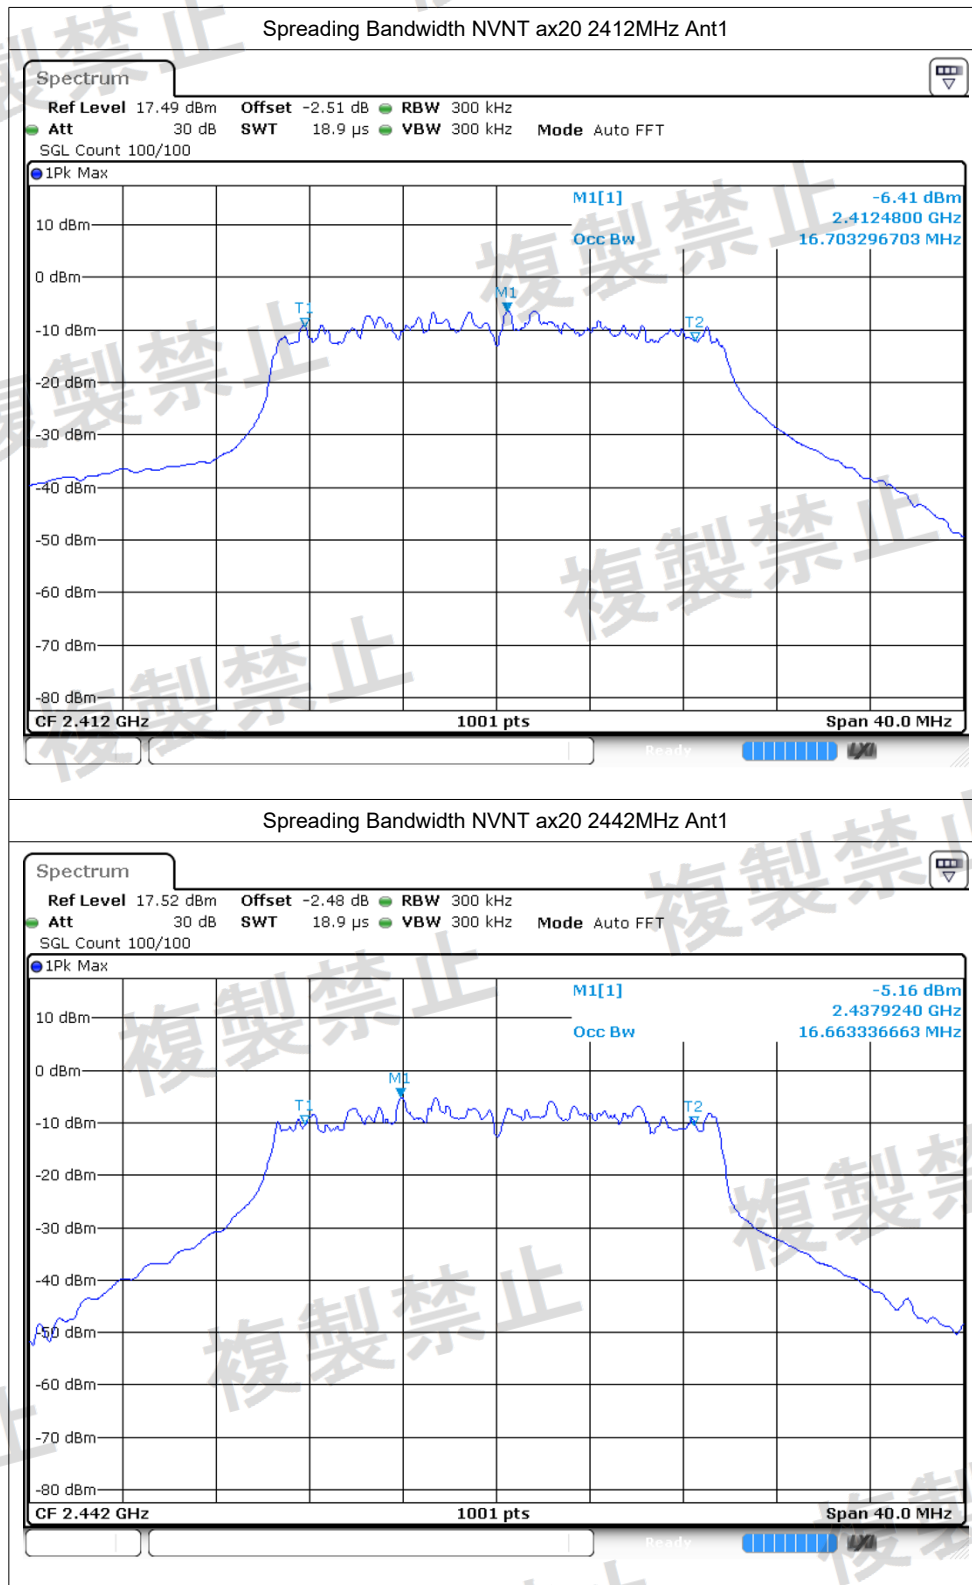

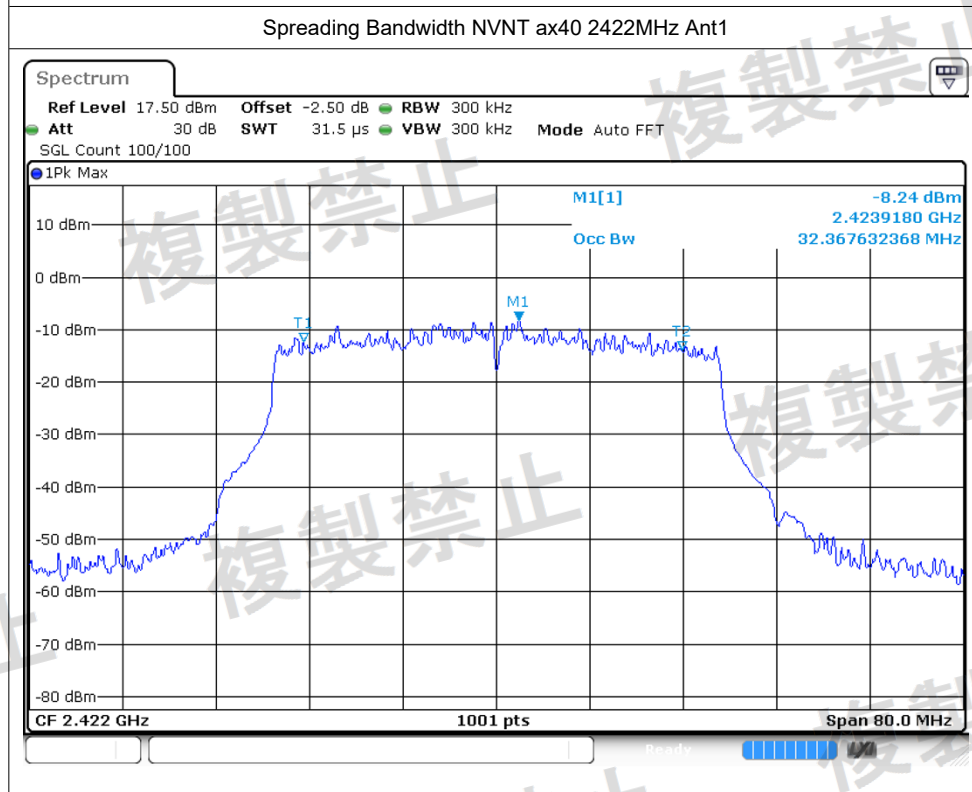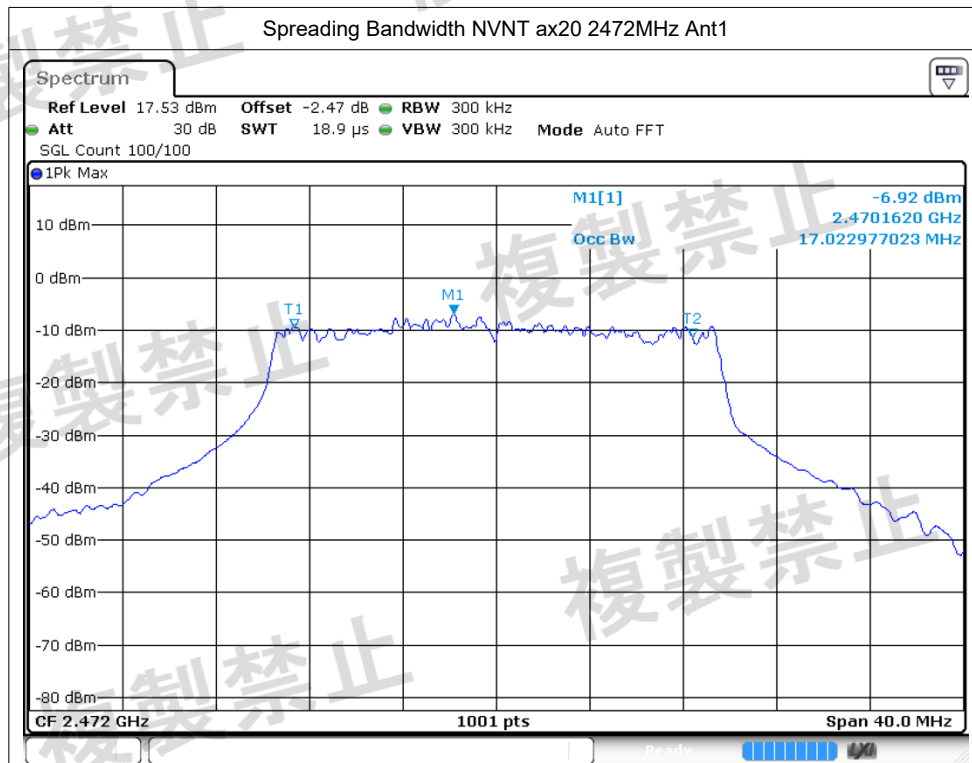

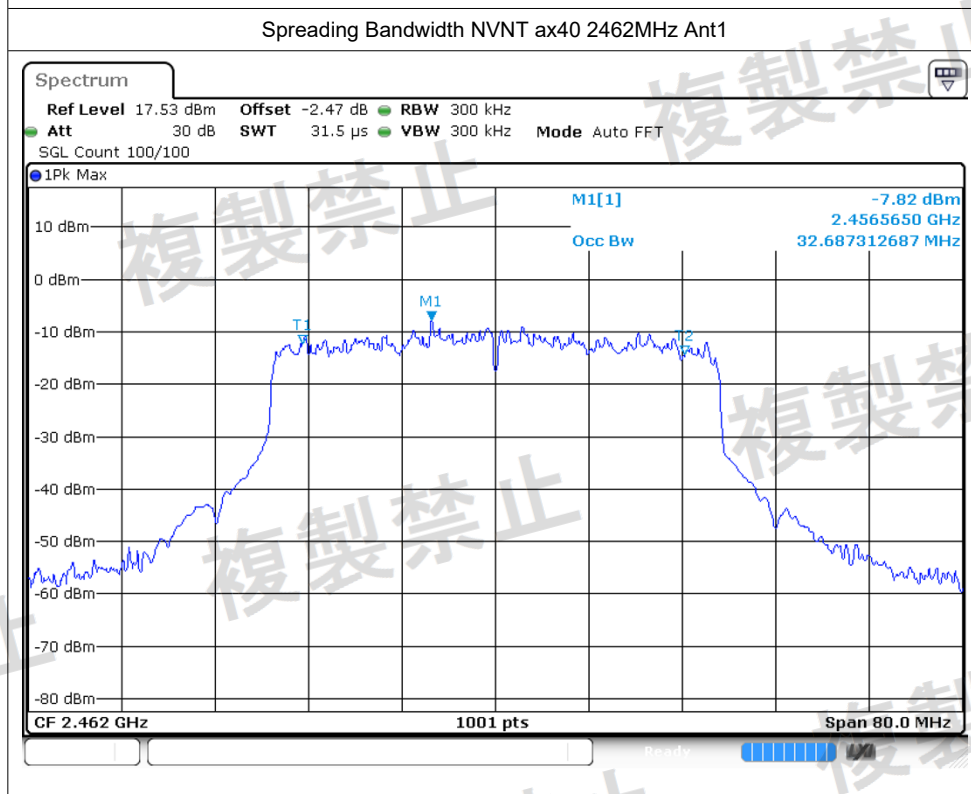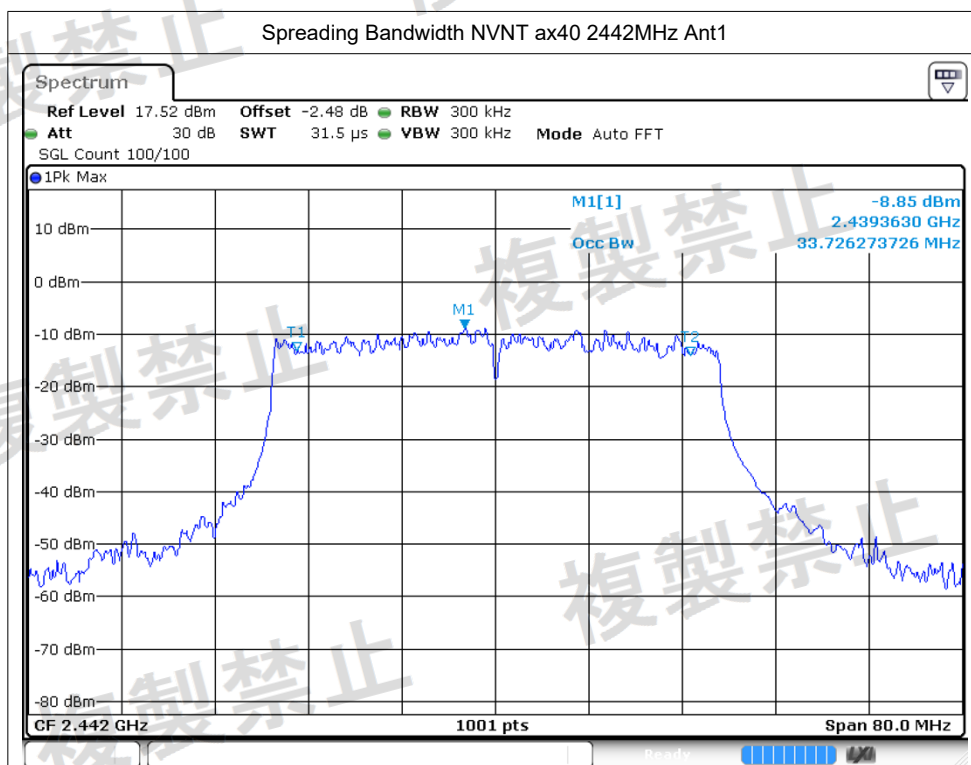

Tx Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Range (MHz)	Emission Frequency (MHz)	Max Peak Value (dBm)	Max RMS Value (dBm)	Max Peak Value (uW)	Max RMS Value (uW)	Limit Start(uW)	Limit Stop (uW)	Verdict
NVNT	b	2412	Ant1	30-1000	811.88	-58.18	NA	0.0015	NA	2.5	2.5	Pass
NVNT	b	2412	Ant1	1000-2387	2380.11	-57.52	NA	0.0018	NA	2.5	2.5	Pass
NVNT	b	2412	Ant1	2387-2400	2397.33	-51.72	NA	0.0067	NA	25	25	Pass
NVNT	b	2412	Ant1	2483.5-2496.5	2493.47	-58.98	NA	0.0013	NA	25	25	Pass
NVNT	b	2412	Ant1	2496.5-13000	4824.08	-44.49	NA	0.0356	NA	2.5	2.5	Pass
NVNT	b	2442	Ant1	30-1000	810.49	-58.54	NA	0.0014	NA	2.5	2.5	Pass
NVNT	b	2442	Ant1	1000-2387	2380.02	-57.61	NA	0.0017	NA	2.5	2.5	Pass
NVNT	b	2442	Ant1	2387-2400	2395.43	-59.77	NA	0.0011	NA	25	25	Pass
NVNT	b	2442	Ant1	2483.5-2496.5	2484.58	-57.58	NA	0.0017	NA	25	25	Pass
NVNT	b	2442	Ant1	2496.5-13000	4884.30	-44.33	NA	0.0369	NA	2.5	2.5	Pass
NVNT	b	2472	Ant1	30-1000	710.36	-58.55	NA	0.0014	NA	2.5	2.5	Pass
NVNT	b	2472	Ant1	1000-2387	2364.67	-59.56	NA	0.0011	NA	2.5	2.5	Pass
NVNT	b	2472	Ant1	2387-2400	2392.55	-61.47	NA	0.0007	NA	25	25	Pass
NVNT	b	2472	Ant1	2483.5-2496.5	2486.71	-51.59	NA	0.0069	NA	25	25	Pass
NVNT	b	2472	Ant1	2496.5-13000	4944.17	-42.46	NA	0.0568	NA	2.5	2.5	Pass
NVNT	g	2412	Ant1	30-1000	707.55	-57.10	NA	0.0019	NA	2.5	2.5	Pass
NVNT	g	2412	Ant1	1000-2387	2216.40	-41.39	NA	0.0726	NA	2.5	2.5	Pass
NVNT	g	2412	Ant1	2387-2400	2400.00	-26.57	NA	2.2029	NA	25	25	Pass
NVNT	g	2412	Ant1	2483.5-2496.5	2489.65	-59.97	NA	0.001	NA	25	25	Pass
NVNT	g	2412	Ant1	2496.5-13000	4826.18	-42.19	NA	0.0604	NA	2.5	2.5	Pass
NVNT	g	2442	Ant1	30-1000	793.36	-57.98	NA	0.0016	NA	2.5	2.5	Pass
NVNT	g	2442	Ant1	1000-2387	2295.83	-41.18	NA	0.0762	NA	2.5	2.5	Pass
NVNT	g	2442	Ant1	2387-2400	2397.36	-56.80	NA	0.0021	NA	25	25	Pass
NVNT	g	2442	Ant1	2483.5-2496.5	2490.22	-57.57	NA	0.0017	NA	25	25	Pass
NVNT	g	2442	Ant1	2496.5-13000	2532.21	-42.01	NA	0.063	NA	2.5	2.5	Pass
NVNT	g	2472	Ant1	30-1000	710.13	-58.06	NA	0.0016	NA	2.5	2.5	Pass
NVNT	g	2472	Ant1	1000-2387	2273.22	-40.62	NA	0.0867	NA	2.5	2.5	Pass
NVNT	g	2472	Ant1	2387-2400	2392.78	-59.50	NA	0.0011	NA	25	25	Pass
NVNT	g	2472	Ant1	2483.5-2496.5	2483.50	-23.97	NA	4.0087	NA	25	25	Pass
NVNT	g	2472	Ant1	2496.5-13000	4951.52	-40.71	NA	0.0849	NA	2.5	2.5	Pass
NVNT	n20	2412	Ant1	30-1000	950.34	-57.59	NA	0.0017	NA	2.5	2.5	Pass
NVNT	n20	2412	Ant1	1000-2387	2238.96	-40.37	NA	0.0918	NA	2.5	2.5	Pass
NVNT	n20	2412	Ant1	2387-2400	2400.00	-25.15	NA	3.0549	NA	25	25	Pass
NVNT	n20	2412	Ant1	2483.5-2496.5	2488.73	-60.98	NA	0.0008	NA	25	25	Pass
NVNT	n20	2412	Ant1	2496.5-13000	4824.08	-43.31	NA	0.0467	NA	2.5	2.5	Pass
NVNT	n20	2442	Ant1	30-1000	949.33	-58.19	NA	0.0015	NA	2.5	2.5	Pass
NVNT	n20	2442	Ant1	1000-2387	2248.12	-40.65	NA	0.0861	NA	2.5	2.5	Pass
NVNT	n20	2442	Ant1	2387-2400	2397.77	-58.40	NA	0.0014	NA	25	25	Pass




NVNT	n20	2442	Ant1	2483.5-2496.5	2490.93	-58.46	NA	0.0014	NA	25	25	Pass
NVNT	n20	2442	Ant1	2496.5-13000	4888.85	-40.95	NA	0.0804	NA	2.5	2.5	Pass
NVNT	n20	2472	Ant1	30-1000	810.66	-58.24	NA	0.0015	NA	2.5	2.5	Pass
NVNT	n20	2472	Ant1	1000-2387	2301.88	-41.68	NA	0.0679	NA	2.5	2.5	Pass
NVNT	n20	2472	Ant1	2387-2400	2398.15	-57.23	NA	0.0019	NA	25	25	Pass
NVNT	n20	2472	Ant1	2483.5-2496.5	2483.50	-23.32	NA	4.6559	NA	25	25	Pass
NVNT	n20	2472	Ant1	2496.5-13000	4939.61	-42.54	NA	0.0557	NA	2.5	2.5	Pass
NVNT	n40	2422	Ant1	30-1000	816.02	-57.85	NA	0.0016	NA	2.5	2.5	Pass
NVNT	n40	2422	Ant1	1000-2387	2270.26	-41.70	NA	0.0676	NA	2.5	2.5	Pass
NVNT	n40	2422	Ant1	2387-2400	2400.00	-28.12	NA	1.5417	NA	25	25	Pass
NVNT	n40	2422	Ant1	2483.5-2496.5	2484.53	-58.64	NA	0.0014	NA	25	25	Pass
NVNT	n40	2422	Ant1	2496.5-13000	4842.98	-45.90	NA	0.0257	NA	2.5	2.5	Pass
NVNT	n40	2442	Ant1	30-1000	794.26	-58.17	NA	0.0015	NA	2.5	2.5	Pass
NVNT	n40	2442	Ant1	1000-2387	2222.73	-40.65	NA	0.0861	NA	2.5	2.5	Pass
NVNT	n40	2442	Ant1	2387-2400	2400.00	-50.48	NA	0.009	NA	25	25	Pass
NVNT	n40	2442	Ant1	2483.5-2496.5	2484.70	-53.48	NA	0.0045	NA	25	25	Pass
NVNT	n40	2442	Ant1	2496.5-13000	4883.25	-45.27	NA	0.0297	NA	2.5	2.5	Pass
NVNT	n40	2462	Ant1	30-1000	814.47	-58.10	NA	0.0015	NA	2.5	2.5	Pass
NVNT	n40	2462	Ant1	1000-2387	2241.04	-40.51	NA	0.0889	NA	2.5	2.5	Pass
NVNT	n40	2462	Ant1	2387-2400	2389.33	-58.80	NA	0.0013	NA	25	25	Pass
NVNT	n40	2462	Ant1	2483.5-2496.5	2483.50	-30.90	NA	0.8128	NA	25	25	Pass
NVNT	n40	2462	Ant1	2496.5-13000	3517.09	-41.20	NA	0.0759	NA	2.5	2.5	Pass
NVNT	ax20	2412	Ant1	30-1000	798.21	-57.70	NA	0.0017	NA	2.5	2.5	Pass
NVNT	ax20	2412	Ant1	1000-2387	2384.04	-46.57	NA	0.022	NA	2.5	2.5	Pass
NVNT	ax20	2412	Ant1	2387-2400	2400.00	-27.93	NA	1.6106	NA	25	25	Pass
NVNT	ax20	2412	Ant1	2483.5-2496.5	2484.02	-59.67	NA	0.0011	NA	25	25	Pass
NVNT	ax20	2412	Ant1	2496.5-13000	3404.70	-42.95	NA	0.0507	NA	2.5	2.5	Pass
NVNT	ax20	2442	Ant1	30-1000	255.82	-58.44	NA	0.0014	NA	2.5	2.5	Pass
NVNT	ax20	2442	Ant1	1000-2387	2180.06	-42.75	NA	0.0531	NA	2.5	2.5	Pass
NVNT	ax20	2442	Ant1	2387-2400	2400.00	-57.86	NA	0.0016	NA	25	25	Pass
NVNT	ax20	2442	Ant1	2483.5-2496.5	2484.85	-59.08	NA	0.0012	NA	25	25	Pass
NVNT	ax20	2442	Ant1	2496.5-13000	4884.65	-41.46	NA	0.0714	NA	2.5	2.5	Pass
NVNT	ax20	2472	Ant1	30-1000	949.04	-57.93	NA	0.0016	NA	2.5	2.5	Pass
NVNT	ax20	2472	Ant1	1000-2387	2323.80	-42.25	NA	0.0596	NA	2.5	2.5	Pass
NVNT	ax20	2472	Ant1	2387-2400	2399.32	-58.20	NA	0.0015	NA	25	25	Pass
NVNT	ax20	2472	Ant1	2483.5-2496.5	2483.50	-24.23	NA	3.7757	NA	25	25	Pass
NVNT	ax20	2472	Ant1	2496.5-13000	4943.47	-44.11	NA	0.0388	NA	2.5	2.5	Pass
NVNT	ax40	2422	Ant1	30-1000	712.10	-57.89	NA	0.0016	NA	2.5	2.5	Pass
NVNT	ax40	2422	Ant1	1000-2387	2386.82	-42.06	NA	0.0622	NA	2.5	2.5	Pass
NVNT	ax40	2422	Ant1	2387-2400	2400.00	-26.88	NA	2.0512	NA	25	25	Pass
NVNT	ax40	2422	Ant1	2483.5-2496.5	2484.05	-58.29	NA	0.0015	NA	25	25	Pass
NVNT	ax40	2422	Ant1	2496.5-13000	4840.18	-47.44	NA	0.018	NA	2.5	2.5	Pass
NVNT	ax40	2442	Ant1	30-1000	949.24	-57.67	NA	0.0017	NA	2.5	2.5	Pass
NVNT	ax40	2442	Ant1	1000-2387	2227.08	-40.78	NA	0.0836	NA	2.5	2.5	Pass


NVNT	ax40	2442	Ant1	2387-2400	2397.80	-53.13	NA	0.0049	NA	25	25	Pass
NVNT	ax40	2442	Ant1	2483.5-2496.5	2489.63	-49.02	NA	0.0125	NA	25	25	Pass
NVNT	ax40	2442	Ant1	2496.5-13000	4884.65	-46.49	NA	0.0224	NA	2.5	2.5	Pass
NVNT	ax40	2462	Ant1	30-1000	794.72	-58.00	NA	0.0016	NA	2.5	2.5	Pass
NVNT	ax40	2462	Ant1	1000-2387	2238.41	-40.70	NA	0.0851	NA	2.5	2.5	Pass
NVNT	ax40	2462	Ant1	2387-2400	2398.21	-59.74	NA	0.0011	NA	25	25	Pass
NVNT	ax40	2462	Ant1	2483.5-2496.5	2483.50	-30.72	NA	0.8472	NA	25	25	Pass
NVNT	ax40	2462	Ant1	2496.5-13000	2498.25	-44.35	NA	0.0367	NA	2.5	2.5	Pass


Test Graphs



Tx. Spurious NVNT b 2412MHz Ant1 @ 30MHz-1000MHz

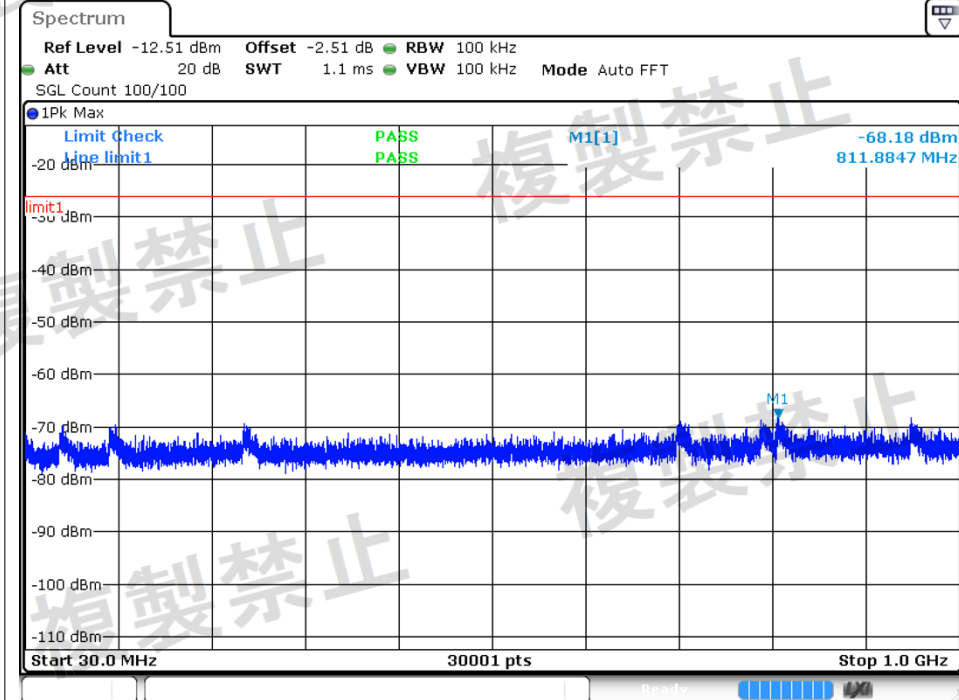




Tx. Spurious NVNT b 2412MHz Ant1 @ 1000MHz-2387MHz

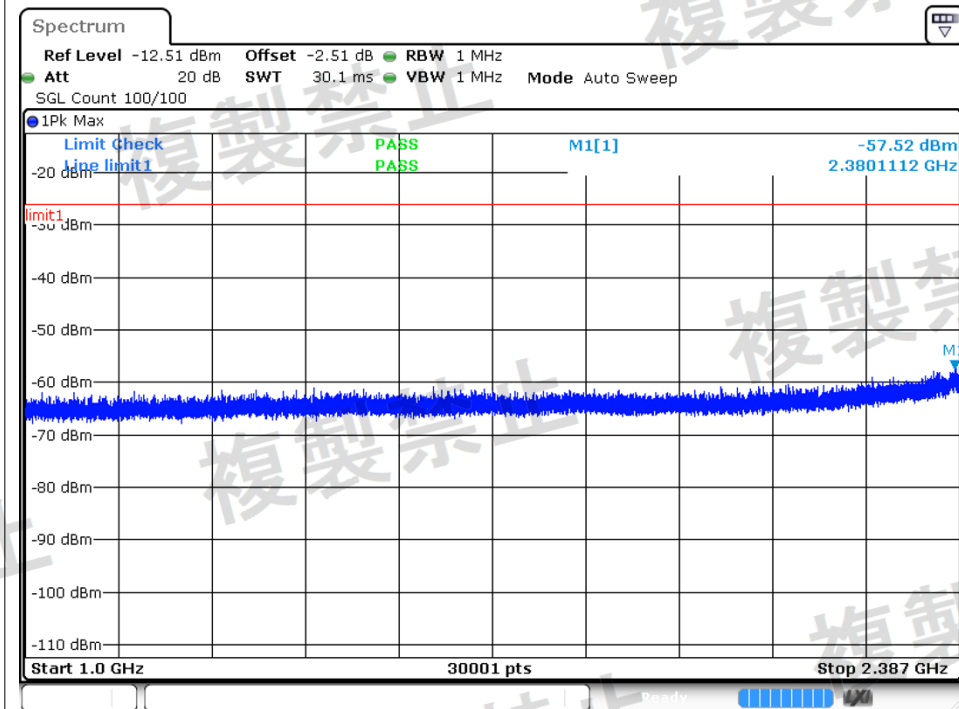


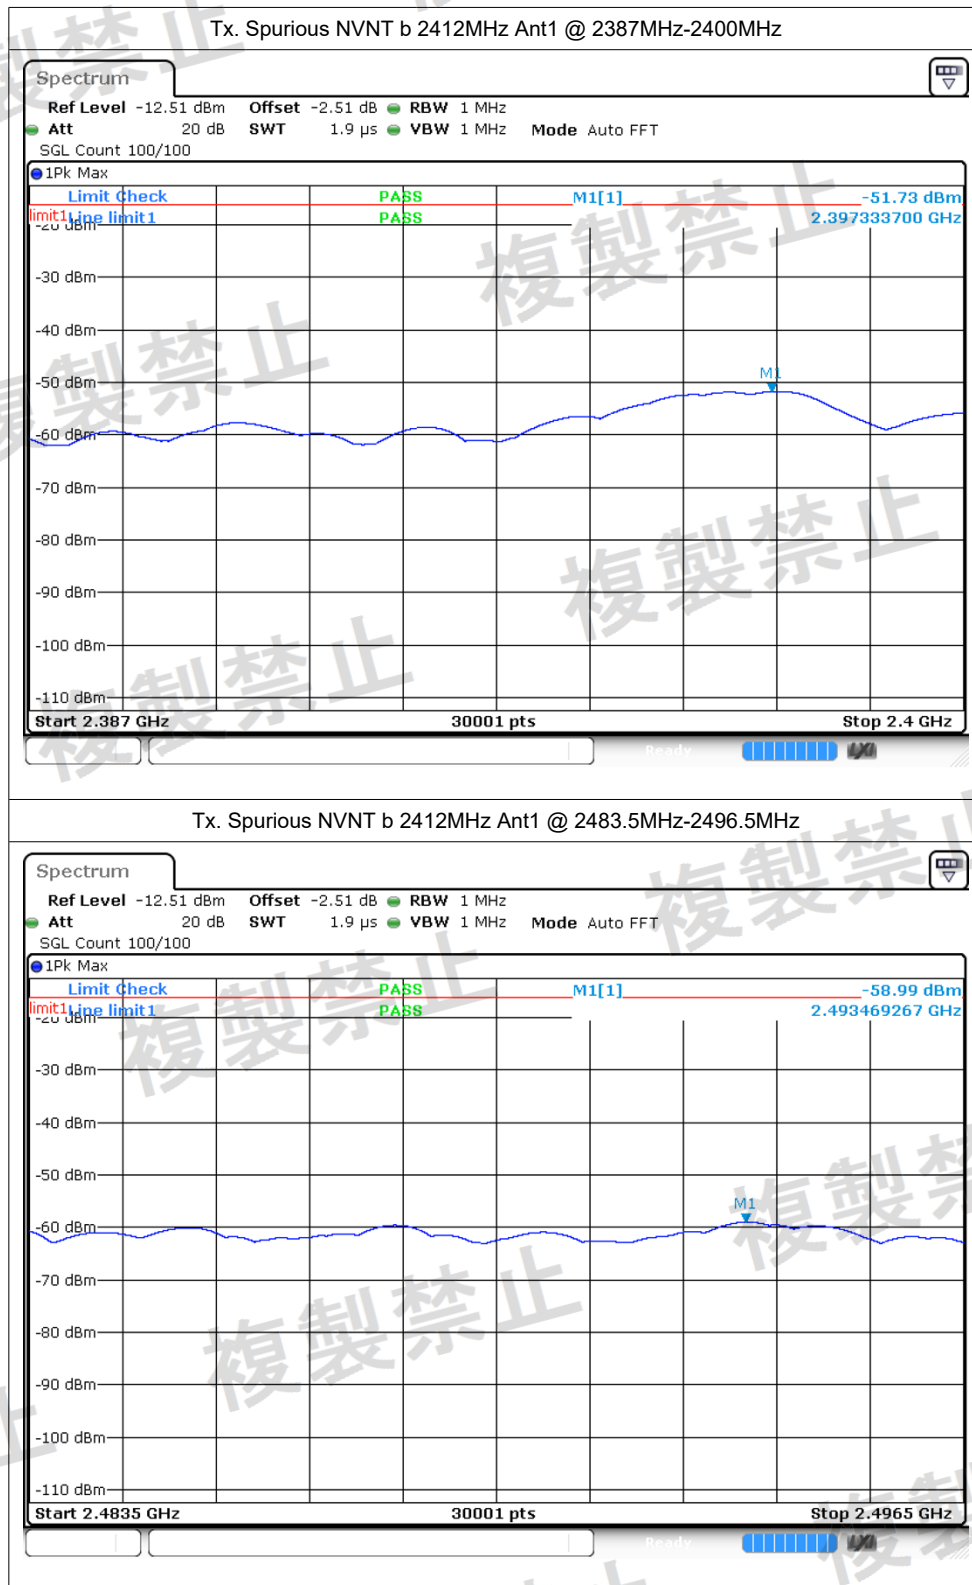


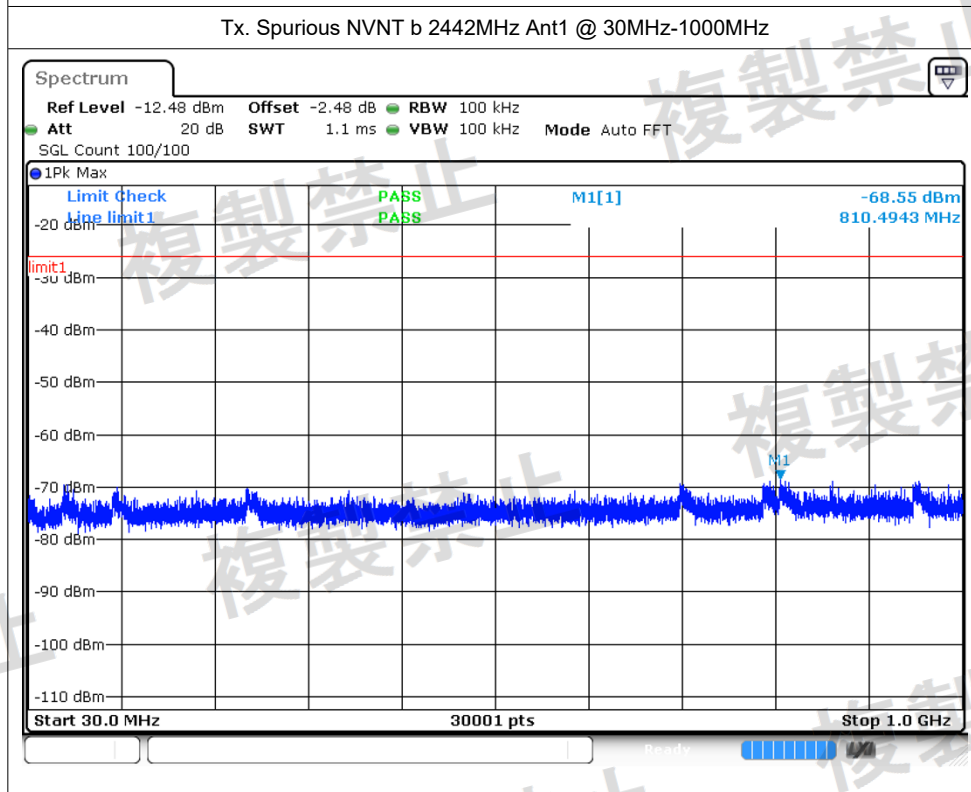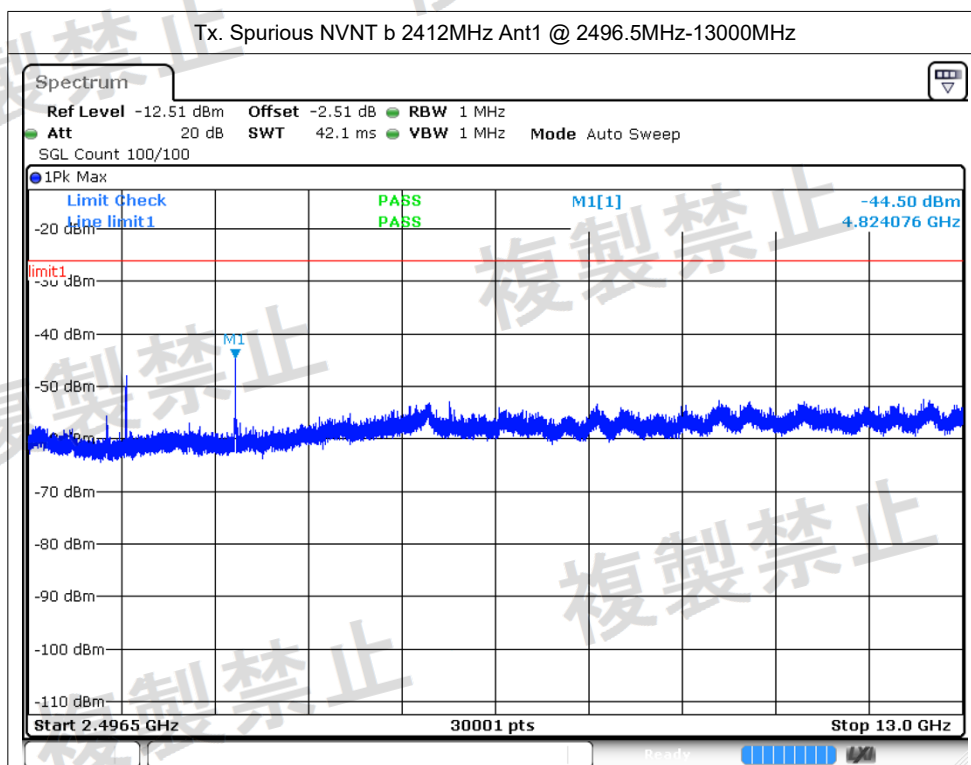


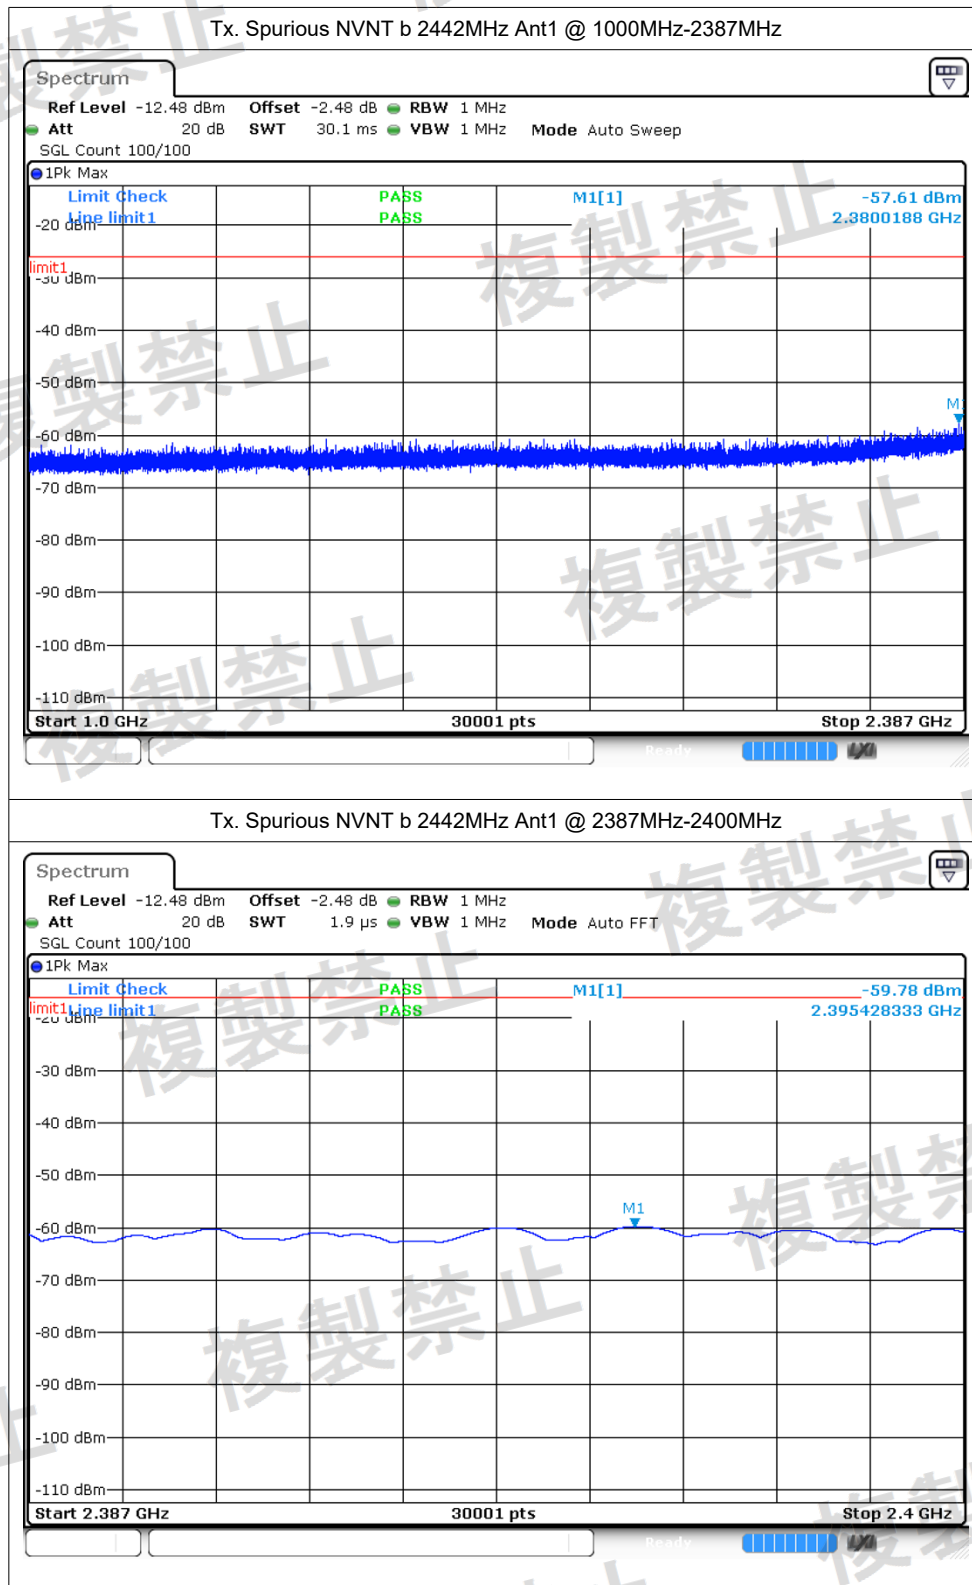


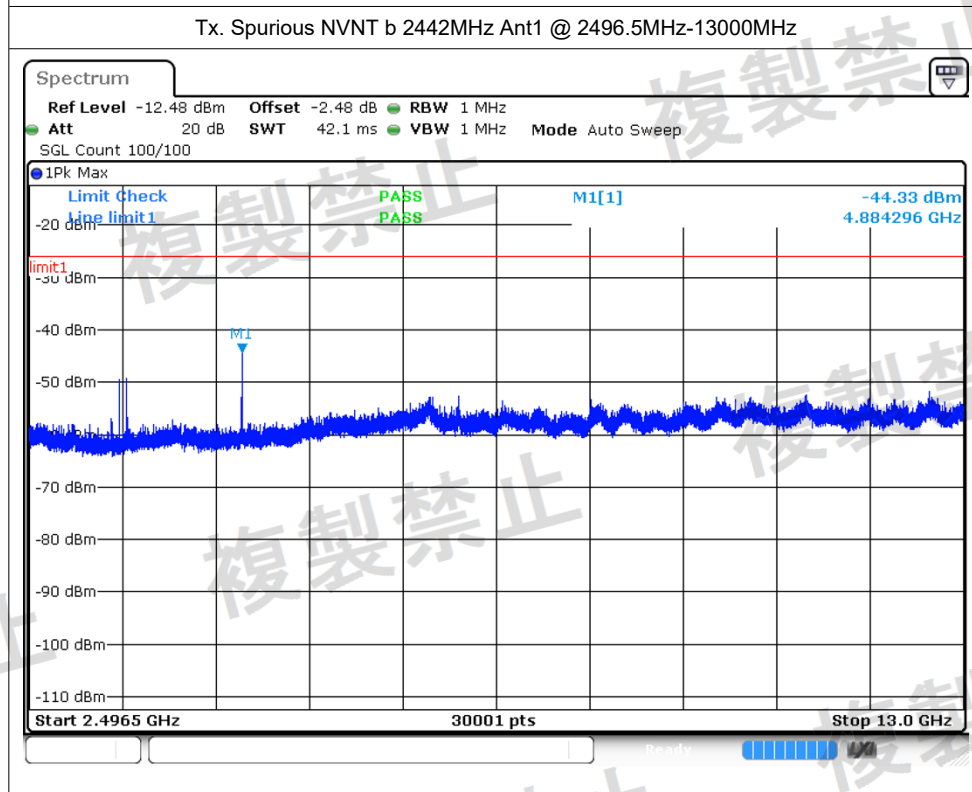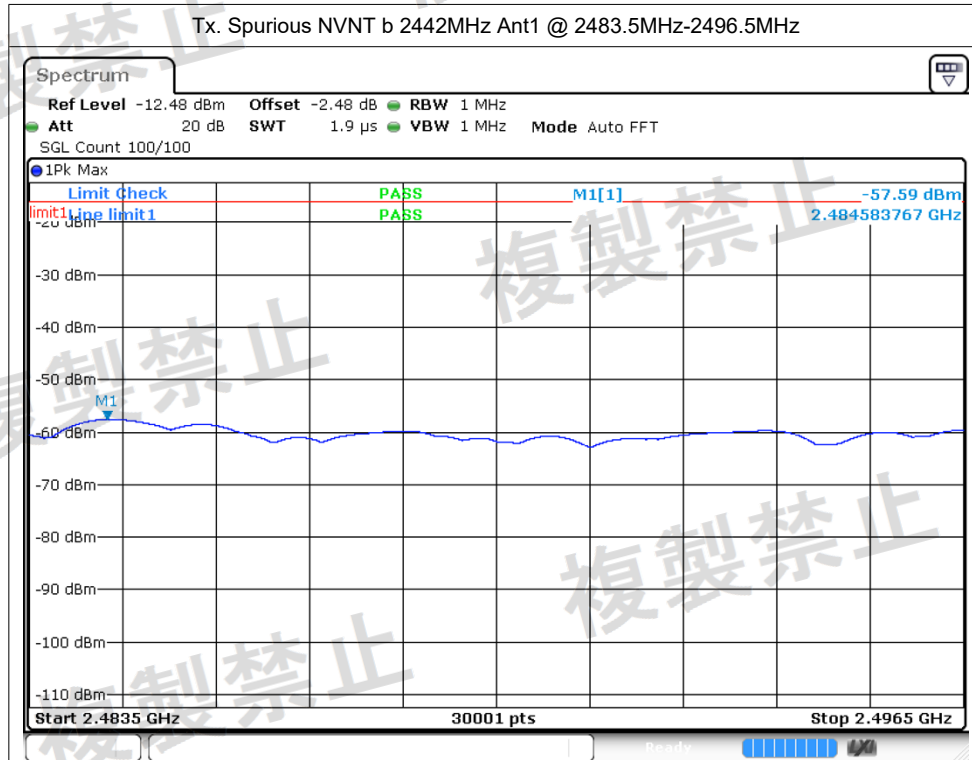


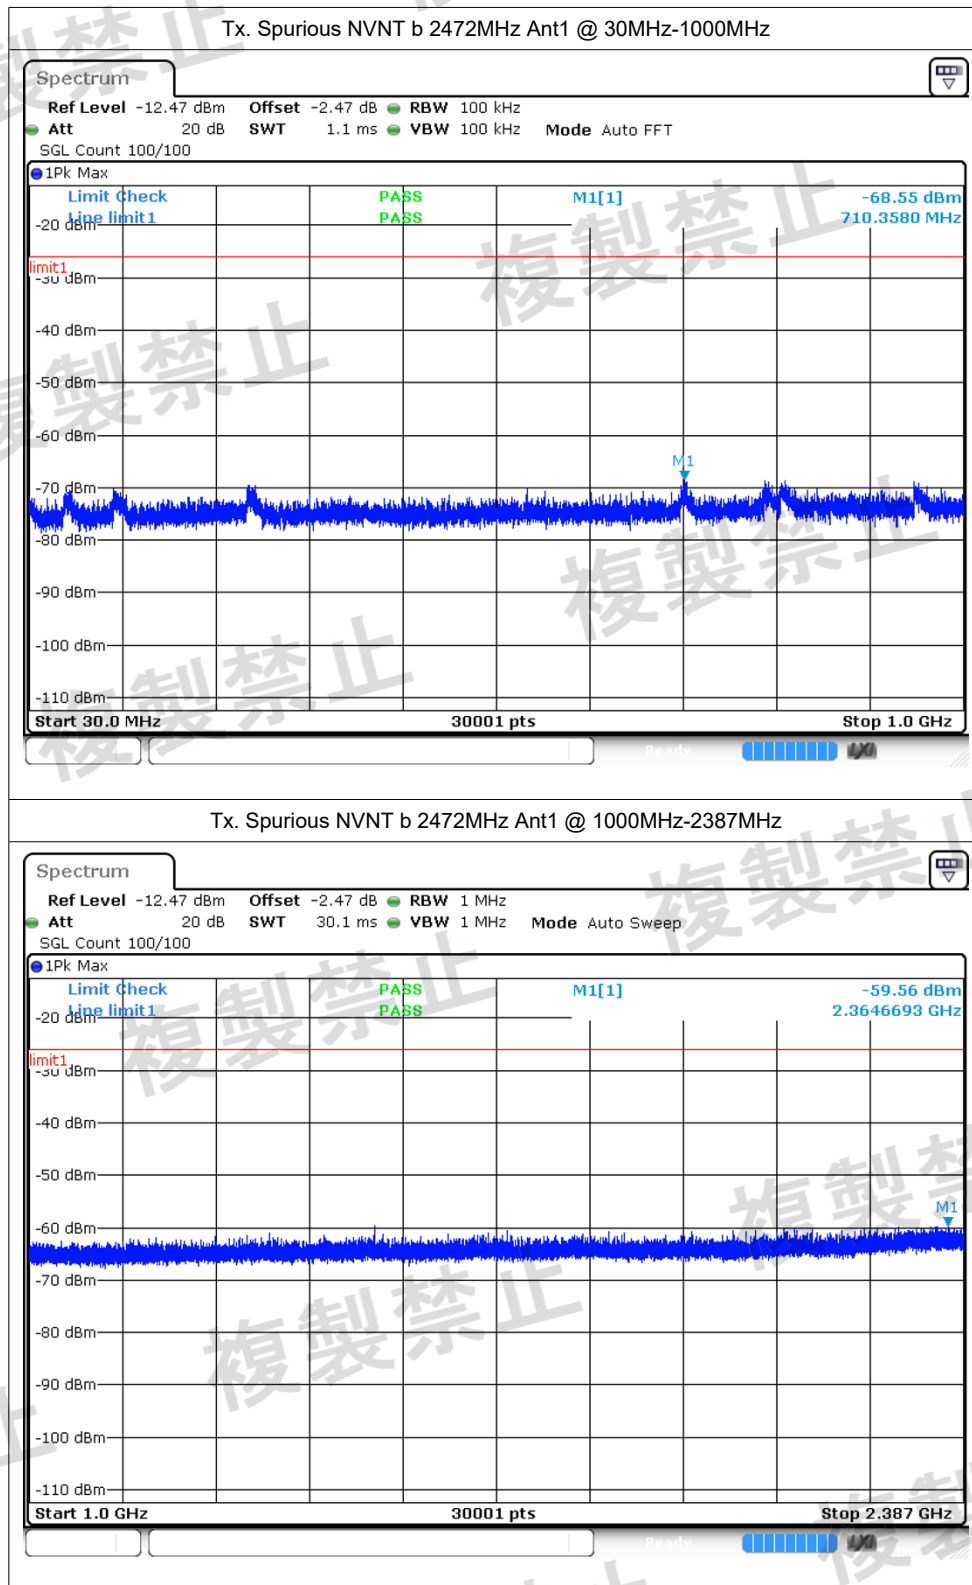


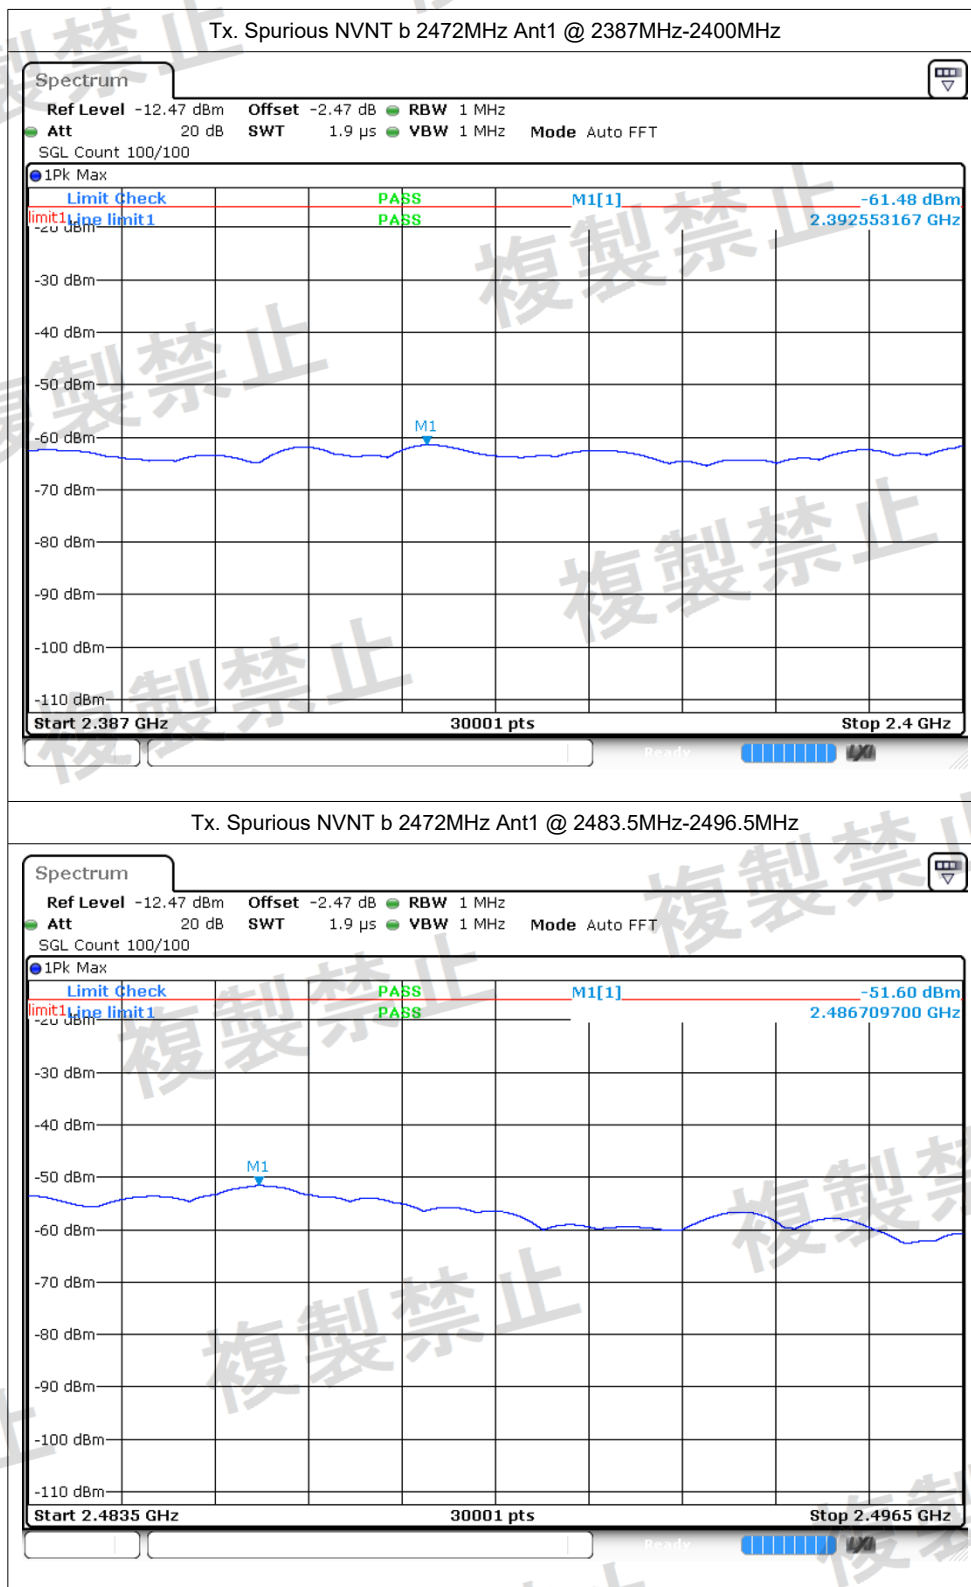


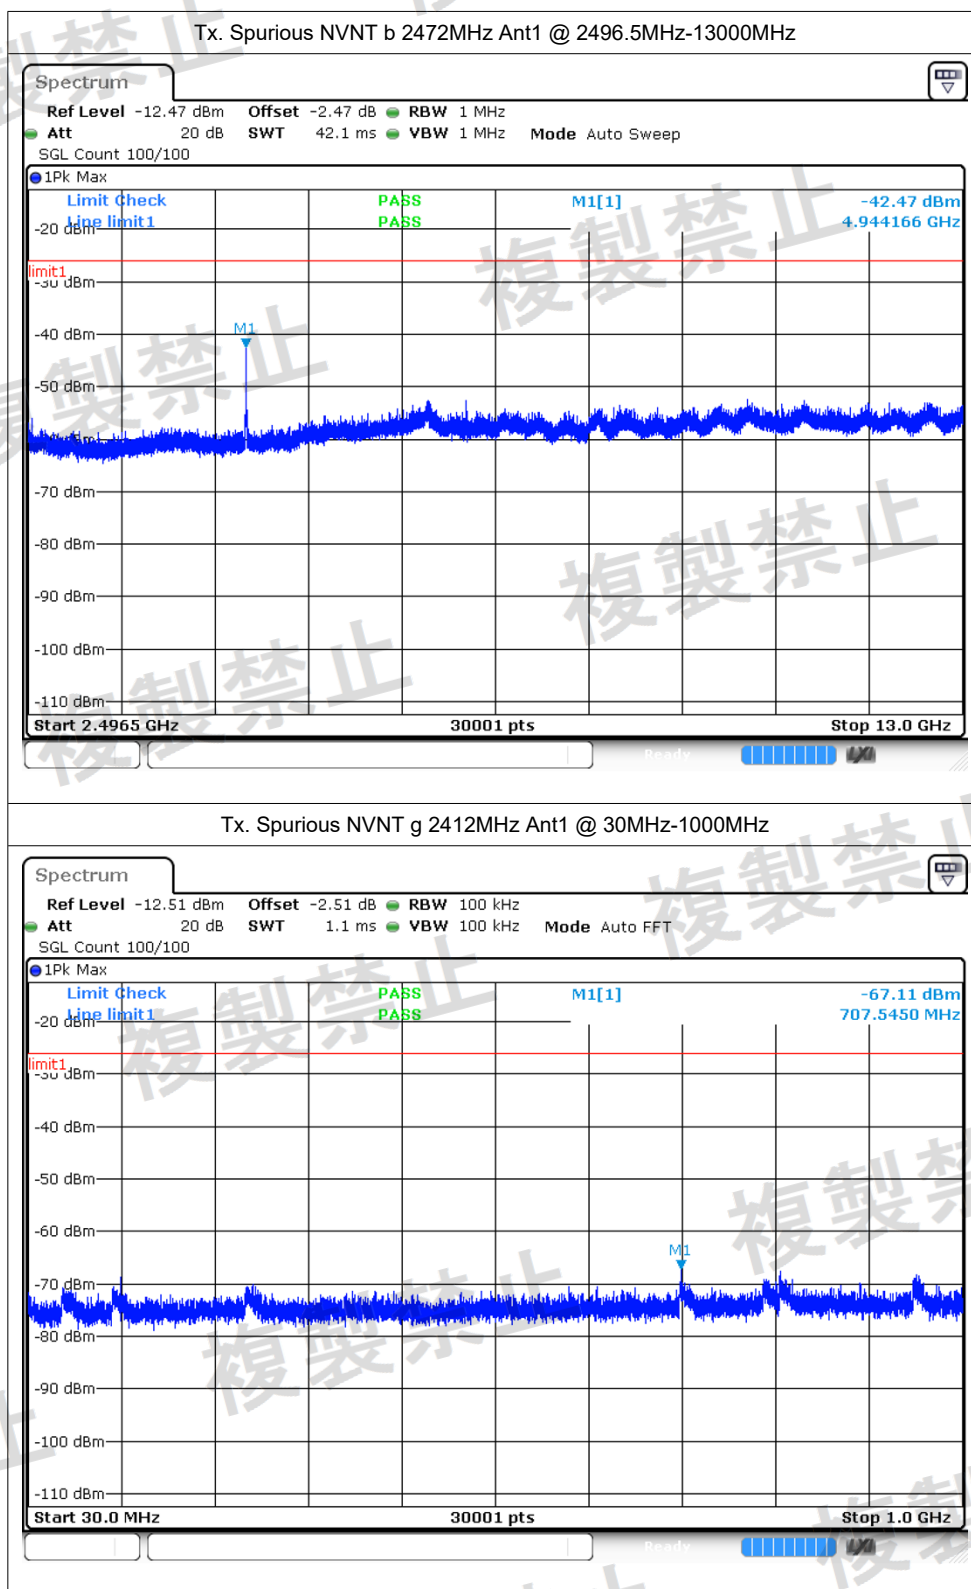


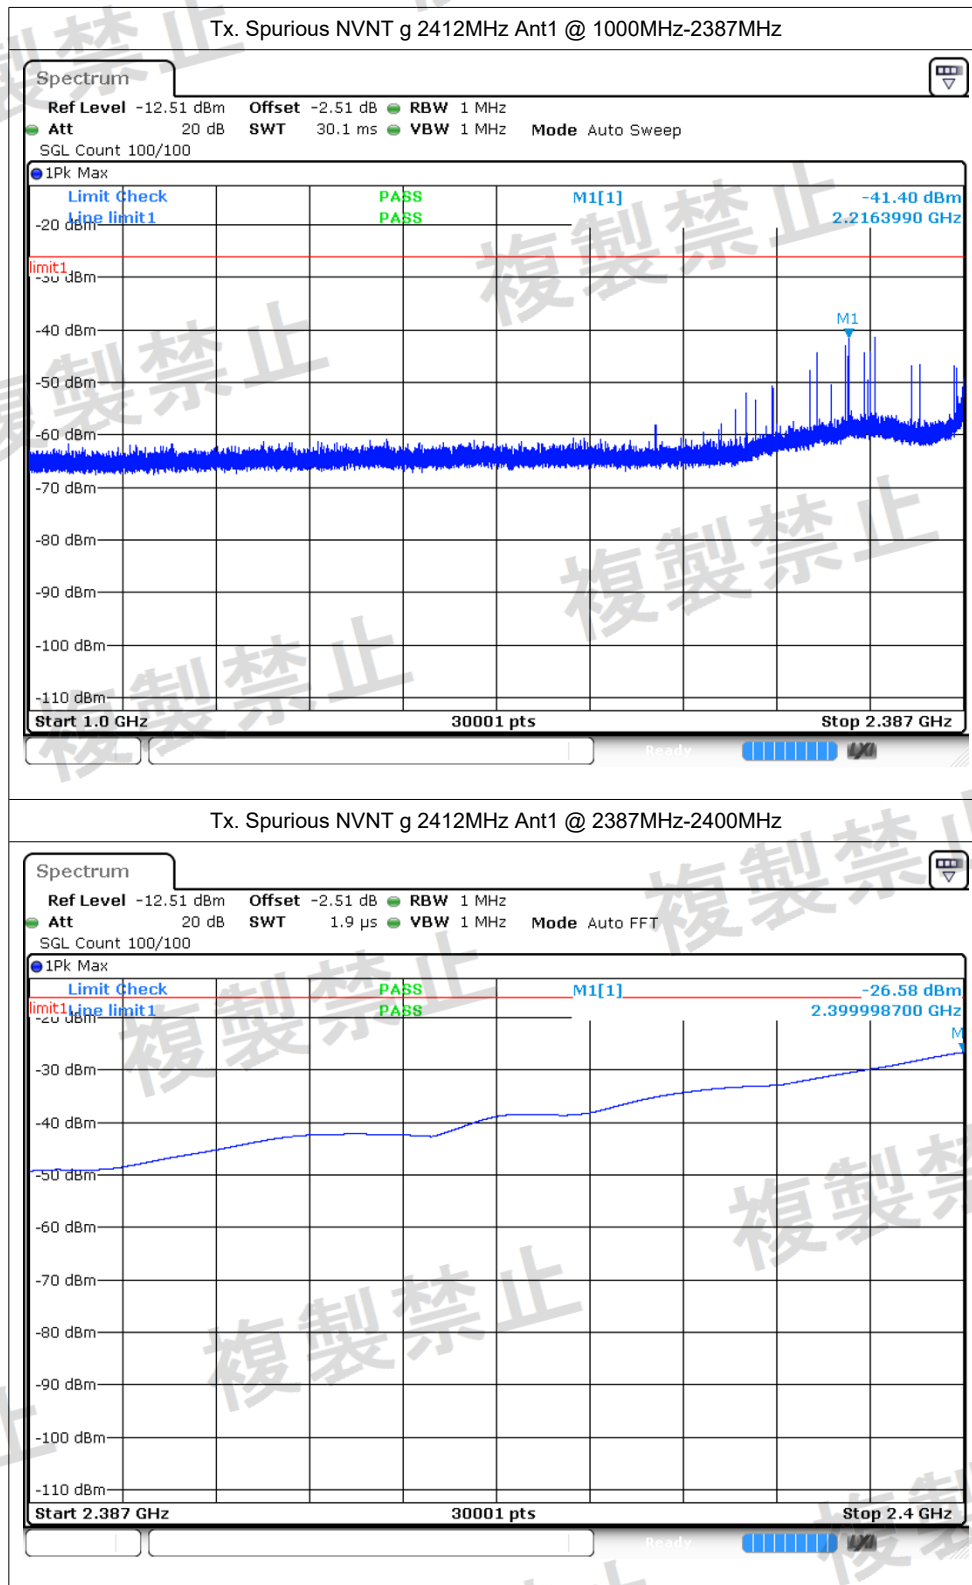


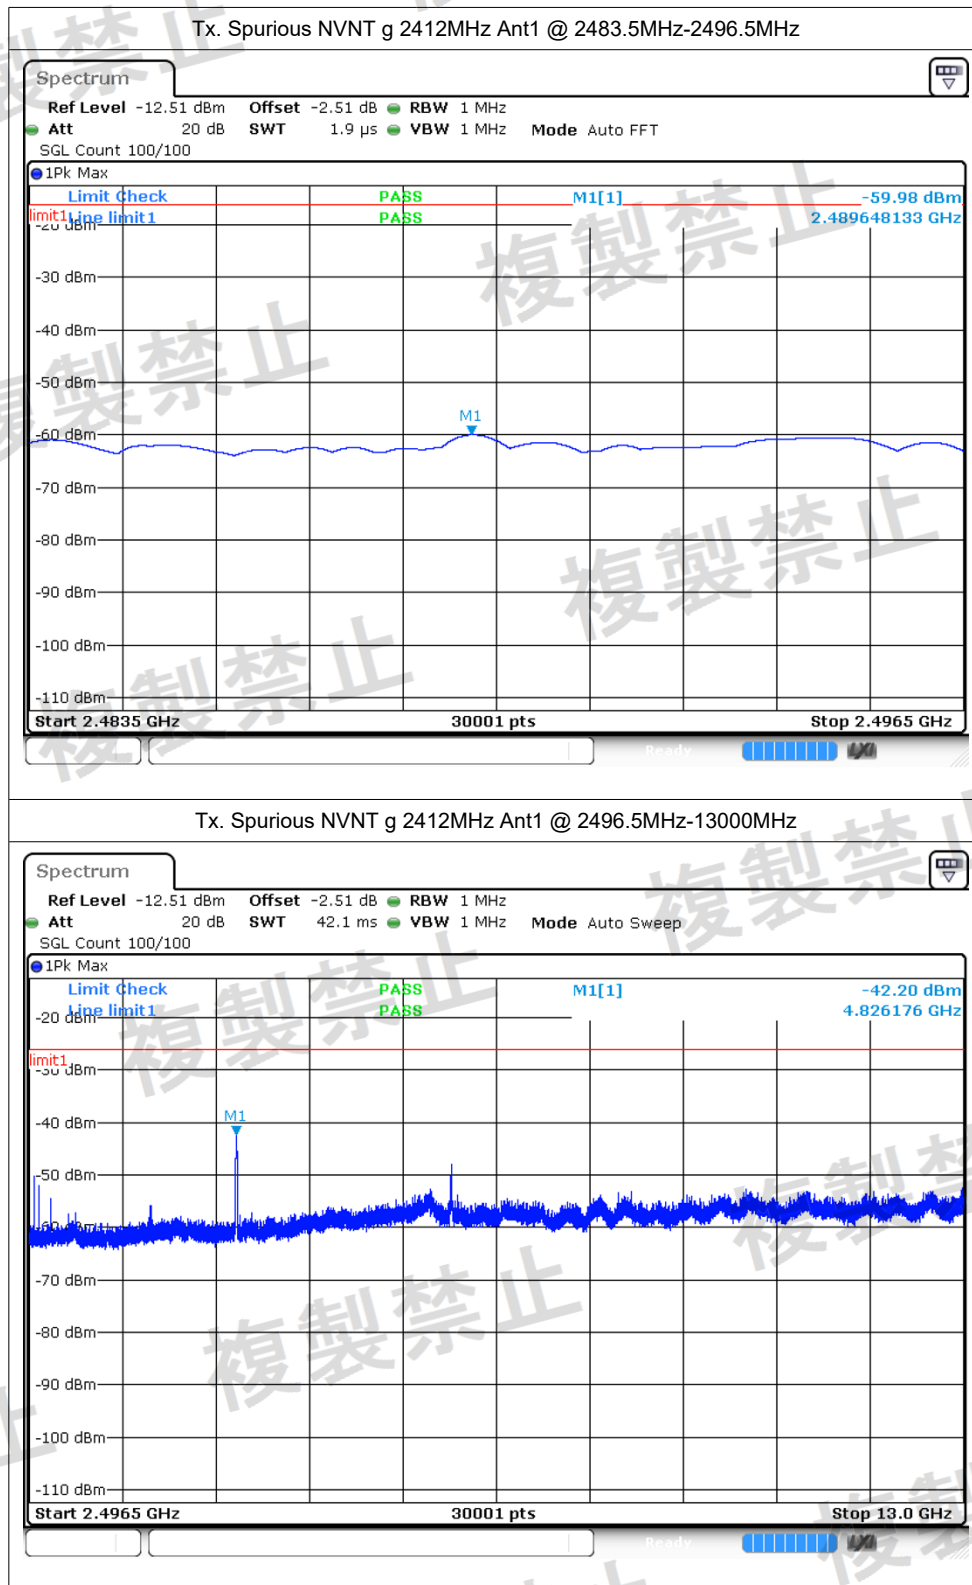


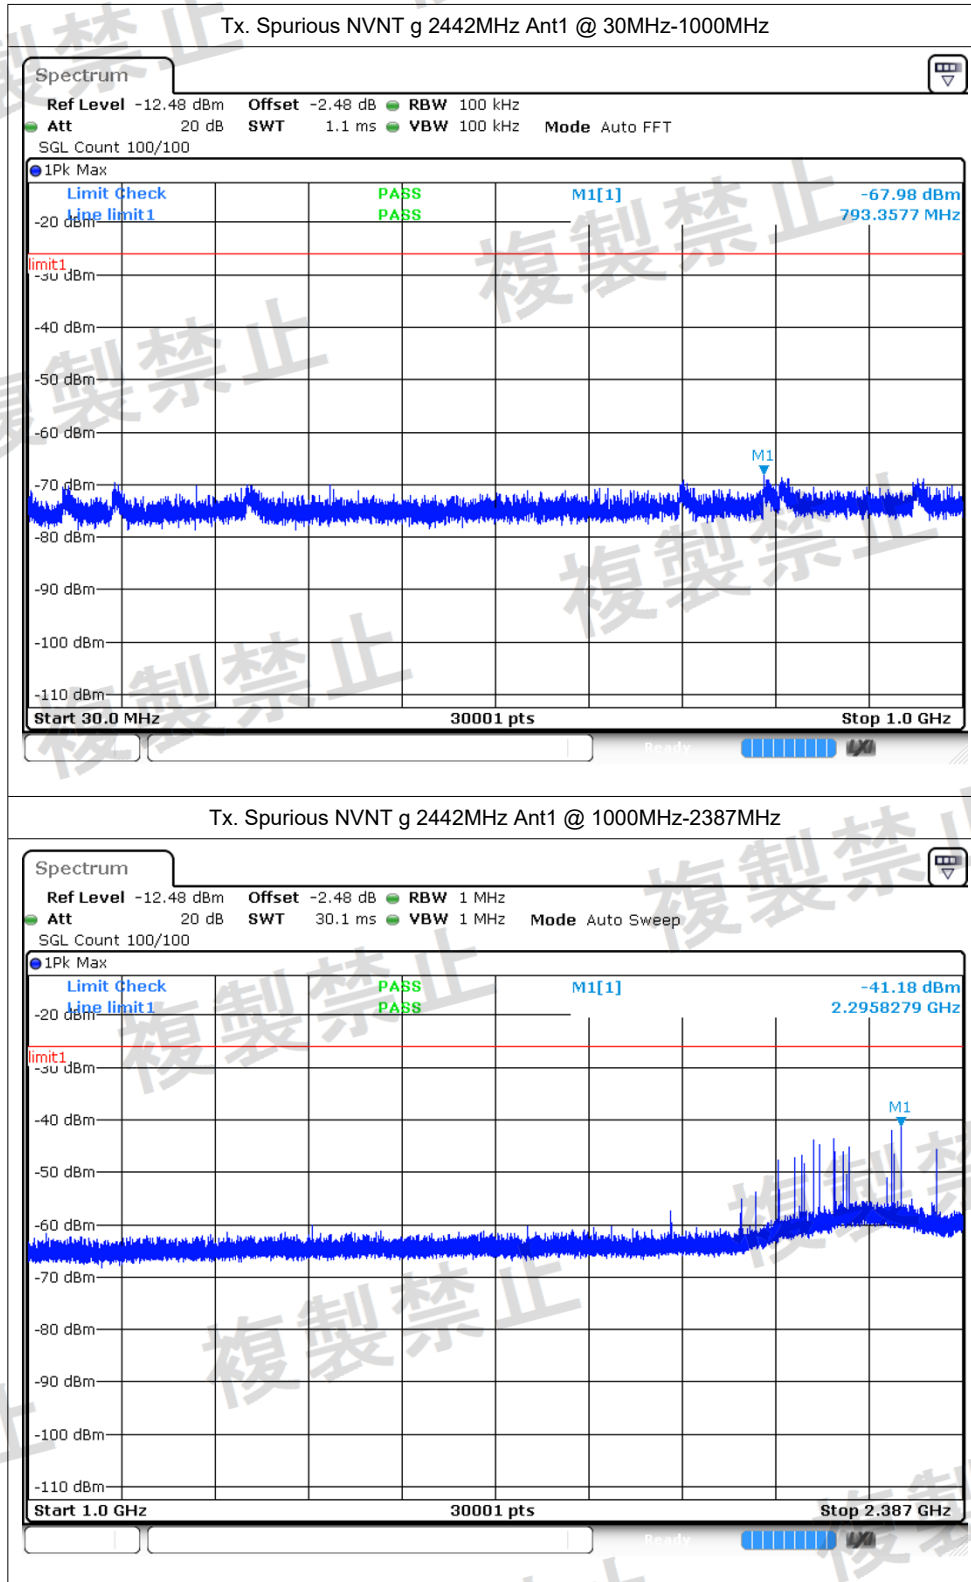


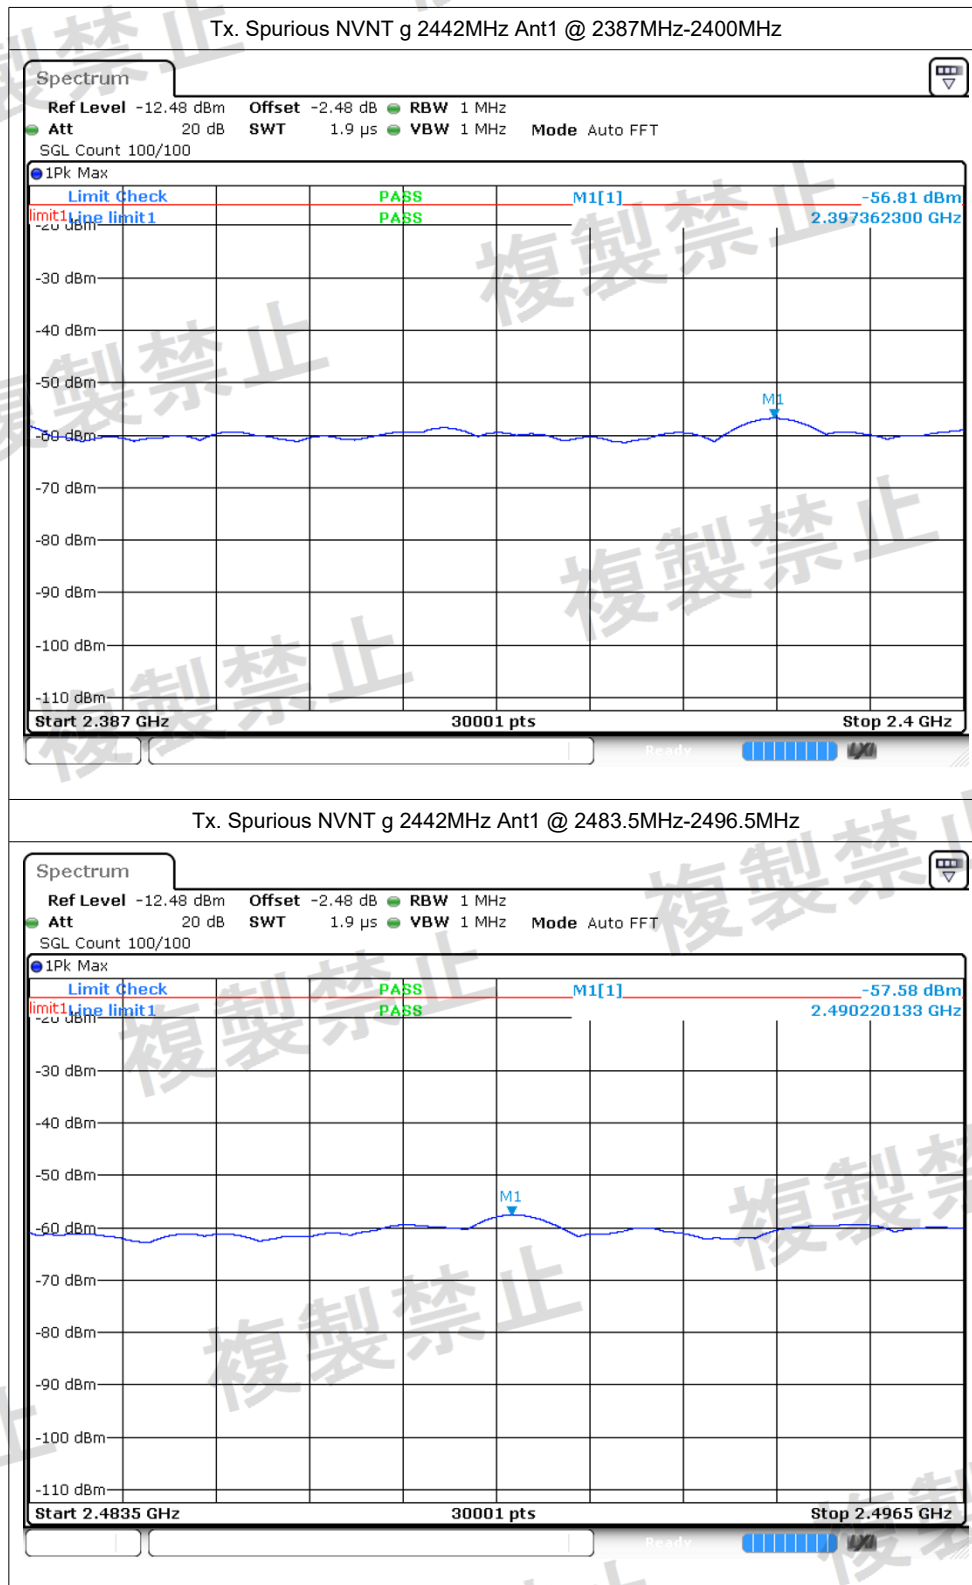


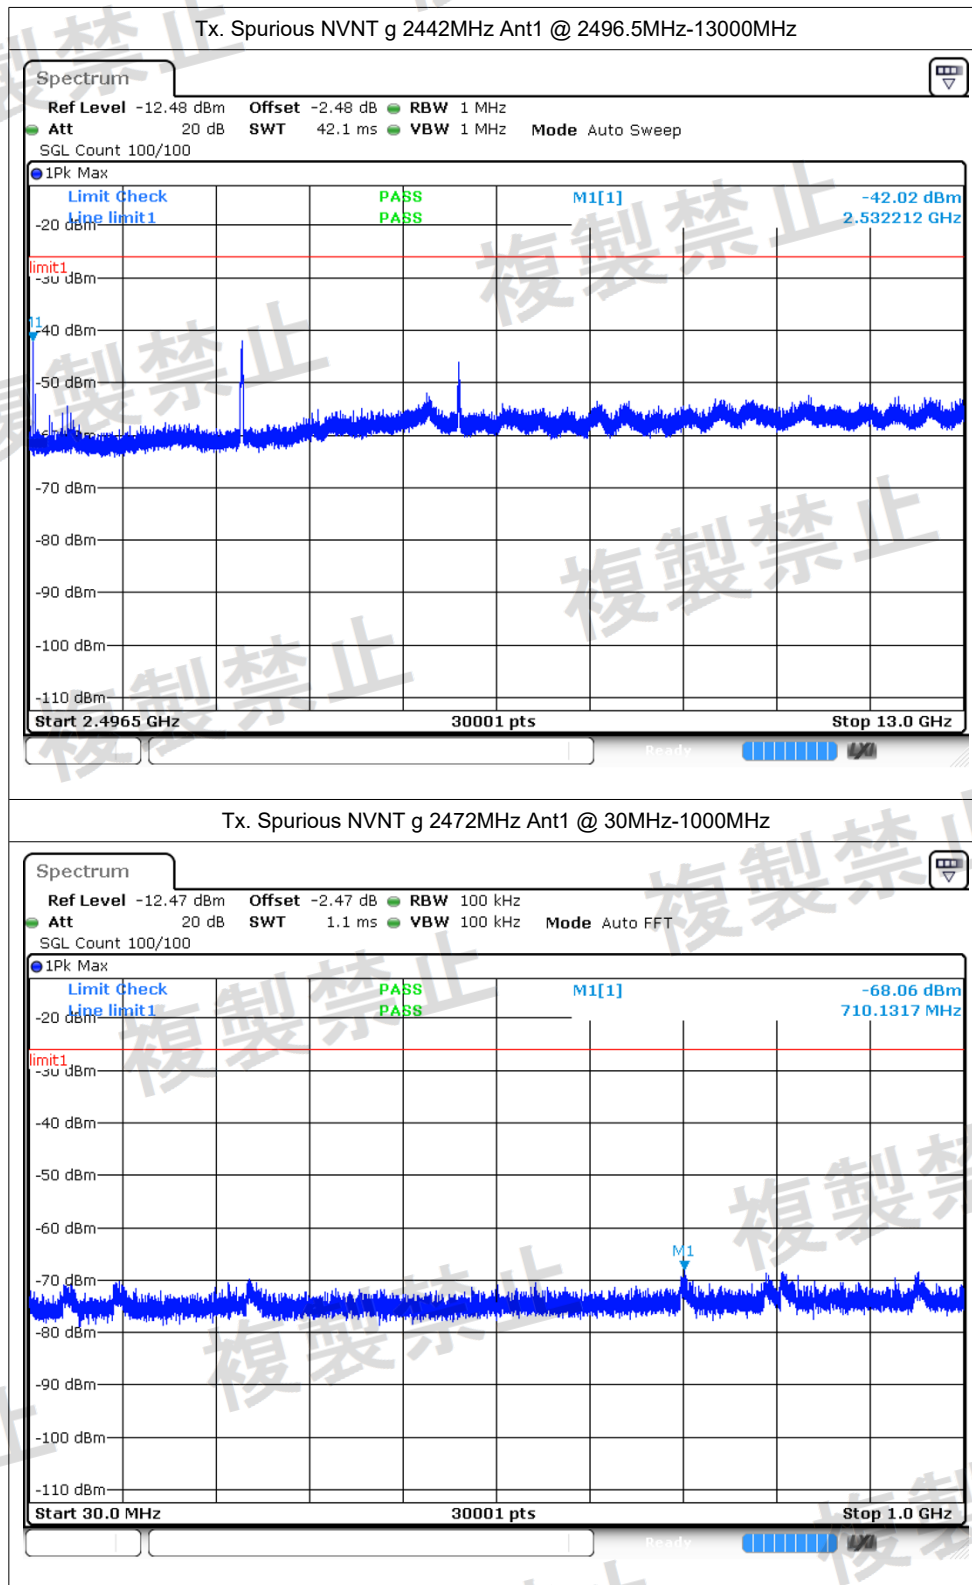


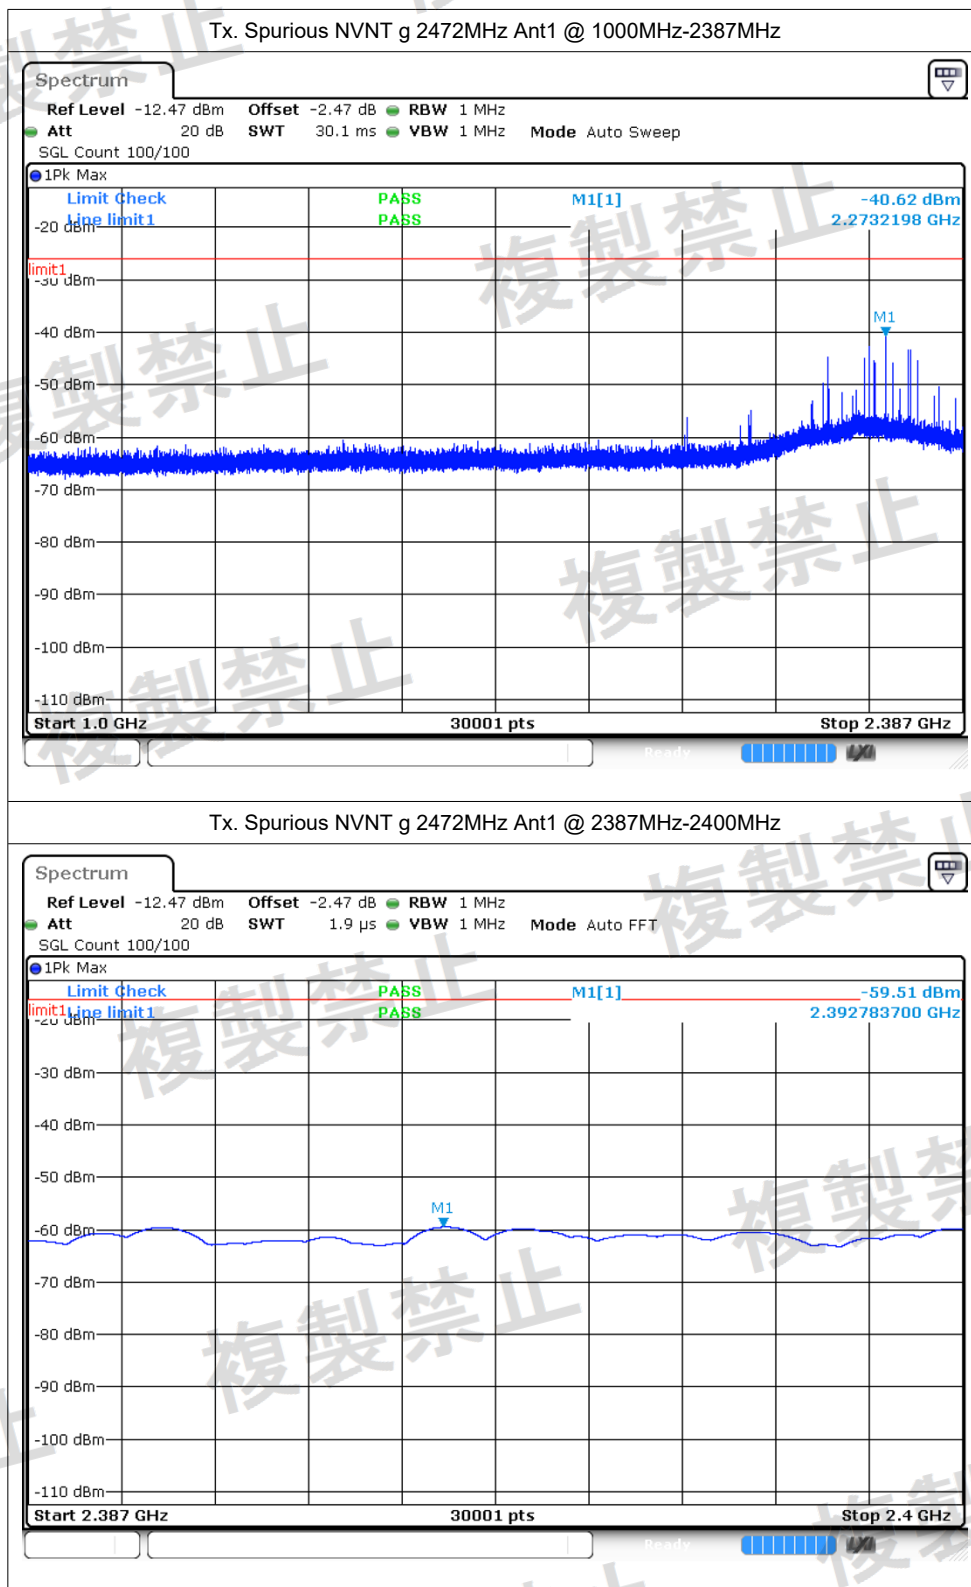


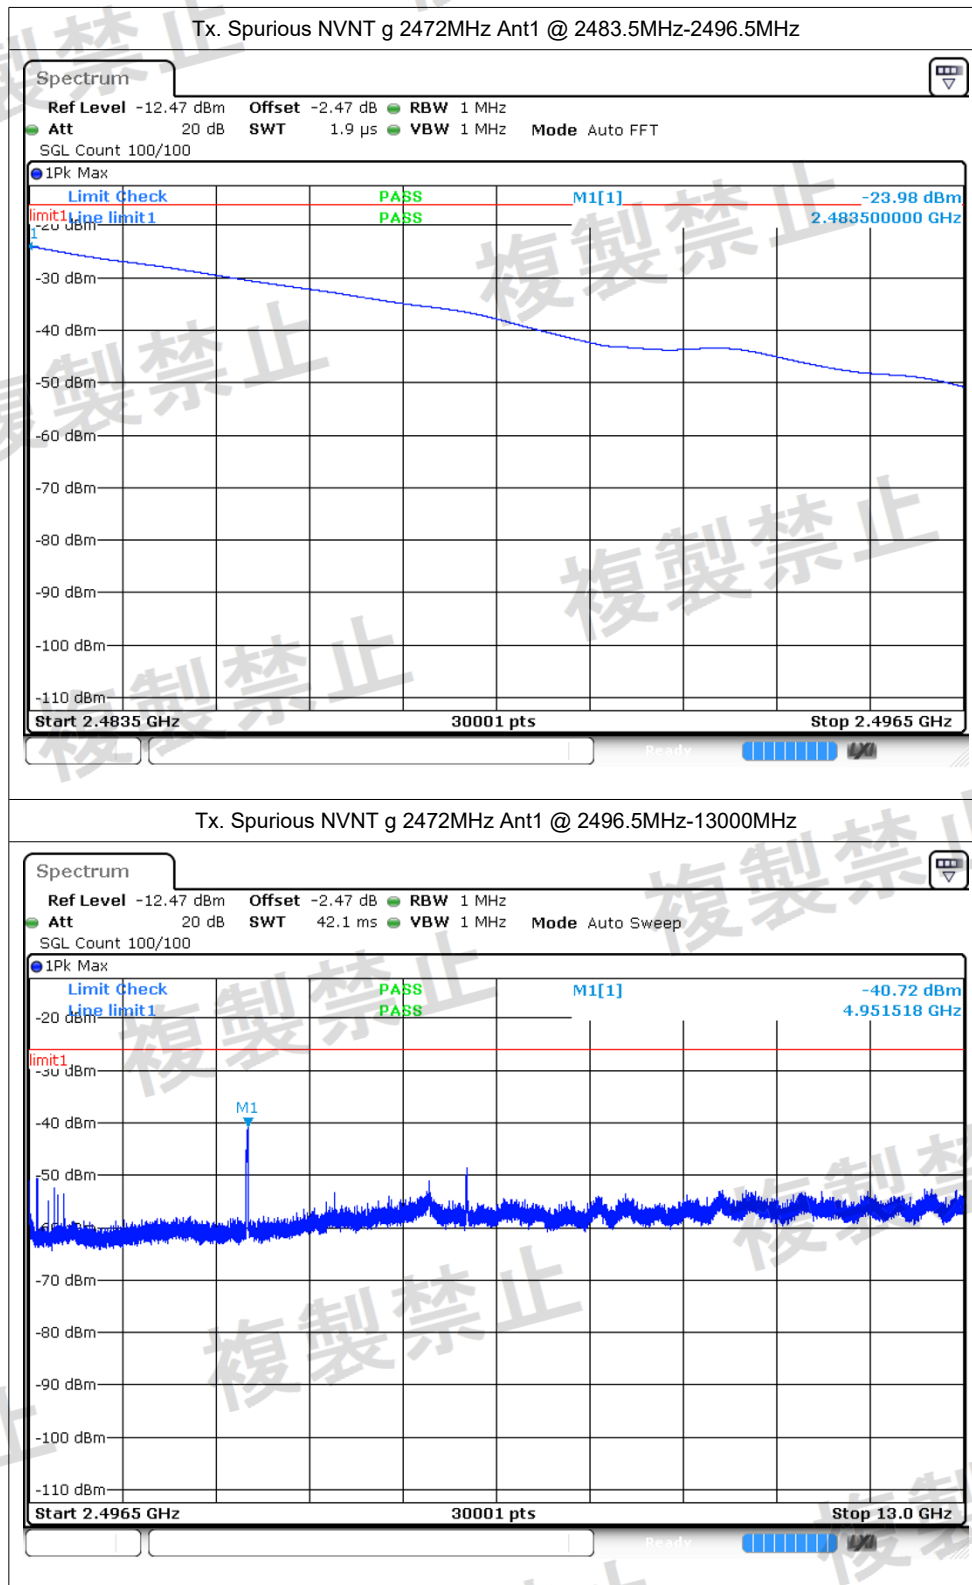


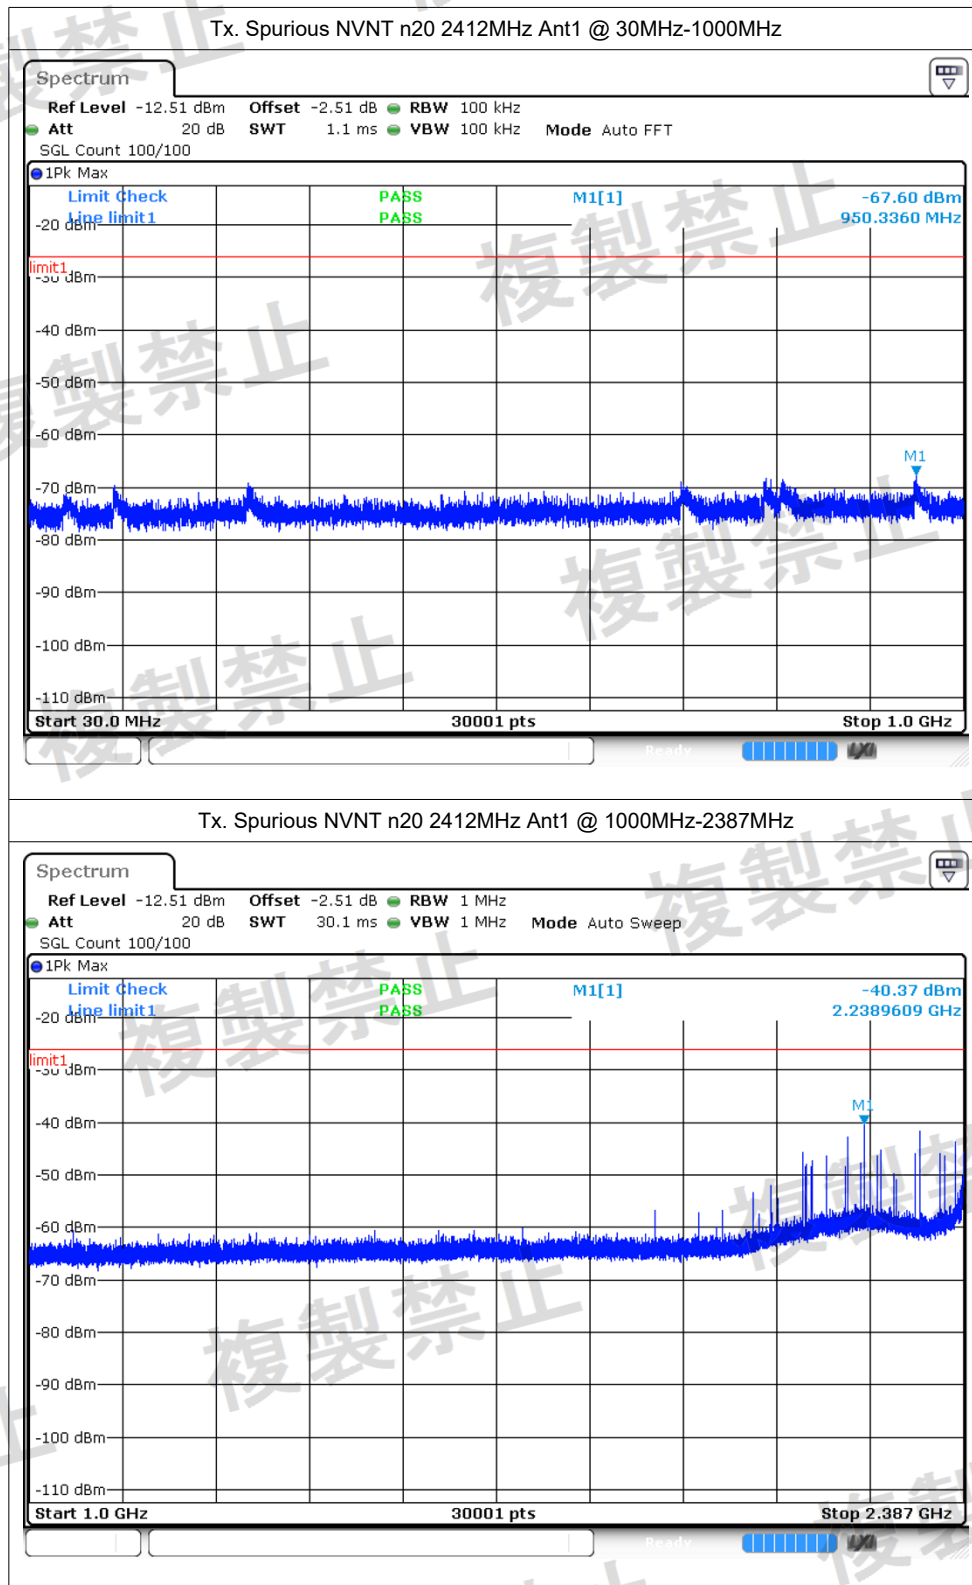



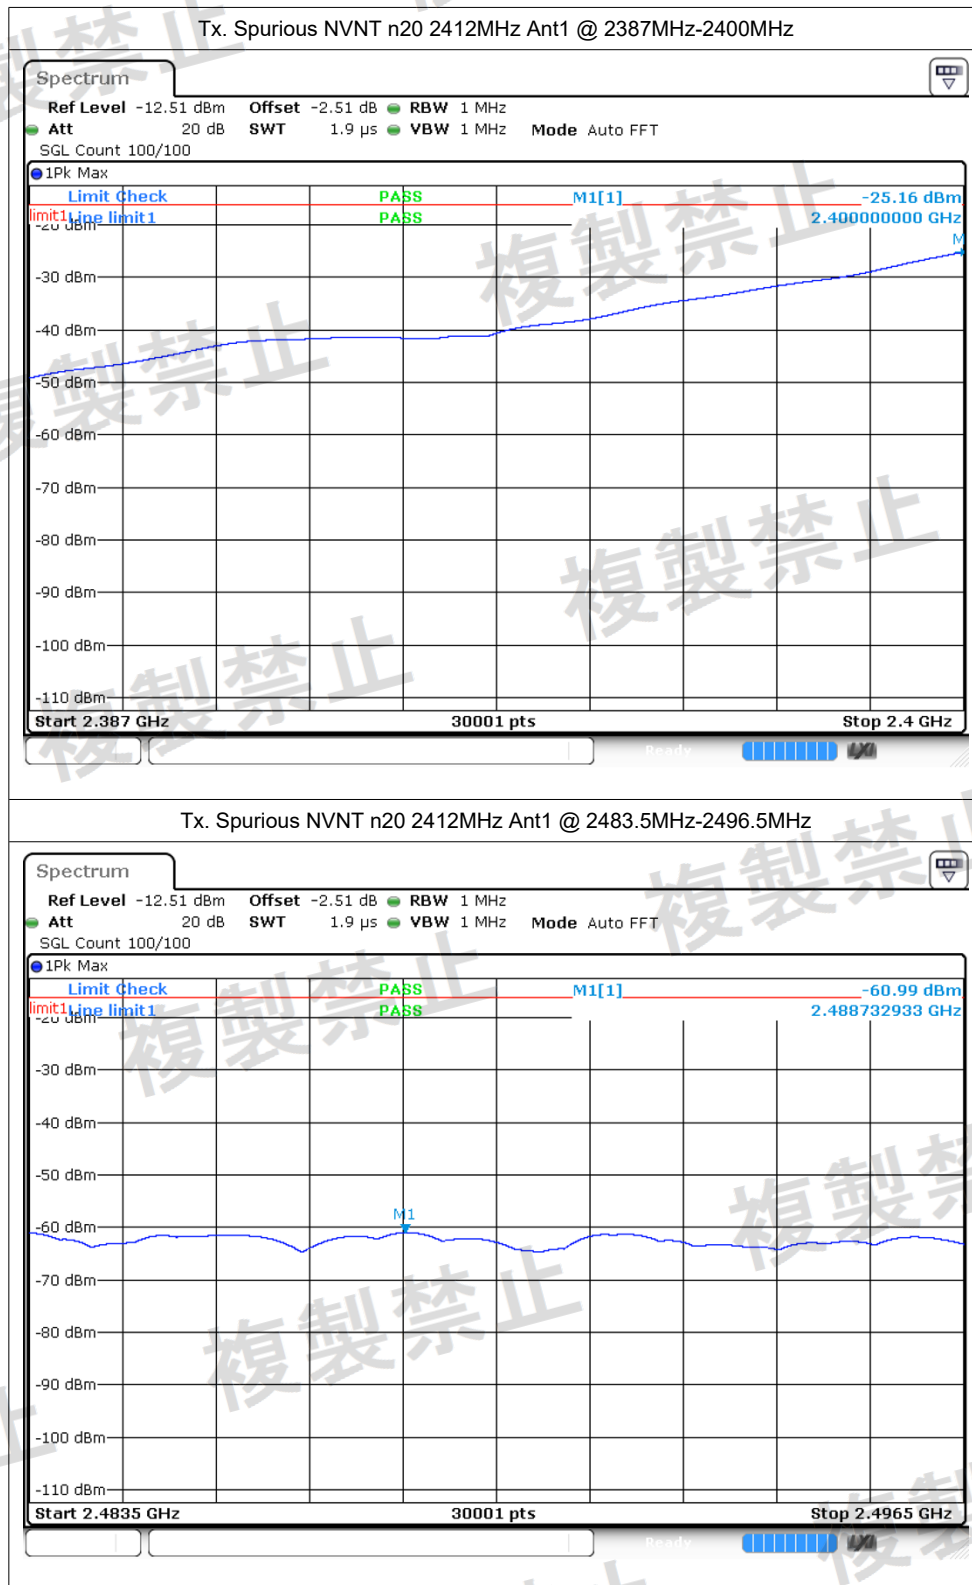


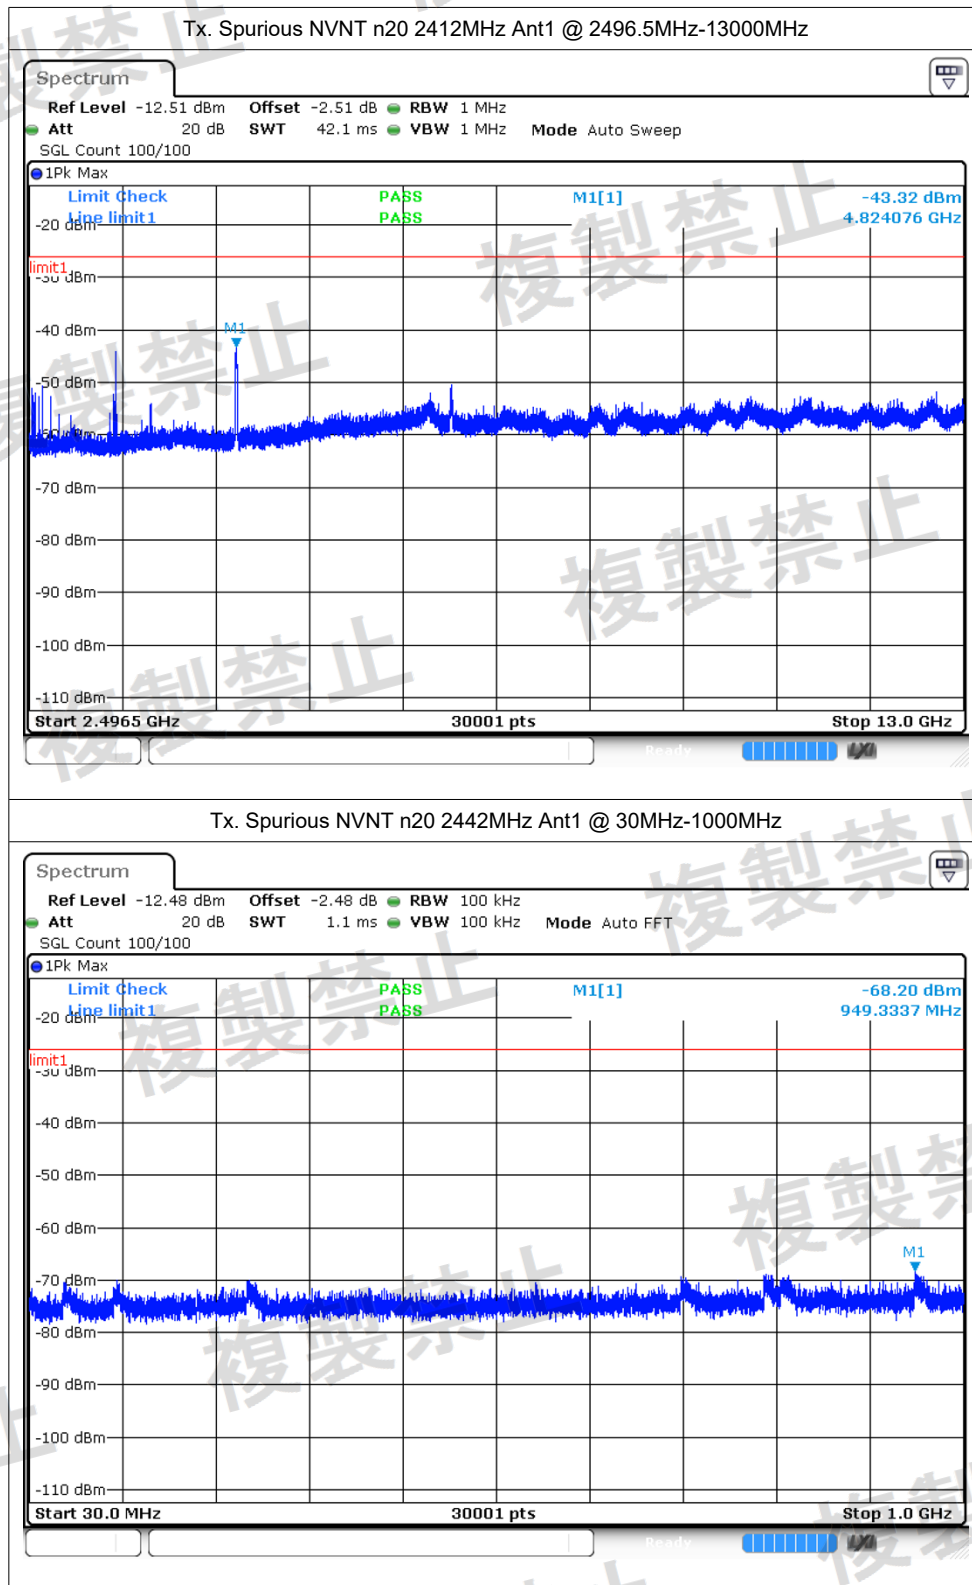


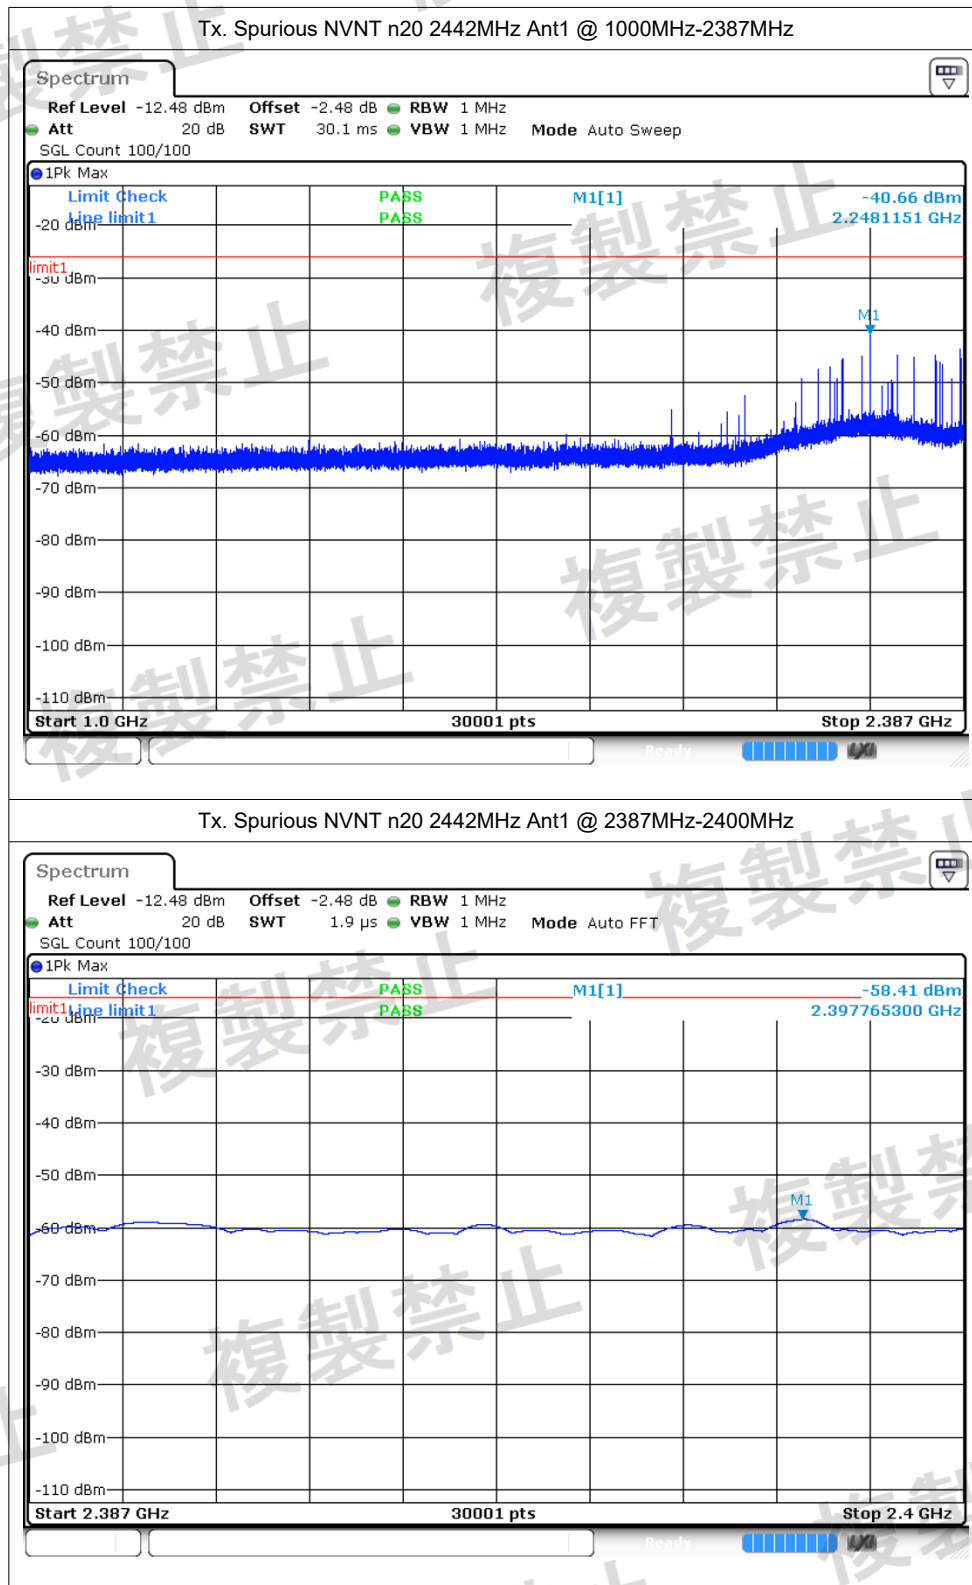


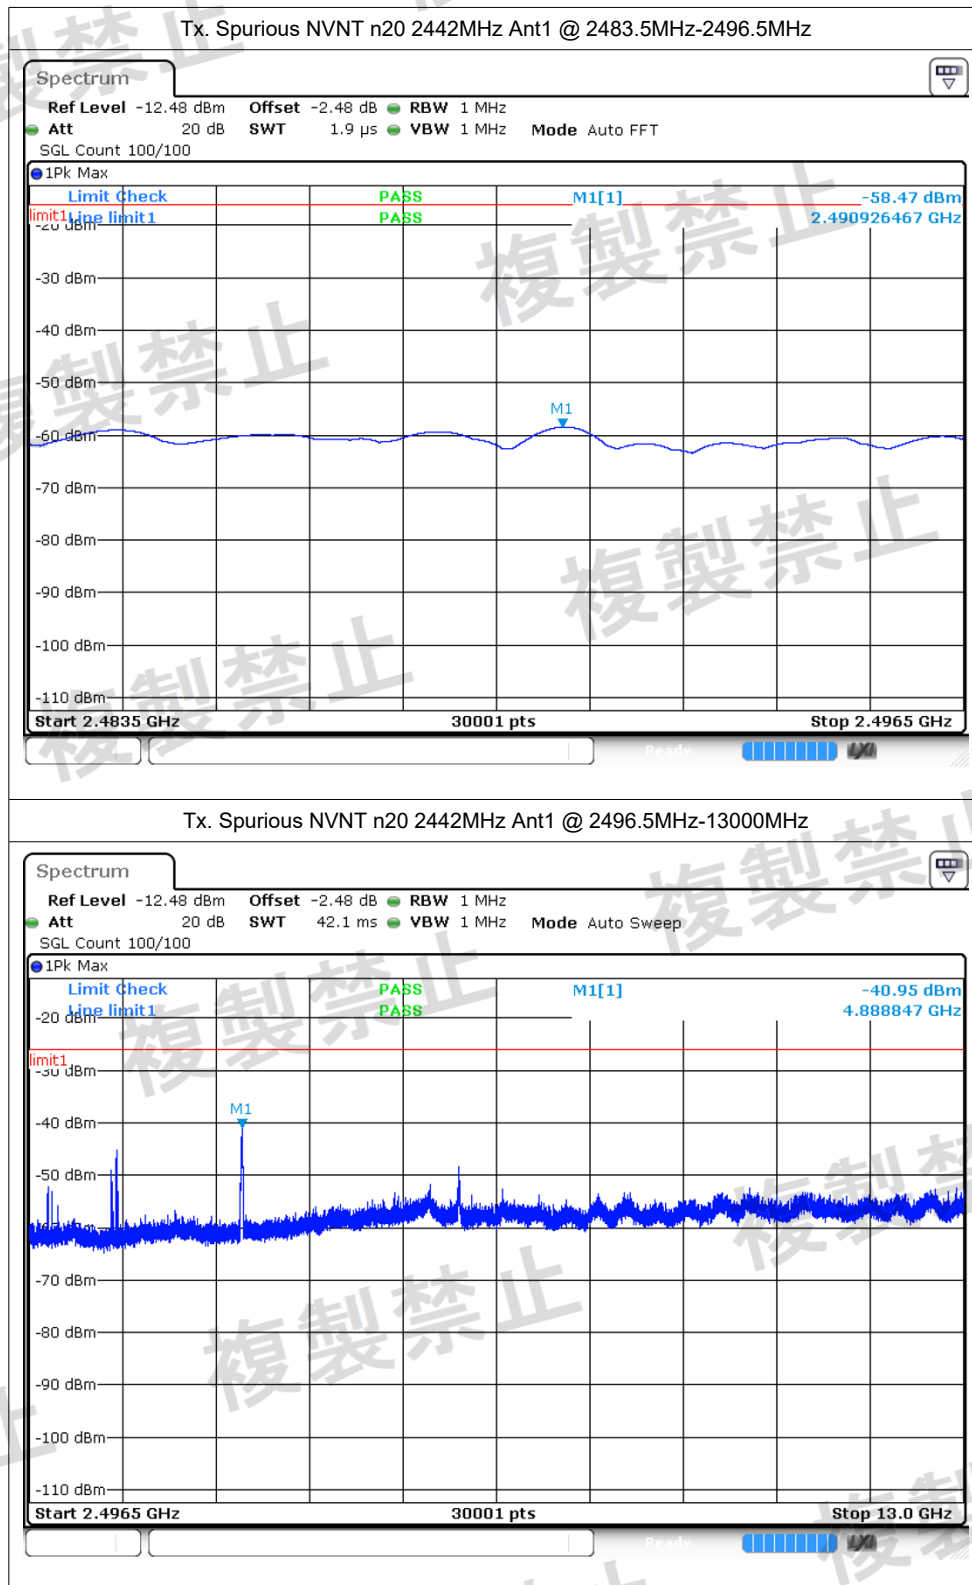


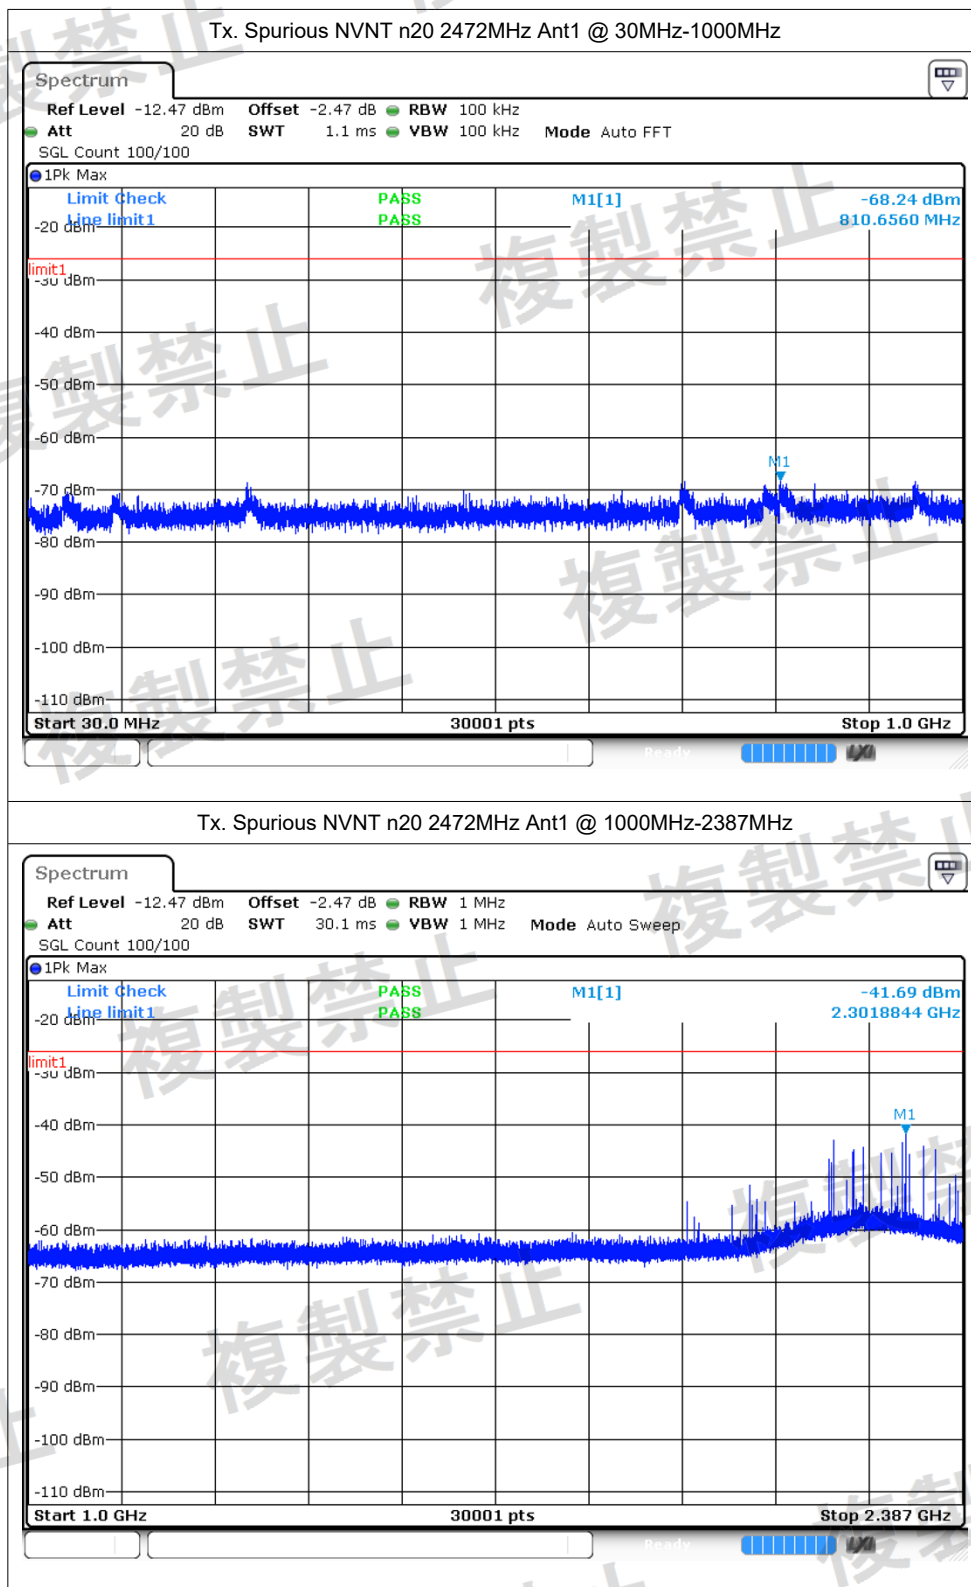


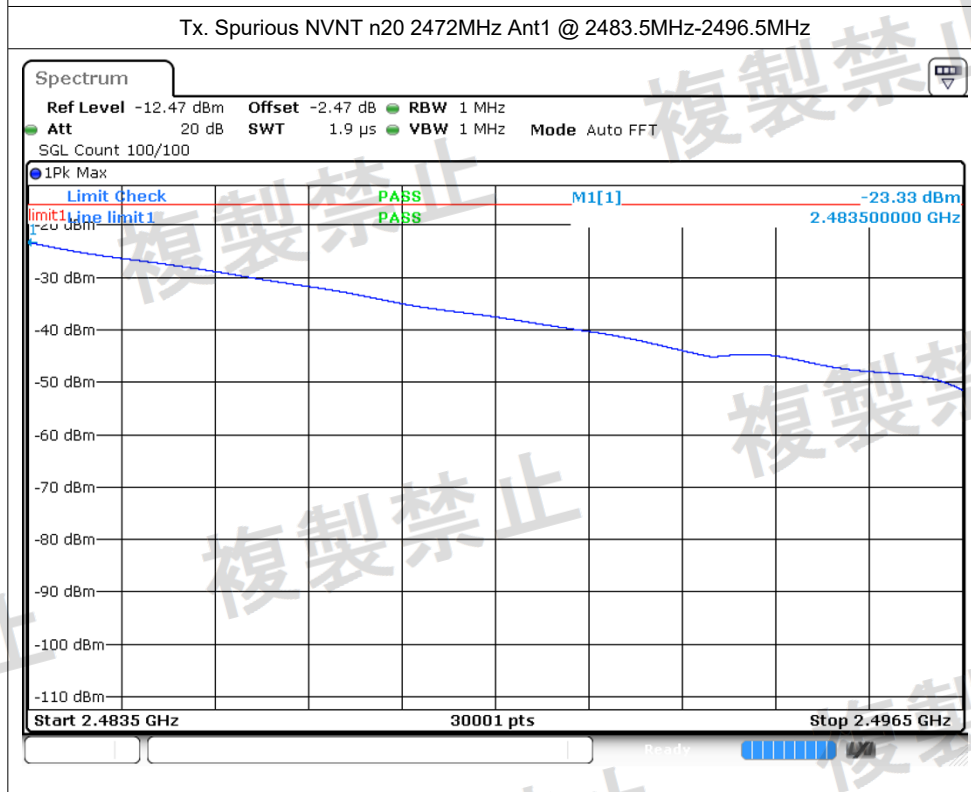
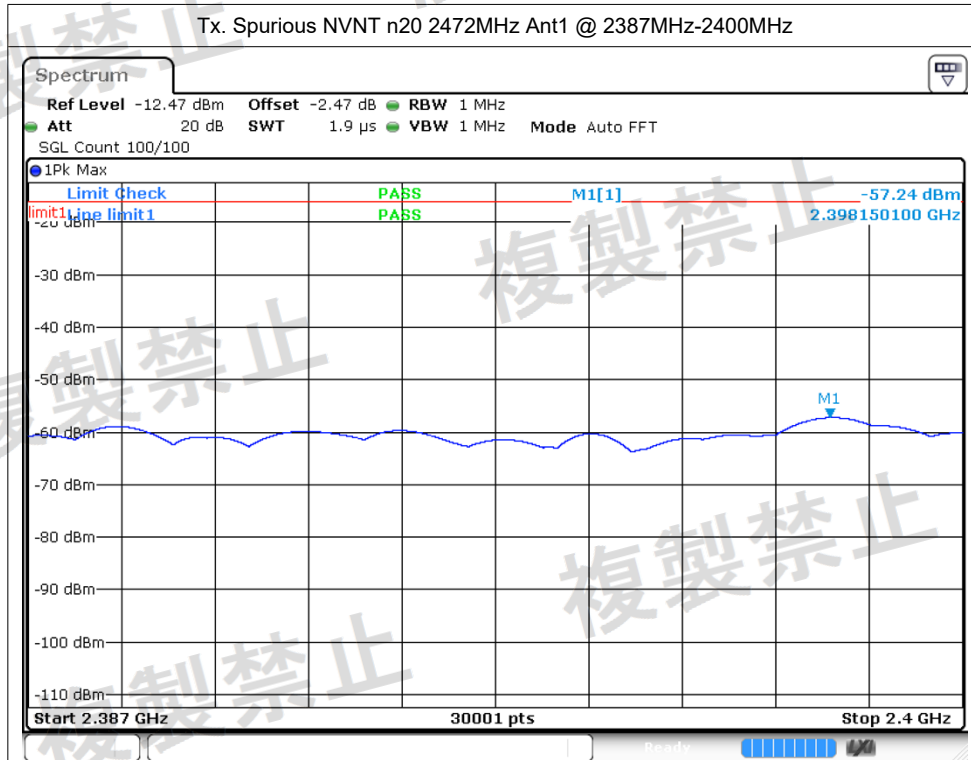


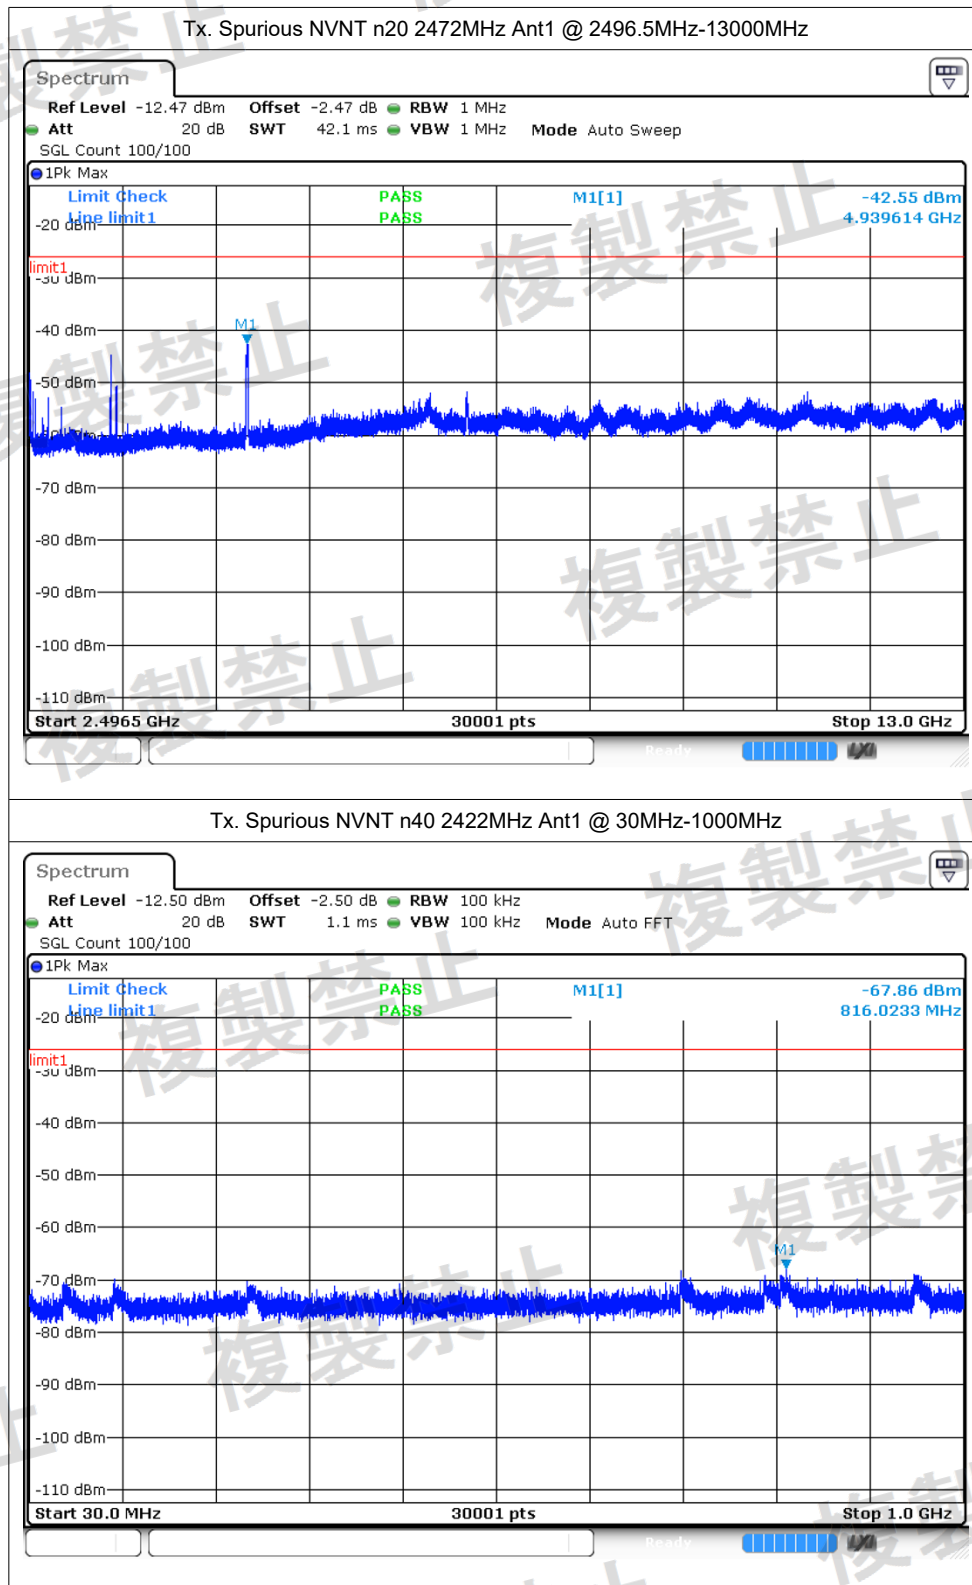


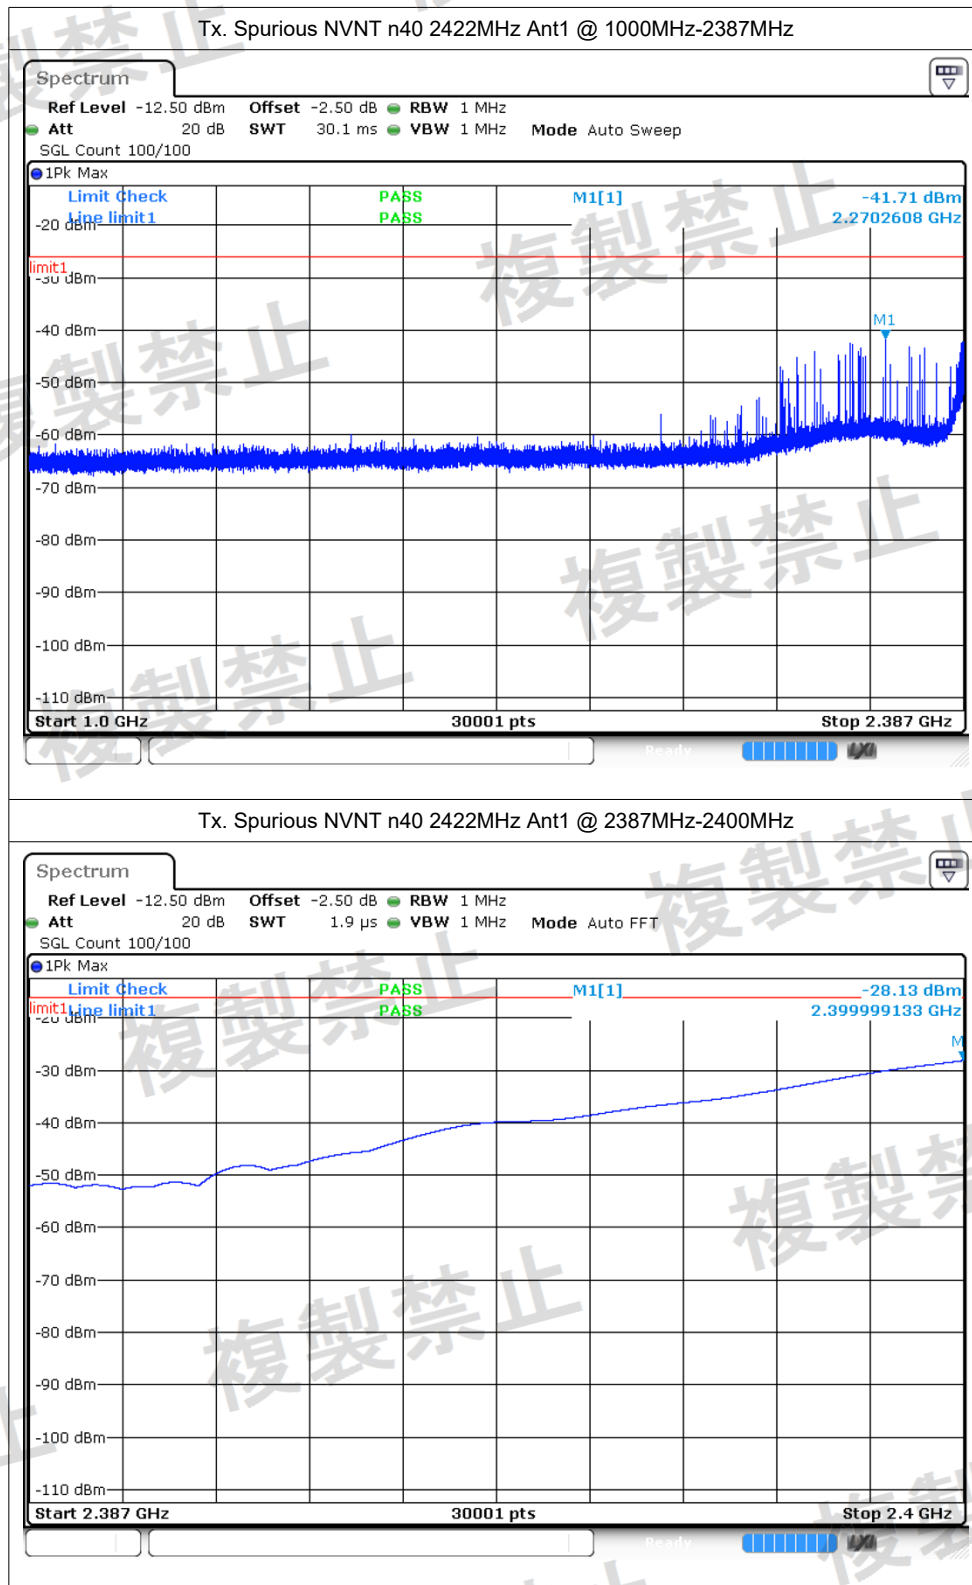


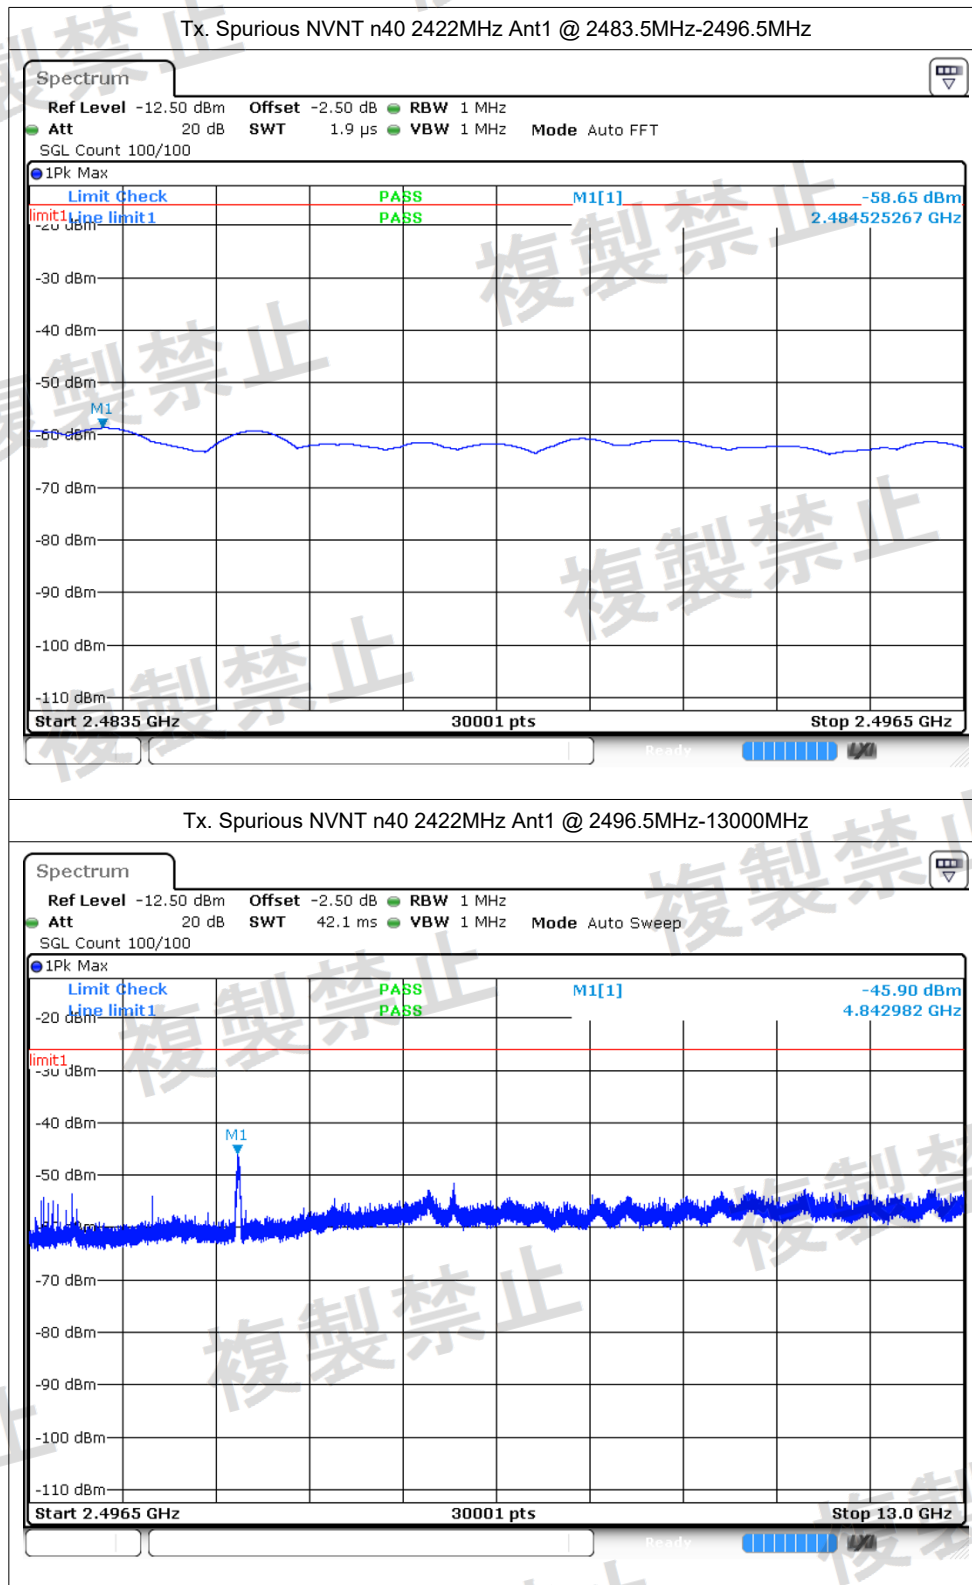


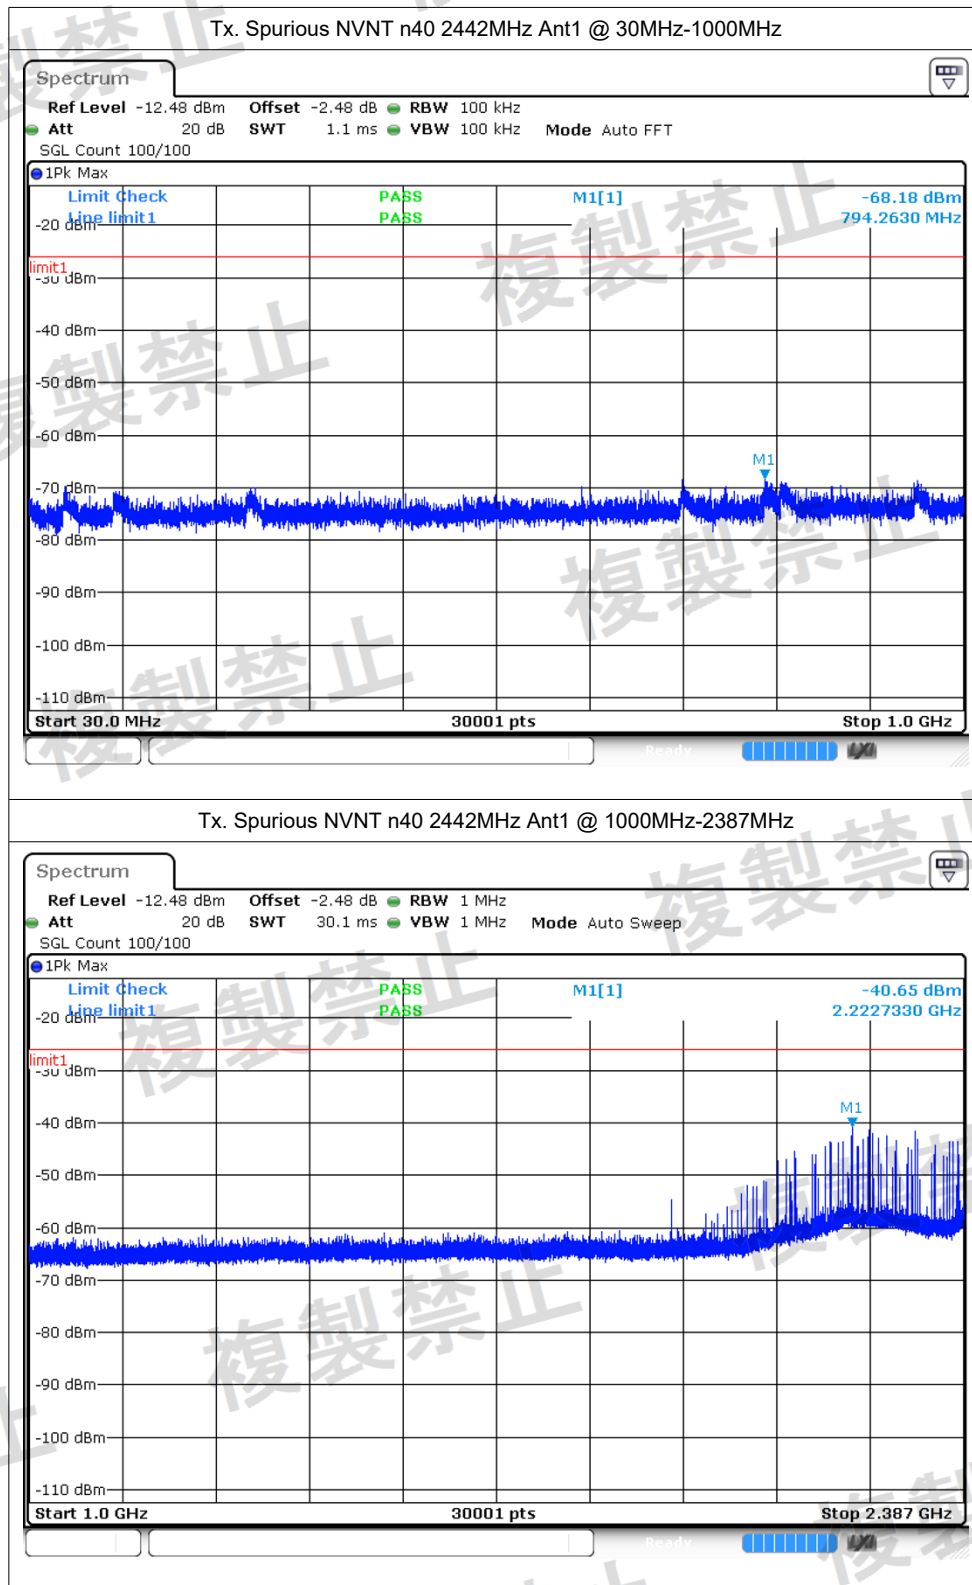


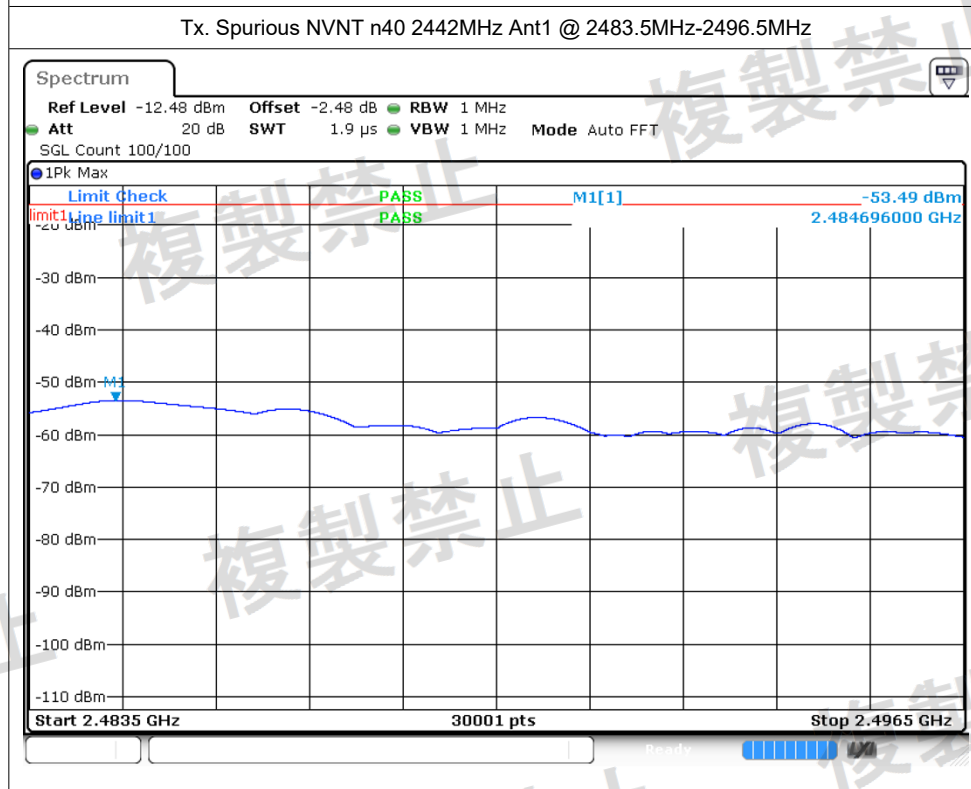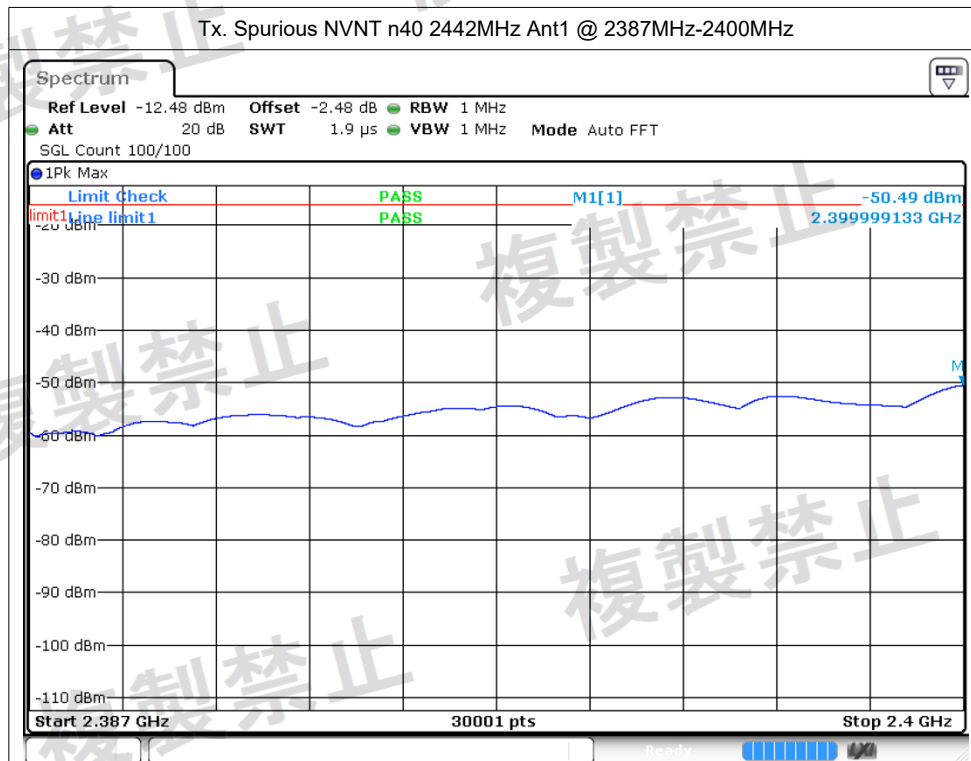


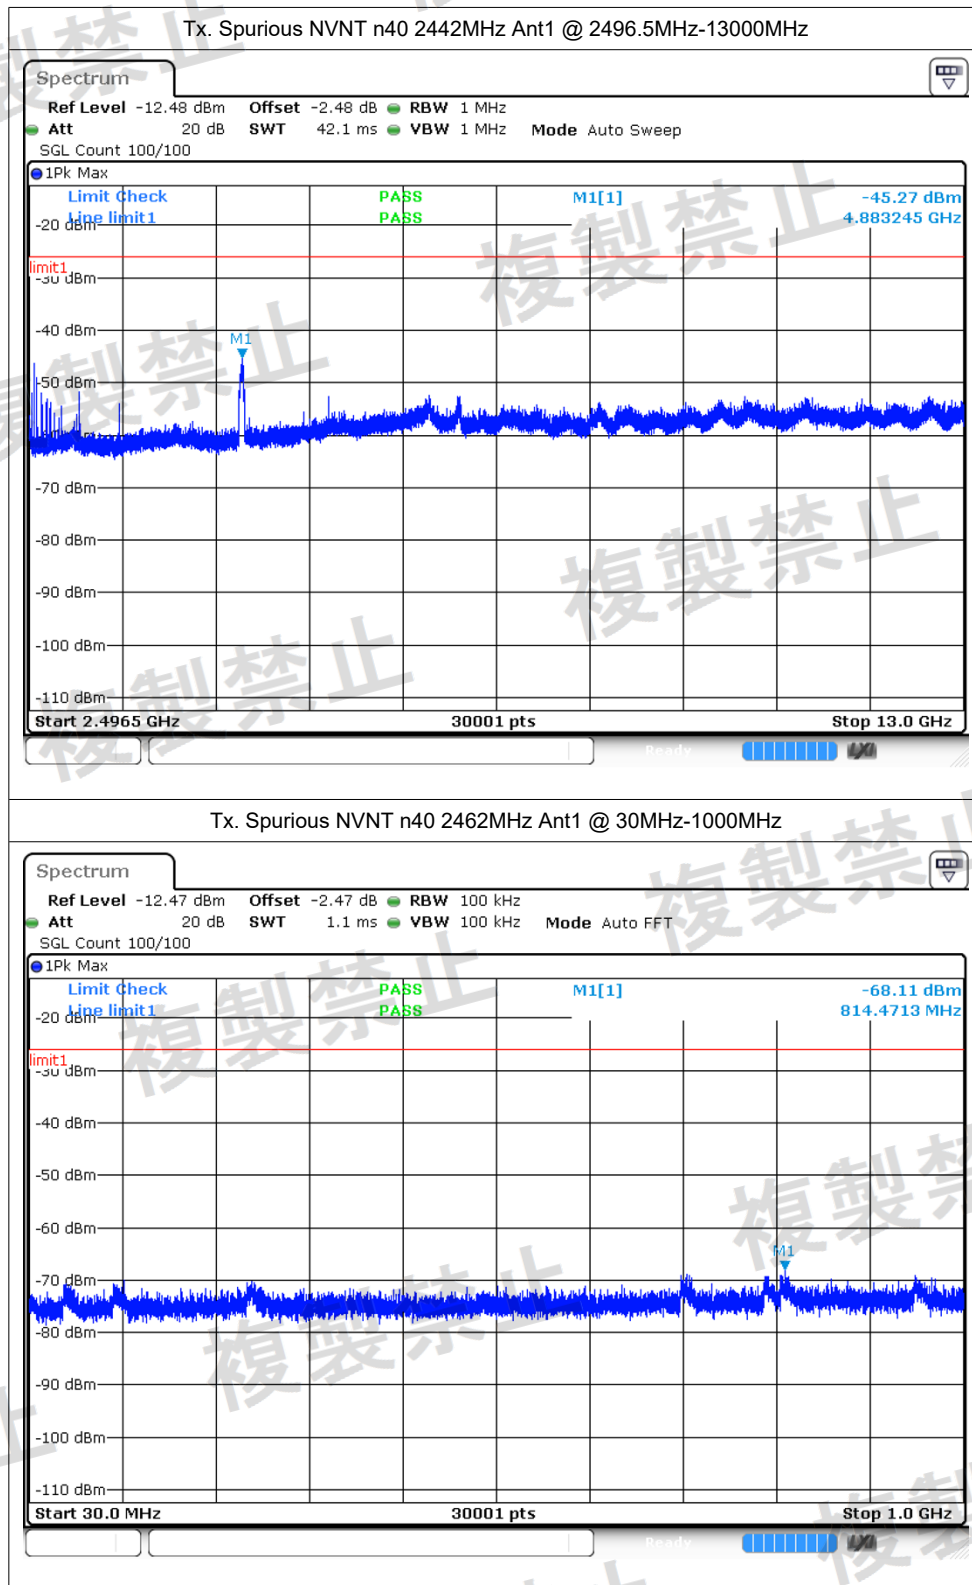


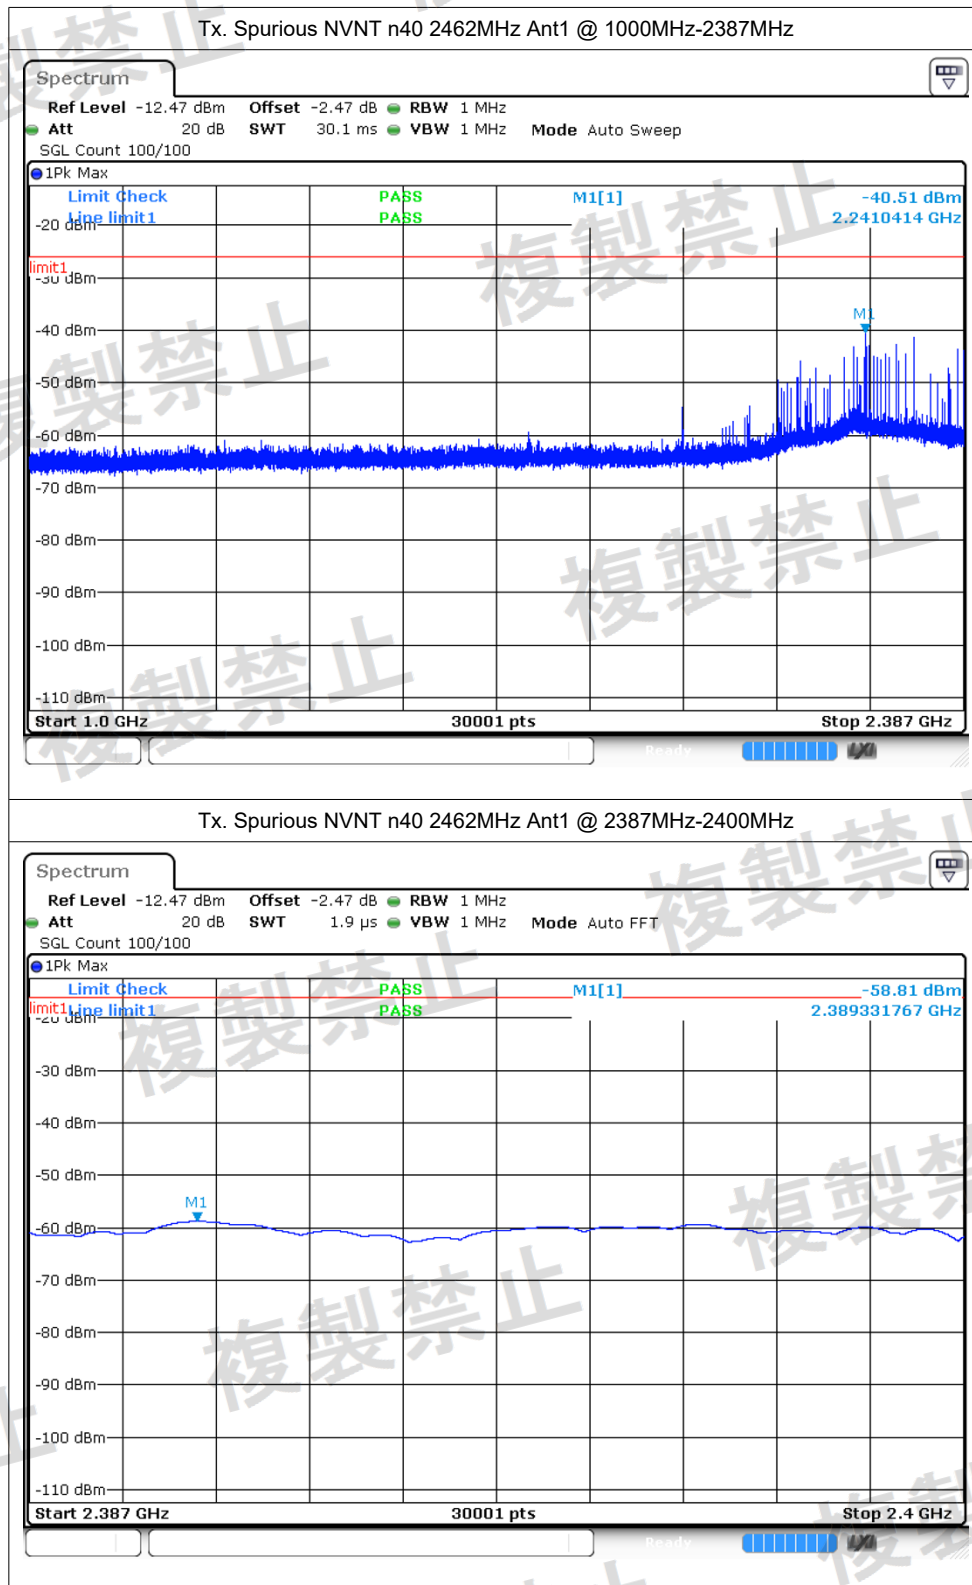


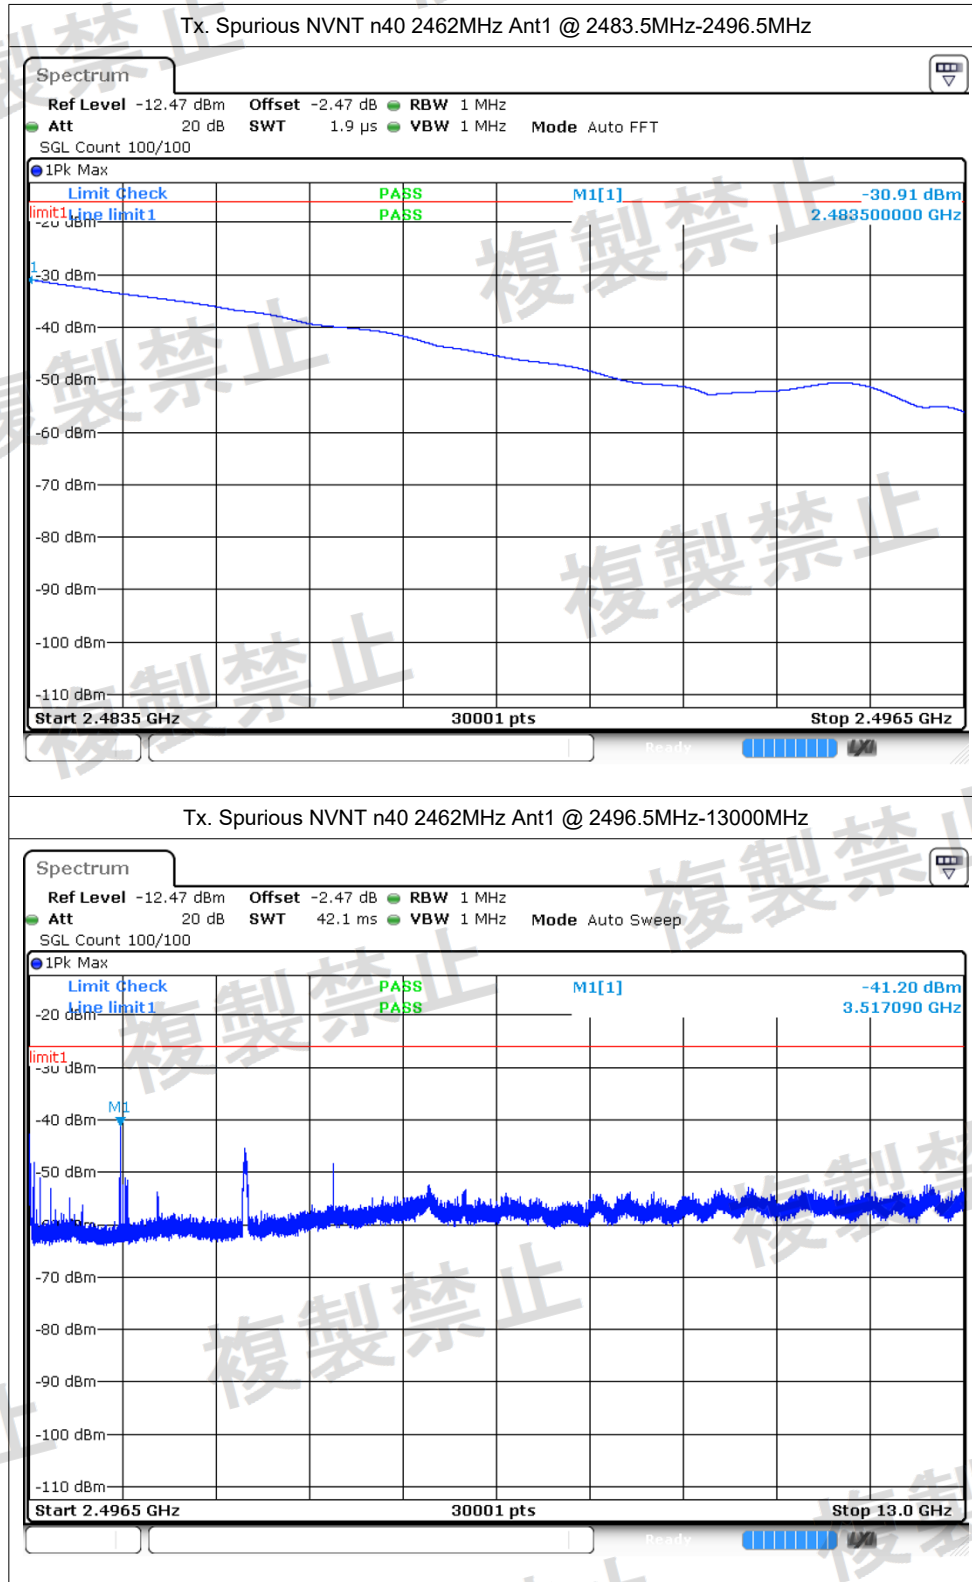


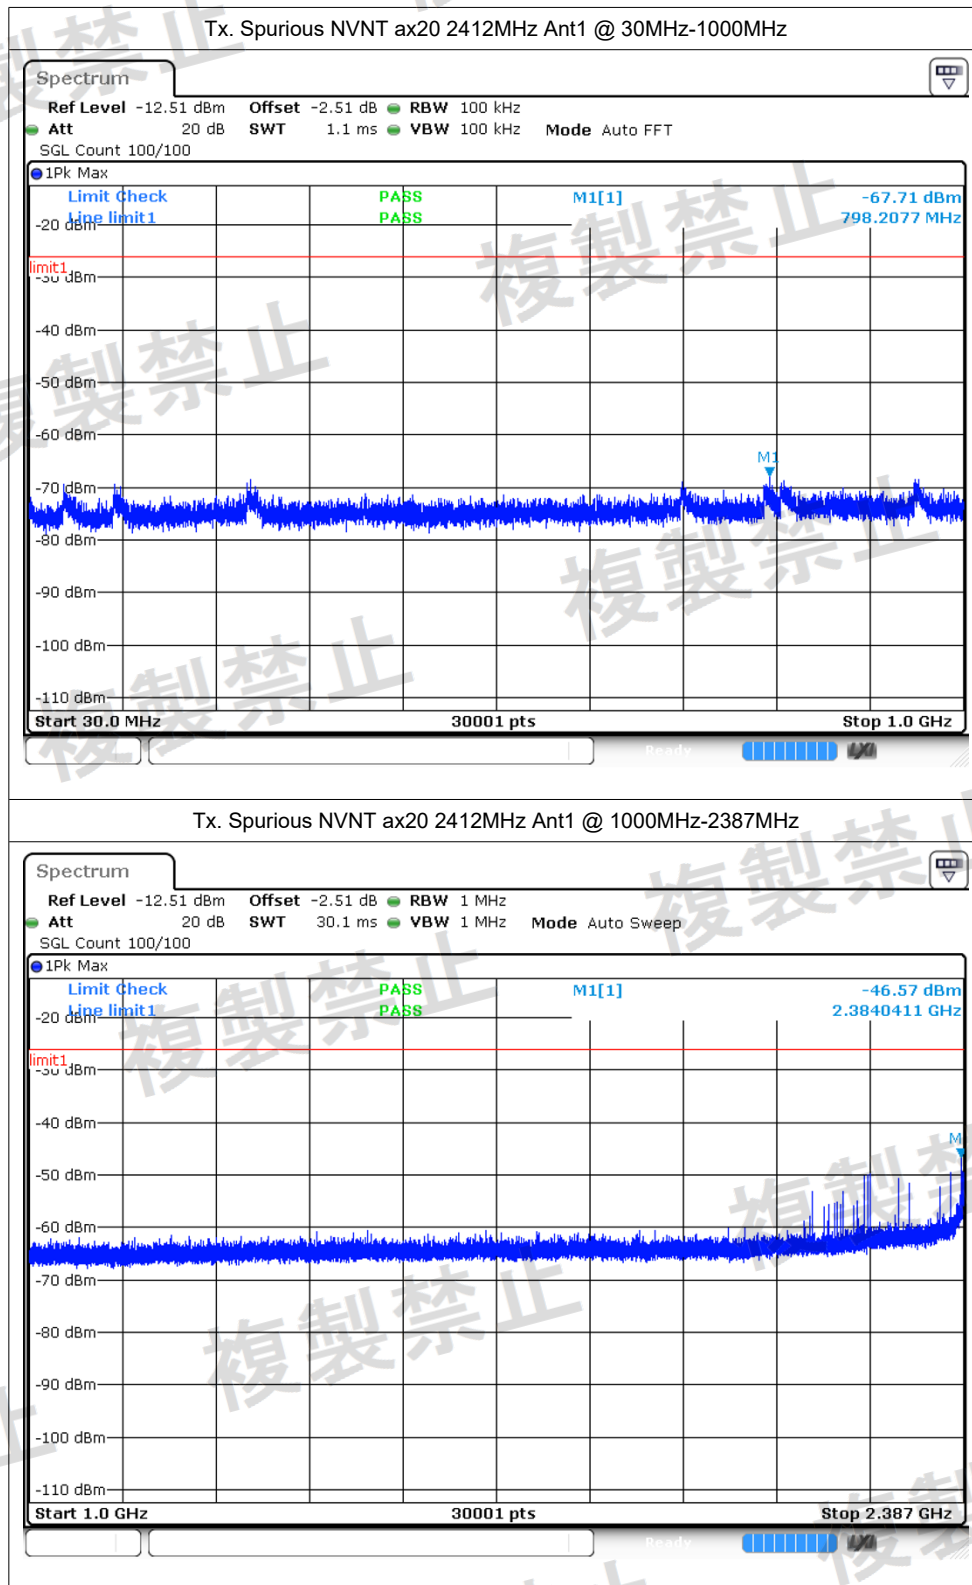


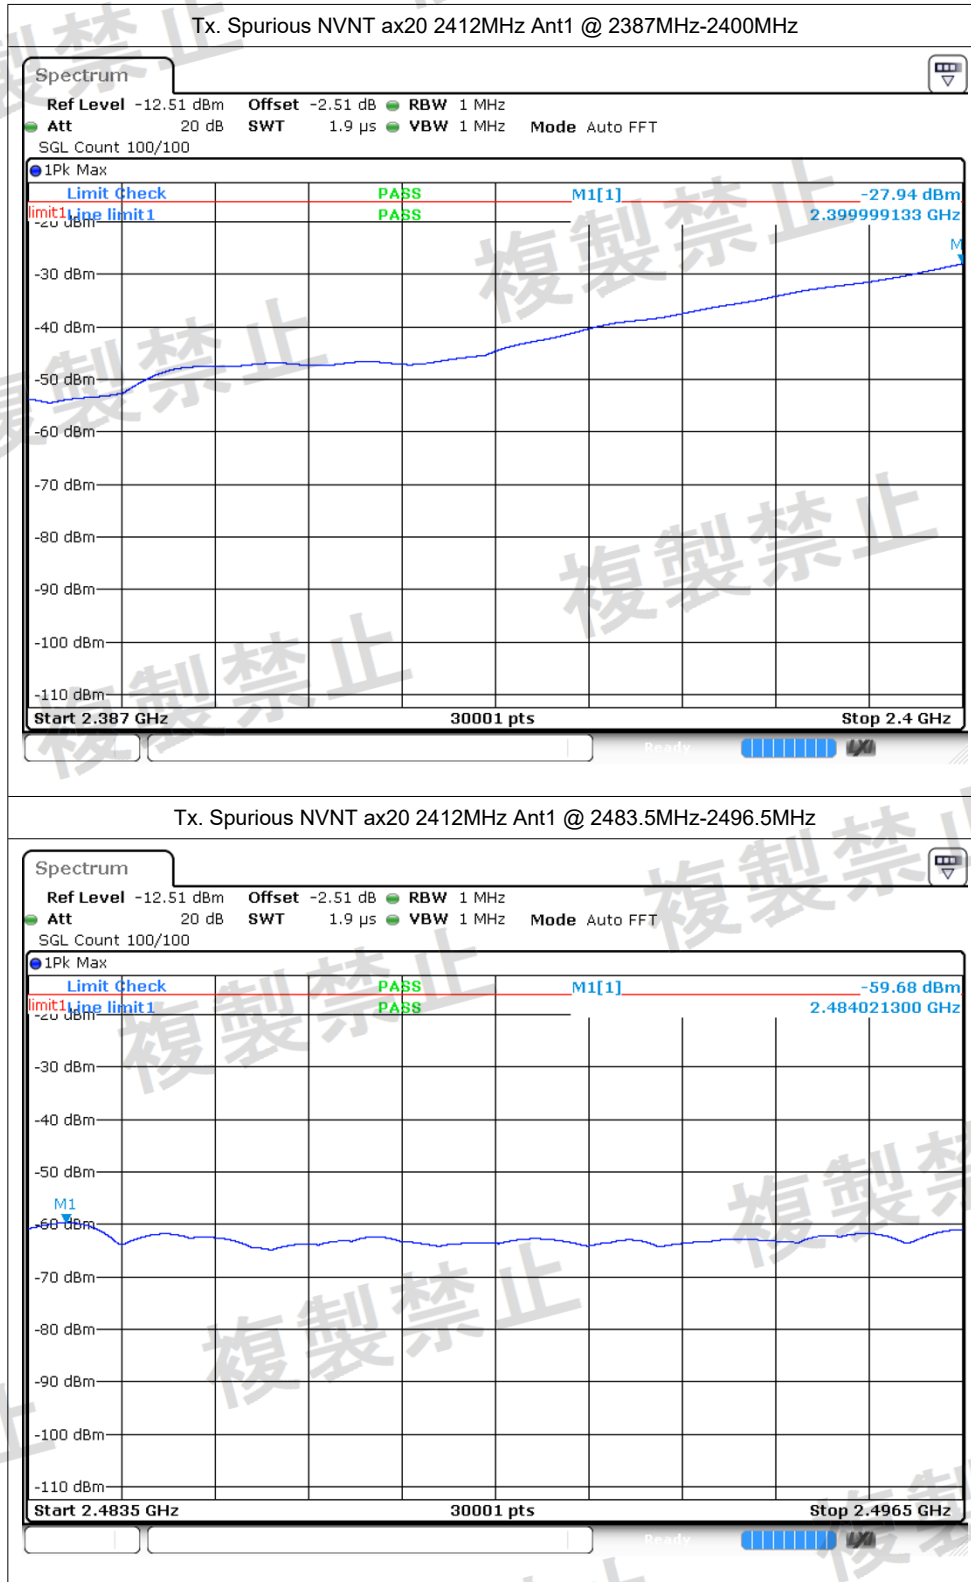


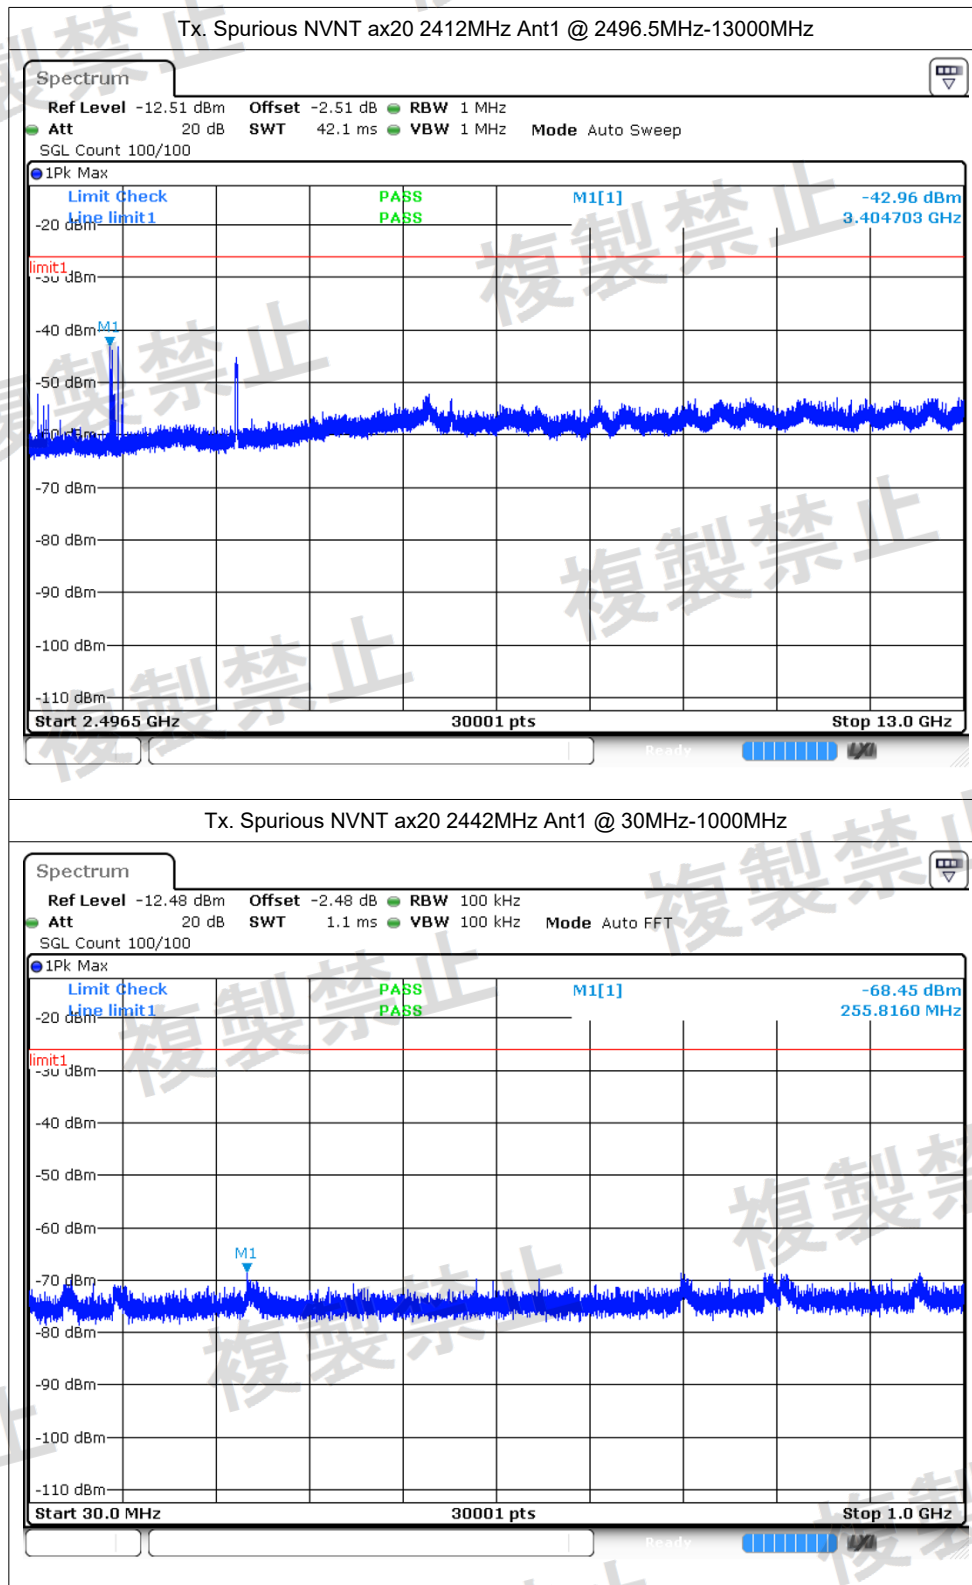


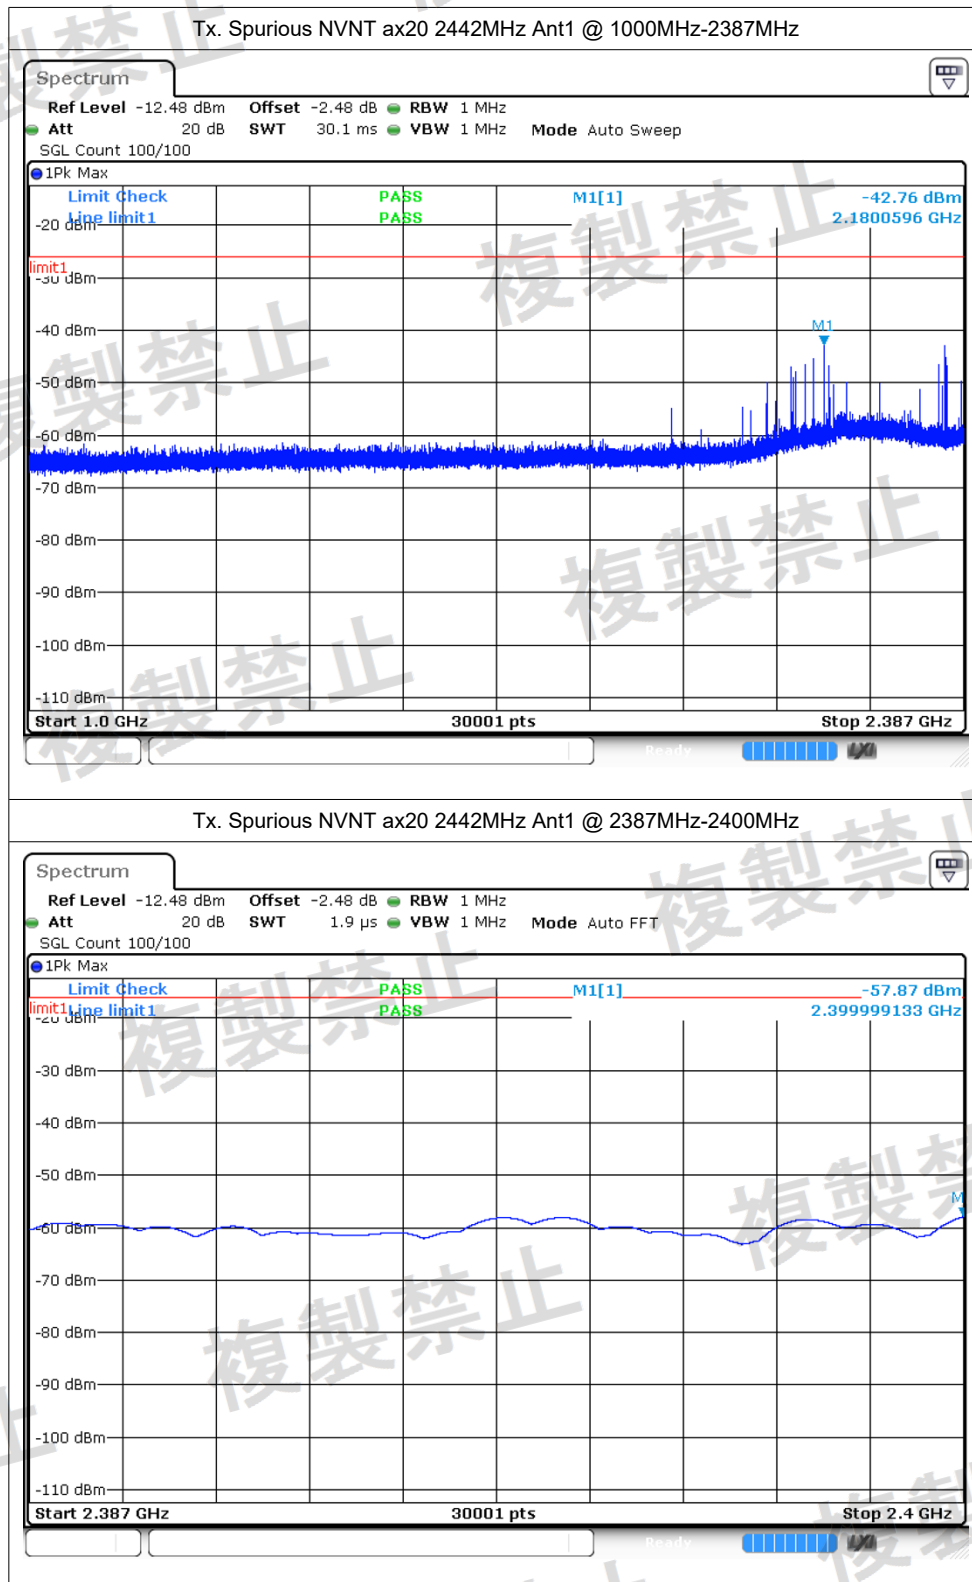


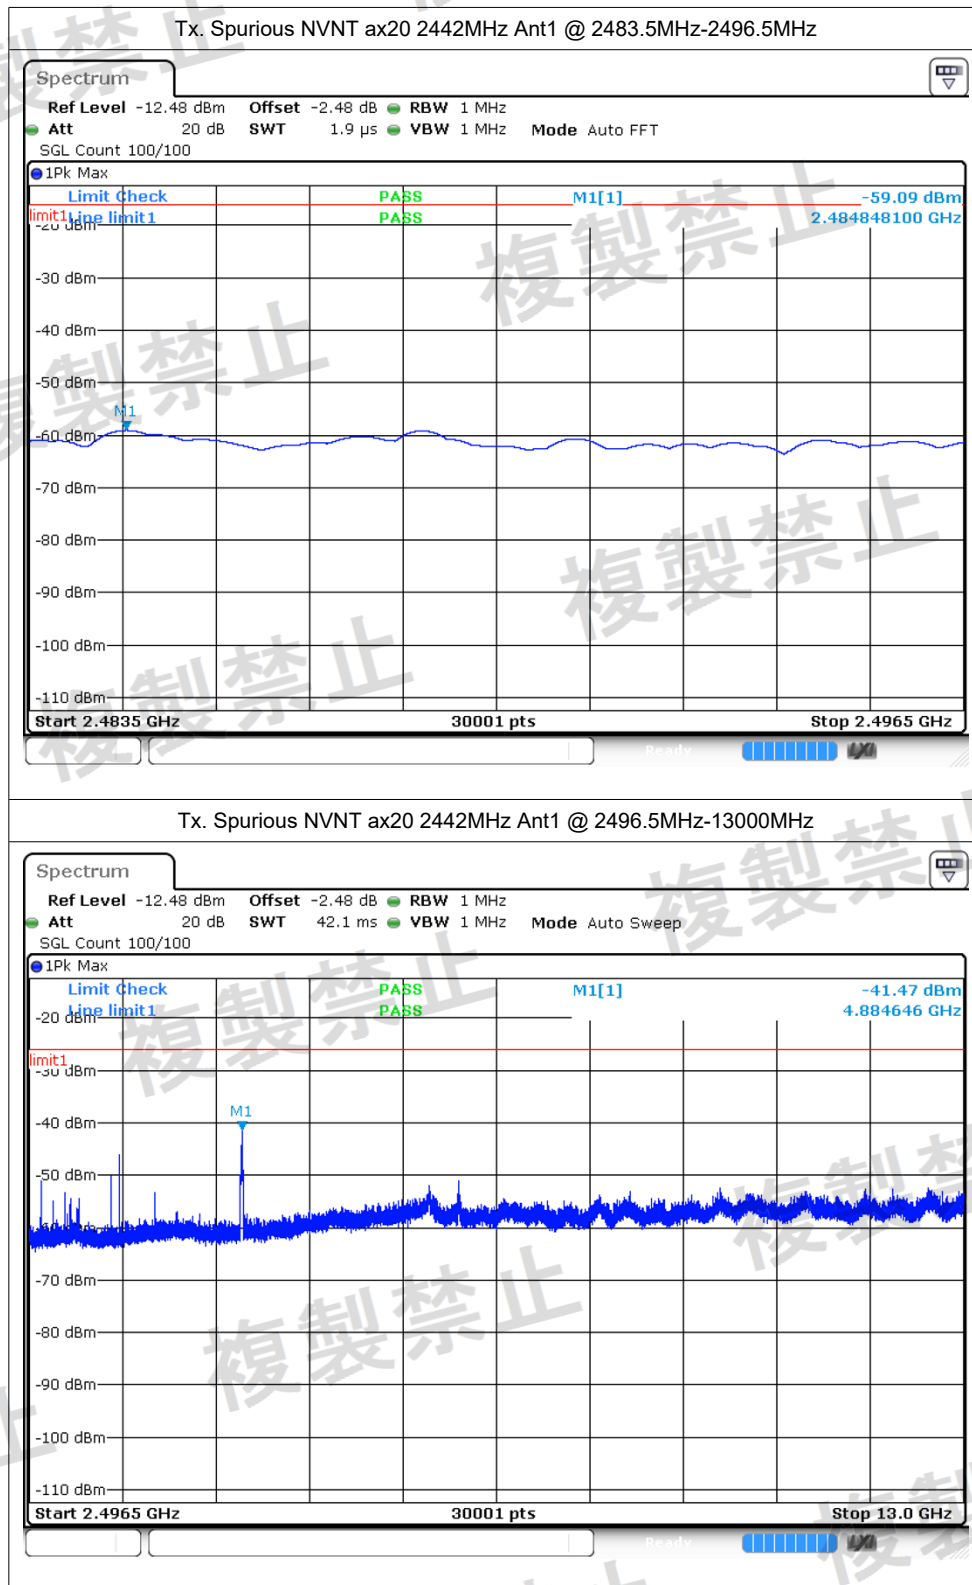


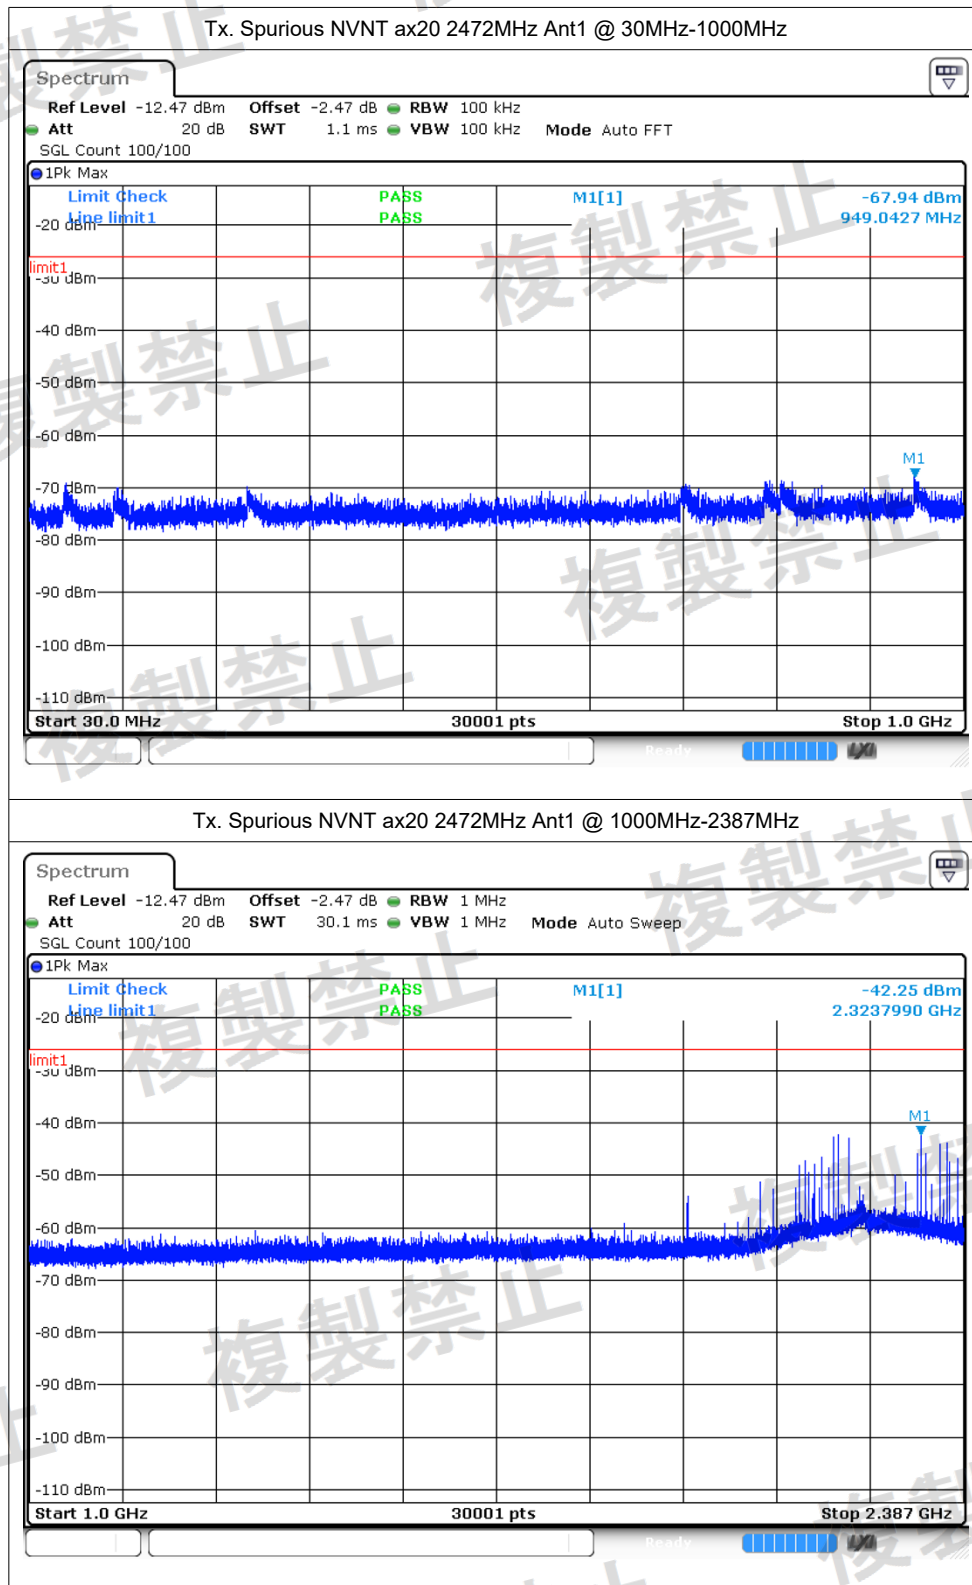



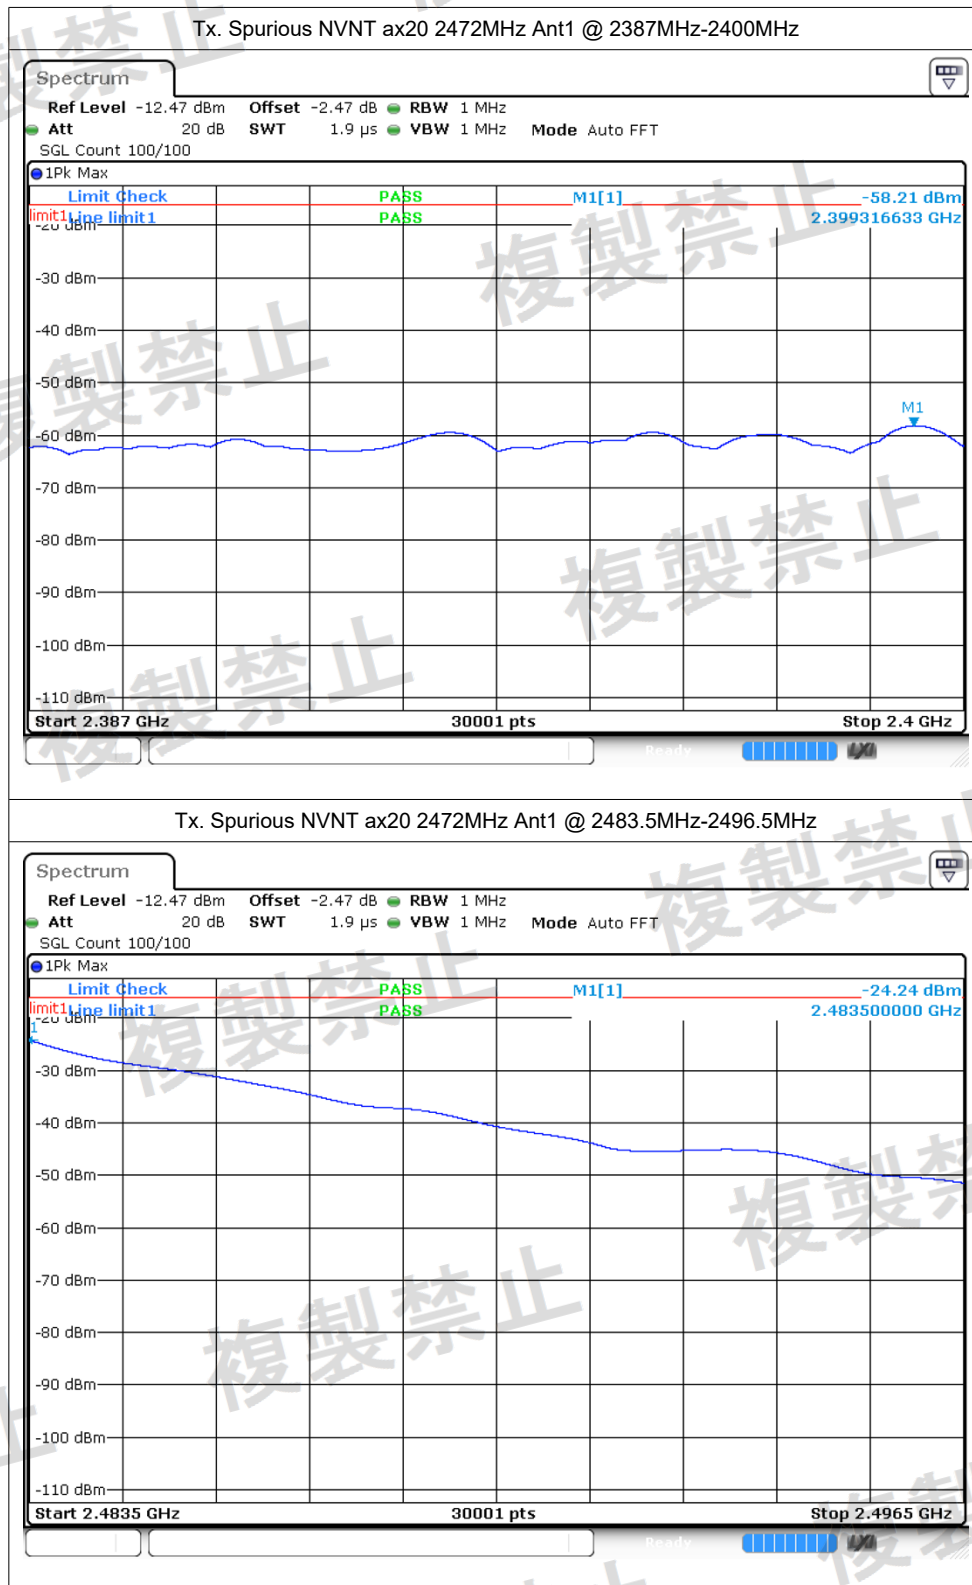


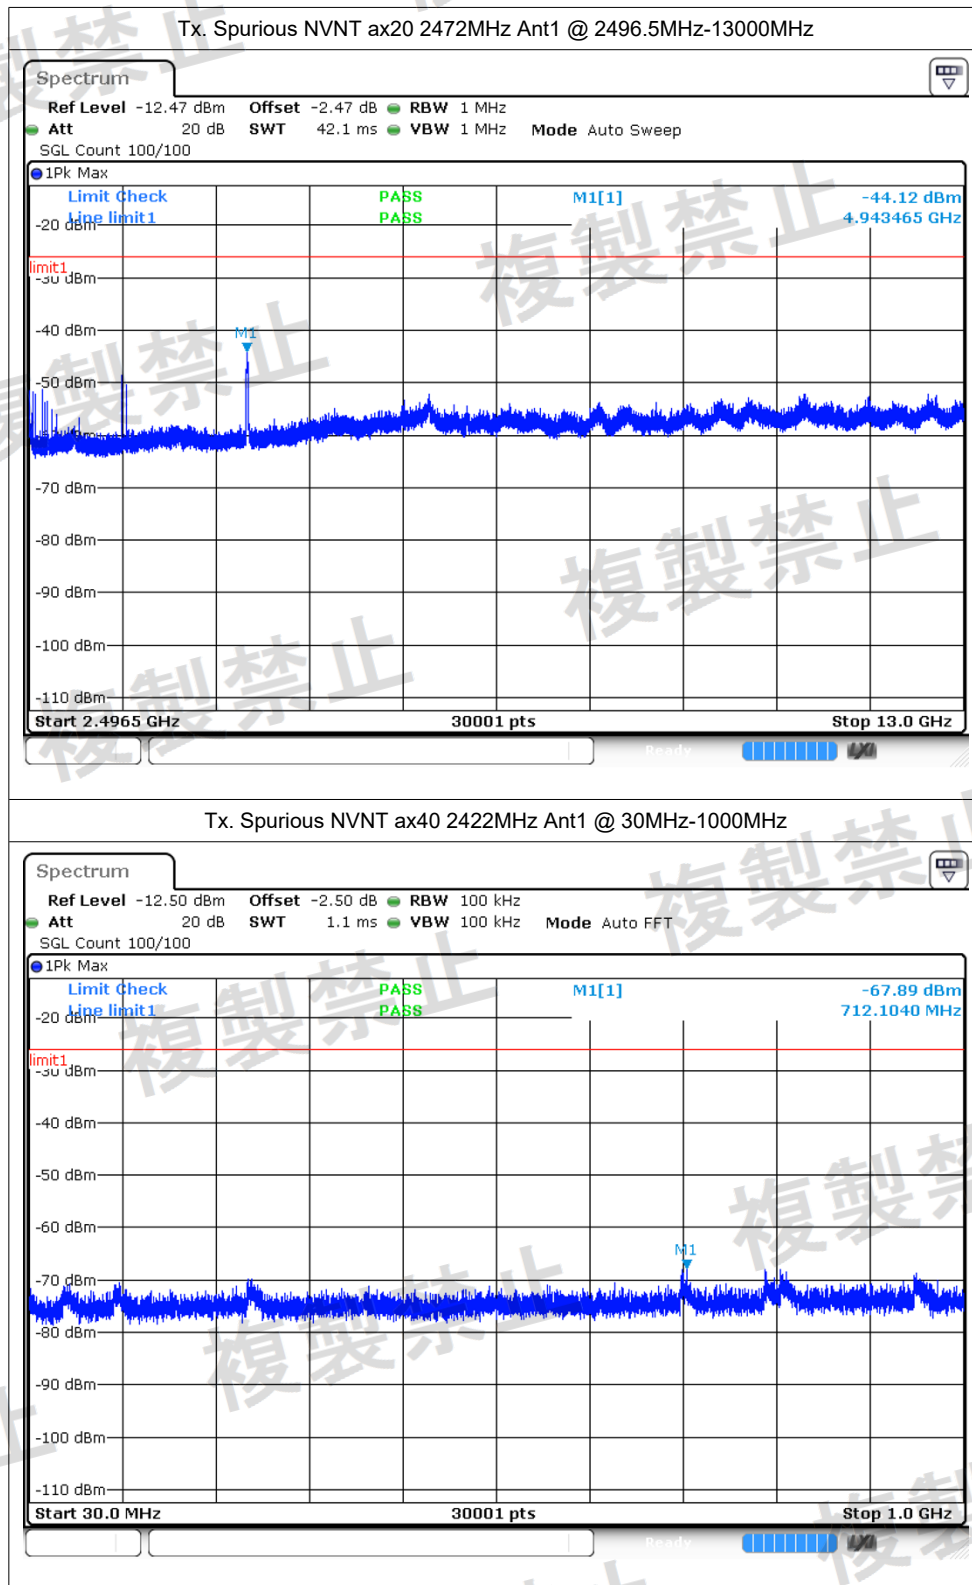


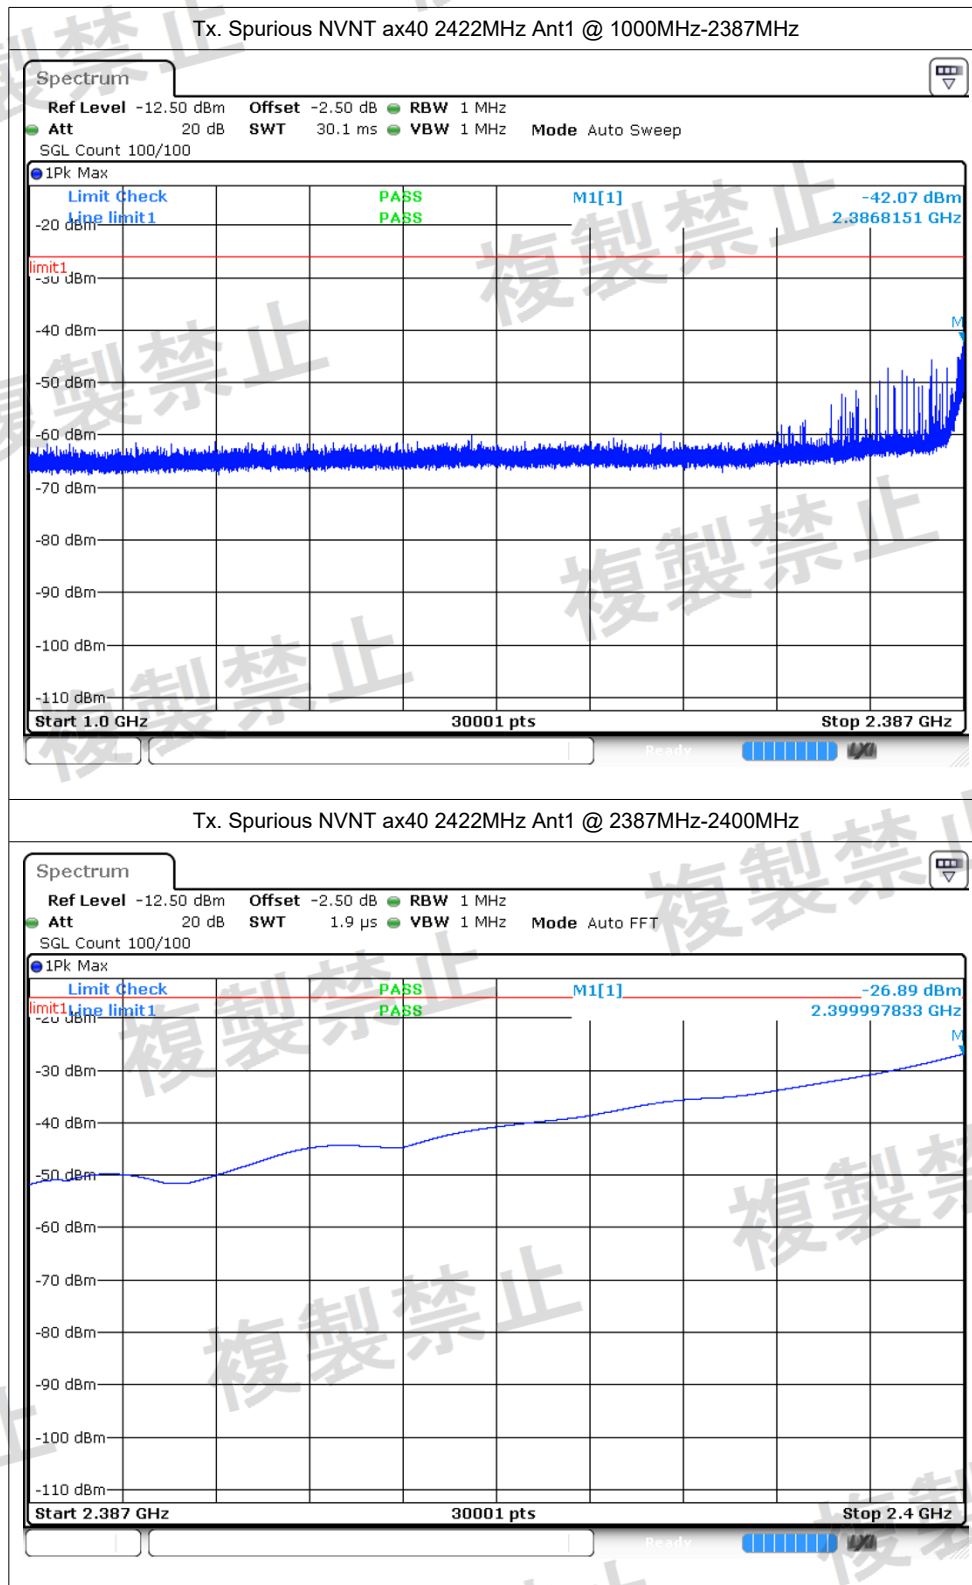



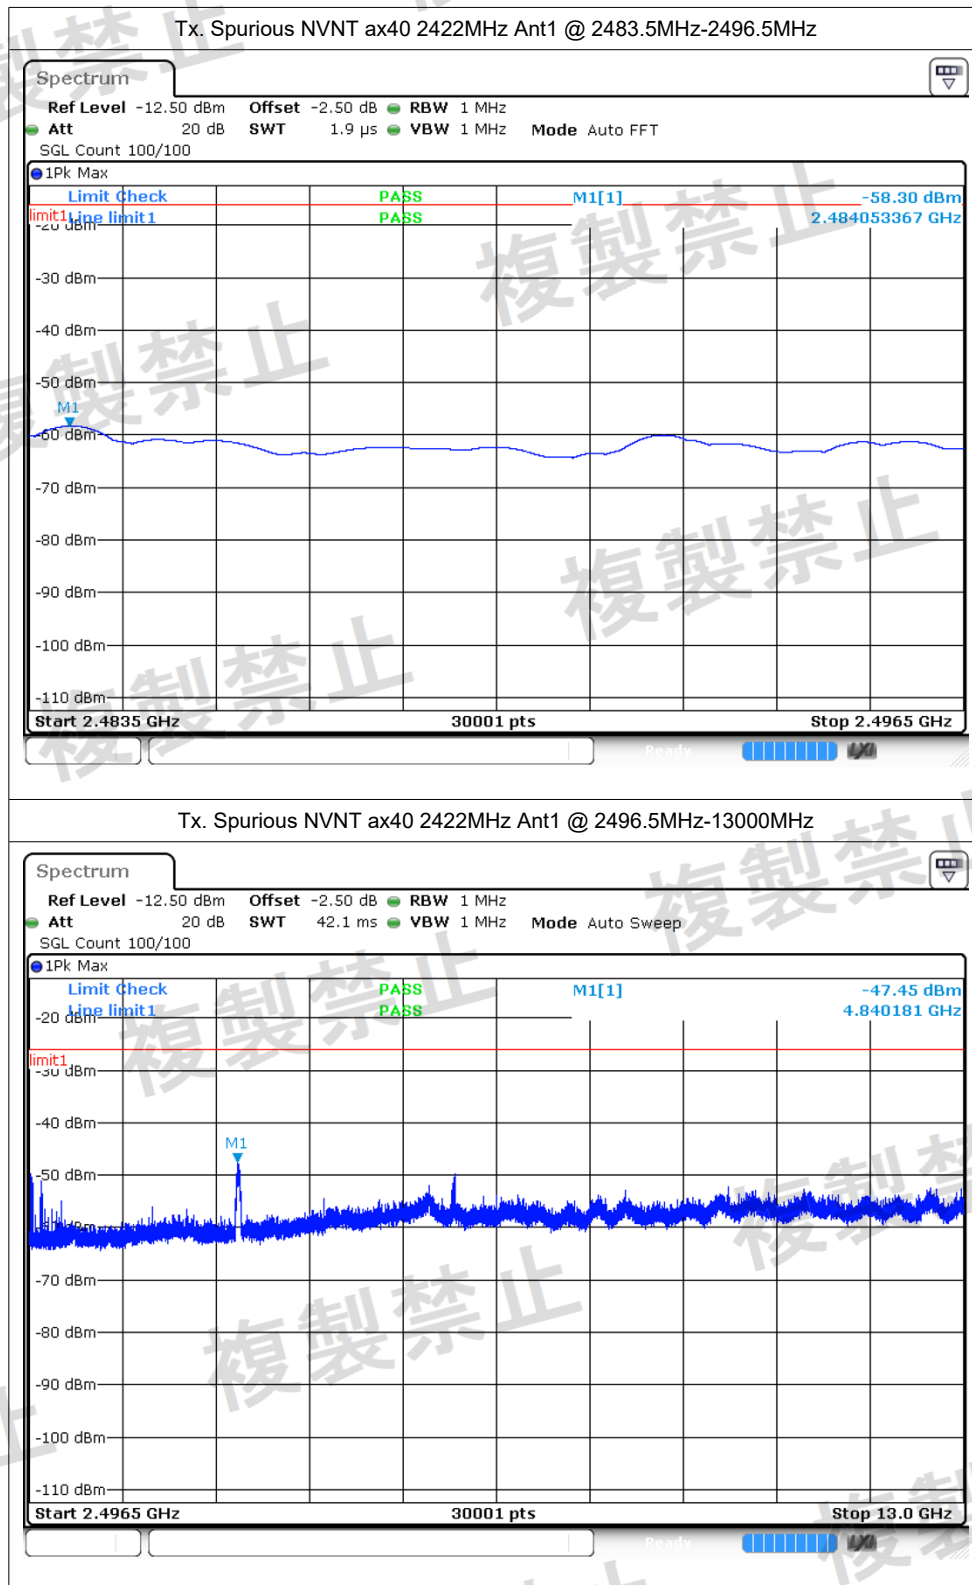


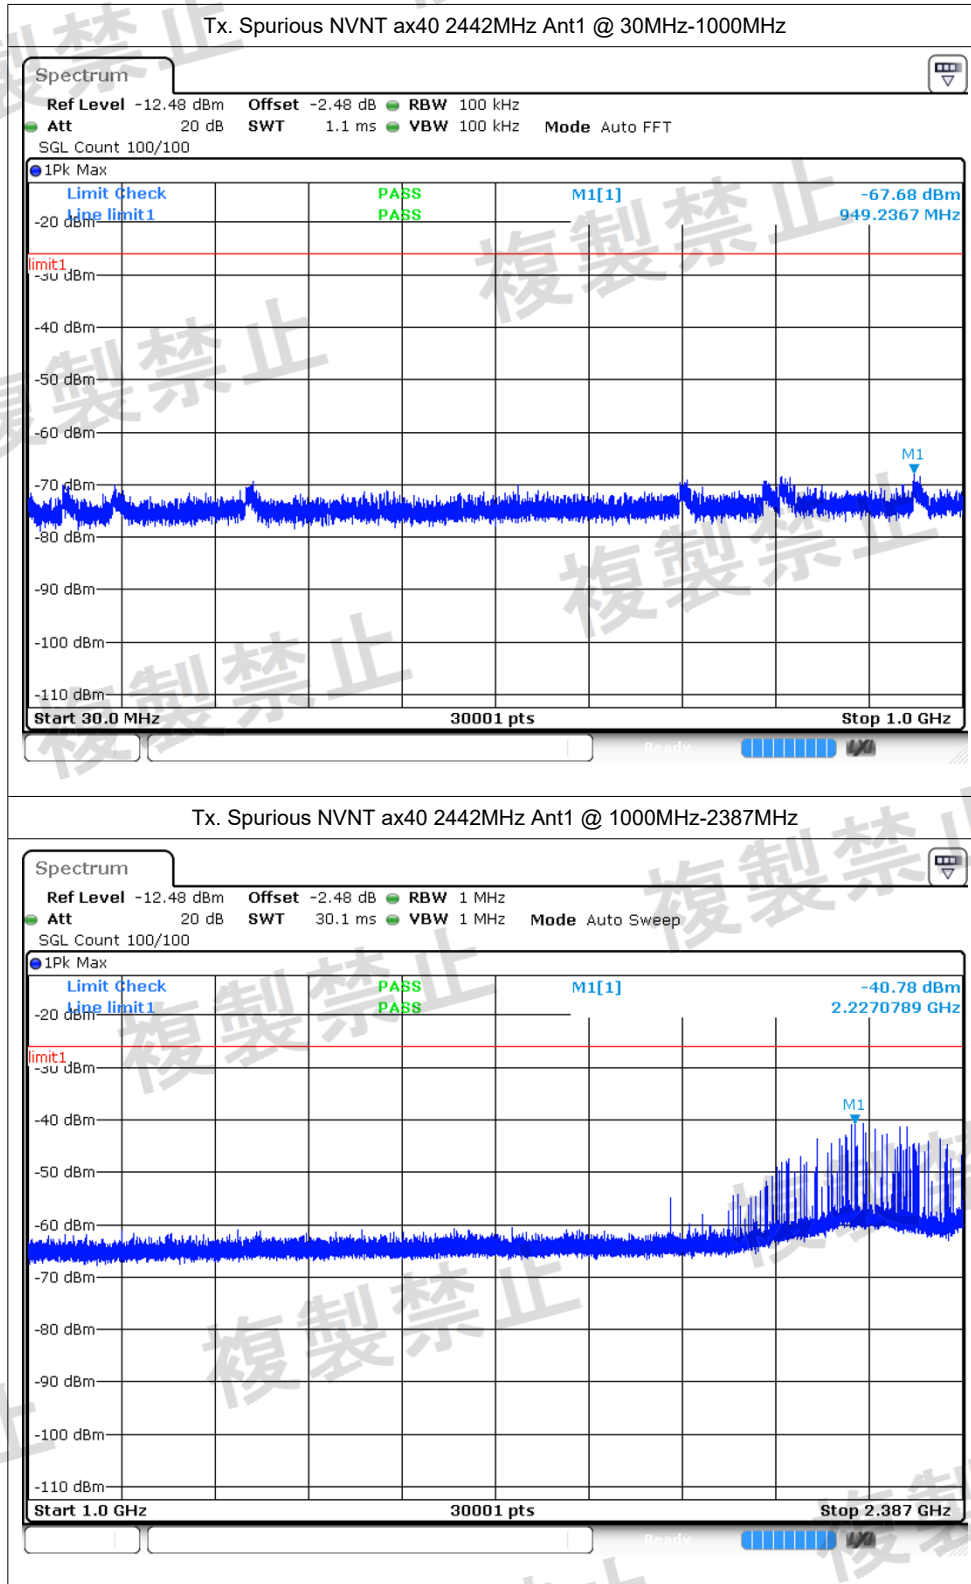

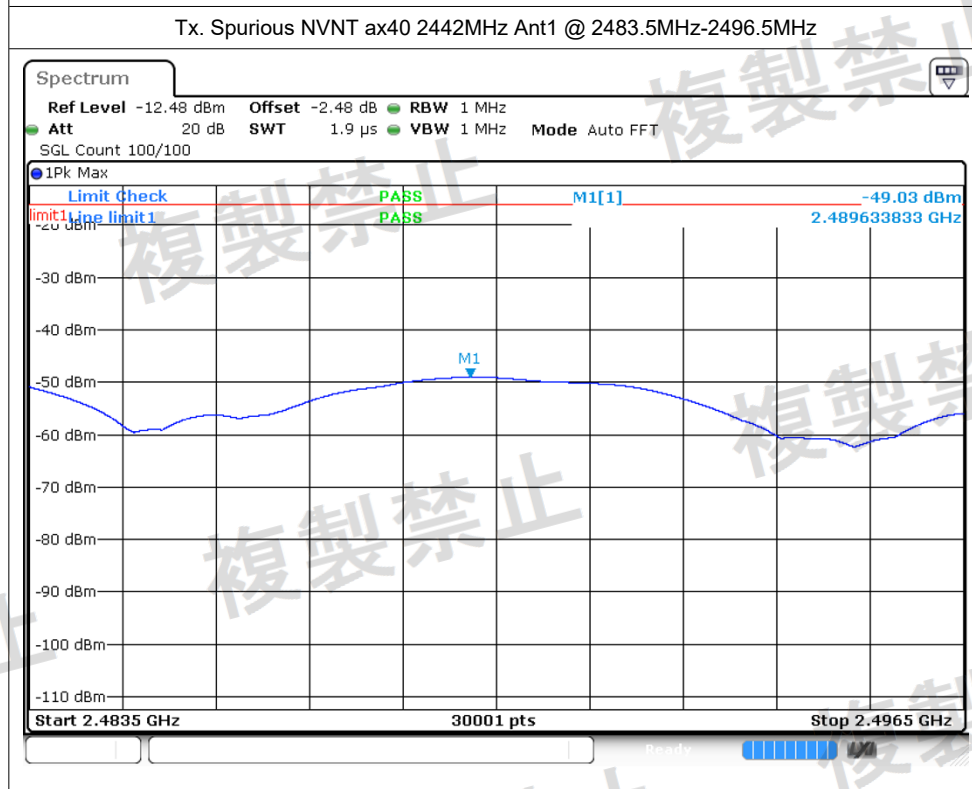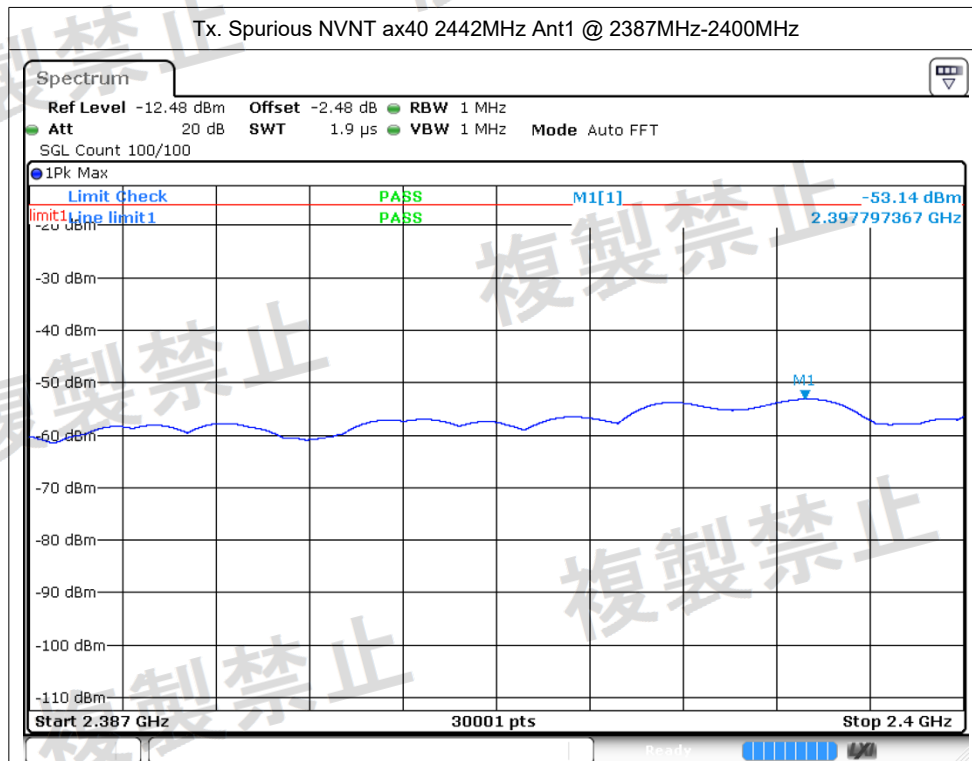

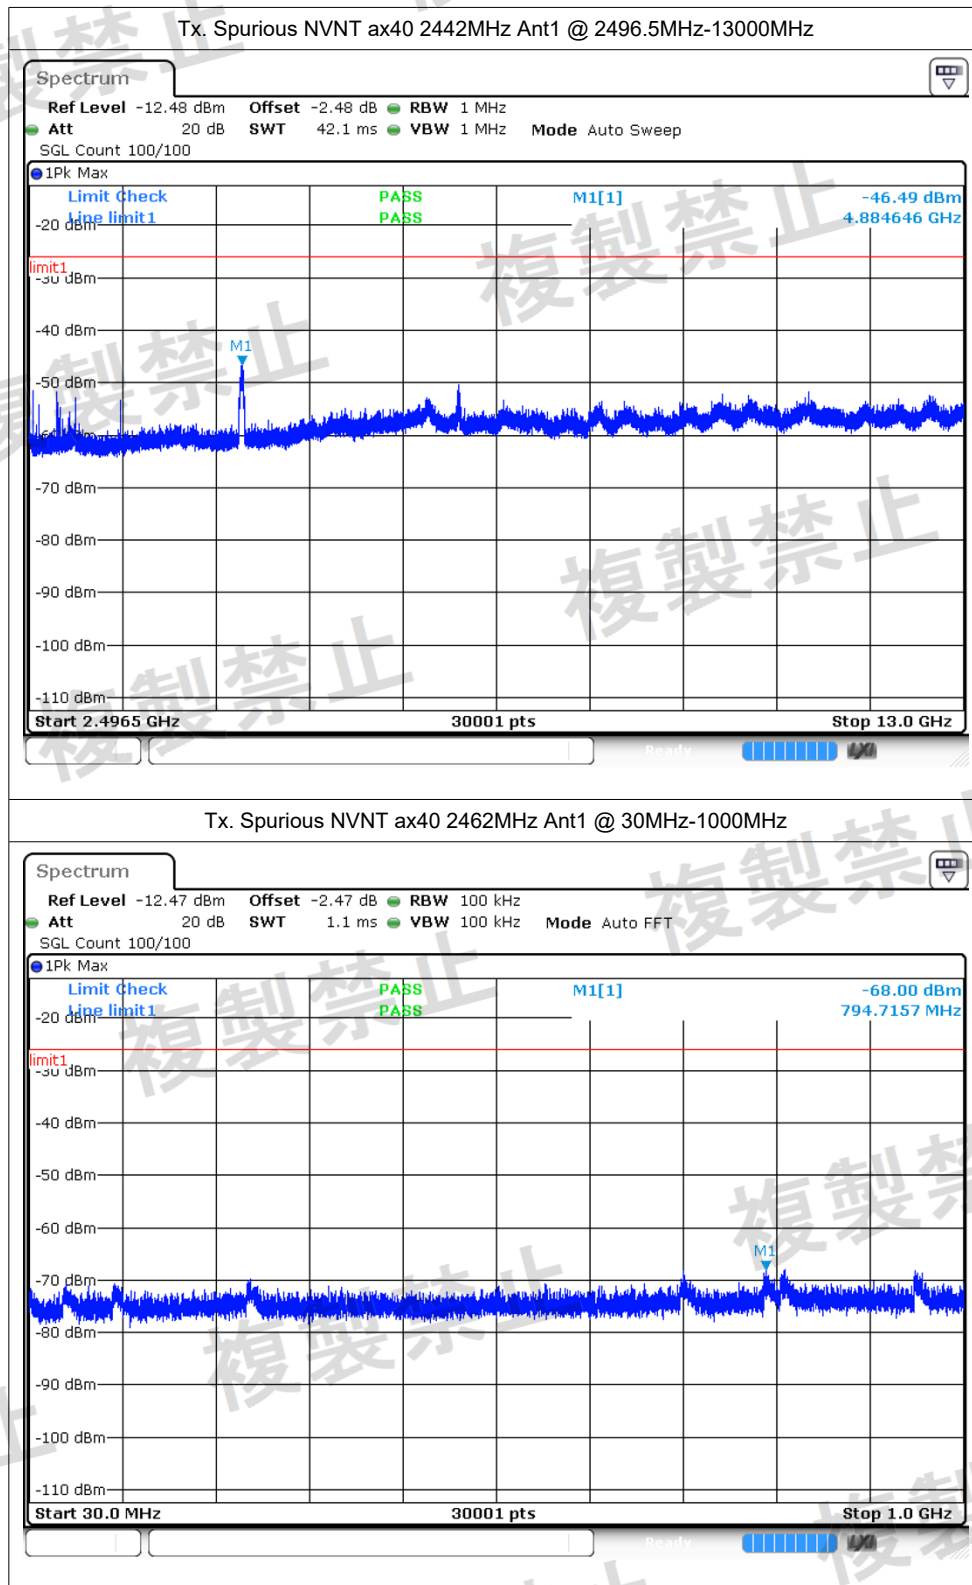

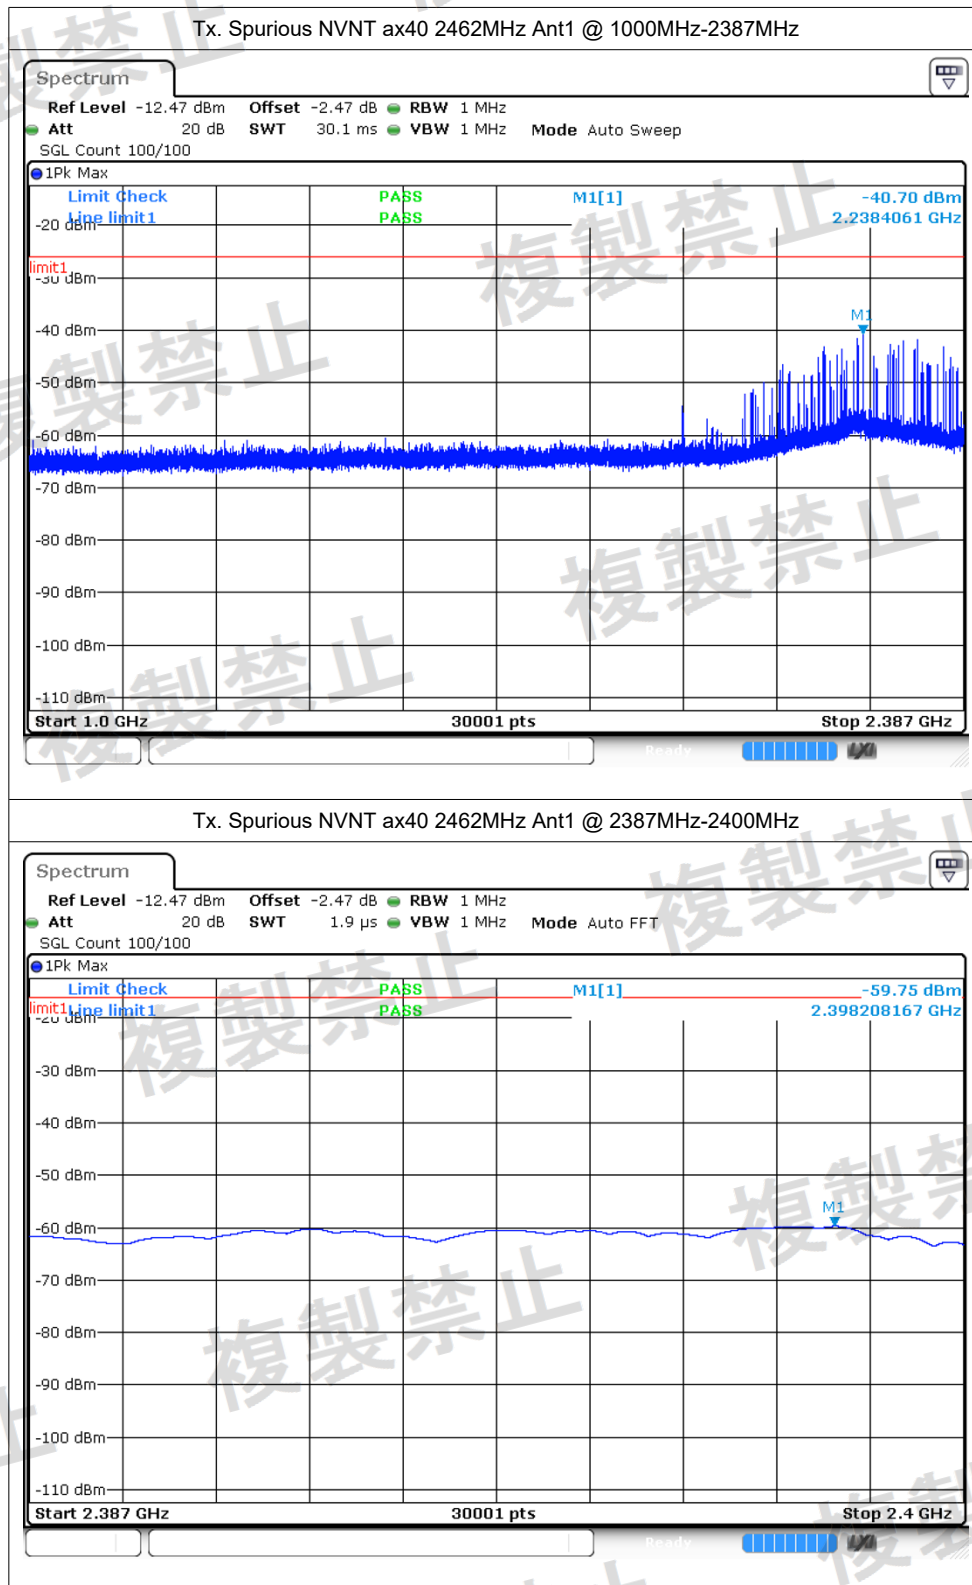

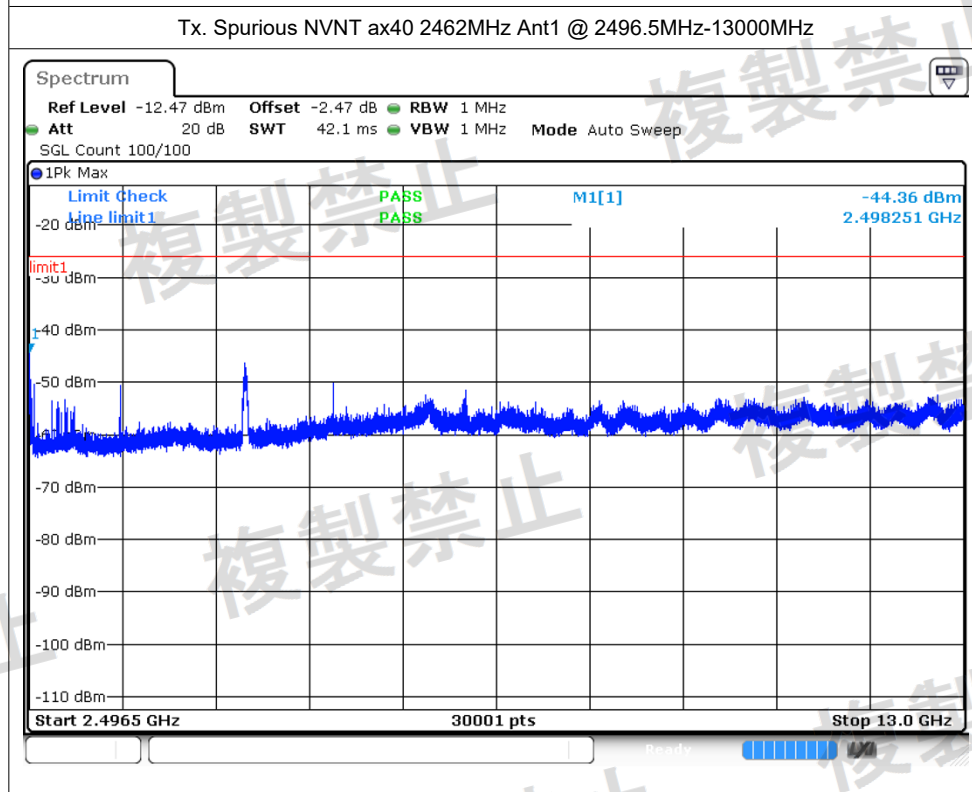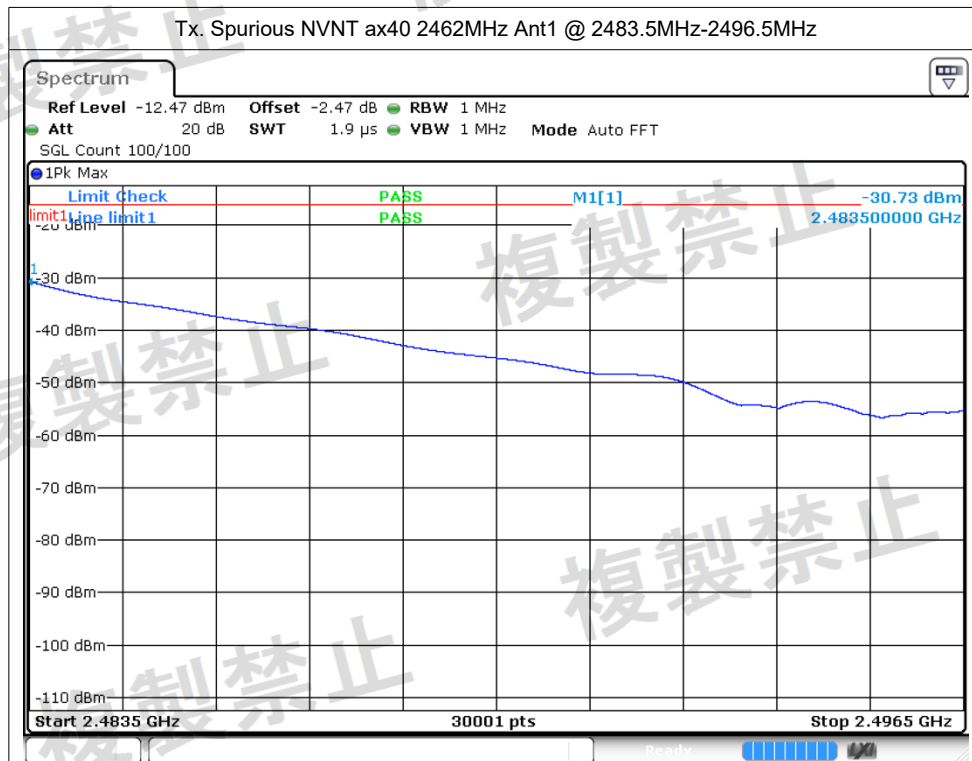

Rx Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Range (MHz)	Emission Frequency (MHz)	Max Peak Value (dBm)	Max RMS Value (dBm)	Max Peak Value (nW)	Max RMS Value (nW)	Limit (nW)	Verdict
NVNT	b	2412	Ant1	30-1000	956.04	-73.77	NA	0.042	NA	4	Pass
NVNT	b	2412	Ant1	1000-13000	1743.38	-68.26	NA	0.1493	NA	20	Pass
NVNT	b	2442	Ant1	30-1000	953.20	-72.47	NA	0.0566	NA	4	Pass
NVNT	b	2442	Ant1	1000-13000	2439.35	-59.89	NA	1.0257	NA	20	Pass
NVNT	b	2472	Ant1	30-1000	953.20	-72.31	NA	0.0587	NA	4	Pass
NVNT	b	2472	Ant1	1000-13000	4852.07	-68.07	NA	0.156	NA	20	Pass
NVNT	n40	2422	Ant1	30-1000	952.94	-72.38	NA	0.0578	NA	4	Pass
NVNT	n40	2422	Ant1	1000-13000	2410.55	-56.35	-64.85	2.3174	0.3273	20	Pass
NVNT	n40	2442	Ant1	30-1000	952.26	-72.05	NA	0.0624	NA	4	Pass
NVNT	n40	2442	Ant1	1000-13000	1758.57	-62.03	NA	0.6266	NA	20	Pass
NVNT	n40	2462	Ant1	30-1000	954.95	-73.40	NA	0.0457	NA	4	Pass
NVNT	n40	2462	Ant1	1000-13000	12659.01	-72.48	NA	0.0565	NA	20	Pass

