


Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

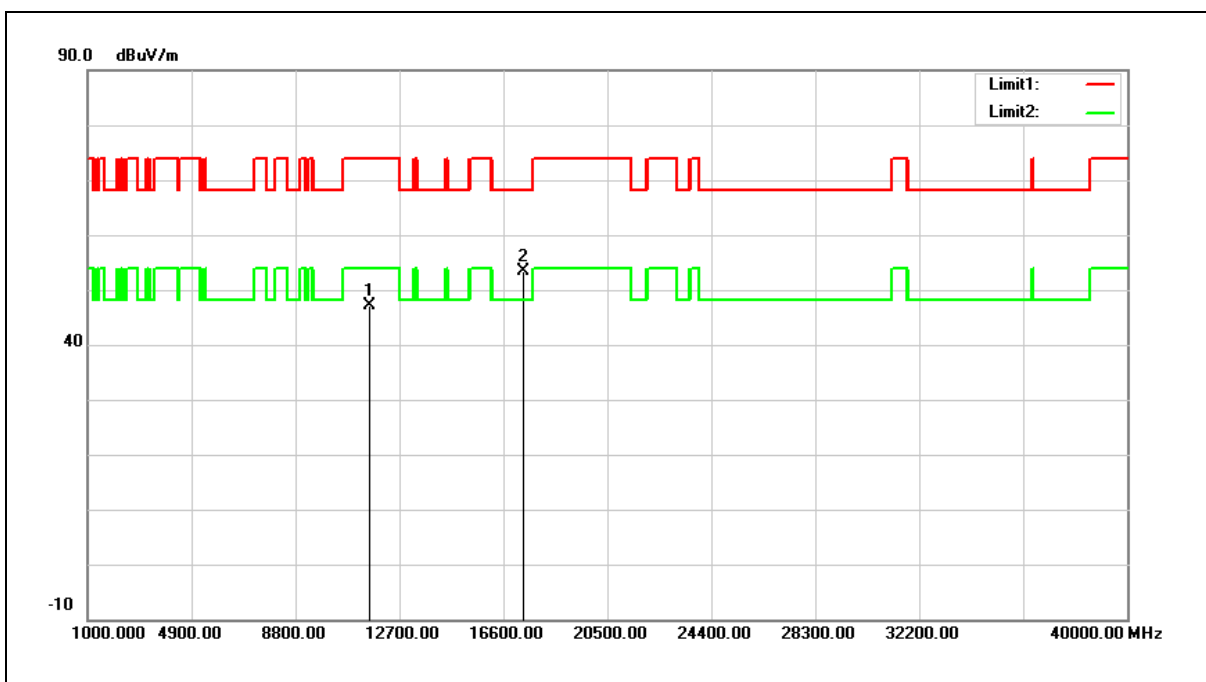


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	34.51	12.59	47.10	74.00	-26.90	peak
2	17355.000	33.95	19.32	53.27	68.20	-14.93	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

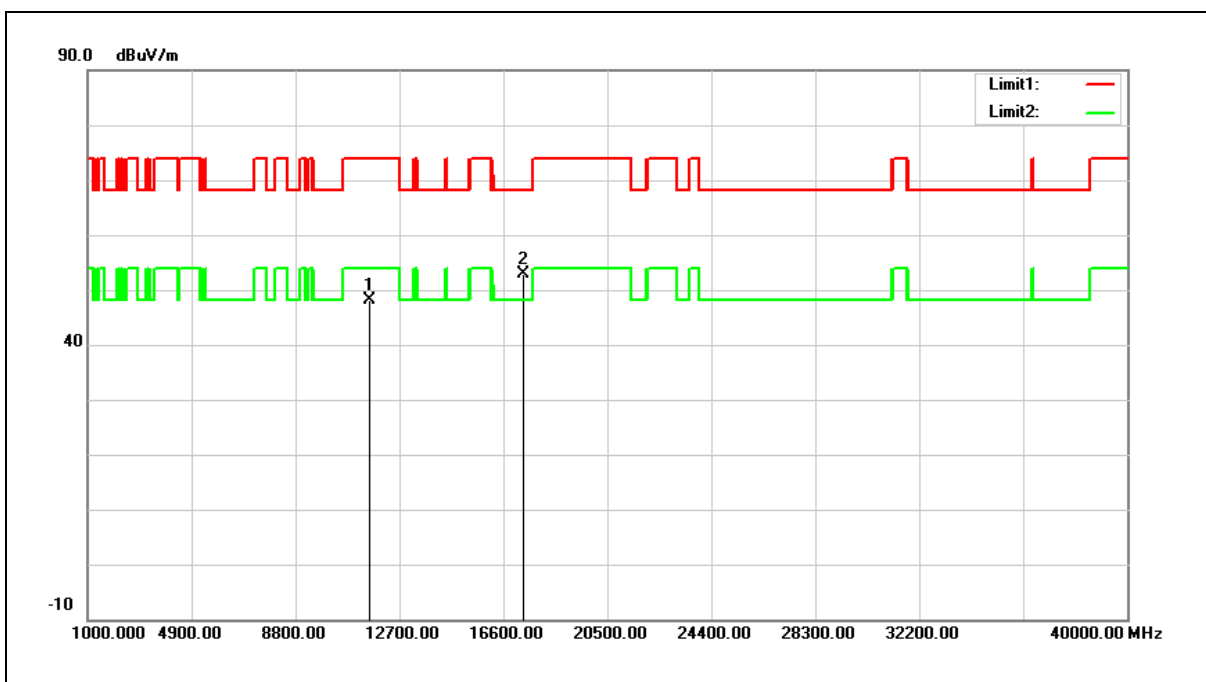


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.60	12.59	48.19	74.00	-25.81	peak
2	17355.000	33.54	19.32	52.86	68.20	-15.34	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

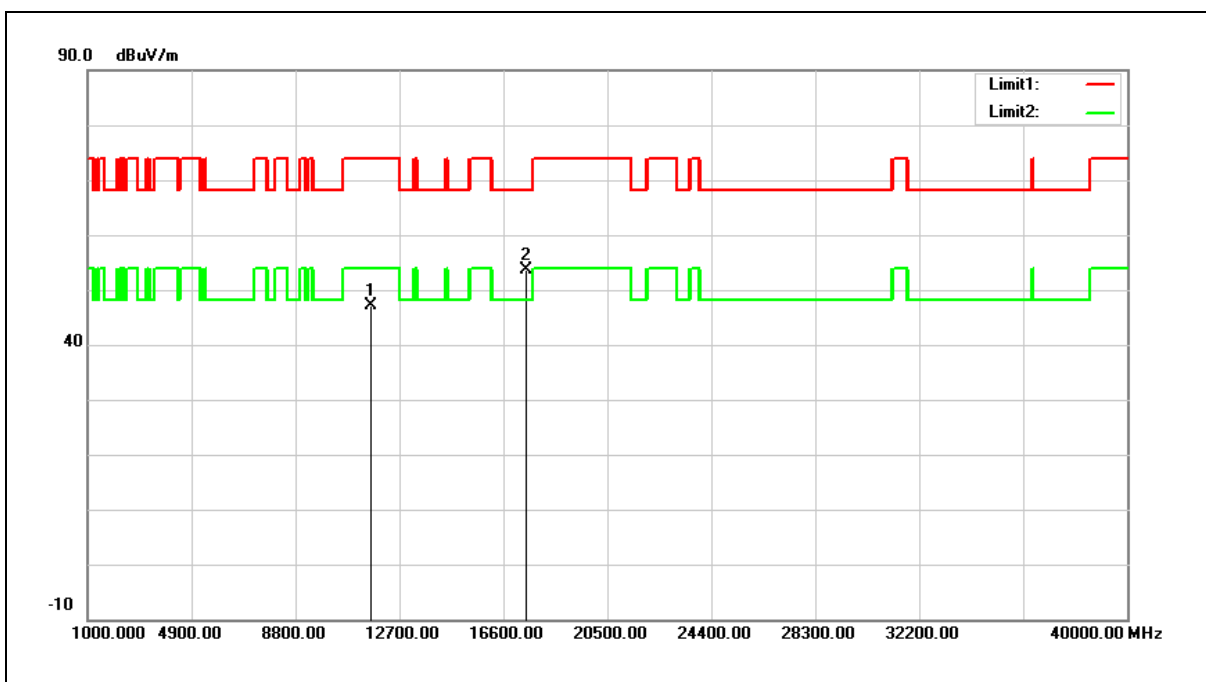


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.54	12.48	47.02	74.00	-26.98	peak
2	17475.000	33.61	20.13	53.74	68.20	-14.46	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

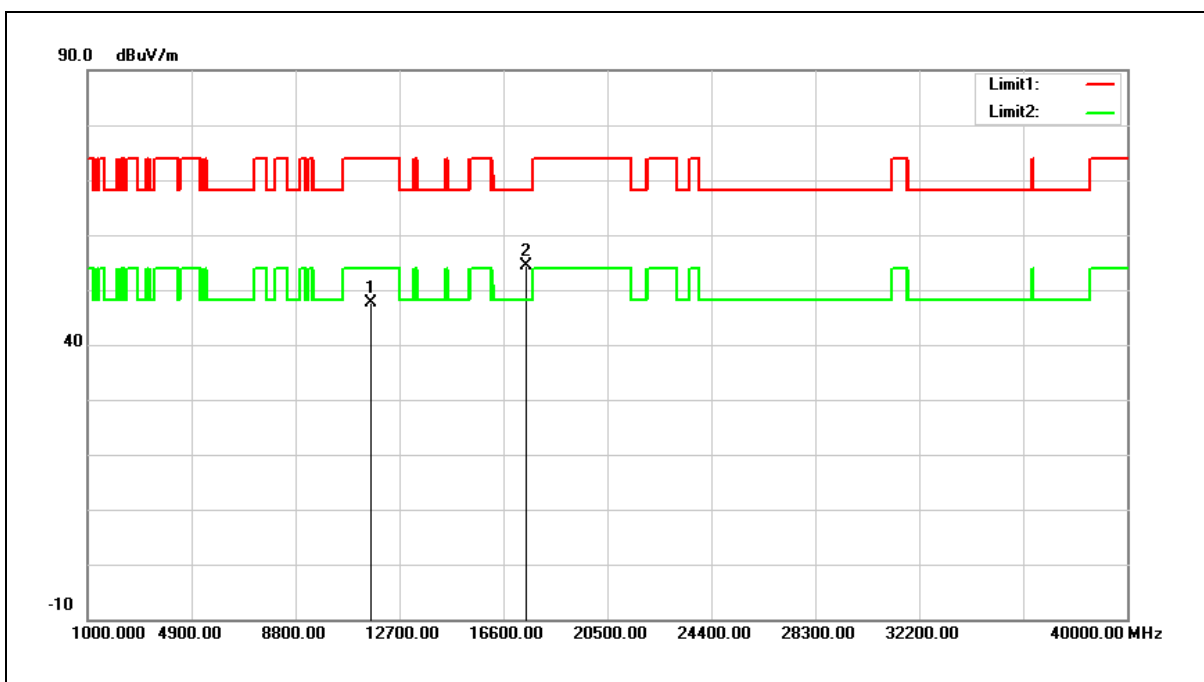


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.16	12.48	47.64	74.00	-26.36	peak
2	17475.000	34.25	20.13	54.38	68.20	-13.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

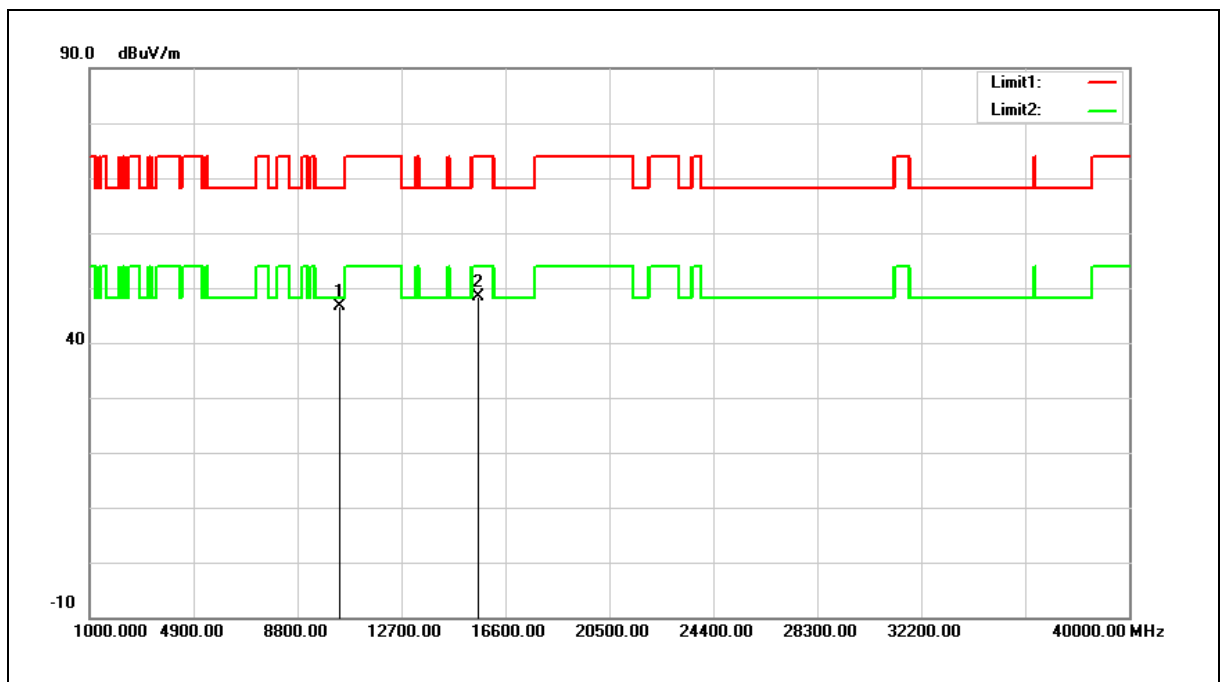


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	34.84	11.75	46.59	68.20	-21.61	peak
2	15570.000	33.92	14.45	48.37	74.00	-25.63	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

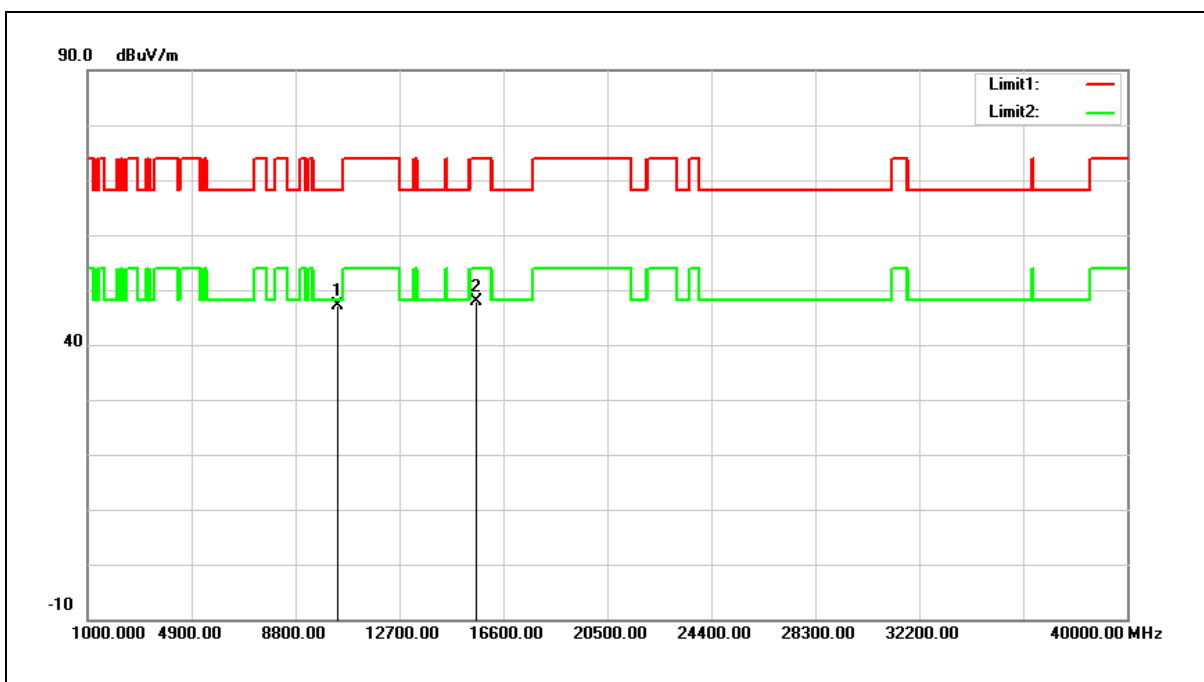


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	35.27	11.75	47.02	68.20	-21.18	peak
2	15570.000	33.53	14.45	47.98	74.00	-26.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

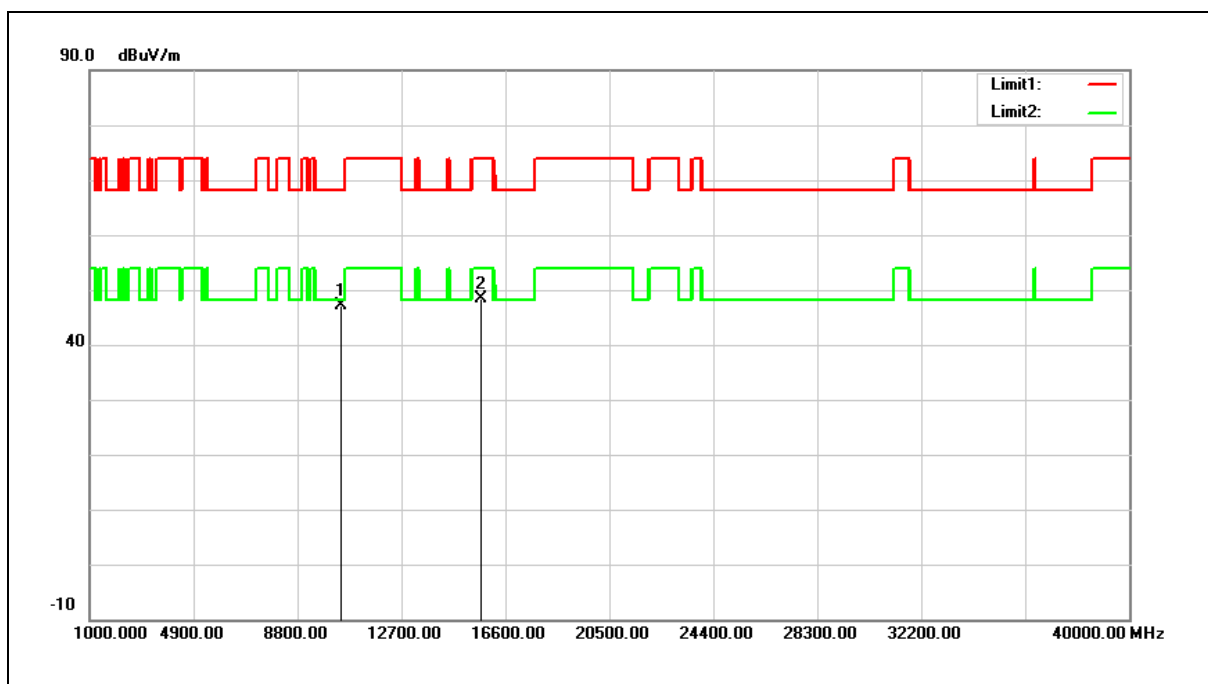


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	35.23	11.95	47.18	68.20	-21.02	peak
2	15690.000	34.07	14.19	48.26	74.00	-25.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

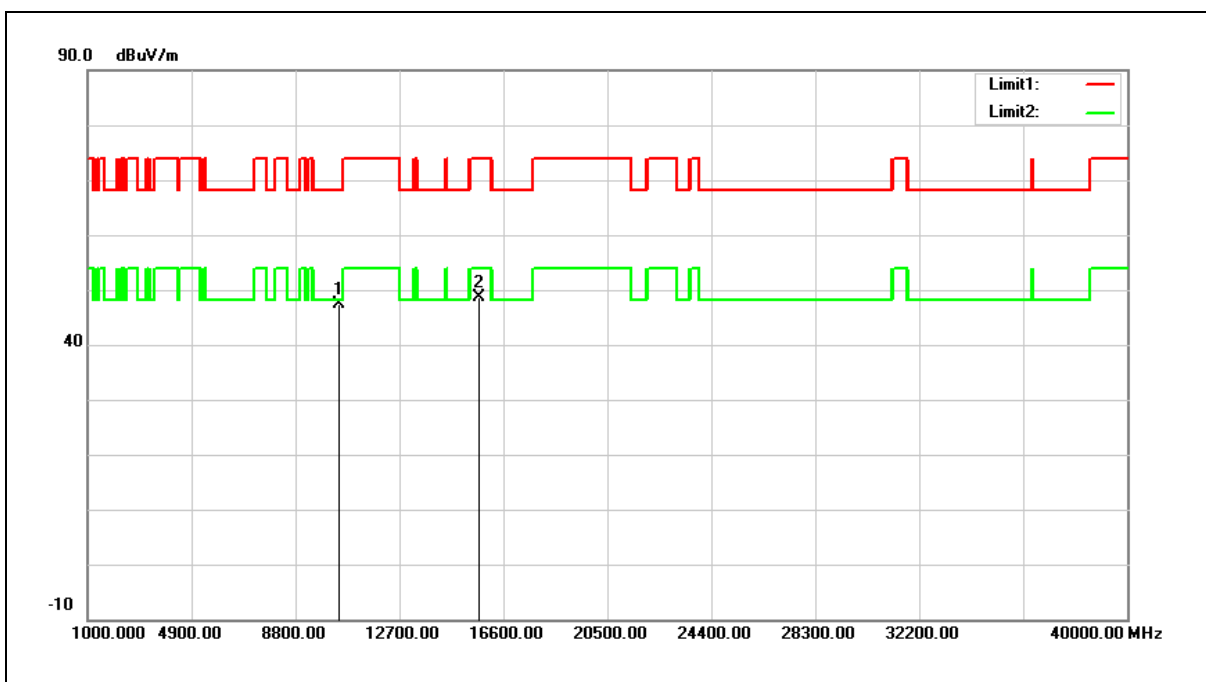


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	35.52	11.95	47.47	68.20	-20.73	peak
2	15690.000	34.32	14.19	48.51	74.00	-25.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

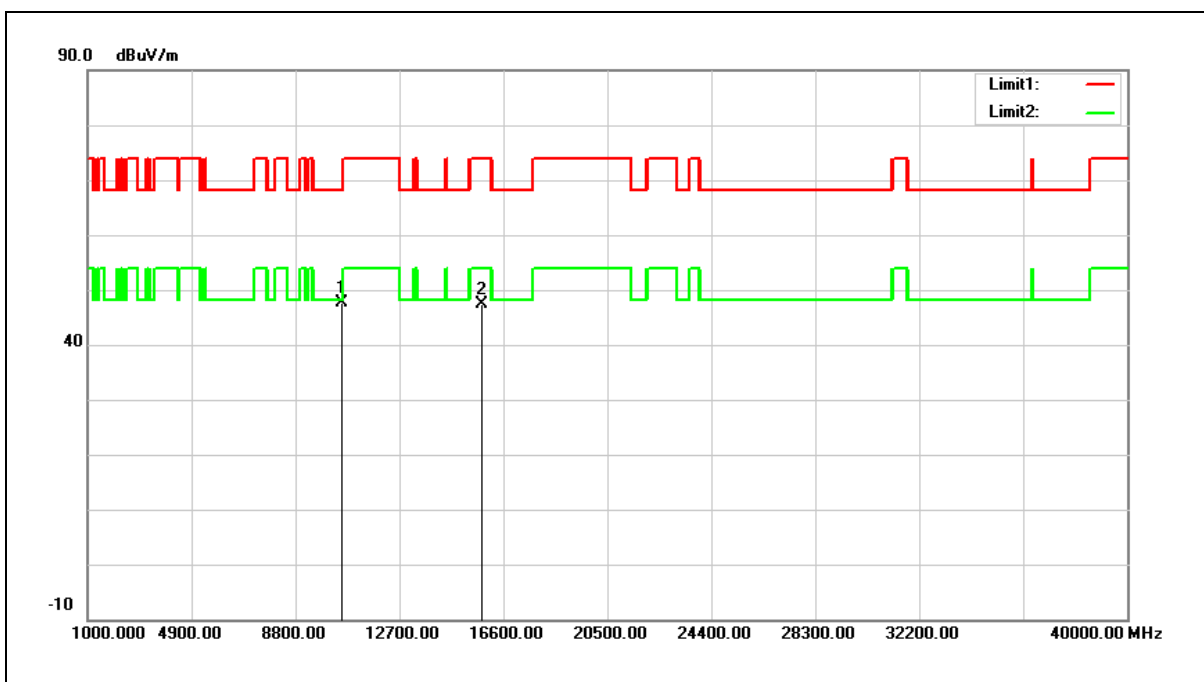


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	35.52	12.06	47.58	68.20	-20.62	peak
2	15810.000	33.51	13.96	47.47	74.00	-26.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

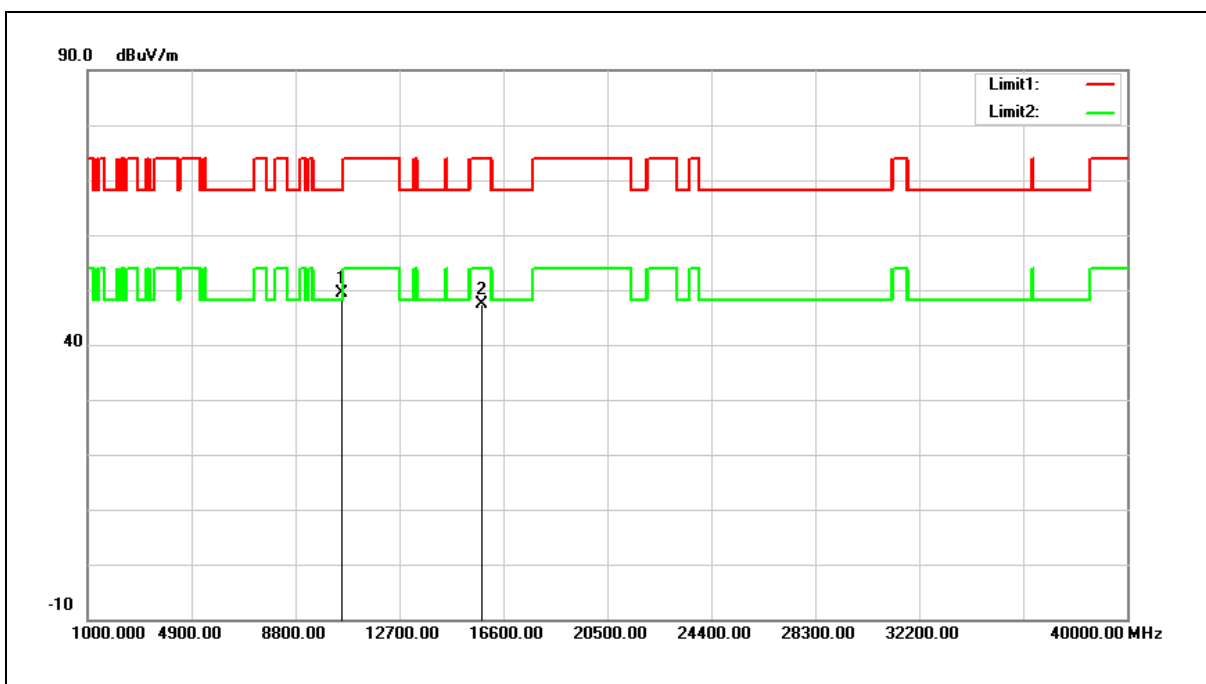


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	37.35	12.06	49.41	68.20	-18.79	peak
2	15810.000	33.37	13.96	47.33	74.00	-26.67	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

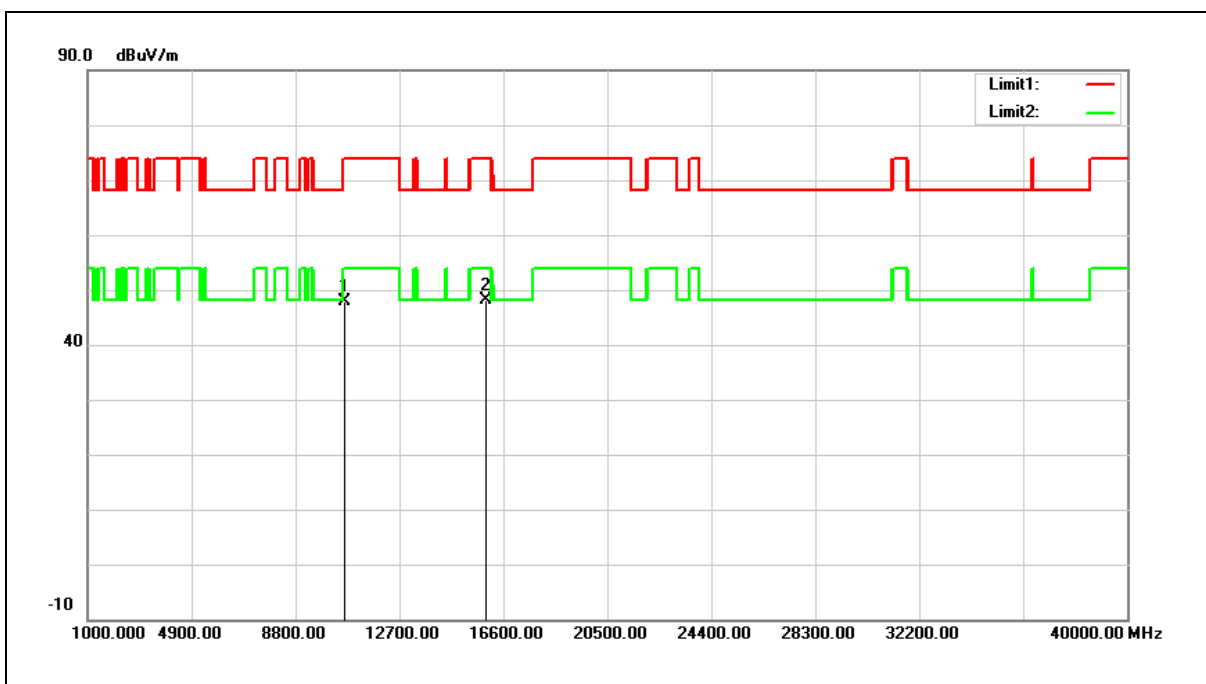


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	35.75	12.12	47.87	74.00	-26.13	peak
2	15930.000	34.36	13.70	48.06	74.00	-25.94	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

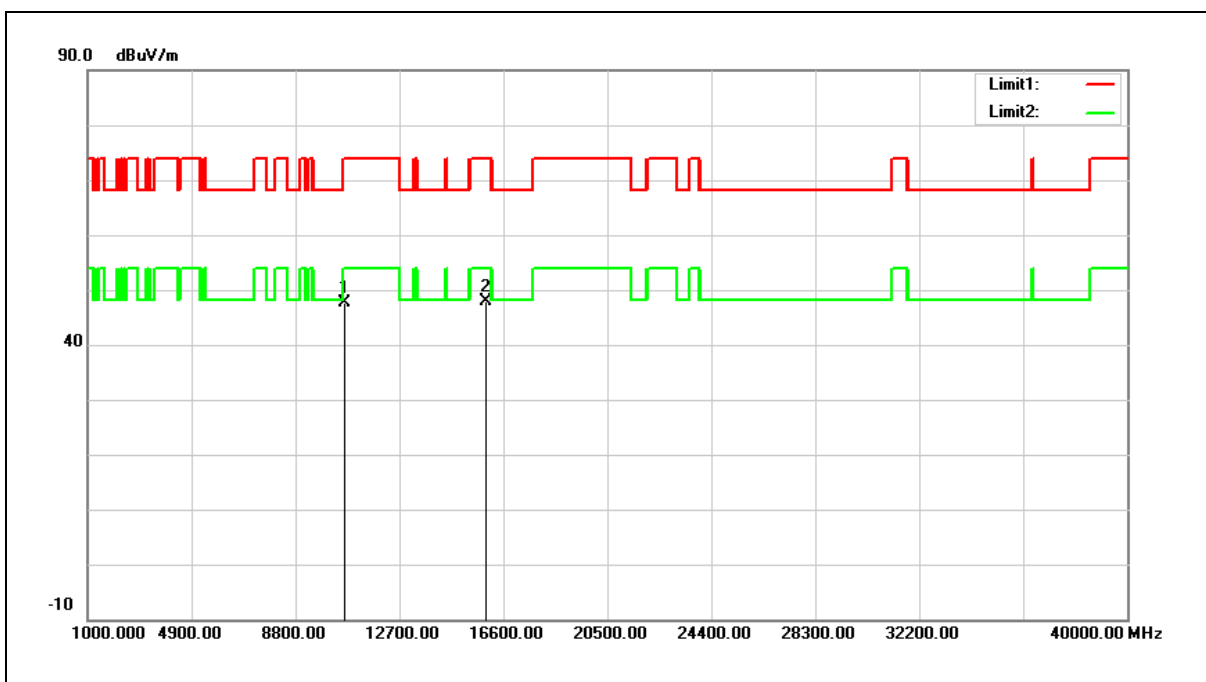


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	35.42	12.12	47.54	74.00	-26.46	peak
2	15930.000	34.17	13.70	47.87	74.00	-26.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

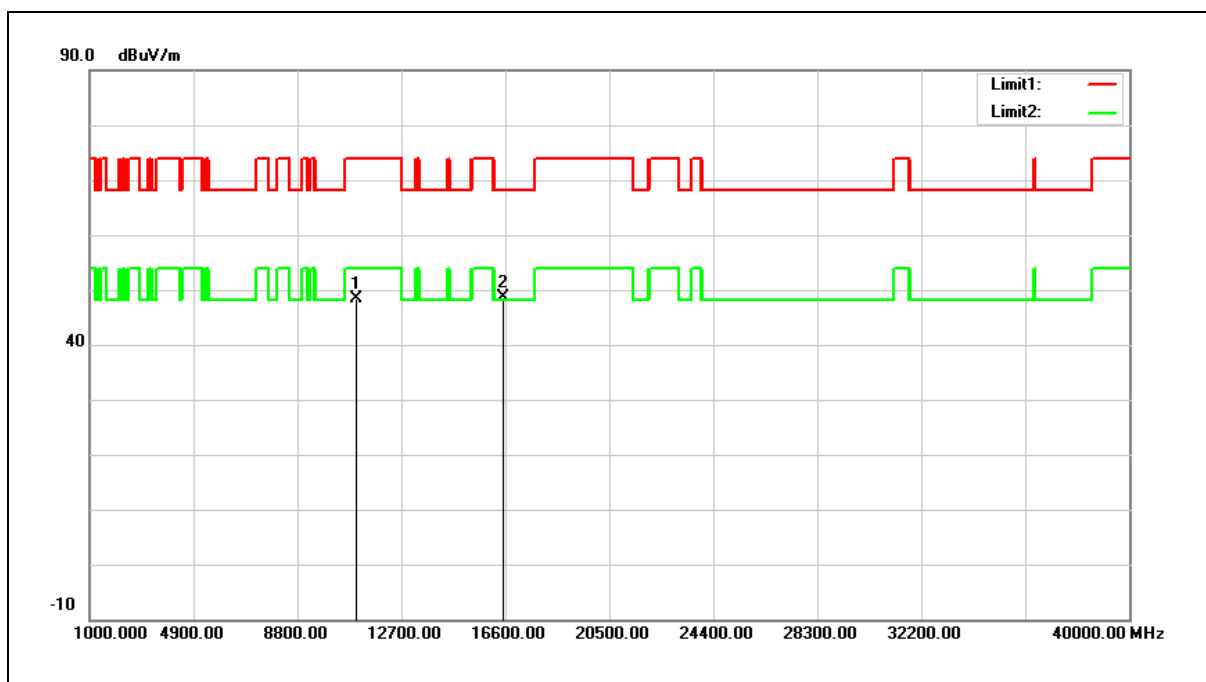


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	36.10	12.40	48.50	74.00	-25.50	peak
2	16530.000	34.12	14.41	48.53	68.20	-19.67	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

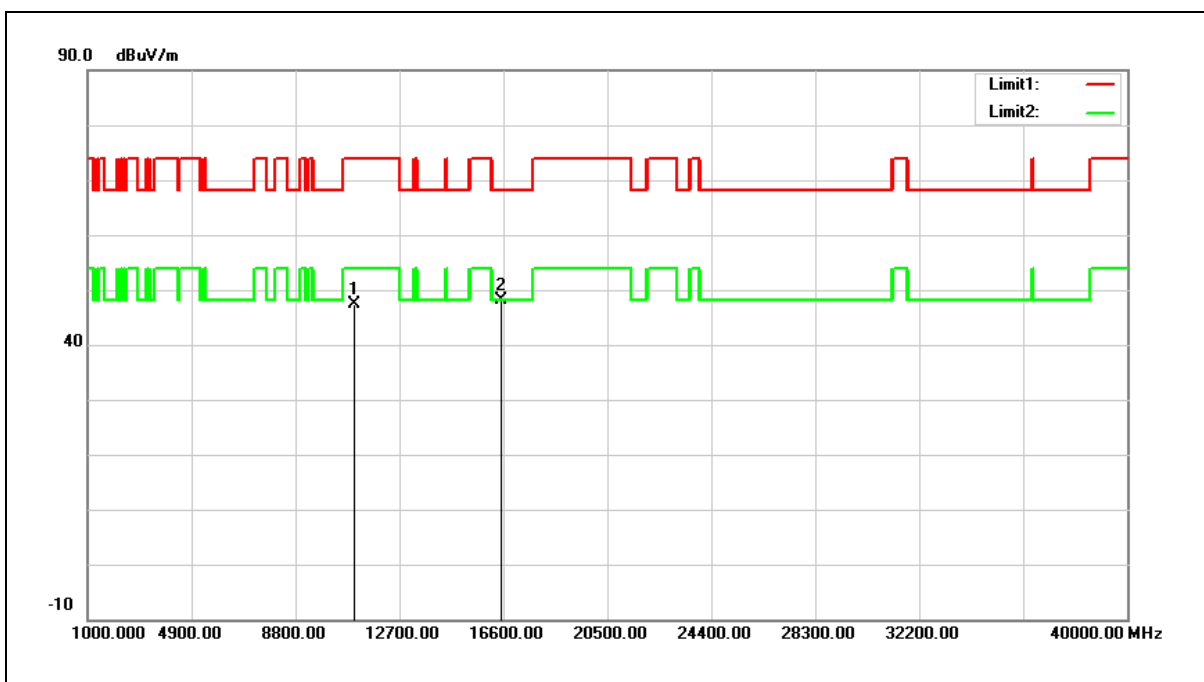


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	35.05	12.40	47.45	74.00	-26.55	peak
2	16530.000	33.74	14.41	48.15	68.20	-20.05	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

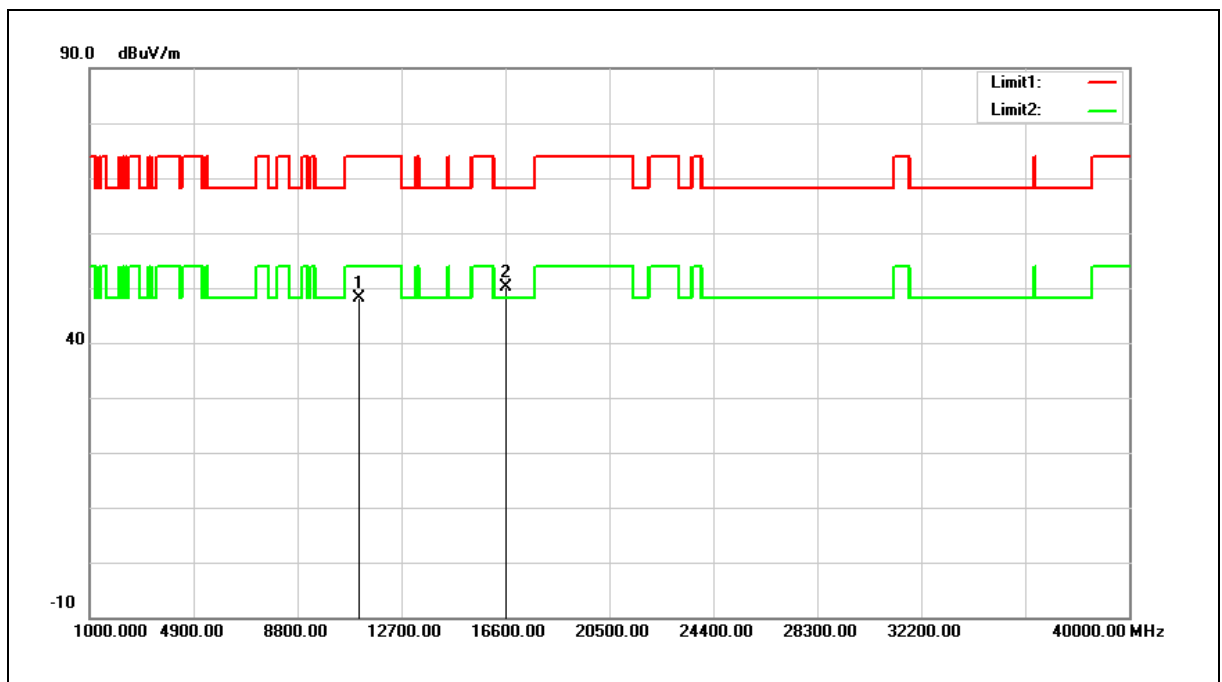


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	35.68	12.45	48.13	74.00	-25.87	peak
2	16650.000	35.00	15.06	50.06	68.20	-18.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

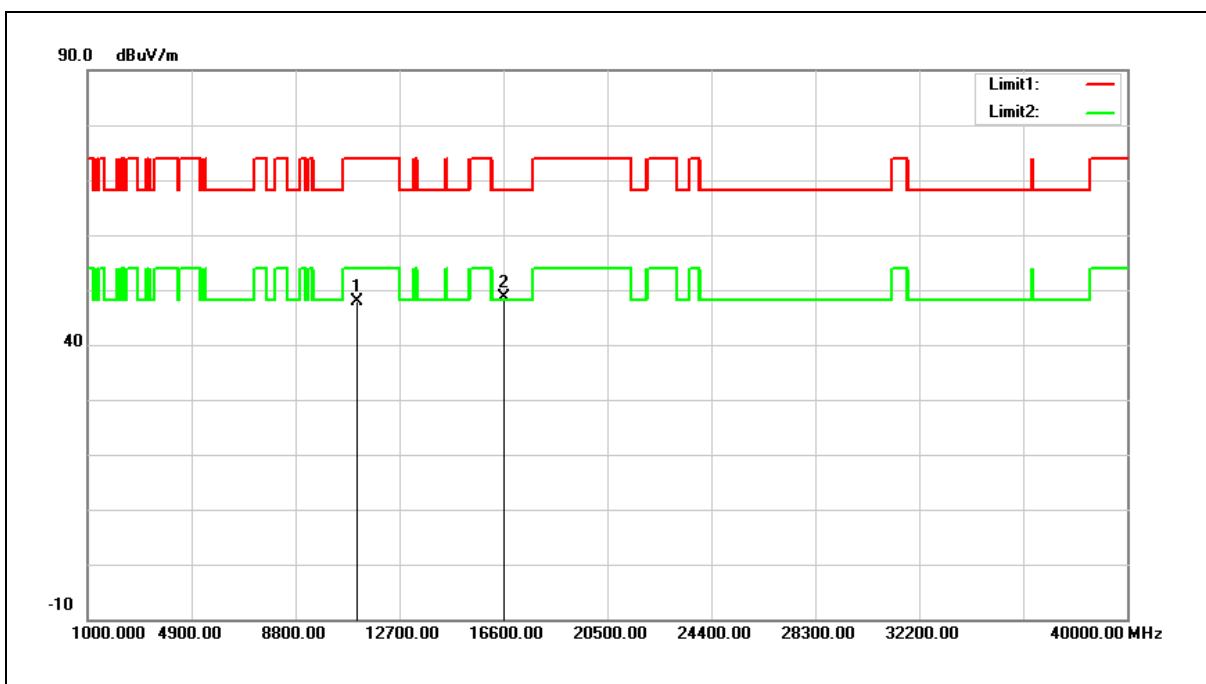


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	35.41	12.45	47.86	74.00	-26.14	peak
2	16650.000	33.61	15.06	48.67	68.20	-19.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

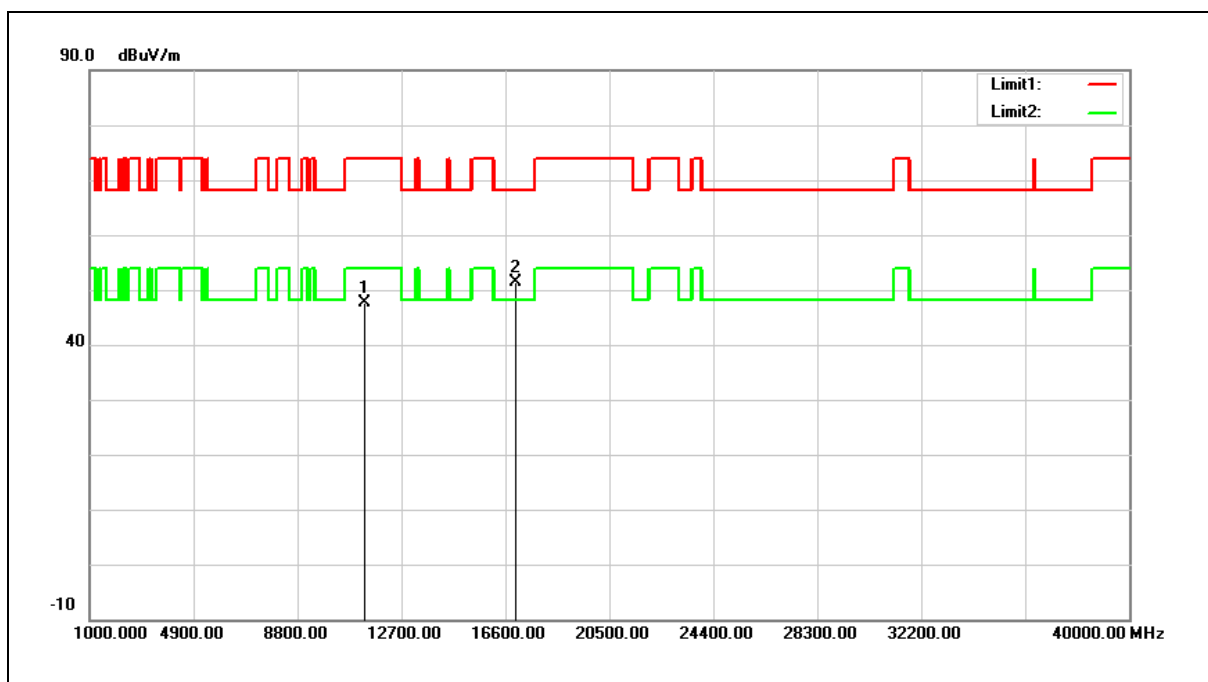


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	34.98	12.59	47.57	74.00	-26.43	peak
2	17010.000	34.40	17.02	51.42	68.20	-16.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

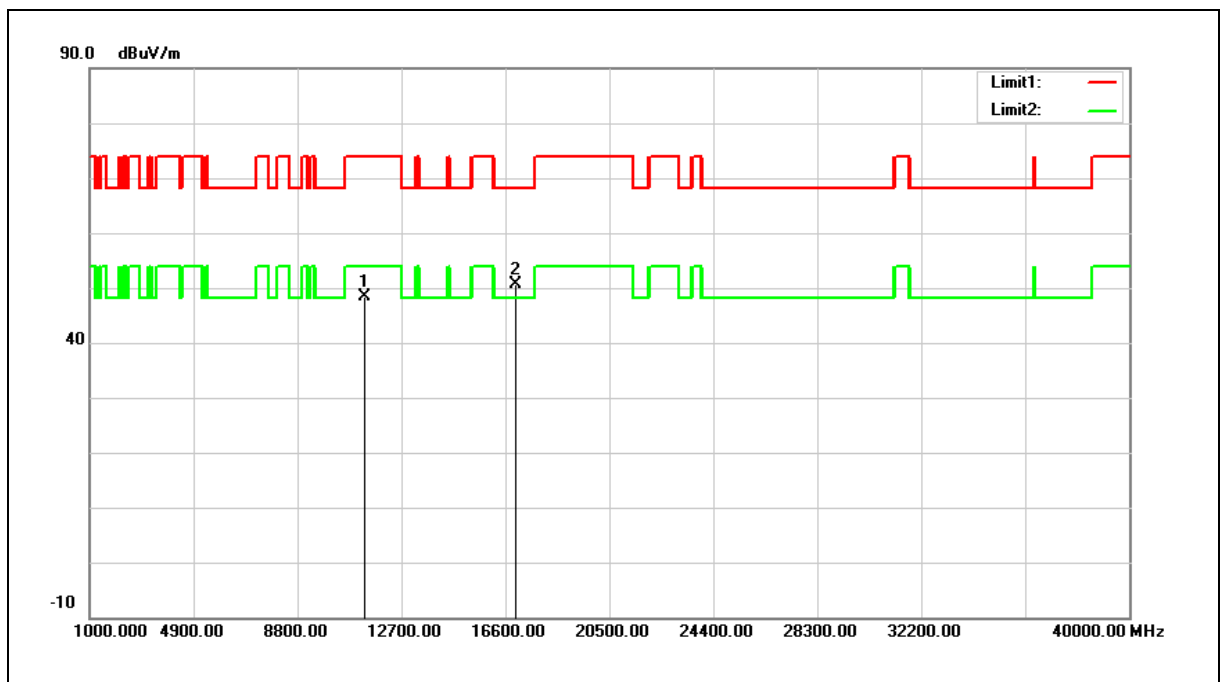


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	35.69	12.59	48.28	74.00	-25.72	peak
2	17010.000	33.50	17.02	50.52	68.20	-17.68	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

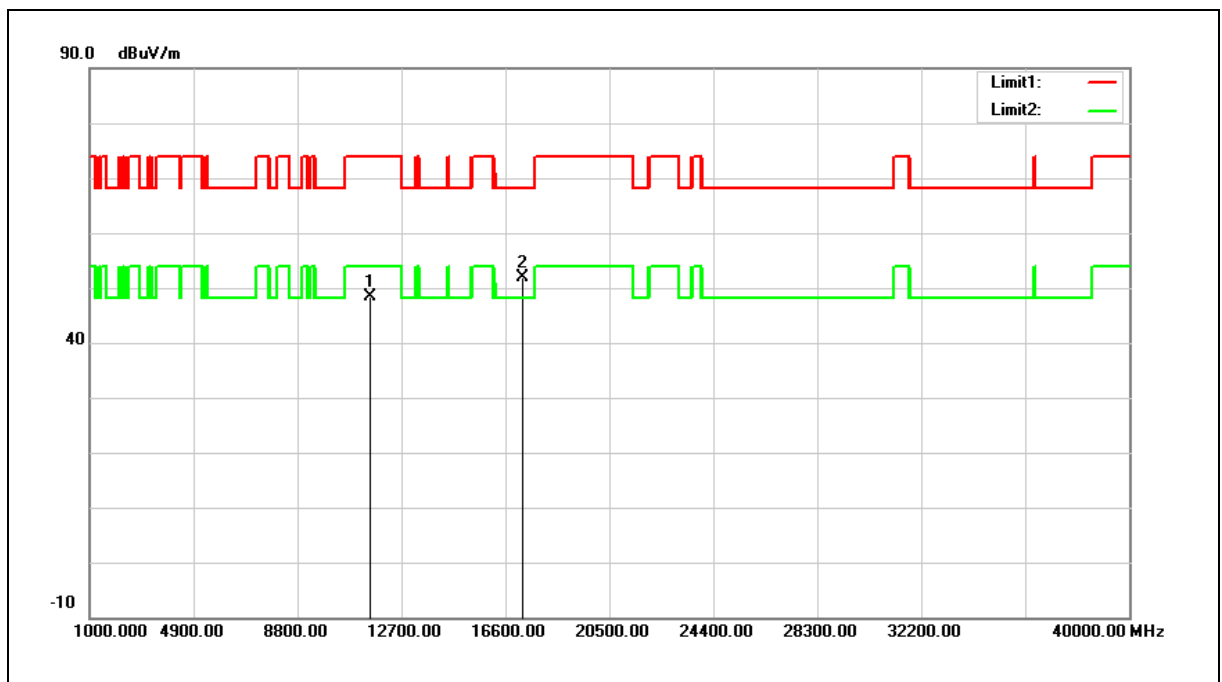


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	35.75	12.68	48.43	74.00	-25.57	peak
2	17265.000	33.14	18.72	51.86	68.20	-16.34	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

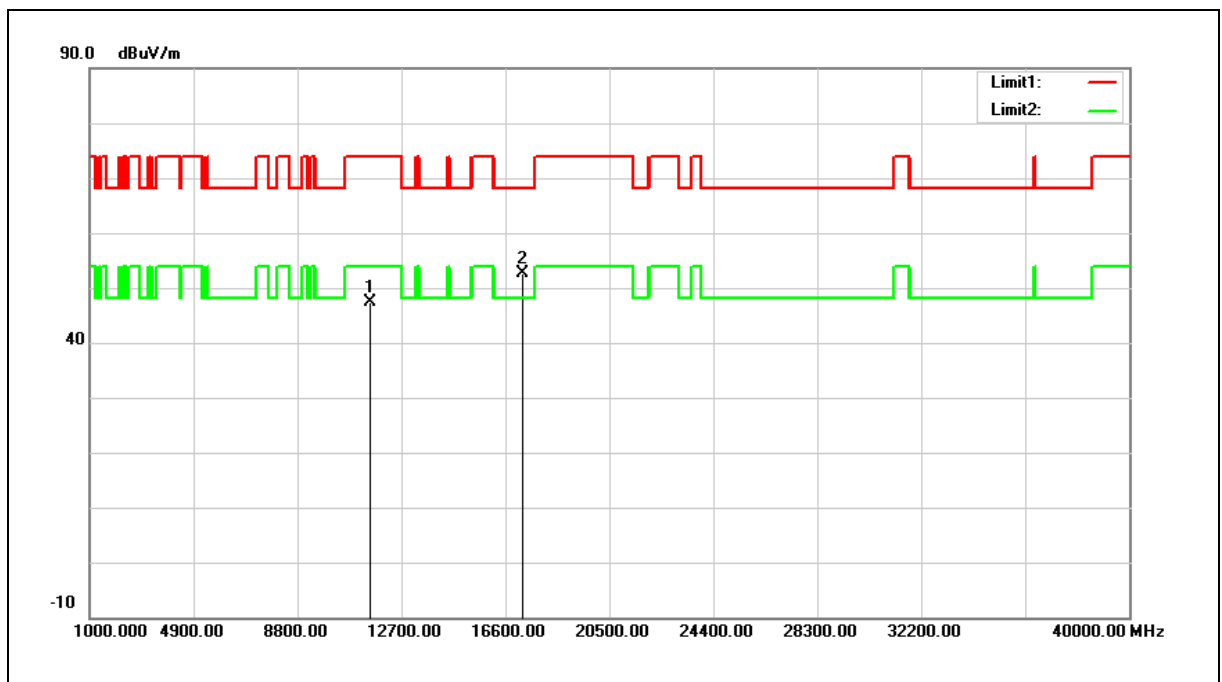


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	34.77	12.68	47.45	74.00	-26.55	peak
2	17265.000	33.95	18.72	52.67	68.20	-15.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

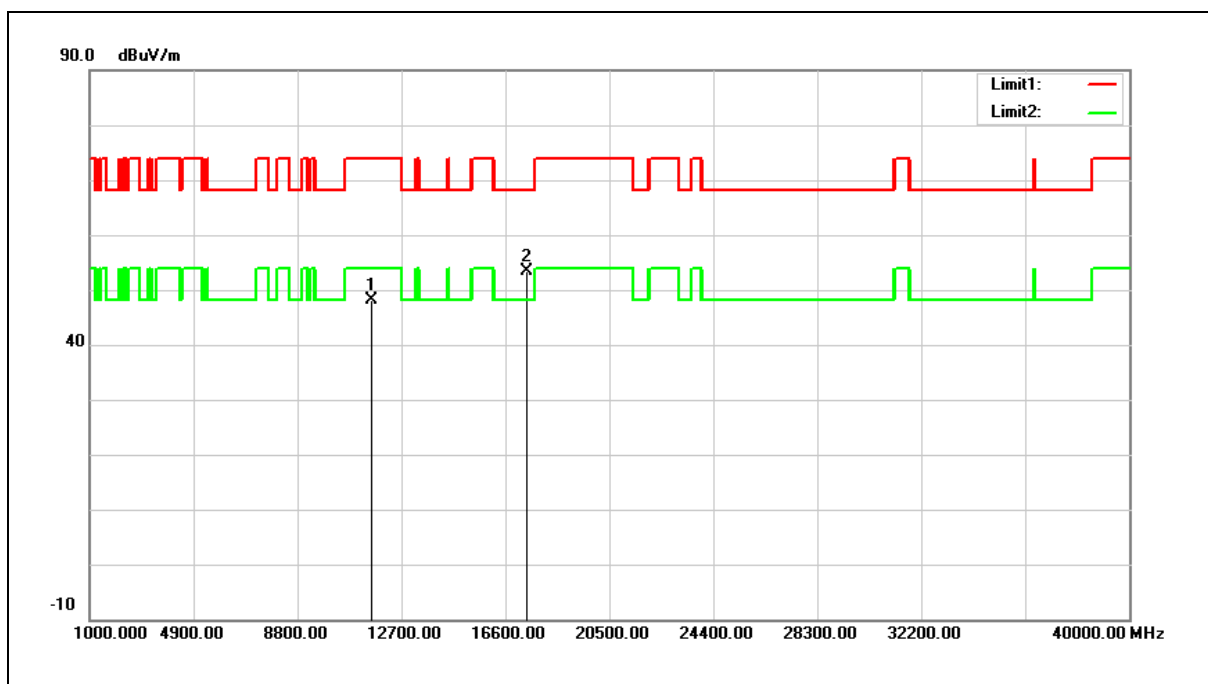


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	35.56	12.56	48.12	74.00	-25.88	peak
2	17385.000	33.80	19.52	53.32	68.20	-14.88	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

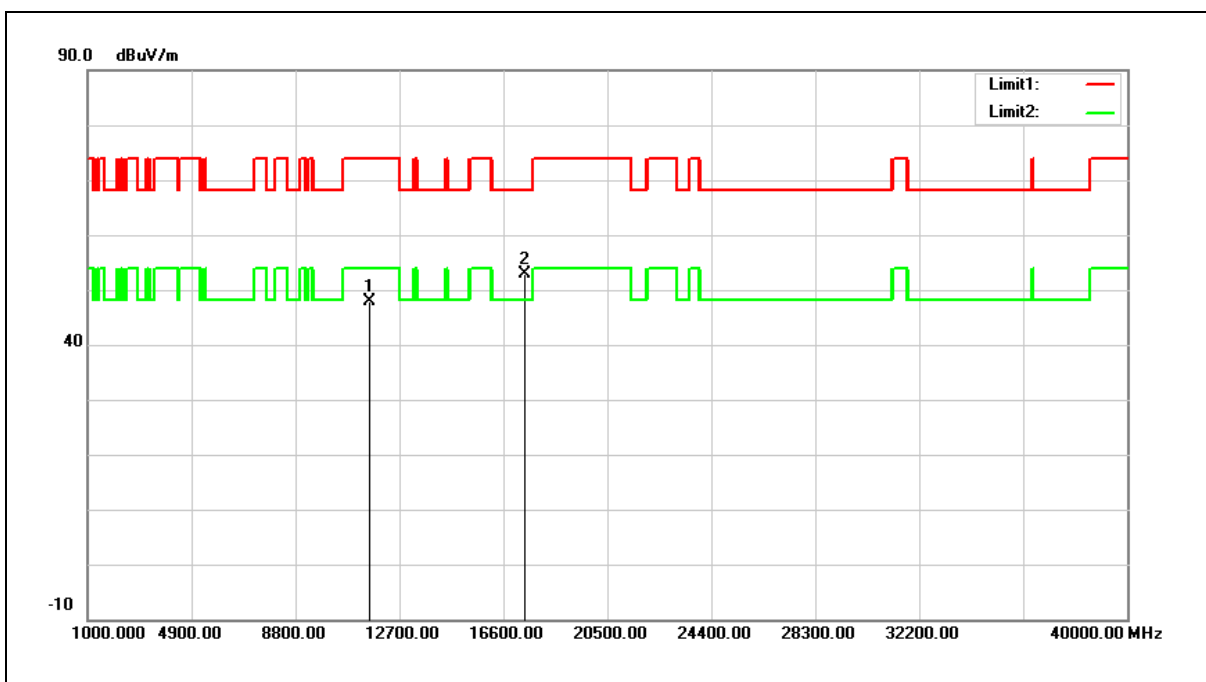


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	35.39	12.56	47.95	74.00	-26.05	peak
2	17385.000	33.24	19.52	52.76	68.20	-15.44	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

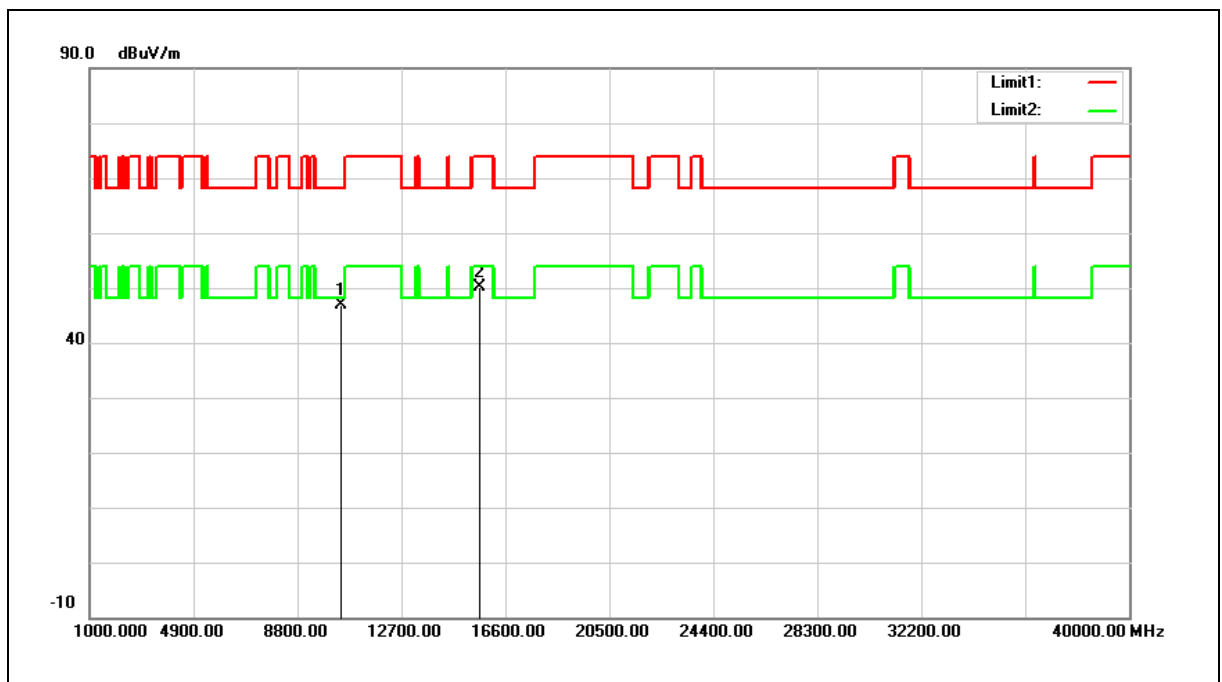


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	35.05	11.85	46.90	68.20	-21.30	peak
2	15630.000	35.73	14.33	50.06	74.00	-23.94	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

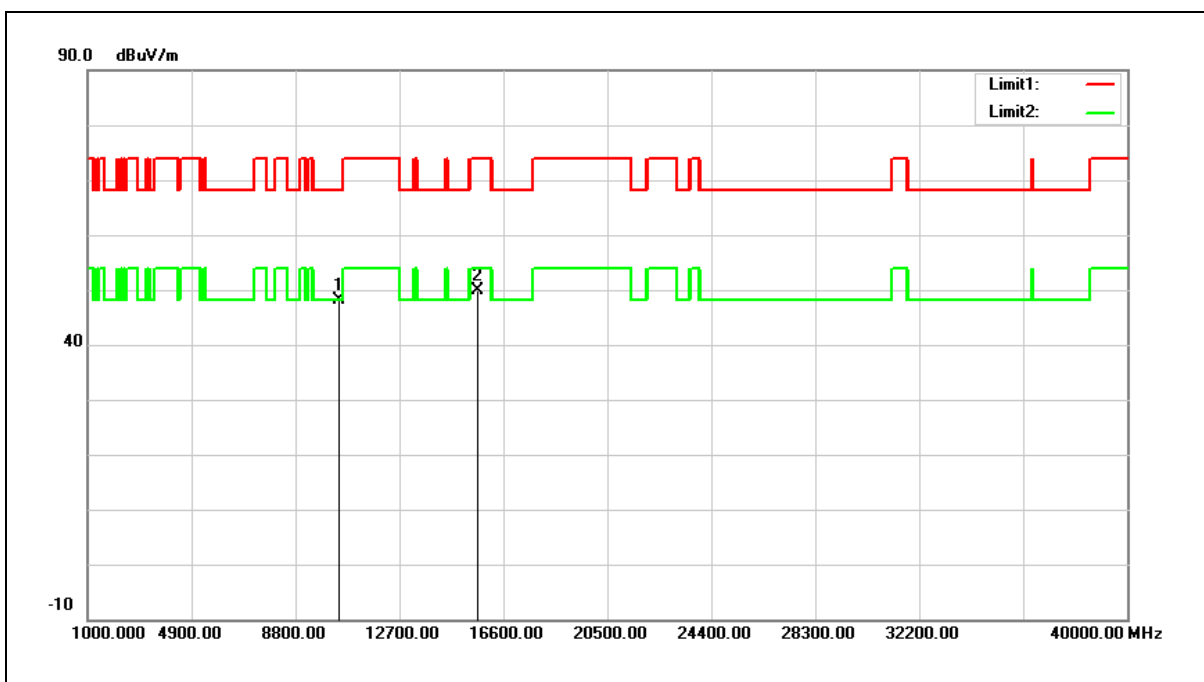


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	36.17	11.85	48.02	68.20	-20.18	peak
2	15630.000	35.52	14.33	49.85	74.00	-24.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

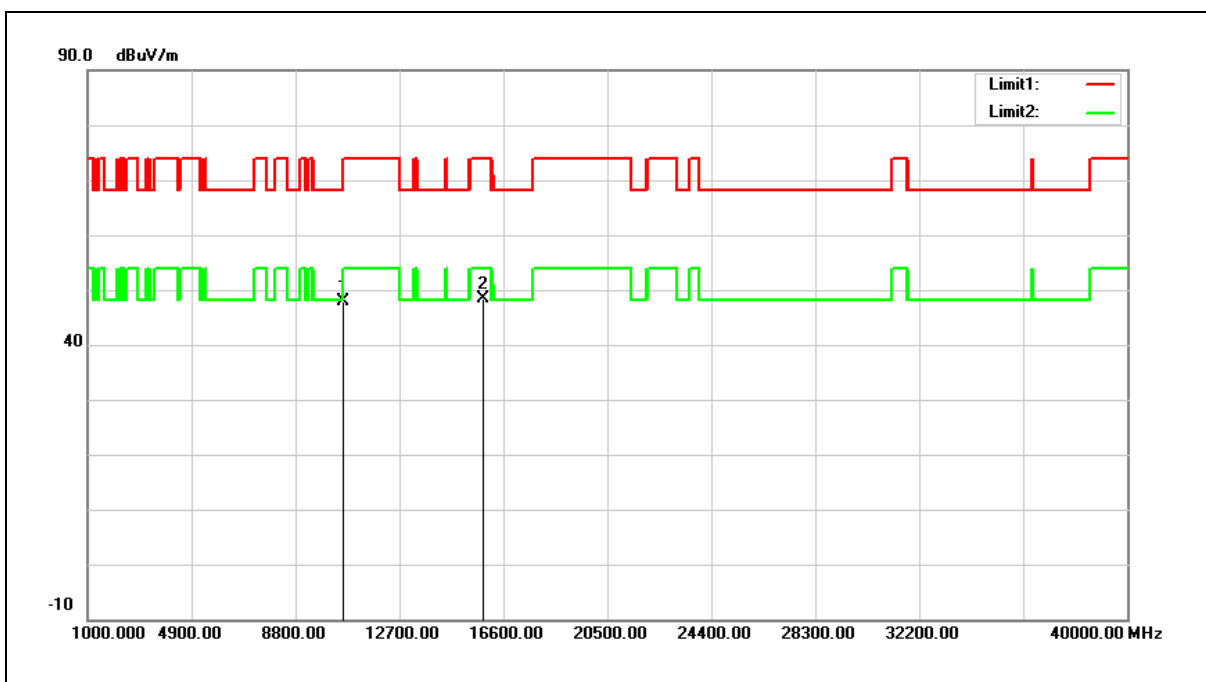


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	35.88	12.10	47.98	68.20	-20.22	peak
2	15870.000	34.54	13.82	48.36	74.00	-25.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

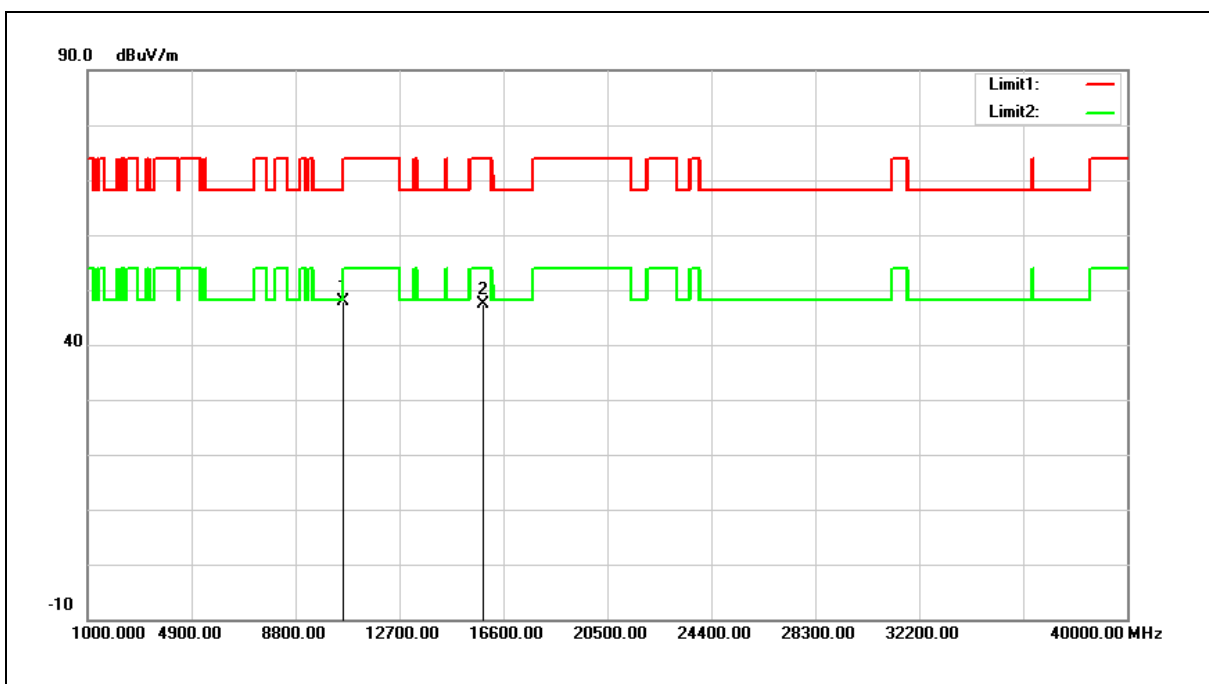


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	35.75	12.10	47.85	68.20	-20.35	peak
2	15870.000	33.57	13.82	47.39	74.00	-26.61	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

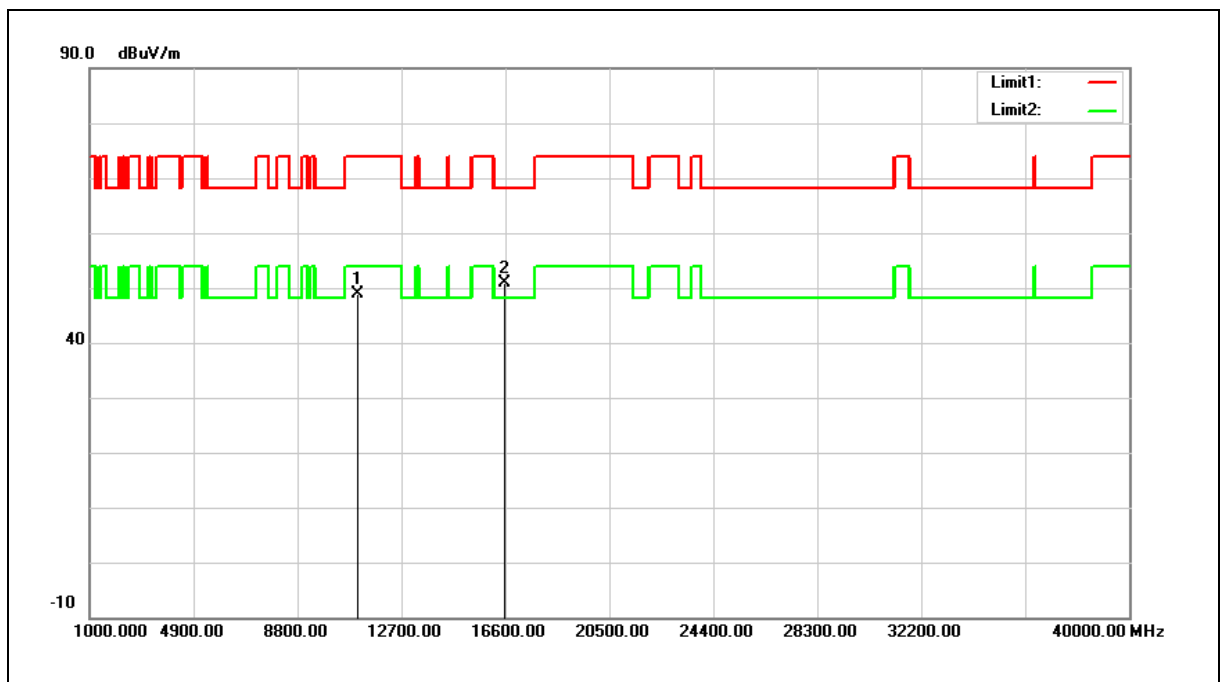


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	36.52	12.43	48.95	74.00	-25.05	peak
2	16590.000	36.09	14.73	50.82	68.20	-17.38	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

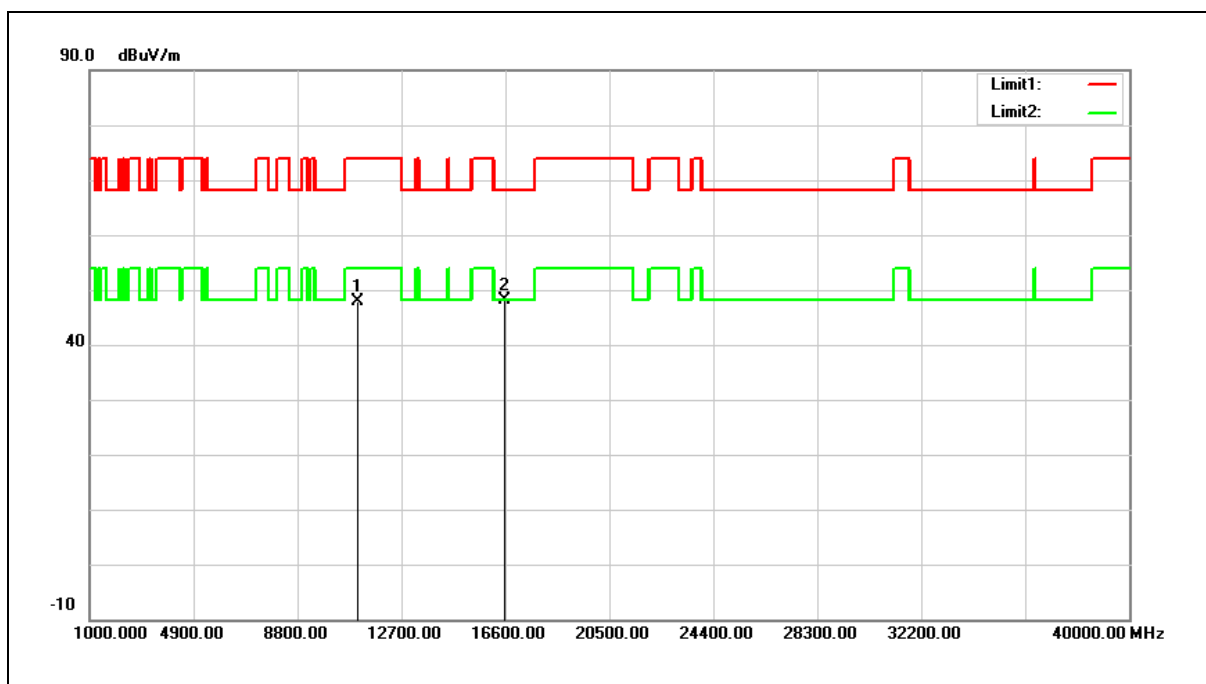


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	35.51	12.43	47.94	74.00	-26.06	peak
2	16590.000	33.32	14.73	48.05	68.20	-20.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

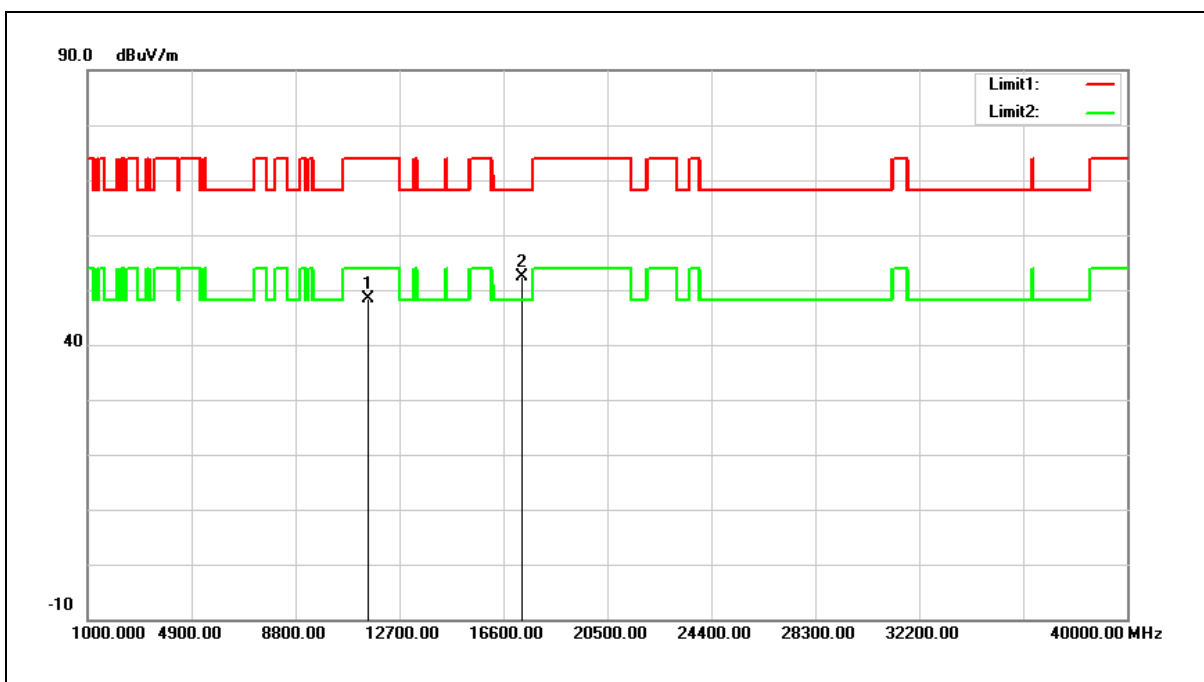


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	35.88	12.62	48.50	74.00	-25.50	peak
2	17325.000	33.19	19.12	52.31	68.20	-15.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

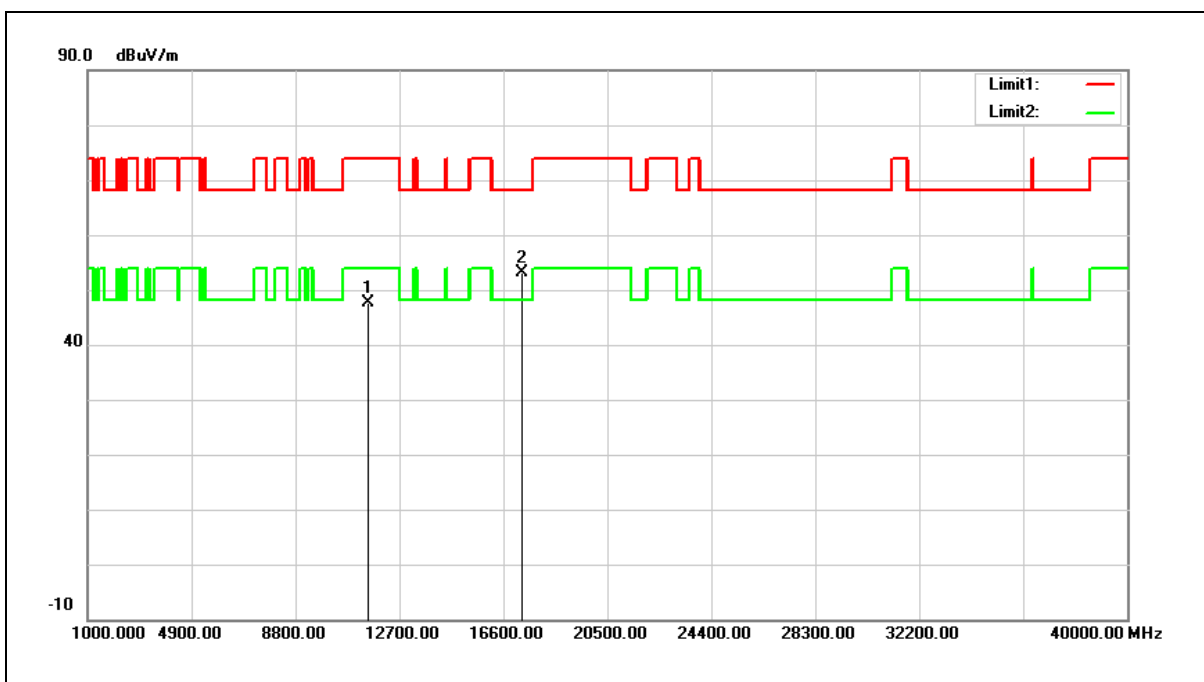


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	35.13	12.62	47.75	74.00	-26.25	peak
2	17325.000	33.91	19.12	53.03	68.20	-15.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5250 MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

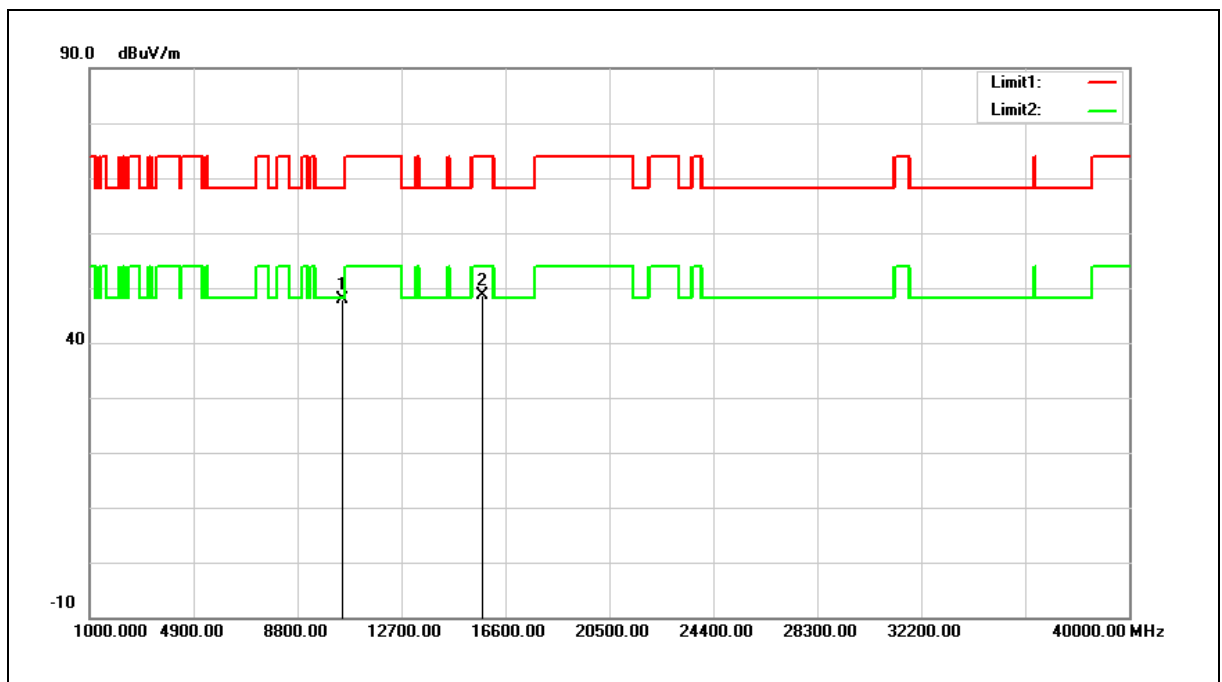


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10500.000	35.87	12.05	47.92	68.20	-20.28	peak
2	15750.000	34.67	14.08	48.75	74.00	-25.25	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5250 MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		

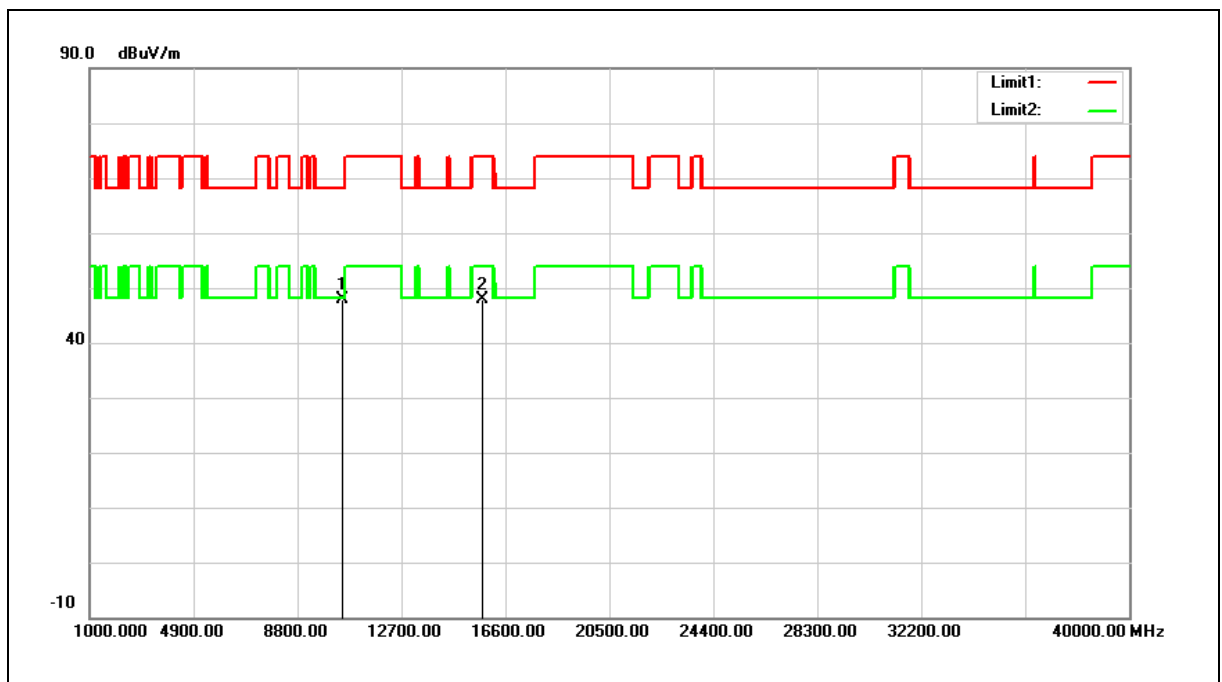


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10500.000	35.72	12.05	47.77	68.20	-20.43	peak
2	15750.000	33.79	14.08	47.87	74.00	-26.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting		
	(WLAN 5 GHz + Bluetooth)		
Ant.Polar.:	Horizontal		

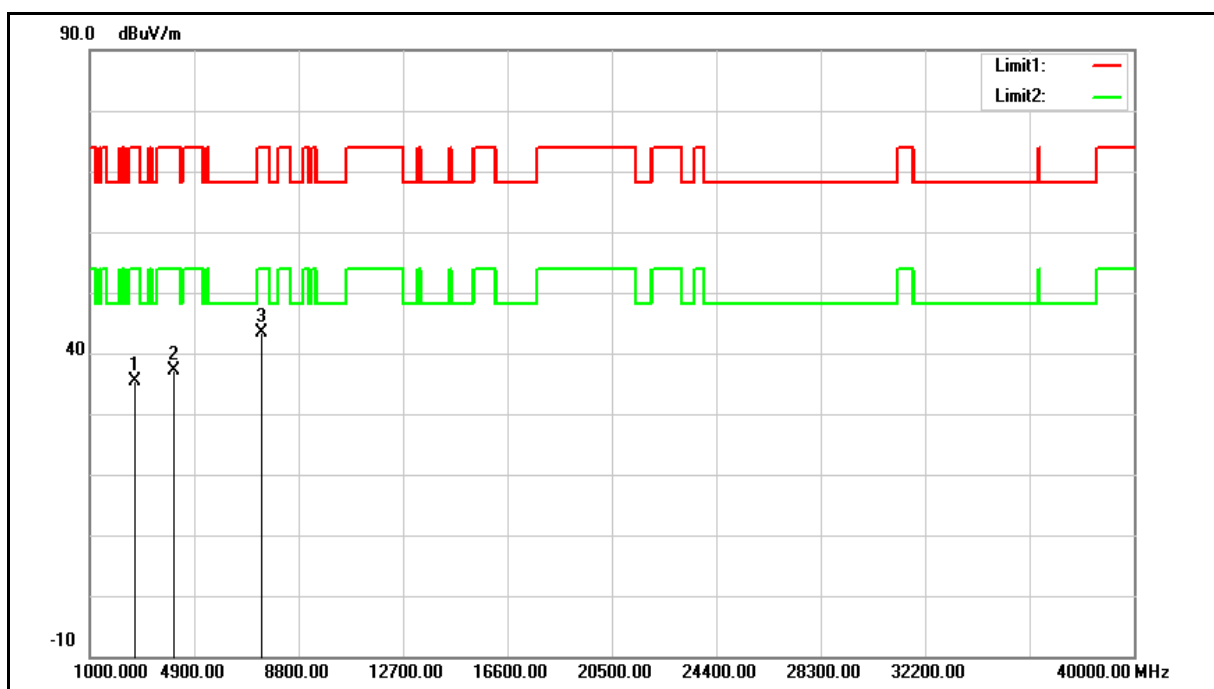


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2666.000	41.92	-6.60	35.32	74.00	-38.68	peak
2	4111.000	40.41	-3.19	37.22	74.00	-36.78	peak
3	7409.000	36.83	6.46	43.29	74.00	-30.71	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting		
	(WLAN 5 GHz + Bluetooth)		
Ant.Polar.:	Vertical		

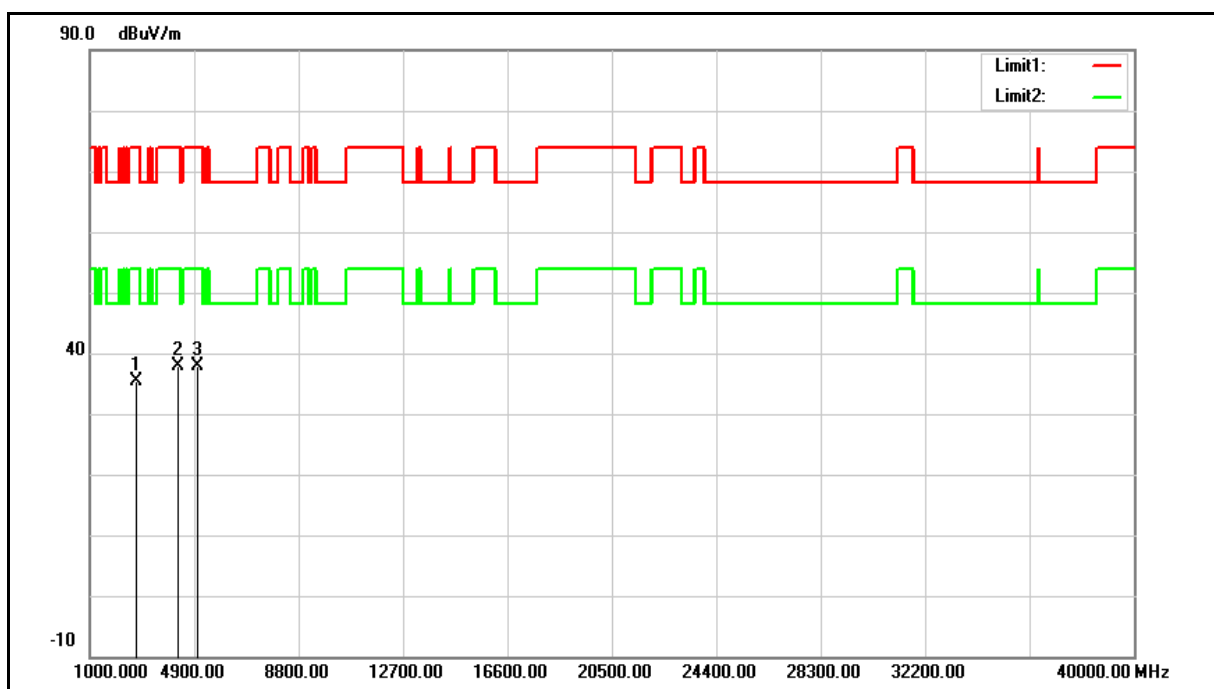


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2751.000	41.65	-6.25	35.40	74.00	-38.60	peak
2	4315.000	40.44	-2.64	37.80	74.00	-36.20	peak
3	4995.000	38.66	-0.78	37.88	74.00	-36.12	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		
Description:			

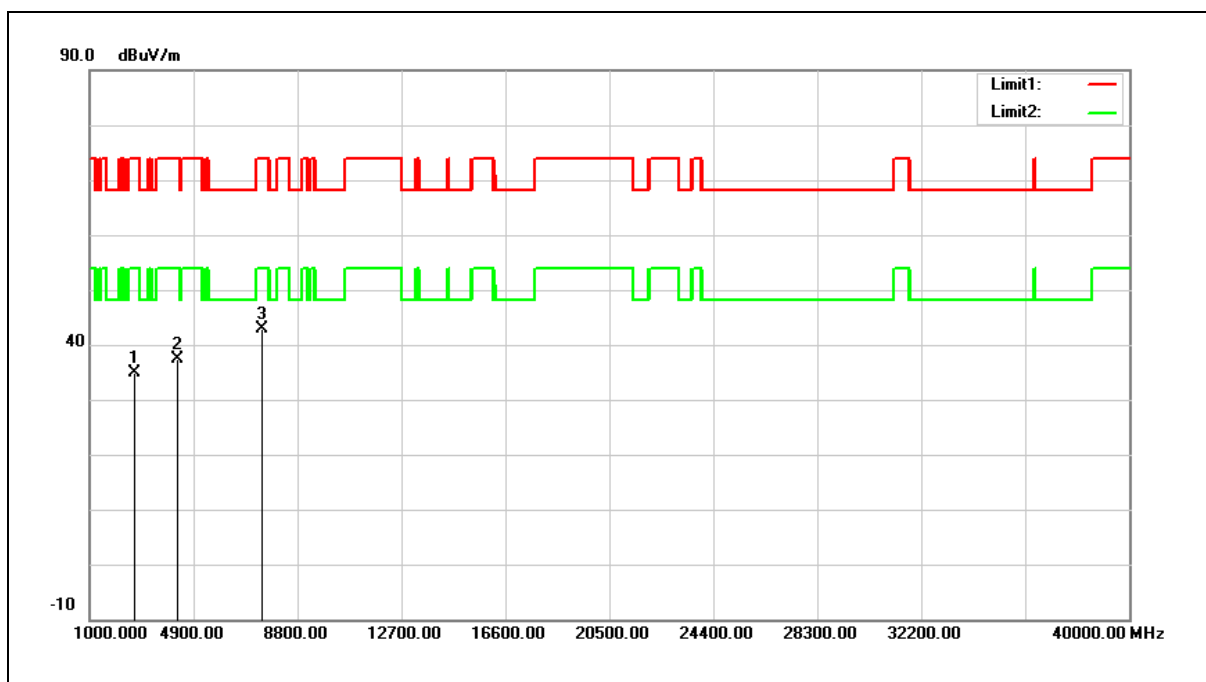


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2649.000	41.65	-6.66	34.99	74.00	-39.01	peak
2	4315.000	39.91	-2.64	37.27	74.00	-36.73	peak
3	7477.000	36.13	6.70	42.83	74.00	-31.17	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 13		
Ant.Polar.:	Vertical		
Description:			

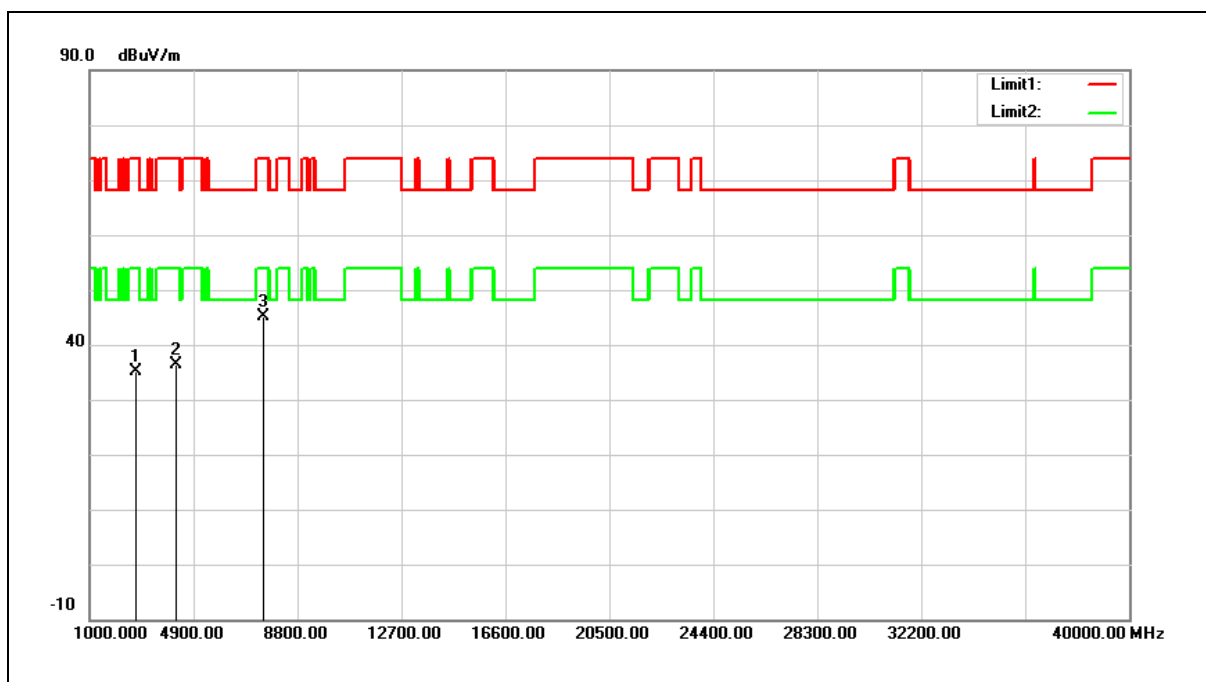

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2717.000	41.48	-6.39	35.09	74.00	-38.91	peak
2	4247.000	39.23	-2.82	36.41	74.00	-37.59	peak
3	7511.000	38.27	6.79	45.06	74.00	-28.94	peak


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

頻帶邊緣

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

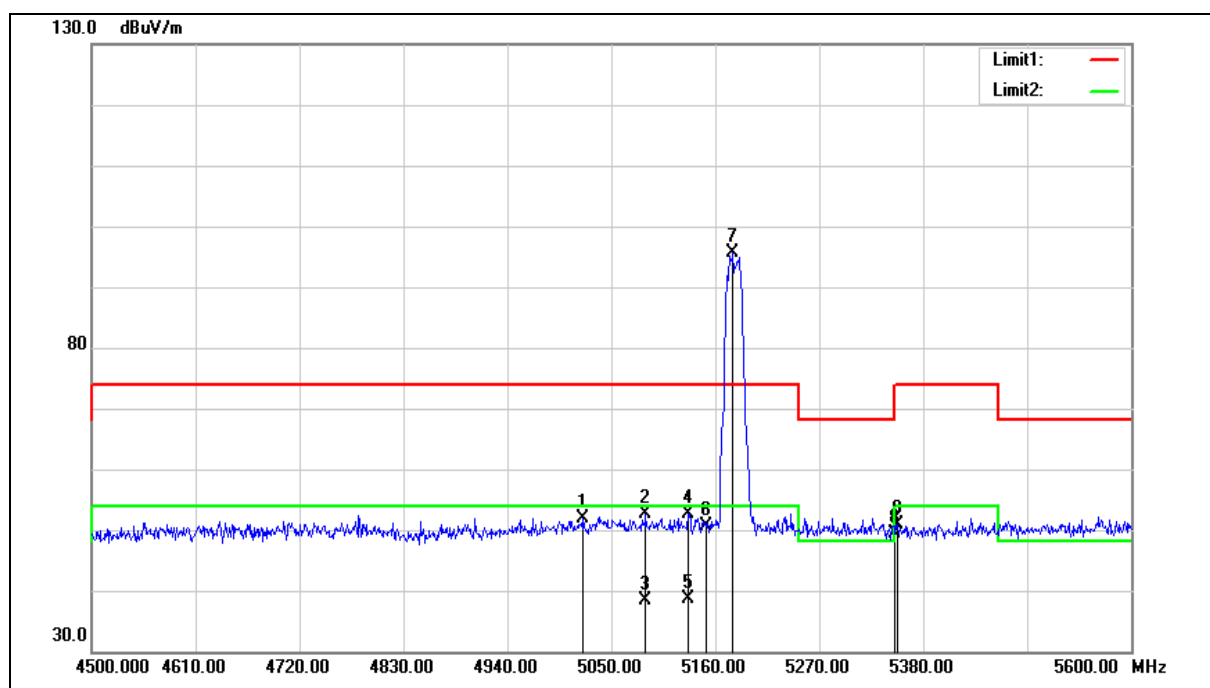


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5020.300	52.69	-0.73	51.96	74.00	-22.04	peak
2	5086.300	53.29	-0.60	52.69	74.00	-21.31	peak
3	5086.300	39.10	-0.60	38.50	54.00	-15.50	AVG
4	5131.400	53.23	-0.51	52.72	74.00	-21.28	peak
5	5131.400	39.16	-0.51	38.65	54.00	-15.35	AVG
6	5150.000	51.18	-0.48	50.70	74.00	-23.30	peak
7	5178.700	96.00	-0.42	95.58	--	--	peak
8	5350.000	49.43	-0.08	49.35	74.00	-24.65	peak
9	5352.500	50.99	-0.08	50.91	74.00	-23.09	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

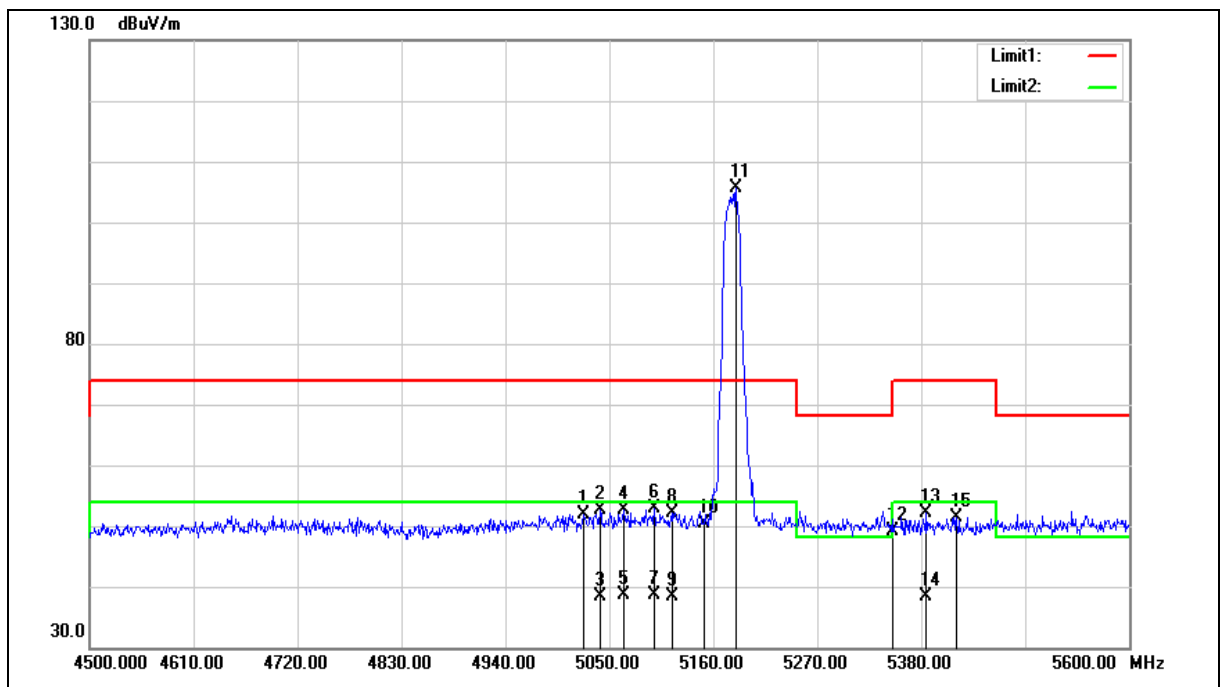

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5022.500	52.69	-0.72	51.97	74.00	-22.03	peak
2	5040.100	53.23	-0.69	52.54	74.00	-21.46	peak
3	5040.100	39.18	-0.69	38.49	54.00	-15.51	AVG
4	5065.400	53.15	-0.64	52.51	74.00	-21.49	peak
5	5065.400	39.33	-0.64	38.69	54.00	-15.31	AVG
6	5097.300	53.51	-0.57	52.94	74.00	-21.06	peak
7	5097.300	39.28	-0.57	38.71	54.00	-15.29	AVG
8	5116.000	52.59	-0.54	52.05	74.00	-21.95	peak
9	5116.000	39.00	-0.54	38.46	54.00	-15.54	AVG
10	5150.000	50.83	-0.48	50.35	74.00	-23.65	peak
11	5184.200	106.05	-0.40	105.65	--	--	peak
12	5350.000	49.24	-0.08	49.16	74.00	-24.84	peak
13	5385.500	52.05	0.00	52.05	74.00	-21.95	peak
14	5385.500	38.49	0.00	38.49	54.00	-15.51	AVG
15	5417.400	51.43	0.05	51.48	74.00	-22.52	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

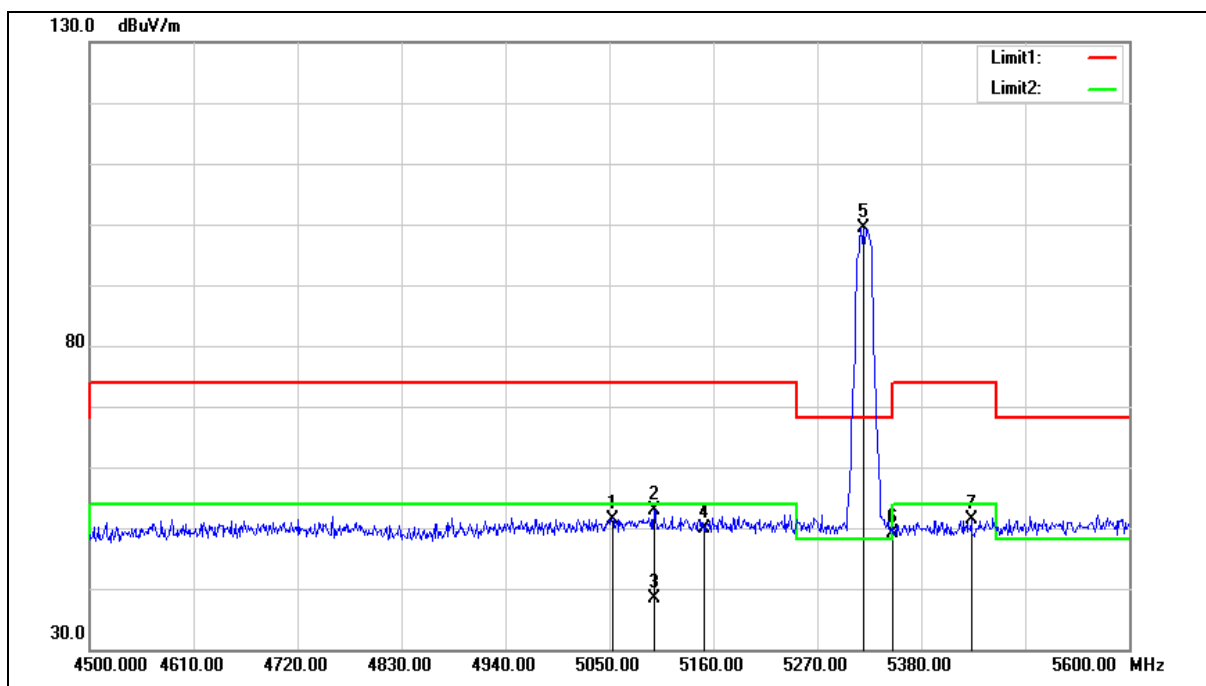


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5053.300	52.16	-0.66	51.50	74.00	-22.50	peak
2	5097.300	53.47	-0.57	52.90	74.00	-21.10	peak
3	5097.300	38.89	-0.57	38.32	54.00	-15.68	AVG
4	5150.000	50.48	-0.48	50.00	74.00	-24.00	peak
5	5318.400	99.62	-0.15	99.47	--	--	peak
6	5350.000	49.26	-0.08	49.18	74.00	-24.82	peak
7	5432.800	51.26	0.09	51.35	74.00	-22.65	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

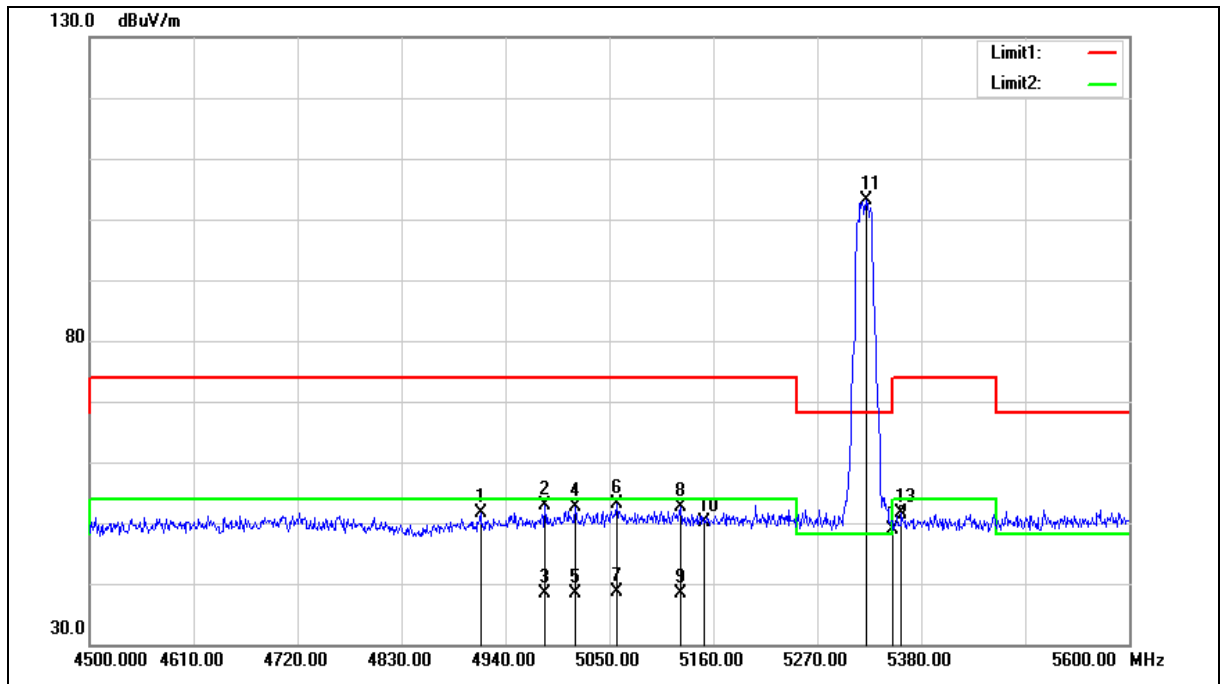

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4913.600	52.75	-1.01	51.74	74.00	-22.26	peak
2	4981.800	53.62	-0.82	52.80	74.00	-21.20	peak
3	4981.800	39.15	-0.82	38.33	54.00	-15.67	AVG
4	5013.700	53.49	-0.74	52.75	74.00	-21.25	peak
5	5013.700	39.20	-0.74	38.46	54.00	-15.54	AVG
6	5057.700	53.88	-0.65	53.23	74.00	-20.77	peak
7	5057.700	39.25	-0.65	38.60	54.00	-15.40	AVG
8	5125.900	53.12	-0.52	52.60	74.00	-21.40	peak
9	5125.900	39.02	-0.52	38.50	54.00	-15.50	AVG
10	5150.000	50.51	-0.48	50.03	74.00	-23.97	peak
11	5321.700	103.36	-0.14	103.22	--	--	peak
12	5350.000	49.05	-0.08	48.97	74.00	-25.03	peak
13	5359.100	51.68	-0.06	51.62	74.00	-22.38	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

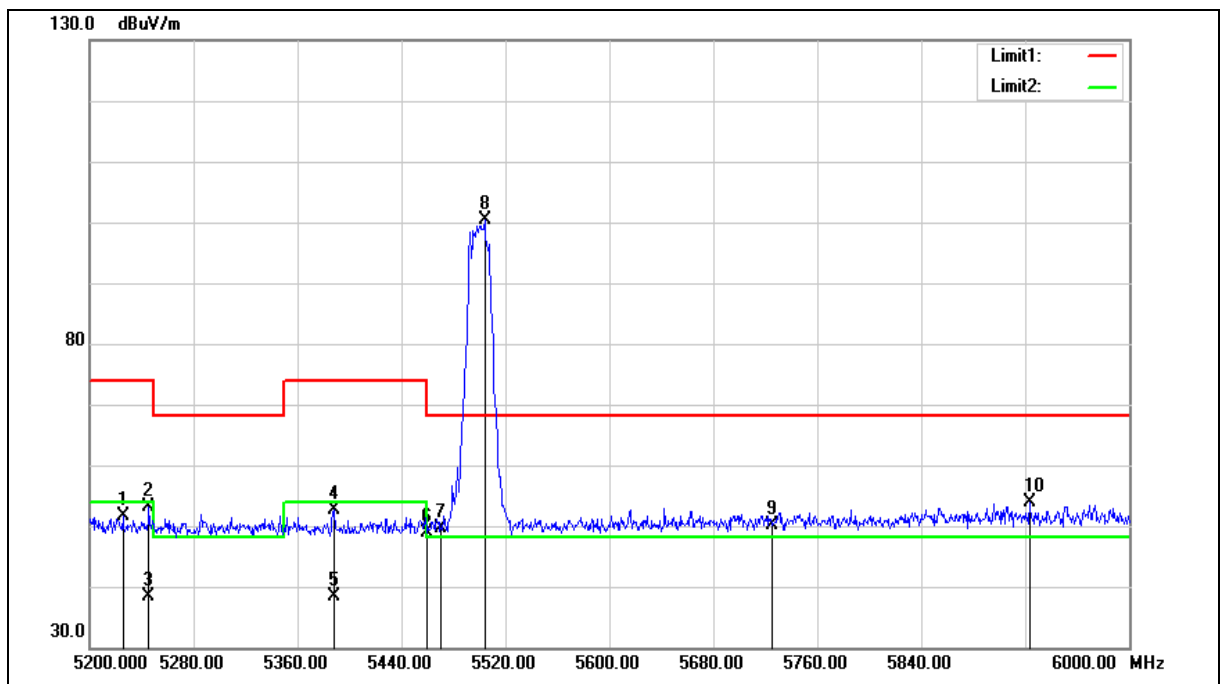

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5225.600	51.87	-0.32	51.55	74.00	-22.45	peak
2	5245.600	53.41	-0.28	53.13	74.00	-20.87	peak
3	5245.600	38.77	-0.28	38.49	54.00	-15.51	AVG
4	5388.000	52.53	0.00	52.53	74.00	-21.47	peak
5	5388.000	38.46	0.00	38.46	54.00	-15.54	AVG
6	5460.000	48.63	0.14	48.77	74.00	-25.23	peak
7	5470.000	49.56	0.16	49.72	68.20	-18.48	peak
8	5504.000	100.14	0.23	100.37	--	--	peak
9	5725.000	49.27	0.82	50.09	68.20	-18.11	peak
10	5923.200	52.51	1.37	53.88	68.20	-14.32	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

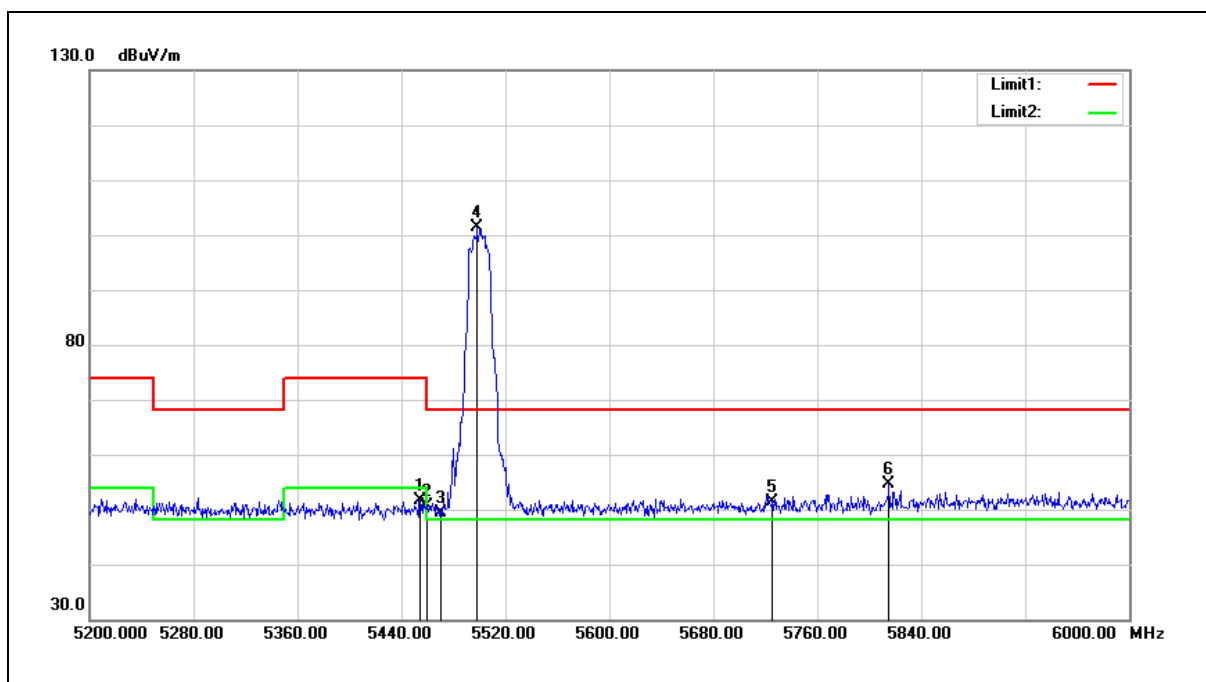


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5454.400	51.59	0.12	51.71	74.00	-22.29	peak
2	5460.000	50.38	0.14	50.52	74.00	-23.48	peak
3	5470.000	49.18	0.16	49.34	68.20	-18.86	peak
4	5498.400	101.27	0.21	101.48	--	--	peak
5	5725.000	50.52	0.82	51.34	68.20	-16.86	peak
6	5815.200	53.52	1.06	54.58	68.20	-13.62	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

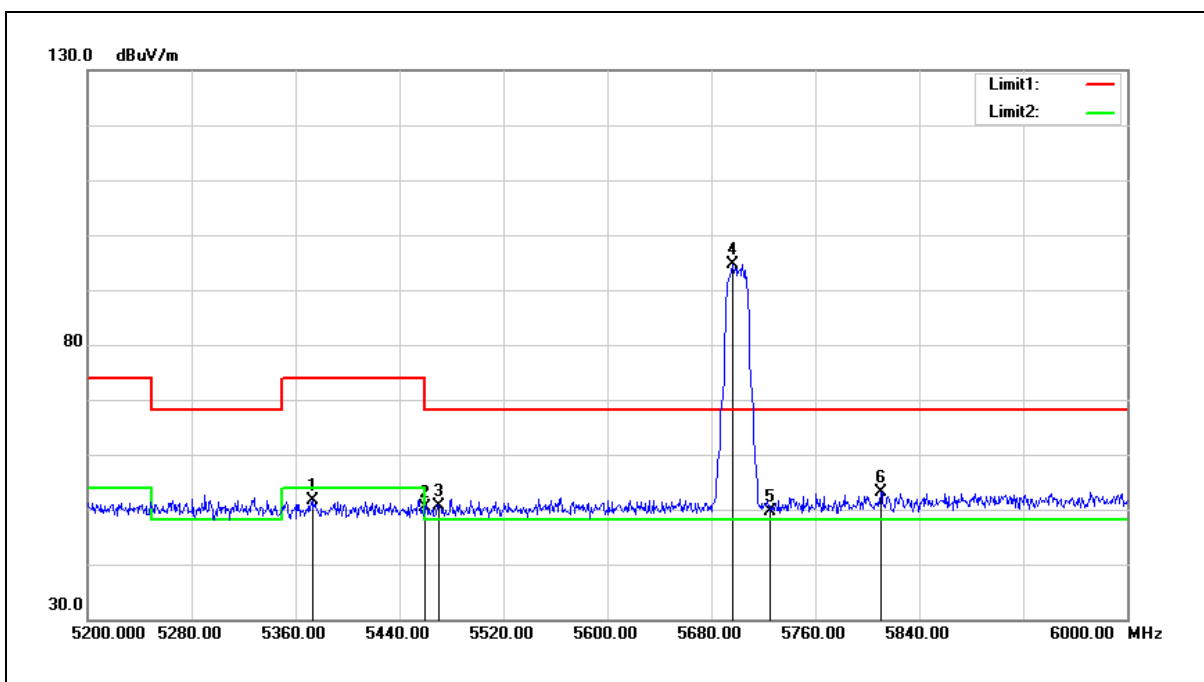


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5372.800	51.65	-0.03	51.62	74.00	-22.38	peak
2	5460.000	50.21	0.14	50.35	74.00	-23.65	peak
3	5470.000	50.36	0.16	50.52	68.20	-17.68	peak
4	5696.000	93.94	0.74	94.68	--	--	peak
5	5725.000	48.71	0.82	49.53	68.20	-18.67	peak
6	5810.400	52.11	1.06	53.17	68.20	-15.03	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

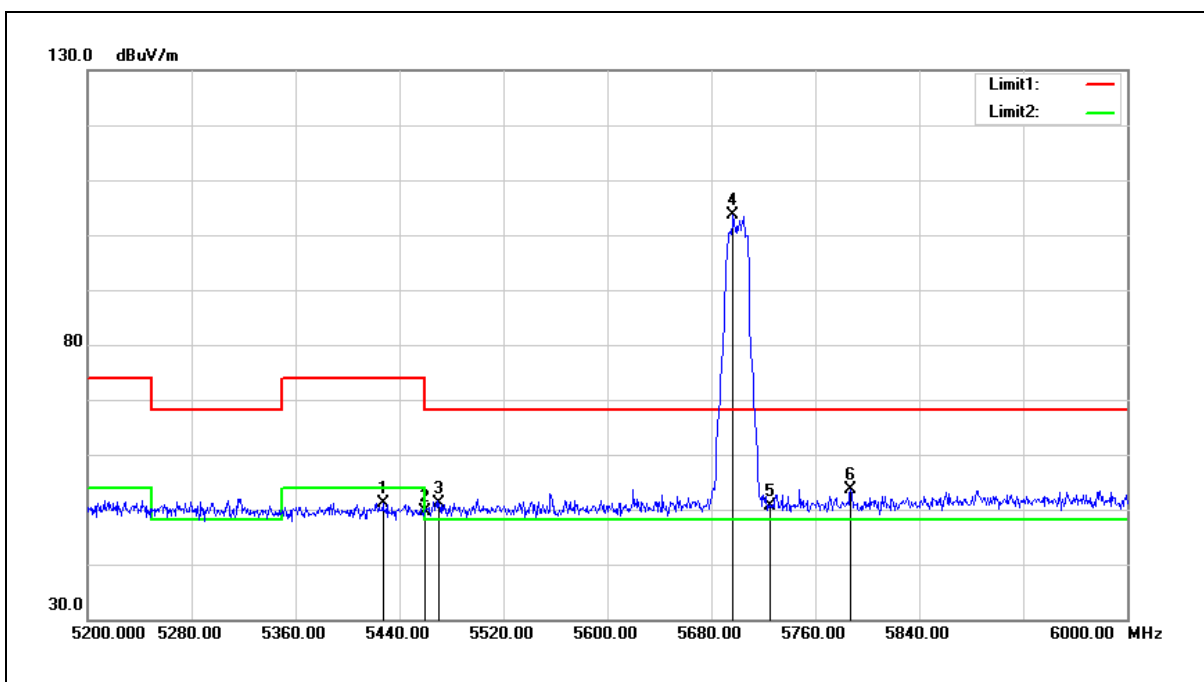


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5427.200	51.10	0.07	51.17	74.00	-22.83	peak
2	5460.000	49.40	0.14	49.54	74.00	-24.46	peak
3	5470.000	50.85	0.16	51.01	68.20	-17.19	peak
4	5696.800	102.97	0.74	103.71	--	--	peak
5	5725.000	49.82	0.82	50.64	68.20	-17.56	peak
6	5787.200	52.71	0.99	53.70	68.20	-14.50	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

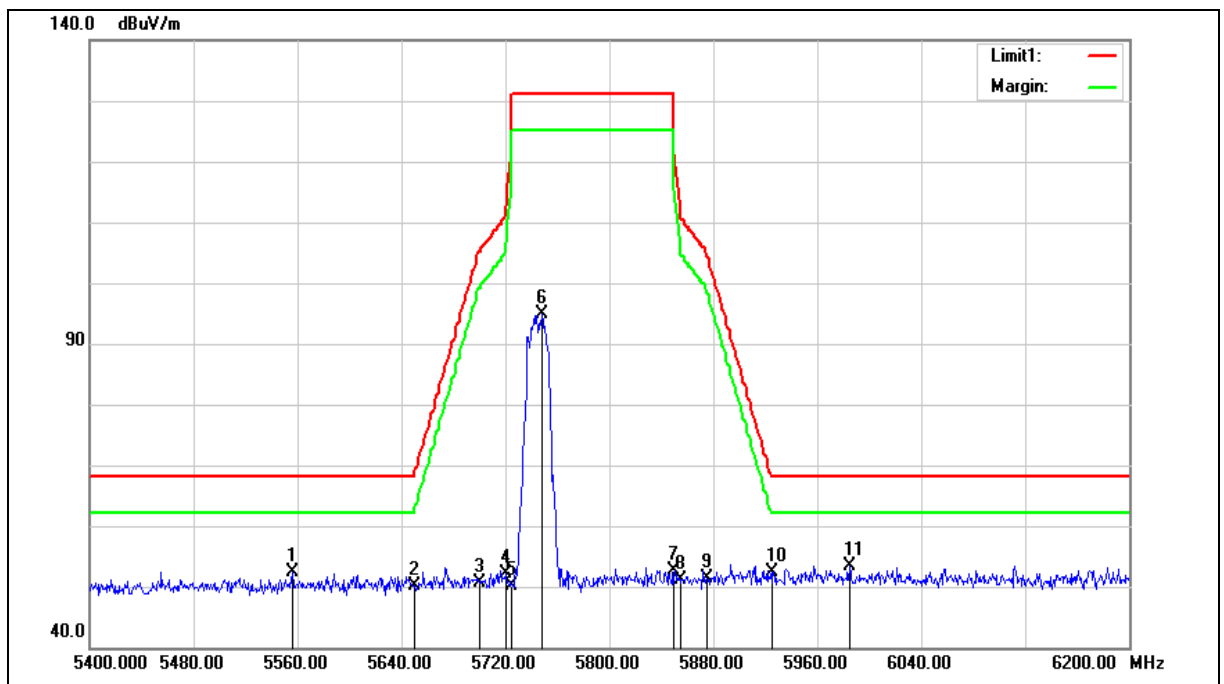

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5556.000	52.04	0.36	52.40	68.20	-15.80	peak
2	5650.000	49.48	0.62	50.10	68.20	-18.10	peak
3	5700.000	49.82	0.75	50.57	105.20	-54.63	peak
4	5720.000	51.31	0.81	52.12	110.80	-58.68	peak
5	5725.000	49.42	0.82	50.24	122.20	-71.96	peak
6	5748.000	94.01	0.89	94.90	--	--	peak
7	5850.000	51.41	1.17	52.58	122.20	-69.62	peak
8	5855.000	49.90	1.18	51.08	110.80	-59.72	peak
9	5875.000	50.09	1.23	51.32	105.20	-53.88	peak
10	5925.000	50.97	1.37	52.34	68.20	-15.86	peak
11	5984.800	51.96	1.53	53.49	68.20	-14.71	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

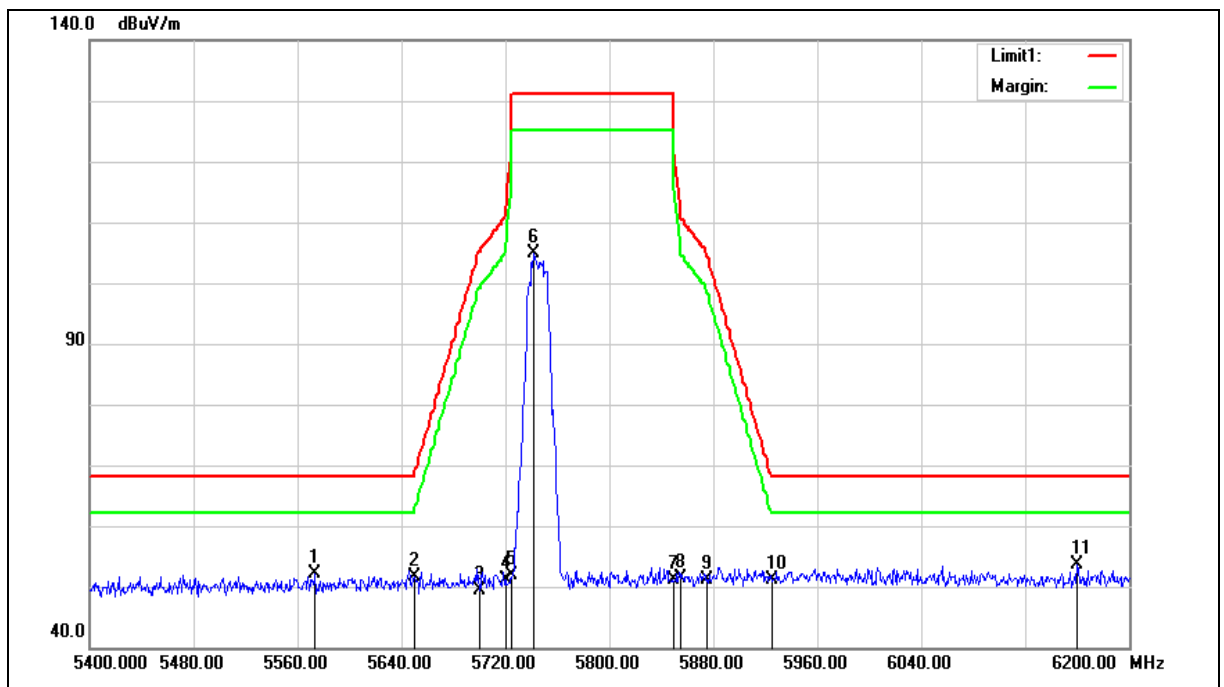

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5573.600	51.59	0.42	52.01	68.20	-16.19	peak
2	5650.000	51.12	0.62	51.74	68.20	-16.46	peak
3	5700.000	48.64	0.75	49.39	105.20	-55.81	peak
4	5720.000	50.24	0.81	51.05	110.80	-59.75	peak
5	5725.000	51.13	0.82	51.95	122.20	-70.25	peak
6	5741.600	103.98	0.87	104.85	--	--	peak
7	5850.000	50.05	1.17	51.22	122.20	-70.98	peak
8	5855.000	50.27	1.18	51.45	110.80	-59.35	peak
9	5875.000	49.83	1.23	51.06	105.20	-54.14	peak
10	5925.000	49.79	1.37	51.16	68.20	-17.04	peak
11	6160.000	51.59	2.14	53.73	68.20	-14.47	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

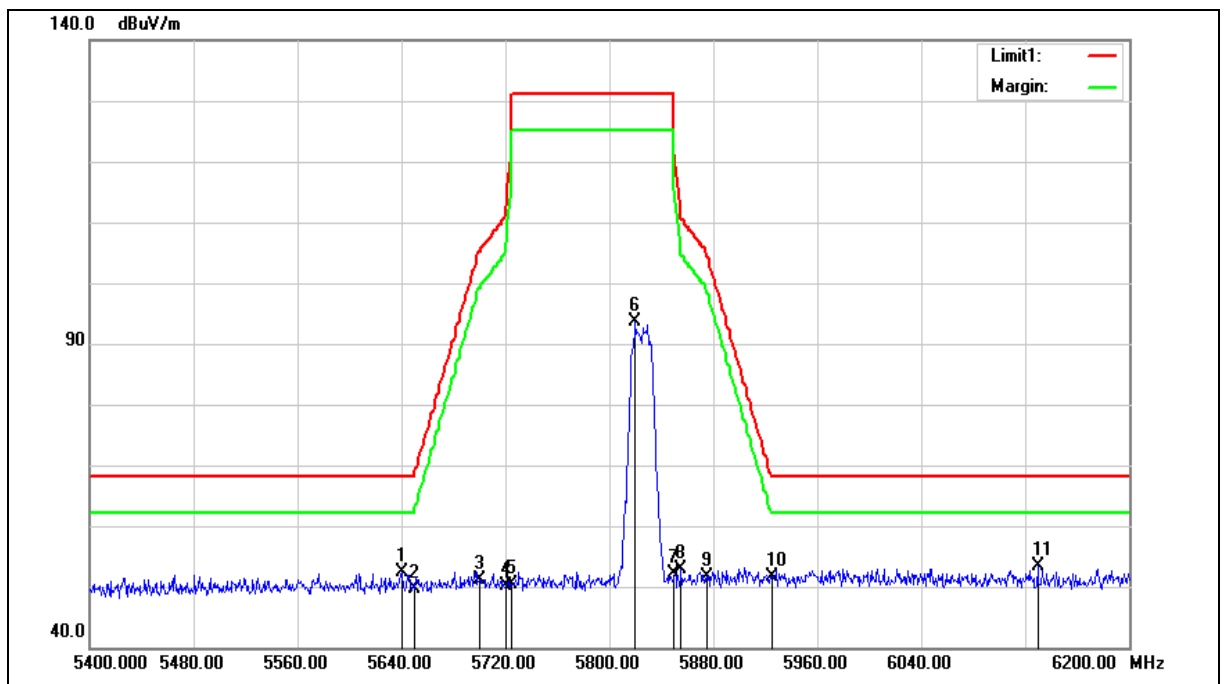

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5640.000	51.73	0.59	52.32	68.20	-15.88	peak
2	5650.000	49.01	0.62	49.63	68.20	-18.57	peak
3	5700.000	50.45	0.75	51.20	105.20	-54.00	peak
4	5720.000	49.40	0.81	50.21	110.80	-60.59	peak
5	5725.000	49.52	0.82	50.34	122.20	-71.86	peak
6	5820.000	92.49	1.08	93.57	--	--	peak
7	5850.000	51.04	1.17	52.21	122.20	-69.99	peak
8	5855.000	51.59	1.18	52.77	110.80	-58.03	peak
9	5875.000	50.36	1.23	51.59	105.20	-53.61	peak
10	5925.000	50.26	1.37	51.63	68.20	-16.57	peak
11	6129.600	51.45	2.03	53.48	68.20	-14.72	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

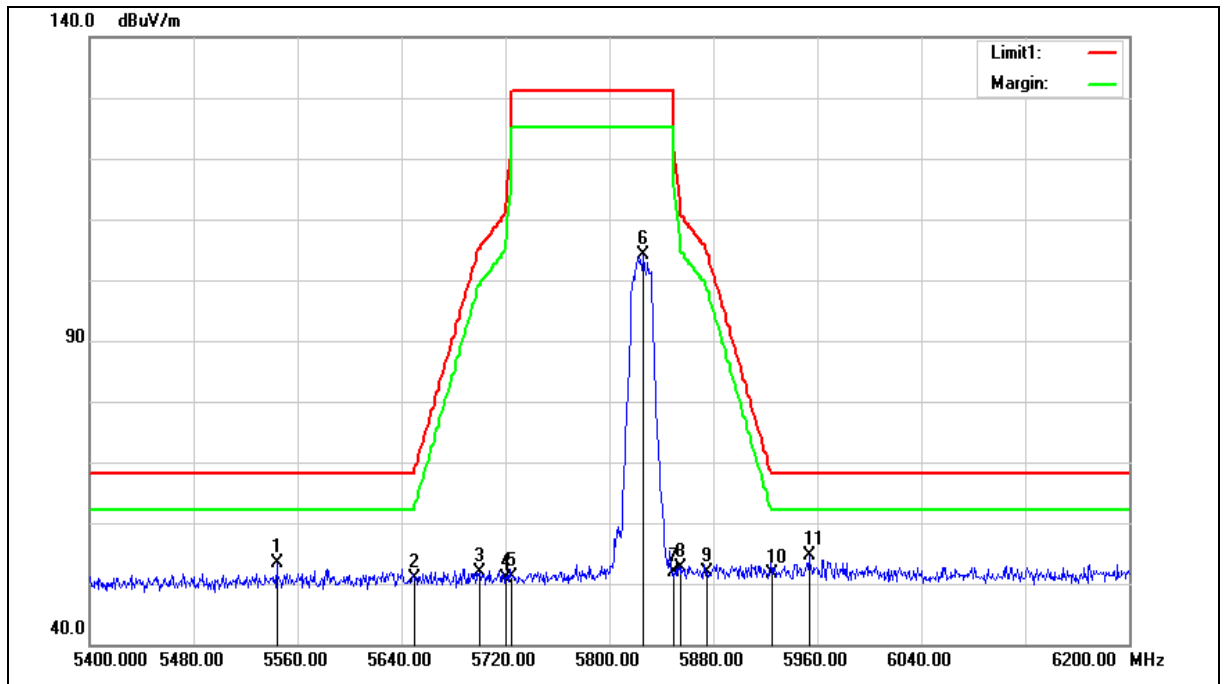

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5544.000	53.00	0.34	53.34	68.20	-14.86	peak
2	5650.000	50.33	0.62	50.95	68.20	-17.25	peak
3	5700.000	51.09	0.75	51.84	105.20	-53.36	peak
4	5720.000	50.19	0.81	51.00	110.80	-59.80	peak
5	5725.000	50.36	0.82	51.18	122.20	-71.02	peak
6	5826.400	103.00	1.10	104.10	--	--	peak
7	5850.000	50.67	1.17	51.84	122.20	-70.36	peak
8	5855.000	51.43	1.18	52.61	110.80	-58.19	peak
9	5875.000	50.69	1.23	51.92	105.20	-53.28	peak
10	5925.000	50.34	1.37	51.71	68.20	-16.49	peak
11	5953.600	53.15	1.45	54.60	68.20	-13.60	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

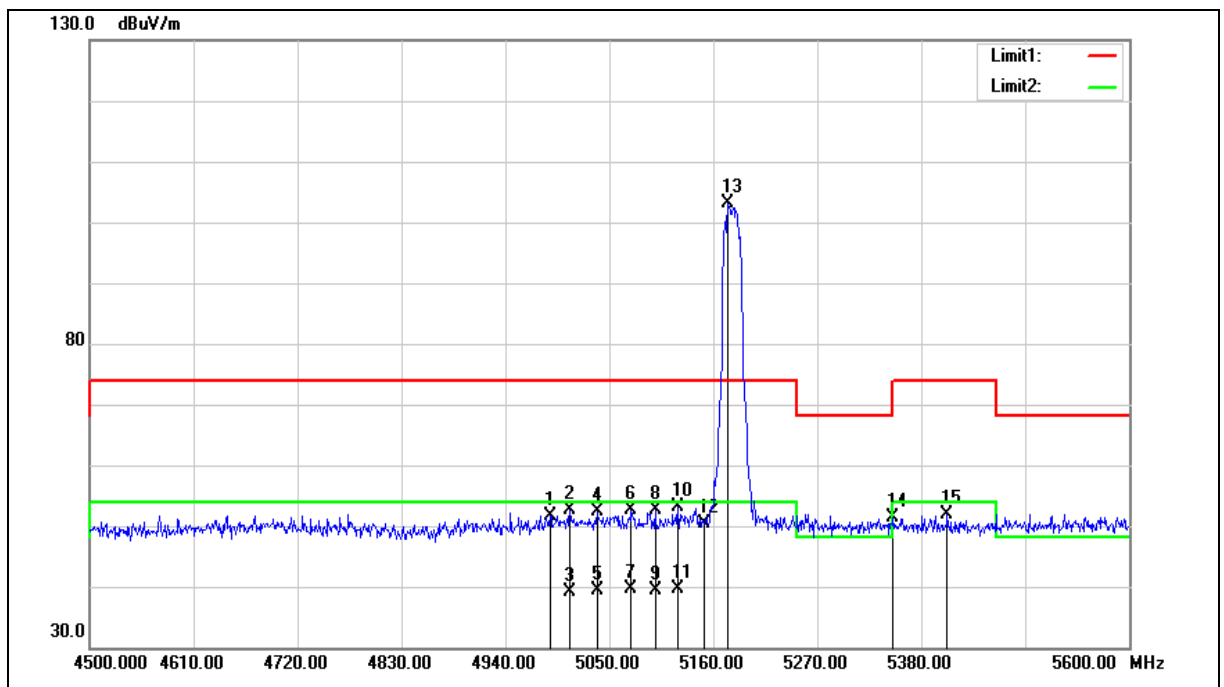

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4987.300	52.41	-0.81	51.60	74.00	-22.40	peak
2	5008.200	53.29	-0.75	52.54	74.00	-21.46	peak
3	5008.200	40.00	-0.75	39.25	54.00	-14.75	AVG
4	5036.800	53.04	-0.69	52.35	74.00	-21.65	peak
5	5036.800	40.05	-0.69	39.36	54.00	-14.64	AVG
6	5073.100	53.15	-0.62	52.53	74.00	-21.47	peak
7	5073.100	40.31	-0.62	39.69	54.00	-14.31	AVG
8	5098.400	53.18	-0.57	52.61	74.00	-21.39	peak
9	5098.400	39.85	-0.57	39.28	54.00	-14.72	AVG
10	5122.600	53.74	-0.53	53.21	74.00	-20.79	peak
11	5122.600	40.09	-0.53	39.56	54.00	-14.44	AVG
12	5150.000	50.98	-0.48	50.50	74.00	-23.50	peak
13	5175.400	103.47	-0.43	103.04	--	--	peak
14	5350.000	51.52	-0.08	51.44	74.00	-22.56	peak
15	5407.500	51.82	0.04	51.86	74.00	-22.14	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

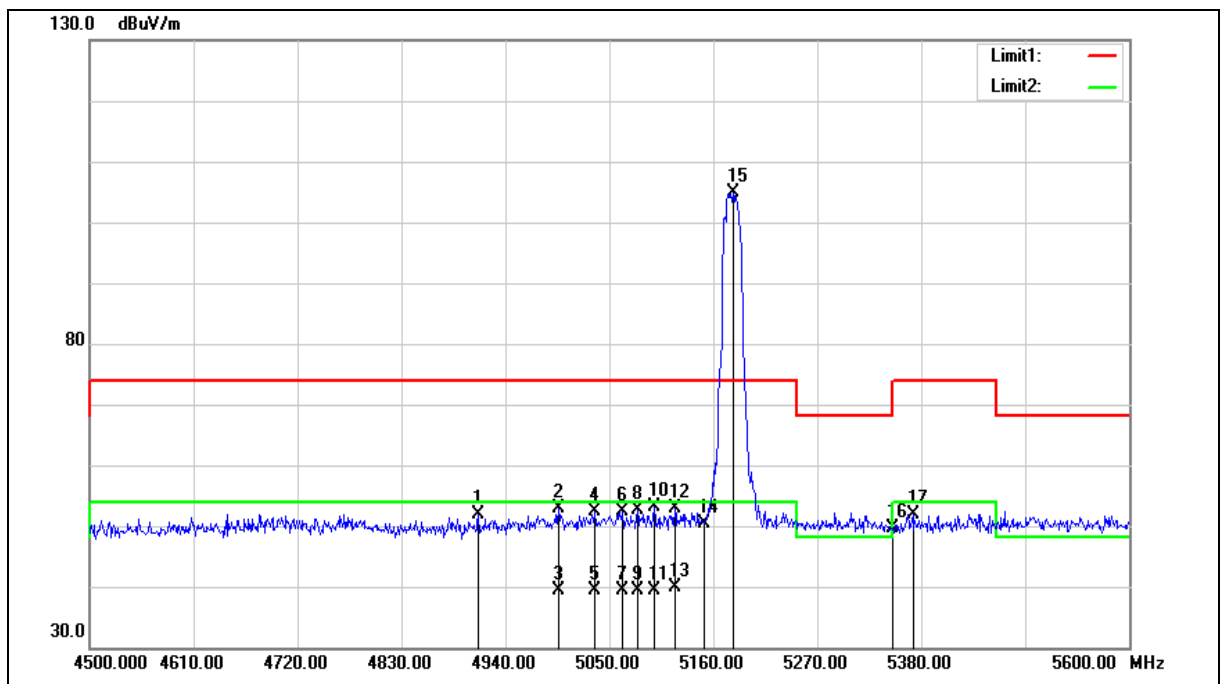

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4911.400	52.83	-1.01	51.82	74.00	-22.18	peak
2	4996.100	53.76	-0.78	52.98	74.00	-21.02	peak
3	4996.100	40.24	-0.78	39.46	54.00	-14.54	AVG
4	5034.600	53.11	-0.70	52.41	74.00	-21.59	peak
5	5034.600	40.05	-0.70	39.35	54.00	-14.65	AVG
6	5064.300	53.06	-0.65	52.41	74.00	-21.59	peak
7	5064.300	40.13	-0.65	39.48	54.00	-14.52	AVG
8	5079.700	53.15	-0.62	52.53	74.00	-21.47	peak
9	5079.700	40.08	-0.62	39.46	54.00	-14.54	AVG
10	5097.300	53.63	-0.57	53.06	74.00	-20.94	peak
11	5097.300	39.94	-0.57	39.37	54.00	-14.63	AVG
12	5119.300	53.38	-0.53	52.85	74.00	-21.15	peak
13	5119.300	40.36	-0.53	39.83	54.00	-14.17	AVG
14	5150.000	50.91	-0.48	50.43	74.00	-23.57	peak
15	5180.900	105.39	-0.42	104.97	--	--	peak
16	5350.000	49.75	-0.08	49.67	74.00	-24.33	peak
17	5371.200	51.93	-0.03	51.90	74.00	-22.10	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

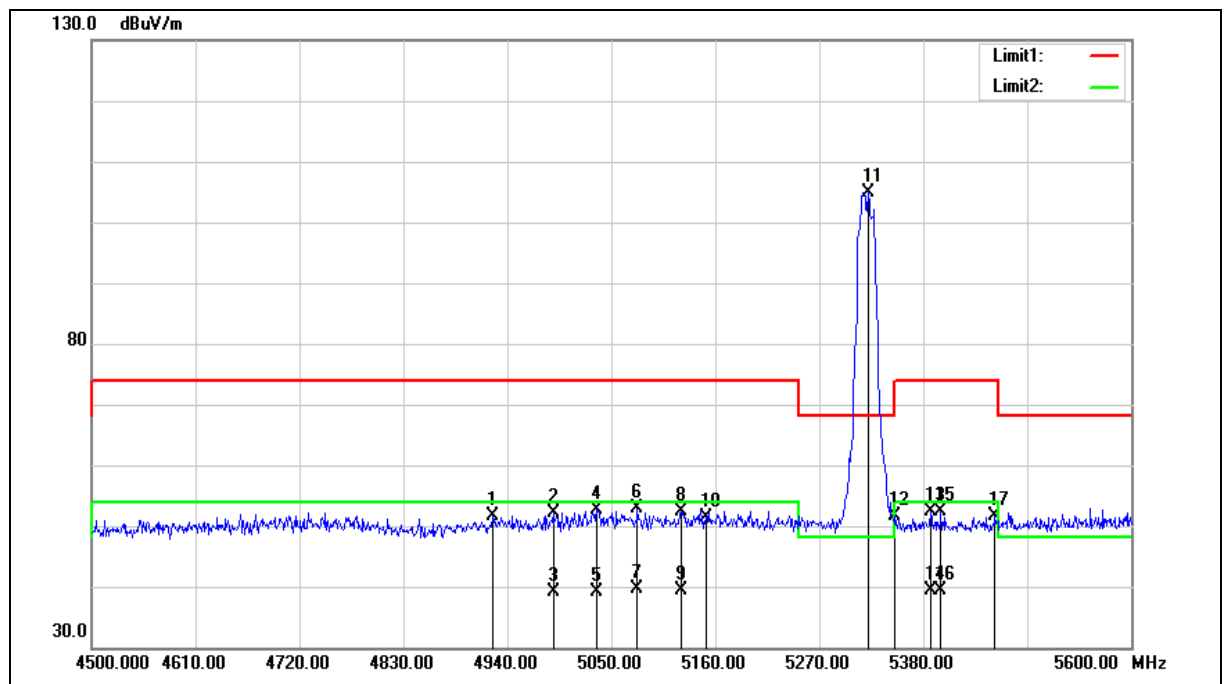

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.600	52.55	-0.99	51.56	74.00	-22.44	peak
2	4988.400	52.98	-0.81	52.17	74.00	-21.83	peak
3	4988.400	40.06	-0.81	39.25	54.00	-14.75	AVG
4	5034.600	53.25	-0.70	52.55	74.00	-21.45	peak
5	5034.600	39.84	-0.70	39.14	54.00	-14.86	AVG
6	5077.500	53.43	-0.62	52.81	74.00	-21.19	peak
7	5077.500	40.24	-0.62	39.62	54.00	-14.38	AVG
8	5123.700	52.93	-0.52	52.41	74.00	-21.59	peak
9	5123.700	39.96	-0.52	39.44	54.00	-14.56	AVG
10	5150.000	51.94	-0.48	51.46	74.00	-22.54	peak
11	5321.700	105.14	-0.14	105.00	--	--	peak
12	5350.000	51.74	-0.08	51.66	74.00	-22.34	peak
13	5387.700	52.43	0.00	52.43	74.00	-21.57	peak
14	5387.700	39.42	0.00	39.42	54.00	-14.58	AVG
15	5398.700	52.45	0.02	52.47	74.00	-21.53	peak
16	5398.700	39.33	0.02	39.35	54.00	-14.65	AVG
17	5455.900	51.53	0.12	51.65	74.00	-22.35	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

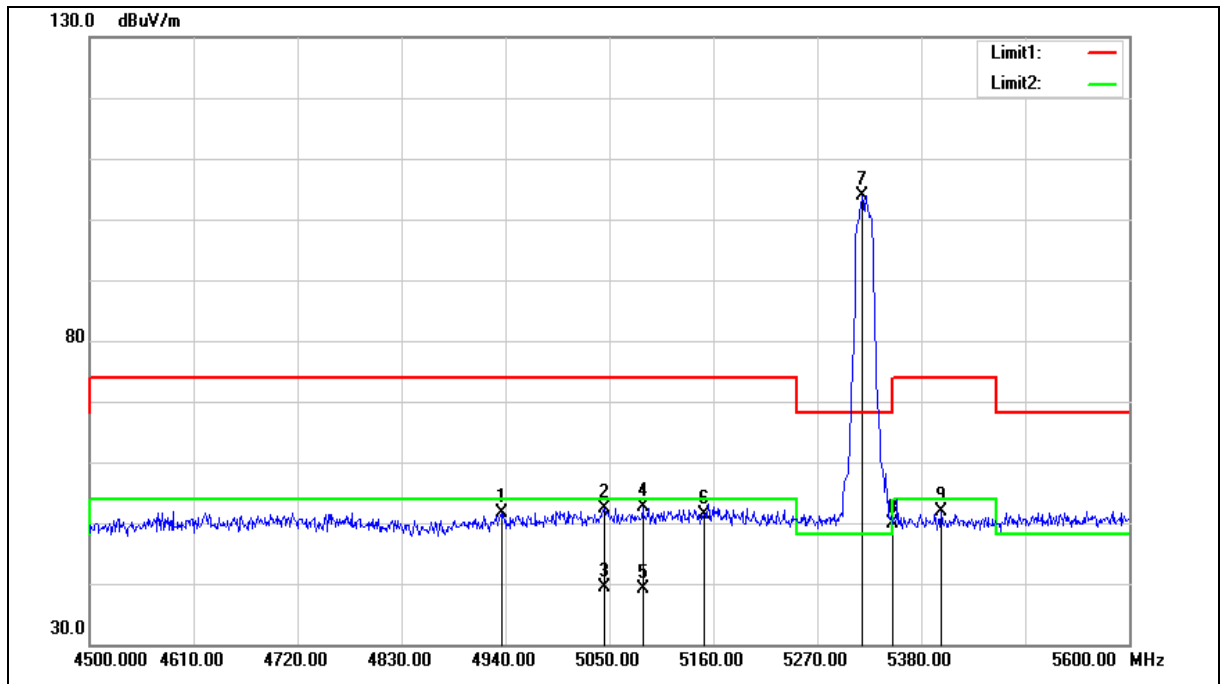

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4935.600	52.49	-0.95	51.54	74.00	-22.46	peak
2	5044.500	53.10	-0.68	52.42	74.00	-21.58	peak
3	5044.500	40.07	-0.68	39.39	54.00	-14.61	AVG
4	5085.200	53.19	-0.60	52.59	74.00	-21.41	peak
5	5085.200	39.71	-0.60	39.11	54.00	-14.89	AVG
6	5150.000	51.93	-0.48	51.45	74.00	-22.55	peak
7	5317.300	103.97	-0.15	103.82	--	--	peak
8	5350.000	49.92	-0.08	49.84	74.00	-24.16	peak
9	5400.900	51.94	0.02	51.96	74.00	-22.04	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

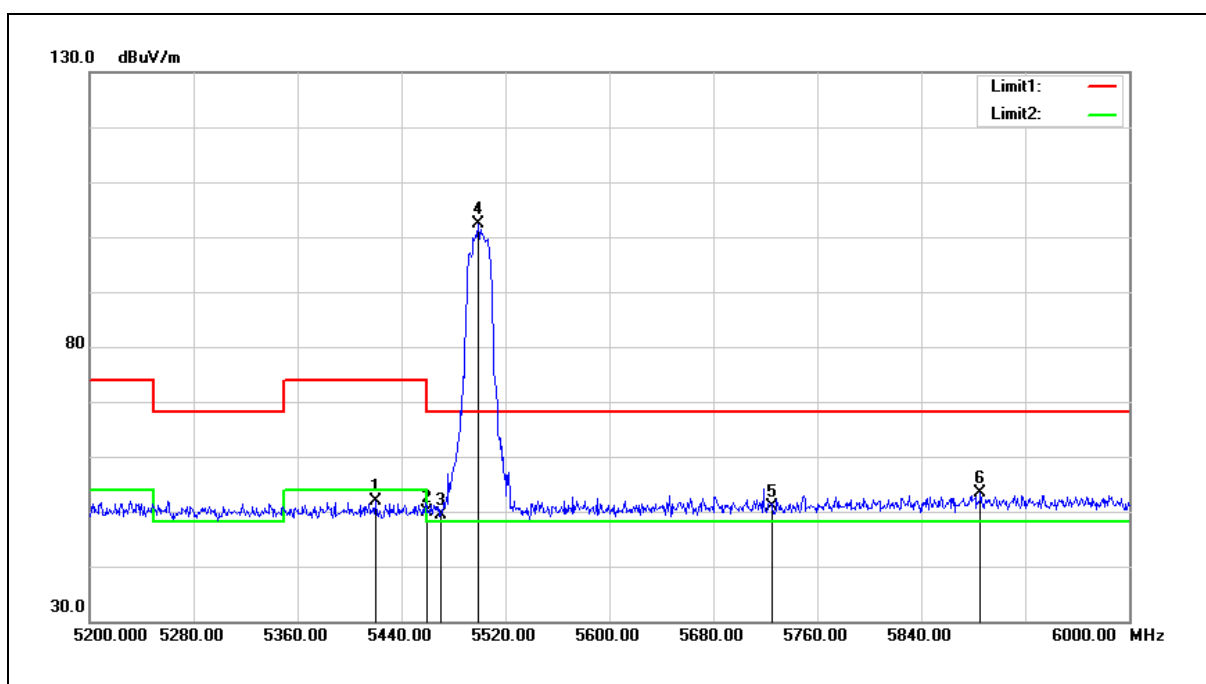


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5420.000	51.93	0.06	51.99	74.00	-22.01	peak
2	5460.000	49.65	0.14	49.79	74.00	-24.21	peak
3	5470.000	49.15	0.16	49.31	68.20	-18.89	peak
4	5499.200	102.13	0.21	102.34	--	--	peak
5	5725.000	49.95	0.82	50.77	68.20	-17.43	peak
6	5885.600	52.00	1.26	53.26	68.20	-14.94	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

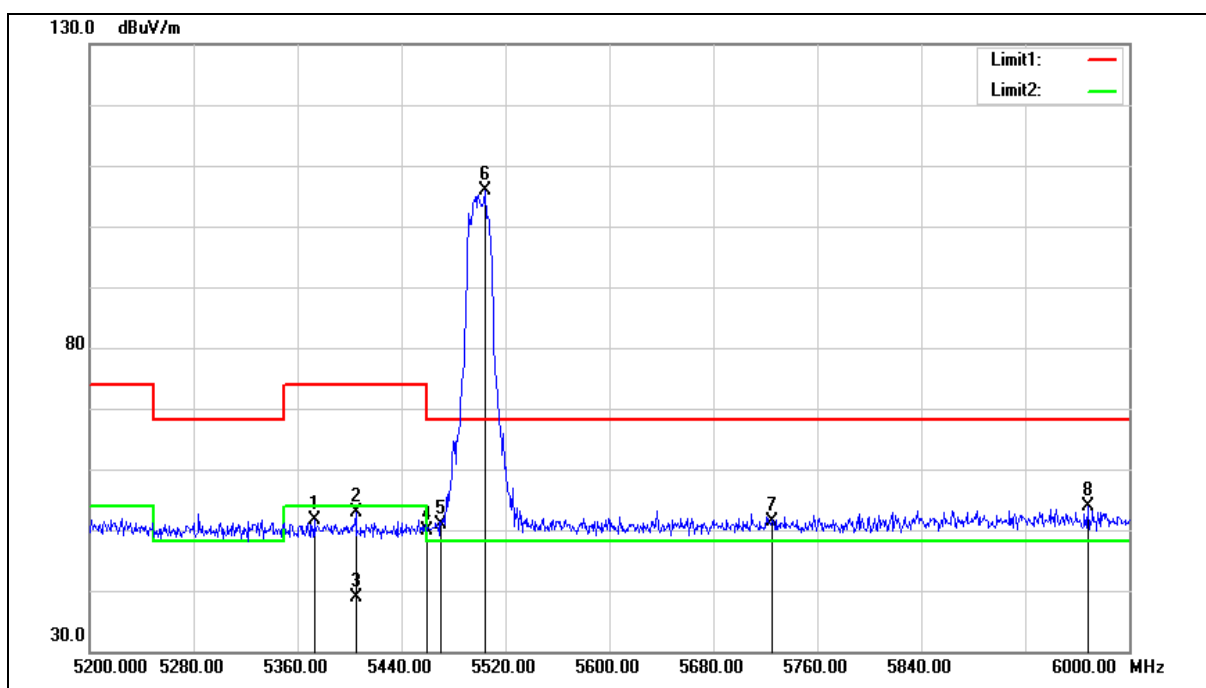


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5372.800	51.64	-0.03	51.61	74.00	-22.39	peak
2	5404.800	52.79	0.02	52.81	74.00	-21.19	peak
3	5404.800	38.92	0.02	38.94	54.00	-15.06	AVG
4	5460.000	49.81	0.14	49.95	74.00	-24.05	peak
5	5470.000	50.62	0.16	50.78	68.20	-17.42	peak
6	5504.800	105.71	0.23	105.94	--	--	peak
7	5725.000	50.52	0.82	51.34	68.20	-16.86	peak
8	5968.000	52.40	1.49	53.89	68.20	-14.31	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

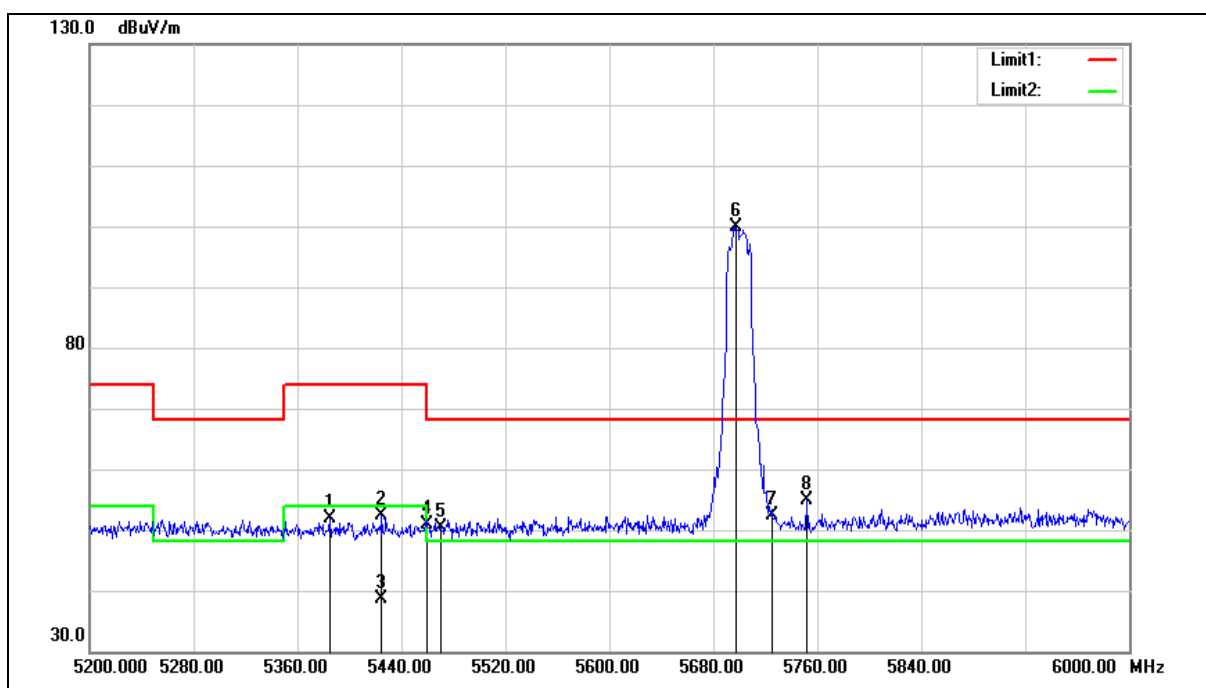


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5384.800	51.93	-0.01	51.92	74.00	-22.08	peak
2	5424.800	52.27	0.06	52.33	74.00	-21.67	peak
3	5424.800	38.47	0.06	38.53	54.00	-15.47	AVG
4	5460.000	50.75	0.14	50.89	74.00	-23.11	peak
5	5470.000	50.20	0.16	50.36	68.20	-17.84	peak
6	5697.600	99.21	0.75	99.96	--	--	peak
7	5725.000	51.57	0.82	52.39	68.20	-15.81	peak
8	5752.000	53.92	0.90	54.82	68.20	-13.38	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

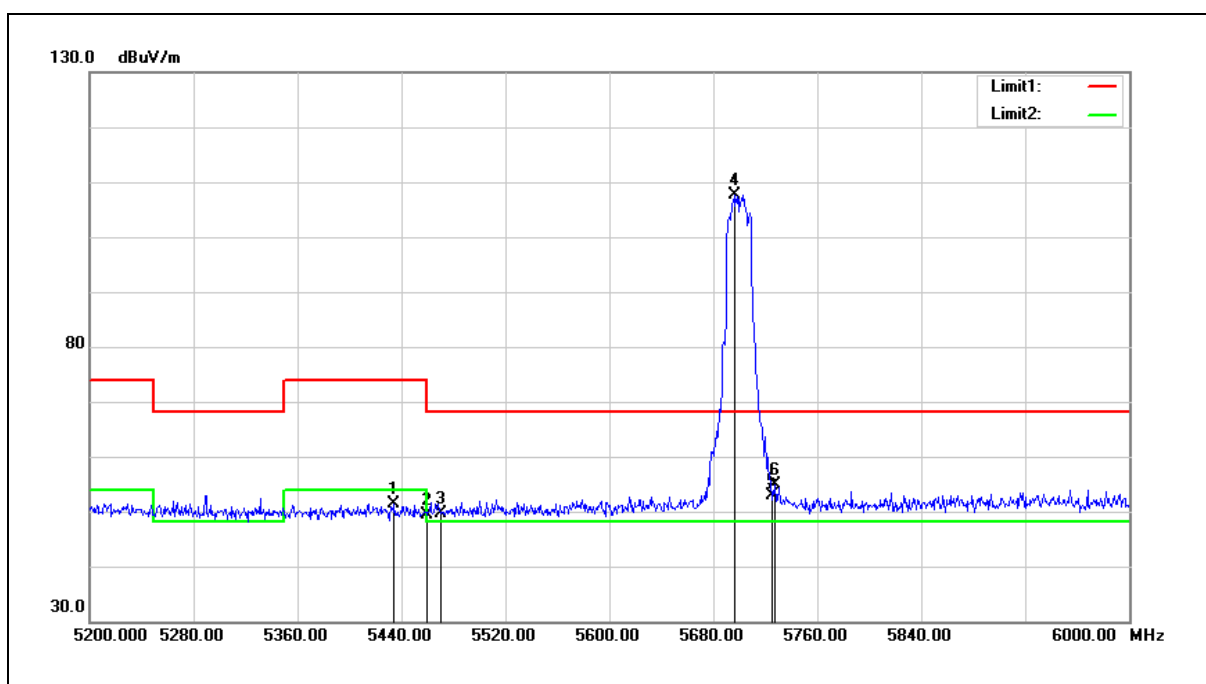


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5434.400	51.17	0.09	51.26	74.00	-22.74	peak
2	5460.000	49.19	0.14	49.33	74.00	-24.67	peak
3	5470.000	49.35	0.16	49.51	68.20	-18.69	peak
4	5696.000	106.97	0.74	107.71	--	--	peak
5	5725.000	52.16	0.82	52.98	68.20	-15.22	peak
6	5727.200	53.93	0.83	54.76	68.20	-13.44	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

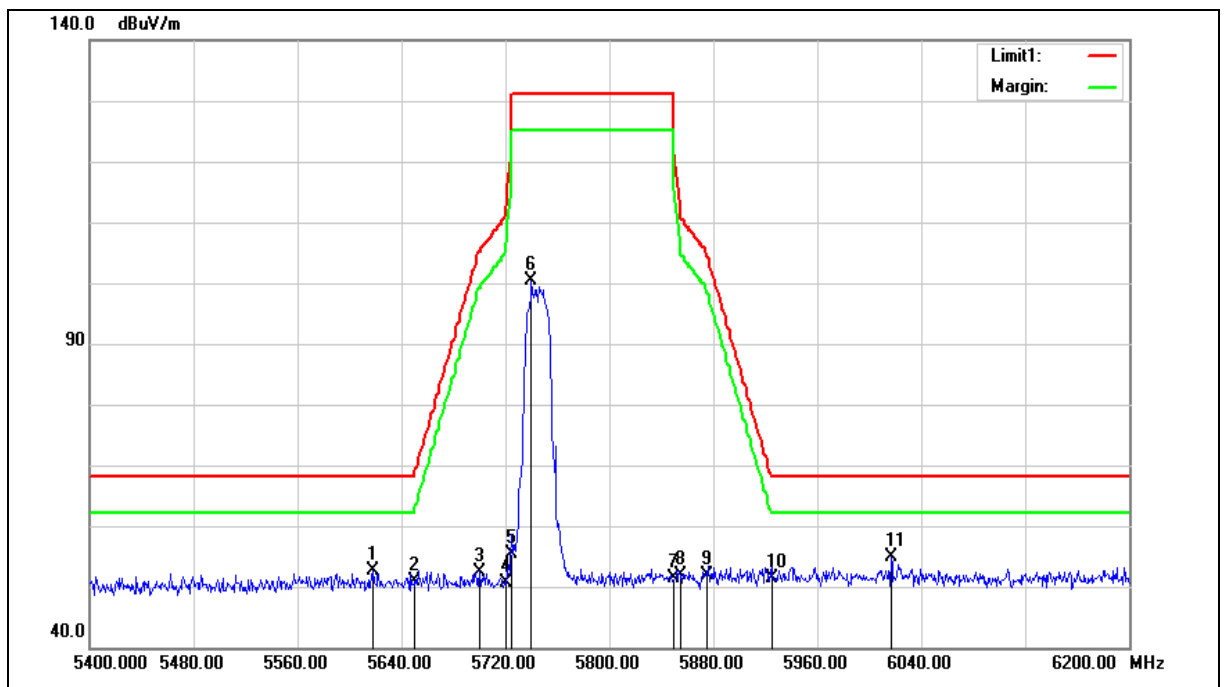

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5618.400	52.08	0.54	52.62	68.20	-15.58	peak
2	5650.000	50.17	0.62	50.79	68.20	-17.41	peak
3	5700.000	51.75	0.75	52.50	105.20	-52.70	peak
4	5720.000	49.82	0.81	50.63	110.80	-60.17	peak
5	5725.000	54.59	0.82	55.41	122.20	-66.79	peak
6	5740.000	99.59	0.86	100.45	--	--	peak
7	5850.000	50.11	1.17	51.28	122.20	-70.92	peak
8	5855.000	50.68	1.18	51.86	110.80	-58.94	peak
9	5875.000	50.76	1.23	51.99	105.20	-53.21	peak
10	5925.000	50.04	1.37	51.41	68.20	-16.79	peak
11	6016.800	53.24	1.63	54.87	68.20	-13.33	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

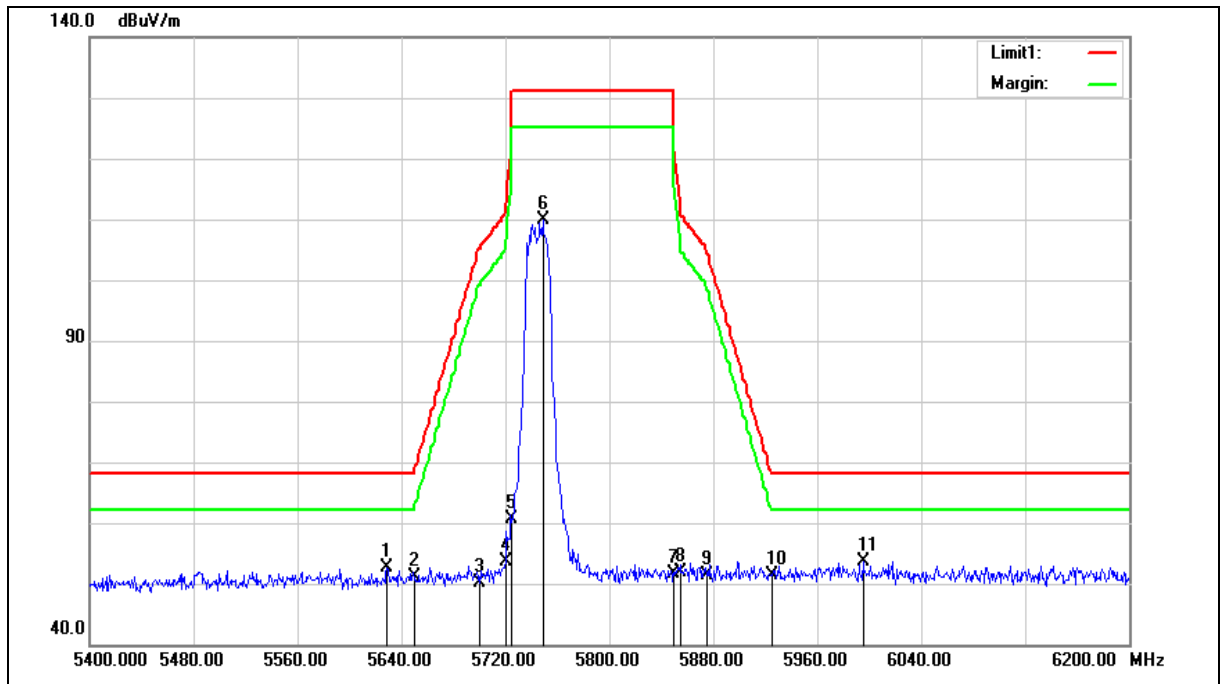

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5628.800	51.99	0.56	52.55	68.20	-15.65	peak
2	5650.000	50.41	0.62	51.03	68.20	-17.17	peak
3	5700.000	49.29	0.75	50.04	105.20	-55.16	peak
4	5720.000	52.70	0.81	53.51	110.80	-57.29	peak
5	5725.000	59.92	0.82	60.74	122.20	-61.46	peak
6	5748.800	108.91	0.89	109.80	--	--	peak
7	5850.000	50.37	1.17	51.54	122.20	-70.66	peak
8	5855.000	50.74	1.18	51.92	110.80	-58.88	peak
9	5875.000	50.16	1.23	51.39	105.20	-53.81	peak
10	5925.000	50.03	1.37	51.40	68.20	-16.80	peak
11	5995.200	52.13	1.56	53.69	68.20	-14.51	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

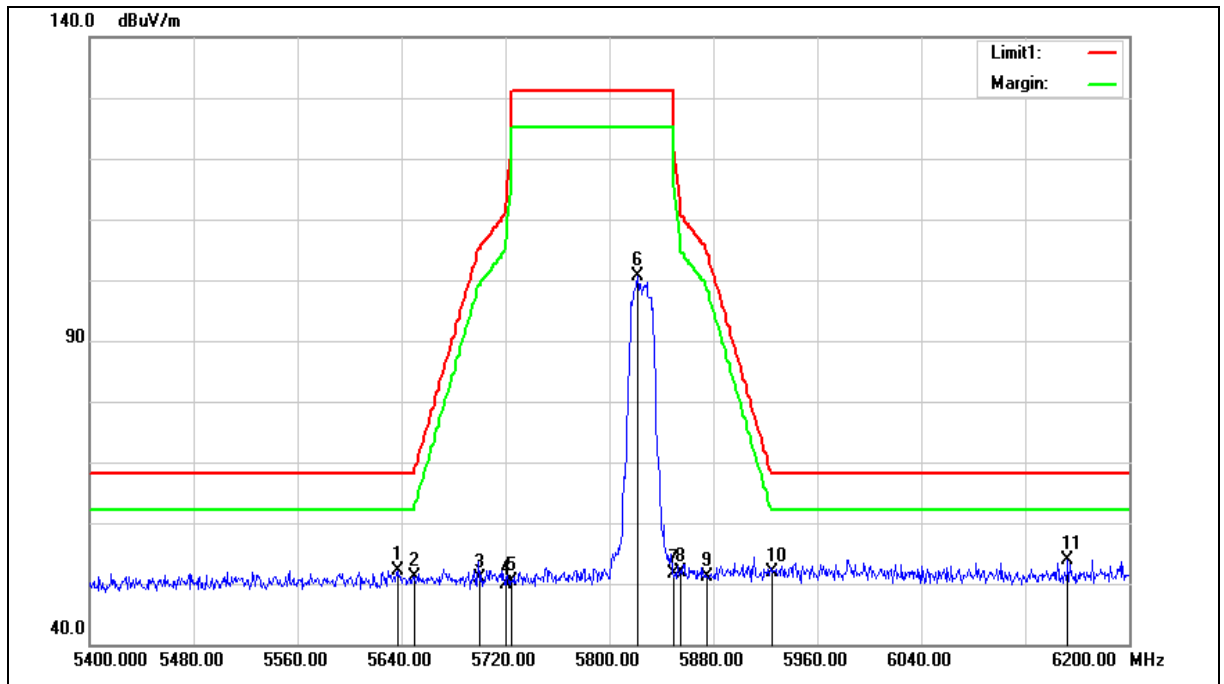

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5637.600	51.64	0.59	52.23	68.20	-15.97	peak
2	5650.000	50.58	0.62	51.20	68.20	-17.00	peak
3	5700.000	50.09	0.75	50.84	105.20	-54.36	peak
4	5720.000	49.04	0.81	49.85	110.80	-60.95	peak
5	5725.000	49.63	0.82	50.45	122.20	-71.75	peak
6	5821.600	99.53	1.09	100.62	--	--	peak
7	5850.000	50.48	1.17	51.65	122.20	-70.55	peak
8	5855.000	50.67	1.18	51.85	110.80	-58.95	peak
9	5875.000	49.98	1.23	51.21	105.20	-53.99	peak
10	5925.000	50.47	1.37	51.84	68.20	-16.36	peak
11	6152.800	51.87	2.11	53.98	68.20	-14.22	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

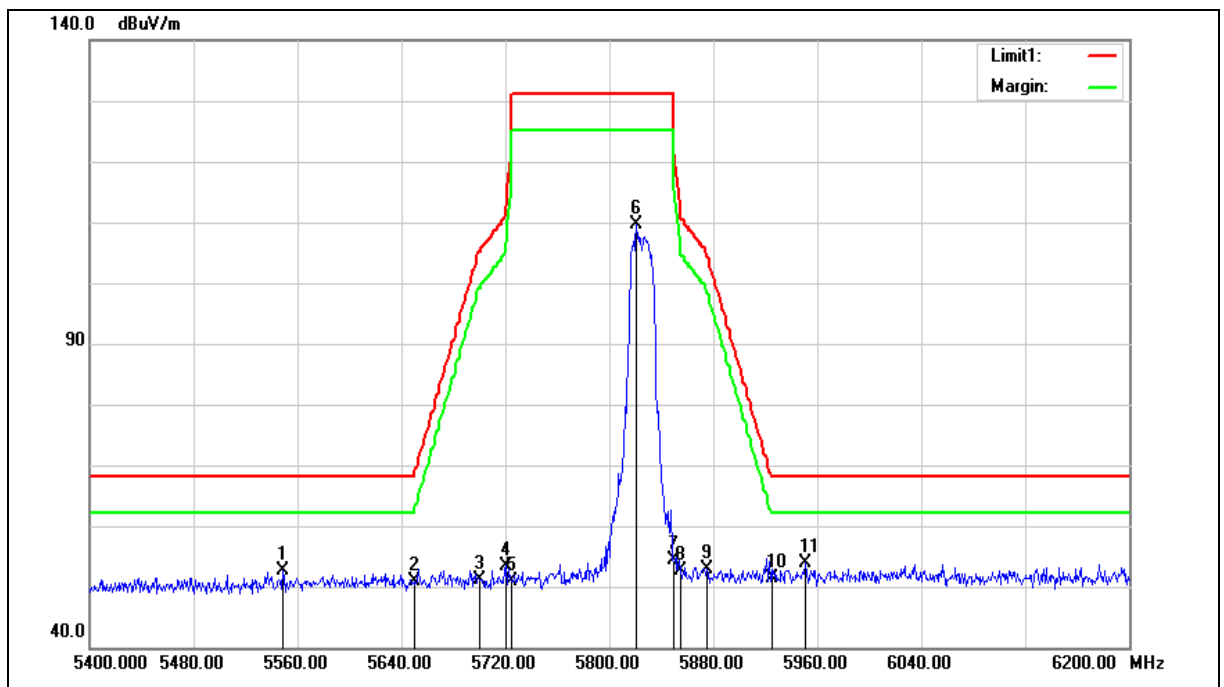

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5548.800	52.29	0.35	52.64	68.20	-15.56	peak
2	5650.000	50.26	0.62	50.88	68.20	-17.32	peak
3	5700.000	50.29	0.75	51.04	105.20	-54.16	peak
4	5720.000	52.69	0.81	53.50	110.80	-57.30	peak
5	5725.000	50.09	0.82	50.91	122.20	-71.29	peak
6	5820.800	108.56	1.08	109.64	--	--	peak
7	5850.000	53.33	1.17	54.50	122.20	-67.70	peak
8	5855.000	51.53	1.18	52.71	110.80	-58.09	peak
9	5875.000	51.66	1.23	52.89	105.20	-52.31	peak
10	5925.000	50.01	1.37	51.38	68.20	-16.82	peak
11	5950.400	52.39	1.44	53.83	68.20	-14.37	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

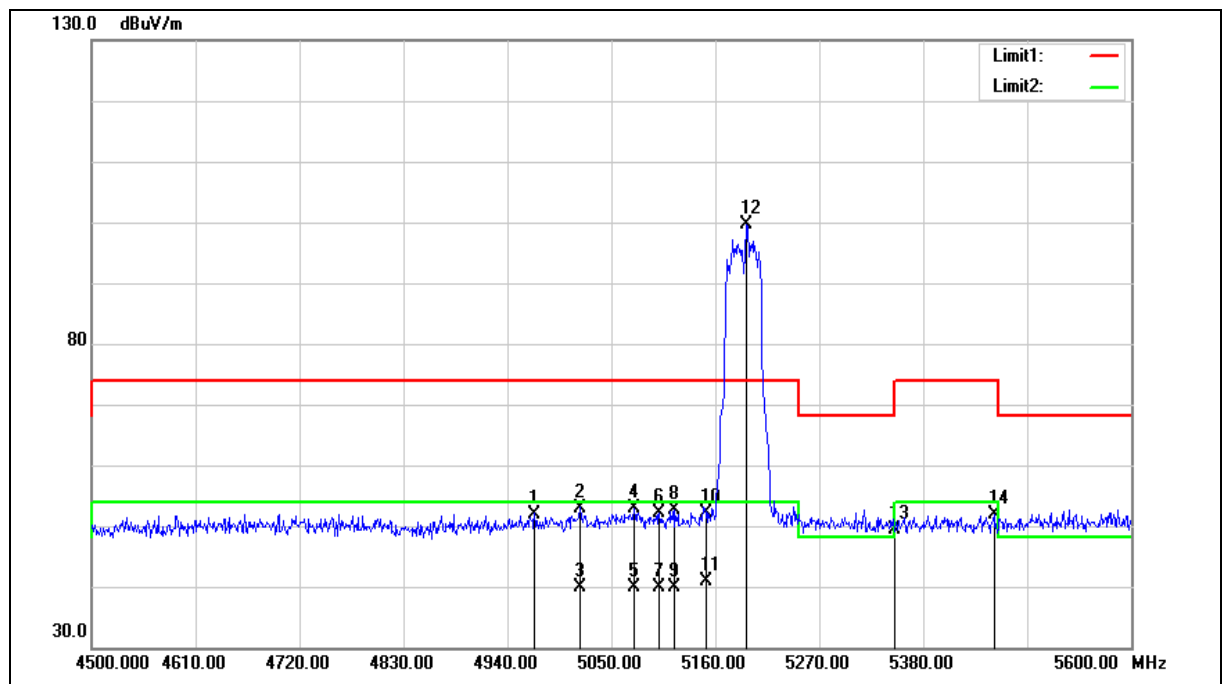

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4968.600	52.86	-0.86	52.00	74.00	-22.00	peak
2	5017.000	53.74	-0.74	53.00	74.00	-21.00	peak
3	5017.000	40.63	-0.74	39.89	54.00	-14.11	AVG
4	5074.200	53.51	-0.62	52.89	74.00	-21.11	peak
5	5074.200	40.49	-0.62	39.87	54.00	-14.13	AVG
6	5100.600	52.66	-0.57	52.09	74.00	-21.91	peak
7	5100.600	40.40	-0.57	39.83	54.00	-14.17	AVG
8	5117.100	53.09	-0.54	52.55	74.00	-21.45	peak
9	5117.100	40.43	-0.54	39.89	54.00	-14.11	AVG
10	5150.000	52.72	-0.48	52.24	74.00	-21.76	peak
11	5150.000	41.38	-0.48	40.90	54.00	-13.10	AVG
12	5193.000	99.98	-0.40	99.58	--	--	peak
13	5350.000	49.49	-0.08	49.41	74.00	-24.59	peak
14	5454.800	51.88	0.12	52.00	74.00	-22.00	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

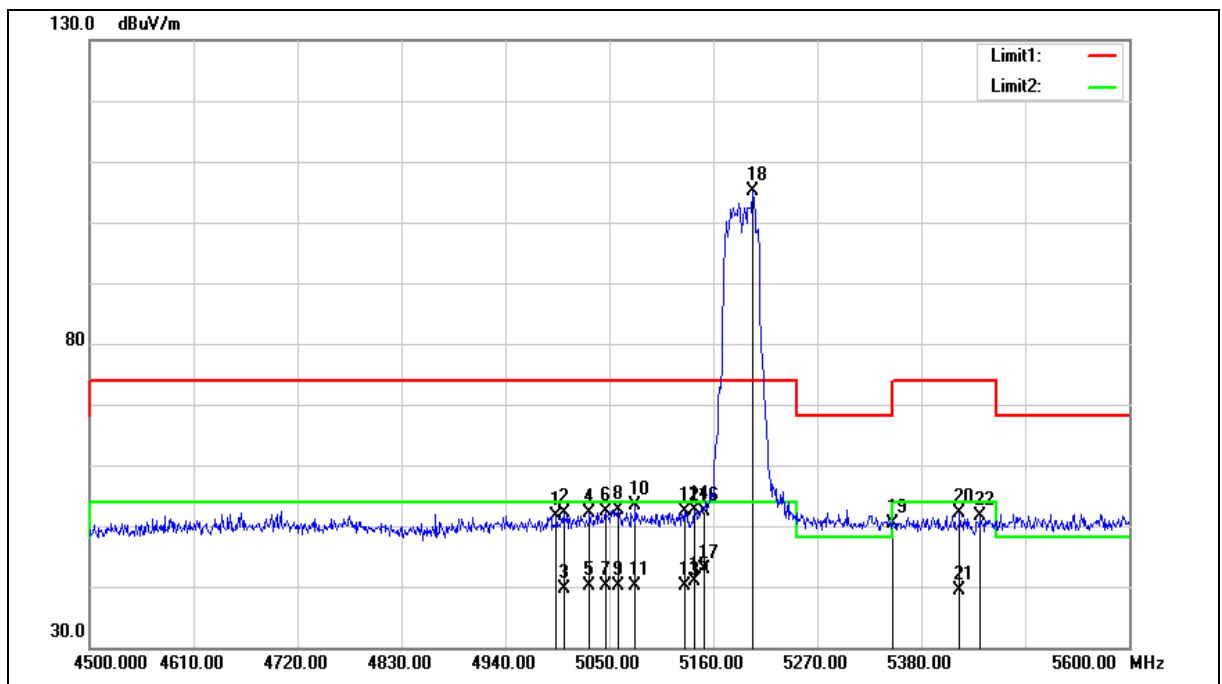

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4993.900	52.40	-0.78	51.62	74.00	-22.38	peak
2	5001.600	52.79	-0.77	52.02	74.00	-21.98	peak
3	5001.600	40.32	-0.77	39.55	54.00	-14.45	AVG
4	5029.100	52.88	-0.72	52.16	74.00	-21.84	peak
5	5029.100	40.77	-0.72	40.05	54.00	-13.95	AVG
6	5045.600	53.06	-0.68	52.38	74.00	-21.62	peak
7	5045.600	40.81	-0.68	40.13	54.00	-13.87	AVG
8	5058.800	53.36	-0.65	52.71	74.00	-21.29	peak
9	5058.800	40.85	-0.65	40.20	54.00	-13.80	AVG
10	5077.500	54.03	-0.62	53.41	74.00	-20.59	peak
11	5077.500	40.78	-0.62	40.16	54.00	-13.84	AVG
12	5129.200	52.81	-0.52	52.29	74.00	-21.71	peak
13	5129.200	40.71	-0.52	40.19	54.00	-13.81	AVG
14	5140.200	53.01	-0.49	52.52	74.00	-21.48	peak
15	5140.200	41.47	-0.49	40.98	54.00	-13.02	AVG
16	5150.000	52.98	-0.48	52.50	74.00	-21.50	peak
17	5150.000	43.31	-0.48	42.83	54.00	-11.17	AVG
18	5201.800	105.62	-0.37	105.25	--	--	peak
19	5350.000	50.35	-0.08	50.27	74.00	-23.73	peak
20	5420.700	52.07	0.06	52.13	74.00	-21.87	peak
21	5420.700	39.42	0.06	39.48	54.00	-14.52	AVG
22	5442.700	51.45	0.10	51.55	74.00	-22.45	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

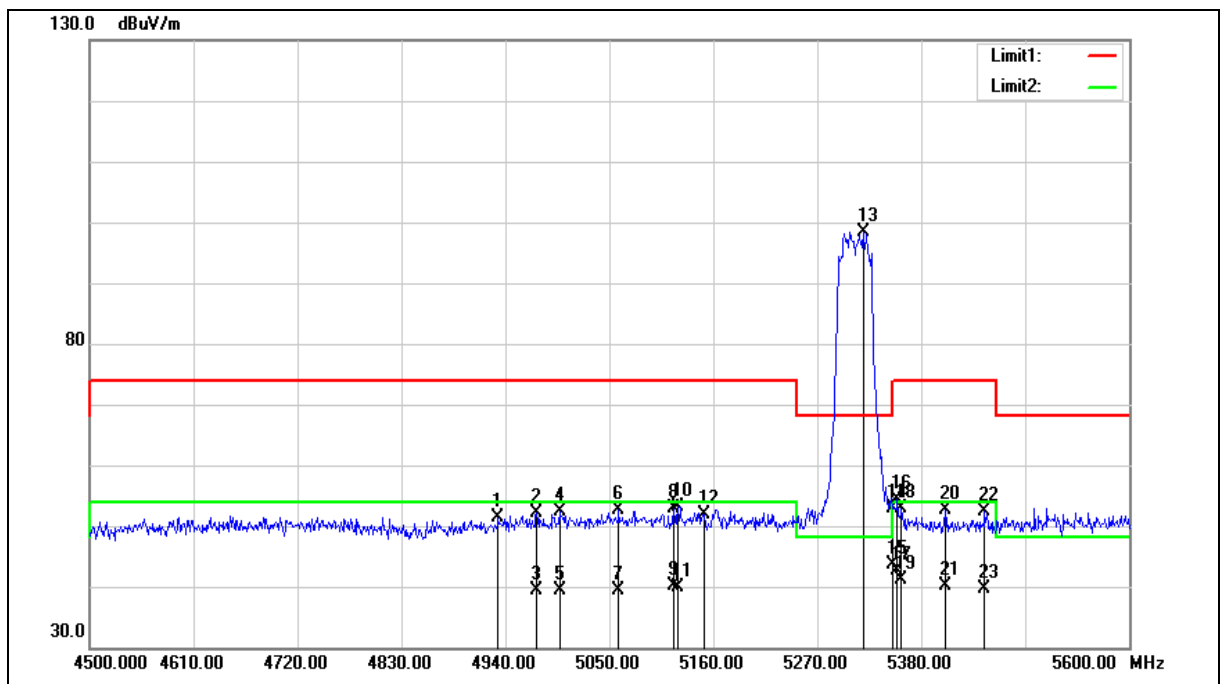

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4932.300	52.41	-0.95	51.46	74.00	-22.54	peak
2	4973.000	52.87	-0.84	52.03	74.00	-21.97	peak
3	4973.000	40.16	-0.84	39.32	54.00	-14.68	AVG
4	4997.200	53.14	-0.78	52.36	74.00	-21.64	peak
5	4997.200	40.28	-0.78	39.50	54.00	-14.50	AVG
6	5059.900	53.24	-0.65	52.59	74.00	-21.41	peak
7	5059.900	40.12	-0.65	39.47	54.00	-14.53	AVG
8	5118.200	53.45	-0.54	52.91	74.00	-21.09	peak
9	5118.200	40.66	-0.54	40.12	54.00	-13.88	AVG
10	5122.600	53.69	-0.53	53.16	74.00	-20.84	peak
11	5122.600	40.40	-0.53	39.87	54.00	-14.13	AVG
12	5150.000	52.29	-0.48	51.81	74.00	-22.19	peak
13	5318.400	98.65	-0.15	98.50	--	--	peak
14	5350.000	52.99	-0.08	52.91	74.00	-21.09	peak
15	5350.000	43.77	-0.08	43.69	54.00	-10.31	AVG
16	5354.700	54.46	-0.08	54.38	74.00	-19.62	peak
17	5354.700	42.71	-0.08	42.63	54.00	-11.37	AVG
18	5359.100	53.05	-0.06	52.99	74.00	-21.01	peak
19	5359.100	41.21	-0.06	41.15	54.00	-12.85	AVG
20	5405.300	52.53	0.02	52.55	74.00	-21.45	peak
21	5405.300	40.06	0.02	40.08	54.00	-13.92	AVG
22	5447.100	52.21	0.11	52.32	74.00	-21.68	peak
23	5447.100	39.56	0.11	39.67	54.00	-14.33	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

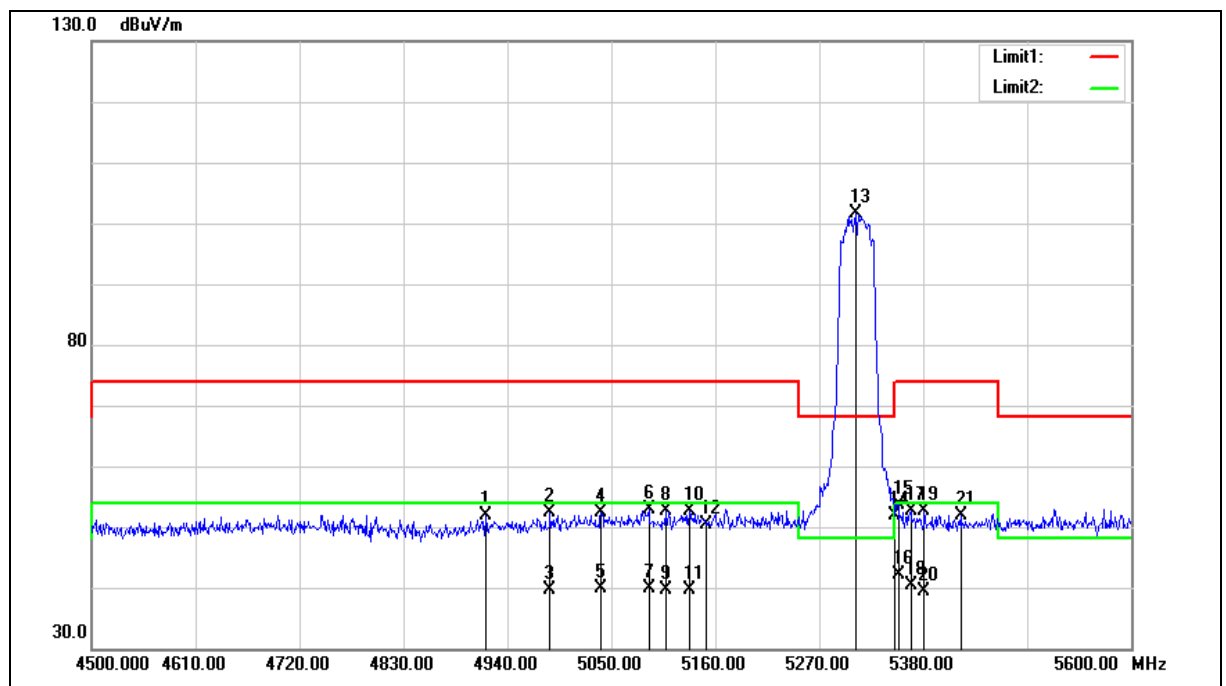

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4916.900	52.83	-1.00	51.83	74.00	-22.17	peak
2	4985.100	53.23	-0.82	52.41	74.00	-21.59	peak
3	4985.100	40.50	-0.82	39.68	54.00	-14.32	AVG
4	5039.000	53.15	-0.69	52.46	74.00	-21.54	peak
5	5039.000	40.62	-0.69	39.93	54.00	-14.07	AVG
6	5089.600	53.43	-0.60	52.83	74.00	-21.17	peak
7	5089.600	40.54	-0.60	39.94	54.00	-14.06	AVG
8	5107.200	53.11	-0.56	52.55	74.00	-21.45	peak
9	5107.200	40.30	-0.56	39.74	54.00	-14.26	AVG
10	5132.500	53.14	-0.51	52.63	74.00	-21.37	peak
11	5132.500	40.05	-0.51	39.54	54.00	-14.46	AVG
12	5150.000	50.97	-0.48	50.49	74.00	-23.51	peak
13	5308.500	101.85	-0.16	101.69	--	--	peak
14	5350.000	52.03	-0.08	51.95	74.00	-22.05	peak
15	5353.600	53.73	-0.08	53.65	74.00	-20.35	peak
16	5353.600	42.28	-0.08	42.20	54.00	-11.80	AVG
17	5366.800	52.56	-0.05	52.51	74.00	-21.49	peak
18	5366.800	40.41	-0.05	40.36	54.00	-13.64	AVG
19	5381.100	52.58	-0.03	52.55	74.00	-21.45	peak
20	5381.100	39.39	-0.03	39.36	54.00	-14.64	AVG
21	5419.600	51.82	0.06	51.88	74.00	-22.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

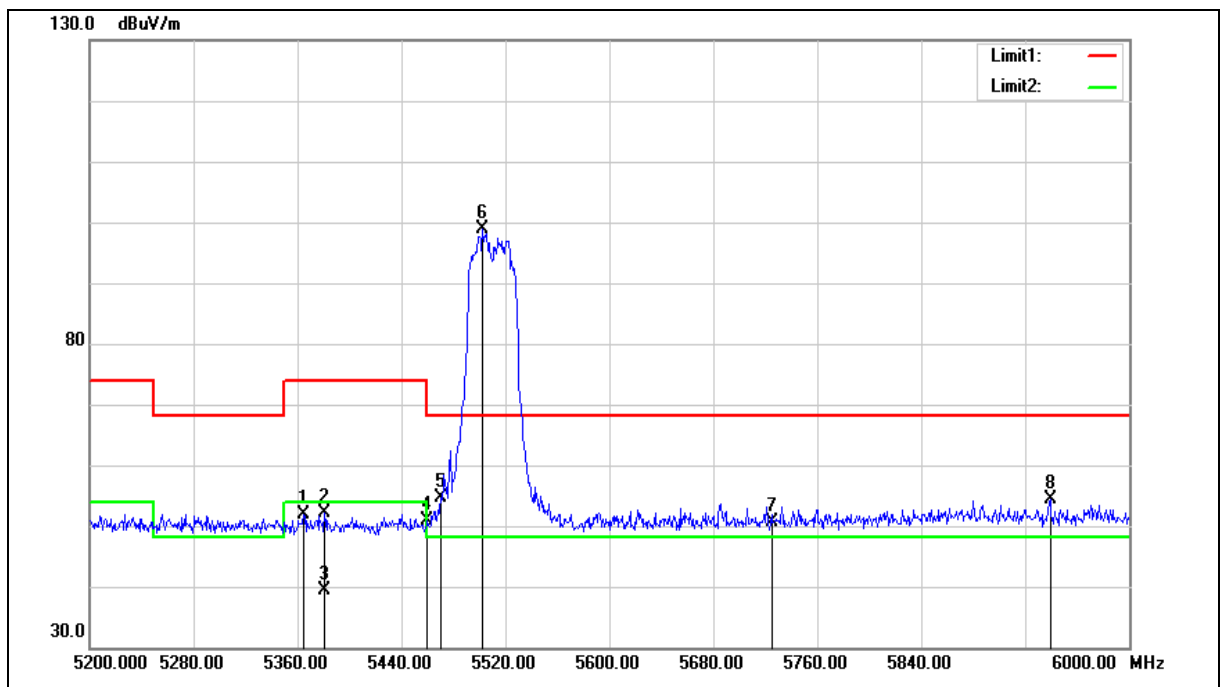

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5364.800	51.99	-0.05	51.94	74.00	-22.06	peak
2	5380.800	52.26	-0.03	52.23	74.00	-21.77	peak
3	5380.800	39.48	-0.03	39.45	54.00	-14.55	AVG
4	5460.000	50.64	0.14	50.78	74.00	-23.22	peak
5	5470.000	54.51	0.16	54.67	68.20	-13.53	peak
6	5502.400	98.73	0.22	98.95	--	--	peak
7	5725.000	49.74	0.82	50.56	68.20	-17.64	peak
8	5939.200	53.05	1.40	54.45	68.20	-13.75	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

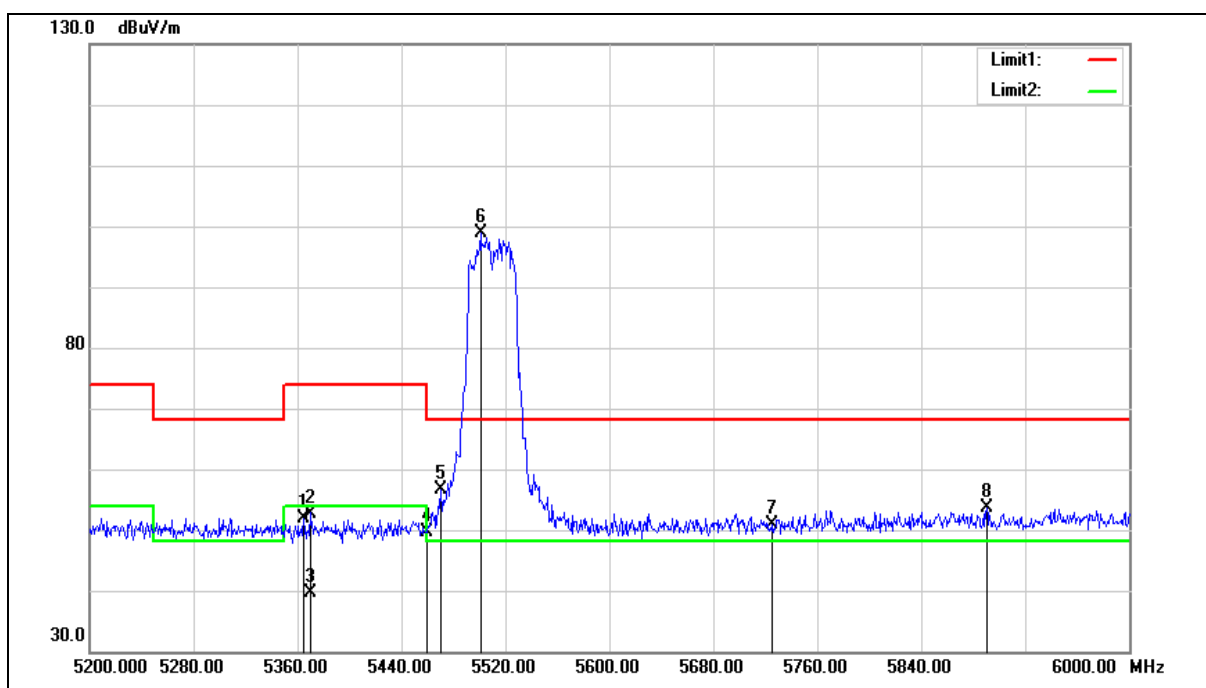


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5364.800	52.00	-0.05	51.95	74.00	-22.05	peak
2	5369.600	52.78	-0.03	52.75	74.00	-21.25	peak
3	5369.600	39.77	-0.03	39.74	54.00	-14.26	AVG
4	5460.000	49.48	0.14	49.62	74.00	-24.38	peak
5	5470.000	56.58	0.16	56.74	68.20	-11.46	peak
6	5500.800	98.63	0.22	98.85	--	--	peak
7	5725.000	50.15	0.82	50.97	68.20	-17.23	peak
8	5890.400	52.37	1.26	53.63	68.20	-14.57	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

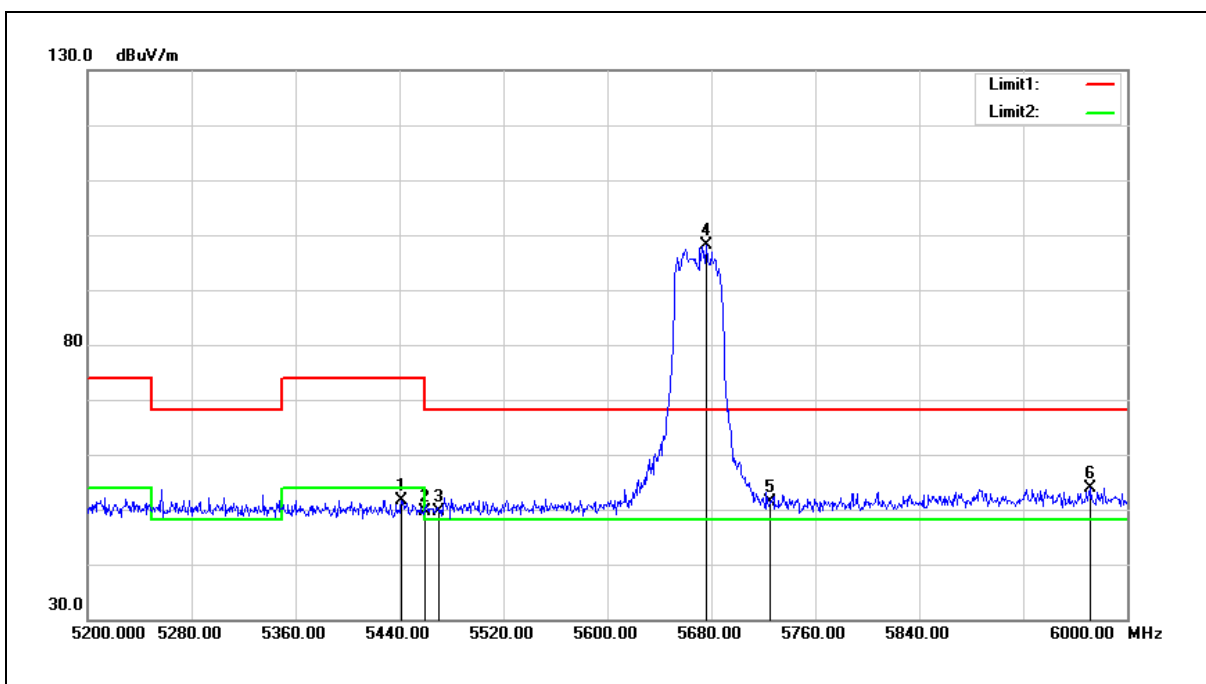


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5441.600	51.52	0.09	51.61	74.00	-22.39	peak
2	5460.000	49.54	0.14	49.68	74.00	-24.32	peak
3	5470.000	49.46	0.16	49.62	68.20	-18.58	peak
4	5676.000	97.34	0.69	98.03	--	--	peak
5	5725.000	50.63	0.82	51.45	68.20	-16.75	peak
6	5972.000	52.44	1.50	53.94	68.20	-14.26	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

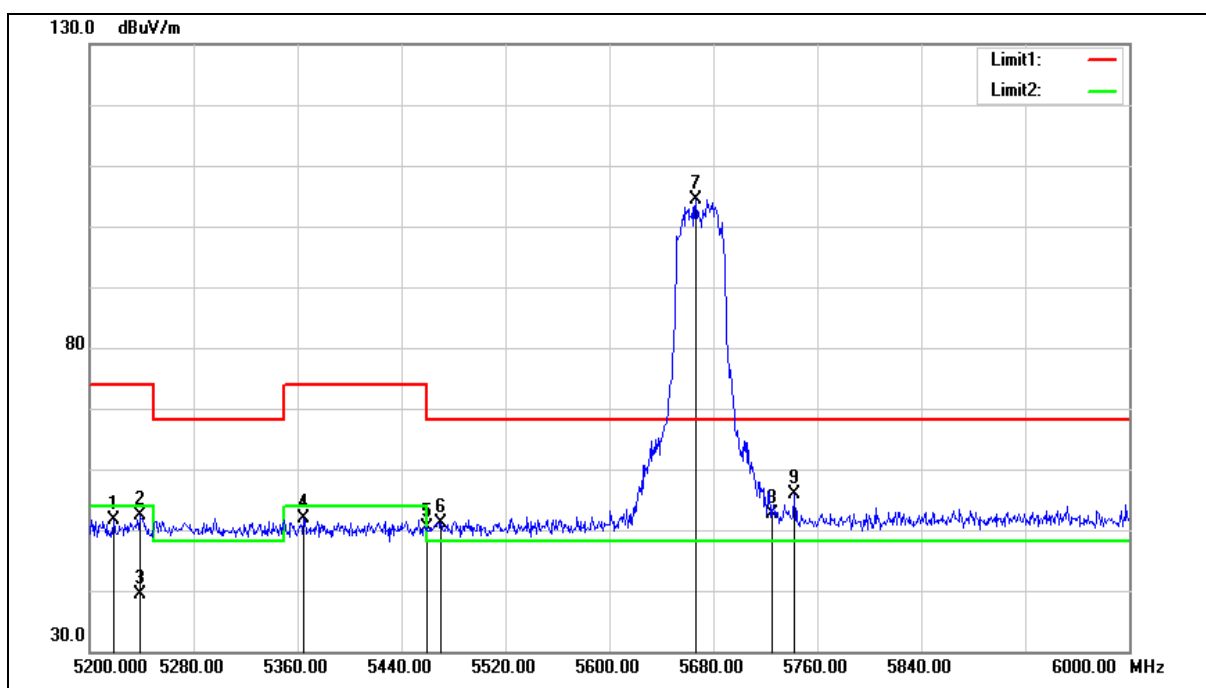


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5218.400	52.06	-0.35	51.71	74.00	-22.29	peak
2	5238.400	52.65	-0.31	52.34	74.00	-21.66	peak
3	5238.400	39.67	-0.31	39.36	54.00	-14.64	AVG
4	5364.800	51.83	-0.05	51.78	74.00	-22.22	peak
5	5460.000	50.12	0.14	50.26	74.00	-23.74	peak
6	5470.000	50.91	0.16	51.07	68.20	-17.13	peak
7	5666.400	103.76	0.67	104.43	--	--	peak
8	5725.000	51.88	0.82	52.70	68.20	-15.50	peak
9	5742.400	54.96	0.87	55.83	68.20	-12.37	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

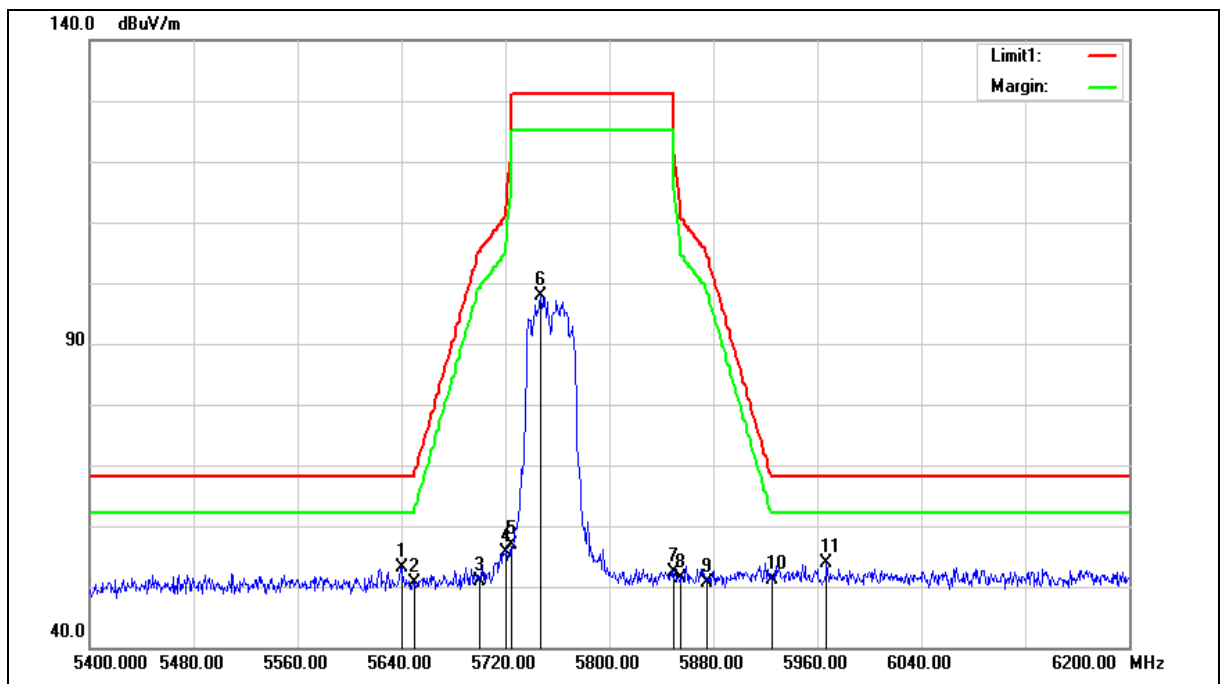

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5640.000	52.63	0.59	53.22	68.20	-14.98	peak
2	5650.000	50.04	0.62	50.66	68.20	-17.54	peak
3	5700.000	50.25	0.75	51.00	105.20	-54.20	peak
4	5720.000	54.75	0.81	55.56	110.80	-55.24	peak
5	5725.000	55.95	0.82	56.77	122.20	-65.43	peak
6	5747.200	96.90	0.89	97.79	--	--	peak
7	5850.000	51.28	1.17	52.45	122.20	-69.75	peak
8	5855.000	50.11	1.18	51.29	110.80	-59.51	peak
9	5875.000	49.50	1.23	50.73	105.20	-54.47	peak
10	5925.000	49.78	1.37	51.15	68.20	-17.05	peak
11	5967.200	52.50	1.49	53.99	68.20	-14.21	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

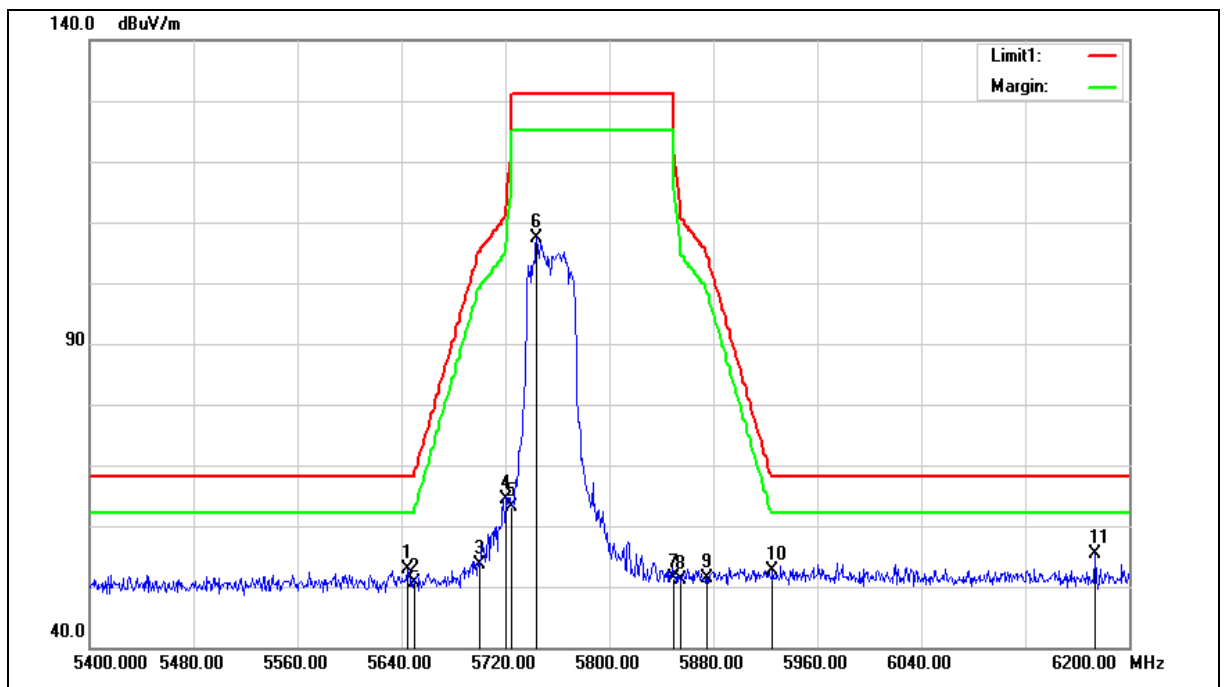

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5644.800	52.30	0.60	52.90	68.20	-15.30	peak
2	5650.000	50.01	0.62	50.63	68.20	-17.57	peak
3	5700.000	52.90	0.75	53.65	105.20	-51.55	peak
4	5720.000	63.53	0.81	64.34	110.80	-46.46	peak
5	5725.000	62.36	0.82	63.18	122.20	-59.02	peak
6	5744.000	106.62	0.87	107.49	--	--	peak
7	5850.000	50.23	1.17	51.40	122.20	-70.80	peak
8	5855.000	49.93	1.18	51.11	110.80	-59.69	peak
9	5875.000	50.22	1.23	51.45	105.20	-53.75	peak
10	5925.000	51.15	1.37	52.52	68.20	-15.68	peak
11	6173.600	53.08	2.18	55.26	68.20	-12.94	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

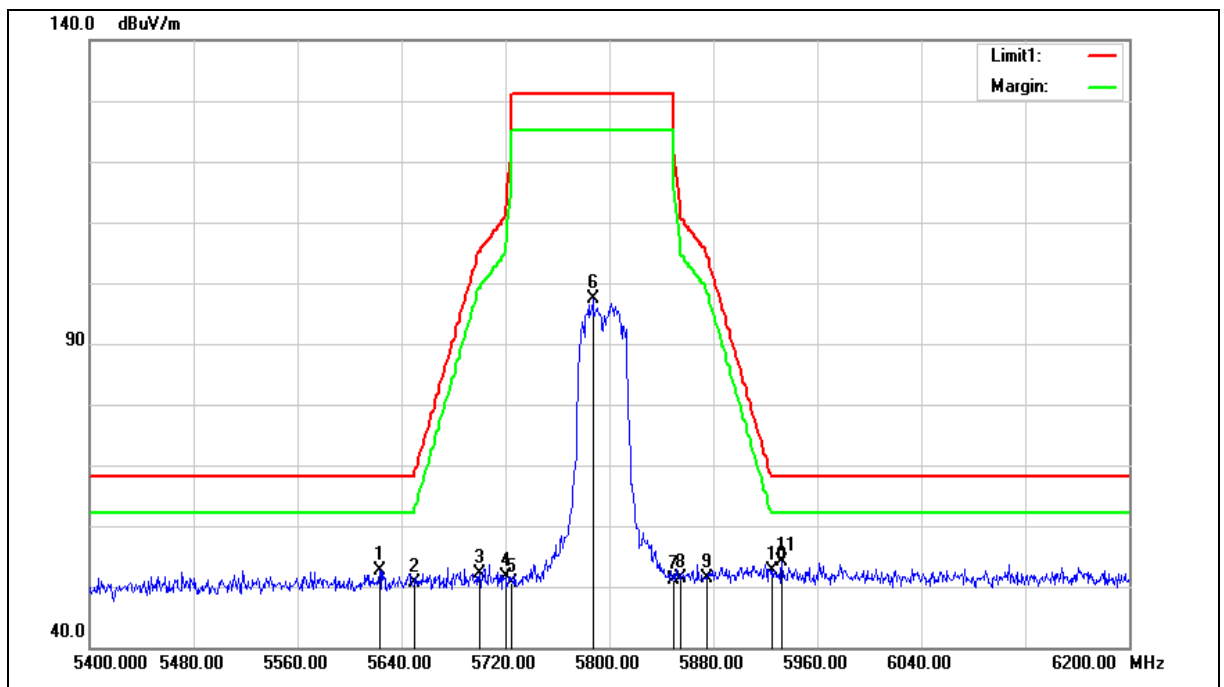

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5623.200	52.19	0.55	52.74	68.20	-15.46	peak
2	5650.000	50.01	0.62	50.63	68.20	-17.57	peak
3	5700.000	51.34	0.75	52.09	105.20	-53.11	peak
4	5720.000	50.79	0.81	51.60	110.80	-59.20	peak
5	5725.000	49.75	0.82	50.57	122.20	-71.63	peak
6	5787.200	96.32	0.99	97.31	--	--	peak
7	5850.000	50.01	1.17	51.18	122.20	-71.02	peak
8	5855.000	50.10	1.18	51.28	110.80	-59.52	peak
9	5875.000	50.19	1.23	51.42	105.20	-53.78	peak
10	5925.000	51.23	1.37	52.60	68.20	-15.60	peak
11	5932.800	52.65	1.38	54.03	68.20	-14.17	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

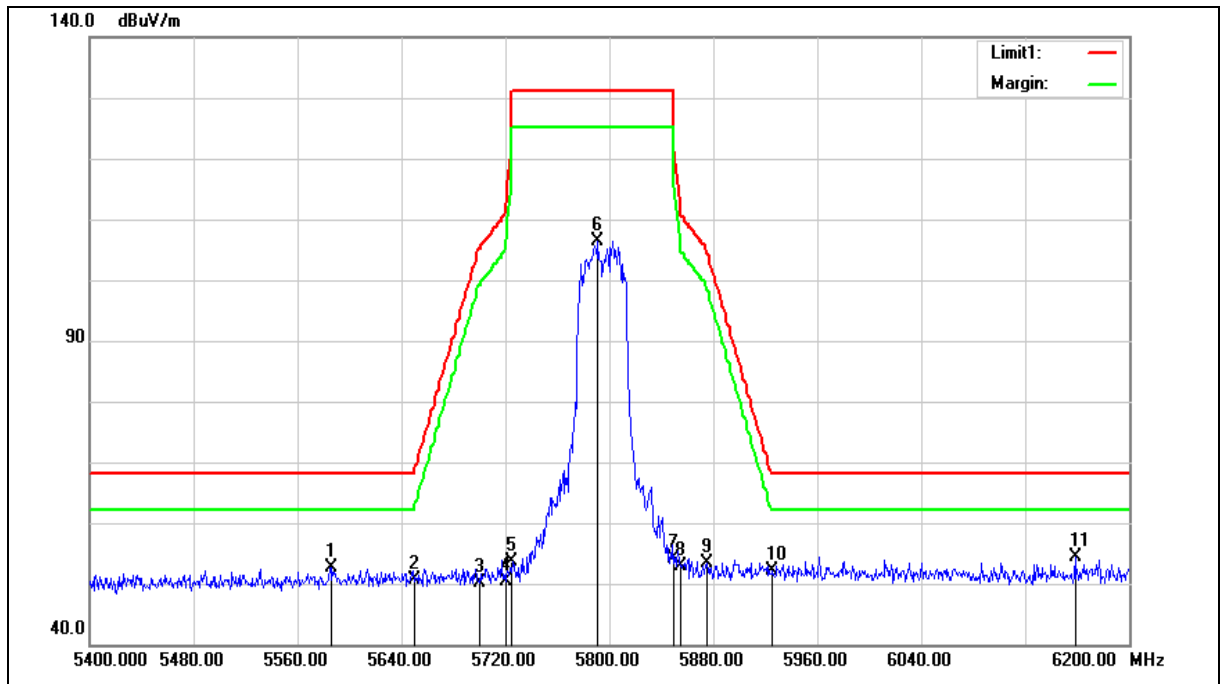

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5585.600	52.27	0.45	52.72	68.20	-15.48	peak
2	5650.000	50.04	0.62	50.66	68.20	-17.54	peak
3	5700.000	49.37	0.75	50.12	105.20	-55.08	peak
4	5720.000	49.64	0.81	50.45	110.80	-60.35	peak
5	5725.000	52.85	0.82	53.67	122.20	-68.53	peak
6	5791.200	105.49	1.01	106.50	--	--	peak
7	5850.000	52.84	1.17	54.01	122.20	-68.19	peak
8	5855.000	51.78	1.18	52.96	110.80	-57.84	peak
9	5875.000	52.19	1.23	53.42	105.20	-51.78	peak
10	5925.000	50.67	1.37	52.04	68.20	-16.16	peak
11	6158.400	52.30	2.14	54.44	68.20	-13.76	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

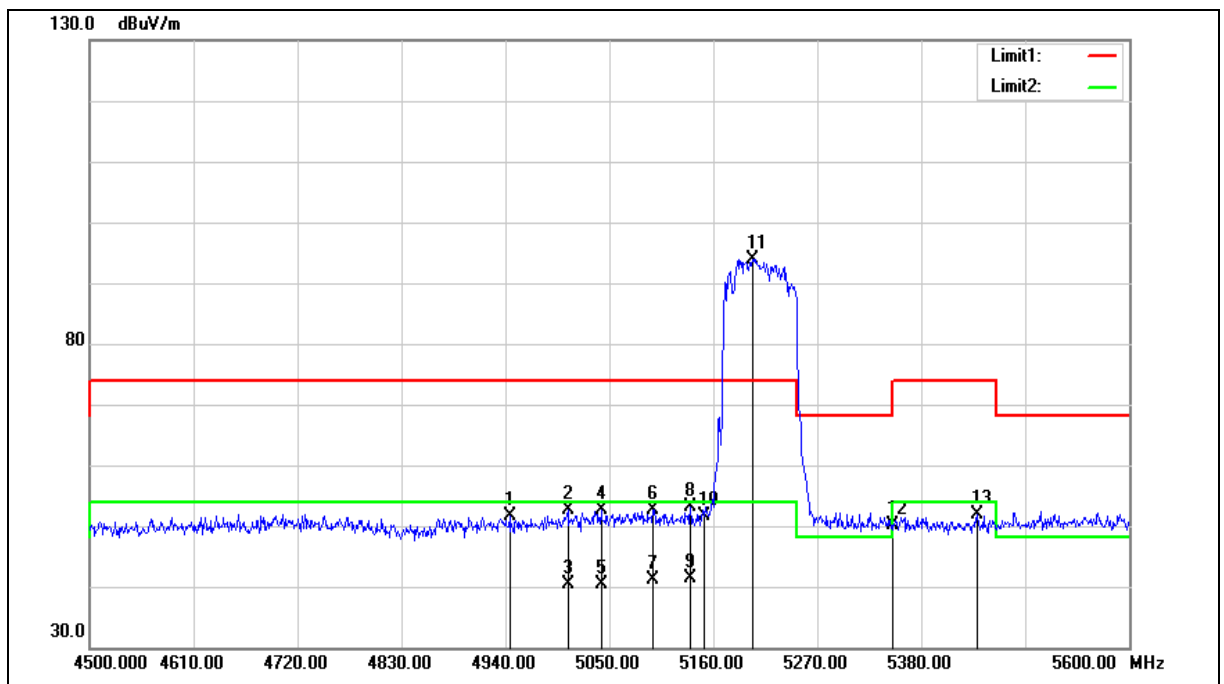

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4944.400	52.55	-0.93	51.62	74.00	-22.38	peak
2	5006.000	53.52	-0.77	52.75	74.00	-21.25	peak
3	5006.000	41.13	-0.77	40.36	54.00	-13.64	AVG
4	5041.200	53.32	-0.69	52.63	74.00	-21.37	peak
5	5041.200	40.96	-0.69	40.27	54.00	-13.73	AVG
6	5096.200	53.22	-0.57	52.65	74.00	-21.35	peak
7	5096.200	41.58	-0.57	41.01	54.00	-12.99	AVG
8	5135.800	53.63	-0.50	53.13	74.00	-20.87	peak
9	5135.800	41.94	-0.50	41.44	54.00	-12.56	AVG
10	5150.000	52.01	-0.48	51.53	74.00	-22.47	peak
11	5201.800	94.36	-0.37	93.99	--	--	peak
12	5350.000	50.11	-0.08	50.03	74.00	-23.97	peak
13	5439.400	51.80	0.09	51.89	74.00	-22.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

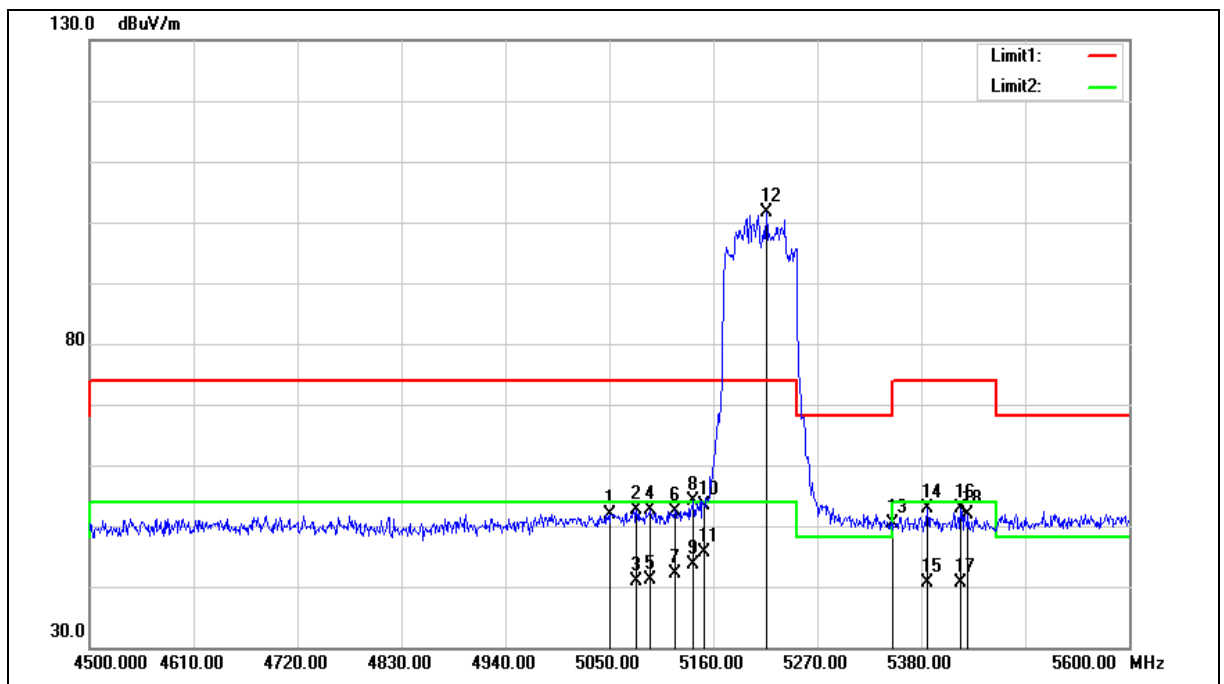

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5051.100	52.50	-0.67	51.83	74.00	-22.17	peak
2	5078.600	53.30	-0.62	52.68	74.00	-21.32	peak
3	5078.600	41.53	-0.62	40.91	54.00	-13.09	AVG
4	5092.900	53.28	-0.60	52.68	74.00	-21.32	peak
5	5092.900	41.81	-0.60	41.21	54.00	-12.79	AVG
6	5119.300	53.03	-0.53	52.50	74.00	-21.50	peak
7	5119.300	42.75	-0.53	42.22	54.00	-11.78	AVG
8	5139.100	54.67	-0.49	54.18	74.00	-19.82	peak
9	5139.100	44.20	-0.49	43.71	54.00	-10.29	AVG
10	5150.000	53.74	-0.48	53.26	74.00	-20.74	peak
11	5150.000	46.04	-0.48	45.56	54.00	-8.44	AVG
12	5216.100	101.96	-0.35	101.61	--	--	peak
13	5350.000	50.49	-0.08	50.41	74.00	-23.59	peak
14	5386.600	52.85	0.00	52.85	74.00	-21.15	peak
15	5386.600	40.53	0.00	40.53	54.00	-13.47	AVG
16	5421.800	52.78	0.06	52.84	74.00	-21.16	peak
17	5421.800	40.56	0.06	40.62	54.00	-13.38	AVG
18	5429.500	51.71	0.08	51.79	74.00	-22.21	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

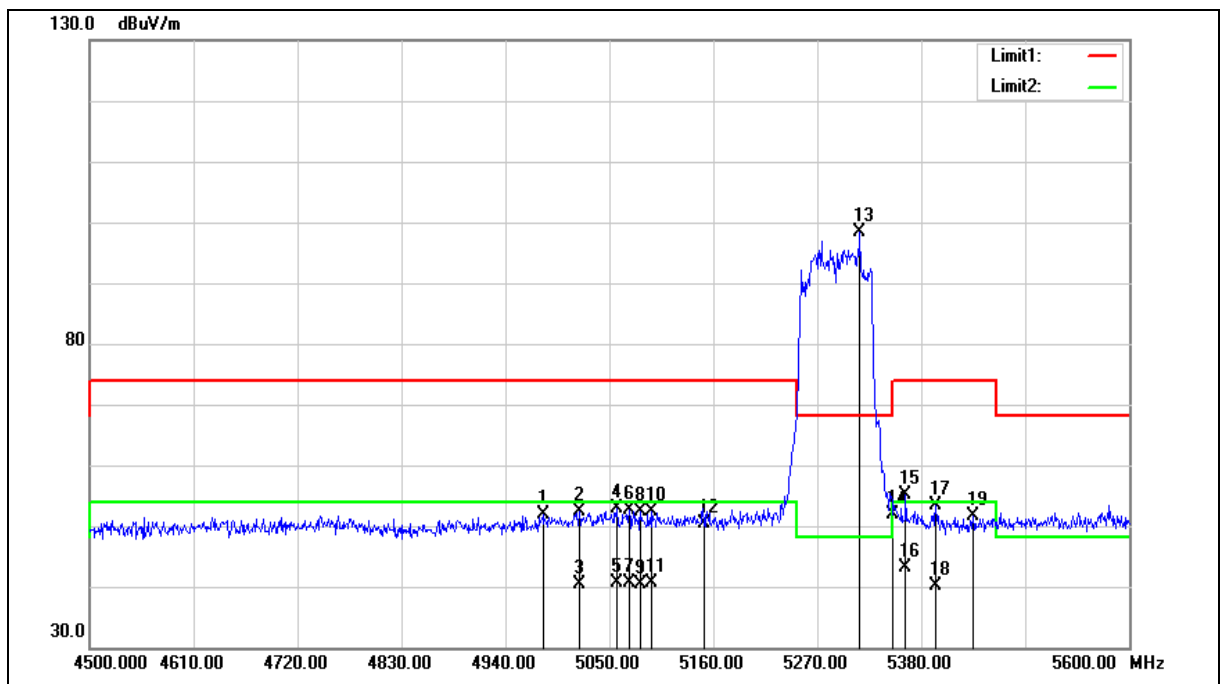

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4979.600	52.81	-0.83	51.98	74.00	-22.02	peak
2	5018.100	53.08	-0.74	52.34	74.00	-21.66	peak
3	5018.100	41.10	-0.74	40.36	54.00	-13.64	AVG
4	5057.700	53.47	-0.65	52.82	74.00	-21.18	peak
5	5057.700	41.22	-0.65	40.57	54.00	-13.43	AVG
6	5070.900	53.33	-0.63	52.70	74.00	-21.30	peak
7	5070.900	41.35	-0.63	40.72	54.00	-13.28	AVG
8	5083.000	53.03	-0.60	52.43	74.00	-21.57	peak
9	5083.000	41.07	-0.60	40.47	54.00	-13.53	AVG
10	5094.000	52.87	-0.58	52.29	74.00	-21.71	peak
11	5094.000	41.14	-0.58	40.56	54.00	-13.44	AVG
12	5150.000	50.77	-0.48	50.29	74.00	-23.71	peak
13	5315.100	98.41	-0.15	98.26	--	--	peak
14	5350.000	51.85	-0.08	51.77	74.00	-22.23	peak
15	5363.500	55.24	-0.06	55.18	74.00	-18.82	peak
16	5363.500	43.21	-0.06	43.15	54.00	-10.85	AVG
17	5395.400	53.40	0.01	53.41	74.00	-20.59	peak
18	5395.400	40.24	0.01	40.25	54.00	-13.75	AVG
19	5435.000	51.43	0.09	51.52	74.00	-22.48	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

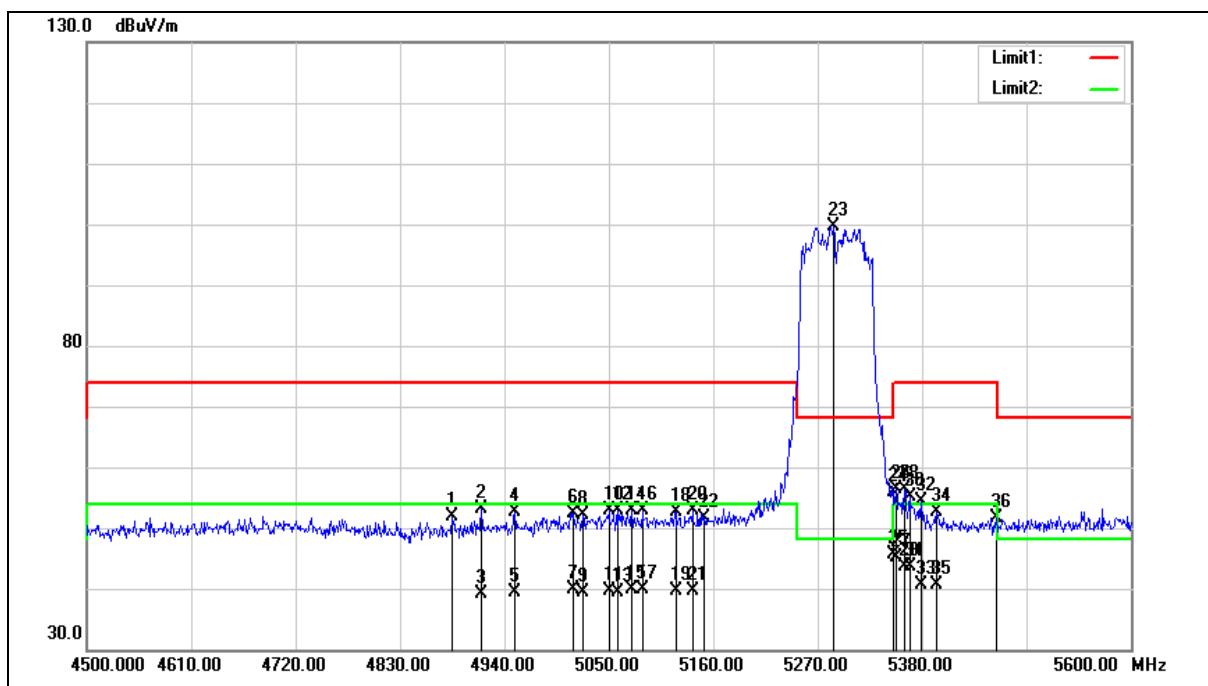

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4885.000	52.92	-1.09	51.83	74.00	-22.17	peak
2	4915.800	54.13	-1.00	53.13	74.00	-20.87	peak
3	4915.800	40.19	-1.00	39.19	54.00	-14.81	AVG
4	4951.000	53.48	-0.90	52.58	74.00	-21.42	peak
5	4951.000	40.28	-0.90	39.38	54.00	-14.62	AVG
6	5012.600	53.13	-0.74	52.39	74.00	-21.61	peak
7	5012.600	40.54	-0.74	39.80	54.00	-14.20	AVG
8	5022.500	52.84	-0.72	52.12	74.00	-21.88	peak
9	5022.500	40.13	-0.72	39.41	54.00	-14.59	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10	5050.000	53.50	-0.68	52.82	74.00	-21.18	peak
11	5050.000	40.43	-0.68	39.75	54.00	-14.25	AVG
12	5058.800	53.42	-0.65	52.77	74.00	-21.23	peak
13	5058.800	40.08	-0.65	39.43	54.00	-14.57	AVG
14	5074.200	53.60	-0.62	52.98	74.00	-21.02	peak
15	5074.200	40.44	-0.62	39.82	54.00	-14.18	AVG
16	5085.200	53.51	-0.60	52.91	74.00	-21.09	peak
17	5085.200	40.40	-0.60	39.80	54.00	-14.20	AVG
18	5120.400	53.15	-0.53	52.62	74.00	-21.38	peak
19	5120.400	40.11	-0.53	39.58	54.00	-14.42	AVG
20	5138.000	53.29	-0.49	52.80	74.00	-21.20	peak
21	5138.000	40.13	-0.49	39.64	54.00	-14.36	AVG
22	5150.000	52.21	-0.48	51.73	74.00	-22.27	peak
23	5286.500	99.80	-0.20	99.60	--	--	peak
24	5350.000	55.98	-0.08	55.90	74.00	-18.10	peak
25	5350.000	45.80	-0.08	45.72	54.00	-8.28	AVG
26	5352.500	56.53	-0.08	56.45	74.00	-17.55	peak
27	5352.500	45.30	-0.08	45.22	54.00	-8.78	AVG
28	5361.300	56.35	-0.06	56.29	74.00	-17.71	peak
29	5361.300	43.62	-0.06	43.56	54.00	-10.44	AVG
30	5366.800	55.12	-0.05	55.07	74.00	-18.93	peak
31	5366.800	43.60	-0.05	43.55	54.00	-10.45	AVG
32	5378.900	54.51	-0.03	54.48	74.00	-19.52	peak
33	5378.900	40.57	-0.03	40.54	54.00	-13.46	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
34	5395.400	52.68	0.01	52.69	74.00	-21.31	peak
35	5395.400	40.55	0.01	40.56	54.00	-13.44	AVG
36	5458.100	51.54	0.14	51.68	74.00	-22.32	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

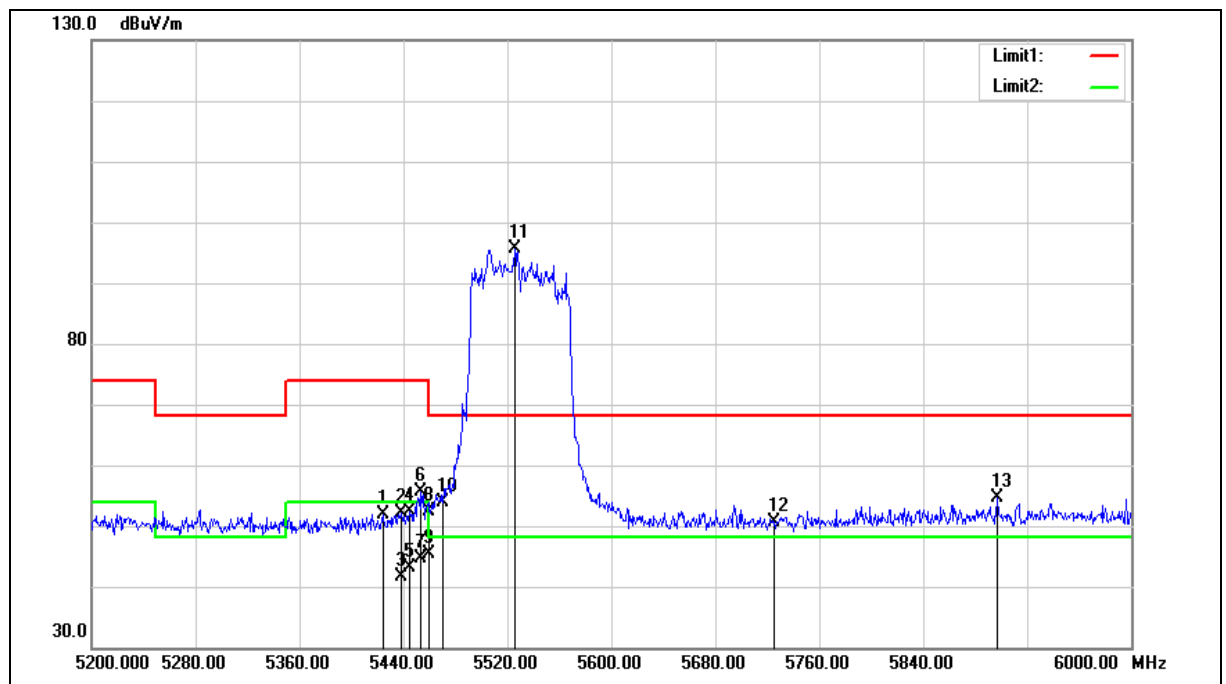

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5424.000	51.80	0.06	51.86	74.00	-22.14	peak
2	5438.400	51.97	0.09	52.06	74.00	-21.94	peak
3	5438.400	41.61	0.09	41.70	54.00	-12.30	AVG
4	5444.800	52.16	0.11	52.27	74.00	-21.73	peak
5	5444.800	43.02	0.11	43.13	54.00	-10.87	AVG
6	5452.800	55.43	0.12	55.55	74.00	-18.45	peak
7	5452.800	44.45	0.12	44.57	54.00	-9.43	AVG
8	5460.000	52.36	0.14	52.50	74.00	-21.50	peak
9	5460.000	45.30	0.14	45.44	54.00	-8.56	AVG
10	5470.000	53.69	0.16	53.85	68.20	-14.35	peak
11	5525.600	95.34	0.28	95.62	--	--	peak
12	5725.000	49.77	0.82	50.59	68.20	-17.61	peak
13	5896.800	53.29	1.29	54.58	68.20	-13.62	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

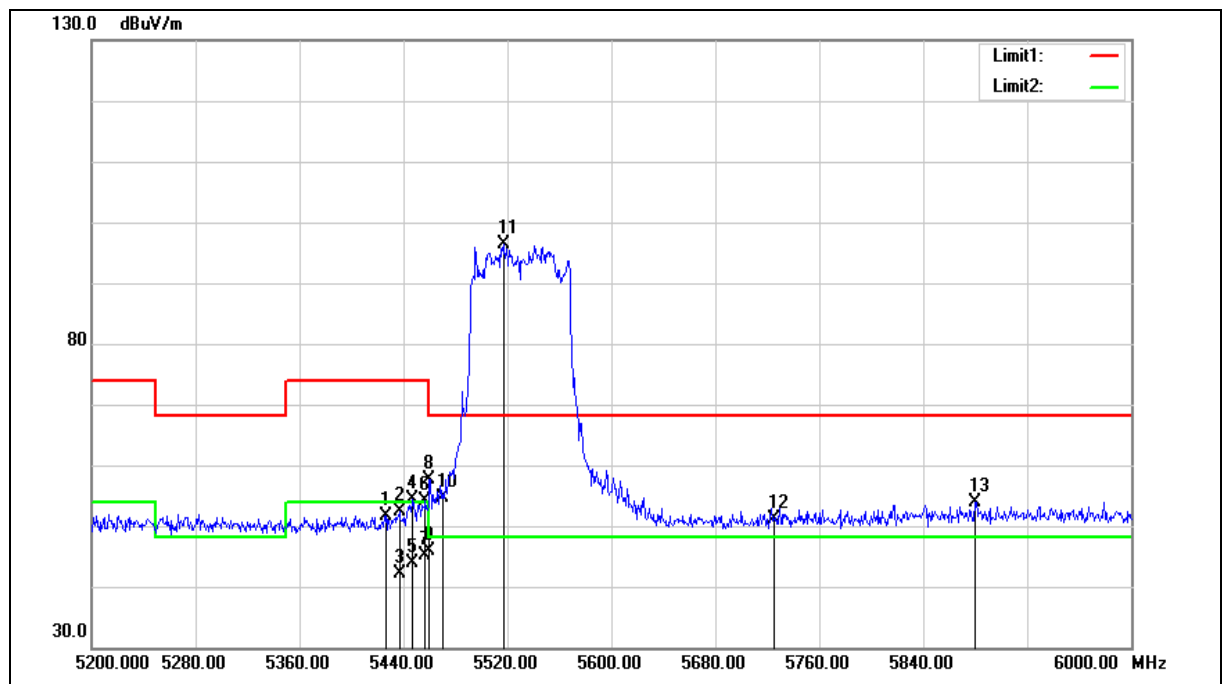

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5426.400	51.68	0.06	51.74	74.00	-22.26	peak
2	5436.800	52.32	0.09	52.41	74.00	-21.59	peak
3	5436.800	42.04	0.09	42.13	54.00	-11.87	AVG
4	5447.200	54.27	0.11	54.38	74.00	-19.62	peak
5	5447.200	43.84	0.11	43.95	54.00	-10.05	AVG
6	5456.800	53.94	0.14	54.08	74.00	-19.92	peak
7	5456.800	45.11	0.14	45.25	54.00	-8.75	AVG
8	5460.000	57.56	0.14	57.70	74.00	-16.30	peak
9	5460.000	45.72	0.14	45.86	54.00	-8.14	AVG
10	5470.000	54.39	0.16	54.55	68.20	-13.65	peak
11	5516.800	96.00	0.27	96.27	--	--	peak
12	5725.000	50.40	0.82	51.22	68.20	-16.98	peak
13	5880.000	52.70	1.25	53.95	68.20	-14.25	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

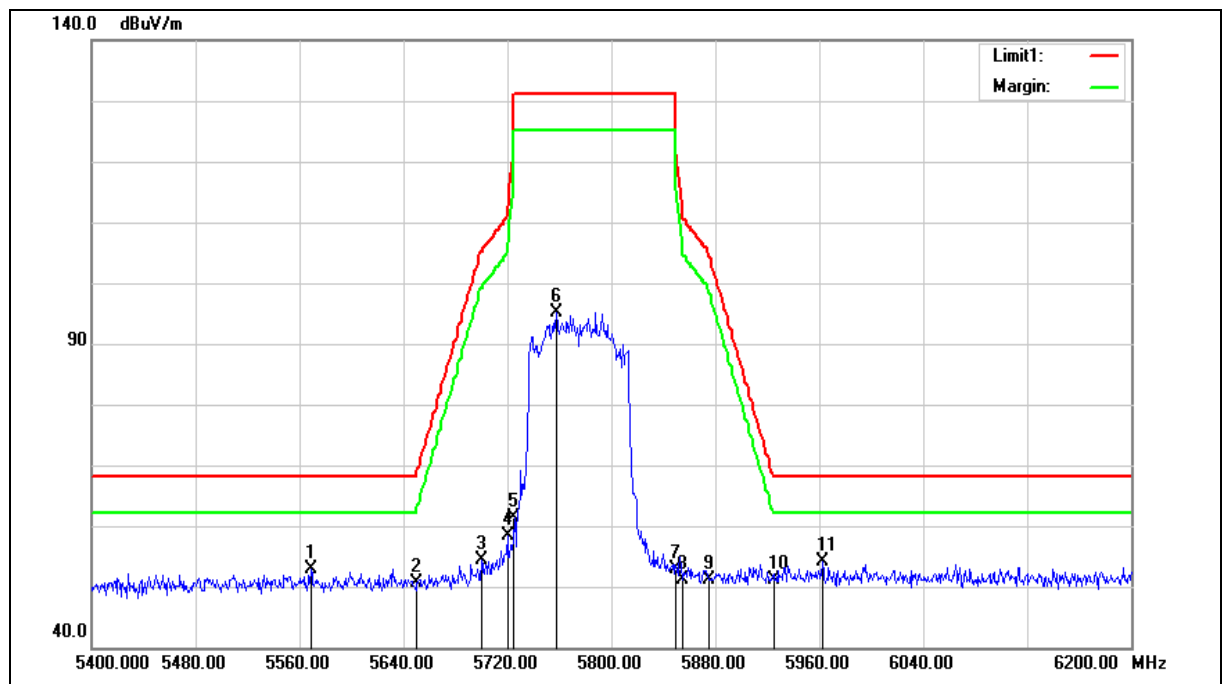

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5568.800	52.57	0.40	52.97	68.20	-15.23	peak
2	5650.000	50.10	0.62	50.72	68.20	-17.48	peak
3	5700.000	53.61	0.75	54.36	105.20	-50.84	peak
4	5720.000	57.69	0.81	58.50	110.80	-52.30	peak
5	5725.000	60.46	0.82	61.28	122.20	-60.92	peak
6	5757.600	94.21	0.91	95.12	--	--	peak
7	5850.000	51.80	1.17	52.97	122.20	-69.23	peak
8	5855.000	50.00	1.18	51.18	110.80	-59.62	peak
9	5875.000	49.79	1.23	51.02	105.20	-54.18	peak
10	5925.000	49.73	1.37	51.10	68.20	-17.10	peak
11	5962.400	52.57	1.46	54.03	68.20	-14.17	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

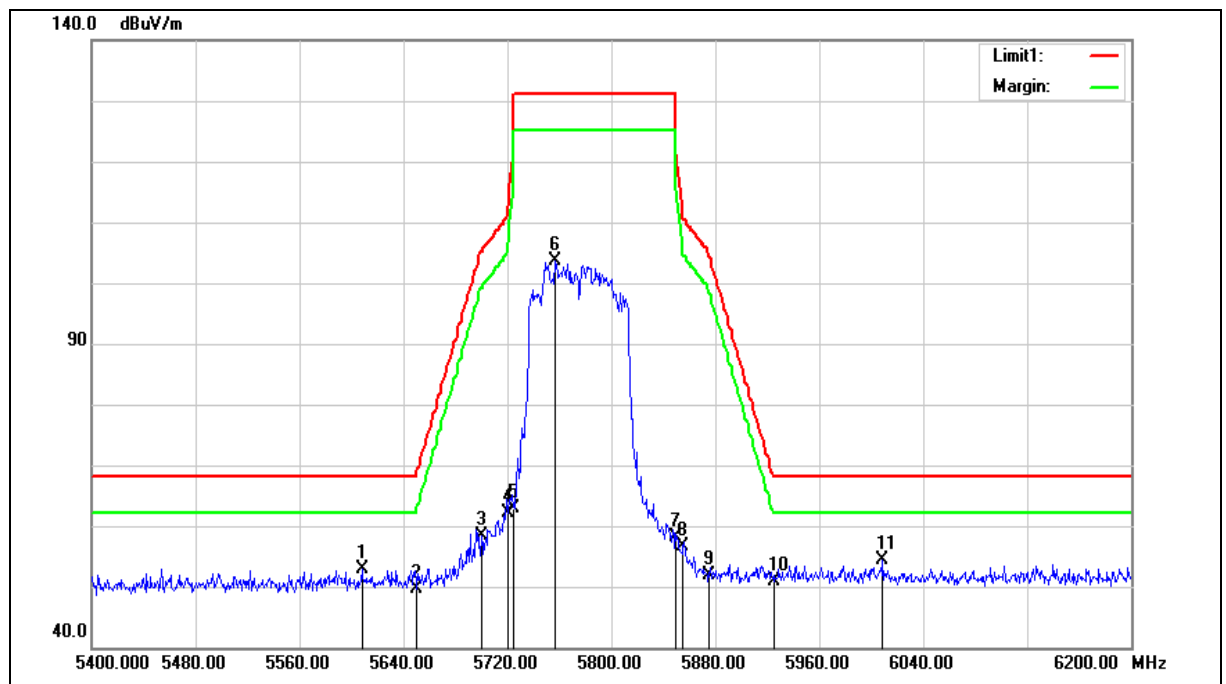

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5608.000	52.44	0.51	52.95	68.20	-15.25	peak
2	5650.000	48.94	0.62	49.56	68.20	-18.64	peak
3	5700.000	57.58	0.75	58.33	105.20	-46.87	peak
4	5720.000	61.25	0.81	62.06	110.80	-48.74	peak
5	5725.000	61.99	0.82	62.81	122.20	-59.39	peak
6	5756.800	102.70	0.91	103.61	--	--	peak
7	5850.000	56.85	1.17	58.02	122.20	-64.18	peak
8	5855.000	55.50	1.18	56.68	110.80	-54.12	peak
9	5875.000	50.72	1.23	51.95	105.20	-53.25	peak
10	5925.000	49.51	1.37	50.88	68.20	-17.32	peak
11	6008.800	52.71	1.60	54.31	68.20	-13.89	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5250 MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

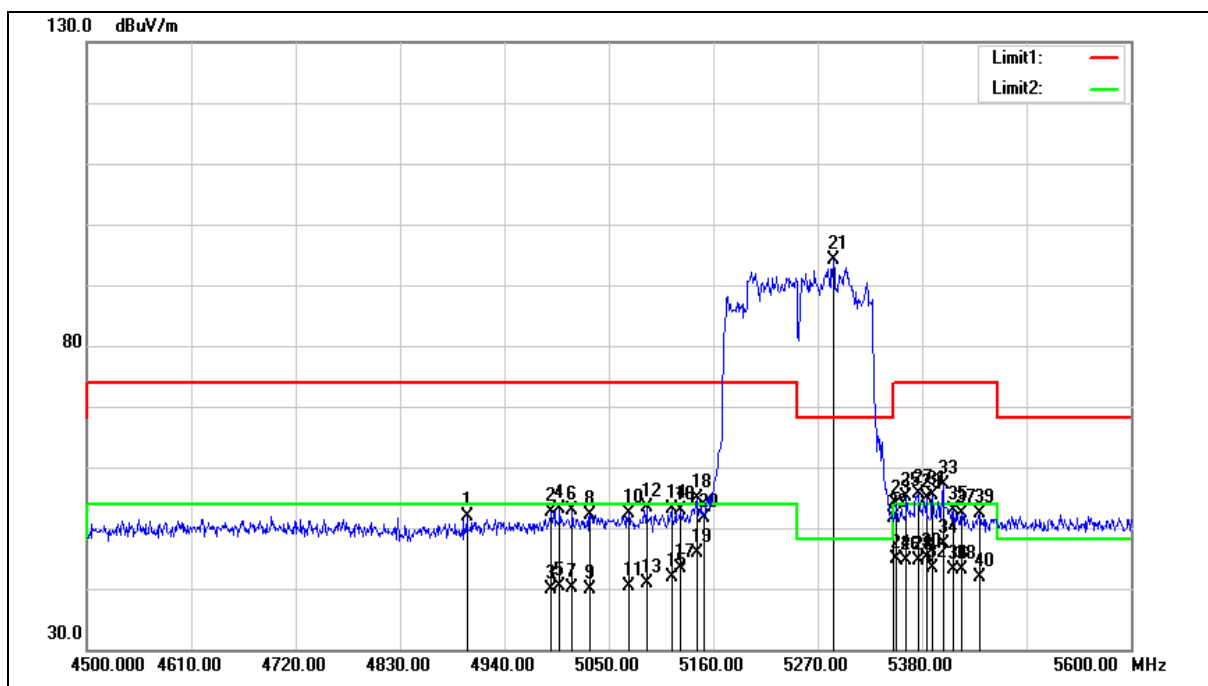

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4900.400	53.01	-1.05	51.96	74.00	-22.04	peak
2	4989.500	53.50	-0.80	52.70	74.00	-21.30	peak
3	4989.500	40.71	-0.80	39.91	54.00	-14.09	AVG
4	4998.300	53.88	-0.77	53.11	74.00	-20.89	peak
5	4998.300	41.03	-0.77	40.26	54.00	-13.74	AVG
6	5011.500	53.52	-0.74	52.78	74.00	-21.22	peak
7	5011.500	40.79	-0.74	40.05	54.00	-13.95	AVG
8	5030.200	52.83	-0.72	52.11	74.00	-21.89	peak
9	5030.200	40.70	-0.72	39.98	54.00	-14.02	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5250 MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10	5070.900	52.91	-0.63	52.28	74.00	-21.72	peak
11	5070.900	40.93	-0.63	40.30	54.00	-13.70	AVG
12	5089.600	54.05	-0.60	53.45	74.00	-20.55	peak
13	5089.600	41.39	-0.60	40.79	54.00	-13.21	AVG
14	5116.000	53.62	-0.54	53.08	74.00	-20.92	peak
15	5116.000	42.42	-0.54	41.88	54.00	-12.12	AVG
16	5124.800	53.36	-0.52	52.84	74.00	-21.16	peak
17	5124.800	43.79	-0.52	43.27	54.00	-10.73	AVG
18	5142.400	55.46	-0.49	54.97	74.00	-19.03	peak
19	5142.400	46.47	-0.49	45.98	54.00	-8.02	AVG
20	5150.000	52.18	-0.48	51.70	74.00	-22.30	peak
21	5286.500	94.31	-0.20	94.11	--	--	peak
22	5350.000	51.66	-0.08	51.58	74.00	-22.42	peak
23	5352.500	54.04	-0.08	53.96	74.00	-20.04	peak
24	5352.500	44.85	-0.08	44.77	54.00	-9.23	AVG
25	5363.500	55.30	-0.06	55.24	74.00	-18.76	peak
26	5363.500	44.69	-0.06	44.63	54.00	-9.37	AVG
27	5376.700	55.66	-0.03	55.63	74.00	-18.37	peak
28	5376.700	44.55	-0.03	44.52	54.00	-9.48	AVG
29	5384.400	54.97	-0.01	54.96	74.00	-19.04	peak
30	5384.400	45.15	-0.01	45.14	54.00	-8.86	AVG
31	5391.000	55.35	0.00	55.35	74.00	-18.65	peak
32	5391.000	43.31	0.00	43.31	54.00	-10.69	AVG
33	5402.000	57.10	0.02	57.12	74.00	-16.88	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5250 MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
34	5402.000	47.38	0.02	47.40	54.00	-6.60	AVG
35	5413.000	52.93	0.04	52.97	74.00	-21.03	peak
36	5413.000	43.11	0.04	43.15	54.00	-10.85	AVG
37	5421.800	52.28	0.06	52.34	74.00	-21.66	peak
38	5421.800	43.08	0.06	43.14	54.00	-10.86	AVG
39	5440.500	52.24	0.09	52.33	74.00	-21.67	peak
40	5440.500	41.68	0.09	41.77	54.00	-12.23	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5250 MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		

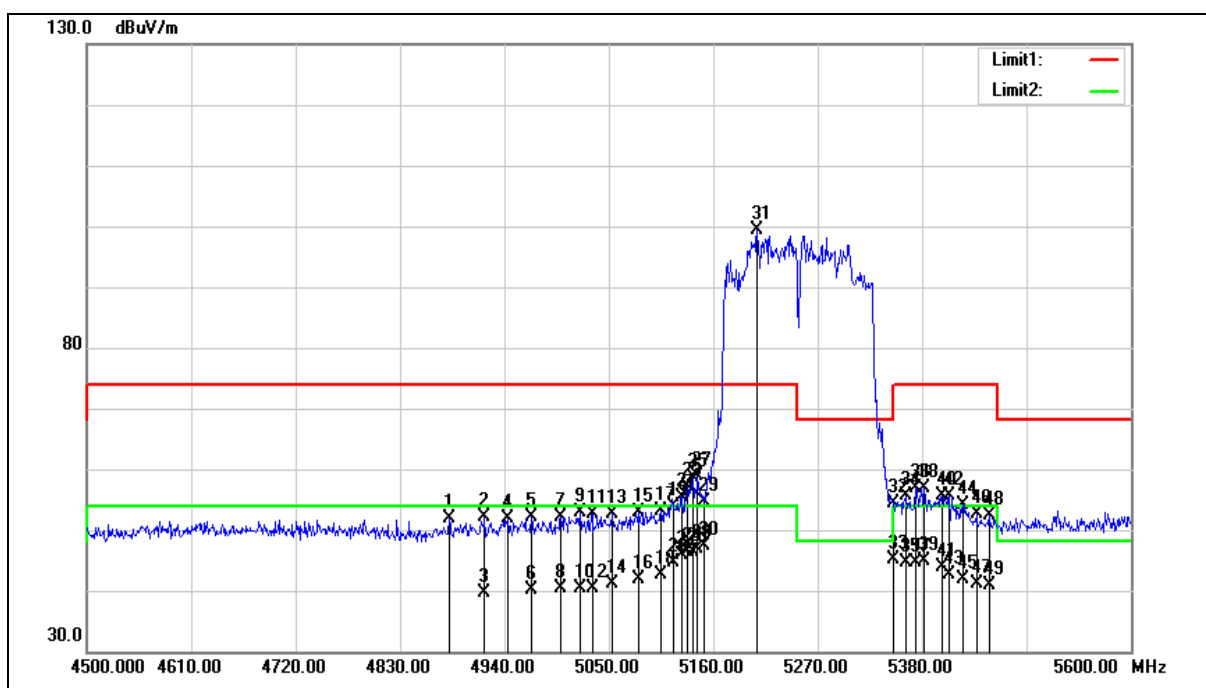

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4881.700	52.92	-1.10	51.82	74.00	-22.18	peak
2	4919.100	53.03	-1.00	52.03	74.00	-21.97	peak
3	4919.100	40.65	-1.00	39.65	54.00	-14.35	AVG
4	4943.300	52.86	-0.93	51.93	74.00	-22.07	peak
5	4968.600	52.90	-0.86	52.04	74.00	-21.96	peak
6	4968.600	41.11	-0.86	40.25	54.00	-13.75	AVG
7	4999.400	52.84	-0.77	52.07	74.00	-21.93	peak
8	4999.400	41.18	-0.77	40.41	54.00	-13.59	AVG
9	5020.300	53.56	-0.73	52.83	74.00	-21.17	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5250 MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
10	5020.300	41.19	-0.73	40.46	54.00	-13.54	AVG
11	5032.400	53.44	-0.70	52.74	74.00	-21.26	peak
12	5032.400	41.07	-0.70	40.37	54.00	-13.63	AVG
13	5053.300	53.24	-0.66	52.58	74.00	-21.42	peak
14	5053.300	41.86	-0.66	41.20	54.00	-12.80	AVG
15	5081.900	53.52	-0.60	52.92	74.00	-21.08	peak
16	5081.900	42.57	-0.60	41.97	54.00	-12.03	AVG
17	5105.000	53.61	-0.57	53.04	74.00	-20.96	peak
18	5105.000	43.15	-0.57	42.58	54.00	-11.42	AVG
19	5118.200	54.31	-0.54	53.77	74.00	-20.23	peak
20	5118.200	45.10	-0.54	44.56	54.00	-9.44	AVG
21	5127.000	55.96	-0.52	55.44	74.00	-18.56	peak
22	5127.000	46.39	-0.52	45.87	54.00	-8.13	AVG
23	5132.500	57.66	-0.51	57.15	74.00	-16.85	peak
24	5132.500	46.77	-0.51	46.26	54.00	-7.74	AVG
25	5139.100	59.18	-0.49	58.69	74.00	-15.31	peak
26	5139.100	46.90	-0.49	46.41	54.00	-7.59	AVG
27	5143.500	59.40	-0.49	58.91	74.00	-15.09	peak
28	5143.500	47.41	-0.49	46.92	54.00	-7.08	AVG
29	5150.000	55.00	-0.48	54.52	74.00	-19.48	peak
30	5150.000	47.92	-0.48	47.44	54.00	-6.56	AVG
31	5206.200	99.65	-0.37	99.28	--	--	peak
32	5350.000	54.55	-0.08	54.47	74.00	-19.53	peak
33	5350.000	45.13	-0.08	45.05	54.00	-8.95	AVG

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5250 MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
34	5363.500	55.71	-0.06	55.65	74.00	-18.35	peak
35	5363.500	44.67	-0.06	44.61	54.00	-9.39	AVG
36	5373.400	57.00	-0.03	56.97	74.00	-17.03	peak
37	5373.400	44.63	-0.03	44.60	54.00	-9.40	AVG
38	5382.200	57.02	-0.02	57.00	74.00	-17.00	peak
39	5382.200	44.90	-0.02	44.88	54.00	-9.12	AVG
40	5400.900	55.53	0.02	55.55	74.00	-18.45	peak
41	5400.900	43.85	0.02	43.87	54.00	-10.13	AVG
42	5408.600	55.52	0.04	55.56	74.00	-18.44	peak
43	5408.600	42.50	0.04	42.54	54.00	-11.46	AVG
44	5422.900	54.13	0.06	54.19	74.00	-19.81	peak
45	5422.900	41.83	0.06	41.89	54.00	-12.11	AVG
46	5437.200	52.51	0.09	52.60	74.00	-21.40	peak
47	5437.200	41.02	0.09	41.11	54.00	-12.89	AVG
48	5450.400	52.35	0.12	52.47	74.00	-21.53	peak
49	5450.400	40.74	0.12	40.86	54.00	-13.14	AVG

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

with HDMI

其它不必要之訊號 (1 GHz 以下)

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

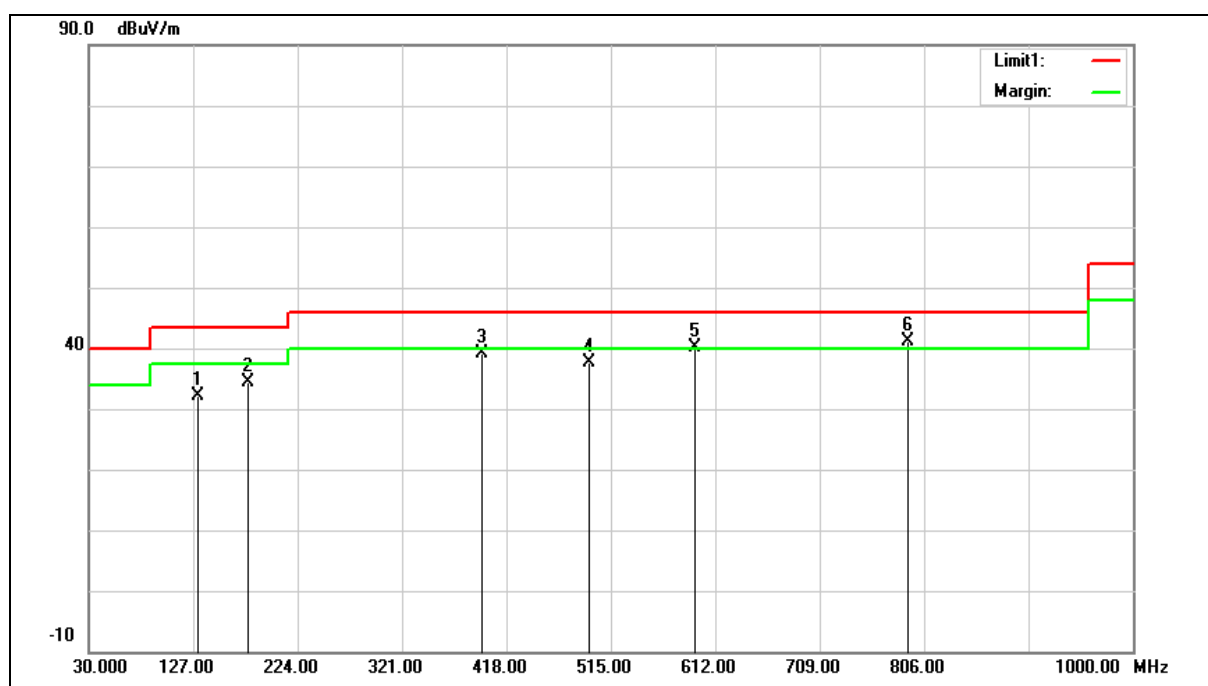

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	131.8500	40.74	-8.66	32.08	43.50	-11.42	QP
2	178.4100	43.05	-8.74	34.31	43.50	-9.19	QP
3	395.6900	44.07	-4.87	39.20	46.00	-6.80	QP
4	494.6300	41.28	-3.64	37.64	46.00	-8.36	QP
5	593.5700	41.58	-1.41	40.17	46.00	-5.83	QP
6	791.4500	39.54	1.48	41.02	46.00	-4.98	QP


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

Example: 32.08 = -8.66 + 40.74

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

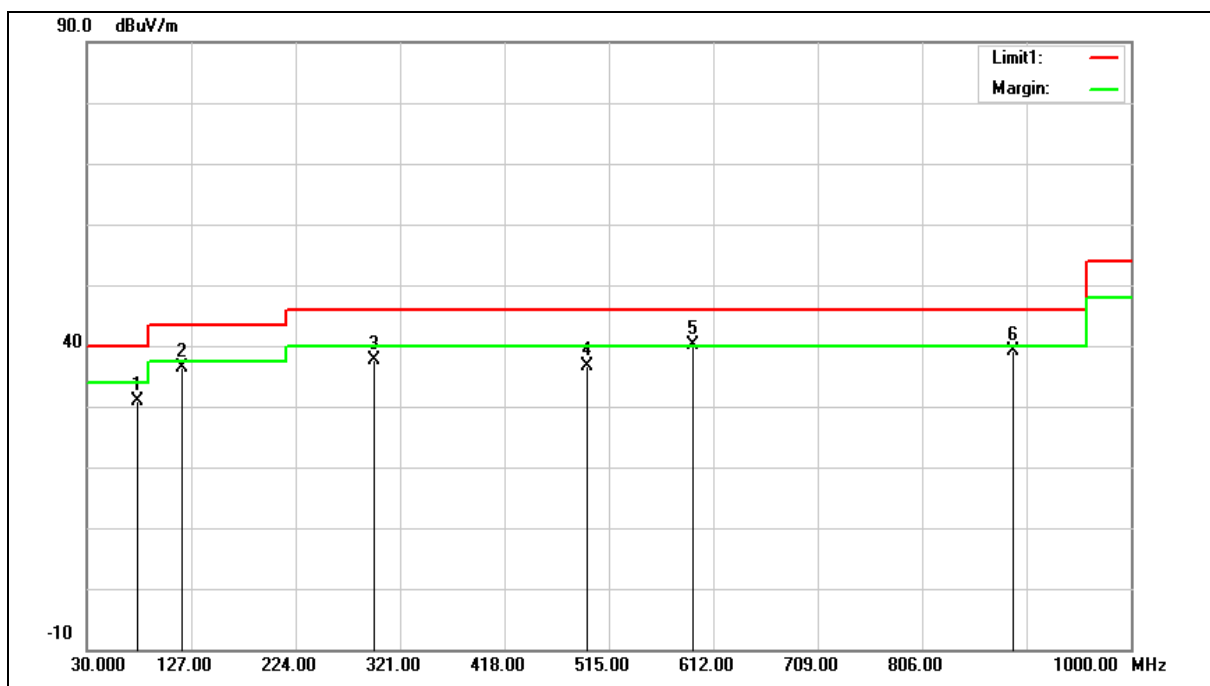

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	76.5600	42.96	-11.96	31.00	40.00	-9.00	QP
2	118.2700	46.39	-10.11	36.28	43.50	-7.22	QP
3	296.7500	44.31	-6.61	37.70	46.00	-8.30	QP
4	494.6300	40.28	-3.64	36.64	46.00	-9.36	QP
5	593.5700	41.62	-1.41	40.21	46.00	-5.79	QP
6	890.3900	36.28	2.90	39.18	46.00	-6.82	QP

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).


Example: $31.00 = -11.96 + 42.96$

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

場強輻射量測 (1 GHz 以上)

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

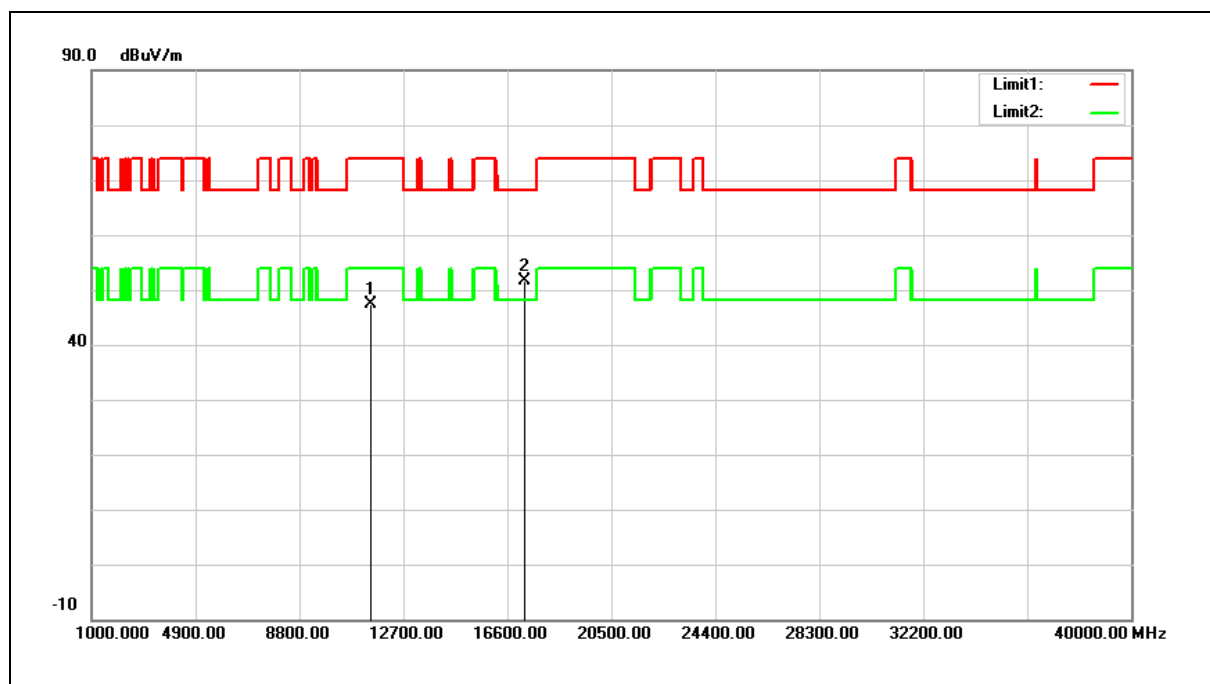

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	34.70	12.68	47.38	74.00	-26.62	peak
2	17235.000	33.07	18.52	51.59	68.20	-16.61	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 47.38 = 12.68 + 34.70

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

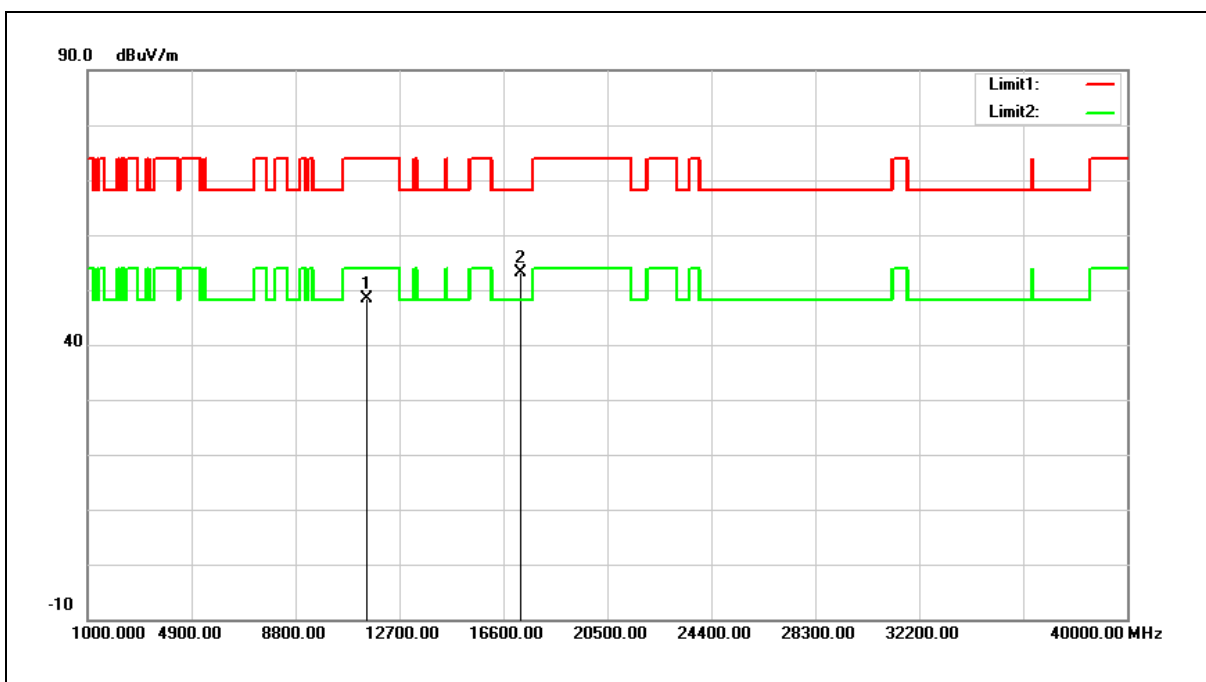

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.61	12.68	48.29	74.00	-25.71	peak
2	17235.000	34.72	18.52	53.24	68.20	-14.96	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 48.29 = 12.68 + 35.61

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Annex E. Conducted Test Results (5 GHz)

Maximum Conducted Output Power

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)						
				ANT-0		ANT-1		ANT-0+1		Limit (dBm)
				dBm	W	dBm	W	dBm	W	
Mode 6	6	36	5180	12.15	0.016	12.34	0.017	---	---	≤ 24.00
		40	5200	12.41	0.017	12.42	0.017	---	---	≤ 24.00
		44	5220	12.37	0.017	12.38	0.017	---	---	≤ 24.00
		48	5240	12.42	0.017	12.52	0.018	---	---	≤ 24.00
		52	5260	12.32	0.017	12.38	0.017	---	---	≤ 24.00
		56	5280	12.33	0.017	12.34	0.017	---	---	≤ 24.00
		60	5300	12.29	0.017	12.31	0.017	---	---	≤ 24.00
		64	5320	12.27	0.017	12.39	0.017	---	---	≤ 24.00
		100	5500	12.15	0.016	12.41	0.017	---	---	≤ 24.00
		104	5520	12.25	0.017	12.38	0.017	---	---	≤ 24.00
		108	5540	12.28	0.017	12.39	0.017	---	---	≤ 24.00
		112	5560	12.37	0.017	12.44	0.018	---	---	≤ 24.00
		116	5580	12.28	0.017	12.37	0.017	---	---	≤ 24.00
		132	5660	12.29	0.017	12.37	0.017	---	---	≤ 24.00
		136	5680	12.34	0.017	12.39	0.017	---	---	≤ 24.00
		140	5700	12.37	0.017	12.49	0.018	---	---	≤ 24.00
		149	5745	12.38	0.017	12.44	0.018	---	---	≤ 30.00
		153	5765	12.15	0.016	12.28	0.017	---	---	≤ 30.00
		157	5785	12.17	0.016	12.31	0.017	---	---	≤ 30.00
		161	5805	12.14	0.016	12.29	0.017	---	---	≤ 30.00
		165	5825	12.32	0.017	12.41	0.017	---	---	≤ 30.00

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)						
				ANT-0		ANT-1		ANT-0+1		Limit (dBm)
				dBm	W	dBm	W	dBm	W	
Mode 7	13	36	5180	9.03	0.008	9.22	0.008	12.14	0.016	≤ 24.00
		40	5200	9.01	0.008	9.07	0.008	12.05	0.016	≤ 24.00
		44	5220	8.98	0.008	9.01	0.008	12.01	0.016	≤ 24.00
		48	5240	9.18	0.008	9.28	0.008	12.24	0.017	≤ 24.00
		52	5260	9.02	0.008	9.04	0.008	12.04	0.016	≤ 24.00
		56	5280	9.00	0.008	9.02	0.008	12.02	0.016	≤ 24.00
		60	5300	8.97	0.008	9.00	0.008	12.00	0.016	≤ 24.00
		64	5320	9.03	0.008	9.01	0.008	12.03	0.016	≤ 24.00
		100	5500	9.27	0.008	9.27	0.008	12.28	0.017	≤ 24.00
		104	5520	9.01	0.008	9.02	0.008	12.03	0.016	≤ 24.00
		108	5540	9.02	0.008	9.01	0.008	12.03	0.016	≤ 24.00
		112	5560	9.04	0.008	9.06	0.008	12.06	0.016	≤ 24.00
		116	5580	8.91	0.008	9.02	0.008	11.98	0.016	≤ 24.00
		132	5660	8.92	0.008	9.03	0.008	11.99	0.016	≤ 24.00
		136	5680	9.01	0.008	9.03	0.008	12.03	0.016	≤ 24.00
		140	5700	9.03	0.008	9.04	0.008	12.05	0.016	≤ 24.00
		149	5745	9.07	0.008	9.26	0.008	12.18	0.017	≤ 30.00
		153	5765	9.01	0.008	9.02	0.008	12.03	0.016	≤ 30.00
		157	5785	9.04	0.008	9.06	0.008	12.06	0.016	≤ 30.00
		161	5805	9.03	0.008	9.01	0.008	12.03	0.016	≤ 30.00
		165	5825	9.17	0.008	9.25	0.008	12.22	0.017	≤ 30.00
Mode 8	27	38	5190	7.31	0.005	7.35	0.005	10.34	0.011	≤ 24.00
		46	5230	9.33	0.009	9.37	0.009	12.36	0.017	≤ 24.00
		54	5270	9.33	0.009	9.33	0.009	12.34	0.017	≤ 24.00
		62	5310	7.24	0.005	7.22	0.005	10.24	0.011	≤ 24.00
		102	5510	7.07	0.005	7.15	0.005	10.12	0.010	≤ 24.00
		110	5550	9.01	0.008	9.06	0.008	12.05	0.016	≤ 24.00
		134	5670	9.24	0.008	9.31	0.009	12.29	0.017	≤ 24.00
		151	5755	9.26	0.008	9.30	0.009	12.29	0.017	≤ 30.00
		159	5795	9.17	0.008	9.17	0.008	12.18	0.017	≤ 30.00

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)						
				ANT-0		ANT-1		ANT-0+1		Limit (dBm)
				dBm	W	dBm	W	dBm	W	
Mode 9	13	36	5180	9.06	0.008	9.27	0.008	12.18	0.017	≤ 24.00
		40	5200	9.10	0.008	9.12	0.008	12.12	0.016	≤ 24.00
		44	5220	9.07	0.008	9.09	0.008	12.09	0.016	≤ 24.00
		48	5240	9.28	0.008	9.39	0.009	12.35	0.017	≤ 24.00
		52	5260	9.07	0.008	9.09	0.008	12.09	0.016	≤ 24.00
		56	5280	9.09	0.008	9.11	0.008	12.11	0.016	≤ 24.00
		60	5300	9.04	0.008	9.04	0.008	12.05	0.016	≤ 24.00
		64	5320	9.09	0.008	9.07	0.008	12.09	0.016	≤ 24.00
		100	5500	9.29	0.008	9.34	0.009	12.33	0.017	≤ 24.00
		104	5520	9.06	0.008	9.08	0.008	12.08	0.016	≤ 24.00
		108	5540	9.07	0.008	9.09	0.008	12.09	0.016	≤ 24.00
		112	5560	9.10	0.008	9.14	0.008	12.13	0.016	≤ 24.00
		116	5580	9.05	0.008	9.07	0.008	12.07	0.016	≤ 24.00
		132	5660	9.04	0.008	9.08	0.008	12.07	0.016	≤ 24.00
		136	5680	9.05	0.008	9.08	0.008	12.08	0.016	≤ 24.00
		140	5700	9.04	0.008	9.09	0.008	12.08	0.016	≤ 24.00
		149	5745	9.18	0.008	9.29	0.008	12.25	0.017	≤ 30.00
		153	5765	9.02	0.008	9.04	0.008	12.04	0.016	≤ 30.00
		157	5785	9.11	0.008	9.13	0.008	12.13	0.016	≤ 30.00
		161	5805	9.04	0.008	9.05	0.008	12.06	0.016	≤ 30.00
		165	5825	9.27	0.008	9.33	0.009	12.31	0.017	≤ 30.00
Mode 10	27	38	5190	7.34	0.005	7.42	0.006	10.39	0.011	≤ 24.00
		46	5230	9.37	0.009	9.38	0.009	12.39	0.017	≤ 24.00
		54	5270	9.35	0.009	9.37	0.009	12.37	0.017	≤ 24.00
		62	5310	7.25	0.005	7.29	0.005	10.28	0.011	≤ 24.00
		102	5510	7.19	0.005	7.21	0.005	10.21	0.010	≤ 24.00
		110	5550	9.07	0.008	9.09	0.008	12.09	0.016	≤ 24.00
		134	5670	9.28	0.008	9.32	0.009	12.31	0.017	≤ 24.00
		151	5755	9.37	0.009	9.41	0.009	12.40	0.017	≤ 30.00
		159	5795	9.24	0.008	9.27	0.008	12.27	0.017	≤ 30.00
Mode 11	58.6	42	5210	7.41	0.006	7.42	0.006	10.43	0.011	≤ 24.00
		58	5290	7.49	0.006	7.52	0.006	10.52	0.011	≤ 24.00
		106	5530	7.44	0.006	7.47	0.006	10.47	0.011	≤ 24.00
		155	5775	9.38	0.009	9.44	0.009	12.42	0.017	≤ 30.00
Mode 12	117	50	5250	7.25	0.005	7.19	0.005	10.23	0.011	≤ 24.00
		50	5250	7.43	0.006	7.30	0.005	10.38	0.011	≤ 24.00

Maximum Power Spectral Density

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 9	36	5180	-1.743	0.167	-1.576	11.00
	40	5200	-0.988	0.167	-0.821	11.00
	48	5240	-0.835	0.167	-0.668	11.00
	52	5260	-1.461	0.167	-1.294	11.00
	56	5280	-1.388	0.167	-1.221	11.00
	64	5320	-1.466	0.167	-1.299	11.00
	100	5500	-1.720	0.167	-1.553	11.00
	112	5560	-1.824	0.167	-1.657	11.00
	140	5700	-1.481	0.167	-1.314	11.00
Mode 10	38	5190	-6.497	0.317	-6.180	11.00
	46	5230	-4.532	0.317	-4.215	11.00
	54	5270	-4.543	0.317	-4.226	11.00
	62	5310	-6.605	0.317	-6.288	11.00
	102	5510	-6.783	0.317	-6.466	11.00
	110	5550	-4.801	0.317	-4.484	11.00
	134	5670	-5.309	0.317	-4.992	11.00
Mode 11	42	5210	-9.387	0.653	-8.734	11.00
	58	5290	-9.029	0.653	-8.376	11.00
	106	5530	-9.458	0.653	-8.805	11.00
Mode 12	50	5250	-12.353	0.951	-11.402	11.00
	50	5250	-12.200	0.951	-11.249	11.00

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 9	149	5745	-10.609	0.167	-3.452	30.00
	157	5785	-10.820	0.167	-3.663	30.00
	165	5825	-10.630	0.167	-3.473	30.00
Mode 10	151	5755	-13.439	0.317	-6.132	30.00
	159	5795	-13.469	0.317	-6.162	30.00
Mode 11	155	5775	-16.153	0.653	-8.511	30.00

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ration = 10*Log(500 kHz/100 kHz)

ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 6	36	5180	2.144	0.045	2.189	11.00
	40	5200	1.945	0.045	1.990	11.00
	48	5240	2.449	0.045	2.494	11.00
	52	5260	2.253	0.045	2.298	11.00
	56	5280	2.113	0.045	2.158	11.00
	64	5320	2.057	0.045	2.102	11.00
	100	5500	2.048	0.045	2.093	11.00
	112	5560	1.611	0.045	1.656	11.00
	140	5700	2.156	0.045	2.201	11.00
Mode 9	36	5180	-1.226	0.167	-1.059	11.00
	40	5200	-1.491	0.167	-1.324	11.00
	48	5240	-1.033	0.167	-0.866	11.00
	52	5260	-1.144	0.167	-0.977	11.00
	56	5280	-1.335	0.167	-1.168	11.00
	64	5320	-1.354	0.167	-1.187	11.00
	100	5500	-1.200	0.167	-1.033	11.00
	112	5560	-1.599	0.167	-1.432	11.00
	140	5700	-1.280	0.167	-1.113	11.00
Mode 10	38	5190	-6.454	0.317	-6.137	11.00
	46	5230	-4.192	0.317	-3.875	11.00
	54	5270	-4.444	0.317	-4.127	11.00
	62	5310	-6.356	0.317	-6.039	11.00
	102	5510	-6.047	0.317	-5.730	11.00
	110	5550	-5.094	0.317	-4.777	11.00
	134	5670	-4.474	0.317	-4.157	11.00
Mode 11	42	5210	-9.187	0.653	-8.534	11.00
	58	5290	-9.104	0.653	-8.451	11.00
	106	5530	-9.420	0.653	-8.767	11.00
Mode 12	50	5250	-12.360	0.951	-11.409	11.00
	50	5250	-12.022	0.951	-11.071	11.00

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 6	149	5745	-7.130	0.045	-0.096	30.00
	157	5785	-7.875	0.045	-0.841	30.00
	165	5825	-7.203	0.045	-0.169	30.00
Mode 9	149	5745	-10.445	0.167	-3.288	30.00
	157	5785	-10.344	0.167	-3.187	30.00
	165	5825	-9.987	0.167	-2.830	30.00
Mode 10	151	5755	-13.571	0.317	-6.264	30.00
	159	5795	-13.397	0.317	-6.090	30.00
Mode 11	155	5775	-15.959	0.653	-8.317	30.00

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ration = 10*Log(500 kHz/100 kHz)

ANT-0+1				
操作模式	頻道 (CH)	頻率 (MHz)	轉換值(dBm/MHz)	限制值 (dBm/MHz)
Mode 9	36	5180	1.701	11.00
	40	5200	1.945	11.00
	48	5240	2.245	11.00
	52	5260	1.878	11.00
	56	5280	1.816	11.00
	64	5320	1.768	11.00
	100	5500	1.725	11.00
	112	5560	1.468	11.00
	140	5700	1.798	11.00
Mode 10	38	5190	-3.148	11.00
	46	5230	-1.031	11.00
	54	5270	-1.166	11.00
	62	5310	-3.152	11.00
	102	5510	-3.072	11.00
	110	5550	-1.618	11.00
	134	5670	-1.544	11.00
Mode 11	42	5210	-5.623	11.00
	58	5290	-5.403	11.00
	106	5530	-5.776	11.00
Mode 12	50	5250	-8.395	11.00
	50	5250	-8.148	11.00

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT-0+1				
操作模式	頻道 (CH)	頻率 (MHz)	轉換值(dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 9	149	5745	-0.359	30.00
	157	5785	-0.408	30.00
	165	5825	-0.129	30.00
Mode 10	151	5755	-3.188	30.00
	159	5795	-3.116	30.00
Mode 11	155	5775	-5.402	30.00

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ration = 10*Log(500 kHz/100 kHz)

Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0

CH36




CH40



CH48



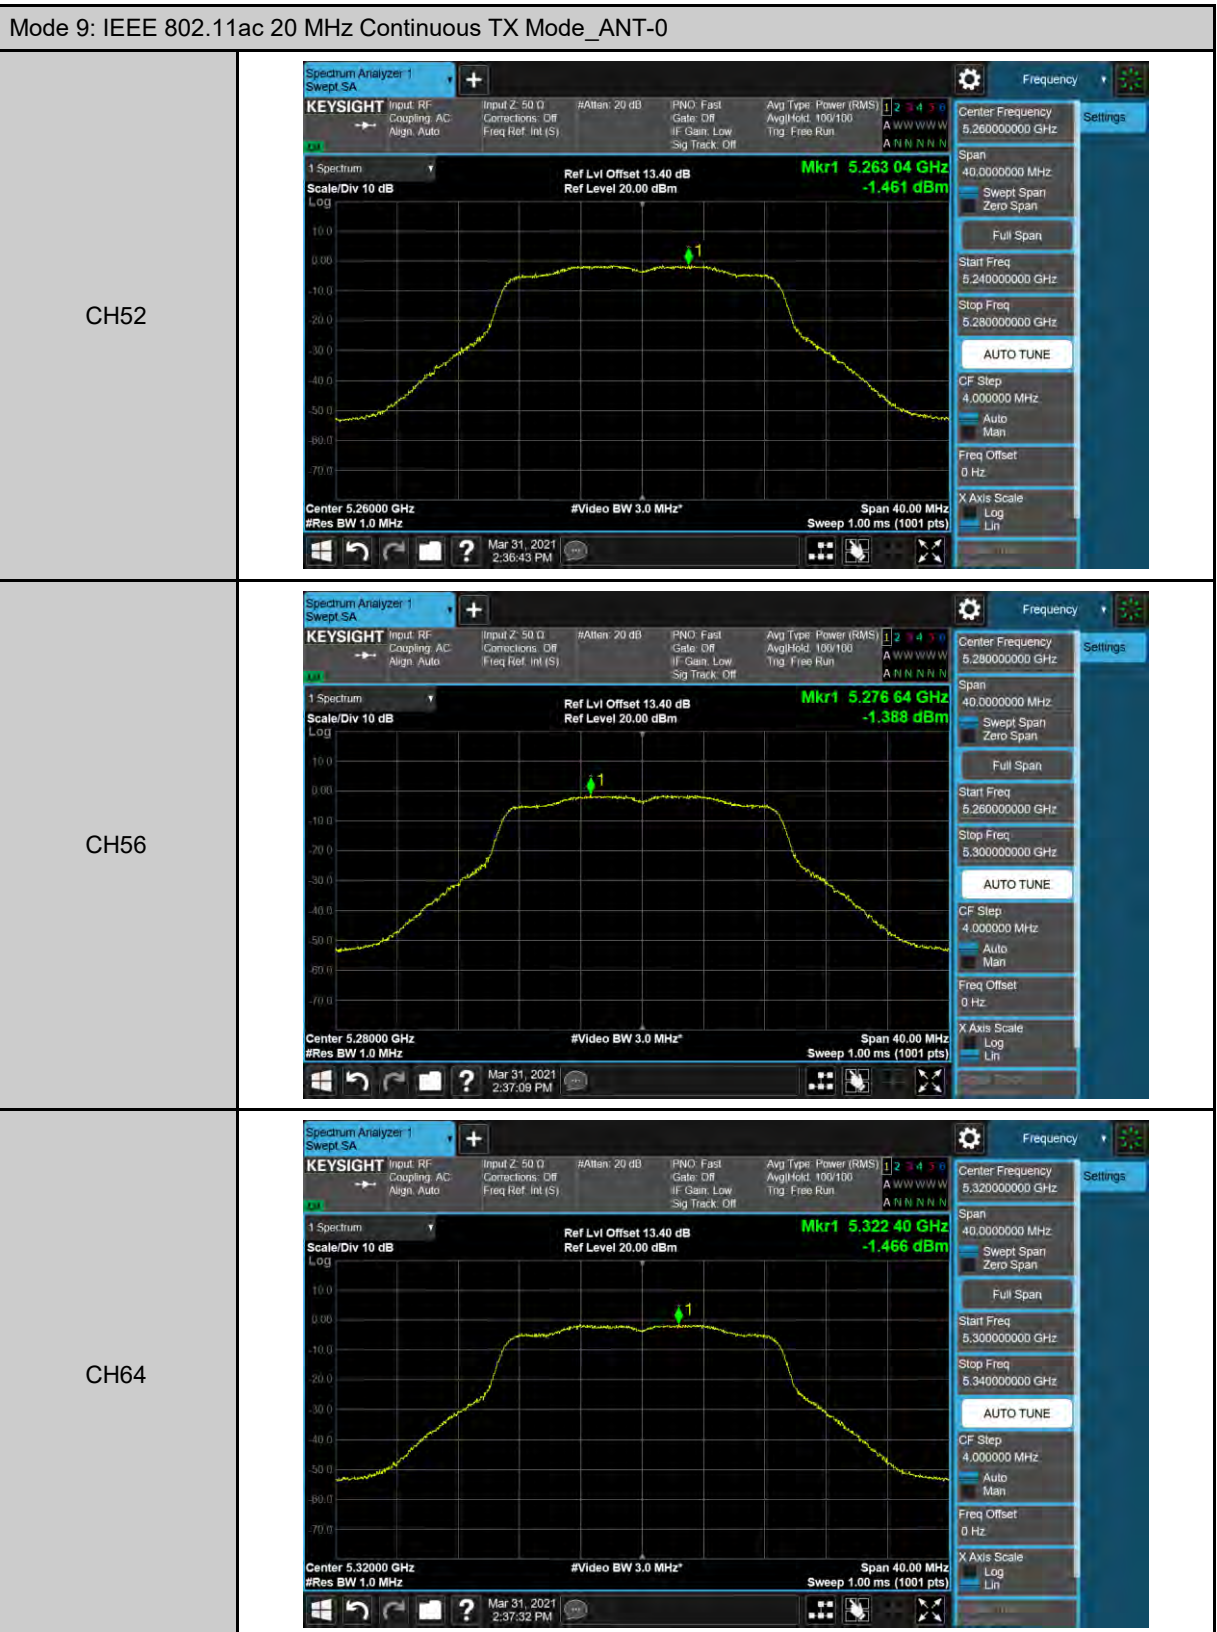

Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0

CH100



CH112



CH140




Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0


CH149



CH157

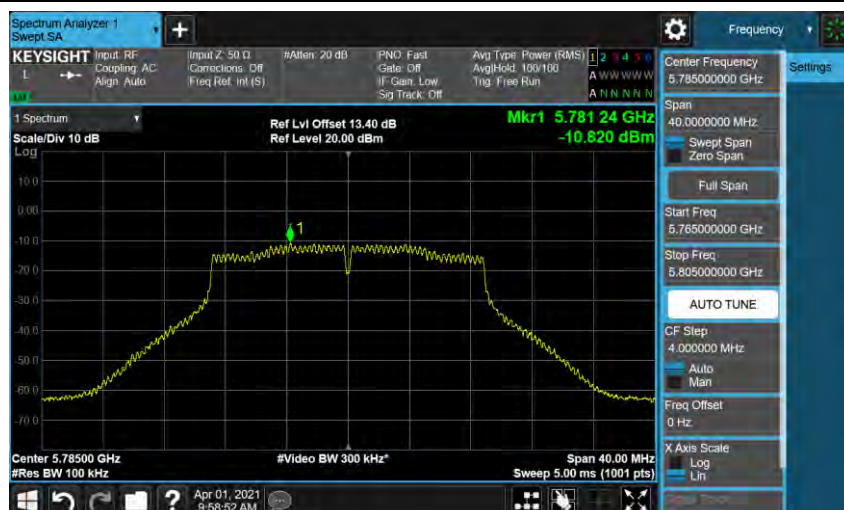

CH165

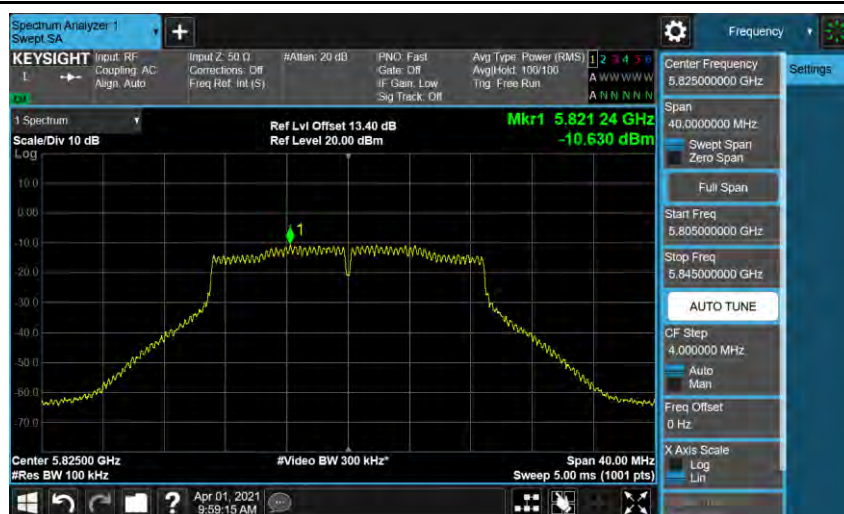

Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0

CH38



CH46



Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0

CH54



CH62



Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0


CH102



CH110




CH134

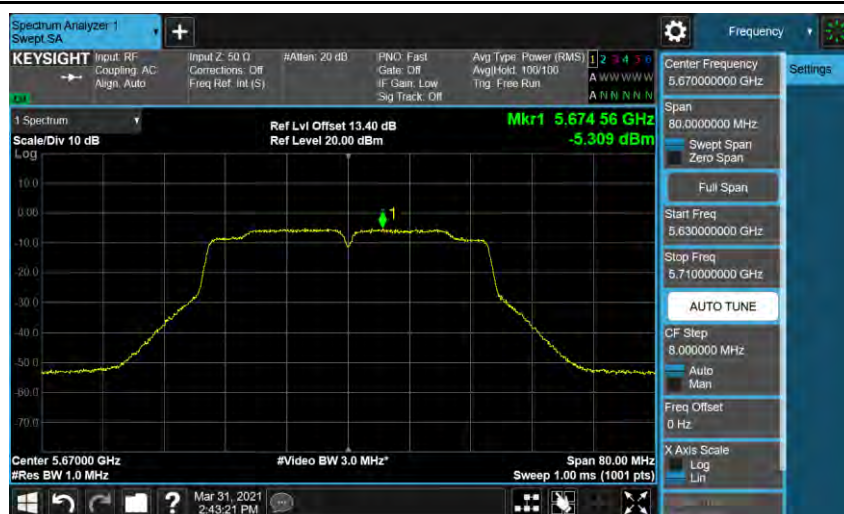


Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0

CH151

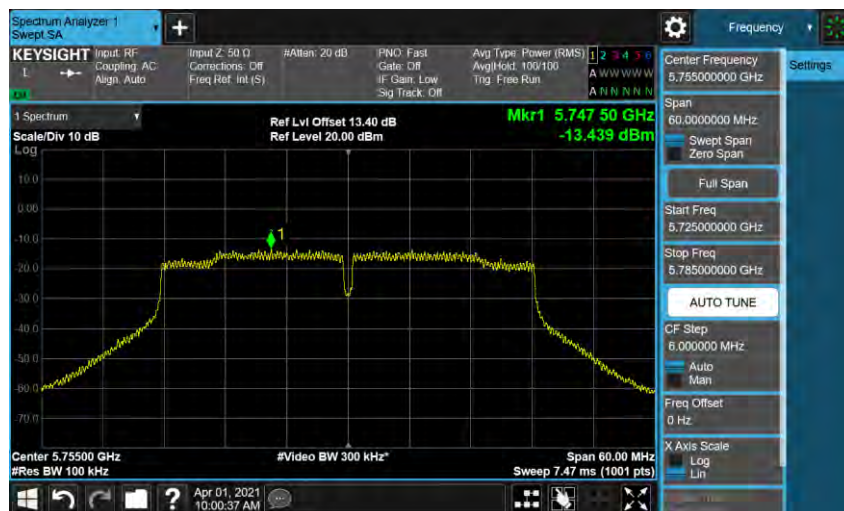

CH159

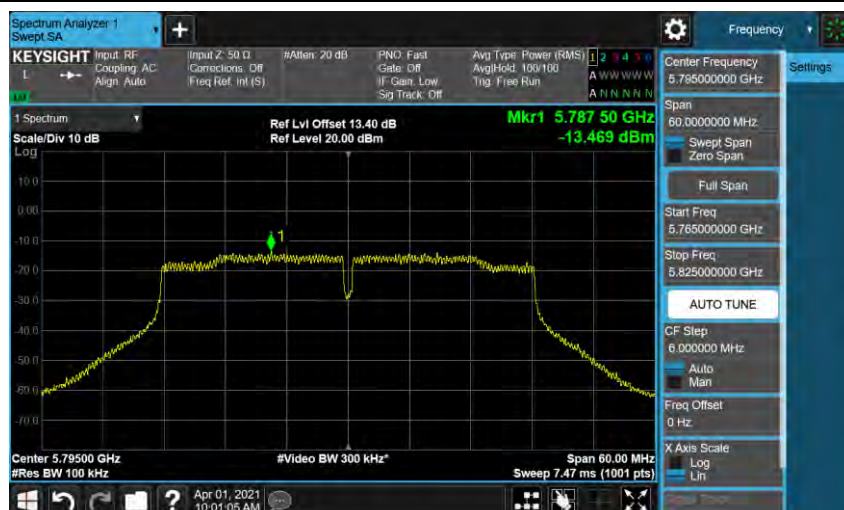

Mode 11: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-0

CH42



CH58



Mode 11: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-0

CH106



CH155



Mode 12: IEEE 802.11ac 160 MHz Continuous TX Mode_ANT-0

CH50



CH50



Mode 6: IEEE 802.11a Continuous TX Mode_ANT-1

CH36



CH40



CH48



Mode 6: IEEE 802.11a Continuous TX Mode_ANT-1

CH52



CH56



CH64



Mode 6: IEEE 802.11a Continuous TX Mode_ANT-1

CH100



CH112



CH140



Mode 6: IEEE 802.11a Continuous TX Mode_ANT-1

CH149



CH157



CH165



Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-1

CH36



CH40



CH48



Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-1

CH52



CH56



CH64



Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-1

CH100



CH112



CH140



Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-1


CH149



CH157



CH165

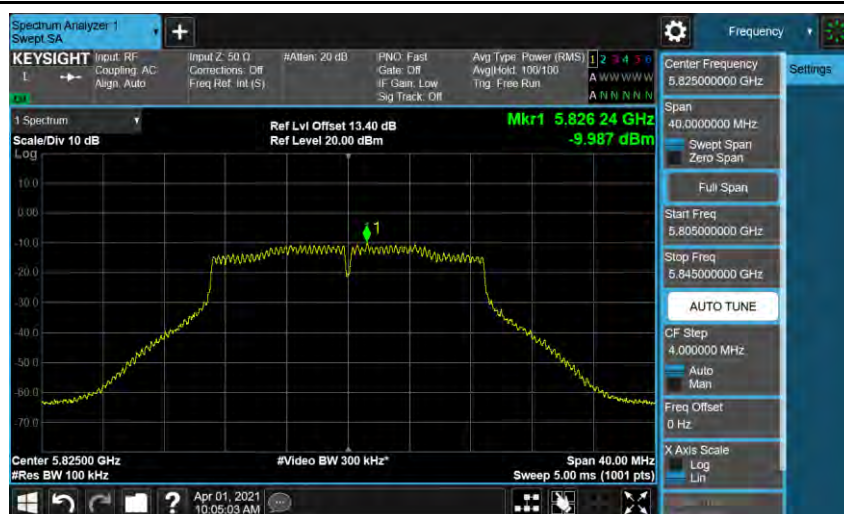

Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-1

CH38



CH46



Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-1

CH54



CH62



Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-1

CH102



CH110




CH134




Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-1

CH151

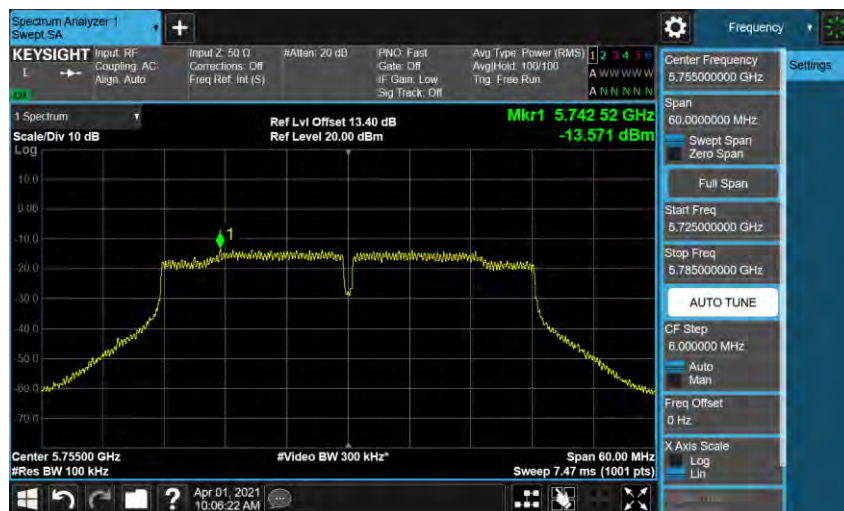

CH159

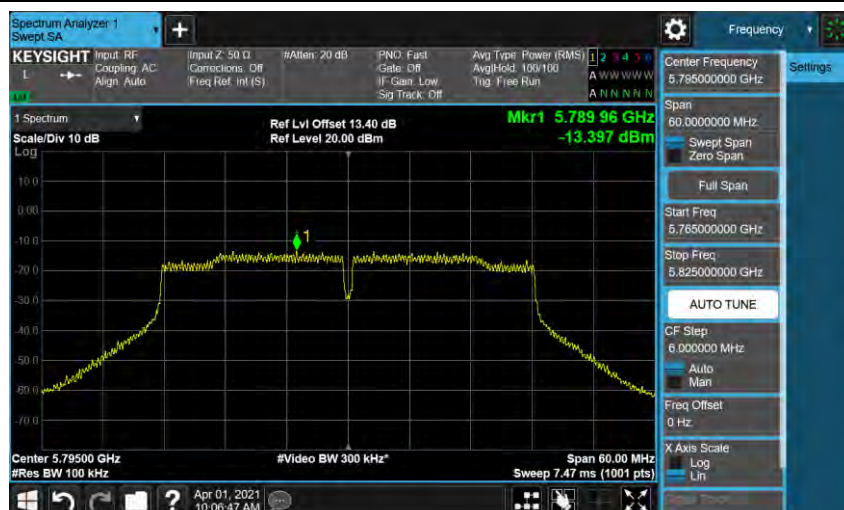

Mode 11: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-1

CH42



CH58




Mode 11: IEEE 802.11ac 80 MHz Continuous TX Mode_ANT-1

CH106



CH155

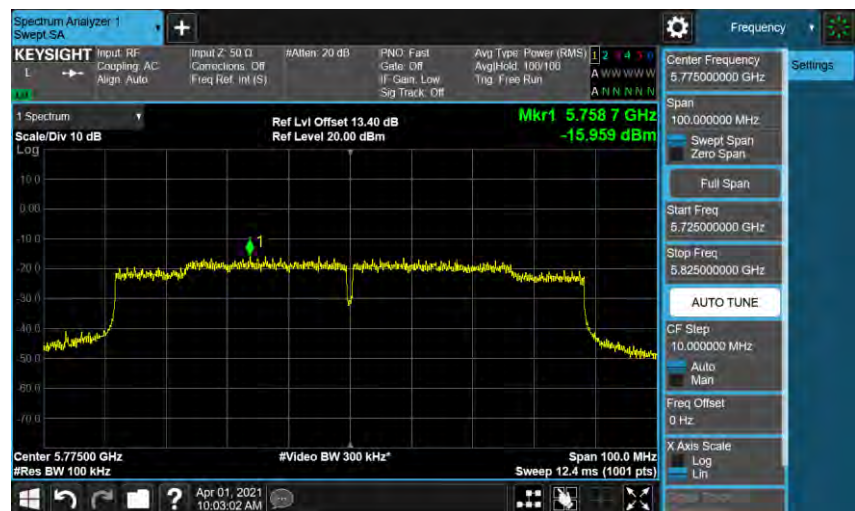

Mode 12: IEEE 802.11ac 160 MHz Continuous TX Mode_ANT-1

CH50



CH50



26 dB Bandwidth

操作模式	頻道 (CH)	頻率 (MHz)	26 dB 頻寬量測值 (MHz)	
			ANT-0	ANT-1
Mode 6	36	5180	---	24.010
	40	5200	---	23.480
	48	5240	---	22.730
	52	5260	---	23.510
	56	5280	---	22.720
	64	5320	---	23.030
	100	5500	---	23.070
	112	5560	---	23.190
	140	5700	---	24.120
Mode 7	52	5260	23.560	23.800
	56	5280	24.690	23.930
	64	5320	24.680	23.830
	100	5500	24.480	23.840
	112	5560	23.830	23.870
	140	5700	23.440	23.640
Mode 8	54	5270	42.260	41.860
	62	5310	41.920	41.590
	102	5510	43.240	42.700
	110	5550	42.540	41.890
	134	5670	43.910	42.830
Mode 9	36	5180	23.790	23.170
	40	5200	23.890	23.500
	48	5240	23.520	23.280
	52	5260	23.510	22.830
	56	5280	24.150	23.030
	64	5320	25.120	23.280
	100	5500	24.850	23.660
	112	5560	23.440	23.870
	140	5700	24.160	23.600
Mode 10	38	5190	43.480	43.710
	46	5230	43.240	41.800
	54	5270	44.380	41.960
	62	5310	42.970	43.030
	102	5510	43.430	43.990
	110	5550	42.930	42.370
	134	5670	44.660	43.160
Mode 11	42	5210	82.900	82.700
	58	5290	82.790	83.490
	106	5530	86.030	82.590
Mode 12	50	5250	80.790	80.820
	50	5250	81.460	80.890

Mode 7: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-0


CH52



CH56



CH64

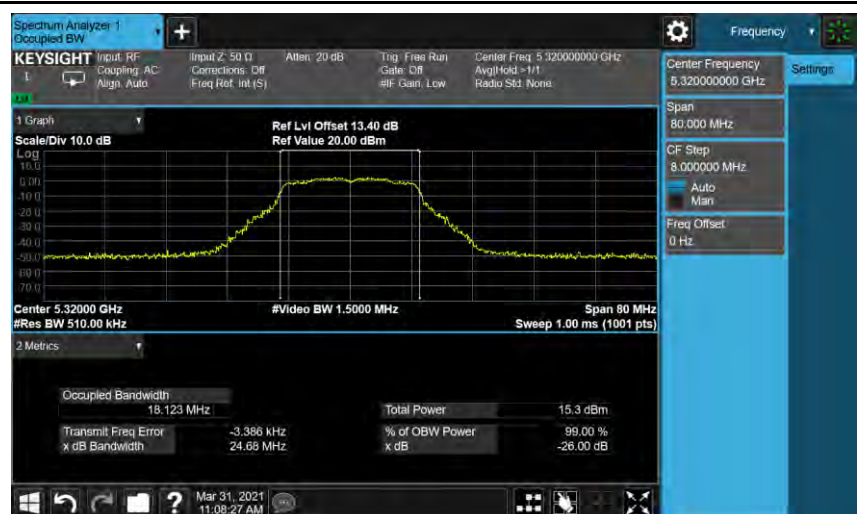

Mode 7: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-0


CH100



CH112




CH140

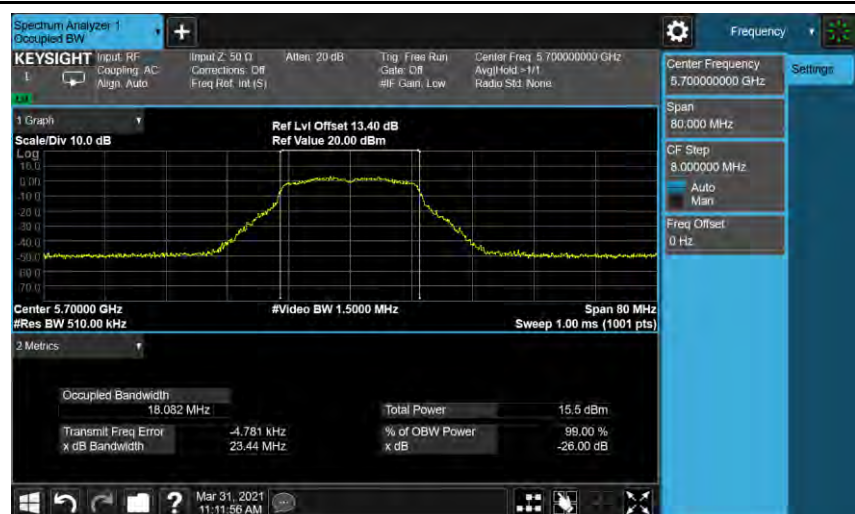

Mode 8: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-0

CH54

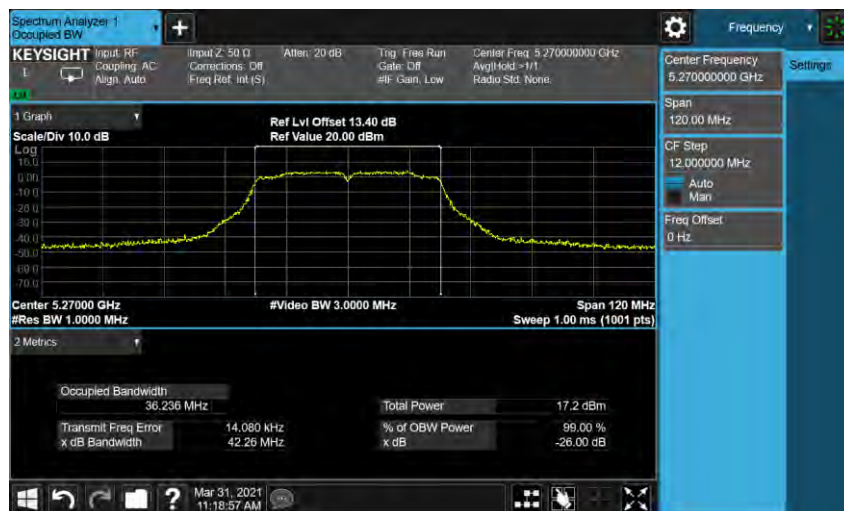

CH62



Mode 8: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode_ANT-0

CH102



CH110



CH134




Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0

CH36



CH40

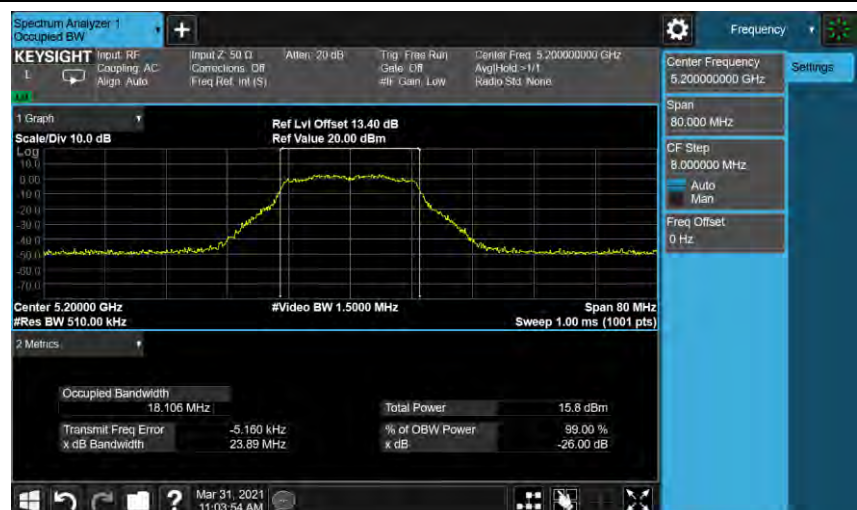


CH48



Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0


CH52

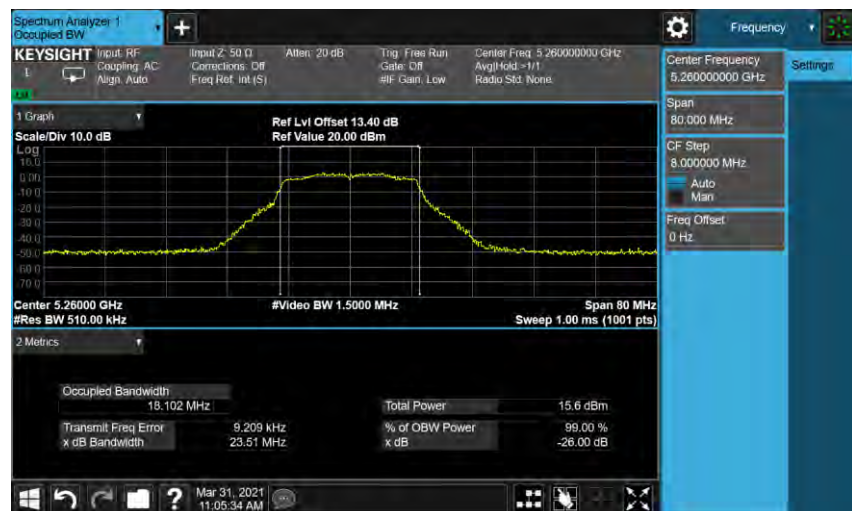

CH56



CH64

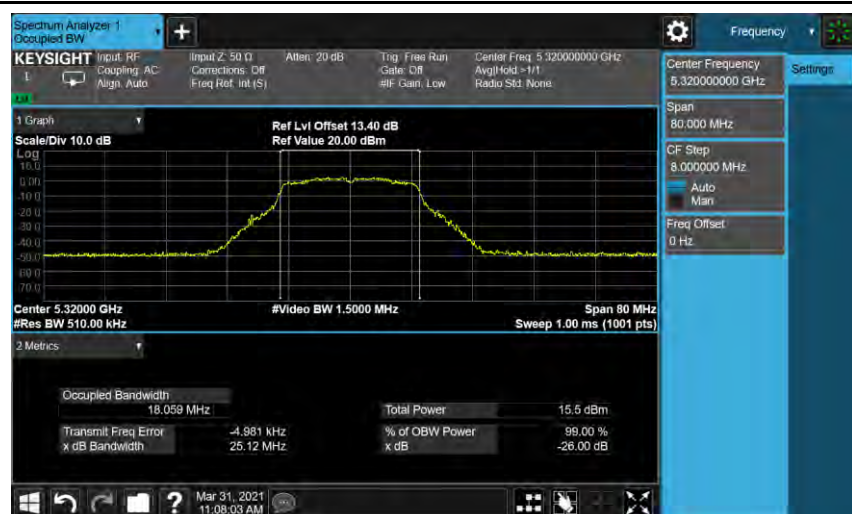


Mode 9: IEEE 802.11ac 20 MHz Continuous TX Mode_ANT-0

CH100



CH112

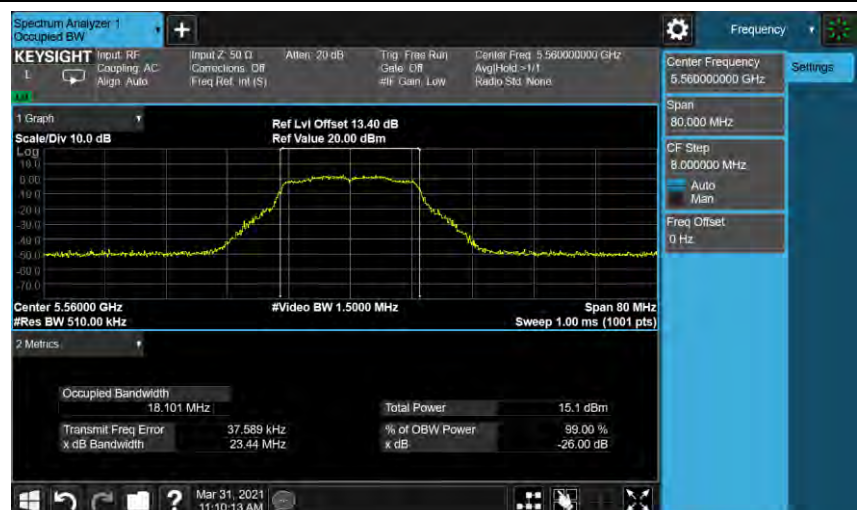


CH140



Mode 10: IEEE 802.11ac 40 MHz Continuous TX Mode_ANT-0

CH38

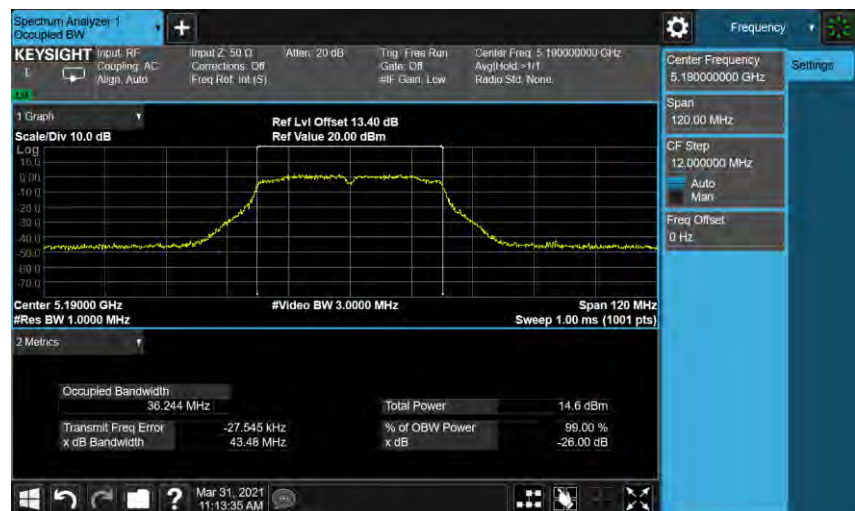

CH46



