


Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

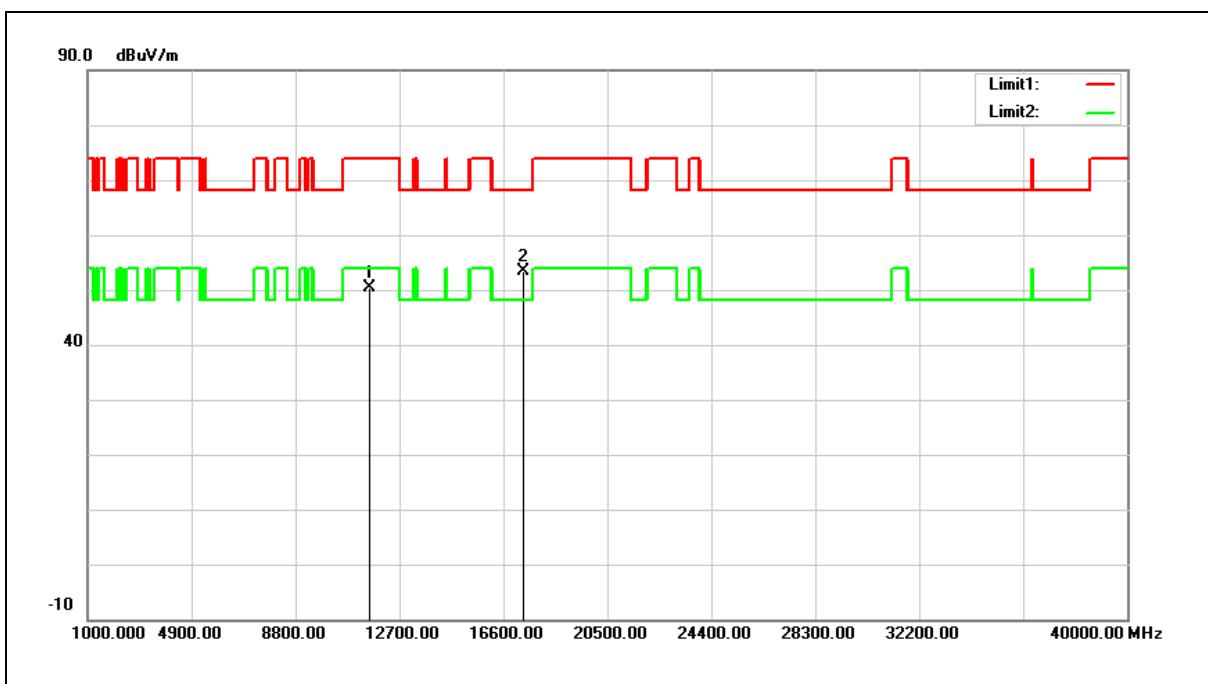


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	44.80	5.70	50.50	74.00	-23.50	peak
2	17355.000	42.34	10.92	53.26	68.20	-14.94	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

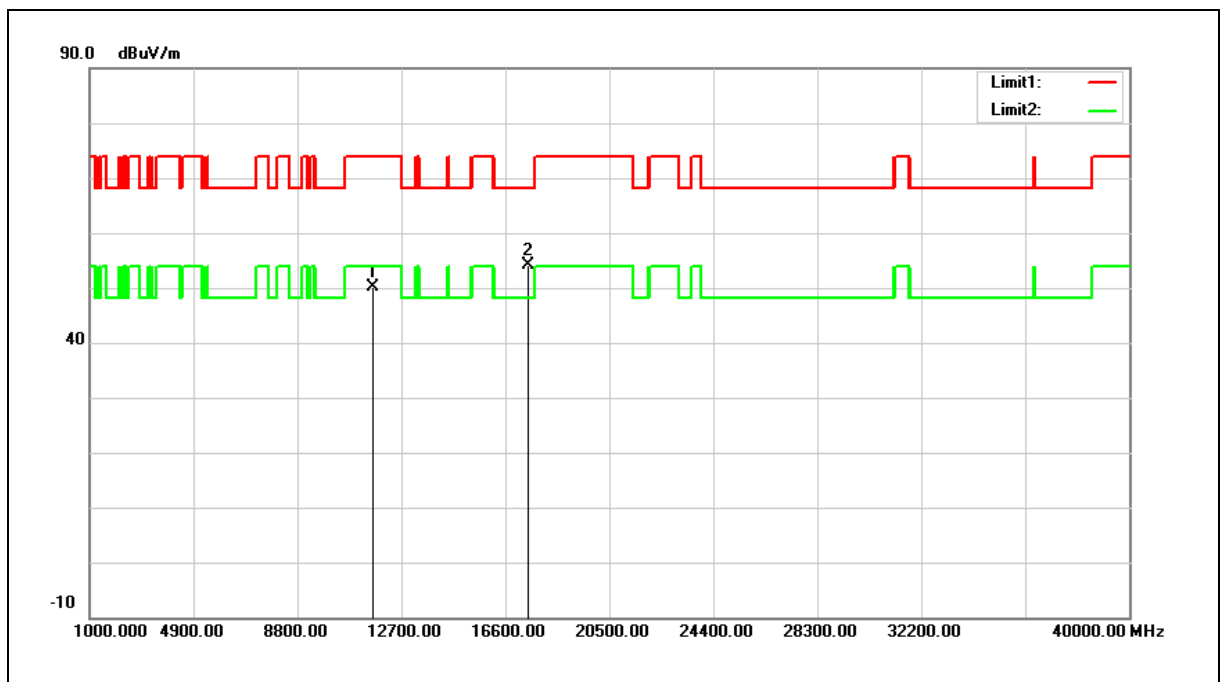


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	44.51	5.64	50.15	74.00	-23.85	peak
2	17475.000	42.95	11.22	54.17	68.20	-14.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

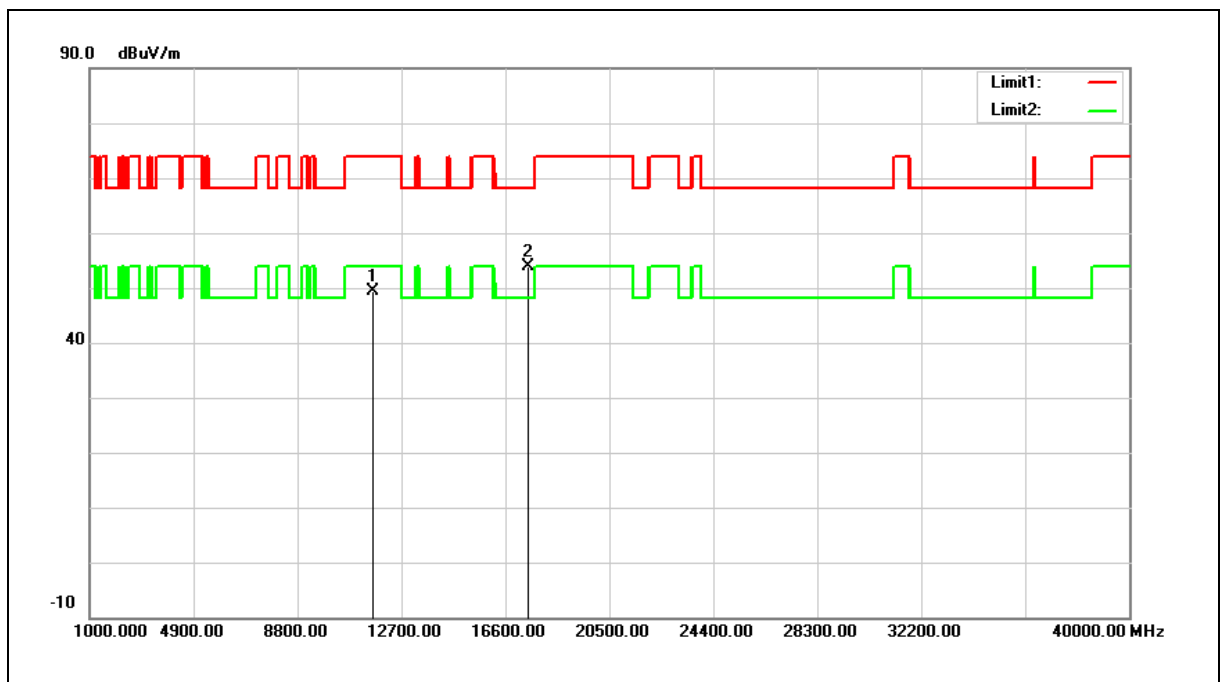


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	43.75	5.64	49.39	74.00	-24.61	peak
2	17475.000	42.55	11.22	53.77	68.20	-14.43	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

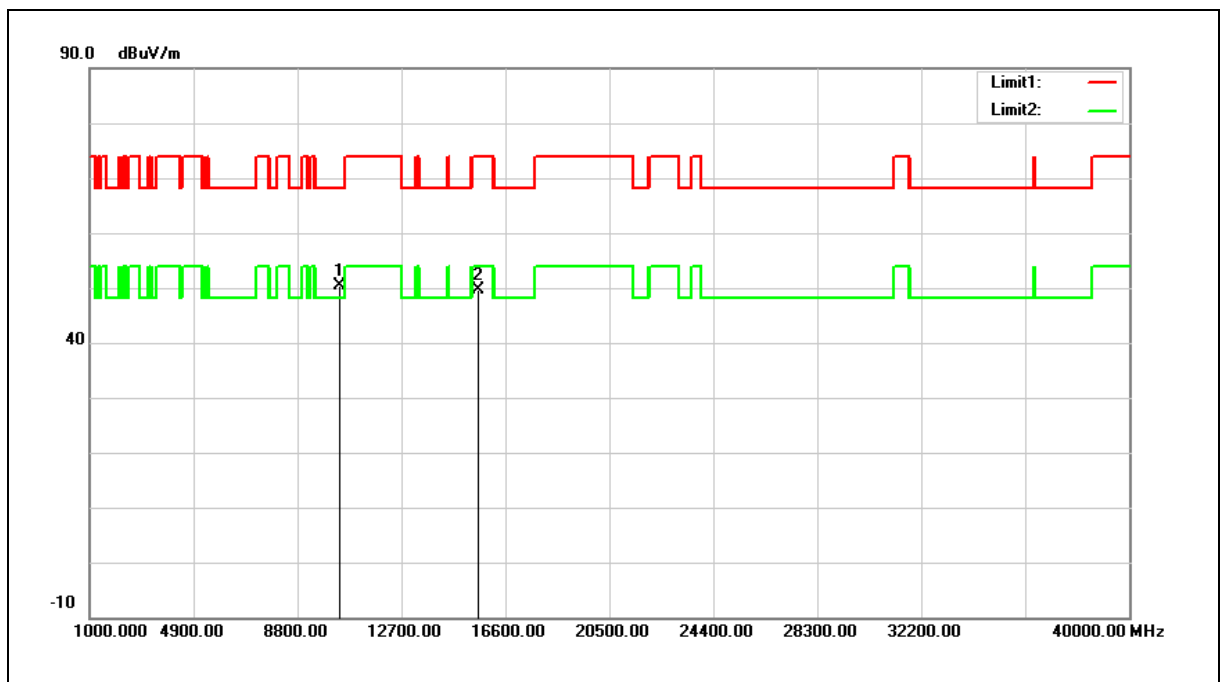


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	45.75	4.58	50.33	68.20	-17.87	peak
2	15570.000	41.94	7.61	49.55	74.00	-24.45	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

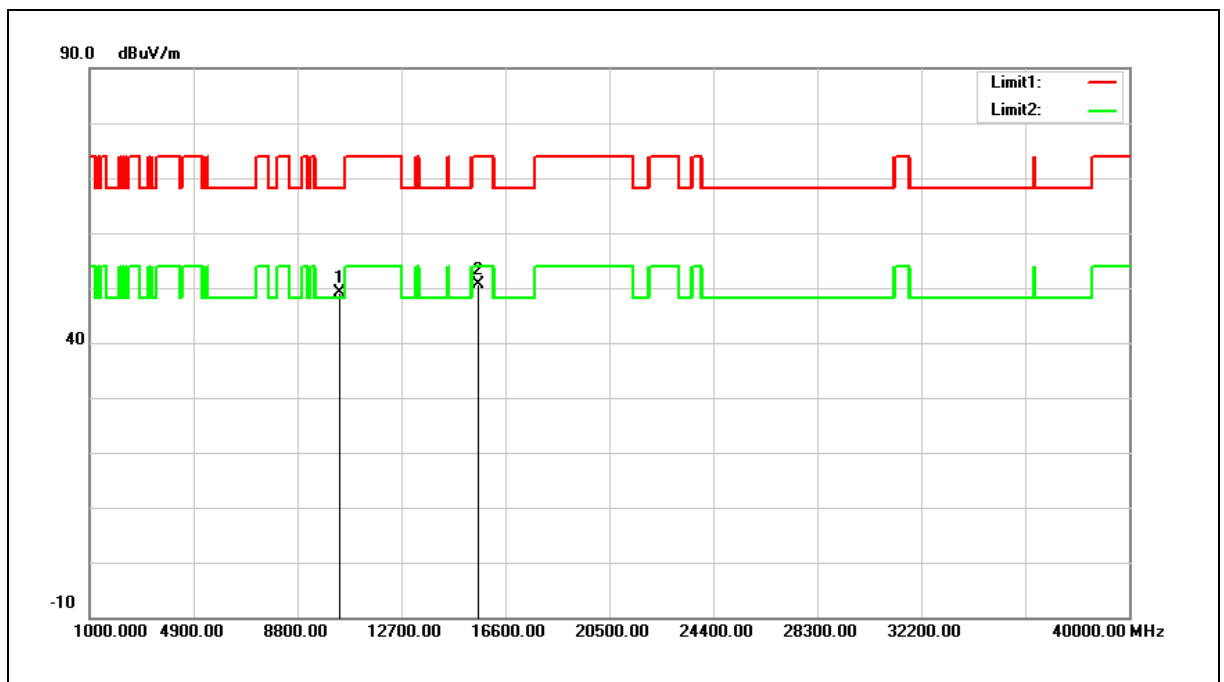


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	44.55	4.58	49.13	68.20	-19.07	peak
2	15570.000	43.12	7.61	50.73	74.00	-23.27	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

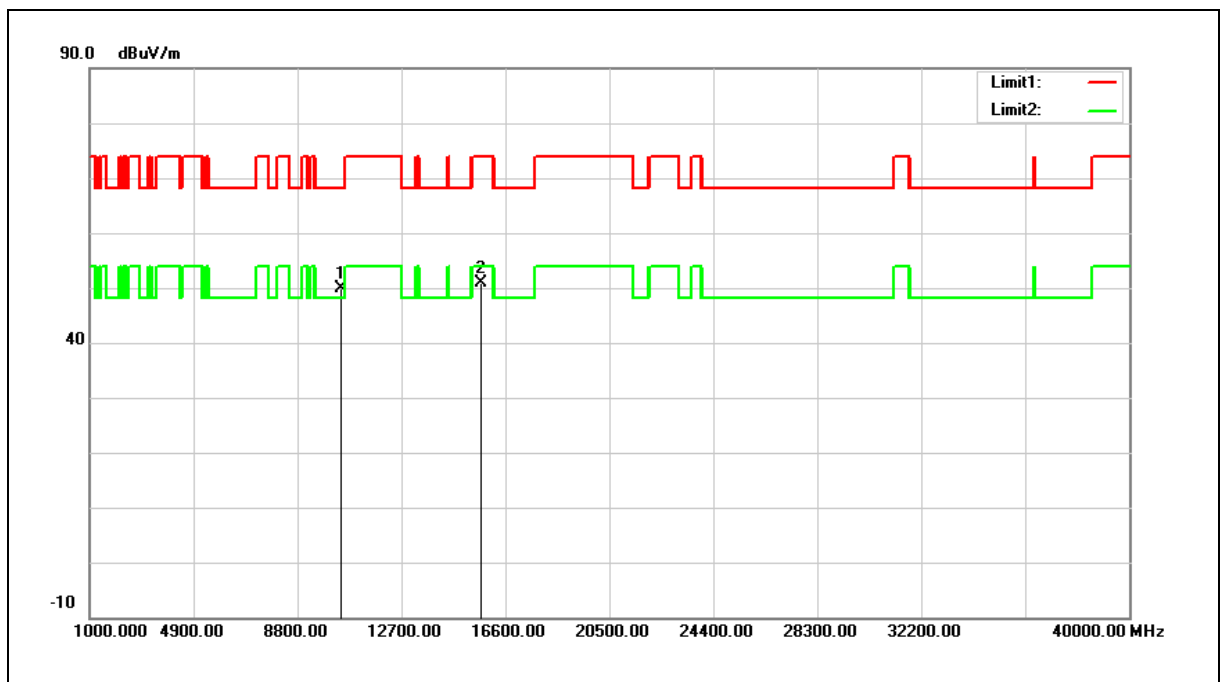


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	45.08	4.74	49.82	68.20	-18.38	peak
2	15690.000	43.52	7.36	50.88	74.00	-23.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

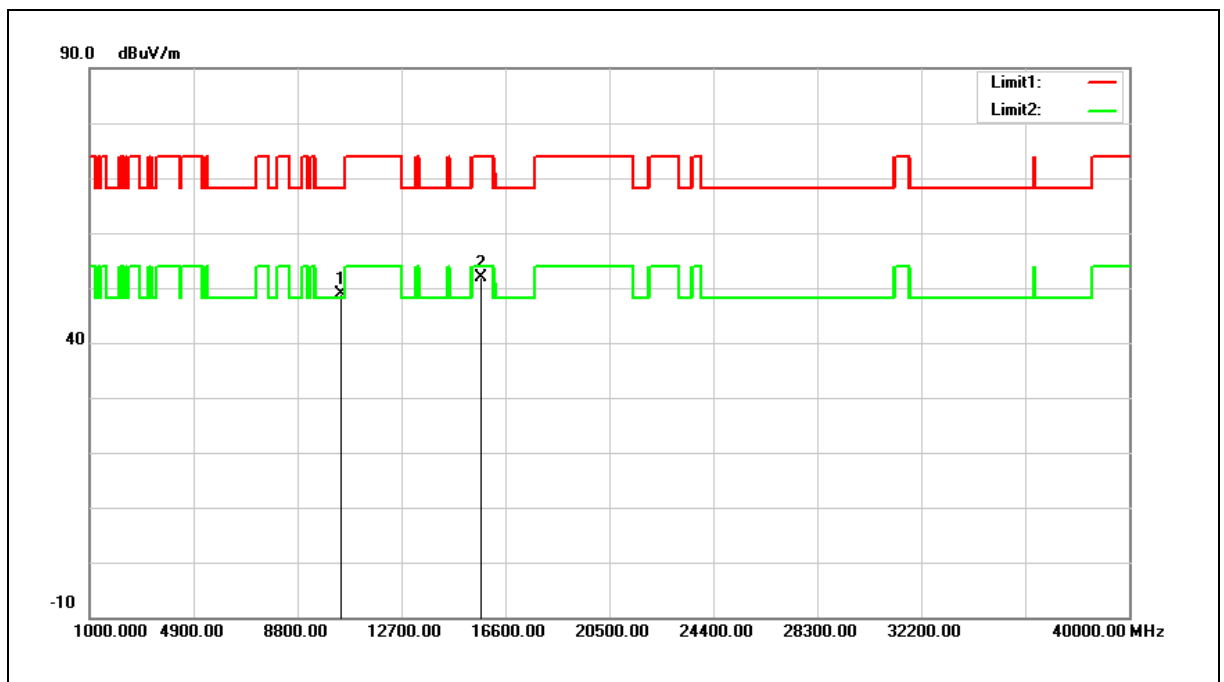


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	44.20	4.74	48.94	68.20	-19.26	peak
2	15690.000	44.58	7.36	51.94	74.00	-22.06	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

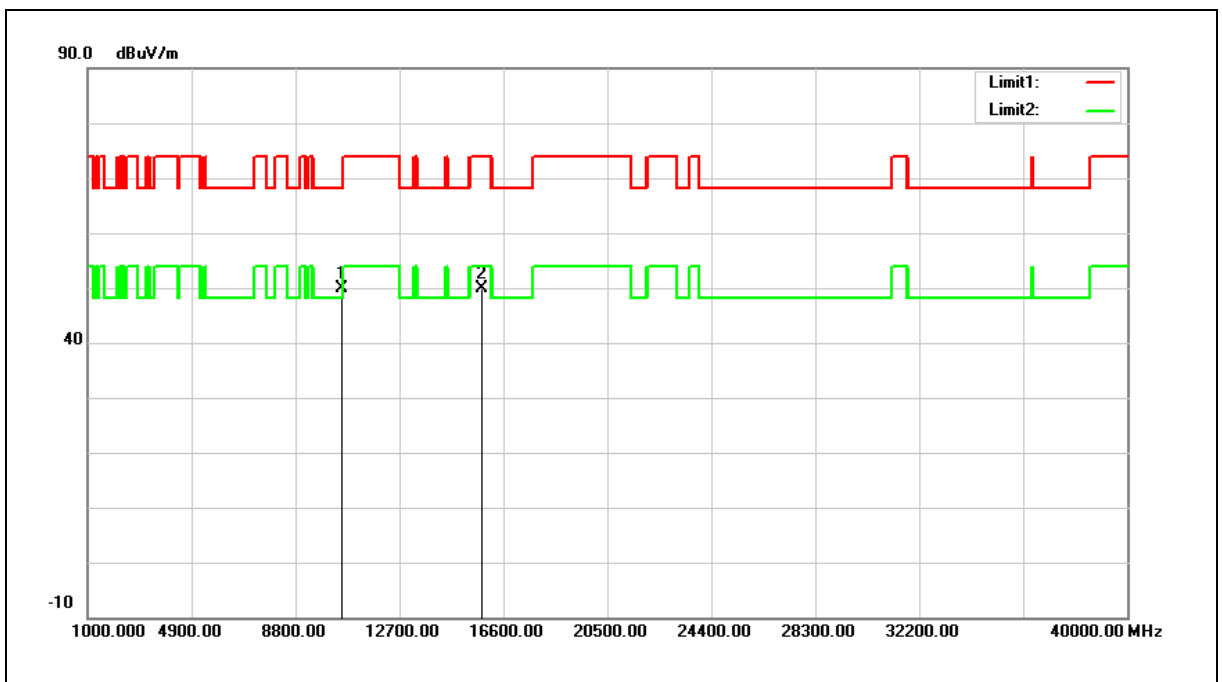


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	45.06	4.84	49.90	68.20	-18.30	peak
2	15810.000	42.71	7.14	49.85	74.00	-24.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

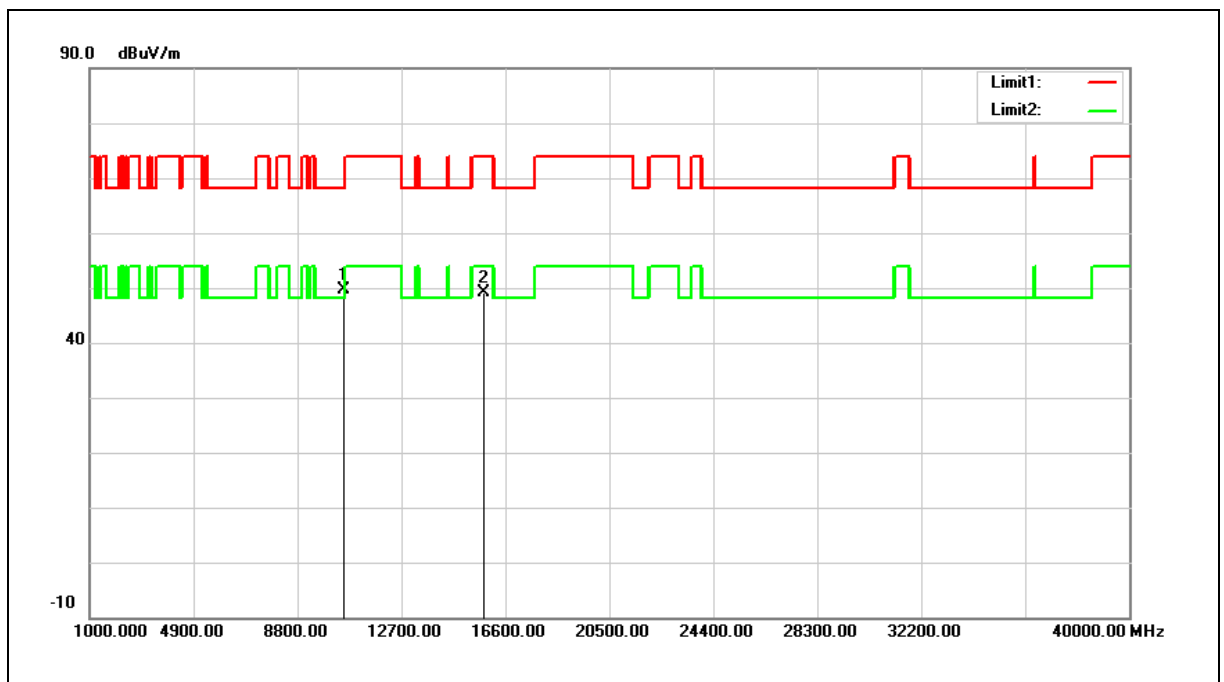


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	44.75	4.84	49.59	68.20	-18.61	peak
2	15810.000	41.90	7.14	49.04	74.00	-24.96	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

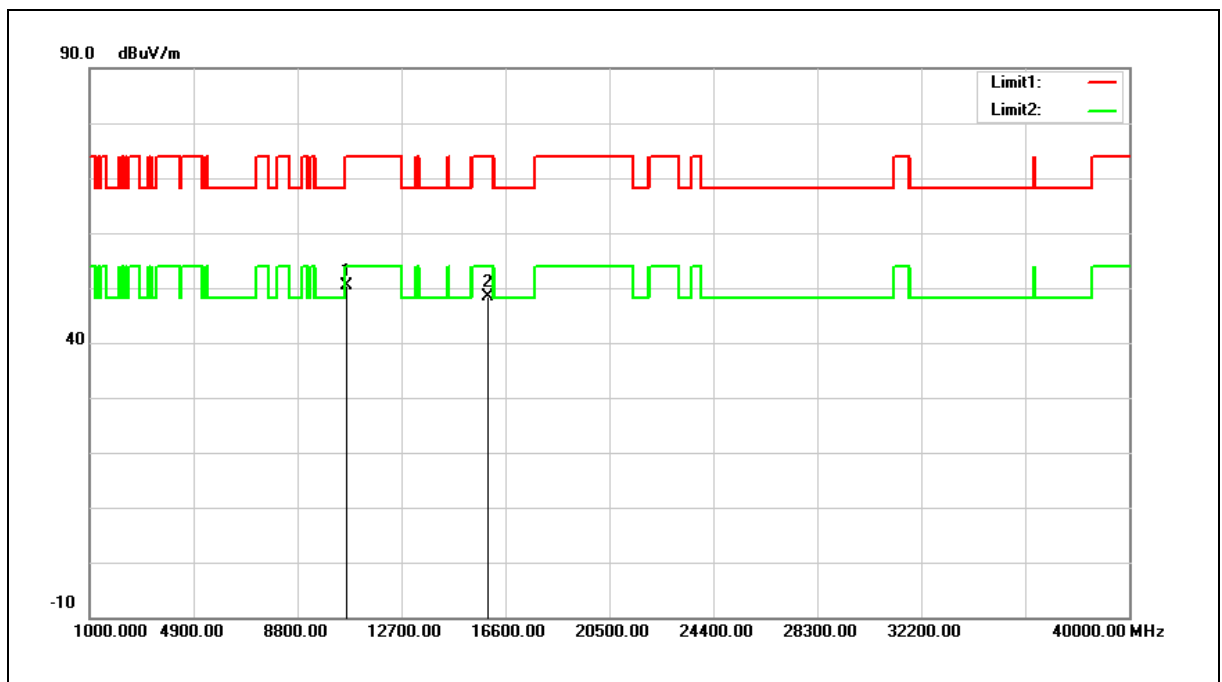


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	45.49	4.89	50.38	74.00	-23.62	peak
2	15930.000	41.40	6.89	48.29	74.00	-25.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

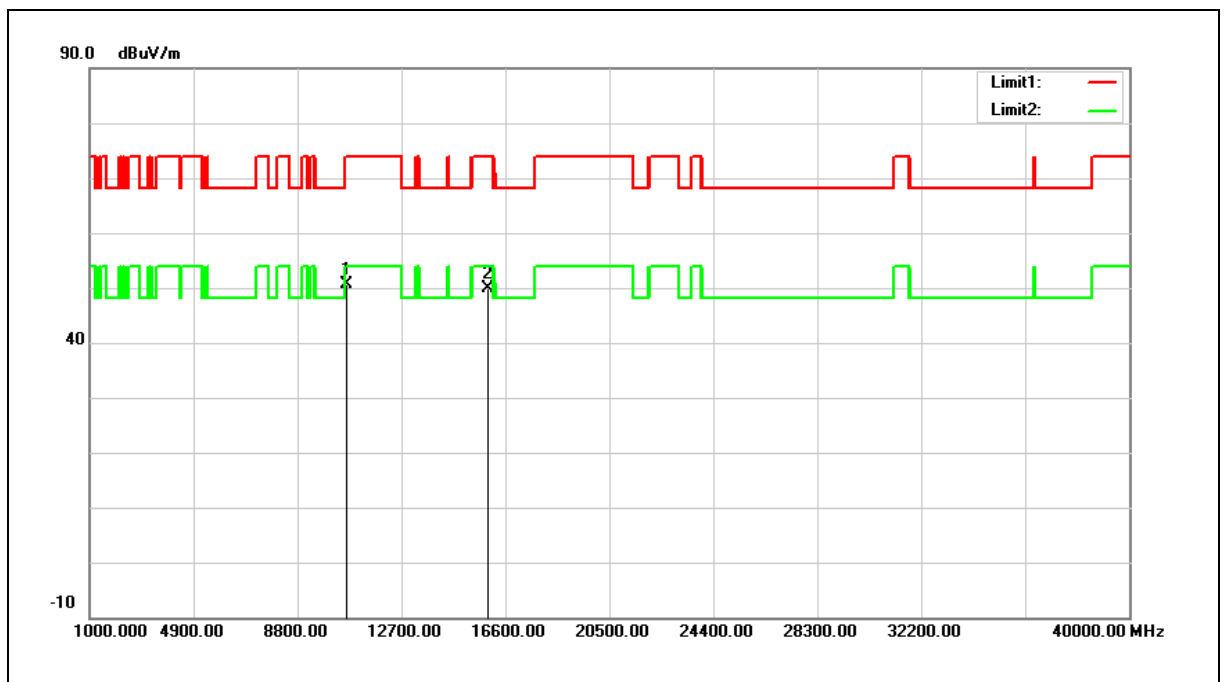


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	45.76	4.89	50.65	74.00	-23.35	peak
2	15930.000	42.89	6.89	49.78	74.00	-24.22	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

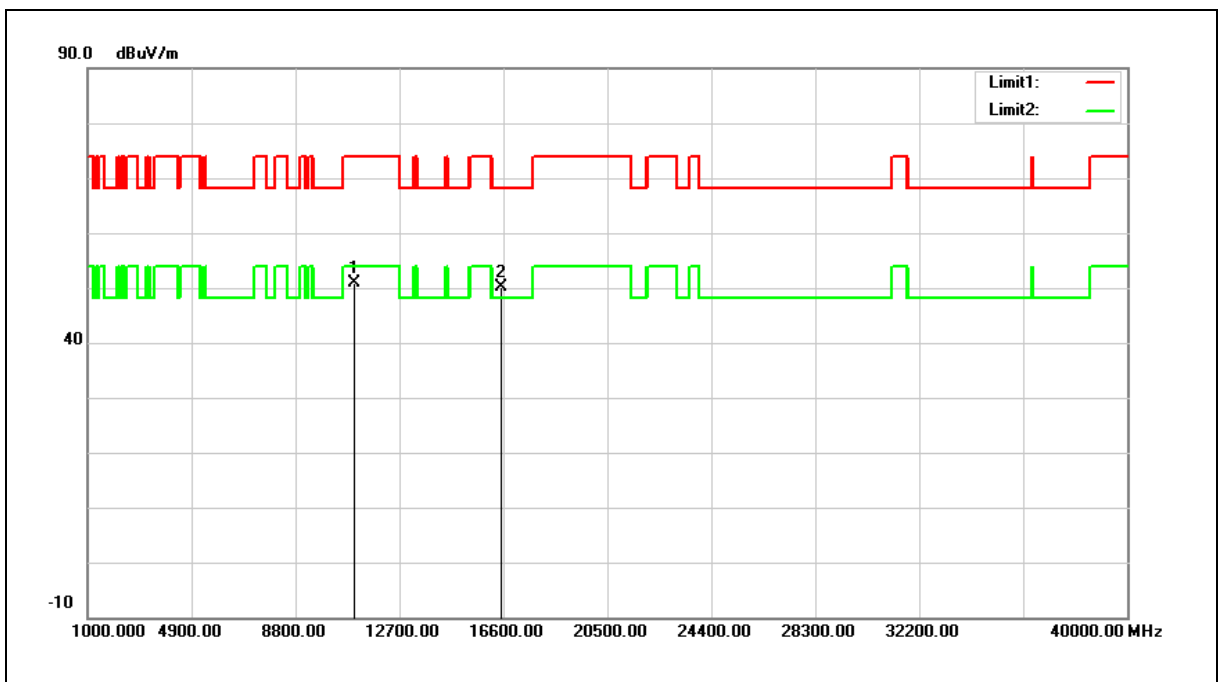


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	45.62	5.18	50.80	74.00	-23.20	peak
2	16530.000	41.89	8.29	50.18	68.20	-18.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

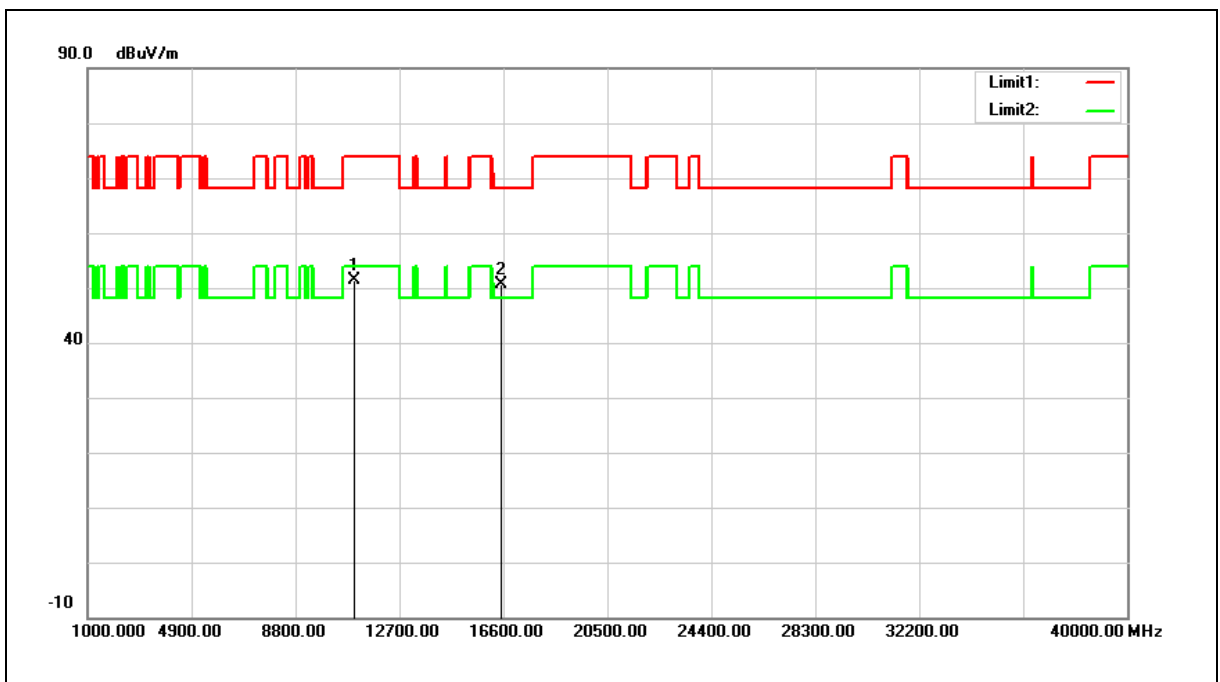


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	46.25	5.18	51.43	74.00	-22.57	peak
2	16530.000	42.24	8.29	50.53	68.20	-17.67	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

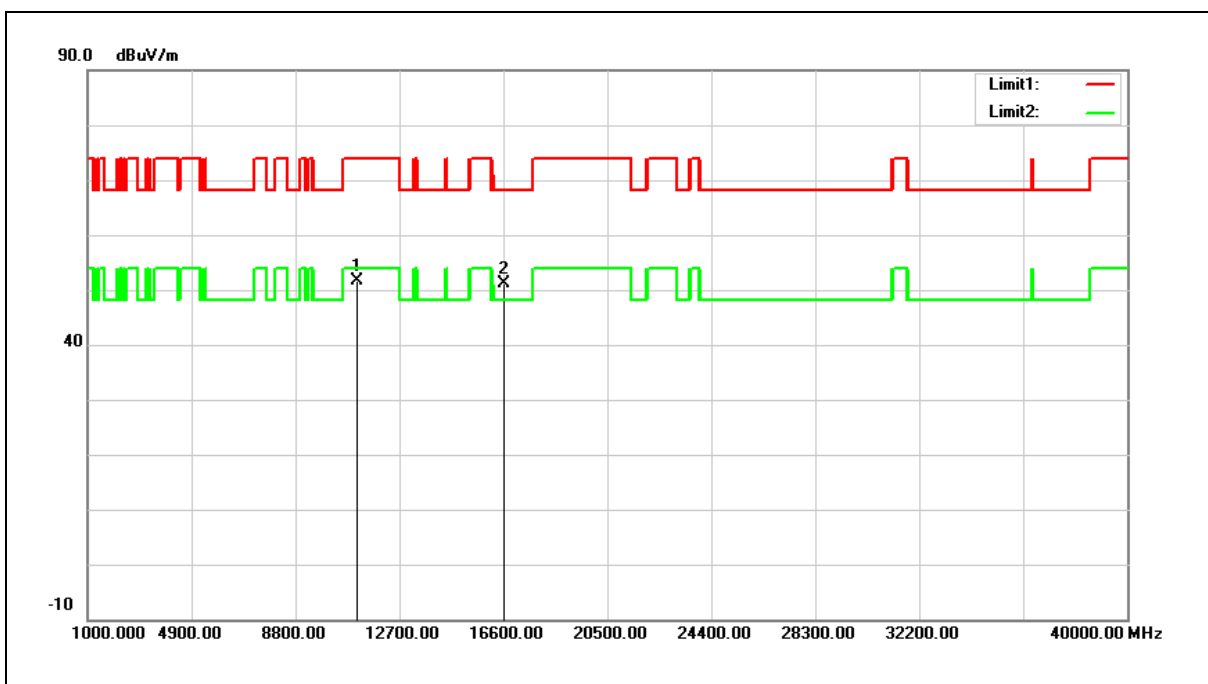


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	46.28	5.28	51.56	74.00	-22.44	peak
2	16650.000	42.41	8.73	51.14	68.20	-17.06	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

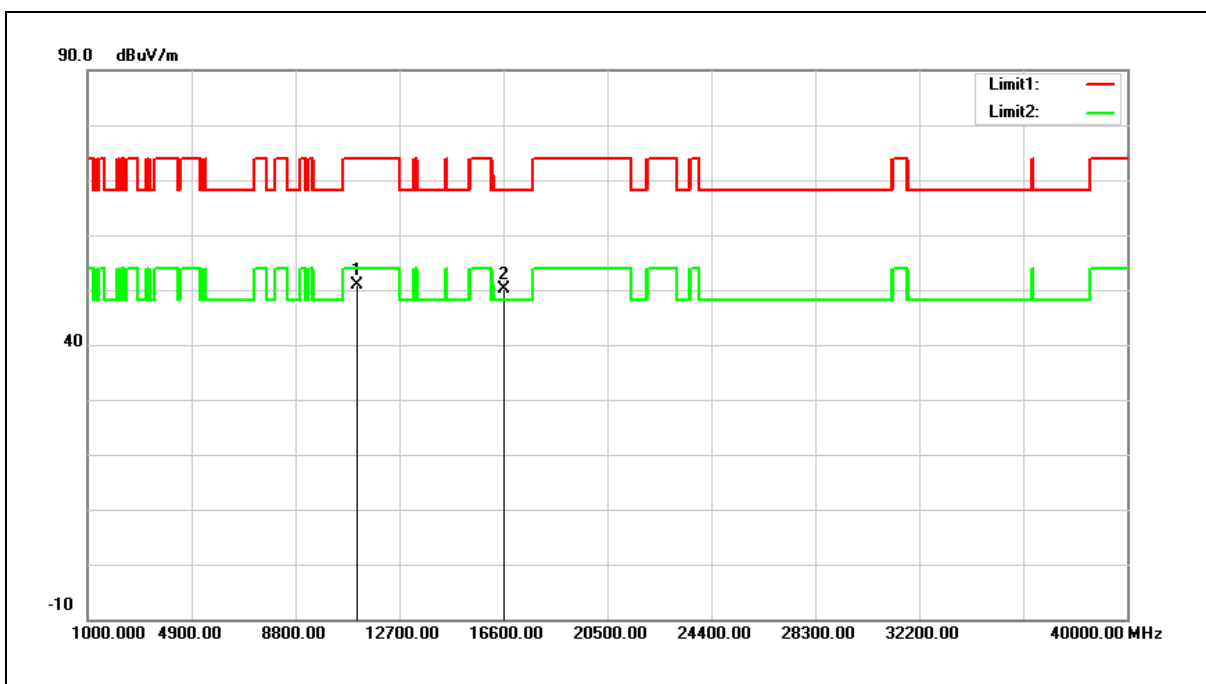


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	45.59	5.28	50.87	74.00	-23.13	peak
2	16650.000	41.32	8.73	50.05	68.20	-18.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

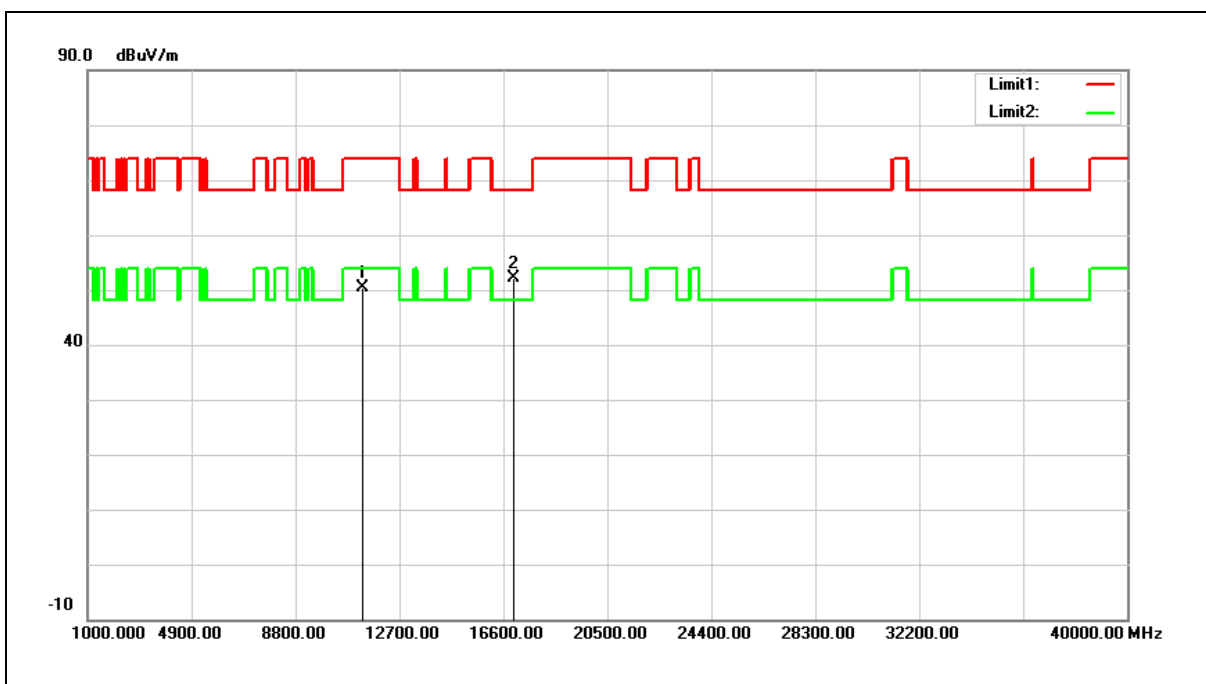


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	44.72	5.56	50.28	74.00	-23.72	peak
2	17010.000	42.11	10.04	52.15	68.20	-16.05	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

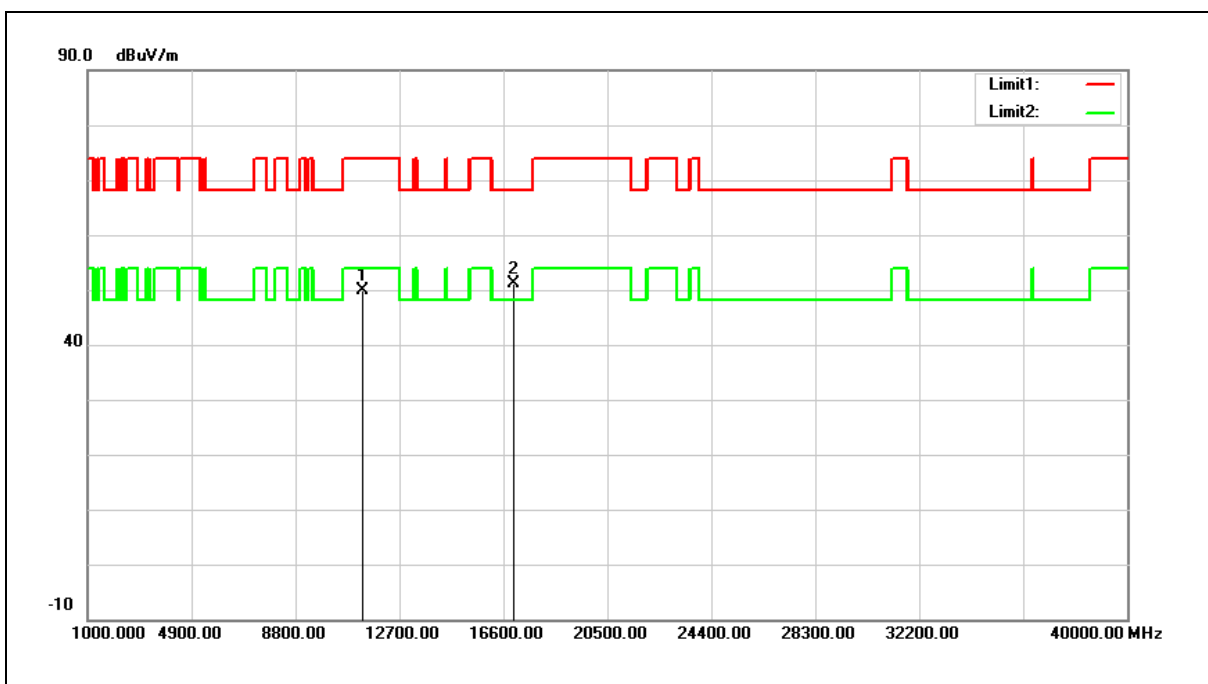


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	44.21	5.56	49.77	74.00	-24.23	peak
2	17010.000	41.02	10.04	51.06	68.20	-17.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

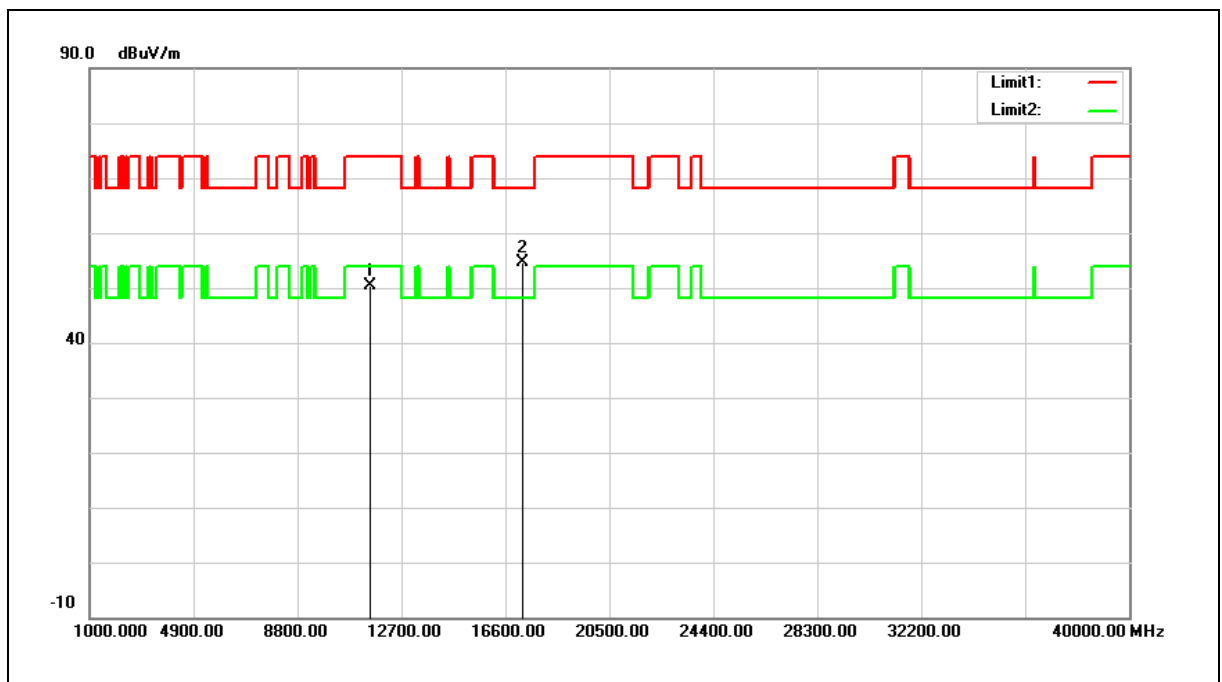


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	44.66	5.74	50.40	74.00	-23.60	peak
2	17265.000	43.98	10.69	54.67	68.20	-13.53	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

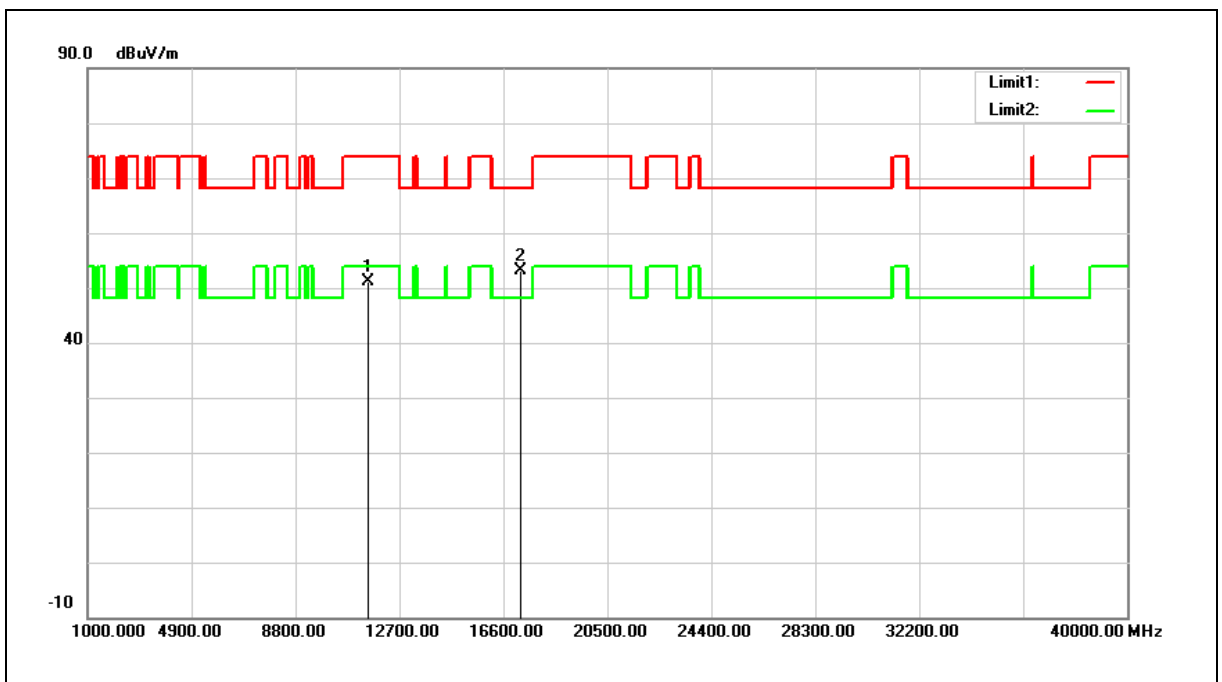


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	45.44	5.74	51.18	74.00	-22.82	peak
2	17265.000	42.46	10.69	53.15	68.20	-15.05	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

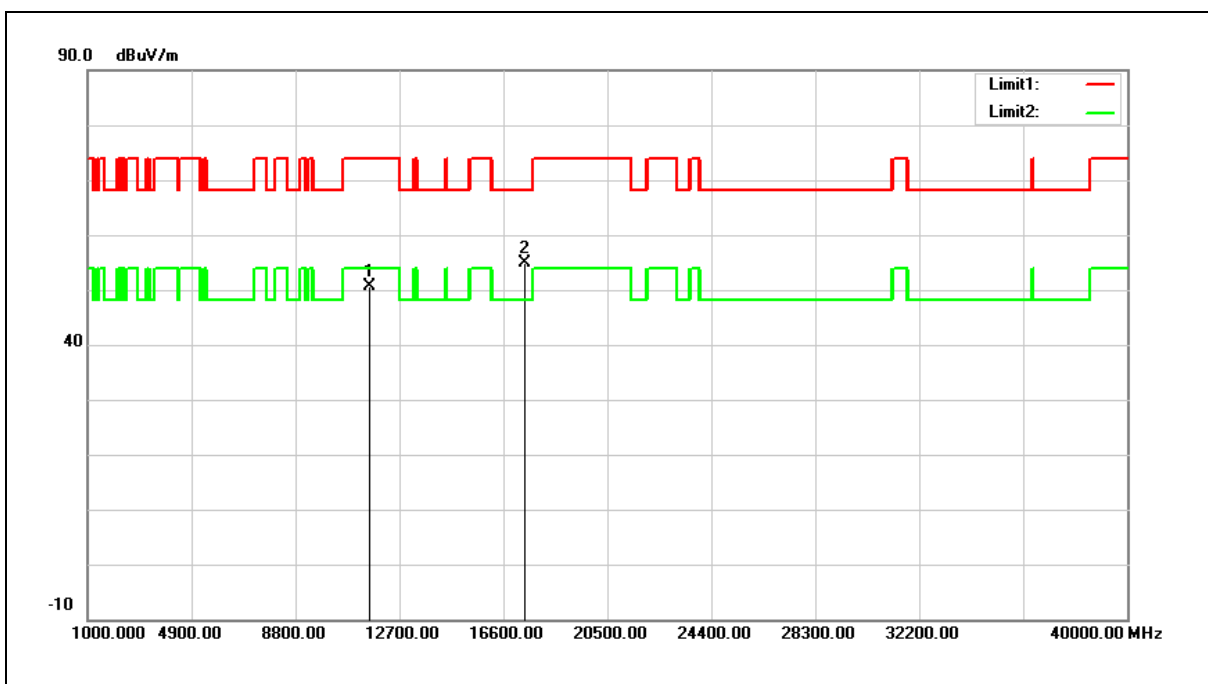


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	44.93	5.69	50.62	74.00	-23.38	peak
2	17385.000	43.98	10.99	54.97	68.20	-13.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

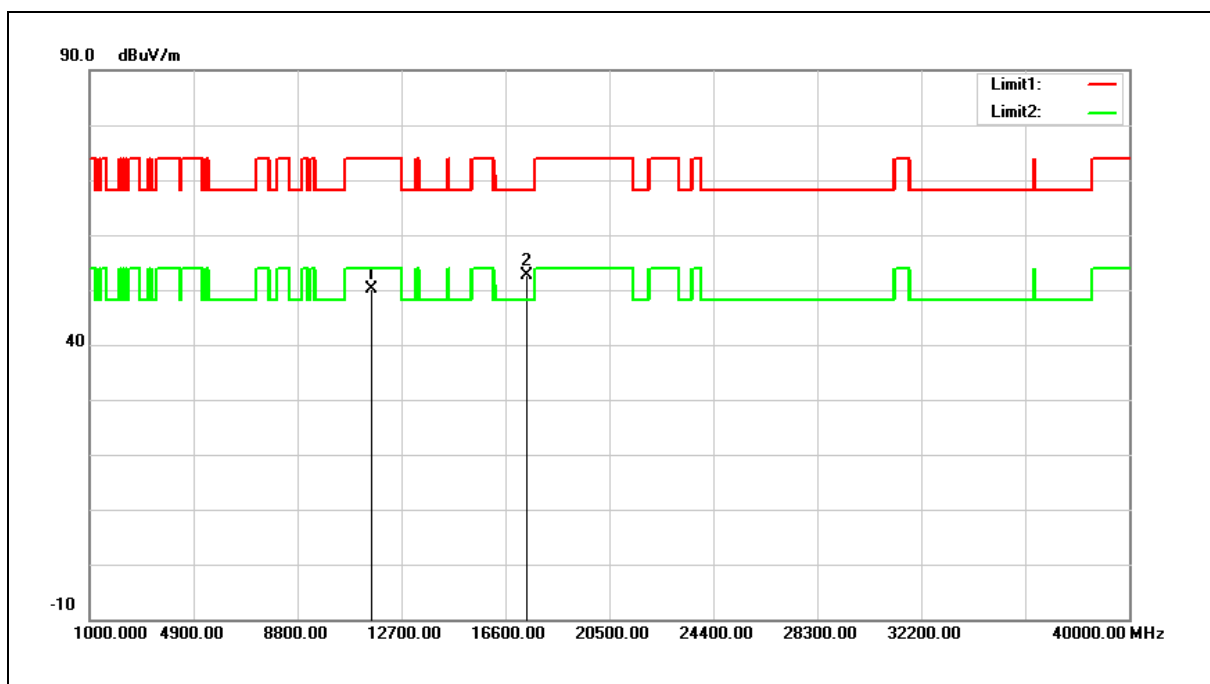


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	44.32	5.69	50.01	74.00	-23.99	peak
2	17385.000	41.76	10.99	52.75	68.20	-15.45	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

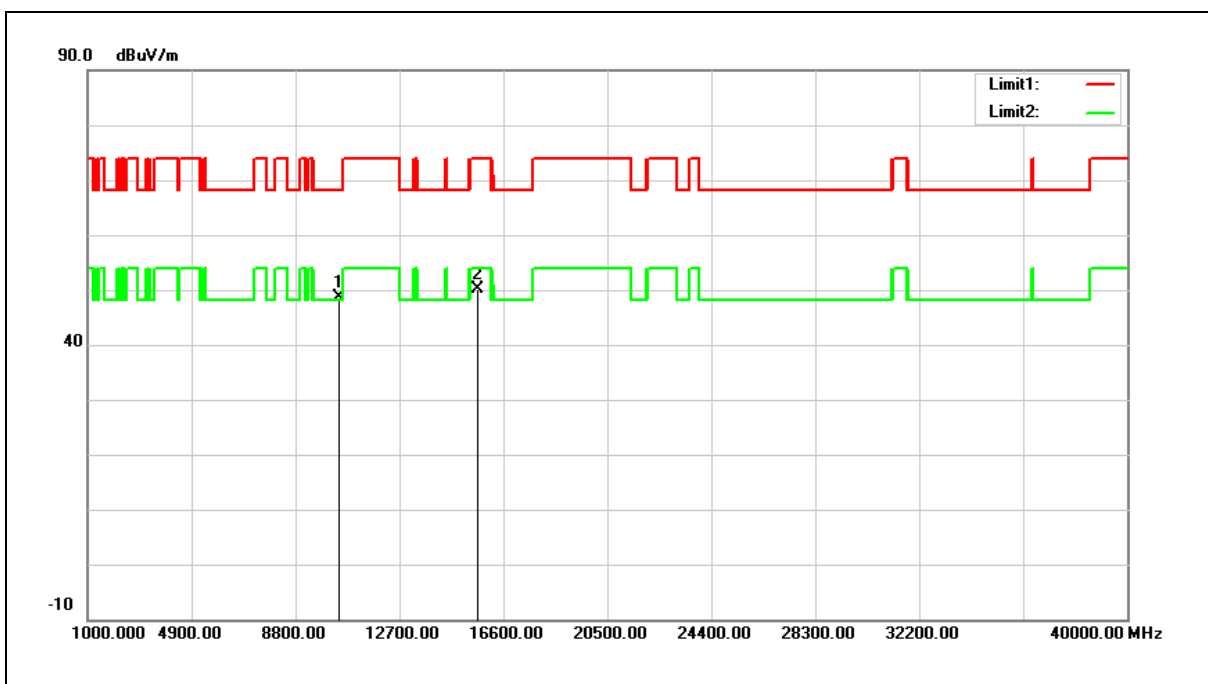


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	43.91	4.65	48.56	68.20	-19.64	peak
2	15630.000	42.59	7.49	50.08	74.00	-23.92	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

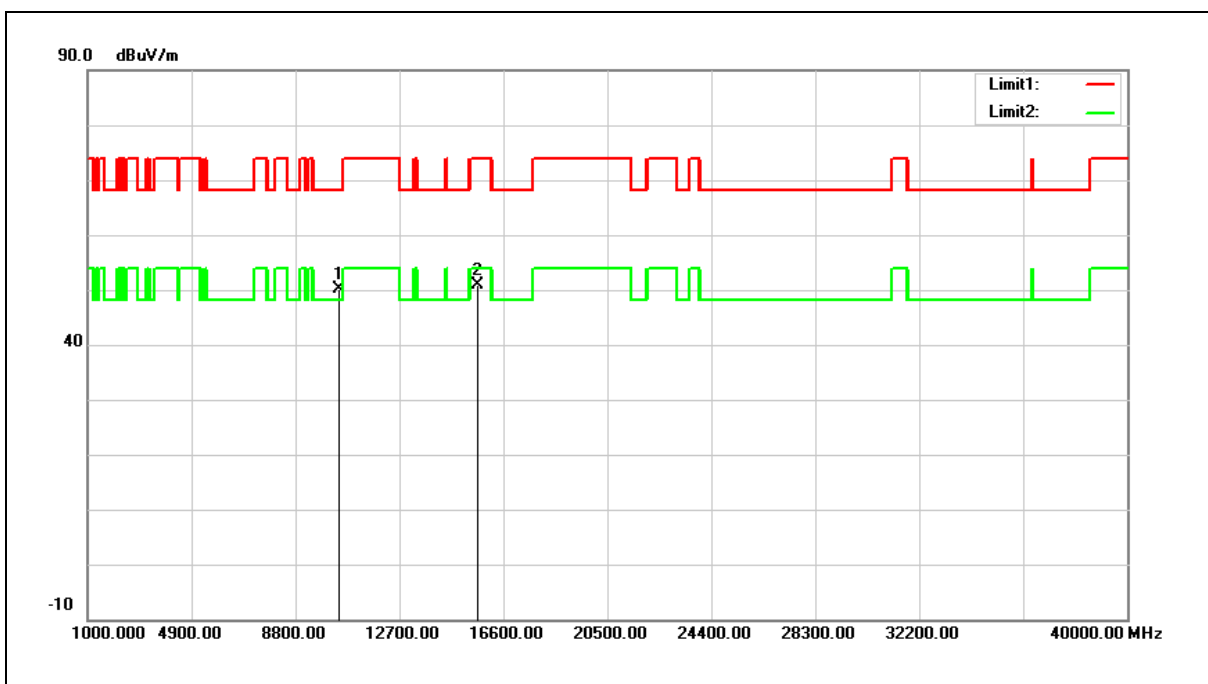


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	45.41	4.65	50.06	68.20	-18.14	peak
2	15630.000	43.42	7.49	50.91	74.00	-23.09	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

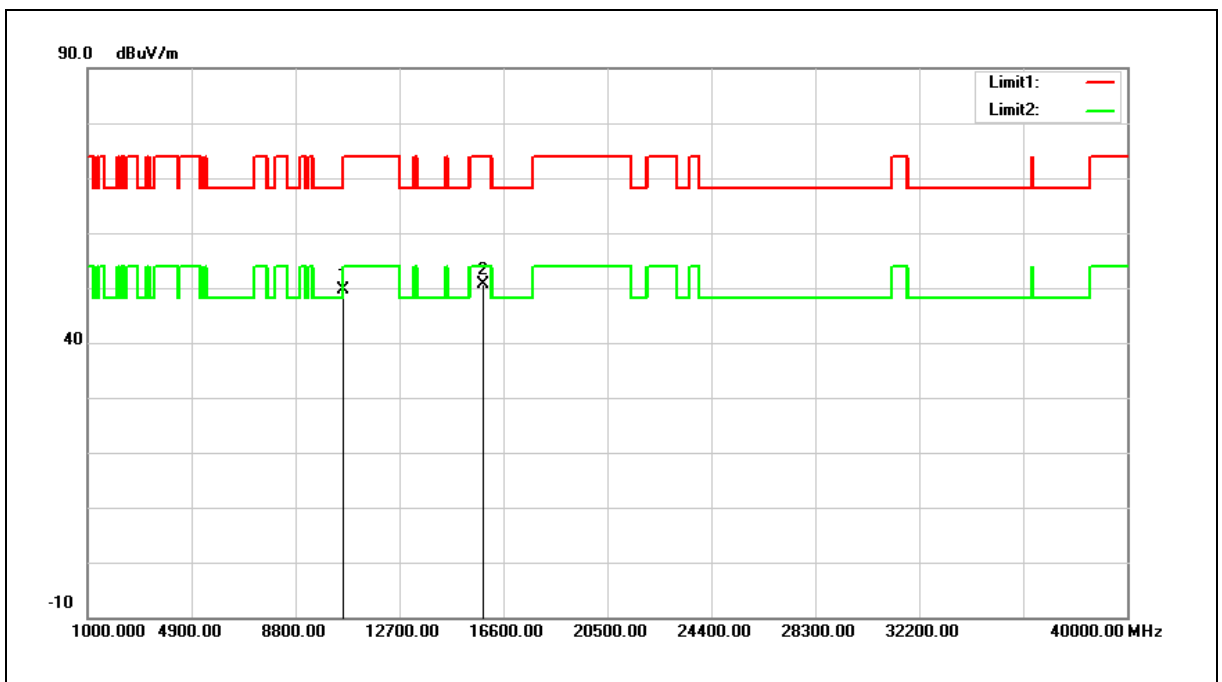


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	44.78	4.87	49.65	68.20	-18.55	peak
2	15870.000	43.60	7.01	50.61	74.00	-23.39	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

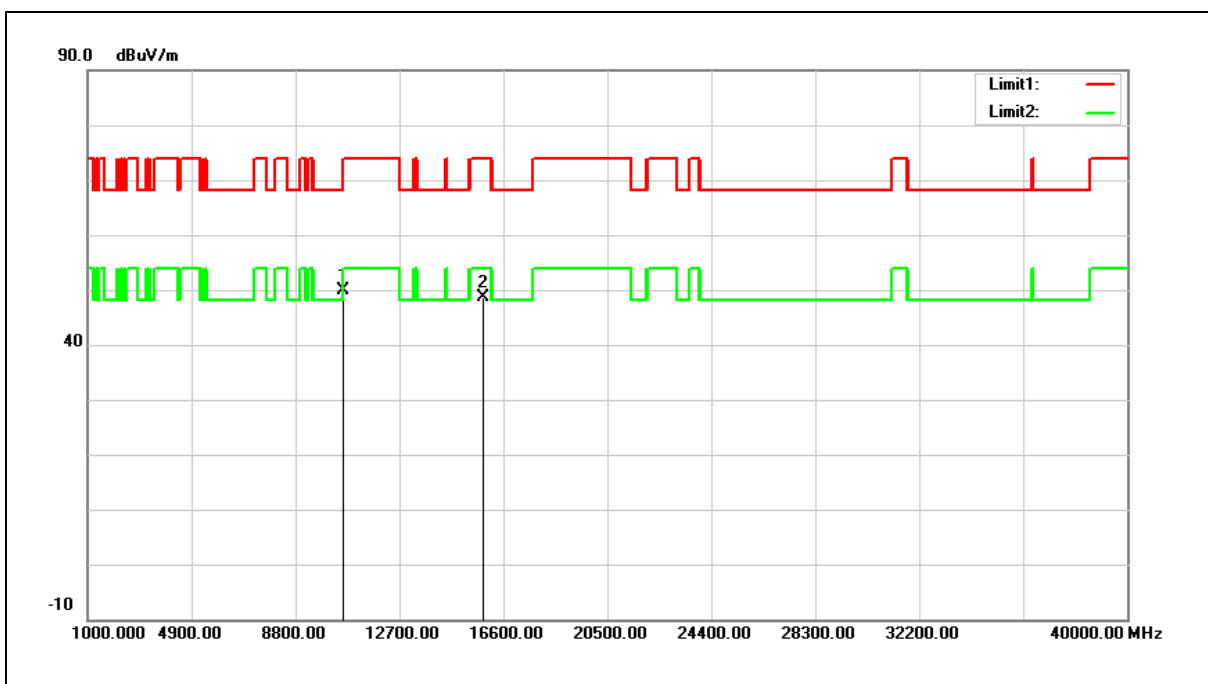


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	45.08	4.87	49.95	68.20	-18.25	peak
2	15870.000	41.73	7.01	48.74	74.00	-25.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

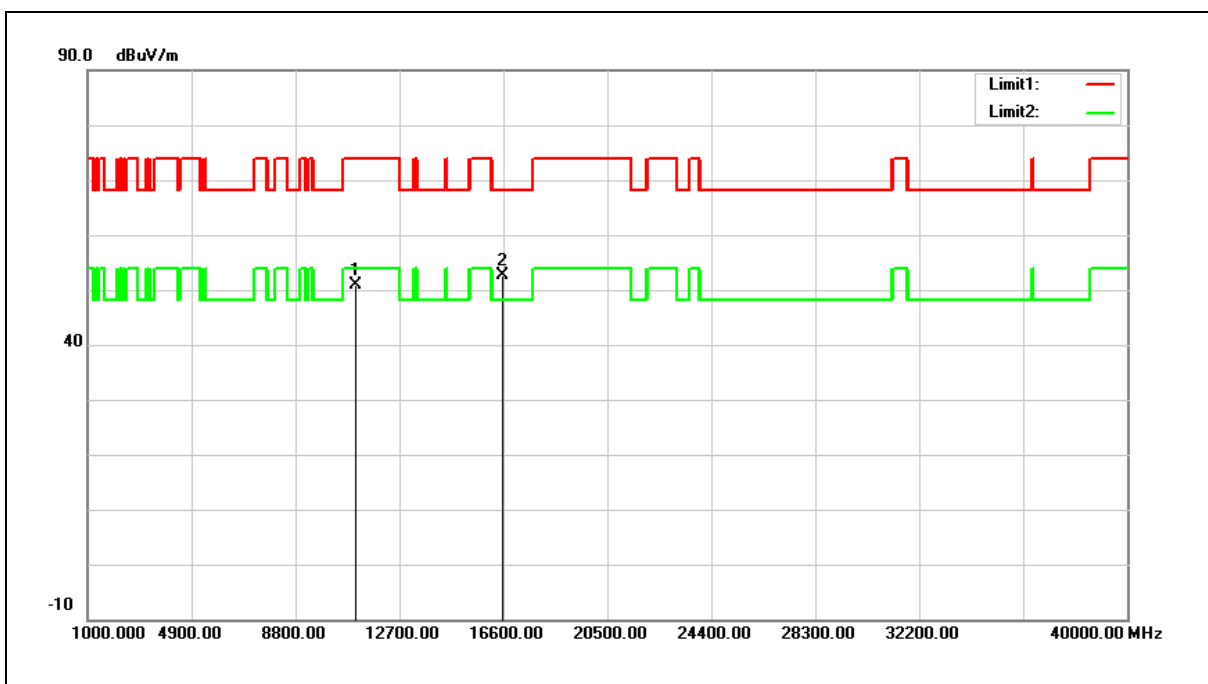


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	45.69	5.23	50.92	74.00	-23.08	peak
2	16590.000	44.04	8.51	52.55	68.20	-15.65	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

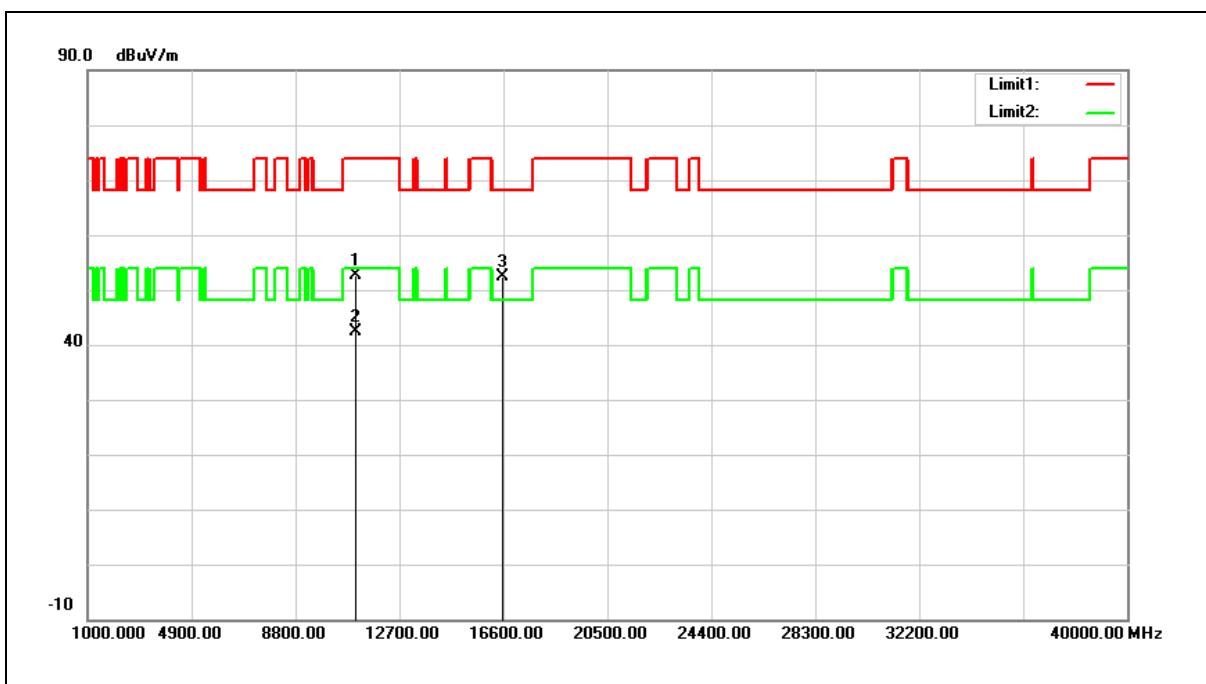


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	47.41	5.23	52.64	74.00	-21.36	peak
2	11060.000	37.26	5.23	42.49	54.00	-11.51	AVG
3	16590.000	43.95	8.51	52.46	68.20	-15.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

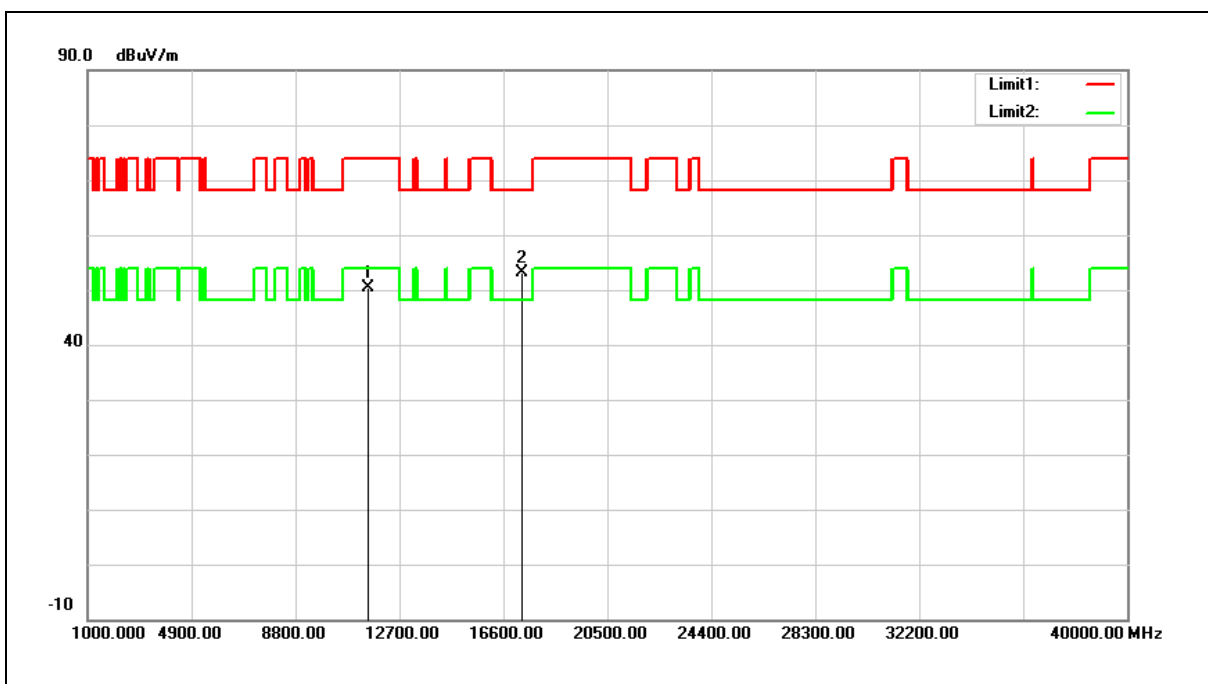


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	44.56	5.71	50.27	74.00	-23.73	peak
2	17325.000	42.37	10.84	53.21	68.20	-14.99	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

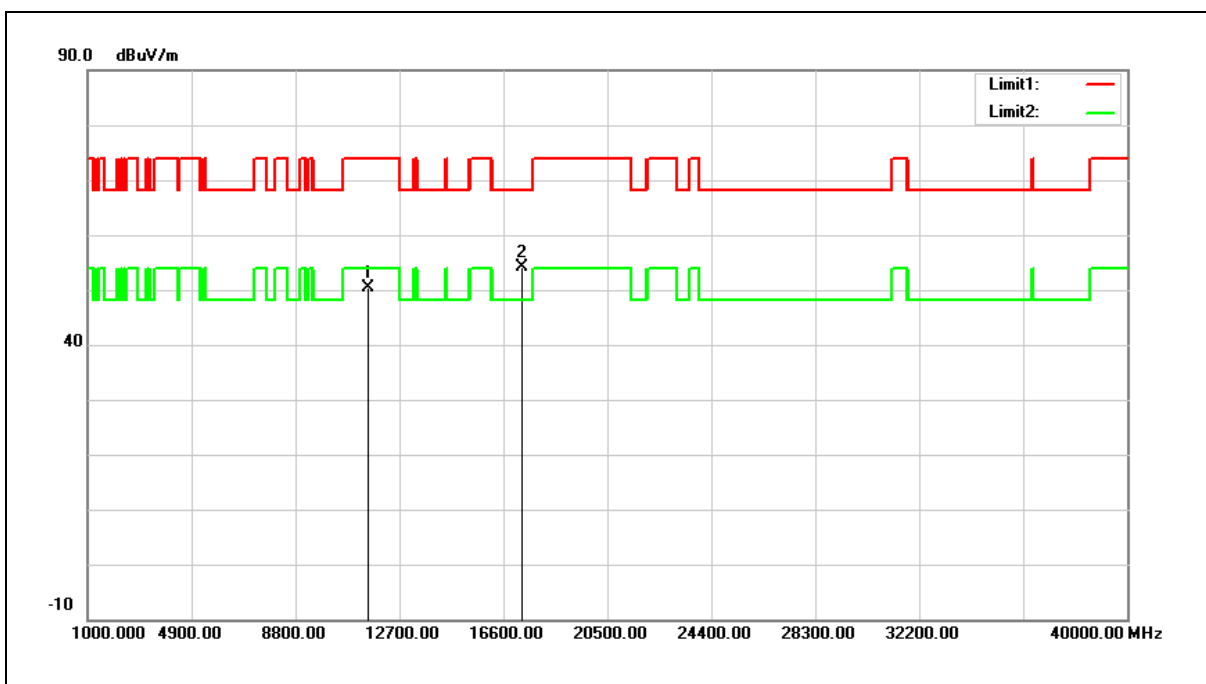


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	44.66	5.71	50.37	74.00	-23.63	peak
2	17325.000	43.33	10.84	54.17	68.20	-14.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5250 MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

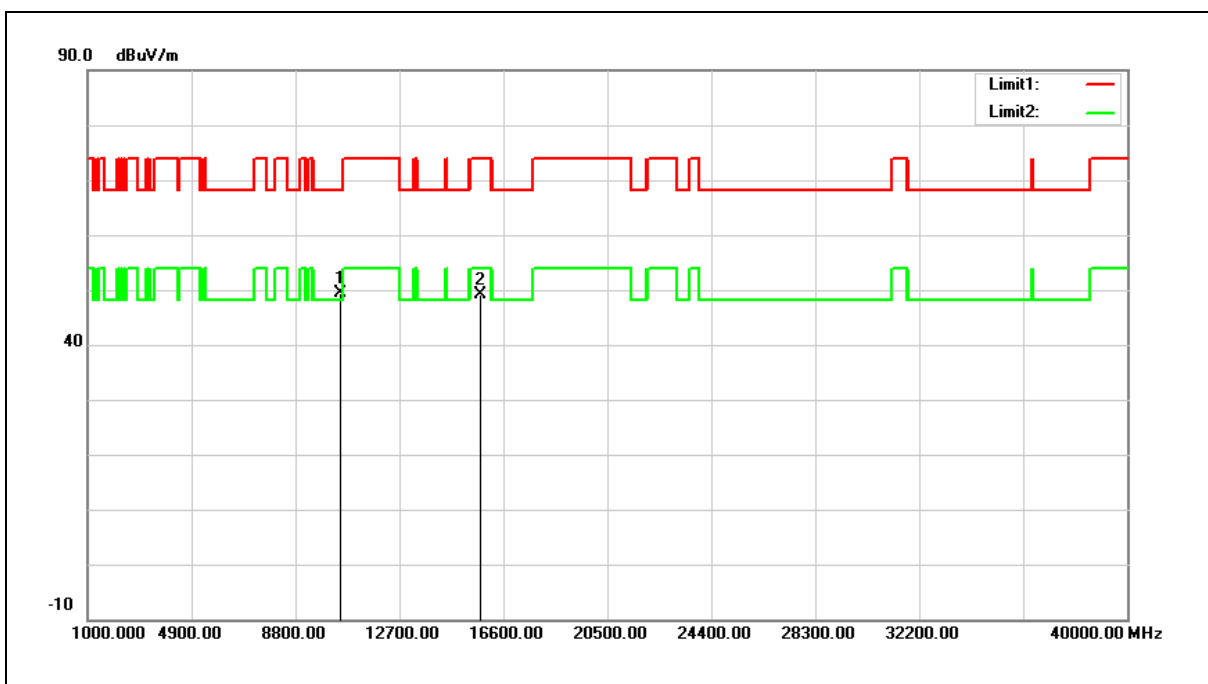


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10500.000	44.53	4.81	49.34	68.20	-18.86	peak
2	15750.000	41.91	7.25	49.16	74.00	-24.84	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5250 MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		

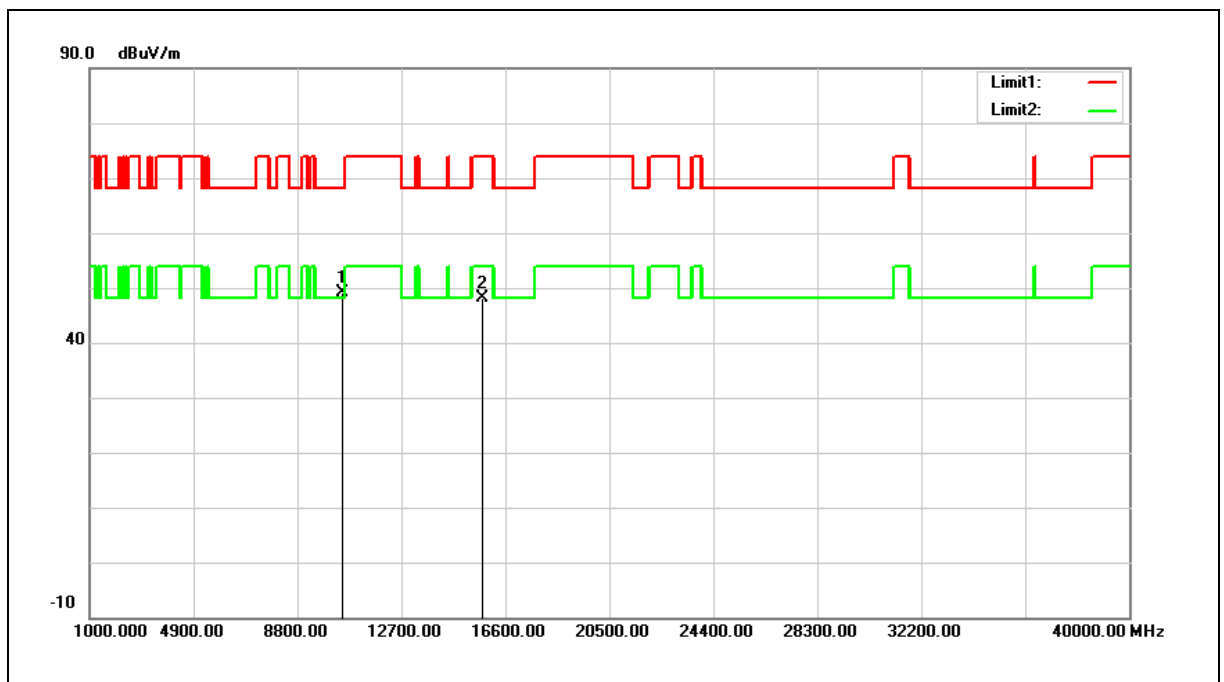


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10500.000	44.36	4.81	49.17	68.20	-19.03	peak
2	15750.000	40.88	7.25	48.13	74.00	-25.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting		
	(WLAN 2.4 + 5 GHz+ Bluetooth)		
Ant.Polar.:	Horizontal		

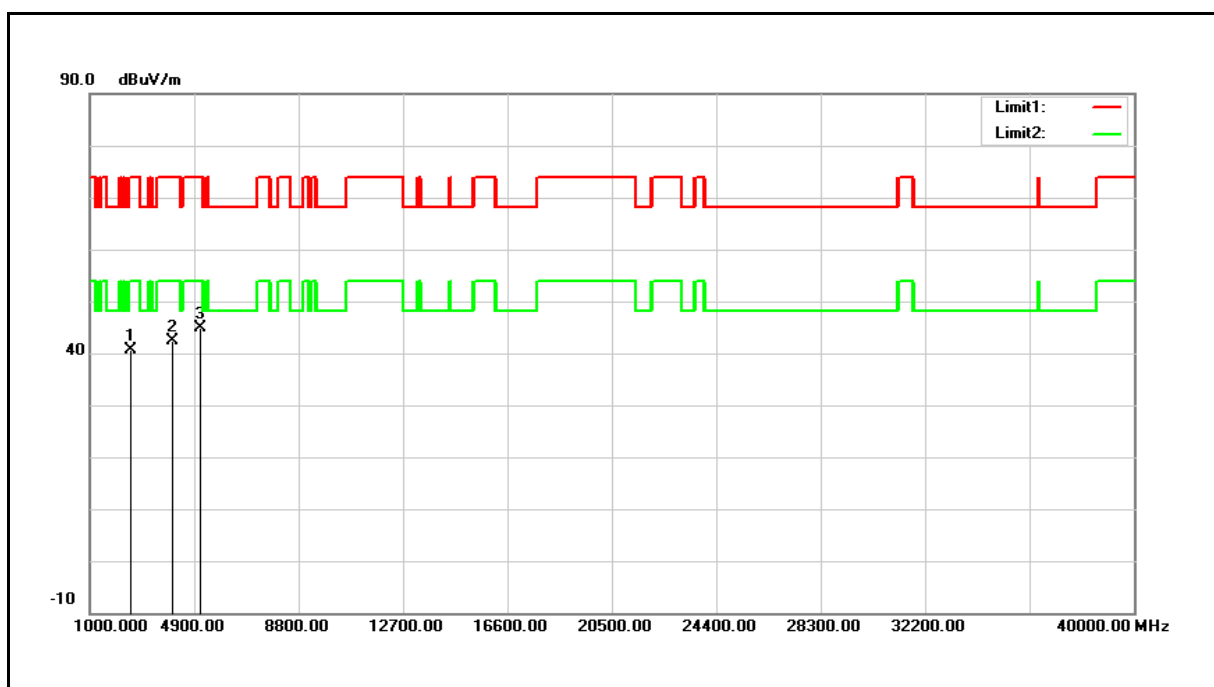


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2513.000	54.41	-13.88	40.53	74.00	-33.47	peak
2	4077.000	52.59	-10.11	42.48	74.00	-31.52	peak
3	5131.000	52.61	-7.74	44.87	74.00	-29.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting		
	(WLAN 2.4 + 5 GHz+ Bluetooth)		
Ant.Polar.:	Vertical		

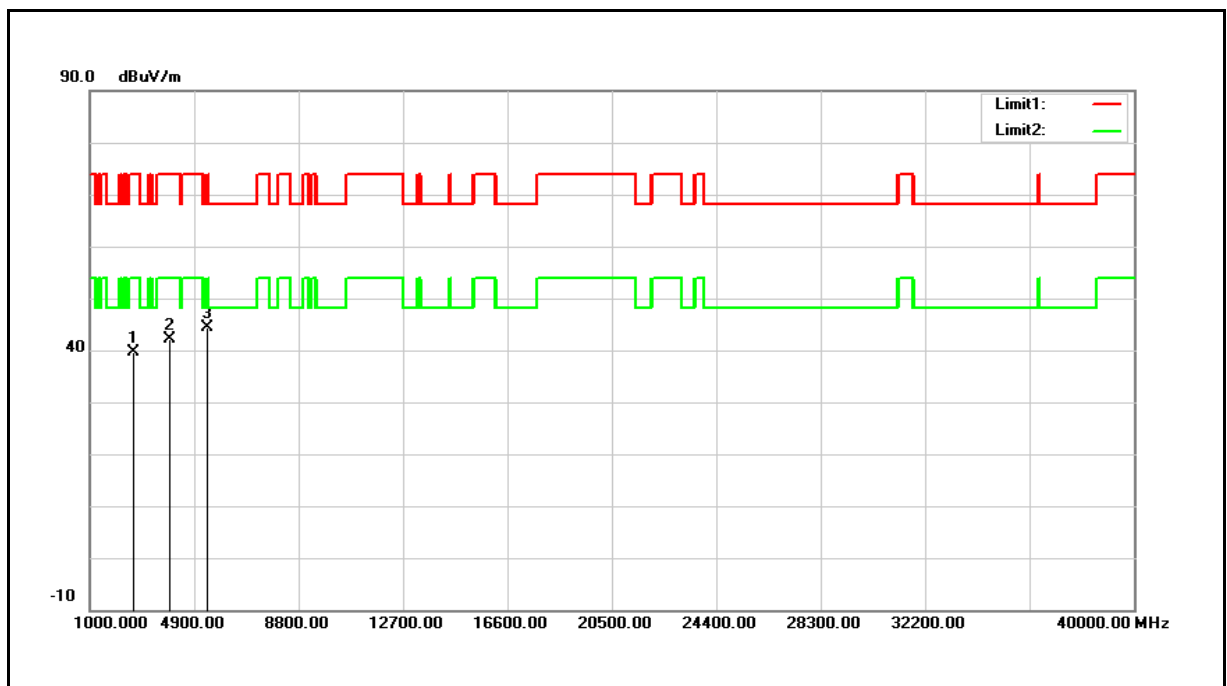


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2615.000	53.31	-13.59	39.72	74.00	-34.28	peak
2	4009.000	52.39	-10.21	42.18	74.00	-31.82	peak
3	5403.000	51.17	-6.91	44.26	74.00	-29.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		
Description:			

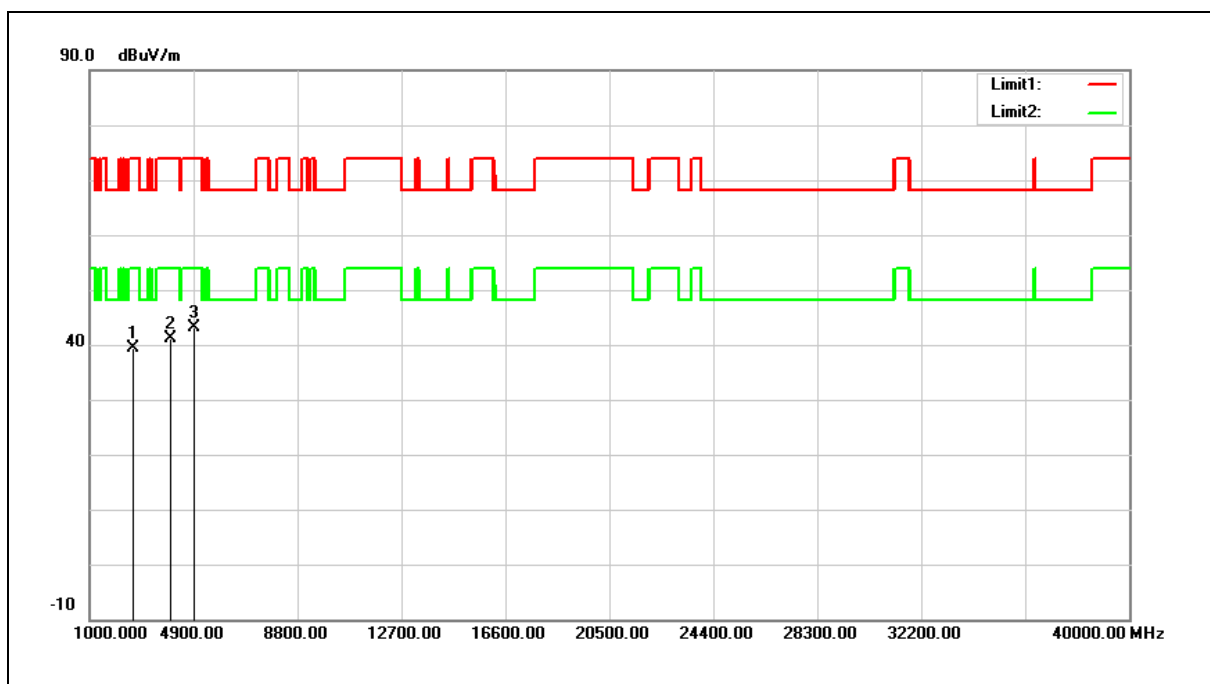


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2615.000	52.95	-13.59	39.36	74.00	-34.64	peak
2	4026.000	51.40	-10.19	41.21	74.00	-32.79	peak
3	4893.000	51.67	-8.43	43.24	74.00	-30.76	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 13		
Ant.Polar.:	Vertical		
Description:			

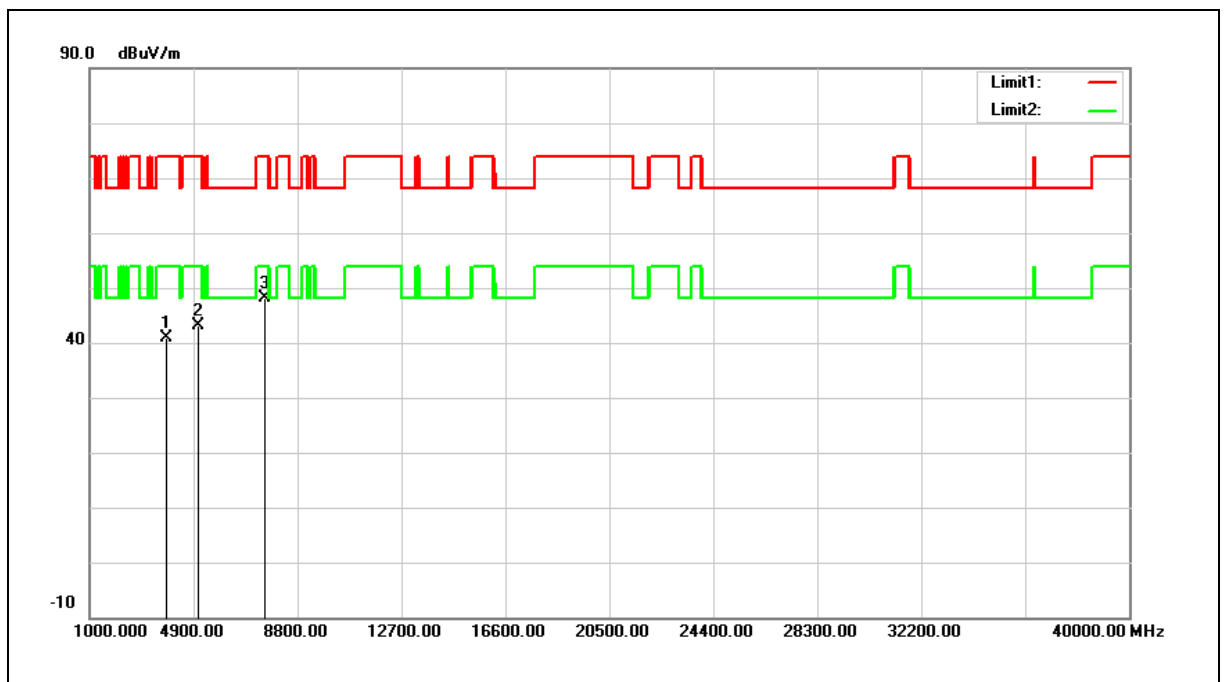

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3907.000	51.33	-10.50	40.83	74.00	-33.17	peak
2	5063.000	51.14	-7.96	43.18	74.00	-30.82	peak
3	7579.000	47.68	0.35	48.03	74.00	-25.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

頻帶邊緣

附註：其上下邊緣落於低功率射頻電機第 2.7 節所列頻帶內之混附發射，其電場強度必須符合第 2.8 節的限制規定。

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

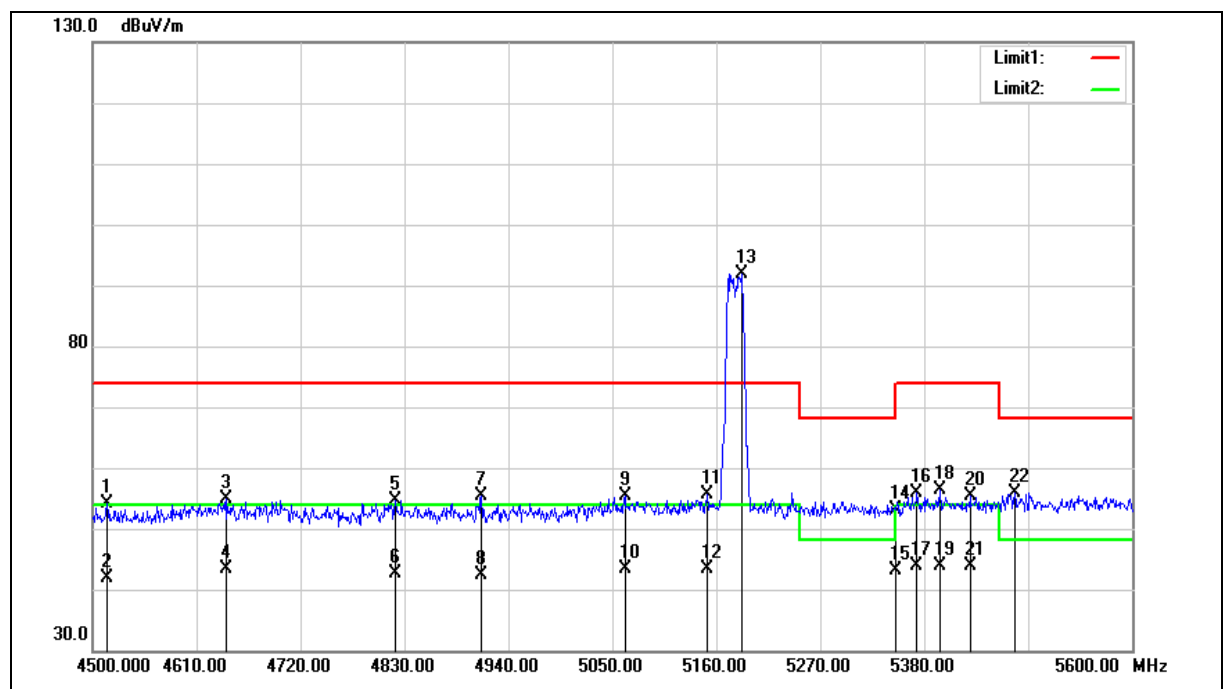

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4515.400	63.58	-9.41	54.17	74.00	-19.83	peak
2	4515.400	51.39	-9.41	41.98	54.00	-12.02	AVG
3	4641.900	63.88	-9.08	54.80	74.00	-19.20	peak
4	4641.900	52.40	-9.08	43.32	54.00	-10.68	AVG
5	4820.100	63.36	-8.63	54.73	74.00	-19.27	peak
6	4820.100	51.33	-8.63	42.70	54.00	-11.30	AVG
7	4911.400	63.84	-8.37	55.47	74.00	-18.53	peak
8	4911.400	50.63	-8.37	42.26	54.00	-11.74	AVG
9	5063.200	63.30	-7.96	55.34	74.00	-18.66	peak
10	5063.200	51.25	-7.96	43.29	54.00	-10.71	AVG
11	5150.000	63.27	-7.69	55.58	74.00	-18.42	peak
12	5150.000	50.98	-7.69	43.29	54.00	-10.71	AVG
13	5186.400	99.50	-7.57	91.93	--	--	peak
14	5350.000	60.17	-7.07	53.10	74.00	-20.90	peak
15	5350.000	50.19	-7.07	43.12	54.00	-10.88	AVG
16	5372.300	62.81	-7.01	55.80	74.00	-18.20	peak
17	5372.300	50.87	-7.01	43.86	54.00	-10.14	AVG
18	5396.500	63.25	-6.93	56.32	74.00	-17.68	peak
19	5396.500	50.78	-6.93	43.85	54.00	-10.15	AVG
20	5428.400	62.32	-6.83	55.49	74.00	-18.51	peak
21	5428.400	50.78	-6.83	43.95	54.00	-10.05	AVG
22	5475.700	62.59	-6.68	55.91	68.20	-12.29	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

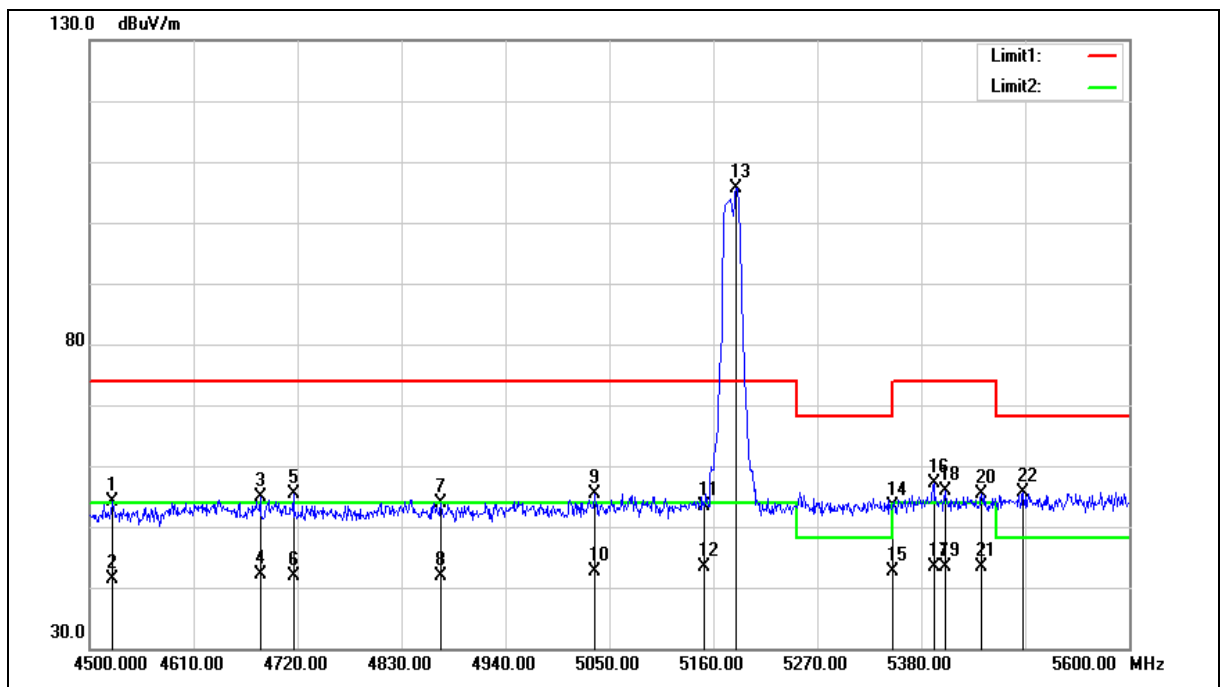

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4524.200	63.46	-9.39	54.07	74.00	-19.93	peak
2	4524.200	50.78	-9.39	41.39	54.00	-12.61	AVG
3	4680.400	63.75	-8.97	54.78	74.00	-19.22	peak
4	4680.400	50.98	-8.97	42.01	54.00	-11.99	AVG
5	4715.600	64.17	-8.89	55.28	74.00	-18.72	peak
6	4715.600	50.75	-8.89	41.86	54.00	-12.14	AVG
7	4871.800	62.47	-8.48	53.99	74.00	-20.01	peak
8	4871.800	50.26	-8.48	41.78	54.00	-12.22	AVG
9	5034.600	63.50	-8.05	55.45	74.00	-18.55	peak
10	5034.600	50.73	-8.05	42.68	54.00	-11.32	AVG
11	5150.000	61.06	-7.69	53.37	74.00	-20.63	peak
12	5150.000	51.11	-7.69	43.42	54.00	-10.58	AVG
13	5184.200	113.19	-7.59	105.60	--	--	peak
14	5350.000	60.56	-7.07	53.49	74.00	-20.51	peak
15	5350.000	49.80	-7.07	42.73	54.00	-11.27	AVG
16	5393.200	64.06	-6.94	57.12	74.00	-16.88	peak
17	5393.200	50.22	-6.94	43.28	54.00	-10.72	AVG
18	5405.300	62.73	-6.90	55.83	74.00	-18.17	peak
19	5405.300	50.25	-6.90	43.35	54.00	-10.65	AVG
20	5443.800	62.24	-6.79	55.45	74.00	-18.55	peak
21	5443.800	50.17	-6.79	43.38	54.00	-10.62	AVG
22	5487.800	62.32	-6.64	55.68	68.20	-12.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

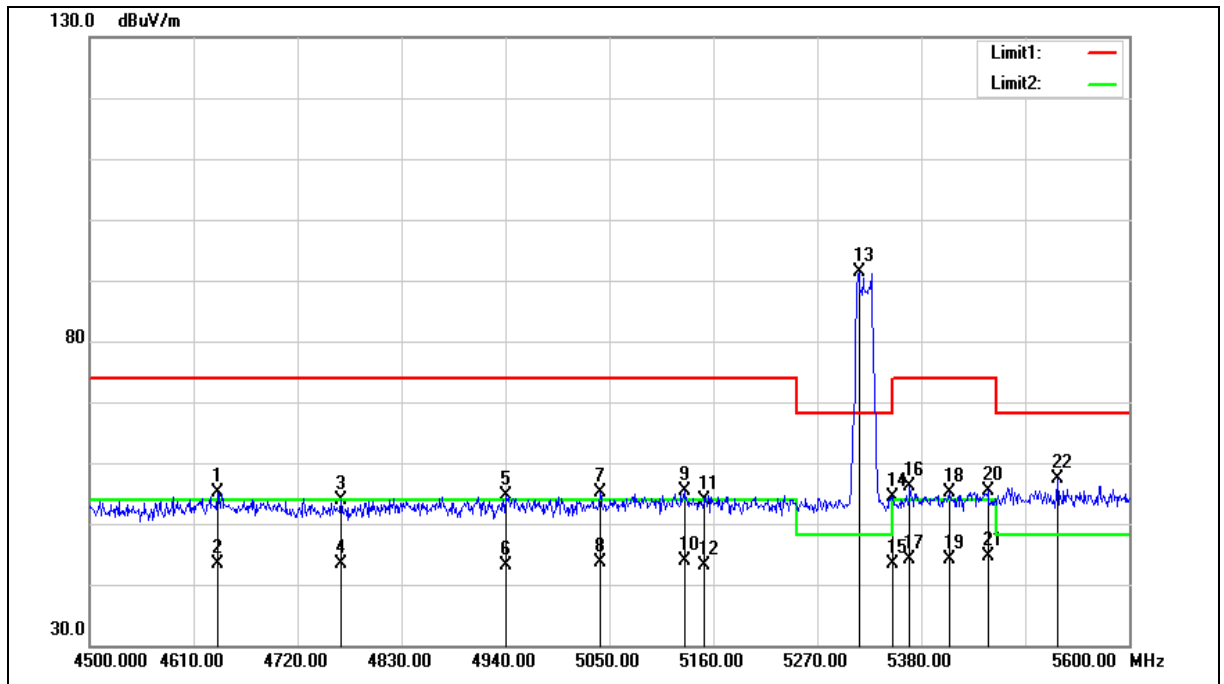

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4635.300	64.16	-9.10	55.06	74.00	-18.94	peak
2	4635.300	52.46	-9.10	43.36	54.00	-10.64	AVG
3	4766.200	62.66	-8.75	53.91	74.00	-20.09	peak
4	4766.200	52.02	-8.75	43.27	54.00	-10.73	AVG
5	4940.000	62.91	-8.30	54.61	74.00	-19.39	peak
6	4940.000	51.34	-8.30	43.04	54.00	-10.96	AVG
7	5040.100	63.26	-8.03	55.23	74.00	-18.77	peak
8	5040.100	51.65	-8.03	43.62	54.00	-10.38	AVG
9	5129.200	63.15	-7.75	55.40	74.00	-18.60	peak
10	5129.200	51.73	-7.75	43.98	54.00	-10.02	AVG
11	5150.000	61.52	-7.69	53.83	74.00	-20.17	peak
12	5150.000	50.86	-7.69	43.17	54.00	-10.83	AVG
13	5314.000	98.49	-7.18	91.31	--	--	peak
14	5350.000	61.41	-7.07	54.34	74.00	-19.66	peak
15	5350.000	50.43	-7.07	43.36	54.00	-10.64	AVG
16	5367.900	63.11	-7.02	56.09	74.00	-17.91	peak
17	5367.900	51.20	-7.02	44.18	54.00	-9.82	AVG
18	5409.700	62.13	-6.89	55.24	74.00	-18.76	peak
19	5409.700	51.14	-6.89	44.25	54.00	-9.75	AVG
20	5450.400	62.08	-6.76	55.32	74.00	-18.68	peak
21	5450.400	51.50	-6.76	44.74	54.00	-9.26	AVG
22	5524.100	63.95	-6.56	57.39	68.20	-10.81	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

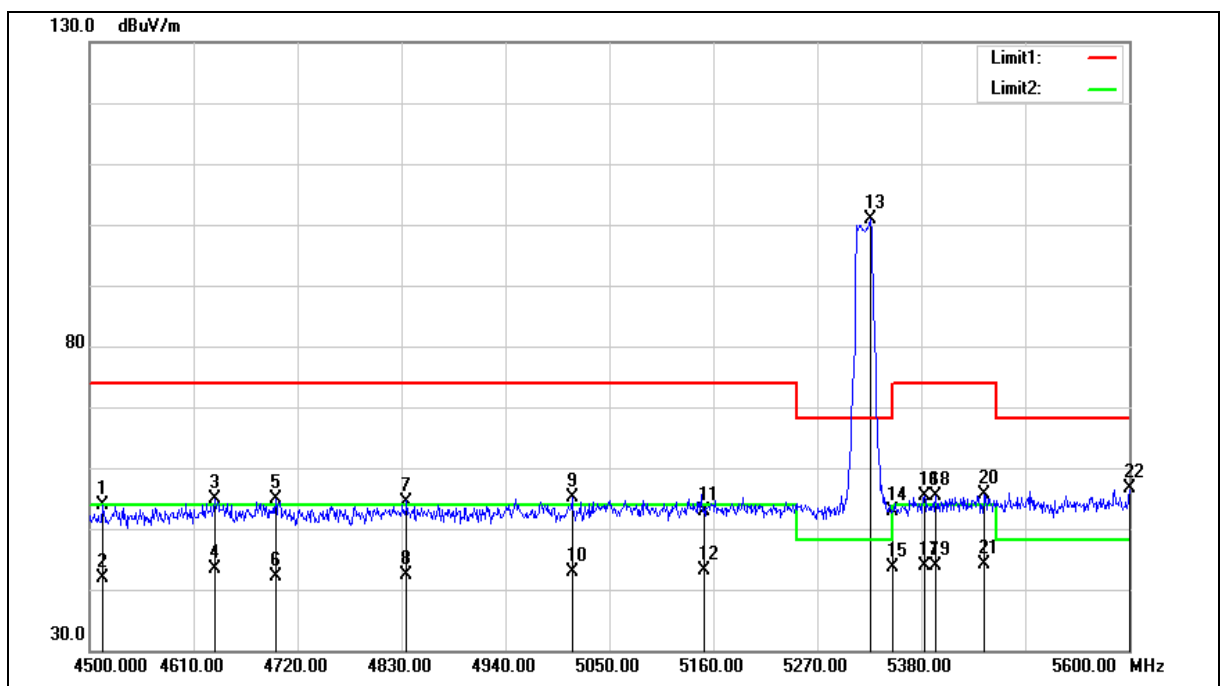

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4513.200	63.38	-9.41	53.97	74.00	-20.03	peak
2	4513.200	51.23	-9.41	41.82	54.00	-12.18	AVG
3	4633.100	63.94	-9.11	54.83	74.00	-19.17	peak
4	4633.100	52.41	-9.11	43.30	54.00	-10.70	AVG
5	4696.900	63.70	-8.94	54.76	74.00	-19.24	peak
6	4696.900	51.11	-8.94	42.17	54.00	-11.83	AVG
7	4835.500	63.08	-8.58	54.50	74.00	-19.50	peak
8	4835.500	51.06	-8.58	42.48	54.00	-11.52	AVG
9	5010.400	63.14	-8.12	55.02	74.00	-18.98	peak
10	5010.400	51.02	-8.12	42.90	54.00	-11.10	AVG
11	5150.000	60.50	-7.69	52.81	74.00	-21.19	peak
12	5150.000	50.93	-7.69	43.24	54.00	-10.76	AVG
13	5326.100	107.99	-7.14	100.85	--	--	peak
14	5350.000	59.99	-7.07	52.92	74.00	-21.08	peak
15	5350.000	50.66	-7.07	43.59	54.00	-10.41	AVG
16	5383.300	62.44	-6.97	55.47	74.00	-18.53	peak
17	5383.300	50.78	-6.97	43.81	54.00	-10.19	AVG
18	5395.400	62.30	-6.93	55.37	74.00	-18.63	peak
19	5395.400	50.77	-6.93	43.84	54.00	-10.16	AVG
20	5447.100	62.41	-6.77	55.64	74.00	-18.36	peak
21	5447.100	50.82	-6.77	44.05	54.00	-9.95	AVG
22	5600.000	63.08	-6.39	56.69	68.20	-11.51	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

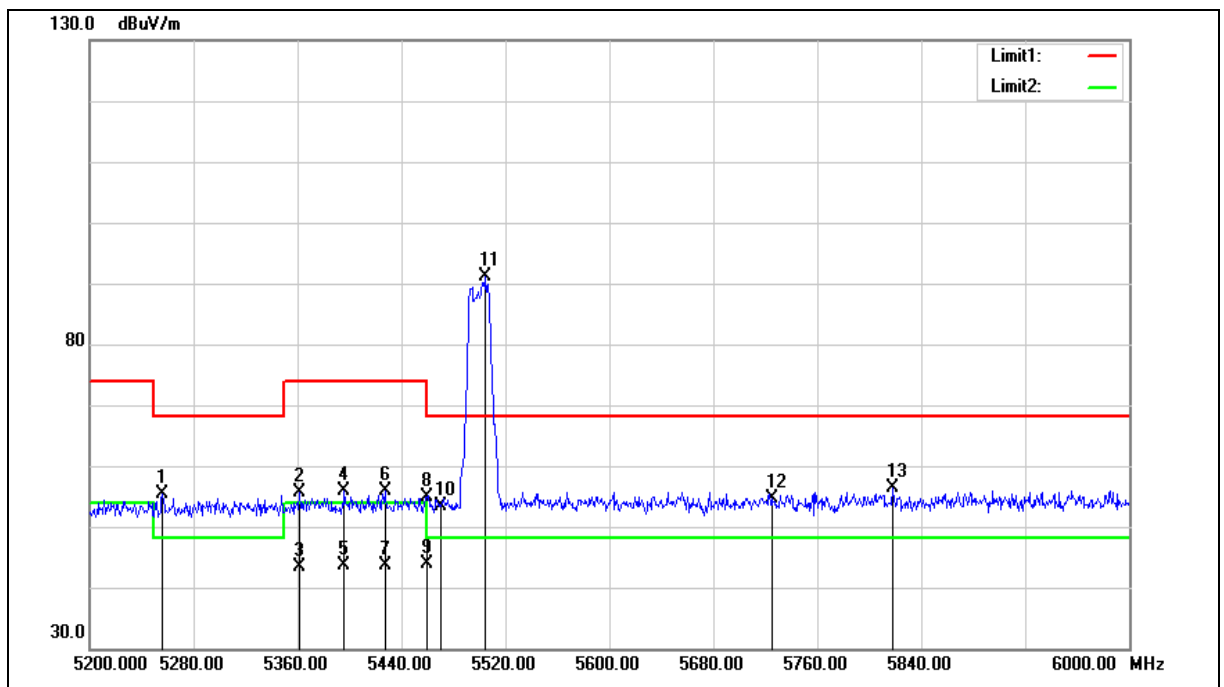

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5256.000	62.68	-7.36	55.32	68.20	-12.88	peak
2	5361.600	62.56	-7.04	55.52	74.00	-18.48	peak
3	5361.600	50.42	-7.04	43.38	54.00	-10.62	AVG
4	5396.000	62.70	-6.93	55.77	74.00	-18.23	peak
5	5396.000	50.63	-6.93	43.70	54.00	-10.30	AVG
6	5427.200	62.73	-6.83	55.90	74.00	-18.10	peak
7	5427.200	50.55	-6.83	43.72	54.00	-10.28	AVG
8	5460.000	61.58	-6.73	54.85	74.00	-19.15	peak
9	5460.000	50.59	-6.73	43.86	54.00	-10.14	AVG
10	5470.000	60.16	-6.70	53.46	68.20	-14.74	peak
11	5504.800	97.76	-6.61	91.15	--	--	peak
12	5725.000	60.70	-6.11	54.59	68.20	-13.61	peak
13	5817.600	62.23	-5.91	56.32	68.20	-11.88	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

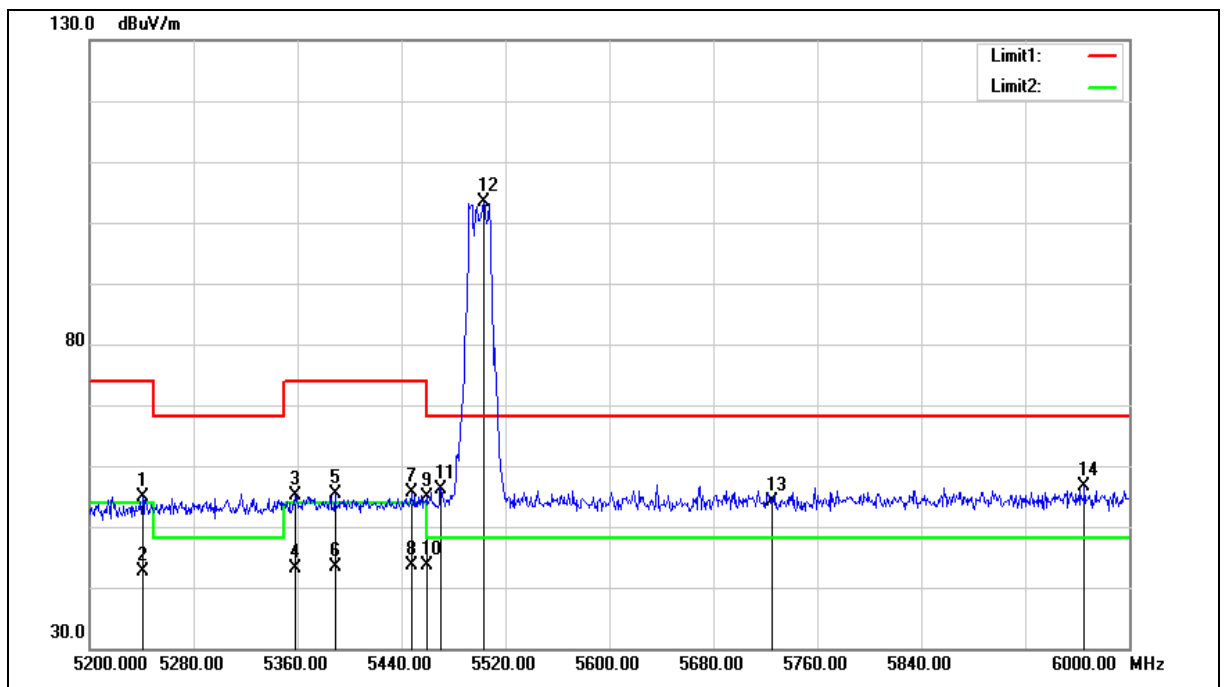

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5240.800	62.18	-7.41	54.77	74.00	-19.23	peak
2	5240.800	50.11	-7.41	42.70	54.00	-11.30	AVG
3	5358.400	62.26	-7.04	55.22	74.00	-18.78	peak
4	5358.400	50.21	-7.04	43.17	54.00	-10.83	AVG
5	5388.800	62.33	-6.95	55.38	74.00	-18.62	peak
6	5388.800	50.24	-6.95	43.29	54.00	-10.71	AVG
7	5448.000	62.45	-6.76	55.69	74.00	-18.31	peak
8	5448.000	50.27	-6.76	43.51	54.00	-10.49	AVG
9	5460.000	61.59	-6.73	54.86	74.00	-19.14	peak
10	5460.000	50.45	-6.73	43.72	54.00	-10.28	AVG
11	5470.000	62.71	-6.70	56.01	68.20	-12.19	peak
12	5503.200	109.99	-6.61	103.38	--	--	peak
13	5725.000	60.14	-6.11	54.03	68.20	-14.17	peak
14	5965.600	62.12	-5.58	56.54	68.20	-11.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

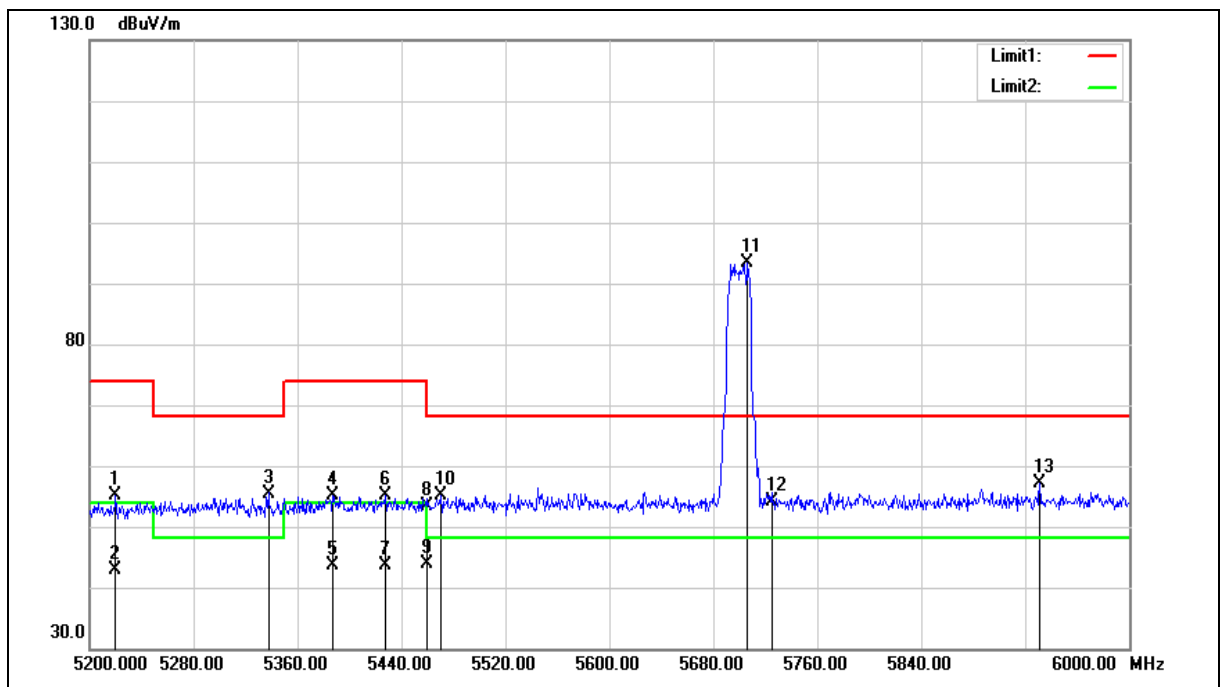

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5220.000	62.66	-7.47	55.19	74.00	-18.81	peak
2	5220.000	50.23	-7.47	42.76	54.00	-11.24	AVG
3	5337.600	62.61	-7.11	55.50	68.20	-12.70	peak
4	5387.200	62.08	-6.95	55.13	74.00	-18.87	peak
5	5387.200	50.60	-6.95	43.65	54.00	-10.35	AVG
6	5427.200	62.00	-6.83	55.17	74.00	-18.83	peak
7	5427.200	50.54	-6.83	43.71	54.00	-10.29	AVG
8	5460.000	60.03	-6.73	53.30	74.00	-20.70	peak
9	5460.000	50.51	-6.73	43.78	54.00	-10.22	AVG
10	5470.000	61.88	-6.70	55.18	68.20	-13.02	peak
11	5706.400	99.61	-6.15	93.46	--	--	peak
12	5725.000	60.24	-6.11	54.13	68.20	-14.07	peak
13	5931.200	62.90	-5.67	57.23	68.20	-10.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

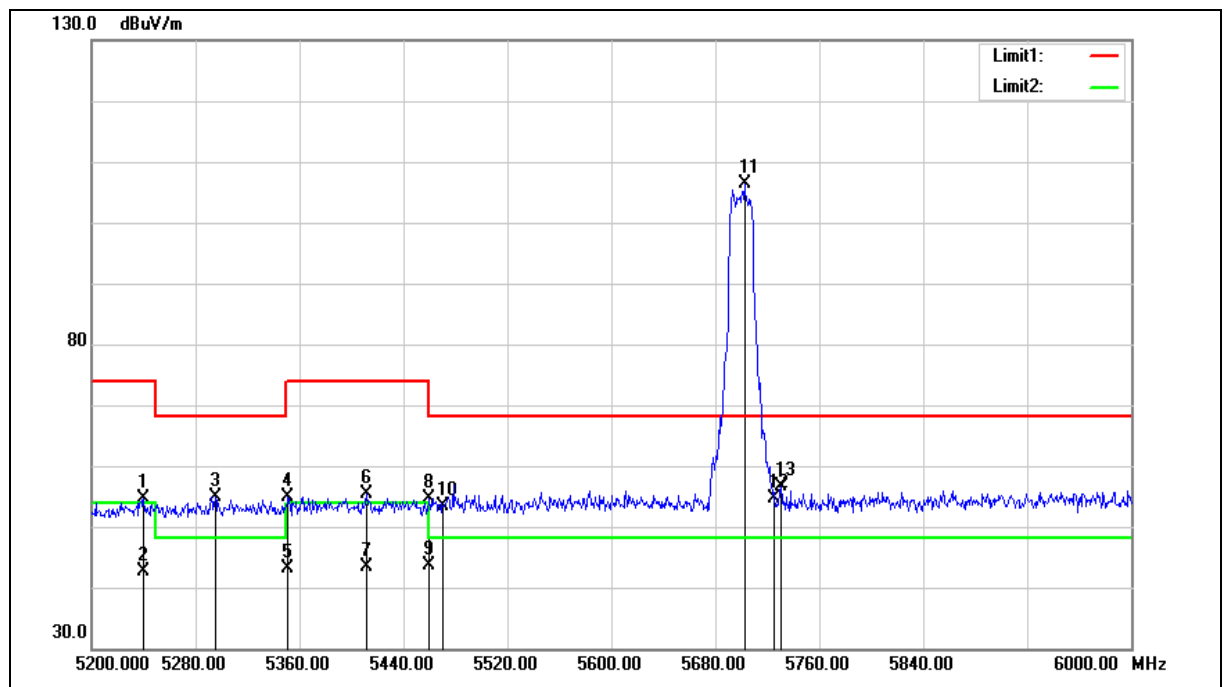

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5240.000	62.16	-7.41	54.75	74.00	-19.25	peak
2	5240.000	50.15	-7.41	42.74	54.00	-11.26	AVG
3	5295.200	62.04	-7.24	54.80	68.20	-13.40	peak
4	5351.200	61.91	-7.07	54.84	74.00	-19.16	peak
5	5351.200	50.16	-7.07	43.09	54.00	-10.91	AVG
6	5412.000	62.38	-6.88	55.50	74.00	-18.50	peak
7	5412.000	50.38	-6.88	43.50	54.00	-10.50	AVG
8	5460.000	61.28	-6.73	54.55	74.00	-19.45	peak
9	5460.000	50.48	-6.73	43.75	54.00	-10.25	AVG
10	5470.000	60.02	-6.70	53.32	68.20	-14.88	peak
11	5702.400	112.48	-6.17	106.31	--	--	peak
12	5725.000	60.62	-6.11	54.51	68.20	-13.69	peak
13	5730.400	62.73	-6.10	56.63	68.20	-11.57	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

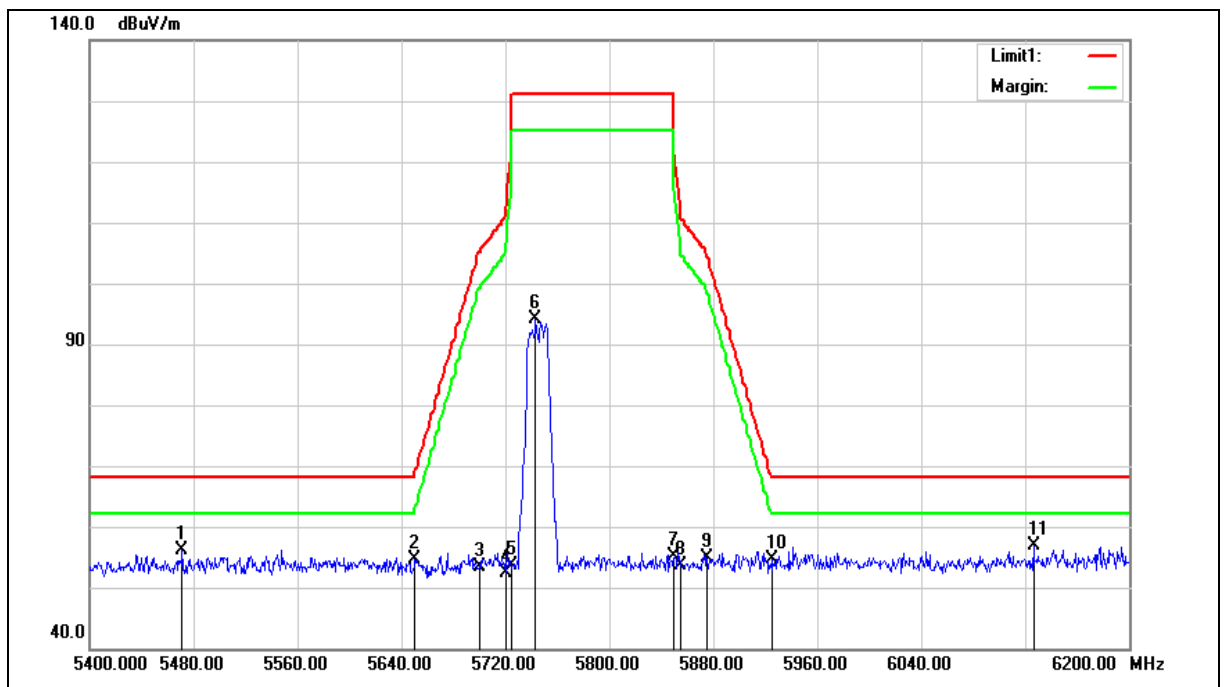

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5471.200	62.77	-6.70	56.07	68.20	-12.13	peak
2	5650.000	60.88	-6.28	54.60	68.20	-13.60	peak
3	5700.000	59.51	-6.17	53.34	105.20	-51.86	peak
4	5720.000	58.50	-6.12	52.38	110.80	-58.42	peak
5	5725.000	59.85	-6.11	53.74	122.20	-68.46	peak
6	5743.200	100.20	-6.08	94.12	--	--	peak
7	5850.000	61.06	-5.84	55.22	122.20	-66.98	peak
8	5855.000	59.46	-5.83	53.63	110.80	-57.17	peak
9	5875.000	60.56	-5.78	54.78	105.20	-50.42	peak
10	5925.000	60.41	-5.68	54.73	68.20	-13.47	peak
11	6126.400	61.95	-5.08	56.87	68.20	-11.33	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

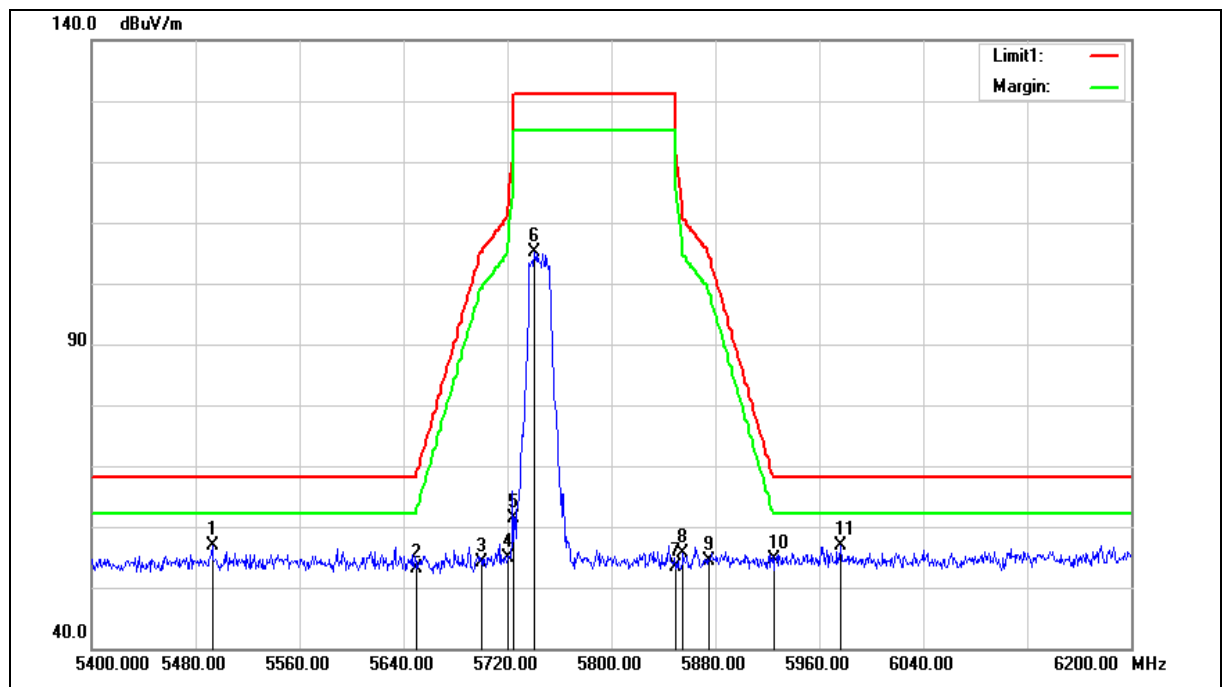

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5492.800	63.41	-6.63	56.78	68.20	-11.42	peak
2	5650.000	59.40	-6.28	53.12	68.20	-15.08	peak
3	5700.000	60.34	-6.17	54.17	105.20	-51.03	peak
4	5720.000	60.96	-6.12	54.84	110.80	-55.96	peak
5	5725.000	67.56	-6.11	61.45	122.20	-60.75	peak
6	5740.800	111.19	-6.08	105.11	--	--	peak
7	5850.000	59.22	-5.84	53.38	122.20	-68.82	peak
8	5855.000	61.40	-5.83	55.57	110.80	-55.23	peak
9	5875.000	60.06	-5.78	54.28	105.20	-50.92	peak
10	5925.000	60.23	-5.68	54.55	68.20	-13.65	peak
11	5976.000	62.55	-5.56	56.99	68.20	-11.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		

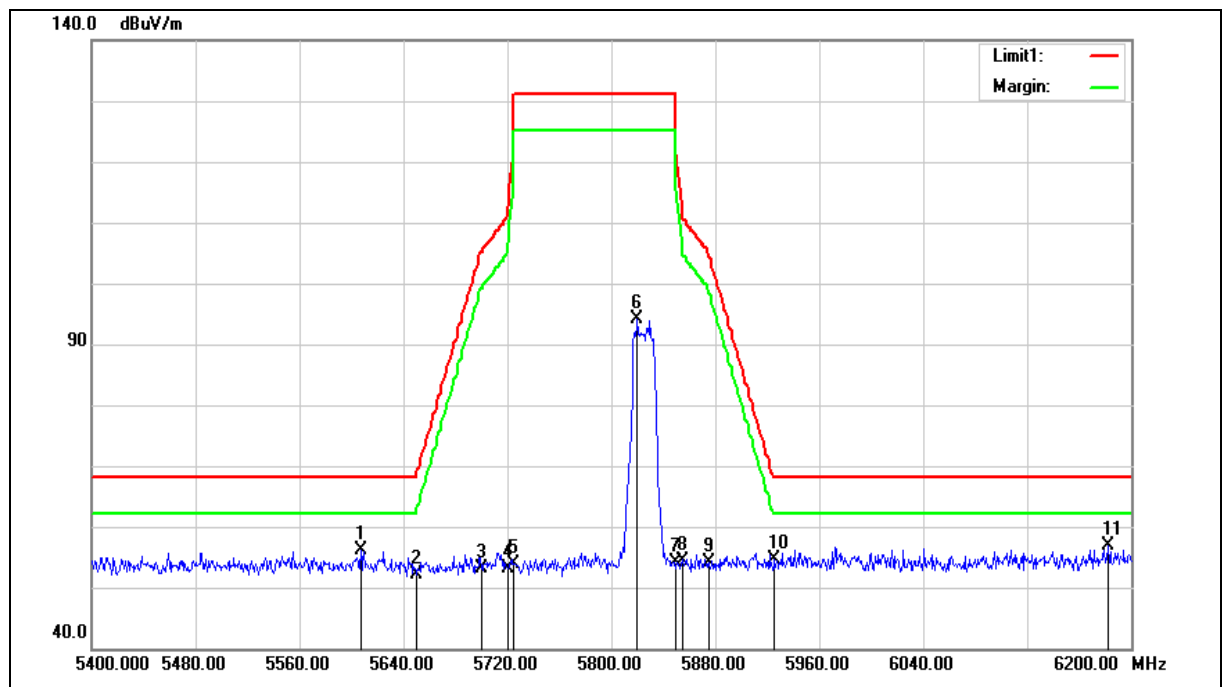

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5607.200	62.54	-6.37	56.17	68.20	-12.03	peak
2	5650.000	58.38	-6.28	52.10	68.20	-16.10	peak
3	5700.000	59.27	-6.17	53.10	105.20	-52.10	peak
4	5720.000	59.23	-6.12	53.11	110.80	-57.69	peak
5	5725.000	60.10	-6.11	53.99	122.20	-68.21	peak
6	5820.000	100.08	-5.91	94.17	--	--	peak
7	5850.000	60.04	-5.84	54.20	122.20	-68.00	peak
8	5855.000	60.15	-5.83	54.32	110.80	-56.48	peak
9	5875.000	59.79	-5.78	54.01	105.20	-51.19	peak
10	5925.000	60.33	-5.68	54.65	68.20	-13.55	peak
11	6182.400	61.88	-4.89	56.99	68.20	-11.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		

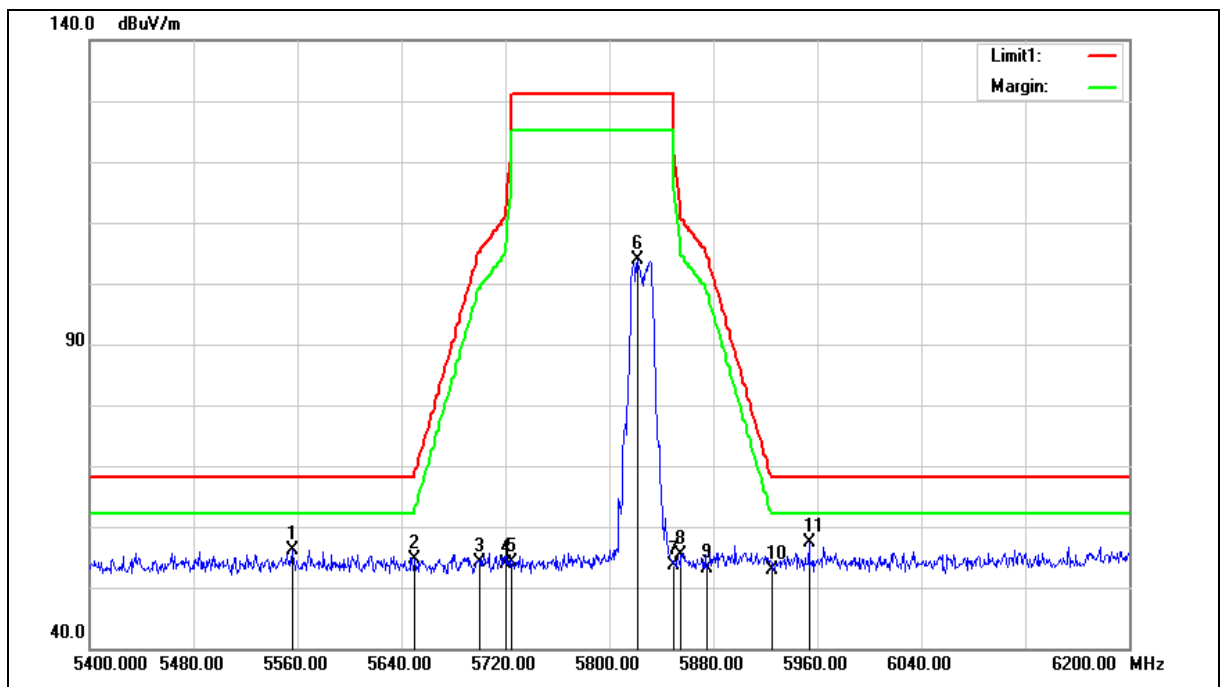

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 6		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5556.000	62.62	-6.49	56.13	68.20	-12.07	peak
2	5650.000	61.01	-6.28	54.73	68.20	-13.47	peak
3	5700.000	60.22	-6.17	54.05	105.20	-51.15	peak
4	5720.000	60.04	-6.12	53.92	110.80	-56.88	peak
5	5725.000	60.23	-6.11	54.12	122.20	-68.08	peak
6	5821.600	109.87	-5.90	103.97	--	--	peak
7	5850.000	59.56	-5.84	53.72	122.20	-68.48	peak
8	5855.000	61.17	-5.83	55.34	110.80	-55.46	peak
9	5875.000	59.00	-5.78	53.22	105.20	-51.98	peak
10	5925.000	58.53	-5.68	52.85	68.20	-15.35	peak
11	5953.600	62.97	-5.62	57.35	68.20	-10.85	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

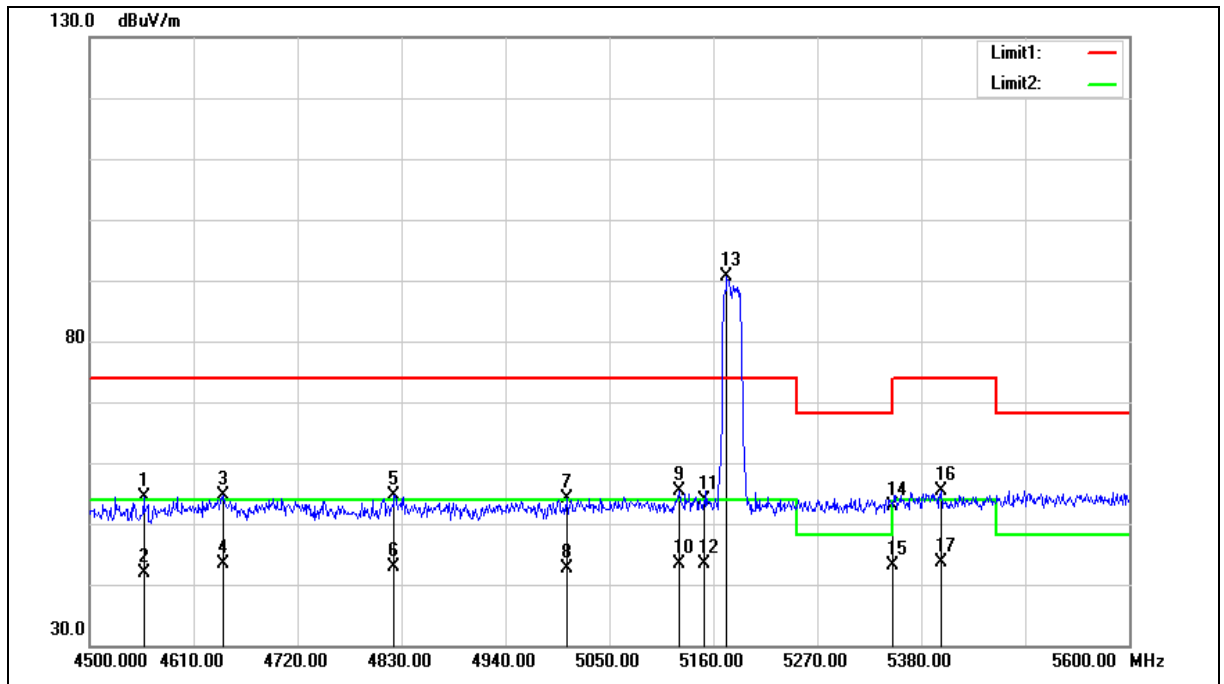

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4557.200	63.70	-9.30	54.40	74.00	-19.60	peak
2	4557.200	51.22	-9.30	41.92	54.00	-12.08	AVG
3	4641.900	63.61	-9.08	54.53	74.00	-19.47	peak
4	4641.900	52.47	-9.08	43.39	54.00	-10.61	AVG
5	4822.300	63.34	-8.61	54.73	74.00	-19.27	peak
6	4822.300	51.53	-8.61	42.92	54.00	-11.08	AVG
7	5004.900	62.25	-8.14	54.11	74.00	-19.89	peak
8	5004.900	50.72	-8.14	42.58	54.00	-11.42	AVG
9	5123.700	63.12	-7.78	55.34	74.00	-18.66	peak
10	5123.700	51.04	-7.78	43.26	54.00	-10.74	AVG
11	5150.000	61.53	-7.69	53.84	74.00	-20.16	peak
12	5150.000	51.07	-7.69	43.38	54.00	-10.62	AVG
13	5174.300	98.27	-7.62	90.65	--	--	peak
14	5350.000	59.95	-7.07	52.88	74.00	-21.12	peak
15	5350.000	50.21	-7.07	43.14	54.00	-10.86	AVG
16	5400.900	62.26	-6.92	55.34	74.00	-18.66	peak
17	5400.900	50.59	-6.92	43.67	54.00	-10.33	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

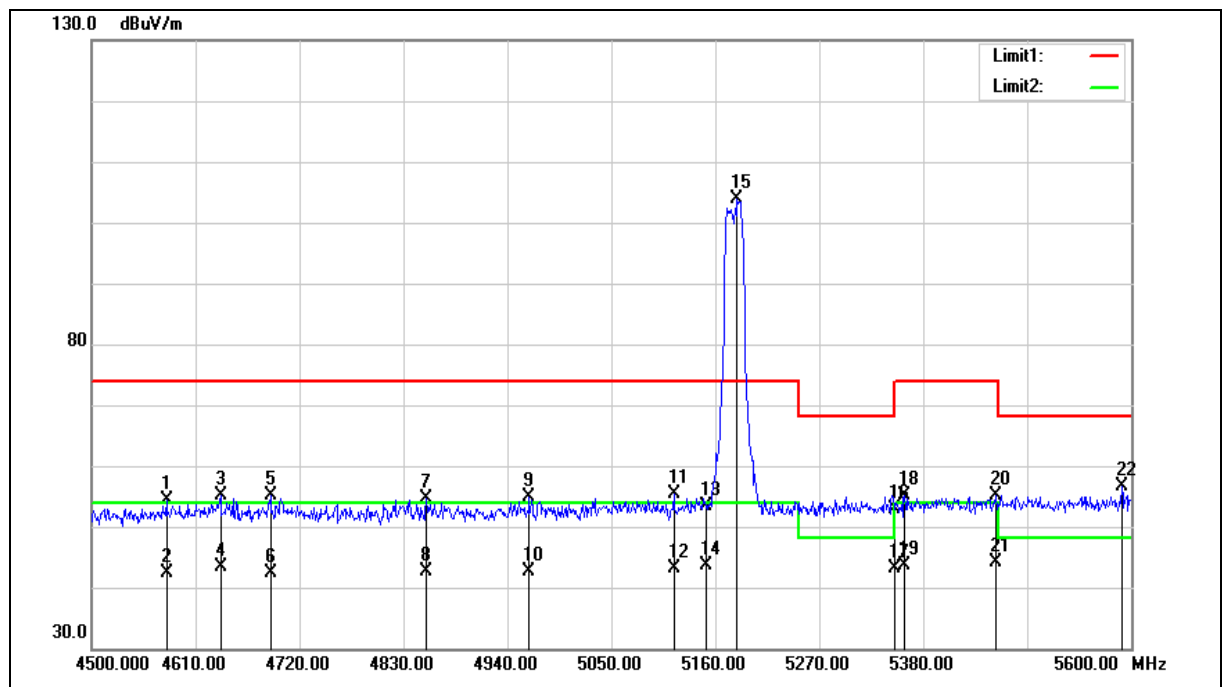

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4579.200	63.71	-9.24	54.47	74.00	-19.53	peak
2	4579.200	51.60	-9.24	42.36	54.00	-11.64	AVG
3	4636.400	64.12	-9.09	55.03	74.00	-18.97	peak
4	4636.400	52.54	-9.09	43.45	54.00	-10.55	AVG
5	4689.200	64.12	-8.96	55.16	74.00	-18.84	peak
6	4689.200	51.45	-8.96	42.49	54.00	-11.51	AVG
7	4854.200	63.28	-8.53	54.75	74.00	-19.25	peak
8	4854.200	51.15	-8.53	42.62	54.00	-11.38	AVG
9	4963.100	63.07	-8.25	54.82	74.00	-19.18	peak
10	4963.100	50.82	-8.25	42.57	54.00	-11.43	AVG
11	5116.000	63.16	-7.79	55.37	74.00	-18.63	peak
12	5116.000	50.91	-7.79	43.12	54.00	-10.88	AVG
13	5150.000	61.14	-7.69	53.45	74.00	-20.55	peak
14	5150.000	51.42	-7.69	43.73	54.00	-10.27	AVG
15	5183.100	111.46	-7.59	103.87	--	--	peak
16	5350.000	59.83	-7.07	52.76	74.00	-21.24	peak
17	5350.000	50.30	-7.07	43.23	54.00	-10.77	AVG
18	5360.200	62.11	-7.04	55.07	74.00	-18.93	peak
19	5360.200	50.62	-7.04	43.58	54.00	-10.42	AVG
20	5457.000	61.96	-6.74	55.22	74.00	-18.78	peak
21	5457.000	50.95	-6.74	44.21	54.00	-9.79	AVG
22	5590.100	63.15	-6.41	56.74	68.20	-11.46	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

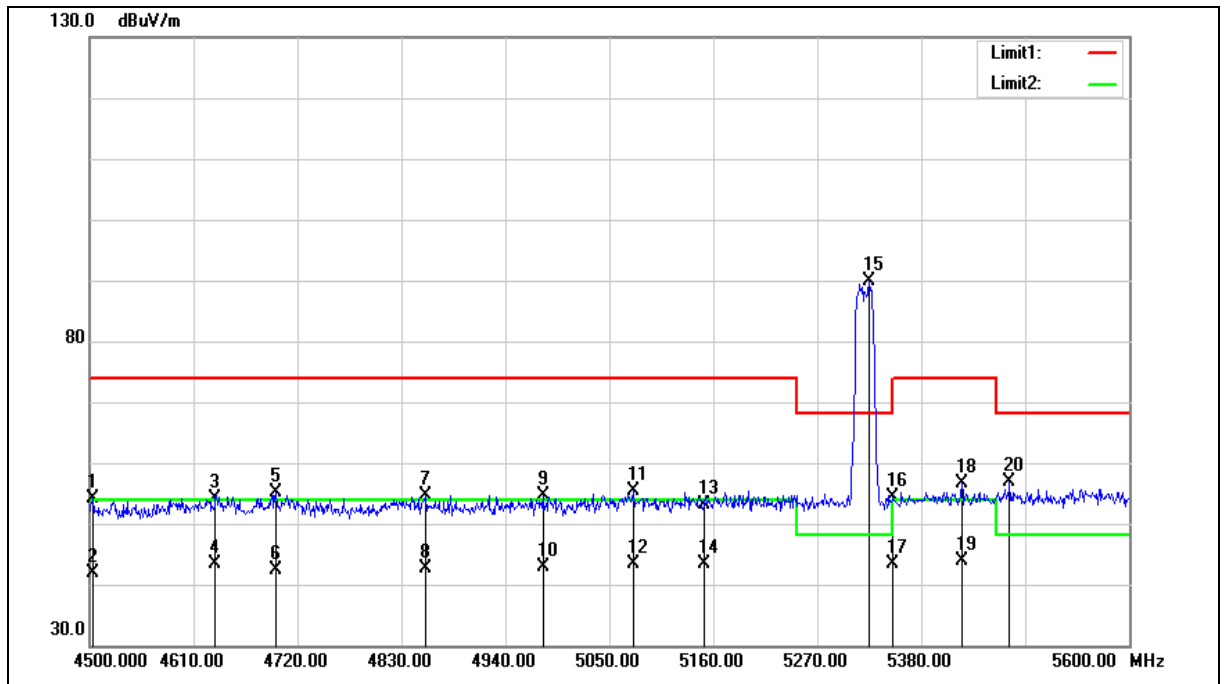

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4503.300	63.46	-9.44	54.02	74.00	-19.98	peak
2	4503.300	51.36	-9.44	41.92	54.00	-12.08	AVG
3	4633.100	63.25	-9.11	54.14	74.00	-19.86	peak
4	4633.100	52.46	-9.11	43.35	54.00	-10.65	AVG
5	4696.900	64.11	-8.94	55.17	74.00	-18.83	peak
6	4696.900	51.39	-8.94	42.45	54.00	-11.55	AVG
7	4855.300	63.17	-8.53	54.64	74.00	-19.36	peak
8	4855.300	51.21	-8.53	42.68	54.00	-11.32	AVG
9	4979.600	62.90	-8.19	54.71	74.00	-19.29	peak
10	4979.600	50.99	-8.19	42.80	54.00	-11.20	AVG
11	5075.300	63.21	-7.91	55.30	74.00	-18.70	peak
12	5075.300	51.41	-7.91	43.50	54.00	-10.50	AVG
13	5150.000	60.86	-7.69	53.17	74.00	-20.83	peak
14	5150.000	51.11	-7.69	43.42	54.00	-10.58	AVG
15	5325.000	97.09	-7.14	89.95	--	--	peak
16	5350.000	61.41	-7.07	54.34	74.00	-19.66	peak
17	5350.000	50.52	-7.07	43.45	54.00	-10.55	AVG
18	5422.900	63.43	-6.85	56.58	74.00	-17.42	peak
19	5422.900	50.70	-6.85	43.85	54.00	-10.15	AVG
20	5473.500	63.63	-6.70	56.93	68.20	-11.27	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

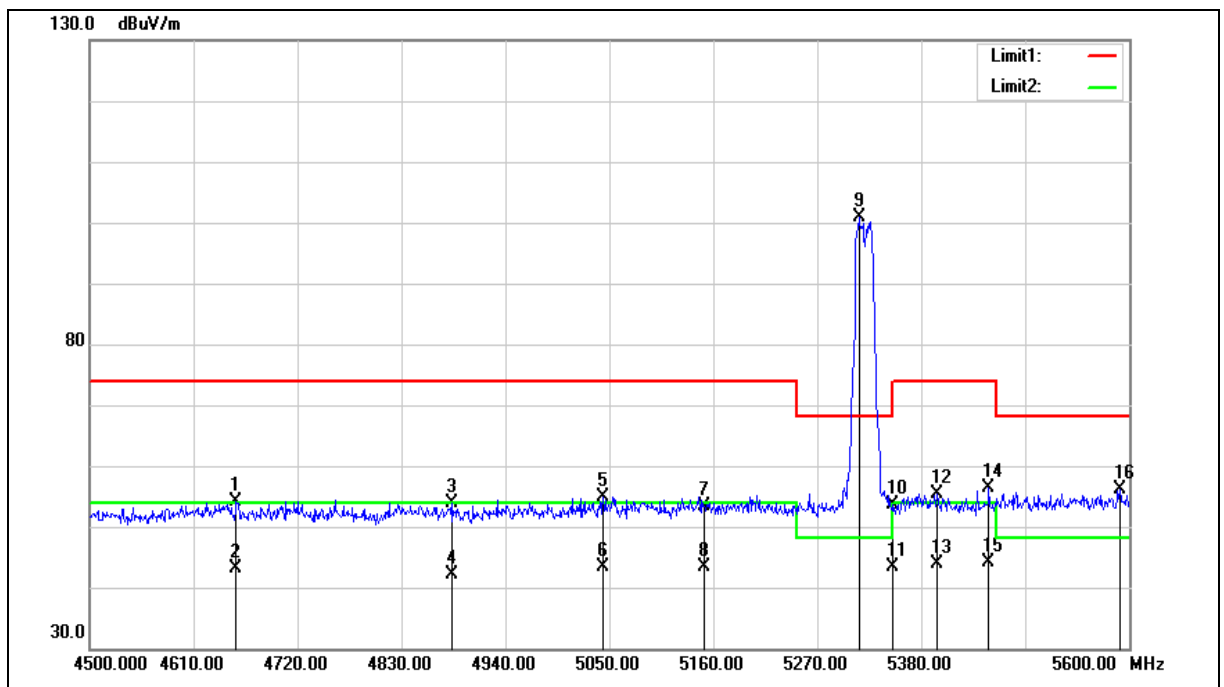

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4655.100	63.14	-9.05	54.09	74.00	-19.91	peak
2	4655.100	52.21	-9.05	43.16	54.00	-10.84	AVG
3	4883.900	62.38	-8.46	53.92	74.00	-20.08	peak
4	4883.900	50.54	-8.46	42.08	54.00	-11.92	AVG
5	5043.400	62.93	-8.02	54.91	74.00	-19.09	peak
6	5043.400	51.32	-8.02	43.30	54.00	-10.70	AVG
7	5150.000	61.06	-7.69	53.37	74.00	-20.63	peak
8	5150.000	51.00	-7.69	43.31	54.00	-10.69	AVG
9	5314.000	108.15	-7.18	100.97	--	--	peak
10	5350.000	60.80	-7.07	53.73	74.00	-20.27	peak
11	5350.000	50.49	-7.07	43.42	54.00	-10.58	AVG
12	5396.500	62.24	-6.93	55.31	74.00	-18.69	peak
13	5396.500	50.87	-6.93	43.94	54.00	-10.06	AVG
14	5451.500	63.02	-6.76	56.26	74.00	-17.74	peak
15	5451.500	50.94	-6.76	44.18	54.00	-9.82	AVG
16	5590.100	62.47	-6.41	56.06	68.20	-12.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

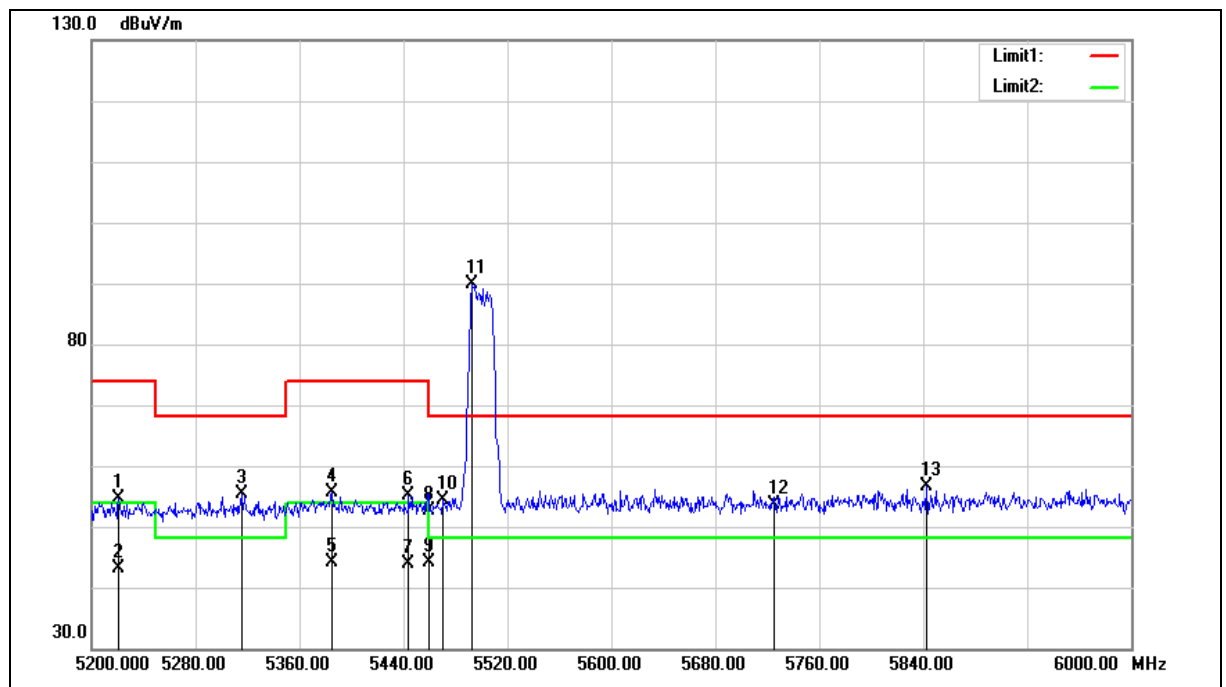

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5220.800	62.01	-7.47	54.54	74.00	-19.46	peak
2	5220.800	50.59	-7.47	43.12	54.00	-10.88	AVG
3	5316.000	62.61	-7.17	55.44	68.20	-12.76	peak
4	5384.800	62.58	-6.97	55.61	74.00	-18.39	peak
5	5384.800	50.99	-6.97	44.02	54.00	-9.98	AVG
6	5444.000	61.88	-6.79	55.09	74.00	-18.91	peak
7	5444.000	50.77	-6.79	43.98	54.00	-10.02	AVG
8	5460.000	59.34	-6.73	52.61	74.00	-21.39	peak
9	5460.000	50.90	-6.73	44.17	54.00	-9.83	AVG
10	5470.000	61.09	-6.70	54.39	68.20	-13.81	peak
11	5492.800	96.52	-6.63	89.89	--	--	peak
12	5725.000	59.64	-6.11	53.53	68.20	-14.67	peak
13	5842.400	62.51	-5.85	56.66	68.20	-11.54	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

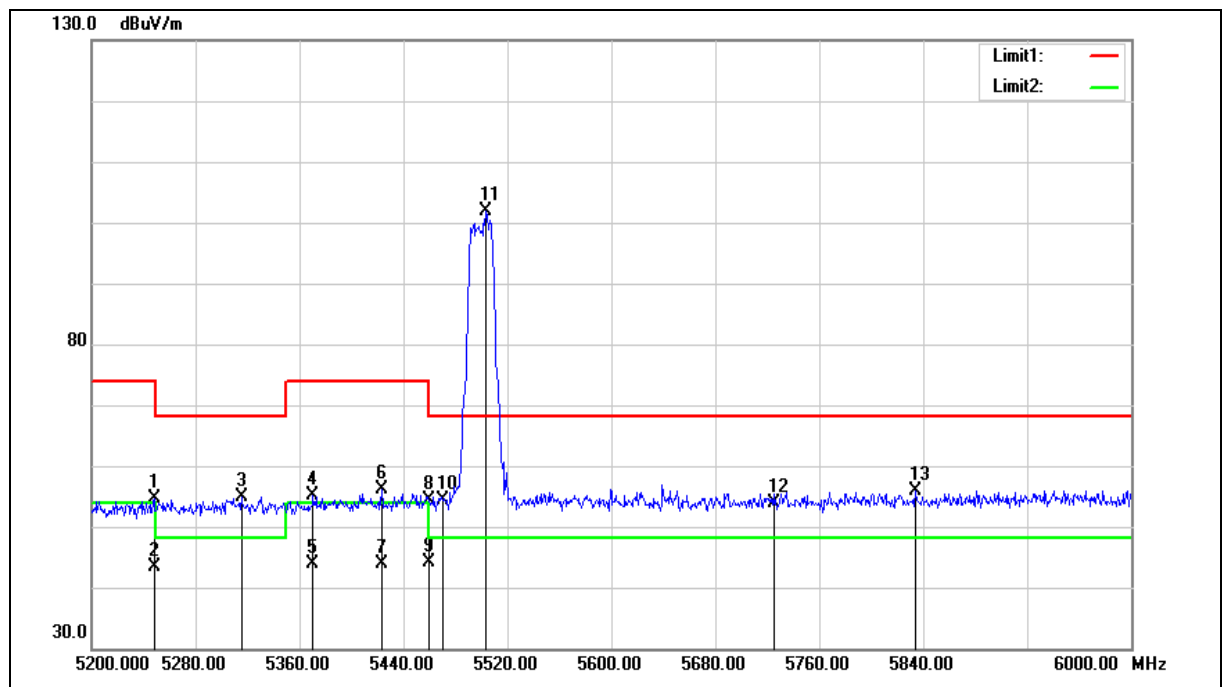

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5248.000	62.01	-7.38	54.63	74.00	-19.37	peak
2	5248.000	50.66	-7.38	43.28	54.00	-10.72	AVG
3	5315.200	62.12	-7.17	54.95	68.20	-13.25	peak
4	5370.400	62.02	-7.01	55.01	74.00	-18.99	peak
5	5370.400	50.81	-7.01	43.80	54.00	-10.20	AVG
6	5423.200	62.88	-6.85	56.03	74.00	-17.97	peak
7	5423.200	50.63	-6.85	43.78	54.00	-10.22	AVG
8	5460.000	61.10	-6.73	54.37	74.00	-19.63	peak
9	5460.000	50.83	-6.73	44.10	54.00	-9.90	AVG
10	5470.000	61.04	-6.70	54.34	68.20	-13.86	peak
11	5503.200	108.53	-6.61	101.92	--	--	peak
12	5725.000	60.02	-6.11	53.91	68.20	-14.29	peak
13	5834.400	61.88	-5.88	56.00	68.20	-12.20	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

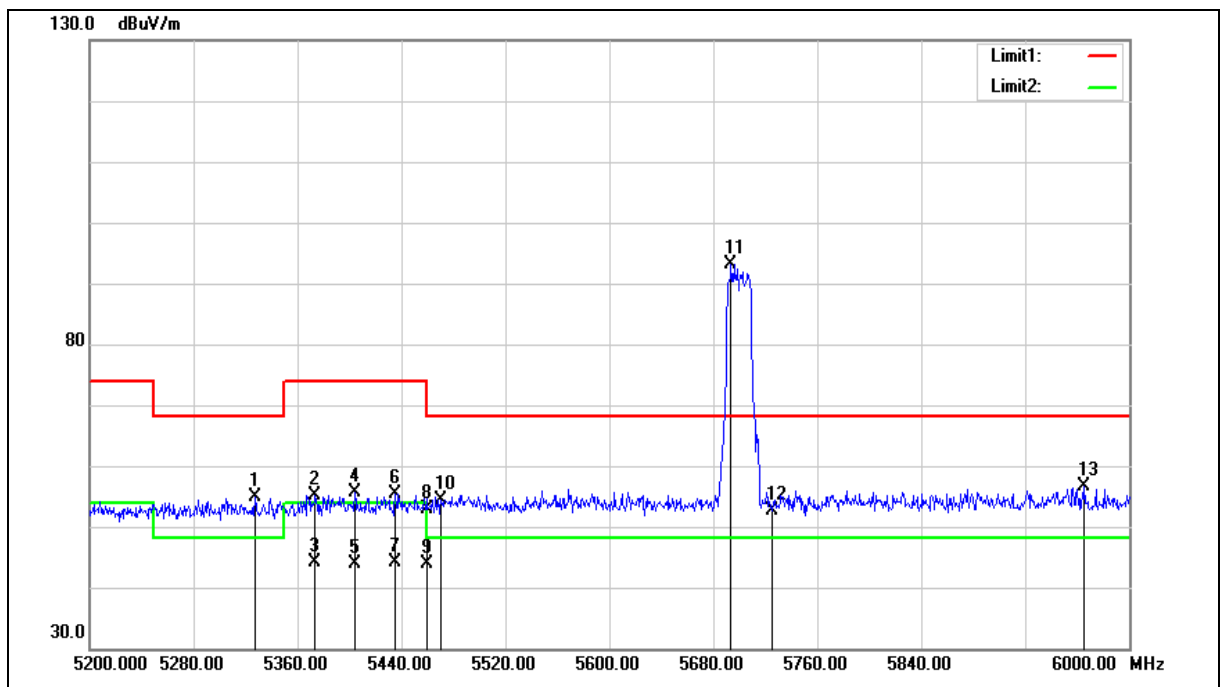

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5327.200	62.05	-7.14	54.91	68.20	-13.29	peak
2	5373.600	62.23	-7.01	55.22	74.00	-18.78	peak
3	5373.600	51.03	-7.01	44.02	54.00	-9.98	AVG
4	5404.000	62.44	-6.91	55.53	74.00	-18.47	peak
5	5404.000	50.85	-6.91	43.94	54.00	-10.06	AVG
6	5435.200	62.29	-6.81	55.48	74.00	-18.52	peak
7	5435.200	50.89	-6.81	44.08	54.00	-9.92	AVG
8	5460.000	59.69	-6.73	52.96	74.00	-21.04	peak
9	5460.000	50.64	-6.73	43.91	54.00	-10.09	AVG
10	5470.000	61.13	-6.70	54.43	68.20	-13.77	peak
11	5693.600	99.43	-6.19	93.24	--	--	peak
12	5725.000	58.69	-6.11	52.58	68.20	-15.62	peak
13	5965.600	62.32	-5.58	56.74	68.20	-11.46	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

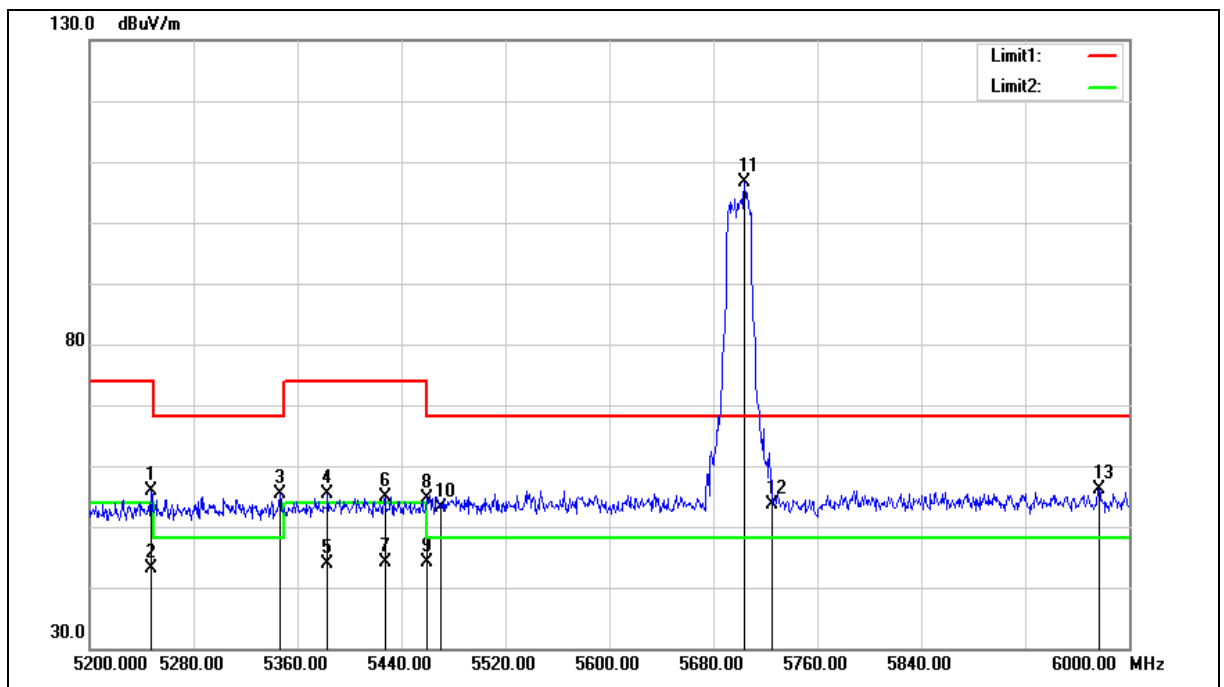

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5247.200	63.18	-7.39	55.79	74.00	-18.21	peak
2	5247.200	50.49	-7.39	43.10	54.00	-10.90	AVG
3	5346.400	62.53	-7.08	55.45	68.20	-12.75	peak
4	5383.200	62.35	-6.97	55.38	74.00	-18.62	peak
5	5383.200	50.95	-6.97	43.98	54.00	-10.02	AVG
6	5427.200	61.82	-6.83	54.99	74.00	-19.01	peak
7	5427.200	50.88	-6.83	44.05	54.00	-9.95	AVG
8	5460.000	61.39	-6.73	54.66	74.00	-19.34	peak
9	5460.000	50.83	-6.73	44.10	54.00	-9.90	AVG
10	5470.000	59.93	-6.70	53.23	68.20	-14.97	peak
11	5704.000	112.80	-6.17	106.63	--	--	peak
12	5725.000	59.62	-6.11	53.51	68.20	-14.69	peak
13	5976.800	61.67	-5.56	56.11	68.20	-12.09	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

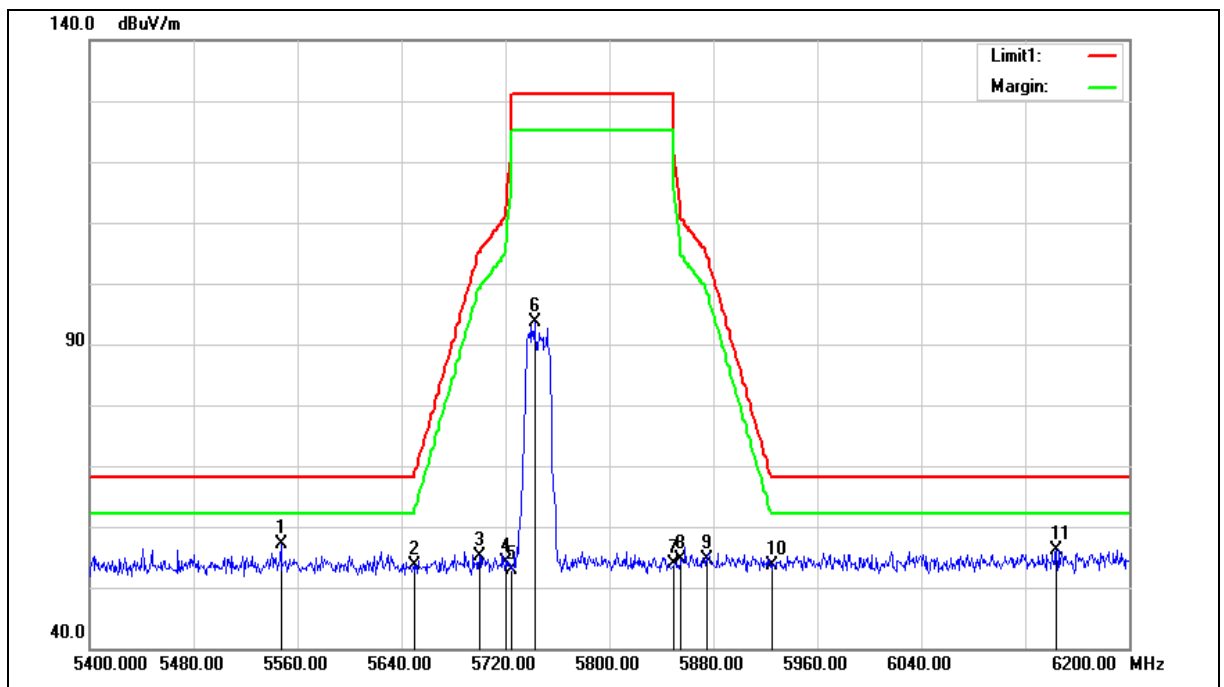

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5547.200	63.59	-6.50	57.09	68.20	-11.11	peak
2	5650.000	59.99	-6.28	53.71	68.20	-14.49	peak
3	5700.000	61.34	-6.17	55.17	105.20	-50.03	peak
4	5720.000	60.26	-6.12	54.14	110.80	-56.66	peak
5	5725.000	58.90	-6.11	52.79	122.20	-69.41	peak
6	5742.400	99.77	-6.08	93.69	--	--	peak
7	5850.000	59.62	-5.84	53.78	122.20	-68.42	peak
8	5855.000	60.49	-5.83	54.66	110.80	-56.14	peak
9	5875.000	60.39	-5.78	54.61	105.20	-50.59	peak
10	5925.000	59.27	-5.68	53.59	68.20	-14.61	peak
11	6144.000	61.27	-5.02	56.25	68.20	-11.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

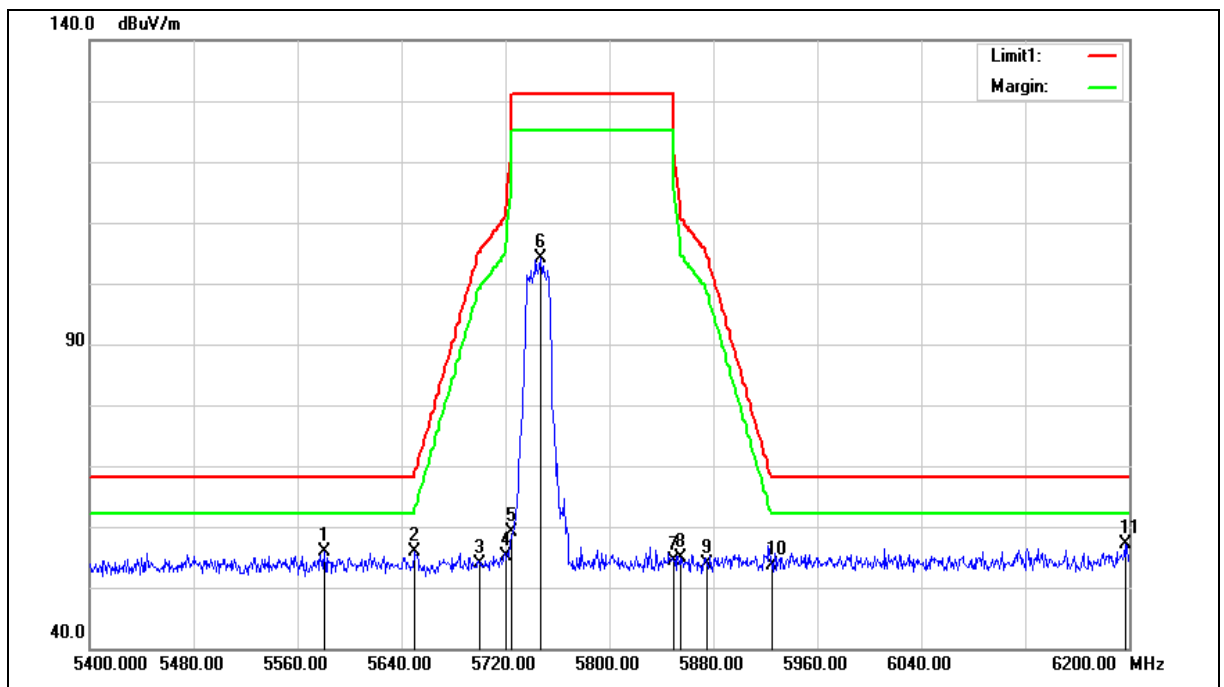

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5580.800	62.35	-6.43	55.92	68.20	-12.28	peak
2	5650.000	62.19	-6.28	55.91	68.20	-12.29	peak
3	5700.000	60.15	-6.17	53.98	105.20	-51.22	peak
4	5720.000	61.26	-6.12	55.14	110.80	-55.66	peak
5	5725.000	65.31	-6.11	59.20	122.20	-63.00	peak
6	5747.200	110.09	-6.07	104.02	--	--	peak
7	5850.000	60.10	-5.84	54.26	122.20	-67.94	peak
8	5855.000	60.66	-5.83	54.83	110.80	-55.97	peak
9	5875.000	59.73	-5.78	53.95	105.20	-51.25	peak
10	5925.000	59.33	-5.68	53.65	68.20	-14.55	peak
11	6196.800	61.84	-4.83	57.01	68.20	-11.19	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

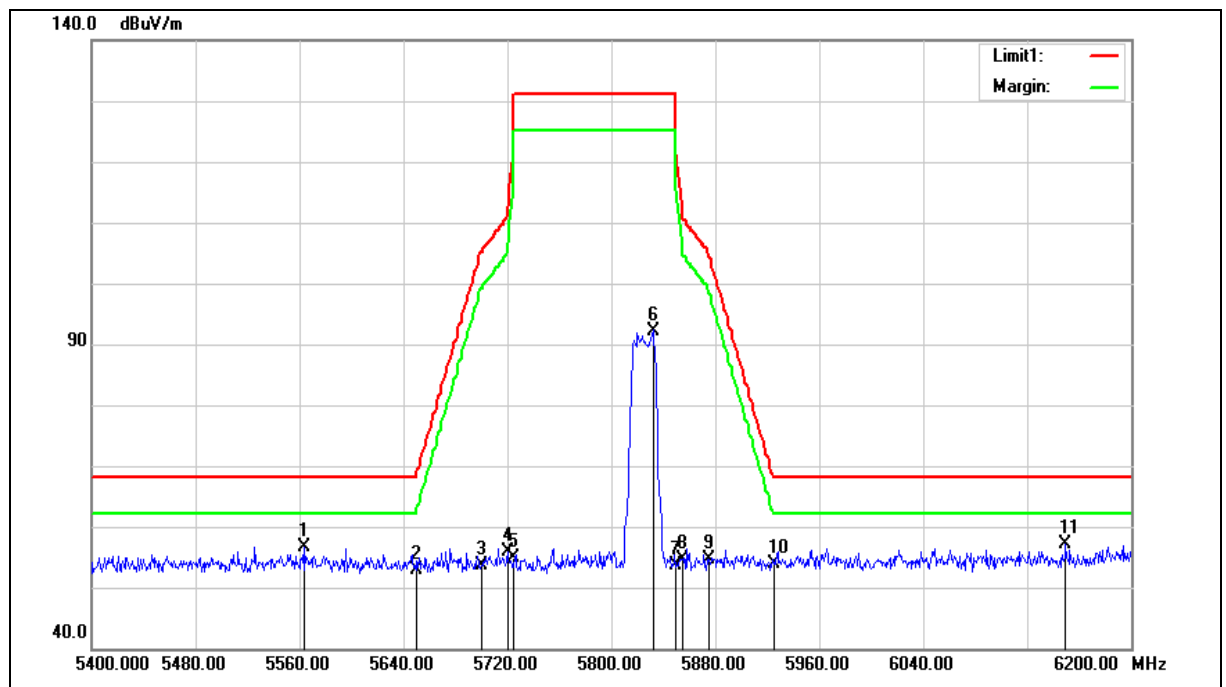

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5563.200	63.20	-6.48	56.72	68.20	-11.48	peak
2	5650.000	59.16	-6.28	52.88	68.20	-15.32	peak
3	5700.000	59.75	-6.17	53.58	105.20	-51.62	peak
4	5720.000	61.96	-6.12	55.84	110.80	-54.96	peak
5	5725.000	60.88	-6.11	54.77	122.20	-67.43	peak
6	5832.000	98.13	-5.88	92.25	--	--	peak
7	5850.000	59.52	-5.84	53.68	122.20	-68.52	peak
8	5855.000	60.34	-5.83	54.51	110.80	-56.29	peak
9	5875.000	60.44	-5.78	54.66	105.20	-50.54	peak
10	5925.000	59.48	-5.68	53.80	68.20	-14.40	peak
11	6149.600	62.18	-5.00	57.18	68.20	-11.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

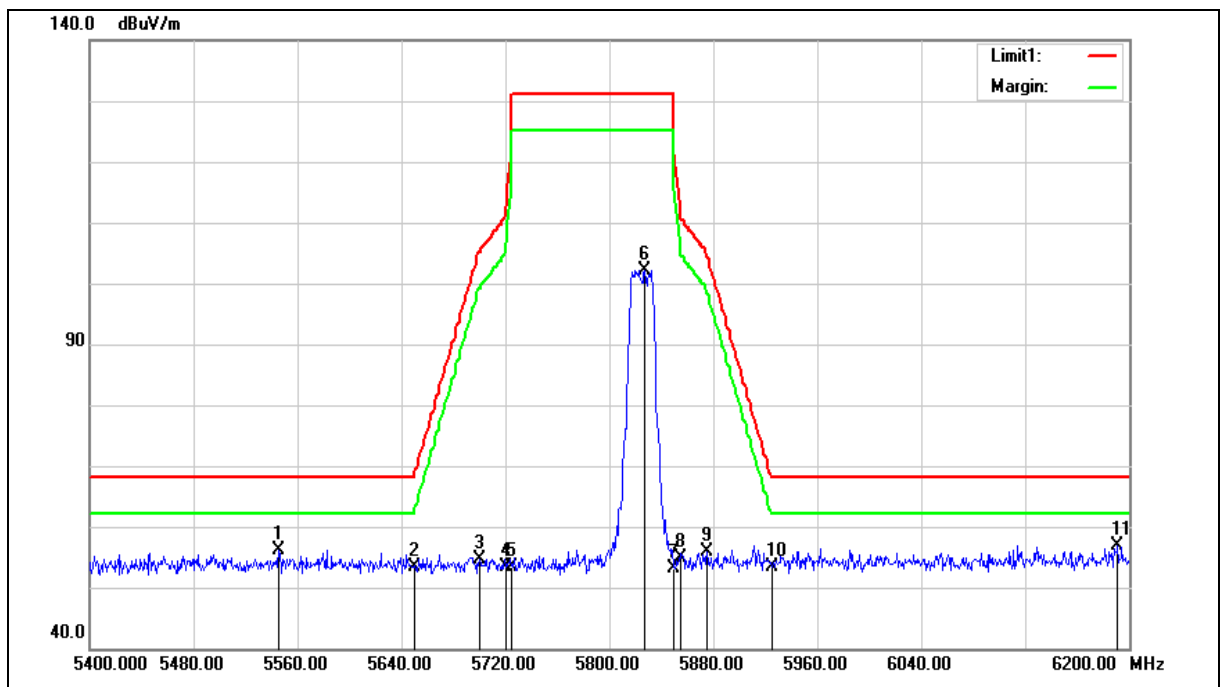

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5545.600	62.64	-6.51	56.13	68.20	-12.07	peak
2	5650.000	59.69	-6.28	53.41	68.20	-14.79	peak
3	5700.000	60.86	-6.17	54.69	105.20	-50.51	peak
4	5720.000	59.49	-6.12	53.37	110.80	-57.43	peak
5	5725.000	59.60	-6.11	53.49	122.20	-68.71	peak
6	5827.200	108.07	-5.89	102.18	--	--	peak
7	5850.000	58.90	-5.84	53.06	122.20	-69.14	peak
8	5855.000	60.64	-5.83	54.81	110.80	-55.99	peak
9	5875.000	61.71	-5.78	55.93	105.20	-49.27	peak
10	5925.000	59.03	-5.68	53.35	68.20	-14.85	peak
11	6191.200	61.70	-4.86	56.84	68.20	-11.36	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

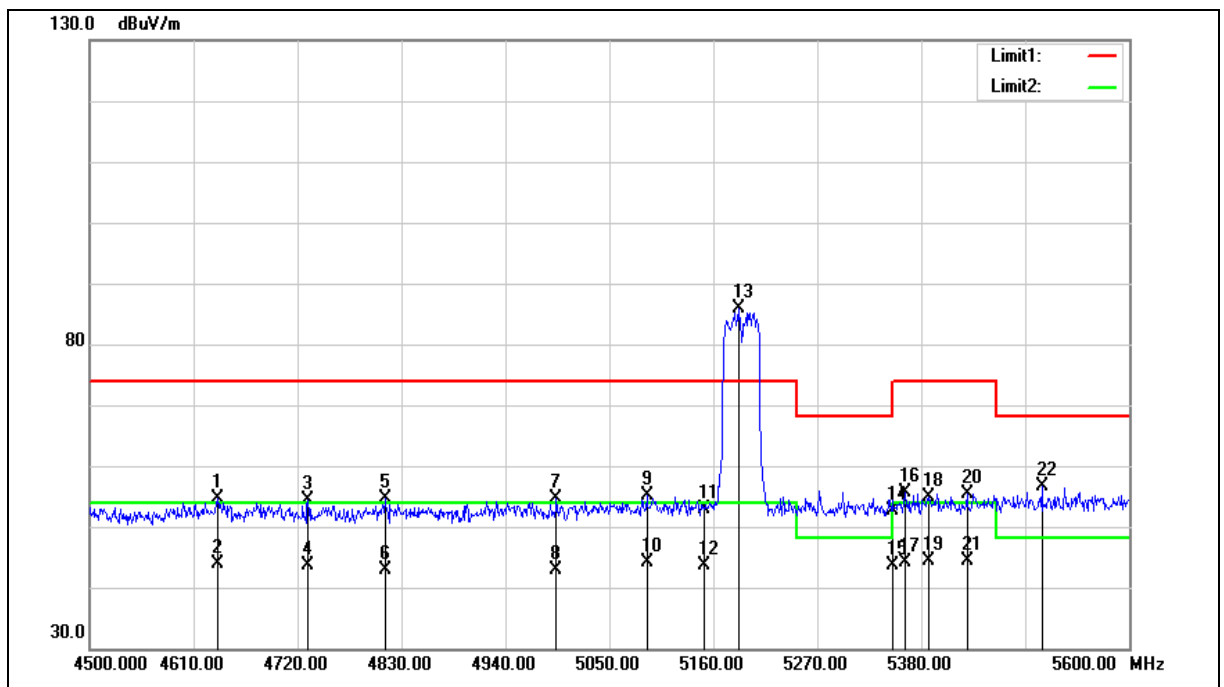

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4635.300	63.71	-9.10	54.61	74.00	-19.39	peak
2	4635.300	53.01	-9.10	43.91	54.00	-10.09	AVG
3	4731.000	63.23	-8.85	54.38	74.00	-19.62	peak
4	4731.000	52.41	-8.85	43.56	54.00	-10.44	AVG
5	4812.400	63.16	-8.63	54.53	74.00	-19.47	peak
6	4812.400	51.45	-8.63	42.82	54.00	-11.18	AVG
7	4993.900	62.72	-8.16	54.56	74.00	-19.44	peak
8	4993.900	51.12	-8.16	42.96	54.00	-11.04	AVG
9	5089.600	62.98	-7.87	55.11	74.00	-18.89	peak
10	5089.600	51.97	-7.87	44.10	54.00	-9.90	AVG
11	5150.000	60.48	-7.69	52.79	74.00	-21.21	peak
12	5150.000	51.29	-7.69	43.60	54.00	-10.40	AVG
13	5186.400	93.41	-7.57	85.84	--	--	peak
14	5350.000	59.75	-7.07	52.68	74.00	-21.32	peak
15	5350.000	50.75	-7.07	43.68	54.00	-10.32	AVG
16	5363.500	62.57	-7.04	55.53	74.00	-18.47	peak
17	5363.500	51.25	-7.04	44.21	54.00	-9.79	AVG
18	5387.700	61.93	-6.95	54.98	74.00	-19.02	peak
19	5387.700	51.30	-6.95	44.35	54.00	-9.65	AVG
20	5428.400	62.13	-6.83	55.30	74.00	-18.70	peak
21	5428.400	51.33	-6.83	44.50	54.00	-9.50	AVG
22	5507.600	63.15	-6.59	56.56	68.20	-11.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

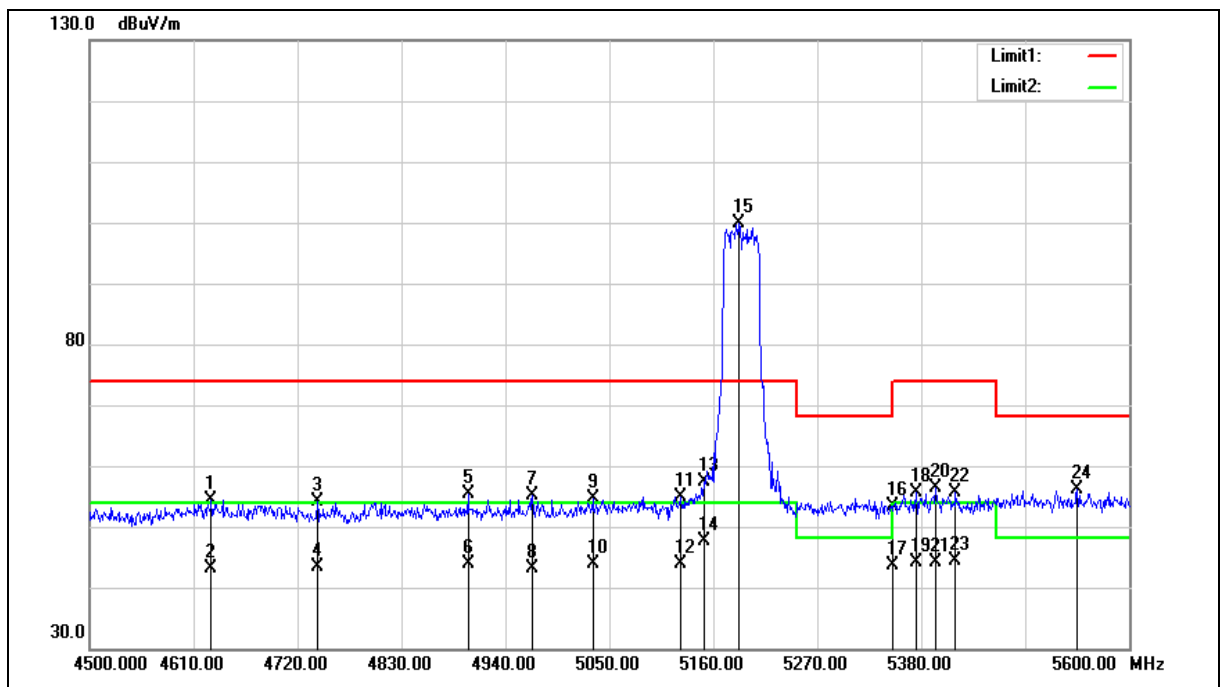

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4628.700	63.55	-9.12	54.43	74.00	-19.57	peak
2	4628.700	52.33	-9.12	43.21	54.00	-10.79	AVG
3	4740.900	63.02	-8.82	54.20	74.00	-19.80	peak
4	4740.900	52.10	-8.82	43.28	54.00	-10.72	AVG
5	4900.400	63.76	-8.41	55.35	74.00	-18.65	peak
6	4900.400	52.19	-8.41	43.78	54.00	-10.22	AVG
7	4968.600	63.34	-8.23	55.11	74.00	-18.89	peak
8	4968.600	51.32	-8.23	43.09	54.00	-10.91	AVG
9	5032.400	62.72	-8.05	54.67	74.00	-19.33	peak
10	5032.400	51.81	-8.05	43.76	54.00	-10.24	AVG
11	5124.800	62.61	-7.78	54.83	74.00	-19.17	peak
12	5124.800	51.54	-7.78	43.76	54.00	-10.24	AVG
13	5150.000	65.14	-7.69	57.45	74.00	-16.55	peak
14	5150.000	55.41	-7.69	47.72	54.00	-6.28	AVG
15	5186.400	107.33	-7.57	99.76	--	--	peak
16	5350.000	60.55	-7.07	53.48	74.00	-20.52	peak
17	5350.000	50.82	-7.07	43.75	54.00	-10.25	AVG
18	5374.500	62.53	-7.01	55.52	74.00	-18.48	peak
19	5374.500	51.26	-7.01	44.25	54.00	-9.75	AVG
20	5395.400	63.25	-6.93	56.32	74.00	-17.68	peak
21	5395.400	51.07	-6.93	44.14	54.00	-9.86	AVG
22	5416.300	62.37	-6.86	55.51	74.00	-18.49	peak
23	5416.300	51.23	-6.86	44.37	54.00	-9.63	AVG
24	5545.000	62.57	-6.51	56.06	68.20	-12.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

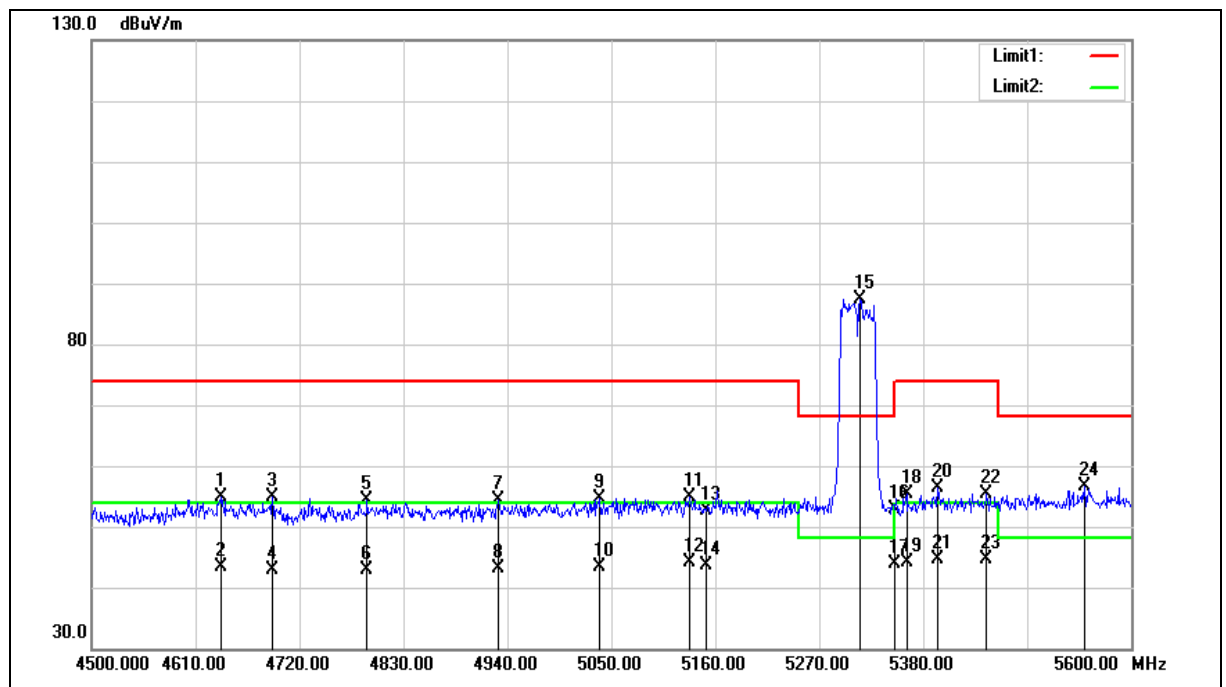

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4637.500	63.85	-9.09	54.76	74.00	-19.24	peak
2	4637.500	52.36	-9.09	43.27	54.00	-10.73	AVG
3	4691.400	63.76	-8.96	54.80	74.00	-19.20	peak
4	4691.400	51.93	-8.96	42.97	54.00	-11.03	AVG
5	4791.500	63.07	-8.70	54.37	74.00	-19.63	peak
6	4791.500	51.60	-8.70	42.90	54.00	-11.10	AVG
7	4930.100	62.68	-8.33	54.35	74.00	-19.65	peak
8	4930.100	51.50	-8.33	43.17	54.00	-10.83	AVG
9	5037.900	62.75	-8.03	54.72	74.00	-19.28	peak
10	5037.900	51.52	-8.03	43.49	54.00	-10.51	AVG
11	5132.500	62.54	-7.74	54.80	74.00	-19.20	peak
12	5132.500	51.86	-7.74	44.12	54.00	-9.88	AVG
13	5150.000	60.40	-7.69	52.71	74.00	-21.29	peak
14	5150.000	51.38	-7.69	43.69	54.00	-10.31	AVG
15	5312.900	94.63	-7.19	87.44	--	--	peak
16	5350.000	60.01	-7.07	52.94	74.00	-21.06	peak
17	5350.000	50.86	-7.07	43.79	54.00	-10.21	AVG
18	5362.400	62.43	-7.04	55.39	74.00	-18.61	peak
19	5362.400	51.28	-7.04	44.24	54.00	-9.76	AVG
20	5395.400	63.19	-6.93	56.26	74.00	-17.74	peak
21	5395.400	51.54	-6.93	44.61	54.00	-9.39	AVG
22	5447.100	62.26	-6.77	55.49	74.00	-18.51	peak
23	5447.100	51.44	-6.77	44.67	54.00	-9.33	AVG
24	5550.500	63.04	-6.50	56.54	68.20	-11.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

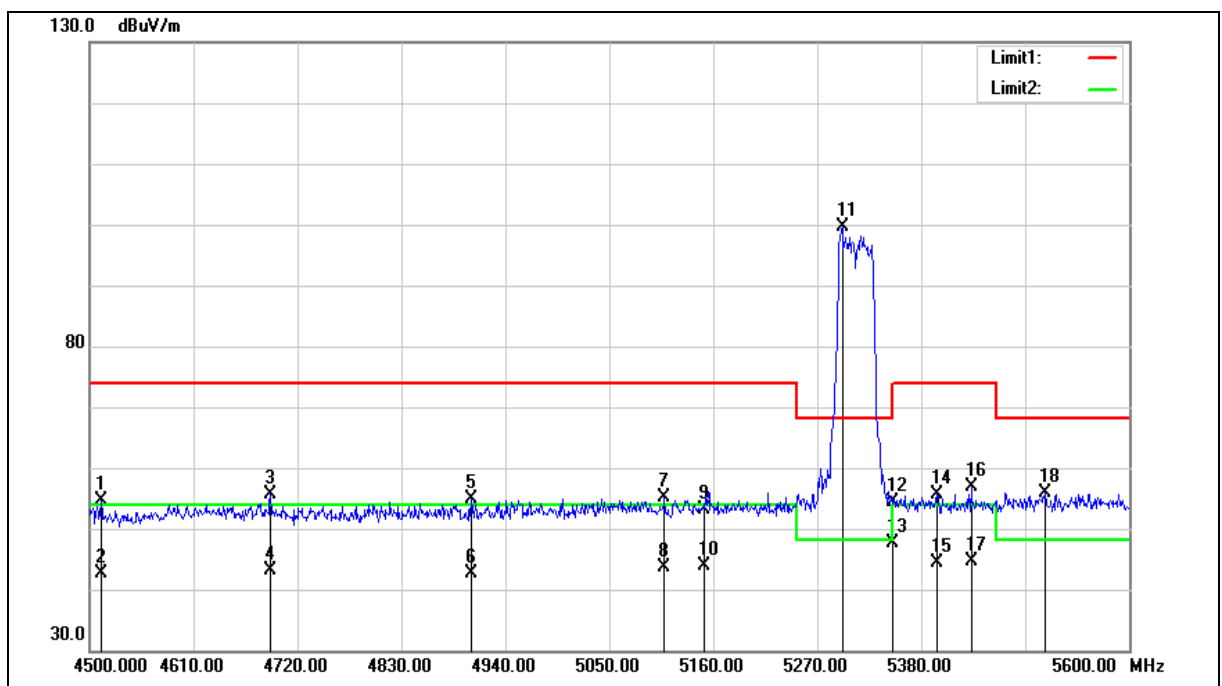

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4512.100	64.14	-9.41	54.73	74.00	-19.27	peak
2	4512.100	52.02	-9.41	42.61	54.00	-11.39	AVG
3	4691.400	64.60	-8.96	55.64	74.00	-18.36	peak
4	4691.400	52.05	-8.96	43.09	54.00	-10.91	AVG
5	4903.700	63.38	-8.40	54.98	74.00	-19.02	peak
6	4903.700	51.10	-8.40	42.70	54.00	-11.30	AVG
7	5108.300	63.02	-7.82	55.20	74.00	-18.80	peak
8	5108.300	51.56	-7.82	43.74	54.00	-10.26	AVG
9	5150.000	60.92	-7.69	53.23	74.00	-20.77	peak
10	5150.000	51.63	-7.69	43.94	54.00	-10.06	AVG
11	5296.400	106.75	-7.24	99.51	--	--	peak
12	5350.000	61.45	-7.07	54.38	74.00	-19.62	peak
13	5350.000	54.69	-7.07	47.62	54.00	-6.38	AVG
14	5396.500	62.48	-6.93	55.55	74.00	-18.45	peak
15	5396.500	51.41	-6.93	44.48	54.00	-9.52	AVG
16	5432.800	63.69	-6.82	56.87	74.00	-17.13	peak
17	5432.800	51.35	-6.82	44.53	54.00	-9.47	AVG
18	5510.900	62.49	-6.59	55.90	68.20	-12.30	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

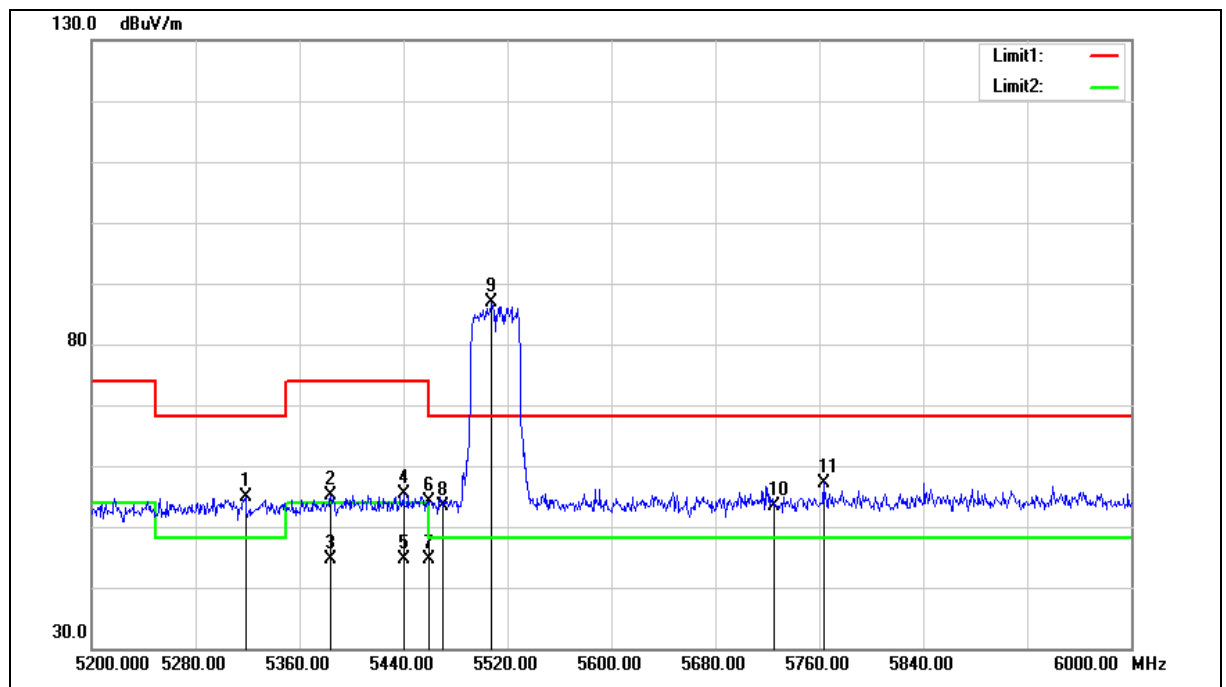

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5318.400	62.14	-7.17	54.97	68.20	-13.23	peak
2	5384.000	62.21	-6.97	55.24	74.00	-18.76	peak
3	5384.000	51.59	-6.97	44.62	54.00	-9.38	AVG
4	5440.000	62.13	-6.80	55.33	74.00	-18.67	peak
5	5440.000	51.37	-6.80	44.57	54.00	-9.43	AVG
6	5460.000	60.85	-6.73	54.12	74.00	-19.88	peak
7	5460.000	51.25	-6.73	44.52	54.00	-9.48	AVG
8	5470.000	60.10	-6.70	53.40	68.20	-14.80	peak
9	5508.000	93.38	-6.59	86.79	--	--	peak
10	5725.000	59.44	-6.11	53.33	68.20	-14.87	peak
11	5763.200	63.28	-6.03	57.25	68.20	-10.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

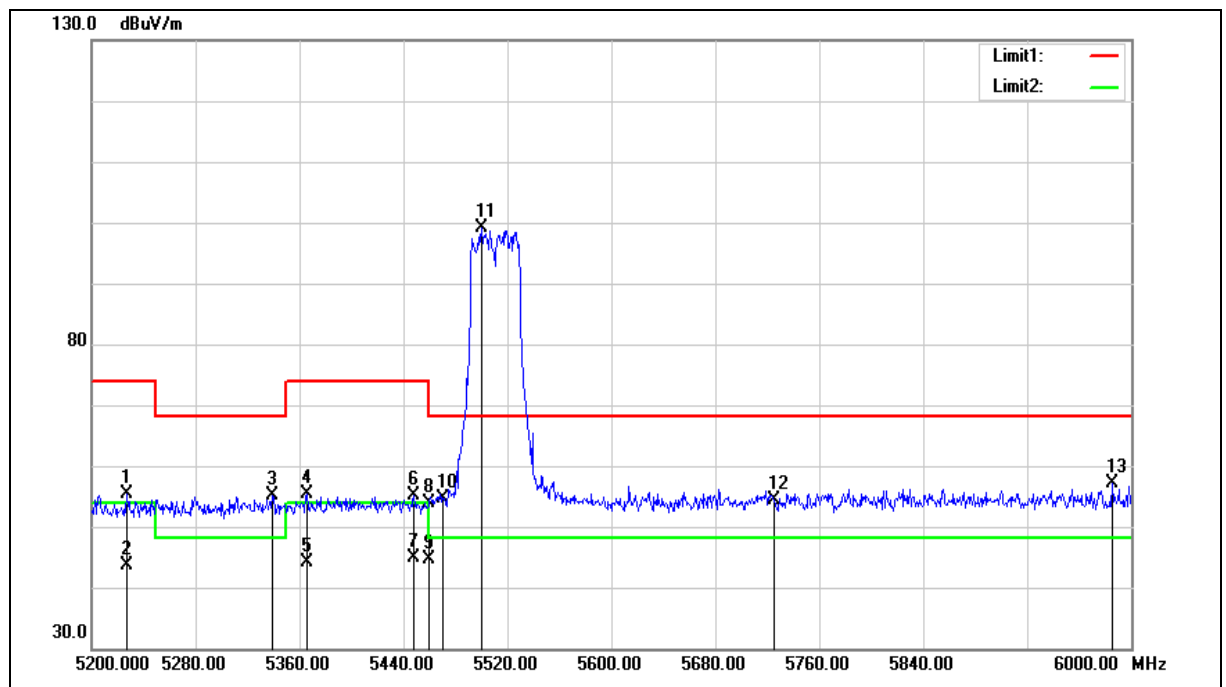

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5227.200	62.75	-7.45	55.30	74.00	-18.70	peak
2	5227.200	51.09	-7.45	43.64	54.00	-10.36	AVG
3	5339.200	62.35	-7.11	55.24	68.20	-12.96	peak
4	5365.600	62.36	-7.02	55.34	74.00	-18.66	peak
5	5365.600	51.11	-7.02	44.09	54.00	-9.91	AVG
6	5448.000	61.77	-6.76	55.01	74.00	-18.99	peak
7	5448.000	51.73	-6.76	44.97	54.00	-9.03	AVG
8	5460.000	60.53	-6.73	53.80	74.00	-20.20	peak
9	5460.000	51.37	-6.73	44.64	54.00	-9.36	AVG
10	5470.000	61.40	-6.70	54.70	68.20	-13.50	peak
11	5500.000	105.83	-6.61	99.22	--	--	peak
12	5725.000	60.39	-6.11	54.28	68.20	-13.92	peak
13	5985.600	62.65	-5.53	57.12	68.20	-11.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

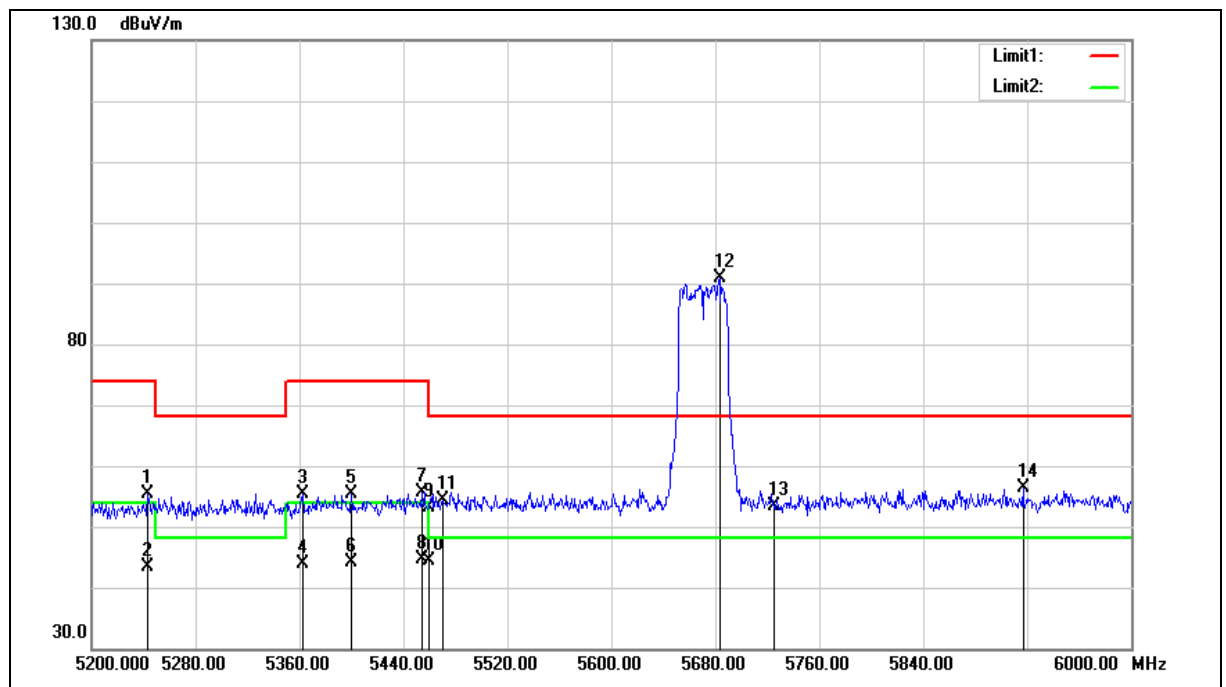

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5243.200	62.73	-7.40	55.33	74.00	-18.67	peak
2	5243.200	50.88	-7.40	43.48	54.00	-10.52	AVG
3	5362.400	62.36	-7.04	55.32	74.00	-18.68	peak
4	5362.400	50.96	-7.04	43.92	54.00	-10.08	AVG
5	5400.000	62.23	-6.92	55.31	74.00	-18.69	peak
6	5400.000	50.98	-6.92	44.06	54.00	-9.94	AVG
7	5454.400	62.31	-6.75	55.56	74.00	-18.44	peak
8	5454.400	51.31	-6.75	44.56	54.00	-9.44	AVG
9	5460.000	59.78	-6.73	53.05	74.00	-20.95	peak
10	5460.000	51.05	-6.73	44.32	54.00	-9.68	AVG
11	5470.000	61.00	-6.70	54.30	68.20	-13.90	peak
12	5683.200	97.09	-6.21	90.88	--	--	peak
13	5725.000	59.47	-6.11	53.36	68.20	-14.84	peak
14	5916.800	61.96	-5.69	56.27	68.20	-11.93	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

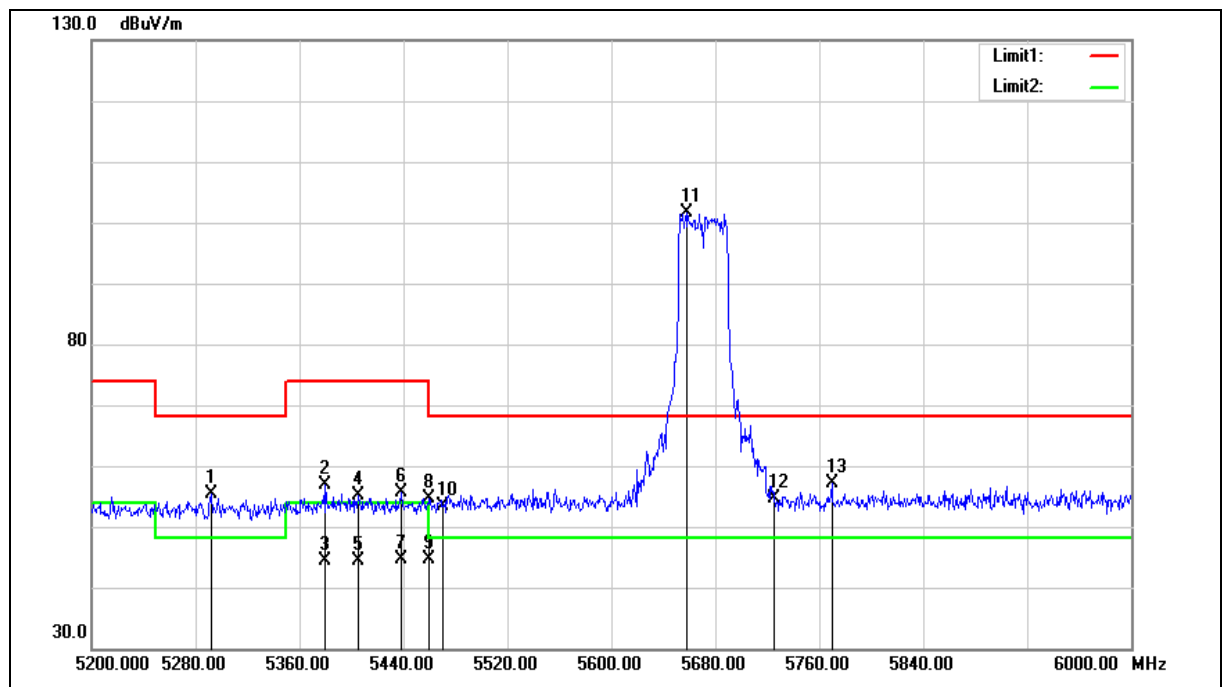

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5292.000	62.64	-7.25	55.39	68.20	-12.81	peak
2	5380.000	63.80	-6.98	56.82	74.00	-17.18	peak
3	5380.000	51.36	-6.98	44.38	54.00	-9.62	AVG
4	5404.800	62.08	-6.91	55.17	74.00	-18.83	peak
5	5404.800	51.26	-6.91	44.35	54.00	-9.65	AVG
6	5438.400	62.37	-6.80	55.57	74.00	-18.43	peak
7	5438.400	51.39	-6.80	44.59	54.00	-9.41	AVG
8	5460.000	61.25	-6.73	54.52	74.00	-19.48	peak
9	5460.000	51.24	-6.73	44.51	54.00	-9.49	AVG
10	5470.000	60.17	-6.70	53.47	68.20	-14.73	peak
11	5658.400	107.95	-6.26	101.69	--	--	peak
12	5725.000	60.84	-6.11	54.73	68.20	-13.47	peak
13	5769.600	63.16	-6.02	57.14	68.20	-11.06	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

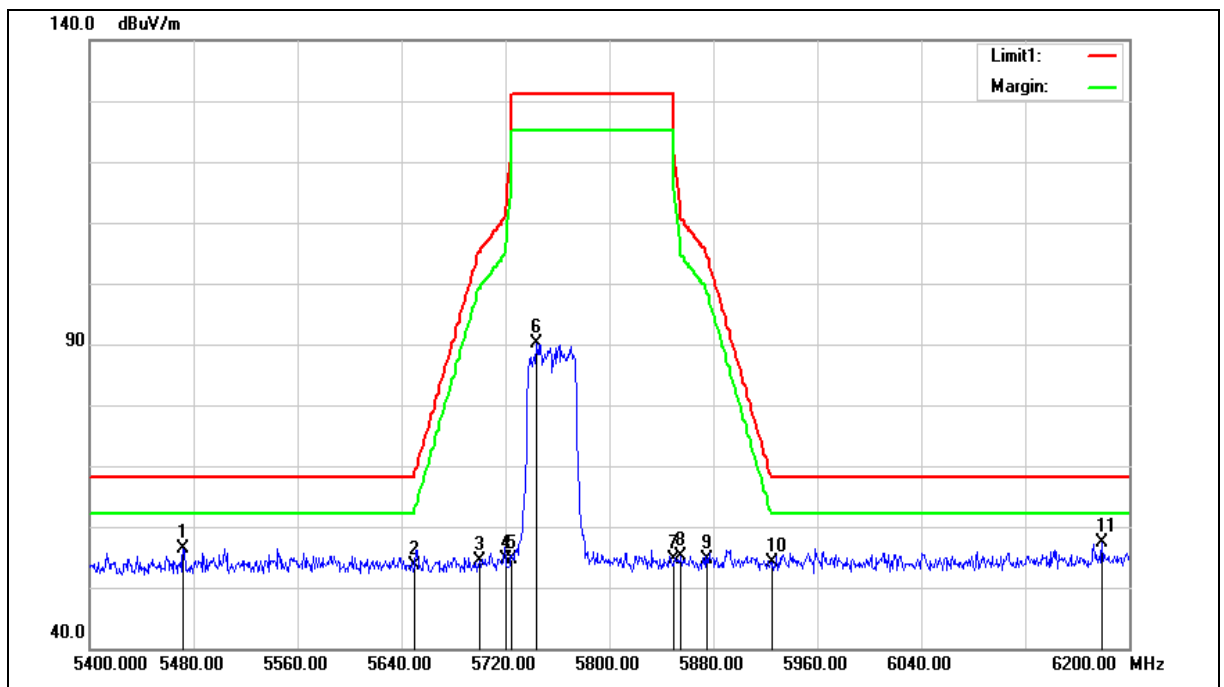

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5472.000	63.13	-6.70	56.43	68.20	-11.77	peak
2	5650.000	59.83	-6.28	53.55	68.20	-14.65	peak
3	5700.000	60.47	-6.17	54.30	105.20	-50.90	peak
4	5720.000	60.82	-6.12	54.70	110.80	-56.10	peak
5	5725.000	60.82	-6.11	54.71	122.20	-67.49	peak
6	5744.000	96.20	-6.08	90.12	--	--	peak
7	5850.000	60.59	-5.84	54.75	122.20	-67.45	peak
8	5855.000	61.06	-5.83	55.23	110.80	-55.57	peak
9	5875.000	60.51	-5.78	54.73	105.20	-50.47	peak
10	5925.000	59.78	-5.68	54.10	68.20	-14.10	peak
11	6179.200	62.31	-4.90	57.41	68.20	-10.79	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

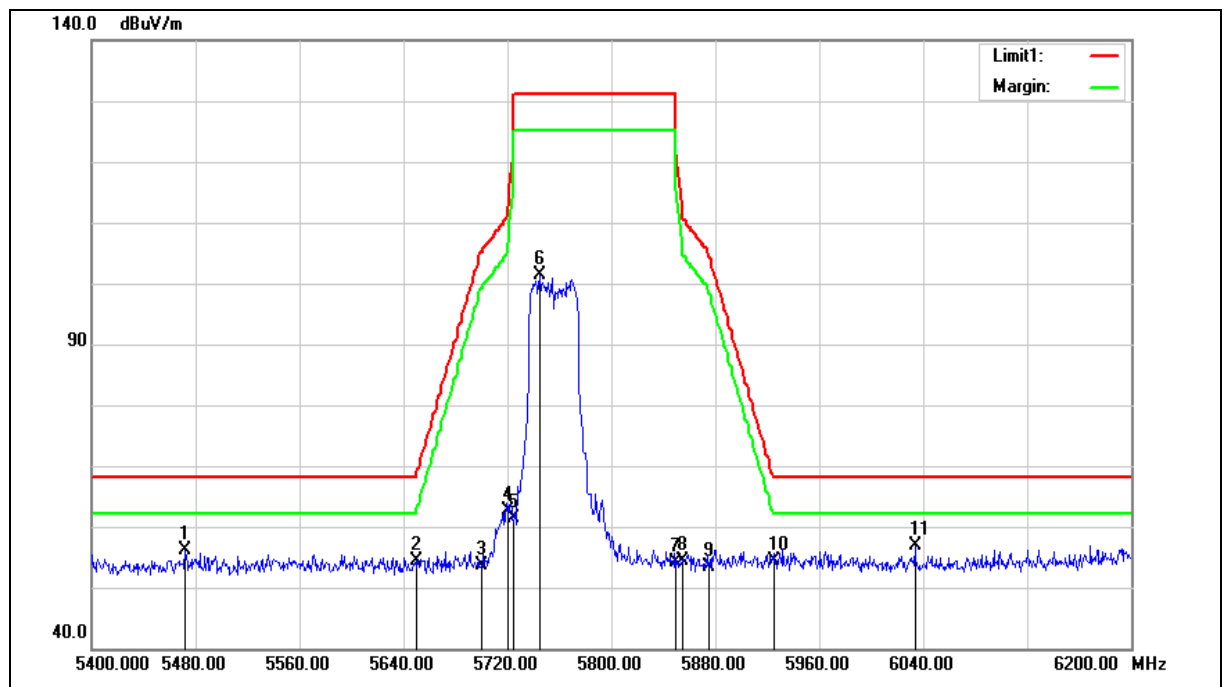

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5472.000	62.79	-6.70	56.09	68.20	-12.11	peak
2	5650.000	60.73	-6.28	54.45	68.20	-13.75	peak
3	5700.000	59.81	-6.17	53.64	105.20	-51.56	peak
4	5720.000	68.75	-6.12	62.63	110.80	-48.17	peak
5	5725.000	67.58	-6.11	61.47	122.20	-60.73	peak
6	5744.800	107.48	-6.08	101.40	--	--	peak
7	5850.000	59.89	-5.84	54.05	122.20	-68.15	peak
8	5855.000	60.24	-5.83	54.41	110.80	-56.39	peak
9	5875.000	59.27	-5.78	53.49	105.20	-51.71	peak
10	5925.000	60.08	-5.68	54.40	68.20	-13.80	peak
11	6033.600	62.29	-5.39	56.90	68.20	-11.30	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

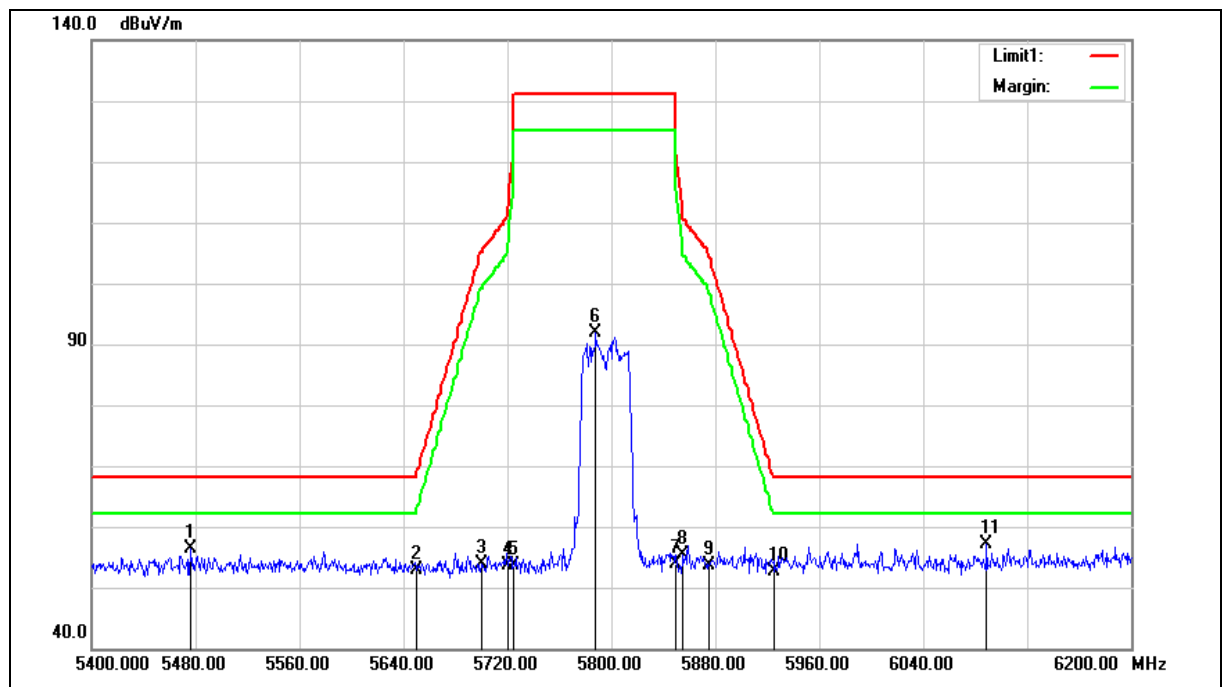

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5476.000	63.06	-6.68	56.38	68.20	-11.82	peak
2	5650.000	59.16	-6.28	52.88	68.20	-15.32	peak
3	5700.000	59.93	-6.17	53.76	105.20	-51.44	peak
4	5720.000	59.68	-6.12	53.56	110.80	-57.24	peak
5	5725.000	59.84	-6.11	53.73	122.20	-68.47	peak
6	5788.000	97.80	-5.98	91.82	--	--	peak
7	5850.000	59.64	-5.84	53.80	122.20	-68.40	peak
8	5855.000	61.24	-5.83	55.41	110.80	-55.39	peak
9	5875.000	59.44	-5.78	53.66	105.20	-51.54	peak
10	5925.000	58.24	-5.68	52.56	68.20	-15.64	peak
11	6088.800	62.33	-5.21	57.12	68.20	-11.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

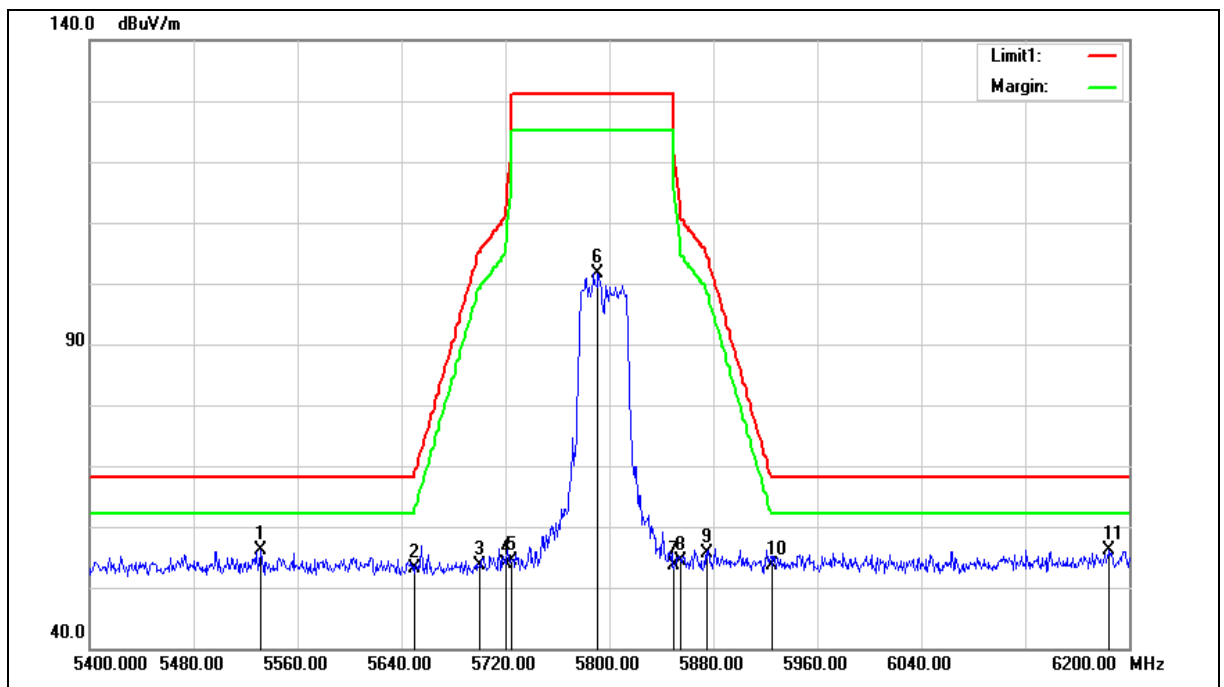

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5532.000	62.76	-6.54	56.22	68.20	-11.98	peak
2	5650.000	59.41	-6.28	53.13	68.20	-15.07	peak
3	5700.000	59.73	-6.17	53.56	105.20	-51.64	peak
4	5720.000	60.02	-6.12	53.90	110.80	-56.90	peak
5	5725.000	60.51	-6.11	54.40	122.20	-67.80	peak
6	5791.200	107.55	-5.97	101.58	--	--	peak
7	5850.000	59.37	-5.84	53.53	122.20	-68.67	peak
8	5855.000	60.25	-5.83	54.42	110.80	-56.38	peak
9	5875.000	61.41	-5.78	55.63	105.20	-49.57	peak
10	5925.000	59.42	-5.68	53.74	68.20	-14.46	peak
11	6184.800	61.12	-4.88	56.24	68.20	-11.96	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

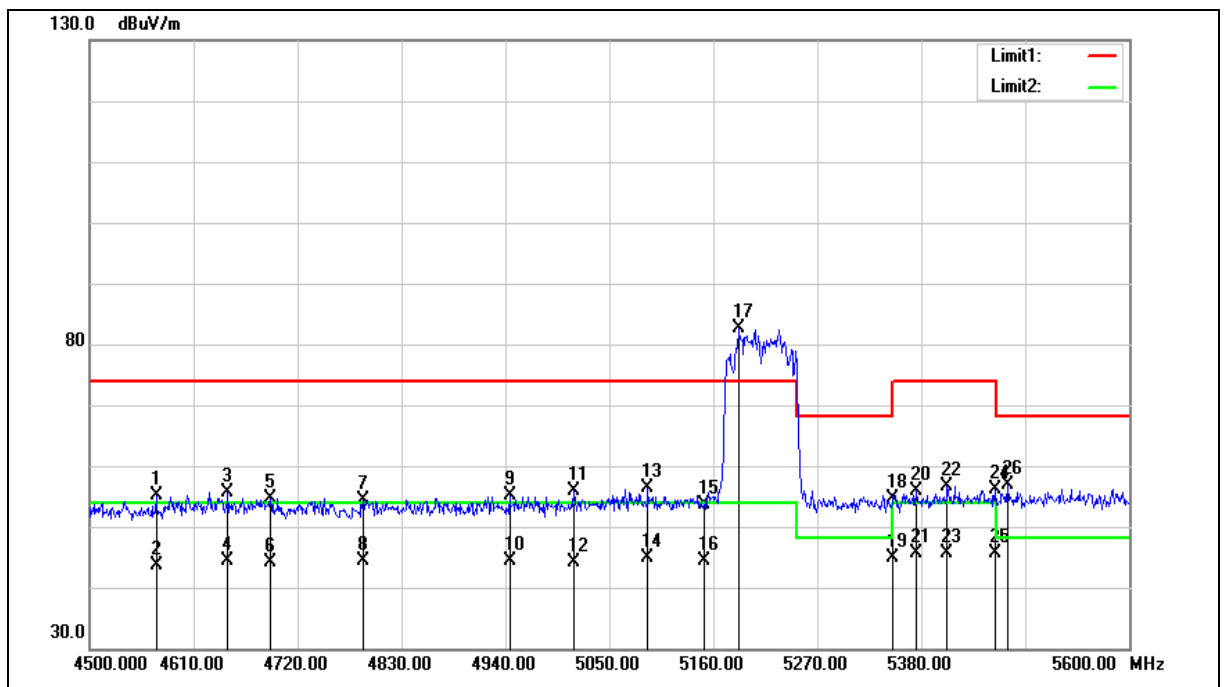

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4570.400	64.30	-9.27	55.03	74.00	-18.97	peak
2	4570.400	52.95	-9.27	43.68	54.00	-10.32	AVG
3	4646.300	64.62	-9.07	55.55	74.00	-18.45	peak
4	4646.300	53.55	-9.07	44.48	54.00	-9.52	AVG
5	4691.400	63.63	-8.96	54.67	74.00	-19.33	peak
6	4691.400	53.00	-8.96	44.04	54.00	-9.96	AVG
7	4789.300	63.13	-8.70	54.43	74.00	-19.57	peak
8	4789.300	52.98	-8.70	44.28	54.00	-9.72	AVG
9	4944.400	63.47	-8.29	55.18	74.00	-18.82	peak
10	4944.400	52.63	-8.29	44.34	54.00	-9.66	AVG
11	5012.600	63.98	-8.12	55.86	74.00	-18.14	peak
12	5012.600	52.30	-8.12	44.18	54.00	-9.82	AVG
13	5090.700	64.28	-7.87	56.41	74.00	-17.59	peak
14	5090.700	52.76	-7.87	44.89	54.00	-9.11	AVG
15	5150.000	61.32	-7.69	53.63	74.00	-20.37	peak
16	5150.000	52.11	-7.69	44.42	54.00	-9.58	AVG
17	5186.400	90.20	-7.57	82.63	--	--	peak
18	5350.000	61.58	-7.07	54.51	74.00	-19.49	peak
19	5350.000	51.86	-7.07	44.79	54.00	-9.21	AVG
20	5374.500	62.99	-7.01	55.98	74.00	-18.02	peak
21	5374.500	52.53	-7.01	45.52	54.00	-8.48	AVG
22	5407.500	63.58	-6.90	56.68	74.00	-17.32	peak
23	5407.500	52.54	-6.90	45.64	54.00	-8.36	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
24	5458.100	62.98	-6.74	56.24	74.00	-17.76	peak
25	5458.100	52.42	-6.74	45.68	54.00	-8.32	AVG
26	5471.300	63.53	-6.70	56.83	68.20	-11.37	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

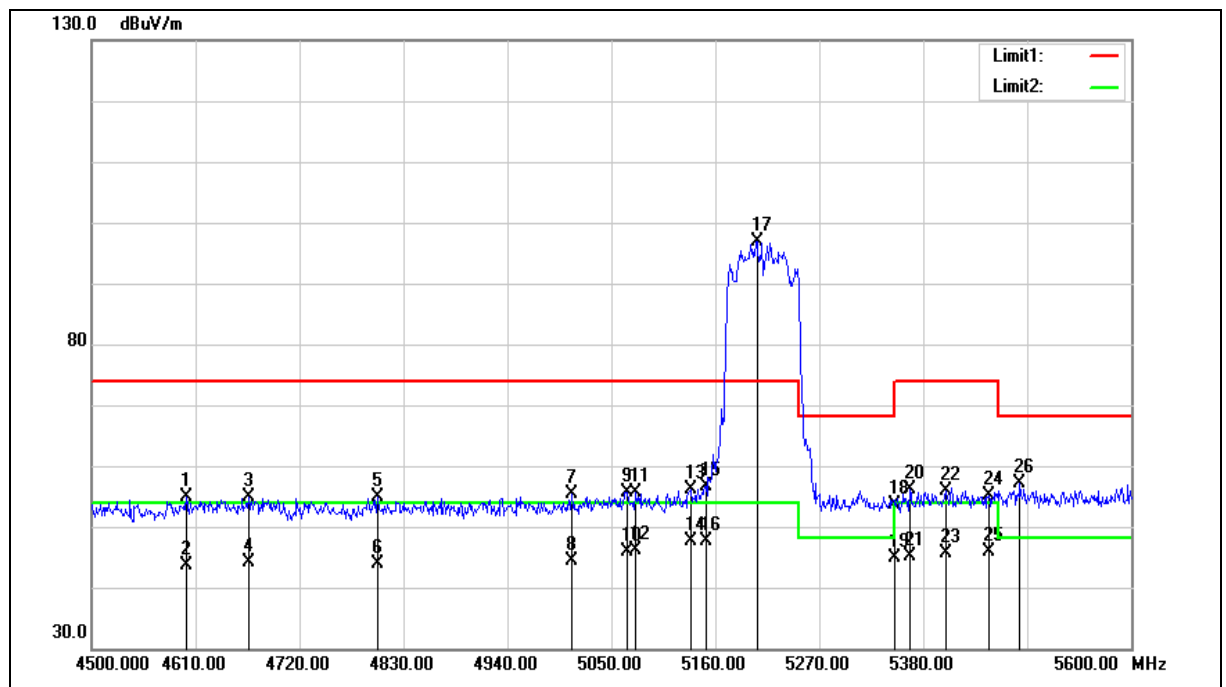

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4600.100	63.95	-9.19	54.76	74.00	-19.24	peak
2	4600.100	52.72	-9.19	43.53	54.00	-10.47	AVG
3	4666.100	63.93	-9.01	54.92	74.00	-19.08	peak
4	4666.100	53.05	-9.01	44.04	54.00	-9.96	AVG
5	4802.500	63.52	-8.66	54.86	74.00	-19.14	peak
6	4802.500	52.63	-8.66	43.97	54.00	-10.03	AVG
7	5008.200	63.48	-8.13	55.35	74.00	-18.65	peak
8	5008.200	52.55	-8.13	44.42	54.00	-9.58	AVG
9	5066.500	63.61	-7.94	55.67	74.00	-18.33	peak
10	5066.500	53.91	-7.94	45.97	54.00	-8.03	AVG
11	5075.300	63.63	-7.91	55.72	74.00	-18.28	peak
12	5075.300	54.05	-7.91	46.14	54.00	-7.86	AVG
13	5134.700	63.81	-7.74	56.07	74.00	-17.93	peak
14	5134.700	55.28	-7.74	47.54	54.00	-6.46	AVG
15	5150.000	64.25	-7.69	56.56	74.00	-17.44	peak
16	5150.000	55.44	-7.69	47.75	54.00	-6.25	AVG
17	5204.000	104.35	-7.52	96.83	--	--	peak
18	5350.000	60.75	-7.07	53.68	74.00	-20.32	peak
19	5350.000	51.98	-7.07	44.91	54.00	-9.09	AVG
20	5365.700	63.06	-7.02	56.04	74.00	-17.96	peak
21	5365.700	52.25	-7.02	45.23	54.00	-8.77	AVG
22	5404.200	62.77	-6.91	55.86	74.00	-18.14	peak
23	5404.200	52.51	-6.91	45.60	54.00	-8.40	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
24	5449.300	61.78	-6.76	55.02	74.00	-18.98	peak
25	5449.300	52.67	-6.76	45.91	54.00	-8.09	AVG
26	5482.300	63.76	-6.66	57.10	68.20	-11.10	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

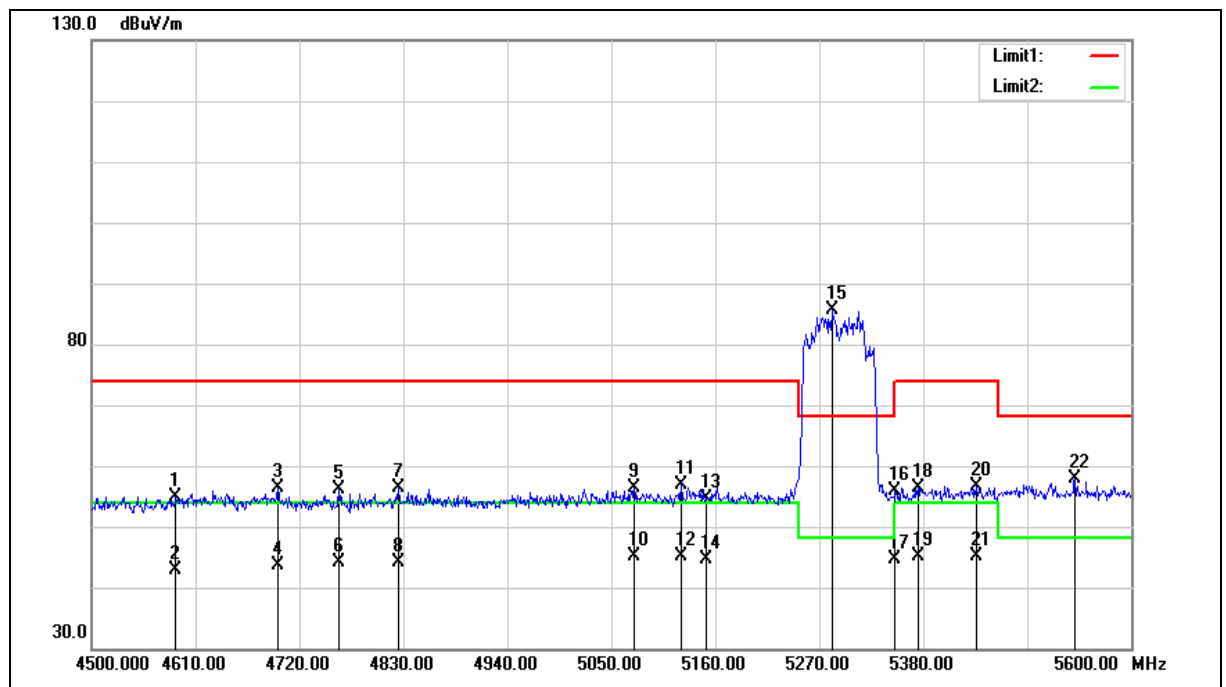

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4589.100	64.13	-9.22	54.91	74.00	-19.09	peak
2	4589.100	52.19	-9.22	42.97	54.00	-11.03	AVG
3	4696.900	65.25	-8.94	56.31	74.00	-17.69	peak
4	4696.900	52.66	-8.94	43.72	54.00	-10.28	AVG
5	4761.800	64.79	-8.77	56.02	74.00	-17.98	peak
6	4761.800	52.80	-8.77	44.03	54.00	-9.97	AVG
7	4824.500	64.99	-8.61	56.38	74.00	-17.62	peak
8	4824.500	52.75	-8.61	44.14	54.00	-9.86	AVG
9	5074.200	64.20	-7.93	56.27	74.00	-17.73	peak
10	5074.200	52.99	-7.93	45.06	54.00	-8.94	AVG
11	5123.700	64.58	-7.78	56.80	74.00	-17.20	peak
12	5123.700	52.86	-7.78	45.08	54.00	-8.92	AVG
13	5150.000	62.32	-7.69	54.63	74.00	-19.37	peak
14	5150.000	52.38	-7.69	44.69	54.00	-9.31	AVG
15	5283.200	92.98	-7.28	85.70	--	--	peak
16	5350.000	62.89	-7.07	55.82	74.00	-18.18	peak
17	5350.000	51.69	-7.07	44.62	54.00	-9.38	AVG
18	5374.500	63.38	-7.01	56.37	74.00	-17.63	peak
19	5374.500	52.25	-7.01	45.24	54.00	-8.76	AVG
20	5436.100	63.44	-6.81	56.63	74.00	-17.37	peak
21	5436.100	51.94	-6.81	45.13	54.00	-8.87	AVG
22	5540.600	64.48	-6.52	57.96	68.20	-10.24	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

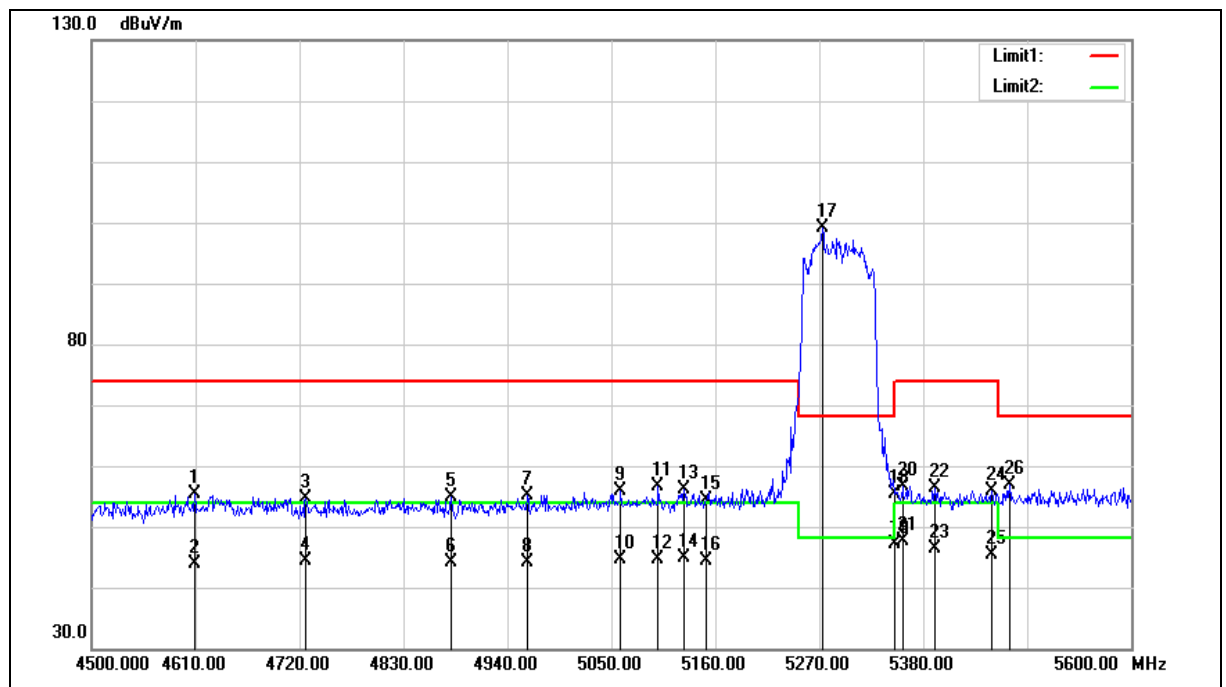

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4608.900	64.51	-9.16	55.35	74.00	-18.65	peak
2	4608.900	53.09	-9.16	43.93	54.00	-10.07	AVG
3	4726.600	63.59	-8.86	54.73	74.00	-19.27	peak
4	4726.600	53.36	-8.86	44.50	54.00	-9.50	AVG
5	4880.600	63.21	-8.45	54.76	74.00	-19.24	peak
6	4880.600	52.51	-8.45	44.06	54.00	-9.94	AVG
7	4960.900	63.34	-8.26	55.08	74.00	-18.92	peak
8	4960.900	52.32	-8.26	44.06	54.00	-9.94	AVG
9	5059.900	63.84	-7.96	55.88	74.00	-18.12	peak
10	5059.900	52.58	-7.96	44.62	54.00	-9.38	AVG
11	5099.500	64.55	-7.84	56.71	74.00	-17.29	peak
12	5099.500	52.51	-7.84	44.67	54.00	-9.33	AVG
13	5127.000	63.87	-7.75	56.12	74.00	-17.88	peak
14	5127.000	52.54	-7.75	44.79	54.00	-9.21	AVG
15	5150.000	62.12	-7.69	54.43	74.00	-19.57	peak
16	5150.000	52.11	-7.69	44.42	54.00	-9.58	AVG
17	5273.300	106.56	-7.31	99.25	--	--	peak
18	5350.000	62.35	-7.07	55.28	74.00	-18.72	peak
19	5350.000	54.20	-7.07	47.13	54.00	-6.87	AVG
20	5358.000	63.73	-7.05	56.68	74.00	-17.32	peak
21	5358.000	54.63	-7.05	47.58	54.00	-6.42	AVG
22	5392.100	63.35	-6.94	56.41	74.00	-17.59	peak
23	5392.100	53.38	-6.94	46.44	54.00	-7.56	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
24	5452.600	62.69	-6.76	55.93	74.00	-18.07	peak
25	5452.600	52.25	-6.76	45.49	54.00	-8.51	AVG
26	5471.300	63.61	-6.70	56.91	68.20	-11.29	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

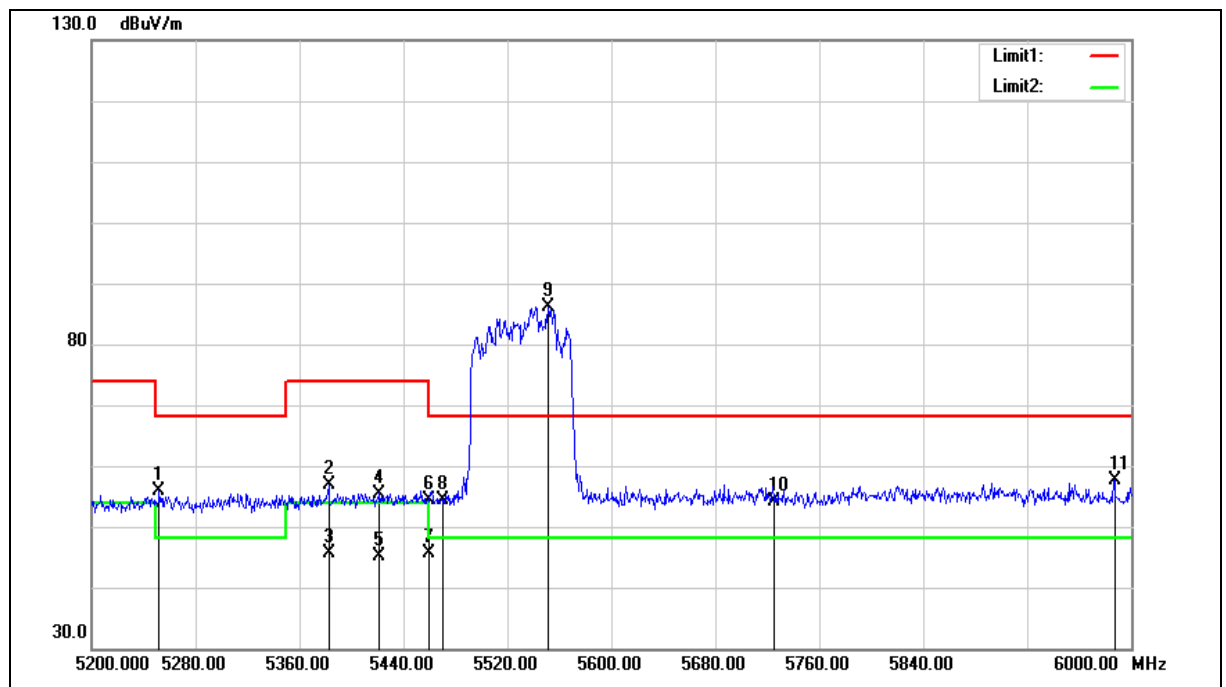

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5252.000	63.23	-7.38	55.85	68.20	-12.35	peak
2	5382.400	63.94	-6.97	56.97	74.00	-17.03	peak
3	5382.400	52.48	-6.97	45.51	54.00	-8.49	AVG
4	5421.600	62.35	-6.85	55.50	74.00	-18.50	peak
5	5421.600	52.04	-6.85	45.19	54.00	-8.81	AVG
6	5460.000	61.11	-6.73	54.38	74.00	-19.62	peak
7	5460.000	52.37	-6.73	45.64	54.00	-8.36	AVG
8	5470.000	61.12	-6.70	54.42	68.20	-13.78	peak
9	5551.200	92.72	-6.50	86.22	--	--	peak
10	5725.000	60.22	-6.11	54.11	68.20	-14.09	peak
11	5987.200	63.12	-5.53	57.59	68.20	-10.61	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

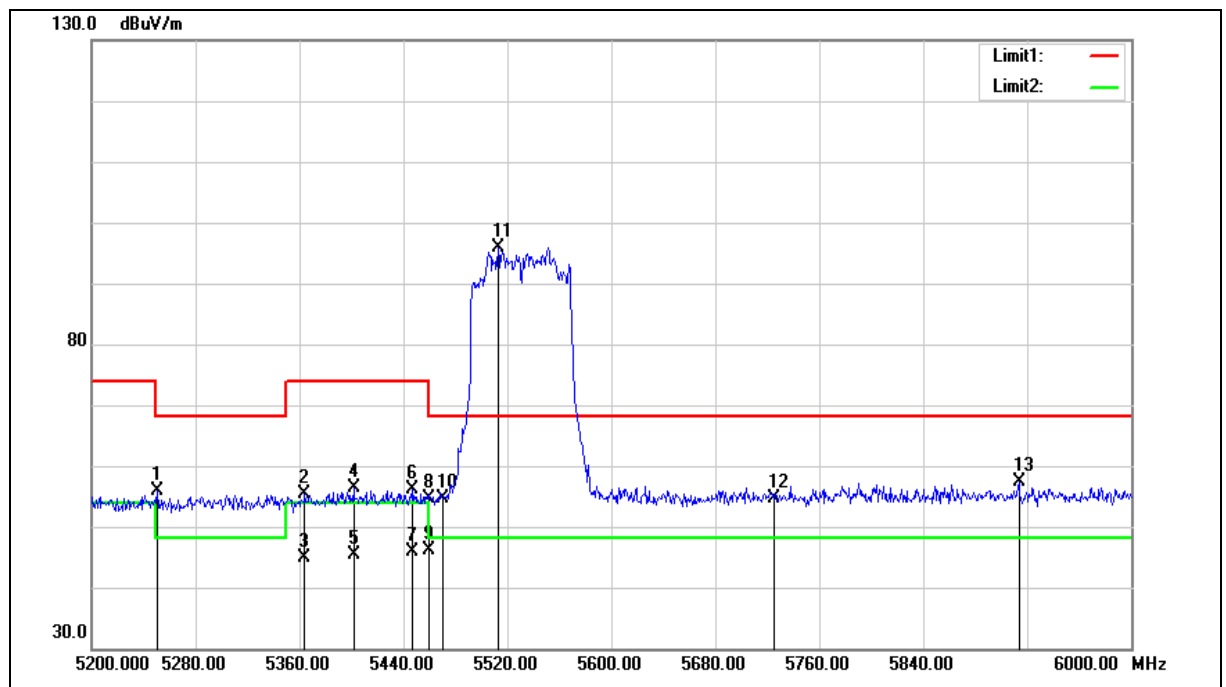

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5250.400	63.36	-7.38	55.98	68.20	-12.22	peak
2	5364.000	62.48	-7.03	55.45	74.00	-18.55	peak
3	5364.000	51.83	-7.03	44.80	54.00	-9.20	AVG
4	5401.600	63.37	-6.92	56.45	74.00	-17.55	peak
5	5401.600	52.31	-6.92	45.39	54.00	-8.61	AVG
6	5447.200	62.83	-6.77	56.06	74.00	-17.94	peak
7	5447.200	52.56	-6.77	45.79	54.00	-8.21	AVG
8	5460.000	61.41	-6.73	54.68	74.00	-19.32	peak
9	5460.000	52.79	-6.73	46.06	54.00	-7.94	AVG
10	5470.000	61.31	-6.70	54.61	68.20	-13.59	peak
11	5512.800	102.55	-6.59	95.96	--	--	peak
12	5725.000	60.74	-6.11	54.63	68.20	-13.57	peak
13	5913.600	63.05	-5.70	57.35	68.20	-10.85	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		

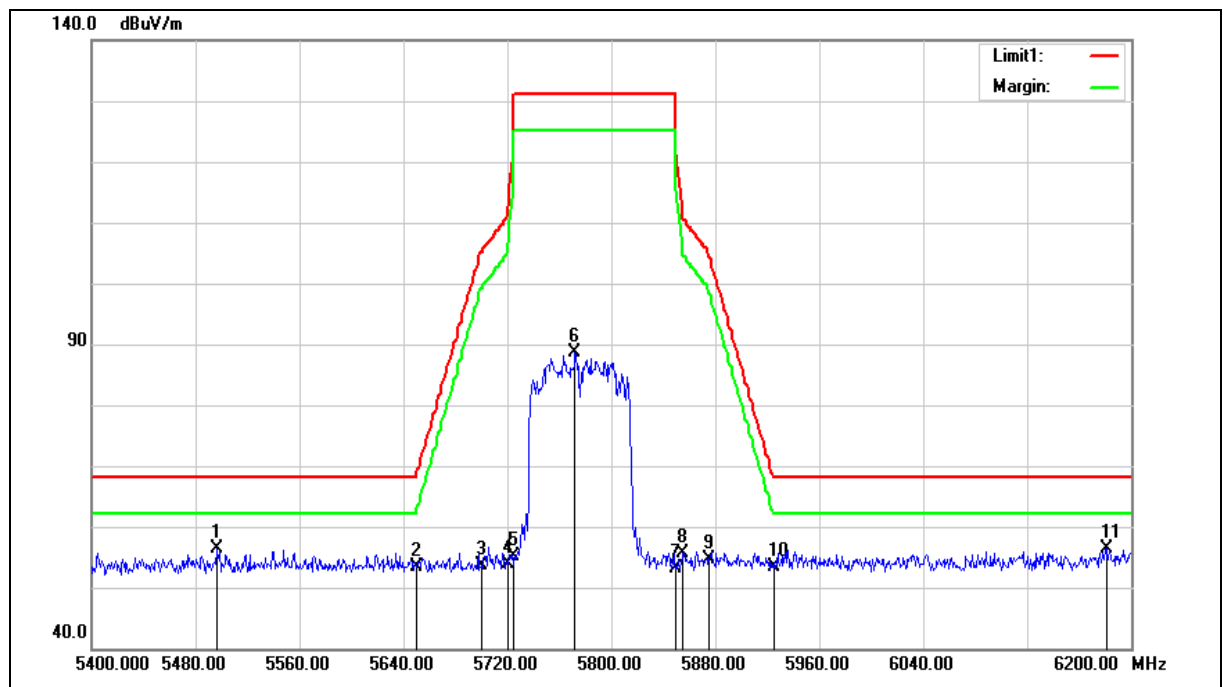

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 11		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5496.800	63.02	-6.62	56.40	68.20	-11.80	peak
2	5650.000	59.71	-6.28	53.43	68.20	-14.77	peak
3	5700.000	59.84	-6.17	53.67	105.20	-51.53	peak
4	5720.000	59.89	-6.12	53.77	110.80	-57.03	peak
5	5725.000	61.29	-6.11	55.18	122.20	-67.02	peak
6	5772.000	94.67	-6.01	88.66	--	--	peak
7	5850.000	58.98	-5.84	53.14	122.20	-69.06	peak
8	5855.000	61.58	-5.83	55.75	110.80	-55.05	peak
9	5875.000	60.32	-5.78	54.54	105.20	-50.66	peak
10	5925.000	59.09	-5.68	53.41	68.20	-14.79	peak
11	6180.800	61.34	-4.89	56.45	68.20	-11.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		

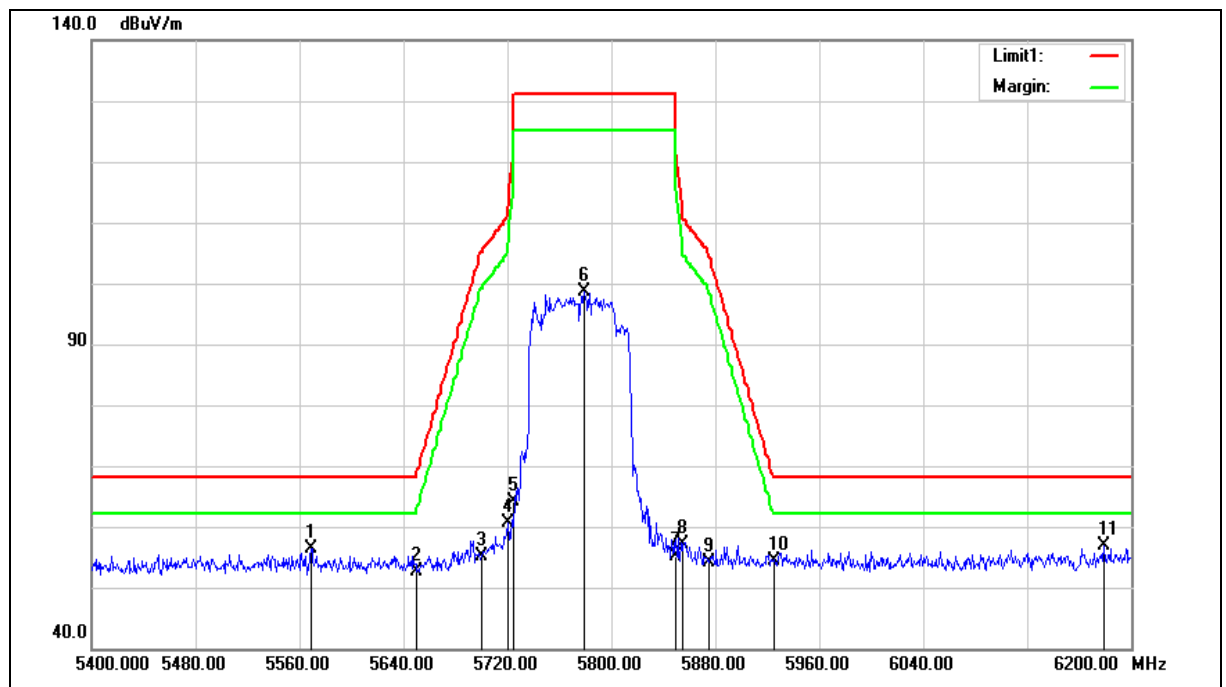

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 11		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5568.800	62.90	-6.45	56.45	68.20	-11.75	peak
2	5650.000	58.80	-6.28	52.52	68.20	-15.68	peak
3	5700.000	61.26	-6.17	55.09	105.20	-50.11	peak
4	5720.000	66.79	-6.12	60.67	110.80	-50.13	peak
5	5725.000	70.24	-6.11	64.13	122.20	-58.07	peak
6	5779.200	104.56	-6.00	98.56	--	--	peak
7	5850.000	61.08	-5.84	55.24	122.20	-66.96	peak
8	5855.000	63.02	-5.83	57.19	110.80	-53.61	peak
9	5875.000	59.97	-5.78	54.19	105.20	-51.01	peak
10	5925.000	60.18	-5.68	54.50	68.20	-13.70	peak
11	6179.200	61.67	-4.90	56.77	68.20	-11.43	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5250 MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		

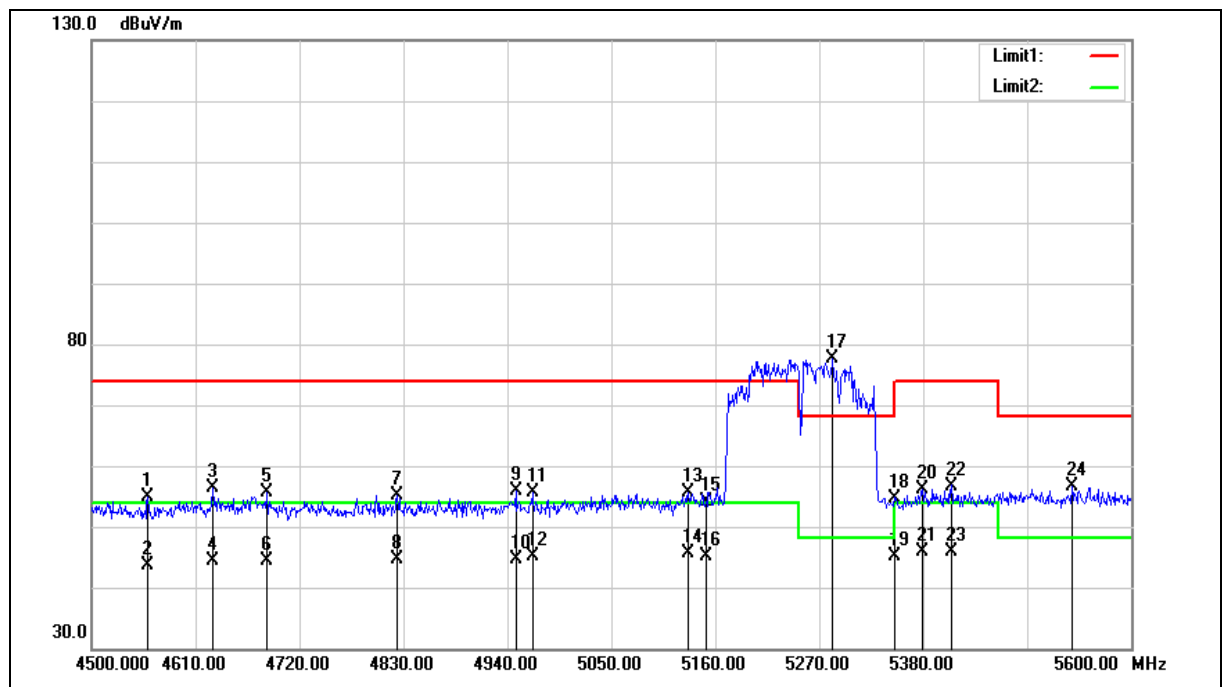

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5250 MHz		
Mode:	Mode 12		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4559.400	64.07	-9.30	54.77	74.00	-19.23	peak
2	4559.400	52.87	-9.30	43.57	54.00	-10.43	AVG
3	4628.700	65.58	-9.12	56.46	74.00	-17.54	peak
4	4628.700	53.51	-9.12	44.39	54.00	-9.61	AVG
5	4685.900	64.56	-8.97	55.59	74.00	-18.41	peak
6	4685.900	53.27	-8.97	44.30	54.00	-9.70	AVG
7	4823.400	63.79	-8.61	55.18	74.00	-18.82	peak
8	4823.400	53.34	-8.61	44.73	54.00	-9.27	AVG
9	4948.800	64.05	-8.28	55.77	74.00	-18.23	peak
10	4948.800	52.96	-8.28	44.68	54.00	-9.32	AVG
11	4966.400	63.78	-8.23	55.55	74.00	-18.45	peak
12	4966.400	53.25	-8.23	45.02	54.00	-8.98	AVG
13	5131.400	63.32	-7.74	55.58	74.00	-18.42	peak
14	5131.400	53.46	-7.74	45.72	54.00	-8.28	AVG
15	5150.000	61.81	-7.69	54.12	74.00	-19.88	peak
16	5150.000	52.72	-7.69	45.03	54.00	-8.97	AVG
17	5284.300	84.87	-7.28	77.59	---	---	peak
18	5350.000	61.74	-7.07	54.67	74.00	-19.33	peak
19	5350.000	52.15	-7.07	45.08	54.00	-8.92	AVG
20	5378.900	63.07	-6.98	56.09	74.00	-17.91	peak
21	5378.900	52.76	-6.98	45.78	54.00	-8.22	AVG
22	5409.700	63.64	-6.89	56.75	74.00	-17.25	peak
23	5409.700	52.72	-6.89	45.83	54.00	-8.17	AVG
24	5537.300	63.14	-6.52	56.62	68.20	-11.58	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5250 MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		

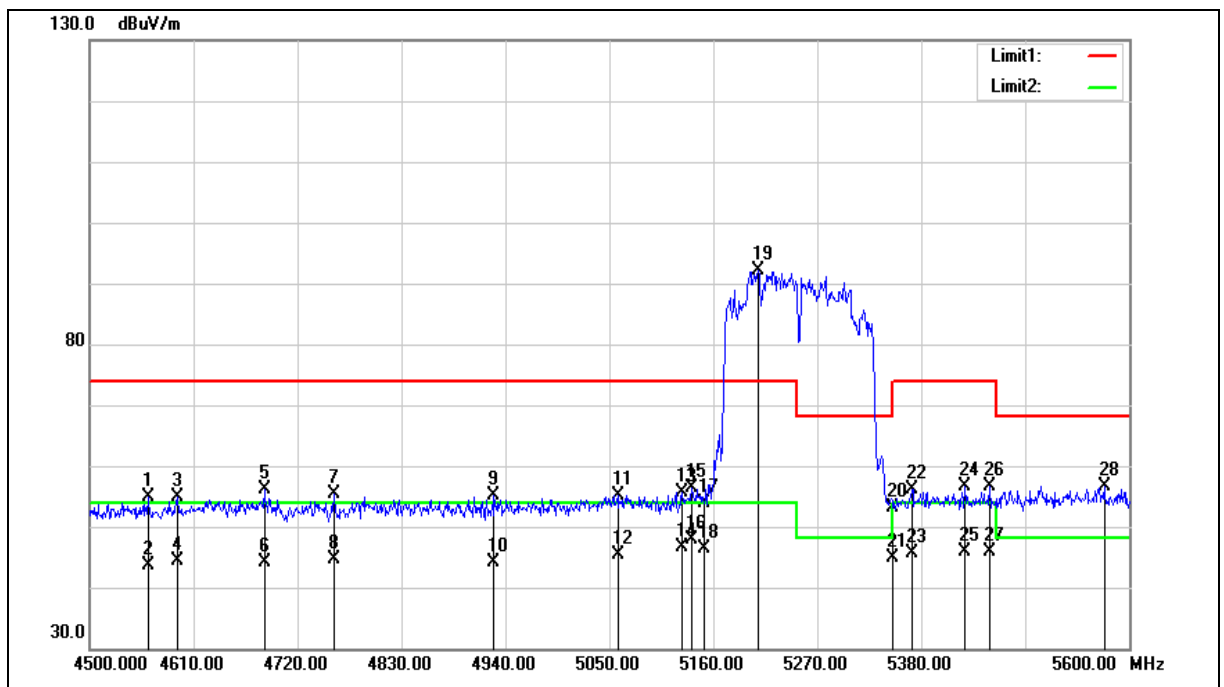

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5250 MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4561.600	64.09	-9.29	54.80	74.00	-19.20	peak
2	4561.600	52.94	-9.29	43.65	54.00	-10.35	AVG
3	4593.500	64.02	-9.20	54.82	74.00	-19.18	peak
4	4593.500	53.69	-9.20	44.49	54.00	-9.51	AVG
5	4684.800	65.16	-8.97	56.19	74.00	-17.81	peak
6	4684.800	53.21	-8.97	44.24	54.00	-9.76	AVG
7	4758.500	64.07	-8.78	55.29	74.00	-18.71	peak
8	4758.500	53.34	-8.78	44.56	54.00	-9.44	AVG
9	4927.900	63.47	-8.34	55.13	74.00	-18.87	peak
10	4927.900	52.43	-8.34	44.09	54.00	-9.91	AVG
11	5058.800	63.15	-7.96	55.19	74.00	-18.81	peak
12	5058.800	53.23	-7.96	45.27	54.00	-8.73	AVG
13	5127.000	63.38	-7.75	55.63	74.00	-18.37	peak
14	5127.000	54.46	-7.75	46.71	54.00	-7.29	AVG
15	5136.900	64.20	-7.72	56.48	74.00	-17.52	peak
16	5136.900	55.48	-7.72	47.76	54.00	-6.24	AVG
17	5150.000	61.64	-7.69	53.95	74.00	-20.05	peak
18	5150.000	54.07	-7.69	46.38	54.00	-7.62	AVG
19	5207.300	99.74	-7.51	92.23	--	--	peak
20	5350.000	60.22	-7.07	53.15	74.00	-20.85	peak
21	5350.000	51.88	-7.07	44.81	54.00	-9.19	AVG
22	5370.100	63.14	-7.01	56.13	74.00	-17.87	peak
23	5370.100	52.74	-7.01	45.73	54.00	-8.27	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5250 MHz		
Mode:	Mode 12		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
24	5426.200	63.57	-6.83	56.74	74.00	-17.26	peak
25	5426.200	52.72	-6.83	45.89	54.00	-8.11	AVG
26	5452.600	63.47	-6.76	56.71	74.00	-17.29	peak
27	5452.600	52.69	-6.76	45.93	54.00	-8.07	AVG
28	5573.600	63.06	-6.45	56.61	68.20	-11.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

With Display

其它不必要之訊號 (1 GHz 以下)

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

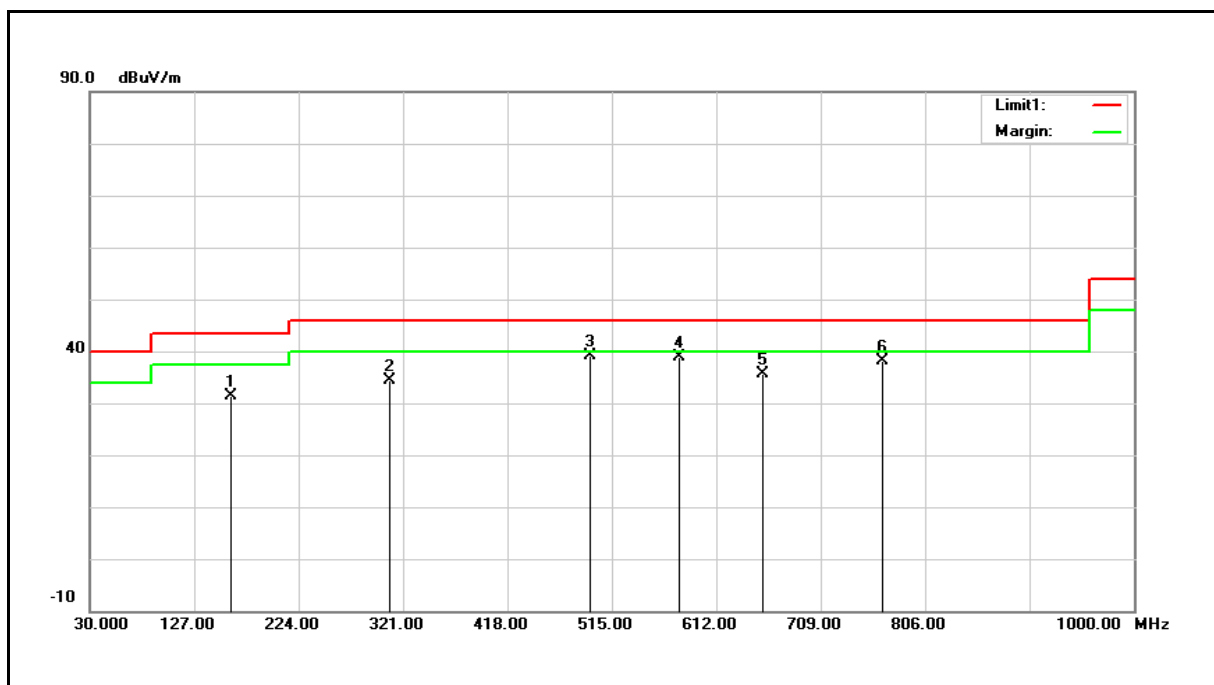

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	160.9500	36.79	-5.46	31.33	43.50	-12.17	QP
2	308.3900	38.43	-4.07	34.36	46.00	-11.64	QP
3	494.6300	39.41	-0.20	39.21	46.00	-6.79	QP
4	578.0500	37.06	1.86	38.92	46.00	-7.08	QP
5	655.6500	32.59	3.03	35.62	46.00	-10.38	QP
6	766.2300	32.84	5.41	38.25	46.00	-7.75	QP

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

Example: $31.33 = -5.46 + 36.79$

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

晶復科技股份有限公司


A Test Lab Techno Corp.

Report Number: 2008DR17

Rev.01

Date of Issue: Aug. 18, 2020

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

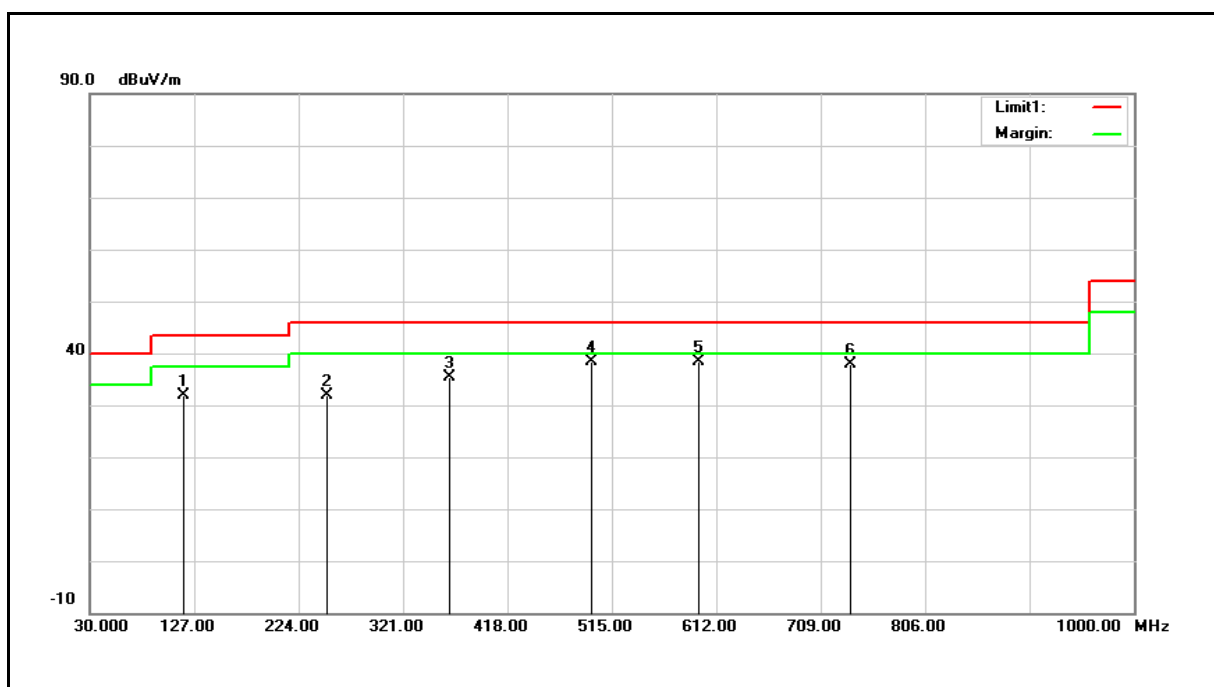

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	117.3000	40.49	-8.66	31.83	43.50	-11.67	QP
2	250.1900	37.99	-6.00	31.99	46.00	-14.01	QP
3	364.6500	38.44	-3.02	35.42	46.00	-10.58	QP
4	496.5700	38.65	-0.18	38.47	46.00	-7.53	QP
5	595.5100	36.01	2.35	38.36	46.00	-7.64	QP
6	737.1300	32.90	4.87	37.77	46.00	-8.23	QP

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).


Example: $31.83 = -8.66 + 40.49$

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

場強輻射量側 (1 GHz 以上)

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

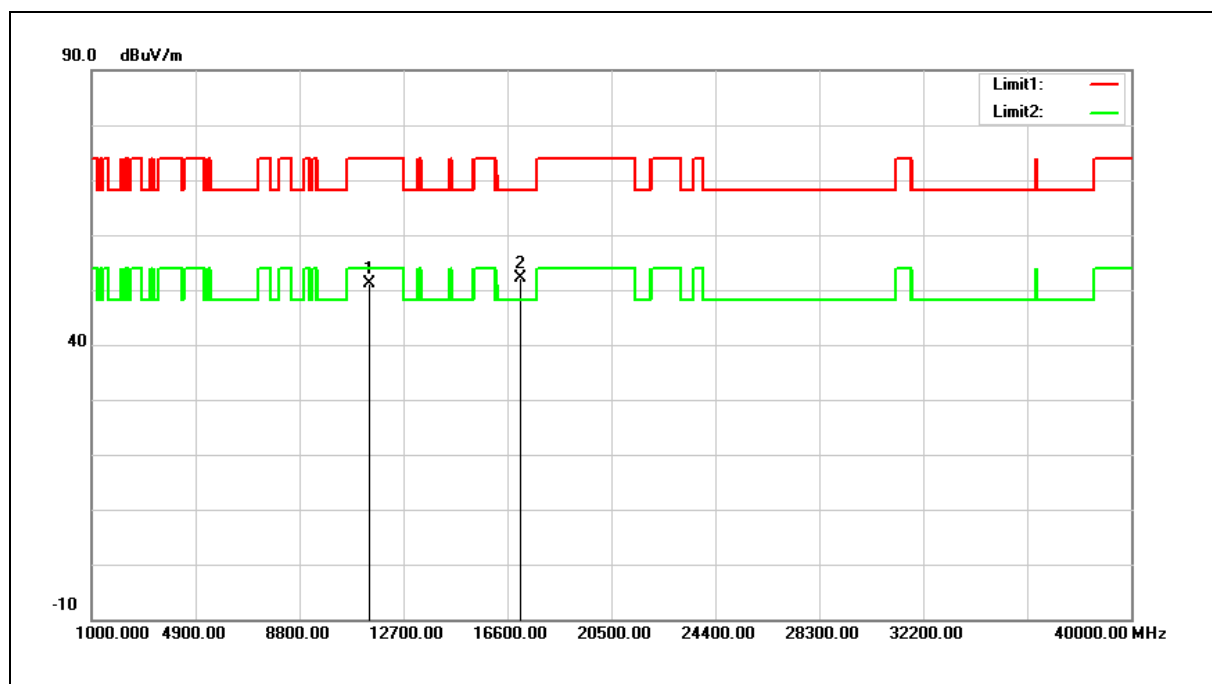

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	45.38	5.63	51.01	74.00	-22.99	peak
2	17100.000	41.81	10.27	52.08	68.20	-16.12	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 51.01 = 5.63 + 45.38

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

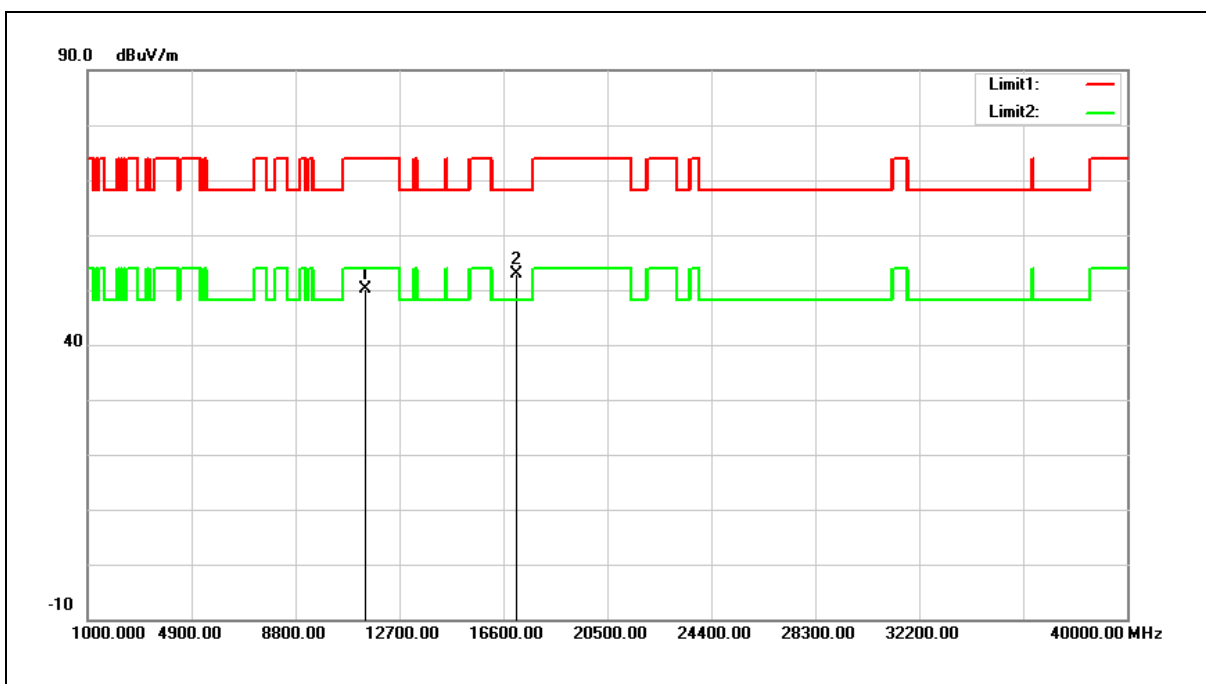

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	44.62	5.63	50.25	74.00	-23.75	peak
2	17100.000	42.61	10.27	52.88	68.20	-15.32	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 50.25 = 5.63 + 44.62


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

頻帶邊緣

附註：其上下邊緣落於低功率射頻電機第 2.7 節所列頻帶內之混附發射，其電場強度必須符合第 2.8 節的限制規定。

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		

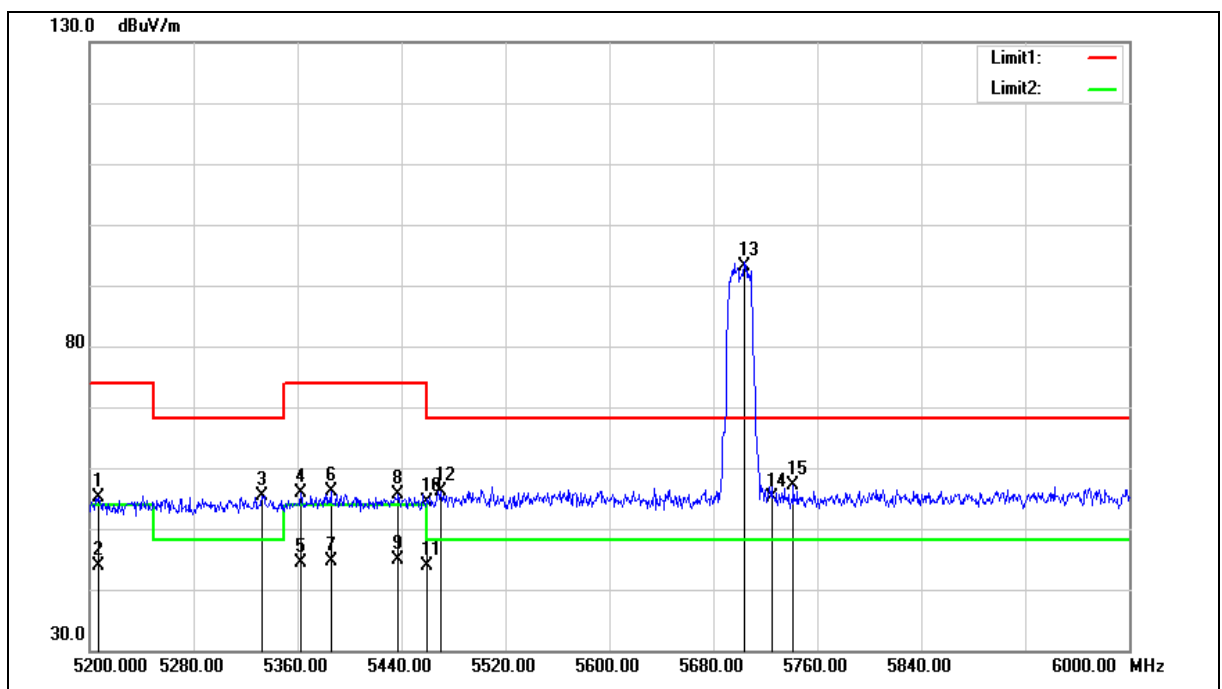

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5206.400	62.52	-7.51	55.01	74.00	-18.99	peak
2	5206.400	51.49	-7.51	43.98	54.00	-10.02	AVG
3	5332.800	62.50	-7.13	55.37	68.20	-12.83	peak
4	5362.400	62.95	-7.04	55.91	74.00	-18.09	peak
5	5362.400	51.46	-7.04	44.42	54.00	-9.58	AVG
6	5385.600	62.98	-6.96	56.02	74.00	-17.98	peak
7	5385.600	51.60	-6.96	44.64	54.00	-9.36	AVG
8	5437.600	62.38	-6.80	55.58	74.00	-18.42	peak
9	5437.600	51.69	-6.80	44.89	54.00	-9.11	AVG
10	5460.000	61.07	-6.73	54.34	74.00	-19.66	peak
11	5460.000	50.53	-6.73	43.80	54.00	-10.20	AVG
12	5470.000	62.74	-6.70	56.04	68.20	-12.16	peak
13	5704.000	99.26	-6.17	93.09	--	--	peak
14	5725.000	61.24	-6.11	55.13	68.20	-13.07	peak
15	5741.600	63.28	-6.08	57.20	68.20	-11.00	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

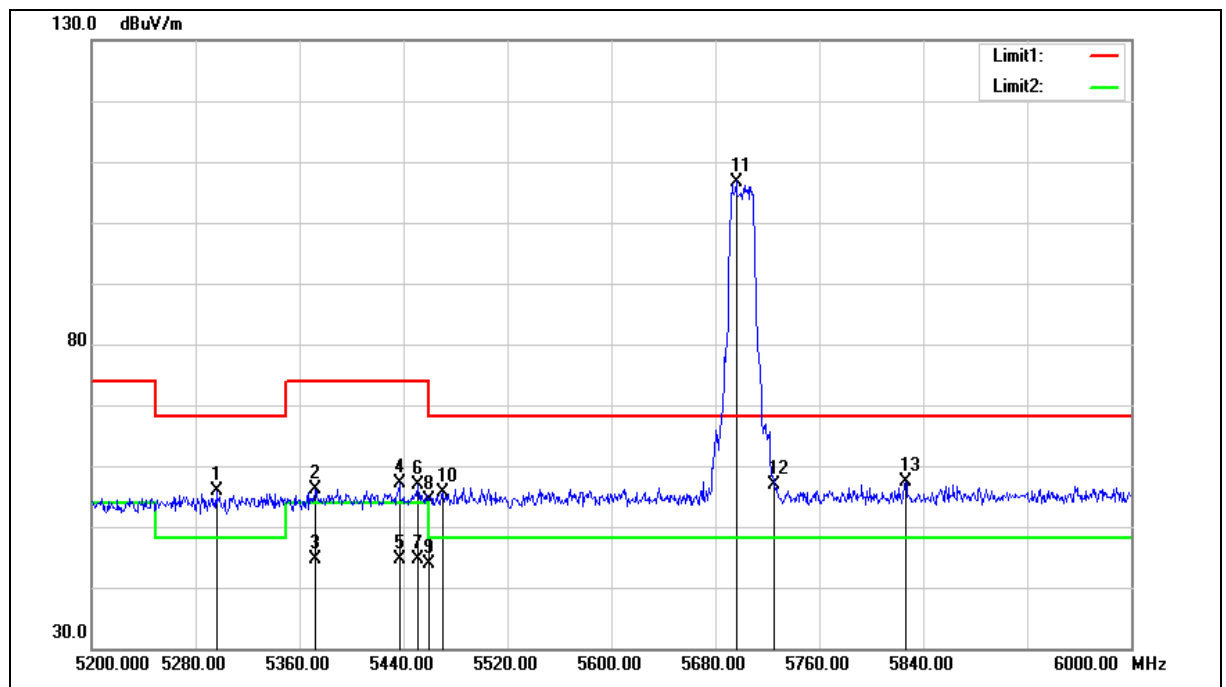

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 9		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5296.000	63.05	-7.24	55.81	68.20	-12.39	peak
2	5372.000	63.20	-7.01	56.19	74.00	-17.81	peak
3	5372.000	51.52	-7.01	44.51	54.00	-9.49	AVG
4	5436.800	63.89	-6.80	57.09	74.00	-16.91	peak
5	5436.800	51.40	-6.80	44.60	54.00	-9.40	AVG
6	5451.200	63.55	-6.76	56.79	74.00	-17.21	peak
7	5451.200	51.44	-6.76	44.68	54.00	-9.32	AVG
8	5460.000	61.22	-6.73	54.49	74.00	-19.51	peak
9	5460.000	50.70	-6.73	43.97	54.00	-10.03	AVG
10	5470.000	62.25	-6.70	55.55	68.20	-12.65	peak
11	5696.000	112.69	-6.18	106.51	--	--	peak
12	5725.000	63.11	-6.11	57.00	68.20	-11.20	peak
13	5826.400	63.23	-5.89	57.34	68.20	-10.86	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

4.3.2 最大傳導輸出功率之量測

合格標準:

依據 NCC 低功率射頻電機技術規範(LP0002)之 4.7.3 節之要求:

1. 5.15-5.25 GHz 頻帶

(1) 供戶外操作使用:

- 最大傳導輸出功率不能超過 1 W。
- 在任何 1MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
- 在水平面仰角超過 30 度時，其最大 EIRP 不能超過 21dBm。

(2) 供室內操作使用:

- 最大傳導輸出功率不能超過 1 W。
- 在任何 1MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

(3) 供固定式點對點操作使用:

- 最大傳導輸出功率不能超過 1 W。
- 在任何 1MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 23dBi 方向增益之指向性天線時，應依超過 23dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
- 固定式點對點操作，不包括點對多點系統、全方向性應用及多台共站發射機傳送相同資訊。

(4) 供行動或可攜式裝置操作使用:

- 最大傳導輸出功率不能超過 250 mW。
- 在任何 1MHz 頻帶中最大功率頻譜密度不能超過 11dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

2. 5.25-5.35 GHz 與 5.470-5.725 GHz 頻帶

- (1) 最大傳導輸出功率不能超過 250 mW 或 $11 \text{ dBm} + 10 \log B$ (B 是 26 dB 發射頻寬，單位 MHz)之較小者。
- (2) 最大功率頻譜密度在任何 1 MHz 頻帶中不能超過 11 dBm。
- (3) 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

3. 5.725-5.850 GHz 頻帶

- (1) 最大傳導輸出功率不能超過 1 W。
- (2) 在任何 500 kHz 頻帶中最大功率頻譜密度不能超過 30 dBm。
- (3) 供固定式點對點操作時，使用方向增益超過 6 dBi 之發射天線，可不需對應減少發射器之傳導輸出功率限制值。
- (4) 除(3)外，使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

4. 最大傳導輸出功率必須使用依據均方根等效電壓校準之儀器量測於任何連續傳輸之時段，量測結果須依儀器限制（如偵測器反應時間、相較於發射頻寬有限之解析頻寬能力，靈敏度等）調整得出正確之峰值量測，以符合本段落所提之發射定義。


CDD mode：

$$* \text{ Directional Gain} = G_{\text{ANT}} = 10 \cdot \log\{[10^{(G1/10)} + 10^{(G2/10)} + \dots + 10^{(Gn/10)}] / N_{\text{ANT}}\} = 2.50 \text{ dBi} < 6 \text{ dBi}$$

MIMO mode：

$$* \text{ Directional Gain} = 10 \cdot \log\{[10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(Gn/20)}]^2 / N_{\text{ANT}}\} = 5.51 \text{ dBi} < 6 \text{ dBi}$$

測試架構圖：

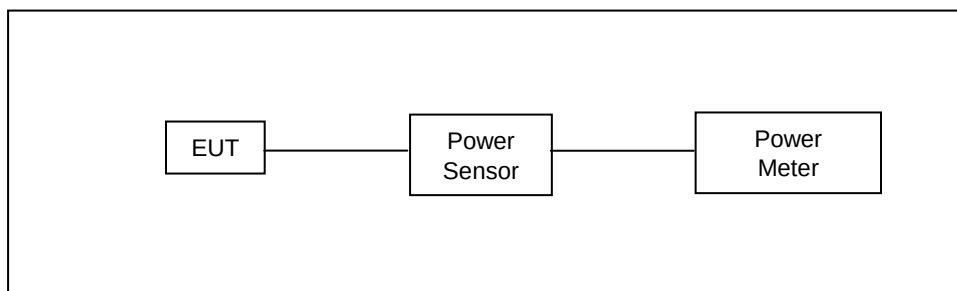

測試結果:

操作模式 : Mode 6 / Mode 7 / Mode 8 / Mode 9 / Mode 10 / Mode 11 / Mode 12								
操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)				
				ANT-0		ANT-1		Limit (dBm)
				dBm	W	dBm	W	
Mode 6	6	36	5180.0	10.08	0.010	9.34	0.009	≤ 24.00
		40	5200.0	9.92	0.010	9.55	0.009	≤ 24.00
		44	5220.0	9.90	0.010	9.53	0.009	≤ 24.00
		48	5240.0	10.04	0.010	9.52	0.009	≤ 24.00
		52	5260.0	9.94	0.010	9.15	0.008	≤ 24.00
		56	5280.0	9.85	0.010	9.12	0.008	≤ 24.00
		60	5300.0	9.74	0.009	9.10	0.008	≤ 24.00
		64	5320.0	9.59	0.009	9.11	0.008	≤ 24.00
		100	5500.0	8.31	0.007	8.55	0.007	≤ 23.30
		104	5520.0	8.44	0.007	8.81	0.008	≤ 23.30
		108	5540.0	8.58	0.007	8.99	0.008	≤ 23.30
		112	5560.0	8.65	0.007	9.07	0.008	≤ 23.30
		116	5580.0	8.61	0.007	9.04	0.008	≤ 23.30
		132	5660.0	8.59	0.007	9.01	0.008	≤ 23.30
		136	5680.0	8.60	0.007	9.05	0.008	≤ 23.30
		140	5700.0	8.68	0.007	9.04	0.008	≤ 23.30
		149	5745.0	9.37	0.009	8.82	0.008	≤ 30.00
		153	5765.0	9.25	0.008	8.72	0.007	≤ 30.00
		157	5785.0	9.28	0.008	8.76	0.008	≤ 30.00
		161	5805.0	9.20	0.008	8.70	0.007	≤ 30.00
		165	5825.0	9.16	0.008	8.84	0.008	≤ 30.00

操作模式 : Mode 6 / Mode 7 / Mode 8 / Mode 9 / Mode 10 / Mode 11 / Mode 12								
操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)				
				ANT-0		ANT-1		Limit (dBm)
				dBm	W	dBm	W	
Mode 7	14.4	36	5180.0	10.09	0.010	9.24	0.008	≤ 24.00
		40	5200.0	9.72	0.009	9.28	0.008	≤ 24.00
		44	5220.0	9.53	0.009	9.43	0.009	≤ 24.00
		48	5240.0	10.04	0.010	9.47	0.009	≤ 24.00
		52	5260.0	9.80	0.010	9.07	0.008	≤ 24.00
		56	5280.0	9.56	0.009	9.07	0.008	≤ 24.00
		60	5300.0	9.41	0.009	9.03	0.008	≤ 24.00
		64	5320.0	9.27	0.008	8.85	0.008	≤ 24.00
		100	5500.0	7.94	0.006	8.58	0.007	≤ 24.00
		104	5520.0	8.23	0.007	8.58	0.007	≤ 24.00
		108	5540.0	8.27	0.007	8.90	0.008	≤ 24.00
		112	5560.0	8.39	0.007	8.86	0.008	≤ 24.00
		116	5580.0	8.34	0.007	9.06	0.008	≤ 24.00
		132	5660.0	8.39	0.007	9.04	0.008	≤ 24.00
		136	5680.0	8.31	0.007	9.07	0.008	≤ 24.00
		140	5700.0	8.32	0.007	9.26	0.008	≤ 24.00
		149	5745.0	9.13	0.008	8.78	0.008	≤ 30.00
		153	5765.0	9.06	0.008	8.70	0.007	≤ 30.00
		157	5785.0	9.19	0.008	8.62	0.007	≤ 30.00
		161	5805.0	8.99	0.008	8.45	0.007	≤ 30.00
		165	5825.0	8.84	0.008	8.45	0.007	≤ 30.00
Mode 8	30	38	5190.0	7.98	0.006	7.53	0.006	≤ 24.00
		46	5230.0	9.93	0.010	9.57	0.009	≤ 24.00
		54	5270.0	9.71	0.009	8.92	0.008	≤ 24.00
		62	5310.0	9.31	0.009	8.86	0.008	≤ 24.00
		102	5510.0	8.48	0.007	8.70	0.007	≤ 24.00
		110	5550.0	8.13	0.007	8.85	0.008	≤ 24.00
		134	5670.0	8.70	0.007	9.23	0.008	≤ 24.00
		151	5755.0	8.99	0.008	8.72	0.007	≤ 30.00
		159	5795.0	8.94	0.008	8.81	0.008	≤ 30.00

操作模式 : Mode 6 / Mode 7 / Mode 8 / Mode 9 / Mode 10 / Mode 11 / Mode 12								
操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)				
				ANT-0		ANT-1		Limit (dBm)
				dBm	W	dBm	W	
Mode 9	MCS0	36	5180.0	10.23	0.011	9.42	0.009	≤ 24.00
		40	5200.0	9.86	0.010	9.58	0.009	≤ 24.00
		44	5220.0	9.79	0.010	9.55	0.009	≤ 24.00
		48	5240.0	10.14	0.010	9.56	0.009	≤ 24.00
		52	5260.0	9.82	0.010	9.30	0.009	≤ 24.00
		56	5280.0	9.76	0.009	9.22	0.008	≤ 24.00
		60	5300.0	9.60	0.009	9.15	0.008	≤ 24.00
		64	5320.0	9.49	0.009	9.10	0.008	≤ 24.00
		100	5500.0	8.23	0.007	8.61	0.007	≤ 24.00
		104	5520.0	8.35	0.007	8.78	0.008	≤ 24.00
		108	5540.0	8.48	0.007	8.98	0.008	≤ 24.00
		112	5560.0	8.53	0.007	9.16	0.008	≤ 24.00
		116	5580.0	8.51	0.007	9.12	0.008	≤ 24.00
		132	5660.0	8.45	0.007	9.15	0.008	≤ 24.00
		136	5680.0	8.52	0.007	9.10	0.008	≤ 24.00
		140	5700.0	8.60	0.007	9.43	0.009	≤ 24.00
		149	5745.0	9.26	0.008	8.82	0.008	≤ 30.00
		153	5765.0	9.25	0.008	8.75	0.007	≤ 30.00
		157	5785.0	9.28	0.008	8.77	0.008	≤ 30.00
		161	5805.0	9.20	0.008	8.71	0.007	≤ 30.00
		165	5825.0	9.12	0.008	8.69	0.007	≤ 30.00
Mode 10	MCS0	38	5190.0	8.16	0.007	7.85	0.006	≤ 24.00
		46	5230.0	9.98	0.010	9.58	0.009	≤ 24.00
		54	5270.0	9.90	0.010	9.21	0.008	≤ 24.00
		62	5310.0	9.48	0.009	9.17	0.008	≤ 24.00
		102	5510.0	8.41	0.007	8.89	0.008	≤ 24.00
		110	5550.0	8.39	0.007	8.98	0.008	≤ 24.00
		134	5670.0	8.78	0.008	9.48	0.009	≤ 24.00
		151	5755.0	9.25	0.008	8.93	0.008	≤ 30.00
		159	5795.0	9.16	0.008	8.82	0.008	≤ 30.00
Mode 11	MCS0	42	5210.0	4.58	0.003	4.52	0.003	≤ 24.00
		58	5290.0	7.20	0.005	6.94	0.005	≤ 24.00
		106	5530.0	8.24	0.007	8.79	0.008	≤ 24.00
		155	5775.0	9.08	0.008	8.75	0.007	≤ 30.00
Mode 12	MCS0	50	5250.0	-0.11	0.001	-1.07	0.001	≤ 24.00
		50	5250.0	-0.28	0.001	0.43	0.001	≤ 24.00

操作模式 : Mode 6 / Mode 7 / Mode 8 / Mode 9 / Mode 10 / Mode 11 / Mode 12						
操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)		
				ANT-0+1		Limit (dBm)
				dBm	W	
Mode 6	6	36	5180.0	12.74	0.019	≤ 24.00
		40	5200.0	12.75	0.019	≤ 24.00
		44	5220.0	12.73	0.019	≤ 24.00
		48	5240.0	12.80	0.019	≤ 24.00
		52	5260.0	12.57	0.018	≤ 24.00
		56	5280.0	12.51	0.018	≤ 24.00
		60	5300.0	12.44	0.018	≤ 24.00
		64	5320.0	12.37	0.017	≤ 24.00
		100	5500.0	11.44	0.014	≤ 23.30
		104	5520.0	11.64	0.015	≤ 23.30
		108	5540.0	11.80	0.015	≤ 23.30
		112	5560.0	11.88	0.015	≤ 23.30
		116	5580.0	11.84	0.015	≤ 23.30
		132	5660.0	11.81	0.015	≤ 23.30
		136	5680.0	11.84	0.015	≤ 23.30
		140	5700.0	11.87	0.015	≤ 23.30
		149	5745.0	12.11	0.016	≤ 30.00
		153	5765.0	12.00	0.016	≤ 30.00
		157	5785.0	12.04	0.016	≤ 30.00
		161	5805.0	11.97	0.016	≤ 30.00
		165	5825.0	12.01	0.016	≤ 30.00

操作模式 : Mode 6 / Mode 7 / Mode 8 / Mode 9 / Mode 10 / Mode 11 / Mode 12						
操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)		
				ANT-0+1		Limit (dBm)
				dBm	W	
Mode 7	14.4	36	5180.0	12.70	0.019	≤ 24.00
		40	5200.0	12.52	0.018	≤ 24.00
		44	5220.0	12.49	0.018	≤ 24.00
		48	5240.0	12.77	0.019	≤ 24.00
		52	5260.0	12.46	0.018	≤ 24.00
		56	5280.0	12.33	0.017	≤ 24.00
		60	5300.0	12.23	0.017	≤ 24.00
		64	5320.0	12.08	0.016	≤ 24.00
		100	5500.0	11.28	0.013	≤ 24.00
		104	5520.0	11.42	0.014	≤ 24.00
		108	5540.0	11.61	0.014	≤ 24.00
		112	5560.0	11.64	0.015	≤ 24.00
		116	5580.0	11.73	0.015	≤ 24.00
		132	5660.0	11.74	0.015	≤ 24.00
		136	5680.0	11.72	0.015	≤ 24.00
		140	5700.0	11.83	0.015	≤ 24.00
		149	5745.0	11.97	0.016	≤ 30.00
		153	5765.0	11.89	0.015	≤ 30.00
		157	5785.0	11.92	0.016	≤ 30.00
		161	5805.0	11.74	0.015	≤ 30.00
		165	5825.0	11.66	0.015	≤ 30.00
Mode 8	30	38	5190.0	10.77	0.012	≤ 24.00
		46	5230.0	12.76	0.019	≤ 24.00
		54	5270.0	12.34	0.017	≤ 24.00
		62	5310.0	12.10	0.016	≤ 24.00
		102	5510.0	11.60	0.014	≤ 24.00
		110	5550.0	11.52	0.014	≤ 24.00
		134	5670.0	11.98	0.016	≤ 24.00
		151	5755.0	11.87	0.015	≤ 30.00
		159	5795.0	11.89	0.015	≤ 30.00

操作模式 : Mode 6 / Mode 7 / Mode 8 / Mode 9 / Mode 10 / Mode 11 / Mode 12						
操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)		
				ANT-0+1		Limit (dBm)
				dBm	W	
Mode 9	MCS0	36	5180.0	12.85	0.019	≤ 24.00
		40	5200.0	12.73	0.019	≤ 24.00
		44	5220.0	12.68	0.019	≤ 24.00
		48	5240.0	12.87	0.019	≤ 24.00
		52	5260.0	12.58	0.018	≤ 24.00
		56	5280.0	12.51	0.018	≤ 24.00
		60	5300.0	12.39	0.017	≤ 24.00
		64	5320.0	12.31	0.017	≤ 24.00
		100	5500.0	11.43	0.014	≤ 24.00
		104	5520.0	11.58	0.014	≤ 24.00
		108	5540.0	11.75	0.015	≤ 24.00
		112	5560.0	11.87	0.015	≤ 24.00
		116	5580.0	11.84	0.015	≤ 24.00
		132	5660.0	11.82	0.015	≤ 24.00
		136	5680.0	11.83	0.015	≤ 24.00
		140	5700.0	12.05	0.016	≤ 24.00
		149	5745.0	12.06	0.016	≤ 30.00
		153	5765.0	12.02	0.016	≤ 30.00
		157	5785.0	12.04	0.016	≤ 30.00
		161	5805.0	11.97	0.016	≤ 30.00
		165	5825.0	11.92	0.016	≤ 30.00
Mode 10	MCS0	38	5190.0	11.02	0.013	≤ 24.00
		46	5230.0	12.79	0.019	≤ 24.00
		54	5270.0	12.58	0.018	≤ 24.00
		62	5310.0	12.34	0.017	≤ 24.00
		102	5510.0	11.67	0.015	≤ 24.00
		110	5550.0	11.71	0.015	≤ 24.00
		134	5670.0	12.15	0.016	≤ 24.00
		151	5755.0	12.10	0.016	≤ 30.00
		159	5795.0	12.00	0.016	≤ 30.00
Mode 11	MCS0	42	5210.0	7.56	0.006	≤ 24.00
		58	5290.0	10.08	0.010	≤ 24.00
		106	5530.0	11.53	0.014	≤ 24.00
		155	5775.0	11.93	0.016	≤ 30.00
Mode 12	MCS0	50	5250.0	2.45	0.002	≤ 24.00
		50	5250.0	3.10	0.002	≤ 24.00

4.3.3 最大傳導功率頻譜密度之要求

合格標準:

依據 NCC 低功率射頻電機技術規範(LP0002)之 4.7.3 節之要求:

1. 5.15-5.25 GHz 頻帶

(1) 供戶外操作使用:

- 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
- 在水平面仰角超過 30 度時，其最大 EIRP 不能超過 21 dBm。

(2) 供室內操作使用:

- 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

(3) 供固定式點對點操作使用:

- 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 17 dBm。
- 使用超過 23 dBi 方向增益之指向性天線時，應依超過 23 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
- 固定式點對點操作，不包括點對多點系統、全方向性應用及多台共站發射機傳送相同資訊。

(4) 供行動或可攜式裝置操作使用:

- 在任何 1 MHz 頻帶中最大功率頻譜密度不能超過 11 dBm。
- 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

2. 5.25-5.35 GHz 與 5.470-5.725 GHz 頻帶

(1) 最大功率頻譜密度在任何 1 MHz 頻帶中不能超過 11 dBm。

(2) 使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

3. 5.725-5.850 GHz 頻帶

(1) 在任何 500 kHz 頻帶中最大功率頻譜密度不能超過 30 dBm。

(2) 供固定式點對點操作時，使用方向增益超過 6 dBi 之發射天線，可不需對應減少發射器之傳導輸出功率限制值。

(3) 除(2)外，使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

4. 最大功率頻譜密度量測規定:

(1) 應將量測儀器直接連接待測物，以傳導方式執行。

(2) 5.15 GHz~5.25 GHz、5.25 GHz~5.35 GHz 及 5.47 GHz~5.725 GHz 頻帶，量測儀器之頻寬應設定為 1 MHz 頻寬或待測物之 26 dB 發射頻寬，兩者取較小者。

(3) 5.725 GHz~5.850 GHz 頻帶，量測器之頻寬應設定為 500 kHz 或待測物之 26 dB 發射頻寬，兩者取較小者。

(4) 解析頻寬小於(2)或(3)時，應以補償方式計算總功率頻譜密度。

CDD/MIMO mode :

$$\text{Directional Gain} = 10 \cdot \log\{[10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(Gn/20)}]^2 / N_{\text{ANT}}\} = 5.51 \text{ dBi} < 6 \text{ dBi}$$

測試架構圖：

