

TEST REPORT

Report No.: BCTC2605236180E

Applicant: MAKER Co., Ltd.

Product Name: One Hand Shutter

Test Model: L-ASH01

Tested Date: 2026-05-27 to 2026-06-22

Issued Date: 2026-06-22




Shenzhen BCTC Testing Co., Ltd.



Product Name: One Hand Shutter
Trademark: N/A
Model/Type Reference: L-ASH01
L-ASH01-1, L-ASH01-2, L-ASH01-3, L-ASH01-4, L-ASH01-5, L-ASH01-6,
L-ASH01-7, L-ASH01-8, L-ASH01-9
Prepared For: MAKER Co., Ltd.
Address: 7-1-20 Nishinakajima Yodogawa-Ku Osaka-City Osaka-fu Japan
Manufacturer: MAKER Co., Ltd.
Address: 7-1-20 Nishinakajima Yodogawa-Ku Osaka-City Osaka-fu Japan
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road,
Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: 2026-05-27
Sample Tested Date: 2026-05-27 to 2026-06-22
Issue Date: 2026-06-22
Report No.: BCTC2605236180E
Test Standards: Article 2 paragraph 1 of item 19
MIC Notice No.88 Appendix No.43
Test Results: PASS
Remark: This is JAPAN RADIO test report.

Tested by:



Shanshan. Zhang / Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.


Table Of Content

Test Report Declaration	Page
1. Version	5
2. Test Summary	6
3. Measurement Uncertainty	7
4. Product Information And Test Setup	8
4.1 Product Information	8
4.2 Block Diagram Parameters Of Test Software Setting	9
4.3 Description Of Support Units (Conducted Mode)	9
4.4 Channel List	9
4.5 Test Mode	9
4.6 Test Conditions	10
4.7 Table Of Parameters Of Test Software Setting	10
5. Test Facility And Test Instrument Used	11
5.1 Test Facility	11
5.2 Test Instrument Used	11
6. RF Shielding Method	12
7. Frequency Error	13
7.1 Block Diagram Of Test Setup	13
7.2 Limit	13
7.3 Measuring Instruments And Setting	13
7.4 Test procedure	13
7.5 Test Result	14
8. Antenna Power	15
8.1 Block Diagram Of Test Setup	20
8.2 Limit	20
8.3 Test procedure	20
8.4 Test Result	21
9. Occupied Bandwidth	22
9.1 Block Diagram Of Test Setup	22
9.2 Limit	22
9.3 Test procedure	22
9.4 Test Result	23
10. Unwanted Emission Intensity Measurement	42
10.1 Block Diagram Of Test Setup	42
10.2 Limit	42
10.3 Measuring Instruments And Setting	42
10.4 Test procedure	42
10.5 Test Result	43
11. Imitation Of Collateral Emission Of Receiver Measurement	90
11.1 Block Diagram Of Test Setup	90
11.2 Limit	90
11.3 Measuring Instruments And Setting	90
11.4 Test procedure	90
11.5 Test Result	91
12. Transmission Antenna Gain (EIRP Antenna Power) Measurement	101
12.1 Block Diagram Of Test Setup	101
12.2 Limit	101

12.3	Measuring Instruments And Setting	102
12.4	Test procedure	102
12.5	Test Result	102
13.	Transmission Radiation Angle Width (3db Beamwidth) Measurement	103
13.1	Block Diagram Of Test Setup	103
13.2	Limit	103
13.3	Measuring Instruments And Setting	103
13.4	Test procedure	103
13.5	Test Result	103
14.	Radio Interference Prevention Capability Measurement	104
14.1	Block Diagram Of Test Setup	104
14.2	Limit	104
14.3	Measuring Instruments And Setting	104
14.4	Test procedure	104
14.5	Test Result	104
15.	EUT Photographs	105
16.	EUT Test Setup Photographs	106


(Note: N/A Means Not Applicable)

TE
TC
OVE
t Sea

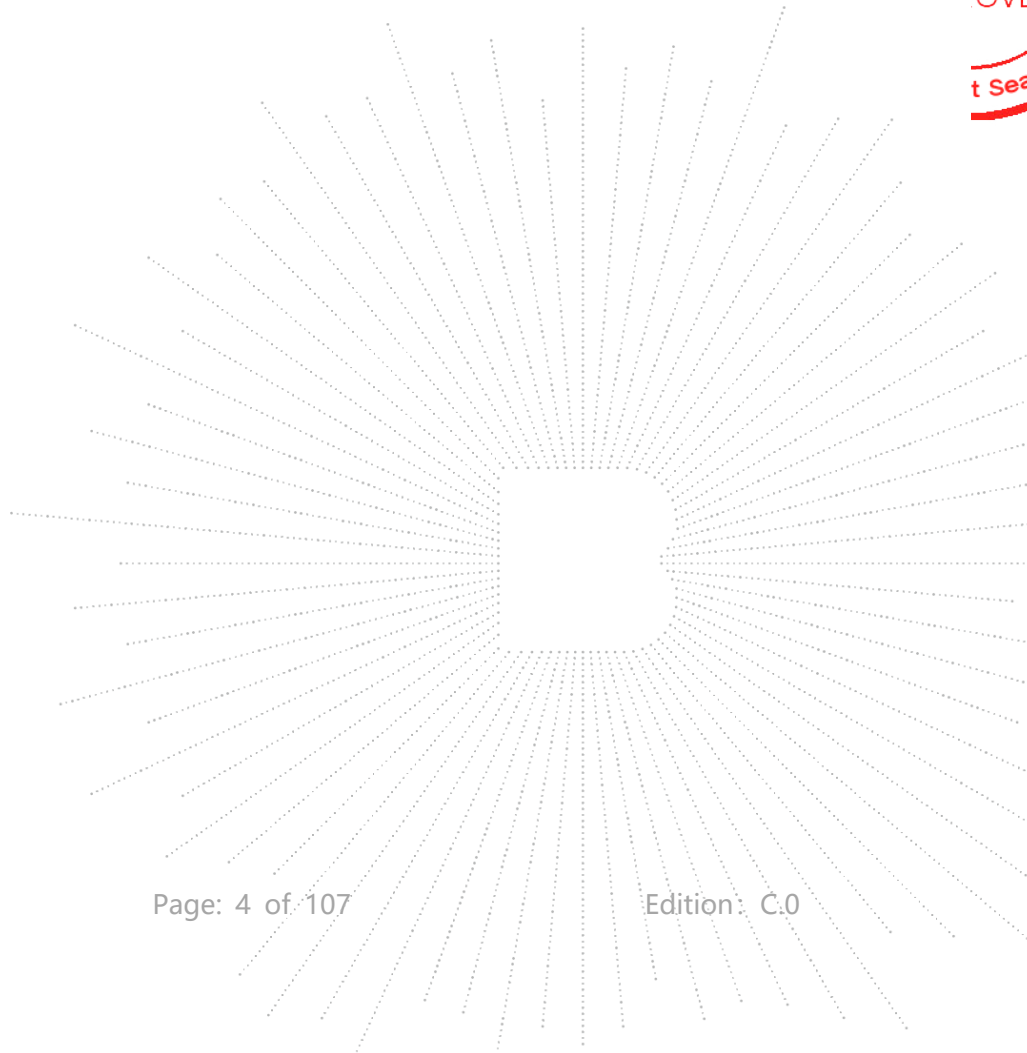

1. Version

Report No.	Issue Date	Description	Approved
BCTC2605236180E	2026-06-22	Original	Valid

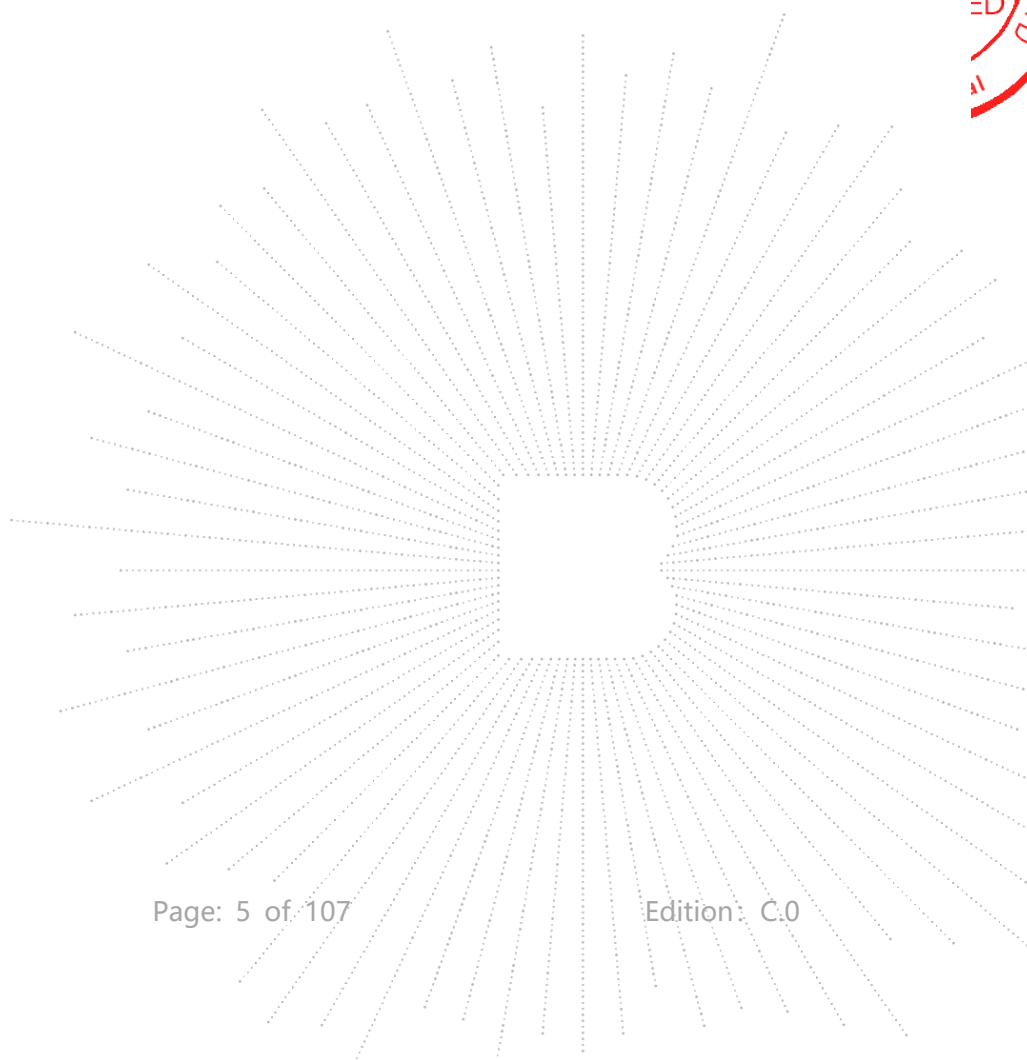

2. Test Summary


Test procedures according to the technical standards:

Article 2 paragraph 1 of item 19	
Description of Test	Result
Frequency Error	Complies
Occupied Bandwidth (99%) and Spread-spectrum Bandwidth (90%)	Complies
Unwanted Emission Intensity	Complies
Antenna Power Error	Complies
Limitation of Collateral Emission of Receiver	Complies
Transmission Antenna Gain (EIRP Antenna Power)	N/A
Transmission Radiation Angle Width (3dB Beamwidth)	N/A
Radio Interference Prevention Capability	Complies
Construction Protection Confirmation	Complies

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

CO., LTD.

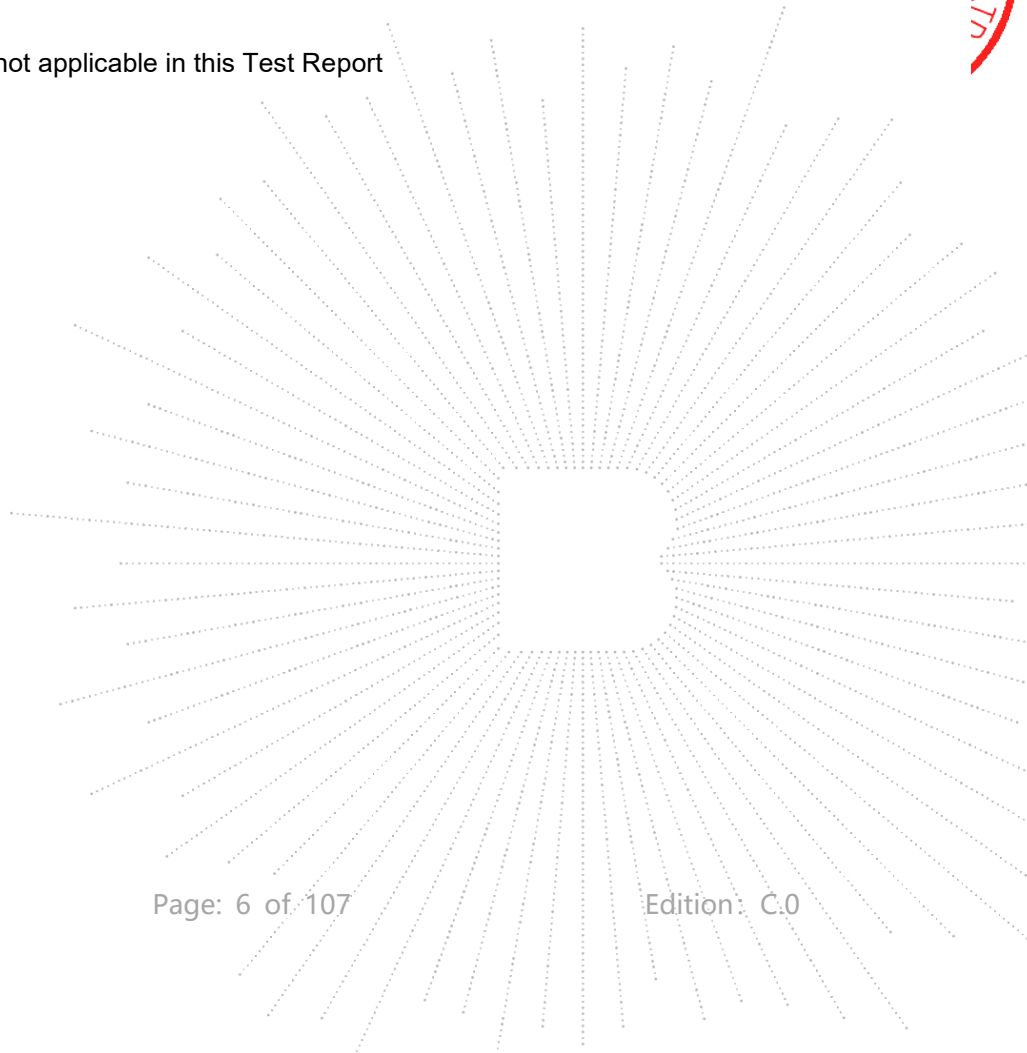

3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.2\text{dB}$
2	Radiated Emission Test	$\pm 4.7\text{dB}$
3	RF power,conducted	$\pm 0.16\text{dB}$
4	Spurious emissions,conducted	$\pm 0.21\text{dB}$
5	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
6	All emissions,radiated(>1G)	$\pm 5.0\text{dB}$
7	frequency error ppm	$\pm 0.5\text{ppm}$


4. Product Information And Test Setup

4.1 Product Information

Model/Type Reference:	L-ASH01 L-ASH01-1, L-ASH01-2, L-ASH01-3, L-ASH01-4, L-ASH01-5, L-ASH01-6, L-ASH01-7, L-ASH01-8, L-ASH01-9
Model Differences:	All the model are the same circuit and RF module, except model names and appearance of the color, the test model is L-ASH01.
Hardware Version:	2025-X003-2KEY-V1.0
Software Version:	SVN1281
Operation Frequency:	2402-2480MHz
Type of Modulation:	GFSK1Mbps, GFSK2Mbps
Number Of Channel:	40 CH
Antenna installation:	Internal antenna
Antenna Gain:	1.66 dBi Remark: ☒ The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information. The laboratory assumes no responsibility for its authenticity. ☐ The antenna gain of the product is provided by the customer, and the test data is affected by the customer information. The laboratory assumes no responsibility for its authenticity.
Ratings:	DC 3V



4.2 Block Diagram Parameters Of Text Software Setting

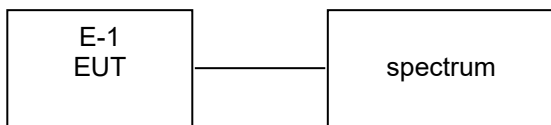

4.3 Description Of Support Units (Conducted Mode)

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	One Hand Shutter	N/A	L-ASH01	N/A	EUT

Notes:

1. The support equipment was authorized by Declaration of Confirmation.
2. For detachable type I/O cable should be specified the length in cm in 『Length』 column
3. “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

4.4 Channel List

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2402	11	2422	21	2442
02	2404	12	2424	22	2444
03	2406	13	2426	23	2446
~	~	~	~	~	~
09	2418	19	2438	39	2478
10	2420	20	2440	40	2480

4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For All Mode	Description	Modulation Type
Mode 1	CH01	GFSK(1Mbps)
Mode 2	CH20	
Mode 3	CH40	
Mode 4	CH01	GFSK(2Mbps)
Mode 5	CH20	
Mode 6	CH40	
Mode 7	RX	GFSK

4.6 Test Conditions

The EUT module was tested while in a continuous transmitter/receiver mode.

The EUT was tuned to a low, middle, and high channel for all tests. For all test case pre/scans were completed in all Modes to determine worst case levels.

Power Supply Voltage Fluctuation Test

Voltage Fluctuation Test	Normal Voltage	High Voltage +10% of Normal Voltage	Low Voltage -10% of Normal Voltage
Input DC Power	3V	3.3	2.7V
Voltage Variation (%)	0%	+10%	-10%

Note:

Voltage Variation (%)= (Output high or Low Voltage - Output Normal Voltage)/ Output Normal Voltage* 100.

4.7 Table Of Parameters Of Test Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	FCCTestTool V2.3		
Frequency	2402 MHz	2440 MHz	2480 MHz
Parameters	DEF	DEF	DEF

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1.	Power Meter	Keysight	E4419	A00065	May 09, 2026	May 08, 2027
2.	Power Sensor	Keysight	E9300A	US39211659	May 09, 2026	May 08, 2027
3.	Signal Analyzer 20Hz-26.5GHz	Keysight	N9020A	MY54230579	Oct. 31, 2025	Oct. 30, 2026
4.	D.C. Power Supply	LongWei	TPR-6405D	\	May 09, 2026	May 08, 2027
5.	Signal Generator	Keysight	N5182B	MY56200519	May 09, 2026	May 08, 2027
6.	Pulse limiter	Schwarzbeck	VTSD 9561-F	01323	May 09, 2026	May 08, 2027
7.	Hygrothermograph	Thermo	HTC-1	\	May 09, 2026	May 08, 2027
8.	Software	MTS	8310E	V3.0.0.0	\	\


Calibration laboratory: CCIC(Shenzhen) Co., Ltd

● Calibration Information (Article 24-2, Paragraph 4 of the Radio Act)	
☐	a) Calibration conducted by the National Institute of Information and Communications Technology (NICT) or a designated calibration agency under Article 102-18-1 of the Radio Act
☐	b) Calibration conducted based on the regulations of Article 135 or 144 of the Measurement Act
☒	c) Calibration conducted in foreign countries, which is equivalent to calibration conducted by the NICT or a designated calibration agency under Article 102-18-1 of the Radio Act
☐	d) Calibration, etc. conducted by using measuring instruments and other facilities listed at the bottom of appended table 3 of the Radio Act, which is to have been calibrated as described in (a) through (c) above

6. RF Shielding Method

Enclosure:


The product structure is stuck by glue and thread sewn together, it's shell will have to engineering plastic processing, If the shell will be open, so the product should be damage. See below the structure:

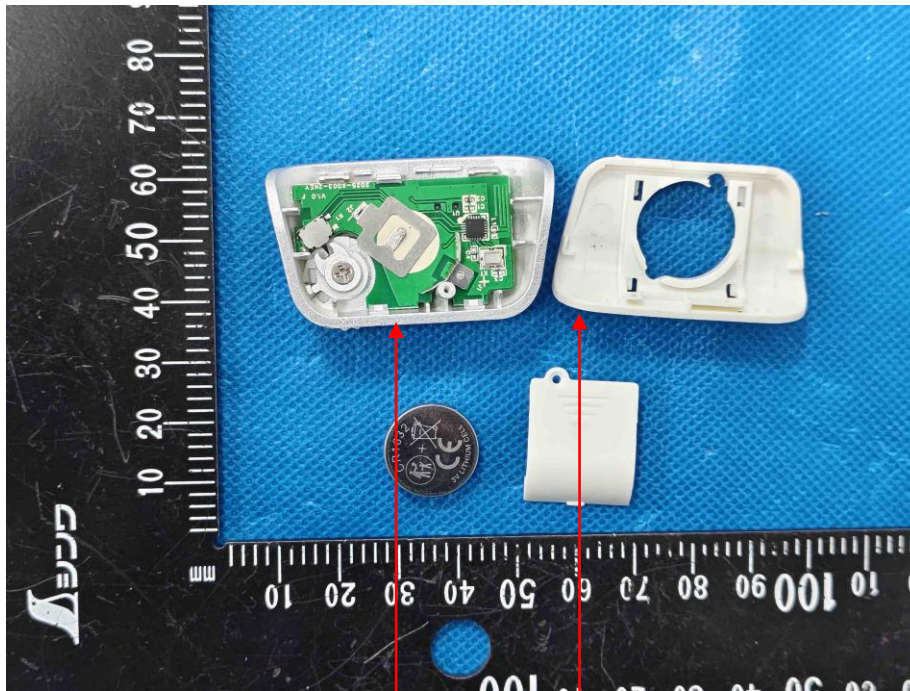

Special glue is used on red line
for cannot be open easily
structure

7. Frequency Error

7.1 Block Diagram Of Test Setup

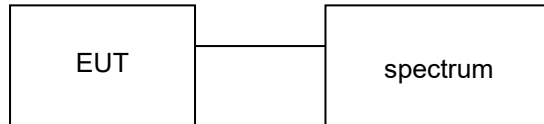

7.2 Limit

Item	Limits
Frequency Error	±50ppm

7.3 Measuring Instruments And Setting

The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
RB / VB	10KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


7.4 Test procedure



- (1) In the case of unmodulated signal (continuous or continuous burst), measure the frequency directly by a frequency meter.
 - (2) In the case of burst waves, the measurement shall be done for enough time in order to obtain the enough measuring accuracy, and the average of the measured values becomes the final value.
 - (3) In the case of a test mode with a specific frequency spectrum, measure the frequency of the specific spectrum by a spectrum analyzer.
 - (4) In the cases above, if the frequency equivalent to the test frequency is not directly measured in principle, it shall be obtained by necessary calculation.
- In the case of modulated signal, if there is no specific spectrum measurable by a spectrum analyzer but a specific dip is observed, it is allowed to measure the frequency with the signal generator (synthesized). That is, observe a signal of the signal generator concurrently (or alternately) with the tested signal using the spectrum analyzer while setting the frequency of the signal generator to the position of the dip on the screen of the spectrum analyzer, and determine the frequency of the signal generator at the time as a measured value.



7.5 Test Result



Temperature:	26°C		
Humidity:	54%RH	Test Voltage	DC 3.7V
Test Mode:	GFSK		

Condition	Frequency	Measured Frequency	Frequency Error	Limit	Verdict
NVNT	MHz	MHz	ppm	(ppm)	
	2402	2402	0	±50	Pass
	2440	2440	0	±50	Pass
	2480	2480	0	±50	Pass
LVNT	2402	2401.999	-0.42	±50	Pass
	2440	2439.998	-0.82	±50	Pass
	2480	2479.998	-0.81	±50	Pass
HVNT	2402	2401.999	-0.42	±50	Pass
	2440	2439.998	-0.82	±50	Pass
	2480	2479.998	-0.81	±50	Pass

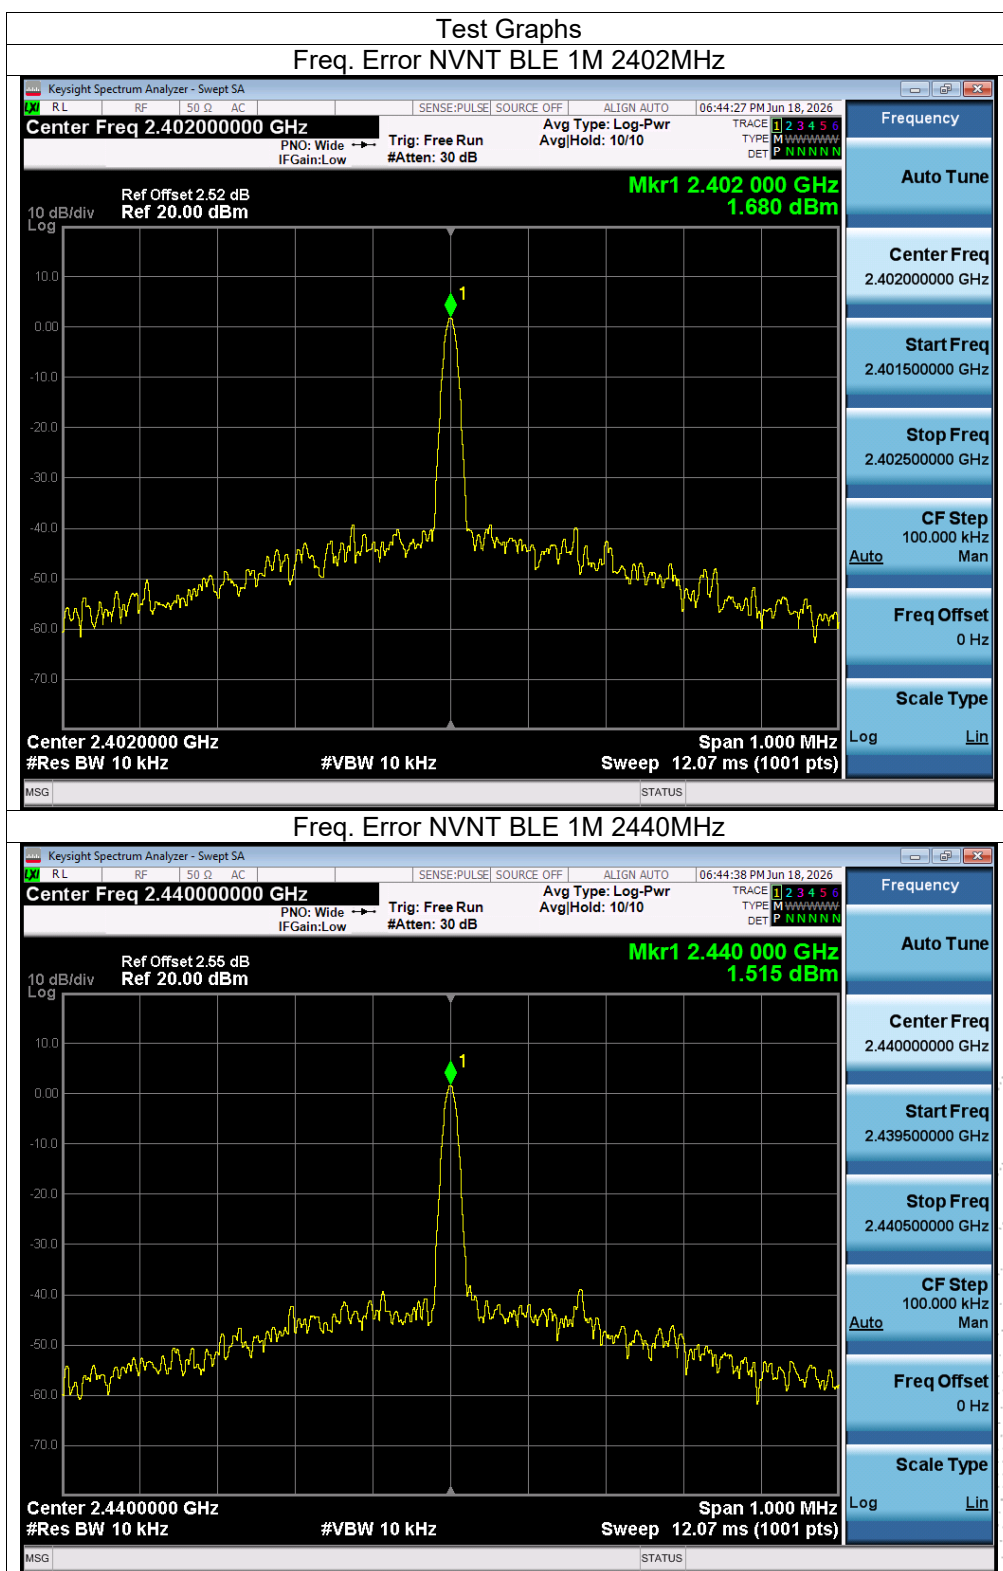


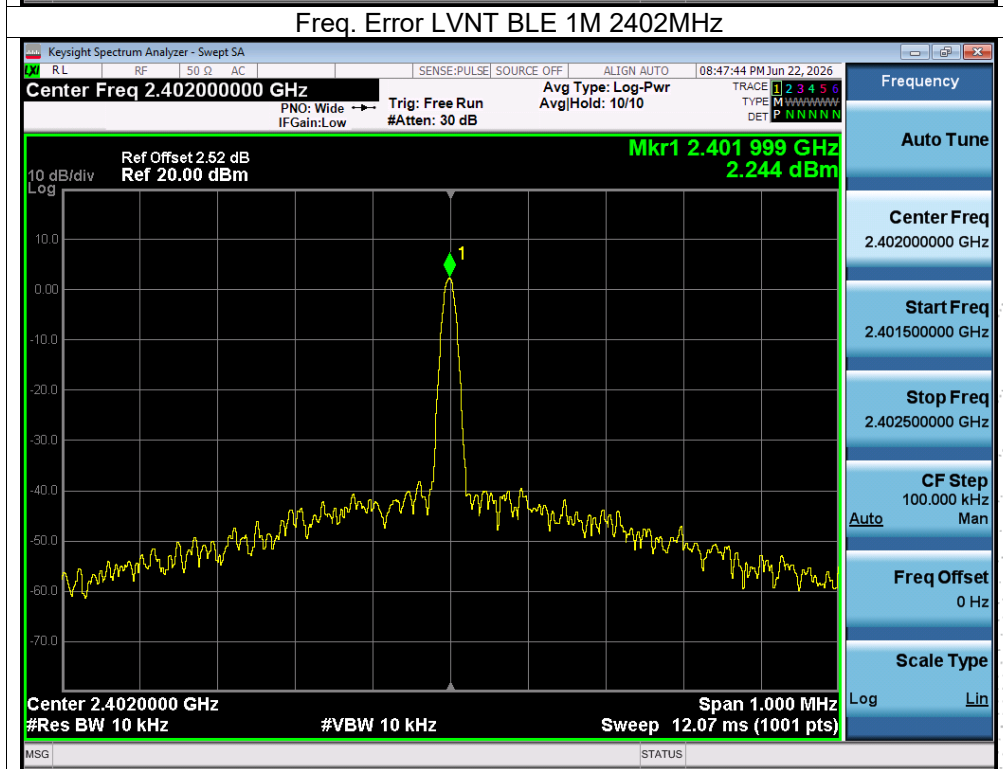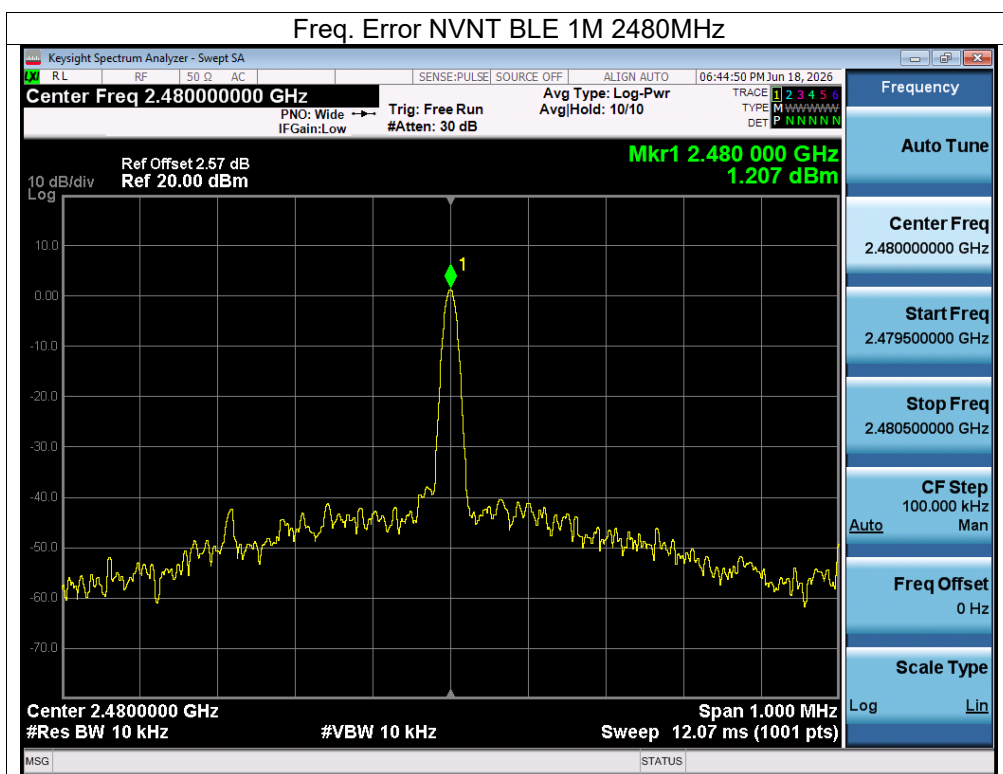

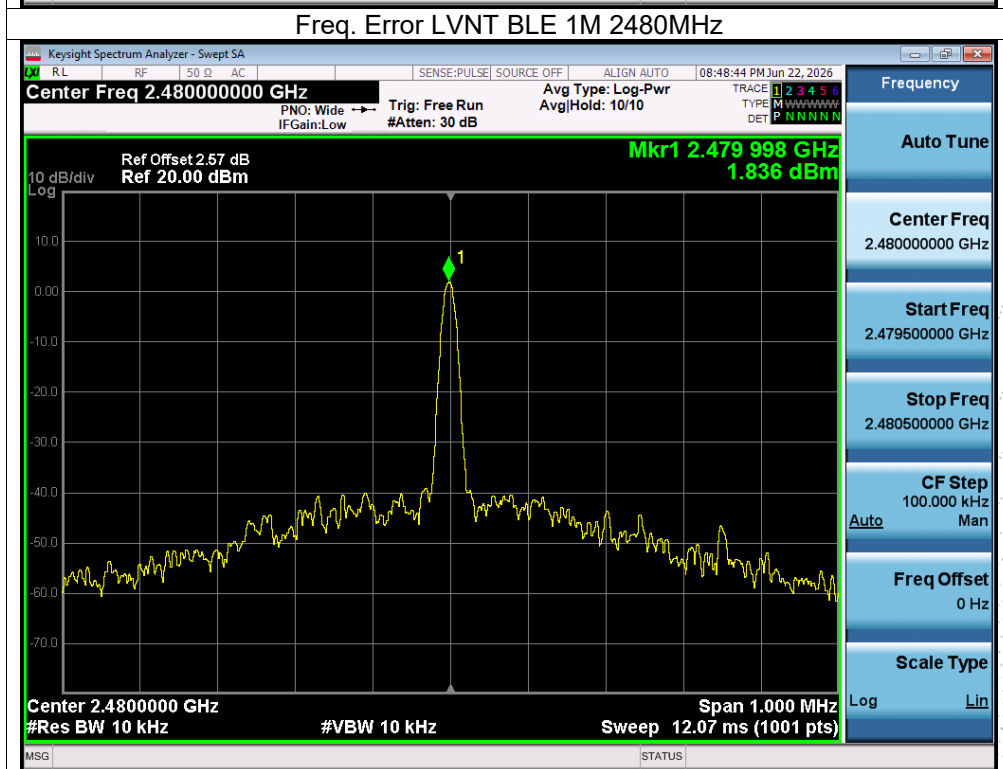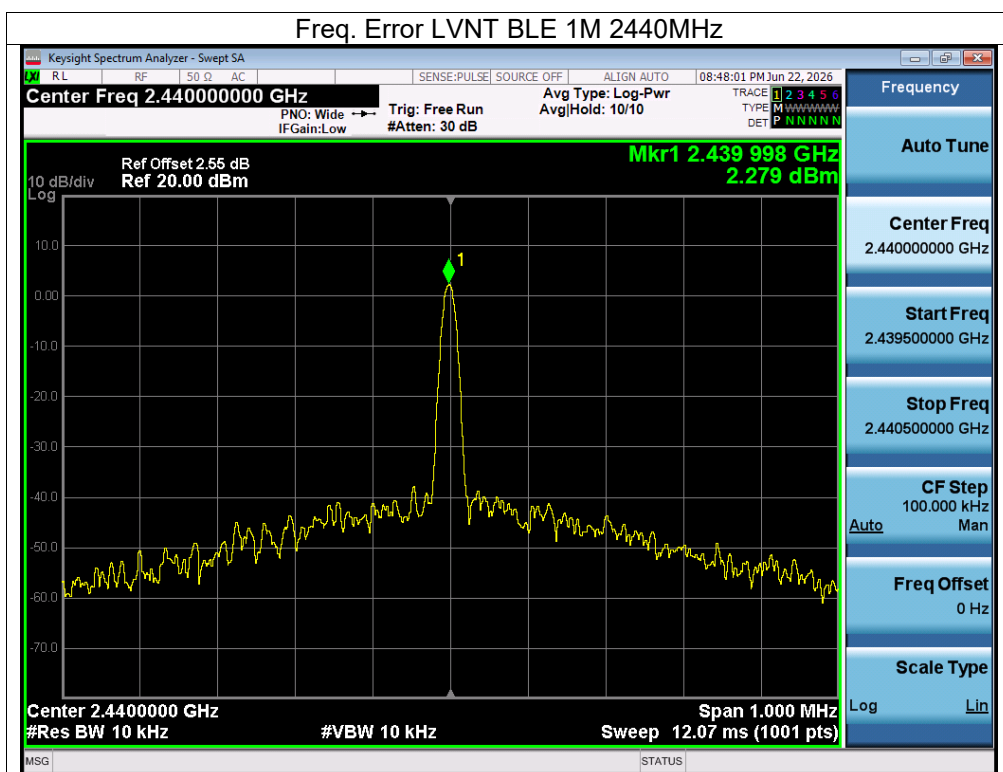

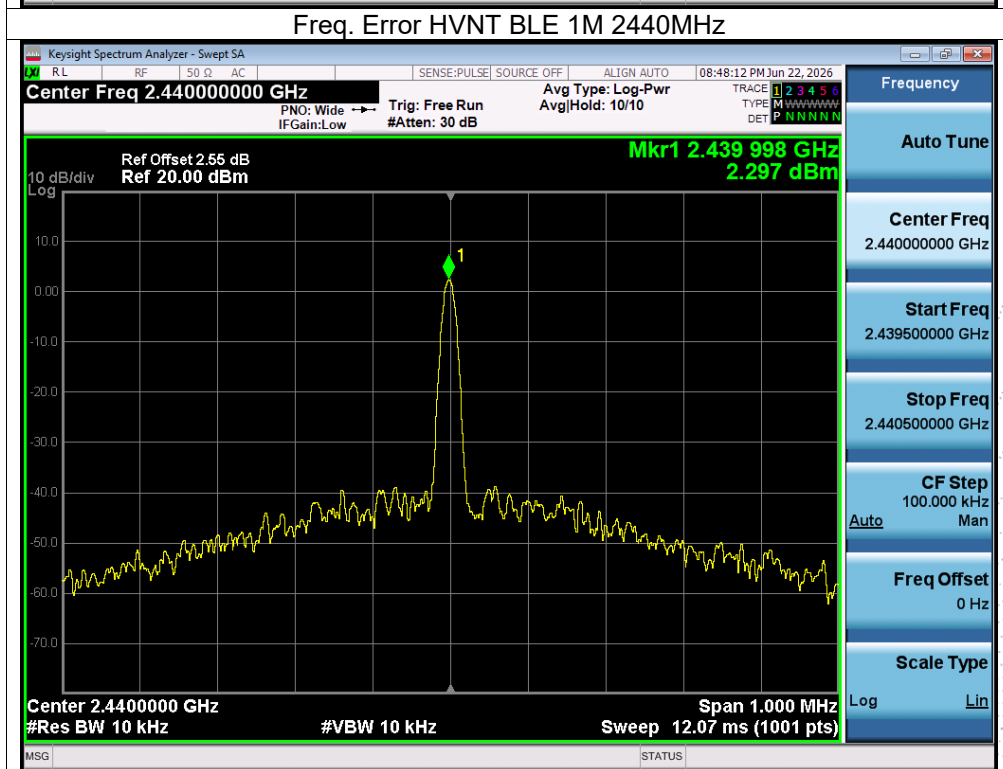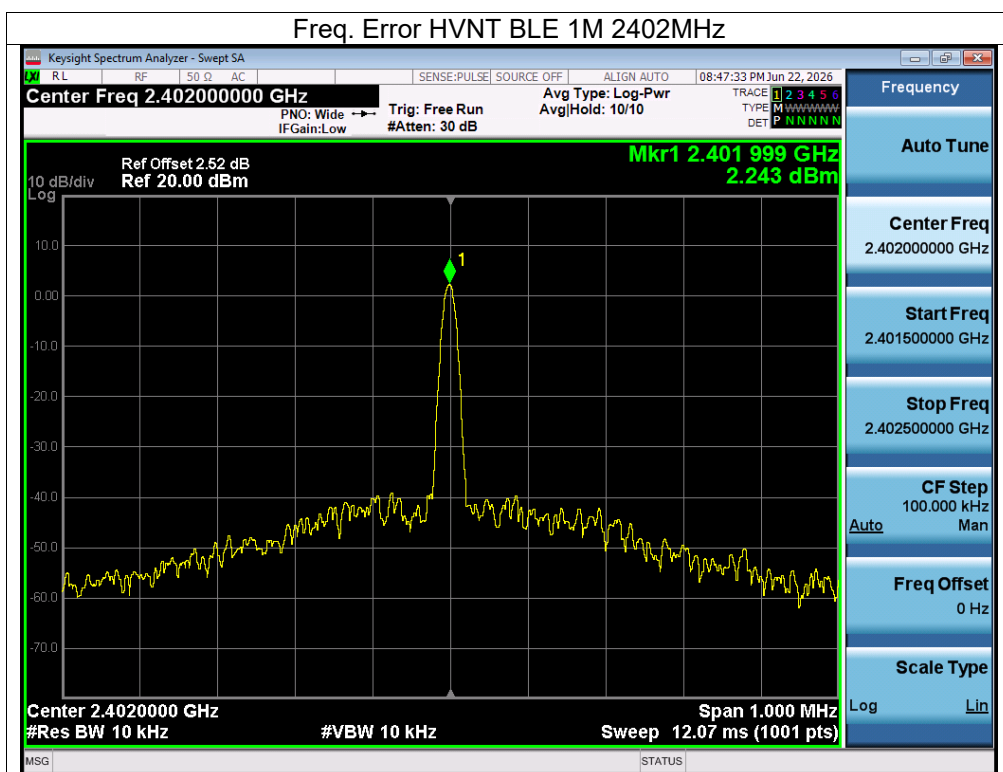

CO. LTD

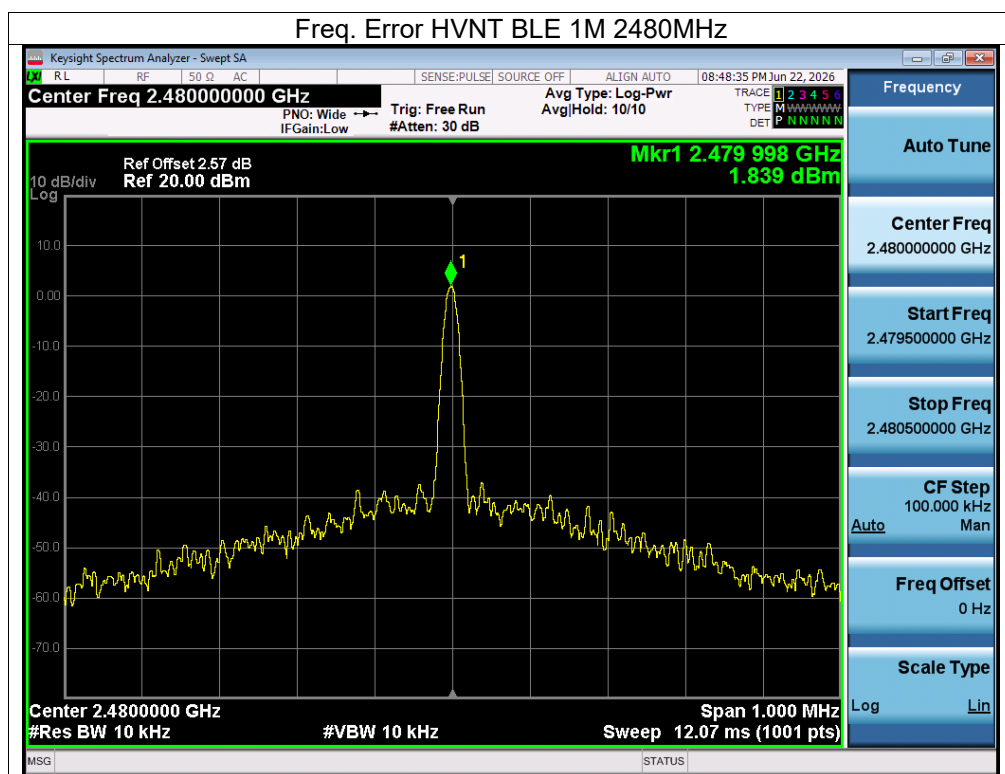

SHENZHEN

8. Antenna Power

8.1 Block Diagram Of Test Setup



8.2 Limit

Item	Limits
Antenna Power Density	(1) $\leq 3\text{mW/MHz}$ (FH, FH+DS, FH+OFDM form 2400 - 2483.5 MHz) (2) $\leq 10\text{mW/MHz}$ (OFDM OBW < 26MHz, DS, FH other than (1)) (3) $\leq 5\text{mW/MHz}$ (OFDM OBW 26-38MHz) (4) $\leq 10\text{mW/MHz}$ (Other than (1) & (2)& (3))
Antenna Power Error	+20%, No Lower Limit (Base on manufacturer declare antenna power density)

Item	Limits
EIRP Power Density	$\leq 16.91\text{dBm/MHz}$ (FH form 2427 - 2470.75 MHz) $\leq 22.14\text{dBm/MHz}$ (OFDM, DS from 2400~2483.5MHz) $\leq 22.14\text{dBm}$ (Other from 2400~2483.5MHz)
Note: This test item is not applied for radio equipment with equivalent isotropic radiation power lower than 12.14dBm/MHz, but Antenna Power(Conducted) limit is 10 mW/MHz (10 dBm/MHz), So the test item will not be applied to the transmission antenna which has a gain of 2.14dBi or less	

8.3 Test procedure

- 1: Measure the total power by Power Meter in a state of hopping mode or non-hopping mode (with Average Sensor)
 - 2: If it's the burst wave, please measure the burst ratio. Then calculate the real total power by burst ratio.
 - 3: Calculate the mean power.
- Output Power Density (mW) = Total Output Power (mW) / Duty cycle


8.4 Test Result

Temperature:	26°C		
Humidity:	54%RH	Test Voltage	DC 3.7V

Test Mode	Condition	Test Frequency (MHz)	Antenna Power (dBm)	Antenna Power (mW)	Rated output power (mW)	Antenna Power Error (%)	Limit (mW)	Verdict
GFSK (1Mbps)	NVNT	2402	2.23	1.67	1.5	11.33	10	PASS
	NVNT	2440	1.54	1.43		-4.67		
	NVNT	2480	1.26	1.34		-10.67		
	LVNT	2402	2.23	1.67		11.33		
	LVNT	2440	2.26	1.68		12.00		
	LVNT	2480	1.81	1.52		1.33		
	HVNT	2402	2.19	1.66		10.67		
	HVNT	2440	2.25	1.68		12.00		
	HVNT	2480	1.82	1.52		1.33		
GFSK (2Mbps)	NVNT	2402	1.71	1.48		-1.33		
	NVNT	2440	1.56	1.43		-4.67		
	NVNT	2480	1.23	1.33		-11.33		
	LVNT	2402	2.21	1.66		10.67		
	LVNT	2440	2.24	1.68		12.00		
	LVNT	2480	1.8	1.51		0.67		
	HVNT	2402	2.22	1.67		11.33		
	HVNT	2440	2.25	1.68		12.00		
	HVNT	2480	1.8	1.51		0.67		
Limit: +20%, -80% (Base on manufacturer declare antenna power density)								

9. Occupied Bandwidth

9.1 Block Diagram Of Test Setup

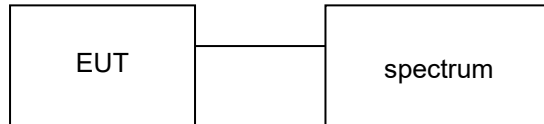

9.2 Limit

Item	Limits
Occupied Band Width:	FH 83.5MHz; OFDM,DS $\leq$ 26MHz;Others $\leq$ 26MHz

9.3 Test procedure


1. Setting of SA is following as: RB: 300kHz / VB:300kHz / SPAN: 3MHz / AT: 20dB Ref: 10dBm / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold
2. EUT have transmitted the maximum modulation signal and fixed channelize (For DSSS or OFDM Device) or continuous maximum power of hopping mode(For FHSS Device). SA set to 99% of occupied bandwidth to measure occupied bandwidth. The limit is less than 26MHz (For DSSS or OFDM Device) or 83.5MHz (For FHSS Device).
3. SA set to 90% of occupied bandwidth to measure Spread Spectrum Bandwidth.
4. Spread Spectrum Factor = Spread Spectrum Bandwidth / modulation rate of EUT.
5. Spread Spectrum Factor limit is greater than 5



9.4 Test Result

Temperature:	26°C		
Humidity:	54%RH	Test Voltage	DC 3.7V


Test Mode	Test Frequency MHz	Condition	99%Occupied bandwidth MHz	90%Spread bandwidth MHz	Occupied Bandwidth Limit MHz	Verdict
GFSK (1Mbps)	2402	NVNT	1.217	0.821	≤26MHz	PASS
	2440	NVNT	1.218	0.822	≤26MHz	PASS
	2480	NVNT	1.23	0.825	≤26MHz	PASS
	2402	LVNT	1.217	0.821	≤26MHz	PASS
	2440	LVNT	1.22	0.822	≤26MHz	PASS
	2480	LVNT	1.22	0.822	≤26MHz	PASS
	2402	NVNT	1.216	0.821	≤26MHz	PASS
	2440	NVNT	1.221	0.822	≤26MHz	PASS
	2480	NVNT	1.22	0.822	≤26MHz	PASS
GFSK (2Mbps)	2402	NVNT	2.077	1.34	≤26MHz	PASS
	2440	NVNT	2.075	1.341	≤26MHz	PASS
	2480	NVNT	2.088	1.35	≤26MHz	PASS
	2402	LVNT	2.072	1.338	≤26MHz	PASS
	2440	LVNT	2.072	1.337	≤26MHz	PASS
	2480	LVNT	2.073	1.34	≤26MHz	PASS
	2402	NVNT	2.07	1.335	≤26MHz	PASS
	2440	NVNT	2.072	1.337	≤26MHz	PASS
	2480	NVNT	2.071	1.341	≤26MHz	PASS


STING
ED


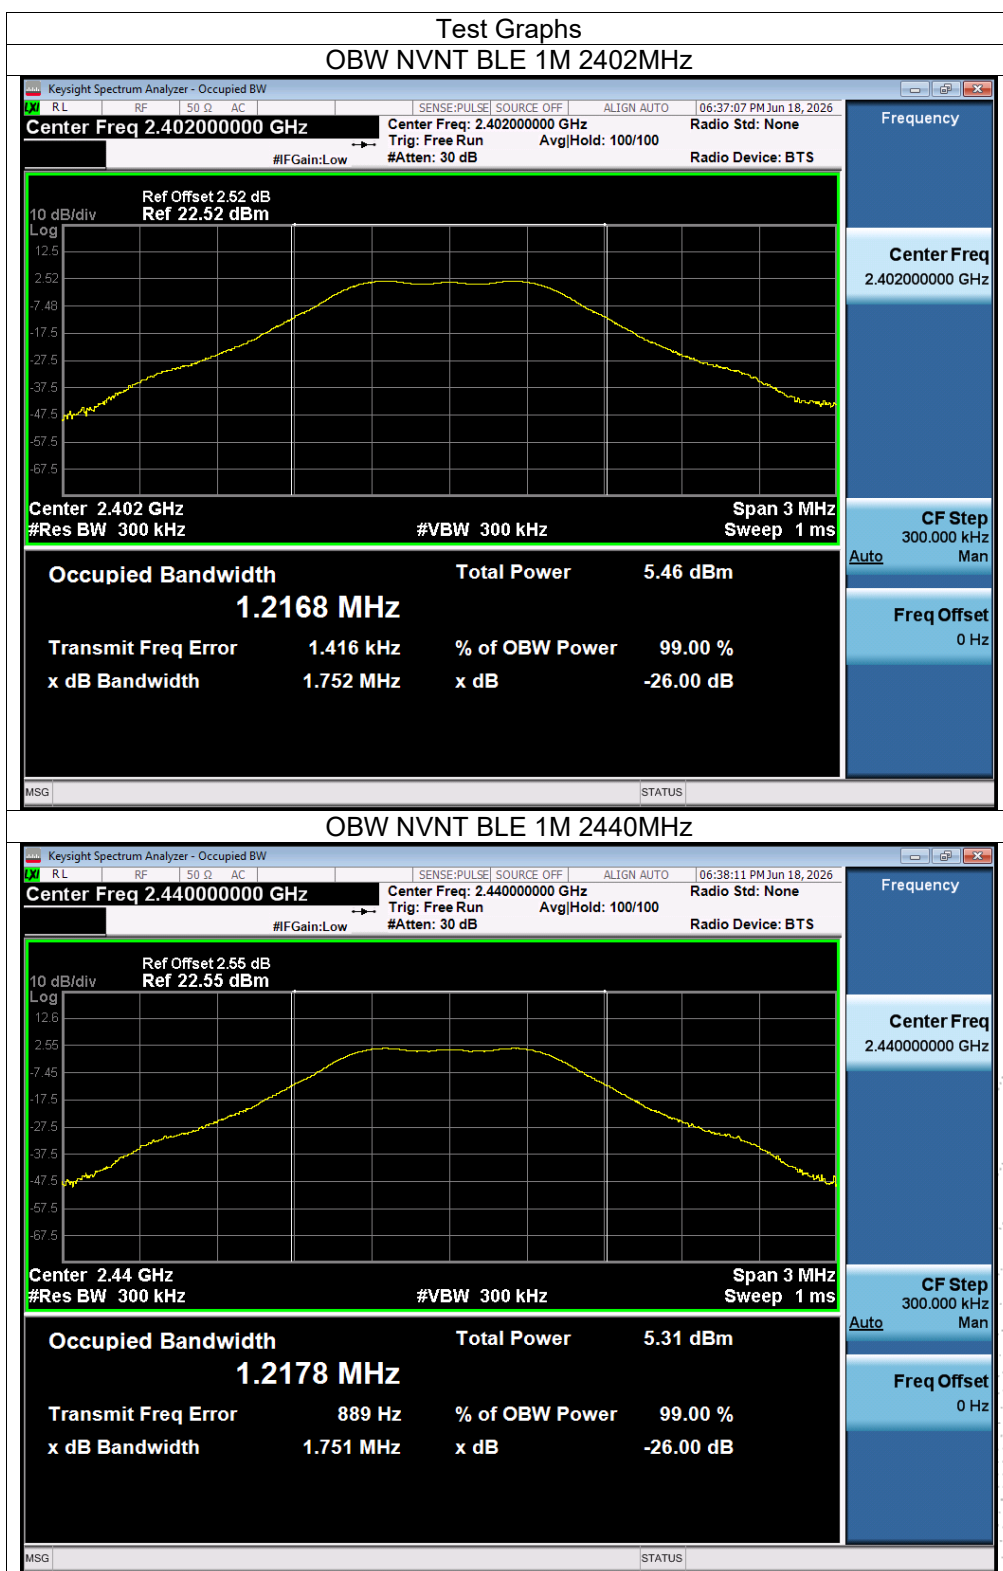


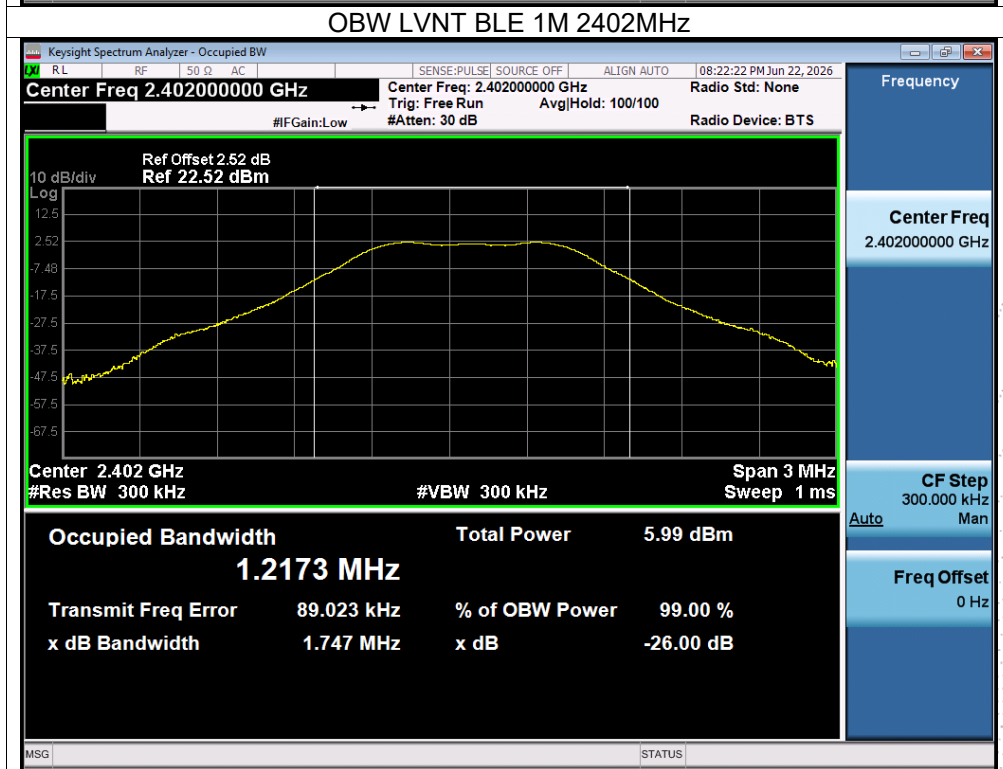
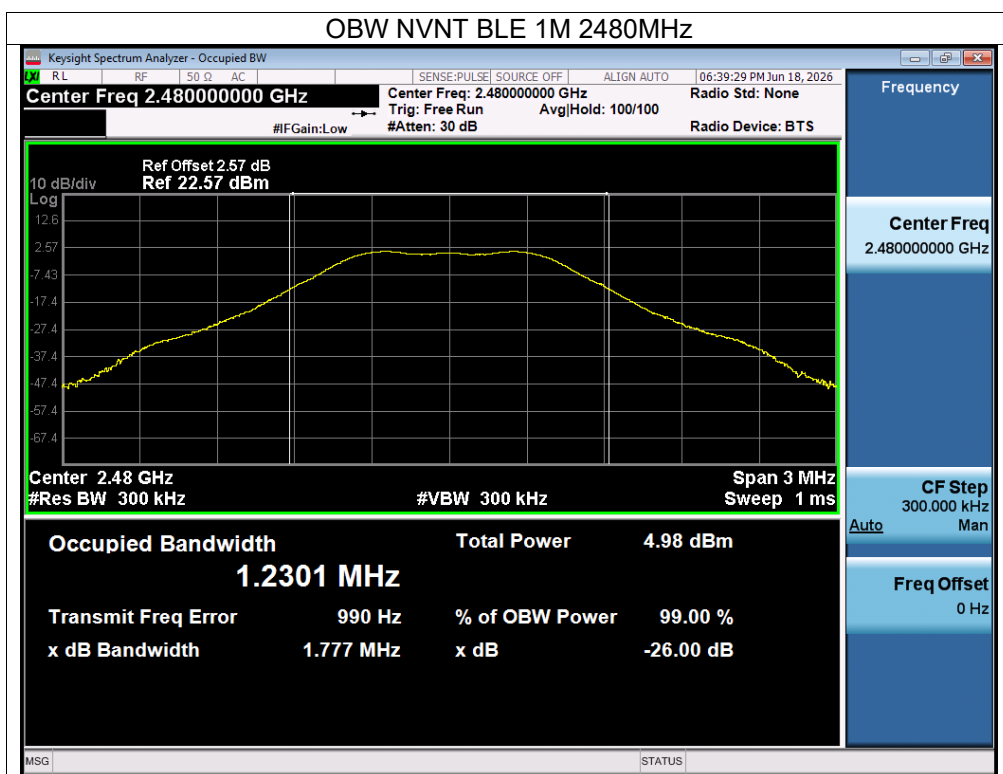






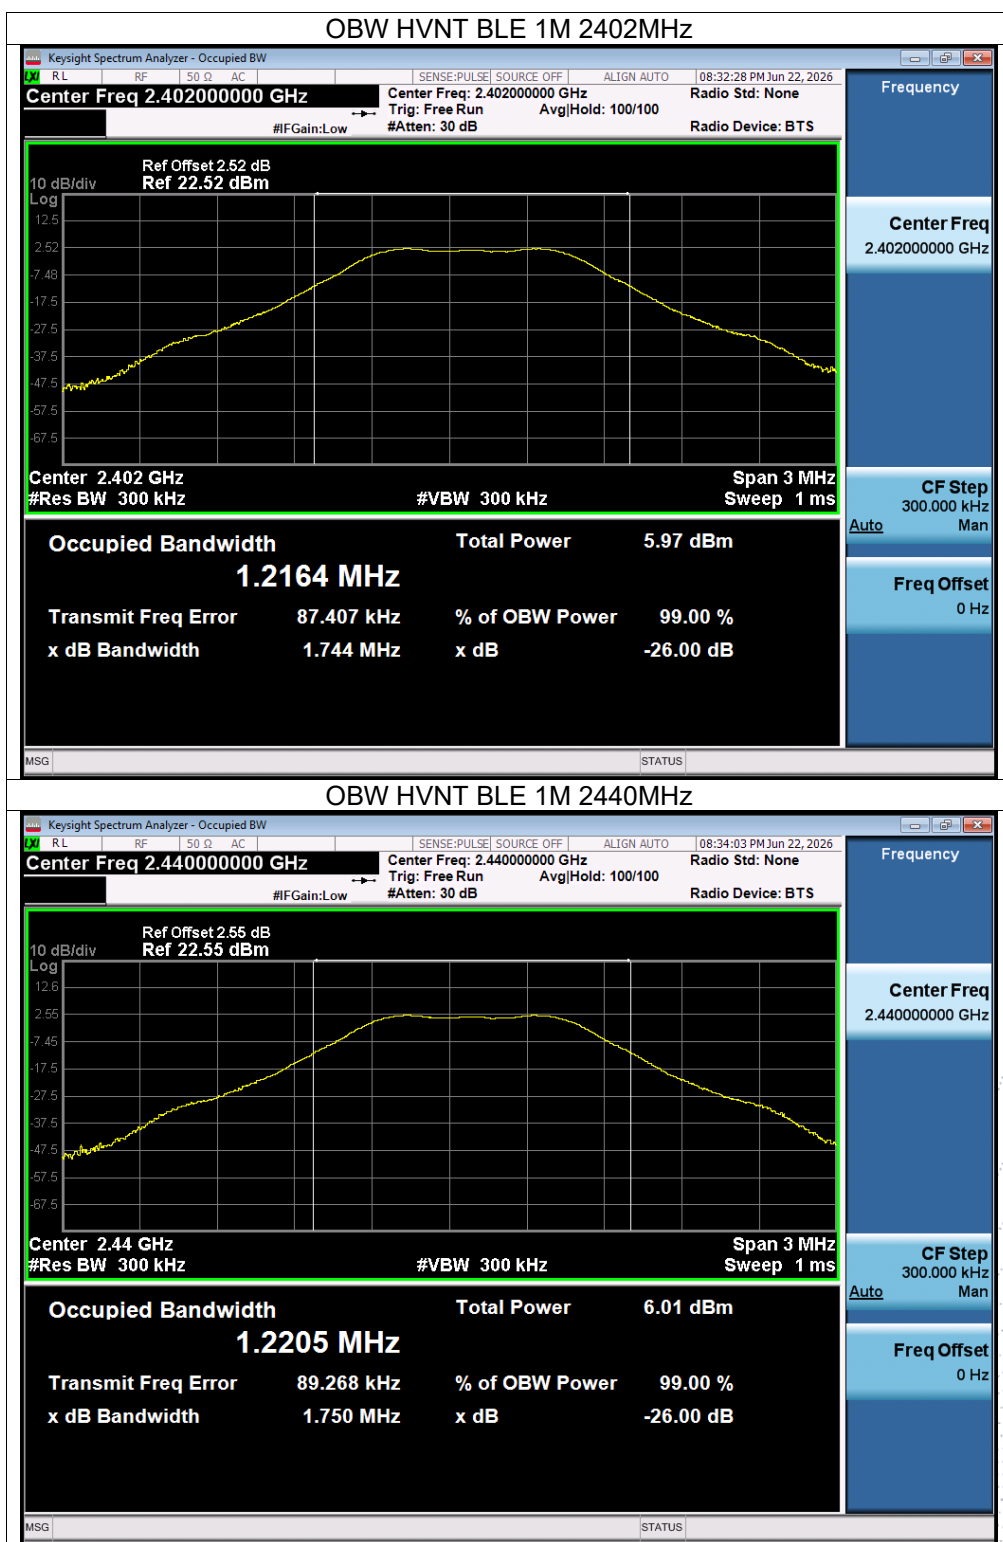


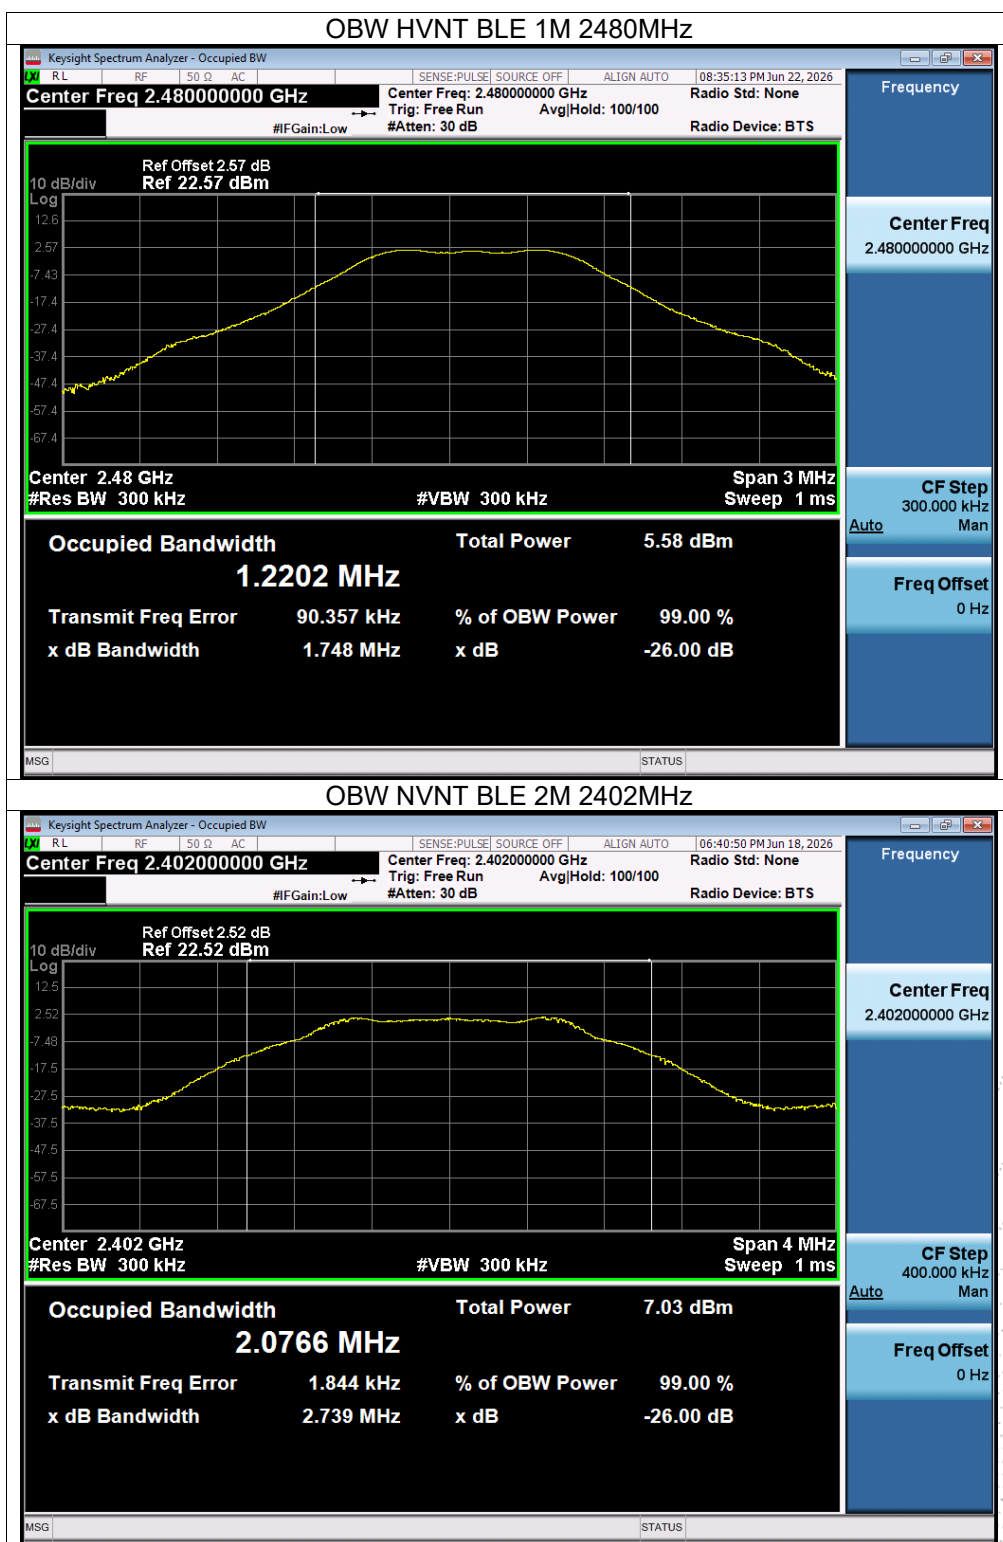


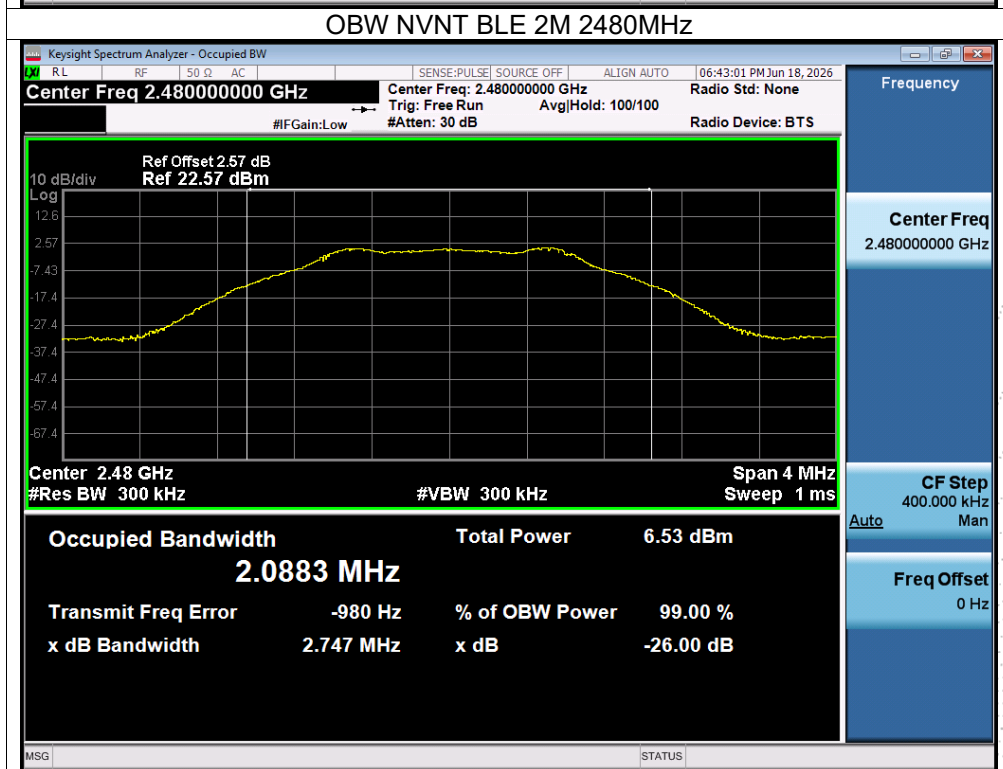
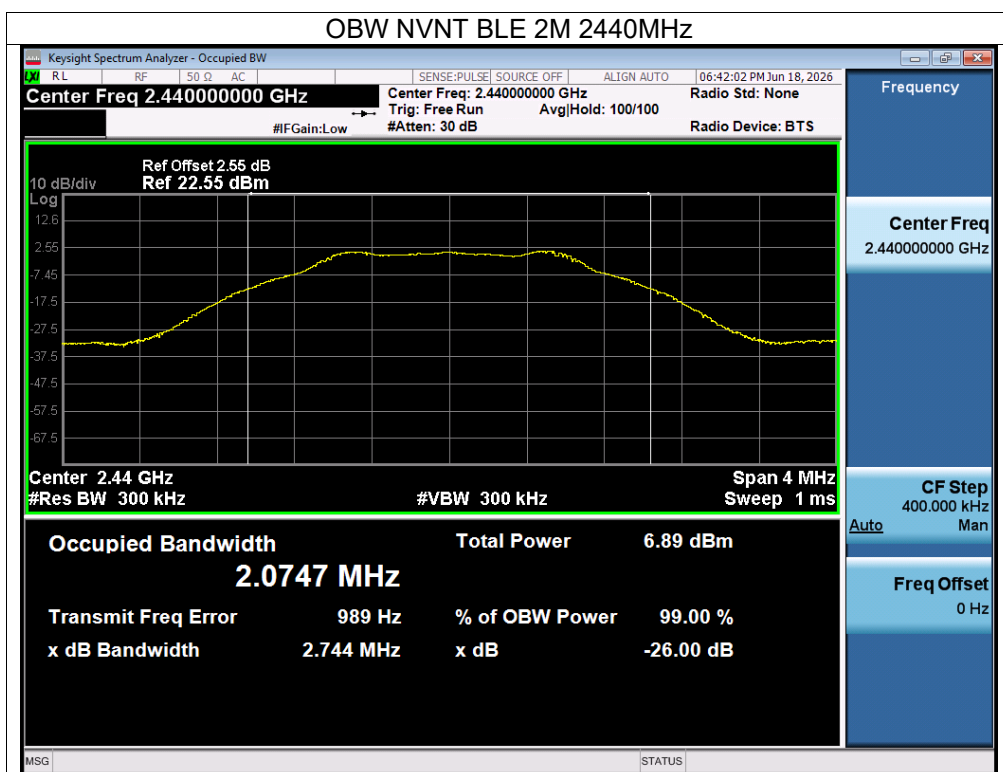


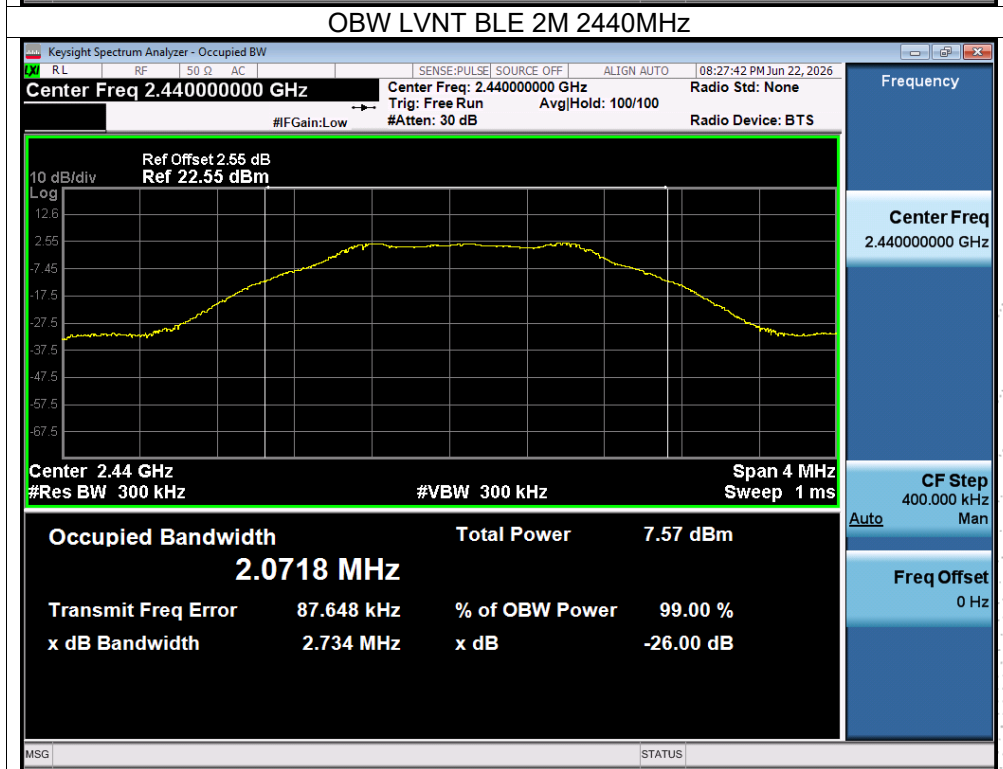
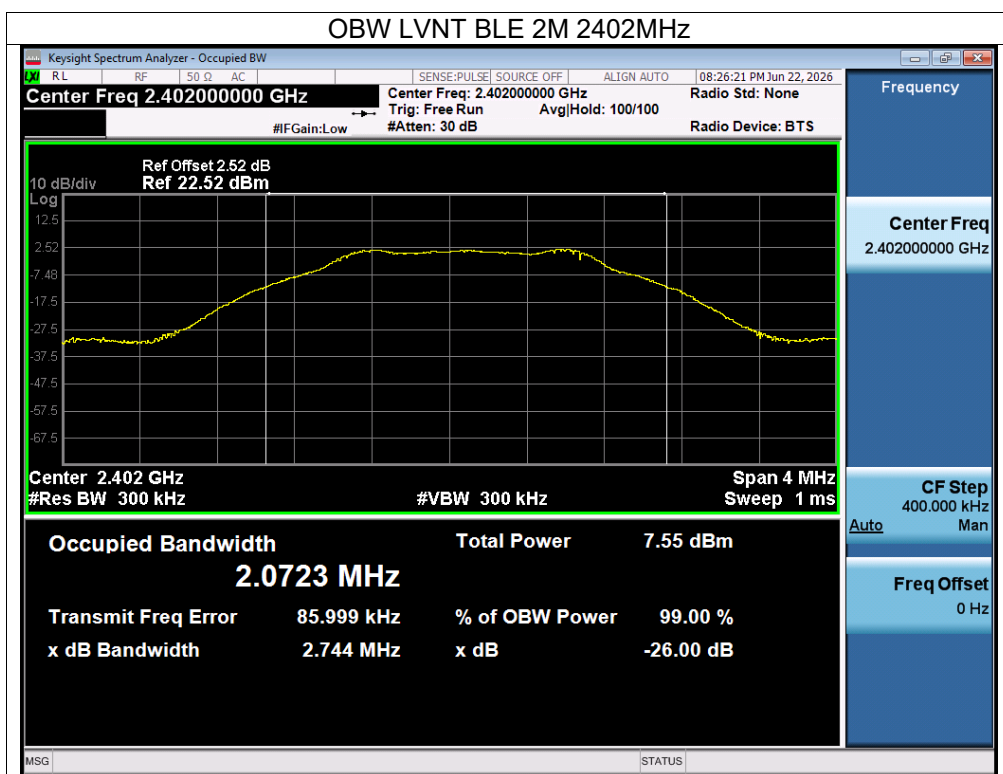


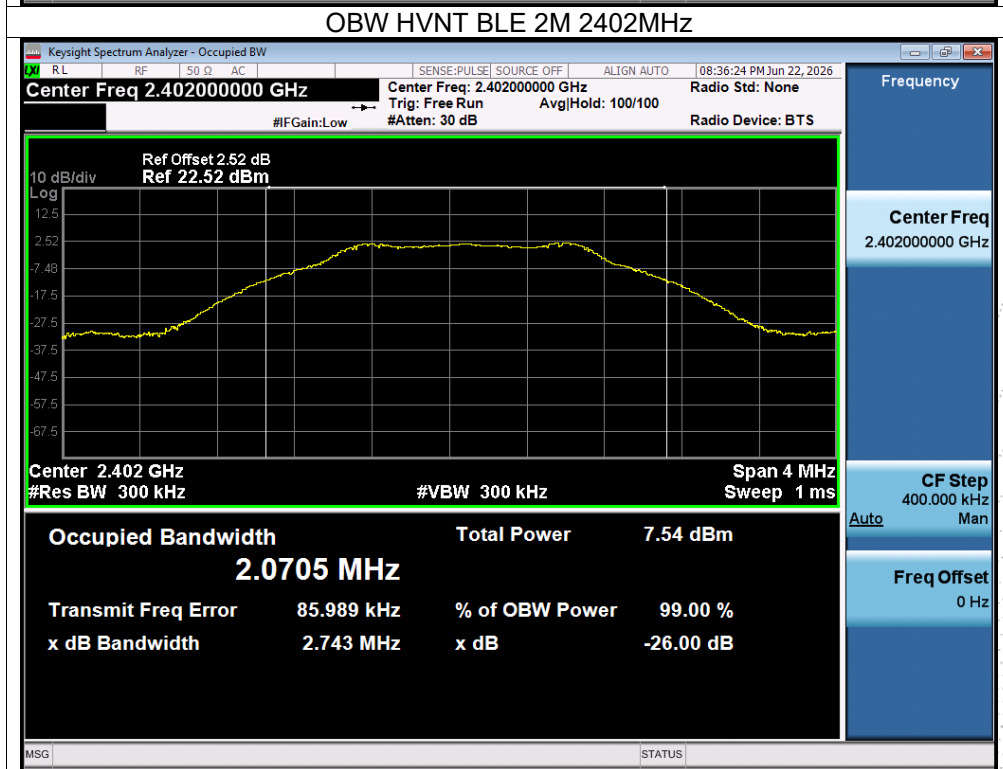
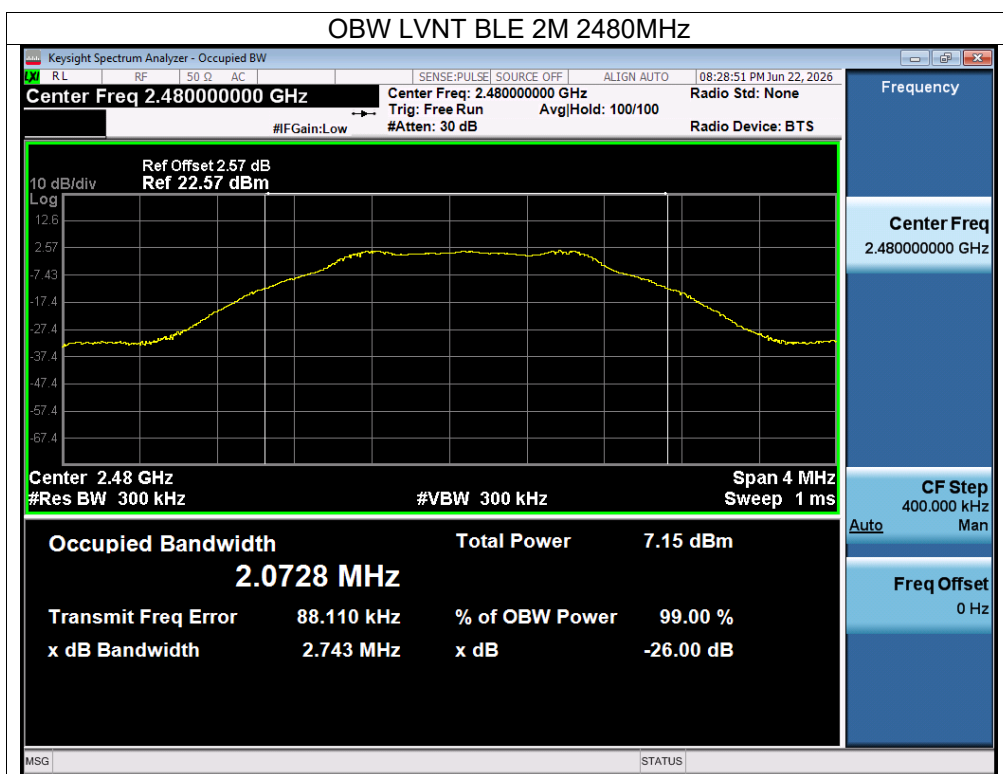



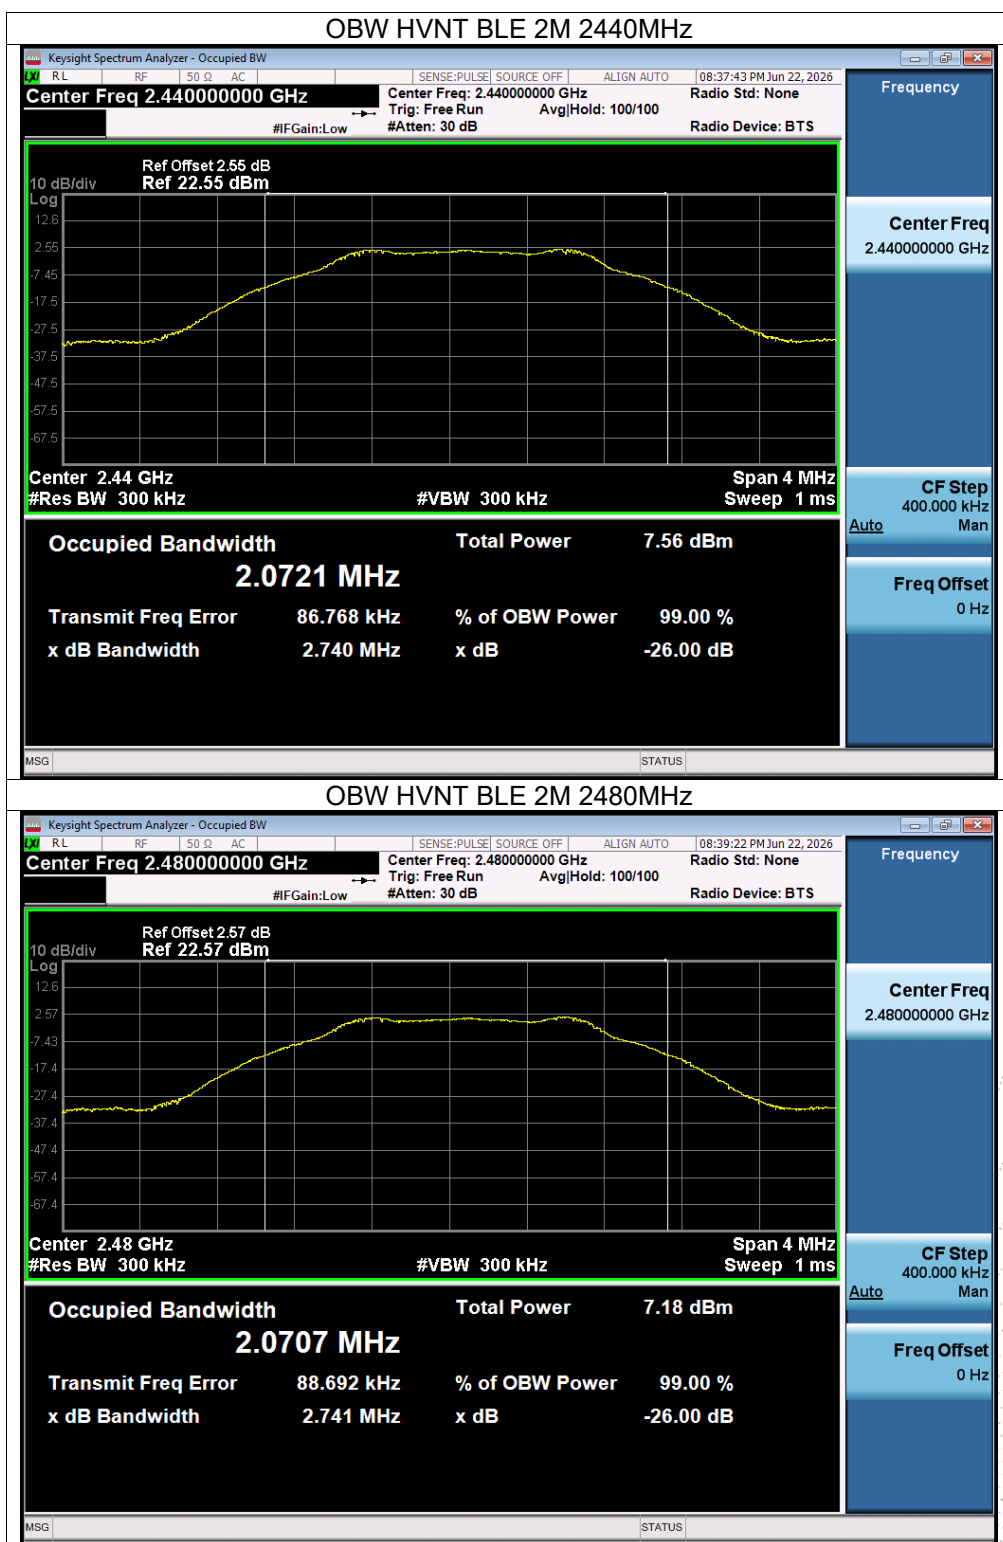



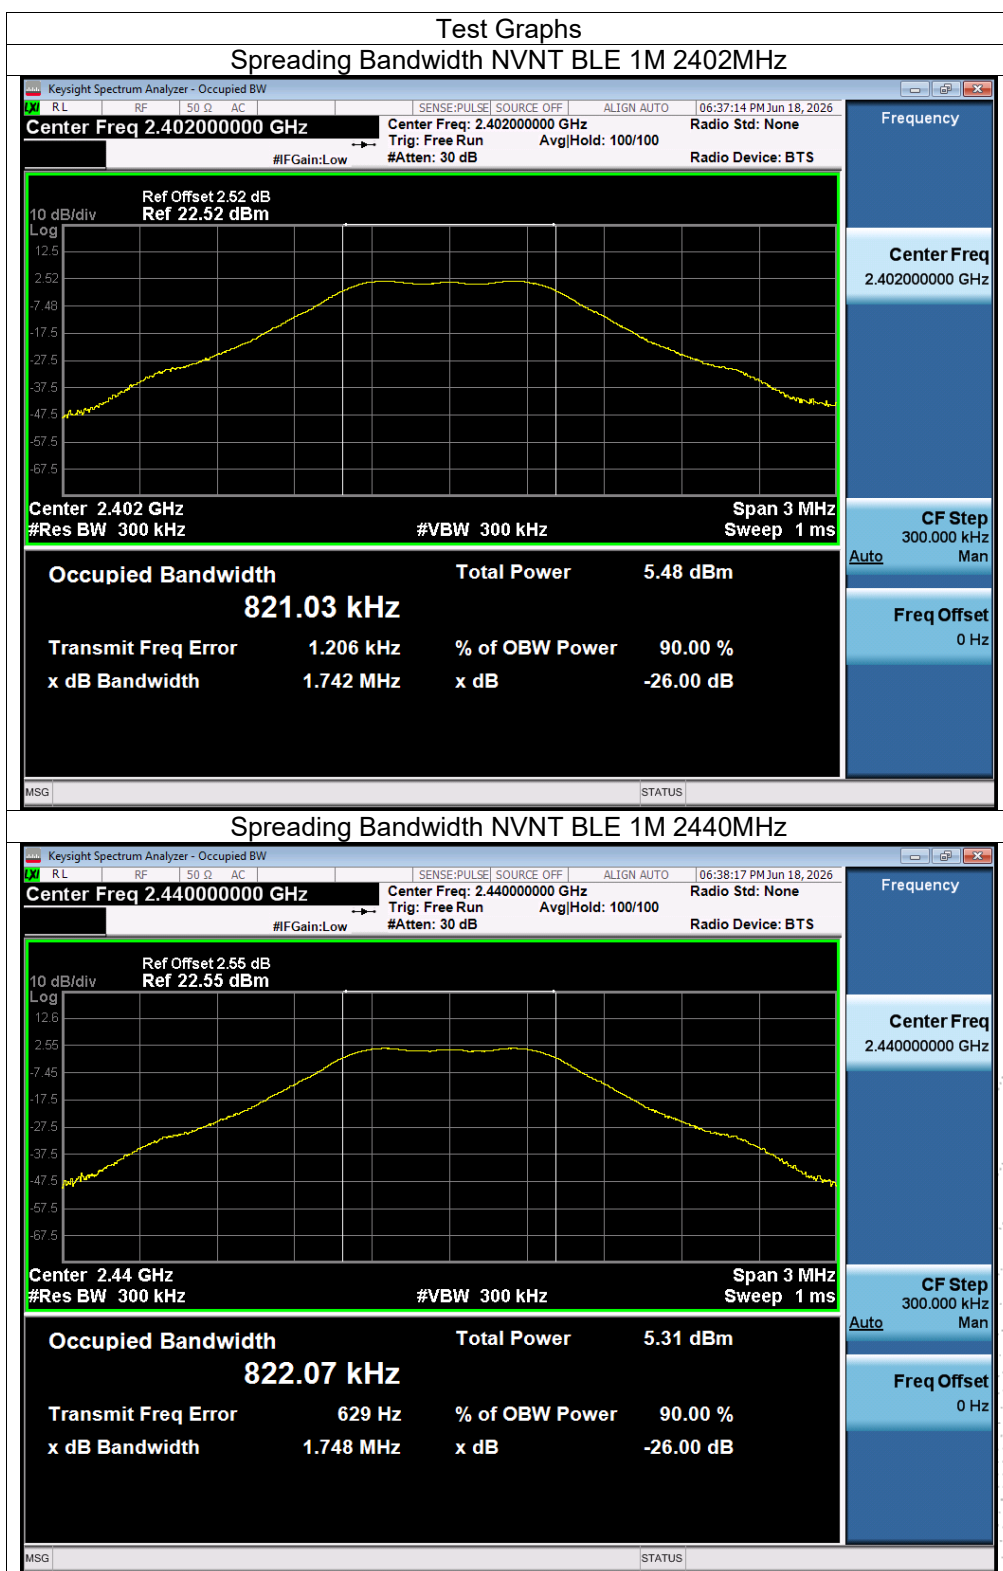


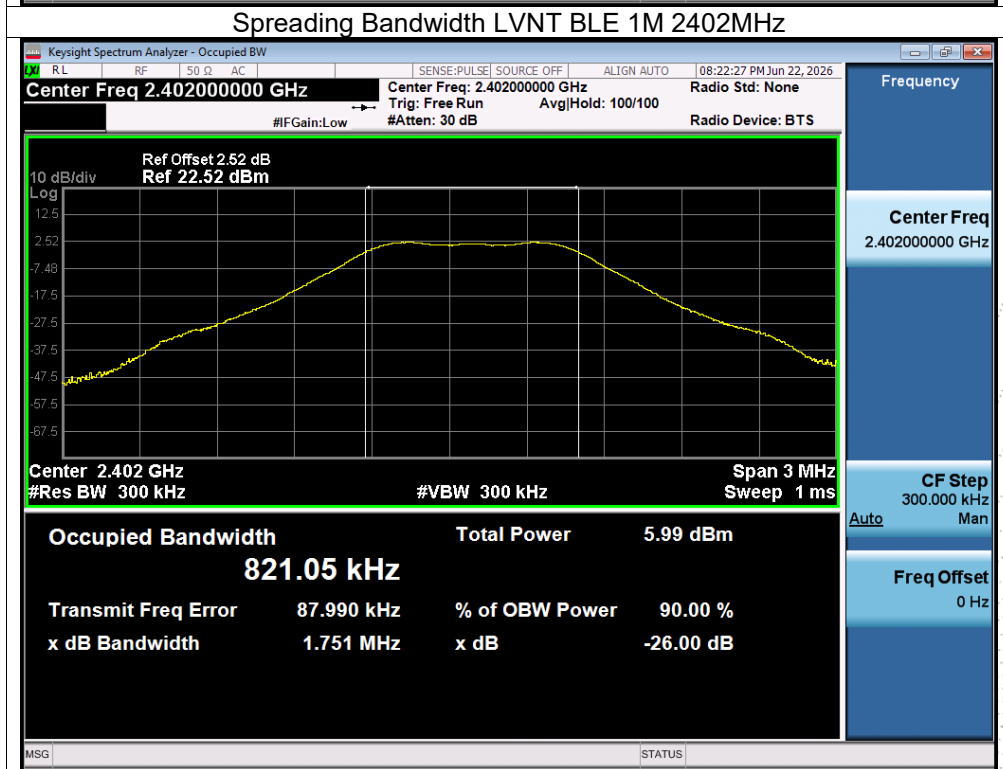
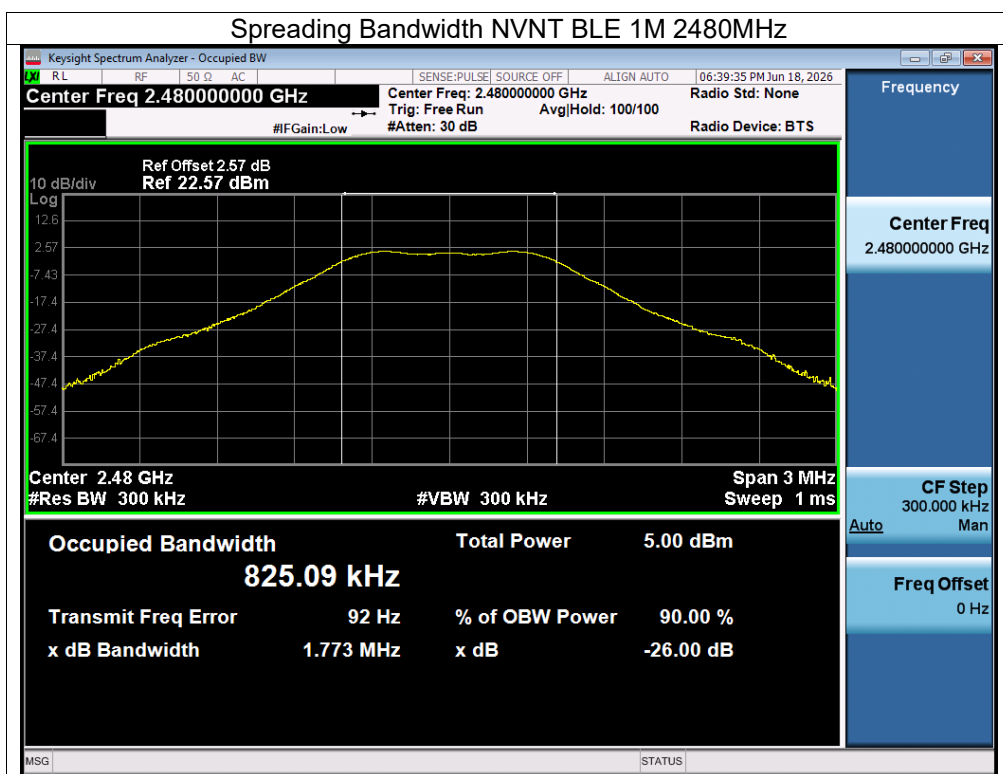


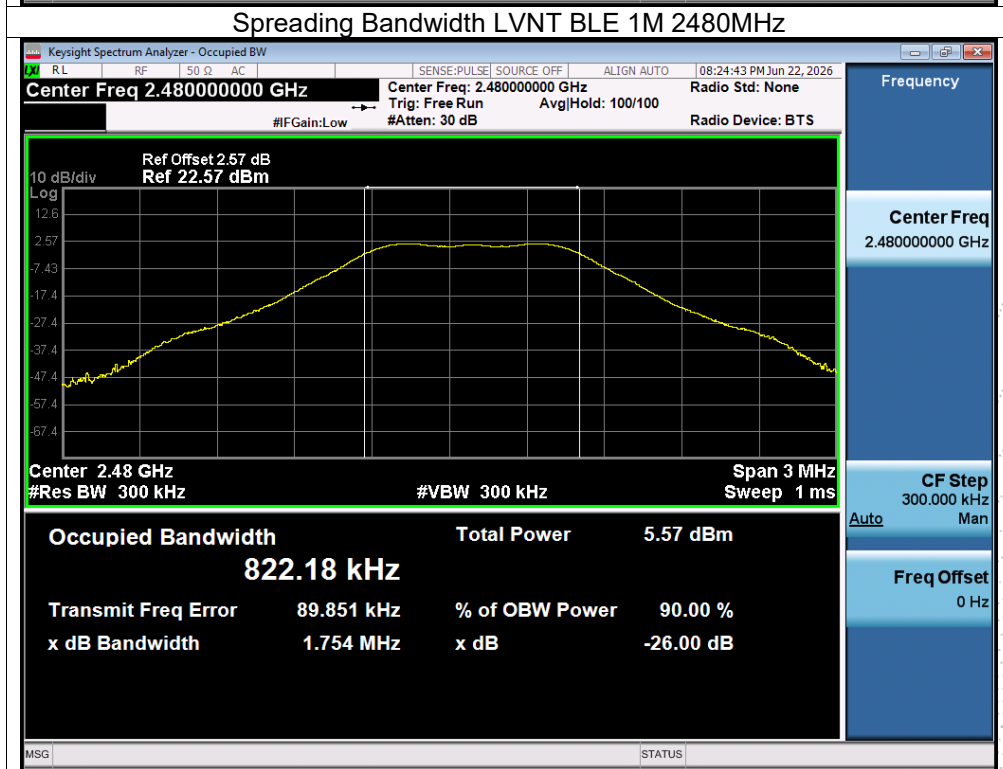
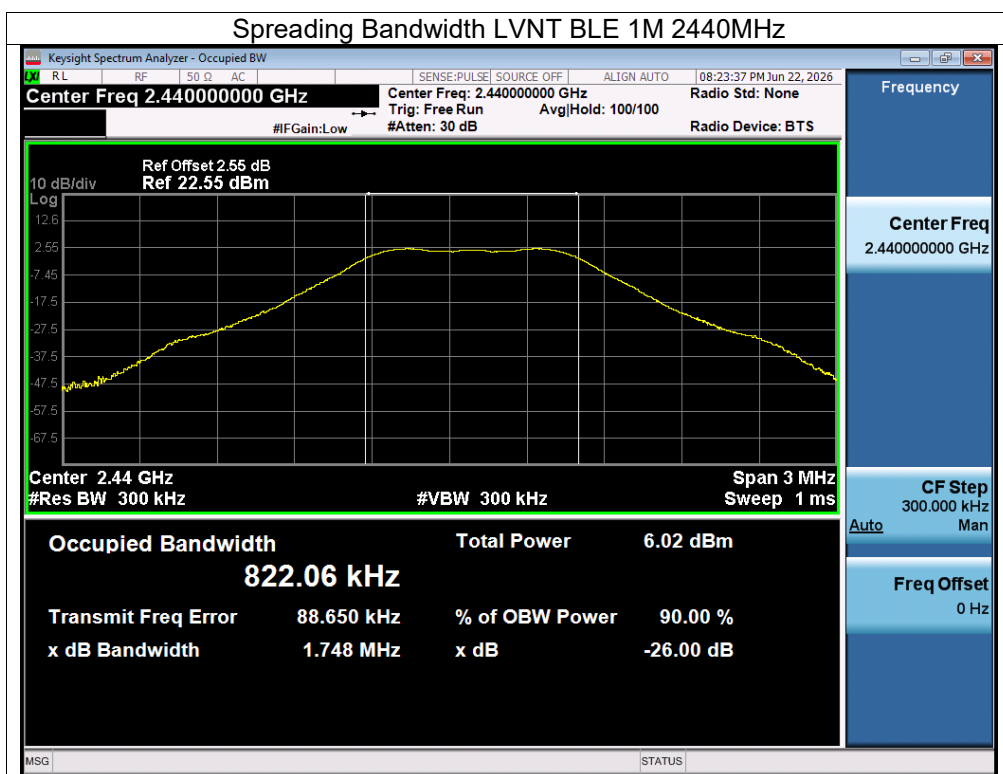


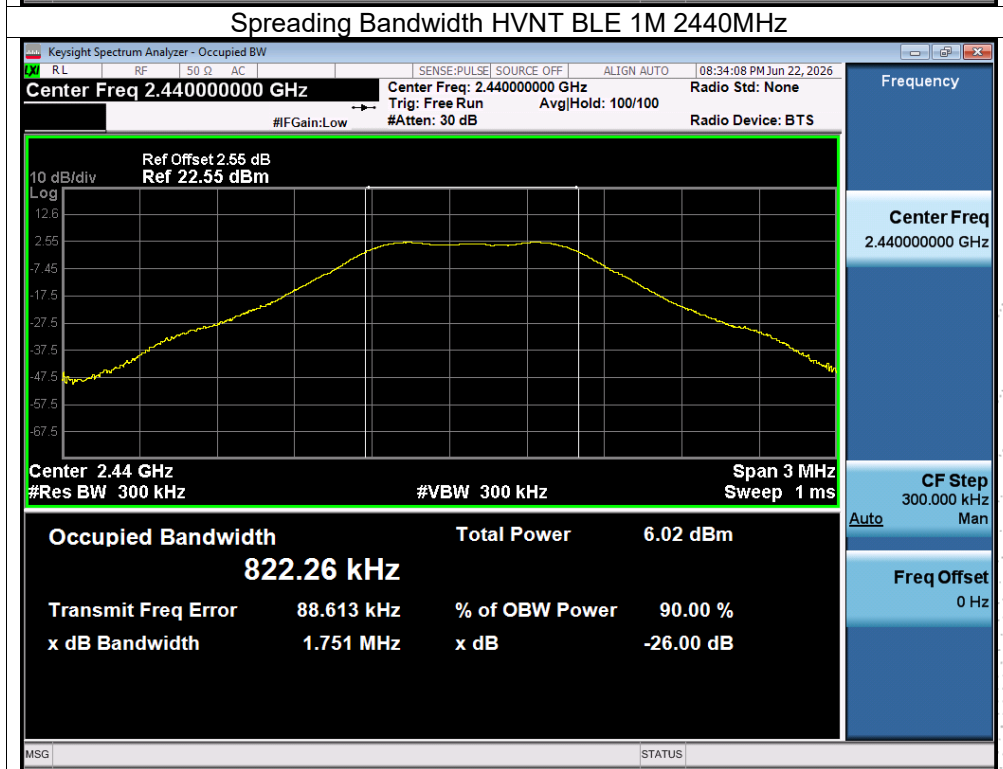
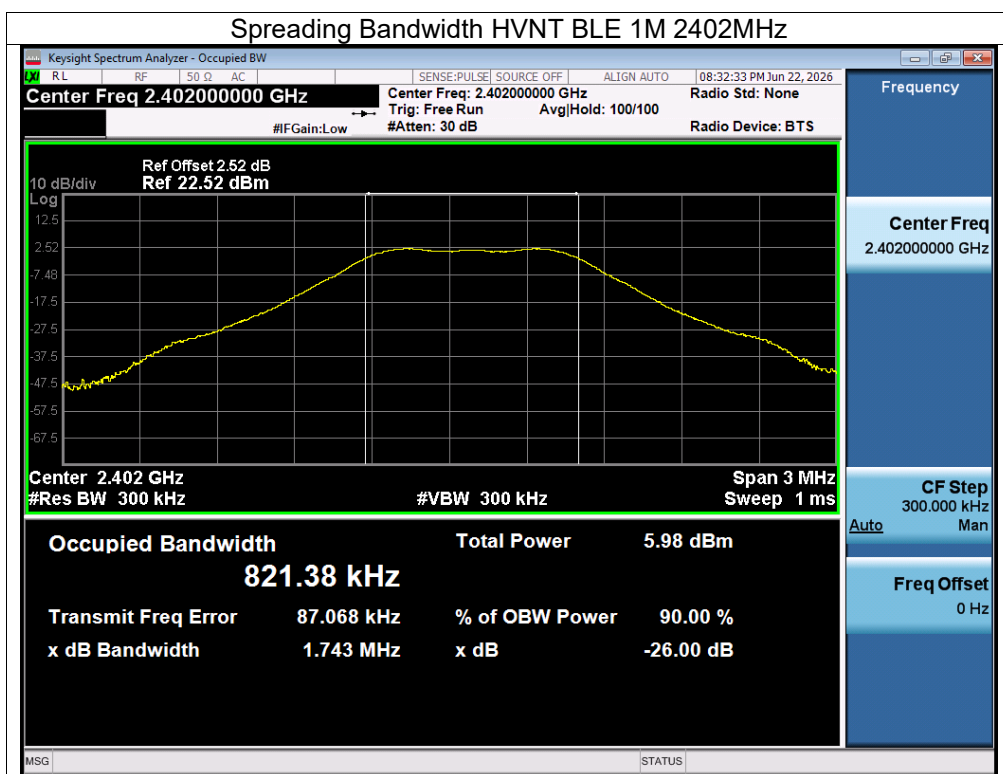


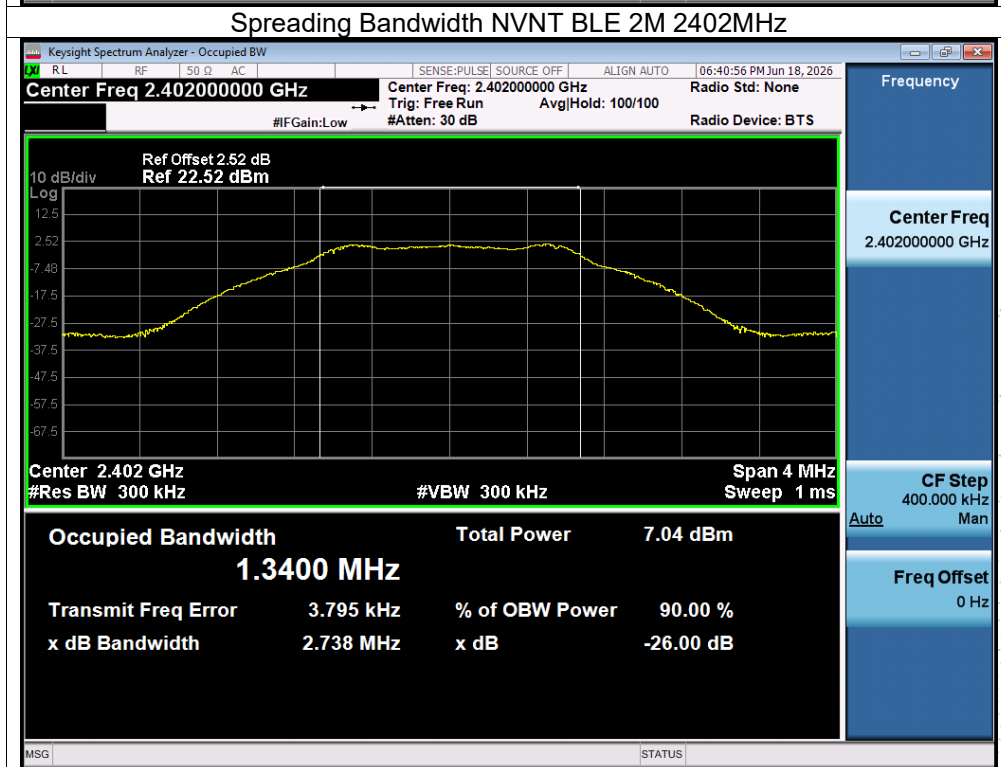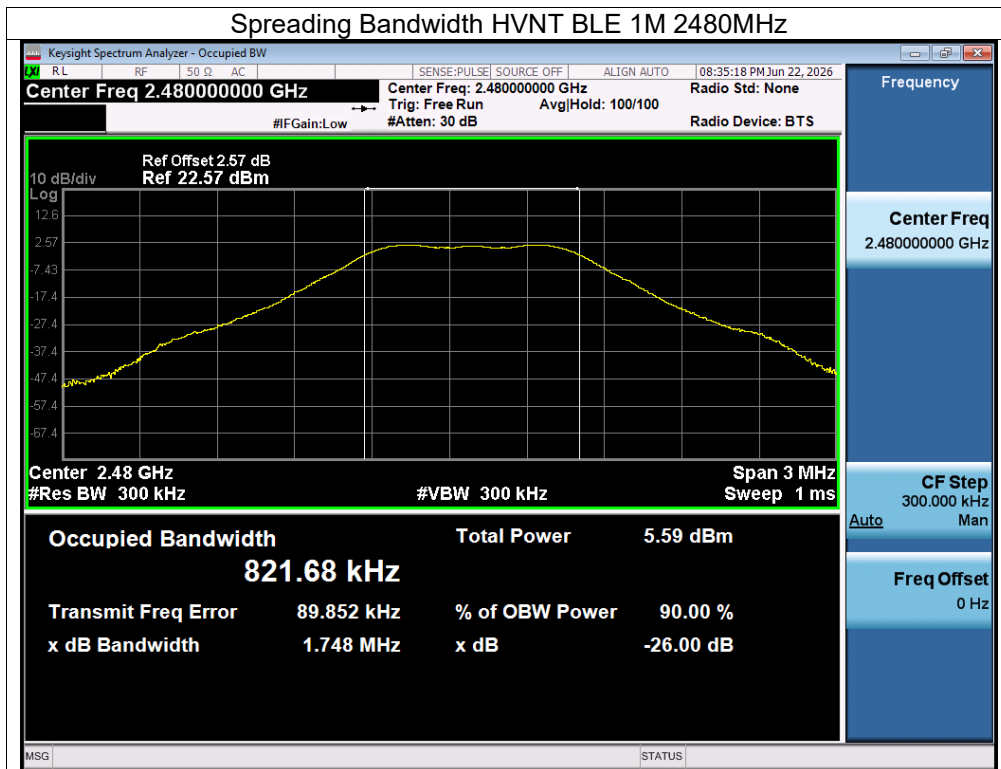

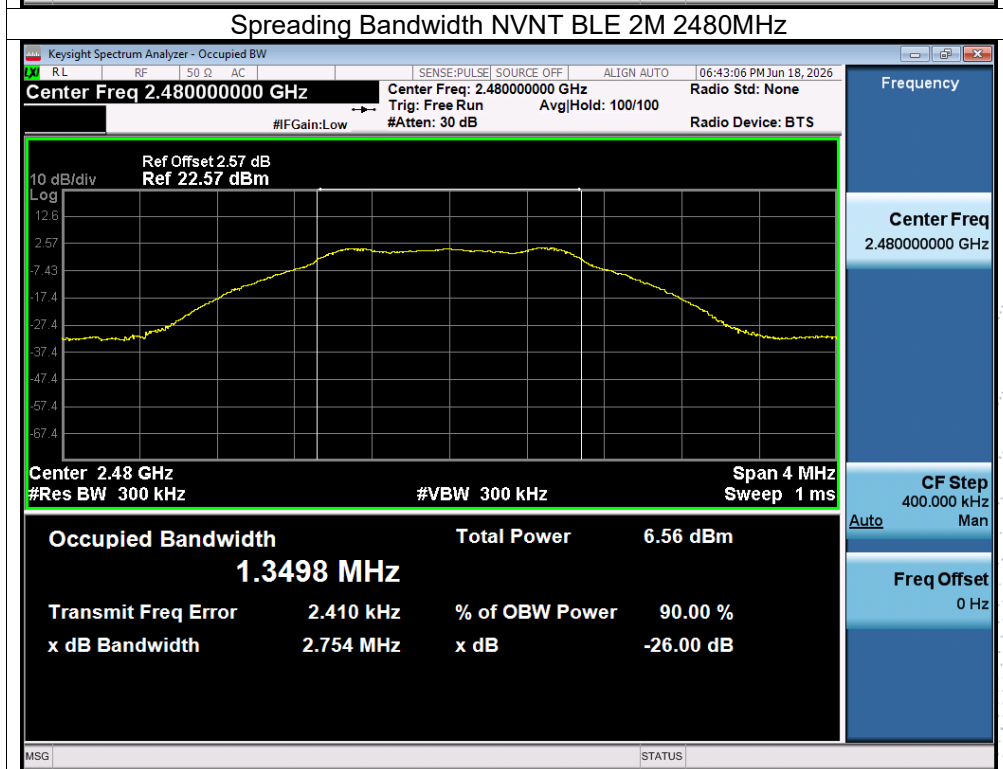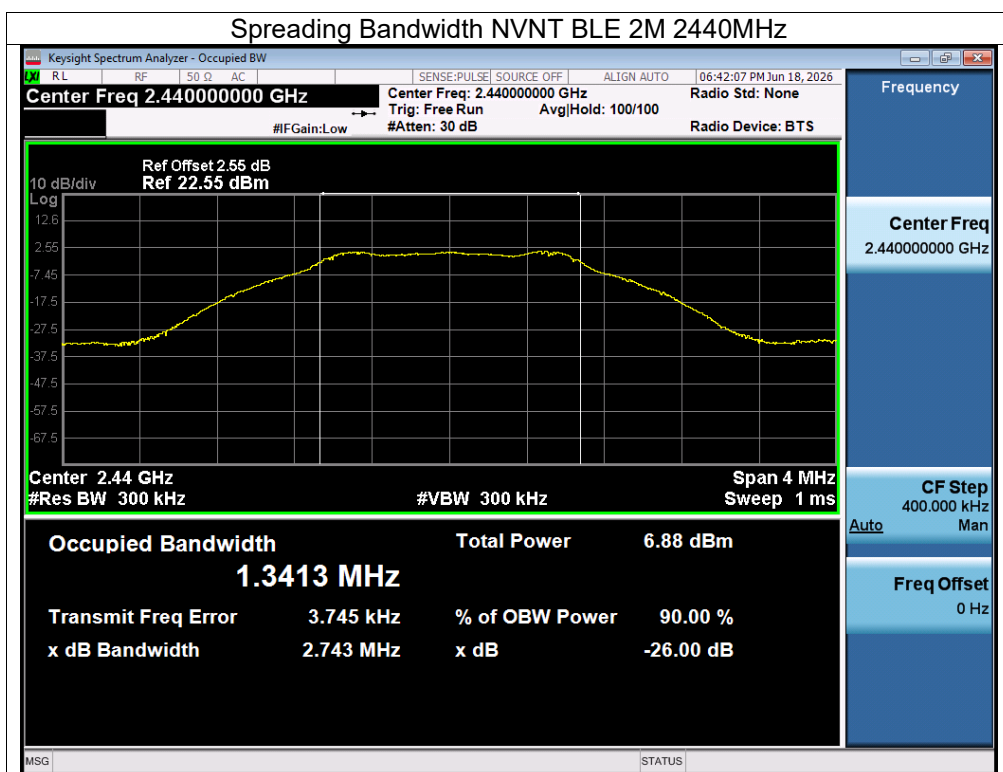

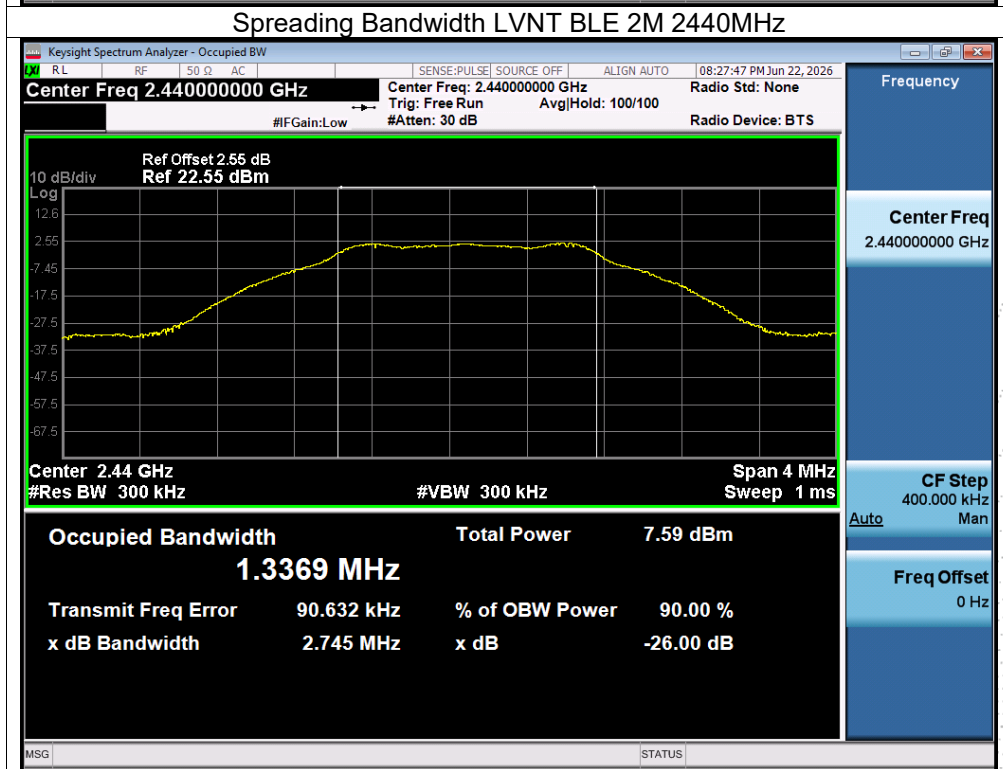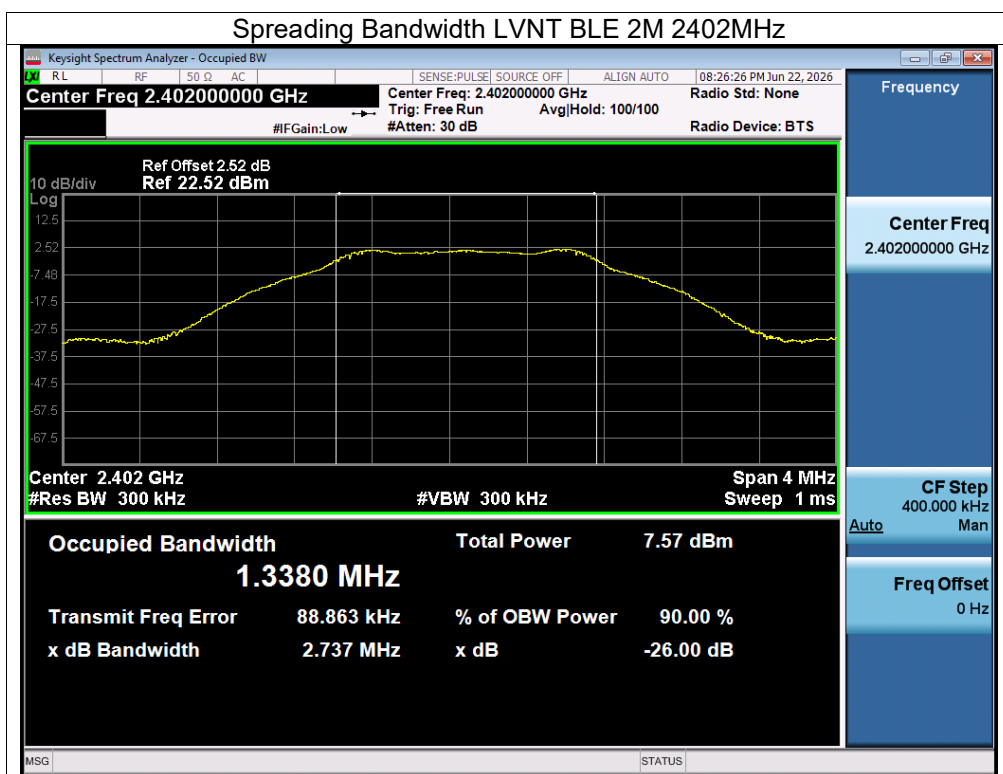


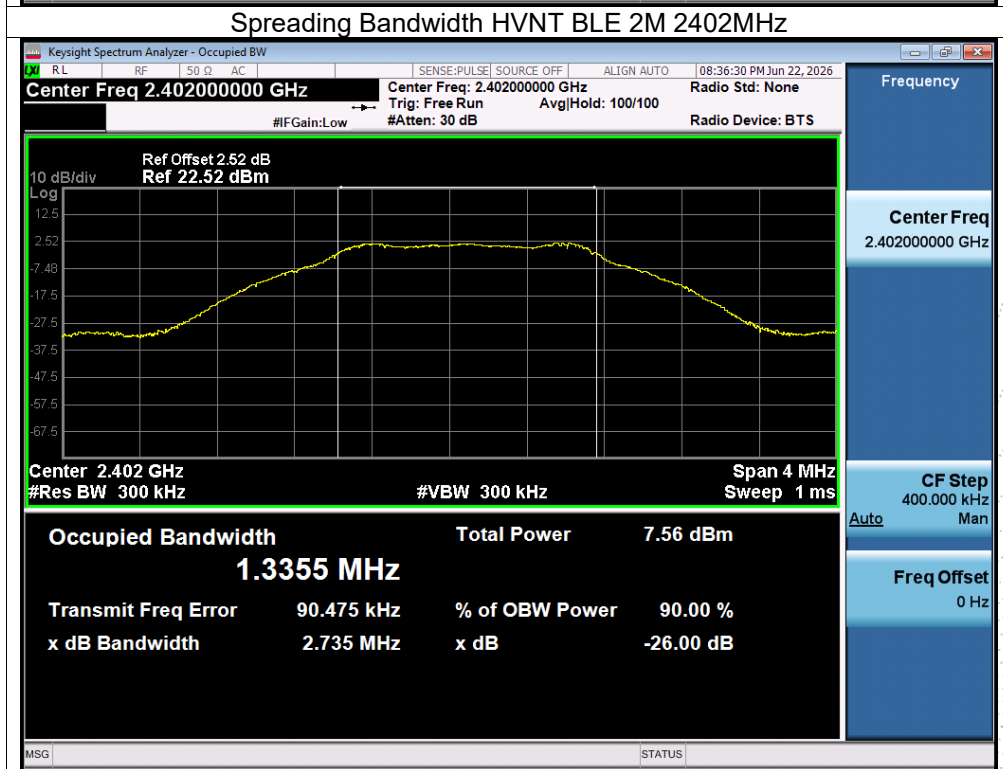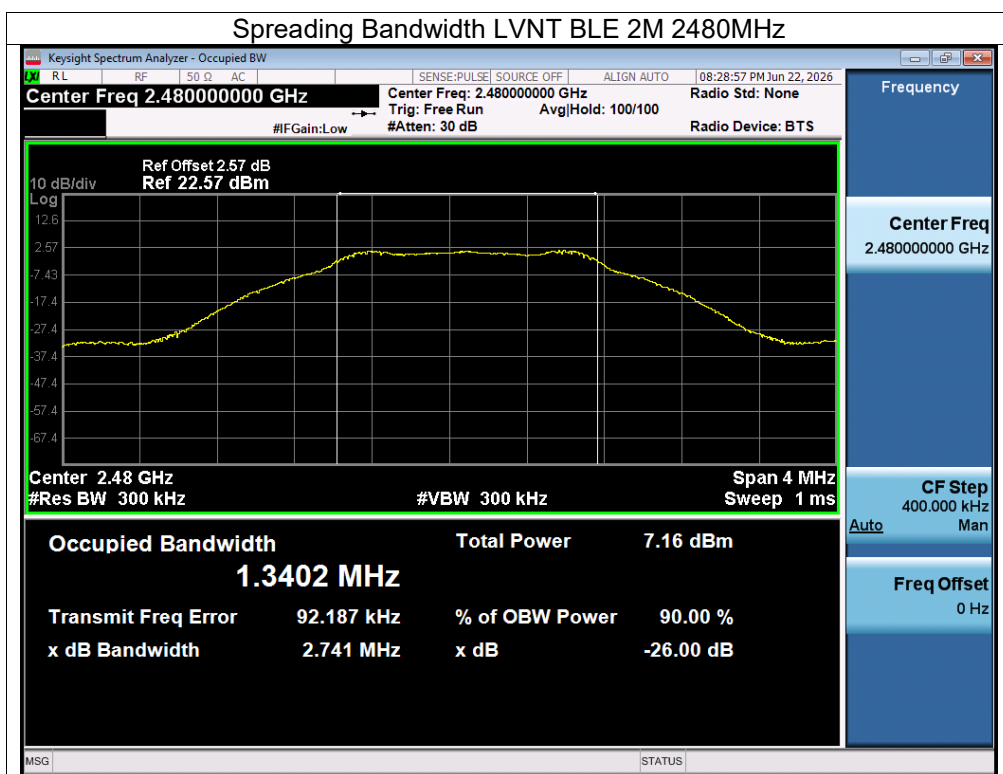

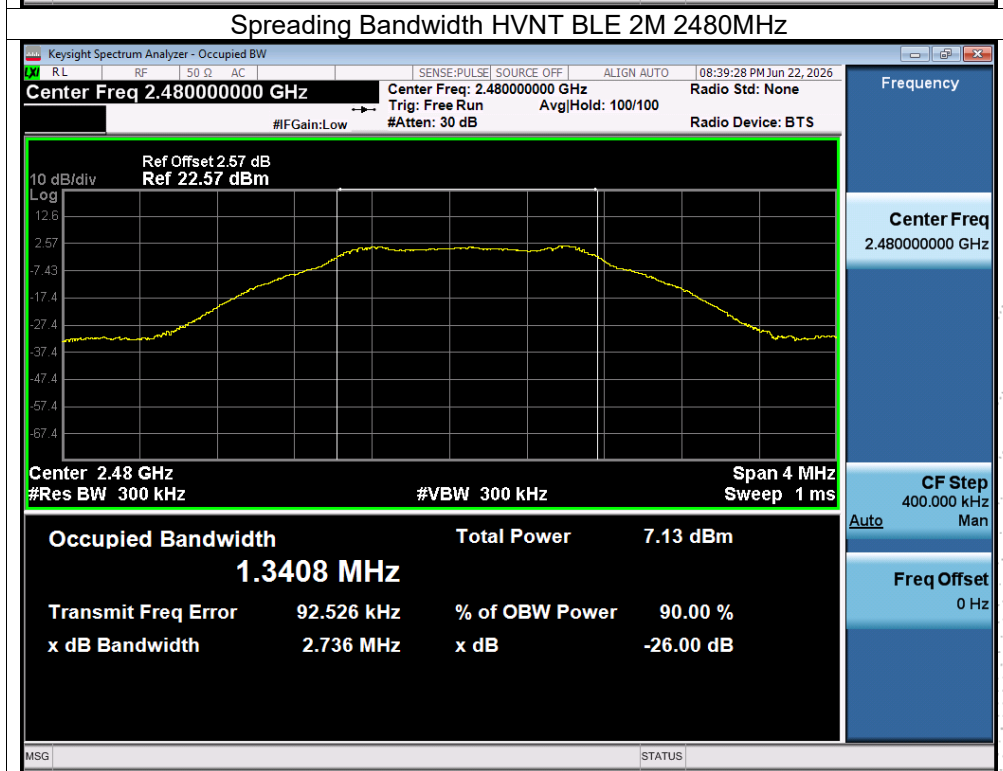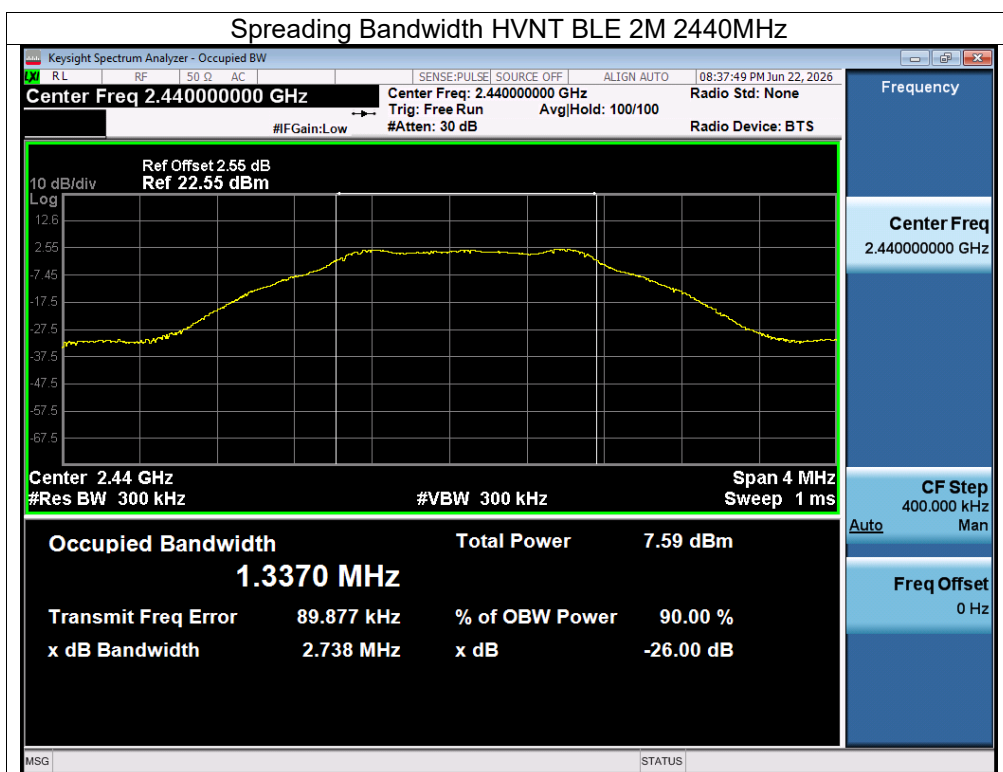

10. Unwanted Emission Intensity Measurement

10.1 Block Diagram Of Test Setup

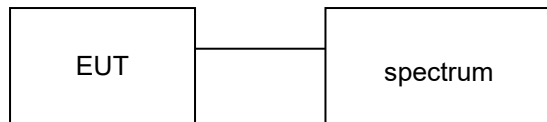

10.2 Limit

Item	RB / VB	Limits
TX Spurious Emission	100KHz	$\leq 2.5 \mu\text{W/MHz}$ (-36dBm) ($30\text{MHz} \leq f \leq 1000\text{MHz}$)
	1 MHz	$\leq 2.5 \mu\text{W/MHz}$ (-26dBm) ($1000\text{MHz} < f \leq 2387\text{MHz}$)
	1 MHz	$\leq 25 \mu\text{W/MHz}$ (-16dBm) ($2387\text{MHz} < f \leq 2400\text{MHz}$)
	1 MHz	$\leq 25 \mu\text{W/MHz}$ (-16dBm) ($2483.5\text{MHz} \leq f < 2496.5\text{MHz}$)
	1 MHz	$\leq 2.5 \mu\text{W/MHz}$ (-26dBm) ($2496.5\text{MHz} \leq f < 12500\text{MHz}$)

10.3 Measuring Instruments And Setting

Please refer to section 5 in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
RB / VB	1 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

10.4 Test procedure

1. EUT have transmitted the maximum modulation signal and fixed channelize.
2. Setting of SA is following as: Below 1GHz RB:100KHz / VB:100KHz
Above 1GHz RB:1MHz / VB:1MHz / AT: 20dB Ref: 10dBm / Sweep time: Auto
Sweep Mode: Continuous sweep / Detect mode: Positive peak
Trace mode: Max hold
3. Setting of SA is following as 30MHz and stop frequency 1000MHz Then to mark peak reading value + cable loss shall be less than $0.25 \mu\text{W/MHz}$.
4. Setting of SA is following as 1000MHz and stop frequency 2387MHz Then to mark peak reading value + cable loss shall be less than $2.5 \mu\text{W/MHz}$.
5. SA adjusted to start frequency 2387MHz and stop frequency 2400MHz. Then to mark peak reading value + cable loss shall be less than $25 \mu\text{W/MHz}$.
6. SA adjusted to start frequency 2483.5MHz and stop frequency 2496.5MHz Then to mark peak reading value + cable loss shall be less than $25 \mu\text{W/MHz}$.
7. SA adjusted to start frequency 2496.5MHz and stop frequency 12500MHz Then to mark peak reading value + cable loss shall be less than $2.5 \mu\text{W/MHz}$.


10.5 Test Result



Temperature:	26°C		
Humidity:	54%RH	Test Voltage	DC 3.7V



Condition	Mode	Frequency (MHz)	Range (MHz)	Emission Frequency (MHz)	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	30-1000	911.73	-61.45	-36	Pass
NVNT	BLE 1M	2402	1000-2387	2378.68	-54.21	-26	Pass
NVNT	BLE 1M	2402	2387-2400	2399.99	-35.18	-16	Pass
NVNT	BLE 1M	2402	2483.5-2496.5	2484.06	-56.64	-16	Pass
NVNT	BLE 1M	2402	2496.5-13000	5185.4	-43.44	-26	Pass
NVNT	BLE 1M	2440	30-1000	911.73	-49.99	-36	Pass
NVNT	BLE 1M	2440	1000-2387	1984.77	-56.72	-26	Pass
NVNT	BLE 1M	2440	2387-2400	2392.08	-54.94	-16	Pass
NVNT	BLE 1M	2440	2483.5-2496.5	2487.54	-55.74	-16	Pass
NVNT	BLE 1M	2440	2496.5-13000	5185.4	-42.53	-26	Pass
NVNT	BLE 1M	2480	30-1000	911.73	-68.21	-36	Pass
NVNT	BLE 1M	2480	1000-2387	2359.26	-55.99	-26	Pass
NVNT	BLE 1M	2480	2387-2400	2387.82	-57.14	-16	Pass
NVNT	BLE 1M	2480	2483.5-2496.5	2483.53	-50.3	-16	Pass
NVNT	BLE 1M	2480	2496.5-13000	5185.4	-45.11	-26	Pass
LVNT	BLE 1M	2402	30-1000	979.63	-68.1	-36	Pass
LVNT	BLE 1M	2402	1000-2387	2378.68	-53.17	-26	Pass
LVNT	BLE 1M	2402	2387-2400	2400	-36.8	-16	Pass
LVNT	BLE 1M	2402	2483.5-2496.5	2493.15	-56.83	-16	Pass
LVNT	BLE 1M	2402	2496.5-13000	5311.44	-40.29	-26	Pass
LVNT	BLE 1M	2440	30-1000	832.19	-67.7	-36	Pass
LVNT	BLE 1M	2440	1000-2387	1846.07	-56.98	-26	Pass
LVNT	BLE 1M	2440	2387-2400	2392.46	-56.65	-16	Pass
LVNT	BLE 1M	2440	2483.5-2496.5	2487.39	-56.17	-16	Pass
LVNT	BLE 1M	2440	2496.5-13000	5258.92	-34.53	-26	Pass
LVNT	BLE 1M	2480	30-1000	781.75	-67.08	-36	Pass
LVNT	BLE 1M	2480	1000-2387	2216.4	-56.09	-26	Pass
LVNT	BLE 1M	2480	2387-2400	2391.58	-55.54	-16	Pass
LVNT	BLE 1M	2480	2483.5-2496.5	2483.72	-50.89	-16	Pass
LVNT	BLE 1M	2480	2496.5-13000	4964.82	-46.29	-26	Pass
HVNT	BLE 1M	2402	30-1000	910.76	-68.55	-36	Pass
HVNT	BLE 1M	2402	1000-2387	2378.68	-53.29	-26	Pass
HVNT	BLE 1M	2402	2387-2400	2400	-36.52	-16	Pass
HVNT	BLE 1M	2402	2483.5-2496.5	2489.87	-56.97	-16	Pass
HVNT	BLE 1M	2402	2496.5-13000	5258.92	-33.35	-26	Pass
HVNT	BLE 1M	2440	30-1000	880.69	-66.45	-36	Pass
HVNT	BLE 1M	2440	1000-2387	2380.07	-56.87	-26	Pass
HVNT	BLE 1M	2440	2387-2400	2391.81	-56.37	-16	Pass
HVNT	BLE 1M	2440	2483.5-2496.5	2488.06	-56.18	-16	Pass



HVNT	BLE 1M	2440	2496.5-13000	5279.93	-42.71	-26	Pass
HVNT	BLE 1M	2480	30-1000	845.77	-67.55	-36	Pass
HVNT	BLE 1M	2480	1000-2387	2047.19	-56.91	-26	Pass
HVNT	BLE 1M	2480	2387-2400	2393.68	-56.99	-16	Pass
HVNT	BLE 1M	2480	2483.5-2496.5	2483.82	-50.12	-16	Pass
HVNT	BLE 1M	2480	2496.5-13000	4964.82	-46.48	-26	Pass
NVNT	BLE 2M	2402	30-1000	895.24	-68.12	-36	Pass
NVNT	BLE 2M	2402	1000-2387	2378.68	-53.33	-26	Pass
NVNT	BLE 2M	2402	2387-2400	2400	-22.01	-16	Pass
NVNT	BLE 2M	2402	2483.5-2496.5	2492.26	-56.34	-16	Pass
NVNT	BLE 2M	2402	2496.5-13000	5216.91	-46.04	-26	Pass
NVNT	BLE 2M	2440	30-1000	909.79	-45.76	-36	Pass
NVNT	BLE 2M	2440	1000-2387	2362.03	-56.5	-26	Pass
NVNT	BLE 2M	2440	2387-2400	2392.24	-55.74	-16	Pass
NVNT	BLE 2M	2440	2483.5-2496.5	2487.65	-55.44	-16	Pass
NVNT	BLE 2M	2440	2496.5-13000	5185.4	-44.63	-26	Pass
NVNT	BLE 2M	2480	30-1000	904.94	-50.11	-36	Pass
NVNT	BLE 2M	2480	1000-2387	2352.32	-56.95	-26	Pass
NVNT	BLE 2M	2480	2387-2400	2390.03	-57.38	-16	Pass
NVNT	BLE 2M	2480	2483.5-2496.5	2483.72	-49.82	-16	Pass
NVNT	BLE 2M	2480	2496.5-13000	5185.4	-45.62	-26	Pass
LVNT	BLE 2M	2402	30-1000	906.88	-67.57	-36	Pass
LVNT	BLE 2M	2402	1000-2387	2378.68	-53.36	-26	Pass
LVNT	BLE 2M	2402	2387-2400	2400	-23.12	-16	Pass
LVNT	BLE 2M	2402	2483.5-2496.5	2487.56	-56.41	-16	Pass
LVNT	BLE 2M	2402	2496.5-13000	5258.92	-40.91	-26	Pass
LVNT	BLE 2M	2440	30-1000	940.83	-68.18	-36	Pass
LVNT	BLE 2M	2440	1000-2387	2317.65	-56.94	-26	Pass
LVNT	BLE 2M	2440	2387-2400	2391.95	-56.91	-16	Pass
LVNT	BLE 2M	2440	2483.5-2496.5	2494.06	-55.73	-16	Pass
LVNT	BLE 2M	2440	2496.5-13000	5164.39	-38.85	-26	Pass
LVNT	BLE 2M	2480	30-1000	721.61	-63.14	-36	Pass
LVNT	BLE 2M	2480	1000-2387	2249.69	-56.56	-26	Pass
LVNT	BLE 2M	2480	2387-2400	2390.21	-57.21	-16	Pass
LVNT	BLE 2M	2480	2483.5-2496.5	2483.54	-47.94	-16	Pass
LVNT	BLE 2M	2480	2496.5-13000	5258.92	-42.19	-26	Pass
HVNT	BLE 2M	2402	30-1000	806.97	-68.08	-36	Pass
HVNT	BLE 2M	2402	1000-2387	2378.68	-53.85	-26	Pass
HVNT	BLE 2M	2402	2387-2400	2400	-22.86	-16	Pass
HVNT	BLE 2M	2402	2483.5-2496.5	2495.72	-56.35	-16	Pass
HVNT	BLE 2M	2402	2496.5-13000	4807.27	-45.28	-26	Pass
HVNT	BLE 2M	2440	30-1000	897.18	-59.04	-36	Pass
HVNT	BLE 2M	2440	1000-2387	1933.45	-40.54	-26	Pass
HVNT	BLE 2M	2440	2387-2400	2391.88	-56.02	-16	Pass
HVNT	BLE 2M	2440	2483.5-2496.5	2488.08	-56.03	-16	Pass
HVNT	BLE 2M	2440	2496.5-13000	4880.79	-45.58	-26	Pass
HVNT	BLE 2M	2480	30-1000	898.15	-61.44	-36	Pass
HVNT	BLE 2M	2480	1000-2387	1765.62	-51.65	-26	Pass
HVNT	BLE 2M	2480	2387-2400	2392.56	-56.56	-16	Pass
HVNT	BLE 2M	2480	2483.5-2496.5	2483.55	-47.48	-16	Pass
HVNT	BLE 2M	2480	2496.5-13000	4964.82	-47.35	-26	Pass

When the RB=100kHz, RB factor = $10\log(RB_0/RB_1) = 10\log(1M/100K) = 10\text{dB}$


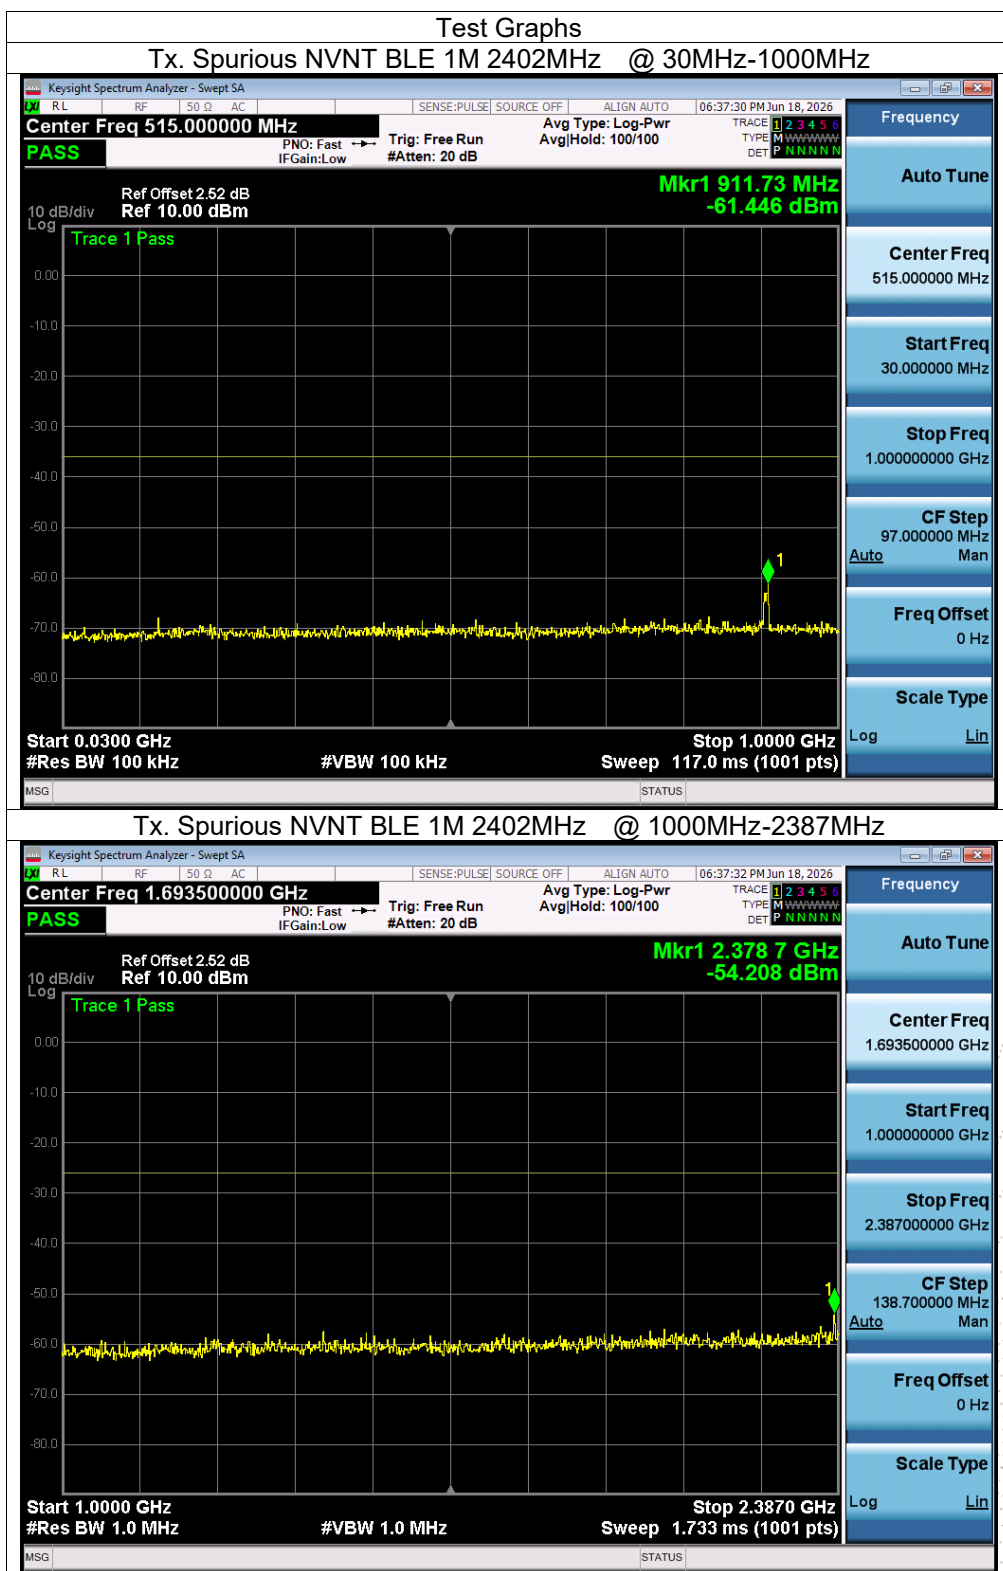


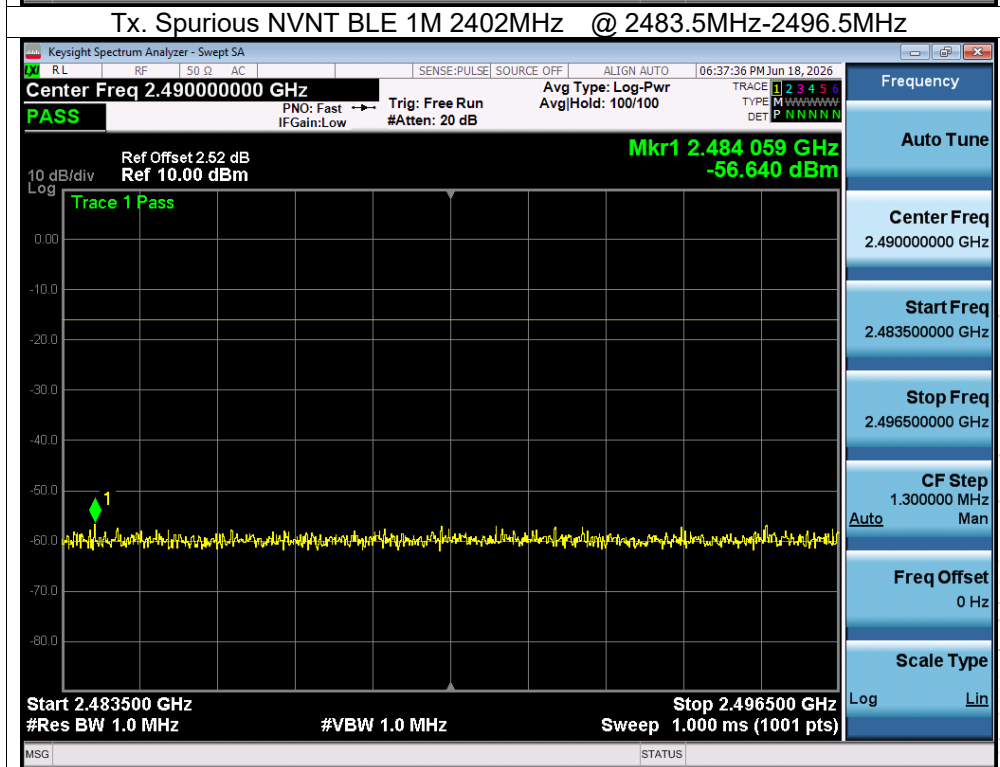
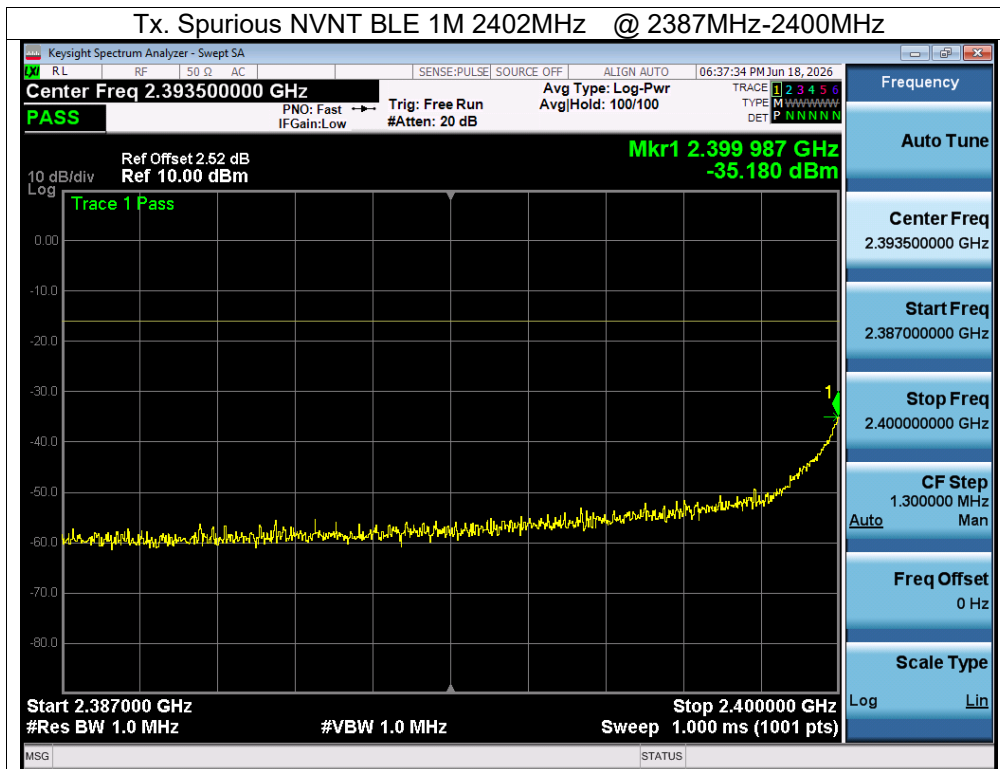


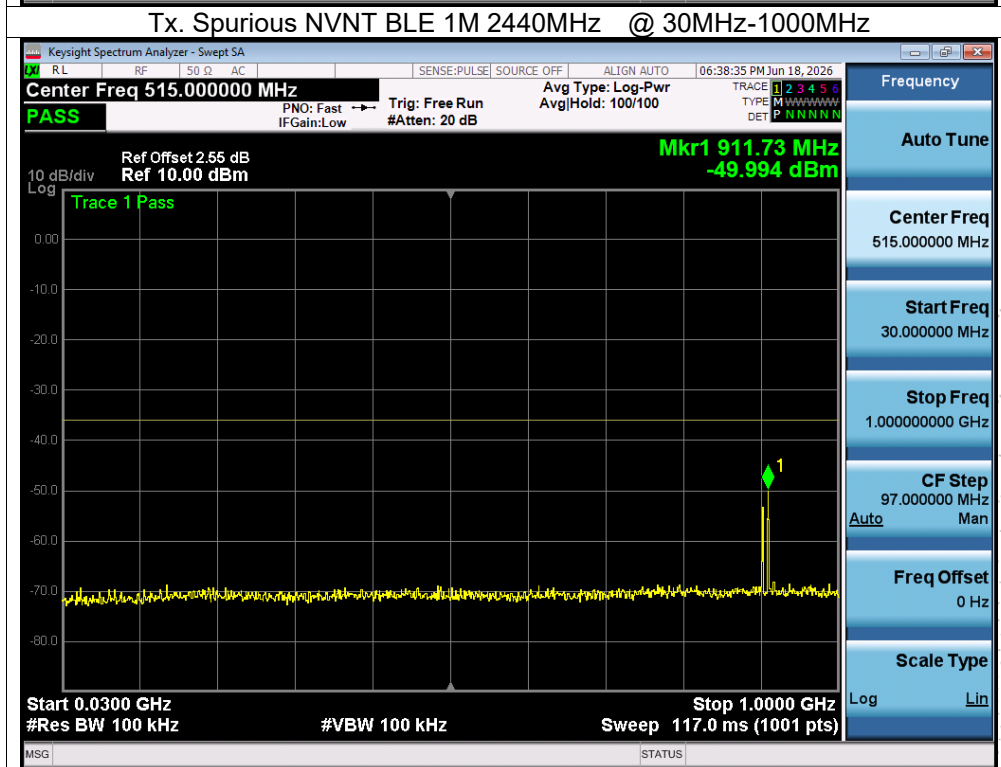
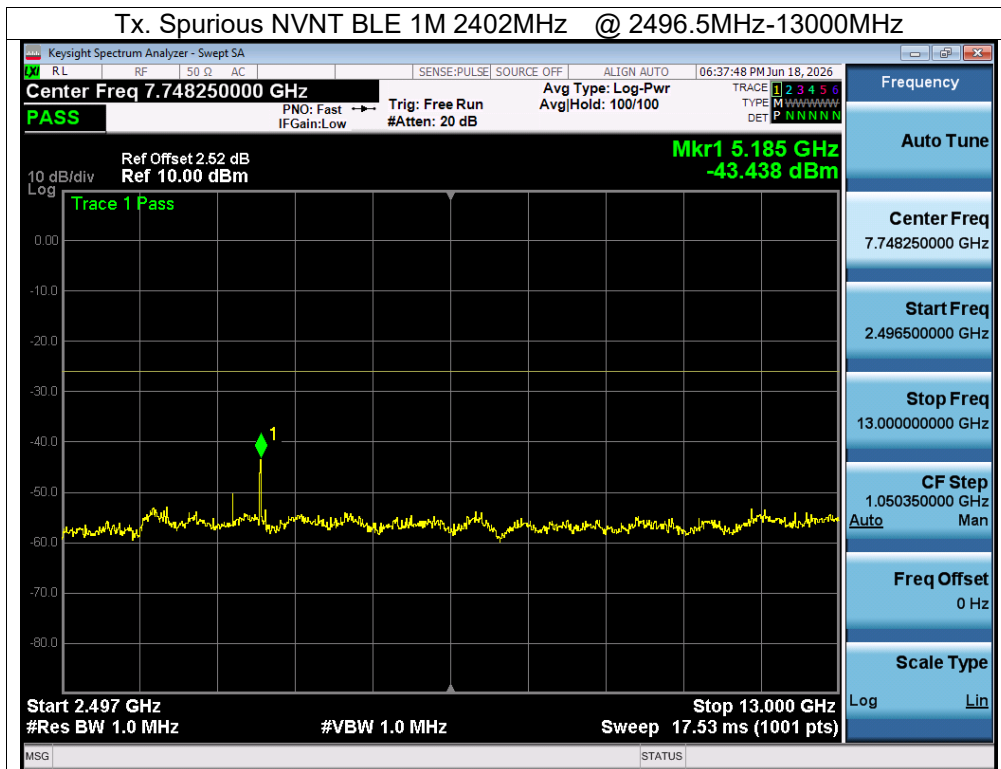


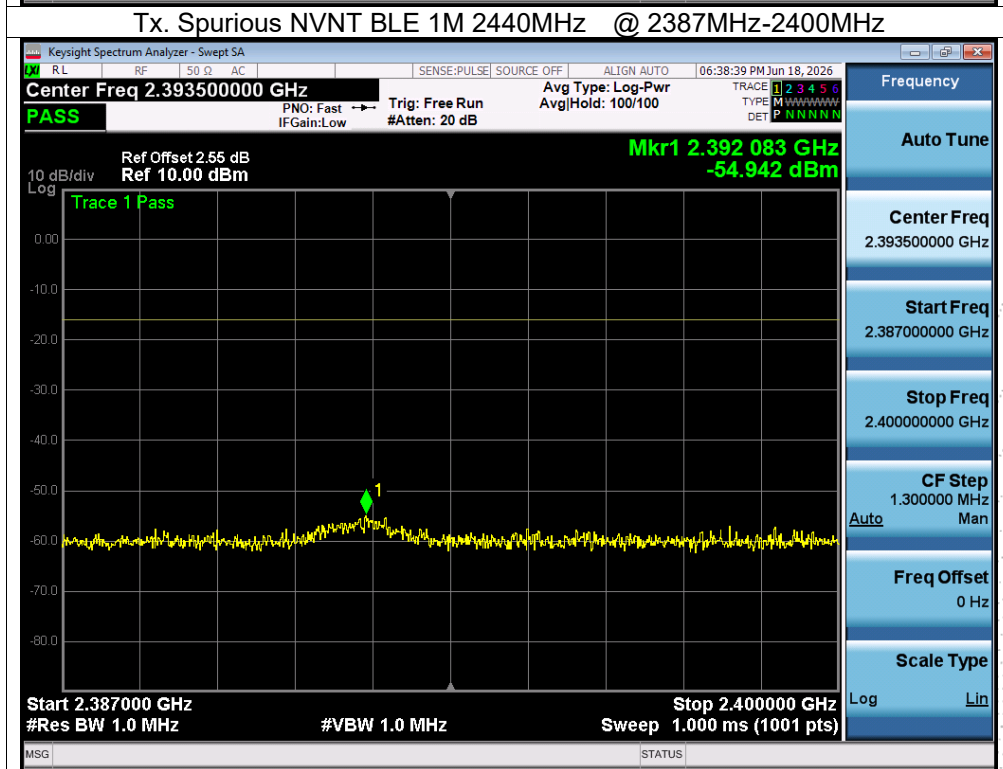
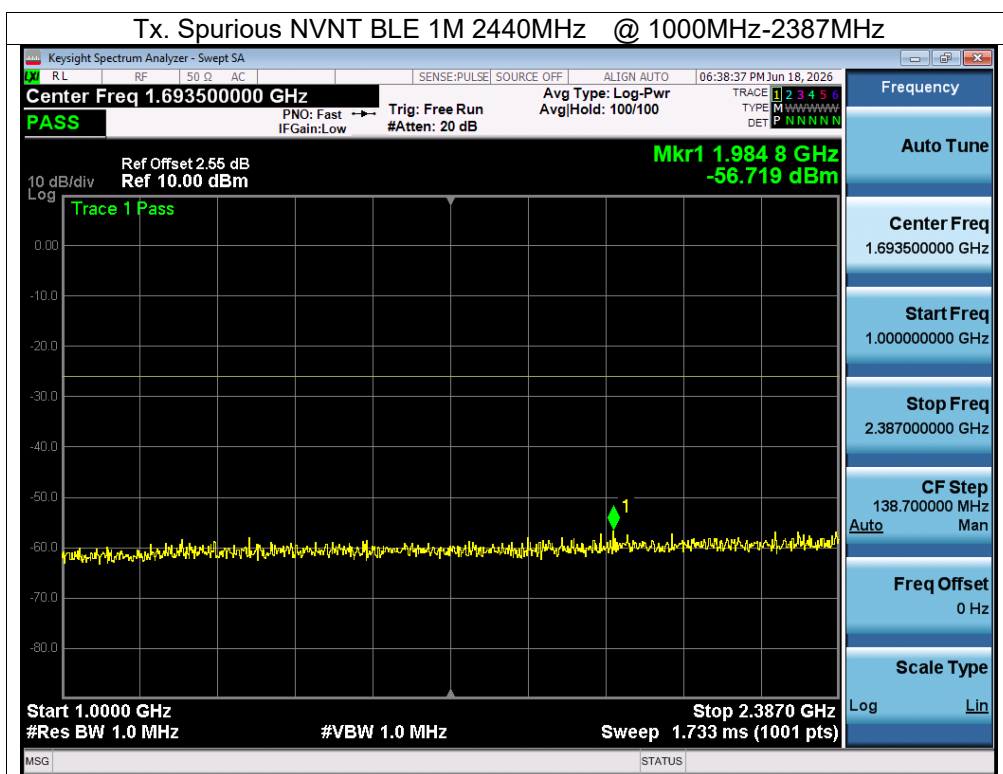




CO. LTD

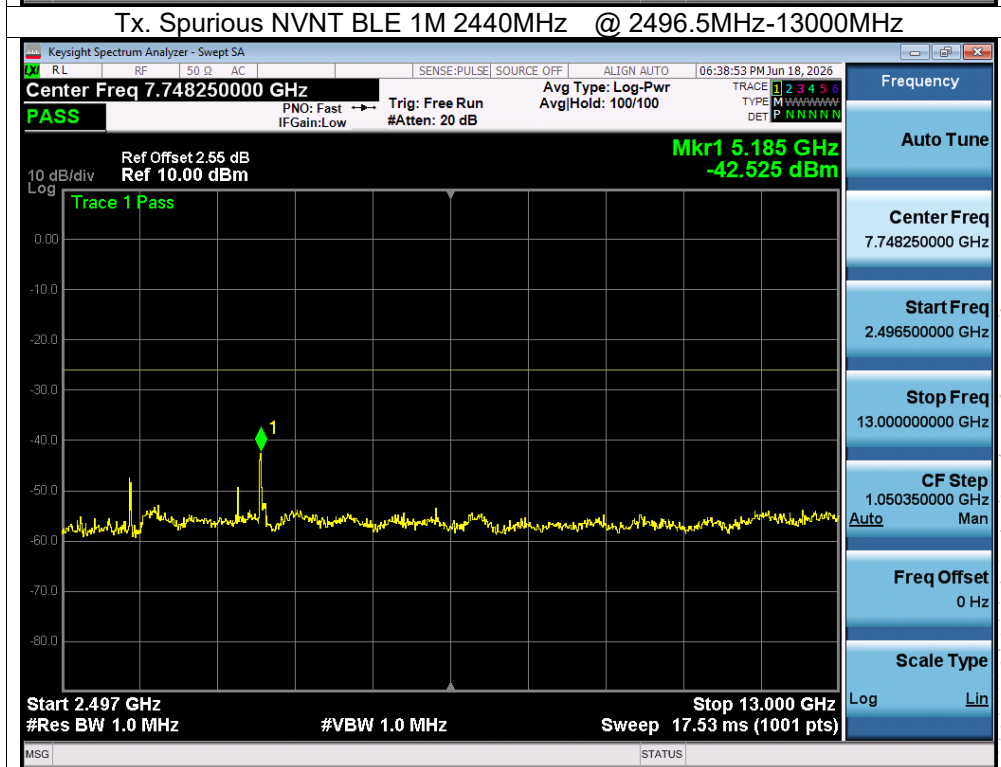
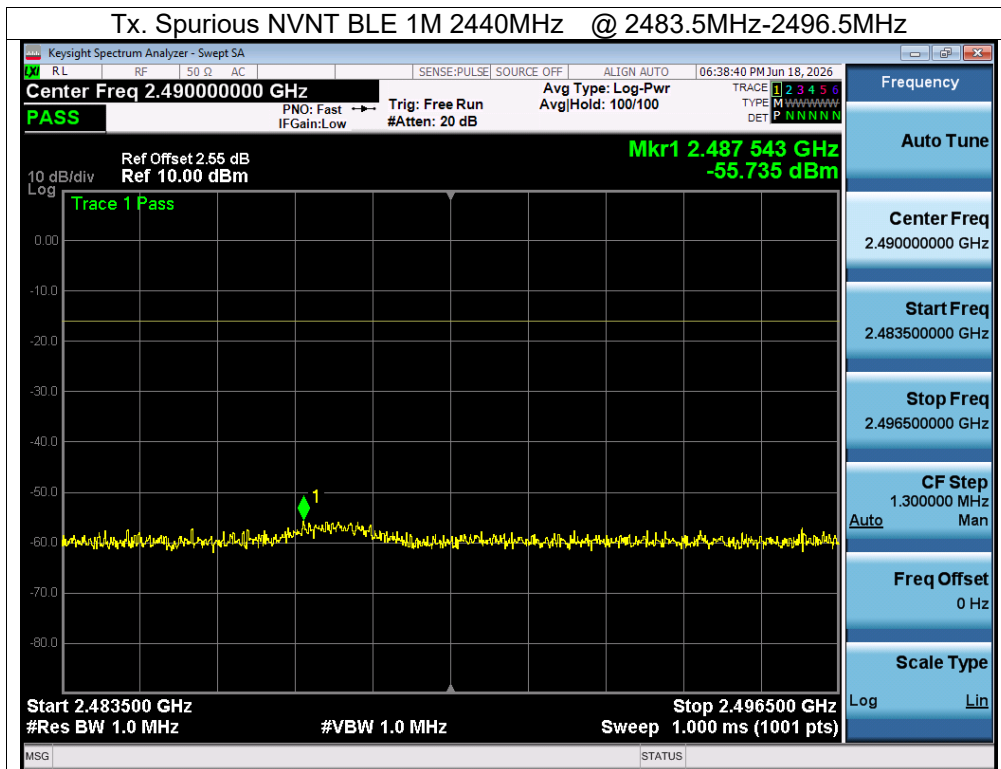


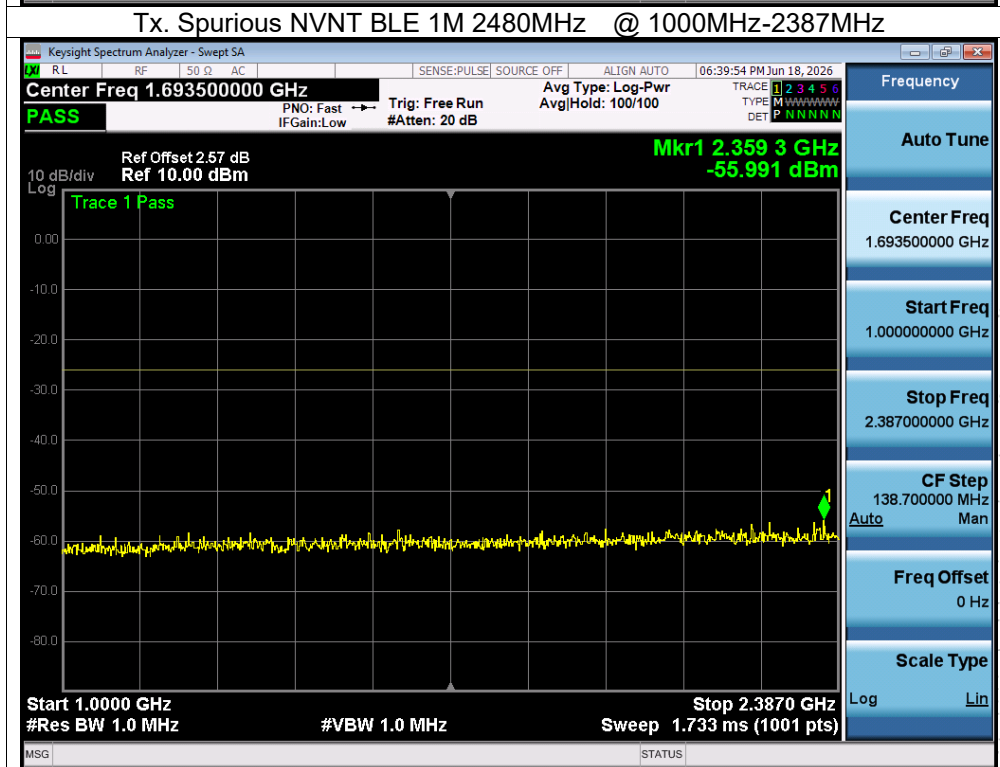
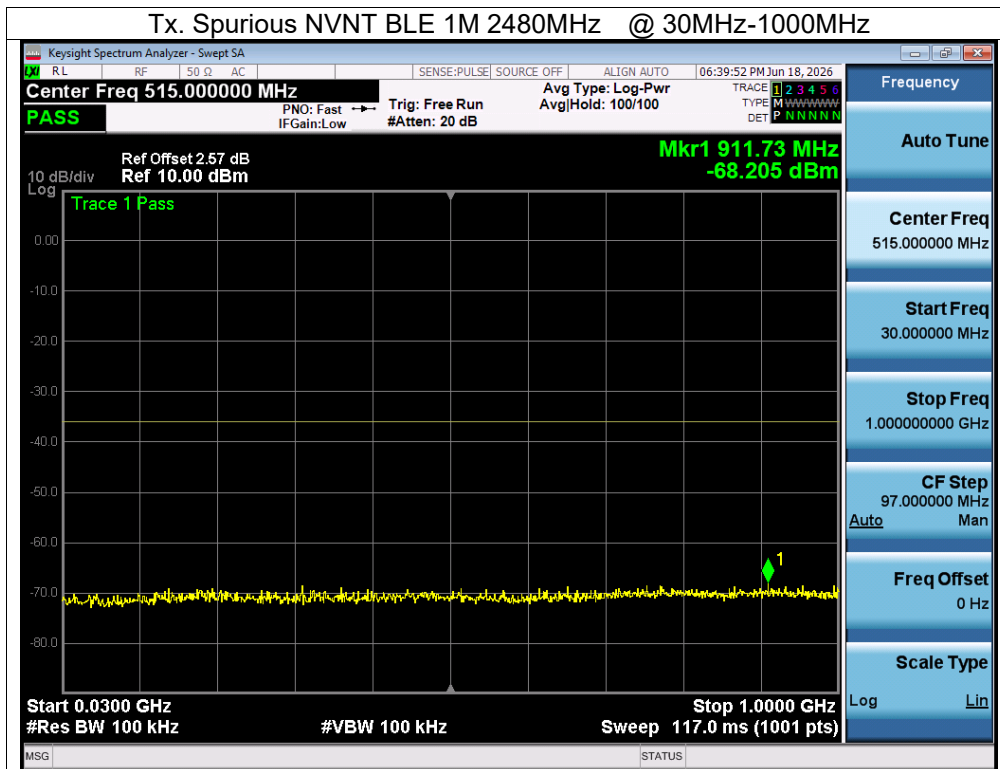


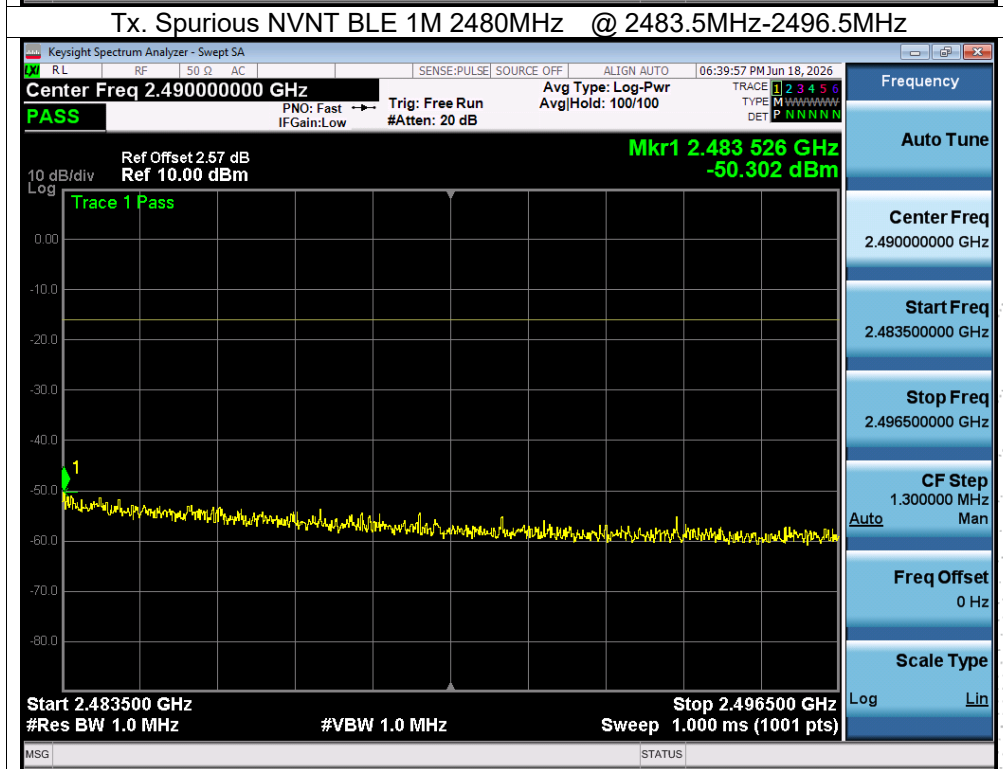
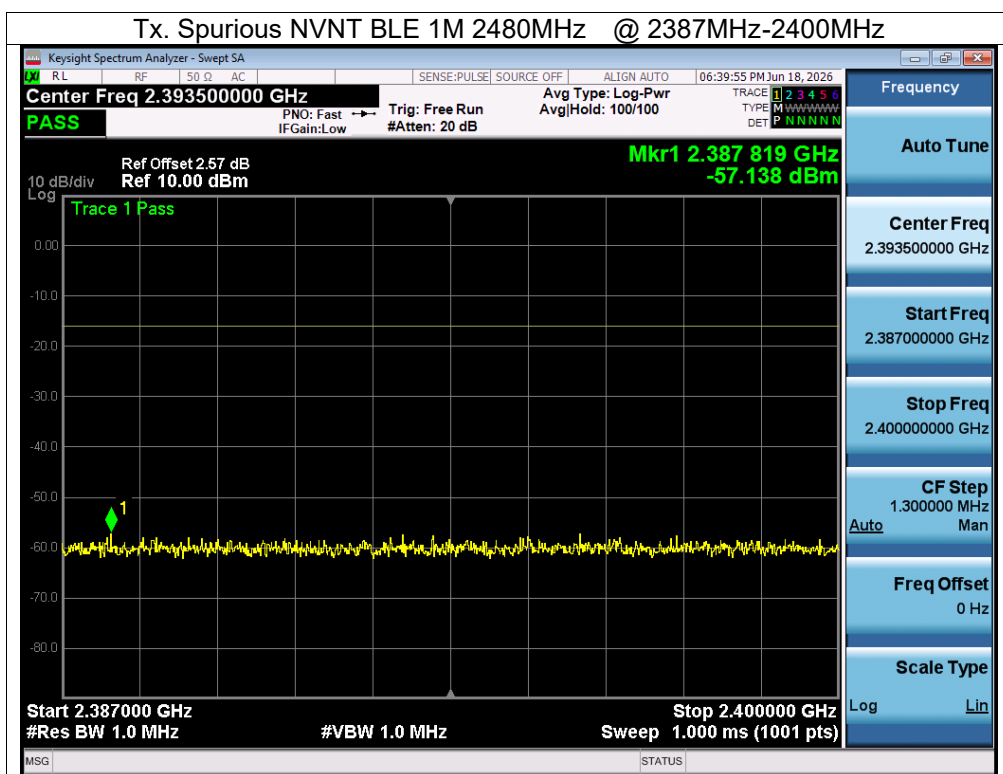


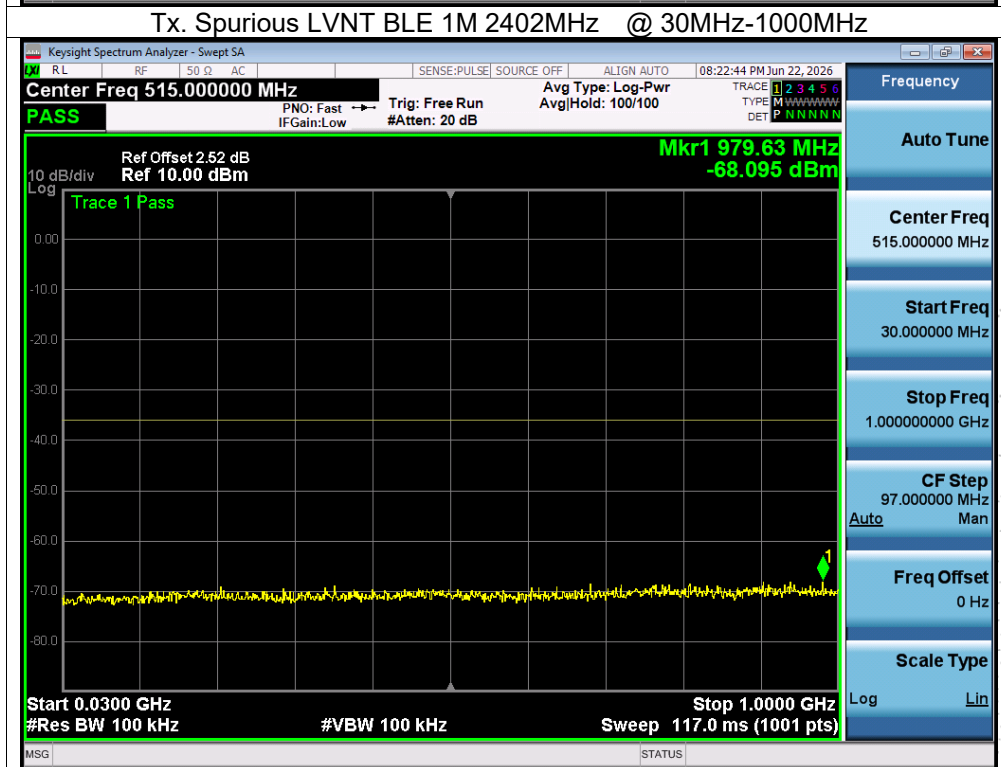
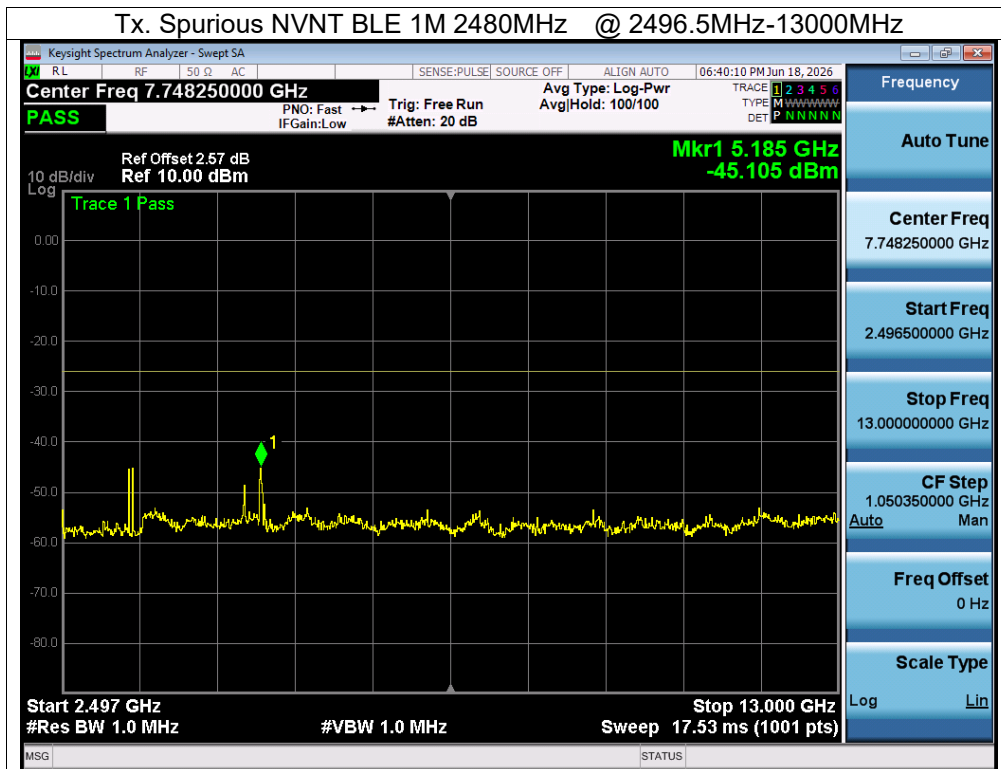


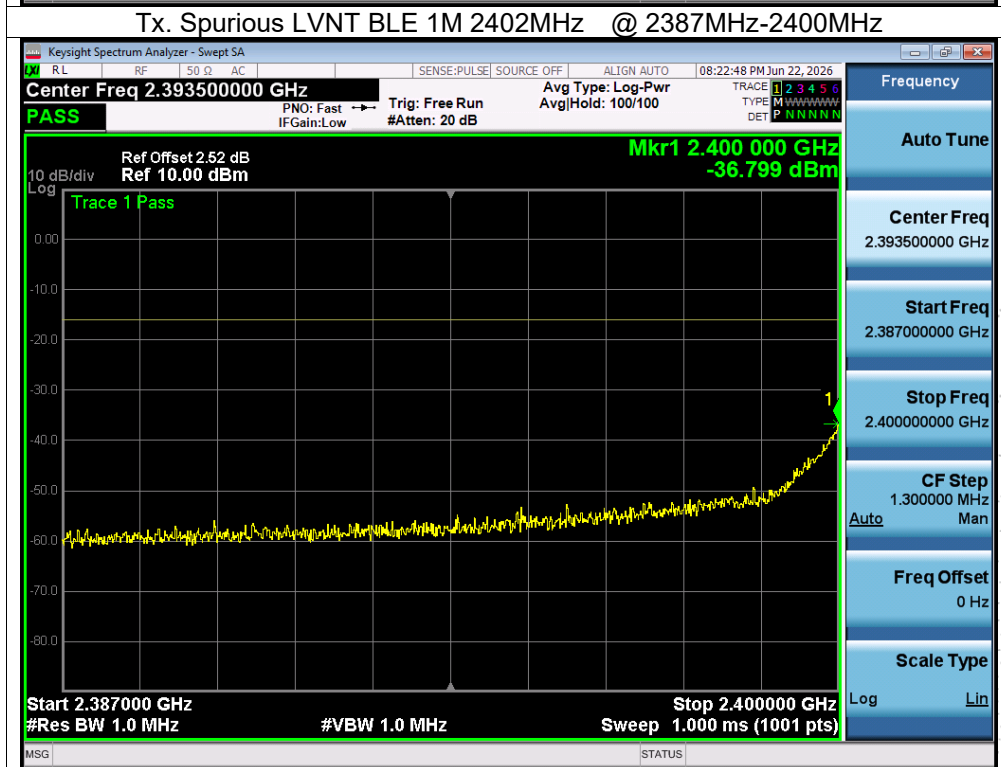
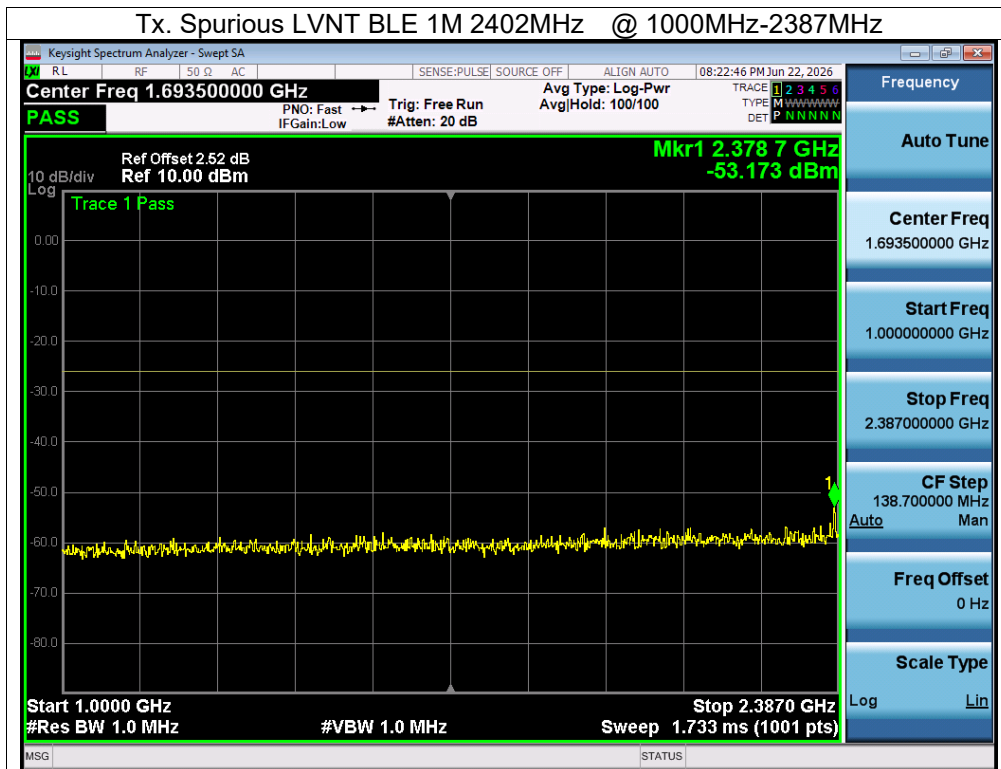


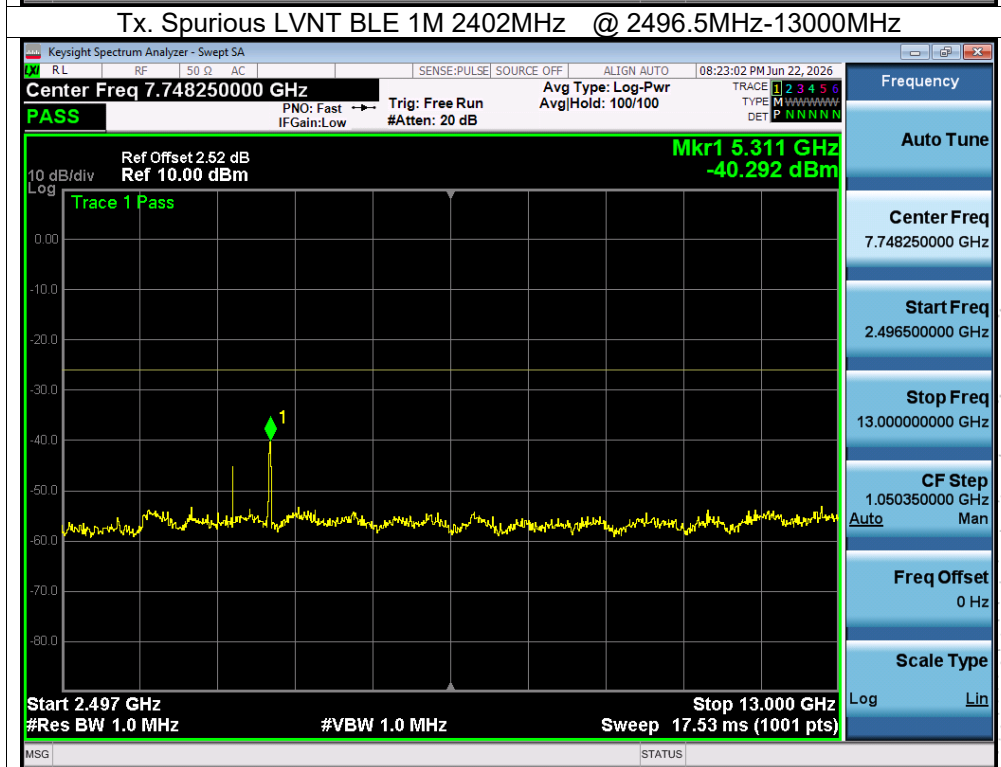
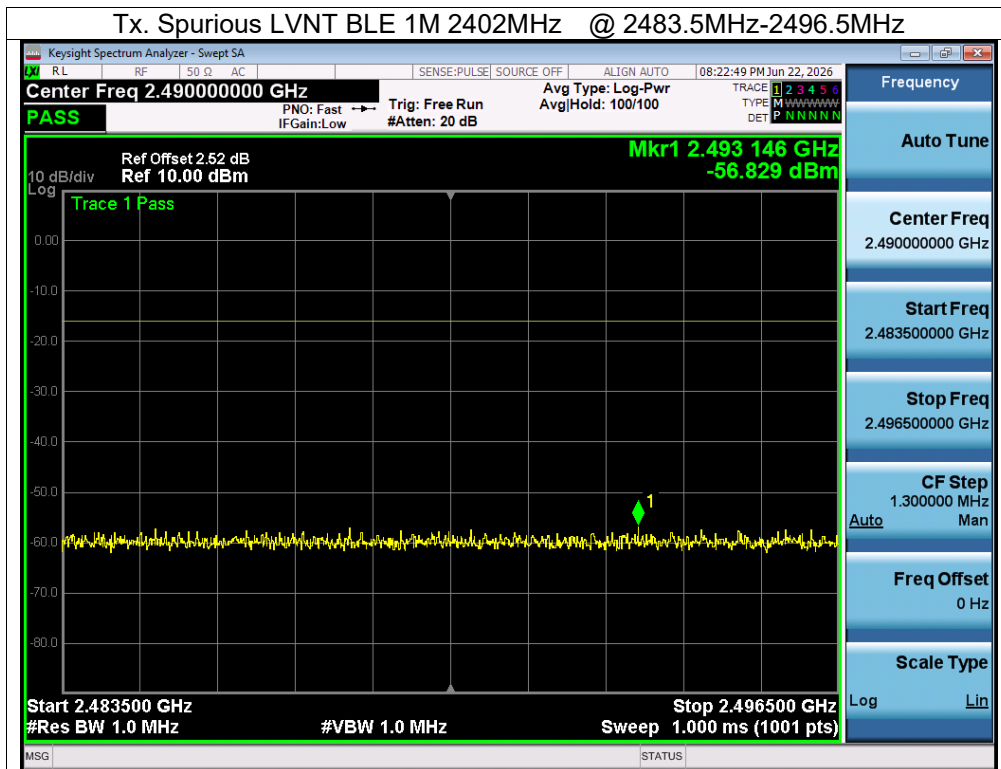


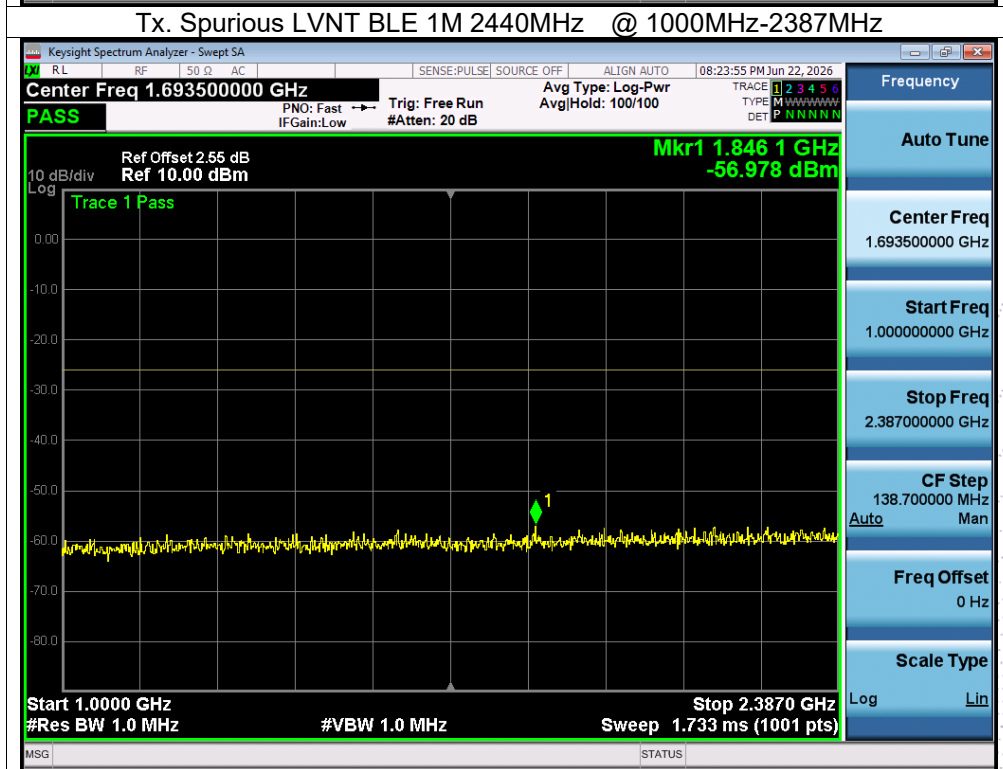
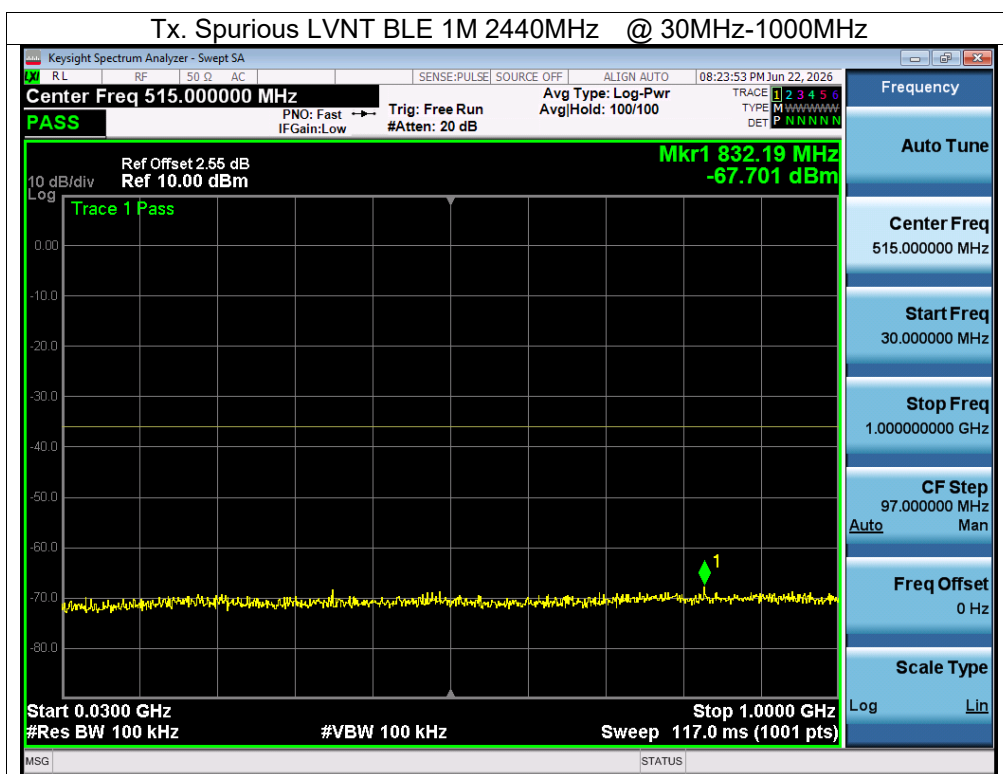


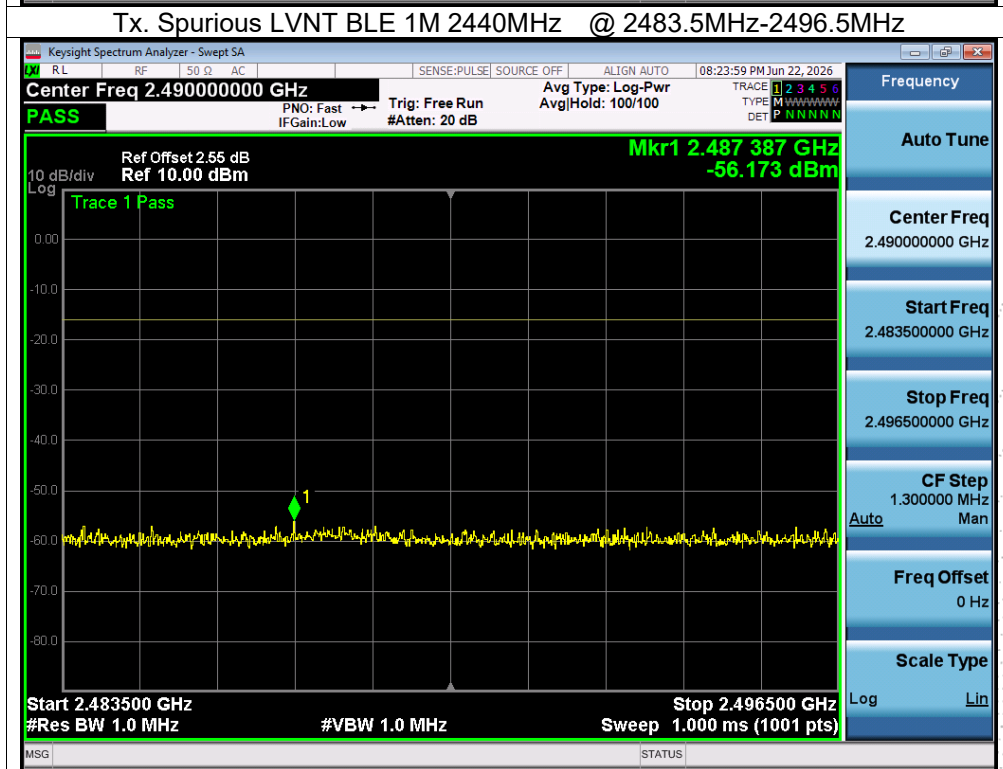
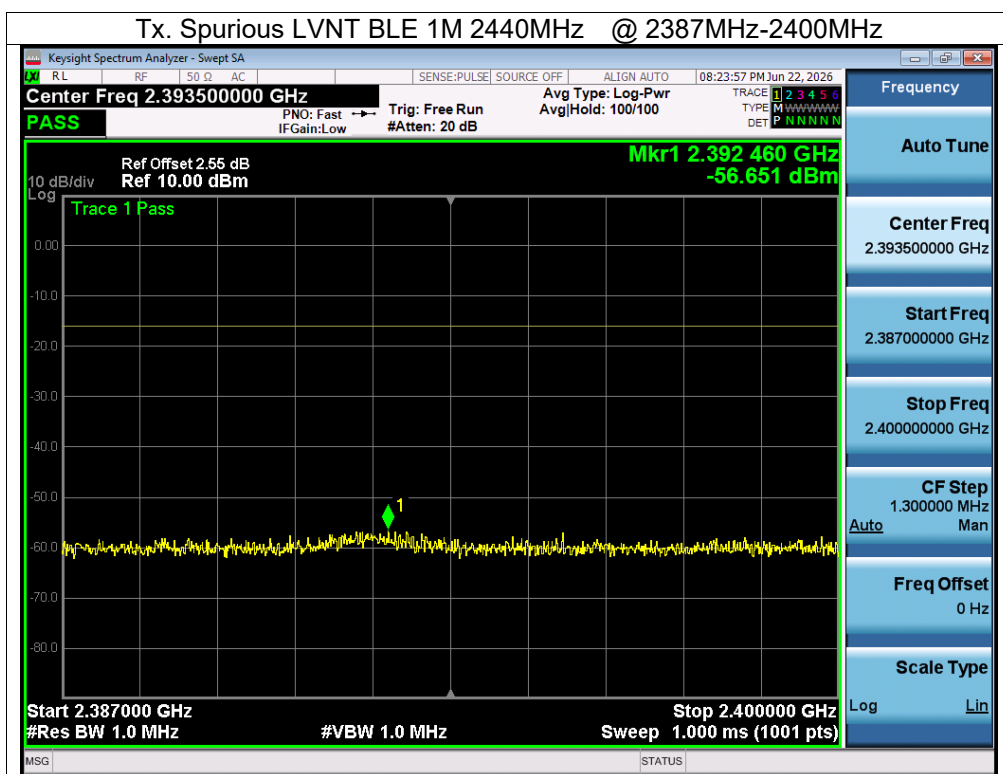


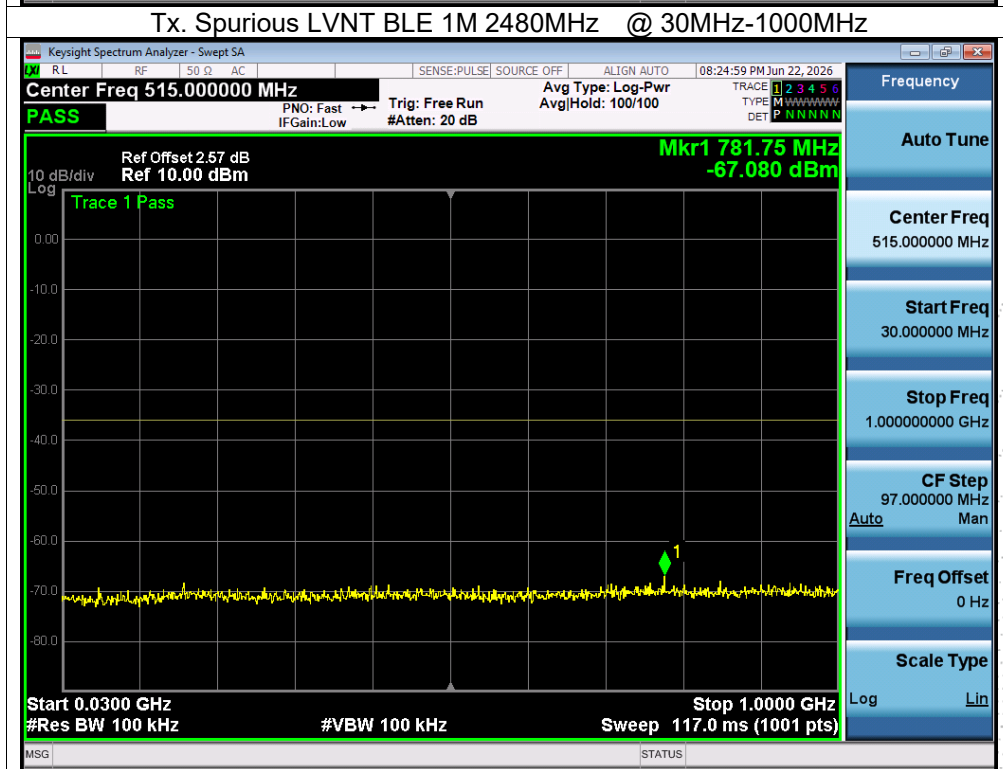
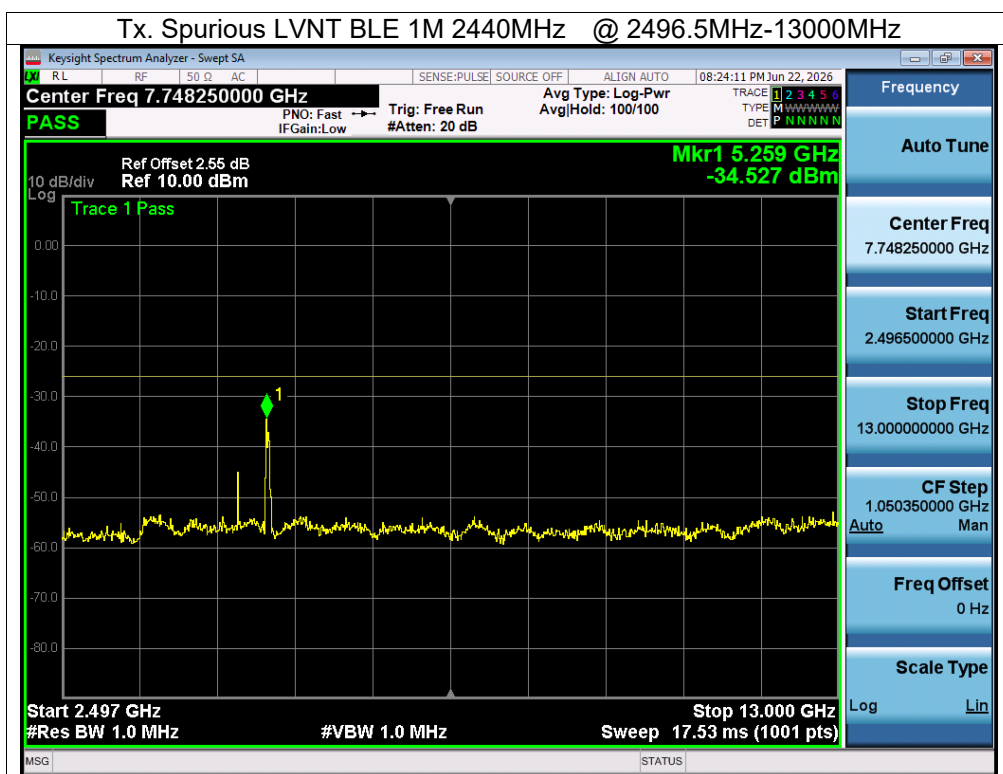


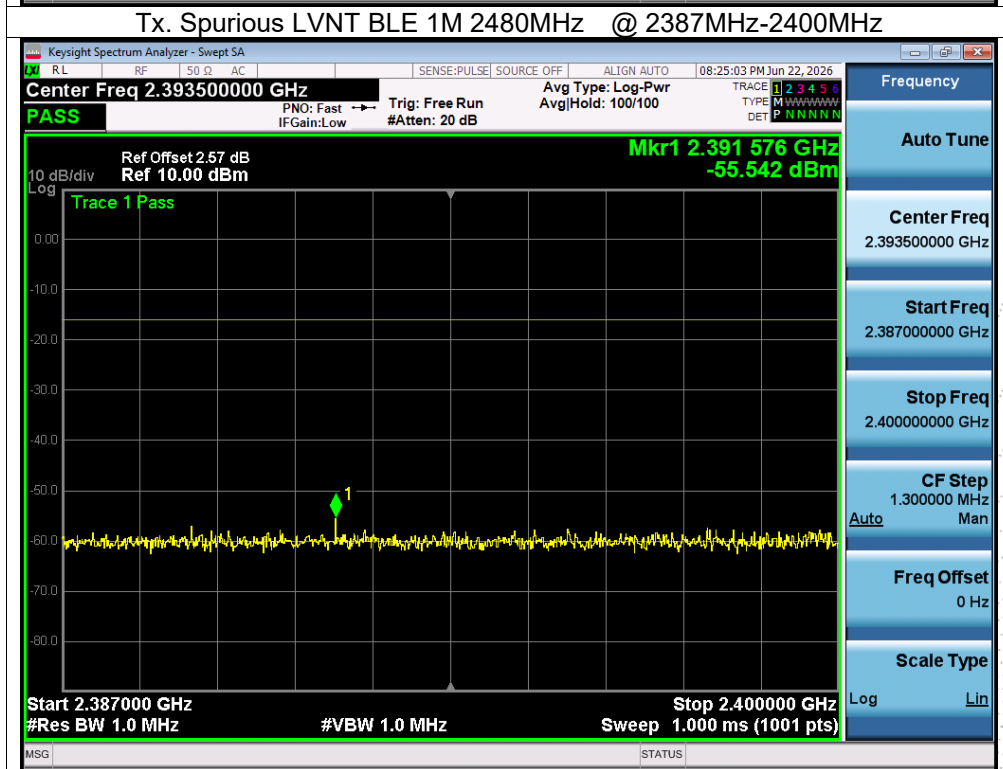
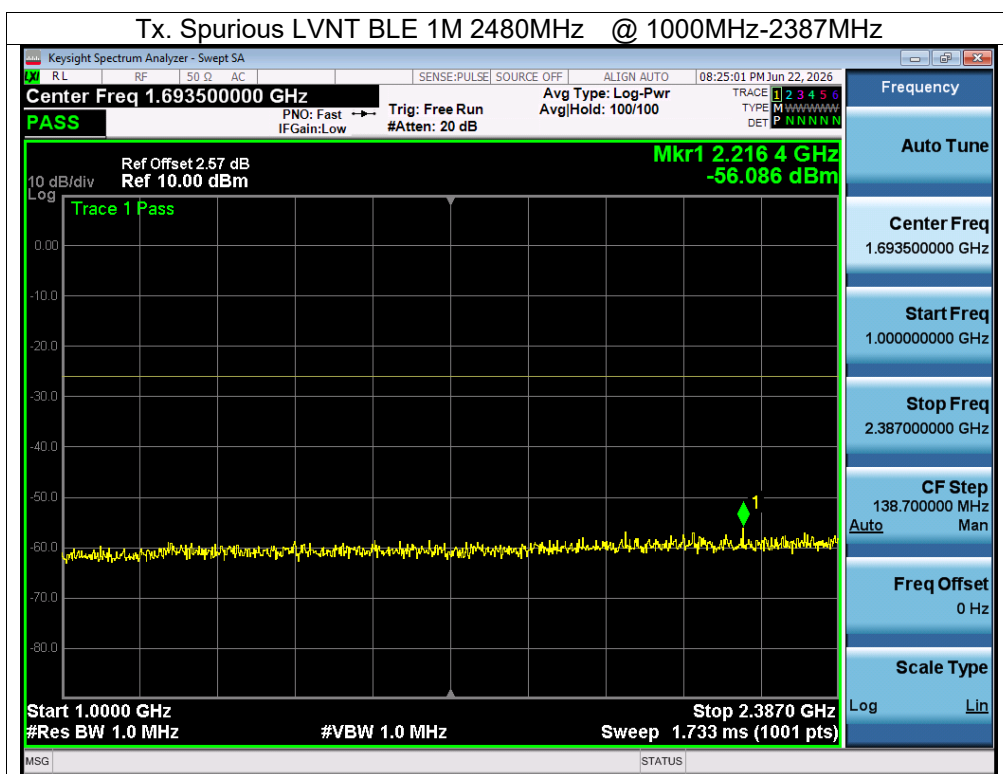


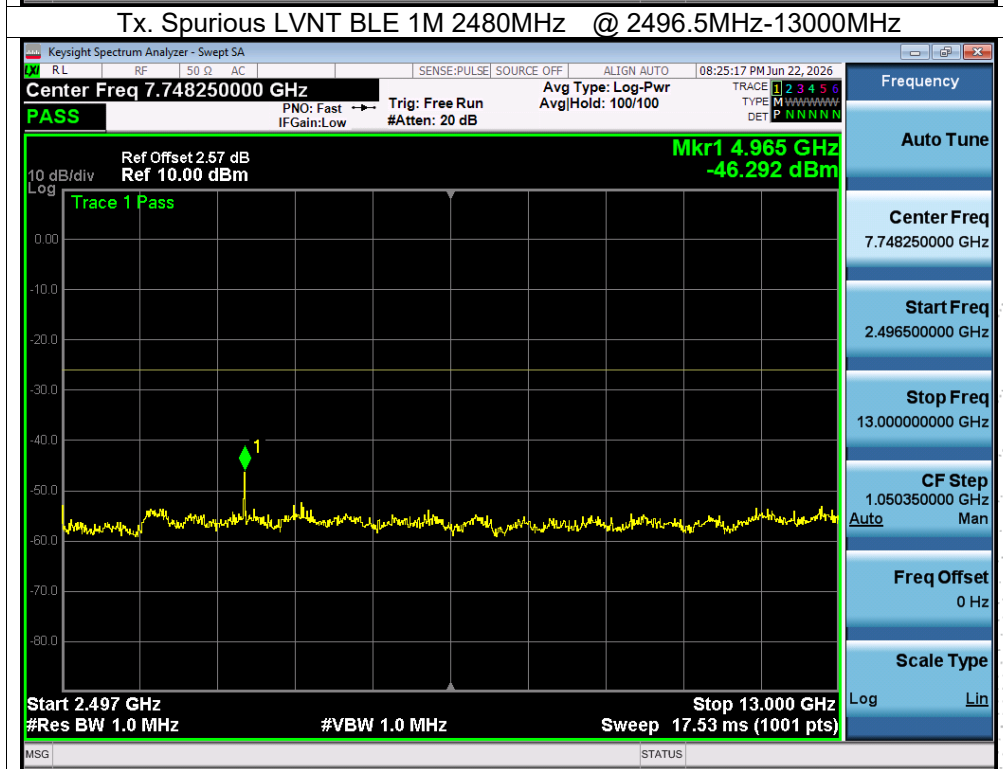
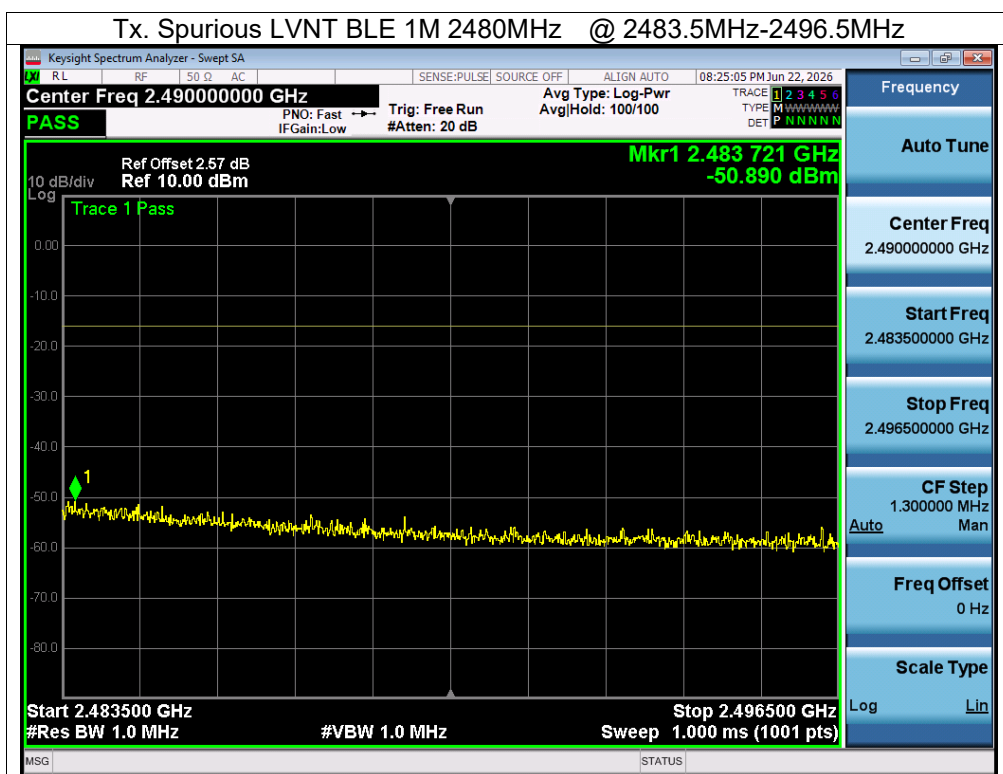


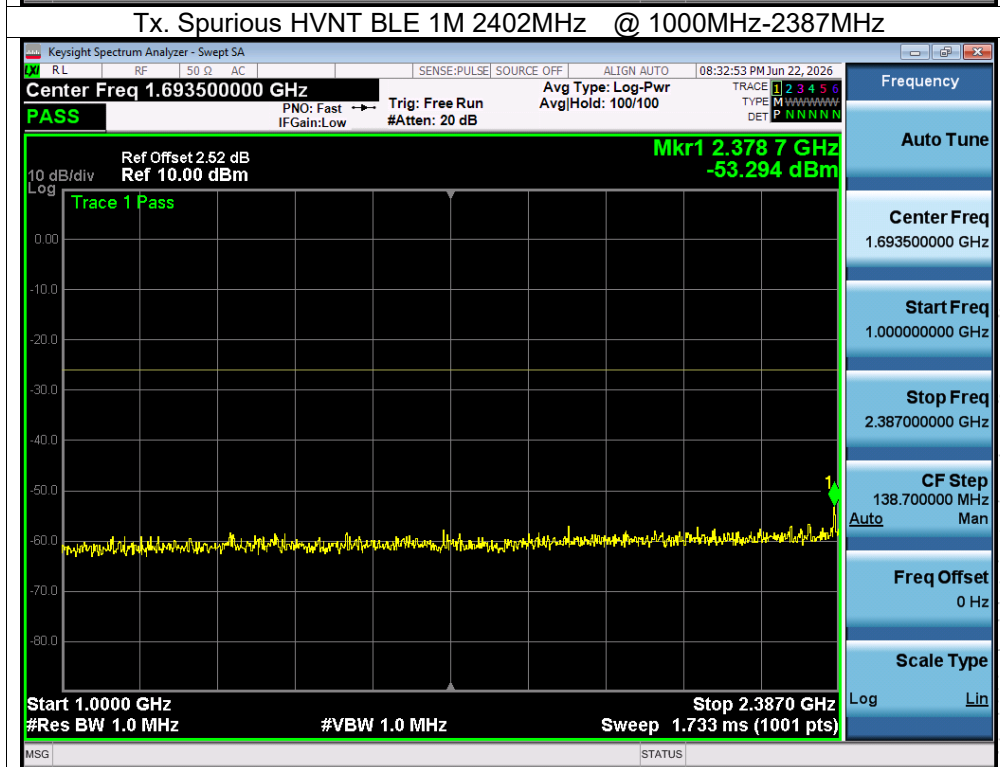
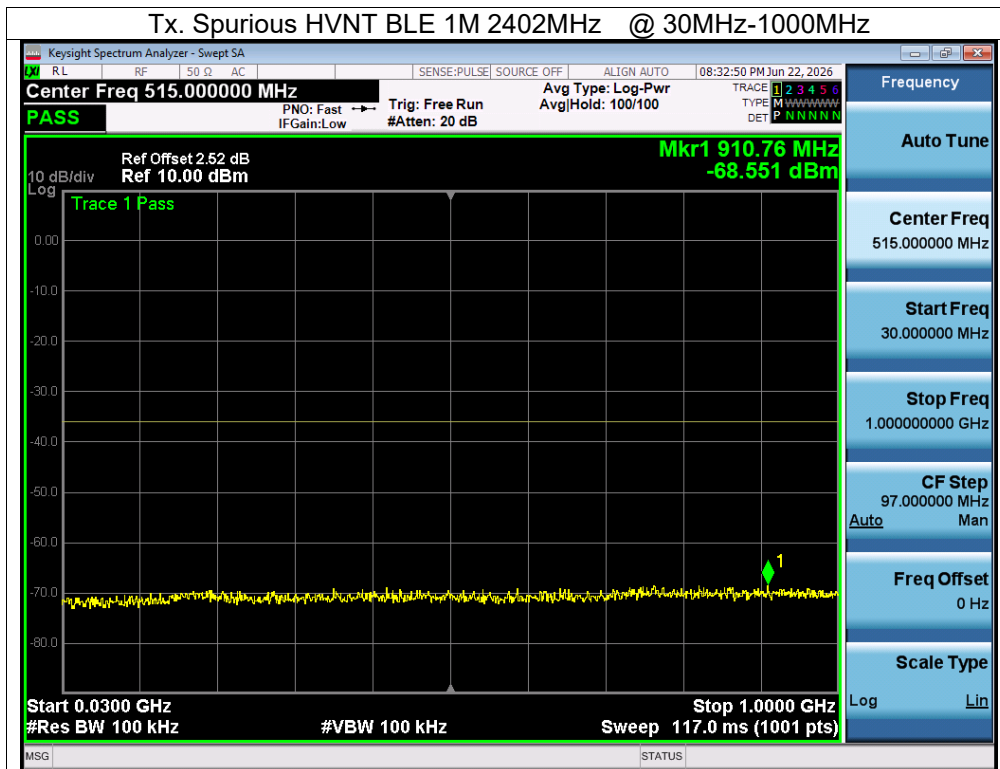


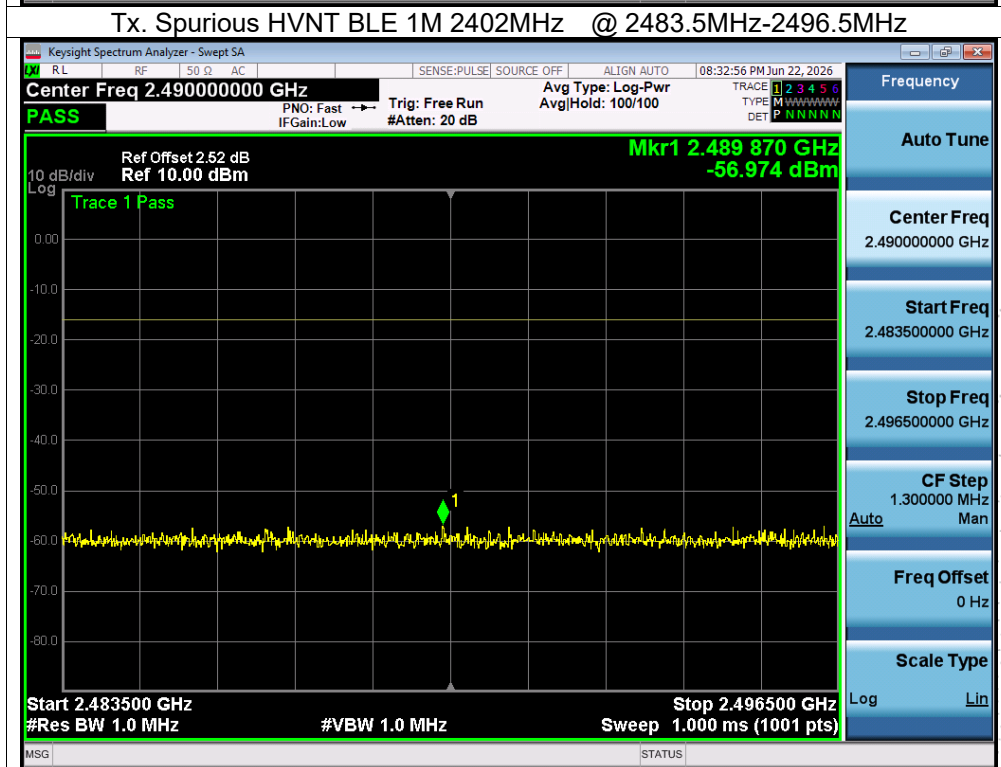
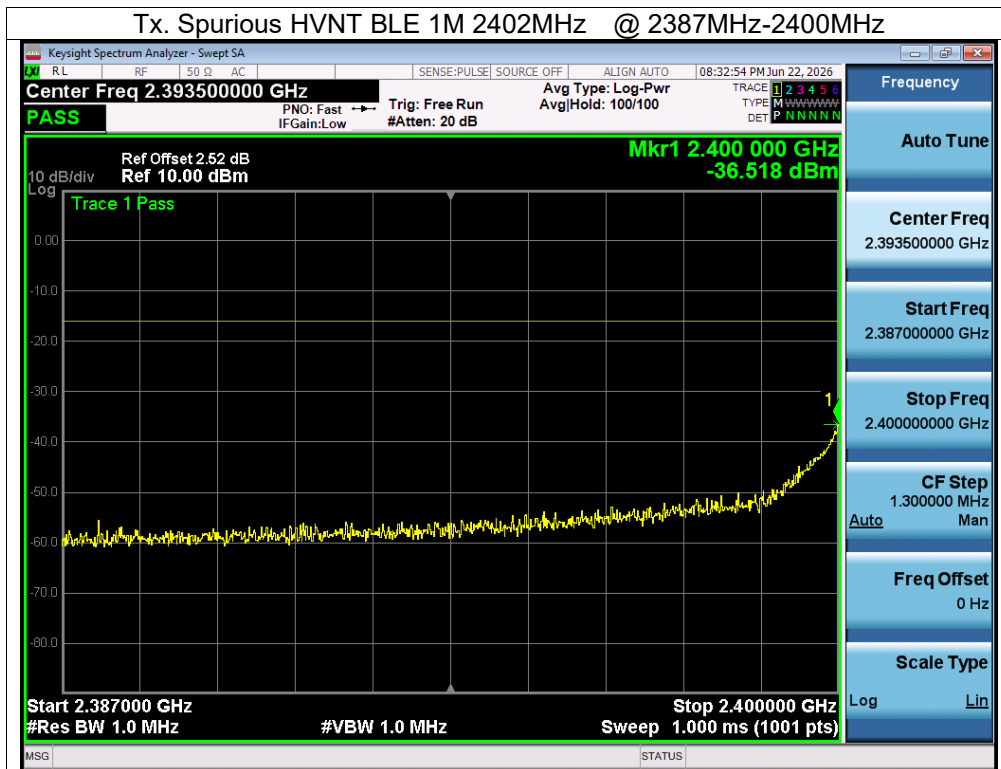


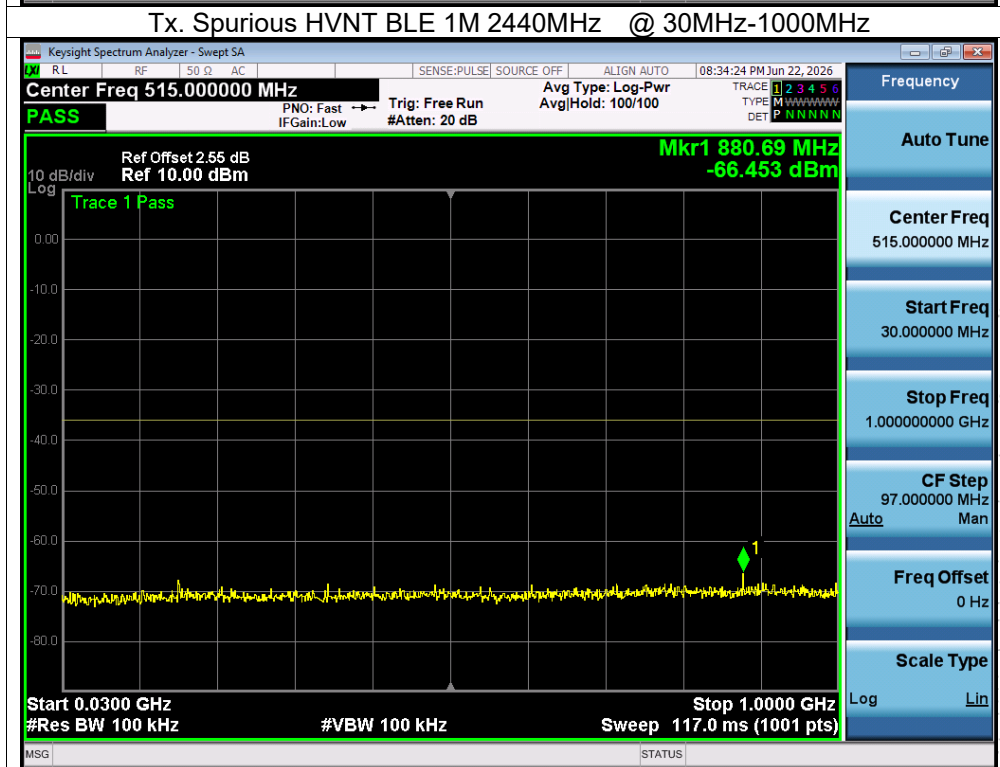
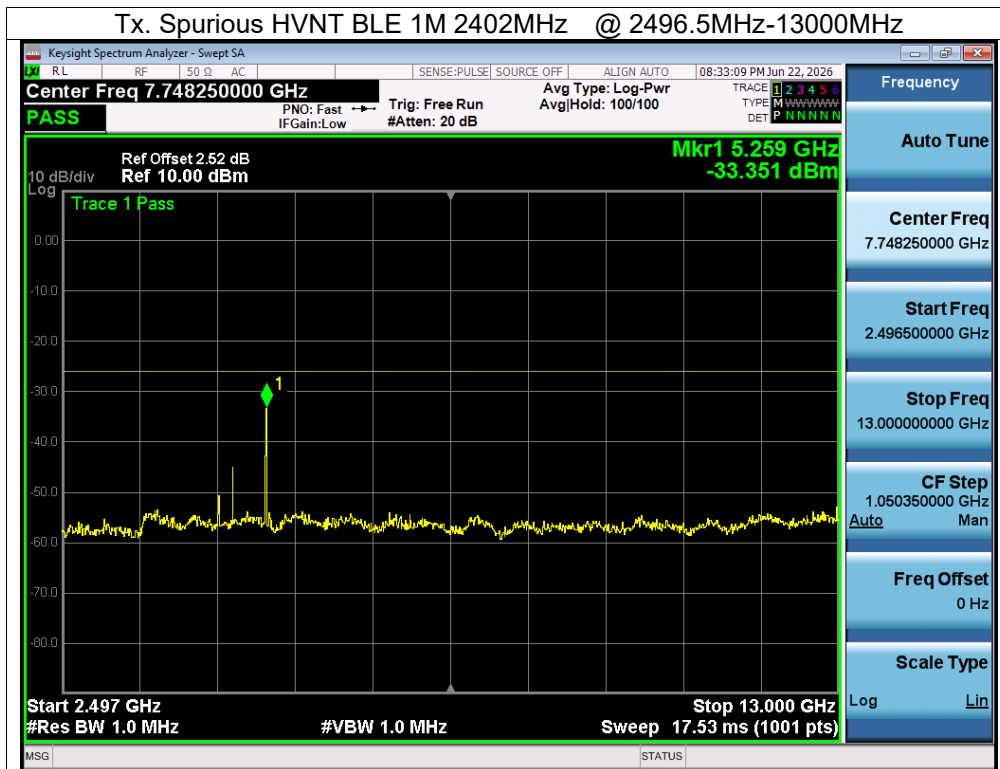


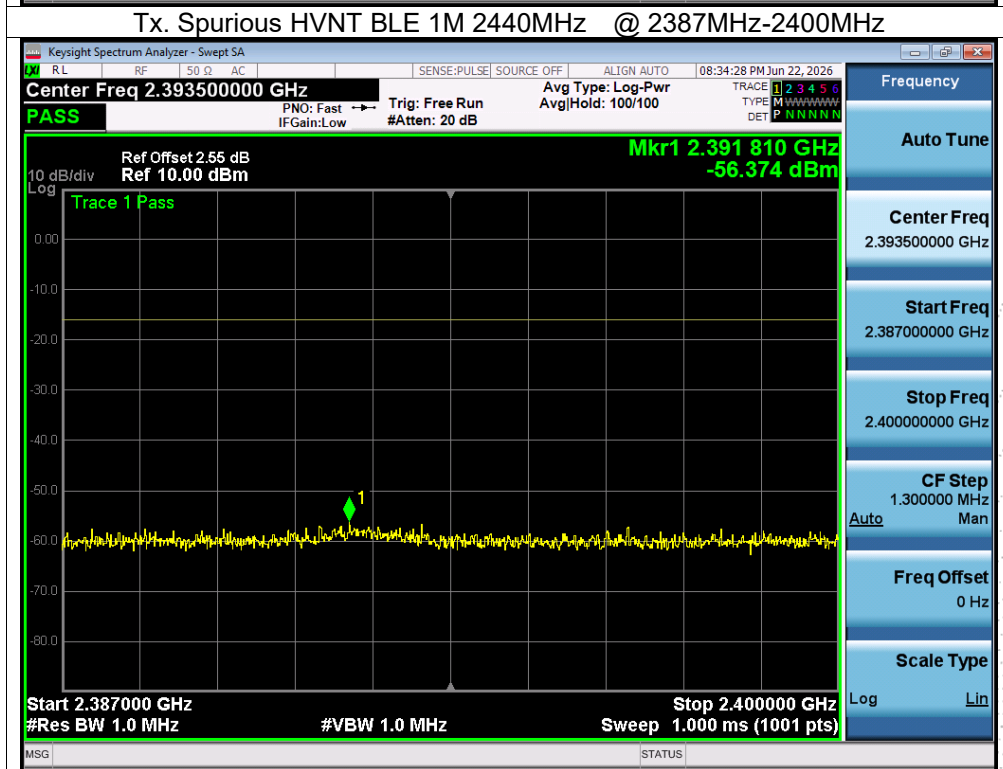
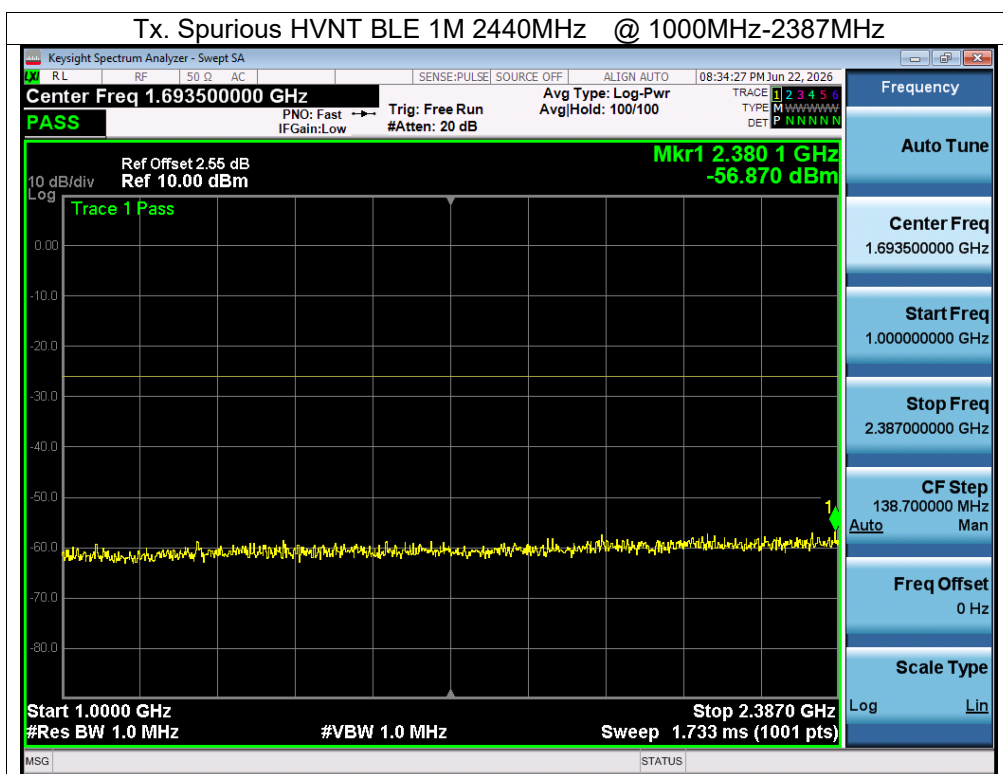


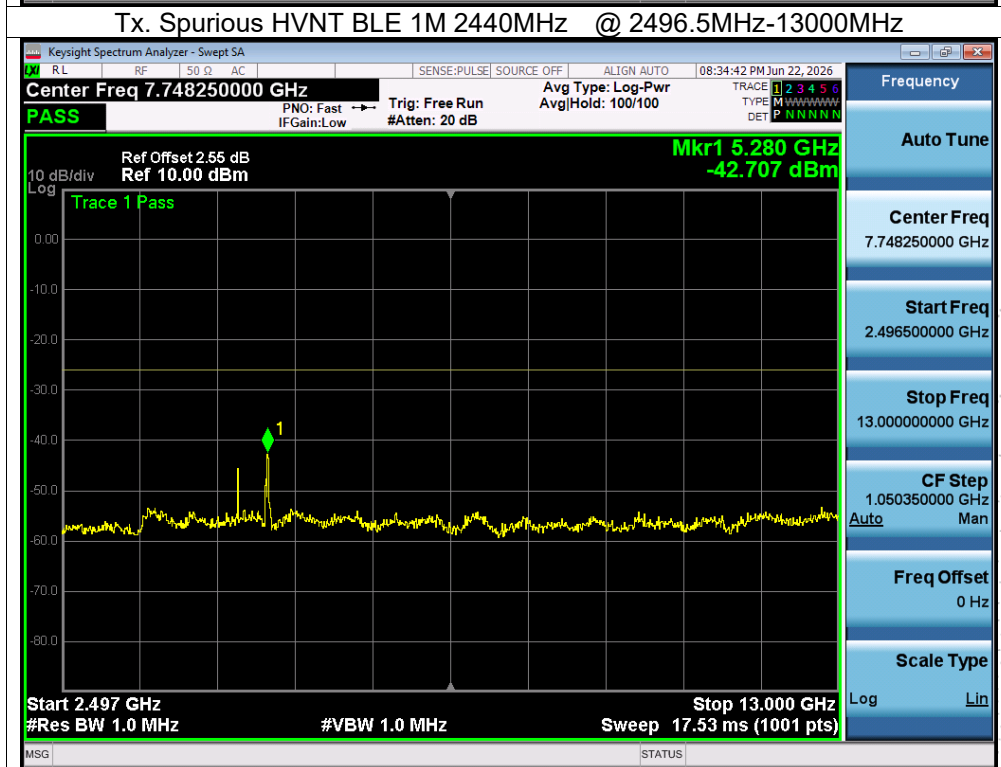
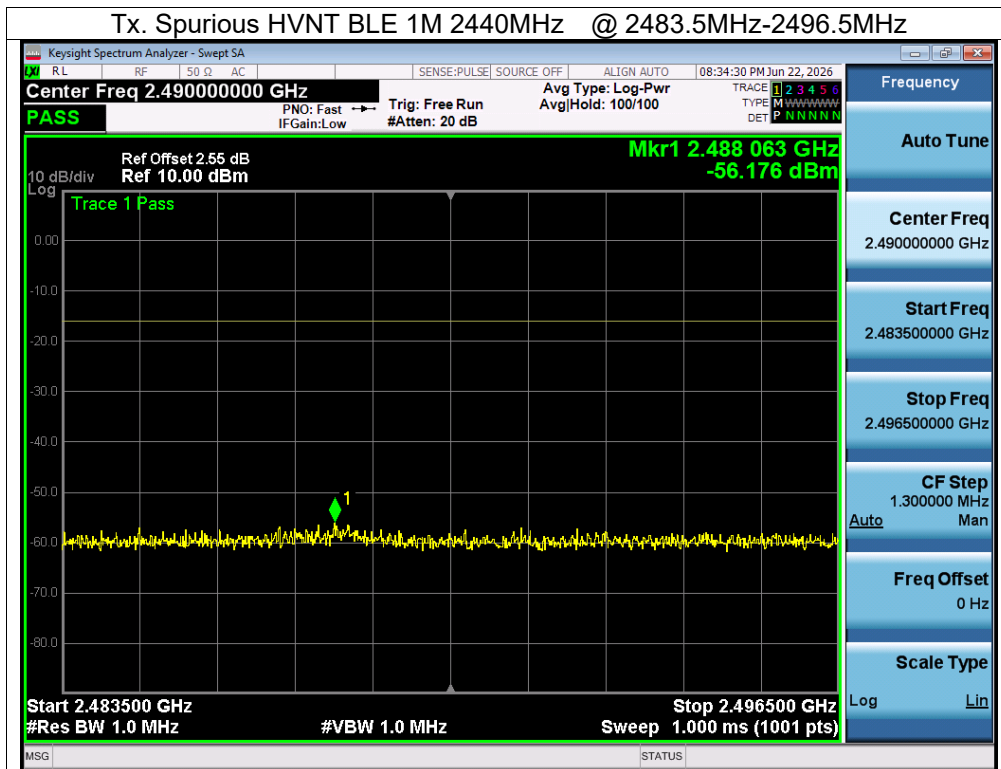


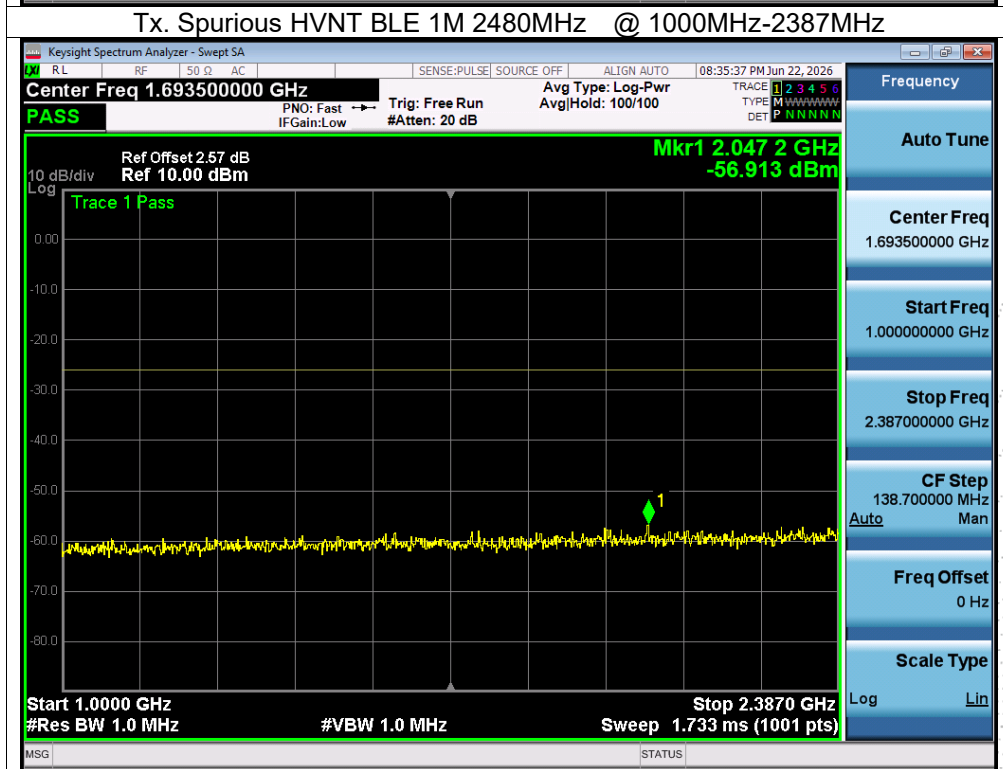
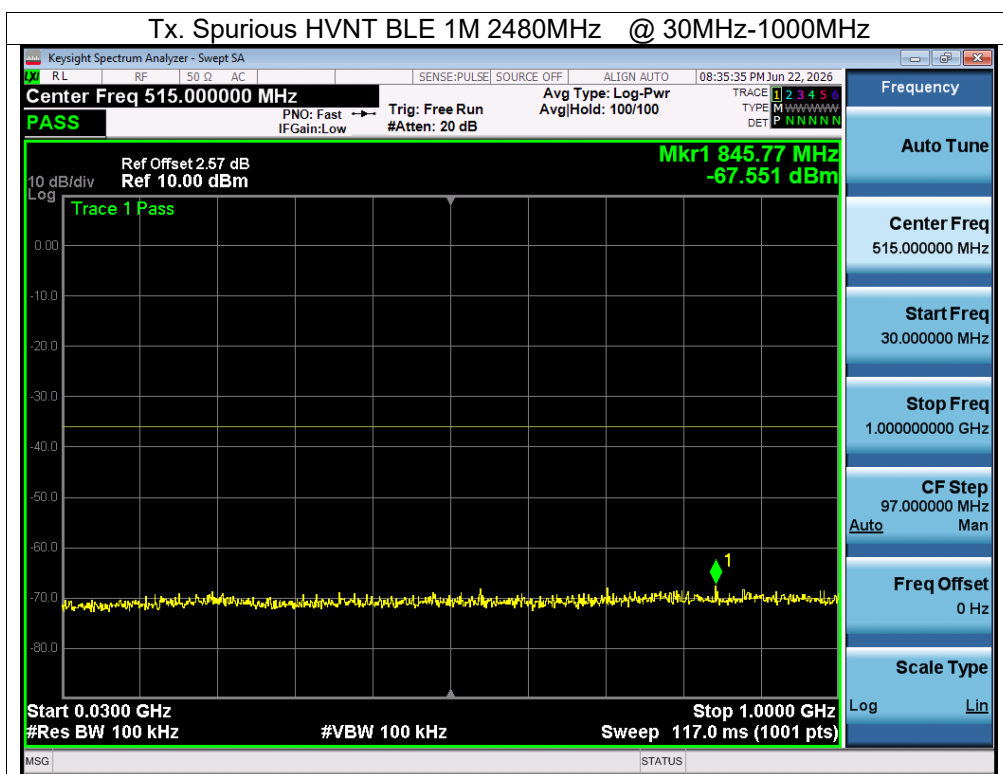


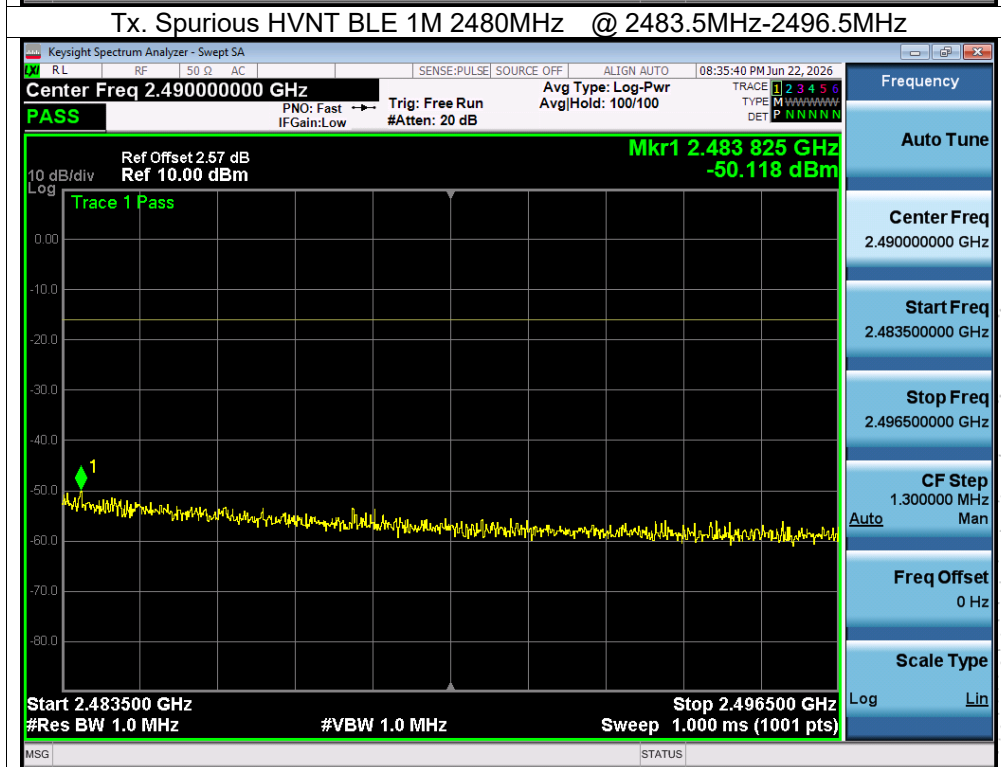
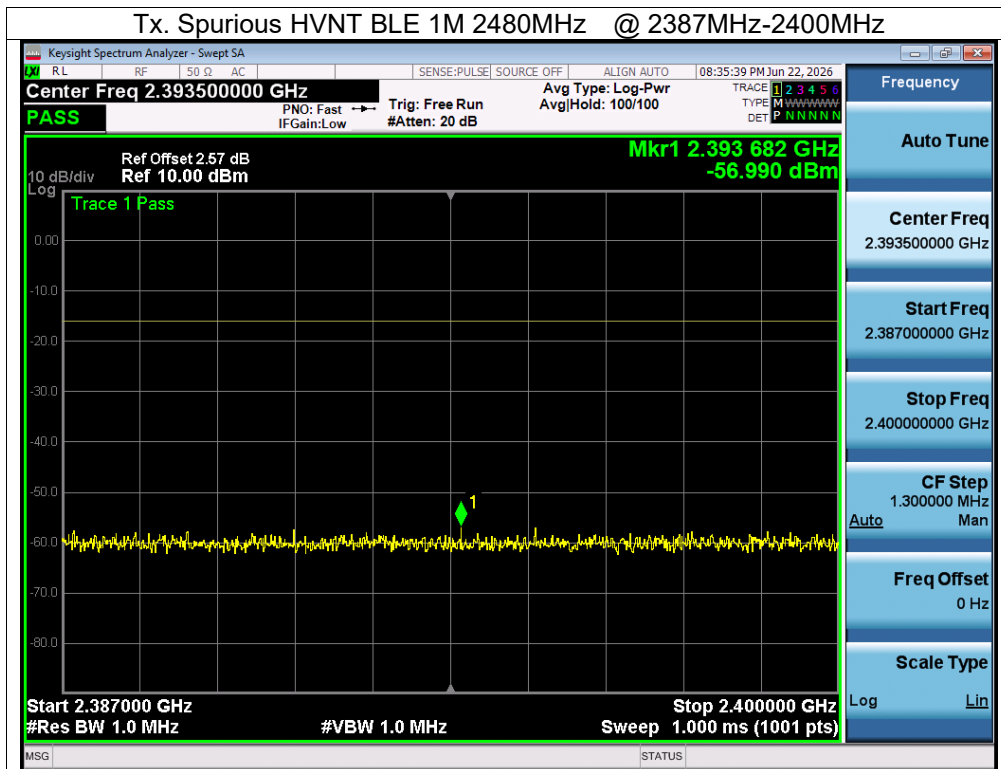


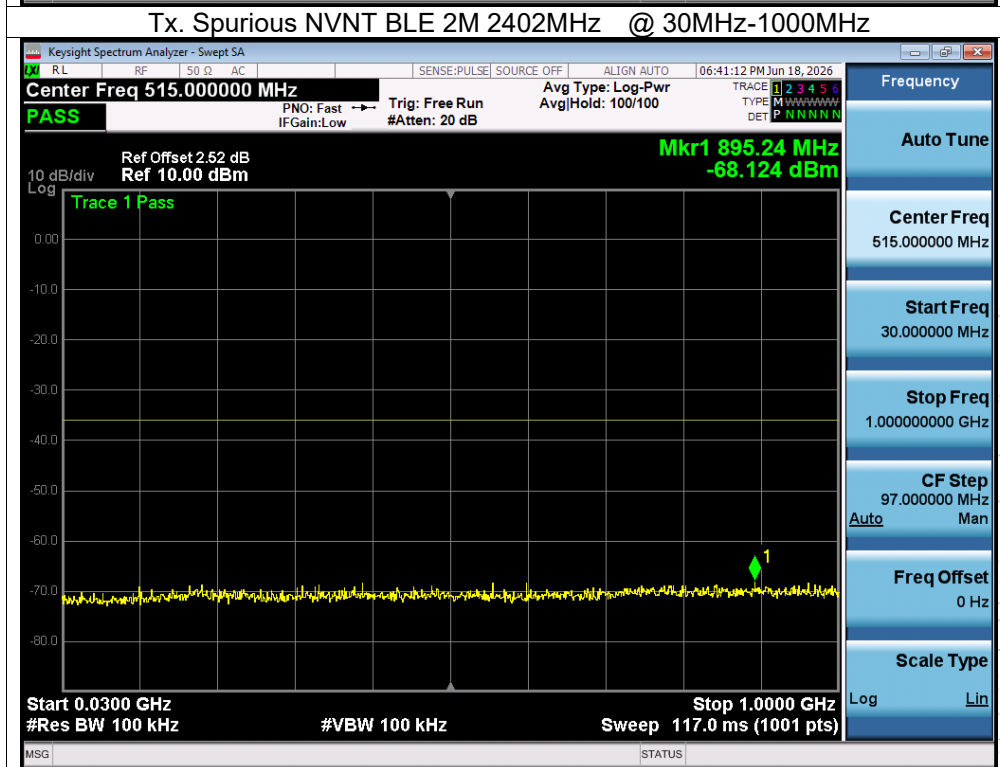
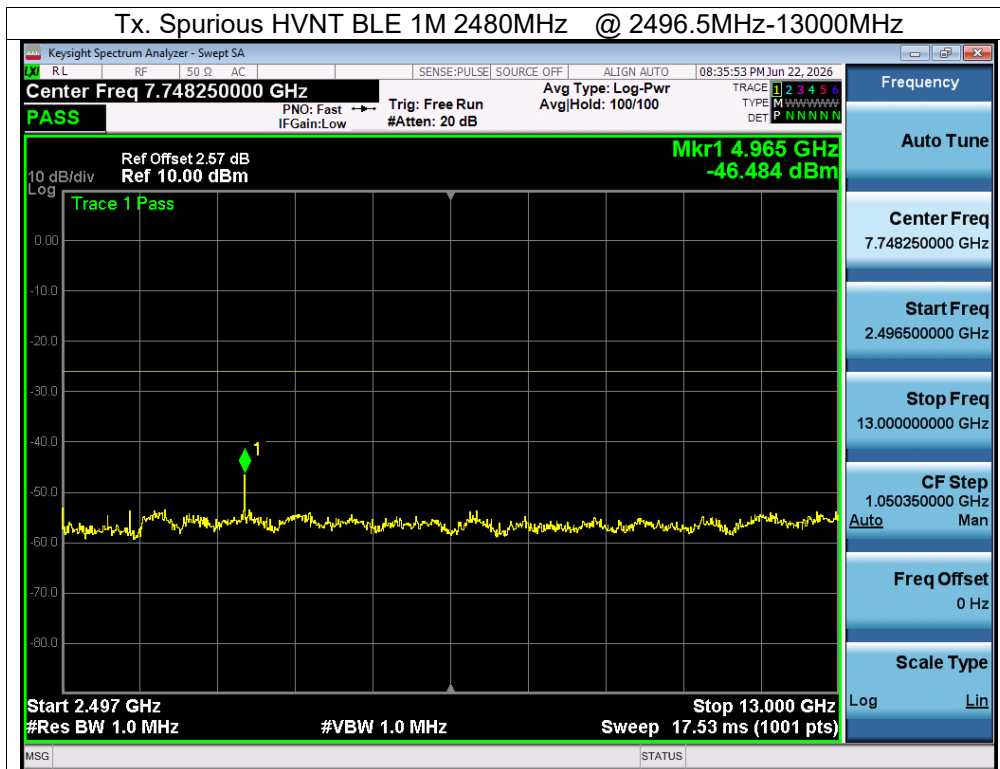


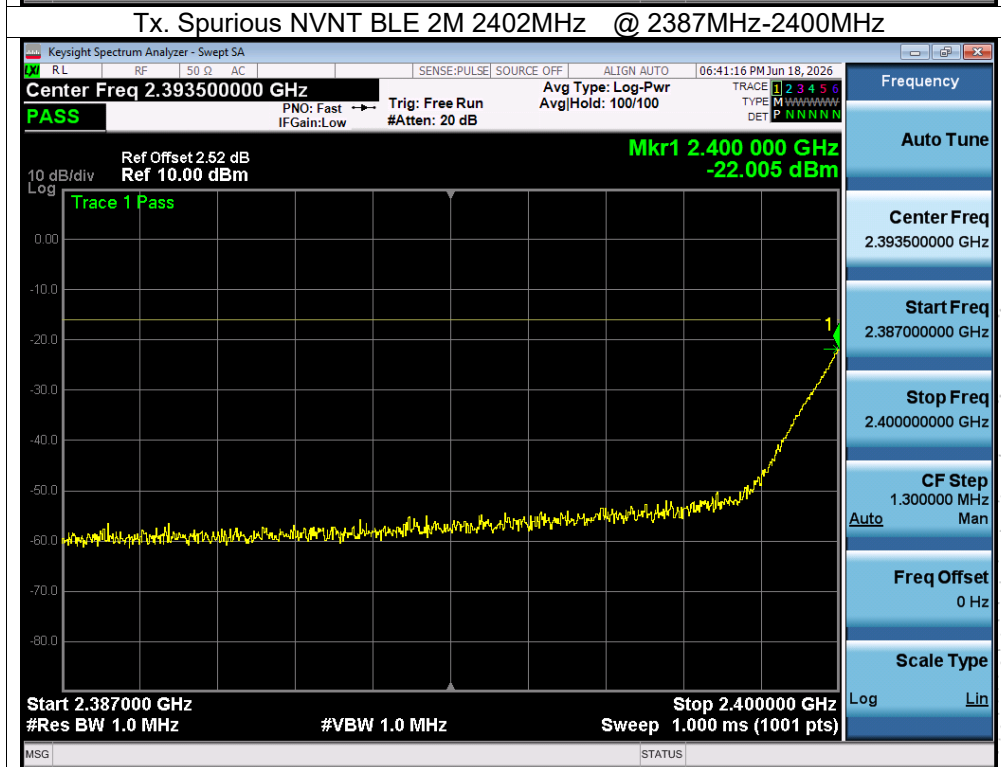
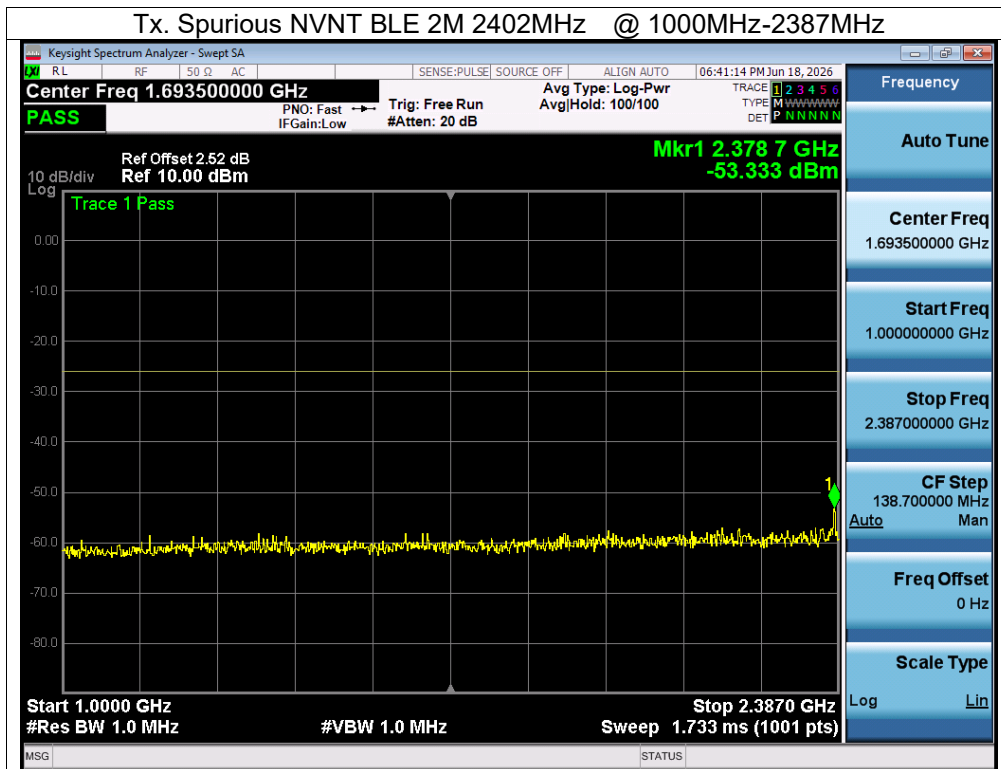


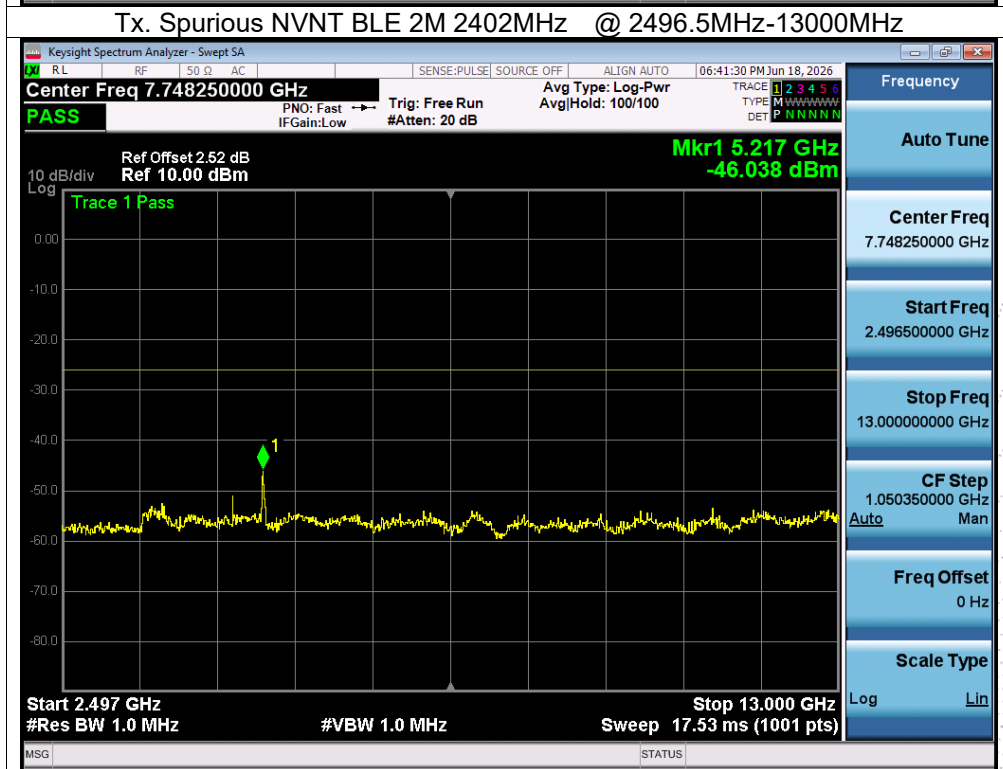
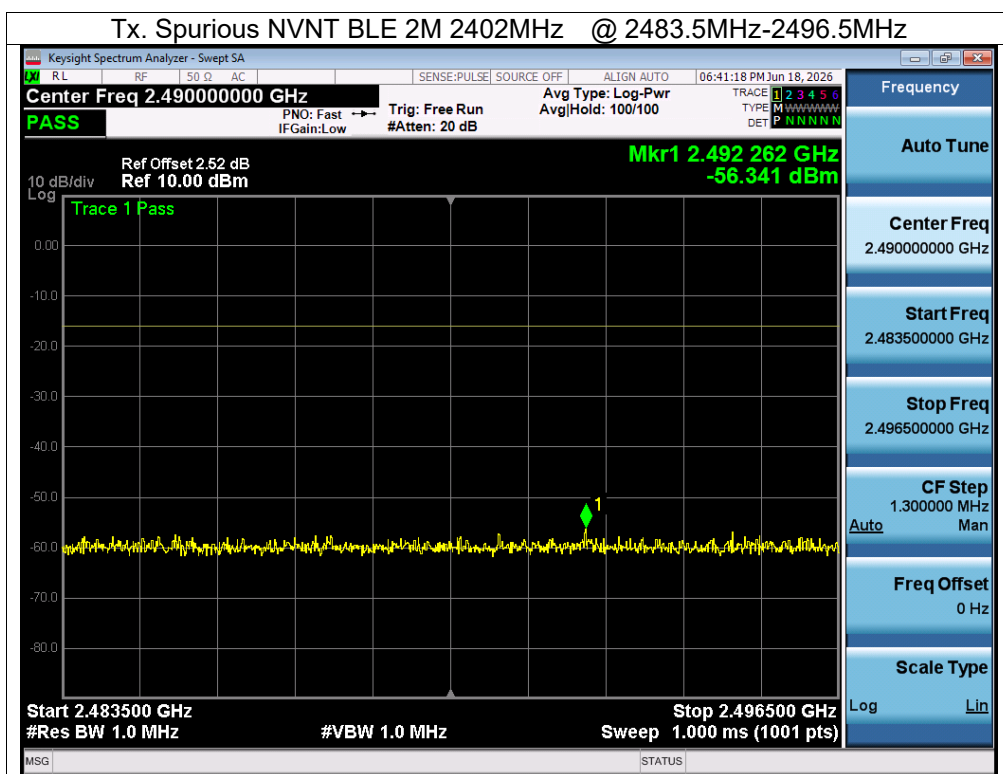


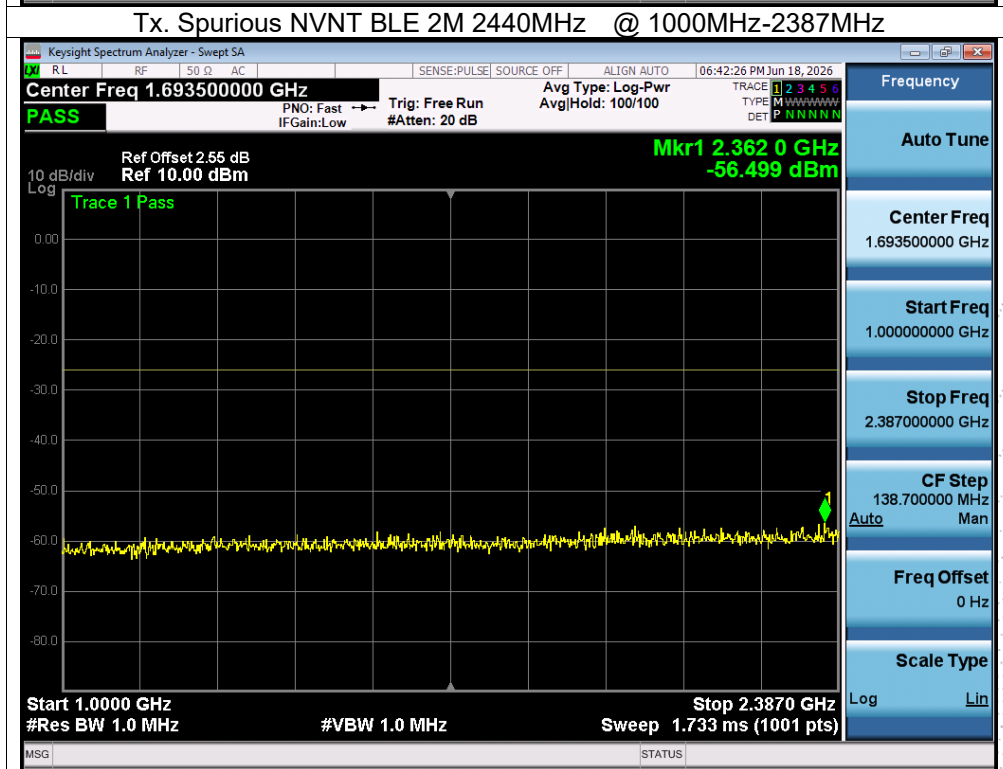
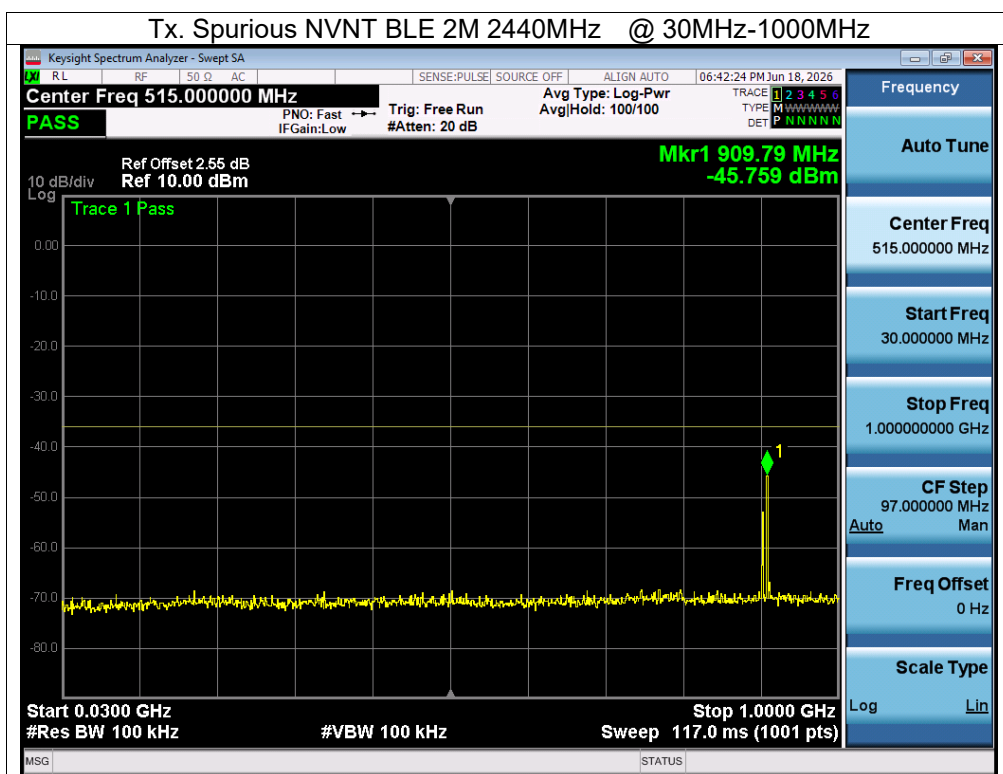


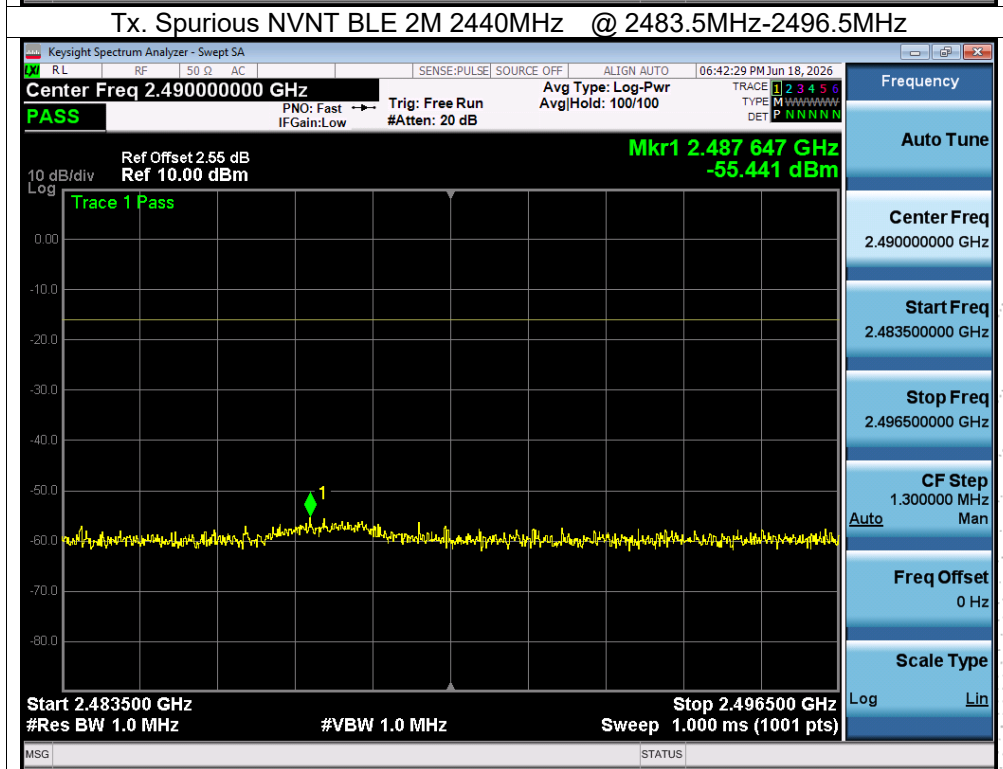
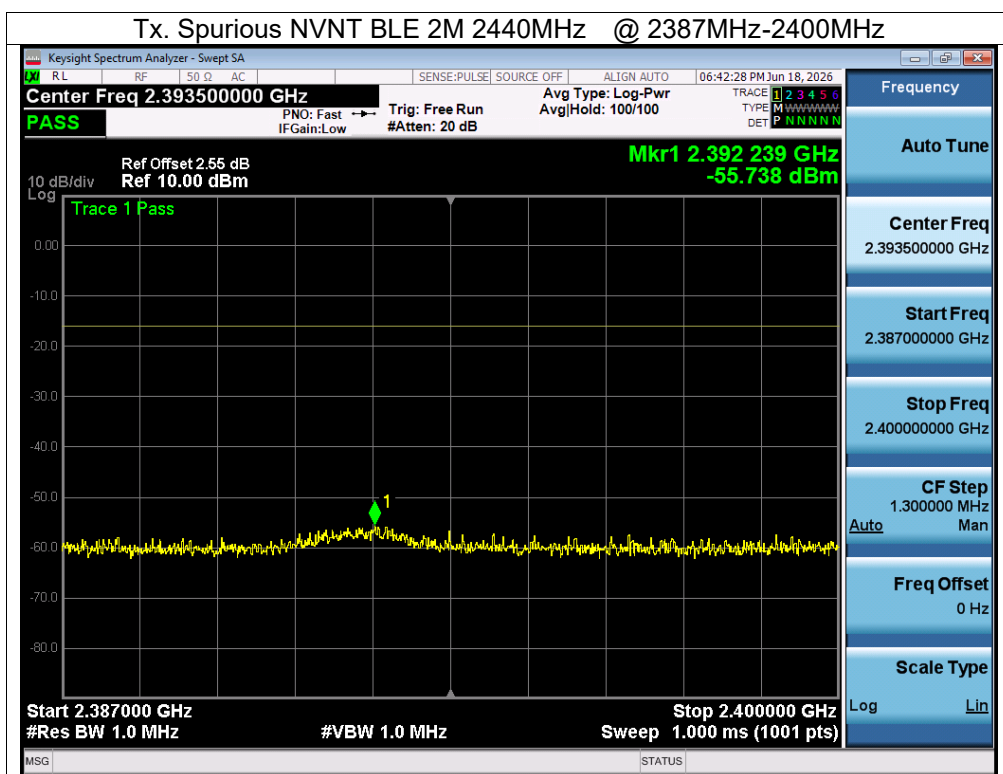


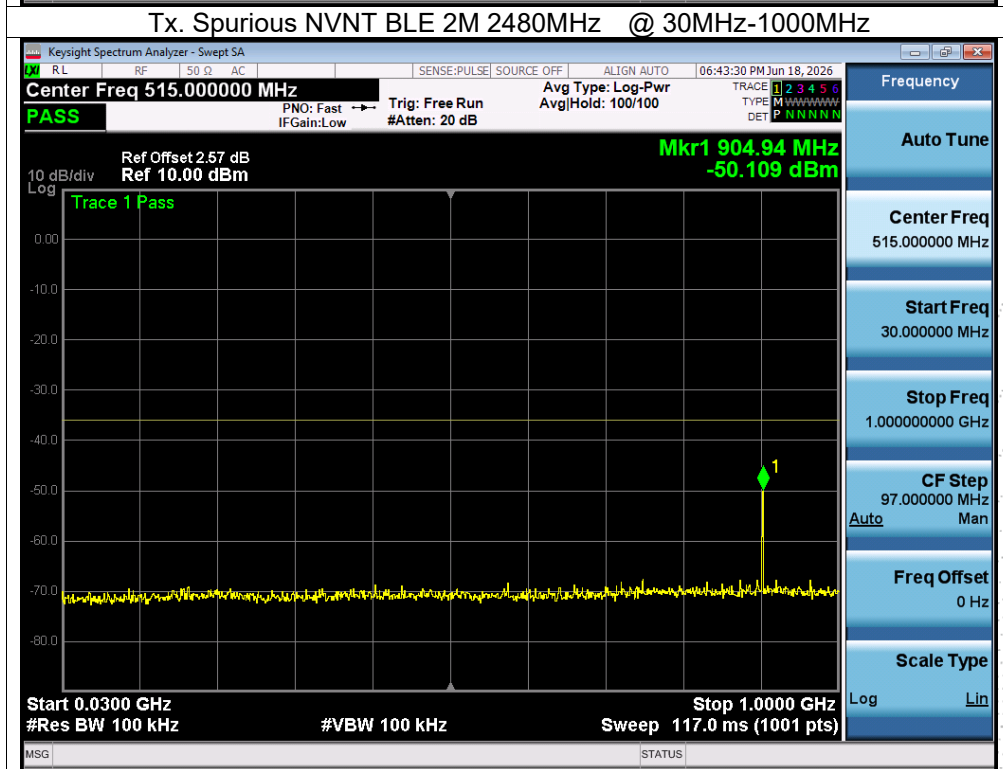
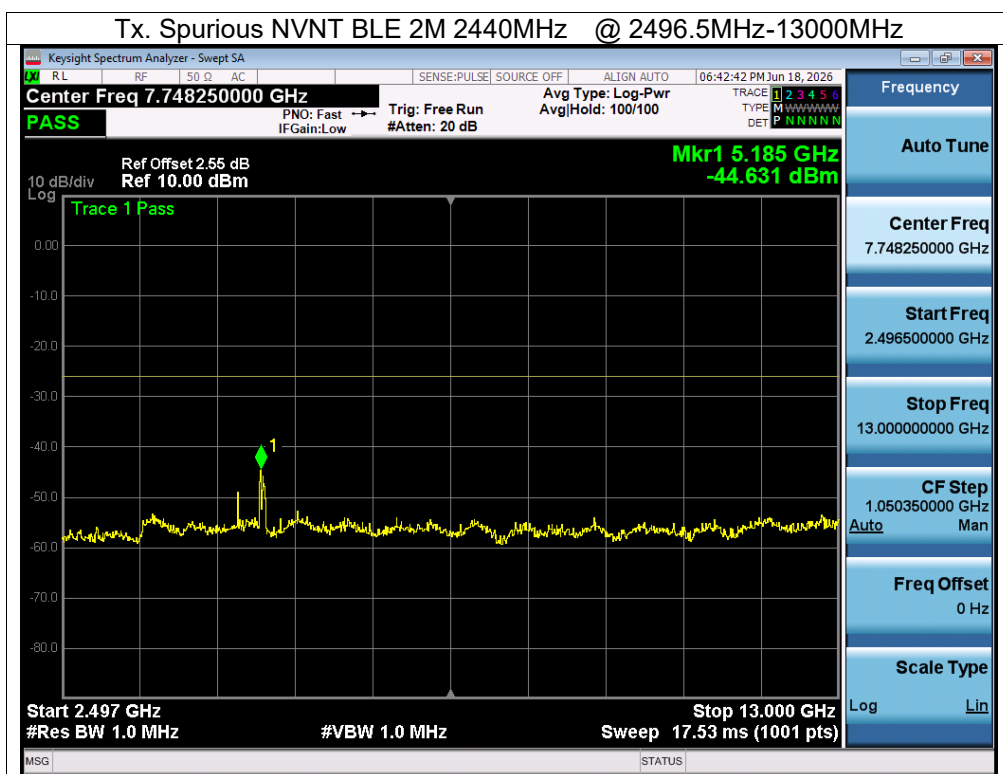


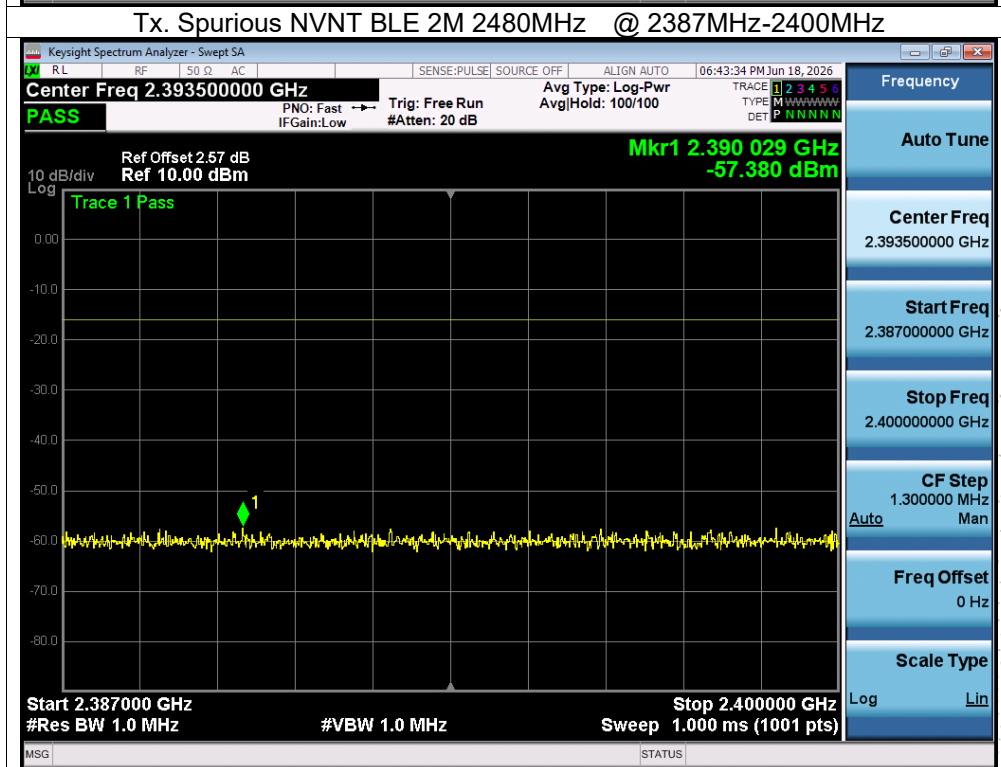
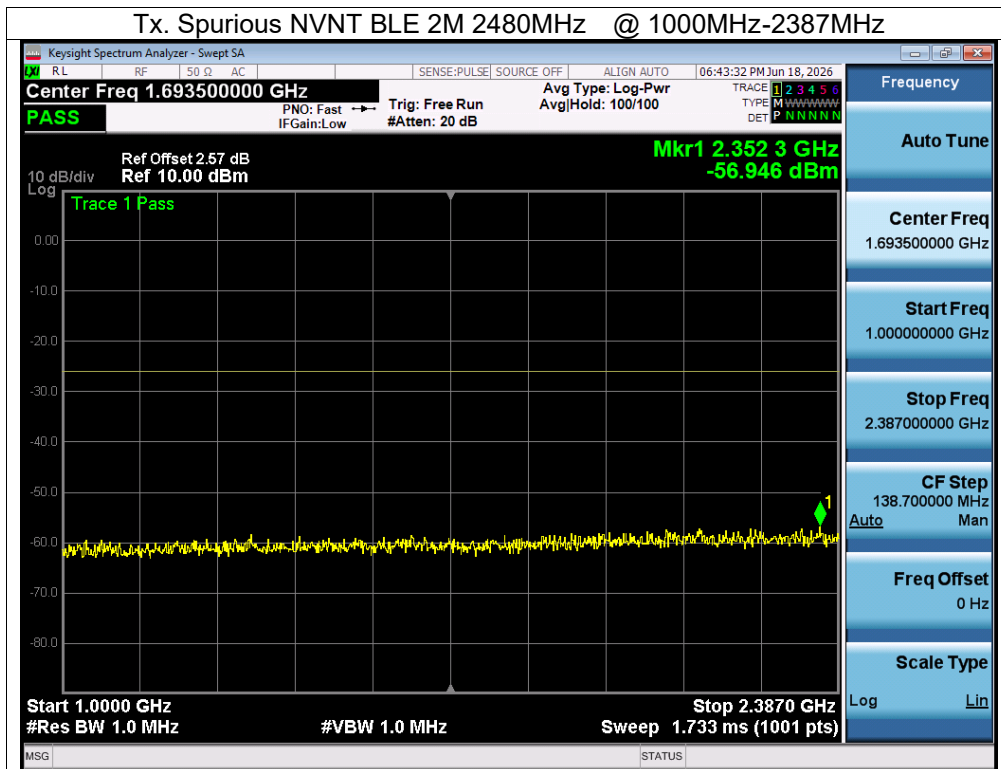


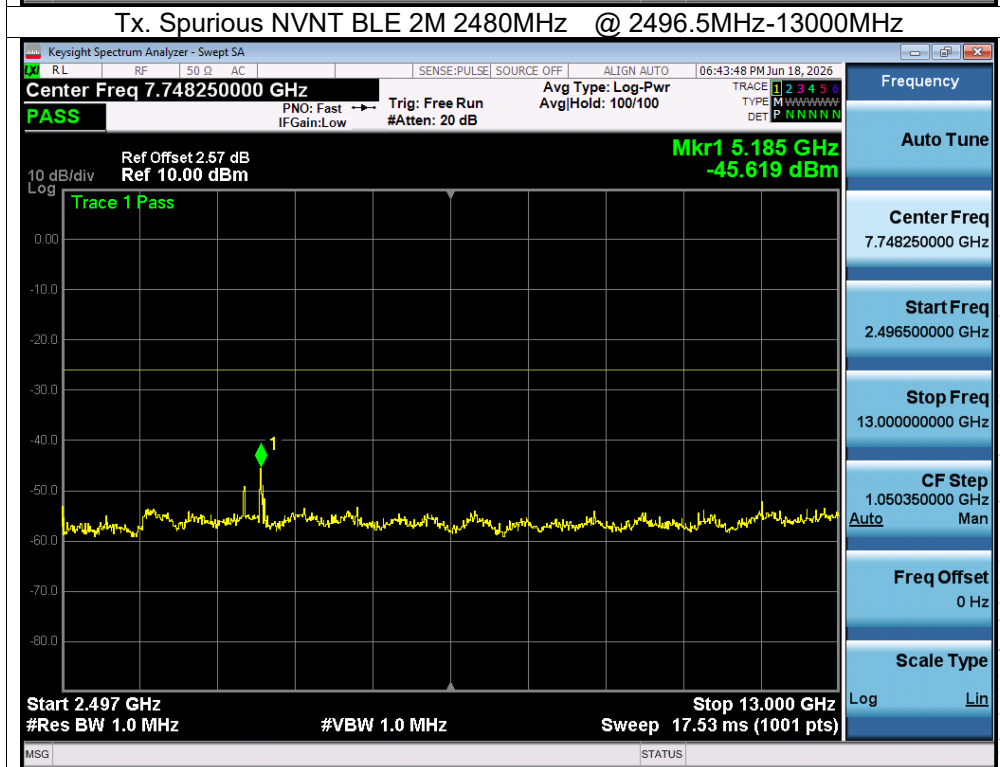
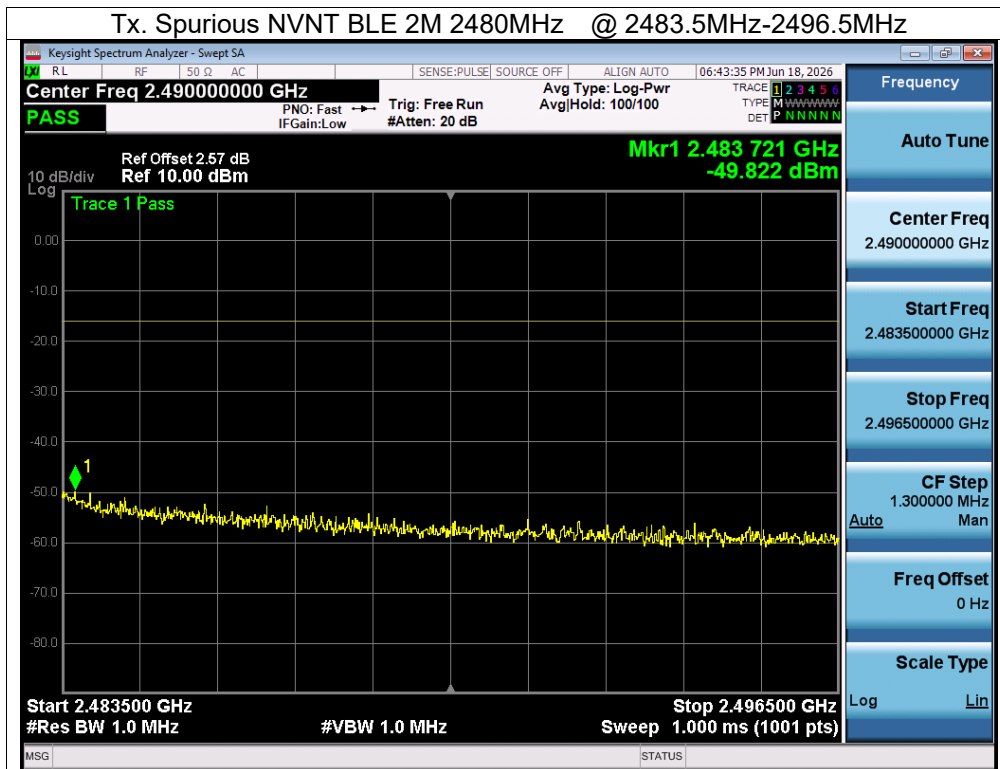


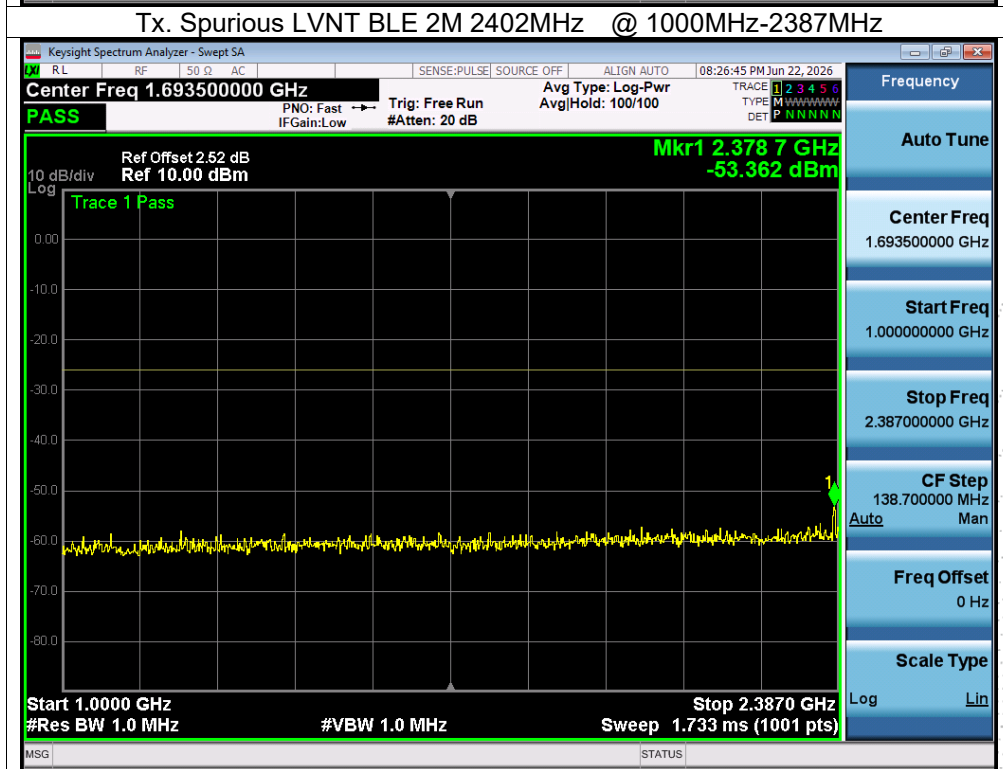
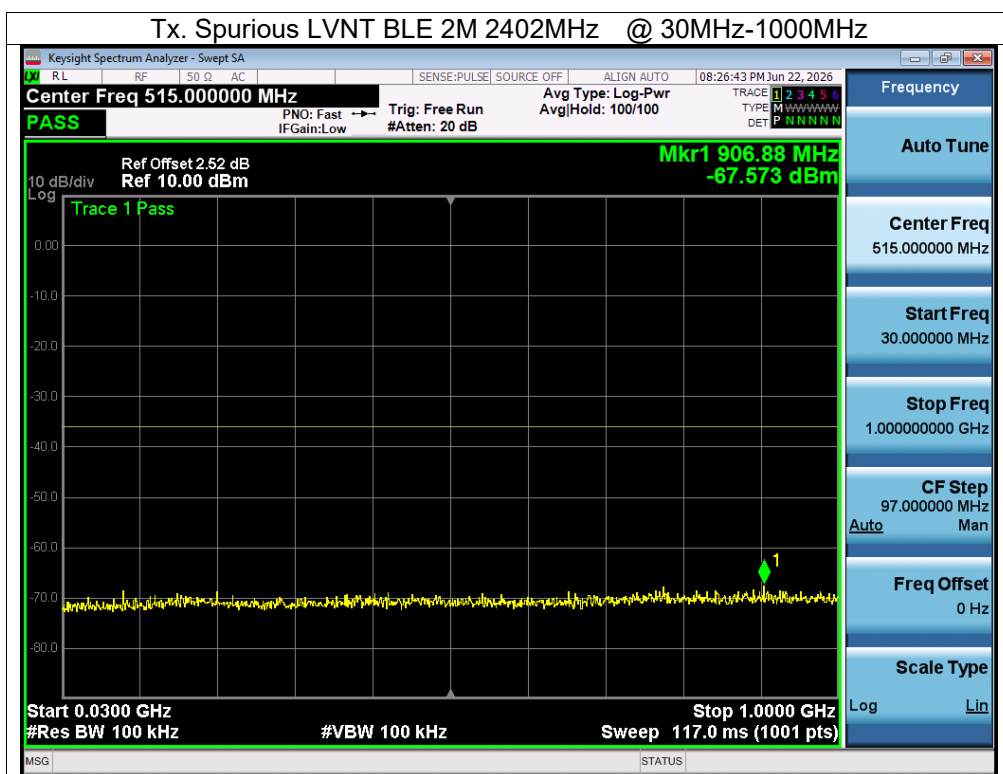


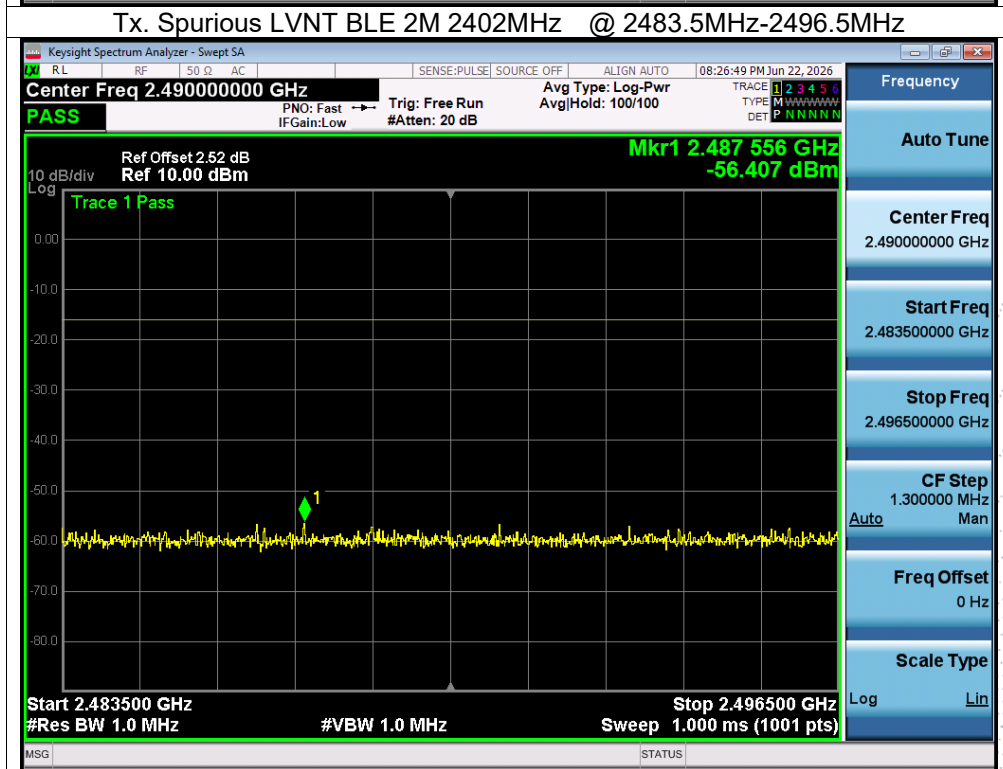
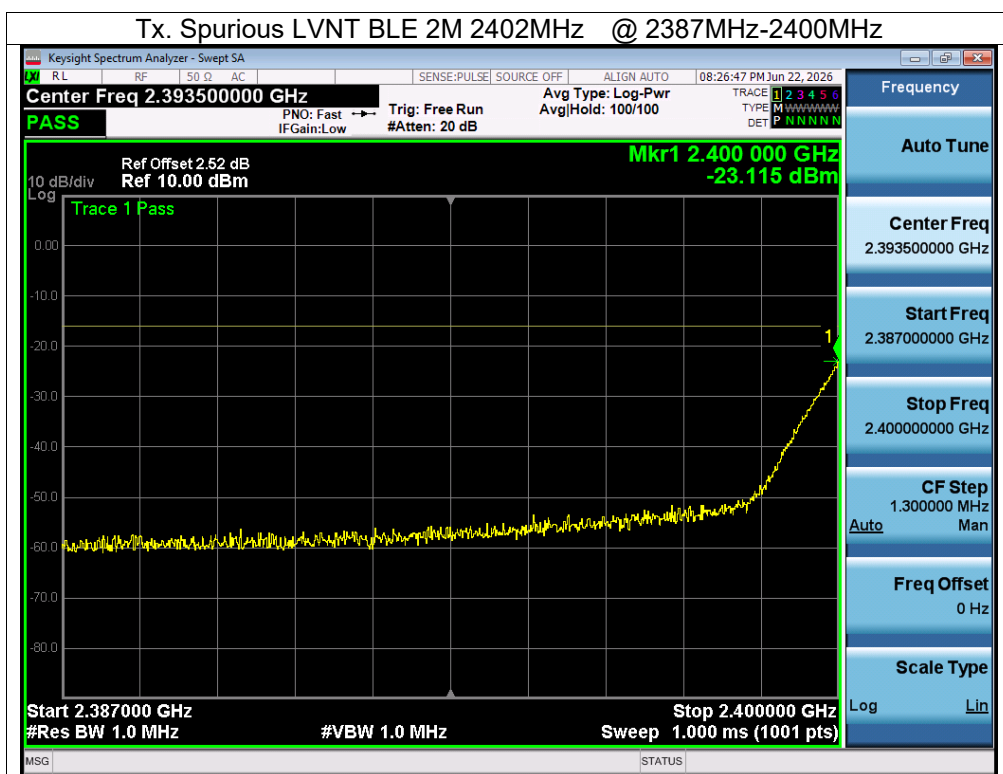


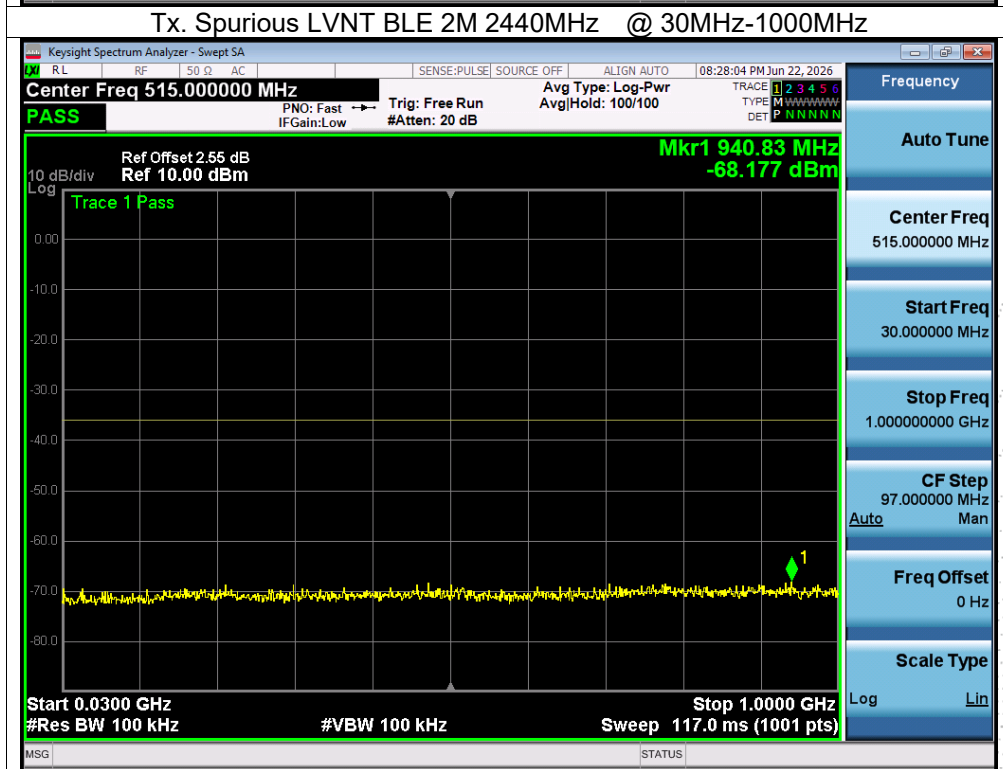
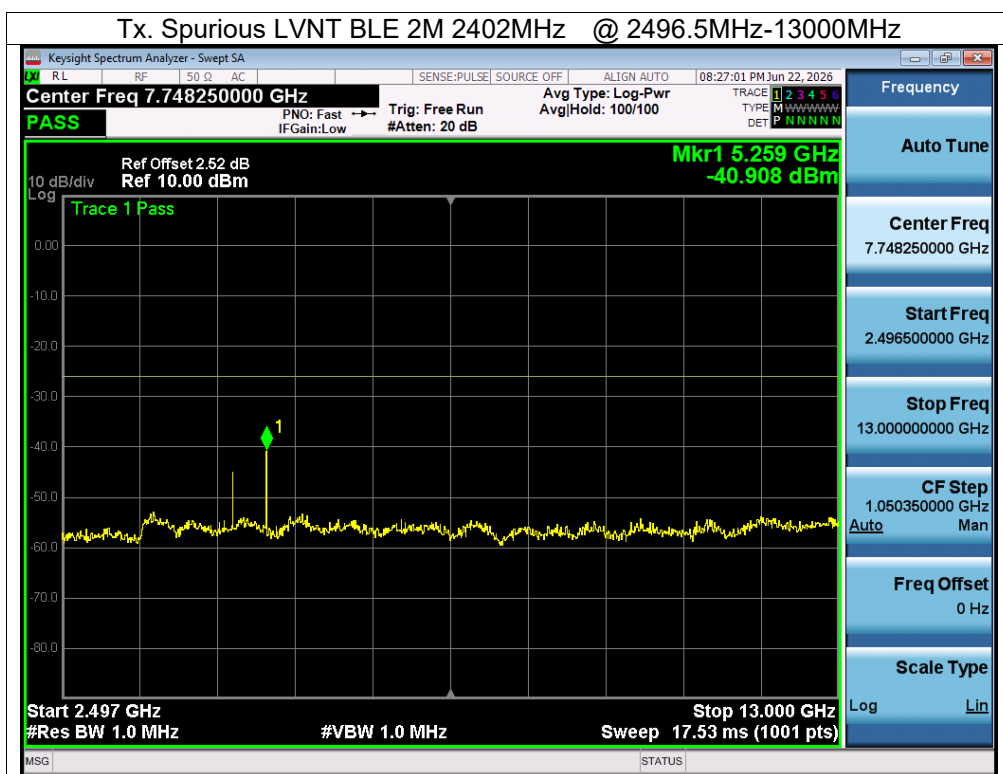


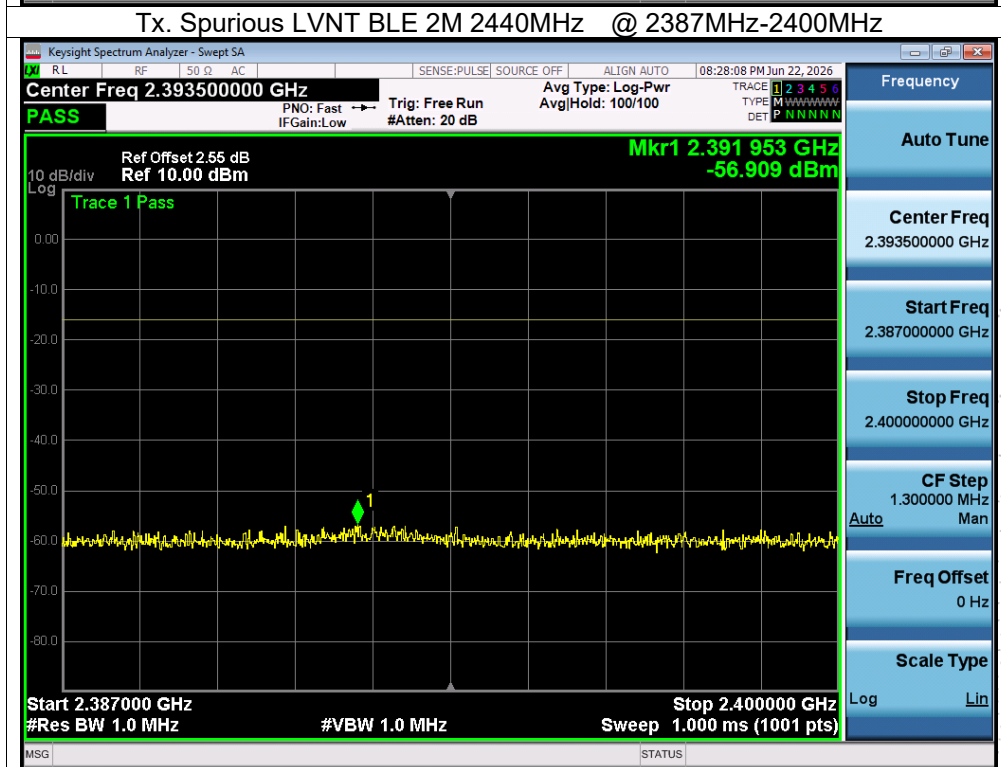
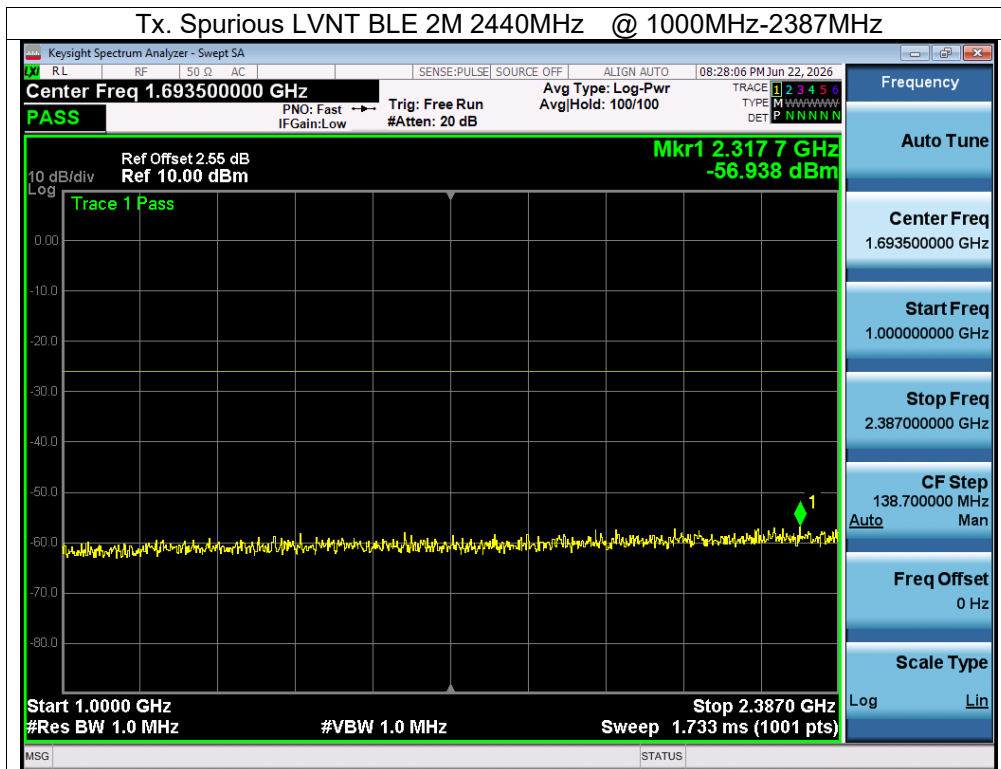


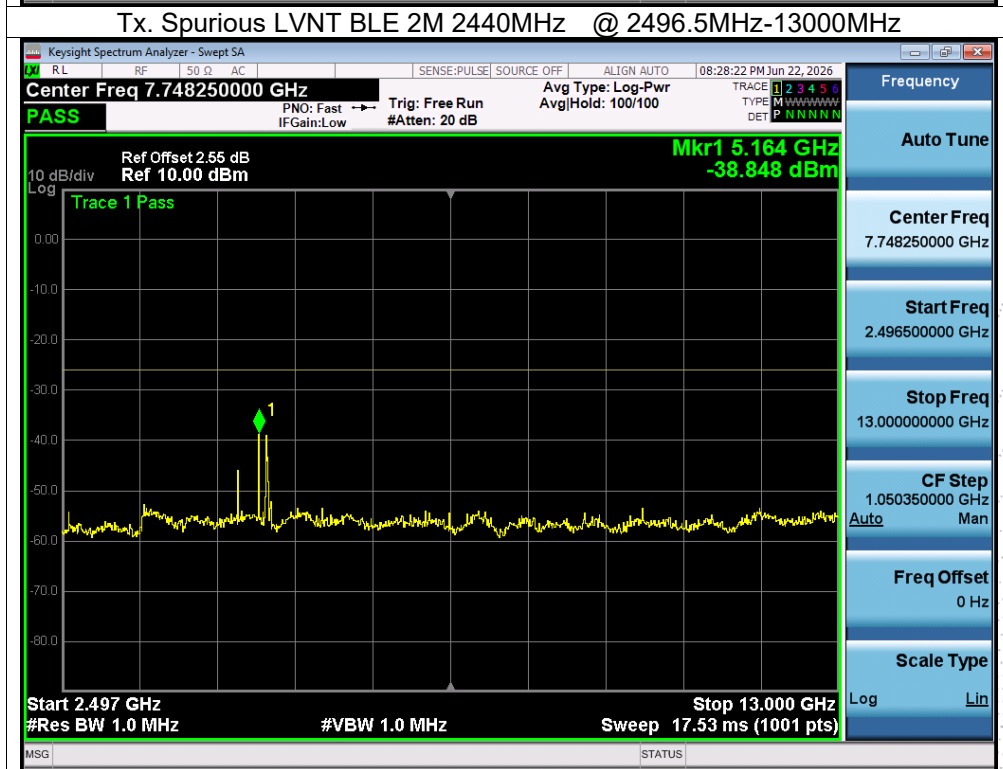
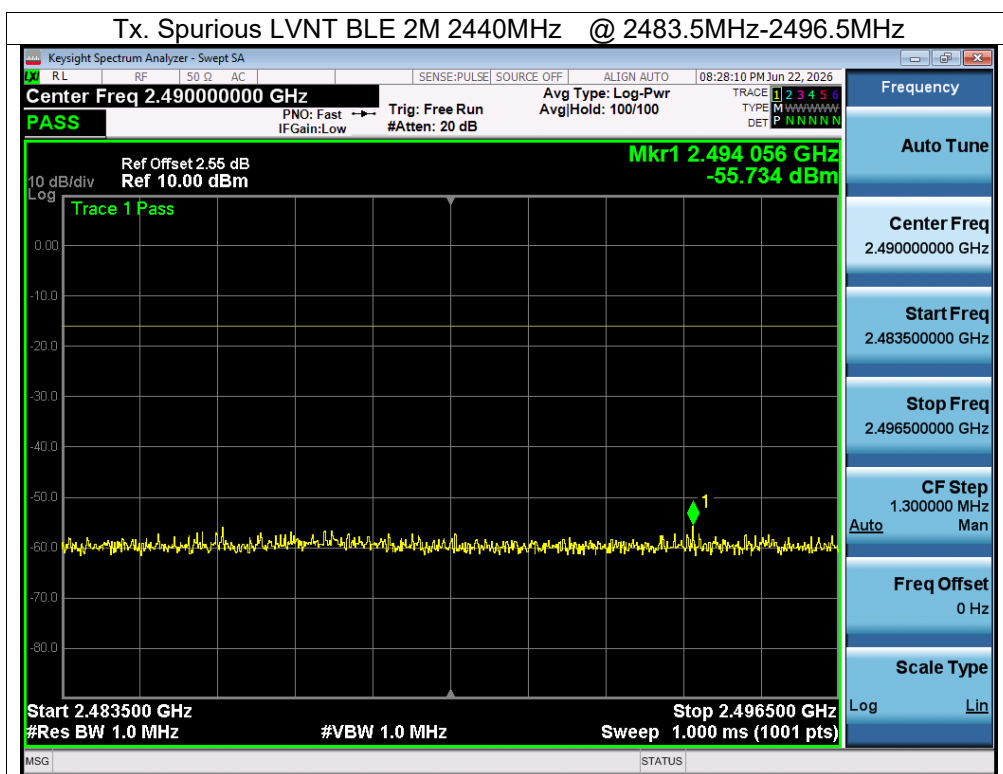


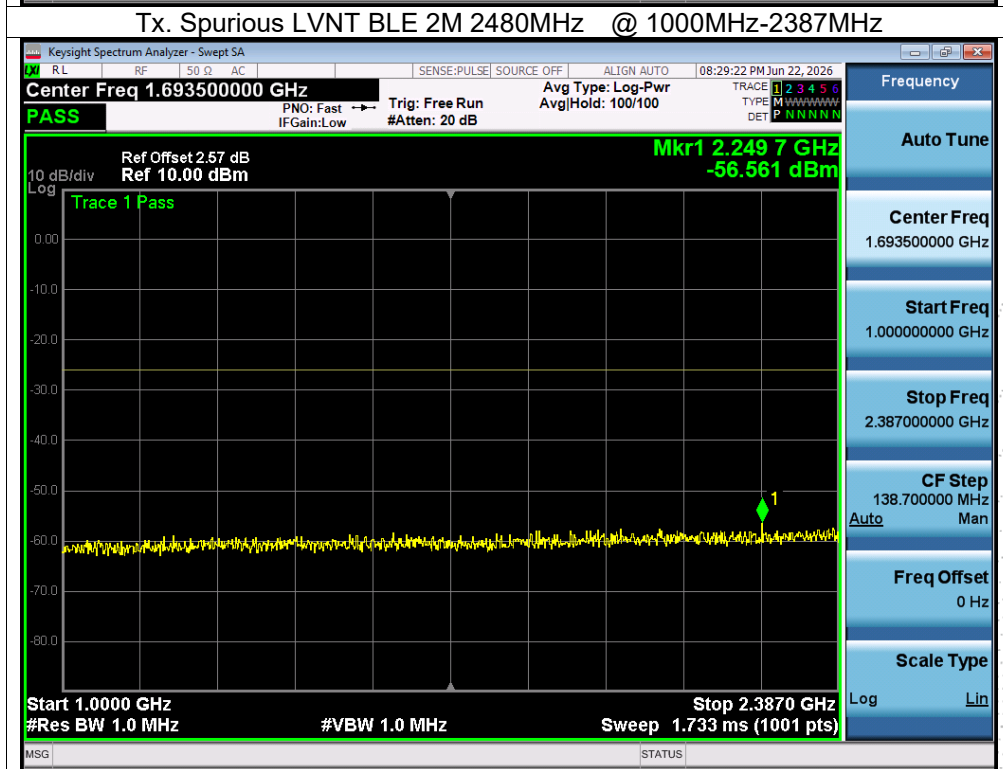
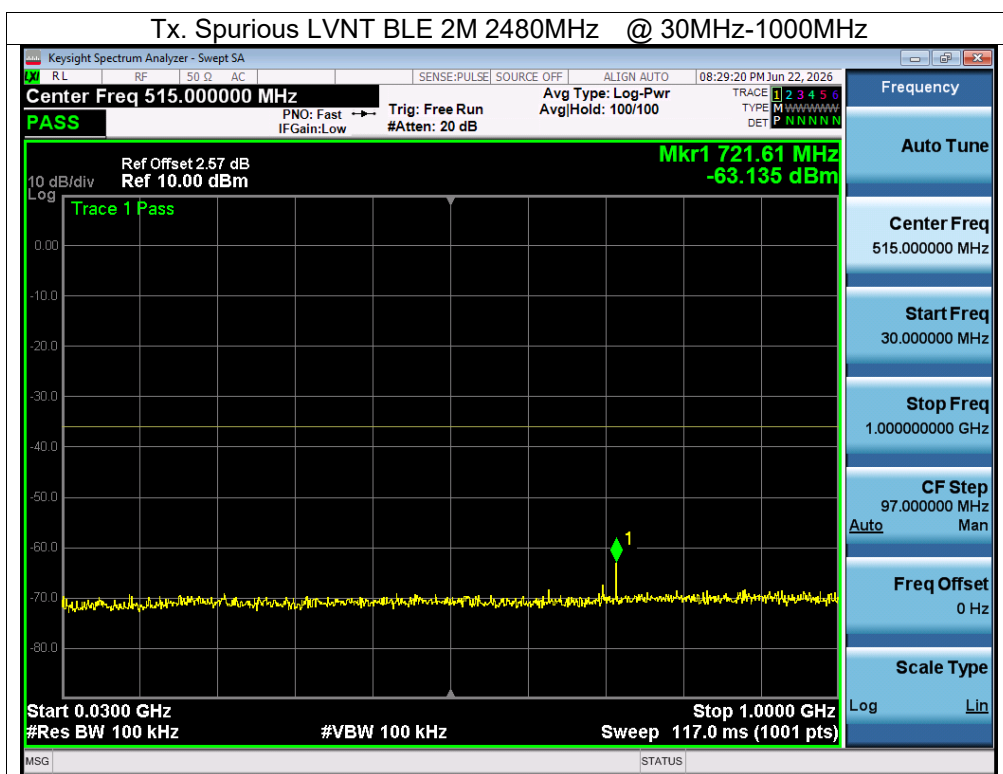


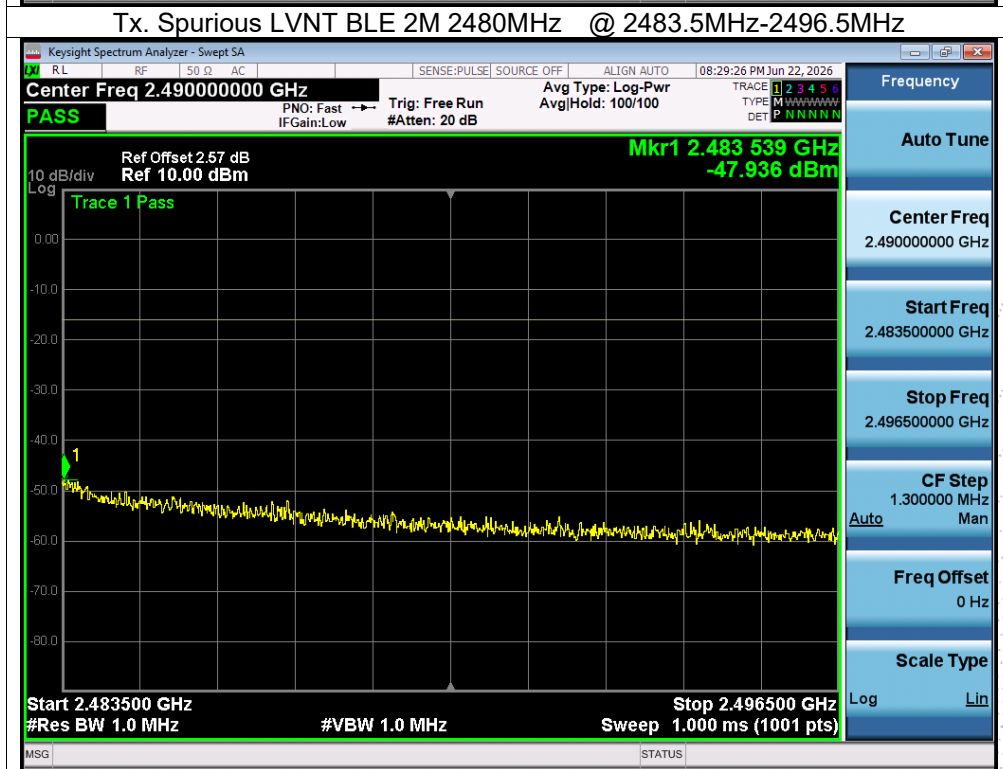
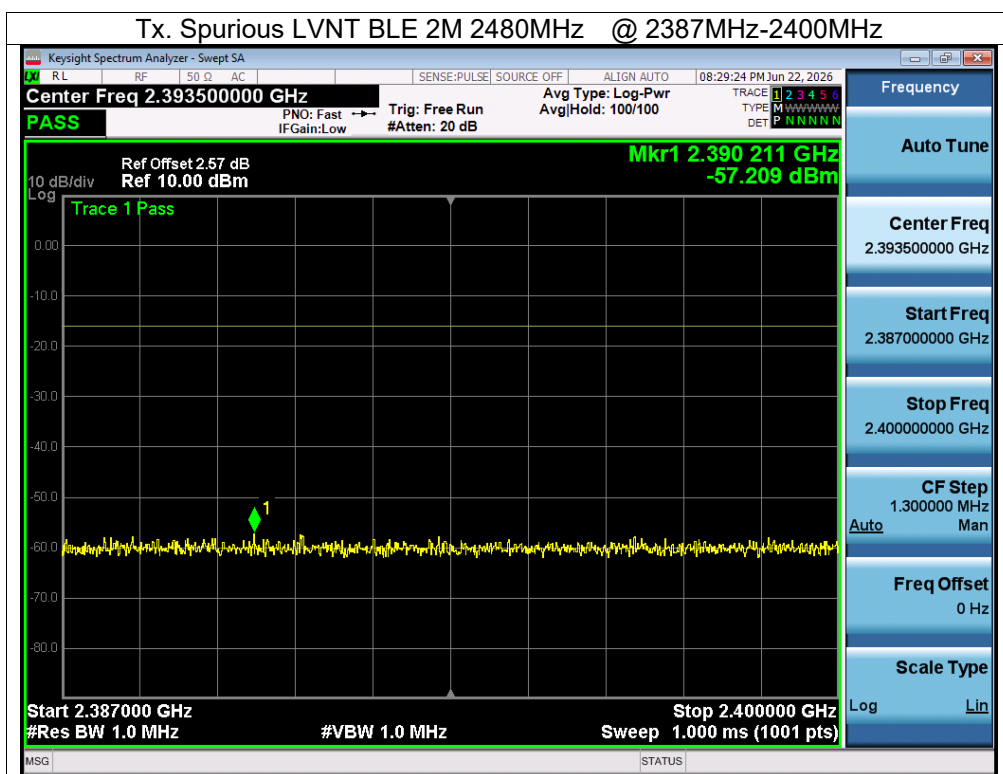


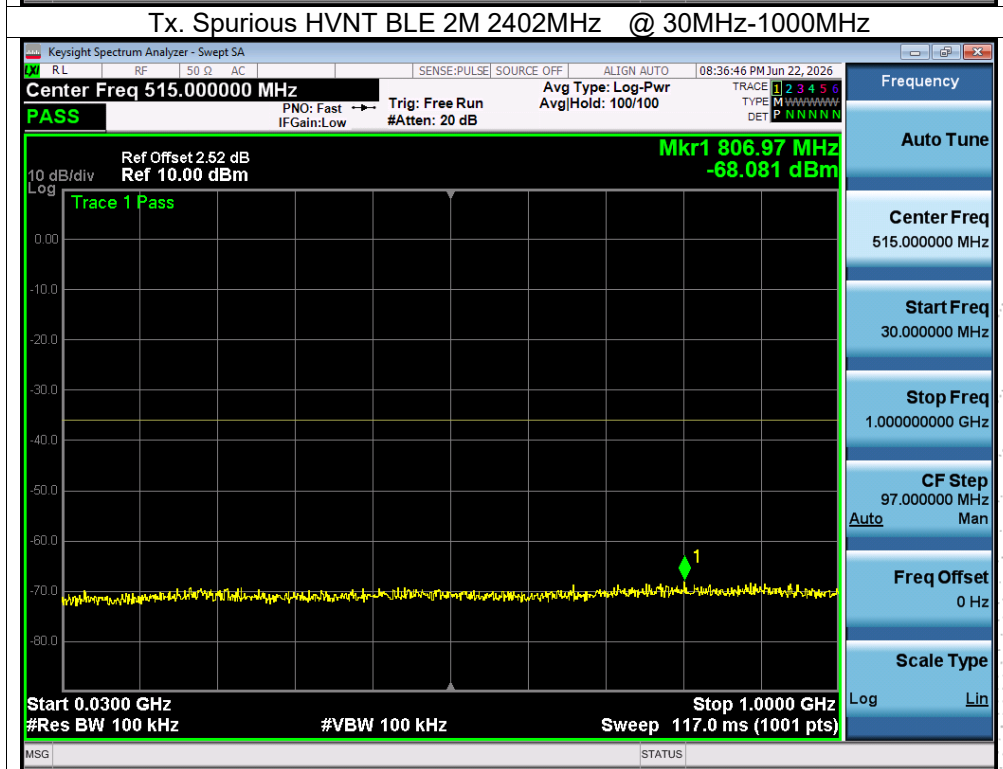
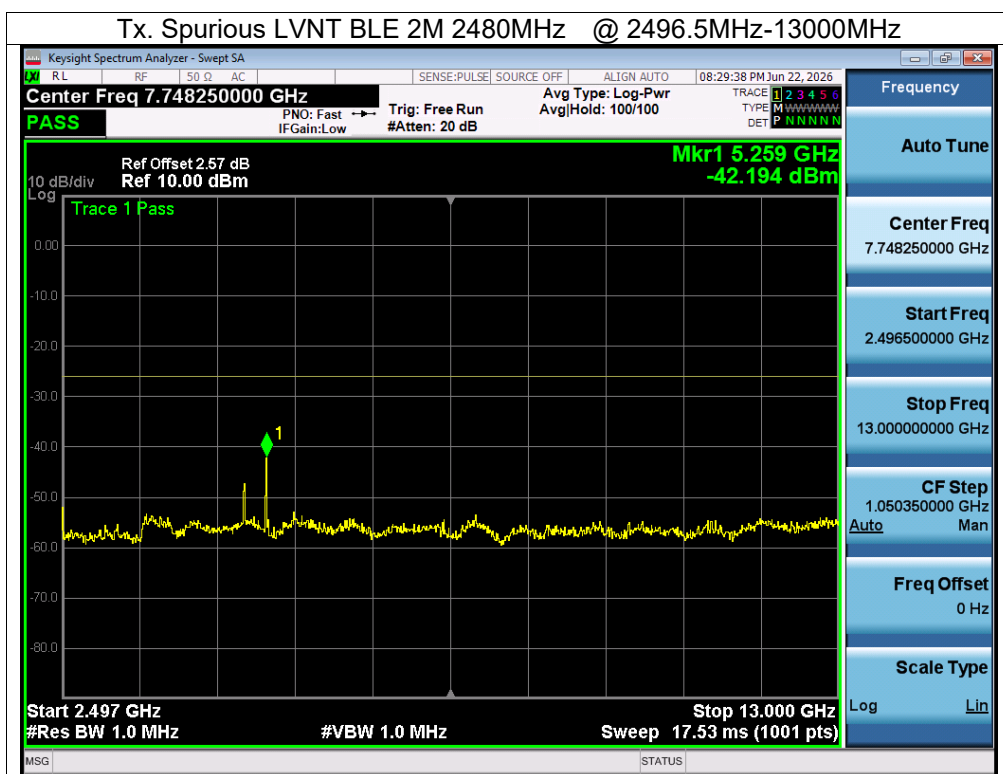


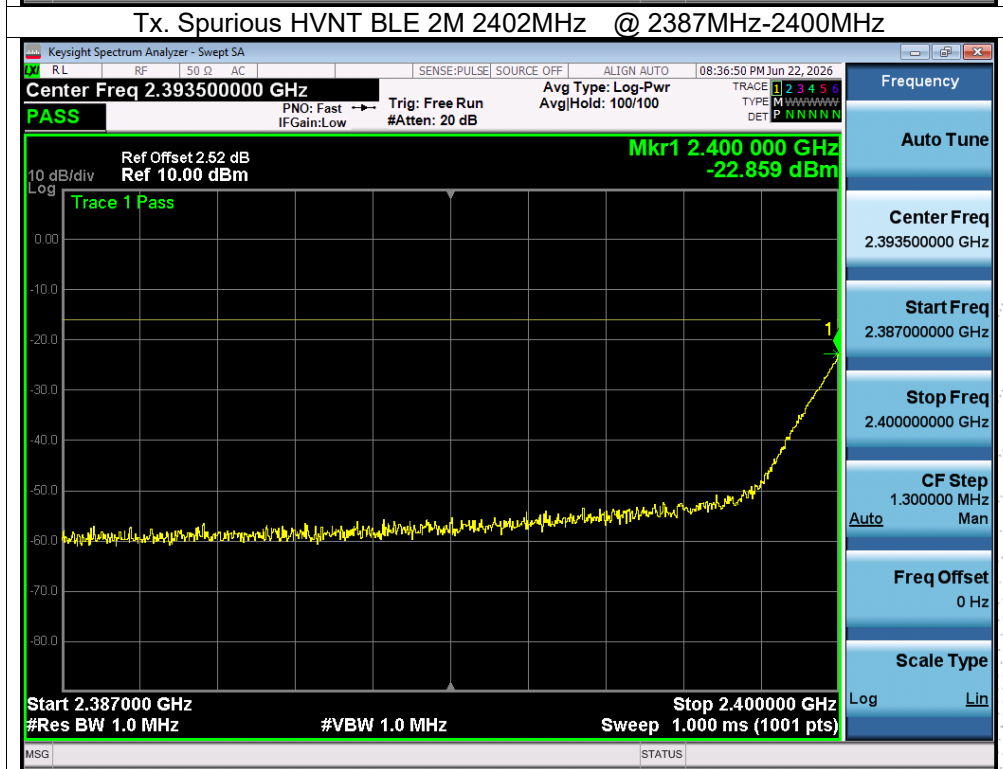
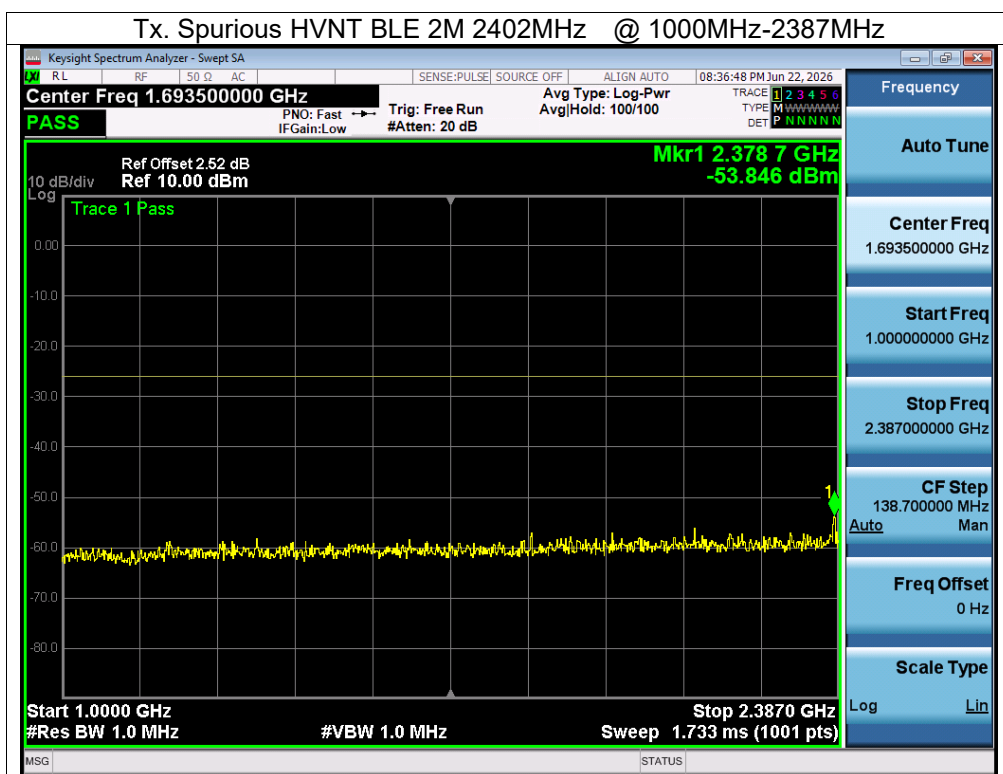


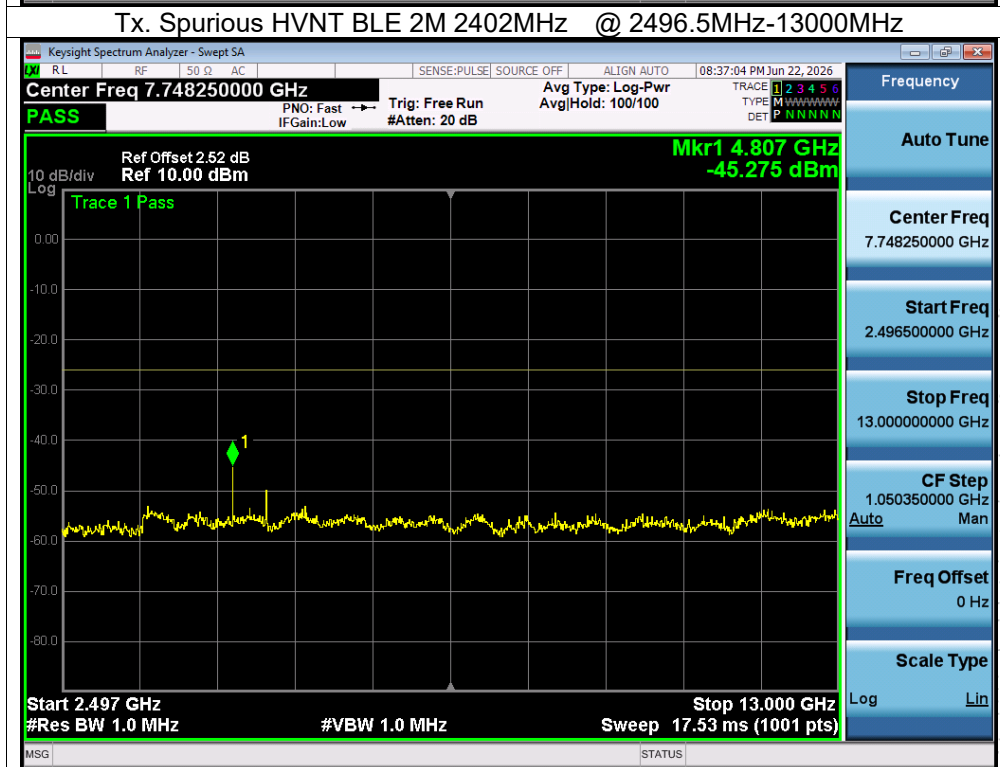
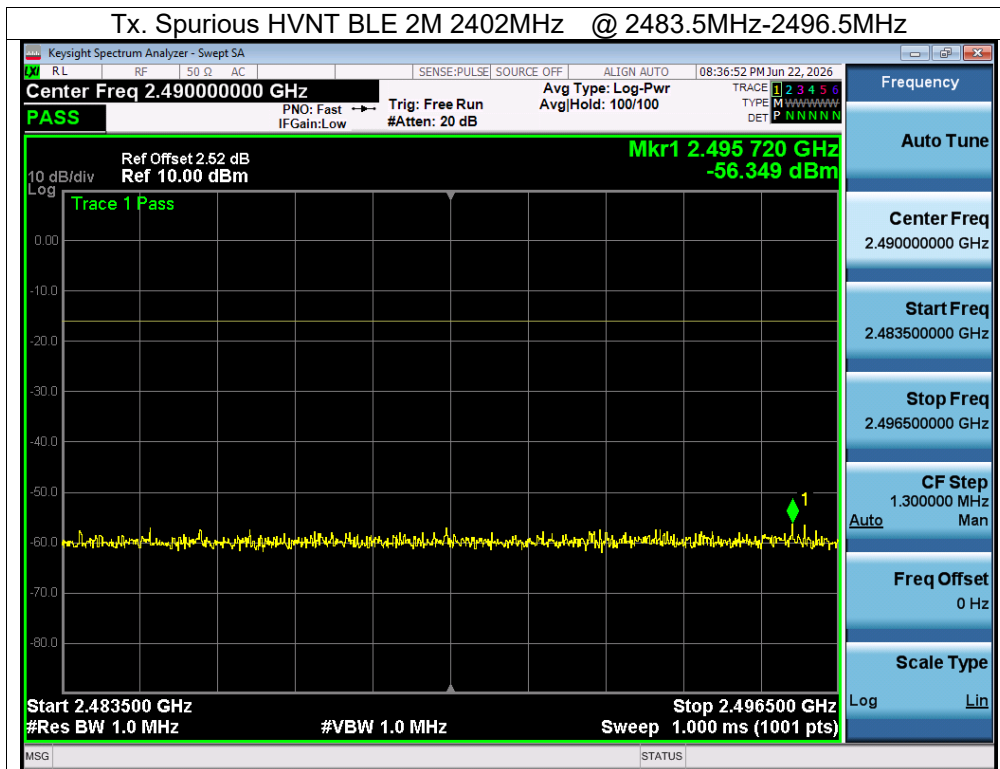


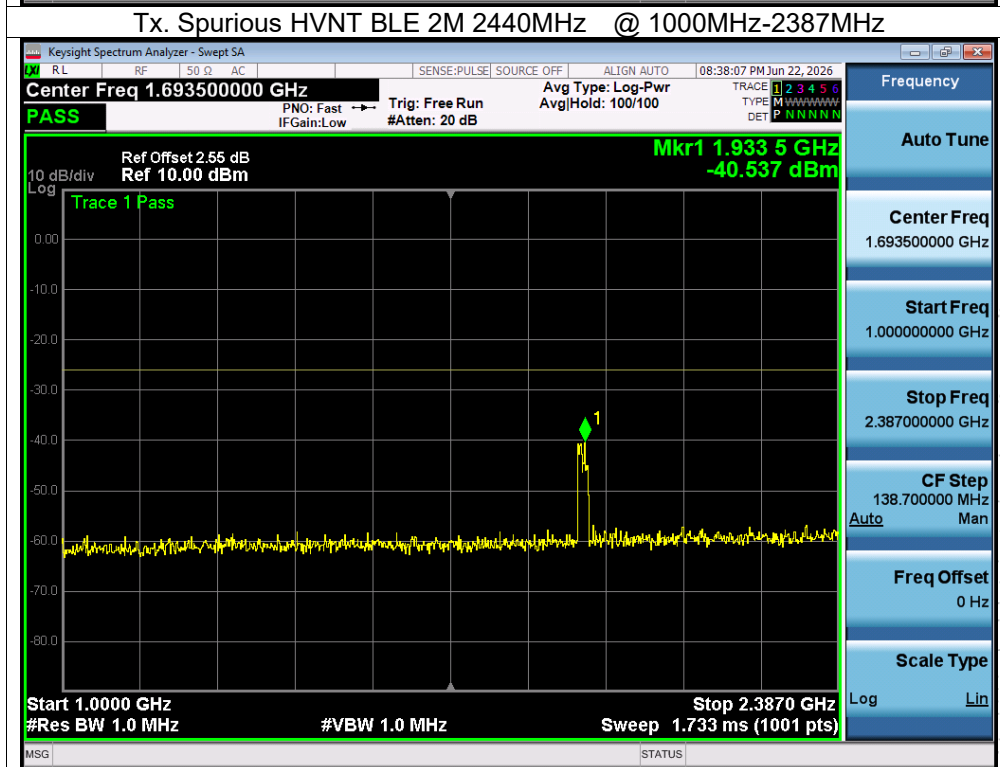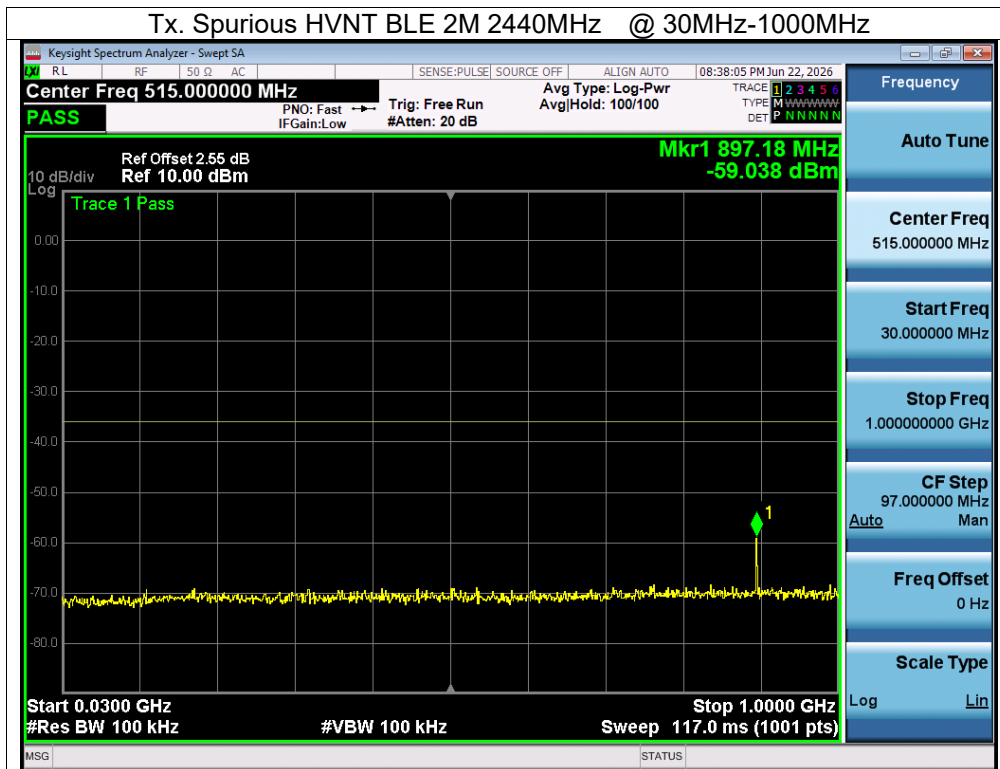

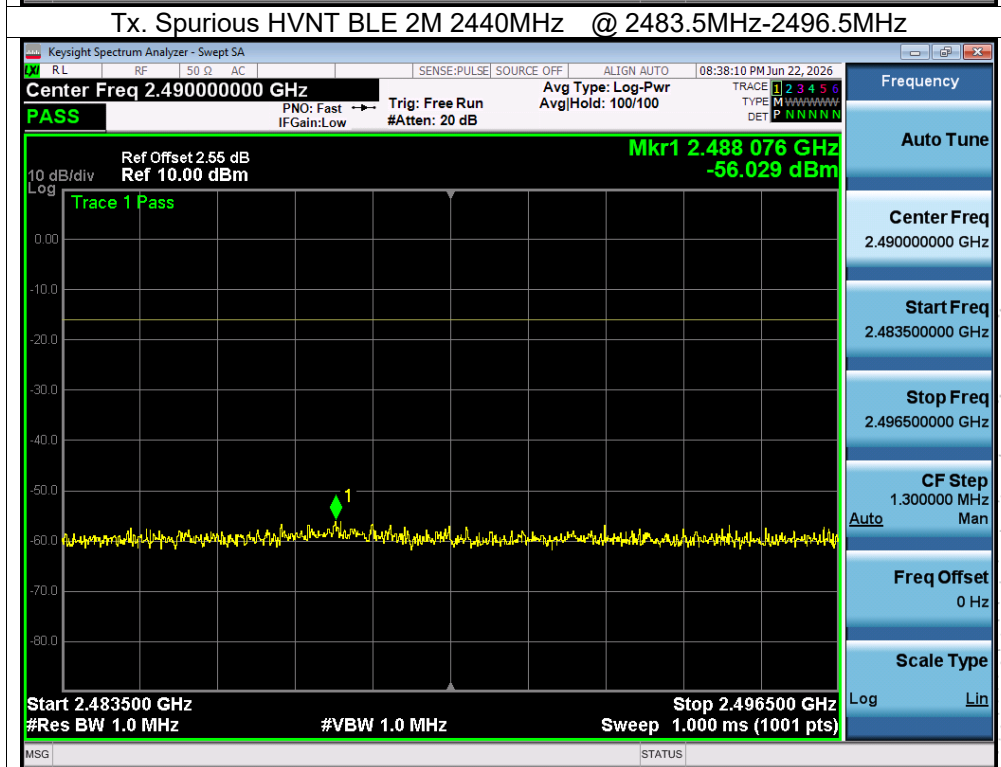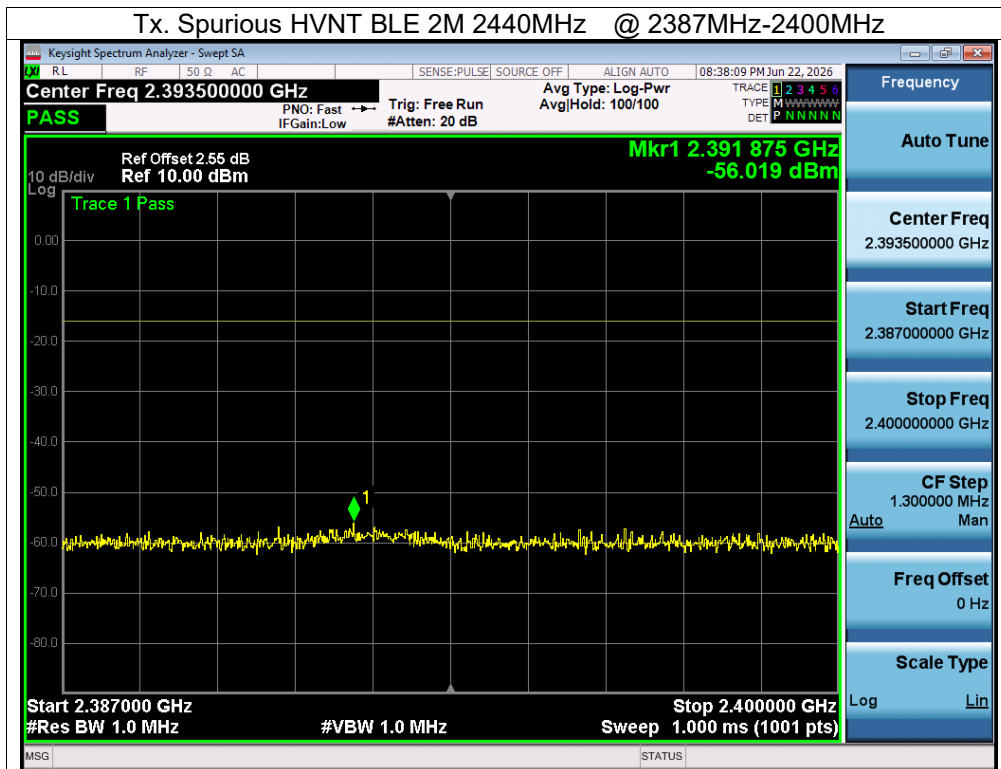

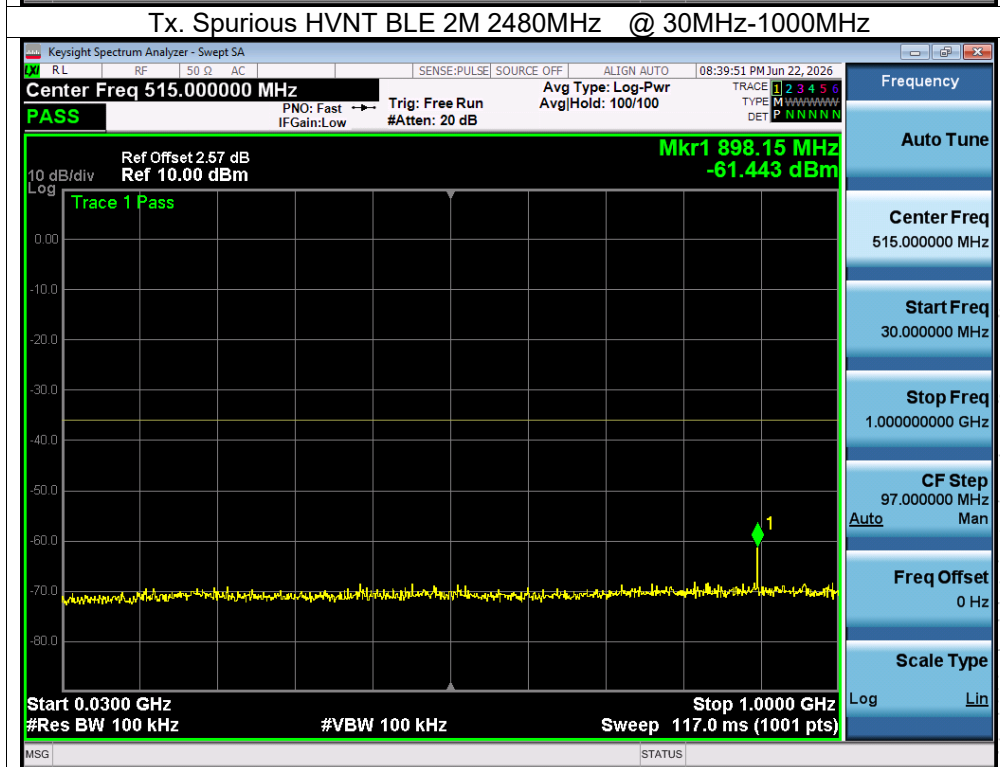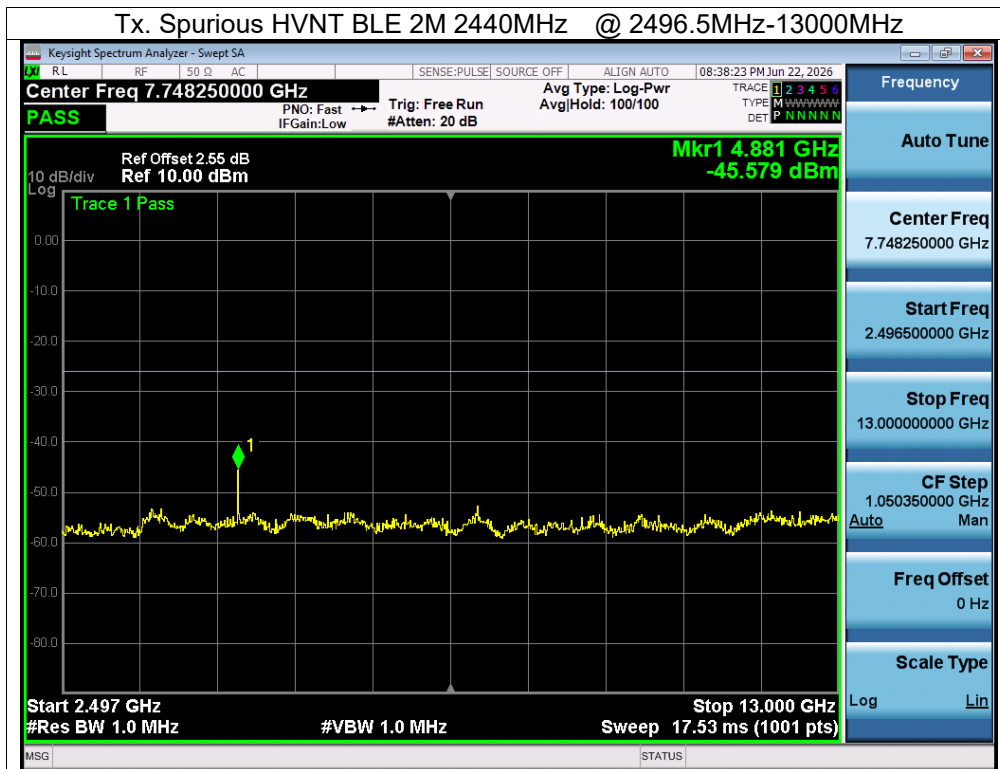


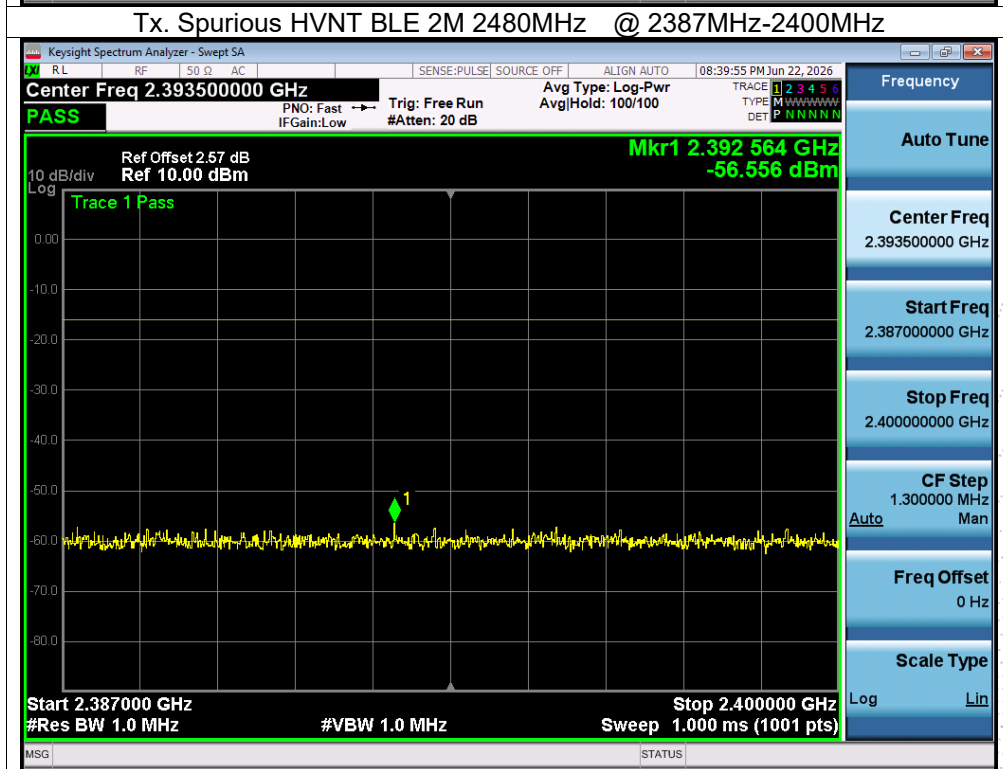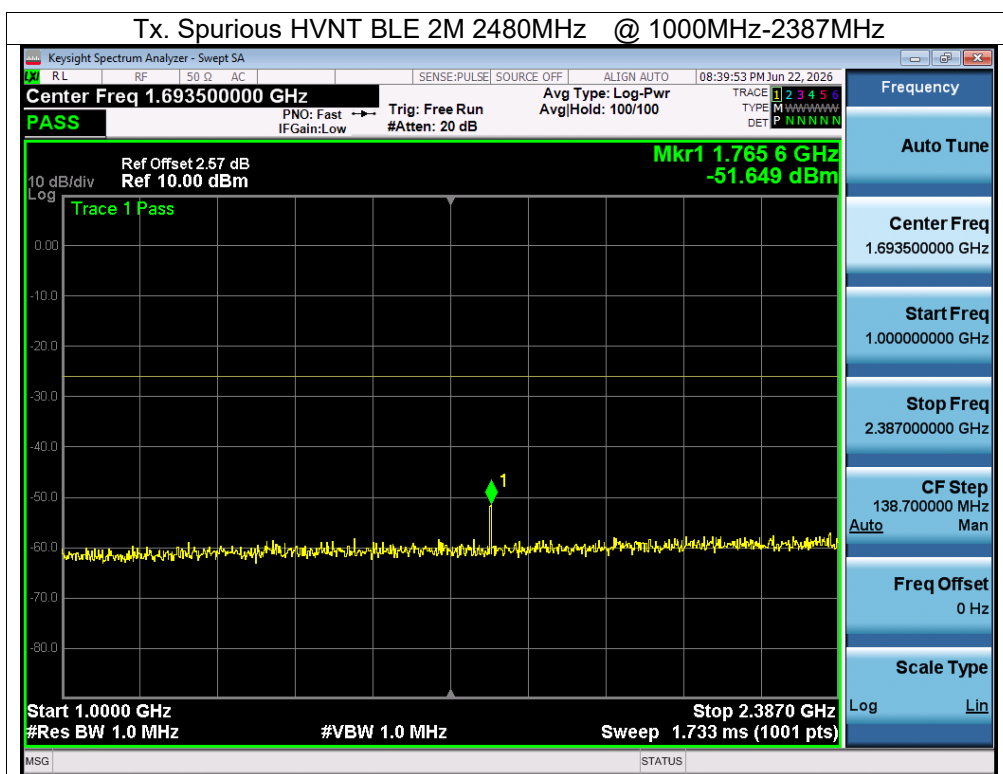

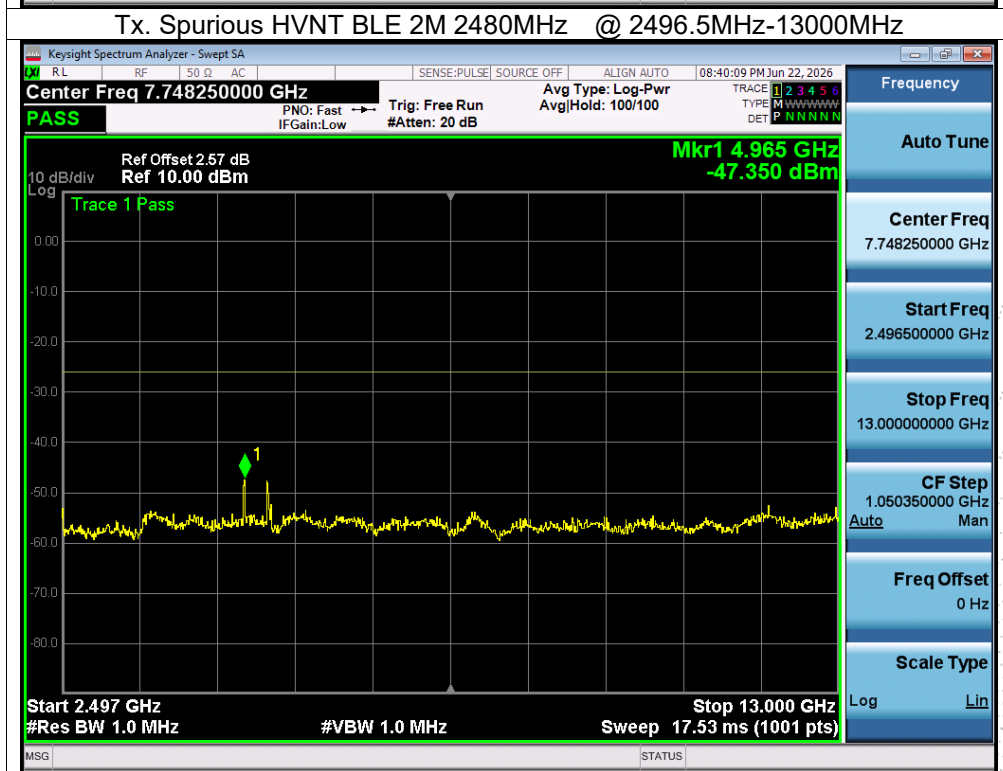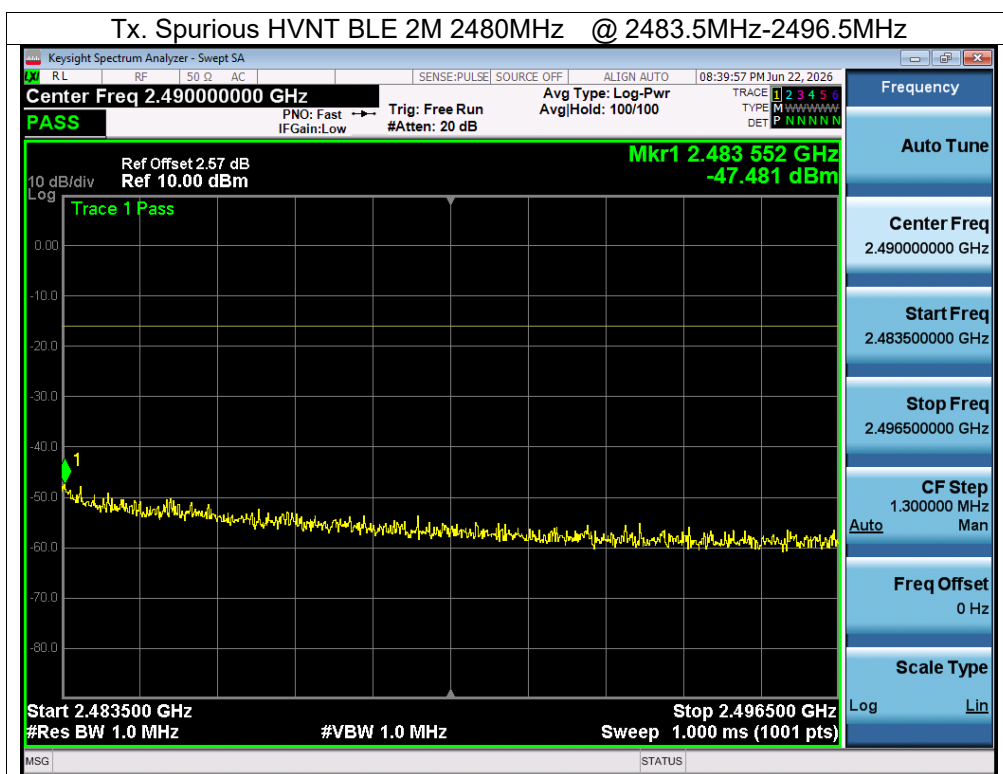

11. Imitation Of Collateral Emission Of Receiver Measurement

11.1 Block Diagram Of Test Setup

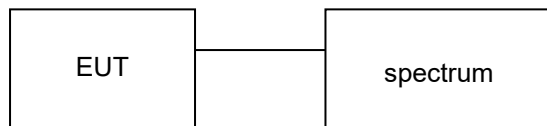

11.2 Limit

Item	Limits
RX Spurious Emission:	$\leq 4\text{nW}$ (-54dBm) ($f < 1\text{GHz}$)
	$\leq 20\text{nW}$ (-47dBm) ($1\text{GHz} \leq f$)

11.3 Measuring Instruments And Setting

Please refer to section 5 in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
RB	100 kHz (below 1GHz emissions) 1 MHz (above 1GHz emissions)
VB	100 kHz (below 1GHz emissions) 1 MHz (above 1GHz emissions)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

11.4 Test procedure


- EUT have the continuous reception mode and fixed only one channelize.
- Setting of SA is following as RB / VB: 100 kHz (below 1GHz emissions) / 1 MHz (above 1GHz emissions) / AT: 6dB / Ref: -20dBm / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold
- SA set RB: 100kHz and VB: 100kHz. Then adjust to start frequency 30MHz and stop frequency 1000MHz. Search to mark peak reading value + cable loss shall be less than 4nW
- SA set RB: 1MHz and VB: 1MHz. Then adjust to start frequency 1000MHz and stop frequency 12500MHz. Search to mark peak reading value + cable loss shall be less than 20nW
- If power level of lower emissions are more than 1/10 of limit (.0.4nW for $f < 1\text{GHz}$, 2nW for $f \geq 1\text{GHz}$), all those are to be indicated in the 2nd and 3rd lines. If others are 1/10 or less more of the limit, no necessary to be indicated.



11.5 Test Result



Temperature:	26°C		
Humidity:	54%RH	Test Voltage	DC 3.7V



Condition	Frequency (MHz)	Range (MHz)	Emission Frequency (MHz)	Max Value (dBm)	Limit (dbm)	Verdict
NVNT	2402	30-1000	951.5	-78.47	-54	Pass
NVNT	2402	1000-13000	2428	-51.03	-47	Pass
NVNT	2440	30-1000	929.19	-78.3	-54	Pass
NVNT	2440	1000-13000	2428	-61.39	-47	Pass
NVNT	2480	30-1000	660.5	-78.01	-54	Pass
NVNT	2480	1000-13000	2428	-54.09	-47	Pass
LVNT	2402	30-1000	783.69	-77.59	-54	Pass
LVNT	2402	1000-13000	5764	-60.16	-47	Pass
LVNT	2440	30-1000	934.04	-78.07	-54	Pass
LVNT	2440	1000-13000	5692	-62.99	-47	Pass
LVNT	2480	30-1000	544.1	-78.06	-54	Pass
LVNT	2480	1000-13000	12220	-63.52	-47	Pass
HVNT	2402	30-1000	540.22	-78.26	-54	Pass
HVNT	2402	1000-13000	5644	-63.11	-47	Pass
HVNT	2440	30-1000	481.05	-78.14	-54	Pass
HVNT	2440	1000-13000	12472	-63.65	-47	Pass
HVNT	2480	30-1000	204.6	-78.38	-54	Pass
HVNT	2480	1000-13000	5776	-63.26	-47	Pass



SHENZHEN

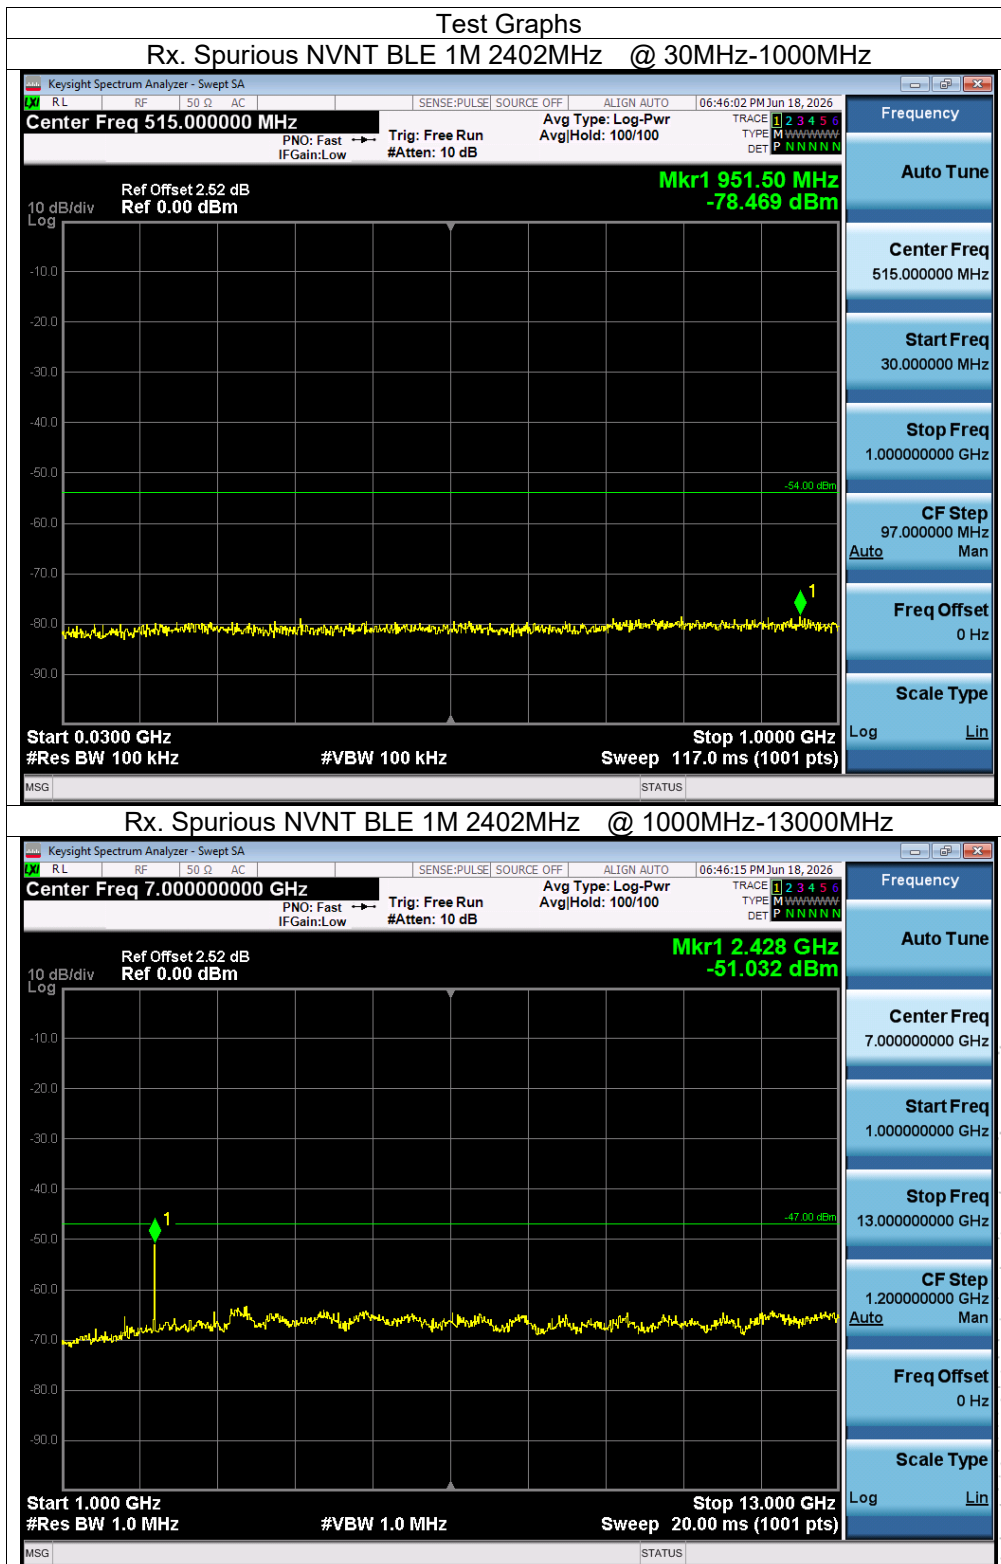

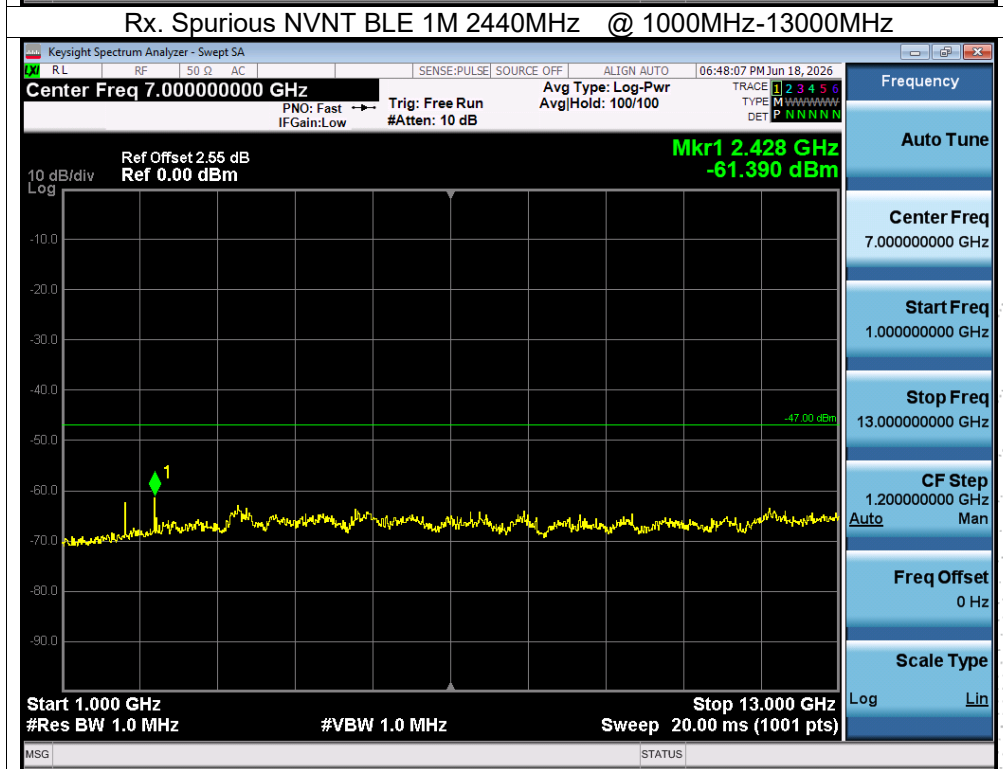
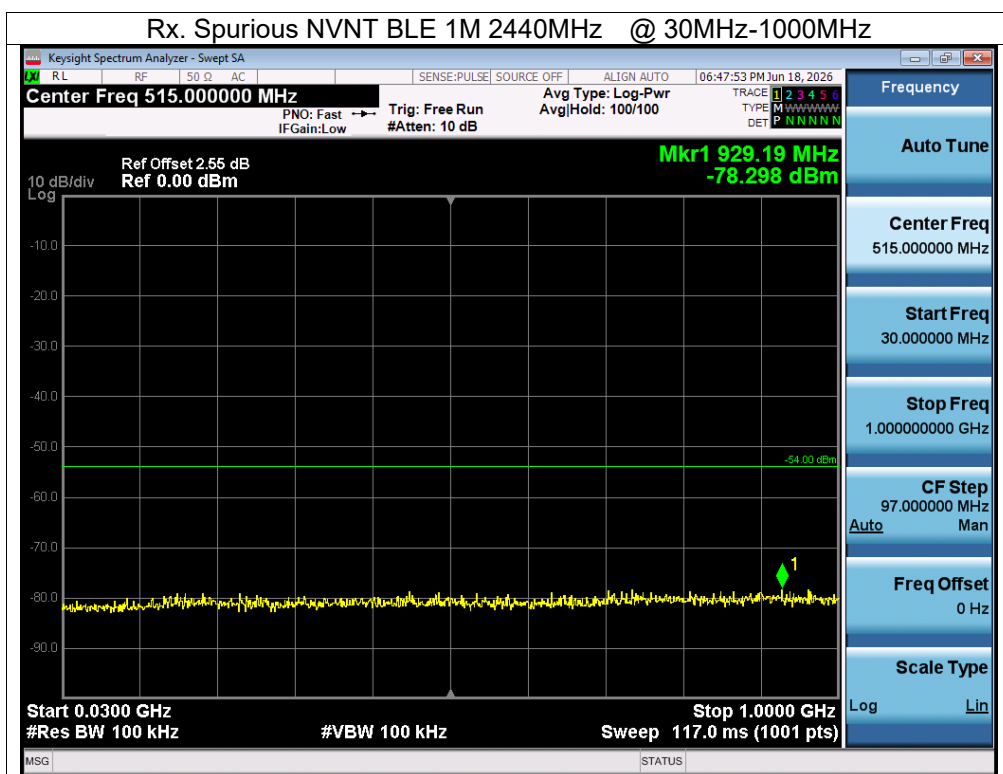


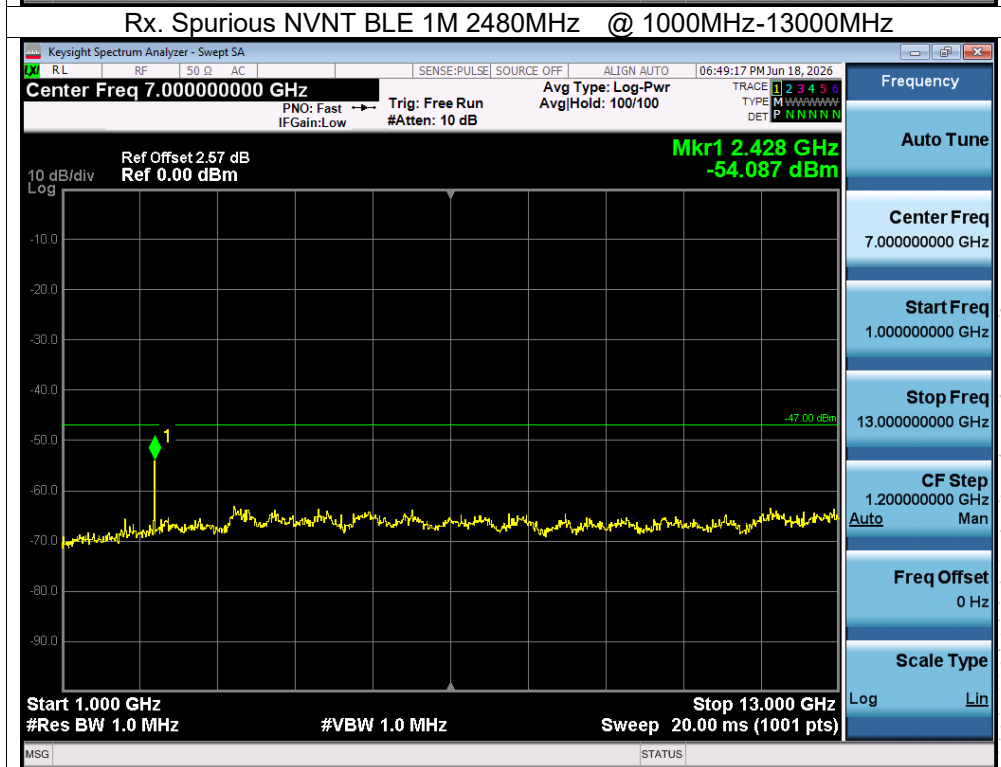
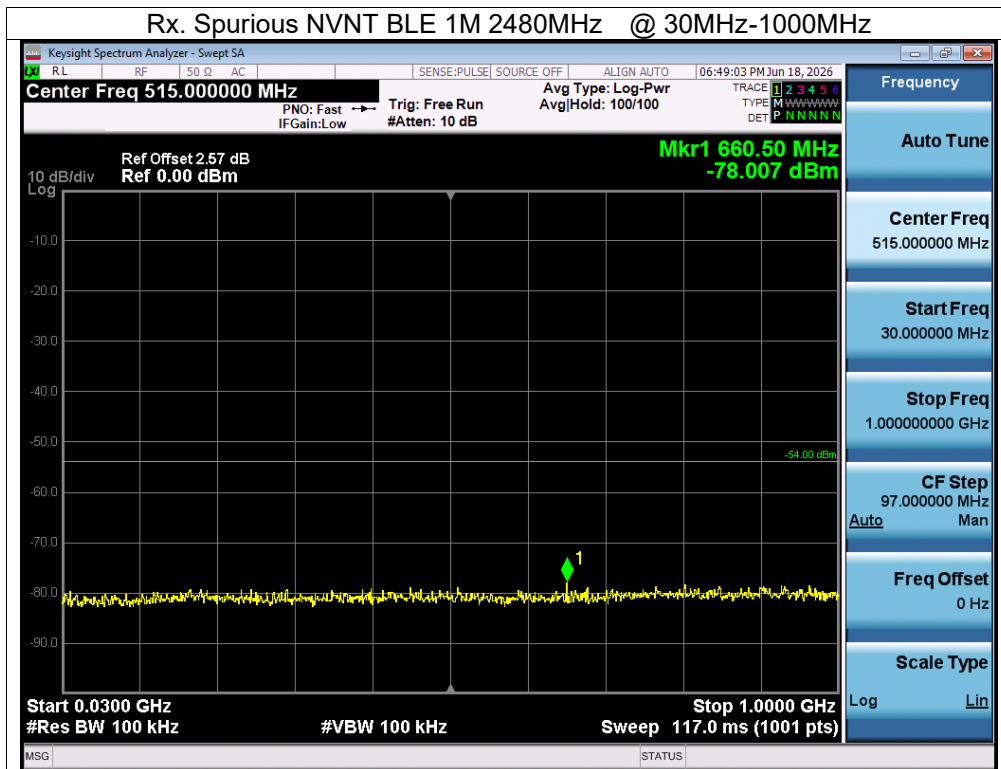


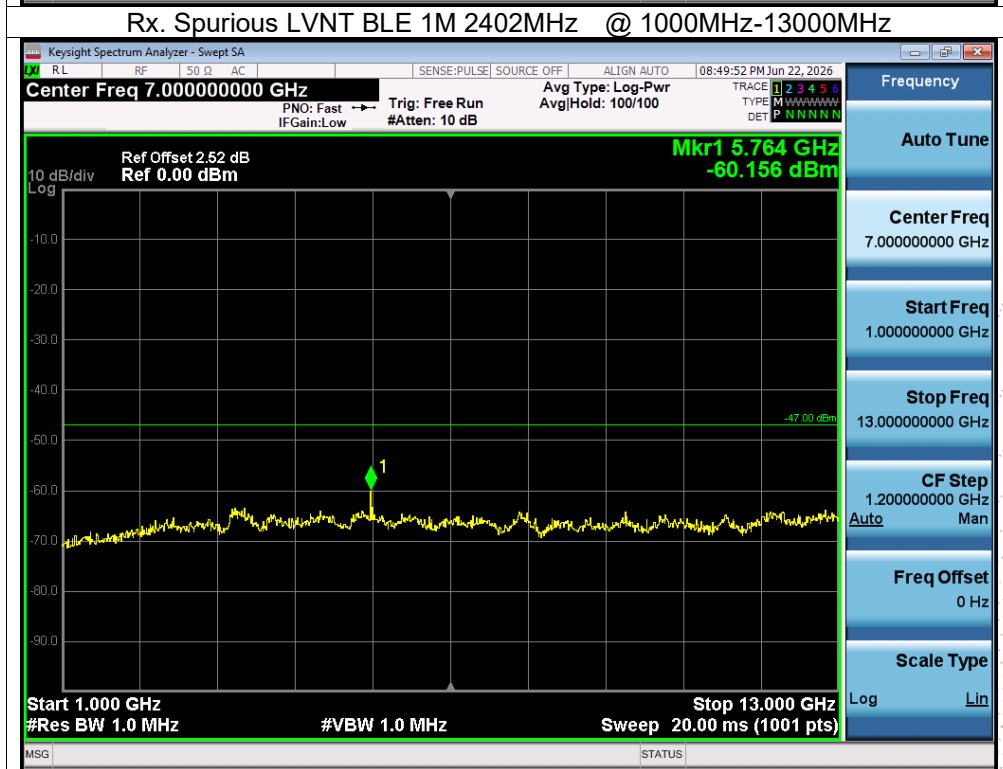
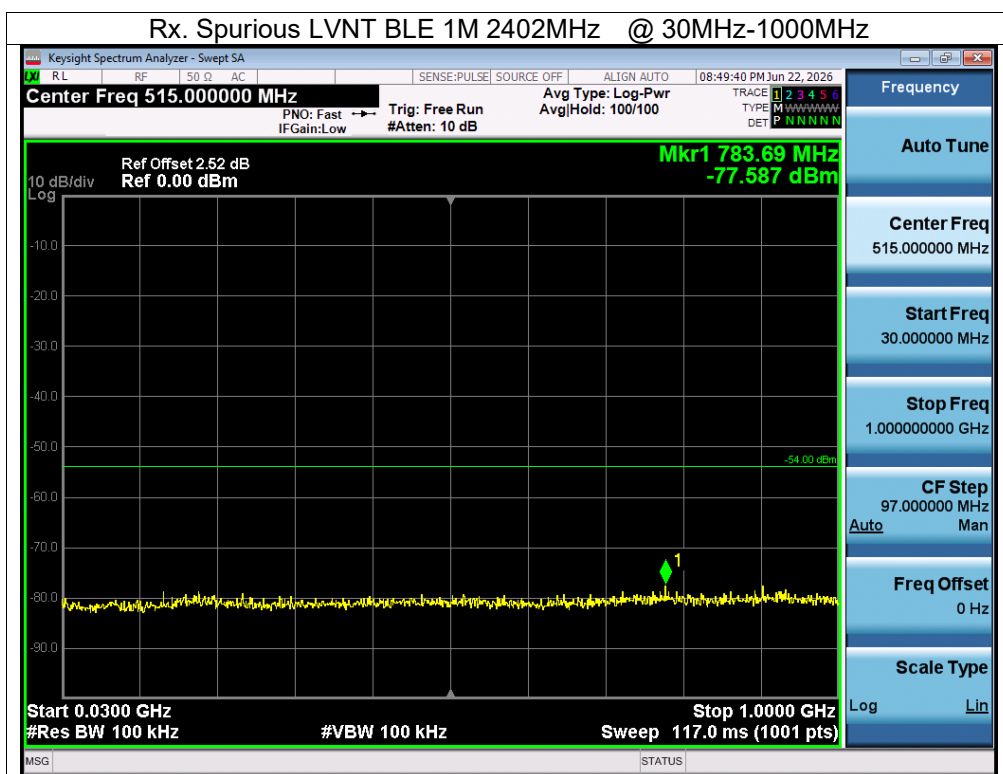


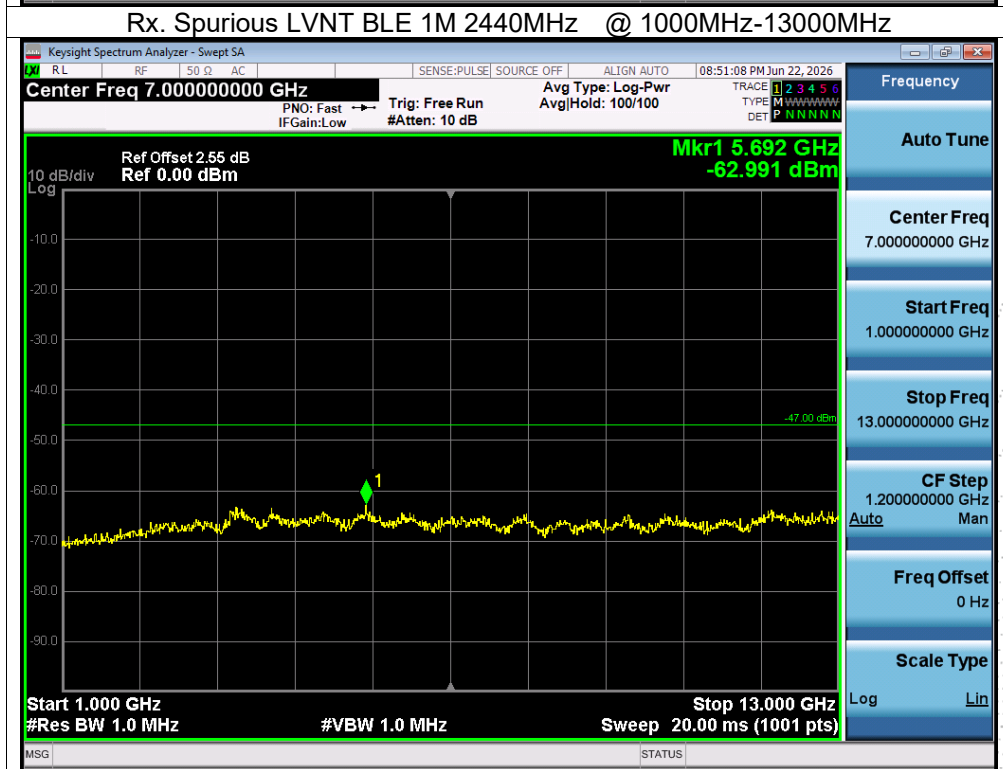
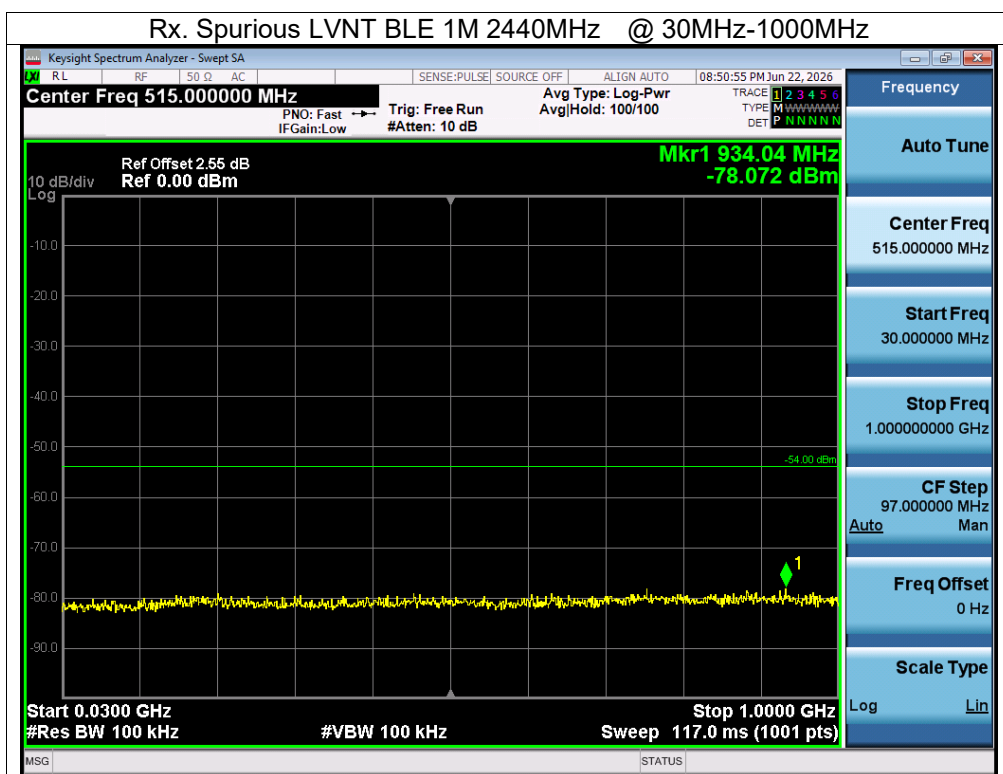


CO.LTD

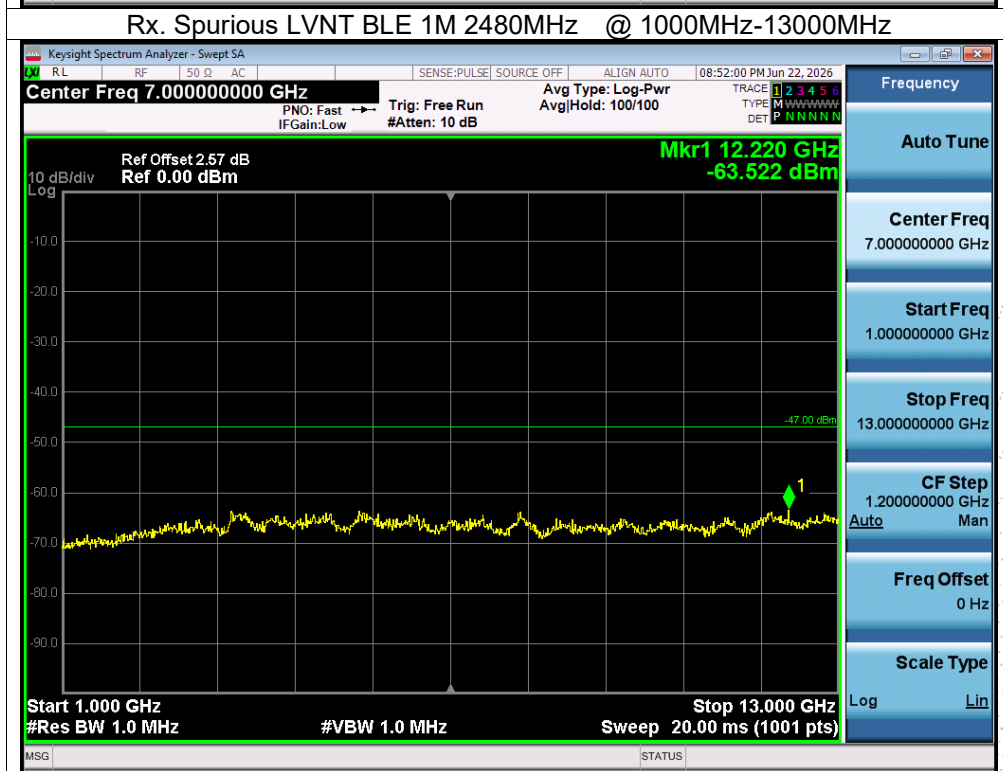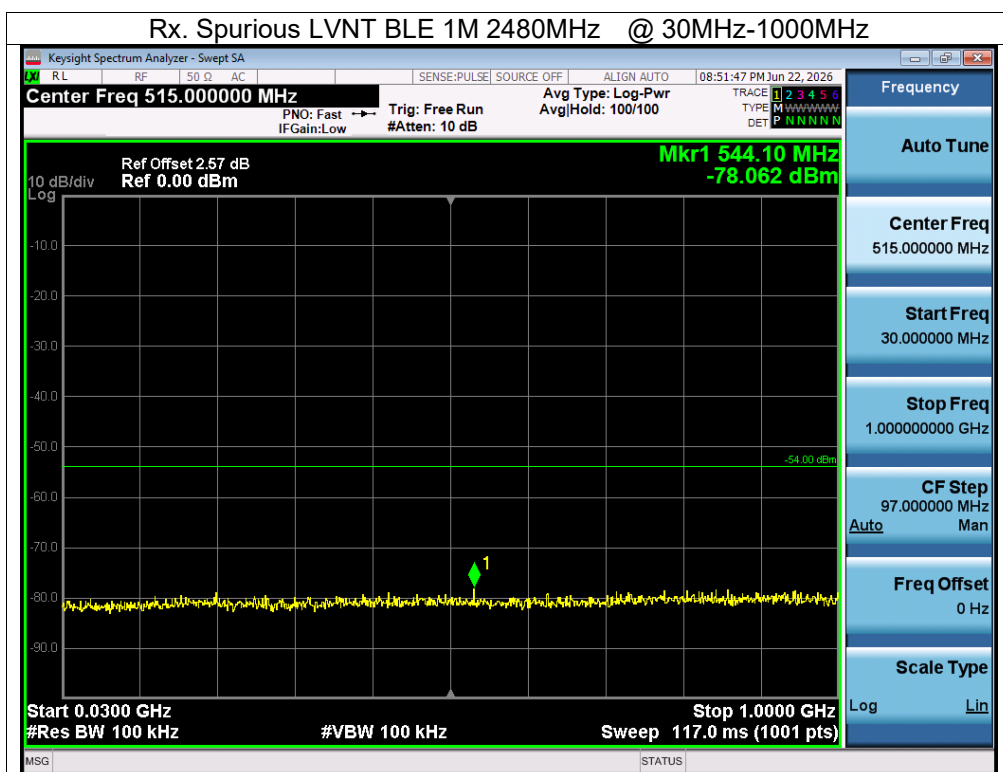

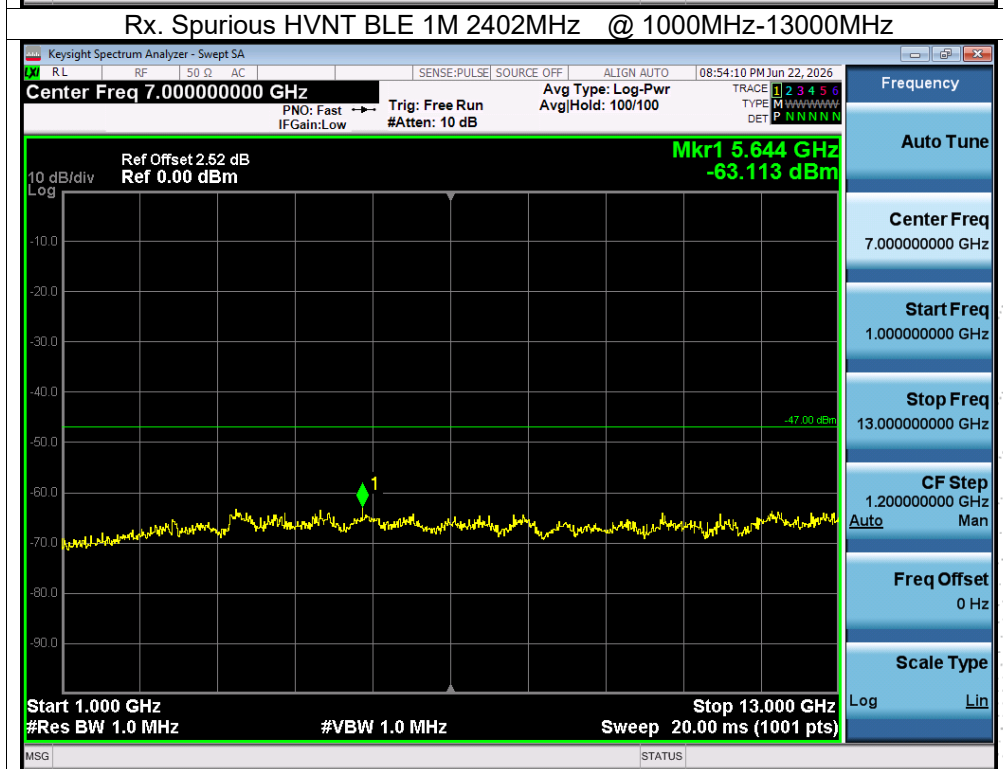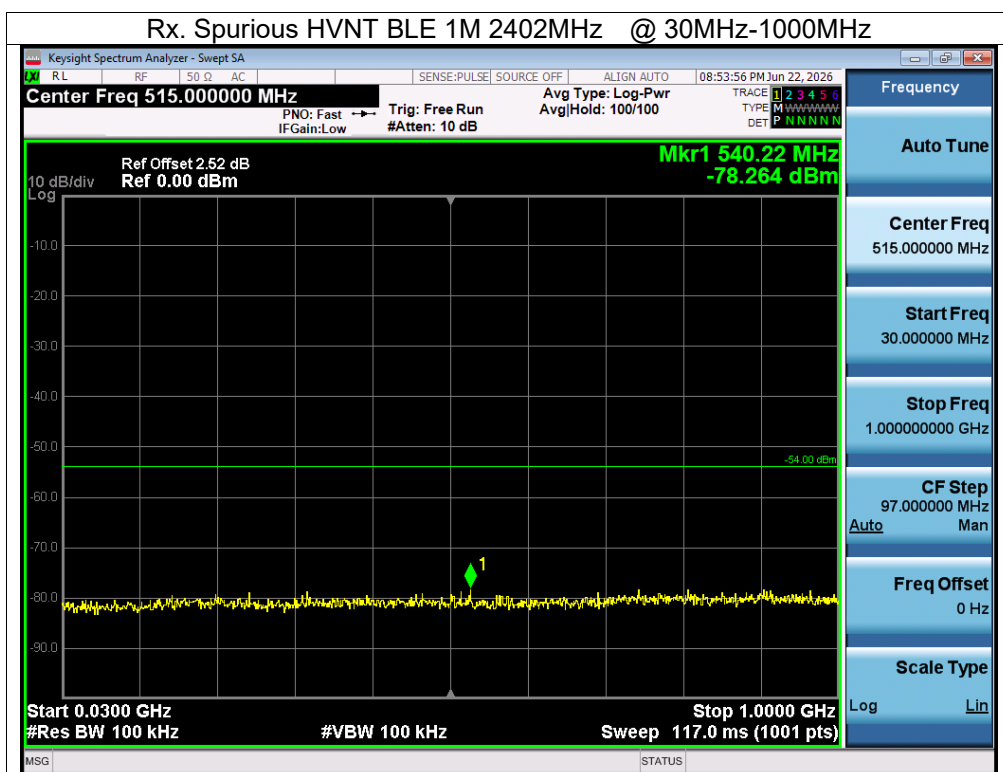

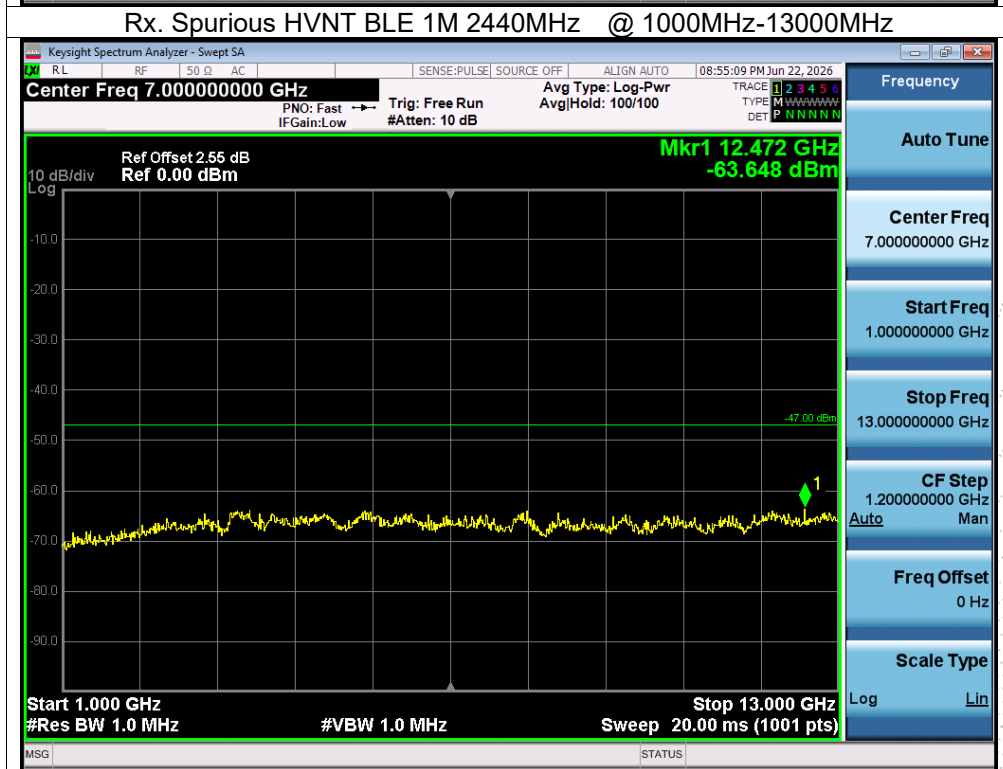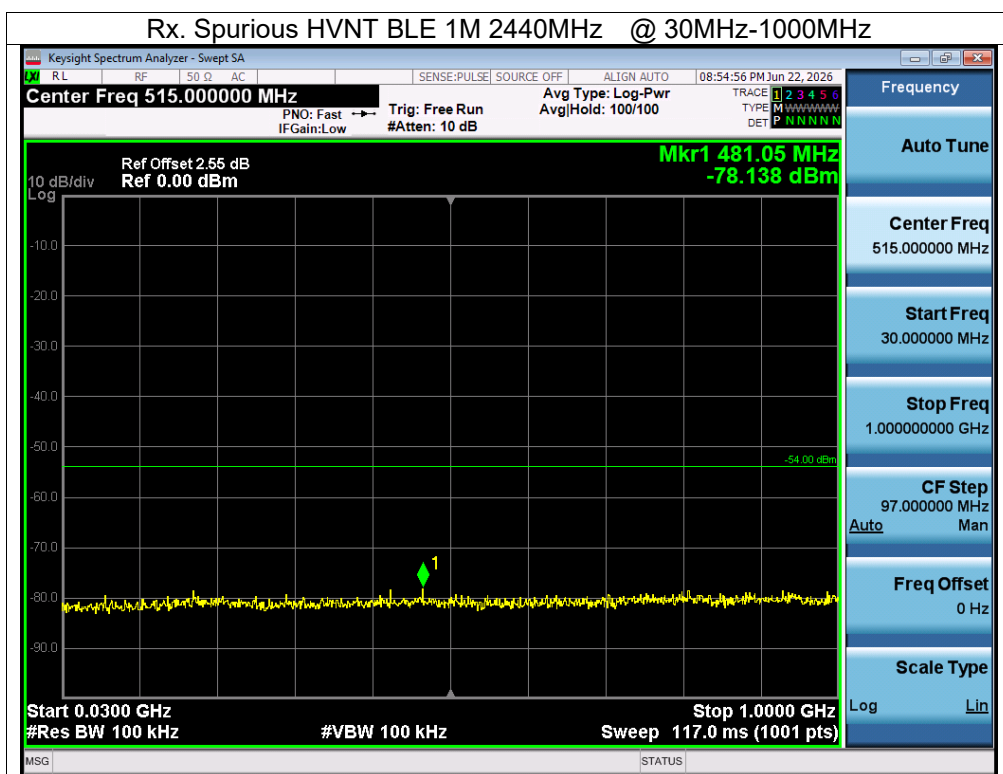


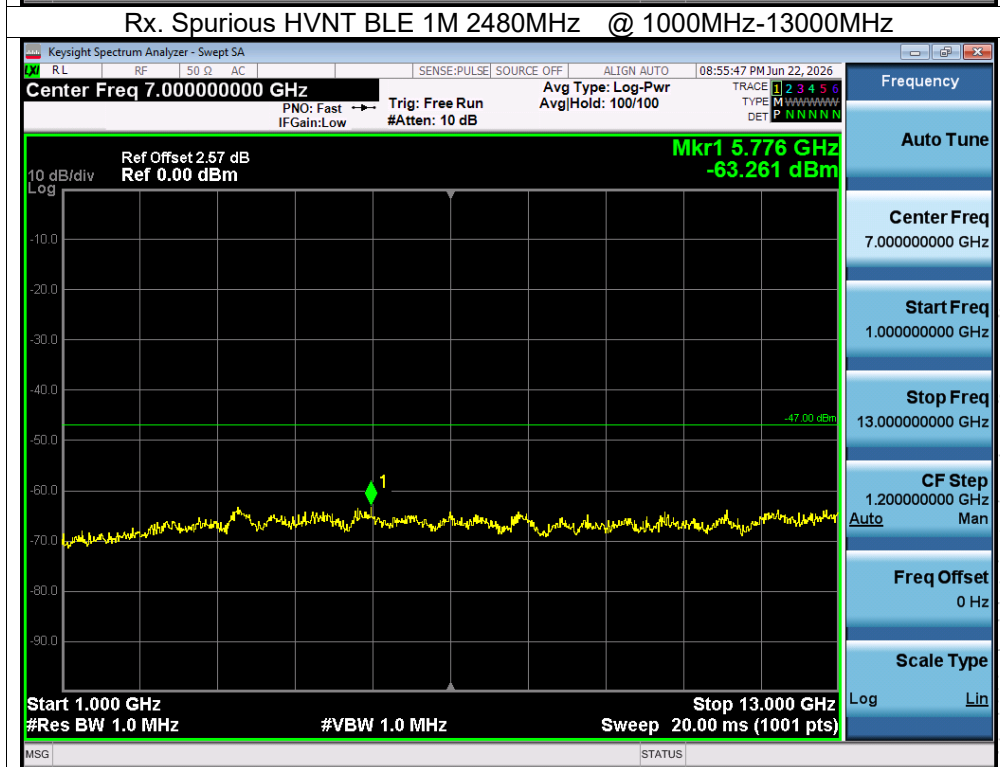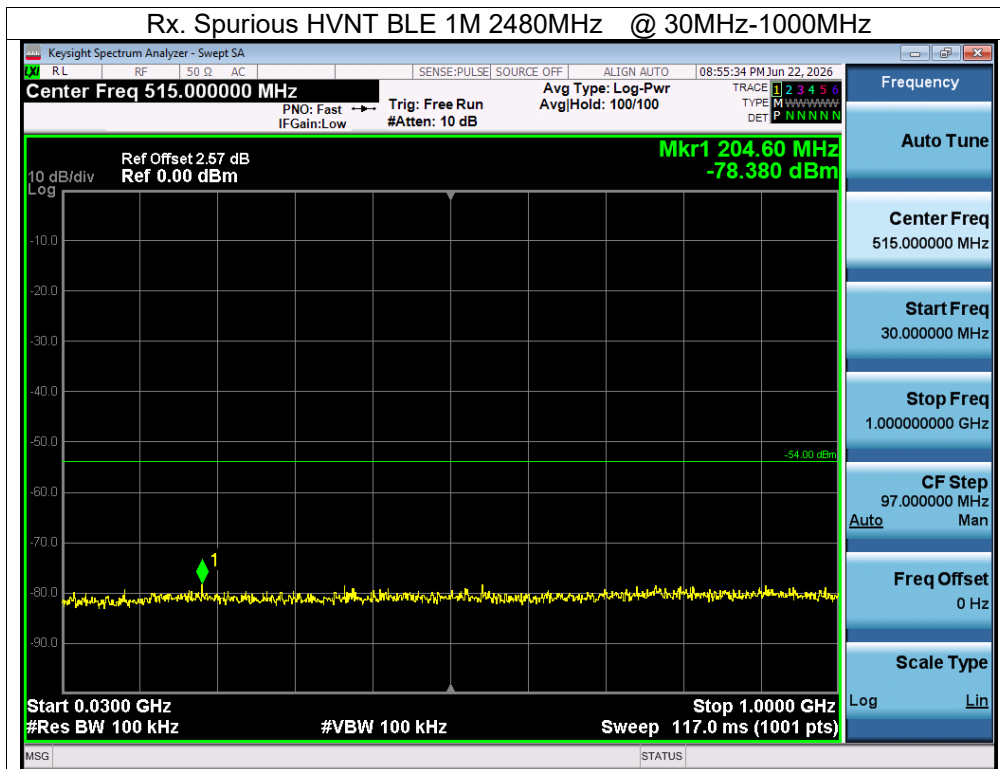


12. Transmission Antenna Gain (EIRP Antenna Power) Measurement

12.1 Block Diagram Of Test Setup

For EUT radiation measurement

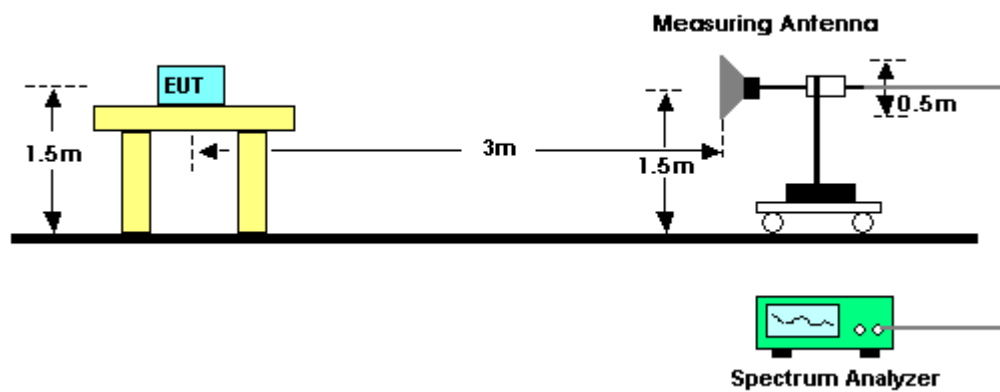

For standard antenna measurement

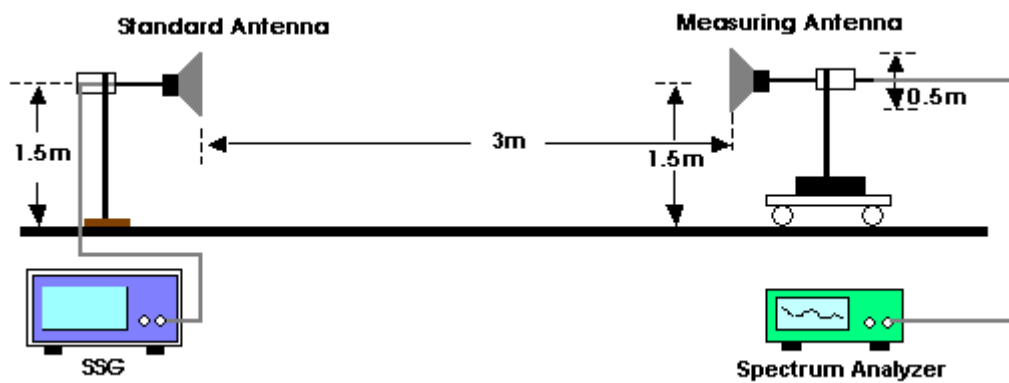

12.2 Limit

Item	Limits
EIRP Power Density	$\leq 16.91 \text{ dBm/MHz}$ (FH form 2427 - 2470.75 MHz) $\leq 22.14 \text{ dBm/MHz}$ (OFDM, DS from 2400~2483.5MHz) $\leq 22.14 \text{ dBm}$ (Other from 2400~2483.5MHz)
Note: This test item is not applied for radio equipment with equivalent isotropic radiation power lower than 12.14dBm/MHz, but Antenna Power(Conducted) limit is 10 mW/MHz (10 dBm/MHz), So the test item will not be applied to the transmission antenna which has a gain of 2.14dBi or less	

12.3 Measuring Instruments And Setting

Please refer to section 5 in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
RB/VB	1 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

12.4 Test procedure


1. Set EUT ad measuring antenna at the same height and roughly facing each other.
2. Move the measuring antenna height up and down within $\pm 50\text{cm}$ of EUT height and swing it to find the maximum output of the measuring antenna. The output level at the spectrum analyzer is read sa "E".
3. Remove the EUT from the turn table and put the replacing antenna facing to measuring antenna at same height. Set the standard signal generator (SSG) at same frequency and transmit on then receive the signal
4. Swing the replacing antenna give a maximum receiving level.
5. Move the measuring antenna height up and down within $\pm 50\text{cm}$ of replacing antenna height and swing it to find the maximum receiving level.
6. Set SSG output power at Pt to give the equivalent output level of "E" or caluate Pt with SSG output which gives the nearest of "E" and difference ($\pm 1\text{dB}$). Record the Pt.
7. Calculate EIRP by the formula below $\text{EIRP} = \text{Gt} - \text{L} + \text{Pt}$.
Gt: gain of replacing antenna (dBi)
L: feeder loss between SSG and replacing antenna
Pt: Output power of the SSG
8. If the antenna for the EUT has circular polarization, sum of V-field and H-field will be result if measuring antenna is linear polarization.

12.5 Test Result

The test item will not be applied to the transmission antenna which has a gain of 2.14dBi or less.

13. Transmission Radiation Angle Width (3db Beamwidth) Measurement

13.1 Block Diagram Of Test Setup

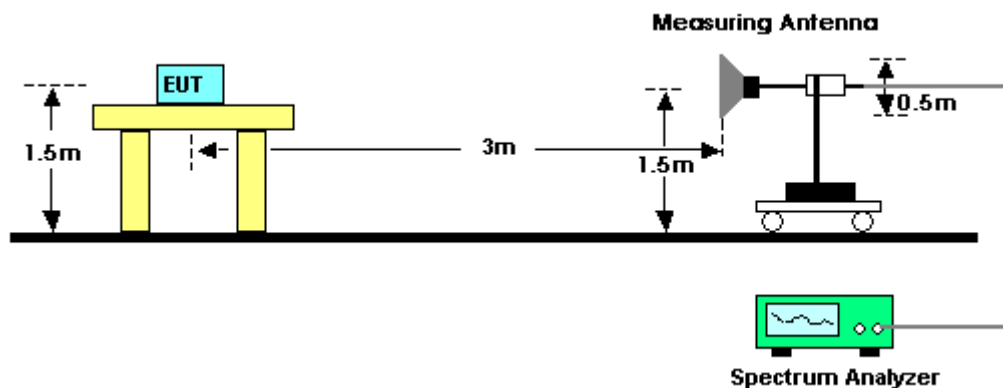

13.2 Limit

Item	Limits
3dB antenna beam width	360/A (If A<1; then A=1)
Note: A = E.I.R.P. / (2.14dBi + "Antenna Power (limit)" of each modulation method (*3mW/MHz, 10mW/MHz, etc.))	

13.3 Measuring Instruments And Setting

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	0 MHz
RB	1 MHz
VB	1 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

13.4 Test procedure


1. Set EUT and measuring antenna at the same height and roughly facing each other.
2. Set spectrum analyzer with condition in section 4.7.2 and tune reference level to observe receiving signal position.
3. Rotate directions of the EUT horizontally and vertically to find the maximum receiving power.
4. Move the measuring antenna height up and down within $\pm 50\text{cm}$ of EUT height and swing it to find the maximum output of measuring antenna. The output level at the spectrum analyzer is read as "E".
5. Calculate permitted radiation angle in horizontal and vertical using EIRP measured in another test method.
6. Calculate 3dB antenna beam width by the formula below $360/A$ (If $A < 1$; then $A = 1$).

13.5 Test Result

N/A

14. Radio Interference Prevention Capability Measurement

14.1 Block Diagram Of Test Setup

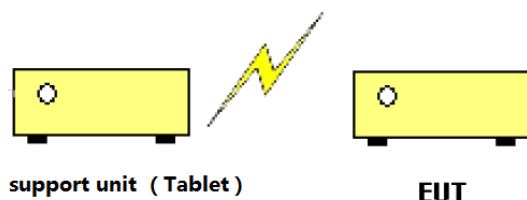

14.2 Limit

Item	Limits
Identification code	≥ 48 bits

14.3 Measuring Instruments And Setting

Item	Limits
MAC IP List	MAC Scan

14.4 Test procedure

1. In the case that the EUT has the function of automatically transmitting the identification code:
 - a. Transmit the predetermined identification codes from EUT.
 - b. Check the transmitted identification codes with the demodulator.
2. In the case of receiving the identification code:
 - a. Transmit the predetermined identification codes from the counterpart.
 - b. Check if communication is normal.
 - c. Transmit the signals other than predetermined ID codes from the counterpart.
 - d. Check if the EUT stops the transmission, or if it displays that identification codes are different from the predetermined ones.


14.5 Test Result

Temperature:	26 °C		
Humidity:	54%RH	Test Voltage:	DC 3.7V
Operation Mode:	GFSK	Test result:	PASS

Bluetooth Device Address: E6:5B:90:11:E8:01

15. EUT Photographs



EUT Photo

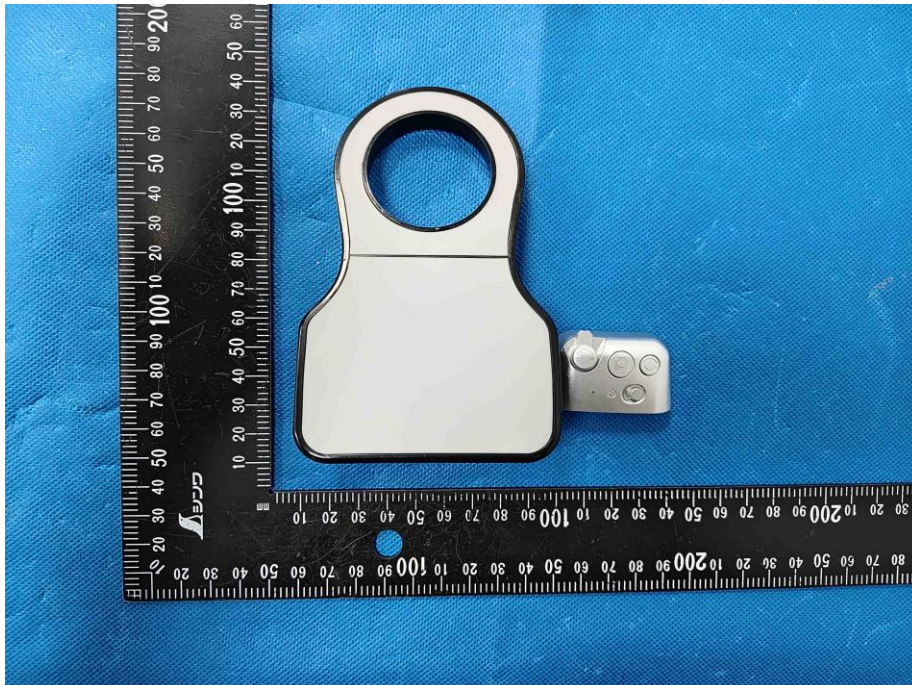

NOTE: Appendix-Photographs Of EUT Constructional Details
(L-ASH01 _External & Internal Photos)

16. EUT Test Setup Photographs

Measurement Photos

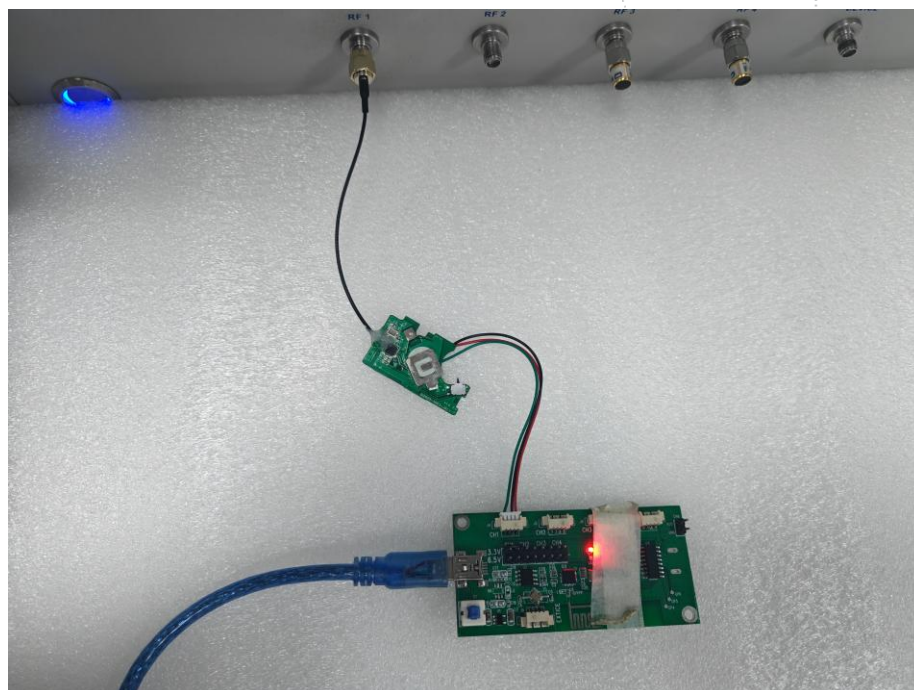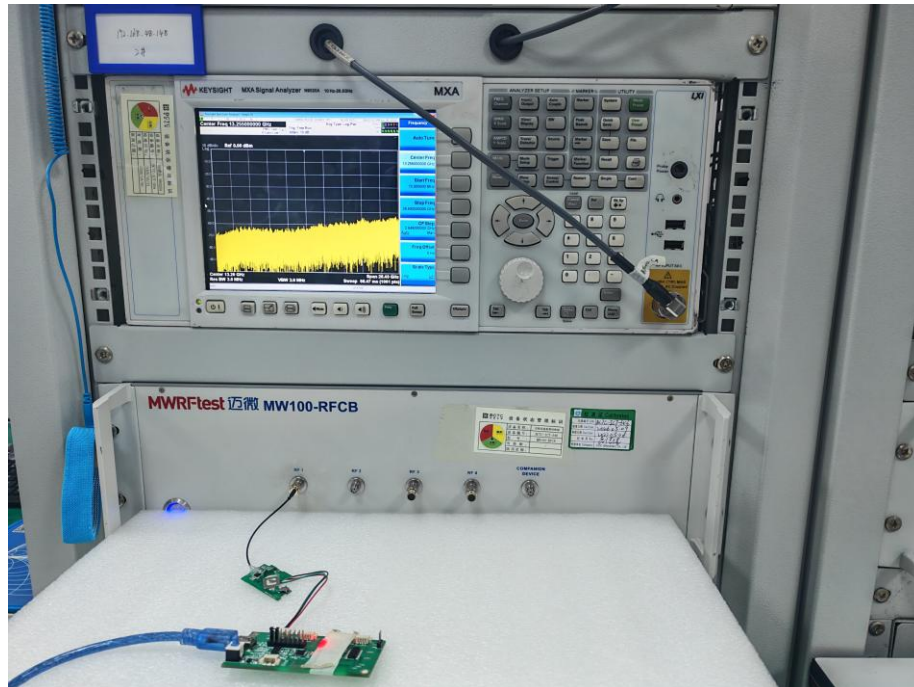

ESTIM
C
VED
eal

STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

Consultation E-mail: bctc@bctc-lab.com.cn

Complaint/Advice E-mail: advice@bctc-lab.com.cn

***** END *****

ing
CO., LTD