


Applicant : Wuxi Yingzhen Technology Co., Ltd.


Product Name : Stick Logger(WiFi)

1. Frequency Error


Condition	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	2412	Ant1	2411.989	-11000	-4.56	50	Pass
NVNT	2442	Ant1	2441.996	-4000	-1.64	50	Pass
NVNT	2472	Ant1	2471.997	-3000	-1.21	50	Pass
NVNT	2422	Ant1	2421.99	-10000	-4.13	50	Pass
NVNT	2442	Ant1	2441.989	-11000	-4.5	50	Pass
NVNT	2462	Ant1	2461.99	-10000	-4.06	50	Pass

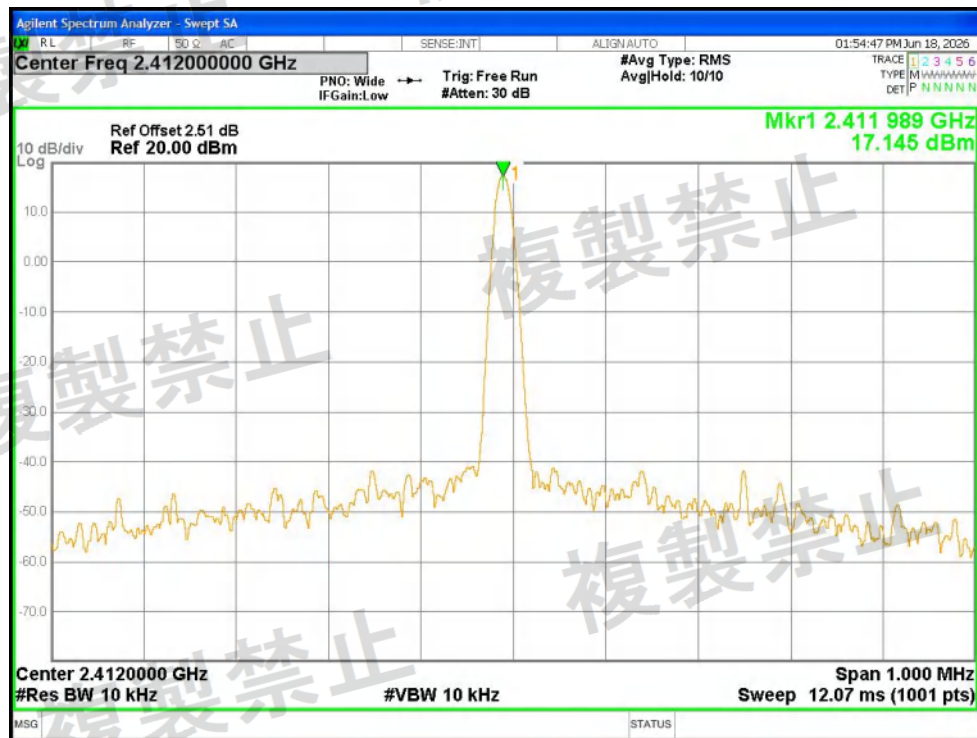


Freq. Error NVNT b 2412MHz Ant1

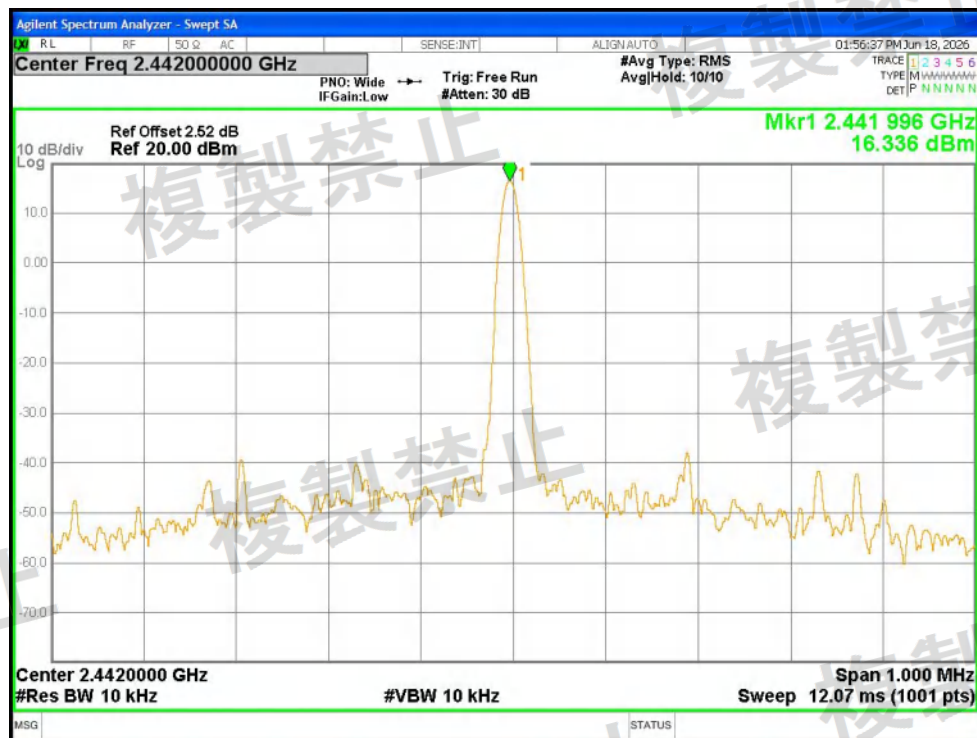


Freq. Error NVNT b 2442MHz Ant1

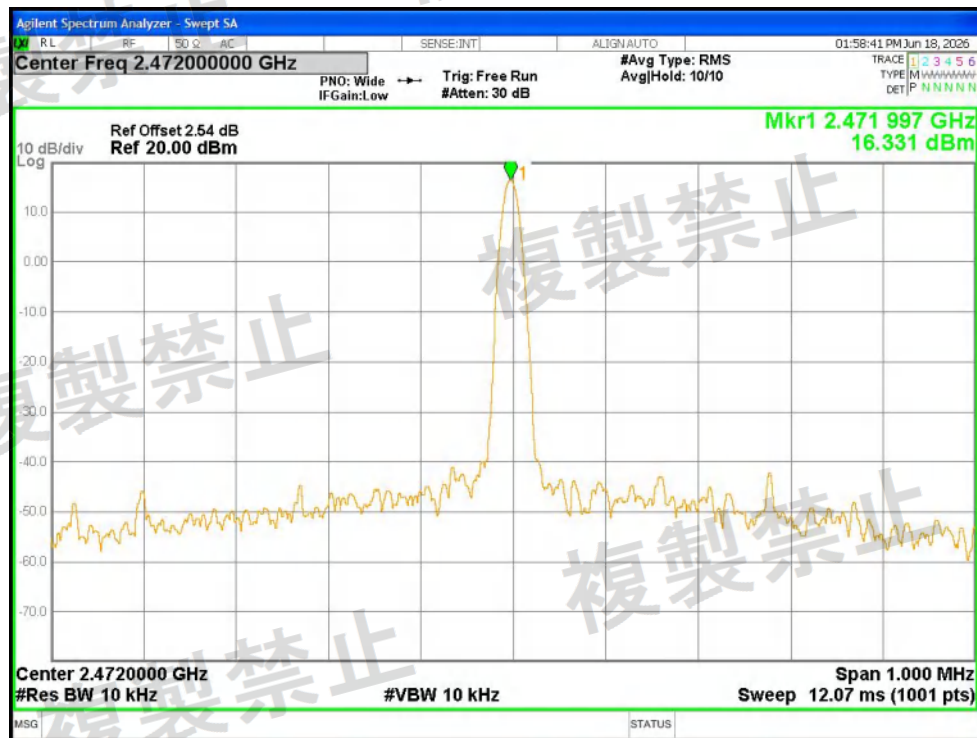


Freq. Error NVNT b 2472MHz Ant1

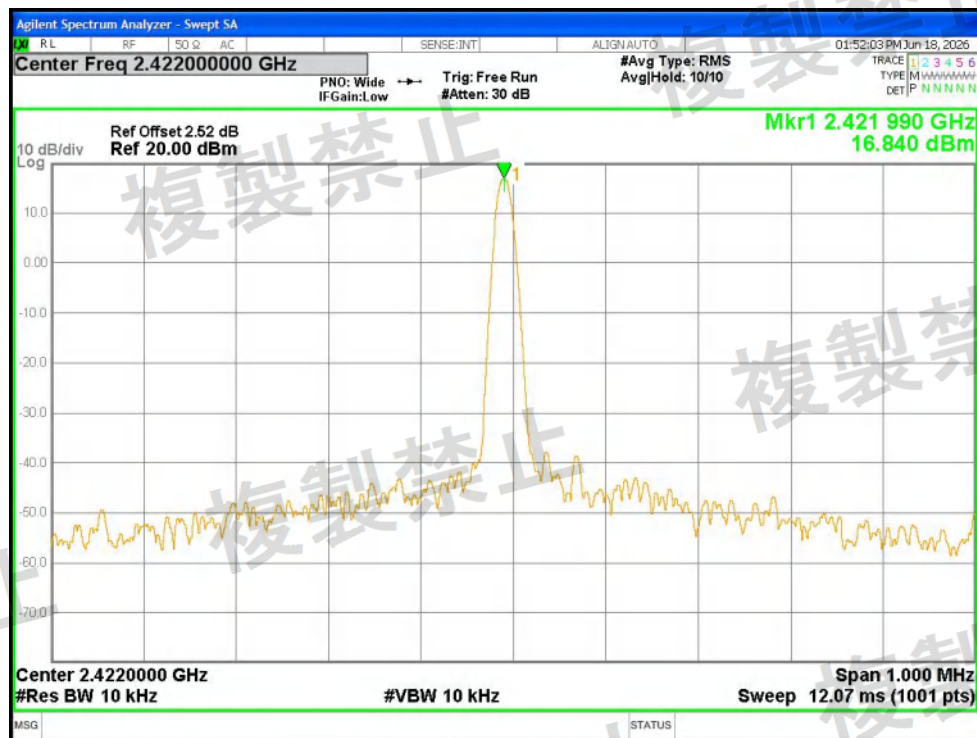

Freq. Error NVNT n40 2422MHz Ant1

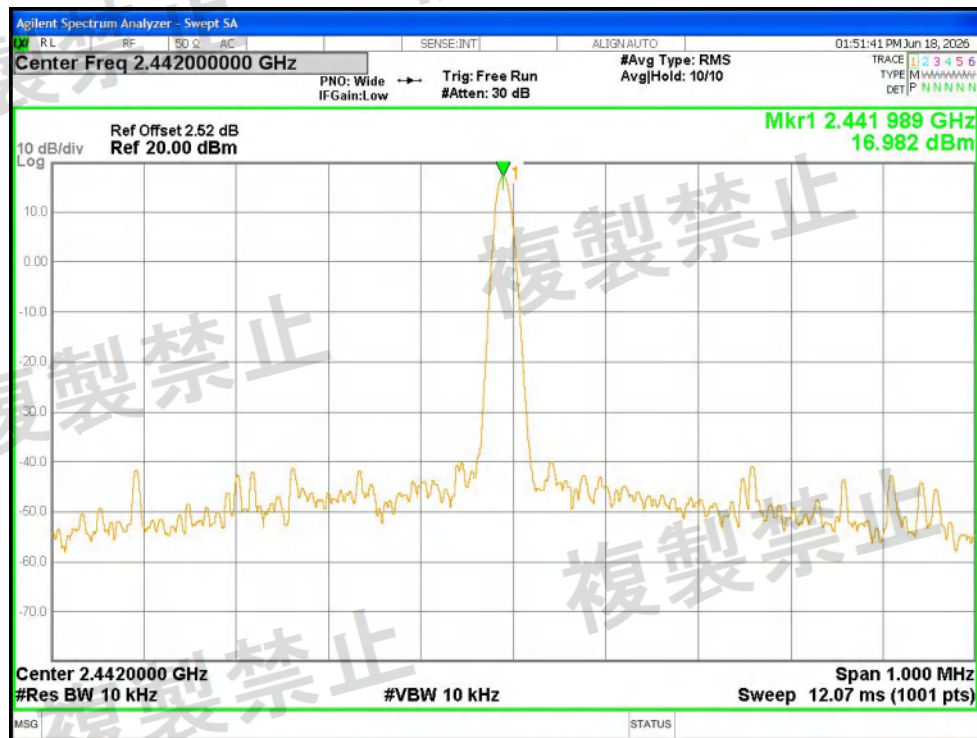


Freq. Error NVNT n40 2442MHz Ant1

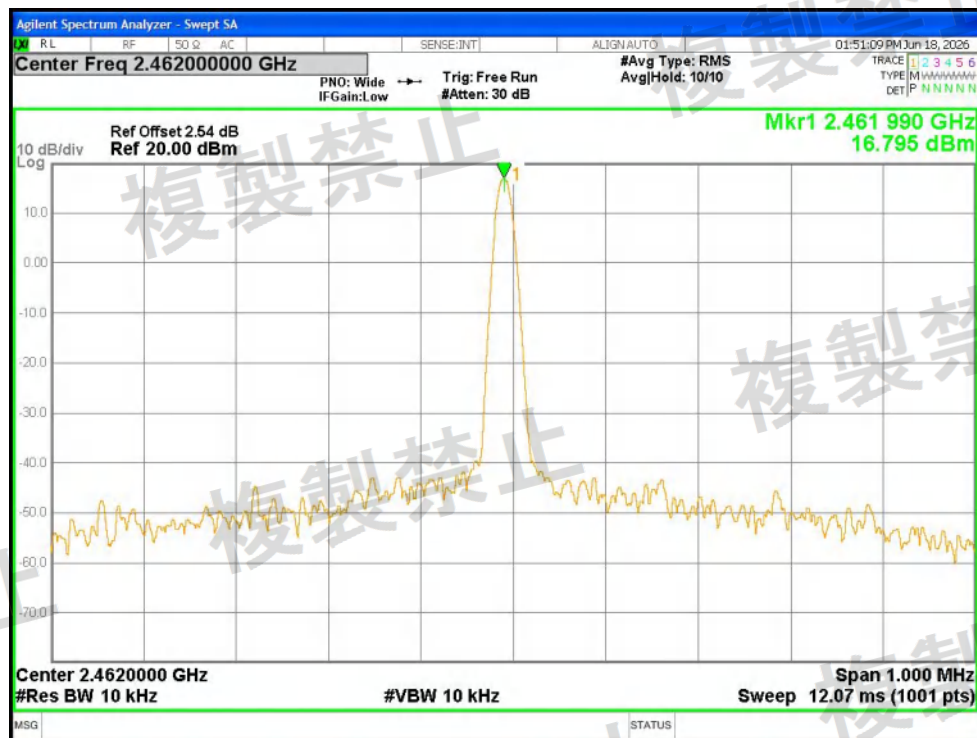


Freq. Error NVNT n40 2462MHz Ant1

2. Antenna Power


Condition	Mode	Frequency (MHz)	Antenna	Power (dBm/MHz)	Power (mW/MHz)	Limit (mW/MHz)	Declared Power (mW/MHz)	Tolerance (%)	Lower Limit (%)	Upper Limit (%)	Verdict
NVNT	b	2412	Ant1	-0.42	0.908	10	1	-9.22	-	20	Pass
NVNT	b	2442	Ant1	-0.67	0.857	10	1	-14.3	-	20	Pass
NVNT	b	2472	Ant1	-1.06	0.783	10	1	-21.66	-	20	Pass
NVNT	g	2412	Ant1	-0.76	0.839	10	1	-16.05	-	20	Pass
NVNT	g	2442	Ant1	-0.94	0.805	10	1	-19.46	-	20	Pass
NVNT	g	2472	Ant1	-1.33	0.736	10	1	-26.38	-	20	Pass
NVNT	n20	2412	Ant1	-1.27	0.746	10	1	-25.36	-	20	Pass
NVNT	n20	2442	Ant1	-1.18	0.762	10	1	-23.79	-	20	Pass
NVNT	n20	2472	Ant1	-1.51	0.706	10	1	-29.37	-	20	Pass
NVNT	n40	2422	Ant1	-1.22	0.755	5	1	-24.49	-	20	Pass
NVNT	n40	2442	Ant1	-1.31	0.74	5	1	-26.04	-	20	Pass
NVNT	n40	2462	Ant1	-1.16	0.766	5	1	-23.44	-	20	Pass

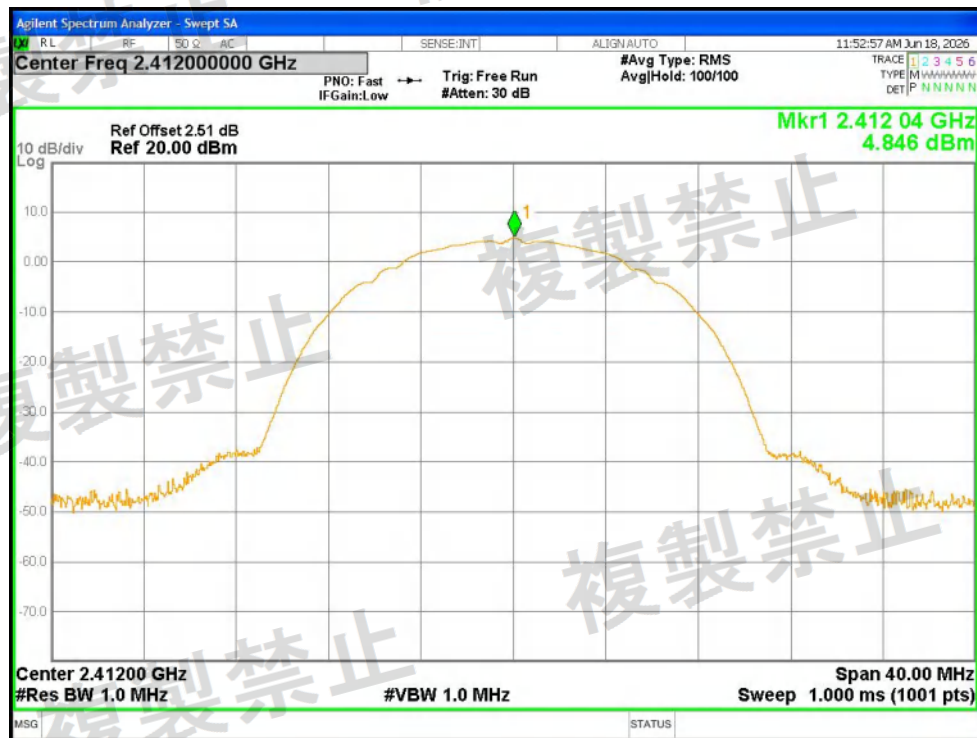


Power NVNT b 2412MHz Ant1 Pre Scan

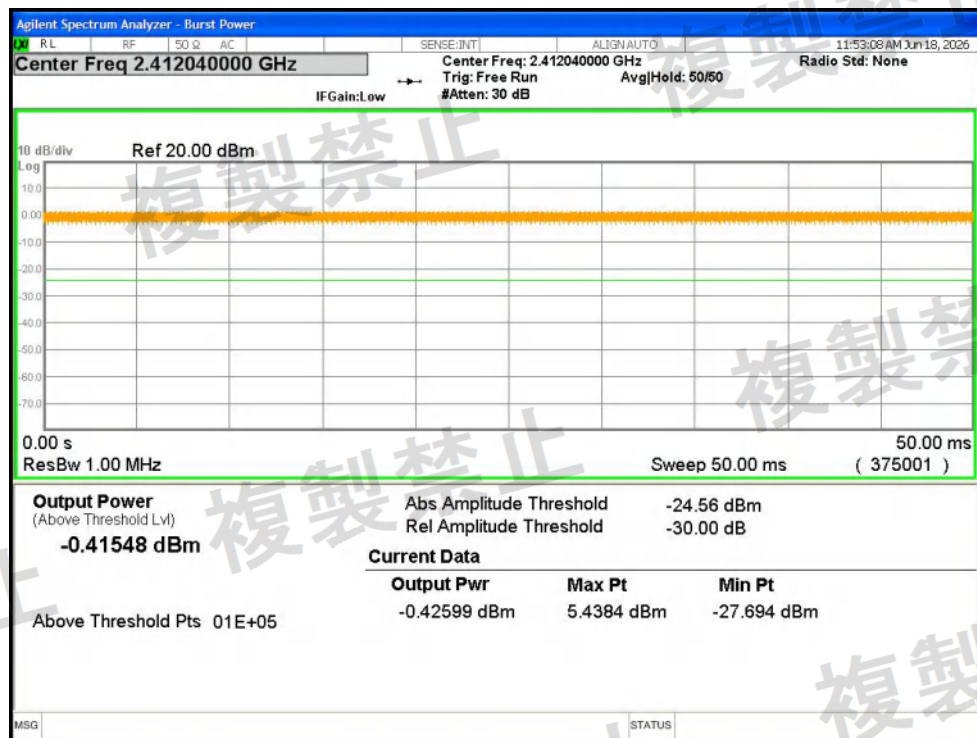


Power NVNT b 2412MHz Ant1 Zero Span

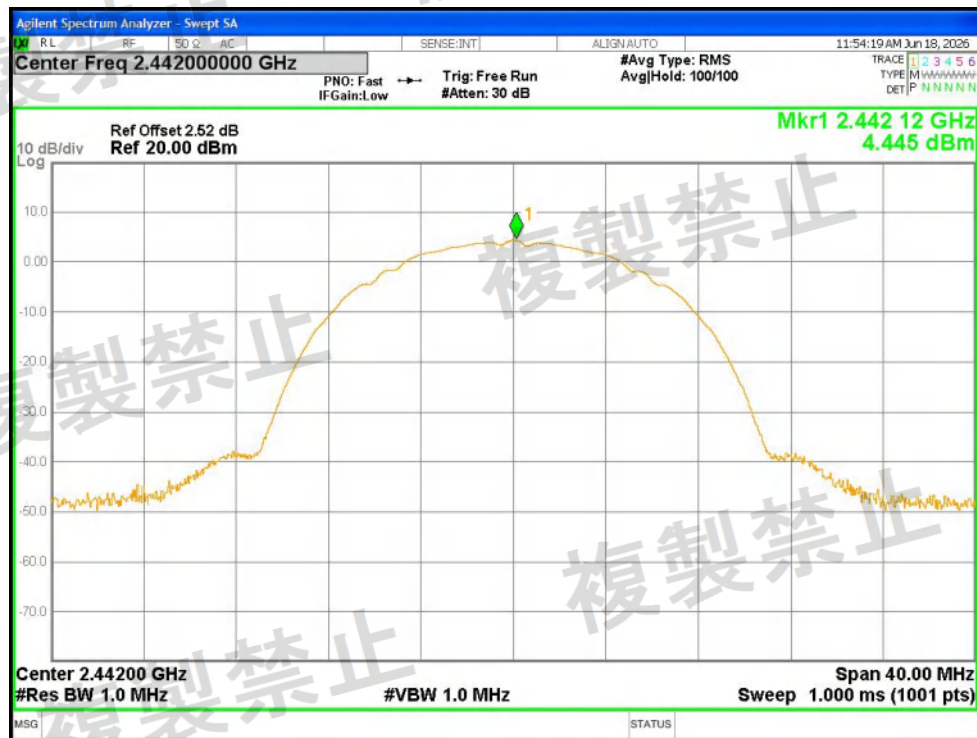


Power NVNT b 2442MHz Ant1 Pre Scan

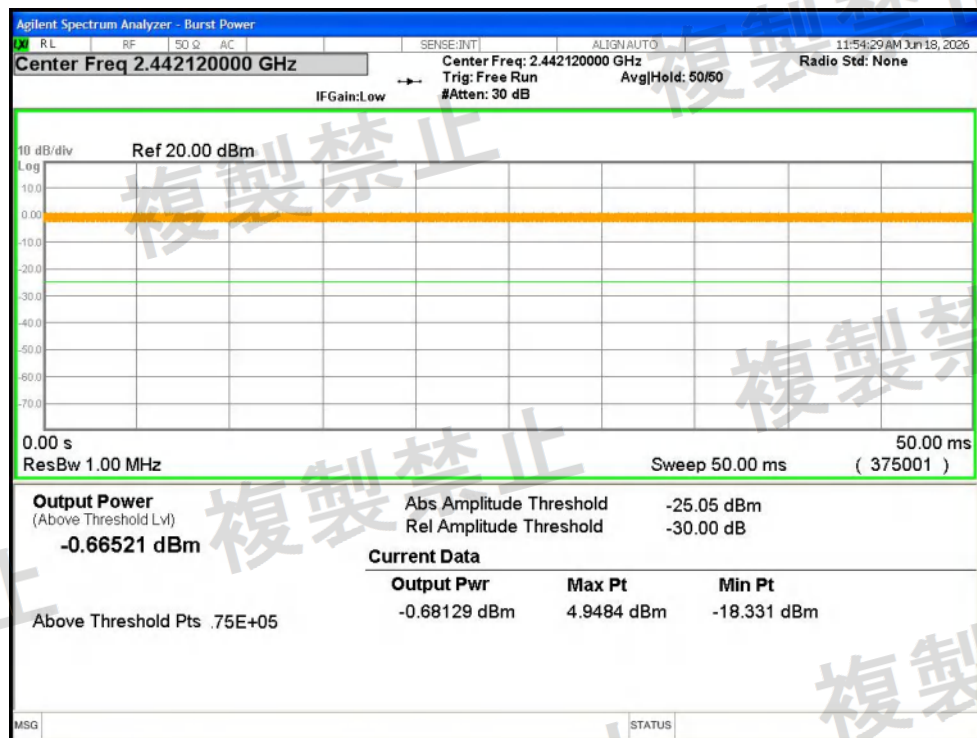


Power NVNT b 2442MHz Ant1 Zero Span

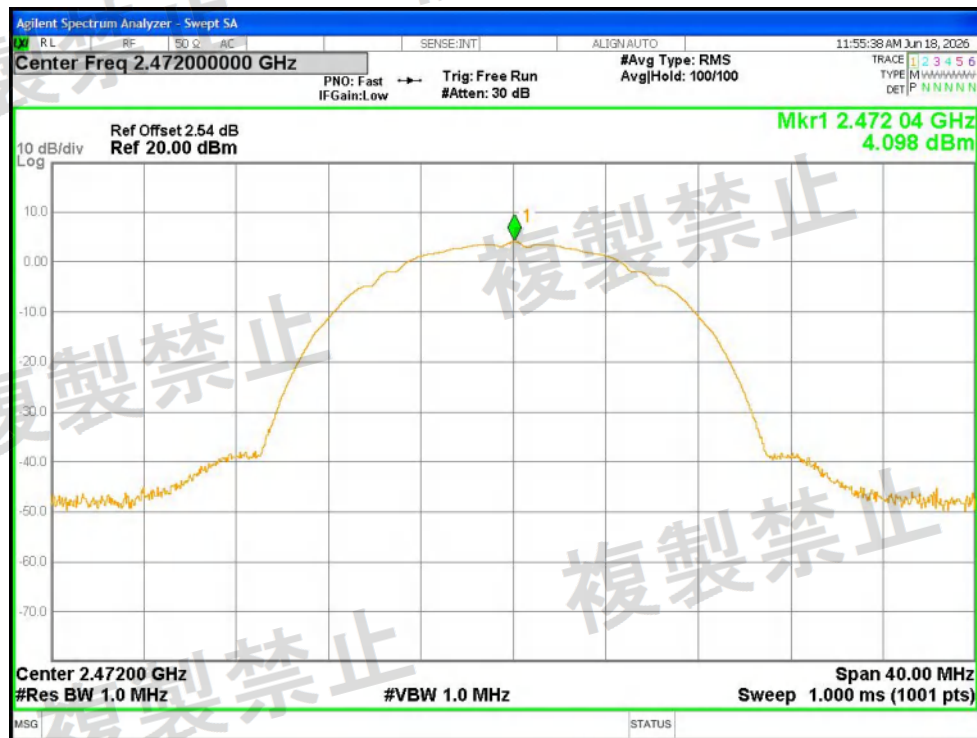


Power NVNT b 2472MHz Ant1 Pre Scan

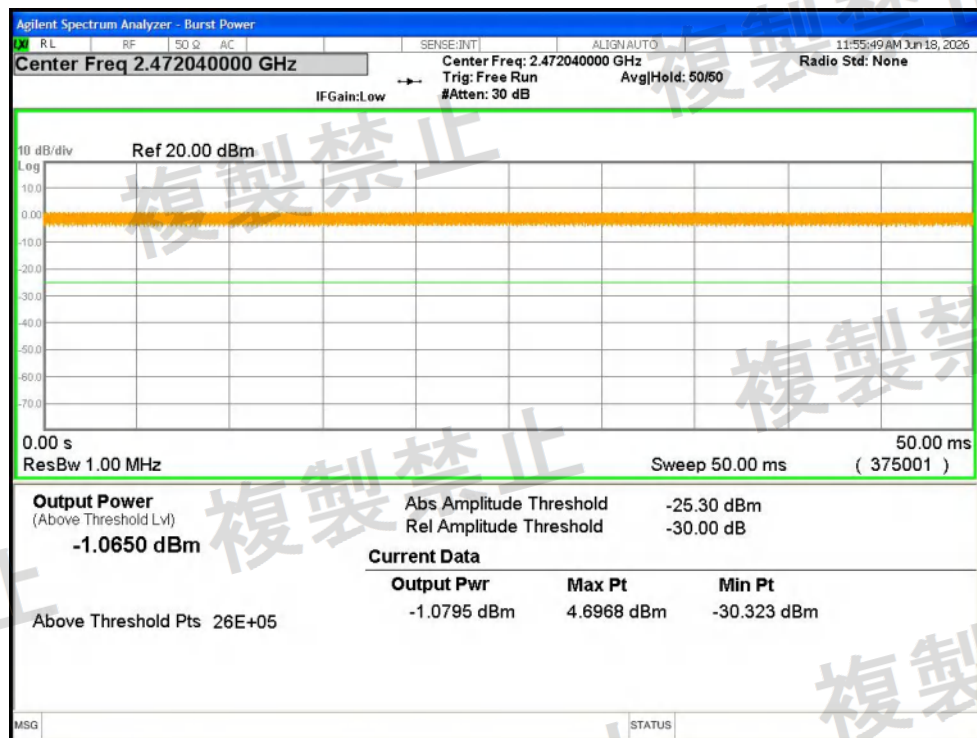


Power NVNT b 2472MHz Ant1 Zero Span

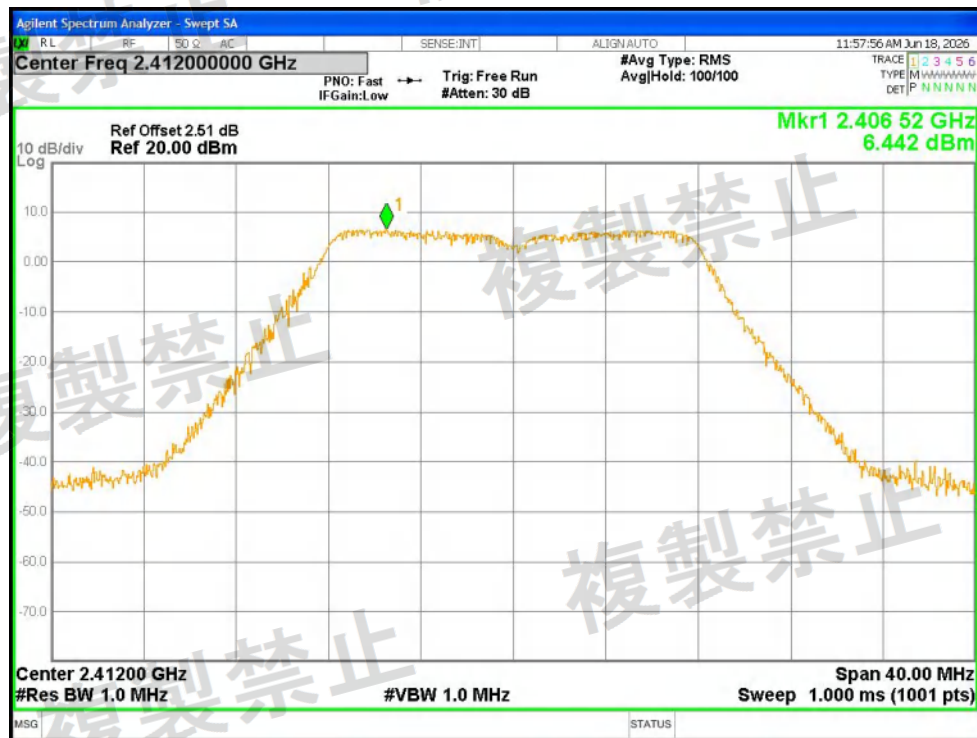


Power NVNT g 2412MHz Ant1 Pre Scan

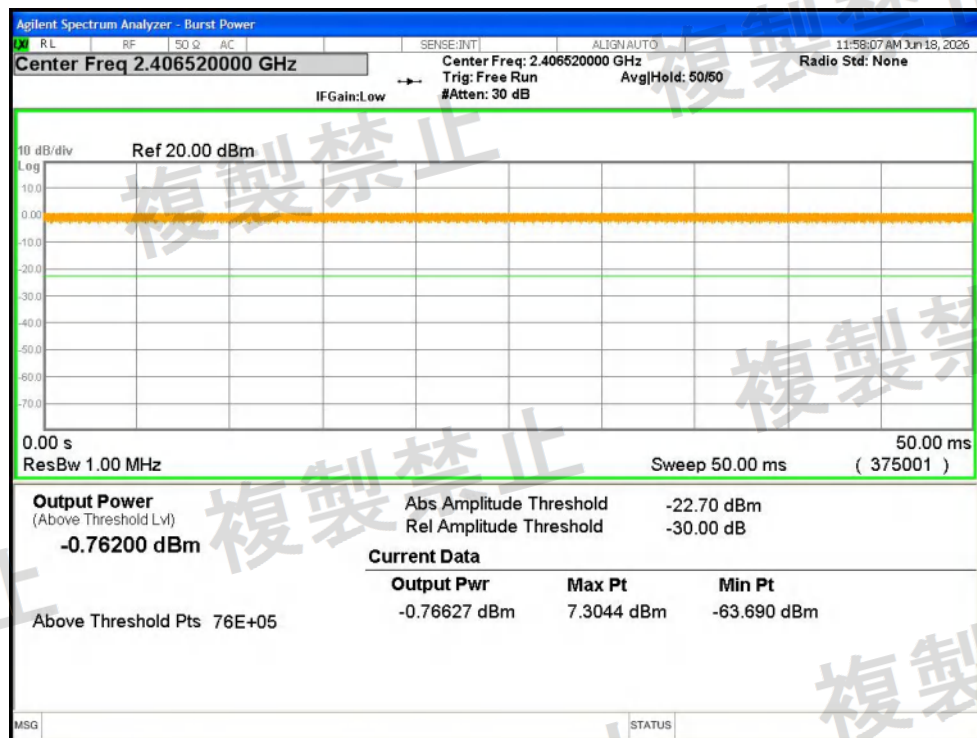


Power NVNT g 2412MHz Ant1 Zero Span

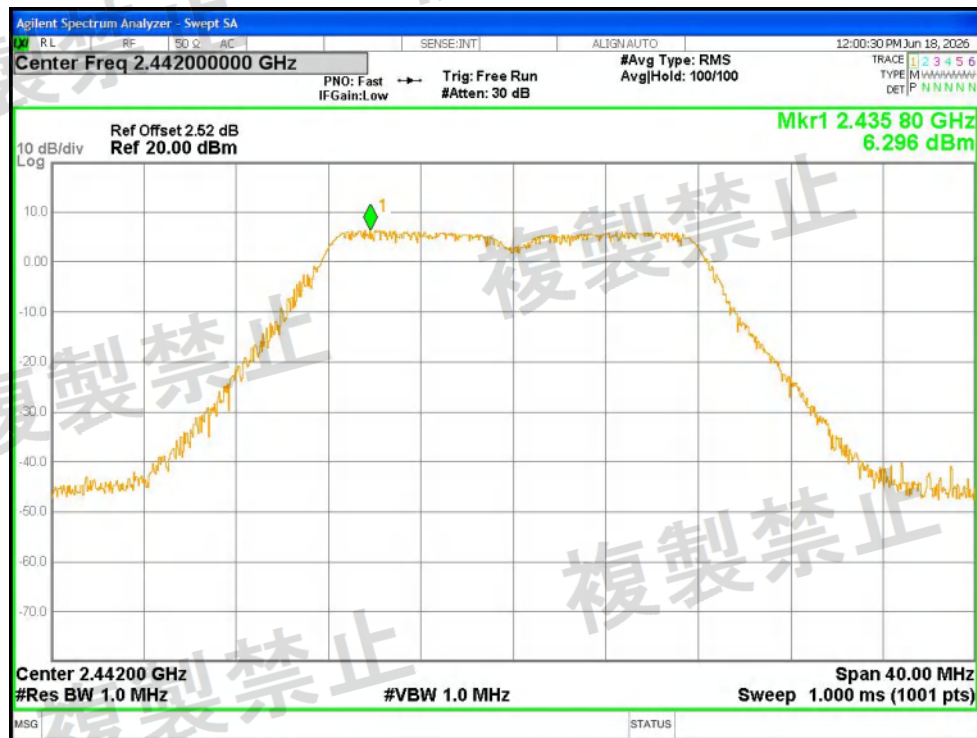


Power NVNT g 2442MHz Ant1 Pre Scan

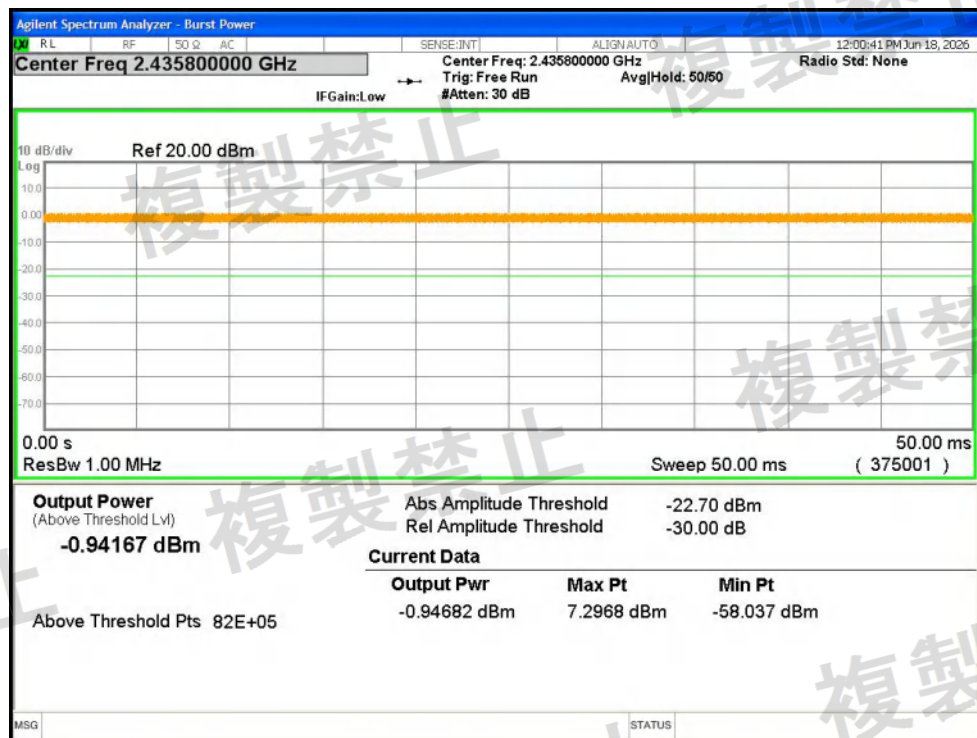


Power NVNT g 2442MHz Ant1 Zero Span

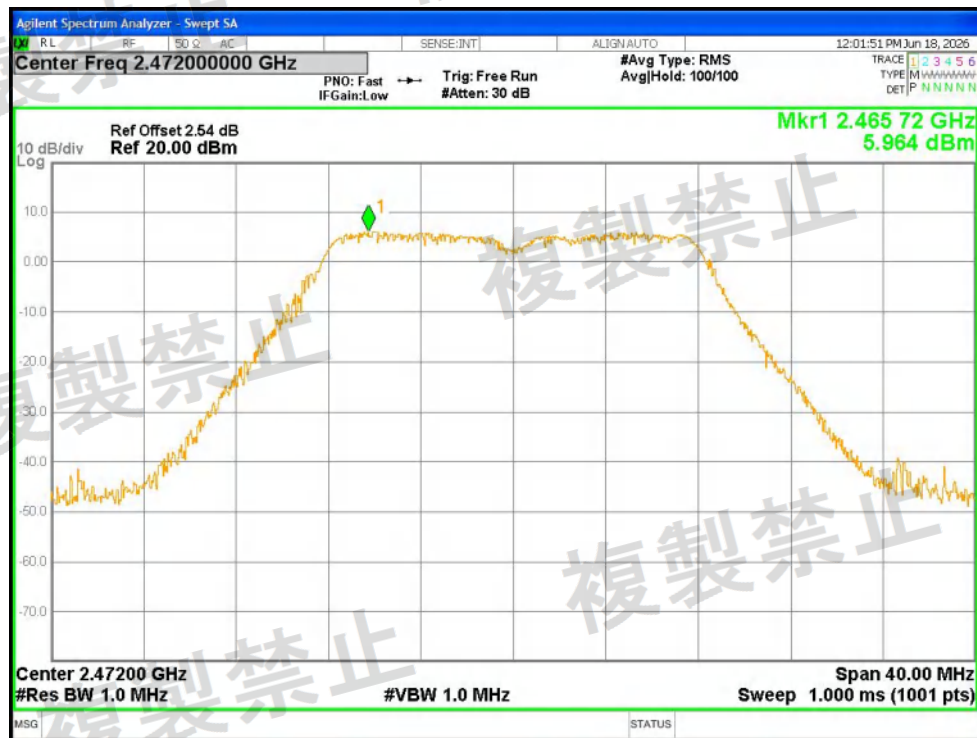


Power NVNT g 2472MHz Ant1 Pre Scan

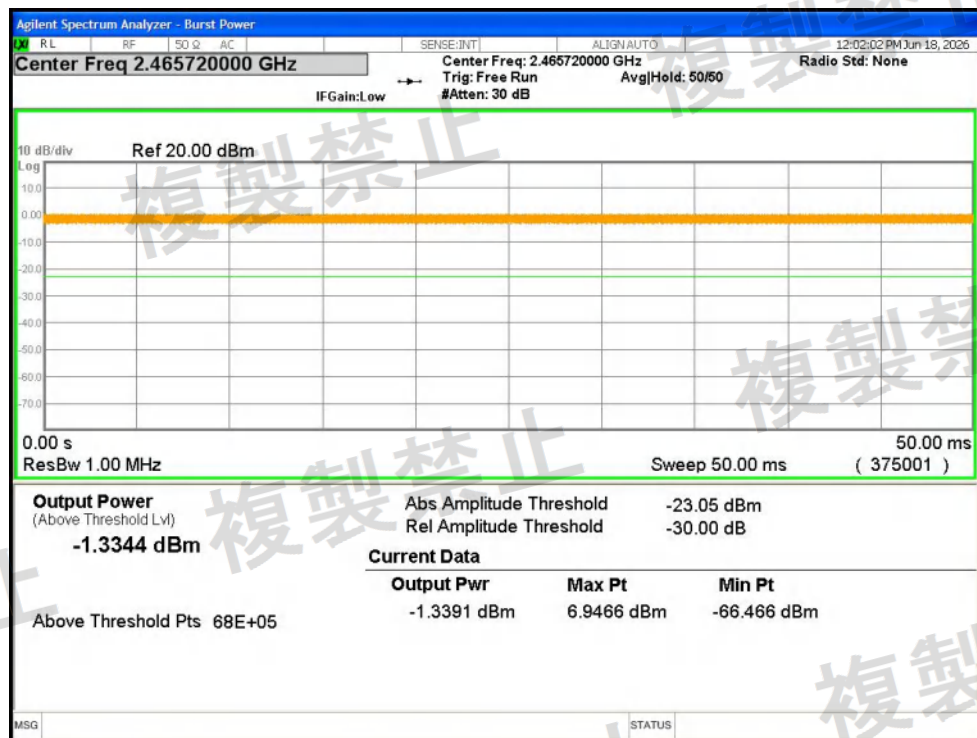


Power NVNT g 2472MHz Ant1 Zero Span

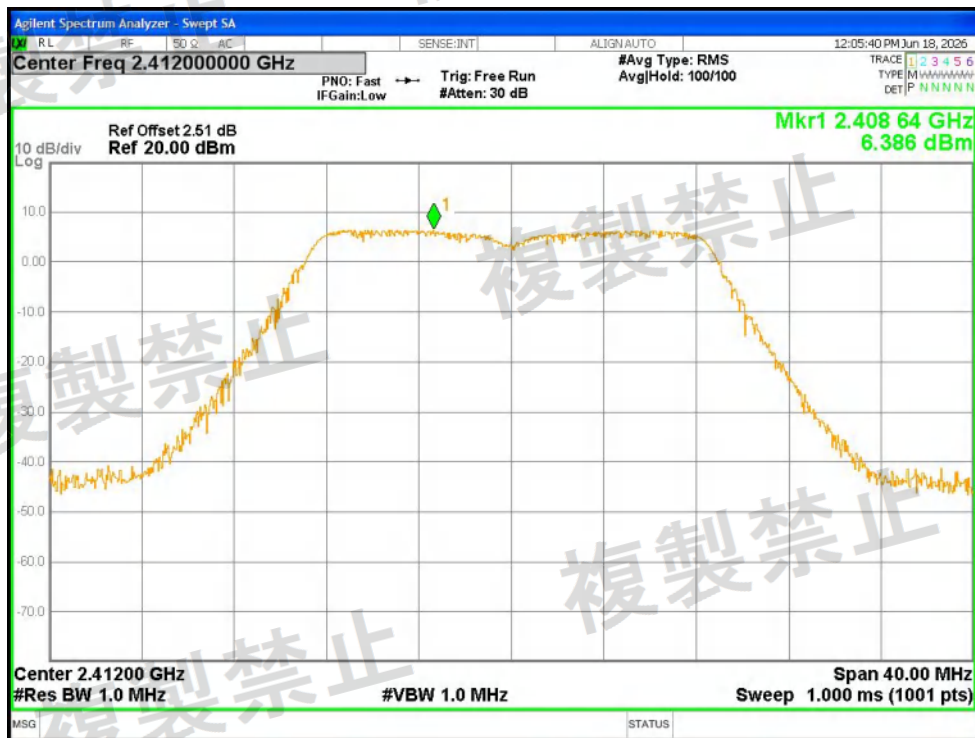


Power NVNT n20 2412MHz Ant1 Pre Scan

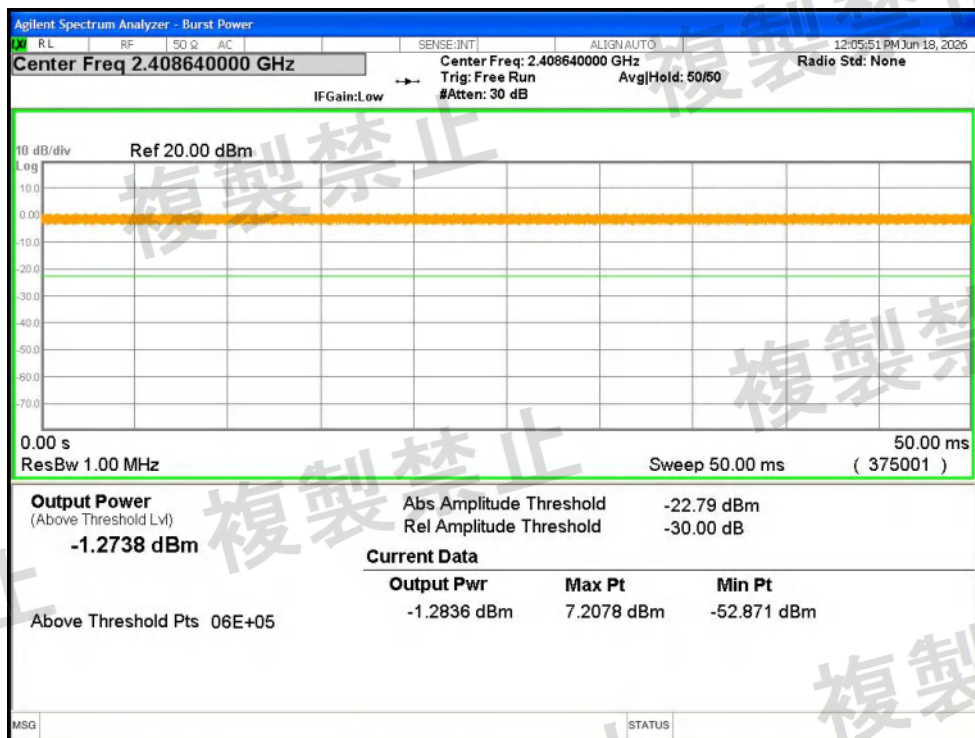


Power NVNT n20 2412MHz Ant1 Zero Span

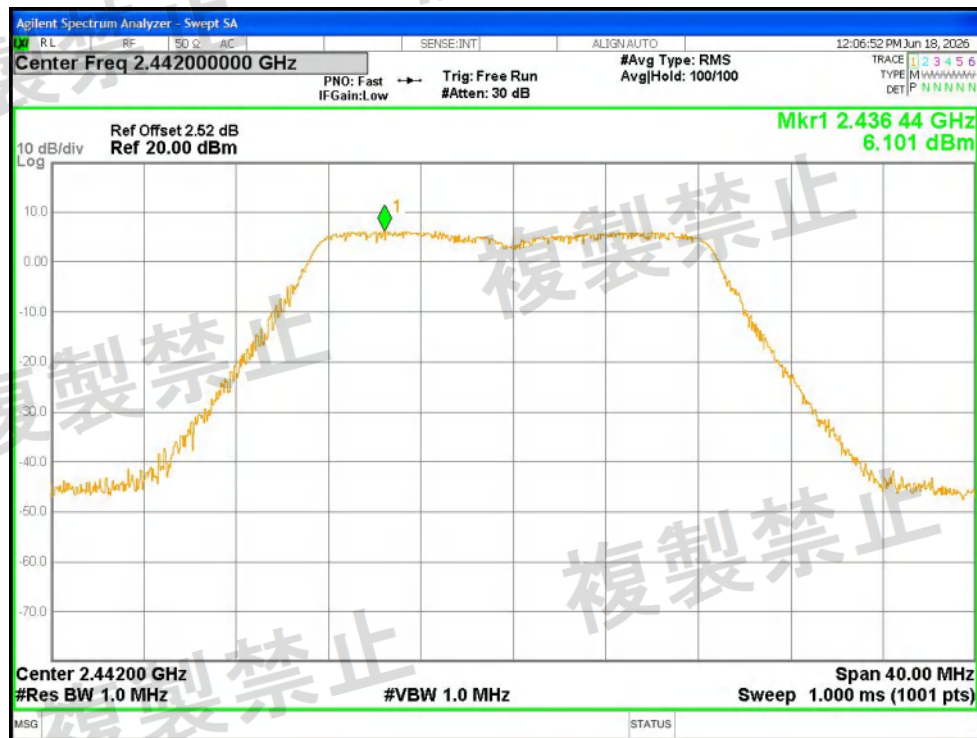


Power NVNT n20 2442MHz Ant1 Pre Scan

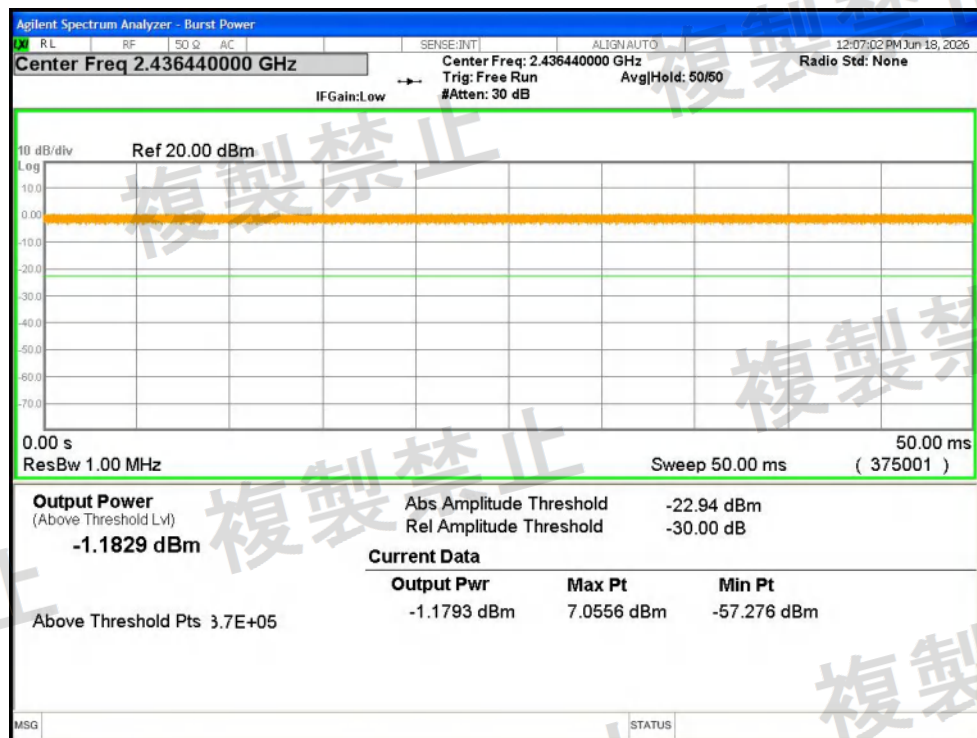


Power NVNT n20 2442MHz Ant1 Zero Span

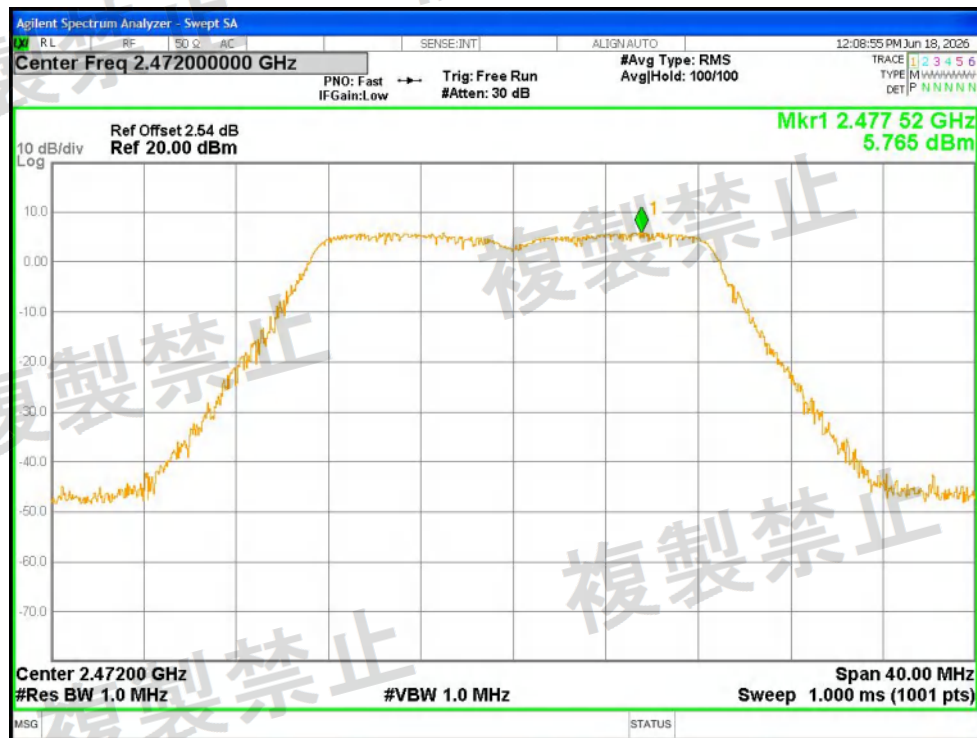


Power NVNT n20 2472MHz Ant1 Pre Scan

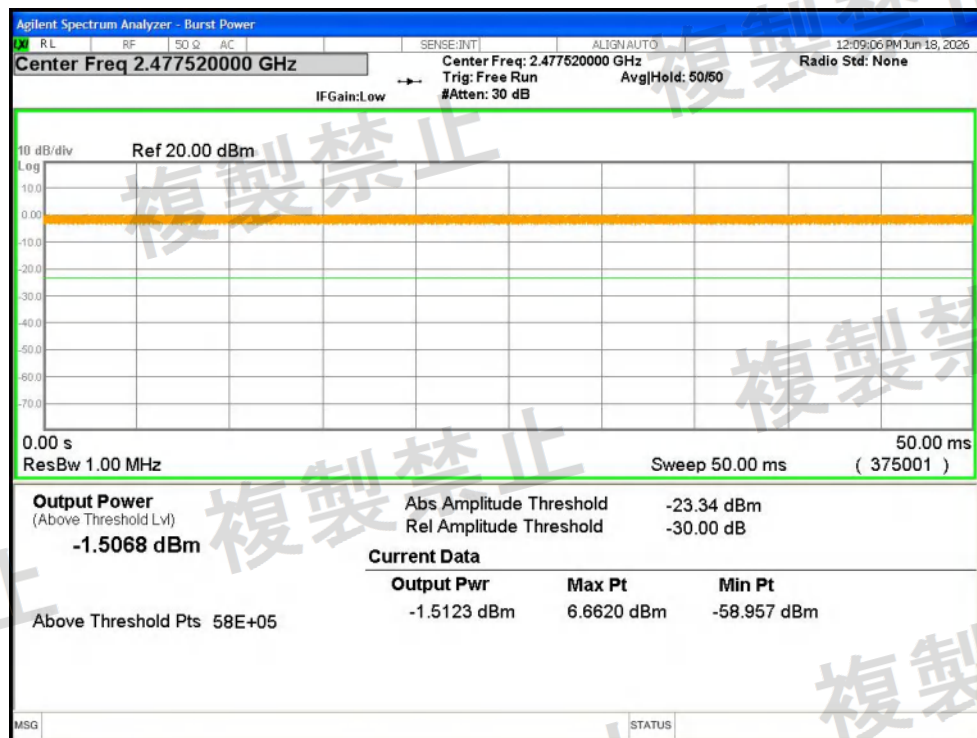


Power NVNT n20 2472MHz Ant1 Zero Span

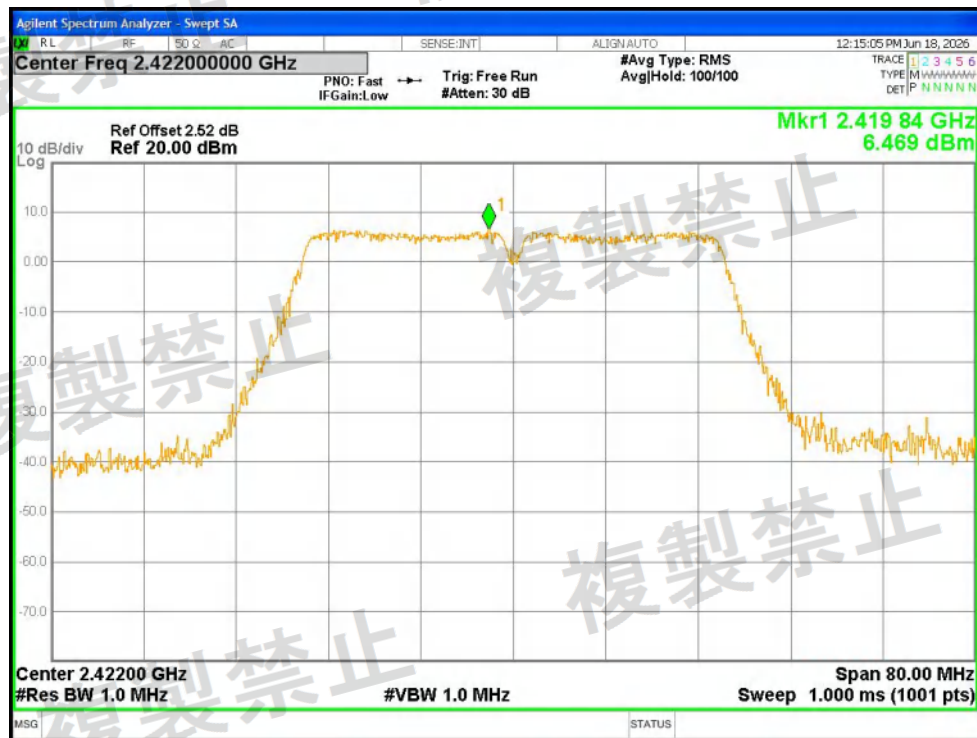


Power NVNT n40 2422MHz Ant1 Pre Scan

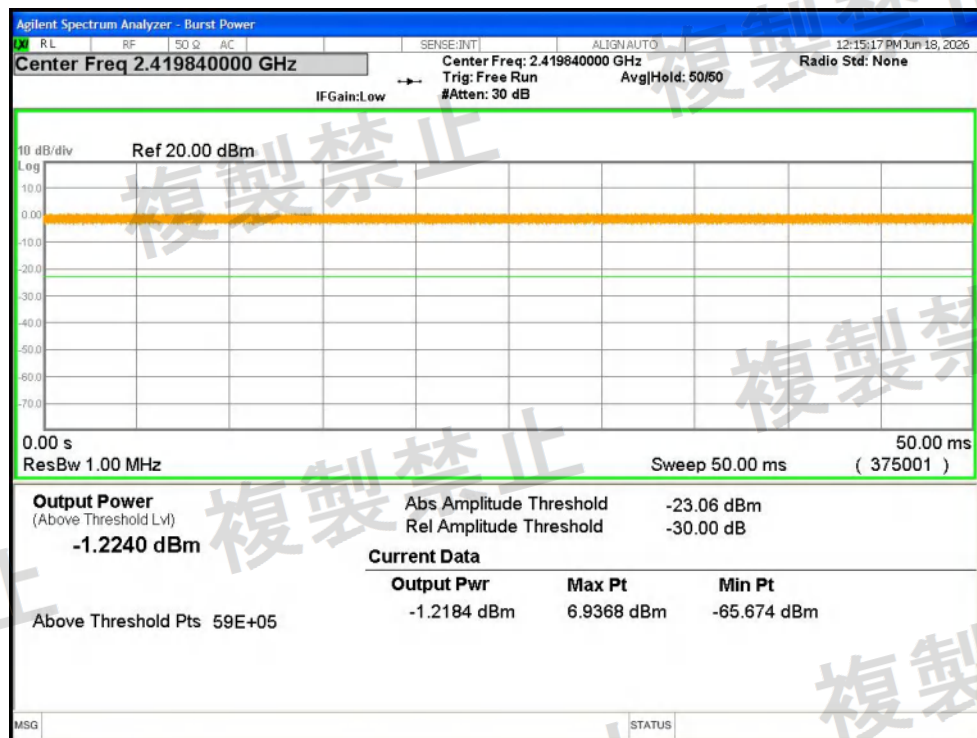


Power NVNT n40 2422MHz Ant1 Zero Span

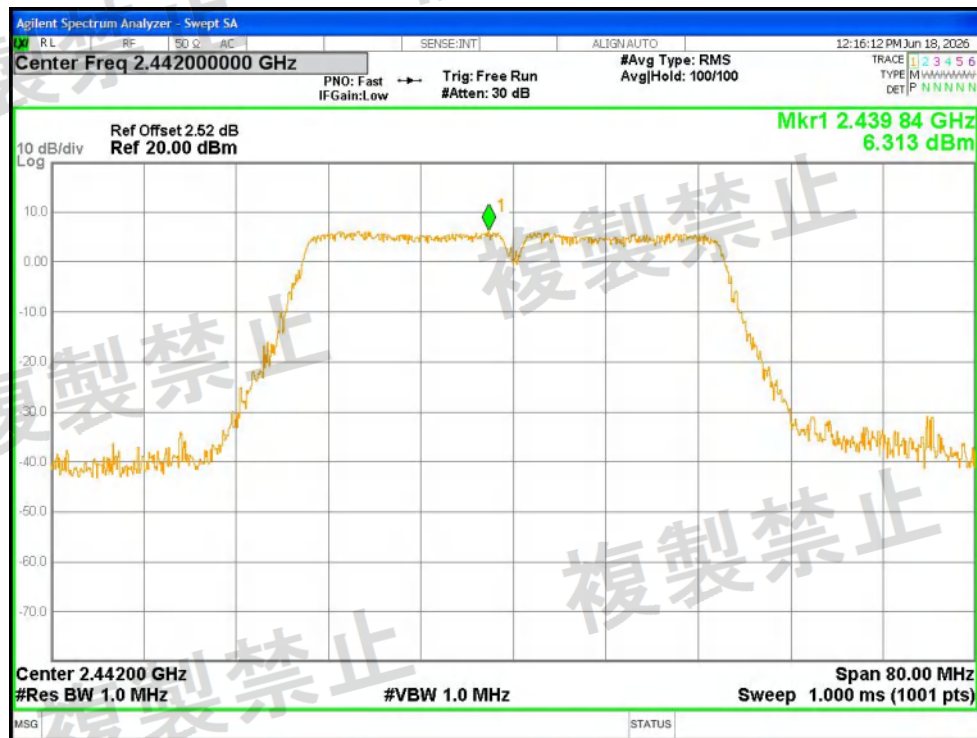


Power NVNT n40 2442MHz Ant1 Pre Scan

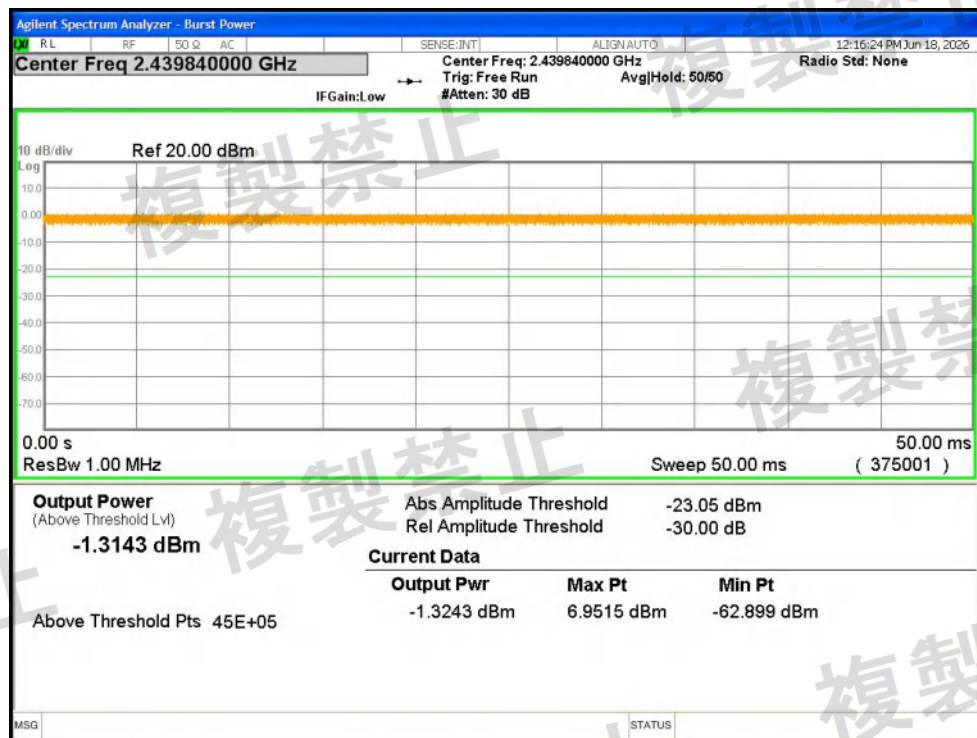

Power NVNT n40 2442MHz Ant1 Zero Span

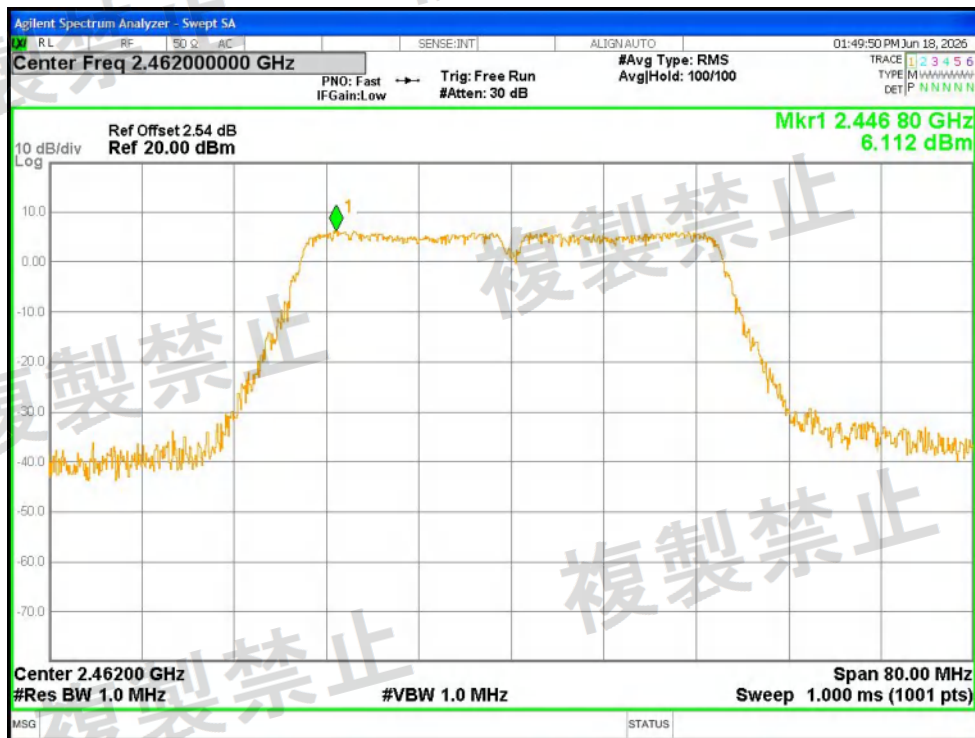

Power NVNT n40 2462MHz Ant1 Pre Scan

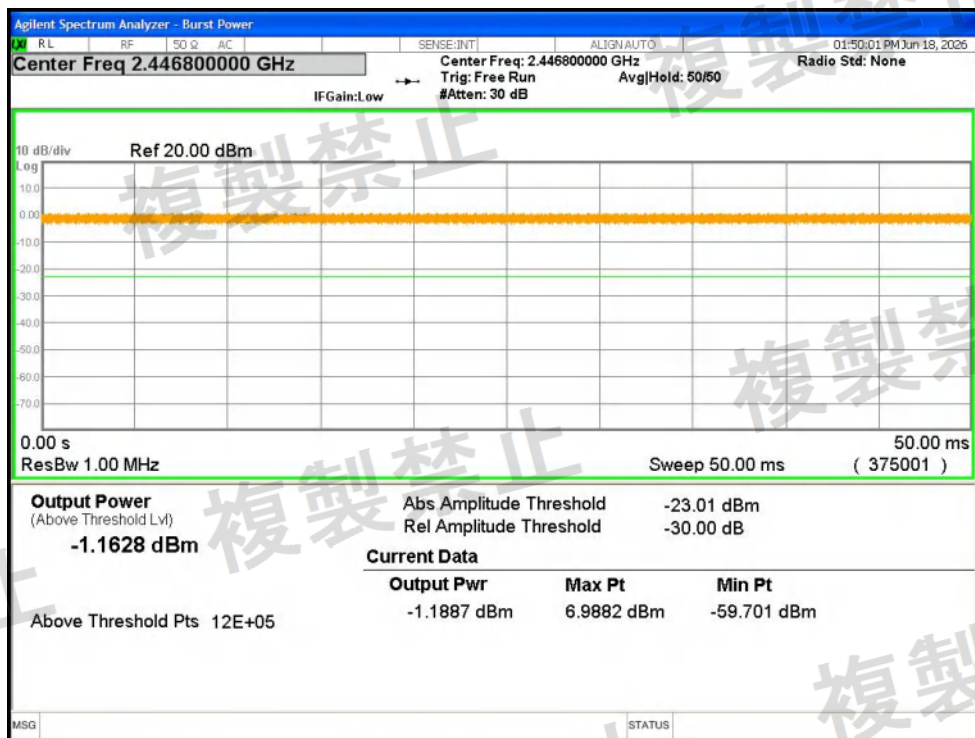


Power NVNT n40 2462MHz Ant1 Zero Span

3. EIRP Power


Condition	Mode	Frequency (MHz)	Antenna	Power (dBm/MHz)	Power (mW/MHz)	Gain (dBi)	EIRP (dBm/MHz)	EIRP (mW/MHz)	Limit (dBm/MHz)	Verdict
NVNT	b	2412	Ant1	-0.42	0.908	2.73	2.31	3.638	12.14	Pass
NVNT	b	2442	Ant1	-0.67	0.857	2.73	2.06	3.587	12.14	Pass
NVNT	b	2472	Ant1	-1.06	0.783	2.73	1.67	3.513	12.14	Pass
NVNT	g	2412	Ant1	-0.76	0.839	2.73	1.97	3.569	12.14	Pass
NVNT	g	2442	Ant1	-0.94	0.805	2.73	1.79	3.535	12.14	Pass
NVNT	g	2472	Ant1	-1.33	0.736	2.73	1.4	3.466	12.14	Pass
NVNT	n20	2412	Ant1	-1.27	0.746	2.73	1.46	3.476	12.14	Pass
NVNT	n20	2442	Ant1	-1.18	0.762	2.73	1.55	3.492	12.14	Pass
NVNT	n20	2472	Ant1	-1.51	0.706	2.73	1.22	3.436	12.14	Pass
NVNT	n40	2422	Ant1	-1.22	0.755	2.73	1.51	3.485	9.13	Pass
NVNT	n40	2442	Ant1	-1.31	0.74	2.73	1.42	3.47	9.13	Pass
NVNT	n40	2462	Ant1	-1.16	0.766	2.73	1.57	3.496	9.13	Pass

4. Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	Limit (MHz)	Verdict
NVNT	b	2412	Ant1	15.048	26	Pass
NVNT	b	2442	Ant1	15.038	26	Pass
NVNT	b	2472	Ant1	15.052	26	Pass
NVNT	g	2412	Ant1	16.737	26	Pass
NVNT	g	2442	Ant1	16.734	26	Pass
NVNT	g	2472	Ant1	16.73	26	Pass
NVNT	n20	2412	Ant1	17.817	26	Pass
NVNT	n20	2442	Ant1	17.819	26	Pass
NVNT	n20	2472	Ant1	17.848	26	Pass
NVNT	n40	2422	Ant1	36.182	40	Pass
NVNT	n40	2442	Ant1	36.19	40	Pass
NVNT	n40	2462	Ant1	36.157	40	Pass

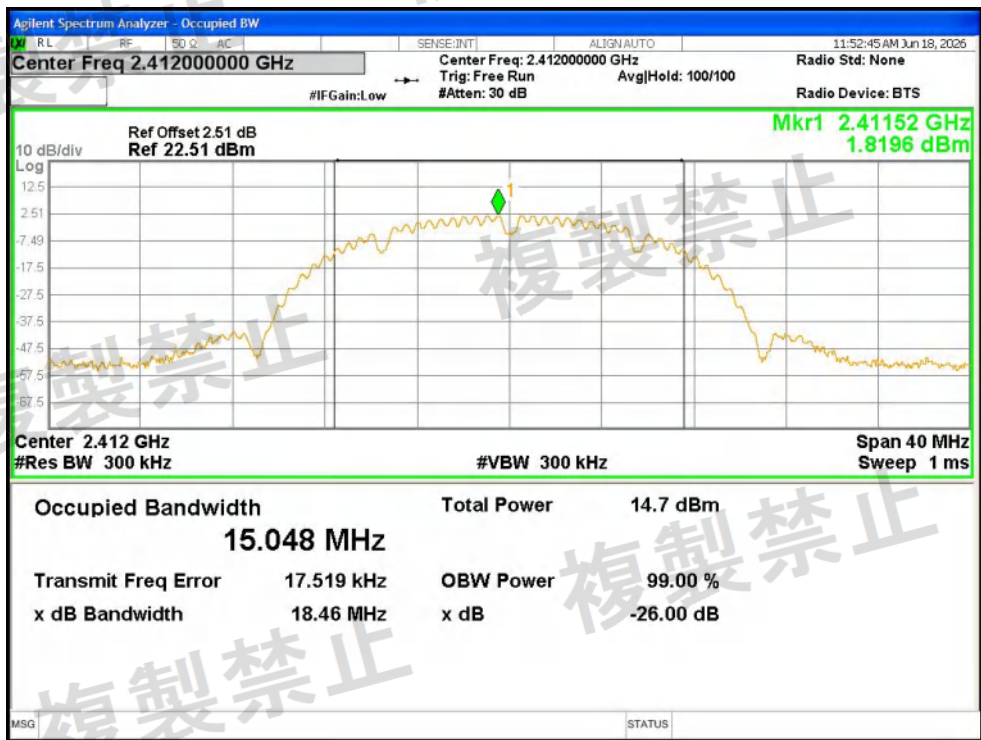


OBW NVNT b 2412MHz Ant1

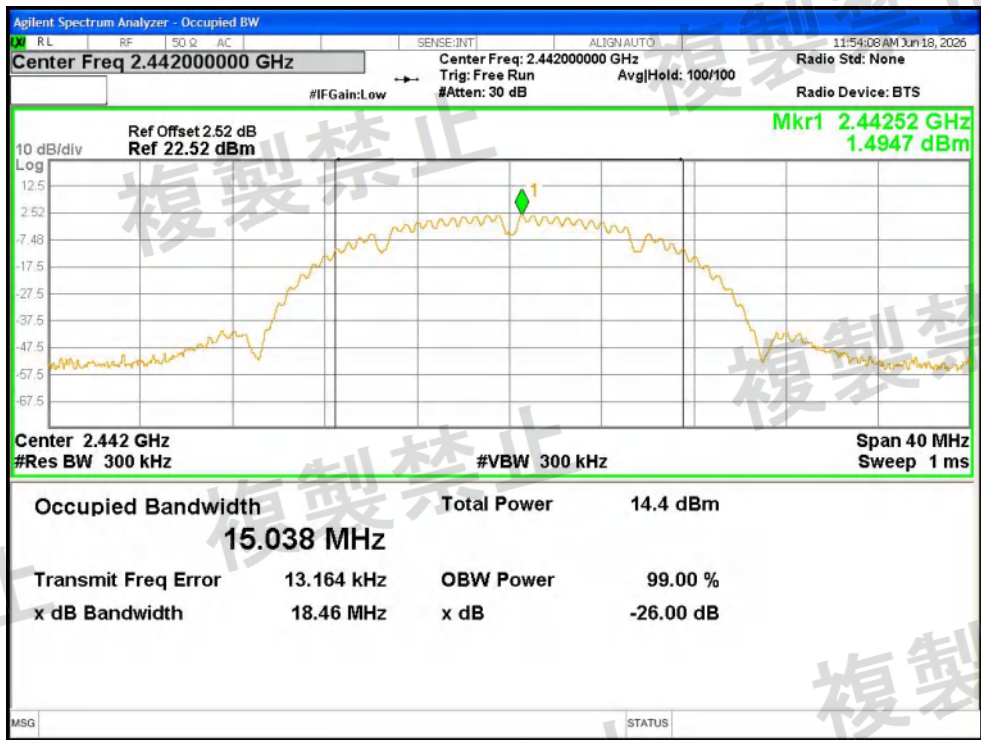


OBW NVNT b 2442MHz Ant1

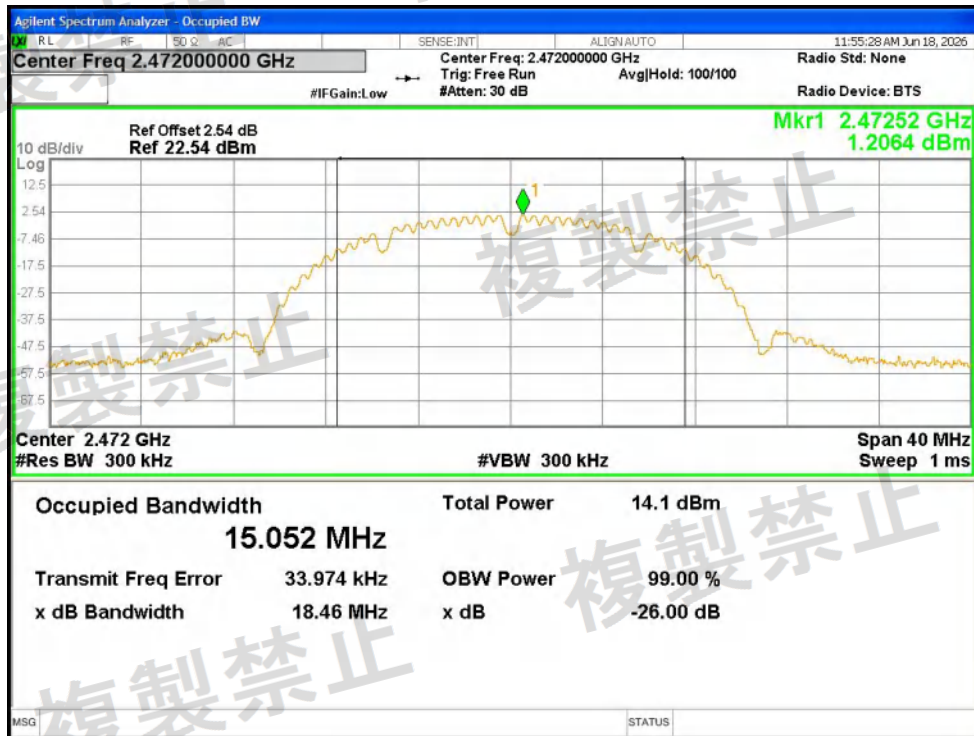


OBW NVNT b 2472MHz Ant1

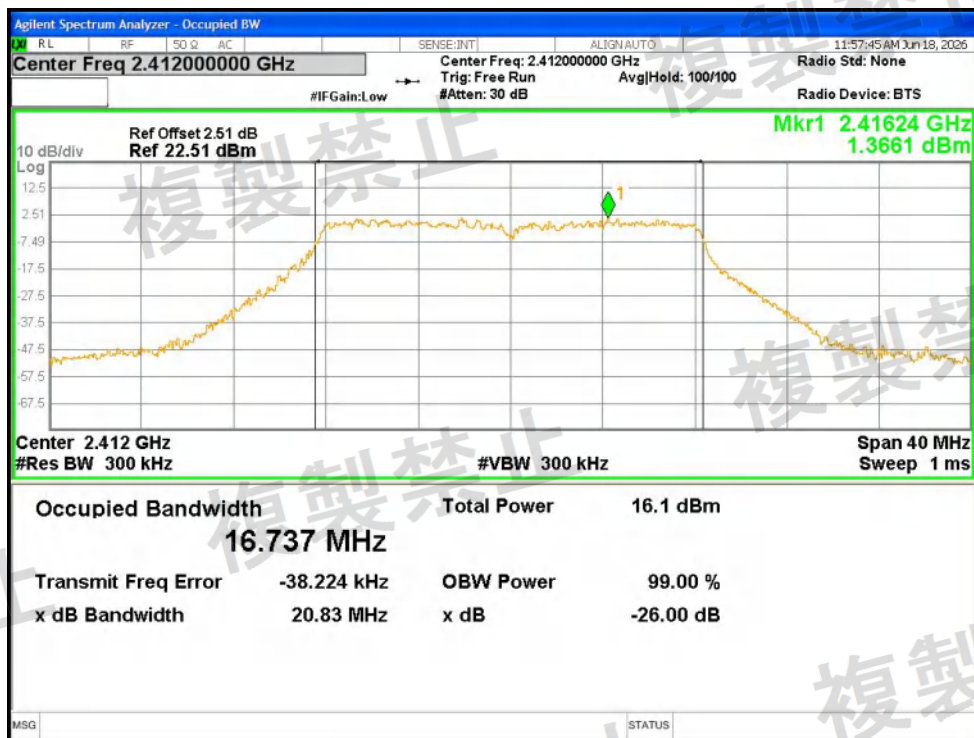


OBW NVNT g 2412MHz Ant1

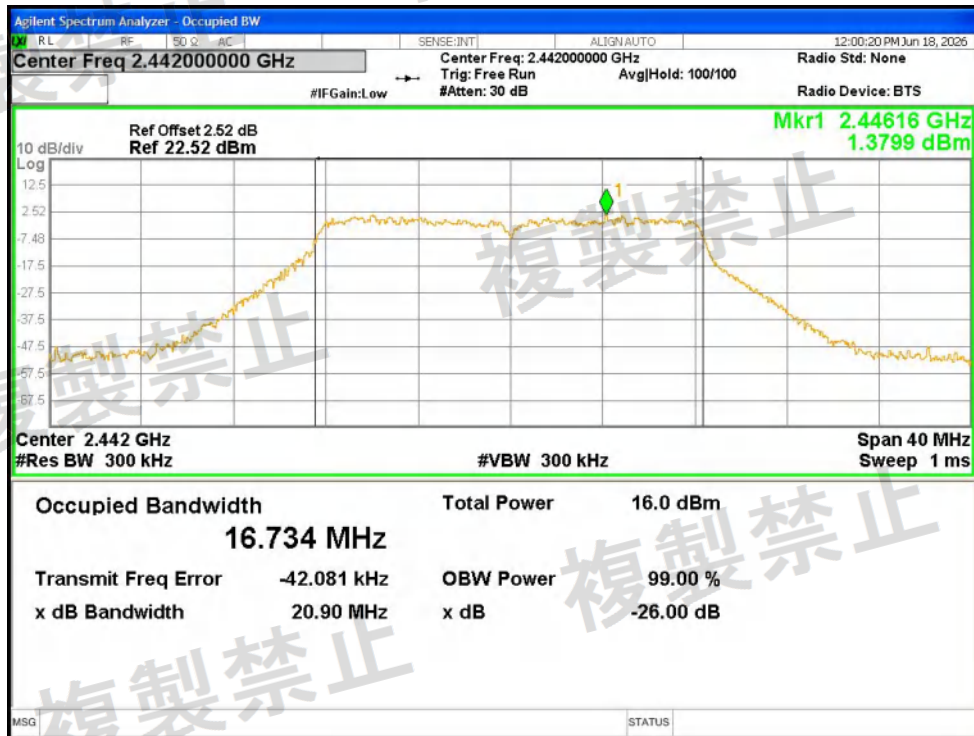


OBW NVNT g 2442MHz Ant1

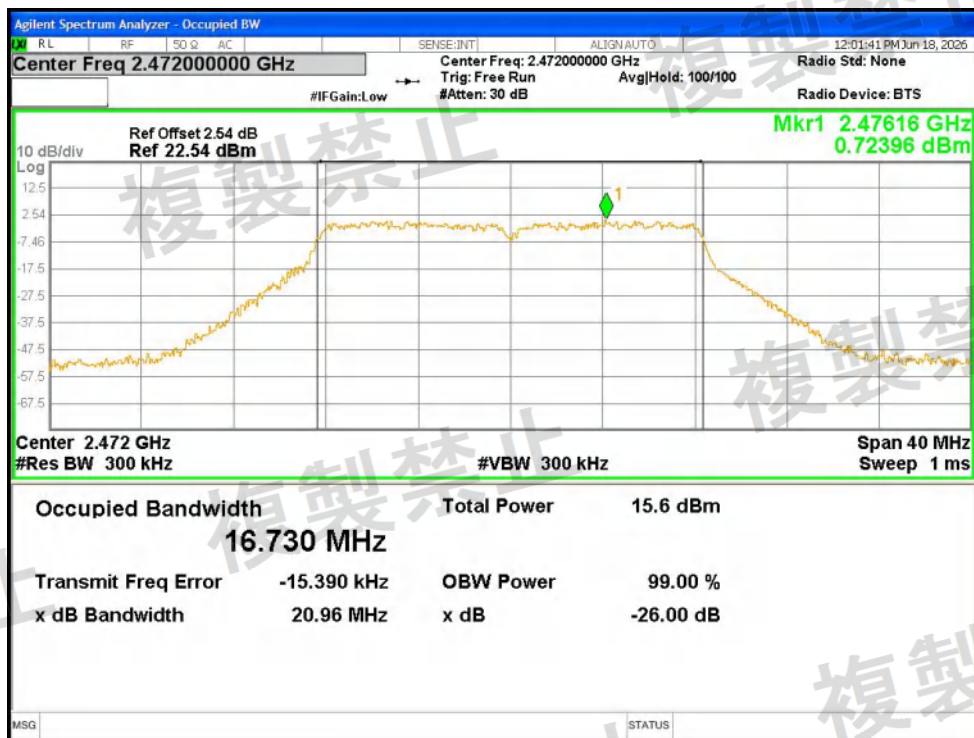


OBW NVNT g 2472MHz Ant1

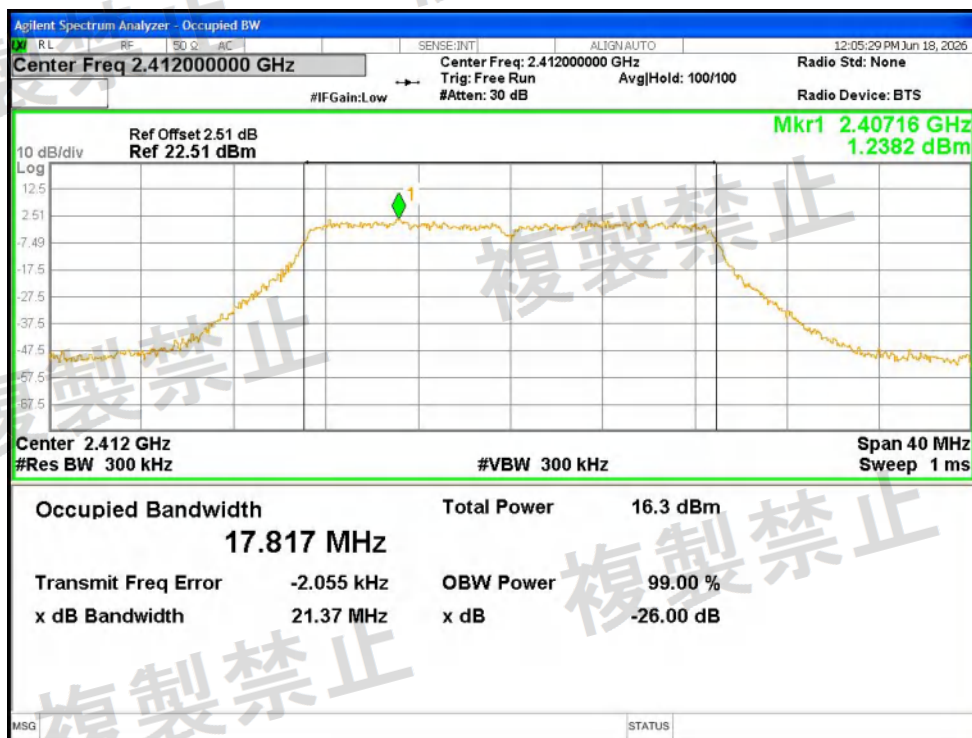


OBW NVNT n20 2412MHz Ant1

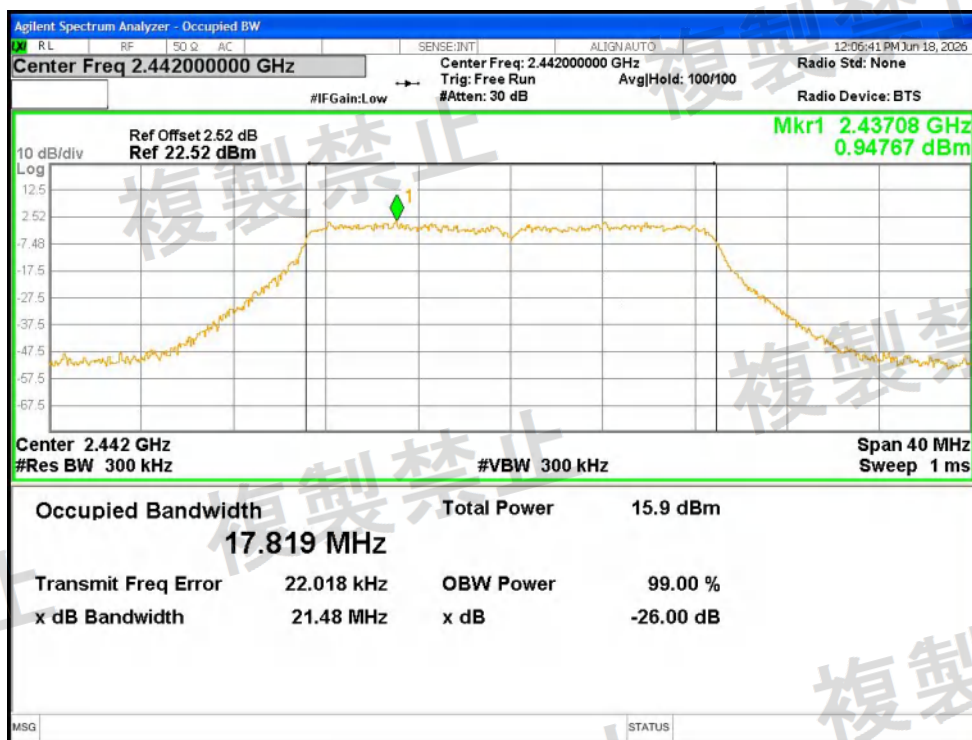


OBW NVNT n20 2442MHz Ant1

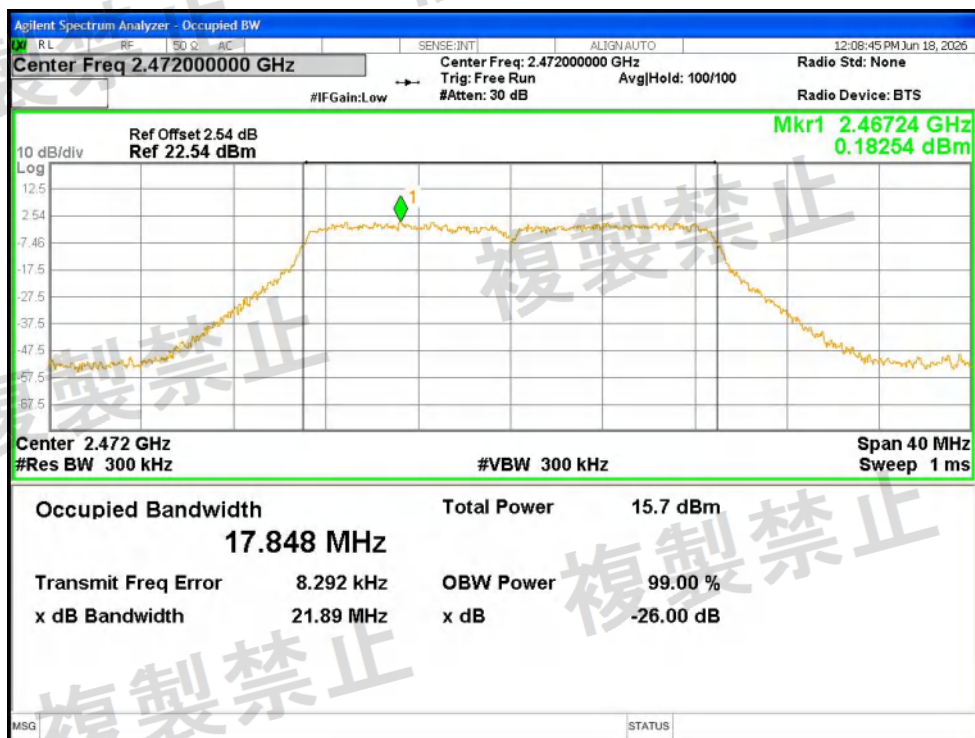


OBW NVNT n20 2472MHz Ant1

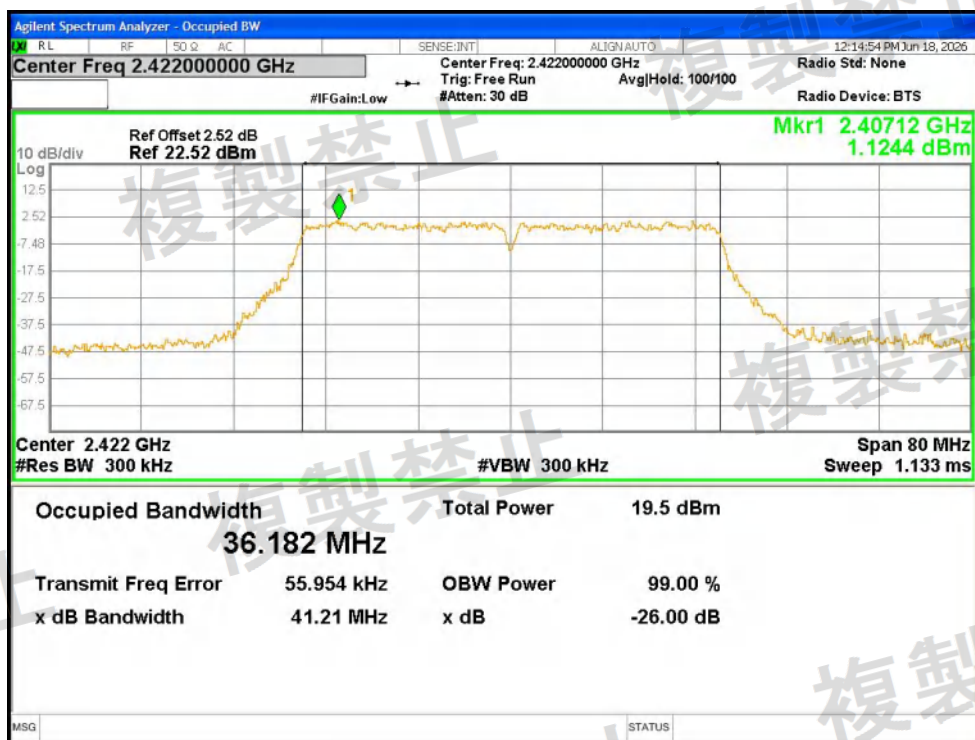

OBW NVNT n40 2422MHz Ant1

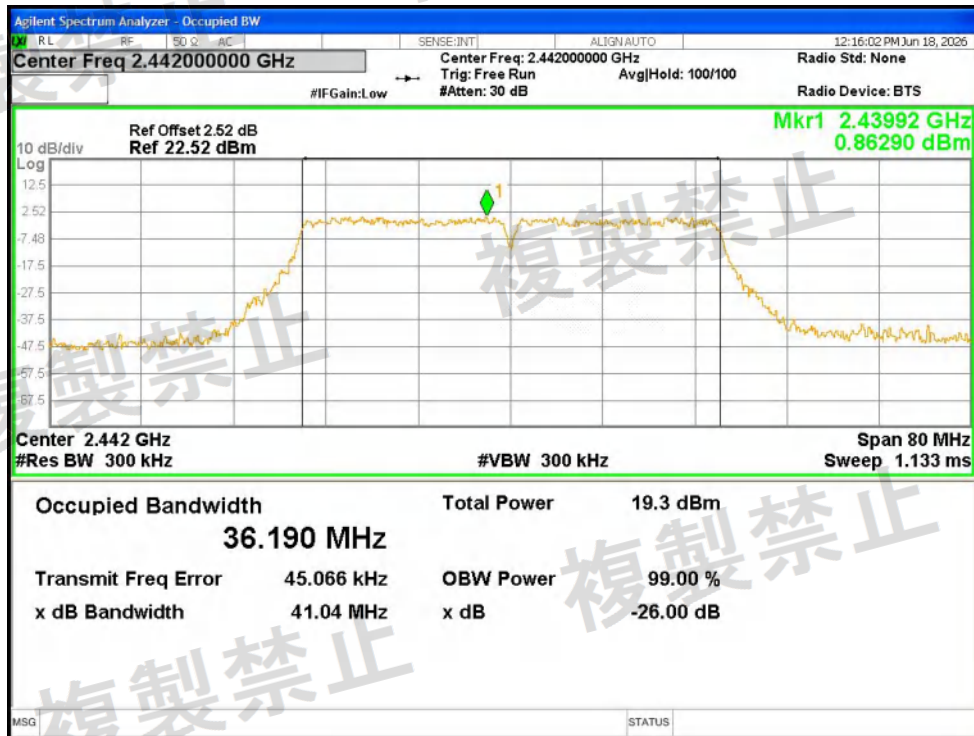

OBW NVNT n40 2442MHz Ant1

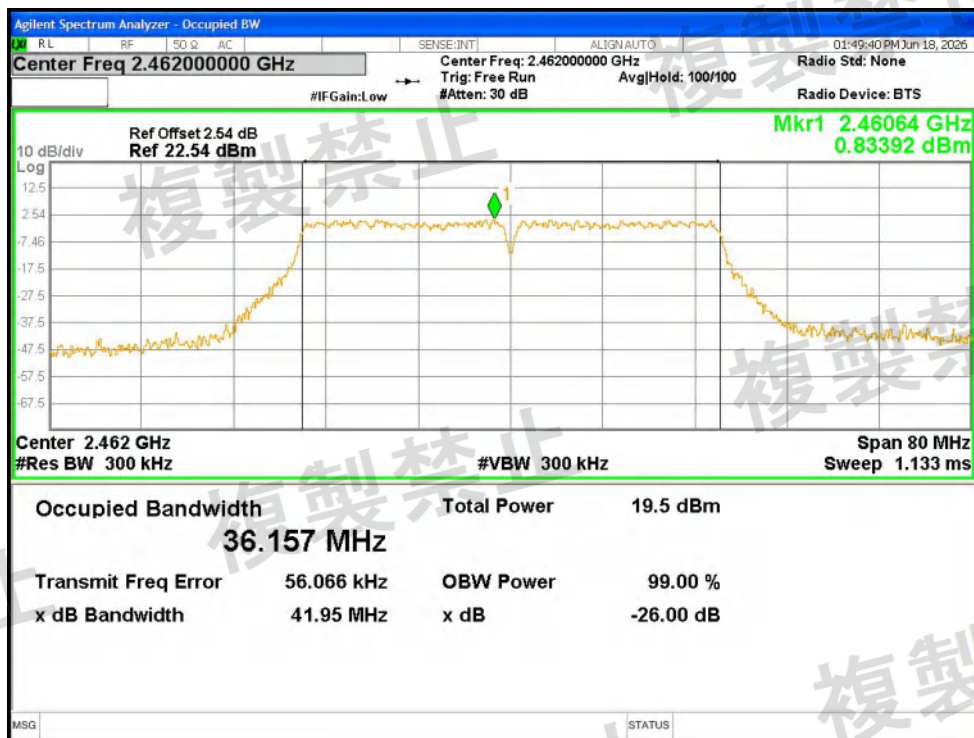


OBW NVNT n40 2462MHz Ant1


6. Tx Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Range (MHz)	Emission Frequency (MHz)	Max Peak Value (dBm)	Max RMS Value (dBm)	Max Peak Value (uW/MHz)	Max RMS Value (uW/MHz)	Limit Start(uW/MHz)	Limit Stop (uW/MHz)	Verdict
NVNT	b	2412	Ant1	30-1000	665.35	-58.34	NA	0.0015	NA	2.5	2.5	Pass
NVNT	b	2412	Ant1	1000-2387	2378.68	-51.15	NA	0.0077	NA	2.5	2.5	Pass
NVNT	b	2412	Ant1	2387-2400	2399.92	-38.80	NA	0.1318	NA	25	25	Pass
NVNT	b	2412	Ant1	2483.5-2496.5	2490.34	-51.80	NA	0.0066	NA	25	25	Pass
NVNT	b	2412	Ant1	2496.5-13000	2496.50	-52.51	NA	0.0056	NA	2.5	2.5	Pass
NVNT	b	2442	Ant1	30-1000	864.20	-58.10	NA	0.0015	NA	2.5	2.5	Pass
NVNT	b	2442	Ant1	1000-2387	2282.98	-53.37	NA	0.0046	NA	2.5	2.5	Pass
NVNT	b	2442	Ant1	2387-2400	2398.27	-51.59	NA	0.0069	NA	25	25	Pass
NVNT	b	2442	Ant1	2483.5-2496.5	2486.71	-52.40	NA	0.0058	NA	25	25	Pass
NVNT	b	2442	Ant1	2496.5-13000	2496.50	-51.66	NA	0.0068	NA	2.5	2.5	Pass
NVNT	b	2472	Ant1	30-1000	900.09	-57.32	NA	0.0019	NA	2.5	2.5	Pass
NVNT	b	2472	Ant1	1000-2387	2374.52	-54.48	NA	0.0036	NA	2.5	2.5	Pass
NVNT	b	2472	Ant1	2387-2400	2392.24	-51.84	NA	0.0065	NA	25	25	Pass
NVNT	b	2472	Ant1	2483.5-2496.5	2483.73	-39.02	NA	0.1253	NA	25	25	Pass
NVNT	b	2472	Ant1	2496.5-13000	3494.33	-37.97	NA	0.1596	NA	2.5	2.5	Pass
NVNT	g	2412	Ant1	30-1000	712.88	-58.68	NA	0.0014	NA	2.5	2.5	Pass
NVNT	g	2412	Ant1	1000-2387	2382.84	-49.52	NA	0.0112	NA	2.5	2.5	Pass
NVNT	g	2412	Ant1	2387-2400	2399.95	-21.81	NA	6.5917	NA	25	25	Pass
NVNT	g	2412	Ant1	2483.5-2496.5	2491.72	-51.10	NA	0.0078	NA	25	25	Pass
NVNT	g	2412	Ant1	2496.5-13000	2496.50	-52.37	NA	0.0058	NA	2.5	2.5	Pass
NVNT	g	2442	Ant1	30-1000	290.93	-58.42	NA	0.0014	NA	2.5	2.5	Pass
NVNT	g	2442	Ant1	1000-2387	2387.00	-53.13	NA	0.0049	NA	2.5	2.5	Pass
NVNT	g	2442	Ant1	2387-2400	2394.66	-49.55	NA	0.0111	NA	25	25	Pass
NVNT	g	2442	Ant1	2483.5-2496.5	2485.90	-50.92	NA	0.0081	NA	25	25	Pass
NVNT	g	2442	Ant1	2496.5-13000	2496.50	-51.71	NA	0.0067	NA	2.5	2.5	Pass
NVNT	g	2472	Ant1	30-1000	784.66	-57.59	NA	0.0017	NA	2.5	2.5	Pass
NVNT	g	2472	Ant1	1000-2387	2377.29	-53.07	NA	0.0049	NA	2.5	2.5	Pass
NVNT	g	2472	Ant1	2387-2400	2391.59	-51.83	NA	0.0066	NA	25	25	Pass
NVNT	g	2472	Ant1	2483.5-2496.5	2483.53	-20.63	NA	8.6497	NA	25	25	Pass
NVNT	g	2472	Ant1	2496.5-13000	2496.50	-44.96	NA	0.0319	NA	2.5	2.5	Pass
NVNT	n20	2412	Ant1	30-1000	912.70	-58.78	NA	0.0013	NA	2.5	2.5	Pass
NVNT	n20	2412	Ant1	1000-2387	2387.00	-49.93	NA	0.0102	NA	2.5	2.5	Pass
NVNT	n20	2412	Ant1	2387-2400	2399.95	-20.51	NA	8.892	NA	25	25	Pass
NVNT	n20	2412	Ant1	2483.5-2496.5	2486.59	-52.06	NA	0.0062	NA	25	25	Pass
NVNT	n20	2412	Ant1	2496.5-13000	2622.54	-53.34	NA	0.0046	NA	2.5	2.5	Pass
NVNT	n20	2442	Ant1	30-1000	746.83	-59.04	NA	0.0012	NA	2.5	2.5	Pass
NVNT	n20	2442	Ant1	1000-2387	2363.42	-53.04	NA	0.005	NA	2.5	2.5	Pass


NVNT	n20	2442	Ant1	2387-2400	2395.41	-51.24	NA	0.0075	NA	25	25	Pass
NVNT	n20	2442	Ant1	2483.5-2496.5	2485.87	-50.53	NA	0.0089	NA	25	25	Pass
NVNT	n20	2442	Ant1	2496.5-13000	2496.50	-52.36	NA	0.0058	NA	2.5	2.5	Pass
NVNT	n20	2472	Ant1	30-1000	787.57	-57.80	NA	0.0017	NA	2.5	2.5	Pass
NVNT	n20	2472	Ant1	1000-2387	2312.10	-52.76	NA	0.0053	NA	2.5	2.5	Pass
NVNT	n20	2472	Ant1	2387-2400	2397.09	-51.41	NA	0.0072	NA	25	25	Pass
NVNT	n20	2472	Ant1	2483.5-2496.5	2483.50	-18.95	-34.63	12.735	0.3443	25	25	Pass
NVNT	n20	2472	Ant1	2496.5-13000	2496.50	-48.85	NA	0.013	NA	2.5	2.5	Pass
NVNT	n40	2422	Ant1	30-1000	30.00	-52.60	NA	0.0055	NA	2.5	2.5	Pass
NVNT	n40	2422	Ant1	1000-2387	2385.61	-37.97	NA	0.1596	NA	2.5	2.5	Pass
NVNT	n40	2422	Ant1	2387-2400	2399.83	-18.44	-36.45	14.3219	0.2265	25	25	Pass
NVNT	n40	2422	Ant1	2483.5-2496.5	2485.28	-45.08	NA	0.031	NA	25	25	Pass
NVNT	n40	2422	Ant1	2496.5-13000	2496.50	-49.82	NA	0.0104	NA	2.5	2.5	Pass
NVNT	n40	2442	Ant1	30-1000	30.00	-52.55	NA	0.0056	NA	2.5	2.5	Pass
NVNT	n40	2442	Ant1	1000-2387	2387.00	-43.05	NA	0.0495	NA	2.5	2.5	Pass
NVNT	n40	2442	Ant1	2387-2400	2399.14	-35.88	NA	0.2582	NA	25	25	Pass
NVNT	n40	2442	Ant1	2483.5-2496.5	2483.68	-31.69	NA	0.6776	NA	25	25	Pass
NVNT	n40	2442	Ant1	2496.5-13000	2496.50	-36.98	NA	0.2004	NA	2.5	2.5	Pass
NVNT	n40	2462	Ant1	30-1000	33.88	-54.03	NA	0.004	NA	2.5	2.5	Pass
NVNT	n40	2462	Ant1	1000-2387	2385.61	-49.06	NA	0.0124	NA	2.5	2.5	Pass
NVNT	n40	2462	Ant1	2387-2400	2399.78	-44.23	NA	0.0378	NA	25	25	Pass
NVNT	n40	2462	Ant1	2483.5-2496.5	2483.55	-18.14	-34.42	15.3462	0.3614	25	25	Pass
NVNT	n40	2462	Ant1	2496.5-13000	2496.50	-33.71	NA	0.4256	NA	2.5	2.5	Pass

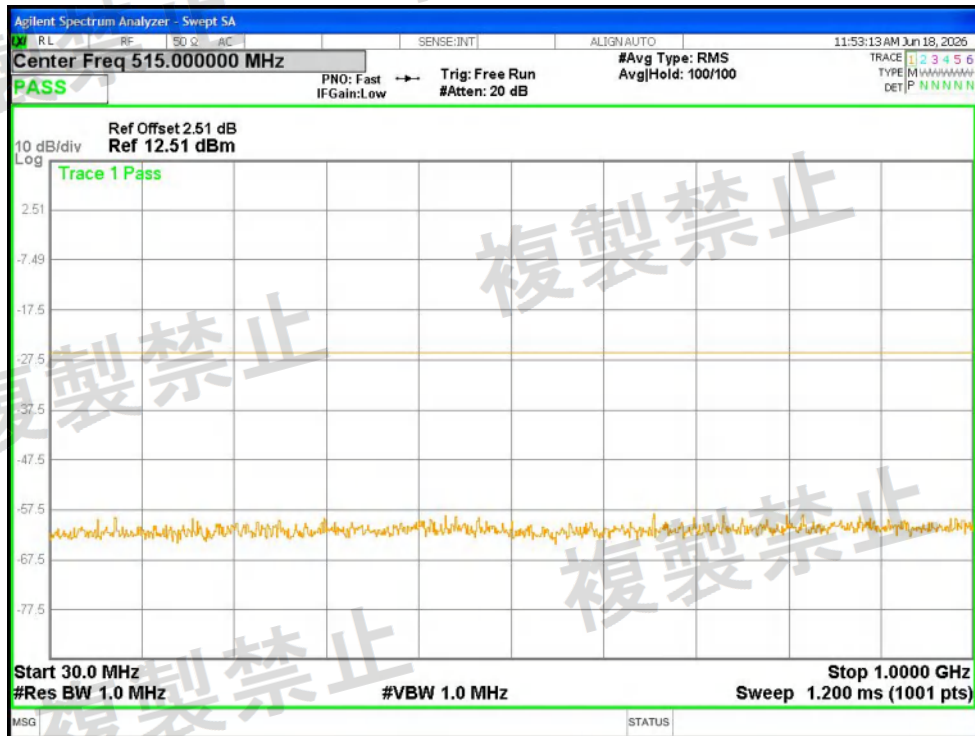


Tx. Spurious NVNT b 2412MHz Ant1 @ 30MHz-1000MHz

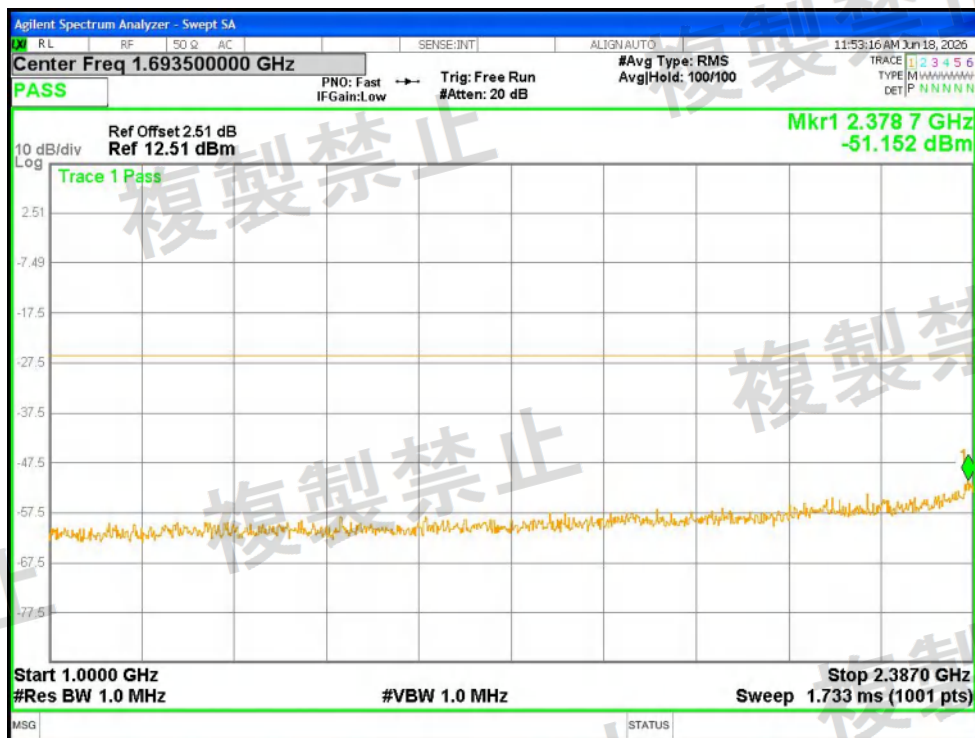


Tx. Spurious NVNT b 2412MHz Ant1 @ 1000MHz-2387MHz

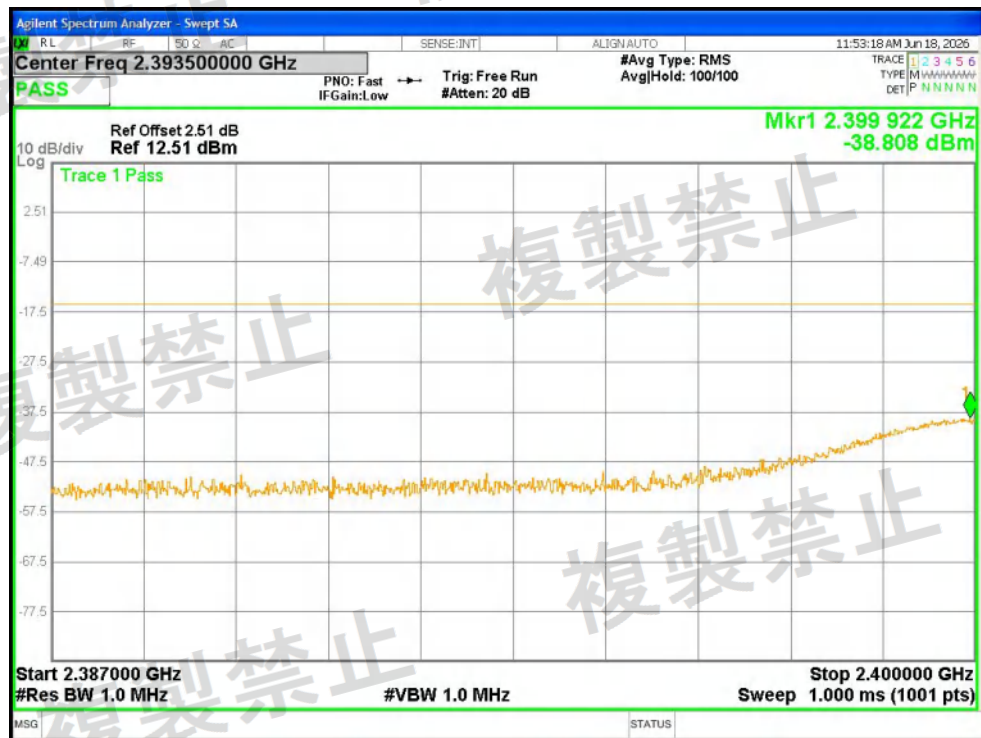


Tx. Spurious NVNT b 2412MHz Ant1 @ 2387MHz-2400MHz

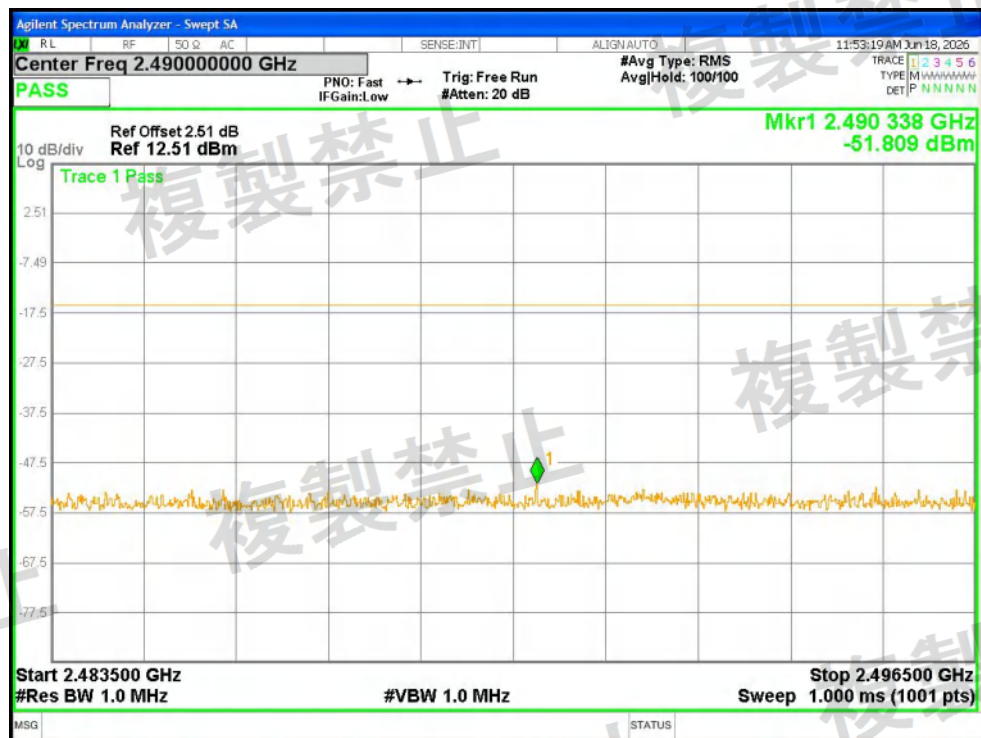


Tx. Spurious NVNT b 2412MHz Ant1 @ 2483.5MHz-2496.5MHz

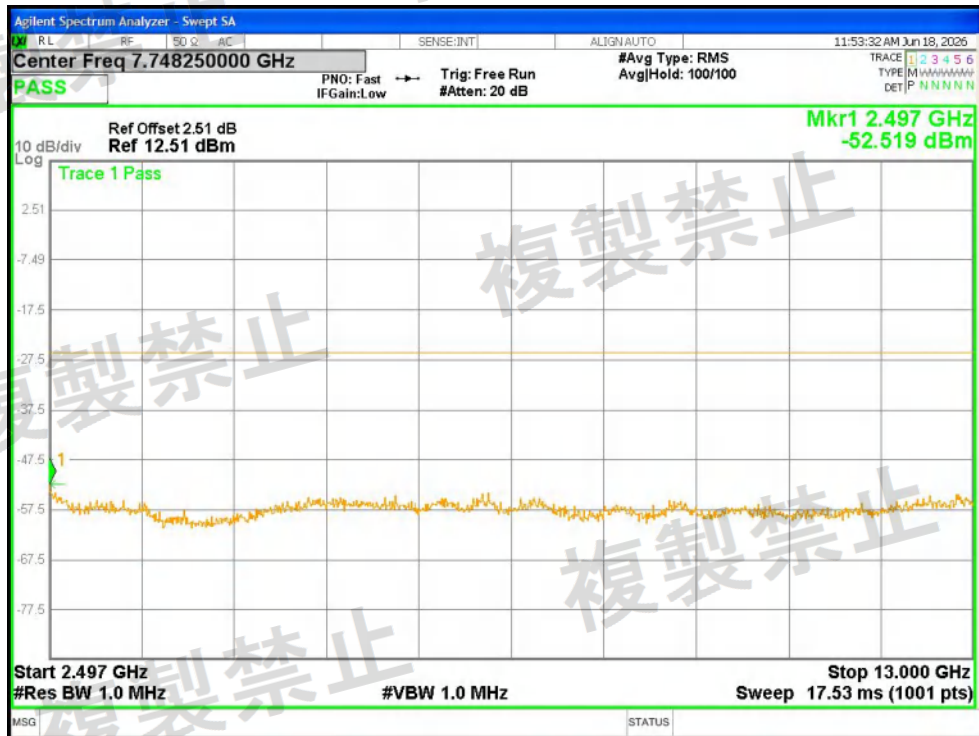


Tx. Spurious NVNT b 2412MHz Ant1 @ 2496.5MHz-13000MHz

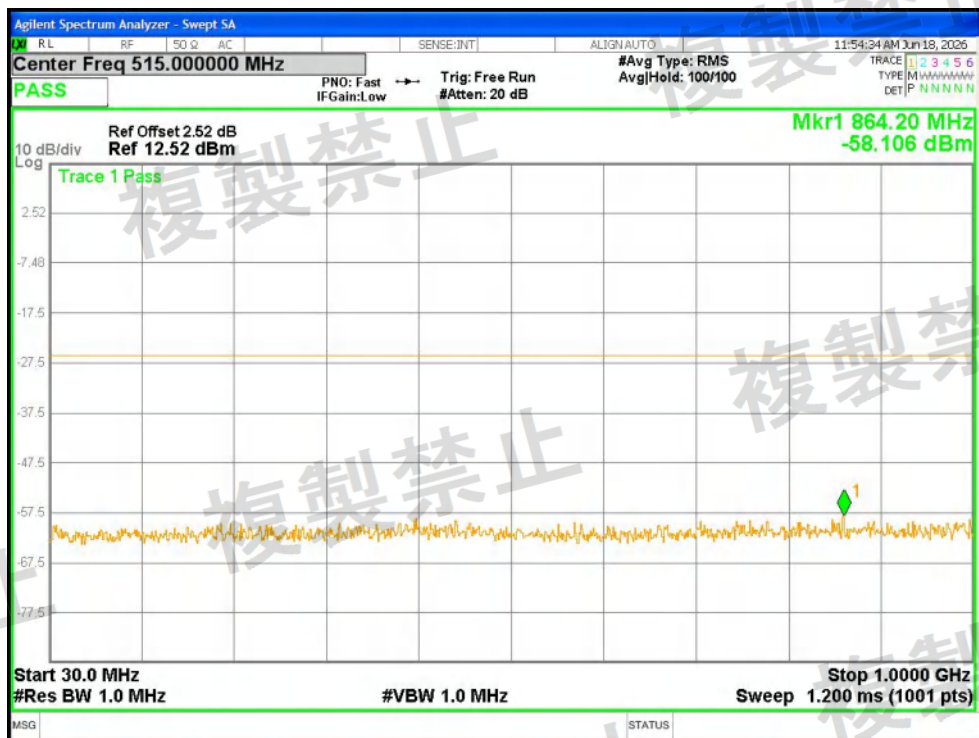


Tx. Spurious NVNT b 2442MHz Ant1 @ 30MHz-1000MHz

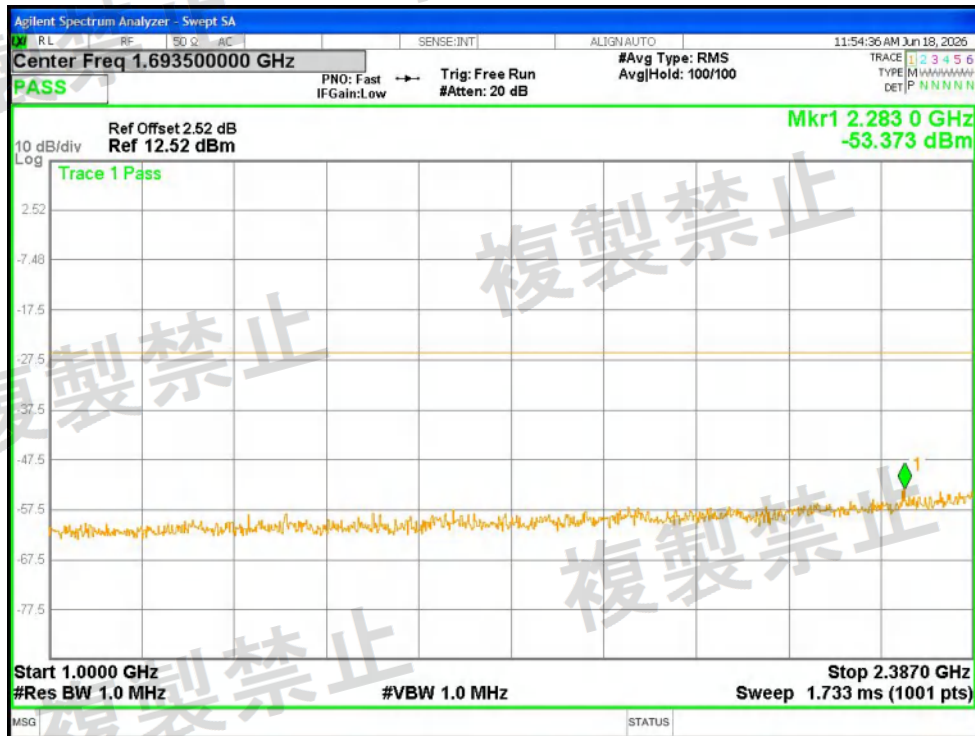


Tx. Spurious NVNT b 2442MHz Ant1 @ 1000MHz-2387MHz

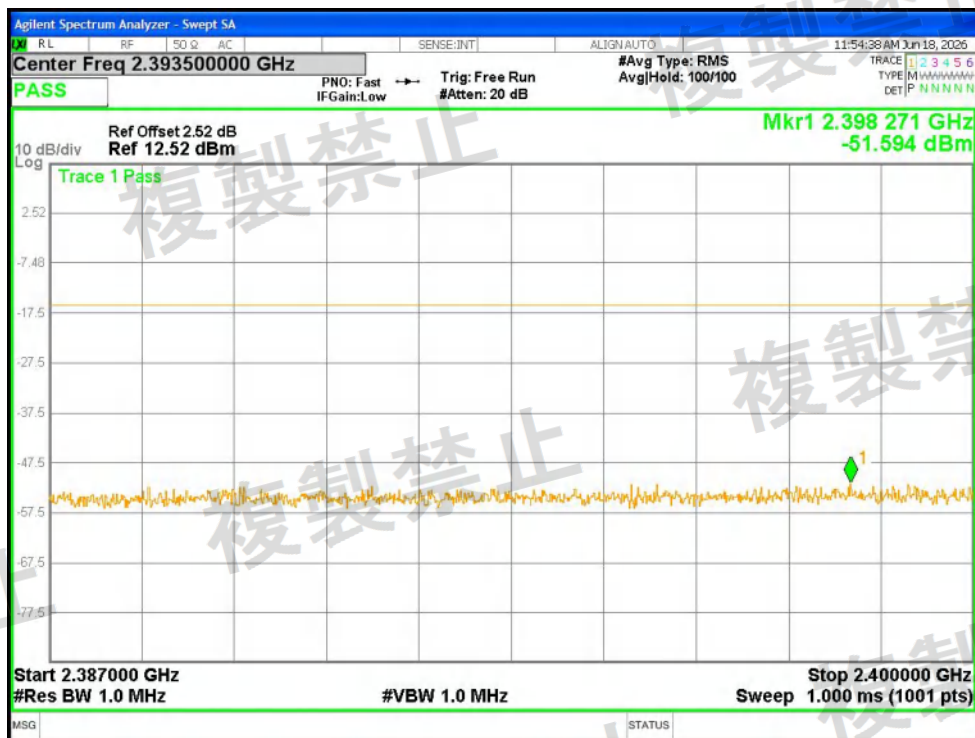


Tx. Spurious NVNT b 2442MHz Ant1 @ 2387MHz-2400MHz

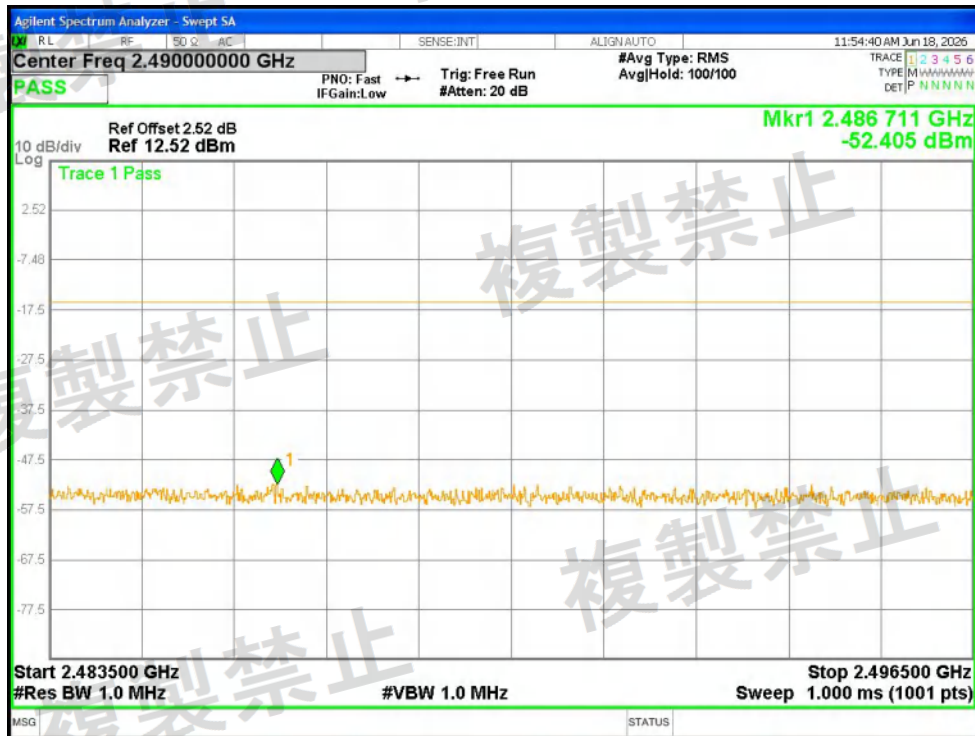


Tx. Spurious NVNT b 2442MHz Ant1 @ 2483.5MHz-2496.5MHz

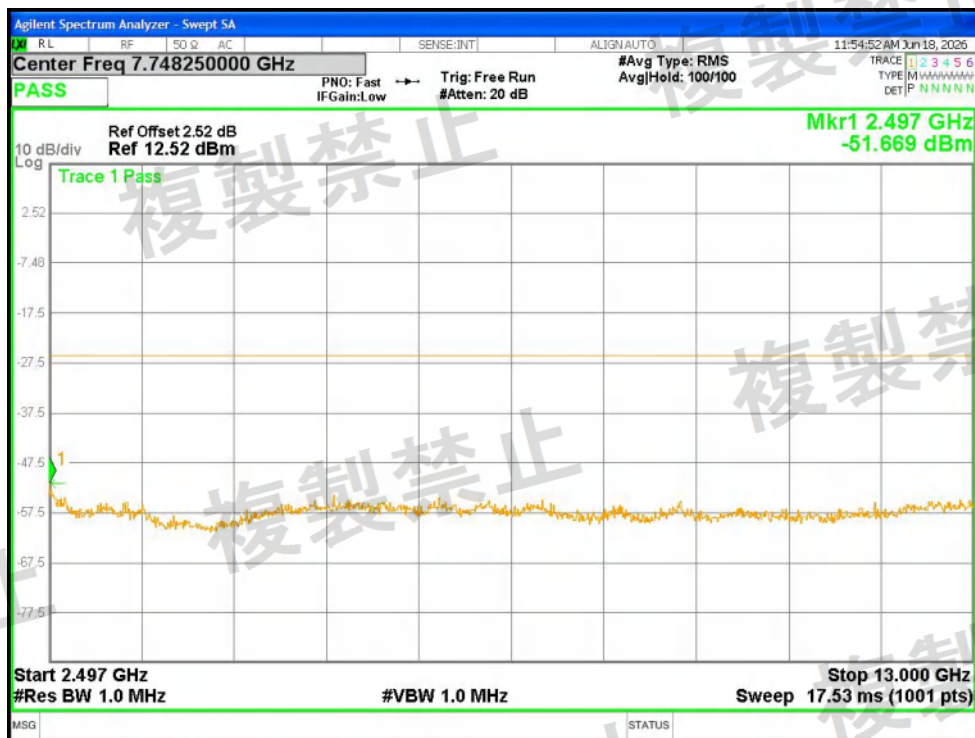


Tx. Spurious NVNT b 2442MHz Ant1 @ 2496.5MHz-13000MHz

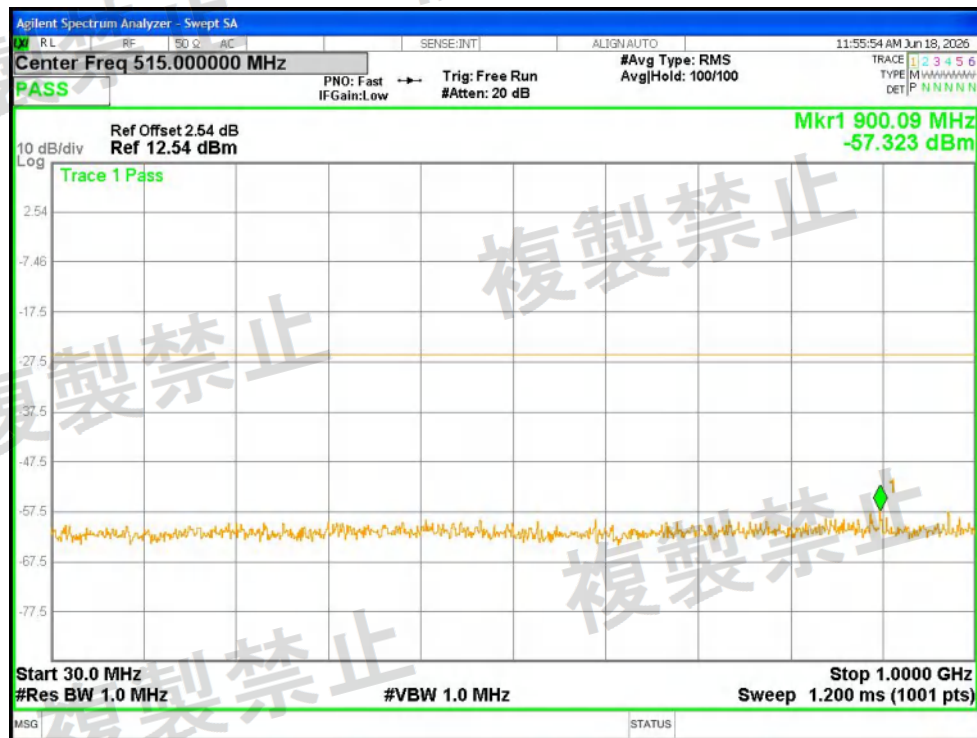


Tx. Spurious NVNT b 2472MHz Ant1 @ 30MHz-1000MHz

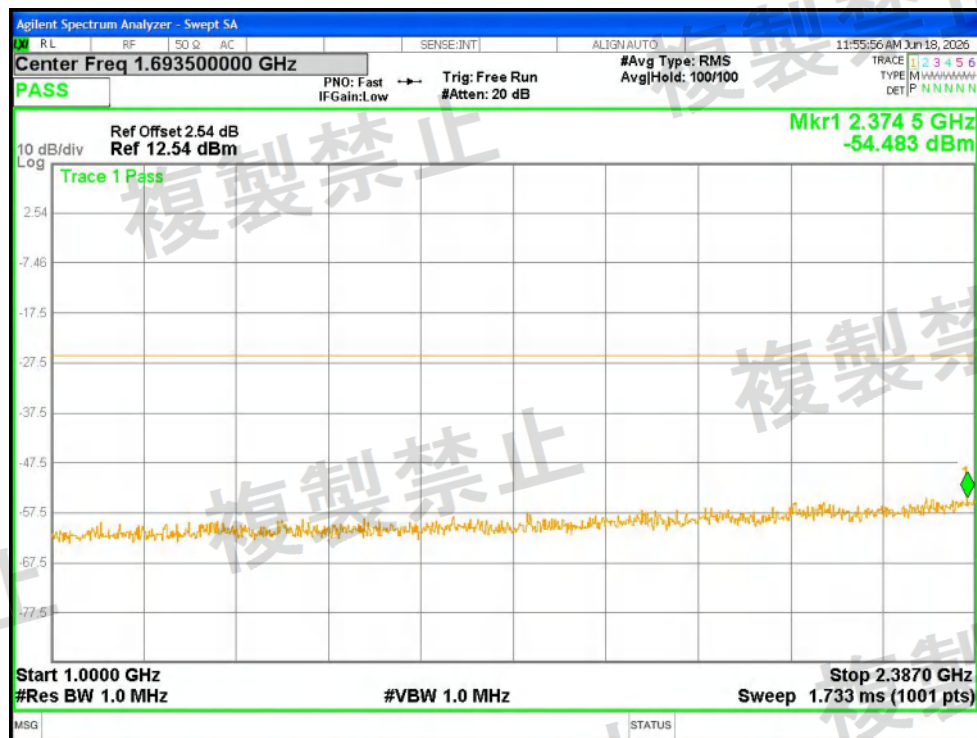


Tx. Spurious NVNT b 2472MHz Ant1 @ 1000MHz-2387MHz

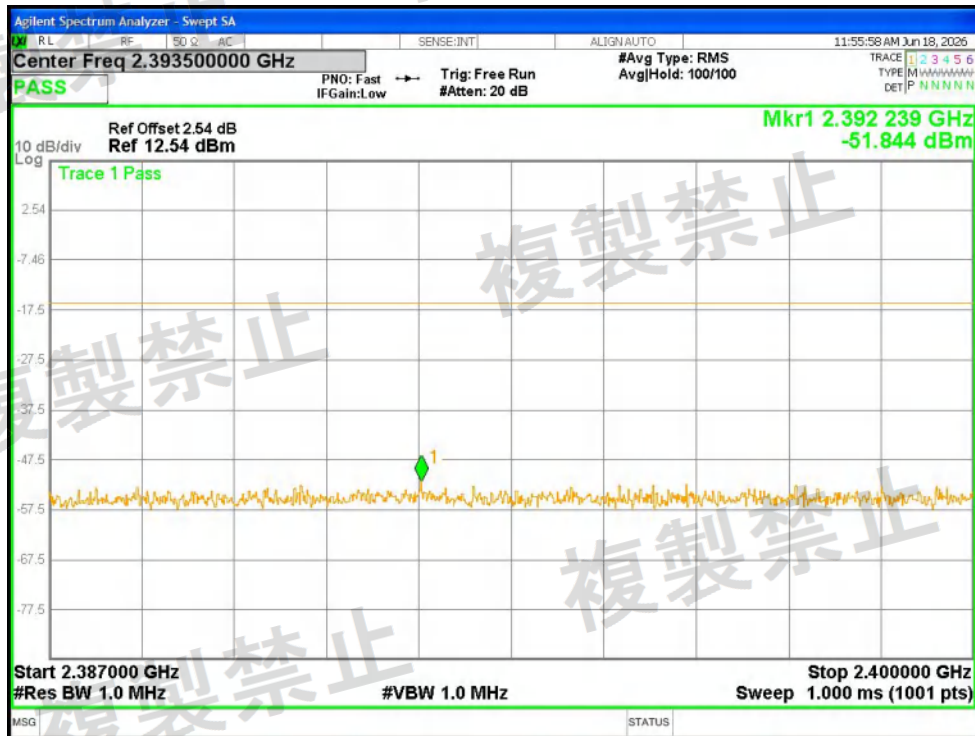


Tx. Spurious NVNT b 2472MHz Ant1 @ 2387MHz-2400MHz

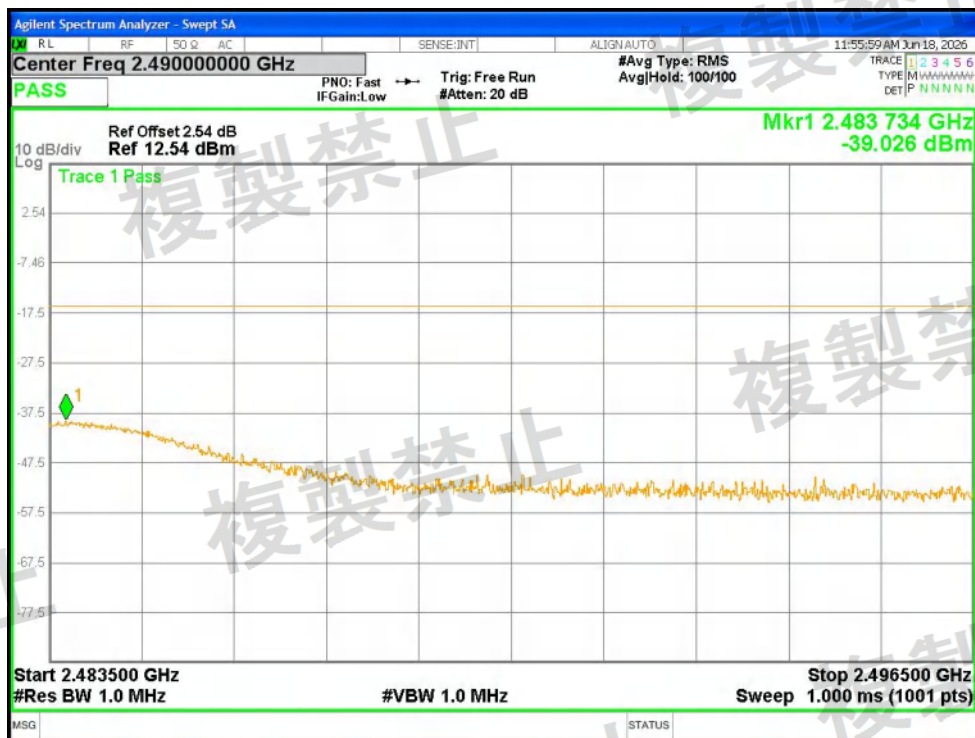


Tx. Spurious NVNT b 2472MHz Ant1 @ 2483.5MHz-2496.5MHz

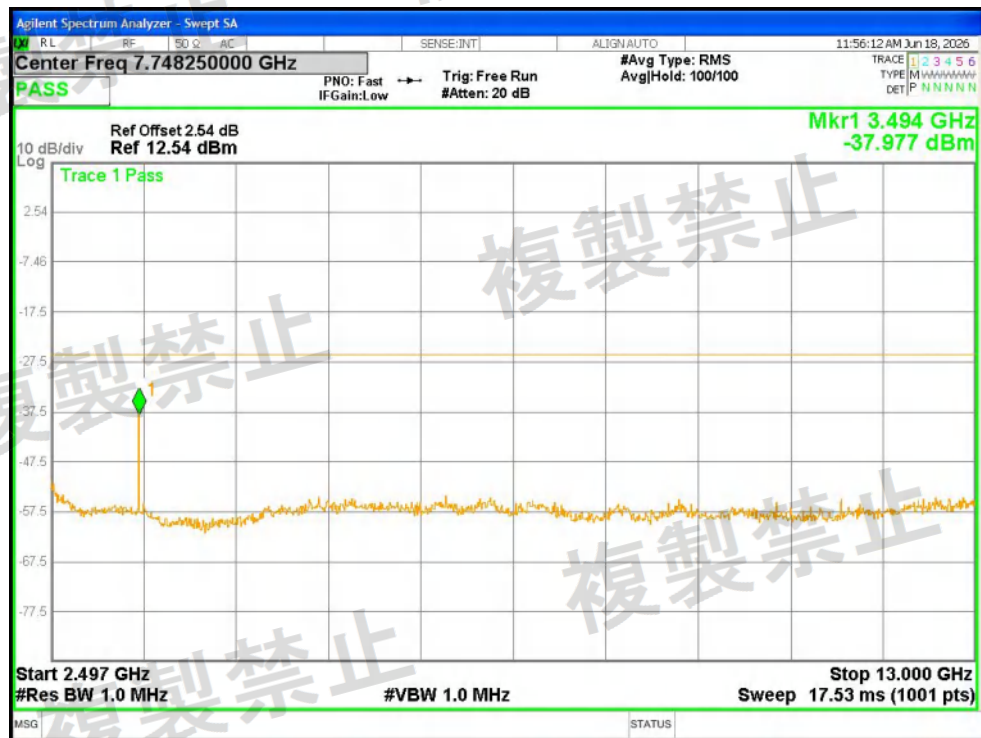


Tx. Spurious NVNT b 2472MHz Ant1 @ 2496.5MHz-13000MHz

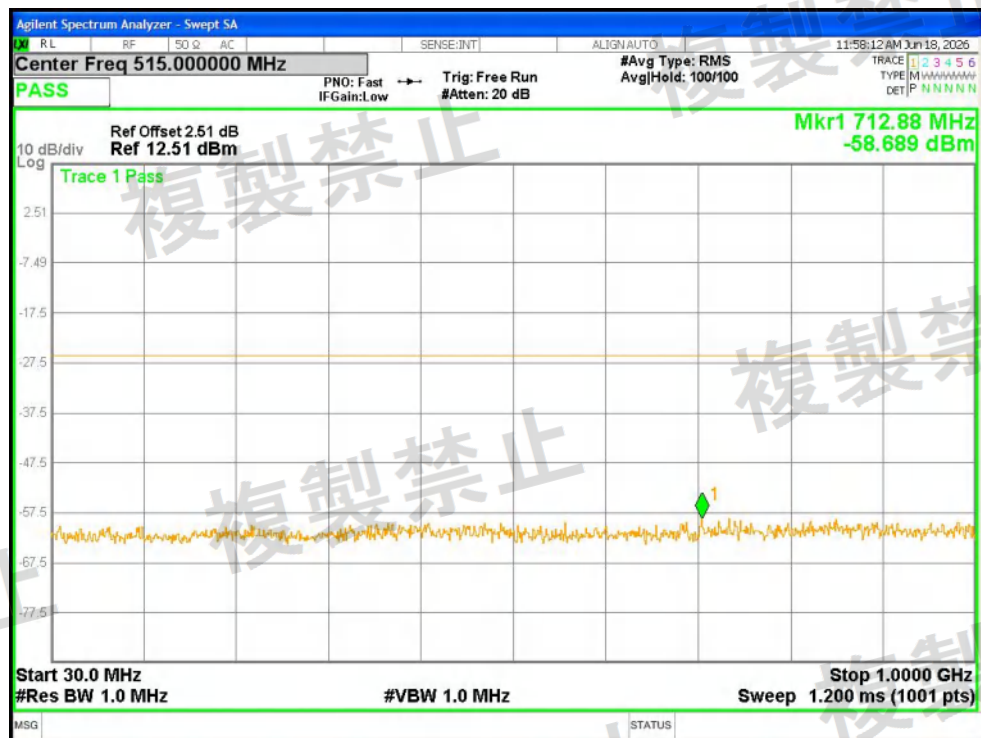


Tx. Spurious NVNT g 2412MHz Ant1 @ 30MHz-1000MHz

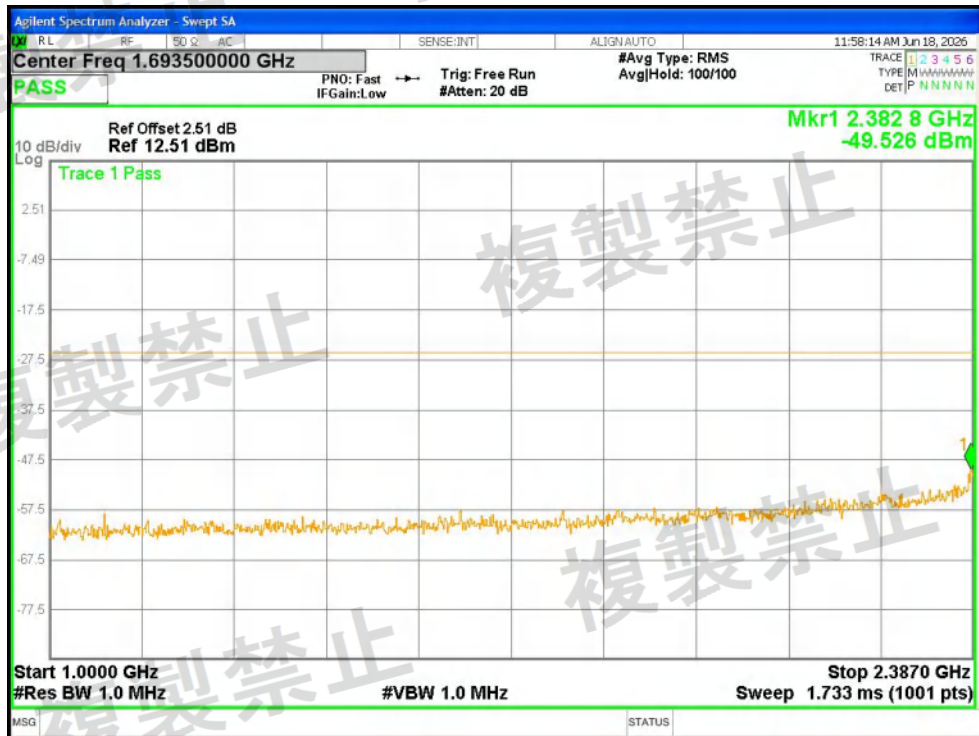


Tx. Spurious NVNT g 2412MHz Ant1 @ 1000MHz-2387MHz

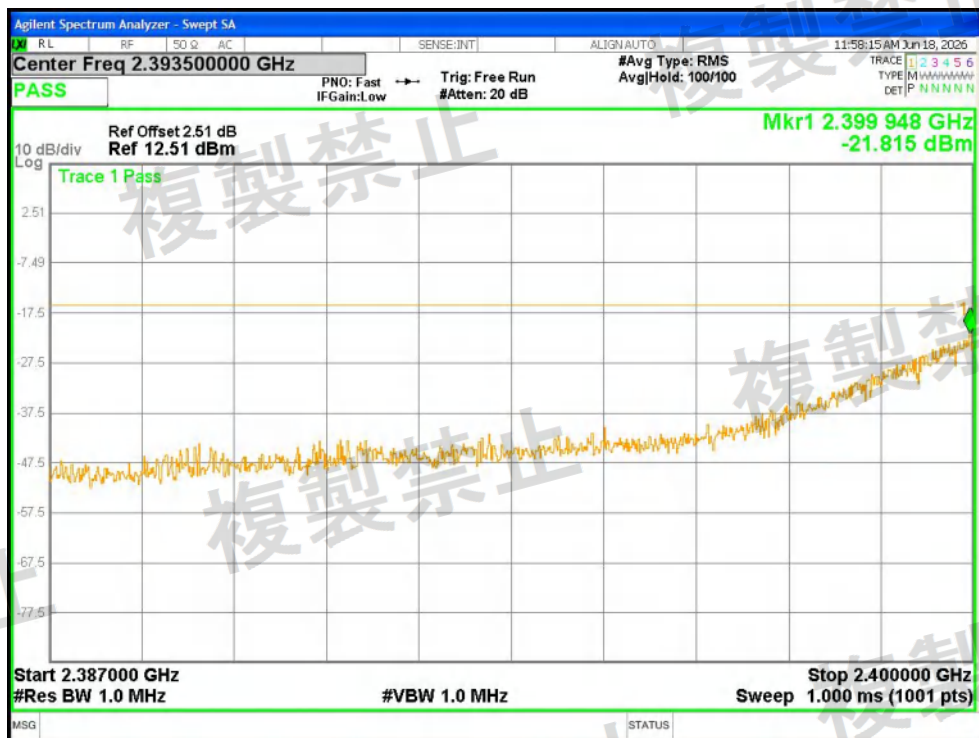


Tx. Spurious NVNT g 2412MHz Ant1 @ 2387MHz-2400MHz

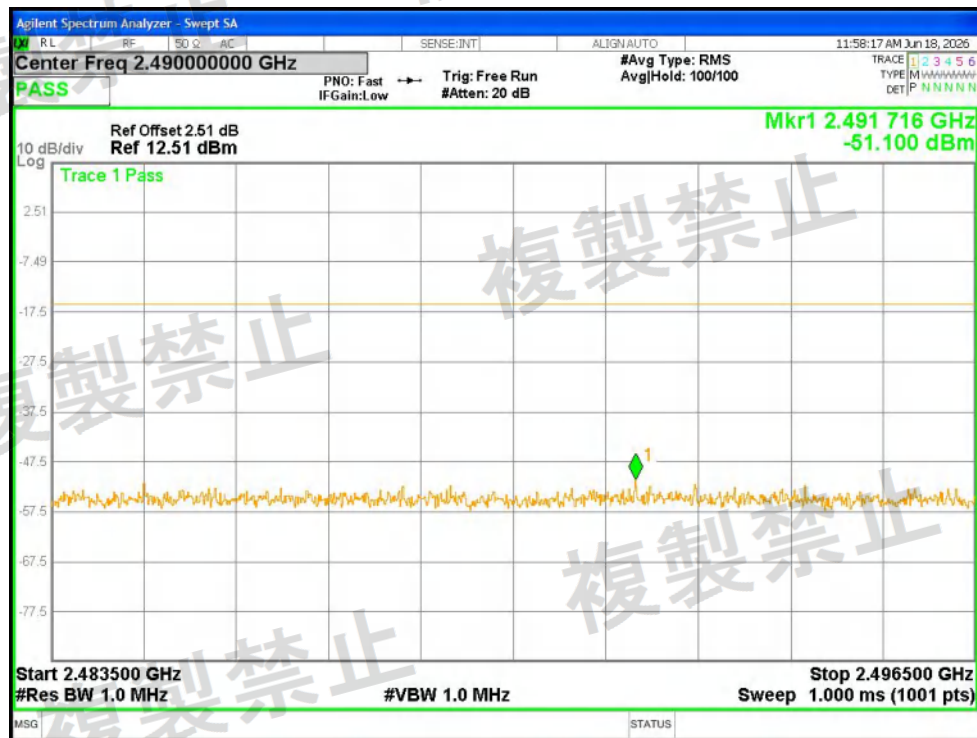


Tx. Spurious NVNT g 2412MHz Ant1 @ 2483.5MHz-2496.5MHz

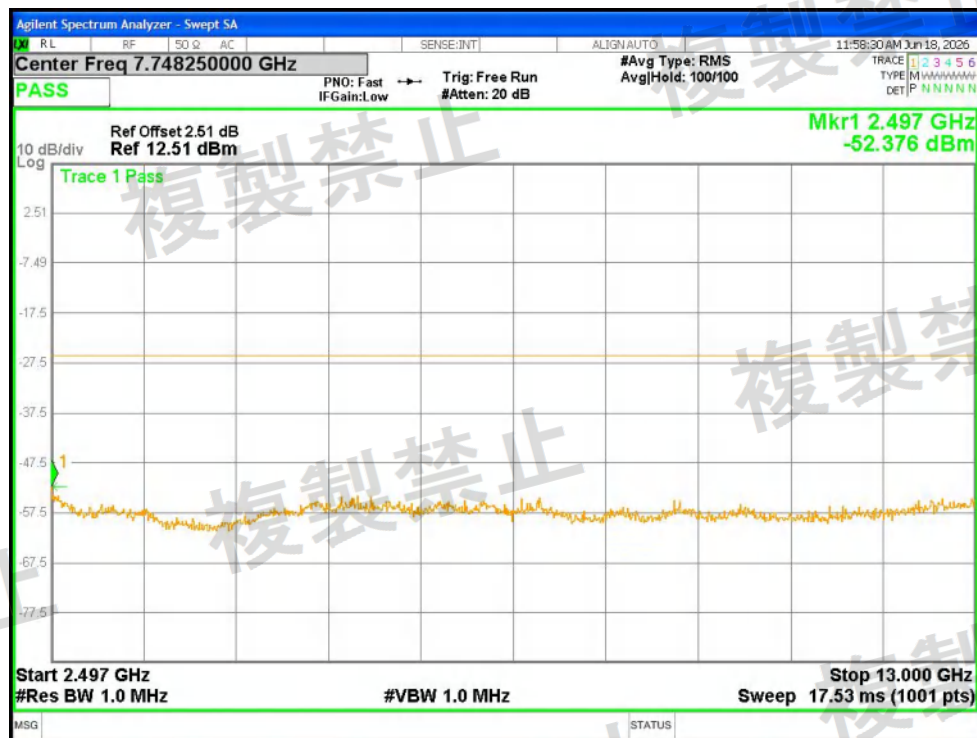


Tx. Spurious NVNT g 2412MHz Ant1 @ 2496.5MHz-13000MHz

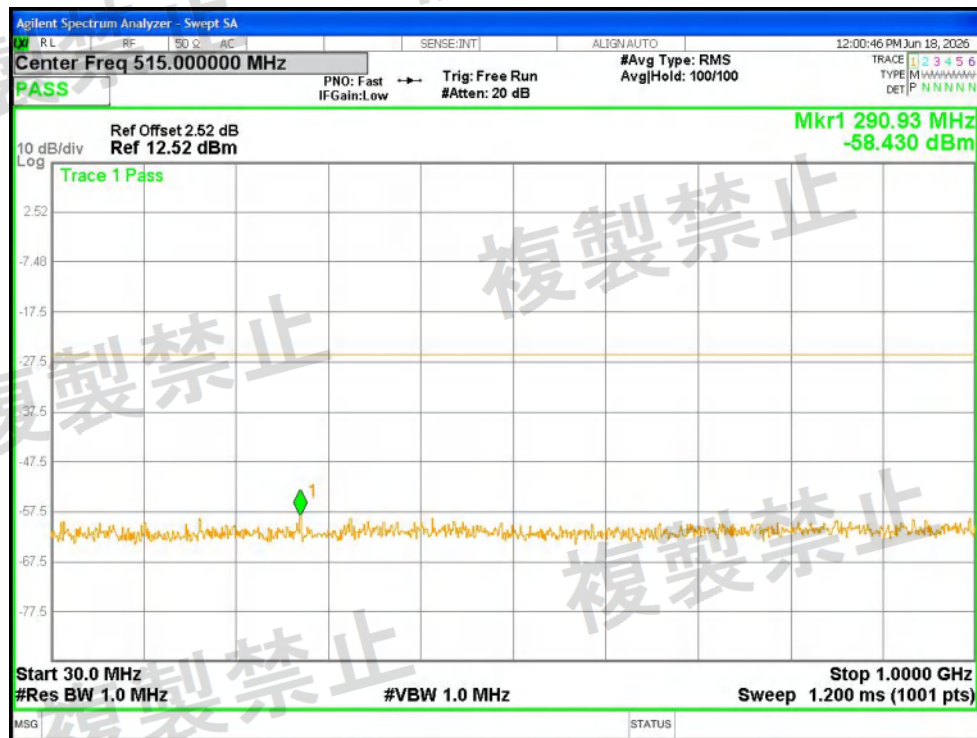


Tx. Spurious NVNT g 2442MHz Ant1 @ 30MHz-1000MHz

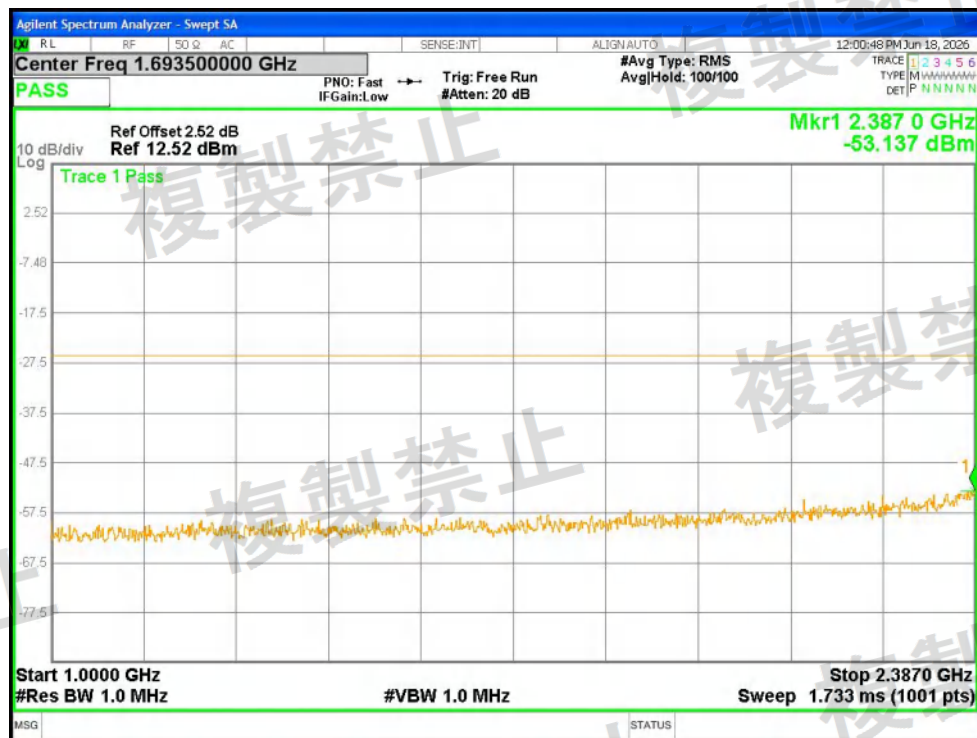


Tx. Spurious NVNT g 2442MHz Ant1 @ 1000MHz-2387MHz

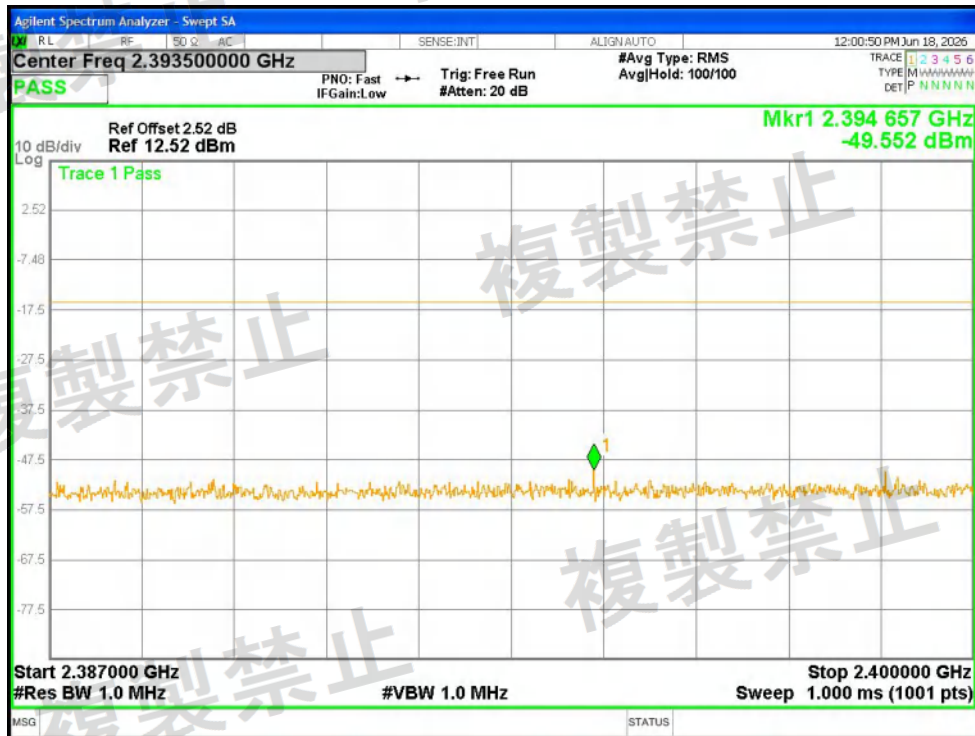


Tx. Spurious NVNT g 2442MHz Ant1 @ 2387MHz-2400MHz

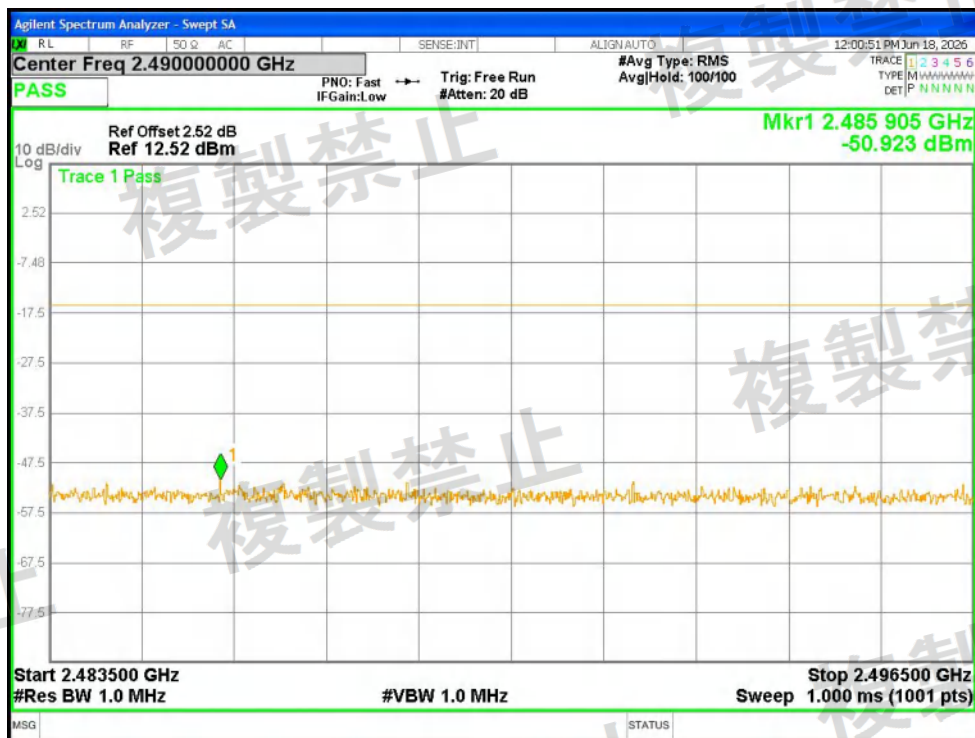


Tx. Spurious NVNT g 2442MHz Ant1 @ 2483.5MHz-2496.5MHz

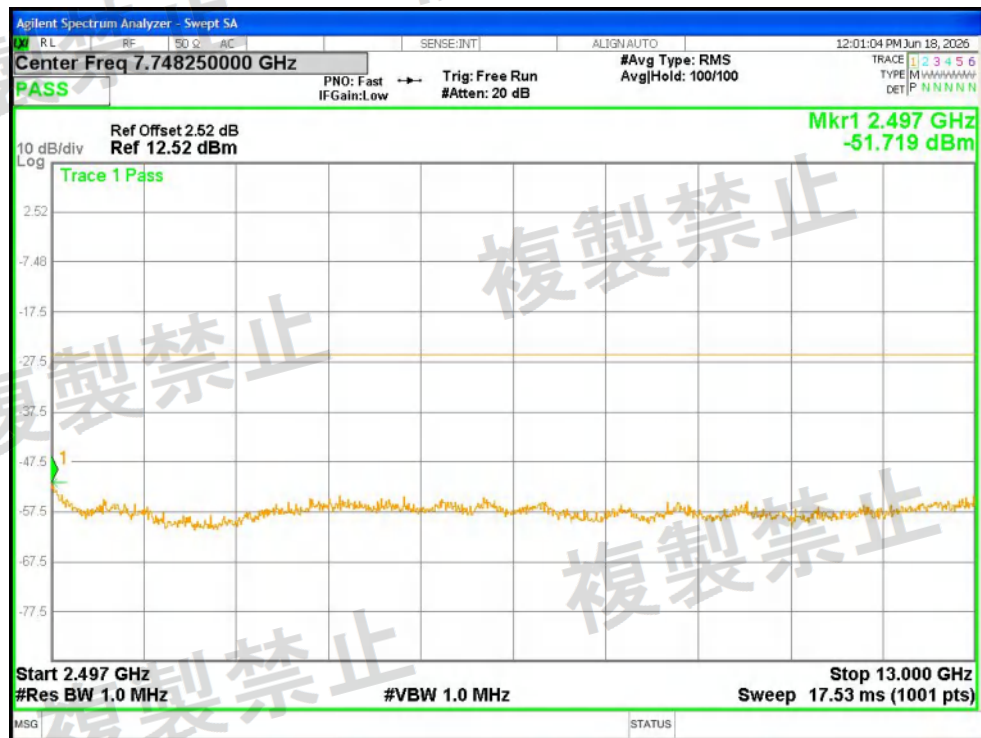


Tx. Spurious NVNT g 2442MHz Ant1 @ 2496.5MHz-13000MHz

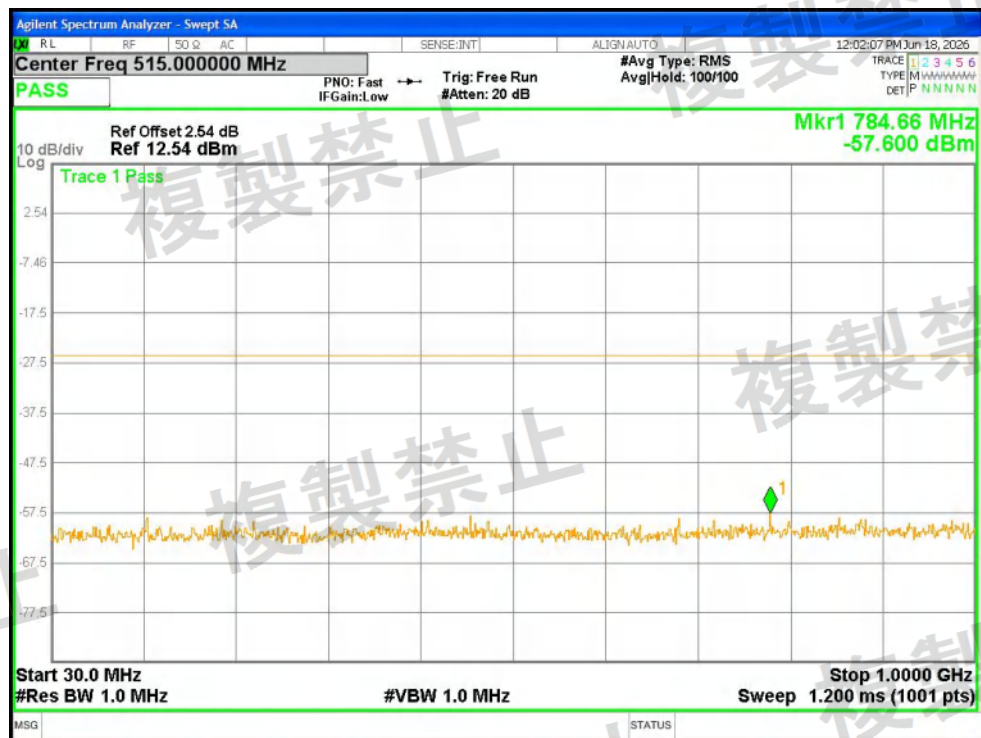


Tx. Spurious NVNT g 2472MHz Ant1 @ 30MHz-1000MHz

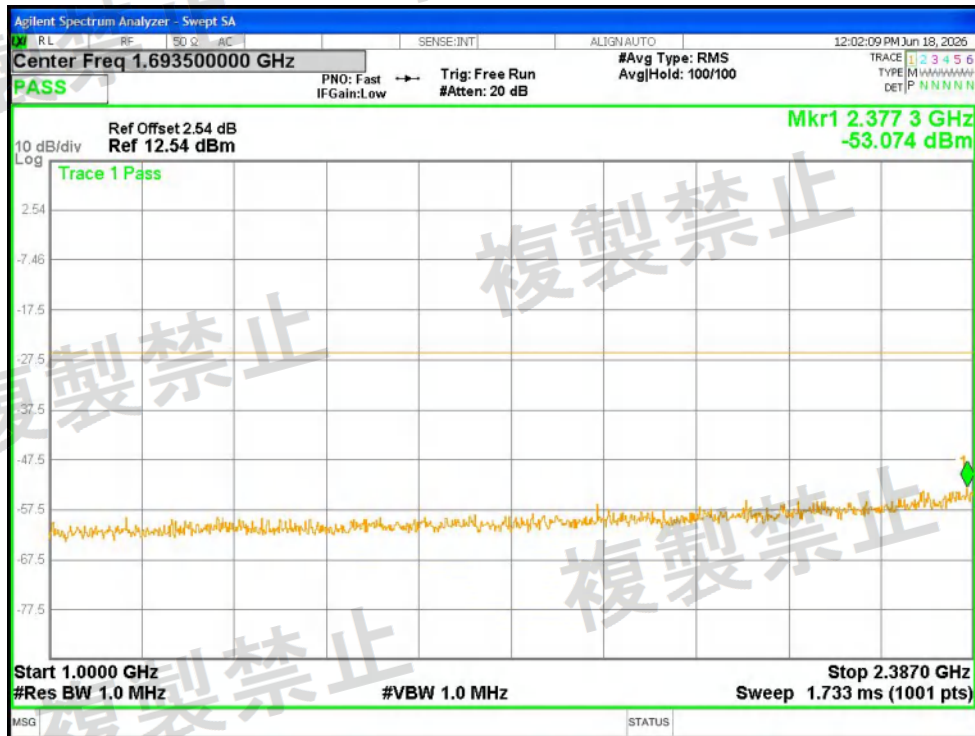


Tx. Spurious NVNT g 2472MHz Ant1 @ 1000MHz-2387MHz

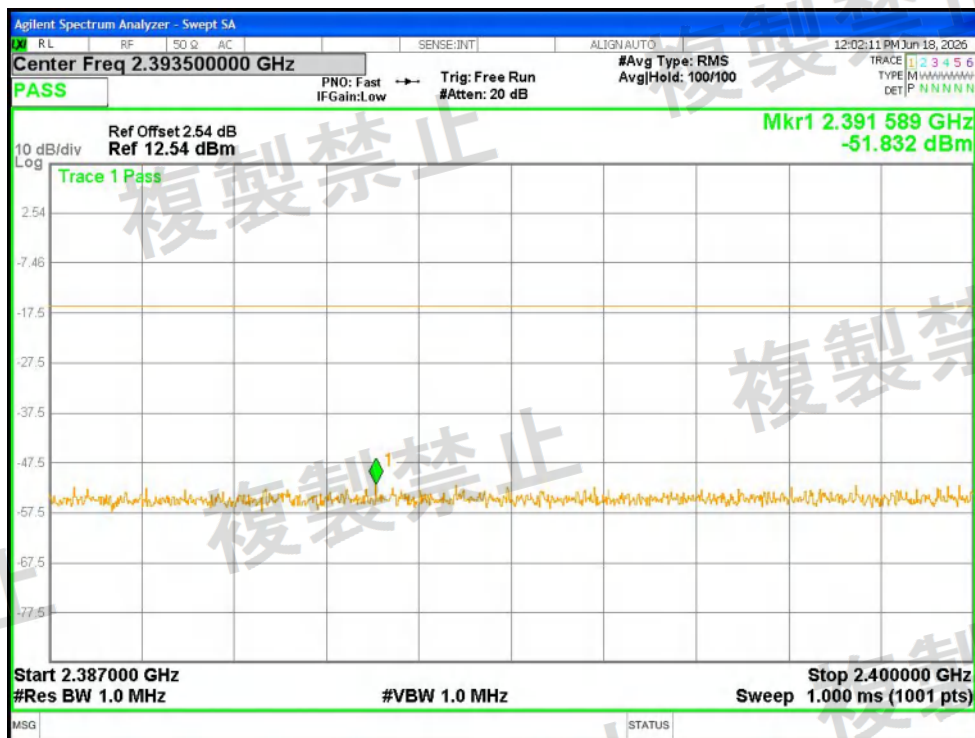


Tx. Spurious NVNT g 2472MHz Ant1 @ 2387MHz-2400MHz

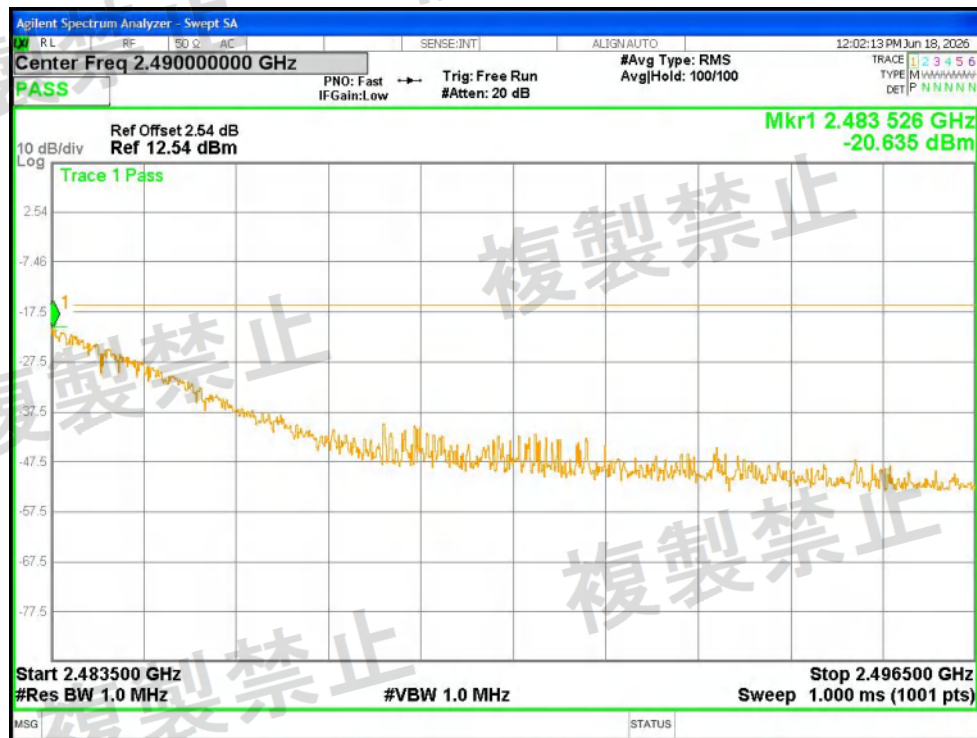


Tx. Spurious NVNT g 2472MHz Ant1 @ 2483.5MHz-2496.5MHz

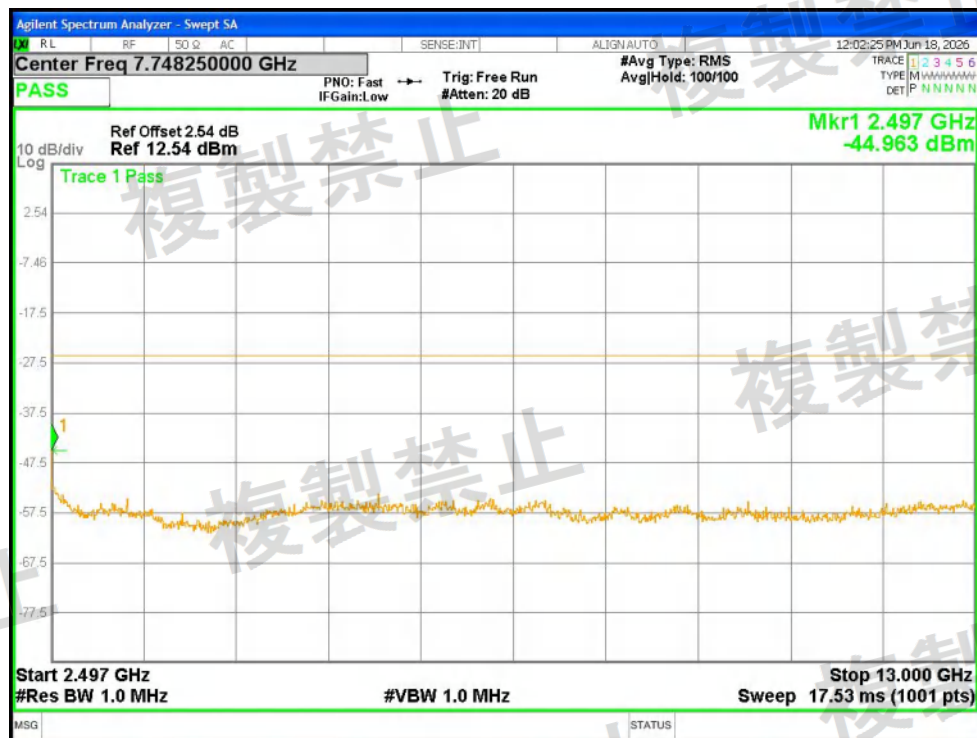


Tx. Spurious NVNT g 2472MHz Ant1 @ 2496.5MHz-13000MHz

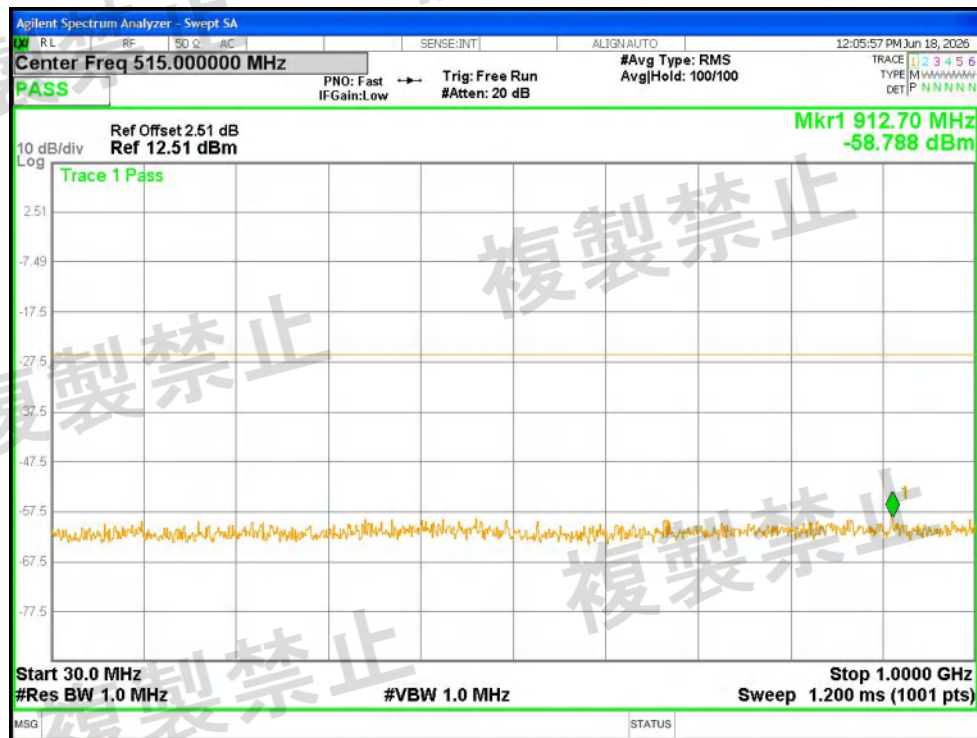


Tx. Spurious NVNT n20 2412MHz Ant1 @ 30MHz-1000MHz

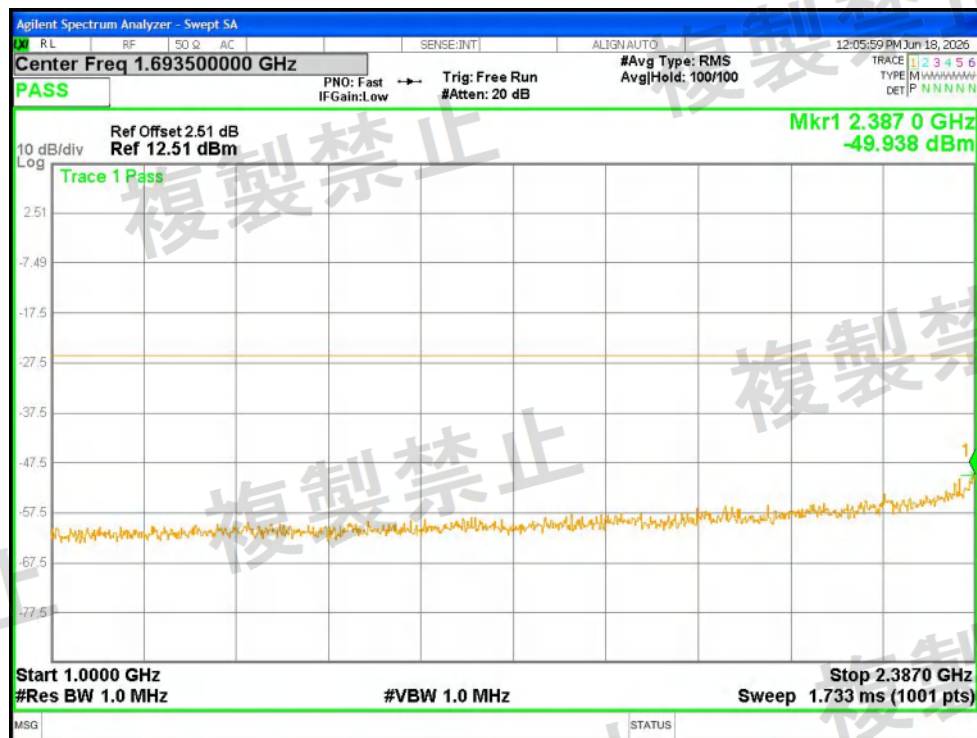


Tx. Spurious NVNT n20 2412MHz Ant1 @ 1000MHz-2387MHz

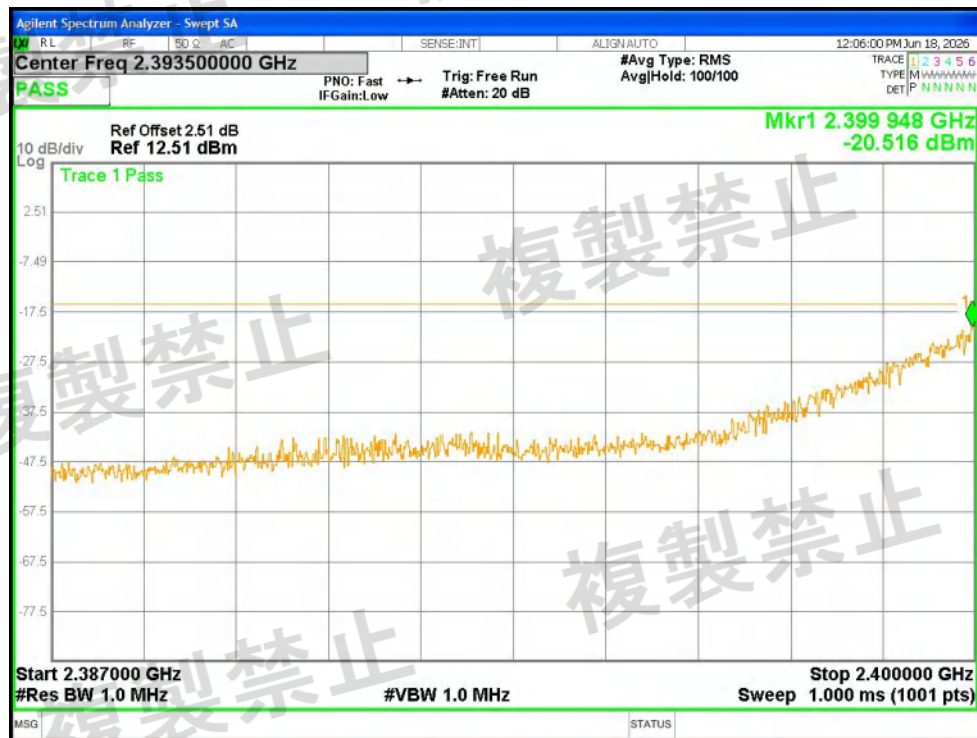


Tx. Spurious NVNT n20 2412MHz Ant1 @ 2387MHz-2400MHz

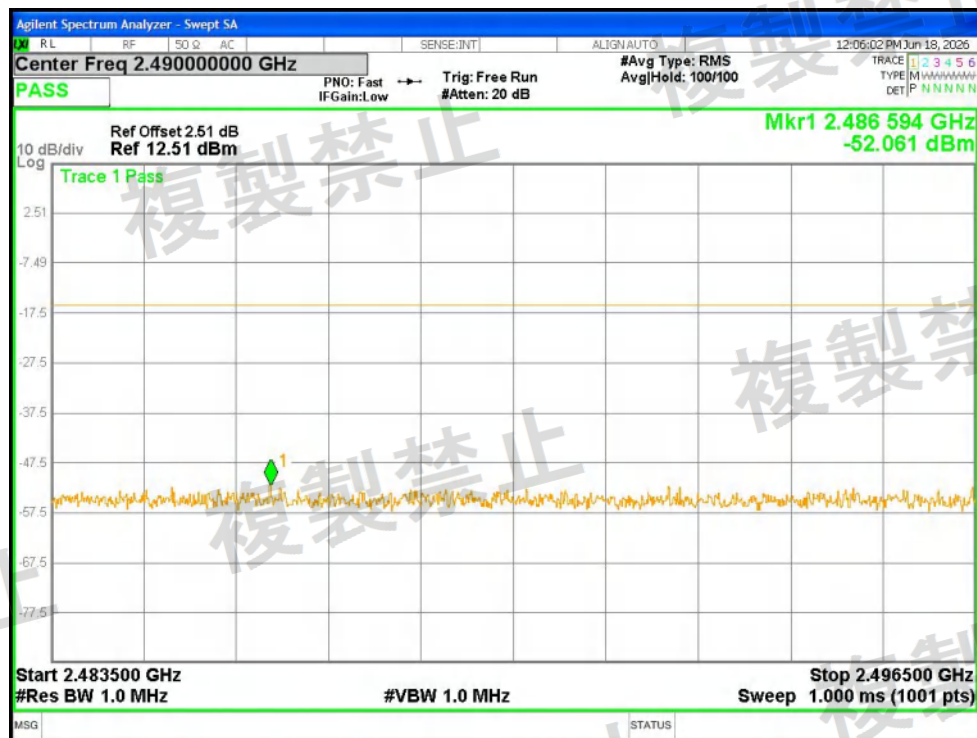


Tx. Spurious NVNT n20 2412MHz Ant1 @ 2483.5MHz-2496.5MHz

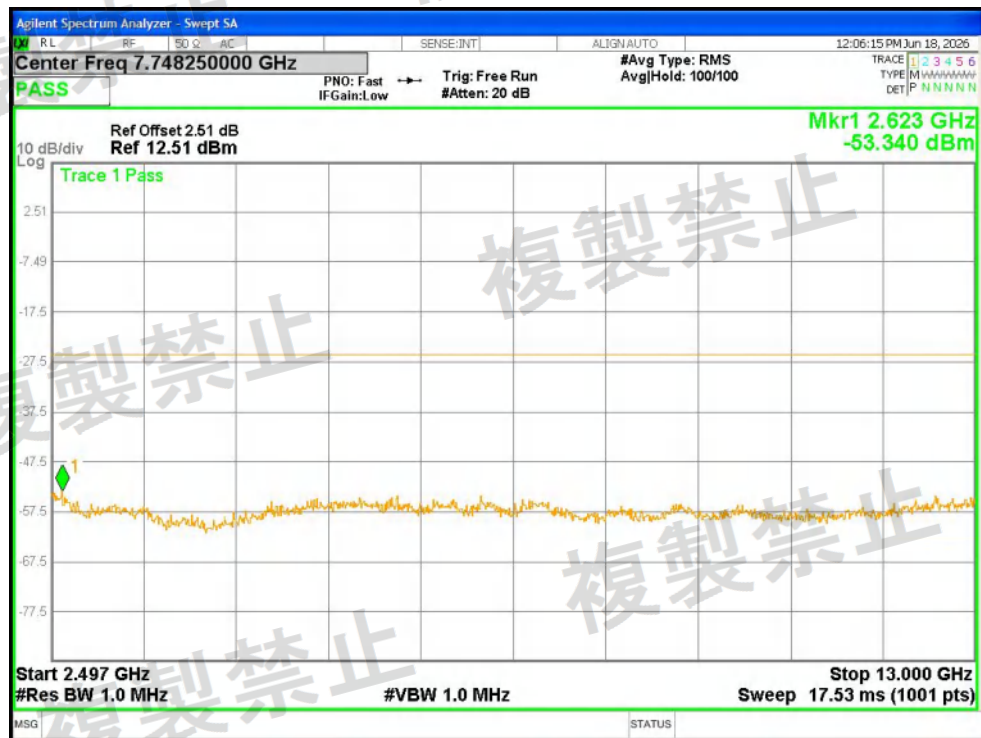


Tx. Spurious NVNT n20 2412MHz Ant1 @ 2496.5MHz-13000MHz

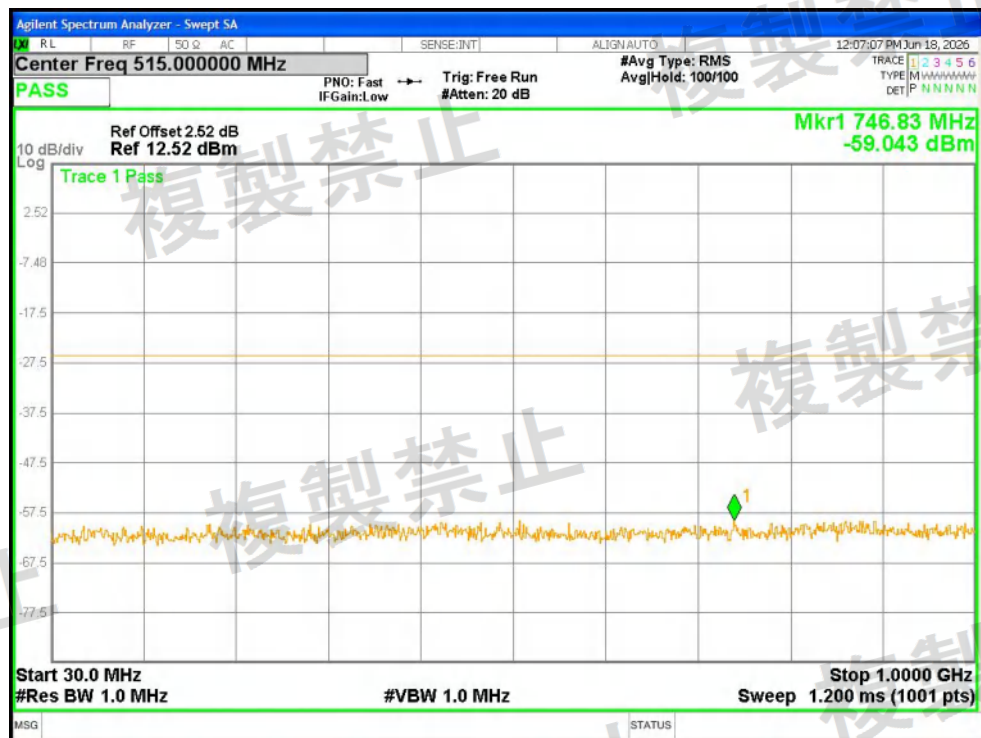


Tx. Spurious NVNT n20 2442MHz Ant1 @ 30MHz-1000MHz

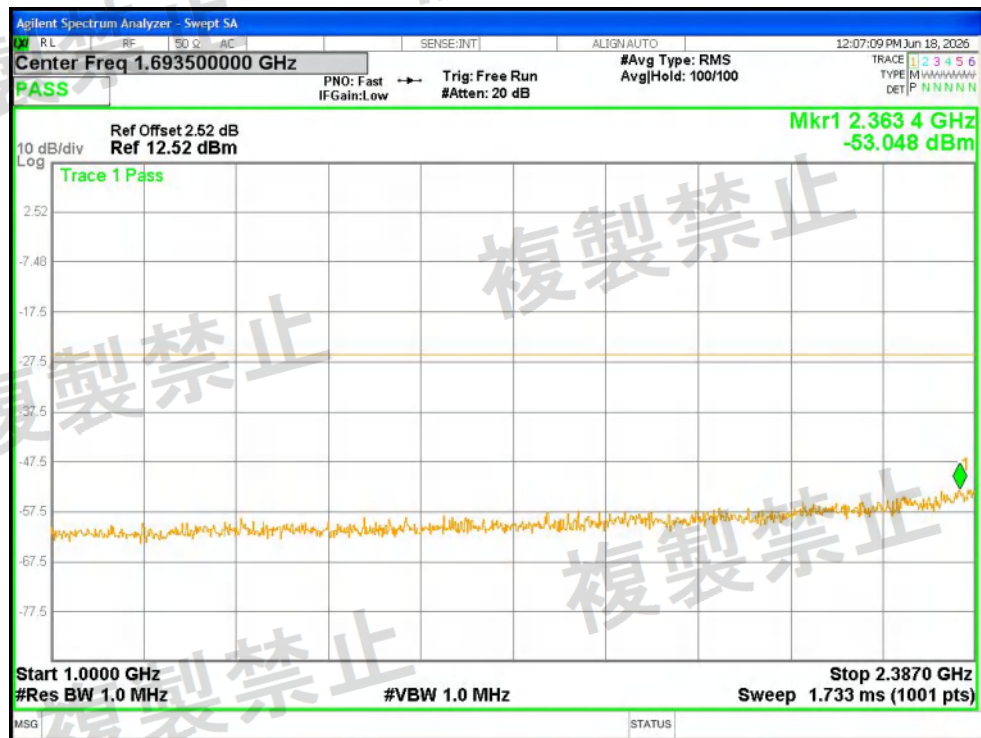


Tx. Spurious NVNT n20 2442MHz Ant1 @ 1000MHz-2387MHz

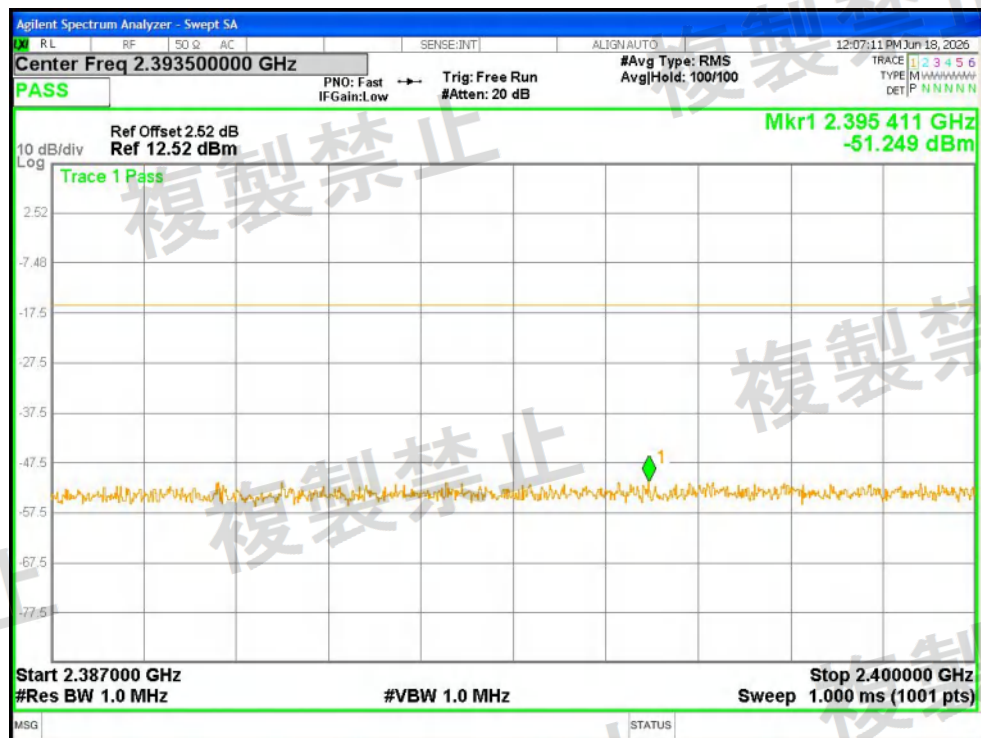


Tx. Spurious NVNT n20 2442MHz Ant1 @ 2387MHz-2400MHz

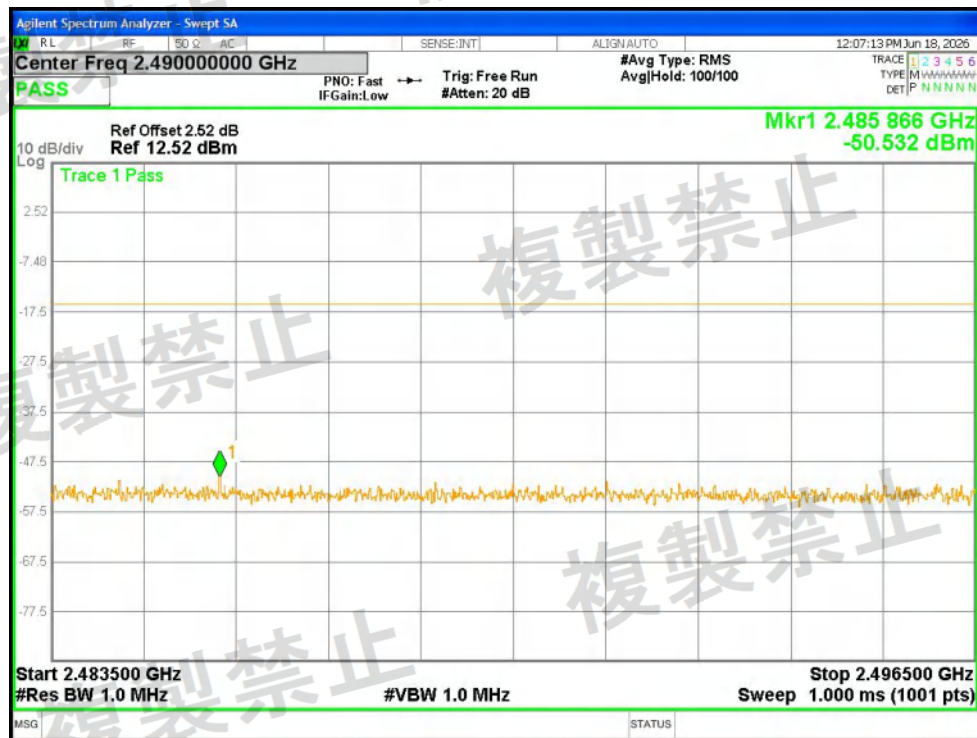


Tx. Spurious NVNT n20 2442MHz Ant1 @ 2483.5MHz-2496.5MHz

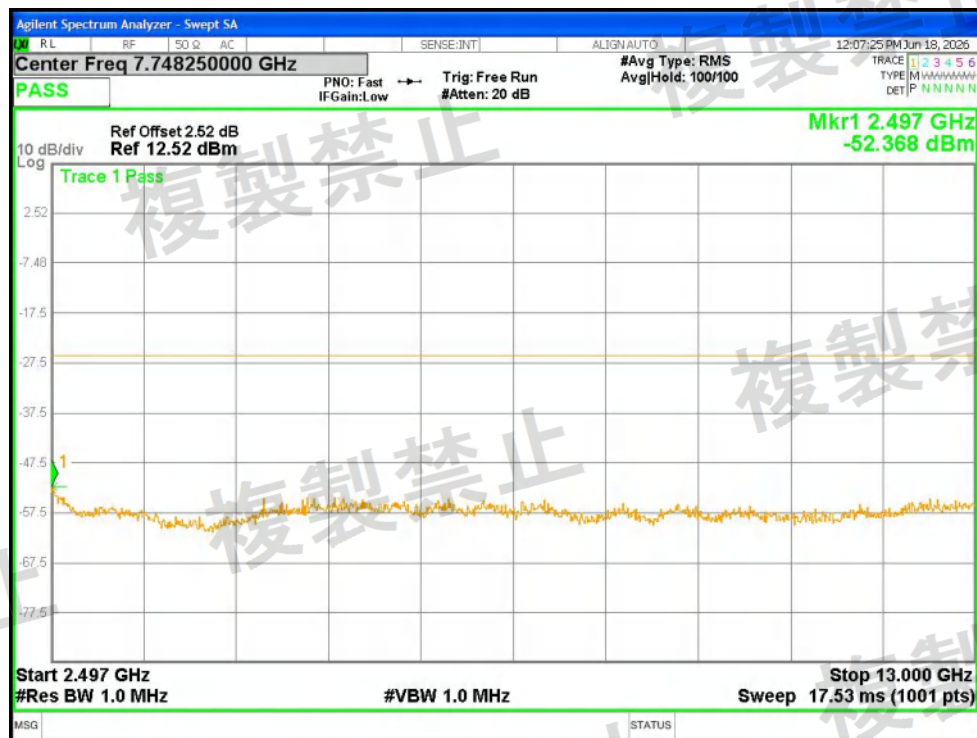


Tx. Spurious NVNT n20 2442MHz Ant1 @ 2496.5MHz-13000MHz

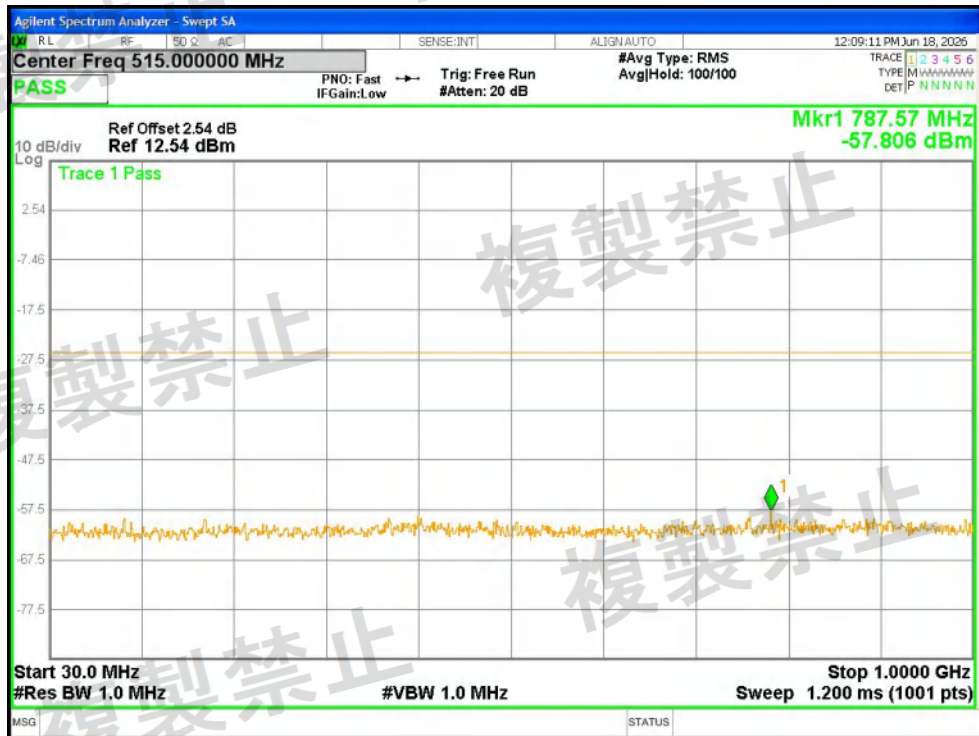


Tx. Spurious NVNT n20 2472MHz Ant1 @ 30MHz-1000MHz

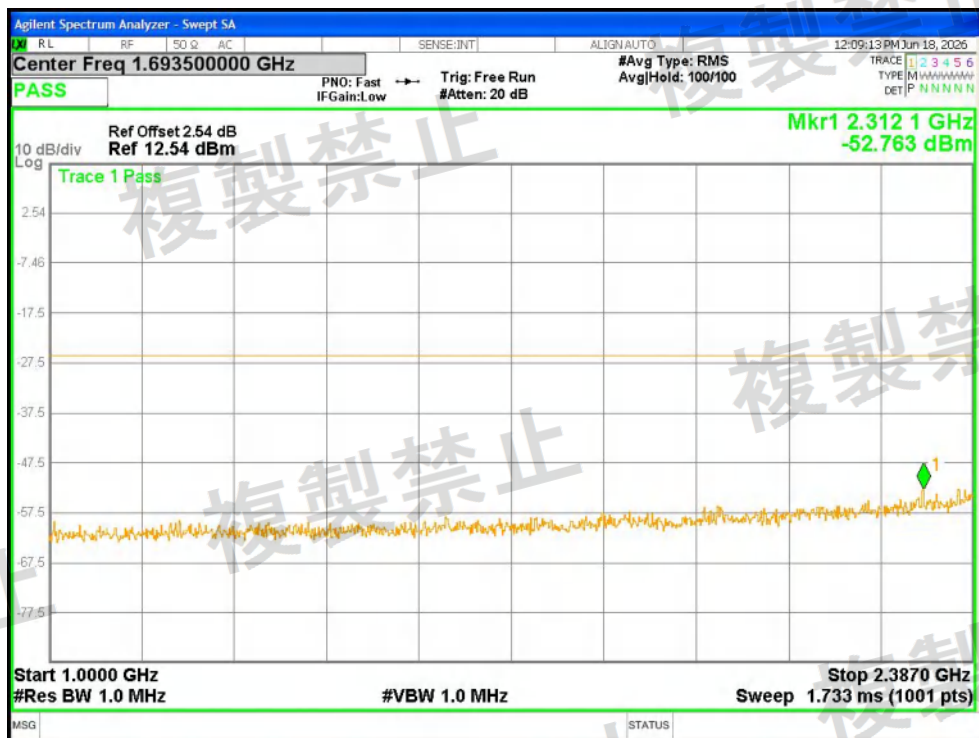


Tx. Spurious NVNT n20 2472MHz Ant1 @ 1000MHz-2387MHz

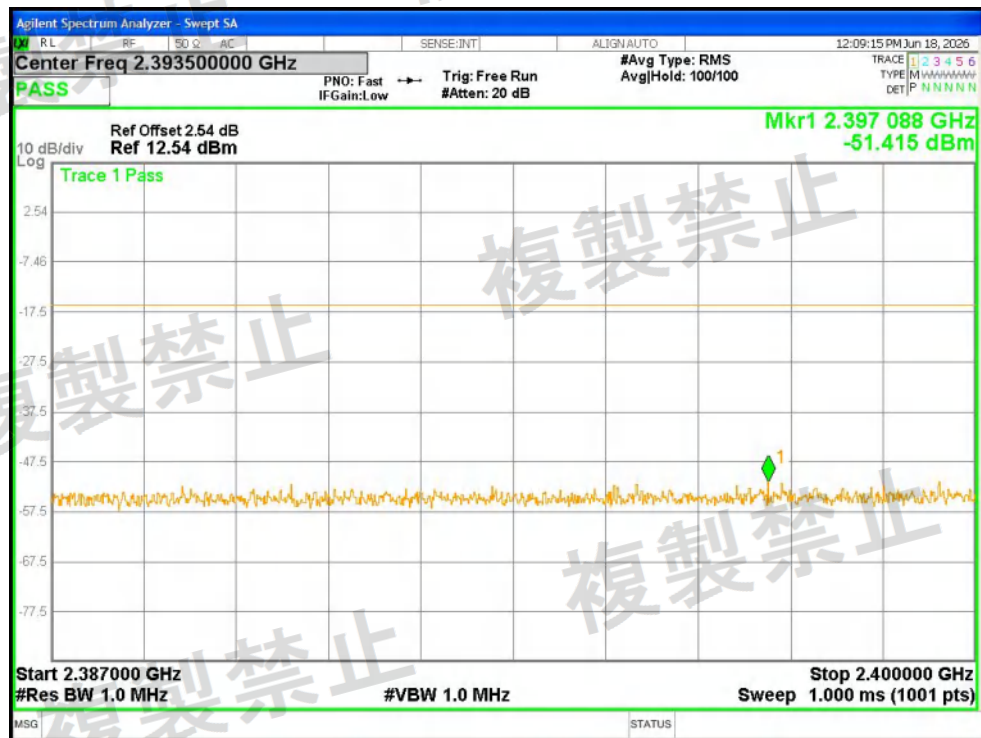


Tx. Spurious NVNT n20 2472MHz Ant1 @ 2387MHz-2400MHz

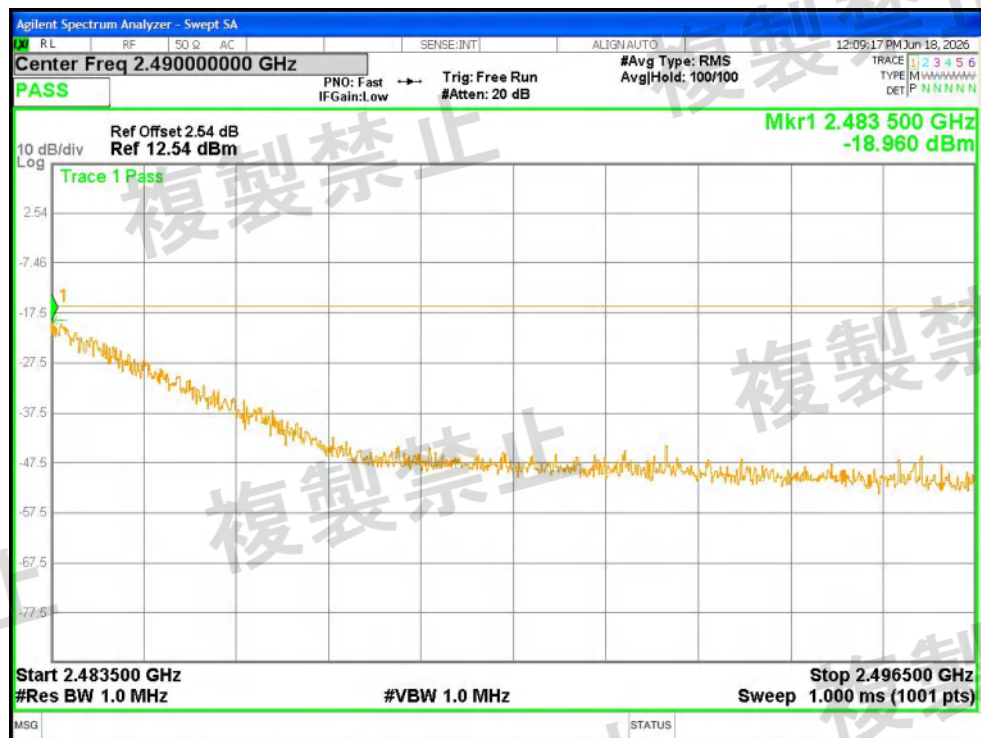


Tx. Spurious NVNT n20 2472MHz Ant1 @ 2483.5MHz-2496.5MHz

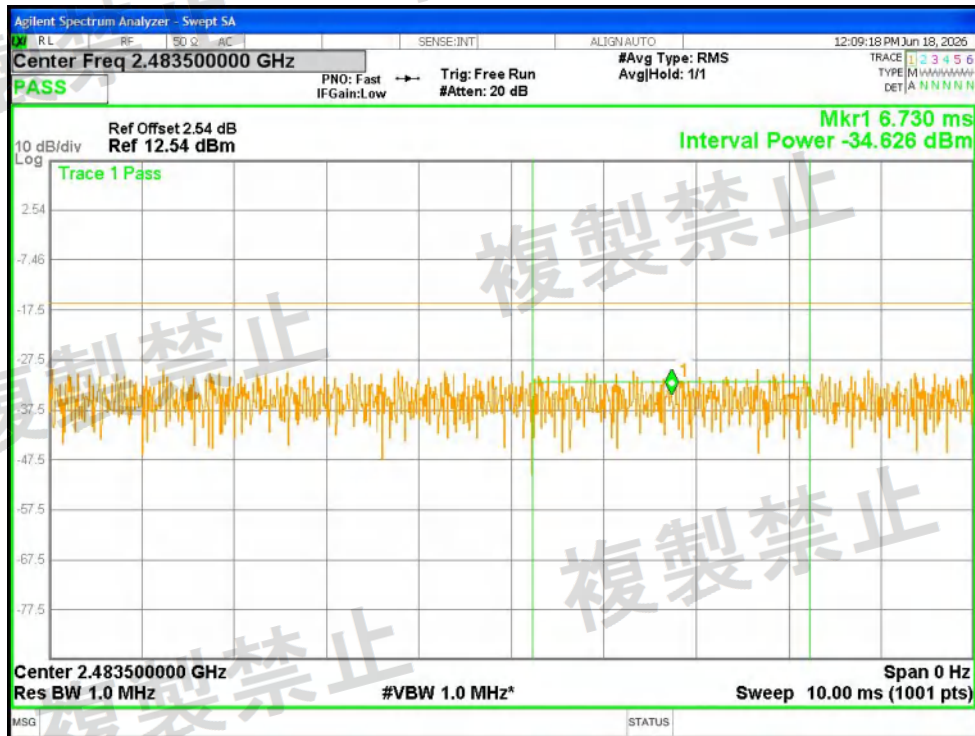


Tx. Spurious NVNT n20 2472MHz Ant1 @ 2483.5MHz-2496.5MHz Final

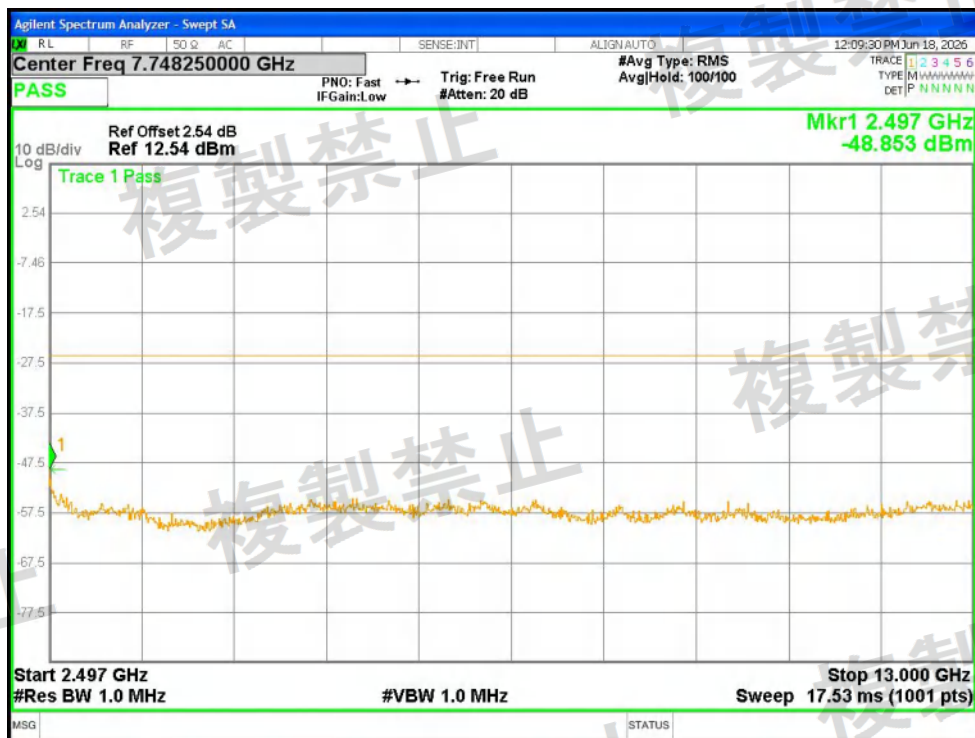


Tx. Spurious NVNT n20 2472MHz Ant1 @ 2496.5MHz-13000MHz

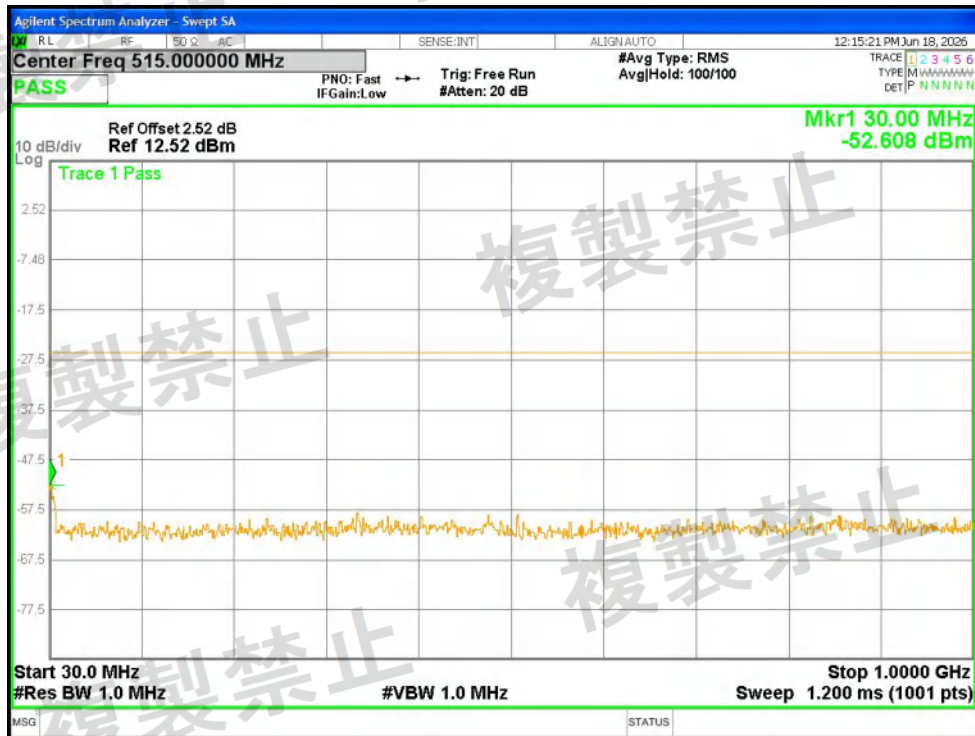


Tx. Spurious NVNT n40 2422MHz Ant1 @ 30MHz-1000MHz

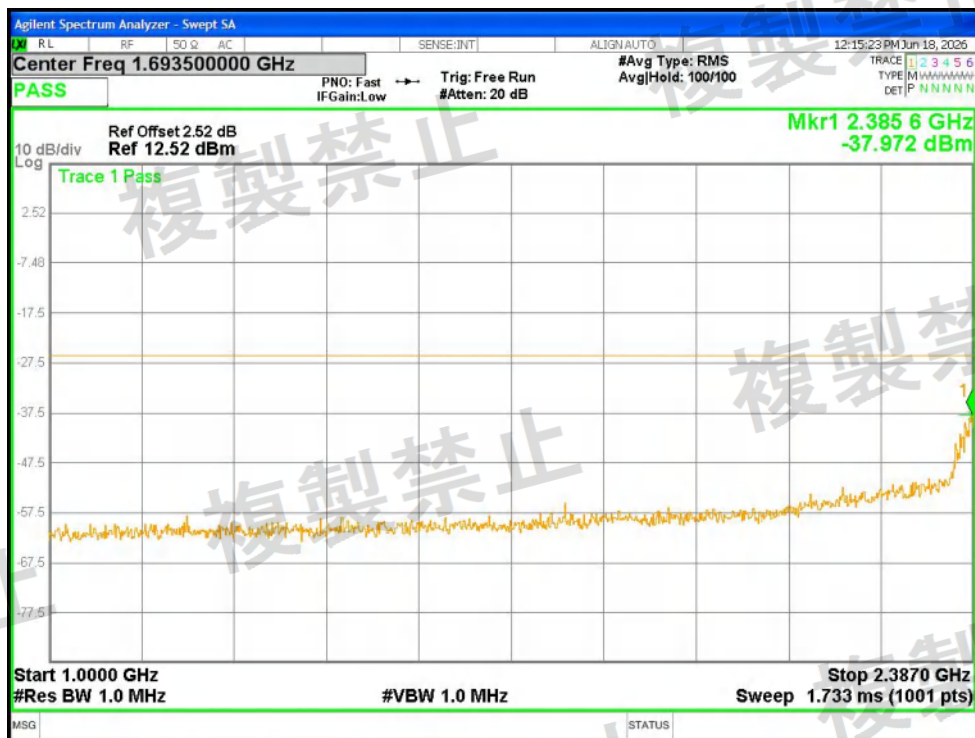


Tx. Spurious NVNT n40 2422MHz Ant1 @ 1000MHz-2387MHz

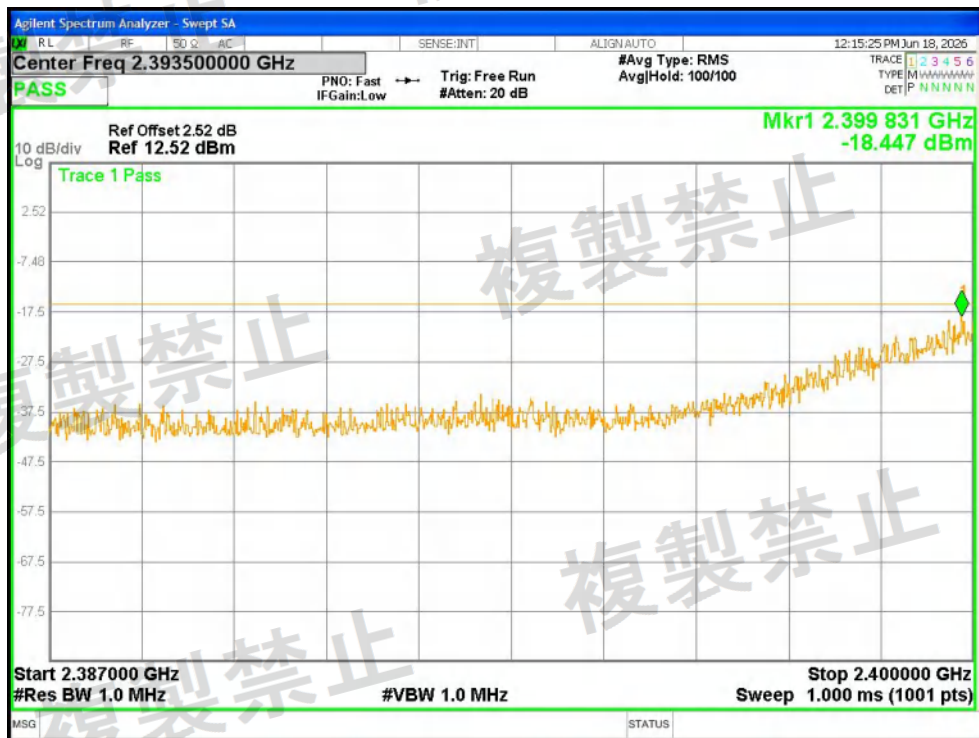


Tx. Spurious NVNT n40 2422MHz Ant1 @ 2387MHz-2400MHz

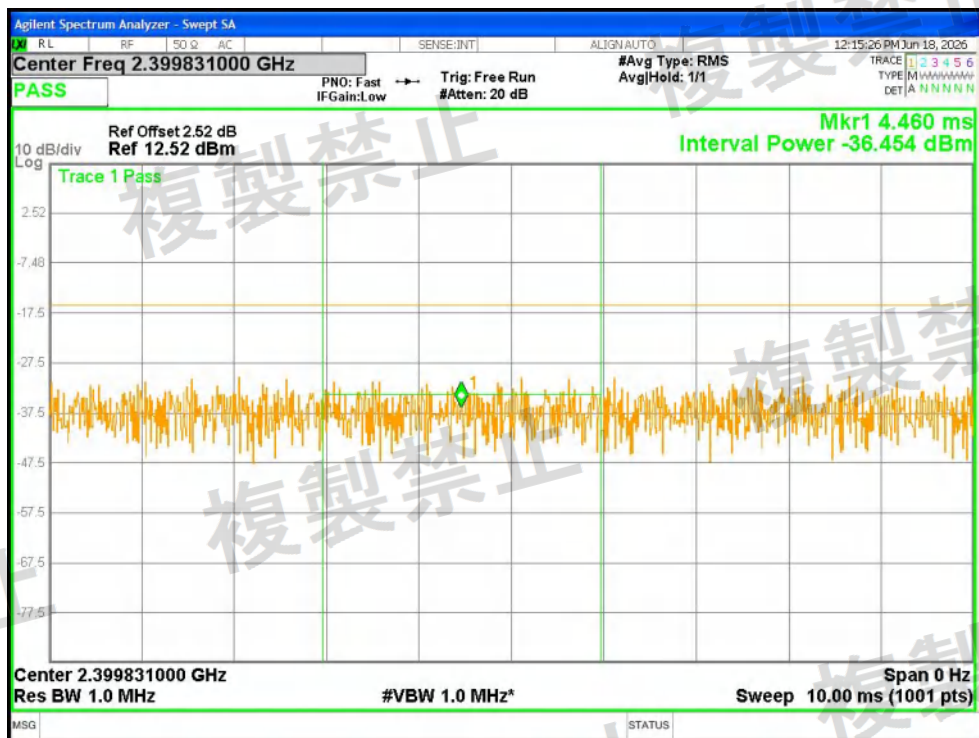


Tx. Spurious NVNT n40 2422MHz Ant1 @ 2387MHz-2400MHz Final

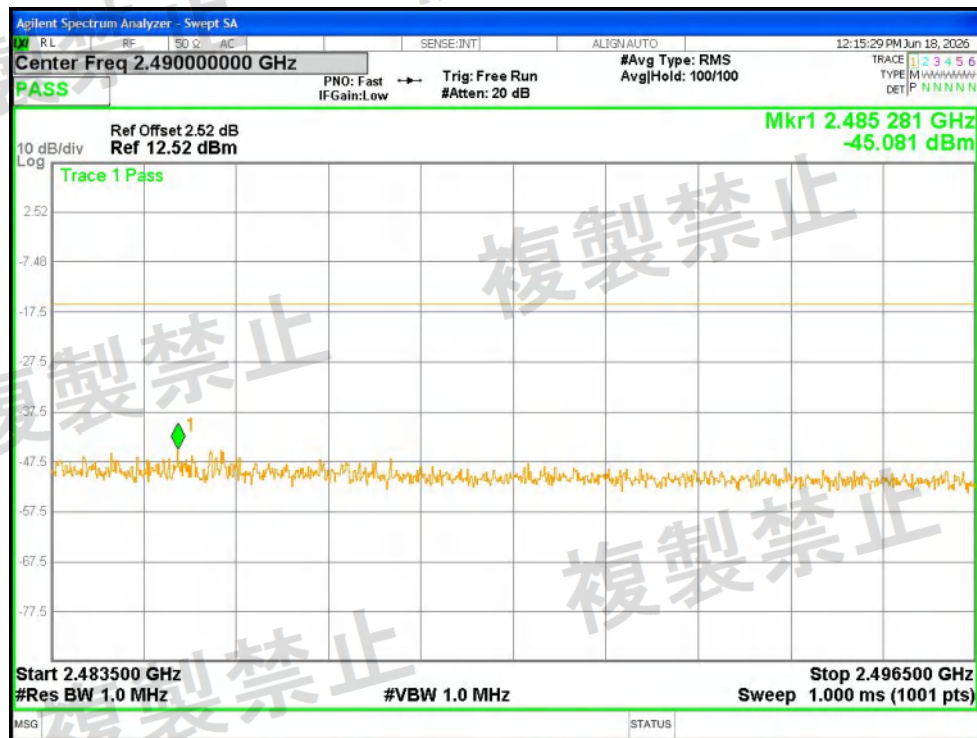


Tx. Spurious NVNT n40 2422MHz Ant1 @ 2483.5MHz-2496.5MHz

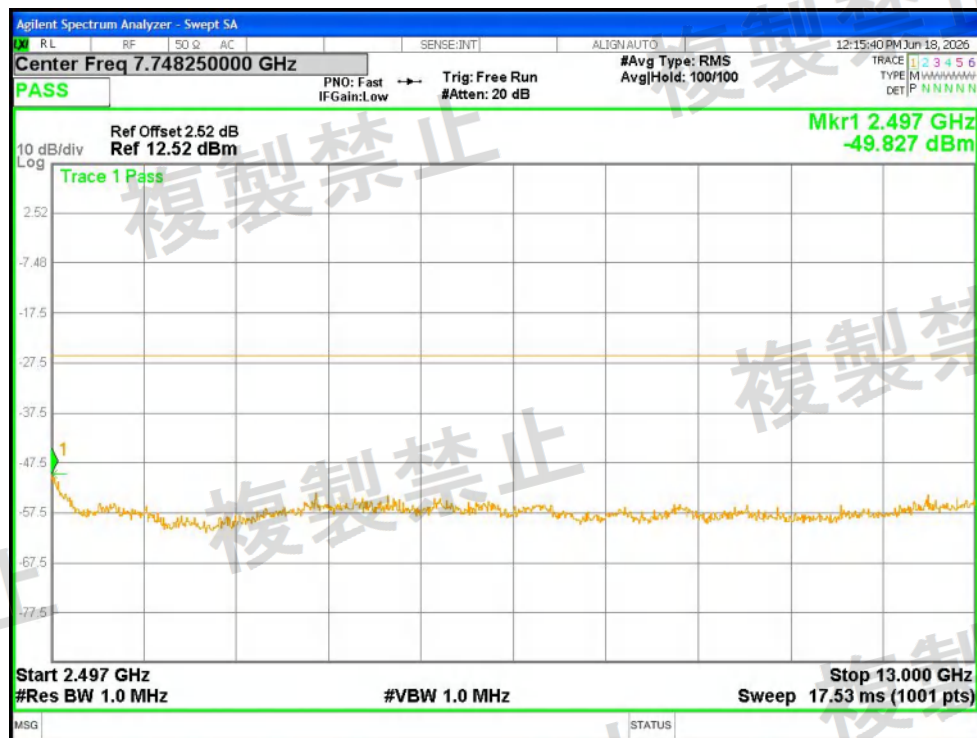


Tx. Spurious NVNT n40 2422MHz Ant1 @ 2496.5MHz-13000MHz

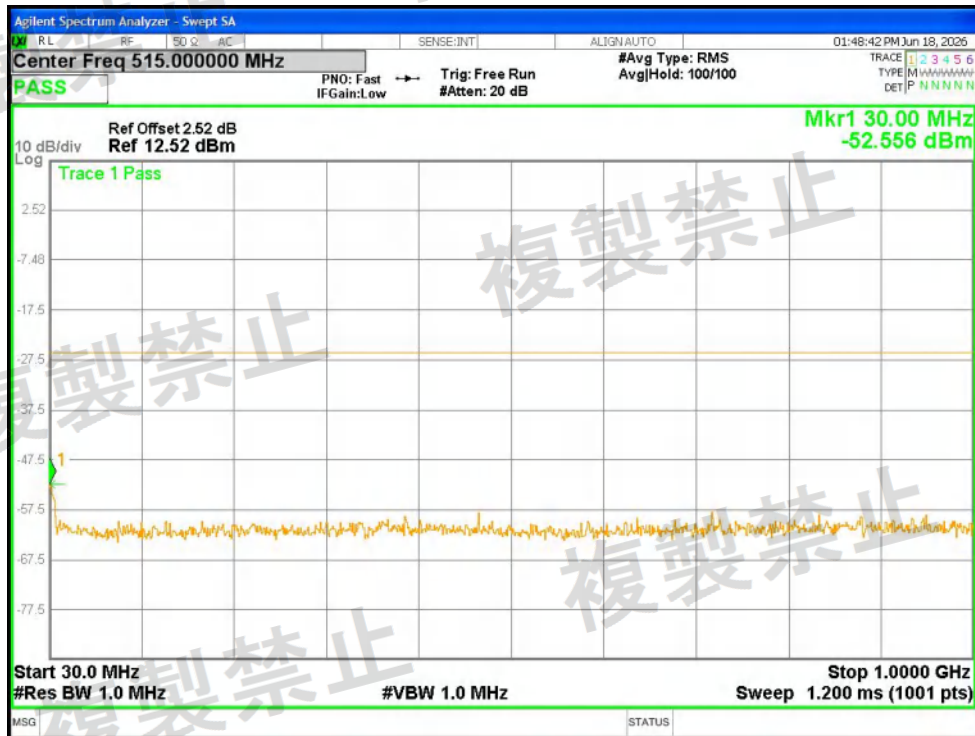


Tx. Spurious NVNT n40 2442MHz Ant1 @ 30MHz-1000MHz

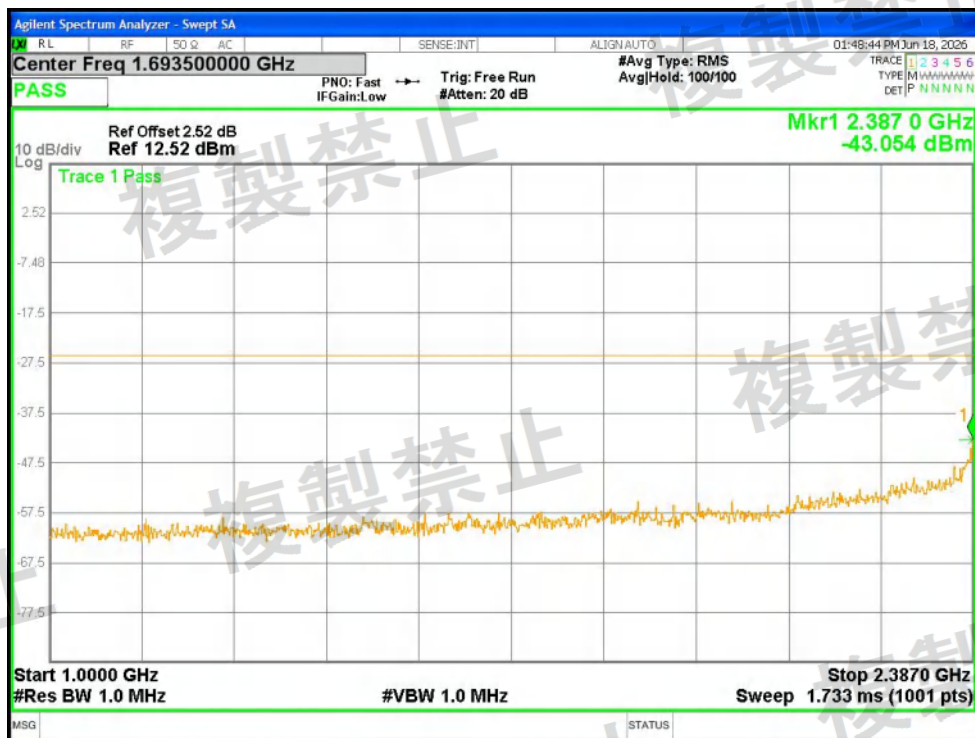


Tx. Spurious NVNT n40 2442MHz Ant1 @ 1000MHz-2387MHz

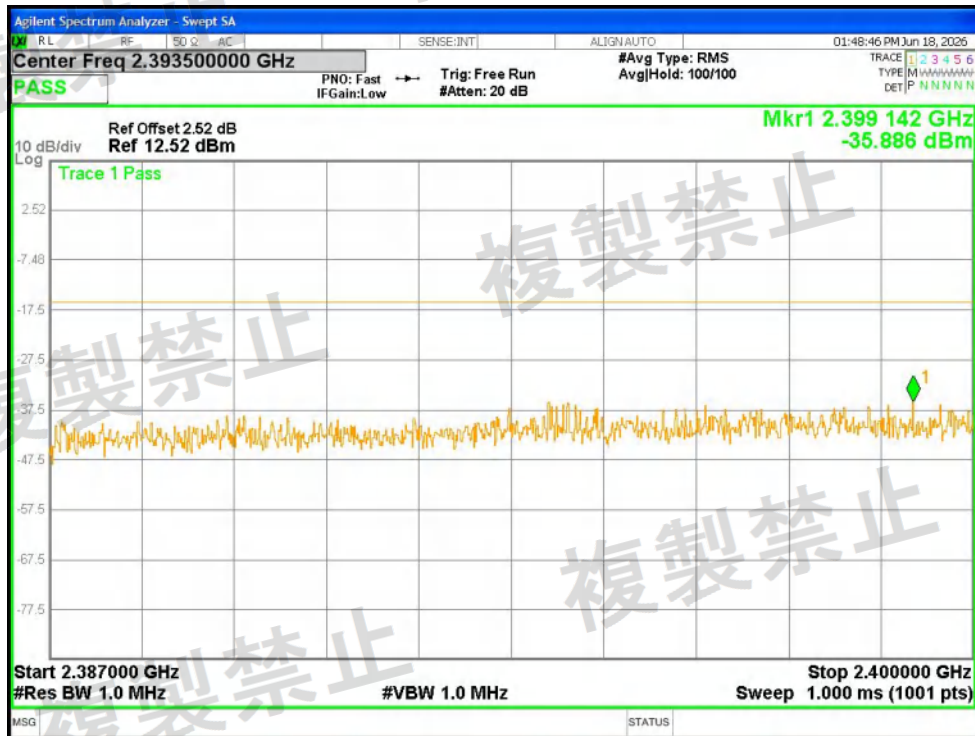


Tx. Spurious NVNT n40 2442MHz Ant1 @ 2387MHz-2400MHz

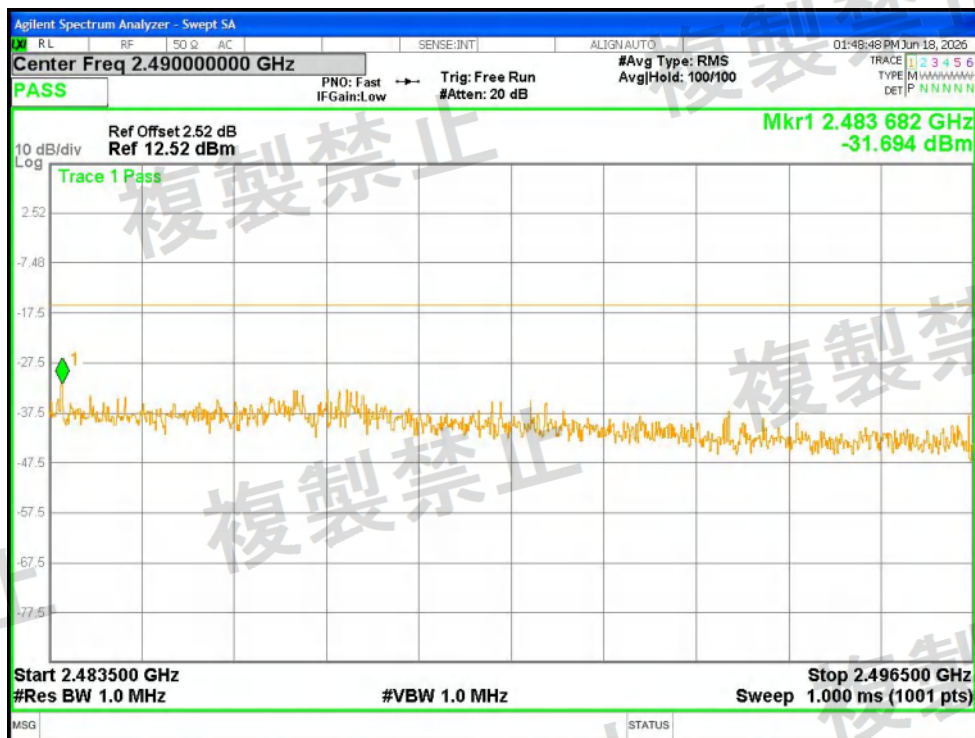


Tx. Spurious NVNT n40 2442MHz Ant1 @ 2483.5MHz-2496.5MHz

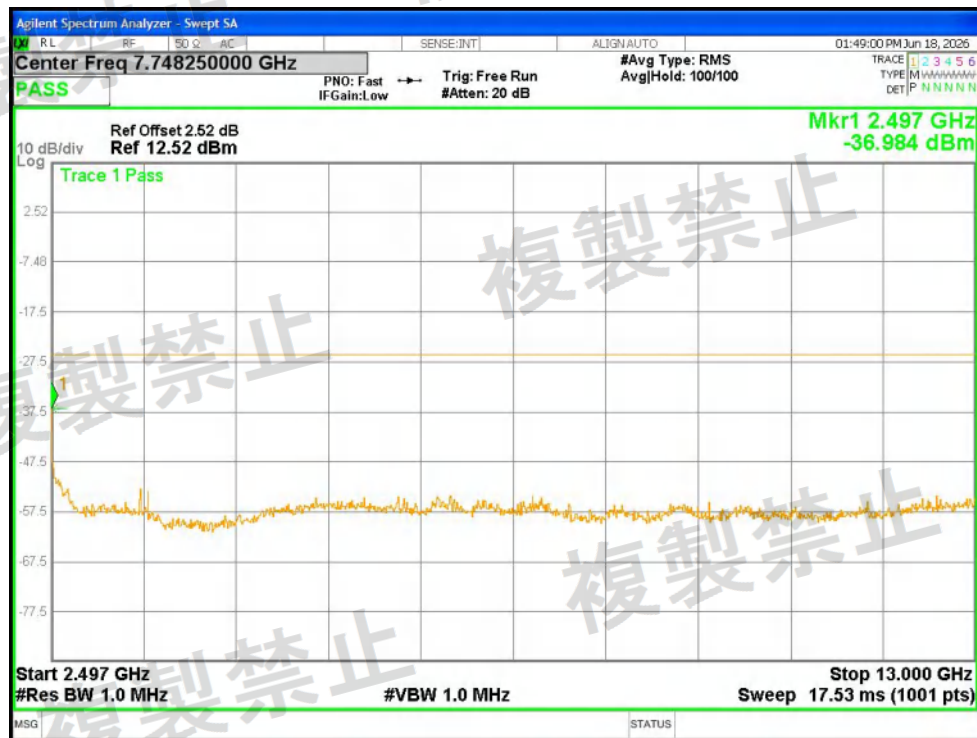


Tx. Spurious NVNT n40 2442MHz Ant1 @ 2496.5MHz-13000MHz

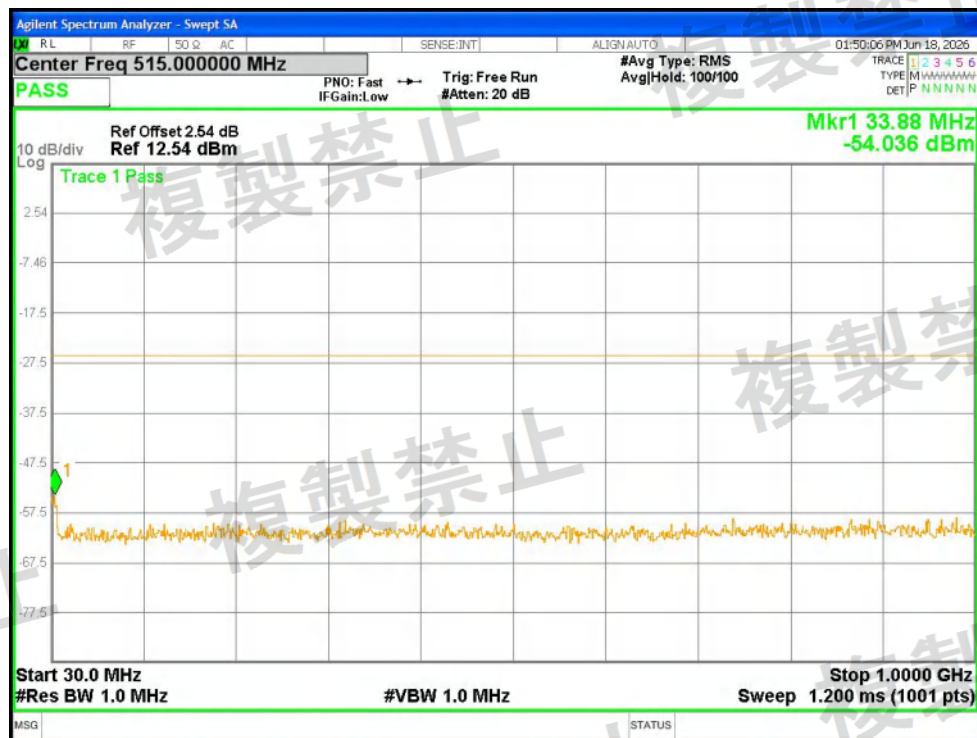


Tx. Spurious NVNT n40 2462MHz Ant1 @ 30MHz-1000MHz

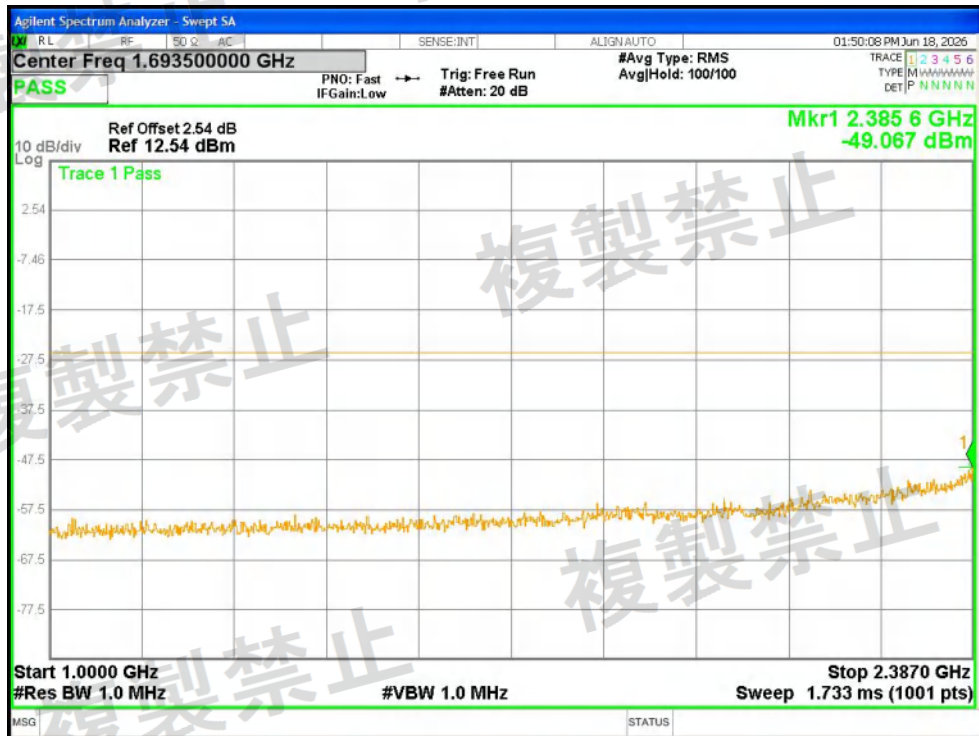


Tx. Spurious NVNT n40 2462MHz Ant1 @ 1000MHz-2387MHz

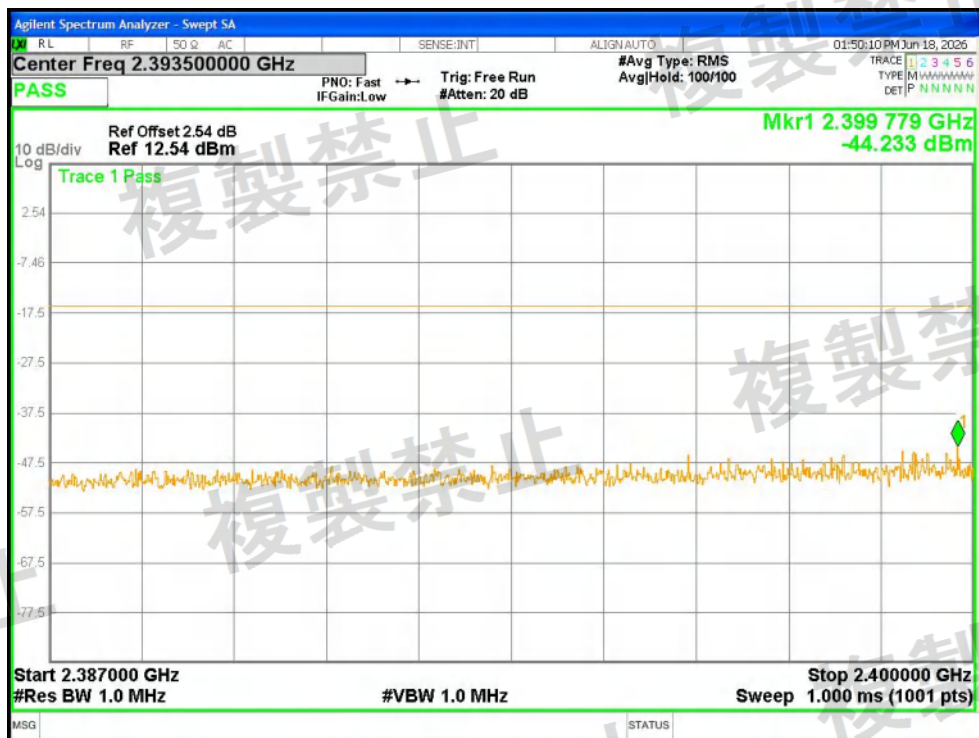


Tx. Spurious NVNT n40 2462MHz Ant1 @ 2387MHz-2400MHz

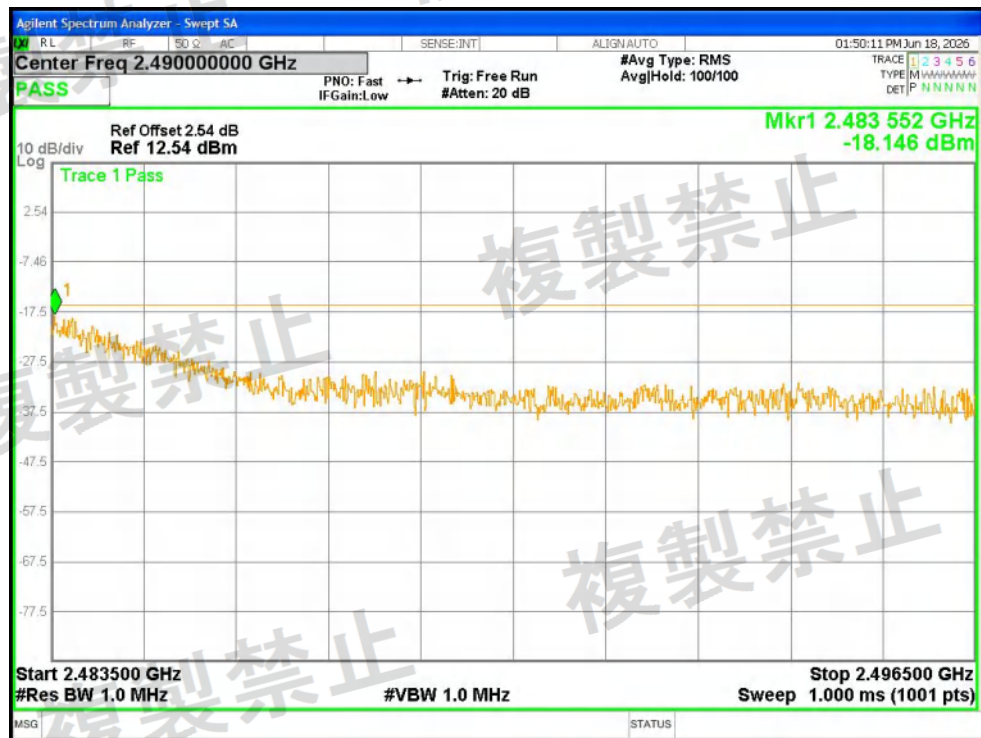

Tx. Spurious NVNT n40 2462MHz Ant1 @ 2483.5MHz-2496.5MHz

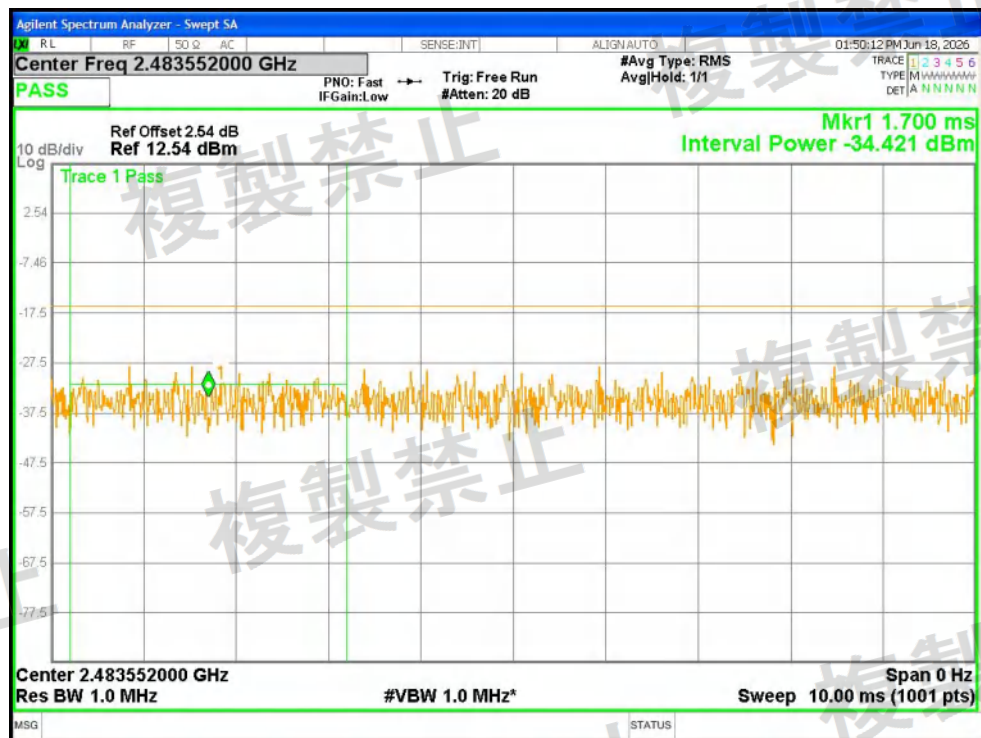


Tx. Spurious NVNT n40 2462MHz Ant1 @ 2483.5MHz-2496.5MHz Final

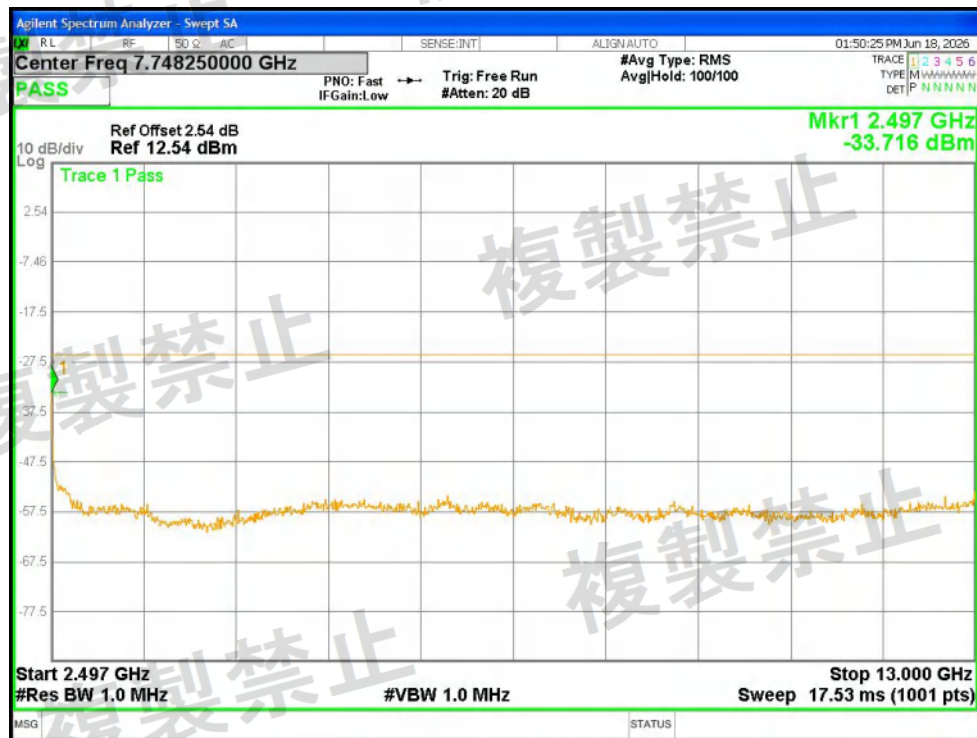


Tx. Spurious NVNT n40 2462MHz Ant1 @ 2496.5MHz-13000MHz

7. Rx Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Range (MHz)	Emission Frequency (MHz)	Max Peak Value (dBm)	Max RMS Value (dBm)	Max Peak Value (nW)	Max RMS Value (nW)	Limit (nW)	Verdict
NVNT	b	2412	Ant1	30-1000	861.29	-89.00	NA	0.0013	NA	4	Pass
NVNT	b	2412	Ant1	1000-13000	12592.00	-74.82	NA	0.033	NA	20	Pass
NVNT	b	2442	Ant1	30-1000	863.23	-88.40	NA	0.0014	NA	4	Pass
NVNT	b	2442	Ant1	1000-13000	12580.00	-75.05	NA	0.0313	NA	20	Pass
NVNT	b	2472	Ant1	30-1000	769.14	-88.94	NA	0.0013	NA	4	Pass
NVNT	b	2472	Ant1	1000-13000	12700.00	-74.66	NA	0.0342	NA	20	Pass
NVNT	g	2412	Ant1	30-1000	907.85	-88.76	NA	0.0013	NA	4	Pass
NVNT	g	2412	Ant1	1000-13000	2428.00	-74.71	NA	0.0338	NA	20	Pass
NVNT	g	2442	Ant1	30-1000	701.24	-88.99	NA	0.0013	NA	4	Pass
NVNT	g	2442	Ant1	1000-13000	5980.00	-74.71	NA	0.0338	NA	20	Pass
NVNT	g	2472	Ant1	30-1000	854.50	-88.74	NA	0.0013	NA	4	Pass
NVNT	g	2472	Ant1	1000-13000	5464.00	-74.25	NA	0.0376	NA	20	Pass
NVNT	n20	2412	Ant1	30-1000	703.18	-88.64	NA	0.0014	NA	4	Pass
NVNT	n20	2412	Ant1	1000-13000	6460.00	-74.81	NA	0.033	NA	20	Pass
NVNT	n20	2442	Ant1	30-1000	921.43	-88.80	NA	0.0013	NA	4	Pass
NVNT	n20	2442	Ant1	1000-13000	12796.00	-75.41	NA	0.0288	NA	20	Pass
NVNT	n20	2472	Ant1	30-1000	736.16	-88.86	NA	0.0013	NA	4	Pass
NVNT	n20	2472	Ant1	1000-13000	2428.00	-71.14	NA	0.0769	NA	20	Pass
NVNT	n40	2422	Ant1	30-1000	815.70	-88.93	NA	0.0013	NA	4	Pass
NVNT	n40	2422	Ant1	1000-13000	12904.00	-74.72	NA	0.0337	NA	20	Pass
NVNT	n40	2442	Ant1	30-1000	840.92	-88.87	NA	0.0013	NA	4	Pass
NVNT	n40	2442	Ant1	1000-13000	12784.00	-75.31	NA	0.0294	NA	20	Pass
NVNT	n40	2462	Ant1	30-1000	871.96	-88.67	NA	0.0014	NA	4	Pass
NVNT	n40	2462	Ant1	1000-13000	12532.00	-75.18	NA	0.0303	NA	20	Pass

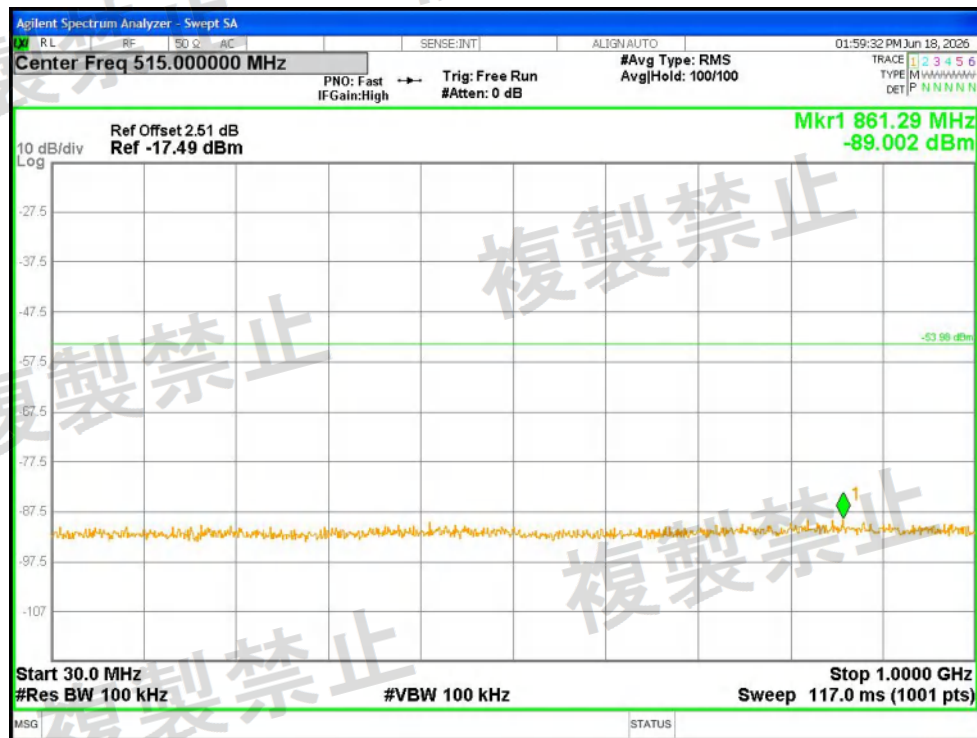


Rx. Spurious NVNT b 2412MHz Ant1 @ 30MHz-1000MHz

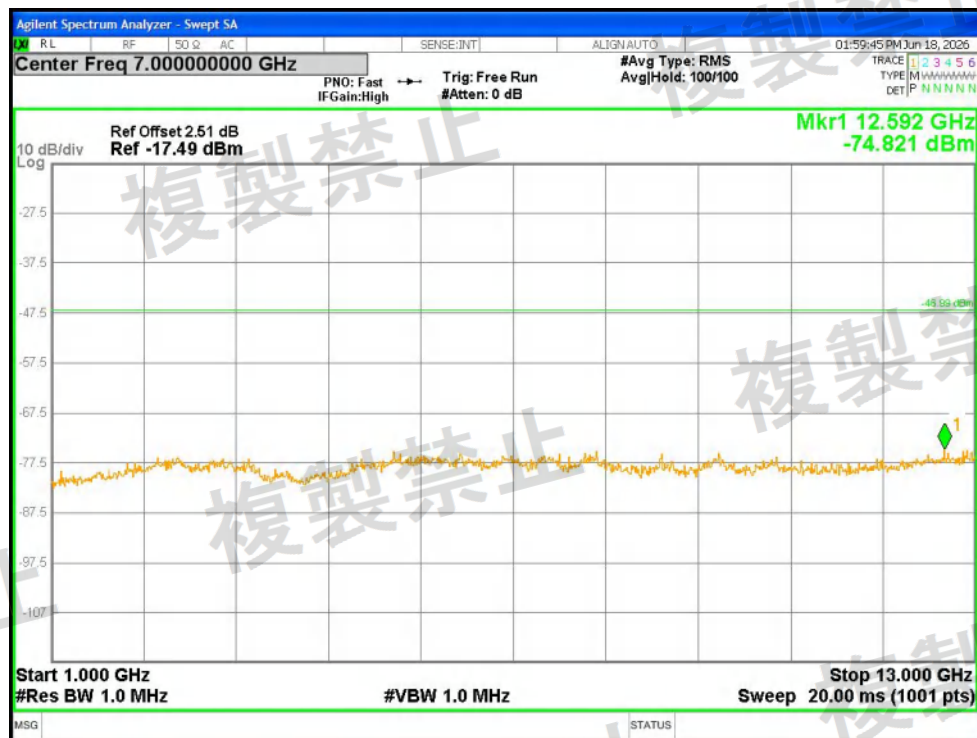


Rx. Spurious NVNT b 2412MHz Ant1 @ 1000MHz-13000MHz

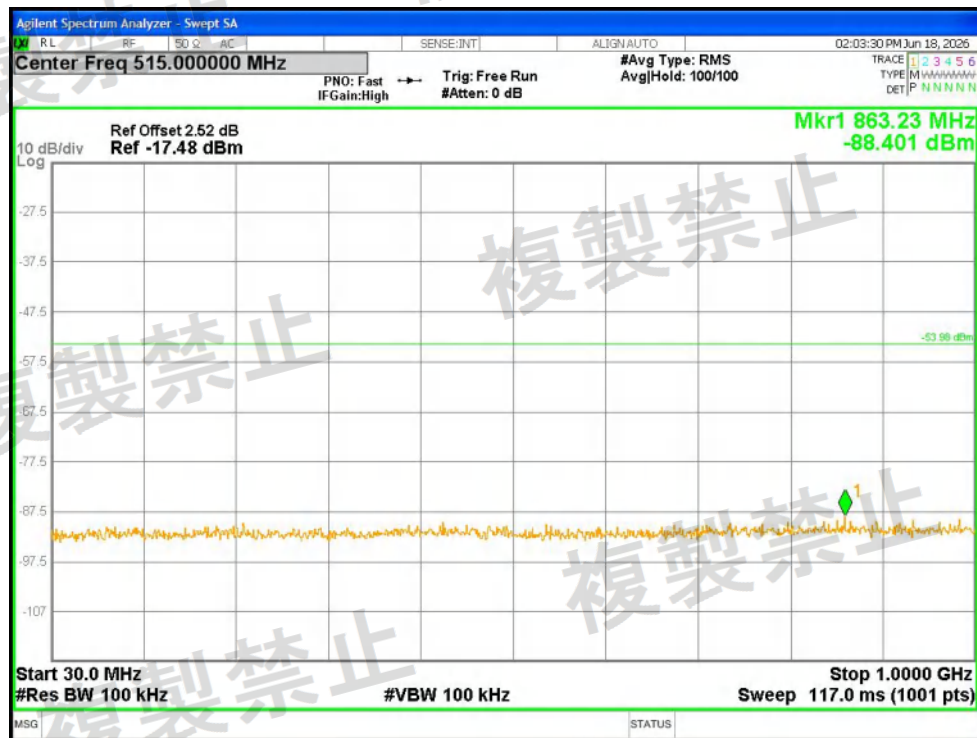


Rx. Spurious NVNT b 2442MHz Ant1 @ 30MHz-1000MHz

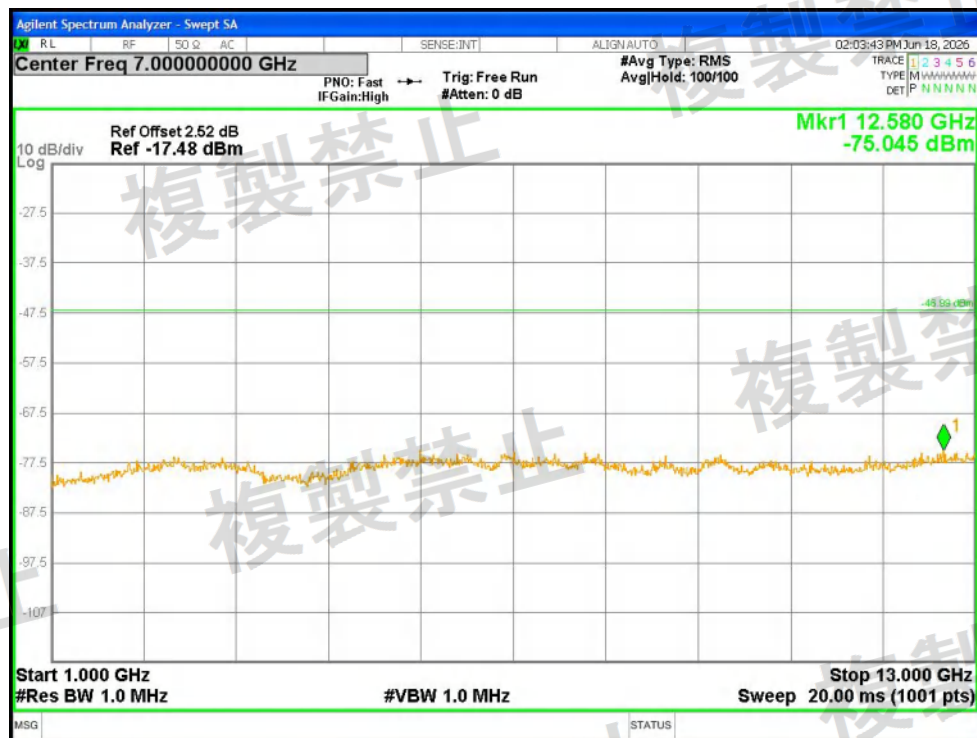


Rx. Spurious NVNT b 2442MHz Ant1 @ 1000MHz-13000MHz

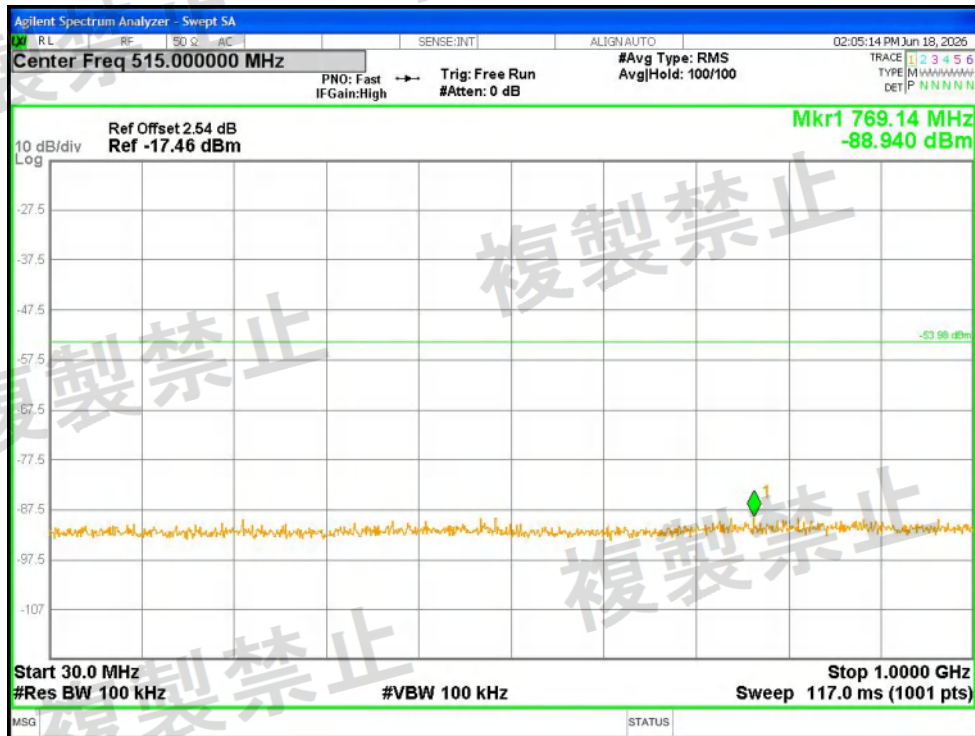


Rx. Spurious NVNT b 2472MHz Ant1 @ 30MHz-1000MHz

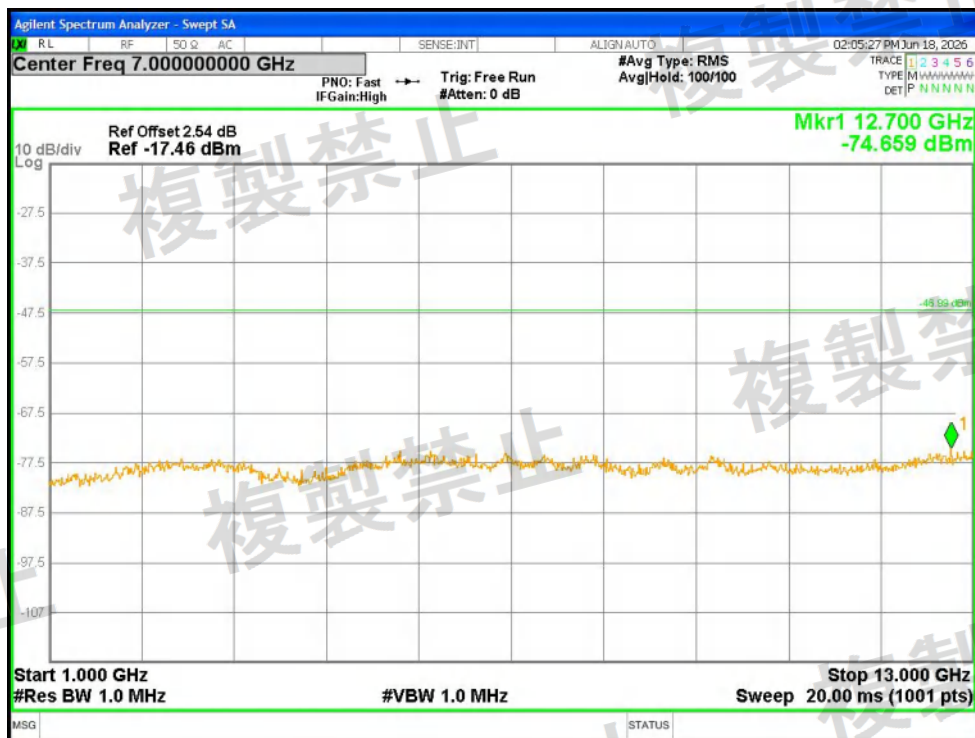


Rx. Spurious NVNT b 2472MHz Ant1 @ 1000MHz-13000MHz

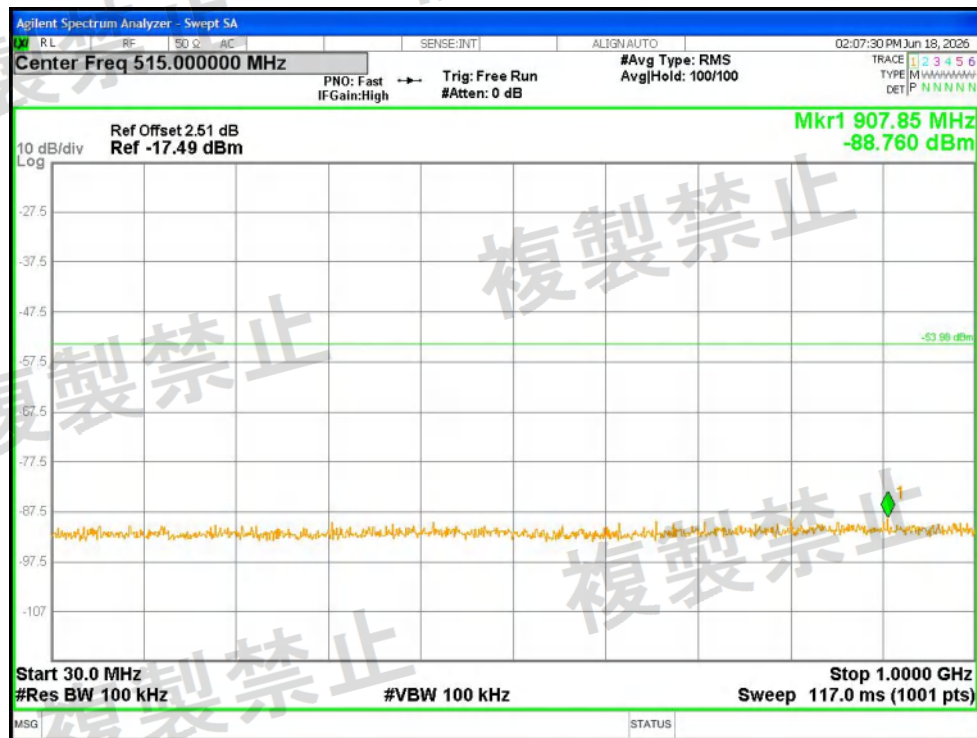


Rx. Spurious NVNT g 2412MHz Ant1 @ 30MHz-1000MHz

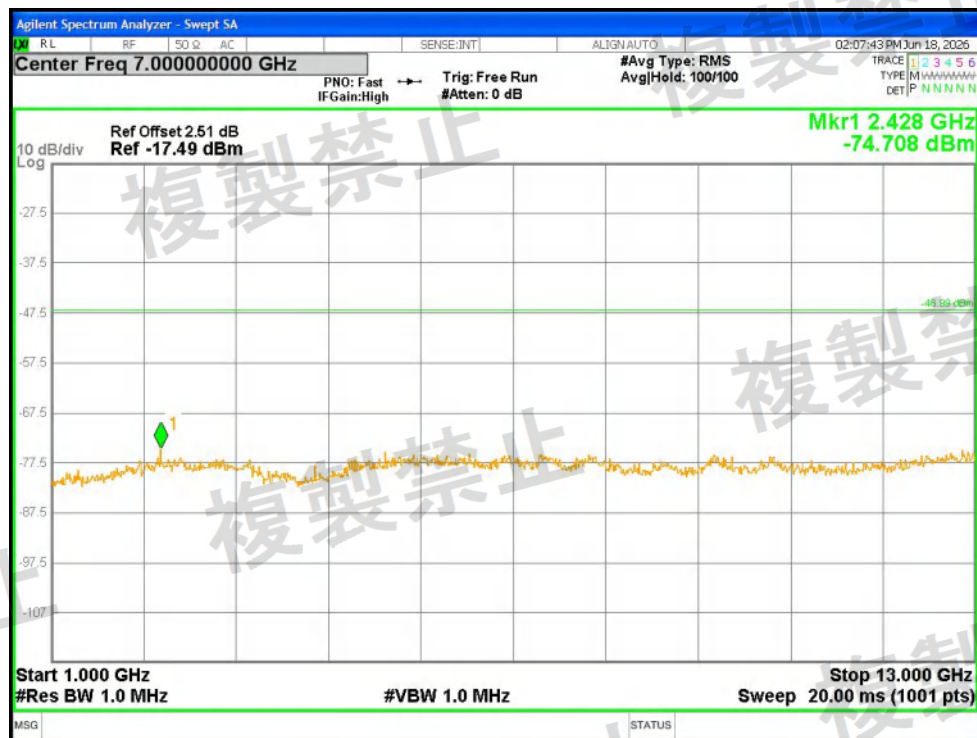


Rx. Spurious NVNT g 2412MHz Ant1 @ 1000MHz-13000MHz

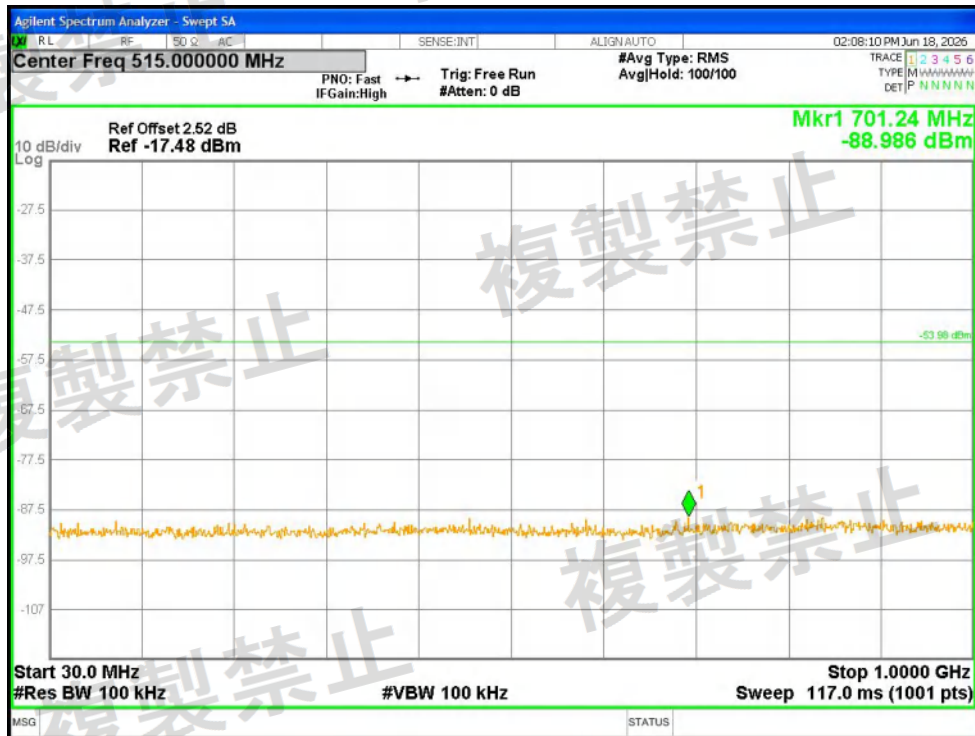


Rx. Spurious NVNT g 2442MHz Ant1 @ 30MHz-1000MHz

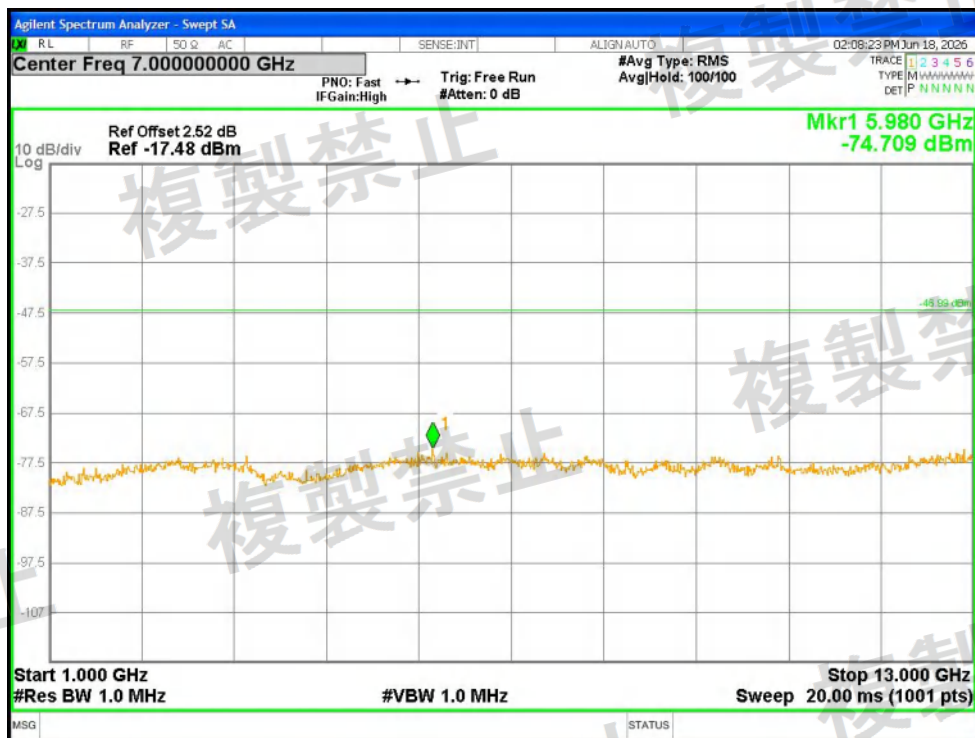


Rx. Spurious NVNT g 2442MHz Ant1 @ 1000MHz-13000MHz

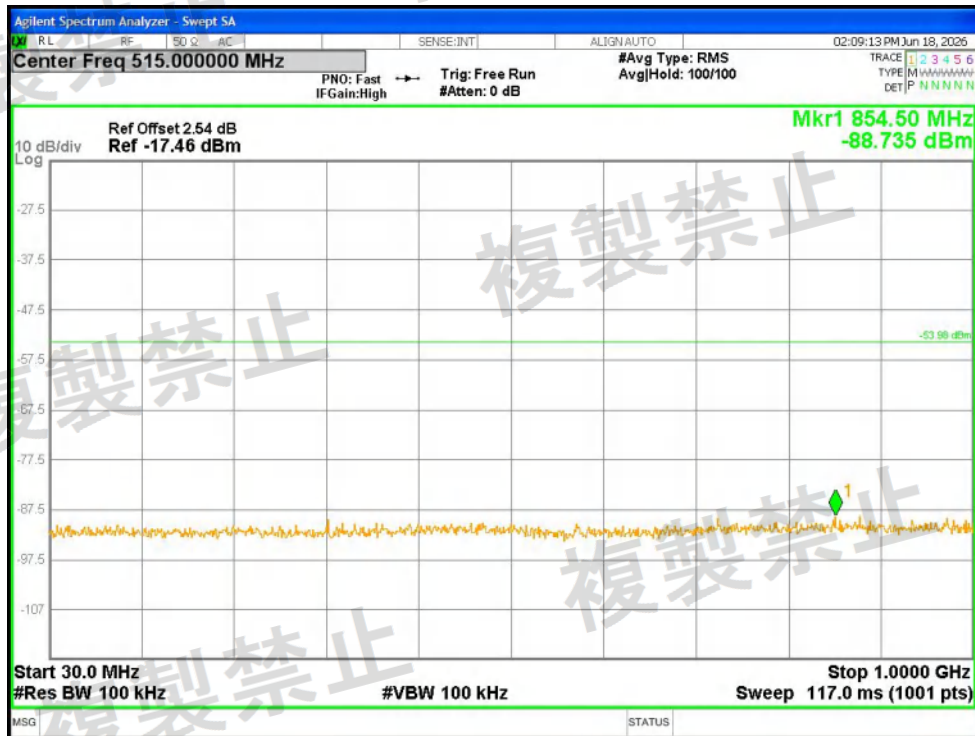


Rx. Spurious NVNT g 2472MHz Ant1 @ 30MHz-1000MHz

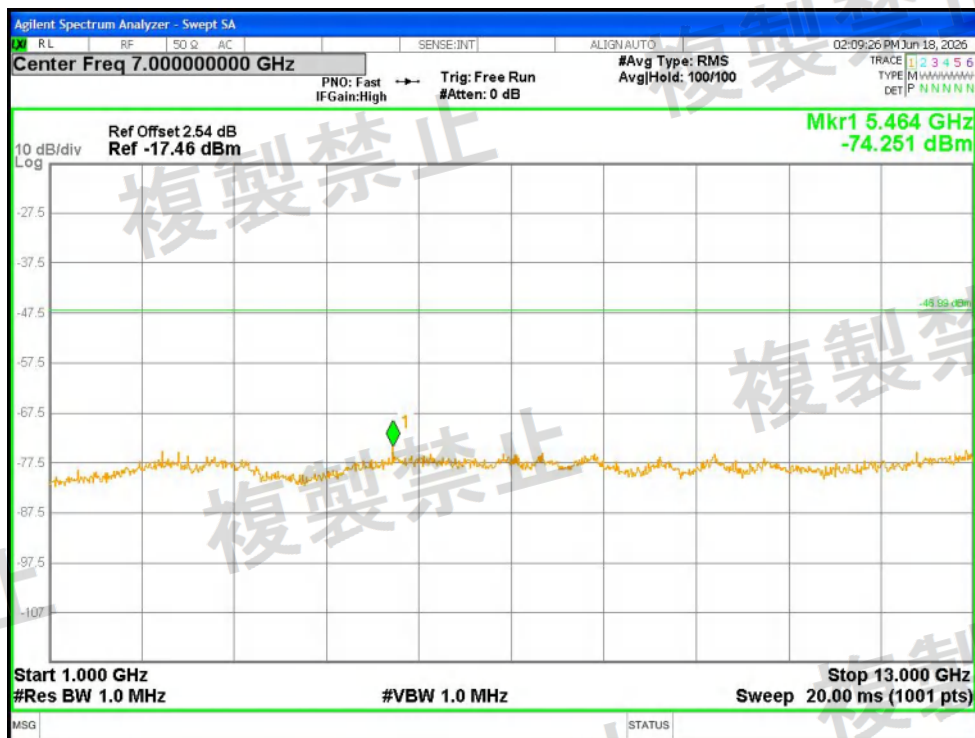


Rx. Spurious NVNT g 2472MHz Ant1 @ 1000MHz-13000MHz

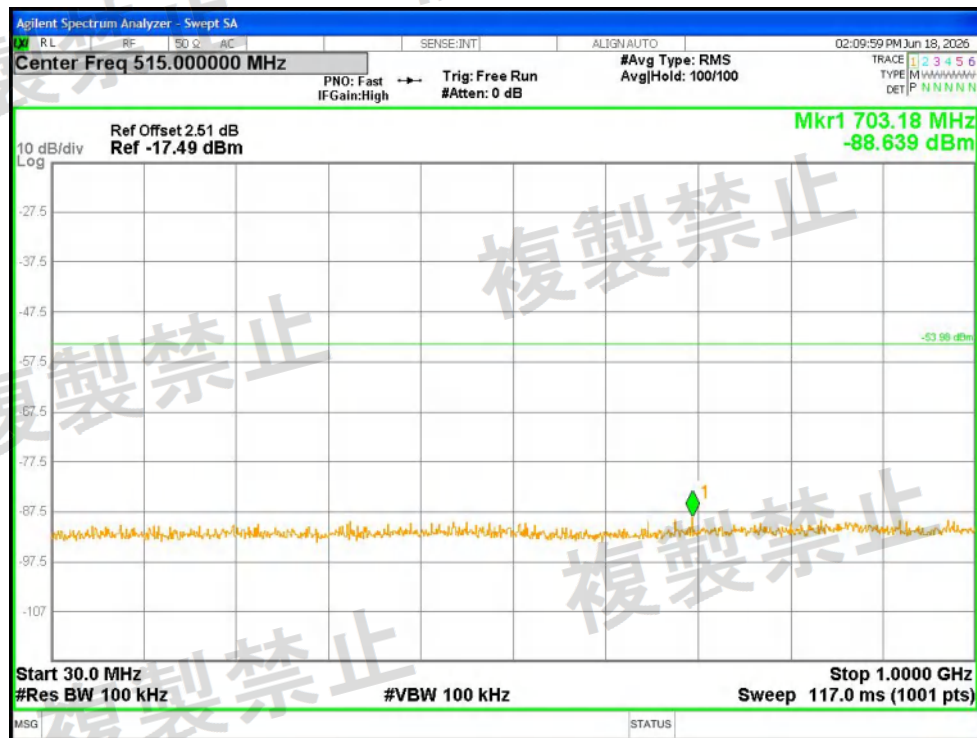


Rx. Spurious NVNT n20 2412MHz Ant1 @ 30MHz-1000MHz

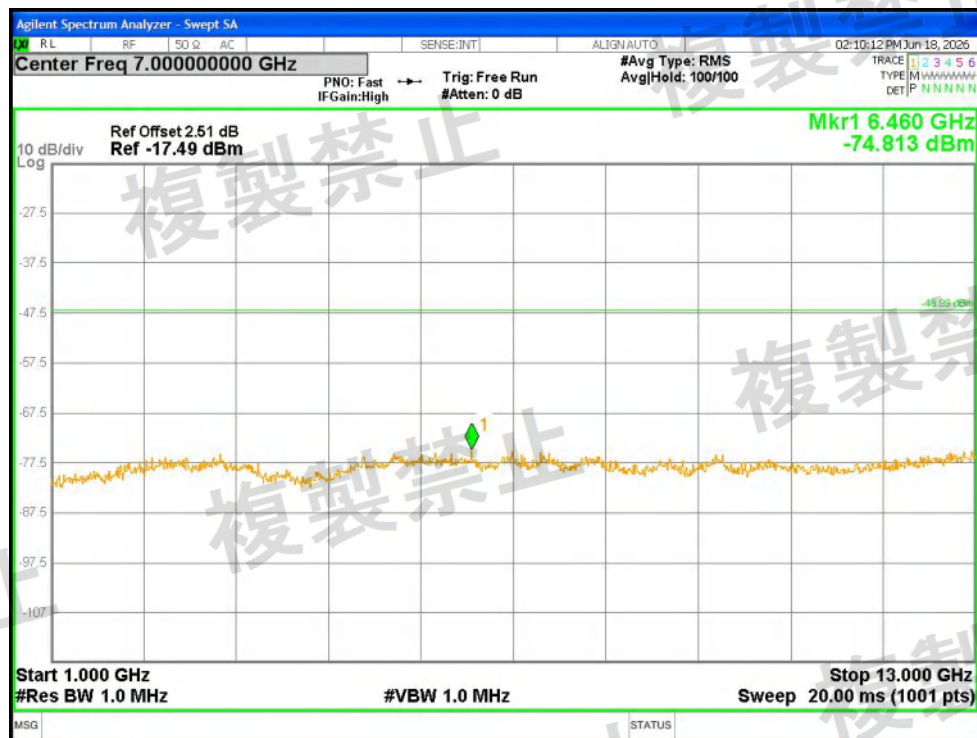


Rx. Spurious NVNT n20 2412MHz Ant1 @ 1000MHz-13000MHz

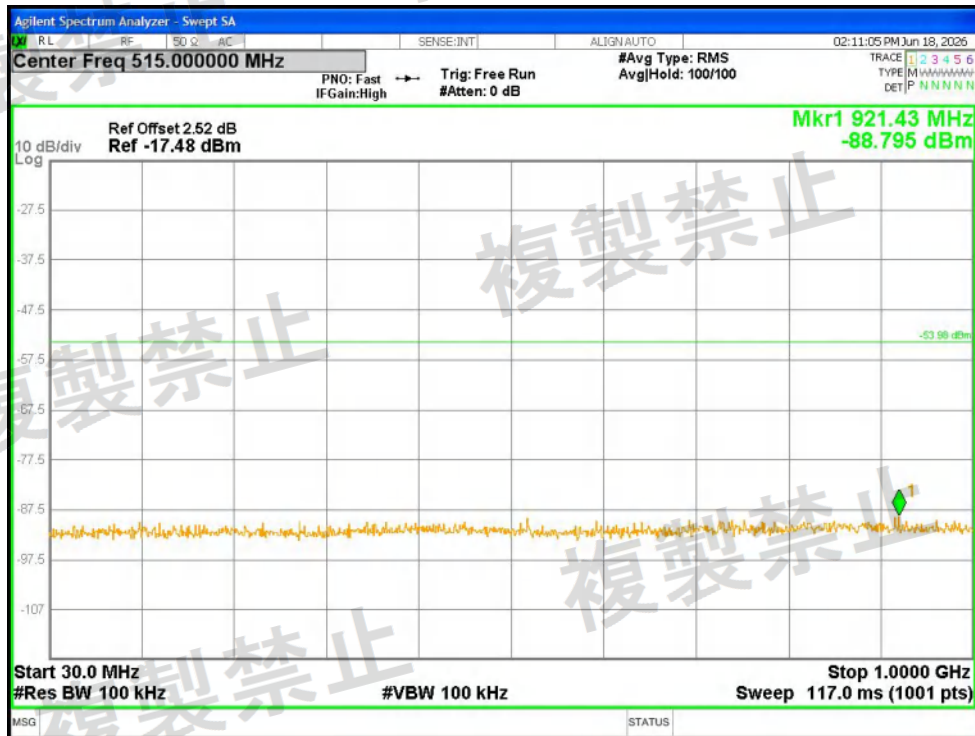


Rx. Spurious NVNT n20 2442MHz Ant1 @ 30MHz-1000MHz

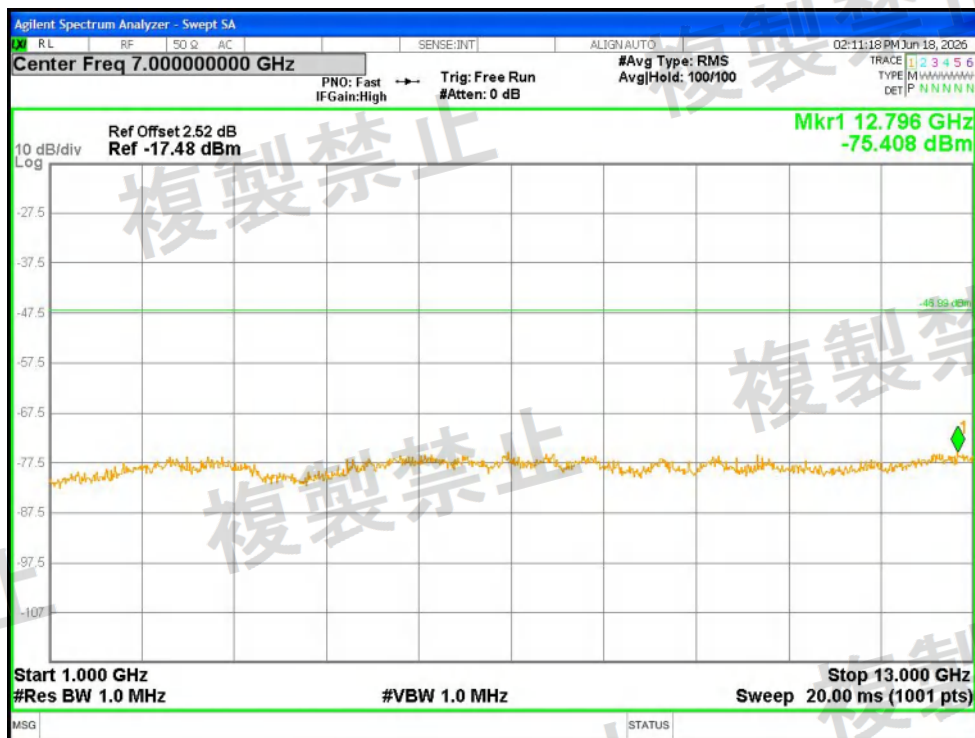


Rx. Spurious NVNT n20 2442MHz Ant1 @ 1000MHz-13000MHz

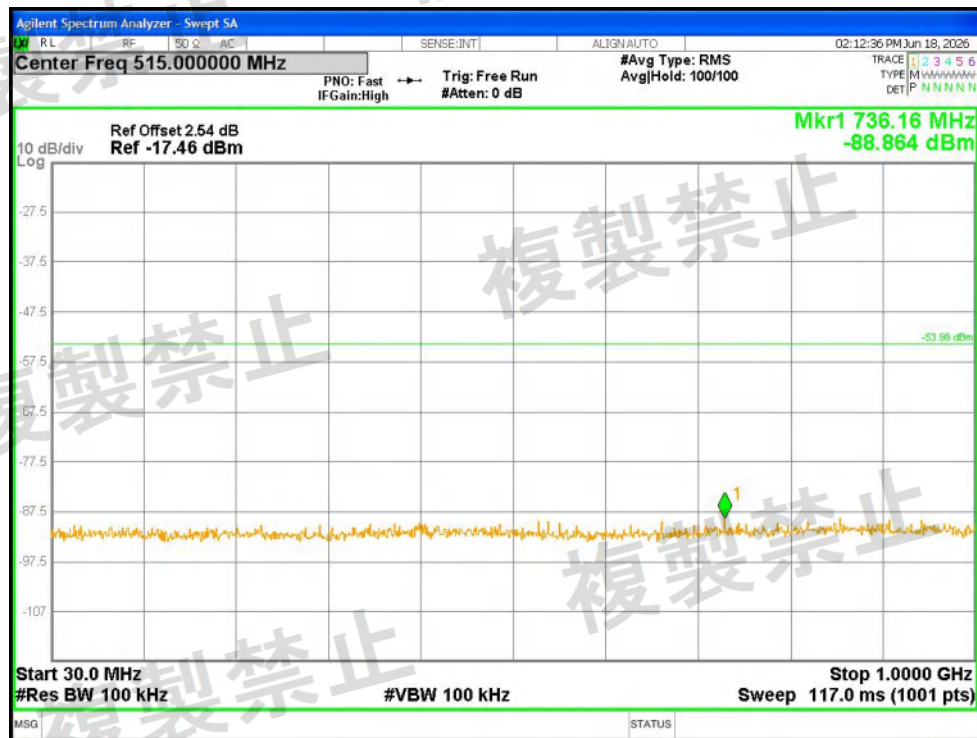


Rx. Spurious NVNT n20 2472MHz Ant1 @ 30MHz-1000MHz

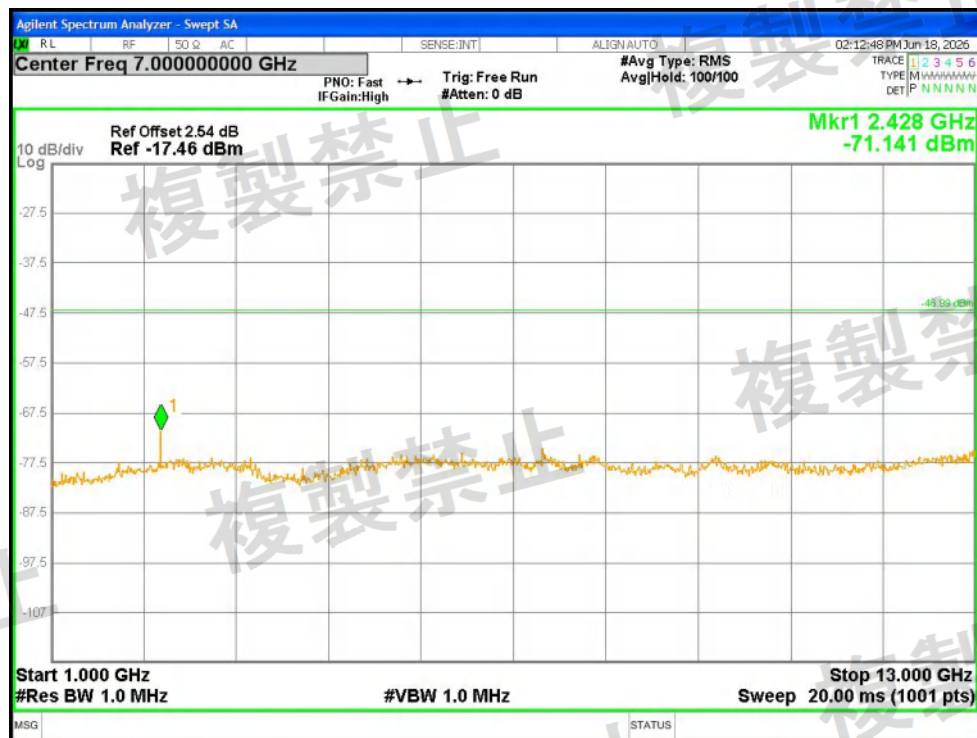


Rx. Spurious NVNT n20 2472MHz Ant1 @ 1000MHz-13000MHz

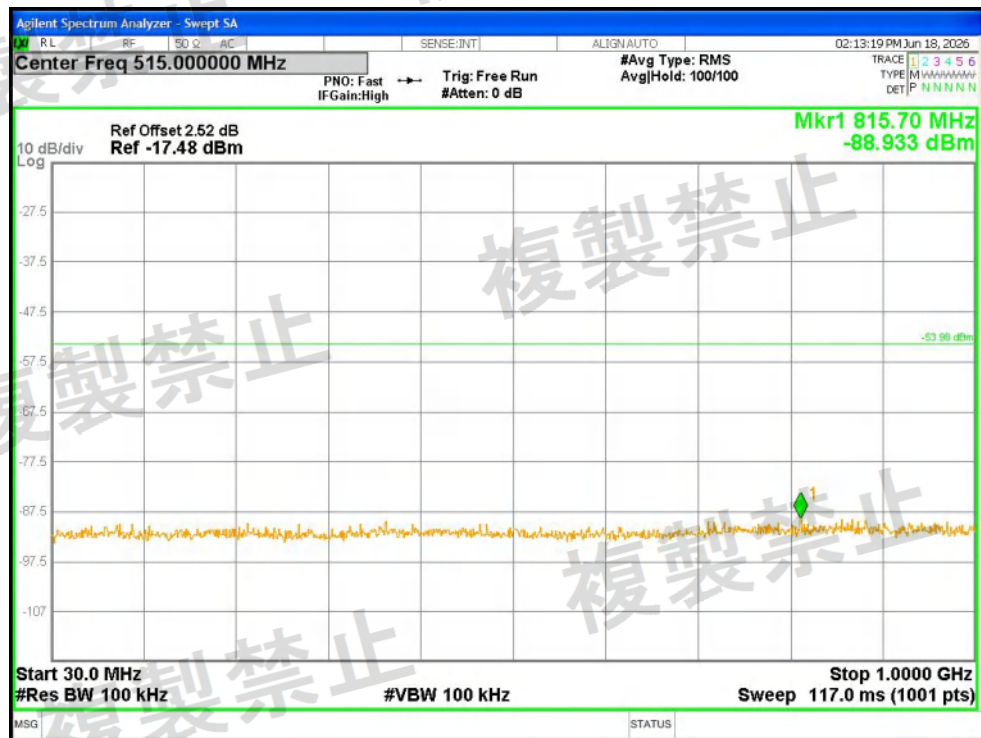


Rx. Spurious NVNT n40 2422MHz Ant1 @ 30MHz-1000MHz

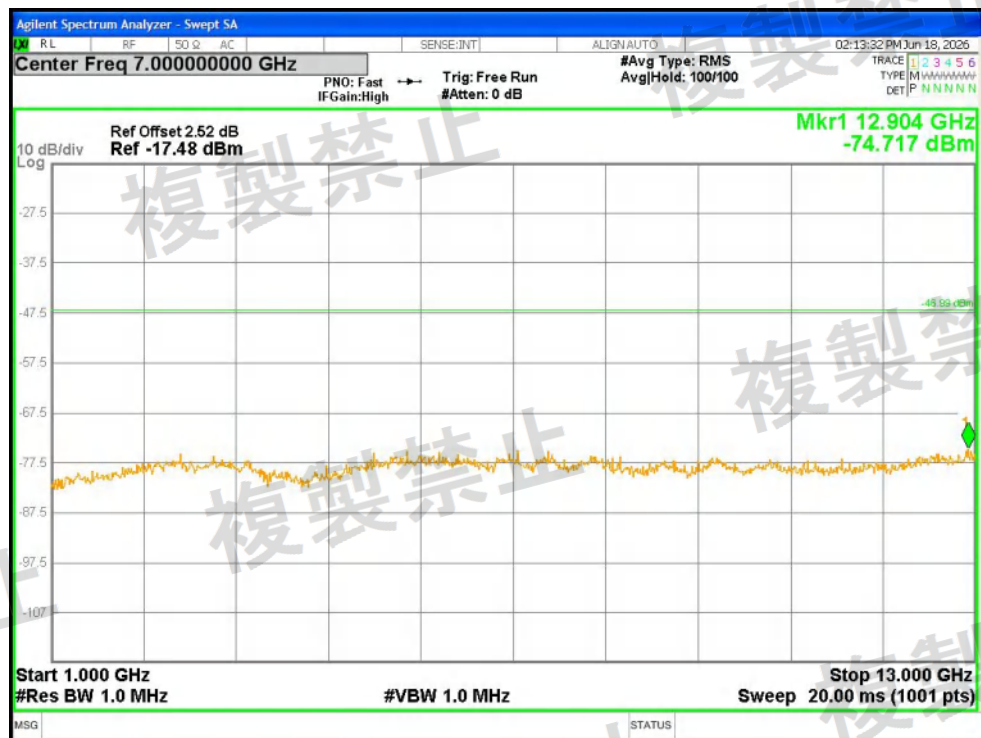


Rx. Spurious NVNT n40 2422MHz Ant1 @ 1000MHz-13000MHz

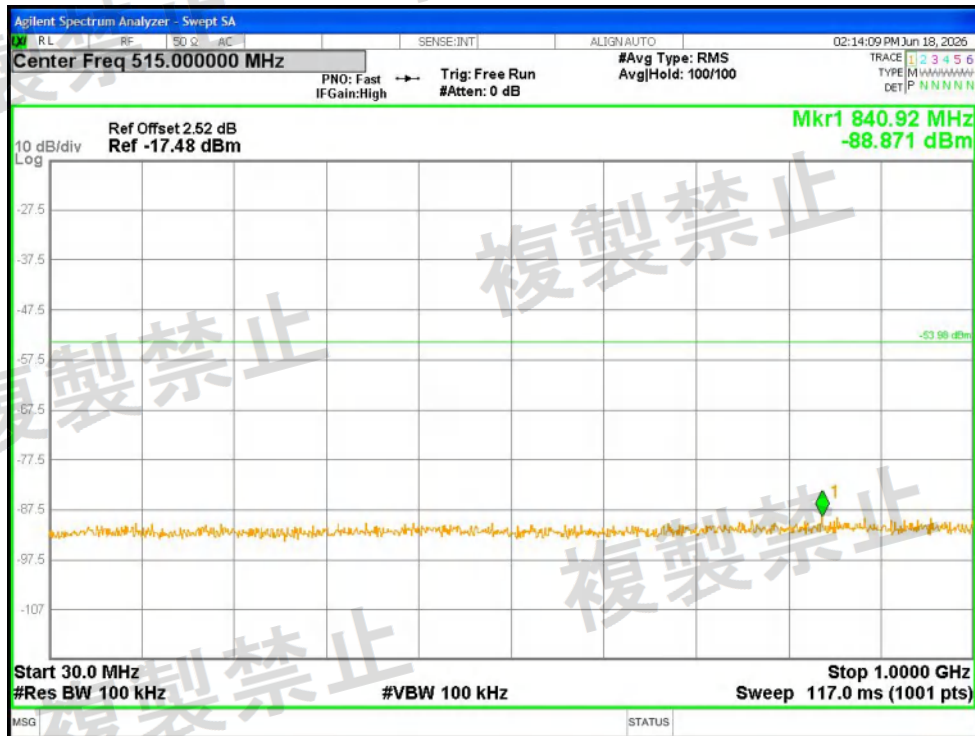


Rx. Spurious NVNT n40 2442MHz Ant1 @ 30MHz-1000MHz

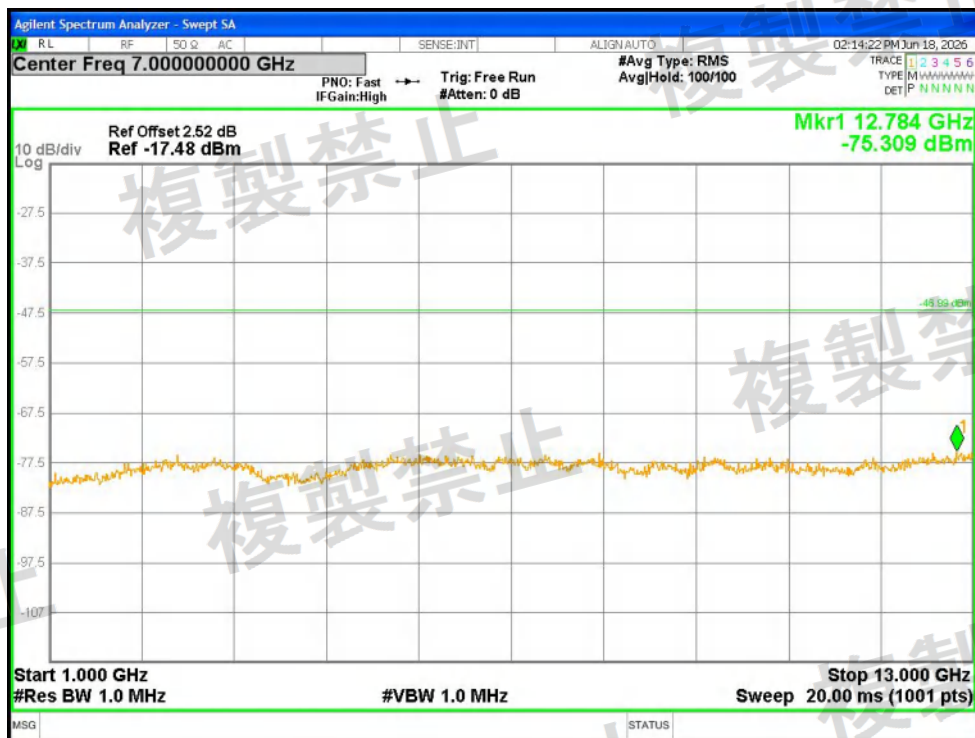

Rx. Spurious NVNT n40 2442MHz Ant1 @ 1000MHz-13000MHz

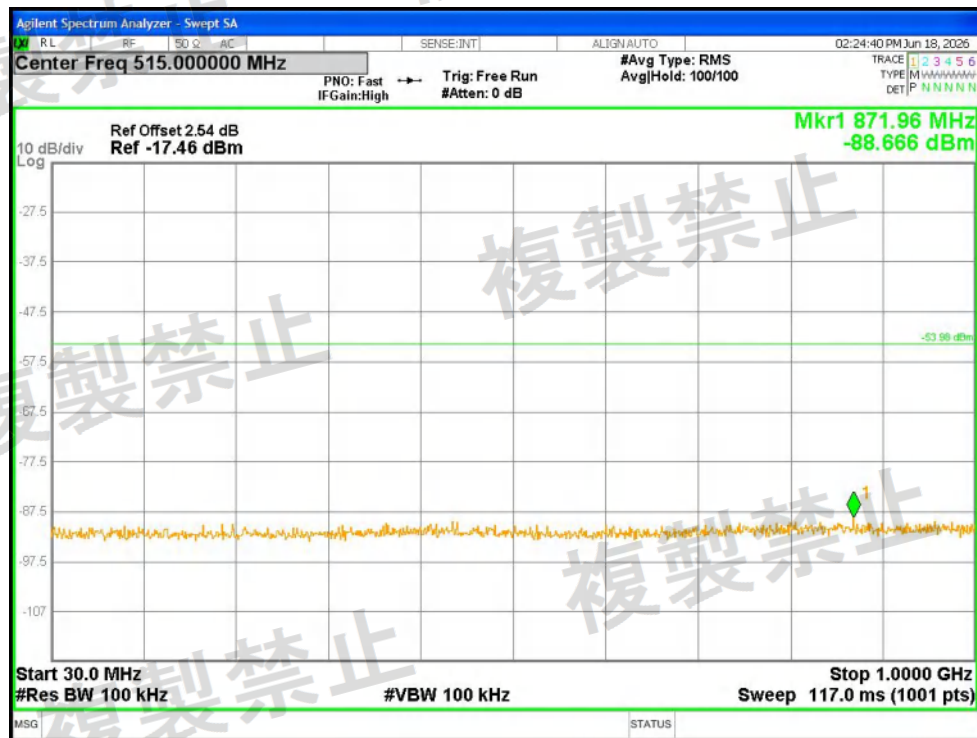

Rx. Spurious NVNT n40 2462MHz Ant1 @ 30MHz-1000MHz

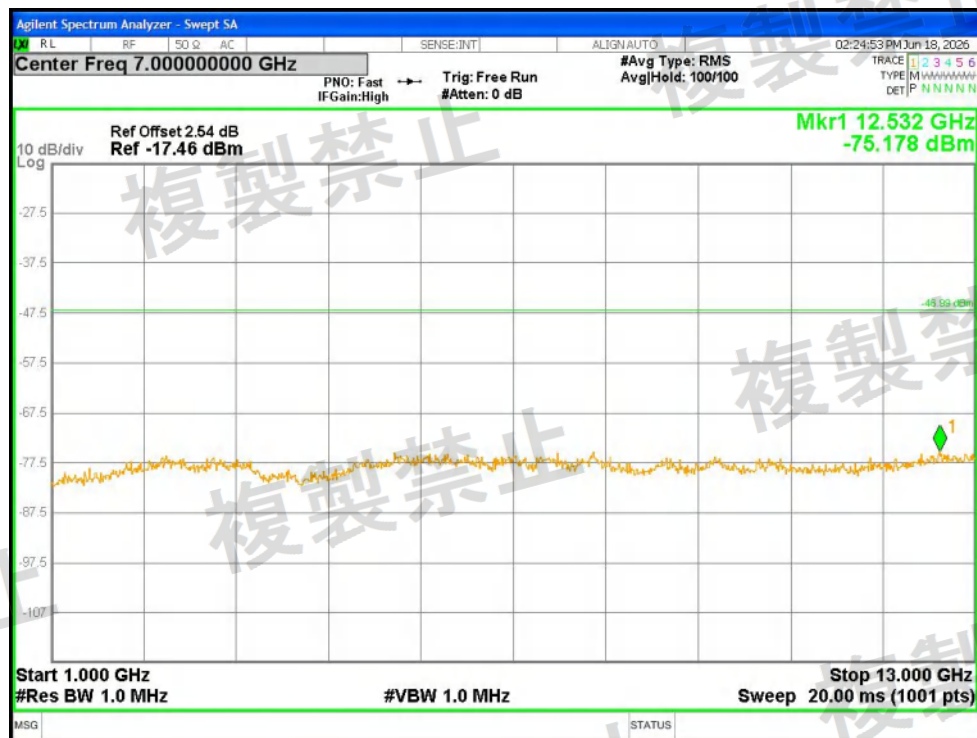

Rx. Spurious NVNT n40 2462MHz Ant1 @ 1000MHz-13000MHz