


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA
基本波頻率：	CH 40 : 5200 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	69.5 PK	74.0	-4.5	1.82 V	3	66.5	3.0
2	5150.00	53.3 AV	54.0	-0.7	1.82 V	3	50.3	3.0
3	*5200.00	123.8 PK			1.82 V	3	120.9	2.9
4	*5200.00	113.6 AV			1.82 V	3	110.7	2.9
5	#10400.00	47.5 PK	68.2	-20.7	1.49 V	214	34.2	13.3
6	15600.00	45.5 PK	74.0	-28.5	1.51 V	142	31.6	13.9
7	15600.00	35.8 AV	54.0	-18.2	1.51 V	142	21.9	13.9
8	20800.00	-	-	-	-	-	-	-
9	#26000.00	-	-	-	-	-	-	-
10	31200.00	-	-	-	-	-	-	-
11	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

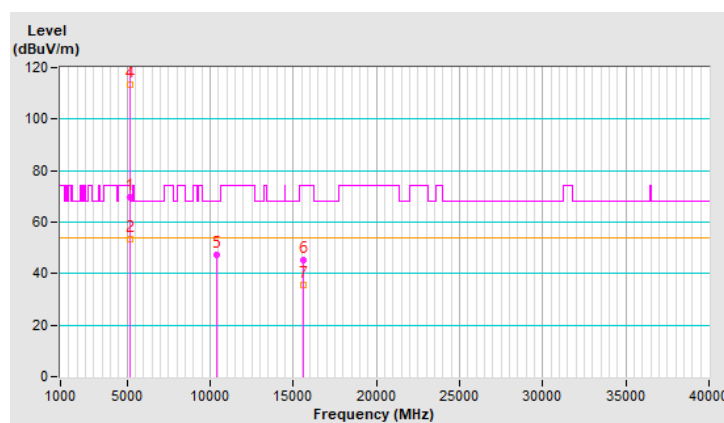


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA
基本波頻率：	CH 48 : 5240 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.6 PK	74.0	-21.4	2.56 H	209	49.6	3.0
2	5150.00	41.6 AV	54.0	-12.4	2.56 H	209	38.6	3.0
3	*5240.00	114.0 PK			2.56 H	209	111.1	2.9
4	*5240.00	104.1 AV			2.56 H	209	101.2	2.9
5	5350.00	52.0 PK	74.0	-22.0	2.56 H	209	49.0	3.0
6	5350.00	40.2 AV	54.0	-13.8	2.56 H	209	37.2	3.0
7	#10480.00	47.6 PK	68.2	-20.6	1.47 H	221	34.1	13.5
8	15720.00	45.2 PK	74.0	-28.8	1.47 H	138	31.8	13.4
9	15720.00	35.7 AV	54.0	-18.3	1.47 H	138	22.3	13.4
10	20960.00	-	-	-	-	-	-	-
11	#26200.00	-	-	-	-	-	-	-
12	31440.00	-	-	-	-	-	-	-
13	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

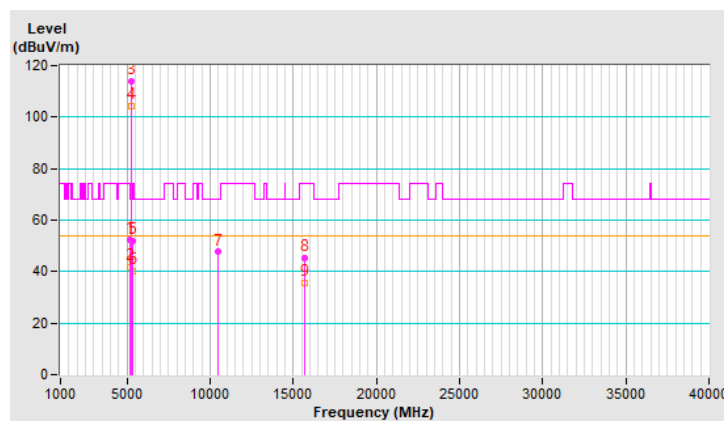


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA
基本波頻率：	CH 48 : 5240 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.8 PK	74.0	-16.2	1.81 V	15	54.8	3.0
2	5150.00	46.2 AV	54.0	-7.8	1.81 V	15	43.2	3.0
3	*5240.00	122.3 PK			1.81 V	15	119.4	2.9
4	*5240.00	110.8 AV			1.81 V	15	107.9	2.9
5	5350.00	56.9 PK	74.0	-17.1	1.81 V	15	53.9	3.0
6	5350.00	45.9 AV	54.0	-8.1	1.81 V	15	42.9	3.0
7	#10480.00	47.8 PK	68.2	-20.4	1.47 V	229	34.3	13.5
8	15720.00	46.2 PK	74.0	-27.8	1.54 V	142	32.8	13.4
9	15720.00	36.3 AV	54.0	-17.7	1.54 V	142	22.9	13.4
10	20960.00	-	-	-	-	-	-	-
11	#26200.00	-	-	-	-	-	-	-
12	31440.00	-	-	-	-	-	-	-
13	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

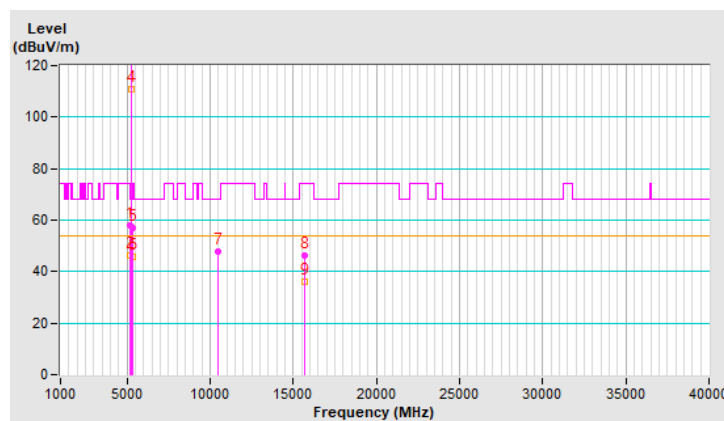


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA
基本波頻率：	CH 52 : 5260 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.8 PK	74.0	-19.2	2.56 H	201	51.8	3.0
2	5150.00	43.2 AV	54.0	-10.8	2.56 H	201	40.2	3.0
3	*5260.00	113.8 PK			2.56 H	201	111.0	2.8
4	*5260.00	104.4 AV			2.56 H	201	101.6	2.8
5	5350.00	54.5 PK	74.0	-19.5	2.56 H	201	51.5	3.0
6	5350.00	42.9 AV	54.0	-11.1	2.56 H	201	39.9	3.0
7	#10520.00	47.8 PK	68.2	-20.4	1.52 H	220	34.2	13.6
8	15780.00	46.2 PK	74.0	-27.8	1.49 H	149	33.1	13.1
9	15780.00	36.6 AV	54.0	-17.4	1.49 H	149	23.5	13.1
10	21040.00	-	-	-	-	-	-	-
11	#26300.00	-	-	-	-	-	-	-
12	31560.00	-	-	-	-	-	-	-
13	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

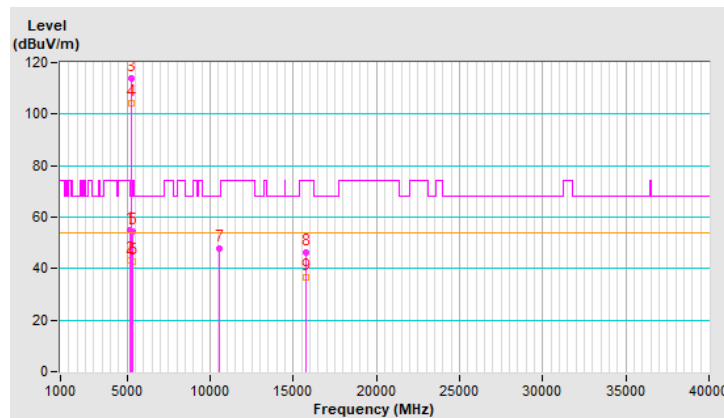


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA
基本波頻率：	CH 52：5260 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0℃	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.0 PK	74.0	-15.0	1.66 V	23	56.0	3.0
2	5150.00	47.6 AV	54.0	-6.4	1.66 V	23	44.6	3.0
3	*5260.00	124.6 PK			1.66 V	23	121.8	2.8
4	*5260.00	113.8 AV			1.66 V	23	111.0	2.8
5	5350.00	59.7 PK	74.0	-14.3	1.66 V	23	56.7	3.0
6	5350.00	47.7 AV	54.0	-6.3	1.66 V	23	44.7	3.0
7	#10520.00	47.0 PK	68.2	-21.2	1.56 V	203	33.4	13.6
8	15780.00	45.6 PK	74.0	-28.4	1.49 V	127	32.5	13.1
9	15780.00	36.1 AV	54.0	-17.9	1.49 V	127	23.0	13.1
10	21040.00	-	-	-	-	-	-	-
11	#26300.00	-	-	-	-	-	-	-
12	31560.00	-	-	-	-	-	-	-
13	#36820.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

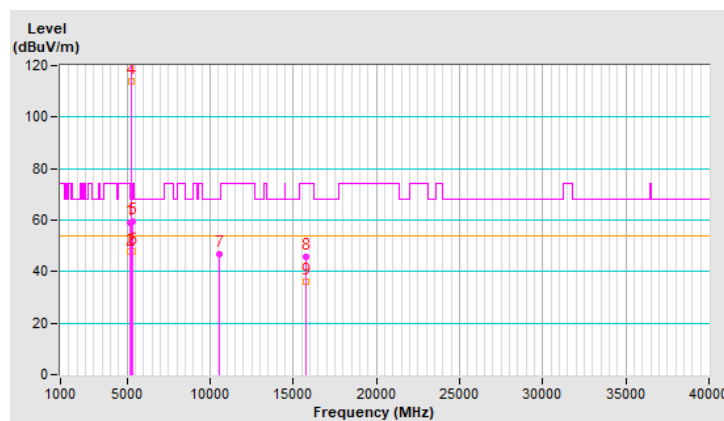


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA
基本波頻率：	CH 60 : 5300 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	113.5 PK			2.61 H	201	110.6	2.9
2	*5300.00	104.1 AV			2.61 H	201	101.2	2.9
3	5350.00	66.5 PK	74.0	-7.5	2.61 H	201	63.5	3.0
4	5350.00	47.5 AV	54.0	-6.5	2.61 H	201	44.5	3.0
5	10600.00	47.8 PK	74.0	-26.2	1.49 H	232	34.6	13.2
6	10600.00	37.8 AV	54.0	-16.2	1.49 H	232	24.6	13.2
7	15900.00	46.3 PK	74.0	-27.7	1.48 H	150	33.2	13.1
8	15900.00	36.4 AV	54.0	-17.6	1.48 H	150	23.3	13.1
9	21200.00	-	-	-	-	-	-	-
10	#26500.00	-	-	-	-	-	-	-
11	31800.00	-	-	-	-	-	-	-
12	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

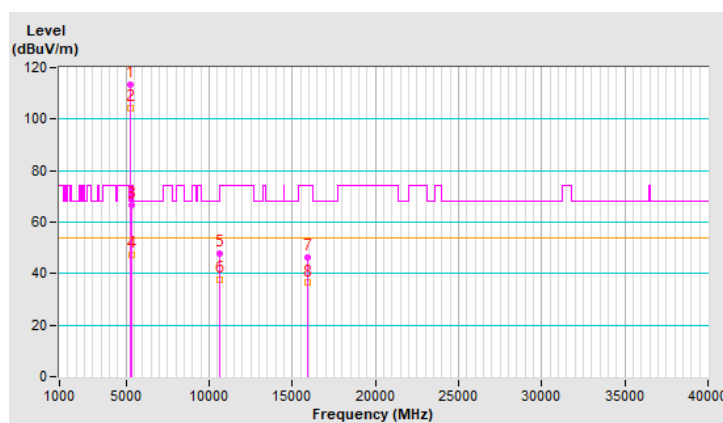


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA
基本波頻率：	CH 60 : 5300 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	124.1 PK			1.79 V	16	121.2	2.9
2	*5300.00	113.5 AV			1.79 V	16	110.6	2.9
3	5350.00	67.9 PK	74.0	-6.1	1.79 V	16	64.9	3.0
4	5350.00	53.8 AV	54.0	-0.2	1.79 V	16	50.8	3.0
5	10600.00	47.4 PK	74.0	-26.6	1.52 V	219	34.2	13.2
6	10600.00	37.3 AV	54.0	-16.7	1.52 V	219	24.1	13.2
7	15900.00	46.0 PK	74.0	-28.0	1.52 V	130	32.9	13.1
8	15900.00	36.6 AV	54.0	-17.4	1.52 V	130	23.5	13.1
9	21200.00	-	-	-	-	-	-	-
10	#26500.00	-	-	-	-	-	-	-
11	31800.00	-	-	-	-	-	-	-
12	#37100.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

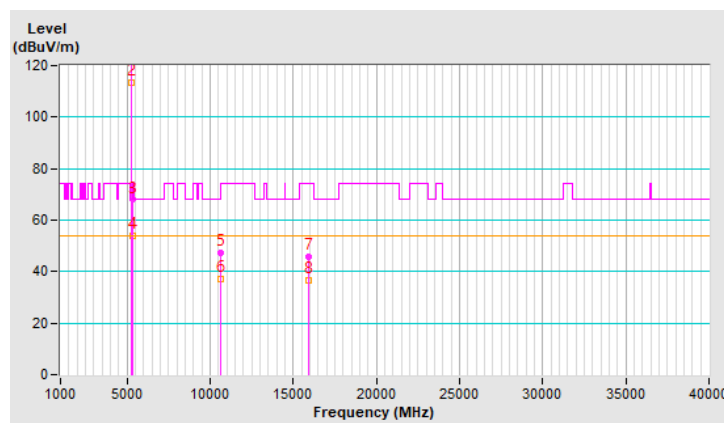


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA
基本波頻率：	CH 64：5320 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0℃	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	113.7 PK			2.24 H	220	110.8	2.9
2	*5320.00	103.6 AV			2.24 H	220	100.7	2.9
3	5350.00	66.8 PK	74.0	-7.2	2.24 H	220	63.8	3.0
4	5350.00	47.4 AV	54.0	-6.6	2.24 H	220	44.4	3.0
5	10640.00	46.9 PK	74.0	-27.1	1.44 H	223	33.6	13.3
6	10640.00	37.2 AV	54.0	-16.8	1.44 H	223	23.9	13.3
7	15960.00	46.4 PK	74.0	-27.6	1.55 H	146	33.0	13.4
8	15960.00	36.5 AV	54.0	-17.5	1.55 H	146	23.1	13.4
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

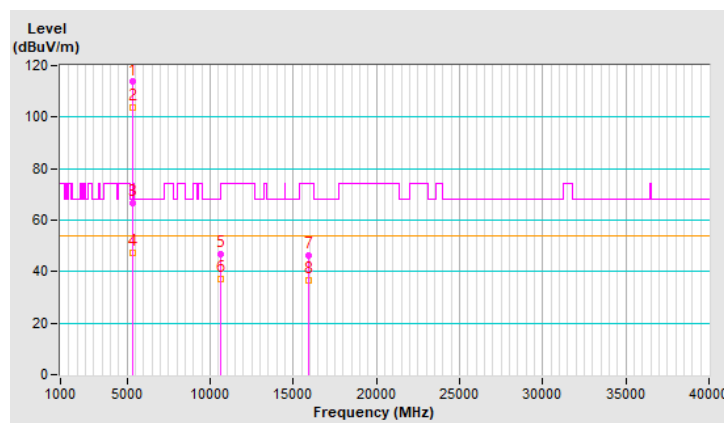



操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA
基本波頻率：	CH 64：5320 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0℃	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	122.0 PK			1.68 V	20	119.1	2.9
2	*5320.00	110.3 AV			1.68 V	20	107.4	2.9
3	5350.00	68.4 PK	74.0	-5.6	1.68 V	20	65.4	3.0
4	5350.00	53.7 AV	54.0	-0.3	1.68 V	20	50.7	3.0
5	10640.00	47.4 PK	74.0	-26.6	1.51 V	210	34.1	13.3
6	10640.00	37.4 AV	54.0	-16.6	1.51 V	210	24.1	13.3
7	15960.00	45.8 PK	74.0	-28.2	1.56 V	140	32.4	13.4
8	15960.00	36.4 AV	54.0	-17.6	1.56 V	140	23.0	13.4
9	21280.00	-	-	-	-	-	-	-
10	#26600.00	-	-	-	-	-	-	-
11	#31920.00	-	-	-	-	-	-	-
12	#37240.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

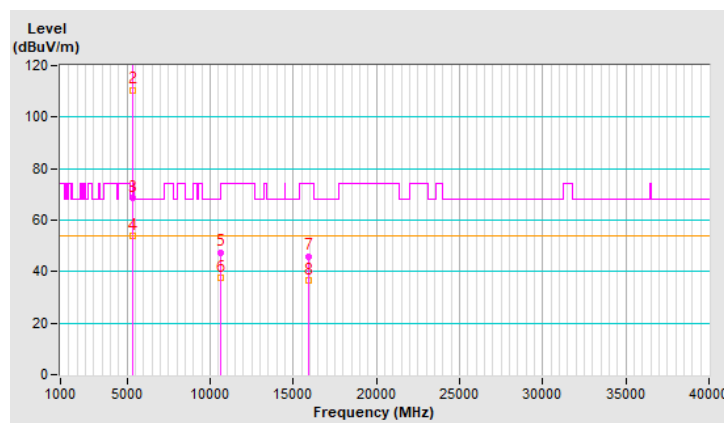




操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA
基本波頻率：	CH 100 : 5500 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0℃	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.7 PK	74.0	-10.3	1.68 V	7	60.5	3.2
2	5460.00	46.3 AV	54.0	-7.7	1.68 V	7	43.1	3.2
3	#5470.00	67.0 PK	68.2	-1.2	1.68 V	7	63.8	3.2
4	*5500.00	117.6 PK			1.68 V	7	114.3	3.3
5	*5500.00	106.4 AV			1.68 V	7	103.1	3.3
6	11000.00	47.3 PK	74.0	-26.7	1.46 V	221	33.3	14.0
7	11000.00	37.4 AV	54.0	-16.6	1.46 V	221	23.4	14.0
8	#16500.00	45.8 PK	68.2	-22.4	1.57 V	156	30.3	15.5
9	#22000.00	-	-	-	-	-	-	-
10	#27500.00	-	-	-	-	-	-	-
11	#33000.00	-	-	-	-	-	-	-
12	#38500.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

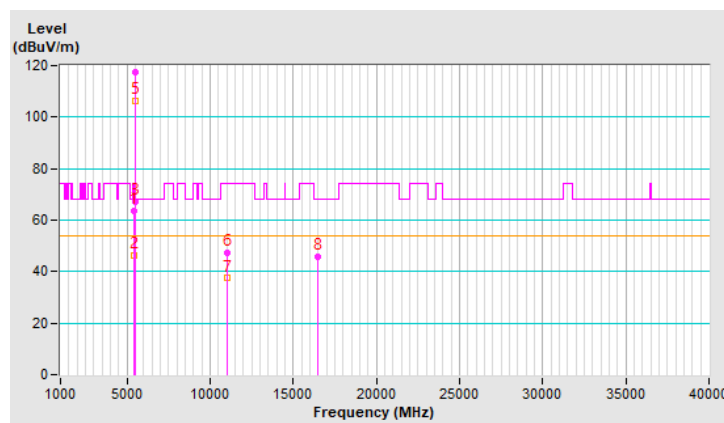


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA
基本波頻率：	CH 116 : 5580 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	114.1 PK			2.32 H	230	110.8	3.3
2	*5580.00	104.5 AV			2.32 H	230	101.2	3.3
3	11160.00	47.2 PK	74.0	-26.8	1.53 H	226	33.8	13.4
4	11160.00	37.1 AV	54.0	-16.9	1.53 H	226	23.7	13.4
5	#16740.00	45.6 PK	68.2	-22.6	1.51 H	138	29.0	16.6
6	22320.00	-	-	-	-	-	-	-
7	#27900.00	-	-	-	-	-	-	-
8	#33480.00	-	-	-	-	-	-	-
9	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

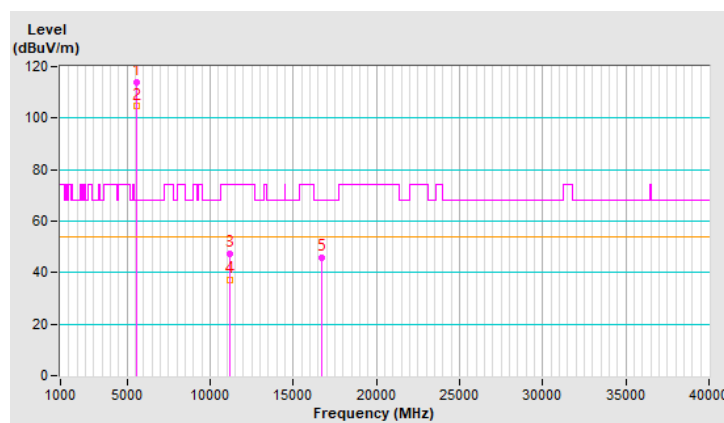


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA
基本波頻率：	CH 116 : 5580 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	124.2 PK			1.63 V	24	120.9	3.3
2	*5580.00	113.5 AV			1.63 V	24	110.2	3.3
3	11160.00	47.6 PK	74.0	-26.4	1.55 V	202	34.2	13.4
4	11160.00	37.6 AV	54.0	-16.4	1.55 V	202	24.2	13.4
5	#16740.00	45.7 PK	68.2	-22.5	1.50 V	128	29.1	16.6
6	22320.00	-	-	-	-	-	-	-
7	#27900.00	-	-	-	-	-	-	-
8	#33480.00	-	-	-	-	-	-	-
9	39060.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

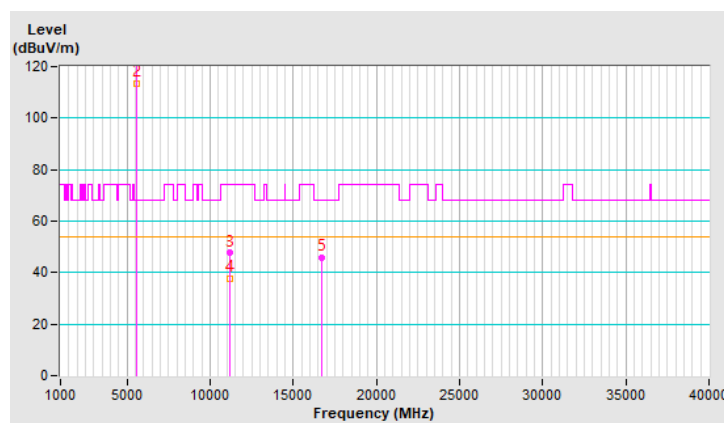


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA
基本波頻率：	CH 140 : 5700 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	110.7 PK			2.38 H	339	106.9	3.8
2	*5700.00	100.3 AV			2.38 H	339	96.5	3.8
3	#5725.00	58.9 PK	68.2	-9.3	2.38 H	339	55.1	3.8
4	11400.00	47.6 PK	74.0	-26.4	1.52 H	210	33.4	14.2
5	11400.00	37.8 AV	54.0	-16.2	1.52 H	210	23.6	14.2
6	#17100.00	45.4 PK	68.2	-22.8	1.45 H	144	27.9	17.5
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

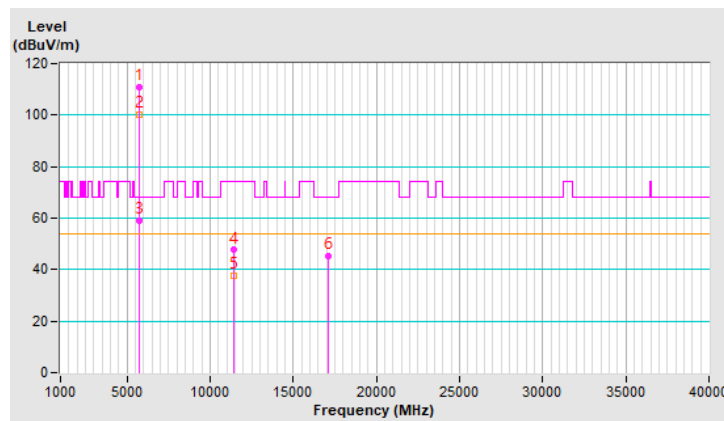


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA
基本波頻率：	CH 140 : 5700 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	119.6 PK			1.50 V	360	115.8	3.8
2	*5700.00	107.1 AV			1.50 V	360	103.3	3.8
3	#5725.00	67.7 PK	68.2	-0.5	1.50 V	360	63.9	3.8
4	11400.00	47.2 PK	74.0	-26.8	1.52 V	228	33.0	14.2
5	11400.00	37.2 AV	54.0	-16.8	1.52 V	228	23.0	14.2
6	#17100.00	45.7 PK	68.2	-22.5	1.56 V	144	28.2	17.5
7	22800.00	-	-	-	-	-	-	-
8	#28500.00	-	-	-	-	-	-	-
9	#34200.00	-	-	-	-	-	-	-
10	39900.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

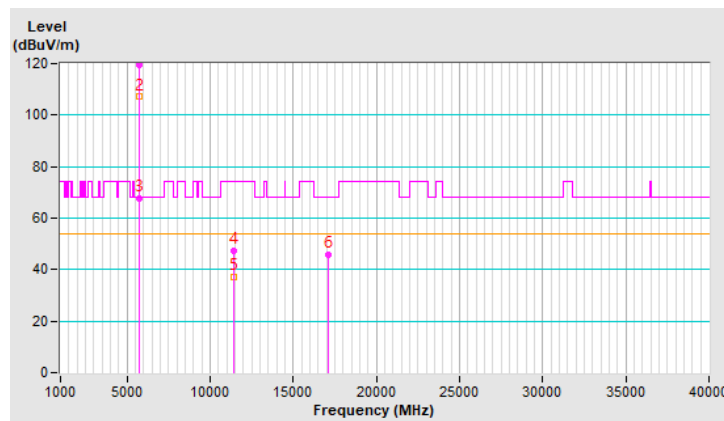


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA
基本波頻率：	CH 144 : 5720 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0℃	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.3 PK	74.0	-20.7	2.42 H	344	50.1	3.2
2	5460.00	40.9 AV	54.0	-13.1	2.42 H	344	37.7	3.2
3	#5470.00	56.3 PK	68.2	-11.9	2.42 H	344	53.1	3.2
4	*5720.00	113.9 PK			2.42 H	344	110.1	3.8
5	*5720.00	104.5 AV			2.42 H	344	100.7	3.8
6	#5850.00	56.5 PK	68.2	-11.7	2.42 H	344	52.3	4.2
7	11440.00	47.7 PK	74.0	-26.3	1.46 H	215	33.6	14.1
8	11440.00	37.7 AV	54.0	-16.3	1.46 H	215	23.6	14.1
9	#17160.00	46.6 PK	68.2	-21.6	1.53 H	151	29.6	17.0
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

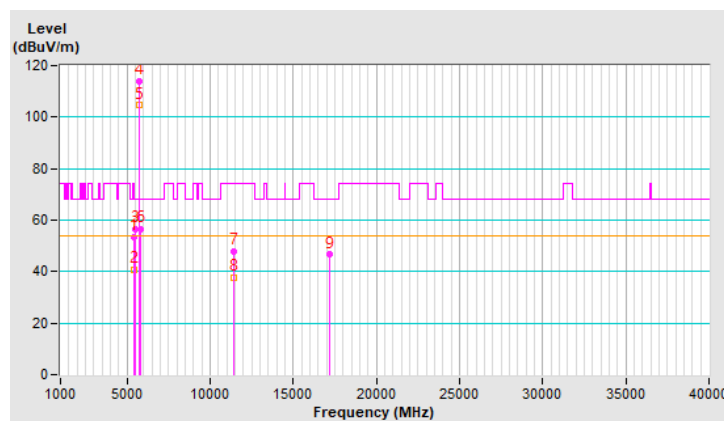


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA
基本波頻率：	CH 144 : 5720 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0℃	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.3 PK	74.0	-16.7	1.50 V	360	54.1	3.2
2	5460.00	44.7 AV	54.0	-9.3	1.50 V	360	41.5	3.2
3	#5470.00	58.4 PK	68.2	-9.8	1.50 V	360	55.2	3.2
4	*5720.00	124.5 PK			1.50 V	360	120.7	3.8
5	*5720.00	113.2 AV			1.50 V	360	109.4	3.8
6	#5850.00	59.1 PK	68.2	-9.1	1.50 V	360	54.9	4.2
7	11440.00	47.8 PK	74.0	-26.2	1.49 V	218	33.7	14.1
8	11440.00	37.9 AV	54.0	-16.1	1.49 V	218	23.8	14.1
9	#17160.00	45.8 PK	68.2	-22.4	1.52 V	130	28.8	17.0
10	22880.00	-	-	-	-	-	-	-
11	#28600.00	-	-	-	-	-	-	-
12	#34320.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

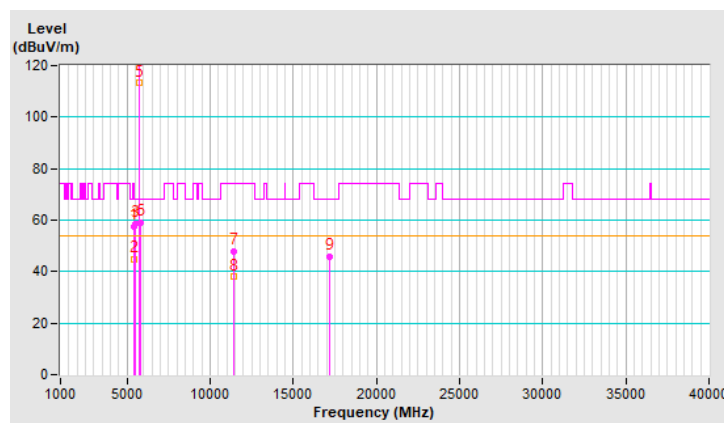


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA
基本波頻率：	CH 149 : 5745 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	117.7 PK			1.19 H	44	113.9	3.8
2	*5745.00	108.3 AV			1.19 H	44	104.5	3.8
3	11490.00	47.1 PK	74.0	-26.9	1.49 H	209	33.1	14.0
4	11490.00	37.2 AV	54.0	-16.8	1.49 H	209	23.2	14.0
5	#17235.00	45.9 PK	68.2	-22.3	1.50 H	142	29.4	16.5
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

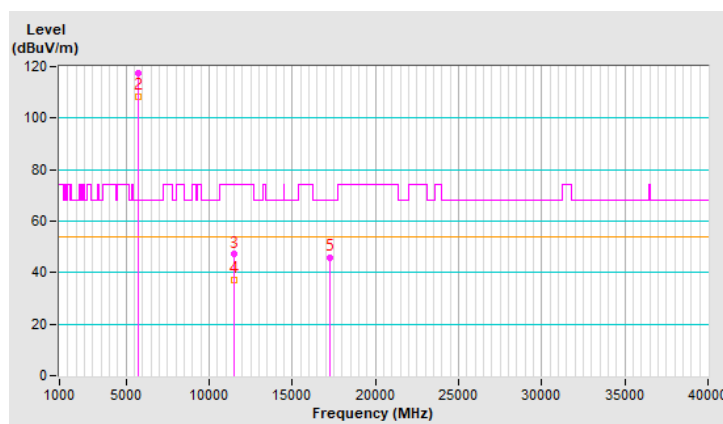


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA
基本波頻率：	CH 149 : 5745 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	125.4 PK			1.49 V	329	121.6	3.8
2	*5745.00	115.4 AV			1.49 V	329	111.6	3.8
3	11490.00	48.0 PK	74.0	-26.0	1.55 V	221	34.0	14.0
4	11490.00	38.0 AV	54.0	-16.0	1.55 V	221	24.0	14.0
5	#17235.00	46.3 PK	68.2	-21.9	1.46 V	128	29.8	16.5
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

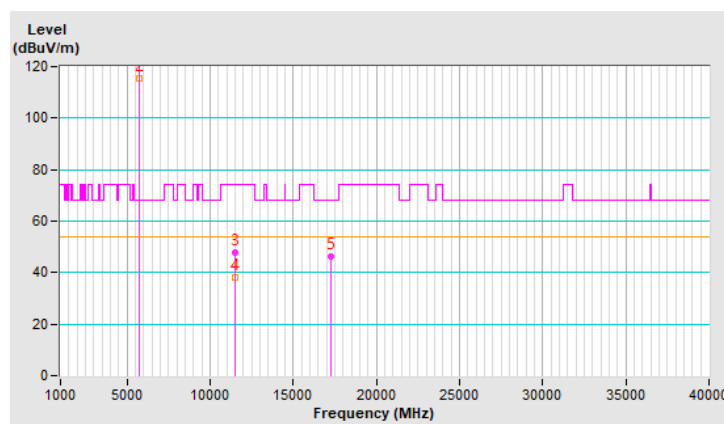


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA
基本波頻率：	CH 157 : 5785 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	118.1 PK			1.03 H	62	114.2	3.9
2	*5785.00	108.9 AV			1.03 H	62	105.0	3.9
3	11570.00	47.8 PK	74.0	-26.2	1.51 H	217	34.2	13.6
4	11570.00	38.0 AV	54.0	-16.0	1.51 H	217	24.4	13.6
5	#17355.00	45.6 PK	68.2	-22.6	1.54 H	145	28.6	17.0
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

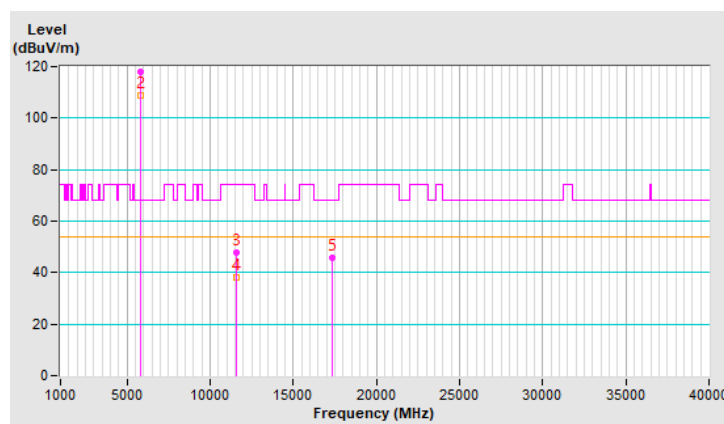


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA
基本波頻率：	CH 157 : 5785 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	125.5 PK			1.52 V	328	121.6	3.9
2	*5785.00	115.6 AV			1.52 V	328	111.7	3.9
3	11570.00	47.8 PK	74.0	-26.2	1.54 V	204	34.2	13.6
4	11570.00	37.9 AV	54.0	-16.1	1.54 V	204	24.3	13.6
5	#17355.00	45.4 PK	68.2	-22.8	1.53 V	135	28.4	17.0
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

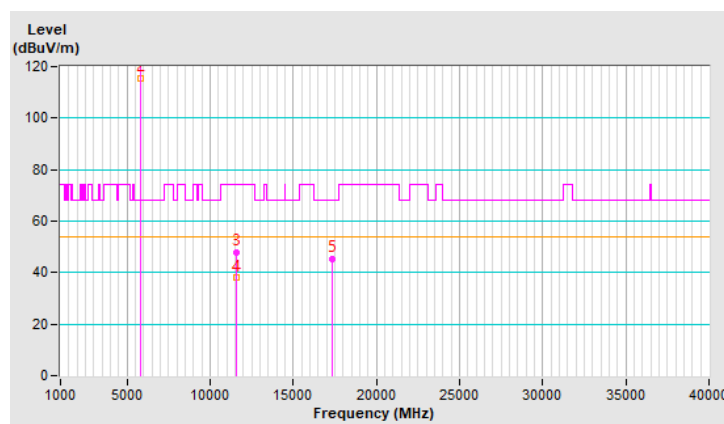


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA
基本波頻率：	CH 165 : 5825 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	118.6 PK			1.28 H	43	114.5	4.1
2	*5825.00	108.9 AV			1.28 H	43	104.8	4.1
3	11650.00	47.4 PK	74.0	-26.6	1.45 H	216	33.9	13.5
4	11650.00	37.6 AV	54.0	-16.4	1.45 H	216	24.1	13.5
5	#17475.00	45.3 PK	68.2	-22.9	1.52 H	149	26.7	18.6
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

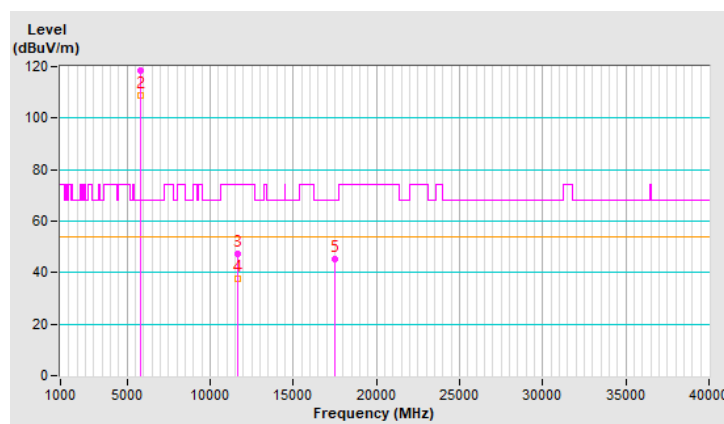


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA
基本波頻率：	CH 165 : 5825 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	125.7 PK			1.50 V	360	121.6	4.1
2	*5825.00	115.8 AV			1.50 V	360	111.7	4.1
3	11650.00	47.3 PK	74.0	-26.7	1.45 V	221	33.8	13.5
4	11650.00	37.1 AV	54.0	-16.9	1.45 V	221	23.6	13.5
5	#17475.00	46.4 PK	68.2	-21.8	1.47 V	134	27.8	18.6
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

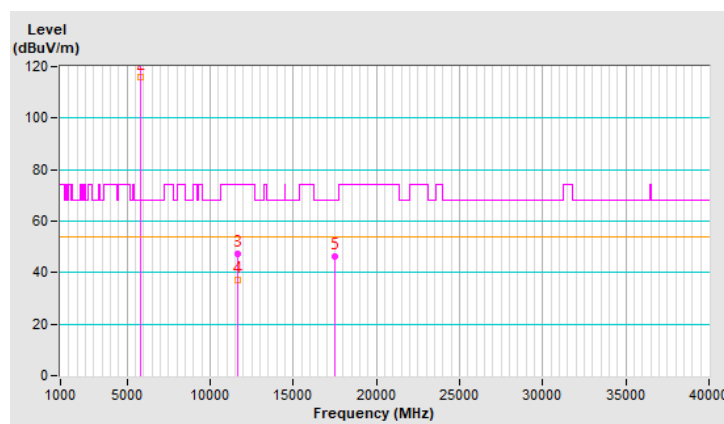


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA
基本波頻率：	CH 38 : 5190 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 8 月 1 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.9 PK	74.0	-16.1	2.92 H	212	54.9	3.0
2	5150.00	47.2 AV	54.0	-6.8	2.92 H	212	44.2	3.0
3	*5190.00	105.3 PK			2.92 H	212	102.3	3.0
4	*5190.00	94.5 AV			2.92 H	212	91.5	3.0
5	#10380.00	47.7 PK	68.2	-20.5	1.45 H	208	34.5	13.2
6	15570.00	45.3 PK	74.0	-28.7	1.55 H	143	31.5	13.8
7	15570.00	35.8 AV	54.0	-18.2	1.55 H	143	22.0	13.8
8	20760.00	-	-	-	-	-	-	-
9	#25950.00	-	-	-	-	-	-	-
10	#31140.00	-	-	-	-	-	-	-
11	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

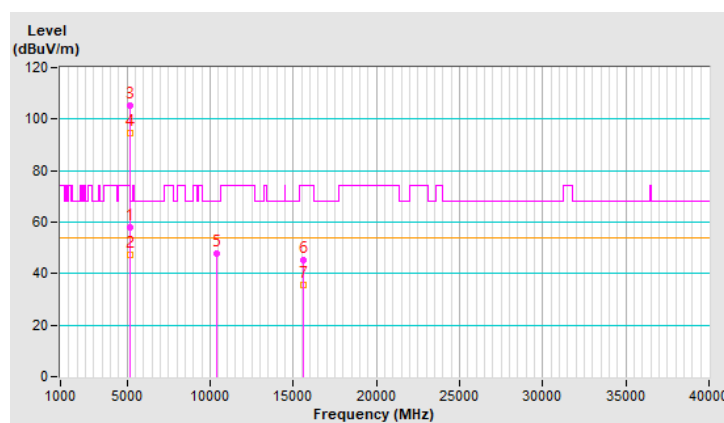


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA
基本波頻率：	CH 38 : 5190 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 8 月 1 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.9 PK	74.0	-9.1	2.69 V	297	61.9	3.0
2	5150.00	53.5 AV	54.0	-0.5	2.69 V	297	50.5	3.0
3	*5190.00	113.7 PK			2.69 V	297	110.7	3.0
4	*5190.00	103.1 AV			2.69 V	297	100.1	3.0
5	#10380.00	47.5 PK	68.2	-20.7	1.45 V	212	34.3	13.2
6	15570.00	46.4 PK	74.0	-27.6	1.47 V	151	32.6	13.8
7	15570.00	36.7 AV	54.0	-17.3	1.47 V	151	22.9	13.8
8	20760.00	-	-	-	-	-	-	-
9	#25950.00	-	-	-	-	-	-	-
10	#31140.00	-	-	-	-	-	-	-
11	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

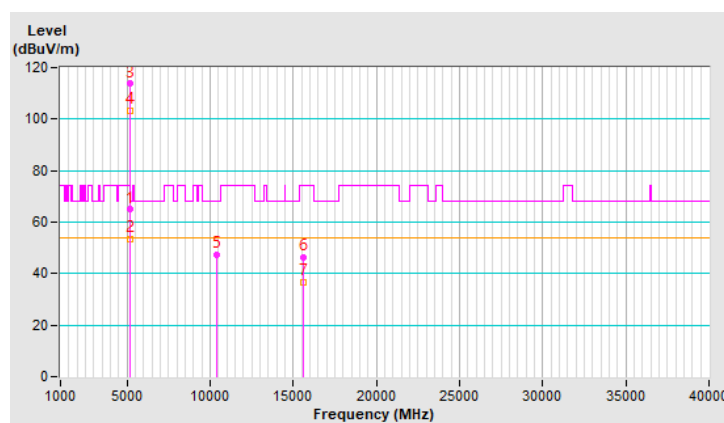


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA
基本波頻率：	CH 46：5230 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0℃	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5230.00	114.0 PK			2.96 H	196	111.1	2.9
2	*5230.00	103.9 AV			2.96 H	196	101.0	2.9
3	5350.00	53.1 PK	74.0	-20.9	2.96 H	196	50.1	3.0
4	5350.00	42.5 AV	54.0	-11.5	2.96 H	196	39.5	3.0
5	#10460.00	47.6 PK	68.2	-20.6	1.51 H	228	34.1	13.5
6	15690.00	46.0 PK	74.0	-28.0	1.56 H	136	32.5	13.5
7	15690.00	36.2 AV	54.0	-17.8	1.56 H	136	22.7	13.5
8	20920.00	-	-	-	-	-	-	-
9	#26150.00	-	-	-	-	-	-	-
10	31380.00	-	-	-	-	-	-	-
11	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

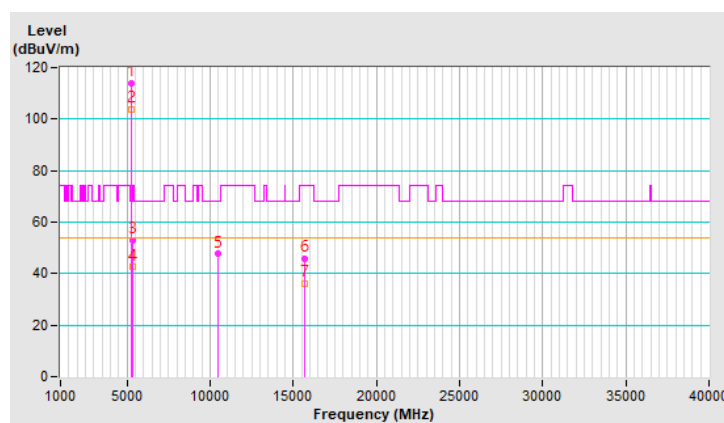


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA
基本波頻率：	CH 46：5230 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0℃	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5230.00	121.8 PK			1.79 V	14	118.9	2.9
2	*5230.00	111.3 AV			1.79 V	14	108.4	2.9
3	5350.00	60.1 PK	74.0	-13.9	1.79 V	14	57.1	3.0
4	5350.00	48.4 AV	54.0	-5.6	1.79 V	14	45.4	3.0
5	#10460.00	48.1 PK	68.2	-20.1	1.45 V	217	34.6	13.5
6	15690.00	46.3 PK	74.0	-27.7	1.54 V	126	32.8	13.5
7	15690.00	36.5 AV	54.0	-17.5	1.54 V	126	23.0	13.5
8	20920.00	-	-	-	-	-	-	-
9	#26150.00	-	-	-	-	-	-	-
10	31380.00	-	-	-	-	-	-	-
11	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

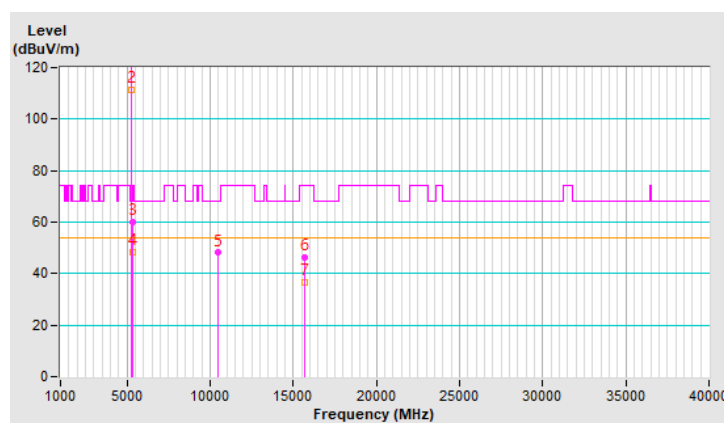


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA
基本波頻率：	CH 54 : 5270 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5270.00	113.8 PK			2.93 H	184	111.0	2.8
2	*5270.00	103.6 AV			2.93 H	184	100.8	2.8
3	5354.00	60.8 PK	74.0	-13.2	2.93 H	184	57.8	3.0
4	5354.00	47.7 AV	54.0	-6.3	2.93 H	184	44.7	3.0
5	#10540.00	47.9 PK	68.2	-20.3	1.51 H	216	34.5	13.4
6	15810.00	45.9 PK	74.0	-28.1	1.48 H	129	33.0	12.9
7	15810.00	36.3 AV	54.0	-17.7	1.48 H	129	23.4	12.9
8	21080.00	-	-	-	-	-	-	-
9	#26350.00	-	-	-	-	-	-	-
10	31620.00	-	-	-	-	-	-	-
11	#36890.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

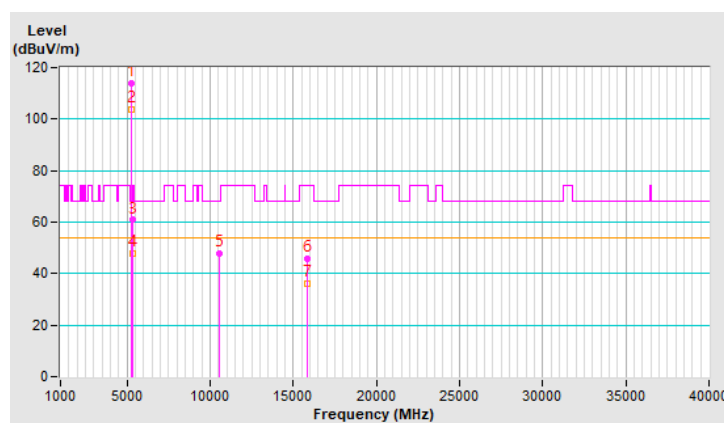


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA
基本波頻率：	CH 54 : 5270 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5270.00	121.2 PK			1.80 V	16	118.4	2.8
2	*5270.00	111.0 AV			1.80 V	16	108.2	2.8
3	5354.00	66.9 PK	74.0	-7.1	1.80 V	16	63.9	3.0
4	5354.00	53.7 AV	54.0	-0.3	1.80 V	16	50.7	3.0
5	#10540.00	47.1 PK	68.2	-21.1	1.44 V	216	33.7	13.4
6	15810.00	45.2 PK	74.0	-28.8	1.46 V	125	32.3	12.9
7	15810.00	35.7 AV	54.0	-18.3	1.46 V	125	22.8	12.9
8	21080.00	-	-	-	-	-	-	-
9	#26350.00	-	-	-	-	-	-	-
10	31620.00	-	-	-	-	-	-	-
11	#36890.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

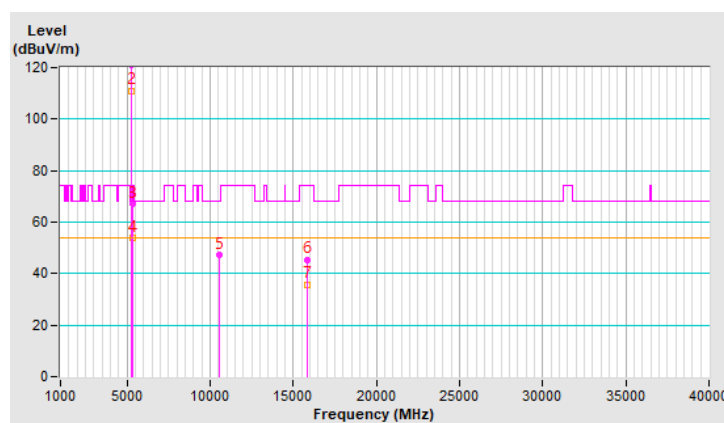


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA
基本波頻率：	CH 62 : 5310 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0℃	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	107.3 PK			2.52 H	212	104.4	2.9
2	*5310.00	97.0 AV			2.52 H	212	94.1	2.9
3	5350.00	57.7 PK	74.0	-16.3	2.52 H	212	54.7	3.0
4	5350.00	43.7 AV	54.0	-10.3	2.52 H	212	40.7	3.0
5	10620.00	47.5 PK	74.0	-26.5	1.46 H	208	34.2	13.3
6	10620.00	37.2 AV	54.0	-16.8	1.46 H	208	23.9	13.3
7	15930.00	46.3 PK	74.0	-27.7	1.50 H	137	33.0	13.3
8	15930.00	36.6 AV	54.0	-17.4	1.50 H	137	23.3	13.3
9	21240.00	-	-	-	-	-	-	-
10	#26550.00	-	-	-	-	-	-	-
11	#31860.00	-	-	-	-	-	-	-
12	#37170.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

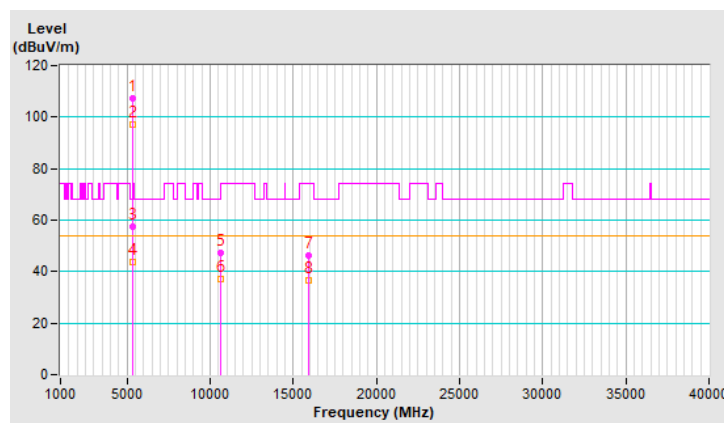


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA
基本波頻率：	CH 62 : 5310 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	115.4 PK			1.78 V	14	112.5	2.9
2	*5310.00	104.4 AV			1.78 V	14	101.5	2.9
3	5350.00	70.3 PK	74.0	-3.7	1.78 V	14	67.3	3.0
4	5350.00	53.8 AV	54.0	-0.2	1.78 V	14	50.8	3.0
5	10620.00	47.4 PK	74.0	-26.6	1.46 V	212	34.1	13.3
6	10620.00	37.5 AV	54.0	-16.5	1.46 V	212	24.2	13.3
7	15930.00	45.9 PK	74.0	-28.1	1.54 V	152	32.6	13.3
8	15930.00	36.2 AV	54.0	-17.8	1.54 V	152	22.9	13.3
9	21240.00	-	-	-	-	-	-	-
10	#26550.00	-	-	-	-	-	-	-
11	#31860.00	-	-	-	-	-	-	-
12	#37170.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

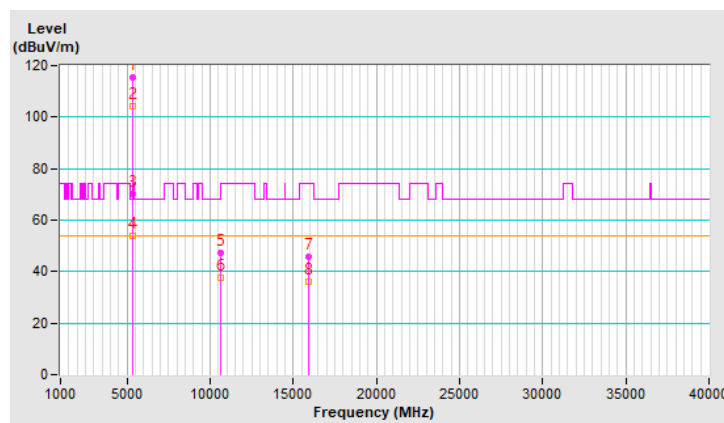


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA
基本波頻率：	CH 102 : 5510 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5458.05	54.0 PK	74.0	-20.0	1.20 H	355	50.8	3.2
2	5458.05	43.0 AV	54.0	-11.0	1.20 H	355	39.8	3.2
3	#5467.00	58.0 PK	68.2	-10.2	1.20 H	355	54.8	3.2
4	*5510.00	105.9 PK			1.20 H	355	102.7	3.2
5	*5510.00	94.6 AV			1.20 H	355	91.4	3.2
6	11020.00	48.1 PK	74.0	-25.9	1.46 H	217	34.3	13.8
7	11020.00	38.0 AV	54.0	-16.0	1.46 H	217	24.2	13.8
8	#16530.00	46.3 PK	68.2	-21.9	1.49 H	143	30.6	15.7
9	22040.00	-	-	-	-	-	-	-
10	#27550.00	-	-	-	-	-	-	-
11	#33060.00	-	-	-	-	-	-	-
12	#38570.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

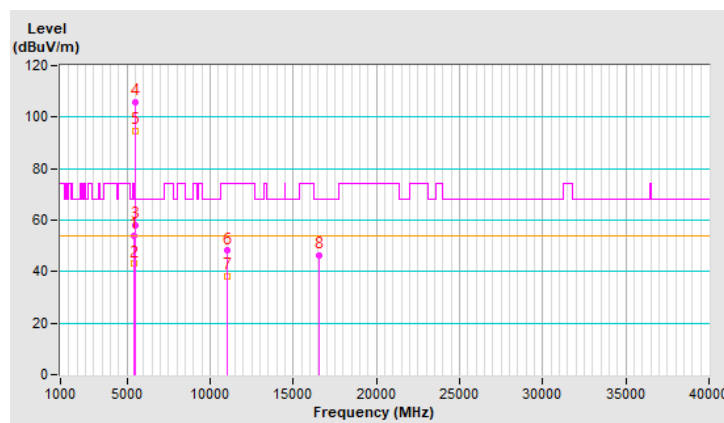


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA
基本波頻率：	CH 102 : 5510 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5457.79	62.1 PK	74.0	-11.9	1.68 V	356	58.9	3.2
2	5457.79	49.6 AV	54.0	-4.4	1.68 V	356	46.4	3.2
3	#5467.41	66.5 PK	68.2	-1.7	1.68 V	356	63.3	3.2
4	*5510.00	111.8 PK			1.68 V	356	108.6	3.2
5	*5510.00	101.7 AV			1.68 V	356	98.5	3.2
6	11020.00	46.9 PK	74.0	-27.1	1.45 V	212	33.1	13.8
7	11020.00	37.2 AV	54.0	-16.8	1.45 V	212	23.4	13.8
8	#16530.00	46.0 PK	68.2	-22.2	1.57 V	145	30.3	15.7
9	22040.00	-	-	-	-	-	-	-
10	#27550.00	-	-	-	-	-	-	-
11	#33060.00	-	-	-	-	-	-	-
12	#38570.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

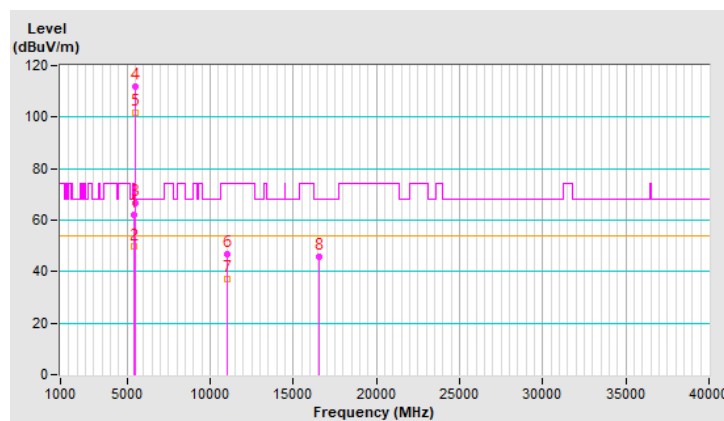


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA
基本波頻率：	CH 110 : 5550 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	112.0 PK			1.28 H	302	108.7	3.3
2	*5550.00	102.2 AV			1.28 H	302	98.9	3.3
3	11100.00	48.0 PK	74.0	-26.0	1.49 H	232	34.7	13.3
4	11100.00	37.9 AV	54.0	-16.1	1.49 H	232	24.6	13.3
5	#16650.00	46.2 PK	68.2	-22.0	1.54 H	155	29.6	16.6
6	22200.00	-	-	-	-	-	-	-
7	#27750.00	-	-	-	-	-	-	-
8	#33300.00	-	-	-	-	-	-	-
9	38850.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

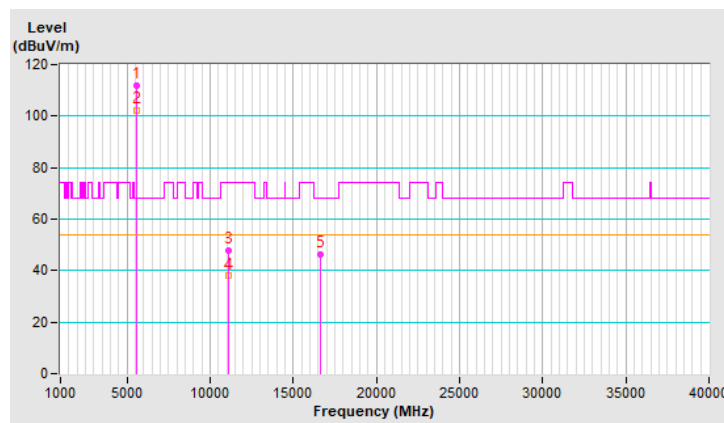


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA
基本波頻率：	CH 110 : 5550 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	120.6 PK			1.67 V	355	117.3	3.3
2	*5550.00	109.9 AV			1.67 V	355	106.6	3.3
3	11100.00	48.2 PK	74.0	-25.8	1.49 V	229	34.9	13.3
4	11100.00	38.0 AV	54.0	-16.0	1.49 V	229	24.7	13.3
5	#16650.00	45.7 PK	68.2	-22.5	1.48 V	131	29.1	16.6
6	22200.00	-	-	-	-	-	-	-
7	#27750.00	-	-	-	-	-	-	-
8	#33300.00	-	-	-	-	-	-	-
9	38850.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

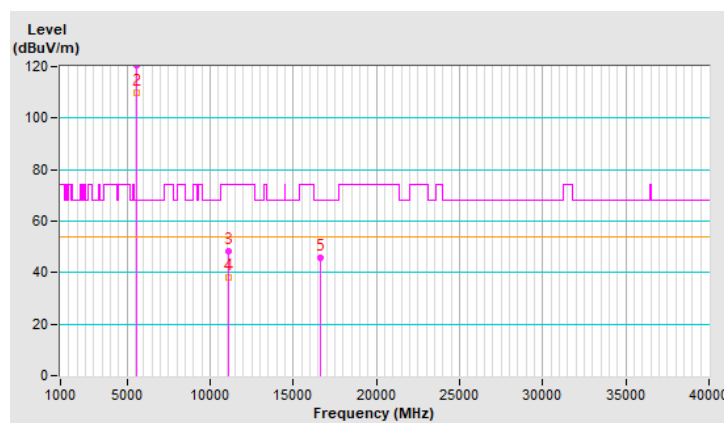


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA
基本波頻率：	CH 134 : 5670 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	120.2 PK			1.63 H	344	116.6	3.6
2	*5670.00	109.7 AV			1.63 H	344	106.1	3.6
3	#5725.00	66.7 PK	68.2	-1.5	1.63 H	344	62.9	3.8
4	11340.00	47.8 PK	74.0	-26.2	1.53 H	222	33.7	14.1
5	11340.00	37.7 AV	54.0	-16.3	1.53 H	222	23.6	14.1
6	#17010.00	46.0 PK	68.2	-22.2	1.56 H	148	28.2	17.8
7	22680.00	-	-	-	-	-	-	-
8	#28350.00	-	-	-	-	-	-	-
9	#34020.00	-	-	-	-	-	-	-
10	39690.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

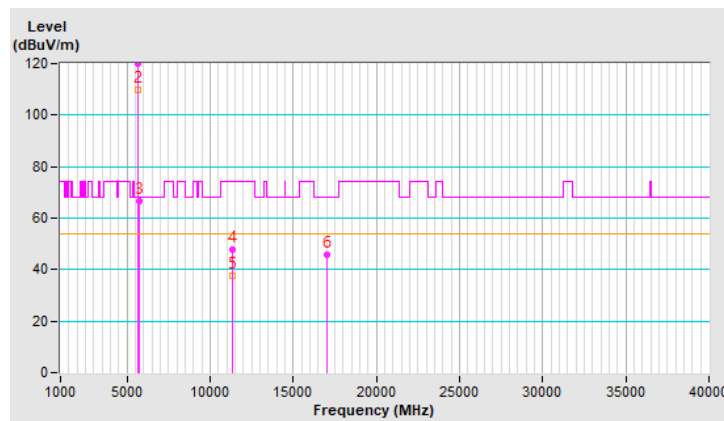


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA
基本波頻率：	CH 134 : 5670 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	120.2 PK			1.63 V	344	116.6	3.6
2	*5670.00	109.7 AV			1.63 V	344	106.1	3.6
3	#5725.00	66.7 PK	68.2	-1.5	1.63 V	344	62.9	3.8
4	11340.00	47.8 PK	74.0	-26.2	1.53 V	222	33.7	14.1
5	11340.00	37.7 AV	54.0	-16.3	1.53 V	222	23.6	14.1
6	#17010.00	46.0 PK	68.2	-22.2	1.56 V	148	28.2	17.8
7	22680.00	-	-	-	-	-	-	-
8	#28350.00	-	-	-	-	-	-	-
9	#34020.00	-	-	-	-	-	-	-
10	39690.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

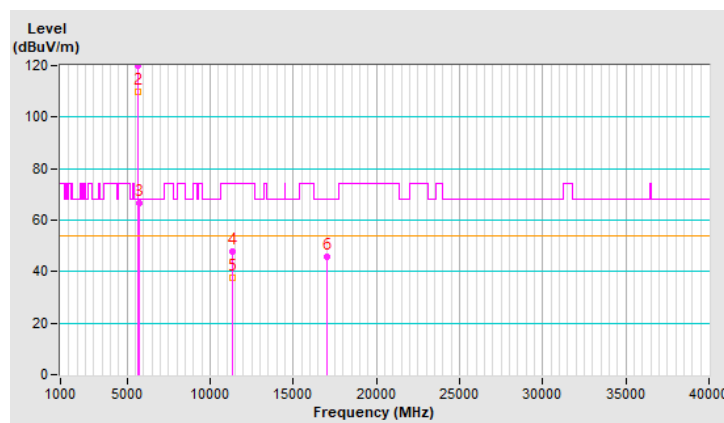


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA
基本波頻率：	CH 142 : 5710 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.6 PK	74.0	-20.4	1.28 H	328	50.4	3.2
2	5460.00	41.3 AV	54.0	-12.7	1.28 H	328	38.1	3.2
3	#5470.00	56.4 PK	68.2	-11.8	1.28 H	328	53.2	3.2
4	*5710.00	112.6 PK			1.28 H	328	108.8	3.8
5	*5710.00	102.9 AV			1.28 H	328	99.1	3.8
6	#5850.00	57.0 PK	68.2	-11.2	1.28 H	328	52.8	4.2
7	11420.00	48.1 PK	74.0	-25.9	1.49 H	201	34.0	14.1
8	11420.00	38.0 AV	54.0	-16.0	1.49 H	201	23.9	14.1
9	#17130.00	46.2 PK	68.2	-22.0	1.56 H	136	29.0	17.2
10	22840.00	-	-	-	-	-	-	-
11	#28550.00	-	-	-	-	-	-	-
12	#34260.00	-	-	-	-	-	-	-
13	39970.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

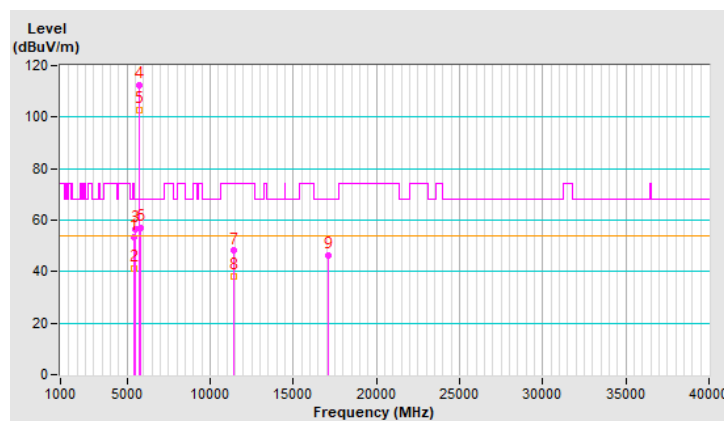


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA
基本波頻率：	CH 142 : 5710 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.0 PK	74.0	-16.0	1.63 V	359	54.8	3.2
2	5460.00	45.2 AV	54.0	-8.8	1.63 V	359	42.0	3.2
3	#5470.00	58.1 PK	68.2	-10.1	1.63 V	359	54.9	3.2
4	*5710.00	120.9 PK			1.63 V	359	117.1	3.8
5	*5710.00	110.1 AV			1.63 V	359	106.3	3.8
6	#5850.00	58.9 PK	68.2	-9.3	1.63 V	359	54.7	4.2
7	11420.00	47.5 PK	74.0	-26.5	1.50 V	215	33.4	14.1
8	11420.00	37.3 AV	54.0	-16.7	1.50 V	215	23.2	14.1
9	#17130.00	45.8 PK	68.2	-22.4	1.56 V	139	28.6	17.2
10	22840.00	-	-	-	-	-	-	-
11	#28550.00	-	-	-	-	-	-	-
12	#34260.00	-	-	-	-	-	-	-
13	39970.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

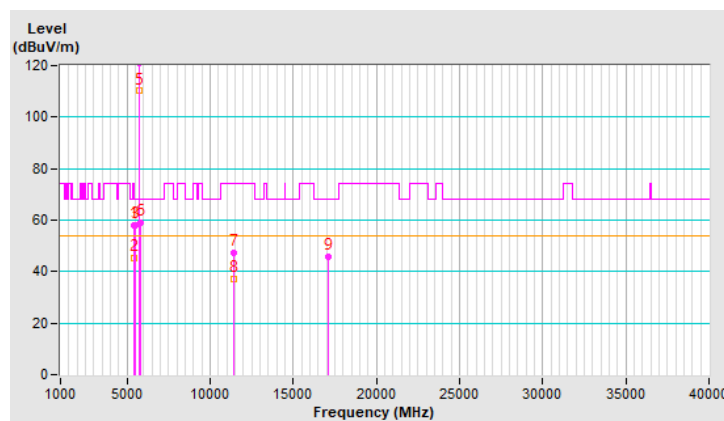


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA
基本波頻率：	CH 151 : 5755 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5755.00	112.6 PK			1.23 H	316	108.8	3.8
2	*5755.00	102.7 AV			1.23 H	316	98.9	3.8
3	11510.00	47.6 PK	74.0	-26.4	1.45 H	217	33.8	13.8
4	11510.00	37.3 AV	54.0	-16.7	1.45 H	217	23.5	13.8
5	#17265.00	45.3 PK	68.2	-22.9	1.49 H	143	28.7	16.6
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

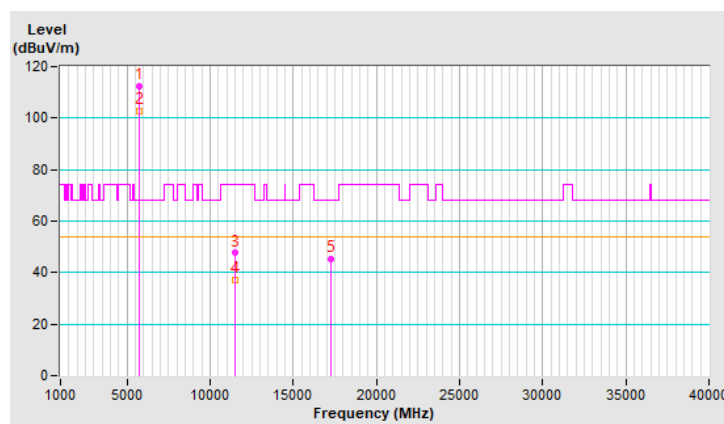


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA
基本波頻率：	CH 151 : 5755 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5755.00	120.8 PK			1.59 V	334	117.0	3.8
2	*5755.00	109.7 AV			1.59 V	334	105.9	3.8
3	11510.00	47.9 PK	74.0	-26.1	1.49 V	210	34.1	13.8
4	11510.00	38.0 AV	54.0	-16.0	1.49 V	210	24.2	13.8
5	#17265.00	46.3 PK	68.2	-21.9	1.50 V	128	29.7	16.6
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

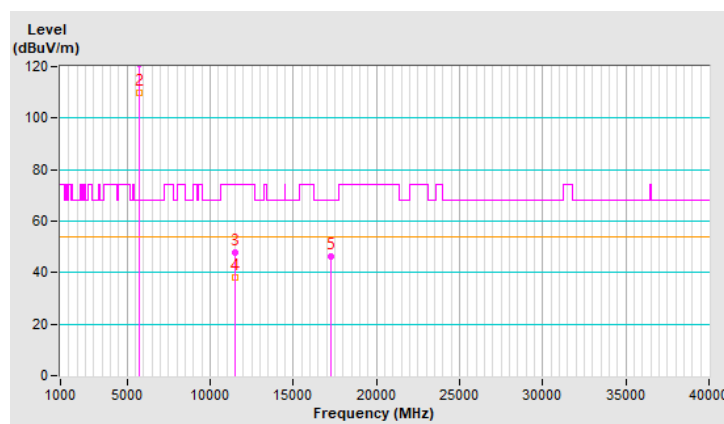


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA
基本波頻率：	CH 159 : 5795 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5795.00	113.8 PK			1.24 H	317	109.9	3.9
2	*5795.00	103.2 AV			1.24 H	317	99.3	3.9
3	11590.00	47.8 PK	74.0	-26.2	1.48 H	220	34.2	13.6
4	11590.00	37.6 AV	54.0	-16.4	1.48 H	220	24.0	13.6
5	#17385.00	46.0 PK	68.2	-22.2	1.48 H	149	28.6	17.4
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

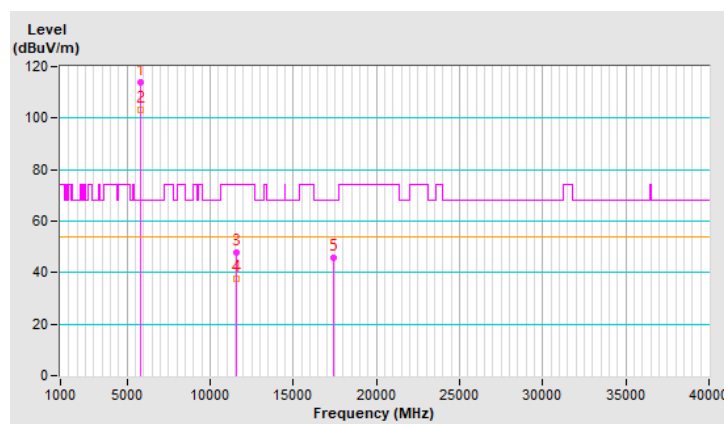


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA
基本波頻率：	CH 159 : 5795 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5795.00	120.5 PK			1.59 V	360	116.6	3.9
2	*5795.00	109.4 AV			1.59 V	360	105.5	3.9
3	11590.00	47.1 PK	74.0	-26.9	1.51 V	215	33.5	13.6
4	11590.00	37.1 AV	54.0	-16.9	1.51 V	215	23.5	13.6
5	#17385.00	45.9 PK	68.2	-22.3	1.49 V	132	28.5	17.4
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

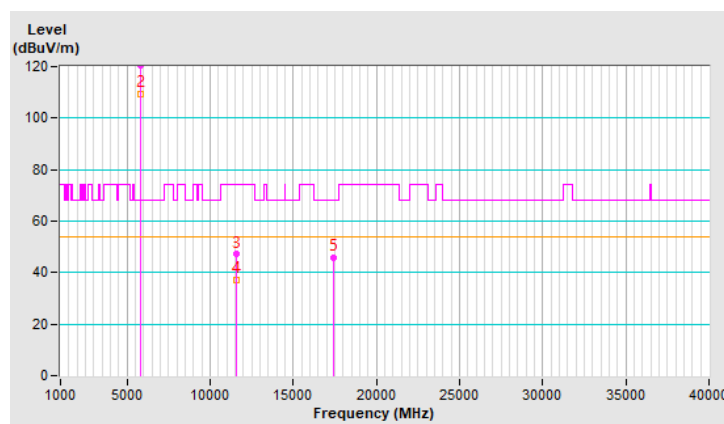


操作模式：	發射 802.11ax (HE80)	調變技術：	OFDMA
基本波頻率：	CH 42 : 5210 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.9 PK	74.0	-22.1	1.15 H	356	48.9	3.0
2	5150.00	41.3 AV	54.0	-12.7	1.15 H	356	38.3	3.0
3	*5210.00	100.8 PK			1.15 H	356	97.8	3.0
4	*5210.00	90.1 AV			1.15 H	356	87.1	3.0
5	5350.00	49.9 PK	74.0	-24.1	1.15 H	356	46.9	3.0
6	5350.00	37.9 AV	54.0	-16.1	1.15 H	356	34.9	3.0
7	#10420.00	47.2 PK	68.2	-21.0	1.48 H	202	33.9	13.3
8	15630.00	45.4 PK	74.0	-28.6	1.47 H	132	31.7	13.7
9	15630.00	35.7 AV	54.0	-18.3	1.47 H	132	22.0	13.7
10	20840.00	-	-	-	-	-	-	-
11	#26050.00	-	-	-	-	-	-	-
12	31260.00	-	-	-	-	-	-	-
13	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

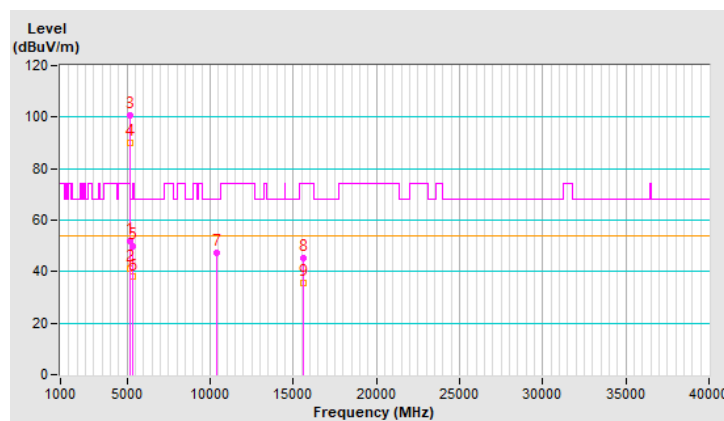


操作模式：	發射 802.11ax (HE80)	調變技術：	OFDMA
基本波頻率：	CH 42 : 5210 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.4 PK	74.0	-9.6	1.80 V	17	61.4	3.0
2	5150.00	53.7 AV	54.0	-0.3	1.80 V	17	50.7	3.0
3	*5210.00	111.3 PK			1.80 V	17	108.3	3.0
4	*5210.00	100.2 AV			1.80 V	17	97.2	3.0
5	5350.00	54.4 PK	74.0	-19.6	1.80 V	17	51.4	3.0
6	5350.00	43.1 AV	54.0	-10.9	1.80 V	17	40.1	3.0
7	#10420.00	48.4 PK	68.2	-19.8	1.54 V	215	35.1	13.3
8	15630.00	45.4 PK	74.0	-28.6	1.45 V	142	31.7	13.7
9	15630.00	35.9 AV	54.0	-18.1	1.45 V	142	22.2	13.7
10	20840.00	-	-	-	-	-	-	-
11	#26050.00	-	-	-	-	-	-	-
12	31260.00	-	-	-	-	-	-	-
13	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

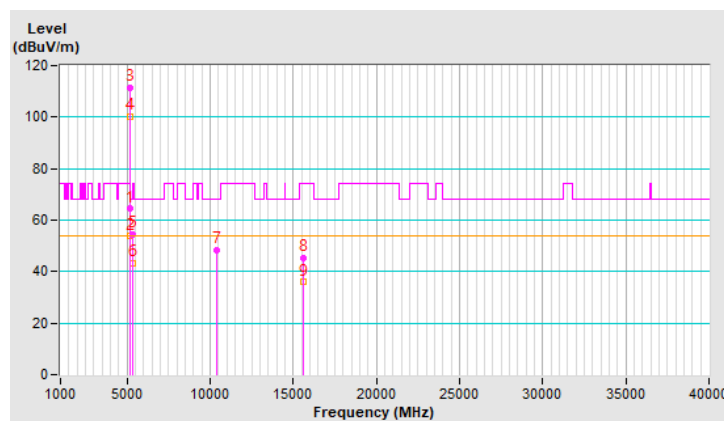


操作模式：	發射 802.11ax (HE80)	調變技術：	OFDMA
基本波頻率：	CH 58 : 5290 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.4 PK	74.0	-23.6	1.31 H	353	47.4	3.0
2	5150.00	38.9 AV	54.0	-15.1	1.31 H	353	35.9	3.0
3	*5290.00	103.5 PK			1.31 H	353	100.6	2.9
4	*5290.00	91.9 AV			1.31 H	353	89.0	2.9
5	5350.00	52.4 PK	74.0	-21.6	1.31 H	353	49.4	3.0
6	5350.00	41.7 AV	54.0	-12.3	1.31 H	353	38.7	3.0
7	#10580.00	48.0 PK	68.2	-20.2	1.55 H	224	34.7	13.3
8	15870.00	45.8 PK	74.0	-28.2	1.48 H	145	32.7	13.1
9	15870.00	36.0 AV	54.0	-18.0	1.48 H	145	22.9	13.1
10	21160.00	-	-	-	-	-	-	-
11	#26450.00	-	-	-	-	-	-	-
12	31740.00	-	-	-	-	-	-	-
13	#37030.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

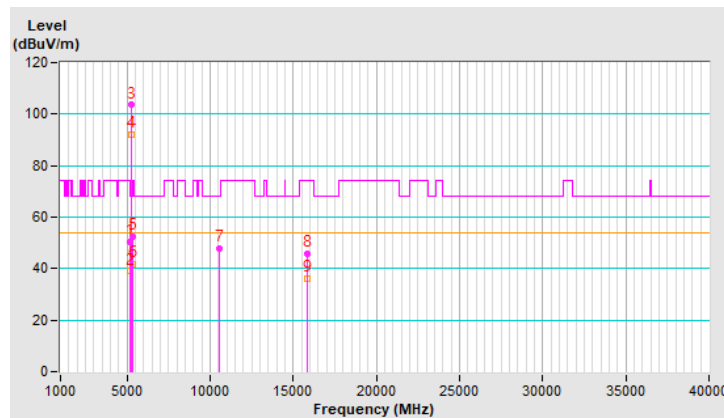


操作模式：	發射 802.11ax (HE80)	調變技術：	OFDMA
基本波頻率：	CH 58 : 5290 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0℃	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.2 PK	74.0	-17.8	1.79 V	18	53.2	3.0
2	5150.00	45.0 AV	54.0	-9.0	1.79 V	18	42.0	3.0
3	*5290.00	112.3 PK			1.79 V	18	109.4	2.9
4	*5290.00	101.0 AV			1.79 V	18	98.1	2.9
5	5350.00	65.3 PK	74.0	-8.7	1.79 V	18	62.3	3.0
6	5350.00	53.6 AV	54.0	-0.4	1.79 V	18	50.6	3.0
7	#10580.00	46.9 PK	68.2	-21.3	1.50 V	216	33.6	13.3
8	15870.00	45.7 PK	74.0	-28.3	1.54 V	128	32.6	13.1
9	15870.00	35.9 AV	54.0	-18.1	1.54 V	128	22.8	13.1
10	21160.00	-	-	-	-	-	-	-
11	#26450.00	-	-	-	-	-	-	-
12	31740.00	-	-	-	-	-	-	-
13	#37030.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

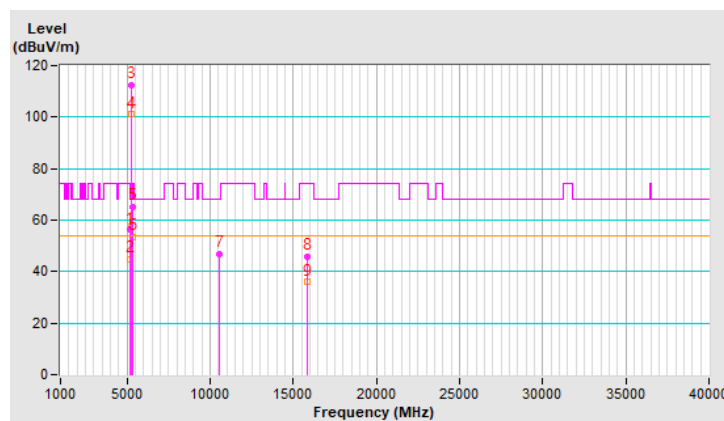


操作模式：	發射 802.11ax (HE80)	調變技術：	OFDMA
基本波頻率：	CH 106 : 5530 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0℃	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5457.46	57.3 PK	74.0	-16.7	1.00 H	354	54.1	3.2
2	5457.46	44.6 AV	54.0	-9.4	1.00 H	354	41.4	3.2
3	#5466.94	58.6 PK	68.2	-9.6	1.00 H	354	55.4	3.2
4	*5530.00	104.1 PK			1.00 H	354	100.8	3.3
5	*5530.00	93.0 AV			1.00 H	354	89.7	3.3
6	#5747.94	51.4 PK	68.2	-16.8	1.00 H	354	47.6	3.8
7	11060.00	47.2 PK	74.0	-26.8	1.53 H	206	33.6	13.6
8	11060.00	37.5 AV	54.0	-16.5	1.53 H	206	23.9	13.6
9	#16590.00	45.9 PK	68.2	-22.3	1.55 H	146	29.6	16.3
10	22120.00	-	-	-	-	-	-	-
11	#27650.00	-	-	-	-	-	-	-
12	#33180.00	-	-	-	-	-	-	-
13	38710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

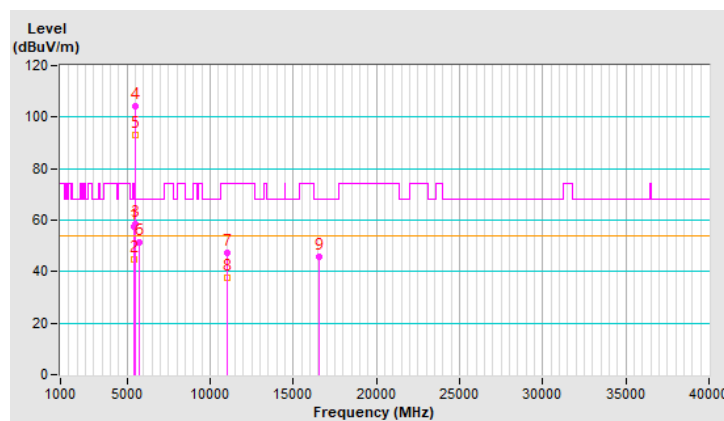


操作模式：	發射 802.11ax (HE80)	調變技術：	OFDMA
基本波頻率：	CH 106 : 5530 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0℃	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5457.61	65.6 PK	74.0	-8.4	1.50 V	355	62.4	3.2
2	5457.61	52.6 AV	54.0	-1.4	1.50 V	355	49.4	3.2
3	#5463.23	67.2 PK	68.2	-1.0	1.50 V	355	64.0	3.2
4	*5530.00	111.9 PK			1.50 V	355	108.6	3.3
5	*5530.00	100.1 AV			1.50 V	355	96.8	3.3
6	#5725.00	54.8 PK	68.2	-13.4	1.50 V	355	51.0	3.8
7	11060.00	47.1 PK	74.0	-26.9	1.50 V	218	33.5	13.6
8	11060.00	37.2 AV	54.0	-16.8	1.50 V	218	23.6	13.6
9	#16590.00	46.1 PK	68.2	-22.1	1.52 V	148	29.8	16.3
10	22120.00	-	-	-	-	-	-	-
11	#27650.00	-	-	-	-	-	-	-
12	#33180.00	-	-	-	-	-	-	-
13	38710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

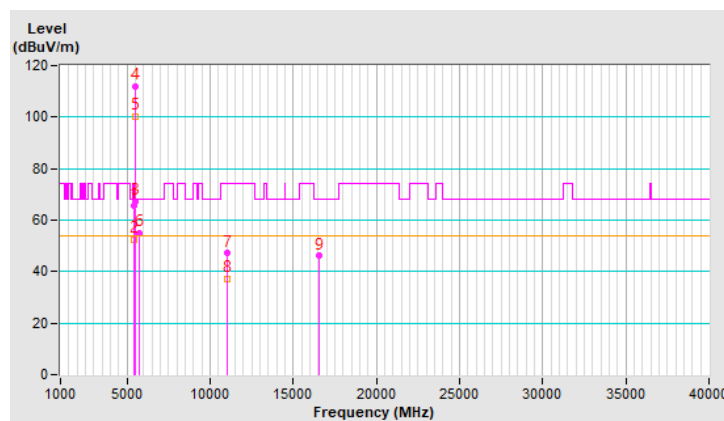


操作模式：	發射 802.11ax (HE80)	調變技術：	OFDMA
基本波頻率：	CH 122 : 5610 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	110.6 PK			1.32 H	356	107.2	3.4
2	*5610.00	100.3 AV			1.32 H	356	96.9	3.4
3	#5725.00	58.9 PK	68.2	-9.3	1.32 H	356	55.1	3.8
4	11220.00	46.8 PK	74.0	-27.2	1.56 H	220	33.4	13.4
5	11220.00	37.1 AV	54.0	-16.9	1.56 H	220	23.7	13.4
6	#16830.00	46.2 PK	68.2	-22.0	1.55 H	148	29.5	16.7
7	22440.00	-	-	-	-	-	-	-
8	#28050.00	-	-	-	-	-	-	-
9	#33660.00	-	-	-	-	-	-	-
10	39270.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

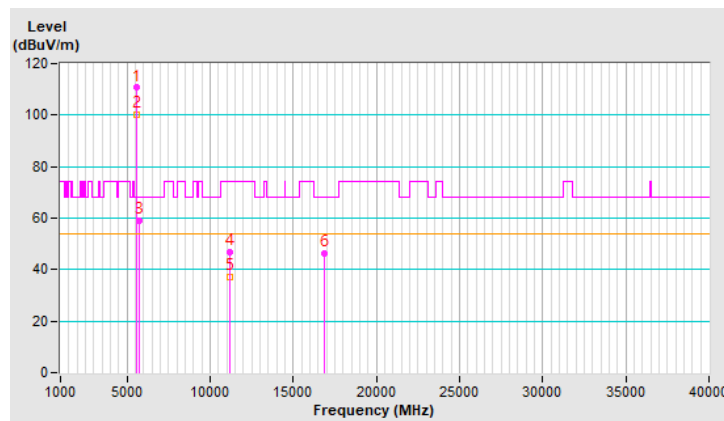


操作模式：	發射 802.11ax (HE80)	調變技術：	OFDMA
基本波頻率：	CH 122 : 5610 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	117.8 PK			1.51 V	351	114.4	3.4
2	*5610.00	107.6 AV			1.51 V	351	104.2	3.4
3	#5725.00	65.8 PK	68.2	-2.4	1.51 V	351	62.0	3.8
4	11220.00	47.6 PK	74.0	-26.4	1.45 V	216	34.2	13.4
5	11220.00	37.9 AV	54.0	-16.1	1.45 V	216	24.5	13.4
6	#16830.00	45.4 PK	68.2	-22.8	1.47 V	142	28.7	16.7
7	22440.00	-	-	-	-	-	-	-
8	#28050.00	-	-	-	-	-	-	-
9	#33660.00	-	-	-	-	-	-	-
10	39270.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

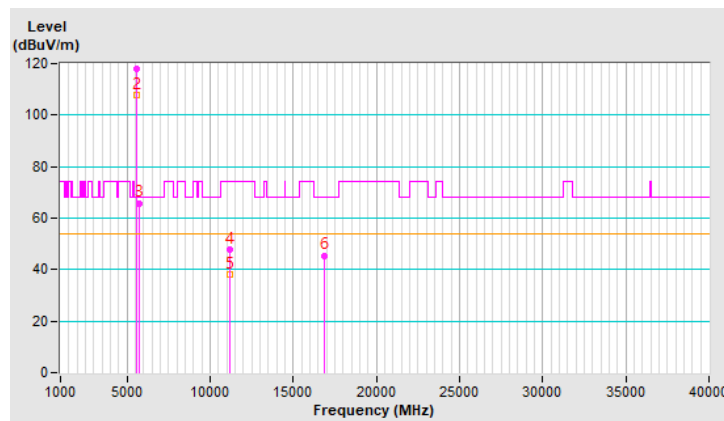


操作模式：	發射 802.11ax (HE80)	調變技術：	OFDMA
基本波頻率：	CH 138 : 5690 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	53.6 PK	74.0	-20.4	1.34 H	356	50.4	3.2
2	5460.00	41.2 AV	54.0	-12.8	1.34 H	356	38.0	3.2
3	#5470.00	56.7 PK	68.2	-11.5	1.34 H	356	53.5	3.2
4	*5690.00	110.5 PK			1.34 H	356	106.7	3.8
5	*5690.00	100.1 AV			1.34 H	356	96.3	3.8
6	#5850.00	56.6 PK	68.2	-11.6	1.34 H	356	52.4	4.2
7	11380.00	47.6 PK	74.0	-26.4	1.51 H	209	33.5	14.1
8	11380.00	37.6 AV	54.0	-16.4	1.51 H	209	23.5	14.1
9	#17070.00	46.0 PK	68.2	-22.2	1.49 H	135	28.4	17.6
10	22760.00	-	-	-	-	-	-	-
11	#28450.00	-	-	-	-	-	-	-
12	#34140.00	-	-	-	-	-	-	-
13	39830.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

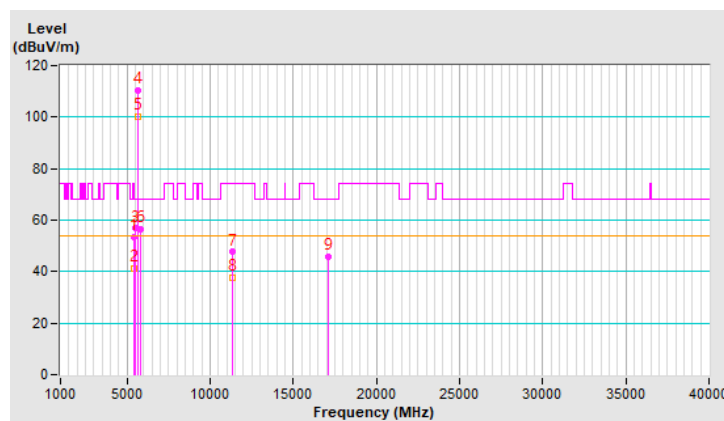


操作模式：	發射 802.11ax (HE80)	調變技術：	OFDMA
基本波頻率：	CH 138 : 5690 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 7 月 31 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.8 PK	74.0	-16.2	1.49 V	358	54.6	3.2
2	5460.00	45.2 AV	54.0	-8.8	1.49 V	358	42.0	3.2
3	#5470.00	58.3 PK	68.2	-9.9	1.49 V	358	55.1	3.2
4	*5690.00	117.9 PK			1.49 V	358	114.1	3.8
5	*5690.00	107.9 AV			1.49 V	358	104.1	3.8
6	#5850.00	57.2 PK	68.2	-11.0	1.49 V	358	53.0	4.2
7	11380.00	48.1 PK	74.0	-25.9	1.45 V	207	34.0	14.1
8	11380.00	37.9 AV	54.0	-16.1	1.45 V	207	23.8	14.1
9	#17070.00	46.3 PK	68.2	-21.9	1.48 V	146	28.7	17.6
10	22760.00	-	-	-	-	-	-	-
11	#28450.00	-	-	-	-	-	-	-
12	#34140.00	-	-	-	-	-	-	-
13	39830.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

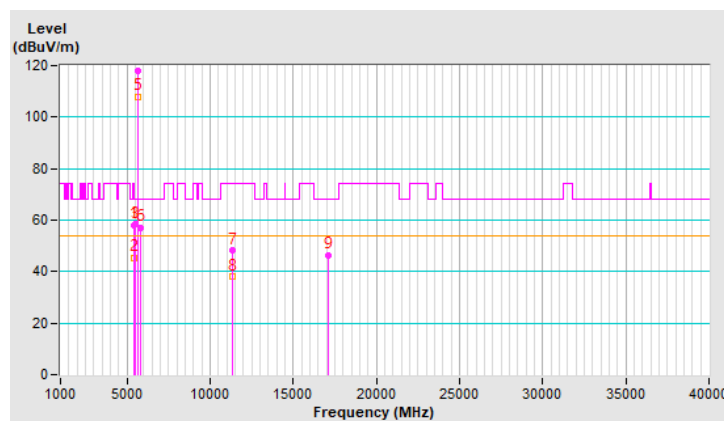


操作模式：	發射 802.11ax (HE80)	調變技術：	OFDMA
基本波頻率：	CH 155 : 5775 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 8 月 1 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5775.00	107.8 PK			1.32 H	315	103.9	3.9
2	*5775.00	97.1 AV			1.32 H	315	93.2	3.9
3	11550.00	48.0 PK	74.0	-26.0	1.53 H	226	34.3	13.7
4	11550.00	37.9 AV	54.0	-16.1	1.53 H	226	24.2	13.7
5	#17325.00	45.4 PK	68.2	-22.8	1.49 H	143	28.6	16.8
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

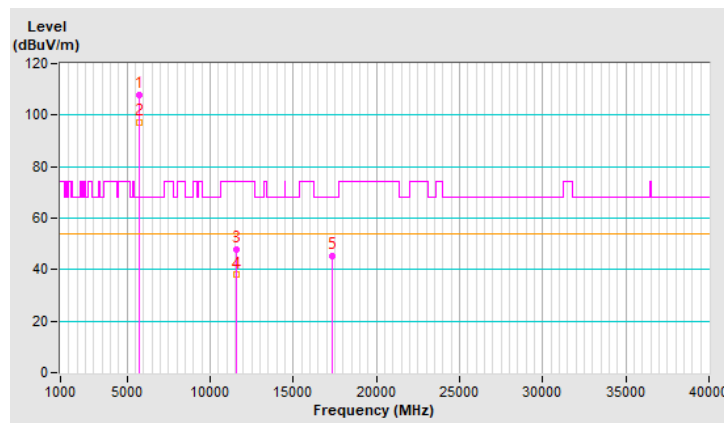

操作模式：	發射 802.11ax (HE80)	調變技術：	OFDMA
基本波頻率：	CH 155 : 5775 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25.0°C	量測場地濕度：	75.0%RH
測試日期：	109 年 8 月 1 日	測試者：	楊立豪

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5775.00	116.5 PK			3.08 V	356	112.6	3.9
2	*5775.00	105.4 AV			3.08 V	356	101.5	3.9
3	11550.00	47.9 PK	74.0	-26.1	1.53 V	217	34.2	13.7
4	11550.00	37.7 AV	54.0	-16.3	1.53 V	217	24.0	13.7
5	#17325.00	45.3 PK	68.2	-22.9	1.47 V	135	28.5	16.8
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

