

TEST REPORT

Report No.: BCTC2507168266-1E

Applicant: Shenzhen Baseus Technology Co., Ltd.

Product Name: Baseus True Wireless Earbuds

Test Model: A00106

Tested Date: 2025-07-18 to 2025-07-28


Issued Date: 2025-07-28

Shenzhen BCTC Testing Co., Ltd.



Product Name: Baseus True Wireless Earbuds
Trademark: baseus
Model/Type reference: A00106
Prepared For: Shenzhen Baseus Technology Co., Ltd.
Address: 2nd Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou Community, Bantian Street, Longgang District, Shenzhen, China.
Manufacturer: Shenzhen Baseus Technology Co., Ltd.
Address: 2nd Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou Community, Bantian Street, Longgang District, Shenzhen, China.
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: 2025-07-18
Sample tested Date: 2025-07-18 to 2025-07-28
Issue Date: 2025-07-28
Report No.: BCTC2507168266-1E
Test Standards: Article 2 paragraph 1 of item 19
MIC Notice No.88 Appendix No.43
Test Results: PASS
Remark: This is JAPAN RADIO test report.

Tested by:



Shanshan. Zhang / Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.


Table Of Content

Test Report Declaration	Page
1. Version	5
2. Test Summary	6
3. Measurement Uncertainty	7
4. Product Information And Test Setup	8
4.1 Product Information.....	8
4.2 Block Diagram Parameters Of Test Software Setting	8
4.3 Description Of Support Units (Conducted Mode)	9
4.4 Channel List	9
4.5 Test Mode	10
4.6 Test Conditions	10
4.7 Table Of Parameters Of Test Software Setting	10
5. Test Facility And Test Instrument Used	11
5.1 Test Facility	11
5.2 Test Instrument Used.....	11
6. RF Shielding Method	12
7. Frequency Error	13
7.1 Block Diagram Of Test Setup.....	13
7.2 Limit	13
7.3 Measuring Instruments And Setting	13
7.4 Test Procedure	13
7.5 Test Result.....	14
8. Antenna Power.....	16
8.1 Block Diagram Of Test Setup.....	16
8.2 Limit	16
8.3 Measuring Instruments And Setting	16
8.4 Test Procedure	16
8.5 Test Result.....	17
9. Occupied Bandwidth	18
9.1 Block Diagram Of Test Setup.....	18
9.2 Limit	18
9.3 Test Procedure	18
9.4 Test Result.....	18
10. Unwanted Emission Intensity Measurement.....	22
10.1 Block Diagram Of Test Setup.....	22
10.2 Limit	22
10.3 Measuring Instruments And Setting	22
10.4 Test Procedure	22
10.5 Test Result.....	23
11. Radio Interference Prevention Capability Measurement	51
11.1 Block Diagram Of Test Setup.....	51
11.2 Limit	51
11.3 Measuring Instruments And Setting	51
11.4 Test Procedure	51

11.5	Test Result.....	51
12.	Dwell Time.....	52
12.1	Block Diagram Of Test Setup.....	52
12.2	Limit	52
12.3	Measuring Instruments And Setting	52
12.4	Test Procedure	52
12.5	Test Result.....	53
13.	Carrier Sense	68
14.	Imitation Of Collateral Emission Of Receiver Measurement.....	69
14.1	Block Diagram Of Test Setup.....	69
14.2	Limit	69
14.3	Measuring Instruments And Setting	69
14.4	Test Procedure	69
14.5	Test Result.....	70
15.	EUT Photographs.....	74
16.	EUT Test Setup Photographs.....	75


(Note: N/A Means Not Applicable)

TE
TC
OVE
t Sea

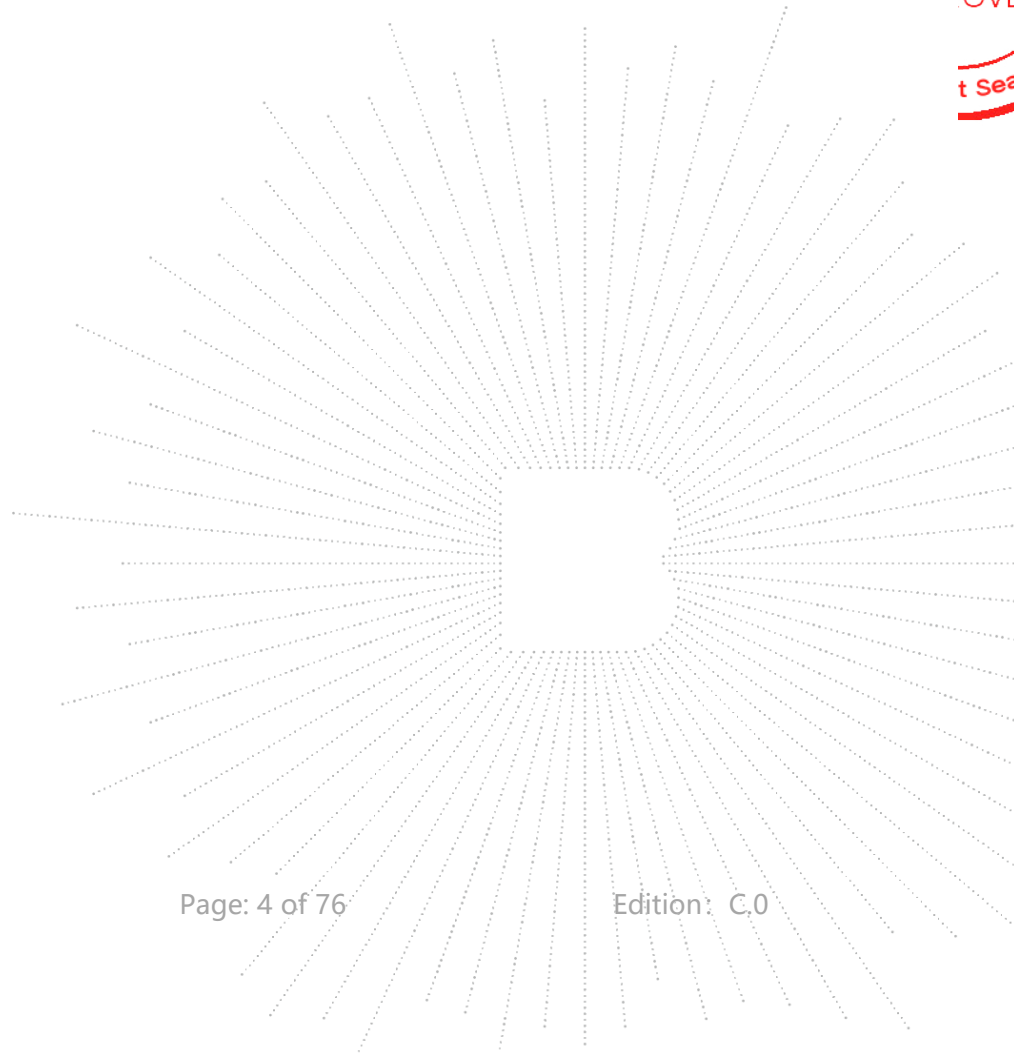

1. Version

Report No.	Issue Date	Description	Approved
BCTC2507168266-1E	2025-07-28	Original	Valid

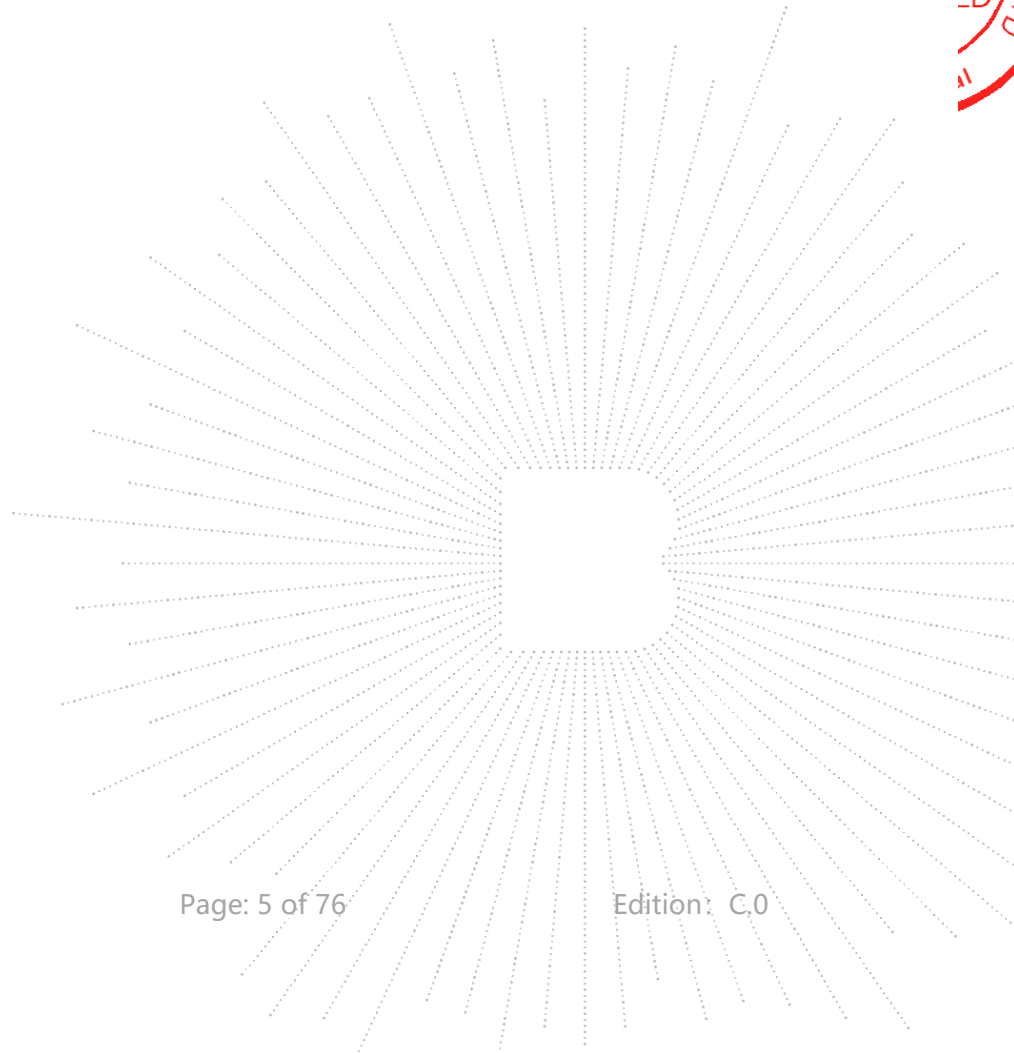

2. Test Summary

Test procedures according to the technical standards:

Article 2 paragraph 1 of item 19			
Standard Section	Test Item	Judgment	Remark
General provisions			
5	Frequency Error	PASS	
6	Occupied Bandwidth	PASS	
7	Spurious Emissions Intensity	PASS	
8	Radio Interference Prevention Capability Measurement	PASS	
Transmitting equipment			
6	Antenna Power	PASS	
Transmitting antenna			
20	Type, Configuration, etc., of Transmitting Antenna	PASS	
22	Direction Pattern of Transmitting Antenna (Provided at Individual Antenna Report)	PASS	
Receiving antenna			
24	Limitation of Collateral Emission of Receiver	PASS	
26	Refer to All Articles for Transmitting Antenna	PASS	
Operating frequency 2400~2483.5MHz			
49.20(1);a	RF Shielding Method	PASS	
49.20(1);a	Communication Method	PASS	
49.20(1);b	Spread-spectrum Method	PASS	
49.20(1);c	Antenna Power	PASS	
49.20(1);d	Absolute Antenna Gain (Provided at Individual Antenna Report)	PASS	
49.20(1);e	Spread-Spectrum Bandwidth	PASS	
49.20(1);f	Spreading Factor	PASS	
49.20(1);g	Hopping Frequency Dwell Time (FH employed)	PASS	


NOTE:

(1) "N/A" denotes test is not applicable in this Test Report.

3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.2\text{dB}$
2	Radiated Emission Test	$\pm 4.7\text{dB}$
3	RF power,conducted	$\pm 0.16\text{dB}$
4	Spurious emissions,conducted	$\pm 0.21\text{dB}$
5	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
6	All emissions,radiated(>1G)	$\pm 5.0\text{dB}$
7	frequency error ppm	$\pm 0.5\text{ppm}$

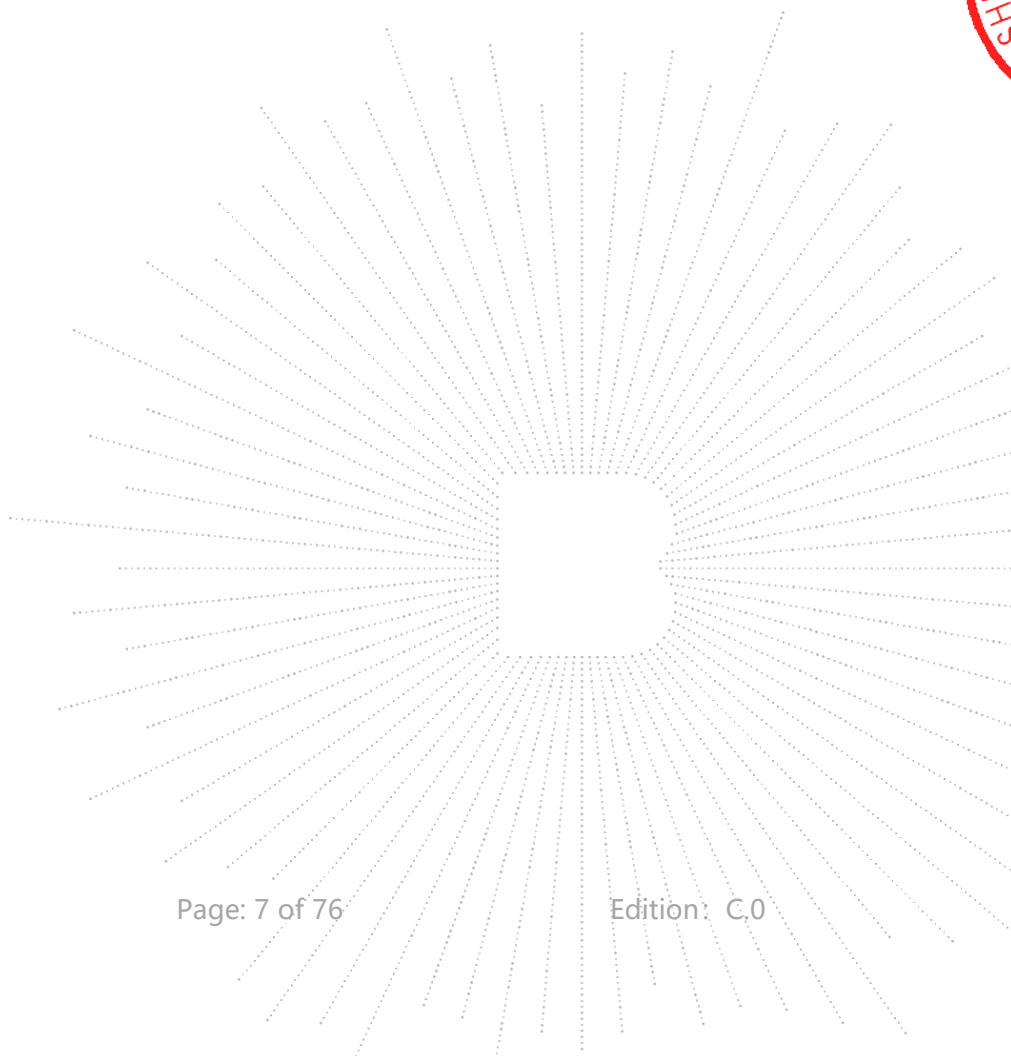

4. Product Information And Test Setup

4.1 Product Information

Model/Type Reference: A00106

Model Differences: N/A

Hardware Version: V1.2

Software Version: V1.1

Operation Frequency: 2402-2480MHz

Type of Modulation: GFSK, $\pi/4$ -DQPSK, 8DPSK

Number Of Channel: 79 CH

Antenna installation: Internal antenna

Antenna Gain: -2.53 dBi


Remark:

☒ The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information.

☐ The antenna gain of the product is provided by the customer, and the test data is affected by the customer information.

Ratings: DC 5V from adapter or DC 3.7V from battery

4.2 Block Digram Parameters Of Text Software Setting

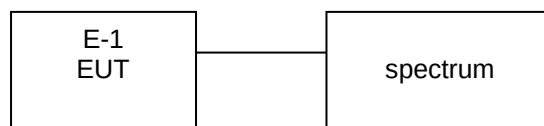

4.3 Description Of Support Units (Conducted Mode)

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Baseus True Wireless Earbuds	baseus	A00106	N/A	EUT

Notes:

1. The support equipment was authorized by Declaration of Confirmation.
2. For detachable type I/O cable should be specified the length in cm in 『Length』 column
3. “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

4.4 Channel List

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For All Mode	Description	Modulation Type
Mode 1	CH 00	GFSK
Mode 2	CH 39	
Mode 3	CH 78	
Mode 4	RX	
Mode 5	CH 00	$\pi/4$ -DQPSK
Mode 6	CH 39	
Mode 7	CH 78	
Mode 8	RX	
Mode 9	CH 00	8DPSK
Mode 10	CH 39	
Mode 11	CH 78	
Mode 12	RX	

4.6 Test Conditions

The EUT module was tested while in a continuous transmitter/receiver mode.

The EUT was tuned to a low, middle, and high channel for all tests. For all test case pre/scans were completed in all Modes to determine worst case levels.

Power Supply Voltage Fluctuation Test

Voltage Fluctuation Test	Normal Voltage	High Voltage +10% of Normal Voltage	Low Voltage -10% of Normal Voltage
Input DC Power	3.7V	4.07V	3.33V
Voltage Variation (%)	0%	+10%	-10%

Note:

Voltage Variation (%)= (Output high or Low Voltage - Output Normal Voltage)/ Output Normal Voltage* 100

During the input supply voltage to the EUT from the external power source is varied by $\pm 10\%$, $\pm 10\%$ of the external power change, will not affect the voltage of the RF RF(DC 3.3V), so only operated in normal voltage to test all regulations.

4.7 Table Of Parameters Of Test Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	bt_tool_v1.1.4		
Frequency	2402 MHz	2441 MHz	2480 MHz
Parameters	DEF	DEF	DEF

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

A2LA certificate registration number is: CN1212

ISED Registered No.: 23583

ISED CAB identifier: CN0017

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1.	Power Metter	Keysight	E4419	\	May 14, 2025	May 13, 2026
2.	Signal Analyzer 20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 14, 2025	May 13, 2026
3.	D.C. Power Supply	LongWei	TPR-6405D	\	May 14, 2025	May 13, 2026
4.	Signal Generator	Keysight	N5182B	MY56200519	May 14, 2025	May 13, 2026
5.	Pulse limiter	Schwarzbeck	VTSD 9561-F	01323	May 14, 2025	May 13, 2026
6.	Hygrothermograph	Thermo	HTC-1	\	May 19, 2025	May 18, 2026


Calibration laboratory: CCIC(Shenzhen) Co., Ltd

6. RF Shielding Method

Chipset:

The product structure is uses SMD patch process.


As shown in the picture, If the will be open so the product be damage.

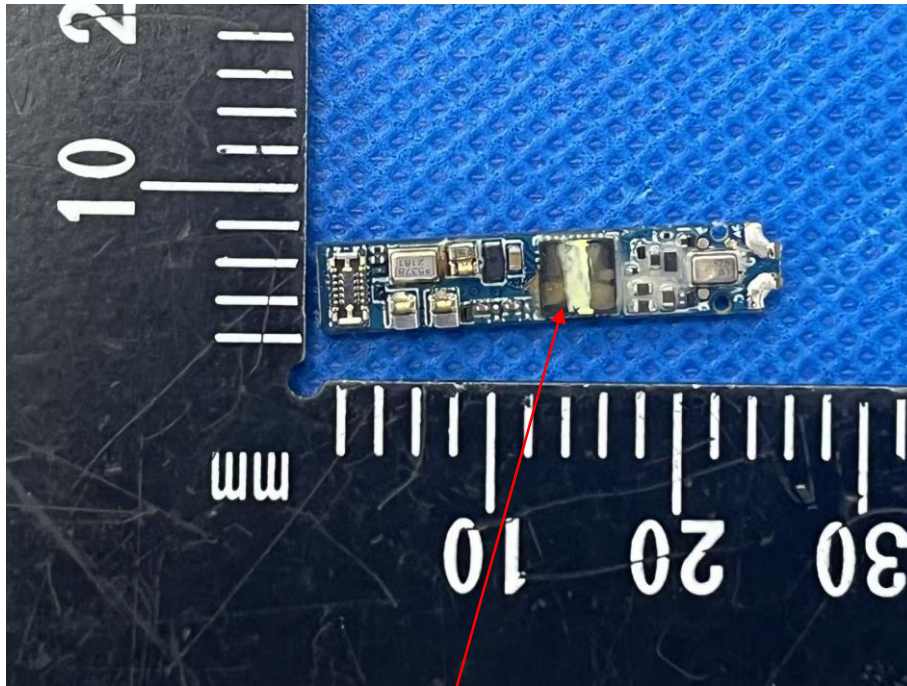

CO., LTD.

7. Frequency Error

7.1 Block Diagram Of Test Setup

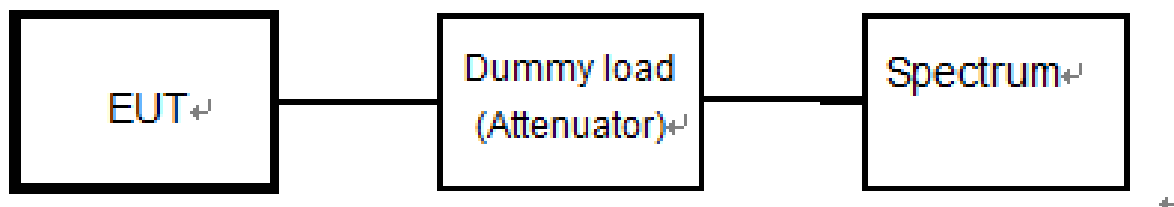

7.2 Limit

Item	Limits
Frequency Error	±50ppm

7.3 Measuring Instruments And Setting

The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
RB / VB	10KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


7.4 Test Procedure



- (1) In the case of unmodulated signal (continuous or continuous burst), measure the frequency directly by a frequency meter.
 - (2) In the case of burst waves, the measurement shall be done for enough time in order to obtain the enough measuring accuracy, and the average of the measured values becomes the final value.
 - (3) In the case of a test mode with a specific frequency spectrum, measure the frequency of the specific spectrum by a spectrum analyzer.
 - (4) In the cases above, if the frequency equivalent to the test frequency is not directly measured in principle, it shall be obtained by necessary calculation.
- In the case of modulated signal, if there is no specific spectrum measurable by a spectrum analyzer but a specific dip is observed, it is allowed to measure the frequency with the signal generator (synthesized). That is, observe a signal of the signal generator concurrently (or alternately) with the tested signal using the spectrum analyzer while setting the frequency of the signal generator to the position of the dip on the screen of the spectrum analyzer, and determine the frequency of the signal generator at the time as a measured value.

7.5 Test Result

Temperature:	26°C		
Humidity:	54 % RH	Test Voltage	DC 3.7V


Condition	Mode	Frequency (MHz)	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	1-DH1	2402	2401.998	-2000	-0.83	50	Pass
NVNT	1-DH1	2441	2440.998	-2000	-0.82	50	Pass
NVNT	1-DH1	2480	2479.998	-2000	-0.81	50	Pass

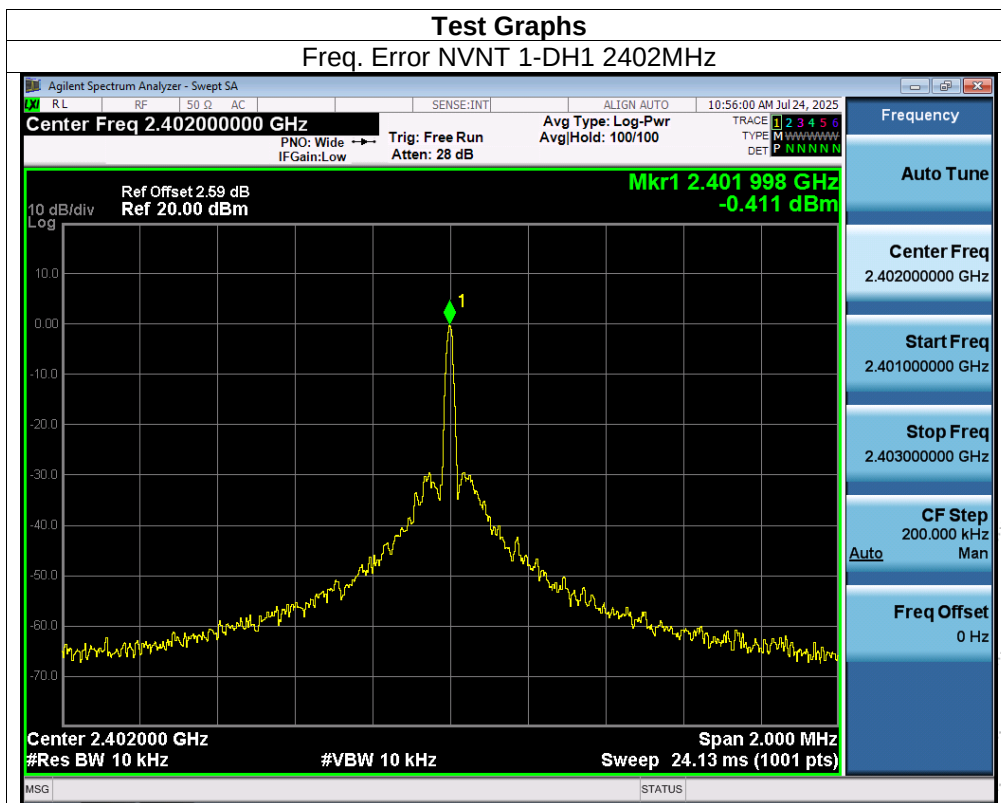

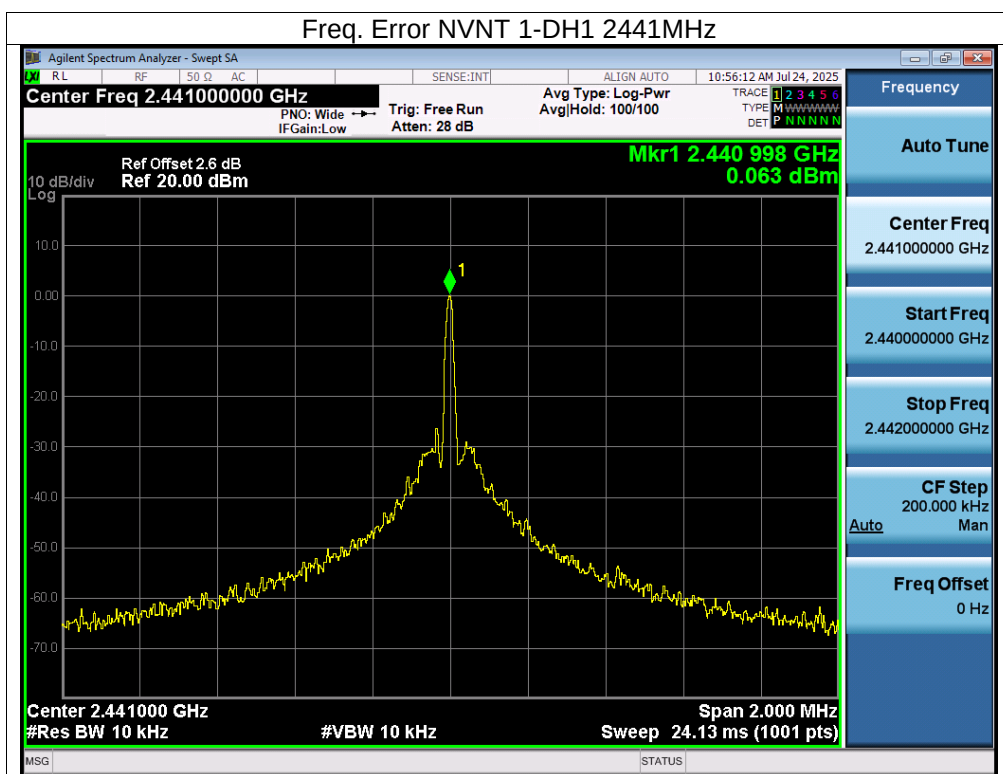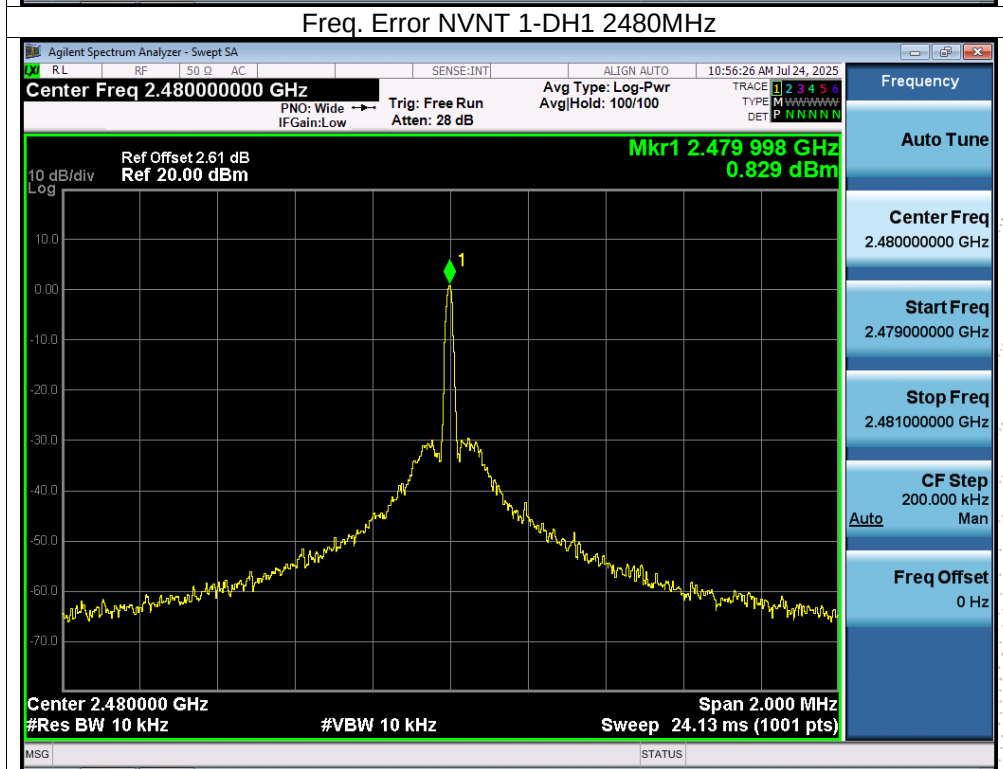

8. Antenna Power

8.1 Block Diagram Of Test Setup

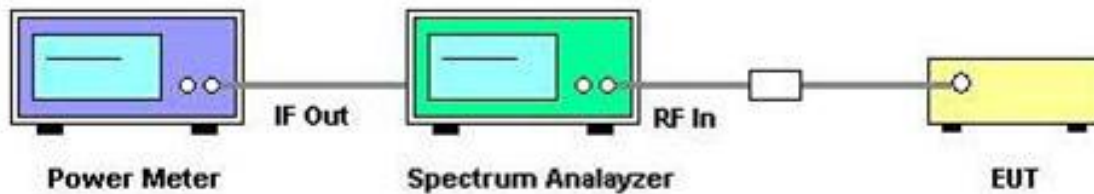

8.2 Limit

Item	Limits
Antenna Power Density	(1) $\leq 3\text{mW/MHz}$ (FH, FH+DS, FH+OFDM form 2400 - 2483.5 MHz) (2) $\leq 10\text{mW/MHz}$ (OFDM OBW < 26MHz, DS, FH other than (1)) (3) $\leq 5\text{mW/MHz}$ (OFDM OBW 26-38MHz) (4) $\leq 10\text{mW/MHz}$ (Other than (1) & (2)& (3))
Antenna Power Error	+20%, -80% (Base on manufacturer declare antenna power density)

8.3 Measuring Instruments And Setting

Please refer to section 5 in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
RB / VB	1 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.4 Test Procedure

1. A power meter is connected on the IF output port of the spectrum analyzer.
2. Adjust the spectrum analyzer to have the center frequency the same with the measured carrier. RBW=VBW=1MHz, detector mode is positive peak. Turn off the averaging function and use zero span.
3. The calibrating signal power shall be reduced to 0 dBm and it shall be verified that the power meter reading also reduces by 10 dB.
4. Connect the equipment to be measured. Using the following settings of the spectrum analyzer in combination with "max hold" function, find the frequency of highest power output in the power envelope: center frequency equal to operating frequency; RBW & VBW: 1 MHz; detector mode: positive peak; averaging: off; span: 3 times the spectrum width; amplitude: adjust for middle of the instrument' range. The frequency found shall be recorded.
5. Set the center frequency of the spectrum analyzer to the found frequency and switch to zero span. The power meter indicates the measured power density "E".
6. Calculate antenna power density by the formula below $PD = P / \text{Spread bandwidth}$.
7. Antenna Power Error is definition that actual measure antenna power tolerance between + 20% to - 80% power range that base on manufacturer declare the conducted power density.


8.5 Test Result

Temperature:	26°C		
Humidity:	54 % RH	Test Voltage	DC 3.7V
Test Mode:	1-DH1, 2-DH1, 3-DH1		

Condition	Conducted RF output power (dBm)	Conducted RF output power (mW)	90% Hopping Occupied bandwidth (MHz)	Conducted RF output power density (mW/MHz)	Rated power density (mW/MHz)	Limit (mW/MHz)	Antenna Power Error (%)	Verdict
NVNT	0.81	1.21	72.061	0.017	0.020	3	-16	Pass
NVNT	-2.10	0.62	72.042	0.009	0.020	3	-57	Pass
NVNT	-2.09	0.62	71.853	0.009	0.020	3	-57	Pass


Limit: +20%, -80% (Base on manufacturer declare antenna power density)

Conducted RF output power density=Antenna Power/ 90%Hopping Occupied bandwidth

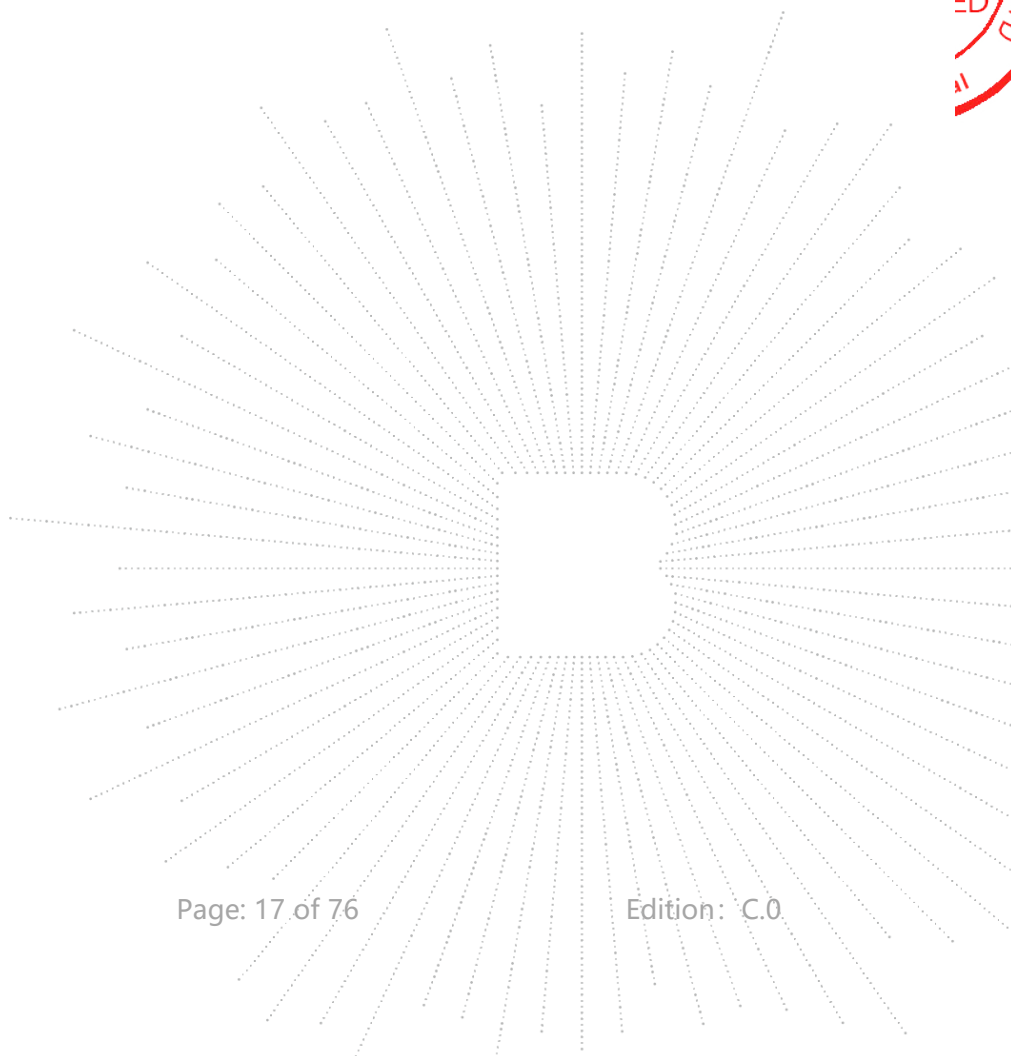

9. Occupied Bandwidth

9.1 Block Diagram Of Test Setup

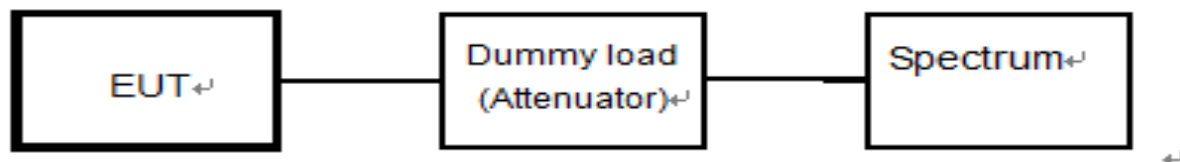

9.2 Limit

Item	Limits
Occupied Band Width:	FH 83.5MHz; OFDM,DS $\leq$ 26MHz;Others $\leq$ 26MHz
Spreading Bandwidth:	$\geq$ 500 kHz (FH, DS)
Spreading Factor	$\geq$ 5

9.3 Test Procedure

- Setting of SA is following as: RB: 1MHz / VB:1MHz / SPAN: 120MHz / AT: 20dB Ref: 10dBm / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold
- EUT have transmitted the maximum modulation signal and fixed channelize (For DSSS or OFDM Device) or continuous maximum power of hopping mode(For FHSS Device). SA set to 99% of occupied bandwidth to measure occupied bandwidth. The limit is less than 26MHz(For DSSS or OFDM Device) or 83.5MHz(For FHSS Device).
- SA set to 90% of occupied bandwidth to measure Spread Spectrum Bandwidth and must greater than 500kHz.
- Spread Spectrum Factor = Spread Spectrum Bandwidth / modulation rate of EUT.
- Spread Spectrum Factor limit is greater than 5


9.4 Test Result



Temperature:	26°C		
Humidity:	54 % RH	Test Voltage	DC 3.7V



Condition	Mode	99% OBW (MHz)	90% OBW (MHz)	Spreading Factor	Verdict
NVNT	1-DH1	78.815	72.061	72.061	Pass
NVNT	2-DH1	78.789	72.042	36.021	Pass
NVNT	3-DH1	78.769	71.853	23.951	Pass

Remark:

- Spreading Factor = (90%Hopping Mode(Occupied bandwidth)) / (transmission rate);
- Transmission Rate=(1-DH1=1Mbps, 2-DH1=2Mbps, 3-DH1=3Mbps)

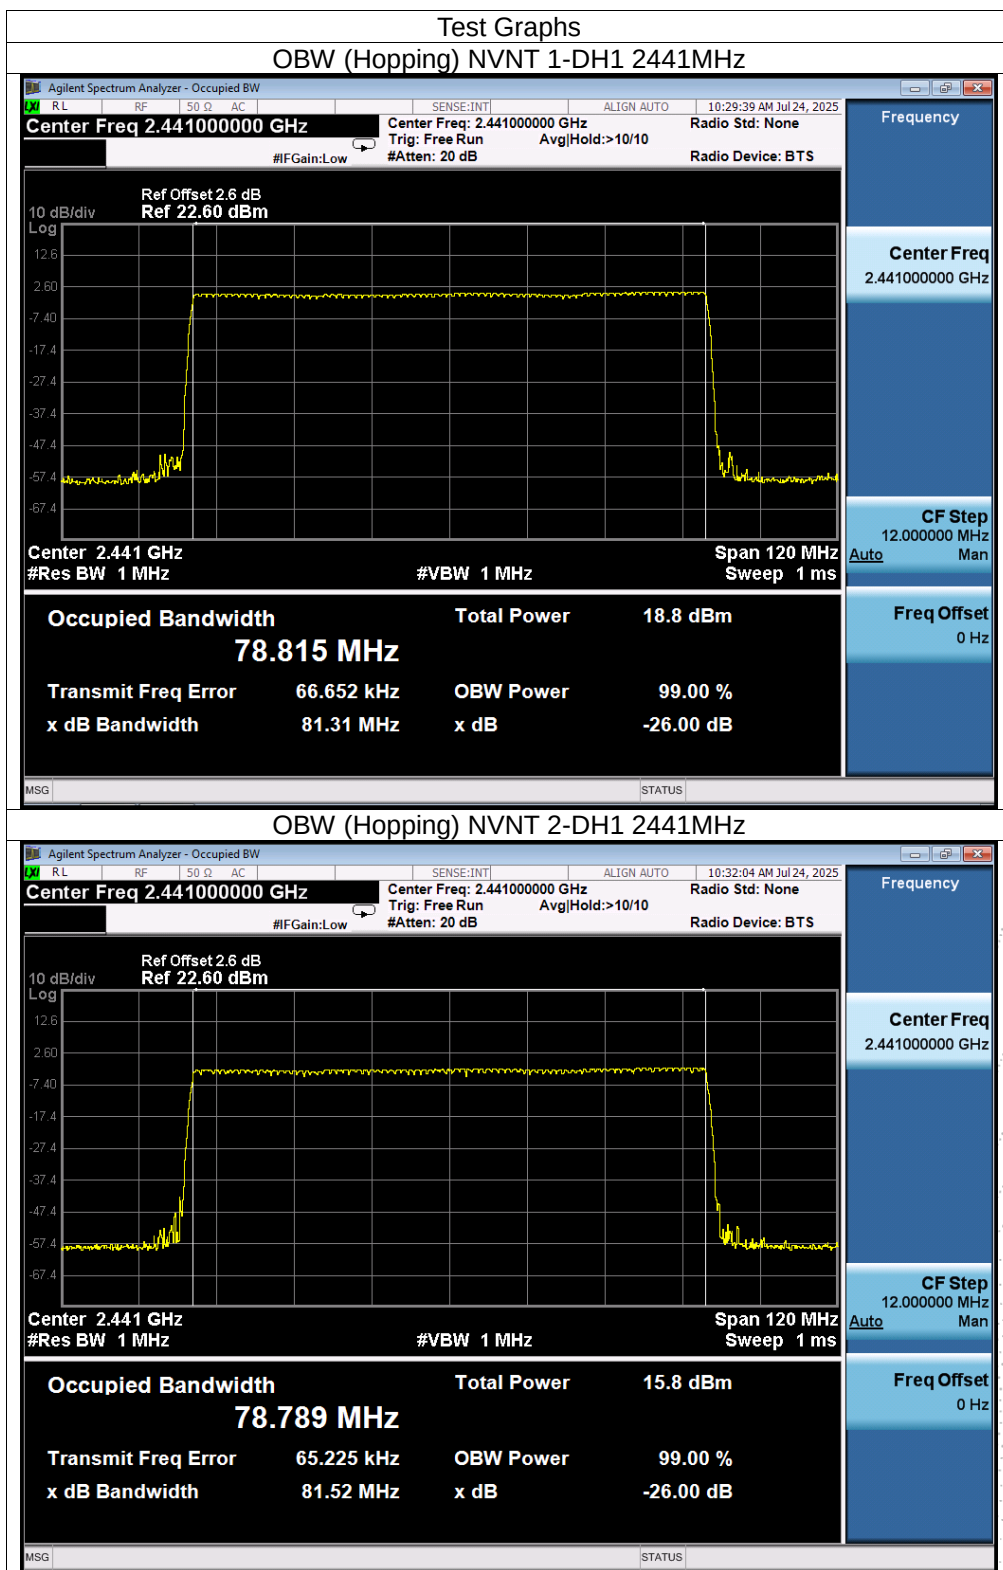


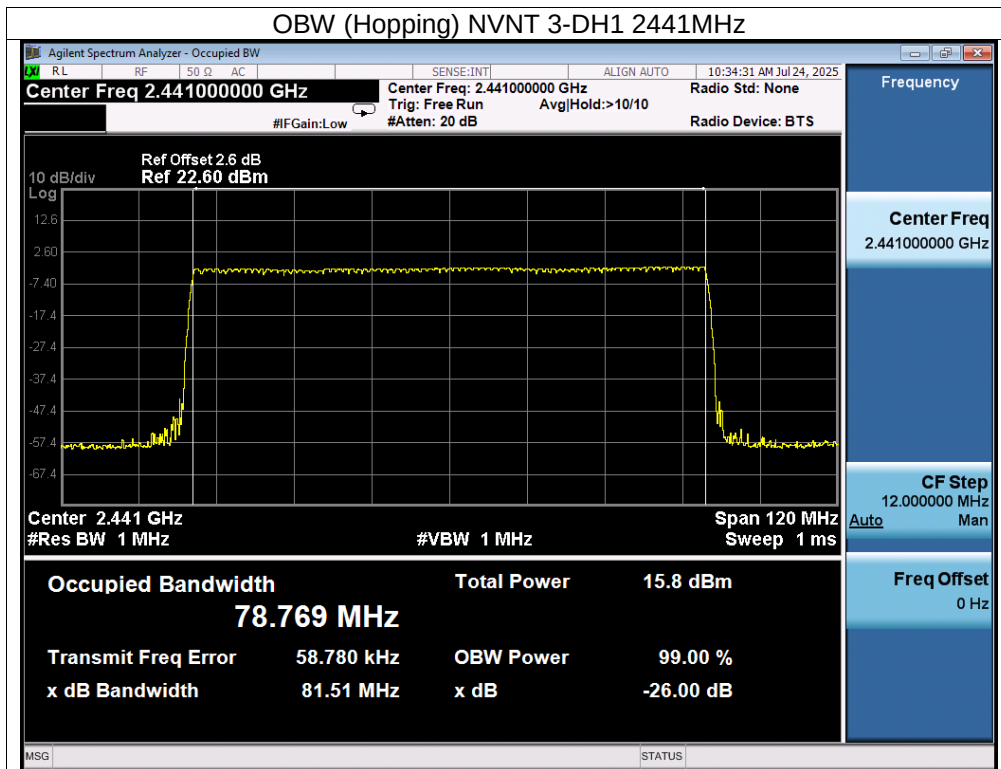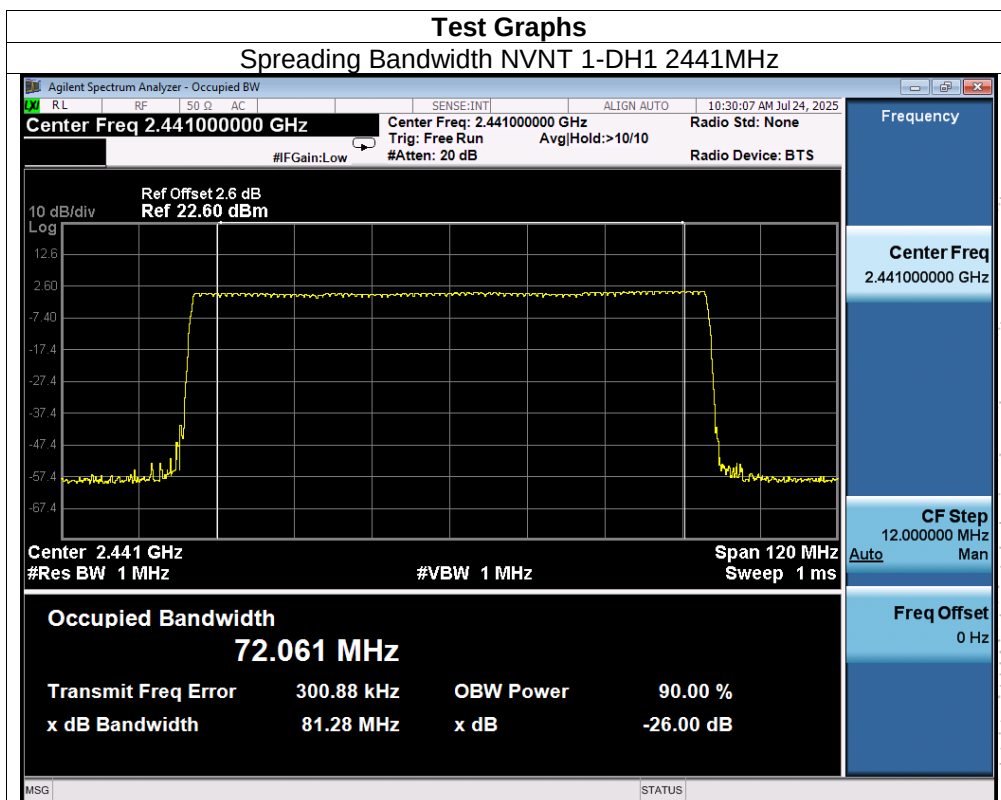

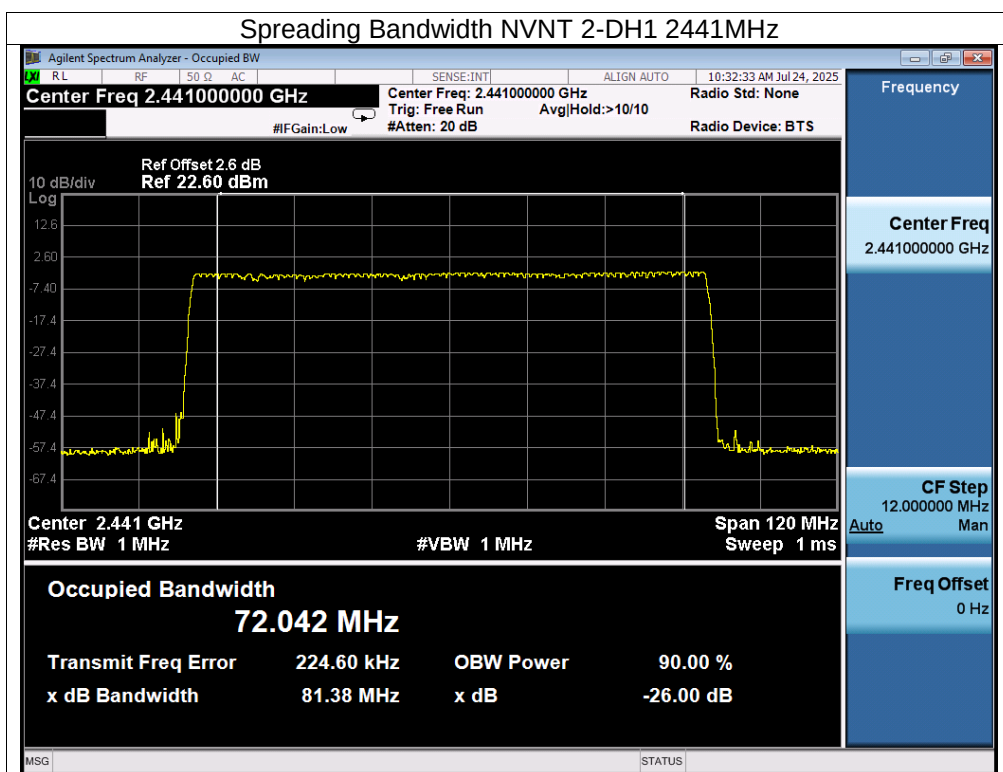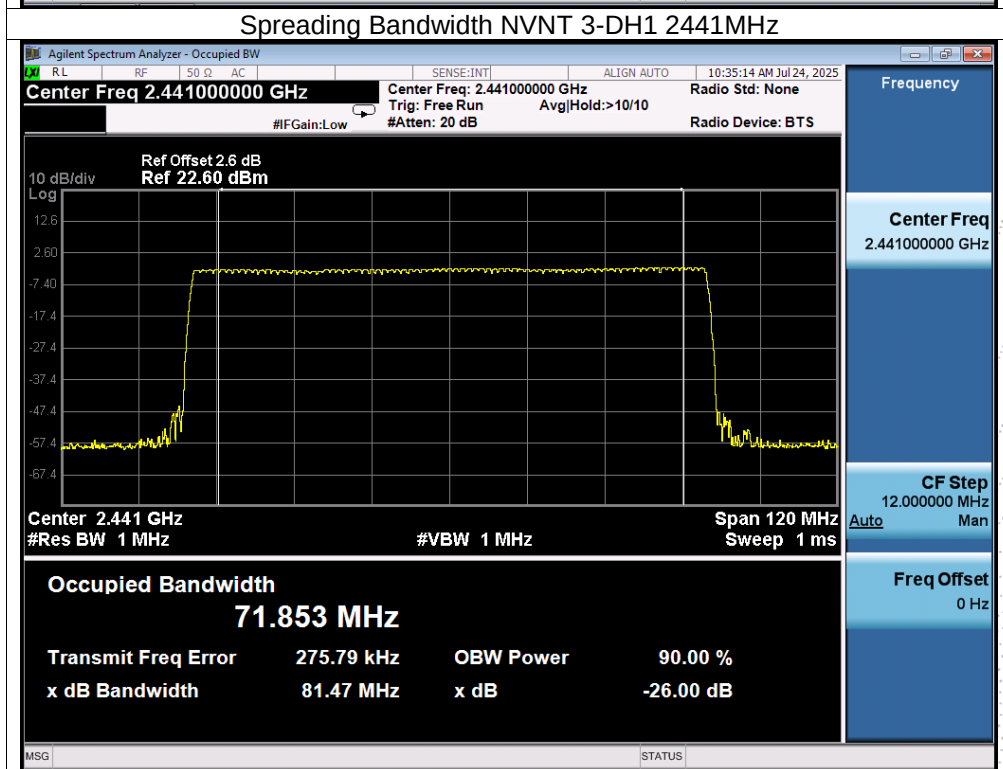

10. Unwanted Emission Intensity Measurement

10.1 Block Diagram Of Test Setup

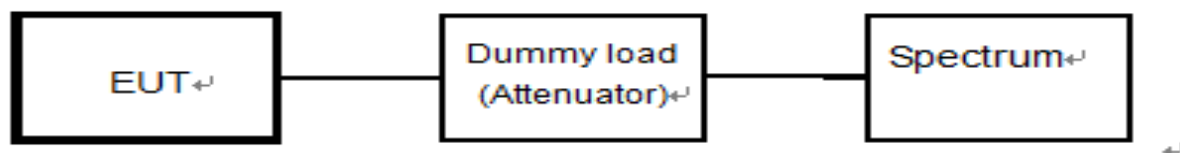

10.2 Limit

Item	RB / VB	Limits
TX Spurious Emission	100KHz	$\leq 0.25 \mu\text{W}$ (-36dBm) ($30\text{MHz} \leq f \leq 1000\text{MHz}$)
	1 MHz	$\leq 2.5 \mu\text{W}$ (-26dBm ($1000\text{MHz} < f \leq 2387\text{MHz}$))
	1 MHz	$\leq 25 \mu\text{W}$ (-16dBm ($2387\text{MHz} < f \leq 2400\text{MHz}$))
	1 MHz	$\leq 25 \mu\text{W}$ (-16dBm ($2483.5\text{MHz} \leq f < 2496.5\text{MHz}$))
	1 MHz	$\leq 2.5 \mu\text{W}$ (-26dBm ($2496.5\text{MHz} \leq f < 12500\text{MHz}$))

10.3 Measuring Instruments And Setting

Please refer to section 5 in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
RB / VB	1 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


10.4 Test Procedure



- EUT have transmitted the maximum modulation signal and fixed channelize.
- Setting of SA is following as: Below 1GHz RB:100KHz / VB:100KHz
Above 1GHz RB:1MHz / VB:1MHz / AT: 20dB Ref: 10dBm / Sweep time: Auto
Sweep Mode: Continuous sweep / Detect mode: Positive peak
Trace mode: Max hold
- Setting of SA is following as 30MHz and stop frequency 1000MHz Then to mark peak reading value + cable loss shall be less than 0.25 μW .
- Setting of SA is following as 1000MHz and stop frequency 2387MHz Then to mark peak reading value + cable loss shall be less than 2.5 μW .
- SA adjusted to start frequency 2387MHz and stop frequency 2400MHz. Then to mark peak reading value + cable loss shall be less than 25 μW .
- SA adjusted to start frequency 2483.5MHz and stop frequency 2496.5MHz Then to mark peak reading value + cable loss shall be less than 25 μW
- SA adjusted to start frequency 2496.5MHz and stop frequency 12500MHz Then to mark peak reading value + cable loss shall be less than 2.5 μW

10.5 Test Result



Temperature:	26°C		
Humidity:	54 % RH	Test Voltage	DC 3.7V
Test Mode:	No-hopping		



Condition	Mode	Frequency (MHz)	Range (MHz)	Emission Frequency (MHz)	Max Value (dBm)	Limit Start(dBm)	Limit Stop (dBm)	Verdict
NVNT	1-DH1	2402	30-1000	894.27	-66.86	-36	-36	Pass
NVNT	1-DH1	2402	1000-2387	2357.87	-56.38	-26	-26	Pass
NVNT	1-DH1	2402	2387-2400	2400	-40.22	-16	-16	Pass
NVNT	1-DH1	2402	2483.5-2496.5	2492.08	-56.56	-16	-16	Pass
NVNT	1-DH1	2402	2496.5-13000	4807.27	-30.89	-26	-26	Pass
NVNT	1-DH1	2441	30-1000	874.87	-67.34	-36	-36	Pass
NVNT	1-DH1	2441	1000-2387	2245.53	-57.22	-26	-26	Pass
NVNT	1-DH1	2441	2387-2400	2393.11	-57.86	-16	-16	Pass
NVNT	1-DH1	2441	2483.5-2496.5	2494.89	-57.08	-16	-16	Pass
NVNT	1-DH1	2441	2496.5-13000	4880.79	-28.74	-26	-26	Pass
NVNT	1-DH1	2480	30-1000	777.87	-66.95	-36	-36	Pass
NVNT	1-DH1	2480	1000-2387	2120.7	-57.03	-26	-26	Pass
NVNT	1-DH1	2480	2387-2400	2391.77	-57.3	-16	-16	Pass
NVNT	1-DH1	2480	2483.5-2496.5	2483.63	-48.37	-16	-16	Pass
NVNT	1-DH1	2480	2496.5-13000	4964.82	-27.44	-26	-26	Pass
NVNT	2-DH1	2402	30-1000	950.53	-67.05	-36	-36	Pass
NVNT	2-DH1	2402	1000-2387	2303.78	-57.12	-26	-26	Pass
NVNT	2-DH1	2402	2387-2400	2399.95	-39.91	-16	-16	Pass
NVNT	2-DH1	2402	2483.5-2496.5	2494.08	-57.46	-16	-16	Pass
NVNT	2-DH1	2402	2496.5-13000	4807.27	-31.04	-26	-26	Pass
NVNT	2-DH1	2441	30-1000	864.2	-66.76	-36	-36	Pass
NVNT	2-DH1	2441	1000-2387	2373.13	-57.39	-26	-26	Pass
NVNT	2-DH1	2441	2387-2400	2395.2	-57.55	-16	-16	Pass
NVNT	2-DH1	2441	2483.5-2496.5	2496.41	-54.84	-16	-16	Pass
NVNT	2-DH1	2441	2496.5-13000	4880.79	-34.17	-26	-26	Pass
NVNT	2-DH1	2480	30-1000	965.08	-66.99	-36	-36	Pass
NVNT	2-DH1	2480	1000-2387	2385.61	-56.81	-26	-26	Pass
NVNT	2-DH1	2480	2387-2400	2394.79	-58.02	-16	-16	Pass
NVNT	2-DH1	2480	2483.5-2496.5	2483.73	-48.71	-16	-16	Pass
NVNT	2-DH1	2480	2496.5-13000	4964.82	-32.96	-26	-26	Pass
NVNT	3-DH1	2402	30-1000	877.78	-66.81	-36	-36	Pass
NVNT	3-DH1	2402	1000-2387	2201.14	-56.77	-26	-26	Pass
NVNT	3-DH1	2402	2387-2400	2399.99	-39.56	-16	-16	Pass
NVNT	3-DH1	2402	2483.5-2496.5	2488.7	-57.44	-16	-16	Pass
NVNT	3-DH1	2402	2496.5-13000	4807.27	-31.02	-26	-26	Pass
NVNT	3-DH1	2441	30-1000	418.97	-66.26	-36	-36	Pass
NVNT	3-DH1	2441	1000-2387	2119.31	-57.1	-26	-26	Pass
NVNT	3-DH1	2441	2387-2400	2388.53	-57.39	-16	-16	Pass
NVNT	3-DH1	2441	2483.5-2496.5	2486.92	-57.2	-16	-16	Pass
NVNT	3-DH1	2441	2496.5-13000	4880.79	-34.29	-26	-26	Pass
NVNT	3-DH1	2480	30-1000	891.36	-66.84	-36	-36	Pass
NVNT	3-DH1	2480	1000-2387	2263.56	-56.64	-26	-26	Pass
NVNT	3-DH1	2480	2387-2400	2391.17	-58.36	-16	-16	Pass
NVNT	3-DH1	2480	2483.5-2496.5	2483.57	-48.86	-16	-16	Pass
NVNT	3-DH1	2480	2496.5-13000	4964.82	-33.1	-26	-26	Pass


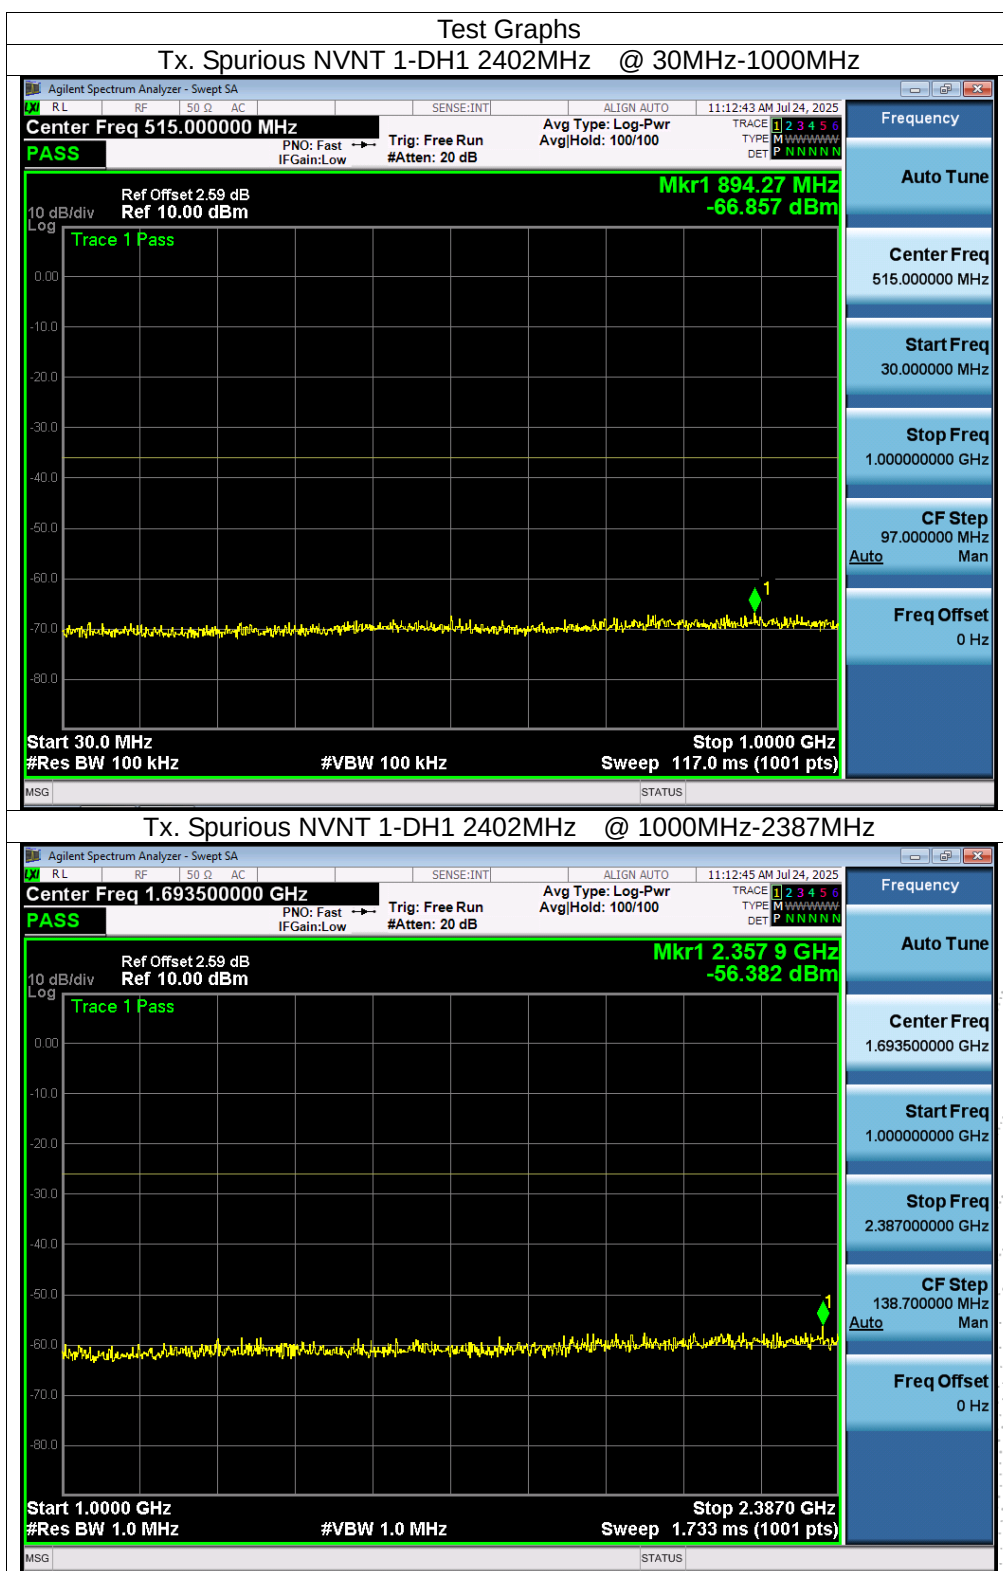


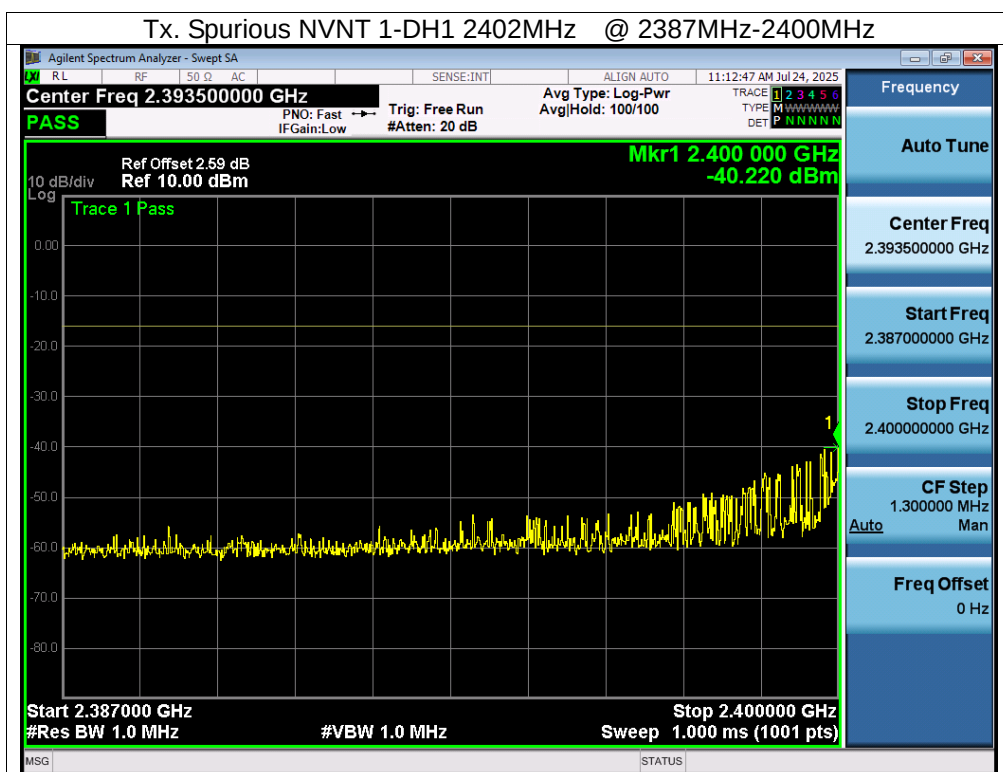
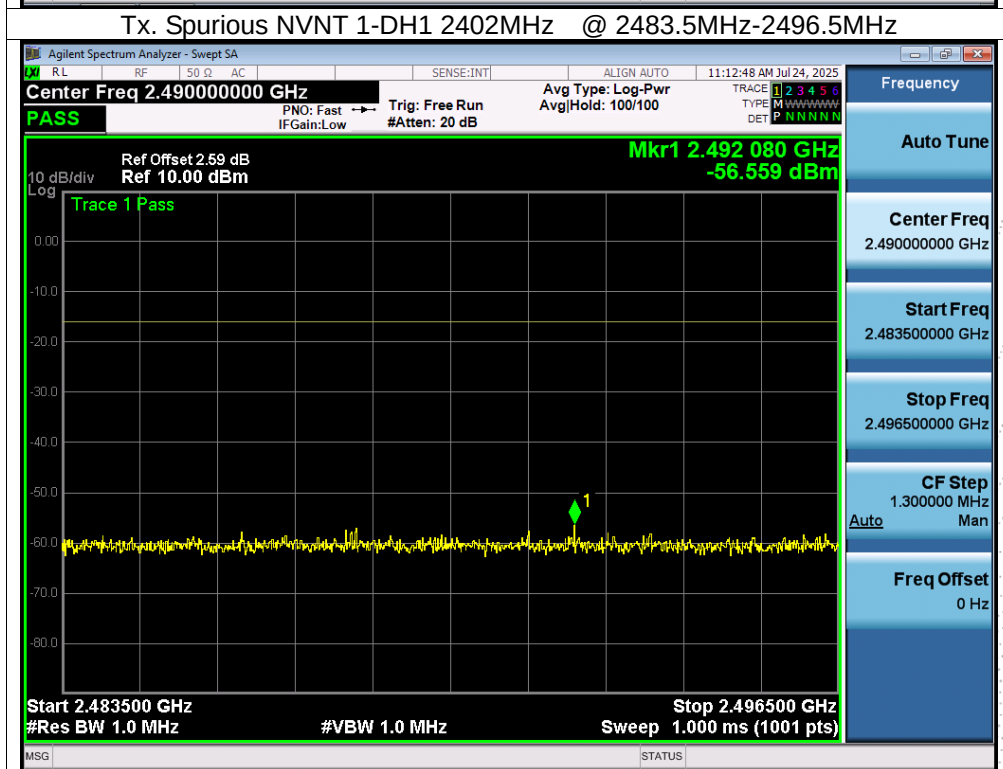




CHENZHEN

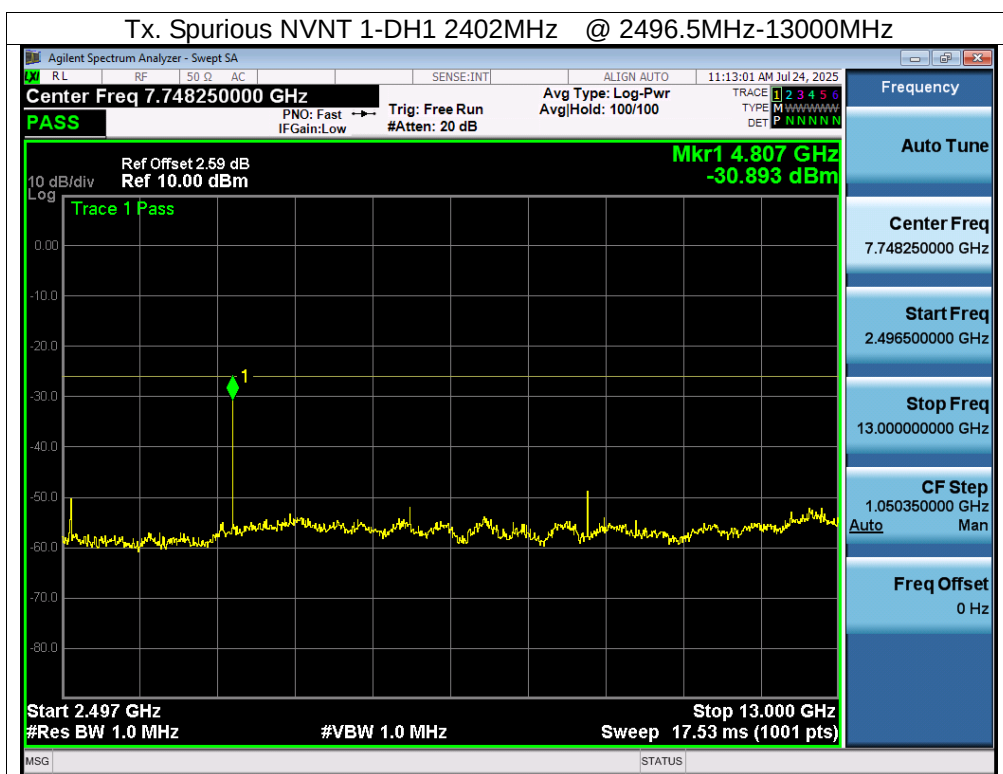
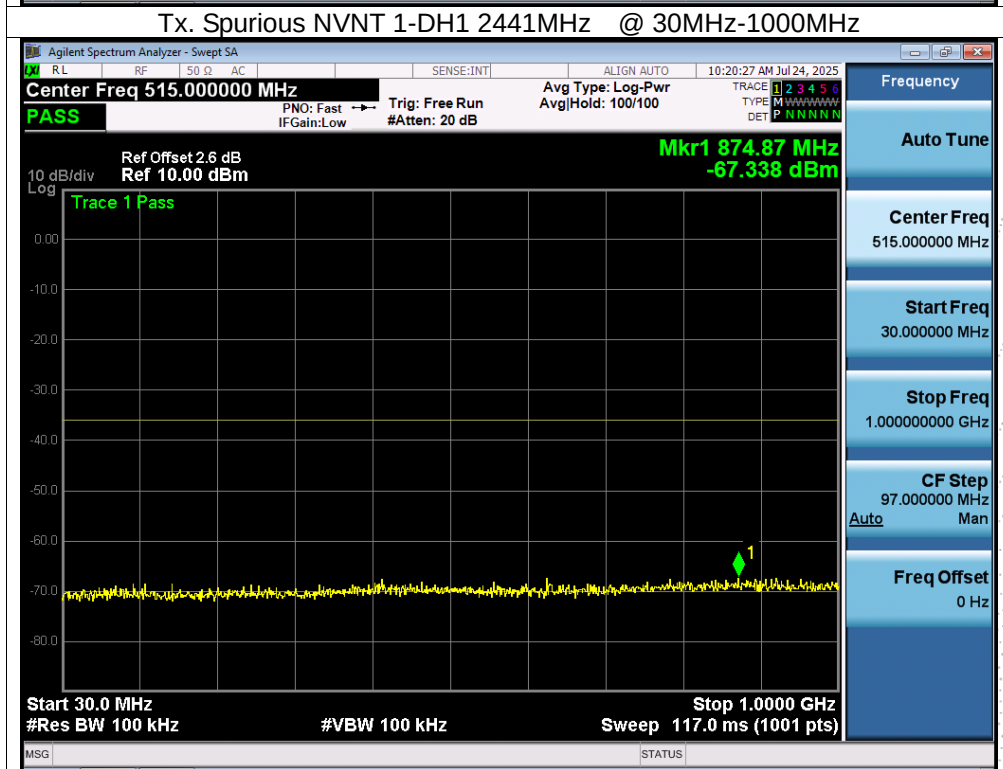


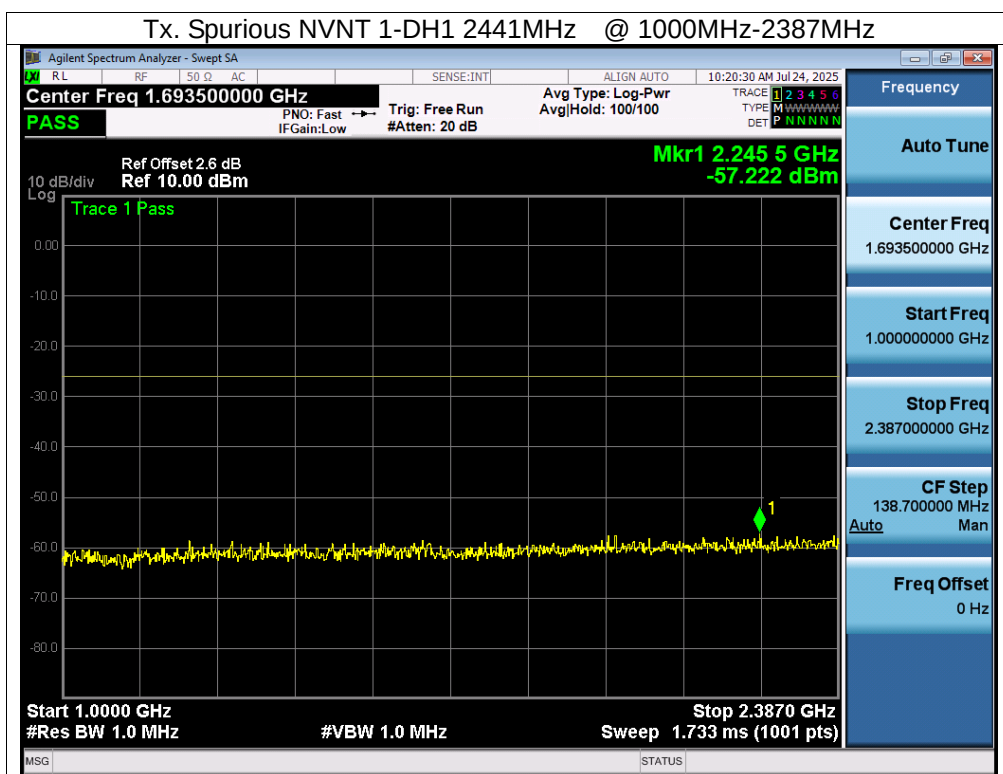
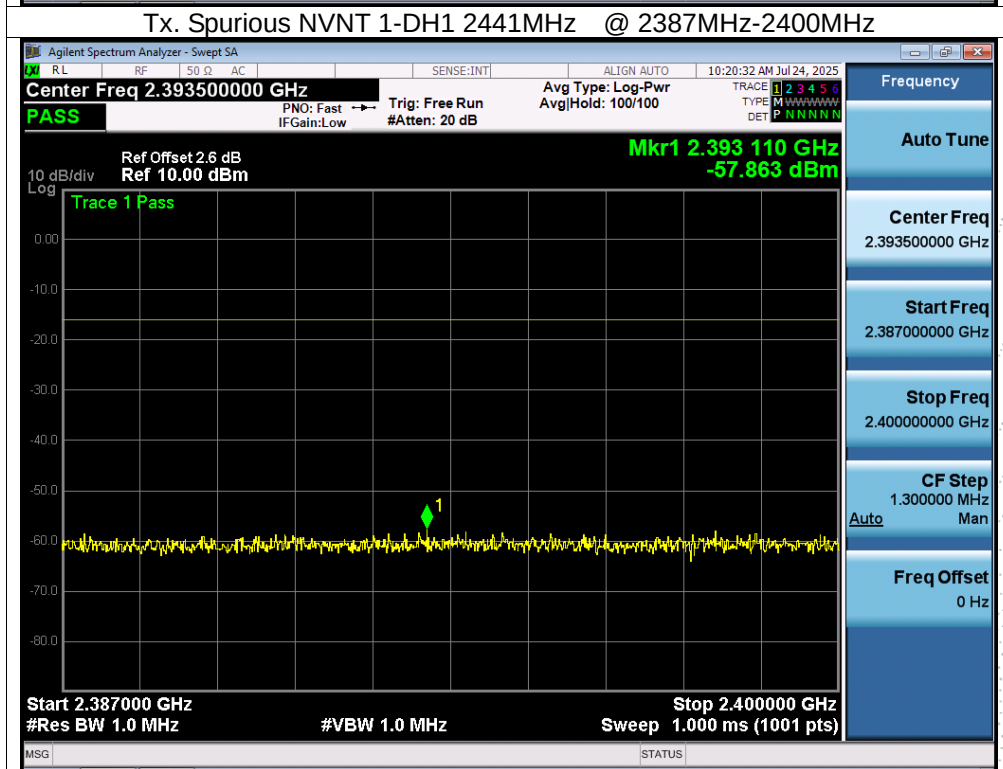


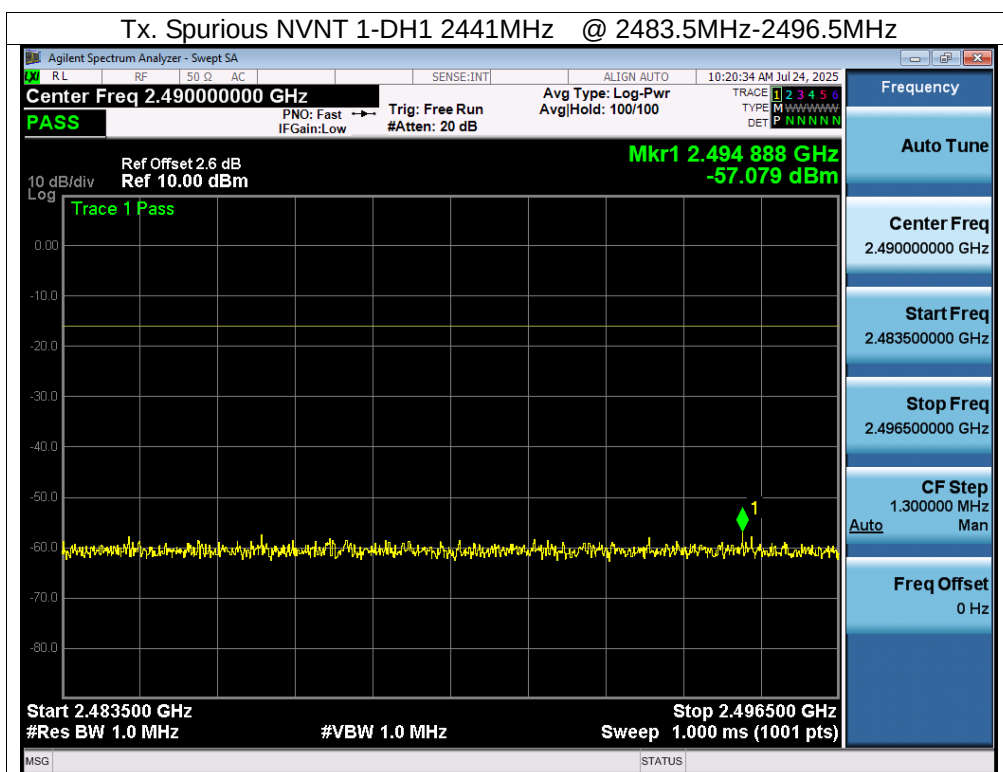
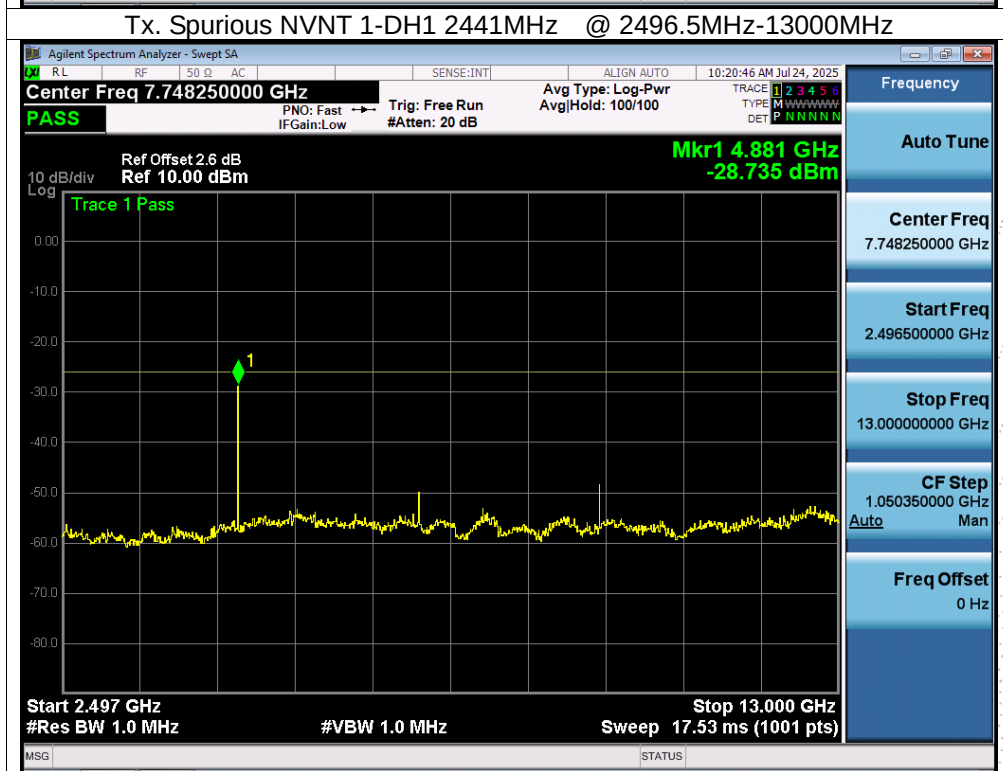


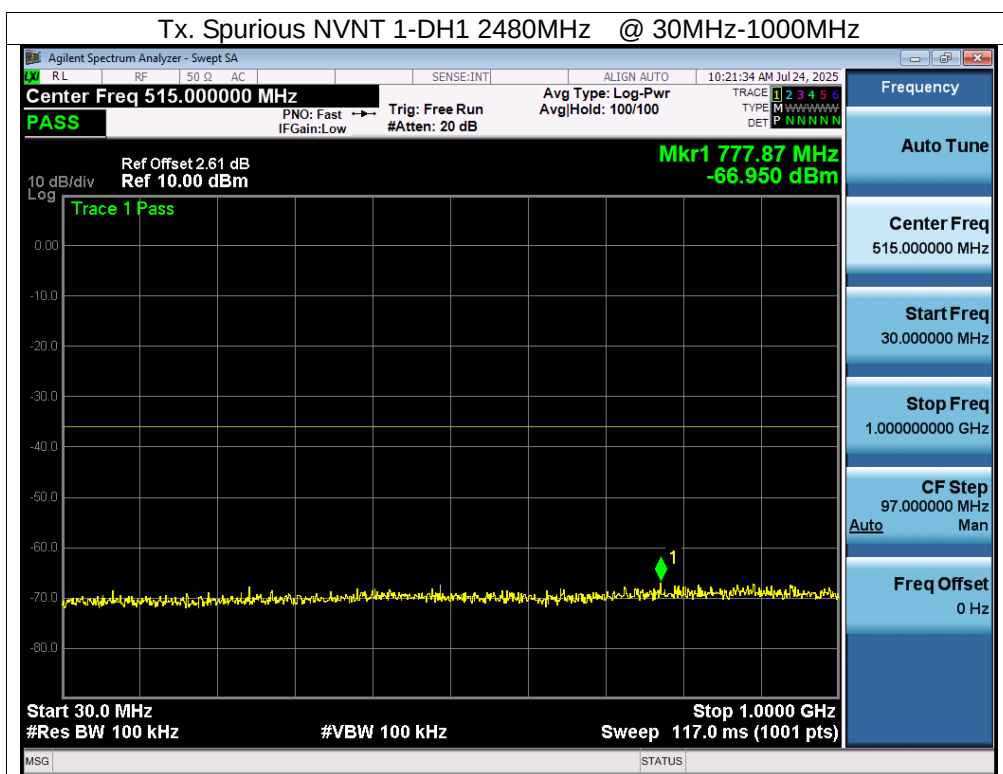
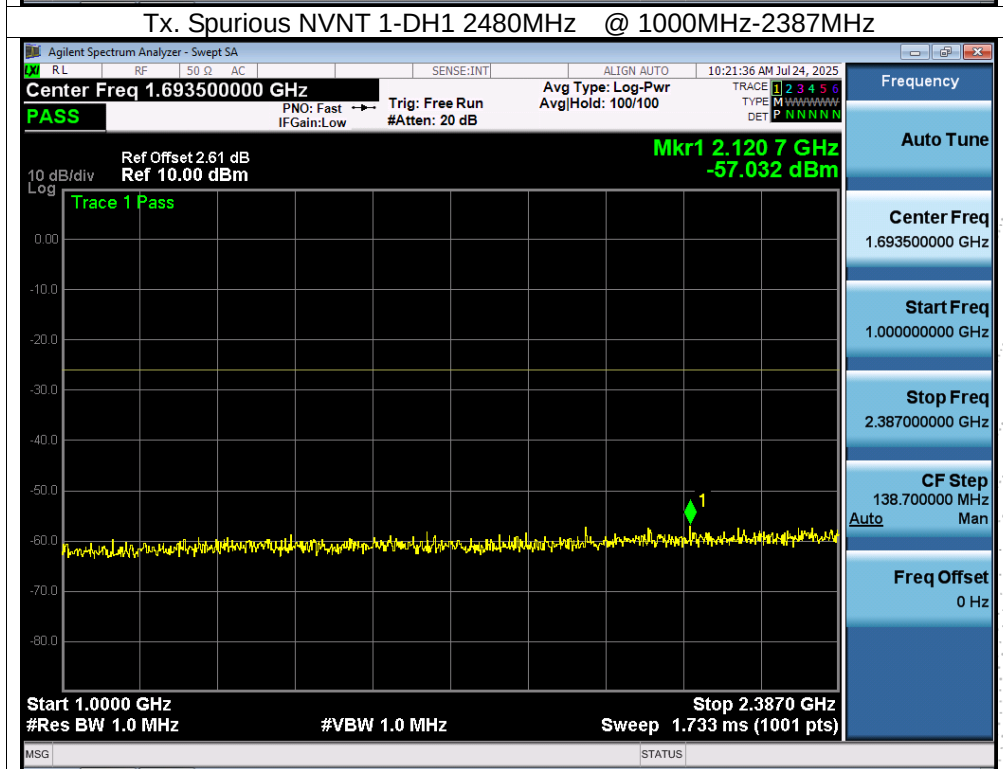


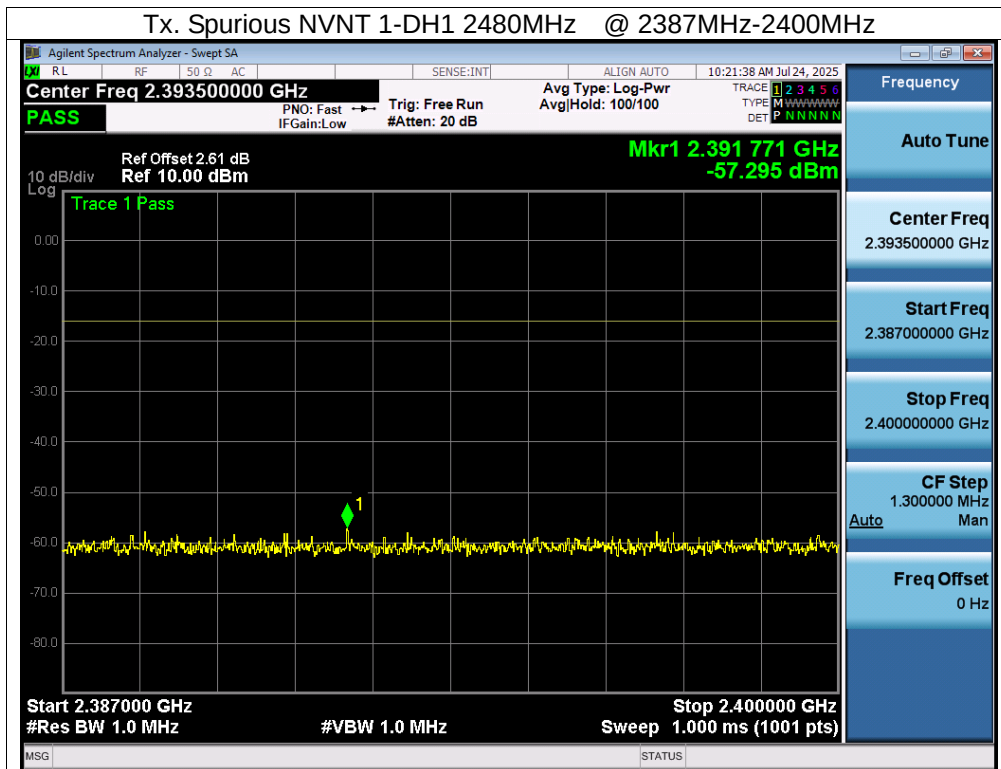
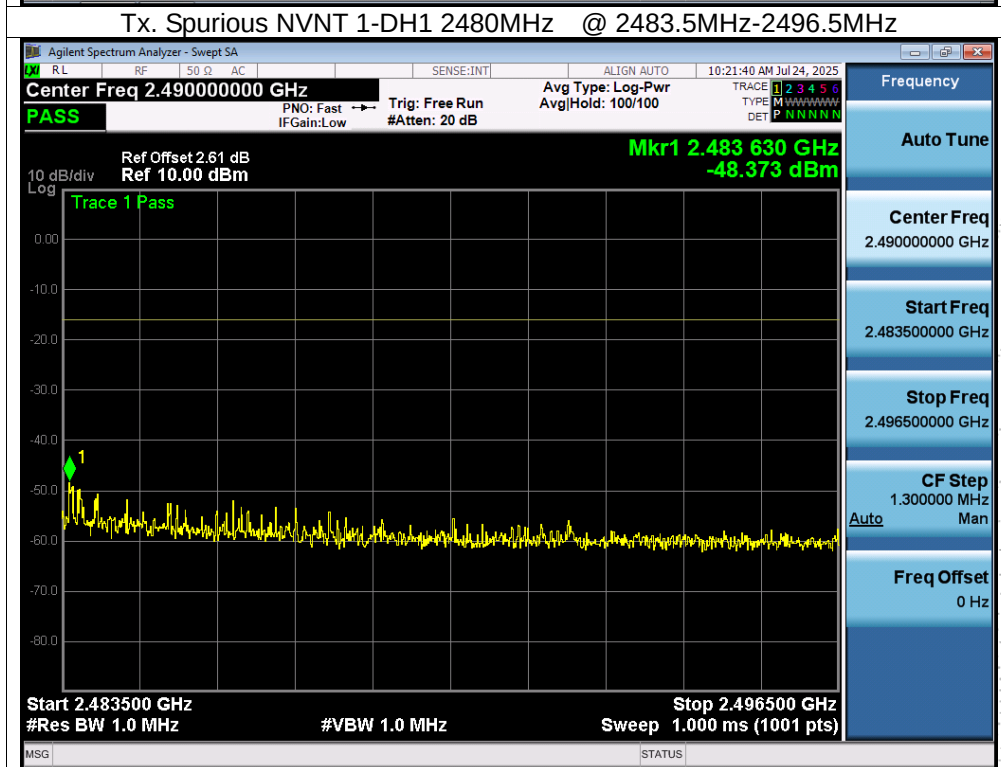


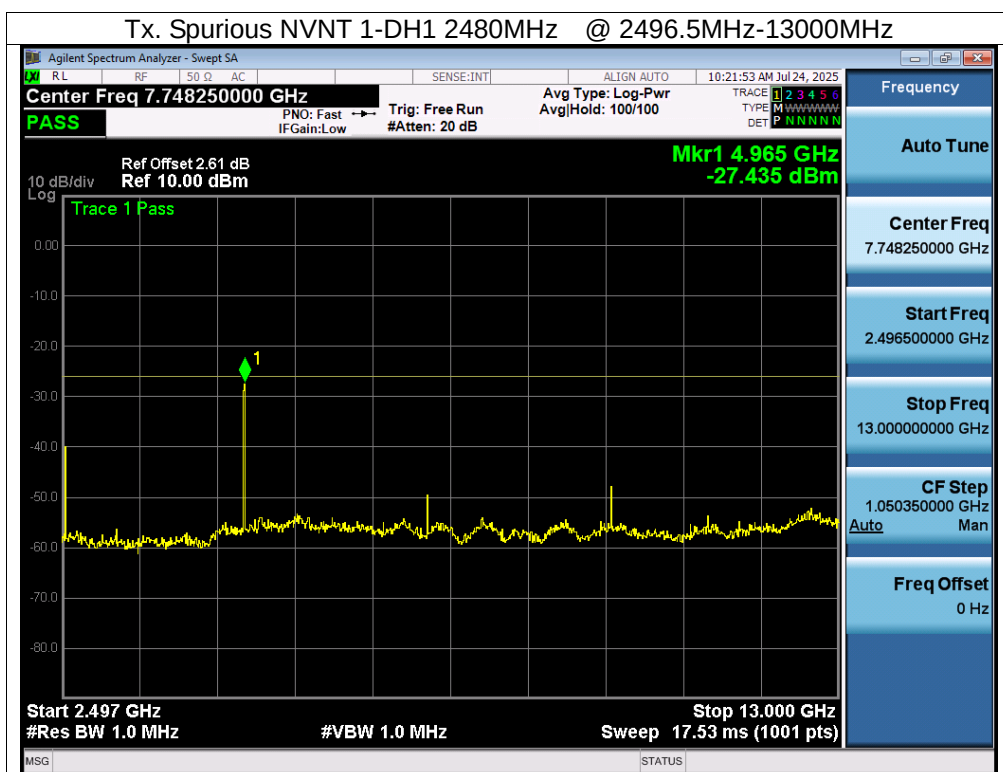
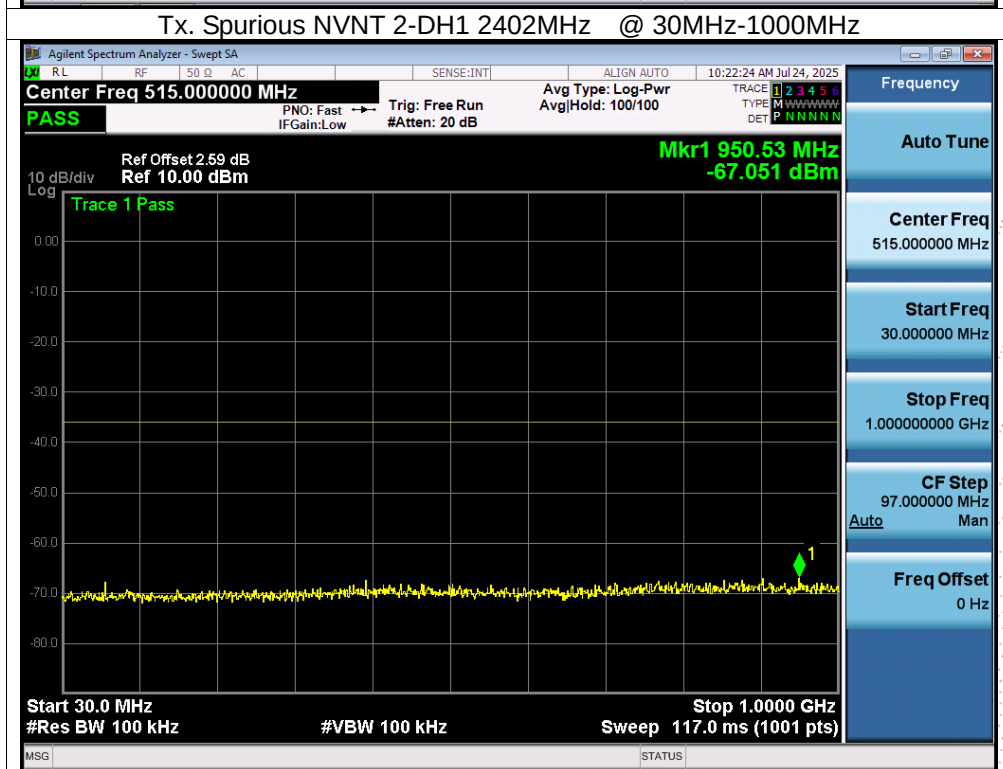


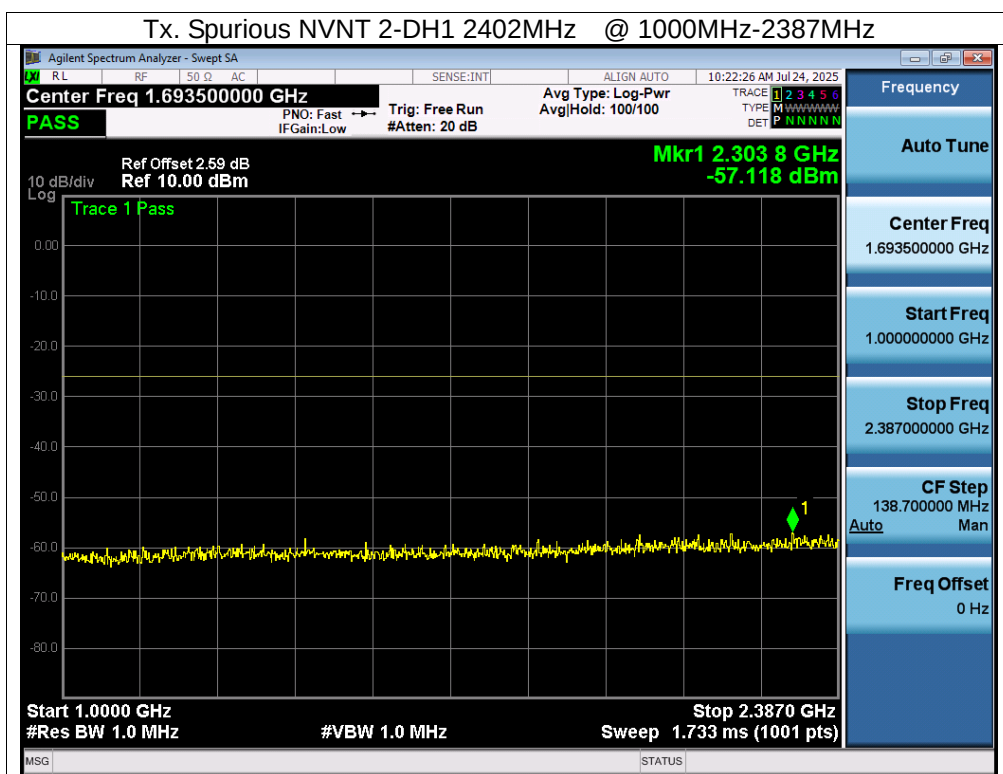
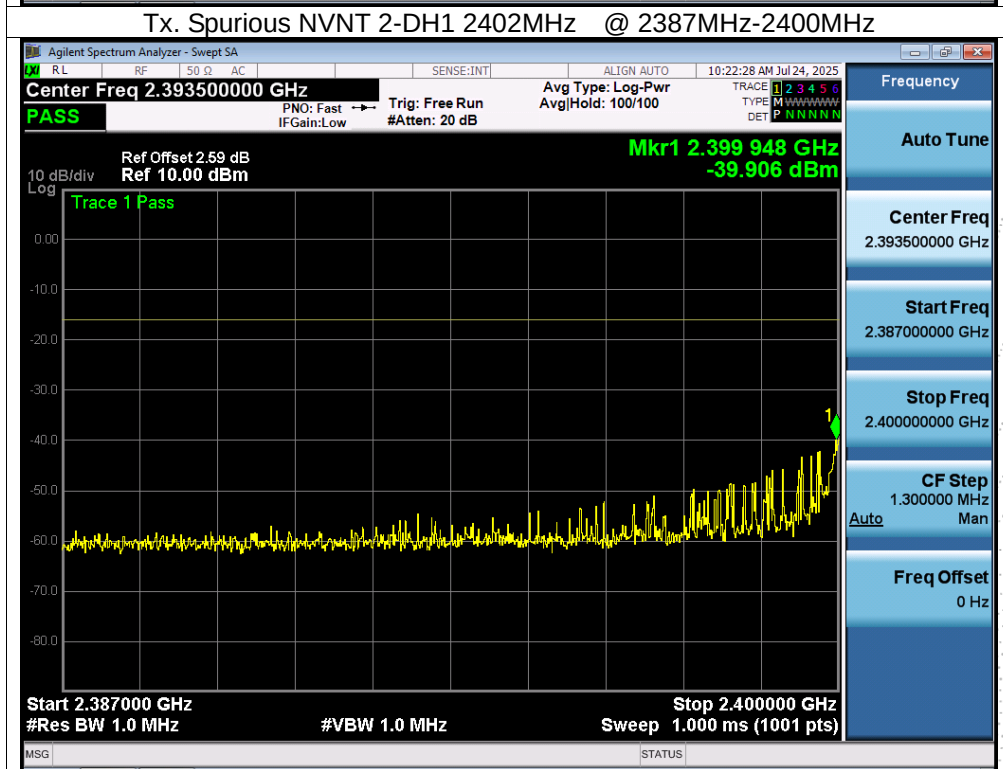


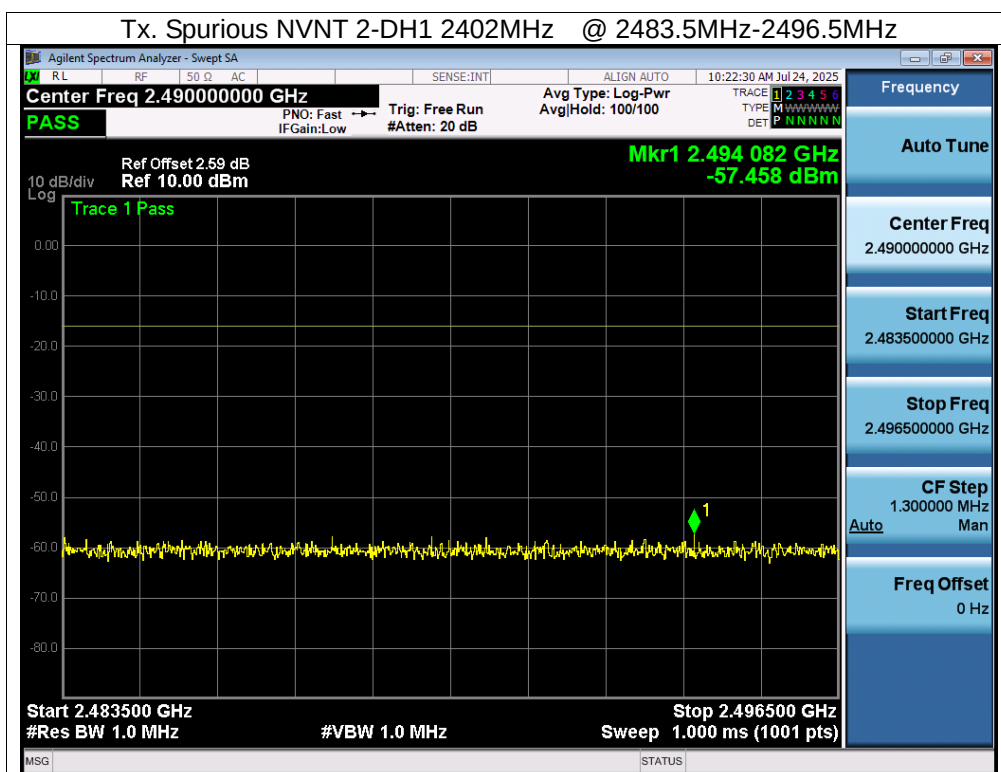
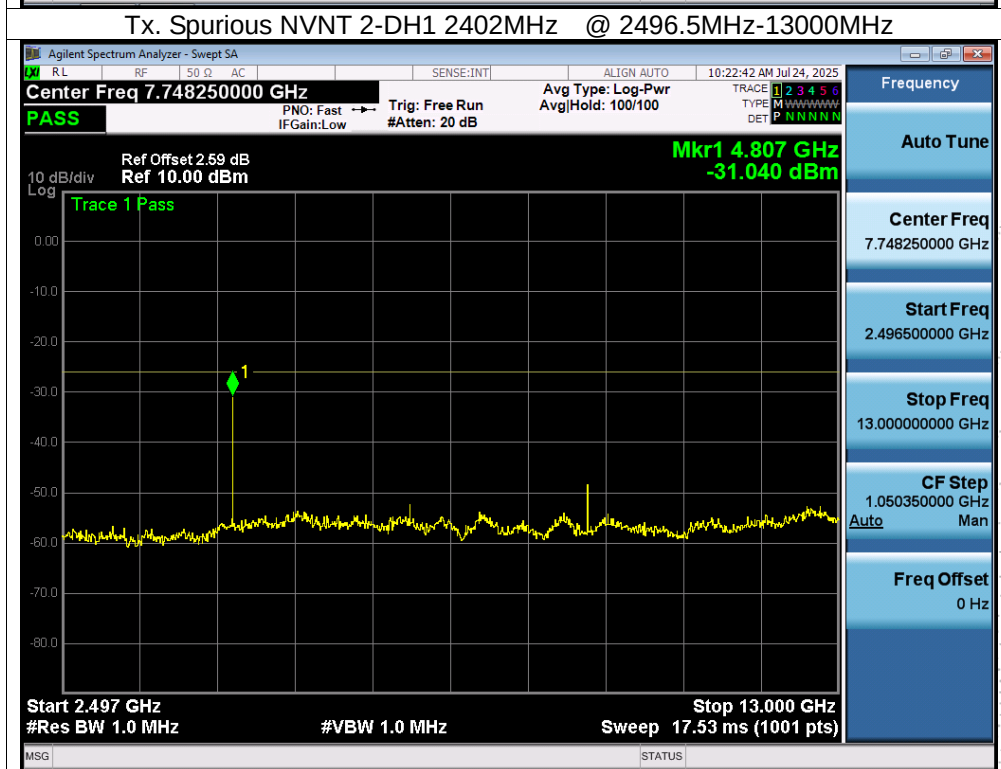


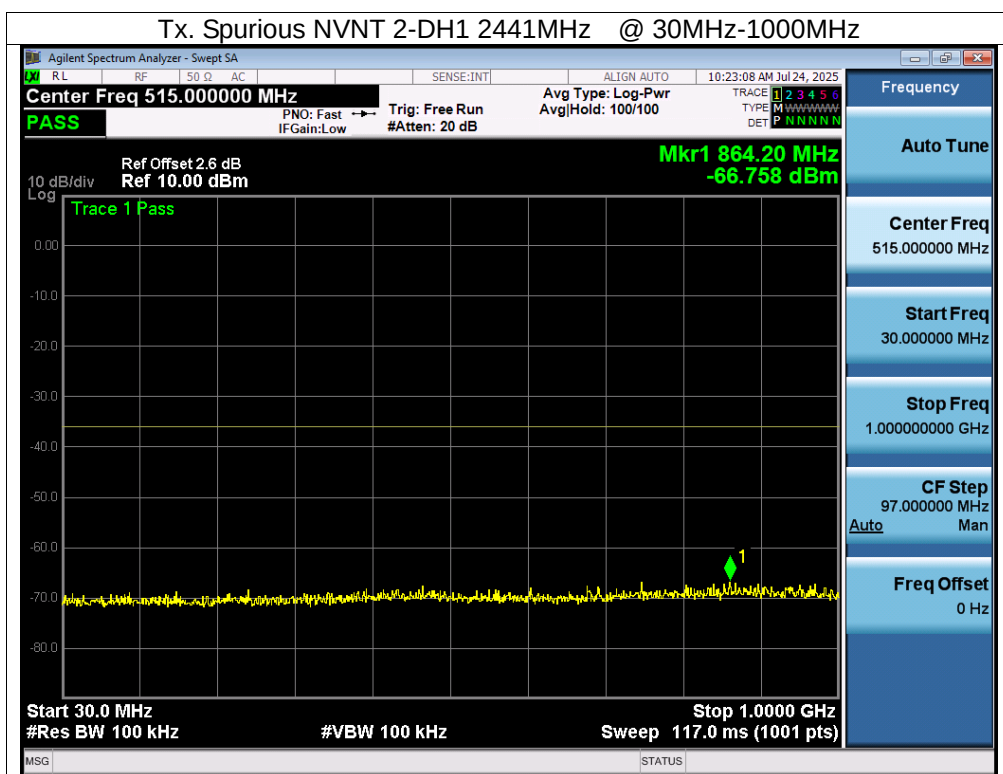
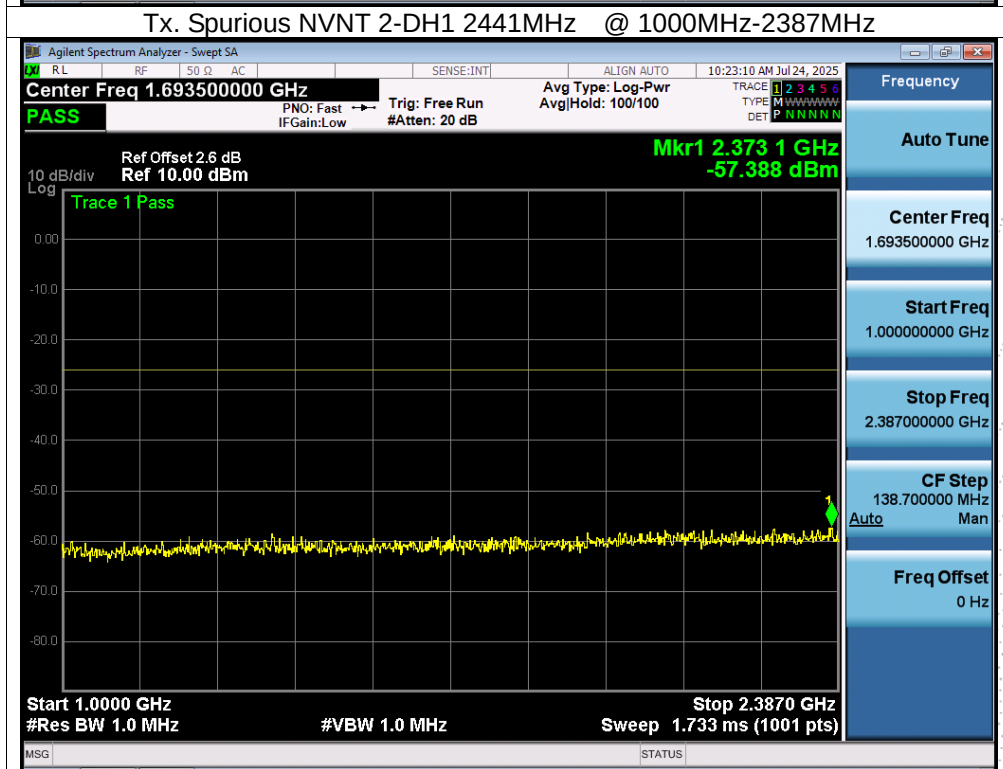


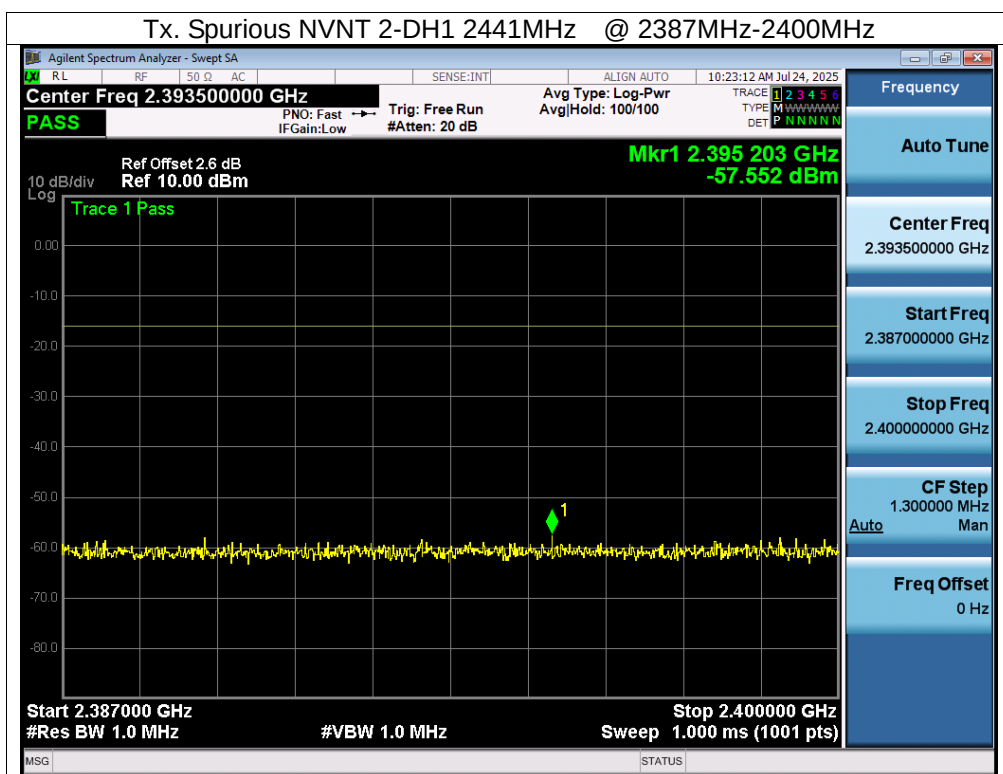
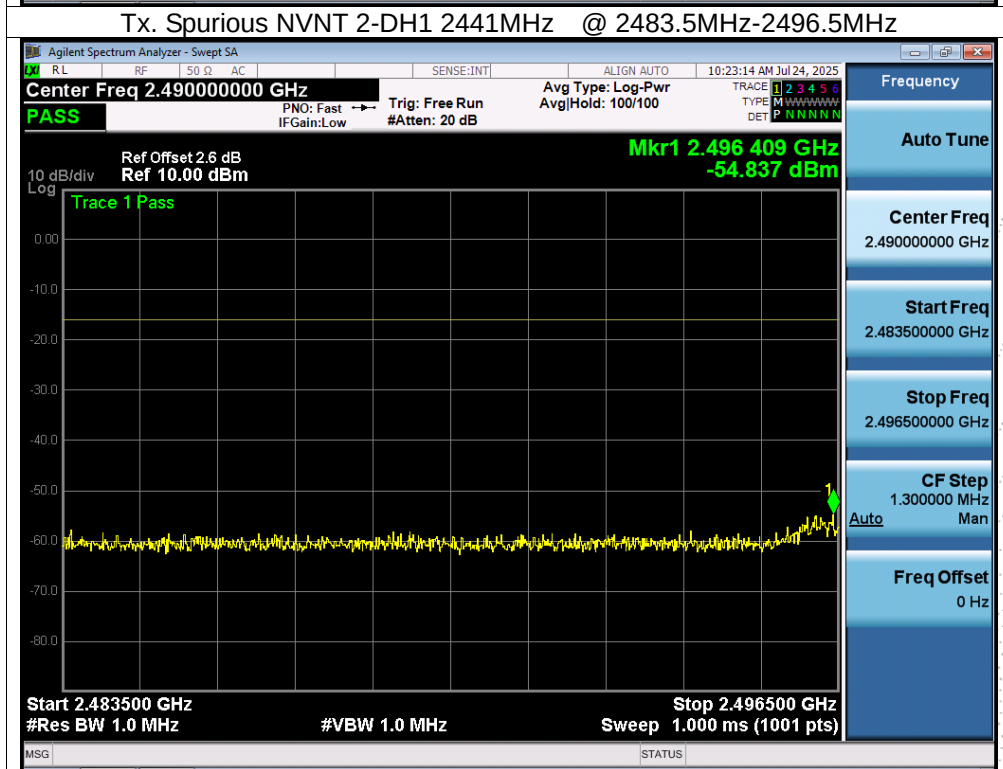


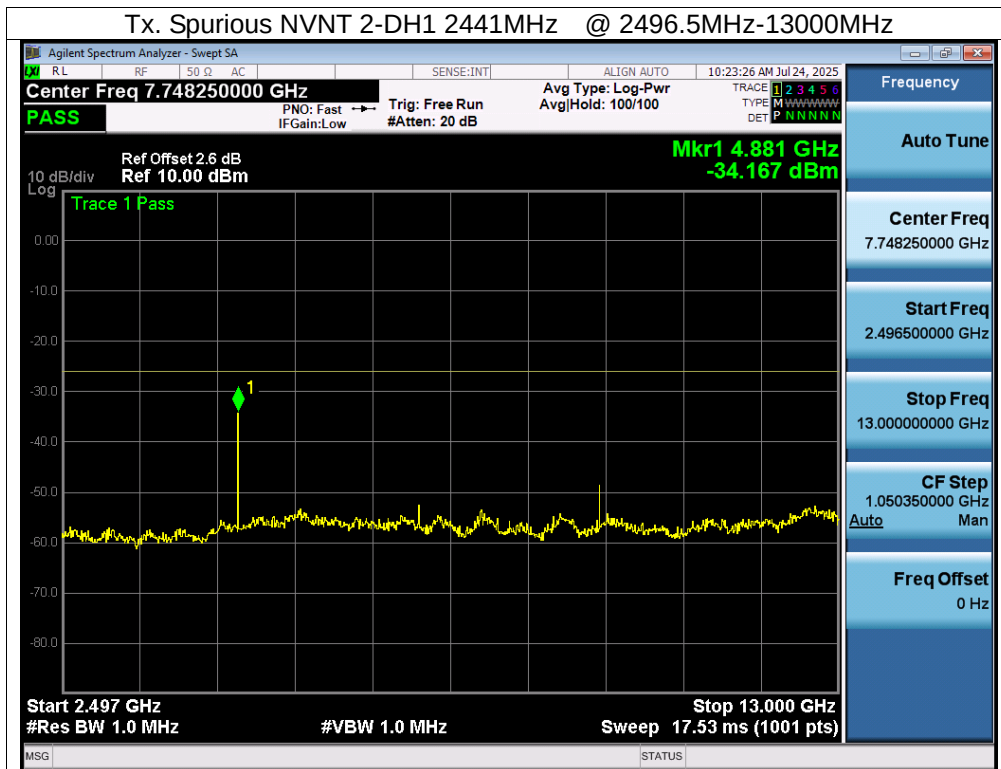
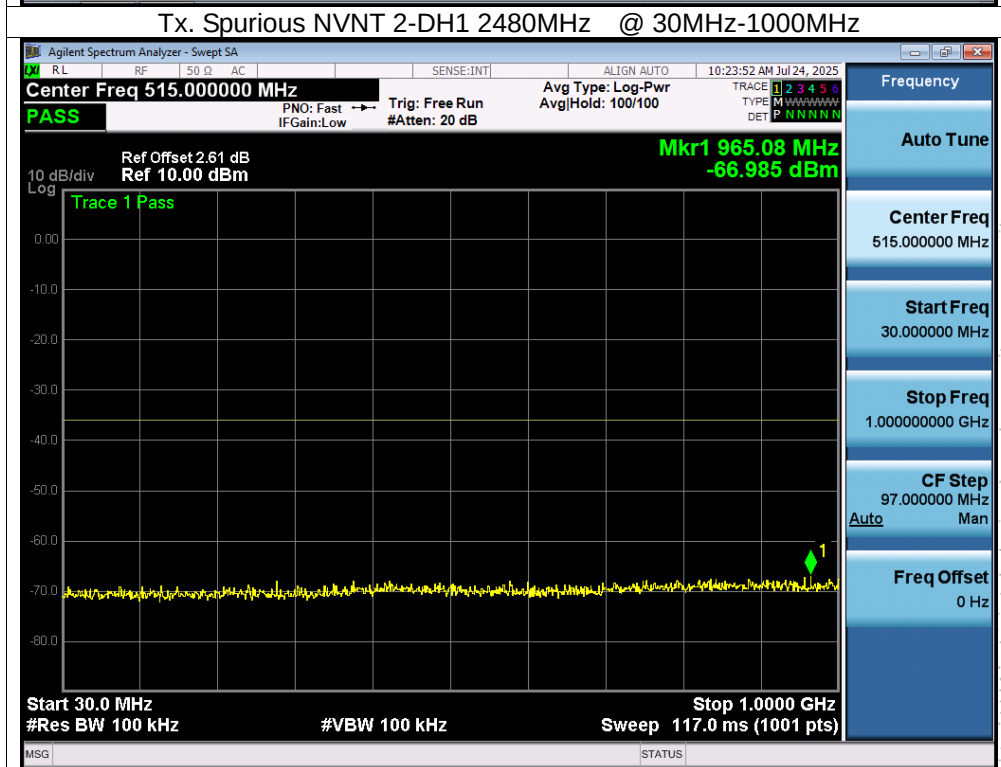


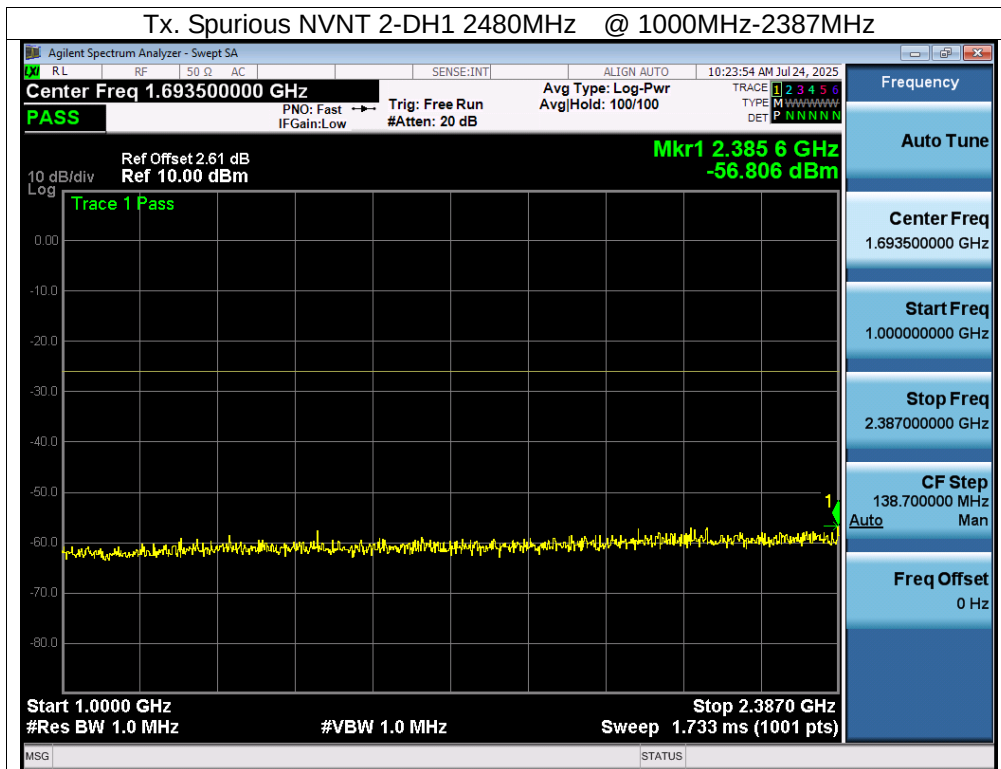
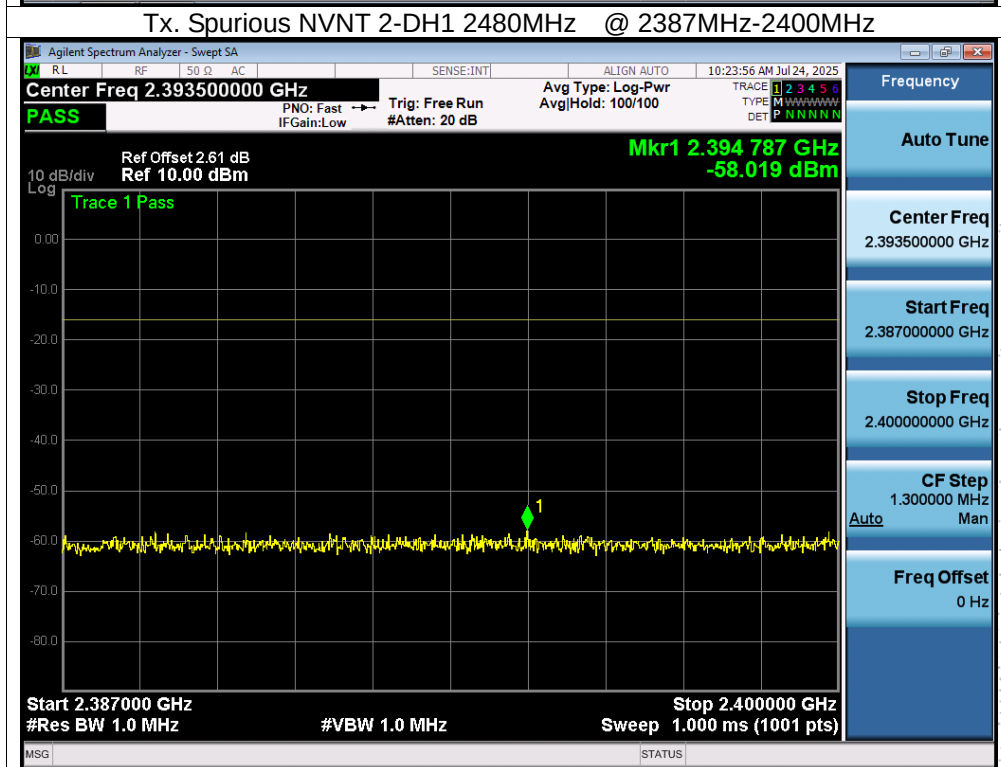


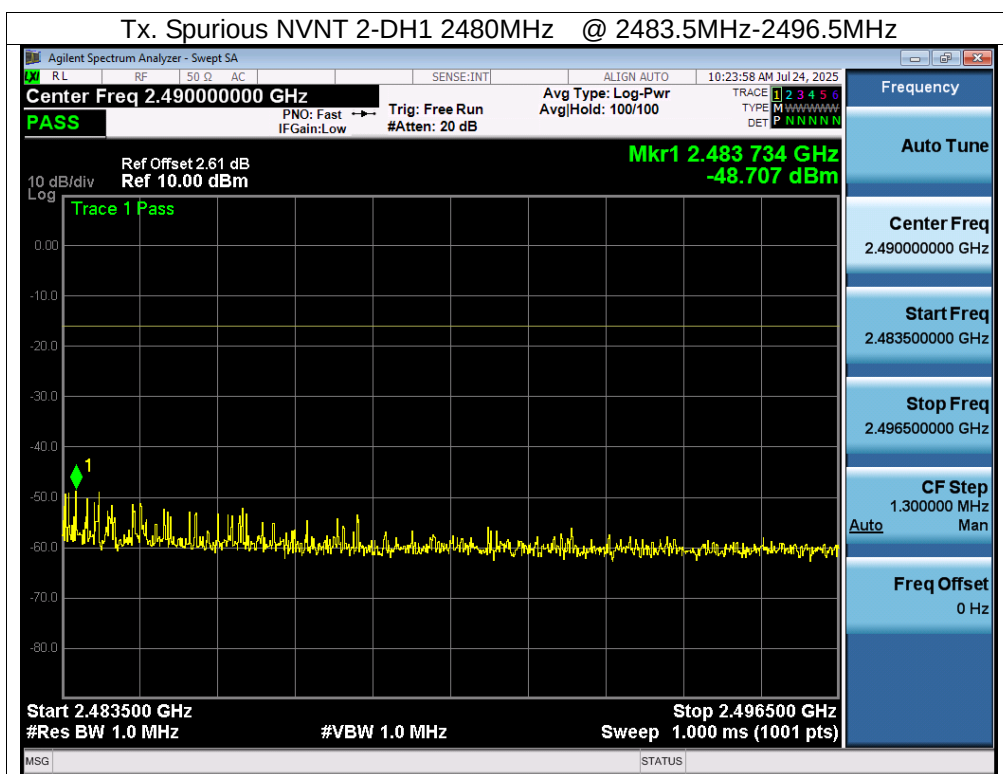
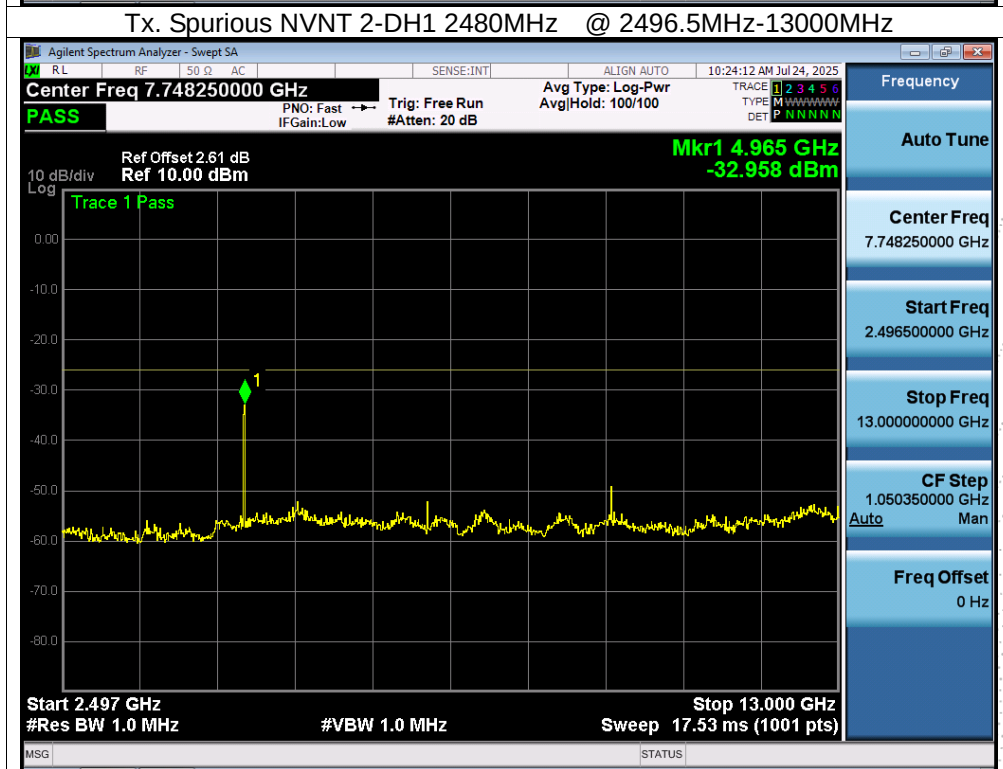


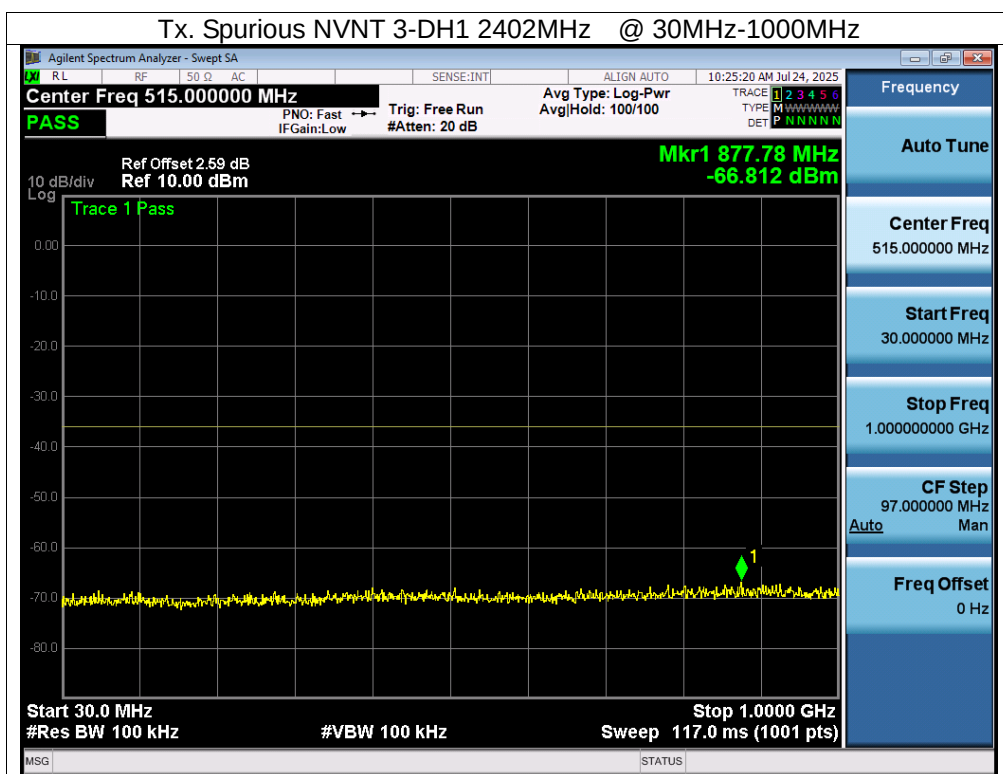
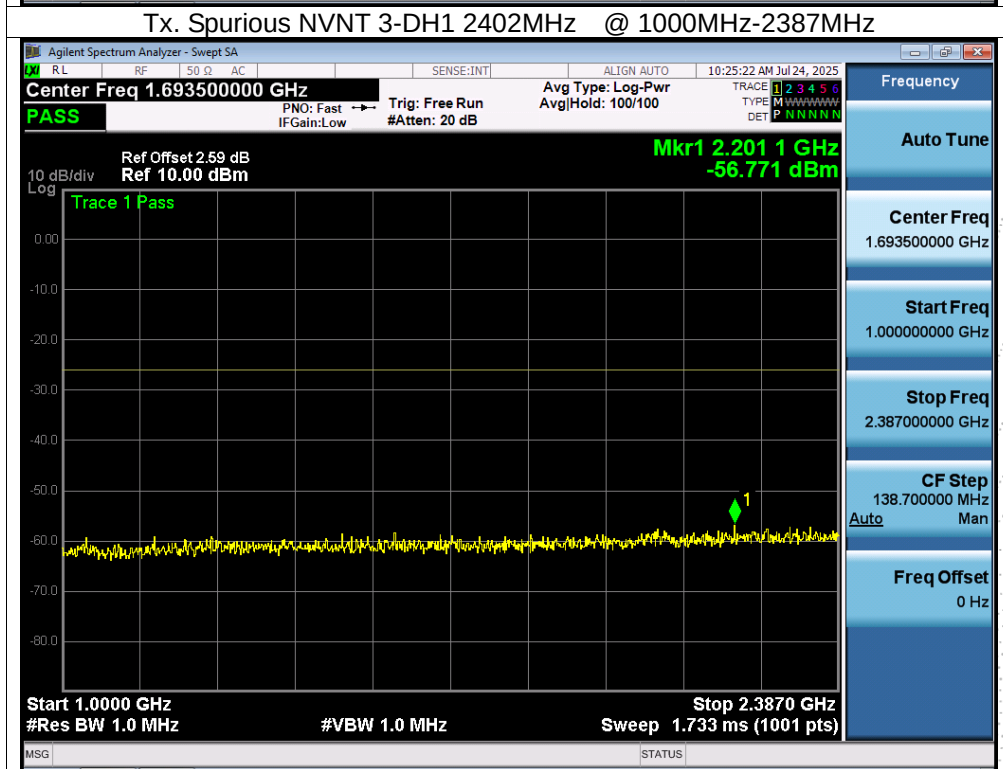


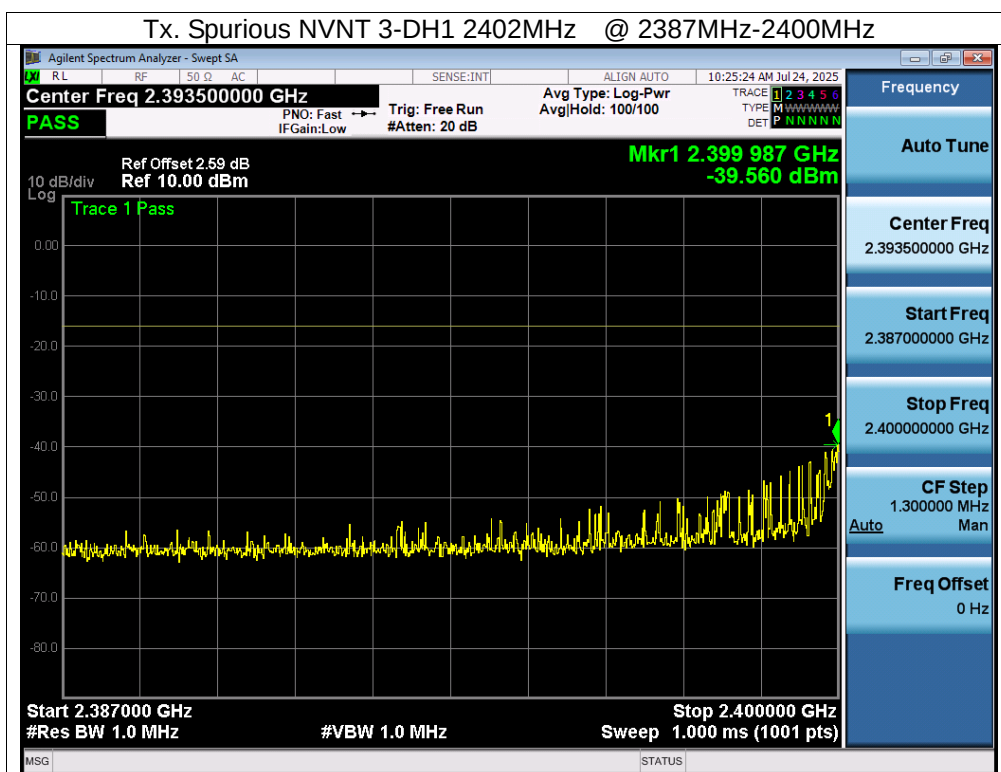
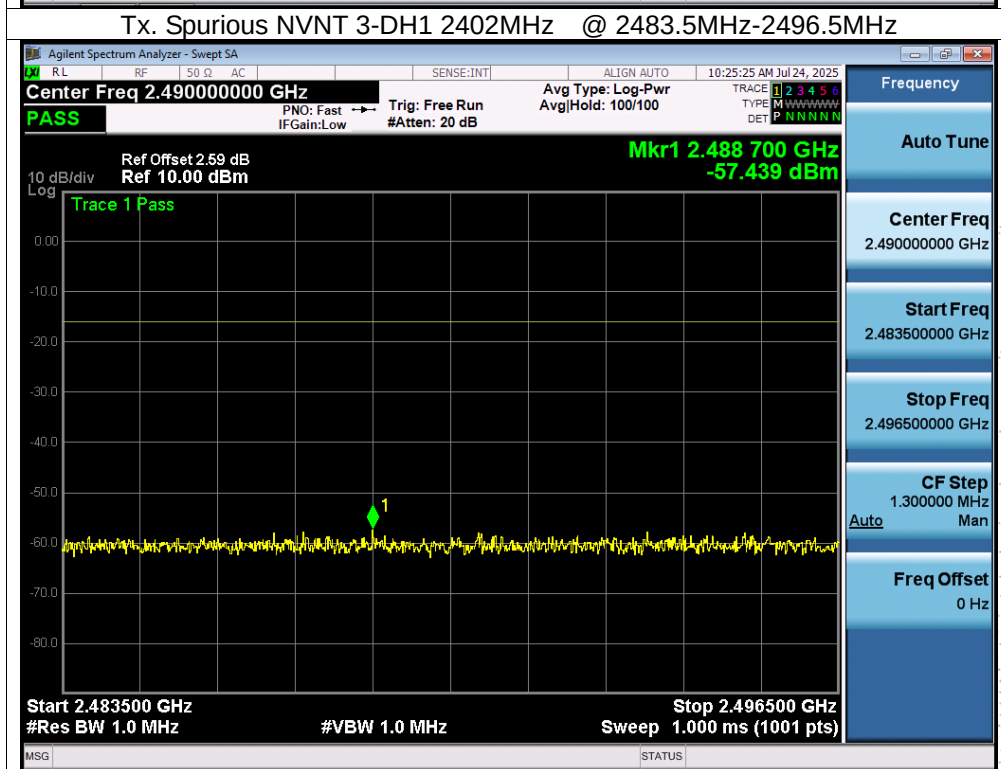


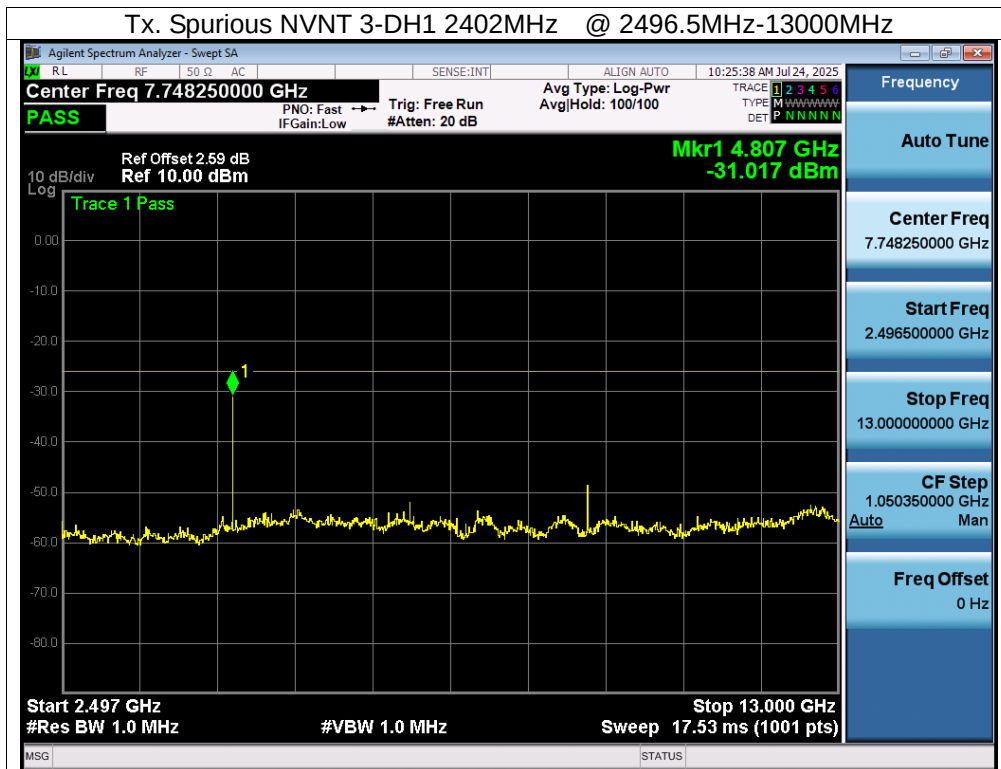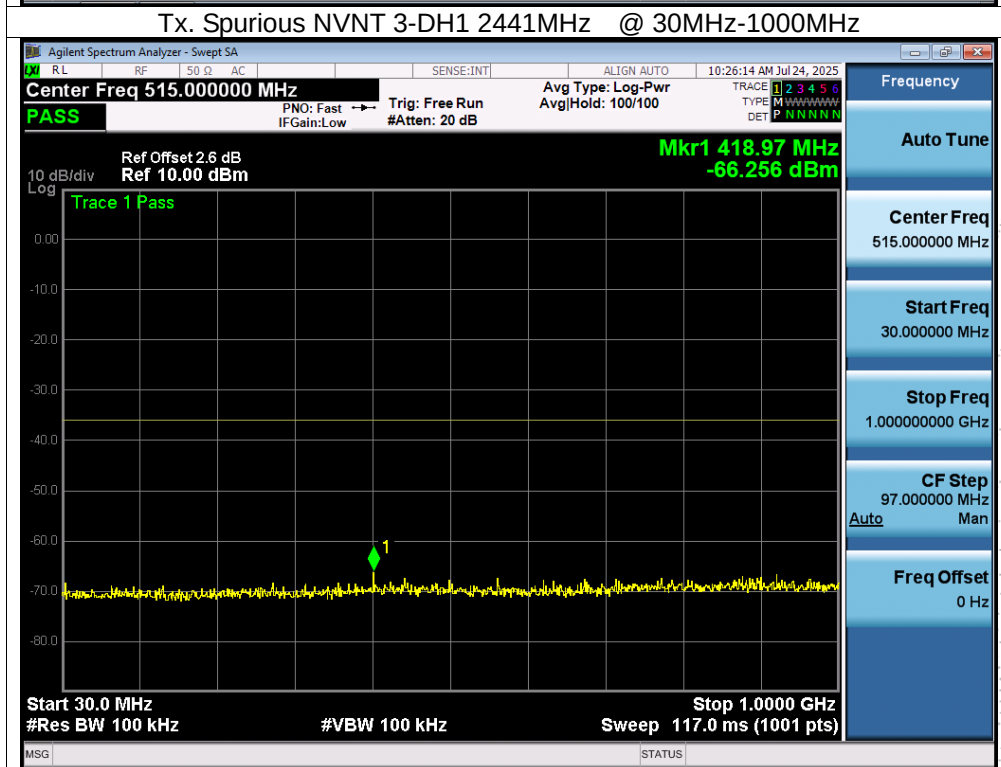


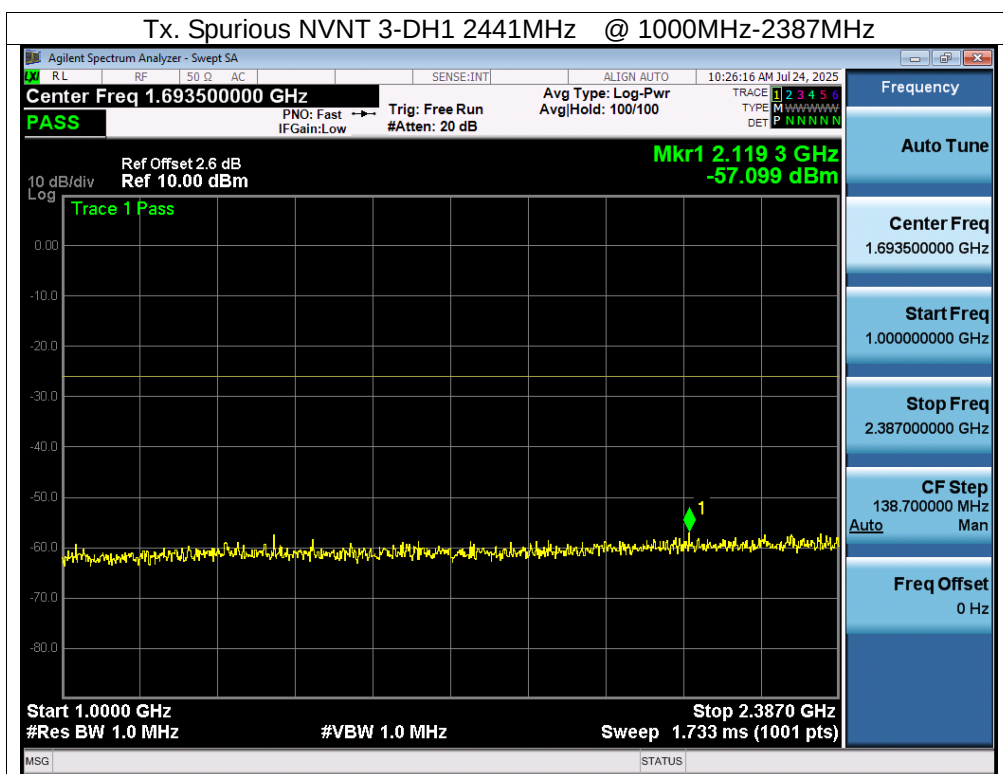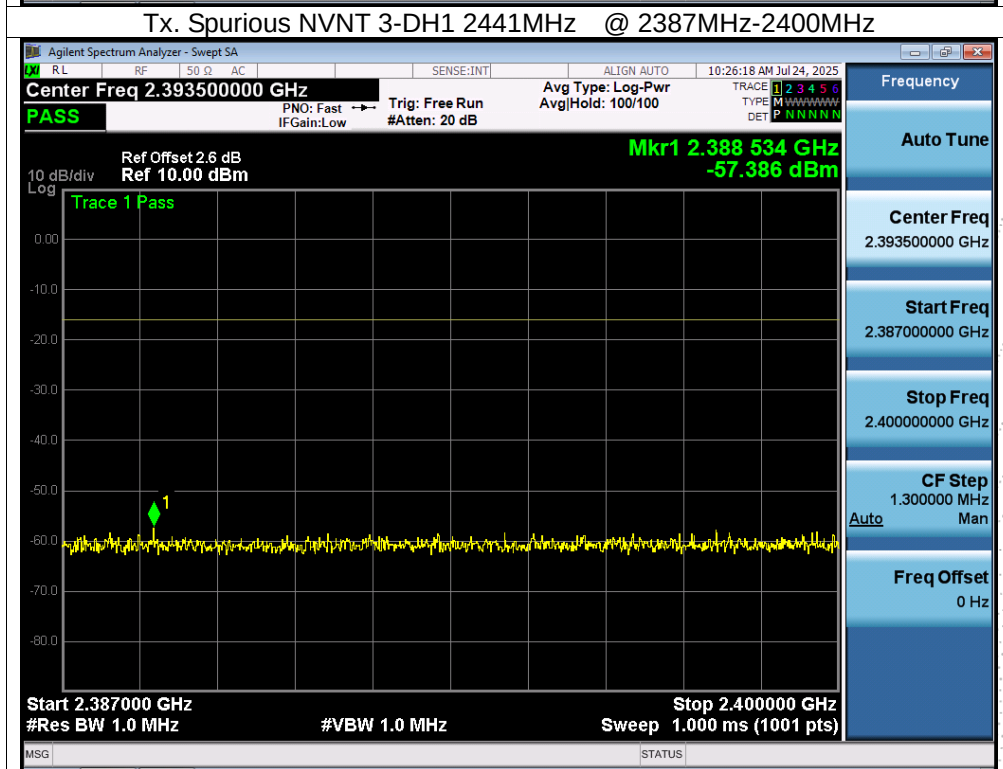

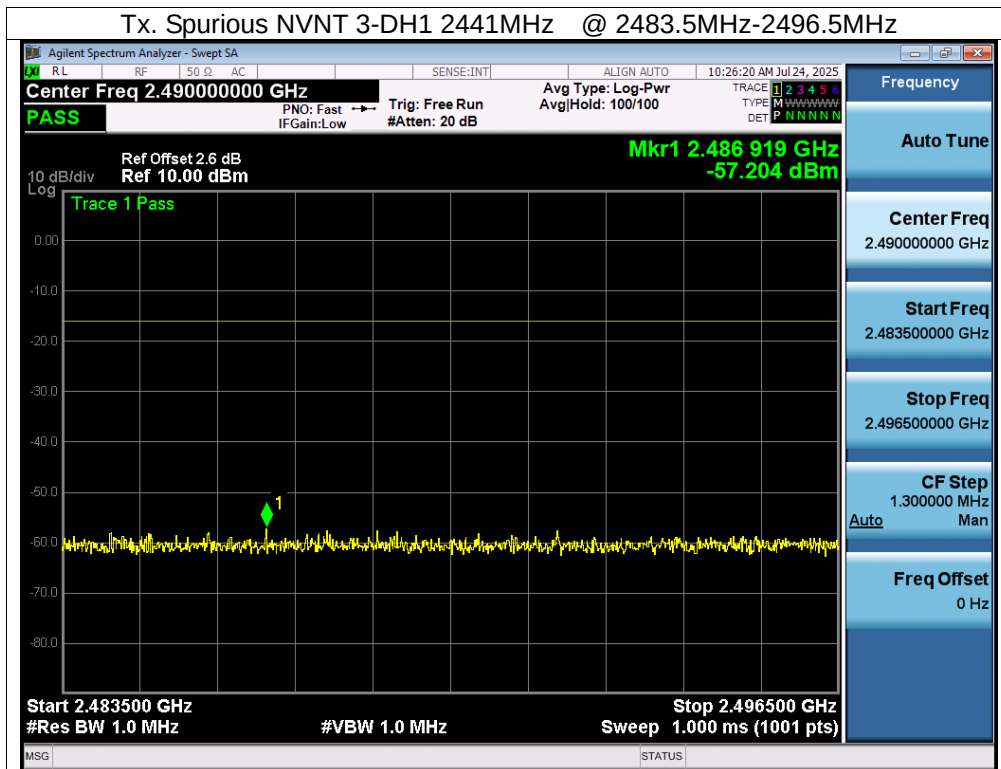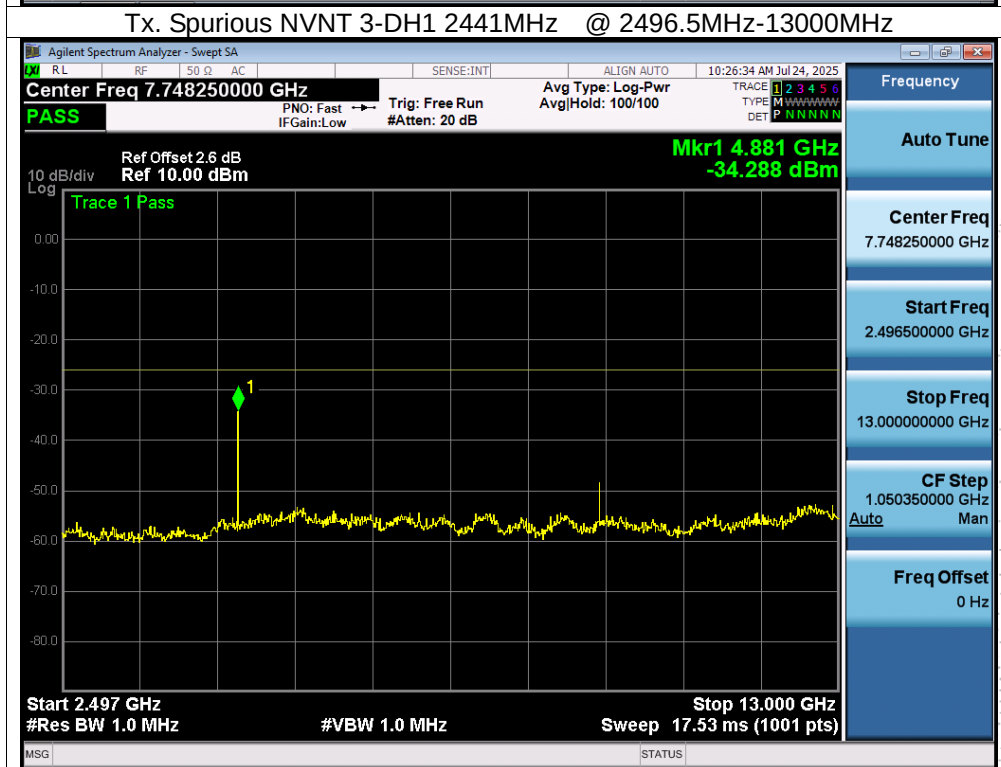

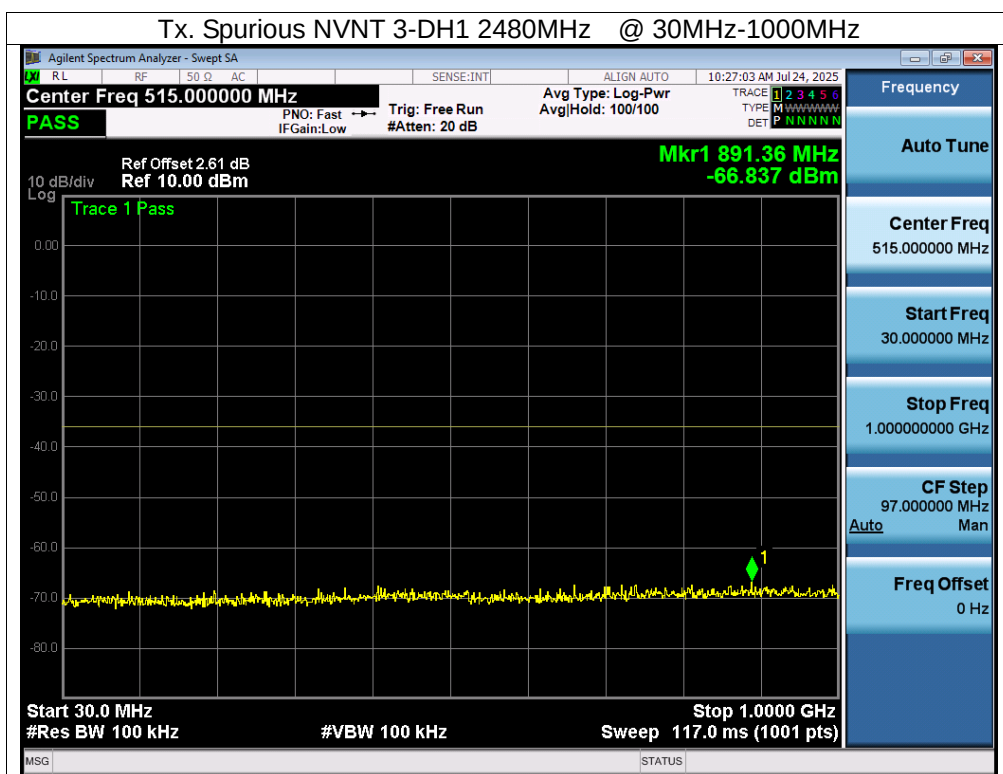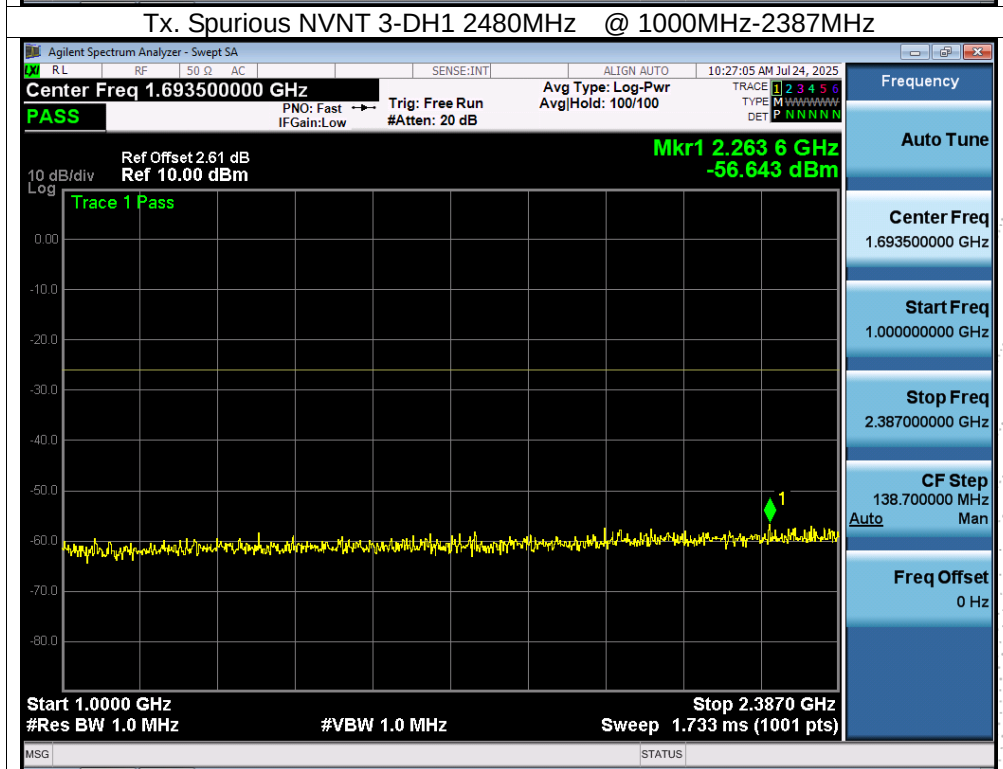

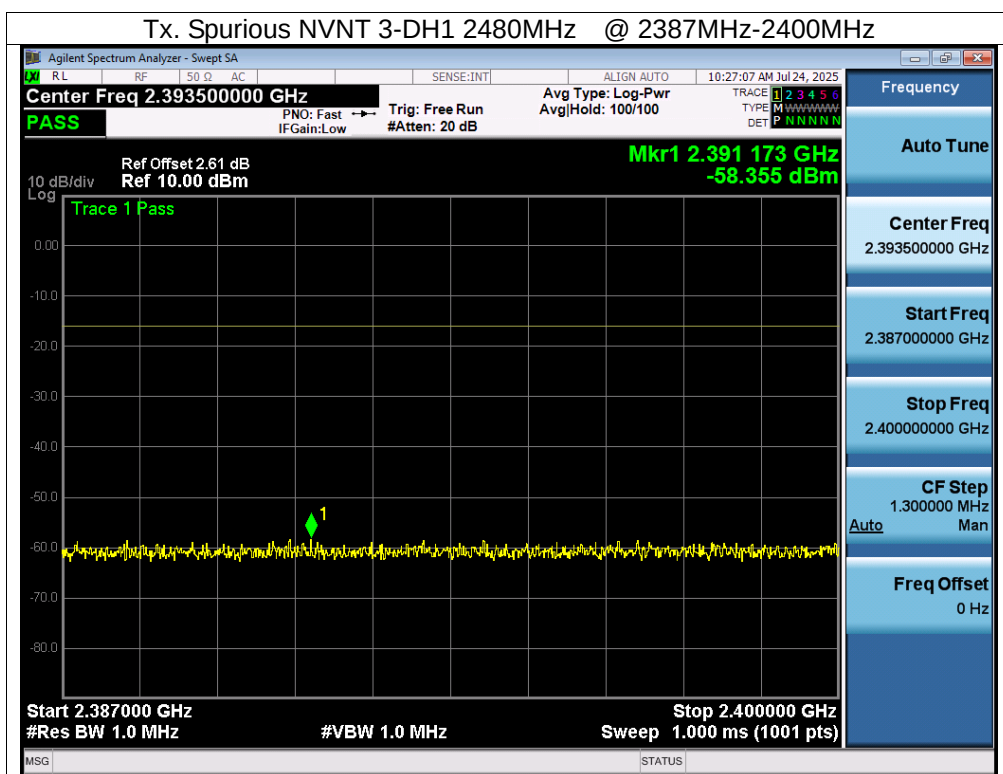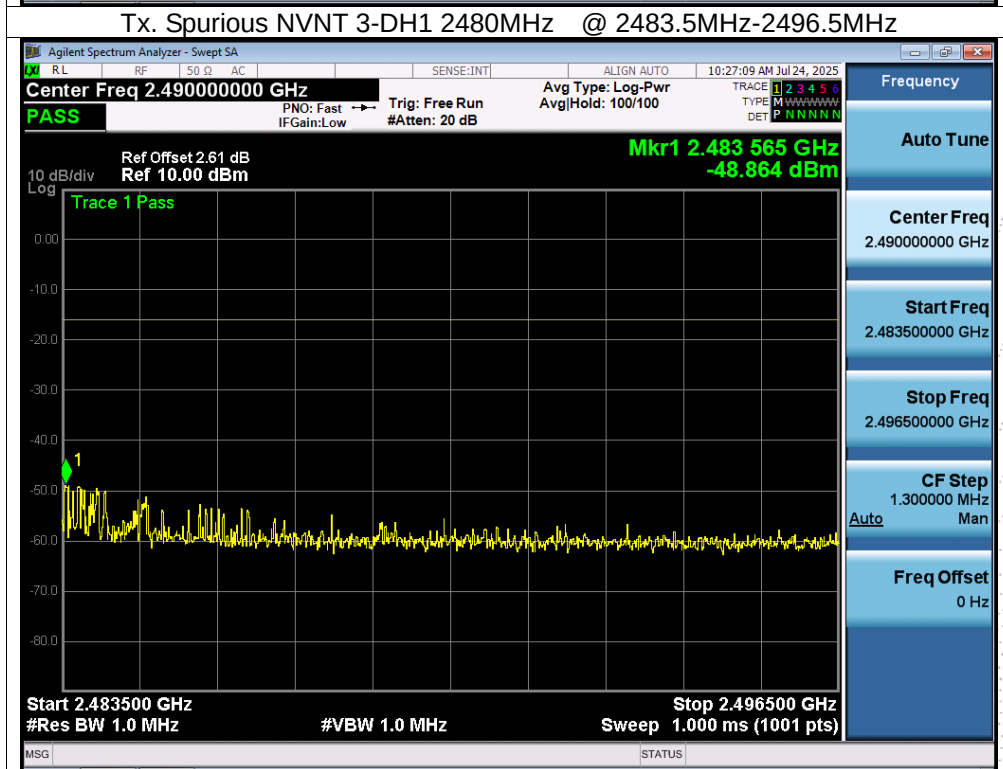


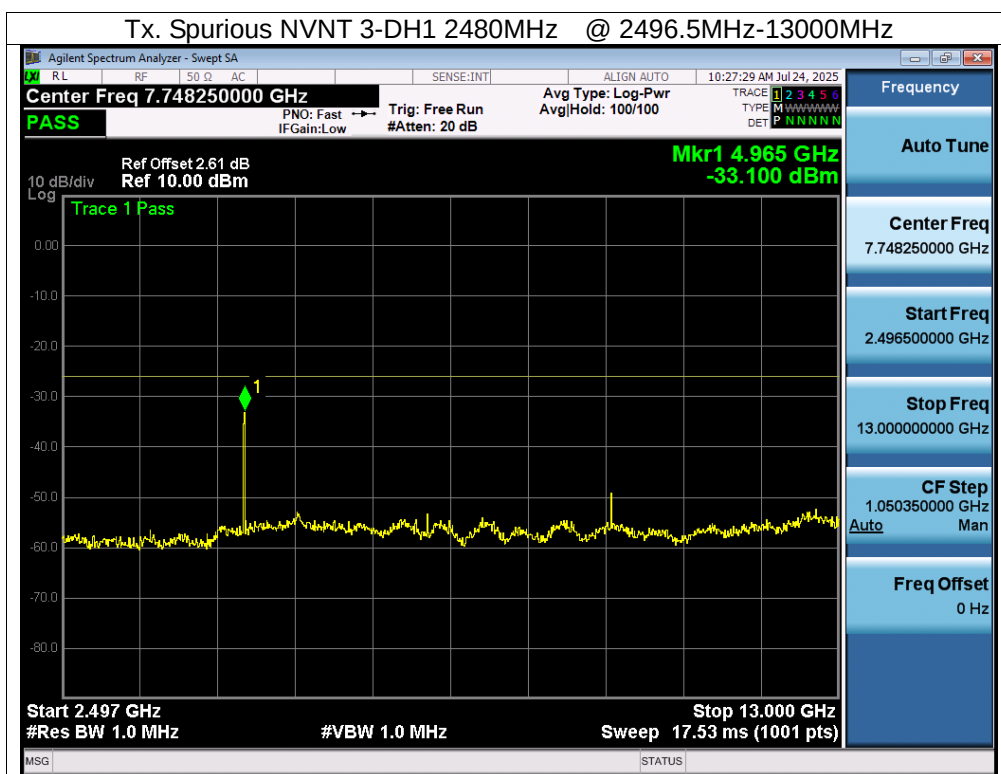


TE
TO
OVB
t Sea



Temperature:	26°C		
Humidity:	54 % RH	Test Voltage	DC 3.7V
Test Mode:	Hopping		

Condition	Mode	Range (MHz)	Emission Frequency (MHz)	Max Value (dBm)	Limit Start(dBm)	Limit Stop (dBm)	Verdict
NVNT	1-DH1	30-1000	743.92	-67.21	-36	-36	Pass
NVNT	1-DH1	1000-2387	2377.29	-56.96	-26	-26	Pass
NVNT	1-DH1	2387-2400	2399.22	-51.75	-16	-16	Pass
NVNT	1-DH1	2483.5-2496.5	2484.73	-57.09	-16	-16	Pass
NVNT	1-DH1	2496.5-13000	4817.77	-27.07	-26	-26	Pass

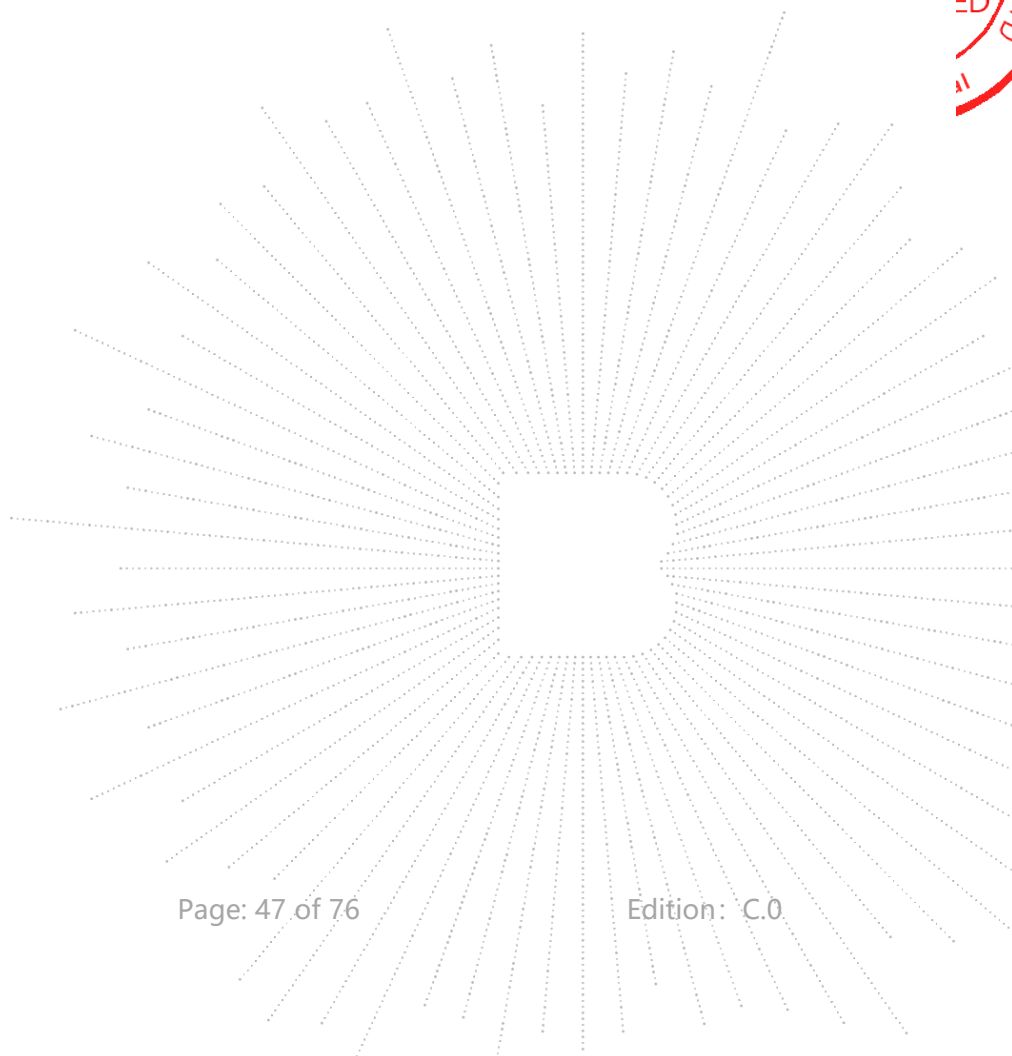


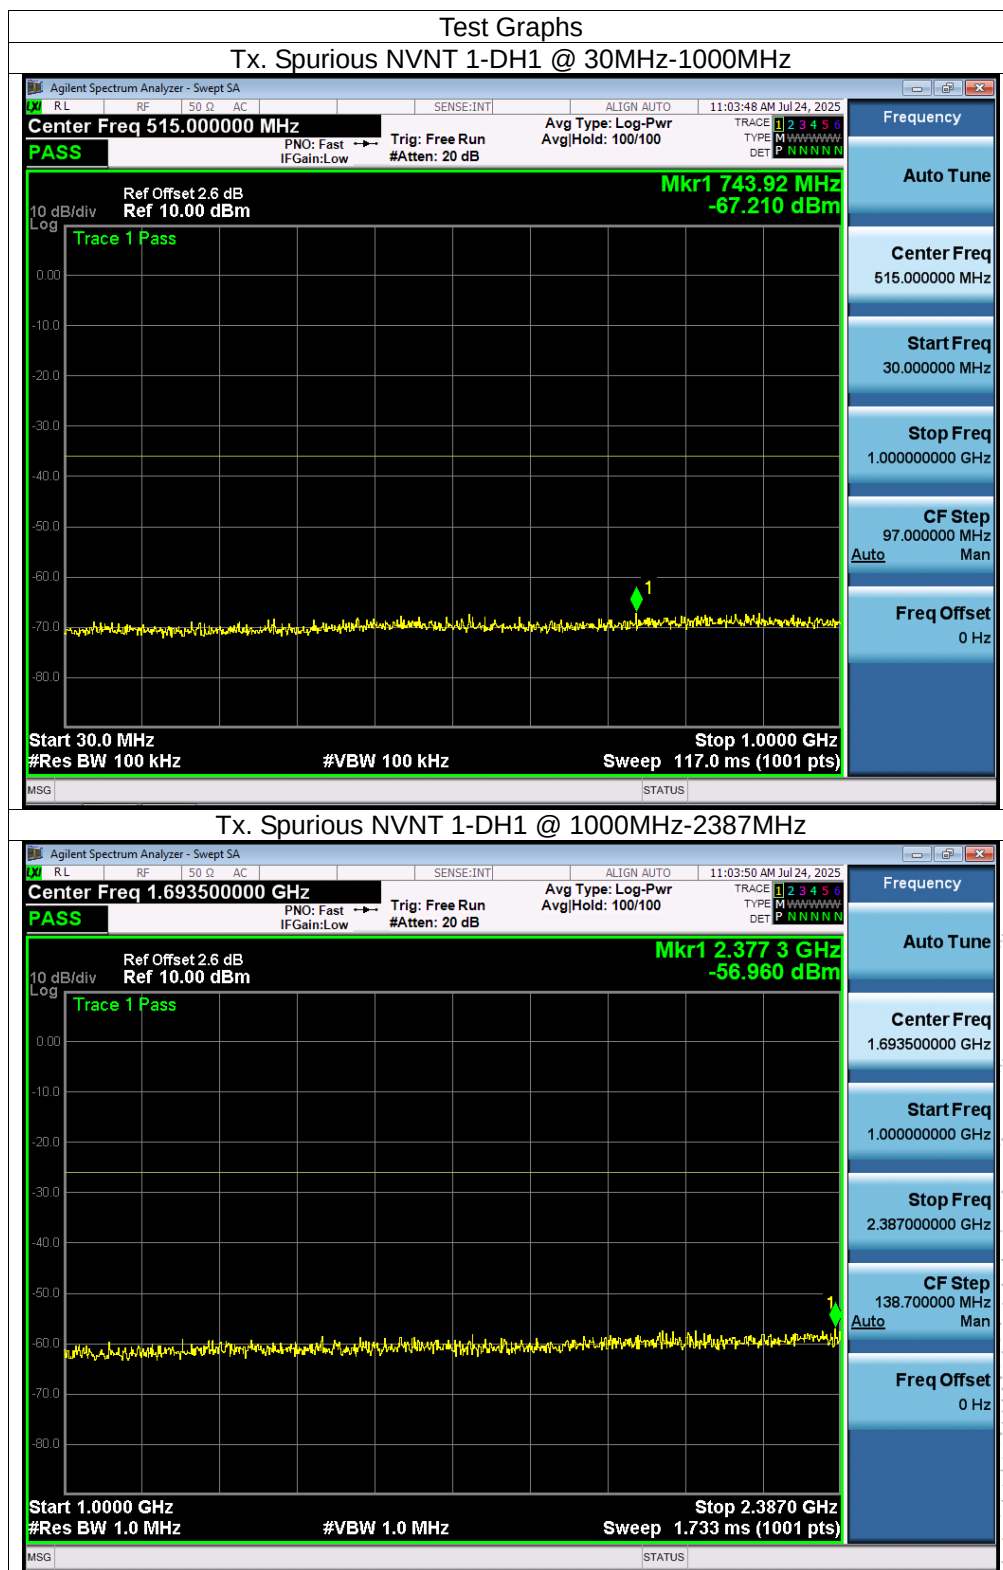

CO. LTD

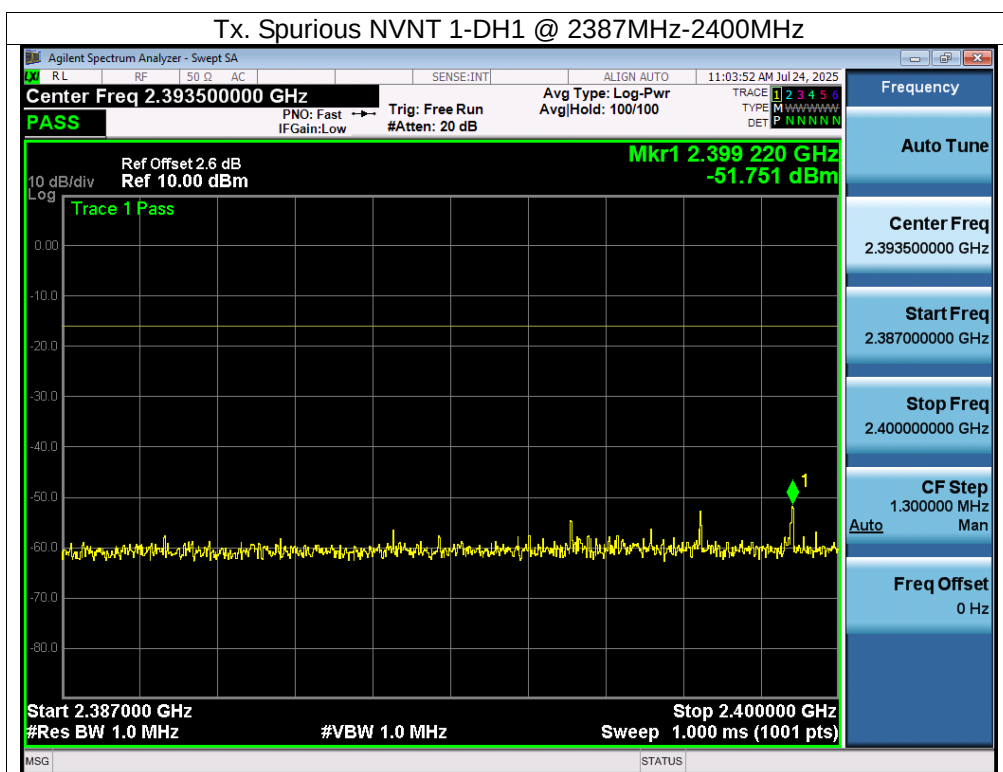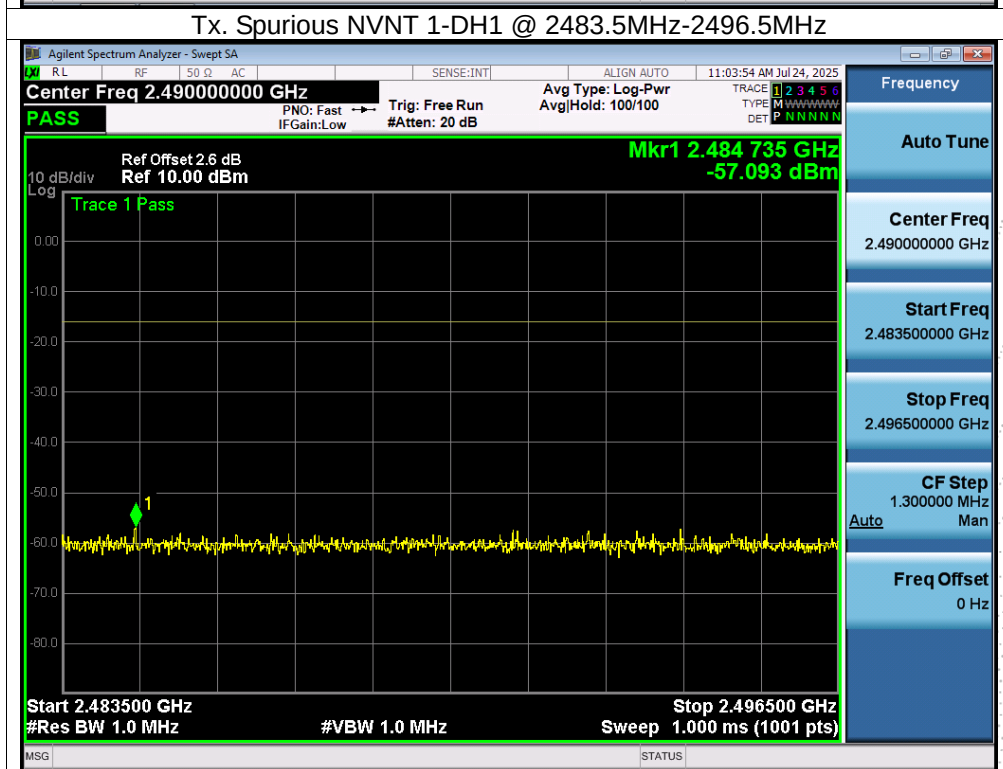


CHENZHEN

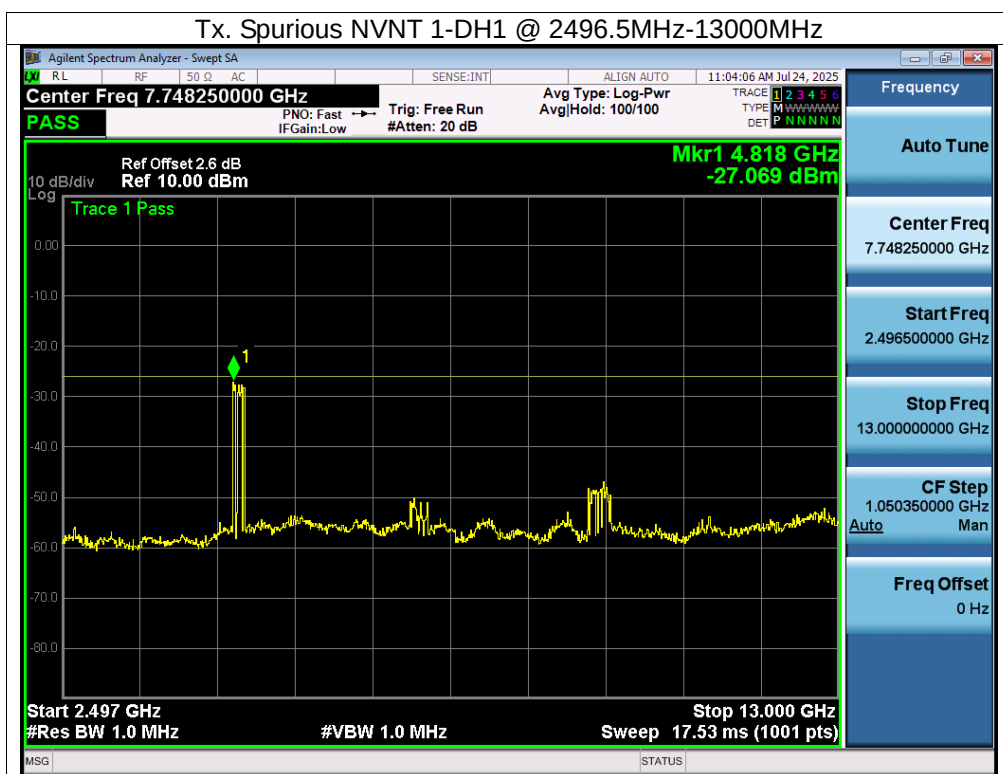

11. Radio Interference Prevention Capability Measurement

11.1 Block Diagram Of Test Setup

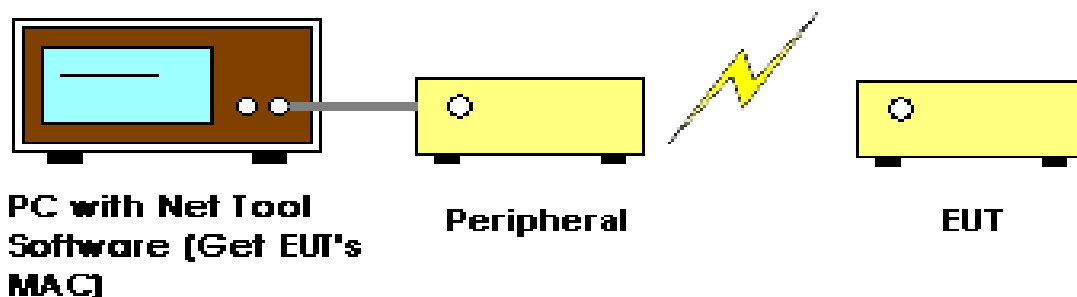

11.2 Limit

Item	Limits
Identification code	≥ 48 bits

11.3 Measuring Instruments And Setting

Item	Limits
MAC IP List	MAC Scan

11.4 Test Procedure

1. In the case that the EUT has the function of automatically transmitting the identification code:
 - a. Transmit the predetermined identification codes form EUT.
 - b. Check the transmitted identification codes with the demodulator.
2. In the case of receiving the identification ocde:
 - a. Transmit the predetermined identification codes form the counterpart.
 - b. Check if communication is normal.
 - c. Transmit the signals other than predetermined ID codes form the counterpart.
 - d. check if the EUT stops the transmission, or if it displays that idnetification codes are different from the predetermined ones.


11.5 Test Result

Temperature:	26°C		
Humidity:	54 % RH	Test Voltage	DC 3.7V

1. Bluetooth Device Address: 57-2d-b1-b8-e8-da
2. Test result: PASS

12. Dwell Time

12.1 Block Diagram Of Test Setup

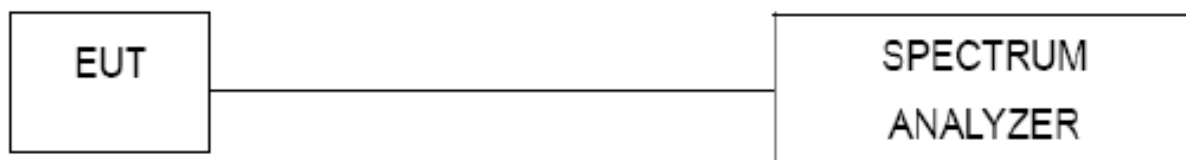

12.2 Limit

Item	Limits
Hopping Freq. Dwell Time	$\leq 0.4 \text{ sec (In } 0.4 \text{ sec} \times \text{ spreading rate)}$

12.3 Measuring Instruments And Setting

Please refer to section 5 in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	0 Hz
RB	1 MHz
VB	1 MHz
Detector	Peak
Trace	Max Hold
Sweep	Continuous

12.4 Test Procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer
2. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
3. Use a video trigger with the trigger level set to enable triggering only on full pulses.
4. Sweep Time is more than once pulse time.
5. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
6. Measure the maximum time duration of one single pulse.
7. Set the EUT for DH5, DH3 and DH1 packet transmitting.
8. Measure the maximum time duration of one single pulse.

12.5 Test Result


Temperature:	26°C		
Humidity:	54 % RH	Test Voltage	DC 3.7V


Condition	Mode	Frequency (MHz)	Spreading Bandwidth (MHz)	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	72.061	0.393	114.363	291	28824.4	400	Pass
NVNT	1-DH3	2441	72.015	1.648	250.496	152	28806.0	400	Pass
NVNT	1-DH5	2441	72.019	2.896	269.328	93	28807.6	400	Pass
NVNT	2-DH1	2441	72.042	0.402	116.580	290	28816.8	400	Pass
NVNT	2-DH3	2441	71.901	1.639	240.933	147	28760.4	400	Pass
NVNT	2-DH5	2441	71.851	2.886	268.398	93	28740.4	400	Pass
NVNT	3-DH1	2441	71.853	0.402	116.580	290	28741.2	400	Pass
NVNT	3-DH3	2441	72.068	1.651	237.744	144	28827.2	400	Pass
NVNT	3-DH5	2441	71.686	2.902	264.082	91	28674.4	400	Pass



Note:

Period Time= Spreading Bandwidth *0.4



Dwell Time= Pulse Time* Burst Count


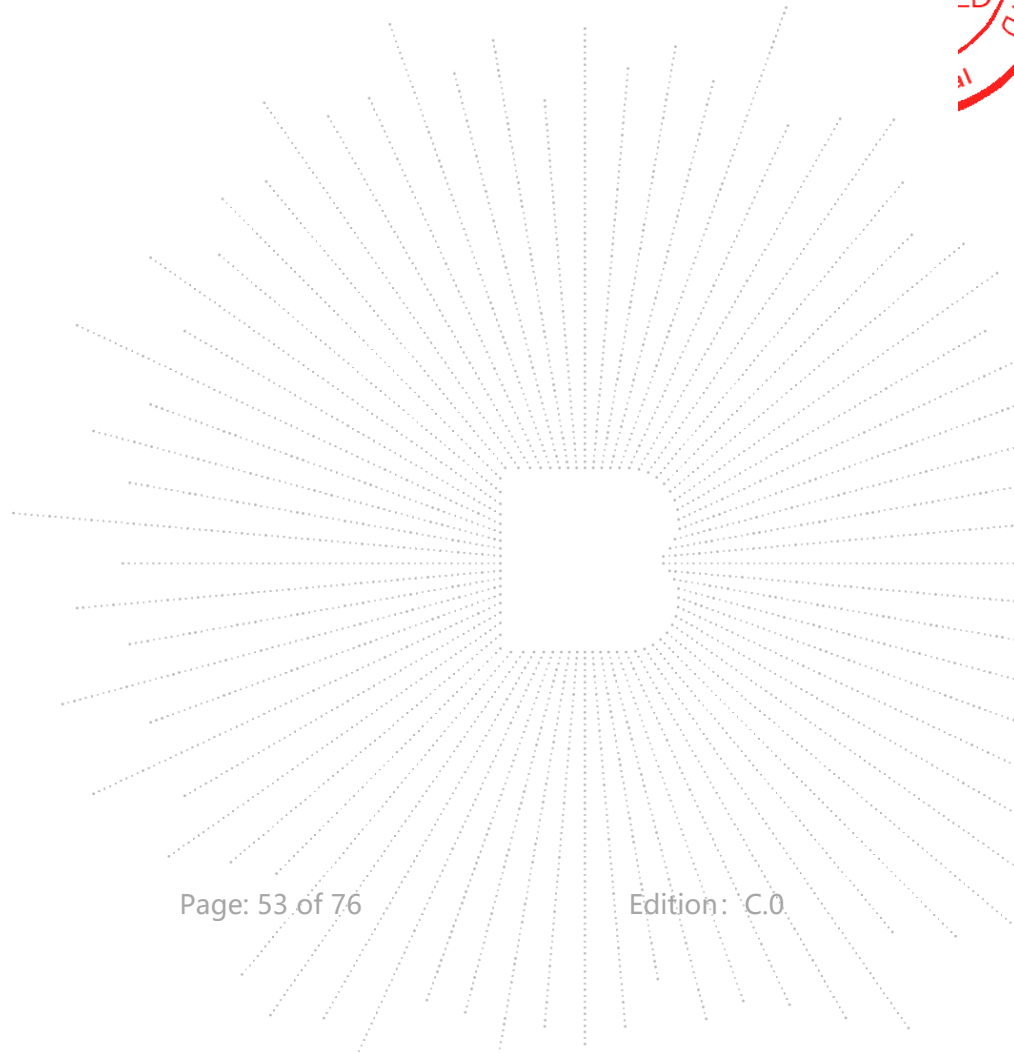


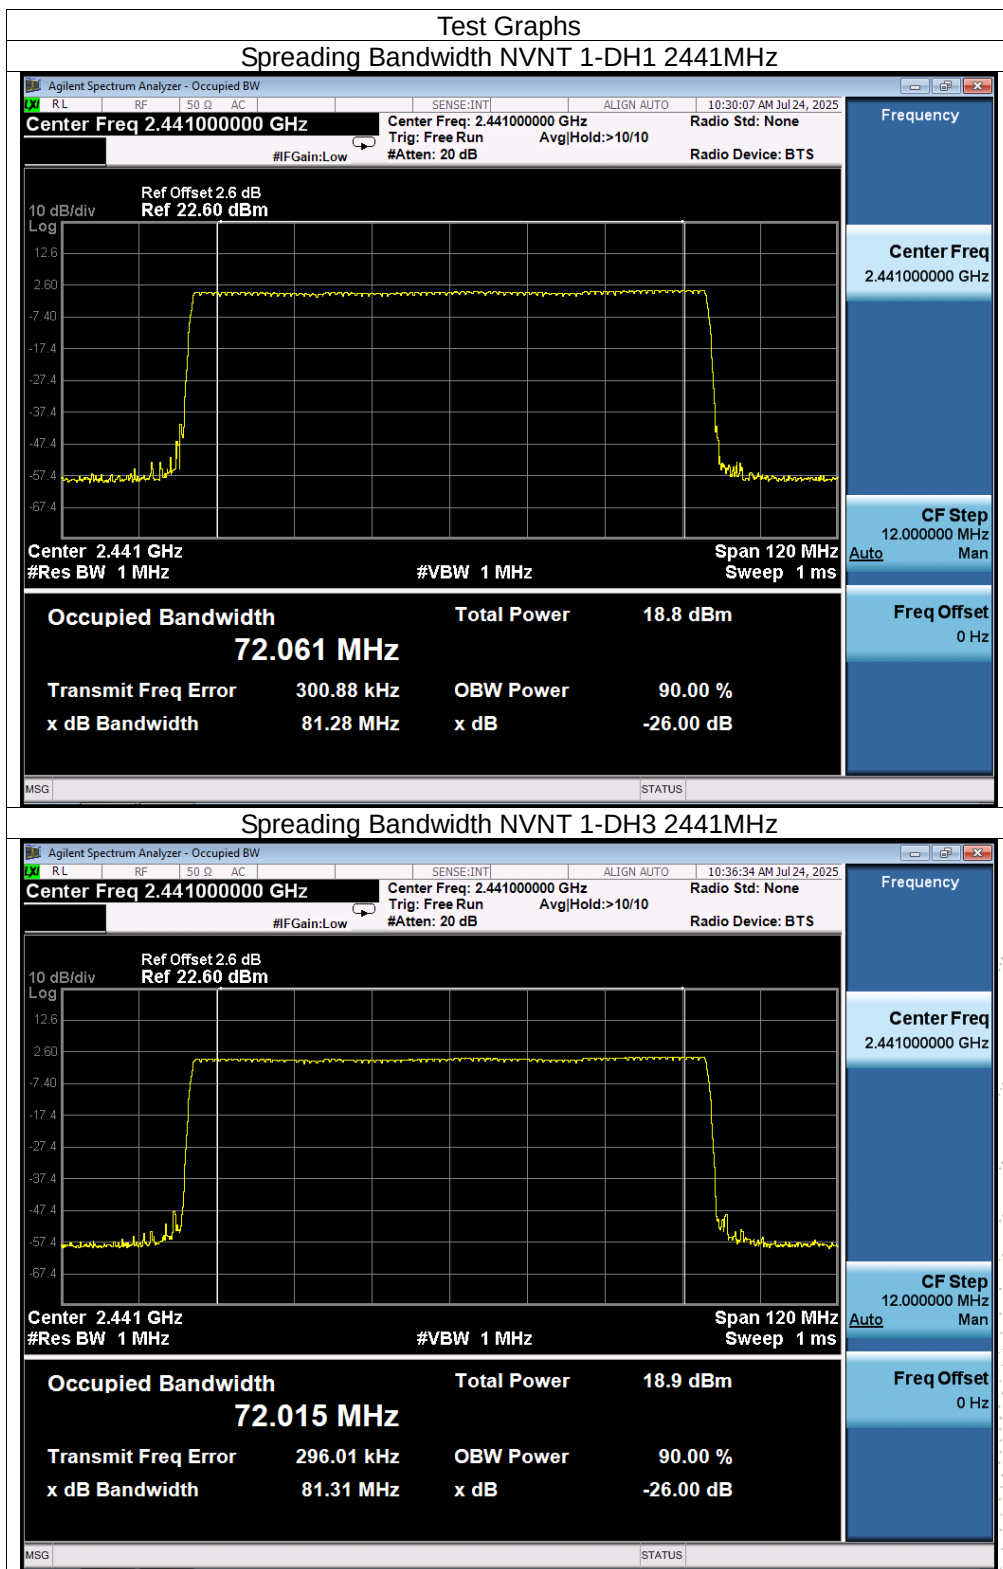


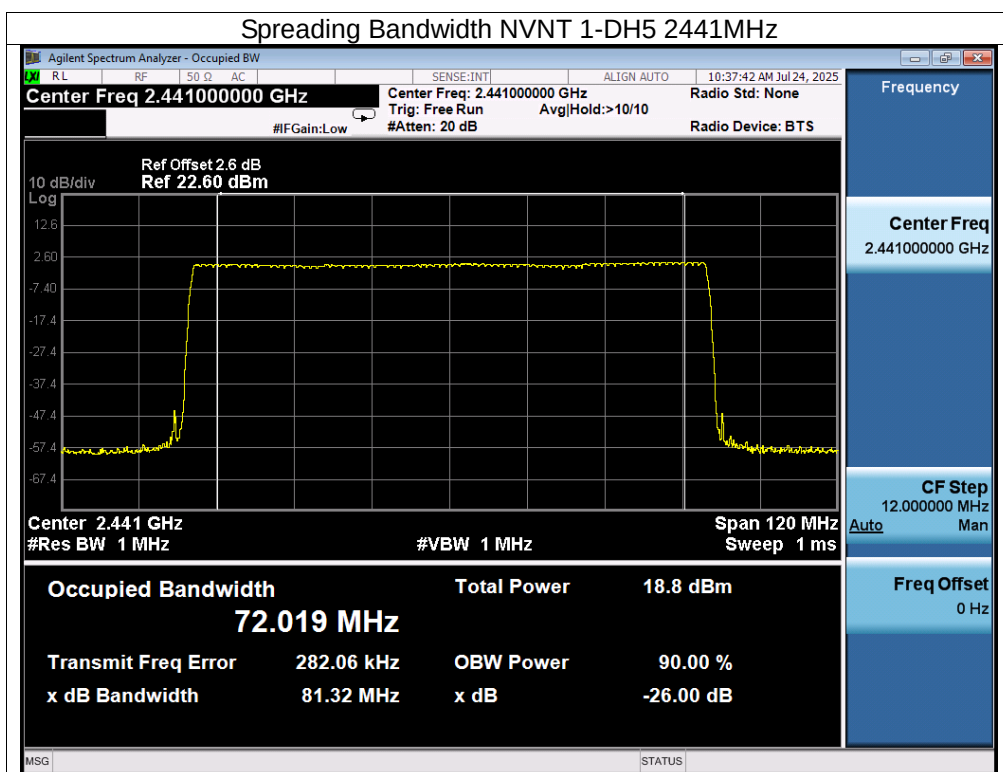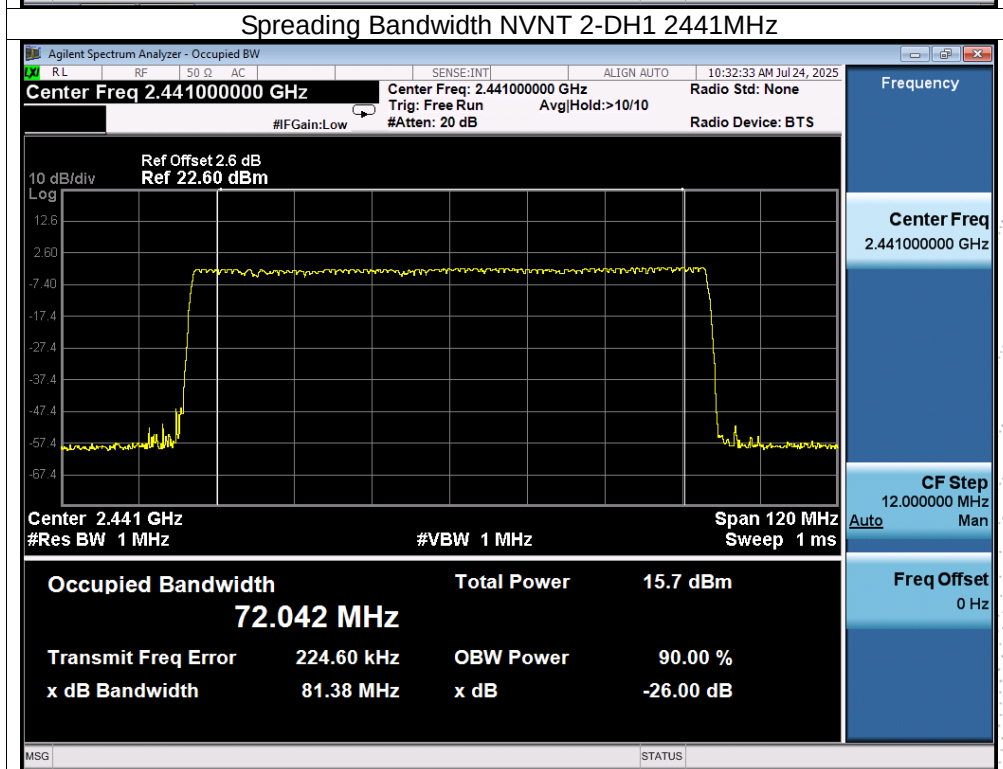



SHENZHEN

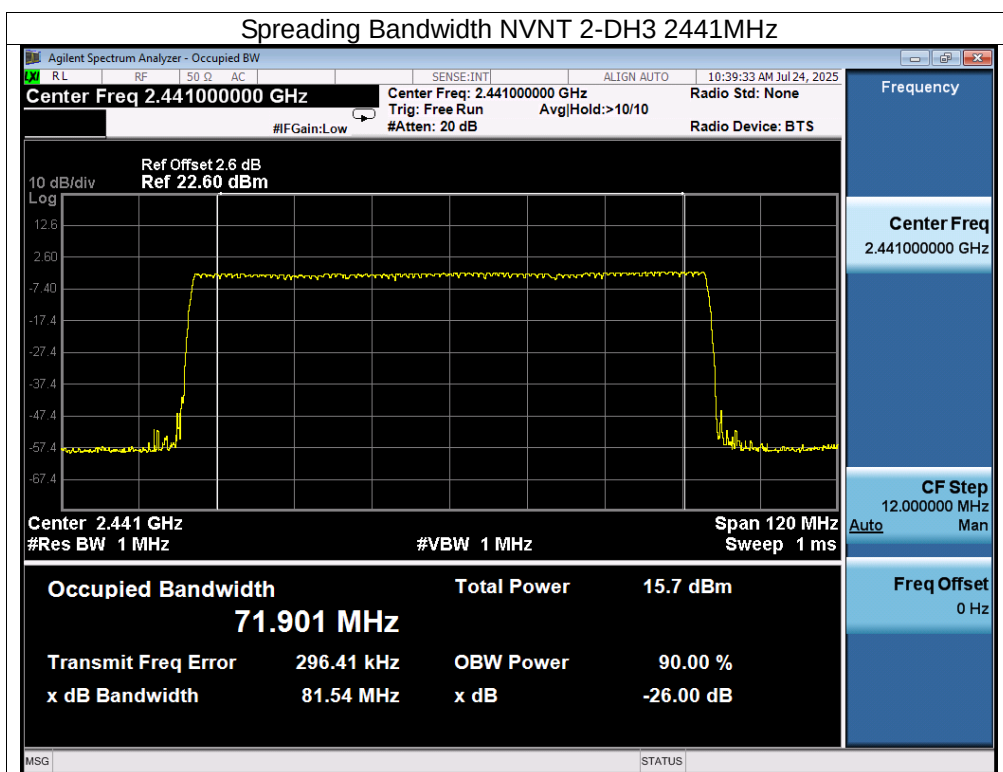
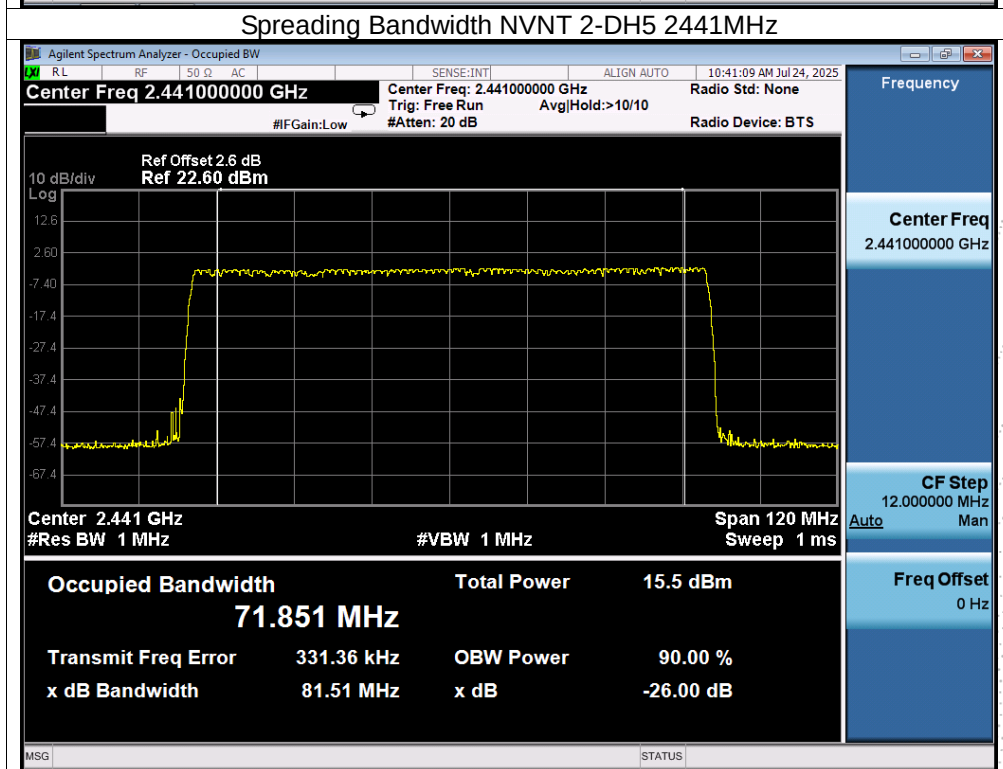


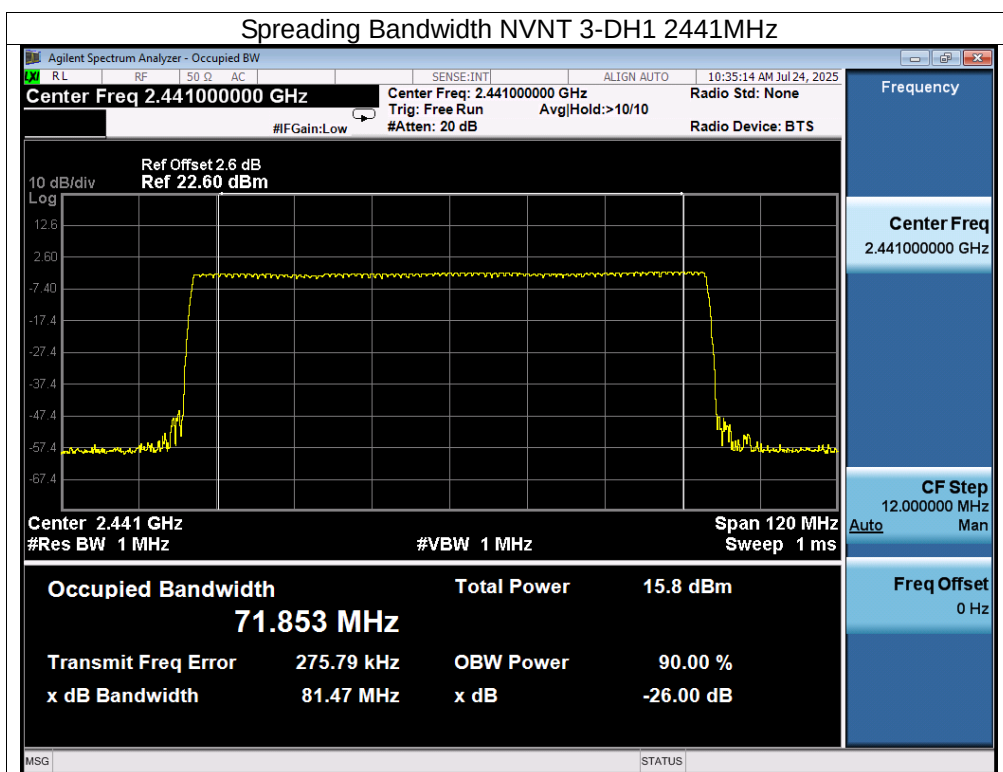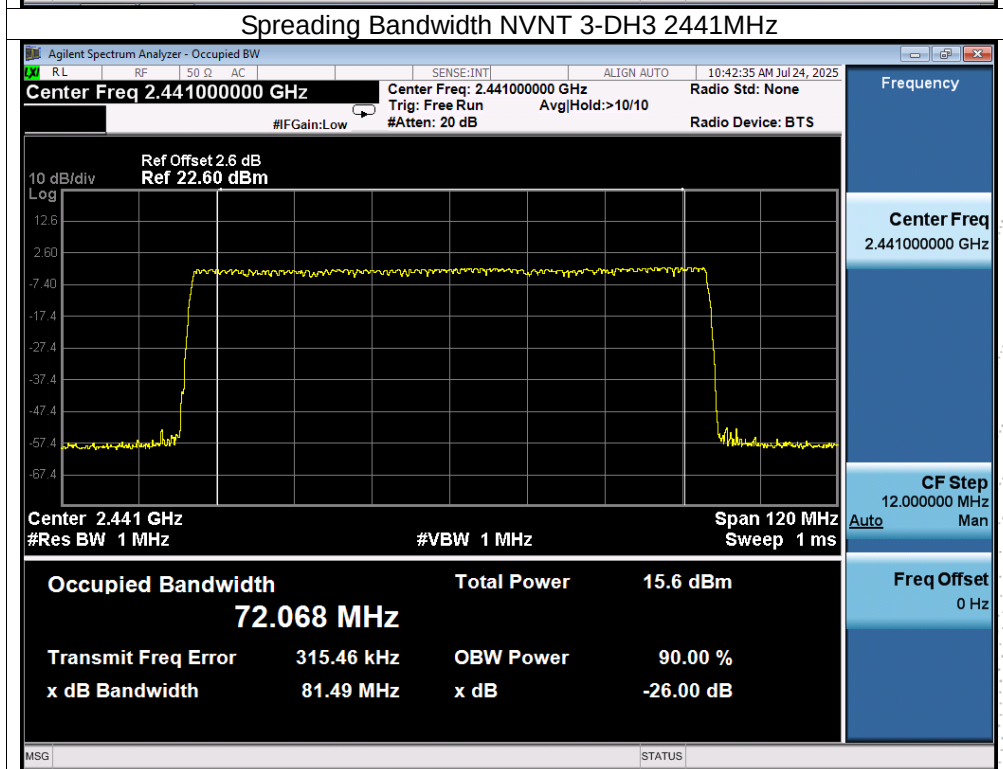


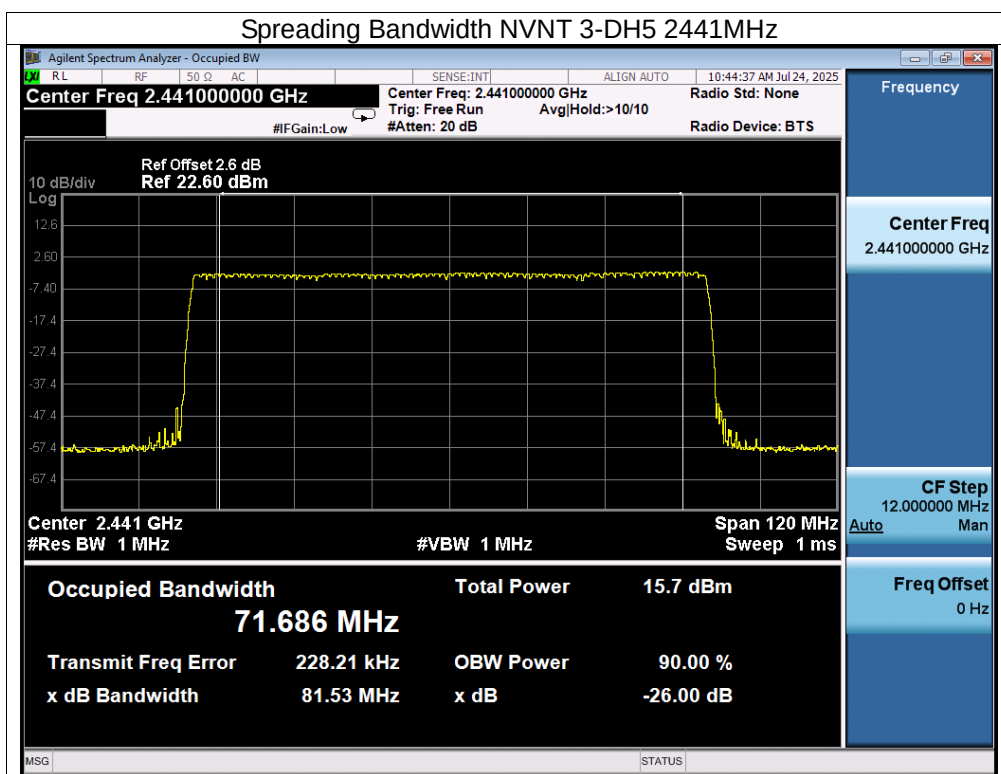


TE
 TO
 OVE
 t Sea

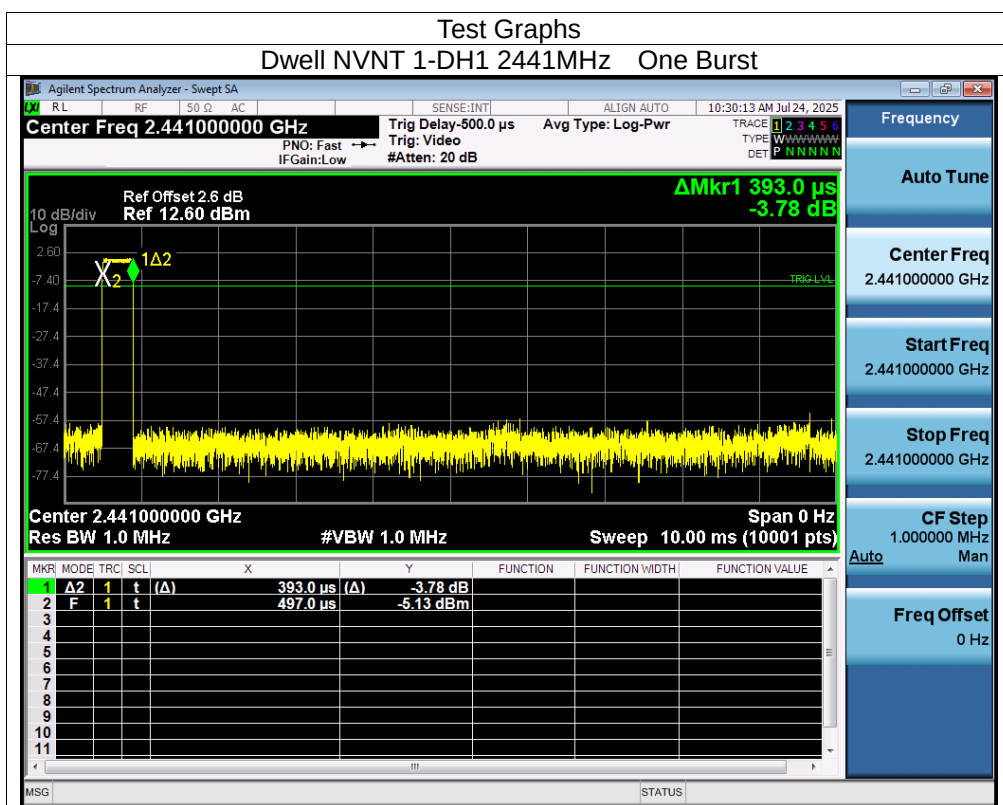
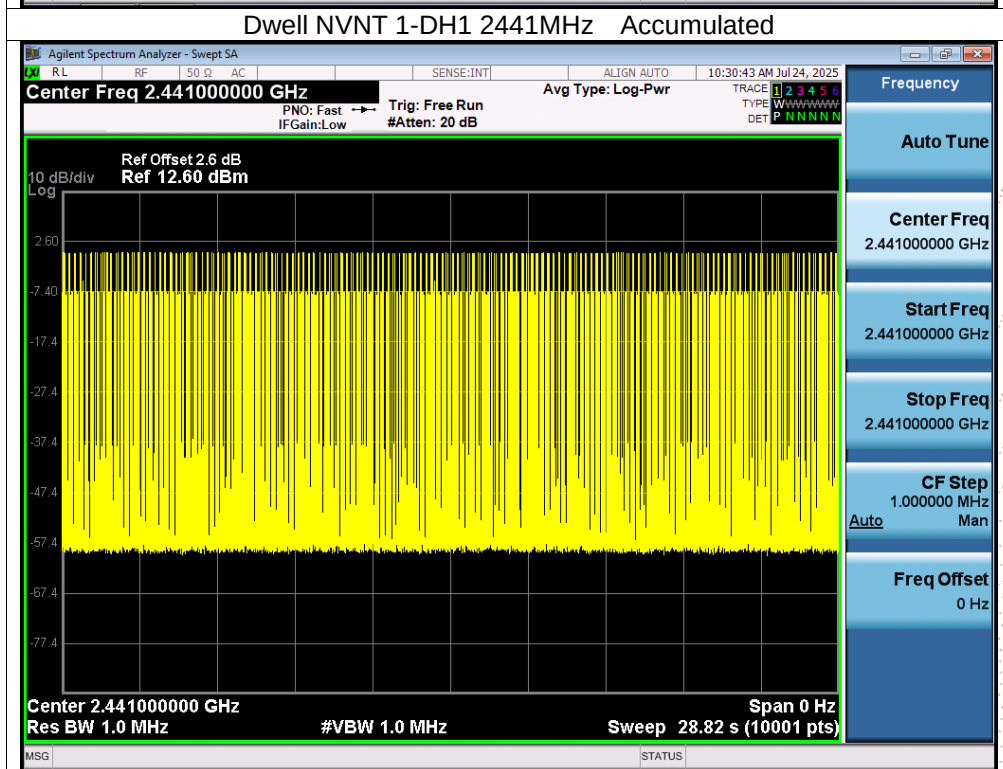


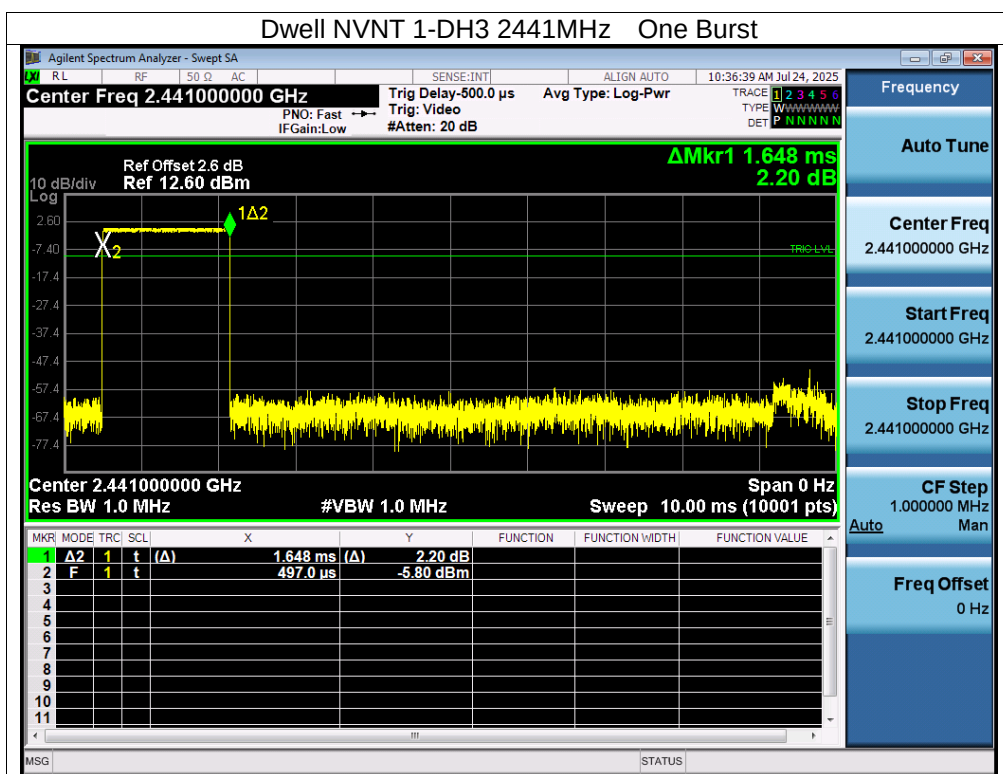
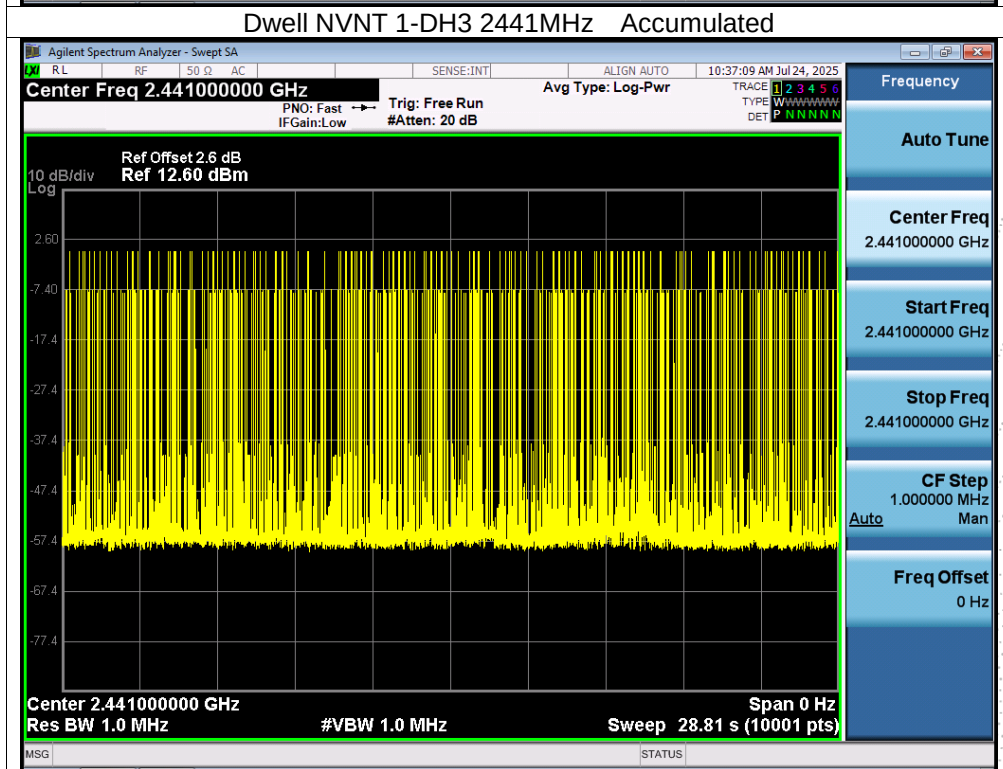




CO. LTD.

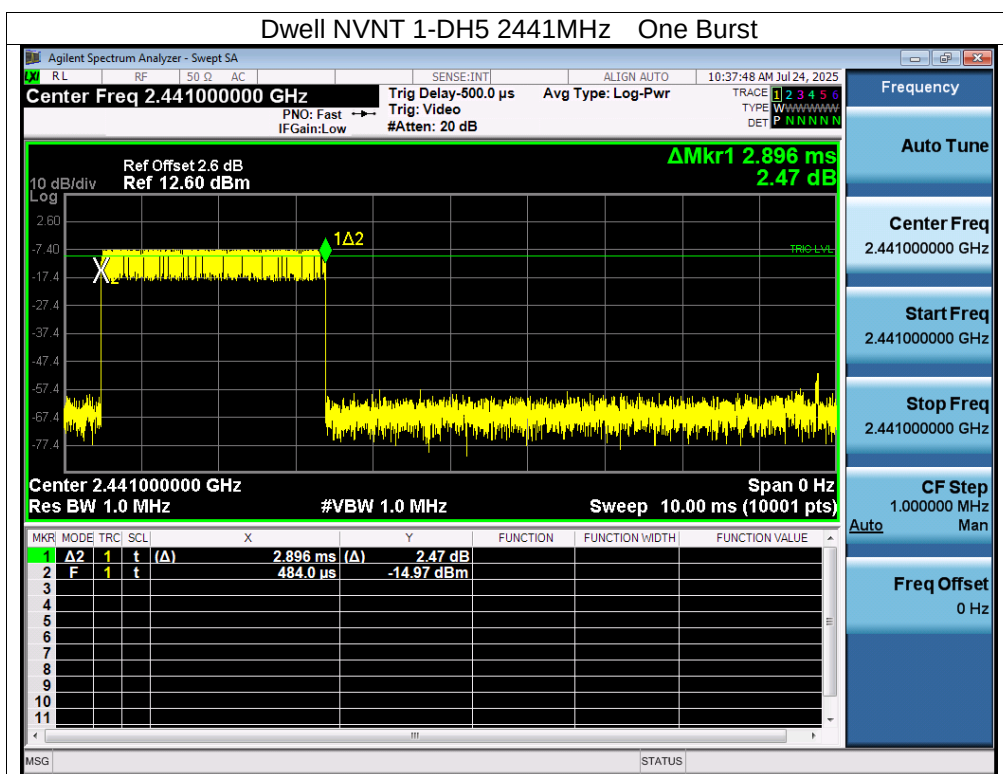
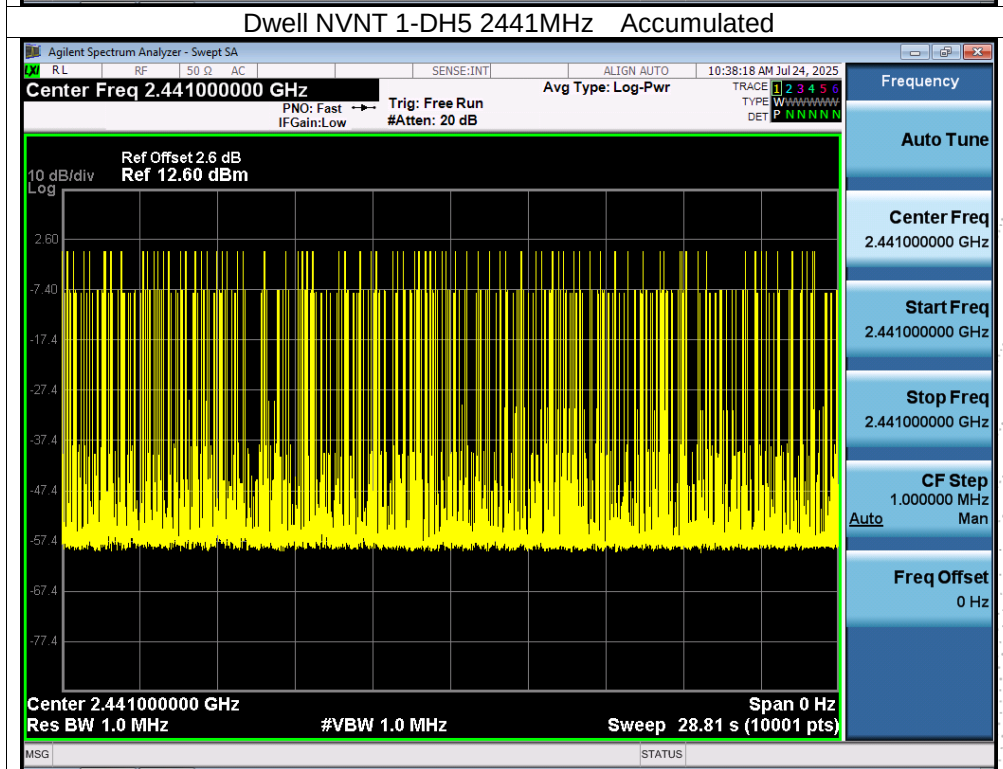




SHENZHEN

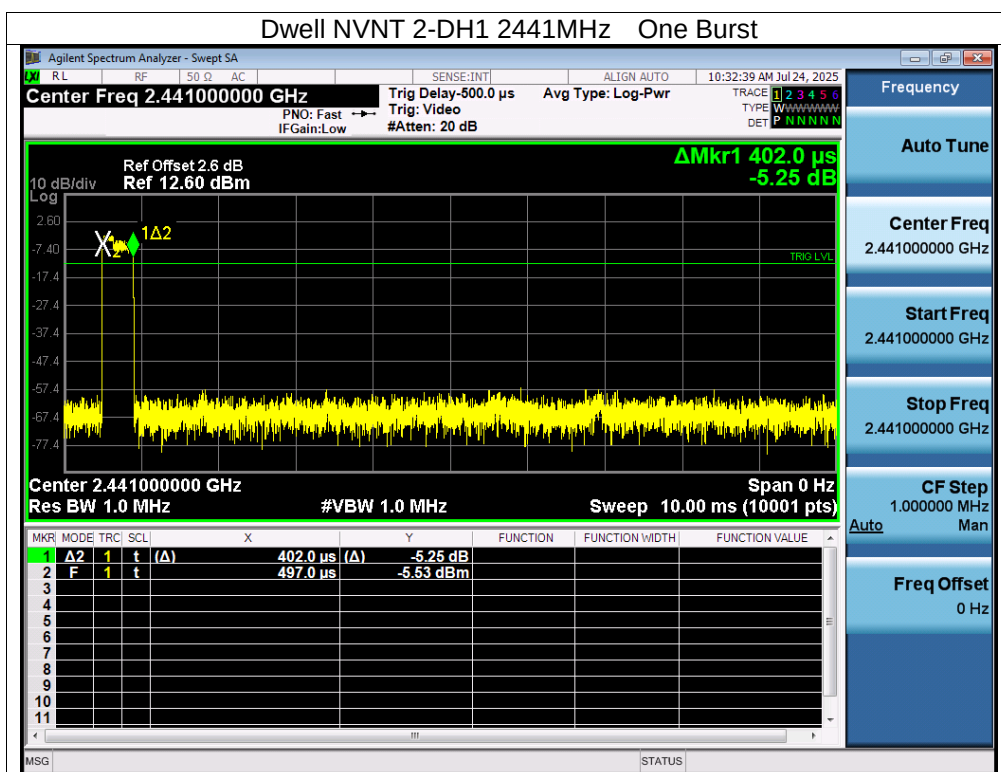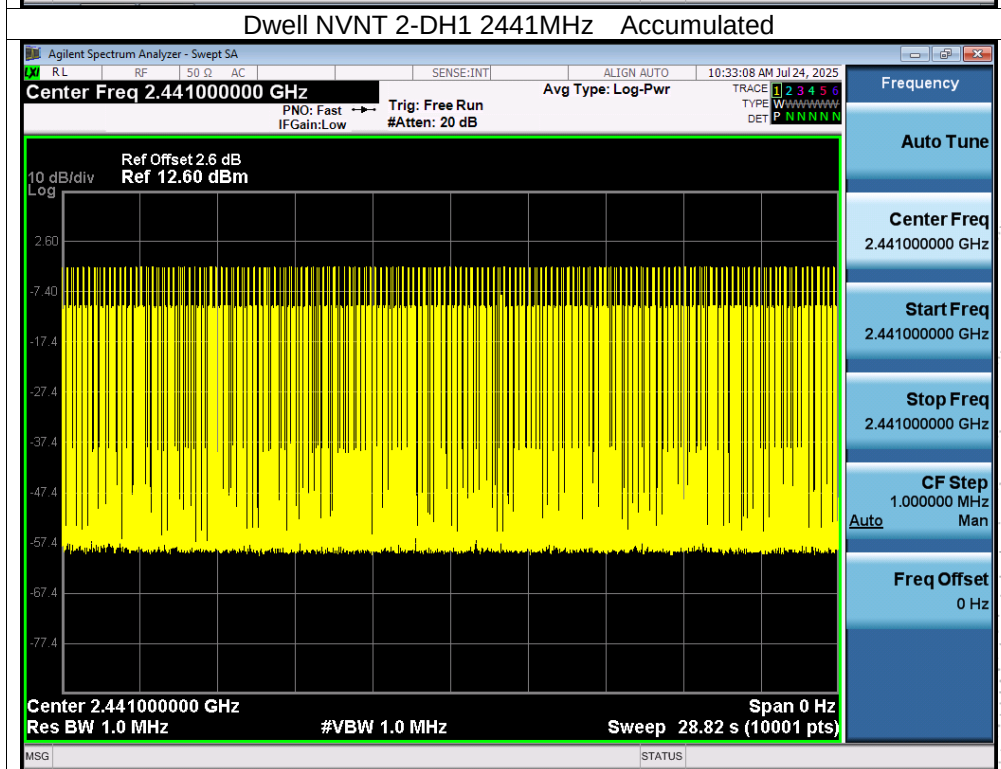

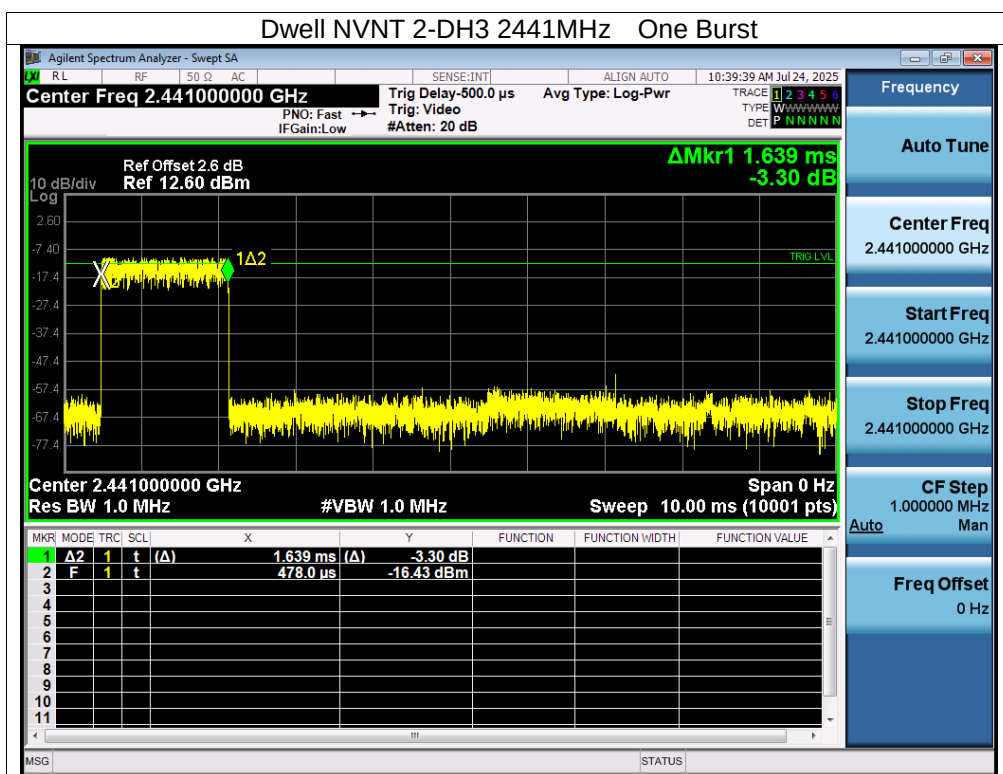
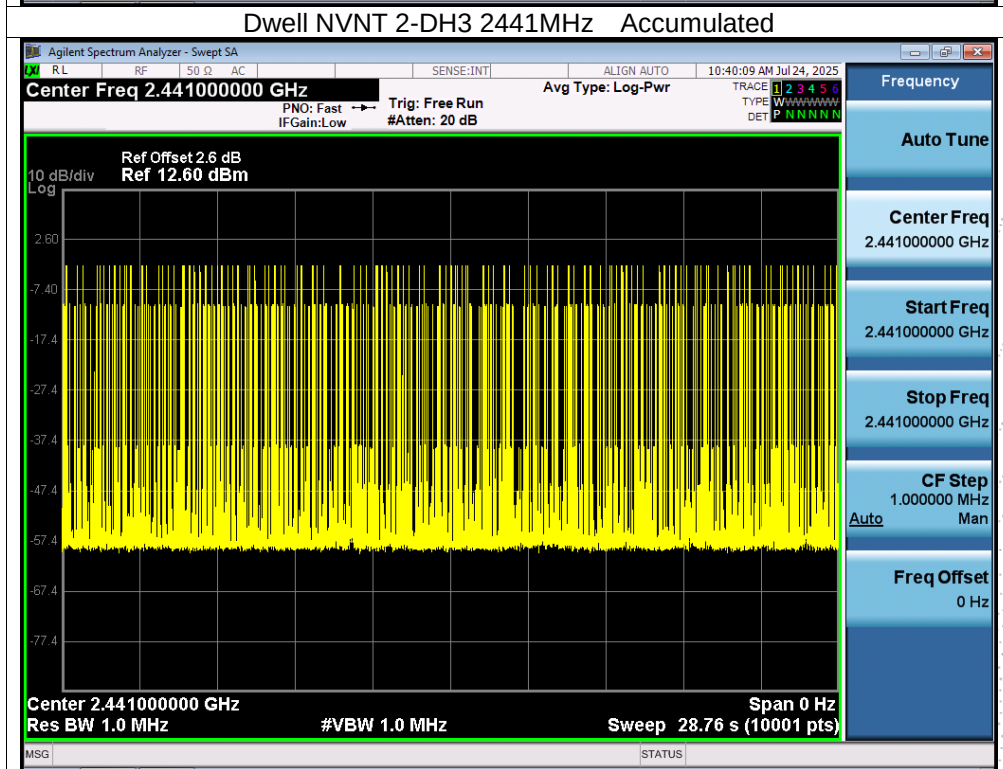


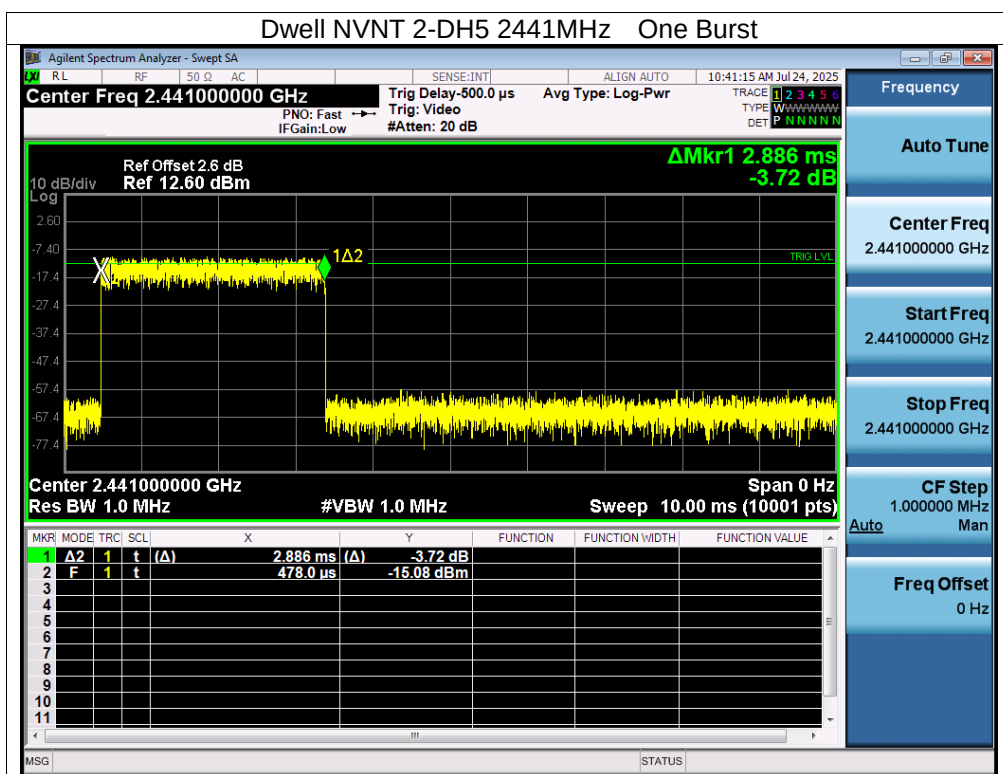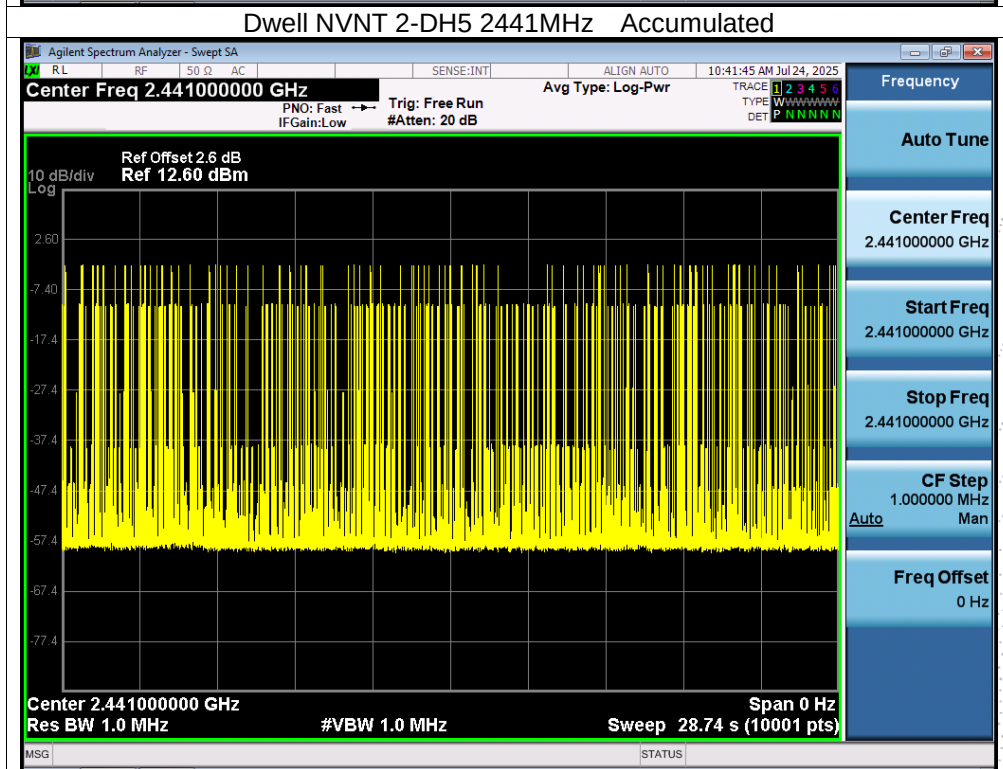

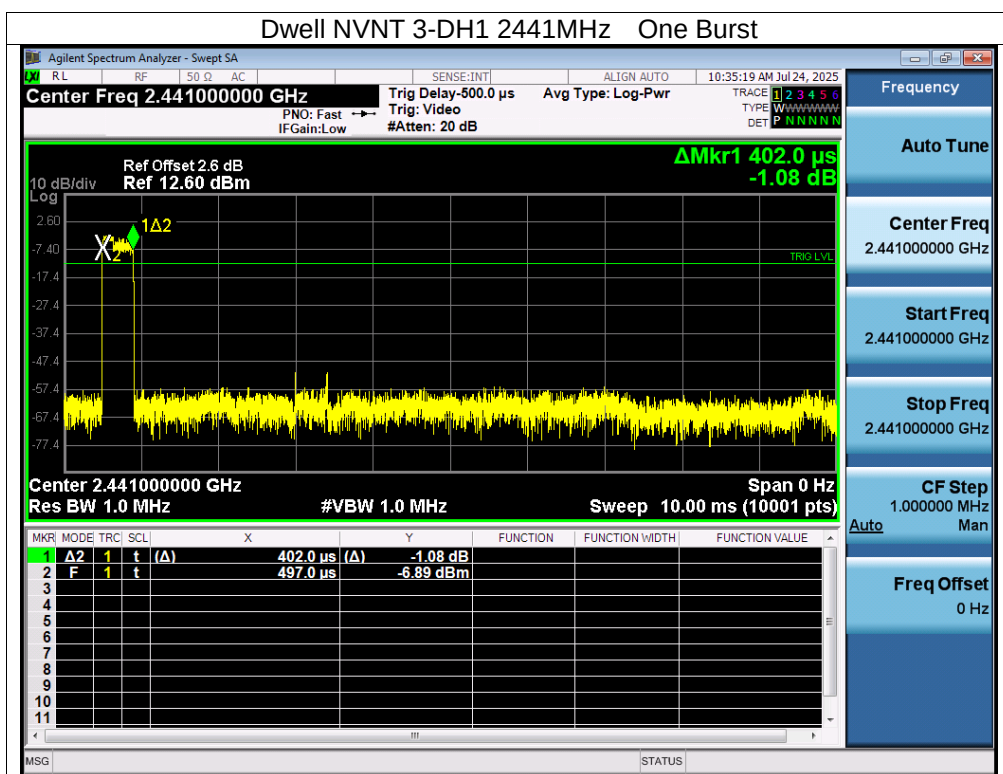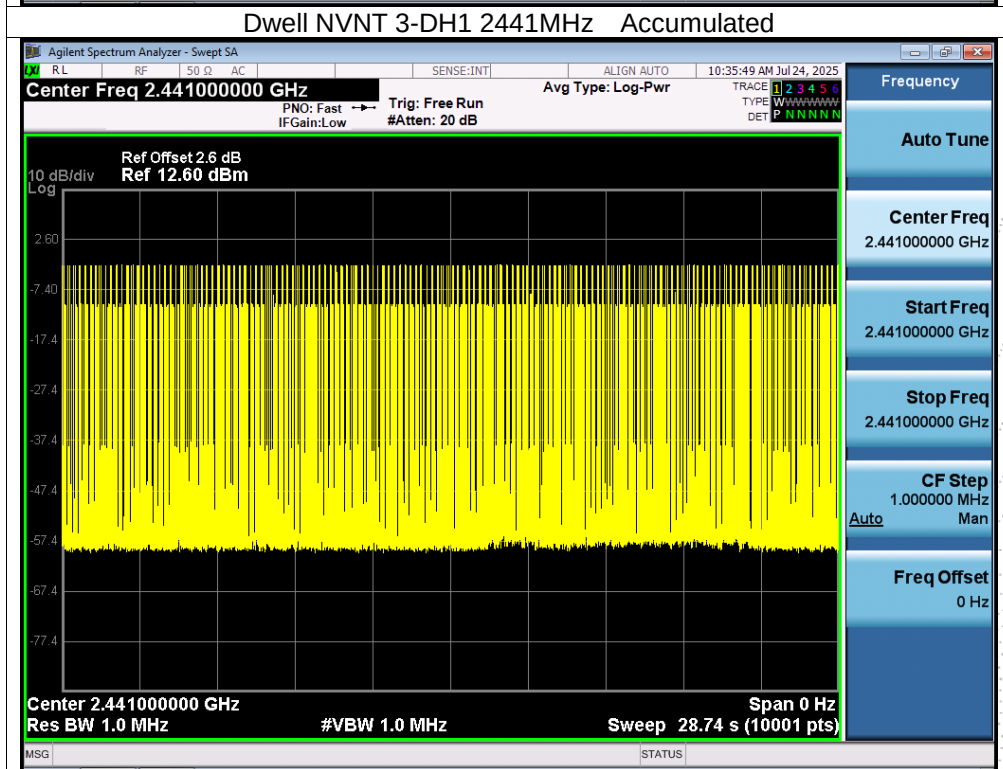

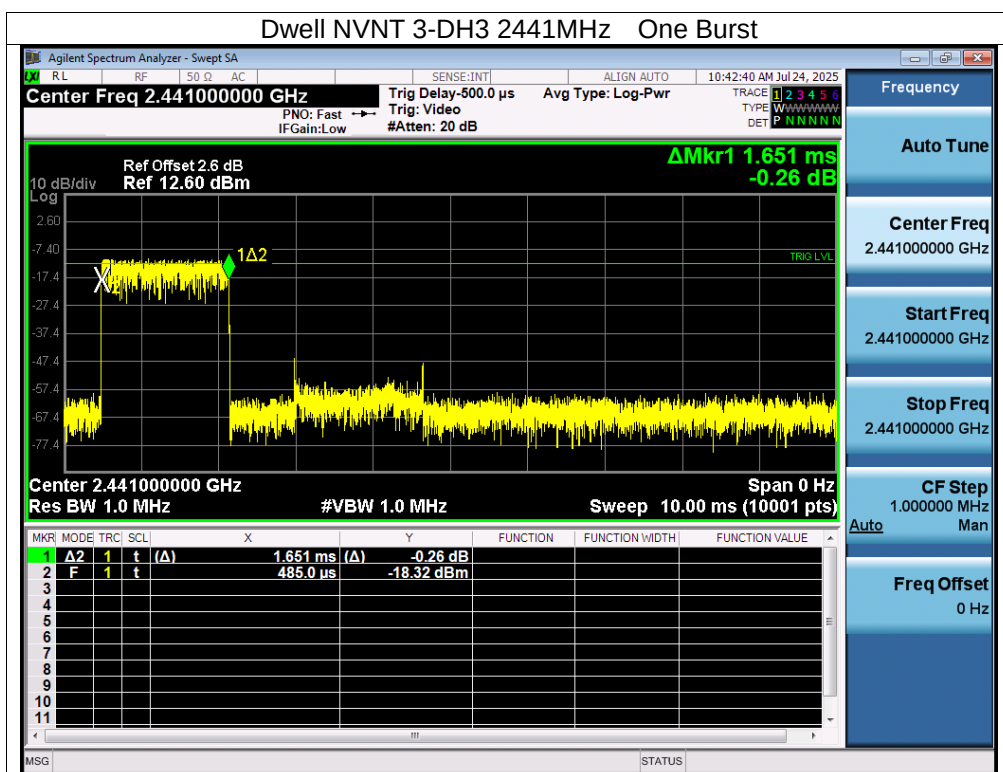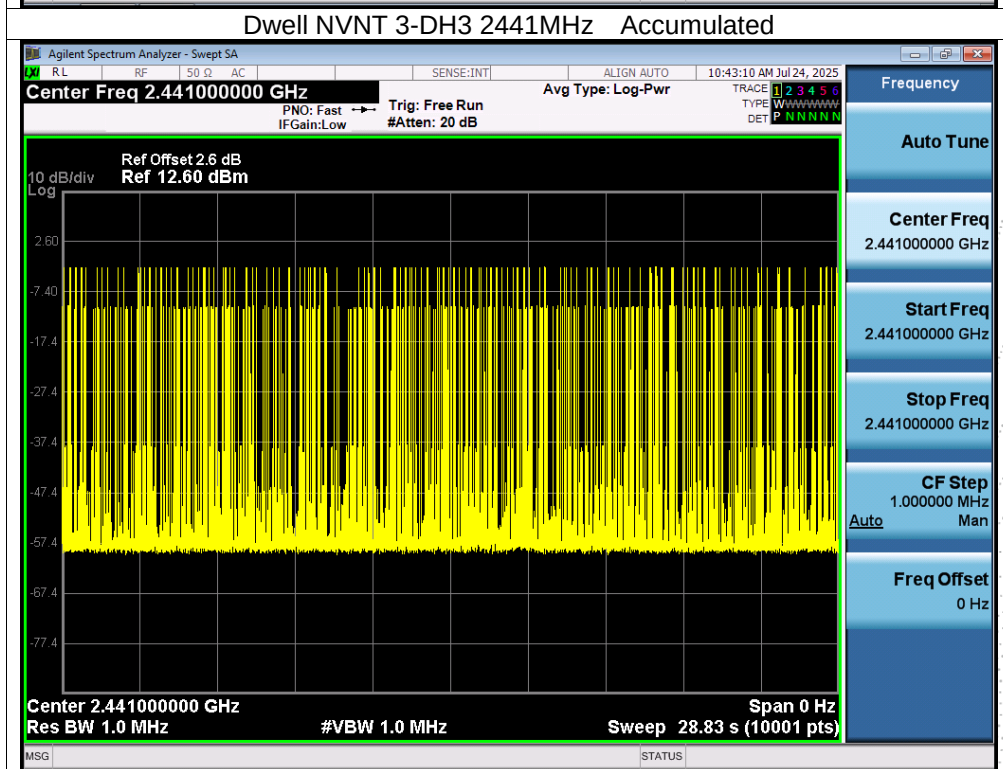

CO. LTD.

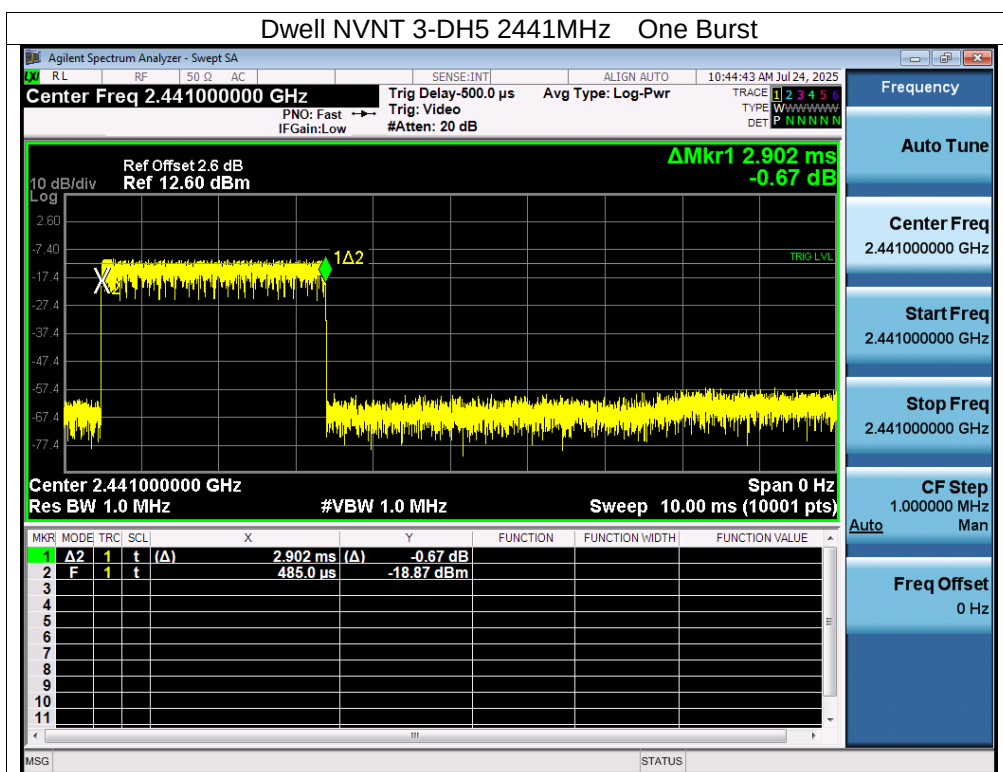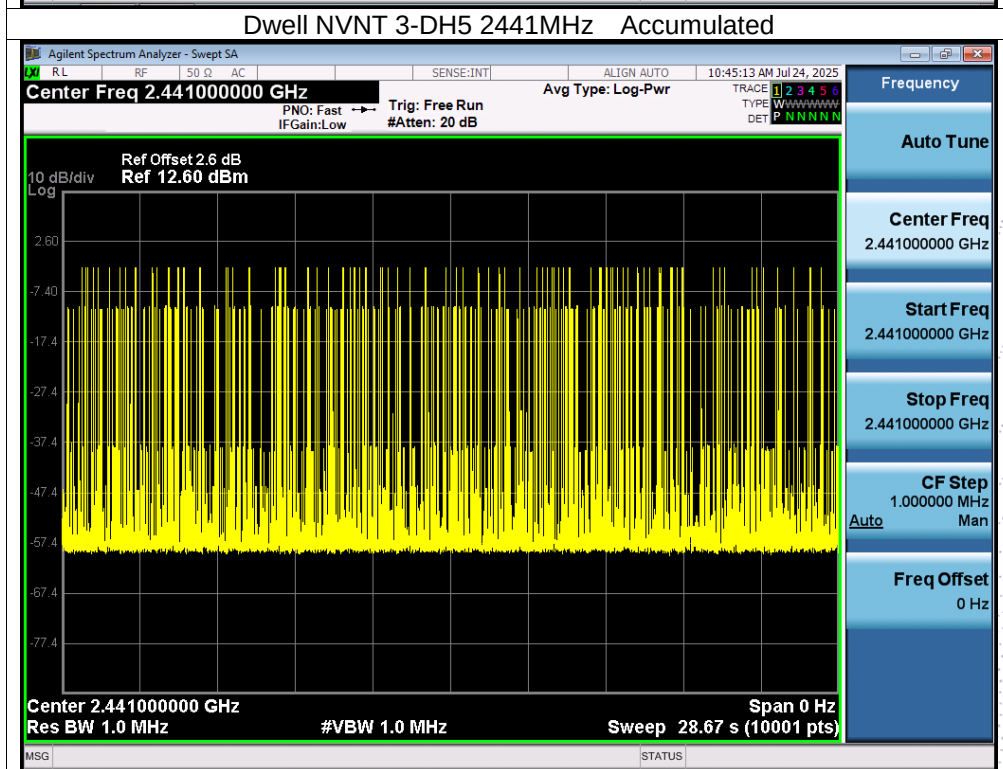


13. Carrier Sense

Not applicable, Since the EUT belong to Bluetooth



14. Imitation Of Collateral Emission Of Receiver Measurement

14.1 Block Diagram Of Test Setup

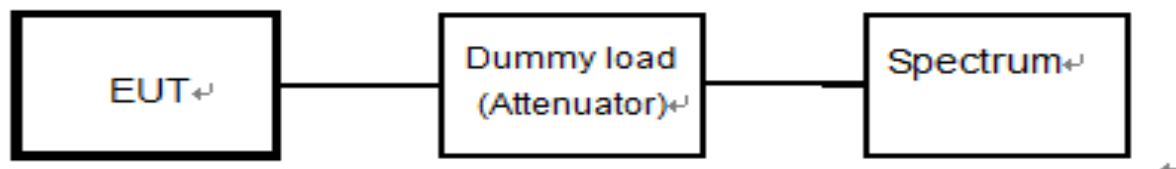

14.2 Limit

Item	Limits
RX Spurious Emission:	$\leq 4\text{nW}$ (-54dBm) ($f < 1\text{GHz}$)
	$\leq 20\text{nW}$ (-47dBm) ($1\text{GHz} \leq f$)

14.3 Measuring Instruments And Setting

Please refer to section 5 in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
RB	100 kHz (below 1GHz emissions) 1 MHz (above 1GHz emissions)
VB	100 kHz (below 1GHz emissions) 1 MHz (above 1GHz emissions)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

14.4 Test Procedure


- EUT have the continuous reception mode and fixed only one channelize.
- Setting of SA is following as RB / VB: 100 kHz (below 1GHz emissions) / 1 MHz (above 1GHz emissions) / AT: 6dB / Ref: -20dBm / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold
- SA set RB: 100kHz and VB: 100kHz. Then adjust to start frequency 30MHz and stop frequency 1000MHz. Search to mark peak reading value + cable loss shall be less than 4nW
- SA set RB: 1MHz and VB: 1MHz. Then adjust to start frequency 1000MHz and stop frequency 12500MHz. Search to mark peak reading value + cable loss shall be less than 20nW
- If power level of lower emissions are more than 1/10 of limit (0.4nW for $f < 1\text{GHz}$, 2nW for $f \geq 1\text{GHz}$), all those are to be indicated in the 2nd and 3rd lines. If others are 1/10 or less more of the limit, no necessary to be indicated.


14.5 Test Result



Temperature:	26°C		
Humidity:	54 % RH	Test Voltage	DC 3.7V



Condition	Mode	Frequency (MHz)	Range (MHz)	Emission Frequency (MHz)	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	30-1000	847.71	-77.38	-54	Pass
NVNT	1-DH1	2402	1000-13000	2416	-54.52	-47	Pass
NVNT	1-DH1	2441	30-1000	951.5	-76.99	-54	Pass
NVNT	1-DH1	2441	1000-13000	2428	-57.6	-47	Pass
NVNT	1-DH1	2480	30-1000	843.83	-76.75	-54	Pass
NVNT	1-DH1	2480	1000-13000	12556	-62.61	-47	Pass

TE
TC
OVE
t Sea

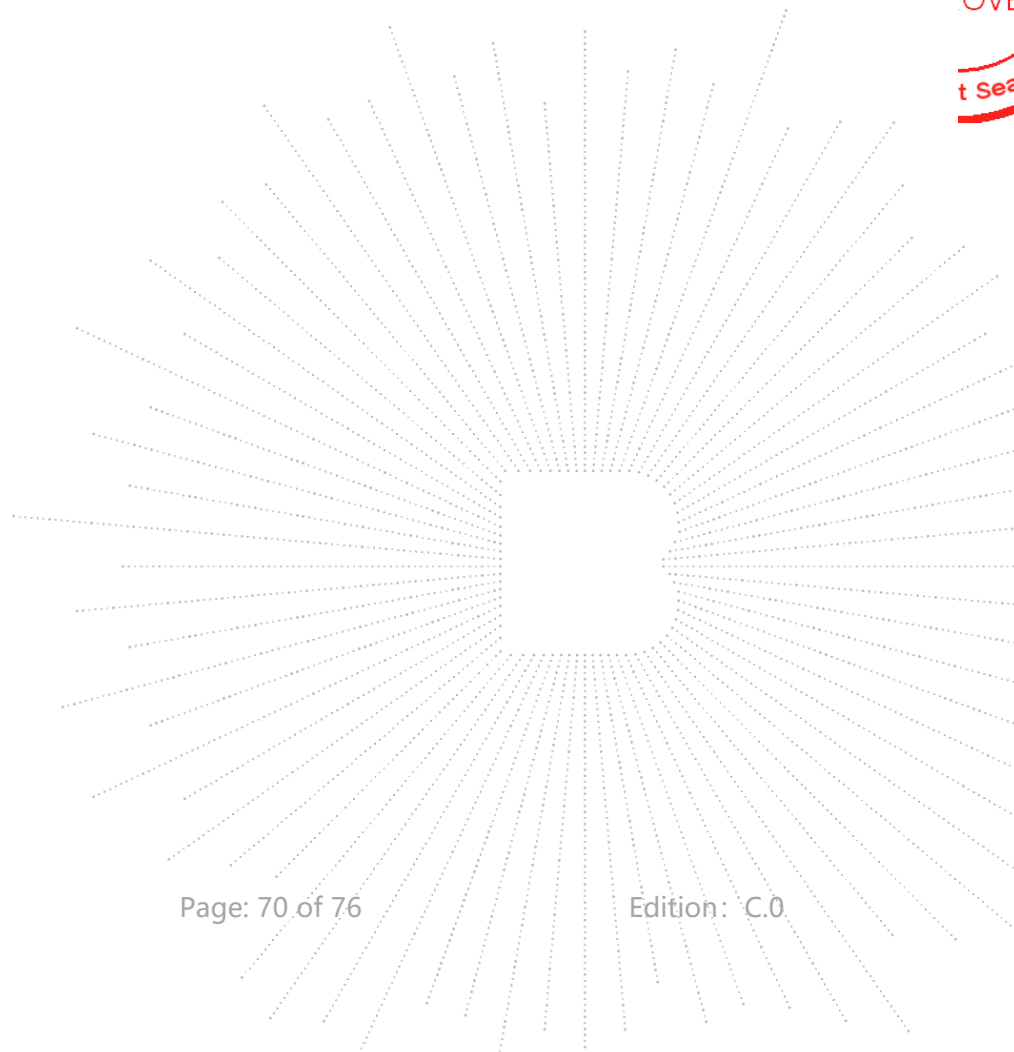

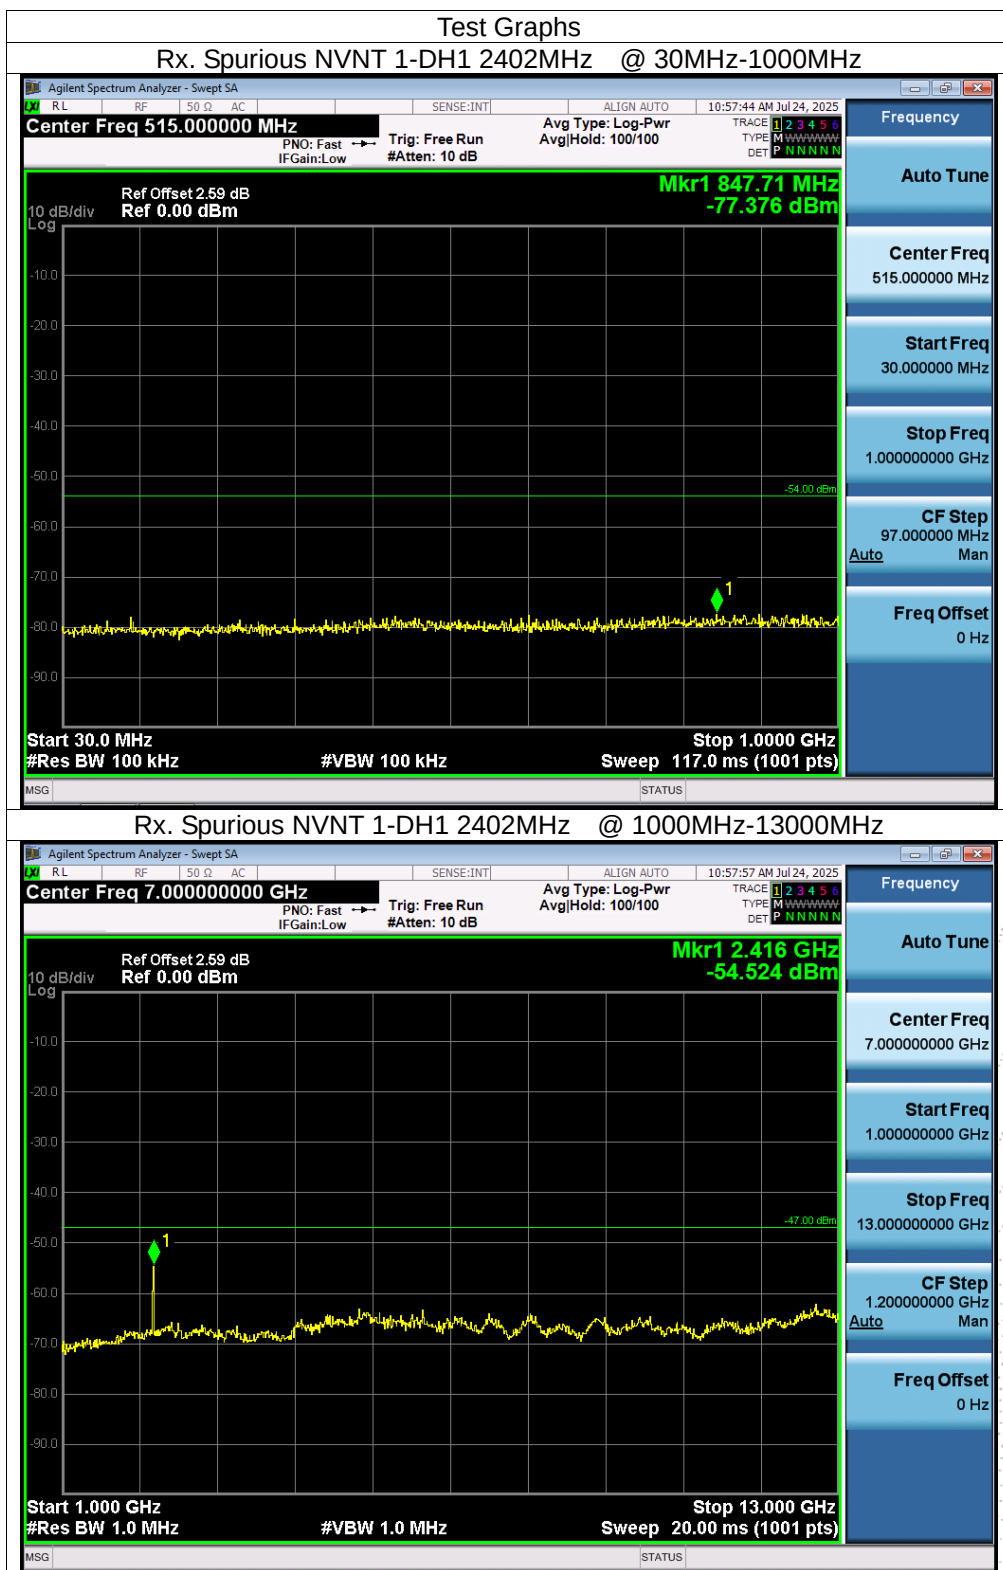

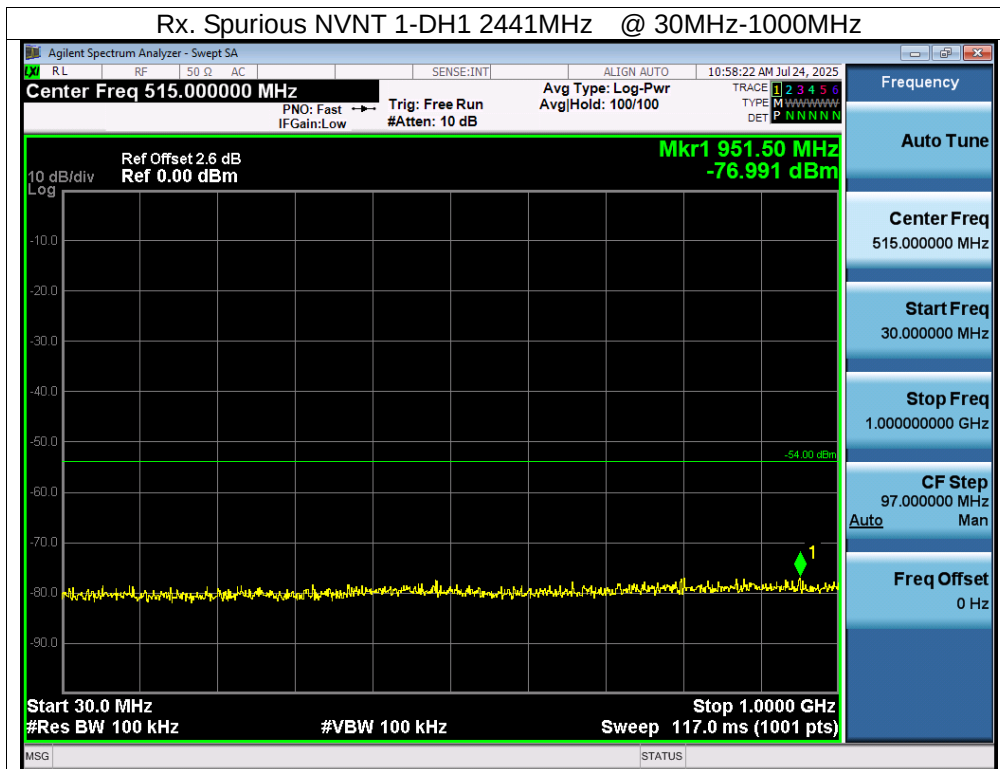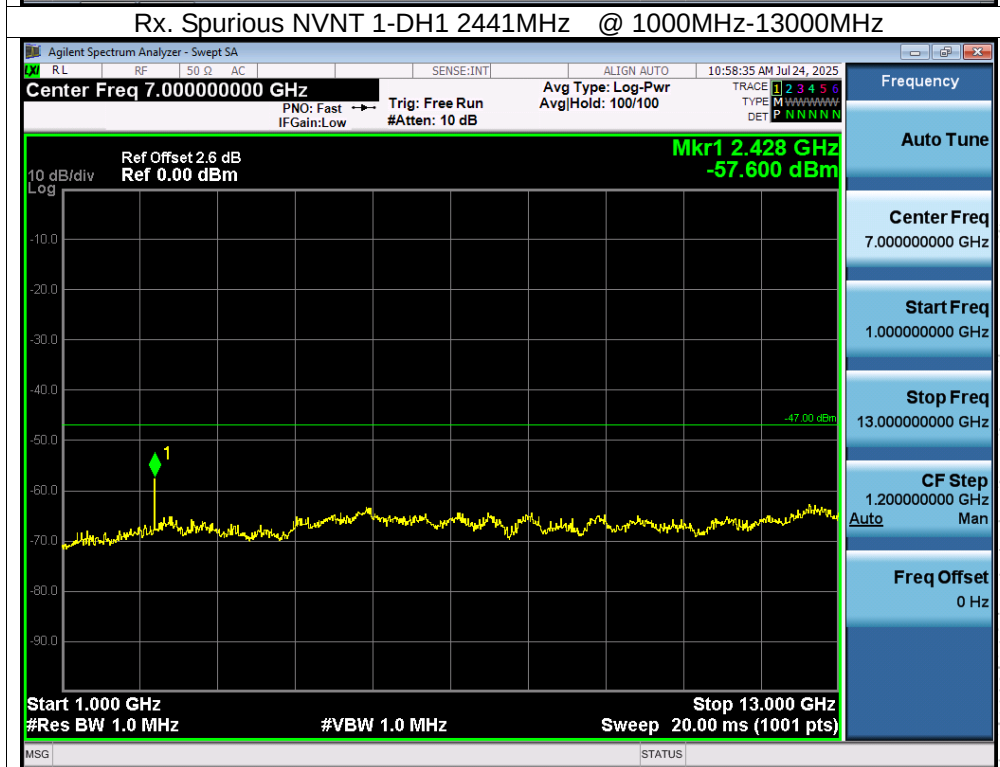

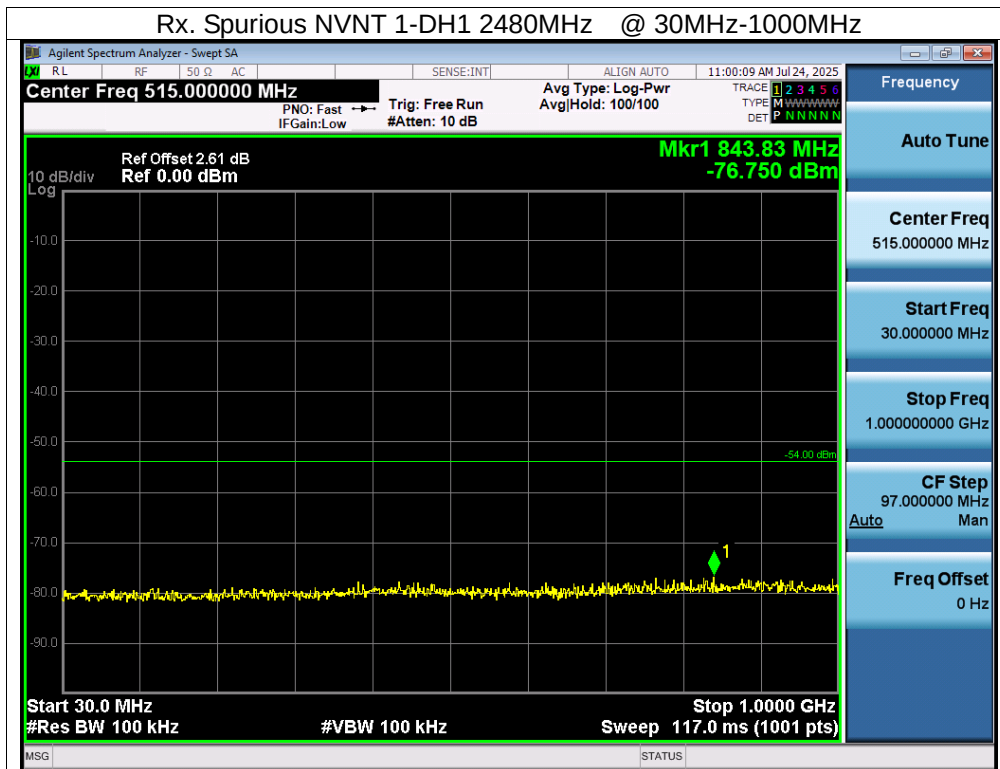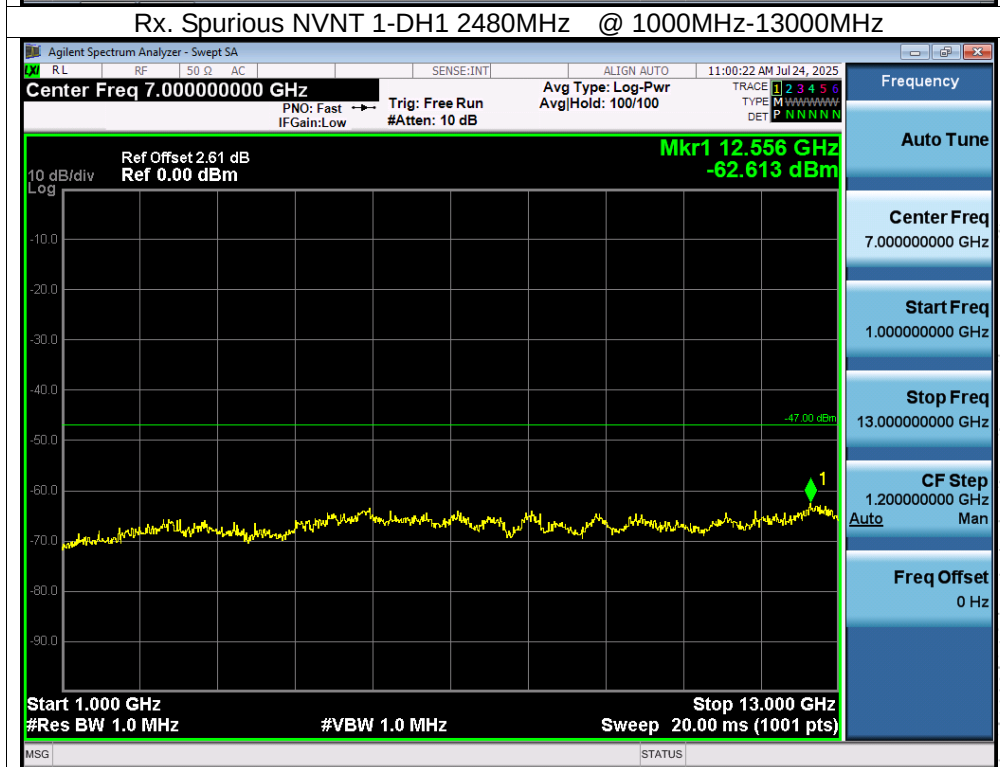

15. EUT Photographs



EUT Photo



Appendix-Photographs Of EUT Constructional Details
(A00106_External & Internal Photos)

16. EUT Test Setup Photographs

Measurement Photos

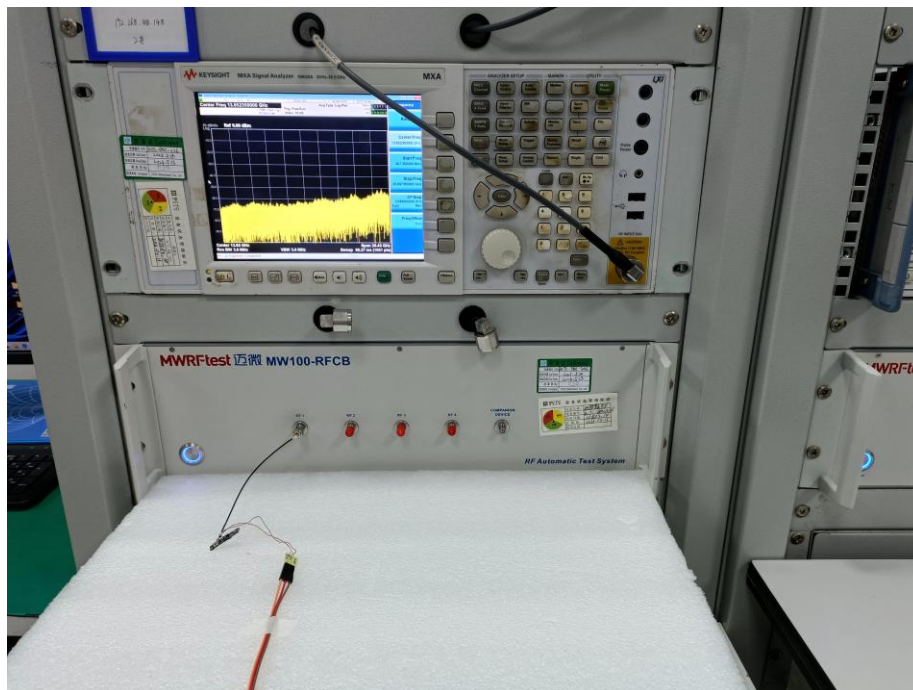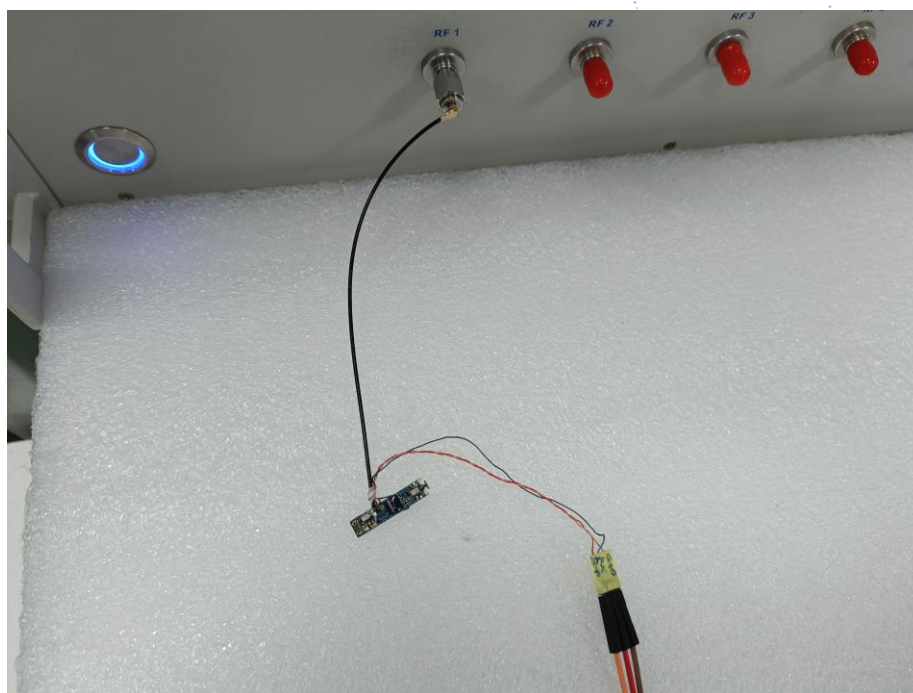

TEST
TC
OVED
t Seal

STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

Consultation E-mail: bctc@bctc-lab.com.cn

Complaint/Advice E-mail: advice@bctc-lab.com.cn

***** END *****

