

Appendix Test Data

Report No.:	1819C60088212502-01	Test Sample No.:	1-2-2
Start Test Date:	2026-7-30	Finish Test Date:	2026-8-20
Test Engineer:	Tracy Liang	Auditor:	Justin Feng
Temperature:	26.1℃	Relative Humidity:	64%
Pressure:	101kPa		

Appendix A: Frequency Error


Test Result

Test Condition	Test Mode	Antenna	Freq.[MHz]	Center Freq [MHz]	Result[ppm]	Limit[ppm]	Verdict
NTNV	CW	Ant1	2402	2401.9975	-1.04080	±50	PASS
NTNV	CW	Ant1	2440	2439.997	-1.22951	±50	PASS
NTNV	CW	Ant1	2480	2479.997	-1.20968	±50	PASS


Note: Result[ppm]= (Center Freq[MHz] -Freq.[MHz])/Freq.[MHz]*1000000



Test Graphs

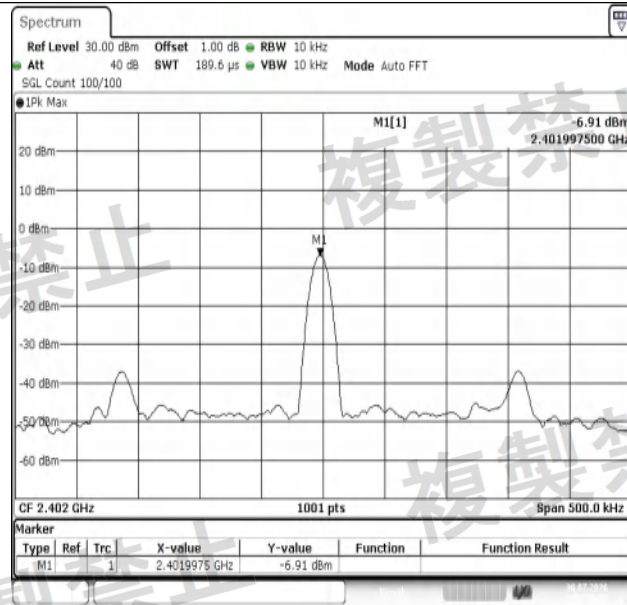


NTNV-CW-Ant1-2402-PASS

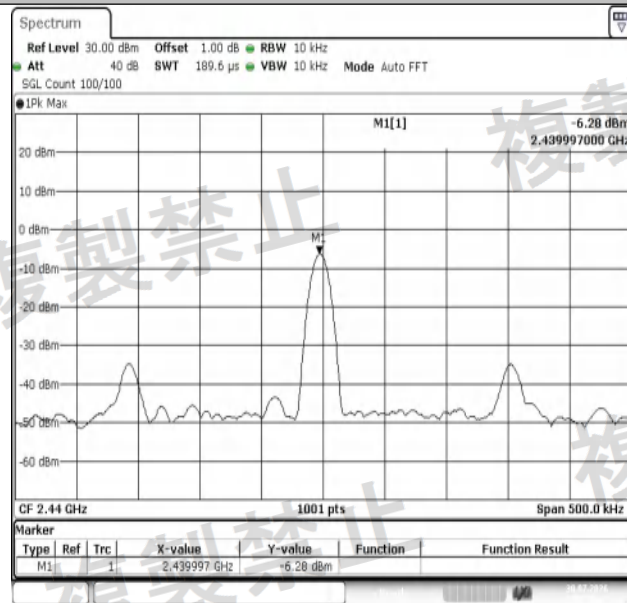

NTNV-CW-Ant1-2440-PASS



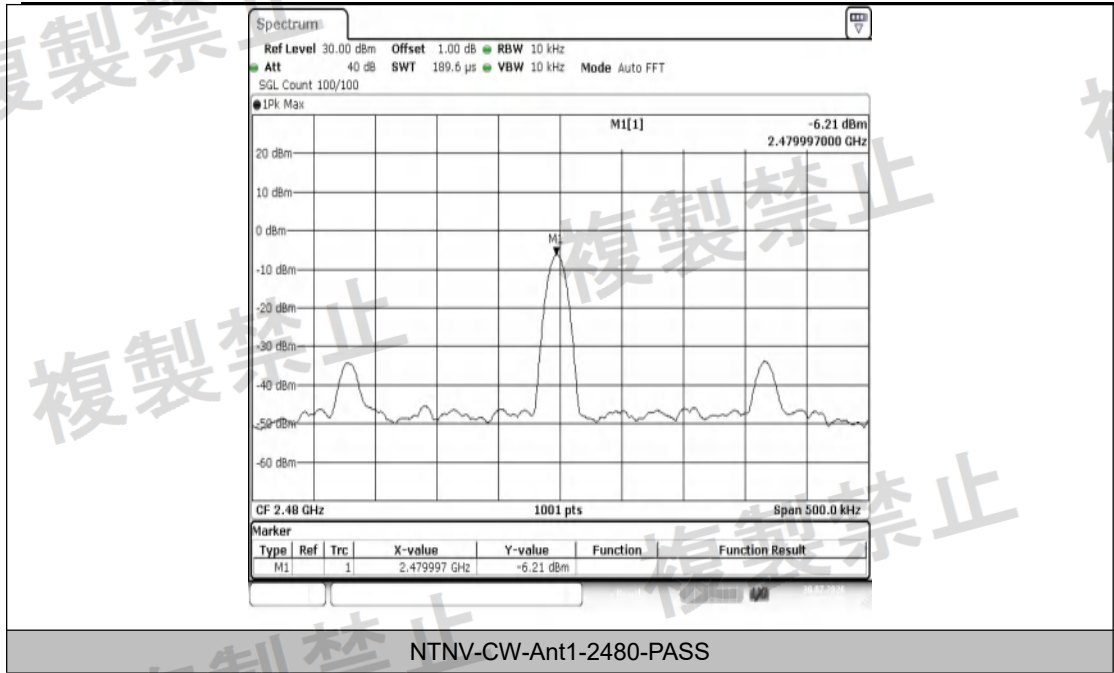

Appendix B: Antenna Power

Test Result-Left

Test Condition	TestMode	Antenna	Freq. [MHz]	Result[dBm]	Result[mW]	Limit [mW]	Verdict
NTNV	BLE_1M	Ant1	2402	9.85	9.6605	≤10	PASS
NTNV	BLE_1M	Ant1	2440	9.84	9.6382	≤10	PASS
NTNV	BLE_1M	Ant1	2480	9.66	9.2469	≤10	PASS
NTNV	BLE_2M	Ant1	2402	9.93	9.8401	≤10	PASS
NTNV	BLE_2M	Ant1	2440	9.88	9.7274	≤10	PASS
NTNV	BLE_2M	Ant1	2480	9.63	9.1833	≤10	PASS

Note: Result(mW)= $10^{(\text{Test Result(dBm)}/10)}$


Test Condition	Test Mode	Antenna	Freq. [MHz]	Power [mW]	Rated Power [mW]	Result [%]	Limit(%)	Verdict
NTNV	BLE_1M	Ant1	2402	9.6605	10	-3.39	+20	PASS
NTNV	BLE_1M	Ant1	2440	9.6382	10	-3.62	+20	PASS
NTNV	BLE_1M	Ant1	2480	9.2469	10	-7.53	+20	PASS
NTNV	BLE_2M	Ant1	2402	9.8401	10	-1.60	+20	PASS
NTNV	BLE_2M	Ant1	2440	9.7274	10	-2.73	+20	PASS
NTNV	BLE_2M	Ant1	2480	9.1833	10	-8.17	+20	PASS

Test Condition	Test Mode	Antenna	Frequency[MHz]	Result[dBm]	Gain[dBi]	EIRP(dBm)	Limit(dBm)	Verdict
NTNV	BLE_1M	Ant1	2402	9.85	-4.20	5.65	≤12.14	PASS
NTNV	BLE_1M	Ant1	2440	9.84	-4.20	5.64	≤12.14	PASS
NTNV	BLE_1M	Ant1	2480	9.66	-4.20	5.46	≤12.14	PASS
NTNV	BLE_2M	Ant1	2402	9.93	-4.20	5.73	≤12.14	PASS
NTNV	BLE_2M	Ant1	2440	9.88	-4.20	5.68	≤12.14	PASS
NTNV	BLE_2M	Ant1	2480	9.63	-4.20	5.43	≤12.14	PASS


Note:EIRP[dBm]=Result[dBm]+Gain(dBi)



Test Graphs-Left

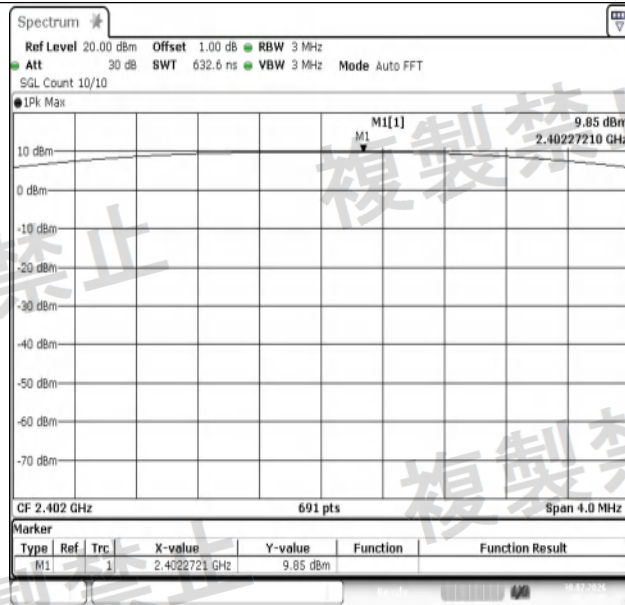


NTNV-BLE_1M-Ant1-2402-PASS

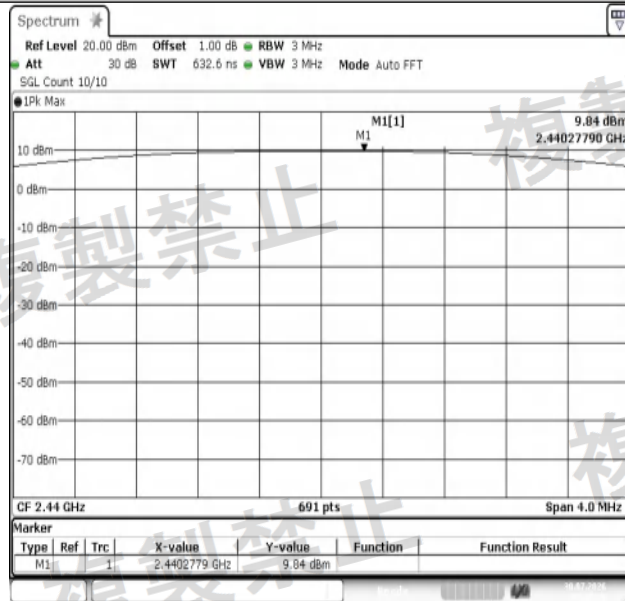


NTNV-BLE_1M-Ant1-2440-PASS



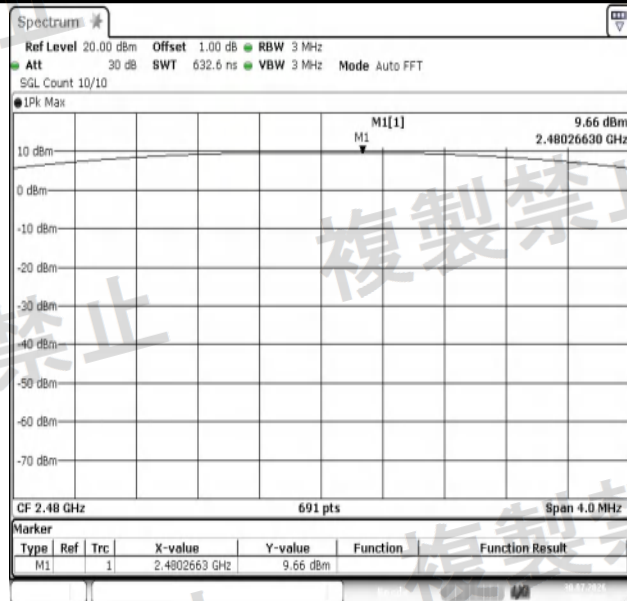


NTNV-BLE_1M-Ant1-2480-PASS

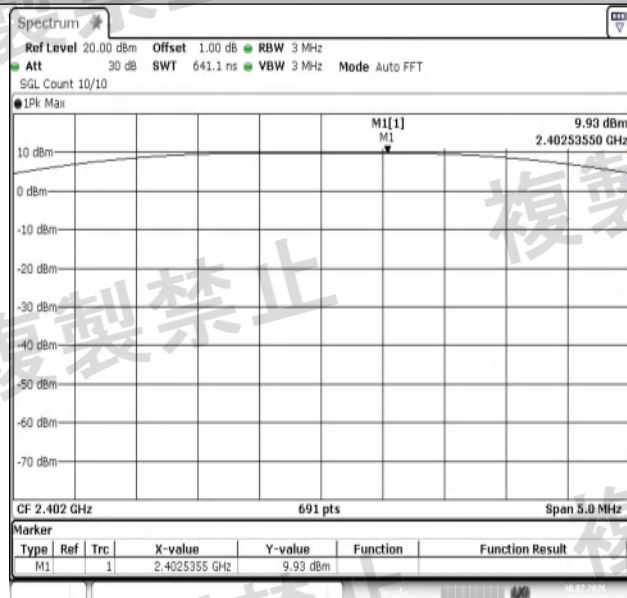

NTNV-BLE_2M-Ant1-2402-PASS



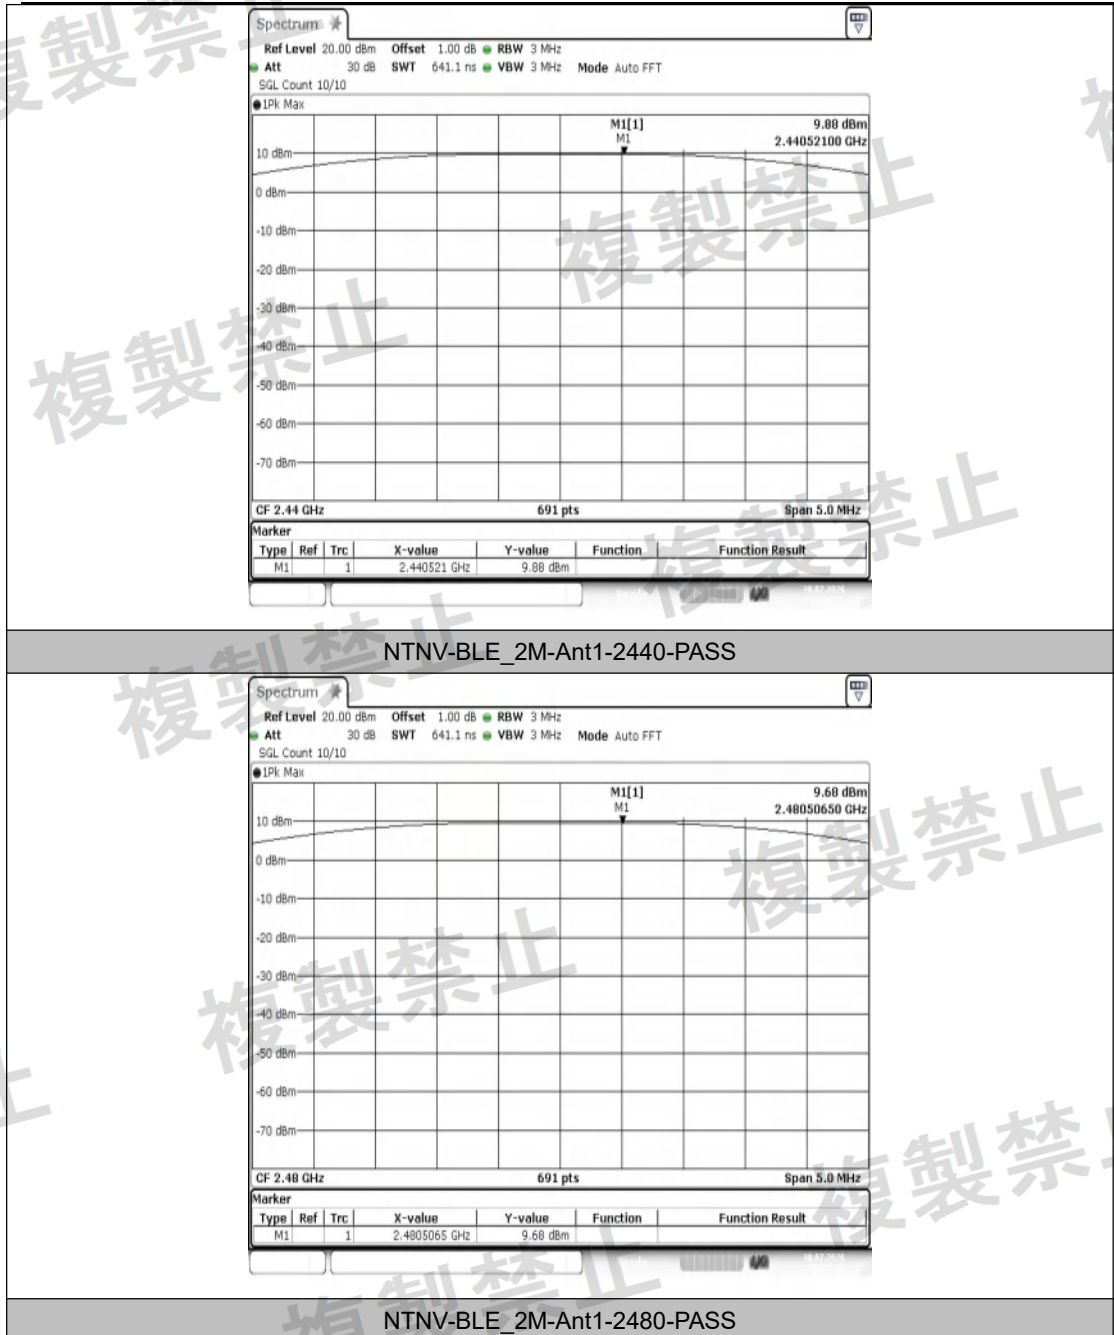

Test Result-Right

Test Condition	TestMode	Antenna	Freq. [MHz]	Result[dBm]	Result[mW]	Limit [mW]	Verdict
NTNV	BLE_1M	Ant1	2402	9.32	8.5506	≤10	PASS
NTNV	BLE_1M	Ant1	2440	9.30	8.5113	≤10	PASS
NTNV	BLE_1M	Ant1	2480	9.03	7.9983	≤10	PASS
NTNV	BLE_2M	Ant1	2402	9.33	8.5703	≤10	PASS
NTNV	BLE_2M	Ant1	2440	9.31	8.5310	≤10	PASS
NTNV	BLE_2M	Ant1	2480	9.05	8.0352	≤10	PASS

Note: Result(mW)= $10^{(\text{Test Result(dBm)}/10)}$


Test Condition	Test Mode	Antenna	Freq. [MHz]	Power [mW]	Rated Power [mW]	Result [%]	Limit(%)	Verdict
NTNV	BLE_1M	Ant1	2402	8.5506	9	-4.99	+20	PASS
NTNV	BLE_1M	Ant1	2440	8.5113	9	-5.43	+20	PASS
NTNV	BLE_1M	Ant1	2480	7.9983	9	-11.13	+20	PASS
NTNV	BLE_2M	Ant1	2402	8.5703	9	-4.77	+20	PASS
NTNV	BLE_2M	Ant1	2440	8.531	9	-5.21	+20	PASS
NTNV	BLE_2M	Ant1	2480	8.0352	9	-10.72	+20	PASS

Test Condition	Test Mode	Antenna	Frequency[MHz]	Result[dBm]	Gain[dBi]	EIRP(dBm)	Limit(dBm)	Verdict
NTNV	BLE_1M	Ant1	2402	9.32	-4.50	4.82	≤12.14	PASS
NTNV	BLE_1M	Ant1	2440	9.30	-4.50	4.80	≤12.14	PASS
NTNV	BLE_1M	Ant1	2480	9.03	-4.50	4.53	≤12.14	PASS
NTNV	BLE_2M	Ant1	2402	9.33	-4.50	4.83	≤12.14	PASS
NTNV	BLE_2M	Ant1	2440	9.31	-4.50	4.81	≤12.14	PASS
NTNV	BLE_2M	Ant1	2480	9.05	-4.50	4.55	≤12.14	PASS


Note: EIRP[dBm]=Result[dBm]+Gain(dBi)



Test Graphs-Right

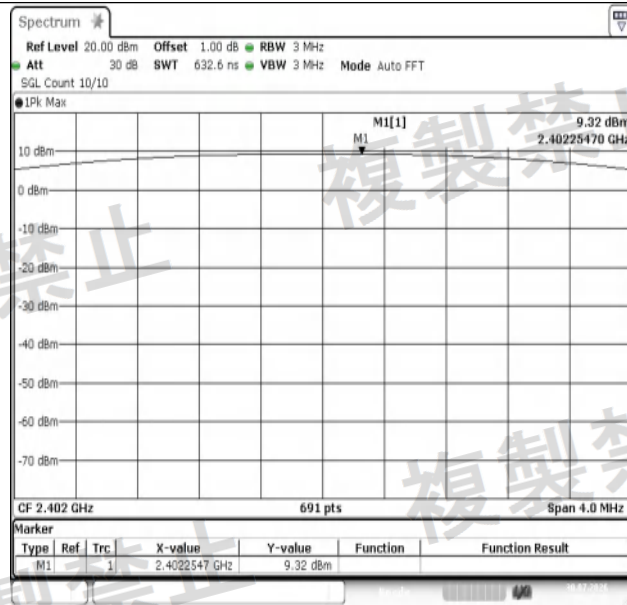


NTNV-BLE_1M-Ant1-2402-PASS

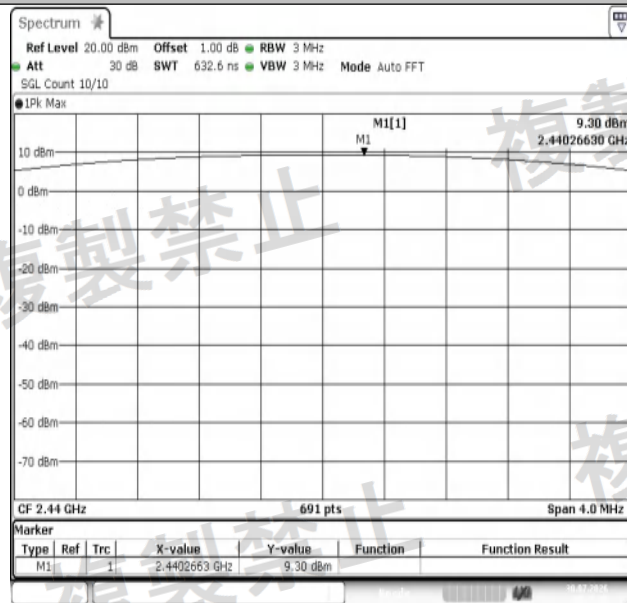


NTNV-BLE_1M-Ant1-2440-PASS



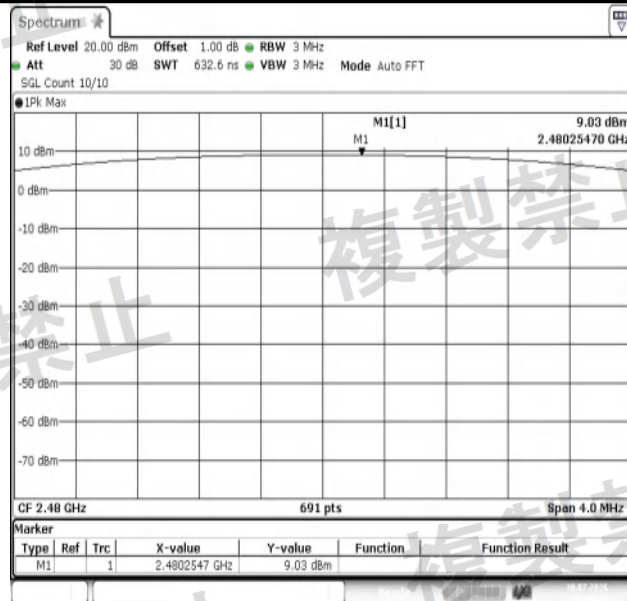


NTNV-BLE_1M-Ant1-2480-PASS

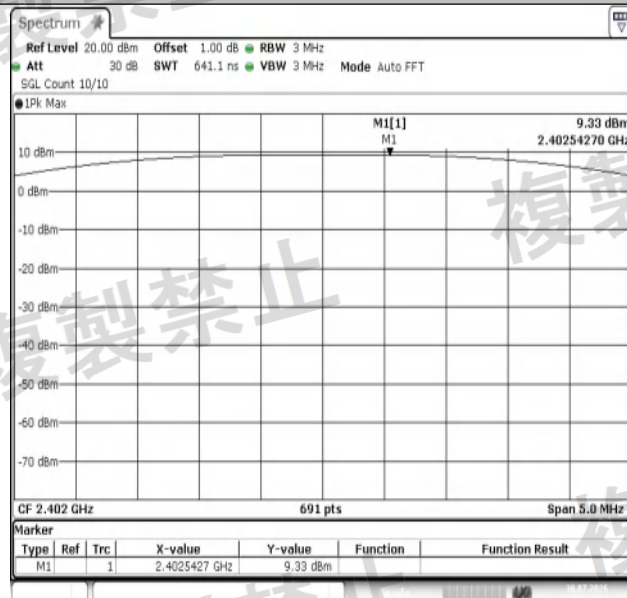


NTNV-BLE_2M-Ant1-2402-PASS



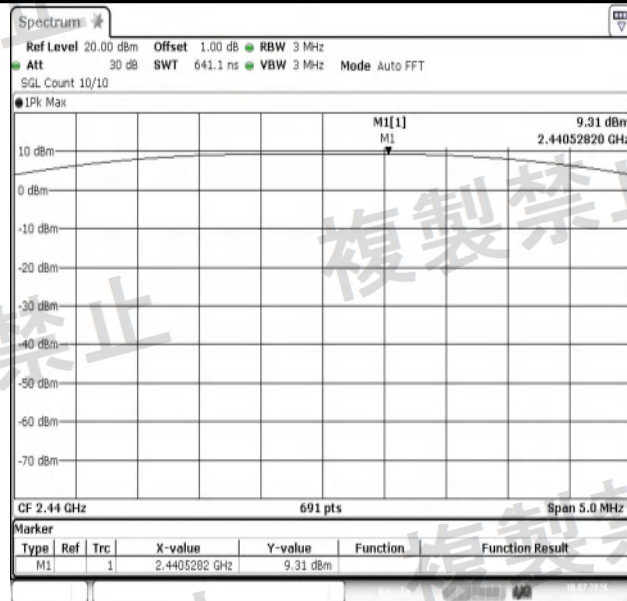

NTNV-BLE_2M-Ant1-2440-PASS

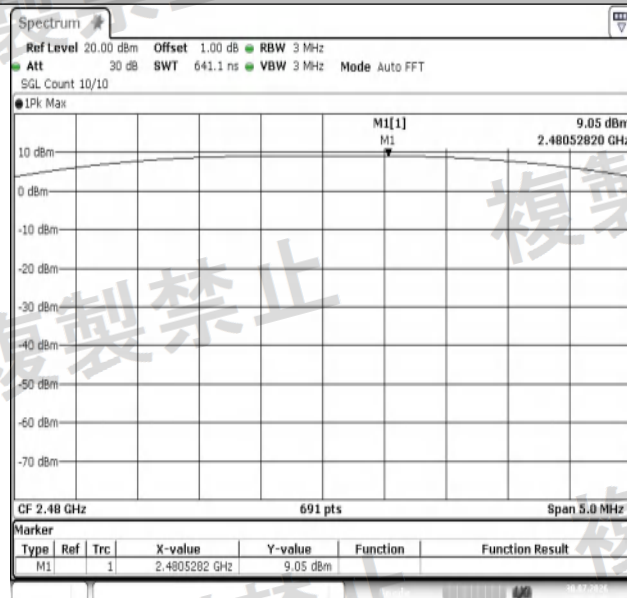

NTNV-BLE_2M-Ant1-2480-PASS




Appendix C: Occupied Bandwidth

Test Result


Test Condition	TestMode	Antenna	Freq.[MHz]	Result[MHz]	Limit [MHz]	Verdict
NTNV	BLE_1M	Ant1	2402	1.271	≤26	PASS
NTNV	BLE_1M	Ant1	2440	1.267	≤26	PASS
NTNV	BLE_1M	Ant1	2480	1.263	≤26	PASS
NTNV	BLE_2M	Ant1	2402	2.182	≤26	PASS
NTNV	BLE_2M	Ant1	2440	2.190	≤26	PASS
NTNV	BLE_2M	Ant1	2480	2.198	≤26	PASS



Test Graphs

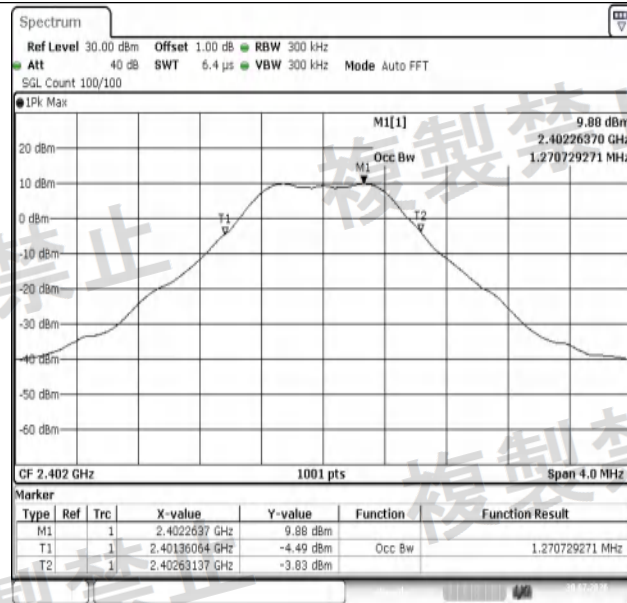


NTNV-BLE_1M-Ant1-2402-PASS

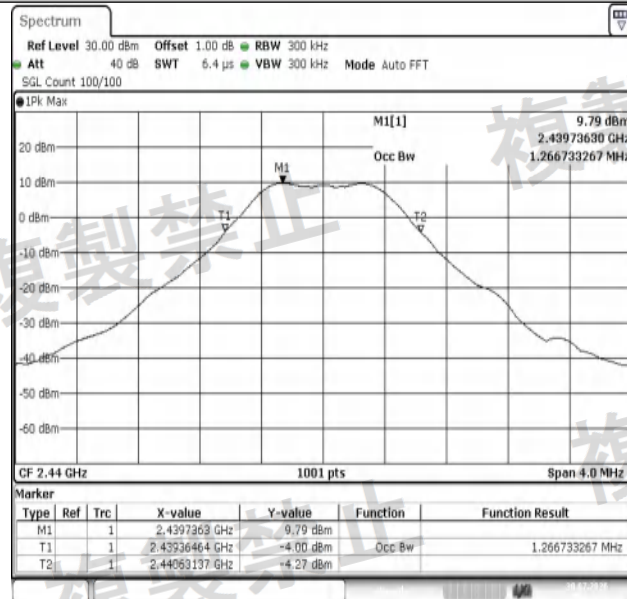


NTNV-BLE_1M-Ant1-2440-PASS



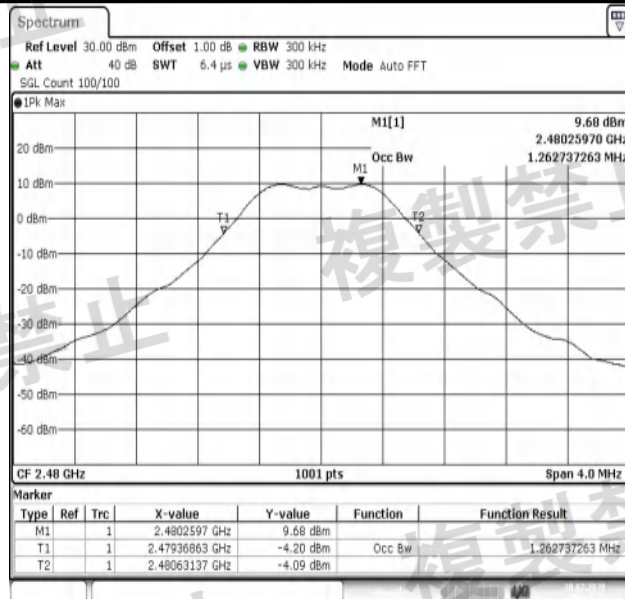


NTNV-BLE_1M-Ant1-2480-PASS

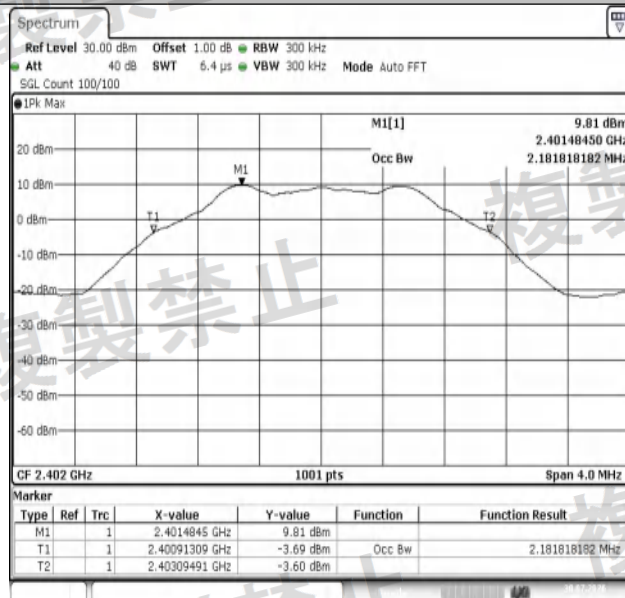


NTNV-BLE_2M-Ant1-2402-PASS



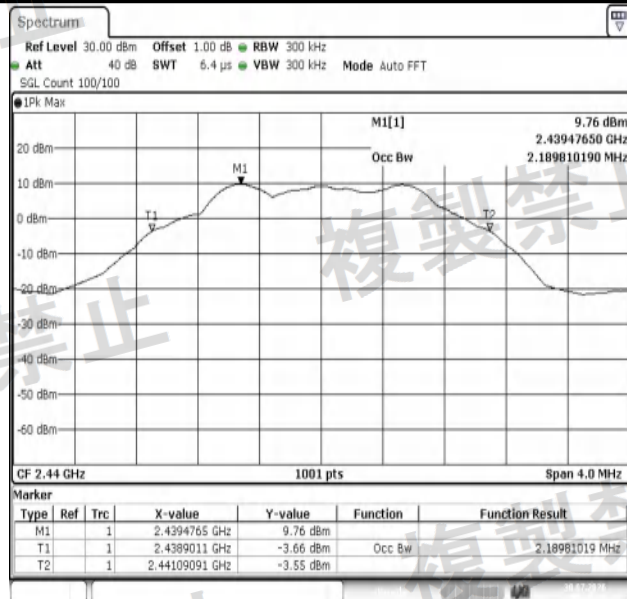

NTNV-BLE_2M-Ant1-2440-PASS

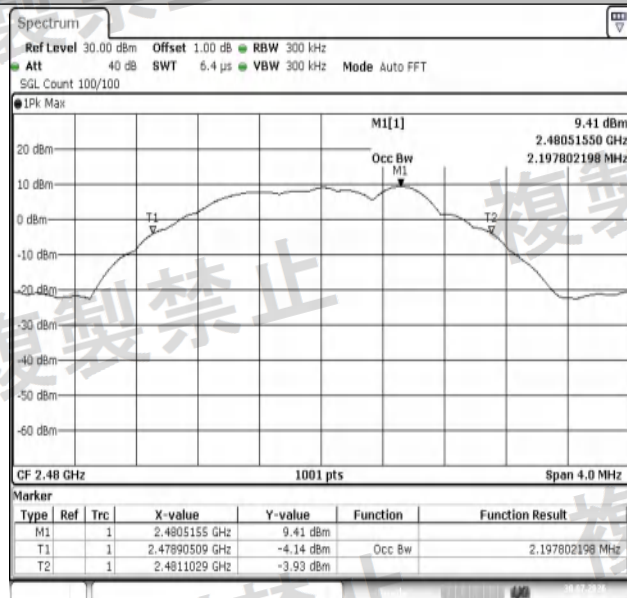

NTNV-BLE_2M-Ant1-2480-PASS




Appendix D: Spurious Emission of TX

Test Result-Left


Test Condition	Test Mode	Antenna	Freq. [MHz]	Freq.Range [MHz]	Freq. [MHz]	Result [dBm/MHz]	Limit [dBm/MHz]	Result [μ W/MHz]	Limit [μ W/MHz]	Verdict
NTNV	BLE_1M	Ant1	2402	30~1000	939.62	-49.86	≤ -26	0.01033	≤ 2.5	PASS
NTNV	BLE_1M	Ant1	2402	1000~2387	2377.29	-48.39	≤ -26	0.01449	≤ 2.5	PASS
NTNV	BLE_1M	Ant1	2402	2387~2400	2399.99	-21.84	≤ -16	6.54636	≤ 25	PASS
NTNV	BLE_1M	Ant1	2402	2483.5~2496.5	2492.91	-38.16	≤ -16	0.15276	≤ 25	PASS
NTNV	BLE_1M	Ant1	2402	2496.5~13000	9606.84	-43.44	≤ -26	0.04529	≤ 2.5	PASS
NTNV	BLE_1M	Ant1	2440	30~1000	806.97	-50.11	≤ -26	0.00975	≤ 2.5	PASS
NTNV	BLE_1M	Ant1	2440	1000~2387	2057.24	-49.00	≤ -26	0.01259	≤ 2.5	PASS
NTNV	BLE_1M	Ant1	2440	2387~2400	2394.96	-38.23	≤ -16	0.15031	≤ 25	PASS
NTNV	BLE_1M	Ant1	2440	2483.5~2496.5	2486.05	-38.26	≤ -16	0.14928	≤ 25	PASS
NTNV	BLE_1M	Ant1	2440	2496.5~13000	9761.25	-43.19	≤ -26	0.04797	≤ 2.5	PASS
NTNV	BLE_1M	Ant1	2480	30~1000	967.51	-50.10	≤ -26	0.00977	≤ 2.5	PASS
NTNV	BLE_1M	Ant1	2480	1000~2387	1240.30	-46.26	≤ -26	0.02366	≤ 2.5	PASS
NTNV	BLE_1M	Ant1	2480	2387~2400	2398.96	-38.57	≤ -16	0.13900	≤ 25	PASS
NTNV	BLE_1M	Ant1	2480	2483.5~2496.5	2483.50	-31.93	≤ -16	0.64121	≤ 25	PASS
NTNV	BLE_1M	Ant1	2480	2496.5~13000	9920.90	-42.32	≤ -26	0.05861	≤ 2.5	PASS
NTNV	BLE_2M	Ant1	2402	30~1000	630.43	-50.01	≤ -26	0.00998	≤ 2.5	PASS
NTNV	BLE_2M	Ant1	2402	1000~2387	1998.99	-49.17	≤ -26	0.01211	≤ 2.5	PASS
NTNV	BLE_2M	Ant1	2402	2387~2400	2399.99	-27.42	≤ -16	1.81134	≤ 25	PASS
NTNV	BLE_2M	Ant1	2402	2483.5~2496.5	2494.24	-37.89	≤ -16	0.16255	≤ 25	PASS
NTNV	BLE_2M	Ant1	2402	2496.5~13000	6183.75	-44.57	≤ -26	0.03491	≤ 2.5	PASS
NTNV	BLE_2M	Ant1	2440	30~1000	935.50	-49.85	≤ -26	0.01035	≤ 2.5	PASS
NTNV	BLE_2M	Ant1	2440	1000~2387	2336.37	-48.07	≤ -26	0.01560	≤ 2.5	PASS
NTNV	BLE_2M	Ant1	2440	2387~2400	2399.75	-38.14	≤ -16	0.15346	≤ 25	PASS
NTNV	BLE_2M	Ant1	2440	2483.5~2496.5	2488.54	-38.10	≤ -16	0.15488	≤ 25	PASS
NTNV	BLE_2M	Ant1	2440	2496.5~13000	9762.30	-43.23	≤ -26	0.04753	≤ 2.5	PASS
NTNV	BLE_2M	Ant1	2480	30~1000	700.76	-49.99	≤ -26	0.01002	≤ 2.5	PASS
NTNV	BLE_2M	Ant1	2480	1000~2387	1239.60	-47.01	≤ -26	0.01991	≤ 2.5	PASS
NTNV	BLE_2M	Ant1	2480	2387~2400	2397.60	-39.00	≤ -16	0.12589	≤ 25	PASS
NTNV	BLE_2M	Ant1	2480	2483.5~2496.5	2483.59	-31.35	≤ -16	0.73282	≤ 25	PASS
NTNV	BLE_2M	Ant1	2480	2496.5~13000	9918.27	-43.38	≤ -26	0.04592	≤ 2.5	PASS



Test Graphs-Left

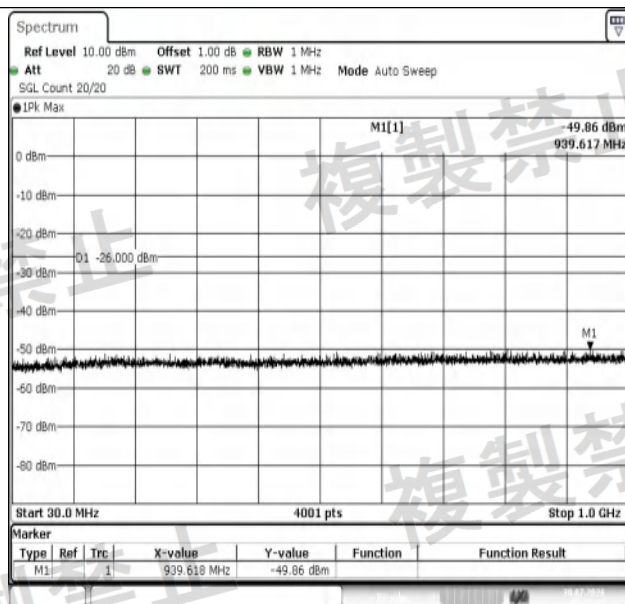


NTNV-BLE_1M-Ant1-2402-30~1000-PASS

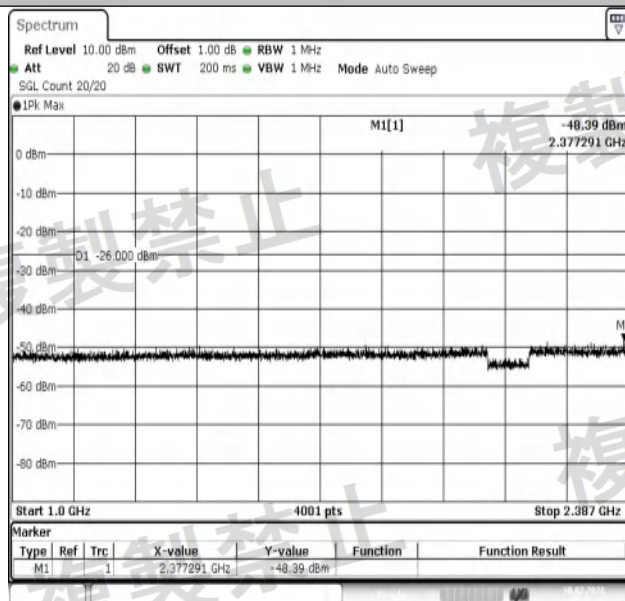


NTNV-BLE_1M-Ant1-2402-1000~2387-PASS



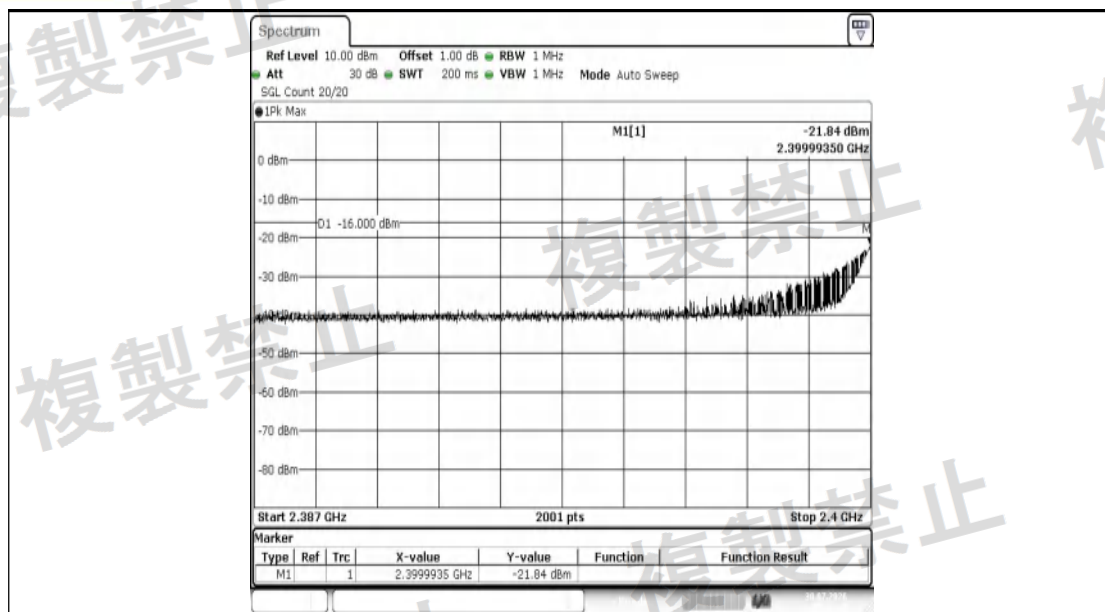



NTNV-BLE_1M-Ant1-2402-2387~2400-PASS

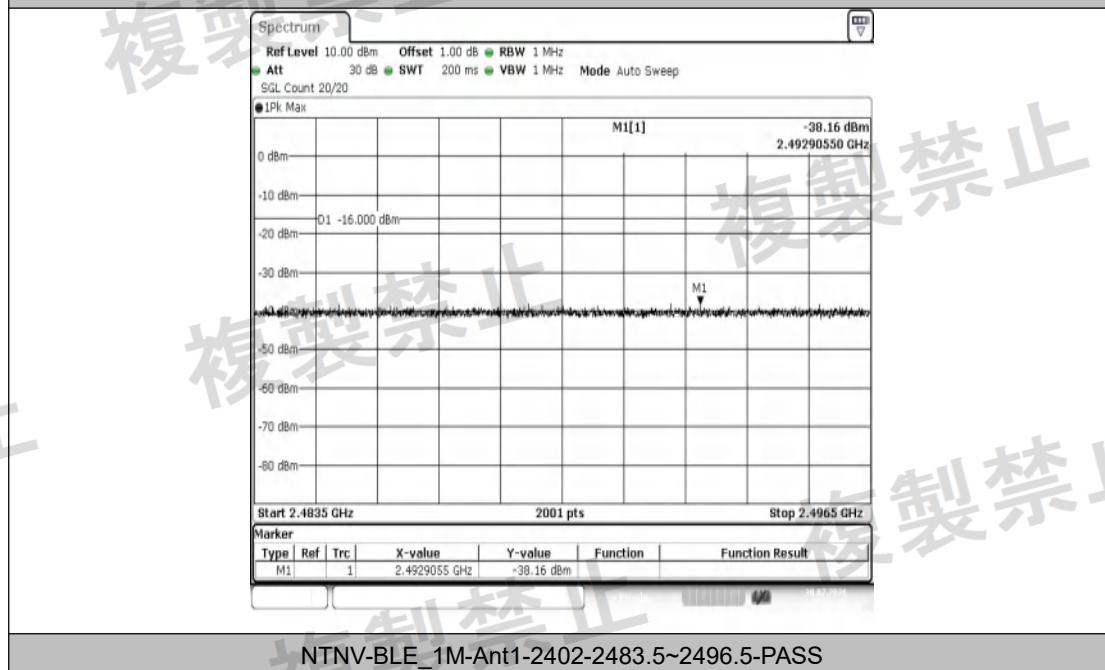


NTNV-BLE_1M-Ant1-2402-2483.5~2496.5-PASS



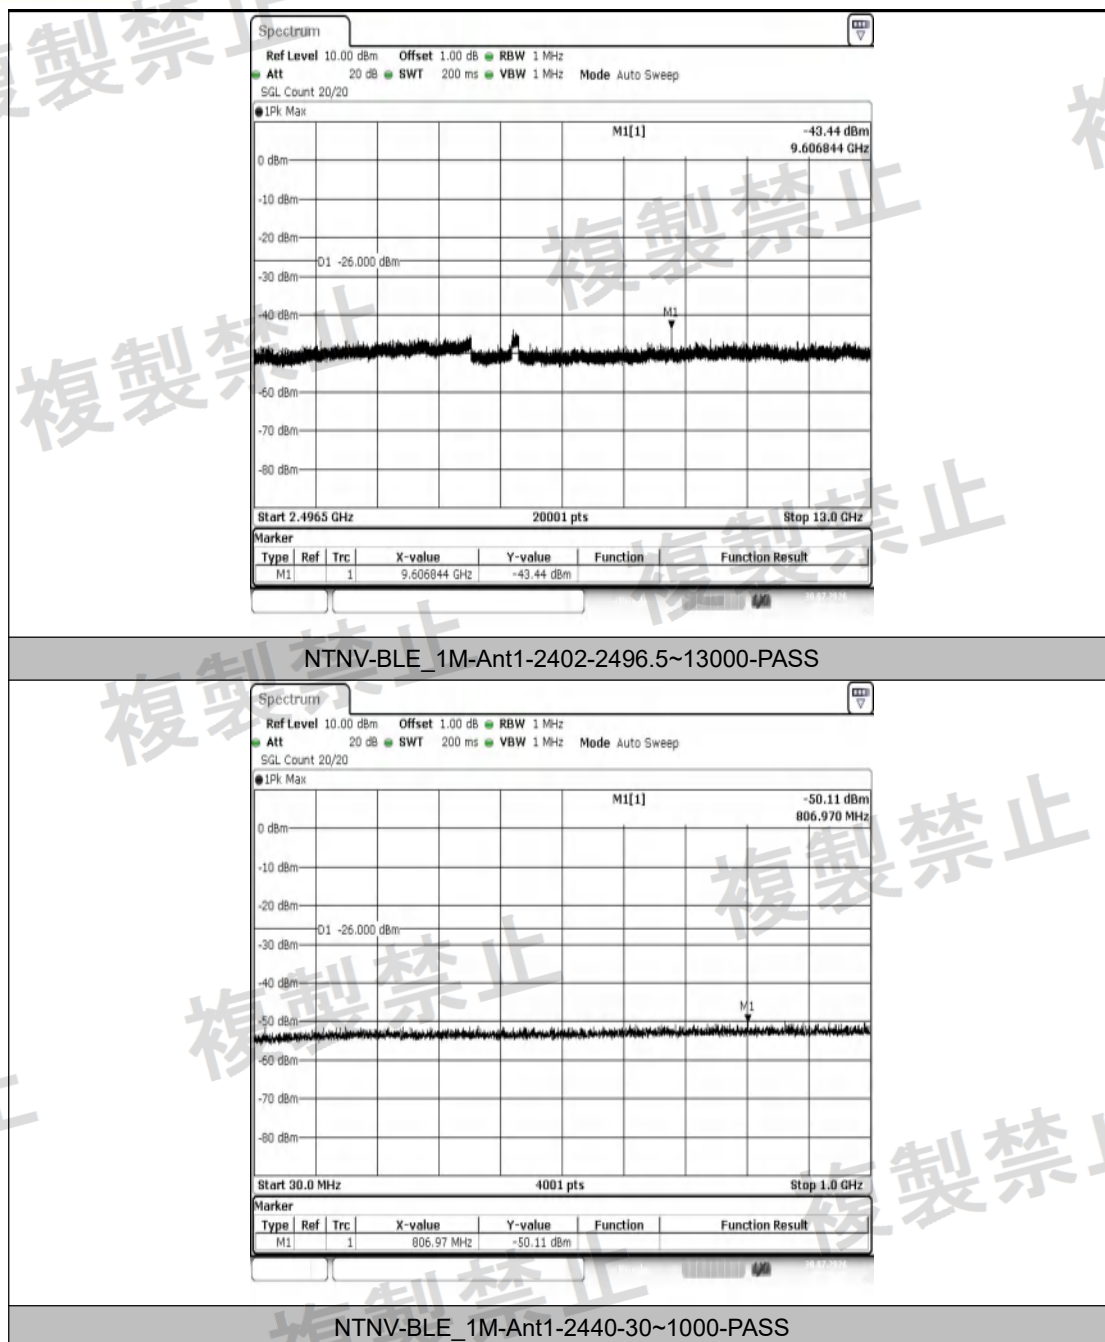

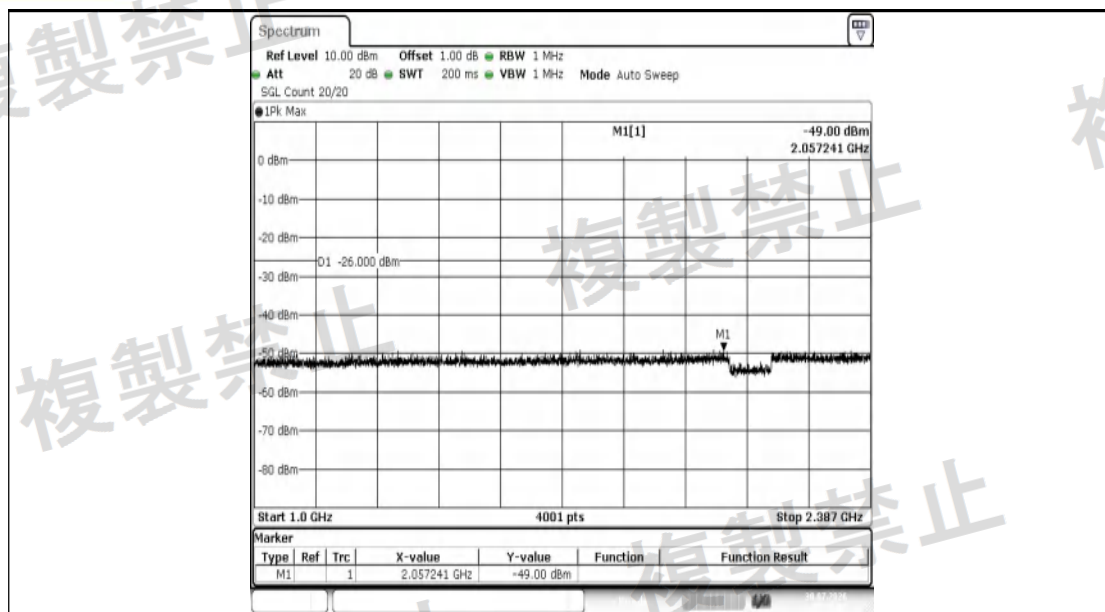



NTNV-BLE_1M-Ant1-2440-1000~2387-PASS

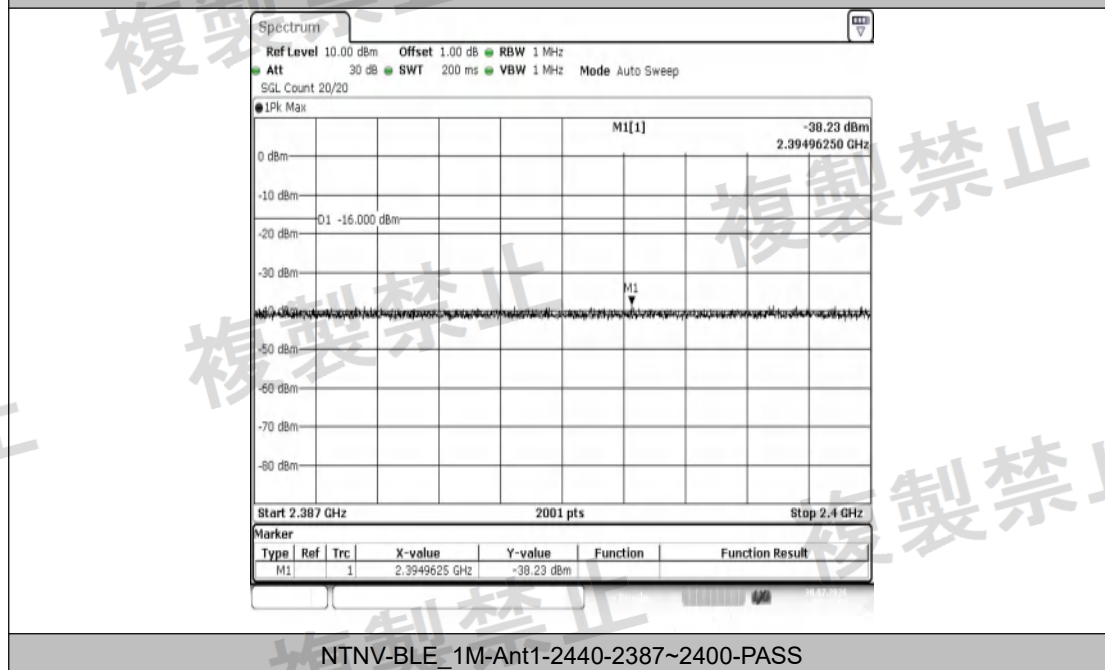



NTNV-BLE_1M-Ant1-2440-2387~2400-PASS




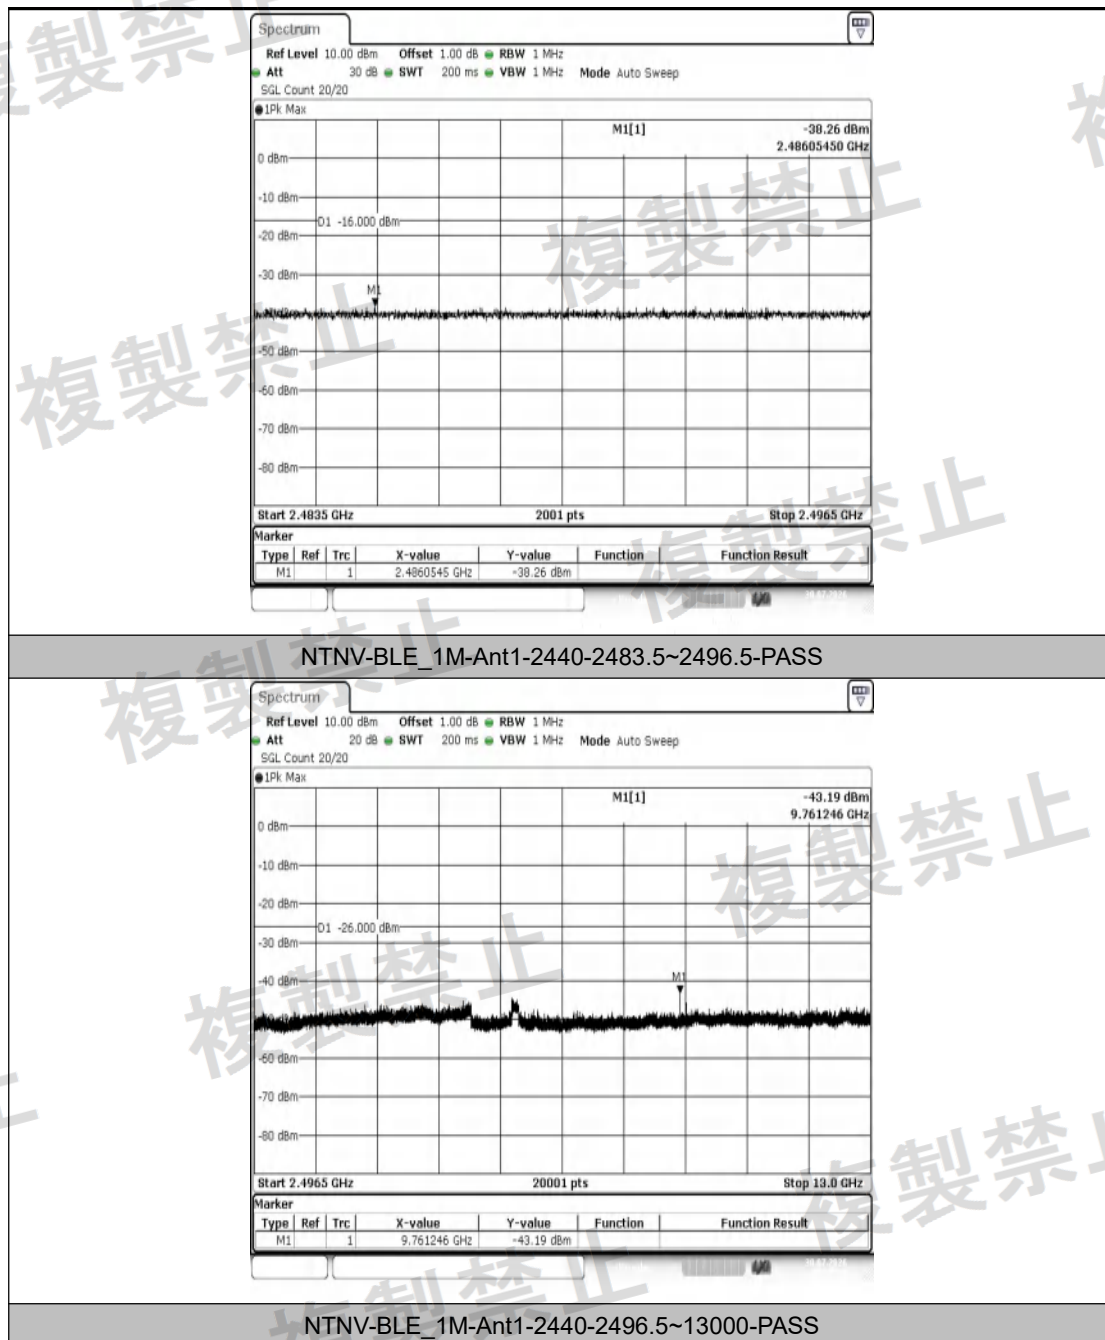


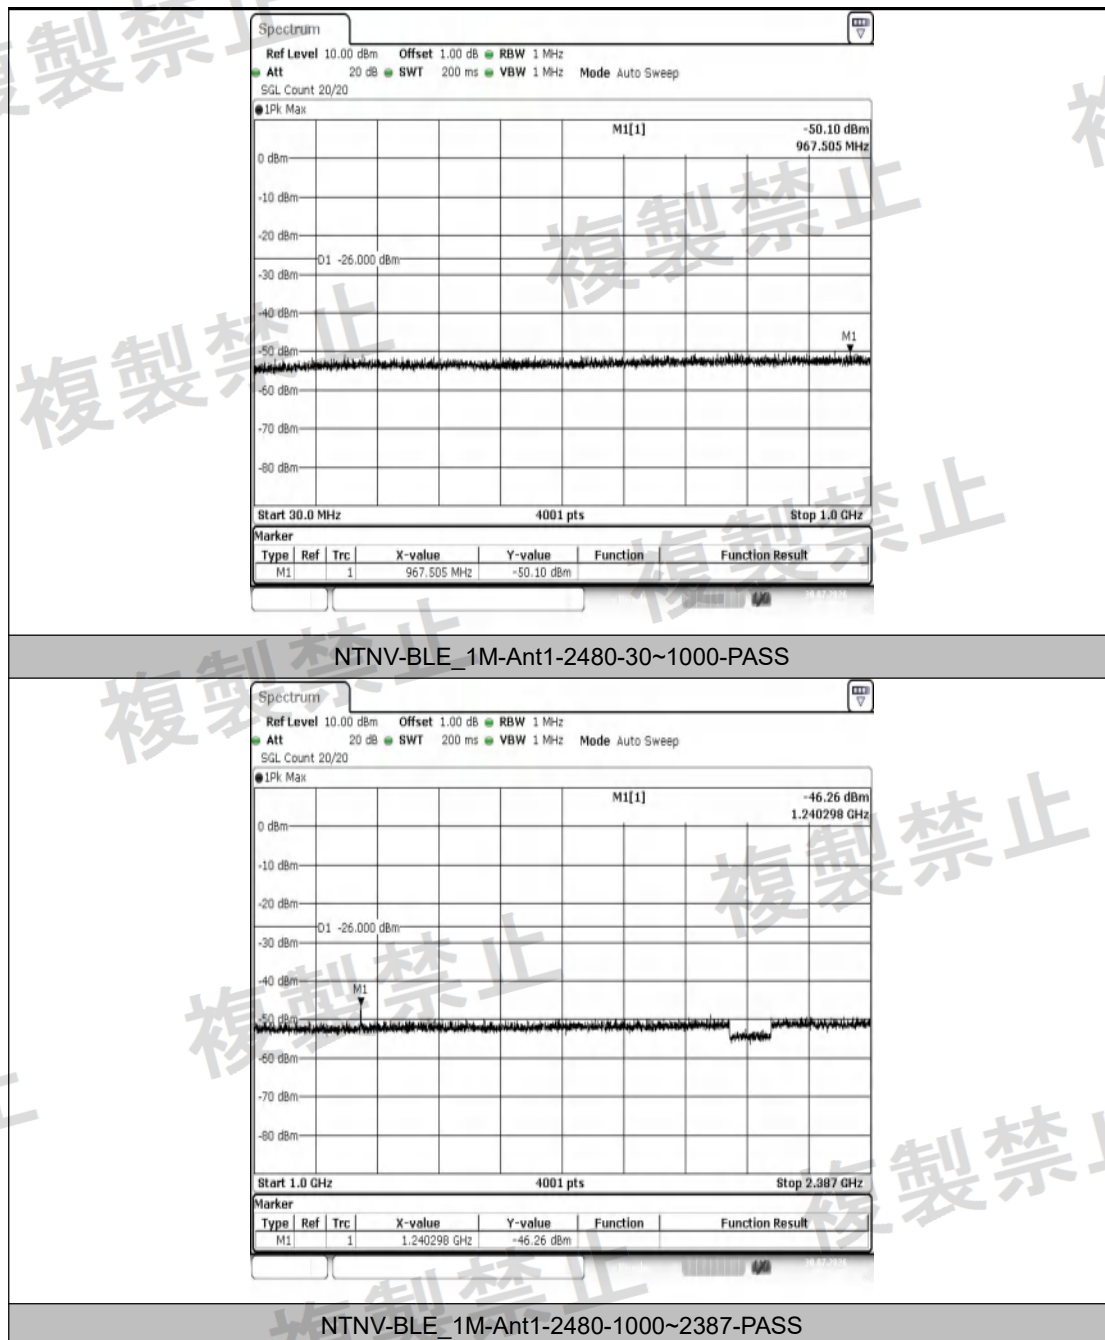


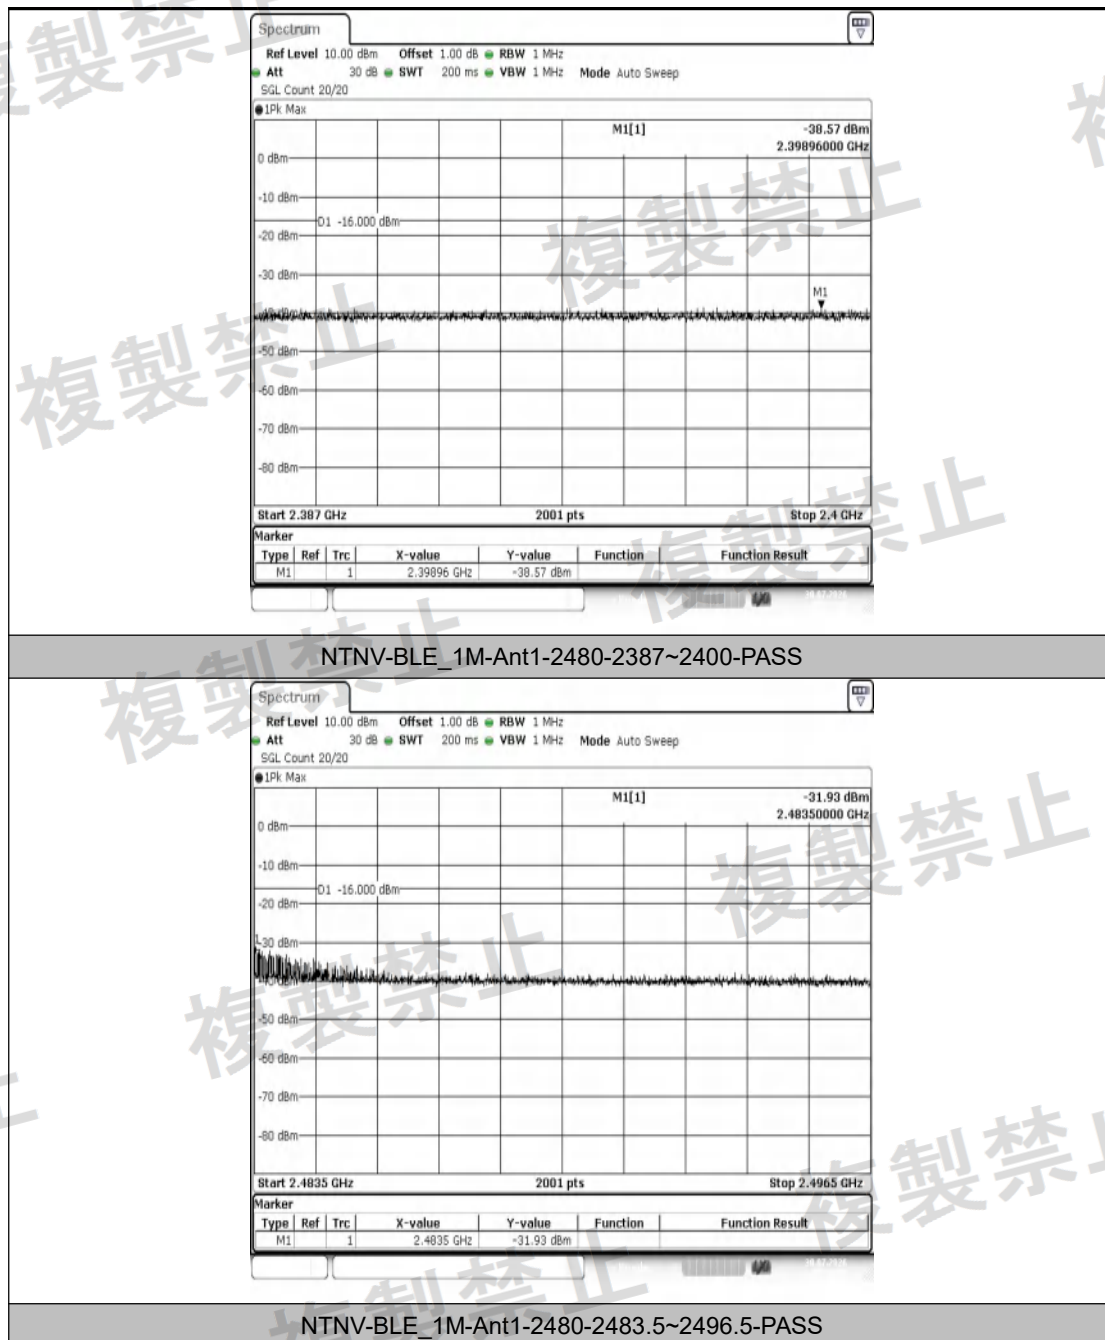


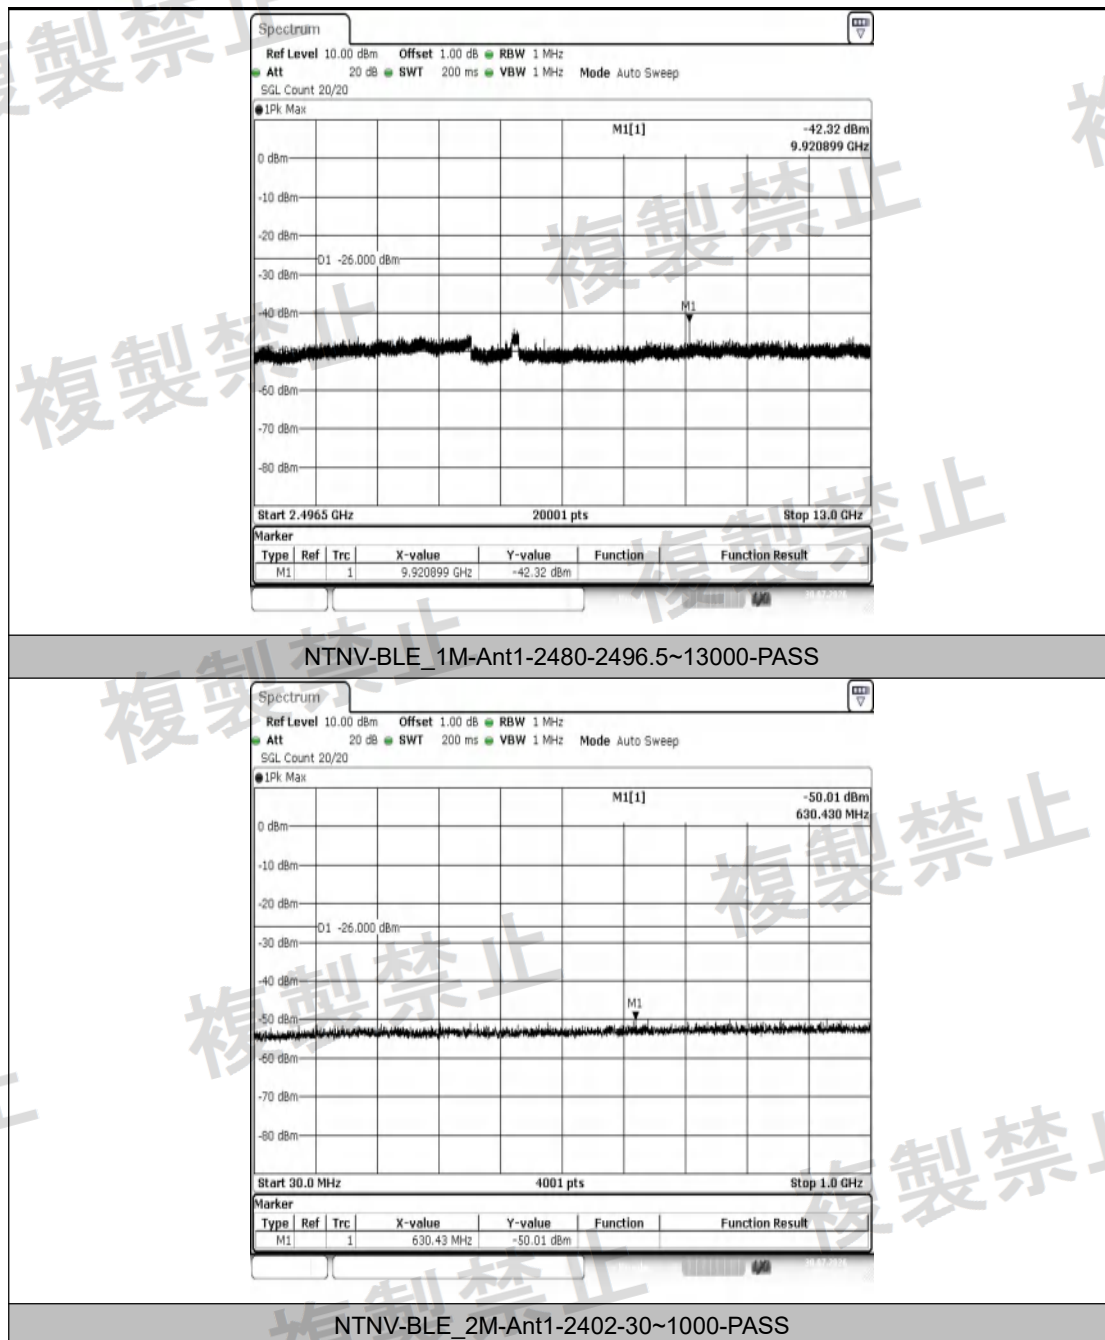


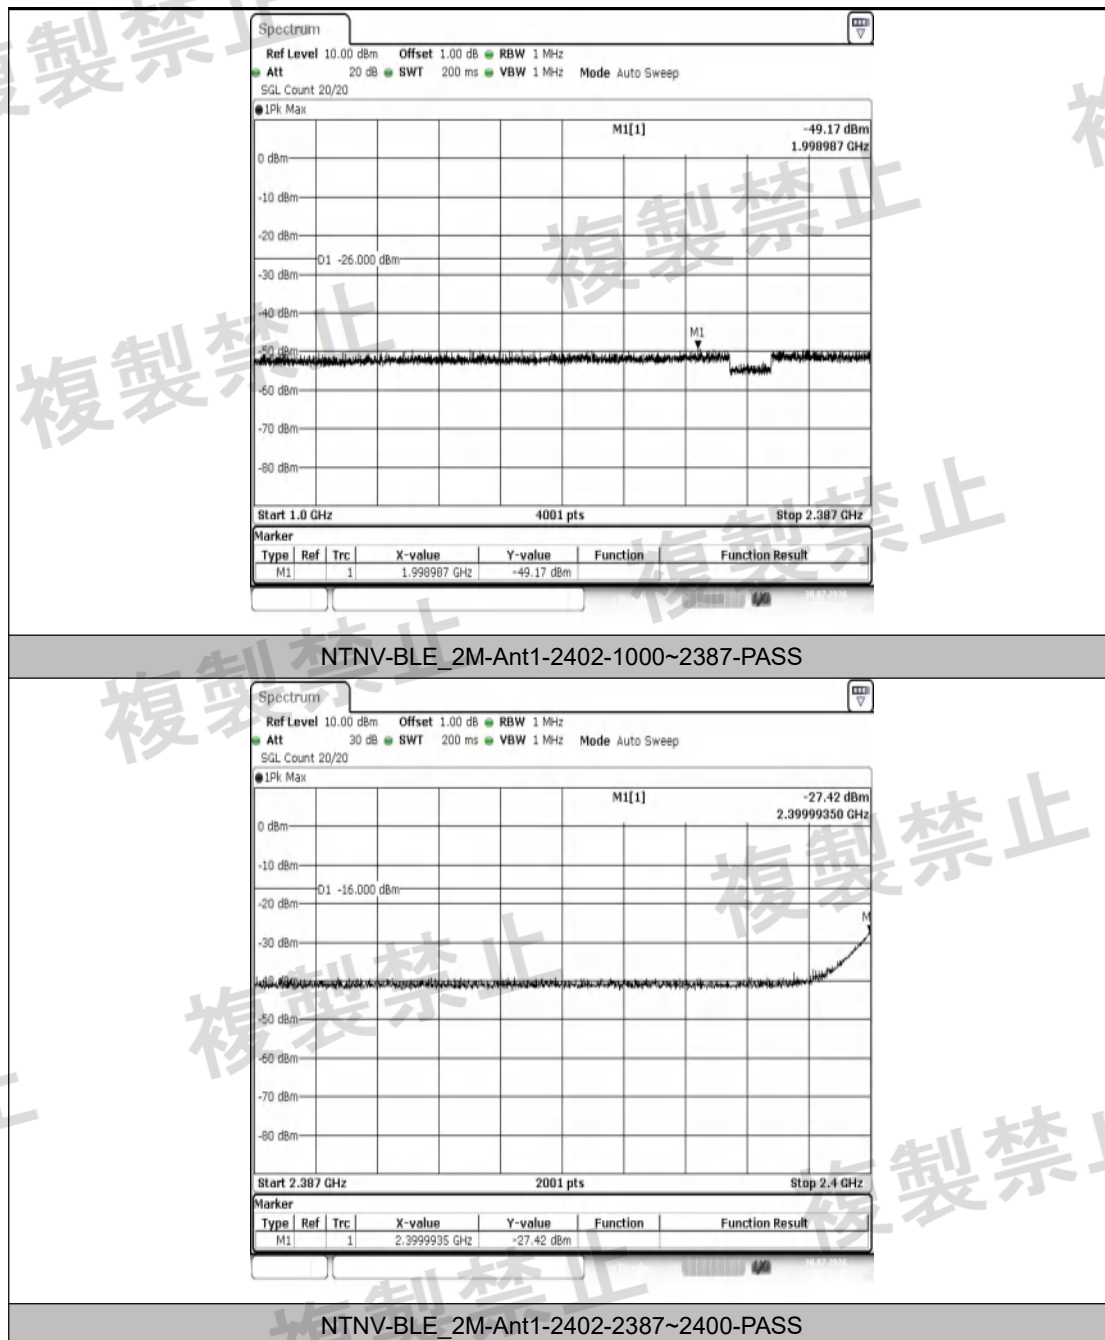


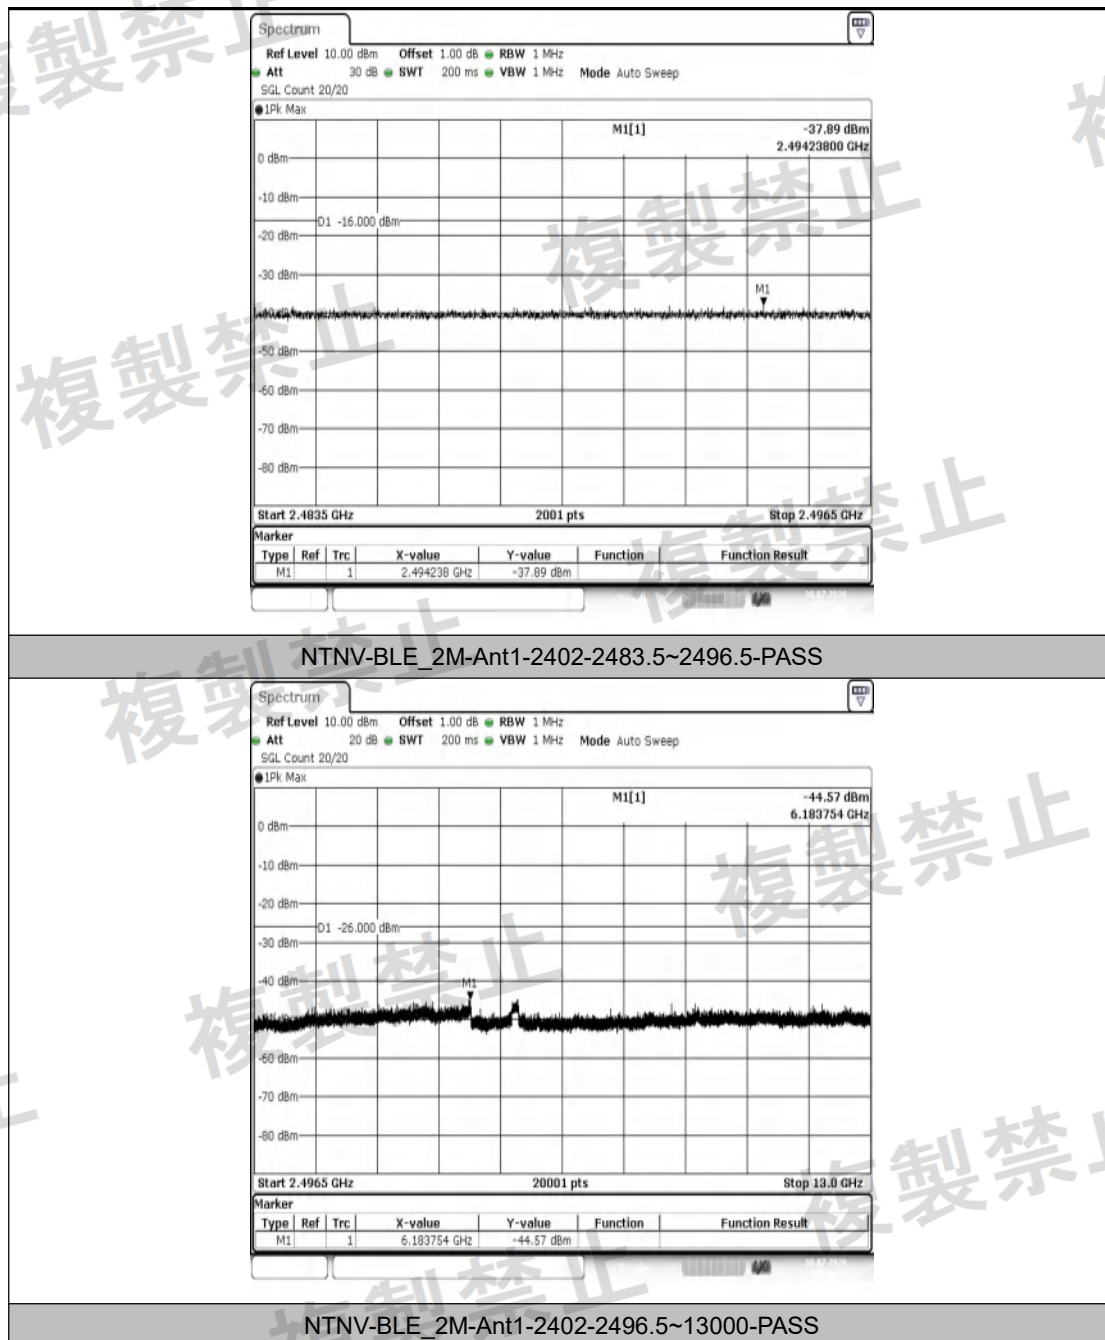


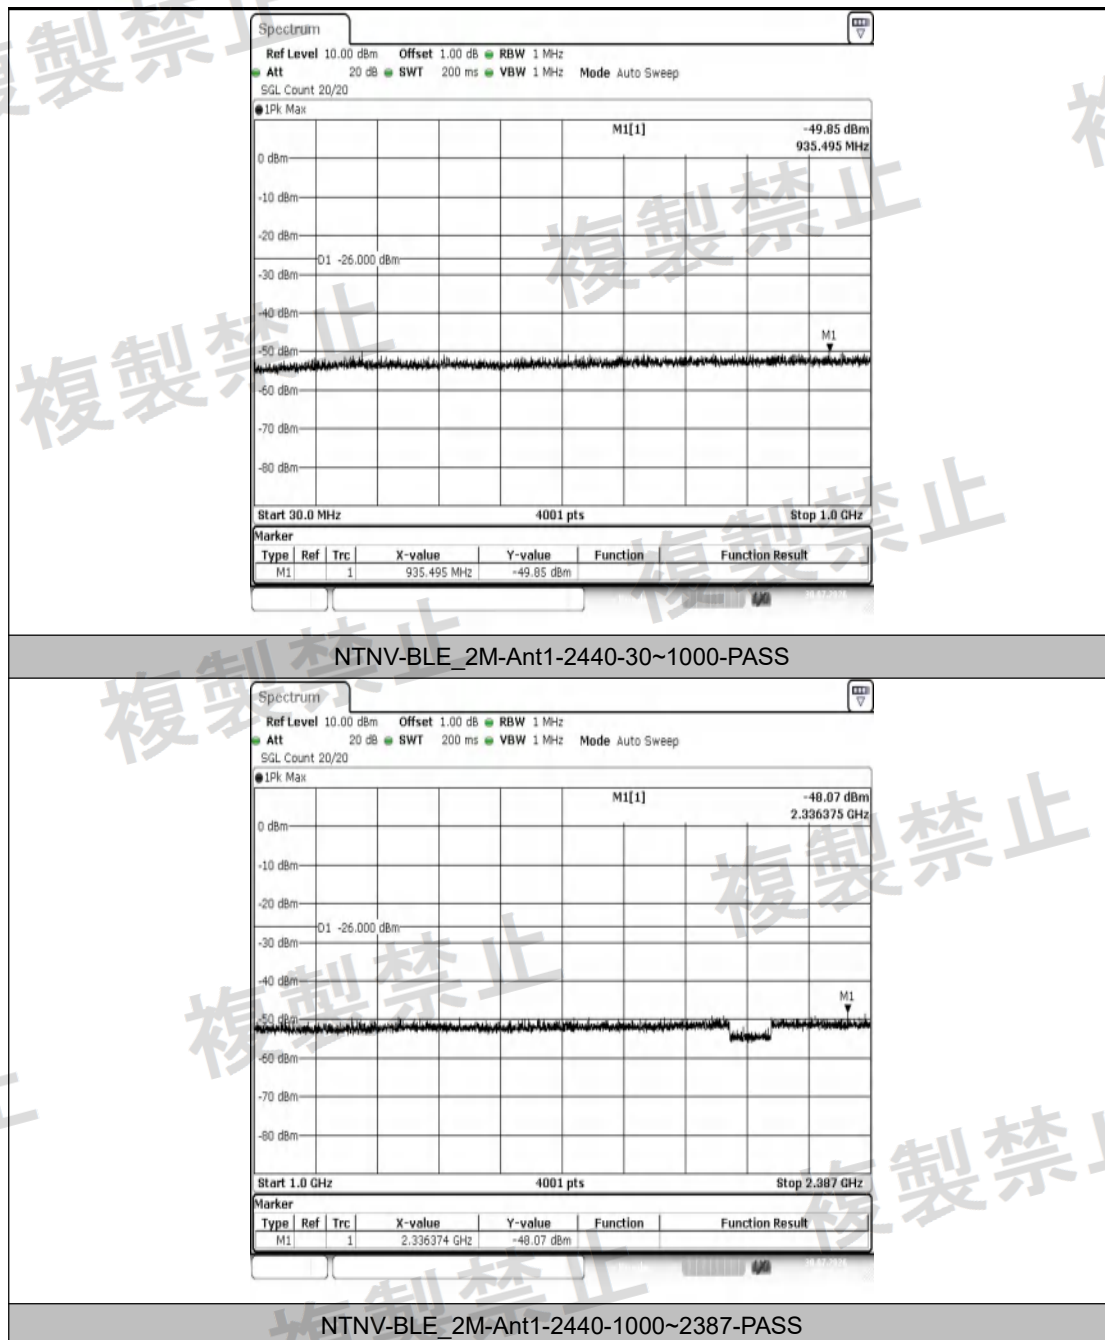

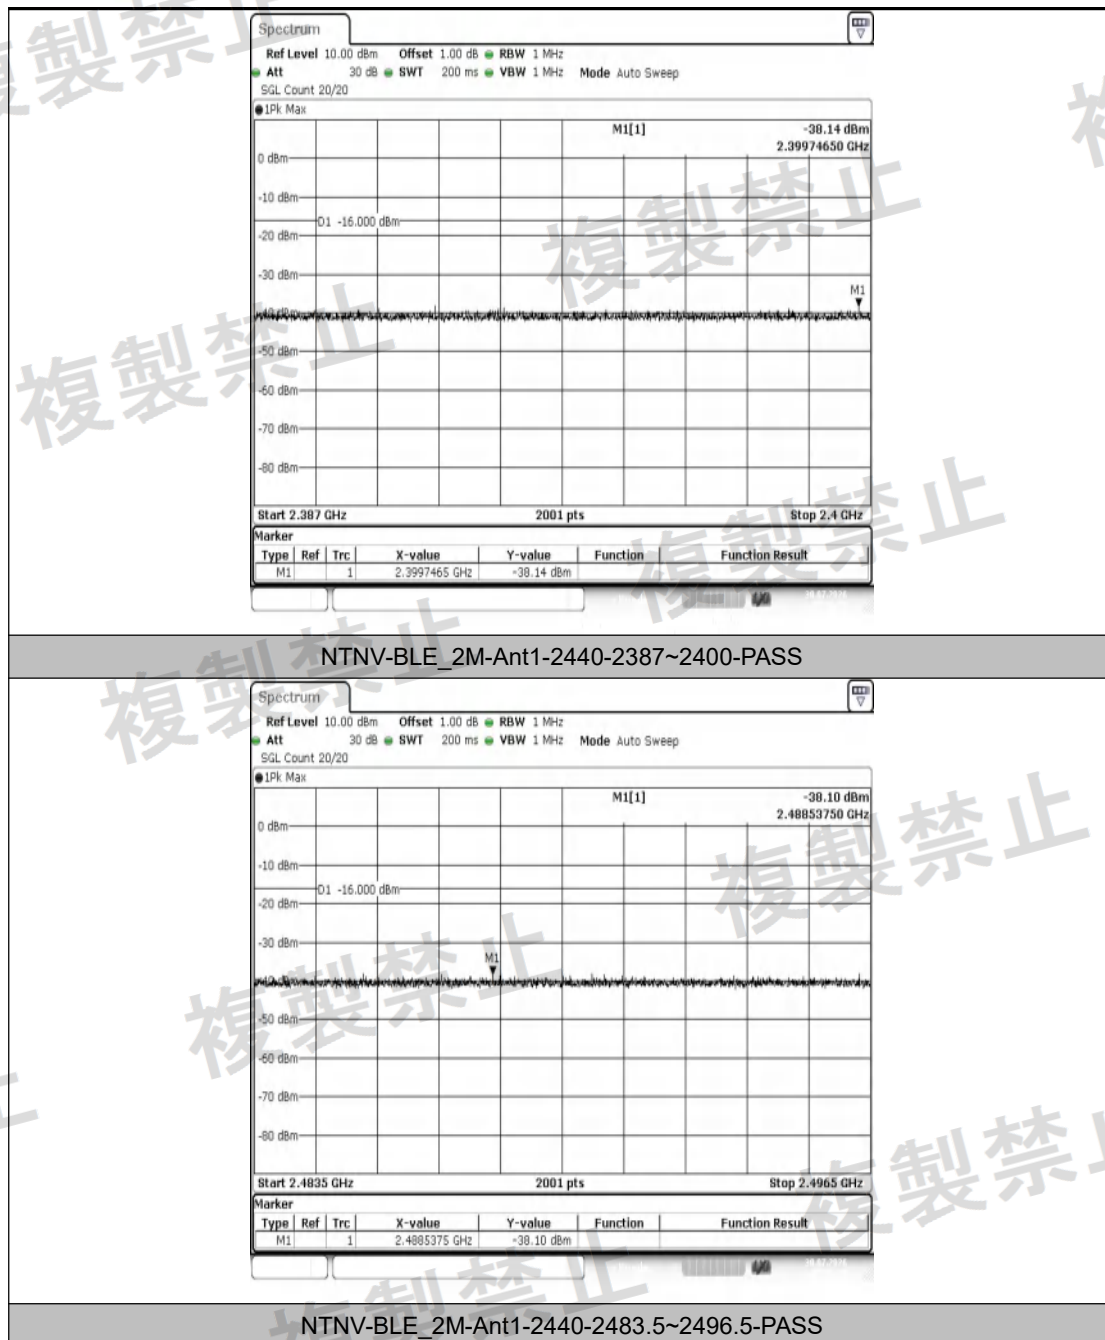

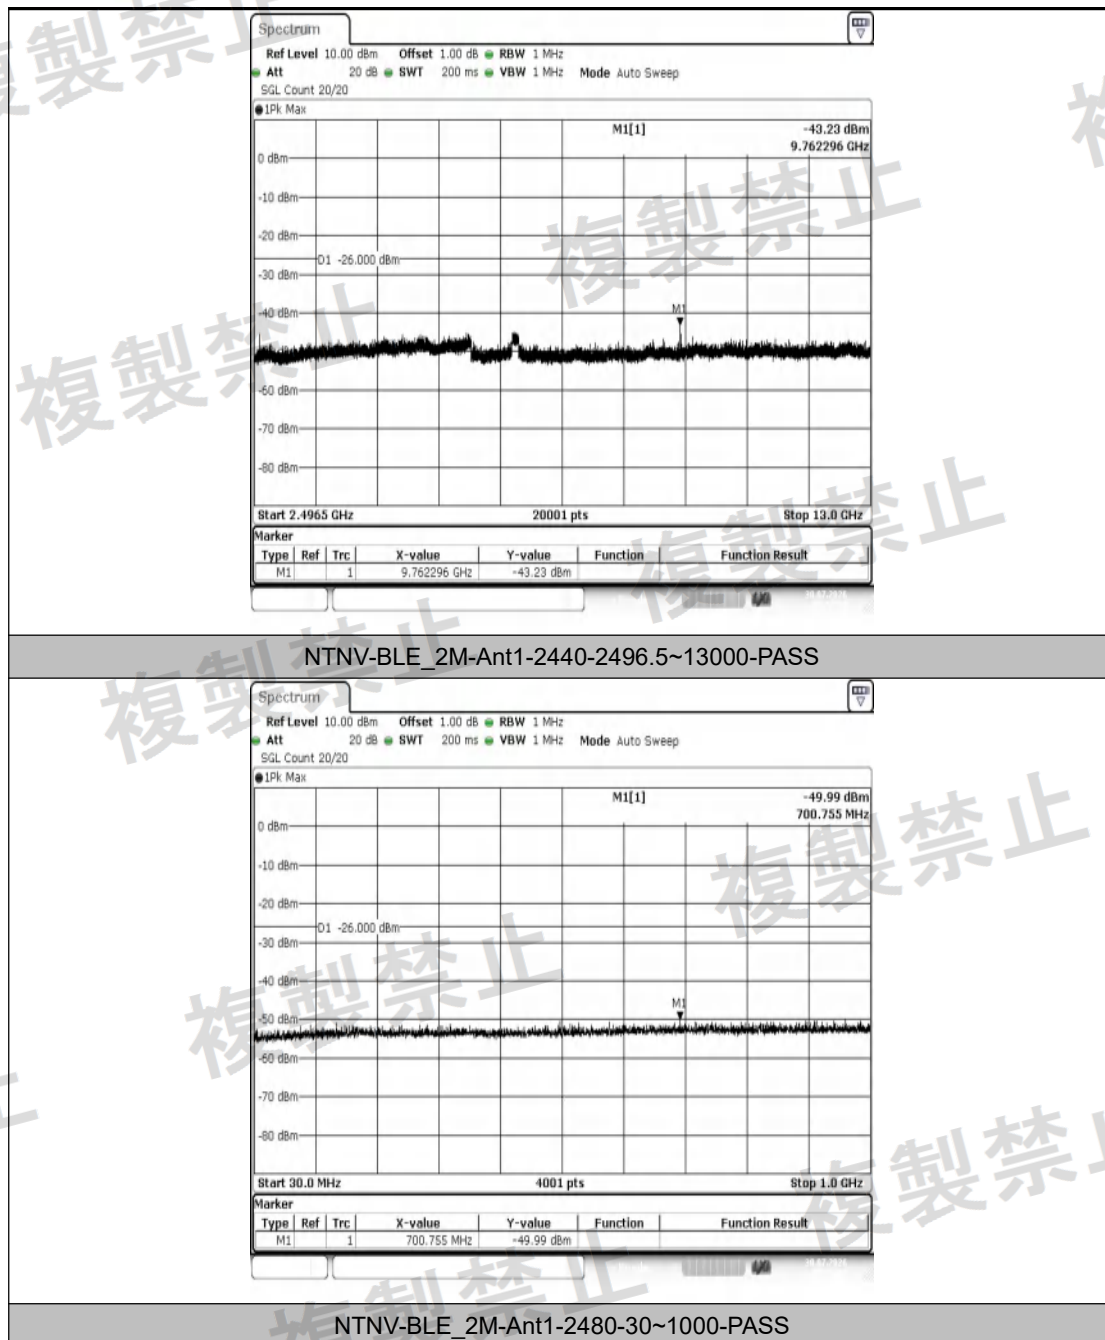

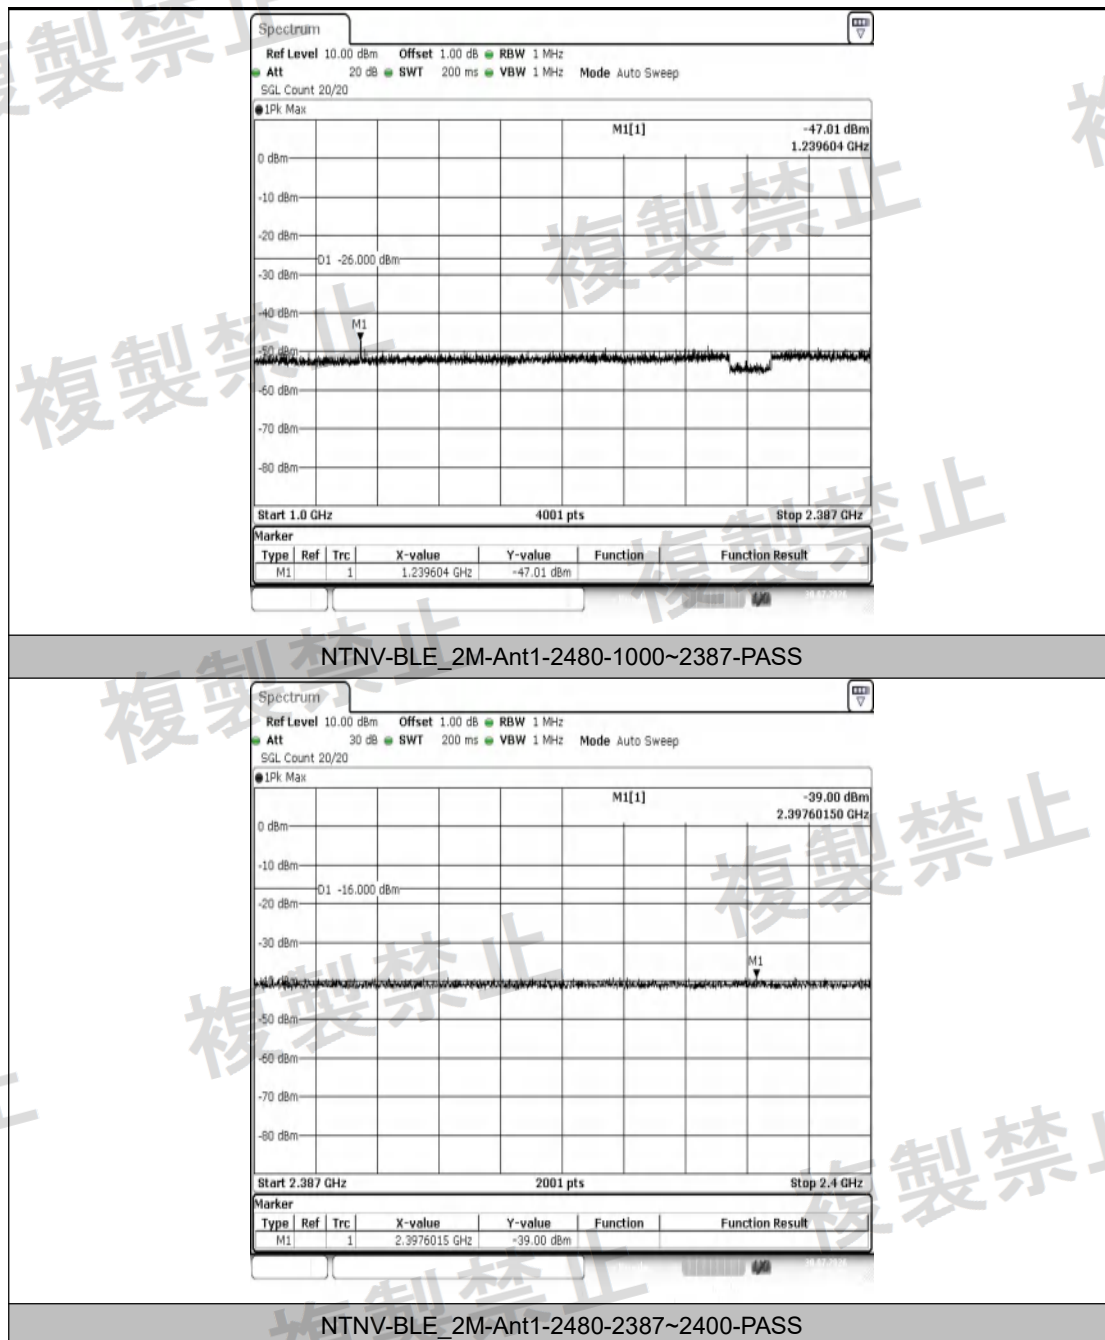

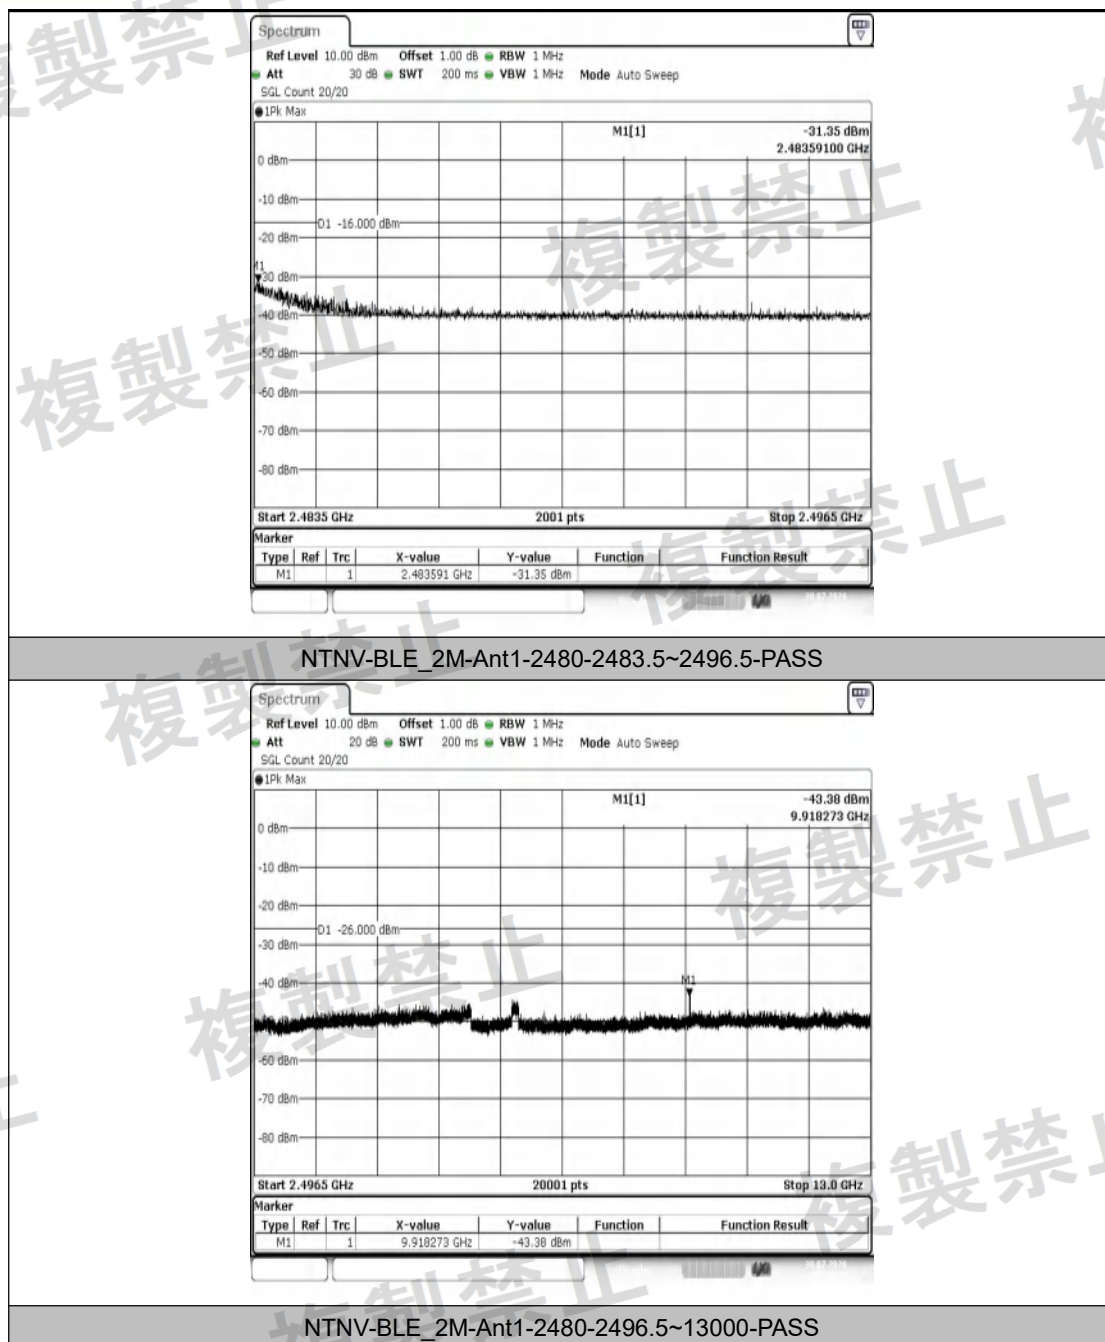

Test Result-Right

Test Condition	Test Mode	Antenna	Freq. [MHz]	Freq.Range [MHz]	Freq. [MHz]	Result [dBm/MHz]	Limit [dBm/MHz]	Result [μ W/MHz]	Limit [μ W/MHz]	Verdict
NTNV	BLE_1M	Ant1	2402	30~1000	903.73	-50.48	≤ -26	0.00895	≤ 2.5	PASS
NTNV	BLE_1M	Ant1	2402	1000~2387	2210.16	-42.59	≤ -26	0.05508	≤ 2.5	PASS
NTNV	BLE_1M	Ant1	2402	2387~2400	2399.95	-22.72	≤ -16	5.34564	≤ 25	PASS
NTNV	BLE_1M	Ant1	2402	2483.5~2496.5	2491.27	-37.95	≤ -16	0.16032	≤ 25	PASS
NTNV	BLE_1M	Ant1	2402	2496.5~13000	2593.66	-41.83	≤ -26	0.06561	≤ 2.5	PASS
NTNV	BLE_1M	Ant1	2440	30~1000	200.96	-49.72	≤ -26	0.01067	≤ 2.5	PASS
NTNV	BLE_1M	Ant1	2440	1000~2387	2248.30	-42.05	≤ -26	0.06237	≤ 2.5	PASS
NTNV	BLE_1M	Ant1	2440	2387~2400	2390.07	-38.07	≤ -16	0.15596	≤ 25	PASS
NTNV	BLE_1M	Ant1	2440	2483.5~2496.5	2483.69	-37.41	≤ -16	0.18155	≤ 25	PASS
NTNV	BLE_1M	Ant1	2440	2496.5~13000	2632.52	-42.86	≤ -26	0.05176	≤ 2.5	PASS
NTNV	BLE_1M	Ant1	2480	30~1000	795.09	-50.03	≤ -26	0.00993	≤ 2.5	PASS
NTNV	BLE_1M	Ant1	2480	1000~2387	2288.52	-41.09	≤ -26	0.07780	≤ 2.5	PASS
NTNV	BLE_1M	Ant1	2480	2387~2400	2397.62	-38.27	≤ -16	0.14894	≤ 25	PASS
NTNV	BLE_1M	Ant1	2480	2483.5~2496.5	2483.56	-33.78	≤ -16	0.41879	≤ 25	PASS
NTNV	BLE_1M	Ant1	2480	2496.5~13000	2671.38	-43.16	≤ -26	0.04831	≤ 2.5	PASS
NTNV	BLE_2M	Ant1	2402	30~1000	841.89	-48.75	≤ -26	0.01334	≤ 2.5	PASS
NTNV	BLE_2M	Ant1	2402	1000~2387	2210.50	-43.22	≤ -26	0.04764	≤ 2.5	PASS
NTNV	BLE_2M	Ant1	2402	2387~2400	2400	-17.19	≤ -16	19.09853	≤ 25	See table below
NTNV	BLE_2M	Ant1	2402	2483.5~2496.5	2495.79	-38.28	≤ -16	0.14859	≤ 25	PASS
NTNV	BLE_2M	Ant1	2402	2496.5~13000	2594.18	-41.87	≤ -26	0.06501	≤ 2.5	PASS
NTNV	BLE_2M	Ant1	2440	30~1000	926.04	-49.48	≤ -26	0.01127	≤ 2.5	PASS
NTNV	BLE_2M	Ant1	2440	1000~2387	1755.57	-39.18	≤ -26	0.12078	≤ 2.5	PASS
NTNV	BLE_2M	Ant1	2440	2387~2400	2398.56	-38.36	≤ -16	0.14588	≤ 25	PASS
NTNV	BLE_2M	Ant1	2440	2483.5~2496.5	2491.93	-37.97	≤ -16	0.15959	≤ 25	PASS
NTNV	BLE_2M	Ant1	2440	2496.5~13000	2632.52	-43.13	≤ -26	0.04864	≤ 2.5	PASS
NTNV	BLE_2M	Ant1	2480	30~1000	830.01	-26.20	≤ -26	2.39883	≤ 2.5	See table below
NTNV	BLE_2M	Ant1	2480	1000~2387	2288.87	-41.05	≤ -26	0.07852	≤ 2.5	PASS
NTNV	BLE_2M	Ant1	2480	2387~2400	2397.58	-38.22	≤ -16	0.15066	≤ 25	PASS
NTNV	BLE_2M	Ant1	2480	2483.5~2496.5	2484.48	-35.21	≤ -16	0.30130	≤ 25	PASS
NTNV	BLE_2M	Ant1	2480	2496.5~13000	2672.43	-43.62	≤ -26	0.04345	≤ 2.5	PASS




Test Result_Step2-Right


Test Condition	Test Mode	Antenna	Freq. [MHz]	Freq. [MHz]	Result [dBm/MHz]	Limit [dBm/MHz]	Result [μW/MHz]	Limit [μW/MHz]	Verdict
NTNV	BLE_2M	Ant1	2402	2400.00	-21.79	≤-16	6.62217	≤25	PASS
NTNV	BLE_2M	Ant1	2480	830.01	-91.29	≤-26	0.00000	≤2.5	PASS



Test Graphs-Right

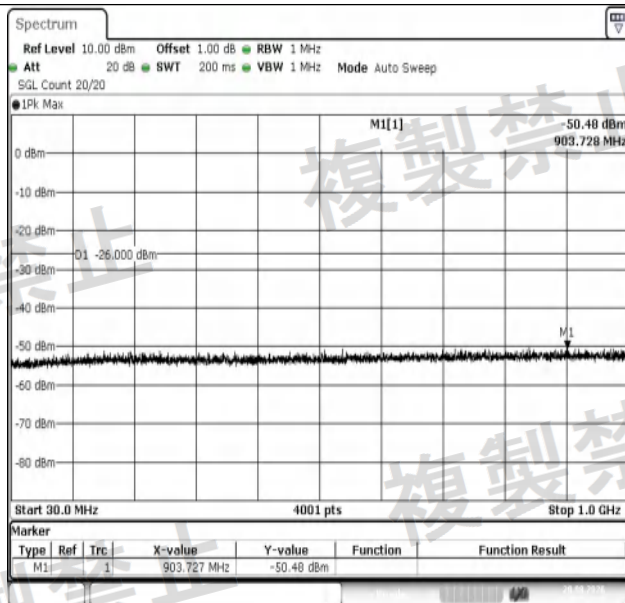



NTNV-BLE_1M-Ant1-2402-30~1000-PASS

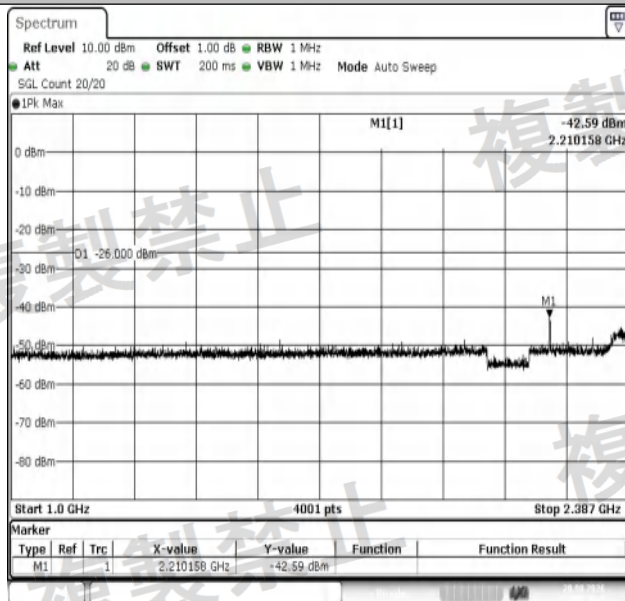


NTNV-BLE_1M-Ant1-2402-1000~2387-PASS




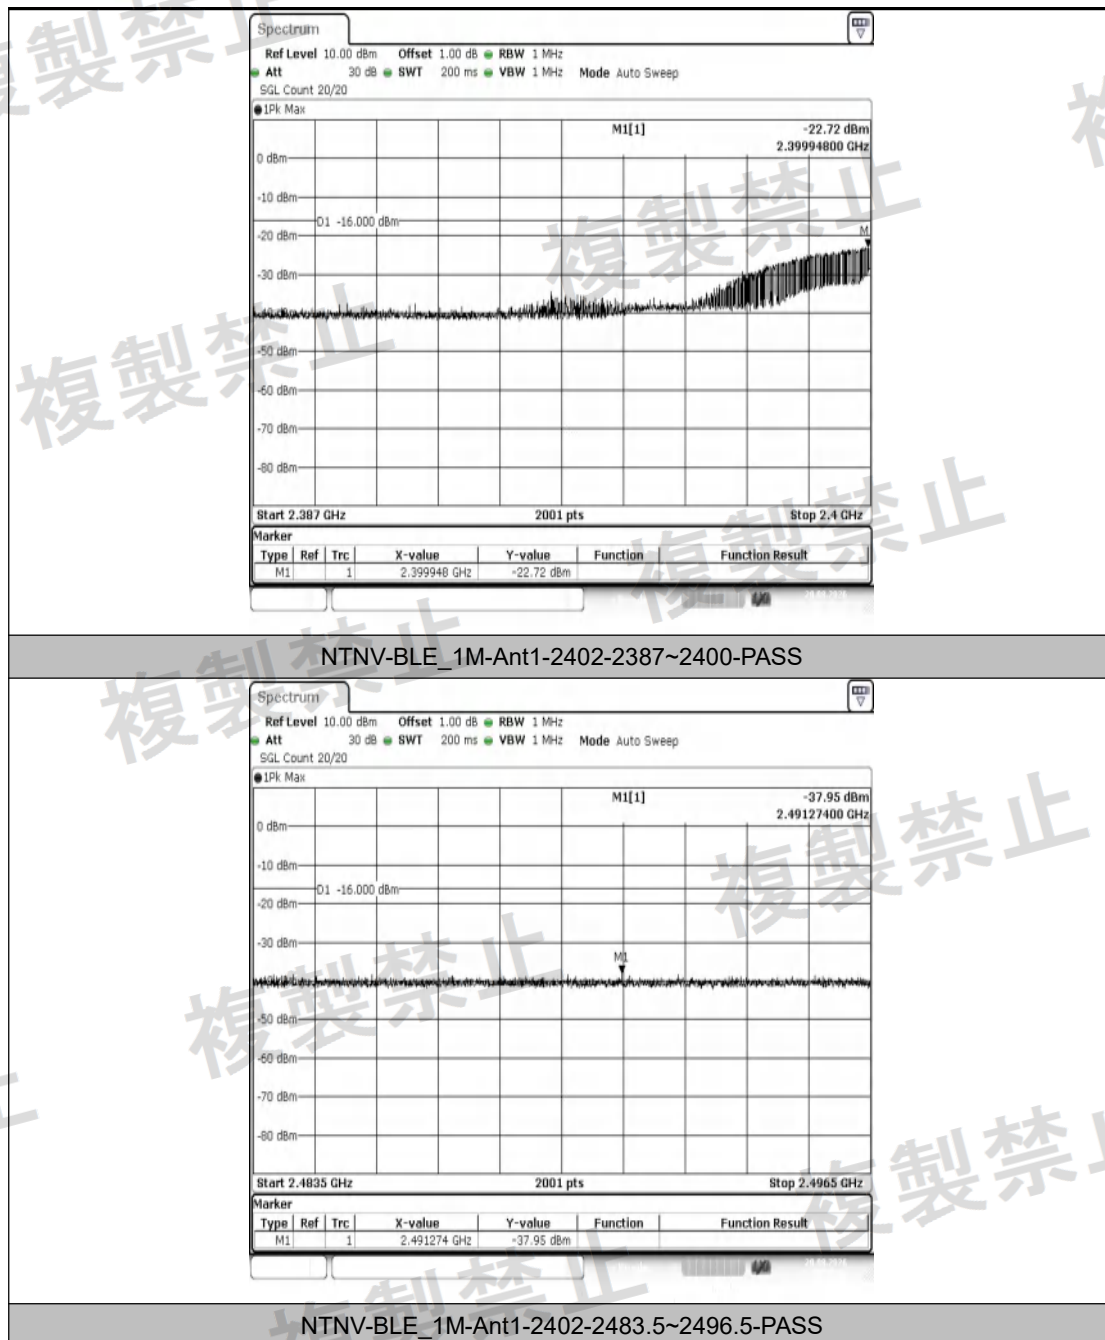

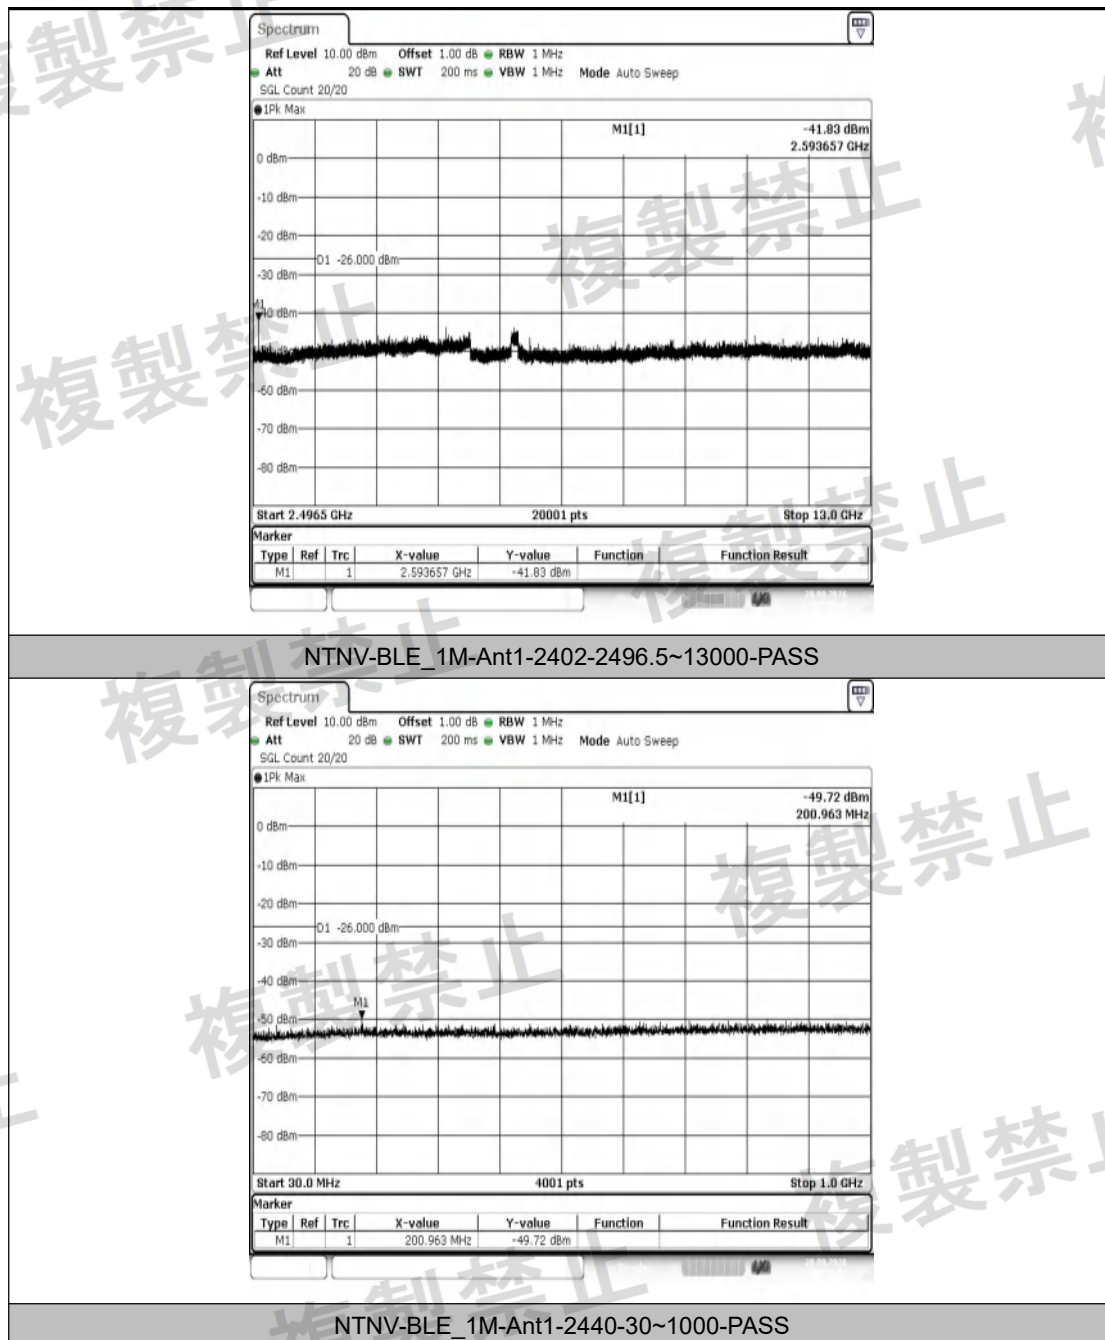

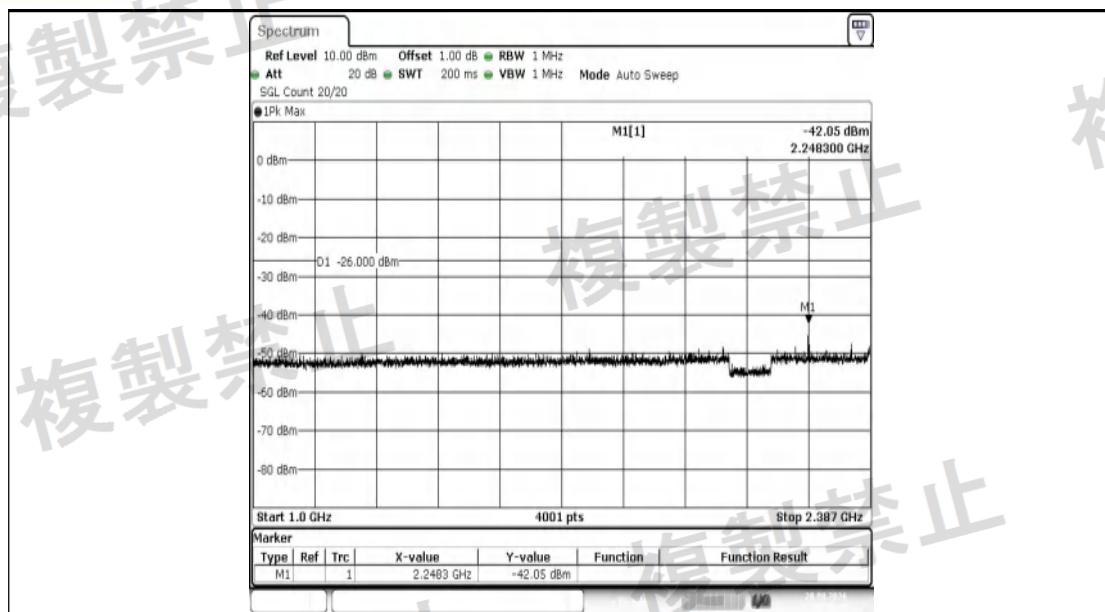



NTNV-BLE_1M-Ant1-2440-1000~2387-PASS

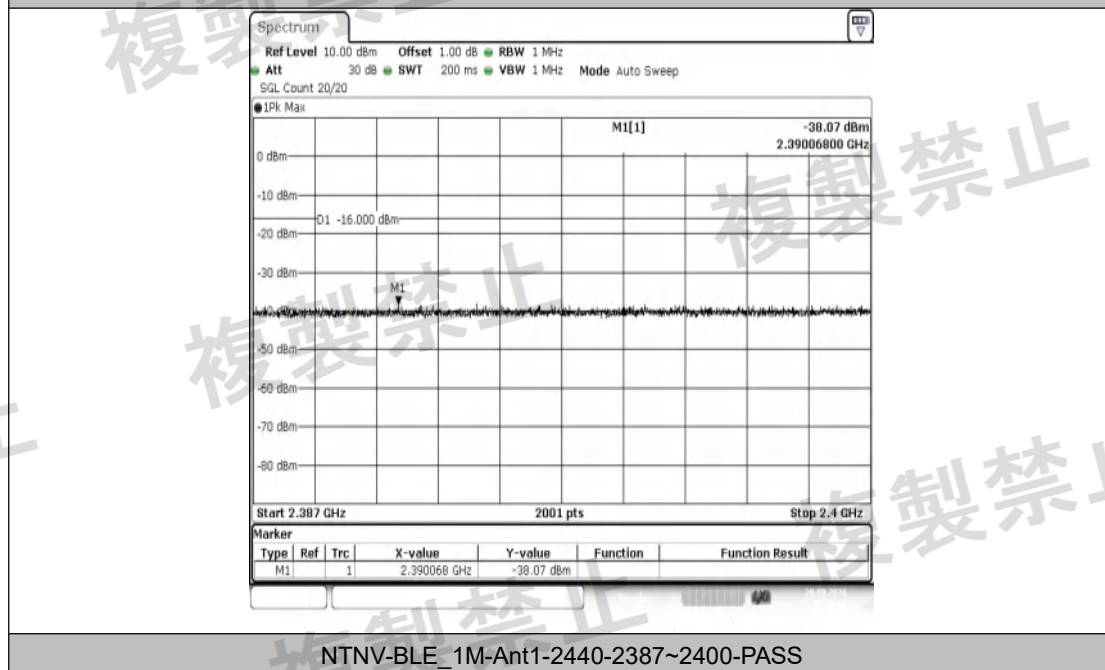



NTNV-BLE_1M-Ant1-2440-2387~2400-PASS




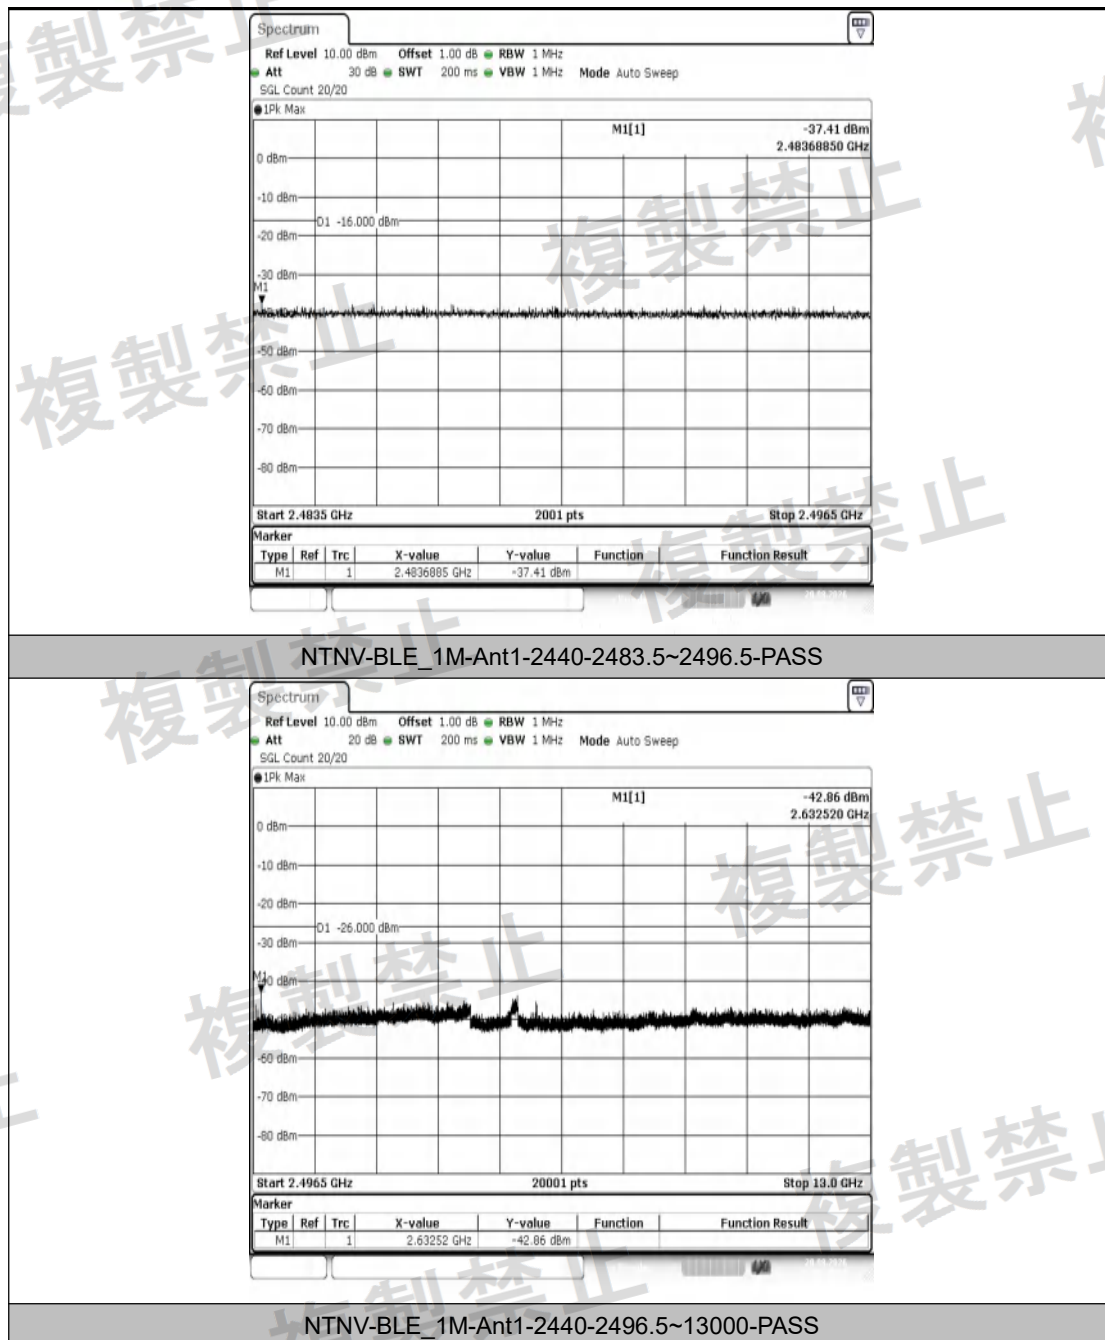


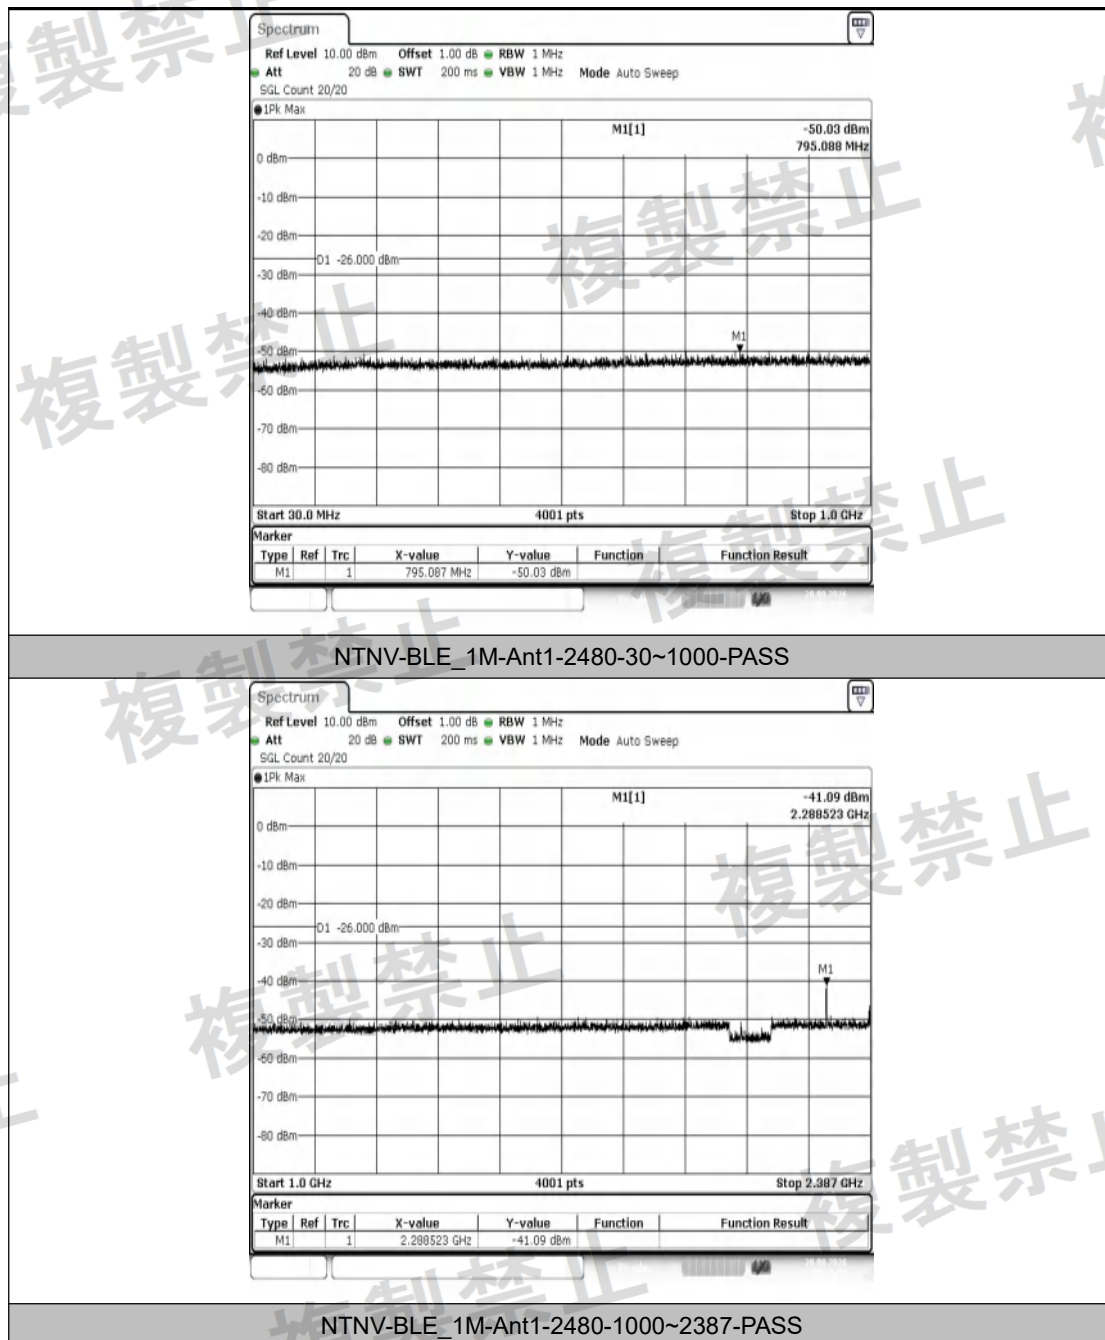

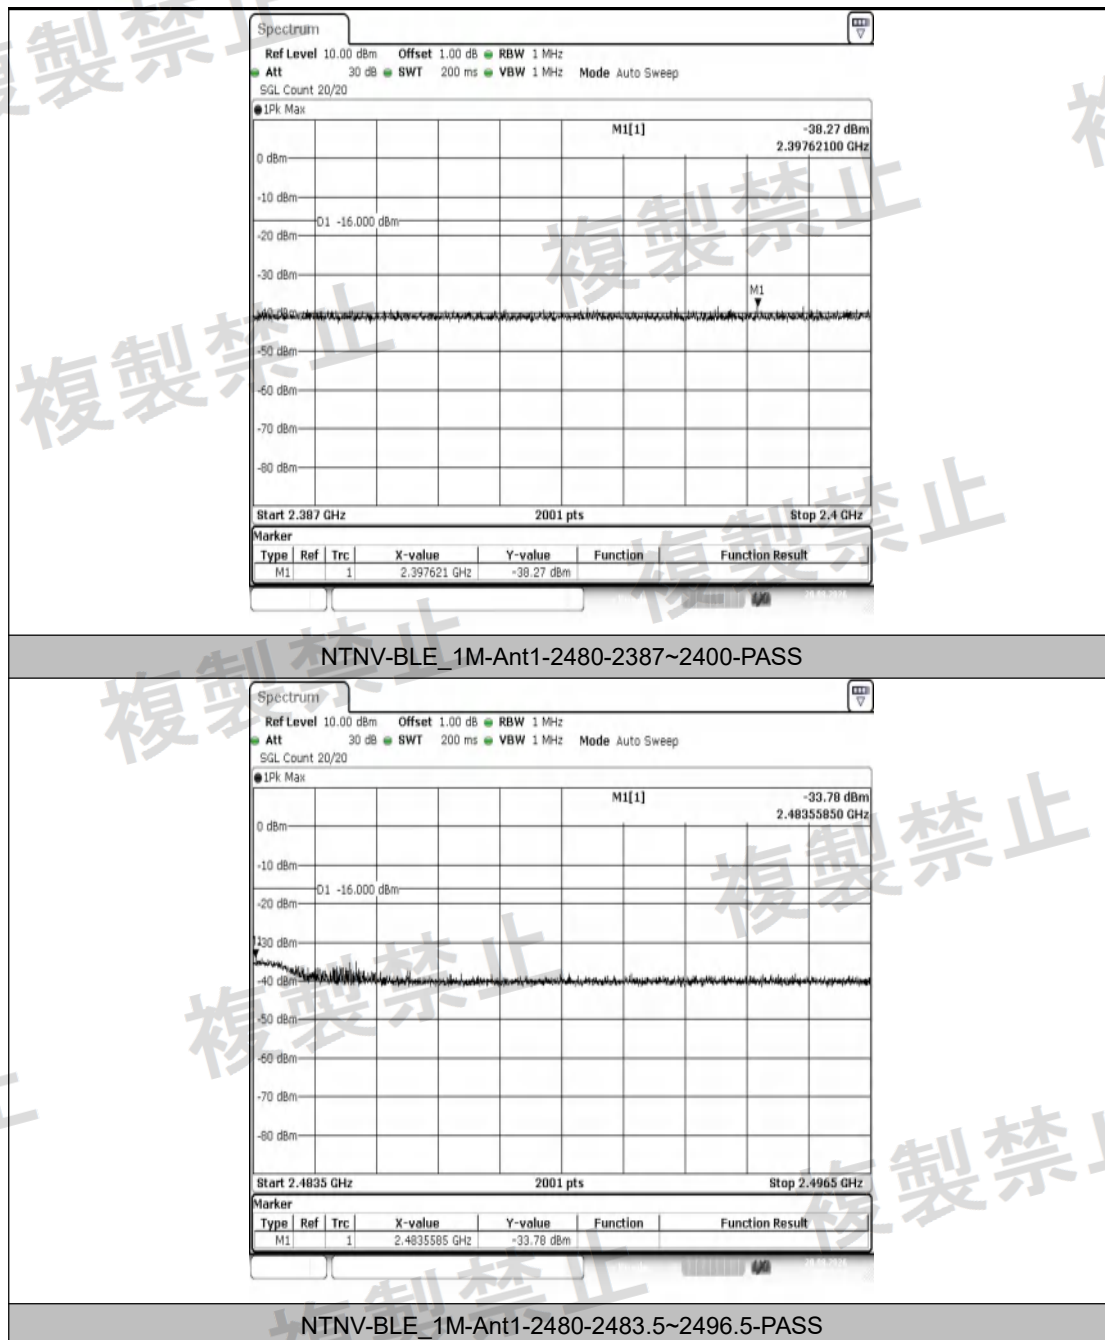


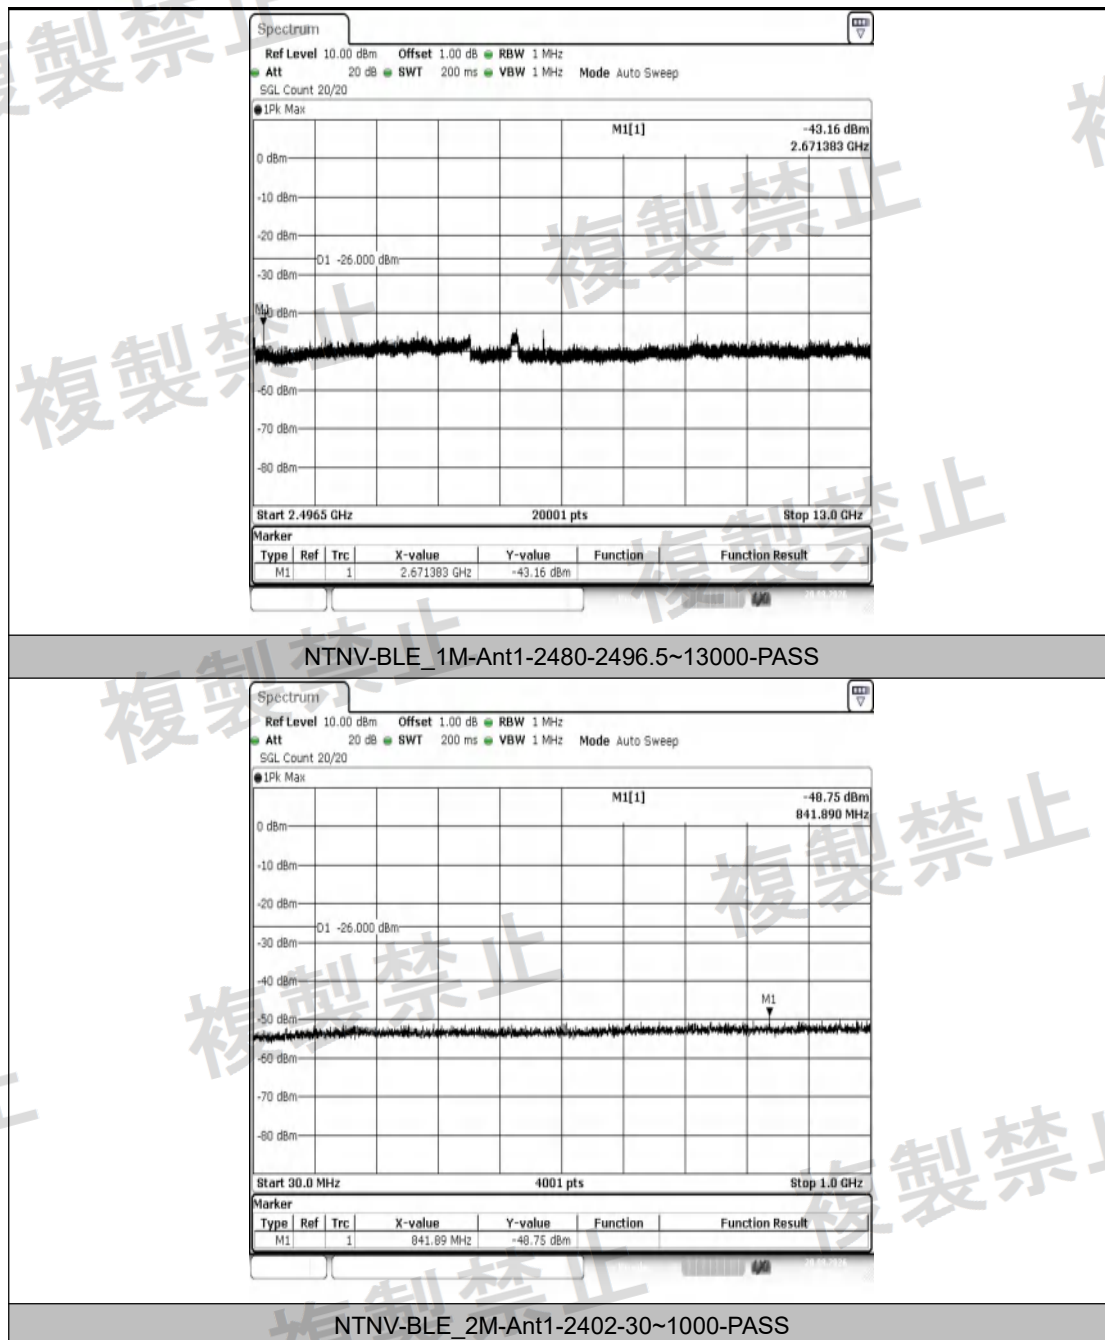

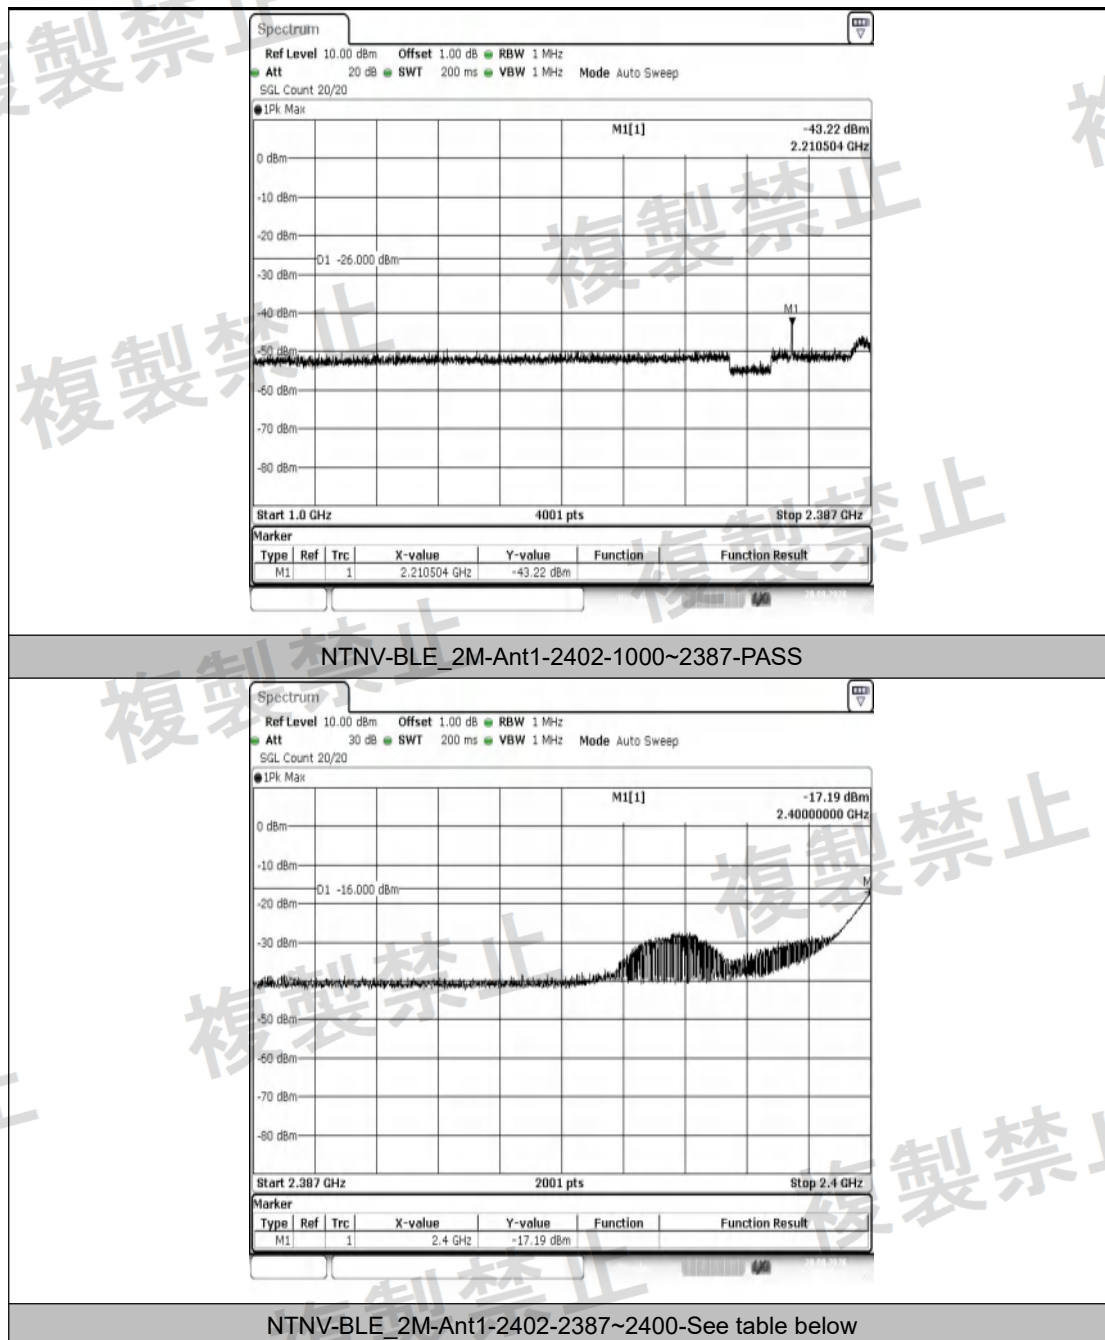

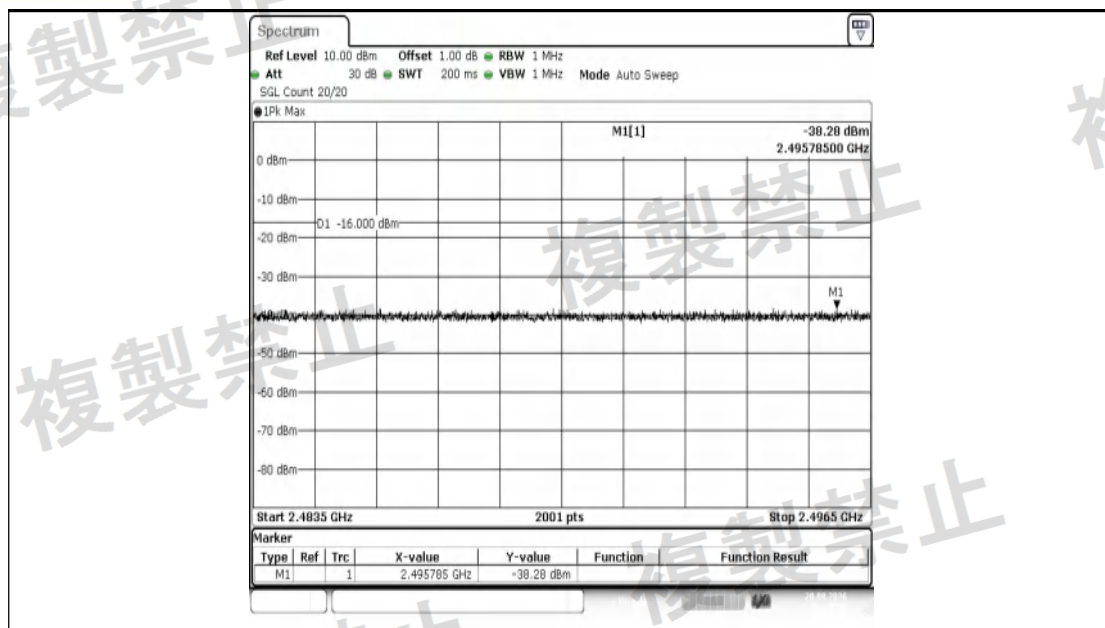



NTNV-BLE_2M-Ant1-2402-2483.5~2496.5-PASS

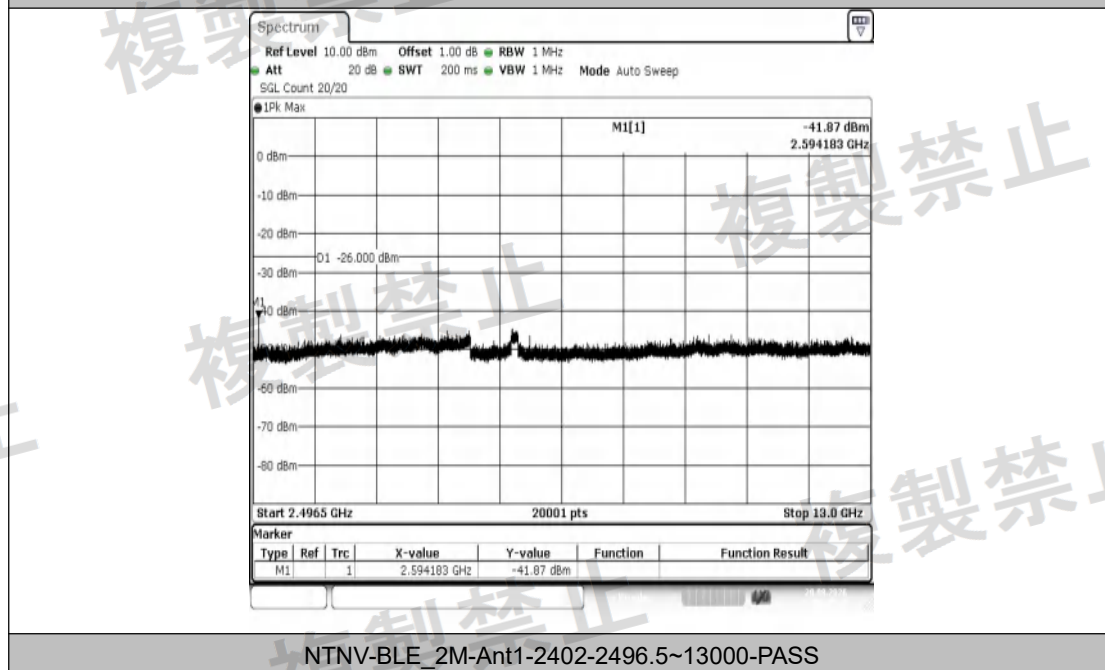


NTNV-BLE_2M-Ant1-2402-2496.5~13000-PASS




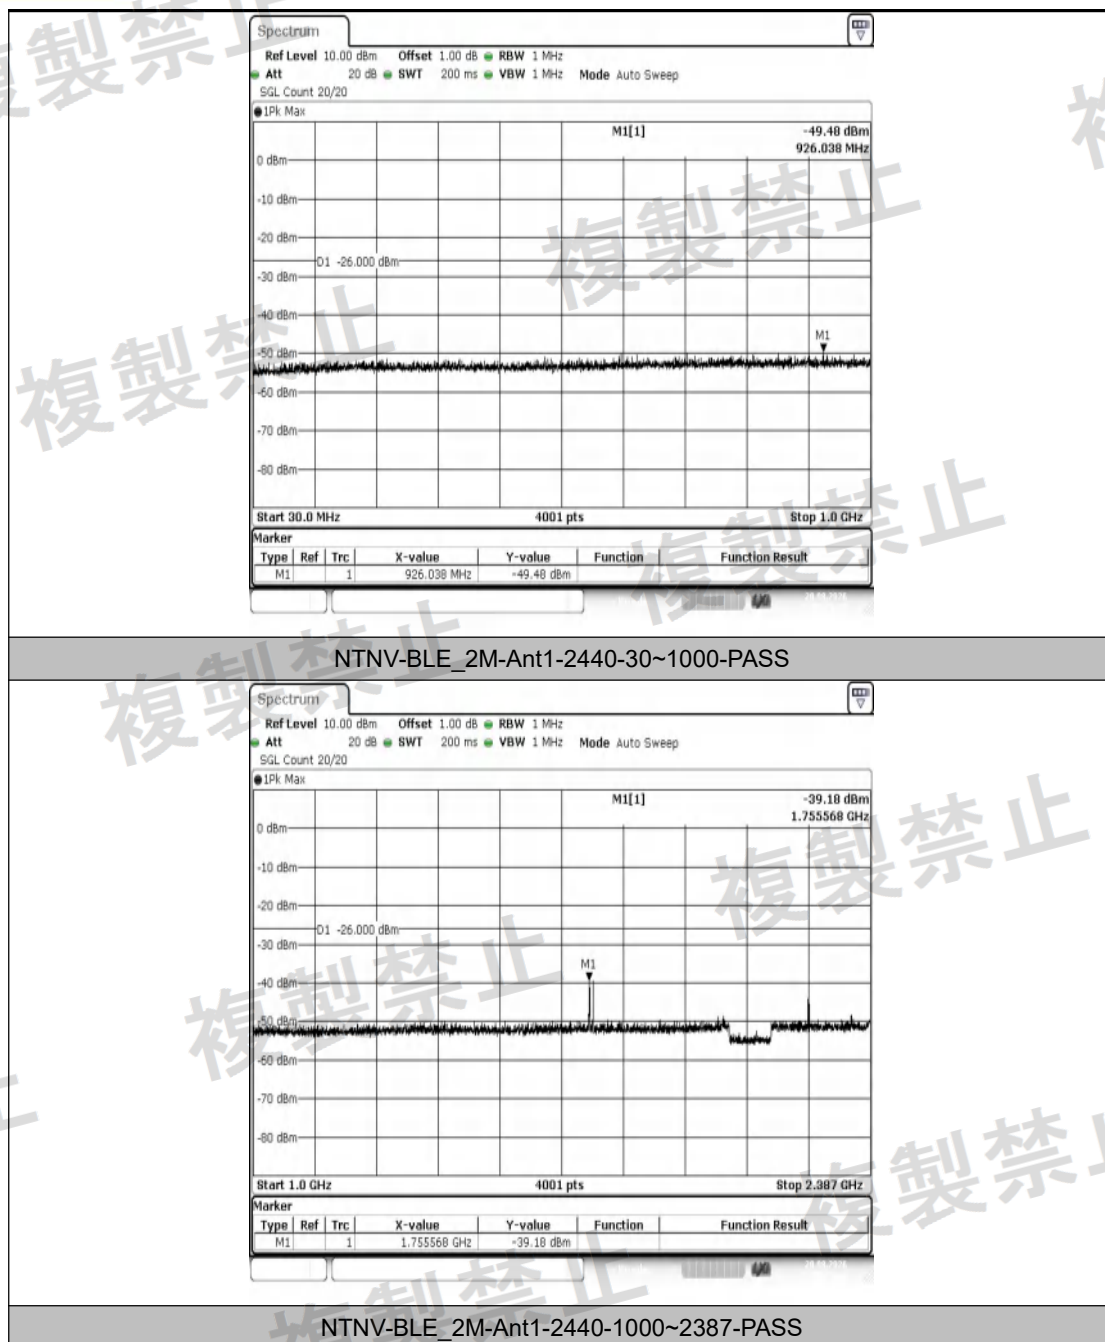

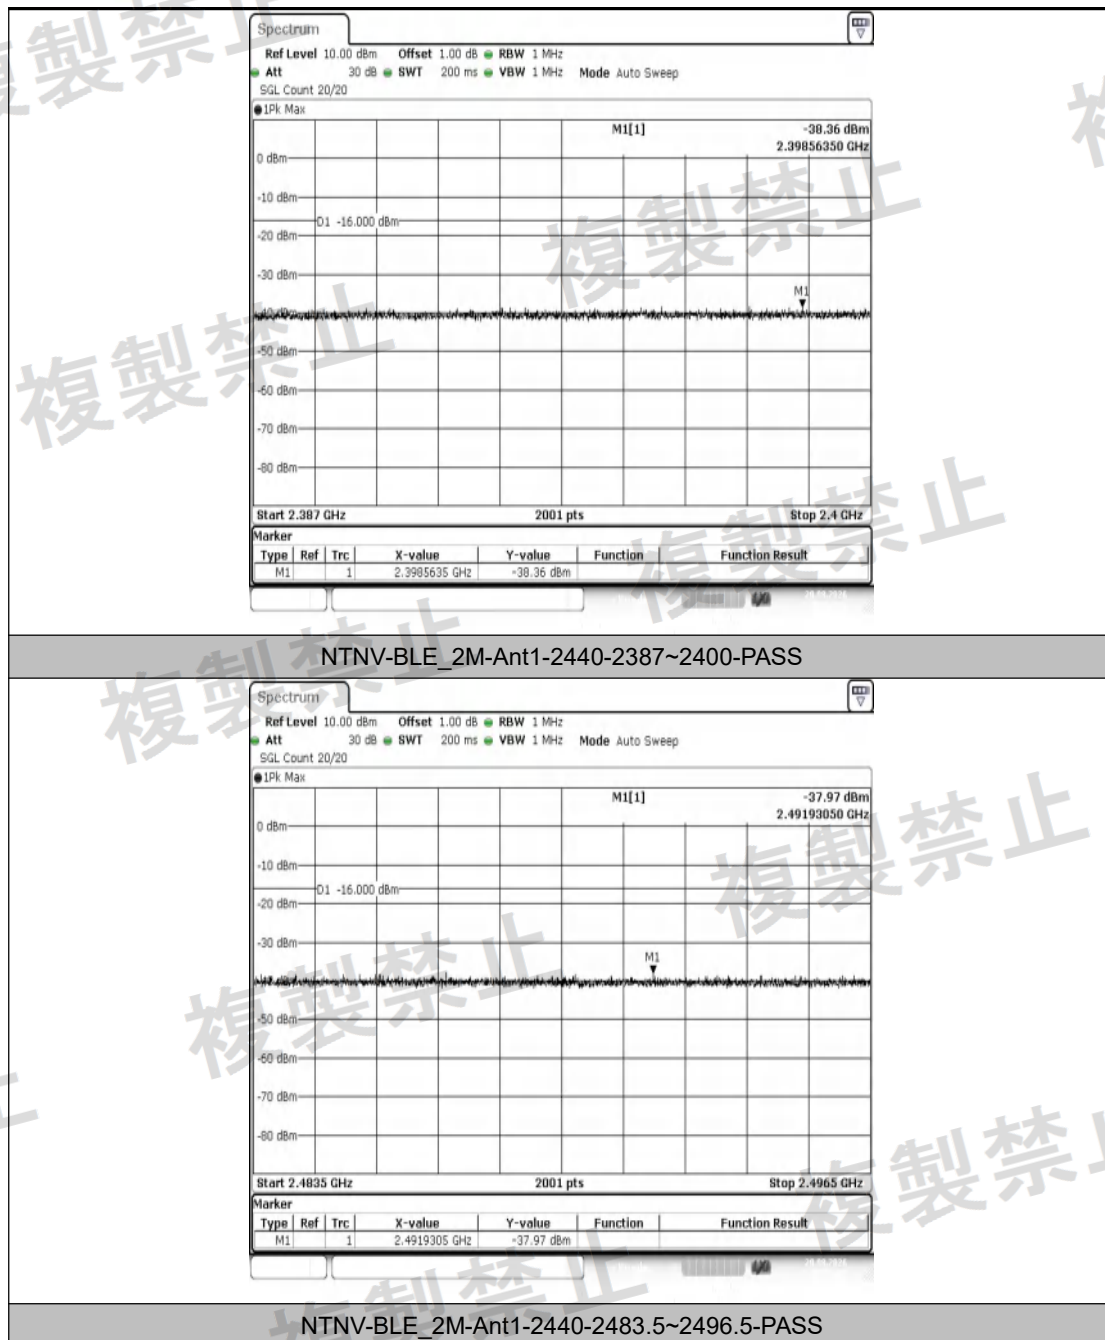

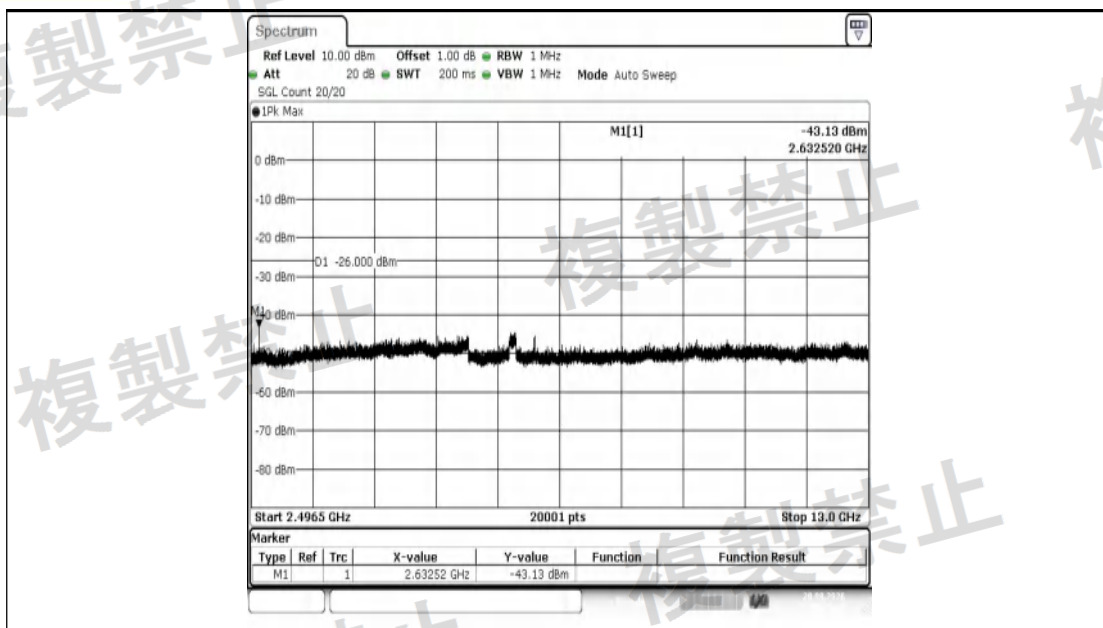



NTNV-BLE_2M-Ant1-2440-2496.5~13000-PASS

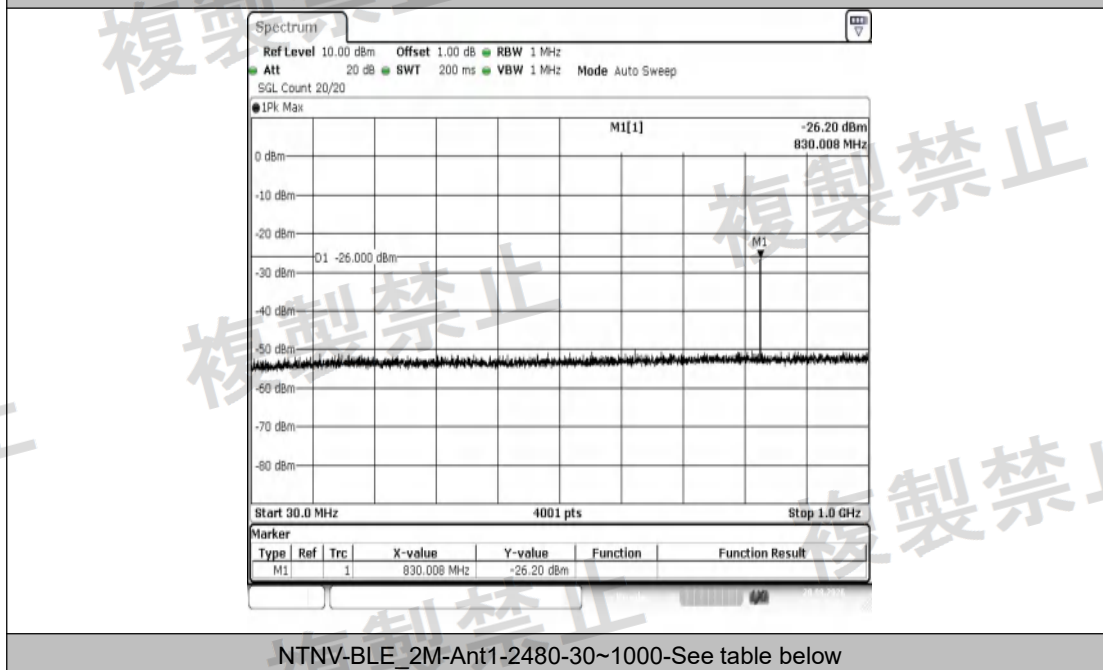


NTNV-BLE_2M-Ant1-2480-30~1000-See table below



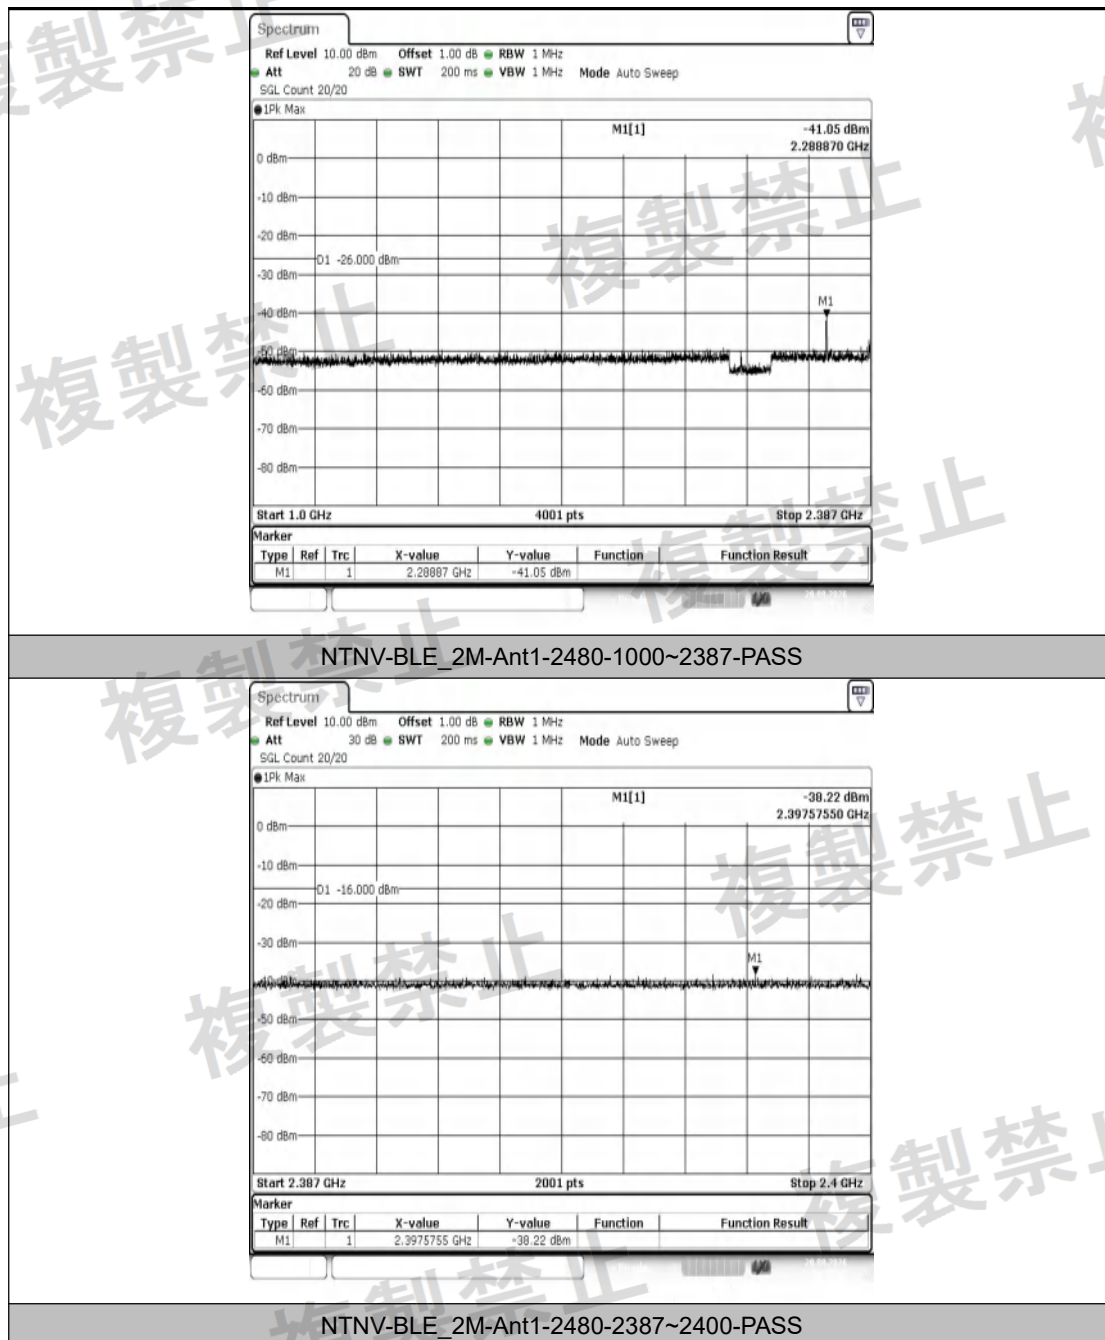

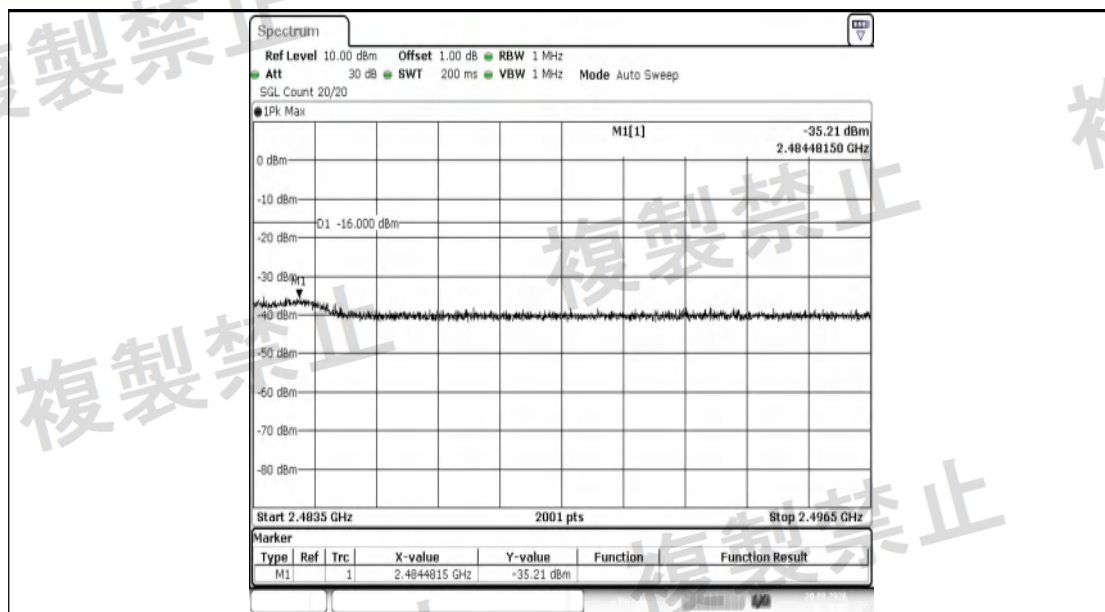


NTNV-BLE_2M-Ant1-2480-2483.5~2496.5-PASS

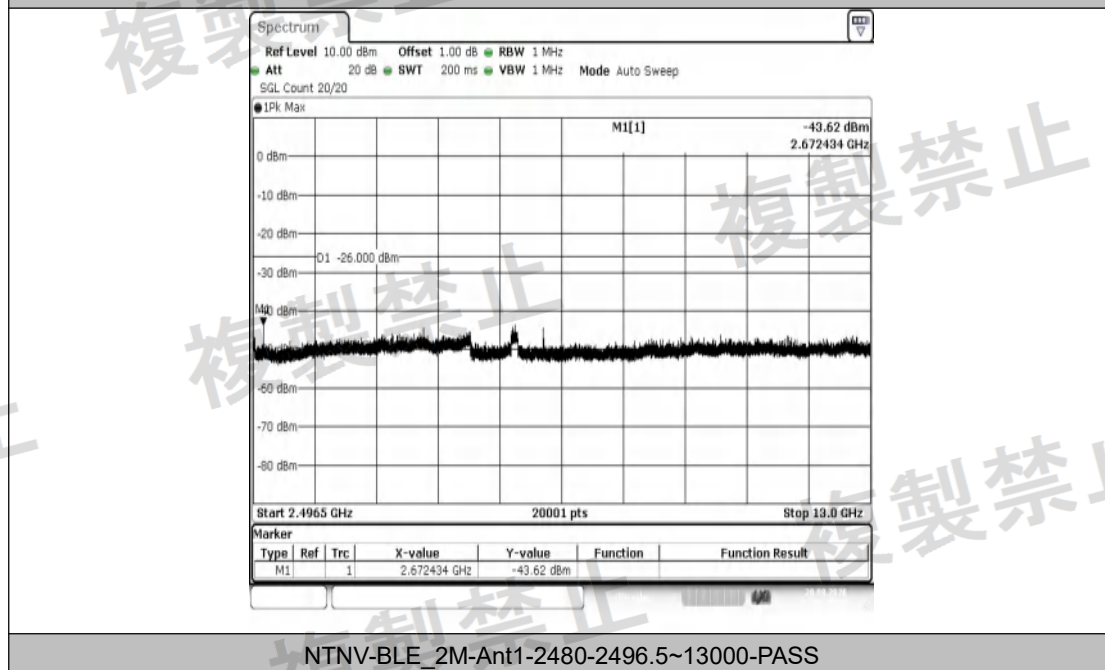


NTNV-BLE_2M-Ant1-2480-2496.5~13000-PASS




Test Graphs_Step2-Right

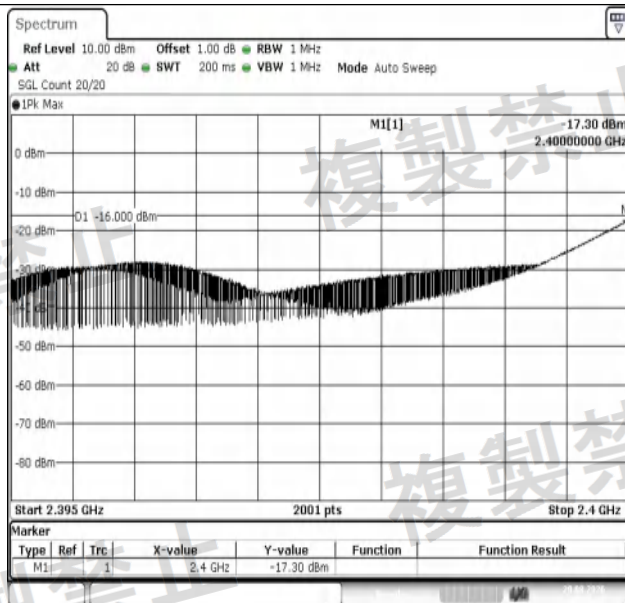

NTNV-BLE_2M-Ant1-2402-2387~2400-PASS

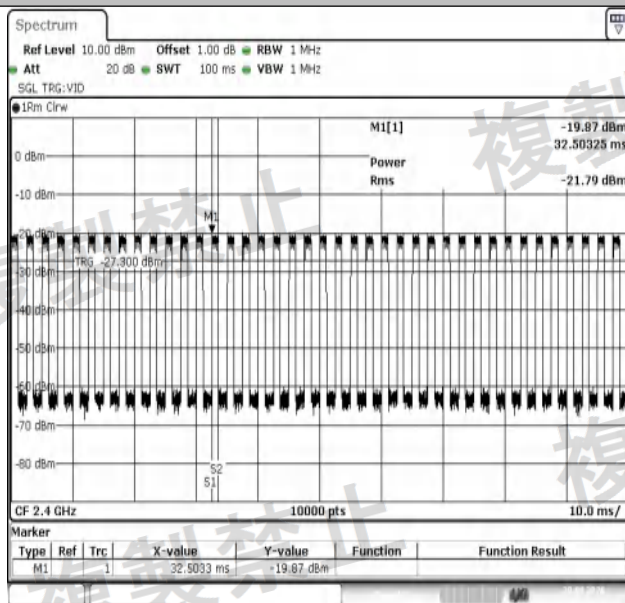

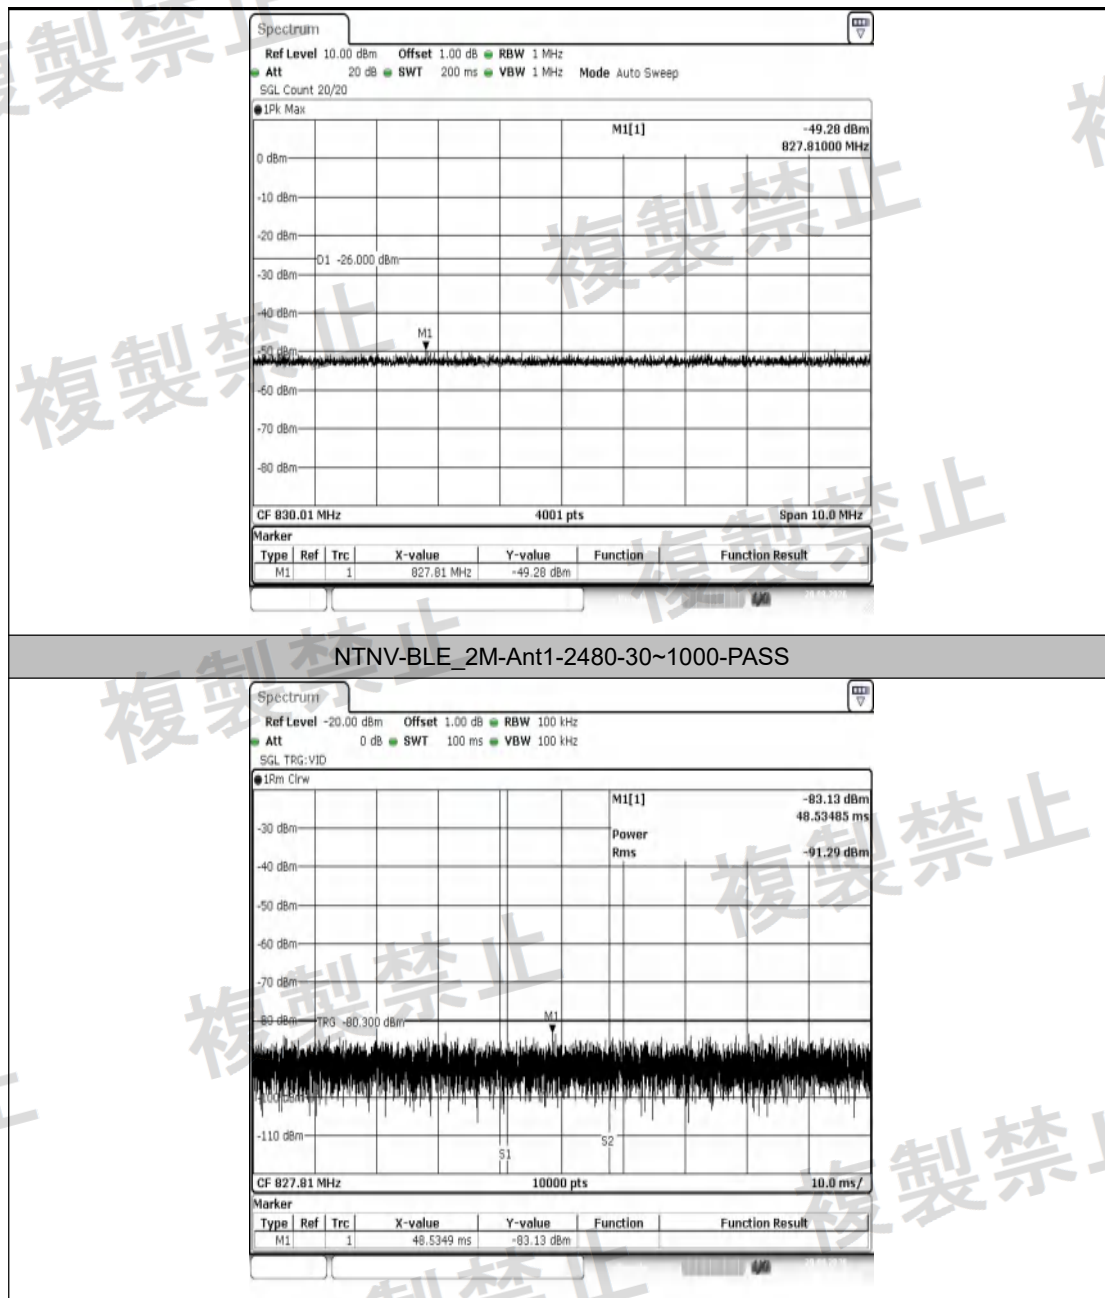


Appendix E: Spurious Emission of RX

Test Result-Left


Test Condition	Test Mode	Antenna	Freq. [MHz]	Freq.Range [MHz]	Freq. [MHz]	Result [dBm/MHz]	Limit [dBm]	Result [nW]	Limit [nW]	Verdict
NTNV	BLE_1M	Ant1	2402	30~1000	972.61	-82.09	≤-54	0.00618	≤4	PASS
NTNV	BLE_1M	Ant1	2402	1000~12500	6909.27	-66.14	≤-47	0.24322	≤20	PASS
NTNV	BLE_1M	Ant1	2440	30~1000	587.23	-81.97	≤-54	0.00635	≤4	PASS
NTNV	BLE_1M	Ant1	2440	1000~12500	6956.41	-65.62	≤-47	0.27416	≤20	PASS
NTNV	BLE_1M	Ant1	2480	30~1000	802.46	-81.45	≤-54	0.00716	≤4	PASS
NTNV	BLE_1M	Ant1	2480	1000~12500	6964.46	-66.31	≤-47	0.23388	≤20	PASS
NTNV	BLE_2M	Ant1	2402	30~1000	779.68	-80.93	≤-54	0.00807	≤4	PASS
NTNV	BLE_2M	Ant1	2402	1000~12500	6051.41	-65.71	≤-47	0.26853	≤20	PASS
NTNV	BLE_2M	Ant1	2440	30~1000	912.02	-81.74	≤-54	0.00670	≤4	PASS
NTNV	BLE_2M	Ant1	2440	1000~12500	6129.03	-65.95	≤-47	0.25410	≤20	PASS
NTNV	BLE_2M	Ant1	2480	30~1000	638.13	-82.33	≤-54	0.00585	≤4	PASS
NTNV	BLE_2M	Ant1	2480	1000~12500	6950.09	-65.75	≤-47	0.26607	≤20	PASS



Test Graphs-Left

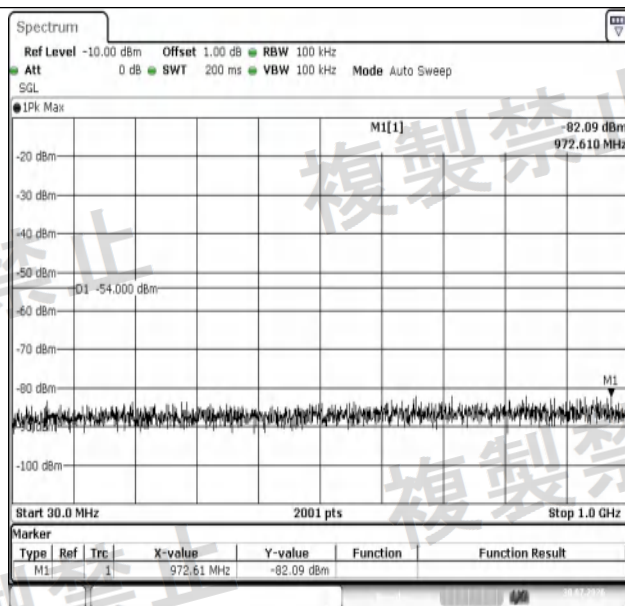


NTNV-BLE_1M-Ant1-2402-30~1000-PASS

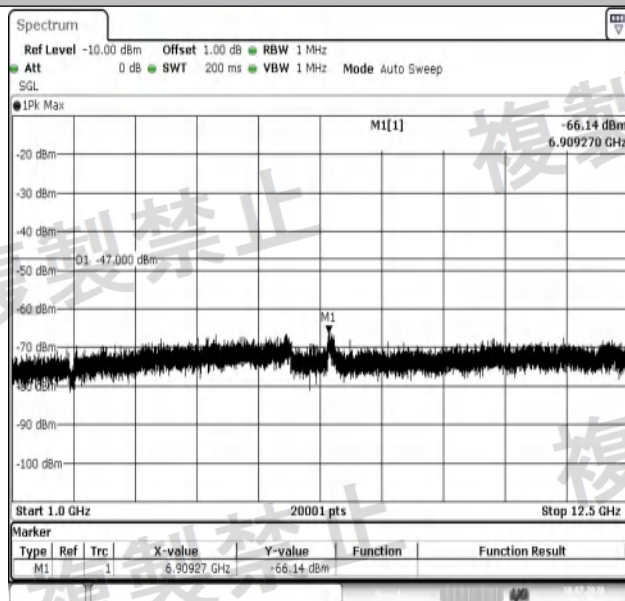


NTNV-BLE_1M-Ant1-2402-1000~12500-PASS



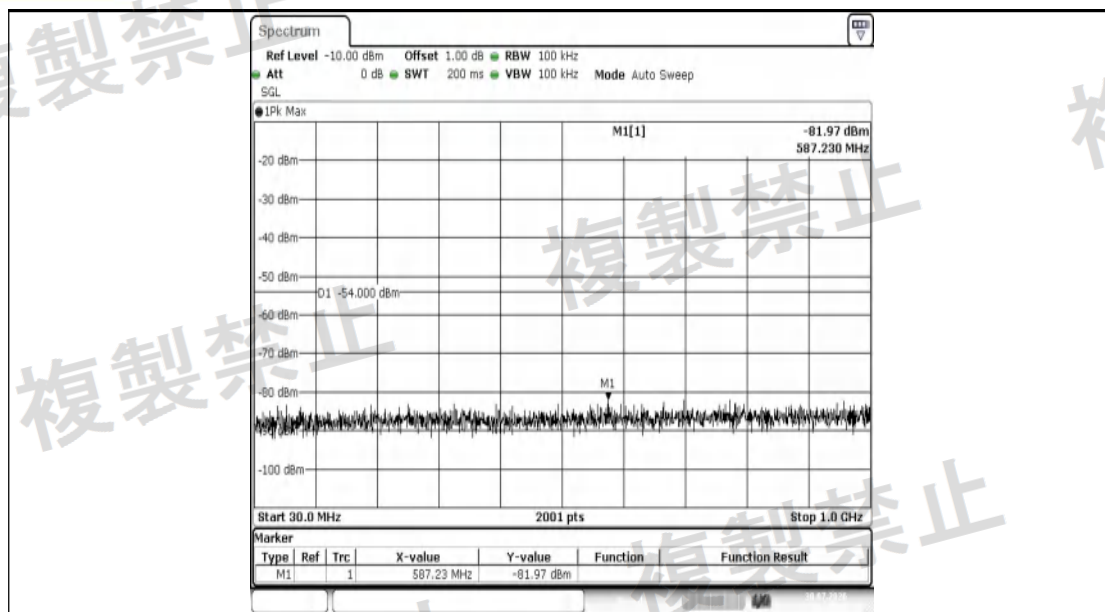



NTNV-BLE_1M-Ant1-2440-30~1000-PASS

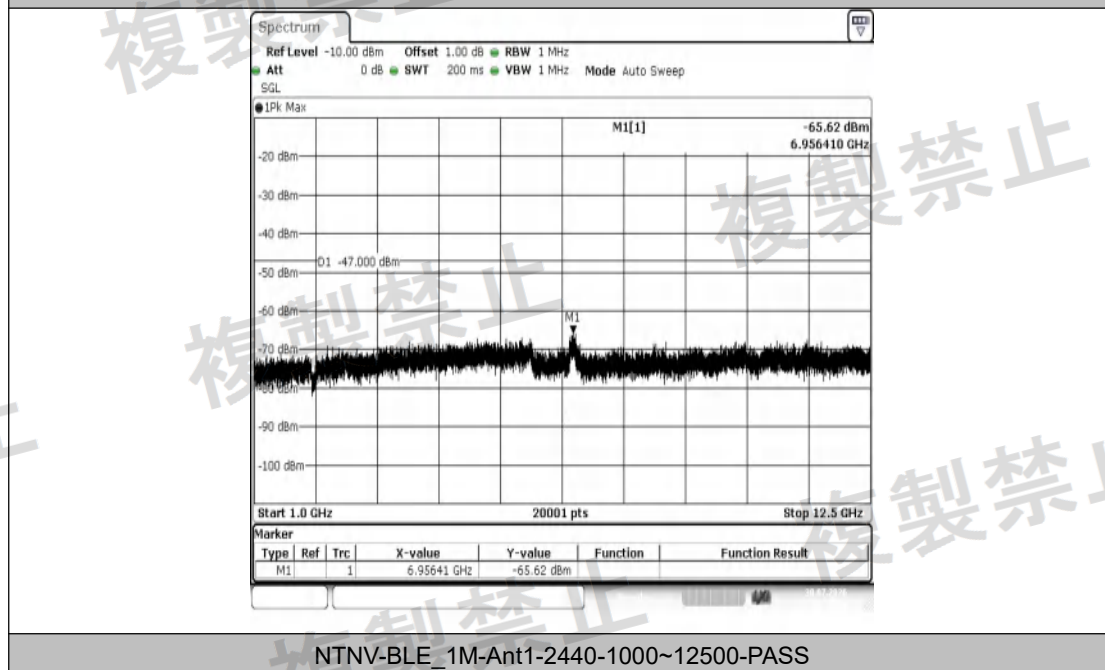


NTNV-BLE_1M-Ant1-2440-1000~12500-PASS



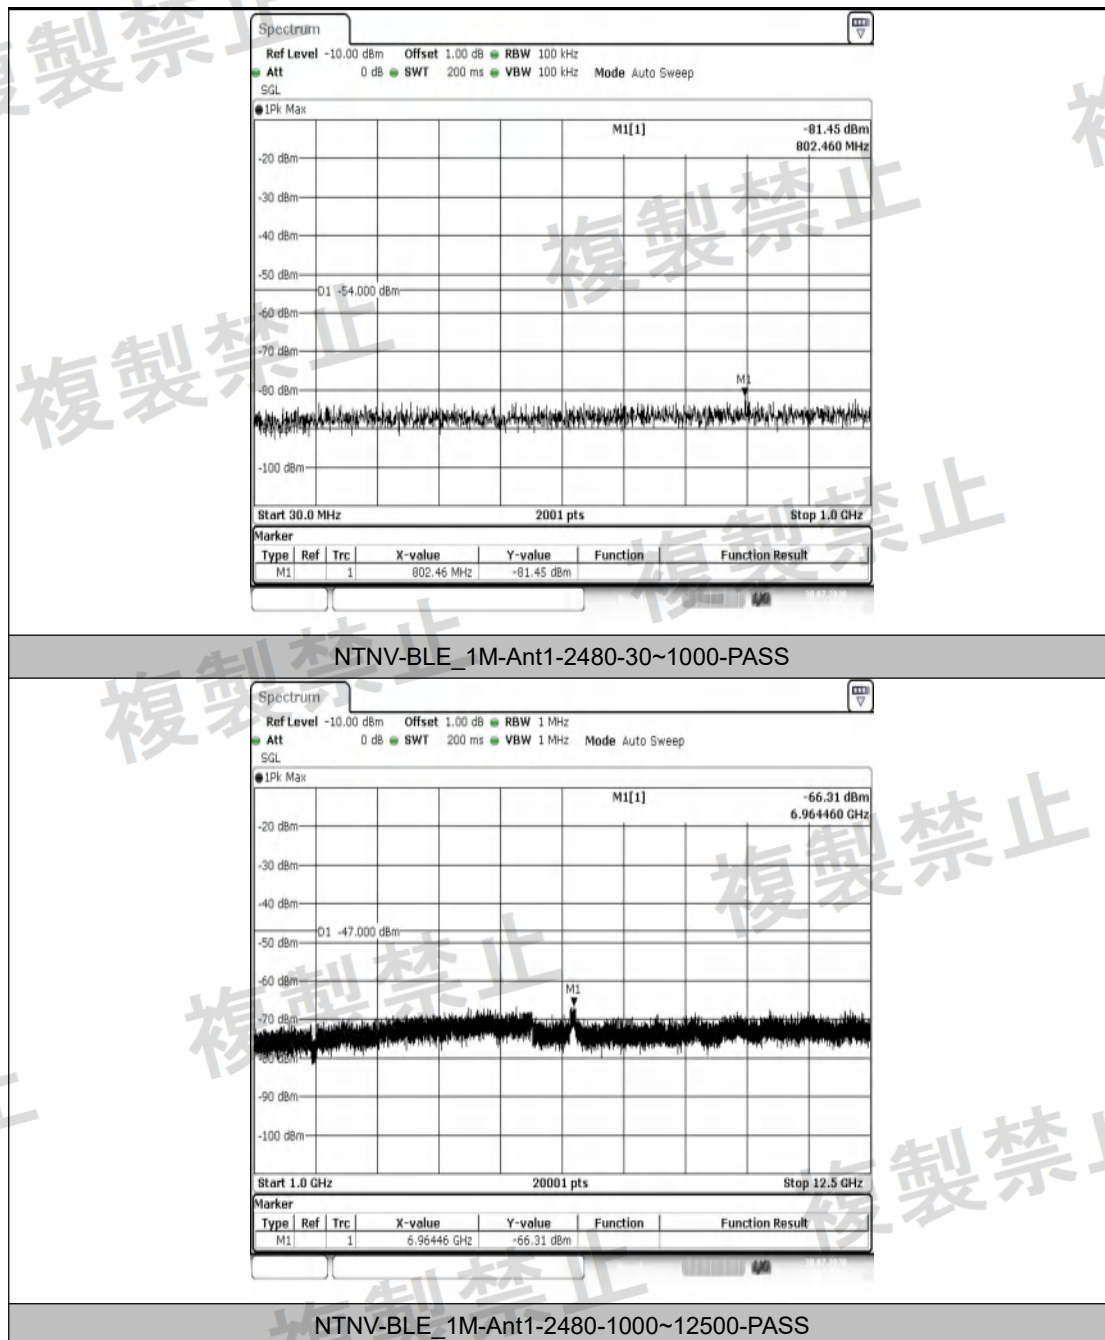

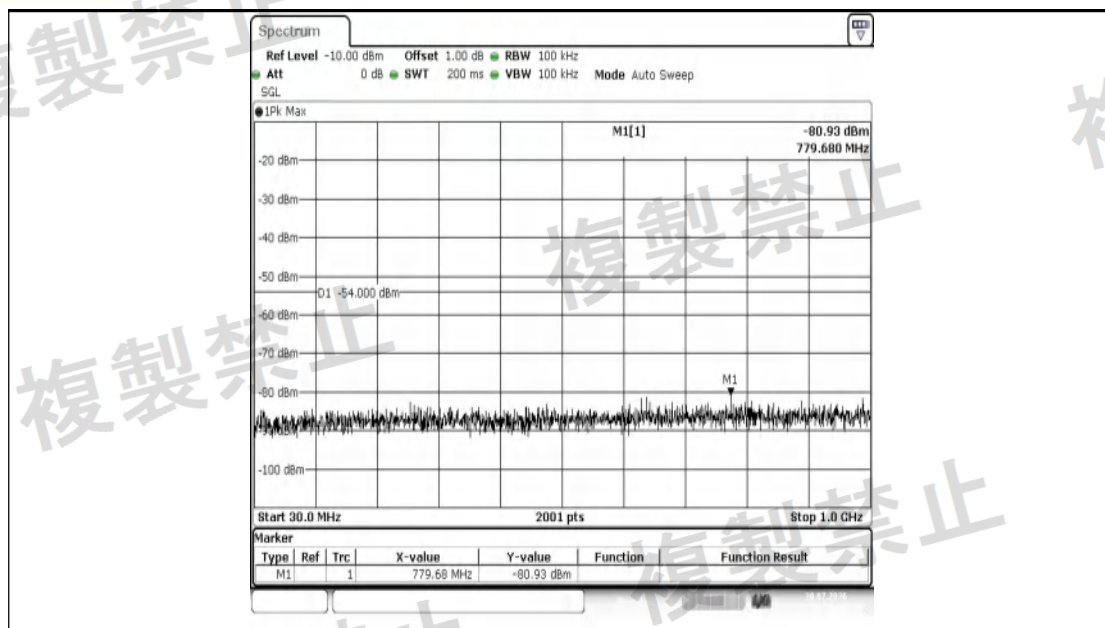



NTNV-BLE_2M-Ant1-2402-30~1000-PASS

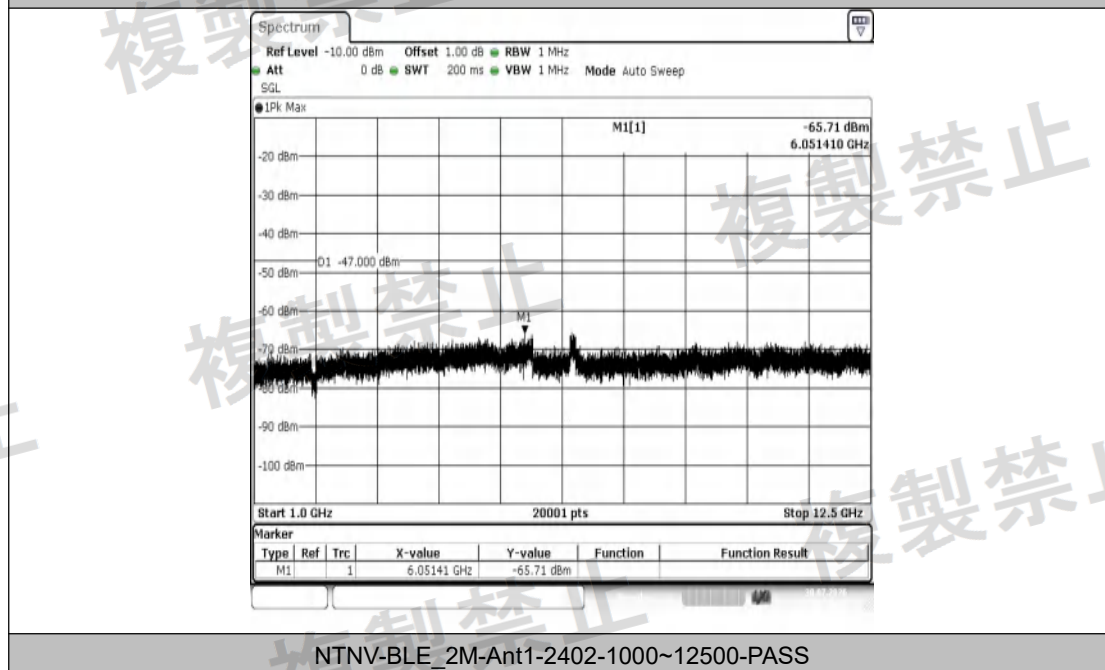

NTNV-BLE_2M-Ant1-2402-1000~12500-PASS



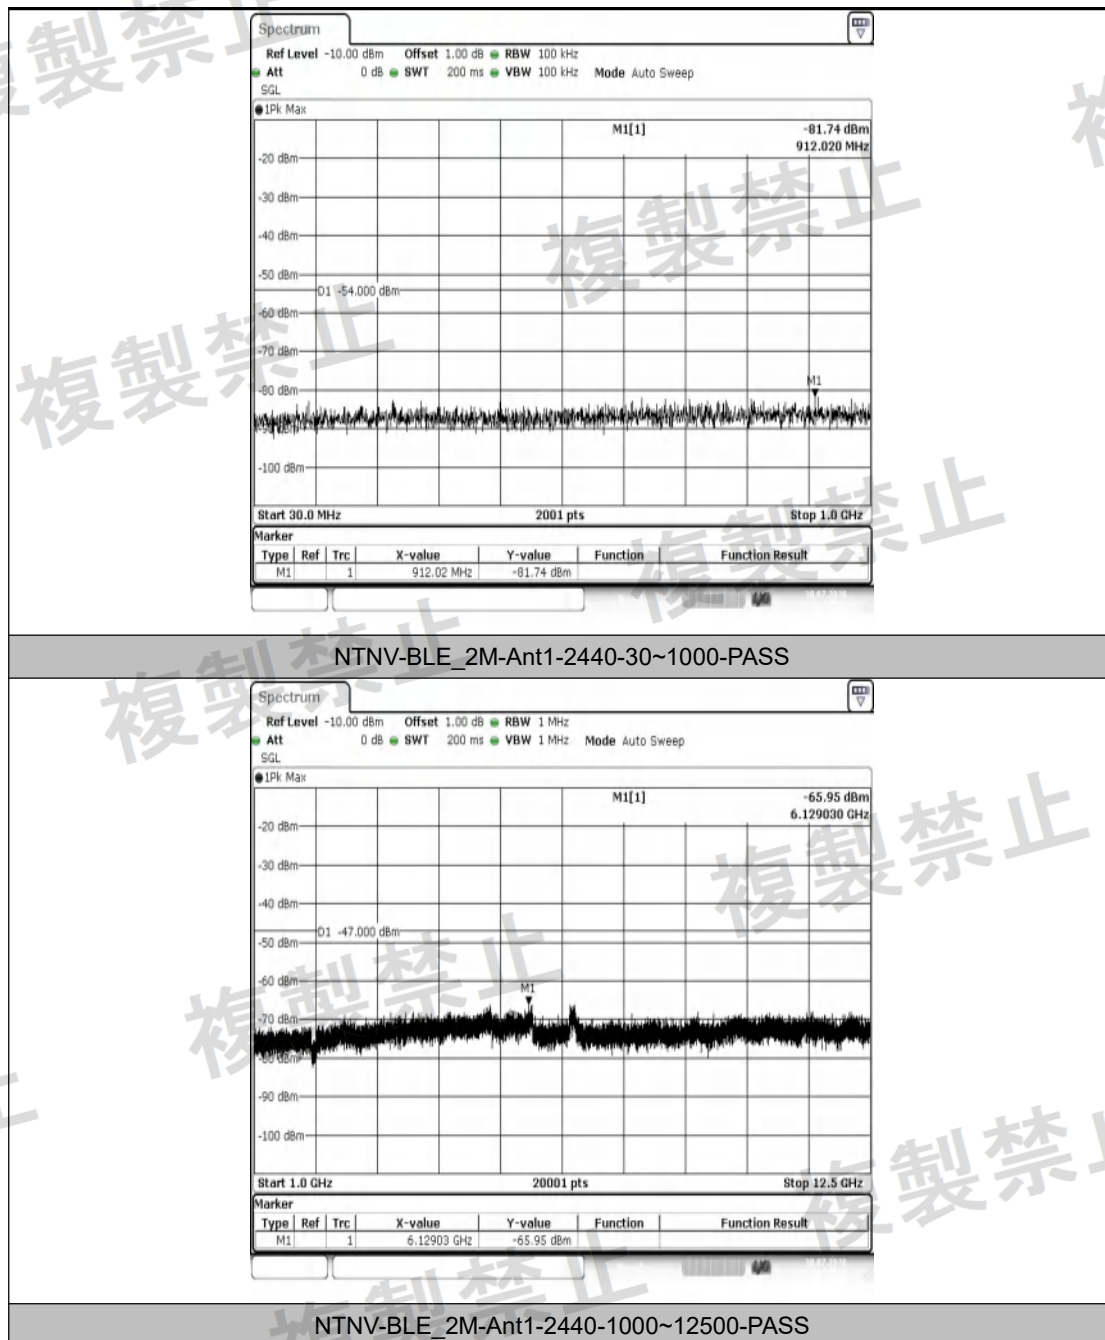

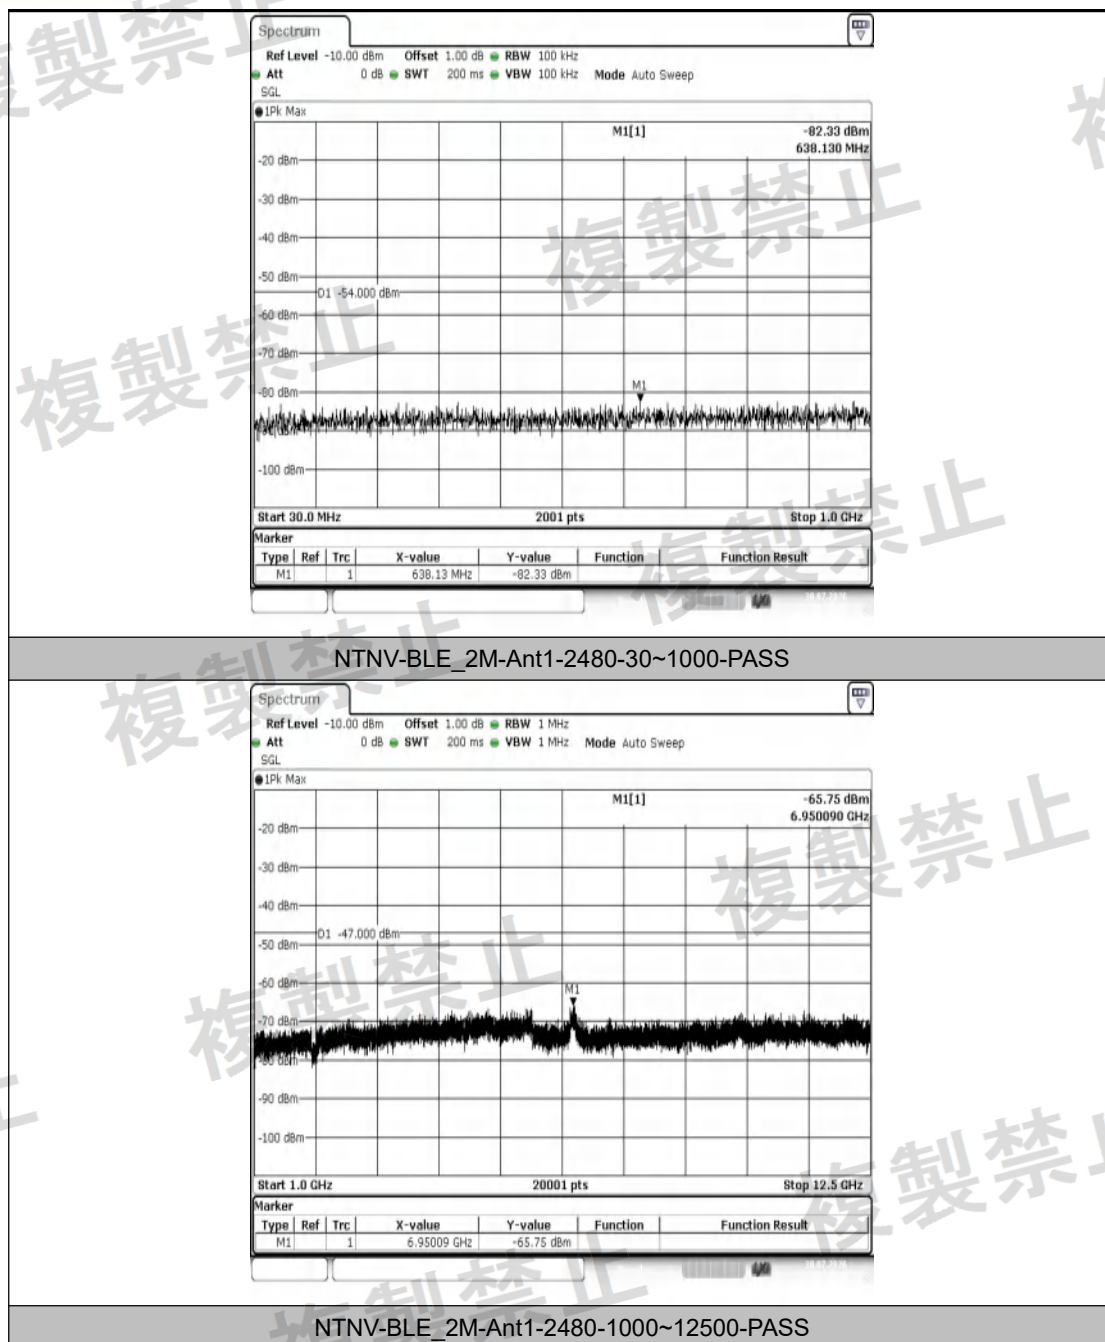


Test Result-Right


Test Condition	Test Mode	Antenna	Freq. [MHz]	Freq.Range [MHz]	Freq. [MHz]	Result [dBm/MHz]	Limit [dBm]	Result [nW]	Limit [nW]	Verdict
NTNV	BLE_1M	Ant1	2402	30~1000	712.30	-81.65	≤-54	0.00684	≤4	PASS
NTNV	BLE_1M	Ant1	2402	1000~12500	5389.04	-65.63	≤-47	0.27353	≤20	PASS
NTNV	BLE_1M	Ant1	2440	30~1000	610.98	-82.31	≤-54	0.00587	≤4	PASS
NTNV	BLE_1M	Ant1	2440	1000~12500	5999.66	-66.07	≤-47	0.24717	≤20	PASS
NTNV	BLE_1M	Ant1	2480	30~1000	621.16	-81.50	≤-54	0.00708	≤4	PASS
NTNV	BLE_1M	Ant1	2480	1000~12500	6970.21	-65.23	≤-47	0.29992	≤20	PASS
NTNV	BLE_2M	Ant1	2402	30~1000	747.20	-82.08	≤-54	0.00619	≤4	PASS
NTNV	BLE_2M	Ant1	2402	1000~12500	6994.94	-64.78	≤-47	0.33266	≤20	PASS
NTNV	BLE_2M	Ant1	2440	30~1000	609.53	-82.00	≤-54	0.00631	≤4	PASS
NTNV	BLE_2M	Ant1	2440	1000~12500	6947.79	-65.74	≤-47	0.26669	≤20	PASS
NTNV	BLE_2M	Ant1	2480	30~1000	736.05	-81.72	≤-54	0.00673	≤4	PASS
NTNV	BLE_2M	Ant1	2480	1000~12500	6917.89	-65.85	≤-47	0.26002	≤20	PASS



Test Graphs-Right

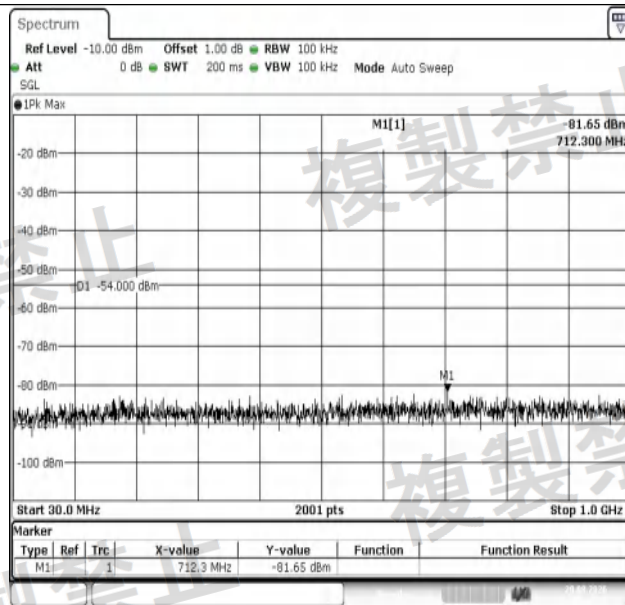



NTNV-BLE_1M-Ant1-2402-30~1000-PASS

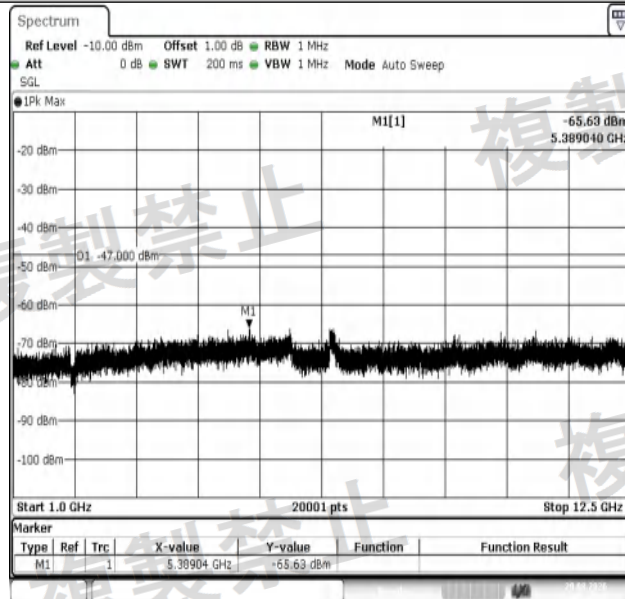



NTNV-BLE_1M-Ant1-2402-1000~12500-PASS



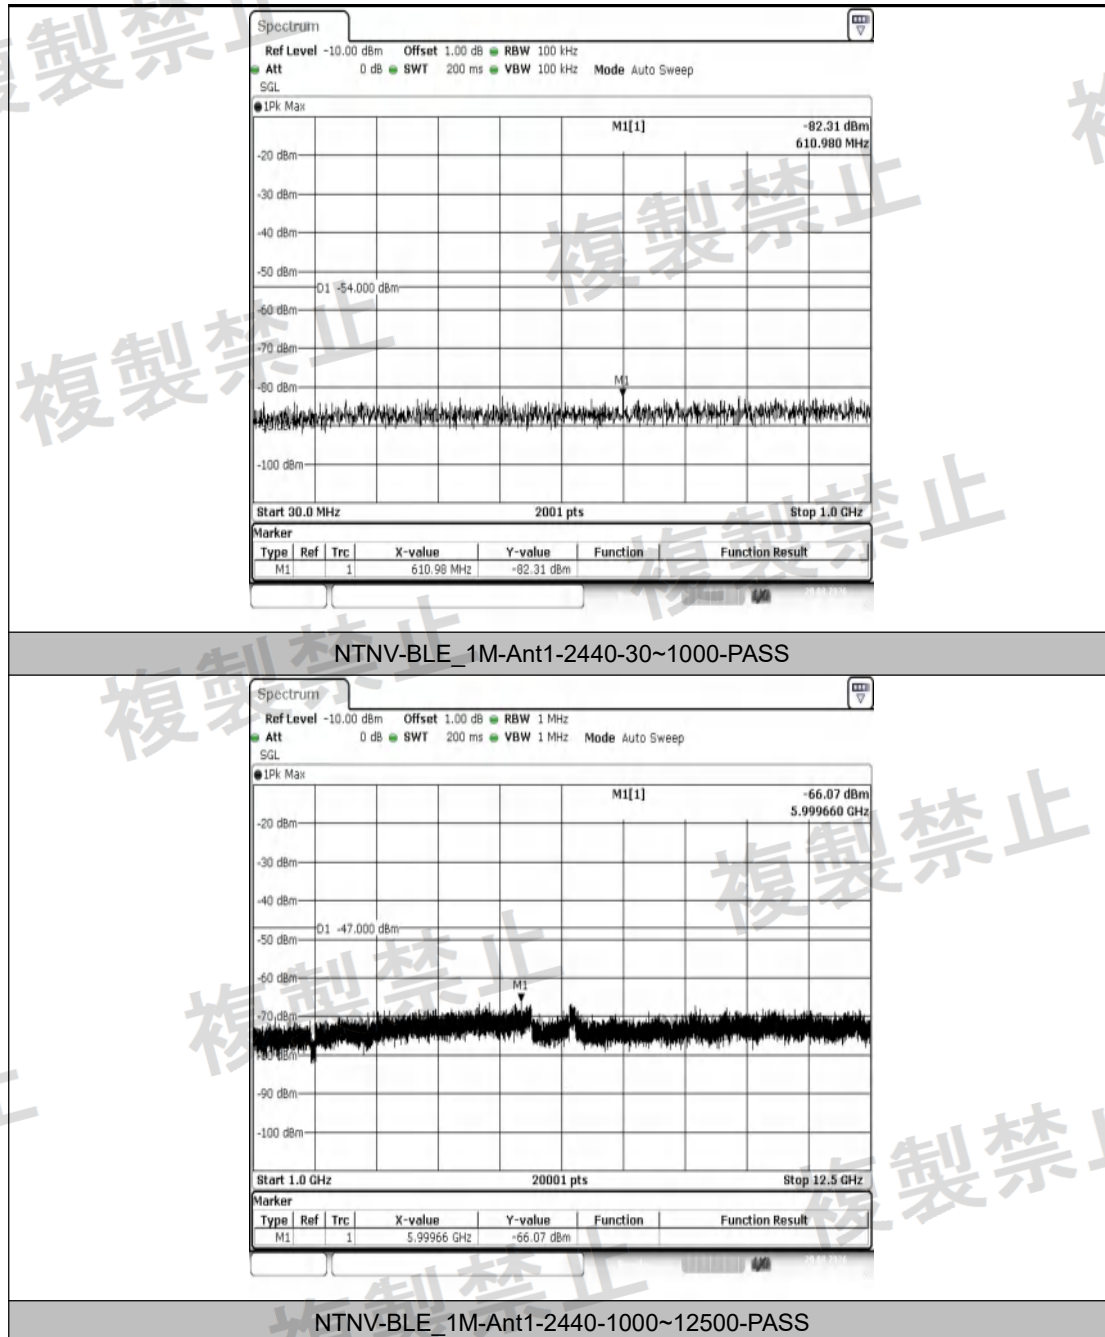


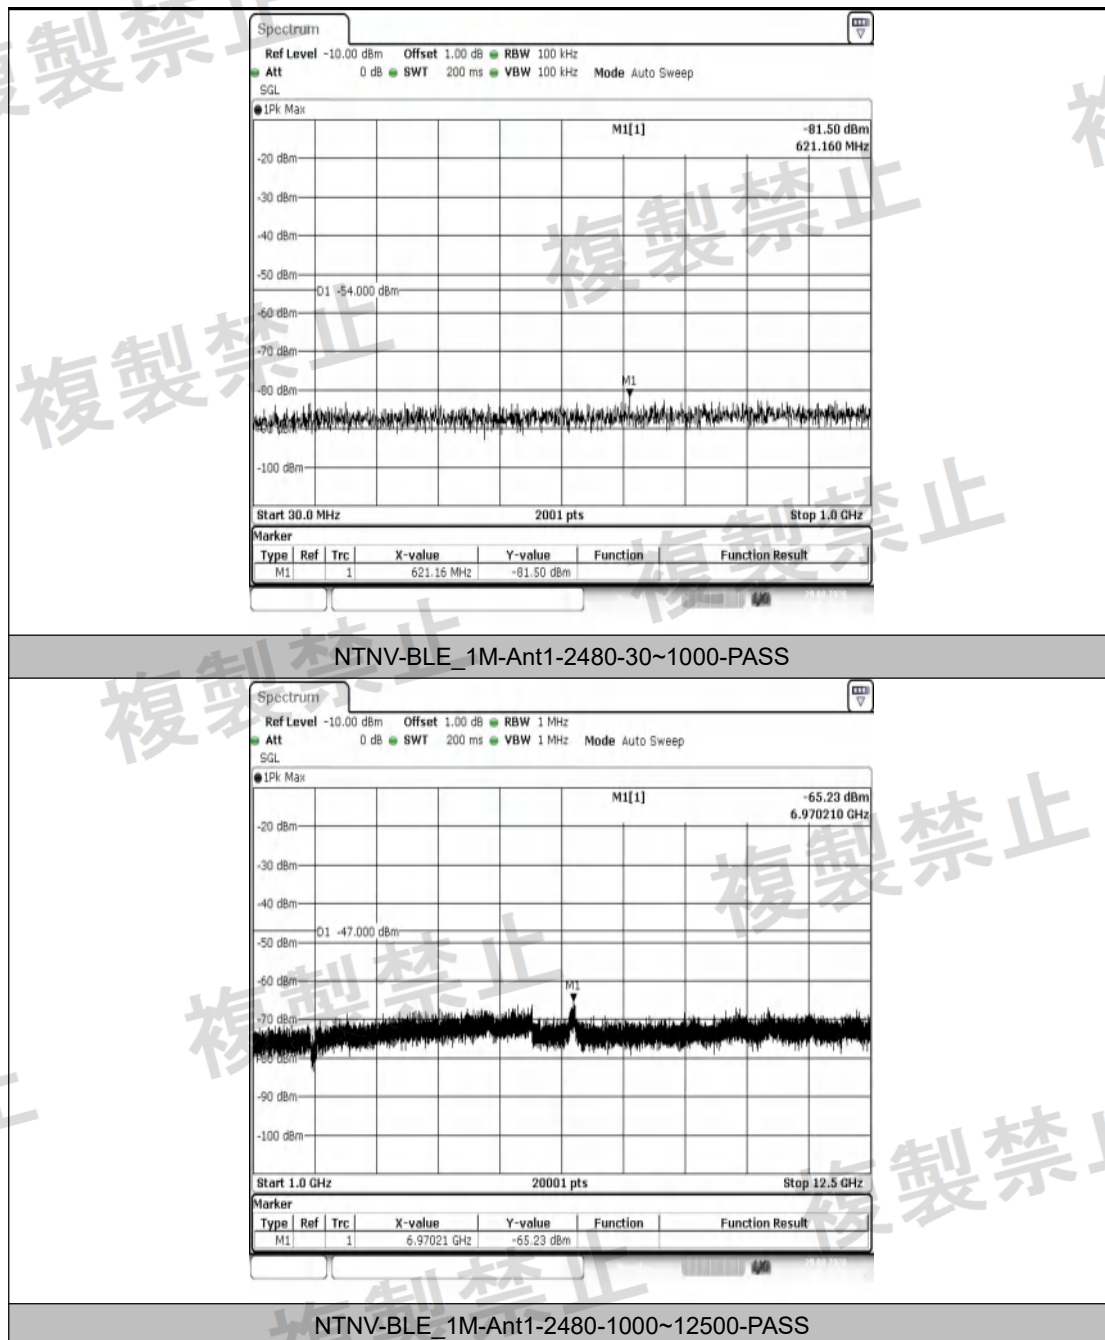

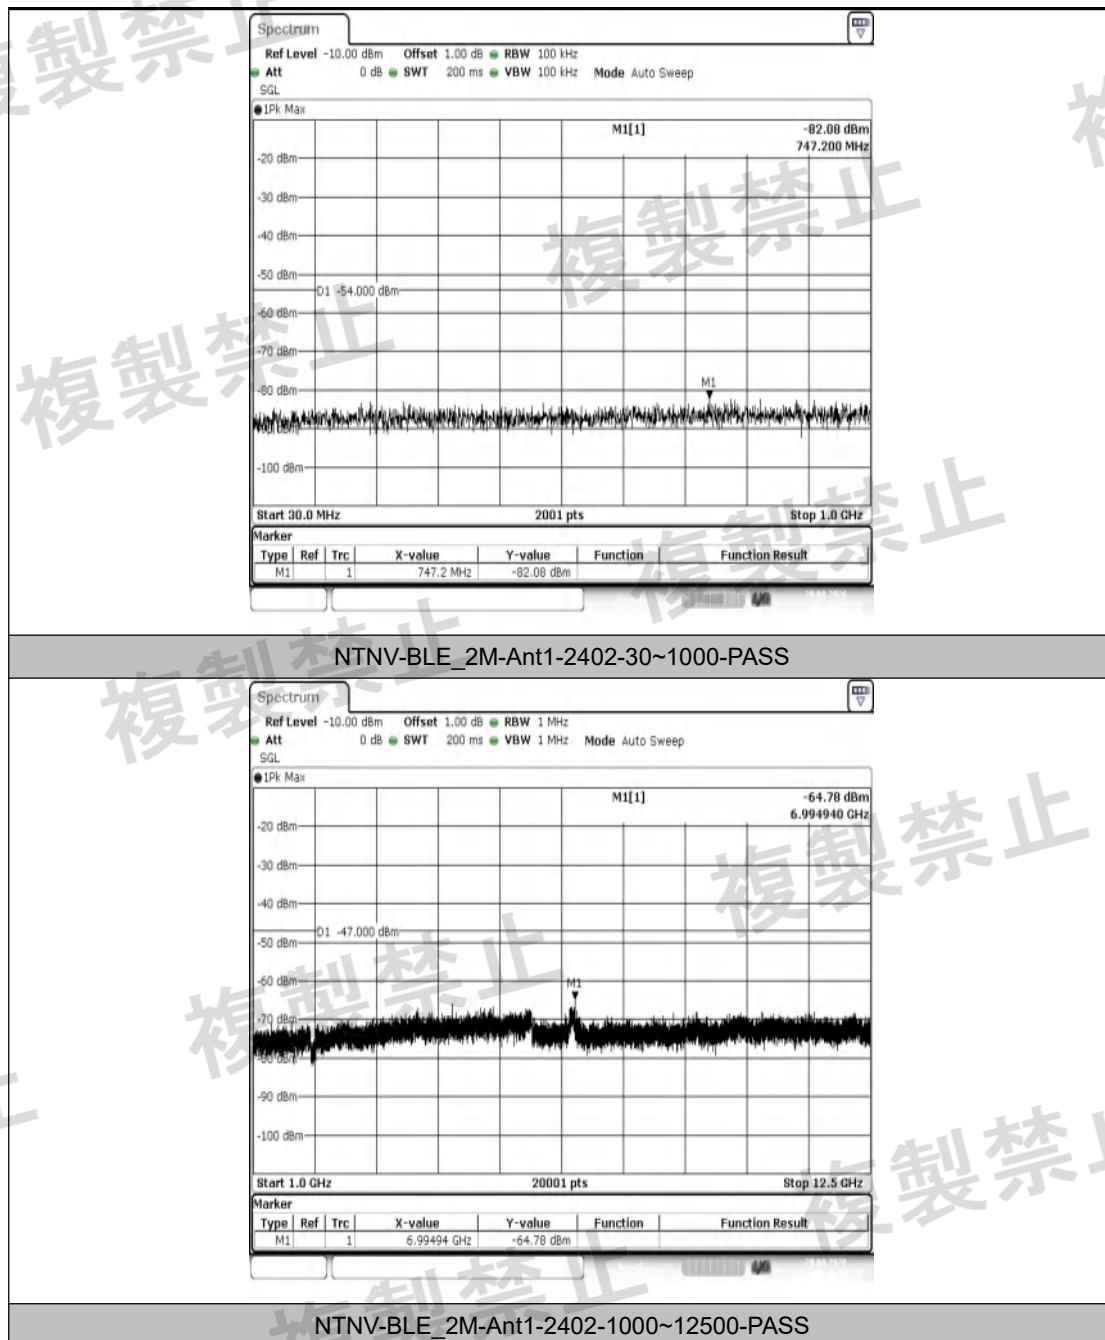

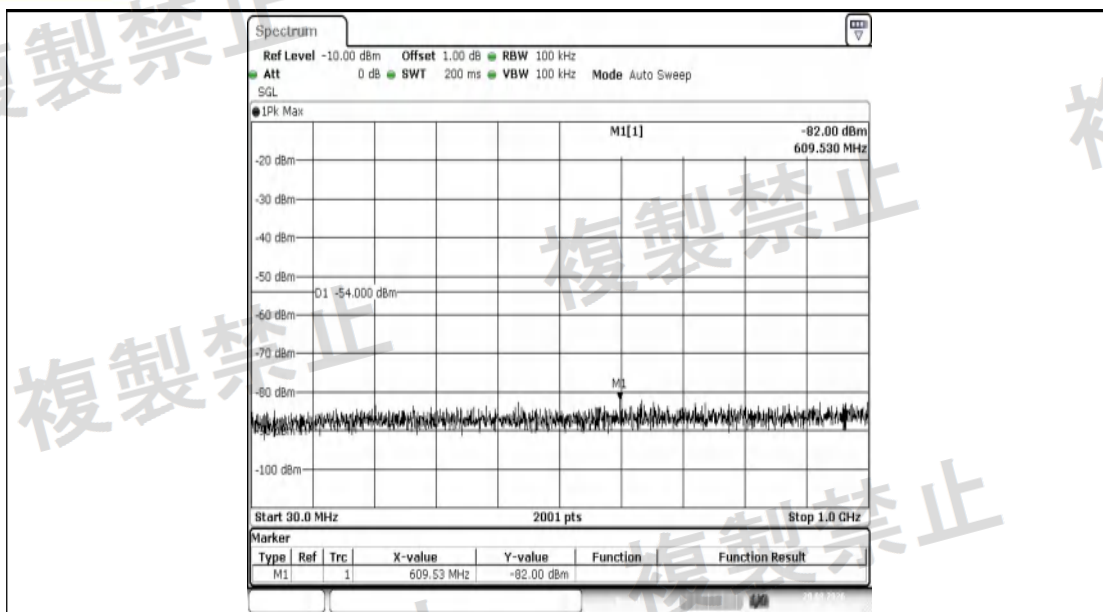


NTNV-BLE_2M-Ant1-2440-30~1000-PASS

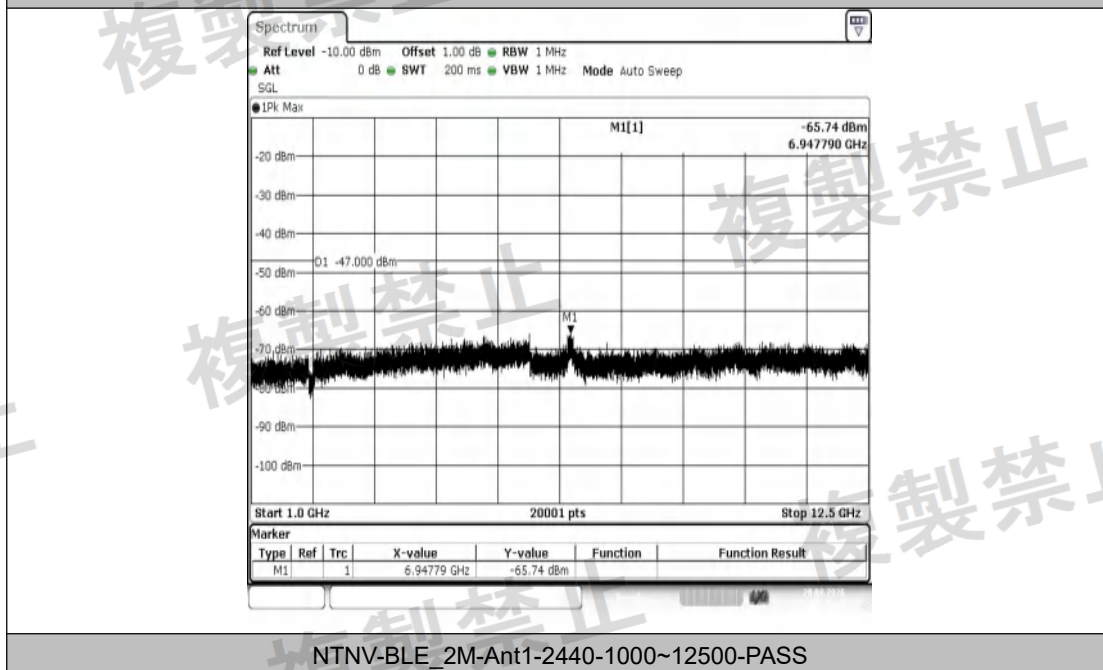

NTNV-BLE_2M-Ant1-2440-1000~12500-PASS



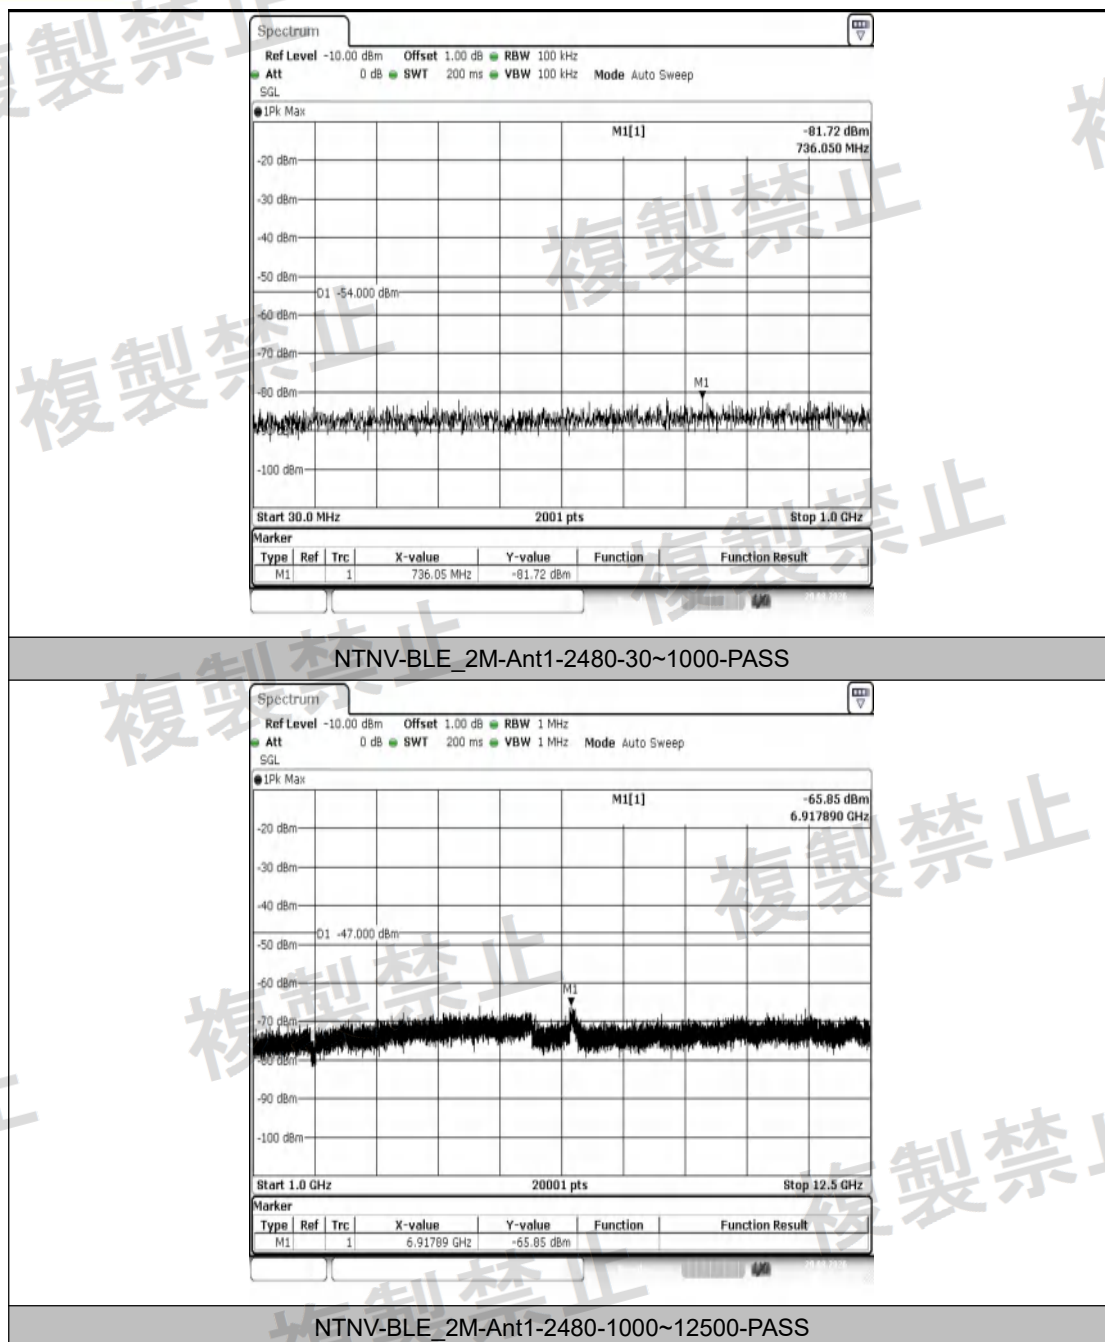

---End---

