

# TEST REPORT

Applicant Name: Anker Japan Co., Ltd.  
Address: 8F, Akasaka Trust Tower, 2-17-22 Akasaka, Minato-ku, Tokyo  
Report Number: 2601P37306E-RF-07D

## Test Standard (s)

Item 19-3 of Article 2 Paragraph 1

## Sample Description

Product Type: soundcore SpaceFlow  
Model No.: D2090  
Multiple Model(s) No.: N/A  
Trade Mark: soundcore  
Date Received: 2026-01-08  
Issue Date: 2026-03-26

|              |       |
|--------------|-------|
| Test Result: | Pass▲ |
|--------------|-------|

▲ In the configuration tested, the EUT complied with the standards above.

## Prepared and Checked By:

Ekko Wu

Ekko Wu  
RF Engineer

## Approved By:

Nancy Wang

Nancy Wang  
RF Supervisor

Note: The information marked \* is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.  
This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China  
Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

## **TABLE OF CONTENTS**

|                                                                            |            |
|----------------------------------------------------------------------------|------------|
| <b>DOCUMENT REVISION HISTORY .....</b>                                     | <b>3</b>   |
| <b>GENERAL INFORMATION .....</b>                                           | <b>4</b>   |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....                   | 4          |
| OBJECTIVE .....                                                            | 5          |
| TEST METHOD .....                                                          | 5          |
| MEASUREMENT UNCERTAINTY .....                                              | 5          |
| TEST FACILITY .....                                                        | 5          |
| <b>SYSTEM TEST CONFIGURATION .....</b>                                     | <b>6</b>   |
| <b>SUMMARY OF TEST RESULTS .....</b>                                       | <b>9</b>   |
| <b>TEST EQUIPMENT LIST .....</b>                                           | <b>10</b>  |
| <b>REQUIREMENTS AND TEST PROCEDURES .....</b>                              | <b>11</b>  |
| FREQUENCY TOLERANCE .....                                                  | 11         |
| OCCUPIED BANDWIDTH .....                                                   | 12         |
| TRANSMITTER SPURIOUS EMISSION STRENGTH AND OUT OF BAND LEAKAGE POWER ..... | 13         |
| OUTPUT POWER AND OUTPUT POWER TOLERANCE .....                              | 15         |
| ADJACENT CHANNEL POWER .....                                               | 17         |
| RECEIVER SECONDARY RADIATED EMISSION STRENGTH .....                        | 18         |
| RADIO INTERFERENCE PREVENTION CAPABILITY .....                             | 19         |
| TRANSMISSION BURST LENGTH .....                                            | 20         |
| CARRIER SENSING FUNCTION .....                                             | 21         |
| <b>TEST DATA AND RESULTS .....</b>                                         | <b>22</b>  |
| Frequency Error .....                                                      | 22         |
| Occupied Bandwidth .....                                                   | 32         |
| Transmitter Spurious Emission Strength .....                               | 52         |
| Output Power and Output Power Tolerance .....                              | 159        |
| Adjacent Channel Power .....                                               | 164        |
| Secondary Radiated Emission Strength .....                                 | 198        |
| Transmission Burst Length .....                                            | 225        |
| Radio Interference Prevention Capability .....                             | 231        |
| Carrier Sensing Function .....                                             | 232        |
| <b>CONSTRUCTION PROTECTION CONFIRMATION .....</b>                          | <b>233</b> |
| <b>EUT PHOTOGRAPHS .....</b>                                               | <b>234</b> |
| <b>TEST SETUP PHOTOGRAPHS .....</b>                                        | <b>235</b> |

DOCUMENT REVISION HISTORY

| Revision Number | Report Number      | Description of Revision | Date of Revision |
|-----------------|--------------------|-------------------------|------------------|
| 0               | 2601P37306E-RF-07D | Original Report         | 2026-03-26       |

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

|                      |                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|----------------------|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Technical Parameters | Radio Type           | Wi-Fi                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|                      | Support Technical    | 802.11a/n20/n40/ac20/ac40/ac80/ax20/ax40/ax80                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                      | Modulation Type      | OFDM, OFDMA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                      | Frequency Range      | 802.11a/n20/ac20/ax20: 5180-5240MHz, 5260-5320MHz, 5500-5720MHz<br>802.11n40/ac40/ax40: 5190-5230MHz, 5270-5310MHz, 5510-5710MHz<br>802.11ac80/ax80: 5210MHz, 5290MHz, 5530-5690MHz                                                                                                                                                                                                                                                                                                                                                                                                            |
|                      | Rated Output Power   | 5150-5250 MHz:<br>802.11a: 1.5mW/MHz<br>802.11ac20: 1.5mW/MHz<br>802.11ac40: 0.6mW/MHz<br>802.11ac80: 0.1mW/MHz<br>802.11ax20: 1.0mW/MHz<br>802.11ax40: 0.6mW/MHz<br>802.11ax80: 0.1mW/MHz<br><br>5250-5350 MHz:<br>802.11a: 1.5mW/MHz<br>802.11ac20: 1.0mW/MHz<br>802.11ac40: 0.5mW/MHz<br>802.11ac80: 0.2mW/MHz<br>802.11ax20: 0.5mW/MHz<br>802.11ax40: 0.5mW/MHz<br>802.11ax80: 0.1mW/MHz<br><br>5470-5730 MHz:<br>802.11a: 2.0mW/MHz<br>802.11ac20: 2.0mW/MHz<br>802.11ac40: 1.5mW/MHz<br>802.11ac80: 0.7mW/MHz<br>802.11ax20: 1.7mW/MHz<br>802.11ax40: 1.6mW/MHz<br>802.11ax80: 0.6mW/MHz |
|                      | Antenna Gain#        | 5150-5250MHz: ANT0: 1.96dBi, ANT1: 2.94dBi<br>5250-5350MHz: ANT0: 2.22dBi, ANT1: 3.16dBi<br>5470-5730MHz: ANT0: 4.36dBi, ANT1: 3.66dBi<br>(It is provided by the manufacturer)                                                                                                                                                                                                                                                                                                                                                                                                                 |
|                      | TPC Function         | Not support                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                      | Nominal Power Supply | 15V <sub>DC</sub> from USB Port                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                      | Sample serial number | 3FUD-2 (Assigned by BACL, Shenzhen)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Adapter Information  | Sample/EUT Status    | Good condition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|                      |                      | Model: NSA45EU-20022500<br>Input: 100-240V~50/60Hz, 1.2A<br>Output: 5.0V=3.0A/9.0V=3.0A/12.0V=3.0A/<br>15.0V=3.0A/20.0V=2.25A, 45.0W Max                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

## Objective

The objective of the manufacturer is to demonstrate compliance with Certification Ordinance Article 2-1-19-3, Radio equipment for 5G band low-power data communications system.

## Test Method

DSPP 5GHz 帯小電力データ通信システムの特性試験方法

## Measurement Uncertainty

| Item                         | Expanded Measurement uncertainty          |
|------------------------------|-------------------------------------------|
| Frequency Error              | 81.235Hz(k=1.96, 95% level of confidence) |
| Occupied Channel Bandwidth   | 52.29kHz(k=1.96, 95% level of confidence) |
| RF output power, conducted   | 1.57dB(k=1.96, 95% level of confidence)   |
| Adjacent Channel Power       | 0.715dB(k=1.96, 95% level of confidence)  |
| Unwanted Emission, conducted | 2.48dB(k=1.96, 95% level of confidence)   |
| Duty Cycle                   | ±1%                                       |
| Temperature                  | ±0.4°C                                    |
| Supply voltages              | DC±0.4%;AC±1%                             |
| Time                         | ±1%                                       |

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

Each test item follows test standards and with no deviation.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in an engineering mode which was selected by manufacturer.

For 5150-5250MHz Band, 7 channels are provided to test:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 36      | 5180            | 44      | 5220            |
| 38      | 5190            | 46      | 5230            |
| 40      | 5200            | 48      | 5240            |
| 42      | 5210            | /       | /               |

For 802.11a/ac20/ax20 mode: channel 36, 40, 48 were tested.

For 802.11ac40/ax40 mode: channel 38, 46 were tested.

For 802.11ac80/ax80 mode: channel 42 was tested.

For 5250-5350 MHz Band, 7 channels are provided to test:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 52      | 5260            | 60      | 5300            |
| 54      | 5270            | 62      | 5310            |
| 56      | 5280            | 64      | 5320            |
| 58      | 5290            | /       | /               |

For 802.11a/ac20/ax20 mode: channel 52, 56, 64 were tested.

For 802.11ac40/ax40 mode: channel 54, 62 were tested.

For 802.11ac80/ax80 mode, channel 58 was tested.

For 5470-5730MHz Band, 21 channels are provided to test:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 100     | 5500            | 124     | 5620            |
| 102     | 5510            | 126     | 5630            |
| 104     | 5520            | 128     | 5640            |
| 106     | 5530            | 132     | 5660            |
| 108     | 5540            | 134     | 5670            |
| 110     | 5550            | 136     | 5680            |
| 112     | 5560            | 138     | 5690            |
| 116     | 5580            | 140     | 5700            |
| 118     | 5590            | 142     | 5710            |
| 120     | 5600            | 144     | 5720            |
| 122     | 5610            | /       | /               |

For 802.11a/ac20/ax20 mode: channel 100, 120, 144 were tested.

For 802.11ac40/ax40 mode: channel 102, 118, 142 were tested.

For 802.11ac80/ax80 mode, channel 106, 122, 138 were tested.

| Normal/Extreme Voltage Condition <sup>#</sup>                                                                                                                                              |                          |                                      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|--------------------------------------|
| NV                                                                                                                                                                                         | Normal Voltage           | 15.0                                 |
| LV                                                                                                                                                                                         | Low Voltage              | 13.5                                 |
| HV                                                                                                                                                                                         | High Voltage             | 16.5                                 |
| <i>Note: extreme voltage test conditions were declared by manufacturer.</i>                                                                                                                |                          |                                      |
| The EUT powered by USB port, power deviation of the RF circuit is less than 1% when extreme voltage supplied, therefore the test only performed at normal condition. Details as following: |                          |                                      |
| Voltage Condition                                                                                                                                                                          | Input (V <sub>DC</sub> ) | RF System Voltage (V <sub>DC</sub> ) |
| NV                                                                                                                                                                                         | 15.0                     | 3.3                                  |
| LV                                                                                                                                                                                         | 13.5                     | 3.3                                  |
| HV                                                                                                                                                                                         | 16.5                     | 3.3                                  |

### EUT Exercise Software

| Exercise Software <sup>#</sup> |           | WQ emu                   |          |          |
|--------------------------------|-----------|--------------------------|----------|----------|
| Mode                           | Data rate | Power Level <sup>#</sup> |          |          |
|                                |           | W52 Band                 | W53 Band | W56 Band |
| 802.11a                        | 6Mbps     | 14                       | 13       | 12       |
| 802.11ac20                     | MCS0      | 15                       | 15       | 15       |
| 802.11ac40                     | MCS0      | 14                       | 14       | 15       |
| 802.11ac80                     | MCS0      | 9                        | 9        | 15       |
| 802.11ax20                     | MCS0      | 10                       | 9        | 14       |
| 802.11ax40                     | MCS0      | 10                       | 11       | 16       |
| 802.11ax80                     | MCS0      | 4                        | 8        | 15       |

Note:

1. The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the power across all data rates bandwidths, and modulations.
2. The device supports SISO in all modes, and MIMO 2T2R in 802.11n/ac/ax modes, per pretest, 2T2R mode was the worst mode and reported for 802.11n/ac/ax modes.
3. The n20/n40 mode was reduced test as identical parameter with ac20/ac40 mode.
4. For 802.11ax modes, the device not support partial RU mode.
5. All the antenna ports have the same power level.

### Equipment Modifications


No modification was made to the EUT tested.

### Support Equipment List and Details

| Manufacturer | Description         | Model           | Serial Number |
|--------------|---------------------|-----------------|---------------|
| Grandstream  | Router              | GWN7665         | C074AD251F0A  |
| DELL         | PC                  | DESKTOP-1630AQ3 | Unknown       |
| Unknown      | Serial port board*2 | Unknown         | Unknown       |

**External I/O Cable**

| Cable Description                  | Length(m) | From/Port         | To                |
|------------------------------------|-----------|-------------------|-------------------|
| Unshielded detachable Dupont cable | 0.8       | Serial port board | Serial port board |
| Unshielded detachable DC cable     | 1.5       | Adapter           | Serial port board |

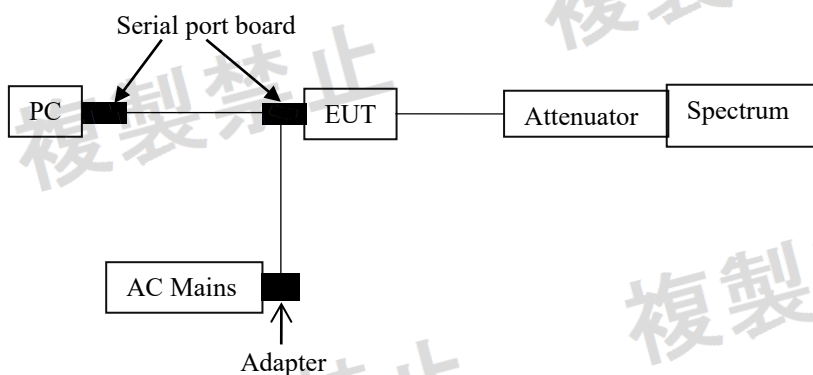**Configuration of Test Setup**

**SUMMARY OF TEST RESULTS**

| DSPP 5GHz 帯小電力データ通信システムの特性試験方法<br>Article 2, Paragraph 1, Item 19-3 | Description Of Test                                               | Result         |
|---------------------------------------------------------------------|-------------------------------------------------------------------|----------------|
| 1                                                                   | Frequency Tolerance                                               | Compliant      |
| 2                                                                   | Occupied Bandwidth                                                | Compliant      |
| 3                                                                   | Transmitter Spurious Emission Strength and out-Band Leakage Power | Compliant      |
| 4                                                                   | Output Power and Output Power Tolerance                           | Compliant      |
| 5                                                                   | Adjacent Channel Power                                            | Compliant      |
| 6                                                                   | Secondary Radiated Emission Strength                              | Compliant      |
| 7                                                                   | Radio Interference Prevention Capability                          | Compliant      |
| 8                                                                   | Transmission Burst Length                                         | Compliant      |
| 9                                                                   | Carrier Sense Function                                            | Compliant      |
| 10                                                                  | Transmission Power Control Function (TPC)                         | Not Applicable |
| 11                                                                  | DFS Function                                                      | Compliant*     |
| 12                                                                  | Construction Protection Confirmation                              | Compliant      |

Not Applicable: the EUT has no TPC function which was declared by the applicant.

Compliant\*: Please refer to the DFS report 2601P37306E-RF-07E.

**TEST EQUIPMENT LIST**

| Manufacturer    | Description                         | Model      | Serial Number | Calibration Date | Calibration Due Date | Calibration Authority | Calibration Method |
|-----------------|-------------------------------------|------------|---------------|------------------|----------------------|-----------------------|--------------------|
| Rohde & Schwarz | Spectrum Analyzer                   | FSV40-N    | 102259        | 2025/09/01       | 2026/08/31           | CCIC                  | c)                 |
| ANRITSU         | Microwave peak power sensor         | MA24418A   | 12622         | 2025/09/01       | 2026/08/31           | CCIC                  | c)                 |
| Rohde & Schwarz | Wideband Radio Communication Tester | CMW500     | 146520        | 2025/09/18       | 2026/09/17           | CCIC                  | c)                 |
| Keysight        | MXG Vector Signal Generator         | N5182B     | MY53051503    | 2025/09/18       | 2026/09/17           | CCIC                  | c)                 |
| instek          | DC Power Supply                     | GPS-3030DD | EM832096      | NCR              | NCR                  | /                     | /                  |
| Fluke           | Digital Multimeter                  | 287        | 19000011      | 2025/04/29       | 2026/04/28           | BACL Cal              | c)                 |
| Unknown         | RF Cable                            | Cable RF2  | Cable RF2     | 2025/09/17       | 2026/09/16           | BACL Cal              | c)                 |
| Unknown         | 10dB Attenuator                     | Unknown    | F-03-EM190    | 2025/06/26       | 2026/06/25           | BACL SZ               | d)                 |
| Unknown         | Power Splitter                      | PD2        | 2000-600      | 2025/06/26       | 2026/06/25           | BACL SZ               | d)                 |

Note: Calibration Method

a) Calibration conducted by the National Institute of Information and Communications Technology (NICT) or a designated calibration agency under Article 102-18 paragraph (1)

b) Correction conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Law (Law No. 51 of 1992) ~Japan Calibration Service System~

c) Calibration conducted in foreign countries, which shall be equivalent to the calibration conducted by the NICT or a designated calibration agency under Article 102-18 paragraph (1)

d) Calibration conducted by using other equipment that listed above from a) to c)

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## REQUIREMENTS AND TEST PROCEDURES

### Frequency Tolerance


#### Limit

| Item                | Limits             |
|---------------------|--------------------|
| Frequency Tolerance | $\pm 20\text{ppm}$ |

#### Test Procedure

Set the EUT to the measurement frequency with modulation.  
Setting of SA is following as:

- Center Frequency: Frequency to measure
- RBW: 1 kHz, VBW: 3 kHz
- Span: Wide enough to capture bandwidth.
- Sweep time: Auto
- Log scale: 10dB/Div, Data points: 400 points or more
- Reference level: Enough level for maximum dynamic range
- Detection: Positive Peak
- Sweep mode: Continuous sweep
- Marker: Spot

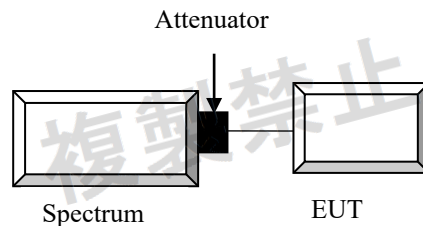


**Occupied Bandwidth****Limit**

| Item                | Limits                                     |
|---------------------|--------------------------------------------|
| Occupied Bandwidth: | $\leq 18\text{MHz}$ (20MHz Mode DSSS,etc.) |
|                     | $\leq 20\text{MHz}$ (20MHz Mode OFDM)      |
|                     | $\leq 40\text{MHz}$ (40MHz Mode OFDM)      |
|                     | $\leq 80\text{MHz}$ (80MHz Mode OFDM)      |

**Test Procedure**

1. Setting of SA is following as: RB: 300 kHz / VB: 300 kHz / SPAN: two time nominal bandwidth / Sweep time: Auto or more / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold
2. EUT have transmitted the maximum modulation signal and fixed channelize. SA set to 99% of occupied bandwidth to measure occupied bandwidth.

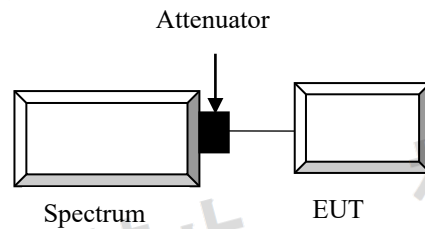

## Transmitter Spurious Emission Strength and Out Of Band Leakage Power

### Limit

| W52                                                  |                                                      |                                                                |                                                                |
|------------------------------------------------------|------------------------------------------------------|----------------------------------------------------------------|----------------------------------------------------------------|
| 20MHz system                                         |                                                      | 40MHz system                                                   | 80MHz system                                                   |
| OBW : 18MHz or less                                  | OBW : 18 - 20 MHz                                    |                                                                |                                                                |
| 5,142 MHz or less : 2.5 $\mu$ W/MHz                  | 5,142 MHz or less : 2.5 $\mu$ W/MHz                  | 5,141.6 MHz or less : 2.5 $\mu$ W/MHz                          | 5,123.2 MHz or less : 2.5 $\mu$ W/MHz                          |
| 5,142 - 5,150 MHz : 15 $\mu$ W/MHz                   | 5,142 - 5,150 MHz : 15 $\mu$ W/MHz                   | 5,141.6 - 5,150 MHz : 15 $\mu$ W/MHz                           | 5,123.2 - 5,150 MHz : 15 $\mu$ W/MHz                           |
| 5,250 - 5,250.2 MHz : $10^{1-(f-5250)/10}$ mW/MHz    | 5,250 - 5,250.2 MHz : $10^{1-(f-5250)/10}$ mW/MHz    | 5,250 - 5,251 MHz : $10^{-(f-5250)+\log(1/2)}$ mW/MHz          | 5,250 - 5,251 MHz : $10^{-(f-40)+\log(1/4)}$ mW/MHz            |
| 5,251 - 5,260 MHz : $10^{-1-(f-5250)/10}$ mW/MHz     | 5,251 - 5,260 MHz : $10^{-1-(f-5250)/10}$ mW/MHz     | 5,251 - 5,270 MHz : $10^{-(f-5250)/10-1+\log(1/2)}$ mW/MHz     | 5,251 - 5,290 MHz : $10^{-(f-5250)/10-1+\log(1/4)}$ mW/MHz     |
| 5,260 - 5,266.7 MHz : $10^{-1.8-(f-5260)/10}$ mW/MHz | 5,260 - 5,266.7 MHz : $10^{-1.8-(f-5260)/10}$ mW/MHz | 5,270 - 5,278.4 MHz : $10^{-(f-5270)/10-1.8+\log(1/2)}$ mW/MHz | 5,290 - 5,296.7 MHz : $10^{-(f-5290)/10-1.8+\log(1/4)}$ mW/MHz |
| 5,266.7 MHz or more : 2.5 $\mu$ W/MHz                | 5,266.7 MHz or more : 2.5 $\mu$ W/MHz                | 5,278.4 MHz or more : 2.5 $\mu$ W/MHz                          | 5,296.7 MHz or more : 2.5 $\mu$ W/MHz                          |
| f = MHz, Difference from 5240 (MHz)                  | f = MHz, Difference from 5240 (MHz)                  | f = MHz, Difference from 5230 (MHz)                            | f = MHz, Difference from 5210 (MHz)                            |

| W53                                                  |                                                      |                                                                |                                                                |
|------------------------------------------------------|------------------------------------------------------|----------------------------------------------------------------|----------------------------------------------------------------|
| 20MHz system                                         |                                                      | 40MHz system                                                   | 80MHz system                                                   |
| OBW : 18MHz or less                                  | OBW : 18 - 20 MHz                                    |                                                                |                                                                |
| 5,233.3 MHz or less : 2.5 $\mu$ W/MHz                | 5,233.3 MHz or less : 2.5 $\mu$ W/MHz                | 5,221.6 MHz or less : 2.5 $\mu$ W/MHz                          | 5,203.3 MHz or less : 2.5 $\mu$ W/MHz                          |
| 5,233.3 - 5,240 MHz : $10^{-1.8-(f-5230)/10}$ mW/MHz | 5,233.3 - 5,240 MHz : $10^{-1.8-(f-5230)/10}$ mW/MHz | 5,221.6 - 5,230 MHz : $10^{-(f-5230)/10-1.8+\log(1/2)}$ mW/MHz | 5,203.3 - 5,210 MHz : $10^{-(f-5200)/10-1.8+\log(1/4)}$ mW/MHz |
| 5,240 - 5,249 MHz : $10^{-1-(f-5240)/10}$ mW/MHz     | 5,240 - 5,249 MHz : $10^{-1-(f-5240)/10}$ mW/MHz     | 5,230 - 5,249 MHz : $10^{-(f-5230)/10-1+\log(1/2)}$ mW/MHz     | 5,210 - 5,249 MHz : $10^{-(f-5210)/10-1+\log(1/4)}$ mW/MHz     |
| 5,249 - 5,250 MHz : $10^{1-(f-5249)/10}$ mW/MHz      | 5,249 - 5,249.8 MHz : $10^{1-(f-5249)/10}$ mW/MHz    | 5,249 - 5,250 MHz : $10^{-(f-5249)/10+\log(1/2)}$ mW/MHz       | 5,249 - 5,250 MHz : $10^{-(f-40)+\log(1/4)}$ mW/MHz            |
| 5,350 MHz or more : 2.5 $\mu$ W/MHz                  | 5,249.8 - 5,250 MHz : $10^{1-(f-5249)/10}$ mW/MHz    | 5,350 - 5,358.4 MHz : 15 $\mu$ W/MHz                           | 5,350 - 5,376.8 MHz : 15 $\mu$ W/MHz                           |
| f = MHz, Difference from 5260 (MHz)                  | f = MHz, Difference from 5260 (MHz)                  | f = MHz, Difference from 5270 (MHz)                            | f = MHz, Difference from 5290 (MHz)                            |


  

| W56                                  |                                      |                                      |                                        |
|--------------------------------------|--------------------------------------|--------------------------------------|----------------------------------------|
| 20MHz system                         |                                      | 40MHz system                         | 80MHz system                           |
| DSSS, etc.                           | OFDM                                 |                                      |                                        |
| 5,470 MHz or less : 12.5 $\mu$ W/MHz | 5,460 MHz or less : 2.5 $\mu$ W/MHz  | 5,460 MHz or less : 12.5 $\mu$ W/MHz | 5,460 MHz or less : 12.5 $\mu$ W/MHz   |
|                                      | 5,460 - 5,470 MHz : 12.5 $\mu$ W/MHz | 5,460 - 5,470 MHz : 50 $\mu$ W/MHz   | 5,460 - 5,469.5 MHz : 50 $\mu$ W/MHz   |
| 5,730 MHz or more : 12.5 $\mu$ W/MHz | 5,745 - 5,765 MHz : 12.5 $\mu$ W/MHz | 5,770 MHz or more : 12.5 $\mu$ W/MHz | 5,469.5 - 5,470 MHz : 51.2 $\mu$ W/MHz |
|                                      | Over 5,765 MHz : 2.5 $\mu$ W/MHz     |                                      | 5,770 MHz or more : 12.5 $\mu$ W/MHz   |


### Test Procedure

#### Measurement System Diagram

SISO:

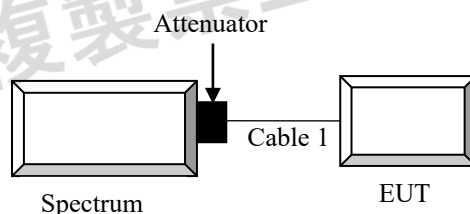

MIMO:

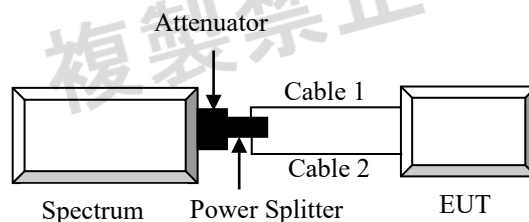

Note : The worst cable loss among the test frequency range was added into plots.

## Conditions of Application Equipment (EUT)

- The modulation state shall be “continuous transmitting mode” by spread spectrum.

## Spectrum Analyzer Conditions:

- Span: Measuring Frequency Range
- RBW: 100kHz(Below 1GHz)/1MHz(Above 1GHz)
- VBW: Same as RBW
- Sweep time: Auto or more (Minimum time to ensure measurement accuracy.)
- Data points : 400 points or more
- Reference level: Enough level for maximum dynamic range
- Detection: Positive Peak

If the measured value is under the technical standard value, do not need to measure more detail.

## Output Power and Output Power Tolerance

### Limit

For 5.2 GHz Band:

| Item                    | Limits                 |         |           |
|-------------------------|------------------------|---------|-----------|
|                         | 20MHz                  | 40MHz   | 80MHz     |
| Antenna Power           | 10mW/MHz               | 5mW/MHz | 2.5mW/MHz |
| E.I.R.P.                | 10mW/MHz               | 5mW/MHz | 2.5mW/MHz |
| Antenna Power Tolerance | $\leq +20\%$ , $-80\%$ |         |           |

For 5.3 GHz Band:

| Item                    | Limits                            |                                     |                                      |
|-------------------------|-----------------------------------|-------------------------------------|--------------------------------------|
|                         | 20MHz                             | 40MHz                               | 80MHz                                |
| Antenna Power           | 10mW/MHz                          | 5mW/MHz                             | 2.5mW/MHz                            |
| E.I.R.P.                | 10mW/MHz<br>(with TPC function)   | 5mW/MHz<br>(with TPC function)      | 2.5mW/MHz<br>(with TPC function)     |
|                         | 5mW/MHz<br>(without TPC function) | 2.5mW/MHz<br>(without TPC function) | 1.25mW/MHz<br>(without TPC function) |
| Antenna Power Tolerance | $\leq +20\%$ , $-80\%$            |                                     |                                      |

For 5.6 GHz Band:


| Item                    | Limits                             |                                      |                                      |
|-------------------------|------------------------------------|--------------------------------------|--------------------------------------|
|                         | 20MHz                              | 40MHz                                | 80MHz                                |
| Antenna Power           | 10mW/MHz                           | 5mW/MHz                              | 2.5mW/MHz                            |
| E.I.R.P.                | 50mW/MHz<br>(with TPC function)    | 25mW/MHz<br>(with TPC function)      | 12.5mW/MHz<br>(with TPC function)    |
|                         | 25mW/MHz<br>(without TPC function) | 12.5mW/MHz<br>(without TPC function) | 6.25mW/MHz<br>(without TPC function) |
| Antenna Power Tolerance | $\leq +50\%$ , $-50\%$             |                                      |                                      |

### Test Procedure

1. Set the UUT as transmitting the modulation signal.
2. The settings of the spectrum analyzer when providing frequency search for the maximum power should be set as follows:
  - Center Frequency: The center frequency of the channel under test
  - Span: Approximately 2 times of the occupied frequency bandwidth.
  - RBW: 1 MHz
  - VBW: same as RBW
  - Sweep time: Minimum time that ensures measurement accuracy (For burst waves, the time should be long enough to include at least one burst per sample)

- Trigger Condition: Free run
  - Sweep Mode: Continuous Sweep
  - Detector: Positive Peak
  - Trace Mode: Max Hold
3. The settings of the spectrum analyzer when measuring power shall be as follows:
- Center Frequency: Searched frequency for the maximum power in step 2.
  - Span: 0 Hz
  - RBW: 1MHz
  - VBW: Same as RBW
  - Sweep Mode: Continuous.
4. Measurement of antenna power via power meter
- (1) For Systems using OFDM or Direct Sequence Spread Spectrum (DSSS):
- a. Set the spectrum analyzer as step 2 to search for the frequency providing maximum antenna power.
  - b. Sweep repeatedly until no further changes are observed on the display, then measure the frequency that yields the maximum power per 1 MHz.
  - c. If the radio equipment uses two carrier frequencies simultaneously, measure the frequency that gives the maximum power per MHz for each of the carrier frequencies.
  - d. Then set the spectrum analyzer as step 3 to measure the antenna power at that frequency.
  - e. Connect a power meter to the IF output port of the spectrum analyzer.
  - f. The antenna power is defined as:
    - For continuous wave: value corrected as spread bandwidth to calculate the average power per 1MHz.
    - For burst wave: the adjusted reading from the corrected value (as in continuous wave) and the duty cycle, representing the average power within the burst.
  - g. For OFDM systems with multiple subcarrier modulation schemes:
    - Measure the antenna power for each modulation type and select the highest value as the final result.
  - h. If the radio equipment uses two carrier frequencies simultaneously, measure the antenna power for each carrier frequency.
  - i. If there are multiple antenna terminals, perform measurements at each antenna terminal.
- (2) For other systems:
- a. Connect a power meter and measure the total power.
  - b. The antenna power is defined as:
    - For continuous wave: the value from step a above.
    - For burst wave: the adjusted reading from the corrected value (as in continuous wave) and the duty cycle, representing the average power within the burst.

#### Test Setup Block diagram

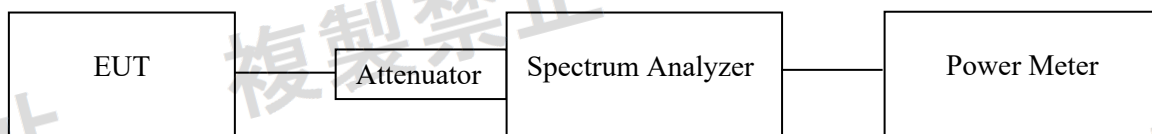

## Adjacent Channel Power

### Limit


| Bandwidth System | Occupied Bandwidth  | Sweep Bandwidth | Adjacent Channel                | Limits |
|------------------|---------------------|-----------------|---------------------------------|--------|
| 20MHz System     | OBW < 18MHz         | 18MHz (±9MHz)   | Adjacent Channel: ±20MHz        | ≥25dB  |
|                  |                     |                 | Second Adjacent Channel: ±40MHz | ≥40dB  |
|                  | 18MHz < OBW < 20MHz | 20MHz (±10MHz)  | Adjacent Channel: ±20MHz        | ≥25dB  |
|                  |                     |                 | Second Adjacent Channel: ±40MHz | ≥40dB  |
| 40MHz System     | 20MHz < OBW < 40MHz | 40MHz (±20MHz)  | Adjacent Channel: ±40MHz        | ≥25dB  |
|                  |                     |                 | Second Adjacent Channel: ±80MHz | ≥40dB  |
| 80MHz System     | 40MHz < OBW < 80MHz | 80MHz (±40MHz)  | Adjacent Channel: ±80MHz        | ≥25dB  |

### Test Procedure

1. EUT have transmitted the maximum modulation signal and fixed channelize.
2. Setting of SA is following as: RB: 300 kHz / VB: 300 kHz / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold
3. SA set the Channel Power Function and Channel Bandwidth: Sweep bandwidth corresponding to the tested signal, Center Frequency: The center frequency of testing for EUT, adjacent channel and second adjacent Channel as "Adjacent Channel" above. Then SA automatically calculate the channel power of EUT and adjacent channel power


### Test Setup Block diagram

SISO:

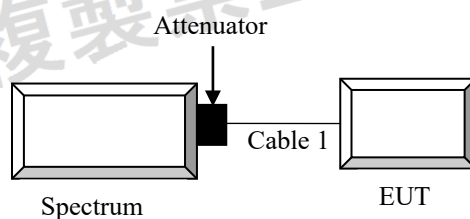

Note : Offset = 10dB Attenuator + Cable 1 loss (0.5dB) = 10.5dB

MIMO:

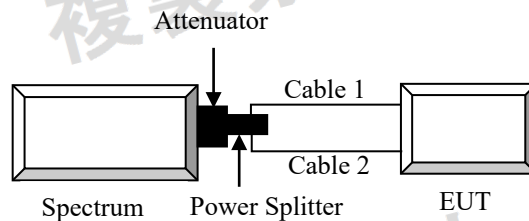

Note : Offset = 10dB Attenuator + Power divider loss (6dB) + Cable 1 loss (0.5dB) + Cable 2 loss (1dB) = 17.5dB


## Receiver Secondary Radiated Emission Strength

### Limit

4nW or below (Frequency range: 30MHz – 1GHz); 20n W or below (frequency range: 1GHz – 26GHz).

### Test Procedure

#### Measurement System Diagram

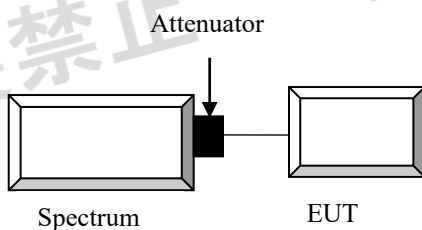

Note : The worst cable loss among the test frequency range was added into plots.

#### Conditions of Application Equipment (EUT)

- The modulation state shall be “continuous receiving mode”.

#### Spectrum Analyzer Conditions

- Start Frequency: Start Frequency of frequency range to measure (30MHz or 1GHz)
- Stop Frequency: Stop Frequency of frequency range to measure (1GHz or 26GHz)
- Span: AUTO (Measurement Range)
- RBW: 100 kHz, VBW: 100 kHz for Frequency < 1 GHz
- RBW: 1MHz, VBW: 1MHz for Frequency > 1 GHz
- Sweep time: AUTO or more
- Log scale: 10dB/Div, Data points: 501points (400 points or more)
- Detection: Positive Peak
- Reference Level: Enough level for maximum dynamic range


## Radio Interference Prevention Capability

### Requirement

The EUT shall have the interference prevention capability to transmit or to receive the identification automatically, so that sender and receiver shall exclude other equipment.

### Test Procedure

#### Measurement System Diagram

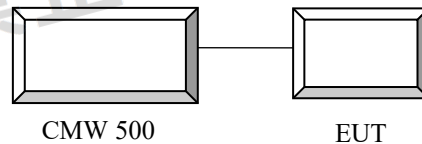

In the case that the EUT has the function of automatically transmitting the identification code:

1. Transmit the predetermined identification codes from EUT
2. Check the transmitted identification codes with the demodulator.

In the case of receiving the identification codes:

1. Transmit the predetermined identification codes from the counterpart.
2. Check if communication is normal
3. Transmit the signal other than predetermined ID codes from the counterpart.
4. Check if the EUT stops the transmission, or if it displays that identification codes are different from the predetermined ones.


## Transmission Burst Length

### Limit

| Item                      | Limit       |
|---------------------------|-------------|
| Transmission Burst Length | $\leq 8$ ms |

### Test Procedure

#### Measurement System Diagram

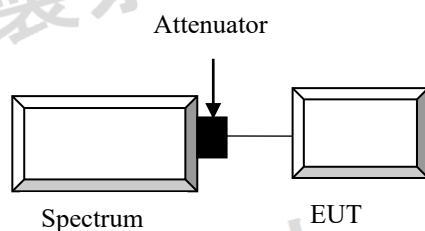

1. The transmitter output (antenna port) was connected to the spectrum analyzer
2. Set RBW of spectrum analyzer to 10MHz and VBW to 10MHz.
3. Use a video trigger with the trigger level set to enable triggering only on full pulses.
4. Sweep Time is more than once pulse time.
5. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
6. Measure the maximum time duration of one single pulse.


## Carrier Sensing Function

### Limit

EUT stop RF transmission signal after carrier inject to EUT

### Test Procedure

Measurement System Diagram

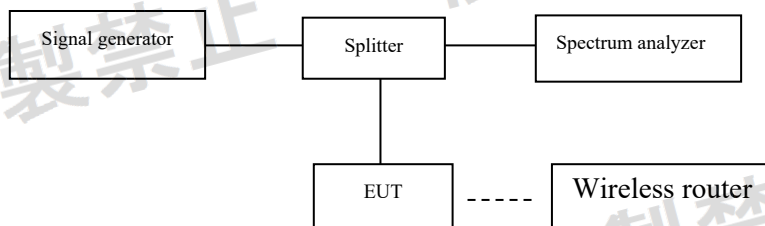

### Conditions of Application Equipment (EUT)

- The EUT state shall be “normal mode link with wireless router”.

### Test Procedure

1. SG adjusted the frequency as same as the EUT transmitted signal and emitted the absence of modulation from SG and power level is

$$P_{cs} = \frac{G \lambda^2}{480 \pi^2} \times E^2$$

2. Turn off the RF signal of the SG.
3. EUT have transmitted the maximum modulation signal and fixed channelize.
4. Setting of SA: RBW/VBW=1MHz/1MHz, Span=50MHz, Sweep time=auto, Sweep mode=continuous, Detect mode=positive peak
5. SG RF signal on.
6. EUT shall be stop the transmitted any signal and SG RF signal off, the EUT will be continuous transmitted signal.

**TEST DATA AND RESULTS****Frequency Error****Test Information:**

|             |             |              |                       |
|-------------|-------------|--------------|-----------------------|
| Serial No.: | 3FUD-2      | Test Date:   | 2026/02/05~2026/03/18 |
| Test Site:  | RF          | Test Mode:   | Transmitting          |
| Tester:     | Cheeb Huang | Test Result: | Pass                  |

**Environmental Conditions:**

|                      |           |                              |       |                        |             |
|----------------------|-----------|------------------------------|-------|------------------------|-------------|
| Temperature:<br>(°C) | 23.2~23.6 | Relative<br>Humidity:<br>(%) | 54~60 | ATM Pressure:<br>(kPa) | 101.2~101.5 |
|----------------------|-----------|------------------------------|-------|------------------------|-------------|

**Test Condition: NV****5.2G, Chain 0**

| Mode           | Frequency (MHz) | Measure Frequency (MHz) | Frequency Tolerance (ppm) | Limit (ppm) | Verdict |
|----------------|-----------------|-------------------------|---------------------------|-------------|---------|
| Single Carrier | 5180            | 5179.99255              | -1.44                     | ± 20        | Pass    |
|                | 5190            | 5189.99324              | -1.30                     | ± 20        | Pass    |
|                | 5200            | 5199.99216              | -1.51                     | ± 20        | Pass    |
|                | 5210            | 5209.99255              | -1.43                     | ± 20        | Pass    |
|                | 5230            | 5229.99303              | -1.33                     | ± 20        | Pass    |
|                | 5240            | 5239.99177              | -1.57                     | ± 20        | Pass    |

**5.2G, Chain 1**

| Mode           | Frequency (MHz) | Measure Frequency (MHz) | Frequency Tolerance (ppm) | Limit (ppm) | Verdict |
|----------------|-----------------|-------------------------|---------------------------|-------------|---------|
| Single Carrier | 5180            | 5179.99085              | -1.77                     | ± 20        | Pass    |
|                | 5190            | 5189.99175              | -1.59                     | ± 20        | Pass    |
|                | 5200            | 5199.99115              | -1.70                     | ± 20        | Pass    |
|                | 5210            | 5209.99175              | -1.58                     | ± 20        | Pass    |
|                | 5230            | 5229.99145              | -1.63                     | ± 20        | Pass    |
|                | 5240            | 5239.99145              | -1.63                     | ± 20        | Pass    |

**5.3G, Chain 0**

| Mode           | Frequency (MHz) | Measure Frequency (MHz) | Frequency Tolerance (ppm) | Limit (ppm) | Verdict |
|----------------|-----------------|-------------------------|---------------------------|-------------|---------|
| Single Carrier | 5260            | 5259.99354              | -1.23                     | ± 20        | Pass    |
|                | 5270            | 5269.99186              | -1.54                     | ± 20        | Pass    |
|                | 5280            | 5279.99255              | -1.41                     | ± 20        | Pass    |
|                | 5290            | 5289.99147              | -1.61                     | ± 20        | Pass    |
|                | 5310            | 5309.99087              | -1.72                     | ± 20        | Pass    |
|                | 5320            | 5319.99186              | -1.53                     | ± 20        | Pass    |

**5.3G, Chain 1**

| Mode           | Frequency (MHz) | Measure Frequency (MHz) | Frequency Tolerance (ppm) | Limit (ppm) | Verdict |
|----------------|-----------------|-------------------------|---------------------------|-------------|---------|
| Single Carrier | 5260            | 5259.99145              | -1.63                     | ± 20        | Pass    |
|                | 5270            | 5269.99025              | -1.85                     | ± 20        | Pass    |
|                | 5280            | 5279.99205              | -1.51                     | ± 20        | Pass    |
|                | 5290            | 5289.99055              | -1.79                     | ± 20        | Pass    |
|                | 5310            | 5309.99055              | -1.78                     | ± 20        | Pass    |
|                | 5320            | 5319.99085              | -1.72                     | ± 20        | Pass    |

**5.6G, Chain 0**

| Mode           | Frequency (MHz) | Measure Frequency (MHz) | Frequency Tolerance (ppm) | Limit (ppm) | Verdict |
|----------------|-----------------|-------------------------|---------------------------|-------------|---------|
| Single Carrier | 5500            | 5499.99087              | -1.66                     | ± 20        | Pass    |
|                | 5510            | 5509.99156              | -1.53                     | ± 20        | Pass    |
|                | 5530            | 5529.99186              | -1.47                     | ± 20        | Pass    |
|                | 5590            | 5589.99234              | -1.37                     | ± 20        | Pass    |
|                | 5600            | 5599.99147              | -1.52                     | ± 20        | Pass    |
|                | 5610            | 5609.99207              | -1.41                     | ± 20        | Pass    |
|                | 5690            | 5689.99255              | -1.31                     | ± 20        | Pass    |
|                | 5710            | 5709.99147              | -1.49                     | ± 20        | Pass    |
|                | 5720            | 5719.99156              | -1.48                     | ± 20        | Pass    |

**5.6G, Chain 1**


| Mode           | Frequency (MHz) | Measure Frequency (MHz) | Frequency Tolerance (ppm) | Limit (ppm) | Verdict |
|----------------|-----------------|-------------------------|---------------------------|-------------|---------|
| Single Carrier | 5500            | 5499.99145              | -1.55                     | ± 20        | Pass    |
|                | 5510            | 5509.99445              | -1.01                     | ± 20        | Pass    |
|                | 5530            | 5529.99175              | -1.49                     | ± 20        | Pass    |
|                | 5590            | 5589.99265              | -1.31                     | ± 20        | Pass    |
|                | 5600            | 5599.99205              | -1.42                     | ± 20        | Pass    |
|                | 5610            | 5609.99205              | -1.42                     | ± 20        | Pass    |
|                | 5690            | 5689.99175              | -1.45                     | ± 20        | Pass    |
|                | 5710            | 5709.99295              | -1.23                     | ± 20        | Pass    |
|                | 5720            | 5719.99235              | -1.34                     | ± 20        | Pass    |

Note:

Frequency Tolerance = (Measure Frequency - Frequency)/Frequency\*10<sup>6</sup>


## W52, Chain 0, Test Condition: NV

5180MHz

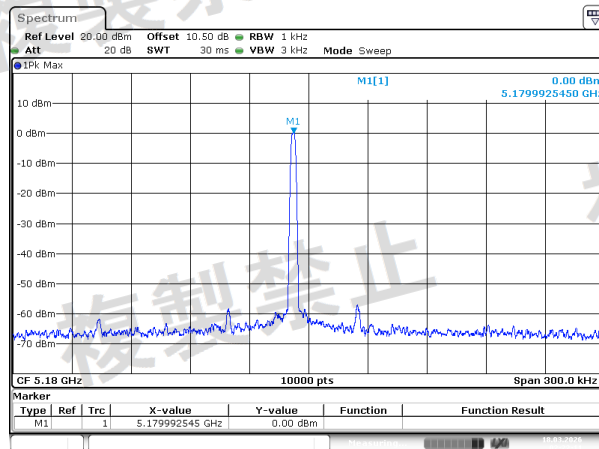


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 02:22:11

5190MHz

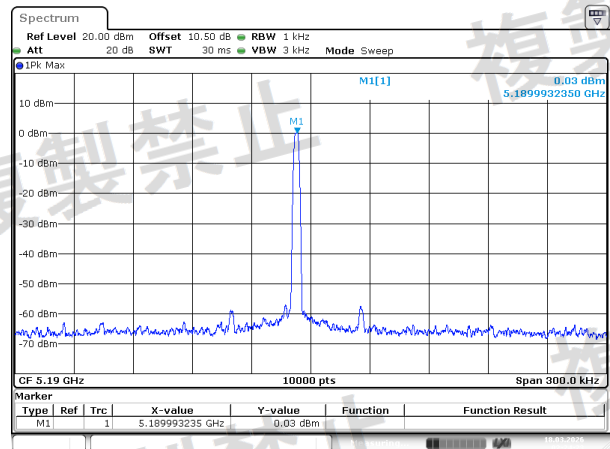


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 02:24:23

5200MHz

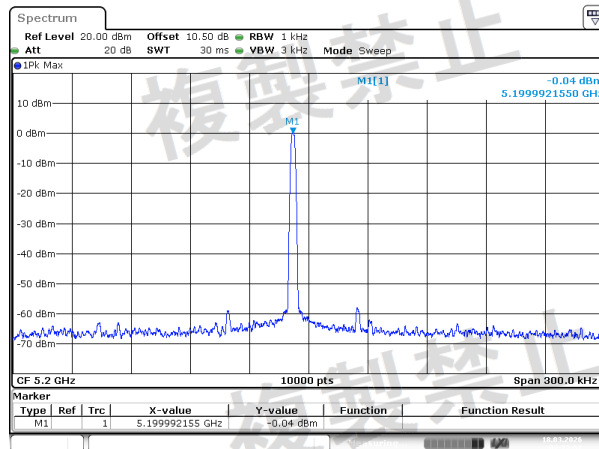


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 02:22:52

5210MHz

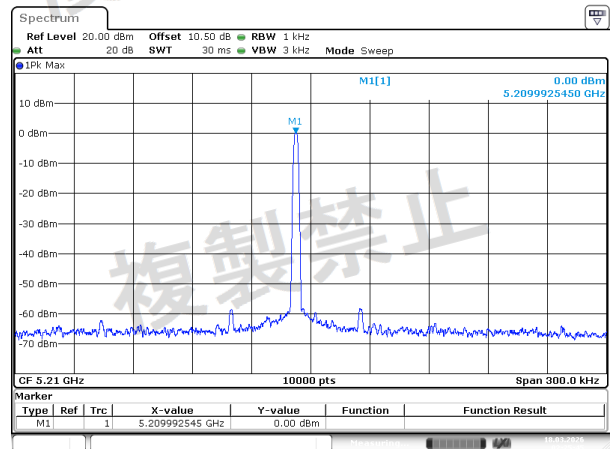


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 02:25:46

5230MHz

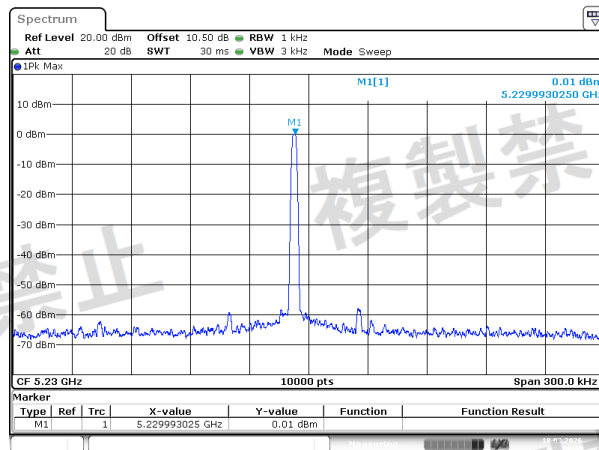

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 02:24:58


5240MHz

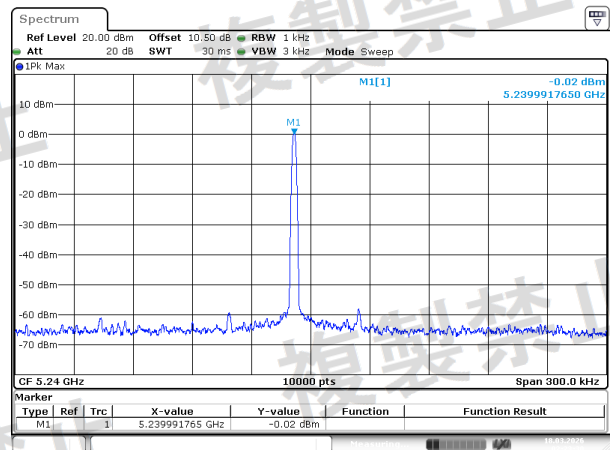

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 02:23:30


## W52, Chain 1, Test Condition: NV

5180MHz

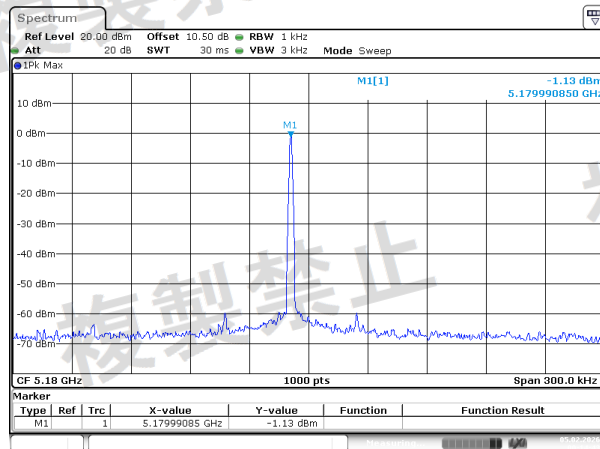


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.FEB.2026 00:14:43

5190MHz

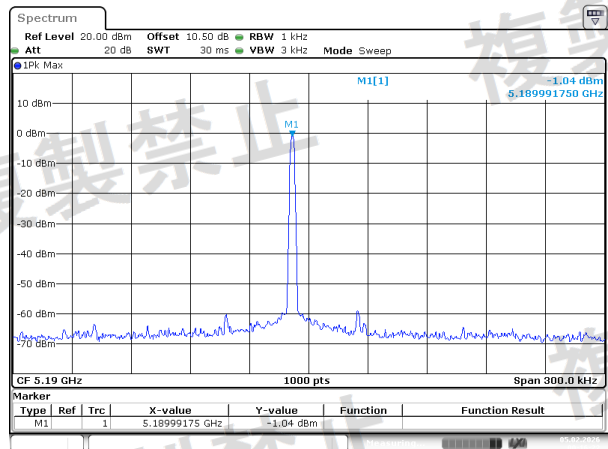


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.FEB.2026 00:16:23

5200MHz

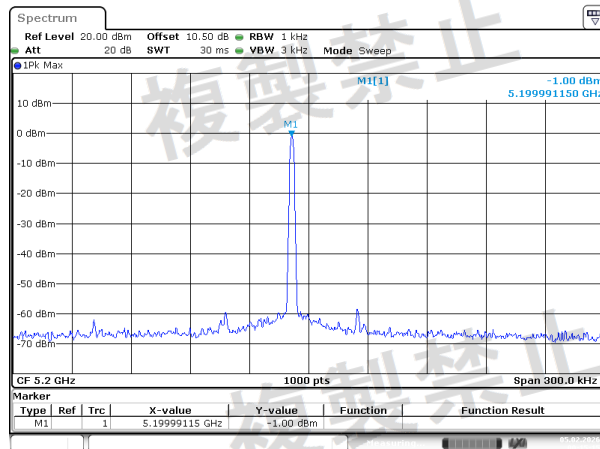


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.FEB.2026 00:15:16

5210MHz

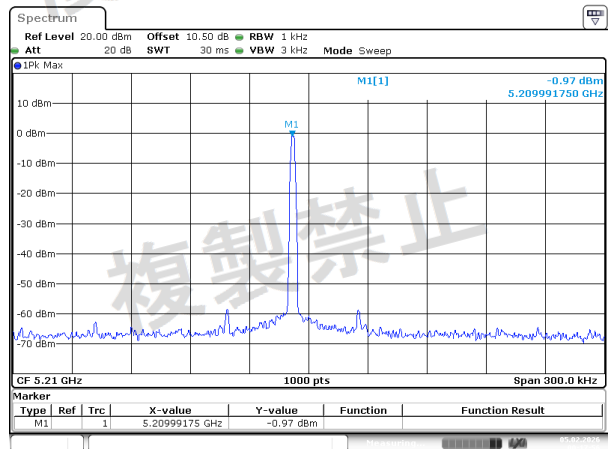


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.FEB.2026 00:17:56

5230MHz

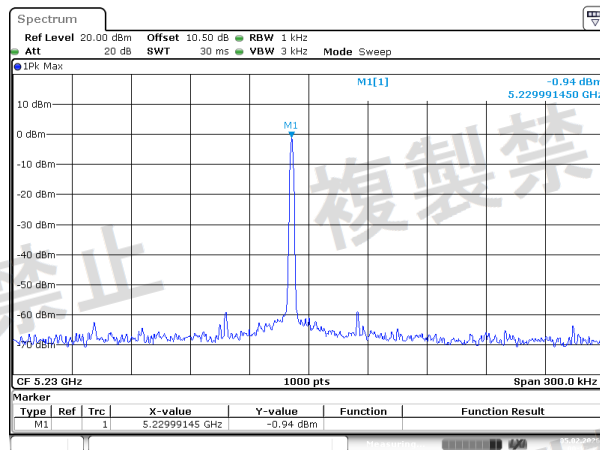

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.FEB.2026 00:17:13


5240MHz

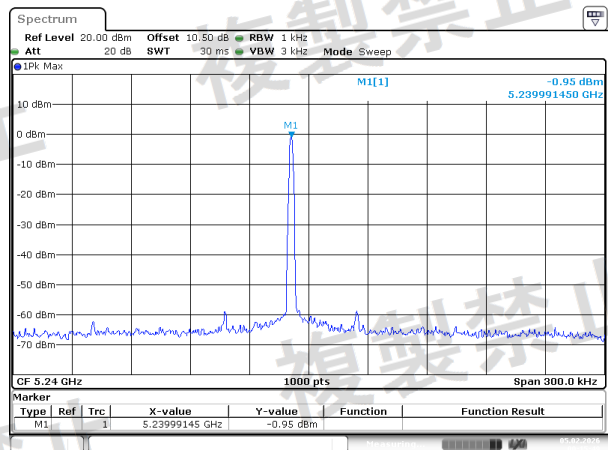


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.FEB.2026 00:15:50

## W53, Chain 0, Test Condition: NV


5260MHz

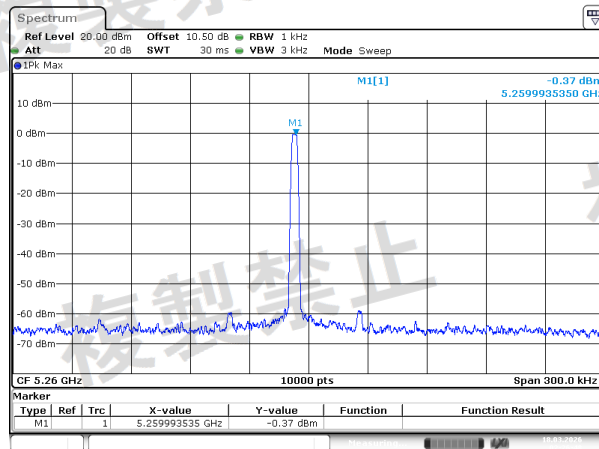


5270MHz

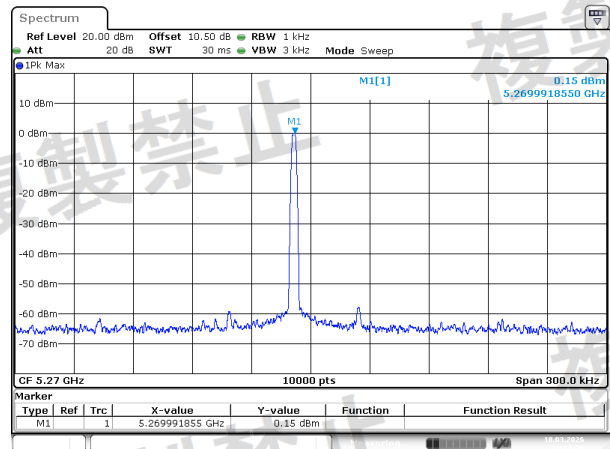


5280MHz

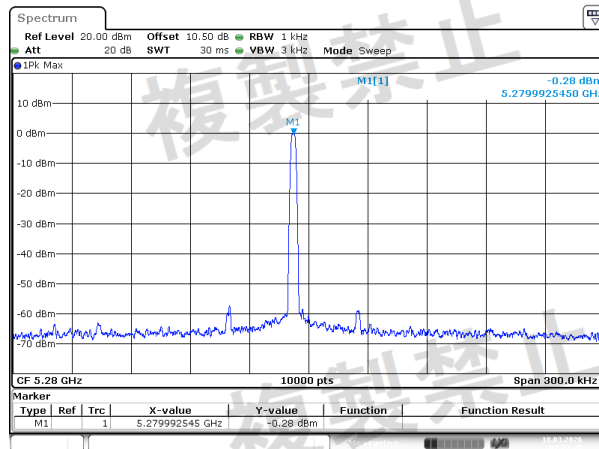


5290MHz

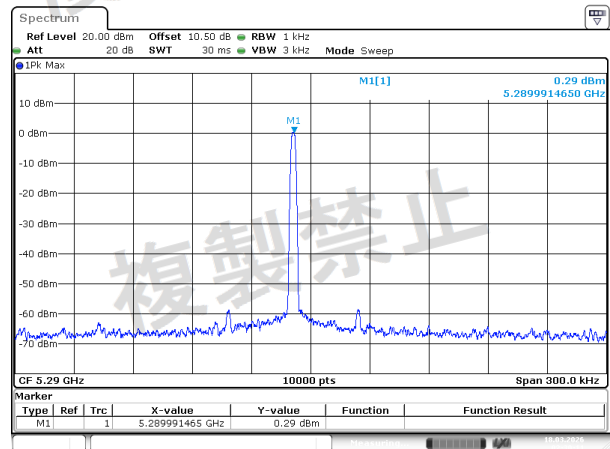

5310MHz

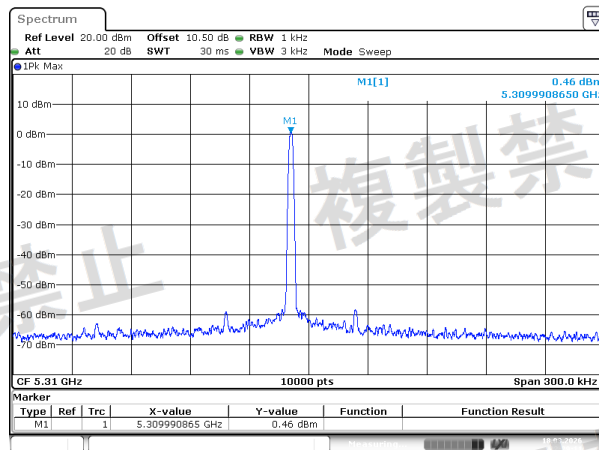


5320MHz

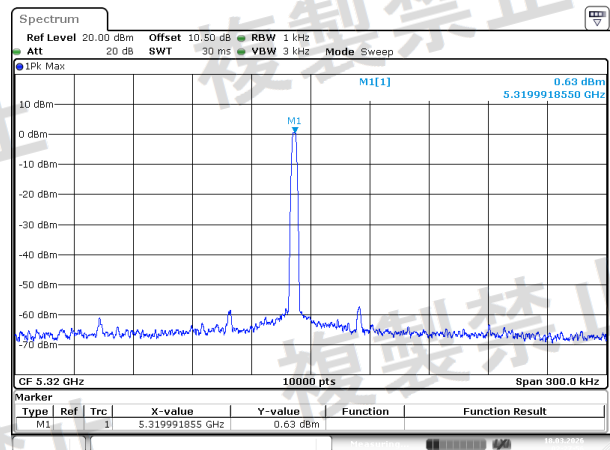


## W53, Chain 1, Test Condition: NV

5260MHz

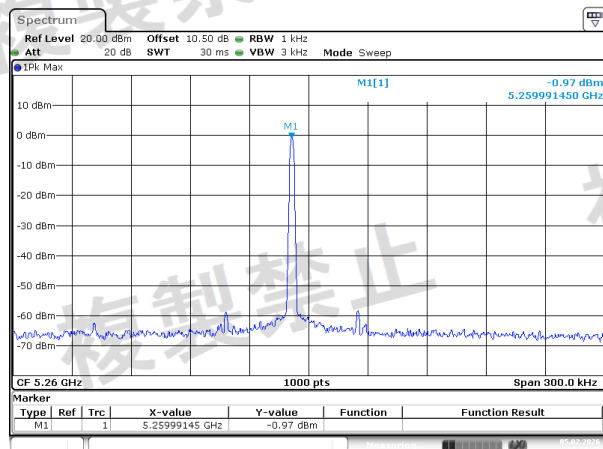


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.FEB.2026 00:19:01

5270MHz

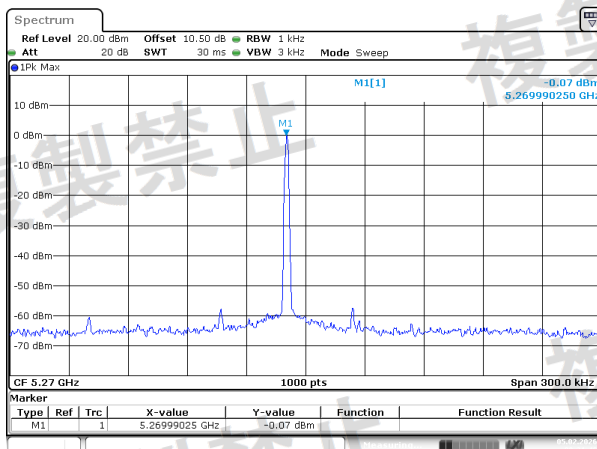


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.FEB.2026 00:21:47

5280MHz

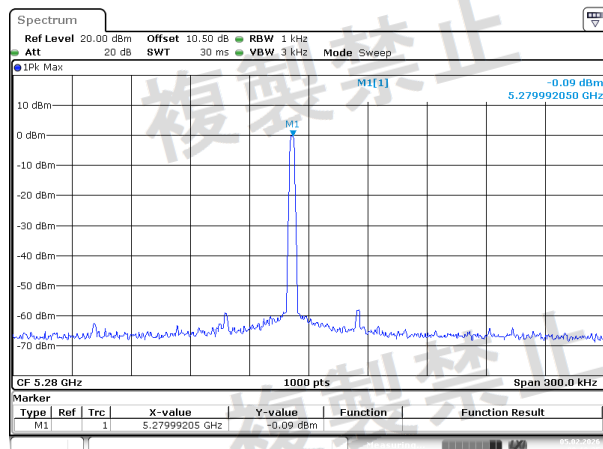


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.FEB.2026 00:19:36

5290MHz

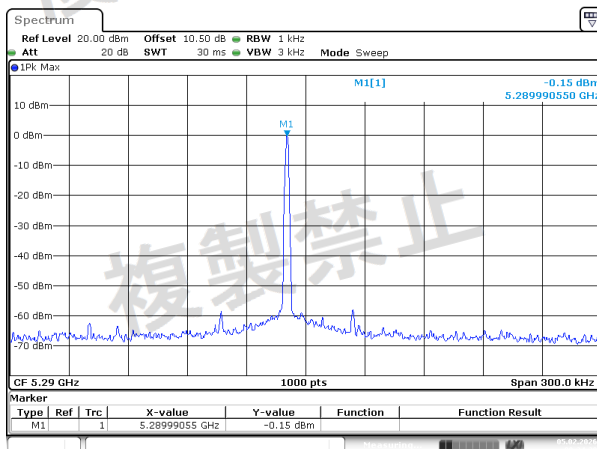


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.FEB.2026 00:24:21

5310MHz

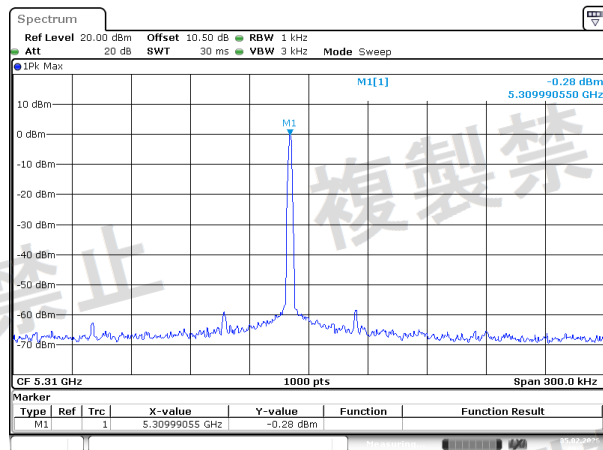

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.FEB.2026 00:22:44


5320MHz

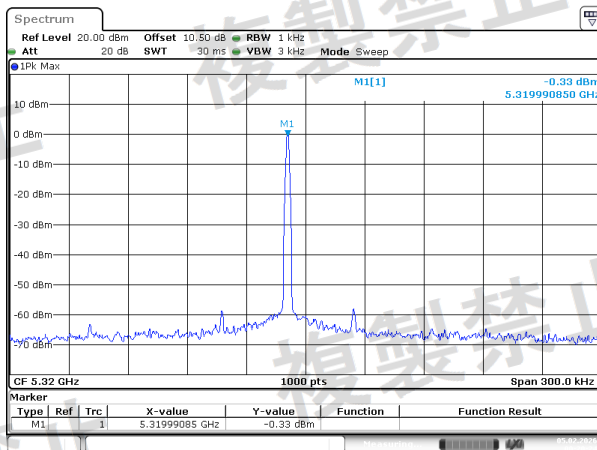

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.FEB.2026 00:20:25


## W56, Chain 0, Test Condition: NV

5500MHz

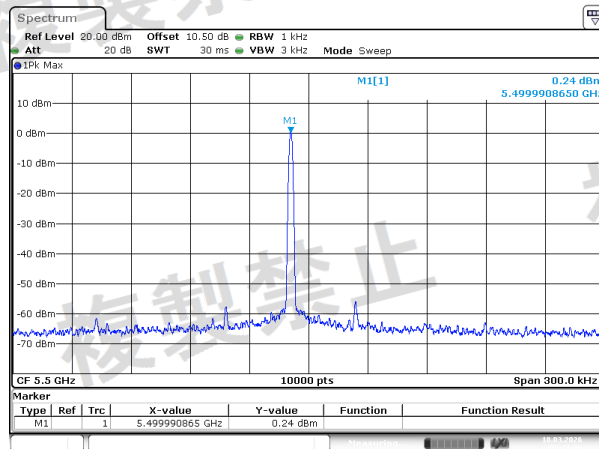


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 02:31:06

5510MHz

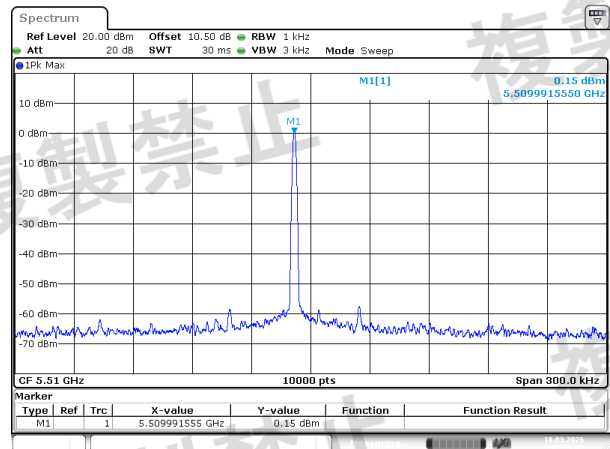


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 02:35:08

5530MHz

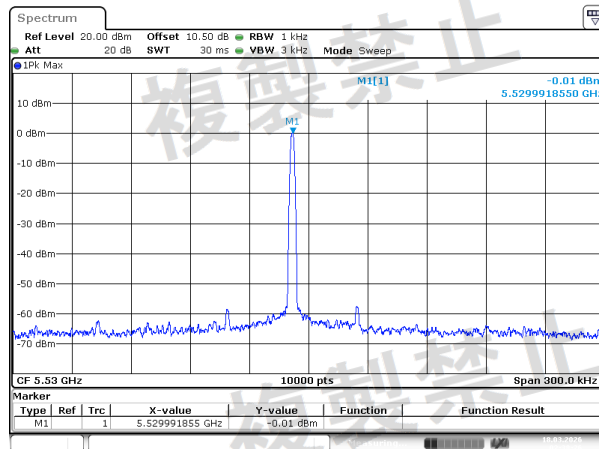


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 02:38:26

5590MHz

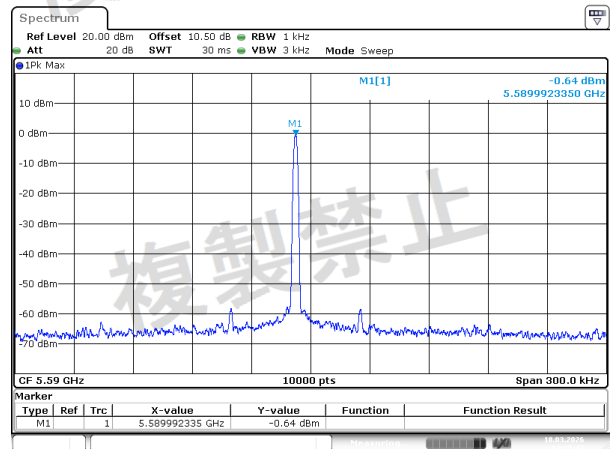


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 02:35:17

5600MHz

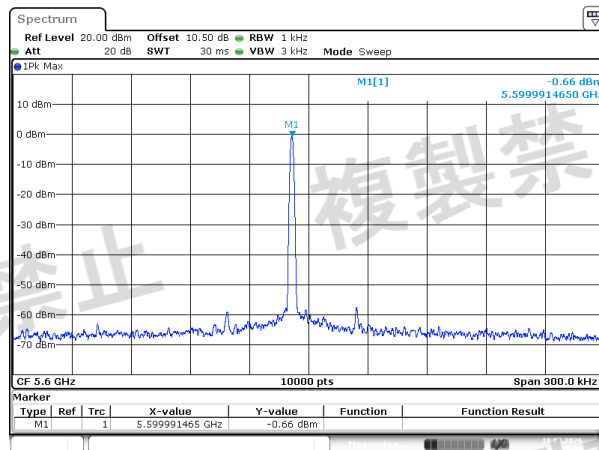


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 02:32:08

5610MHz

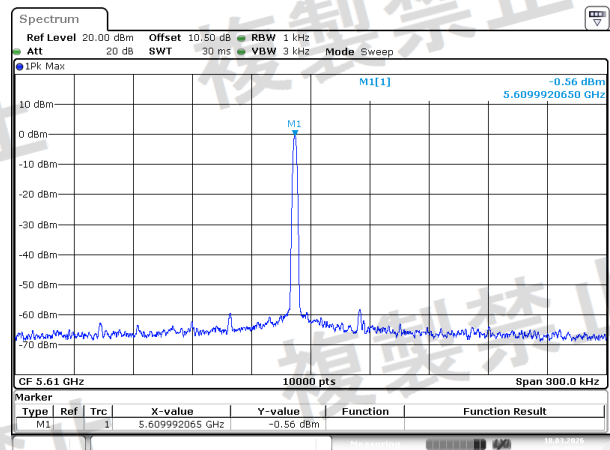


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 02:40:33

5690MHz

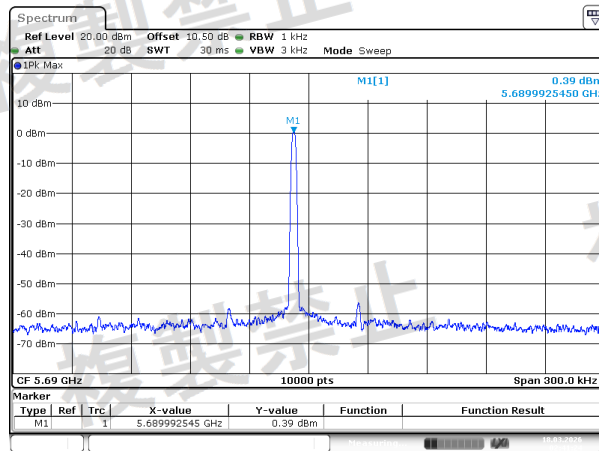

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 02:41:24


5710MHz

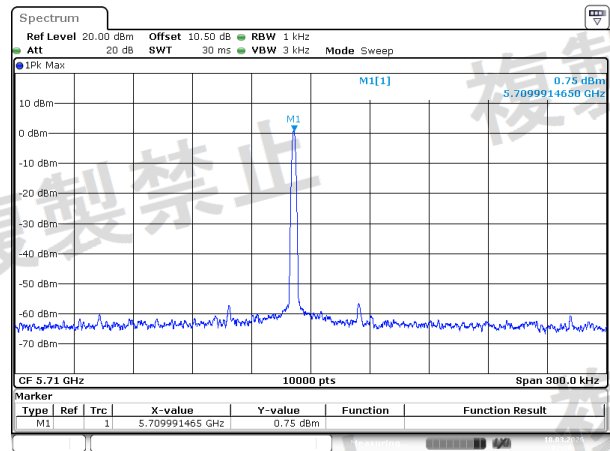

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 02:46:40


W56, Chain 1, Test Condition: NV

5720MHz

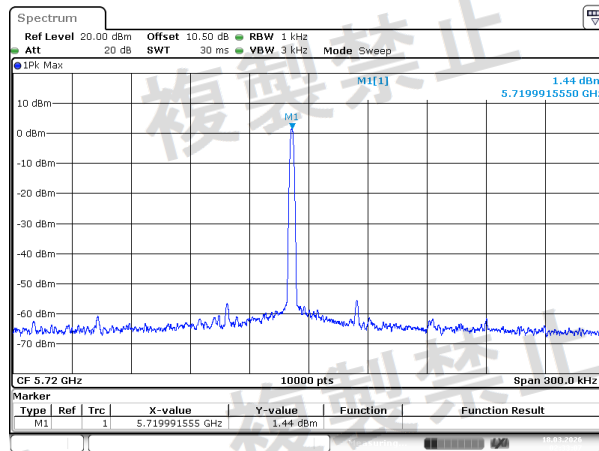


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 02:13:08

5500MHz

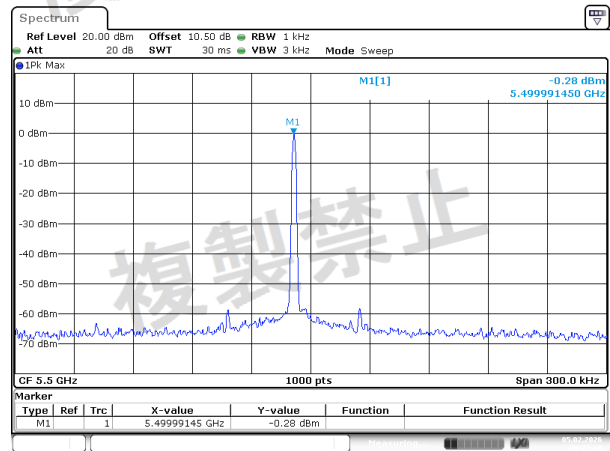


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.FEB.2026 00:27:30

5510MHz

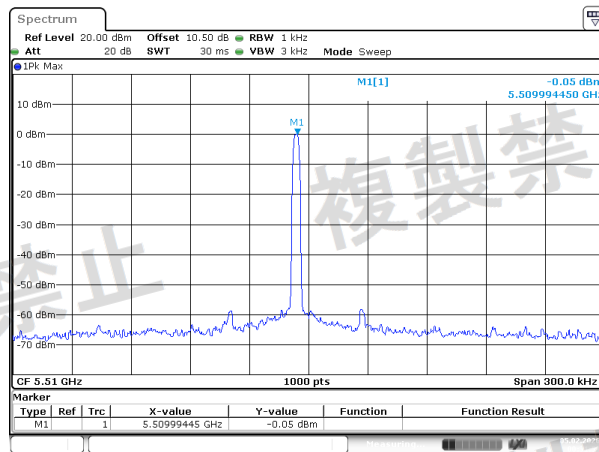


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.FEB.2026 00:32:00

5530MHz

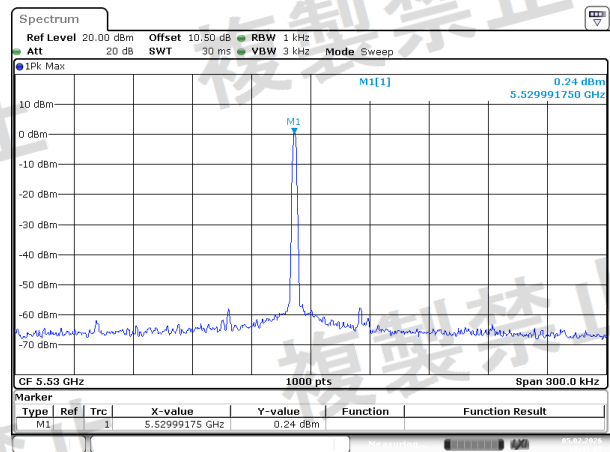


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.FEB.2026 00:41:06

5590MHz

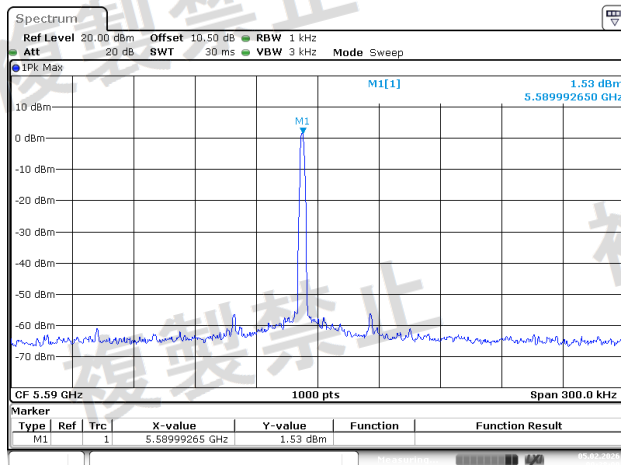


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.FEB.2026 00:38:10

5600MHz

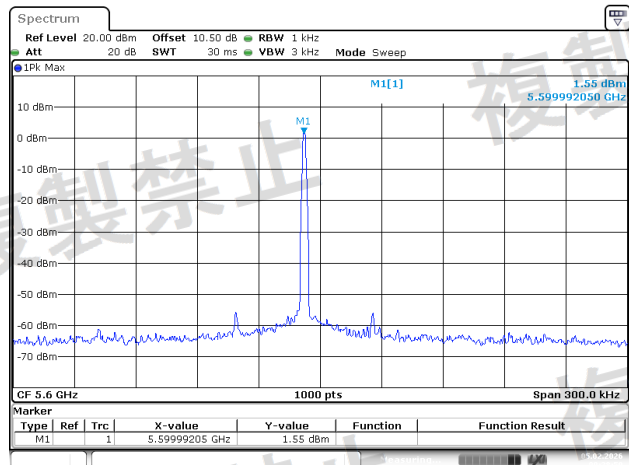


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.FEB.2026 00:28:51

5610MHz

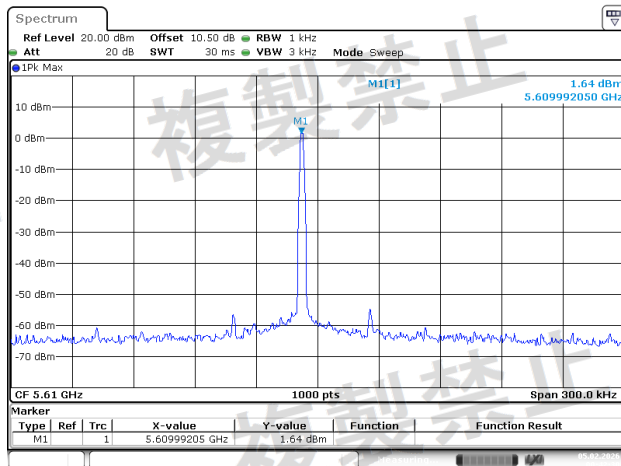


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.FEB.2026 00:42:31

5690MHz

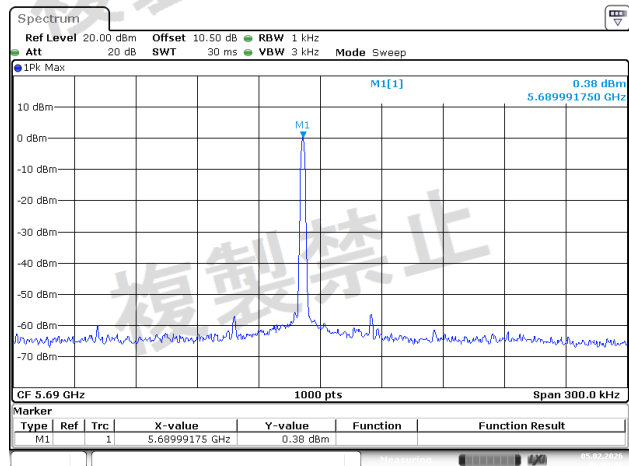


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.FEB.2026 00:43:48

5710MHz

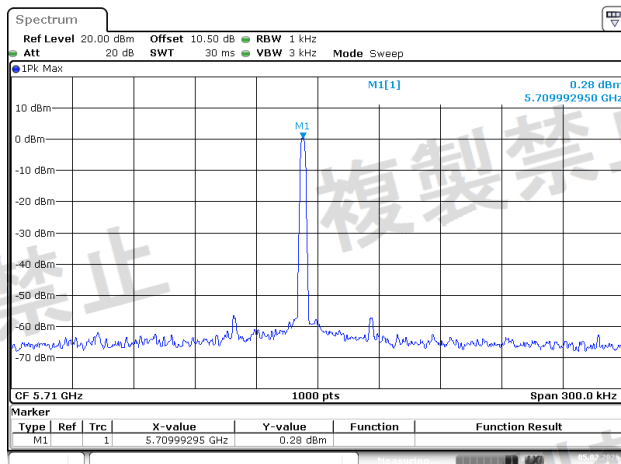

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.FEB.2026 00:39:37

5720MHz

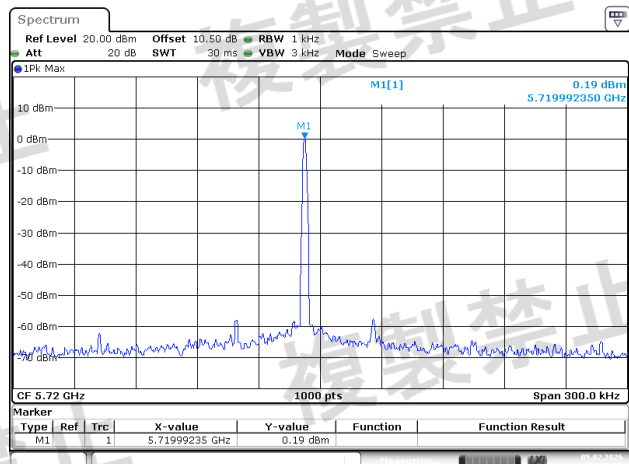

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.FEB.2026 00:29:40

**Occupied Bandwidth****Test Information:**

|             |             |              |                       |
|-------------|-------------|--------------|-----------------------|
| Serial No.: | 3FUD-2      | Test Date:   | 2026/02/02~2026/02/04 |
| Test Site:  | RF          | Test Mode:   | Transmitting          |
| Tester:     | Cheeb Huang | Test Result: | Pass                  |

**Environmental Conditions:**

|                      |           |                              |       |                        |             |
|----------------------|-----------|------------------------------|-------|------------------------|-------------|
| Temperature:<br>(°C) | 23.2~28.9 | Relative<br>Humidity:<br>(%) | 50~57 | ATM Pressure:<br>(kPa) | 101.5~101.9 |
|----------------------|-----------|------------------------------|-------|------------------------|-------------|

**Test Condition: NV****5.2G, Chain 0**

| Mode       | Result(MHz) |                |              | Limit(MHz) | Verdict |
|------------|-------------|----------------|--------------|------------|---------|
|            | Low Channel | Middle Channel | High Channel |            |         |
| 802.11a    | 16.76       | 16.79          | 16.76        | $\leq 20$  | Pass    |
| 802.11ac20 | 17.84       | 17.84          | 17.84        | $\leq 20$  | Pass    |
| 802.11ac40 | 36.32       | /              | 36.32        | $\leq 40$  | Pass    |
| 802.11ac80 | /           | 75.52          | /            | $\leq 80$  | Pass    |
| 802.11ax20 | 19.08       | 19.04          | 19.08        | $\leq 20$  | Pass    |
| 802.11ax40 | 37.92       | /              | 37.92        | $\leq 40$  | Pass    |
| 802.11ax80 | /           | 77.12          | /            | $\leq 80$  | Pass    |

**5.2G, Chain 1**

| Mode       | Result(MHz) |                |              | Limit(MHz) | Verdict |
|------------|-------------|----------------|--------------|------------|---------|
|            | Low Channel | Middle Channel | High Channel |            |         |
| 802.11a    | 16.68       | 16.67          | 16.68        | $\leq 20$  | Pass    |
| 802.11ac20 | 17.80       | 17.76          | 17.80        | $\leq 20$  | Pass    |
| 802.11ac40 | 36.32       | /              | 36.32        | $\leq 40$  | Pass    |
| 802.11ac80 | /           | 75.36          | /            | $\leq 80$  | Pass    |
| 802.11ax20 | 19.00       | 19.00          | 18.96        | $\leq 20$  | Pass    |
| 802.11ax40 | 37.92       | /              | 37.86        | $\leq 40$  | Pass    |
| 802.11ax80 | /           | 77.12          | /            | $\leq 80$  | Pass    |

**5.3G, Chain 0**

| Mode       | Result(MHz) |                |              | Limit(MHz) | Verdict |
|------------|-------------|----------------|--------------|------------|---------|
|            | Low Channel | Middle Channel | High Channel |            |         |
| 802.11a    | 16.76       | 16.76          | 16.76        | $\leq 20$  | Pass    |
| 802.11ac20 | 17.88       | 17.88          | 17.84        | $\leq 20$  | Pass    |
| 802.11ac40 | 36.32       | /              | 36.32        | $\leq 40$  | Pass    |
| 802.11ac80 | /           | 75.48          | /            | $\leq 80$  | Pass    |
| 802.11ax20 | 19.04       | 19.08          | 19.08        | $\leq 20$  | Pass    |
| 802.11ax40 | 37.92       | /              | 37.92        | $\leq 40$  | Pass    |
| 802.11ax80 | /           | 77.34          | /            | $\leq 80$  | Pass    |

**5.3G, Chain 1**

| Mode       | Result(MHz) |                |              | Limit(MHz) | Verdict |
|------------|-------------|----------------|--------------|------------|---------|
|            | Low Channel | Middle Channel | High Channel |            |         |
| 802.11a    | 16.68       | 16.68          | 16.76        | $\leq 20$  | Pass    |
| 802.11ac20 | 17.80       | 17.76          | 17.76        | $\leq 20$  | Pass    |
| 802.11ac40 | 36.32       | /              | 36.32        | $\leq 40$  | Pass    |
| 802.11ac80 | /           | 75.36          | /            | $\leq 80$  | Pass    |
| 802.11ax20 | 19.00       | 19.00          | 18.96        | $\leq 20$  | Pass    |
| 802.11ax40 | 37.92       | /              | 37.92        | $\leq 40$  | Pass    |
| 802.11ax80 | /           | 77.12          | /            | $\leq 80$  | Pass    |

**5.6G, Chain 0**


| Mode       | Result(MHz) |                |              | Limit(MHz) | Verdict |
|------------|-------------|----------------|--------------|------------|---------|
|            | Low Channel | Middle Channel | High Channel |            |         |
| 802.11a    | 16.76       | 16.80          | 16.72        | $\leq 20$  | Pass    |
| 802.11ac20 | 17.84       | 17.84          | 17.80        | $\leq 20$  | Pass    |
| 802.11ac40 | 36.32       | 36.32          | 36.32        | $\leq 40$  | Pass    |
| 802.11ac80 | 75.36       | 75.36          | 75.52        | $\leq 80$  | Pass    |
| 802.11ax20 | 19.00       | 19.00          | 19.00        | $\leq 20$  | Pass    |
| 802.11ax40 | 37.84       | 37.92          | 37.92        | $\leq 40$  | Pass    |
| 802.11ax80 | 77.12       | 77.28          | 77.28        | $\leq 80$  | Pass    |

**5.6G, Chain 1**


| Mode       | Result(MHz) |                |              | Limit(MHz) | Verdict |
|------------|-------------|----------------|--------------|------------|---------|
|            | Low Channel | Middle Channel | High Channel |            |         |
| 802.11a    | 16.76       | 16.84          | 16.68        | $\leq 20$  | Pass    |
| 802.11ac20 | 17.80       | 17.76          | 17.88        | $\leq 20$  | Pass    |
| 802.11ac40 | 36.32       | 36.40          | 36.32        | $\leq 40$  | Pass    |
| 802.11ac80 | 75.52       | 75.36          | 75.52        | $\leq 80$  | Pass    |
| 802.11ax20 | 19.00       | 19.00          | 19.00        | $\leq 20$  | Pass    |
| 802.11ax40 | 37.92       | 37.92          | 37.92        | $\leq 40$  | Pass    |
| 802.11ax80 | 77.28       | 77.44          | 76.96        | $\leq 80$  | Pass    |

## W52, Chain 0, Test Condition: NV


## 802.11a, Low Channel

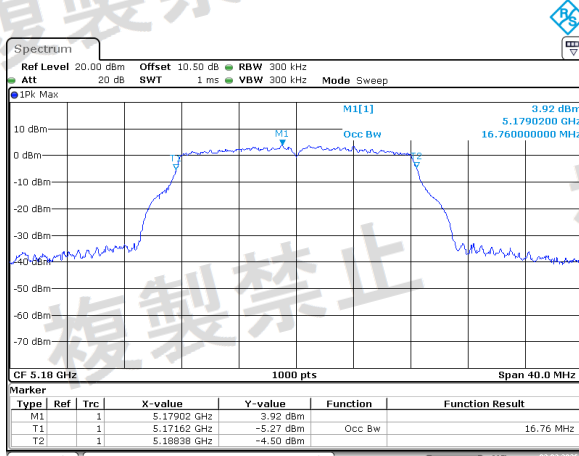


## 802.11a, Middle Channel

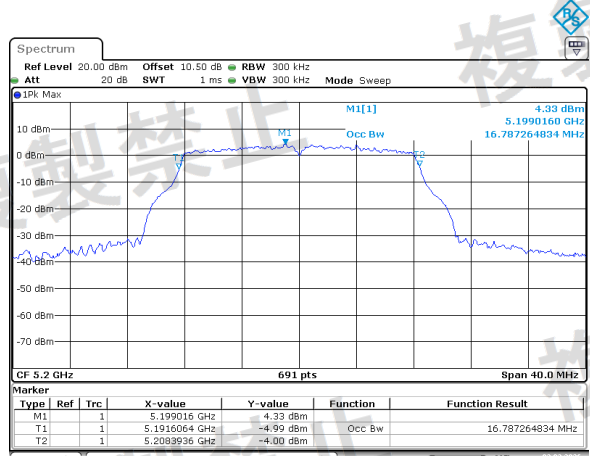


## 802.11a, High Channel

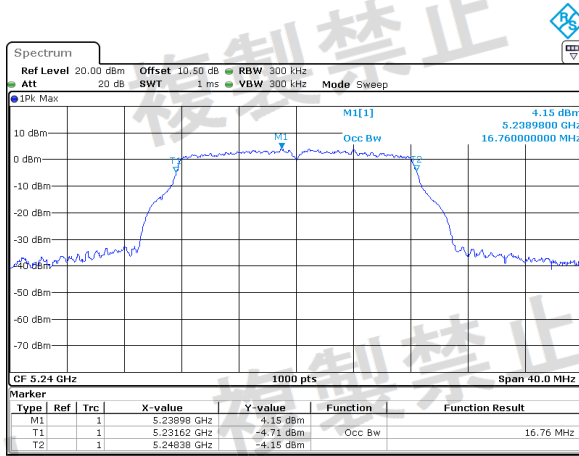


## 802.11ac20, Low Channel

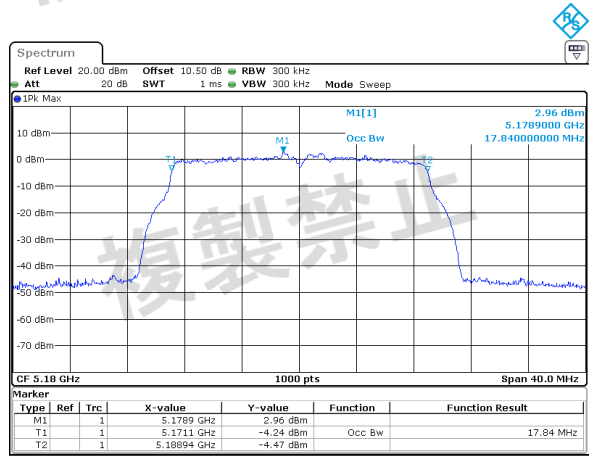


## 802.11ac20, Middle Channel

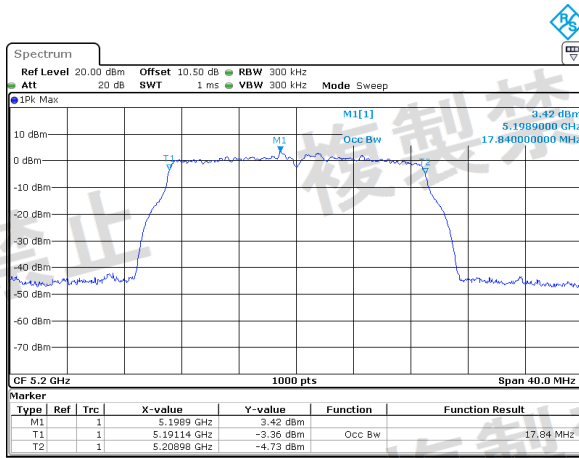

## 802.11ac20, High Channel

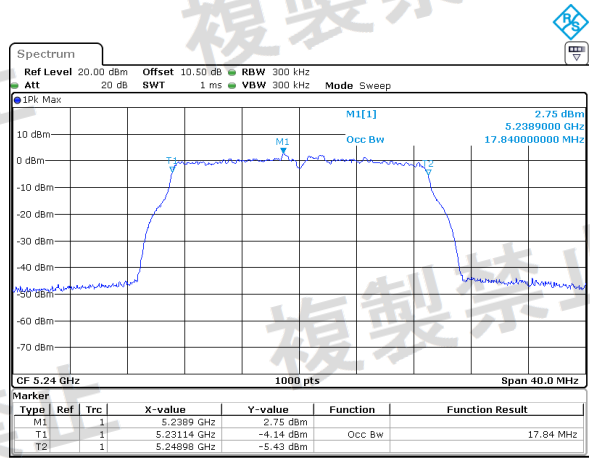


802.11ac40, Low Channel

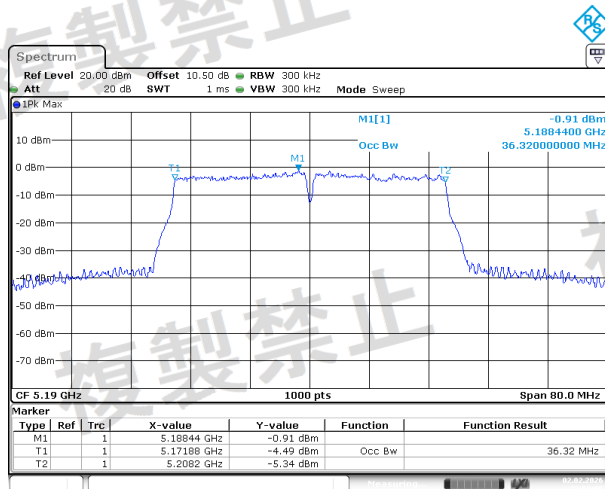


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 2.FEB.2026 23:56:06

802.11ac40, High Channel

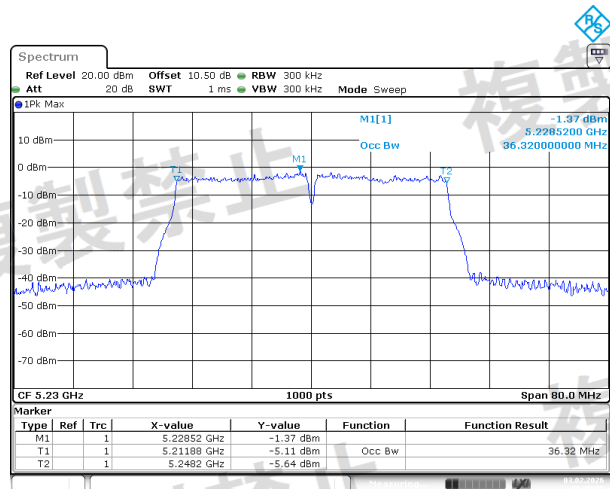


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 00:20:30

802.11ac80, Middle Channel

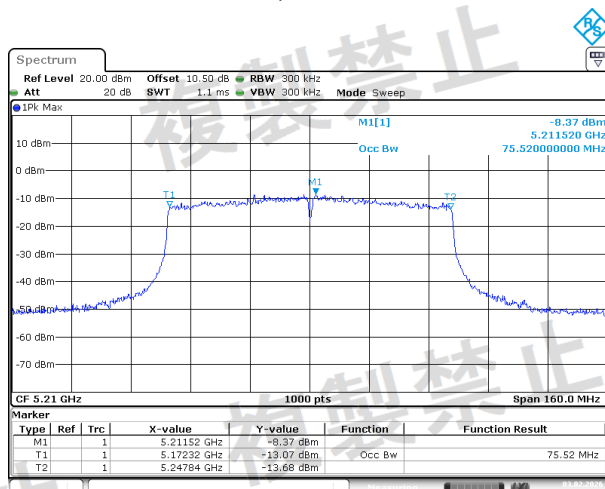


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 00:39:05

802.11ax20, Low Channel

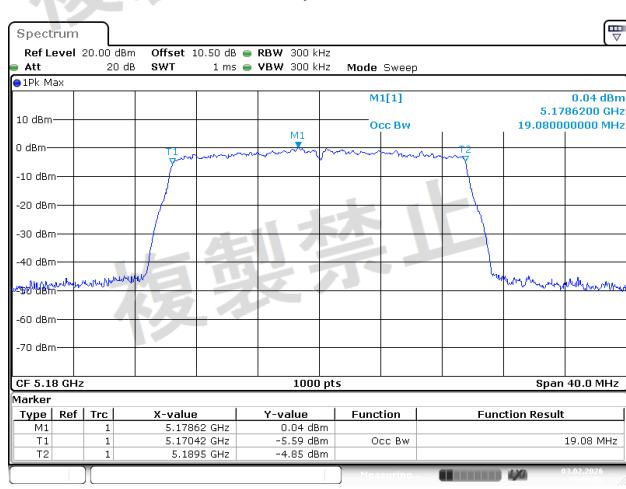


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 18:00:07

802.11ax20, Middle Channel

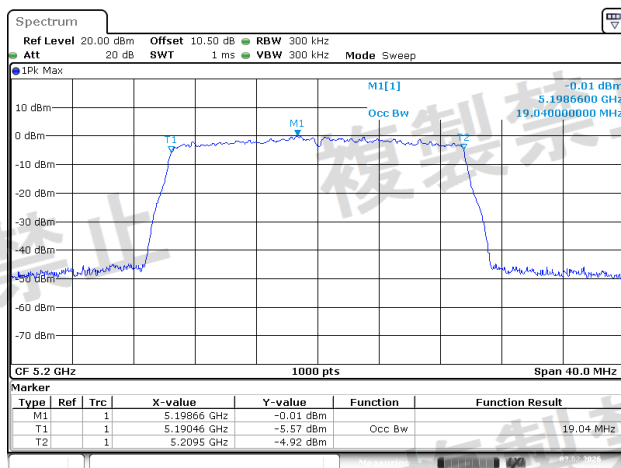


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 18:03:35

802.11ax20, High Channel

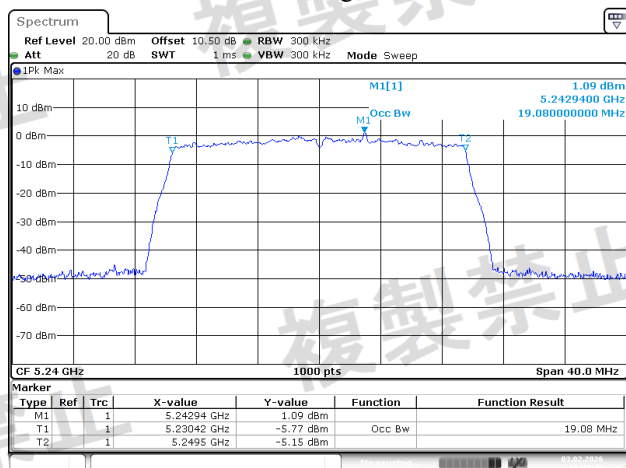


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 18:05:45

802.11ax40, Low Channel

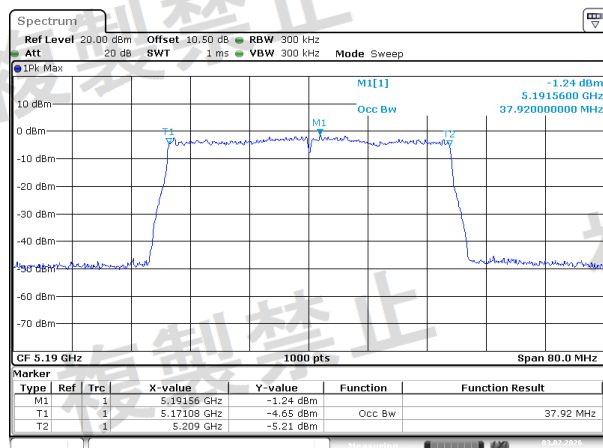

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 19:14:43


802.11ax40, High Channel

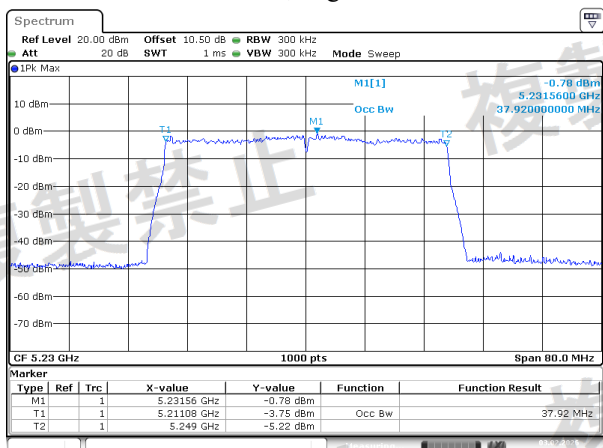

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 19:17:23


W52, Chain 1, Test Condition: NV

802.11ax80, Middle Channel

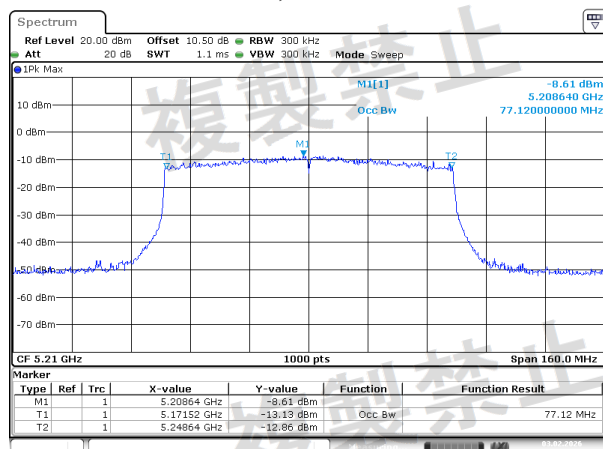


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 19:37:08

802.11a, Low Channel

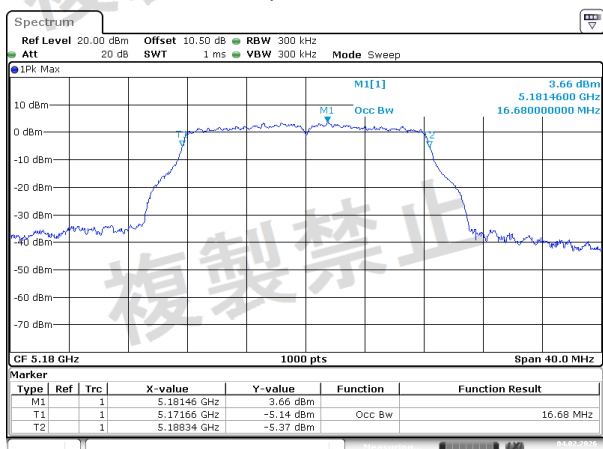


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 4.FEB.2026 00:02:51

802.11a, Middle Channel

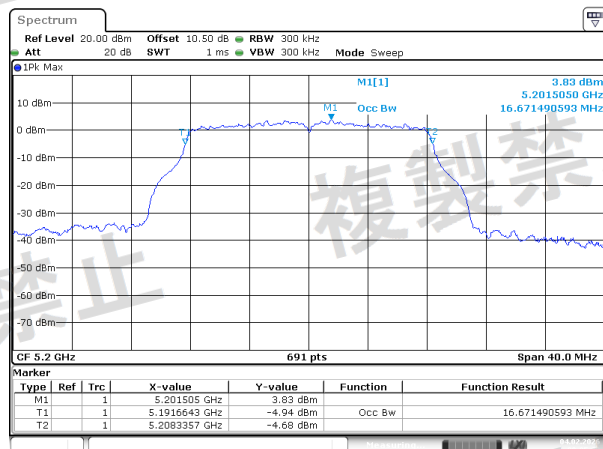


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 4.FEB.2026 00:05:34

802.11a, High Channel

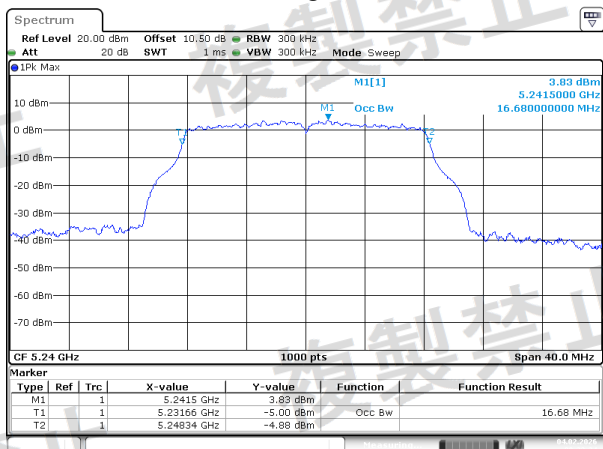


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 4.FEB.2026 00:32:35

## 802.11ac20, Low Channel

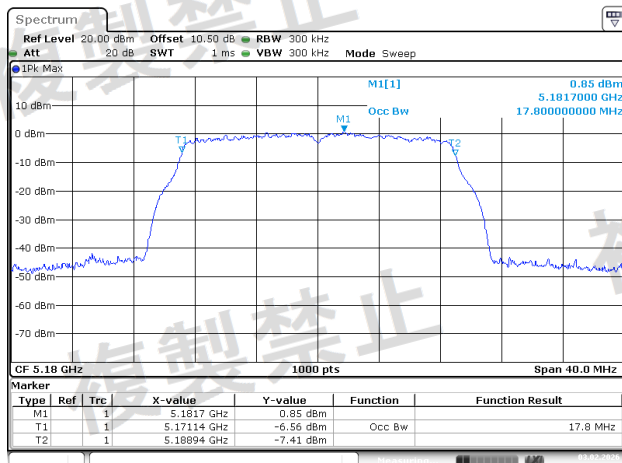


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 22:04:22

## 802.11ac20, Middle Channel

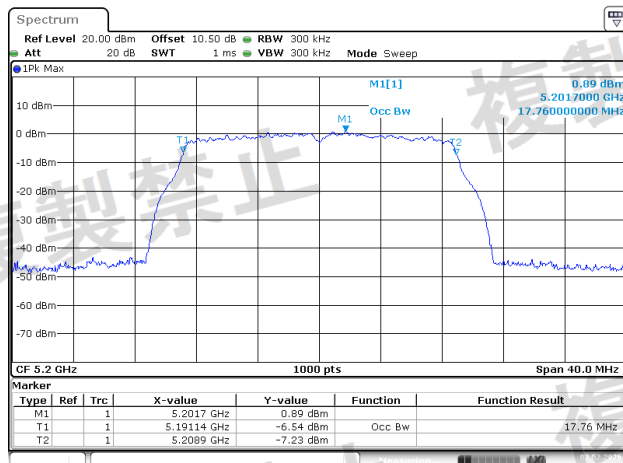


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 22:07:00

## 802.11ac20, High Channel

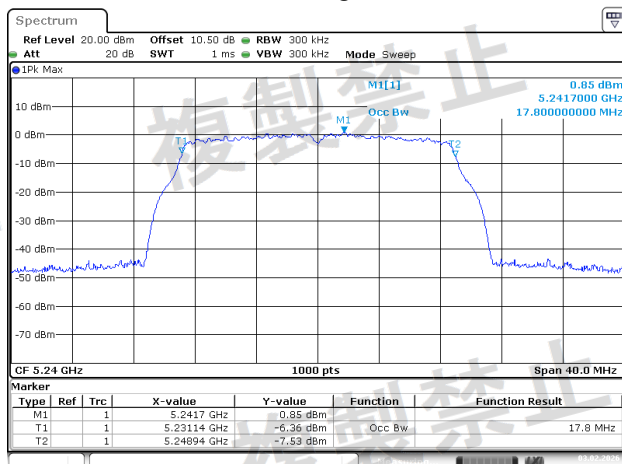


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 22:09:17

## 802.11ac40, Low Channel

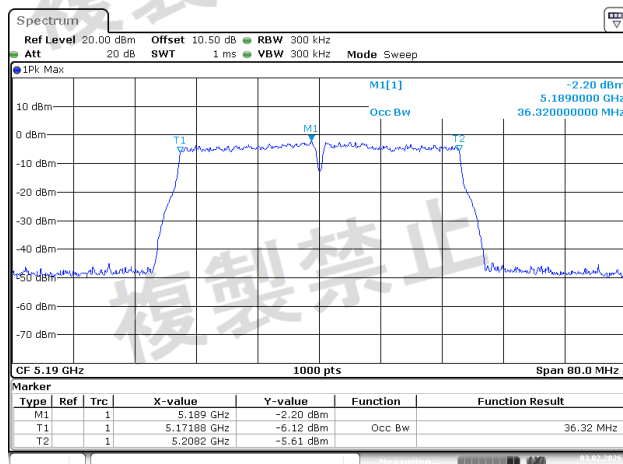


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 23:10:42

## 802.11ac40, High Channel

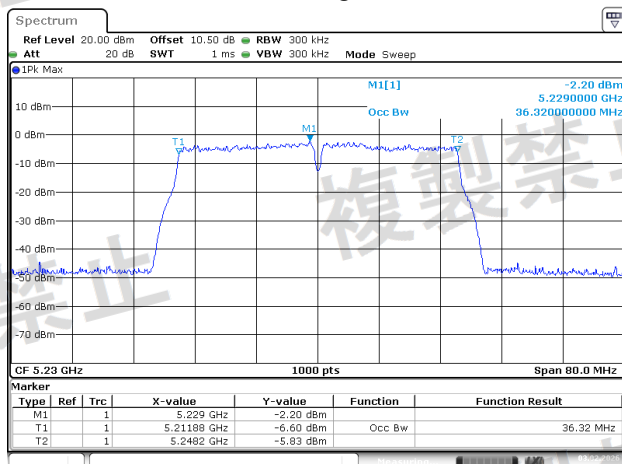


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 23:13:16

## 802.11ac80, Middle Channel

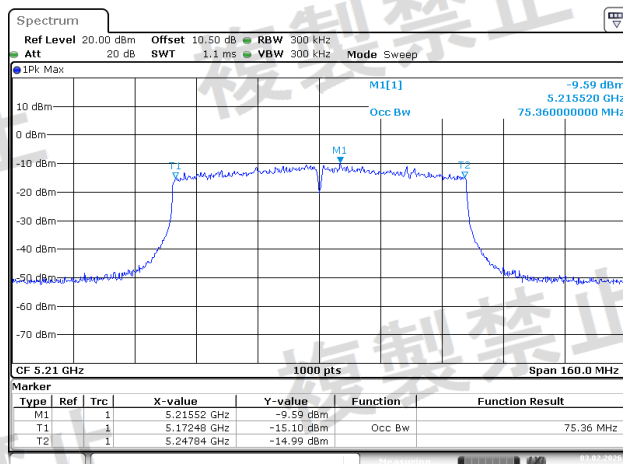


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 23:34:46

## 802.11ax20, Low Channel

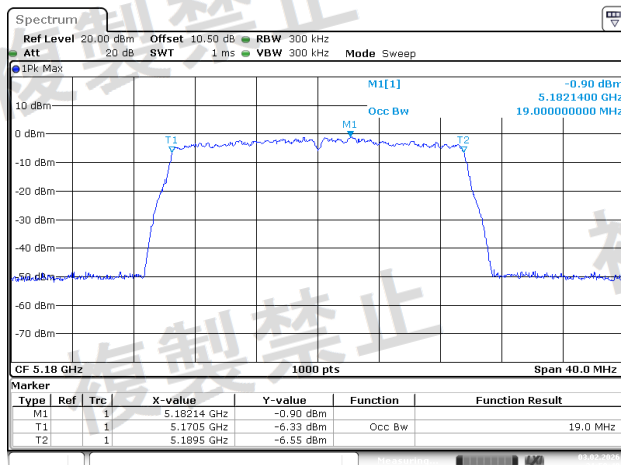


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 21:58:50

## 802.11ax20, Middle Channel

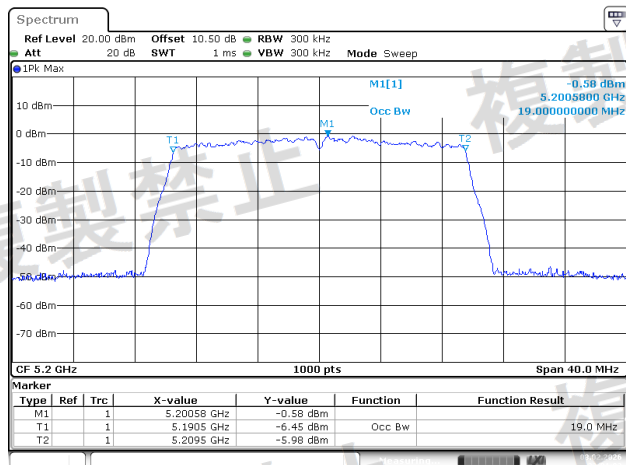


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 22:01:04

## 802.11ax20, High Channel

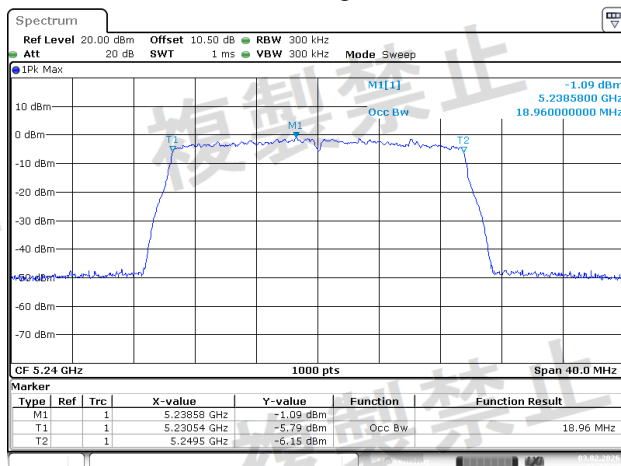


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 21:42:13

## 802.11ax40, Low Channel

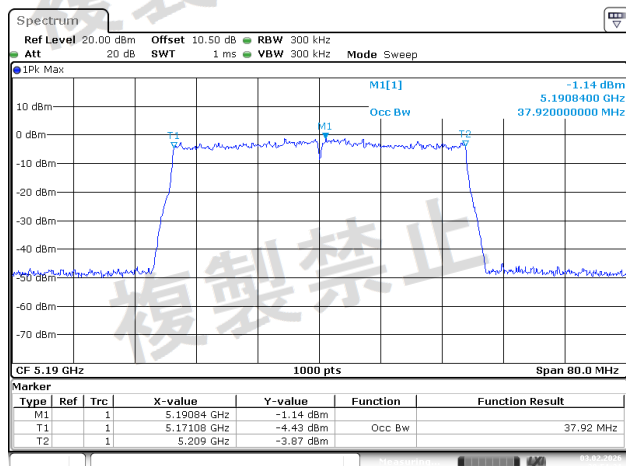


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 20:51:21

## 802.11ax40, High Channel

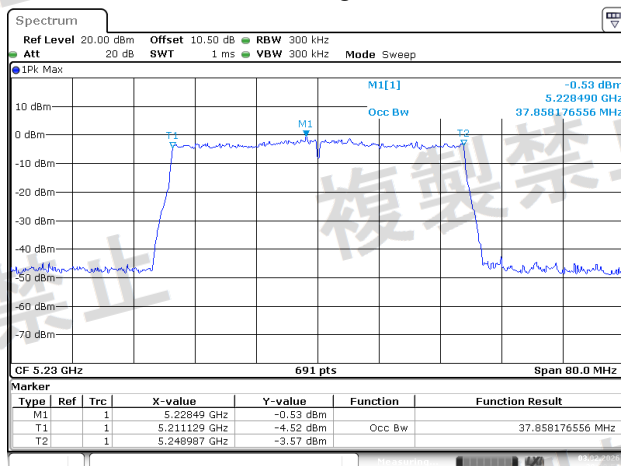

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 20:38:54


## 802.11ax80, Middle Channel

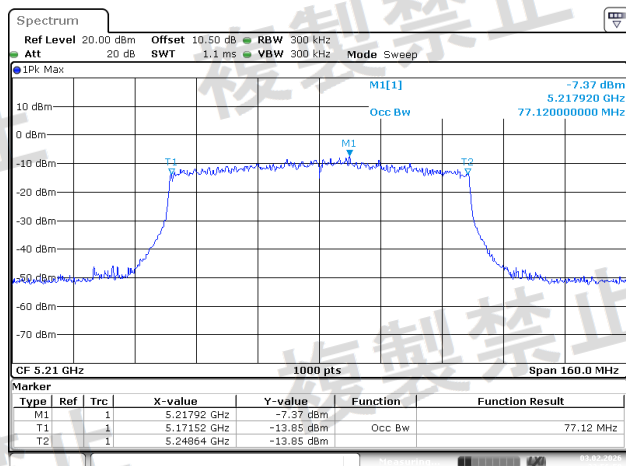


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 23:56:50

## W53, Chain 0, Test Condition: NV


## 802.11a, Low Channel

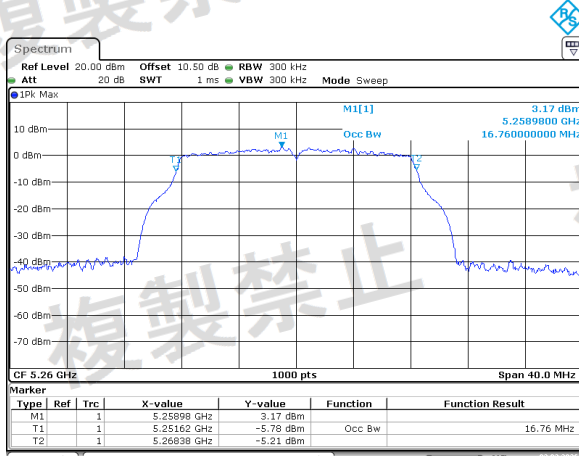


## 802.11a, Middle Channel

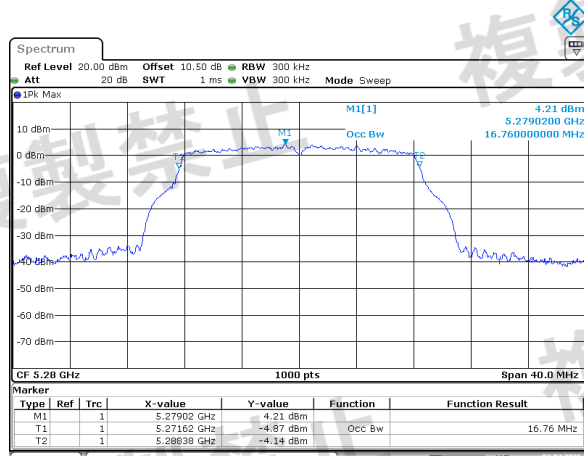


## 802.11a, High Channel

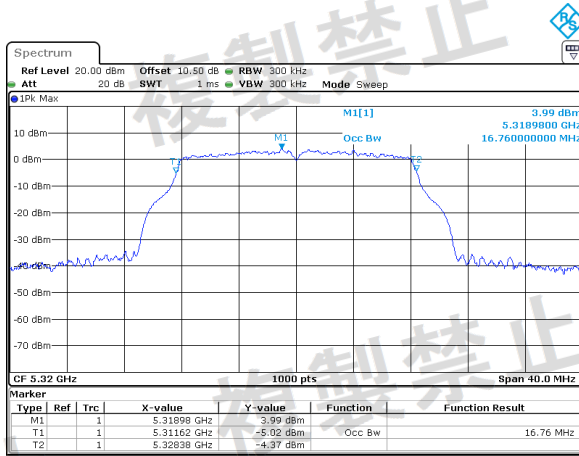


## 802.11ac20, Low Channel

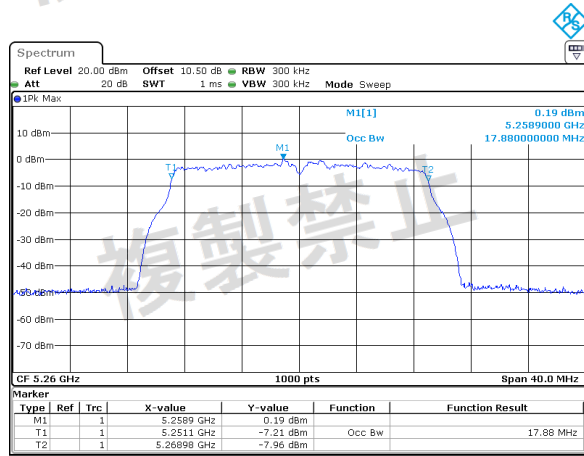


## 802.11ac20, Middle Channel

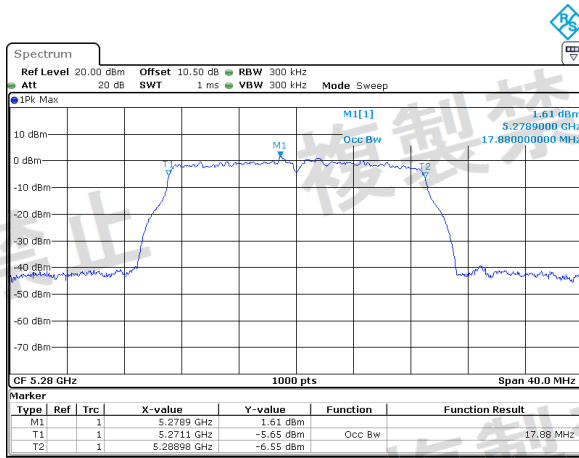


## 802.11ac20, High Channel

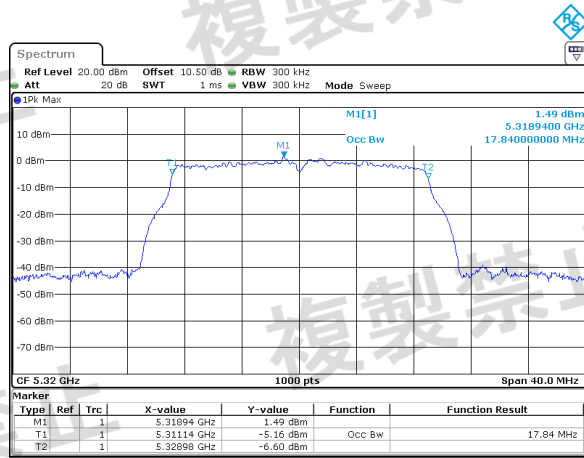


802.11ac40, Low Channel

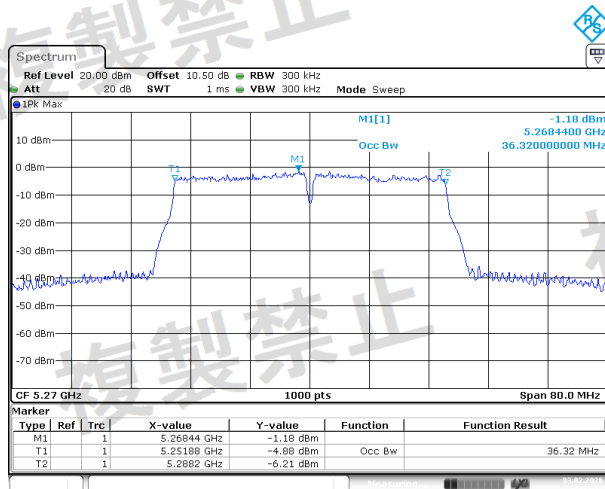


802.11ac40, High Channel

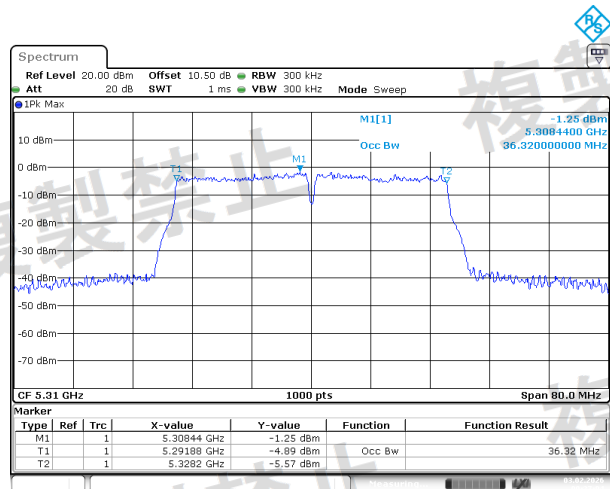


802.11ac80, Middle Channel

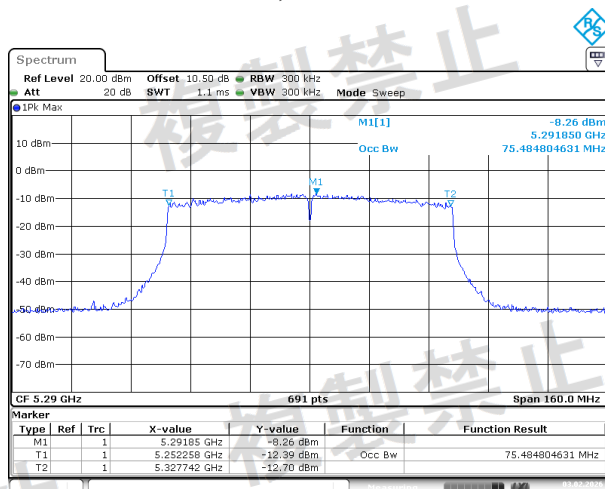


802.11ax20, Low Channel

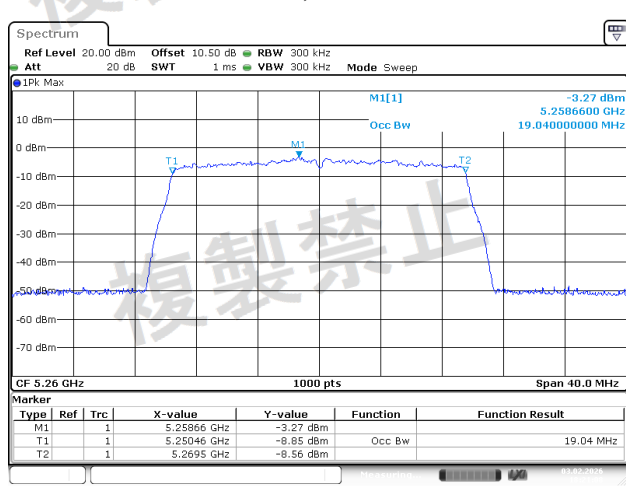


802.11ax20, Middle Channel

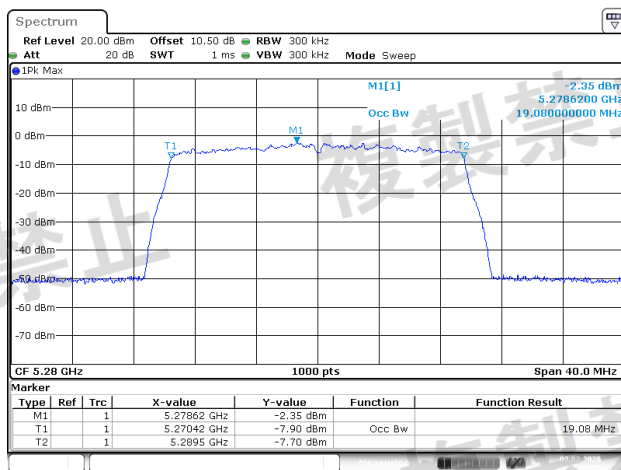

802.11ax20, High Channel

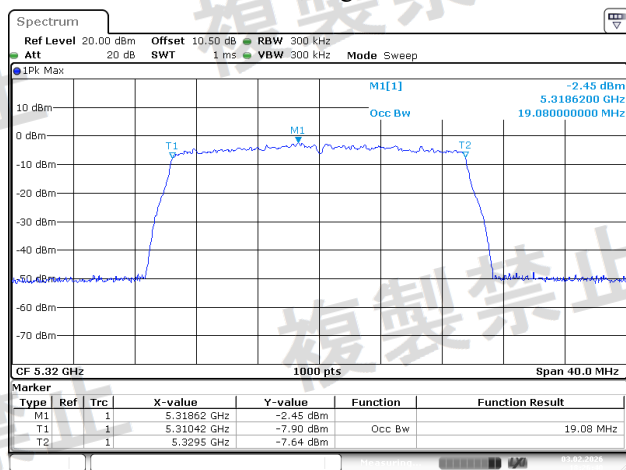


## 802.11ax40, Low Channel

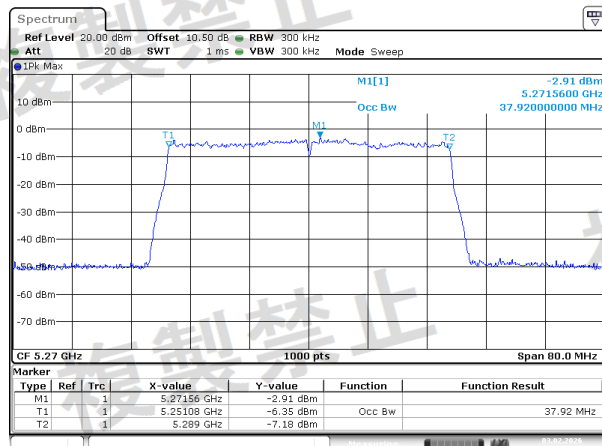

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 19:19:51


## 802.11ax40, High Channel

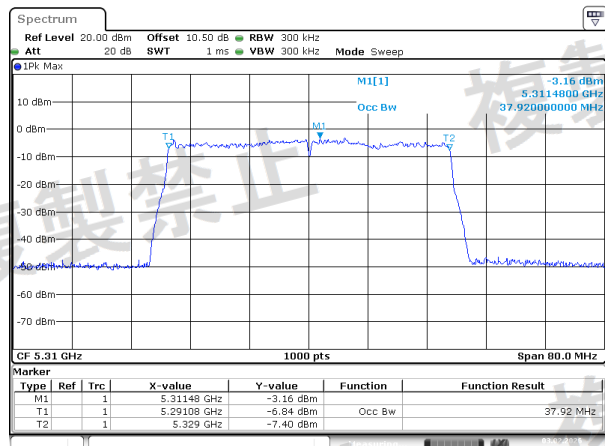

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 19:27:59


## W53, Chain 1, Test Condition: NV

## 802.11ax80, Middle Channel

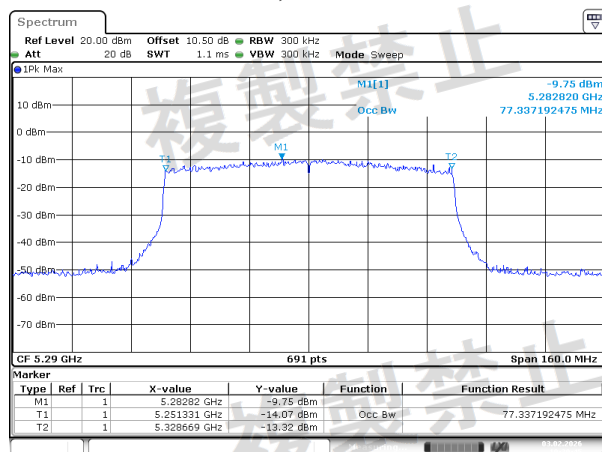


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 19:39:45

## 802.11a, Low Channel

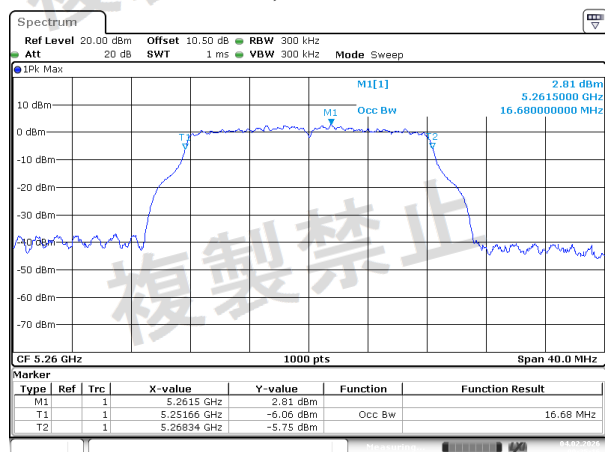


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 4.FEB.2026 00:35:16

## 802.11a, Middle Channel

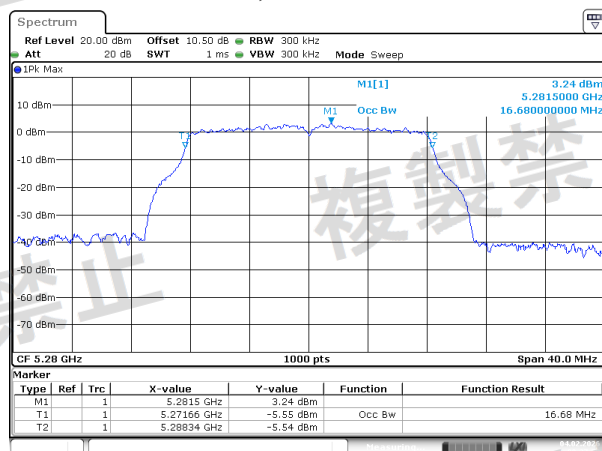


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 4.FEB.2026 00:37:58

## 802.11a, High Channel

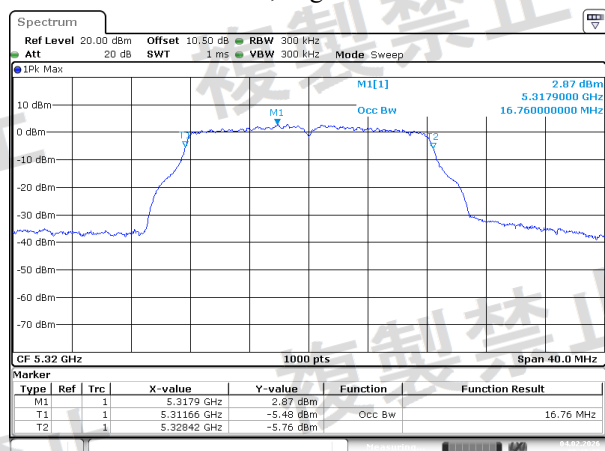


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 4.FEB.2026 00:40:11

## 802.11ac20, Low Channel

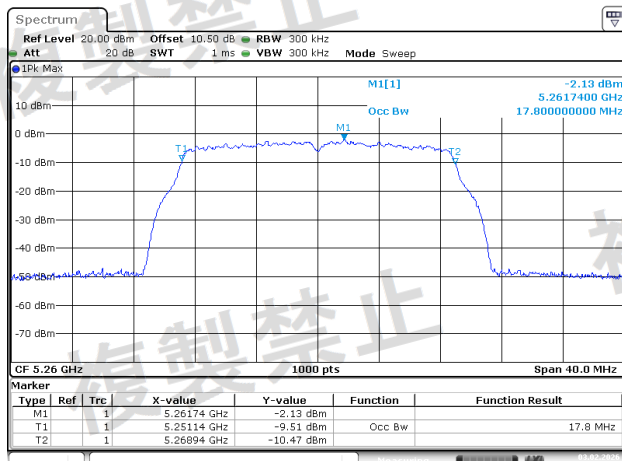


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 22:11:50

## 802.11ac20, Middle Channel

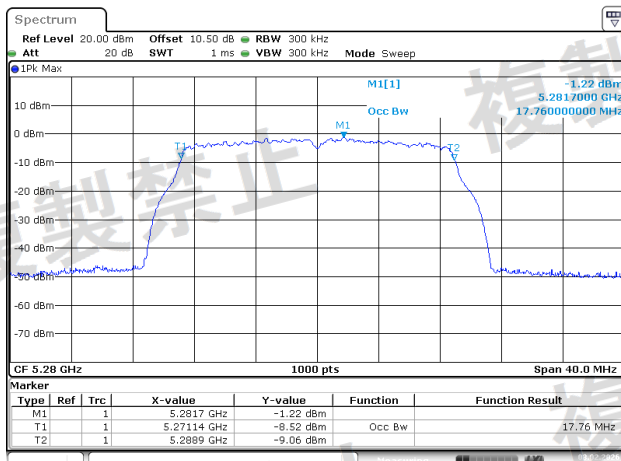


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 22:14:15

## 802.11ac20, High Channel

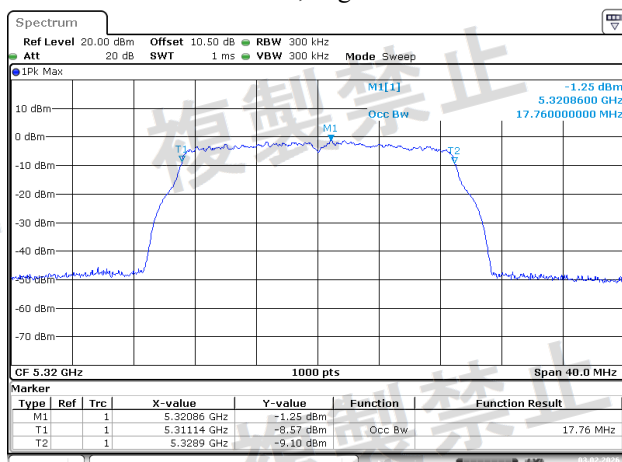


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 22:16:22

## 802.11ac40, Low Channel

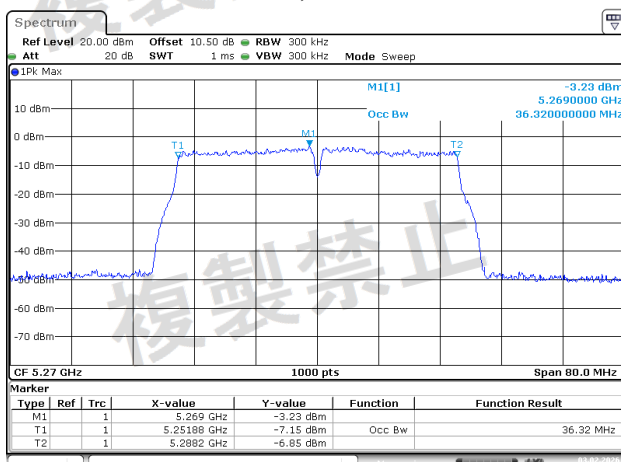


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 23:15:24

## 802.11ac40, High Channel

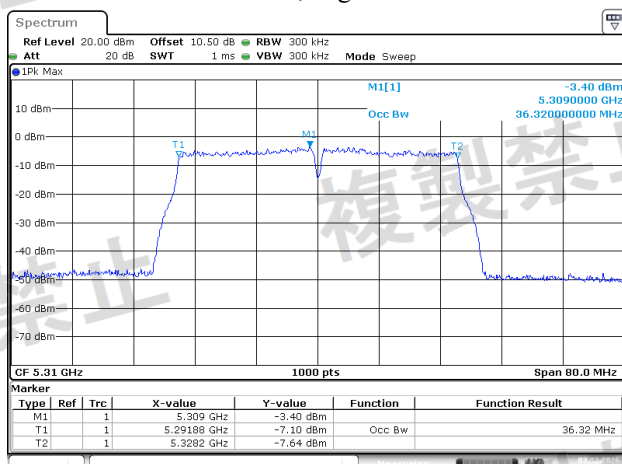


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 23:17:34

## 802.11ac80, Middle Channel

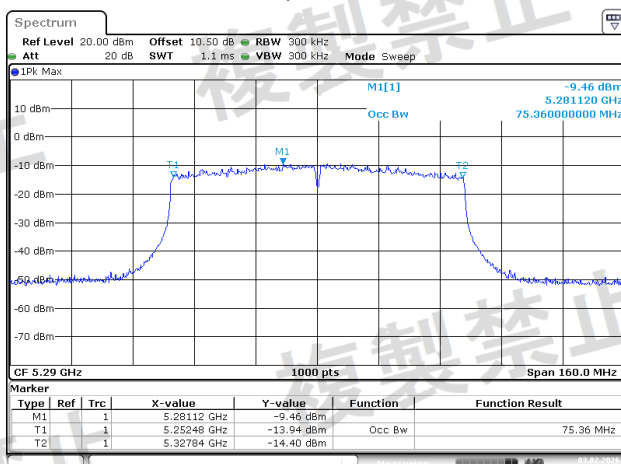


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 23:52:22

## 802.11ax20, Low Channel

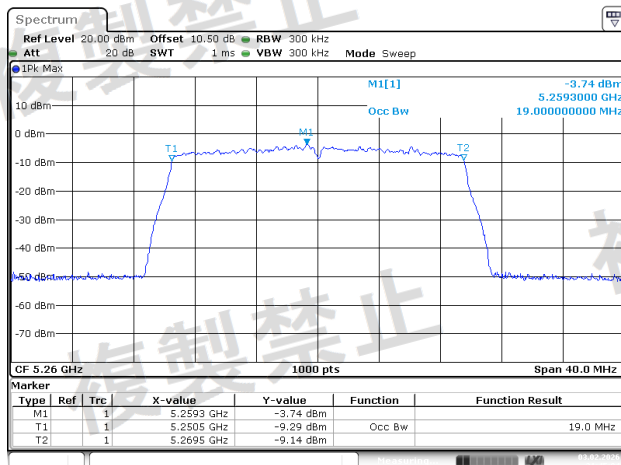


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 21:45:05

## 802.11ax20, Middle Channel

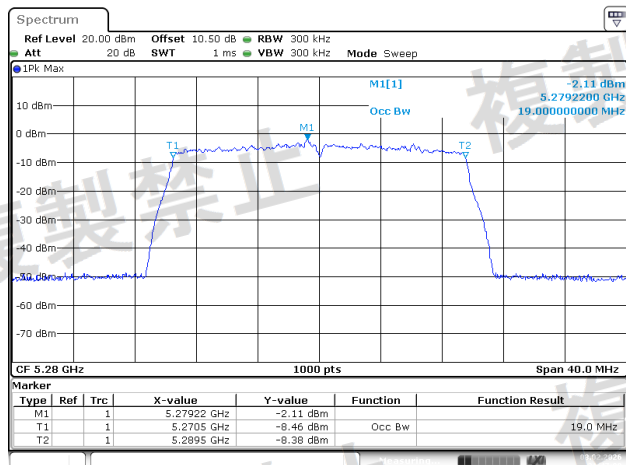


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 21:47:03

## 802.11ax20, High Channel

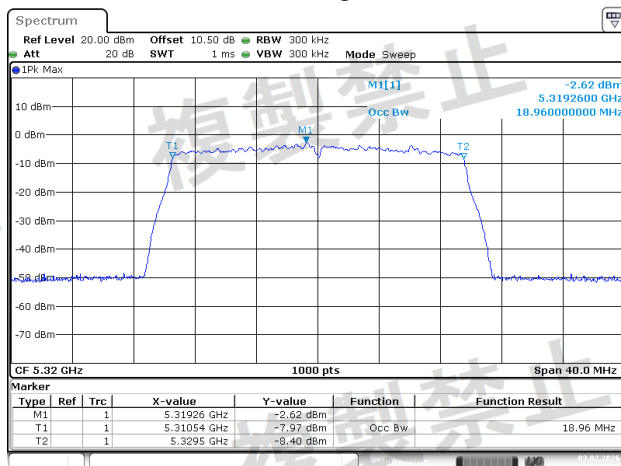


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 21:49:05

## 802.11ax40, Low Channel

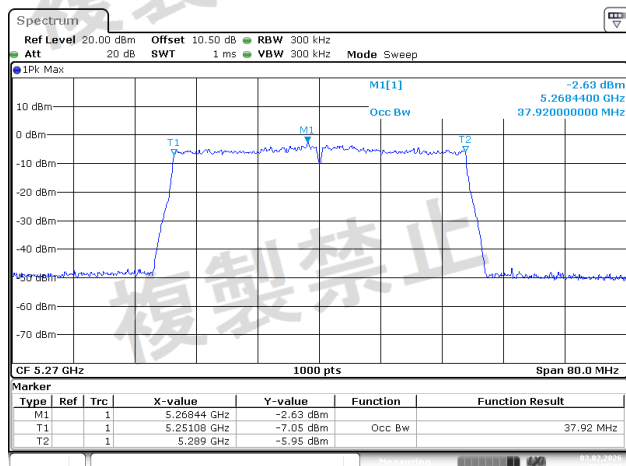


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 20:41:28

## 802.11ax40, High Channel

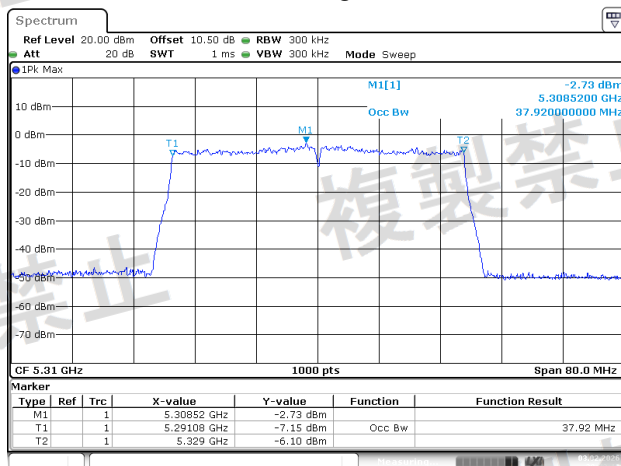

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 20:43:17


## 802.11ax80, Middle Channel

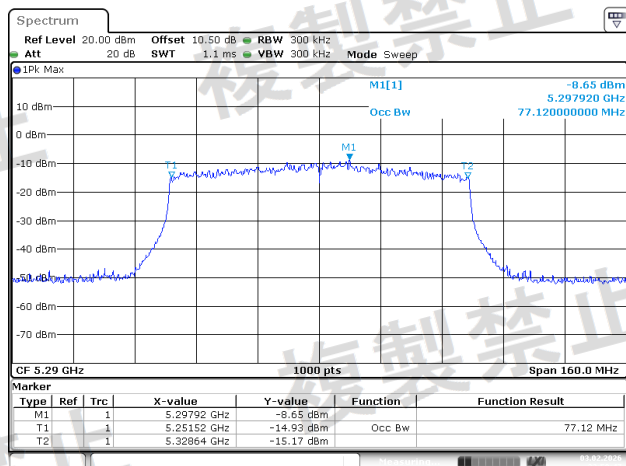


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 23:58:47

## W56, Chain 0, Test Condition: NV


## 802.11a, Low Channel

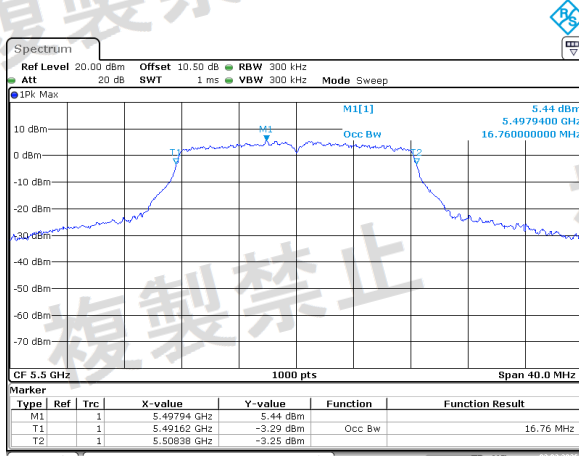


## 802.11a, Middle Channel

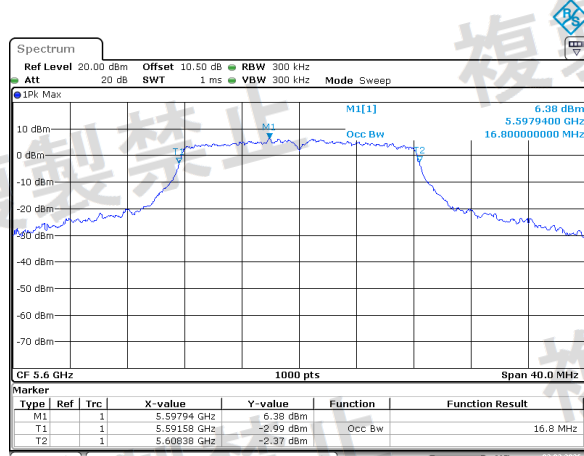


## 802.11a, High Channel

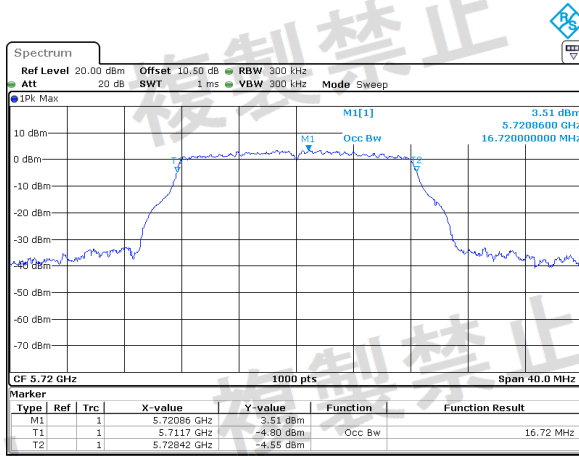


## 802.11ac20, Low Channel

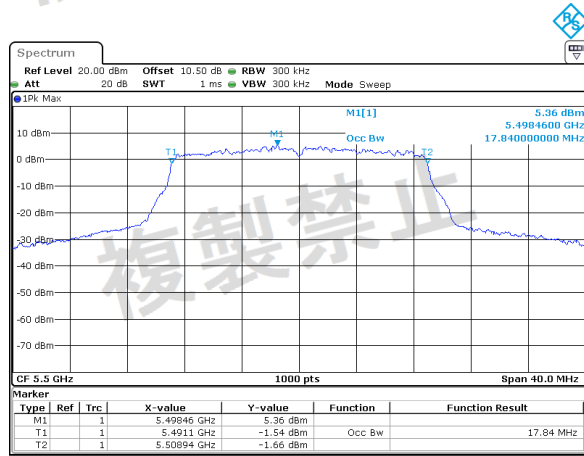


## 802.11ac20, Middle Channel

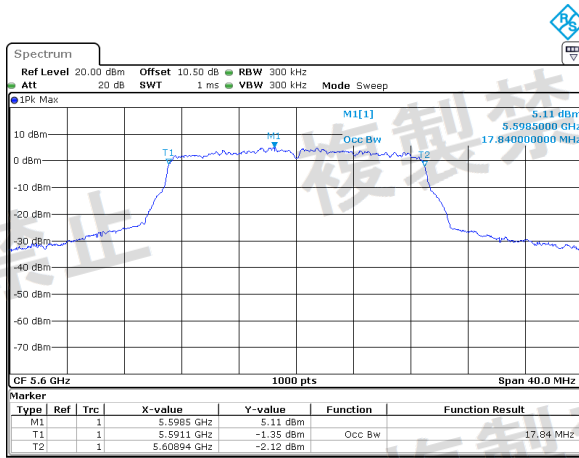


## 802.11ac20, High Channel

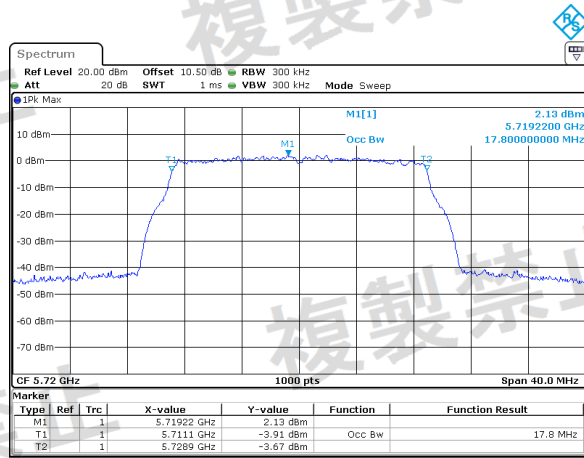


## 802.11ac40, Low Channel

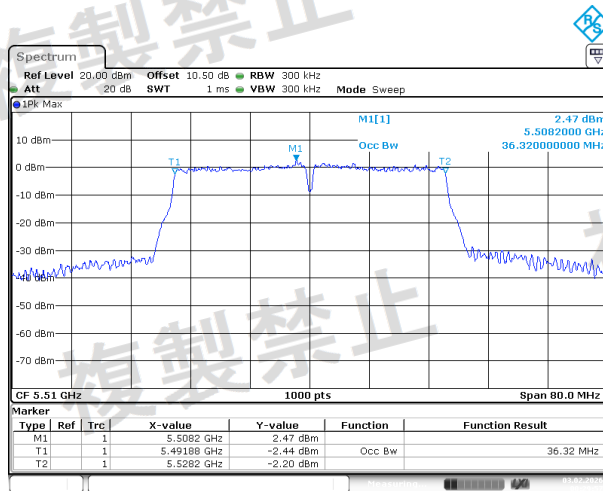


## 802.11ac40, Middle Channel

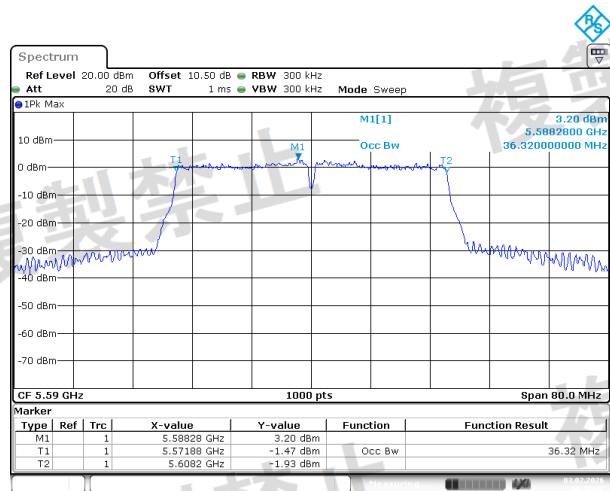


## 802.11ac40, High Channel

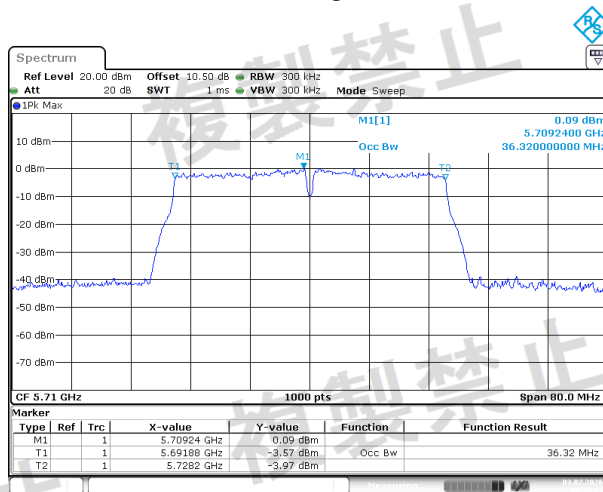


## 802.11ac80, Low Channel

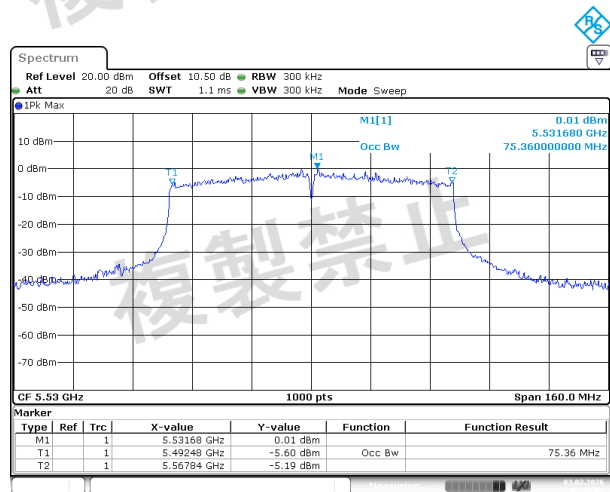


## 802.11ac80, Middle Channel

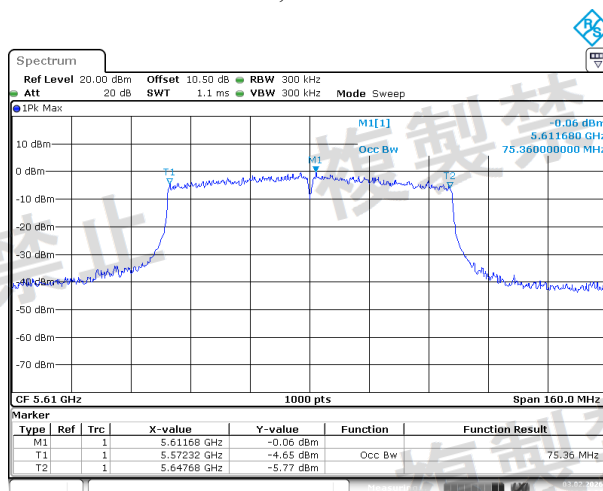

## 802.11ac80, High Channel

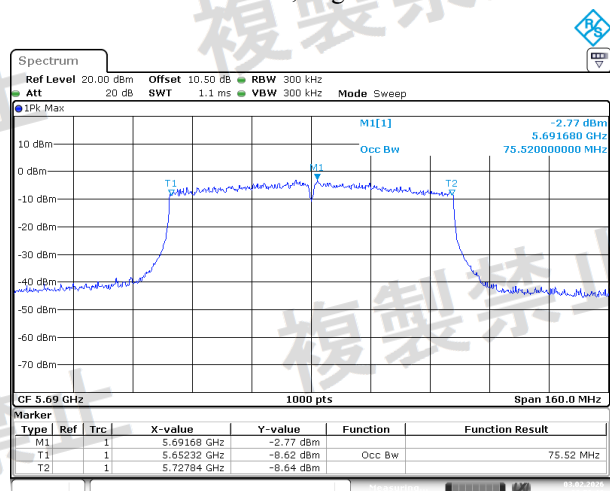


## 802.11ax20, Low Channel

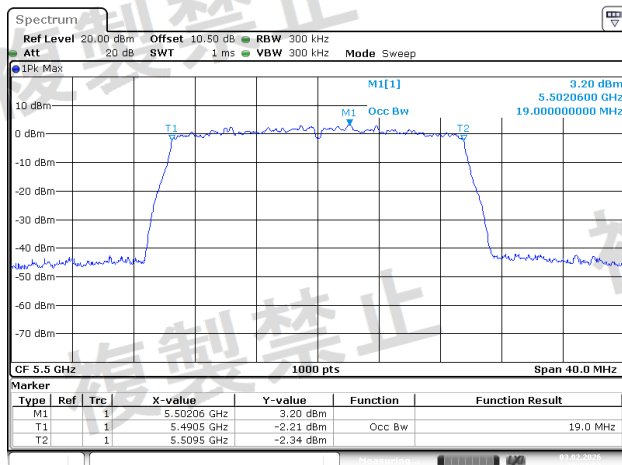


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 19:04:52

## 802.11ax20, Middle Channel

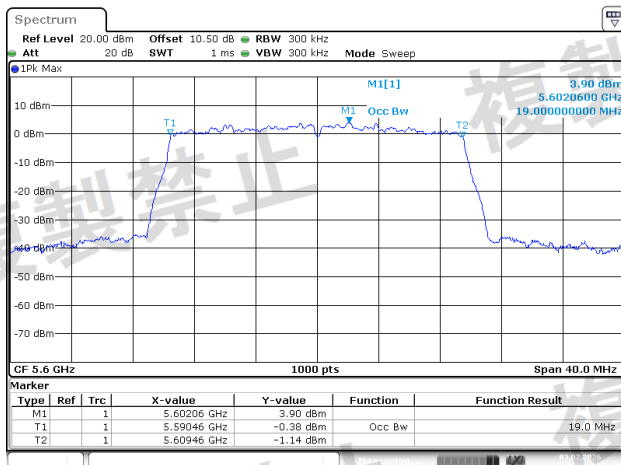


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 19:06:57

## 802.11ax20, High Channel

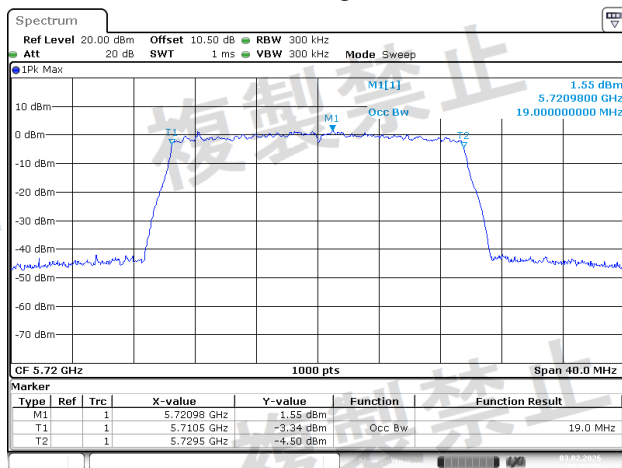


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 19:08:57

## 802.11ax40, Low Channel

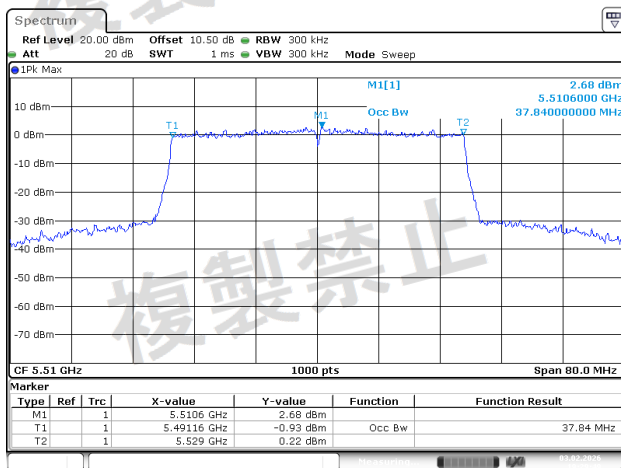


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 19:29:49

## 802.11ax40, Middle Channel

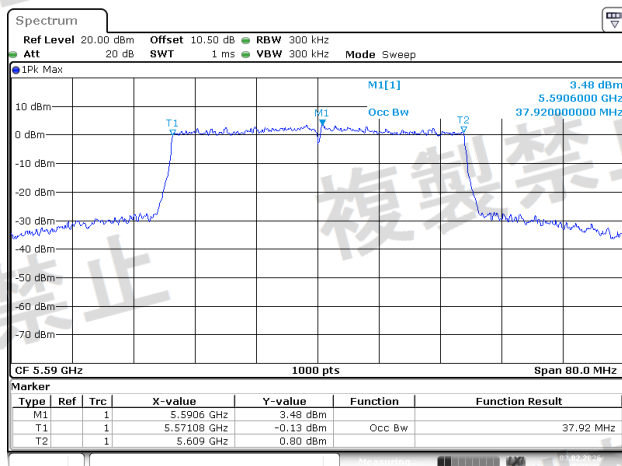


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 19:31:41

## 802.11ax40, High Channel

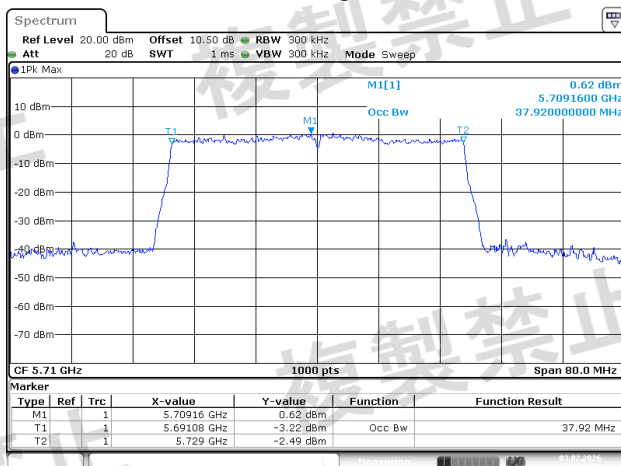


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 19:33:35

## 802.11ax80, Low Channel

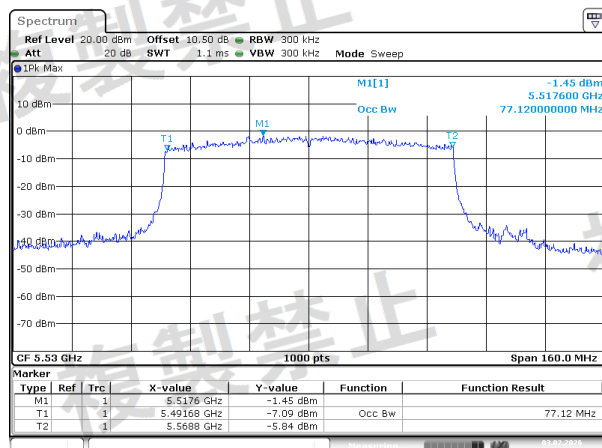

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 19:54:29


## 802.11ax80, Middle Channel

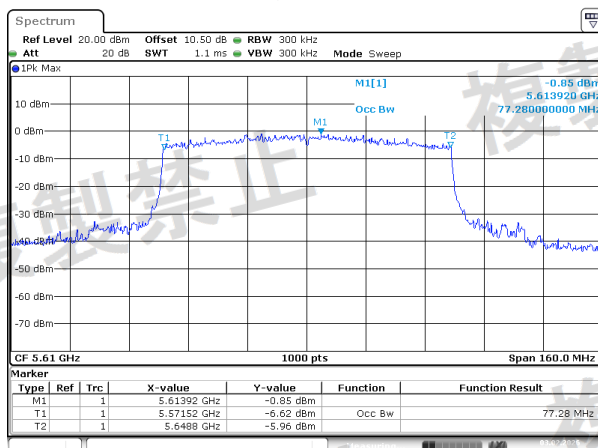

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 19:55:22


## W56, Chain 1, Test Condition: NV

## 802.11ax80, High Channel

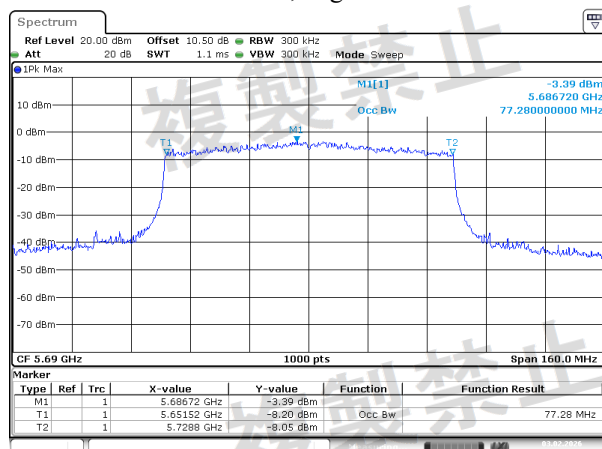


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 19:55:59

## 802.11a, Low Channel

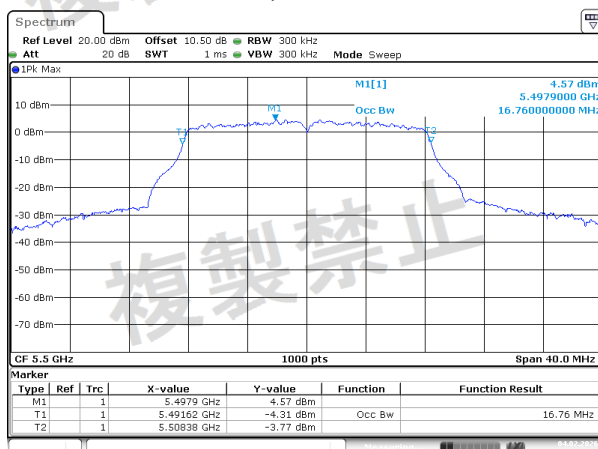


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 4.FEB.2026 00:42:39

## 802.11a, Middle Channel

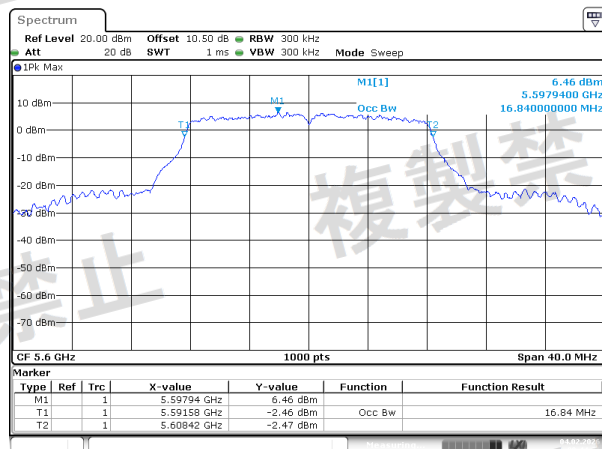


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 4.FEB.2026 00:44:22

## 802.11a, High Channel

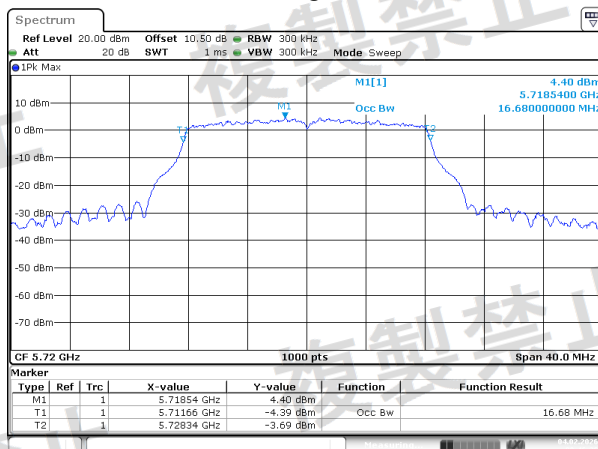


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 4.FEB.2026 00:46:26

## 802.11ac20, Low Channel

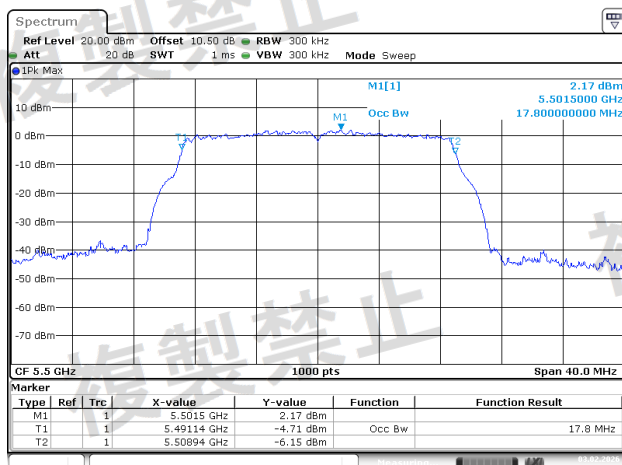


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 22:18:43

## 802.11ac20, Middle Channel

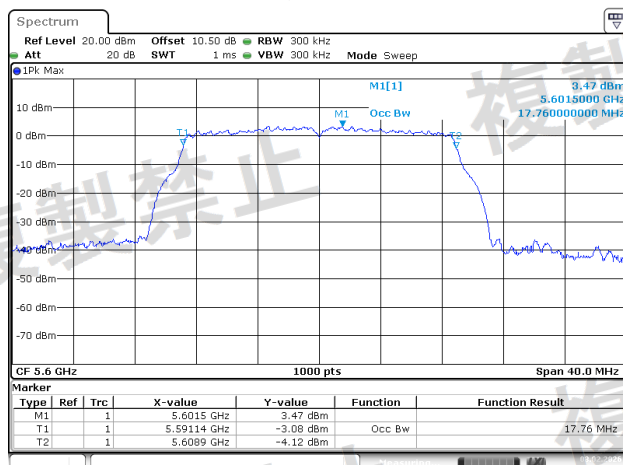


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 22:19:53

## 802.11ac20, High Channel

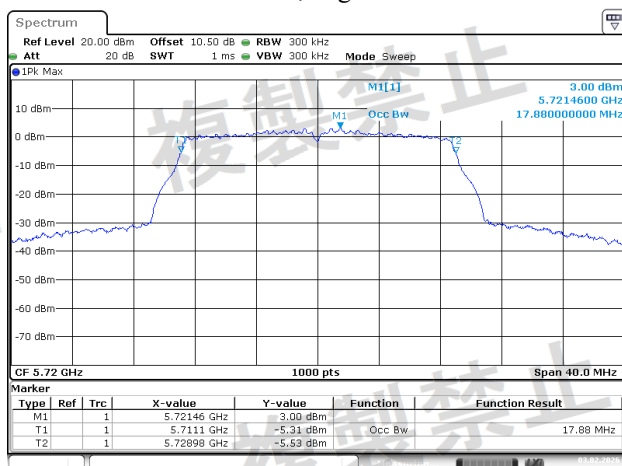


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 22:22:55

## 802.11ac40, Low Channel

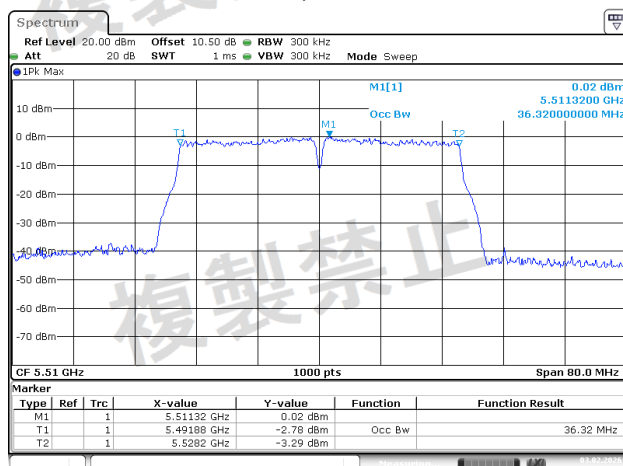


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 23:20:11

## 802.11ac40, Middle Channel

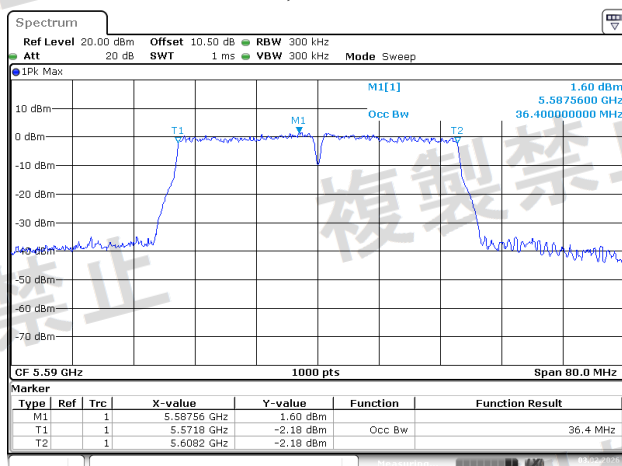


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 23:22:33

## 802.11ac40, High Channel

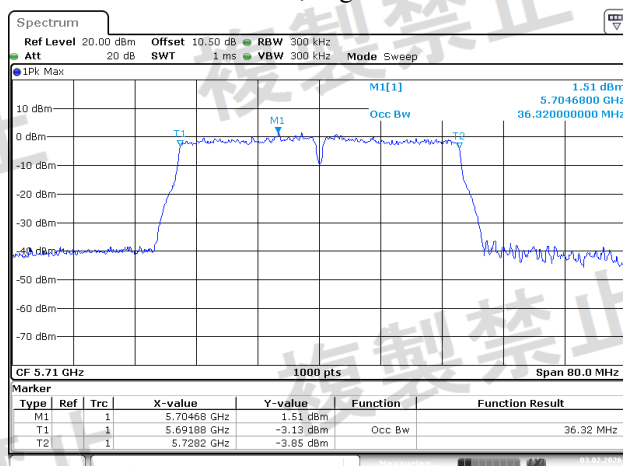


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 23:26:17

## 802.11ac80, Low Channel

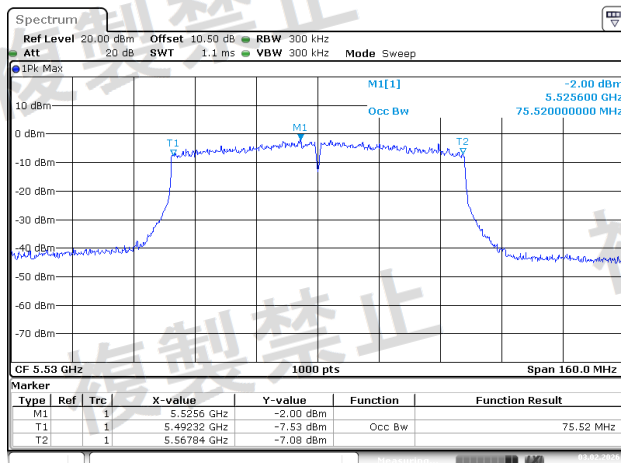


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 23:45:53

## 802.11ac80, Middle Channel

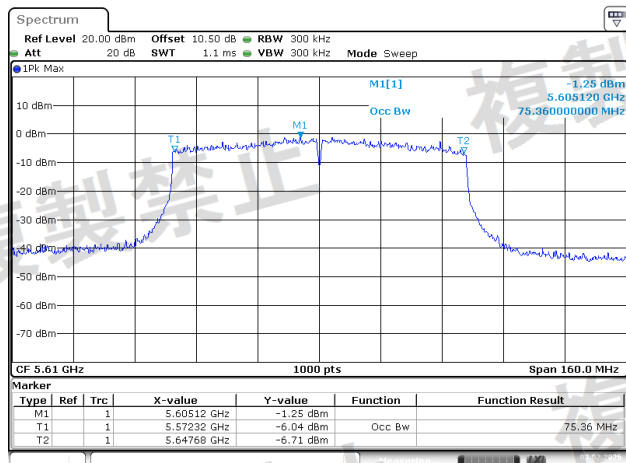


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 23:48:07

## 802.11ac80, High Channel

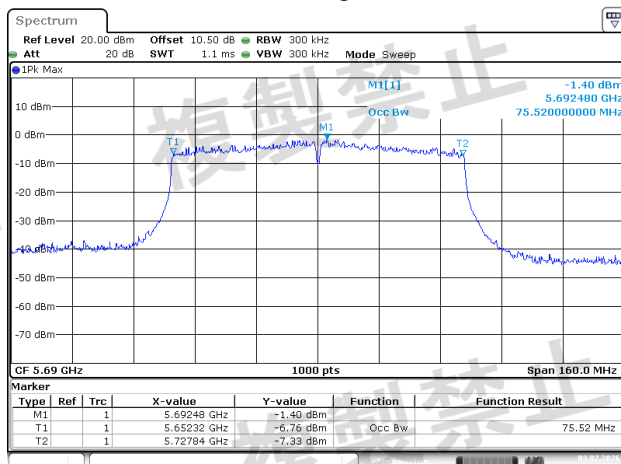


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 23:49:47

## 802.11ax20, Low Channel

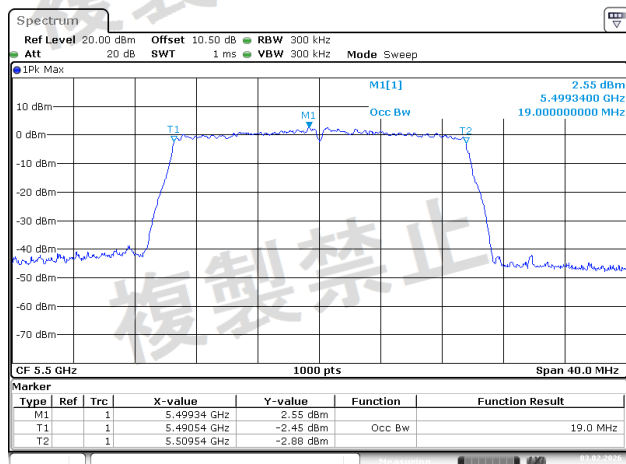


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 21:51:13

## 802.11ax20, Middle Channel

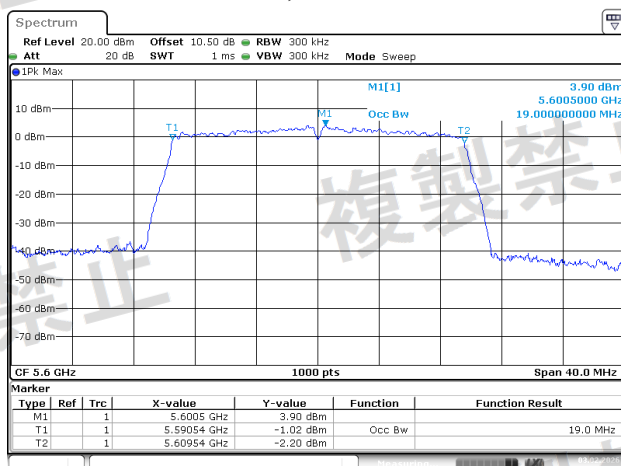


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 21:53:05

## 802.11ax20, High Channel

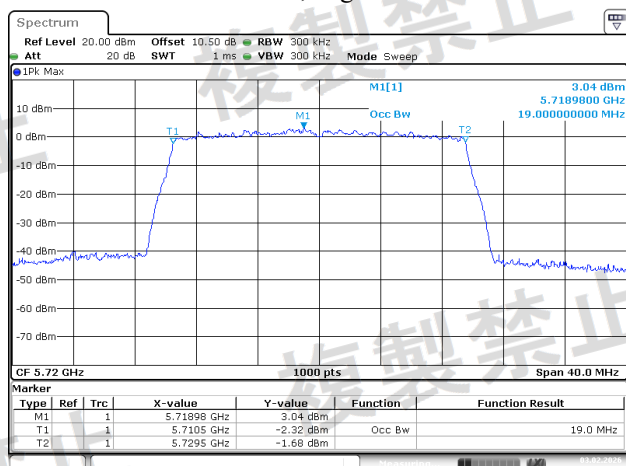


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 21:54:41

## 802.11ax40, Low Channel

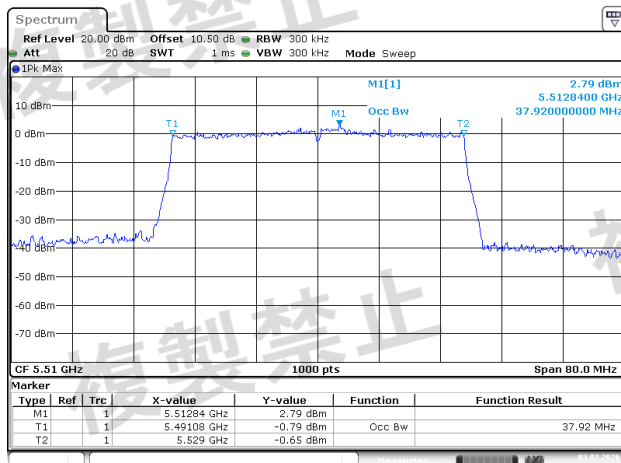


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 20:45:08

## 802.11ax40, Middle Channel

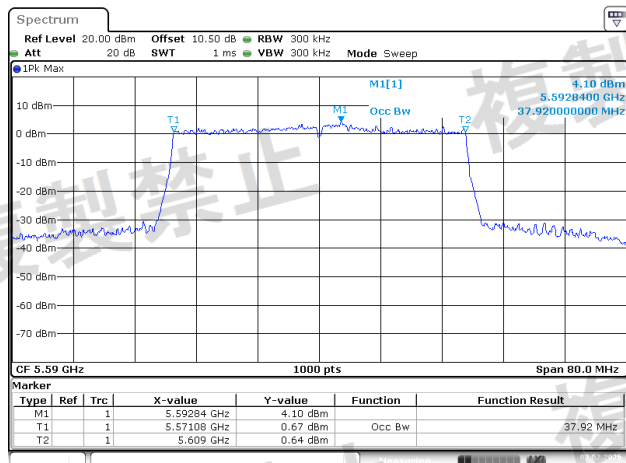


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 20:47:35

## 802.11ax40, High Channel

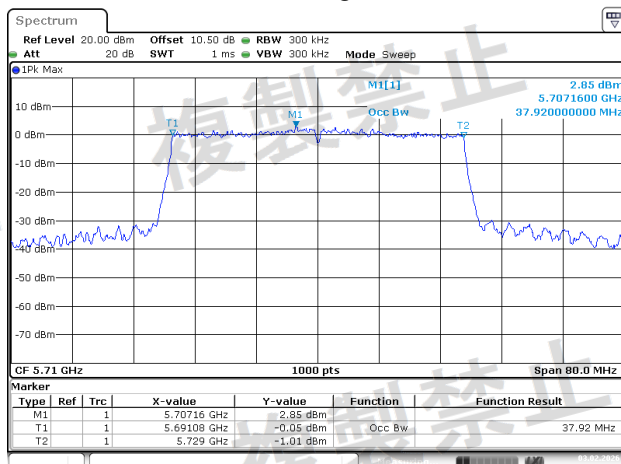


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 20:49:33

## 802.11ax80, Low Channel

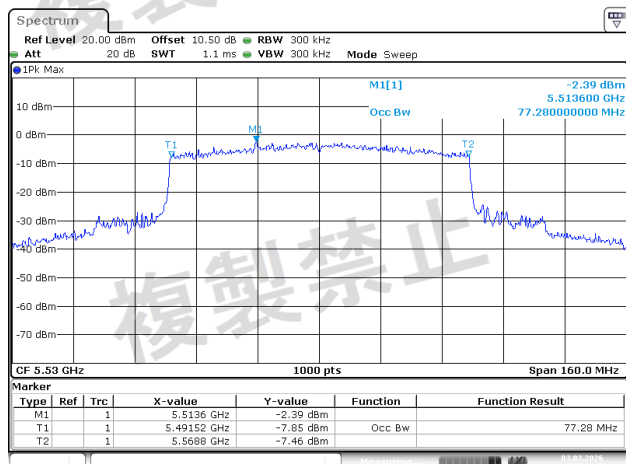


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 19:59:11

## 802.11ax80, Middle Channel

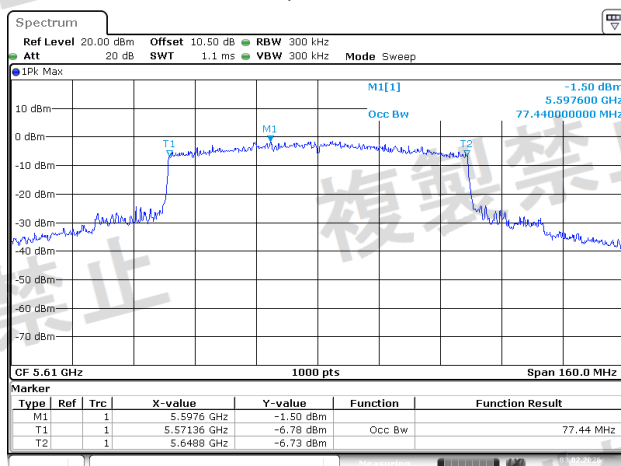

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 20:05:19

## 802.11ax80, High Channel

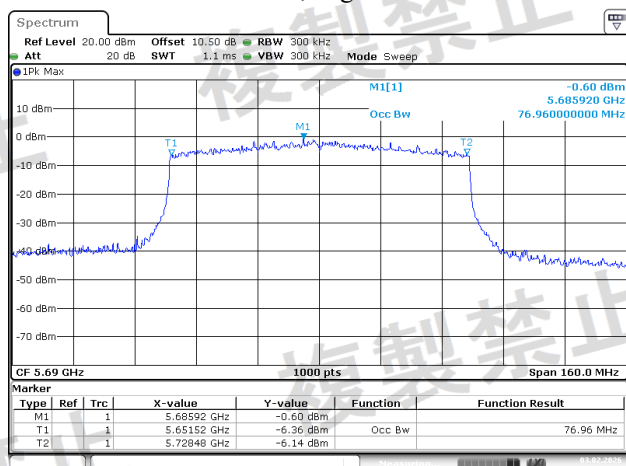

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 20:34:02

**Transmitter Spurious Emission Strength****Test Information:**

|             |             |              |                       |
|-------------|-------------|--------------|-----------------------|
| Serial No.: | 3FUD-2      | Test Date:   | 2026/02/02~2026/03/18 |
| Test Site:  | RF          | Test Mode:   | Transmitting          |
| Tester:     | Cheeb Huang | Test Result: | Pass                  |

**Environmental Conditions:**

|                      |           |                              |       |                        |             |
|----------------------|-----------|------------------------------|-------|------------------------|-------------|
| Temperature:<br>(°C) | 23.6~24.8 | Relative<br>Humidity:<br>(%) | 50~60 | ATM Pressure:<br>(kPa) | 101.5~101.9 |
|----------------------|-----------|------------------------------|-------|------------------------|-------------|

Note:

For 802.11a, Offset<sub>Chain0 or Chain1</sub> = Antenna gain +10dB Attenuator + Cable 1 loss (0.5dB)

For 802.11ac/ax,

Others Offset<sub>Chain0 or Chain1</sub> = Antenna gain +10dB Attenuator + Cable 1 loss (0.5dB)Mask Offset<sub>Chain0 or Chain1</sub> = Maximum antenna gain {Chain0, Chain1} +10dB Attenuator + Cable 1 loss (0.5dB)Mask Offset<sub>Chain0+Chain1</sub> = Maximum antenna gain {Chain0, Chain1} +10dB Attenuator + Power divider loss (6dB)  
+ Cable 1 loss (0.5dB) + Cable 2 loss (1dB)

**Test Condition: NV****5.2G, Chain 0, 802.11a**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5100      | 5028.89                      | -41.09               | 0.078                    | 2.50                    | Pass    |
|         | 5100            | 5142      | 5141.38                      | -34.45               | 0.359                    | 2.50                    | Pass    |
|         | 5142            | 5150      | 5146.77                      | -31.21               | 0.757                    | 15                      | Pass    |
|         | 5250            | 5251      | 5250.99                      | -37.97               | 0.160                    | 102.33                  | Pass    |
|         | 5251            | 5260      | 5259.64                      | -38.07               | 0.156                    | 17.06                   | Pass    |
|         | 5260            | 5266.7    | 5265.16                      | -36.94               | 0.202                    | 3.81                    | Pass    |
|         | 5266.7          | 5300      | 5295.56                      | -37.10               | 0.195                    | 2.50                    | Pass    |
|         | 5300            | 26000     | 15998.3                      | -38.87               | 0.130                    | 2.50                    | Pass    |
| Middle  | 30              | 5100      | 1959.01                      | -34.18               | 0.382                    | 2.50                    | Pass    |
|         | 5100            | 5142      | 5134.20                      | -36.48               | 0.225                    | 2.50                    | Pass    |
|         | 5142            | 5150      | 5142.68                      | -35.98               | 0.252                    | 15                      | Pass    |
|         | 5250            | 5251      | 5250.95                      | -37.76               | 0.167                    | 112.20                  | Pass    |
|         | 5251            | 5260      | 5259.13                      | -37.75               | 0.168                    | 18.94                   | Pass    |
|         | 5260            | 5266.7    | 5266.05                      | -36.77               | 0.210                    | 2.98                    | Pass    |
|         | 5266.7          | 5300      | 5276.52                      | -37.40               | 0.182                    | 2.50                    | Pass    |
|         | 5300            | 26000     | 16452.6                      | -39.11               | 0.123                    | 2.50                    | Pass    |
| High    | 30              | 5100      | 1959.01                      | -37.53               | 0.177                    | 2.50                    | Pass    |
|         | 5100            | 5142      | 5107.72                      | -37.10               | 0.195                    | 2.50                    | Pass    |
|         | 5142            | 5150      | 5144.09                      | -36.08               | 0.247                    | 15                      | Pass    |
|         | 5250            | 5251      | 5250.50                      | -13.80               | 41.687                   | 316.23                  | Pass    |
|         | 5251            | 5260      | 5251.00                      | -20.65               | 8.610                    | 100.00                  | Pass    |
|         | 5260            | 5266.7    | 5265.31                      | -33.49               | 0.448                    | 3.65                    | Pass    |
|         | 5266.7          | 5300      | 5267.96                      | -36.25               | 0.237                    | 2.50                    | Pass    |
|         | 5300            | 26000     | 15688.8                      | -38.84               | 0.131                    | 2.50                    | Pass    |

**5.2G, Chain 0, 802.11ac20**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5100      | 5001.52                      | -40.66               | 0.086                    | 2.50                    | Pass    |
|         | 5100            | 5142      | 5129.68                      | -39.66               | 0.108                    | 2.50                    | Pass    |
|         | 5142            | 5150      | 5144.05                      | -39.49               | 0.112                    | 15                      | Pass    |
|         | 5250            | 5251      | 5250.96                      | -40.50               | 0.089                    | 109.65                  | Pass    |
|         | 5251            | 5260      | 5259.68                      | -41.24               | 0.075                    | 16.92                   | Pass    |
|         | 5260            | 5266.7    | 5266.54                      | -40.85               | 0.082                    | 2.60                    | Pass    |
|         | 5266.7          | 5300      | 5295.65                      | -39.17               | 0.121                    | 2.50                    | Pass    |
|         | 5300            | 26000     | 6993.8                       | -38.65               | 0.136                    | 2.50                    | Pass    |
| Middle  | 30              | 5100      | 3410.8                       | -37.91               | 0.162                    | 2.50                    | Pass    |
|         | 5100            | 5142      | 5127.44                      | -39.98               | 0.100                    | 2.50                    | Pass    |
|         | 5142            | 5150      | 5148.35                      | -39.11               | 0.123                    | 15                      | Pass    |
|         | 5250            | 5251      | 5250.88                      | -39.50               | 0.112                    | 131.83                  | Pass    |
|         | 5251            | 5260      | 5259.82                      | -41.05               | 0.079                    | 16.44                   | Pass    |
|         | 5260            | 5266.7    | 5266.52                      | -41.65               | 0.068                    | 2.62                    | Pass    |
|         | 5266.7          | 5300      | 5285.44                      | -40.02               | 0.100                    | 2.50                    | Pass    |
|         | 5300            | 26000     | 17751.6                      | -38.70               | 0.135                    | 2.50                    | Pass    |
| High    | 30              | 5100      | 5076.8                       | -40.98               | 0.080                    | 2.50                    | Pass    |
|         | 5100            | 5142      | 5104.08                      | -40.22               | 0.095                    | 2.50                    | Pass    |
|         | 5142            | 5150      | 5145.16                      | -39.83               | 0.104                    | 15                      | Pass    |
|         | 5250            | 5251      | 5250.37                      | -10.29               | 93.541                   | 426.58                  | Pass    |
|         | 5251            | 5260      | 5251.05                      | -19.26               | 11.858                   | 98.98                   | Pass    |
|         | 5260            | 5266.7    | 5266.59                      | -40.29               | 0.094                    | 2.57                    | Pass    |
|         | 5266.7          | 5300      | 5278.53                      | -39.78               | 0.105                    | 2.50                    | Pass    |
|         | 5300            | 26000     | 19885.7                      | -38.49               | 0.142                    | 2.50                    | Pass    |

**5.2G, Chain 0, 802.11ac40**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5100      | 5095.31                      | -37.47               | 0.179                    | 2.50                    | Pass    |
|         | 5100            | 5141.6    | 5141.37                      | -34.62               | 0.345                    | 2.50                    | Pass    |
|         | 5141.6          | 5150      | 5149.64                      | -30.57               | 0.877                    | 15                      | Pass    |
|         | 5250            | 5251      | 5251.00                      | -37.70               | 0.170                    | 50.00                   | Pass    |
|         | 5251            | 5270      | 5269.75                      | -41.39               | 0.073                    | 8.12                    | Pass    |
|         | 5270            | 5278.4    | 5277.90                      | -41.52               | 0.070                    | 2.66                    | Pass    |
|         | 5278.4          | 5300      | 5297.25                      | -41.56               | 0.070                    | 2.50                    | Pass    |
|         | 5300            | 26000     | 15914.4                      | -38.24               | 0.150                    | 2.50                    | Pass    |
| High    | 30              | 5100      | 5082.38                      | -38.50               | 0.141                    | 2.50                    | Pass    |
|         | 5100            | 5141.6    | 5137.50                      | -41.56               | 0.070                    | 2.50                    | Pass    |
|         | 5141.6          | 5150      | 5145.59                      | -40.50               | 0.089                    | 15                      | Pass    |
|         | 5250            | 5251      | 5250.71                      | -16.83               | 20.749                   | 97.49                   | Pass    |
|         | 5251            | 5270      | 5251.00                      | -20.47               | 8.974                    | 50.00                   | Pass    |
|         | 5270            | 5278.4    | 5278.14                      | -33.44               | 0.453                    | 2.57                    | Pass    |
|         | 5278.4          | 5300      | 5278.45                      | -34.11               | 0.388                    | 2.50                    | Pass    |
|         | 5300            | 26000     | 5306.7                       | -35.37               | 0.290                    | 2.50                    | Pass    |

**5.2G, Chain 0, 802.11ac80**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Middle  | 30              | 5100      | 4434.94                      | -42.36               | 0.058                    | 2.50                    | Pass    |
|         | 5100            | 5123.2    | 5100.48                      | -41.54               | 0.070                    | 2.50                    | Pass    |
|         | 5123.2          | 5150      | 5149.64                      | -38.04               | 0.157                    | 15                      | Pass    |
|         | 5250            | 5251      | 5250.99                      | -24.09               | 3.899                    | 25.58                   | Pass    |
|         | 5251            | 5290      | 5251.06                      | -24.68               | 3.404                    | 24.93                   | Pass    |
|         | 5290            | 5296.7    | 5296.45                      | -41.80               | 0.066                    | 2.54                    | Pass    |
|         | 5296.7          | 5350      | 5323.86                      | -41.17               | 0.076                    | 2.50                    | Pass    |
|         | 5350            | 26000     | 17710.6                      | -38.95               | 0.127                    | 2.50                    | Pass    |

**5.2G, Chain 0, 802.11ax20**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5100      | 5096.32                      | -40.58               | 0.087                    | 2.50                    | Pass    |
|         | 5100            | 5142      | 5140.47                      | -41.91               | 0.064                    | 2.50                    | Pass    |
|         | 5142            | 5150      | 5148.28                      | -40.01               | 0.100                    | 15                      | Pass    |
|         | 5250            | 5250.2    | 5250.20                      | -42.01               | 0.063                    | 630.96                  | Pass    |
|         | 5250.2          | 5251      | 5250.99                      | -41.97               | 0.064                    | 102.33                  | Pass    |
|         | 5251            | 5260      | 5259.01                      | -41.49               | 0.071                    | 19.41                   | Pass    |
|         | 5260            | 5266.7    | 5265.76                      | -42.36               | 0.058                    | 3.23                    | Pass    |
|         | 5266.7          | 5300      | 5290.46                      | -41.81               | 0.066                    | 2.50                    | Pass    |
|         | 5300            | 26000     | 19877.5                      | -38.83               | 0.131                    | 2.50                    | Pass    |
| Middle  | 30              | 5100      | 5037.77                      | -40.56               | 0.088                    | 2.50                    | Pass    |
|         | 5100            | 5142      | 5138.03                      | -41.81               | 0.066                    | 2.50                    | Pass    |
|         | 5142            | 5150      | 5149.52                      | -41.31               | 0.074                    | 15                      | Pass    |
|         | 5250            | 5250.2    | 5250.15                      | -41.02               | 0.079                    | 857.70                  | Pass    |
|         | 5250.2          | 5251      | 5250.99                      | -42.81               | 0.052                    | 102.33                  | Pass    |
|         | 5251            | 5260      | 5259.28                      | -41.66               | 0.068                    | 18.37                   | Pass    |
|         | 5260            | 5266.7    | 5265.74                      | -42.26               | 0.059                    | 3.24                    | Pass    |
|         | 5266.7          | 5300      | 5284.34                      | -41.93               | 0.064                    | 2.50                    | Pass    |
|         | 5300            | 26000     | 15683.6                      | -38.82               | 0.131                    | 2.50                    | Pass    |
| High    | 30              | 5100      | 1956.22                      | -35.43               | 0.286                    | 2.50                    | Pass    |
|         | 5100            | 5142      | 5116.78                      | -42.15               | 0.061                    | 2.50                    | Pass    |
|         | 5142            | 5150      | 5143.14                      | -41.66               | 0.068                    | 15                      | Pass    |
|         | 5250            | 5250.2    | 5250.01                      | -2.24                | 597.035                  | 2026.13                 | Pass    |
|         | 5250.2          | 5251      | 5250.69                      | -11.76               | 66.681                   | 204.17                  | Pass    |
|         | 5251            | 5260      | 5251.01                      | -17.18               | 19.143                   | 99.80                   | Pass    |
|         | 5260            | 5266.7    | 5265.76                      | -39.68               | 0.108                    | 3.23                    | Pass    |
|         | 5266.7          | 5300      | 5270.06                      | -41.29               | 0.074                    | 2.50                    | Pass    |
|         | 5300            | 26000     | 15965.2                      | -38.87               | 0.130                    | 2.50                    | Pass    |

**5.2G, Chain 0, 802.11ax40**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5100      | 5086.94                      | -37.34               | 0.185                    | 2.50                    | Pass    |
|         | 5100            | 5141.6    | 5137.29                      | -38.31               | 0.148                    | 2.50                    | Pass    |
|         | 5141.6          | 5150      | 5142.50                      | -38.50               | 0.141                    | 15                      | Pass    |
|         | 5250            | 5251      | 5250.99                      | -40.52               | 0.089                    | 51.16                   | Pass    |
|         | 5251            | 5270      | 5268.97                      | -40.98               | 0.080                    | 8.76                    | Pass    |
|         | 5270            | 5278.4    | 5278.24                      | -41.44               | 0.072                    | 2.54                    | Pass    |
|         | 5278.4          | 5300      | 5289.04                      | -39.89               | 0.103                    | 2.50                    | Pass    |
|         | 5300            | 26000     | 15662.9                      | -38.97               | 0.127                    | 2.50                    | Pass    |
| High    | 30              | 5100      | 5089.23                      | -40.54               | 0.088                    | 2.50                    | Pass    |
|         | 5100            | 5141.6    | 5116.49                      | -40.24               | 0.095                    | 2.50                    | Pass    |
|         | 5141.6          | 5150      | 5148.12                      | -40.24               | 0.095                    | 15                      | Pass    |
|         | 5250            | 5251      | 5250.01                      | -7.84                | 164.437                  | 488.62                  | Pass    |
|         | 5251            | 5270      | 5251.02                      | -20.75               | 8.414                    | 49.90                   | Pass    |
|         | 5270            | 5278.4    | 5276.76                      | -39.11               | 0.123                    | 3.11                    | Pass    |
|         | 5278.4          | 5300      | 5279.99                      | -38.79               | 0.132                    | 2.50                    | Pass    |
|         | 5300            | 26000     | 5303.6                       | -35.60               | 0.275                    | 2.50                    | Pass    |

**5.2G, Chain 0, 802.11ax80**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Middle  | 30              | 5100      | 5012.67                      | -40.09               | 0.098                    | 2.50                    | Pass    |
|         | 5100            | 5123.2    | 5101.15                      | -41.51               | 0.071                    | 2.50                    | Pass    |
|         | 5123.2          | 5150      | 5148.41                      | -39.70               | 0.107                    | 15                      | Pass    |
|         | 5250            | 5251      | 5250.97                      | -20.44               | 9.036                    | 26.79                   | Pass    |
|         | 5251            | 5290      | 5251.49                      | -22.70               | 5.370                    | 24.43                   | Pass    |
|         | 5290            | 5296.7    | 5295.71                      | -42.67               | 0.054                    | 2.67                    | Pass    |
|         | 5296.7          | 5350      | 5305.63                      | -41.82               | 0.066                    | 2.50                    | Pass    |
|         | 5350            | 26000     | 17717.8                      | -39.05               | 0.124                    | 2.50                    | Pass    |

**5.2G, Chain 1, 802.11a**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5100      | 5007.09                      | -39.95               | 0.101                    | 2.50                    | Pass    |
|         | 5100            | 5142      | 5135.23                      | -31.99               | 0.632                    | 2.50                    | Pass    |
|         | 5142            | 5150      | 5149.58                      | -29.45               | 1.135                    | 15                      | Pass    |
|         | 5250            | 5251      | 5251.00                      | -36.83               | 0.207                    | 100.00                  | Pass    |
|         | 5251            | 5260      | 5259.95                      | -37.25               | 0.188                    | 16.01                   | Pass    |
|         | 5260            | 5266.7    | 5266.43                      | -36.03               | 0.249                    | 2.68                    | Pass    |
|         | 5266.7          | 5300      | 5268.22                      | -35.57               | 0.277                    | 2.50                    | Pass    |
|         | 5300            | 26000     | 15923.8                      | -37.01               | 0.199                    | 2.50                    | Pass    |
| Middle  | 30              | 5100      | 1941.01                      | -34.84               | 0.328                    | 2.50                    | Pass    |
|         | 5100            | 5142      | 5117.59                      | -36.01               | 0.251                    | 2.50                    | Pass    |
|         | 5142            | 5150      | 5149.39                      | -34.11               | 0.388                    | 15                      | Pass    |
|         | 5250            | 5251      | 5250.99                      | -36.90               | 0.204                    | 102.33                  | Pass    |
|         | 5251            | 5260      | 5259.69                      | -36.63               | 0.217                    | 16.89                   | Pass    |
|         | 5260            | 5266.7    | 5266.69                      | -37.01               | 0.199                    | 2.50                    | Pass    |
|         | 5266.7          | 5300      | 5297.54                      | -36.10               | 0.245                    | 2.50                    | Pass    |
|         | 5300            | 26000     | 6229.9                       | -35.84               | 0.261                    | 2.50                    | Pass    |
| High    | 30              | 5100      | 4860.57                      | -40.05               | 0.099                    | 2.50                    | Pass    |
|         | 5100            | 5142      | 5113.95                      | -35.91               | 0.256                    | 2.50                    | Pass    |
|         | 5142            | 5150      | 5143.98                      | -35.84               | 0.261                    | 15                      | Pass    |
|         | 5250            | 5251      | 5250.45                      | -11.56               | 69.823                   | 354.81                  | Pass    |
|         | 5251            | 5260      | 5259.46                      | -25.10               | 3.090                    | 17.70                   | Pass    |
|         | 5260            | 5266.7    | 5266.19                      | -28.80               | 1.318                    | 2.87                    | Pass    |
|         | 5266.7          | 5300      | 5267.51                      | -30.67               | 0.857                    | 2.50                    | Pass    |
|         | 5300            | 26000     | 15721.9                      | -38.31               | 0.148                    | 2.50                    | Pass    |

**5.2G, Chain 1, 802.11ac20**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5100      | 5012.16                      | -39.78               | 0.105                    | 2.50                    | Pass    |
|         | 5100            | 5142      | 5120.61                      | -39.92               | 0.102                    | 2.50                    | Pass    |
|         | 5142            | 5150      | 5148.02                      | -39.62               | 0.109                    | 15                      | Pass    |
|         | 5250            | 5251      | 5250.97                      | -41.02               | 0.079                    | 107.15                  | Pass    |
|         | 5251            | 5260      | 5259.45                      | -40.13               | 0.097                    | 17.74                   | Pass    |
|         | 5260            | 5266.7    | 5266.04                      | -41.07               | 0.078                    | 2.99                    | Pass    |
|         | 5266.7          | 5300      | 5279.70                      | -39.92               | 0.102                    | 2.50                    | Pass    |
|         | 5300            | 26000     | 16006.6                      | -37.10               | 0.195                    | 2.50                    | Pass    |
| Middle  | 30              | 5100      | 4999.74                      | -39.62               | 0.109                    | 2.50                    | Pass    |
|         | 5100            | 5142      | 5109.65                      | -40.35               | 0.092                    | 2.50                    | Pass    |
|         | 5142            | 5150      | 5146.07                      | -39.29               | 0.118                    | 15                      | Pass    |
|         | 5250            | 5251      | 5250.97                      | -40.78               | 0.084                    | 107.15                  | Pass    |
|         | 5251            | 5260      | 5259.61                      | -40.15               | 0.097                    | 17.17                   | Pass    |
|         | 5260            | 5266.7    | 5266.70                      | -41.68               | 0.068                    | 2.49                    | Pass    |
|         | 5266.7          | 5300      | 5296.99                      | -40.12               | 0.097                    | 2.50                    | Pass    |
|         | 5300            | 26000     | 17735                        | -38.15               | 0.153                    | 2.50                    | Pass    |
| High    | 30              | 5100      | 3446.55                      | -39.76               | 0.106                    | 2.50                    | Pass    |
|         | 5100            | 5142      | 5125.06                      | -39.71               | 0.107                    | 2.50                    | Pass    |
|         | 5142            | 5150      | 5149.94                      | -40.18               | 0.096                    | 15                      | Pass    |
|         | 5250            | 5251      | 5250.36                      | -9.49                | 112.460                  | 436.52                  | Pass    |
|         | 5251            | 5260      | 5251.01                      | -18.52               | 14.060                   | 99.80                   | Pass    |
|         | 5260            | 5266.7    | 5266.58                      | -40.11               | 0.097                    | 2.57                    | Pass    |
|         | 5266.7          | 5300      | 5271.74                      | -39.06               | 0.124                    | 2.50                    | Pass    |
|         | 5300            | 26000     | 16100.7                      | -38.04               | 0.157                    | 2.50                    | Pass    |

**5.2G, Chain 1, 802.11ac40**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5100      | 5095.56                      | -35.76               | 0.265                    | 2.50                    | Pass    |
|         | 5100            | 5141.6    | 5140.96                      | -36.77               | 0.210                    | 2.50                    | Pass    |
|         | 5141.6          | 5150      | 5142.54                      | -36.36               | 0.231                    | 15                      | Pass    |
|         | 5250            | 5251      | 5250.96                      | -40.51               | 0.089                    | 54.82                   | Pass    |
|         | 5251            | 5270      | 5266.95                      | -39.79               | 0.105                    | 10.65                   | Pass    |
|         | 5270            | 5278.4    | 5277.20                      | -39.68               | 0.108                    | 2.93                    | Pass    |
|         | 5278.4          | 5300      | 5293.55                      | -40.09               | 0.098                    | 2.50                    | Pass    |
|         | 5300            | 26000     | 16448.5                      | -37.00               | 0.200                    | 2.50                    | Pass    |
| High    | 30              | 5100      | 5083.14                      | -38.95               | 0.127                    | 2.50                    | Pass    |
|         | 5100            | 5141.6    | 5139.21                      | -39.95               | 0.101                    | 2.50                    | Pass    |
|         | 5141.6          | 5150      | 5146.70                      | -39.22               | 0.120                    | 15                      | Pass    |
|         | 5250            | 5251      | 5250.69                      | -17.51               | 17.742                   | 102.09                  | Pass    |
|         | 5251            | 5270      | 5251.04                      | -21.91               | 6.442                    | 49.81                   | Pass    |
|         | 5270            | 5278.4    | 5277.96                      | -40.76               | 0.084                    | 2.64                    | Pass    |
|         | 5278.4          | 5300      | 5281.09                      | -39.50               | 0.112                    | 2.50                    | Pass    |
|         | 5300            | 26000     | 5307.8                       | -34.70               | 0.339                    | 2.50                    | Pass    |

**5.2G, Chain 1, 802.11ac80**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Middle  | 30              | 5100      | 5086.44                      | -40.89               | 0.081                    | 2.50                    | Pass    |
|         | 5100            | 5123.2    | 5107.76                      | -42.46               | 0.057                    | 2.50                    | Pass    |
|         | 5123.2          | 5150      | 5149.48                      | -40.99               | 0.080                    | 15                      | Pass    |
|         | 5250            | 5251      | 5250.99                      | -26.11               | 2.449                    | 25.58                   | Pass    |
|         | 5251            | 5290      | 5251.10                      | -26.83               | 2.075                    | 24.88                   | Pass    |
|         | 5290            | 5296.7    | 5295.99                      | -41.85               | 0.065                    | 2.62                    | Pass    |
|         | 5296.7          | 5350      | 5317.99                      | -42.12               | 0.061                    | 2.50                    | Pass    |
|         | 5350            | 26000     | 15702.4                      | -37.15               | 0.193                    | 2.50                    | Pass    |

**5.2G, Chain 1, 802.11ax20**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5100      | 5018.75                      | -39.97               | 0.101                    | 2.50                    | Pass    |
|         | 5100            | 5142      | 5119.51                      | -41.77               | 0.067                    | 2.50                    | Pass    |
|         | 5142            | 5150      | 5144.57                      | -40.99               | 0.080                    | 15                      | Pass    |
|         | 5250            | 5250.2    | 5250.19                      | -42.07               | 0.062                    | 670.91                  | Pass    |
|         | 5250.2          | 5251      | 5250.94                      | -42.41               | 0.057                    | 114.82                  | Pass    |
|         | 5251            | 5260      | 5259.77                      | -42.21               | 0.060                    | 16.61                   | Pass    |
|         | 5260            | 5266.7    | 5265.69                      | -42.48               | 0.056                    | 3.29                    | Pass    |
|         | 5266.7          | 5300      | 5281.25                      | -42.03               | 0.063                    | 2.50                    | Pass    |
|         | 5300            | 26000     | 15667.1                      | -37.77               | 0.167                    | 2.50                    | Pass    |
| Middle  | 30              | 5100      | 1947.09                      | -37.26               | 0.188                    | 2.50                    | Pass    |
|         | 5100            | 5142      | 5116.82                      | -42.06               | 0.062                    | 2.50                    | Pass    |
|         | 5142            | 5150      | 5149.29                      | -41.84               | 0.065                    | 15                      | Pass    |
|         | 5250            | 5250.2    | 5250.17                      | -41.96               | 0.064                    | 758.58                  | Pass    |
|         | 5250.2          | 5251      | 5250.99                      | -42.54               | 0.056                    | 102.33                  | Pass    |
|         | 5251            | 5260      | 5259.16                      | -42.10               | 0.062                    | 18.82                   | Pass    |
|         | 5260            | 5266.7    | 5265.11                      | -40.98               | 0.080                    | 3.86                    | Pass    |
|         | 5266.7          | 5300      | 5275.54                      | -41.88               | 0.065                    | 2.50                    | Pass    |
|         | 5300            | 26000     | 15668.1                      | -37.24               | 0.189                    | 2.50                    | Pass    |
| High    | 30              | 5100      | 5087.2                       | -39.96               | 0.101                    | 2.50                    | Pass    |
|         | 5100            | 5142      | 5111.44                      | -41.75               | 0.067                    | 2.50                    | Pass    |
|         | 5142            | 5150      | 5145.12                      | -41.65               | 0.068                    | 15                      | Pass    |
|         | 5250            | 5250.2    | 5250.00                      | -3.73                | 423.643                  | 2154.43                 | Pass    |
|         | 5250.2          | 5251      | 5250.72                      | -13.19               | 47.973                   | 190.55                  | Pass    |
|         | 5251            | 5260      | 5251.04                      | -18.40               | 14.454                   | 99.18                   | Pass    |
|         | 5260            | 5266.7    | 5265.57                      | -41.87               | 0.065                    | 3.40                    | Pass    |
|         | 5266.7          | 5300      | 5274.55                      | -41.48               | 0.071                    | 2.50                    | Pass    |
|         | 5300            | 26000     | 5300.5                       | -36.80               | 0.209                    | 2.50                    | Pass    |

**5.2G, Chain 1, 802.11ax40**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5100      | 5085.42                      | -37.27               | 0.187                    | 2.50                    | Pass    |
|         | 5100            | 5141.6    | 5135.34                      | -37.70               | 0.170                    | 2.50                    | Pass    |
|         | 5141.6          | 5150      | 5143.60                      | -35.02               | 0.315                    | 15                      | Pass    |
|         | 5250            | 5251      | 5250.97                      | -40.19               | 0.096                    | 53.58                   | Pass    |
|         | 5251            | 5270      | 5269.78                      | -41.05               | 0.079                    | 8.10                    | Pass    |
|         | 5270            | 5278.4    | 5277.68                      | -40.03               | 0.099                    | 2.74                    | Pass    |
|         | 5278.4          | 5300      | 5291.98                      | -40.32               | 0.093                    | 2.50                    | Pass    |
|         | 5300            | 26000     | 15661.9                      | -37.61               | 0.173                    | 2.50                    | Pass    |
| High    | 30              | 5100      | 5089.73                      | -37.31               | 0.186                    | 2.50                    | Pass    |
|         | 5100            | 5141.6    | 5132.80                      | -40.37               | 0.092                    | 2.50                    | Pass    |
|         | 5141.6          | 5150      | 5146.28                      | -39.87               | 0.103                    | 15                      | Pass    |
|         | 5250            | 5251      | 5250.12                      | -9.32                | 116.950                  | 379.29                  | Pass    |
|         | 5251            | 5270      | 5251.03                      | -20.89               | 8.147                    | 49.85                   | Pass    |
|         | 5270            | 5278.4    | 5277.23                      | -36.58               | 0.220                    | 2.92                    | Pass    |
|         | 5278.4          | 5300      | 5279.32                      | -37.50               | 0.178                    | 2.50                    | Pass    |
|         | 5300            | 26000     | 5304.7                       | -35.05               | 0.313                    | 2.50                    | Pass    |

**5.2G, Chain 1, 802.11ax80**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Middle  | 30              | 5100      | 3359.34                      | -41.28               | 0.074                    | 2.50                    | Pass    |
|         | 5100            | 5123.2    | 5108.15                      | -41.86               | 0.065                    | 2.50                    | Pass    |
|         | 5123.2          | 5150      | 5141.81                      | -41.57               | 0.070                    | 15                      | Pass    |
|         | 5250            | 5251      | 5250.99                      | -20.56               | 8.790                    | 25.58                   | Pass    |
|         | 5251            | 5290      | 5251.02                      | -20.71               | 8.492                    | 24.98                   | Pass    |
|         | 5290            | 5296.7    | 5296.47                      | -43.13               | 0.049                    | 2.53                    | Pass    |
|         | 5296.7          | 5350      | 5343.15                      | -41.80               | 0.066                    | 2.50                    | Pass    |
|         | 5350            | 26000     | 15629.1                      | -37.74               | 0.168                    | 2.50                    | Pass    |

**5.2G, Chain 0+Chain 1, 802.11ac20**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                    | Limit<br>(μW/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------|-------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>(μW/MHz) |                   |         |
| Low     | 30              | 5100      | /                            | -37.19               | 0.191              | 2.50              | Pass    |
|         | 5100            | 5142      | 5141.84                      | -30.11               | 0.975              | 2.50              | Pass    |
|         | 5142            | 5150      | 5149.21                      | -26.52               | 2.228              | 15                | Pass    |
|         | 5250            | 5251      | 5250.89                      | -34.58               | 0.348              | 128.82            | Pass    |
|         | 5251            | 5260      | 5259.96                      | -35.59               | 0.276              | 15.98             | Pass    |
|         | 5260            | 5266.7    | 5266.17                      | -35.22               | 0.301              | 2.88              | Pass    |
|         | 5266.7          | 5300      | 5273.09                      | -33.69               | 0.428              | 2.50              | Pass    |
|         | 5300            | 26000     | /                            | -34.80               | 0.331              | 2.50              | Pass    |
| Middle  | 30              | 5100      | /                            | -35.67               | 0.271              | 2.50              | Pass    |
|         | 5100            | 5142      | 5108.79                      | -33.76               | 0.421              | 2.50              | Pass    |
|         | 5142            | 5150      | 5145.62                      | -33.44               | 0.453              | 15                | Pass    |
|         | 5250            | 5251      | 5250.86                      | -33.91               | 0.406              | 138.04            | Pass    |
|         | 5251            | 5260      | 5259.57                      | -35.11               | 0.308              | 17.31             | Pass    |
|         | 5260            | 5266.7    | 5266.54                      | -35.68               | 0.270              | 2.60              | Pass    |
|         | 5266.7          | 5300      | 5296.65                      | -33.91               | 0.406              | 2.50              | Pass    |
|         | 5300            | 26000     | /                            | -35.41               | 0.288              | 2.50              | Pass    |
| High    | 30              | 5100      | /                            | -37.32               | 0.185              | 2.50              | Pass    |
|         | 5100            | 5142      | 5136.11                      | -34.04               | 0.394              | 2.50              | Pass    |
|         | 5142            | 5150      | 5145.45                      | -34.04               | 0.394              | 15                | Pass    |
|         | 5250            | 5251      | 5250.00                      | -2.88                | 515.229            | 1000.00           | Pass    |
|         | 5251            | 5260      | 5251.02                      | -14.33               | 36.898             | 99.59             | Pass    |
|         | 5260            | 5266.7    | 5262.17                      | -23.89               | 4.083              | 8.70              | Pass    |
|         | 5266.7          | 5300      | 5267.39                      | -29.57               | 1.104              | 2.50              | Pass    |
|         | 5300            | 26000     | /                            | -35.25               | 0.299              | 2.50              | Pass    |

Note:

For 30-5100MHz, 5300-26000MHz:

Result (dBm/MHz) =  $10 \cdot \log\{10^{\lfloor \text{Result (dBm/MHz)}_{\text{Chain0}}/10 \rfloor} + 10^{\lfloor \text{Result (dBm/MHz)}_{\text{Chain1}}/10 \rfloor}\}$ Result (μW/MHz) =  $\{10^{\lfloor \text{Result (dBm/MHz)}/10 \rfloor}\} \cdot 1000$

**5.2G, Chain 0+Chain 1, 802.11ac40**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                    | Limit<br>(μW/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------|-------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>(μW/MHz) |                   |         |
| Low     | 30              | 5100      | /                            | -33.52               | 0.445              | 2.50              | Pass    |
|         | 5100            | 5141.6    | 5140.62                      | -28.14               | 1.535              | 2.50              | Pass    |
|         | 5141.6          | 5150      | 5148.32                      | -25.21               | 3.013              | 15                | Pass    |
|         | 5250            | 5251      | 5250.97                      | -31.76               | 0.667              | 53.58             | Pass    |
|         | 5251            | 5270      | 5269.56                      | -33.36               | 0.461              | 8.27              | Pass    |
|         | 5270            | 5278.4    | 5278.33                      | -33.06               | 0.494              | 2.51              | Pass    |
|         | 5278.4          | 5300      | 5293.34                      | -32.33               | 0.585              | 2.50              | Pass    |
|         | 5300            | 26000     | /                            | -34.57               | 0.349              | 2.50              | Pass    |
| High    | 30              | 5100      | /                            | -35.71               | 0.269              | 2.50              | Pass    |
|         | 5100            | 5141.6    | 5123.44                      | -33.35               | 0.462              | 2.50              | Pass    |
|         | 5141.6          | 5150      | 5147.24                      | -33.56               | 0.441              | 15                | Pass    |
|         | 5250            | 5251      | 5250.44                      | -8.93                | 127.938            | 181.54            | Pass    |
|         | 5251            | 5270      | 5251.00                      | -15.63               | 27.353             | 50.00             | Pass    |
|         | 5270            | 5278.4    | 5275.65                      | -31.32               | 0.738              | 3.63              | Pass    |
|         | 5278.4          | 5300      | 5284.01                      | -32.15               | 0.610              | 2.50              | Pass    |
|         | 5300            | 26000     | /                            | -32.01               | 0.630              | 2.50              | Pass    |

Note:

For 30-5100MHz, 5300-26000MHz:

Result (dBm/MHz) =  $10 \cdot \log\{10^{\lceil \text{Result (dBm/MHz)}_{\text{Chain0}}/10 \rceil} + 10^{\lceil \text{Result (dBm/MHz)}_{\text{Chain1}}/10 \rceil}\}$ Result (μW/MHz) =  $\{10^{\lceil \text{Result (dBm/MHz)}/10 \rceil}\} \cdot 1000$ **5.2G, Chain 0+Chain 1, 802.11ac80**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                    | Limit<br>(μW/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------|-------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>(μW/MHz) |                   |         |
| Middle  | 30              | 5100      | /                            | -38.55               | 0.140              | 2.50              | Pass    |
|         | 5100            | 5123.2    | 5105.07                      | -32.98               | 0.504              | 2.50              | Pass    |
|         | 5123.2          | 5150      | 5146.96                      | -32.32               | 0.586              | 15                | Pass    |
|         | 5250            | 5251      | 5250.98                      | -16.18               | 24.099             | 26.18             | Pass    |
|         | 5251            | 5290      | 5251.37                      | -17.09               | 19.543             | 24.57             | Pass    |
|         | 5290            | 5296.7    | 5295.73                      | -34.37               | 0.366              | 2.67              | Pass    |
|         | 5296.7          | 5350      | 5309.04                      | -33.58               | 0.439              | 2.50              | Pass    |
|         | 5350            | 26000     | /                            | -34.95               | 0.320              | 2.50              | Pass    |

Note:

For 30-5100MHz, 5350-26000MHz:

Result (dBm/MHz) =  $10 \cdot \log\{10^{\lceil \text{Result (dBm/MHz)}_{\text{Chain0}}/10 \rceil} + 10^{\lceil \text{Result (dBm/MHz)}_{\text{Chain1}}/10 \rceil}\}$ Result (μW/MHz) =  $\{10^{\lceil \text{Result (dBm/MHz)}/10 \rceil}\} \cdot 1000$

**5.2G, Chain 0+Chain 1, 802.11ax20**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                    | Limit<br>(μW/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------|-------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>(μW/MHz) |                   |         |
| Low     | 30              | 5100      | /                            | -37.25               | 0.188              | 2.50              | Pass    |
|         | 5100            | 5142      | 5104.31                      | -33.85               | 0.412              | 2.50              | Pass    |
|         | 5142            | 5150      | 5147.95                      | -33.08               | 0.492              | 15                | Pass    |
|         | 5250            | 5250.2    | 5250.17                      | -33.89               | 0.408              | 758.58            | Pass    |
|         | 5250.2          | 5251      | 5250.97                      | -31.59               | 0.693              | 107.15            | Pass    |
|         | 5251            | 5260      | 5258.90                      | -33.67               | 0.430              | 19.85             | Pass    |
|         | 5260            | 5266.7    | 5265.65                      | -34.02               | 0.396              | 3.33              | Pass    |
|         | 5266.7          | 5300      | 5273.36                      | -33.62               | 0.435              | 2.50              | Pass    |
|         | 5300            | 26000     | /                            | -35.26               | 0.298              | 2.50              | Pass    |
| Middle  | 30              | 5100      | /                            | -35.59               | 0.276              | 2.50              | Pass    |
|         | 5100            | 5142      | 5107.75                      | -33.80               | 0.417              | 2.50              | Pass    |
|         | 5142            | 5150      | 5148.60                      | -33.18               | 0.481              | 15                | Pass    |
|         | 5250            | 5250.2    | 5250.14                      | -33.59               | 0.438              | 912.01            | Pass    |
|         | 5250.2          | 5251      | 5250.99                      | -33.78               | 0.419              | 102.33            | Pass    |
|         | 5251            | 5260      | 5258.79                      | -33.48               | 0.449              | 20.30             | Pass    |
|         | 5260            | 5266.7    | 5265.10                      | -33.93               | 0.405              | 3.87              | Pass    |
|         | 5266.7          | 5300      | 5267.21                      | -34.02               | 0.396              | 2.50              | Pass    |
|         | 5300            | 26000     | /                            | -34.95               | 0.320              | 2.50              | Pass    |
| High    | 30              | 5100      | /                            | -34.12               | 0.387              | 2.50              | Pass    |
|         | 5100            | 5142      | 5124.21                      | -33.09               | 0.491              | 2.50              | Pass    |
|         | 5142            | 5150      | 5142.93                      | -33.88               | 0.409              | 15                | Pass    |
|         | 5250            | 5250.2    | 5250.01                      | 0.88                 | 1224.616           | 2026.13           | Pass    |
|         | 5250.2          | 5251      | 5250.71                      | -7.39                | 182.390            | 194.98            | Pass    |
|         | 5251            | 5260      | 5251.01                      | -13.93               | 40.458             | 99.80             | Pass    |
|         | 5260            | 5266.7    | 5264.74                      | -33.79               | 0.418              | 4.28              | Pass    |
|         | 5266.7          | 5300      | 5269.52                      | -34.06               | 0.393              | 2.50              | Pass    |
|         | 5300            | 26000     | /                            | -34.70               | 0.339              | 2.50              | Pass    |

Note:

For 30-5100MHz, 5300-26000MHz:

Result (dBm/MHz) =  $10 \cdot \log\{10^{\lceil \text{Result (dBm/MHz)}_{\text{Chain0}} / 10 \rceil} + 10^{\lceil \text{Result (dBm/MHz)}_{\text{Chain1}} / 10 \rceil}\}$ Result (μW/MHz) =  $\{10^{\lceil \text{Result (dBm/MHz)} / 10 \rceil}\} \cdot 1000$

**5.2G, Chain 0+Chain 1, 802.11ax40**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                    | Limit<br>(μW/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------|-------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>(μW/MHz) |                   |         |
| Low     | 30              | 5100      | /                            | -34.29               | 0.372              | 2.50              | Pass    |
|         | 5100            | 5141.6    | 5135.55                      | -32.77               | 0.528              | 2.50              | Pass    |
|         | 5141.6          | 5150      | 5147.95                      | -31.34               | 0.735              | 15                | Pass    |
|         | 5250            | 5251      | 5251.00                      | -33.89               | 0.408              | 50.00             | Pass    |
|         | 5251            | 5270      | 5266.62                      | -32.55               | 0.556              | 11.00             | Pass    |
|         | 5270            | 5278.4    | 5278.30                      | -34.54               | 0.352              | 2.52              | Pass    |
|         | 5278.4          | 5300      | 5299.06                      | -33.06               | 0.494              | 2.50              | Pass    |
|         | 5300            | 26000     | /                            | -35.23               | 0.300              | 2.50              | Pass    |
| High    | 30              | 5100      | /                            | -35.62               | 0.274              | 2.50              | Pass    |
|         | 5100            | 5141.6    | 5116.45                      | -33.04               | 0.497              | 2.50              | Pass    |
|         | 5141.6          | 5150      | 5147.65                      | -32.74               | 0.532              | 15                | Pass    |
|         | 5250            | 5251      | 5250.01                      | -3.79                | 417.830            | 488.62            | Pass    |
|         | 5251            | 5270      | 5251.01                      | -16.65               | 21.627             | 49.95             | Pass    |
|         | 5270            | 5278.4    | 5277.63                      | -34.03               | 0.395              | 2.76              | Pass    |
|         | 5278.4          | 5300      | 5279.66                      | -33.43               | 0.454              | 2.50              | Pass    |
|         | 5300            | 26000     | /                            | -32.31               | 0.587              | 2.50              | Pass    |

Note:

For 30-5100MHz, 5300-26000MHz:

Result (dBm/MHz) =  $10 \cdot \log \{ 10^{\lceil \text{Result (dBm/MHz)}_{\text{Chain0}} / 10 \rceil} + 10^{\lceil \text{Result (dBm/MHz)}_{\text{Chain1}} / 10 \rceil} \}$ Result (μW/MHz) =  $\{ 10^{\lceil \text{Result (dBm/MHz)} / 10 \rceil} \} \cdot 1000$ **5.2G, Chain 0+Chain 1, 802.11ax80**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                    | Limit<br>(μW/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------|-------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>(μW/MHz) |                   |         |
| Middle  | 30              | 5100      | /                            | -37.63               | 0.173              | 2.50              | Pass    |
|         | 5100            | 5123.2    | 5111.38                      | -33.99               | 0.399              | 2.50              | Pass    |
|         | 5123.2          | 5150      | 5130.15                      | -34.15               | 0.385              | 15                | Pass    |
|         | 5250            | 5251      | 5250.94                      | -15.52               | 28.054             | 28.70             | Pass    |
|         | 5251            | 5290      | 5251.18                      | -16.97               | 20.091             | 24.79             | Pass    |
|         | 5290            | 5296.7    | 5295.28                      | -34.22               | 0.378              | 2.75              | Pass    |
|         | 5296.7          | 5350      | 5321.56                      | -33.94               | 0.404              | 2.50              | Pass    |
|         | 5350            | 26000     | /                            | -35.34               | 0.292              | 2.50              | Pass    |

Note:

For 30-5100MHz, 5350-26000MHz:

Result (dBm/MHz) =  $10 \cdot \log \{ 10^{\lceil \text{Result (dBm/MHz)}_{\text{Chain0}} / 10 \rceil} + 10^{\lceil \text{Result (dBm/MHz)}_{\text{Chain1}} / 10 \rceil} \}$ Result (μW/MHz) =  $\{ 10^{\lceil \text{Result (dBm/MHz)} / 10 \rceil} \} \cdot 1000$

**5.3G, Chain 0, 802.11a**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5200      | 5102.42                      | -39.73               | 0.106                    | 2.50                    | Pass    |
|         | 5200            | 5233.3    | 5226.36                      | -35.66               | 0.272                    | 2.50                    | Pass    |
|         | 5233.3          | 5240      | 5239.58                      | -27.52               | 1.770                    | 14.11                   | Pass    |
|         | 5240            | 5249      | 5246.27                      | -19.94               | 10.139                   | 57.19                   | Pass    |
|         | 5249            | 5250      | 5249.42                      | -14.75               | 33.497                   | 263.03                  | Pass    |
|         | 5350            | 5400      | 5389.43                      | -36.40               | 0.229                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 15671.7                      | -38.02               | 0.158                    | 2.50                    | Pass    |
| Middle  | 30              | 5200      | 3428.11                      | -37.16               | 0.192                    | 2.50                    | Pass    |
|         | 5200            | 5233.3    | 5210.87                      | -37.66               | 0.171                    | 2.50                    | Pass    |
|         | 5233.3          | 5240      | 5233.42                      | -38.22               | 0.151                    | 2.57                    | Pass    |
|         | 5240            | 5249      | 5240.33                      | -37.10               | 0.195                    | 16.96                   | Pass    |
|         | 5249            | 5250      | 5249.00                      | -35.70               | 0.269                    | 100.00                  | Pass    |
|         | 5350            | 5400      | 5396.83                      | -36.98               | 0.200                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 19381.7                      | -37.93               | 0.161                    | 2.50                    | Pass    |
| High    | 30              | 5200      | 906.7                        | -38.06               | 0.156                    | 2.50                    | Pass    |
|         | 5200            | 5233.3    | 5231.32                      | -37.50               | 0.178                    | 2.50                    | Pass    |
|         | 5233.3          | 5240      | 5233.63                      | -37.36               | 0.184                    | 2.73                    | Pass    |
|         | 5240            | 5249      | 5240.10                      | -38.06               | 0.156                    | 16.18                   | Pass    |
|         | 5249            | 5250      | 5249.06                      | -37.11               | 0.195                    | 114.82                  | Pass    |
|         | 5350            | 5400      | 5351.78                      | -36.46               | 0.226                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 19408.5                      | -38.95               | 0.127                    | 2.50                    | Pass    |

**5.3G, Chain 0, 802.11ac20**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5200      | 5112.5                       | -39.26               | 0.119                    | 2.50                    | Pass    |
|         | 5200            | 5233.3    | 5222.36                      | -39.78               | 0.105                    | 2.50                    | Pass    |
|         | 5233.3          | 5240      | 5233.40                      | -40.20               | 0.095                    | 2.56                    | Pass    |
|         | 5240            | 5249      | 5249.00                      | -18.48               | 14.191                   | 100.00                  | Pass    |
|         | 5249            | 5250      | 5249.64                      | -7.70                | 169.824                  | 436.52                  | Pass    |
|         | 5350            | 5400      | 5399.37                      | -39.53               | 0.111                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 15699.5                      | -38.68               | 0.136                    | 2.50                    | Pass    |
| Middle  | 30              | 5200      | 5130.59                      | -40.65               | 0.086                    | 2.50                    | Pass    |
|         | 5200            | 5233.3    | 5233.28                      | -39.88               | 0.103                    | 2.50                    | Pass    |
|         | 5233.3          | 5240      | 5233.38                      | -40.61               | 0.087                    | 2.54                    | Pass    |
|         | 5240            | 5249      | 5240.17                      | -40.07               | 0.098                    | 16.41                   | Pass    |
|         | 5249            | 5250      | 5249.13                      | -39.22               | 0.120                    | 134.90                  | Pass    |
|         | 5350            | 5400      | 5375.03                      | -39.38               | 0.115                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 15870.5                      | -38.48               | 0.142                    | 2.50                    | Pass    |
| High    | 30              | 5200      | 5170.66                      | -40.59               | 0.087                    | 2.50                    | Pass    |
|         | 5200            | 5233.3    | 5215.03                      | -39.74               | 0.106                    | 2.50                    | Pass    |
|         | 5233.3          | 5240      | 5233.84                      | -40.00               | 0.100                    | 2.89                    | Pass    |
|         | 5240            | 5249      | 5240.62                      | -40.84               | 0.082                    | 17.99                   | Pass    |
|         | 5249            | 5250      | 5249.05                      | -41.38               | 0.073                    | 112.20                  | Pass    |
|         | 5350            | 5400      | 5354.23                      | -38.99               | 0.126                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 15698.5                      | -37.43               | 0.181                    | 2.50                    | Pass    |

**5.3G, Chain 0, 802.11ac40**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5200      | 5164.97                      | -34.36               | 0.366                    | 2.50                    | Pass    |
|         | 5200            | 5221.6    | 5219.54                      | -34.60               | 0.347                    | 2.50                    | Pass    |
|         | 5221.6          | 5230      | 5222.17                      | -34.28               | 0.373                    | 2.69                    | Pass    |
|         | 5230            | 5249      | 5248.95                      | -21.12               | 7.727                    | 49.76                   | Pass    |
|         | 5249            | 5250      | 5249.21                      | -17.35               | 18.408                   | 81.09                   | Pass    |
|         | 5350            | 5358.4    | 5351.93                      | -41.66               | 0.068                    | 15                      | Pass    |
|         | 5358.4          | 5400      | 5367.32                      | -41.78               | 0.066                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 5727                         | -38.29               | 0.148                    | 2.50                    | Pass    |
| High    | 30              | 5200      | 5195.99                      | -36.94               | 0.202                    | 2.50                    | Pass    |
|         | 5200            | 5221.6    | 5217.72                      | -41.43               | 0.072                    | 2.50                    | Pass    |
|         | 5221.6          | 5230      | 5223.64                      | -41.29               | 0.074                    | 3.29                    | Pass    |
|         | 5230            | 5249      | 5231.55                      | -40.84               | 0.082                    | 9.21                    | Pass    |
|         | 5249            | 5250      | 5249.04                      | -38.19               | 0.152                    | 54.82                   | Pass    |
|         | 5350            | 5358.4    | 5352.38                      | -31.31               | 0.740                    | 15                      | Pass    |
|         | 5358.4          | 5400      | 5358.84                      | -34.93               | 0.321                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 5401.5                       | -37.92               | 0.161                    | 2.50                    | Pass    |

**5.3G, Chain 0, 802.11ac80**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Middle  | 30              | 5200      | 5197.29                      | -40.73               | 0.085                    | 2.50                    | Pass    |
|         | 5200            | 5203.3    | 5200.44                      | -40.69               | 0.085                    | 2.50                    | Pass    |
|         | 5203.3          | 5210      | 5206.04                      | -40.40               | 0.091                    | 3.01                    | Pass    |
|         | 5210            | 5249      | 5248.90                      | -22.31               | 5.875                    | 24.88                   | Pass    |
|         | 5249            | 5250      | 5249.02                      | -21.58               | 6.950                    | 26.18                   | Pass    |
|         | 5350            | 5376.8    | 5353.18                      | -40.23               | 0.095                    | 15                      | Pass    |
|         | 5376.8          | 5400      | 5378.16                      | -41.99               | 0.063                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 15794.2                      | -38.50               | 0.141                    | 2.50                    | Pass    |

**5.3G, Chain 0, 802.11ax20**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5200      | 905.15                       | -36.32               | 0.233                    | 2.50                    | Pass    |
|         | 5200            | 5233.3    | 5232.58                      | -40.92               | 0.081                    | 2.50                    | Pass    |
|         | 5233.3          | 5240      | 5233.99                      | -42.02               | 0.063                    | 3.01                    | Pass    |
|         | 5240            | 5249      | 5248.99                      | -17.56               | 17.539                   | 99.80                   | Pass    |
|         | 5249            | 5249.8    | 5249.71                      | -6.32                | 233.346                  | 512.86                  | Pass    |
|         | 5249.8          | 5250      | 5249.81                      | -5.51                | 281.190                  | 670.91                  | Pass    |
|         | 5350            | 5400      | 5354.08                      | -42.26               | 0.059                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 15649                        | -37.90               | 0.162                    | 2.50                    | Pass    |
| Middle  | 30              | 5200      | 5199.87                      | -40.71               | 0.085                    | 2.50                    | Pass    |
|         | 5200            | 5233.3    | 5225.19                      | -41.43               | 0.072                    | 2.50                    | Pass    |
|         | 5233.3          | 5240      | 5233.59                      | -43.18               | 0.048                    | 2.70                    | Pass    |
|         | 5240            | 5249      | 5240.30                      | -42.72               | 0.053                    | 16.85                   | Pass    |
|         | 5249            | 5249.8    | 5249.09                      | -42.25               | 0.060                    | 123.03                  | Pass    |
|         | 5249.8          | 5250      | 5249.81                      | -42.00               | 0.063                    | 670.91                  | Pass    |
|         | 5350            | 5400      | 5393.82                      | -42.03               | 0.063                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 15789.1                      | -38.26               | 0.149                    | 2.50                    | Pass    |
| High    | 30              | 5200      | 3497.91                      | -37.95               | 0.160                    | 2.50                    | Pass    |
|         | 5200            | 5233.3    | 5228.99                      | -41.47               | 0.071                    | 2.50                    | Pass    |
|         | 5233.3          | 5240      | 5233.30                      | -41.64               | 0.069                    | 2.49                    | Pass    |
|         | 5240            | 5249      | 5240.45                      | -41.96               | 0.064                    | 17.38                   | Pass    |
|         | 5249            | 5249.8    | 5249.07                      | -42.45               | 0.057                    | 117.49                  | Pass    |
|         | 5249.8          | 5250      | 5249.80                      | -43.19               | 0.048                    | 630.96                  | Pass    |
|         | 5350            | 5400      | 5358.43                      | -41.00               | 0.079                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 16914.9                      | -38.18               | 0.152                    | 2.50                    | Pass    |

**5.3G, Chain 0, 802.11ax40**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5200      | 5185.65                      | -35.17               | 0.304                    | 2.50                    | Pass    |
|         | 5200            | 5221.6    | 5206.75                      | -41.73               | 0.067                    | 2.50                    | Pass    |
|         | 5221.6          | 5230      | 5222.01                      | -41.62               | 0.069                    | 2.63                    | Pass    |
|         | 5230            | 5249      | 5248.84                      | -22.36               | 5.808                    | 49.23                   | Pass    |
|         | 5249            | 5250      | 5249.66                      | -12.35               | 58.210                   | 228.54                  | Pass    |
|         | 5350            | 5358.4    | 5351.50                      | -41.34               | 0.073                    | 15                      | Pass    |
|         | 5358.4          | 5400      | 5375.19                      | -41.87               | 0.065                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 15704.6                      | -38.79               | 0.132                    | 2.50                    | Pass    |
| High    | 30              | 5200      | 5199.61                      | -37.66               | 0.171                    | 2.50                    | Pass    |
|         | 5200            | 5221.6    | 5219.77                      | -41.64               | 0.069                    | 2.50                    | Pass    |
|         | 5221.6          | 5230      | 5222.13                      | -42.34               | 0.058                    | 2.67                    | Pass    |
|         | 5230            | 5249      | 5230.29                      | -42.94               | 0.051                    | 8.15                    | Pass    |
|         | 5249            | 5250      | 5249.02                      | -42.45               | 0.057                    | 52.36                   | Pass    |
|         | 5350            | 5358.4    | 5352.35                      | -40.79               | 0.083                    | 15                      | Pass    |
|         | 5358.4          | 5400      | 5369.32                      | -41.55               | 0.070                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 5421.1                       | -38.68               | 0.136                    | 2.50                    | Pass    |

**5.3G, Chain 0, 802.11ax80**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Middle  | 30              | 5200      | 4104.86                      | -41.14               | 0.077                    | 2.50                    | Pass    |
|         | 5200            | 5203.3    | 5200.18                      | -41.48               | 0.071                    | 2.50                    | Pass    |
|         | 5203.3          | 5210      | 5203.50                      | -42.21               | 0.060                    | 2.53                    | Pass    |
|         | 5210            | 5249      | 5248.40                      | -24.49               | 3.556                    | 24.30                   | Pass    |
|         | 5249            | 5250      | 5249.02                      | -22.79               | 5.260                    | 26.18                   | Pass    |
|         | 5350            | 5376.8    | 5354.25                      | -39.30               | 0.117                    | 15                      | Pass    |
|         | 5376.8          | 5400      | 5384.40                      | -41.45               | 0.072                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 15774.7                      | -38.95               | 0.127                    | 2.50                    | Pass    |

**5.3G, Chain 1, 802.11a**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5200      | 3410.79                      | -39.77               | 0.105                    | 2.50                    | Pass    |
|         | 5200            | 5233.3    | 5229.82                      | -32.46               | 0.568                    | 2.50                    | Pass    |
|         | 5233.3          | 5240      | 5234.74                      | -29.57               | 1.104                    | 3.71                    | Pass    |
|         | 5240            | 5249      | 5246.84                      | -16.26               | 23.659                   | 64.27                   | Pass    |
|         | 5249            | 5250      | 5249.04                      | -14.49               | 35.563                   | 109.65                  | Pass    |
|         | 5350            | 5400      | 5352.63                      | -36.18               | 0.241                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 15664.5                      | -37.62               | 0.173                    | 2.50                    | Pass    |
| Middle  | 30              | 5200      | 5116.89                      | -38.65               | 0.136                    | 2.50                    | Pass    |
|         | 5200            | 5233.3    | 5206.34                      | -36.04               | 0.249                    | 2.50                    | Pass    |
|         | 5233.3          | 5240      | 5233.48                      | -37.08               | 0.196                    | 2.62                    | Pass    |
|         | 5240            | 5249      | 5241.03                      | -36.36               | 0.231                    | 19.57                   | Pass    |
|         | 5249            | 5250      | 5249.07                      | -32.79               | 0.526                    | 117.49                  | Pass    |
|         | 5350            | 5400      | 5370.48                      | -36.00               | 0.251                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 15704.6                      | -37.41               | 0.182                    | 2.50                    | Pass    |
| High    | 30              | 5200      | 905.67                       | -38.12               | 0.154                    | 2.50                    | Pass    |
|         | 5200            | 5233.3    | 5203.21                      | -36.50               | 0.224                    | 2.50                    | Pass    |
|         | 5233.3          | 5240      | 5233.71                      | -36.96               | 0.201                    | 2.79                    | Pass    |
|         | 5240            | 5249      | 5240.53                      | -36.79               | 0.209                    | 17.66                   | Pass    |
|         | 5249            | 5250      | 5249.01                      | -37.68               | 0.171                    | 102.33                  | Pass    |
|         | 5350            | 5400      | 5352.18                      | -33.71               | 0.426                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 19486.8                      | -38.16               | 0.153                    | 2.50                    | Pass    |

**5.3G, Chain 1, 802.11ac20**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5200      | 905.15                       | -39.16               | 0.121                    | 2.50                    | Pass    |
|         | 5200            | 5233.3    | 5202.38                      | -39.50               | 0.112                    | 2.50                    | Pass    |
|         | 5233.3          | 5240      | 5233.46                      | -40.58               | 0.087                    | 2.60                    | Pass    |
|         | 5240            | 5249      | 5249.00                      | -15.80               | 26.303                   | 100.00                  | Pass    |
|         | 5249            | 5250      | 5249.60                      | -7.53                | 176.604                  | 398.11                  | Pass    |
|         | 5350            | 5400      | 5399.48                      | -39.41               | 0.115                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 15745.8                      | -38.04               | 0.157                    | 2.50                    | Pass    |
| Middle  | 30              | 5200      | 5081.22                      | -39.48               | 0.113                    | 2.50                    | Pass    |
|         | 5200            | 5233.3    | 5233.25                      | -39.89               | 0.103                    | 2.50                    | Pass    |
|         | 5233.3          | 5240      | 5233.81                      | -40.35               | 0.092                    | 2.87                    | Pass    |
|         | 5240            | 5249      | 5240.54                      | -39.53               | 0.111                    | 17.70                   | Pass    |
|         | 5249            | 5250      | 5249.02                      | -40.51               | 0.089                    | 104.71                  | Pass    |
|         | 5350            | 5400      | 5380.58                      | -39.30               | 0.117                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 17742                        | -37.85               | 0.164                    | 2.50                    | Pass    |
| High    | 30              | 5200      | 5194.96                      | -39.82               | 0.104                    | 2.50                    | Pass    |
|         | 5200            | 5233.3    | 5200.58                      | -39.42               | 0.114                    | 2.50                    | Pass    |
|         | 5233.3          | 5240      | 5233.58                      | -40.11               | 0.097                    | 2.69                    | Pass    |
|         | 5240            | 5249      | 5240.52                      | -39.44               | 0.114                    | 17.63                   | Pass    |
|         | 5249            | 5250      | 5249.05                      | -40.26               | 0.094                    | 112.20                  | Pass    |
|         | 5350            | 5400      | 5364.58                      | -38.44               | 0.143                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 15647                        | -37.00               | 0.200                    | 2.50                    | Pass    |

**5.3G, Chain 1, 802.11ac40**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5200      | 5164.46                      | -33.45               | 0.452                    | 2.50                    | Pass    |
|         | 5200            | 5221.6    | 5221.29                      | -41.07               | 0.078                    | 2.50                    | Pass    |
|         | 5221.6          | 5230      | 5221.85                      | -41.41               | 0.072                    | 2.57                    | Pass    |
|         | 5230            | 5249      | 5248.97                      | -23.35               | 4.624                    | 49.85                   | Pass    |
|         | 5249            | 5250      | 5249.21                      | -19.24               | 11.912                   | 81.09                   | Pass    |
|         | 5350            | 5358.4    | 5357.61                      | -41.63               | 0.069                    | 15                      | Pass    |
|         | 5358.4          | 5400      | 5359.17                      | -41.84               | 0.065                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 16425.6                      | -37.52               | 0.177                    | 2.50                    | Pass    |
| High    | 30              | 5200      | 5198.32                      | -36.06               | 0.248                    | 2.50                    | Pass    |
|         | 5200            | 5221.6    | 5214.03                      | -40.73               | 0.085                    | 2.50                    | Pass    |
|         | 5221.6          | 5230      | 5221.63                      | -42.50               | 0.056                    | 2.49                    | Pass    |
|         | 5230            | 5249      | 5230.43                      | -42.65               | 0.054                    | 8.26                    | Pass    |
|         | 5249            | 5250      | 5249.00                      | -43.17               | 0.048                    | 50.00                   | Pass    |
|         | 5350            | 5358.4    | 5354.33                      | -40.88               | 0.082                    | 15                      | Pass    |
|         | 5358.4          | 5400      | 5379.47                      | -41.40               | 0.072                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 5405.7                       | -35.26               | 0.298                    | 2.50                    | Pass    |

**5.3G, Chain 1, 802.11ac80**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Middle  | 30              | 5200      | 4331.83                      | -40.41               | 0.091                    | 2.50                    | Pass    |
|         | 5200            | 5203.3    | 5202.03                      | -41.47               | 0.071                    | 2.50                    | Pass    |
|         | 5203.3          | 5210      | 5206.26                      | -41.13               | 0.077                    | 3.06                    | Pass    |
|         | 5210            | 5249      | 5248.98                      | -25.13               | 3.069                    | 24.98                   | Pass    |
|         | 5249            | 5250      | 5249.02                      | -24.31               | 3.707                    | 26.18                   | Pass    |
|         | 5350            | 5376.8    | 5350.84                      | -40.55               | 0.088                    | 15                      | Pass    |
|         | 5376.8          | 5400      | 5397.00                      | -41.15               | 0.077                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 15676.8                      | -37.47               | 0.179                    | 2.50                    | Pass    |

**5.3G, Chain 1, 802.11ax20**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5200      | 5194.7                       | -37.70               | 0.170                    | 2.50                    | Pass    |
|         | 5200            | 5233.3    | 5218.30                      | -40.21               | 0.095                    | 2.50                    | Pass    |
|         | 5233.3          | 5240      | 5233.63                      | -42.68               | 0.054                    | 2.73                    | Pass    |
|         | 5240            | 5249      | 5248.96                      | -20.37               | 9.183                    | 99.18                   | Pass    |
|         | 5249            | 5249.8    | 5249.77                      | -7.87                | 163.305                  | 588.84                  | Pass    |
|         | 5249.8          | 5250      | 5249.81                      | -7.32                | 185.353                  | 670.91                  | Pass    |
|         | 5350            | 5400      | 5396.73                      | -41.74               | 0.067                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 19446.6                      | -37.06               | 0.197                    | 2.50                    | Pass    |
| Middle  | 30              | 5200      | 5182.55                      | -39.42               | 0.114                    | 2.50                    | Pass    |
|         | 5200            | 5233.3    | 5205.41                      | -41.14               | 0.077                    | 2.50                    | Pass    |
|         | 5233.3          | 5240      | 5233.67                      | -42.68               | 0.054                    | 2.76                    | Pass    |
|         | 5240            | 5249      | 5240.13                      | -43.13               | 0.049                    | 16.28                   | Pass    |
|         | 5249            | 5249.8    | 5249.05                      | -42.38               | 0.058                    | 112.20                  | Pass    |
|         | 5249.8          | 5250      | 5249.83                      | -42.36               | 0.058                    | 758.58                  | Pass    |
|         | 5350            | 5400      | 5398.22                      | -41.94               | 0.064                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 18470.2                      | -37.85               | 0.164                    | 2.50                    | Pass    |
| High    | 30              | 5200      | 5169.37                      | -39.01               | 0.126                    | 2.50                    | Pass    |
|         | 5200            | 5233.3    | 5225.26                      | -41.07               | 0.078                    | 2.50                    | Pass    |
|         | 5233.3          | 5240      | 5233.87                      | -41.97               | 0.064                    | 2.91                    | Pass    |
|         | 5240            | 5249      | 5241.14                      | -42.37               | 0.058                    | 20.01                   | Pass    |
|         | 5249            | 5249.8    | 5249.01                      | -42.71               | 0.054                    | 102.33                  | Pass    |
|         | 5249.8          | 5250      | 5249.83                      | -42.17               | 0.061                    | 758.58                  | Pass    |
|         | 5350            | 5400      | 5356.77                      | -40.60               | 0.087                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 15683                        | -36.32               | 0.233                    | 2.50                    | Pass    |

**5.3G, Chain 1, 802.11ax40**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5200      | 5192.89                      | -34.16               | 0.384                    | 2.50                    | Pass    |
|         | 5200            | 5221.6    | 5221.48                      | -41.22               | 0.076                    | 2.50                    | Pass    |
|         | 5221.6          | 5230      | 5223.28                      | -40.33               | 0.093                    | 3.13                    | Pass    |
|         | 5230            | 5249      | 5248.99                      | -22.25               | 5.957                    | 49.95                   | Pass    |
|         | 5249            | 5250      | 5249.92                      | -10.44               | 90.365                   | 415.88                  | Pass    |
|         | 5350            | 5358.4    | 5355.72                      | -41.18               | 0.076                    | 15                      | Pass    |
|         | 5358.4          | 5400      | 5368.82                      | -41.08               | 0.078                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 15978.6                      | -37.73               | 0.169                    | 2.50                    | Pass    |
| High    | 30              | 5200      | 5190.82                      | -36.45               | 0.226                    | 2.50                    | Pass    |
|         | 5200            | 5221.6    | 5217.27                      | -40.85               | 0.082                    | 2.50                    | Pass    |
|         | 5221.6          | 5230      | 5221.89                      | -41.29               | 0.074                    | 2.58                    | Pass    |
|         | 5230            | 5249      | 5230.90                      | -42.27               | 0.059                    | 8.65                    | Pass    |
|         | 5249            | 5250      | 5249.02                      | -42.67               | 0.054                    | 52.36                   | Pass    |
|         | 5350            | 5358.4    | 5354.43                      | -40.92               | 0.081                    | 15                      | Pass    |
|         | 5358.4          | 5400      | 5366.57                      | -41.88               | 0.065                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 5406.7                       | -36.37               | 0.231                    | 2.50                    | Pass    |

**5.3G, Chain 1, 802.11ax80**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Middle  | 30              | 5200      | 5183.59                      | -40.07               | 0.098                    | 2.50                    | Pass    |
|         | 5200            | 5203.3    | 5201.46                      | -40.39               | 0.091                    | 2.50                    | Pass    |
|         | 5203.3          | 5210      | 5204.96                      | -41.32               | 0.074                    | 2.80                    | Pass    |
|         | 5210            | 5249      | 5248.71                      | -21.93               | 6.412                    | 24.66                   | Pass    |
|         | 5249            | 5250      | 5249.00                      | -20.25               | 9.441                    | 25.00                   | Pass    |
|         | 5350            | 5376.8    | 5358.59                      | -41.43               | 0.072                    | 15                      | Pass    |
|         | 5376.8          | 5400      | 5396.79                      | -41.87               | 0.065                    | 2.50                    | Pass    |
|         | 5400            | 26000     | 17725.5                      | -37.56               | 0.175                    | 2.50                    | Pass    |

**5.3G, Chain 0+Chain 1, 802.11ac20**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                    | Limit<br>(μW/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------|-------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>(μW/MHz) |                   |         |
| Low     | 30              | 5200      | /                            | -36.20               | 0.240              | 2.50              | Pass    |
|         | 5200            | 5233.3    | 5230.95                      | -34.66               | 0.342              | 2.50              | Pass    |
|         | 5233.3          | 5240      | 5235.49                      | -30.02               | 0.995              | 4.56              | Pass    |
|         | 5240            | 5249      | 5248.97                      | -15.55               | 27.861             | 99.39             | Pass    |
|         | 5249            | 5250      | 5249.64                      | -5.29                | 295.801            | 436.52            | Pass    |
|         | 5350            | 5400      | 5392.27                      | -33.46               | 0.451              | 2.50              | Pass    |
|         | 5400            | 26000     | /                            | -35.34               | 0.292              | 2.50              | Pass    |
| Middle  | 30              | 5200      | /                            | -37.02               | 0.199              | 2.50              | Pass    |
|         | 5200            | 5233.3    | 5202.65                      | -34.93               | 0.321              | 2.50              | Pass    |
|         | 5233.3          | 5240      | 5233.35                      | -35.08               | 0.310              | 2.52              | Pass    |
|         | 5240            | 5249      | 5240.31                      | -34.58               | 0.348              | 16.89             | Pass    |
|         | 5249            | 5250      | 5249.08                      | -34.28               | 0.373              | 120.23            | Pass    |
|         | 5350            | 5400      | 5396.58                      | -34.79               | 0.332              | 2.50              | Pass    |
|         | 5400            | 26000     | /                            | -35.14               | 0.306              | 2.50              | Pass    |
| High    | 30              | 5200      | /                            | -37.18               | 0.191              | 2.50              | Pass    |
|         | 5200            | 5233.3    | 5232.72                      | -34.18               | 0.382              | 2.50              | Pass    |
|         | 5233.3          | 5240      | 5233.61                      | -34.96               | 0.319              | 2.71              | Pass    |
|         | 5240            | 5249      | 5240.09                      | -35.06               | 0.312              | 16.14             | Pass    |
|         | 5249            | 5250      | 5249.01                      | -35.66               | 0.272              | 102.33            | Pass    |
|         | 5350            | 5400      | 5351.22                      | -33.90               | 0.407              | 2.50              | Pass    |
|         | 5400            | 26000     | /                            | -34.20               | 0.380              | 2.50              | Pass    |

Note:

For 30-5200MHz, 5400-26000MHz:

Result (dBm/MHz) =  $10 \cdot \log\{10^{\lceil \text{Result (dBm/MHz)}_{\text{Chain0}} / 10 \rceil} + 10^{\lceil \text{Result (dBm/MHz)}_{\text{Chain1}} / 10 \rceil}\}$ Result (μW/MHz) =  $\{10^{\lceil \text{Result (dBm/MHz)} / 10 \rceil}\} \cdot 1000$

**5.3G, Chain 0+Chain 1, 802.11ac40**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                    | Limit<br>(μW/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------|-------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>(μW/MHz) |                   |         |
| Low     | 30              | 5200      | /                            | -30.87               | 0.818              | 2.50              | Pass    |
|         | 5200            | 5221.6    | 5218.87                      | -32.12               | 0.614              | 2.50              | Pass    |
|         | 5221.6          | 5230      | 5223.20                      | -28.50               | 1.413              | 3.10              | Pass    |
|         | 5230            | 5249      | 5248.97                      | -17.08               | 19.588             | 49.85             | Pass    |
|         | 5249            | 5250      | 5249.25                      | -12.49               | 56.364             | 88.91             | Pass    |
|         | 5350            | 5358.4    | 5357.86                      | -33.74               | 0.423              | 15                | Pass    |
|         | 5358.4          | 5400      | 5391.70                      | -34.07               | 0.392              | 2.50              | Pass    |
|         | 5400            | 26000     | /                            | -34.88               | 0.325              | 2.50              | Pass    |
| High    | 30              | 5200      | /                            | -33.47               | 0.450              | 2.50              | Pass    |
|         | 5200            | 5221.6    | 5201.95                      | -33.09               | 0.491              | 2.50              | Pass    |
|         | 5221.6          | 5230      | 5221.65                      | -33.92               | 0.406              | 2.50              | Pass    |
|         | 5230            | 5249      | 5231.05                      | -34.49               | 0.356              | 8.77              | Pass    |
|         | 5249            | 5250      | 5249.04                      | -34.12               | 0.387              | 54.82             | Pass    |
|         | 5350            | 5358.4    | 5351.86                      | -29.79               | 1.050              | 15                | Pass    |
|         | 5358.4          | 5400      | 5359.42                      | -30.85               | 0.822              | 2.50              | Pass    |
|         | 5400            | 26000     | /                            | -33.38               | 0.459              | 2.50              | Pass    |

Note:

For 30-5200MHz, 5400-26000MHz:

Result (dBm/MHz) =  $10 \cdot \log \{ 10^{\lceil \text{Result (dBm/MHz)}_{\text{Chain0}} / 10 \rceil} + 10^{\lceil \text{Result (dBm/MHz)}_{\text{Chain1}} / 10 \rceil} \}$ Result (μW/MHz) =  $\{ 10^{\lceil \text{Result (dBm/MHz)} / 10 \rceil} \} \cdot 1000$ **5.3G, Chain 0+Chain 1, 802.11ac80**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                    | Limit<br>(μW/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------|-------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>(μW/MHz) |                   |         |
| Middle  | 30              | 5200      | /                            | -37.56               | 0.175              | 2.50              | Pass    |
|         | 5200            | 5203.3    | 5200.28                      | -33.53               | 0.444              | 2.50              | Pass    |
|         | 5203.3          | 5210      | 5204.22                      | -32.91               | 0.512              | 2.66              | Pass    |
|         | 5210            | 5249      | 5248.82                      | -17.35               | 18.408             | 24.79             | Pass    |
|         | 5249            | 5250      | 5249.04                      | -16.28               | 23.550             | 27.41             | Pass    |
|         | 5350            | 5376.8    | 5352.24                      | -33.67               | 0.430              | 15                | Pass    |
|         | 5376.8          | 5400      | 5398.25                      | -34.14               | 0.385              | 2.50              | Pass    |
|         | 5400            | 26000     | /                            | -34.94               | 0.321              | 2.50              | Pass    |

Note:

For 30-5200MHz, 5400-26000MHz:

Result (dBm/MHz) =  $10 \cdot \log \{ 10^{\lceil \text{Result (dBm/MHz)}_{\text{Chain0}} / 10 \rceil} + 10^{\lceil \text{Result (dBm/MHz)}_{\text{Chain1}} / 10 \rceil} \}$ Result (μW/MHz) =  $\{ 10^{\lceil \text{Result (dBm/MHz)} / 10 \rceil} \} \cdot 1000$

**5.3G, Chain 0+Chain 1, 802.11ax20**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                    | Limit<br>(μW/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------|-------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>(μW/MHz) |                   |         |
| Low     | 30              | 5200      | /                            | -33.95               | 0.403              | 2.50              | Pass    |
|         | 5200            | 5233.3    | 5223.09                      | -34.44               | 0.360              | 2.50              | Pass    |
|         | 5233.3          | 5240      | 5234.07                      | -33.96               | 0.402              | 3.08              | Pass    |
|         | 5240            | 5249      | 5248.82                      | -16.88               | 20.512             | 96.38             | Pass    |
|         | 5249            | 5249.8    | 5249.75                      | -3.11                | 488.652            | 562.34            | Pass    |
|         | 5249.8          | 5250      | 5249.82                      | -2.51                | 561.048            | 713.40            | Pass    |
|         | 5350            | 5400      | 5371.92                      | -34.15               | 0.385              | 2.50              | Pass    |
|         | 5400            | 26000     | /                            | -34.45               | 0.359              | 2.50              | Pass    |
| Middle  | 30              | 5200      | /                            | -37.01               | 0.199              | 2.50              | Pass    |
|         | 5200            | 5233.3    | 5203.08                      | -33.82               | 0.415              | 2.50              | Pass    |
|         | 5233.3          | 5240      | 5233.33                      | -35.05               | 0.313              | 2.51              | Pass    |
|         | 5240            | 5249      | 5240.26                      | -34.78               | 0.333              | 16.72             | Pass    |
|         | 5249            | 5249.8    | 5249.04                      | -34.39               | 0.364              | 109.65            | Pass    |
|         | 5249.8          | 5250      | 5249.80                      | -35.16               | 0.305              | 630.96            | Pass    |
|         | 5350            | 5400      | 5373.28                      | -34.02               | 0.396              | 2.50              | Pass    |
|         | 5400            | 26000     | /                            | -35.04               | 0.313              | 2.50              | Pass    |
| High    | 30              | 5200      | /                            | -35.44               | 0.286              | 2.50              | Pass    |
|         | 5200            | 5233.3    | 5204.41                      | -34.04               | 0.394              | 2.50              | Pass    |
|         | 5233.3          | 5240      | 5233.80                      | -34.86               | 0.327              | 2.86              | Pass    |
|         | 5240            | 5249      | 5240.07                      | -34.96               | 0.319              | 16.08             | Pass    |
|         | 5249            | 5249.8    | 5249.02                      | -35.00               | 0.316              | 104.71            | Pass    |
|         | 5249.8          | 5250      | 5249.82                      | -34.88               | 0.325              | 713.40            | Pass    |
|         | 5350            | 5400      | 5399.28                      | -33.68               | 0.429              | 2.50              | Pass    |
|         | 5400            | 26000     | /                            | -34.14               | 0.385              | 2.50              | Pass    |

Note:

For 30-5200MHz, 5400-26000MHz:

Result (dBm/MHz) =  $10 \cdot \log\{10^{\lfloor \text{Result (dBm/MHz)}_{\text{Chain0}}/10 \rfloor} + 10^{\lfloor \text{Result (dBm/MHz)}_{\text{Chain1}}/10 \rfloor}\}$ Result (μW/MHz) =  $\{10^{\lfloor \text{Result (dBm/MHz)}/10 \rfloor}\} \cdot 1000$

**5.3G, Chain 0+Chain 1, 802.11ax40**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                    | Limit<br>(μW/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------|-------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>(μW/MHz) |                   |         |
| Low     | 30              | 5200      | /                            | -31.63               | 0.687              | 2.50              | Pass    |
|         | 5200            | 5221.6    | 5221.07                      | -33.25               | 0.473              | 2.50              | Pass    |
|         | 5221.6          | 5230      | 5222.47                      | -33.59               | 0.438              | 2.80              | Pass    |
|         | 5230            | 5249      | 5248.99                      | -19.84               | 10.375             | 49.95             | Pass    |
|         | 5249            | 5250      | 5249.99                      | -6.34                | 232.274            | 488.62            | Pass    |
|         | 5350            | 5358.4    | 5354.80                      | -33.59               | 0.438              | 15                | Pass    |
|         | 5358.4          | 5400      | 5397.90                      | -33.64               | 0.433              | 2.50              | Pass    |
|         | 5400            | 26000     | /                            | -35.22               | 0.301              | 2.50              | Pass    |
| High    | 30              | 5200      | /                            | -34                  | 0.398              | 2.50              | Pass    |
|         | 5200            | 5221.6    | 5208.52                      | -33.92               | 0.406              | 2.50              | Pass    |
|         | 5221.6          | 5230      | 5223.07                      | -33.55               | 0.442              | 3.04              | Pass    |
|         | 5230            | 5249      | 5230.81                      | -34.61               | 0.346              | 8.57              | Pass    |
|         | 5249            | 5250      | 5249.02                      | -34.86               | 0.327              | 52.36             | Pass    |
|         | 5350            | 5358.4    | 5351.52                      | -32.65               | 0.543              | 15                | Pass    |
|         | 5358.4          | 5400      | 5379.89                      | -32.97               | 0.505              | 2.50              | Pass    |
|         | 5400            | 26000     | /                            | -34.36               | 0.366              | 2.50              | Pass    |

Note:

For 30-5200MHz, 5400-26000MHz:

Result (dBm/MHz) =  $10 \cdot \log \{ 10^{\text{Result (dBm/MHz) Chain0 / 10}} + 10^{\text{Result (dBm/MHz) Chain1 / 10}} \}$ Result (μW/MHz) =  $\{ 10^{\text{Result (dBm/MHz) / 10}} \} \cdot 1000$ **5.3G, Chain 0+Chain 1, 802.11ax80**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                    | Limit<br>(μW/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------|-------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>(μW/MHz) |                   |         |
| Middle  | 30              | 5200      | /                            | -37.56               | 0.175              | 2.50              | Pass    |
|         | 5200            | 5203.3    | 5202.01                      | -33.73               | 0.424              | 2.50              | Pass    |
|         | 5203.3          | 5210      | 5204.32                      | -34.10               | 0.389              | 2.68              | Pass    |
|         | 5210            | 5249      | 5248.82                      | -18.64               | 13.677             | 24.79             | Pass    |
|         | 5249            | 5250      | 5249.01                      | -17.20               | 19.055             | 25.58             | Pass    |
|         | 5350            | 5376.8    | 5357.41                      | -33.89               | 0.408              | 15                | Pass    |
|         | 5376.8          | 5400      | 5381.54                      | -33.95               | 0.403              | 2.50              | Pass    |
|         | 5400            | 26000     | /                            | -35.19               | 0.303              | 2.50              | Pass    |

Note:

For 30-5200MHz, 5400-26000MHz:

Result (dBm/MHz) =  $10 \cdot \log \{ 10^{\text{Result (dBm/MHz) Chain0 / 10}} + 10^{\text{Result (dBm/MHz) Chain1 / 10}} \}$ Result (μW/MHz) =  $\{ 10^{\text{Result (dBm/MHz) / 10}} \} \cdot 1000$

**5.6G, Chain 0, 802.11a**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5300      | 5210.81                      | -38.86               | 0.130                    | 2.50                    | Pass    |
|         | 5300            | 5460      | 5457.84                      | -32.39               | 0.577                    | 2.50                    | Pass    |
|         | 5460            | 5470      | 5469.13                      | -27.18               | 1.914                    | 12.50                   | Pass    |
|         | 5745            | 5765      | 5750.79                      | -39.46               | 0.113                    | 12.50                   | Pass    |
|         | 5765            | 5900      | 5830.81                      | -39.09               | 0.123                    | 2.50                    | Pass    |
|         | 5900            | 26000     | 15978.6                      | -36.87               | 0.206                    | 2.50                    | Pass    |
| Middle  | 30              | 5300      | 5154.15                      | -38.78               | 0.132                    | 2.50                    | Pass    |
|         | 5300            | 5460      | 5457.20                      | -40.00               | 0.100                    | 2.50                    | Pass    |
|         | 5460            | 5470      | 5464.07                      | -39.35               | 0.116                    | 12.50                   | Pass    |
|         | 5745            | 5765      | 5746.89                      | -38.52               | 0.141                    | 12.50                   | Pass    |
|         | 5765            | 5900      | 5818.26                      | -38.63               | 0.137                    | 2.50                    | Pass    |
|         | 5900            | 26000     | 16402.8                      | -36.19               | 0.240                    | 2.50                    | Pass    |
| High    | 30              | 5300      | 5104.09                      | -39.44               | 0.114                    | 2.50                    | Pass    |
|         | 5300            | 5460      | 5445.36                      | -40.22               | 0.095                    | 2.50                    | Pass    |
|         | 5460            | 5470      | 5462.47                      | -40.28               | 0.094                    | 12.50                   | Pass    |
|         | 5745            | 5765      | 5745.31                      | -27.18               | 1.914                    | 12.50                   | Pass    |
|         | 5765            | 5900      | 5852.14                      | -37.42               | 0.181                    | 2.50                    | Pass    |
|         | 5900            | 26000     | 15680.2                      | -36.69               | 0.214                    | 2.50                    | Pass    |

**5.6G, Chain 0, 802.11ac20**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5300      | 5147.83                      | -39.00               | 0.126                    | 2.50                    | Pass    |
|         | 5300            | 5460      | 5459.92                      | -31.07               | 0.782                    | 2.50                    | Pass    |
|         | 5460            | 5470      | 5469.11                      | -29.00               | 1.259                    | 12.50                   | Pass    |
|         | 5745            | 5765      | 5761.97                      | -39.66               | 0.108                    | 12.50                   | Pass    |
|         | 5765            | 5900      | 5819.74                      | -39.31               | 0.117                    | 2.50                    | Pass    |
|         | 5900            | 26000     | 15648                        | -36.38               | 0.230                    | 2.50                    | Pass    |
| Middle  | 30              | 5300      | 4336.51                      | -39.64               | 0.109                    | 2.50                    | Pass    |
|         | 5300            | 5460      | 5454.48                      | -39.54               | 0.111                    | 2.50                    | Pass    |
|         | 5460            | 5470      | 5465.76                      | -39.18               | 0.121                    | 12.50                   | Pass    |
|         | 5745            | 5765      | 5755.06                      | -37.71               | 0.169                    | 12.50                   | Pass    |
|         | 5765            | 5900      | 5795.31                      | -36.89               | 0.205                    | 2.50                    | Pass    |
|         | 5900            | 26000     | 15764.6                      | -36.73               | 0.212                    | 2.50                    | Pass    |
| High    | 30              | 5300      | 5075.1                       | -39.02               | 0.125                    | 2.50                    | Pass    |
|         | 5300            | 5460      | 5435.60                      | -40.94               | 0.081                    | 2.50                    | Pass    |
|         | 5460            | 5470      | 5466.04                      | -40.13               | 0.097                    | 12.50                   | Pass    |
|         | 5745            | 5765      | 5746.76                      | -36.50               | 0.224                    | 12.50                   | Pass    |
|         | 5765            | 5900      | 5809.62                      | -37.11               | 0.195                    | 2.50                    | Pass    |
|         | 5900            | 26000     | 16378.6                      | -36.81               | 0.208                    | 2.50                    | Pass    |

**5.6G, Chain 0, 802.11ac40**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5300      | 5147.3                       | -38.99               | 0.126                    | 12.50                   | Pass    |
|         | 5300            | 5460      | 5457.84                      | -31.01               | 0.793                    | 12.50                   | Pass    |
|         | 5460            | 5470      | 5468.56                      | -26.62               | 2.178                    | 50                      | Pass    |
|         | 5770            | 5900      | 5841.18                      | -38.59               | 0.138                    | 12.50                   | Pass    |
|         | 5900            | 26000     | 15665.1                      | -36.65               | 0.216                    | 12.50                   | Pass    |
| Middle  | 30              | 5300      | 4471.95                      | -38.46               | 0.143                    | 12.50                   | Pass    |
|         | 5300            | 5460      | 5439.28                      | -40.06               | 0.099                    | 12.50                   | Pass    |
|         | 5460            | 5470      | 5466.36                      | -39.43               | 0.114                    | 50                      | Pass    |
|         | 5770            | 5900      | 5779.30                      | -38.35               | 0.146                    | 12.50                   | Pass    |
|         | 5900            | 26000     | 15616.8                      | -36.29               | 0.235                    | 12.50                   | Pass    |
| High    | 30              | 5300      | 4568.13                      | -39.03               | 0.125                    | 12.50                   | Pass    |
|         | 5300            | 5460      | 5445.68                      | -40.32               | 0.093                    | 12.50                   | Pass    |
|         | 5460            | 5470      | 5466.04                      | -40.01               | 0.100                    | 50                      | Pass    |
|         | 5770            | 5900      | 5787.74                      | -36.43               | 0.228                    | 12.50                   | Pass    |
|         | 5900            | 26000     | 5902.5                       | -35.99               | 0.252                    | 12.50                   | Pass    |

**5.6G, Chain 0, 802.11ac80**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5300      | 4379.99                      | -39.67               | 0.108                    | 12.50                   | Pass    |
|         | 5300            | 5460      | 5454.00                      | -31.37               | 0.729                    | 12.50                   | Pass    |
|         | 5460            | 5469.5    | 5468.74                      | -27.41               | 1.816                    | 50                      | Pass    |
|         | 5469.5          | 5470      | 5469.95                      | -26.72               | 2.128                    | 51.20                   | Pass    |
|         | 5770            | 5900      | 5864.31                      | -39.18               | 0.121                    | 12.50                   | Pass    |
|         | 5900            | 26000     | 19446.9                      | -36.45               | 0.226                    | 12.50                   | Pass    |
| Middle  | 30              | 5300      | 4448.76                      | -39.64               | 0.109                    | 12.50                   | Pass    |
|         | 5300            | 5460      | 5446.16                      | -37.66               | 0.171                    | 12.50                   | Pass    |
|         | 5460            | 5469.5    | 5466.56                      | -35.65               | 0.272                    | 50                      | Pass    |
|         | 5469.5          | 5470      | 5469.89                      | -35.28               | 0.296                    | 51.20                   | Pass    |
|         | 5770            | 5900      | 5847.03                      | -37.99               | 0.159                    | 12.50                   | Pass    |
|         | 5900            | 26000     | 15681.2                      | -35.90               | 0.257                    | 12.50                   | Pass    |
| High    | 30              | 5300      | 5267.98                      | -39.51               | 0.112                    | 12.50                   | Pass    |
|         | 5300            | 5460      | 5372.40                      | -38.86               | 0.130                    | 12.50                   | Pass    |
|         | 5460            | 5469.5    | 5466.46                      | -40.04               | 0.099                    | 50                      | Pass    |
|         | 5469.5          | 5470      | 5469.91                      | -37.95               | 0.160                    | 51.20                   | Pass    |
|         | 5770            | 5900      | 5779.81                      | -34.85               | 0.327                    | 12.50                   | Pass    |
|         | 5900            | 26000     | 15707.3                      | -35.95               | 0.254                    | 12.50                   | Pass    |

**5.6G, Chain 0, 802.11ax20**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5300      | 5182.61                      | -39.41               | 0.115                    | 2.50                    | Pass    |
|         | 5300            | 5460      | 5459.44                      | -39.12               | 0.122                    | 2.50                    | Pass    |
|         | 5460            | 5470      | 5469.73                      | -36.85               | 0.207                    | 12.50                   | Pass    |
|         | 5745            | 5765      | 5753.52                      | -38.77               | 0.133                    | 12.50                   | Pass    |
|         | 5765            | 5900      | 5880.63                      | -38.89               | 0.129                    | 2.50                    | Pass    |
|         | 5900            | 26000     | 17701.2                      | -36.10               | 0.245                    | 2.50                    | Pass    |
| Middle  | 30              | 5300      | 5186.3                       | -39.43               | 0.114                    | 2.50                    | Pass    |
|         | 5300            | 5460      | 5433.68                      | -39.91               | 0.102                    | 2.50                    | Pass    |
|         | 5460            | 5470      | 5463.54                      | -40.24               | 0.095                    | 12.50                   | Pass    |
|         | 5745            | 5765      | 5763.70                      | -38.61               | 0.138                    | 12.50                   | Pass    |
|         | 5765            | 5900      | 5883.46                      | -38.58               | 0.139                    | 2.50                    | Pass    |
|         | 5900            | 26000     | 15679.2                      | -36.22               | 0.239                    | 2.50                    | Pass    |
| High    | 30              | 5300      | 4480.65                      | -39.50               | 0.112                    | 2.50                    | Pass    |
|         | 5300            | 5460      | 5406.16                      | -40.30               | 0.093                    | 2.50                    | Pass    |
|         | 5460            | 5470      | 5462.47                      | -39.31               | 0.117                    | 12.50                   | Pass    |
|         | 5745            | 5765      | 5745.97                      | -36.39               | 0.230                    | 12.50                   | Pass    |
|         | 5765            | 5900      | 5862.67                      | -38.66               | 0.136                    | 2.50                    | Pass    |
|         | 5900            | 26000     | 15686.2                      | -35.88               | 0.258                    | 2.50                    | Pass    |

**5.6G, Chain 0, 802.11ax40**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5300      | 4354.96                      | -38.98               | 0.126                    | 12.50                   | Pass    |
|         | 5300            | 5460      | 5456.88                      | -28.42               | 1.439                    | 12.50                   | Pass    |
|         | 5460            | 5470      | 5469.30                      | -24.05               | 3.936                    | 50                      | Pass    |
|         | 5770            | 5900      | 5846.64                      | -38.69               | 0.135                    | 12.50                   | Pass    |
|         | 5900            | 26000     | 16675.1                      | -36.04               | 0.249                    | 12.50                   | Pass    |
| Middle  | 30              | 5300      | 4471.95                      | -38.96               | 0.127                    | 12.50                   | Pass    |
|         | 5300            | 5460      | 5446.16                      | -40.32               | 0.093                    | 12.50                   | Pass    |
|         | 5460            | 5470      | 5464.93                      | -37.53               | 0.177                    | 50                      | Pass    |
|         | 5770            | 5900      | 5806.33                      | -37.89               | 0.163                    | 12.50                   | Pass    |
|         | 5900            | 26000     | 15699.3                      | -36.36               | 0.231                    | 12.50                   | Pass    |
| High    | 30              | 5300      | 4368.4                       | -38.99               | 0.126                    | 12.50                   | Pass    |
|         | 5300            | 5460      | 5408.88                      | -40.86               | 0.082                    | 12.50                   | Pass    |
|         | 5460            | 5470      | 5461.60                      | -39.97               | 0.101                    | 50                      | Pass    |
|         | 5770            | 5900      | 5781.77                      | -36.10               | 0.245                    | 12.50                   | Pass    |
|         | 5900            | 26000     | 19843.9                      | -35.97               | 0.253                    | 12.50                   | Pass    |

**5.6G, Chain 0, 802.11ax80**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5300      | 4766.81                      | -39.63               | 0.109                    | 12.50                   | Pass    |
|         | 5300            | 5460      | 5432.24                      | -30.71               | 0.849                    | 12.50                   | Pass    |
|         | 5460            | 5469.5    | 5461.55                      | -29.55               | 1.109                    | 50                      | Pass    |
|         | 5469.5          | 5470      | 5469.80                      | -29.30               | 1.175                    | 51.20                   | Pass    |
|         | 5770            | 5900      | 5820.11                      | -39.09               | 0.123                    | 12.50                   | Pass    |
|         | 5900            | 26000     | 15987.7                      | -36.85               | 0.207                    | 12.50                   | Pass    |
| Middle  | 30              | 5300      | 838.02                       | -35.47               | 0.284                    | 12.50                   | Pass    |
|         | 5300            | 5460      | 5458.96                      | -36.23               | 0.238                    | 12.50                   | Pass    |
|         | 5460            | 5469.5    | 5468.93                      | -34.00               | 0.398                    | 50                      | Pass    |
|         | 5469.5          | 5470      | 5469.56                      | -34.93               | 0.321                    | 51.20                   | Pass    |
|         | 5770            | 5900      | 5806.20                      | -38.79               | 0.132                    | 12.50                   | Pass    |
|         | 5900            | 26000     | 15794.7                      | -36.32               | 0.233                    | 12.50                   | Pass    |
| High    | 30              | 5300      | 837.76                       | -36.23               | 0.238                    | 12.50                   | Pass    |
|         | 5300            | 5460      | 5412.08                      | -40.62               | 0.087                    | 12.50                   | Pass    |
|         | 5460            | 5469.5    | 5465.10                      | -38.58               | 0.139                    | 50                      | Pass    |
|         | 5469.5          | 5470      | 5469.92                      | -39.15               | 0.122                    | 51.20                   | Pass    |
|         | 5770            | 5900      | 5774.88                      | -34.87               | 0.326                    | 12.50                   | Pass    |
|         | 5900            | 26000     | 15693.2                      | -36.13               | 0.244                    | 12.50                   | Pass    |

**5.6G, Chain 1, 802.11a**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5300      | 5192.36                      | -39.90               | 0.102                    | 2.50                    | Pass    |
|         | 5300            | 5460      | 5455.28                      | -27.58               | 1.746                    | 2.50                    | Pass    |
|         | 5460            | 5470      | 5469.58                      | -25.90               | 2.570                    | 12.50                   | Pass    |
|         | 5745            | 5765      | 5753.78                      | -39.48               | 0.113                    | 12.50                   | Pass    |
|         | 5765            | 5900      | 5836.75                      | -39.28               | 0.118                    | 2.50                    | Pass    |
|         | 5900            | 26000     | 17714.3                      | -36.63               | 0.217                    | 2.50                    | Pass    |
| Middle  | 30              | 5300      | 4480.12                      | -40.03               | 0.099                    | 2.50                    | Pass    |
|         | 5300            | 5460      | 5446.64                      | -40.38               | 0.092                    | 2.50                    | Pass    |
|         | 5460            | 5470      | 5462.35                      | -39.18               | 0.121                    | 12.50                   | Pass    |
|         | 5745            | 5765      | 5760.48                      | -38.51               | 0.141                    | 12.50                   | Pass    |
|         | 5765            | 5900      | 5801.11                      | -38.65               | 0.136                    | 2.50                    | Pass    |
|         | 5900            | 26000     | 15660.1                      | -37.30               | 0.186                    | 2.50                    | Pass    |
| High    | 30              | 5300      | 4659.56                      | -40.45               | 0.090                    | 2.50                    | Pass    |
|         | 5300            | 5460      | 5449.84                      | -40.01               | 0.100                    | 2.50                    | Pass    |
|         | 5460            | 5470      | 5468.53                      | -40.92               | 0.081                    | 12.50                   | Pass    |
|         | 5745            | 5765      | 5745.35                      | -27.27               | 1.875                    | 12.50                   | Pass    |
|         | 5765            | 5900      | 5769.79                      | -37.25               | 0.188                    | 2.50                    | Pass    |
|         | 5900            | 26000     | 15634.9                      | -36.82               | 0.208                    | 2.50                    | Pass    |

**5.6G, Chain 1, 802.11ac20**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5300      | 4400.02                      | -39.68               | 0.108                    | 2.50                    | Pass    |
|         | 5300            | 5460      | 5459.44                      | -38.30               | 0.148                    | 2.50                    | Pass    |
|         | 5460            | 5470      | 5468.19                      | -35.54               | 0.279                    | 12.50                   | Pass    |
|         | 5745            | 5765      | 5746.31                      | -38.81               | 0.132                    | 12.50                   | Pass    |
|         | 5765            | 5900      | 5864.83                      | -39.19               | 0.121                    | 2.50                    | Pass    |
|         | 5900            | 26000     | 15699.3                      | -36.86               | 0.206                    | 2.50                    | Pass    |
| Middle  | 30              | 5300      | 4956.26                      | -40.11               | 0.097                    | 2.50                    | Pass    |
|         | 5300            | 5460      | 5449.04                      | -39.44               | 0.114                    | 2.50                    | Pass    |
|         | 5460            | 5470      | 5466.55                      | -38.51               | 0.141                    | 12.50                   | Pass    |
|         | 5745            | 5765      | 5746.25                      | -38.15               | 0.153                    | 12.50                   | Pass    |
|         | 5765            | 5900      | 5875.50                      | -38.29               | 0.148                    | 2.50                    | Pass    |
|         | 5900            | 26000     | 15945.5                      | -37.38               | 0.183                    | 2.50                    | Pass    |
| High    | 30              | 5300      | 4991.57                      | -40.36               | 0.092                    | 2.50                    | Pass    |
|         | 5300            | 5460      | 5453.36                      | -39.94               | 0.101                    | 2.50                    | Pass    |
|         | 5460            | 5470      | 5460.45                      | -39.32               | 0.117                    | 12.50                   | Pass    |
|         | 5745            | 5765      | 5746.12                      | -27.68               | 1.706                    | 12.50                   | Pass    |
|         | 5765            | 5900      | 5768.85                      | -37.40               | 0.182                    | 2.50                    | Pass    |
|         | 5900            | 26000     | 17766.5                      | -37.13               | 0.194                    | 2.50                    | Pass    |

**5.6G, Chain 1, 802.11ac40**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5300      | 5069.83                      | -39.63               | 0.109                    | 12.50                   | Pass    |
|         | 5300            | 5460      | 5456.56                      | -33.39               | 0.458                    | 12.50                   | Pass    |
|         | 5460            | 5470      | 5469.41                      | -29.40               | 1.148                    | 50                      | Pass    |
|         | 5770            | 5900      | 5892.79                      | -38.54               | 0.140                    | 12.50                   | Pass    |
|         | 5900            | 26000     | 14736.5                      | -37.08               | 0.196                    | 12.50                   | Pass    |
| Middle  | 30              | 5300      | 4471.95                      | -40.10               | 0.098                    | 12.50                   | Pass    |
|         | 5300            | 5460      | 5445.04                      | -38.87               | 0.130                    | 12.50                   | Pass    |
|         | 5460            | 5470      | 5468.70                      | -38.42               | 0.144                    | 50                      | Pass    |
|         | 5770            | 5900      | 5773.58                      | -38.64               | 0.137                    | 12.50                   | Pass    |
|         | 5900            | 26000     | 14692.2                      | -37.40               | 0.182                    | 12.50                   | Pass    |
| High    | 30              | 5300      | 4227.69                      | -39.99               | 0.100                    | 12.50                   | Pass    |
|         | 5300            | 5460      | 5430.80                      | -40.31               | 0.093                    | 12.50                   | Pass    |
|         | 5460            | 5470      | 5463.56                      | -38.95               | 0.127                    | 50                      | Pass    |
|         | 5770            | 5900      | 5773.32                      | -36.08               | 0.247                    | 12.50                   | Pass    |
|         | 5900            | 26000     | 19449.9                      | -37.41               | 0.182                    | 12.50                   | Pass    |

**5.6G, Chain 1, 802.11ac80**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5300      | 5149.15                      | -39.20               | 0.120                    | 12.50                   | Pass    |
|         | 5300            | 5460      | 5459.76                      | -31.74               | 0.670                    | 12.50                   | Pass    |
|         | 5460            | 5469.5    | 5461.68                      | -30.61               | 0.869                    | 50                      | Pass    |
|         | 5469.5          | 5470      | 5469.71                      | -29.71               | 1.069                    | 51.20                   | Pass    |
|         | 5770            | 5900      | 5786.19                      | -38.03               | 0.157                    | 12.50                   | Pass    |
|         | 5900            | 26000     | 16401.7                      | -37.04               | 0.198                    | 12.50                   | Pass    |
| Middle  | 30              | 5300      | 4352.32                      | -40.25               | 0.094                    | 12.50                   | Pass    |
|         | 5300            | 5460      | 5459.92                      | -36.05               | 0.248                    | 12.50                   | Pass    |
|         | 5460            | 5469.5    | 5466.49                      | -35.00               | 0.316                    | 50                      | Pass    |
|         | 5469.5          | 5470      | 5469.90                      | -33.79               | 0.418                    | 51.20                   | Pass    |
|         | 5770            | 5900      | 5792.42                      | -36.53               | 0.222                    | 12.50                   | Pass    |
|         | 5900            | 26000     | 15663.1                      | -36.83               | 0.207                    | 12.50                   | Pass    |
| High    | 30              | 5300      | 4323.07                      | -40.60               | 0.087                    | 12.50                   | Pass    |
|         | 5300            | 5460      | 5450.48                      | -40.56               | 0.088                    | 12.50                   | Pass    |
|         | 5460            | 5469.5    | 5464.68                      | -39.41               | 0.115                    | 50                      | Pass    |
|         | 5469.5          | 5470      | 5469.54                      | -38.89               | 0.129                    | 51.20                   | Pass    |
|         | 5770            | 5900      | 5786.70                      | -33.38               | 0.459                    | 12.50                   | Pass    |
|         | 5900            | 26000     | 15709.3                      | -37.04               | 0.198                    | 12.50                   | Pass    |

**5.6G, Chain 1, 802.11ax20**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5300      | 4400.54                      | -39.85               | 0.104                    | 2.50                    | Pass    |
|         | 5300            | 5460      | 5458.96                      | -39.17               | 0.121                    | 2.50                    | Pass    |
|         | 5460            | 5470      | 5469.58                      | -37.27               | 0.187                    | 12.50                   | Pass    |
|         | 5745            | 5765      | 5756.75                      | -38.86               | 0.130                    | 12.50                   | Pass    |
|         | 5765            | 5900      | 5881.71                      | -39.00               | 0.126                    | 2.50                    | Pass    |
|         | 5900            | 26000     | 17750.5                      | -36.97               | 0.201                    | 2.50                    | Pass    |
| Middle  | 30              | 5300      | 5287.48                      | -39.45               | 0.114                    | 2.50                    | Pass    |
|         | 5300            | 5460      | 5429.84                      | -39.17               | 0.121                    | 2.50                    | Pass    |
|         | 5460            | 5470      | 5465.50                      | -38.43               | 0.144                    | 12.50                   | Pass    |
|         | 5745            | 5765      | 5747.36                      | -37.88               | 0.163                    | 12.50                   | Pass    |
|         | 5765            | 5900      | 5825.28                      | -38.39               | 0.145                    | 2.50                    | Pass    |
|         | 5900            | 26000     | 15690.2                      | -37.41               | 0.182                    | 2.50                    | Pass    |
| High    | 30              | 5300      | 5183.66                      | -40.20               | 0.095                    | 2.50                    | Pass    |
|         | 5300            | 5460      | 5416.56                      | -40.67               | 0.086                    | 2.50                    | Pass    |
|         | 5460            | 5470      | 5467.47                      | -40.05               | 0.099                    | 12.50                   | Pass    |
|         | 5745            | 5765      | 5746.14                      | -35.81               | 0.262                    | 12.50                   | Pass    |
|         | 5765            | 5900      | 5861.59                      | -37.73               | 0.169                    | 2.50                    | Pass    |
|         | 5900            | 26000     | 15714.3                      | -37.08               | 0.196                    | 2.50                    | Pass    |

**5.6G, Chain 1, 802.11ax40**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5300      | 4408.45                      | -40.02               | 0.100                    | 12.50                   | Pass    |
|         | 5300            | 5460      | 5454.00                      | -28.39               | 1.449                    | 12.50                   | Pass    |
|         | 5460            | 5470      | 5466.85                      | -26.86               | 2.061                    | 50                      | Pass    |
|         | 5770            | 5900      | 5854.30                      | -38.99               | 0.126                    | 12.50                   | Pass    |
|         | 5900            | 26000     | 16505.3                      | -37.56               | 0.175                    | 12.50                   | Pass    |
| Middle  | 30              | 5300      | 5166.8                       | -39.87               | 0.103                    | 12.50                   | Pass    |
|         | 5300            | 5460      | 5446.16                      | -39.20               | 0.120                    | 12.50                   | Pass    |
|         | 5460            | 5470      | 5469.45                      | -34.90               | 0.324                    | 50                      | Pass    |
|         | 5770            | 5900      | 5802.44                      | -38.09               | 0.155                    | 12.50                   | Pass    |
|         | 5900            | 26000     | 16427.9                      | -37.46               | 0.179                    | 12.50                   | Pass    |
| High    | 30              | 5300      | 4423.2                       | -40.50               | 0.089                    | 12.50                   | Pass    |
|         | 5300            | 5460      | 5384.24                      | -41.05               | 0.079                    | 12.50                   | Pass    |
|         | 5460            | 5470      | 5460.11                      | -40.25               | 0.094                    | 50                      | Pass    |
|         | 5770            | 5900      | 5775.14                      | -32.77               | 0.528                    | 12.50                   | Pass    |
|         | 5900            | 26000     | 17736.4                      | -37.14               | 0.193                    | 12.50                   | Pass    |

**5.6G, Chain 1, 802.11ax80**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                          | Limit<br>( $\mu$ W/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------------|-------------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>( $\mu$ W/MHz) |                         |         |
| Low     | 30              | 5300      | 837.23                       | -35.20               | 0.302                    | 12.50                   | Pass    |
|         | 5300            | 5460      | 5458.80                      | -26.27               | 2.360                    | 12.50                   | Pass    |
|         | 5460            | 5469.5    | 5469.40                      | -23.56               | 4.406                    | 50                      | Pass    |
|         | 5469.5          | 5470      | 5469.51                      | -22.87               | 5.164                    | 51.20                   | Pass    |
|         | 5770            | 5900      | 5770.46                      | -38.18               | 0.152                    | 12.50                   | Pass    |
|         | 5900            | 26000     | 15654                        | -36.63               | 0.217                    | 12.50                   | Pass    |
| Middle  | 30              | 5300      | 829.85                       | -39.51               | 0.112                    | 12.50                   | Pass    |
|         | 5300            | 5460      | 5457.20                      | -37.80               | 0.166                    | 12.50                   | Pass    |
|         | 5460            | 5469.5    | 5468.35                      | -36.13               | 0.244                    | 50                      | Pass    |
|         | 5469.5          | 5470      | 5469.77                      | -34.20               | 0.380                    | 51.20                   | Pass    |
|         | 5770            | 5900      | 5786.57                      | -38.47               | 0.142                    | 12.50                   | Pass    |
|         | 5900            | 26000     | 15748.5                      | -37.51               | 0.177                    | 12.50                   | Pass    |
| High    | 30              | 5300      | 5257.18                      | -39.87               | 0.103                    | 12.50                   | Pass    |
|         | 5300            | 5460      | 5375.12                      | -39.71               | 0.107                    | 12.50                   | Pass    |
|         | 5460            | 5469.5    | 5466.83                      | -39.38               | 0.115                    | 50                      | Pass    |
|         | 5469.5          | 5470      | 5469.62                      | -38.05               | 0.157                    | 51.20                   | Pass    |
|         | 5770            | 5900      | 5793.08                      | -34.11               | 0.388                    | 12.50                   | Pass    |
|         | 5900            | 26000     | 15687.2                      | -37.25               | 0.188                    | 12.50                   | Pass    |

**5.6G, Chain 0+Chain 1, 802.11ac20**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                    | Limit<br>(μW/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------|-------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>(μW/MHz) |                   |         |
| Low     | 30              | 5300      | /                            | -36.32               | 0.233              | 2.50              | Pass    |
|         | 5300            | 5460      | 5451.92                      | -31.80               | 0.661              | 2.50              | Pass    |
|         | 5460            | 5470      | 5468.11                      | -27.18               | 1.914              | 12.50             | Pass    |
|         | 5745            | 5765      | 5756.68                      | -30.83               | 0.826              | 12.50             | Pass    |
|         | 5765            | 5900      | 5887.78                      | -30.76               | 0.839              | 2.50              | Pass    |
|         | 5900            | 26000     | /                            | -33.60               | 0.437              | 2.50              | Pass    |
| Middle  | 30              | 5300      | /                            | -36.86               | 0.206              | 2.50              | Pass    |
|         | 5300            | 5460      | 5450.16                      | -31.14               | 0.769              | 2.50              | Pass    |
|         | 5460            | 5470      | 5463.80                      | -30.85               | 0.822              | 12.50             | Pass    |
|         | 5745            | 5765      | 5755.23                      | -29.77               | 1.054              | 12.50             | Pass    |
|         | 5765            | 5900      | 5824.20                      | -29.91               | 1.021              | 2.50              | Pass    |
|         | 5900            | 26000     | /                            | -34.03               | 0.395              | 2.50              | Pass    |
| High    | 30              | 5300      | /                            | -36.63               | 0.217              | 2.50              | Pass    |
|         | 5300            | 5460      | 5450.80                      | -32.04               | 0.625              | 2.50              | Pass    |
|         | 5460            | 5470      | 5467.59                      | -31.27               | 0.746              | 12.50             | Pass    |
|         | 5745            | 5765      | 5745.27                      | -20.81               | 8.299              | 12.50             | Pass    |
|         | 5765            | 5900      | 5824.33                      | -30.05               | 0.989              | 2.50              | Pass    |
|         | 5900            | 26000     | /                            | -33.96               | 0.402              | 2.50              | Pass    |

Note:

For 30-5300MHz, 5900-26000MHz:

Result (dBm/MHz) =  $10 \cdot \log \{ 10^{\text{Result (dBm/MHz)}_{\text{Chain0}}/10} + 10^{\text{Result (dBm/MHz)}_{\text{Chain1}}/10} \}$ Result (μW/MHz) =  $\{ 10^{\text{Result (dBm/MHz)}/10} \} \cdot 1000$

**5.6G, Chain 0+Chain 1, 802.11ac40**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                    | Limit<br>(μW/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------|-------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>(μW/MHz) |                   |         |
| Low     | 30              | 5300      | /                            | -36.29               | 0.235              | 12.50             | Pass    |
|         | 5300            | 5460      | 5453.84                      | -26.58               | 2.198              | 12.50             | Pass    |
|         | 5460            | 5470      | 5468.96                      | -23.26               | 4.721              | 50                | Pass    |
|         | 5770            | 5900      | 5855.22                      | -30.20               | 0.955              | 12.50             | Pass    |
|         | 5900            | 26000     | /                            | -33.85               | 0.412              | 12.50             | Pass    |
| Middle  | 30              | 5300      | /                            | -36.19               | 0.240              | 12.50             | Pass    |
|         | 5300            | 5460      | 5456.88                      | -30.95               | 0.804              | 12.50             | Pass    |
|         | 5460            | 5470      | 5460.06                      | -30.89               | 0.815              | 50                | Pass    |
|         | 5770            | 5900      | 5785.80                      | -30.00               | 1                  | 12.50             | Pass    |
|         | 5900            | 26000     | /                            | -33.80               | 0.417              | 12.50             | Pass    |
| High    | 30              | 5300      | /                            | -36.47               | 0.225              | 12.50             | Pass    |
|         | 5300            | 5460      | 5449.04                      | -33.06               | 0.494              | 12.50             | Pass    |
|         | 5460            | 5470      | 5468.21                      | -30.99               | 0.796              | 50                | Pass    |
|         | 5770            | 5900      | 5796.45                      | -29.98               | 1.005              | 12.50             | Pass    |
|         | 5900            | 26000     | /                            | -33.63               | 0.434              | 12.50             | Pass    |

Note:

For 30-5300MHz, 5900-26000MHz:

Result (dBm/MHz) =  $10 \cdot \log \{ 10^{\lceil \text{Result (dBm/MHz)}_{\text{Chain0}} / 10 \rceil} + 10^{\lceil \text{Result (dBm/MHz)}_{\text{Chain1}} / 10 \rceil} \}$ Result (μW/MHz) =  $\{ 10^{\lceil \text{Result (dBm/MHz)} / 10 \rceil} \} \cdot 1000$

**5.6G, Chain 0+Chain 1, 802.11ac80**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                    | Limit<br>(μW/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------|-------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>(μW/MHz) |                   |         |
| Low     | 30              | 5300      | /                            | -36.42               | 0.228              | 12.50             | Pass    |
|         | 5300            | 5460      | 5451.92                      | -23.78               | 4.188              | 12.50             | Pass    |
|         | 5460            | 5469.5    | 5467.90                      | -20.56               | 8.790              | 50                | Pass    |
|         | 5469.5          | 5470      | 5469.54                      | -21.66               | 6.823              | 51.20             | Pass    |
|         | 5770            | 5900      | 5796.58                      | -29.52               | 1.117              | 12.50             | Pass    |
|         | 5900            | 26000     | /                            | -33.72               | 0.425              | 12.50             | Pass    |
| Middle  | 30              | 5300      | /                            | -36.92               | 0.203              | 12.50             | Pass    |
|         | 5300            | 5460      | 5459.92                      | -31.45               | 0.716              | 12.50             | Pass    |
|         | 5460            | 5469.5    | 5461.21                      | -28.96               | 1.271              | 50                | Pass    |
|         | 5469.5          | 5470      | 5469.85                      | -27.45               | 1.799              | 51.20             | Pass    |
|         | 5770            | 5900      | 5827.27                      | -30.21               | 0.953              | 12.50             | Pass    |
|         | 5900            | 26000     | /                            | -33.33               | 0.465              | 12.50             | Pass    |
| High    | 30              | 5300      | /                            | -37.01               | 0.199              | 12.50             | Pass    |
|         | 5300            | 5460      | 5426.64                      | -31.65               | 0.684              | 12.50             | Pass    |
|         | 5460            | 5469.5    | 5465.47                      | -31.59               | 0.693              | 50                | Pass    |
|         | 5469.5          | 5470      | 5469.71                      | -30.70               | 0.851              | 51.20             | Pass    |
|         | 5770            | 5900      | 5772.15                      | -27.09               | 1.954              | 12.50             | Pass    |
|         | 5900            | 26000     | /                            | -33.45               | 0.452              | 12.50             | Pass    |

Note:

For 30-5300MHz, 5900-26000MHz:

Result (dBm/MHz) =  $10 \cdot \log \{ 10^{\text{Result (dBm/MHz)}_{\text{Chain0}}/10} + 10^{\text{Result (dBm/MHz)}_{\text{Chain1}}/10} \}$ Result (μW/MHz) =  $\{ 10^{\text{Result (dBm/MHz)}/10} \} \cdot 1000$

**5.6G, Chain 0+Chain 1, 802.11ax20**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                    | Limit<br>(μW/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------|-------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>(μW/MHz) |                   |         |
| Low     | 30              | 5300      | /                            | -36.61               | 0.218              | 2.50              | Pass    |
|         | 5300            | 5460      | 5432.40                      | -30.44               | 0.904              | 2.50              | Pass    |
|         | 5460            | 5470      | 5468.75                      | -23.67               | 4.295              | 12.50             | Pass    |
|         | 5745            | 5765      | 5745.74                      | -30.92               | 0.809              | 12.50             | Pass    |
|         | 5765            | 5900      | 5849.17                      | -30.40               | 0.912              | 2.50              | Pass    |
|         | 5900            | 26000     | /                            | -33.50               | 0.447              | 2.50              | Pass    |
| Middle  | 30              | 5300      | /                            | -36.43               | 0.228              | 2.50              | Pass    |
|         | 5300            | 5460      | 5418.00                      | -30.46               | 0.899              | 2.50              | Pass    |
|         | 5460            | 5470      | 5461.60                      | -31.34               | 0.735              | 12.50             | Pass    |
|         | 5745            | 5765      | 5752.50                      | -30.00               | 1                  | 12.50             | Pass    |
|         | 5765            | 5900      | 5837.70                      | -30.52               | 0.887              | 2.50              | Pass    |
|         | 5900            | 26000     | /                            | -33.76               | 0.421              | 2.50              | Pass    |
| High    | 30              | 5300      | /                            | -36.83               | 0.207              | 2.50              | Pass    |
|         | 5300            | 5460      | 5430.80                      | -32.97               | 0.505              | 2.50              | Pass    |
|         | 5460            | 5470      | 5466.59                      | -32.16               | 0.608              | 12.50             | Pass    |
|         | 5745            | 5765      | 5745.35                      | -27.58               | 1.746              | 12.50             | Pass    |
|         | 5765            | 5900      | 5868.61                      | -29.29               | 1.178              | 2.50              | Pass    |
|         | 5900            | 26000     | /                            | -33.43               | 0.454              | 2.50              | Pass    |

Note:

For 30-5300MHz, 5900-26000MHz:

Result (dBm/MHz) =  $10 \cdot \log \{ 10^{\text{Result (dBm/MHz)}_{\text{Chain0}}/10} + 10^{\text{Result (dBm/MHz)}_{\text{Chain1}}/10} \}$ Result (μW/MHz) =  $\{ 10^{\text{Result (dBm/MHz)}/10} \} \cdot 1000$

**5.6G, Chain 0+Chain 1, 802.11ax40**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                    | Limit<br>(μW/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------|-------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>(μW/MHz) |                   |         |
| Low     | 30              | 5300      | /                            | -36.46               | 0.226              | 12.50             | Pass    |
|         | 5300            | 5460      | 5450.64                      | -25.08               | 3.105              | 12.50             | Pass    |
|         | 5460            | 5470      | 5468.60                      | -21.21               | 7.568              | 50                | Pass    |
|         | 5770            | 5900      | 5858.72                      | -30.11               | 0.975              | 12.50             | Pass    |
|         | 5900            | 26000     | /                            | -33.72               | 0.425              | 12.50             | Pass    |
| Middle  | 30              | 5300      | /                            | -36.38               | 0.230              | 12.50             | Pass    |
|         | 5300            | 5460      | 5442.80                      | -32.20               | 0.603              | 12.50             | Pass    |
|         | 5460            | 5470      | 5469.36                      | -31.31               | 0.740              | 50                | Pass    |
|         | 5770            | 5900      | 5862.11                      | -30.57               | 0.877              | 12.50             | Pass    |
|         | 5900            | 26000     | /                            | -33.86               | 0.411              | 12.50             | Pass    |
| High    | 30              | 5300      | /                            | -36.67               | 0.215              | 12.50             | Pass    |
|         | 5300            | 5460      | 5428.08                      | -31.95               | 0.638              | 12.50             | Pass    |
|         | 5460            | 5470      | 5464.91                      | -31.13               | 0.771              | 50                | Pass    |
|         | 5770            | 5900      | 5770.19                      | -27.75               | 1.679              | 12.50             | Pass    |
|         | 5900            | 26000     | /                            | -33.51               | 0.446              | 12.50             | Pass    |

Note:

For 30-5300MHz, 5900-26000MHz:

Result (dBm/MHz) =  $10 \cdot \log \{ 10^{\lceil \text{Result (dBm/MHz)}_{\text{Chain0}} / 10 \rceil} + 10^{\lceil \text{Result (dBm/MHz)}_{\text{Chain1}} / 10 \rceil} \}$ Result (μW/MHz) =  $\{ 10^{\lceil \text{Result (dBm/MHz)} / 10 \rceil} \} \cdot 1000$

**5.6G, Chain 0+Chain 1, 802.11ax80**

| Channel | Frequency Range |           | Max.Emission<br>Located(MHz) | Max.Emission         |                    | Limit<br>(μW/MHz) | Verdict |
|---------|-----------------|-----------|------------------------------|----------------------|--------------------|-------------------|---------|
|         | Start(MHz)      | Stop(MHz) |                              | Reading<br>(dBm/MHz) | Result<br>(μW/MHz) |                   |         |
| Low     | 30              | 5300      | /                            | -33.86               | 0.411              | 12.50             | Pass    |
|         | 5300            | 5460      | 5456.24                      | -22.58               | 5.521              | 12.50             | Pass    |
|         | 5460            | 5469.5    | 5465.78                      | -20.49               | 8.933              | 50                | Pass    |
|         | 5469.5          | 5470      | 5469.99                      | -20.00               | 10                 | 51.20             | Pass    |
|         | 5770            | 5900      | 5869.00                      | -30.80               | 0.832              | 12.50             | Pass    |
|         | 5900            | 26000     | /                            | -33.73               | 0.424              | 12.50             | Pass    |
| Middle  | 30              | 5300      | /                            | -34.03               | 0.395              | 12.50             | Pass    |
|         | 5300            | 5460      | 5428.08                      | -31.39               | 0.726              | 12.50             | Pass    |
|         | 5460            | 5469.5    | 5465.31                      | -28.88               | 1.294              | 50                | Pass    |
|         | 5469.5          | 5470      | 5469.73                      | -25.52               | 2.805              | 51.20             | Pass    |
|         | 5770            | 5900      | 5833.12                      | -29.96               | 1.009              | 12.50             | Pass    |
|         | 5900            | 26000     | /                            | -33.86               | 0.411              | 12.50             | Pass    |
| High    | 30              | 5300      | /                            | -34.67               | 0.341              | 12.50             | Pass    |
|         | 5300            | 5460      | 5443.44                      | -31.63               | 0.687              | 12.50             | Pass    |
|         | 5460            | 5469.5    | 5462.46                      | -31.51               | 0.706              | 50                | Pass    |
|         | 5469.5          | 5470      | 5469.60                      | -30.46               | 0.899              | 51.20             | Pass    |
|         | 5770            | 5900      | 5781.11                      | -23.62               | 4.345              | 12.50             | Pass    |
|         | 5900            | 26000     | /                            | -33.64               | 0.433              | 12.50             | Pass    |


Note:

For 30-5300MHz, 5900-26000MHz:

Result (dBm/MHz) =  $10 \cdot \log \{ 10^{\text{Result (dBm/MHz)}_{\text{Chain0}}/10} + 10^{\text{Result (dBm/MHz)}_{\text{Chain1}}/10} \}$ Result (μW/MHz) =  $\{ 10^{\text{Result (dBm/MHz)}/10} \} \cdot 1000$


## W52, Chain 0, Test Condition: NV

## 802.11a, Low Channel(30MHz~5.1GHz)

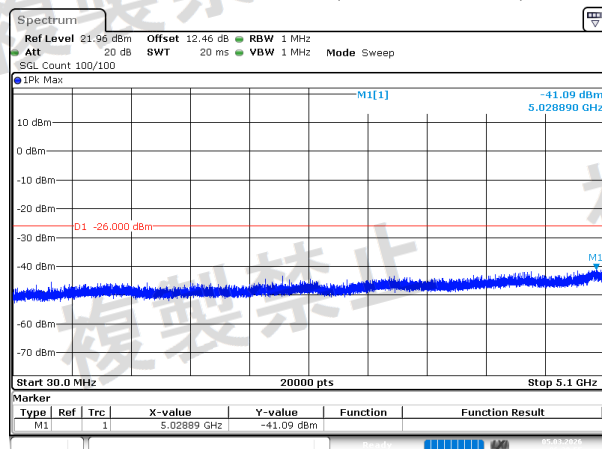


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:38:55

## 802.11a, Low Channel(5.3GHz~26GHz)

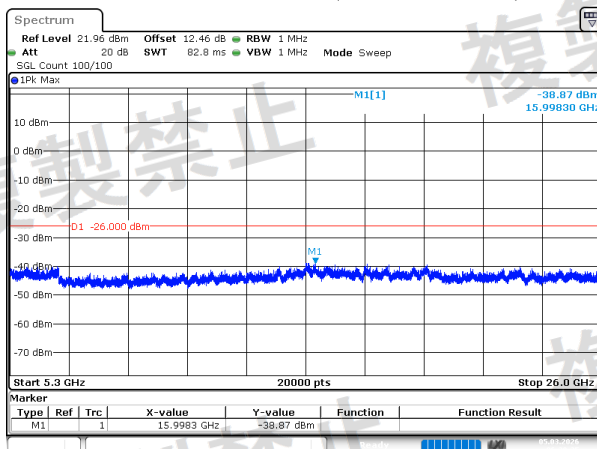


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:39:35

## 802.11a, Low Channel(5.1GHz~5.3GHz)

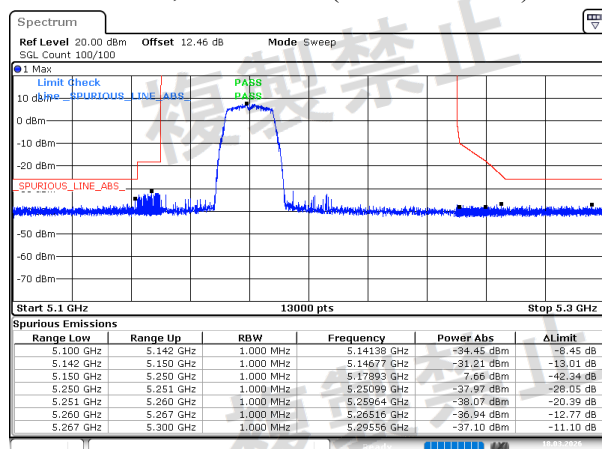


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 03:56:38

## 802.11a, Middle Channel(30MHz~5.1GHz)

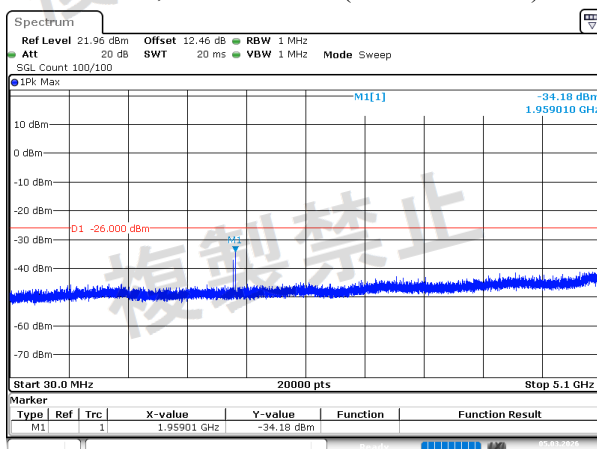


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:40:51

## 802.11a, Middle Channel(5.3GHz~26GHz)

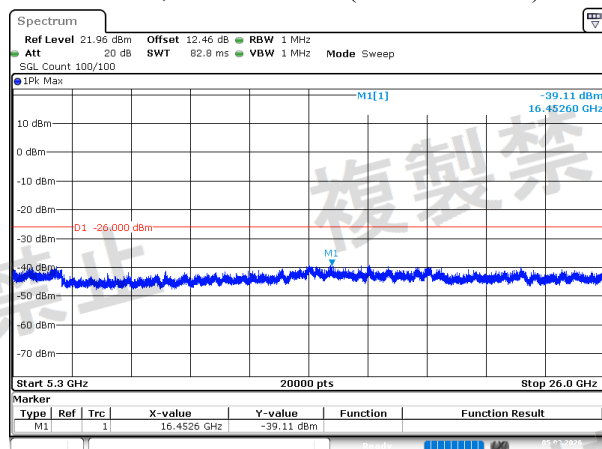


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:41:33

## 802.11a, Middle Channel(5.1GHz~5.3GHz)

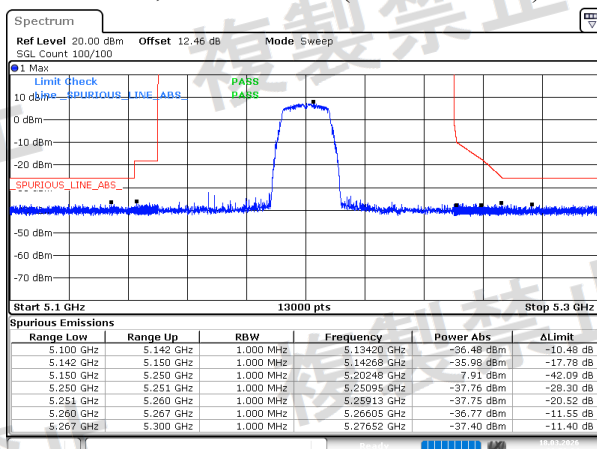


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 03:58:34


## 802.11a, High Channel(30MHz~5.1GHz)

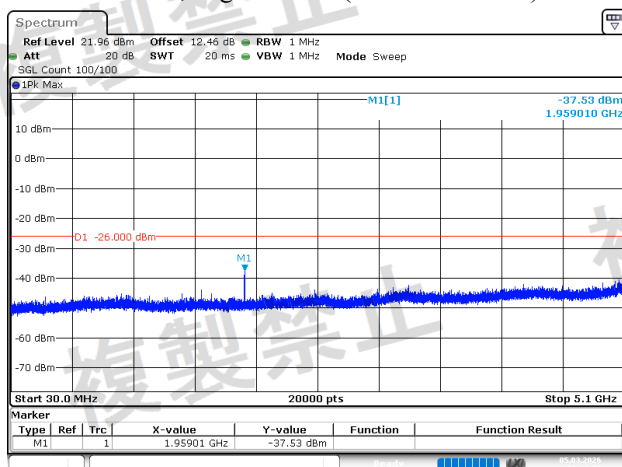


## 802.11a, High Channel(5.3GHz~26GHz)

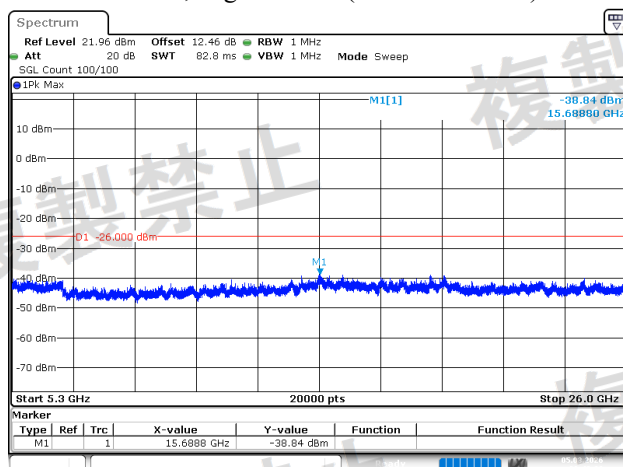


## 802.11a, High Channel(5.1GHz~5.3GHz)

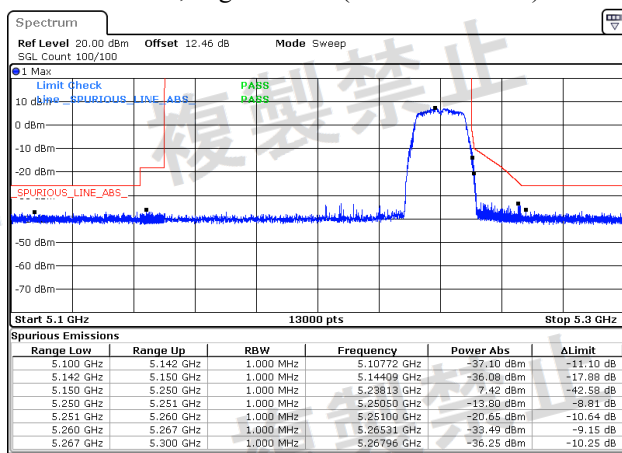


## 802.11ac20, Low Channel(30MHz~5.1GHz)

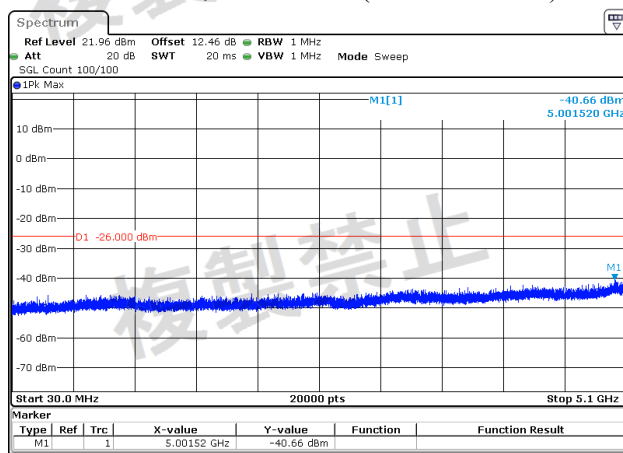


## 802.11ac20, Low Channel(5.3GHz~26GHz)

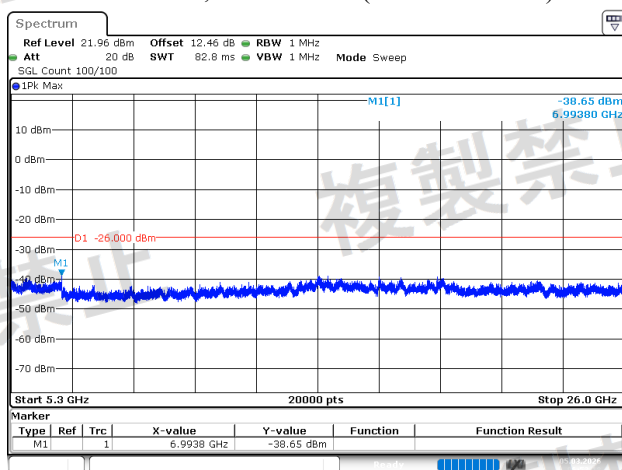

## 802.11ac20, Low Channel(5.1GHz~5.3GHz)

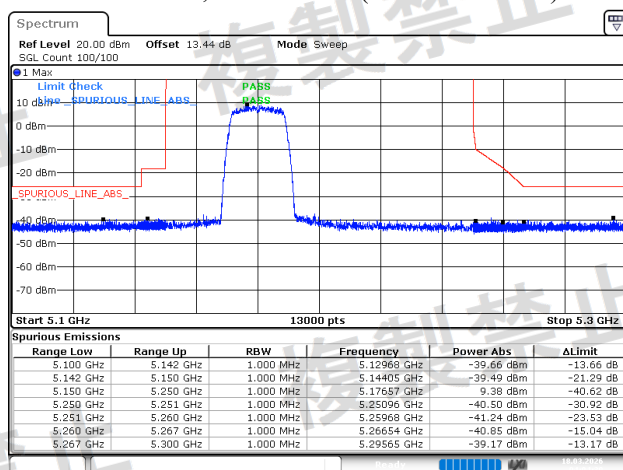


## 802.11ac20, Middle Channel(30MHz~5.1GHz)

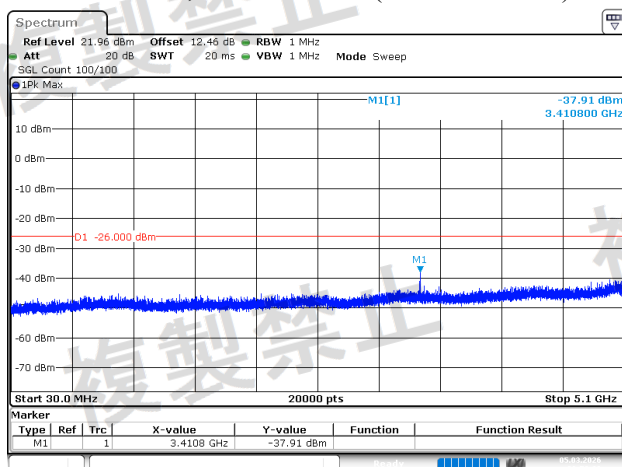


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:53:36

## 802.11ac20, Middle Channel(5.3GHz~26GHz)

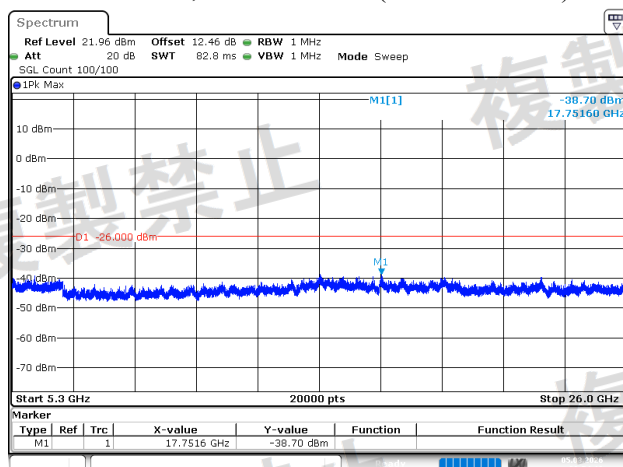


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:54:16

## 802.11ac20, Middle Channel(5.1GHz~5.3GHz)

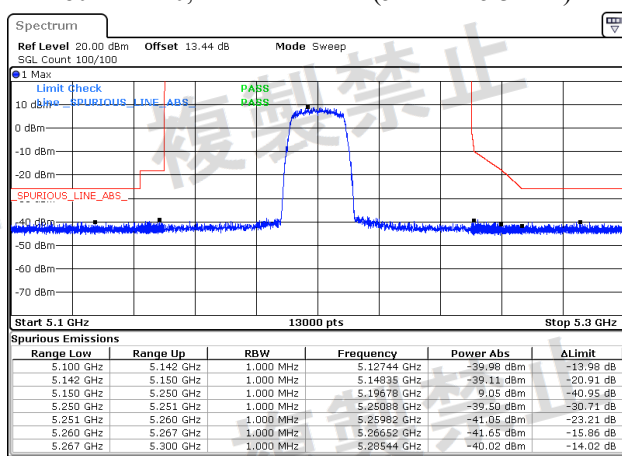


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 04:05:10

## 802.11ac20, High Channel(30MHz~5.1GHz)

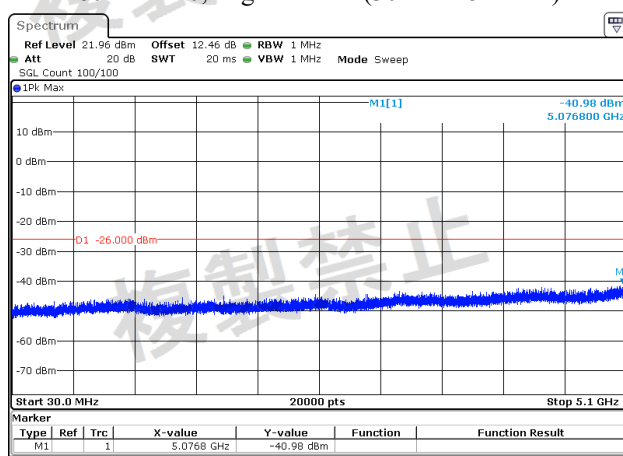


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:55:38

## 802.11ac20, High Channel(5.3GHz~26GHz)

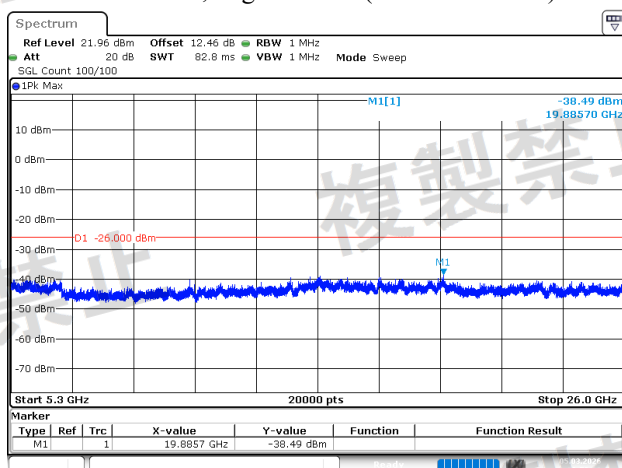


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:56:19

## 802.11ac20, High Channel(5.1GHz~5.3GHz)

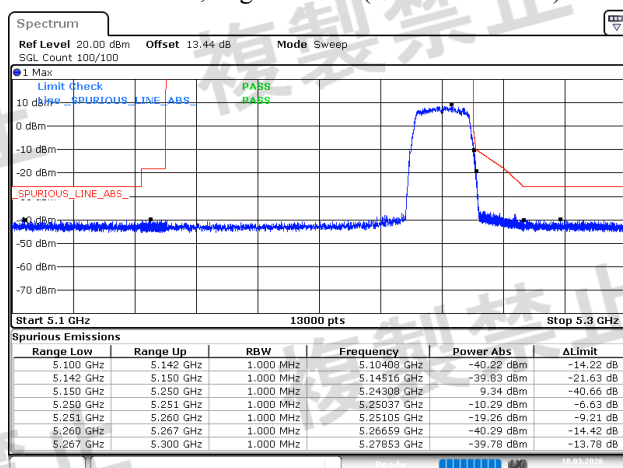

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 04:05:45


## 802.11ac40, Low Channel(30MHz~5.1GHz)

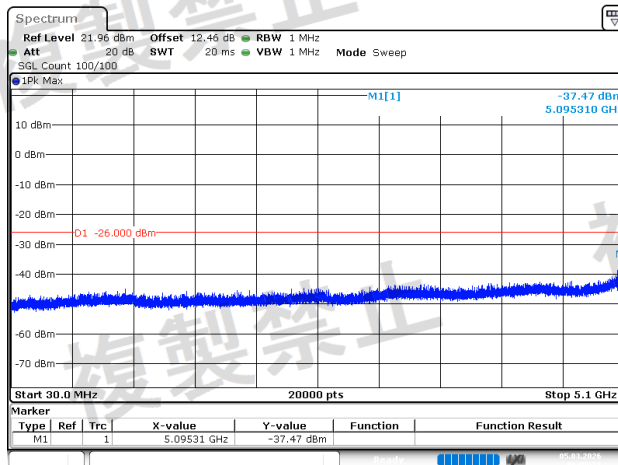

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang

Date: 5.MAR.2026 06:10:21


## 802.11ac40, Low Channel(5.3GHz~26GHz)

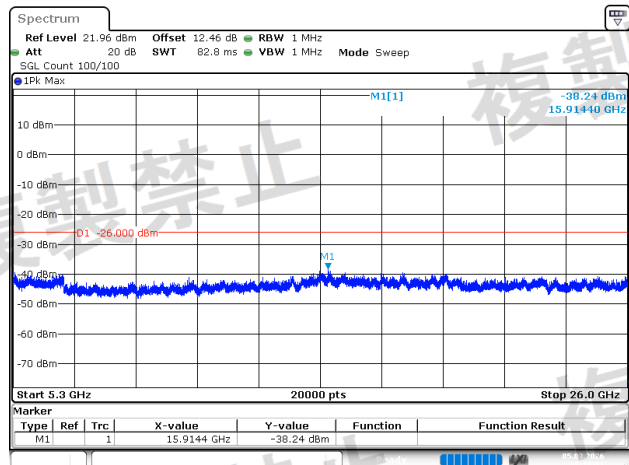

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang

Date: 5.MAR.2026 06:10:01


## 802.11ac40, Low Channel(5.1GHz~5.3GHz)

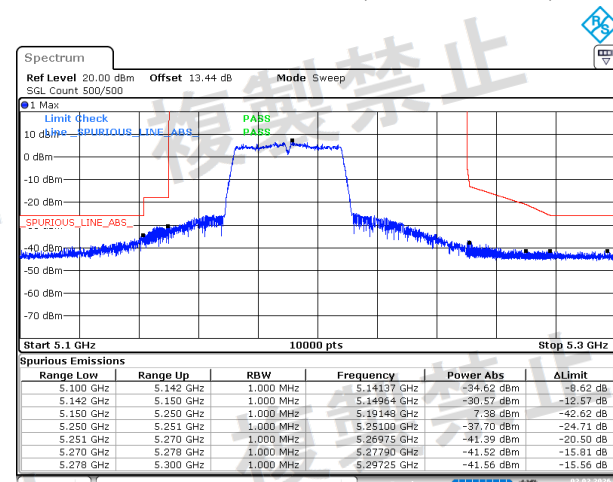

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang

Date: 2.FEB.2026 23:57:35


## 802.11ac40, High Channel(30MHz~5.1GHz)

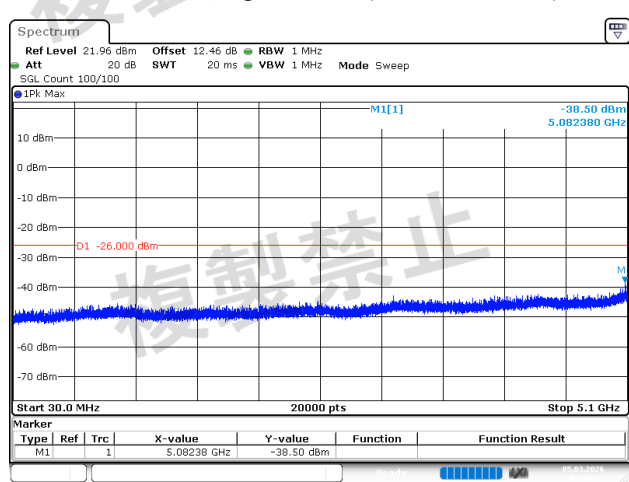

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang

Date: 5.MAR.2026 06:11:23


## 802.11ac40, High Channel(5.3GHz~26GHz)

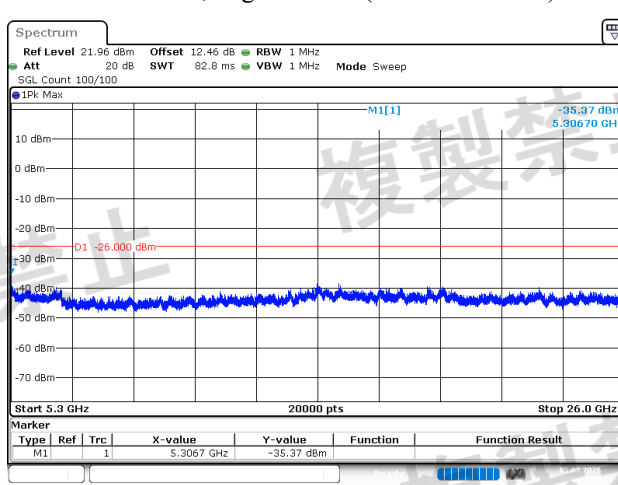

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang

Date: 5.MAR.2026 06:12:03


## 802.11ac40, High Channel(5.1GHz~5.3GHz)

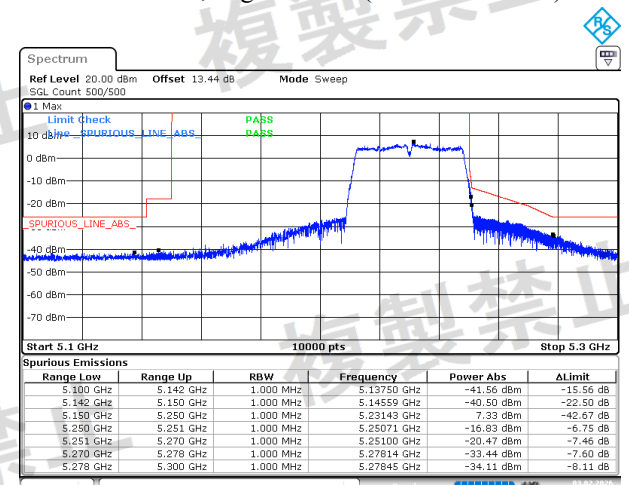

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang


Date: 3.FEB.2026 00:22:00

## 802.11ac80, Middle Channel(30MHz~5.1GHz)

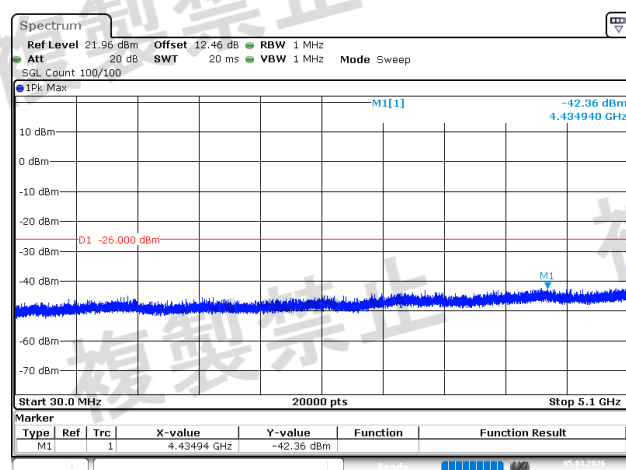


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 05:42:50

## 802.11ac80, Middle Channel(5.1GHz~5.35GHz)

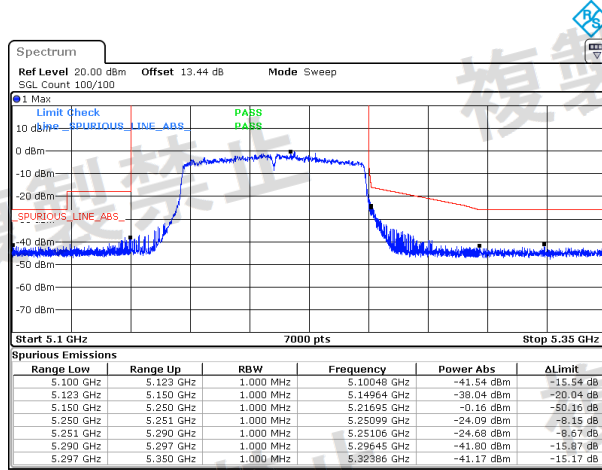


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 06:40:23

## 802.11ac80, Middle Channel(5.35GHz~26GHz)

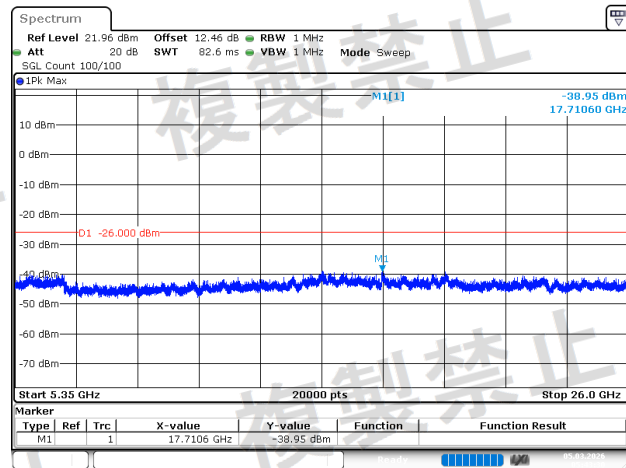


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 05:43:30

## 802.11ax20, Low Channel(30MHz~5.1GHz)

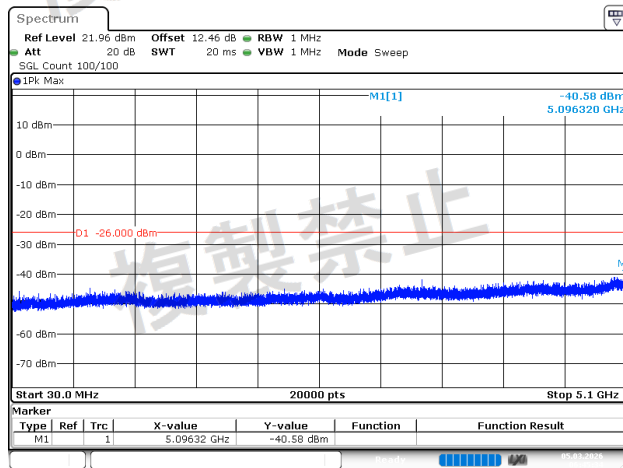


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:45:35

## 802.11ax20, Low Channel(5.3GHz~26GHz)

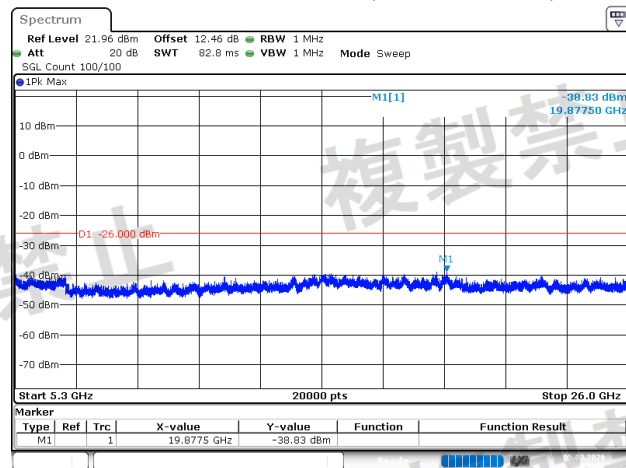


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:46:15

## 802.11ax20, Low Channel(5.1GHz~5.3GHz)

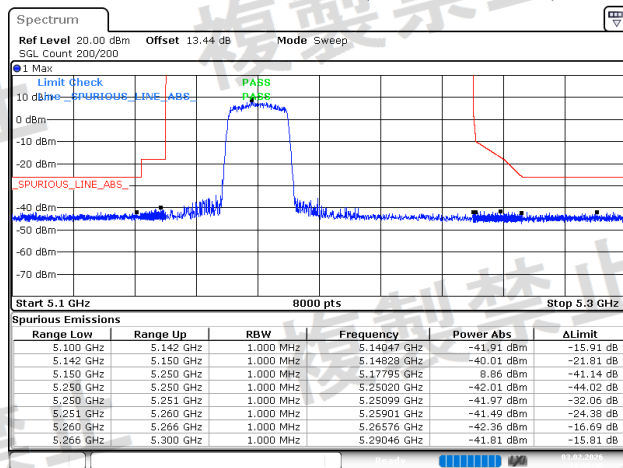


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 18:00:30

## 802.11ax20, Middle Channel(30MHz~5.1GHz)

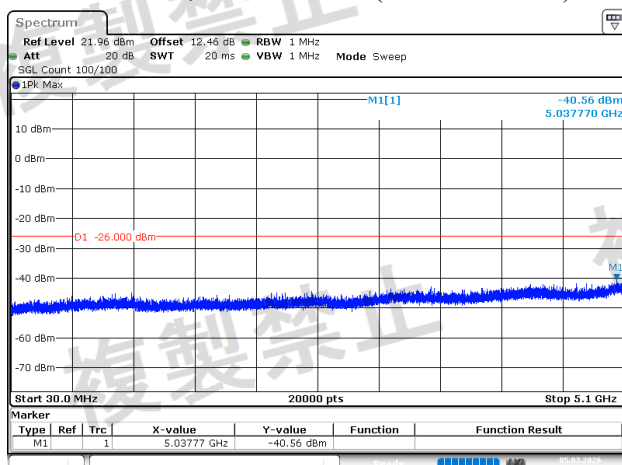


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:47:29

## 802.11ax20, Middle Channel(5.3GHz~26GHz)

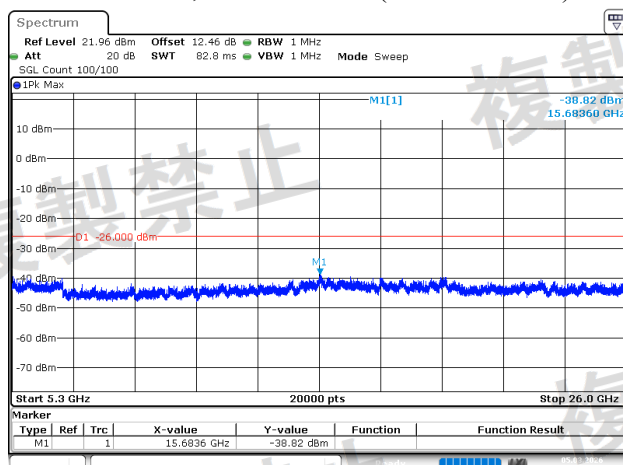


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:48:10

## 802.11ax20, Middle Channel(5.1GHz~5.3GHz)

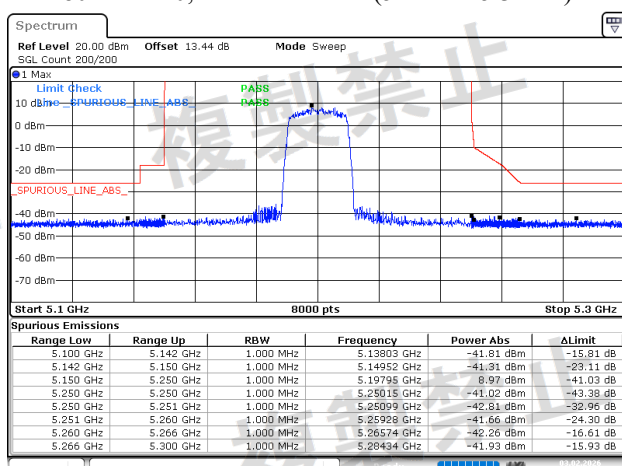


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 18:03:58

## 802.11ax20, High Channel(30MHz~5.1GHz)

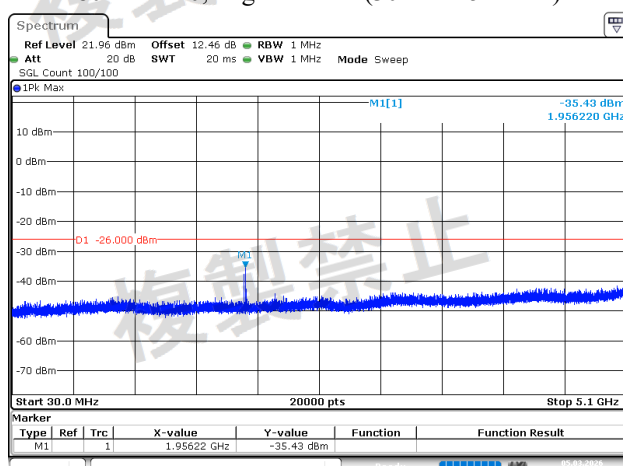


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:49:34

## 802.11ax20, High Channel(5.3GHz~26GHz)

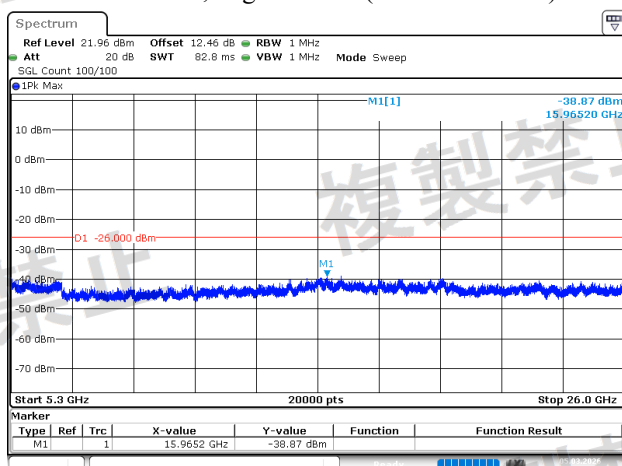


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:50:16

## 802.11ax20, High Channel(5.1GHz~5.3GHz)

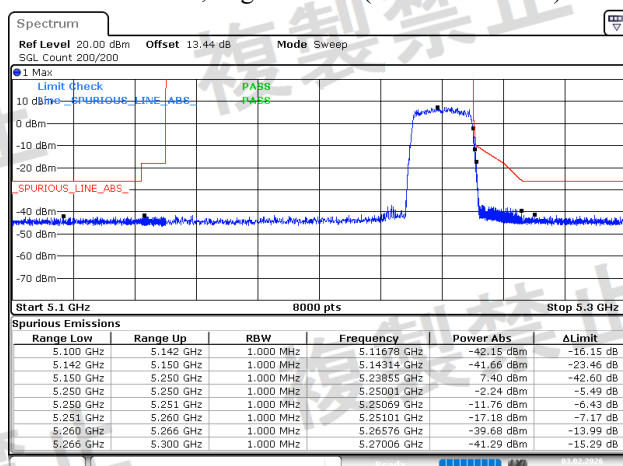


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 18:06:11

## 802.11ax40, Low Channel(30MHz~5.1GHz)

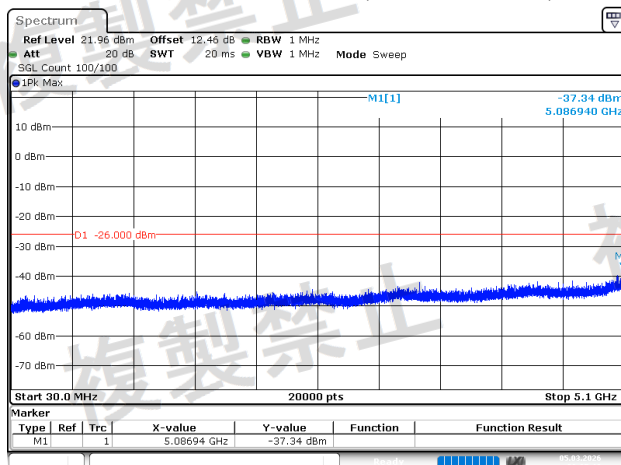


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:05:11

## 802.11ax40, Low Channel(5.3GHz~26GHz)

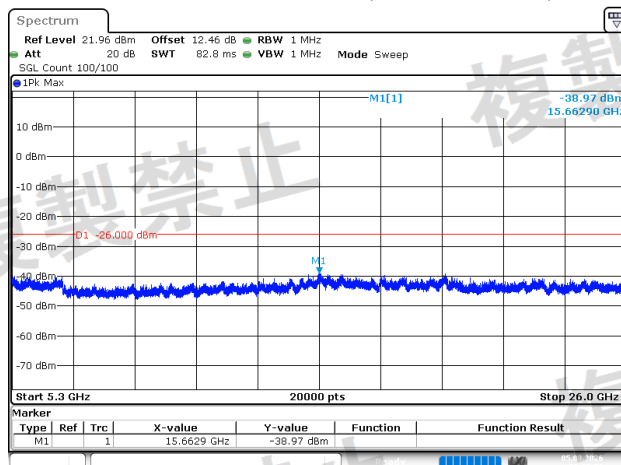


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:05:52

## 802.11ax40, Low Channel(5.1GHz~5.3GHz)

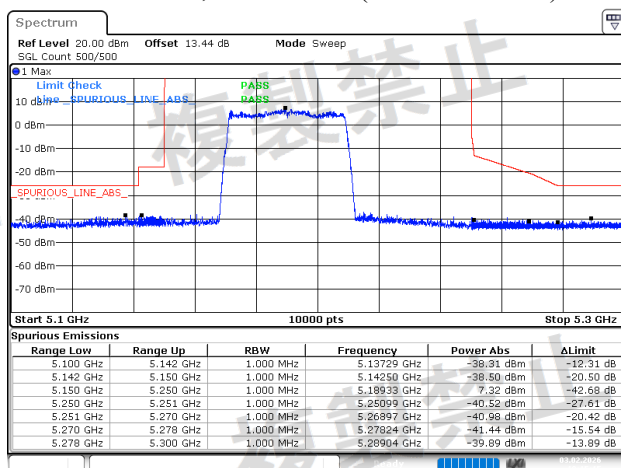


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 19:15:16

## 802.11ax40, High Channel(30MHz~5.1GHz)

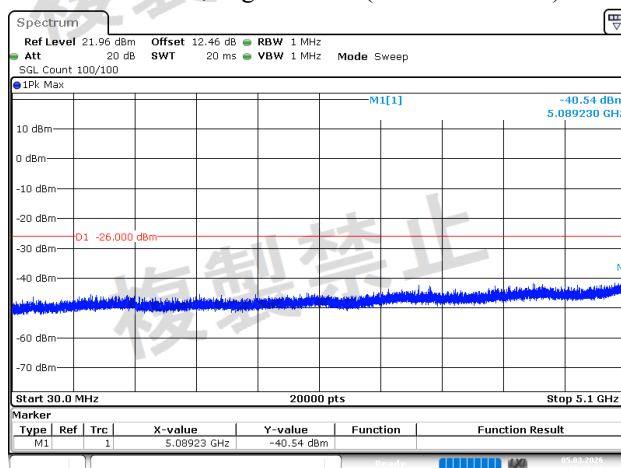


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:07:26

## 802.11ax40, High Channel(5.3GHz~26GHz)

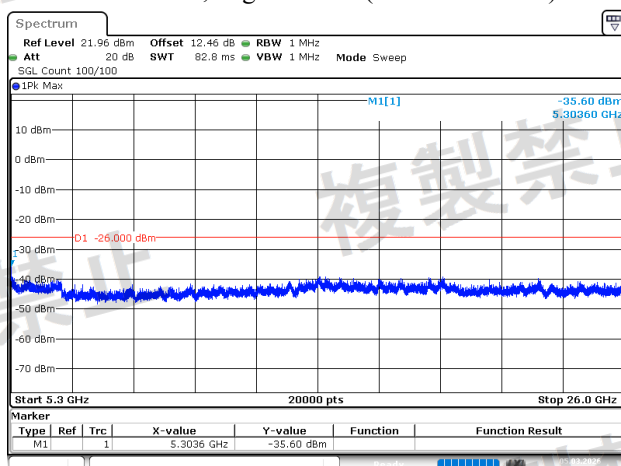


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:08:06

## 802.11ax40, High Channel(5.1GHz~5.3GHz)

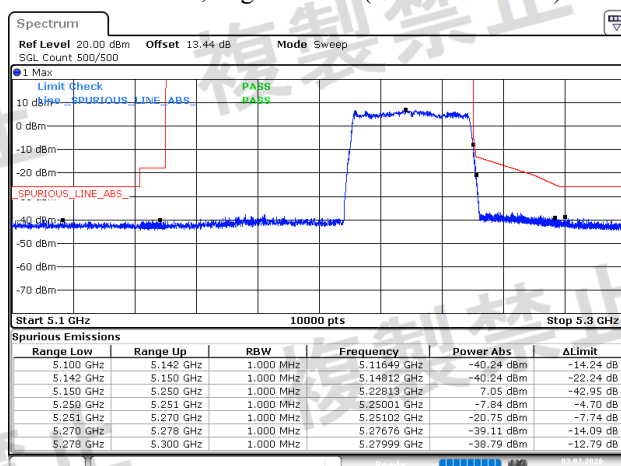


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 19:17:53

## 802.11ax80, Middle Channel(30MHz~5.1GHz)

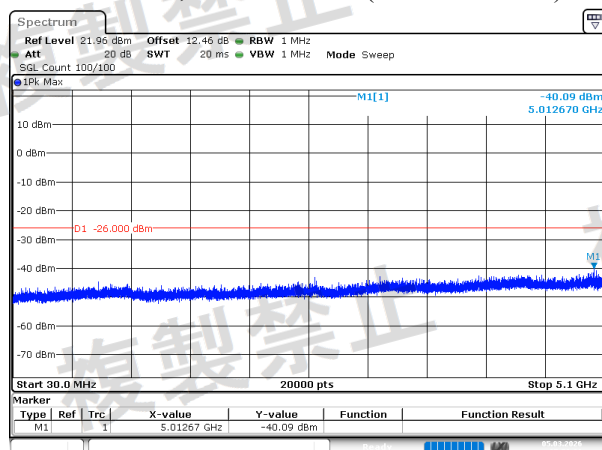

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 05:53:09


## 802.11ax80, Middle Channel(5.1GHz~5.3GHz)

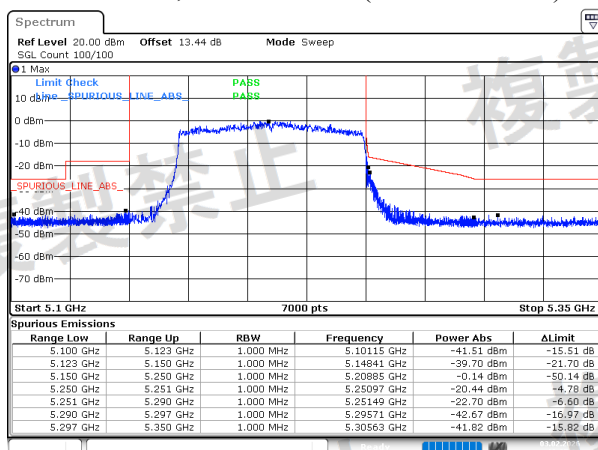

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 19:37:32


## W52, Chain 1, Test Condition: NV

## 802.11ax80, Middle Channel(5.35GHz~26GHz)

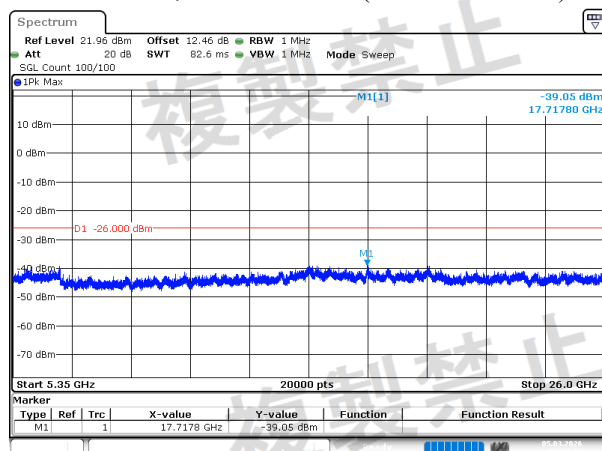


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 05:53:50

## 802.11a, Low Channel(30MHz~5.1GHz)

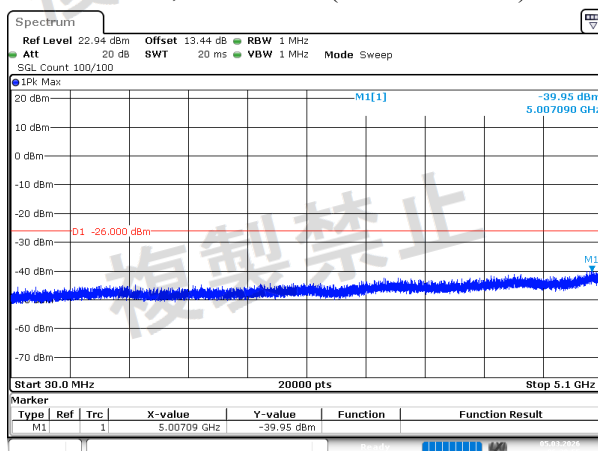


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:39:55

## 802.11a, Low Channel(5.3GHz~26GHz)

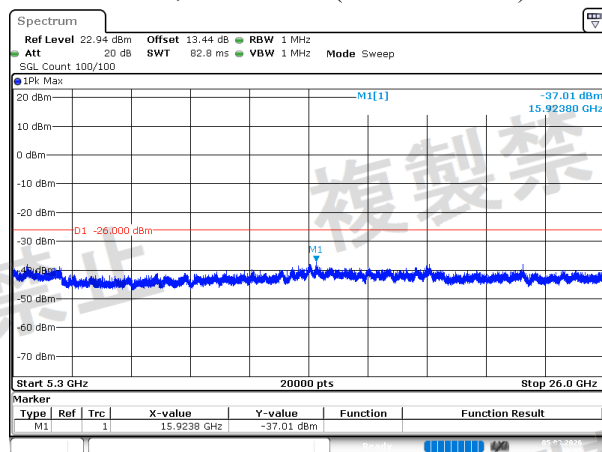


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:40:35

## 802.11a, Low Channel(5.1GHz~5.3GHz)

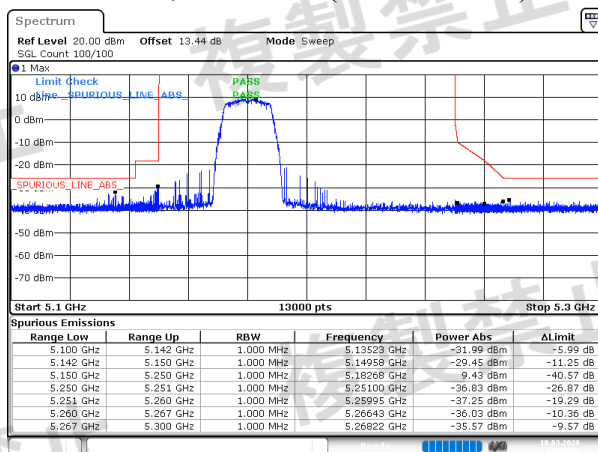


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 10.MAR.2026 03:46:16


## 802.11a, Middle Channel(30MHz~5.1GHz)

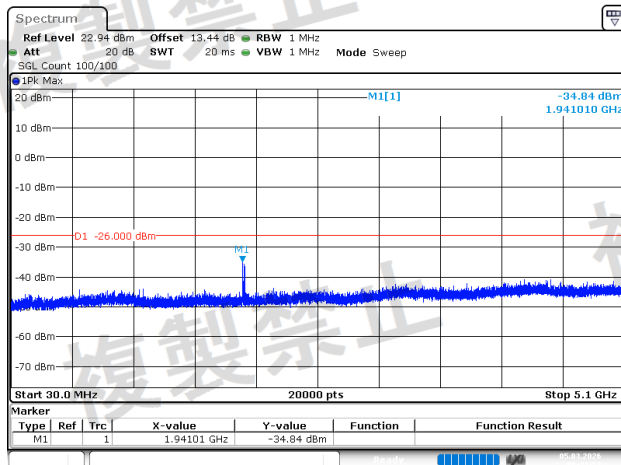


## 802.11a, Middle Channel(5.3GHz~26GHz)

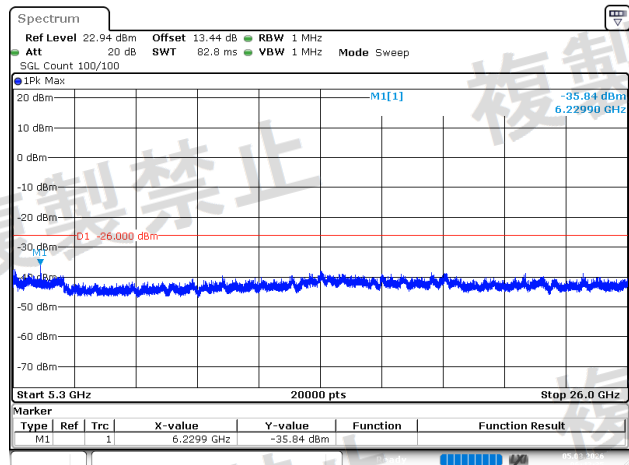


## 802.11a, Middle Channel(5.1GHz~5.3GHz)

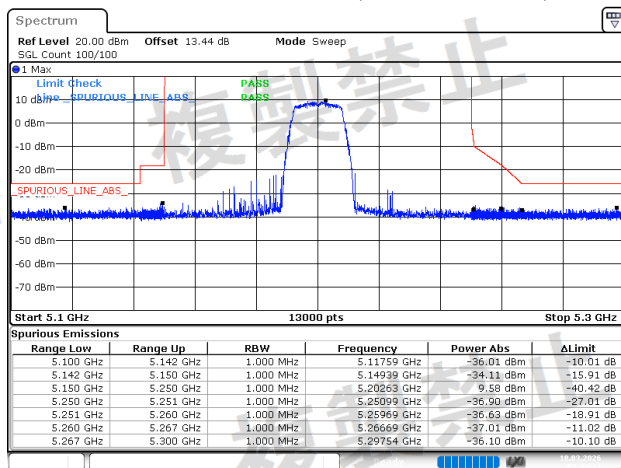


## 802.11a, High Channel(30MHz~5.1GHz)

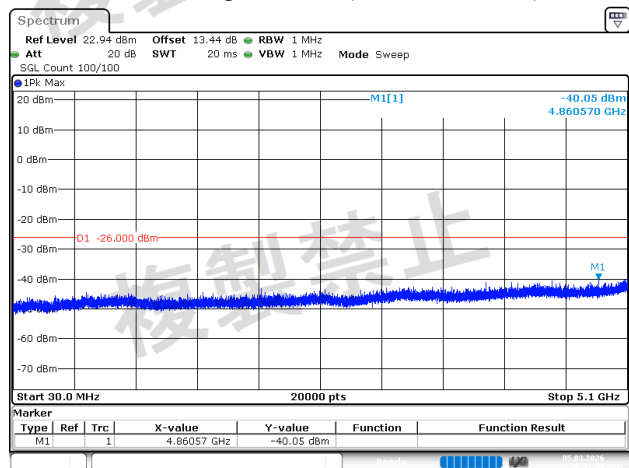


## 802.11a, High Channel(5.3GHz~26GHz)

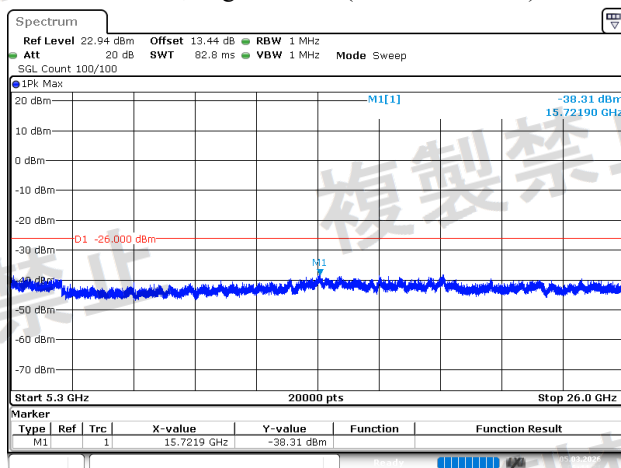


## 802.11a, High Channel(5.1GHz~5.3GHz)

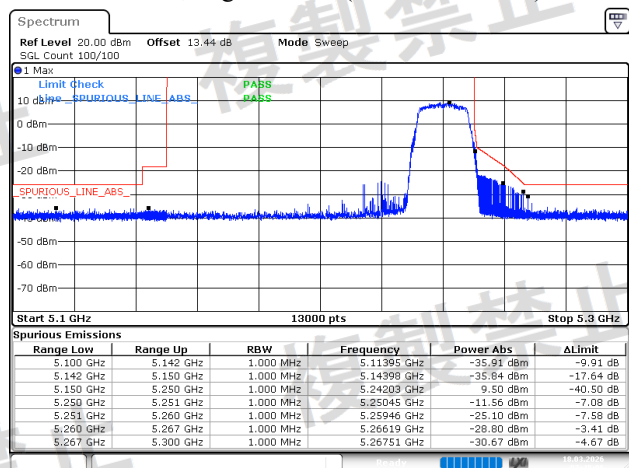


## 802.11ac20, Low Channel(30MHz~5.1GHz)

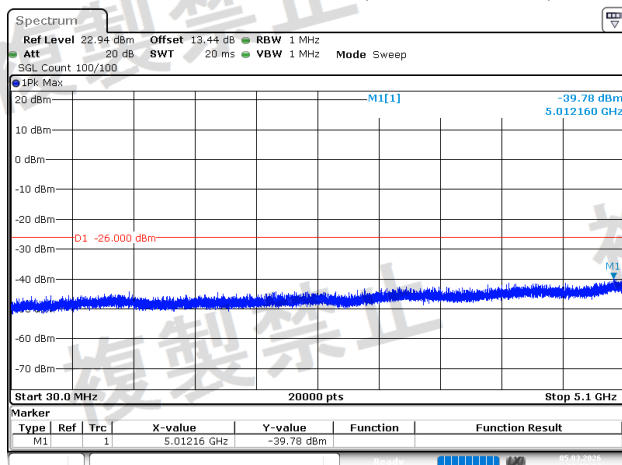


## 802.11ac20, Low Channel(5.3GHz~26GHz)

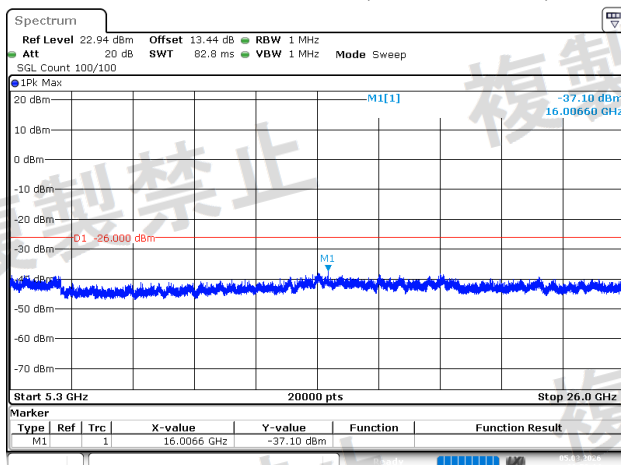


## 802.11ac20, Low Channel(5.1GHz~5.3GHz)

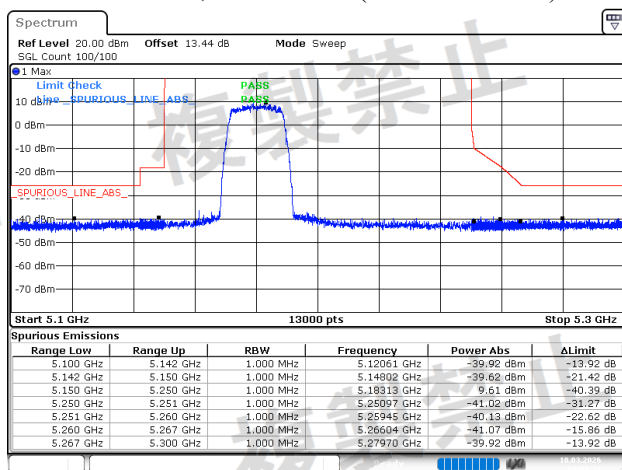


## 802.11ac20, Middle Channel(30MHz~5.1GHz)

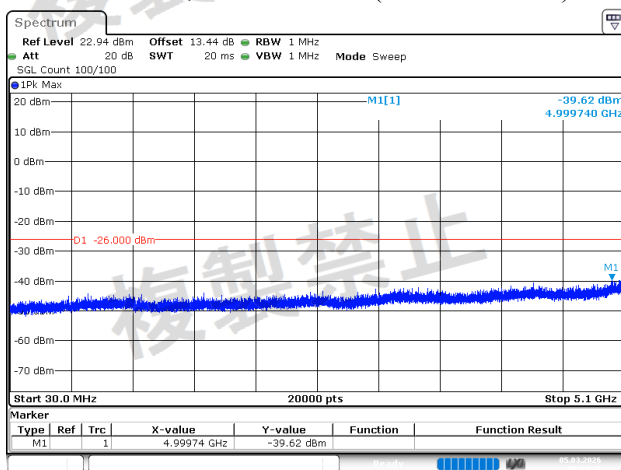


## 802.11ac20, Middle Channel(5.3GHz~26GHz)

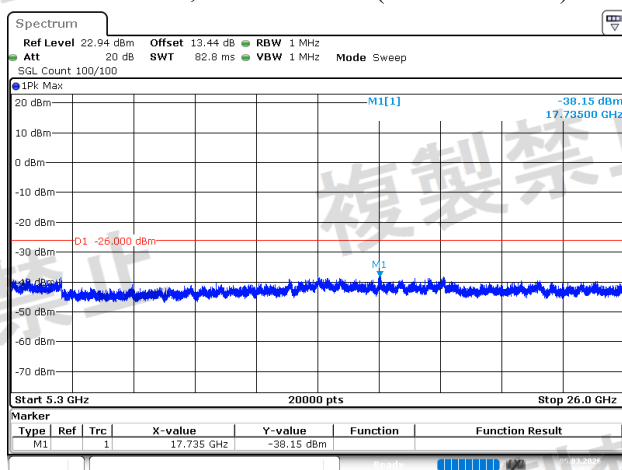

## 802.11ac20, Middle Channel(5.1GHz~5.3GHz)

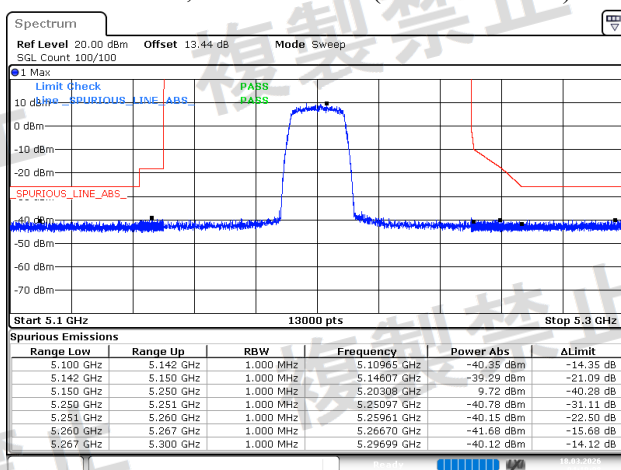


## 802.11ac20, High Channel(30MHz~5.1GHz)

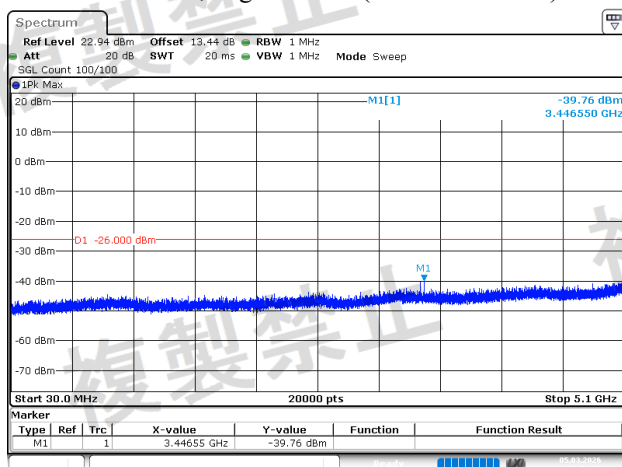


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:16:36

## 802.11ac20, High Channel(5.3GHz~26GHz)

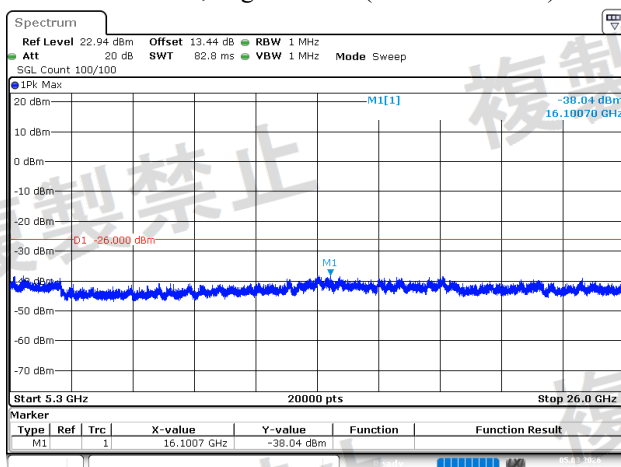


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:17:17

## 802.11ac20, High Channel(5.1GHz~5.3GHz)

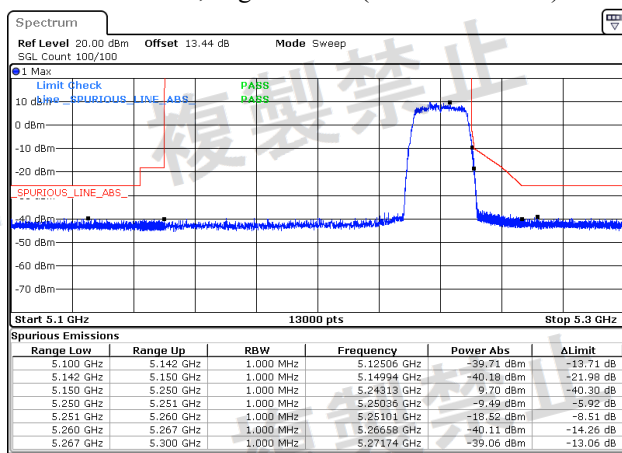


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 19.MAR.2026 04:10:49

## 802.11ac40, Low Channel(30MHz~5.1GHz)

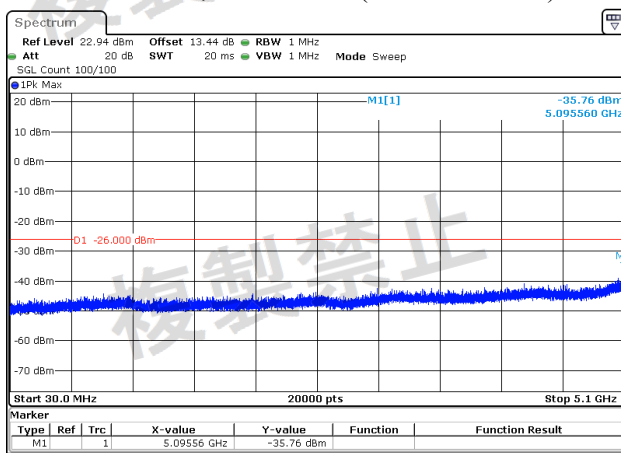


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:10:18

## 802.11ac40, Low Channel(5.3GHz~26GHz)

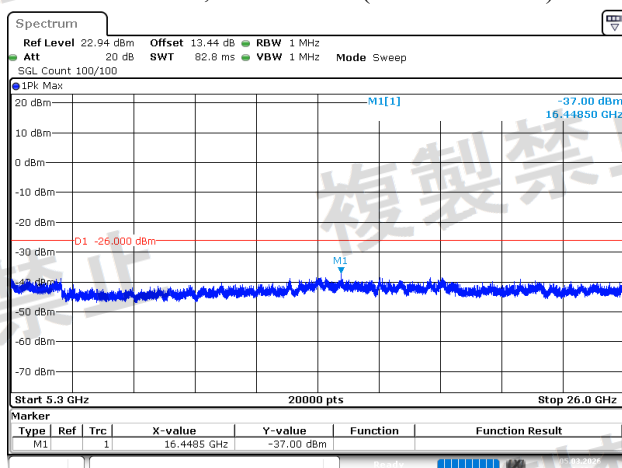


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:10:58

## 802.11ac40, Low Channel(5.1GHz~5.3GHz)

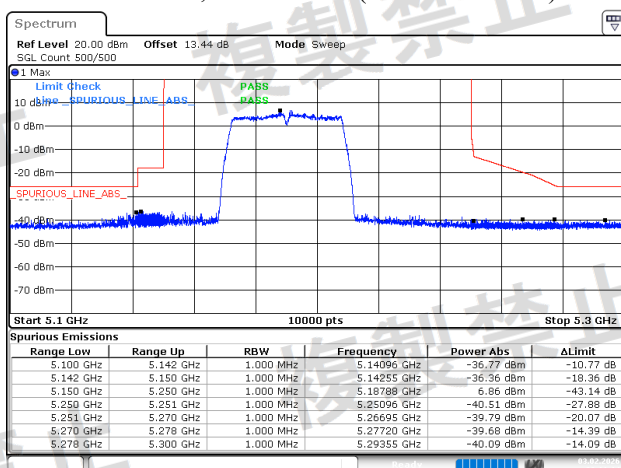


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 23:11:14

## 802.11ac40, High Channel(30MHz~5.1GHz)

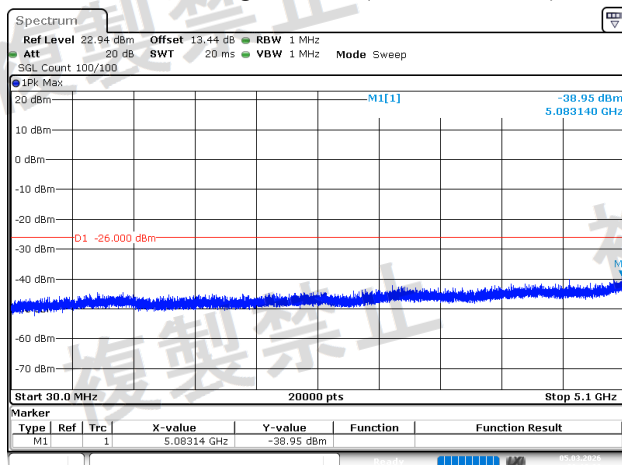


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:12:23

## 802.11ac40, High Channel(5.3GHz~26GHz)

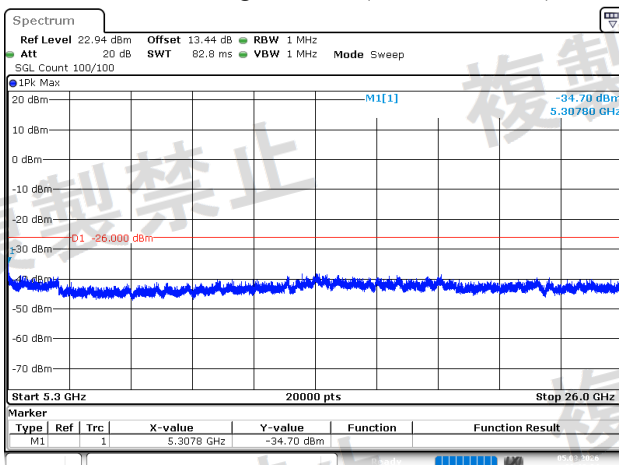


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:13:04

## 802.11ac40, High Channel(5.1GHz~5.3GHz)

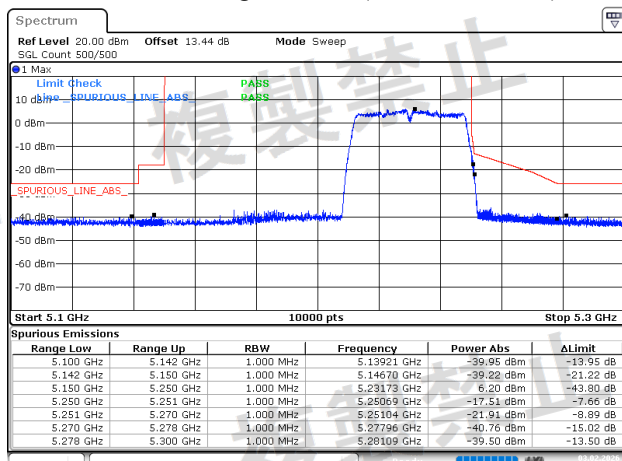


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 23:13:46

## 802.11ac80, Middle Channel(30MHz~5.1GHz)

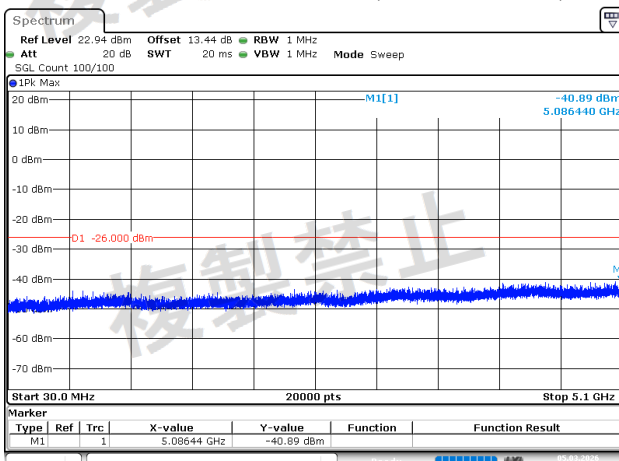


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 05:43:47

## 802.11ac80, Middle Channel(5.1GHz~5.35GHz)

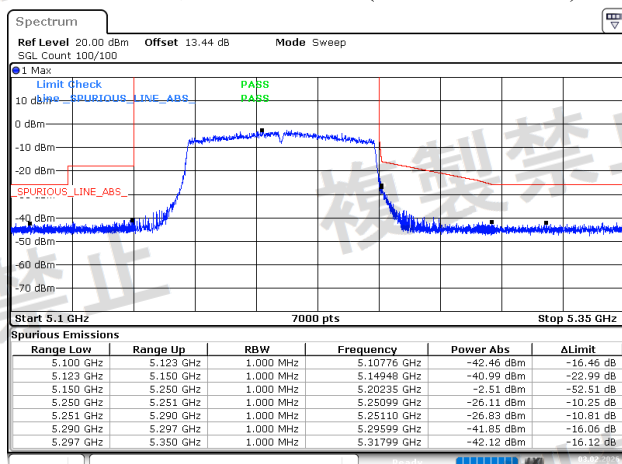


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 23:35:10

## 802.11ac80, Middle Channel(5.35GHz~26GHz)

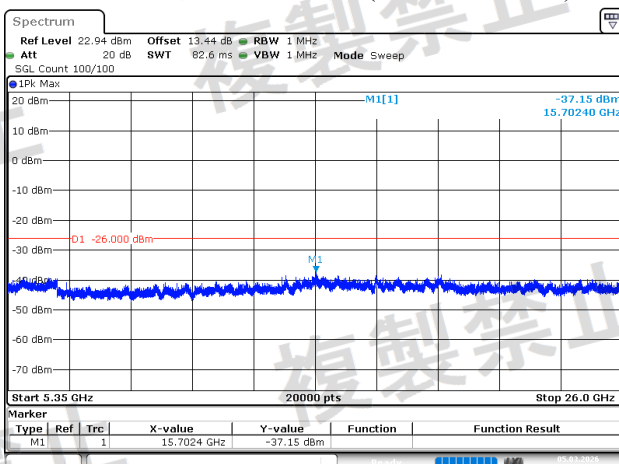


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 05:44:25


## 802.11ax20, Low Channel(30MHz~5.1GHz)

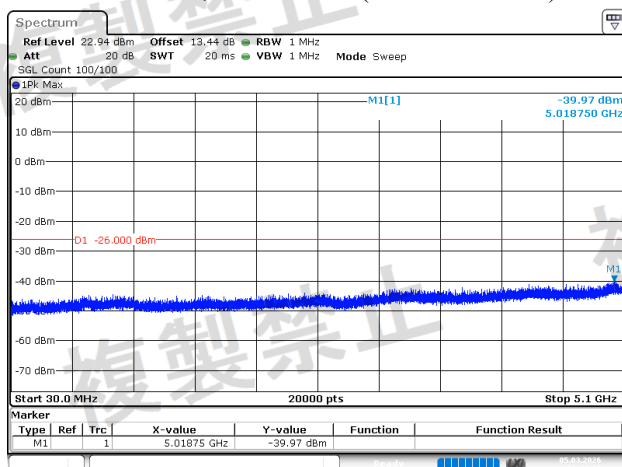


## 802.11ax20, Low Channel(5.3GHz~26GHz)

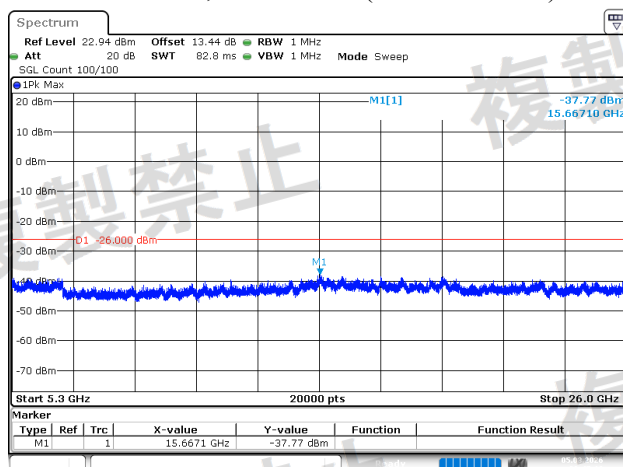


## 802.11ax20, Low Channel(5.1GHz~5.3GHz)

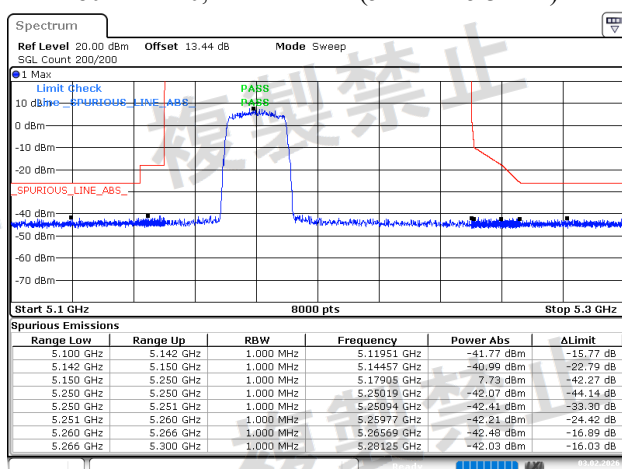


## 802.11ax20, Middle Channel(30MHz~5.1GHz)

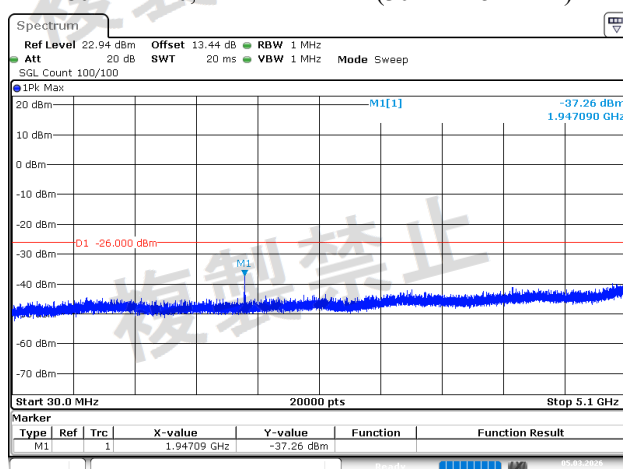


## 802.11ax20, Middle Channel(5.3GHz~26GHz)

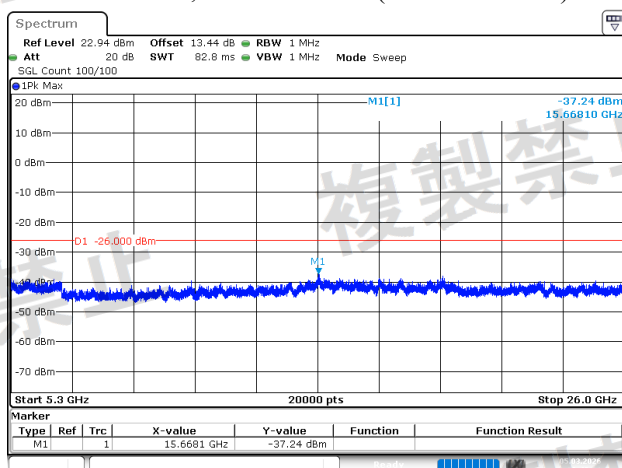


## 802.11ax20, Middle Channel(5.1GHz~5.3GHz)

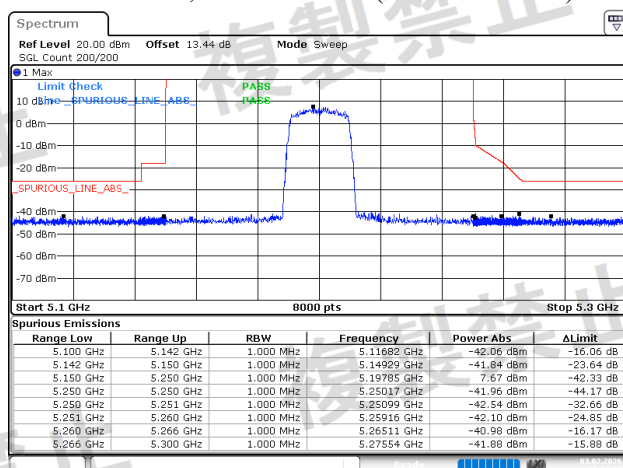


## 802.11ax20, High Channel(30MHz~5.1GHz)

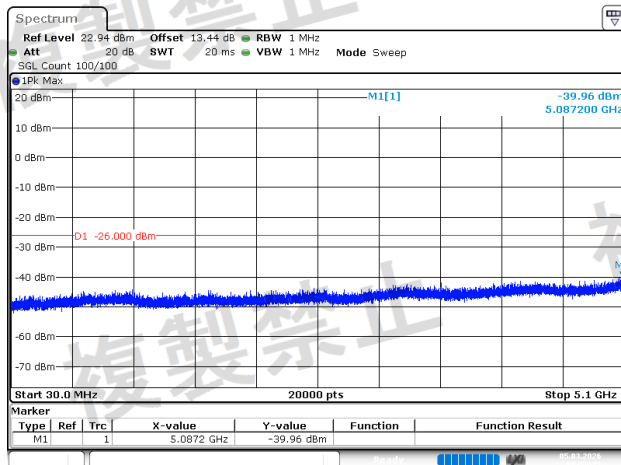


## 802.11ax20, High Channel(5.3GHz~26GHz)

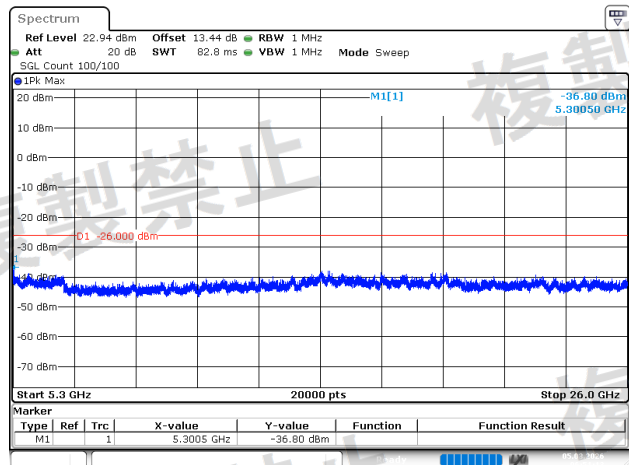


## 802.11ax20, High Channel(5.1GHz~5.3GHz)

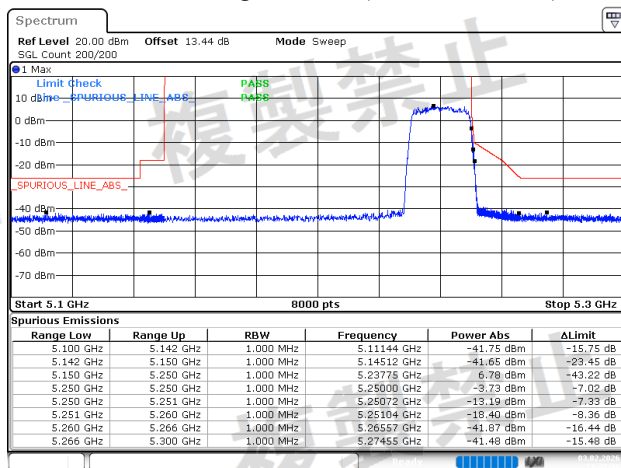


## 802.11ax40, Low Channel(30MHz~5.1GHz)

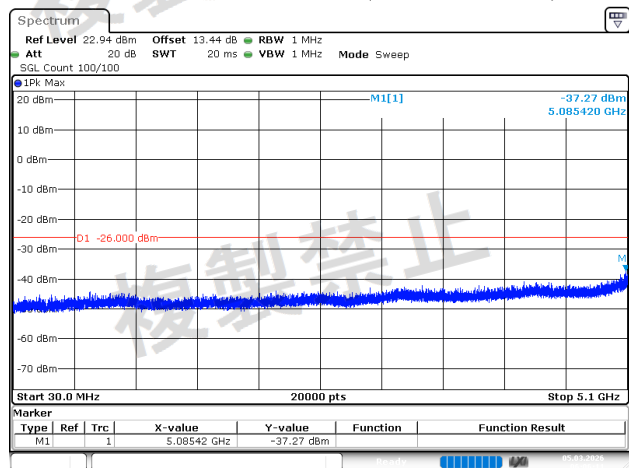


## 802.11ax40, Low Channel(5.3GHz~26GHz)

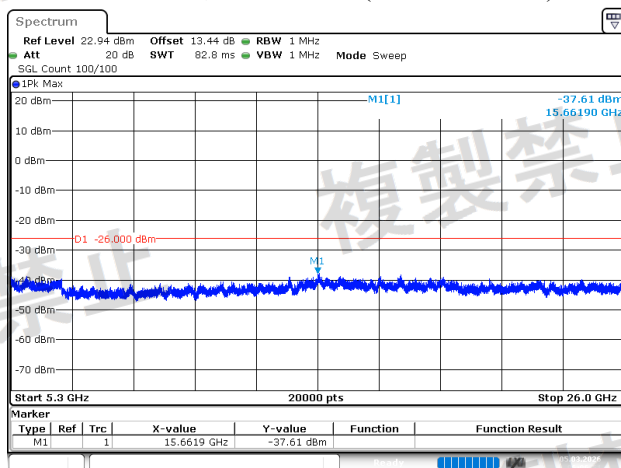


## 802.11ax40, Low Channel(5.1GHz~5.3GHz)

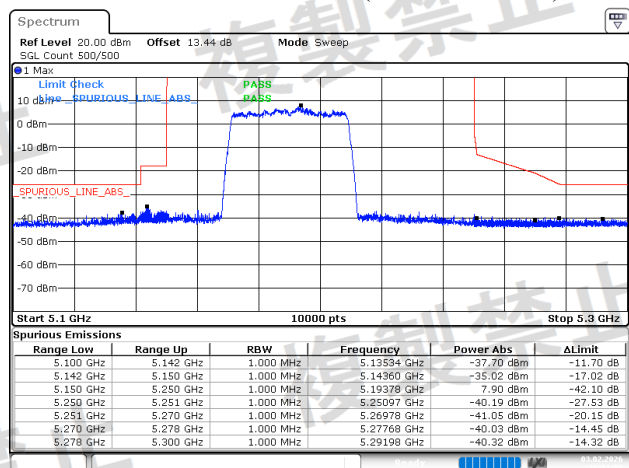


## 802.11ax40, High Channel(30MHz~5.1GHz)

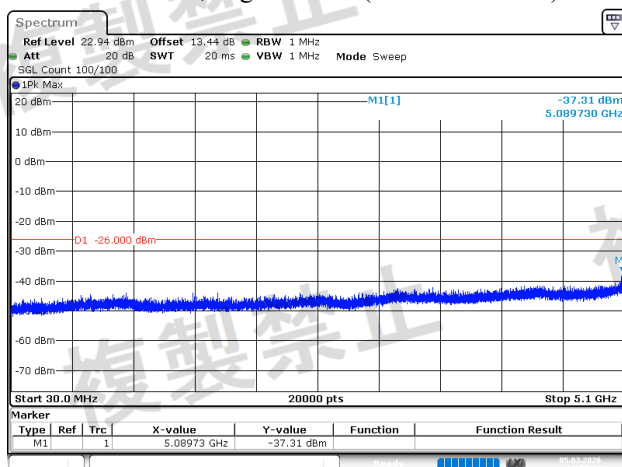


## 802.11ax40, High Channel(5.3GHz~26GHz)

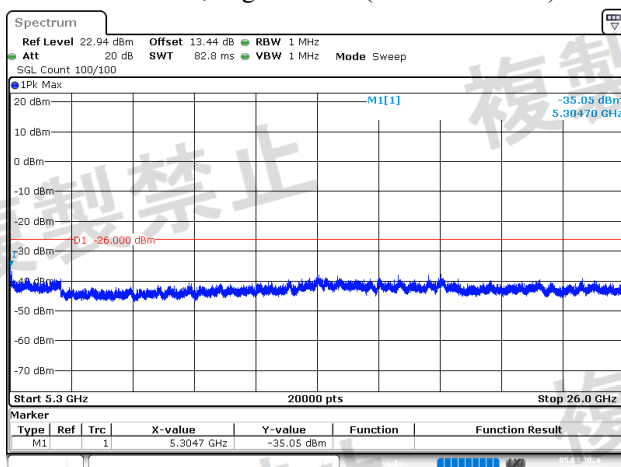


## 802.11ax40, High Channel(5.1GHz~5.3GHz)

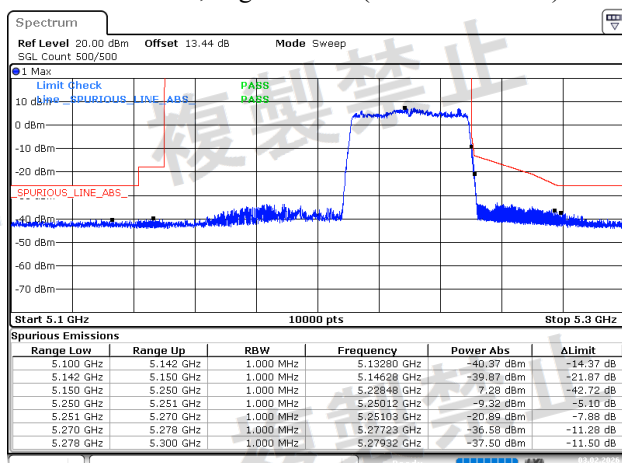


## 802.11ax80, Middle Channel(30MHz~5.1GHz)

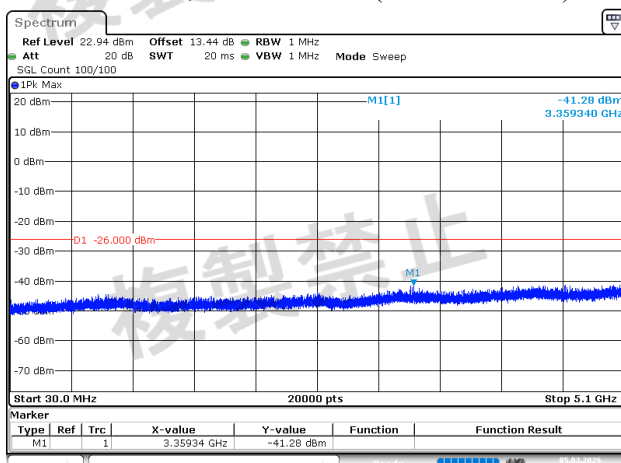

## 802.11ax80, Middle Channel(5.1GHz~5.3GHz)

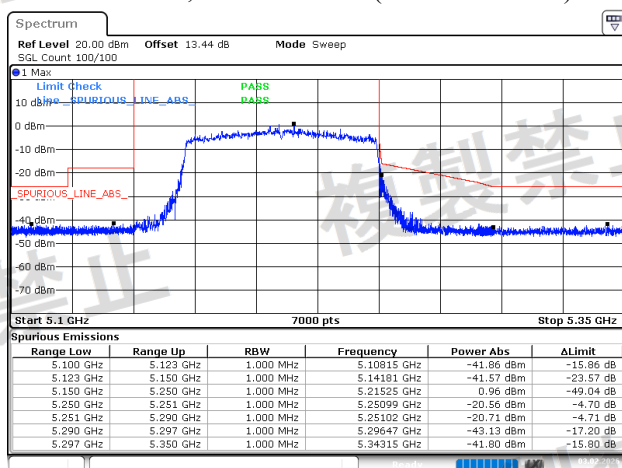


## 802.11ax80, Middle Channel(5.35GHz~26GHz)

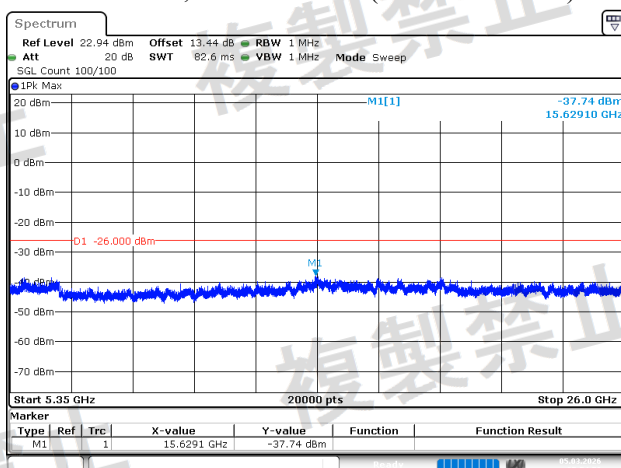


## W52, Chain 0+Chain 1, Test Condition: NV

802.11ac20, Low Channel(5.1GHz~5.3GHz)

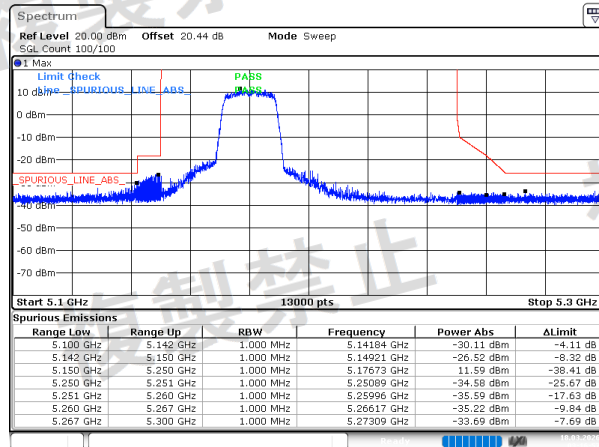


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 03:16:57

802.11ac20, Middle Channel(5.1GHz~5.3GHz)

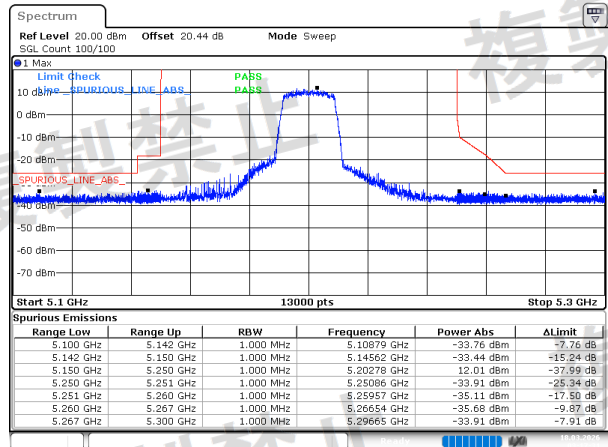


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 03:17:31

802.11ac20, High Channel(5.1GHz~5.3GHz)

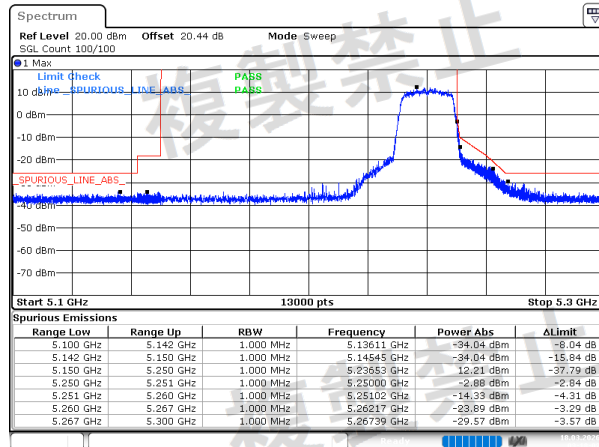


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 03:18:02

802.11ac40, Low Channel(5.1GHz~5.3GHz)

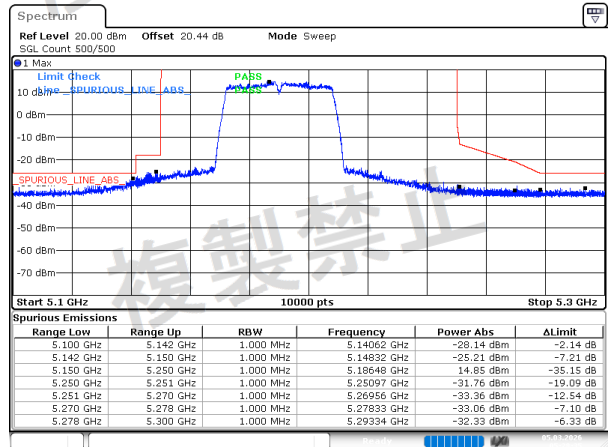


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 05:20:35

802.11ac40, High Channel(5.1GHz~5.3GHz)

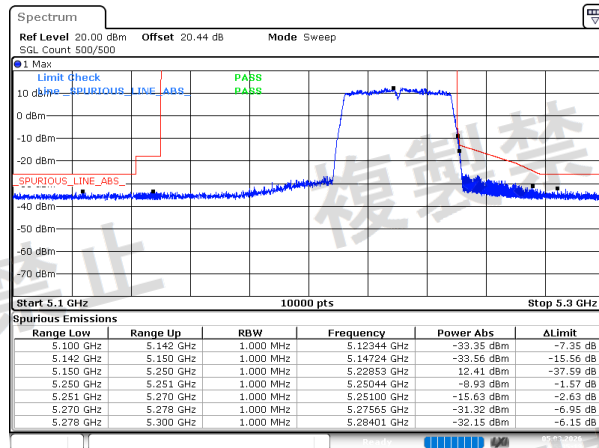


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 05:35:13

802.11ac80, Middle Channel(5.1GHz~5.35GHz)

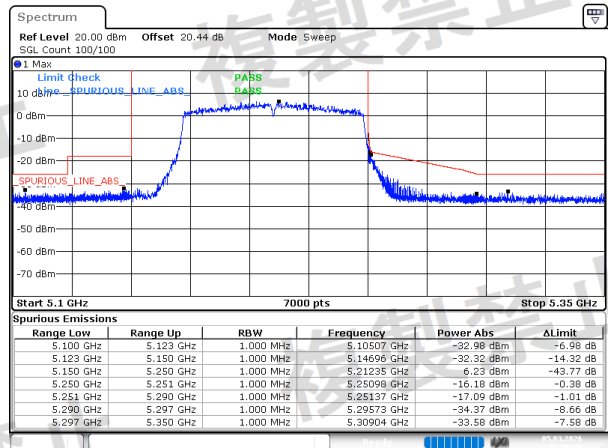

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 05:36:21


## 802.11ax20, Low Channel(5.1GHz~5.3GHz)

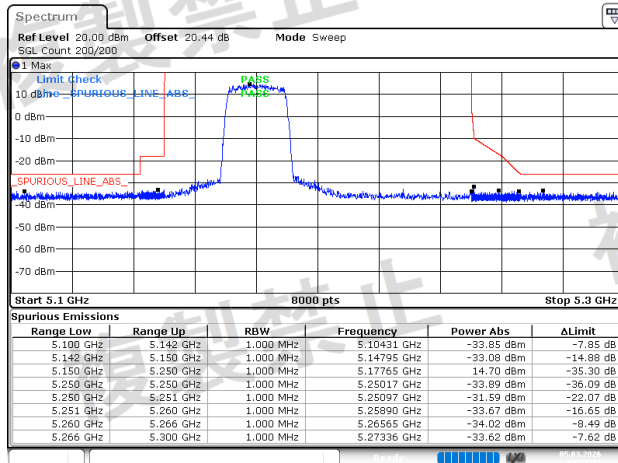

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang

Date: 5.MAR.2026 04:34:14


## 802.11ax20, Middle Channel(5.1GHz~5.3GHz)

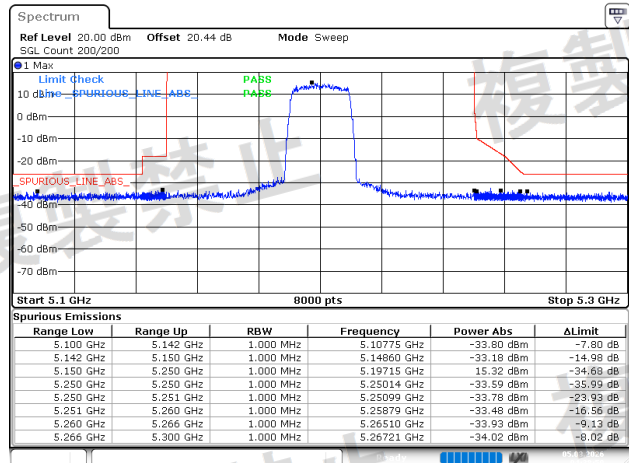

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang

Date: 5.MAR.2026 04:38:59


## 802.11ax20, High Channel(5.1GHz~5.3GHz)

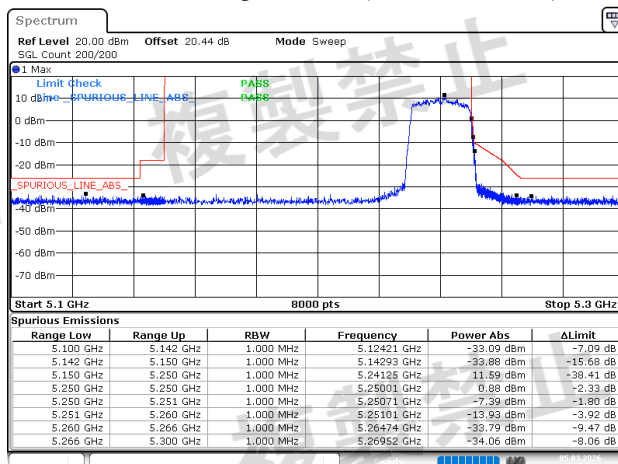

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang

Date: 5.MAR.2026 05:12:04


## 802.11ax40, Low Channel(5.1GHz~5.3GHz)

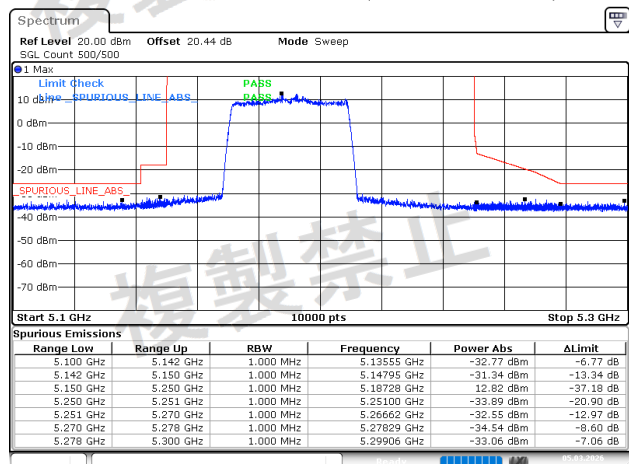

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang

Date: 5.MAR.2026 04:46:22


## 802.11ax40, High Channel(5.1GHz~5.3GHz)

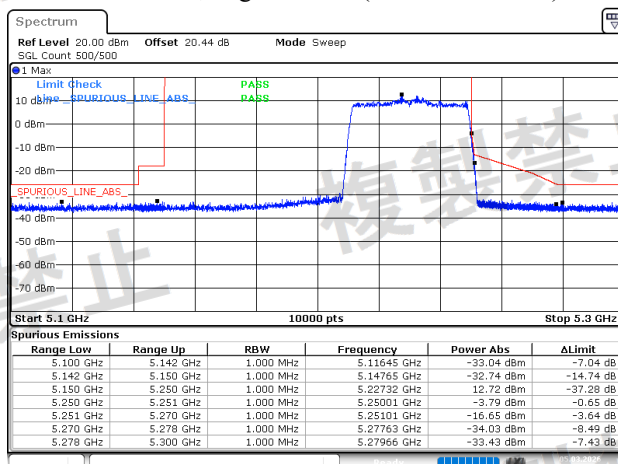

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang

Date: 5.MAR.2026 04:47:17

## 802.11ax80, Middle Channel(5.1GHz~5.3GHz)

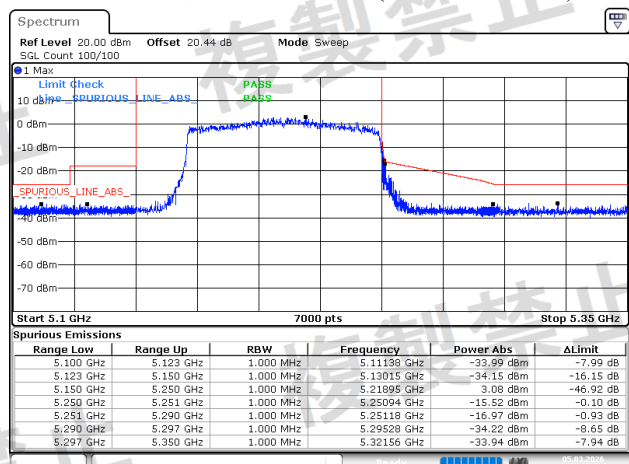


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang

Date: 5.MAR.2026 04:49:03


## W53, Chain 0, Test Condition: NV

## 802.11a, Low Channel(30MHz~5.2GHz)

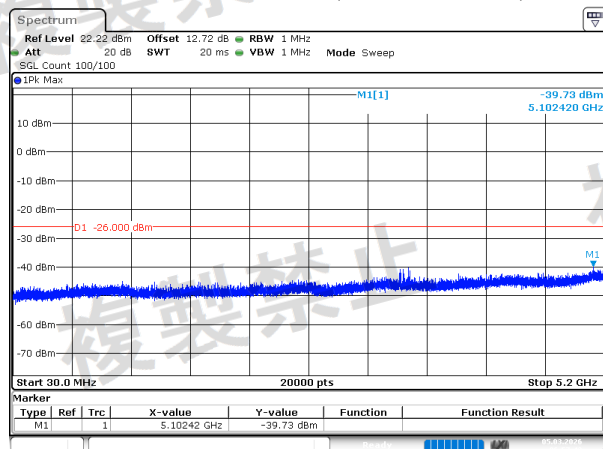


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:57:43

## 802.11a, Low Channel(5.4GHz~26GHz)

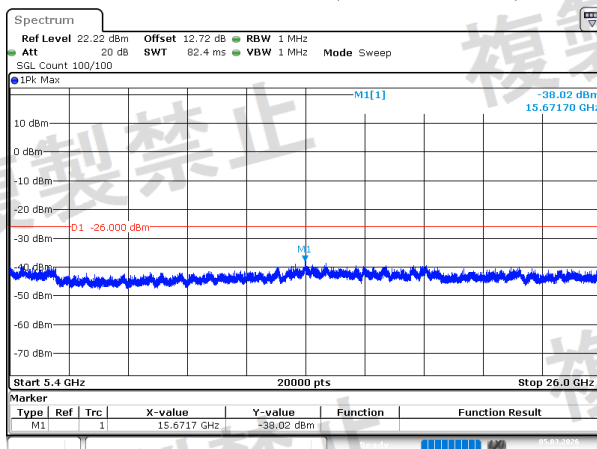


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:58:23

## 802.11a, Low Channel(5.2GHz~5.4GHz)

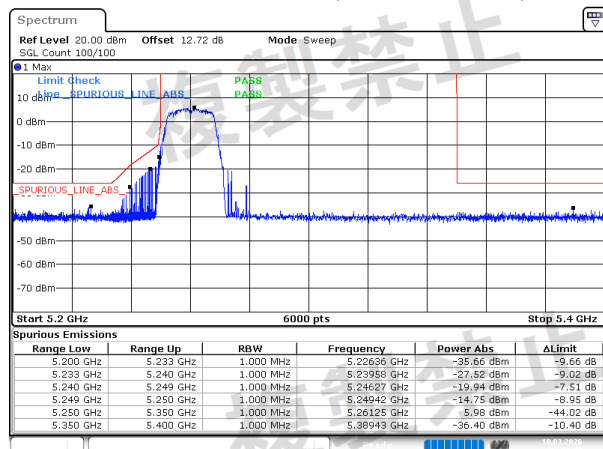


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 04:01:00

## 802.11a, Middle Channel(30MHz~5.2GHz)

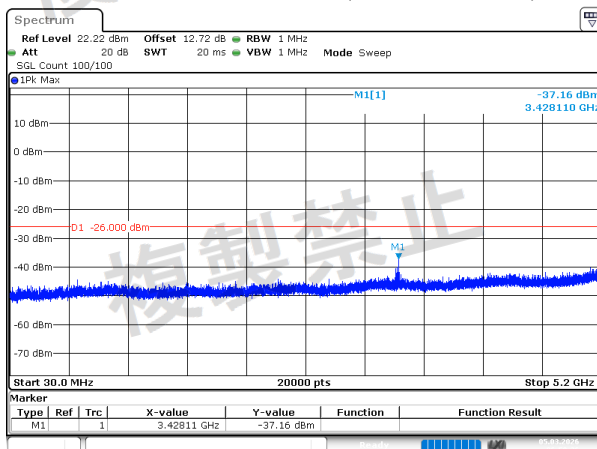


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:59:36

## 802.11a, Middle Channel(5.4GHz~26GHz)

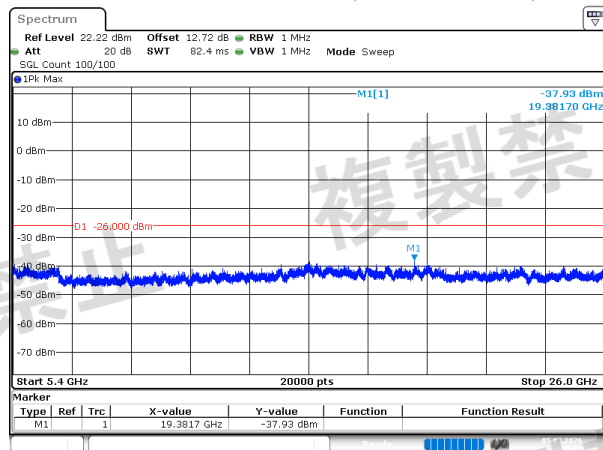


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 07:00:17

## 802.11a, Middle Channel(5.2GHz~5.4GHz)

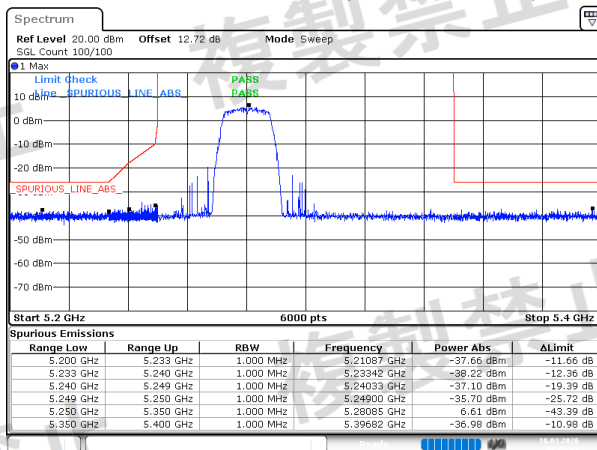


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 04:02:09

## 802.11a, High Channel(30MHz~5.2GHz)

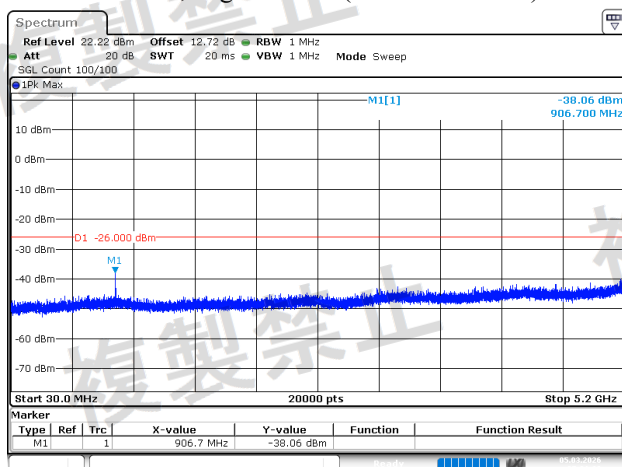


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 07:01:39

## 802.11a, High Channel(5.4GHz~26GHz)

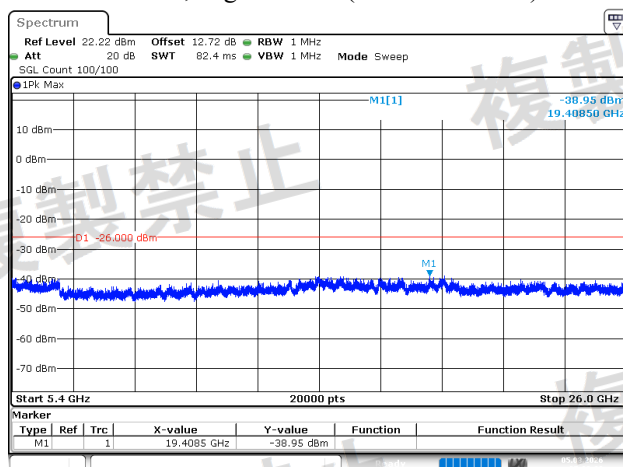


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 07:02:20

## 802.11a, High Channel(5.2GHz~5.4GHz)

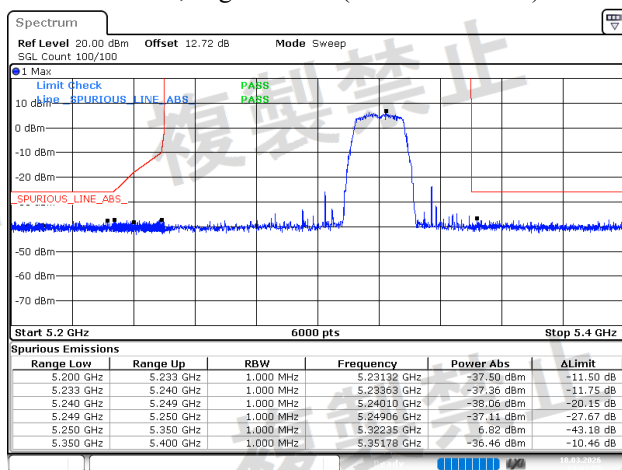


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 19.MAR.2026 04:02:59

## 802.11ac20, Low Channel(30MHz~5.2GHz)

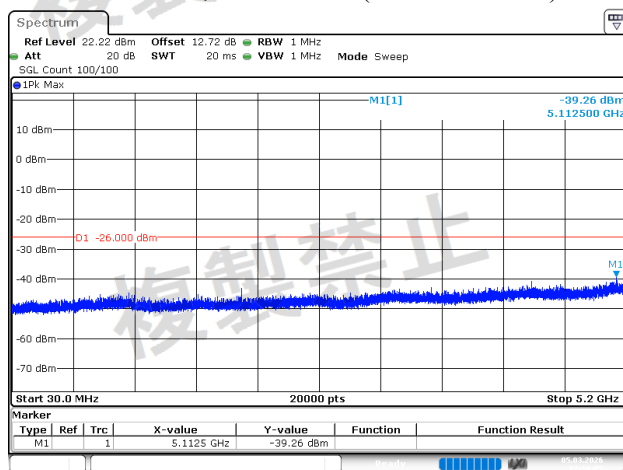


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 07:10:05

## 802.11ac20, Low Channel(5.4GHz~26GHz)

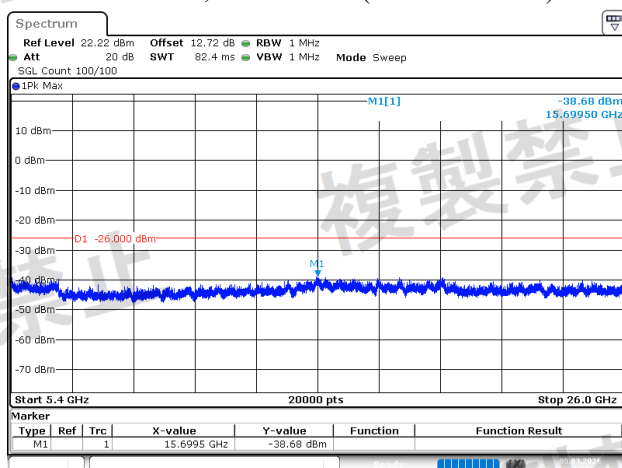


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 07:10:45

## 802.11ac20, Low Channel(5.2GHz~5.4GHz)

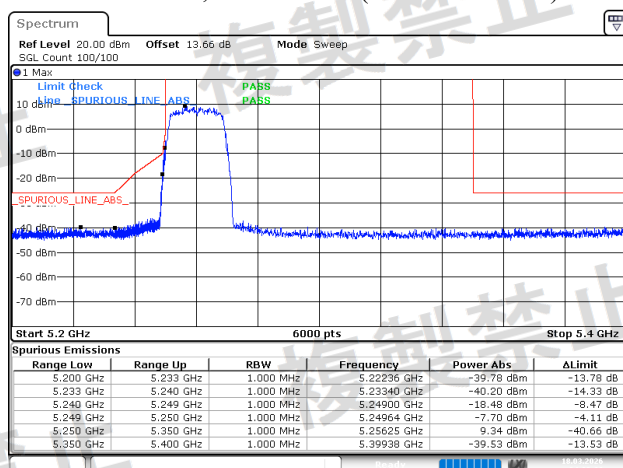


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 04:06:23

## 802.11ac20, Middle Channel(30MHz~5.2GHz)

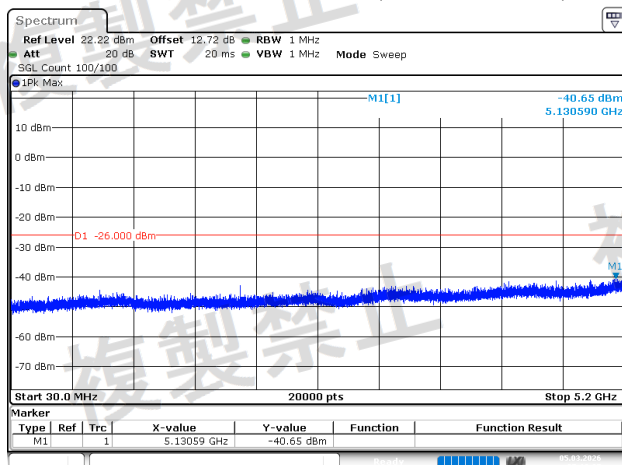


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 07:12:07

## 802.11ac20, Middle Channel(5.4GHz~26GHz)

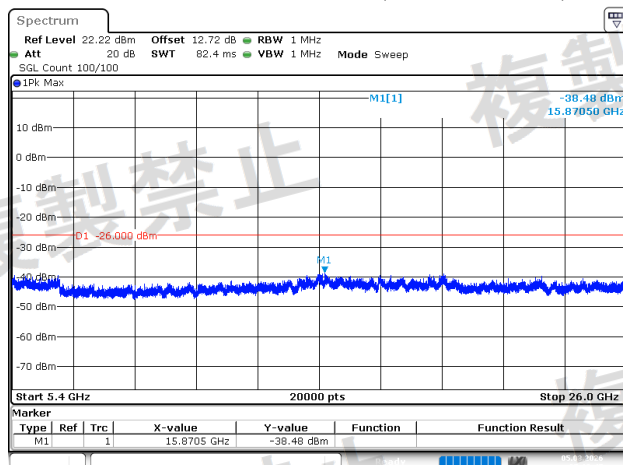


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 07:12:47

## 802.11ac20, Middle Channel(5.2GHz~5.4GHz)

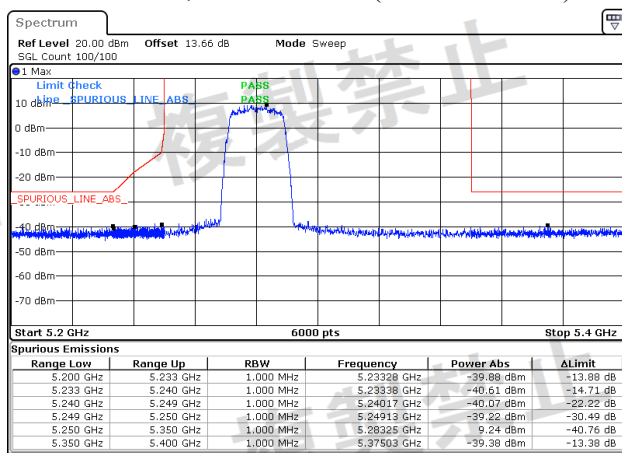


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 19.MAR.2026 04:06:50

## 802.11ac20, High Channel(30MHz~5.2GHz)

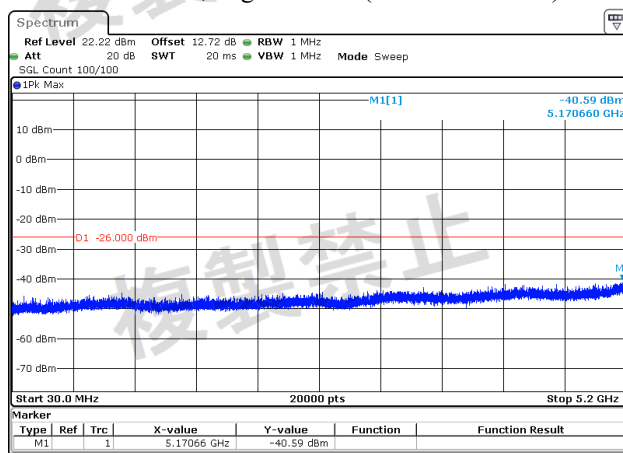


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 07:14:34

## 802.11ac20, High Channel(5.4GHz~26GHz)

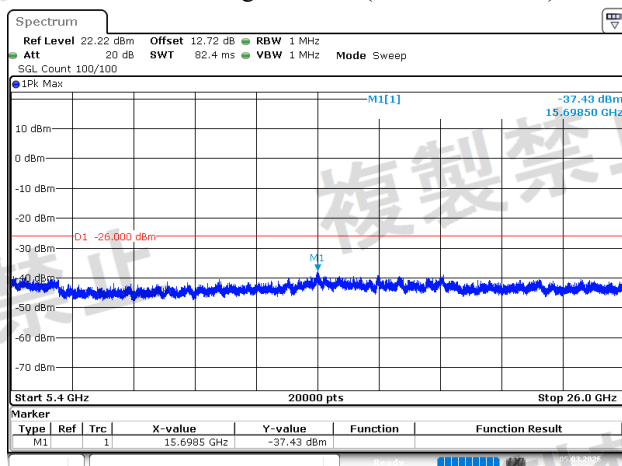


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 07:15:14

## 802.11ac20, High Channel(5.2GHz~5.4GHz)

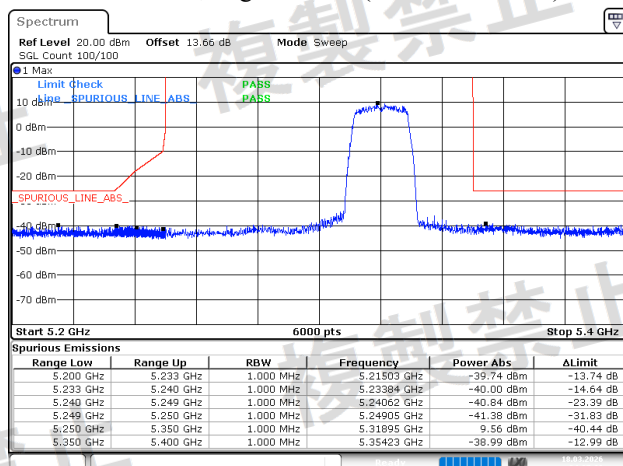


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 04:07:26

## 802.11ac40, Low Channel(30MHz~5.2GHz)

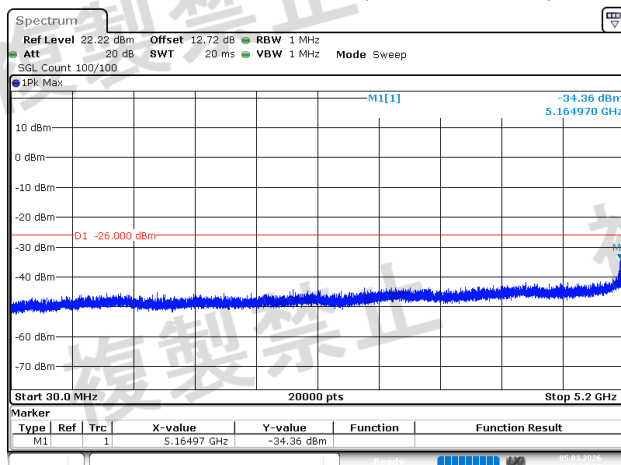


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:18:38

## 802.11ac40, Low Channel(5.4GHz~26GHz)

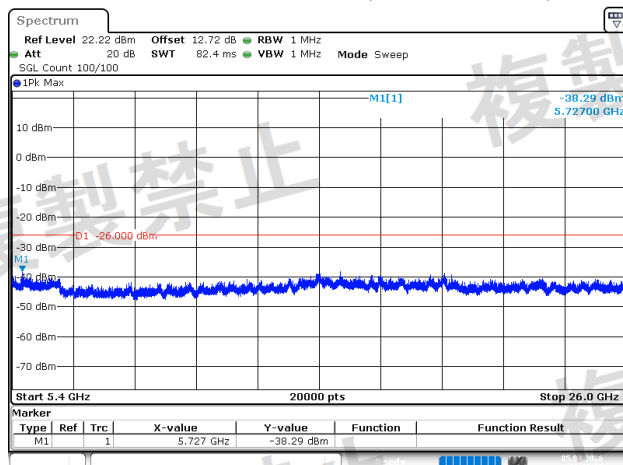


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:19:18

## 802.11ac40, Low Channel(5.2GHz~5.4GHz)

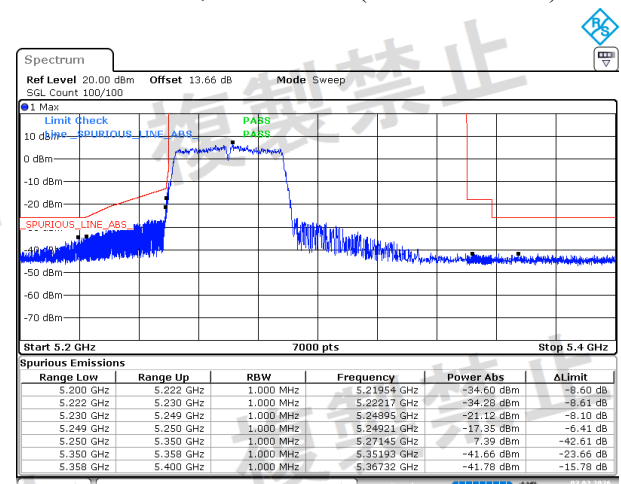


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 00:25:31

## 802.11ac40, High Channel(30MHz~5.2GHz)

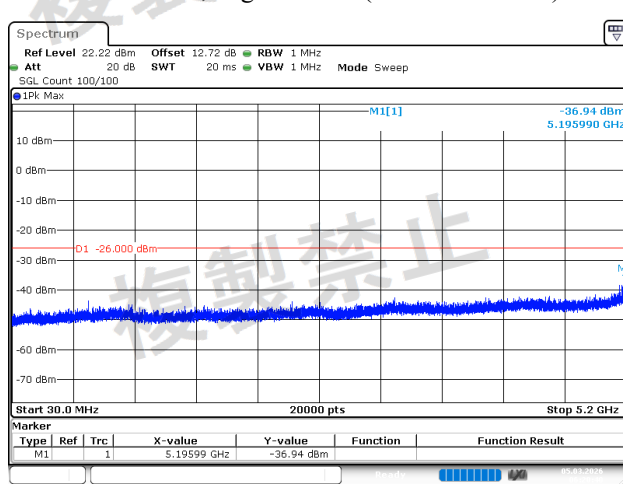


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:20:40

## 802.11ac40, High Channel(5.4GHz~26GHz)

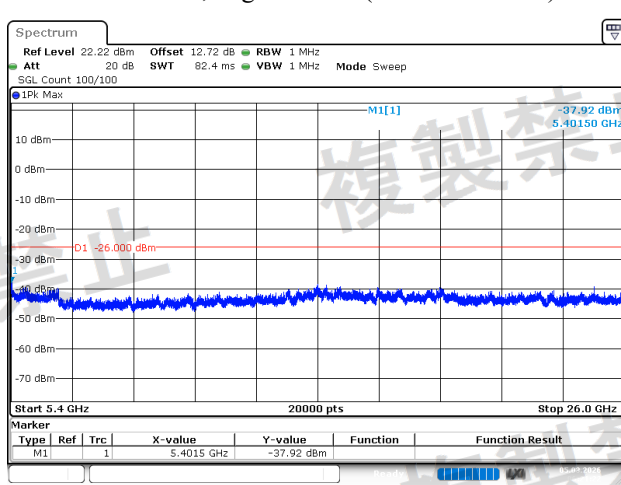


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:21:22

## 802.11ac40, High Channel(5.2GHz~5.4GHz)

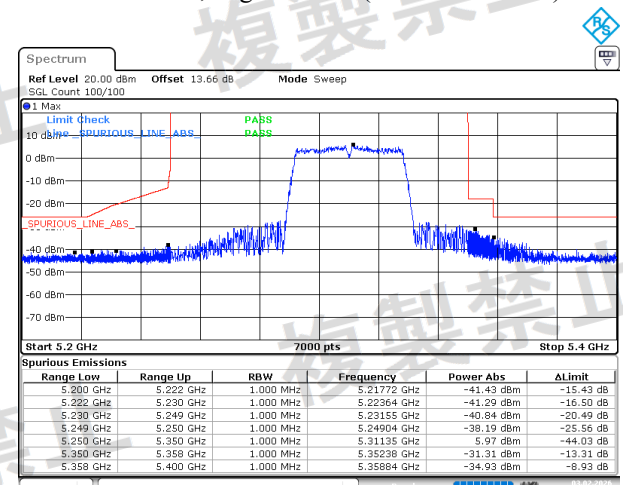


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 00:28:21

## 802.11ac80, Middle Channel(30MHz~5.2GHz)

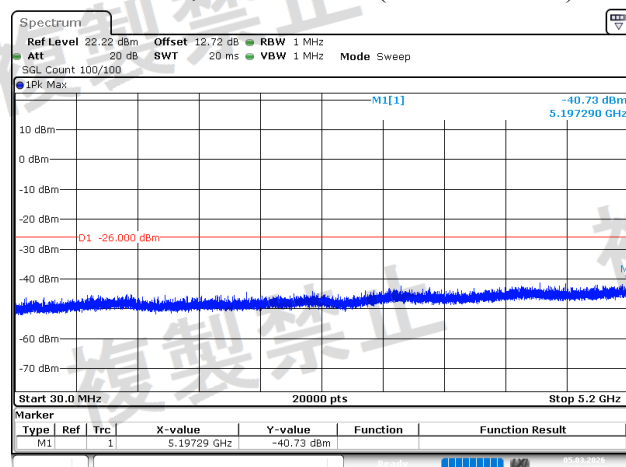


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 05:44:53

## 802.11ac80, Middle Channel(5.4GHz~26GHz)

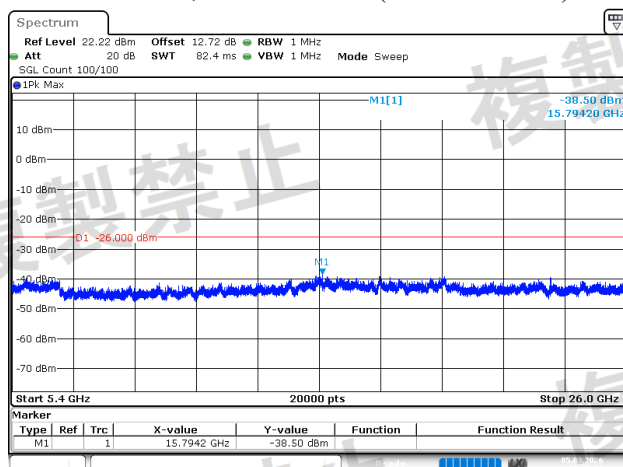


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 05:45:01

## 802.11ac80, Middle Channel(5.2GHz~5.4GHz)

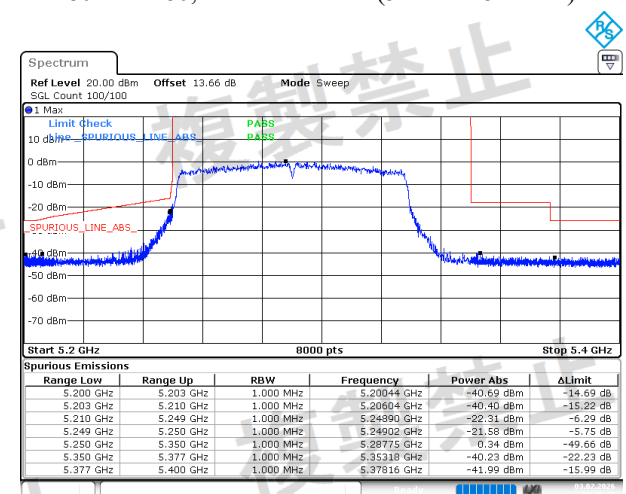


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 00:48:00

## 802.11ax20, Low Channel(30MHz~5.2GHz)

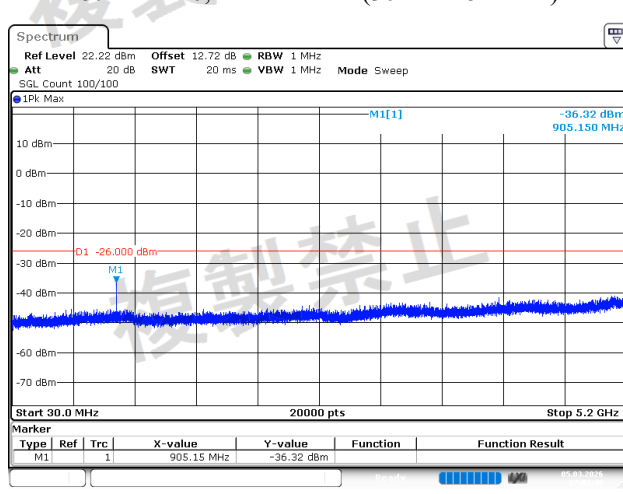


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 07:03:48

## 802.11ax20, Low Channel(5.4GHz~26GHz)

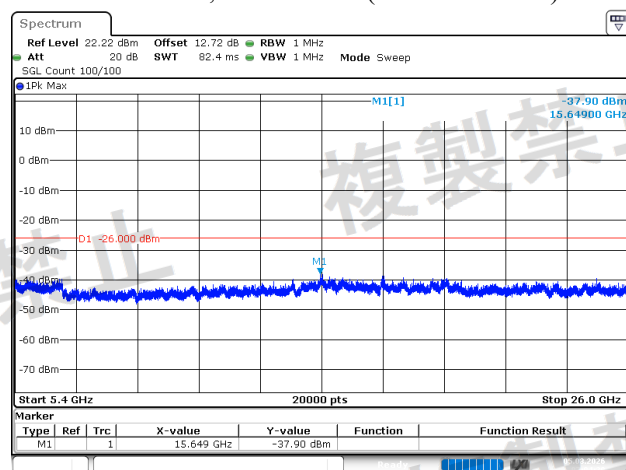


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 07:04:29

## 802.11ax20, Low Channel(5.2GHz~5.4GHz)

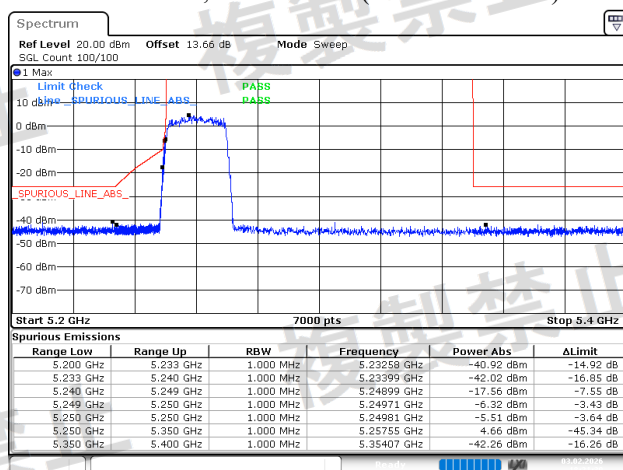


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 18:21:30

## 802.11ax20, Middle Channel(30MHz~5.2GHz)

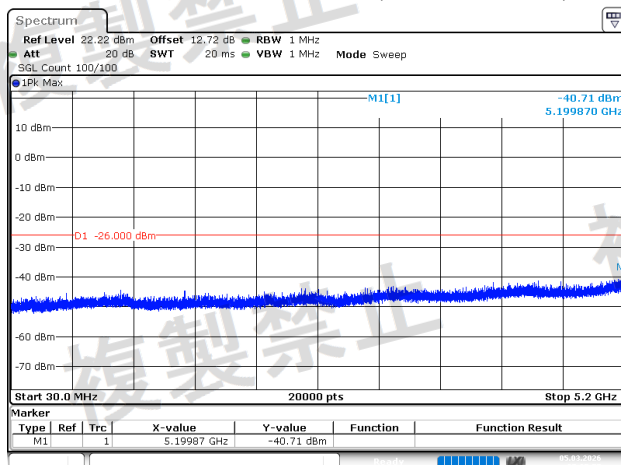


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 07:05:57

## 802.11ax20, Middle Channel(5.4GHz~26GHz)

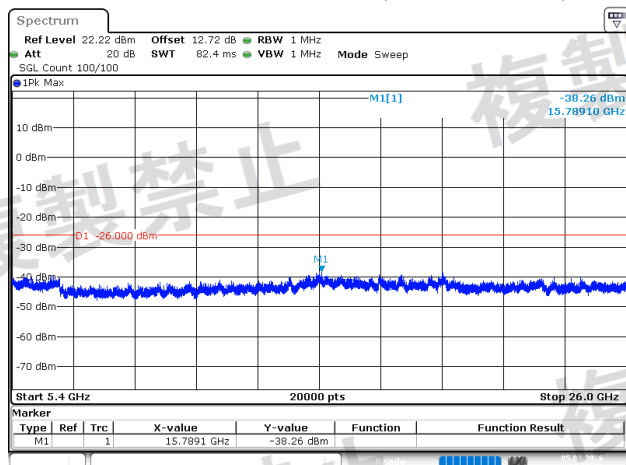


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 07:06:37

## 802.11ax20, Middle Channel(5.2GHz~5.4GHz)

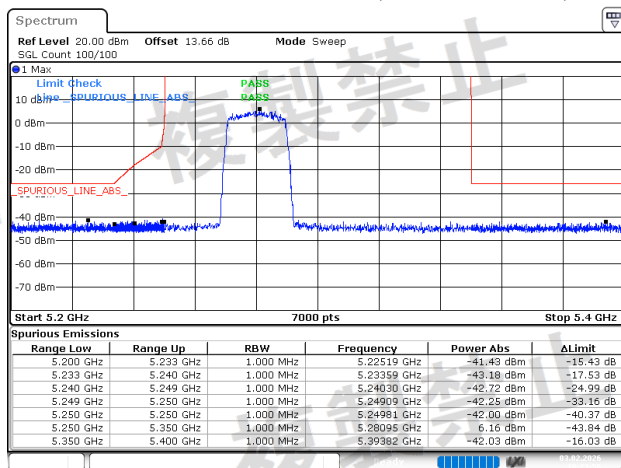


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 18:23:57

## 802.11ax20, High Channel(30MHz~5.2GHz)

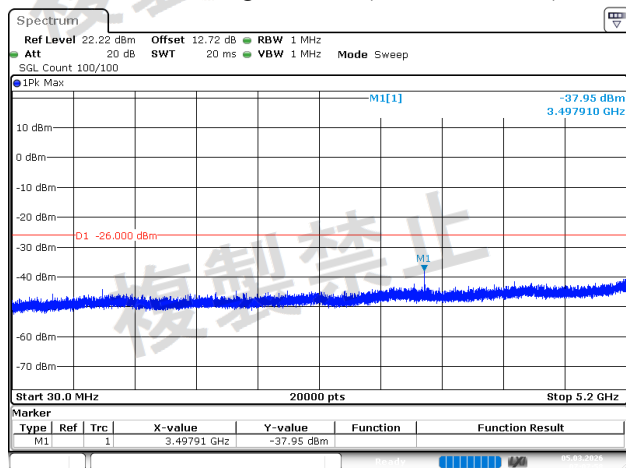


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 07:07:58

## 802.11ax20, High Channel(5.4GHz~26GHz)

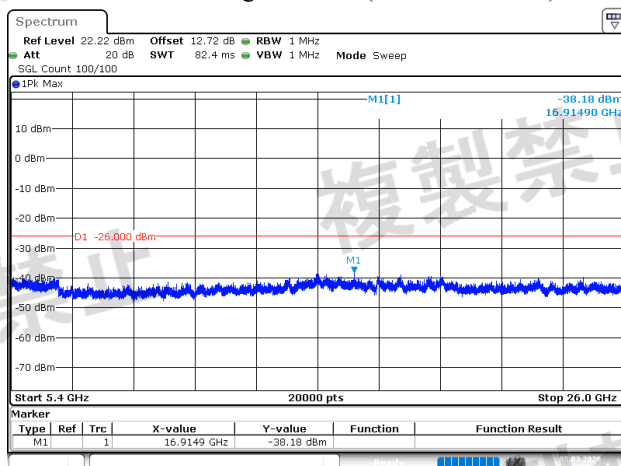


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 07:08:38

## 802.11ax20, High Channel(5.2GHz~5.4GHz)

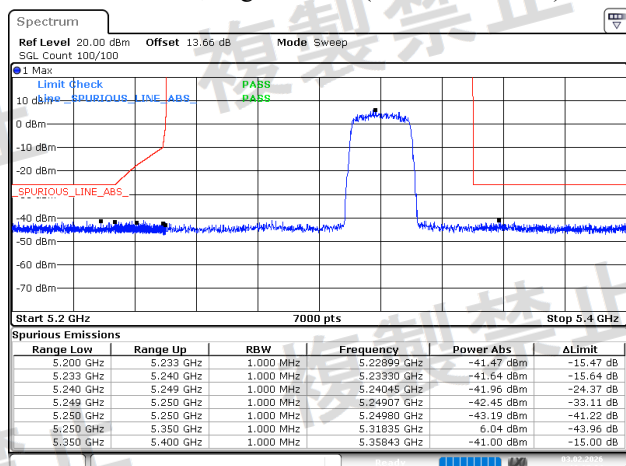


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 18:27:05

## 802.11ax40, Low Channel(30MHz~5.2GHz)

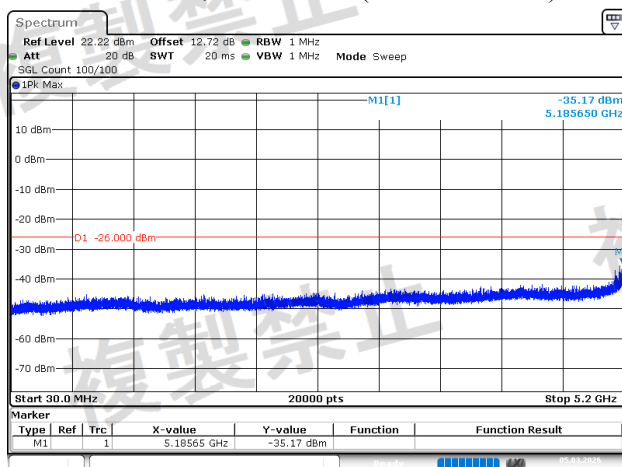


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:13:38

## 802.11ax40, Low Channel(5.4GHz~26GHz)

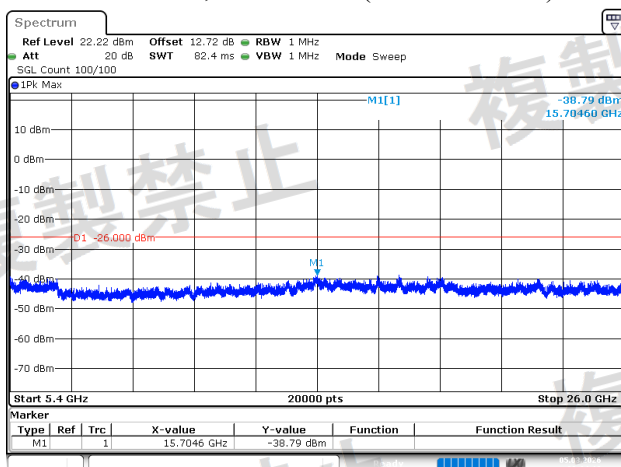


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:14:19

## 802.11ax40, Low Channel(5.2GHz~5.4GHz)

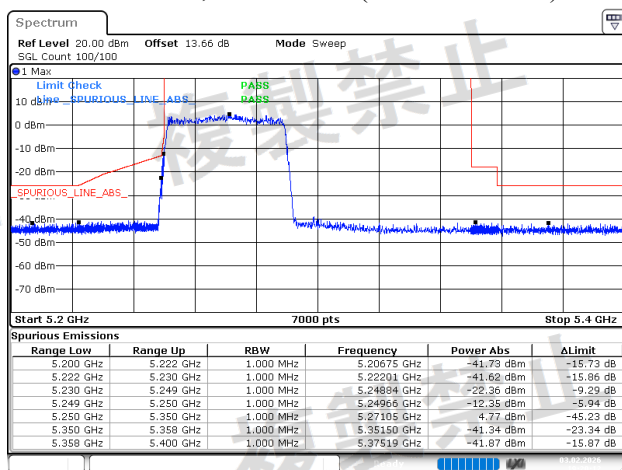


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 19:20:13

## 802.11ax40, High Channel(30MHz~5.2GHz)

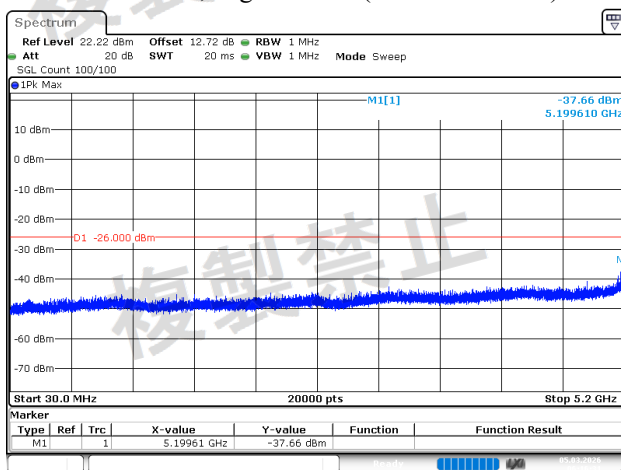


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:16:31

## 802.11ax40, High Channel(5.4GHz~26GHz)

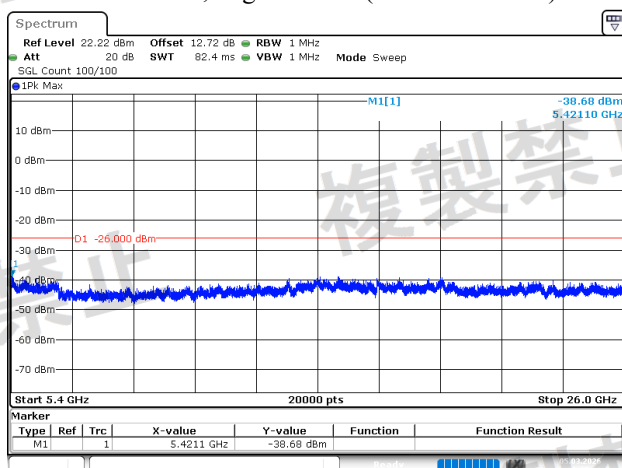


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:17:11

## 802.11ax40, High Channel(5.2GHz~5.4GHz)

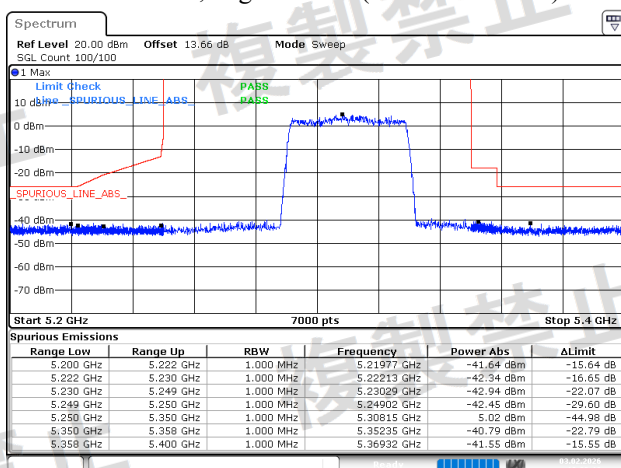


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 19:28:20

## 802.11ax80, Middle Channel(30MHz~5.2GHz)

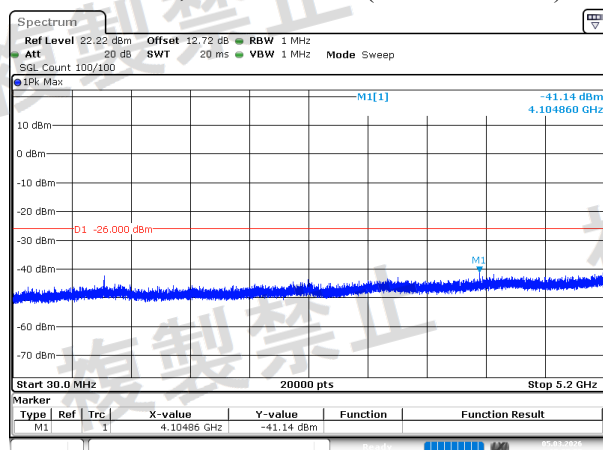

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 05:55:57


## 802.11ax80, Middle Channel(5.4GHz~26GHz)

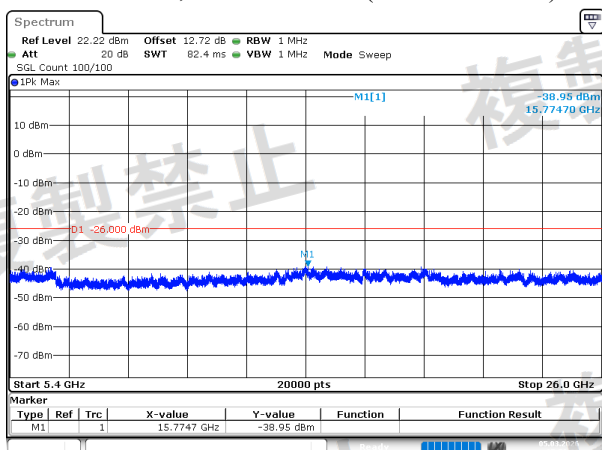

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 05:56:39


## W53, Chain 1, Test Condition: NV

## 802.11ax80, Middle Channel(5.2GHz~5.4GHz)

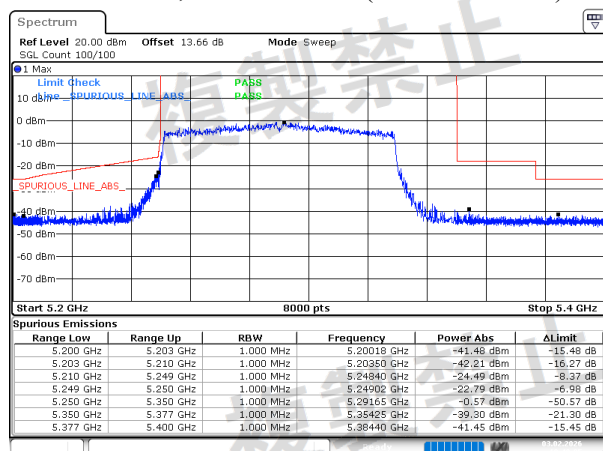


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 19:40:05

## 802.11a, Low Channel(30MHz~5.2GHz)

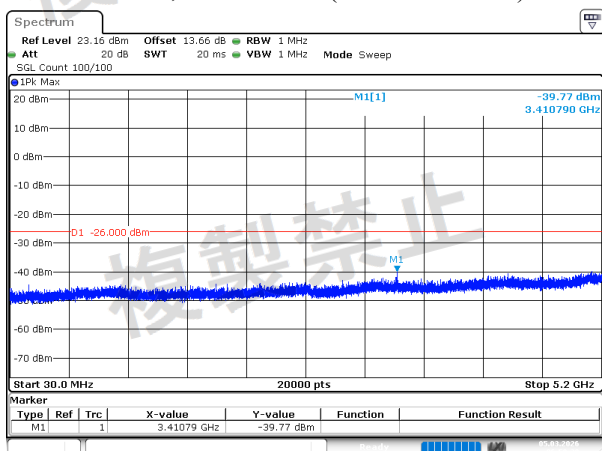


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:58:40

## 802.11a, Low Channel(5.4GHz~26GHz)

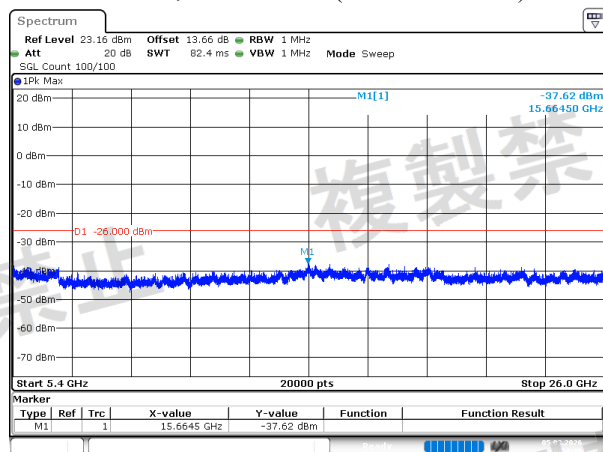


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:59:19

## 802.11a, Low Channel(5.2GHz~5.4GHz)

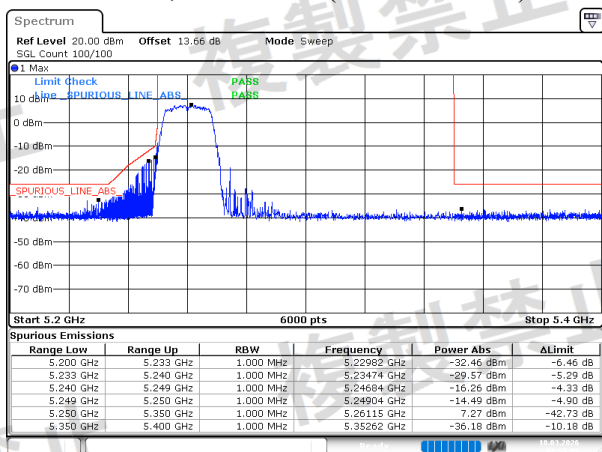


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 10.MAR.2026 03:55:06

## 802.11a, Middle Channel(30MHz~5.2GHz)

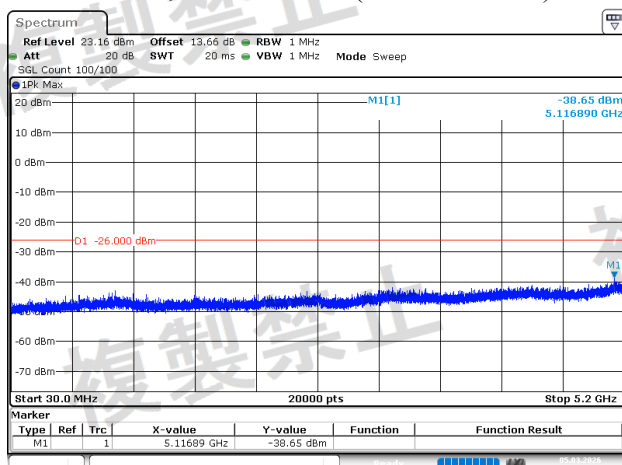


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 07:00:41

## 802.11a, Middle Channel(5.4GHz~26GHz)

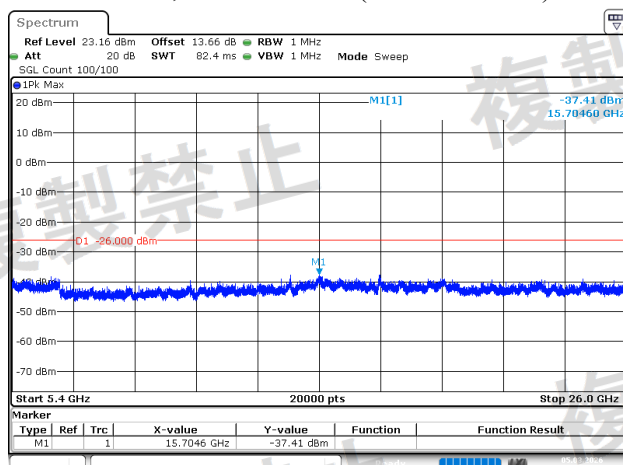


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 07:01:21

## 802.11a, Middle Channel(5.2GHz~5.4GHz)

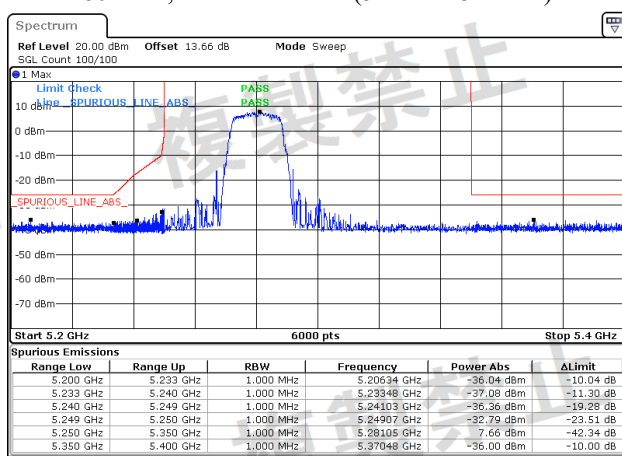


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 03:50:16

## 802.11a, High Channel(30MHz~5.2GHz)

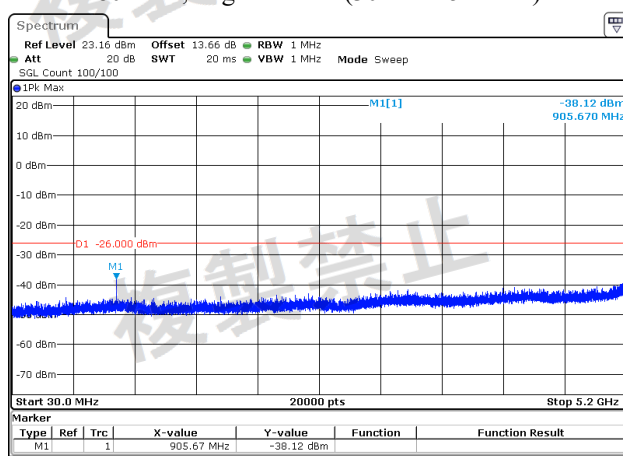


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 07:02:47

## 802.11a, High Channel(5.4GHz~26GHz)

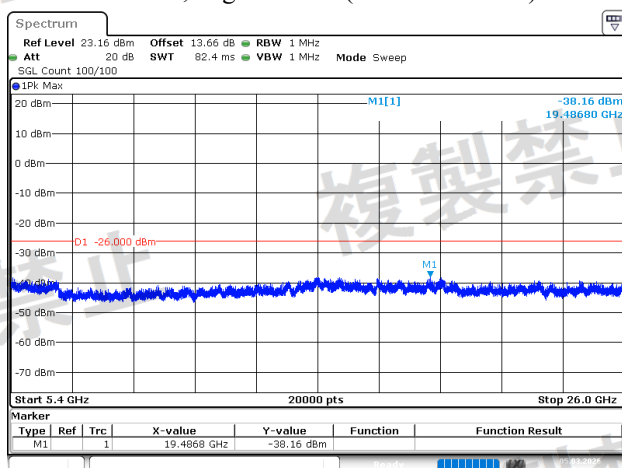


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 07:03:27

## 802.11a, High Channel(5.2GHz~5.4GHz)

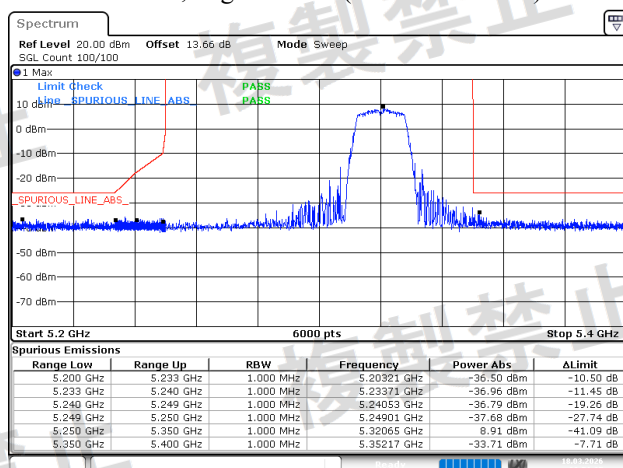


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 03:51:25

## 802.11ac20, Low Channel(30MHz~5.2GHz)

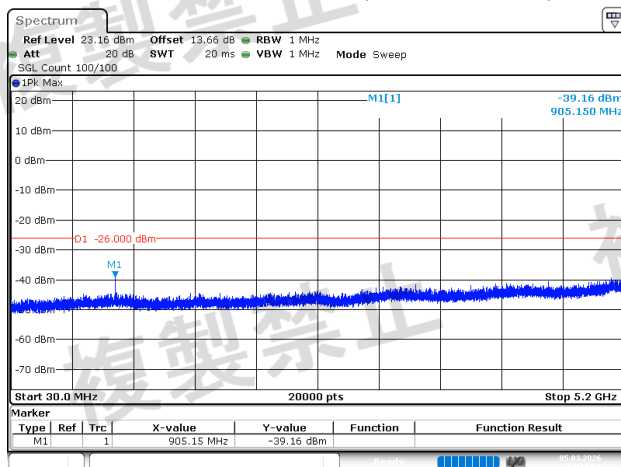


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 07:11:03

## 802.11ac20, Low Channel(5.4GHz~26GHz)

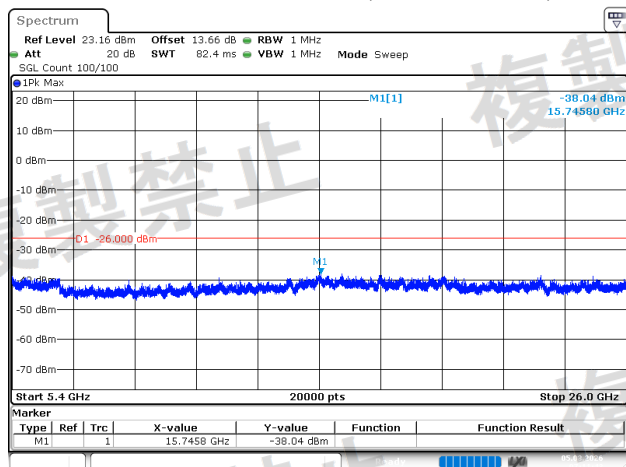


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 07:11:43

## 802.11ac20, Low Channel(5.2GHz~5.4GHz)

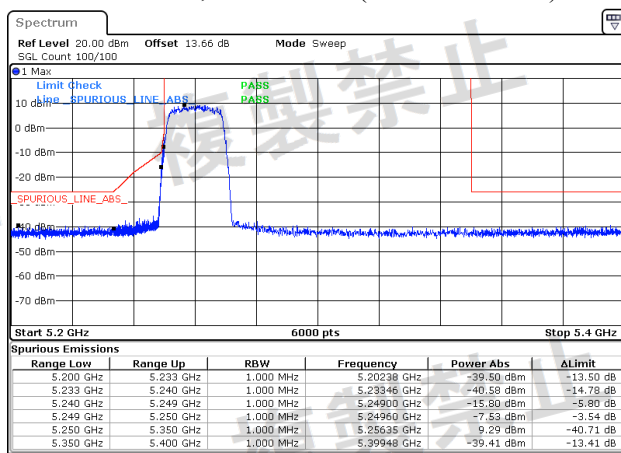


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 19.MAR.2026 04:11:33

## 802.11ac20, Middle Channel(30MHz~5.2GHz)

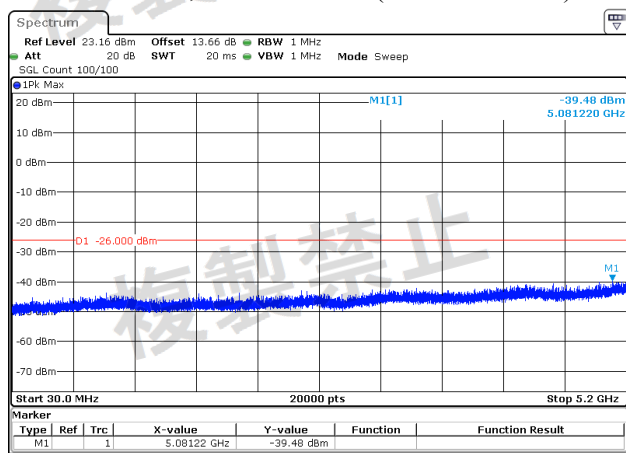


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 07:13:03

## 802.11ac20, Middle Channel(5.4GHz~26GHz)

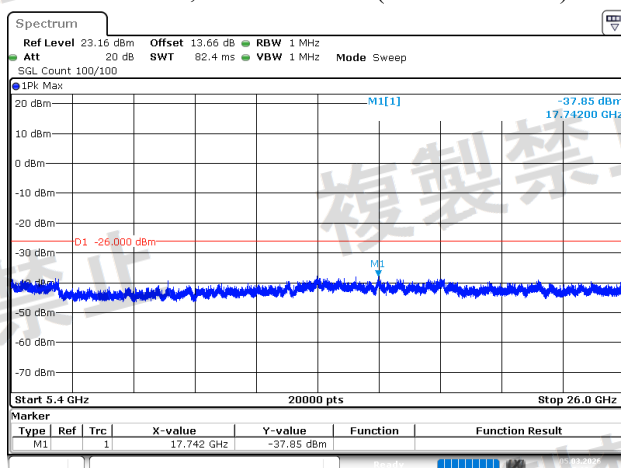


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 07:13:44

## 802.11ac20, Middle Channel(5.2GHz~5.4GHz)

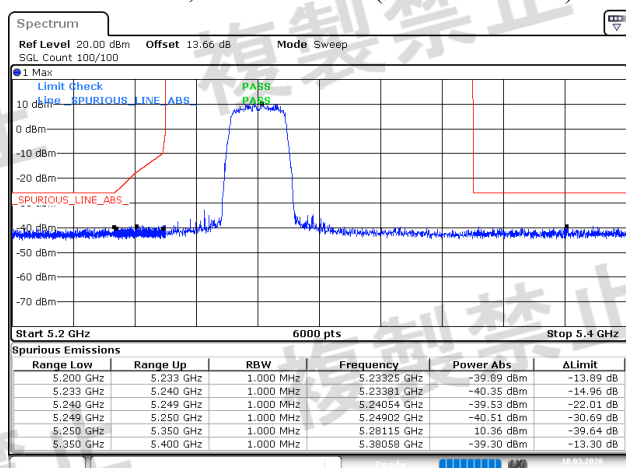


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 04:11:57


## 802.11ac20, High Channel(30MHz~5.2GHz)

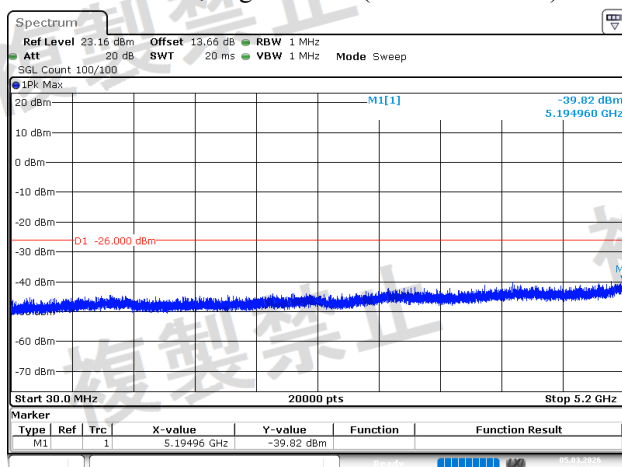


## 802.11ac20, High Channel(5.4GHz~26GHz)

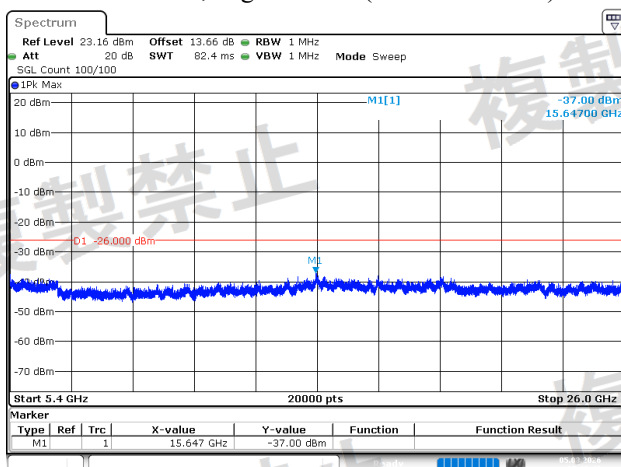


## 802.11ac20, High Channel(5.2GHz~5.4GHz)

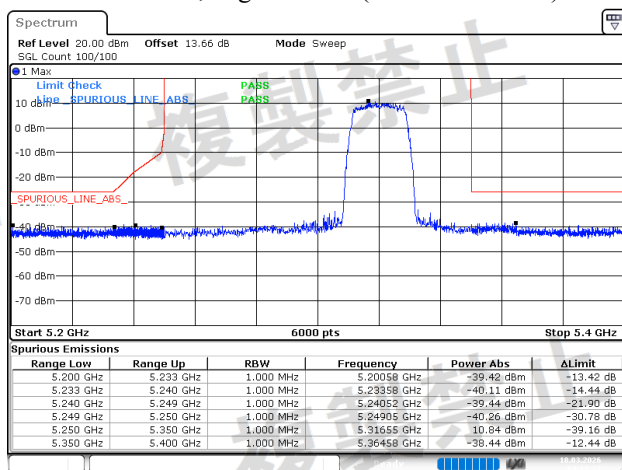


## 802.11ac40, Low Channel(30MHz~5.2GHz)

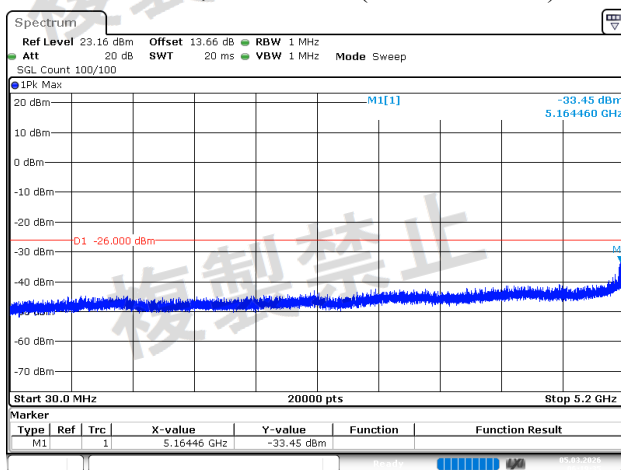


## 802.11ac40, Low Channel(5.4GHz~26GHz)

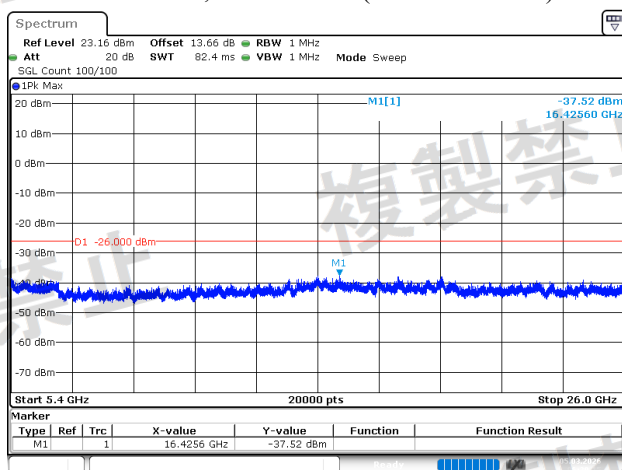

## 802.11ac40, Low Channel(5.2GHz~5.4GHz)

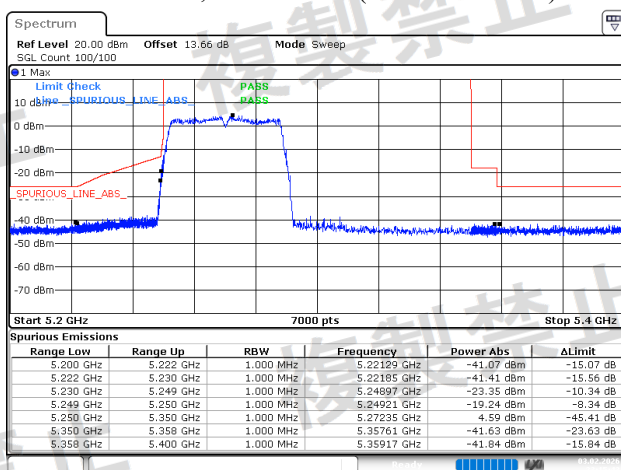


## 802.11ac40, High Channel(30MHz~5.2GHz)

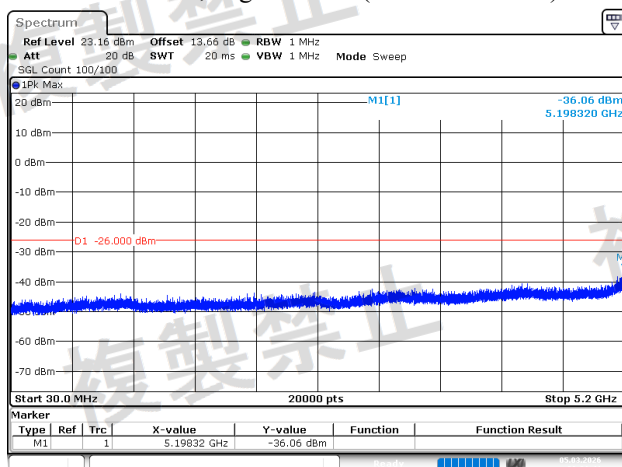


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:21:41

## 802.11ac40, High Channel(5.4GHz~26GHz)

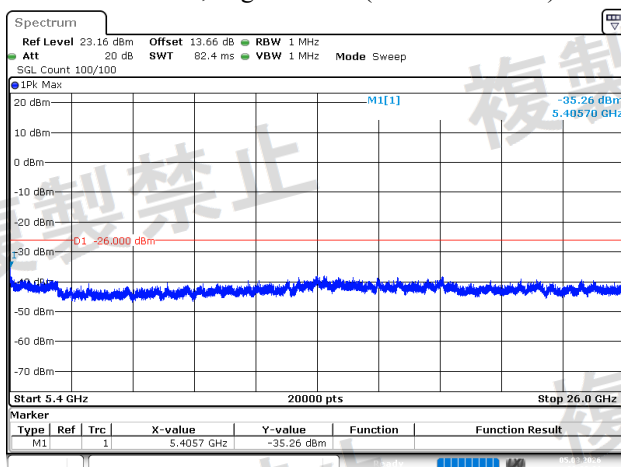


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:22:22

## 802.11ac40, High Channel(5.2GHz~5.4GHz)

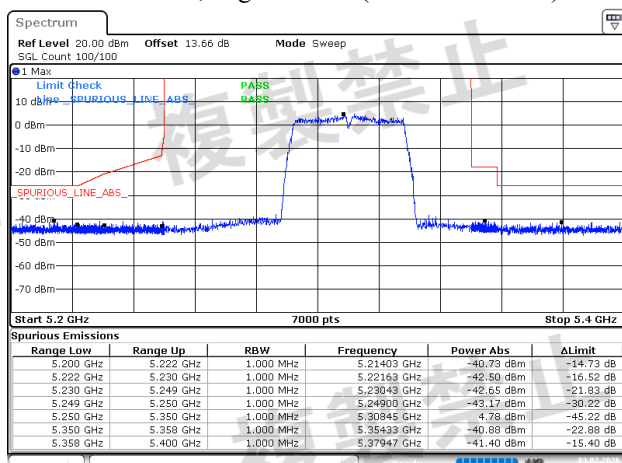


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 23:17:56

## 802.11ac80, Middle Channel(30MHz~5.2GHz)

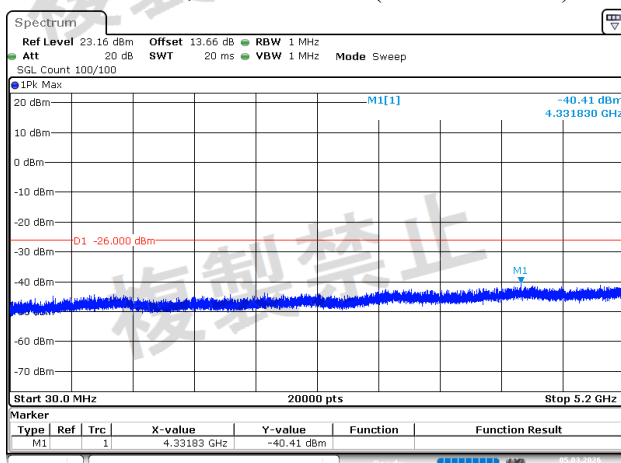


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 05:45:46

## 802.11ac80, Middle Channel(5.4GHz~26GHz)

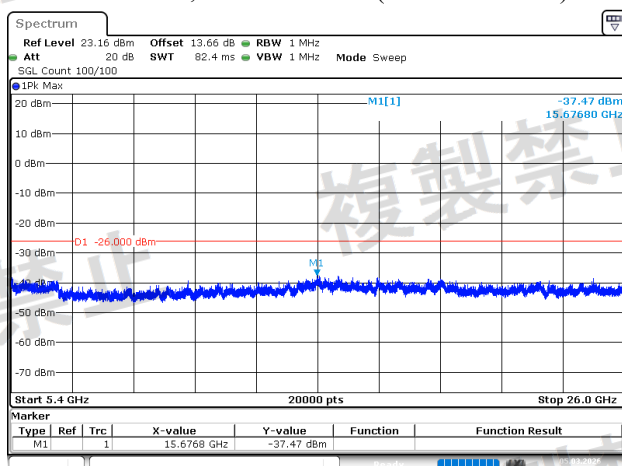


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 05:46:25

## 802.11ac80, Middle Channel(5.2GHz~5.4GHz)

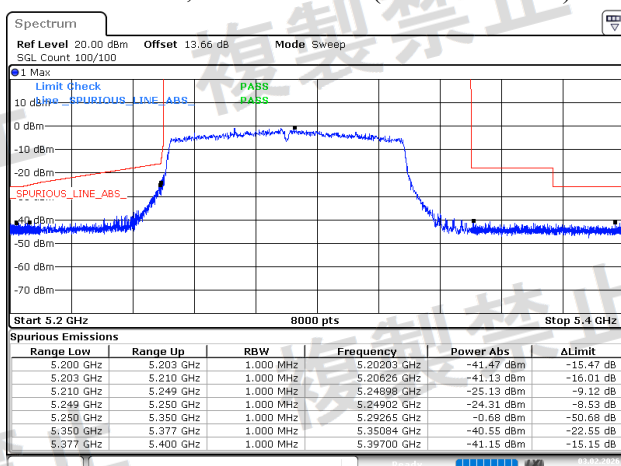


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 23:52:41

## 802.11ax20, Low Channel(30MHz~5.2GHz)

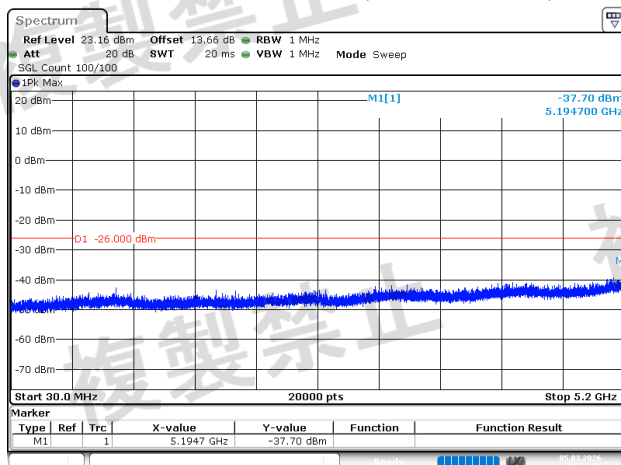


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 07:04:50

## 802.11ax20, Low Channel(5.4GHz~26GHz)

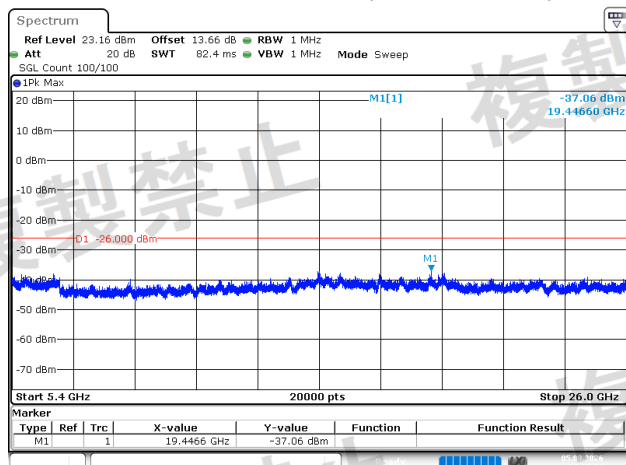


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 07:05:31

## 802.11ax20, Low Channel(5.2GHz~5.4GHz)

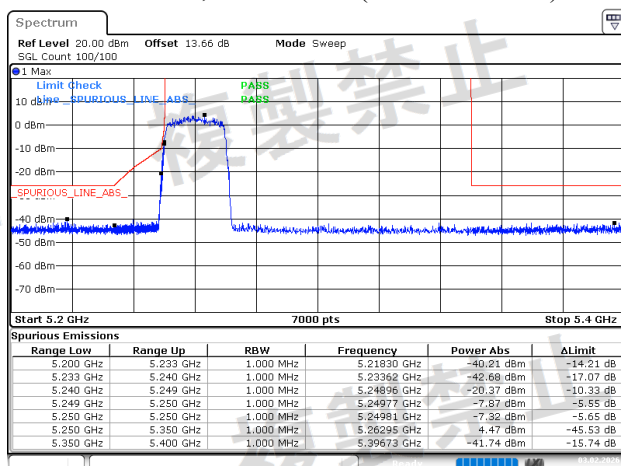


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 21:45:30

## 802.11ax20, Middle Channel(30MHz~5.2GHz)

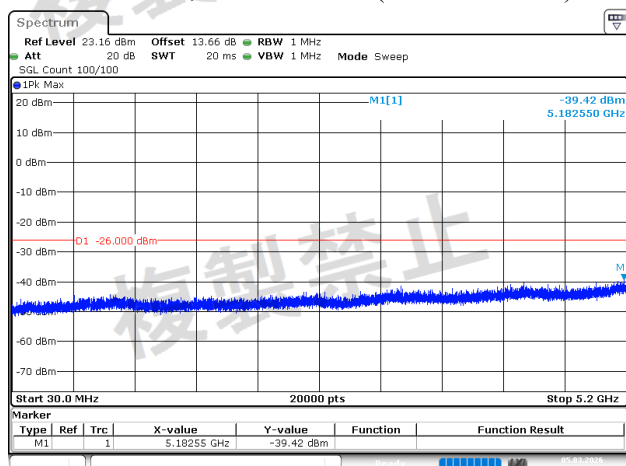


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 07:06:54

## 802.11ax20, Middle Channel(5.4GHz~26GHz)

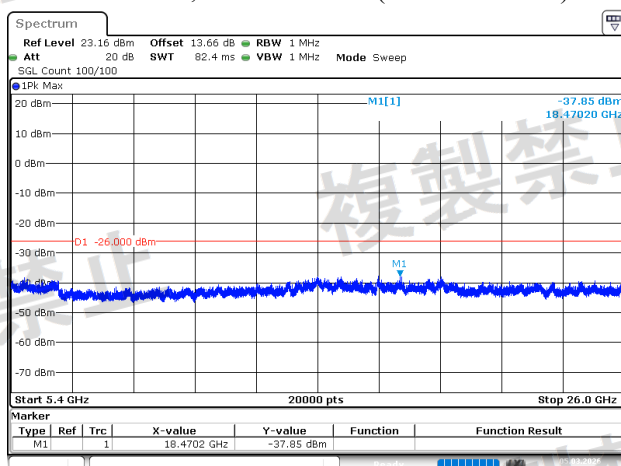


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 07:07:34

## 802.11ax20, Middle Channel(5.2GHz~5.4GHz)

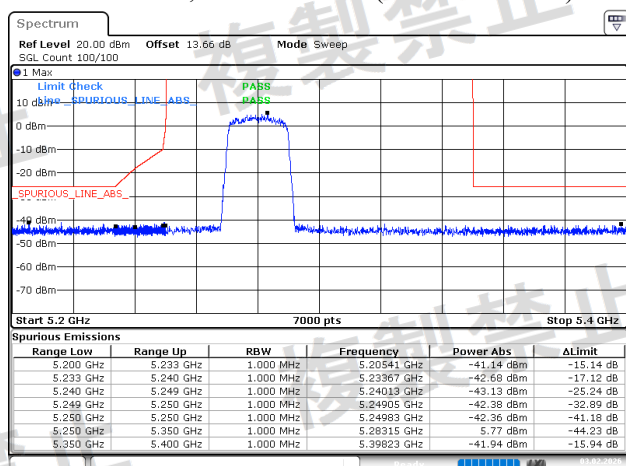

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 21:47:30


## 802.11ax20, High Channel(30MHz~5.2GHz)

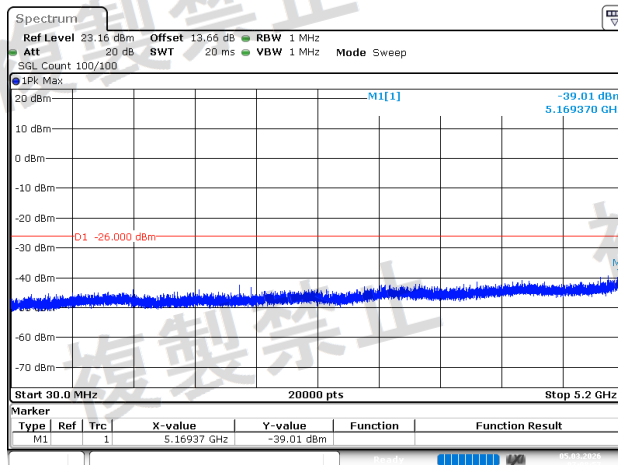

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang

Date: 5.MAR.2026 07:08:57


## 802.11ax20, High Channel(5.4GHz~26GHz)

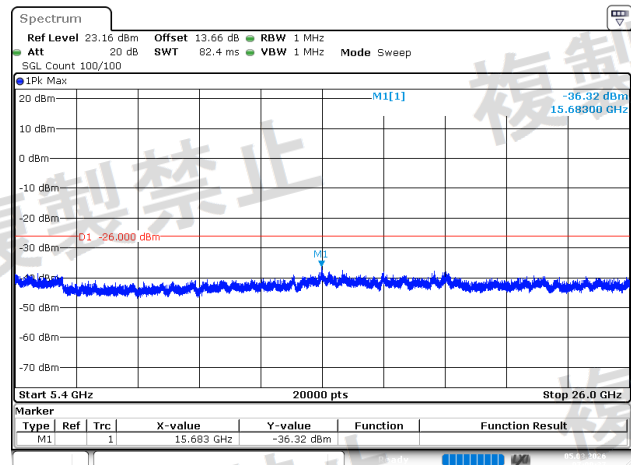

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang

Date: 5.MAR.2026 07:09:38


## 802.11ax20, High Channel(5.2GHz~5.4GHz)

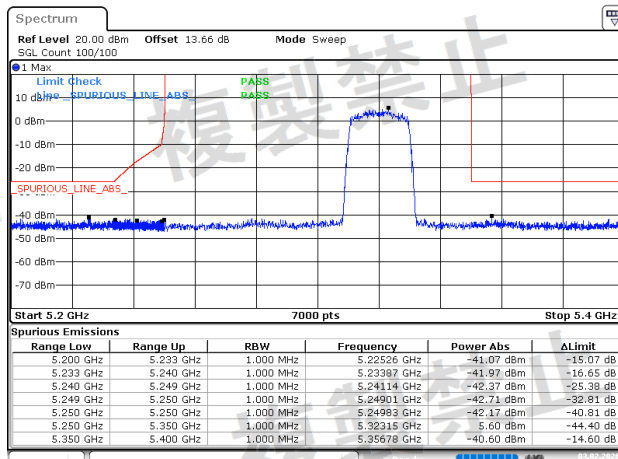

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang

Date: 3.FEB.2026 21:49:31


## 802.11ax40, Low Channel(30MHz~5.2GHz)

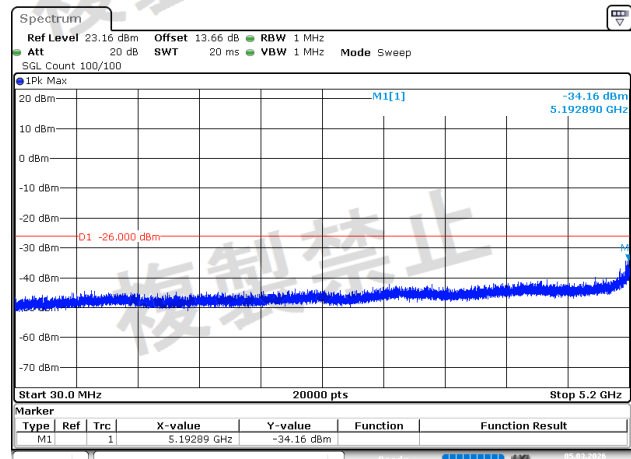

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang

Date: 5.MAR.2026 06:15:18


## 802.11ax40, Low Channel(5.4GHz~26GHz)

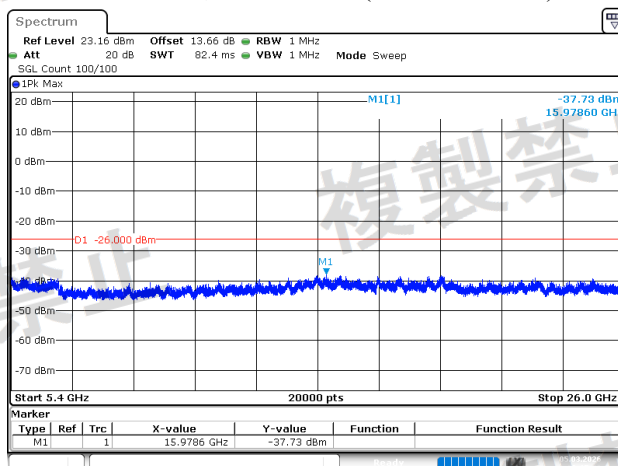

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang

Date: 5.MAR.2026 06:15:59


## 802.11ax40, Low Channel(5.2GHz~5.4GHz)

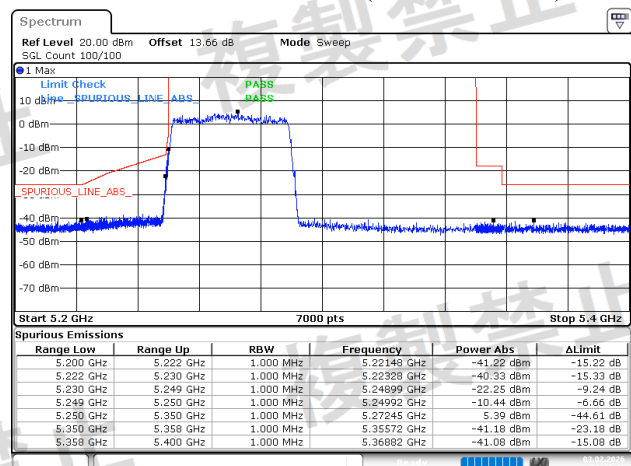

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang


Date: 3.FEB.2026 20:41:48

## 802.11ax40, High Channel(30MHz~5.2GHz)

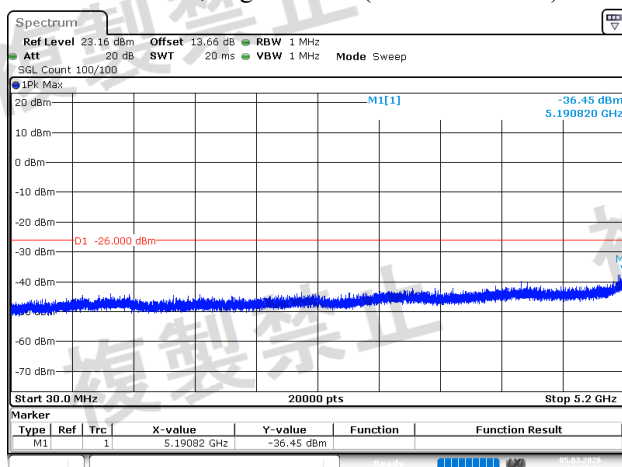


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:17:26

## 802.11ax40, High Channel(5.4GHz~26GHz)

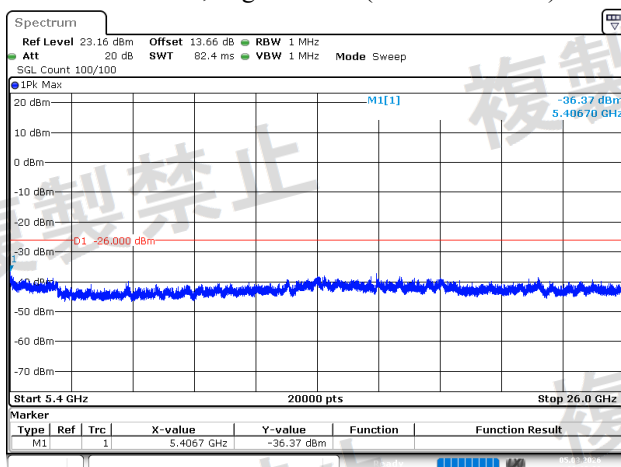


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 06:18:06

## 802.11ax40, High Channel(5.2GHz~5.4GHz)

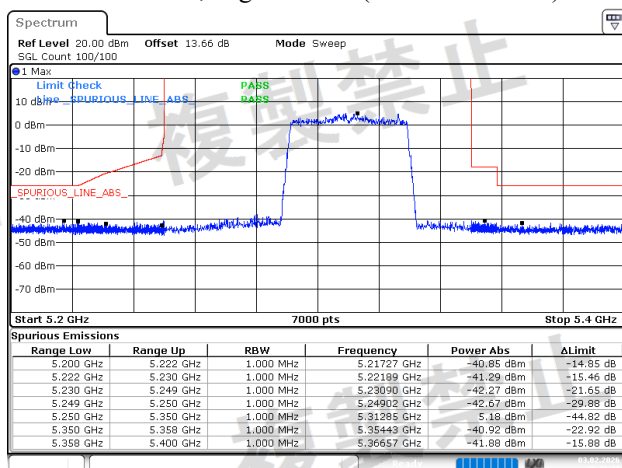


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 20:43:38

## 802.11ax80, Middle Channel(30MHz~5.2GHz)

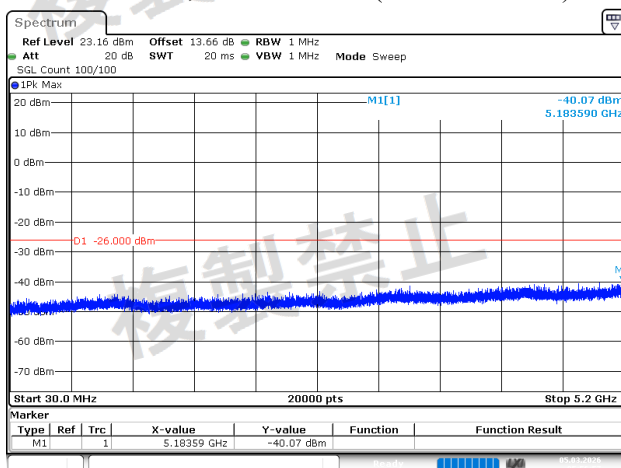


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 05:56:57

## 802.11ax80, Middle Channel(5.4GHz~26GHz)

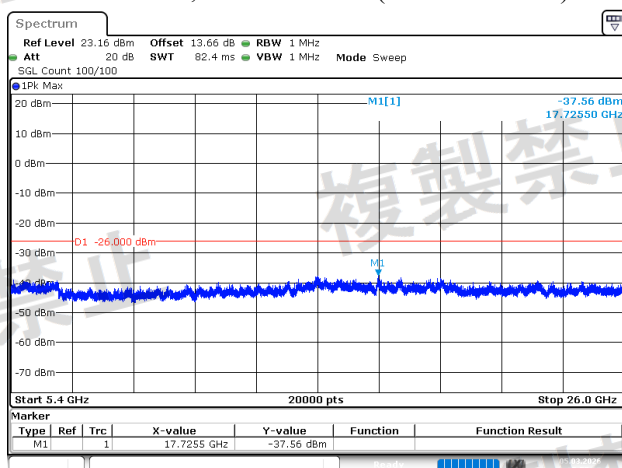

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 05:57:37


## 802.11ax80, Middle Channel(5.2GHz~5.4GHz)

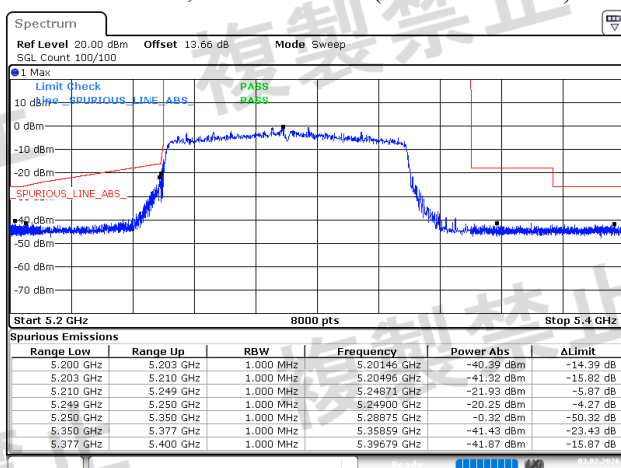


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 3.FEB.2026 23:59:09

## W53, Chain 0+Chain 1, Test Condition: NV


802.11ac20, Low Channel(5.2GHz~5.4GHz)

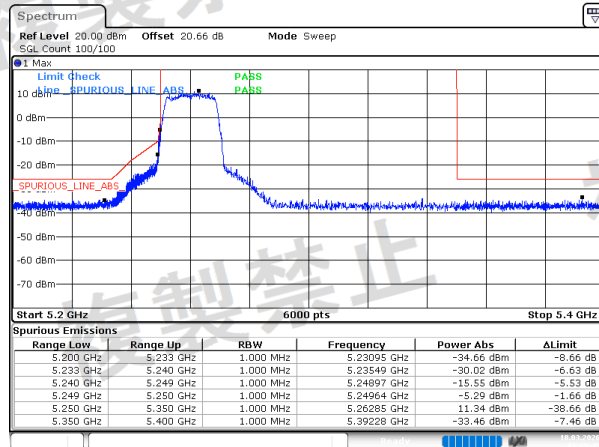ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 03:28:45


802.11ac20, Middle Channel(5.2GHz~5.4GHz)

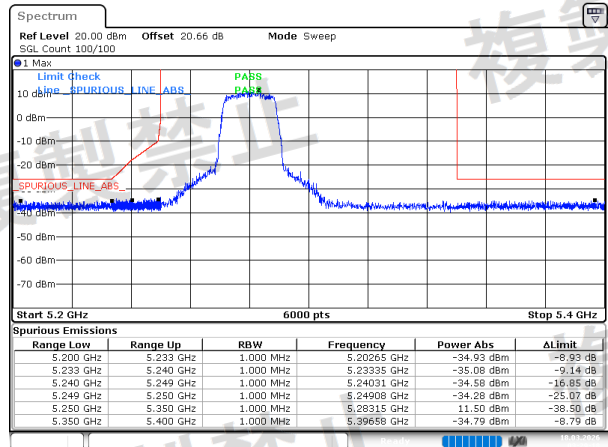ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 03:29:10


802.11ac20, High Channel(5.2GHz~5.4GHz)

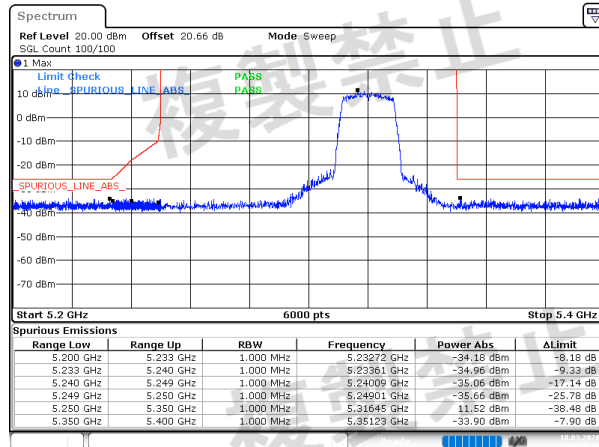ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 03:29:48


802.11ac40, Low Channel(5.2GHz~5.4GHz)

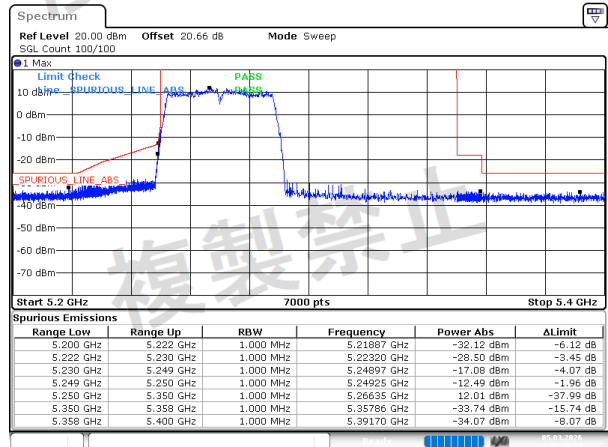ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 05:30:39


802.11ac40, High Channel(5.2GHz~5.4GHz)

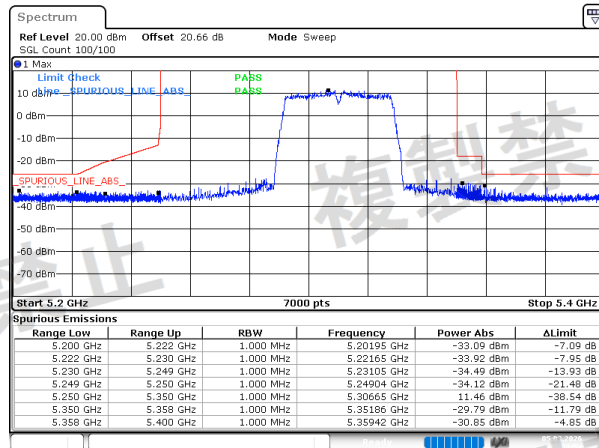ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 05:31:54

802.11ac80, Middle Channel(5.2GHz~5.4GHz)

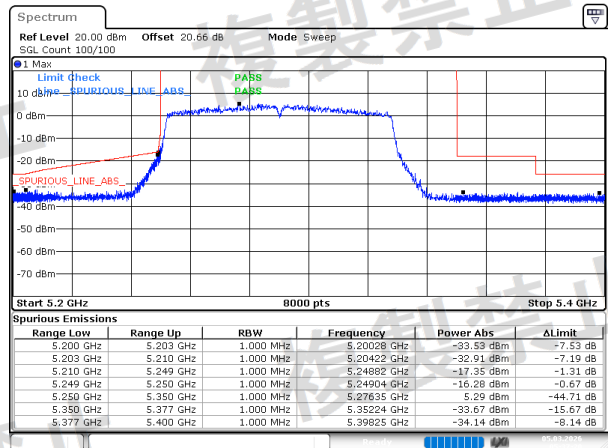
ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 05:37:20

## 802.11ax20, Low Channel(5.2GHz~5.4GHz)

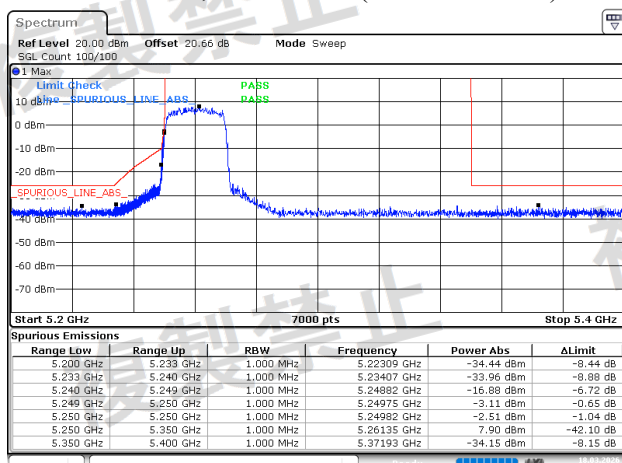


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 18.MAR.2026 03:06:20

## 802.11ax20, Middle Channel(5.2GHz~5.4GHz)

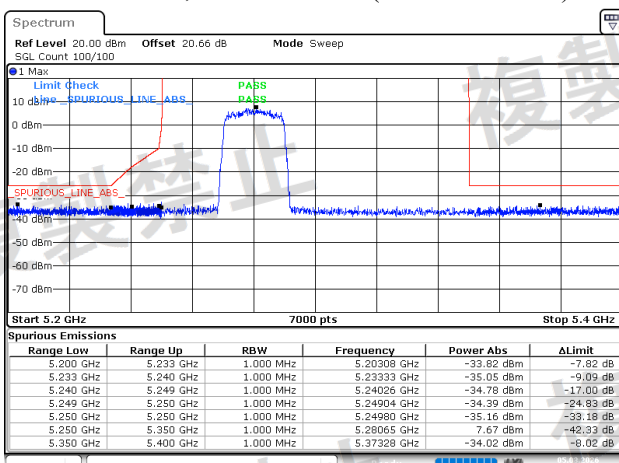


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 04:51:56

## 802.11ax20, High Channel(5.2GHz~5.4GHz)

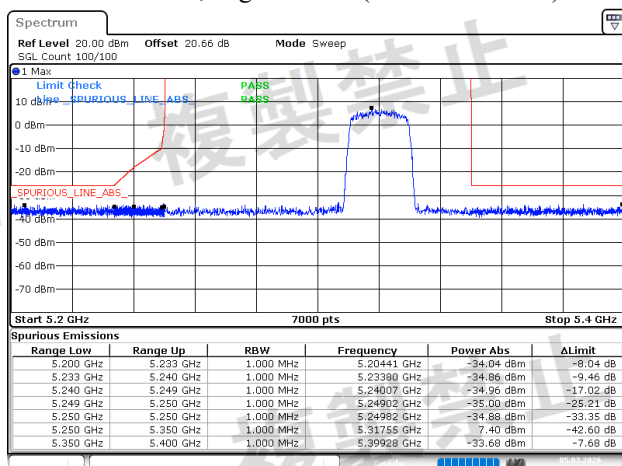


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 04:53:04

## 802.11ax40, Low Channel(5.2GHz~5.4GHz)

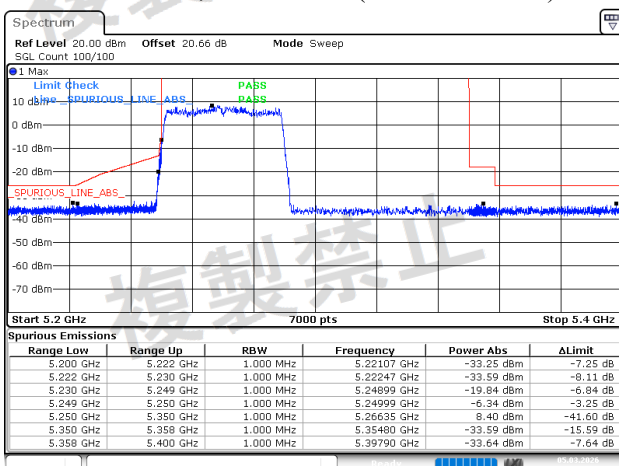


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 05:06:49

## 802.11ax40, High Channel(5.2GHz~5.4GHz)

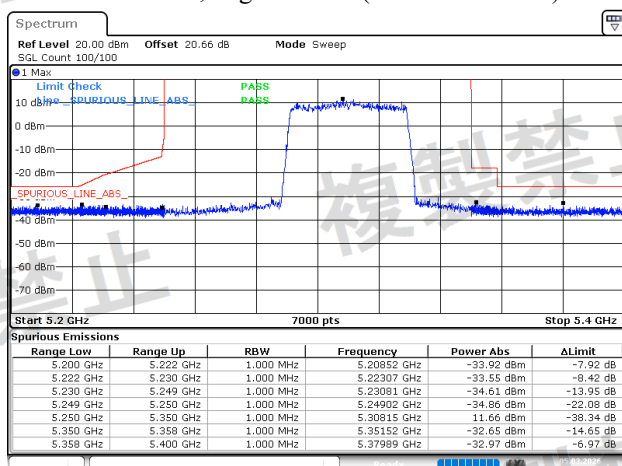

ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 05:13:57


## 802.11ax80, Middle Channel(5.2GHz~5.4GHz)

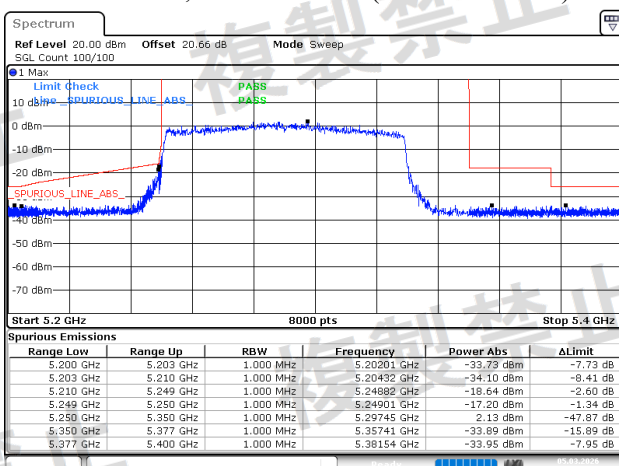


ProjectNo.:2601P37306E-RF Tester:Cheeb Huang  
Date: 5.MAR.2026 04:55:51

## W56, Chain 0, Test Condition: NV


## 802.11a, Low Channel(30MHz~5.3GHz)

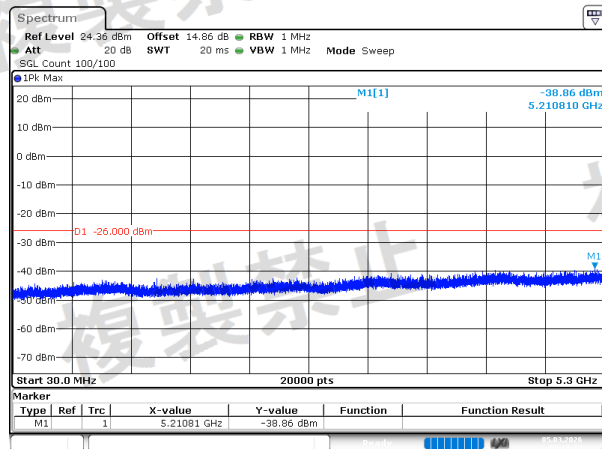


## 802.11a, Low Channel(5.9GHz~26GHz)

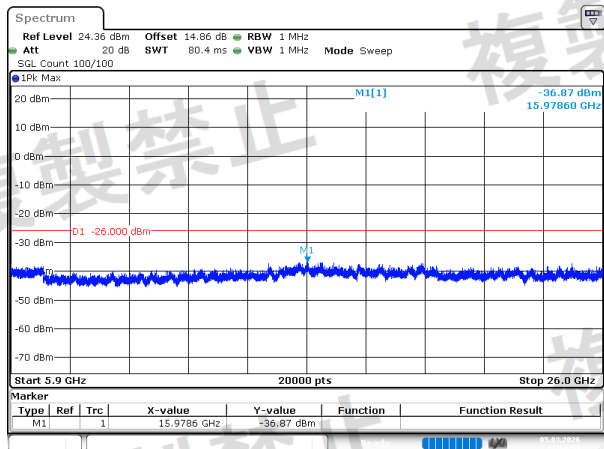


## 802.11a, Low Channel(5.3GHz~5.9GHz)

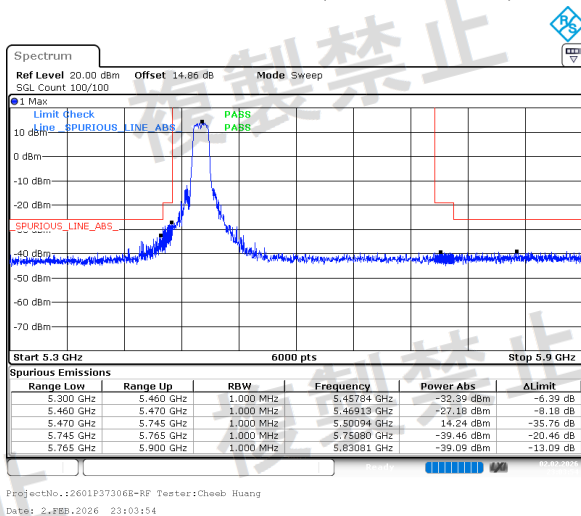

## 802.11a, Middle Channel(30MHz~5.3GHz)

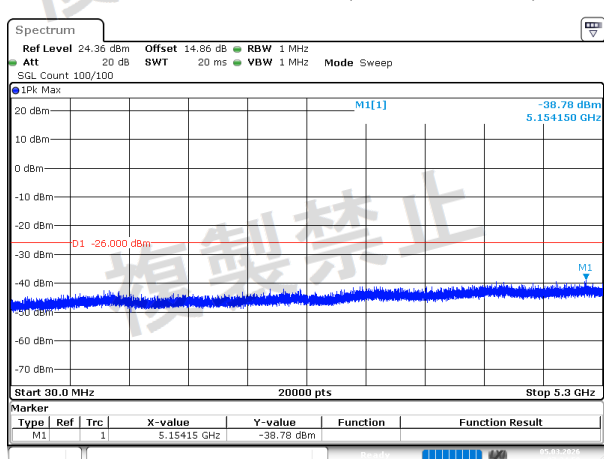

## 802.11a, Middle Channel(5.9GHz~26GHz)

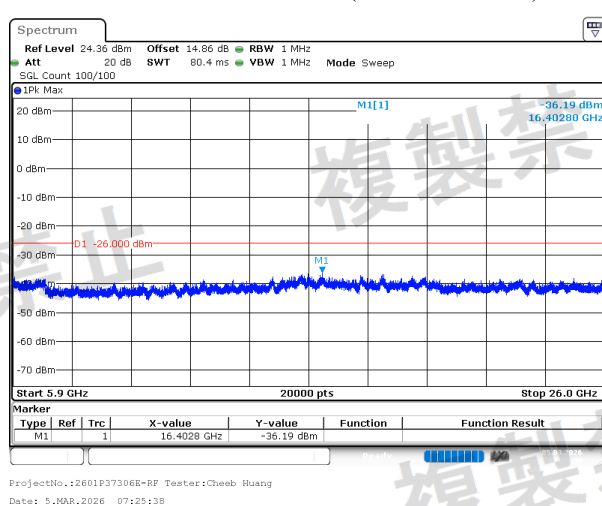

## 802.11a, Middle Channel(5.3GHz~5.9GHz)

