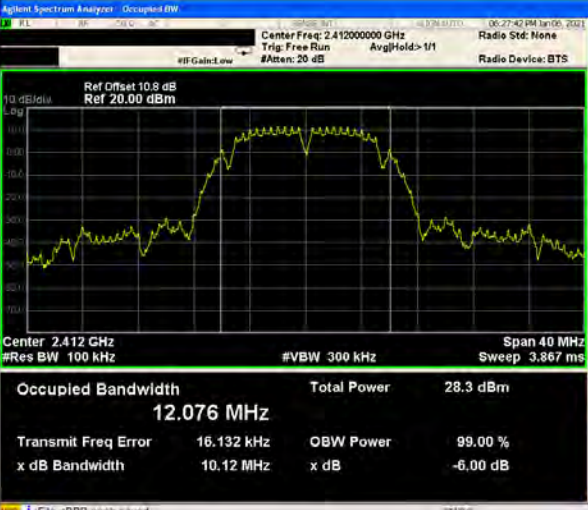
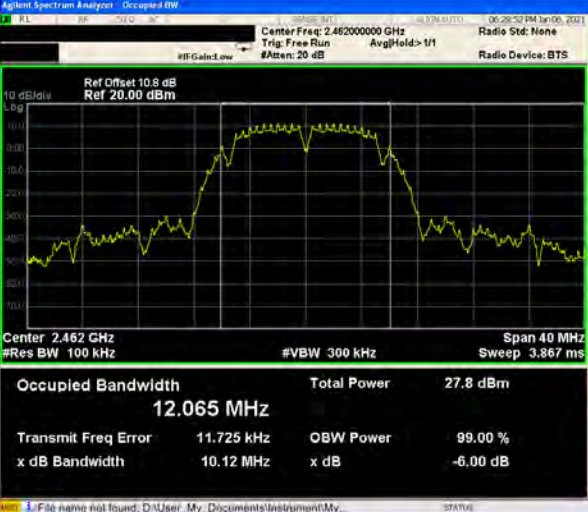
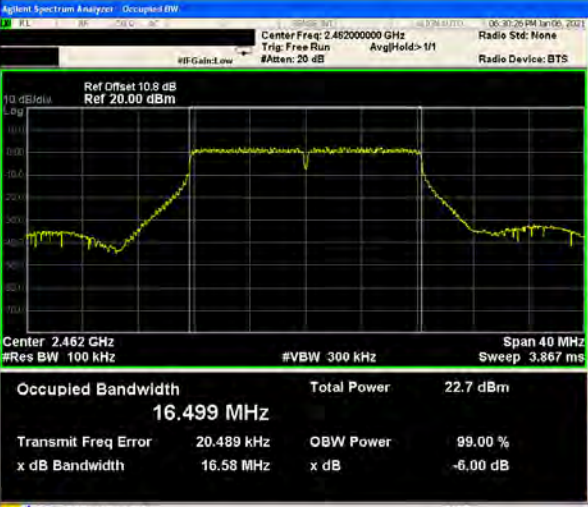





6 dB Bandwidth



Test Mode	Frequency (MHz)	Measurement (kHz)				Limit (kHz)
		ANT-0	ANT-1	ANT-2	ANT-3	
Mode 2	2412	10120	---	---	---	≥ 500
	2437	10110	---	---	---	≥ 500
	2462	10120	---	---	---	≥ 500
Mode 3	2412	16610	---	---	---	≥ 500
	2437	16590	---	---	---	≥ 500
	2462	16580	---	---	---	≥ 500
Mode 6	2412	17780	17770	17780	17760	≥ 500
	2437	17750	17770	17740	17740	≥ 500
	2462	17790	17770	17770	17780	≥ 500
Mode 7	2422	36430	36420	36400	36390	≥ 500
	2437	36400	36430	36410	36420	≥ 500
	2452	36410	36420	36410	36410	≥ 500
Mode 8	2412	19100	19100	19080	19110	≥ 500
	2437	19100	19100	19100	19100	≥ 500
	2462	19110	19100	19100	19090	≥ 500
Mode 9	2422	38180	38170	38210	38190	≥ 500
	2437	38190	38190	38180	38180	≥ 500
	2452	38180	38190	38120	38170	≥ 500




Mode 2: IEEE 802.11b Continuous TX mode_ANT-0		
2412 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.41200000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 12.076 MHz Total Power 28.3 dBm Transmit Freq Error 16.132 kHz OBW Power 99.00 % x dB Bandwidth 10.12 MHz x dB -6.00 dB Frequency Center Freq 2.41200000 GHz CF Step 4.000000 MHz Freq Offset 0 Hz
2437 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 12.067 MHz Total Power 28.7 dBm Transmit Freq Error 14.656 kHz OBW Power 99.00 % x dB Bandwidth 10.11 MHz x dB -6.00 dB Frequency Center Freq 2.43700000 GHz CF Step 4.000000 MHz Freq Offset 0 Hz
2462 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.46200000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 12.065 MHz Total Power 27.8 dBm Transmit Freq Error 11.725 kHz OBW Power 99.00 % x dB Bandwidth 10.12 MHz x dB -6.00 dB Frequency Center Freq 2.46200000 GHz CF Step 4.000000 MHz Freq Offset 0 Hz


Mode 3: IEEE 802.11g Continuous TX mode_ANT-0		
2412 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.41200000 GHz Trig: Free Run #Absen: 20 dB Avg(Hold): 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 16.503 MHz Total Power 21.6 dBm Transmit Freq Error 17.934 kHz OBW Power 99.00 % x dB Bandwidth 16.61 MHz x dB -6.00 dB Frequency Center Freq 2.41200000 GHz CF Step 4.000000 MHz Freq Offset 0 Hz
2437 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Trig: Free Run #Absen: 20 dB Avg(Hold): 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 16.495 MHz Total Power 21.0 dBm Transmit Freq Error 17.462 kHz OBW Power 99.00 % x dB Bandwidth 16.59 MHz x dB -6.00 dB Frequency Center Freq 2.43700000 GHz CF Step 4.000000 MHz Freq Offset 0 Hz
2462 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.46200000 GHz Trig: Free Run #Absen: 20 dB Avg(Hold): 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 16.499 MHz Total Power 22.7 dBm Transmit Freq Error 20.489 kHz OBW Power 99.00 % x dB Bandwidth 16.58 MHz x dB -6.00 dB Frequency Center Freq 2.46200000 GHz CF Step 4.000000 MHz Freq Offset 0 Hz




Mode 6: IEEE 802.11n 2.4 GHz 20 MHz(256QAM) Continuous TX Mode_ANT-0		
2412 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.41200000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 17.724 MHz Total Power 18.0 dBm Transmit Freq Error 20.796 kHz OBW Power 99.00 % x dB Bandwidth 17.78 MHz x dB -6.00 dB File name not found: D:\User_My_Documents\Instrument\My...
2437 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 17.718 MHz Total Power 16.8 dBm Transmit Freq Error 12.332 kHz OBW Power 99.00 % x dB Bandwidth 17.75 MHz x dB -6.00 dB File <BBB.png> saved
2462 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.46200000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 17.717 MHz Total Power 16.6 dBm Transmit Freq Error 13.831 kHz OBW Power 99.00 % x dB Bandwidth 17.79 MHz x dB -6.00 dB File <BBB.png> saved

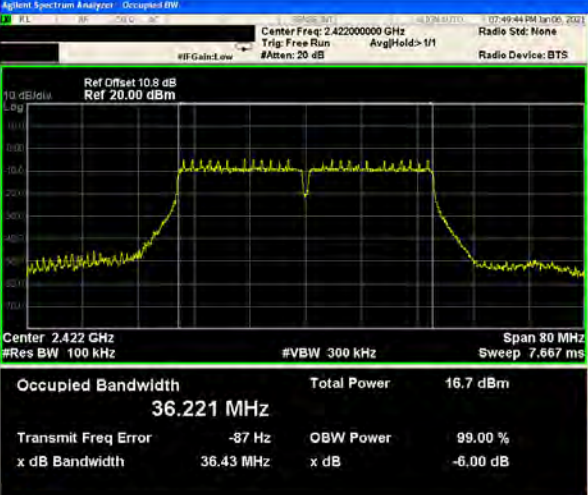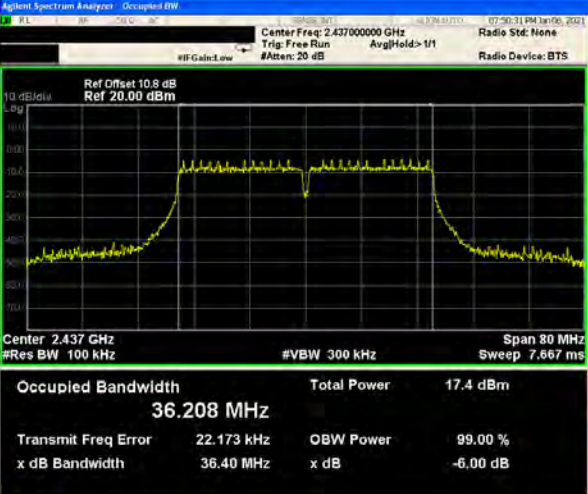
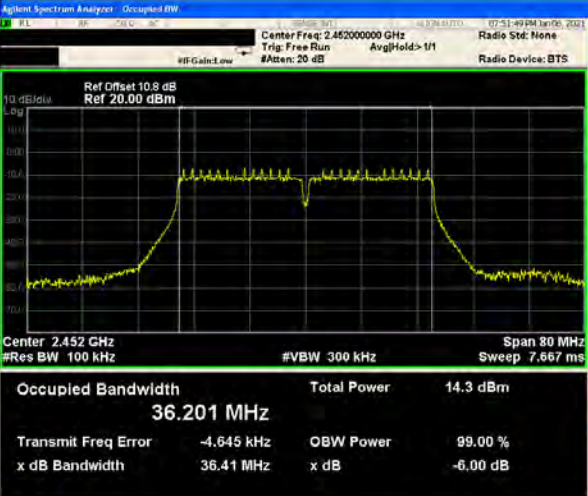
Mode 7: IEEE 802.11n 2.4 GHz 40 MHz(256QAM) Continuous TX Mode_ANT-0		
2422 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.42200000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 7.667 ms Occupied Bandwidth 36.221 MHz Total Power 16.7 dBm Transmit Freq Error -87 Hz OBW Power 99.00 % x dB Bandwidth 36.43 MHz x dB -6.00 dB File name not found: D:\User_My_Documents\Instrument\My_...
2437 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 7.667 ms Occupied Bandwidth 36.208 MHz Total Power 17.4 dBm Transmit Freq Error 22.173 kHz OBW Power 99.00 % x dB Bandwidth 36.40 MHz x dB -6.00 dB File name not found: D:\User_My_Documents\Instrument\My_...
2452 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.45200000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 7.667 ms Occupied Bandwidth 36.201 MHz Total Power 14.3 dBm Transmit Freq Error -4.645 kHz OBW Power 99.00 % x dB Bandwidth 36.41 MHz x dB -6.00 dB File <BBB.png> saved

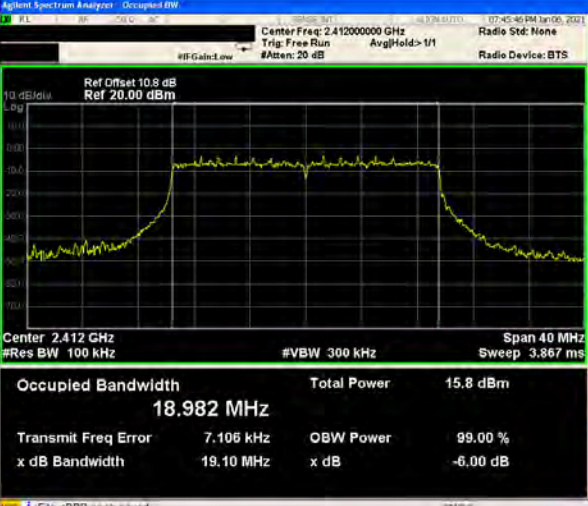
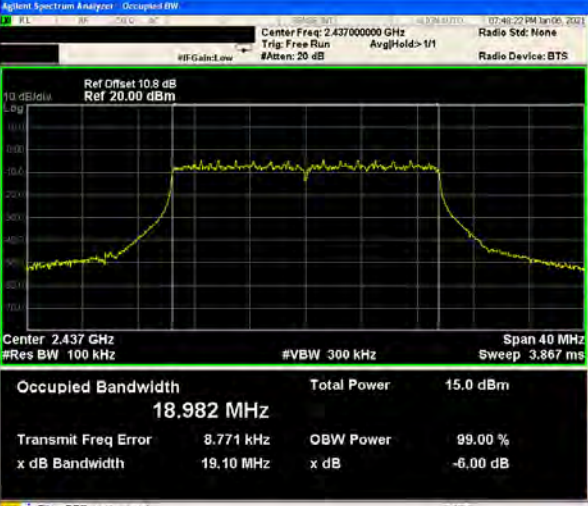
Mode 8: IEEE 802.11ax 2.4 GHz 20 MHz Continuous TX Mode_ANT-0		
2412 MHz		Frequency Center Freq 2.41200000 GHz CF Step 4.000000 MHz Freq Offset 0 Hz
2437 MHz		Frequency Center Freq 2.43700000 GHz CF Step 4.000000 MHz Freq Offset 0 Hz
2462 MHz		Frequency Center Freq 2.46200000 GHz CF Step 4.000000 MHz Freq Offset 0 Hz

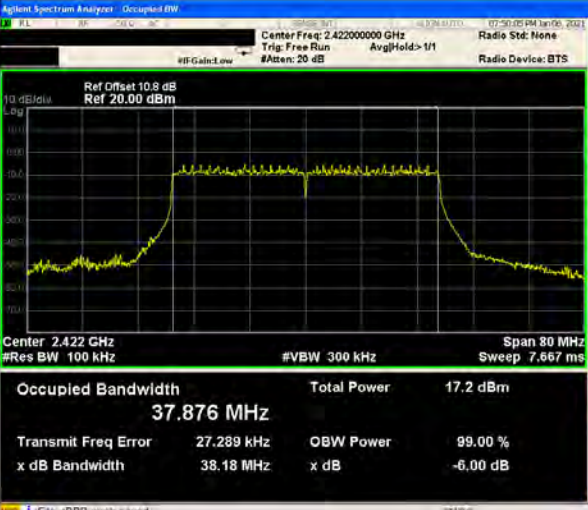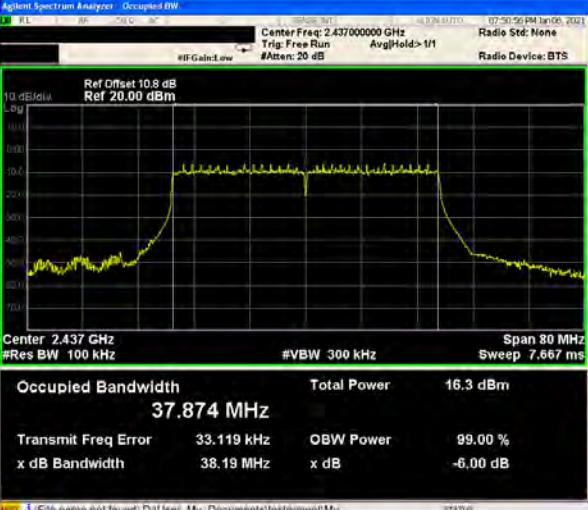
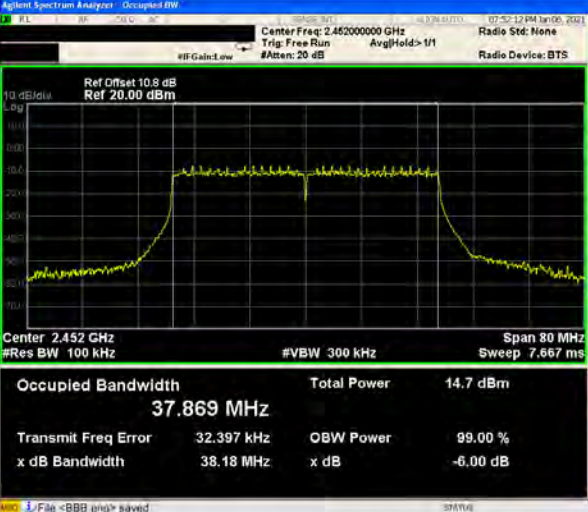
Mode 9: IEEE 802.11ax 2.4 GHz 40 MHz Continuous TX Mode_ANT-0		
2422 MHz		Frequency Center Freq 2.42200000 GHz CF Step 9.000000 MHz Freq Offset 0 Hz
2437 MHz		Frequency Center Freq 2.43700000 GHz CF Step 9.000000 MHz Freq Offset 0 Hz
2452 MHz		Frequency Center Freq 2.45200000 GHz CF Step 9.000000 MHz Freq Offset 0 Hz



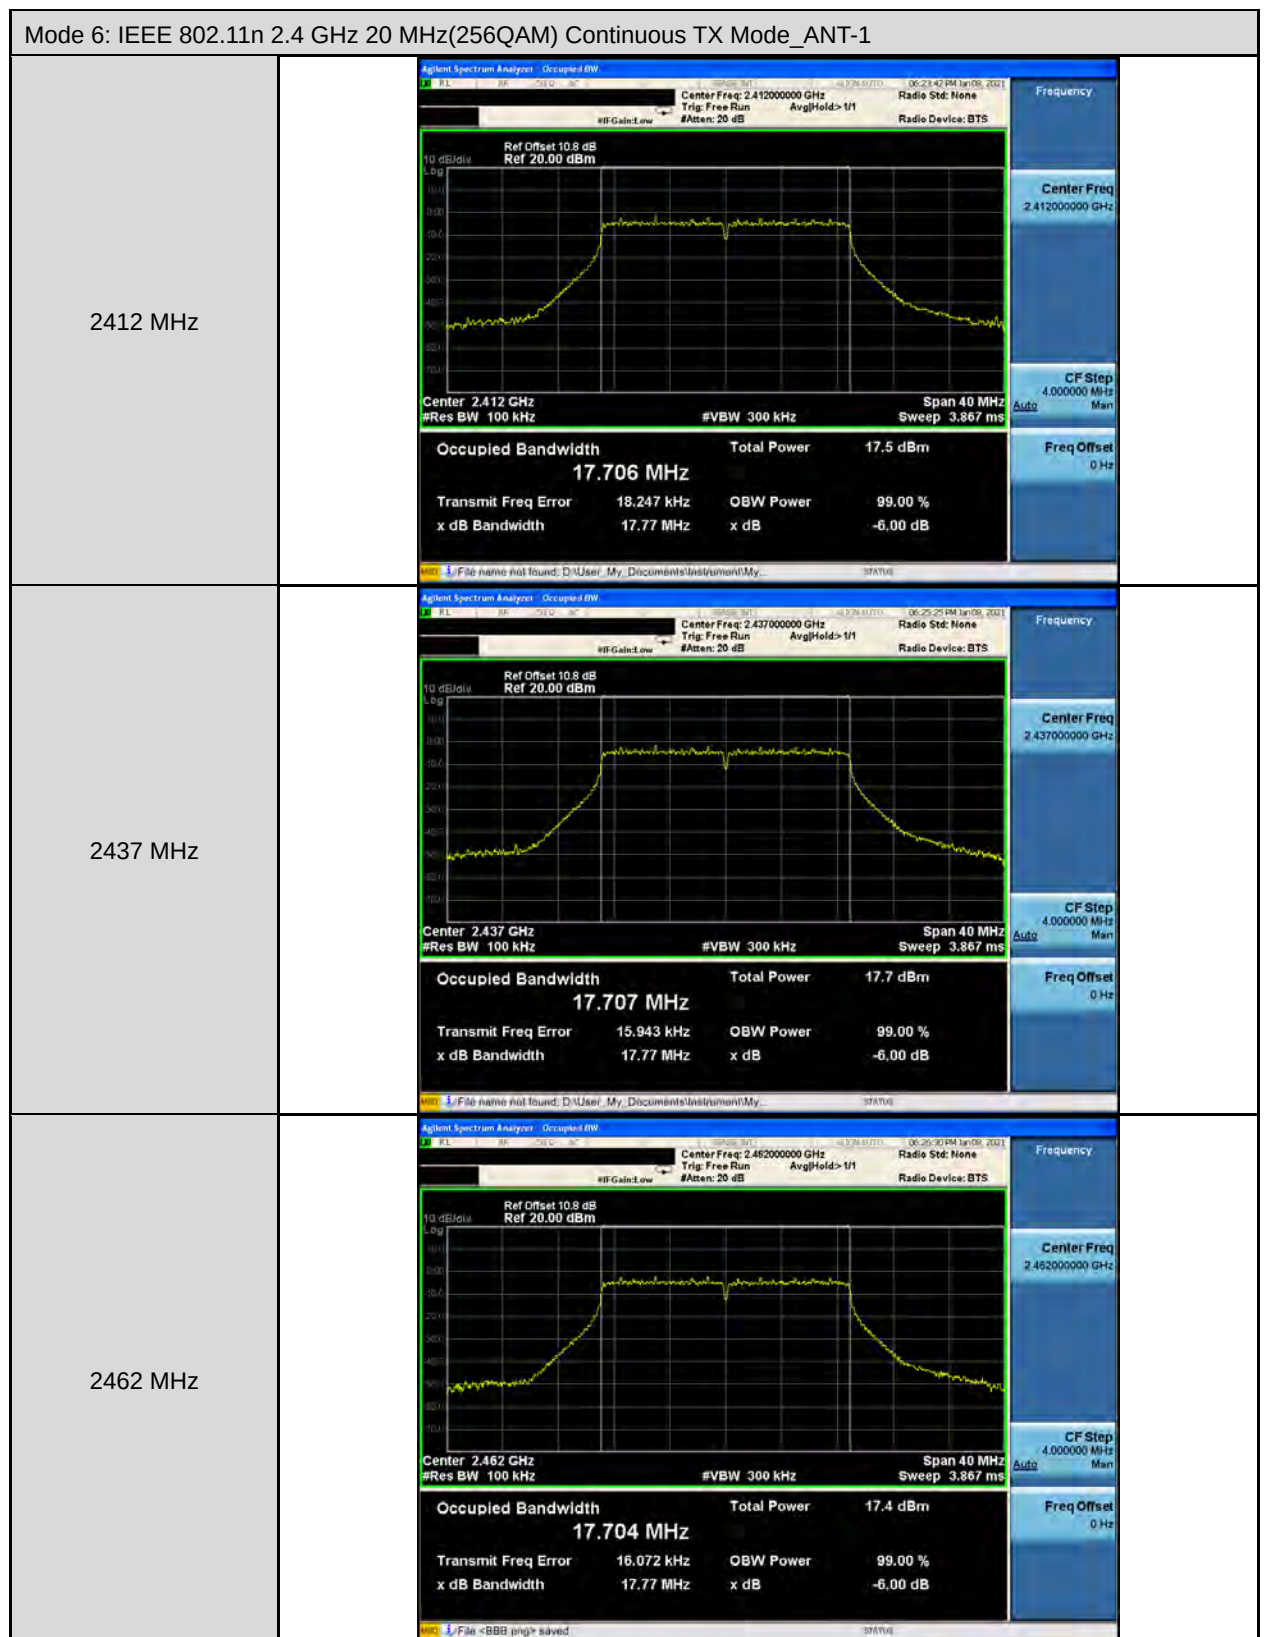


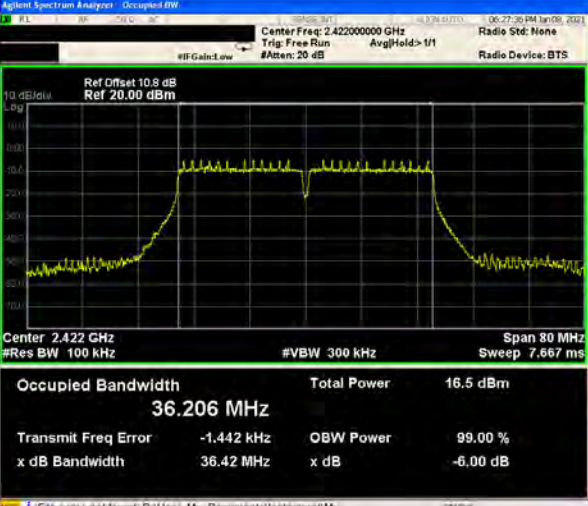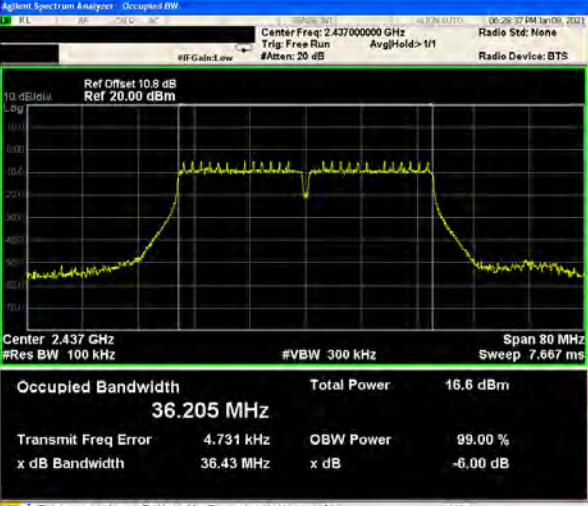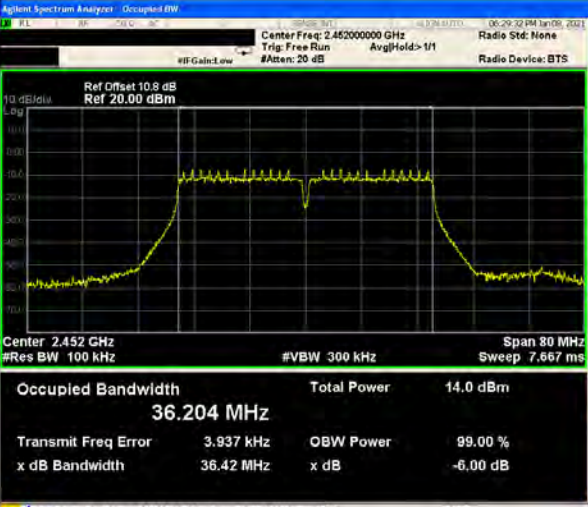Mode 7: IEEE 802.11n 2.4 GHz 40 MHz(256QAM) Continuous TX Mode_ANT-1		
2422 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.42200000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 36.206 MHz Total Power 16.5 dBm Transmit Freq Error -1.442 kHz OBW Power 99.00 % x dB Bandwidth 36.42 MHz x dB -6.00 dB File name not found: D:\User_My_Documents\instrument\My_... STATUS
2437 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 36.205 MHz Total Power 16.6 dBm Transmit Freq Error 4.731 kHz OBW Power 99.00 % x dB Bandwidth 36.43 MHz x dB -6.00 dB File name not found: D:\User_My_Documents\instrument\My_... STATUS
2452 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.45200000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 36.204 MHz Total Power 14.0 dBm Transmit Freq Error 3.937 kHz OBW Power 99.00 % x dB Bandwidth 36.42 MHz x dB -6.00 dB File name not found: D:\User_My_Documents\instrument\My_... STATUS

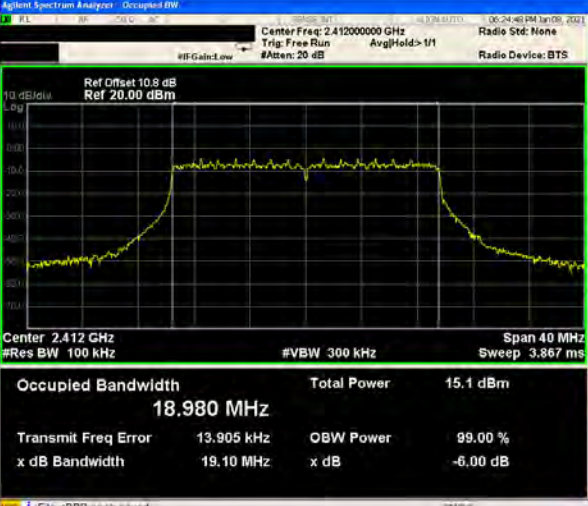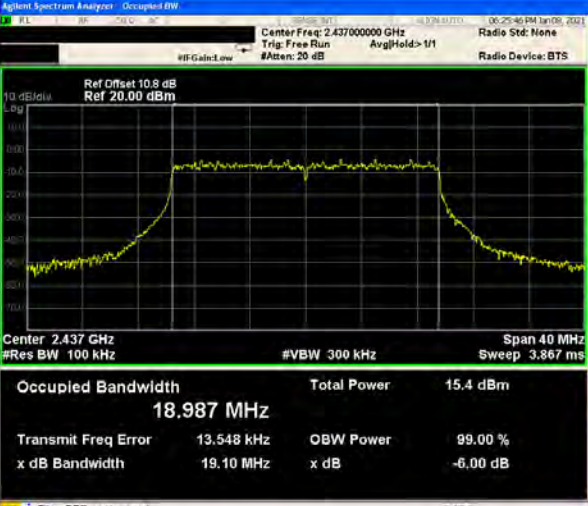
Mode 8: IEEE 802.11ax 2.4 GHz 20 MHz Continuous TX Mode_ANT-1		
2412 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.41200000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 18.980 MHz Total Power 15.1 dBm Transmit Freq Error 13.905 kHz OBW Power 99.00 % x dB Bandwidth 19.10 MHz x dB -6.00 dB File <BBB.png> saved
2437 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 18.987 MHz Total Power 15.4 dBm Transmit Freq Error 13.548 kHz OBW Power 99.00 % x dB Bandwidth 19.10 MHz x dB -6.00 dB File <BBB.png> saved
2462 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.46200000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 18.983 MHz Total Power 15.5 dBm Transmit Freq Error 11.779 kHz OBW Power 99.00 % x dB Bandwidth 19.10 MHz x dB -6.00 dB File <BBB.png> saved


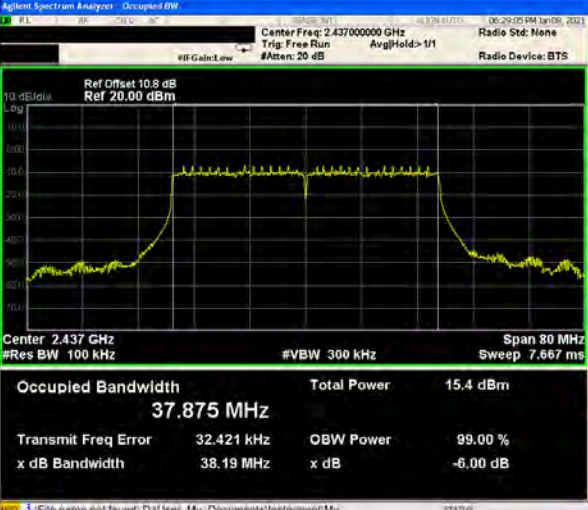
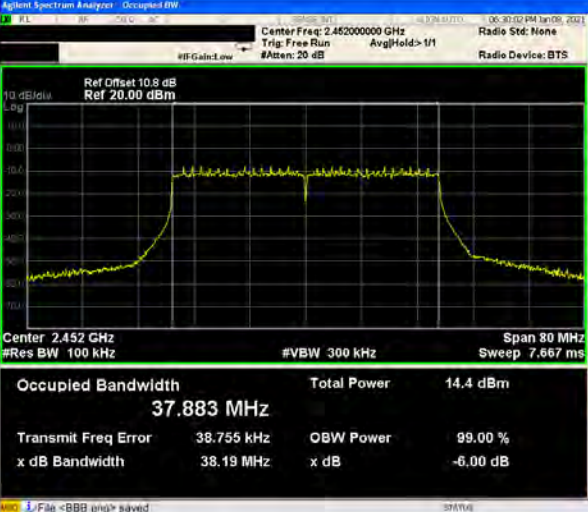
Mode 9: IEEE 802.11ax 2.4 GHz 40 MHz Continuous TX Mode_ANT-1		
2422 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.42200000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 7.667 ms Occupied Bandwidth 37.868 MHz Total Power 16.9 dBm Transmit Freq Error 30.697 kHz OBW Power 99.00 % x dB Bandwidth 38.17 MHz x dB -6.00 dB File name not found: D:\User_My_Documents\instrument\My...
2437 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 7.667 ms Occupied Bandwidth 37.875 MHz Total Power 15.4 dBm Transmit Freq Error 32.421 kHz OBW Power 99.00 % x dB Bandwidth 38.19 MHz x dB -6.00 dB File name not found: D:\User_My_Documents\instrument\My...
2452 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.45200000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 7.667 ms Occupied Bandwidth 37.883 MHz Total Power 14.4 dBm Transmit Freq Error 38.755 kHz OBW Power 99.00 % x dB Bandwidth 38.19 MHz x dB -6.00 dB File <BBB.png> saved

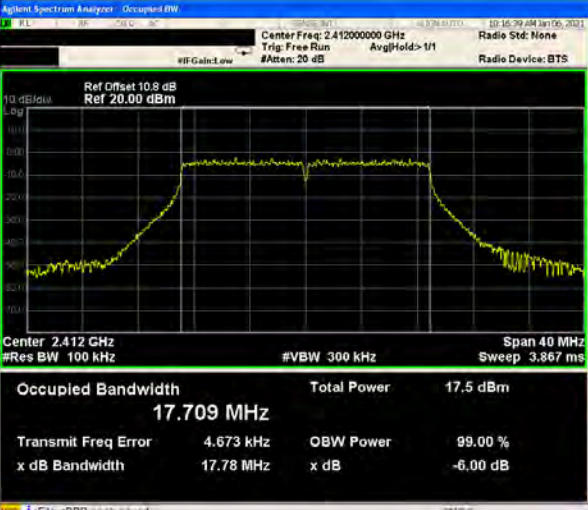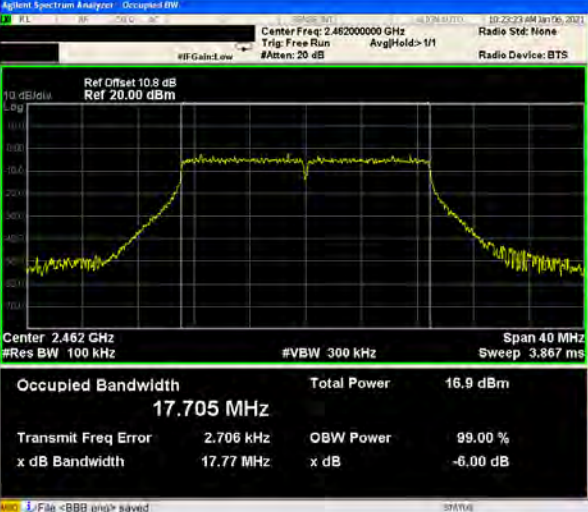
Mode 6: IEEE 802.11n 2.4 GHz 20 MHz(256QAM) Continuous TX Mode_ANT-2		
2412 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.41200000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 17.709 MHz Total Power 17.5 dBm Transmit Freq Error 4.673 kHz OBW Power 99.00 % x dB Bandwidth 17.78 MHz x dB -6.00 dB File <BBB.png> saved
2437 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 17.711 MHz Total Power 17.4 dBm Transmit Freq Error 3.287 kHz OBW Power 99.00 % x dB Bandwidth 17.74 MHz x dB -6.00 dB File <BBB.png> saved
2462 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.46200000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 17.705 MHz Total Power 16.9 dBm Transmit Freq Error 2.706 kHz OBW Power 99.00 % x dB Bandwidth 17.77 MHz x dB -6.00 dB File <BBB.png> saved

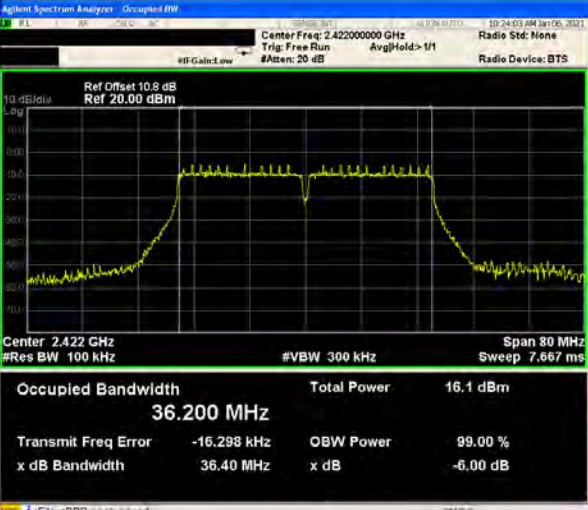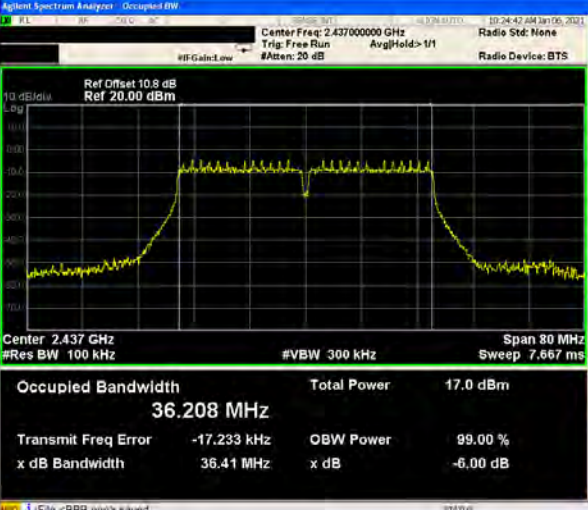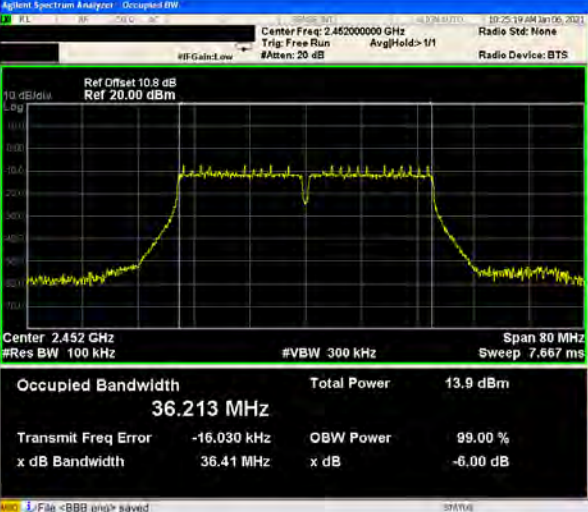Mode 7: IEEE 802.11n 2.4 GHz 40 MHz(256QAM) Continuous TX Mode_ANT-2		
2422 MHz		Frequency Center Freq 2.42200000 GHz CF Step 9.000000 MHz Freq Offset 0 Hz
2437 MHz		Frequency Center Freq 2.43700000 GHz CF Step 9.000000 MHz Freq Offset 0 Hz
2452 MHz		Frequency Center Freq 2.45200000 GHz CF Step 9.000000 MHz Freq Offset 0 Hz



Mode 8: IEEE 802.11ax 2.4 GHz 20 MHz Continuous TX Mode_ANT-2		
2412 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.41200000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 18.983 MHz Total Power 15.4 dBm Transmit Freq Error 13 Hz OBW Power 99.00 % x dB Bandwidth 19.08 MHz x dB -6.00 dB Frequency Center Freq 2.41200000 GHz CF Step 4.000000 MHz Freq Offset 0 Hz
2437 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.437000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 18.982 MHz Total Power 15.3 dBm Transmit Freq Error -6.819 kHz OBW Power 99.00 % x dB Bandwidth 19.10 MHz x dB -6.00 dB Frequency Center Freq 2.437000000 GHz CF Step 4.000000 MHz Freq Offset 0 Hz
2462 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.462000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 18.987 MHz Total Power 15.0 dBm Transmit Freq Error -782 Hz OBW Power 99.00 % x dB Bandwidth 19.10 MHz x dB -6.00 dB Frequency Center Freq 2.462000000 GHz CF Step 4.000000 MHz Freq Offset 0 Hz

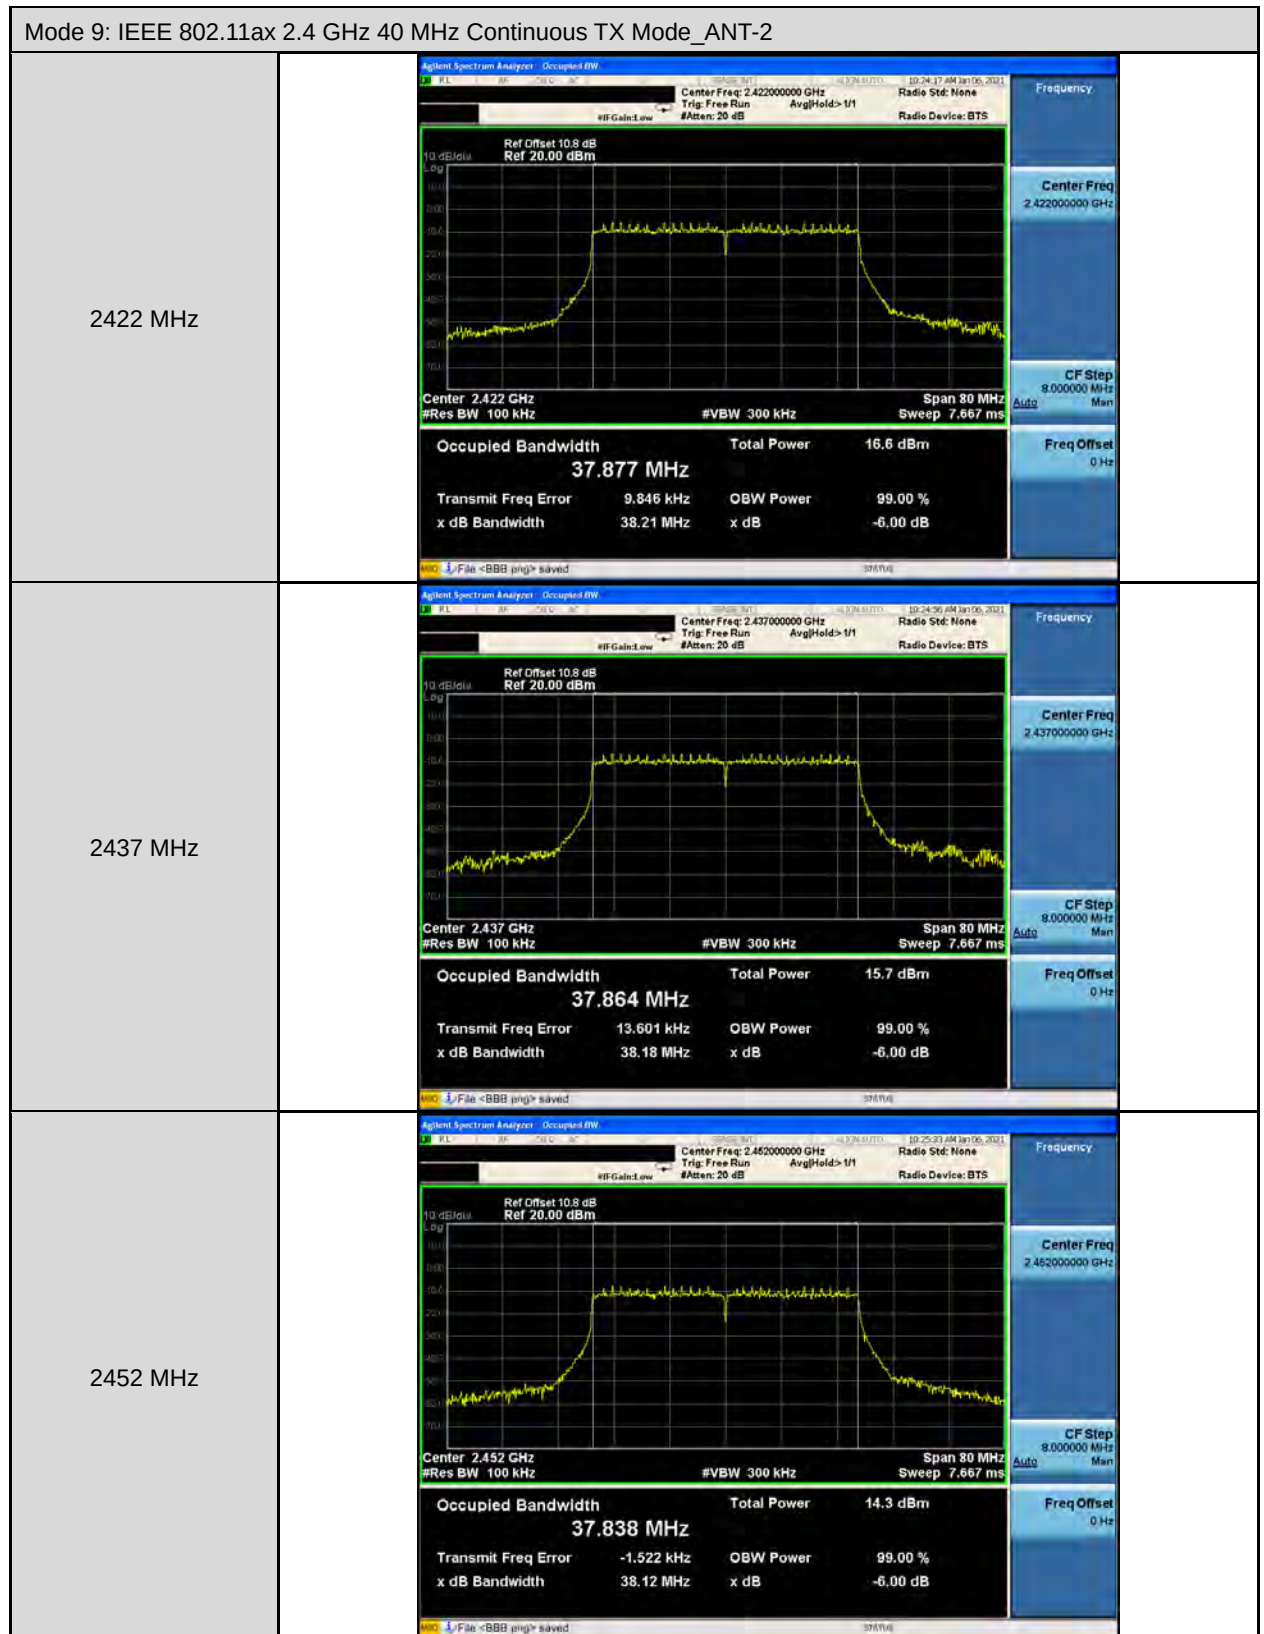

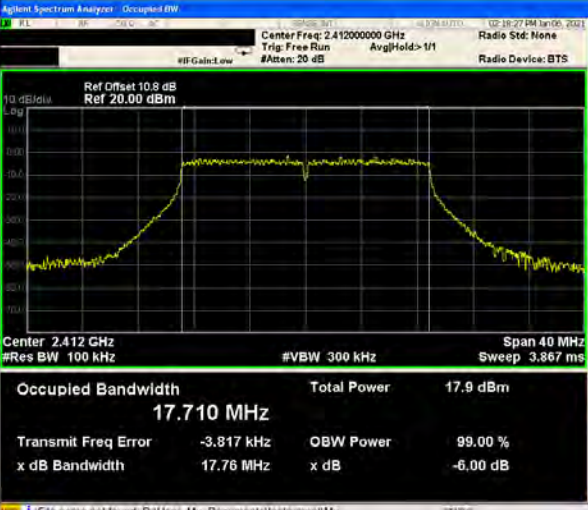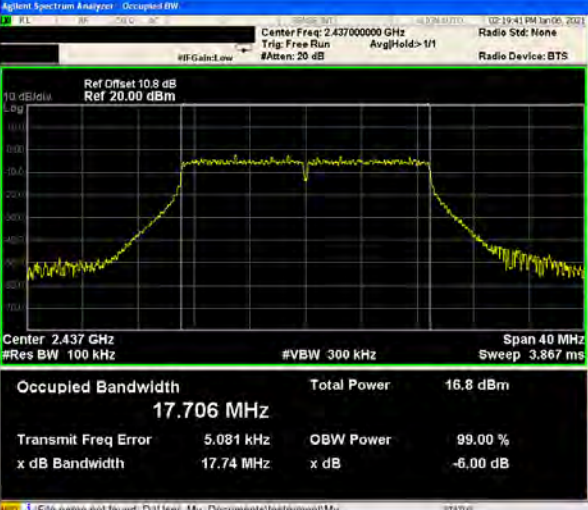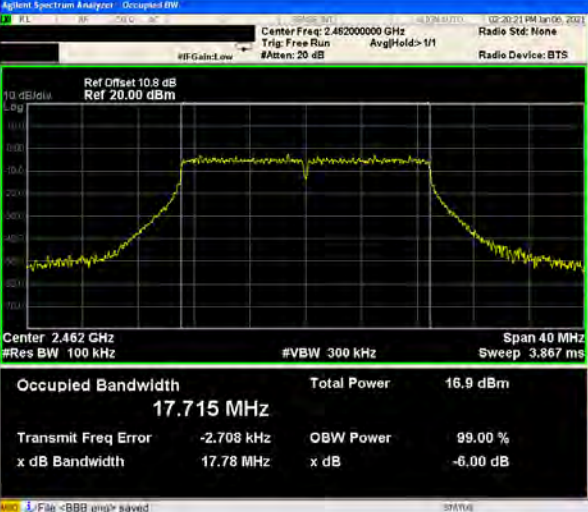Mode 6: IEEE 802.11n 2.4 GHz 20 MHz(256QAM) Continuous TX Mode_ANT-3		
2412 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.41200000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 17.710 MHz Total Power 17.9 dBm Transmit Freq Error -3.817 kHz OBW Power 99.00 % x dB Bandwidth 17.76 MHz x dB -6.00 dB Frequency Center Freq 2.41200000 GHz CF Step 4.000000 MHz Freq Offset 0 Hz
2437 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 17.706 MHz Total Power 16.8 dBm Transmit Freq Error 5.081 kHz OBW Power 99.00 % x dB Bandwidth 17.74 MHz x dB -6.00 dB Frequency Center Freq 2.43700000 GHz CF Step 4.000000 MHz Freq Offset 0 Hz
2462 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.46200000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 17.715 MHz Total Power 16.9 dBm Transmit Freq Error -2.708 kHz OBW Power 99.00 % x dB Bandwidth 17.78 MHz x dB -6.00 dB Frequency Center Freq 2.46200000 GHz CF Step 4.000000 MHz Freq Offset 0 Hz

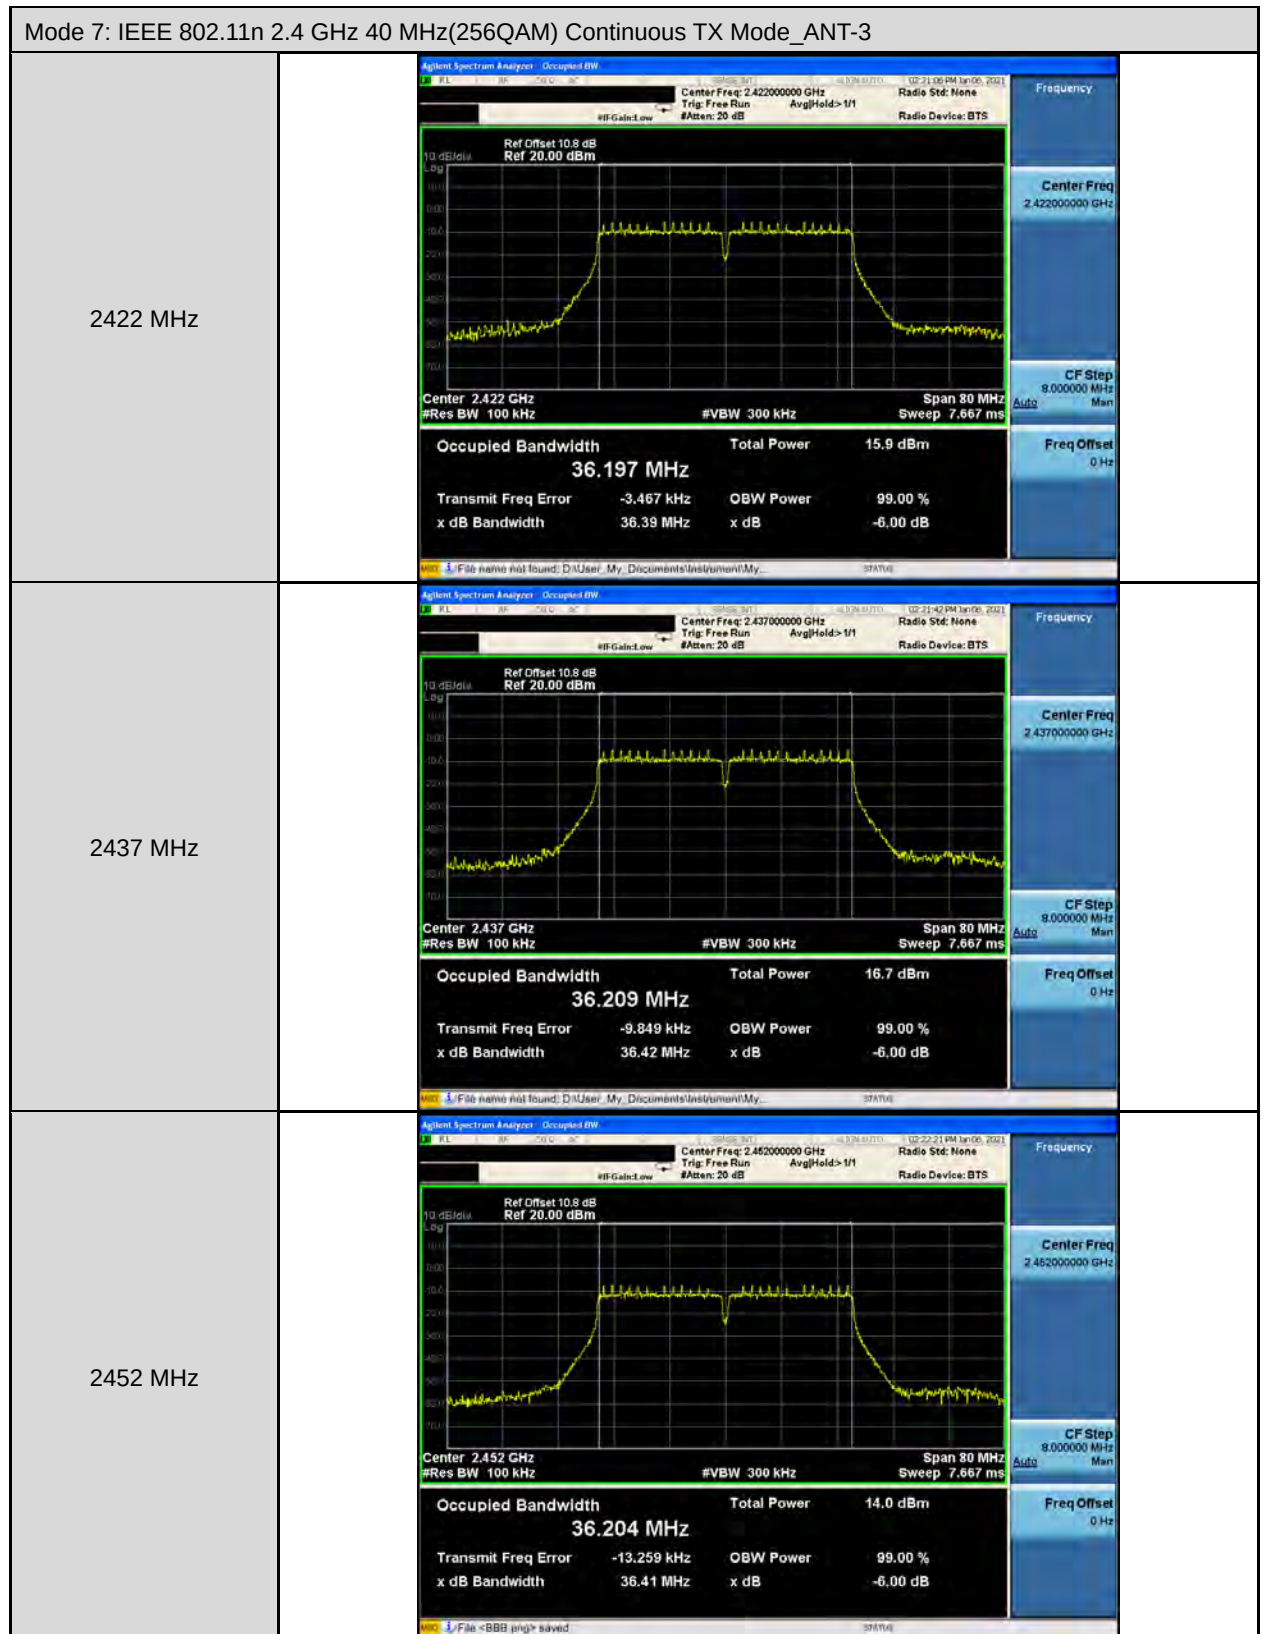



Mode 8: IEEE 802.11ax 2.4 GHz 20 MHz Continuous TX Mode_ANT-3		
2412 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.41200000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 18.986 MHz Total Power 16.2 dBm Transmit Freq Error -5.197 kHz OBW Power 99.00 % x dB Bandwidth 19.11 MHz x dB -6.00 dB Frequency Center Freq 2.41200000 GHz CF Step 4.000000 MHz Freq Offset 0 Hz
2437 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 18.980 MHz Total Power 15.0 dBm Transmit Freq Error -1.220 kHz OBW Power 99.00 % x dB Bandwidth 19.10 MHz x dB -6.00 dB Frequency Center Freq 2.43700000 GHz CF Step 4.000000 MHz Freq Offset 0 Hz
2462 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.46200000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 18.977 MHz Total Power 15.1 dBm Transmit Freq Error -9.061 kHz OBW Power 99.00 % x dB Bandwidth 19.09 MHz x dB -6.00 dB Frequency Center Freq 2.46200000 GHz CF Step 4.000000 MHz Freq Offset 0 Hz

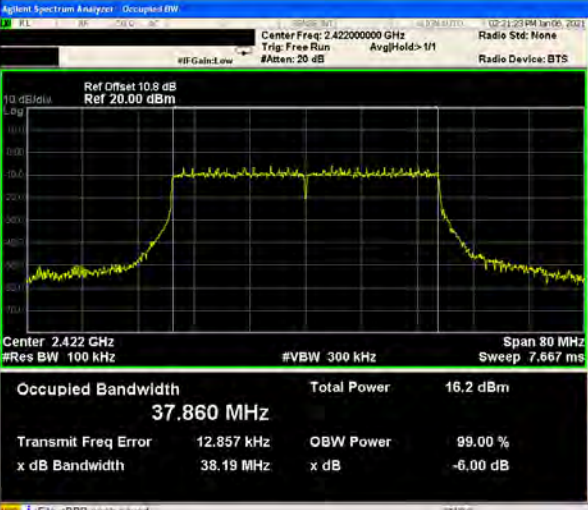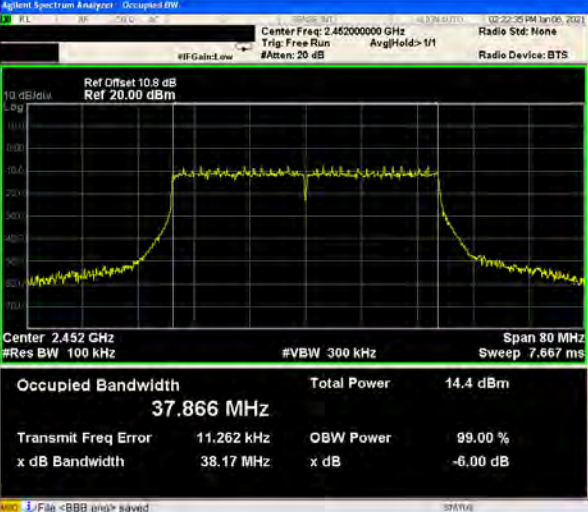
Mode 9: IEEE 802.11ax 2.4 GHz 40 MHz Continuous TX Mode_ANT-3		
2422 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.42200000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 37.860 MHz Total Power 16.2 dBm Transmit Freq Error 12.857 kHz OBW Power 99.00 % x dB Bandwidth 38.19 MHz x dB -6.00 dB File <BBB.png> saved
2437 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 37.880 MHz Total Power 15.4 dBm Transmit Freq Error 24.765 kHz OBW Power 99.00 % x dB Bandwidth 38.18 MHz x dB -6.00 dB File <BBB.png> saved
2452 MHz		 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.45200000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 10.8 dB Ref 20.00 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms Occupied Bandwidth 37.866 MHz Total Power 14.4 dBm Transmit Freq Error 11.262 kHz OBW Power 99.00 % x dB Bandwidth 38.17 MHz x dB -6.00 dB File <BBB.png> saved


Maximum Power Spectral Density


Test Mode	Frequency (MHz)	量測值 (dBm/3 kHz)				計算值 (dBm/3 kHz)	Limit (dBm/3 kHz)
		ANT-0	ANT-1	ANT-2	ANT-3	ANT-0+1+2+3	
Mode 2	2412	-3.617	---	---	---	---	≤ 8.00
	2437	-3.110	---	---	---	---	≤ 8.00
	2462	-4.029	---	---	---	---	≤ 8.00
Mode 3	2412	-10.321	---	---	---	---	≤ 8.00
	2437	-10.620	---	---	---	---	≤ 8.00
	2462	-9.027	---	---	---	---	≤ 8.00
Mode 6	2412	-14.426	-14.384	-14.338	-13.761	-8.198	≤ 3.48
	2437	-15.854	-14.682	-14.681	-15.226	-9.064	≤ 3.48
	2462	-15.559	-14.767	-14.724	-14.409	-8.824	≤ 3.48
Mode 7	2422	-19.266	-20.203	-19.289	-18.744	-13.324	≤ 3.48
	2437	-18.983	-19.087	-18.505	-18.147	-12.643	≤ 3.48
	2452	-21.548	-21.167	-21.528	-21.601	-15.437	≤ 3.48
Mode 8	2412	-17.426	-17.333	-17.322	-17.568	-11.391	≤ 3.48
	2437	-17.822	-17.365	-17.320	-18.170	-11.635	≤ 3.48
	2462	-17.942	-17.806	-17.473	-17.571	-11.673	≤ 3.48
Mode 9	2422	-18.513	-19.437	-18.727	-19.767	-13.061	≤ 3.48
	2437	-19.686	-19.920	-20.019	-19.256	-13.690	≤ 3.48
	2452	-21.286	-21.972	-20.743	-20.844	-15.164	≤ 3.48

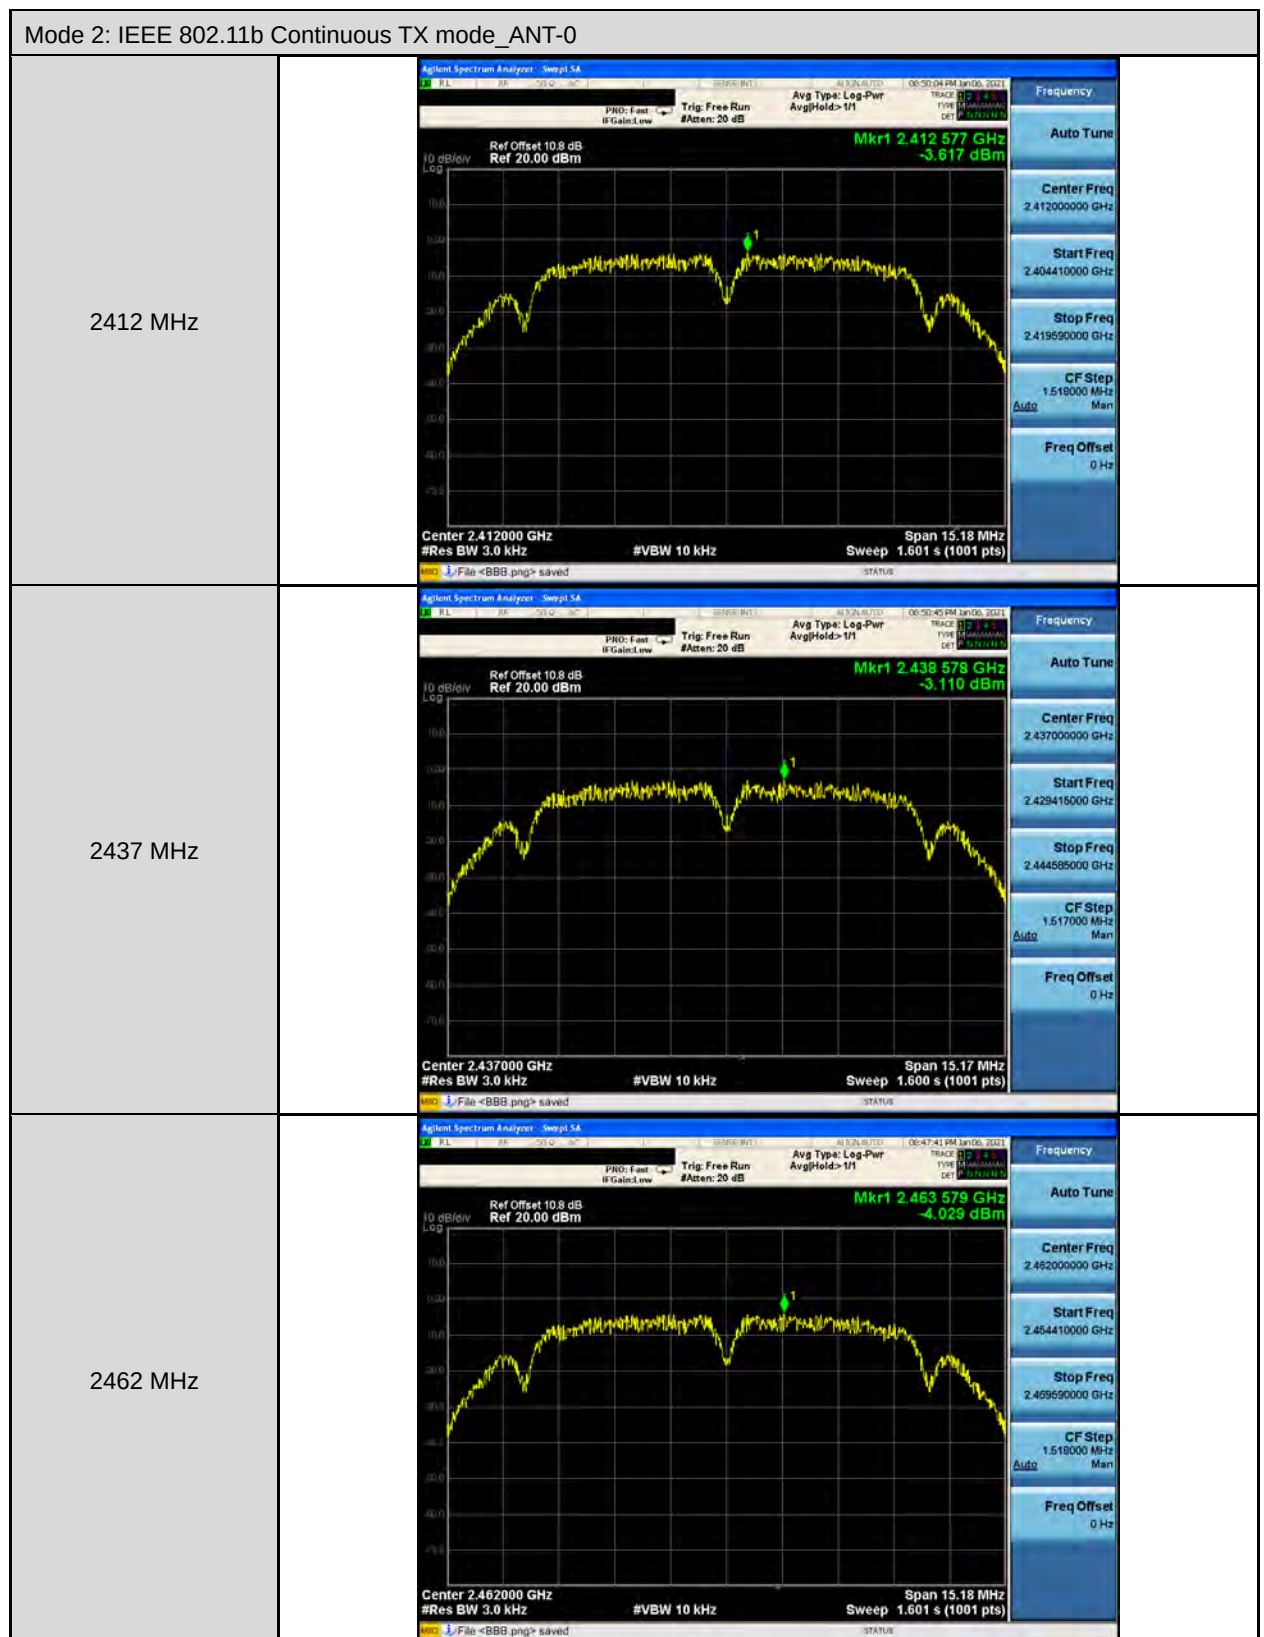


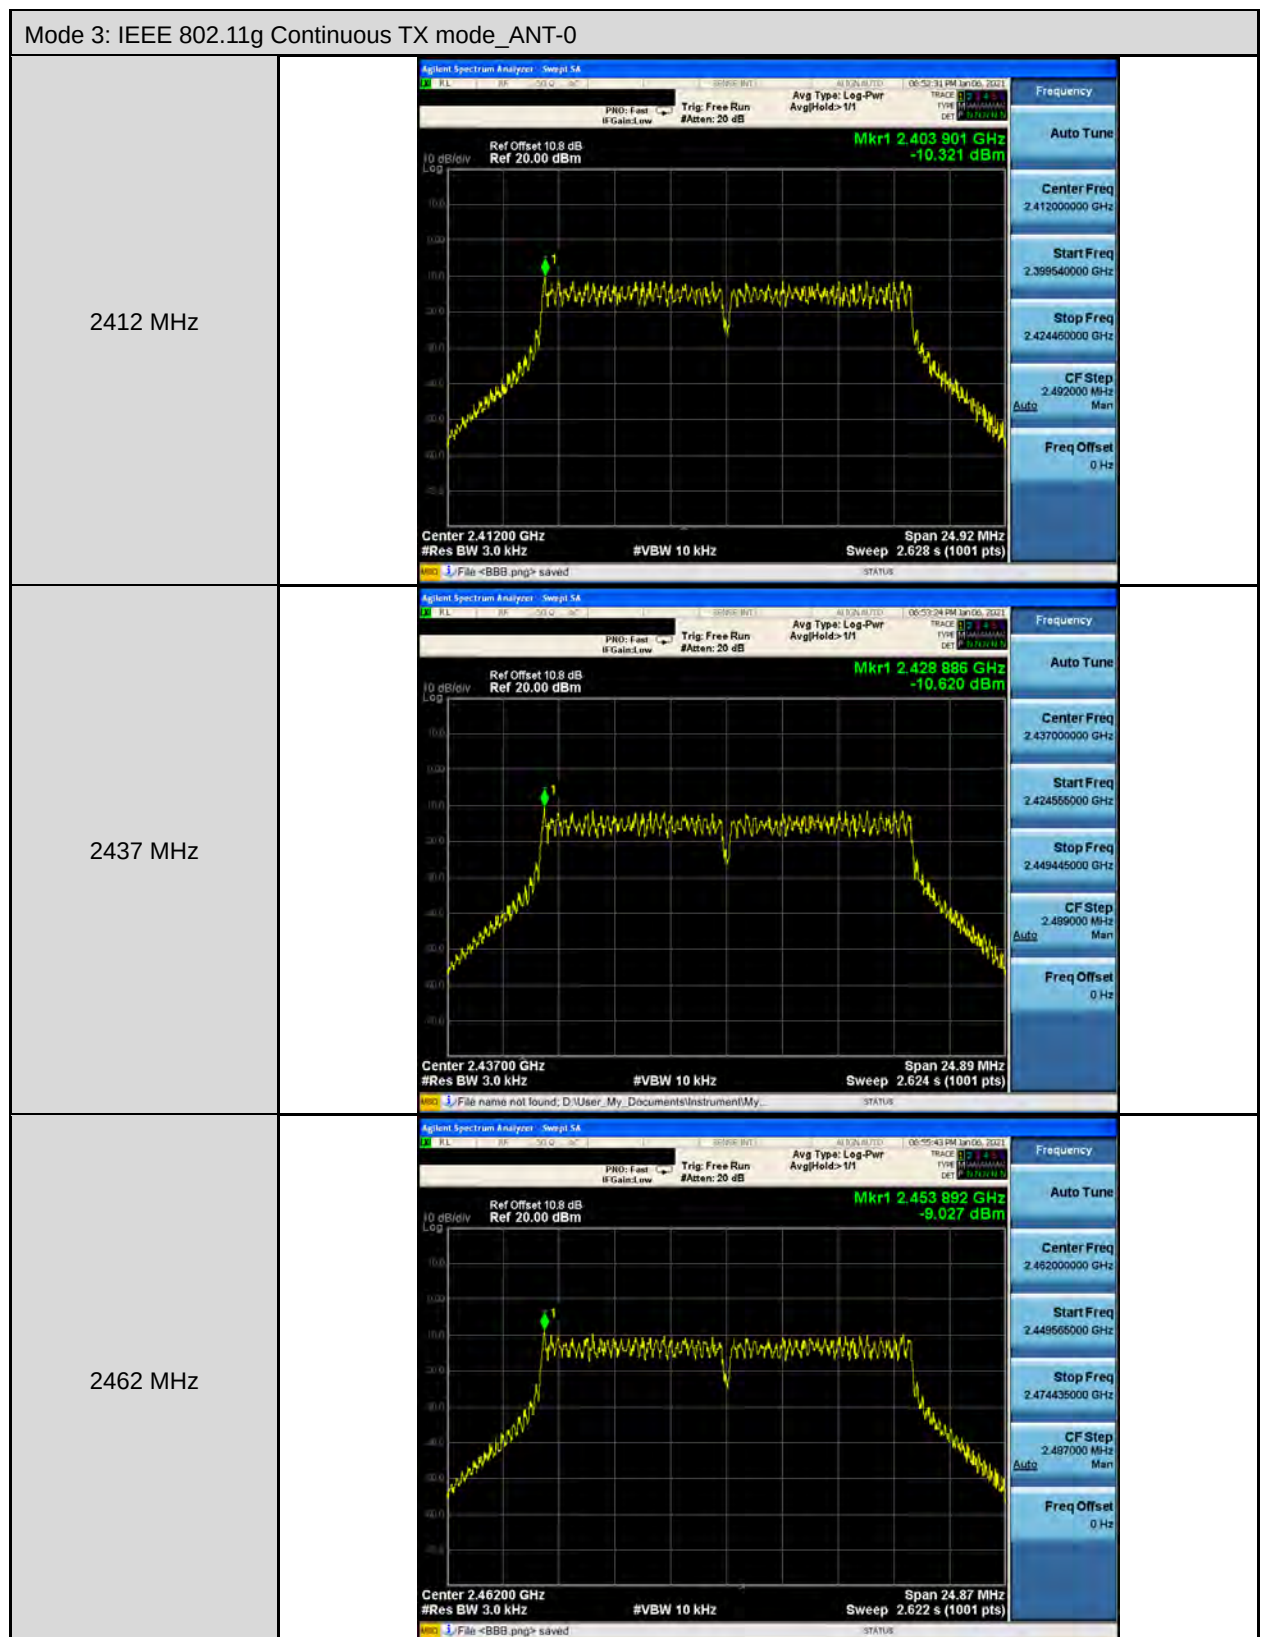


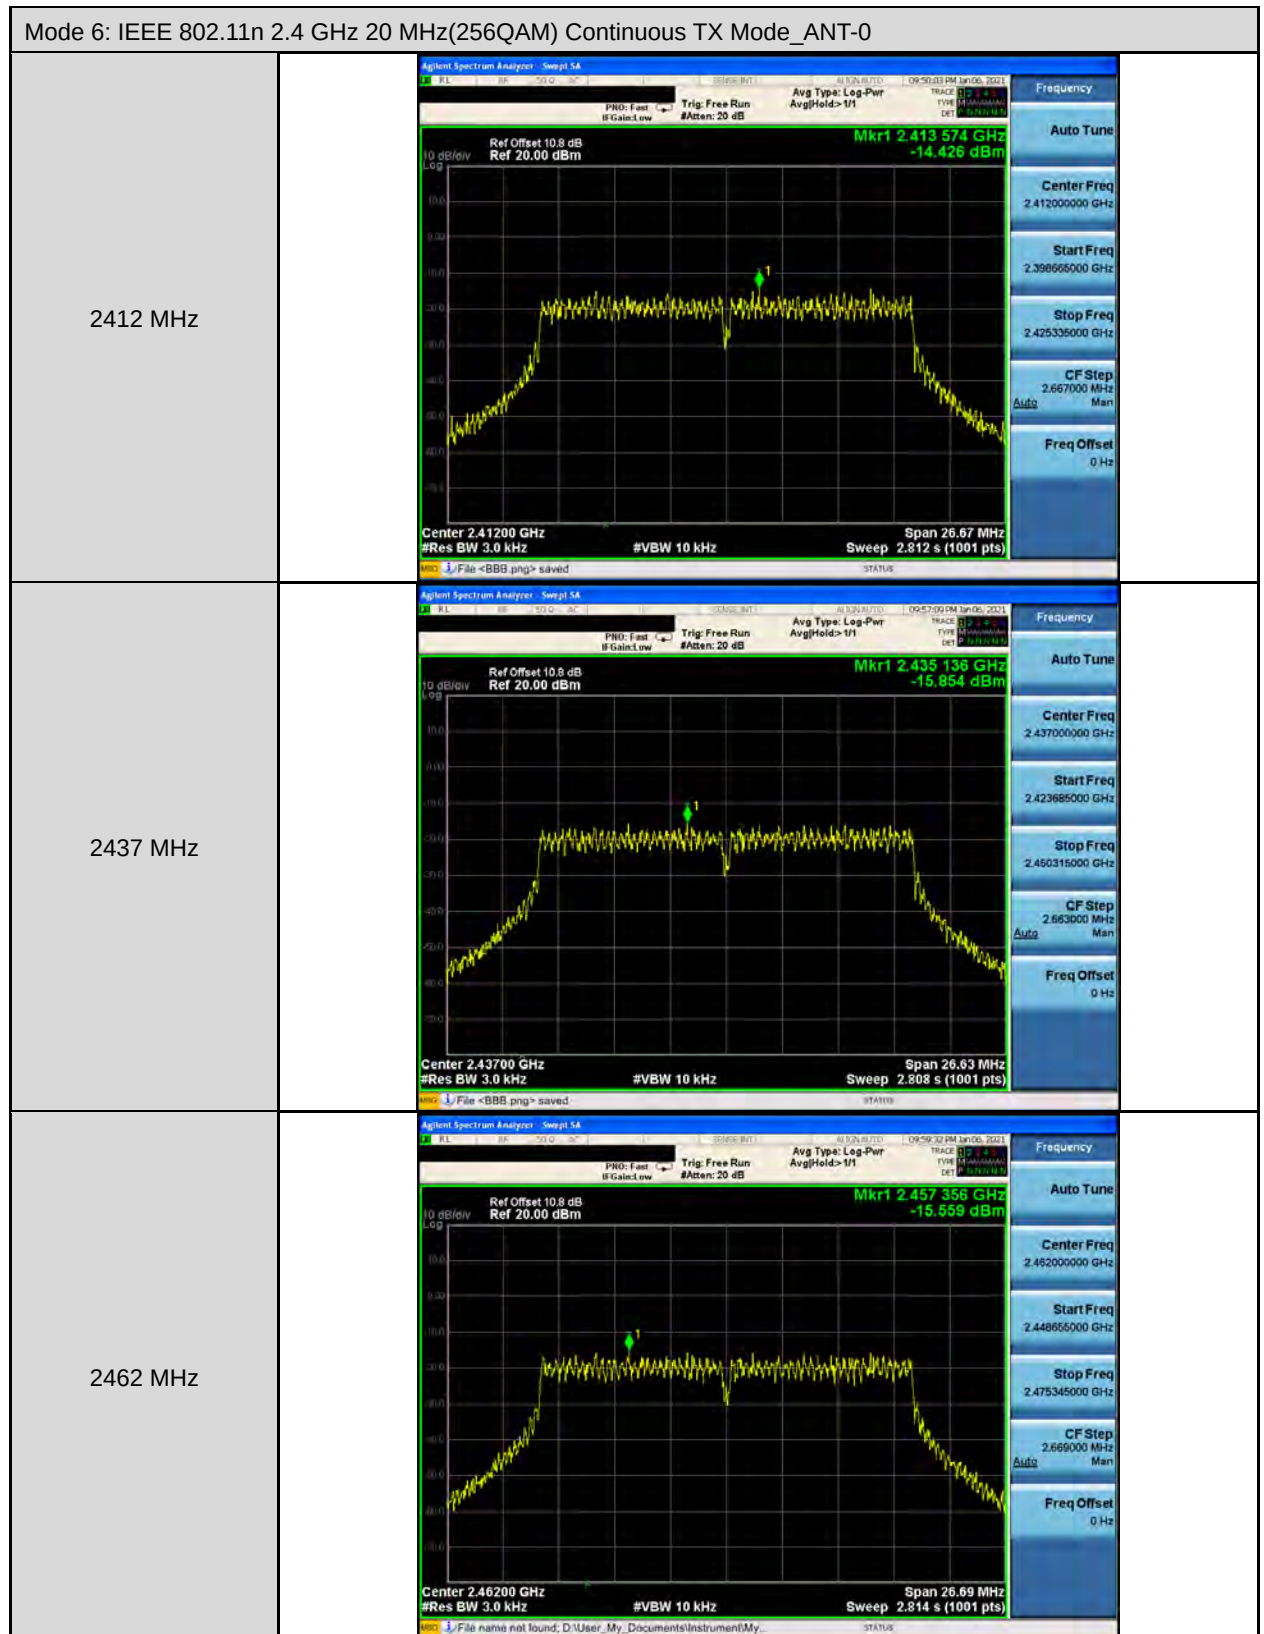


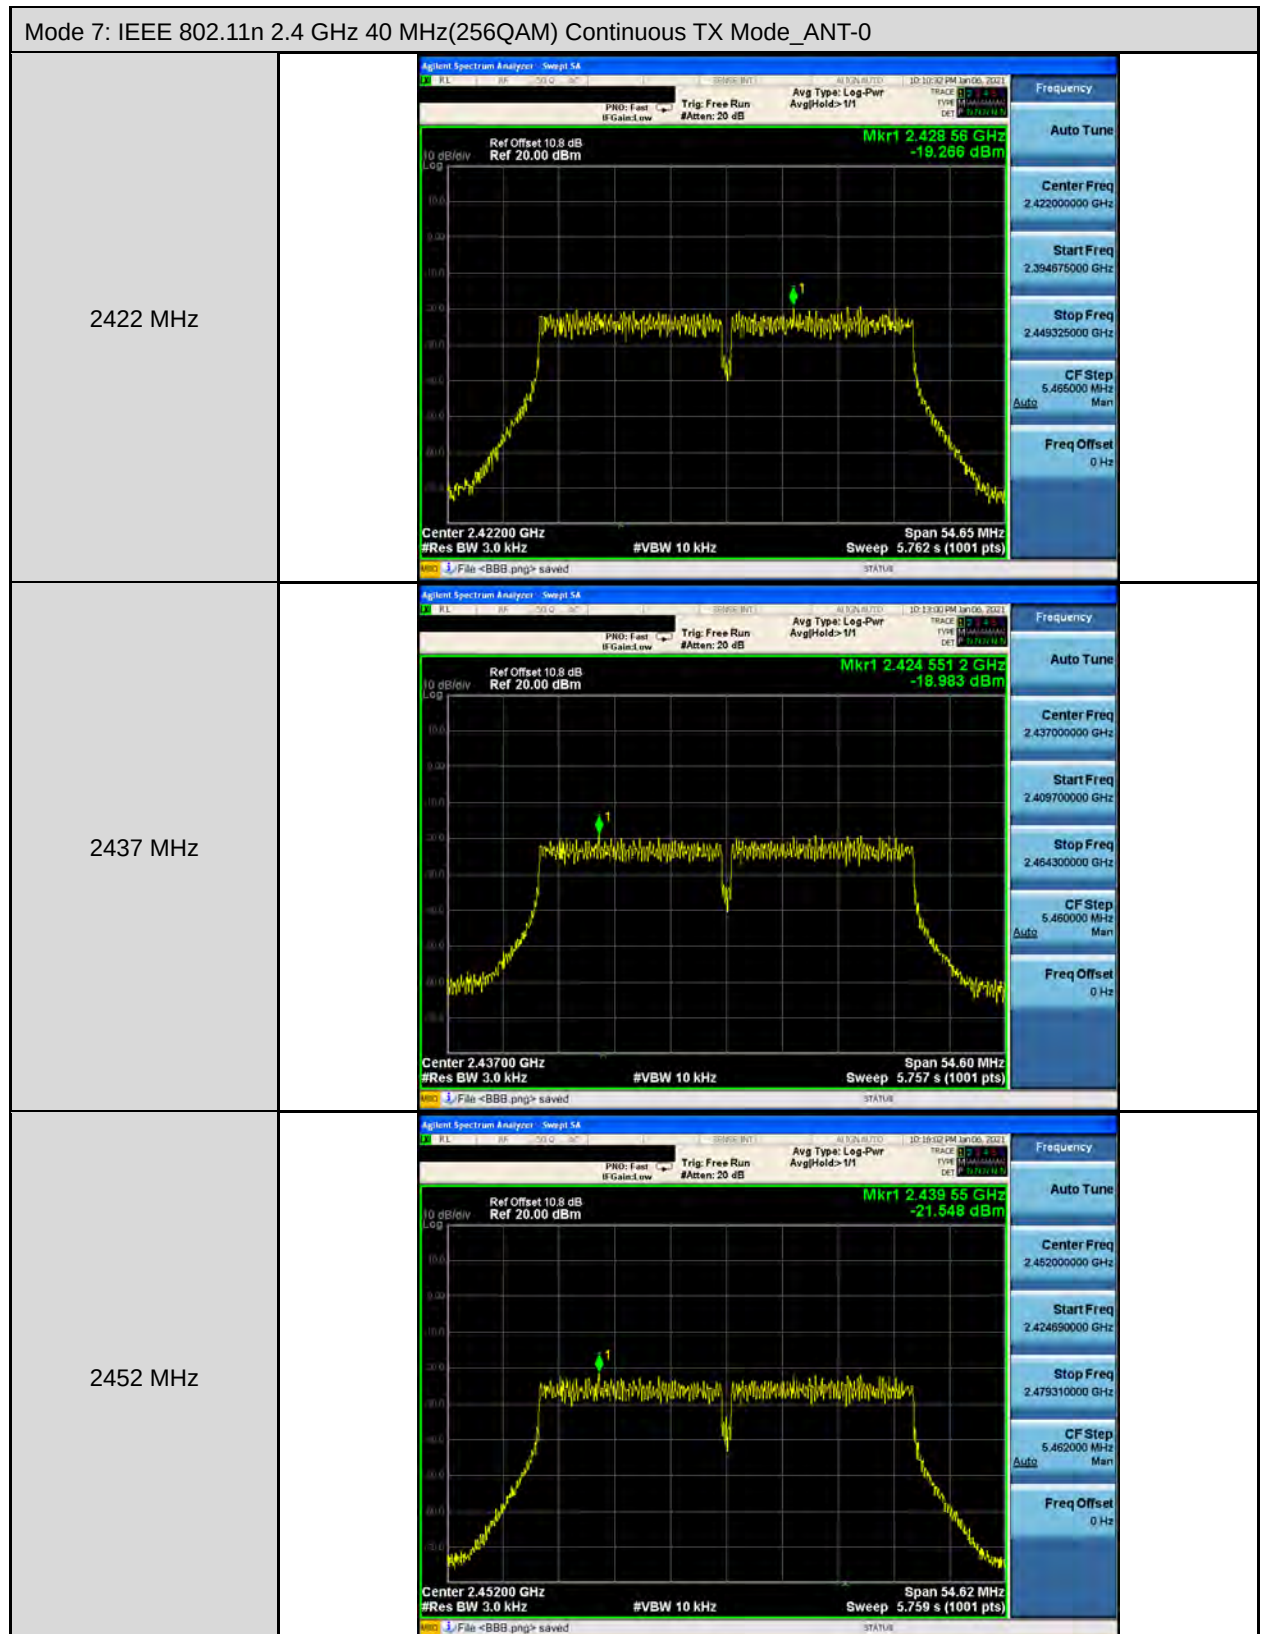


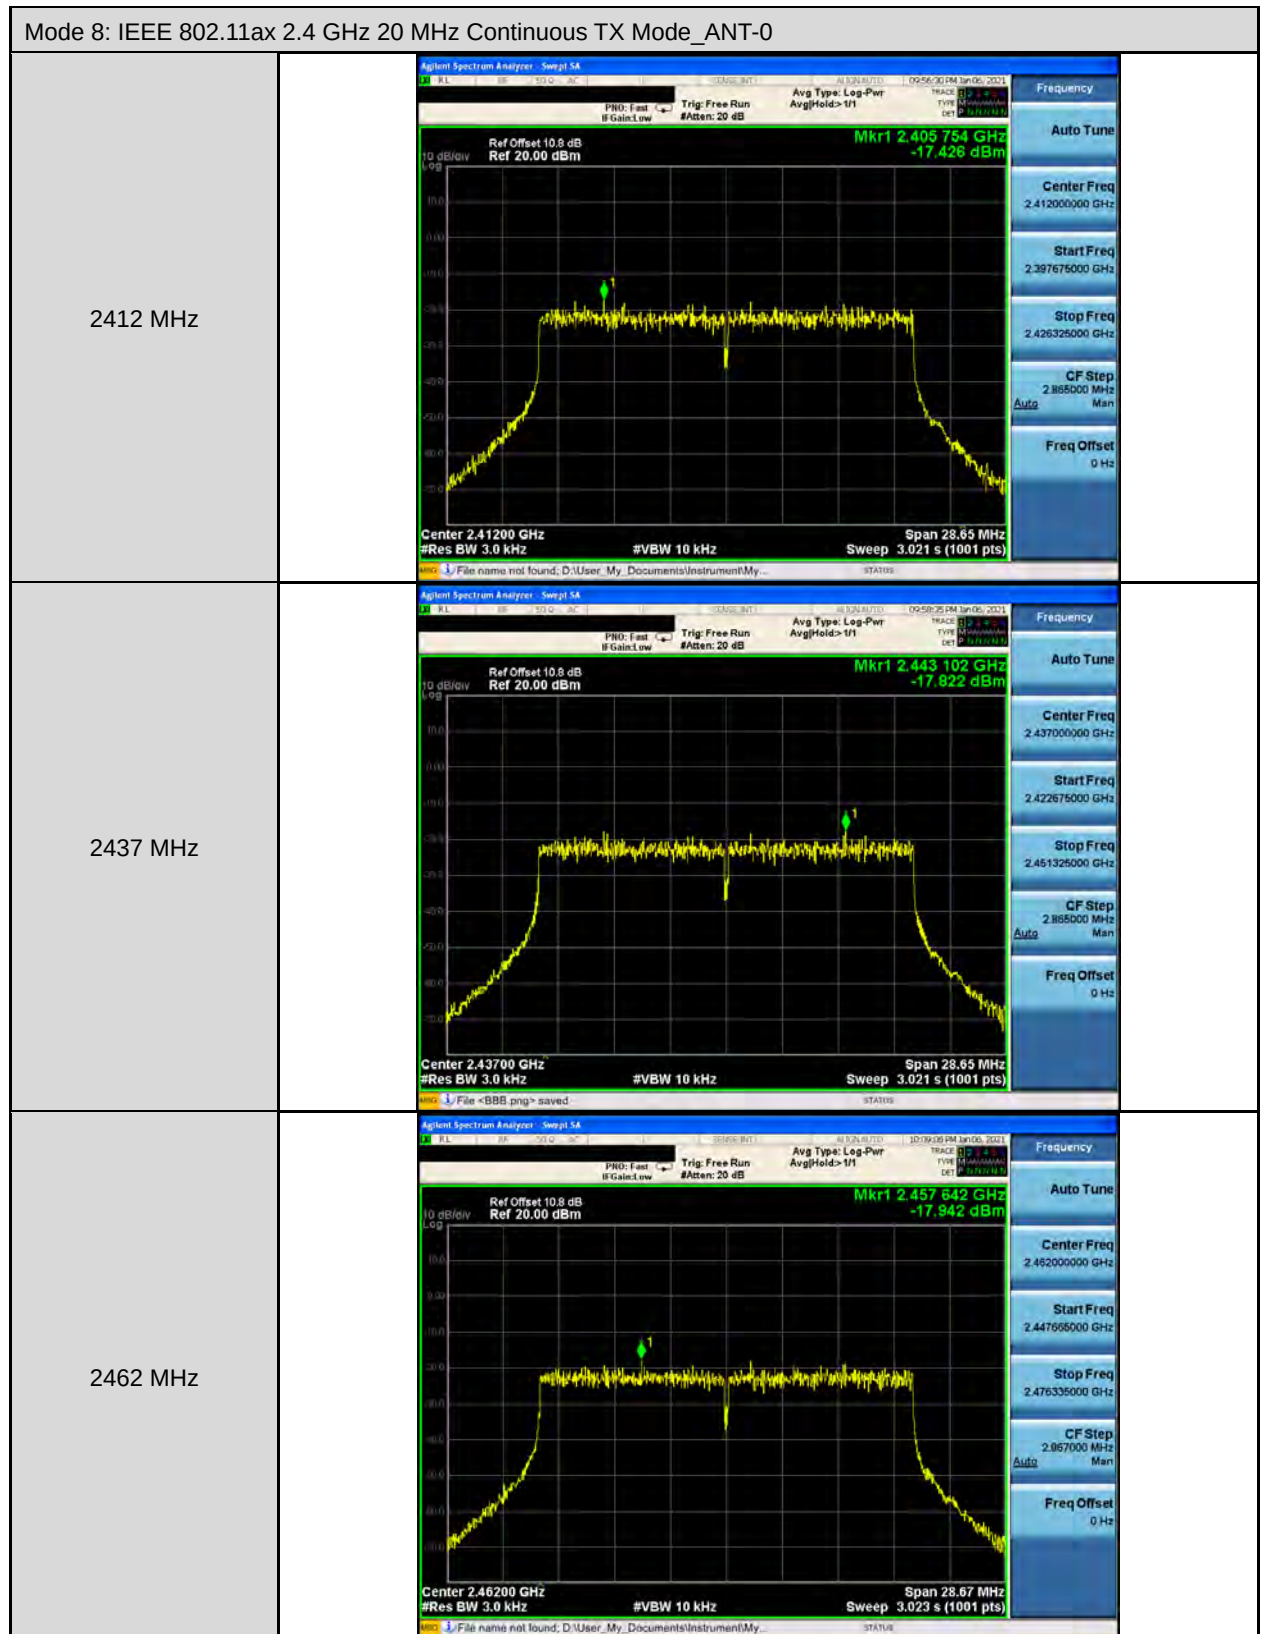


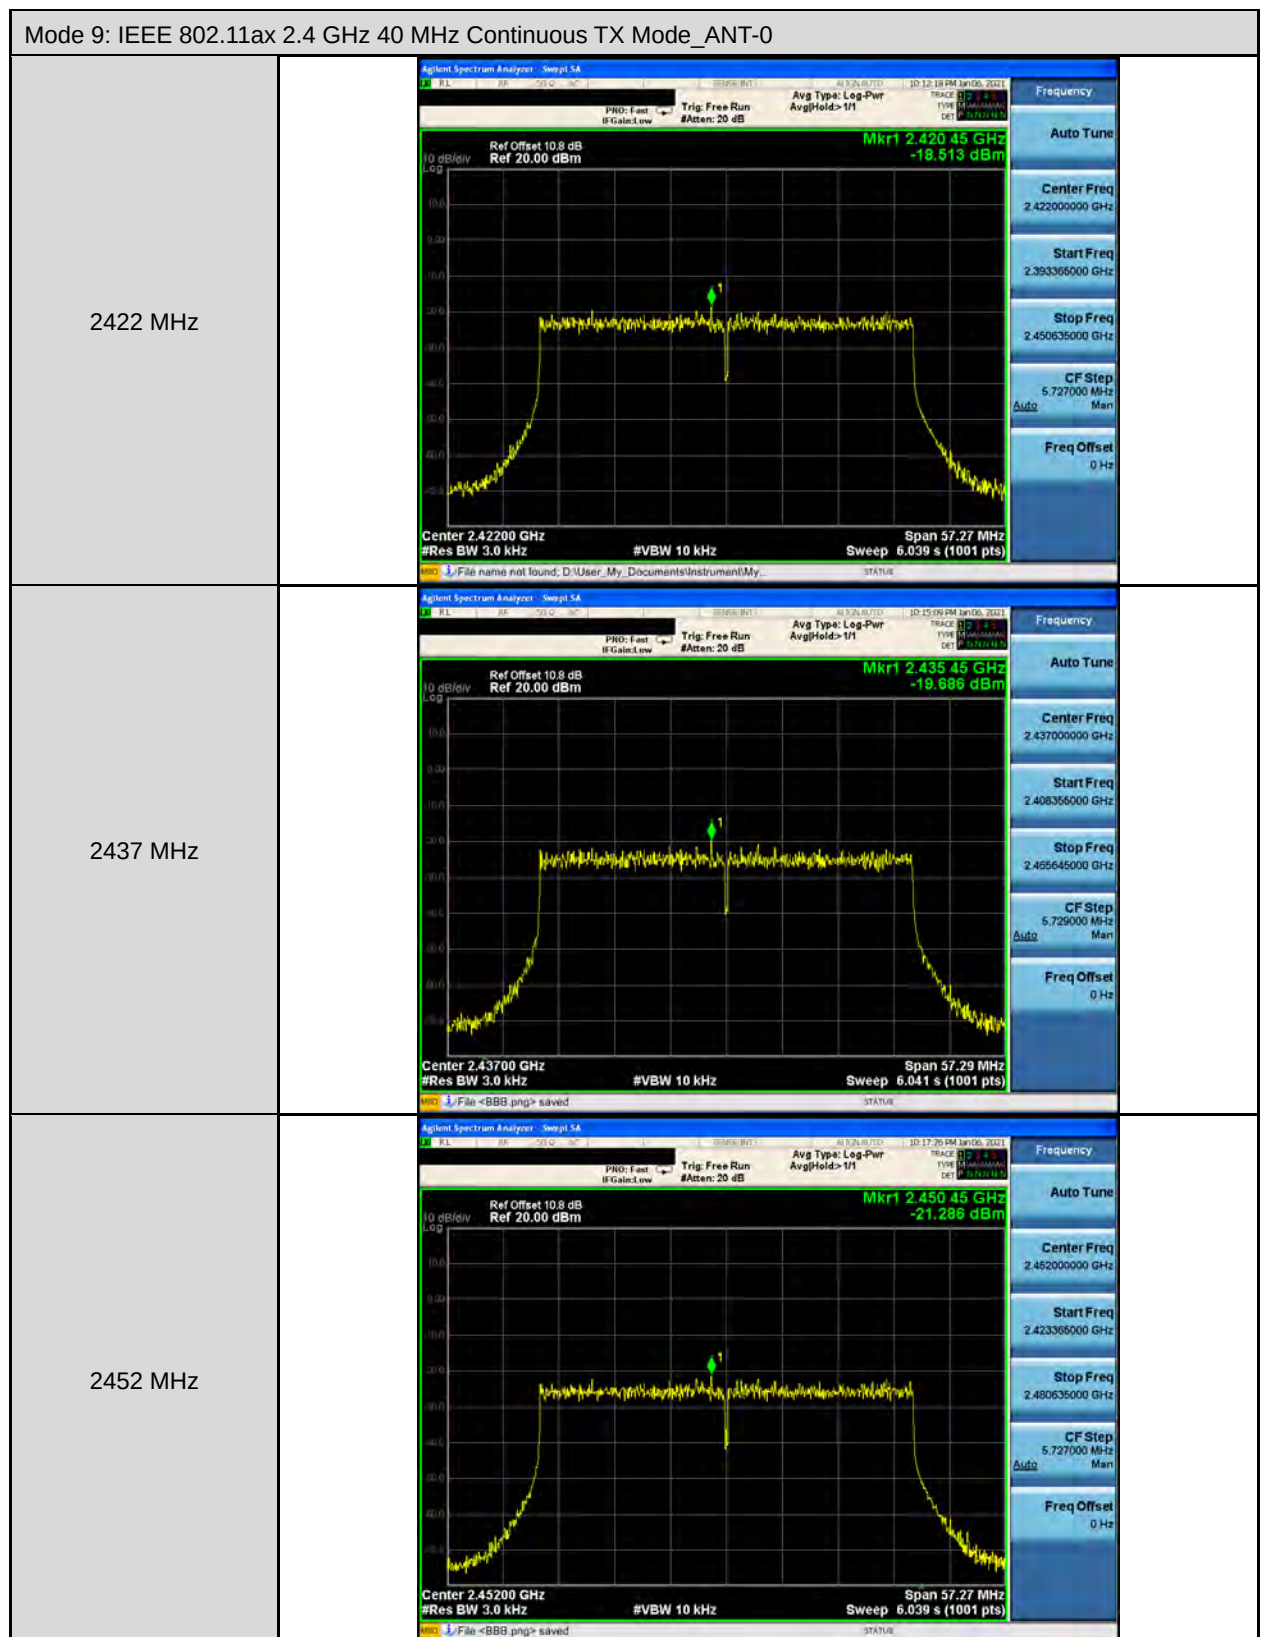


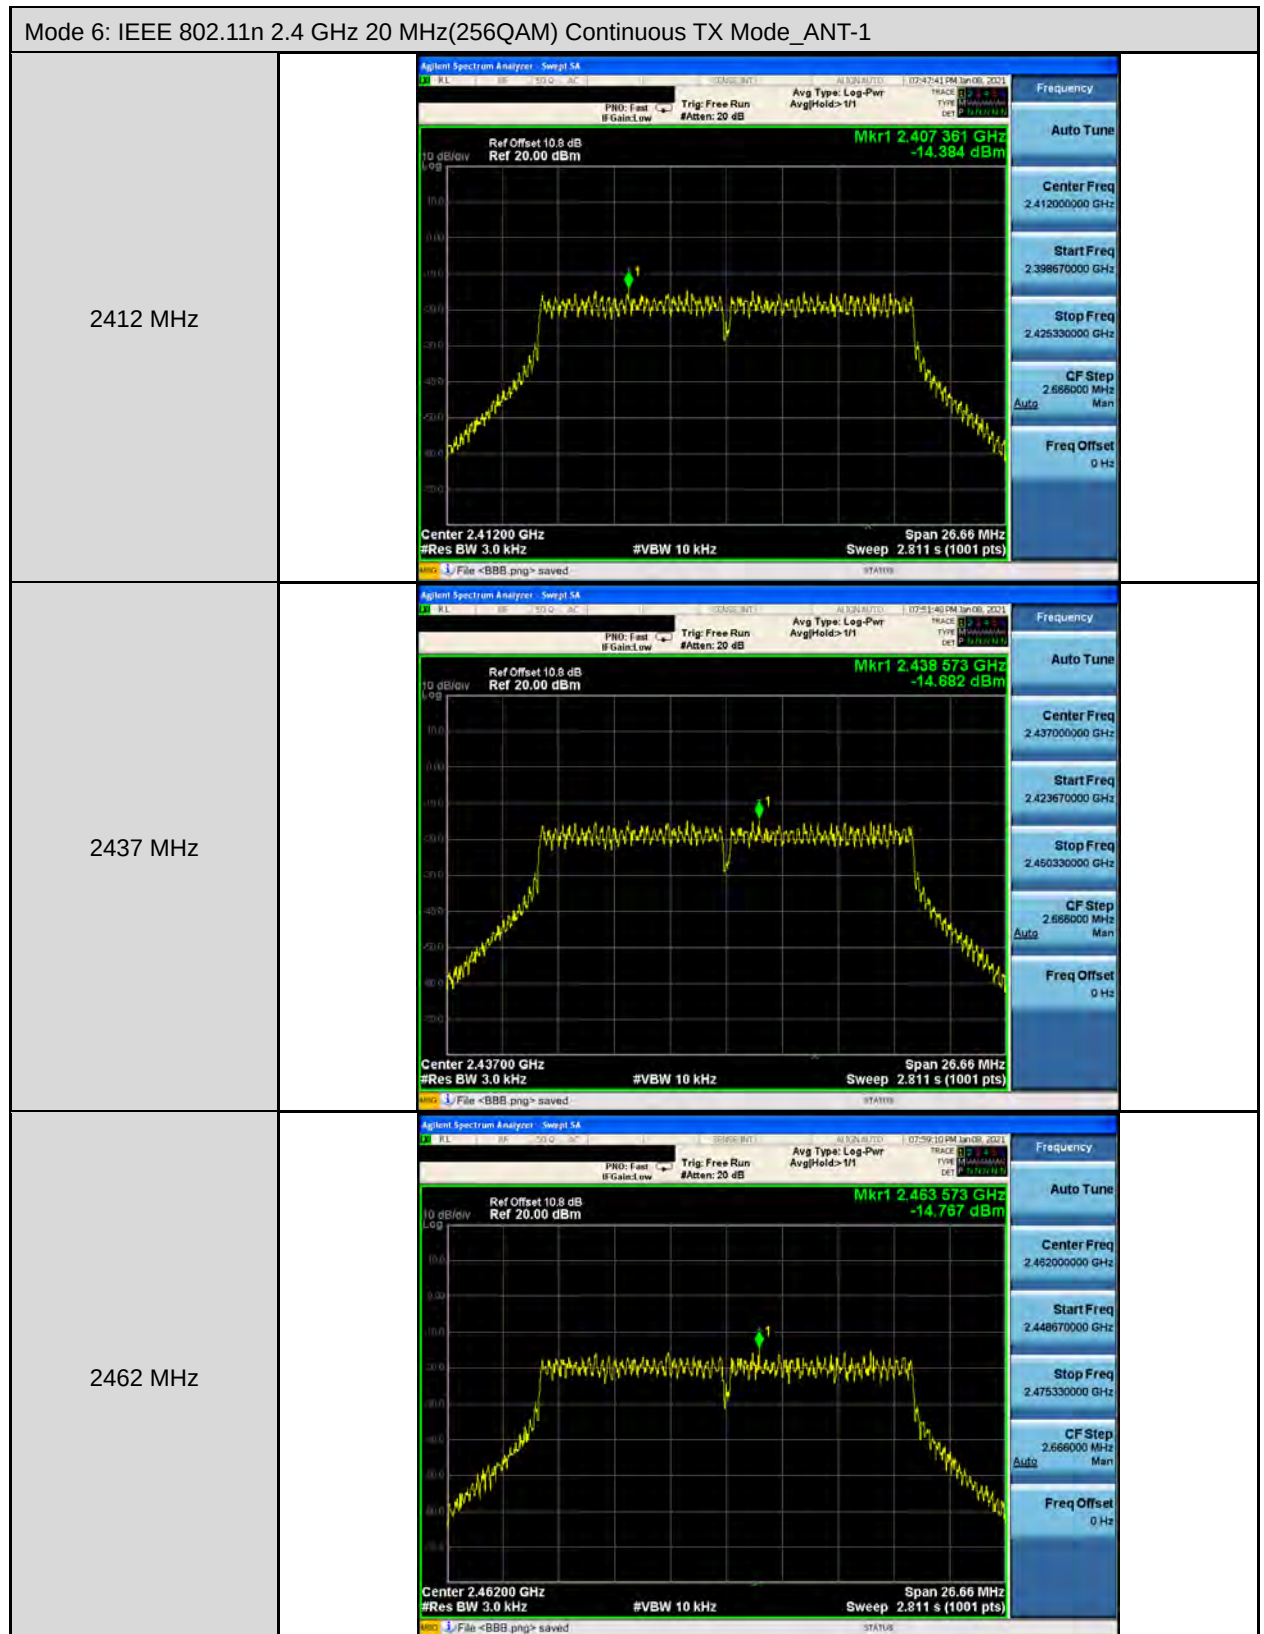


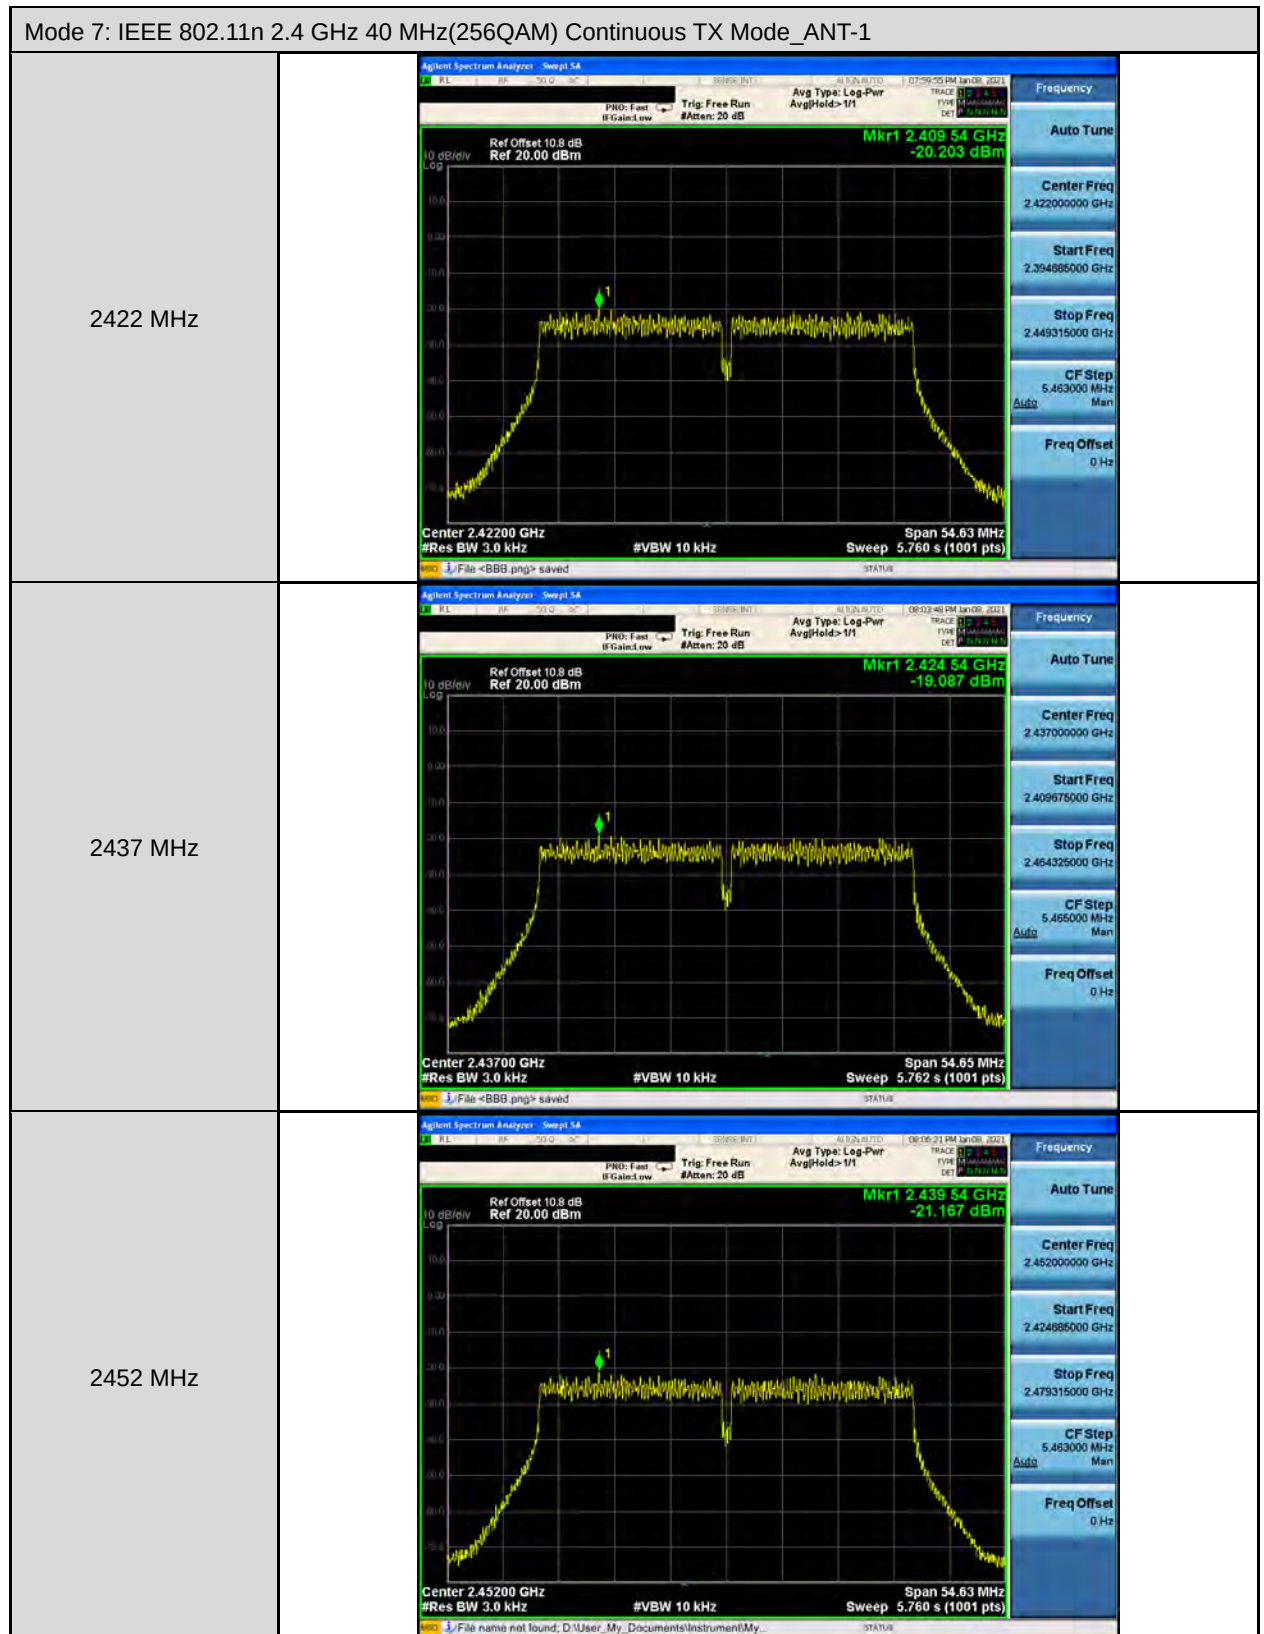


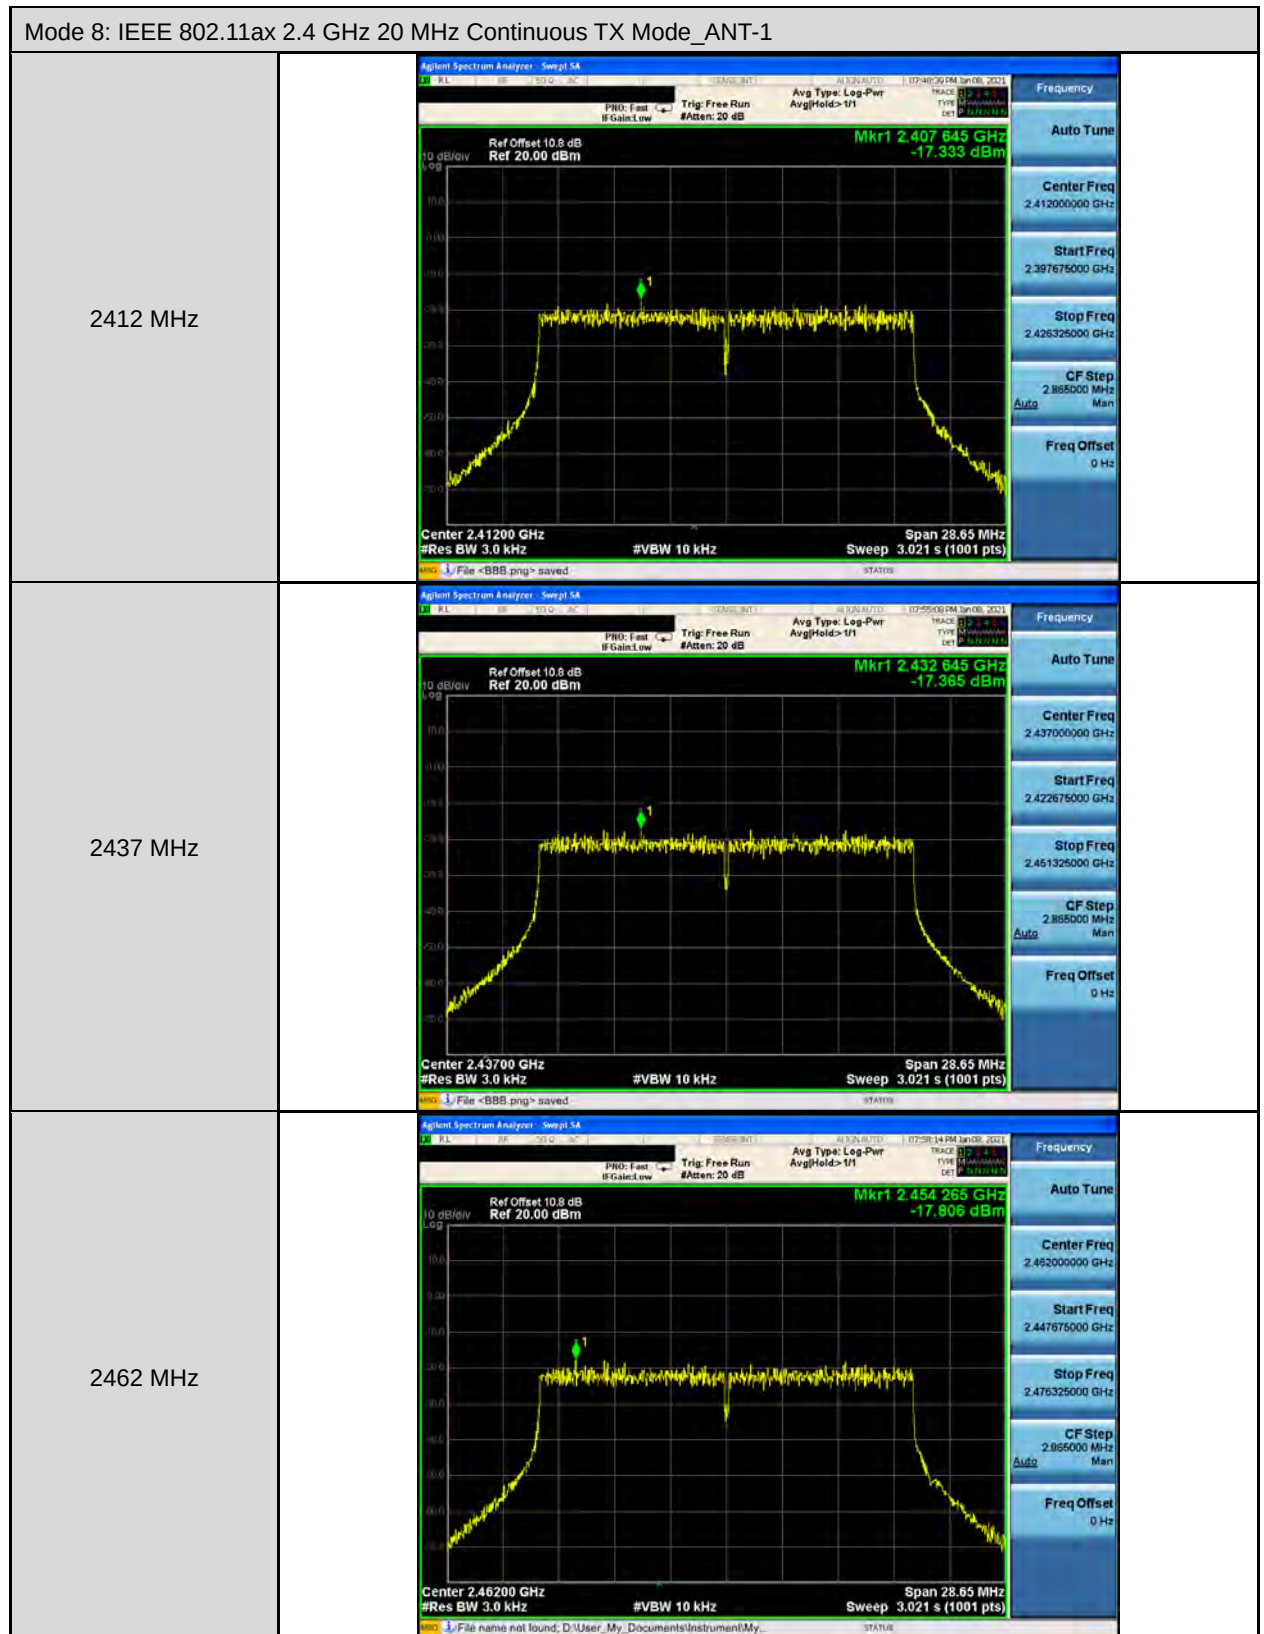


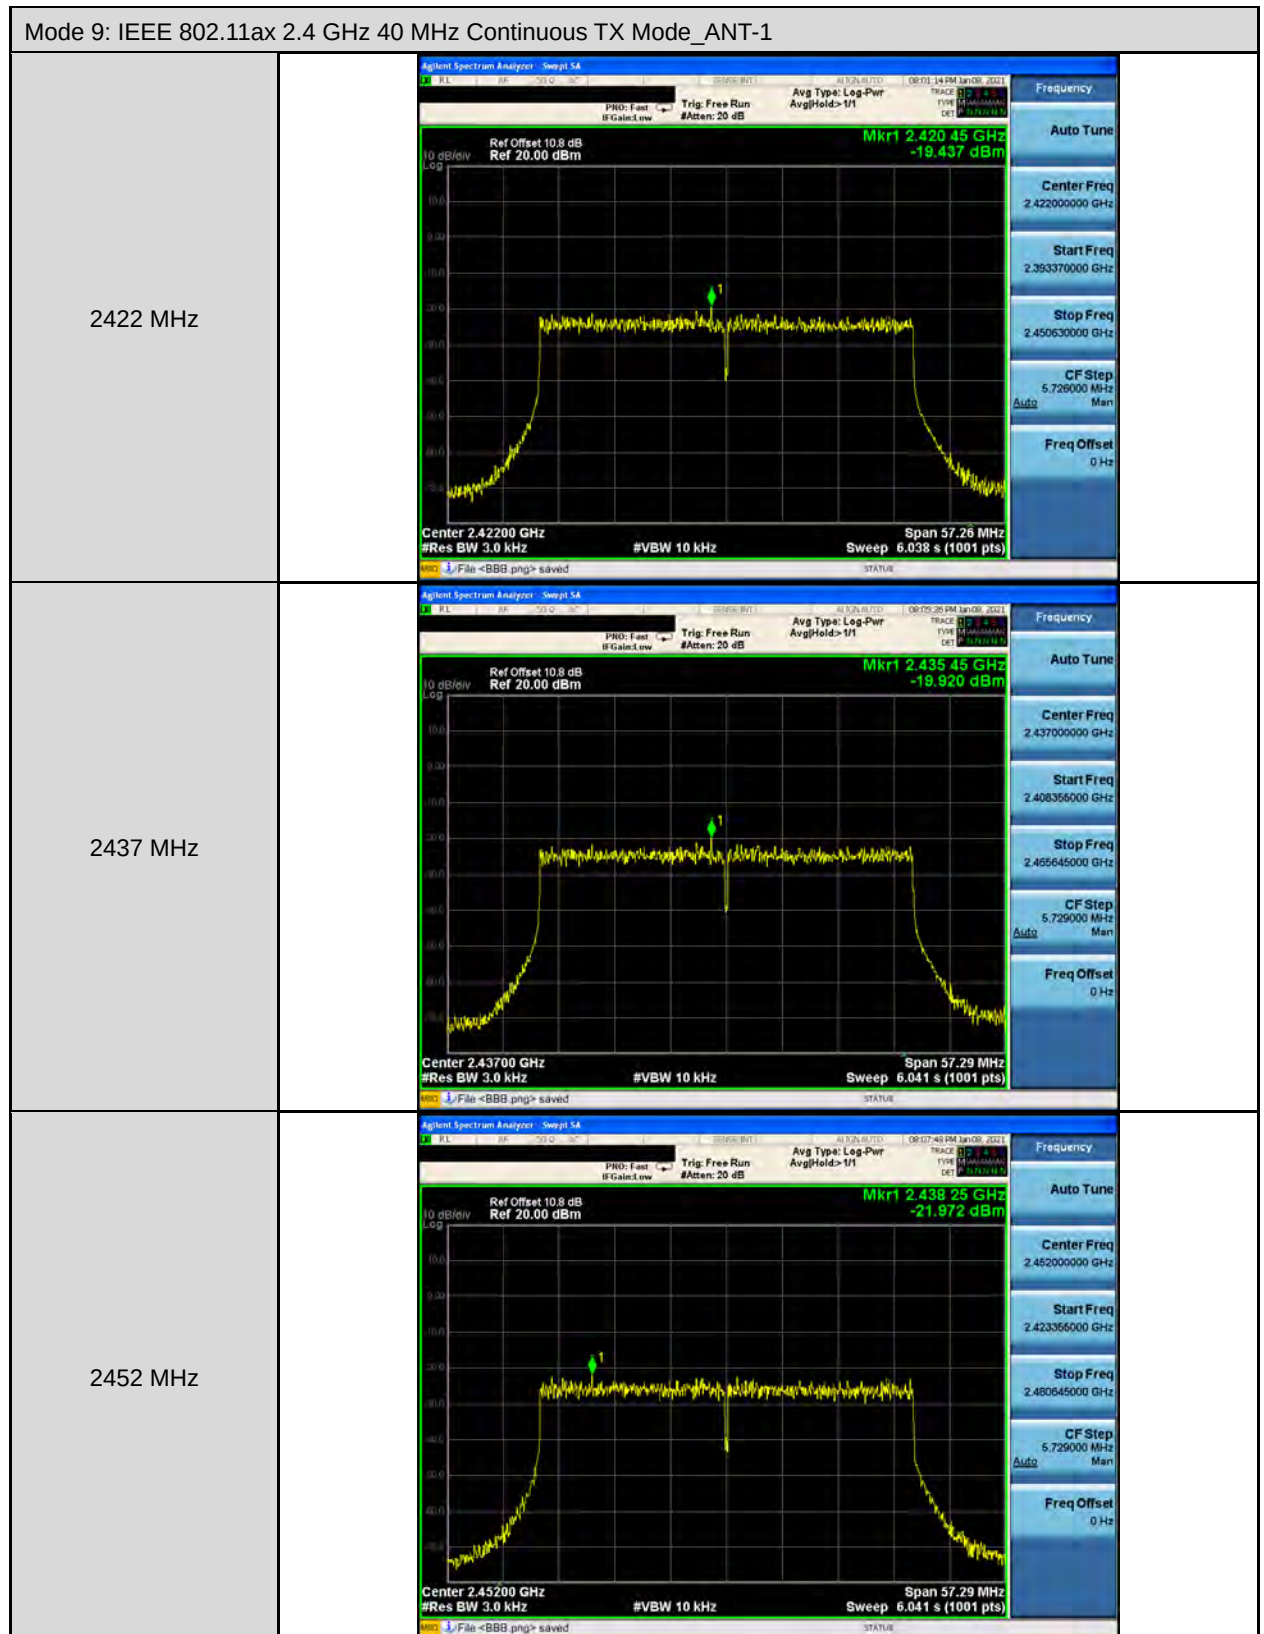


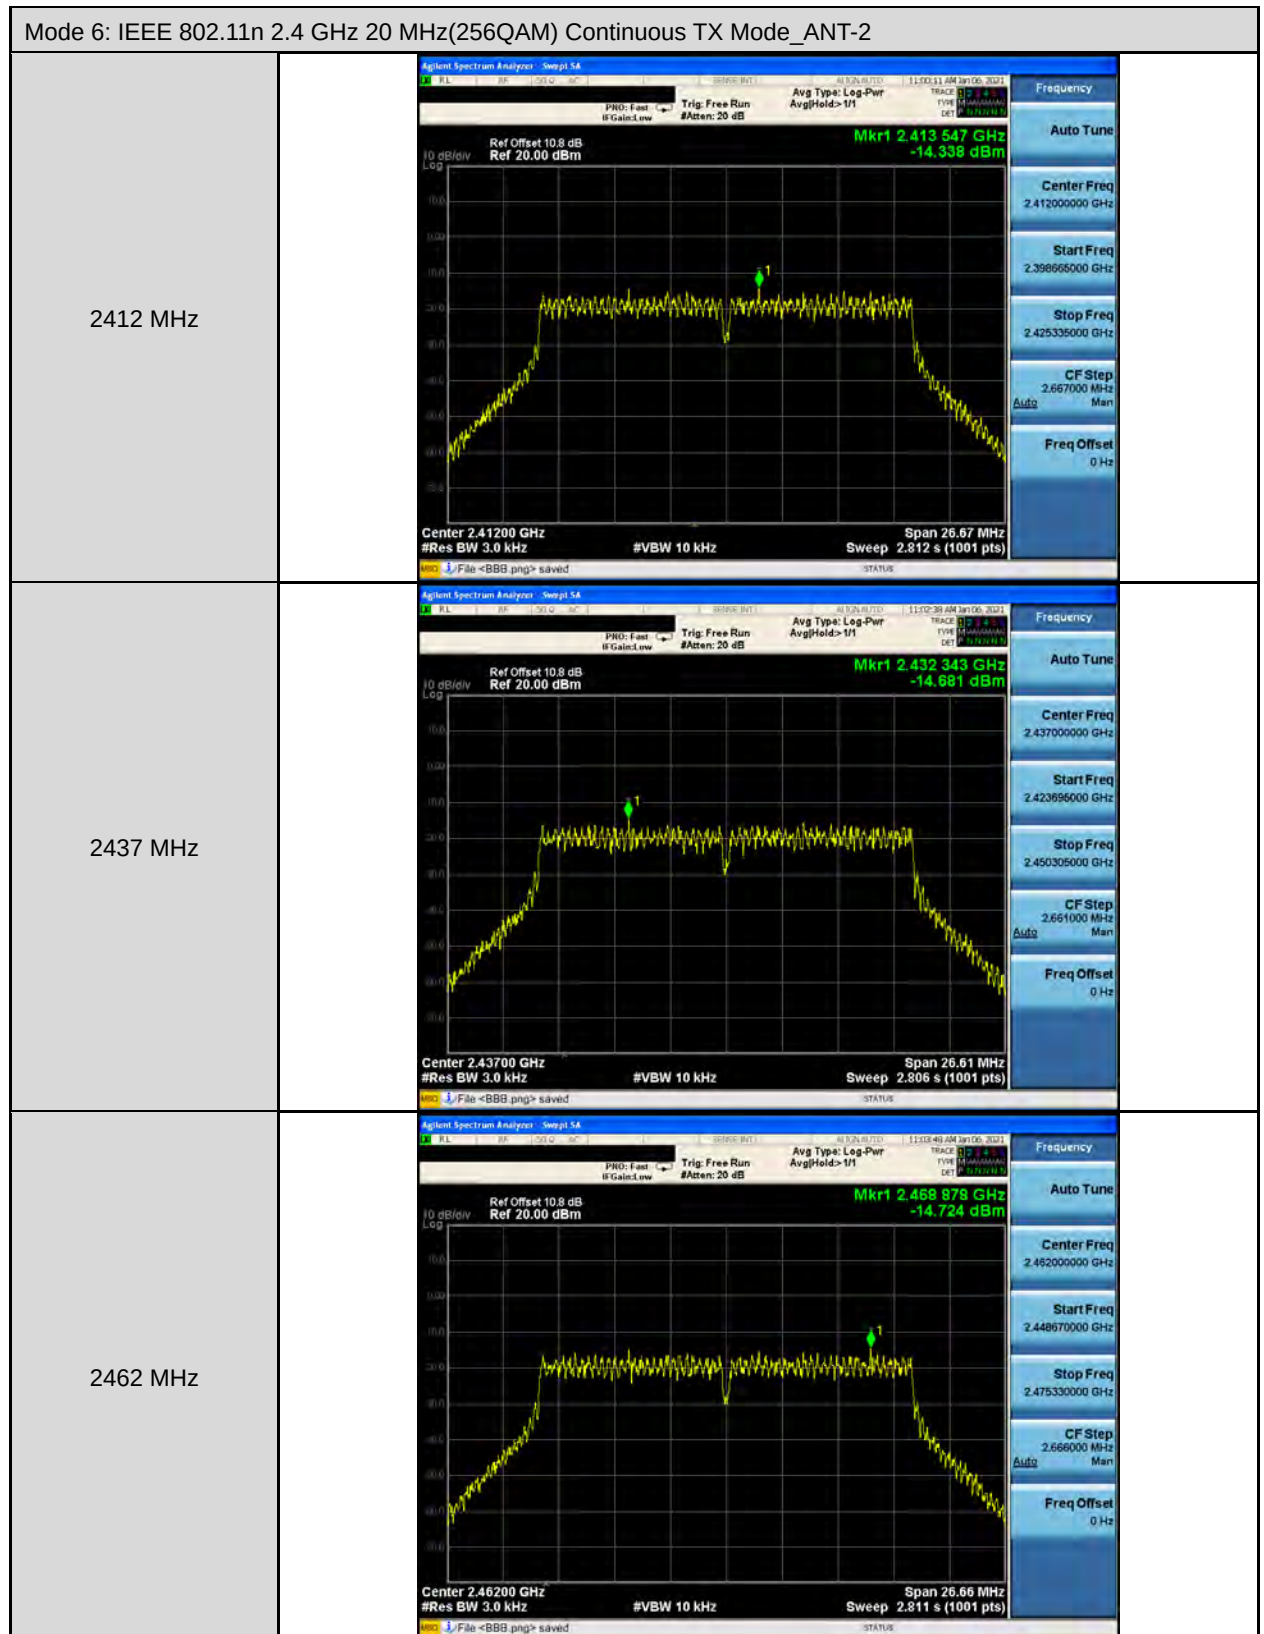


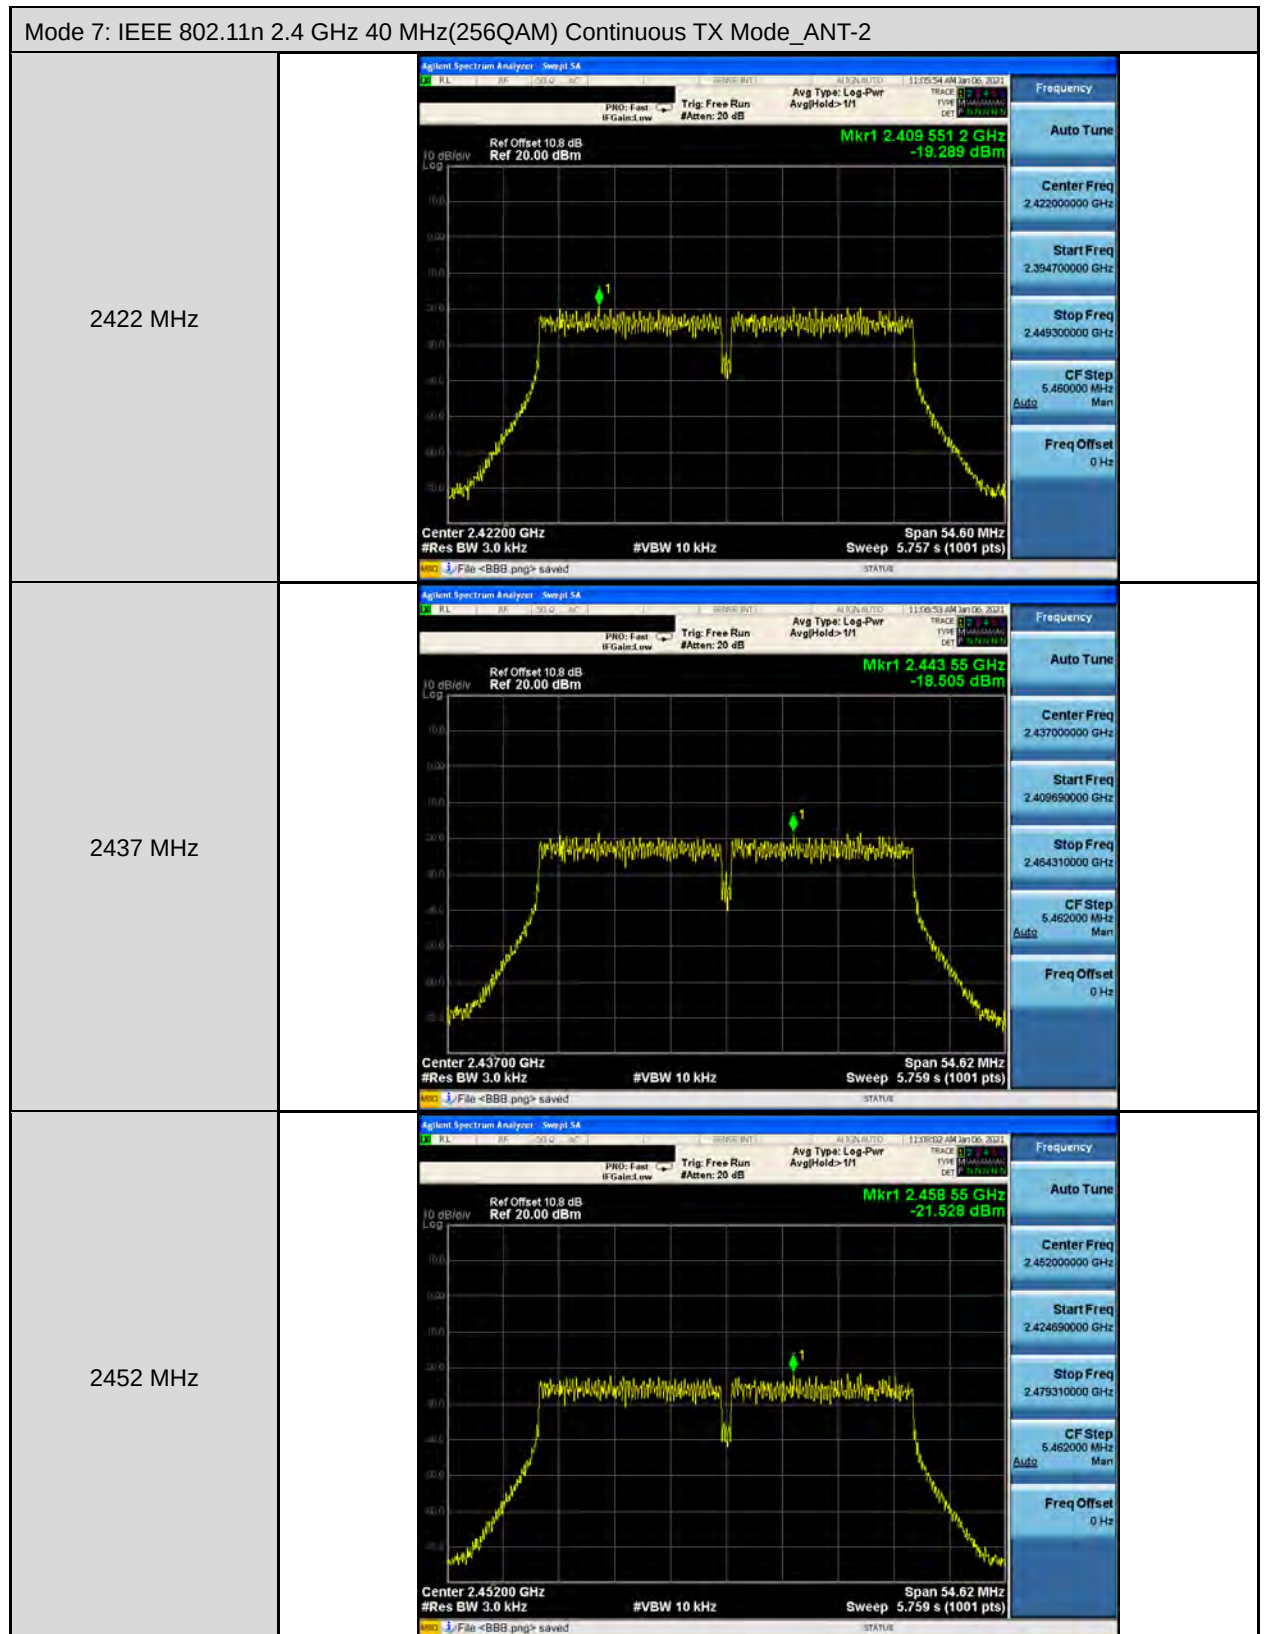


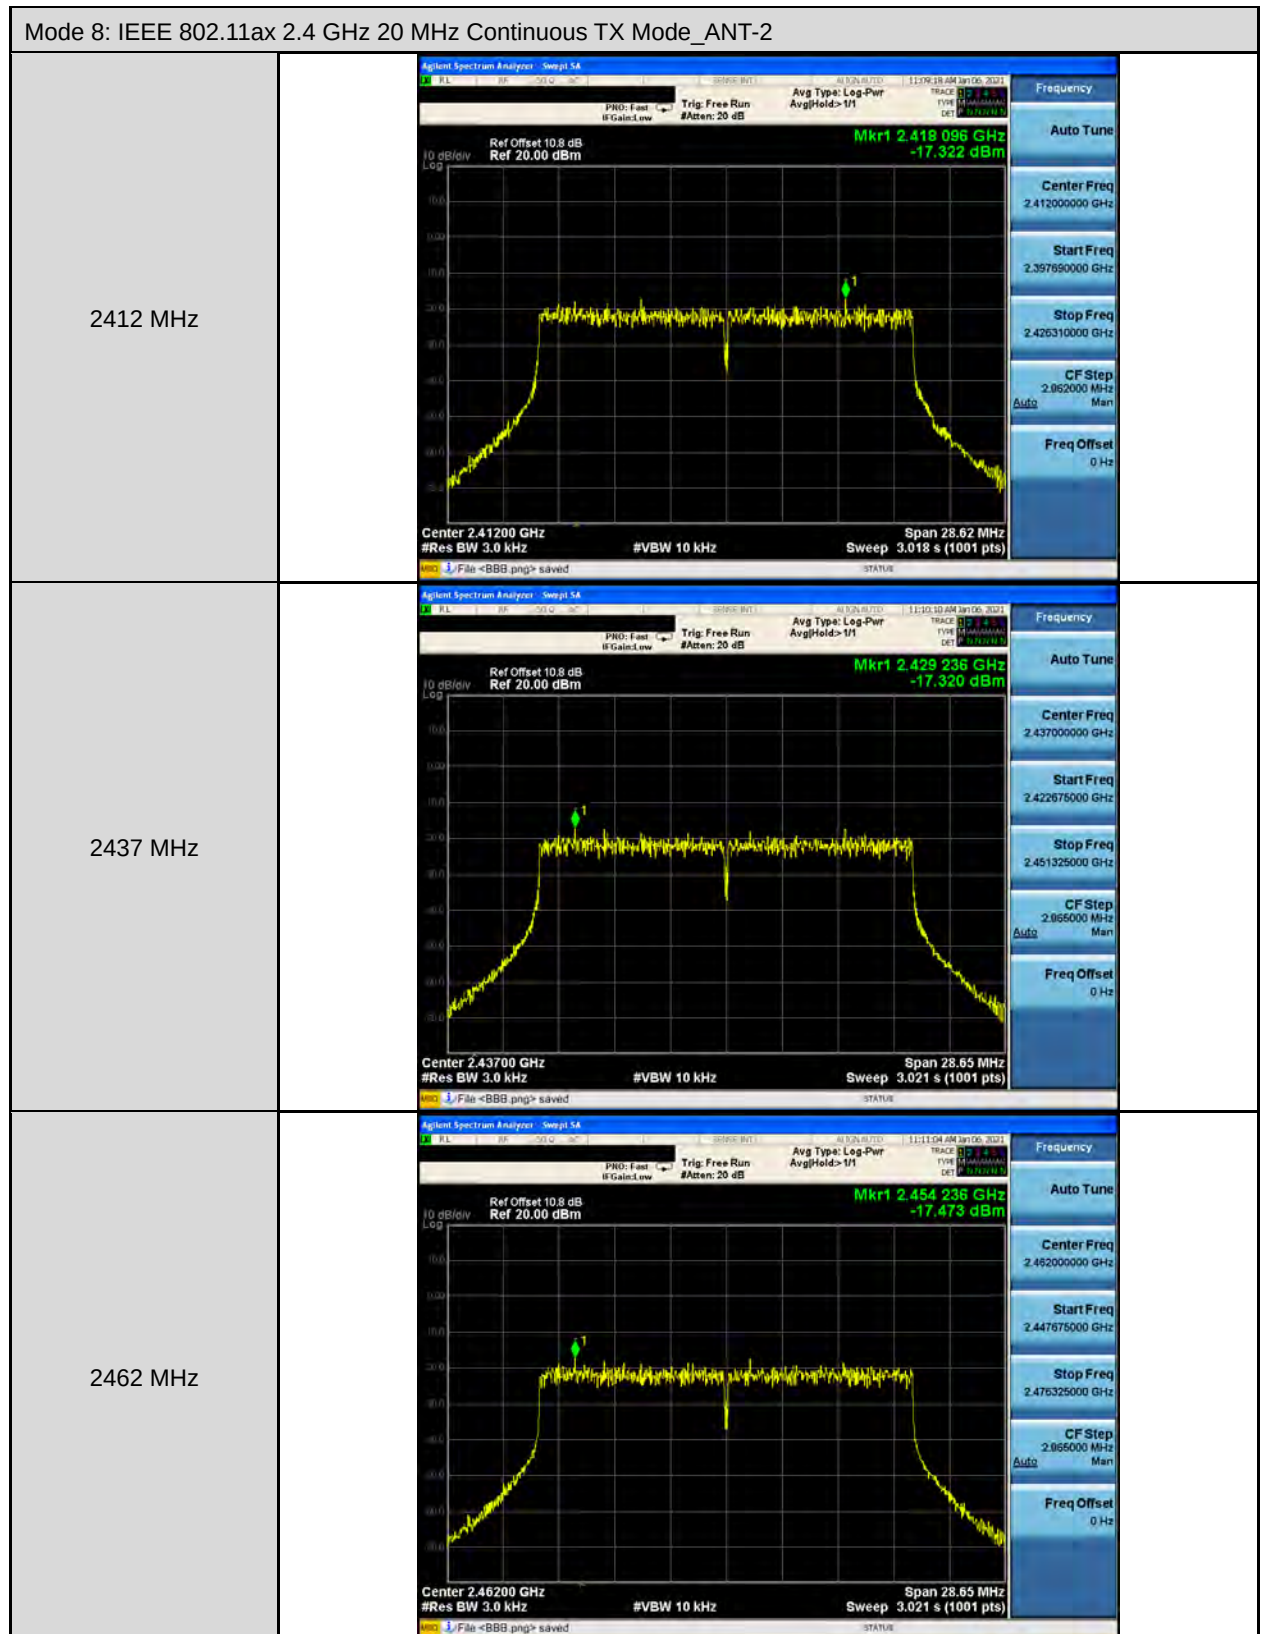


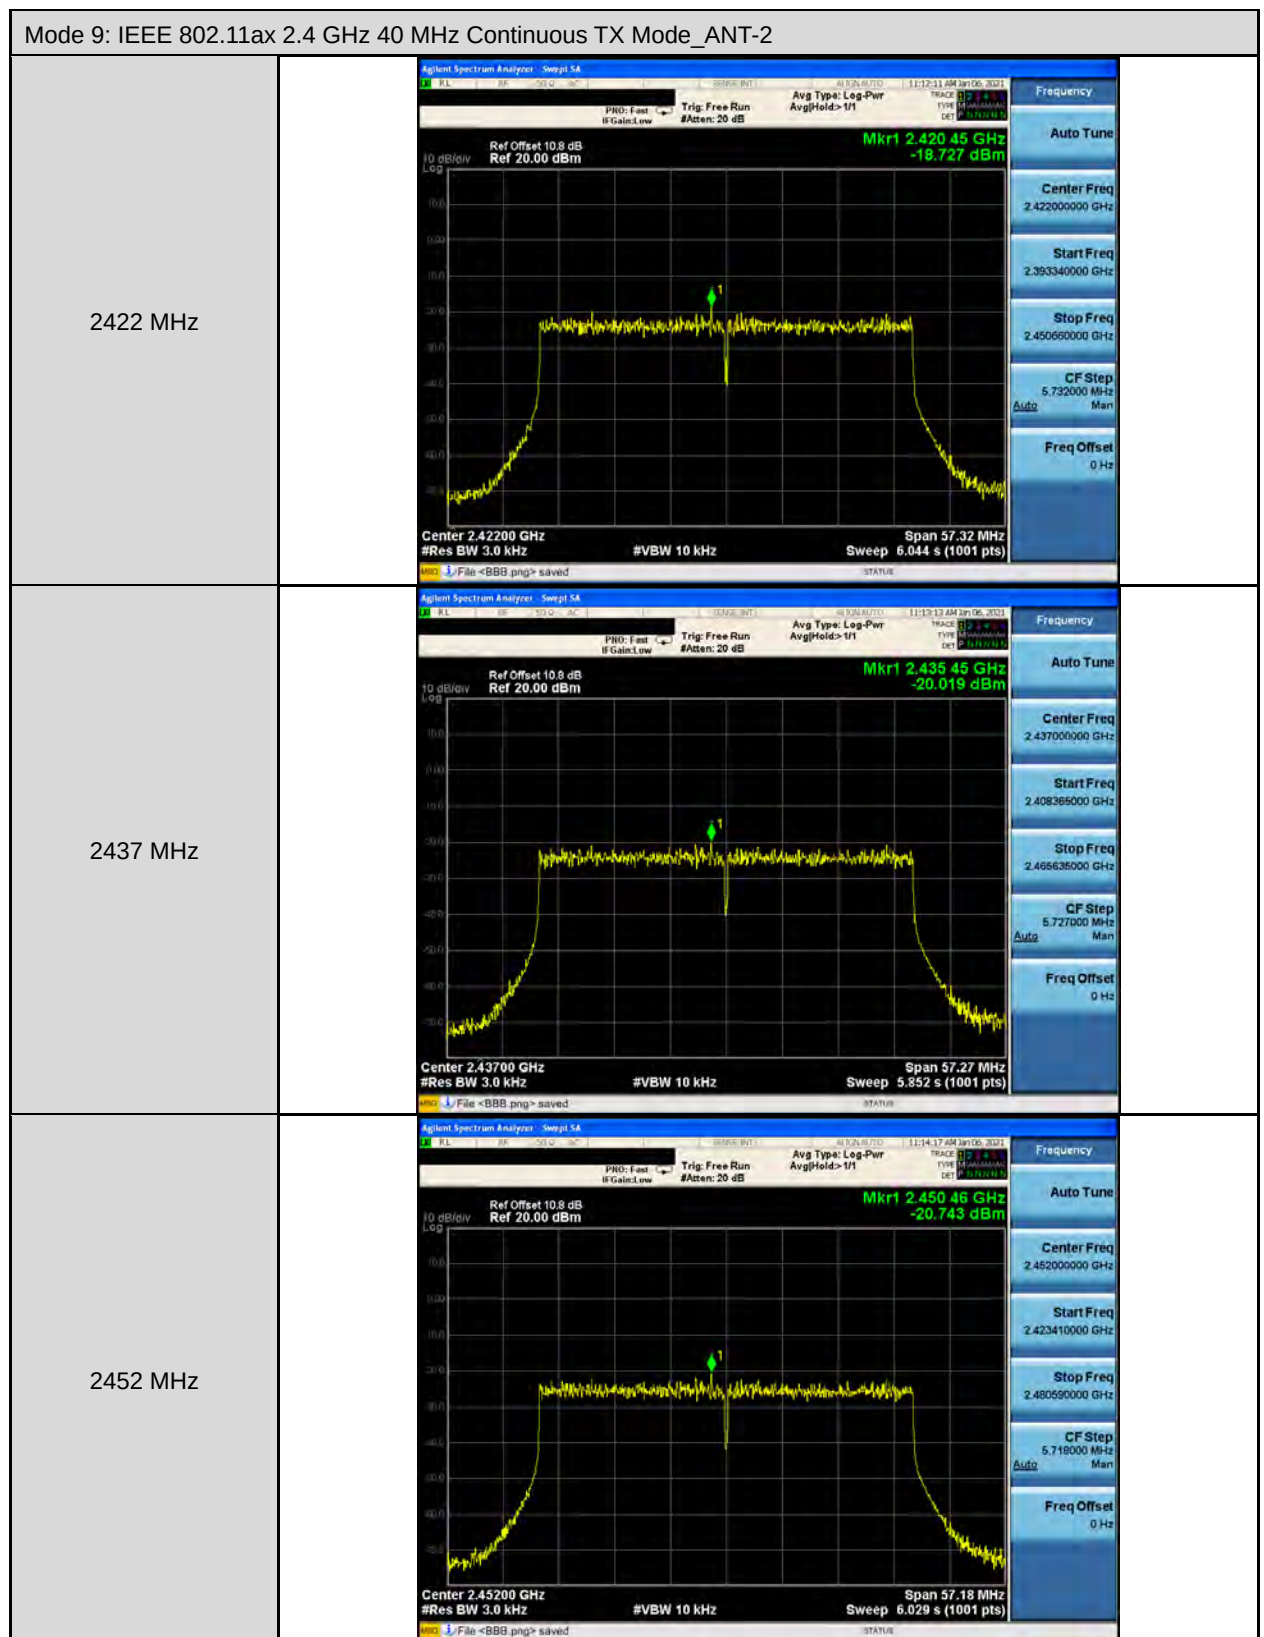

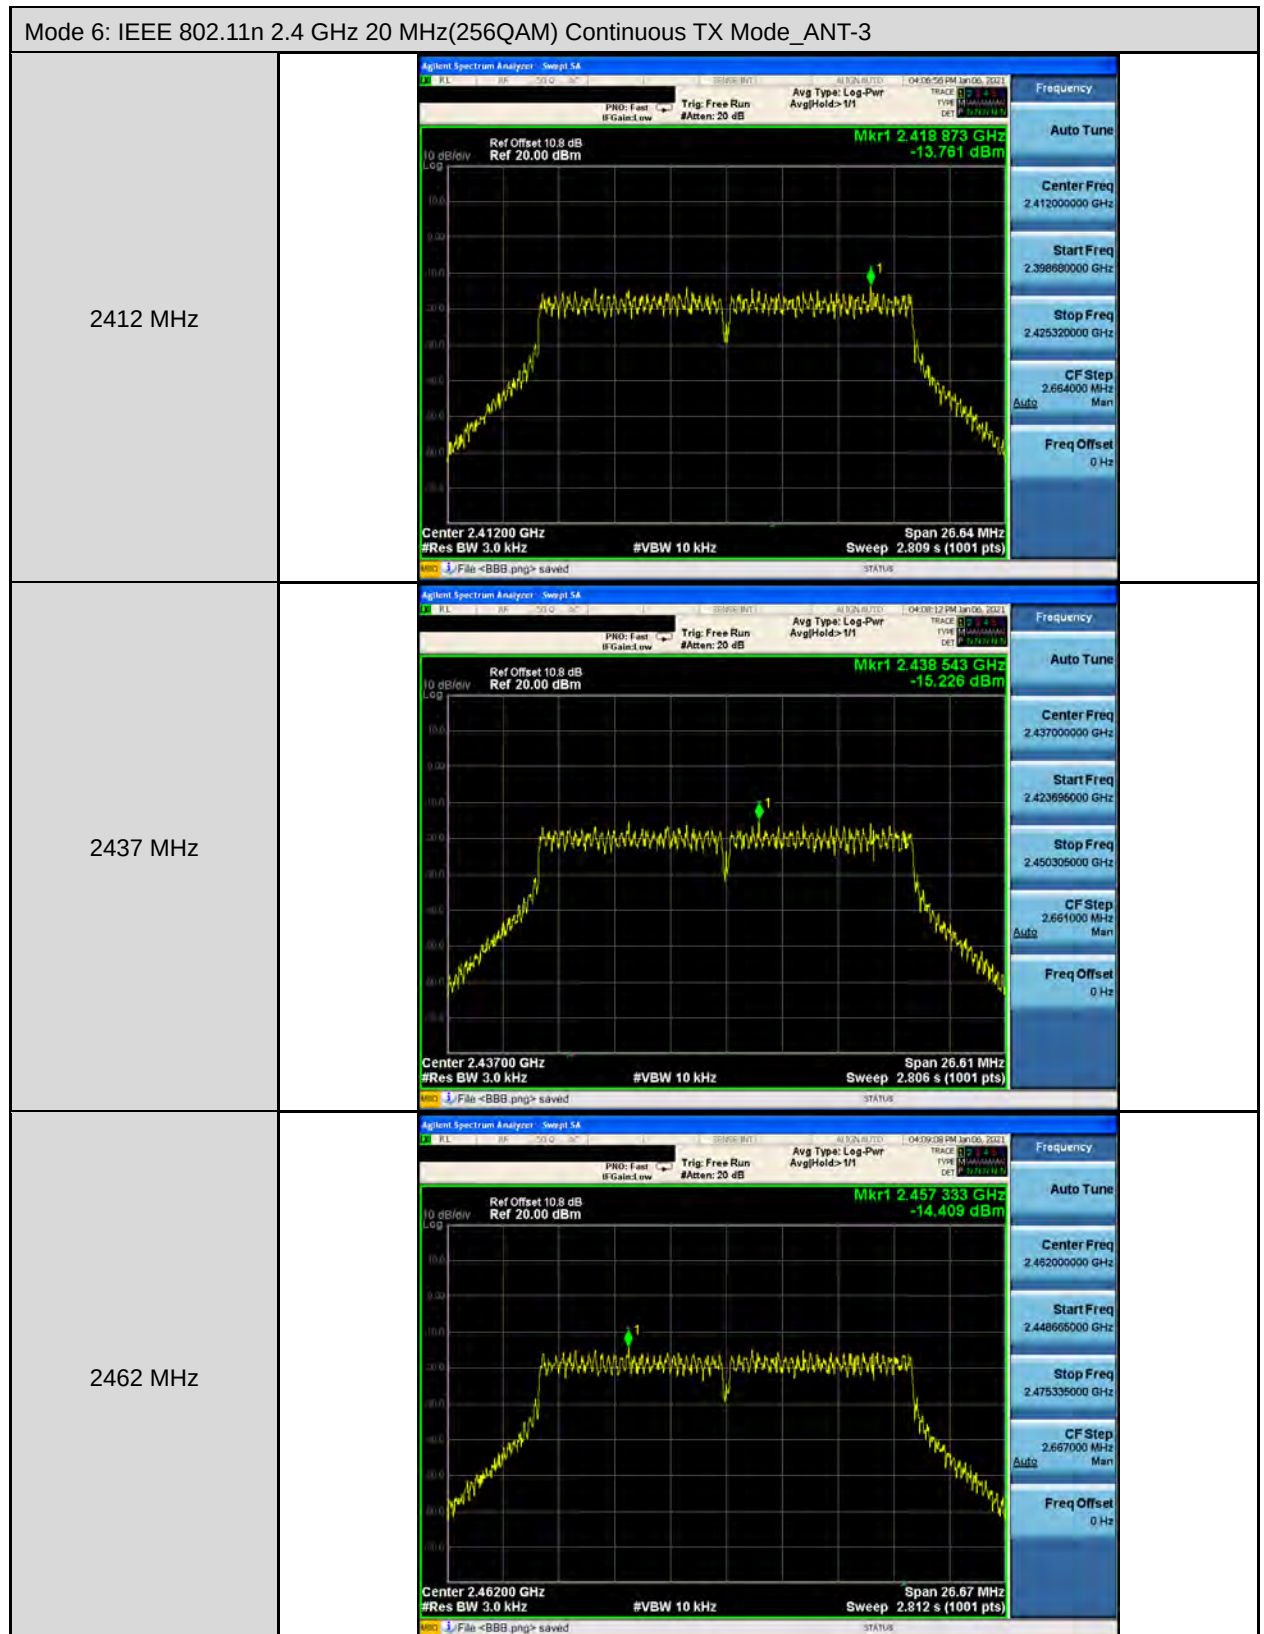

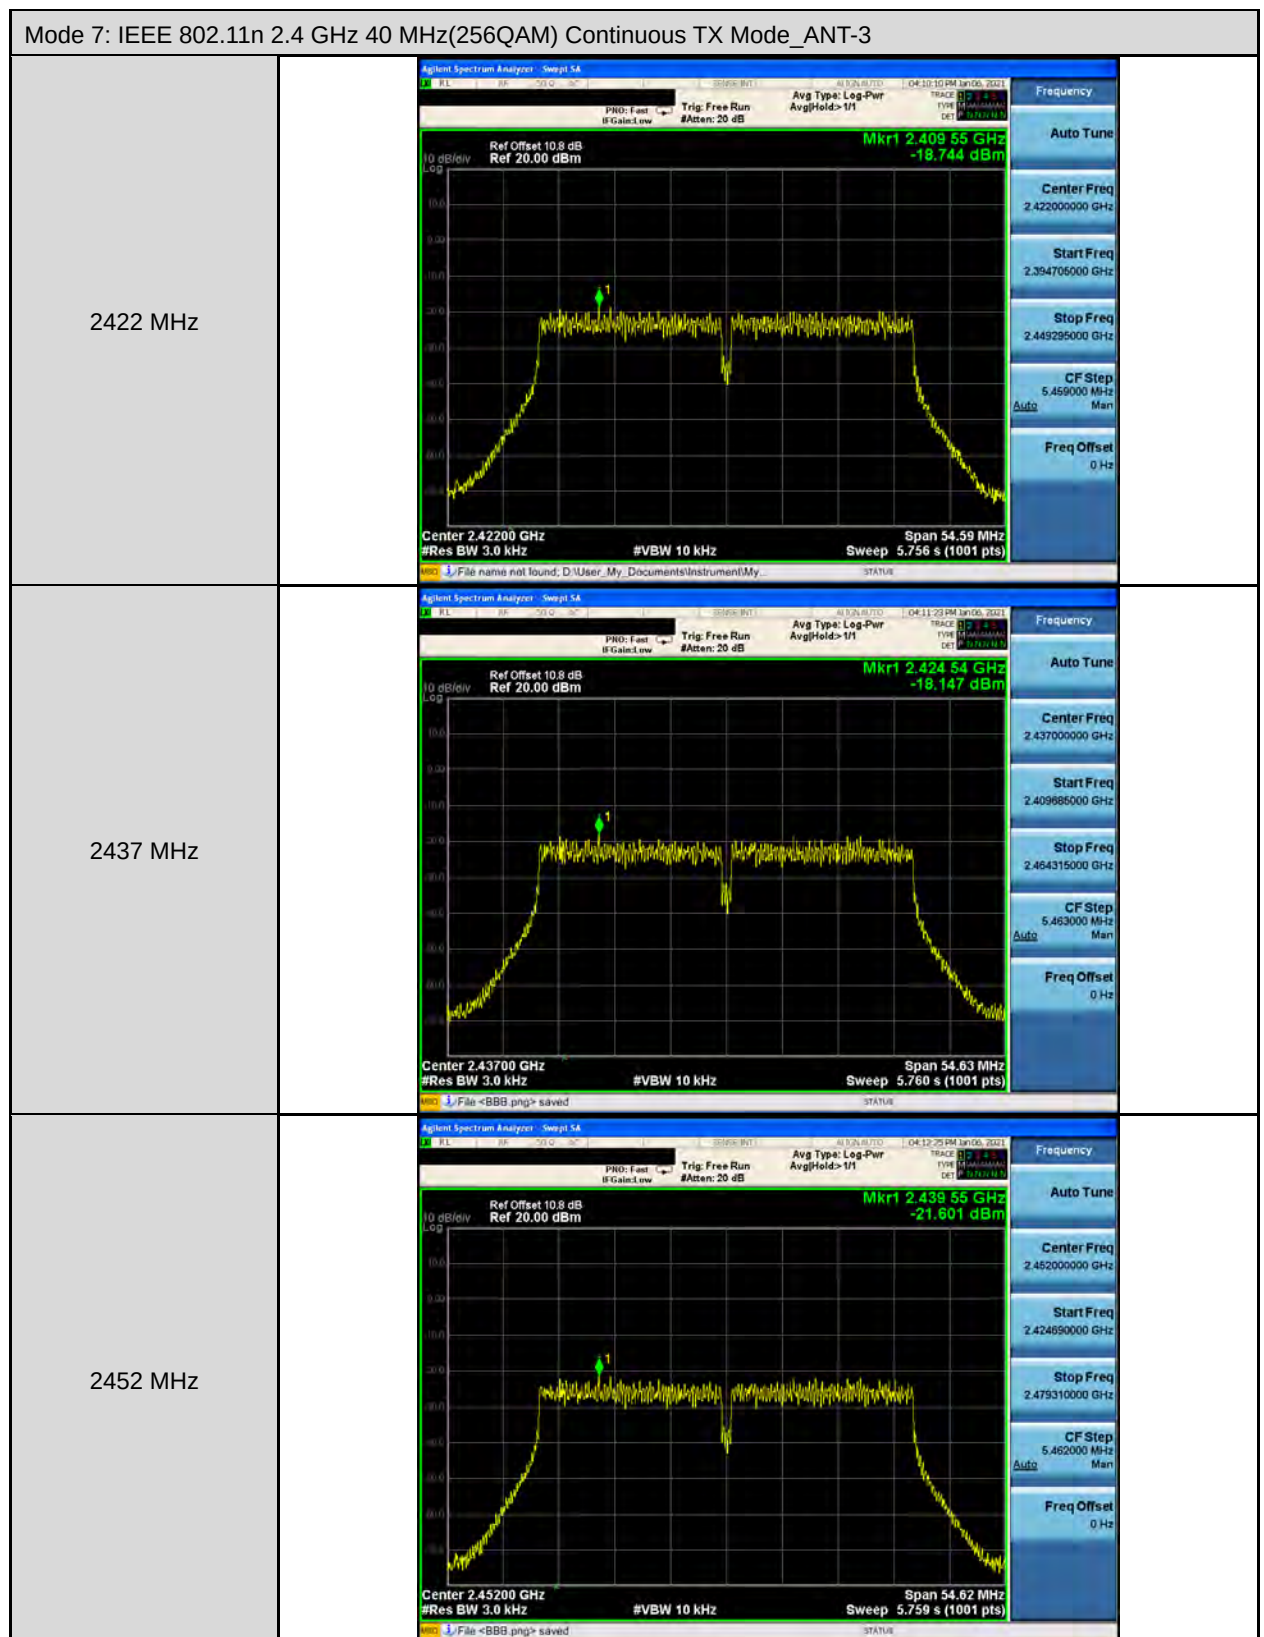

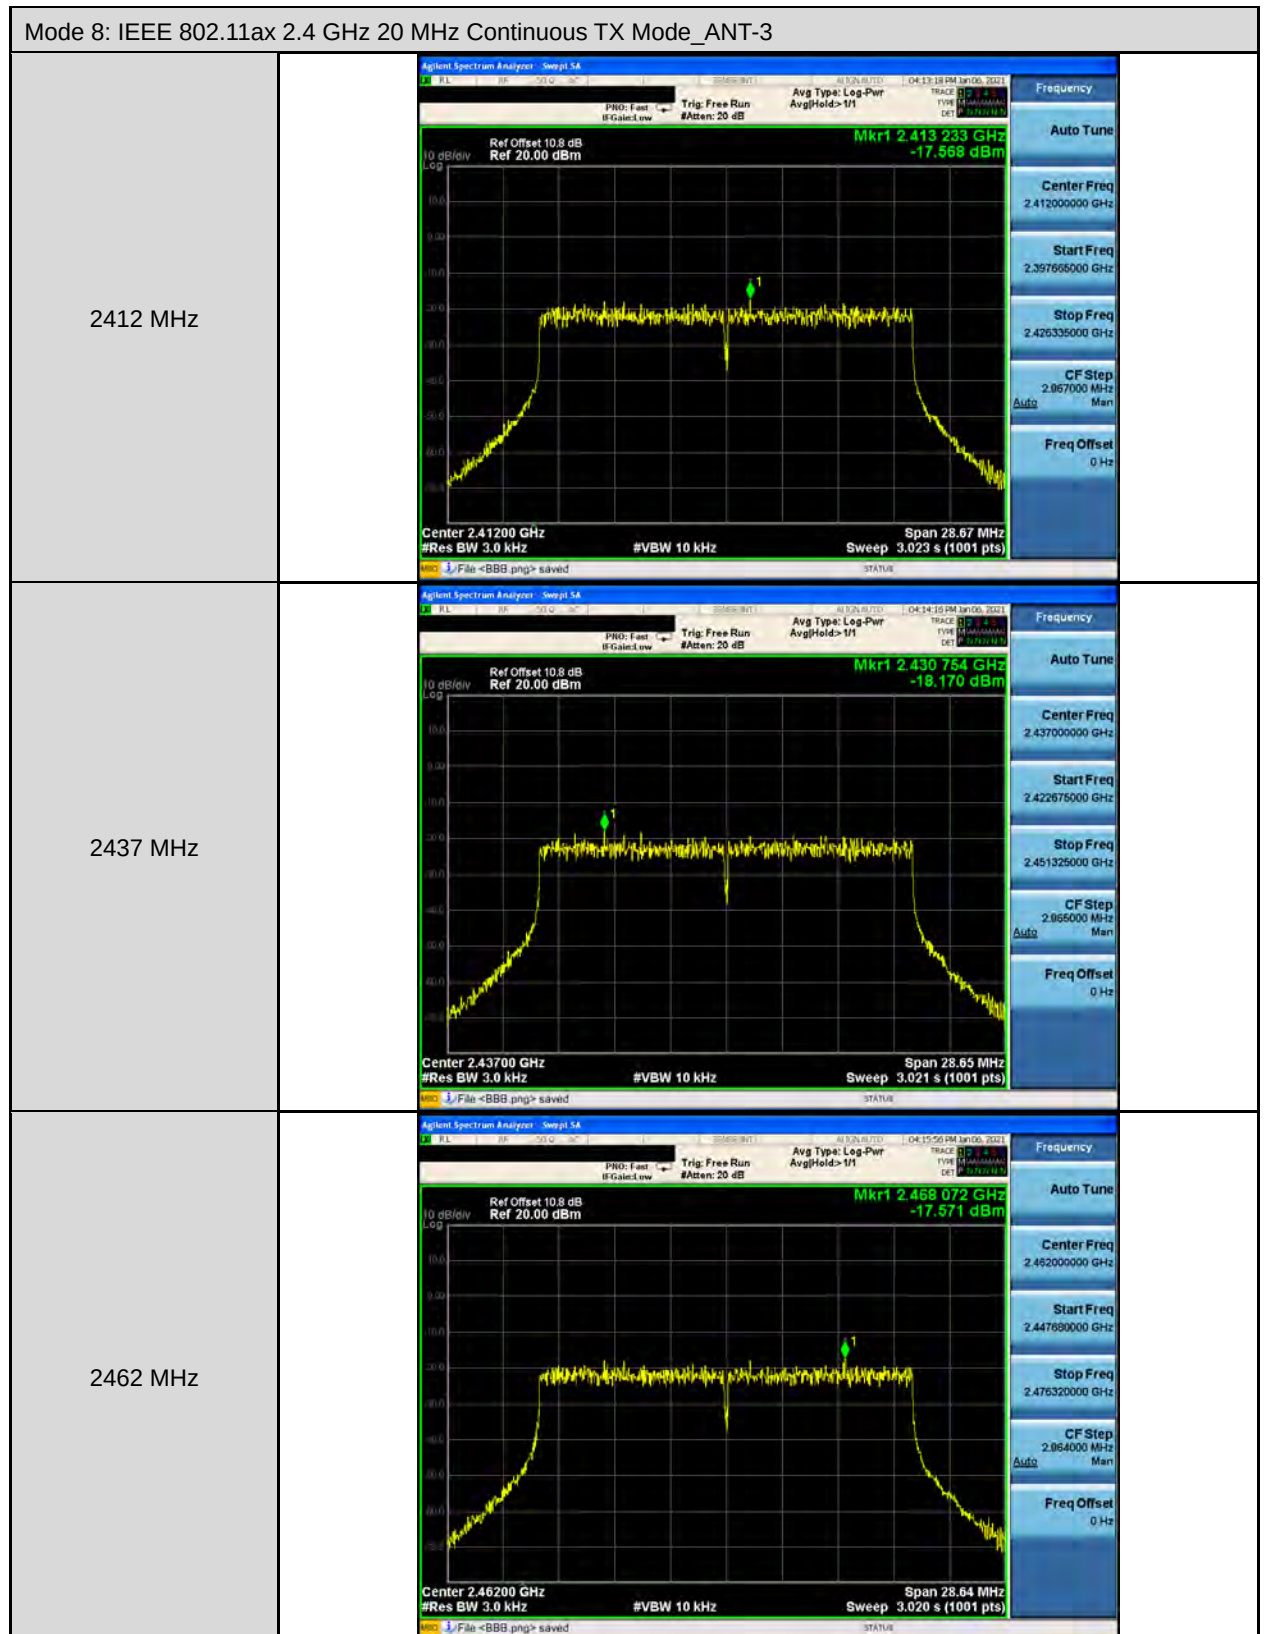


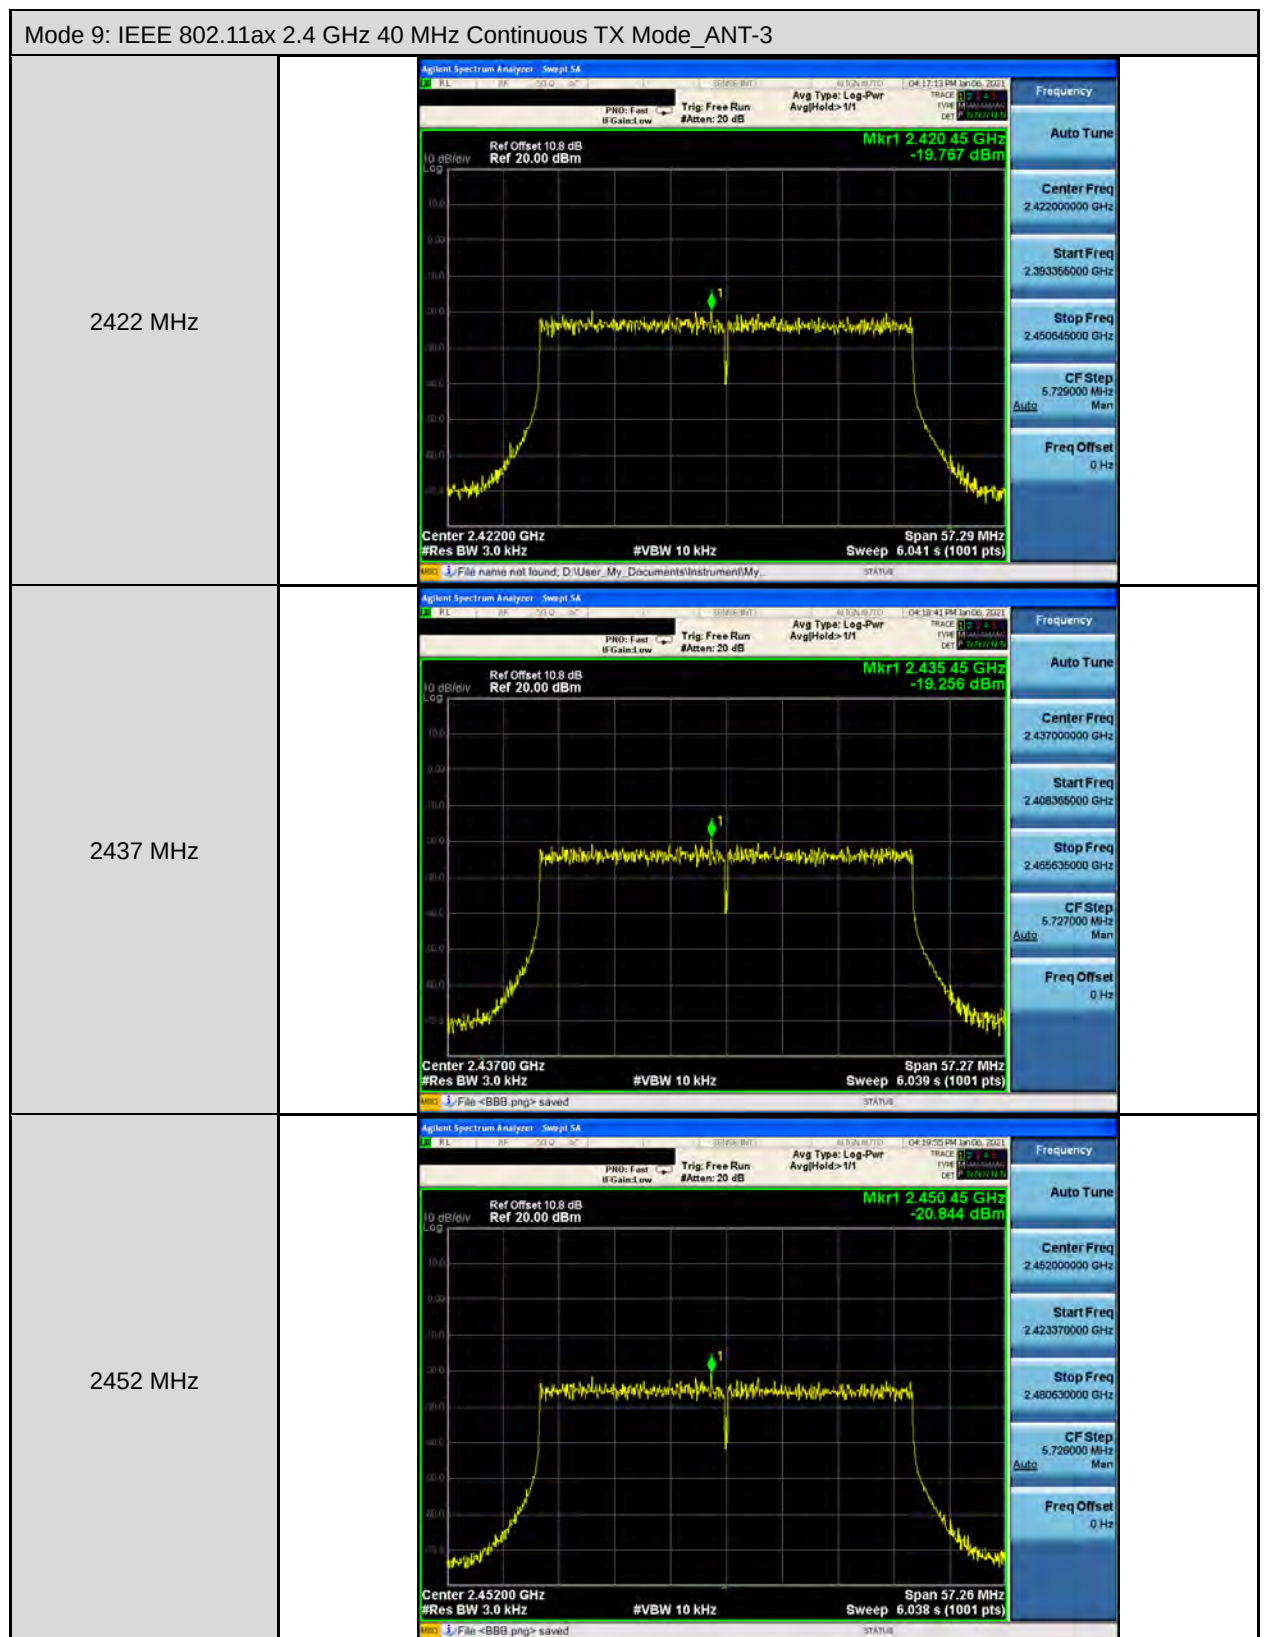

Annex D. Radiated Emission Measurement (5 GHz)

其它不必要之訊號 (1 GHz 以下)

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5825 MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

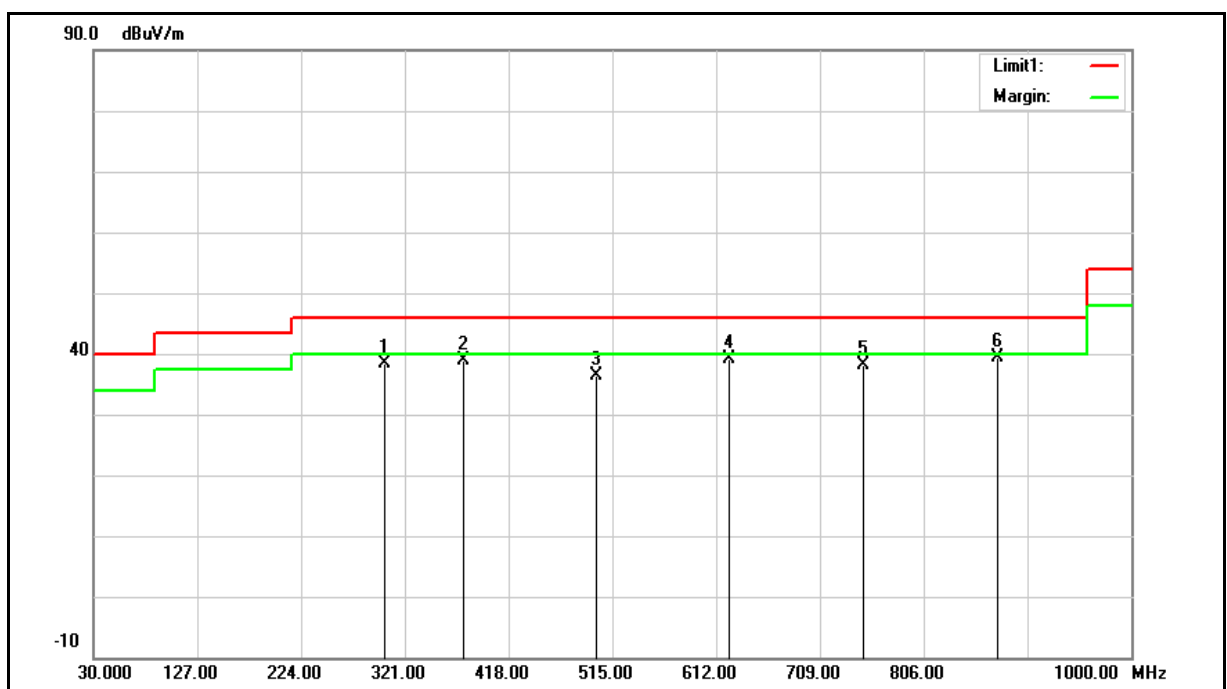

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	302.5700	62.09	-23.61	38.48	46.00	-7.52	QP
2	375.3200	60.71	-21.87	38.84	46.00	-7.16	QP
3	500.4500	55.90	-19.64	36.26	46.00	-9.74	QP
4	624.6100	55.97	-16.88	39.09	46.00	-6.91	QP
5	749.7400	53.44	-15.24	38.20	46.00	-7.80	QP
6	874.8700	53.04	-13.54	39.50	46.00	-6.50	QP


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: $38.48 = -23.61 + 62.09$

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5825 MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

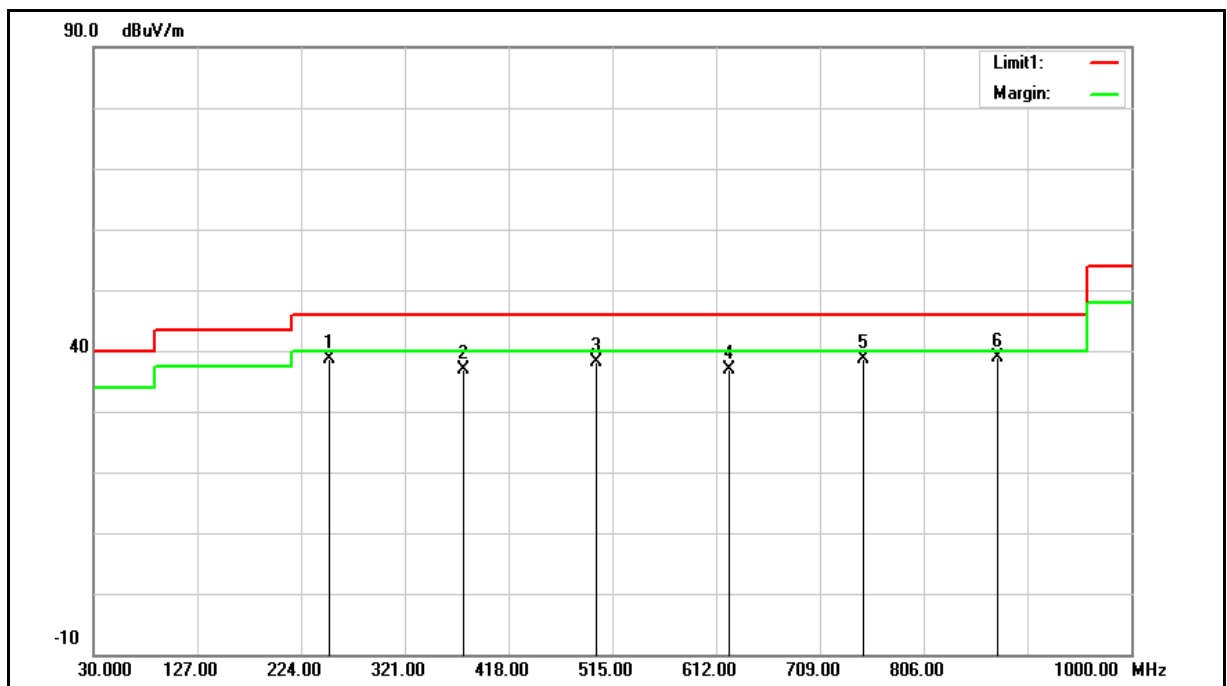

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	250.1900	64.06	-25.34	38.72	46.00	-7.28	QP
2	375.3200	58.70	-21.87	36.83	46.00	-9.17	QP
3	500.4500	57.72	-19.64	38.08	46.00	-7.92	QP
4	624.6100	53.83	-16.88	36.95	46.00	-9.05	QP
5	749.7400	53.85	-15.24	38.61	46.00	-7.39	QP
6	874.8700	52.46	-13.54	38.92	46.00	-7.08	QP


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: $38.72 = -25.34 + 64.06$

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5785 MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

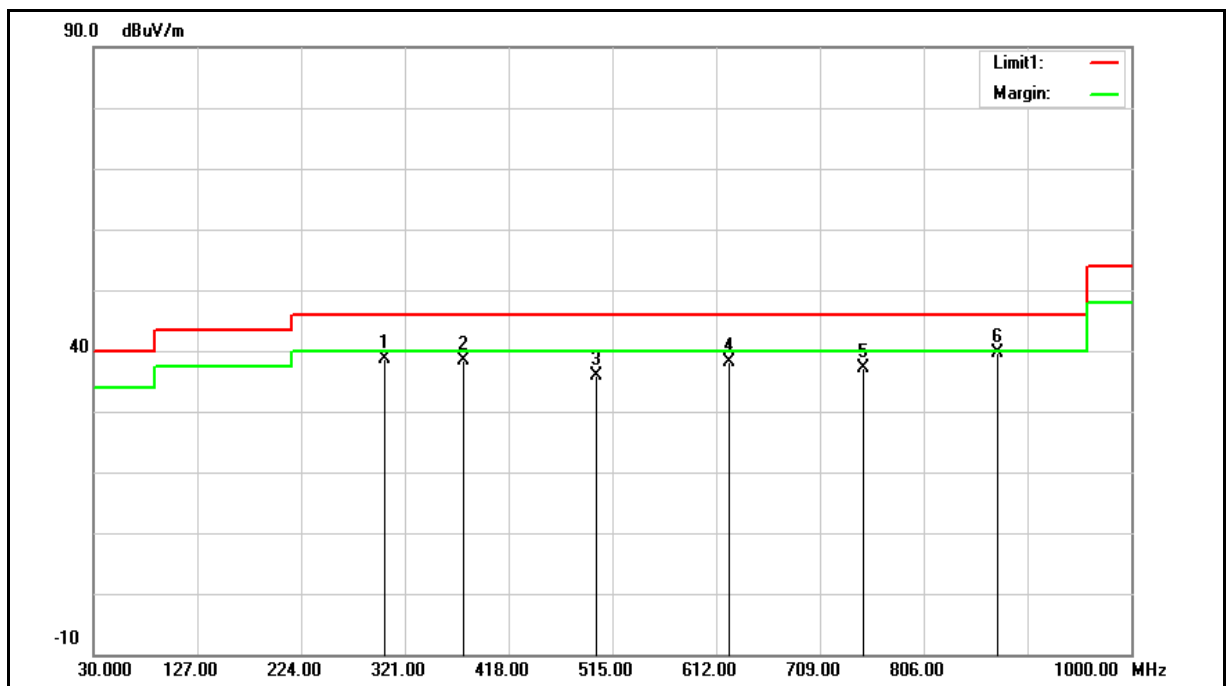


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	302.5700	62.32	-23.61	38.71	46.00	-7.29	QP
2	375.3200	60.33	-21.87	38.46	46.00	-7.54	QP
3	500.4500	55.42	-19.64	35.78	46.00	-10.22	QP
4	624.6100	54.91	-16.88	38.03	46.00	-7.97	QP
5	749.7400	52.48	-15.24	37.24	46.00	-8.76	QP
6	874.8700	53.29	-13.54	39.75	46.00	-6.25	QP

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5785 MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

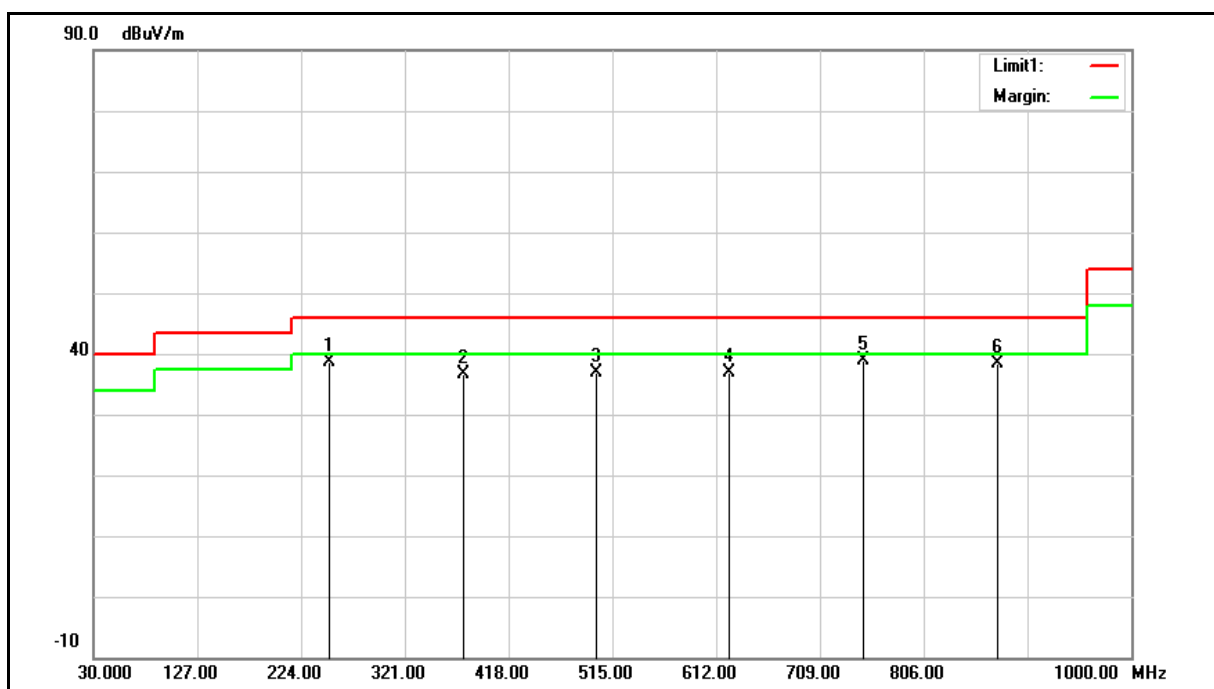

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	250.1900	63.93	-25.34	38.59	46.00	-7.41	QP
2	375.3200	58.62	-21.87	36.75	46.00	-9.25	QP
3	500.4500	56.49	-19.64	36.85	46.00	-9.15	QP
4	624.6100	53.83	-16.88	36.95	46.00	-9.05	QP
5	749.7400	54.00	-15.24	38.76	46.00	-7.24	QP
6	874.8700	51.83	-13.54	38.29	46.00	-7.71	QP


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

場強輻射量測 (1 GHz 以上)

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

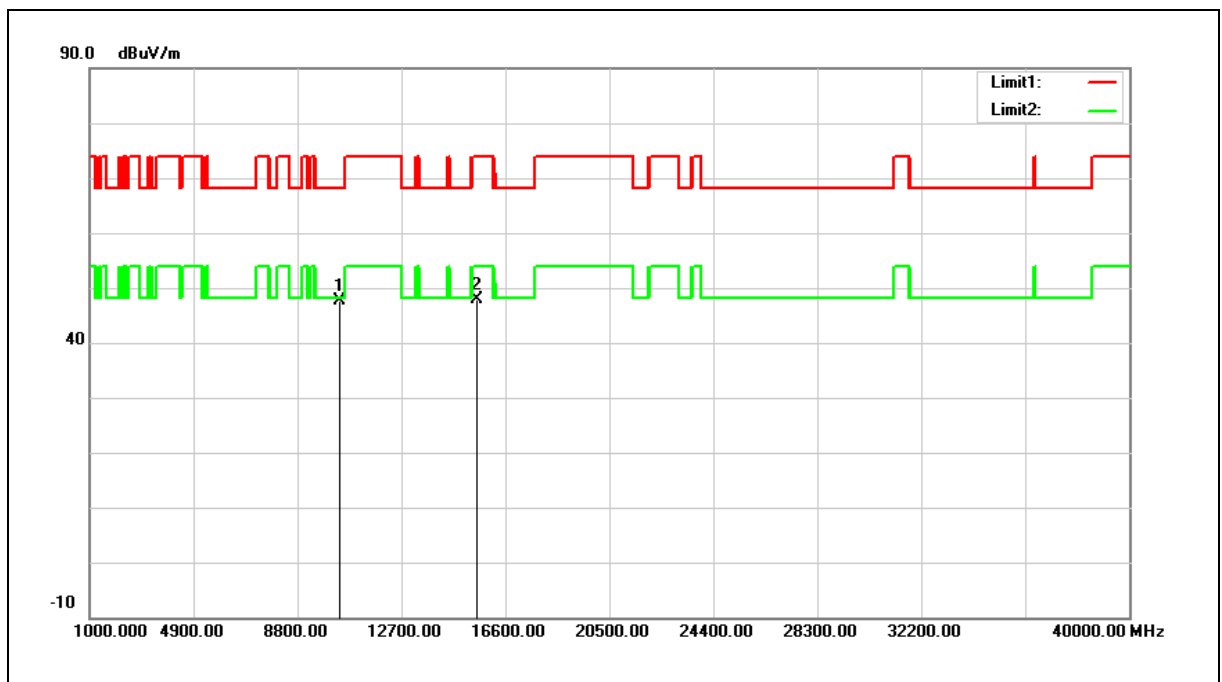

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	35.84	11.69	47.53	68.20	-20.67	peak
2	15540.000	33.41	14.52	47.93	74.00	-26.07	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 47.53 = 11.69 +35.84

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

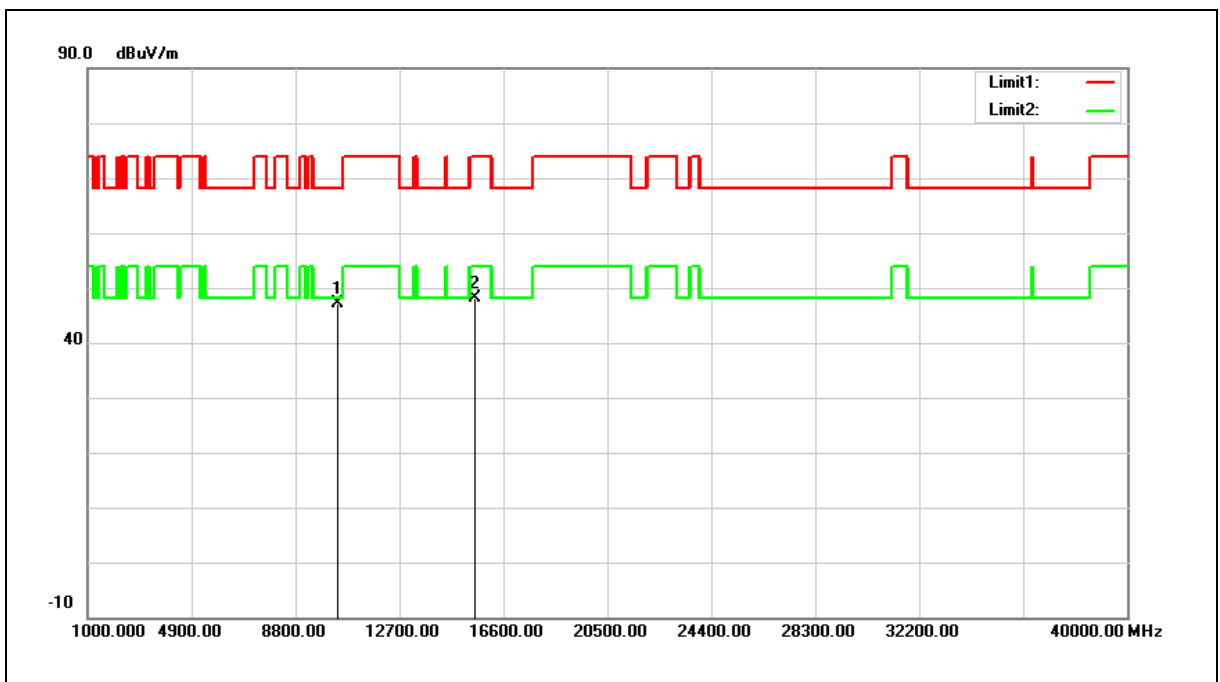

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	35.55	11.69	47.24	68.20	-20.96	peak
2	15540.000	33.62	14.52	48.14	74.00	-25.86	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 47.24 = 11.69 +35.55

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

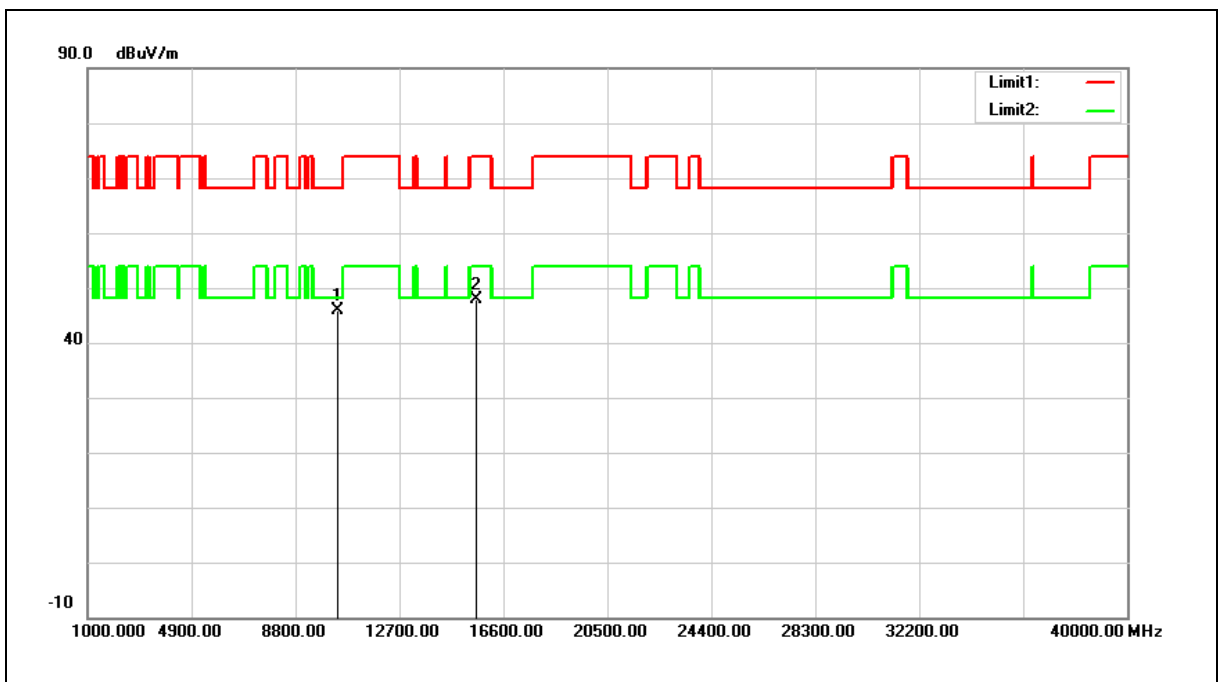


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	34.21	11.79	46.00	68.20	-22.20	peak
2	15600.000	33.51	14.39	47.90	74.00	-26.10	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

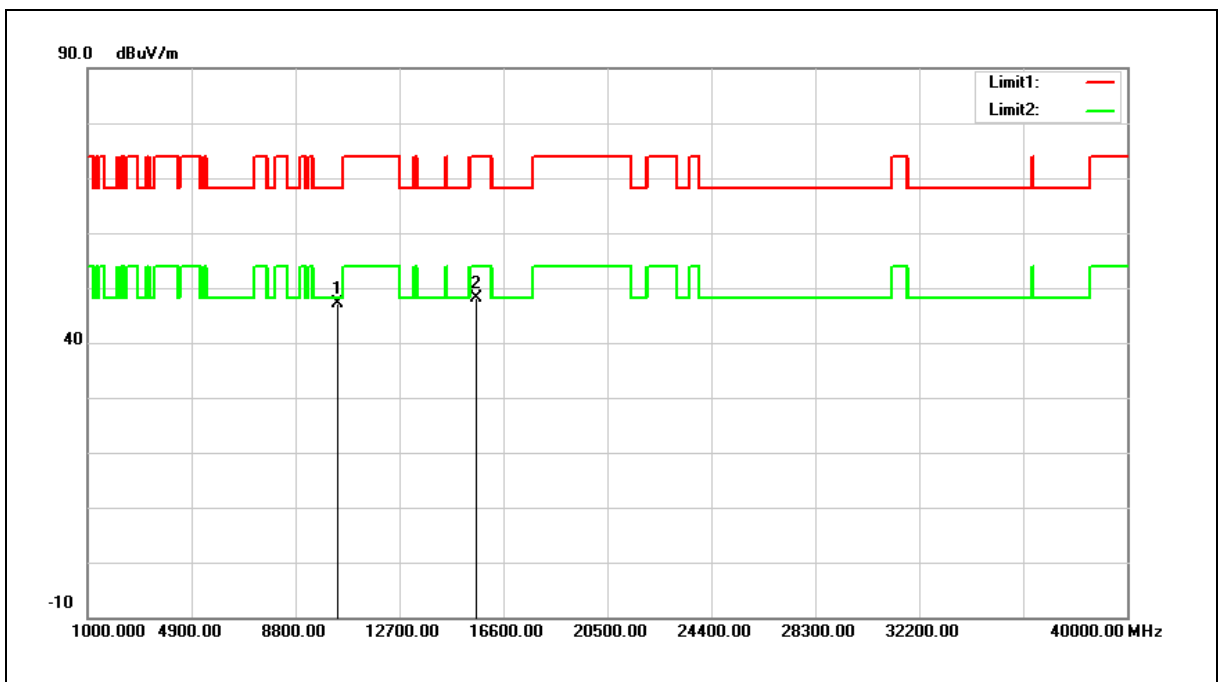


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	35.43	11.79	47.22	68.20	-20.98	peak
2	15600.000	33.64	14.39	48.03	74.00	-25.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

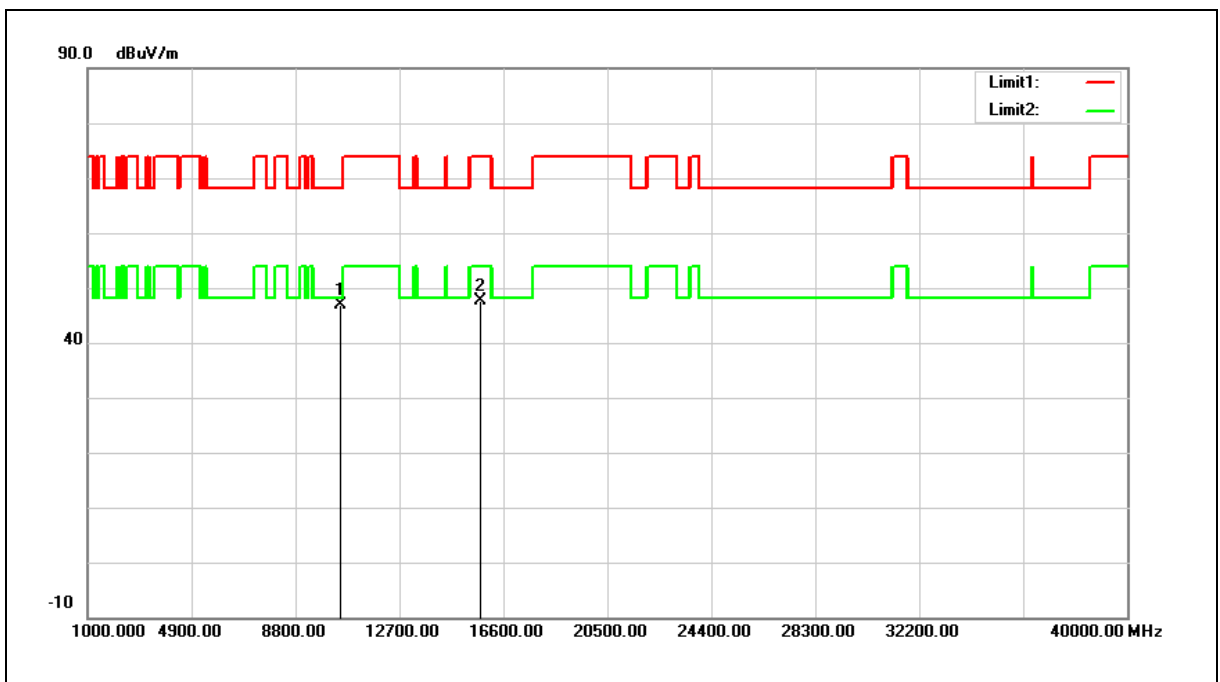


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	34.79	12.00	46.79	68.20	-21.41	peak
2	15720.000	33.54	14.13	47.67	74.00	-26.33	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

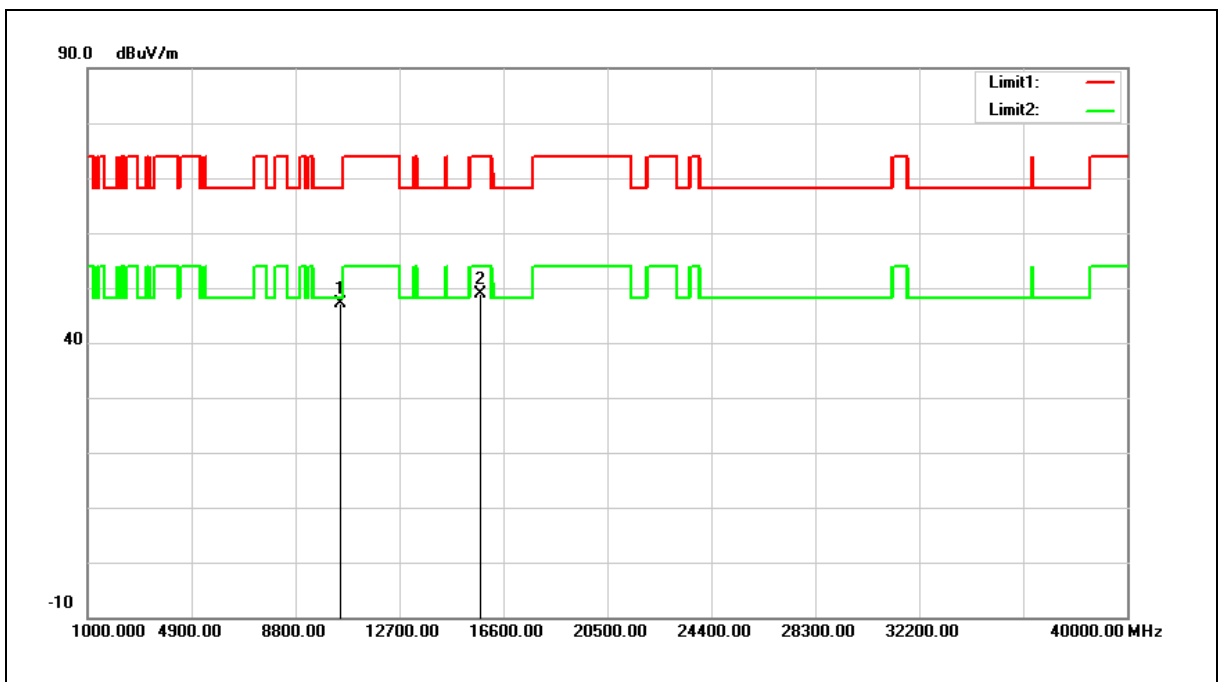


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	35.19	12.00	47.19	68.20	-21.01	peak
2	15720.000	34.64	14.13	48.77	74.00	-25.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

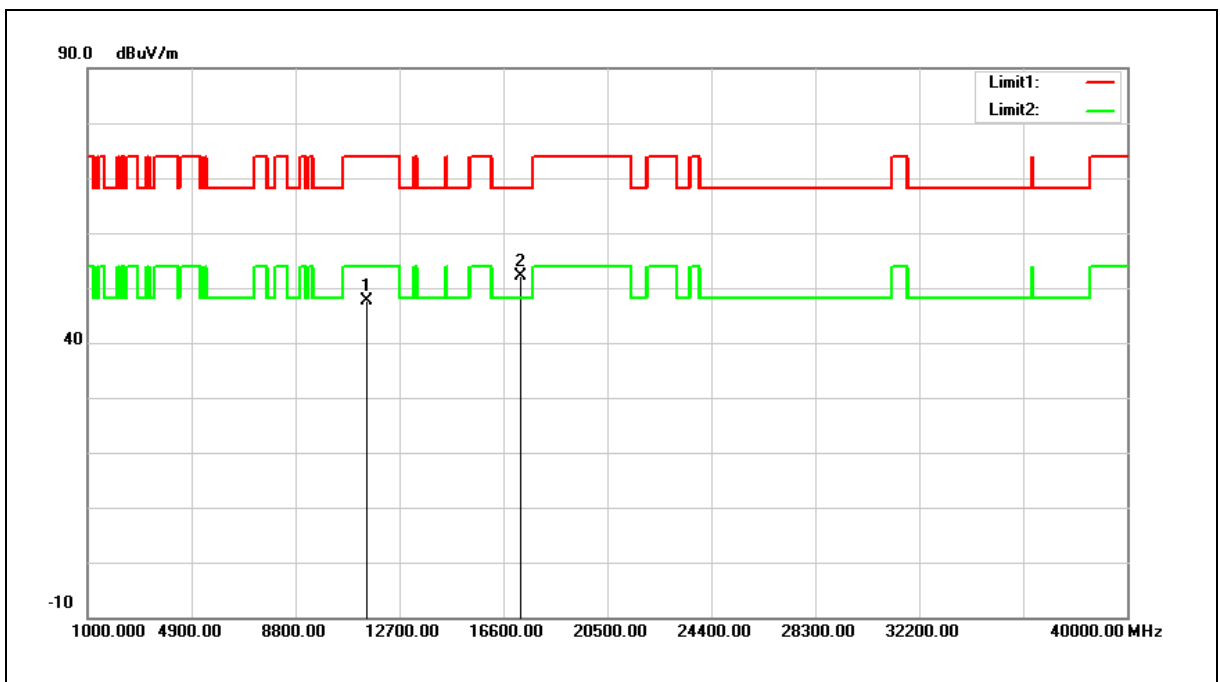


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	34.87	12.68	47.55	74.00	-26.45	peak
2	17235.000	33.51	18.52	52.03	68.20	-16.17	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

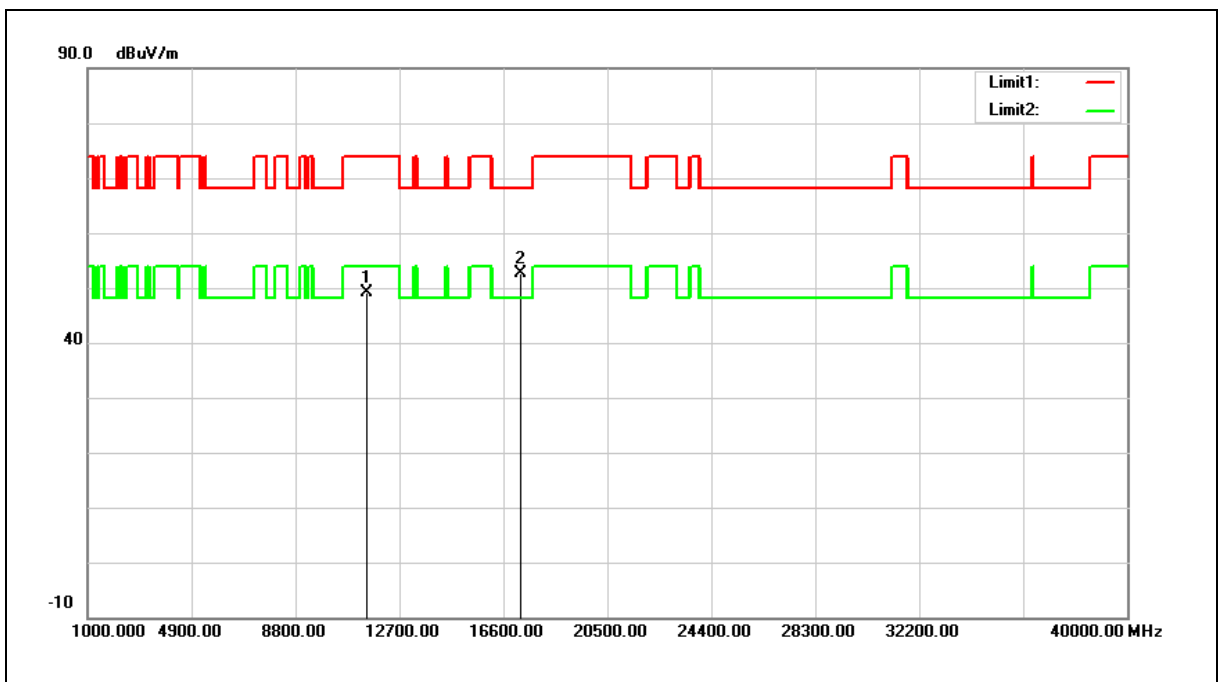


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	36.38	12.68	49.06	74.00	-24.94	peak
2	17235.000	34.04	18.52	52.56	68.20	-15.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

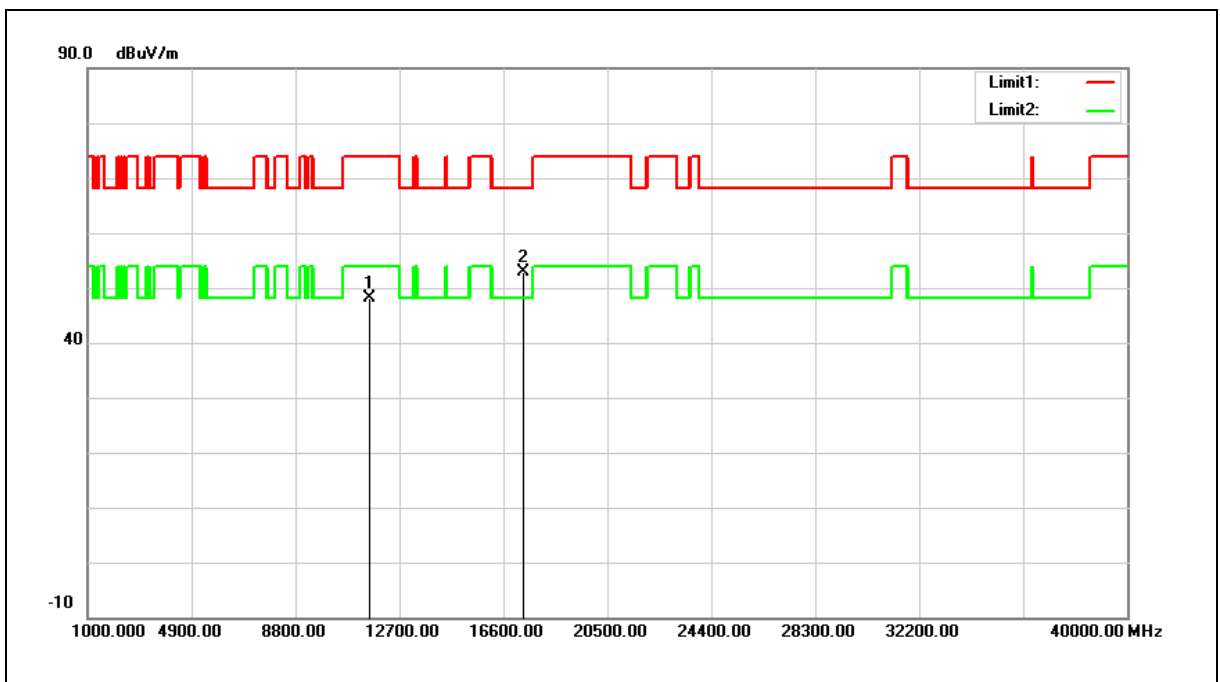


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.64	12.59	48.23	74.00	-25.77	peak
2	17355.000	33.66	19.32	52.98	68.20	-15.22	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

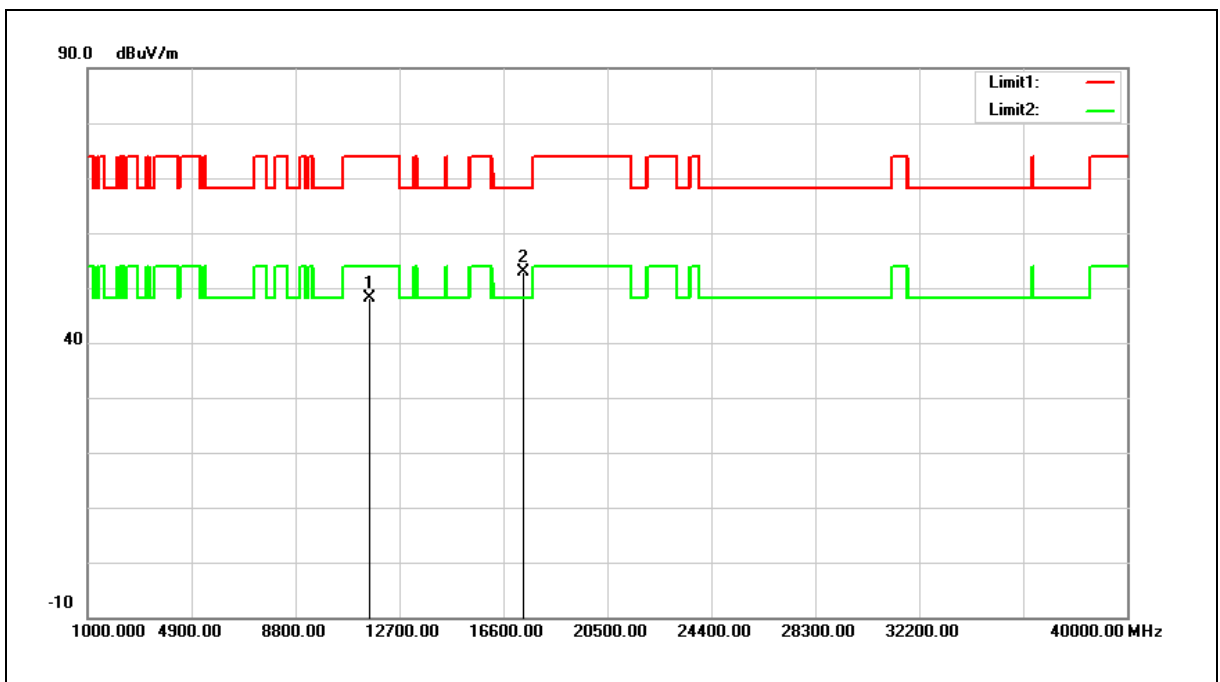


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.51	12.59	48.10	74.00	-25.90	peak
2	17355.000	33.62	19.32	52.94	68.20	-15.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

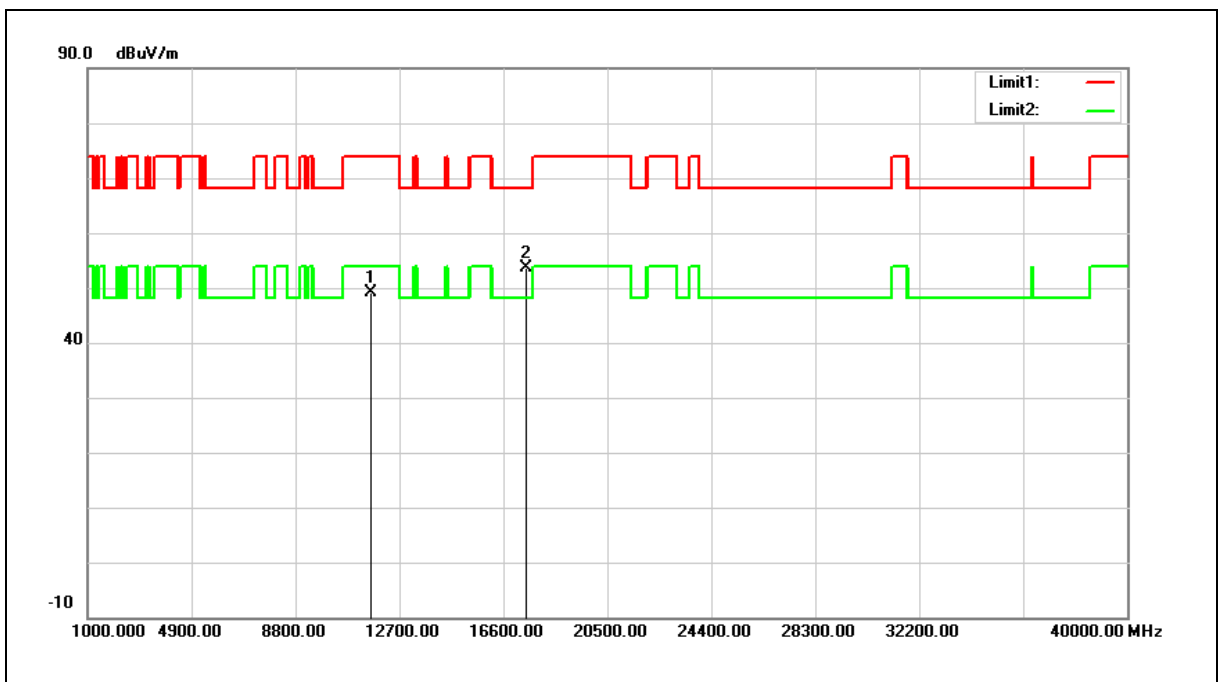


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	36.61	12.48	49.09	74.00	-24.91	peak
2	17475.000	33.50	20.13	53.63	68.20	-14.57	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

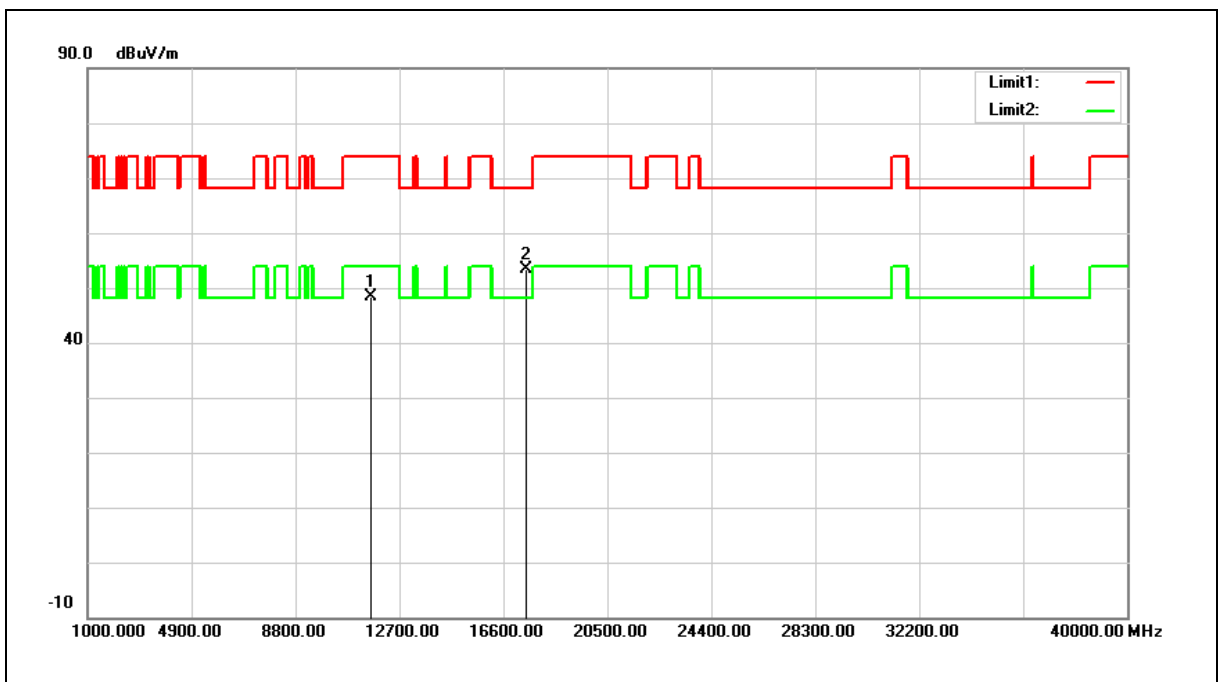


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.99	12.48	48.47	74.00	-25.53	peak
2	17475.000	33.17	20.13	53.30	68.20	-14.90	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

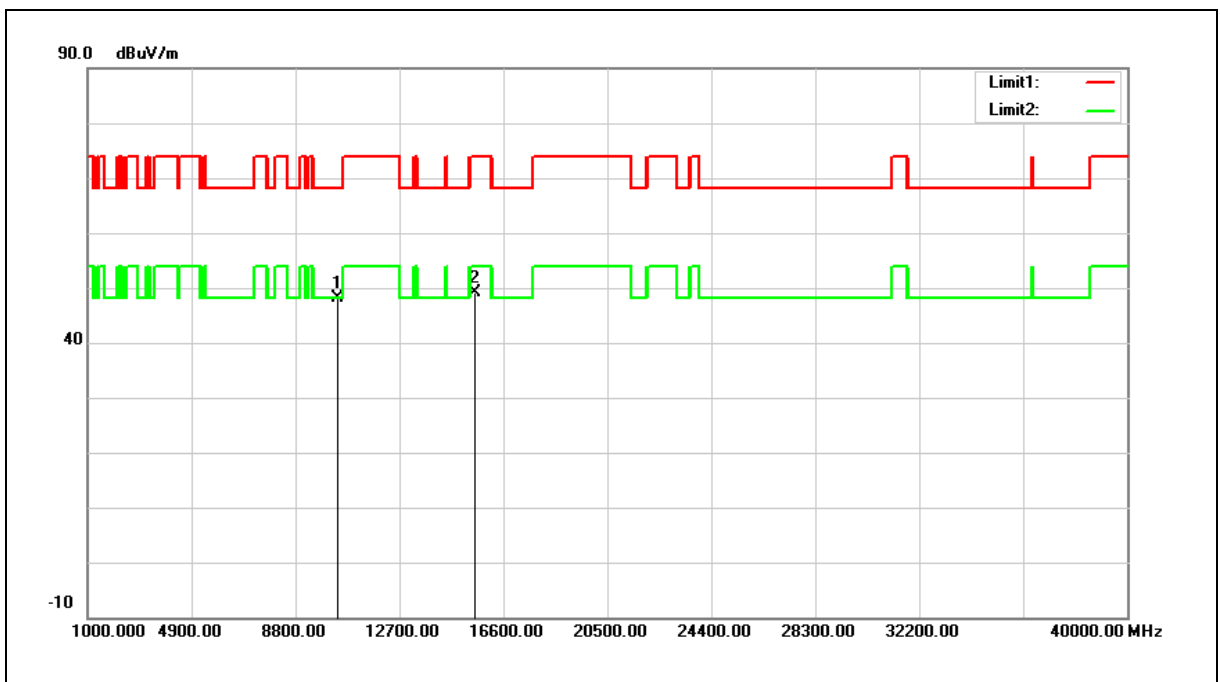


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	36.41	11.69	48.10	68.20	-20.10	peak
2	15540.000	34.50	14.52	49.02	74.00	-24.98	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

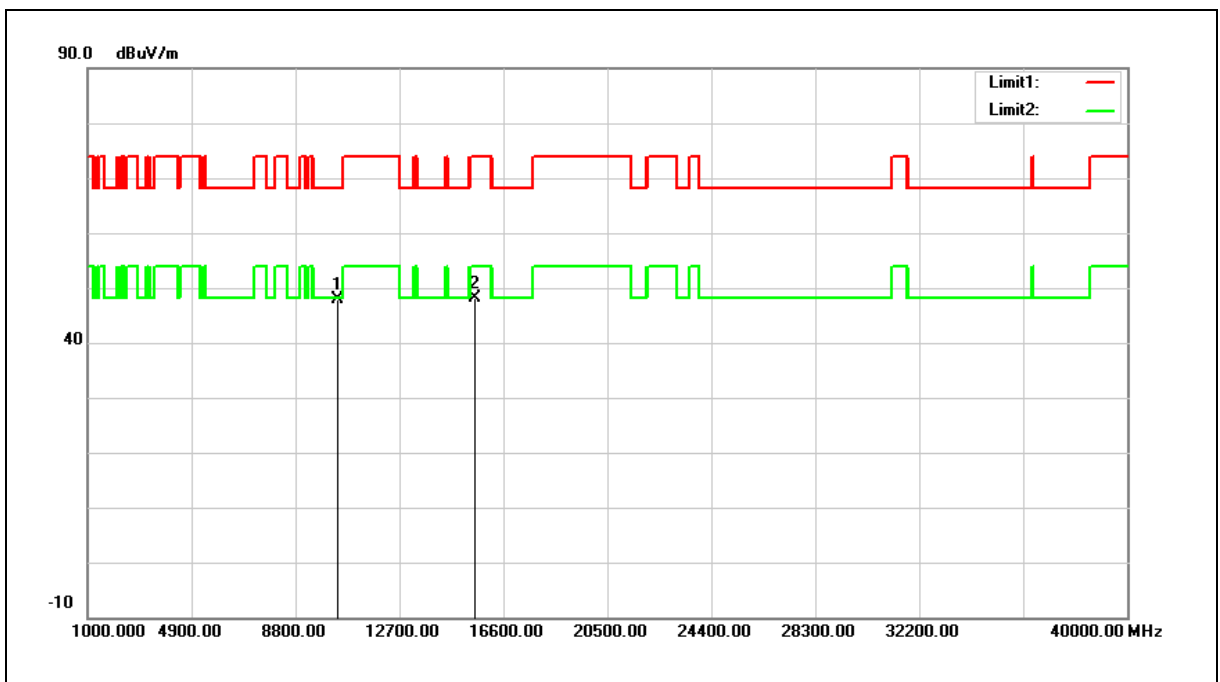


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	36.31	11.69	48.00	68.20	-20.20	peak
2	15540.000	33.71	14.52	48.23	74.00	-25.77	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

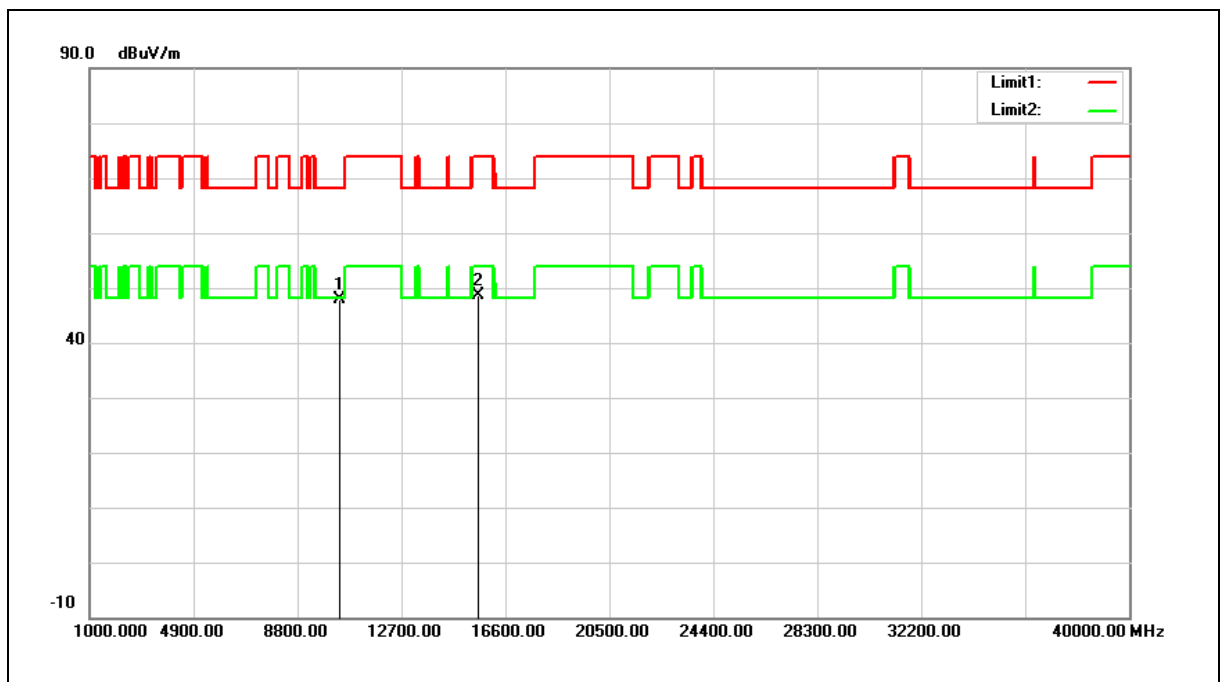


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	36.14	11.79	47.93	68.20	-20.27	peak
2	15600.000	34.13	14.39	48.52	74.00	-25.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

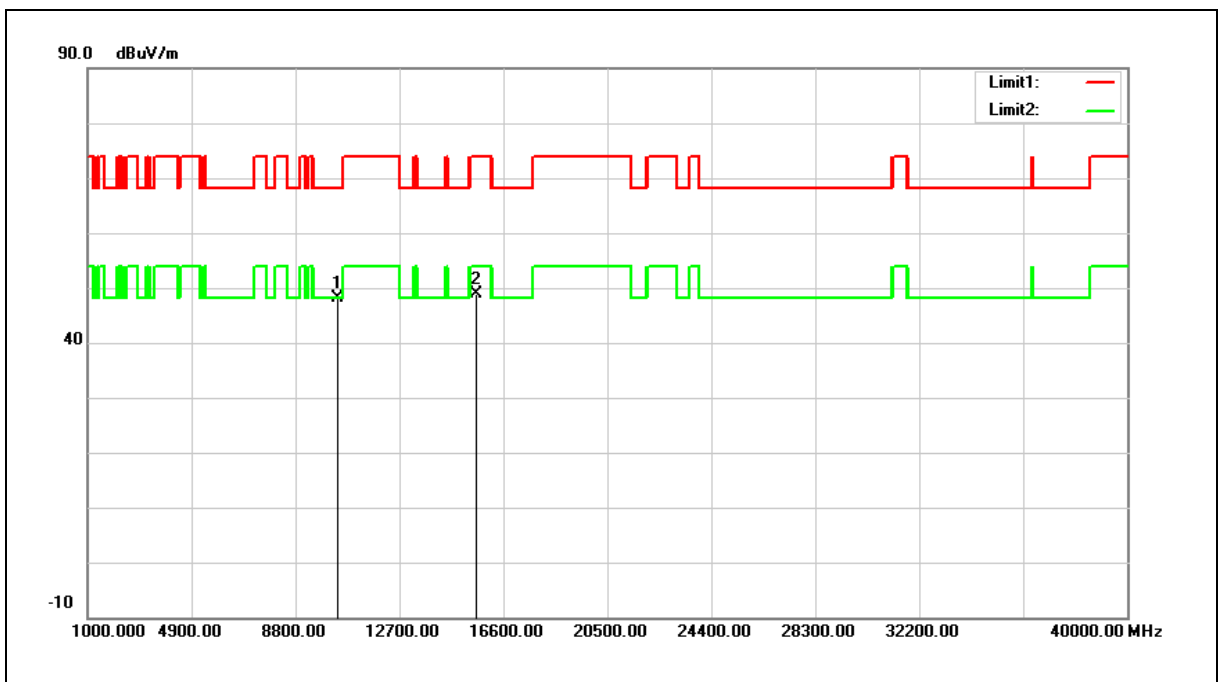


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	36.30	11.79	48.09	68.20	-20.11	peak
2	15600.000	34.49	14.39	48.88	74.00	-25.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

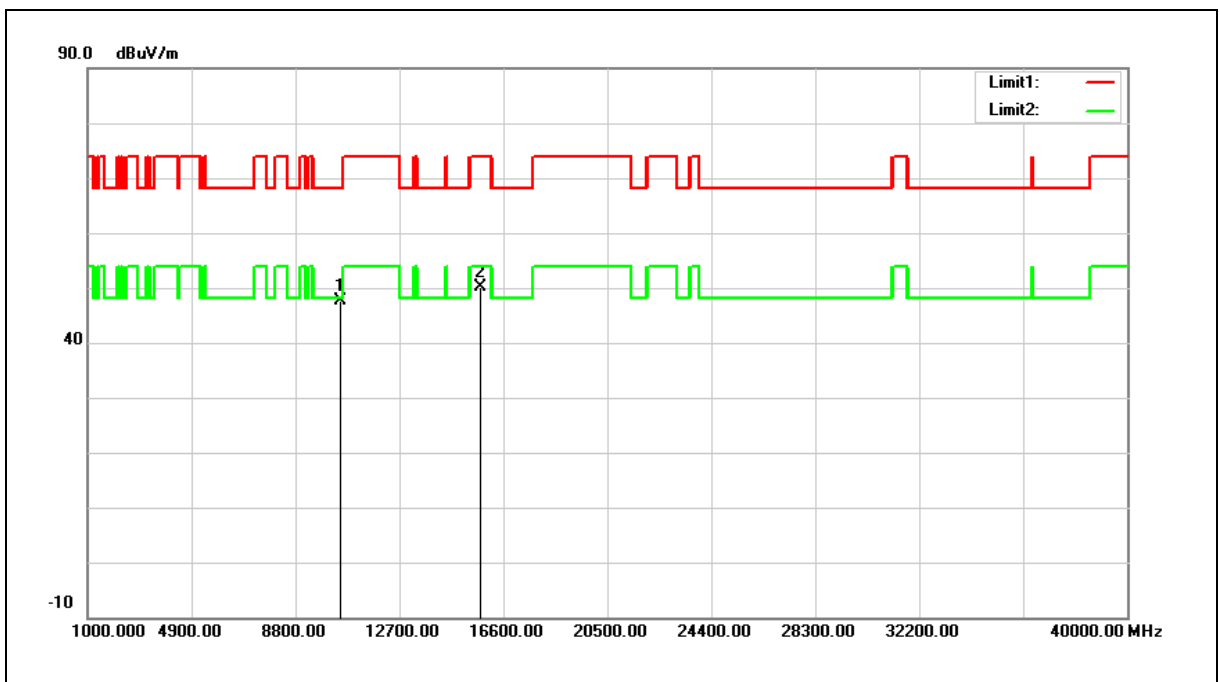


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	35.67	12.00	47.67	68.20	-20.53	peak
2	15720.000	36.02	14.13	50.15	74.00	-23.85	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

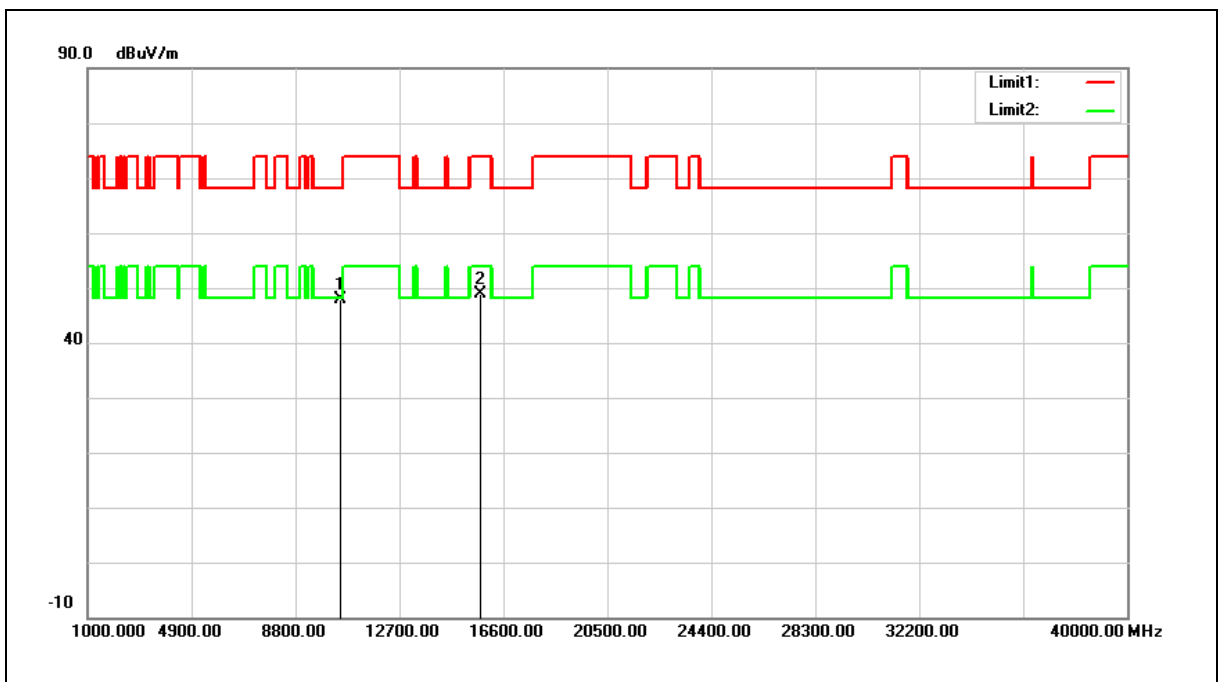


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	35.82	12.00	47.82	68.20	-20.38	peak
2	15720.000	34.85	14.13	48.98	74.00	-25.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

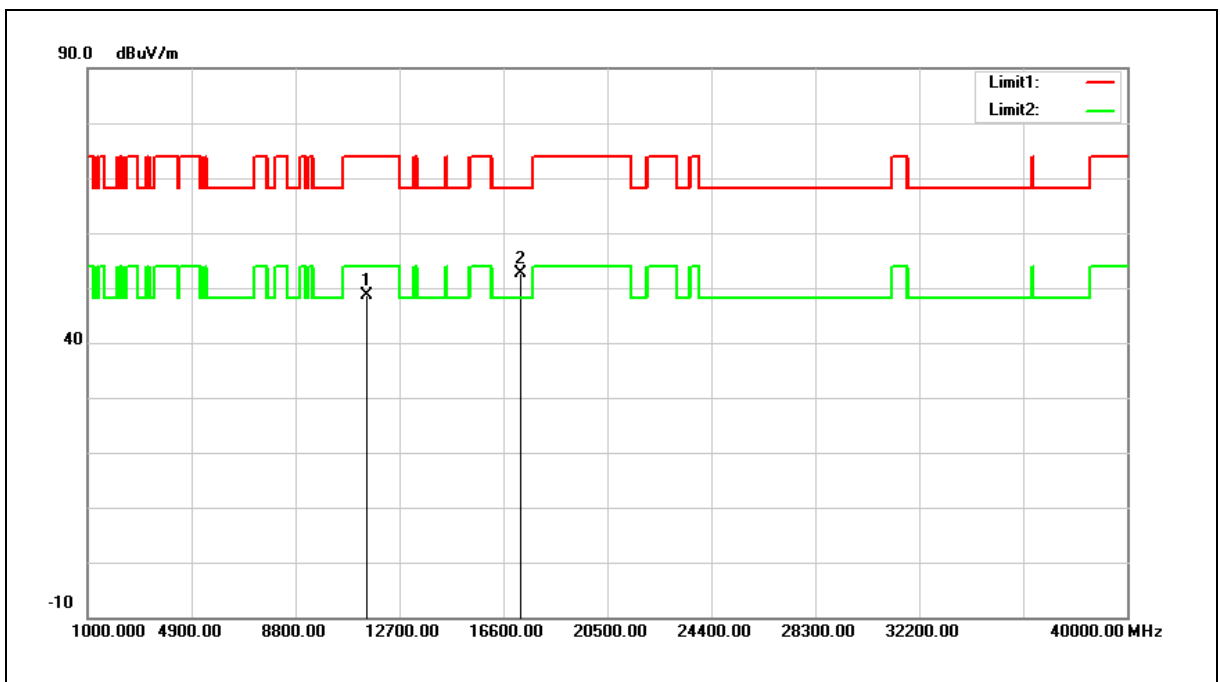


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	36.02	12.68	48.70	74.00	-25.30	peak
2	17235.000	34.07	18.52	52.59	68.20	-15.61	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

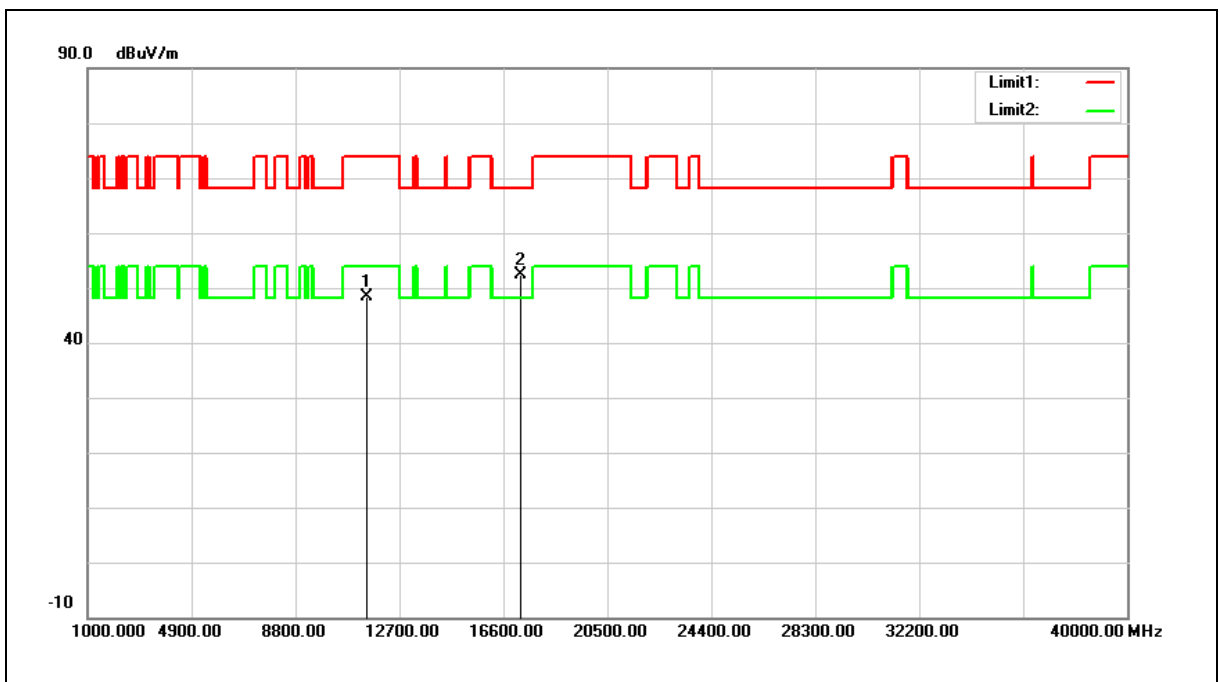


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.75	12.68	48.43	74.00	-25.57	peak
2	17235.000	33.79	18.52	52.31	68.20	-15.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

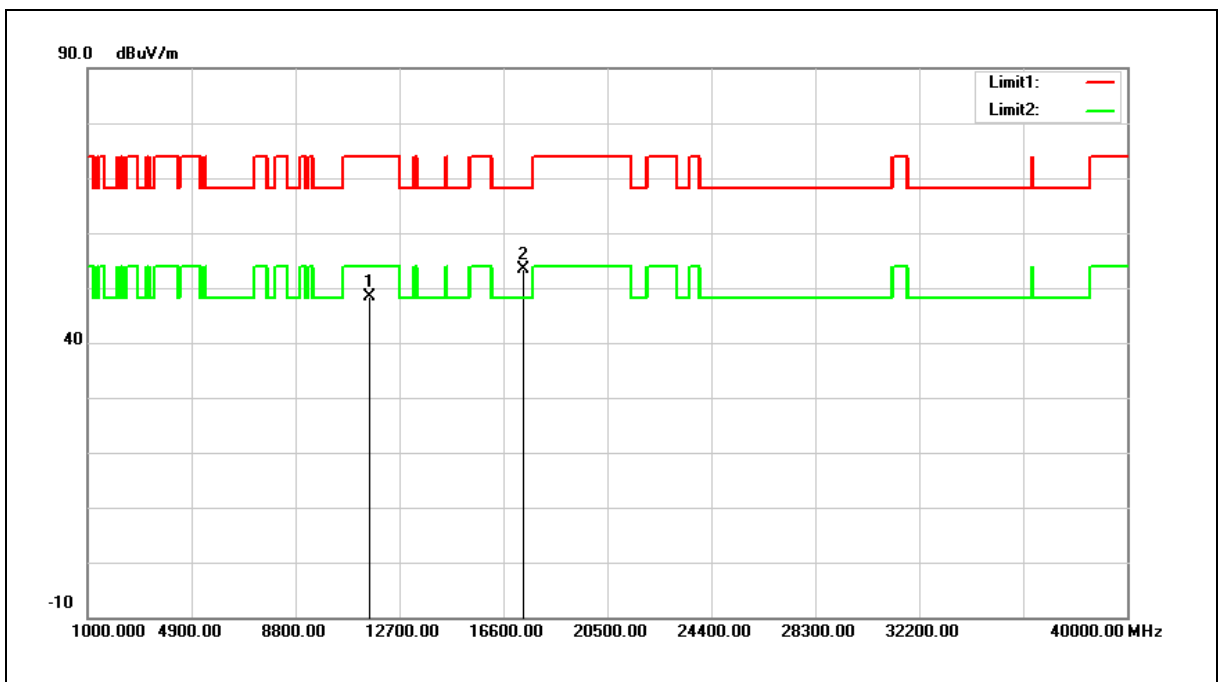


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.71	12.59	48.30	74.00	-25.70	peak
2	17355.000	34.05	19.32	53.37	68.20	-14.83	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

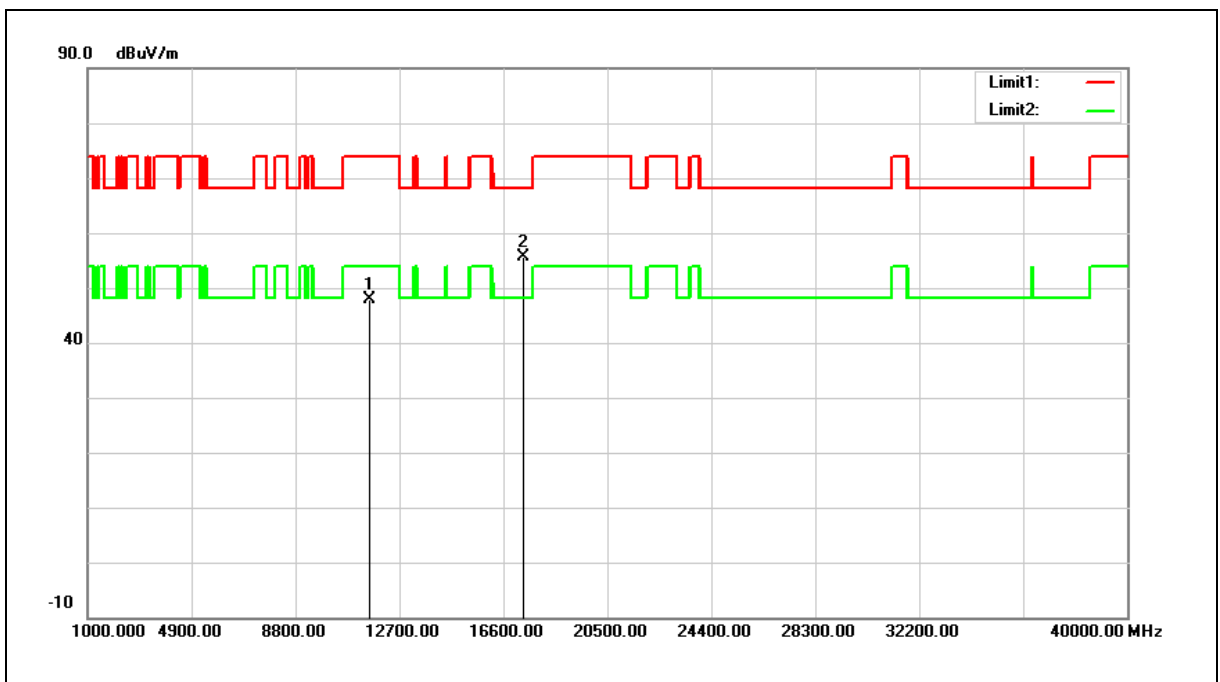


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.29	12.59	47.88	74.00	-26.12	peak
2	17355.000	36.29	19.32	55.61	68.20	-12.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

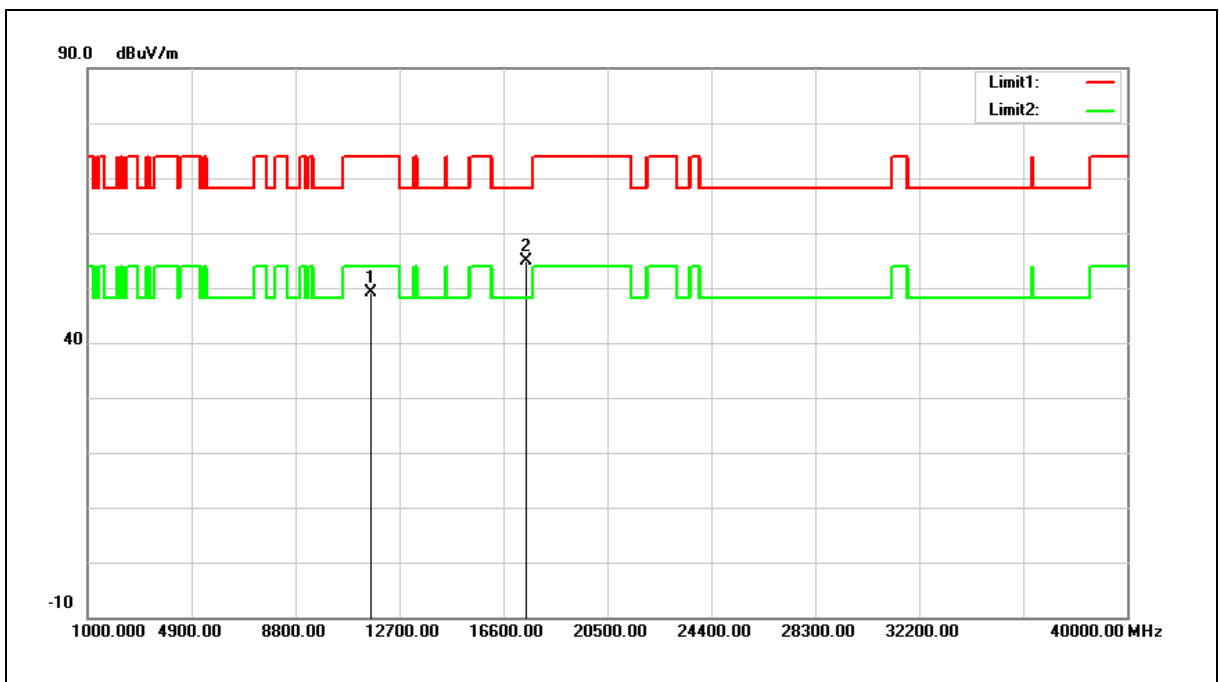


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	36.76	12.48	49.24	74.00	-24.76	peak
2	17475.000	34.74	20.13	54.87	68.20	-13.33	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

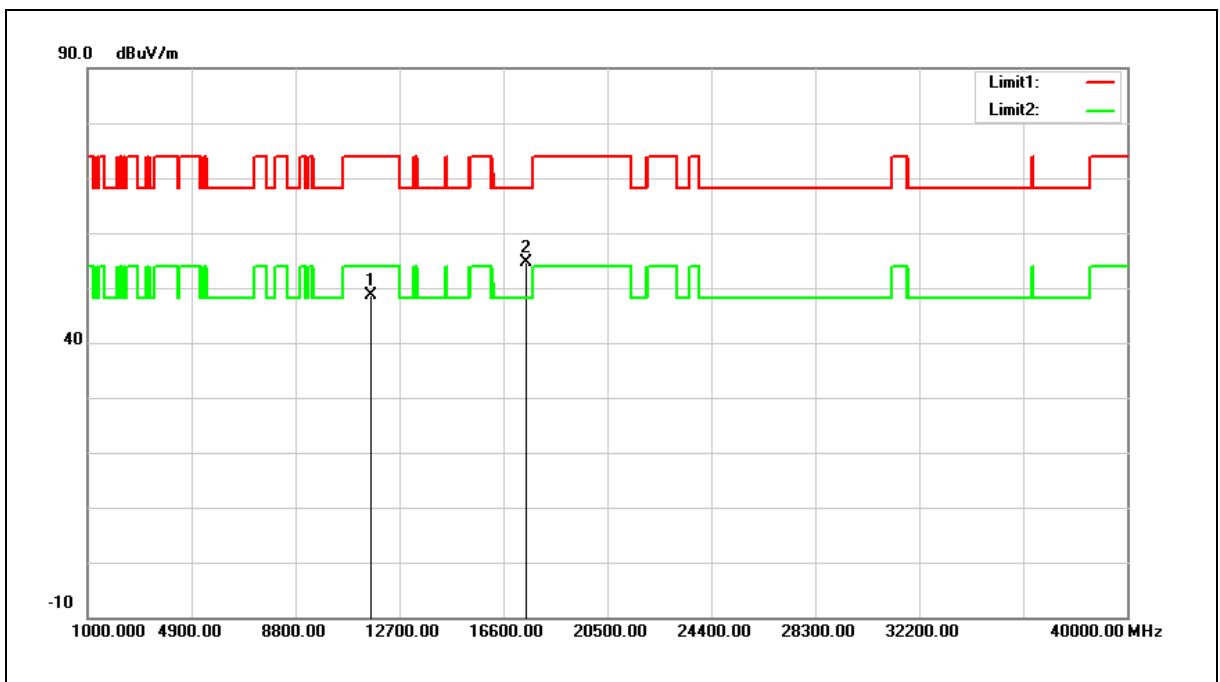


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	36.25	12.48	48.73	74.00	-25.27	peak
2	17475.000	34.41	20.13	54.54	68.20	-13.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

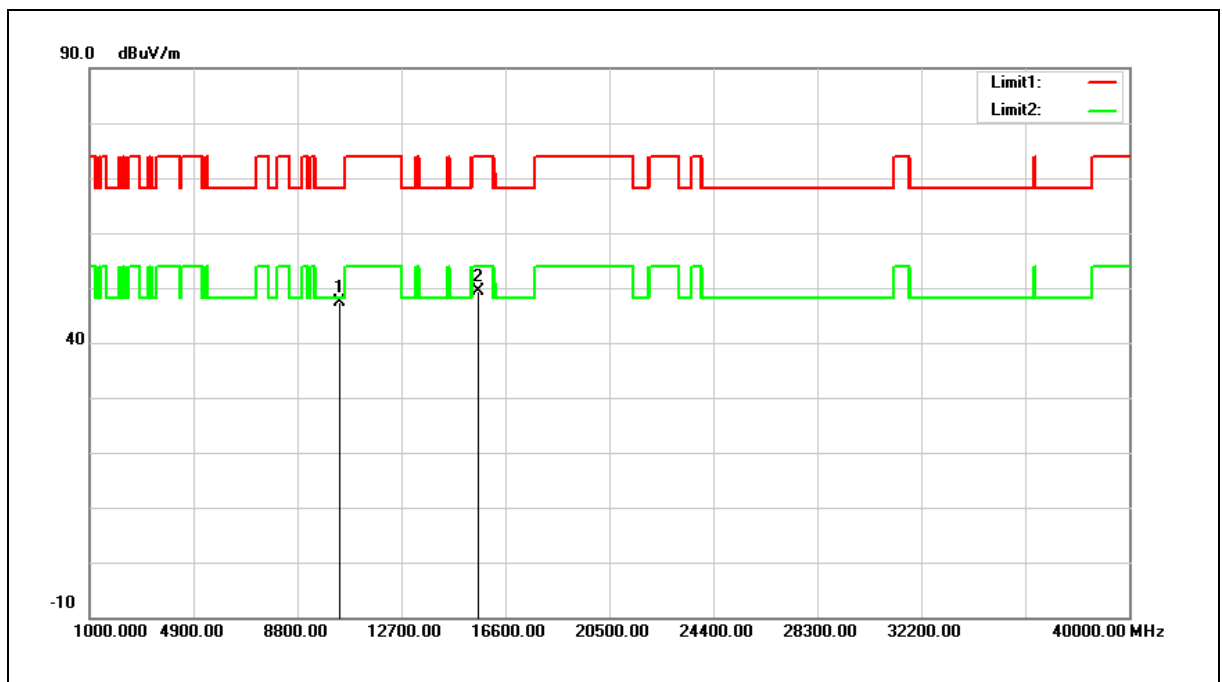


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	35.66	11.75	47.41	68.20	-20.79	peak
2	15570.000	34.85	14.45	49.30	74.00	-24.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

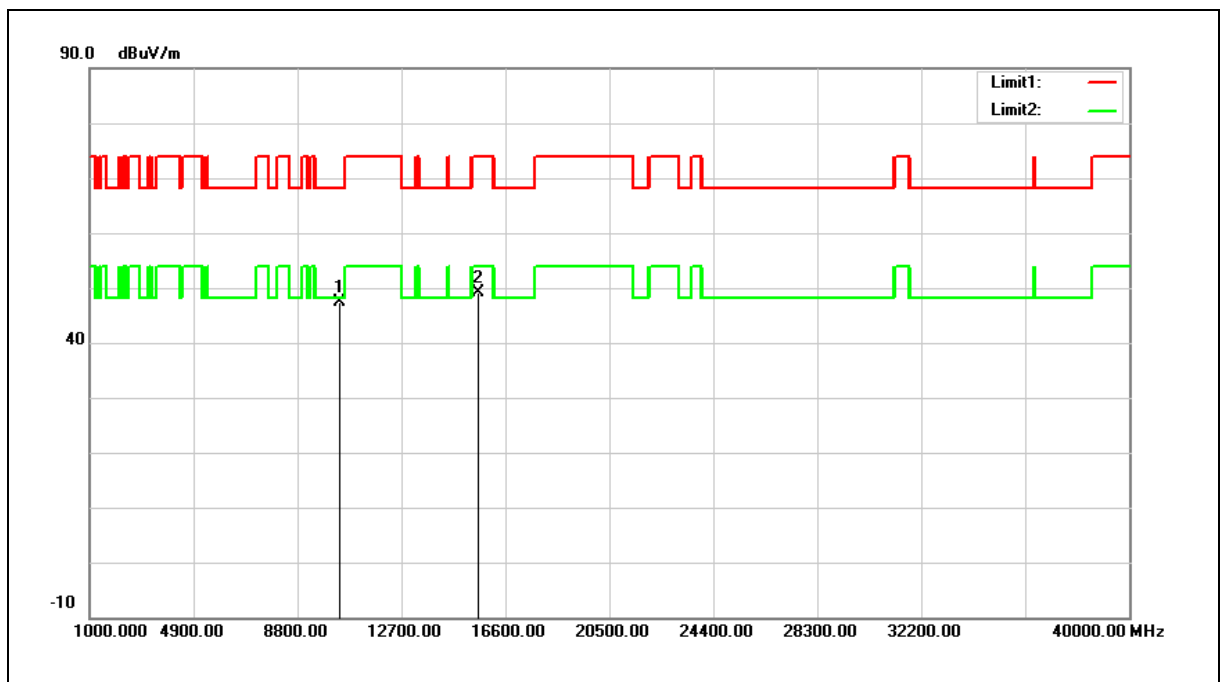


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	35.58	11.75	47.33	68.20	-20.87	peak
2	15570.000	34.70	14.45	49.15	74.00	-24.85	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

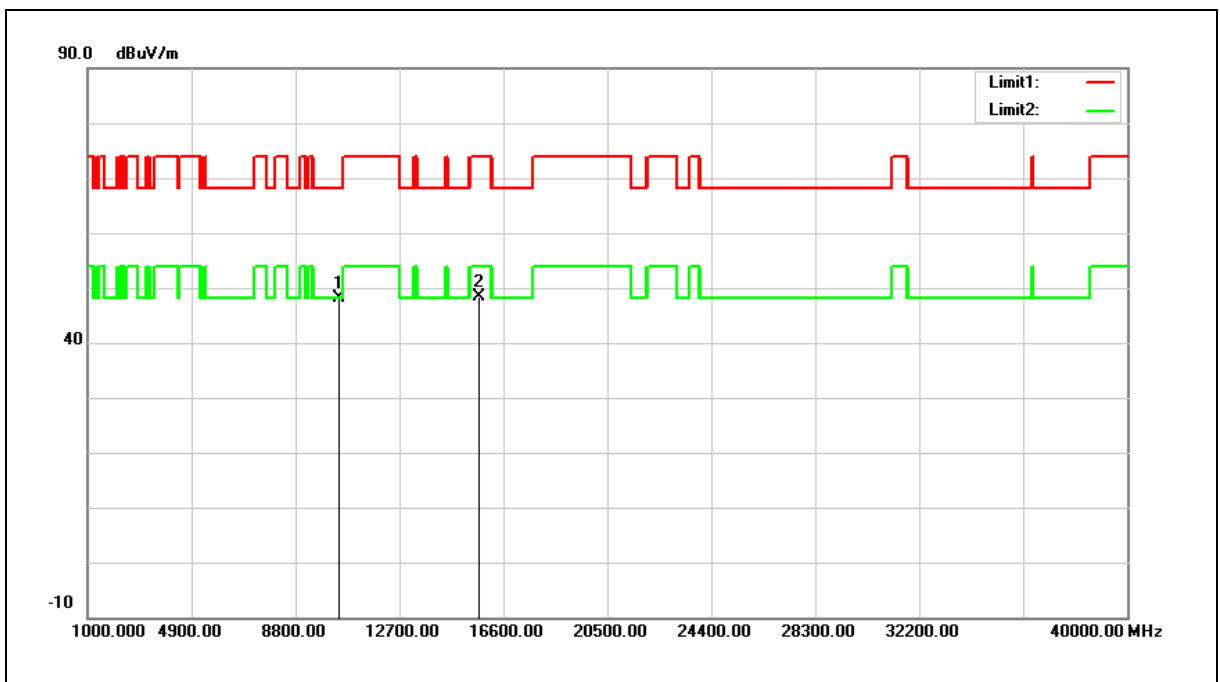


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	36.08	11.95	48.03	68.20	-20.17	peak
2	15690.000	34.14	14.19	48.33	74.00	-25.67	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

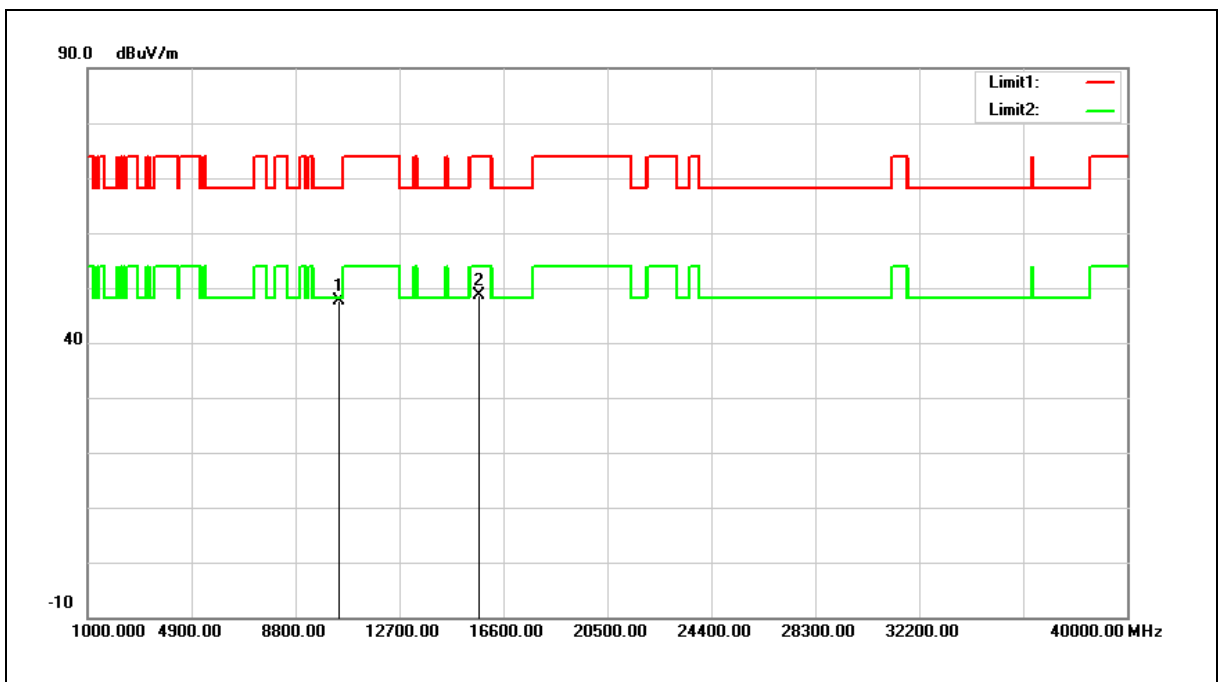


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	35.57	11.95	47.52	68.20	-20.68	peak
2	15690.000	34.50	14.19	48.69	74.00	-25.31	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

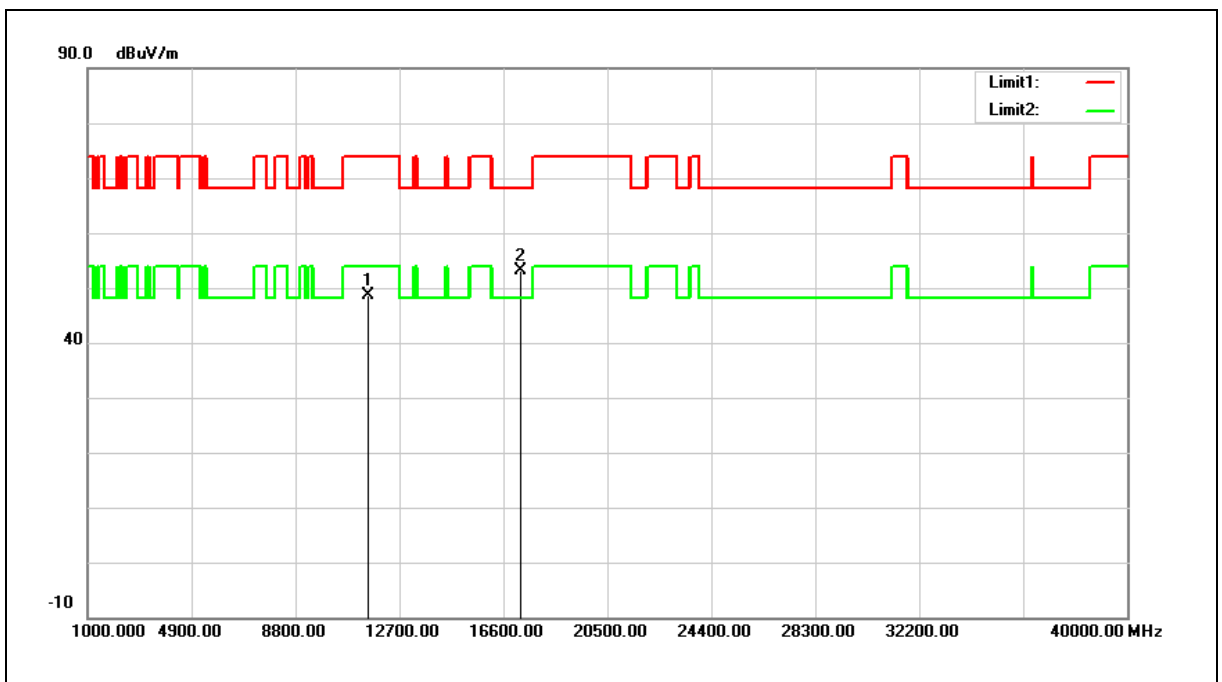


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	35.98	12.68	48.66	74.00	-25.34	peak
2	17265.000	34.37	18.72	53.09	68.20	-15.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

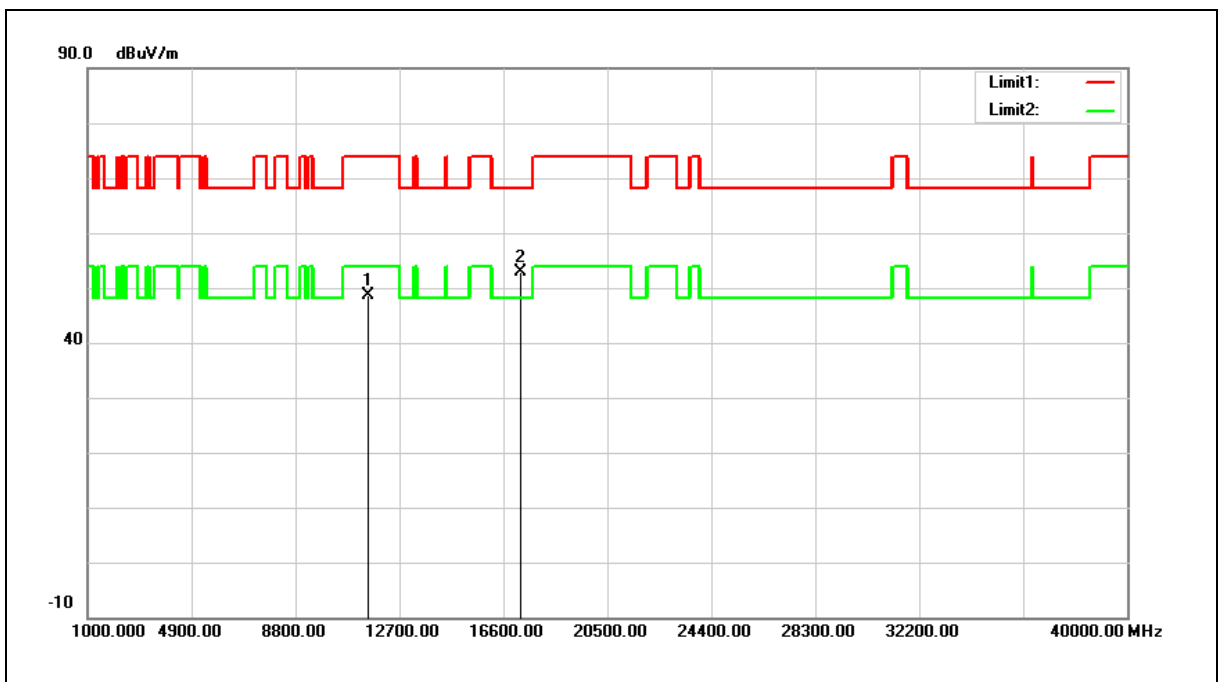


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	35.89	12.68	48.57	74.00	-25.43	peak
2	17265.000	34.16	18.72	52.88	68.20	-15.32	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

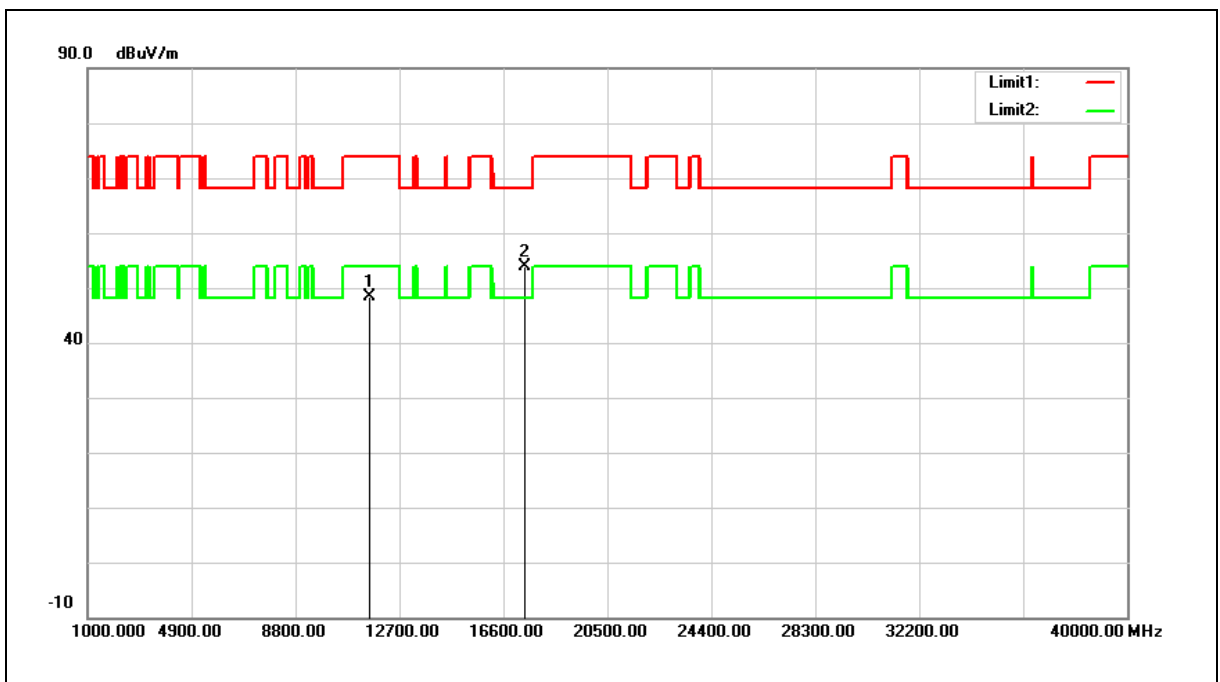


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	35.71	12.56	48.27	74.00	-25.73	peak
2	17385.000	34.31	19.52	53.83	68.20	-14.37	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

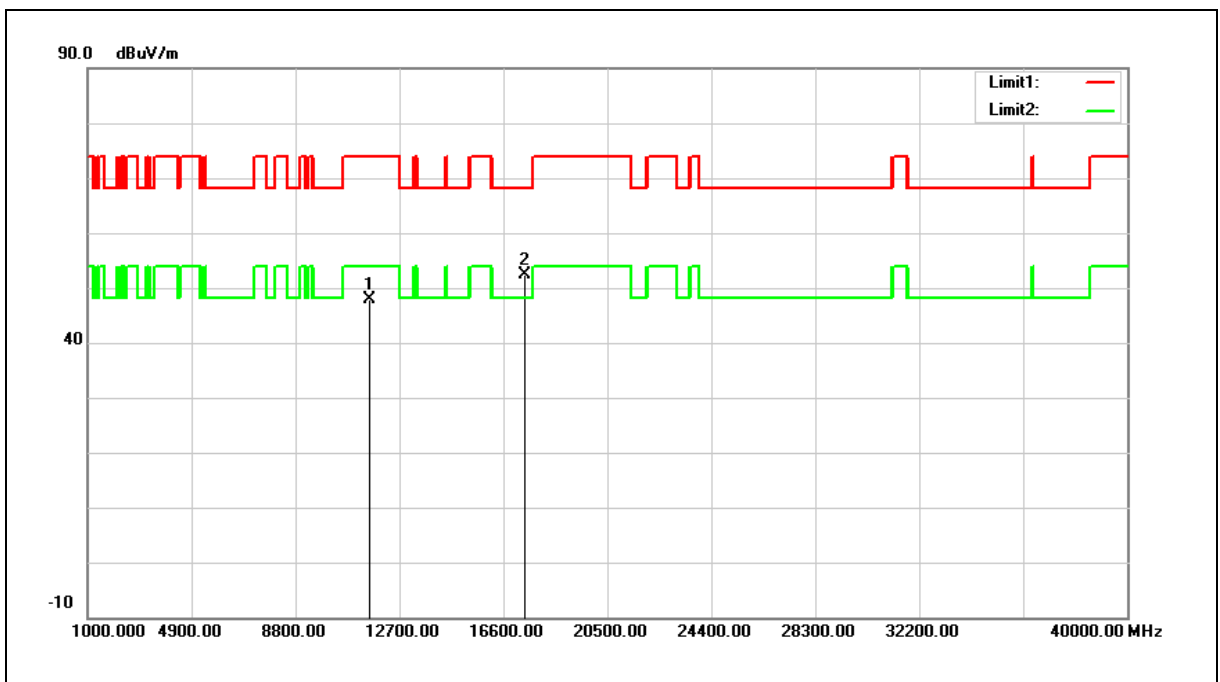


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	35.28	12.56	47.84	74.00	-26.16	peak
2	17385.000	32.98	19.52	52.50	68.20	-15.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

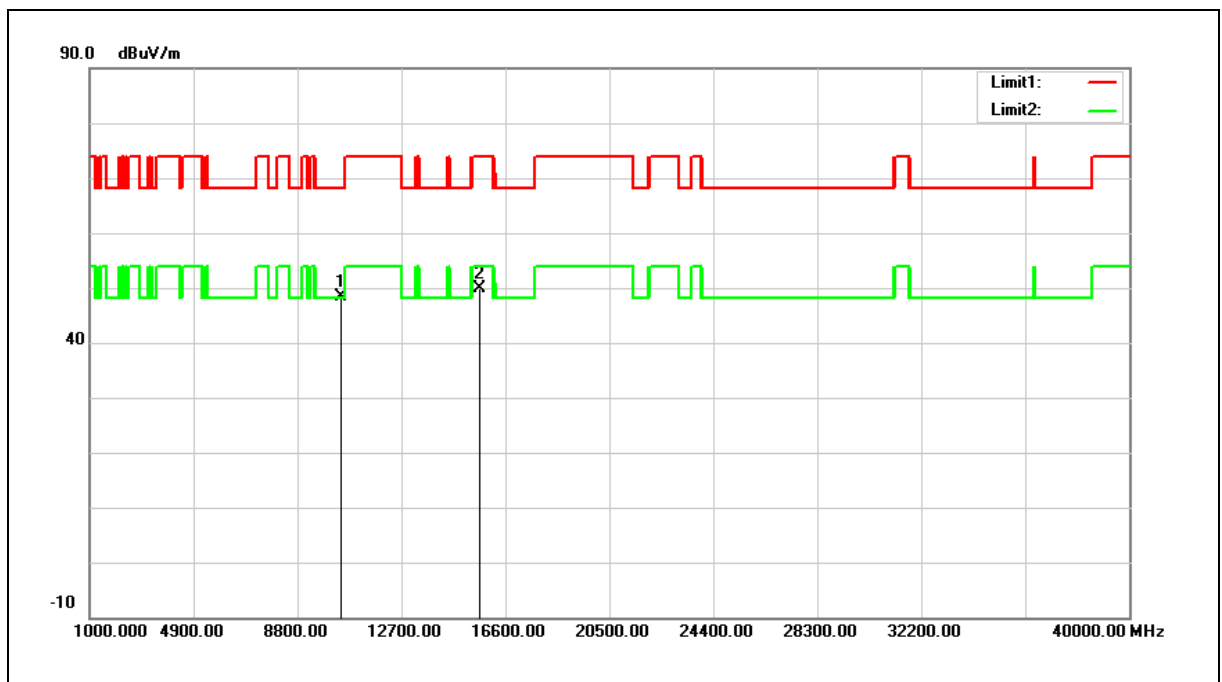


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	36.63	11.85	48.48	68.20	-19.72	peak
2	15630.000	35.58	14.33	49.91	74.00	-24.09	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

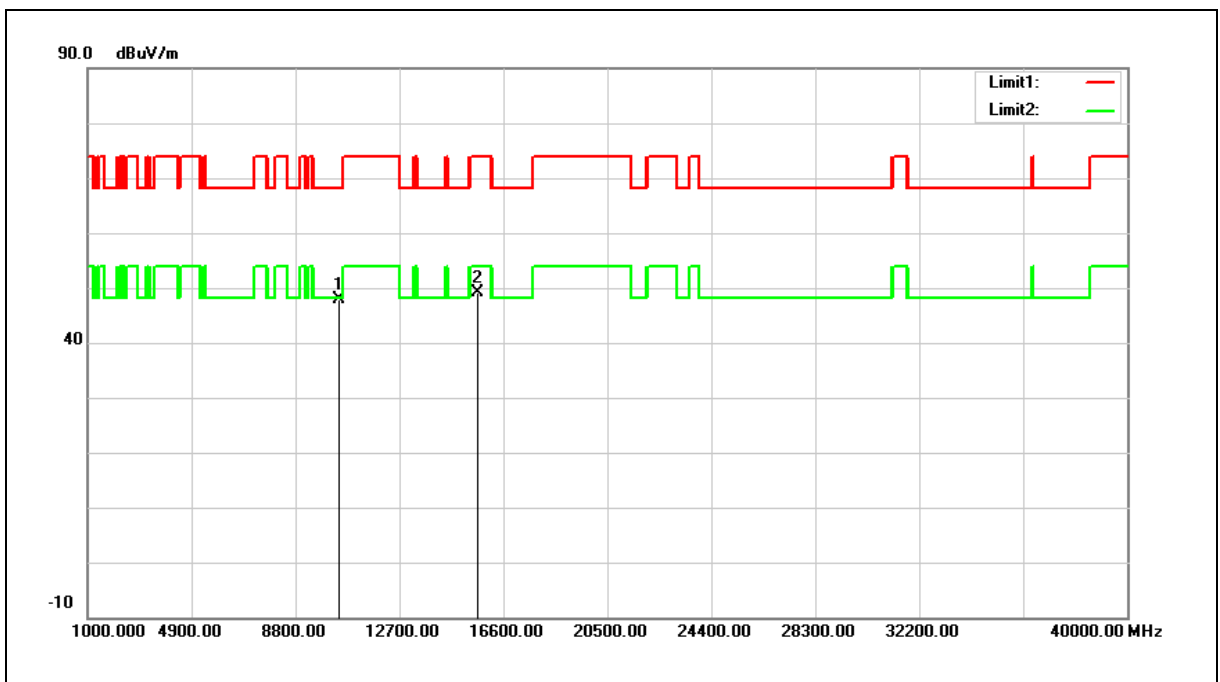


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	36.10	11.85	47.95	68.20	-20.25	peak
2	15630.000	34.80	14.33	49.13	74.00	-24.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

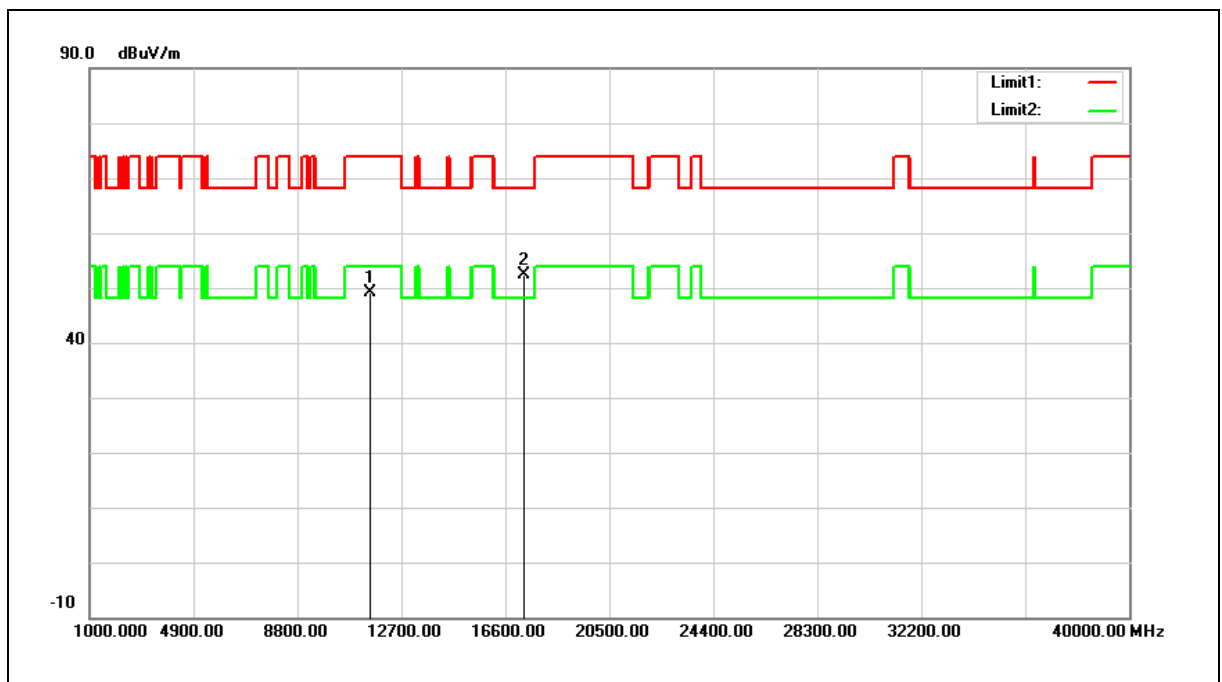


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	36.50	12.62	49.12	74.00	-24.88	peak
2	17325.000	33.19	19.12	52.31	68.20	-15.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

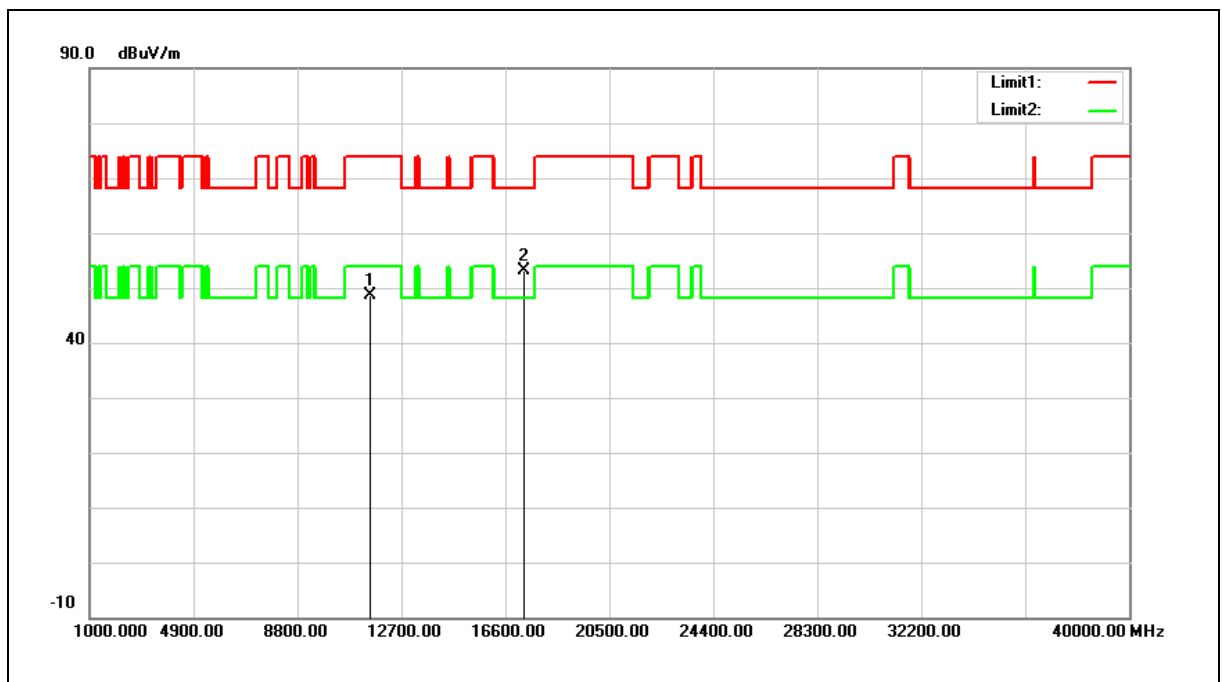


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	36.09	12.62	48.71	74.00	-25.29	peak
2	17325.000	34.11	19.12	53.23	68.20	-14.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

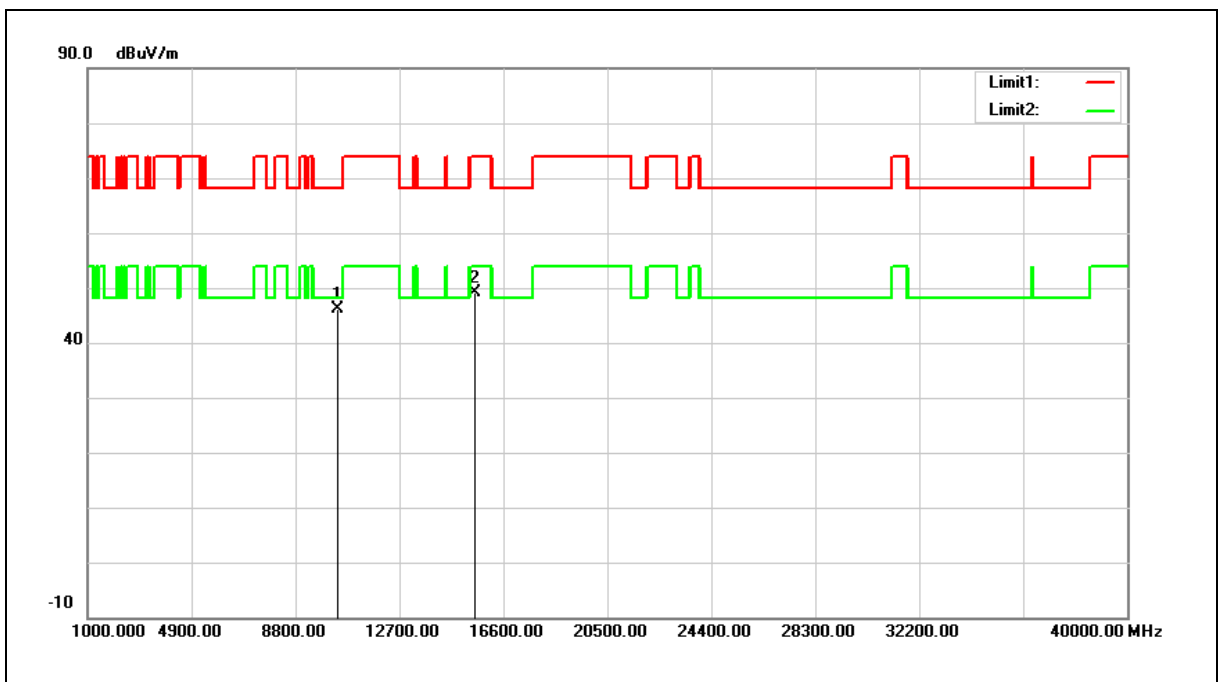


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	34.40	11.69	46.09	68.20	-22.11	peak
2	15540.000	34.58	14.52	49.10	74.00	-24.90	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

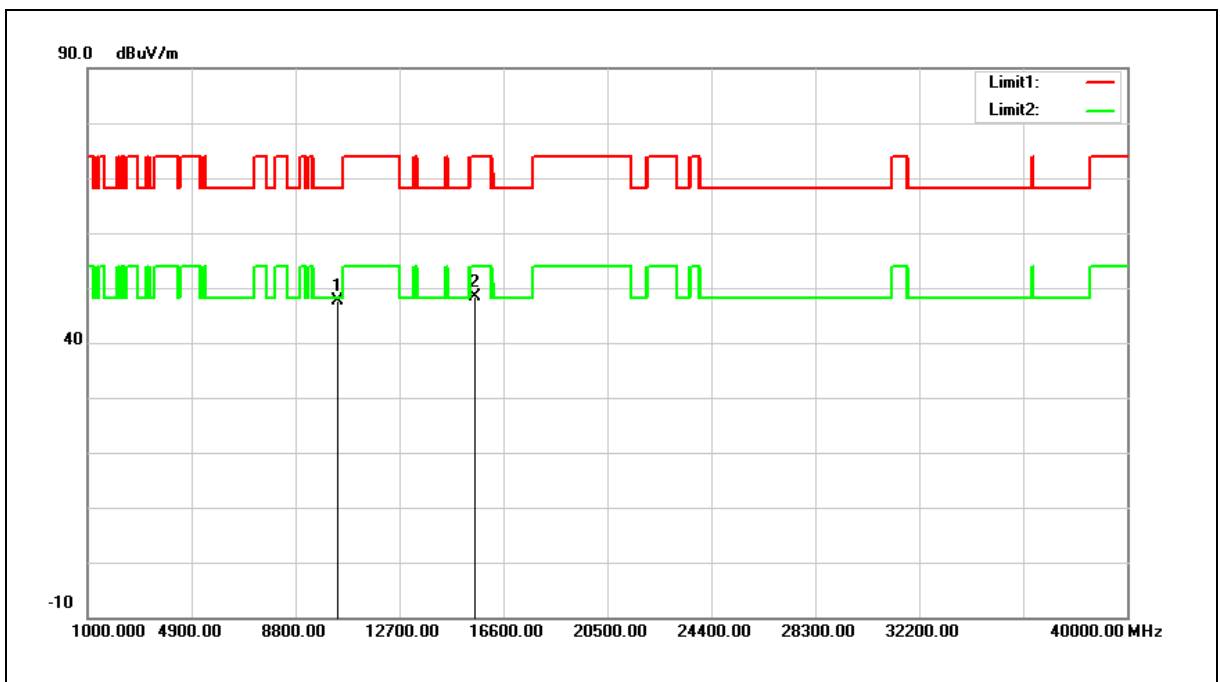


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	35.82	11.69	47.51	68.20	-20.69	peak
2	15540.000	33.88	14.52	48.40	74.00	-25.60	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

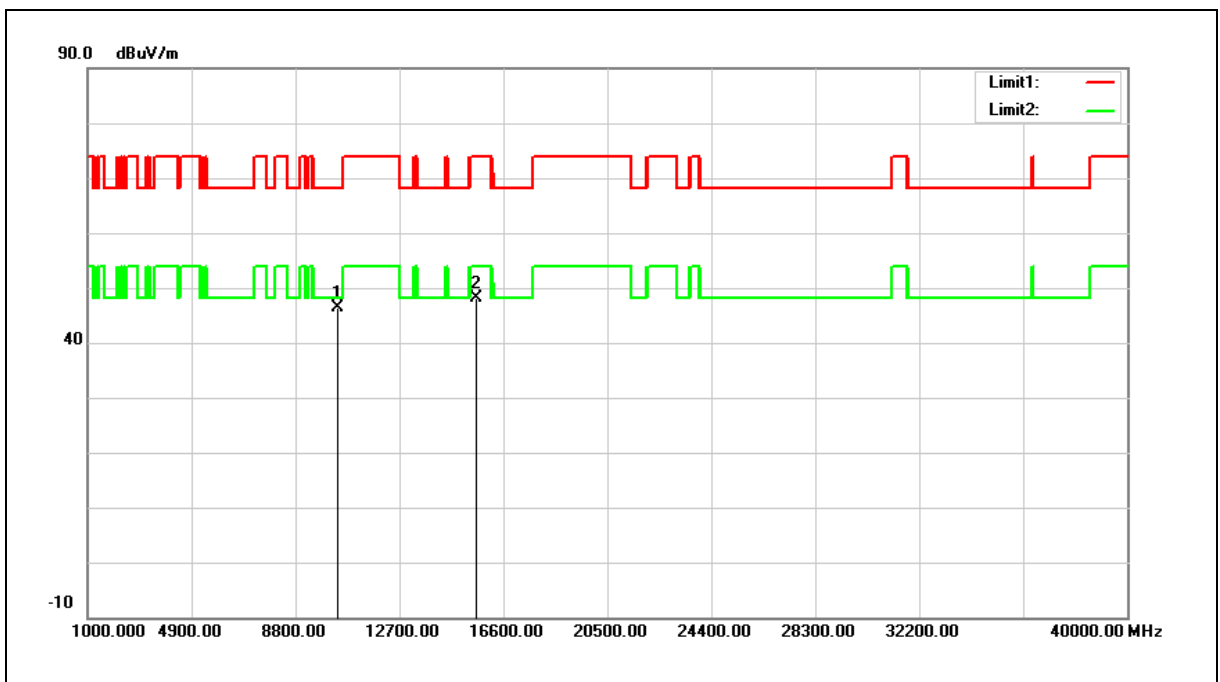


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	34.67	11.79	46.46	68.20	-21.74	peak
2	15600.000	33.81	14.39	48.20	74.00	-25.80	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

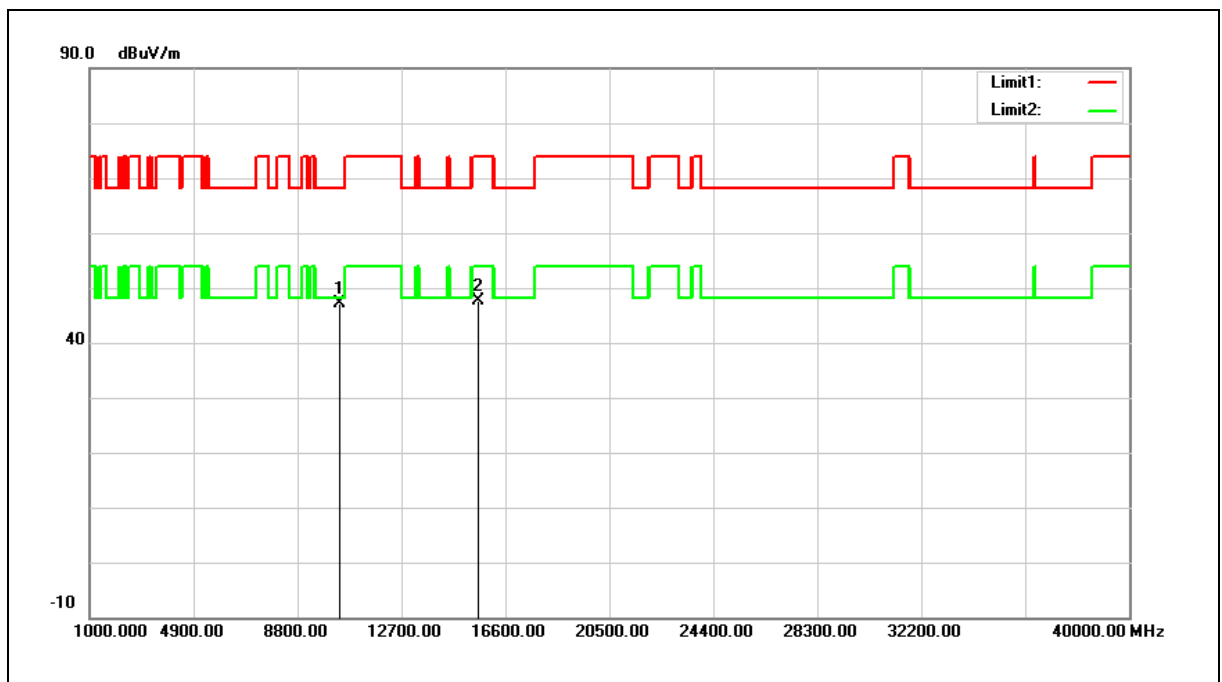


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	35.39	11.79	47.18	68.20	-21.02	peak
2	15600.000	33.19	14.39	47.58	74.00	-26.42	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

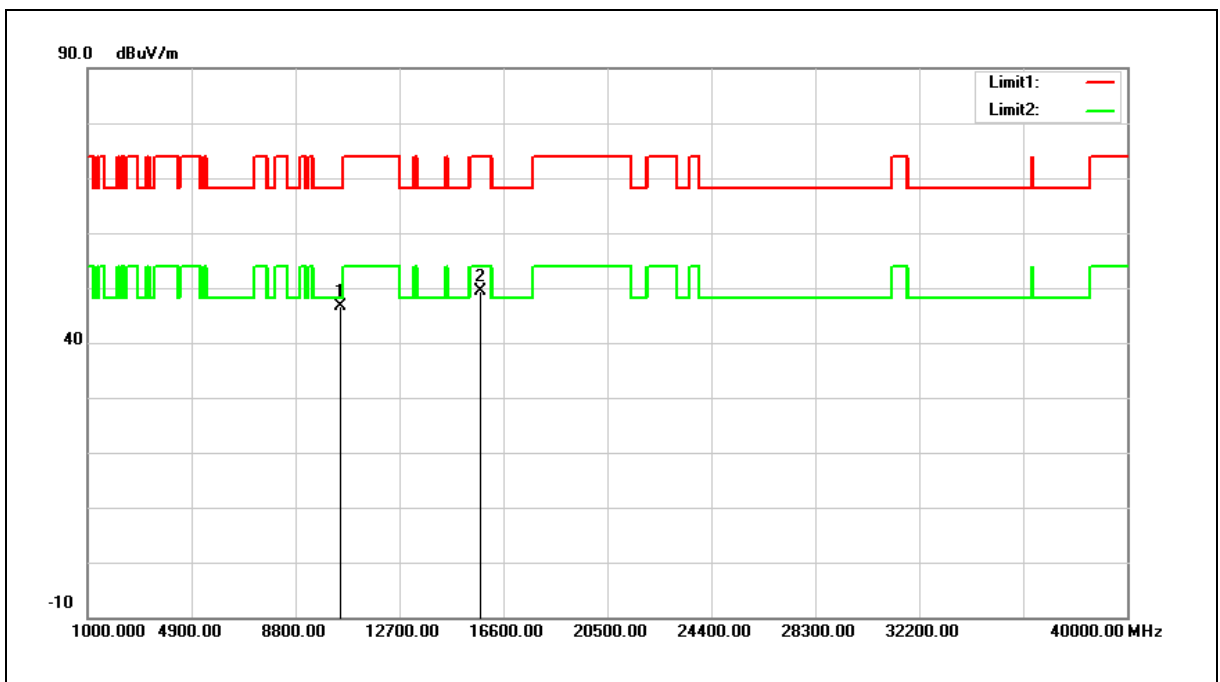


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	34.70	12.00	46.70	68.20	-21.50	peak
2	15720.000	35.30	14.13	49.43	74.00	-24.57	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

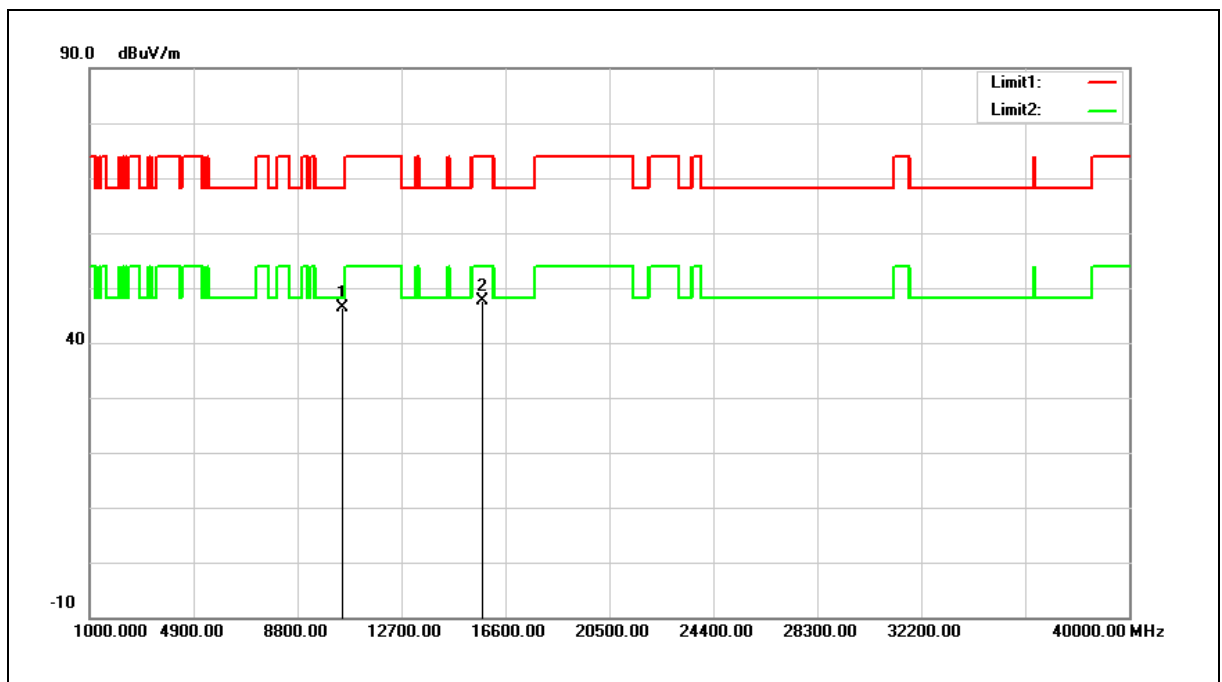


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	34.37	12.00	46.37	68.20	-21.83	peak
2	15720.000	33.59	14.13	47.72	74.00	-26.28	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

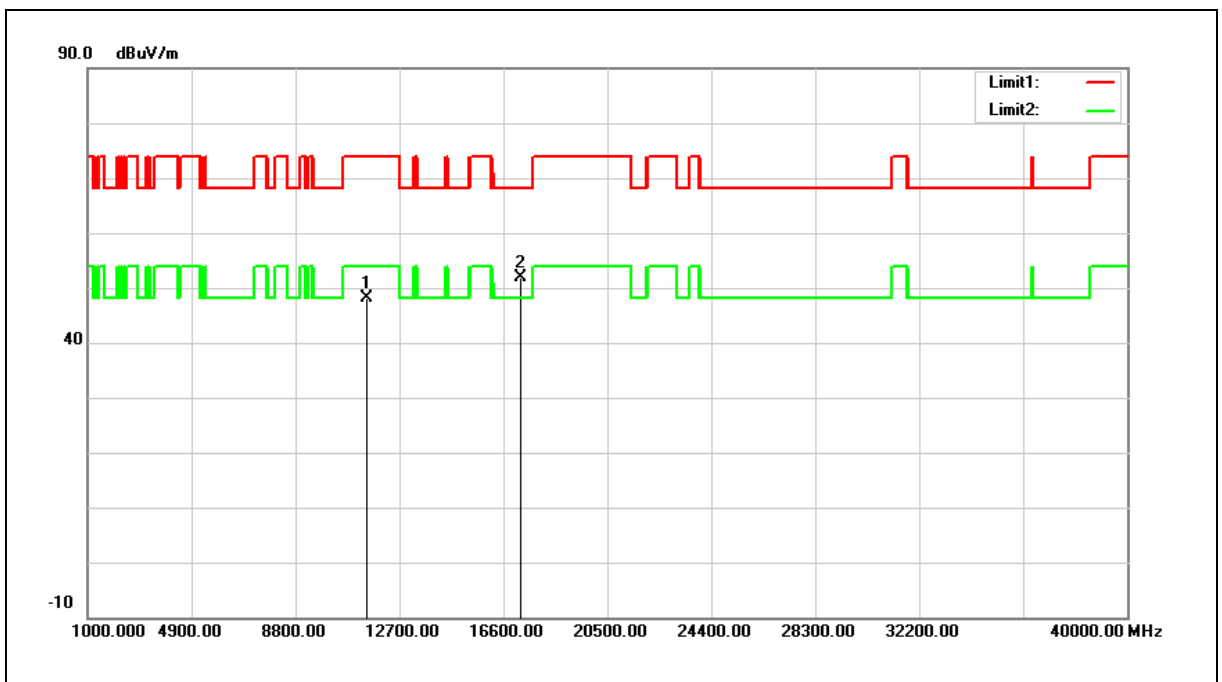


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.33	12.68	48.01	74.00	-25.99	peak
2	17235.000	33.45	18.52	51.97	68.20	-16.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

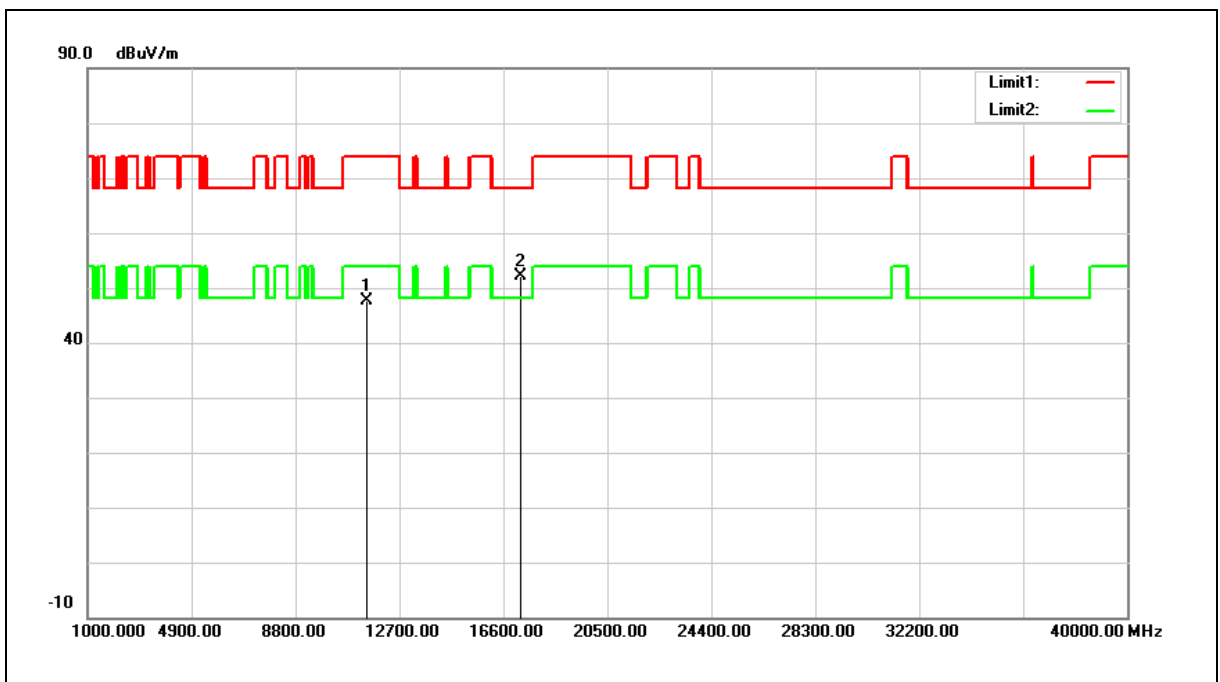


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	34.85	12.68	47.53	74.00	-26.47	peak
2	17235.000	33.60	18.52	52.12	68.20	-16.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

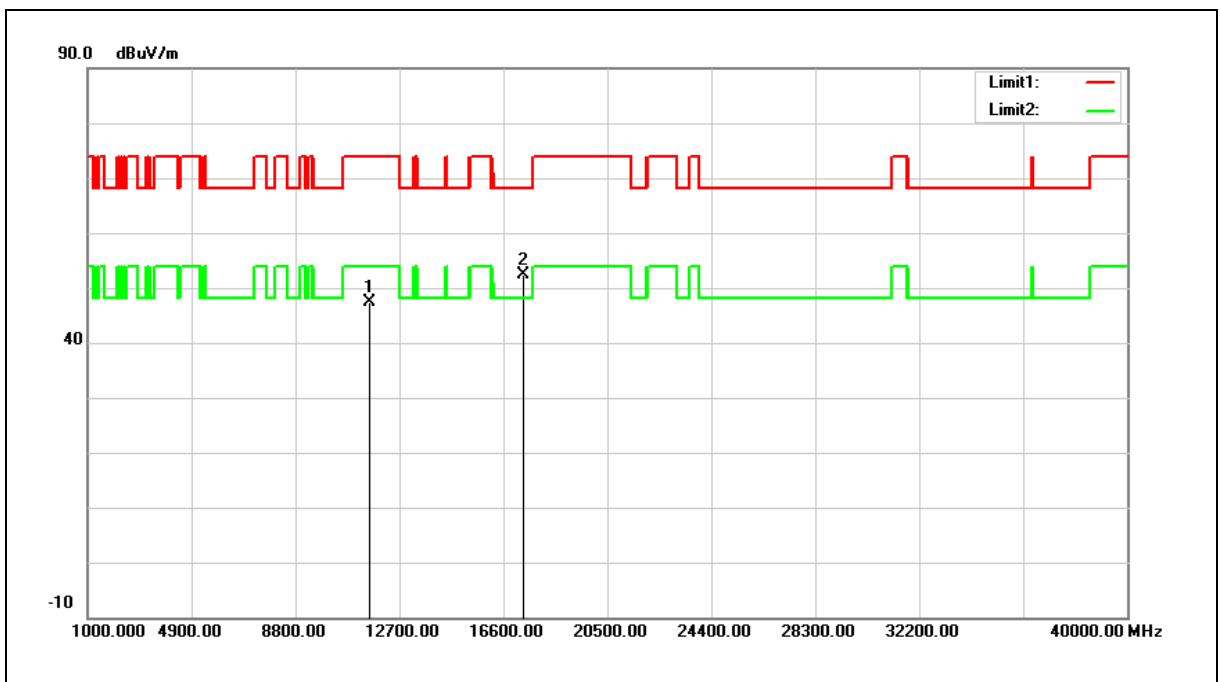


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	34.77	12.59	47.36	74.00	-26.64	peak
2	17355.000	33.17	19.32	52.49	68.20	-15.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

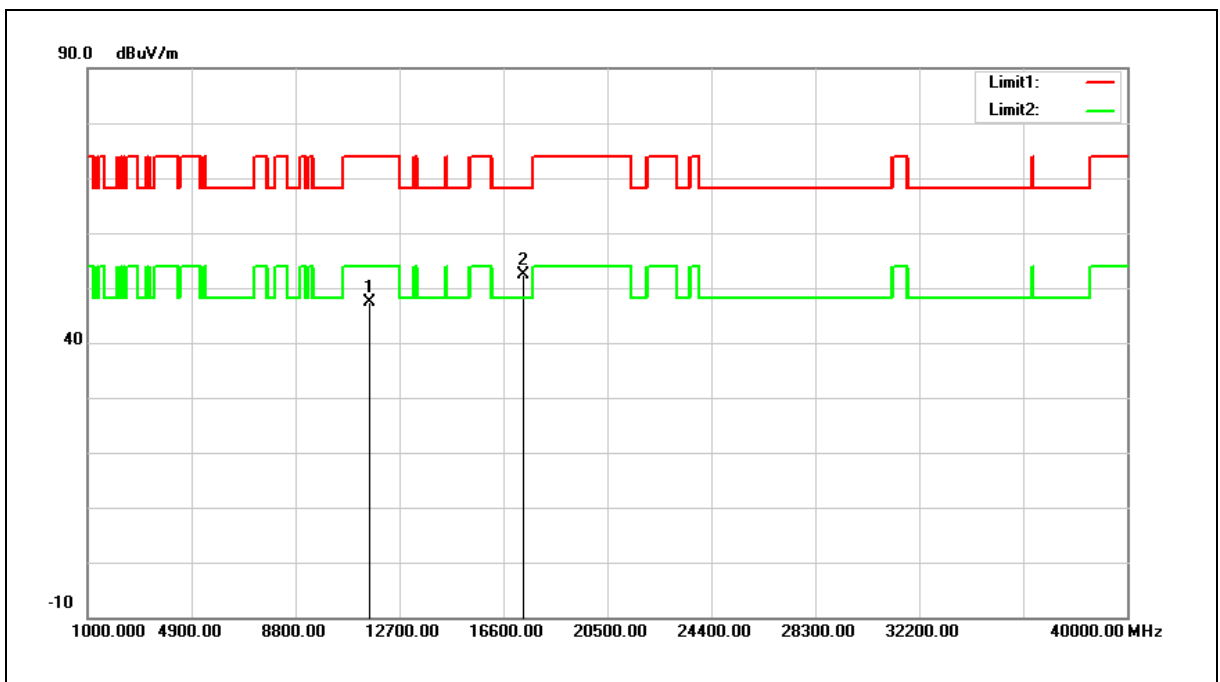


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	34.68	12.59	47.27	74.00	-26.73	peak
2	17355.000	33.15	19.32	52.47	68.20	-15.73	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

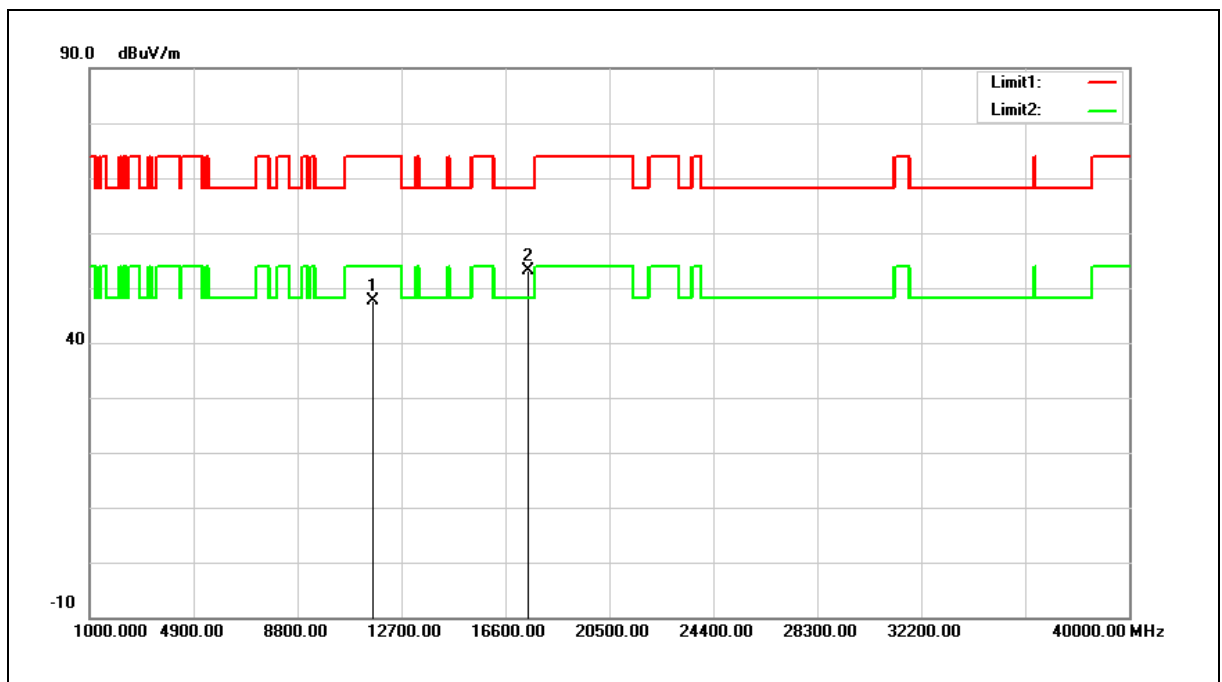


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.22	12.48	47.70	74.00	-26.30	peak
2	17475.000	33.10	20.13	53.23	68.20	-14.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

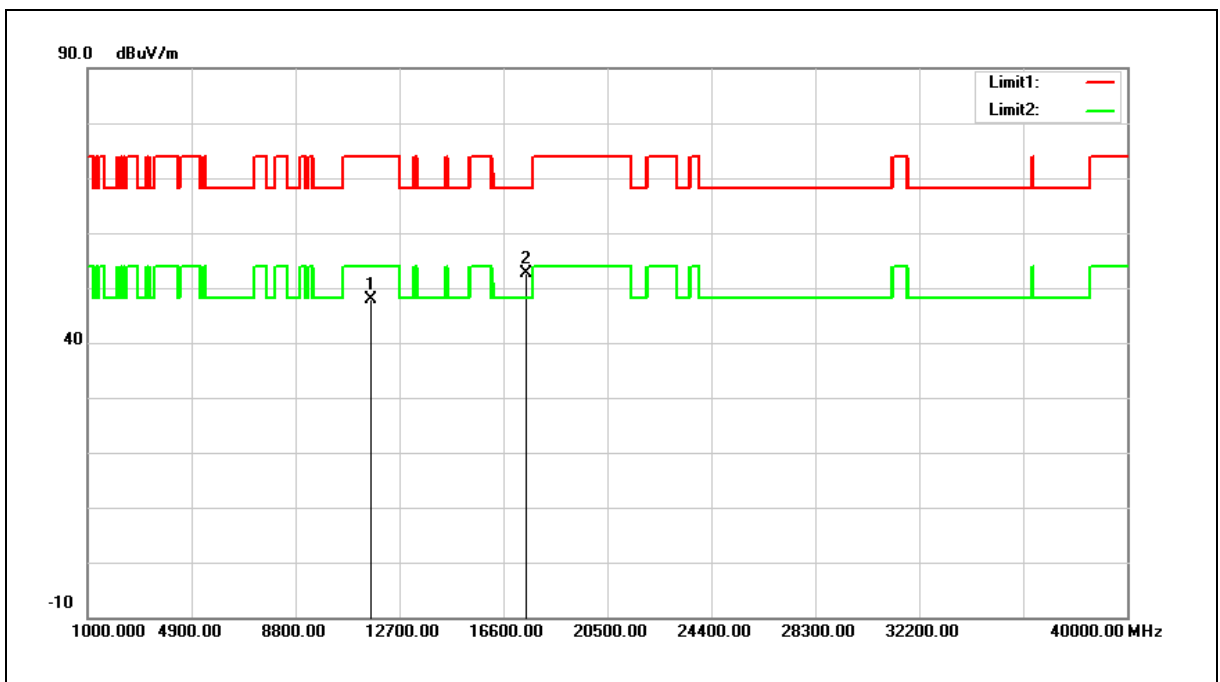


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.48	12.48	47.96	74.00	-26.04	peak
2	17475.000	32.55	20.13	52.68	68.20	-15.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

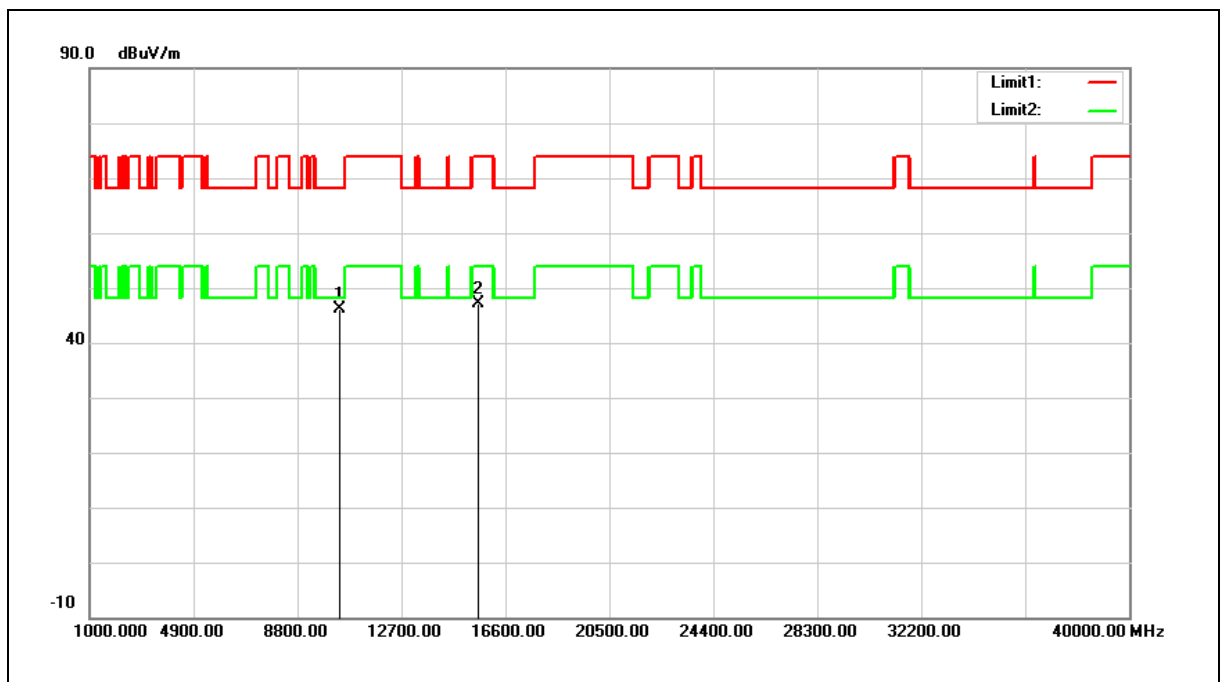


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	34.31	11.75	46.06	68.20	-22.14	peak
2	15570.000	32.68	14.45	47.13	74.00	-26.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

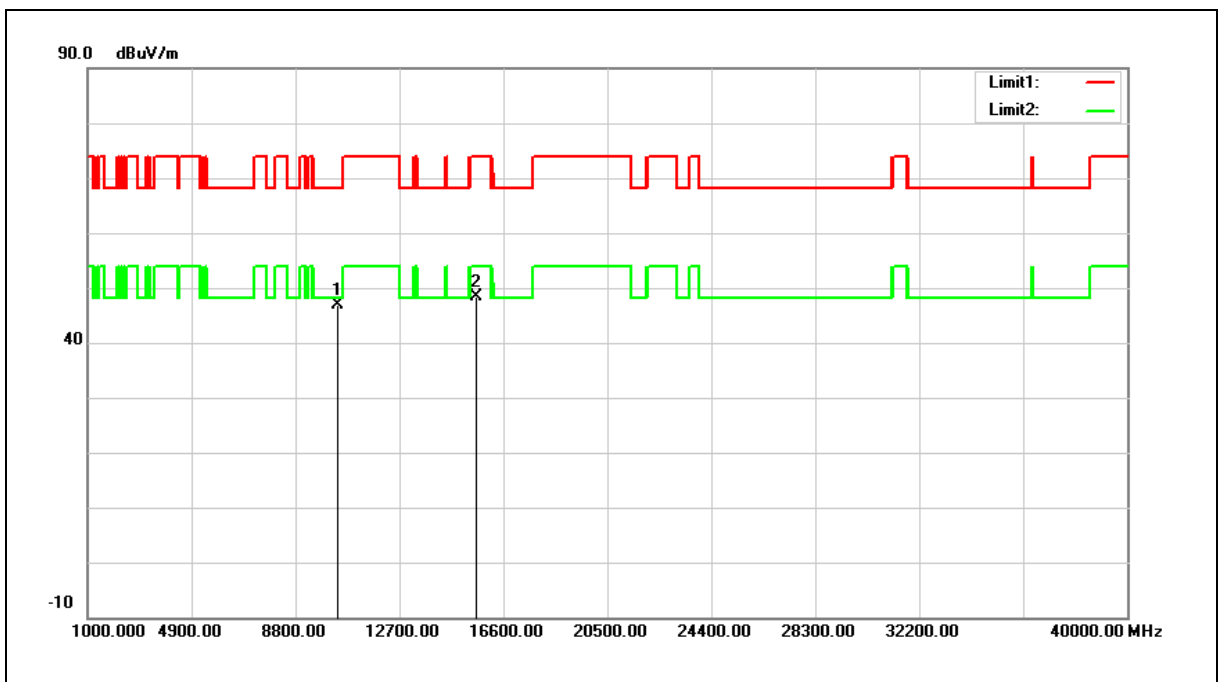


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	35.22	11.75	46.97	68.20	-21.23	peak
2	15570.000	33.81	14.45	48.26	74.00	-25.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

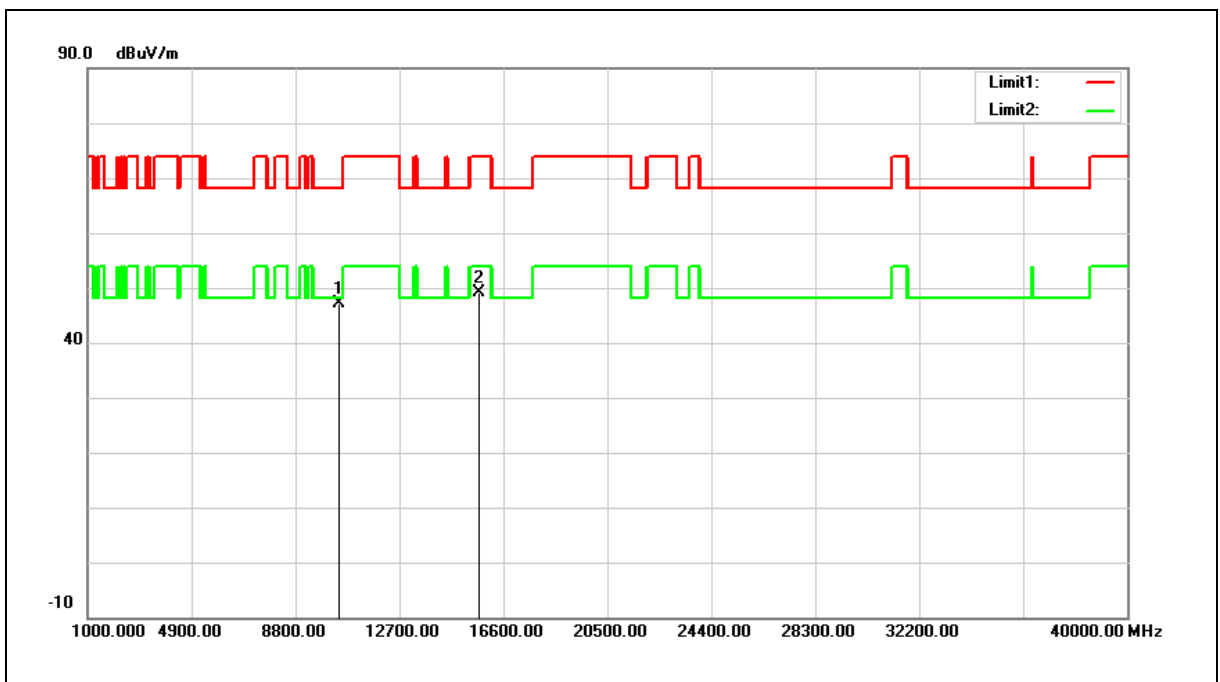


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	35.12	11.95	47.07	68.20	-21.13	peak
2	15690.000	34.90	14.19	49.09	74.00	-24.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

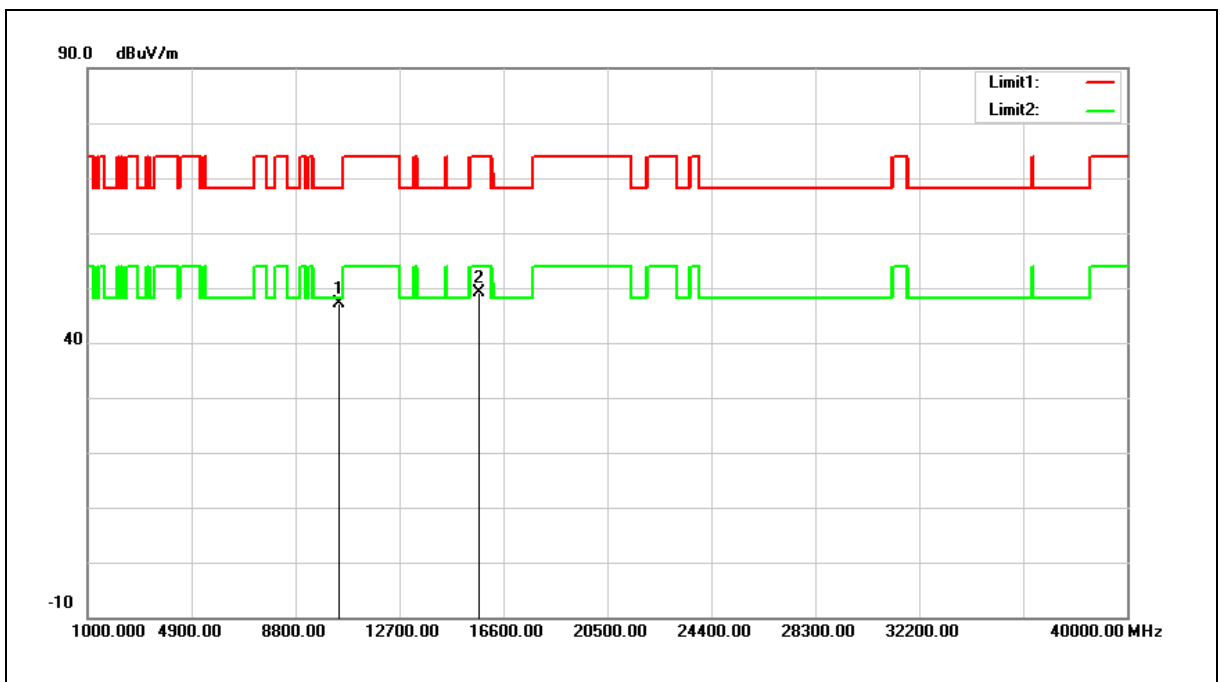


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	35.14	11.95	47.09	68.20	-21.11	peak
2	15690.000	34.84	14.19	49.03	74.00	-24.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

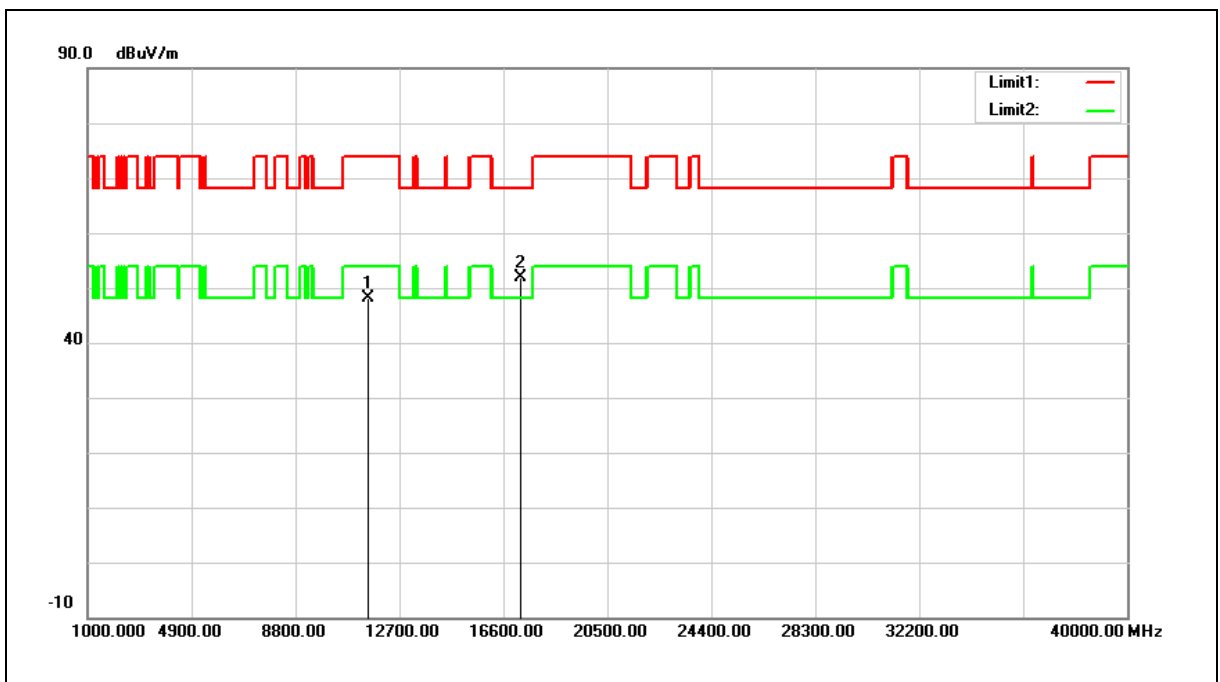


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	35.51	12.68	48.19	74.00	-25.81	peak
2	17265.000	33.05	18.72	51.77	68.20	-16.43	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

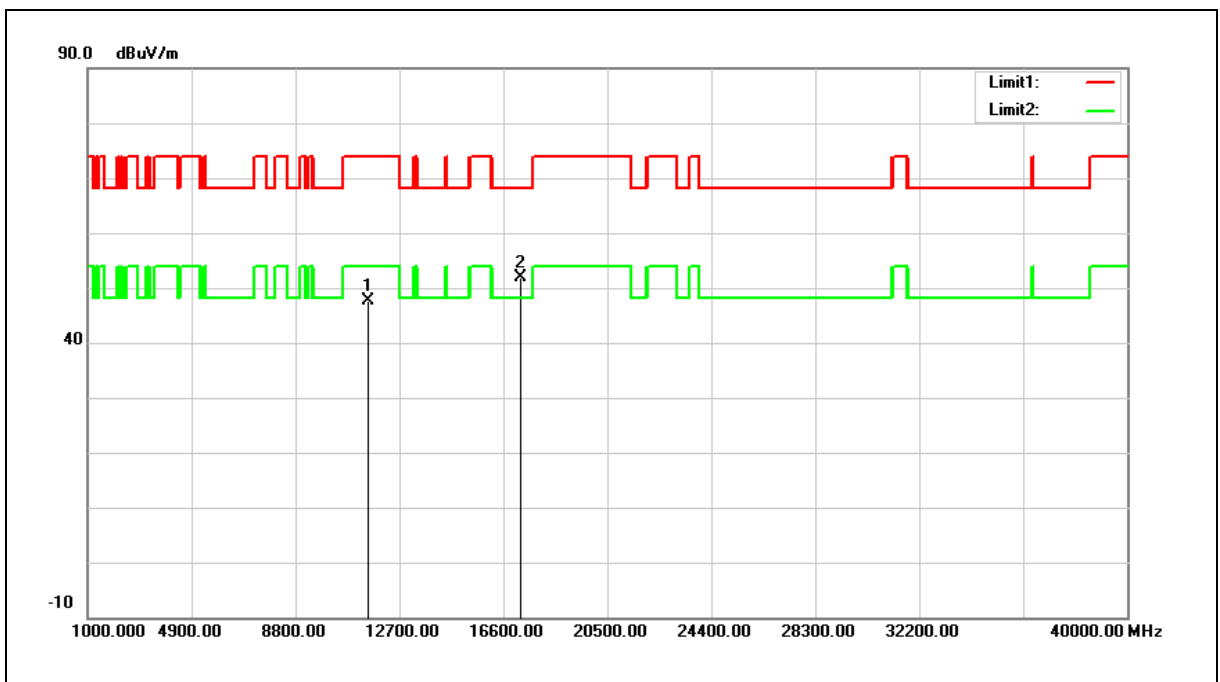


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	35.03	12.68	47.71	74.00	-26.29	peak
2	17265.000	33.15	18.72	51.87	68.20	-16.33	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

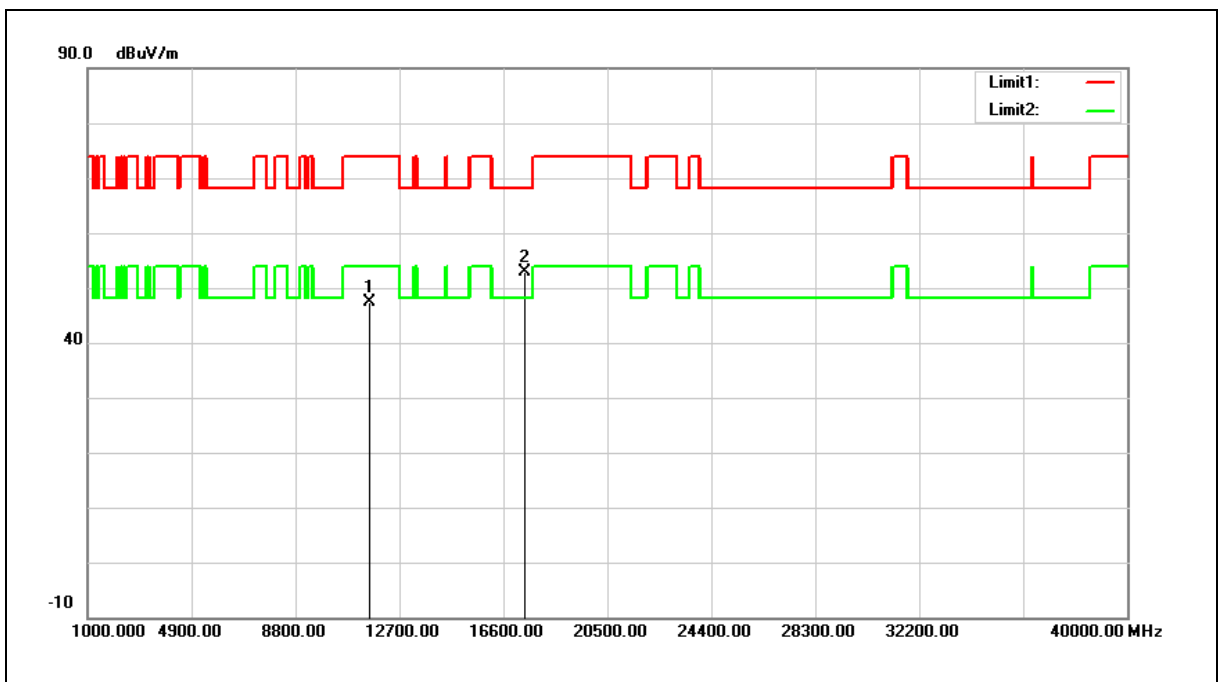


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	34.82	12.56	47.38	74.00	-26.62	peak
2	17385.000	33.24	19.52	52.76	68.20	-15.44	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

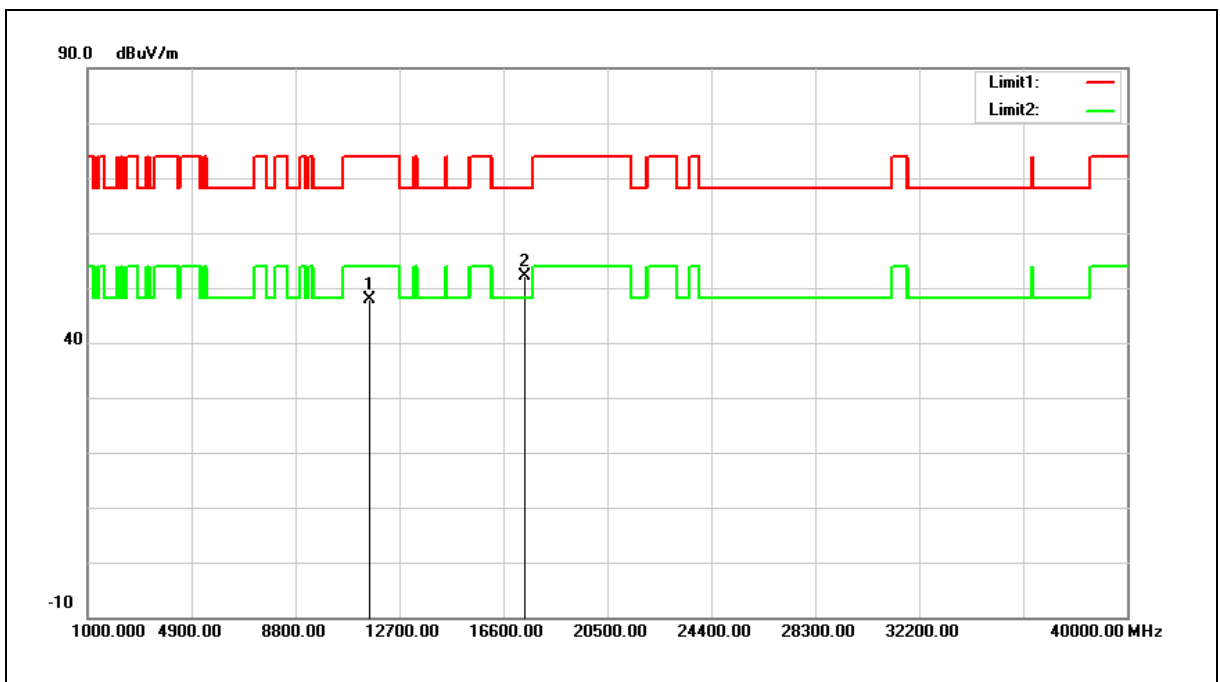


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	35.24	12.56	47.80	74.00	-26.20	peak
2	17385.000	32.73	19.52	52.25	68.20	-15.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

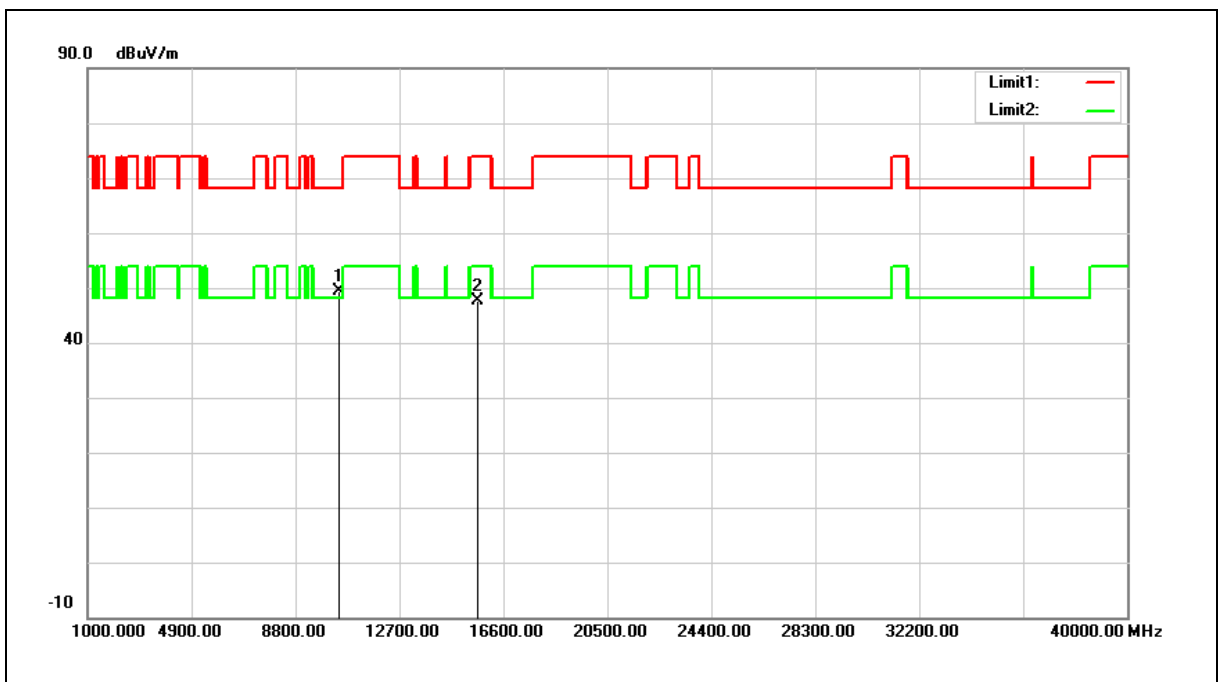


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	37.46	11.85	49.31	68.20	-18.89	peak
2	15630.000	33.39	14.33	47.72	74.00	-26.28	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

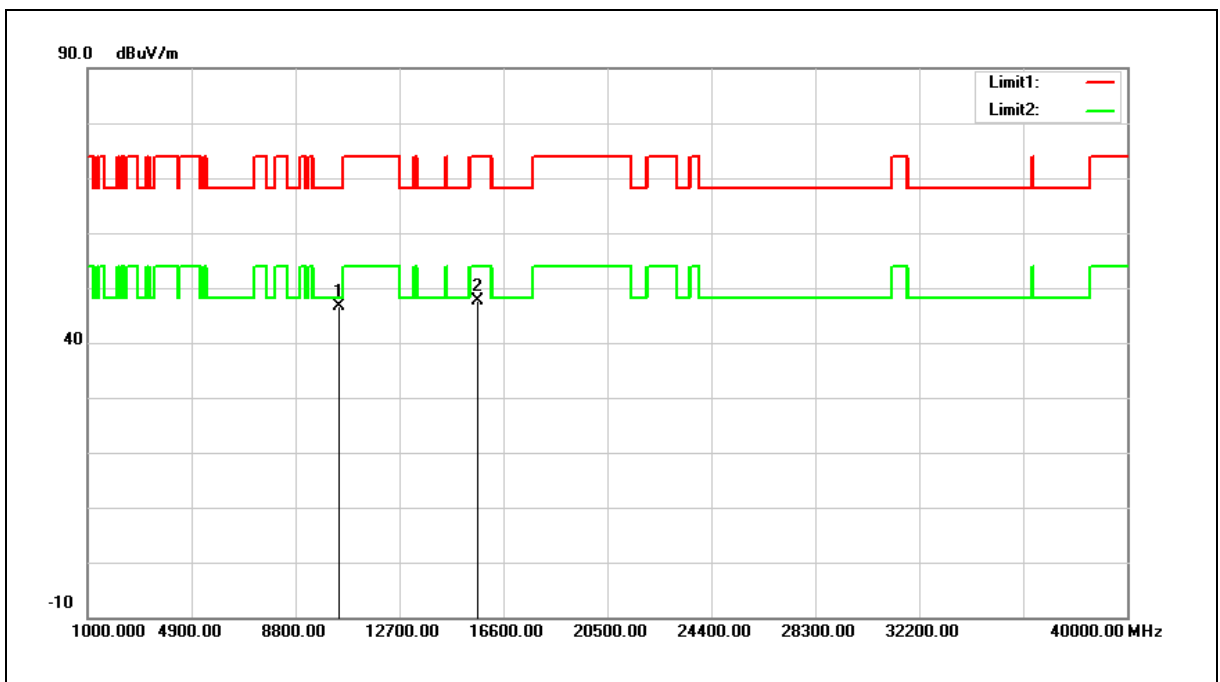


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	34.72	11.85	46.57	68.20	-21.63	peak
2	15630.000	33.42	14.33	47.75	74.00	-26.25	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

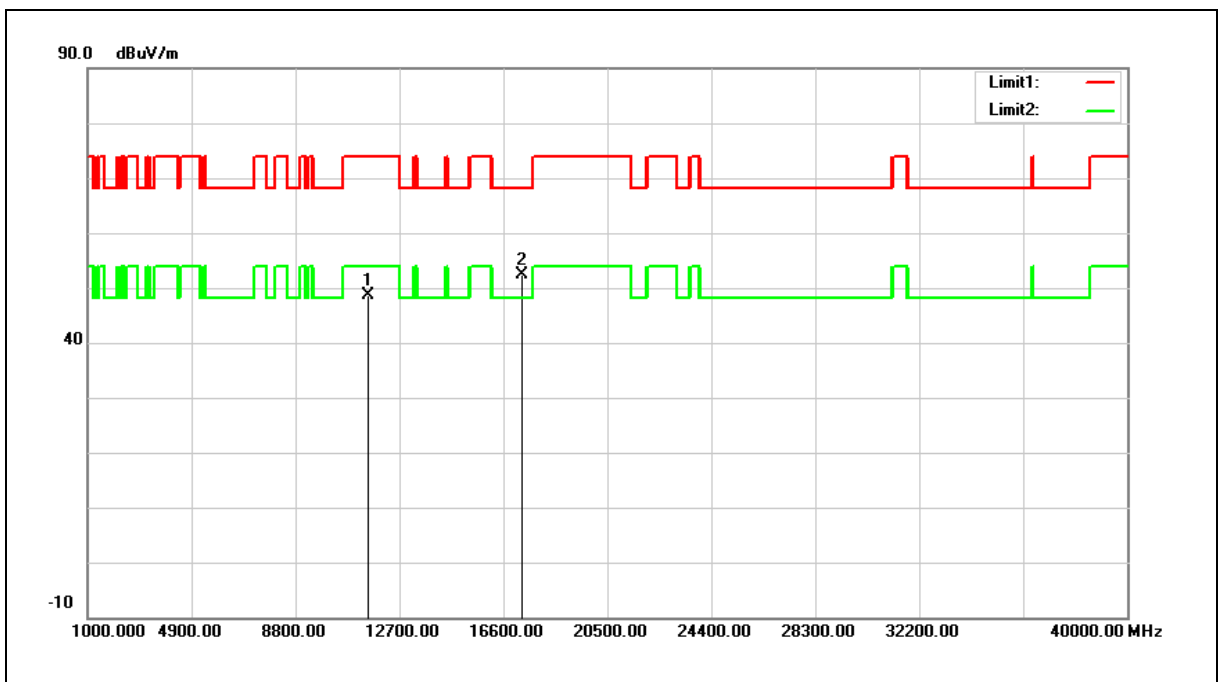


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	35.97	12.62	48.59	74.00	-25.41	peak
2	17325.000	33.37	19.12	52.49	68.20	-15.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

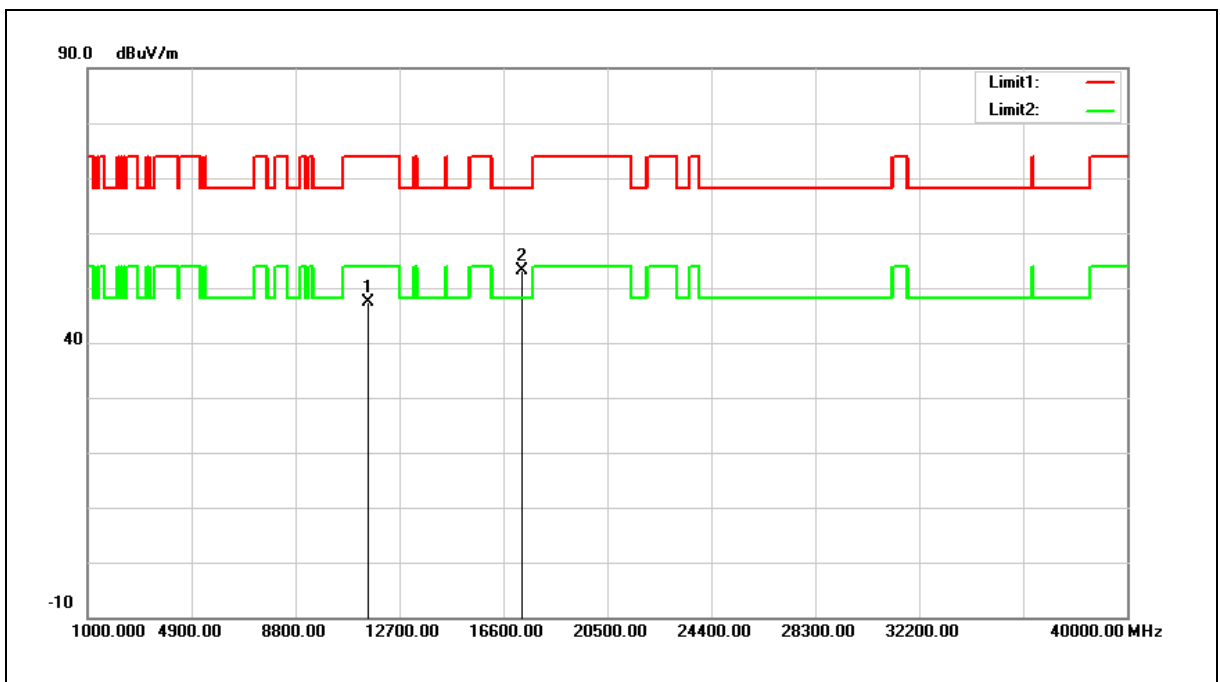


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	34.85	12.62	47.47	74.00	-26.53	peak
2	17325.000	33.92	19.12	53.04	68.20	-15.16	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting		
	(WLAN 2.4 GHz + WLAN 5 GHz)		
Ant.Polar.:	Horizontal		

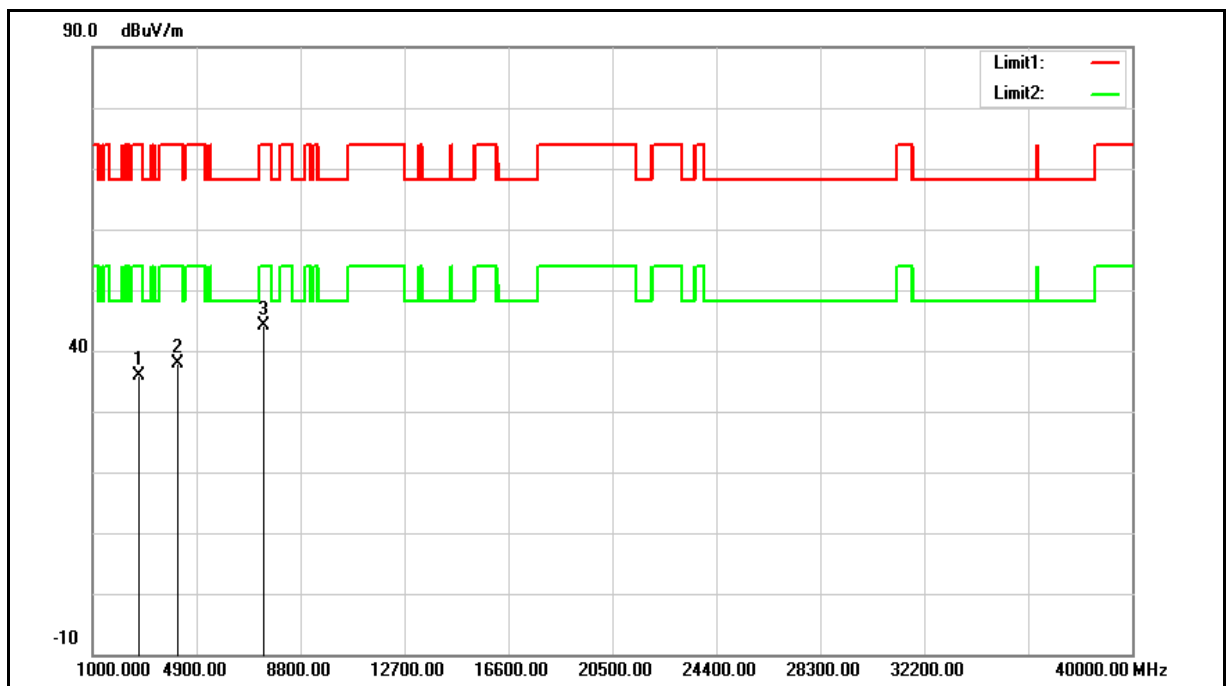


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2751.000	42.19	-6.25	35.94	74.00	-38.06	peak
2	4213.000	40.90	-2.92	37.98	74.00	-36.02	peak
3	7409.000	37.58	6.46	44.04	74.00	-29.96	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting		
	(WLAN 2.4 GHz + WLAN 5 GHz)		
Ant.Polar.:	Vertical		

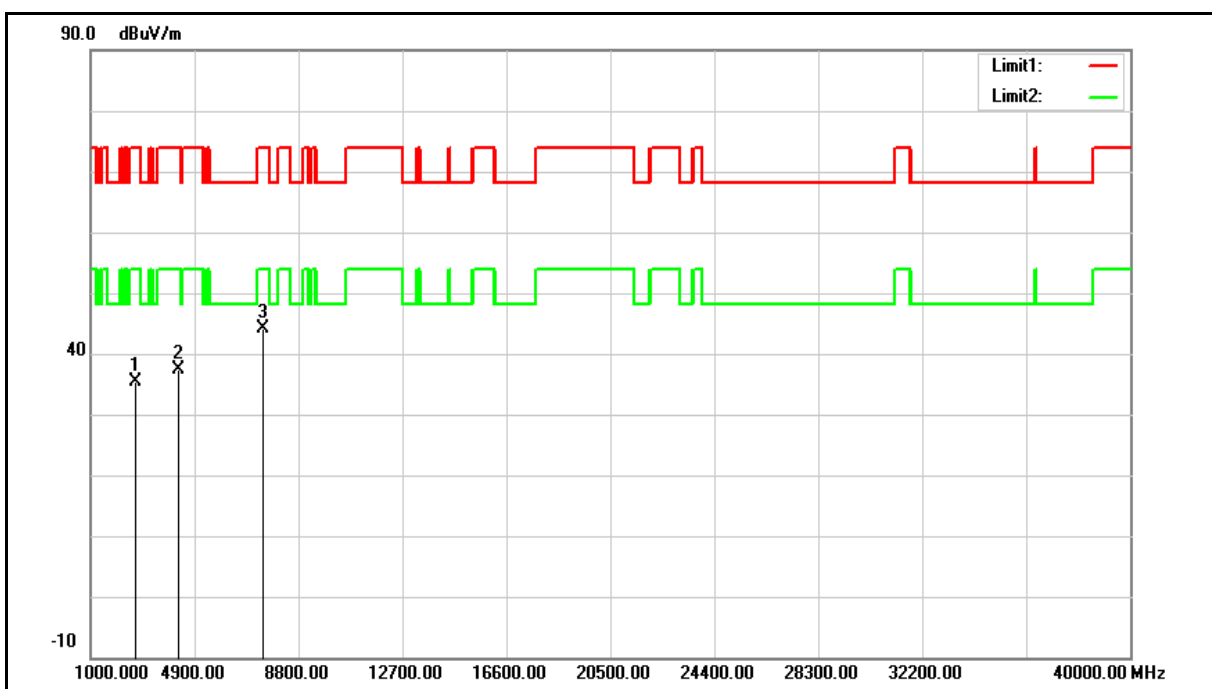


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2666.000	41.99	-6.60	35.39	74.00	-38.61	peak
2	4298.000	40.11	-2.69	37.42	74.00	-36.58	peak
3	7477.000	37.55	6.70	44.25	74.00	-29.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 19		
Ant.Polar.:	Horizontal		
Description:			

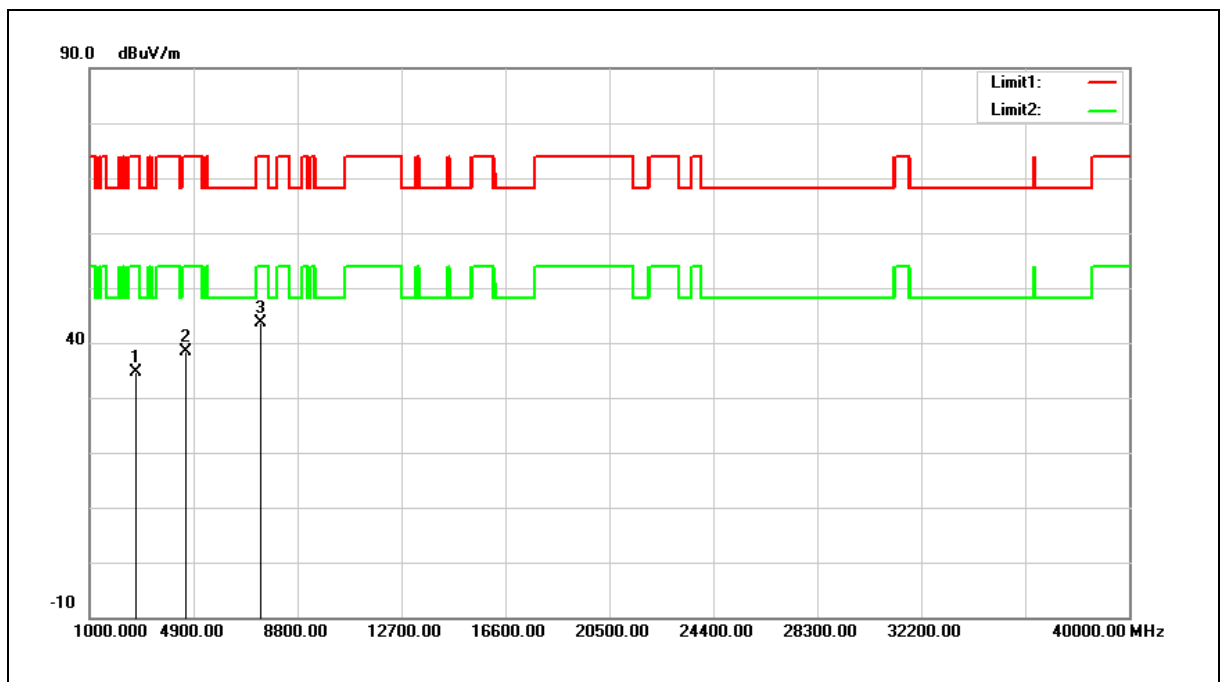


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2717.000	40.96	-6.39	34.57	74.00	-39.43	peak
2	4587.000	40.26	-1.90	38.36	74.00	-35.64	peak
3	7443.000	37.04	6.57	43.61	74.00	-30.39	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 19		
Ant.Polar.:	Vertical		
Description:			

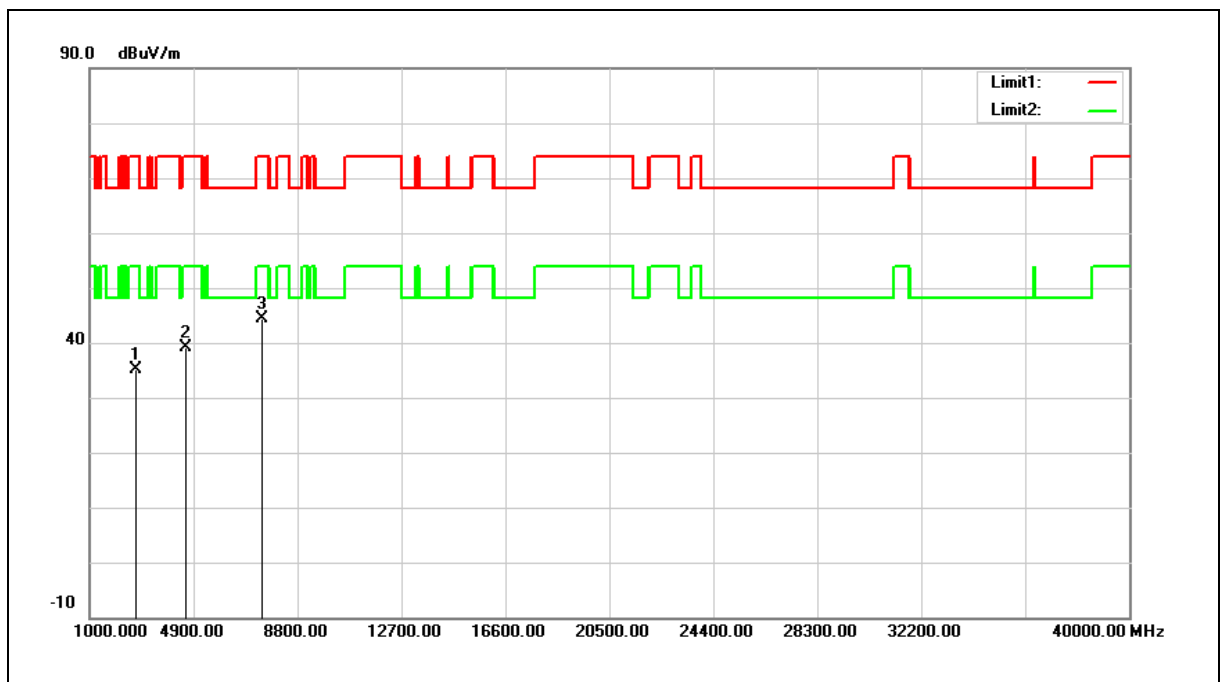

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2751.000	41.36	-6.25	35.11	74.00	-38.89	peak
2	4587.000	40.96	-1.90	39.06	74.00	-34.94	peak
3	7494.000	37.63	6.75	44.38	74.00	-29.62	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

頻帶邊緣

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

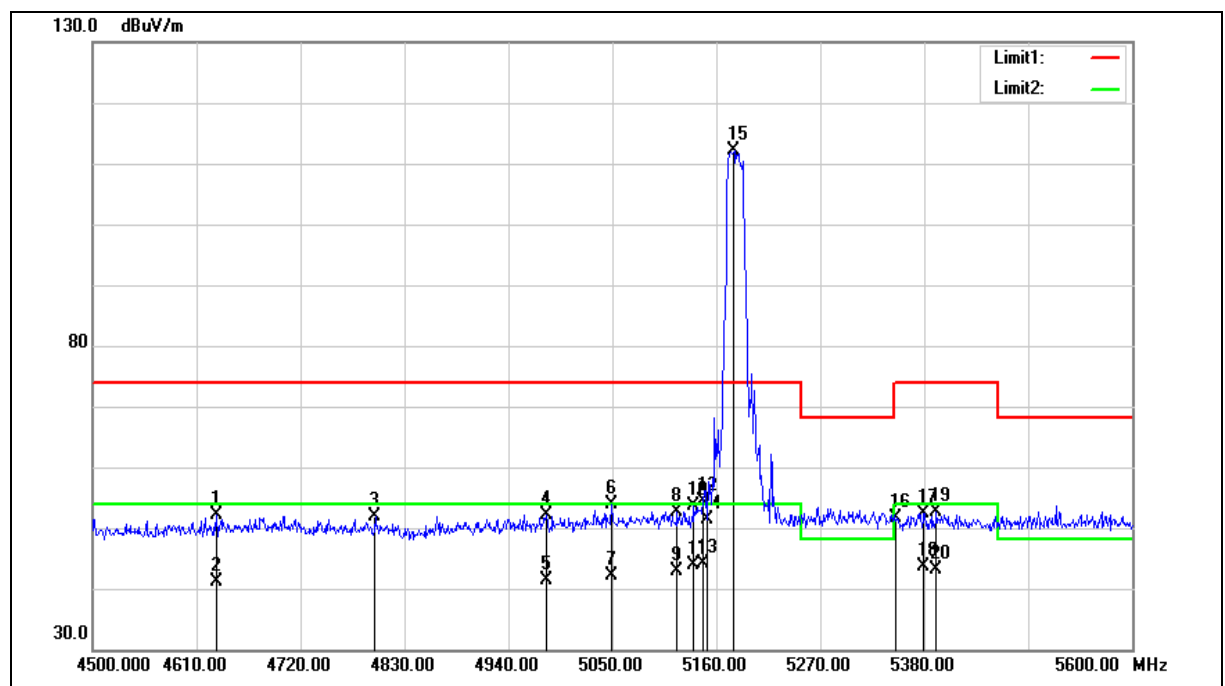

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4630.900	53.97	-1.78	52.19	74.00	-21.81	peak
2	4630.900	42.81	-1.78	41.03	54.00	-12.97	AVG
3	4799.200	53.24	-1.32	51.92	74.00	-22.08	peak
4	4979.600	52.97	-0.83	52.14	74.00	-21.86	peak
5	4979.600	42.31	-0.83	41.48	54.00	-12.52	AVG
6	5048.900	54.61	-0.68	53.93	74.00	-20.07	peak
7	5048.900	42.73	-0.68	42.05	54.00	-11.95	AVG
8	5118.200	53.27	-0.54	52.73	74.00	-21.27	peak
9	5118.200	43.49	-0.54	42.95	54.00	-11.05	AVG
10	5135.800	54.09	-0.50	53.59	74.00	-20.41	peak
11	5135.800	44.26	-0.50	43.76	54.00	-10.24	AVG
12	5145.700	54.79	-0.48	54.31	74.00	-19.69	peak
13	5145.700	44.57	-0.48	44.09	54.00	-9.91	AVG
14	5150.000	51.77	-0.48	51.29	74.00	-22.71	peak
15	5178.700	112.57	-0.42	112.15	--	--	peak
16	5350.000	51.68	-0.08	51.60	74.00	-22.40	peak
17	5378.900	52.51	-0.03	52.48	74.00	-21.52	peak
18	5378.900	43.54	-0.03	43.51	54.00	-10.49	AVG
19	5392.100	52.67	0.00	52.67	74.00	-21.33	peak
20	5392.100	43.03	0.00	43.03	54.00	-10.97	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

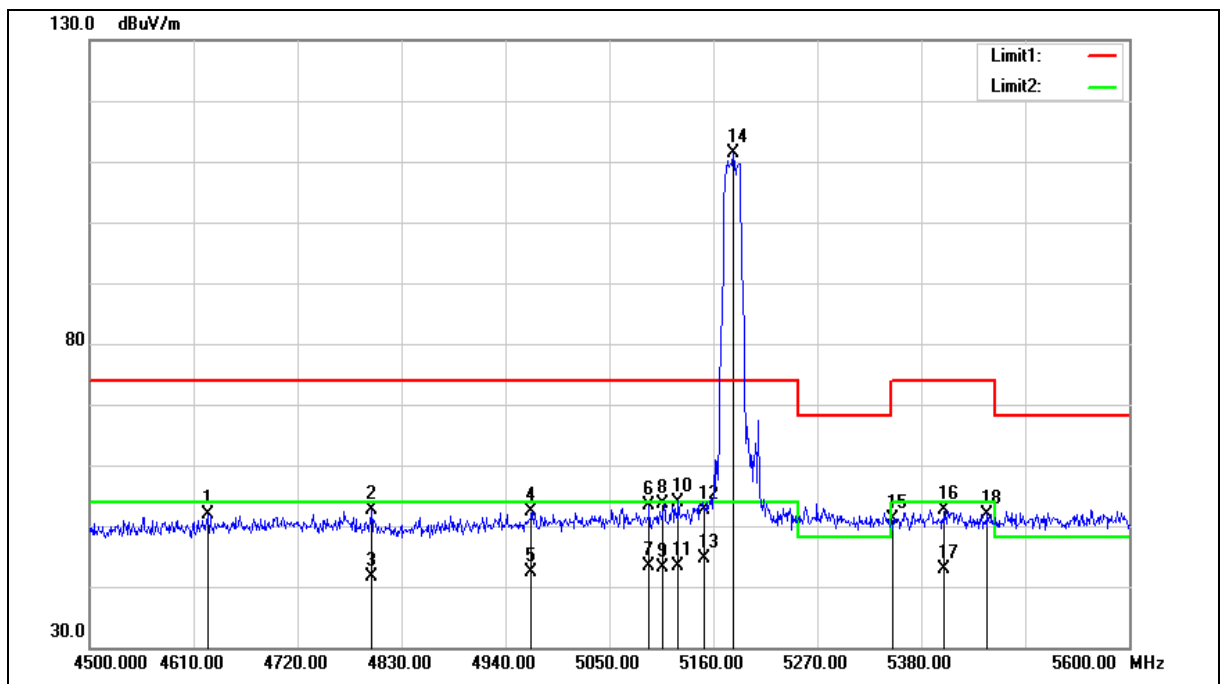

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4625.400	53.80	-1.80	52.00	74.00	-22.00	peak
2	4798.100	54.05	-1.32	52.73	74.00	-21.27	peak
3	4798.100	42.87	-1.32	41.55	54.00	-12.45	AVG
4	4967.500	53.22	-0.87	52.35	74.00	-21.65	peak
5	4967.500	43.20	-0.87	42.33	54.00	-11.67	AVG
6	5091.800	54.02	-0.60	53.42	74.00	-20.58	peak
7	5091.800	43.92	-0.60	43.32	54.00	-10.68	AVG
8	5107.200	54.29	-0.56	53.73	74.00	-20.27	peak
9	5107.200	43.77	-0.56	43.21	54.00	-10.79	AVG
10	5122.600	54.53	-0.53	54.00	74.00	-20.00	peak
11	5122.600	44.00	-0.53	43.47	54.00	-10.53	AVG
12	5150.000	53.11	-0.48	52.63	74.00	-21.37	peak
13	5150.000	45.09	-0.48	44.61	54.00	-9.39	AVG
14	5180.900	111.87	-0.42	111.45	--	--	peak
15	5350.000	51.32	-0.08	51.24	74.00	-22.76	peak
16	5404.200	52.69	0.02	52.71	74.00	-21.29	peak
17	5404.200	42.74	0.02	42.76	54.00	-11.24	AVG
18	5449.300	51.87	0.12	51.99	74.00	-22.01	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

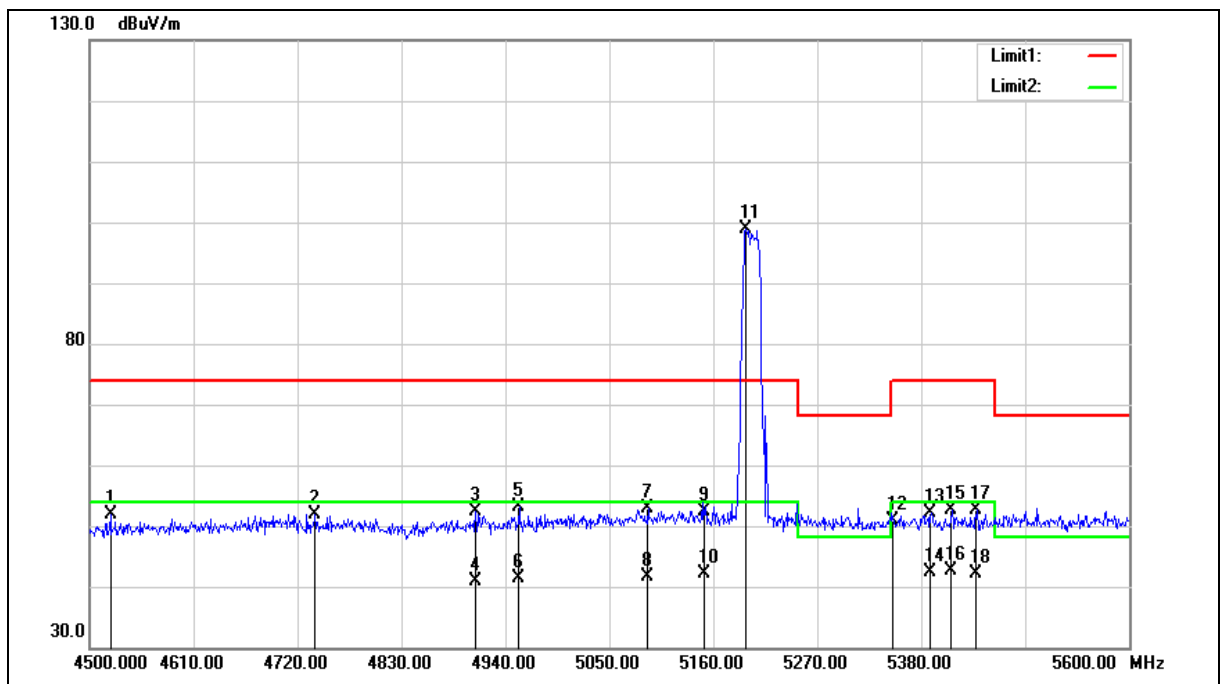

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4522.000	53.93	-2.08	51.85	74.00	-22.15	peak
2	4738.700	53.41	-1.49	51.92	74.00	-22.08	peak
3	4908.100	53.32	-1.02	52.30	74.00	-21.70	peak
4	4908.100	41.97	-1.02	40.95	54.00	-13.05	AVG
5	4954.300	54.05	-0.89	53.16	74.00	-20.84	peak
6	4954.300	42.18	-0.89	41.29	54.00	-12.71	AVG
7	5090.700	53.38	-0.60	52.78	74.00	-21.22	peak
8	5090.700	42.16	-0.60	41.56	54.00	-12.44	AVG
9	5150.000	52.95	-0.48	52.47	74.00	-21.53	peak
10	5150.000	42.58	-0.48	42.10	54.00	-11.90	AVG
11	5194.100	99.17	-0.39	98.78	--	--	peak
12	5350.000	51.03	-0.08	50.95	74.00	-23.05	peak
13	5389.900	52.12	0.00	52.12	74.00	-21.88	peak
14	5389.900	42.39	0.00	42.39	54.00	-11.61	AVG
15	5411.900	52.51	0.04	52.55	74.00	-21.45	peak
16	5411.900	42.58	0.04	42.62	54.00	-11.38	AVG
17	5438.300	52.47	0.09	52.56	74.00	-21.44	peak
18	5438.300	42.13	0.09	42.22	54.00	-11.78	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

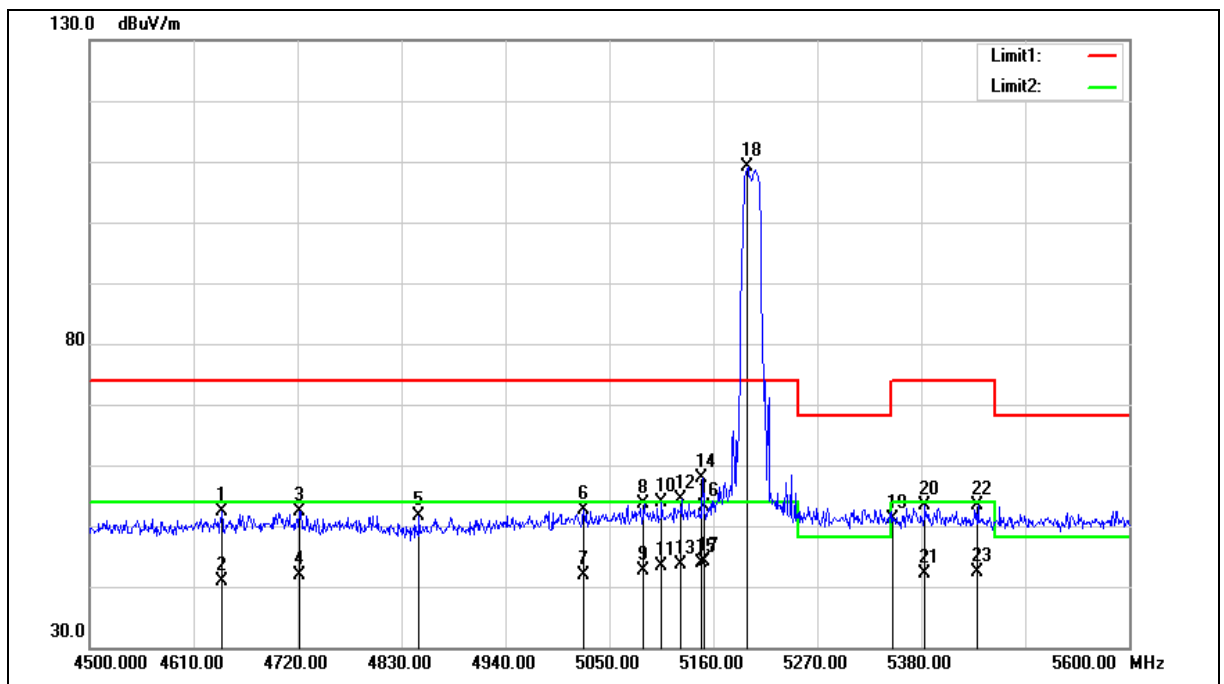

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4639.700	54.03	-1.76	52.27	74.00	-21.73	peak
2	4639.700	42.60	-1.76	40.84	54.00	-13.16	AVG
3	4722.200	53.98	-1.53	52.45	74.00	-21.55	peak
4	4722.200	43.33	-1.53	41.80	54.00	-12.20	AVG
5	4848.700	52.78	-1.18	51.60	74.00	-22.40	peak
6	5022.500	53.38	-0.72	52.66	74.00	-21.34	peak
7	5022.500	42.54	-0.72	41.82	54.00	-12.18	AVG
8	5086.300	54.16	-0.60	53.56	74.00	-20.44	peak
9	5086.300	43.15	-0.60	42.55	54.00	-11.45	AVG
10	5105.000	54.42	-0.57	53.85	74.00	-20.15	peak
11	5105.000	44.00	-0.57	43.43	54.00	-10.57	AVG
12	5125.900	54.89	-0.52	54.37	74.00	-19.63	peak
13	5125.900	44.25	-0.52	43.73	54.00	-10.27	AVG
14	5147.900	58.32	-0.48	57.84	74.00	-16.16	peak
15	5147.900	44.44	-0.48	43.96	54.00	-10.04	AVG
16	5150.000	53.54	-0.48	53.06	74.00	-20.94	peak
17	5150.000	44.57	-0.48	44.09	54.00	-9.91	AVG
18	5196.300	109.46	-0.38	109.08	--	--	peak
19	5350.000	51.11	-0.08	51.03	74.00	-22.97	peak
20	5383.300	53.30	-0.02	53.28	74.00	-20.72	peak
21	5383.300	42.17	-0.02	42.15	54.00	-11.85	AVG
22	5439.400	53.28	0.09	53.37	74.00	-20.63	peak
23	5439.400	42.18	0.09	42.27	54.00	-11.73	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

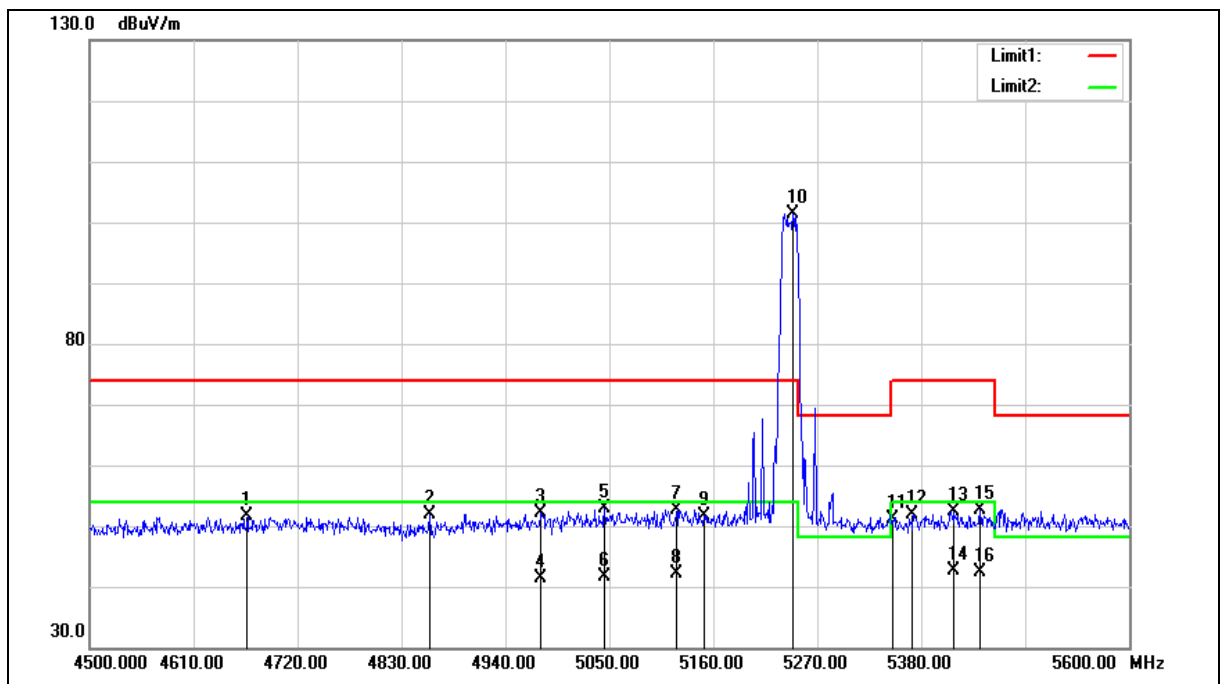

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4667.200	53.40	-1.69	51.71	74.00	-22.29	peak
2	4859.700	53.03	-1.16	51.87	74.00	-22.13	peak
3	4977.400	52.98	-0.83	52.15	74.00	-21.85	peak
4	4977.400	42.21	-0.83	41.38	54.00	-12.62	AVG
5	5044.500	53.45	-0.68	52.77	74.00	-21.23	peak
6	5044.500	42.34	-0.68	41.66	54.00	-12.34	AVG
7	5121.500	53.12	-0.53	52.59	74.00	-21.41	peak
8	5121.500	42.65	-0.53	42.12	54.00	-11.88	AVG
9	5150.000	52.03	-0.48	51.55	74.00	-22.45	peak
10	5243.600	101.71	-0.29	101.42	--	--	peak
11	5350.000	51.23	-0.08	51.15	74.00	-22.85	peak
12	5371.200	51.79	-0.03	51.76	74.00	-22.24	peak
13	5414.100	52.28	0.05	52.33	74.00	-21.67	peak
14	5414.100	42.48	0.05	42.53	54.00	-11.47	AVG
15	5441.600	52.50	0.09	52.59	74.00	-21.41	peak
16	5441.600	42.29	0.09	42.38	54.00	-11.62	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

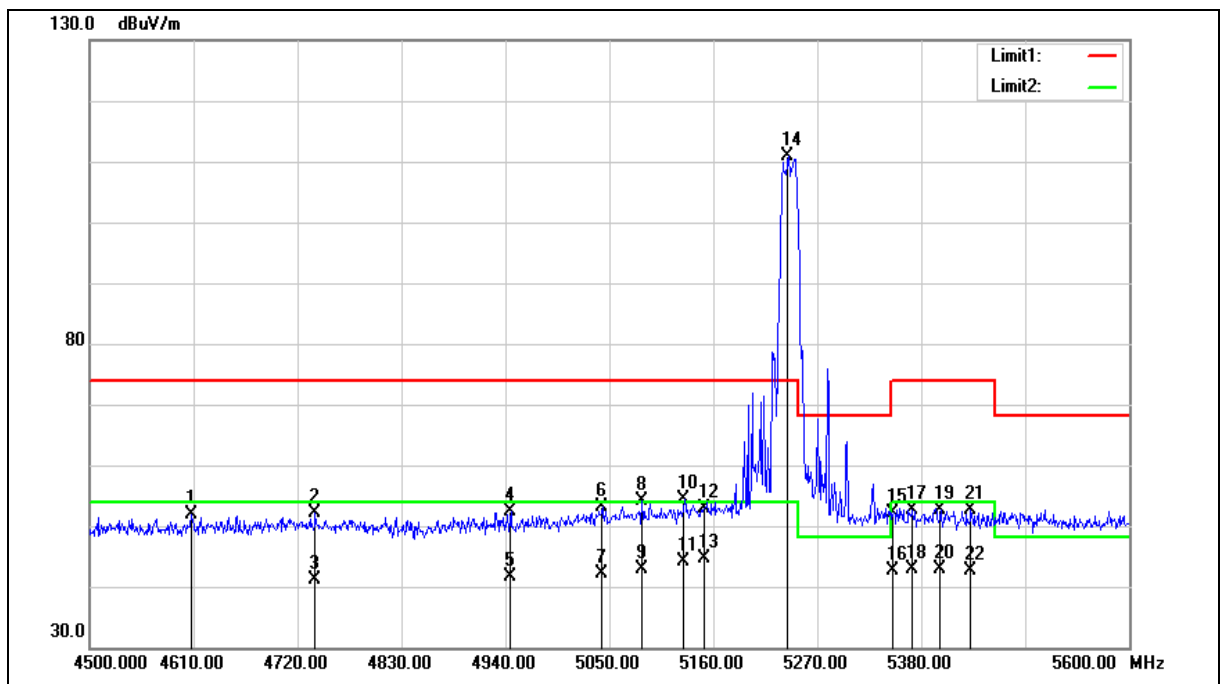

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4607.800	53.68	-1.85	51.83	74.00	-22.17	peak
2	4738.700	53.65	-1.49	52.16	74.00	-21.84	peak
3	4738.700	42.69	-1.49	41.20	54.00	-12.80	AVG
4	4945.500	53.24	-0.93	52.31	74.00	-21.69	peak
5	4945.500	42.60	-0.93	41.67	54.00	-12.33	AVG
6	5042.300	53.71	-0.69	53.02	74.00	-20.98	peak
7	5042.300	42.77	-0.69	42.08	54.00	-11.92	AVG
8	5084.100	54.66	-0.60	54.06	74.00	-19.94	peak
9	5084.100	43.47	-0.60	42.87	54.00	-11.13	AVG
10	5129.200	54.87	-0.52	54.35	74.00	-19.65	peak
11	5129.200	44.55	-0.52	44.03	54.00	-9.97	AVG
12	5150.000	53.40	-0.48	52.92	74.00	-21.08	peak
13	5150.000	45.05	-0.48	44.57	54.00	-9.43	AVG
14	5239.200	111.15	-0.30	110.85	--	--	peak
15	5350.000	52.32	-0.08	52.24	74.00	-21.76	peak
16	5350.000	42.62	-0.08	42.54	54.00	-11.46	AVG
17	5370.100	52.70	-0.03	52.67	74.00	-21.33	peak
18	5370.100	42.84	-0.03	42.81	54.00	-11.19	AVG
19	5399.800	52.63	0.02	52.65	74.00	-21.35	peak
20	5399.800	42.86	0.02	42.88	54.00	-11.12	AVG
21	5431.700	52.65	0.09	52.74	74.00	-21.26	peak
22	5431.700	42.49	0.09	42.58	54.00	-11.42	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

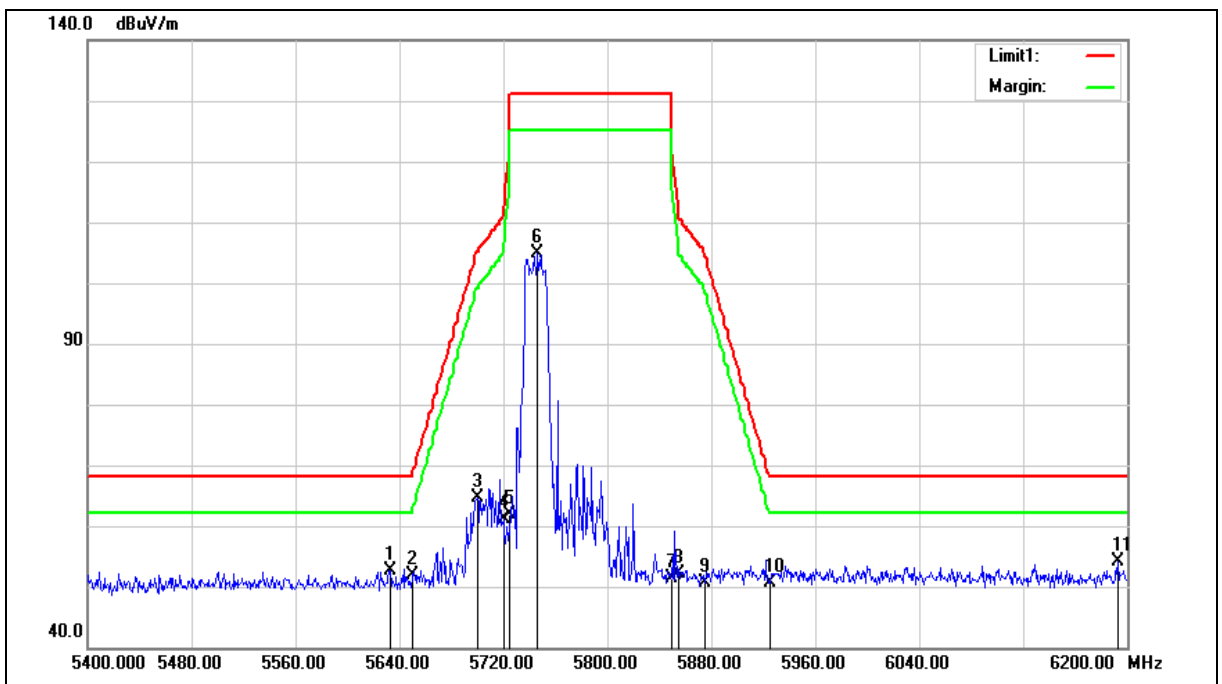

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5632.800	52.08	0.58	52.66	68.20	-15.54	peak
2	5650.000	51.17	0.62	51.79	68.20	-16.41	peak
3	5700.000	63.96	0.75	64.71	105.20	-40.49	peak
4	5720.000	60.21	0.81	61.02	110.80	-49.78	peak
5	5725.000	61.17	0.82	61.99	122.20	-60.21	peak
6	5746.400	103.88	0.88	104.76	--	--	peak
7	5850.000	50.29	1.17	51.46	122.20	-70.74	peak
8	5855.000	51.01	1.18	52.19	110.80	-58.61	peak
9	5875.000	49.46	1.23	50.69	105.20	-54.51	peak
10	5925.000	49.28	1.37	50.65	68.20	-17.55	peak
11	6192.800	51.83	2.25	54.08	68.20	-14.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

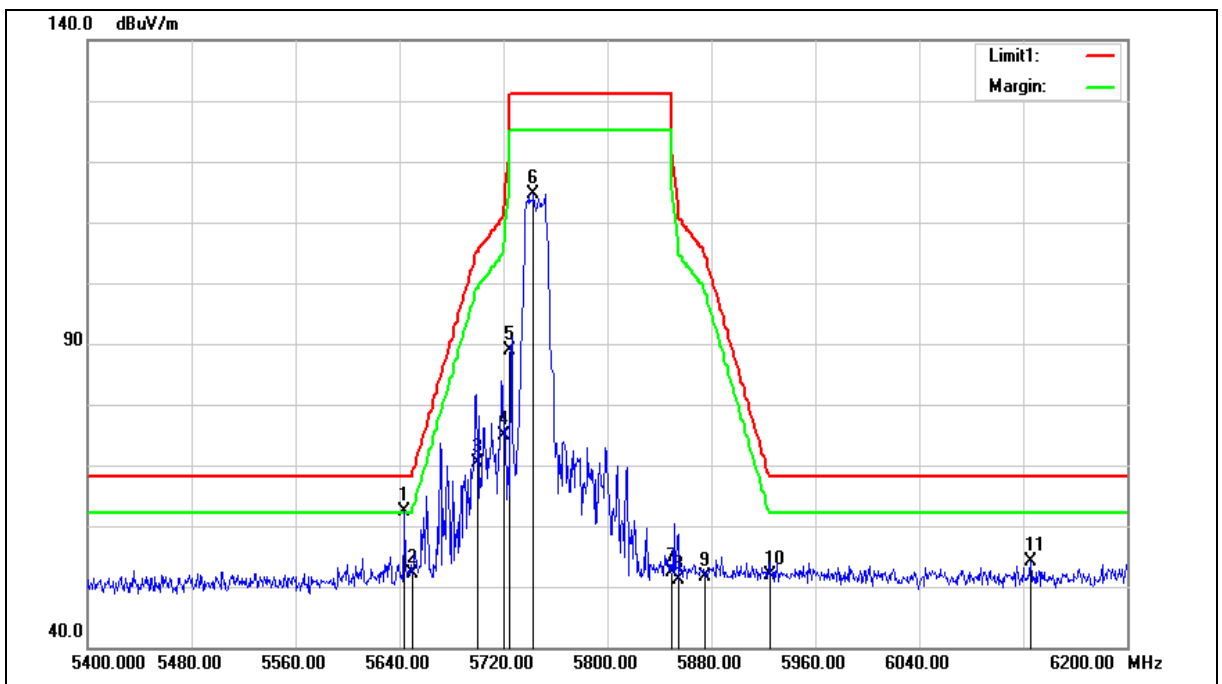

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5644.000	61.75	0.60	62.35	68.20	-5.85	peak
2	5650.000	51.61	0.62	52.23	68.20	-15.97	peak
3	5700.000	69.64	0.75	70.39	105.20	-34.81	peak
4	5720.000	74.01	0.81	74.82	110.80	-35.98	peak
5	5725.000	88.09	0.82	88.91	122.20	-33.29	peak
6	5743.200	113.80	0.87	114.67	--	--	peak
7	5850.000	51.26	1.17	52.43	122.20	-69.77	peak
8	5855.000	50.07	1.18	51.25	110.80	-59.55	peak
9	5875.000	50.39	1.23	51.62	105.20	-53.58	peak
10	5925.000	50.57	1.37	51.94	68.20	-16.26	peak
11	6125.600	52.00	2.02	54.02	68.20	-14.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

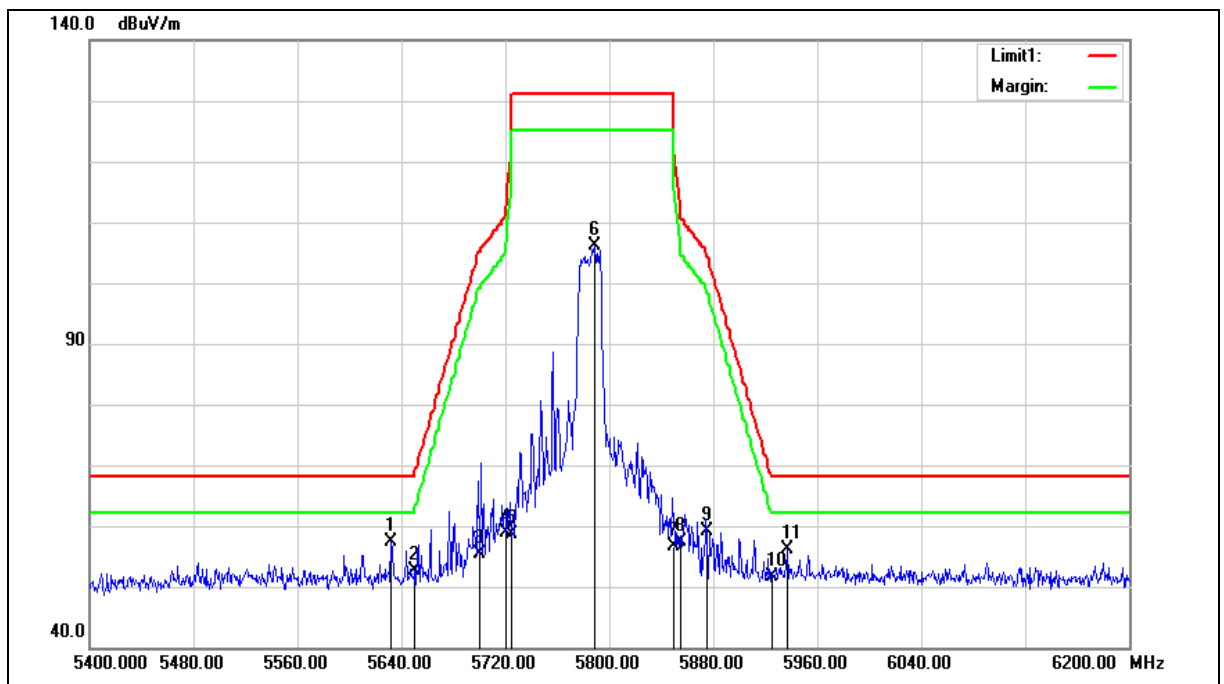

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5632.000	56.77	0.58	57.35	68.20	-10.85	peak
2	5650.000	51.99	0.62	52.61	68.20	-15.59	peak
3	5700.000	54.73	0.75	55.48	105.20	-49.72	peak
4	5720.000	58.19	0.81	59.00	110.80	-51.80	peak
5	5725.000	57.88	0.82	58.70	122.20	-63.50	peak
6	5788.800	105.20	0.99	106.19	--	--	peak
7	5850.000	55.55	1.17	56.72	122.20	-65.48	peak
8	5855.000	56.21	1.18	57.39	110.80	-53.41	peak
9	5875.000	57.97	1.23	59.20	105.20	-46.00	peak
10	5925.000	50.25	1.37	51.62	68.20	-16.58	peak
11	5936.800	54.76	1.40	56.16	68.20	-12.04	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

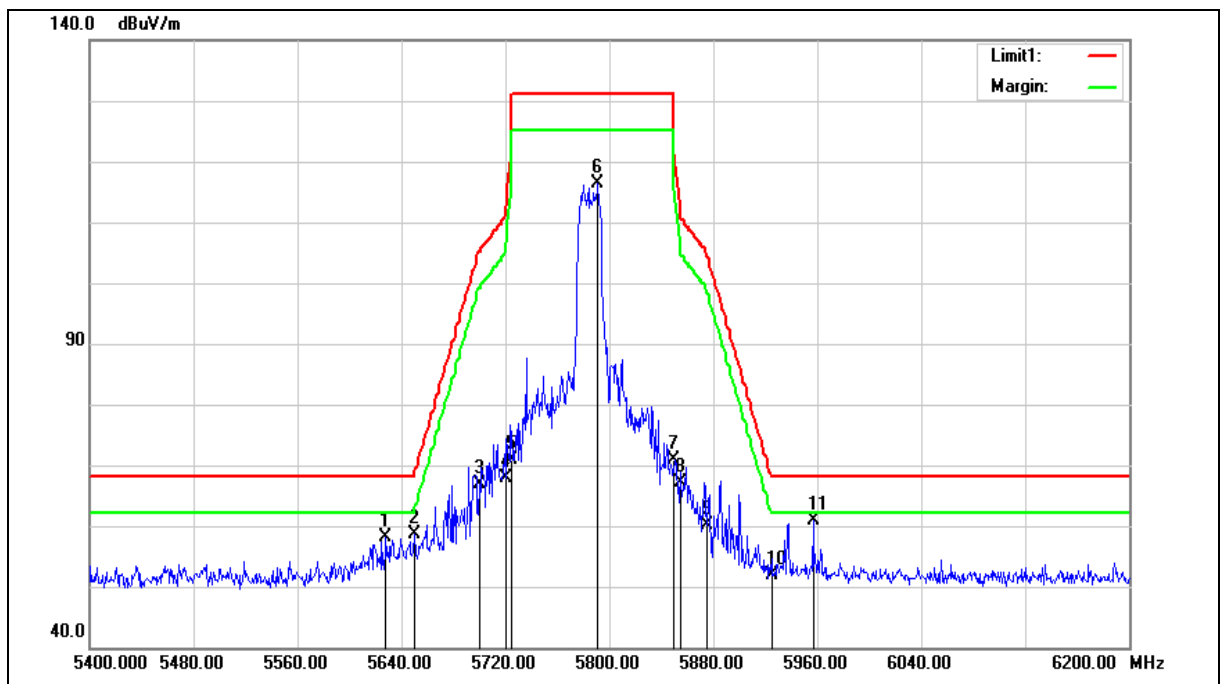

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5628.000	57.65	0.55	58.20	68.20	-10.00	peak
2	5650.000	57.97	0.62	58.59	68.20	-9.61	peak
3	5700.000	66.19	0.75	66.94	105.20	-38.26	peak
4	5720.000	67.10	0.81	67.91	110.80	-42.89	peak
5	5725.000	70.02	0.82	70.84	122.20	-51.36	peak
6	5791.200	115.48	1.01	116.49	--	--	peak
7	5850.000	69.69	1.17	70.86	122.20	-51.34	peak
8	5855.000	65.83	1.18	67.01	110.80	-43.79	peak
9	5875.000	58.96	1.23	60.19	105.20	-45.01	peak
10	5925.000	50.60	1.37	51.97	68.20	-16.23	peak
11	5956.800	59.53	1.45	60.98	68.20	-7.22	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		

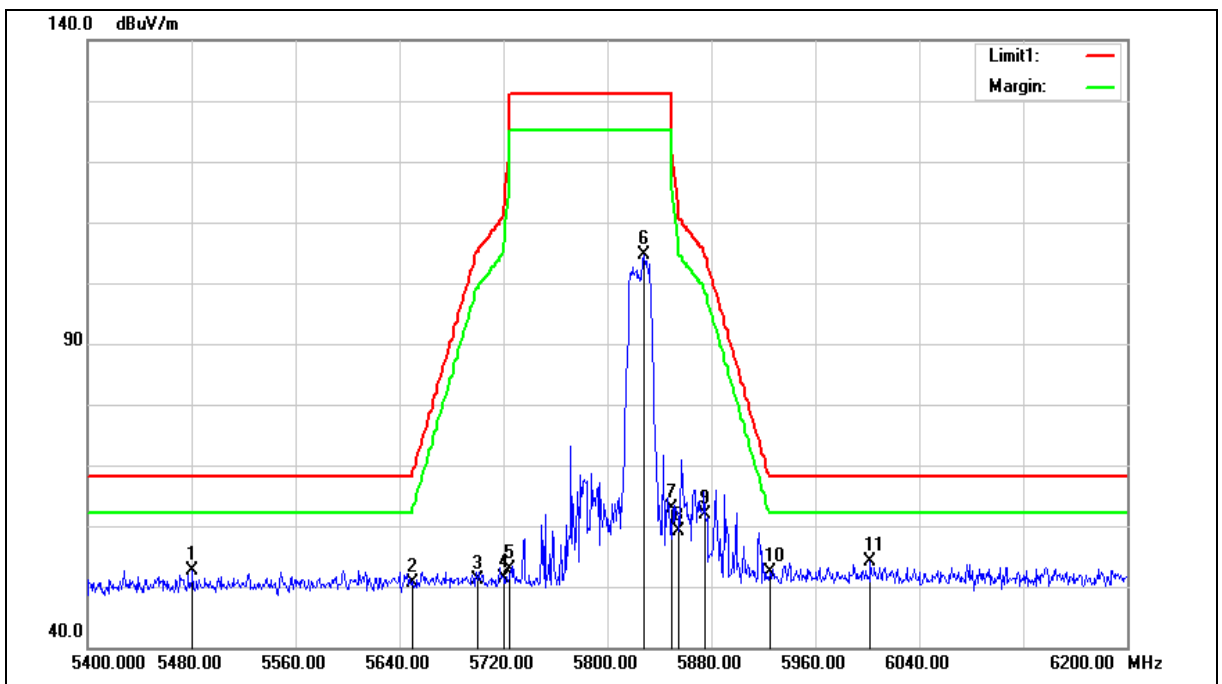

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 10		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5480.800	52.46	0.17	52.63	68.20	-15.57	peak
2	5650.000	50.01	0.62	50.63	68.20	-17.57	peak
3	5700.000	50.35	0.75	51.10	105.20	-54.10	peak
4	5720.000	50.52	0.81	51.33	110.80	-59.47	peak
5	5725.000	51.97	0.82	52.79	122.20	-69.41	peak
6	5828.000	103.44	1.10	104.54	--	--	peak
7	5850.000	61.74	1.17	62.91	122.20	-59.29	peak
8	5855.000	57.89	1.18	59.07	110.80	-51.73	peak
9	5875.000	60.60	1.23	61.83	105.20	-43.37	peak
10	5925.000	50.89	1.37	52.26	68.20	-15.94	peak
11	6002.400	52.44	1.58	54.02	68.20	-14.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		

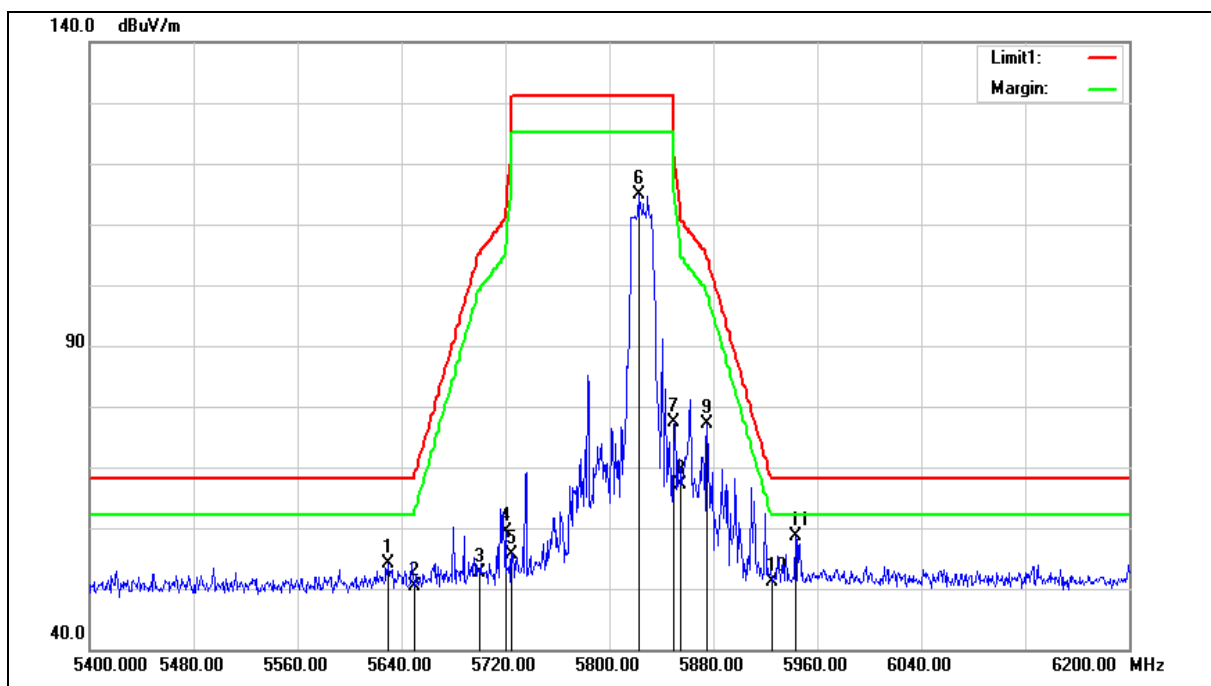

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 10		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5629.600	53.64	0.56	54.20	68.20	-14.00	peak
2	5650.000	49.88	0.62	50.50	68.20	-17.70	peak
3	5700.000	51.91	0.75	52.66	105.20	-52.54	peak
4	5720.000	58.67	0.81	59.48	110.80	-51.32	peak
5	5725.000	54.84	0.82	55.66	122.20	-66.54	peak
6	5822.400	113.88	1.10	114.98	--	--	peak
7	5850.000	76.23	1.17	77.40	122.20	-44.80	peak
8	5855.000	65.97	1.18	67.15	110.80	-43.65	peak
9	5875.000	75.86	1.23	77.09	105.20	-28.11	peak
10	5925.000	49.70	1.37	51.07	68.20	-17.13	peak
11	5943.200	57.26	1.42	58.68	68.20	-9.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

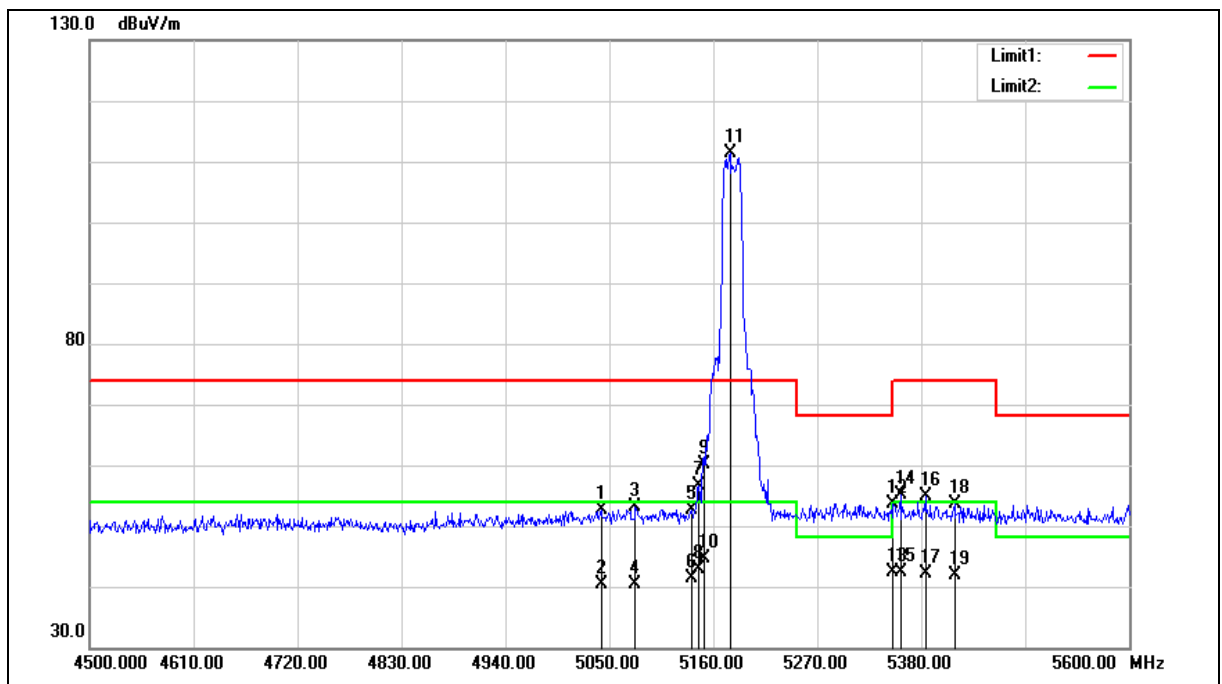

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5041.200	53.24	-0.69	52.55	74.00	-21.45	peak
2	5041.200	40.96	-0.69	40.27	54.00	-13.73	AVG
3	5077.500	53.67	-0.62	53.05	74.00	-20.95	peak
4	5077.500	40.97	-0.62	40.35	54.00	-13.65	AVG
5	5136.900	53.23	-0.50	52.73	74.00	-21.27	peak
6	5136.900	41.76	-0.50	41.26	54.00	-12.74	AVG
7	5144.600	57.03	-0.48	56.55	74.00	-17.45	peak
8	5144.600	43.37	-0.48	42.89	54.00	-11.11	AVG
9	5150.000	60.68	-0.48	60.20	74.00	-13.80	peak
10	5150.000	45.01	-0.48	44.53	54.00	-9.47	AVG
11	5177.600	111.81	-0.42	111.39	--	--	peak
12	5350.000	53.70	-0.08	53.62	74.00	-20.38	peak
13	5350.000	42.47	-0.08	42.39	54.00	-11.61	AVG
14	5358.000	55.11	-0.06	55.05	74.00	-18.95	peak
15	5358.000	42.41	-0.06	42.35	54.00	-11.65	AVG
16	5384.400	54.86	-0.01	54.85	74.00	-19.15	peak
17	5384.400	42.16	-0.01	42.15	54.00	-11.85	AVG
18	5415.200	53.68	0.05	53.73	74.00	-20.27	peak
19	5415.200	41.88	0.05	41.93	54.00	-12.07	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

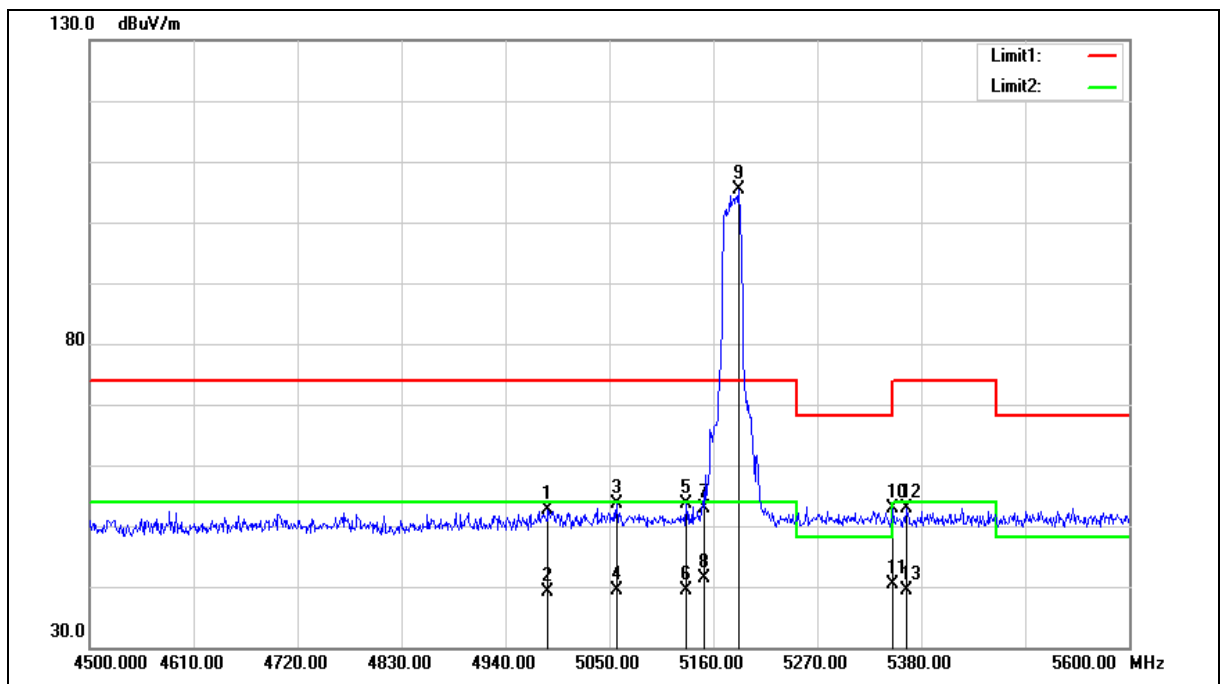

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4985.100	53.40	-0.82	52.58	74.00	-21.42	peak
2	4985.100	39.93	-0.82	39.11	54.00	-14.89	AVG
3	5057.700	54.16	-0.65	53.51	74.00	-20.49	peak
4	5057.700	39.92	-0.65	39.27	54.00	-14.73	AVG
5	5131.400	54.17	-0.51	53.66	74.00	-20.34	peak
6	5131.400	39.99	-0.51	39.48	54.00	-14.52	AVG
7	5150.000	53.32	-0.48	52.84	74.00	-21.16	peak
8	5150.000	41.79	-0.48	41.31	54.00	-12.69	AVG
9	5186.400	105.82	-0.40	105.42	--	--	peak
10	5350.000	52.86	-0.08	52.78	74.00	-21.22	peak
11	5350.000	40.49	-0.08	40.41	54.00	-13.59	AVG
12	5364.600	52.88	-0.05	52.83	74.00	-21.17	peak
13	5364.600	39.49	-0.05	39.44	54.00	-14.56	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

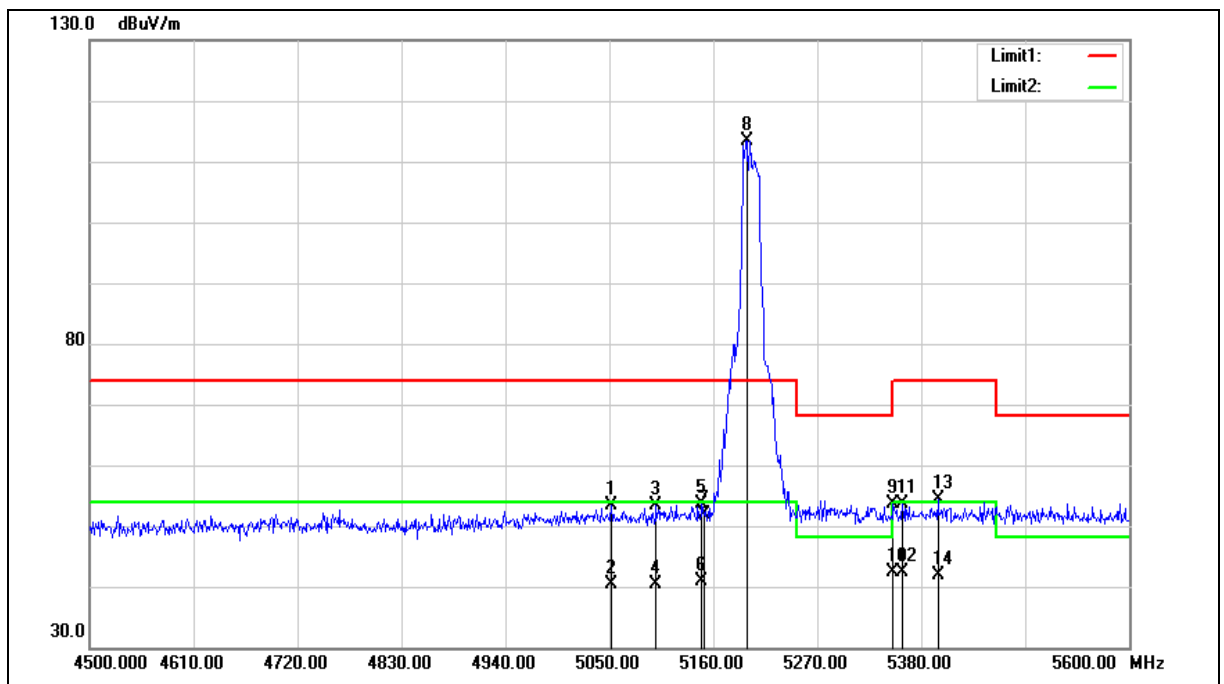

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5052.200	54.00	-0.66	53.34	74.00	-20.66	peak
2	5052.200	40.95	-0.66	40.29	54.00	-13.71	AVG
3	5099.500	53.93	-0.57	53.36	74.00	-20.64	peak
4	5099.500	41.03	-0.57	40.46	54.00	-13.54	AVG
5	5147.900	54.00	-0.48	53.52	74.00	-20.48	peak
6	5147.900	41.32	-0.48	40.84	54.00	-13.16	AVG
7	5150.000	52.29	-0.48	51.81	74.00	-22.19	peak
8	5195.200	113.84	-0.39	113.45	--	--	peak
9	5350.000	53.72	-0.08	53.64	74.00	-20.36	peak
10	5350.000	42.45	-0.08	42.37	54.00	-11.63	AVG
11	5360.200	53.78	-0.06	53.72	74.00	-20.28	peak
12	5360.200	42.32	-0.06	42.26	54.00	-11.74	AVG
13	5397.600	54.27	0.01	54.28	74.00	-19.72	peak
14	5397.600	41.99	0.01	42.00	54.00	-12.00	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

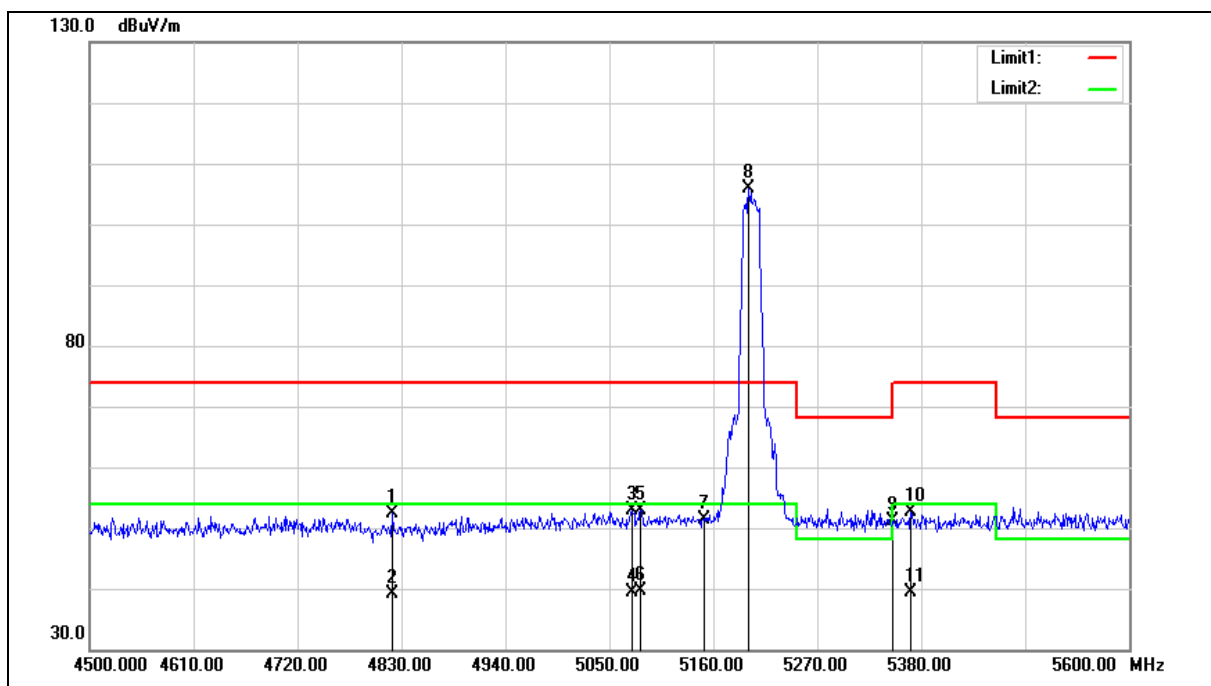

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4820.100	53.52	-1.26	52.26	74.00	-21.74	peak
2	4820.100	40.38	-1.26	39.12	54.00	-14.88	AVG
3	5074.200	53.42	-0.62	52.80	74.00	-21.20	peak
4	5074.200	39.99	-0.62	39.37	54.00	-14.63	AVG
5	5083.000	53.49	-0.60	52.89	74.00	-21.11	peak
6	5083.000	40.12	-0.60	39.52	54.00	-14.48	AVG
7	5150.000	51.79	-0.48	51.31	74.00	-22.69	peak
8	5197.400	106.34	-0.38	105.96	--	--	peak
9	5350.000	51.27	-0.08	51.19	74.00	-22.81	peak
10	5369.000	52.57	-0.04	52.53	74.00	-21.47	peak
11	5369.000	39.49	-0.04	39.45	54.00	-14.55	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

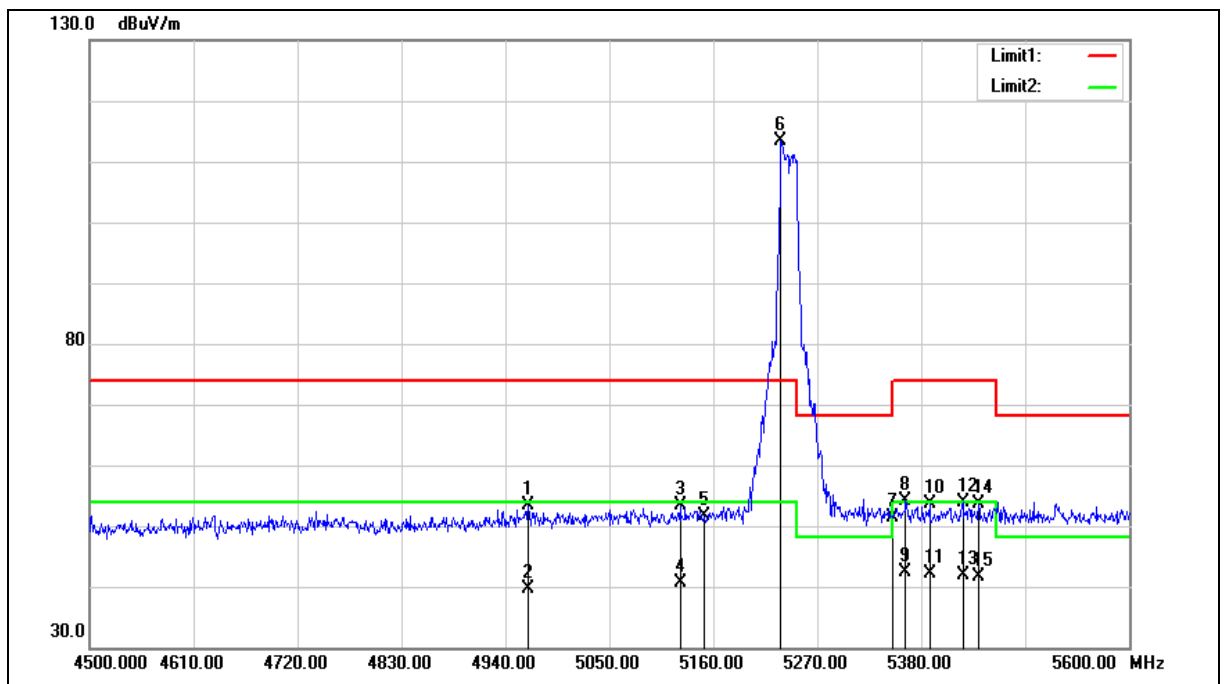

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4964.200	54.16	-0.87	53.29	74.00	-20.71	peak
2	4964.200	40.59	-0.87	39.72	54.00	-14.28	AVG
3	5124.800	53.85	-0.52	53.33	74.00	-20.67	peak
4	5124.800	41.08	-0.52	40.56	54.00	-13.44	AVG
5	5150.000	52.08	-0.48	51.60	74.00	-22.40	peak
6	5231.500	113.75	-0.31	113.44	--	--	peak
7	5350.000	51.56	-0.08	51.48	74.00	-22.52	peak
8	5363.500	54.10	-0.06	54.04	74.00	-19.96	peak
9	5363.500	42.51	-0.06	42.45	54.00	-11.55	AVG
10	5388.800	53.52	0.00	53.52	74.00	-20.48	peak
11	5388.800	42.23	0.00	42.23	54.00	-11.77	AVG
12	5424.000	53.74	0.06	53.80	74.00	-20.20	peak
13	5424.000	41.85	0.06	41.91	54.00	-12.09	AVG
14	5440.500	53.63	0.09	53.72	74.00	-20.28	peak
15	5440.500	41.66	0.09	41.75	54.00	-12.25	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

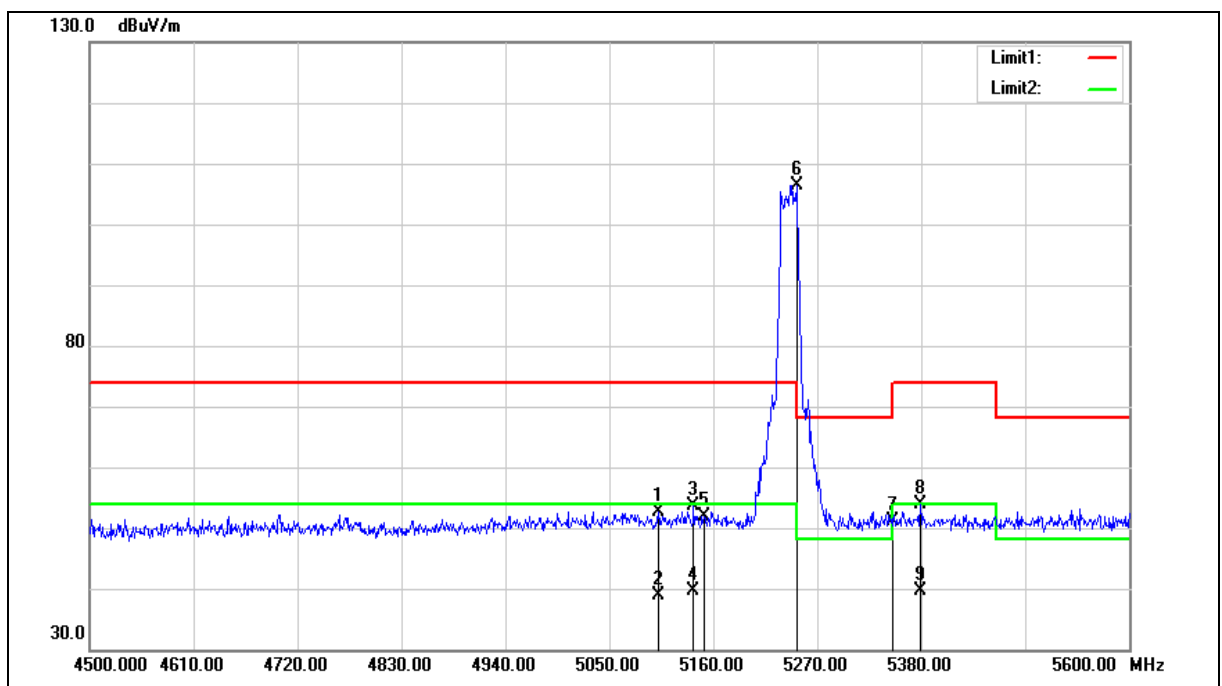

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5101.700	53.15	-0.57	52.58	74.00	-21.42	peak
2	5101.700	39.57	-0.57	39.00	54.00	-15.00	AVG
3	5139.100	54.14	-0.49	53.65	74.00	-20.35	peak
4	5139.100	40.17	-0.49	39.68	54.00	-14.32	AVG
5	5150.000	52.48	-0.48	52.00	74.00	-22.00	peak
6	5248.000	106.78	-0.28	106.50	--	--	peak
7	5350.000	51.12	-0.08	51.04	74.00	-22.96	peak
8	5378.900	53.88	-0.03	53.85	74.00	-20.15	peak
9	5378.900	39.64	-0.03	39.61	54.00	-14.39	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

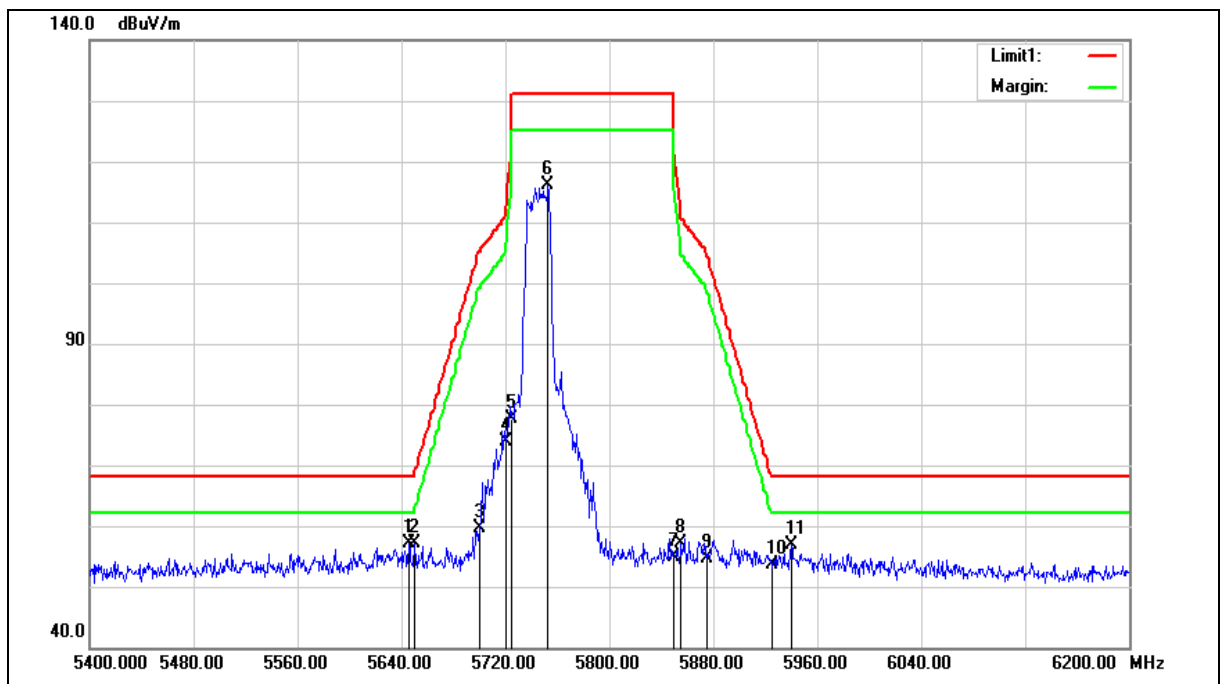

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5645.600	56.41	0.61	57.02	68.20	-11.18	peak
2	5650.000	56.44	0.62	57.06	68.20	-11.14	peak
3	5700.000	58.78	0.75	59.53	105.20	-45.67	peak
4	5720.000	73.15	0.81	73.96	110.80	-36.84	peak
5	5725.000	76.87	0.82	77.69	122.20	-44.51	peak
6	5752.800	115.23	0.90	116.13	--	--	peak
7	5850.000	53.72	1.17	54.89	122.20	-67.31	peak
8	5855.000	55.89	1.18	57.07	110.80	-53.73	peak
9	5875.000	53.40	1.23	54.63	105.20	-50.57	peak
10	5925.000	52.37	1.37	53.74	68.20	-14.46	peak
11	5940.000	55.58	1.40	56.98	68.20	-11.22	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

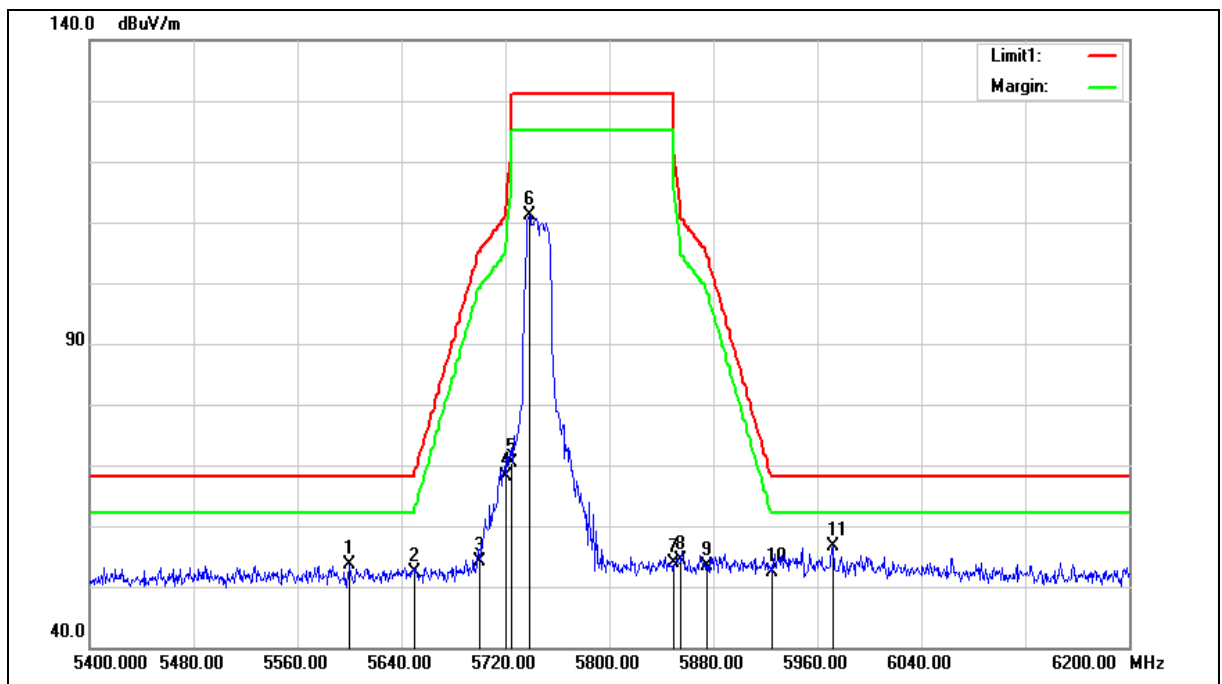

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5600.000	53.10	0.48	53.58	68.20	-14.62	peak
2	5650.000	51.64	0.62	52.26	68.20	-15.94	peak
3	5700.000	53.31	0.75	54.06	105.20	-51.14	peak
4	5720.000	67.25	0.81	68.06	110.80	-42.74	peak
5	5725.000	69.55	0.82	70.37	122.20	-51.83	peak
6	5738.400	110.19	0.86	111.05	--	--	peak
7	5850.000	52.69	1.17	53.86	122.20	-68.34	peak
8	5855.000	53.31	1.18	54.49	110.80	-56.31	peak
9	5875.000	52.06	1.23	53.29	105.20	-51.91	peak
10	5925.000	51.06	1.37	52.43	68.20	-15.77	peak
11	5972.000	55.03	1.50	56.53	68.20	-11.67	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

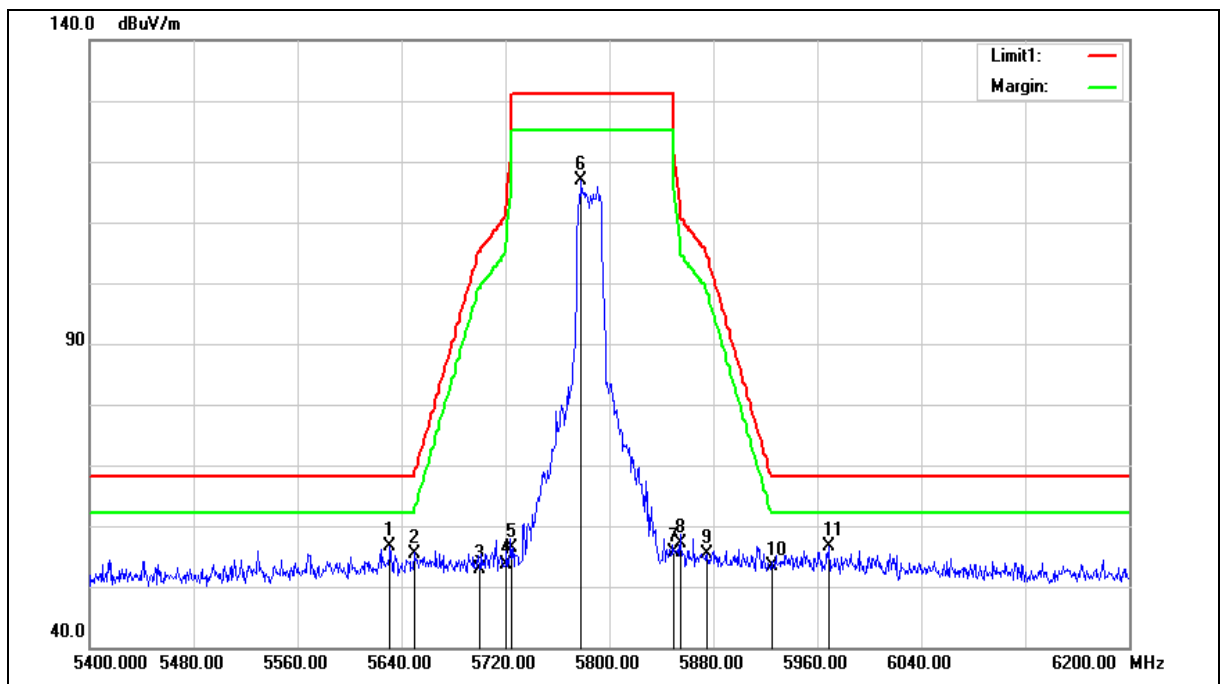

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5631.200	55.95	0.58	56.53	68.20	-11.67	peak
2	5650.000	54.84	0.62	55.46	68.20	-12.74	peak
3	5700.000	52.12	0.75	52.87	105.20	-52.33	peak
4	5720.000	52.75	0.81	53.56	110.80	-57.24	peak
5	5725.000	55.54	0.82	56.36	122.20	-65.84	peak
6	5778.400	115.80	0.98	116.78	--	--	peak
7	5850.000	54.36	1.17	55.53	122.20	-66.67	peak
8	5855.000	55.90	1.18	57.08	110.80	-53.72	peak
9	5875.000	54.06	1.23	55.29	105.20	-49.91	peak
10	5925.000	51.92	1.37	53.29	68.20	-14.91	peak
11	5968.800	55.25	1.49	56.74	68.20	-11.46	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

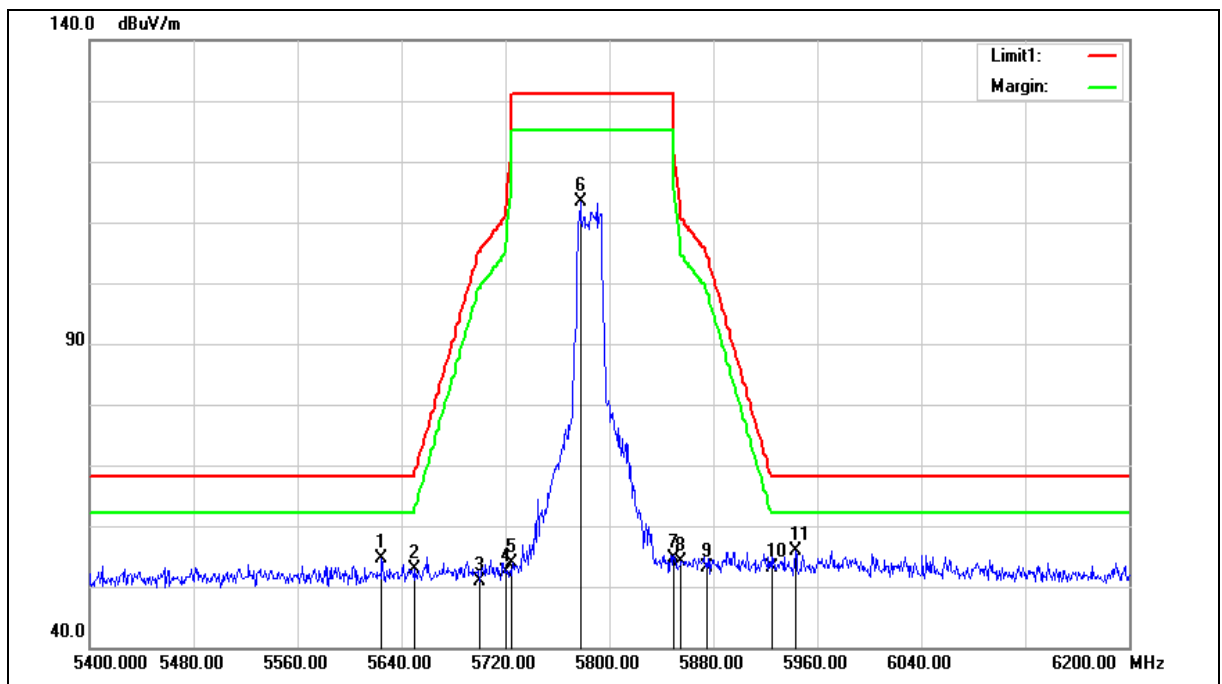

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5624.800	54.08	0.55	54.63	68.20	-13.57	peak
2	5650.000	52.24	0.62	52.86	68.20	-15.34	peak
3	5700.000	50.17	0.75	50.92	105.20	-54.28	peak
4	5720.000	51.57	0.81	52.38	110.80	-58.42	peak
5	5725.000	52.95	0.82	53.77	122.20	-68.43	peak
6	5777.600	112.34	0.97	113.31	--	--	peak
7	5850.000	53.53	1.17	54.70	122.20	-67.50	peak
8	5855.000	53.01	1.18	54.19	110.80	-56.61	peak
9	5875.000	52.00	1.23	53.23	105.20	-51.97	peak
10	5925.000	51.77	1.37	53.14	68.20	-15.06	peak
11	5943.200	54.57	1.42	55.99	68.20	-12.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		

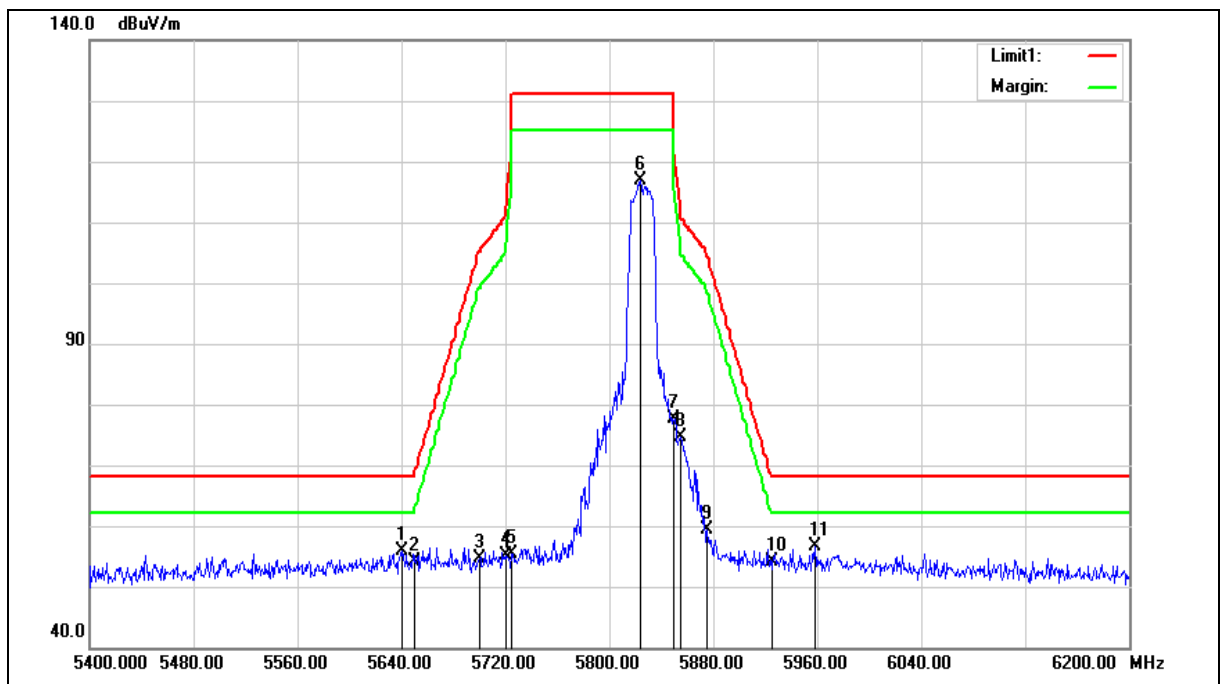

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 13		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5640.800	55.39	0.60	55.99	68.20	-12.21	peak
2	5650.000	53.49	0.62	54.11	68.20	-14.09	peak
3	5700.000	53.90	0.75	54.65	105.20	-50.55	peak
4	5720.000	54.40	0.81	55.21	110.80	-55.59	peak
5	5725.000	54.54	0.82	55.36	122.20	-66.84	peak
6	5824.000	115.81	1.10	116.91	--	--	peak
7	5850.000	76.47	1.17	77.64	122.20	-44.56	peak
8	5855.000	73.49	1.18	74.67	110.80	-36.13	peak
9	5875.000	58.22	1.23	59.45	105.20	-45.75	peak
10	5925.000	52.82	1.37	54.19	68.20	-14.01	peak
11	5958.400	55.10	1.45	56.55	68.20	-11.65	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		

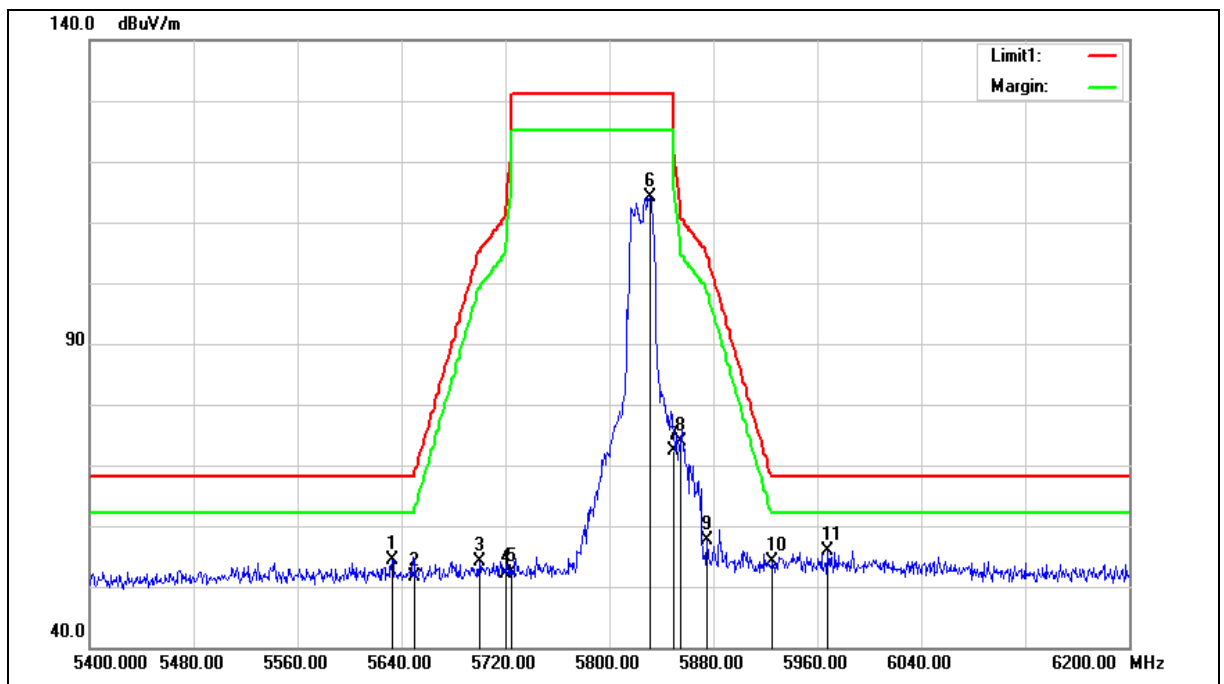

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 13		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5632.800	53.73	0.58	54.31	68.20	-13.89	peak
2	5650.000	51.08	0.62	51.70	68.20	-16.50	peak
3	5700.000	53.42	0.75	54.17	105.20	-51.03	peak
4	5720.000	51.30	0.81	52.11	110.80	-58.69	peak
5	5725.000	51.54	0.82	52.36	122.20	-69.84	peak
6	5831.200	112.99	1.11	114.10	--	--	peak
7	5850.000	71.18	1.17	72.35	122.20	-49.85	peak
8	5855.000	72.71	1.18	73.89	110.80	-36.91	peak
9	5875.000	56.42	1.23	57.65	105.20	-47.55	peak
10	5925.000	52.74	1.37	54.11	68.20	-14.09	peak
11	5968.000	54.47	1.49	55.96	68.20	-12.24	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

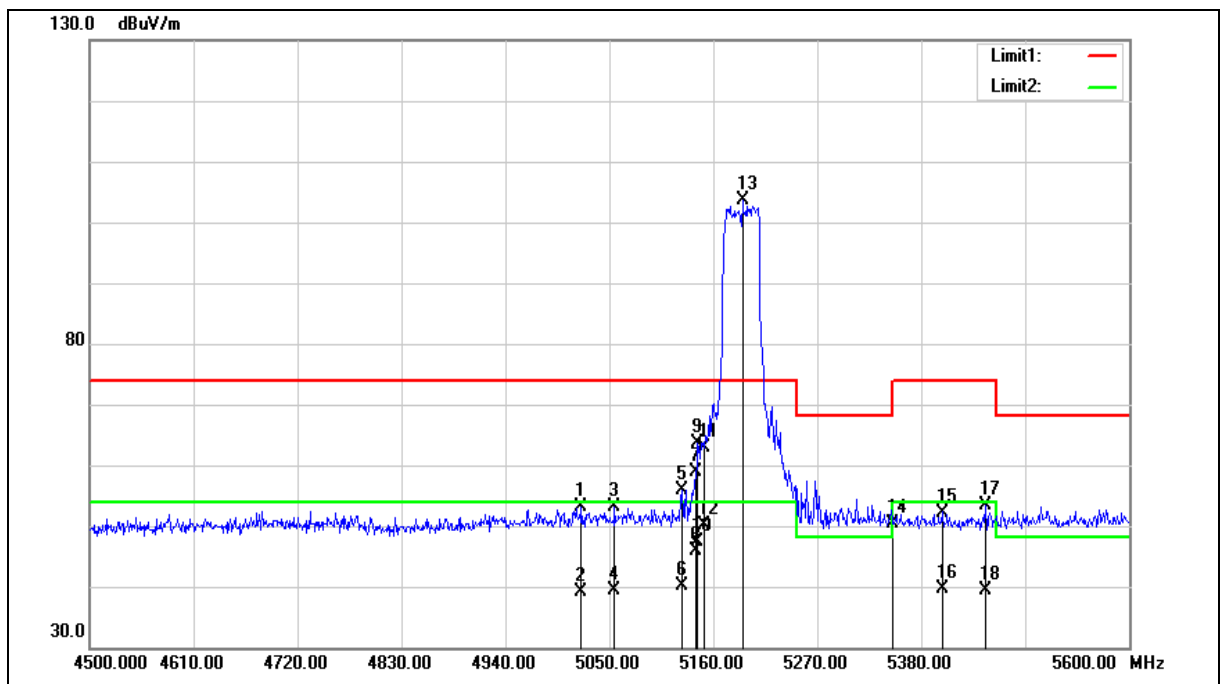

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5020.300	53.86	-0.73	53.13	74.00	-20.87	peak
2	5020.300	39.85	-0.73	39.12	54.00	-14.88	AVG
3	5055.500	53.81	-0.66	53.15	74.00	-20.85	peak
4	5055.500	40.11	-0.66	39.45	54.00	-14.55	AVG
5	5127.000	56.40	-0.52	55.88	74.00	-18.12	peak
6	5127.000	40.70	-0.52	40.18	54.00	-13.82	AVG
7	5141.300	59.26	-0.49	58.77	74.00	-15.23	peak
8	5141.300	46.36	-0.49	45.87	54.00	-8.13	AVG
9	5143.500	64.15	-0.49	63.66	74.00	-10.34	peak
10	5143.500	47.93	-0.49	47.44	54.00	-6.56	AVG
11	5150.000	63.25	-0.48	62.77	74.00	-11.23	peak
12	5150.000	50.71	-0.48	50.23	54.00	-3.77	AVG
13	5190.800	104.04	-0.40	103.64	--	--	peak
14	5350.000	50.37	-0.08	50.29	74.00	-23.71	peak
15	5402.000	52.23	0.02	52.25	74.00	-21.75	peak
16	5402.000	39.53	0.02	39.55	54.00	-14.45	AVG
17	5448.200	53.31	0.12	53.43	74.00	-20.57	peak
18	5448.200	39.36	0.12	39.48	54.00	-14.52	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

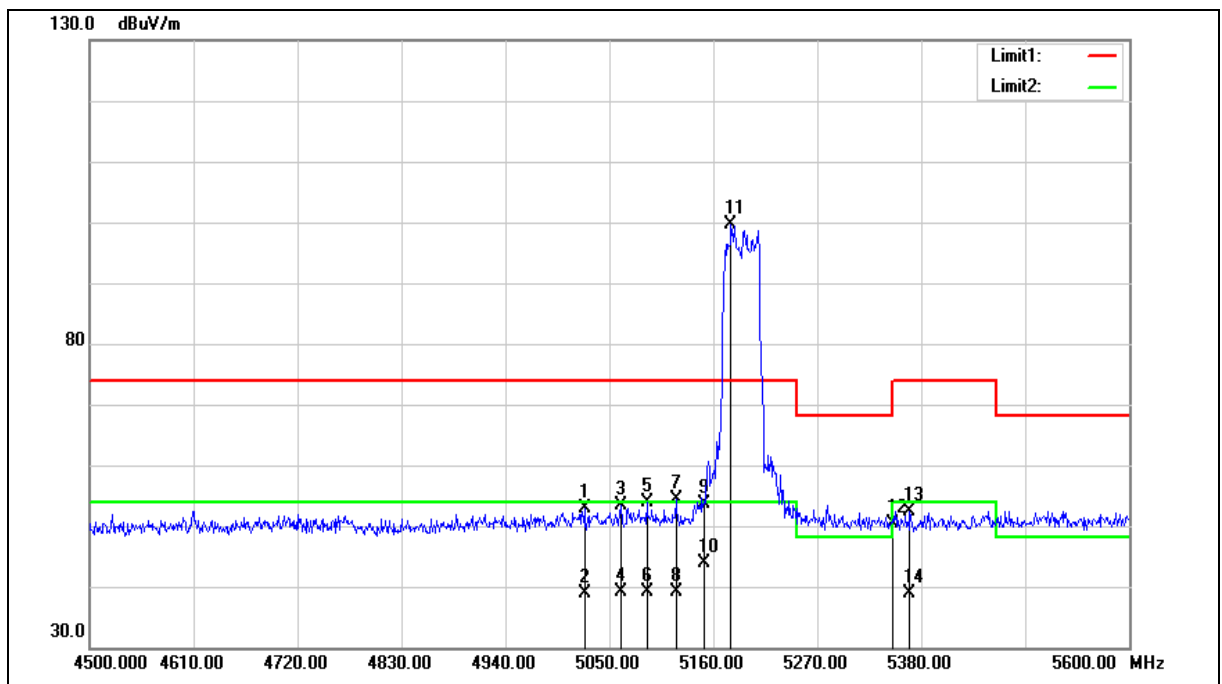

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5023.600	53.61	-0.72	52.89	74.00	-21.11	peak
2	5023.600	39.72	-0.72	39.00	54.00	-15.00	AVG
3	5062.100	54.02	-0.65	53.37	74.00	-20.63	peak
4	5062.100	39.75	-0.65	39.10	54.00	-14.90	AVG
5	5089.600	54.45	-0.60	53.85	74.00	-20.15	peak
6	5089.600	39.73	-0.60	39.13	54.00	-14.87	AVG
7	5120.400	55.03	-0.53	54.50	74.00	-19.50	peak
8	5120.400	39.75	-0.53	39.22	54.00	-14.78	AVG
9	5150.000	54.17	-0.48	53.69	74.00	-20.31	peak
10	5150.000	44.26	-0.48	43.78	54.00	-10.22	AVG
11	5178.700	100.01	-0.42	99.59	--	--	peak
12	5350.000	50.58	-0.08	50.50	74.00	-23.50	peak
13	5367.900	52.52	-0.05	52.47	74.00	-21.53	peak
14	5367.900	39.04	-0.05	38.99	54.00	-15.01	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

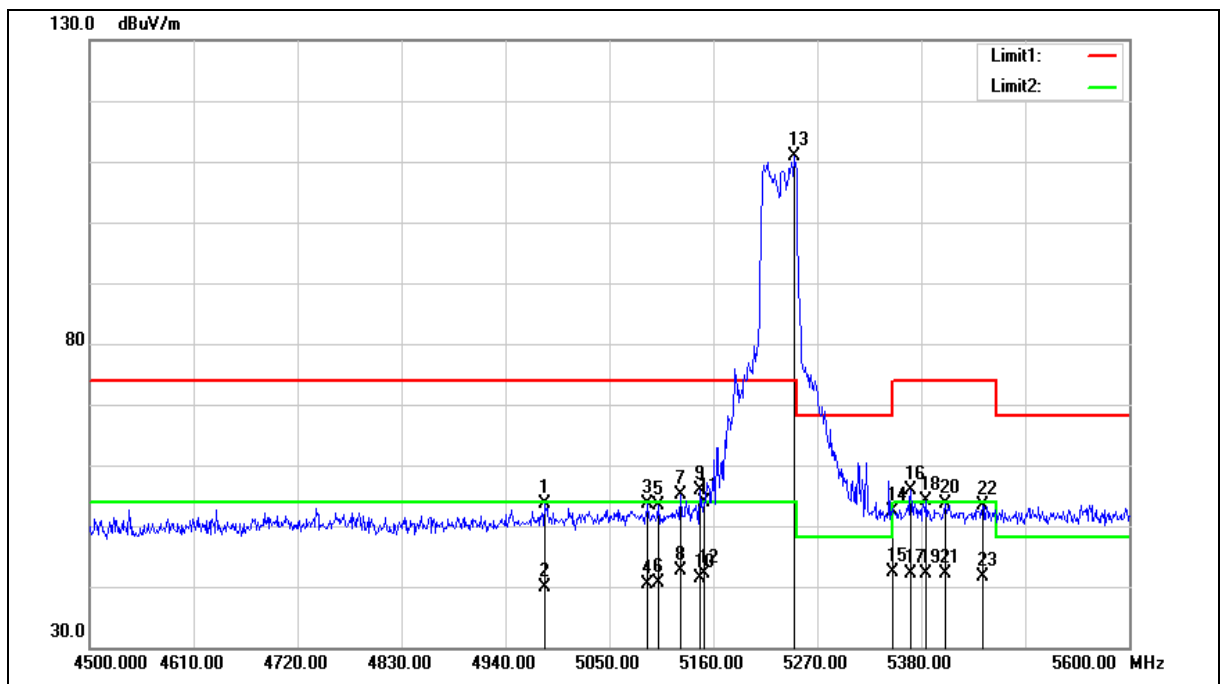

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4981.800	54.50	-0.82	53.68	74.00	-20.32	peak
2	4981.800	40.68	-0.82	39.86	54.00	-14.14	AVG
3	5090.700	54.33	-0.60	53.73	74.00	-20.27	peak
4	5090.700	41.10	-0.60	40.50	54.00	-13.50	AVG
5	5101.700	53.98	-0.57	53.41	74.00	-20.59	peak
6	5101.700	41.20	-0.57	40.63	54.00	-13.37	AVG
7	5124.800	55.68	-0.52	55.16	74.00	-18.84	peak
8	5124.800	43.04	-0.52	42.52	54.00	-11.48	AVG
9	5145.700	56.39	-0.48	55.91	74.00	-18.09	peak
10	5145.700	41.76	-0.48	41.28	54.00	-12.72	AVG
11	5150.000	54.25	-0.48	53.77	74.00	-20.23	peak
12	5150.000	42.65	-0.48	42.17	54.00	-11.83	AVG
13	5245.800	111.10	-0.28	110.82	--	--	peak
14	5350.000	52.48	-0.08	52.40	74.00	-21.60	peak
15	5350.000	42.50	-0.08	42.42	54.00	-11.58	AVG
16	5369.000	55.80	-0.04	55.76	74.00	-18.24	peak
17	5369.000	42.28	-0.04	42.24	54.00	-11.76	AVG
18	5385.500	54.03	0.00	54.03	74.00	-19.97	peak
19	5385.500	42.11	0.00	42.11	54.00	-11.89	AVG
20	5405.300	53.56	0.02	53.58	74.00	-20.42	peak
21	5405.300	42.03	0.02	42.05	54.00	-11.95	AVG
22	5444.900	53.34	0.11	53.45	74.00	-20.55	peak
23	5444.900	41.48	0.11	41.59	54.00	-12.41	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

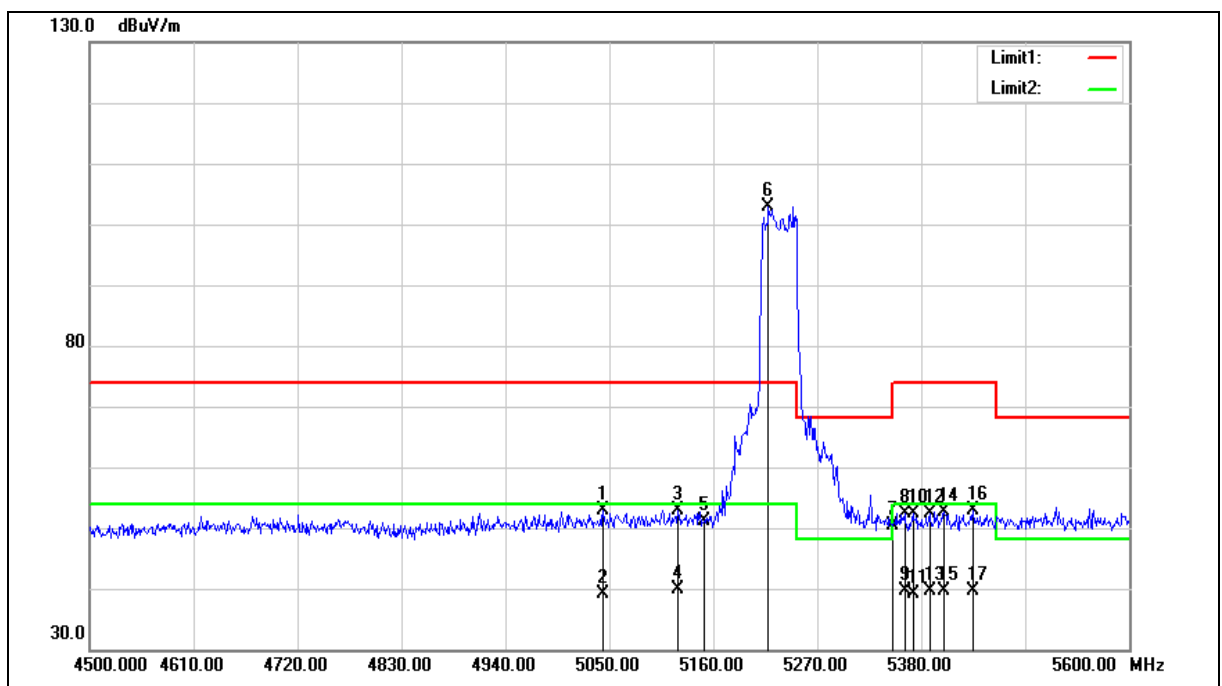

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5043.400	53.47	-0.69	52.78	74.00	-21.22	peak
2	5043.400	39.79	-0.69	39.10	54.00	-14.90	AVG
3	5122.600	53.51	-0.53	52.98	74.00	-21.02	peak
4	5122.600	40.40	-0.53	39.87	54.00	-14.13	AVG
5	5150.000	51.60	-0.48	51.12	74.00	-22.88	peak
6	5218.300	103.30	-0.35	102.95	--	--	peak
7	5350.000	50.39	-0.08	50.31	74.00	-23.69	peak
8	5362.400	52.53	-0.06	52.47	74.00	-21.53	peak
9	5362.400	39.69	-0.06	39.63	54.00	-14.37	AVG
10	5371.200	52.48	-0.03	52.45	74.00	-21.55	peak
11	5371.200	39.22	-0.03	39.19	54.00	-14.81	AVG
12	5388.800	52.48	0.00	52.48	74.00	-21.52	peak
13	5388.800	39.74	0.00	39.74	54.00	-14.26	AVG
14	5404.200	52.59	0.02	52.61	74.00	-21.39	peak
15	5404.200	39.61	0.02	39.63	54.00	-14.37	AVG
16	5435.000	52.69	0.09	52.78	74.00	-21.22	peak
17	5435.000	39.46	0.09	39.55	54.00	-14.45	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

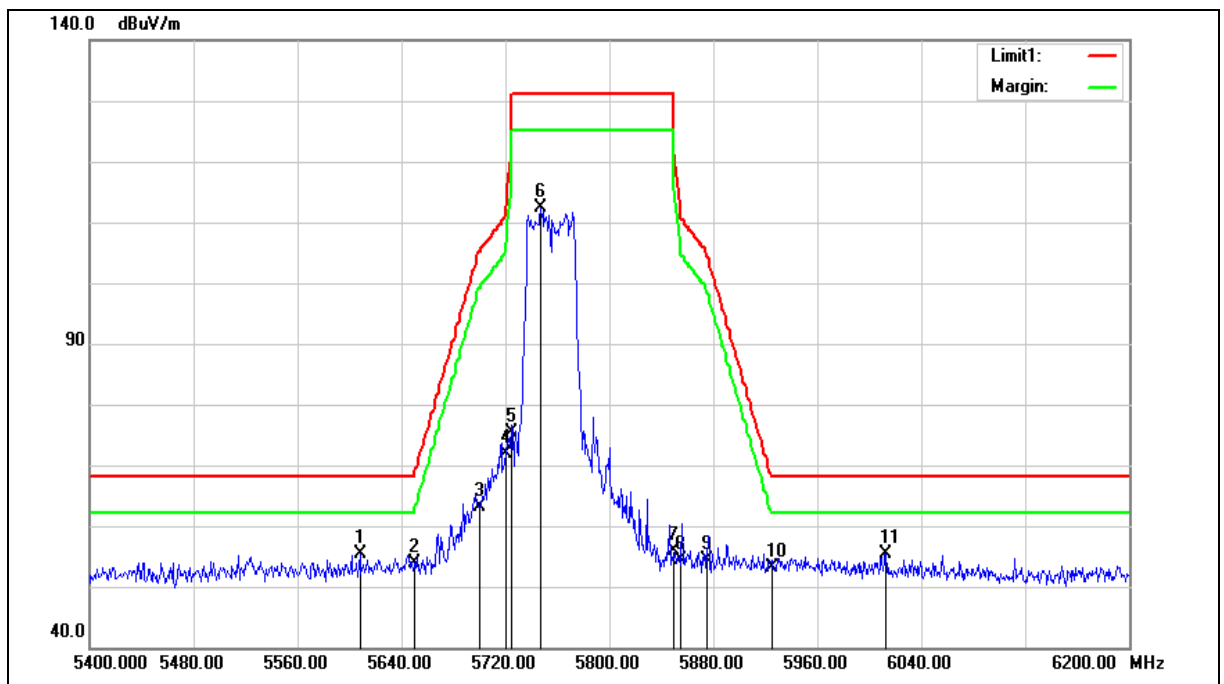

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5608.000	54.90	0.51	55.41	68.20	-12.79	peak
2	5650.000	53.26	0.62	53.88	68.20	-14.32	peak
3	5700.000	62.43	0.75	63.18	105.20	-42.02	peak
4	5720.000	71.13	0.81	71.94	110.80	-38.86	peak
5	5725.000	74.66	0.82	75.48	122.20	-46.72	peak
6	5747.200	111.37	0.89	112.26	--	--	peak
7	5850.000	54.76	1.17	55.93	122.20	-66.27	peak
8	5855.000	53.18	1.18	54.36	110.80	-56.44	peak
9	5875.000	53.12	1.23	54.35	105.20	-50.85	peak
10	5925.000	51.65	1.37	53.02	68.20	-15.18	peak
11	6012.800	53.83	1.62	55.45	68.20	-12.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

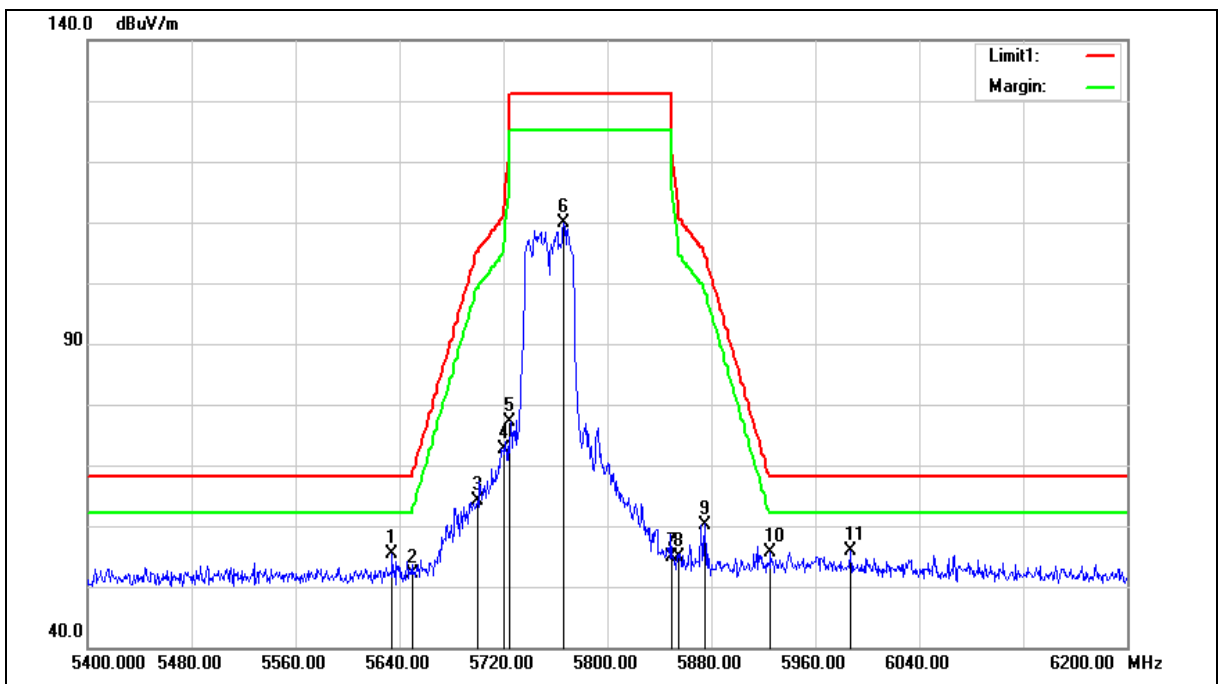

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5634.400	54.80	0.59	55.39	68.20	-12.81	peak
2	5650.000	51.63	0.62	52.25	68.20	-15.95	peak
3	5700.000	63.30	0.75	64.05	105.20	-41.15	peak
4	5720.000	71.78	0.81	72.59	110.80	-38.21	peak
5	5725.000	76.39	0.82	77.21	122.20	-44.99	peak
6	5766.400	108.93	0.94	109.87	--	--	peak
7	5850.000	53.73	1.17	54.90	122.20	-67.30	peak
8	5855.000	53.63	1.18	54.81	110.80	-55.99	peak
9	5875.000	59.02	1.23	60.25	105.20	-44.95	peak
10	5925.000	54.19	1.37	55.56	68.20	-12.64	peak
11	5987.200	54.27	1.53	55.80	68.20	-12.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		

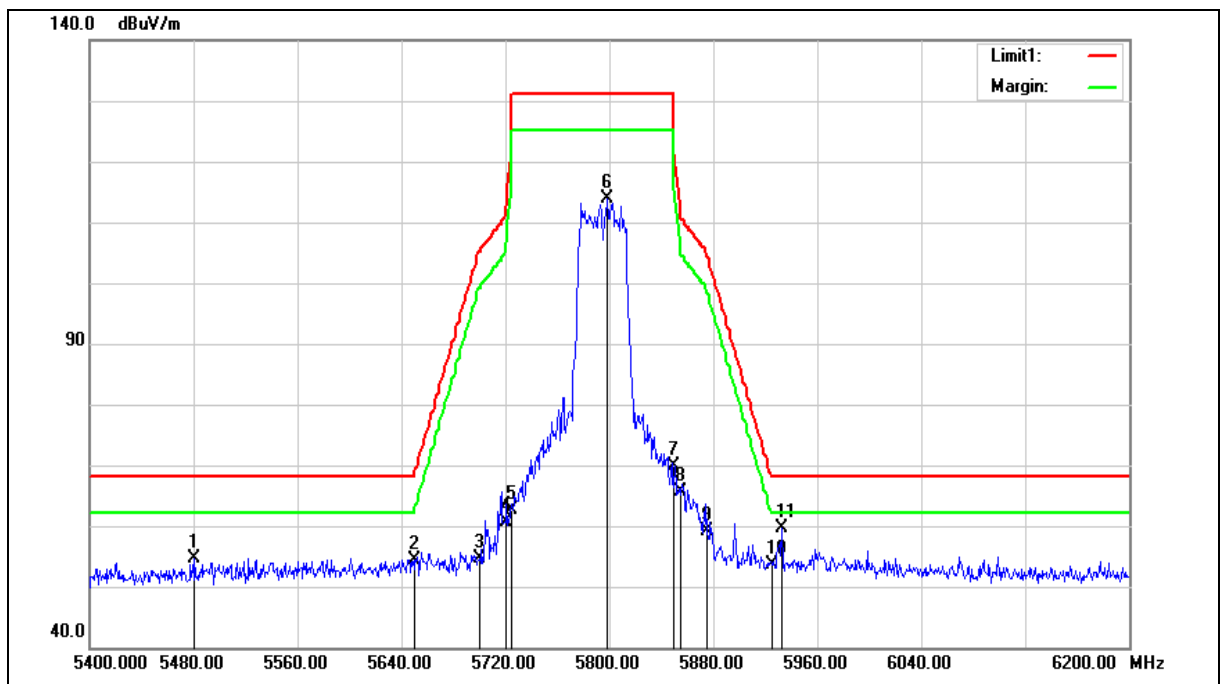

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795MHz		
Mode:	Mode 14		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5480.800	54.55	0.17	54.72	68.20	-13.48	peak
2	5650.000	53.79	0.62	54.41	68.20	-13.79	peak
3	5700.000	53.93	0.75	54.68	105.20	-50.52	peak
4	5720.000	59.81	0.81	60.62	110.80	-50.18	peak
5	5725.000	61.89	0.82	62.71	122.20	-59.49	peak
6	5798.400	112.75	1.03	113.78	--	--	peak
7	5850.000	68.74	1.17	69.91	122.20	-52.29	peak
8	5855.000	64.54	1.18	65.72	110.80	-45.08	peak
9	5875.000	57.88	1.23	59.11	105.20	-46.09	peak
10	5925.000	52.18	1.37	53.55	68.20	-14.65	peak
11	5932.800	58.19	1.38	59.57	68.20	-8.63	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		

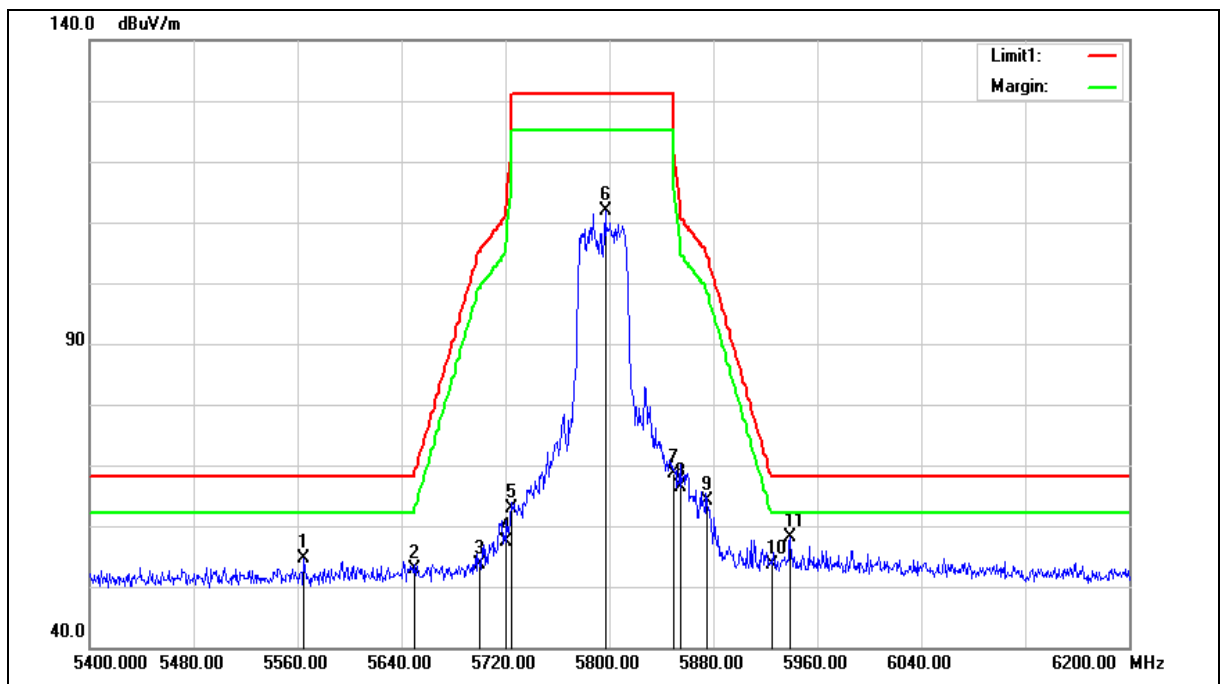

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795MHz		
Mode:	Mode 14		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5564.800	54.28	0.39	54.67	68.20	-13.53	peak
2	5650.000	52.26	0.62	52.88	68.20	-15.32	peak
3	5700.000	52.77	0.75	53.52	105.20	-51.68	peak
4	5720.000	56.60	0.81	57.41	110.80	-53.39	peak
5	5725.000	62.16	0.82	62.98	122.20	-59.22	peak
6	5796.800	110.80	1.01	111.81	--	--	peak
7	5850.000	67.55	1.17	68.72	122.20	-53.48	peak
8	5855.000	65.18	1.18	66.36	110.80	-44.44	peak
9	5875.000	62.95	1.23	64.18	105.20	-41.02	peak
10	5925.000	52.37	1.37	53.74	68.20	-14.46	peak
11	5939.200	56.80	1.40	58.20	68.20	-10.00	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

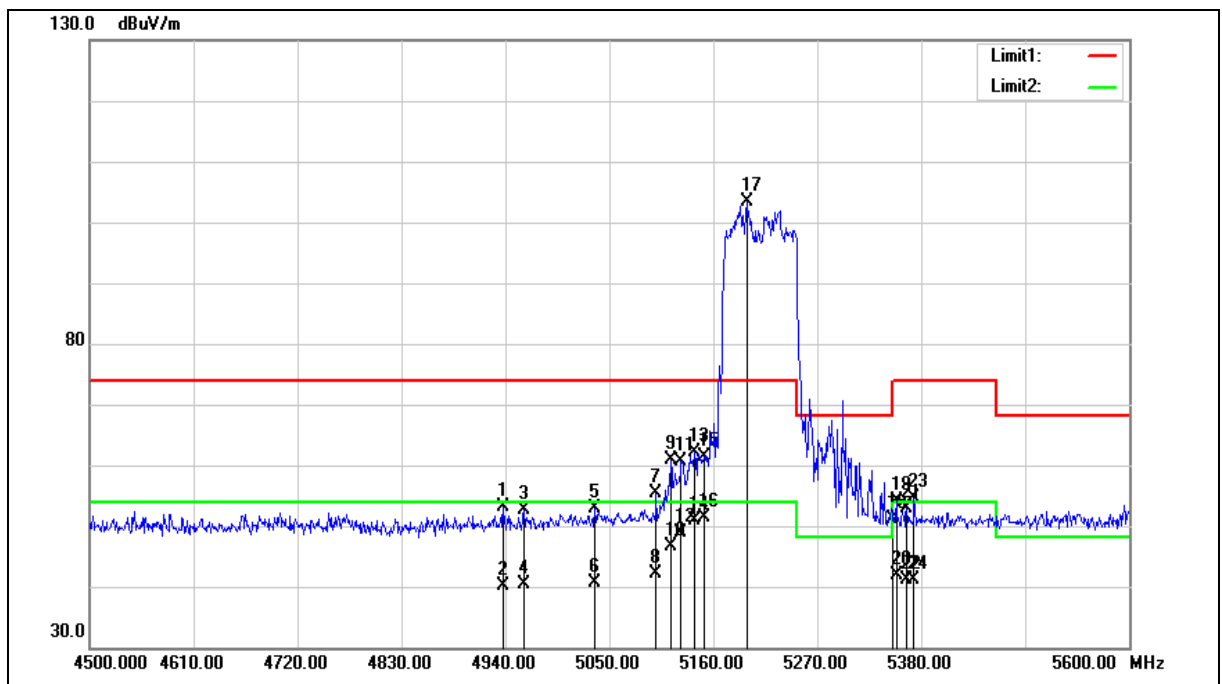

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4937.800	54.09	-0.94	53.15	74.00	-20.85	peak
2	4937.800	41.01	-0.94	40.07	54.00	-13.93	AVG
3	4959.800	53.61	-0.88	52.73	74.00	-21.27	peak
4	4959.800	41.23	-0.88	40.35	54.00	-13.65	AVG
5	5034.600	53.59	-0.70	52.89	74.00	-21.11	peak
6	5034.600	41.40	-0.70	40.70	54.00	-13.30	AVG
7	5099.500	55.97	-0.57	55.40	74.00	-18.60	peak
8	5099.500	42.59	-0.57	42.02	54.00	-11.98	AVG
9	5114.900	61.42	-0.54	60.88	74.00	-13.12	peak
10	5114.900	47.16	-0.54	46.62	54.00	-7.38	AVG
11	5125.900	61.25	-0.52	60.73	74.00	-13.27	peak
12	5125.900	49.46	-0.52	48.94	54.00	-5.06	AVG
13	5140.200	62.69	-0.49	62.20	74.00	-11.80	peak
14	5140.200	51.32	-0.49	50.83	54.00	-3.17	AVG
15	5150.000	61.74	-0.48	61.26	74.00	-12.74	peak
16	5150.000	51.83	-0.48	51.35	54.00	-2.65	AVG
17	5195.200	103.79	-0.39	103.40	--	--	peak
18	5350.000	51.18	-0.08	51.10	74.00	-22.90	peak
19	5353.600	54.16	-0.08	54.08	74.00	-19.92	peak
20	5353.600	41.98	-0.08	41.90	54.00	-12.10	AVG
21	5364.600	52.95	-0.05	52.90	74.00	-21.10	peak
22	5364.600	41.30	-0.05	41.25	54.00	-12.75	AVG
23	5372.300	54.74	-0.03	54.71	74.00	-19.29	peak
24	5372.300	41.09	-0.03	41.06	54.00	-12.94	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

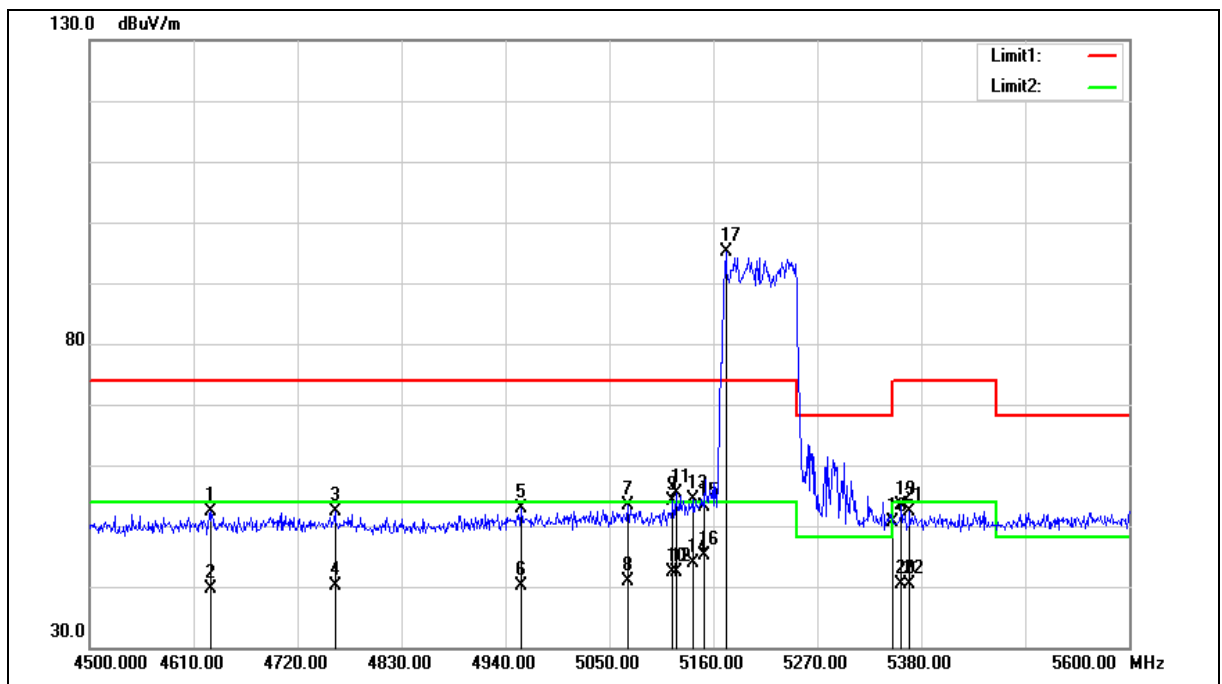

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4627.600	54.10	-1.80	52.30	74.00	-21.70	peak
2	4627.600	41.38	-1.80	39.58	54.00	-14.42	AVG
3	4759.600	53.87	-1.43	52.44	74.00	-21.56	peak
4	4759.600	41.62	-1.43	40.19	54.00	-13.81	AVG
5	4956.500	53.88	-0.89	52.99	74.00	-21.01	peak
6	4956.500	41.14	-0.89	40.25	54.00	-13.75	AVG
7	5069.800	53.96	-0.63	53.33	74.00	-20.67	peak
8	5069.800	41.47	-0.63	40.84	54.00	-13.16	AVG
9	5117.100	54.59	-0.54	54.05	74.00	-19.95	peak
10	5117.100	42.99	-0.54	42.45	54.00	-11.55	AVG
11	5120.400	55.86	-0.53	55.33	74.00	-18.67	peak
12	5120.400	42.98	-0.53	42.45	54.00	-11.55	AVG
13	5138.000	54.75	-0.49	54.26	74.00	-19.74	peak
14	5138.000	44.27	-0.49	43.78	54.00	-10.22	AVG
15	5150.000	53.61	-0.48	53.13	74.00	-20.87	peak
16	5150.000	45.62	-0.48	45.14	54.00	-8.86	AVG
17	5173.200	95.65	-0.43	95.22	--	--	peak
18	5350.000	50.61	-0.08	50.53	74.00	-23.47	peak
19	5359.100	53.53	-0.06	53.47	74.00	-20.53	peak
20	5359.100	40.48	-0.06	40.42	54.00	-13.58	AVG
21	5367.900	52.42	-0.05	52.37	74.00	-21.63	peak
22	5367.900	40.40	-0.05	40.35	54.00	-13.65	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

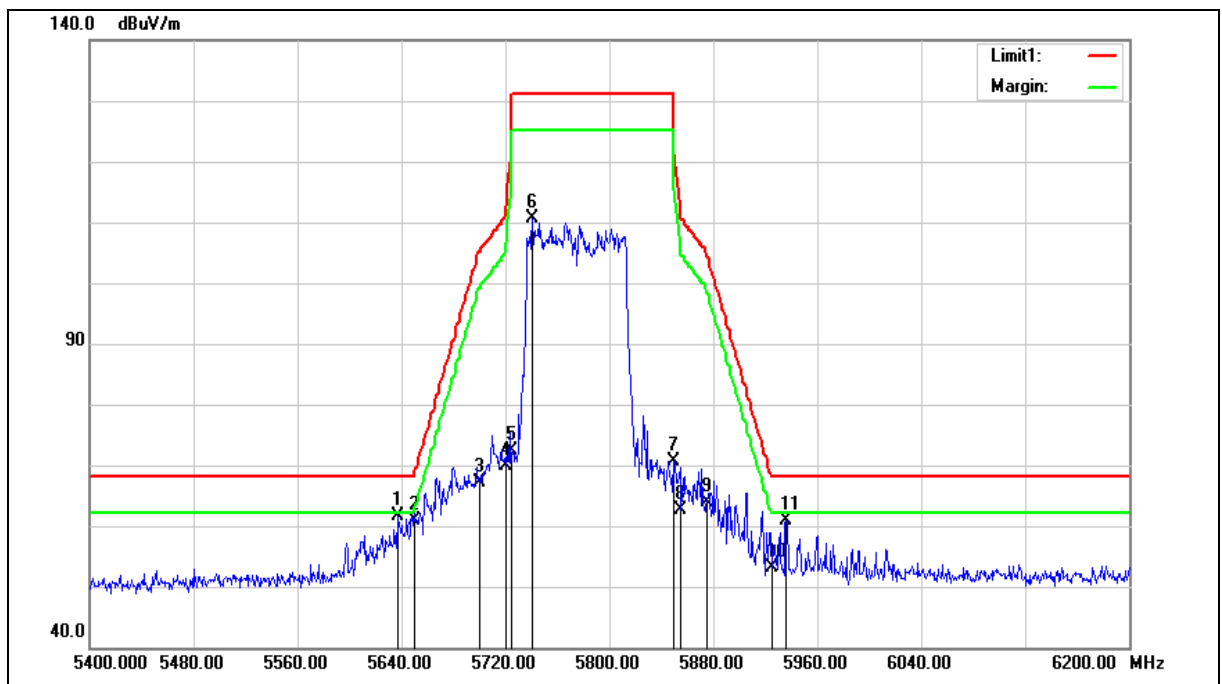

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5636.800	61.01	0.59	61.60	68.20	-6.60	peak
2	5650.000	60.37	0.62	60.99	68.20	-7.21	peak
3	5700.000	66.33	0.75	67.08	105.20	-38.12	peak
4	5720.000	69.08	0.81	69.89	110.80	-40.91	peak
5	5725.000	71.55	0.82	72.37	122.20	-49.83	peak
6	5740.800	109.68	0.87	110.55	--	--	peak
7	5850.000	69.50	1.17	70.67	122.20	-51.53	peak
8	5855.000	61.48	1.18	62.66	110.80	-48.14	peak
9	5875.000	62.60	1.23	63.83	105.20	-41.37	peak
10	5925.000	51.78	1.37	53.15	68.20	-15.05	peak
11	5936.000	59.45	1.40	60.85	68.20	-7.35	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

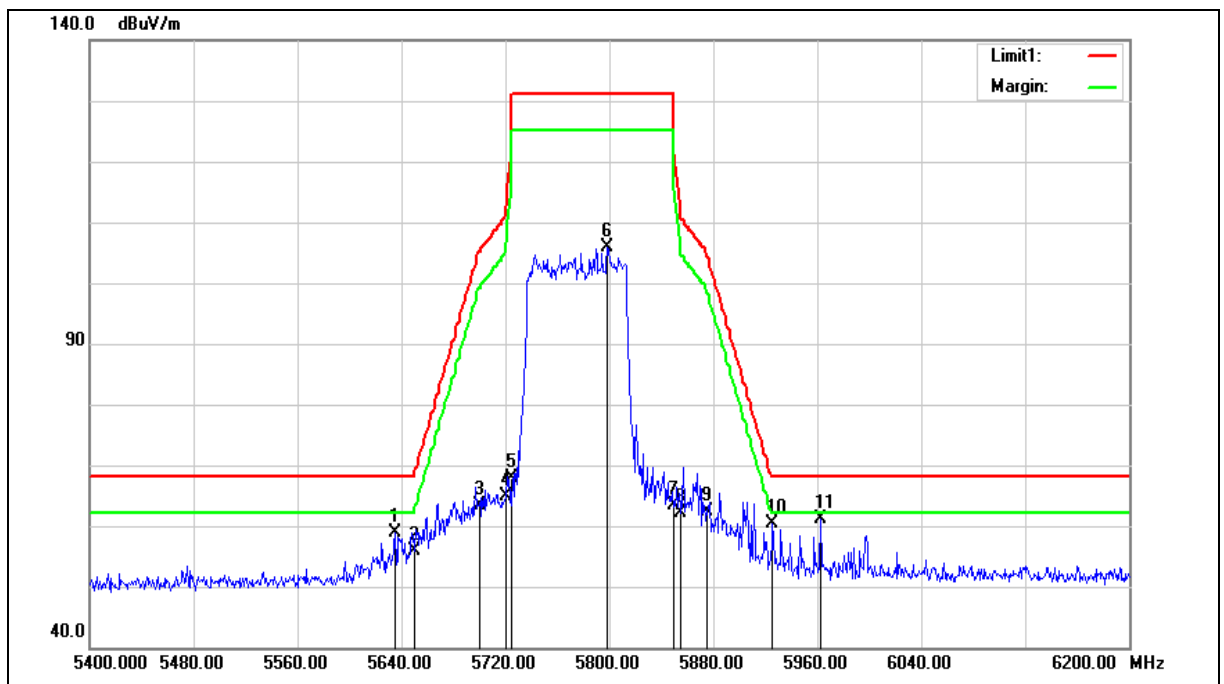

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5635.200	58.34	0.59	58.93	68.20	-9.27	peak
2	5650.000	55.24	0.62	55.86	68.20	-12.34	peak
3	5700.000	62.63	0.75	63.38	105.20	-41.82	peak
4	5720.000	64.06	0.81	64.87	110.80	-45.93	peak
5	5725.000	67.03	0.82	67.85	122.20	-54.35	peak
6	5798.400	104.90	1.03	105.93	--	--	peak
7	5850.000	62.16	1.17	63.33	122.20	-58.87	peak
8	5855.000	60.98	1.18	62.16	110.80	-48.64	peak
9	5875.000	61.11	1.23	62.34	105.20	-42.86	peak
10	5925.000	59.11	1.37	60.48	68.20	-7.72	peak
11	5962.400	59.59	1.46	61.05	68.20	-7.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

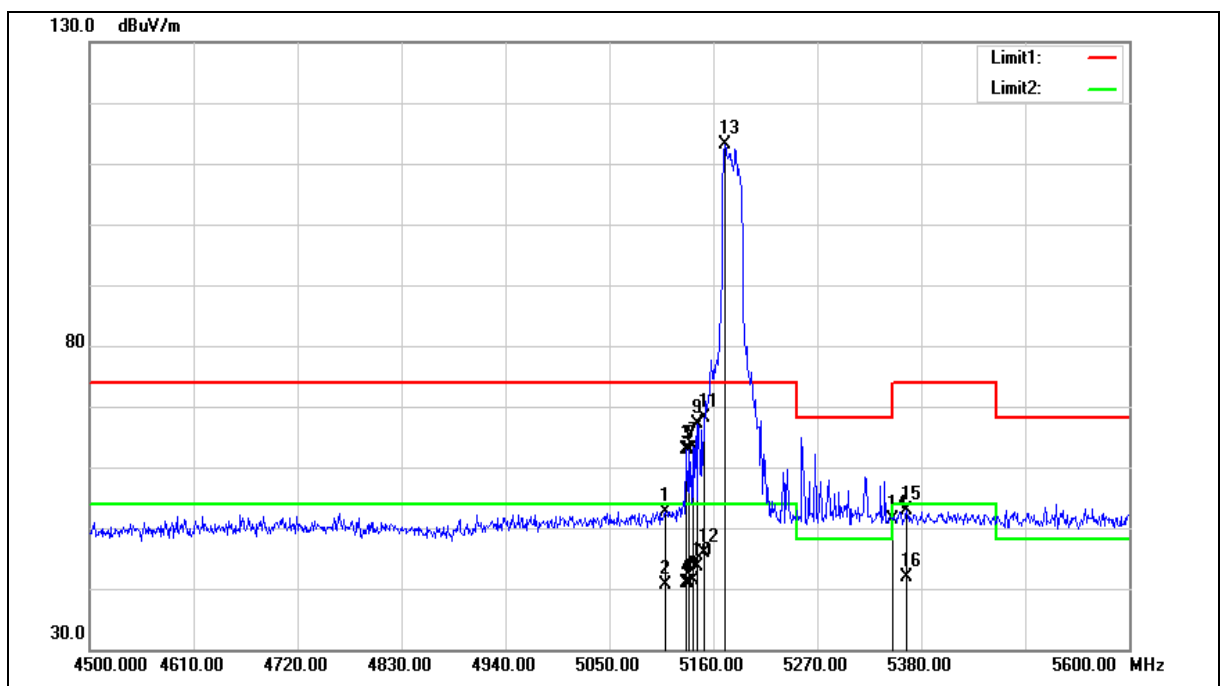

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5109.400	53.23	-0.55	52.68	74.00	-21.32	peak
2	5109.400	41.10	-0.55	40.55	54.00	-13.45	AVG
3	5131.400	63.28	-0.51	62.77	74.00	-11.23	peak
4	5131.400	41.32	-0.51	40.81	54.00	-13.19	AVG
5	5134.700	63.40	-0.51	62.89	74.00	-11.11	peak
6	5134.700	41.44	-0.51	40.93	54.00	-13.07	AVG
7	5138.000	63.87	-0.49	63.38	74.00	-10.62	peak
8	5138.000	41.95	-0.49	41.46	54.00	-12.54	AVG
9	5143.500	67.65	-0.49	67.16	74.00	-6.84	peak
10	5143.500	44.05	-0.49	43.56	54.00	-10.44	AVG
11	5150.000	68.69	-0.48	68.21	74.00	-5.79	peak
12	5150.000	46.34	-0.48	45.86	54.00	-8.14	AVG
13	5172.100	113.47	-0.43	113.04	--	--	peak
14	5350.000	51.53	-0.08	51.45	74.00	-22.55	peak
15	5364.600	52.89	-0.05	52.84	74.00	-21.16	peak
16	5364.600	41.93	-0.05	41.88	54.00	-12.12	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

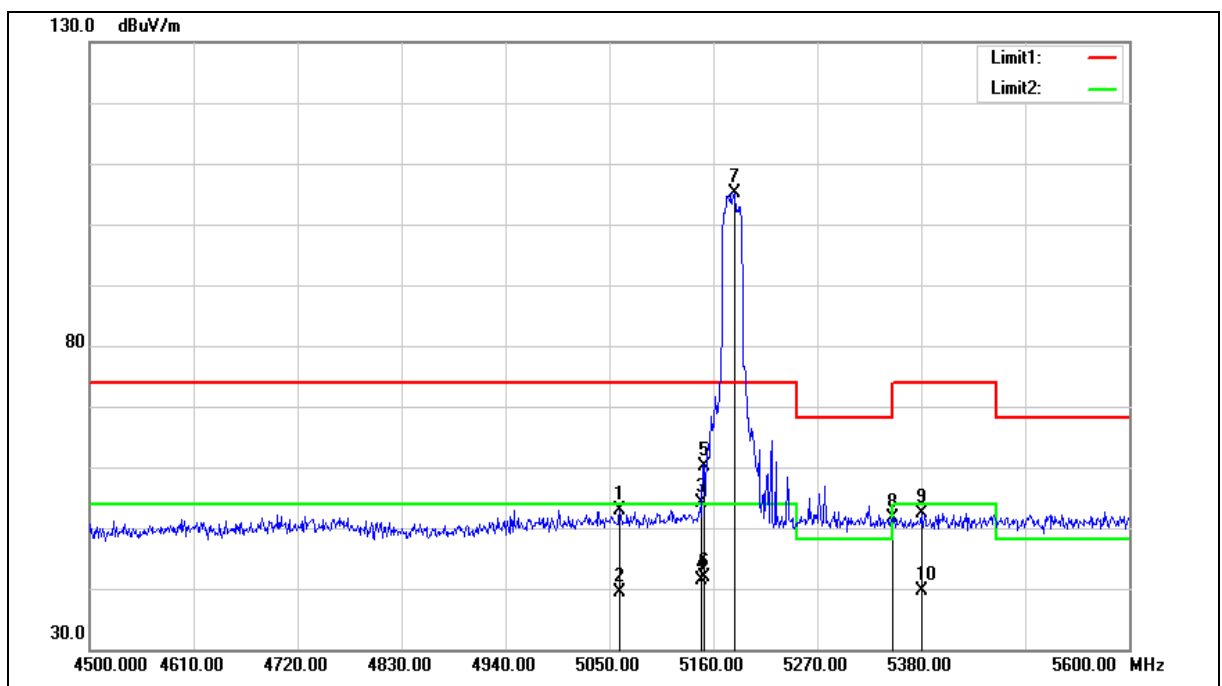

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5061.000	53.55	-0.65	52.90	74.00	-21.10	peak
2	5061.000	40.05	-0.65	39.40	54.00	-14.60	AVG
3	5147.900	54.58	-0.48	54.10	74.00	-19.90	peak
4	5147.900	41.87	-0.48	41.39	54.00	-12.61	AVG
5	5150.000	60.59	-0.48	60.11	74.00	-13.89	peak
6	5150.000	42.29	-0.48	41.81	54.00	-12.19	AVG
7	5183.100	105.43	-0.40	105.03	--	--	peak
8	5350.000	51.77	-0.08	51.69	74.00	-22.31	peak
9	5380.000	52.39	-0.03	52.36	74.00	-21.64	peak
10	5380.000	39.60	-0.03	39.57	54.00	-14.43	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

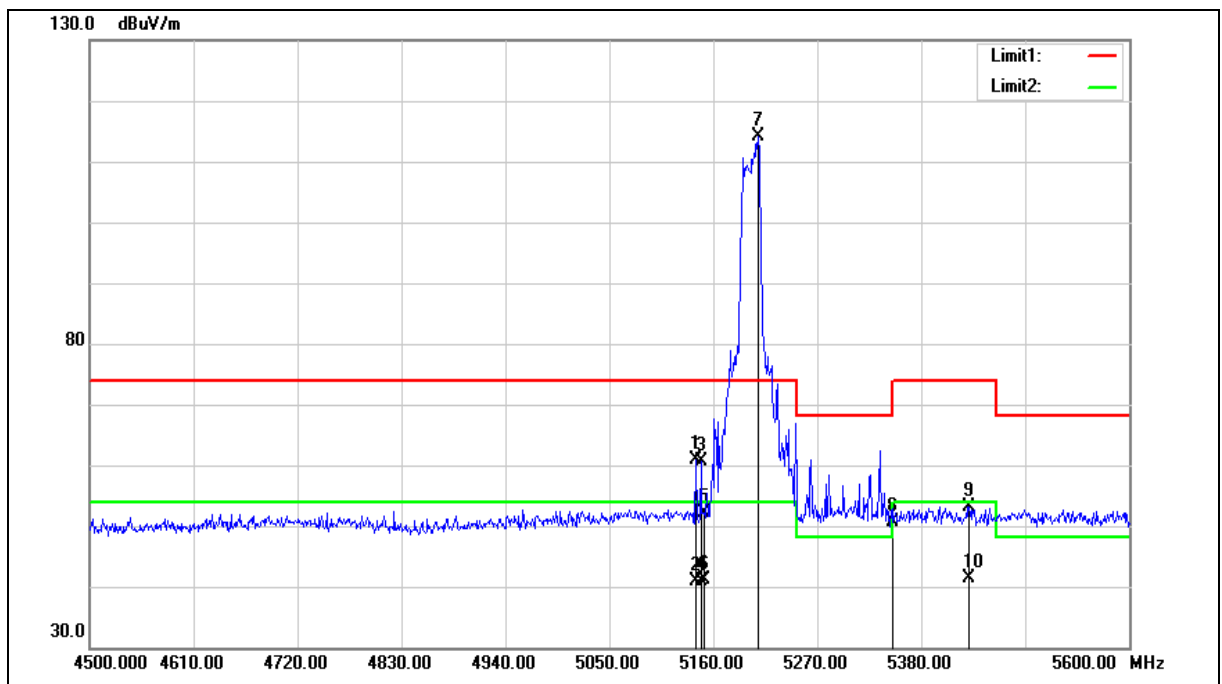

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5141.300	61.46	-0.49	60.97	74.00	-13.03	peak
2	5141.300	41.27	-0.49	40.78	54.00	-13.22	AVG
3	5146.800	61.12	-0.48	60.64	74.00	-13.36	peak
4	5146.800	41.34	-0.48	40.86	54.00	-13.14	AVG
5	5150.000	52.57	-0.48	52.09	74.00	-21.91	peak
6	5150.000	41.49	-0.48	41.01	54.00	-12.99	AVG
7	5207.300	114.42	-0.36	114.06	--	--	peak
8	5350.000	50.72	-0.08	50.64	74.00	-23.36	peak
9	5430.600	53.10	0.08	53.18	74.00	-20.82	peak
10	5430.600	41.26	0.08	41.34	54.00	-12.66	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

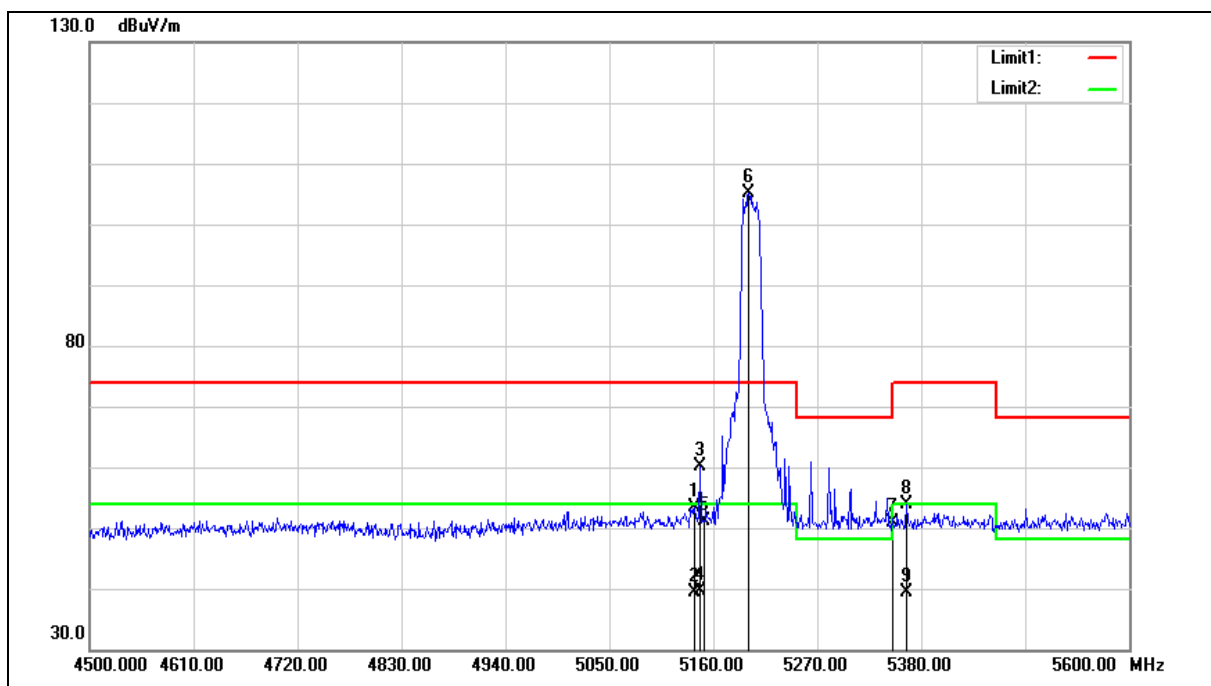

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5140.200	53.97	-0.49	53.48	74.00	-20.52	peak
2	5140.200	39.82	-0.49	39.33	54.00	-14.67	AVG
3	5145.700	60.56	-0.48	60.08	74.00	-13.92	peak
4	5145.700	40.10	-0.48	39.62	54.00	-14.38	AVG
5	5150.000	51.49	-0.48	51.01	74.00	-22.99	peak
6	5197.400	105.57	-0.38	105.19	--	--	peak
7	5350.000	50.85	-0.08	50.77	74.00	-23.23	peak
8	5364.600	53.99	-0.05	53.94	74.00	-20.06	peak
9	5364.600	39.32	-0.05	39.27	54.00	-14.73	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

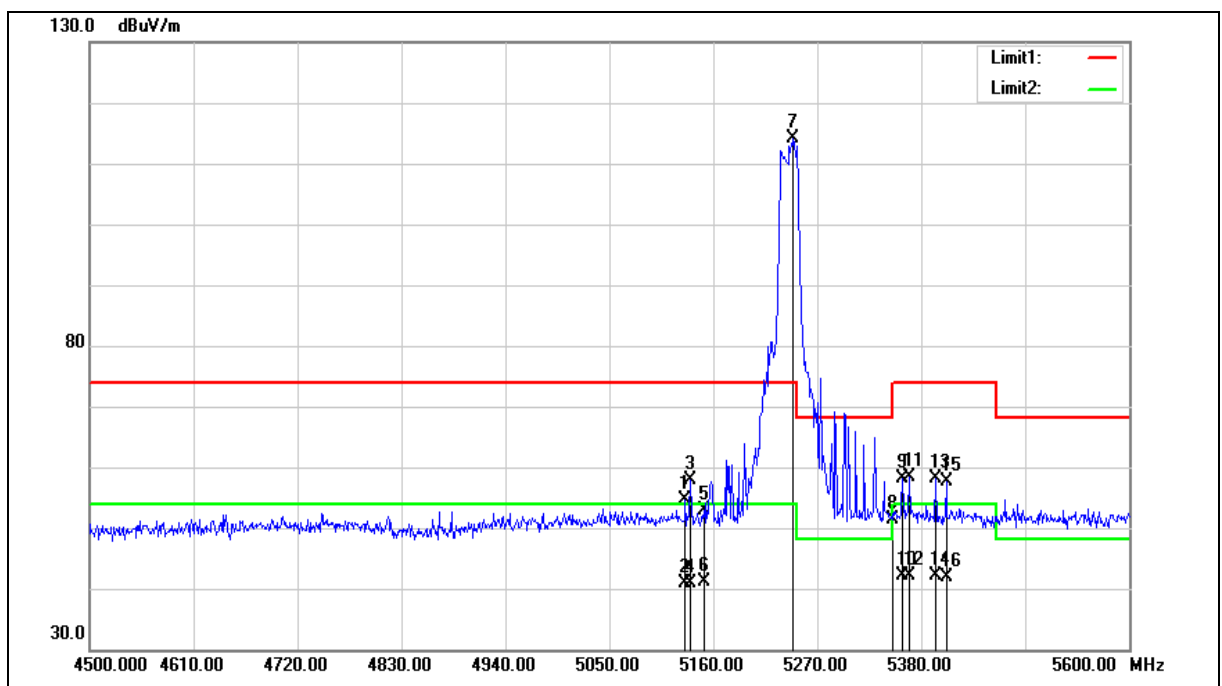

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5130.300	55.26	-0.52	54.74	74.00	-19.26	peak
2	5130.300	41.33	-0.52	40.81	54.00	-13.19	AVG
3	5135.800	58.37	-0.50	57.87	74.00	-16.13	peak
4	5135.800	41.28	-0.50	40.78	54.00	-13.22	AVG
5	5150.000	53.30	-0.48	52.82	74.00	-21.18	peak
6	5150.000	41.55	-0.48	41.07	54.00	-12.93	AVG
7	5244.700	114.35	-0.28	114.07	--	--	peak
8	5350.000	51.44	-0.08	51.36	74.00	-22.64	peak
9	5360.200	58.11	-0.06	58.05	74.00	-15.95	peak
10	5360.200	42.31	-0.06	42.25	54.00	-11.75	AVG
11	5366.800	58.31	-0.05	58.26	74.00	-15.74	peak
12	5366.800	42.25	-0.05	42.20	54.00	-11.80	AVG
13	5395.400	58.08	0.01	58.09	74.00	-15.91	peak
14	5395.400	42.03	0.01	42.04	54.00	-11.96	AVG
15	5406.400	57.66	0.04	57.70	74.00	-16.30	peak
16	5406.400	41.91	0.04	41.95	54.00	-12.05	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

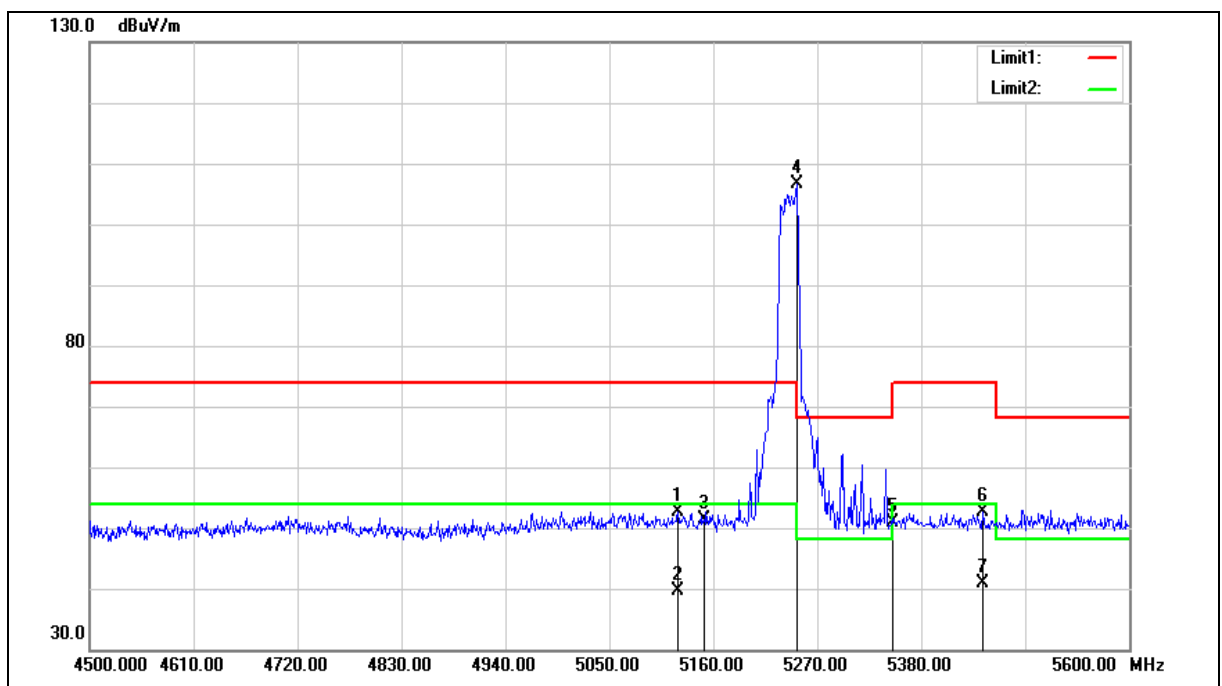

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5122.600	53.23	-0.53	52.70	74.00	-21.30	peak
2	5122.600	40.10	-0.53	39.57	54.00	-14.43	AVG
3	5150.000	51.82	-0.48	51.34	74.00	-22.66	peak
4	5248.000	106.99	-0.28	106.71	--	--	peak
5	5350.000	50.88	-0.08	50.80	74.00	-23.20	peak
6	5444.900	52.60	0.11	52.71	74.00	-21.29	peak
7	5444.900	40.78	0.11	40.89	54.00	-13.11	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

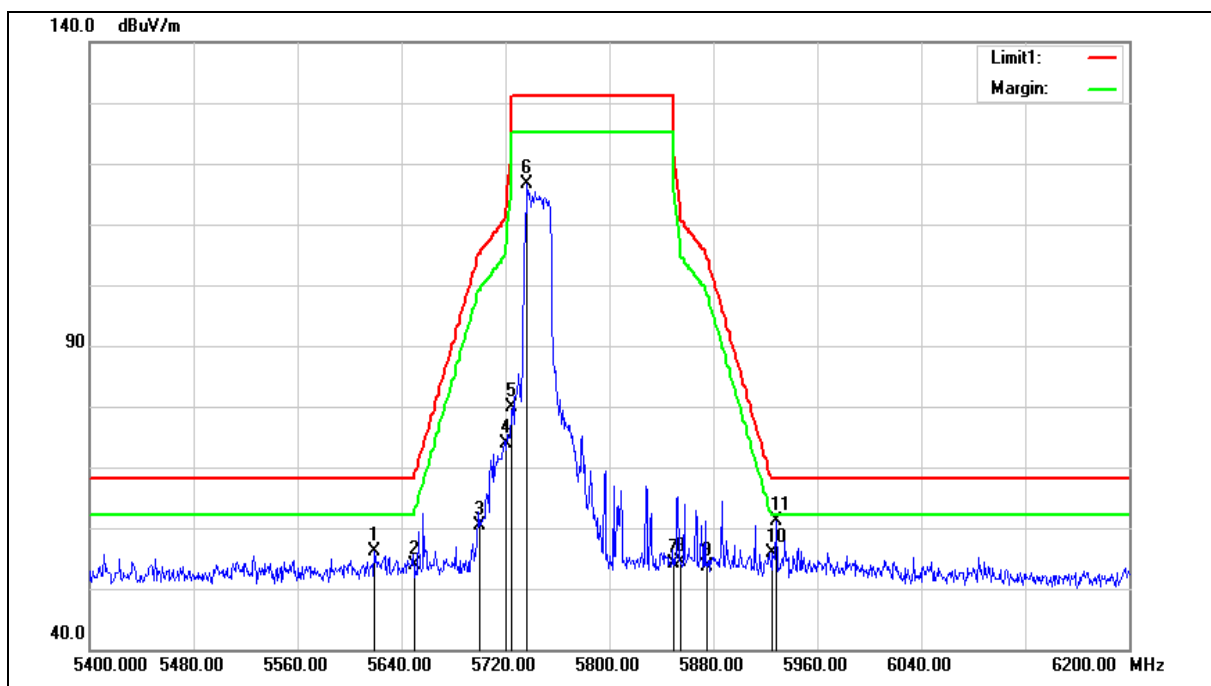

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5619.200	55.68	0.54	56.22	68.20	-11.98	peak
2	5650.000	53.17	0.62	53.79	68.20	-14.41	peak
3	5700.000	59.52	0.75	60.27	105.20	-44.93	peak
4	5720.000	73.09	0.81	73.90	110.80	-36.90	peak
5	5725.000	79.07	0.82	79.89	122.20	-42.31	peak
6	5736.800	115.65	0.86	116.51	--	--	peak
7	5850.000	53.08	1.17	54.25	122.20	-67.95	peak
8	5855.000	53.14	1.18	54.32	110.80	-56.48	peak
9	5875.000	52.49	1.23	53.72	105.20	-51.48	peak
10	5925.000	54.43	1.37	55.80	68.20	-12.40	peak
11	5928.800	59.86	1.38	61.24	68.20	-6.96	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

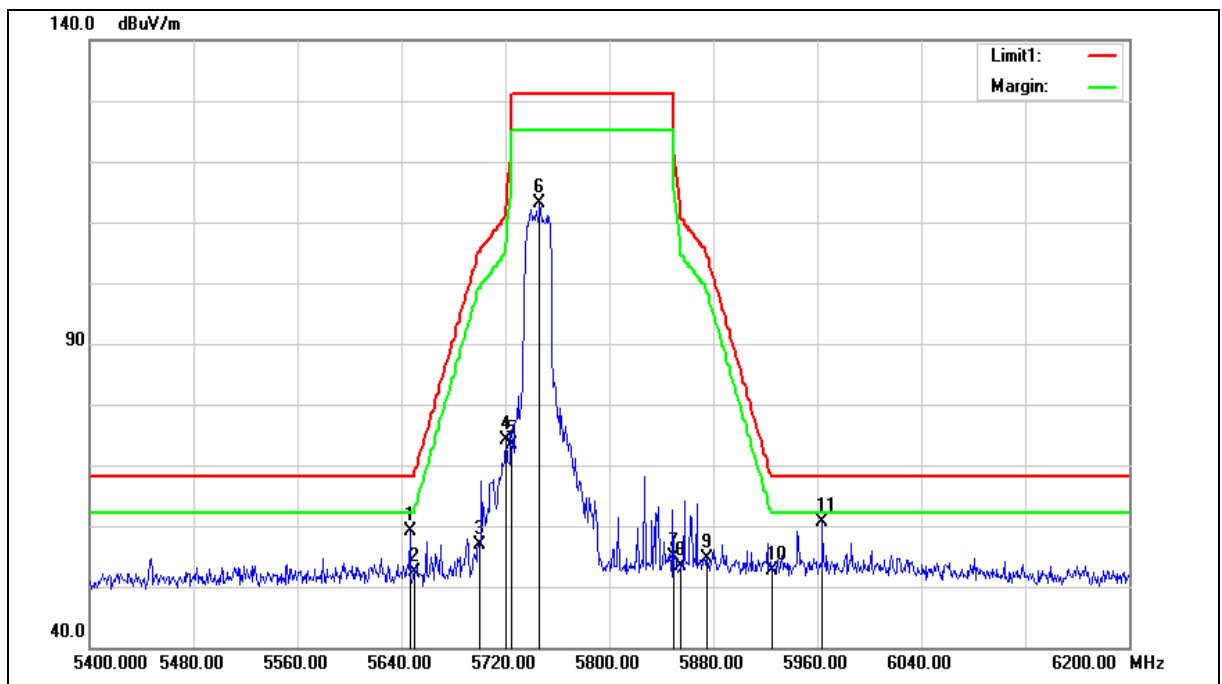

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5646.400	58.51	0.61	59.12	68.20	-9.08	peak
2	5650.000	51.67	0.62	52.29	68.20	-15.91	peak
3	5700.000	56.11	0.75	56.86	105.20	-48.34	peak
4	5720.000	73.33	0.81	74.14	110.80	-36.66	peak
5	5725.000	72.65	0.82	73.47	122.20	-48.73	peak
6	5746.400	112.15	0.88	113.03	--	--	peak
7	5850.000	53.69	1.17	54.86	122.20	-67.34	peak
8	5855.000	52.27	1.18	53.45	110.80	-57.35	peak
9	5875.000	53.35	1.23	54.58	105.20	-50.62	peak
10	5925.000	51.37	1.37	52.74	68.20	-15.46	peak
11	5964.000	59.21	1.47	60.68	68.20	-7.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

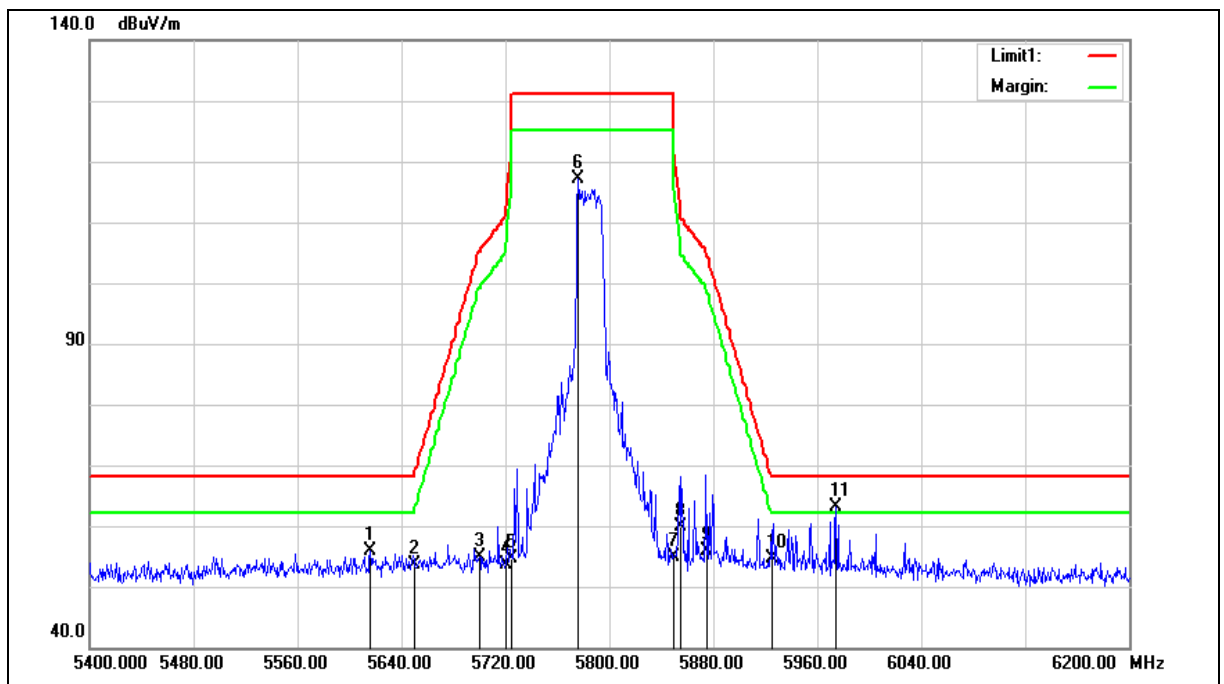

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5616.000	55.29	0.54	55.83	68.20	-12.37	peak
2	5650.000	53.12	0.62	53.74	68.20	-14.46	peak
3	5700.000	54.17	0.75	54.92	105.20	-50.28	peak
4	5720.000	52.94	0.81	53.75	110.80	-57.05	peak
5	5725.000	53.77	0.82	54.59	122.20	-67.61	peak
6	5776.000	116.09	0.97	117.06	--	--	peak
7	5850.000	53.83	1.17	55.00	122.20	-67.20	peak
8	5855.000	58.82	1.18	60.00	110.80	-50.80	peak
9	5875.000	54.68	1.23	55.91	105.20	-49.29	peak
10	5925.000	53.21	1.37	54.58	68.20	-13.62	peak
11	5974.400	61.52	1.50	63.02	68.20	-5.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

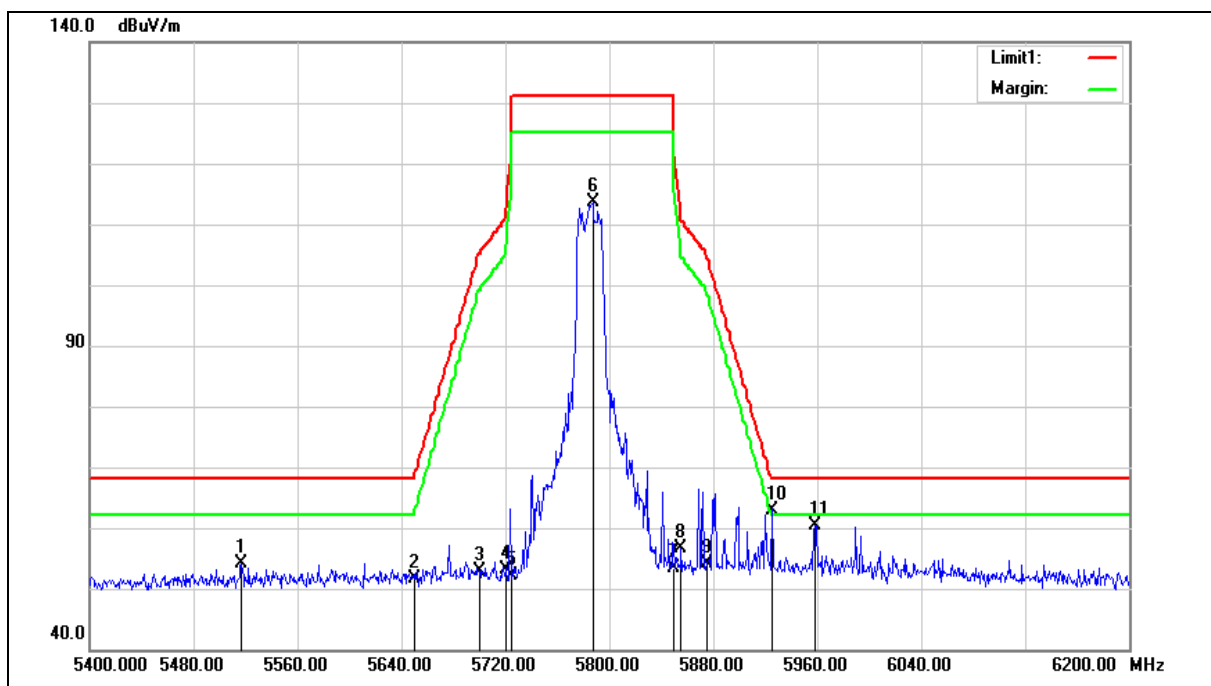

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5516.800	53.85	0.27	54.12	68.20	-14.08	peak
2	5650.000	51.07	0.62	51.69	68.20	-16.51	peak
3	5700.000	52.23	0.75	52.98	105.20	-52.22	peak
4	5720.000	52.44	0.81	53.25	110.80	-57.55	peak
5	5725.000	51.29	0.82	52.11	122.20	-70.09	peak
6	5787.200	112.72	0.99	113.71	--	--	peak
7	5850.000	52.20	1.17	53.37	122.20	-68.83	peak
8	5855.000	55.46	1.18	56.64	110.80	-54.16	peak
9	5875.000	52.79	1.23	54.02	105.20	-51.18	peak
10	5925.000	61.48	1.37	62.85	68.20	-5.35	peak
11	5958.400	59.04	1.45	60.49	68.20	-7.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

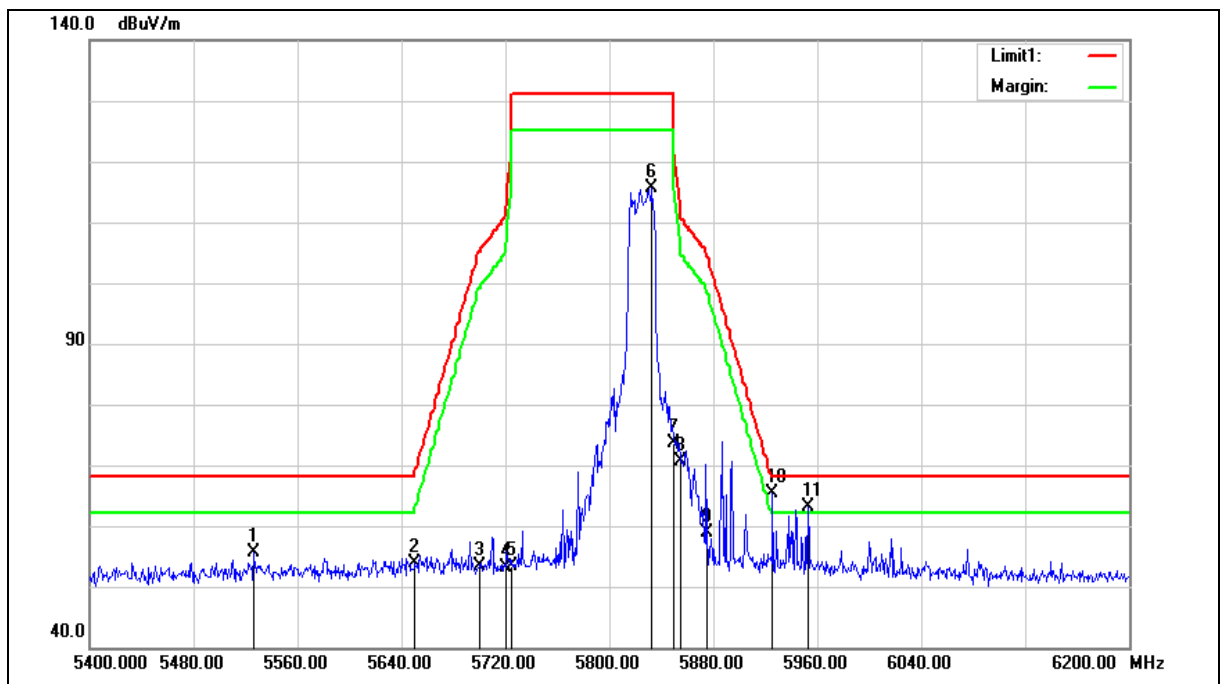

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5526.400	55.39	0.28	55.67	68.20	-12.53	peak
2	5650.000	53.18	0.62	53.80	68.20	-14.40	peak
3	5700.000	52.52	0.75	53.27	105.20	-51.93	peak
4	5720.000	52.34	0.81	53.15	110.80	-57.65	peak
5	5725.000	52.66	0.82	53.48	122.20	-68.72	peak
6	5832.800	114.40	1.11	115.51	--	--	peak
7	5850.000	72.53	1.17	73.70	122.20	-48.50	peak
8	5855.000	69.46	1.18	70.64	110.80	-40.16	peak
9	5875.000	57.72	1.23	58.95	105.20	-46.25	peak
10	5925.000	64.13	1.37	65.50	68.20	-2.70	peak
11	5952.800	61.79	1.44	63.23	68.20	-4.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

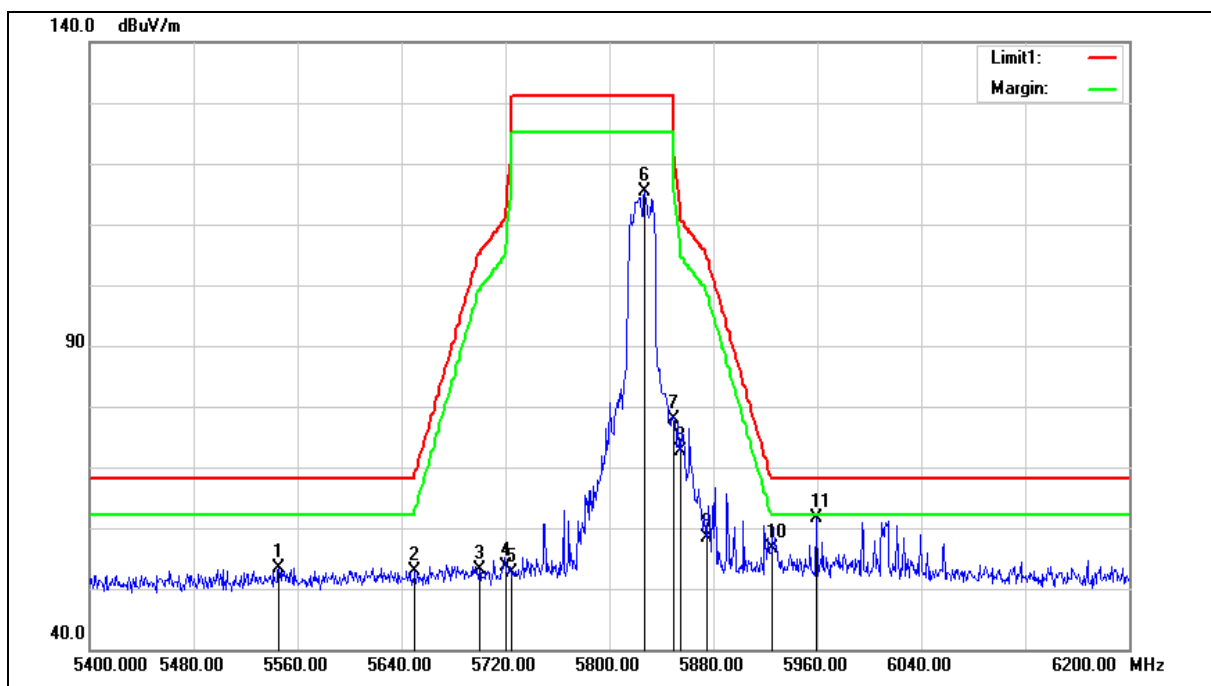

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5545.600	53.15	0.34	53.49	68.20	-14.71	peak
2	5650.000	52.31	0.62	52.93	68.20	-15.27	peak
3	5700.000	52.29	0.75	53.04	105.20	-52.16	peak
4	5720.000	52.77	0.81	53.58	110.80	-57.22	peak
5	5725.000	51.82	0.82	52.64	122.20	-69.56	peak
6	5827.200	114.30	1.10	115.40	--	--	peak
7	5850.000	76.80	1.17	77.97	122.20	-44.23	peak
8	5855.000	71.47	1.18	72.65	110.80	-38.15	peak
9	5875.000	57.20	1.23	58.43	105.20	-46.77	peak
10	5925.000	55.22	1.37	56.59	68.20	-11.61	peak
11	5959.200	60.29	1.45	61.74	68.20	-6.46	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

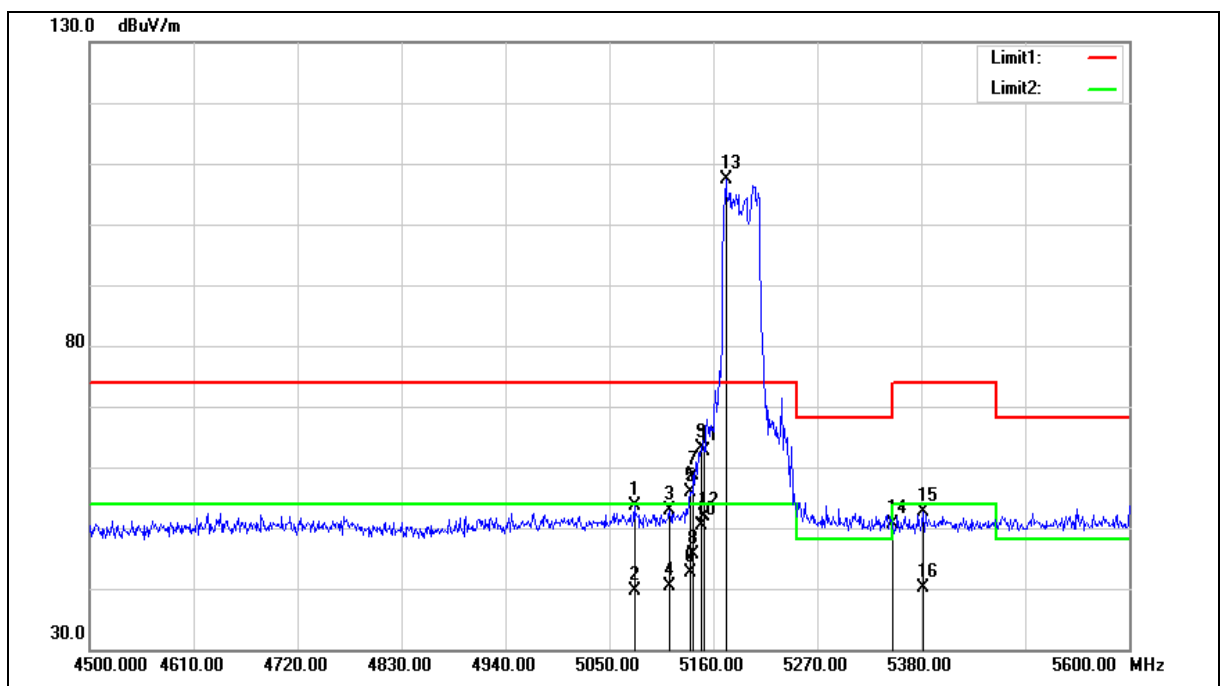

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5076.400	54.24	-0.62	53.62	74.00	-20.38	peak
2	5076.400	40.36	-0.62	39.74	54.00	-14.26	AVG
3	5113.800	53.43	-0.55	52.88	74.00	-21.12	peak
4	5113.800	40.91	-0.55	40.36	54.00	-13.64	AVG
5	5135.800	56.46	-0.50	55.96	74.00	-18.04	peak
6	5135.800	43.24	-0.50	42.74	54.00	-11.26	AVG
7	5139.100	59.09	-0.49	58.60	74.00	-15.40	peak
8	5139.100	46.09	-0.49	45.60	54.00	-8.40	AVG
9	5146.800	63.66	-0.48	63.18	74.00	-10.82	peak
10	5146.800	50.78	-0.48	50.30	54.00	-3.70	AVG
11	5150.000	63.08	-0.48	62.60	74.00	-11.40	peak
12	5150.000	52.46	-0.48	51.98	54.00	-2.02	AVG
13	5173.200	107.87	-0.43	107.44	--	--	peak
14	5350.000	50.67	-0.08	50.59	74.00	-23.41	peak
15	5382.200	52.56	-0.02	52.54	74.00	-21.46	peak
16	5382.200	40.17	-0.02	40.15	54.00	-13.85	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

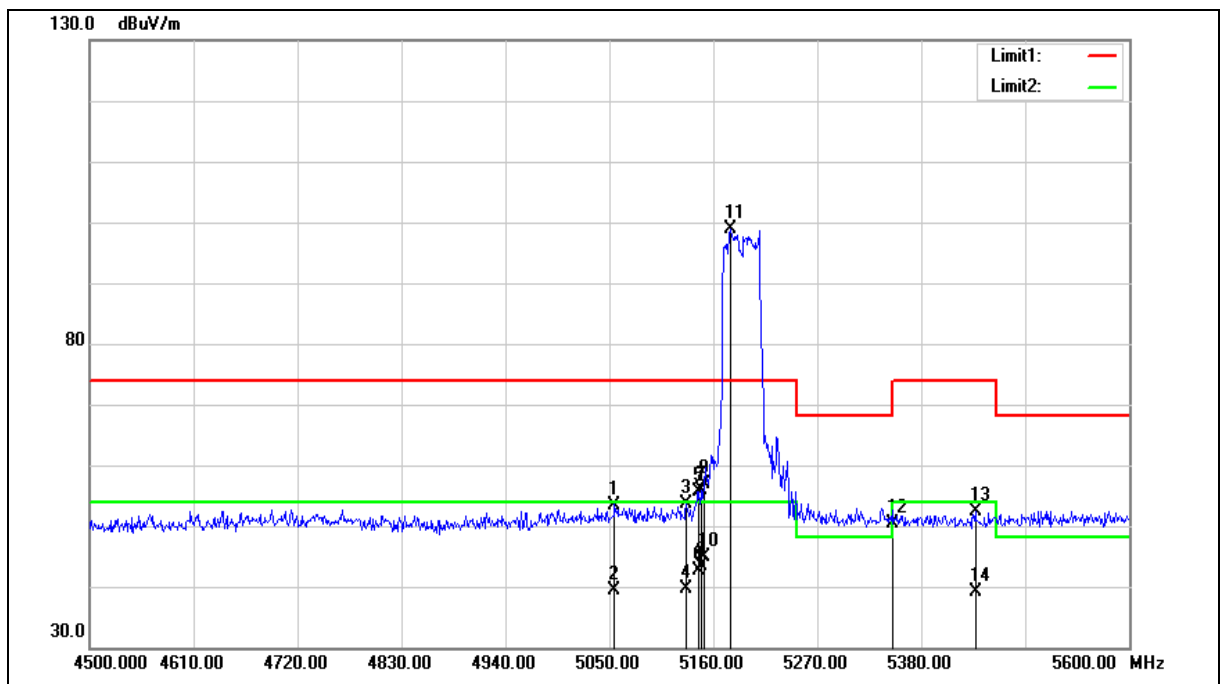

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5055.500	54.16	-0.66	53.50	74.00	-20.50	peak
2	5055.500	39.96	-0.66	39.30	54.00	-14.70	AVG
3	5131.400	54.21	-0.51	53.70	74.00	-20.30	peak
4	5131.400	40.10	-0.51	39.59	54.00	-14.41	AVG
5	5144.600	56.11	-0.48	55.63	74.00	-18.37	peak
6	5144.600	43.17	-0.48	42.69	54.00	-11.31	AVG
7	5146.800	56.47	-0.48	55.99	74.00	-18.01	peak
8	5146.800	43.84	-0.48	43.36	54.00	-10.64	AVG
9	5150.000	57.25	-0.48	56.77	74.00	-17.23	peak
10	5150.000	45.48	-0.48	45.00	54.00	-9.00	AVG
11	5178.700	99.38	-0.42	98.96	--	--	peak
12	5350.000	50.57	-0.08	50.49	74.00	-23.51	peak
13	5437.200	52.30	0.09	52.39	74.00	-21.61	peak
14	5437.200	39.10	0.09	39.19	54.00	-14.81	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

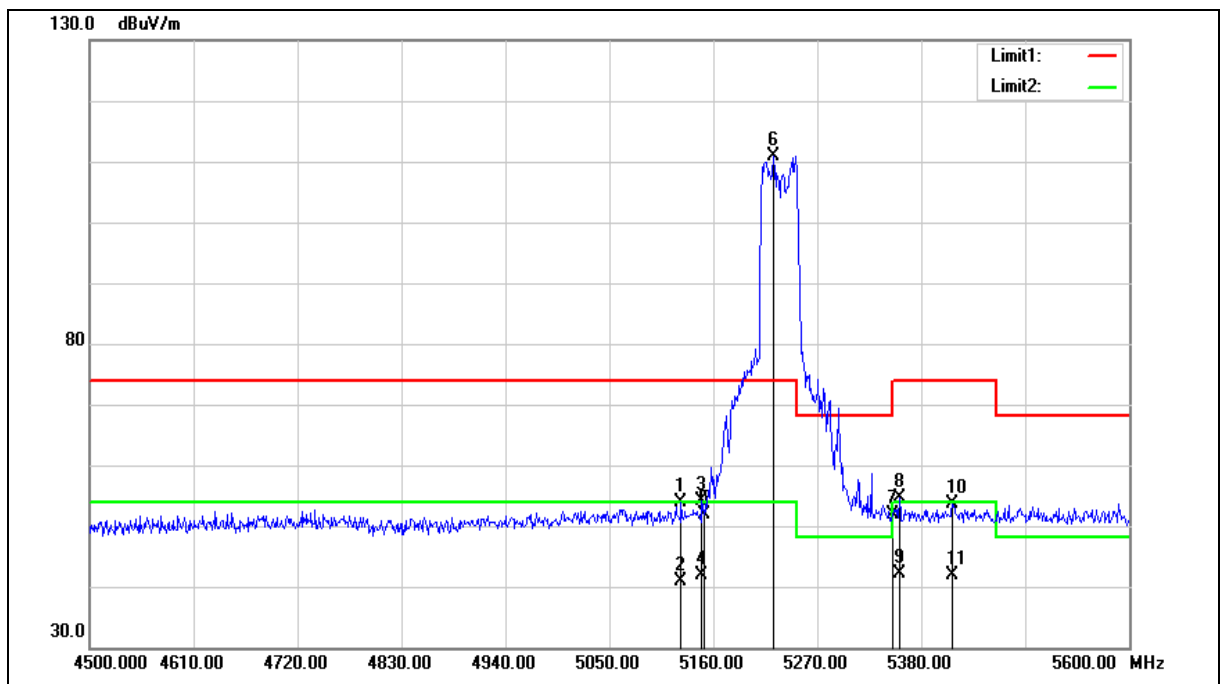

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5125.900	54.35	-0.52	53.83	74.00	-20.17	peak
2	5125.900	41.50	-0.52	40.98	54.00	-13.02	AVG
3	5147.900	54.63	-0.48	54.15	74.00	-19.85	peak
4	5147.900	42.30	-0.48	41.82	54.00	-12.18	AVG
5	5150.000	52.42	-0.48	51.94	74.00	-22.06	peak
6	5223.800	111.24	-0.33	110.91	--	--	peak
7	5350.000	51.95	-0.08	51.87	74.00	-22.13	peak
8	5356.900	54.58	-0.06	54.52	74.00	-19.48	peak
9	5356.900	42.26	-0.06	42.20	54.00	-11.80	AVG
10	5413.000	53.66	0.04	53.70	74.00	-20.30	peak
11	5413.000	41.84	0.04	41.88	54.00	-12.12	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

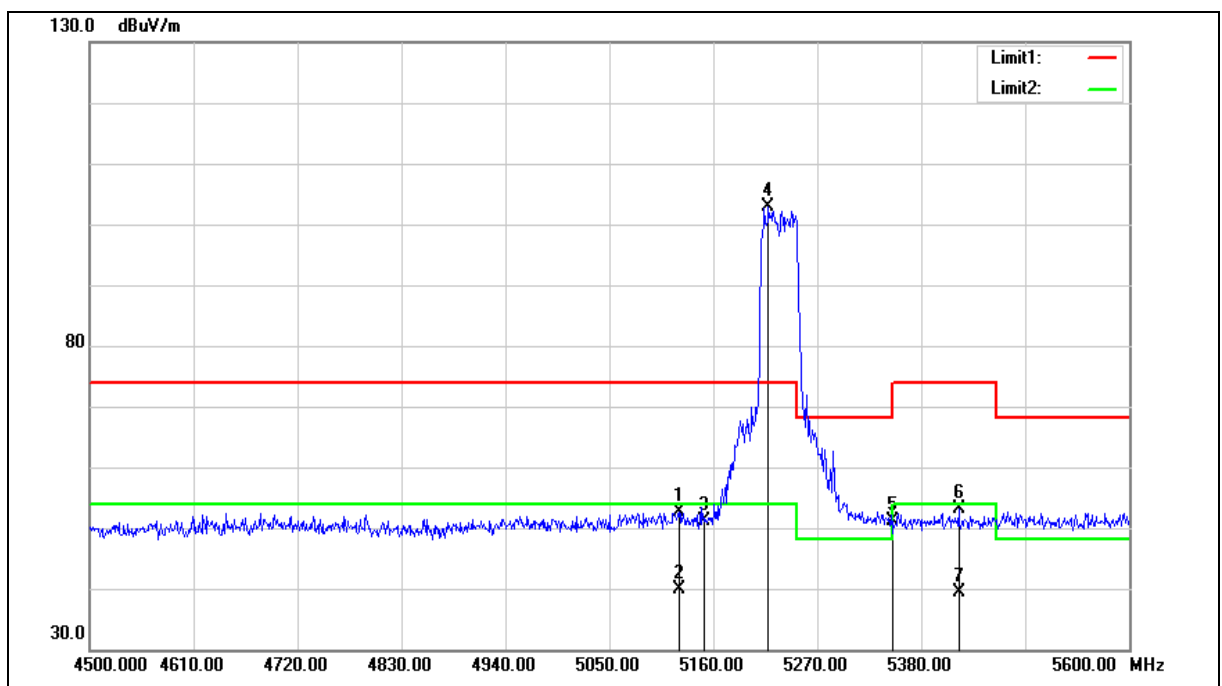

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5123.700	53.24	-0.52	52.72	74.00	-21.28	peak
2	5123.700	40.37	-0.52	39.85	54.00	-14.15	AVG
3	5150.000	51.65	-0.48	51.17	74.00	-22.83	peak
4	5218.300	103.11	-0.35	102.76	--	--	peak
5	5350.000	51.27	-0.08	51.19	74.00	-22.81	peak
6	5419.600	53.04	0.06	53.10	74.00	-20.90	peak
7	5419.600	39.35	0.06	39.41	54.00	-14.59	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

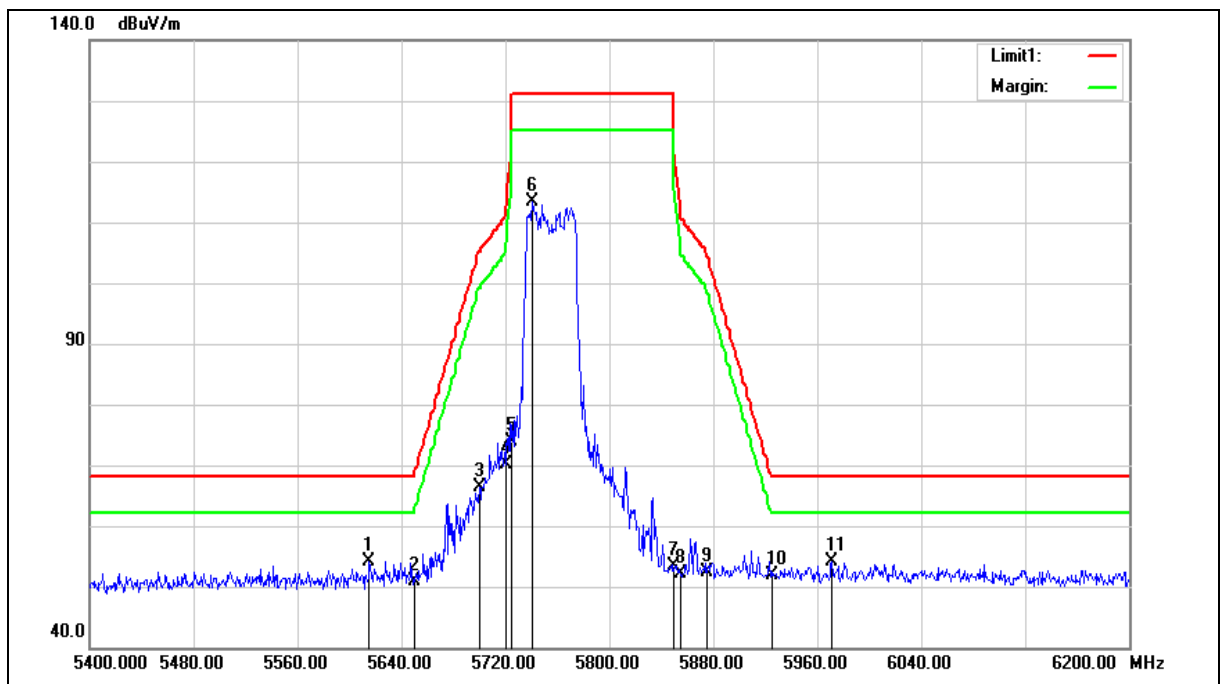

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5615.200	53.66	0.52	54.18	68.20	-14.02	peak
2	5650.000	50.25	0.62	50.87	68.20	-17.33	peak
3	5700.000	65.55	0.75	66.30	105.20	-38.90	peak
4	5720.000	69.43	0.81	70.24	110.80	-40.56	peak
5	5725.000	73.09	0.82	73.91	122.20	-48.29	peak
6	5740.800	112.40	0.87	113.27	--	--	peak
7	5850.000	52.09	1.17	53.26	122.20	-68.94	peak
8	5855.000	51.02	1.18	52.20	110.80	-58.60	peak
9	5875.000	51.07	1.23	52.30	105.20	-52.90	peak
10	5925.000	50.54	1.37	51.91	68.20	-16.29	peak
11	5971.200	52.65	1.49	54.14	68.20	-14.06	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

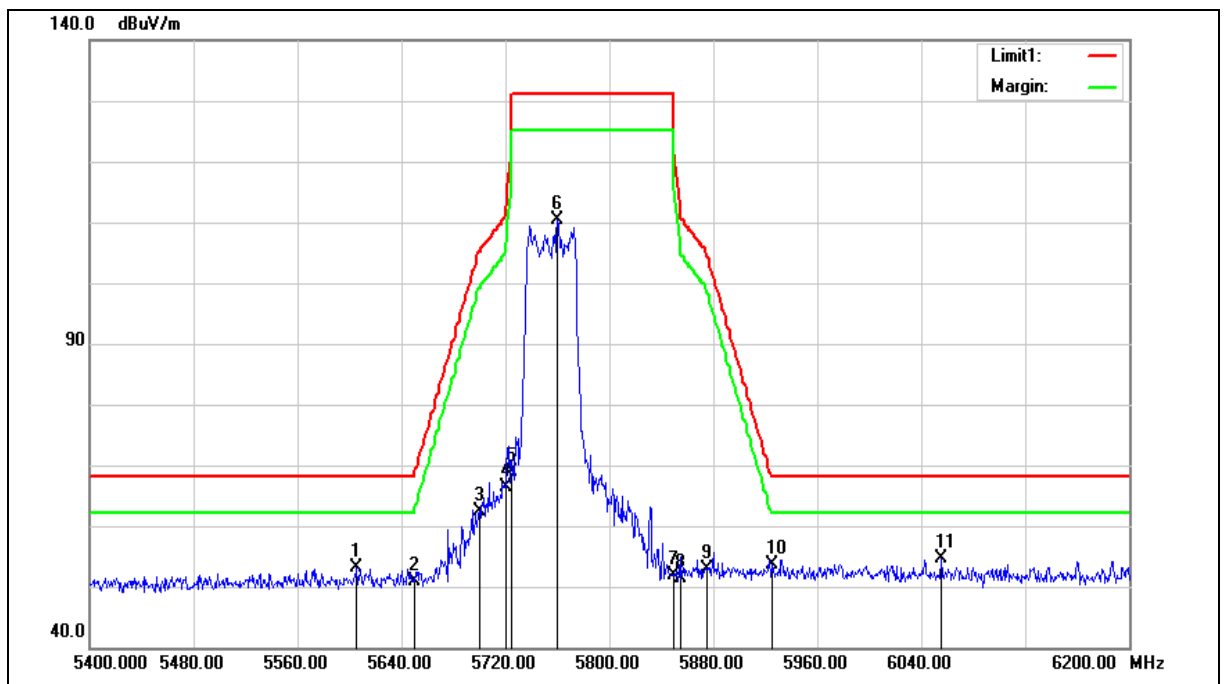

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5605.600	52.55	0.50	53.05	68.20	-15.15	peak
2	5650.000	50.24	0.62	50.86	68.20	-17.34	peak
3	5700.000	61.73	0.75	62.48	105.20	-42.72	peak
4	5720.000	65.54	0.81	66.35	110.80	-44.45	peak
5	5725.000	68.11	0.82	68.93	122.20	-53.27	peak
6	5760.000	109.38	0.92	110.30	--	--	peak
7	5850.000	50.73	1.17	51.90	122.20	-70.30	peak
8	5855.000	50.24	1.18	51.42	110.80	-59.38	peak
9	5875.000	51.72	1.23	52.95	105.20	-52.25	peak
10	5925.000	52.33	1.37	53.70	68.20	-14.50	peak
11	6055.200	52.77	1.77	54.54	68.20	-13.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

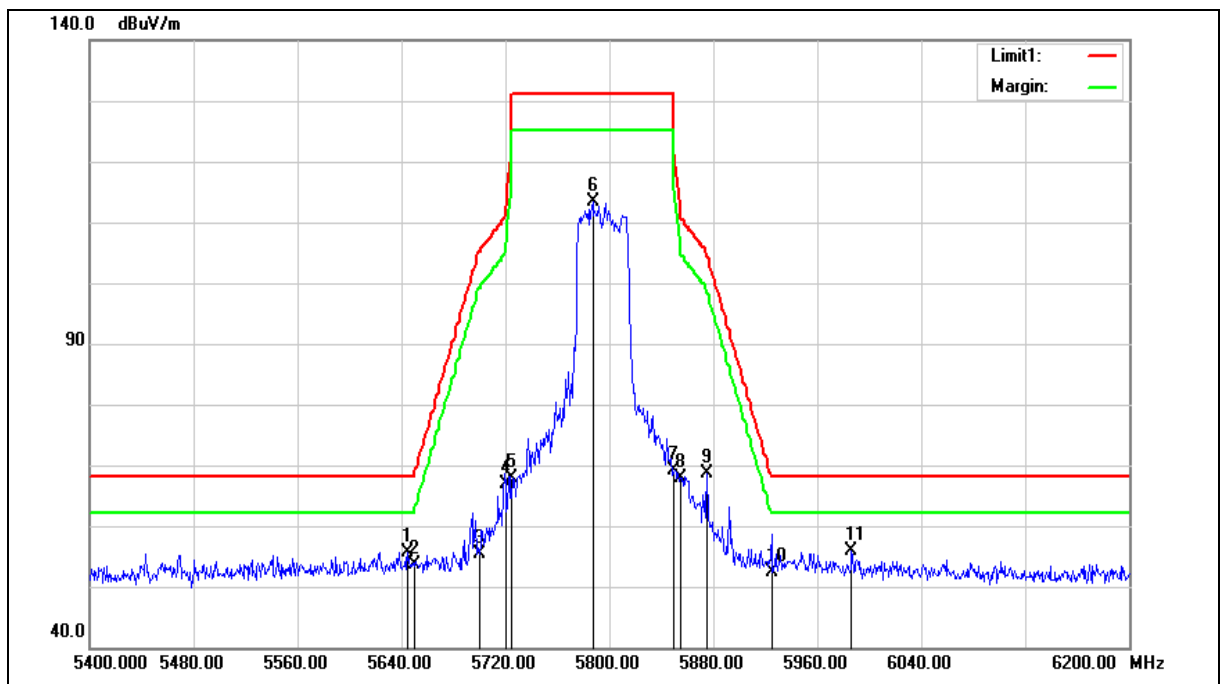

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5644.800	54.99	0.60	55.59	68.20	-12.61	peak
2	5650.000	52.97	0.62	53.59	68.20	-14.61	peak
3	5700.000	54.74	0.75	55.49	105.20	-49.71	peak
4	5720.000	65.96	0.81	66.77	110.80	-44.03	peak
5	5725.000	66.97	0.82	67.79	122.20	-54.41	peak
6	5787.200	112.34	0.99	113.33	--	--	peak
7	5850.000	67.87	1.17	69.04	122.20	-53.16	peak
8	5855.000	66.77	1.18	67.95	110.80	-42.85	peak
9	5875.000	67.32	1.23	68.55	105.20	-36.65	peak
10	5925.000	51.12	1.37	52.49	68.20	-15.71	peak
11	5986.400	54.30	1.53	55.83	68.20	-12.37	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

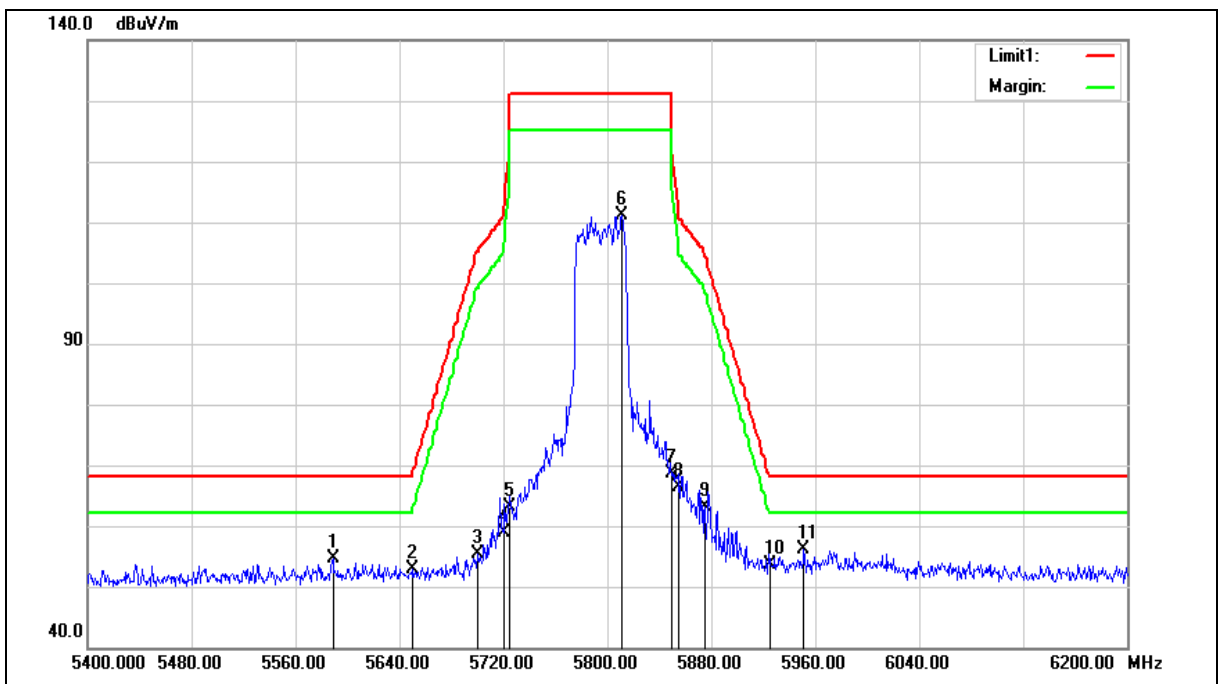

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5588.800	54.11	0.46	54.57	68.20	-13.63	peak
2	5650.000	52.29	0.62	52.91	68.20	-15.29	peak
3	5700.000	54.69	0.75	55.44	105.20	-49.76	peak
4	5720.000	57.95	0.81	58.76	110.80	-52.04	peak
5	5725.000	62.34	0.82	63.16	122.20	-59.04	peak
6	5811.200	110.15	1.06	111.21	--	--	peak
7	5850.000	67.46	1.17	68.63	122.20	-53.57	peak
8	5855.000	65.26	1.18	66.44	110.80	-44.36	peak
9	5875.000	61.96	1.23	63.19	105.20	-42.01	peak
10	5925.000	52.32	1.37	53.69	68.20	-14.51	peak
11	5951.200	54.68	1.44	56.12	68.20	-12.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

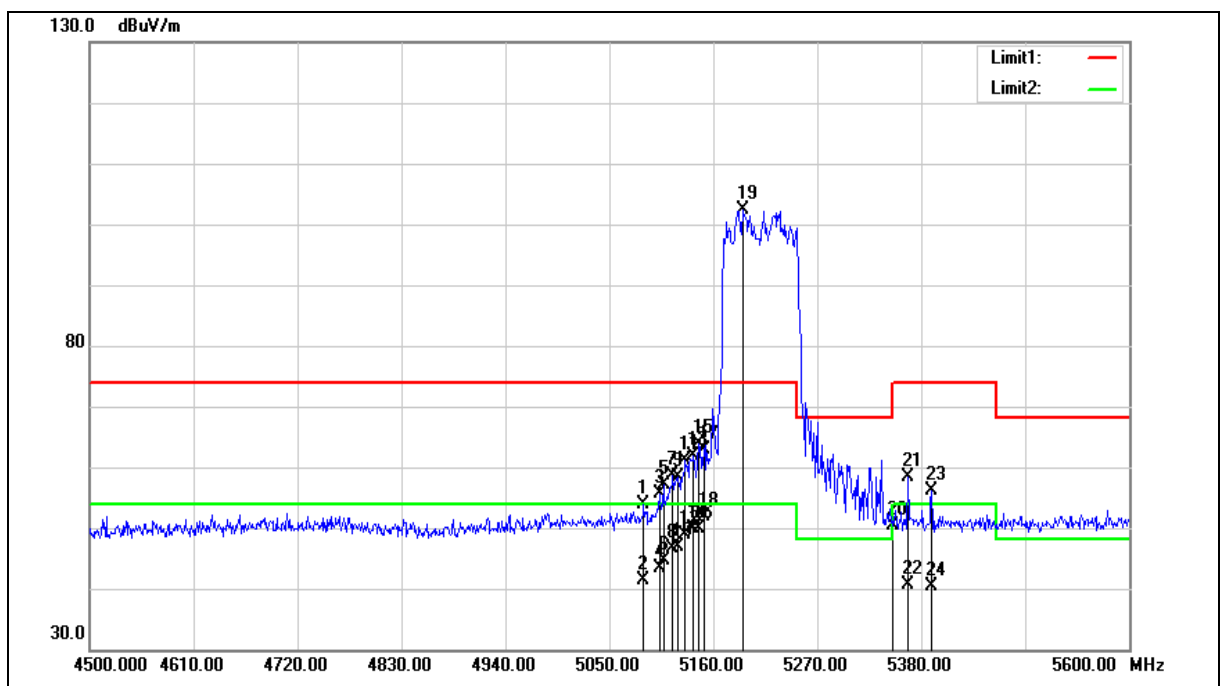

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5086.300	54.44	-0.60	53.84	74.00	-20.16	peak
2	5086.300	42.10	-0.60	41.50	54.00	-12.50	AVG
3	5102.800	56.16	-0.57	55.59	74.00	-18.41	peak
4	5102.800	43.88	-0.57	43.31	54.00	-10.69	AVG
5	5107.200	57.73	-0.56	57.17	74.00	-16.83	peak
6	5107.200	45.11	-0.56	44.55	54.00	-9.45	AVG
7	5117.100	59.10	-0.54	58.56	74.00	-15.44	peak
8	5117.100	47.05	-0.54	46.51	54.00	-7.49	AVG
9	5122.600	58.79	-0.53	58.26	74.00	-15.74	peak
10	5122.600	47.36	-0.53	46.83	54.00	-7.17	AVG
11	5130.300	61.63	-0.52	61.11	74.00	-12.89	peak
12	5130.300	49.42	-0.52	48.90	54.00	-5.10	AVG
13	5139.100	62.27	-0.49	61.78	74.00	-12.22	peak
14	5139.100	50.31	-0.49	49.82	54.00	-4.18	AVG
15	5144.600	64.45	-0.48	63.97	74.00	-10.03	peak
16	5144.600	50.41	-0.48	49.93	54.00	-4.07	AVG
17	5150.000	63.29	-0.48	62.81	74.00	-11.19	peak
18	5150.000	52.27	-0.48	51.79	54.00	-2.21	AVG
19	5190.800	102.84	-0.40	102.44	--	--	peak
20	5350.000	50.34	-0.08	50.26	74.00	-23.74	peak
21	5365.700	58.34	-0.05	58.29	74.00	-15.71	peak
22	5365.700	40.70	-0.05	40.65	54.00	-13.35	AVG
23	5391.000	56.05	0.00	56.05	74.00	-17.95	peak
24	5391.000	40.49	0.00	40.49	54.00	-13.51	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

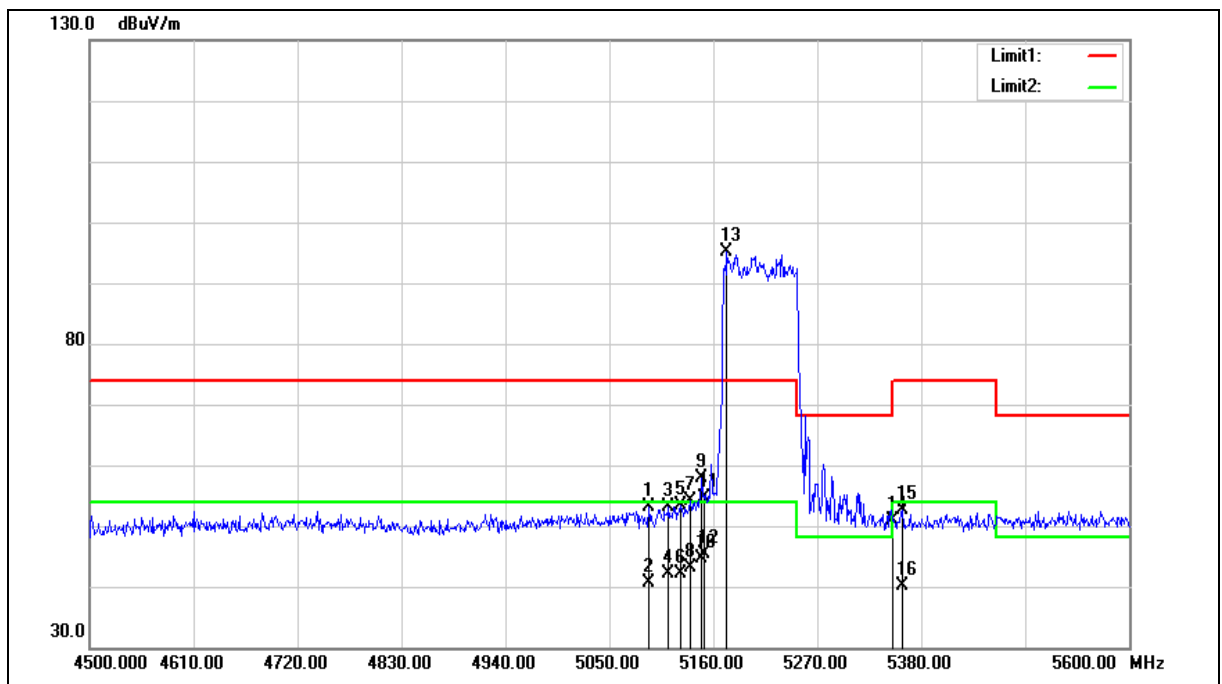

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5091.800	53.62	-0.60	53.02	74.00	-20.98	peak
2	5091.800	41.14	-0.60	40.54	54.00	-13.46	AVG
3	5112.700	53.62	-0.55	53.07	74.00	-20.93	peak
4	5112.700	42.61	-0.55	42.06	54.00	-11.94	AVG
5	5124.800	53.83	-0.52	53.31	74.00	-20.69	peak
6	5124.800	42.64	-0.52	42.12	54.00	-11.88	AVG
7	5135.800	54.51	-0.50	54.01	74.00	-19.99	peak
8	5135.800	43.55	-0.50	43.05	54.00	-10.95	AVG
9	5147.900	58.30	-0.48	57.82	74.00	-16.18	peak
10	5147.900	45.20	-0.48	44.72	54.00	-9.28	AVG
11	5150.000	55.15	-0.48	54.67	74.00	-19.33	peak
12	5150.000	45.86	-0.48	45.38	54.00	-8.62	AVG
13	5174.300	95.57	-0.43	95.14	--	--	peak
14	5350.000	51.02	-0.08	50.94	74.00	-23.06	peak
15	5360.200	52.81	-0.06	52.75	74.00	-21.25	peak
16	5360.200	40.31	-0.06	40.25	54.00	-13.75	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

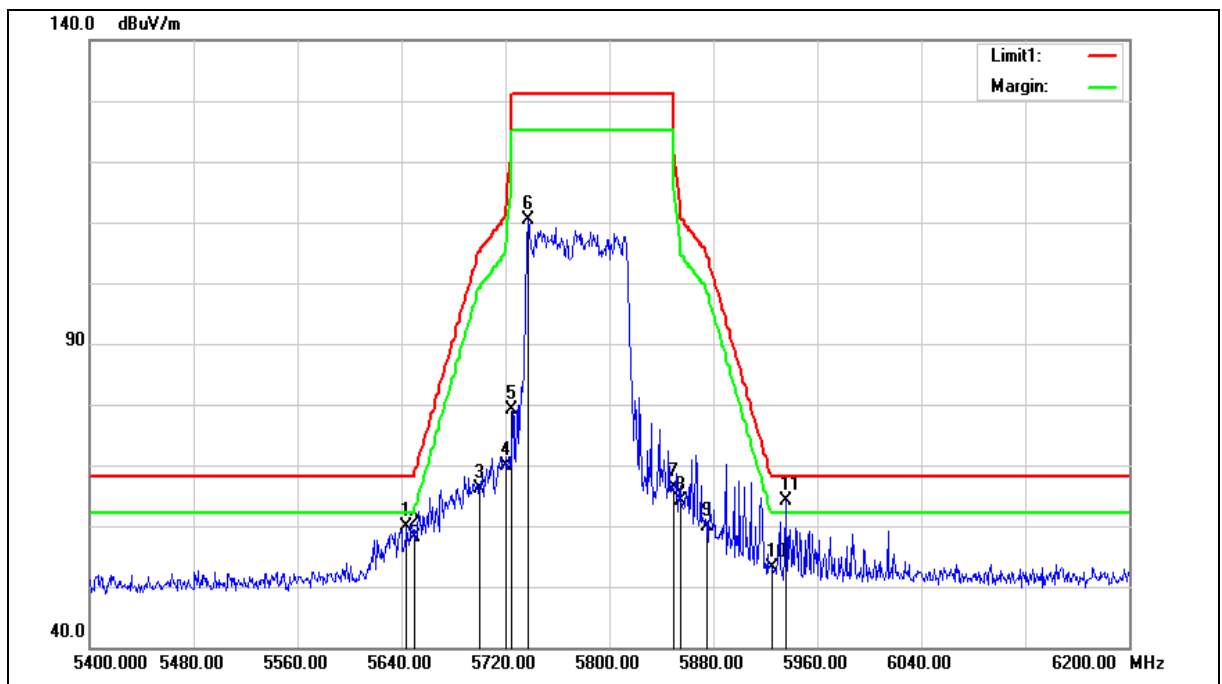

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5644.000	59.21	0.60	59.81	68.20	-8.39	peak
2	5650.000	57.60	0.62	58.22	68.20	-9.98	peak
3	5700.000	65.47	0.75	66.22	105.20	-38.98	peak
4	5720.000	68.98	0.81	69.79	110.80	-41.01	peak
5	5725.000	78.31	0.82	79.13	122.20	-43.07	peak
6	5737.600	109.57	0.86	110.43	--	--	peak
7	5850.000	65.13	1.17	66.30	122.20	-55.90	peak
8	5855.000	63.03	1.18	64.21	110.80	-46.59	peak
9	5875.000	58.58	1.23	59.81	105.20	-45.39	peak
10	5925.000	51.72	1.37	53.09	68.20	-15.11	peak
11	5936.000	62.65	1.40	64.05	68.20	-4.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

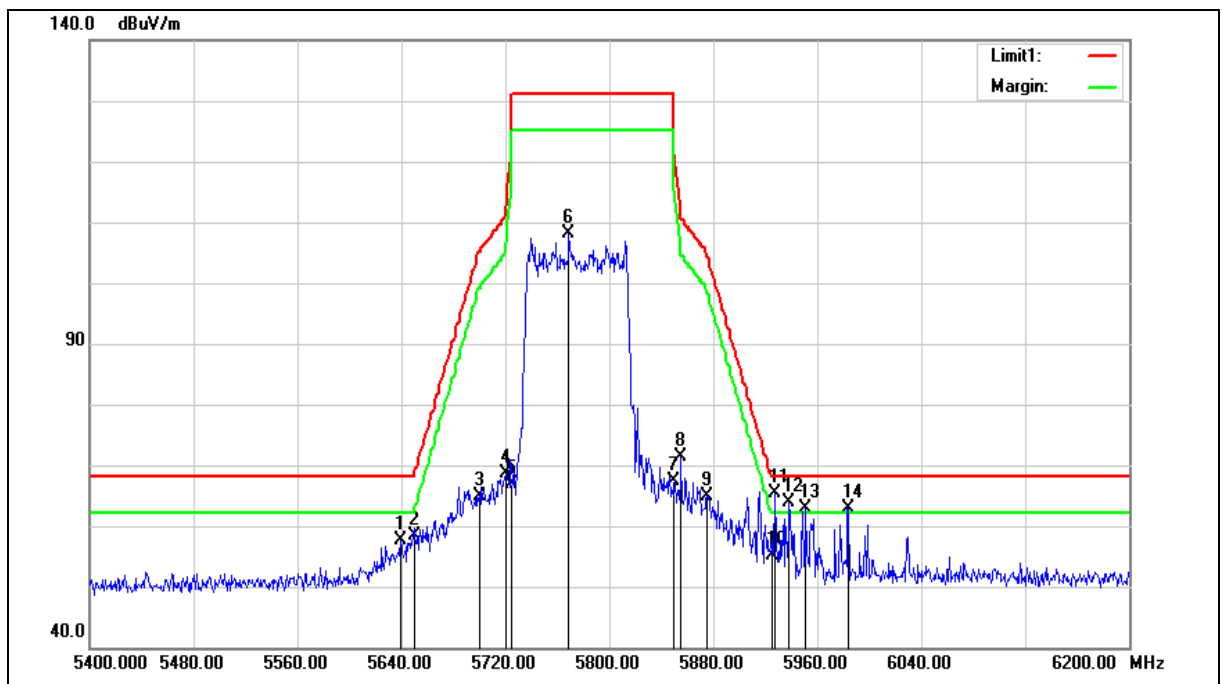

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5639.200	56.98	0.59	57.57	68.20	-10.63	peak
2	5650.000	57.66	0.62	58.28	68.20	-9.92	peak
3	5700.000	64.24	0.75	64.99	105.20	-40.21	peak
4	5720.000	67.76	0.81	68.57	110.80	-42.23	peak
5	5725.000	65.99	0.82	66.81	122.20	-55.39	peak
6	5768.800	107.08	0.94	108.02	--	--	peak
7	5850.000	66.20	1.17	67.37	122.20	-54.83	peak
8	5855.000	70.17	1.18	71.35	110.80	-39.45	peak
9	5875.000	63.57	1.23	64.80	105.20	-40.40	peak
10	5925.000	53.79	1.37	55.16	68.20	-13.04	peak
11	5927.200	64.11	1.37	65.48	68.20	-2.72	peak
12	5938.400	62.59	1.40	63.99	68.20	-4.21	peak
13	5951.200	61.36	1.44	62.80	68.20	-5.40	peak
14	5984.000	61.41	1.52	62.93	68.20	-5.27	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.