


Site: AC1	Time: 2019/01/30 - 22:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT20 at Channel 5825MHz (CDD Mode)	

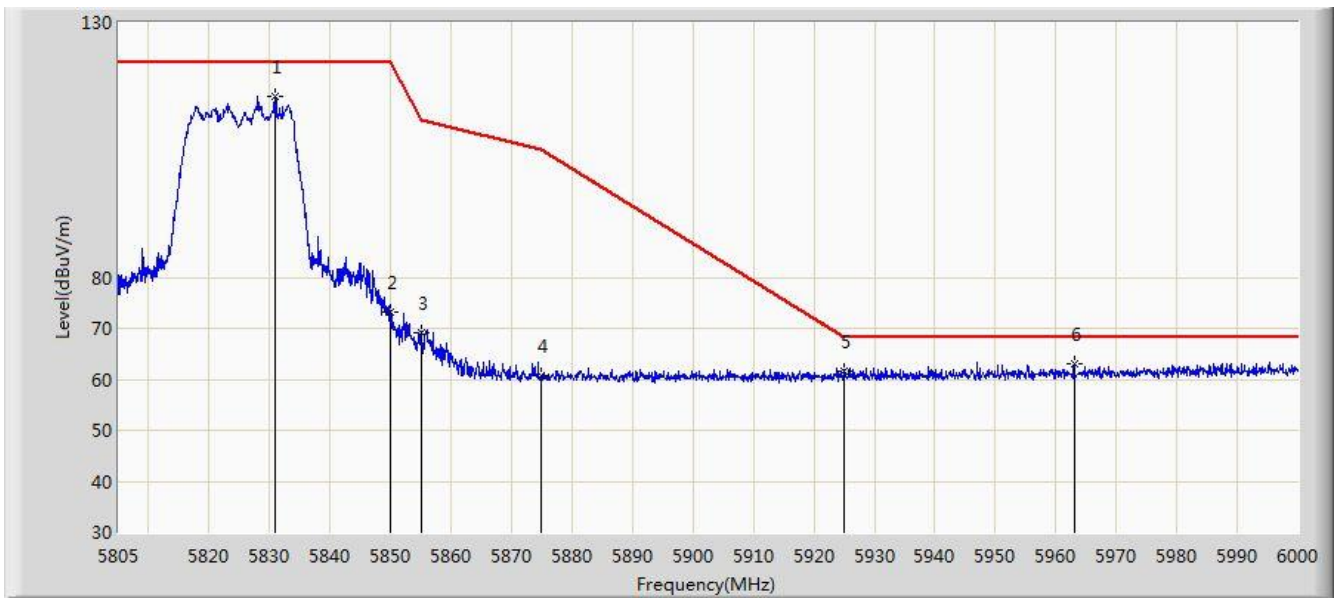


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5830.935	115.598	109.975	N/A	N/A	5.622	PK
2			5850.000	73.270	67.544	-48.930	122.200	5.726	PK
3			5855.000	69.207	63.461	-41.593	110.800	5.746	PK
4			5875.000	60.642	54.822	-44.558	105.200	5.820	PK
5			5925.000	61.475	55.509	-6.725	68.200	5.967	PK
6		*	5963.047	63.120	57.071	-5.080	68.200	6.049	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 23:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 5190MHz (CDD Mode)	

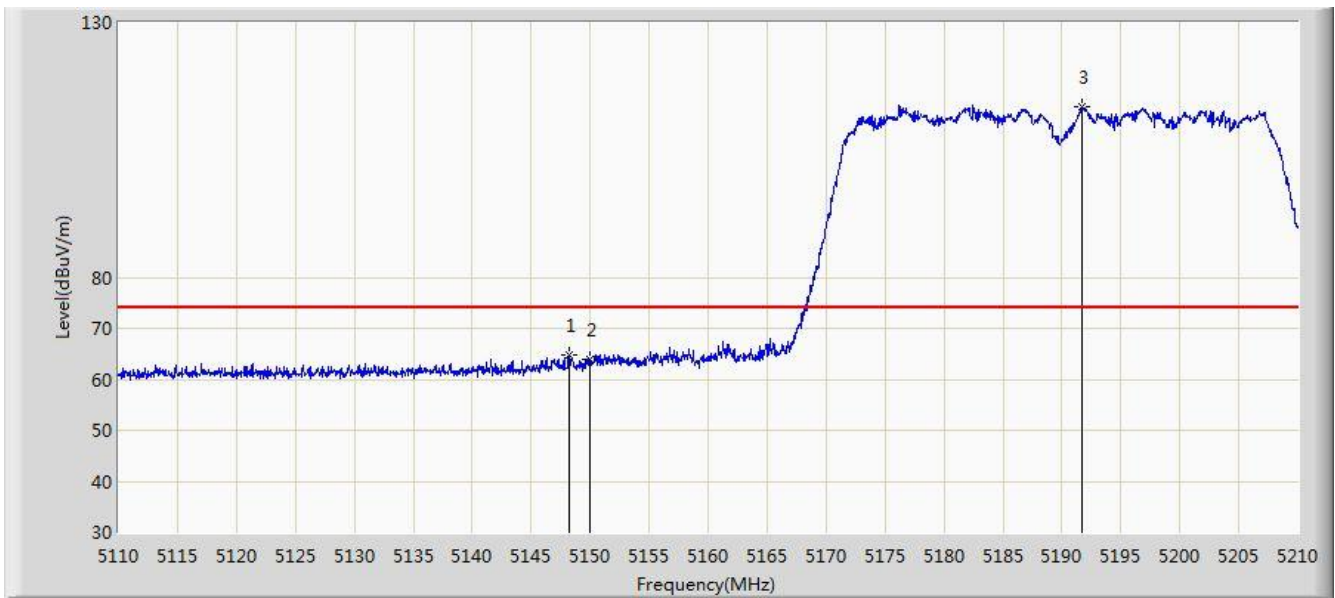


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.200	64.820	60.645	-9.180	74.000	4.174	PK
2			5150.000	64.050	59.881	-9.950	74.000	4.170	PK
3		*	5191.700	113.368	109.341	N/A	N/A	4.027	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 23:53
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 5190MHz (CDD Mode)	

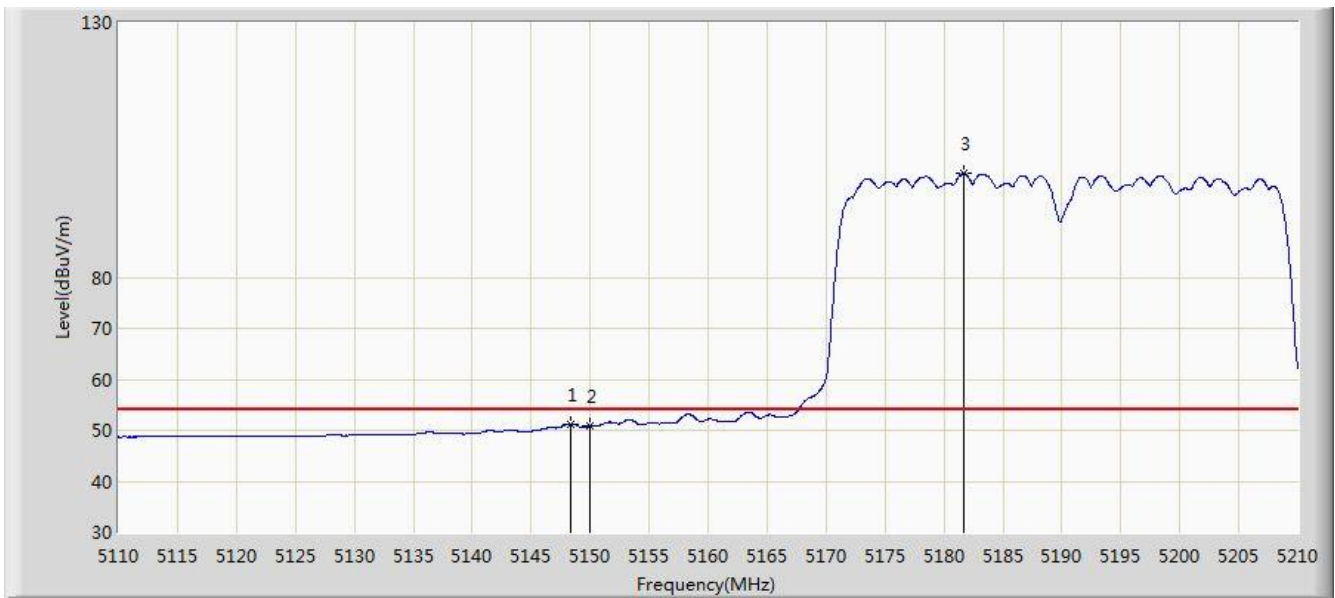


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.350	51.301	47.127	-2.699	54.000	4.174	AV
2			5150.000	50.886	46.717	-3.114	54.000	4.170	AV
3		*	5181.650	100.415	96.352	N/A	N/A	4.063	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 23:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 5190MHz (CDD Mode)	

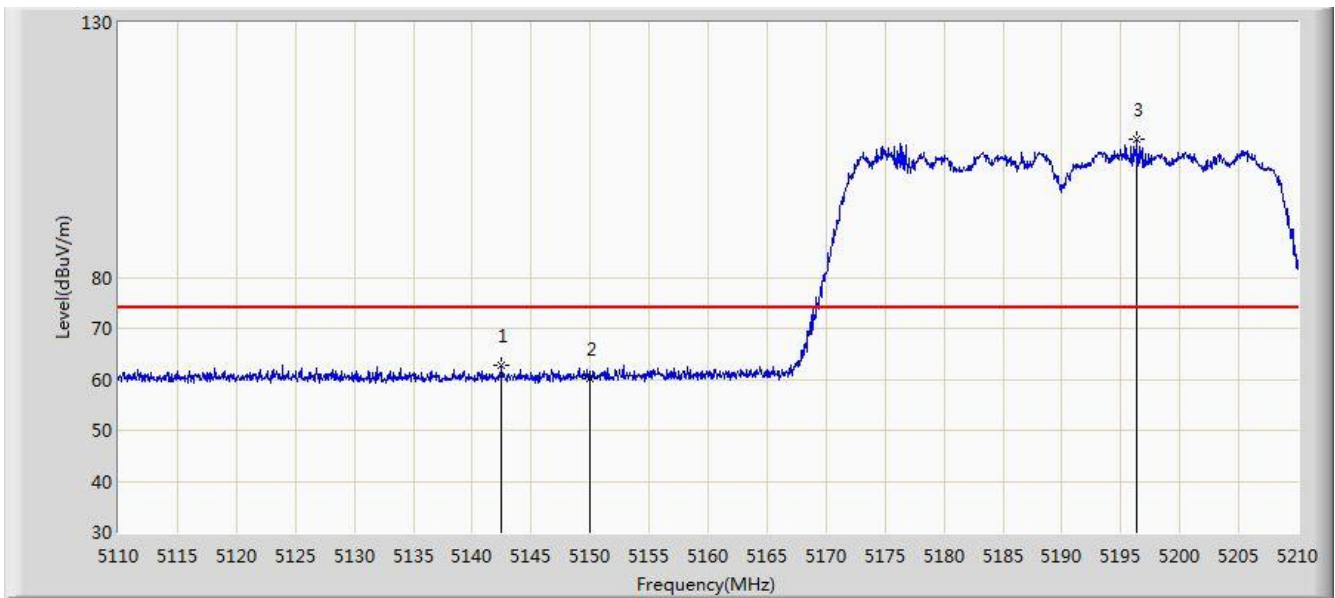


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.450	62.671	58.495	-11.329	74.000	4.175	PK
2			5150.000	60.045	55.876	-13.955	74.000	4.170	PK
3		*	5196.400	107.101	103.090	N/A	N/A	4.010	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/30 - 23:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 5190MHz (CDD Mode)	

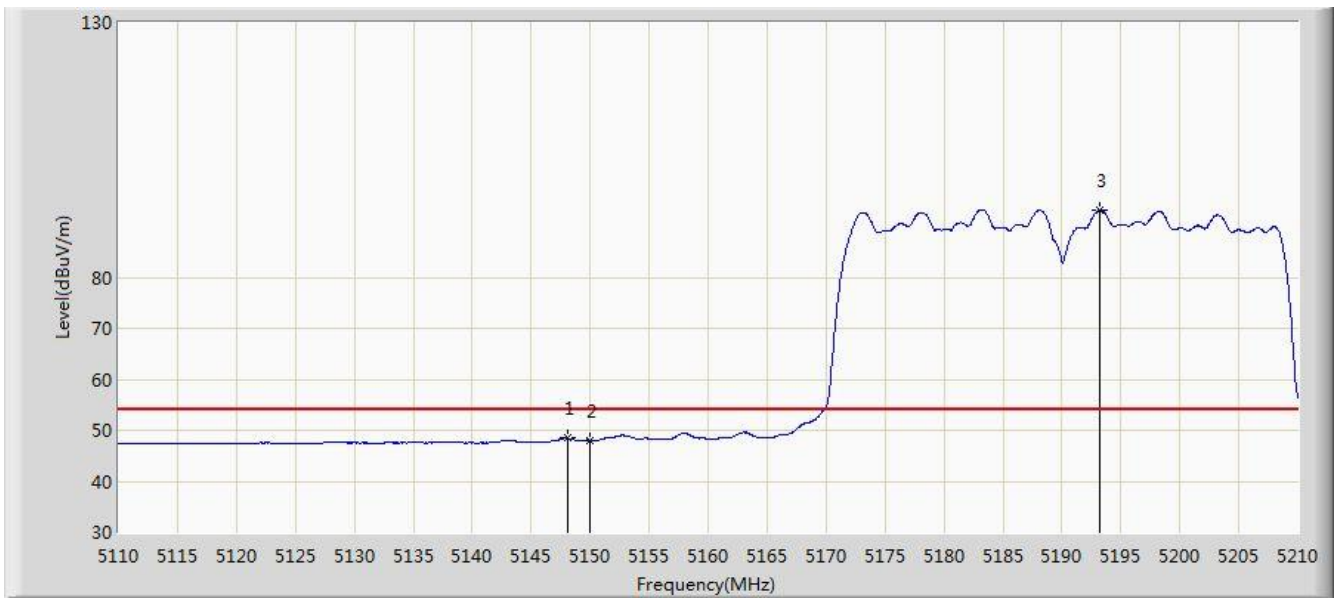


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.100	48.425	44.250	-5.575	54.000	4.175	AV
2			5150.000	48.052	43.883	-5.948	54.000	4.170	AV
3		*	5193.150	93.235	89.213	N/A	N/A	4.023	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 00:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 5310MHz (CDD Mode)	

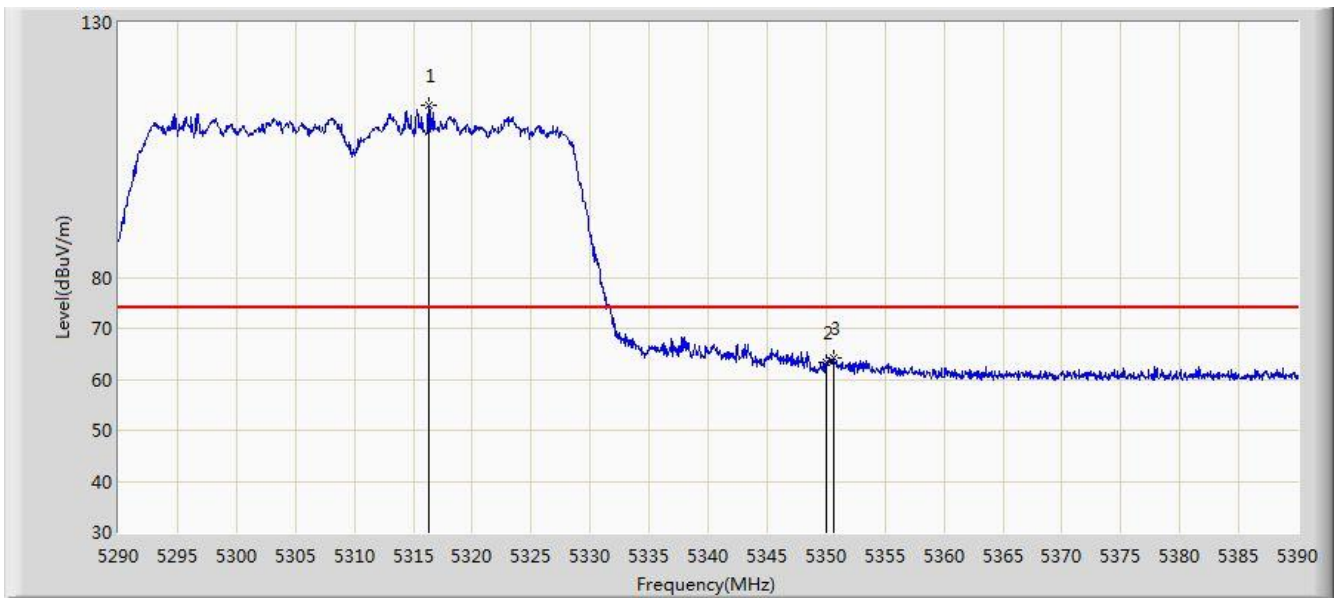


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5316.350	113.733	109.891	N/A	N/A	3.842	PK
2			5350.000	63.272	59.367	-10.728	74.000	3.904	PK
3			5350.600	64.127	60.221	-9.873	74.000	3.906	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 00:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 5310MHz (CDD Mode)	

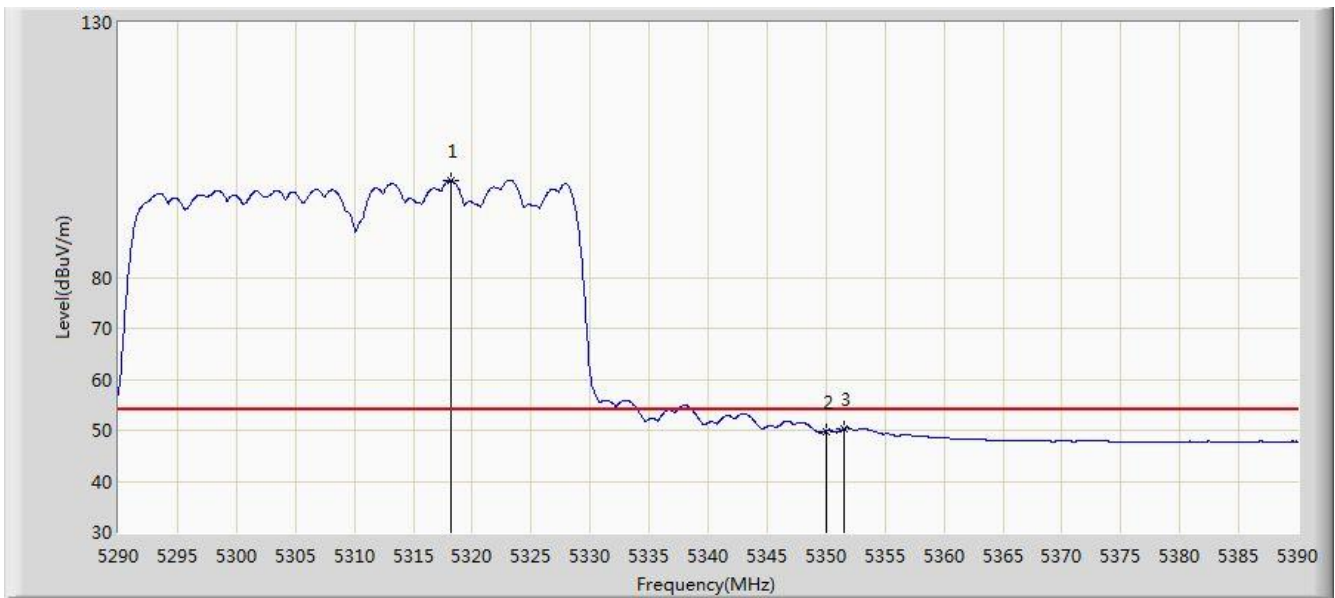


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.250	98.894	95.049	N/A	N/A	3.844	AV
2			5350.000	49.835	45.930	-4.165	54.000	3.904	AV
3			5351.550	50.387	46.479	-3.613	54.000	3.908	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 00:09
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 5310MHz (CDD Mode)	

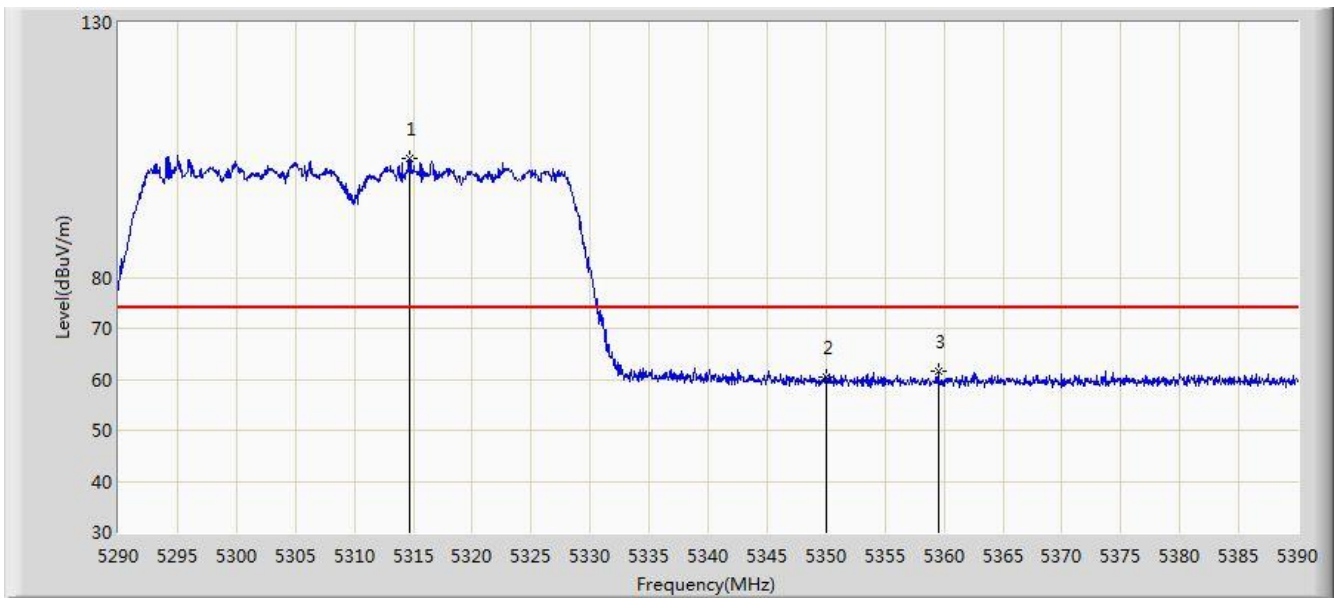


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.700	103.460	99.621	N/A	N/A	3.838	PK
2			5350.000	60.303	56.398	-13.697	74.000	3.904	PK
3			5359.500	61.679	57.757	-12.321	74.000	3.921	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 00:11
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 5310MHz (CDD Mode)	

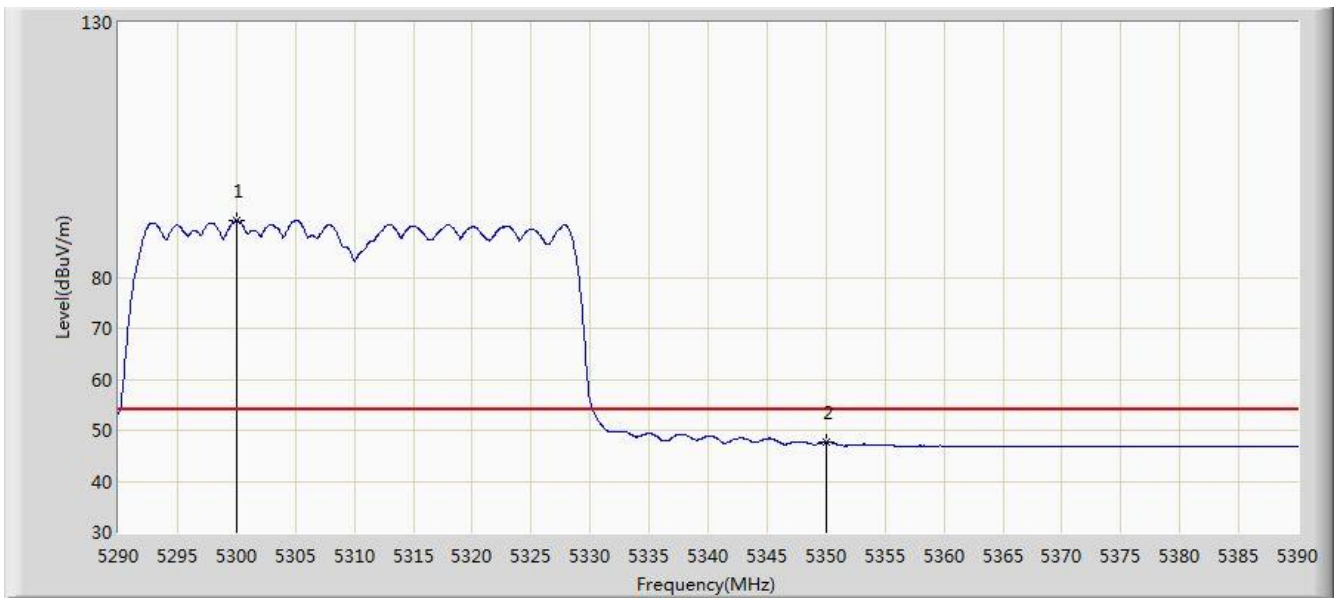


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5300.050	91.071	87.258	N/A	N/A	3.814	AV
2			5350.000	47.689	43.784	-6.311	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 00:13
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 5510MHz (CDD Mode)	

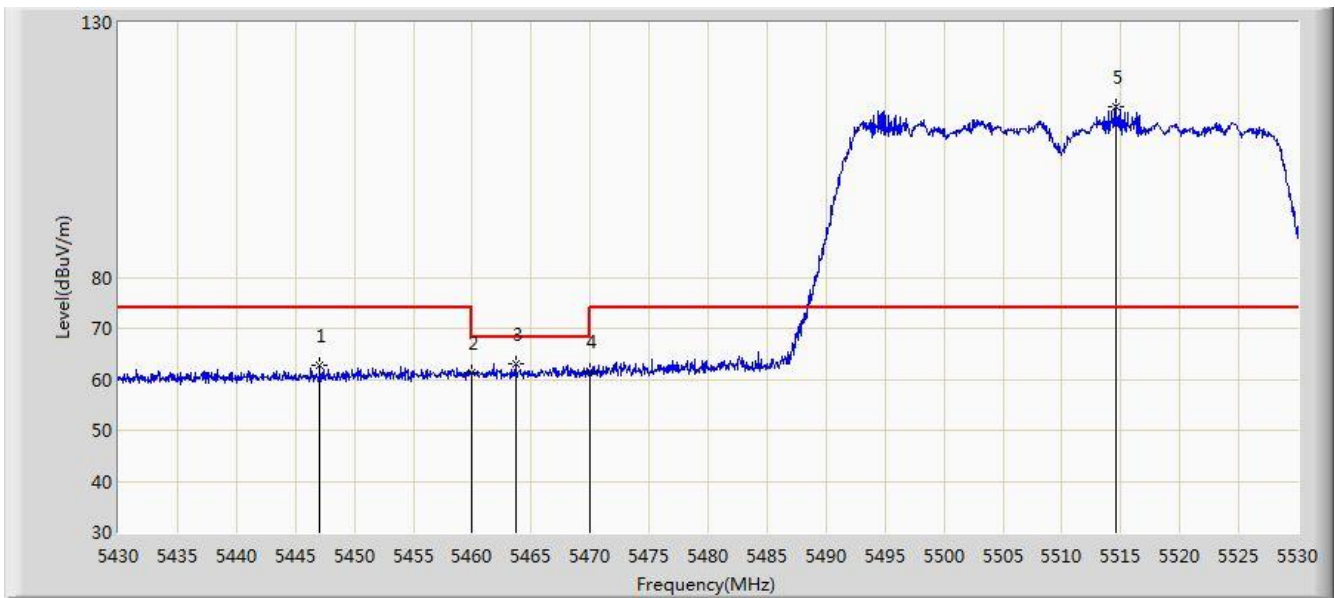


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5447.050	62.738	58.593	-11.262	74.000	4.146	PK
2			5460.000	61.245	57.065	-12.755	74.000	4.180	PK
3			5463.650	63.074	58.886	-5.126	68.200	4.188	PK
4			5470.000	61.529	57.327	-6.671	68.200	4.202	PK
5		*	5514.600	113.621	109.306	N/A	N/A	4.315	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 00:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 5510MHz (CDD Mode)	

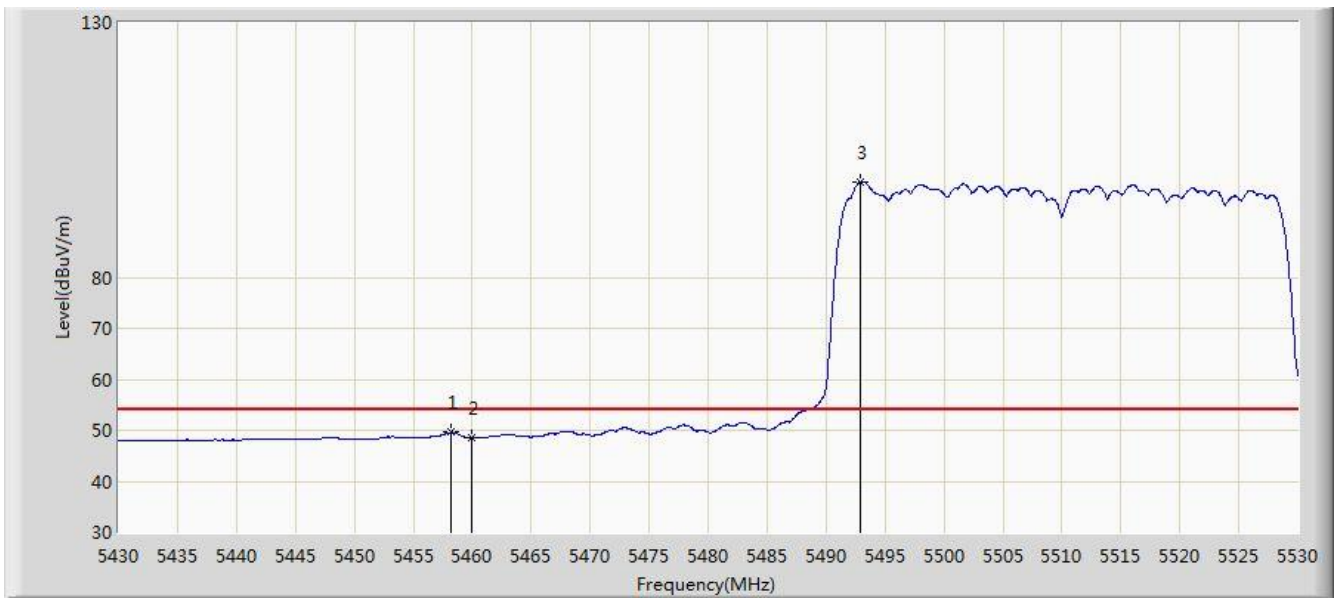


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.250	49.592	45.415	-4.408	54.000	4.177	AV
2			5460.000	48.529	44.349	-5.471	54.000	4.180	AV
3		*	5492.950	98.792	94.537	N/A	N/A	4.254	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 00:22
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 5510MHz (CDD Mode)	

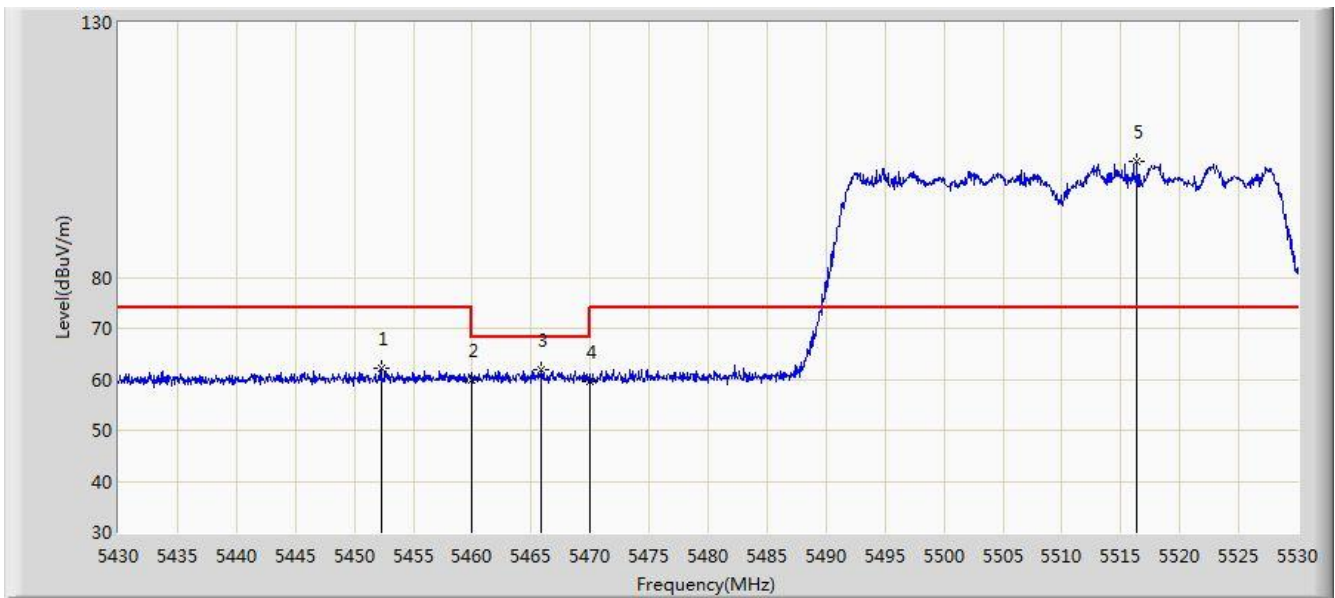


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.250	62.196	58.034	-11.804	74.000	4.162	PK
2			5460.000	59.744	55.564	-14.256	74.000	4.180	PK
3			5465.800	61.972	57.779	-6.228	68.200	4.193	PK
4			5470.000	59.577	55.375	-8.623	68.200	4.202	PK
5		*	5516.400	102.694	98.374	N/A	N/A	4.320	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 00:24
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 5510MHz (CDD Mode)	

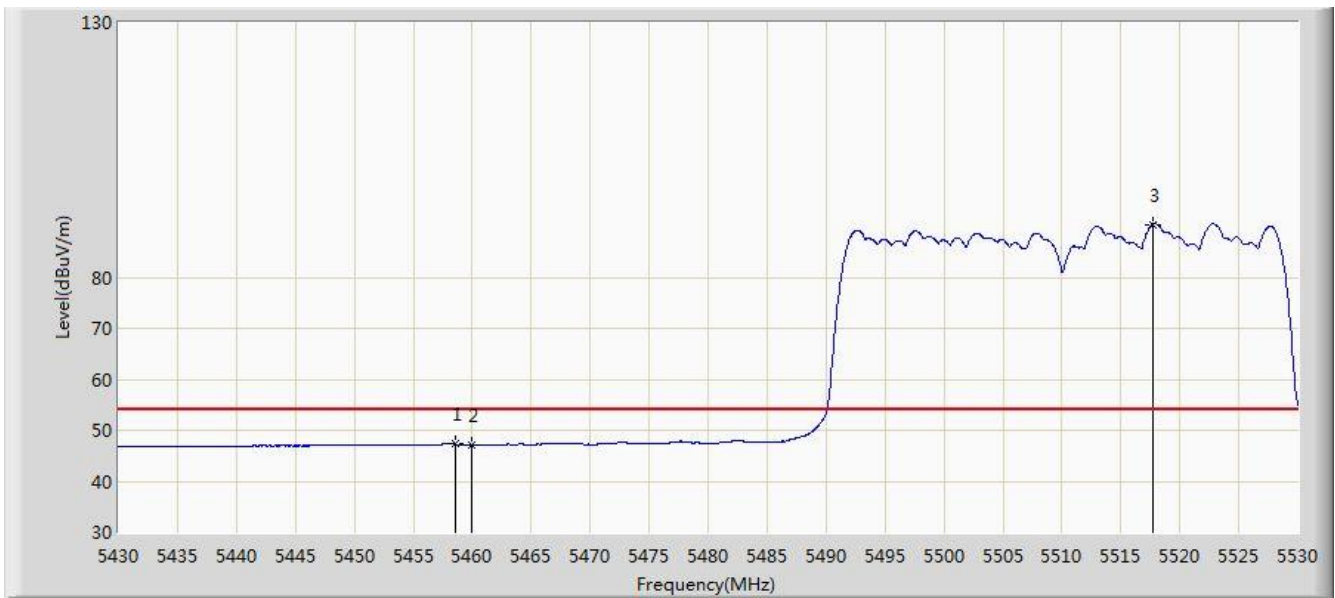


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.550	47.254	43.077	-6.746	54.000	4.178	AV
2			5460.000	47.179	42.999	-6.821	54.000	4.180	AV
3		*	5517.700	90.417	86.093	N/A	N/A	4.324	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 00:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 5670MHz (CDD Mode)	

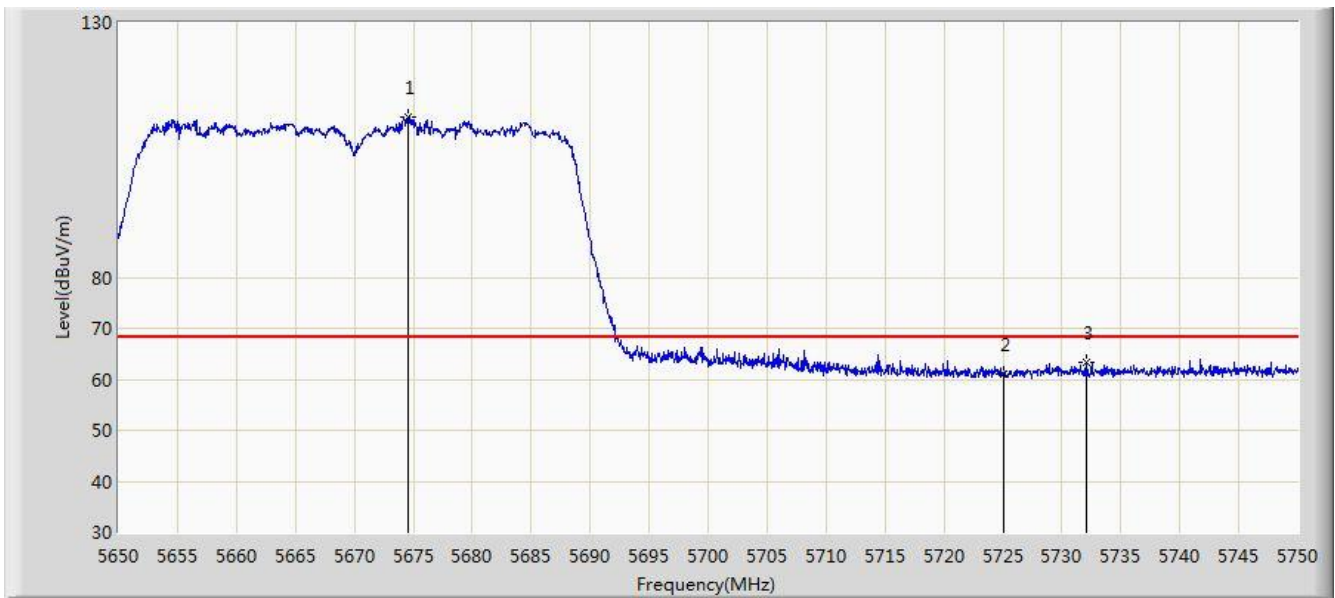


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5674.600	111.453	106.687	N/A	N/A	4.765	PK
2			5725.000	61.154	56.125	-7.046	68.200	5.029	PK
3			5732.050	63.452	58.378	-4.748	68.200	5.074	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 00:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 5670MHz (CDD Mode)	

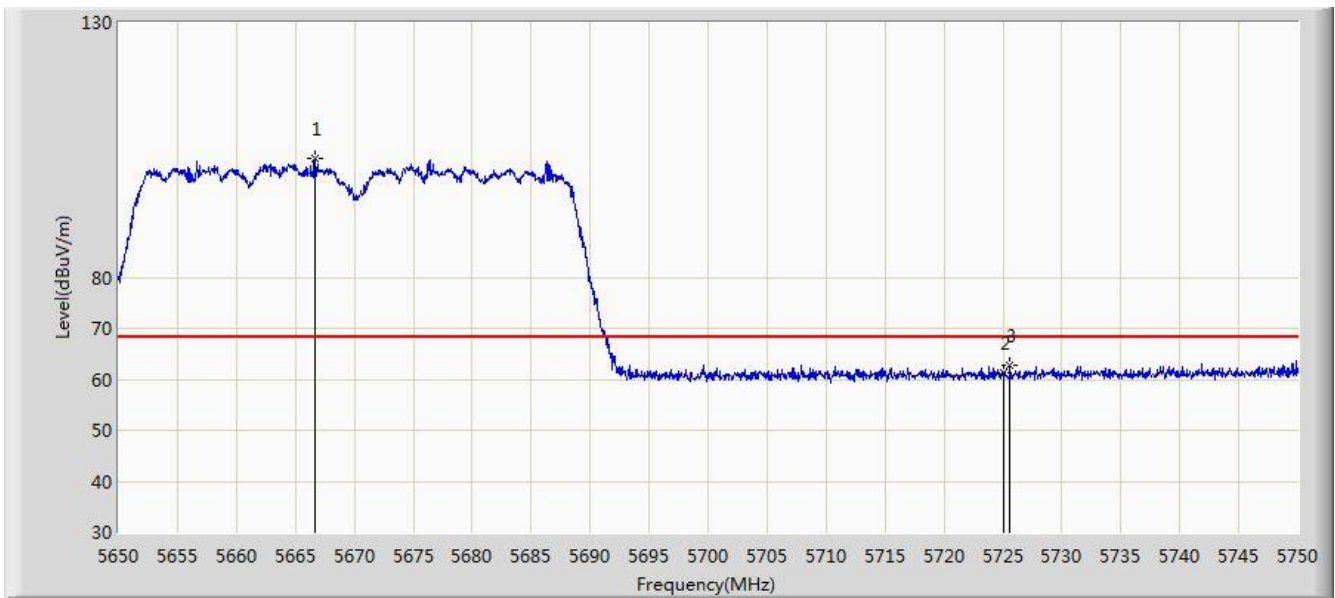


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5666.650	103.221	98.487	N/A	N/A	4.734	PK
2			5725.000	61.344	56.315	-6.856	68.200	5.029	PK
3			5725.600	62.625	57.592	-5.575	68.200	5.032	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 00:33
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 5755MHz (CDD Mode)	

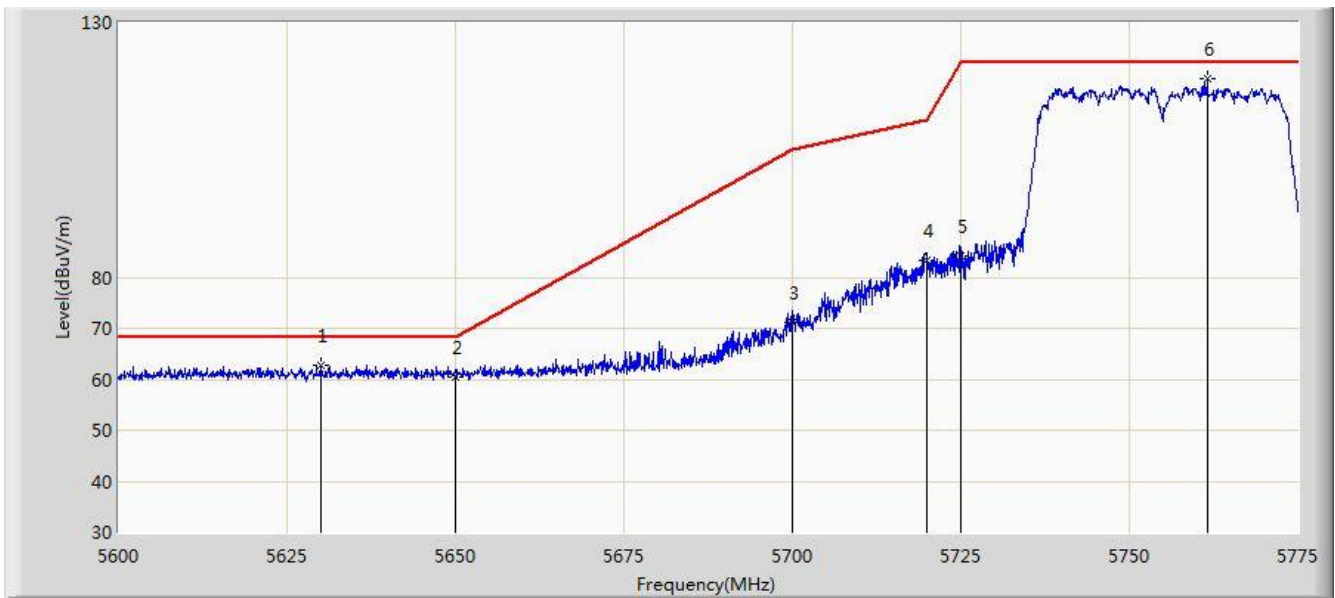


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5630.013	62.769	58.160	-5.431	68.200	4.609	PK
2			5650.000	60.453	55.782	-7.747	68.200	4.671	PK
3			5700.000	71.164	66.286	-34.036	105.200	4.878	PK
4			5720.000	83.367	78.370	-27.433	110.800	4.997	PK
5			5725.000	84.303	79.274	-37.897	122.200	5.029	PK
6		*	5761.612	119.010	113.762	N/A	N/A	5.248	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 00:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 5755MHz (CDD Mode)	

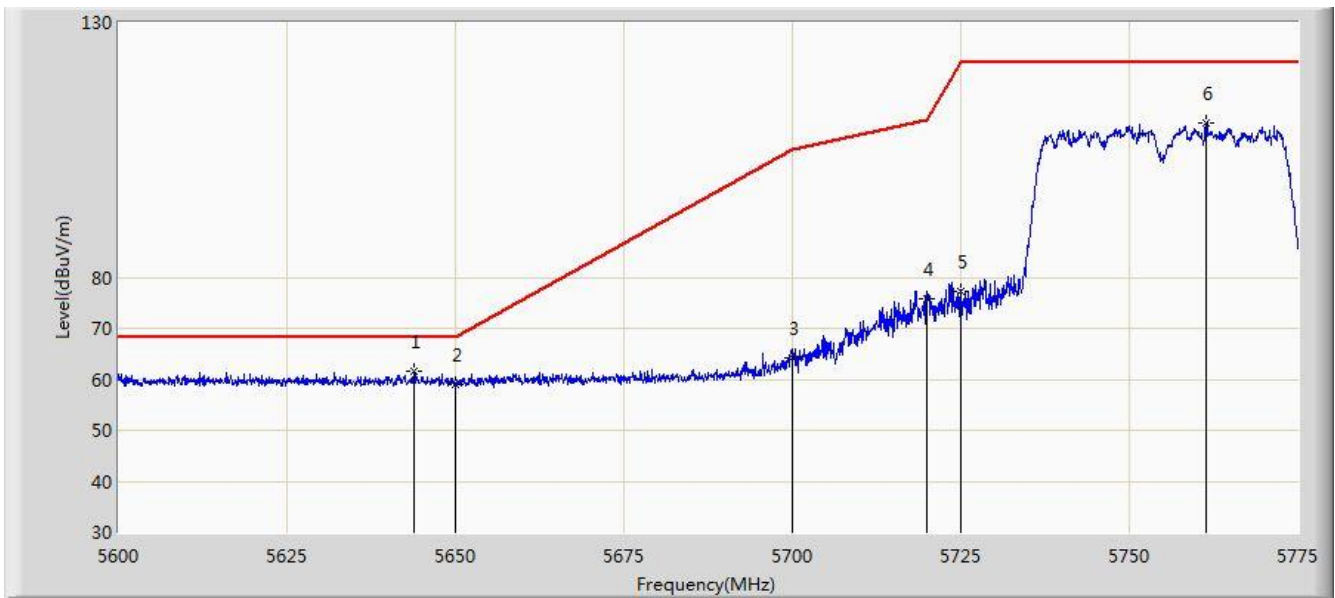


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5643.925	61.552	56.901	-6.648	68.200	4.651	PK
2			5650.000	58.866	54.195	-9.334	68.200	4.671	PK
3			5700.000	64.305	59.427	-40.895	105.200	4.878	PK
4			5720.000	75.850	70.853	-34.950	110.800	4.997	PK
5			5725.000	77.275	72.246	-44.925	122.200	5.029	PK
6			5761.437	110.380	105.133	N/A	N/A	5.247	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 00:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 5795MHz (CDD Mode)	

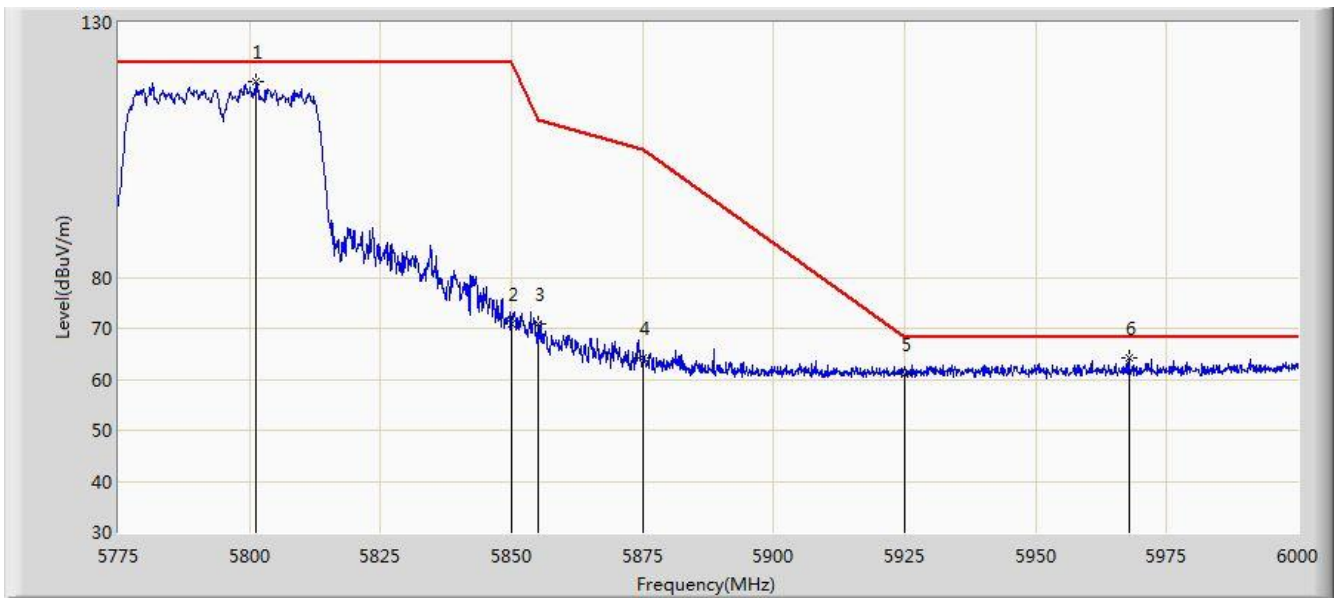


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5801.325	118.524	113.072	N/A	N/A	5.452	PK
2			5850.000	70.740	65.014	-51.460	122.200	5.726	PK
3			5855.000	70.812	65.066	-39.988	110.800	5.746	PK
4			5875.000	64.186	58.366	-41.014	105.200	5.820	PK
5			5925.000	60.919	54.953	-7.281	68.200	5.967	PK
6			5967.825	64.254	58.197	-3.946	68.200	6.057	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 00:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT40 at Channel 5795MHz (CDD Mode)	

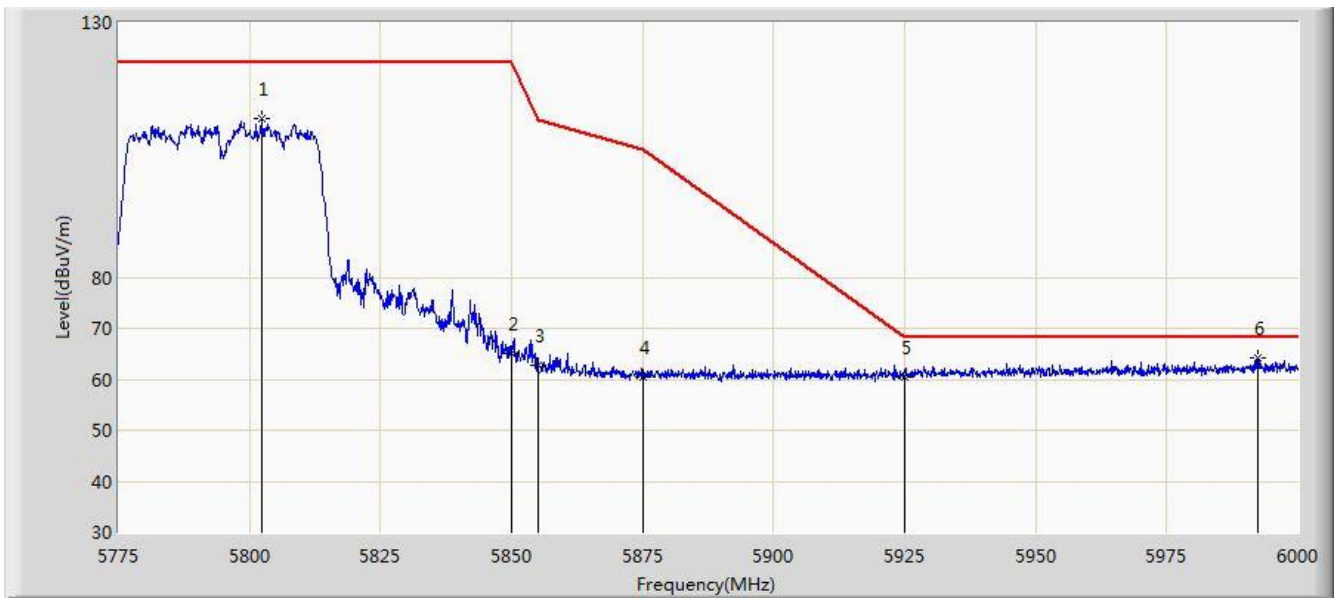


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5802.450	111.032	105.573	N/A	N/A	5.458	PK
2			5850.000	65.046	59.320	-57.154	122.200	5.726	PK
3			5855.000	62.858	57.112	-47.942	110.800	5.746	PK
4			5875.000	60.363	54.543	-44.837	105.200	5.820	PK
5			5925.000	60.575	54.609	-7.625	68.200	5.967	PK
6		*	5992.462	64.270	58.172	-3.930	68.200	6.098	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 00:43
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT80 at Channel 5210MHz (CDD Mode)	

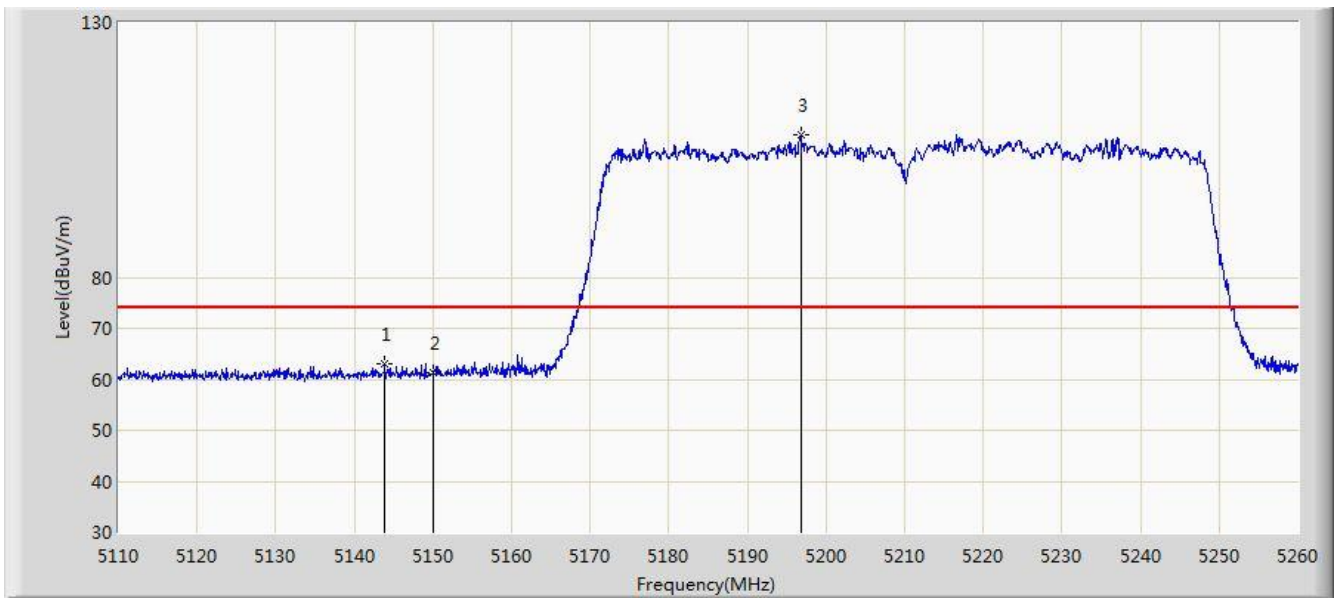


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5143.825	62.920	58.744	-11.080	74.000	4.176	PK
2			5150.000	61.305	57.136	-12.695	74.000	4.170	PK
3		*	5196.775	107.995	103.986	N/A	N/A	4.010	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 00:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT80 at Channel 5210MHz (CDD Mode)	

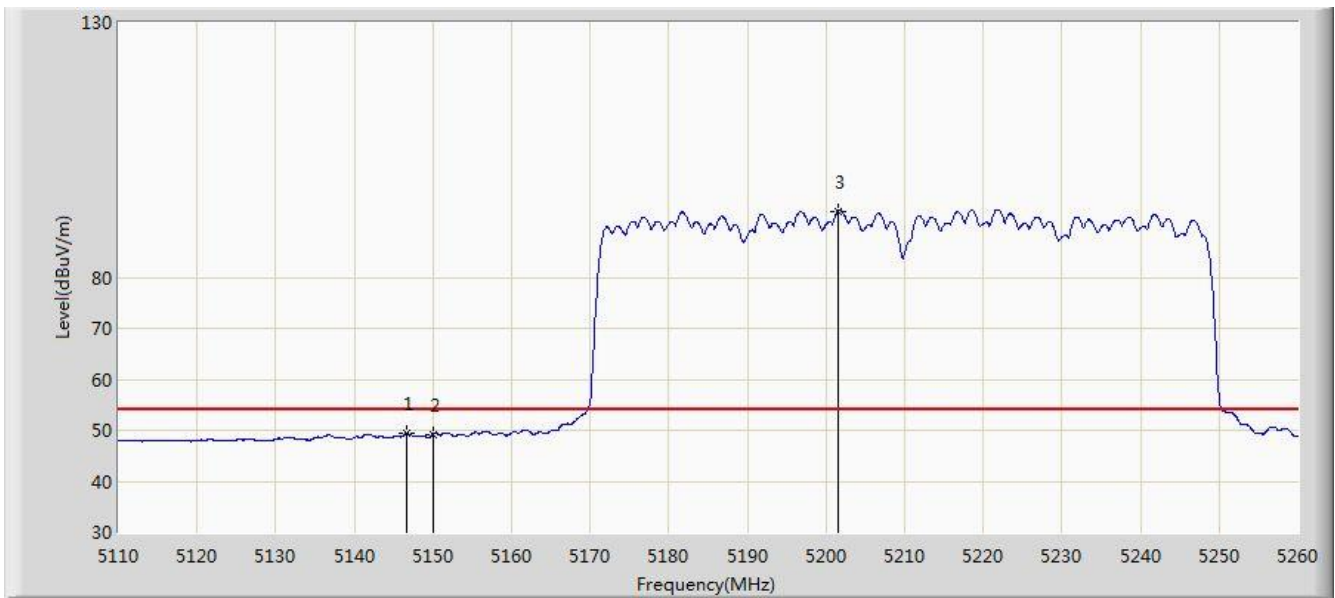


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.675	49.333	45.157	-4.667	54.000	4.176	AV
2			5150.000	49.155	44.986	-4.845	54.000	4.170	AV
3		*	5201.500	92.943	88.949	N/A	N/A	3.994	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 00:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT80 at Channel 5210MHz (CDD Mode)	

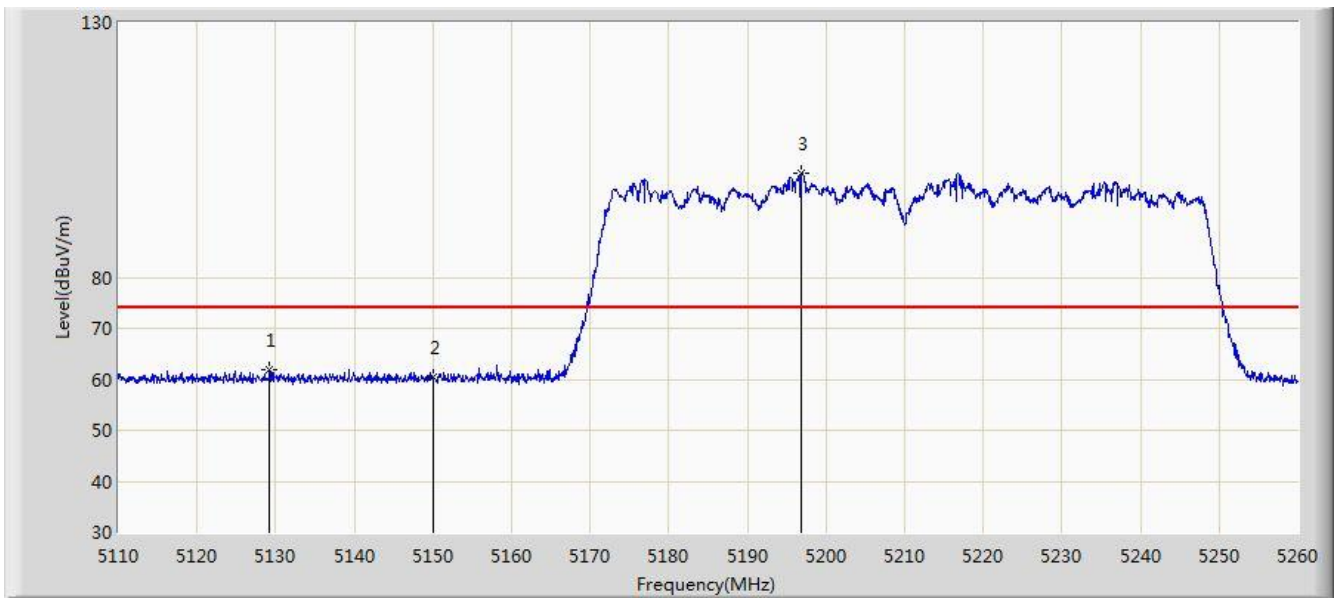


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5129.200	61.850	57.675	-12.150	74.000	4.174	PK
2			5150.000	60.507	56.338	-13.493	74.000	4.170	PK
3		*	5196.925	100.362	96.353	N/A	N/A	4.009	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 00:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT80 at Channel 5210MHz (CDD Mode)	

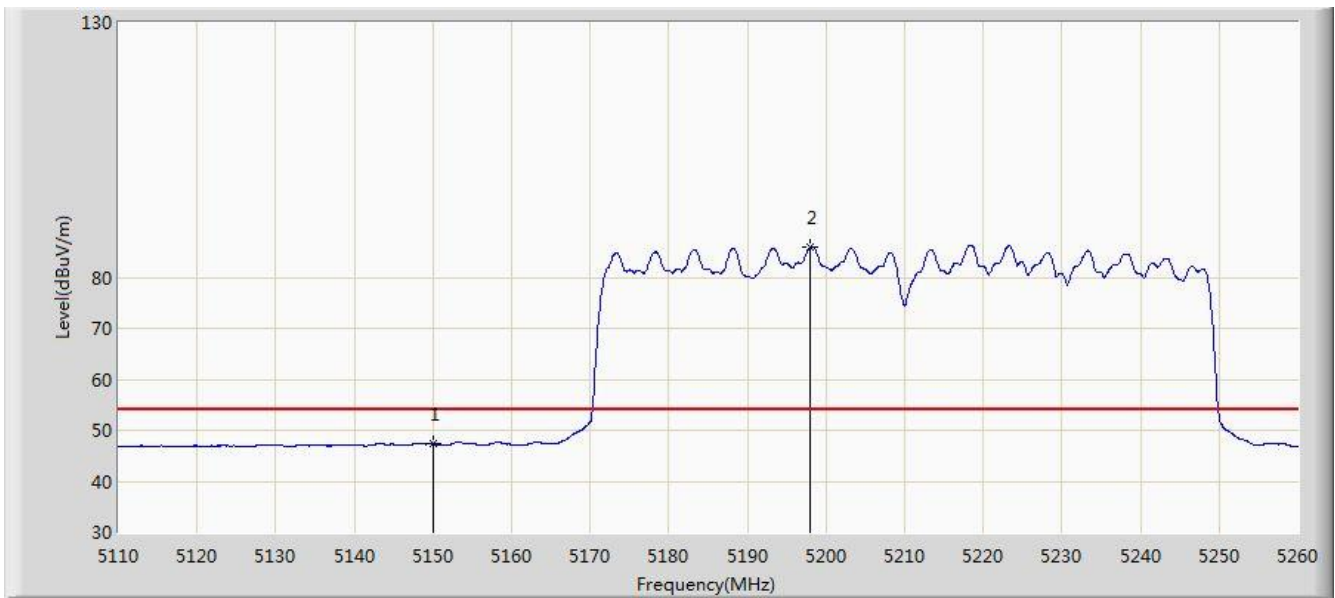


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.328	43.159	-6.672	54.000	4.170	AV
2		*	5197.975	85.815	81.810	N/A	N/A	4.005	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 00:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT80 at Channel 5290MHz (CDD Mode)	

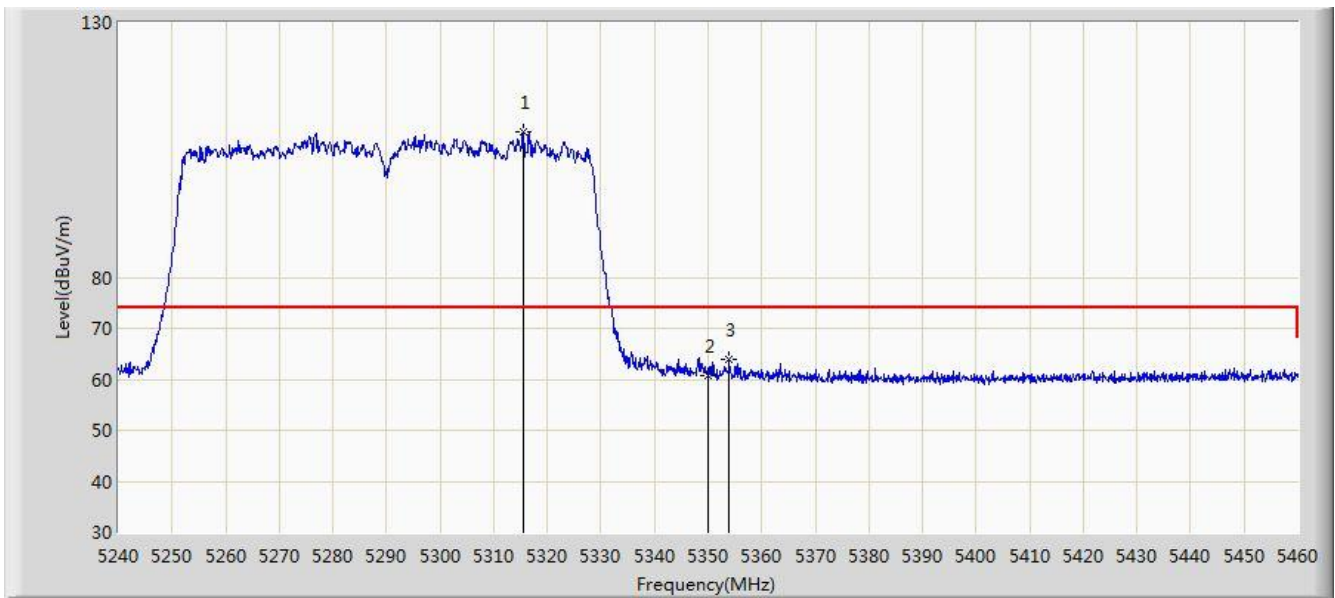


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.460	108.482	104.642	N/A	N/A	3.841	PK
2			5350.000	60.698	56.793	-13.302	74.000	3.904	PK
3			5353.960	63.870	59.958	-10.130	74.000	3.912	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 00:57
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT80 at Channel 5290MHz (CDD Mode)	

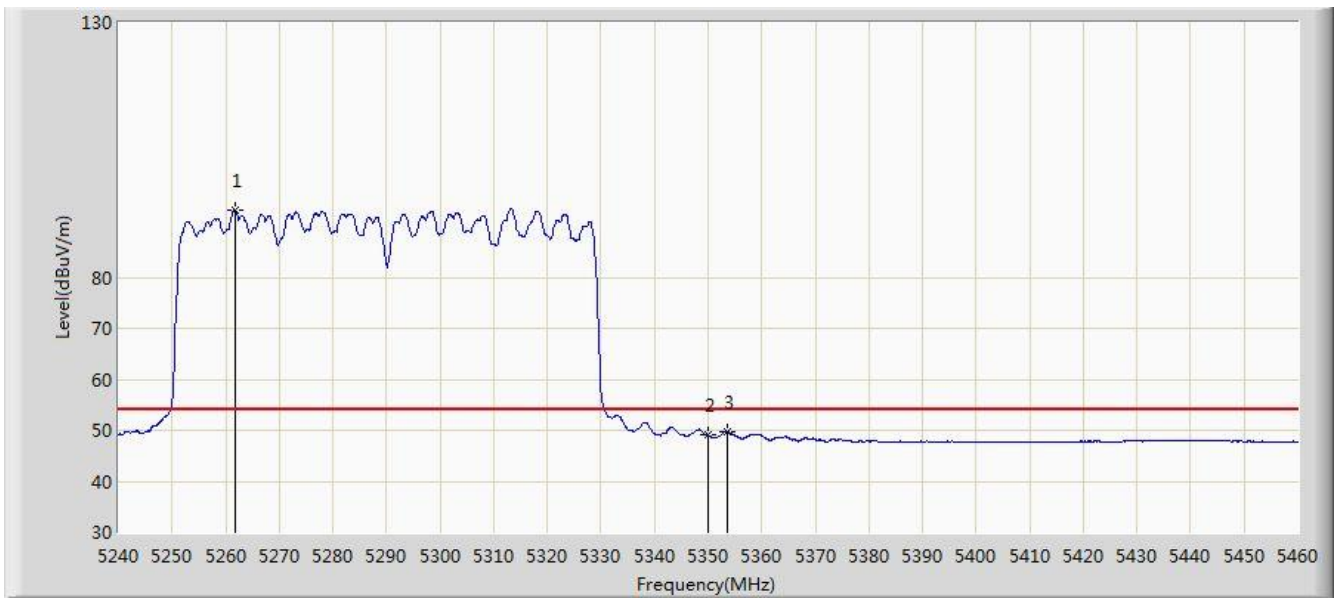


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5261.780	93.232	89.391	N/A	N/A	3.841	AV
2			5350.000	49.005	45.100	-4.995	54.000	3.904	AV
3			5353.520	49.746	45.835	-4.254	54.000	3.911	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 00:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT80 at Channel 5290MHz (CDD Mode)	

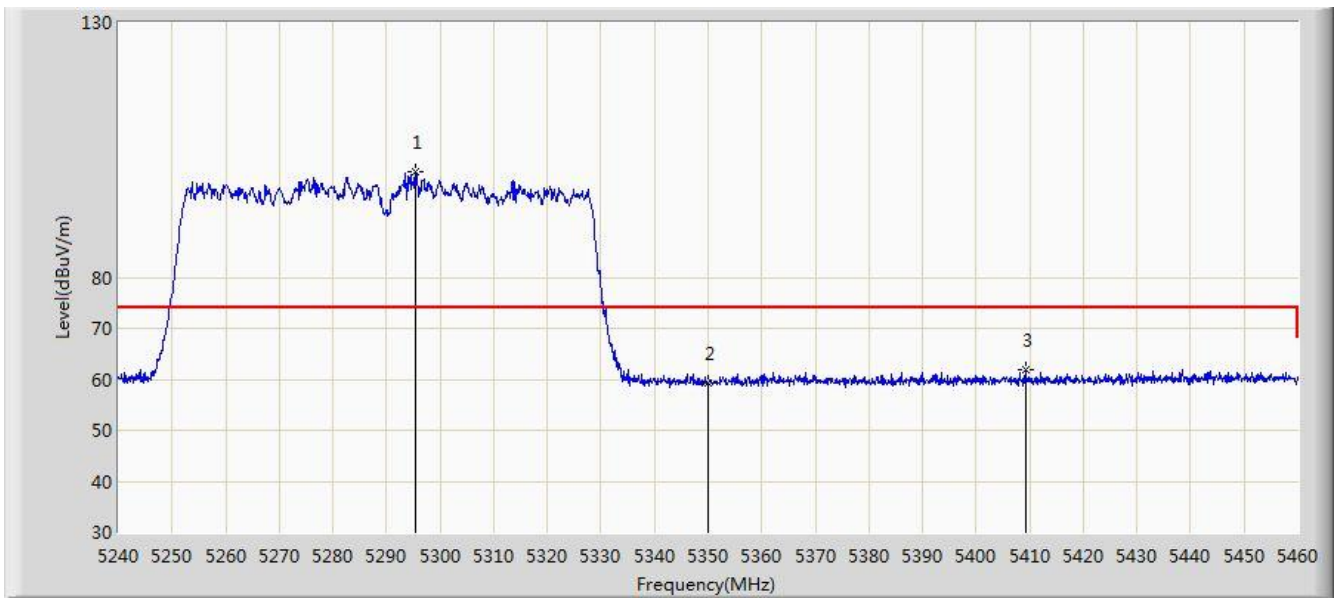


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5295.330	100.724	96.908	N/A	N/A	3.817	PK
2			5350.000	59.390	55.485	-14.610	74.000	3.904	PK
3			5409.180	61.836	57.810	-12.164	74.000	4.026	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 01:00
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT80 at Channel 5290MHz (CDD Mode)	

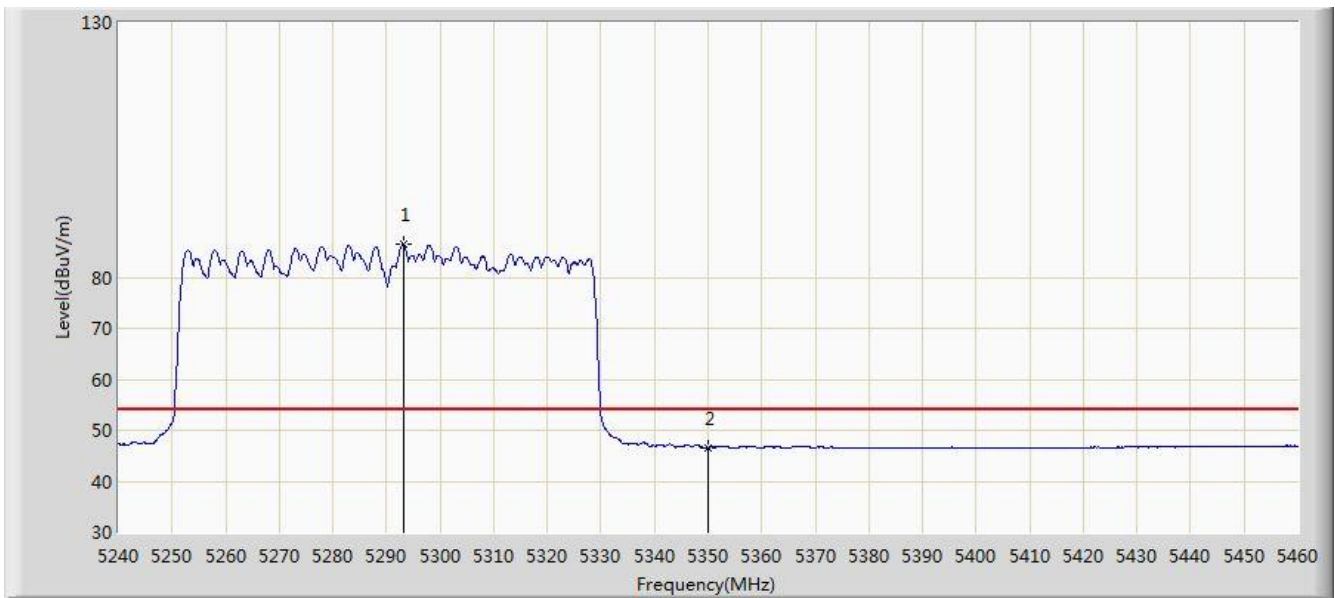


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5293.240	86.392	82.574	N/A	N/A	3.818	AV
2			5350.000	46.628	42.723	-7.372	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 10:30
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT80 at Channel 5530MHz (CDD Mode)	

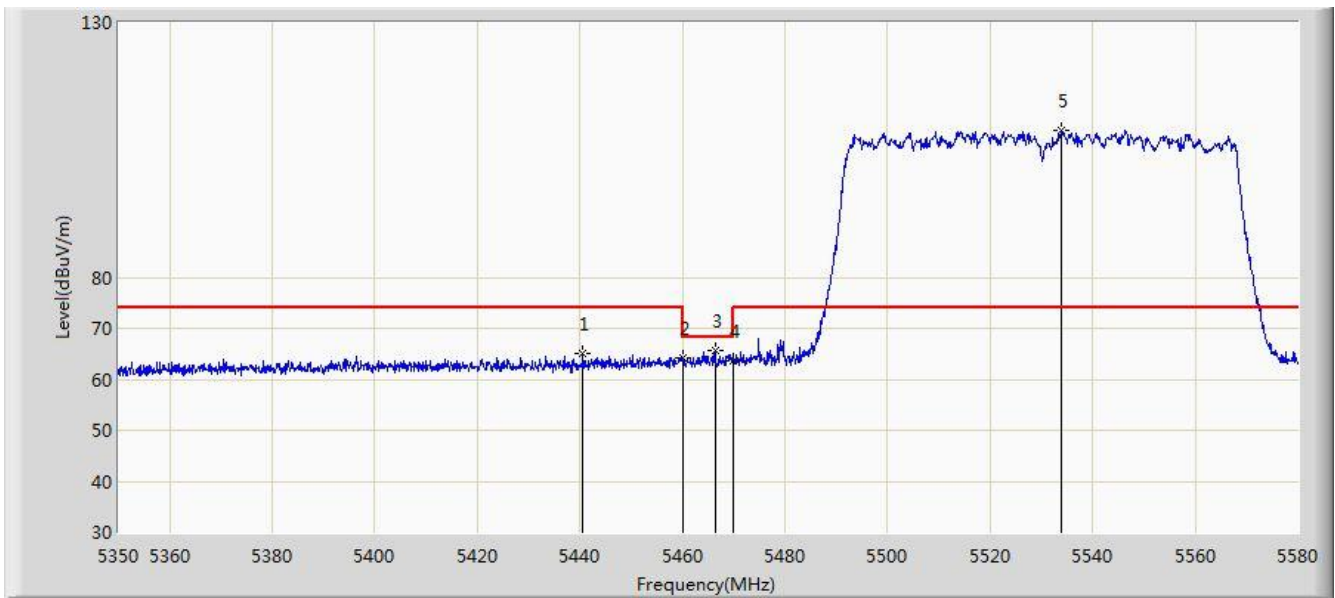


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5440.620	64.966	60.840	-9.034	74.000	4.126	PK
2			5460.000	64.218	60.038	-9.782	74.000	4.180	PK
3			5466.380	65.750	61.556	-2.450	68.200	4.194	PK
4			5470.000	63.753	59.551	-4.447	68.200	4.202	PK
5		*	5533.770	108.732	104.359	N/A	N/A	4.373	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 10:37
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT80 at Channel 5530MHz (CDD Mode)	

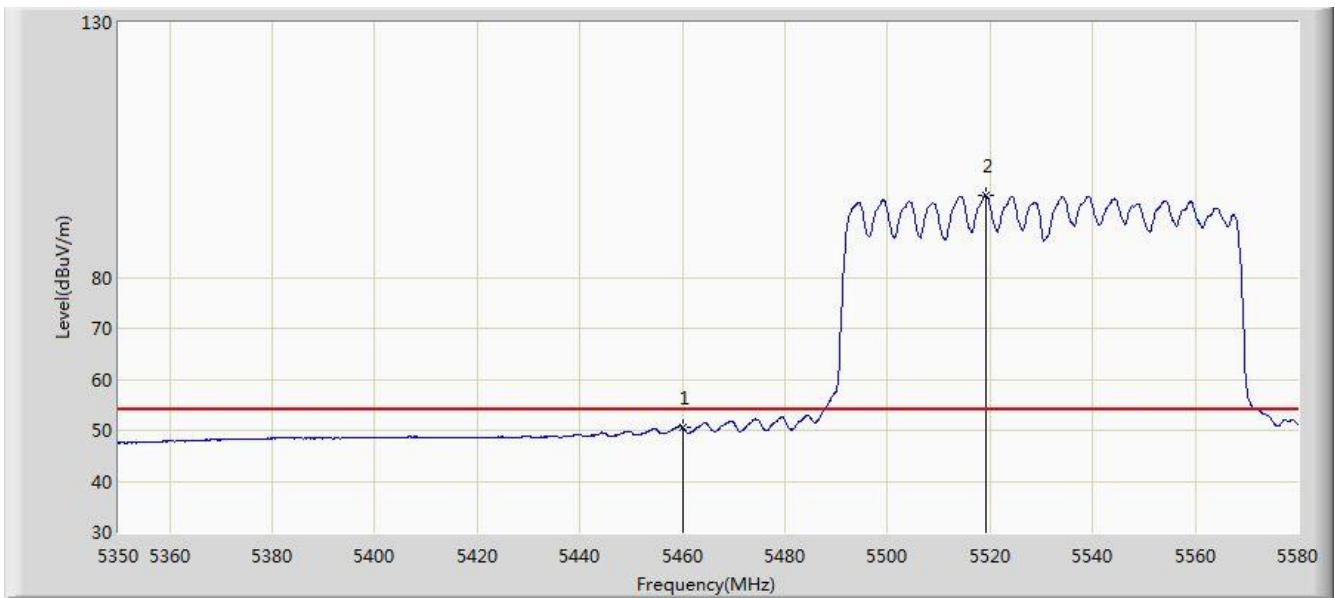


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.673	46.493	-3.327	54.000	4.180	AV
2		*	5519.050	96.106	91.778	N/A	N/A	4.328	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 10:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT80 at Channel 5530MHz (CDD Mode)	

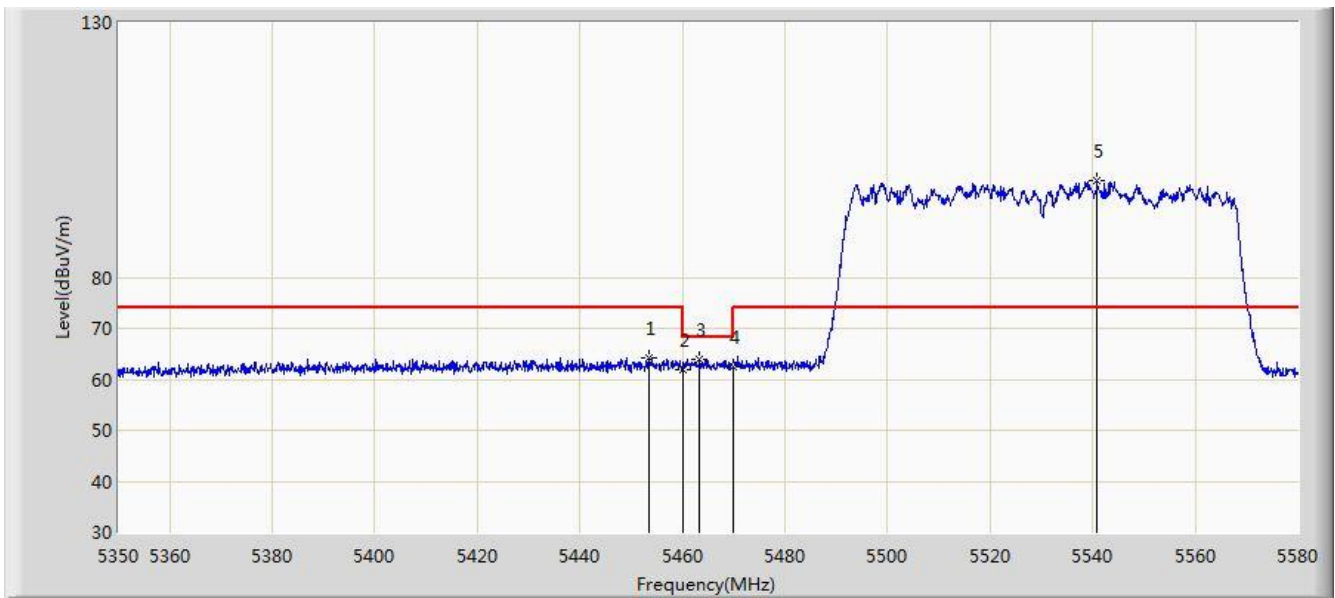


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.615	64.155	59.989	-9.845	74.000	4.166	PK
2			5460.000	61.946	57.766	-12.054	74.000	4.180	PK
3			5463.275	63.891	59.704	-4.309	68.200	4.187	PK
4			5470.000	62.536	58.334	-5.664	68.200	4.202	PK
5		*	5540.785	98.947	94.554	N/A	N/A	4.393	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 10:41
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT80 at Channel 5530MHz (CDD Mode)	

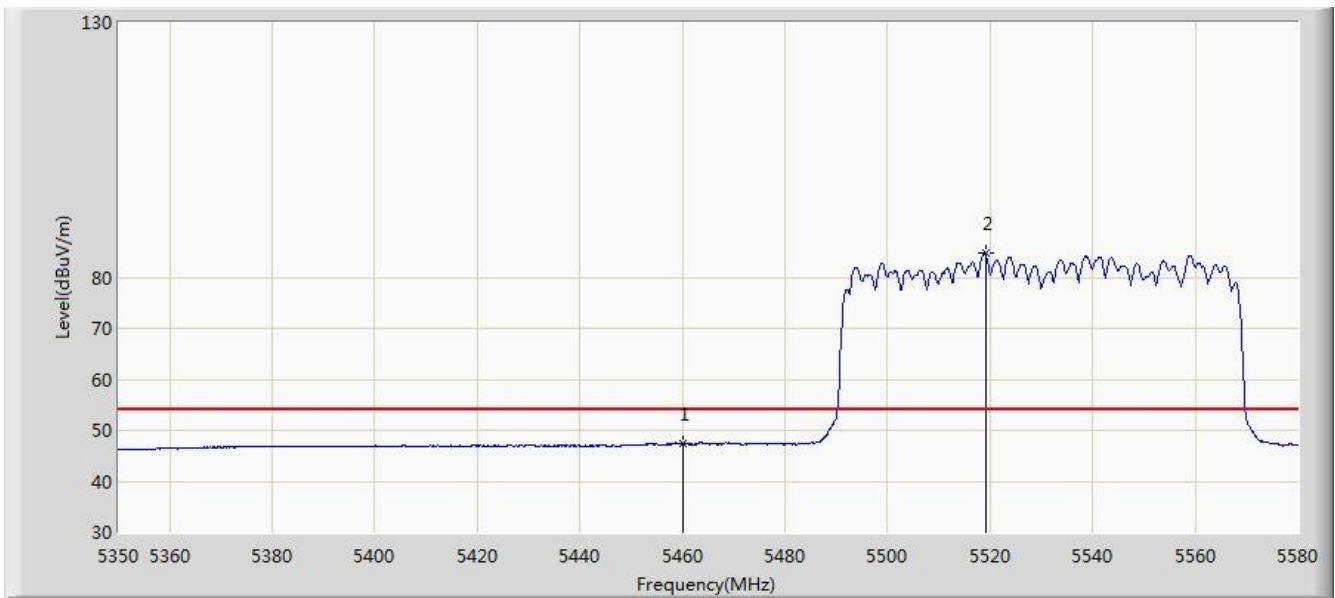


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.338	43.158	-6.662	54.000	4.180	AV
2		*	5519.050	84.698	80.370	N/A	N/A	4.328	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 10:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT80 at Channel 5610MHz (CDD Mode)	

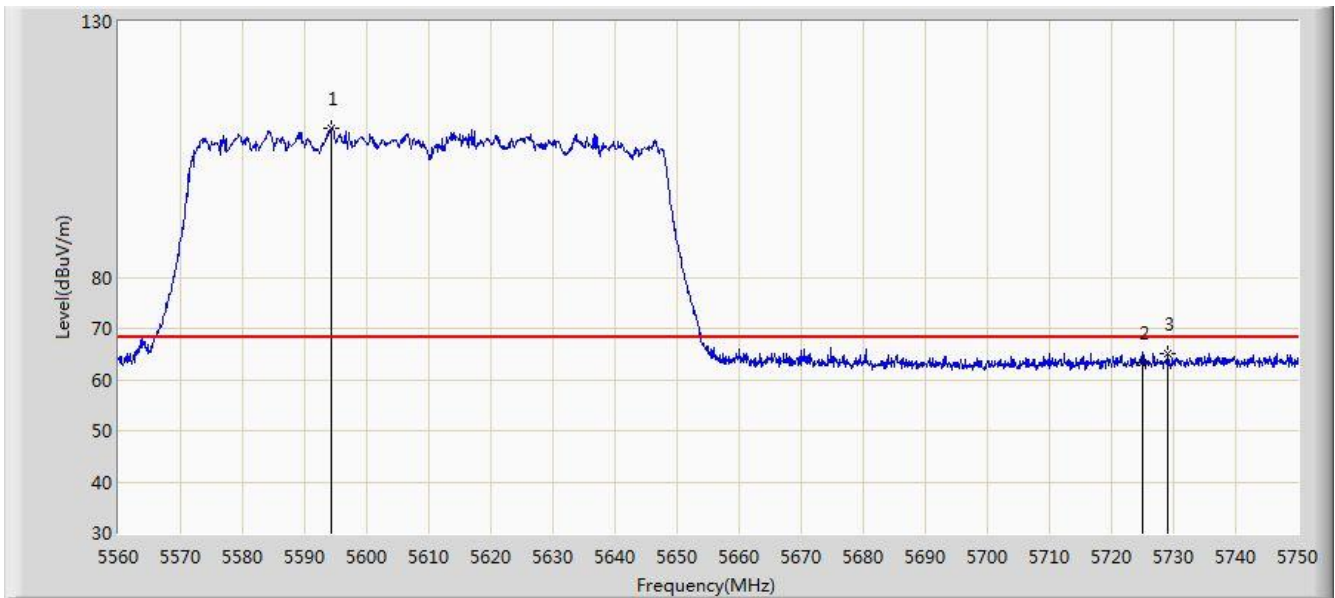


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5594.390	109.040	104.526	N/A	N/A	4.513	PK
2			5725.000	63.467	58.438	-4.733	68.200	5.029	PK
3			5729.100	65.206	60.151	-2.994	68.200	5.055	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 10:49
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT80 at Channel 5610MHz (CDD Mode)	

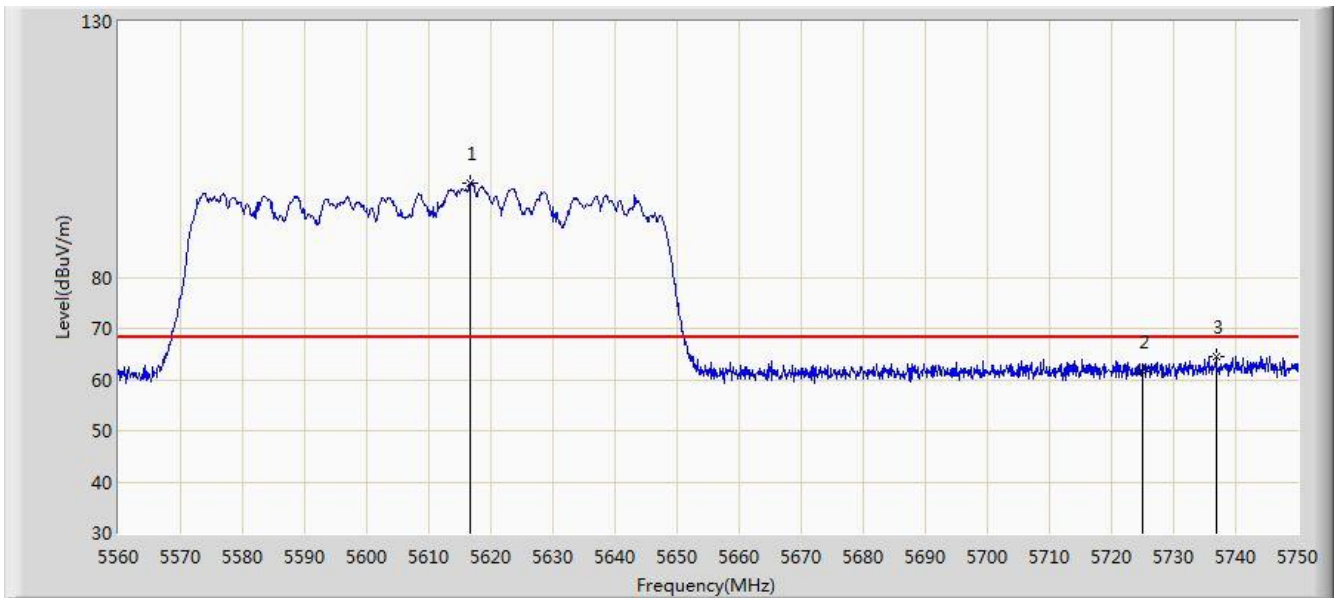


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5616.715	98.273	93.702	N/A	N/A	4.572	PK
2			5725.000	61.505	56.476	-6.695	68.200	5.029	PK
3			5736.795	64.350	59.246	-3.850	68.200	5.105	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 10:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT80 at Channel 5775MHz (CDD Mode)	

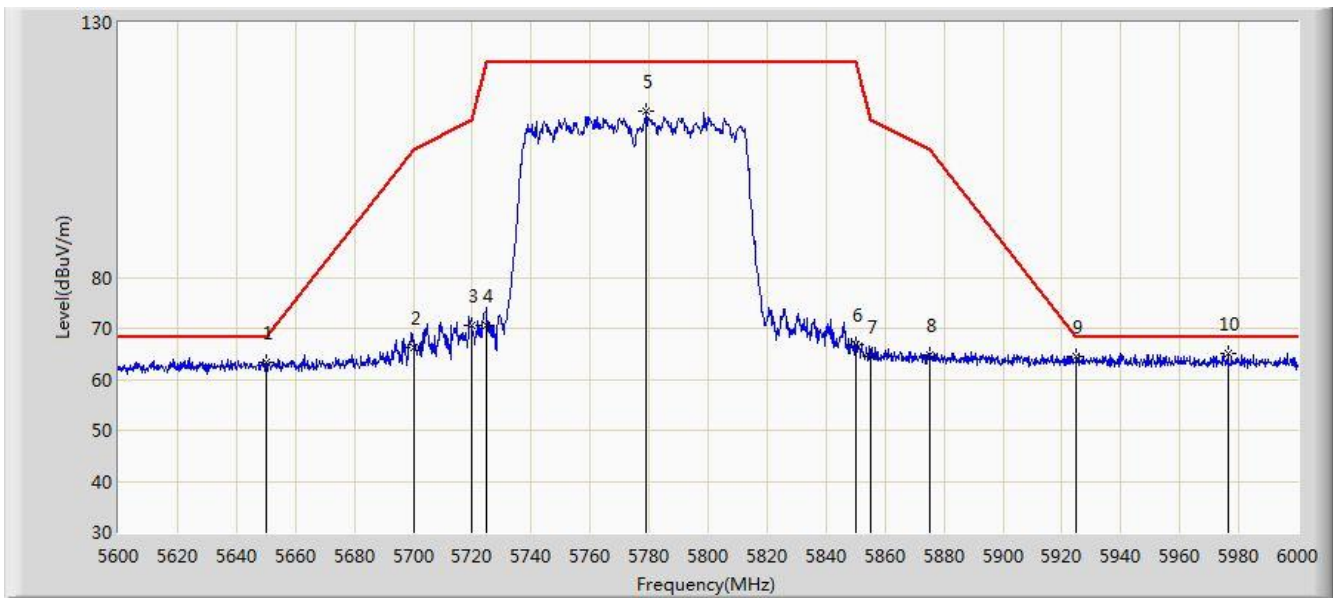


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5650.000	63.385	58.714	-4.815	68.200	4.671	PK
2			5700.000	66.104	61.226	-39.096	105.200	4.878	PK
3			5720.000	70.510	65.513	-40.290	110.800	4.997	PK
4			5725.000	70.479	65.450	-51.721	122.200	5.029	PK
5			5779.000	112.608	107.271	N/A	N/A	5.337	PK
6			5850.000	66.670	60.944	-55.530	122.200	5.726	PK
7			5855.000	64.629	58.883	-46.171	110.800	5.746	PK
8			5875.000	64.749	58.929	-40.451	105.200	5.820	PK
9			5925.000	64.375	58.409	-3.825	68.200	5.967	PK
10		*	5976.200	64.998	58.927	-3.202	68.200	6.071	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 10:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT80 at Channel 5775MHz (CDD Mode)	

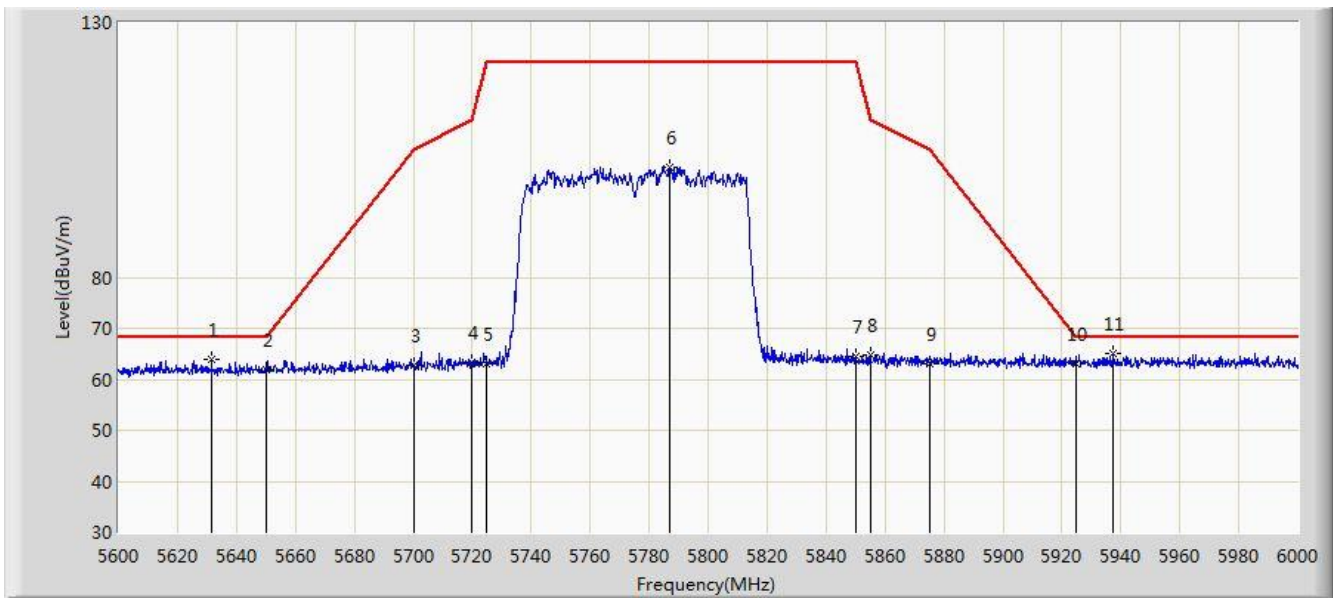


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5631.600	64.021	59.407	-4.179	68.200	4.614	PK
2			5650.000	61.784	57.113	-6.416	68.200	4.671	PK
3			5700.000	62.741	57.863	-42.459	105.200	4.878	PK
4			5720.000	63.331	58.334	-47.469	110.800	4.997	PK
5			5725.000	63.126	58.097	-59.074	122.200	5.029	PK
6			5787.000	101.615	96.238	N/A	N/A	5.377	PK
7			5850.000	64.554	58.828	-57.646	122.200	5.726	PK
8			5855.000	64.809	59.063	-45.991	110.800	5.746	PK
9			5875.000	63.114	57.294	-42.086	105.200	5.820	PK
10			5925.000	63.174	57.208	-5.026	68.200	5.967	PK
11		*	5937.200	65.029	59.032	-3.171	68.200	5.997	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 11:02
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT160 at Channel 5250MHz (CDD Mode)	

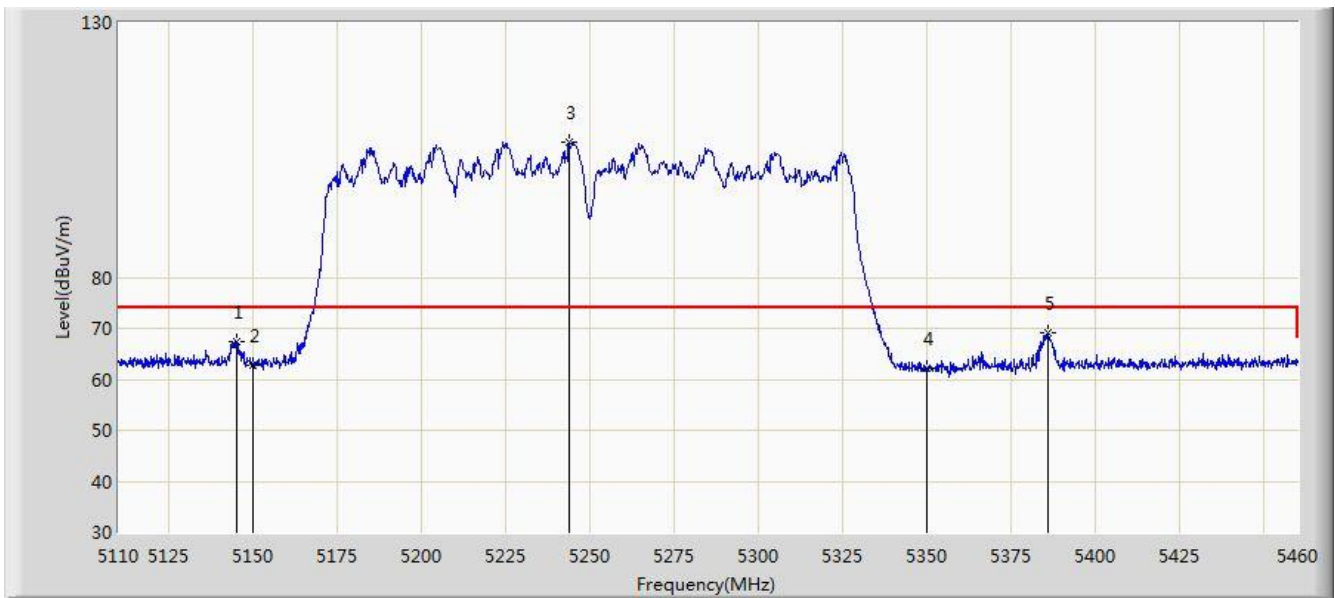


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.000	67.459	63.283	-6.541	74.000	4.175	PK
2			5150.000	62.739	58.570	-11.261	74.000	4.170	PK
3		*	5243.700	106.401	102.532	N/A	N/A	3.870	PK
4			5350.000	62.039	58.134	-11.961	74.000	3.904	PK
5			5385.800	69.227	65.257	-4.773	74.000	3.970	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 11:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT160 at Channel 5250MHz (CDD Mode)	

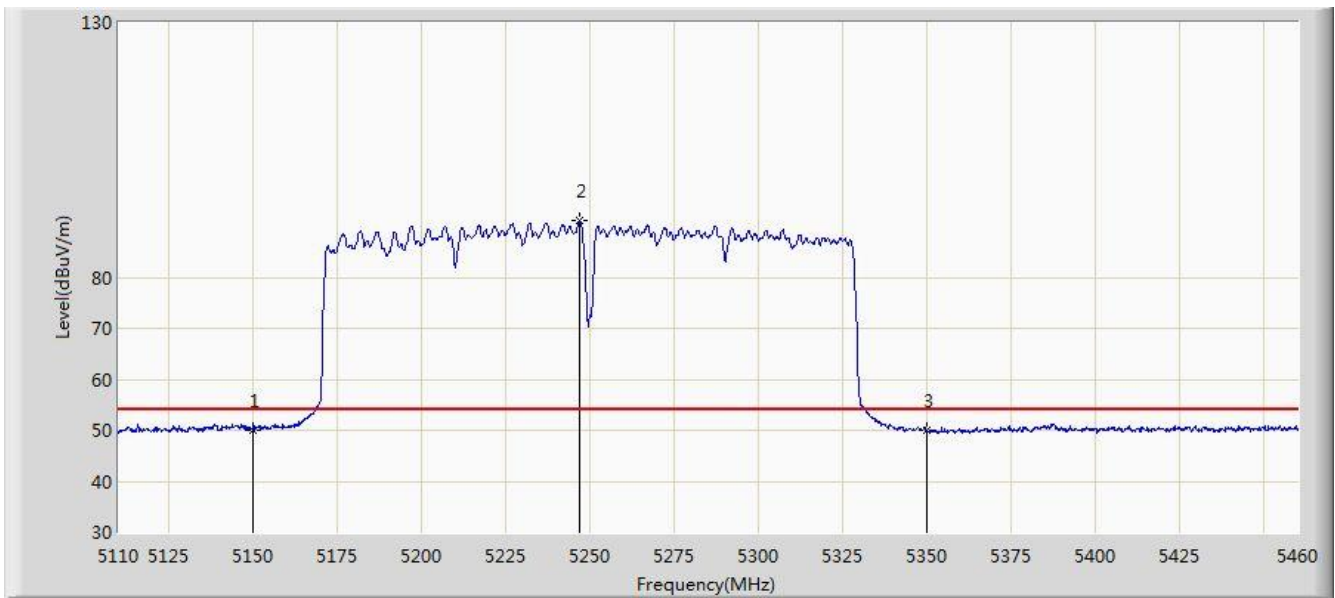


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.119	45.950	-3.881	54.000	4.170	AV
2		*	5246.850	91.056	87.196	N/A	N/A	3.859	AV
3			5350.000	49.864	45.959	-4.136	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 11:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT160 at Channel 5250MHz (CDD Mode)	

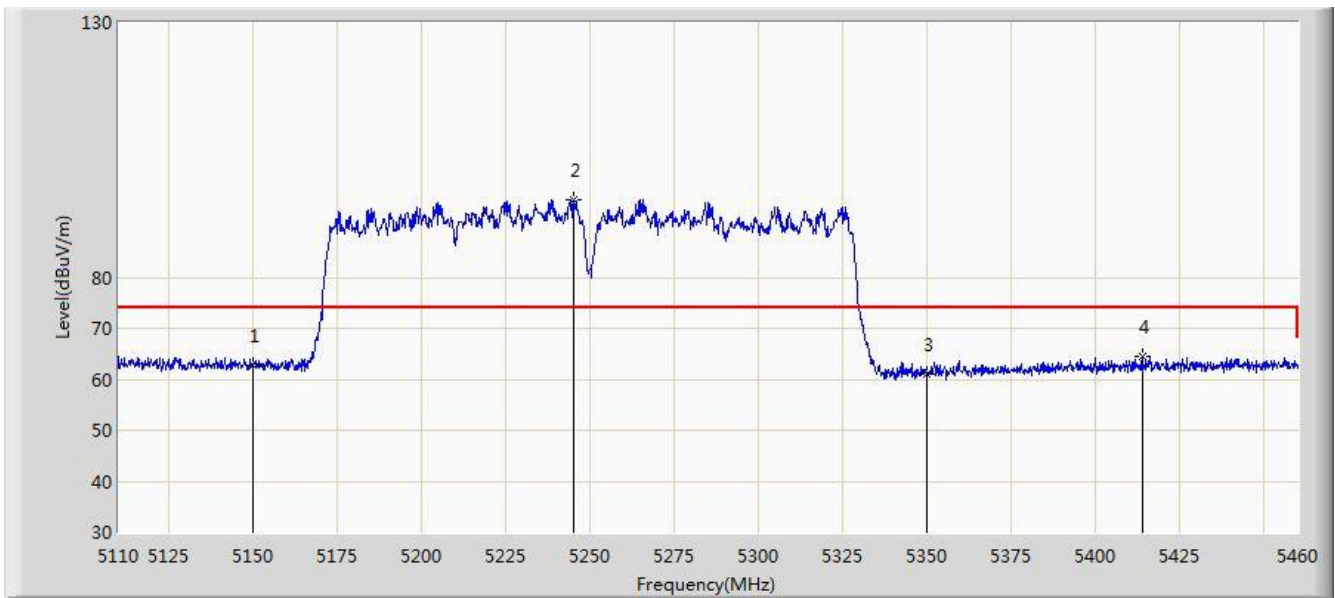


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	62.878	58.709	-11.122	74.000	4.170	PK
2		*	5244.925	95.264	91.398	N/A	N/A	3.866	PK
3			5350.000	61.145	57.240	-12.855	74.000	3.904	PK
4			5413.800	64.606	60.565	-9.394	74.000	4.040	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 11:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT160 at Channel 5250MHz (CDD Mode)	

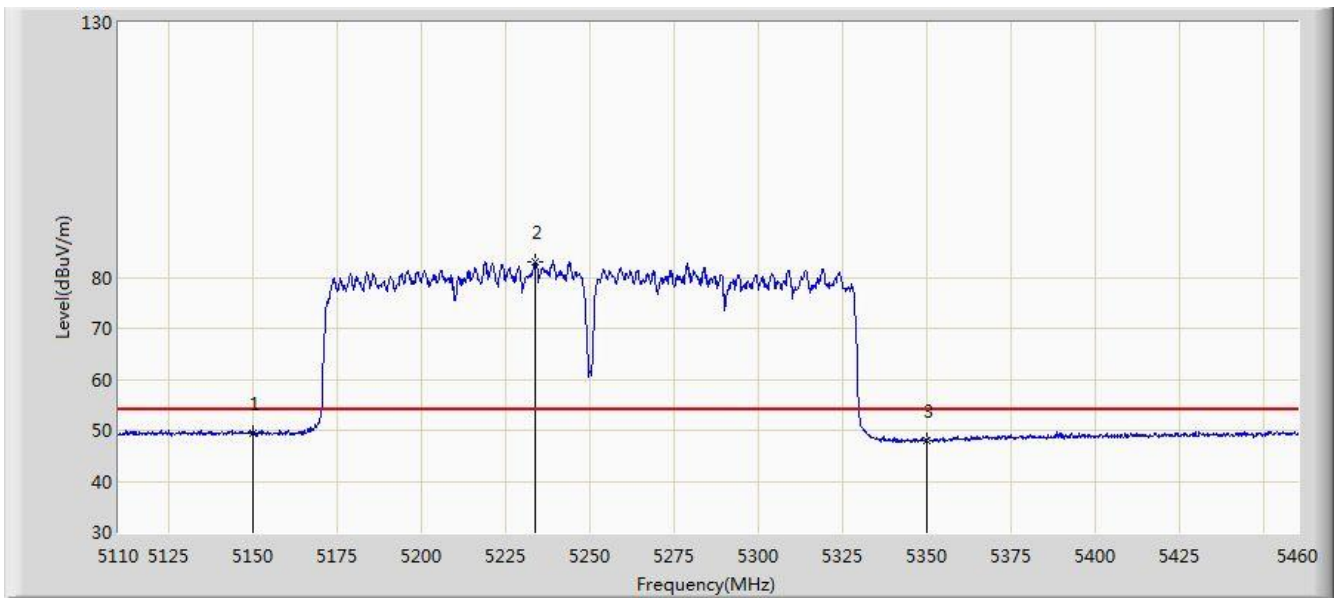


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	49.475	45.306	-4.525	54.000	4.170	AV
2		*	5233.550	83.155	79.256	N/A	N/A	3.898	AV
3			5350.000	47.906	44.001	-6.094	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 11:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT160 at Channel 5570MHz (CDD Mode)	

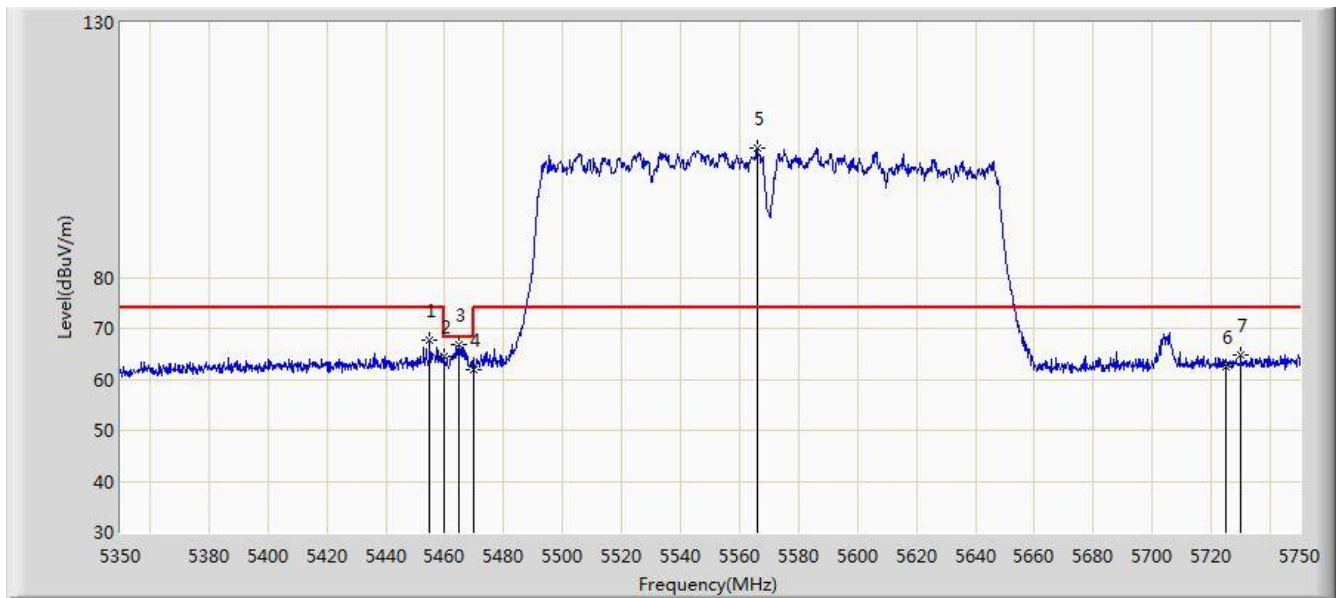


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.800	67.650	63.481	-6.350	74.000	4.170	PK
2			5460.000	64.375	60.195	-9.625	74.000	4.180	PK
3			5464.600	66.810	62.620	-1.390	68.200	4.191	PK
4			5470.000	61.930	57.728	-6.270	68.200	4.202	PK
5		*	5565.800	105.226	100.772	N/A	N/A	4.454	PK
6			5725.000	62.578	57.549	-11.422	74.000	5.029	PK
7			5730.000	64.679	59.618	-9.321	74.000	5.061	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 11:18
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT160 at Channel 5570MHz (CDD Mode)	

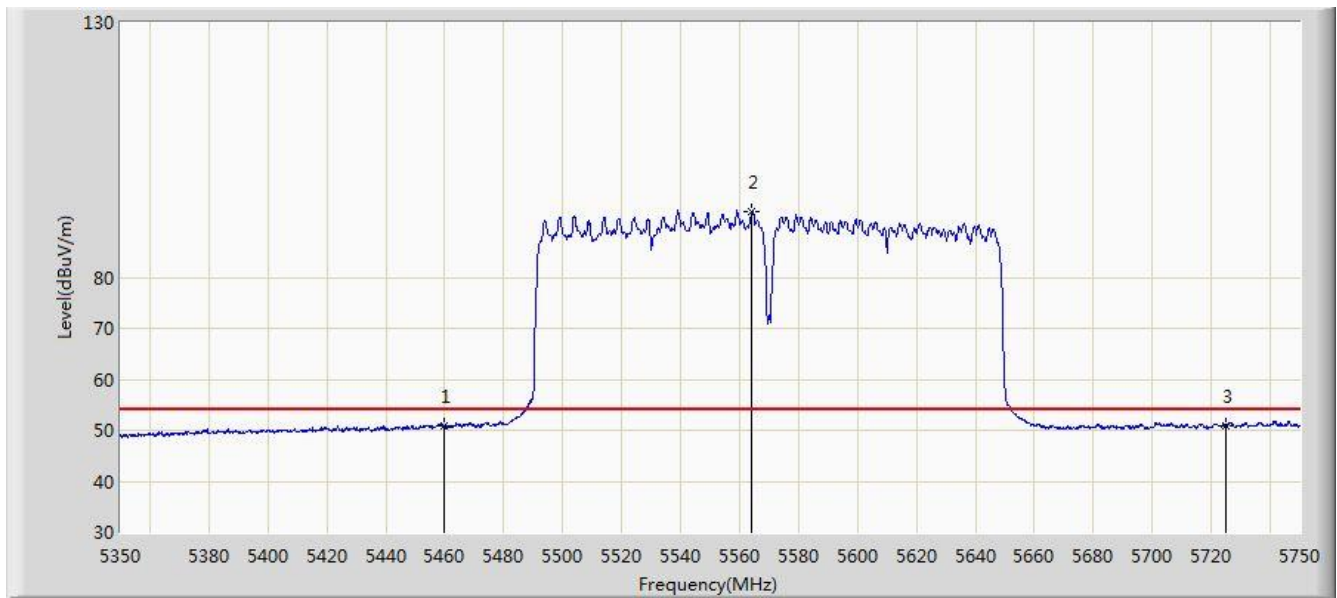


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.776	46.596	-3.224	54.000	4.180	AV
2		*	5564.200	92.922	88.472	N/A	N/A	4.450	AV
3			5725.000	50.898	45.869	-3.102	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 11:20
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT160 at Channel 5570MHz (CDD Mode)	

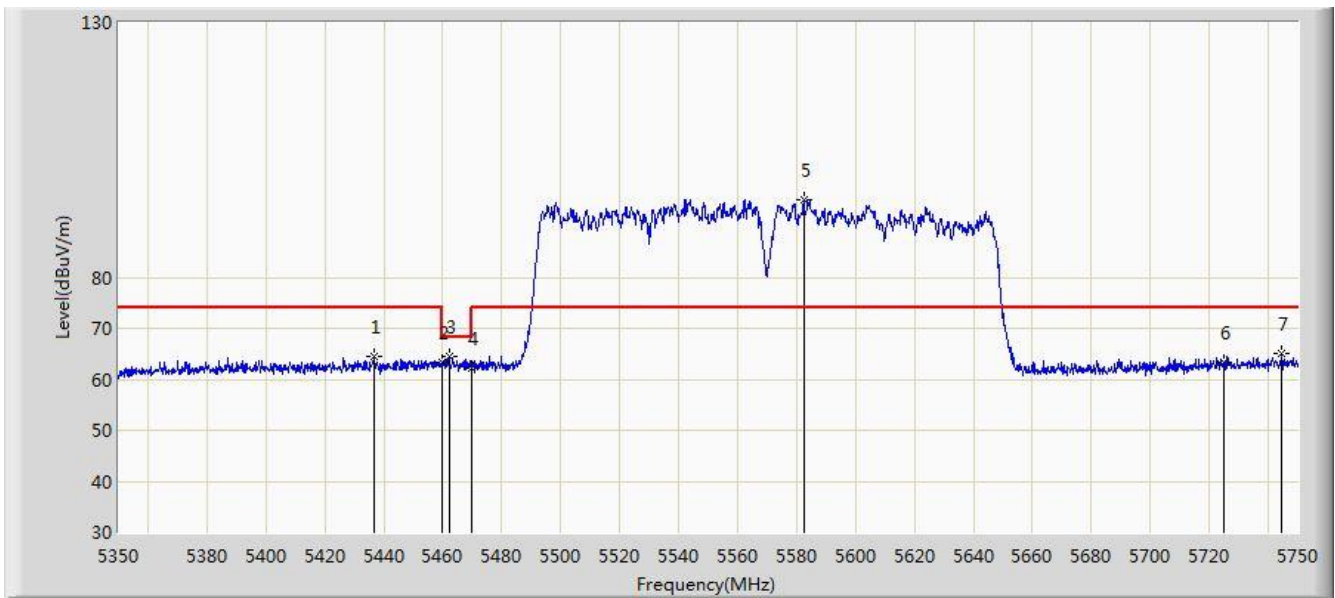


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5436.600	64.473	60.358	-9.527	74.000	4.114	PK
2			5460.000	63.202	59.022	-10.798	74.000	4.180	PK
3			5462.200	64.571	60.386	-3.629	68.200	4.185	PK
4			5470.000	62.125	57.923	-6.075	68.200	4.202	PK
5		*	5582.400	95.074	90.586	N/A	N/A	4.487	PK
6			5725.000	63.409	58.380	-10.591	74.000	5.029	PK
7			5744.600	65.117	59.964	-8.883	74.000	5.152	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 11:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ac-VHT160 at Channel 5570MHz (CDD Mode)	

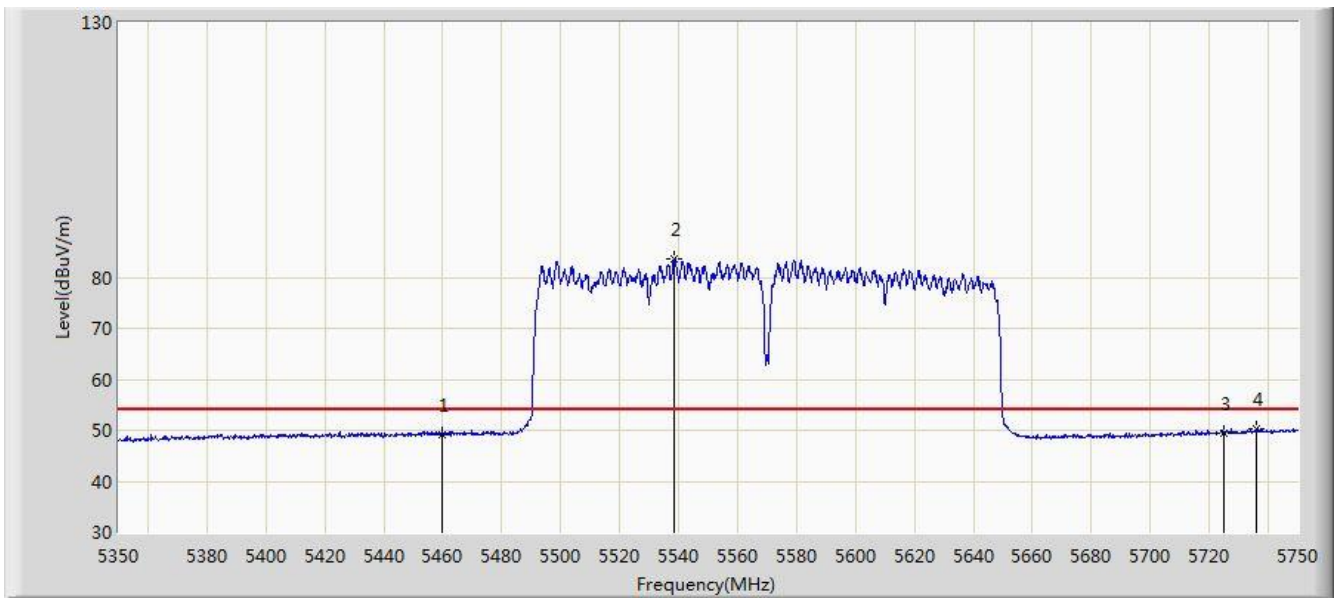


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	49.171	44.991	-4.829	54.000	4.180	AV
2		*	5538.600	83.659	79.272	N/A	N/A	4.387	AV
3			5725.000	49.311	44.282	-4.689	54.000	5.029	AV
4			5736.200	50.158	45.058	-3.842	54.000	5.100	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 19:15
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 5180MHz (CDD Mode)	

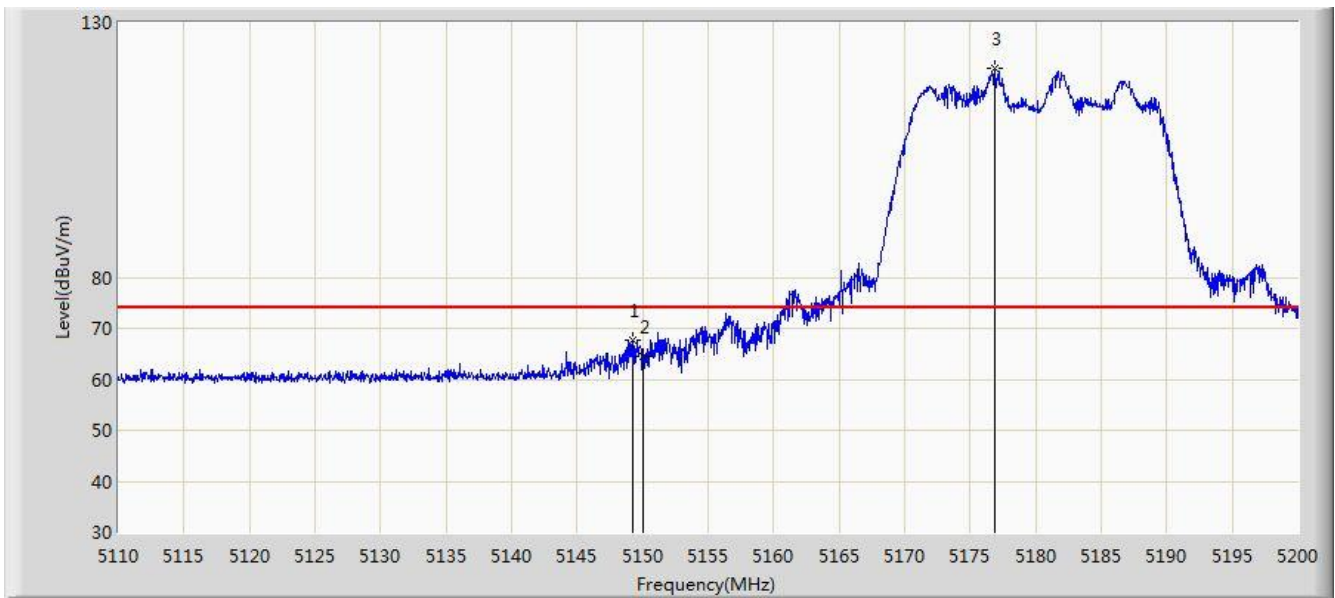


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.285	67.684	63.512	-6.316	74.000	4.171	PK
2			5150.000	64.505	60.336	-9.495	74.000	4.170	PK
3		*	5176.915	121.035	116.955	N/A	N/A	4.080	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 19:56
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 5180MHz (CDD Mode)	

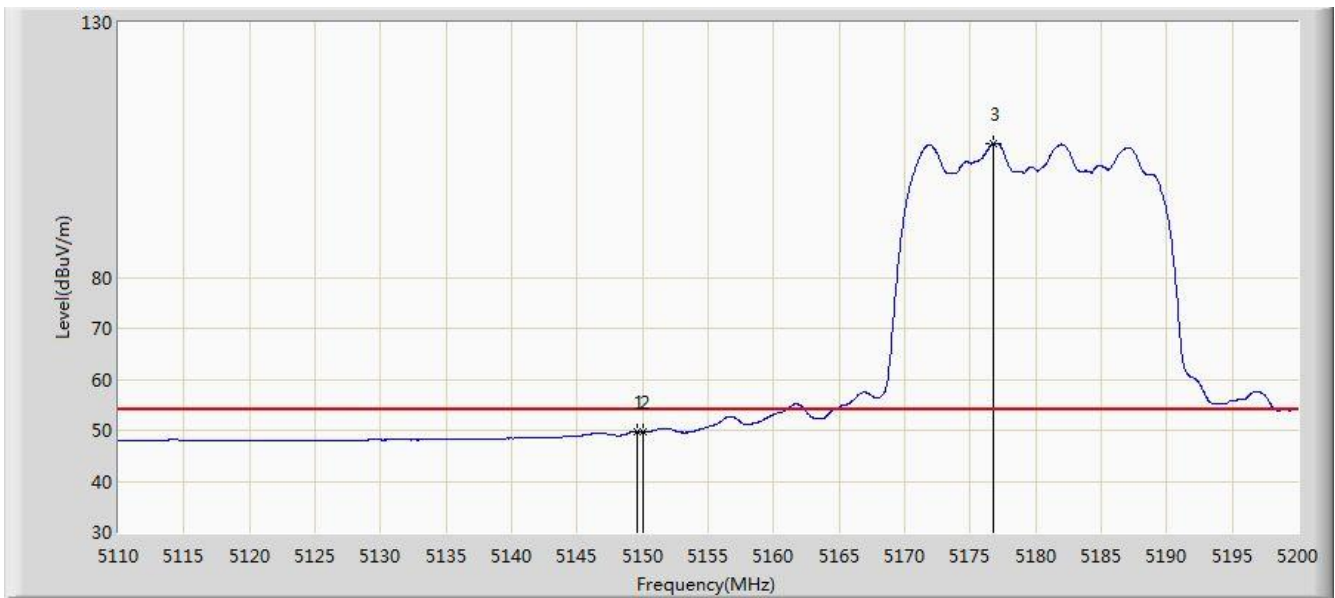


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.555	49.842	45.671	-4.158	54.000	4.170	AV
2			5150.000	49.707	45.538	-4.293	54.000	4.170	AV
3		*	5176.780	106.275	102.195	N/A	N/A	4.081	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 19:59
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 5180MHz (CDD Mode)	

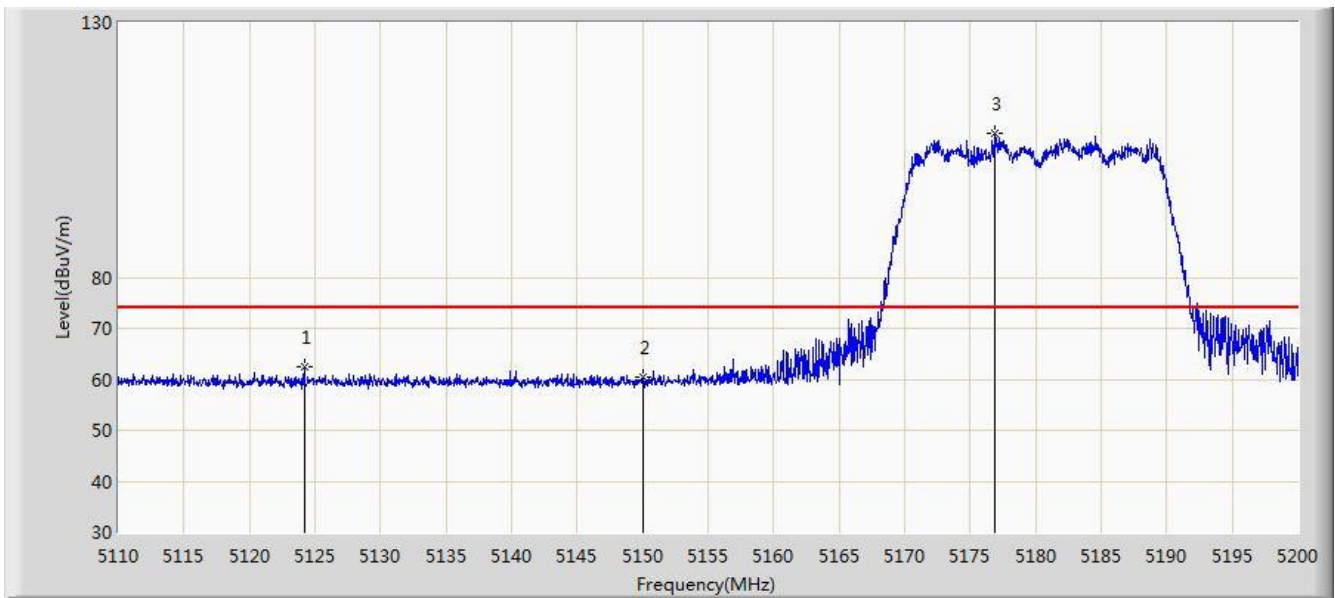


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5124.175	62.320	58.145	-11.680	74.000	4.175	PK
2			5150.000	60.327	56.158	-13.673	74.000	4.170	PK
3		*	5176.825	108.132	104.052	N/A	N/A	4.081	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 20:01
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 5180MHz (CDD Mode)	

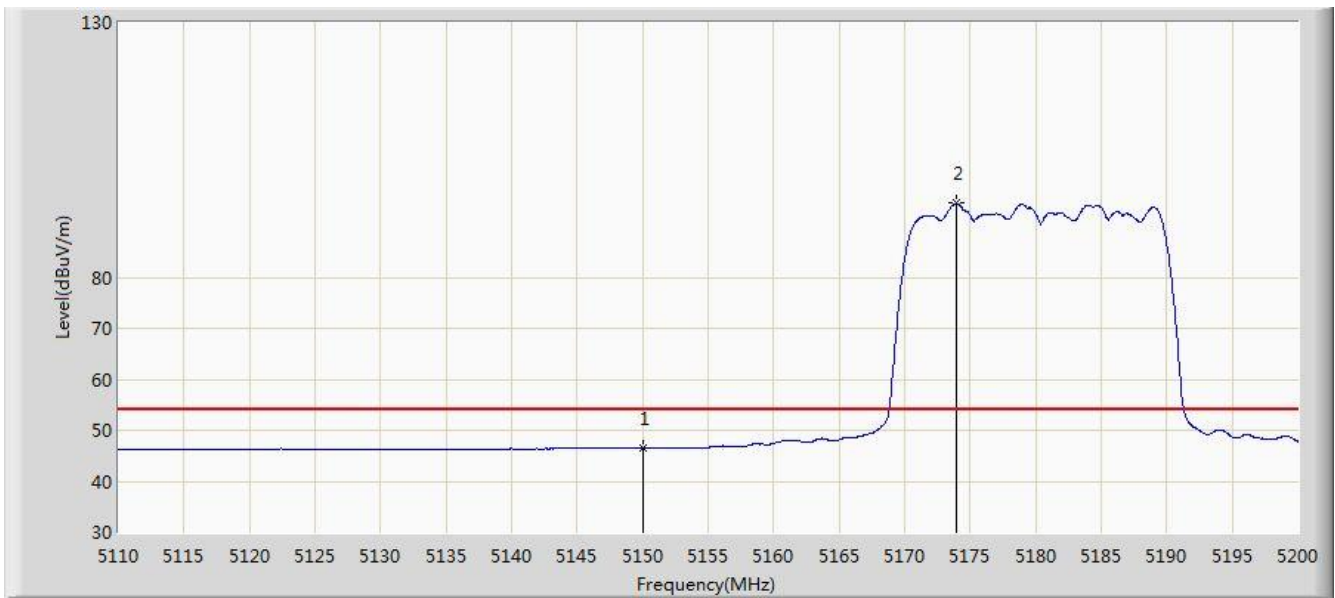


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.476	42.307	-7.524	54.000	4.170	AV
2		*	5173.900	94.509	90.419	N/A	N/A	4.091	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 20:03
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 5320MHz (CDD Mode)	

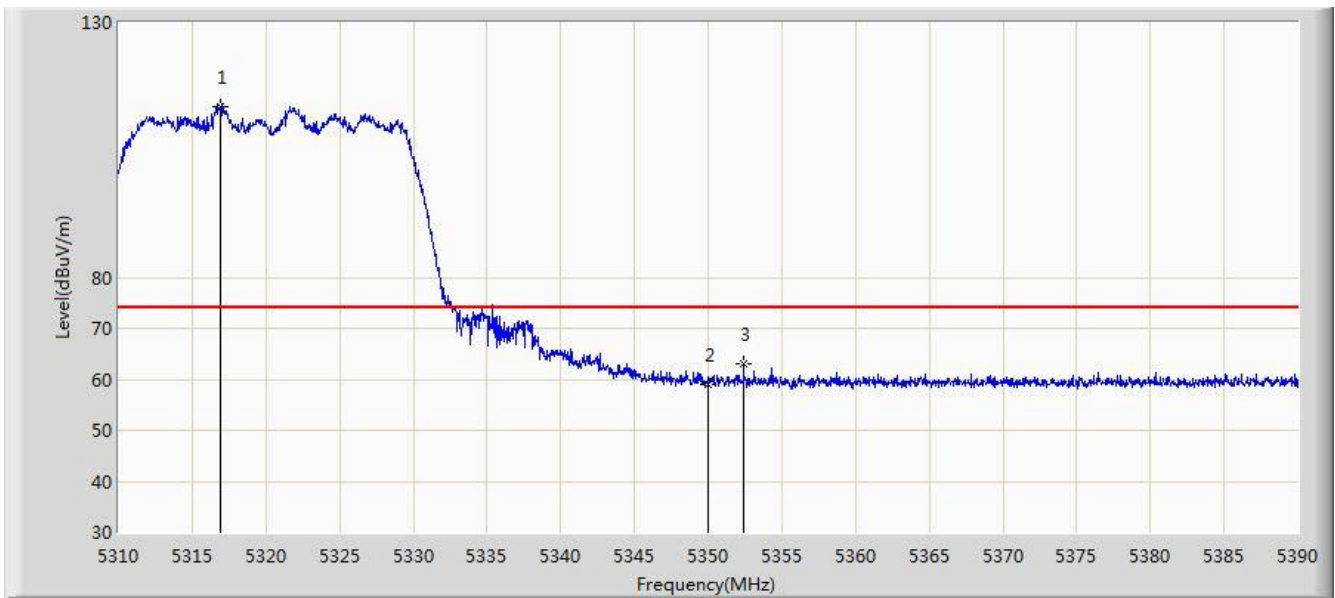

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5316.920	113.404	109.561	N/A	N/A	3.842	PK
2			5350.000	59.023	55.118	-14.977	74.000	3.904	PK
3			5352.400	63.170	59.261	-10.830	74.000	3.909	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 20:06
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 5320MHz (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5324.640	99.824	95.967	N/A	N/A	3.857	AV
2			5350.000	46.973	43.068	-7.027	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 20:08
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 5320MHz (CDD Mode)	

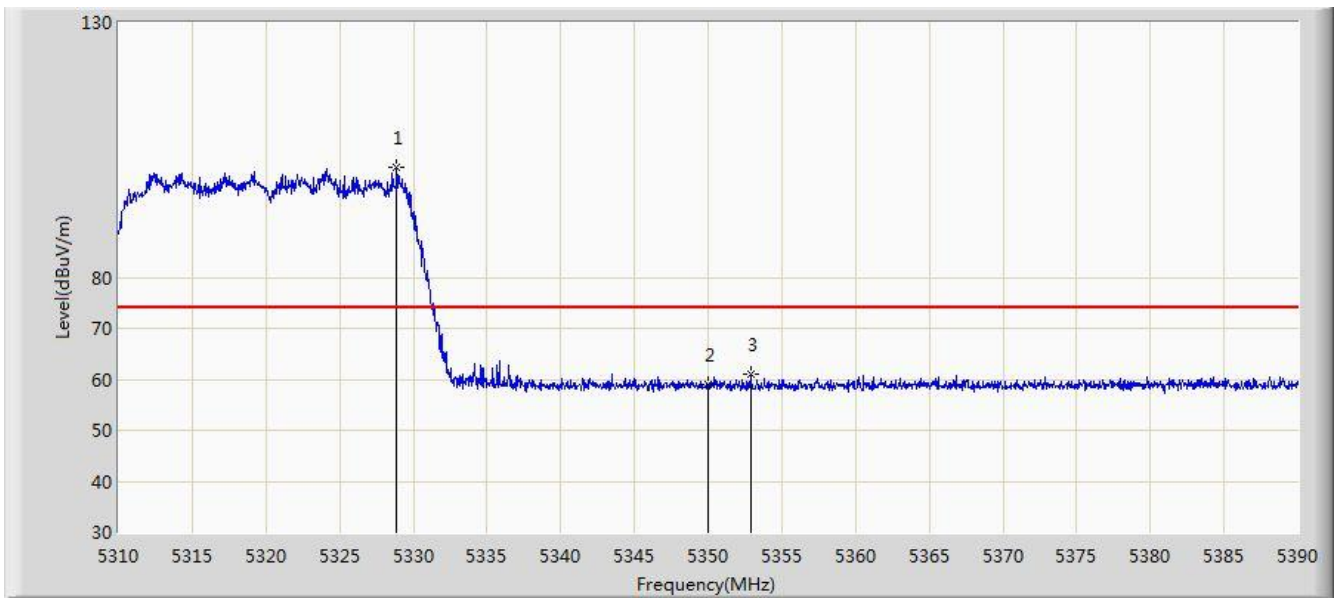


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5328.880	101.527	97.662	N/A	N/A	3.866	PK
2			5350.000	58.894	54.989	-15.106	74.000	3.904	PK
3			5352.880	60.985	57.075	-13.015	74.000	3.911	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 20:10
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 5320MHz (CDD Mode)	

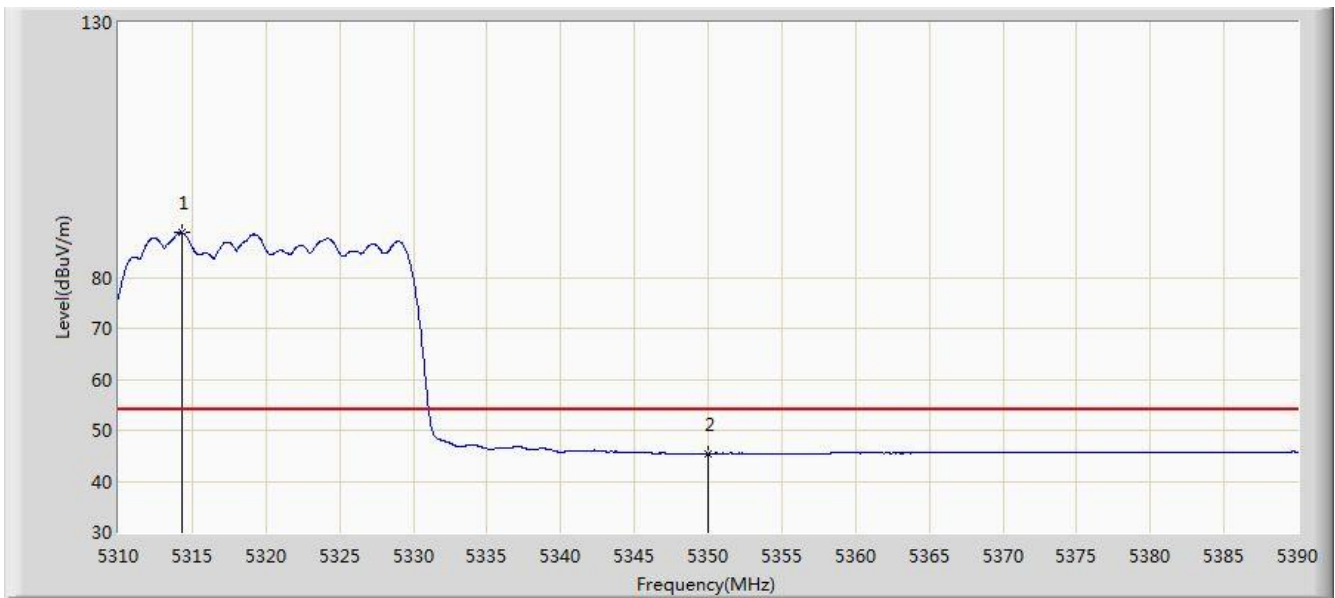


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.320	88.721	84.883	N/A	N/A	3.839	AV
2			5350.000	45.438	41.533	-8.562	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 20:12
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 5500MHz (CDD Mode)	

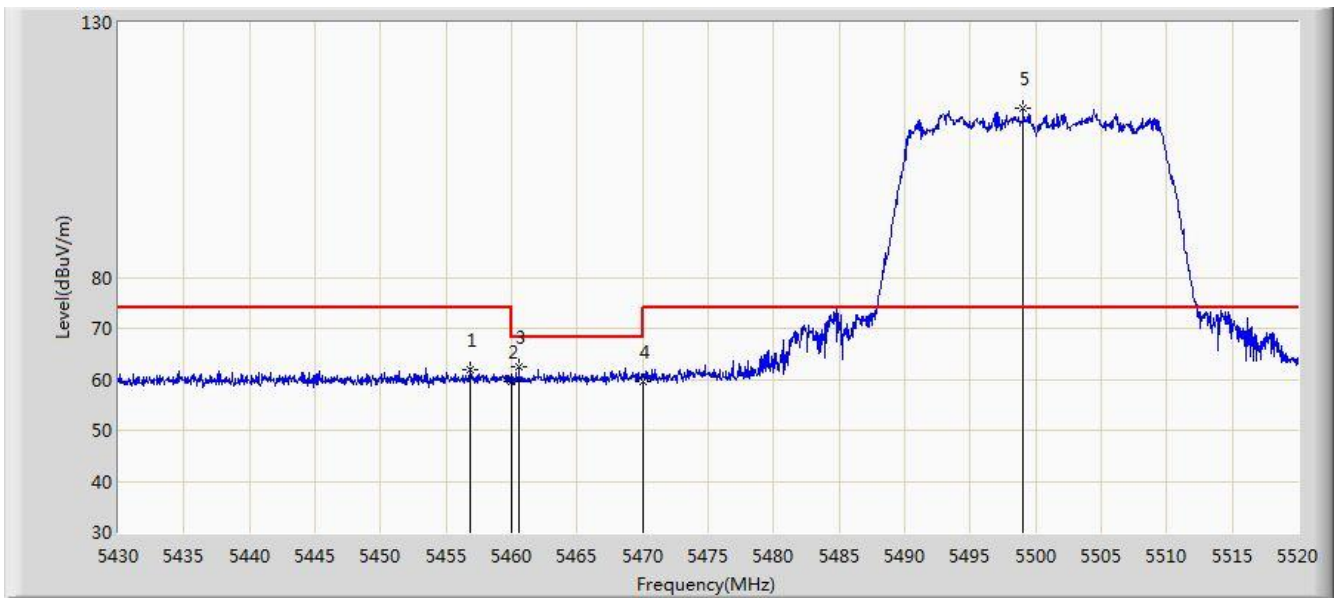


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.865	62.026	57.852	-11.974	74.000	4.173	PK
2			5460.000	59.700	55.520	-14.300	74.000	4.180	PK
3			5460.555	62.579	58.398	-5.621	68.200	4.181	PK
4			5470.000	59.555	55.353	-8.645	68.200	4.202	PK
5		*	5499.030	113.075	108.806	N/A	N/A	4.270	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 20:14
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 5500MHz (CDD Mode)	

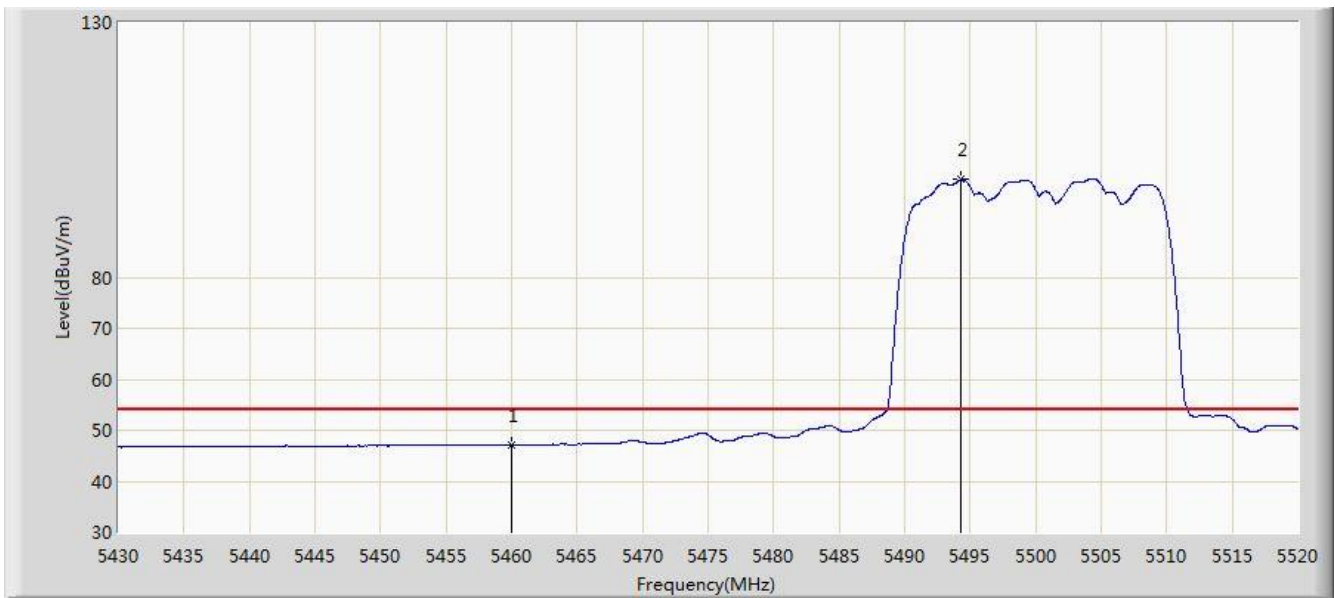


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.184	43.004	-6.816	54.000	4.180	AV
2		*	5494.260	99.137	94.879	N/A	N/A	4.258	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 20:17
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 5500MHz (CDD Mode)	

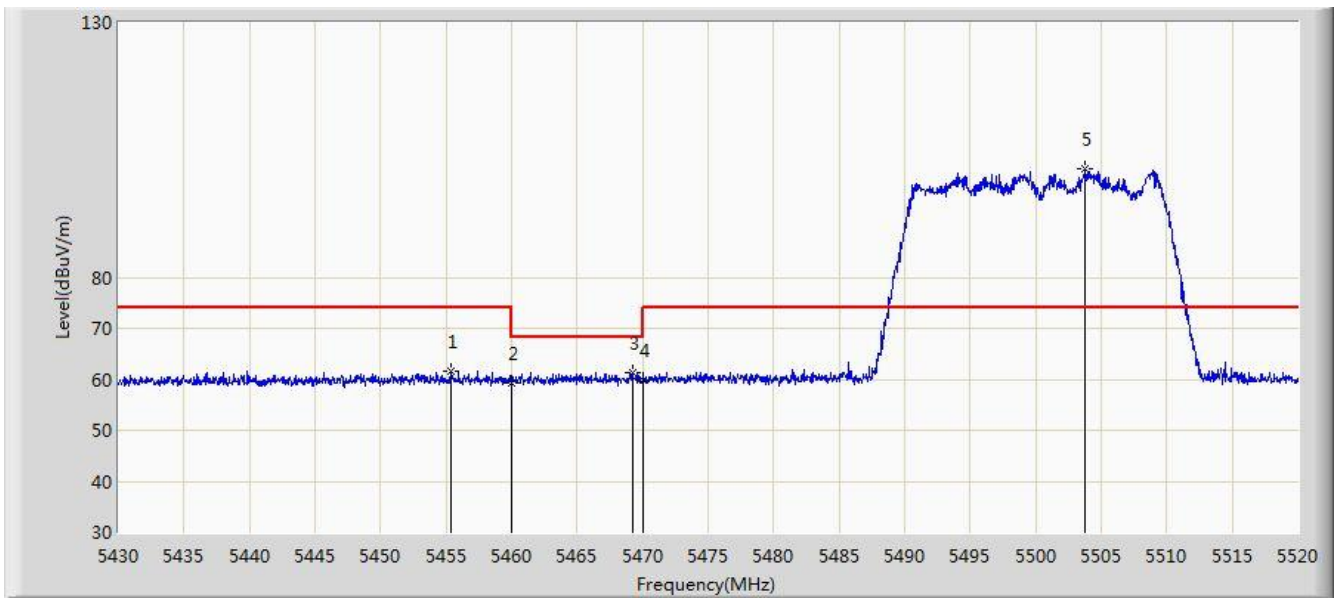


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.380	61.701	57.531	-12.299	74.000	4.170	PK
2			5460.000	59.358	55.178	-14.642	74.000	4.180	PK
3			5469.195	61.299	57.098	-6.901	68.200	4.201	PK
4			5470.000	59.955	55.753	-8.245	68.200	4.202	PK
5		*	5503.755	101.243	96.960	N/A	N/A	4.283	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 20:19
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 5500MHz (CDD Mode)	

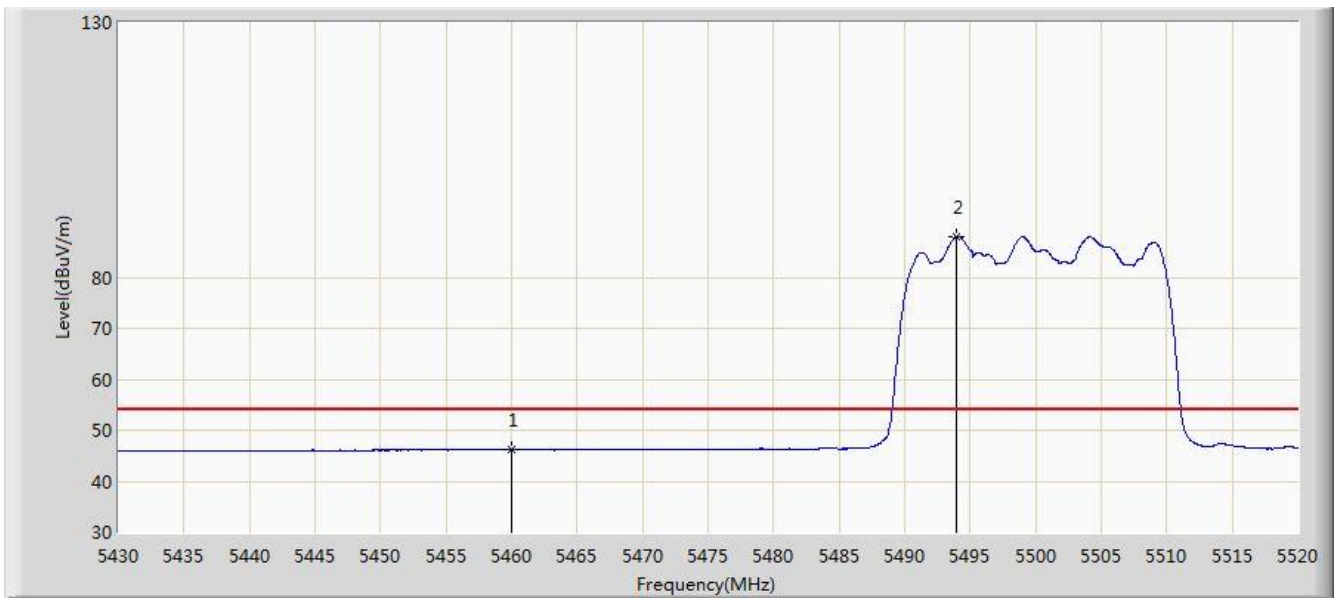


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.145	41.965	-7.855	54.000	4.180	AV
2		*	5493.900	87.940	83.683	N/A	N/A	4.257	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 20:21
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 5700MHz (CDD Mode)	

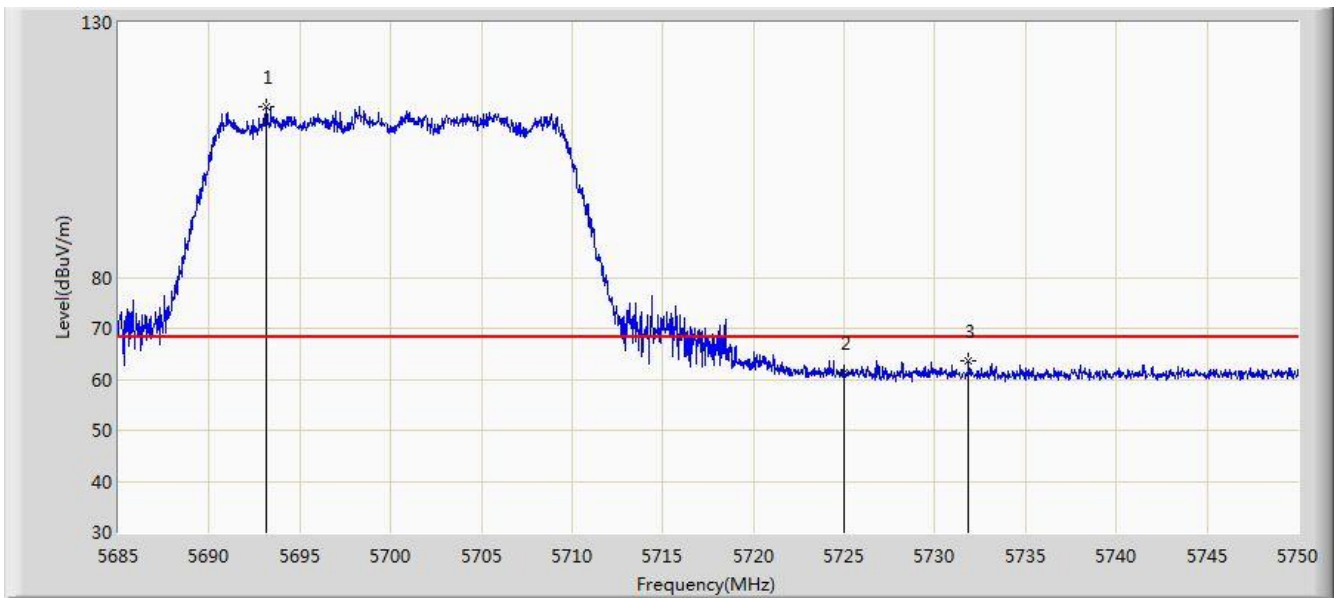


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5693.158	113.420	108.578	N/A	N/A	4.841	PK
2			5725.000	61.322	56.293	-6.878	68.200	5.029	PK
3			5731.865	63.716	58.643	-4.484	68.200	5.073	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 20:23
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 5700MHz (CDD Mode)	

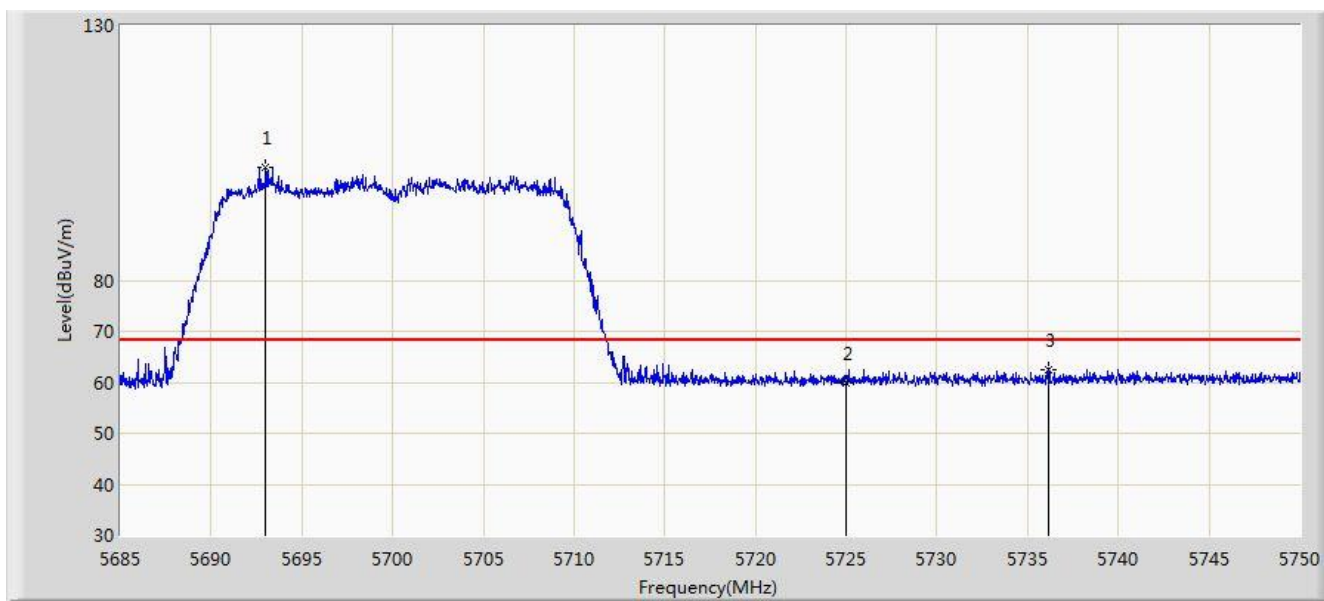


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5692.995	102.305	97.464	N/A	N/A	4.841	PK
2			5725.000	59.822	54.793	-8.378	68.200	5.029	PK
3			5736.187	62.576	57.476	-5.624	68.200	5.100	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 20:25
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 5745MHz (CDD Mode)	

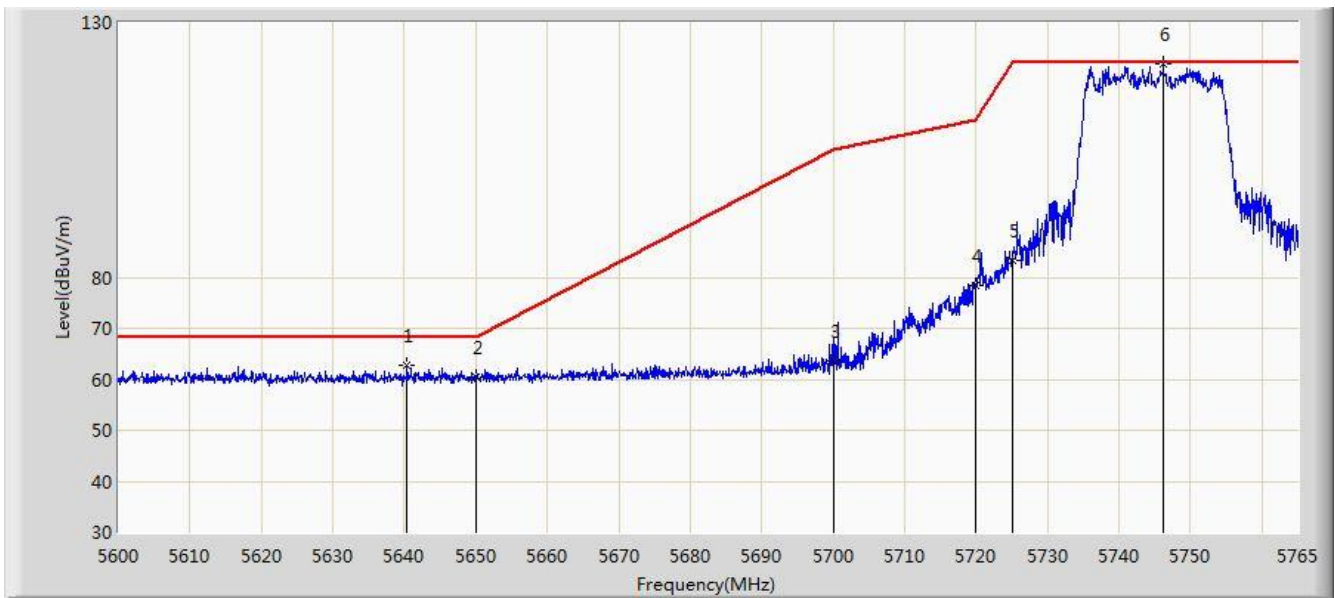


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5640.342	62.752	58.113	-5.448	68.200	4.638	PK
2			5650.000	60.492	55.821	-7.708	68.200	4.671	PK
3			5700.000	63.559	58.681	-41.641	105.200	4.878	PK
4			5720.000	78.363	73.366	-32.437	110.800	4.997	PK
5			5725.000	83.394	78.365	-38.806	122.200	5.029	PK
6		*	5746.190	121.935	116.773	N/A	N/A	5.161	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 20:27
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 5745MHz (CDD Mode)	

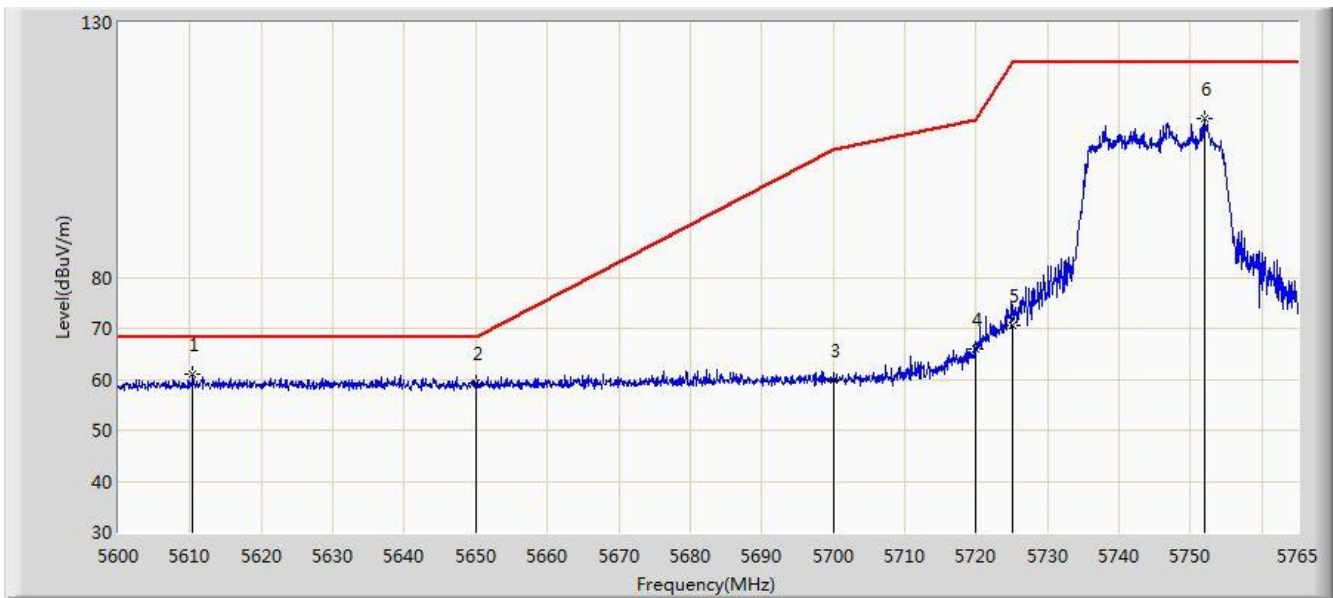


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5610.395	61.013	56.460	-7.187	68.200	4.552	PK
2			5650.000	59.263	54.592	-8.937	68.200	4.671	PK
3			5700.000	59.756	54.878	-45.444	105.200	4.878	PK
4			5720.000	66.006	61.009	-44.794	110.800	4.997	PK
5			5725.000	70.637	65.608	-51.563	122.200	5.029	PK
6			5751.965	111.202	106.008	N/A	N/A	5.194	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 20:29
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 5825MHz (CDD Mode)	

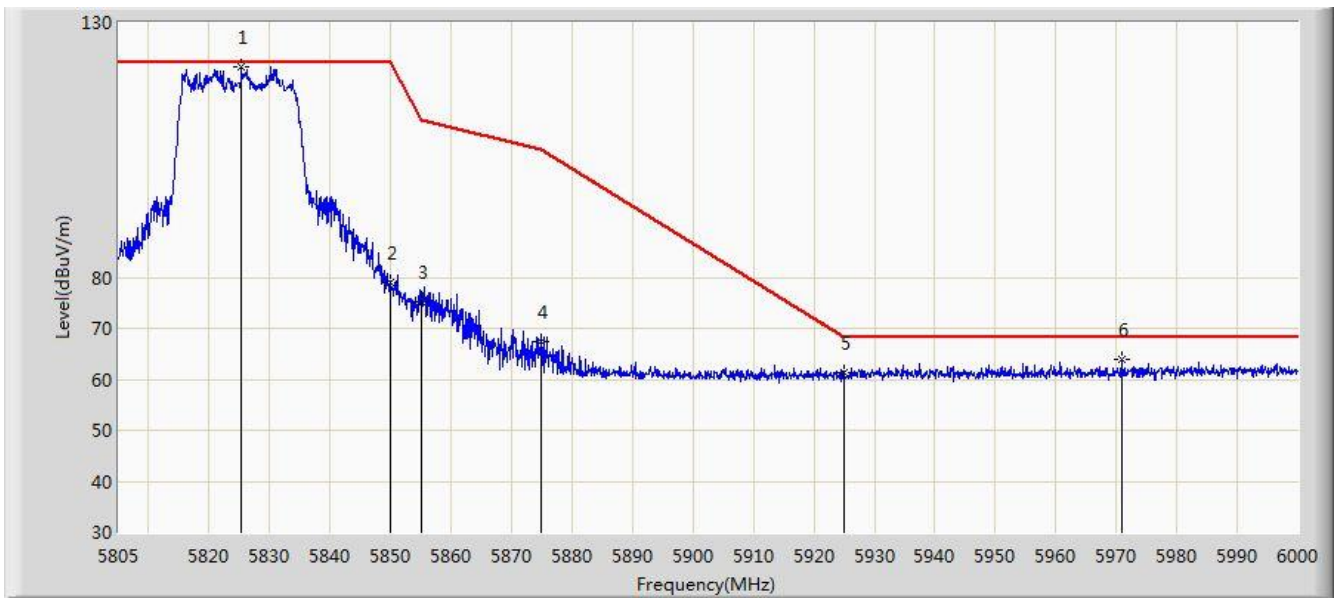


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5825.280	121.433	115.843	N/A	N/A	5.589	PK
2			5850.000	78.912	73.186	-43.288	122.200	5.726	PK
3			5855.000	75.141	69.395	-35.659	110.800	5.746	PK
4			5875.000	67.304	61.484	-37.896	105.200	5.820	PK
5			5925.000	61.295	55.329	-6.905	68.200	5.967	PK
6			5970.848	63.803	57.741	-4.397	68.200	6.063	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 20:31
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE20 at Channel 5825MHz (CDD Mode)	

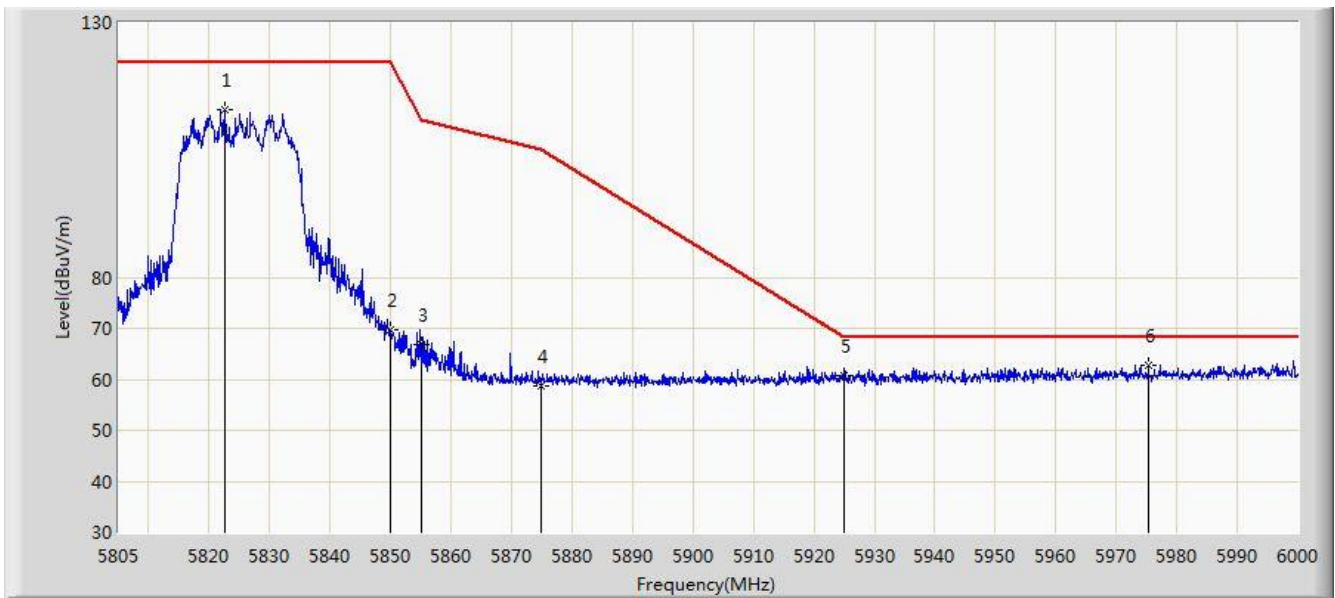


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5822.647	112.941	107.367	N/A	N/A	5.574	PK
2			5850.000	69.760	64.034	-52.440	122.200	5.726	PK
3			5855.000	66.717	60.971	-44.083	110.800	5.746	PK
4			5875.000	58.754	52.934	-46.446	105.200	5.820	PK
5			5925.000	60.721	54.755	-7.479	68.200	5.967	PK
6		*	5975.333	62.780	56.710	-5.420	68.200	6.069	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 20:34
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 5190MHz (CDD Mode)	

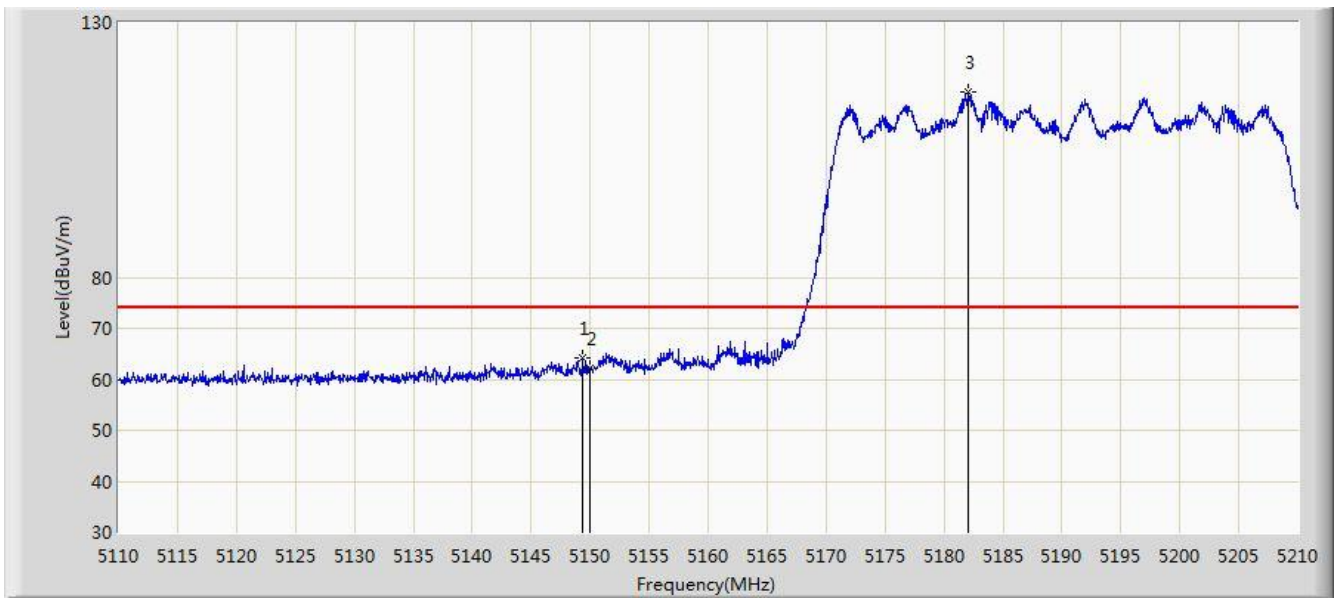


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.400	64.096	59.925	-9.904	74.000	4.171	PK
2			5150.000	62.129	57.960	-11.871	74.000	4.170	PK
3		*	5182.000	116.405	112.343	N/A	N/A	4.062	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 20:36
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 5190MHz (CDD Mode)	

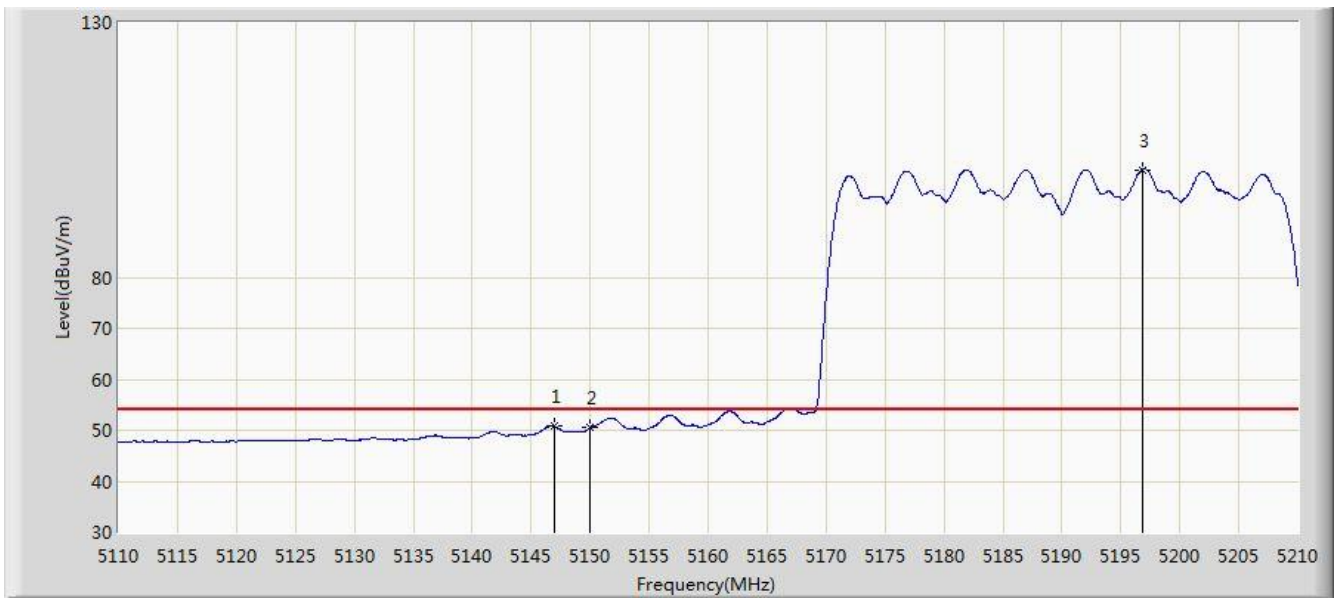


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.950	50.763	46.587	-3.237	54.000	4.176	AV
2			5150.000	50.462	46.293	-3.538	54.000	4.170	AV
3		*	5196.800	101.030	97.021	N/A	N/A	4.010	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 20:38
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 5190MHz (CDD Mode)	

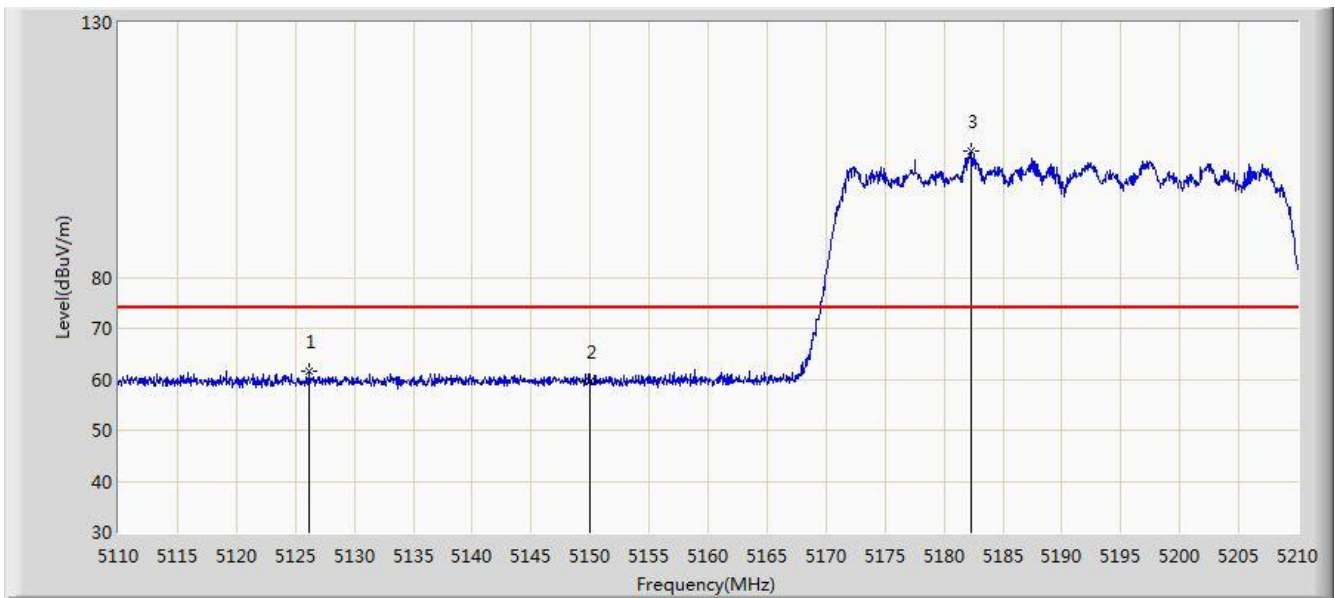


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5126.150	61.532	57.357	-12.468	74.000	4.175	PK
2			5150.000	59.573	55.404	-14.427	74.000	4.170	PK
3		*	5182.350	104.666	100.606	N/A	N/A	4.061	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 20:40
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 5190MHz (CDD Mode)	

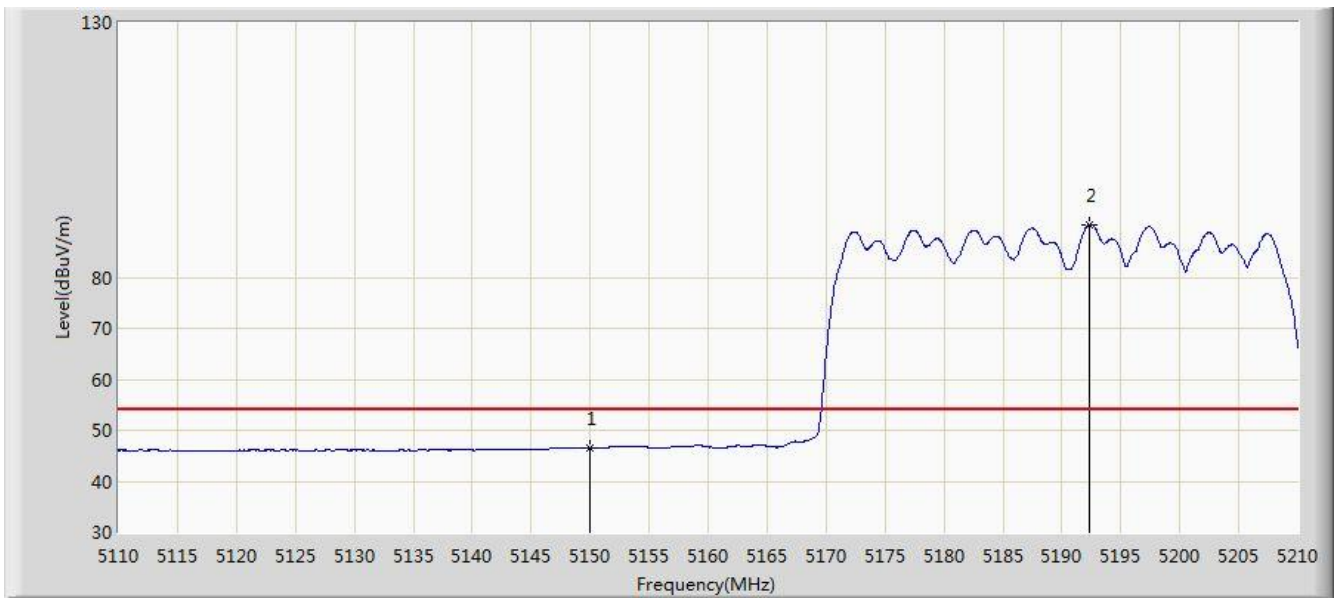


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.459	42.290	-7.541	54.000	4.170	AV
2		*	5192.350	90.416	86.391	N/A	N/A	4.025	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 20:44
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 5310MHz (CDD Mode)	

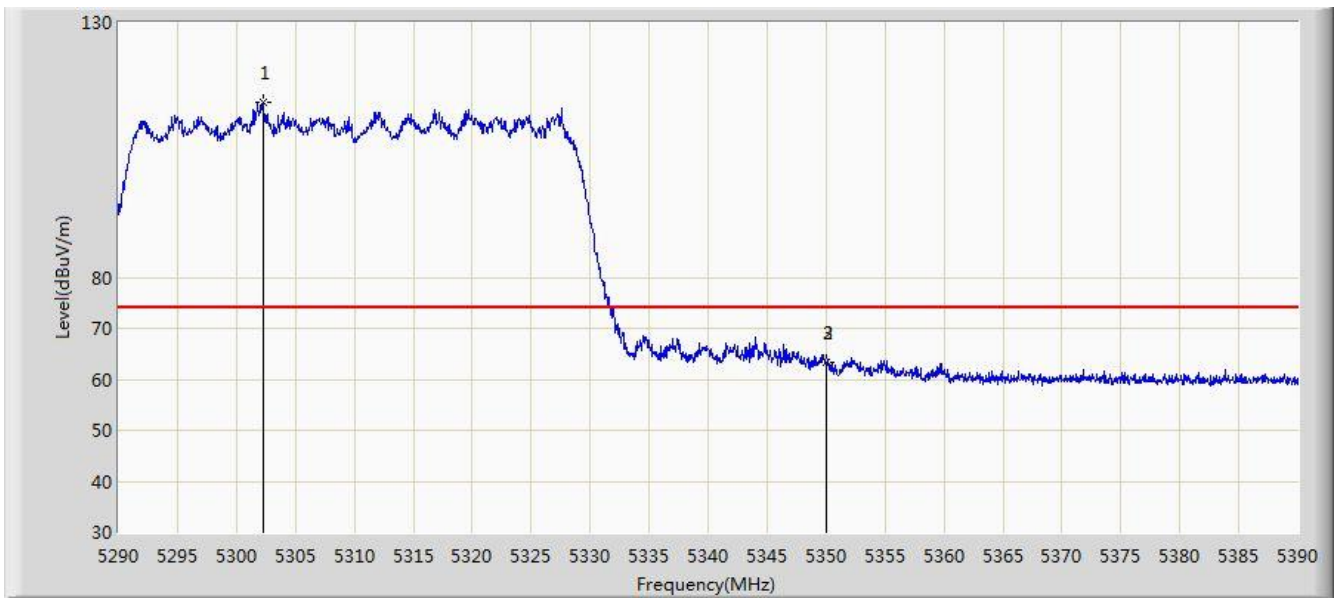


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5302.250	114.473	110.658	N/A	N/A	3.815	PK
2			5350.000	63.404	59.499	-10.596	74.000	3.904	PK
3			5350.000	63.404	59.499	-10.596	74.000	3.904	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 20:47
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 5310MHz (CDD Mode)	

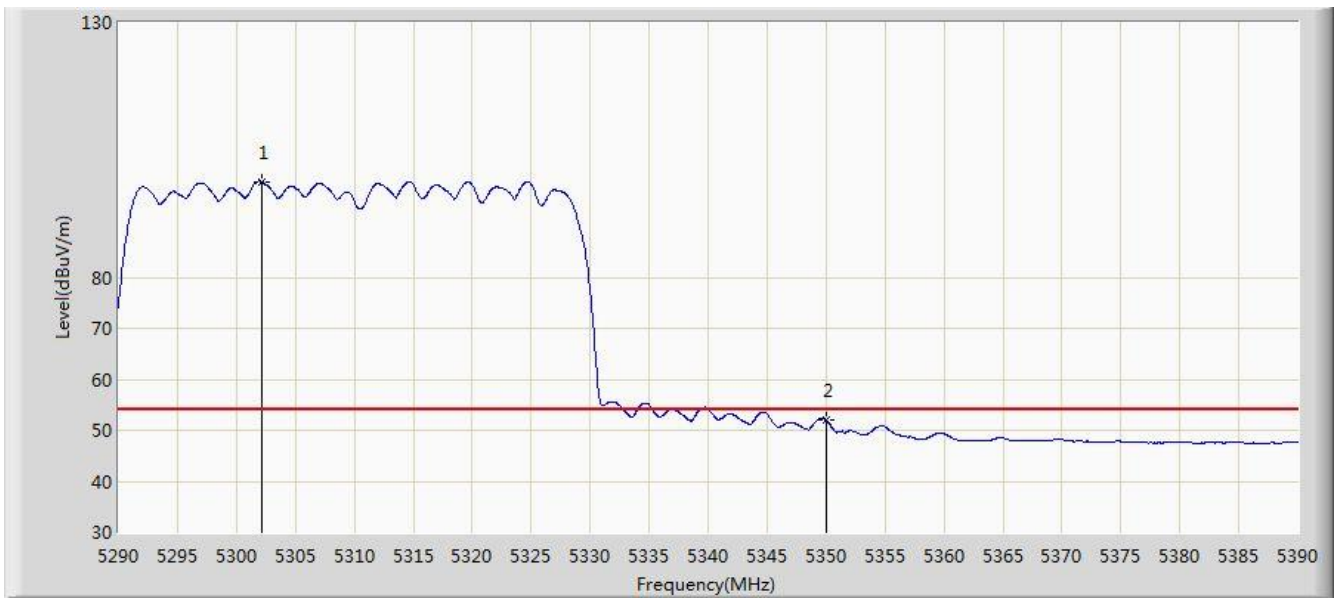


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5302.100	98.797	94.982	N/A	N/A	3.814	AV
2			5350.000	51.920	48.015	-2.080	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 20:48
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 5310MHz (CDD Mode)	

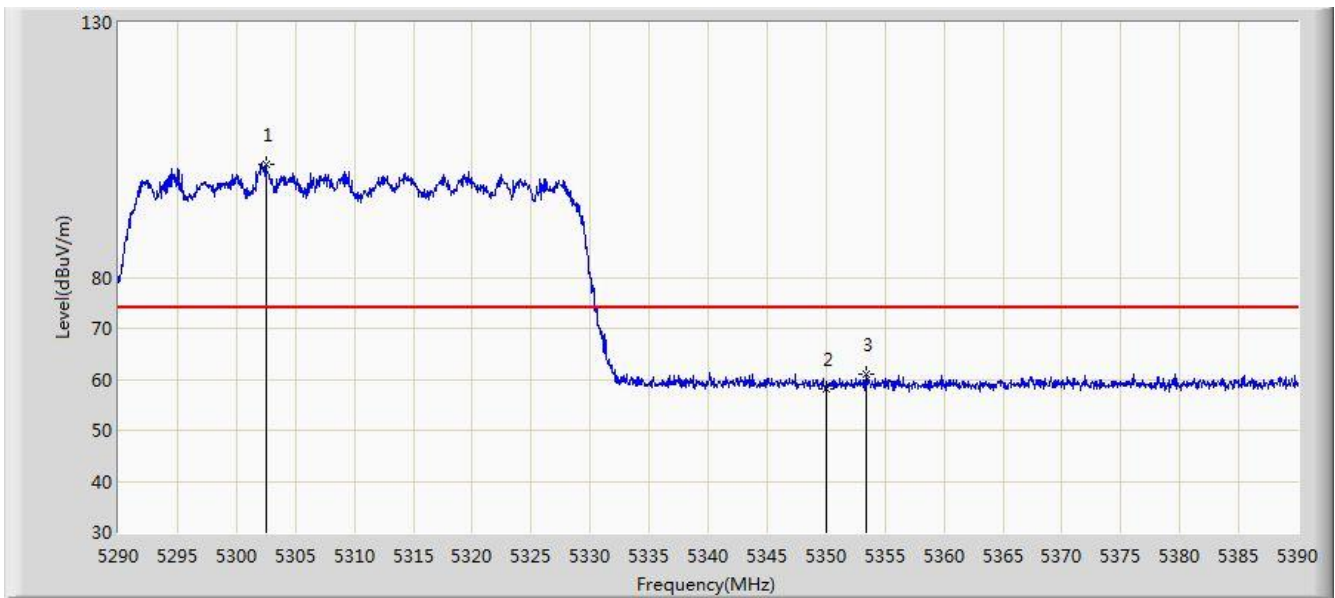


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5302.500	102.224	98.408	N/A	N/A	3.816	PK
2			5350.000	58.221	54.316	-15.779	74.000	3.904	PK
3			5353.450	61.072	57.161	-12.928	74.000	3.911	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 20:50
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 5310MHz (CDD Mode)	

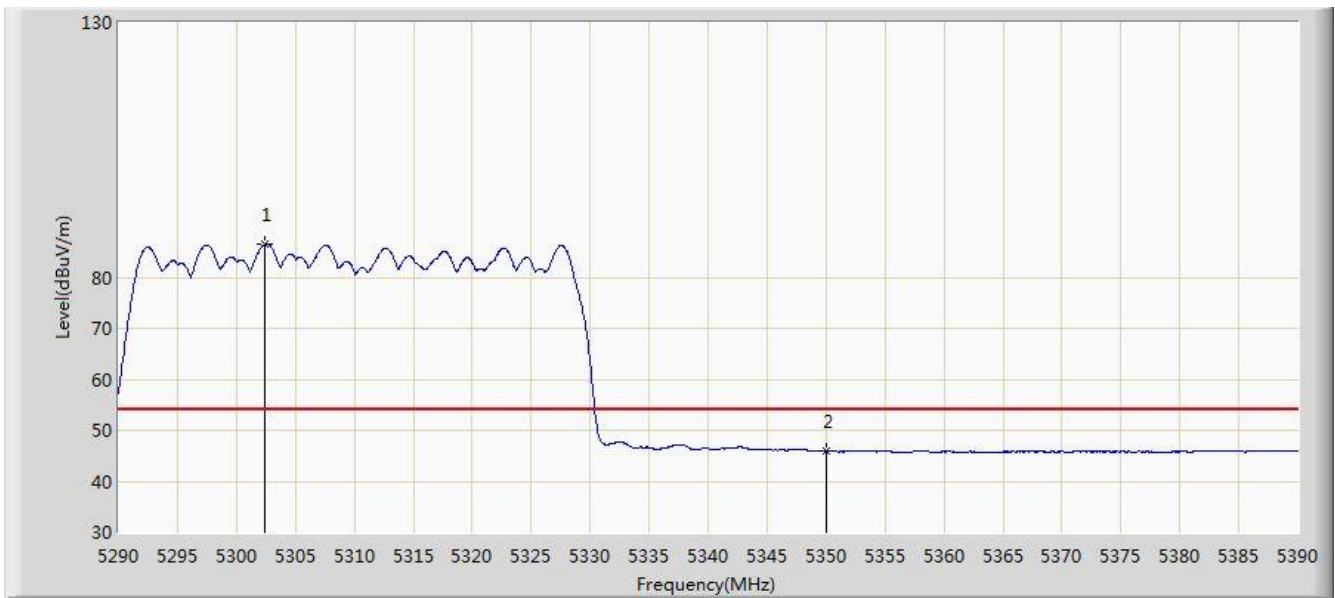


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5302.400	86.509	82.694	N/A	N/A	3.815	AV
2			5350.000	46.082	42.177	-7.918	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 20:51
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 5510MHz (CDD Mode)	

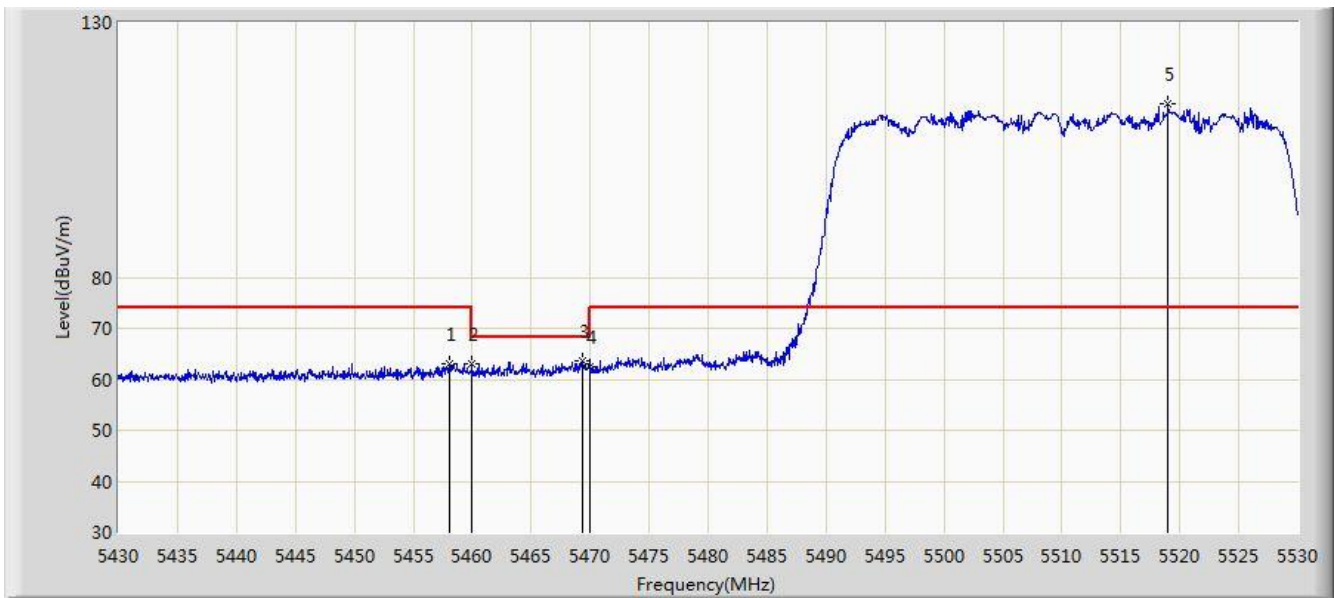


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.100	62.918	58.742	-11.082	74.000	4.176	PK
2			5460.000	62.947	58.767	-11.053	74.000	4.180	PK
3			5469.400	63.507	59.306	-4.693	68.200	4.201	PK
4			5470.000	62.347	58.145	-5.853	68.200	4.202	PK
5		*	5519.000	114.040	109.712	N/A	N/A	4.328	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 20:54
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 5510MHz (CDD Mode)	

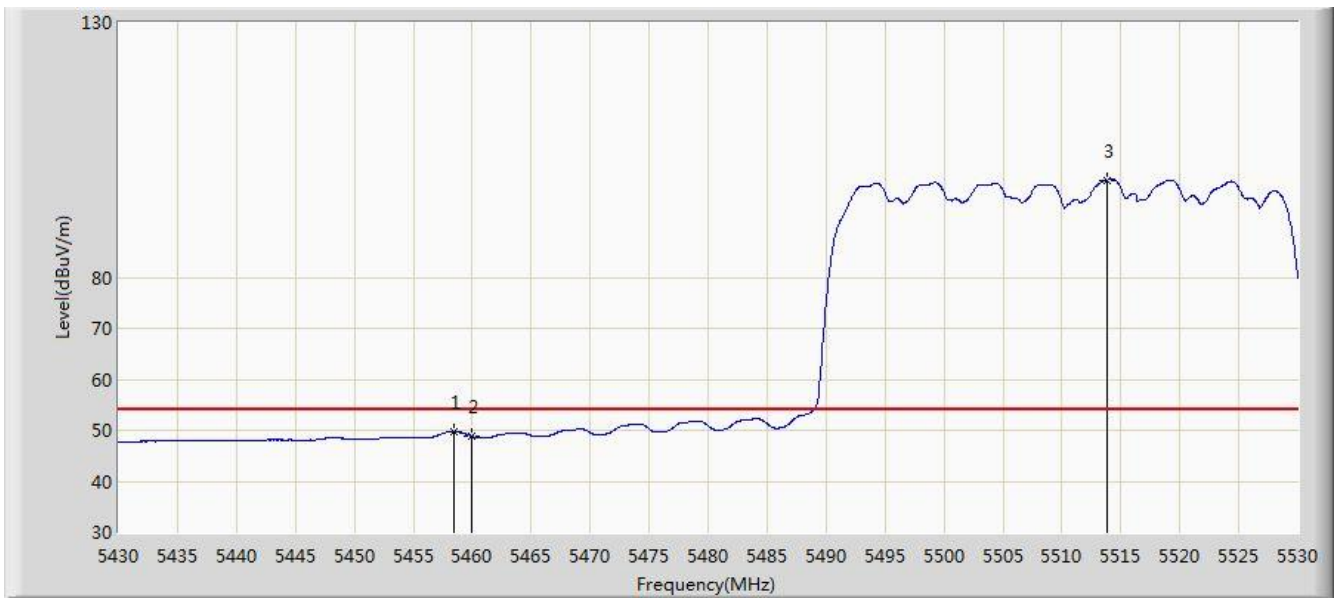


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.400	49.722	45.545	-4.278	54.000	4.177	AV
2			5460.000	48.817	44.637	-5.183	54.000	4.180	AV
3		*	5513.850	99.121	94.809	N/A	N/A	4.313	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 20:55
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 5510MHz (CDD Mode)	

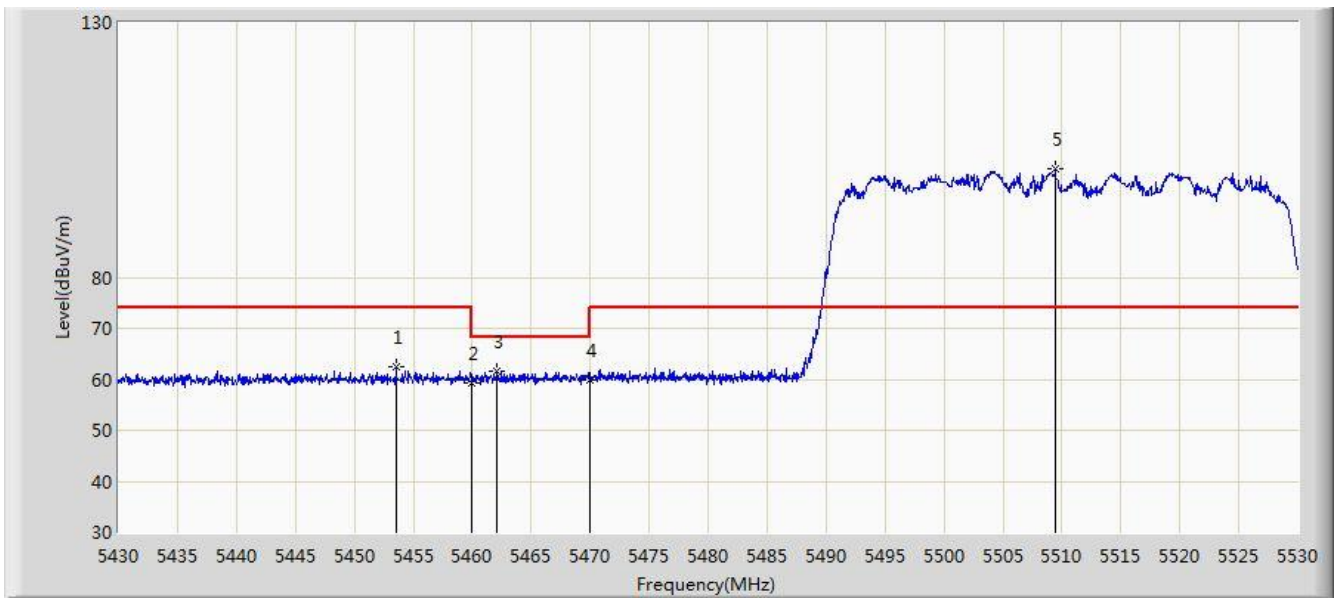


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.550	62.521	58.355	-11.479	74.000	4.166	PK
2			5460.000	59.142	54.962	-14.858	74.000	4.180	PK
3			5462.100	61.690	57.505	-6.510	68.200	4.185	PK
4			5470.000	59.967	55.765	-8.233	68.200	4.202	PK
5		*	5509.450	101.267	96.967	N/A	N/A	4.299	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2019/01/31 - 20:58
Limit: NCC LP0002_1GHz-40GHz	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: AX6000 次世代 Wi-Fi 路由器	Power: AC 110V/60Hz
測試模式: Transmit by 802.11ax-HE40 at Channel 5510MHz (CDD Mode)	

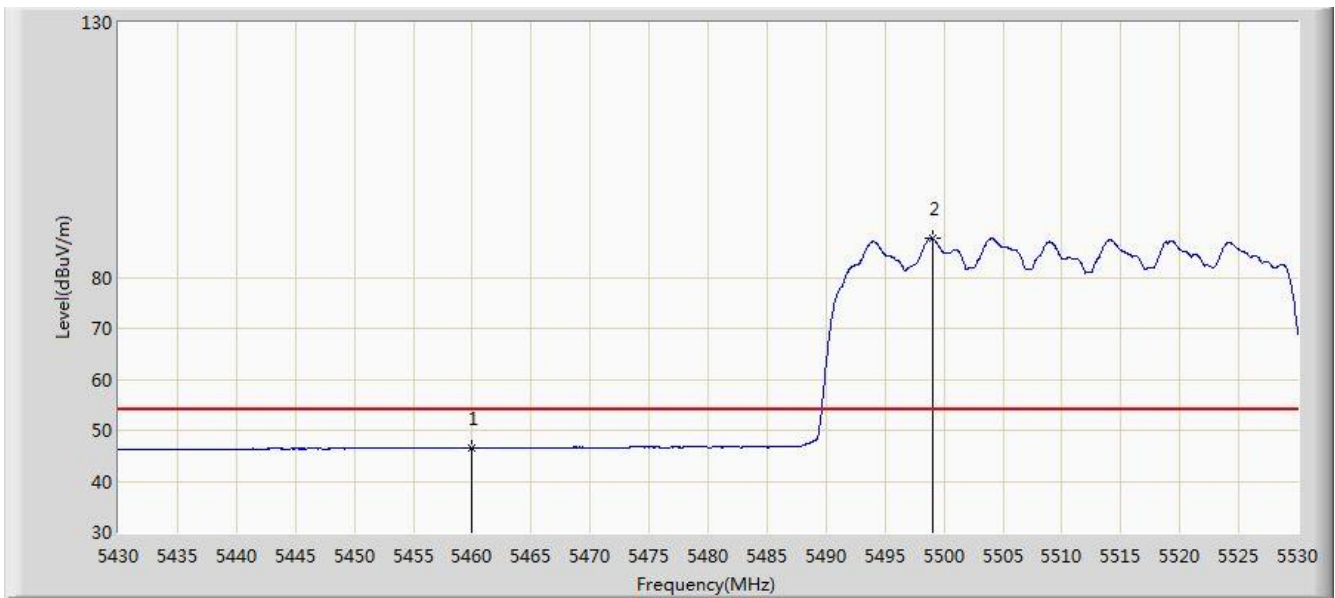

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.565	42.385	-7.435	54.000	4.180	AV
2		*	5499.000	87.656	83.387	N/A	N/A	4.269	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).