


Annex D. Radiated Emission Measurement (5 GHz)

其它不必要之訊號 (1 GHz 以下)

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5500 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

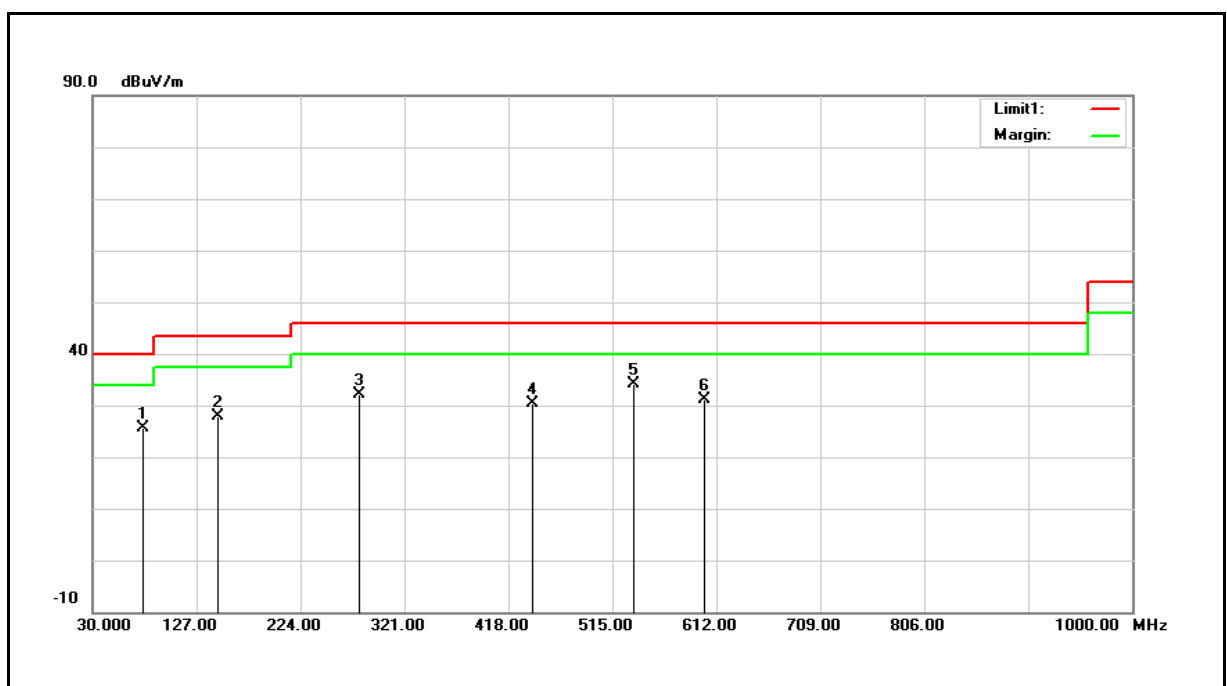

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	77.5300	37.68	-12.14	25.54	40.00	-14.46	QP
2	147.3700	35.51	-7.70	27.81	43.50	-15.69	QP
3	279.2900	39.13	-7.05	32.08	46.00	-13.92	QP
4	440.3100	34.50	-4.07	30.43	46.00	-15.57	QP
5	534.4000	36.95	-2.80	34.15	46.00	-11.85	QP
6	601.3300	32.41	-1.25	31.16	46.00	-14.84	QP


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 25.54 = -12.14 + 37.68

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5500 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

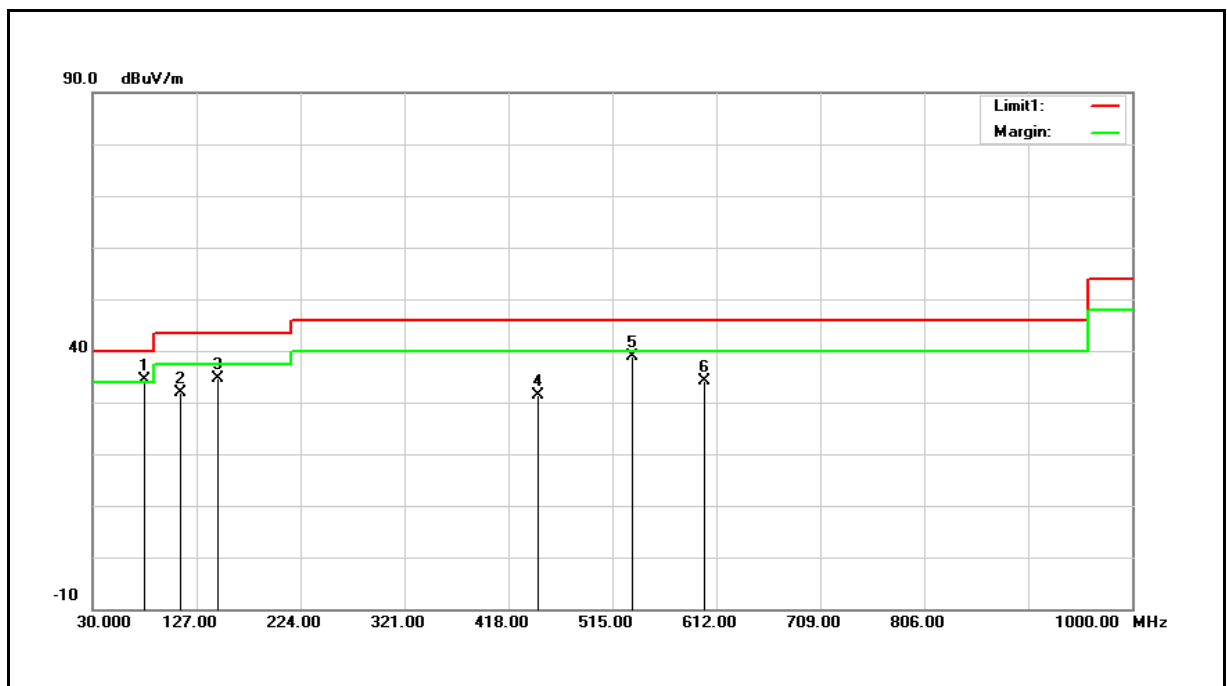

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	78.5000	46.60	-12.34	34.26	40.00	-5.74	QP
2	111.4800	42.82	-10.84	31.98	43.50	-11.52	QP
3	147.3700	42.41	-7.70	34.71	43.50	-8.79	QP
4	445.1600	35.39	-3.99	31.40	46.00	-14.60	QP
5	533.4300	41.66	-2.82	38.84	46.00	-7.16	QP
6	601.3300	35.32	-1.25	34.07	46.00	-11.93	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: $34.26 = -12.34 + 46.60$

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

場強輻射量測 (1 GHz 以上)

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

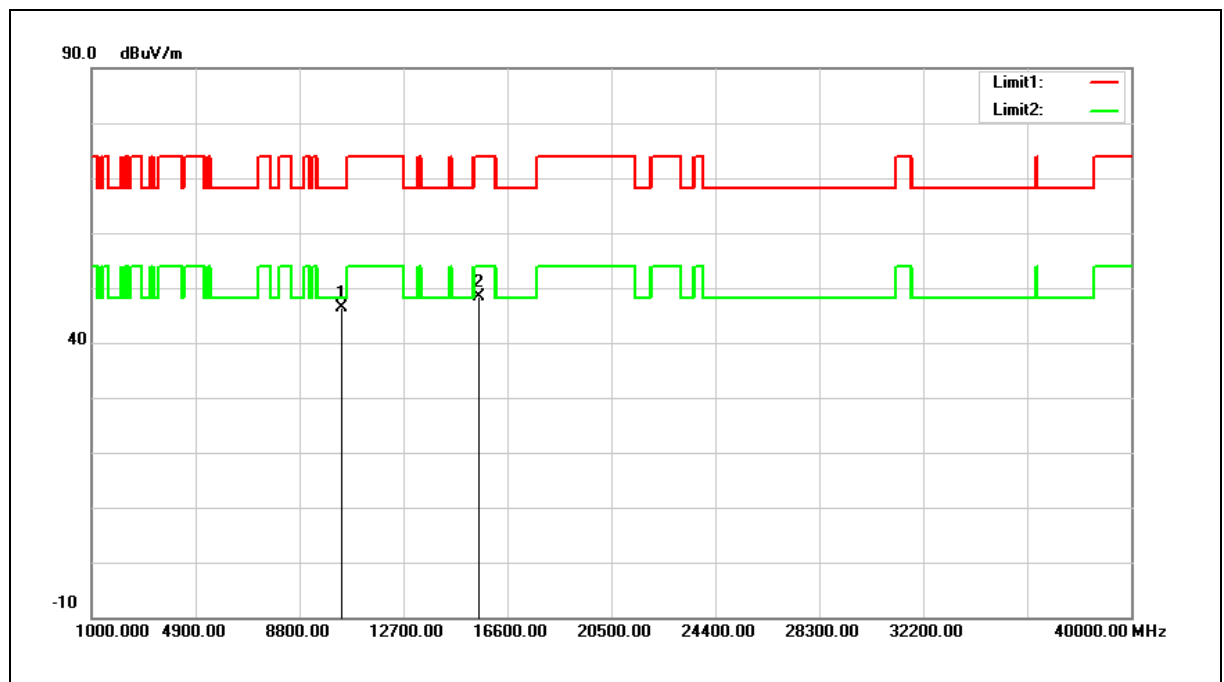

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	34.57	11.69	46.26	68.20	-21.94	peak
2	15540.000	33.85	14.52	48.37	74.00	-25.63	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: $46.26 = 11.69 + 34.57$

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

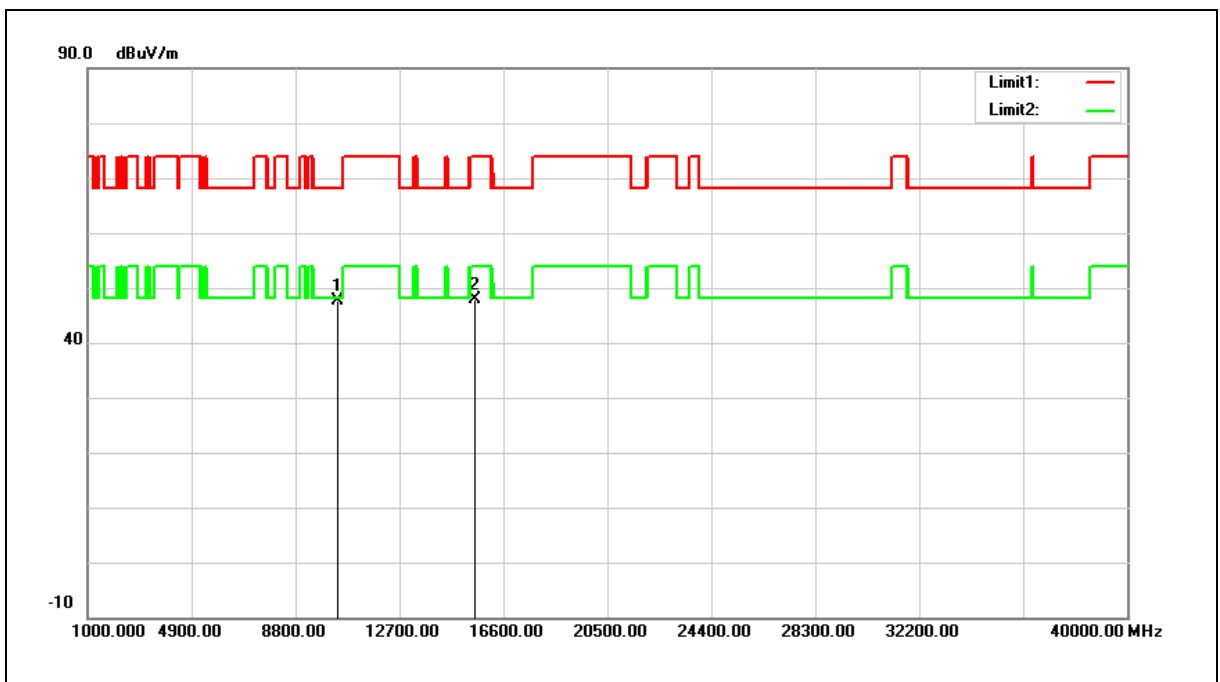

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	35.83	11.69	47.52	68.20	-20.68	peak
2	15540.000	33.24	14.52	47.76	74.00	-26.24	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 47.52 = 11.69 + 35.83

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

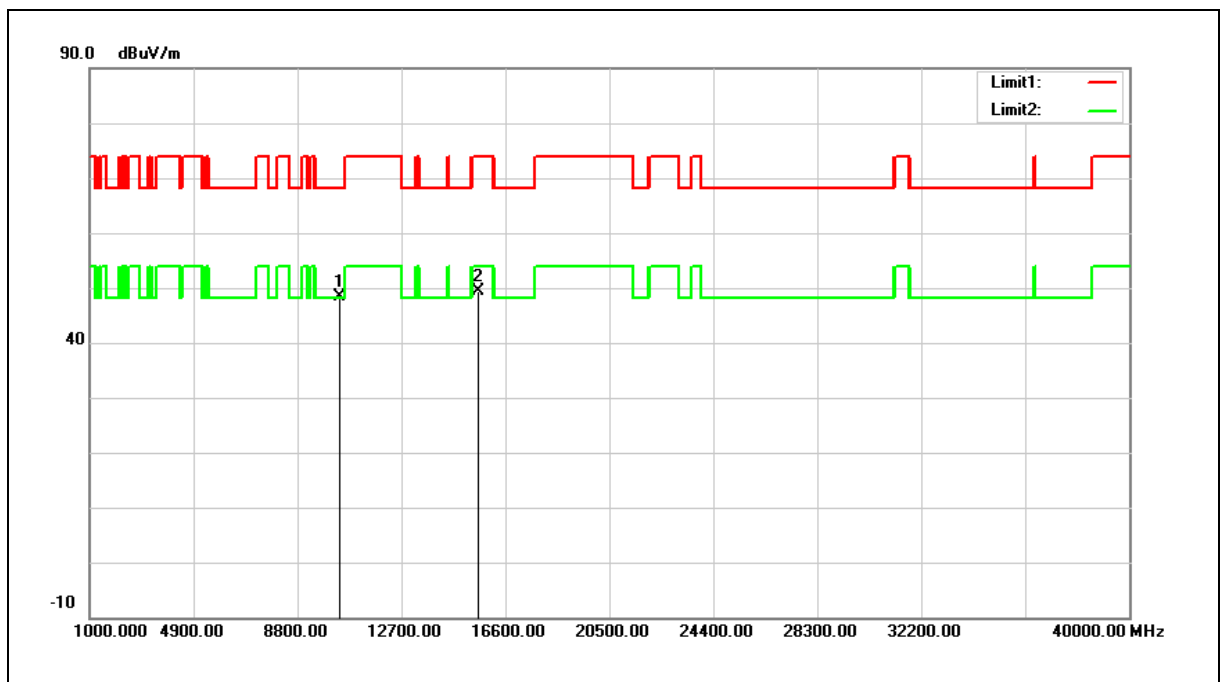


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	36.57	11.79	48.36	68.20	-19.84	peak
2	15600.000	35.02	14.39	49.41	74.00	-24.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

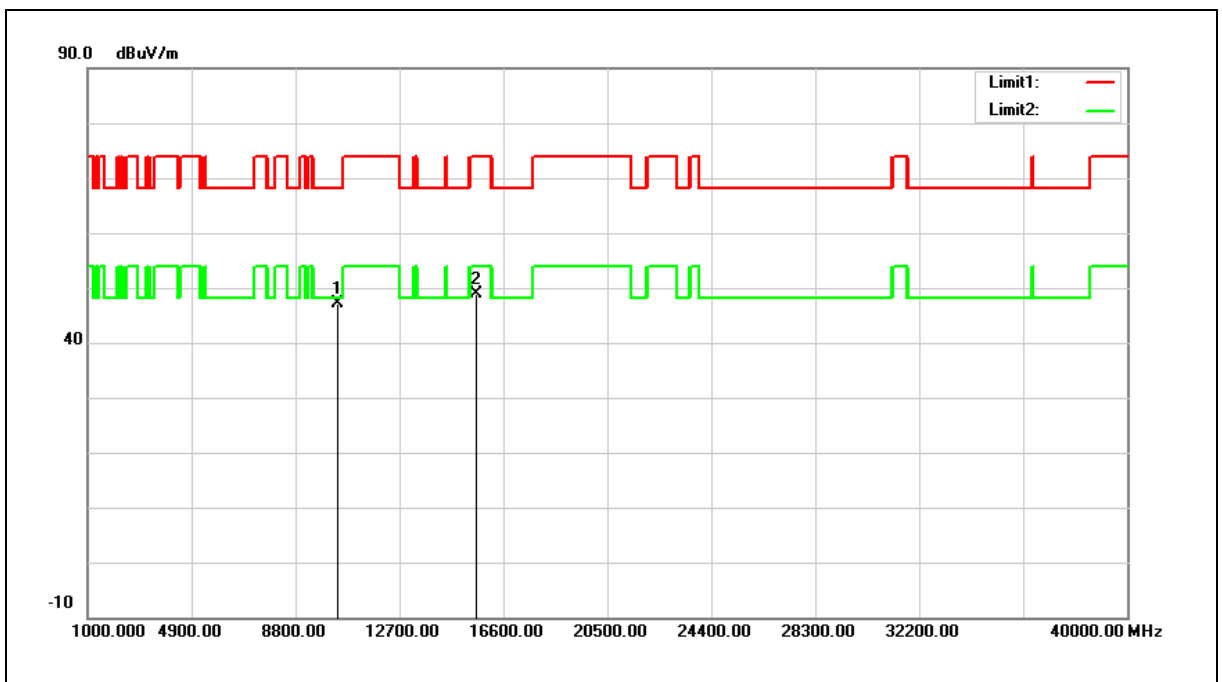


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	35.32	11.79	47.11	68.20	-21.09	peak
2	15600.000	34.58	14.39	48.97	74.00	-25.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

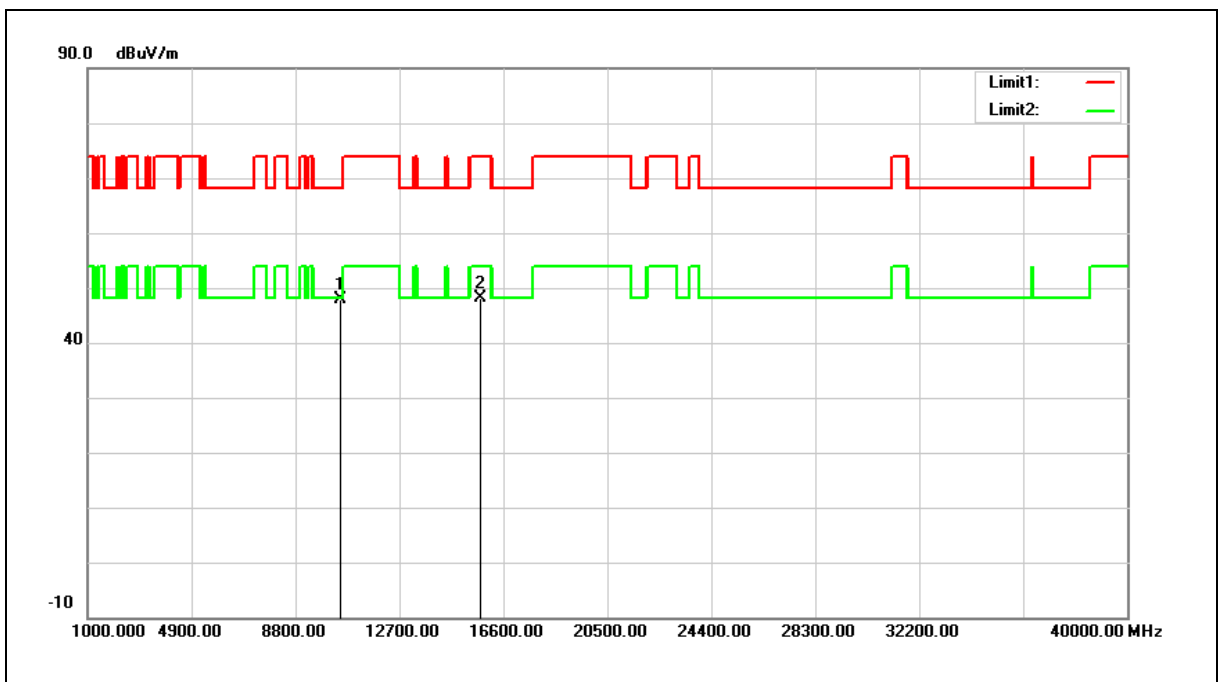


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	35.84	12.00	47.84	68.20	-20.36	peak
2	15720.000	34.02	14.13	48.15	74.00	-25.85	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

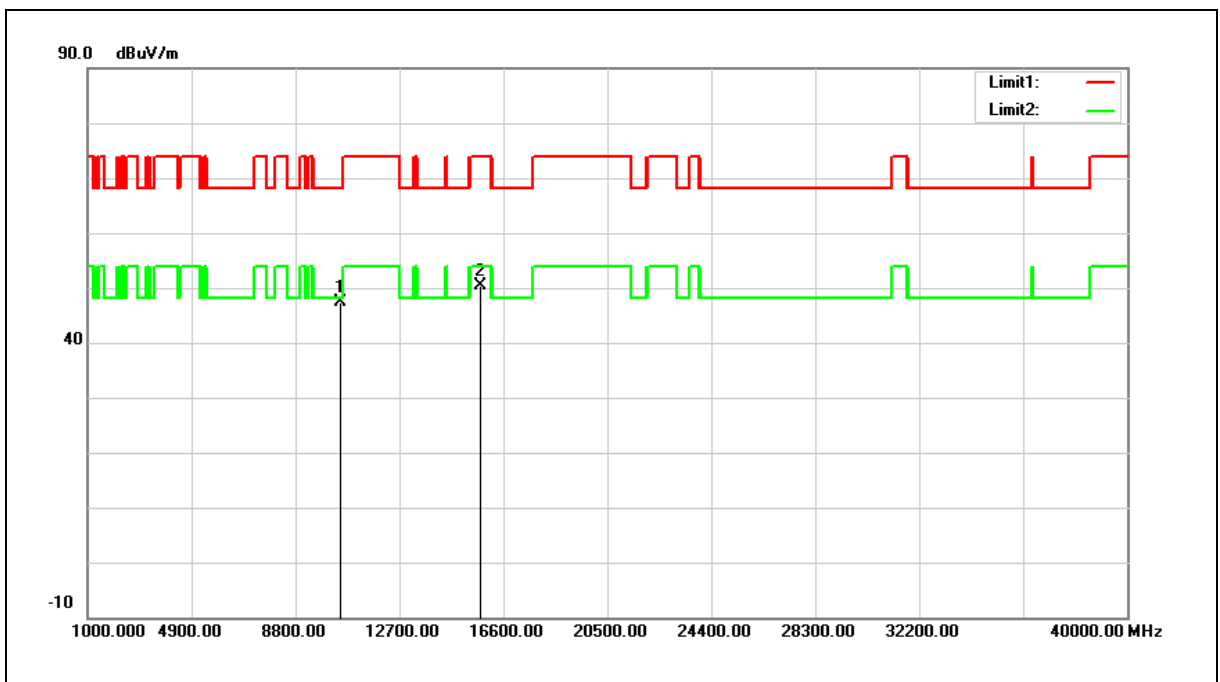


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	35.43	12.00	47.43	68.20	-20.77	peak
2	15720.000	36.37	14.13	50.50	74.00	-23.50	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

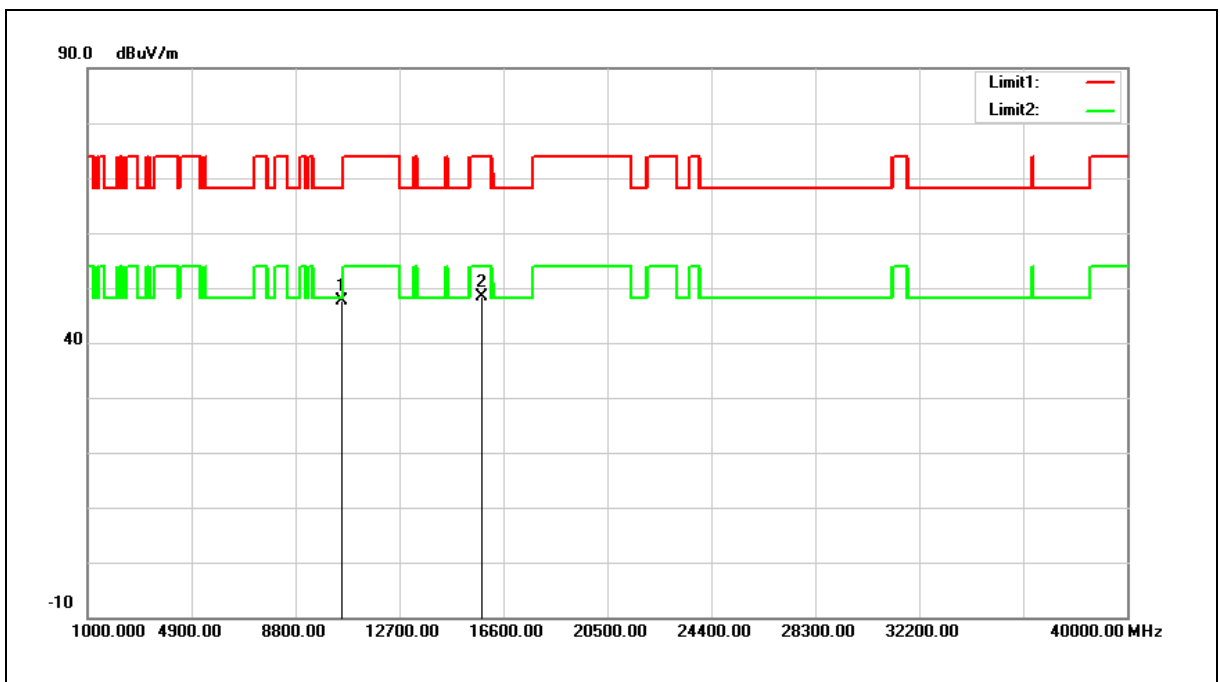


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	35.61	12.06	47.67	68.20	-20.53	peak
2	15780.000	34.28	14.02	48.30	74.00	-25.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

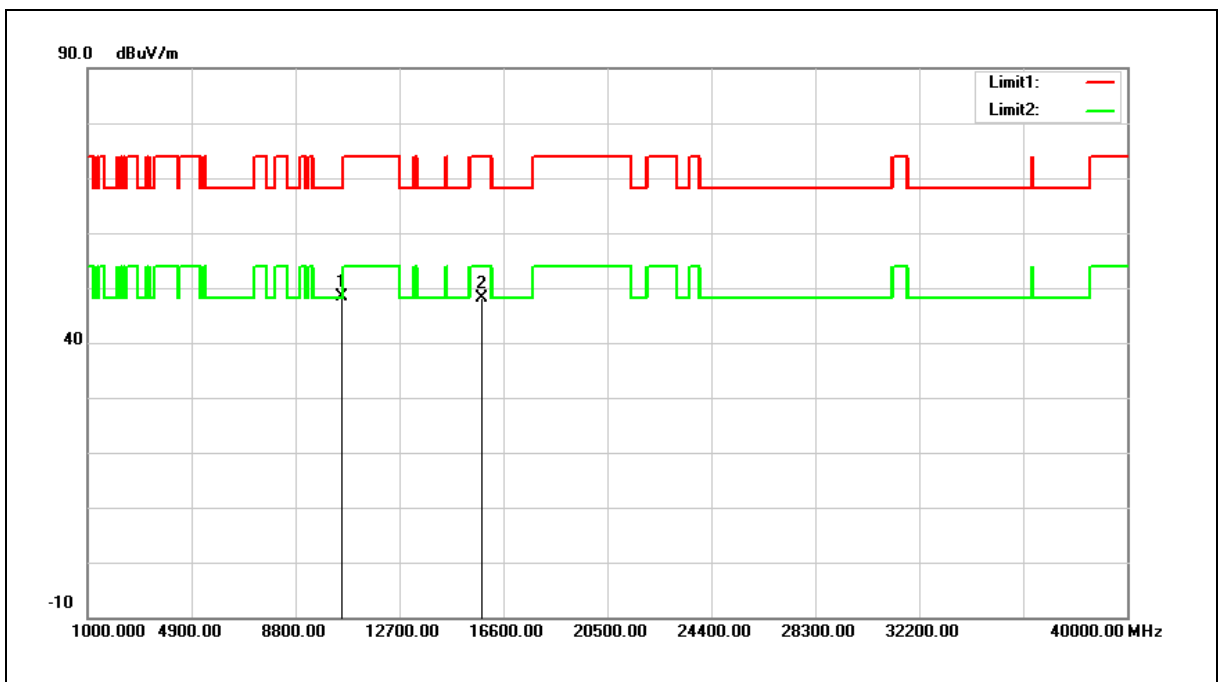


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	36.22	12.06	48.28	68.20	-19.92	peak
2	15780.000	34.03	14.02	48.05	74.00	-25.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

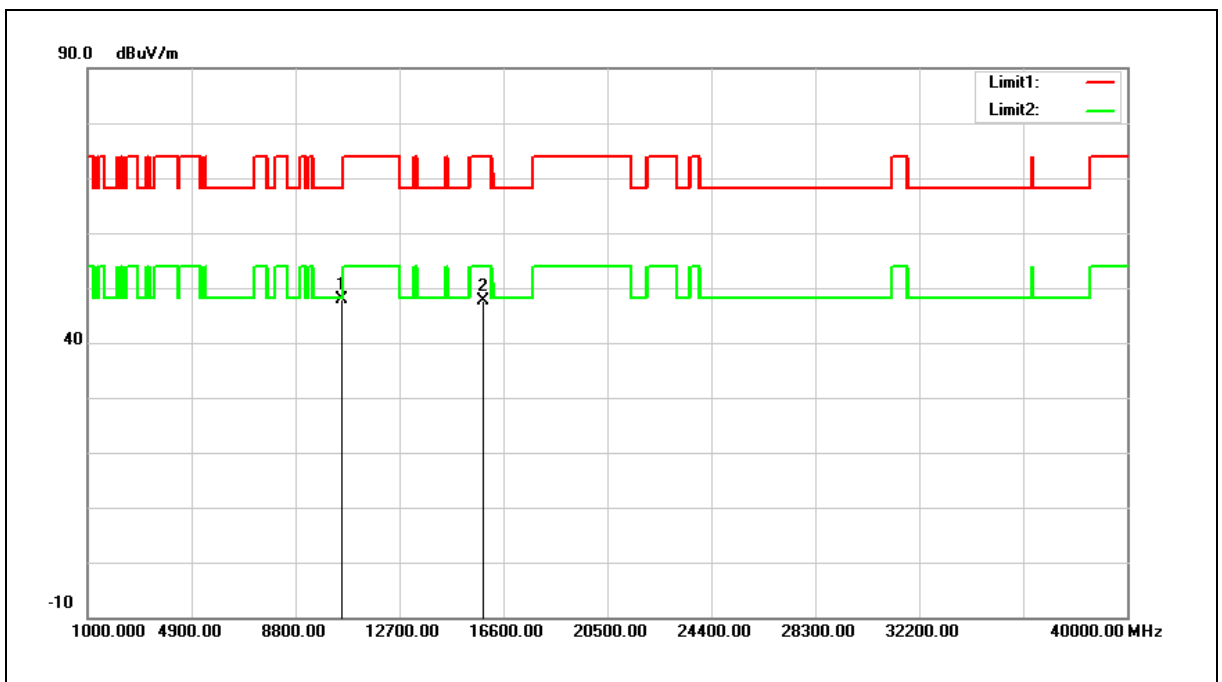


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	35.88	12.09	47.97	68.20	-20.23	peak
2	15840.000	33.73	13.88	47.61	74.00	-26.39	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

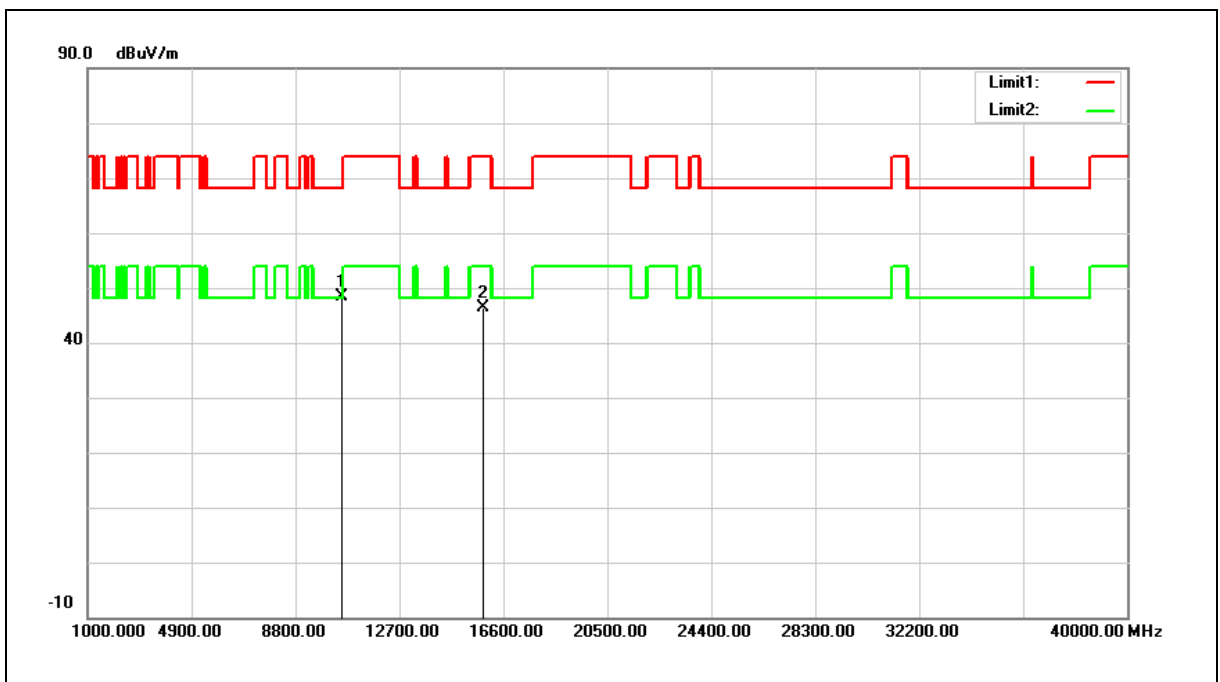


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	36.25	12.09	48.34	68.20	-19.86	peak
2	15840.000	32.56	13.88	46.44	74.00	-27.56	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

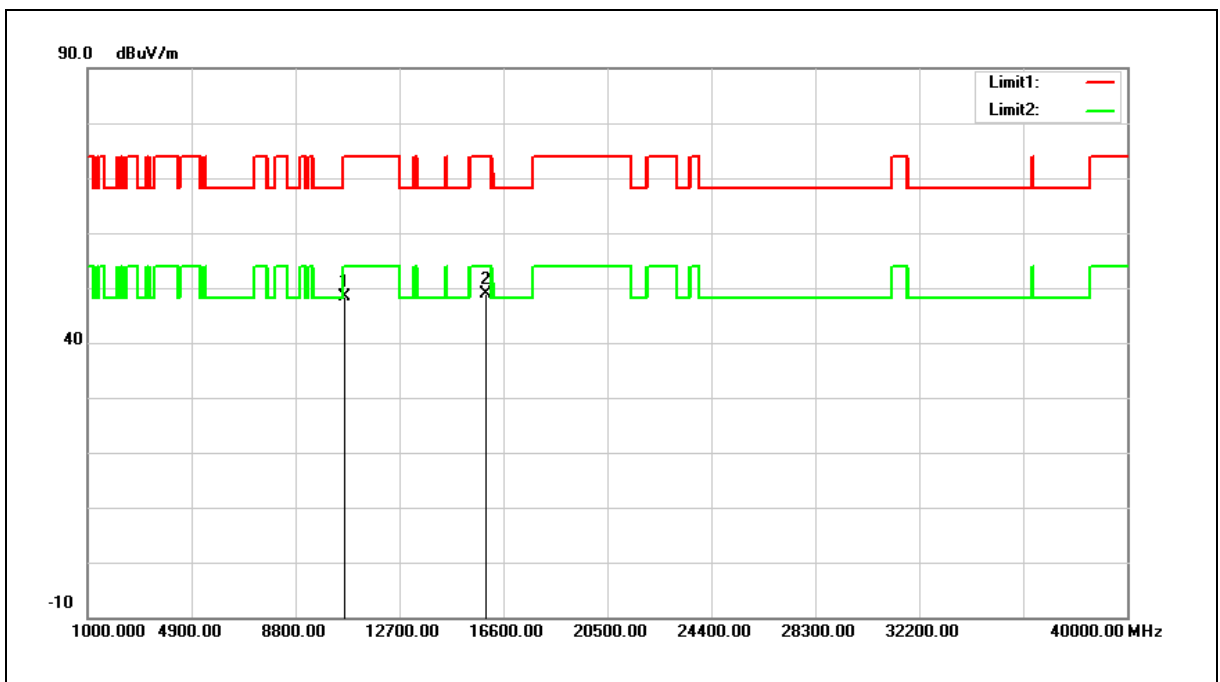


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	36.19	12.14	48.33	74.00	-25.67	peak
2	15960.000	35.27	13.63	48.90	74.00	-25.10	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

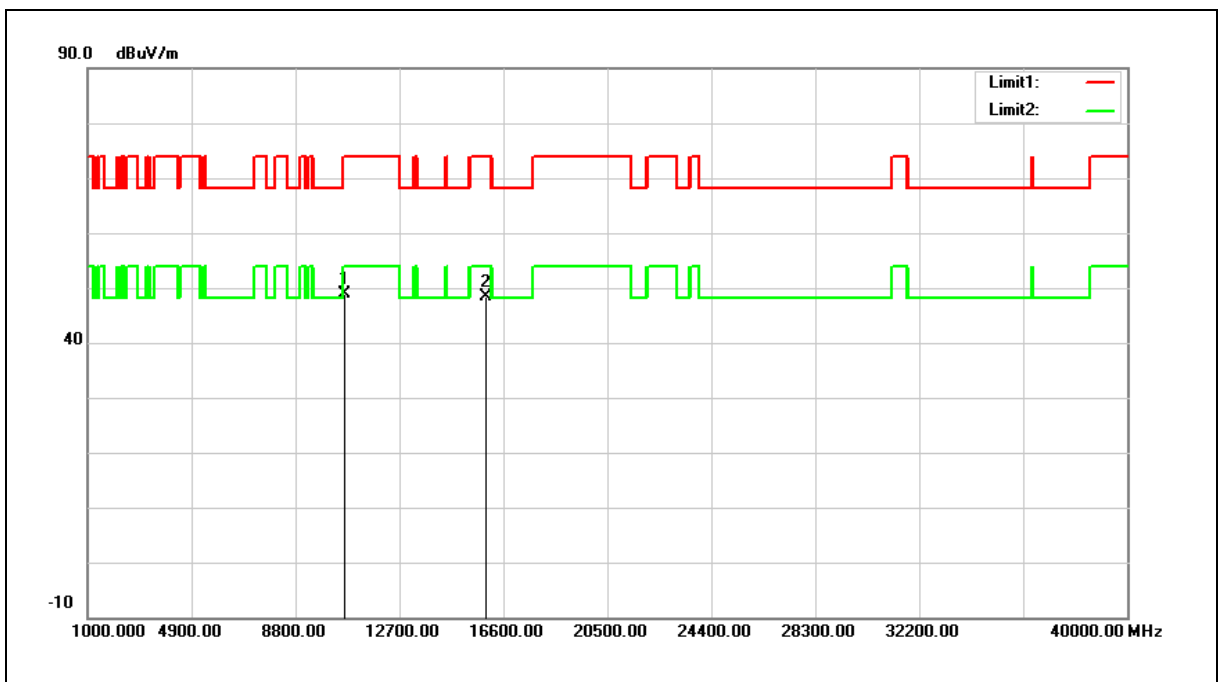


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	36.81	12.14	48.95	74.00	-25.05	peak
2	15960.000	34.85	13.63	48.48	74.00	-25.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

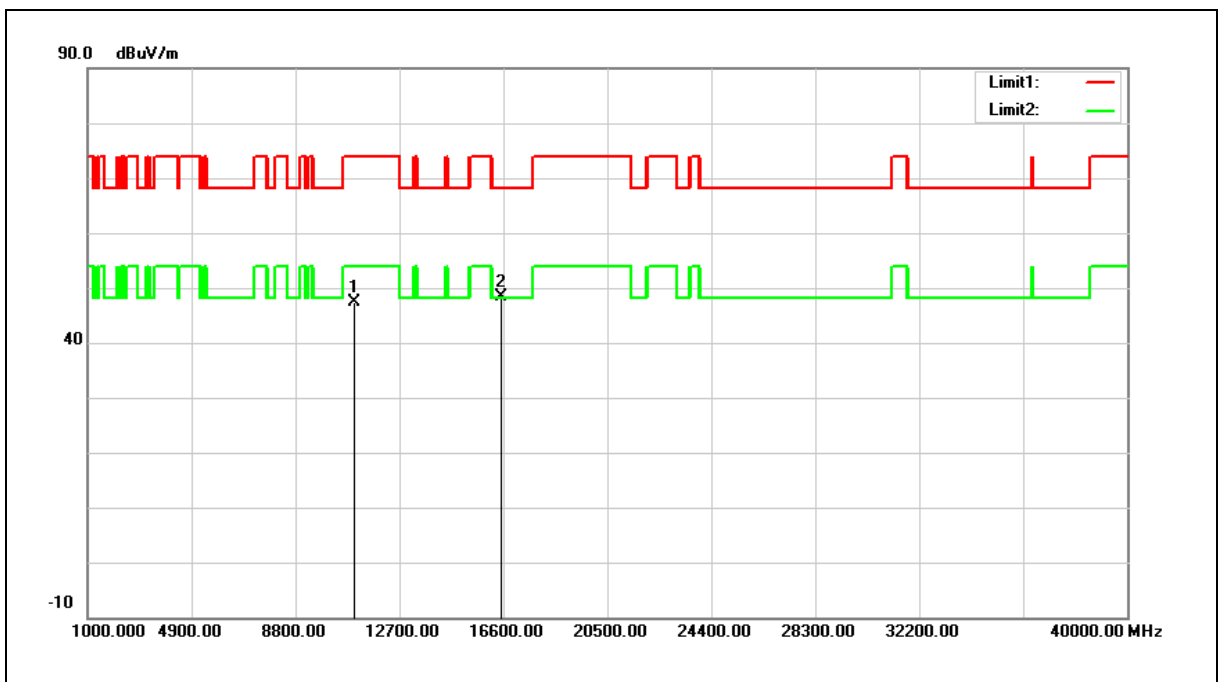


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.95	12.39	47.34	74.00	-26.66	peak
2	16500.000	34.03	14.24	48.27	68.20	-19.93	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

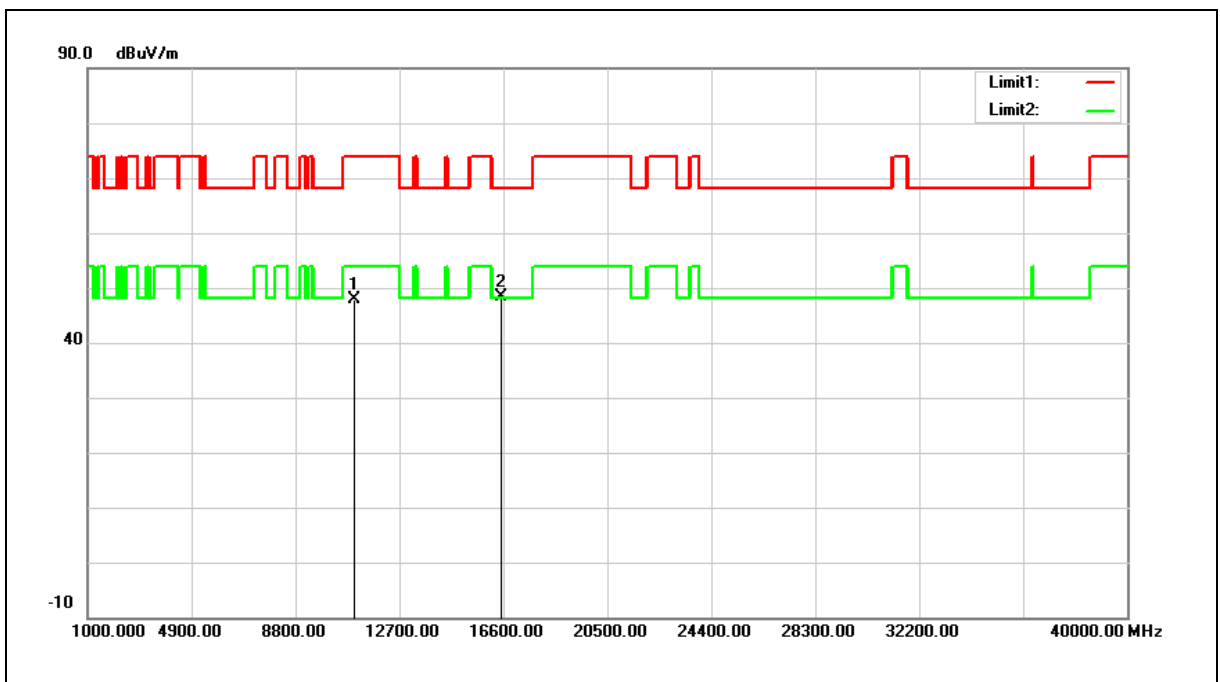


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	35.58	12.39	47.97	74.00	-26.03	peak
2	16500.000	34.14	14.24	48.38	68.20	-19.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

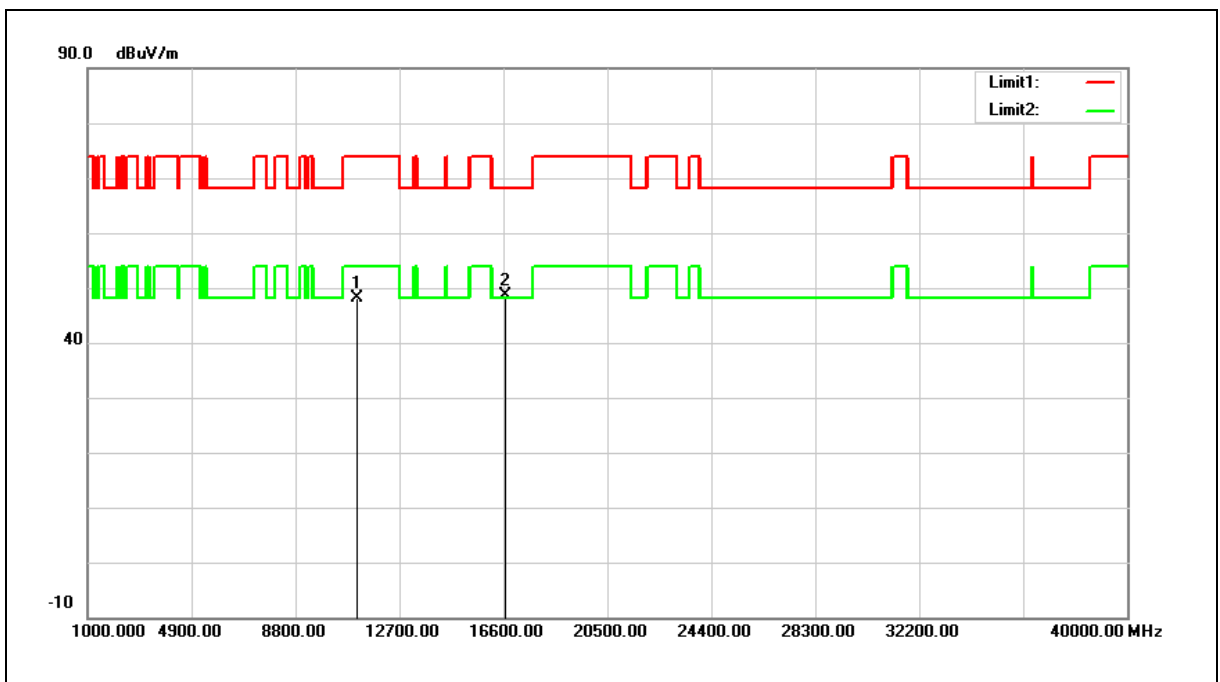


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	35.56	12.46	48.02	74.00	-25.98	peak
2	16680.000	33.43	15.22	48.65	68.20	-19.55	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

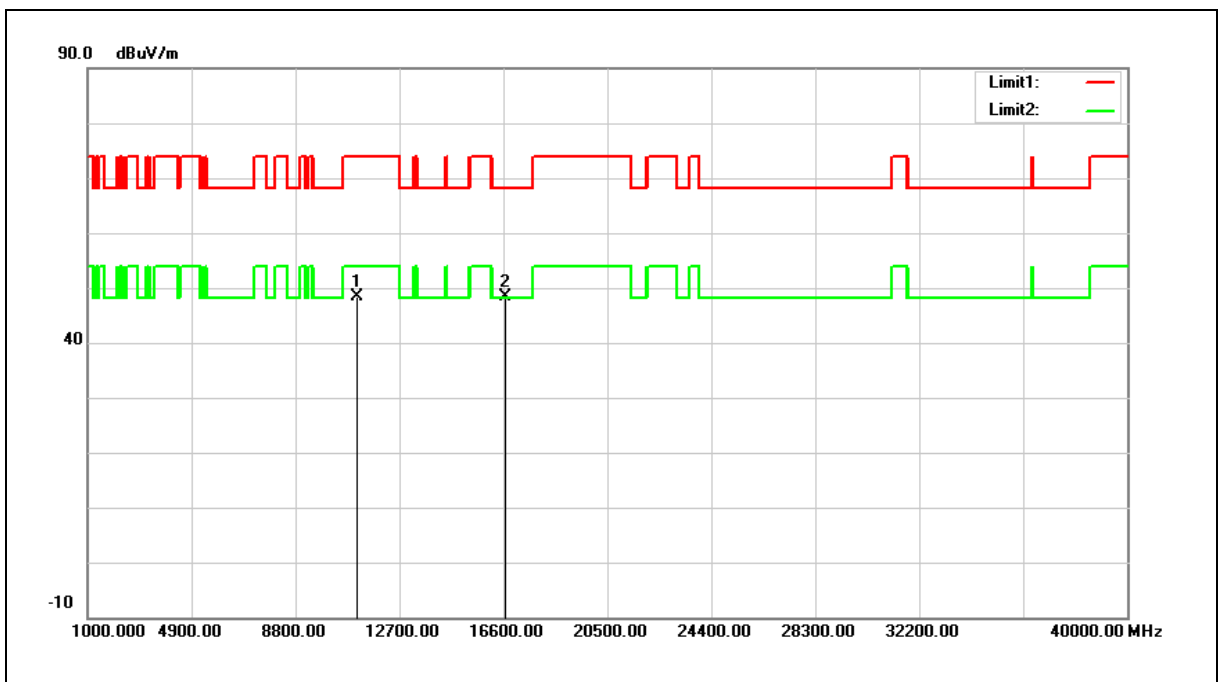


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	35.95	12.46	48.41	74.00	-25.59	peak
2	16680.000	33.27	15.22	48.49	68.20	-19.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

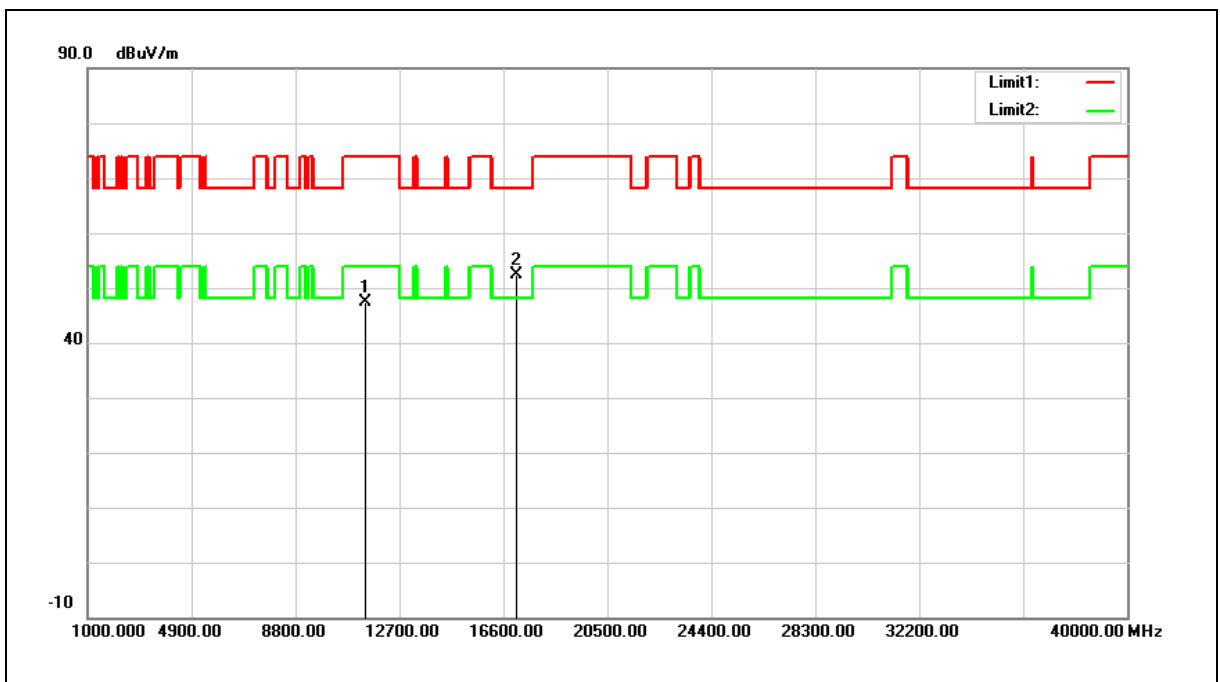


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	34.85	12.63	47.48	74.00	-26.52	peak
2	17100.000	34.68	17.63	52.31	68.20	-15.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

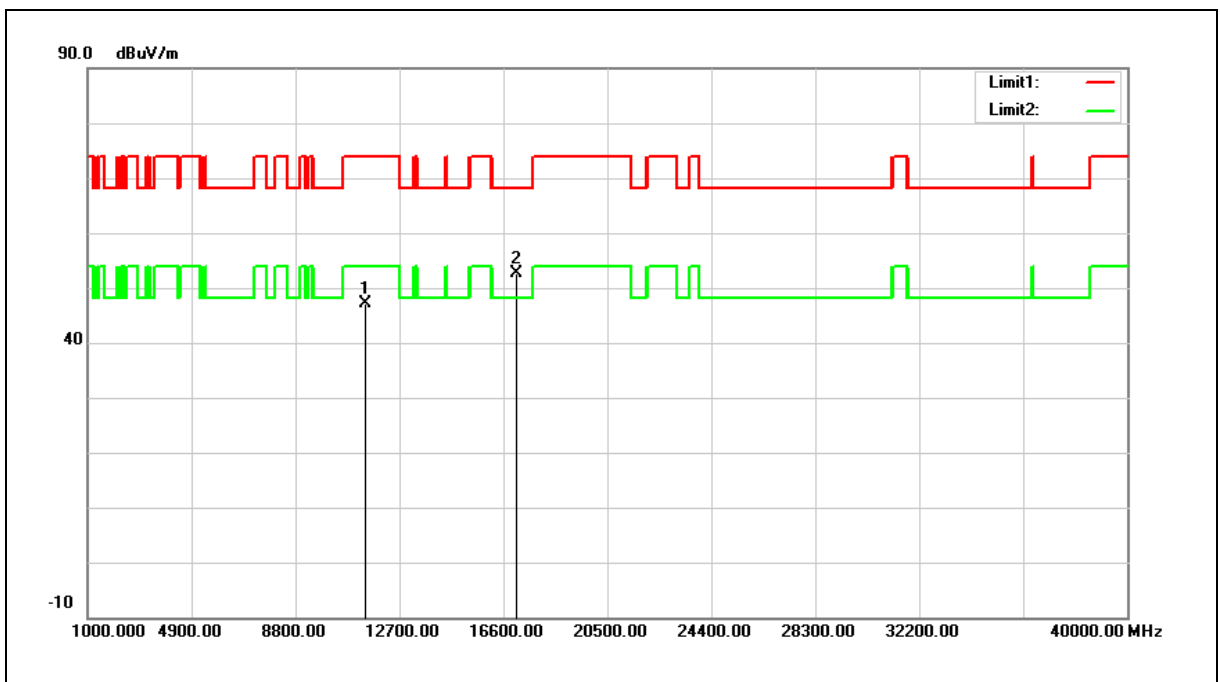


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	34.43	12.63	47.06	74.00	-26.94	peak
2	17100.000	34.95	17.63	52.58	68.20	-15.62	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

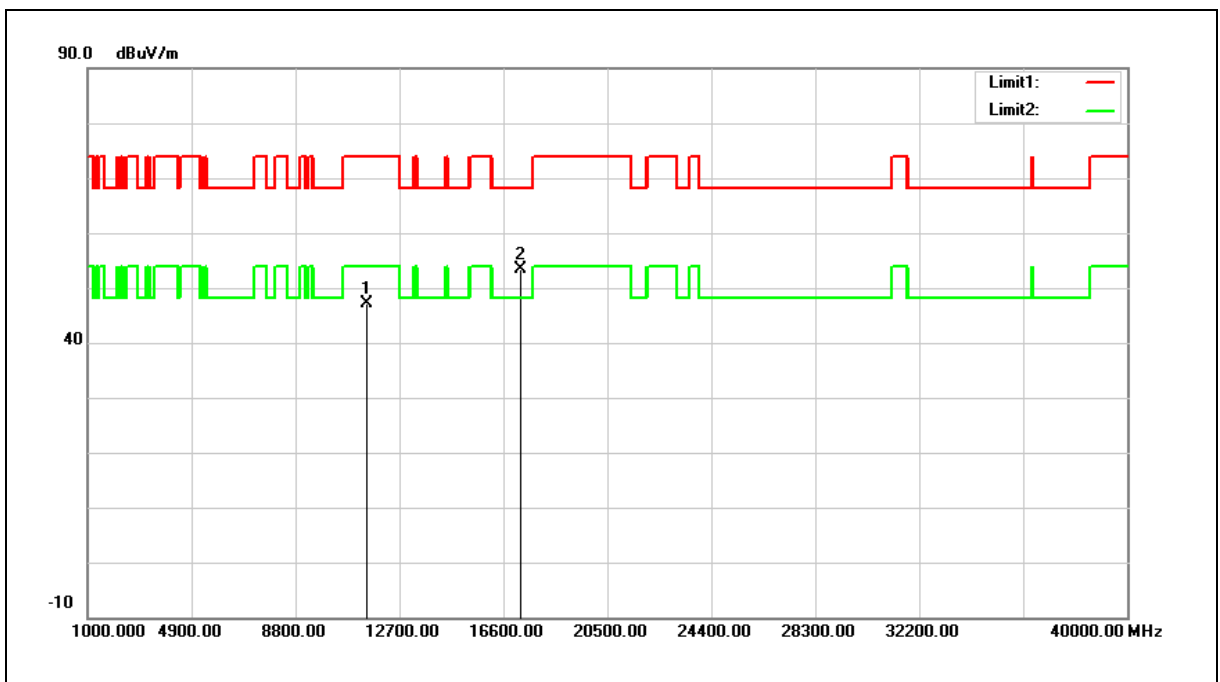


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	34.57	12.68	47.25	74.00	-26.75	peak
2	17235.000	34.75	18.52	53.27	68.20	-14.93	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

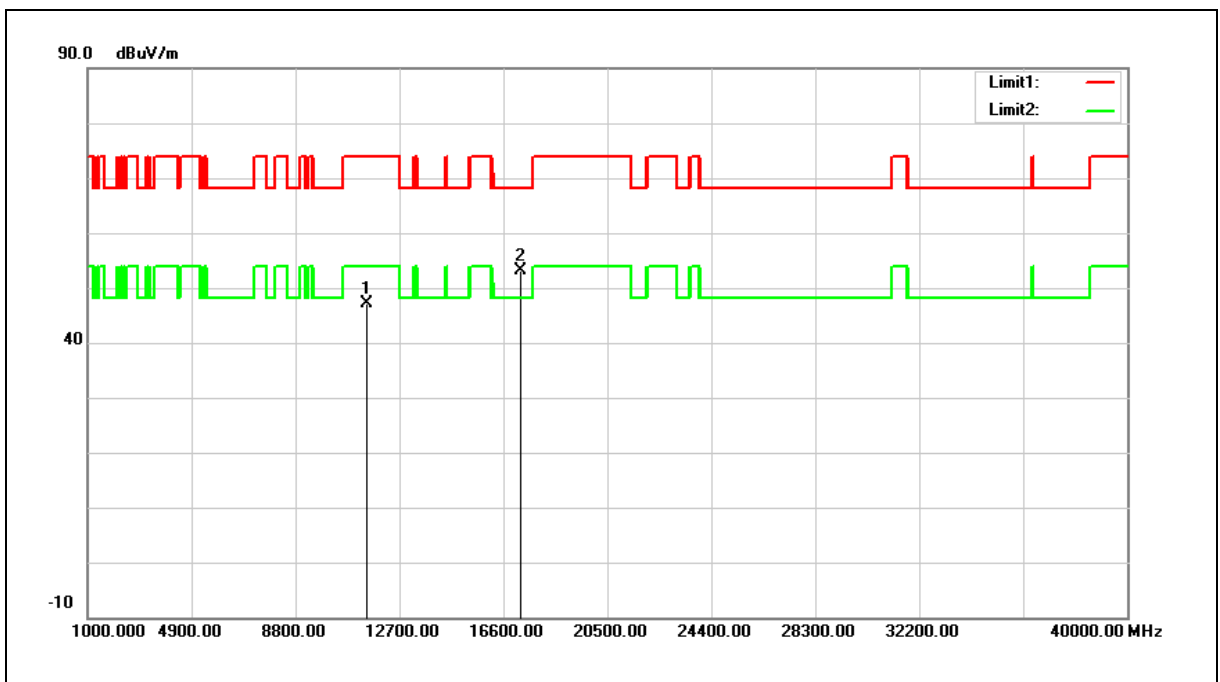


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	34.47	12.68	47.15	74.00	-26.85	peak
2	17235.000	34.56	18.52	53.08	68.20	-15.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

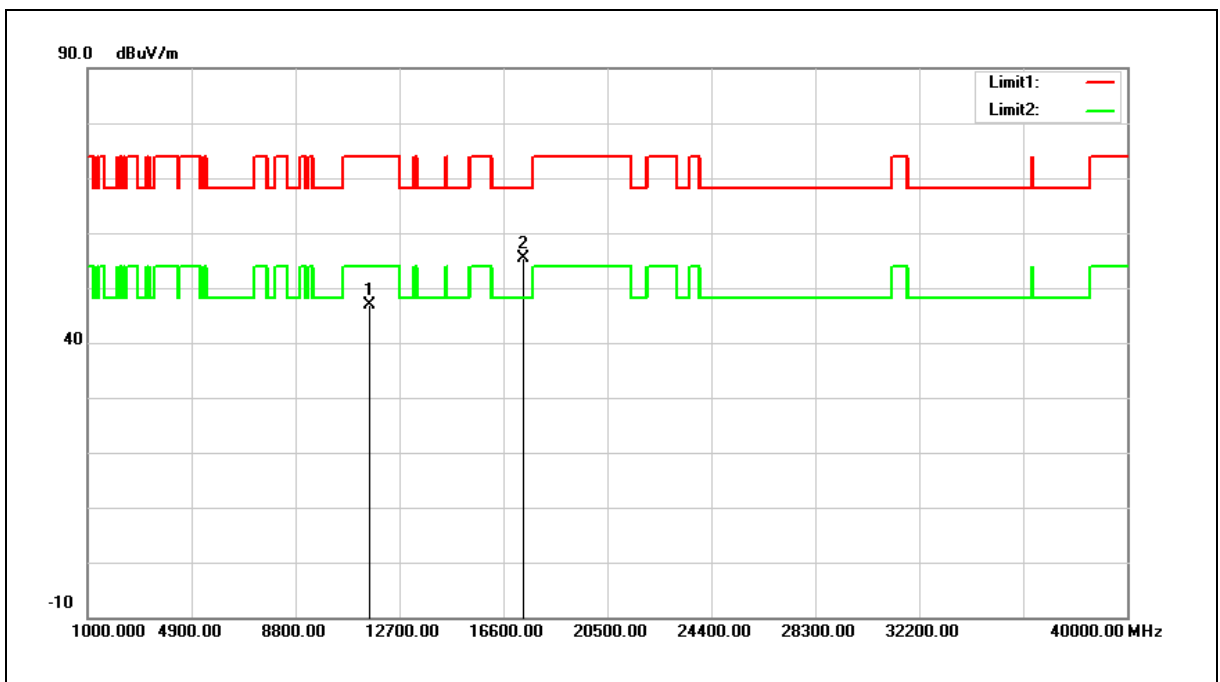


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	34.38	12.59	46.97	74.00	-27.03	peak
2	17355.000	36.08	19.32	55.40	68.20	-12.80	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

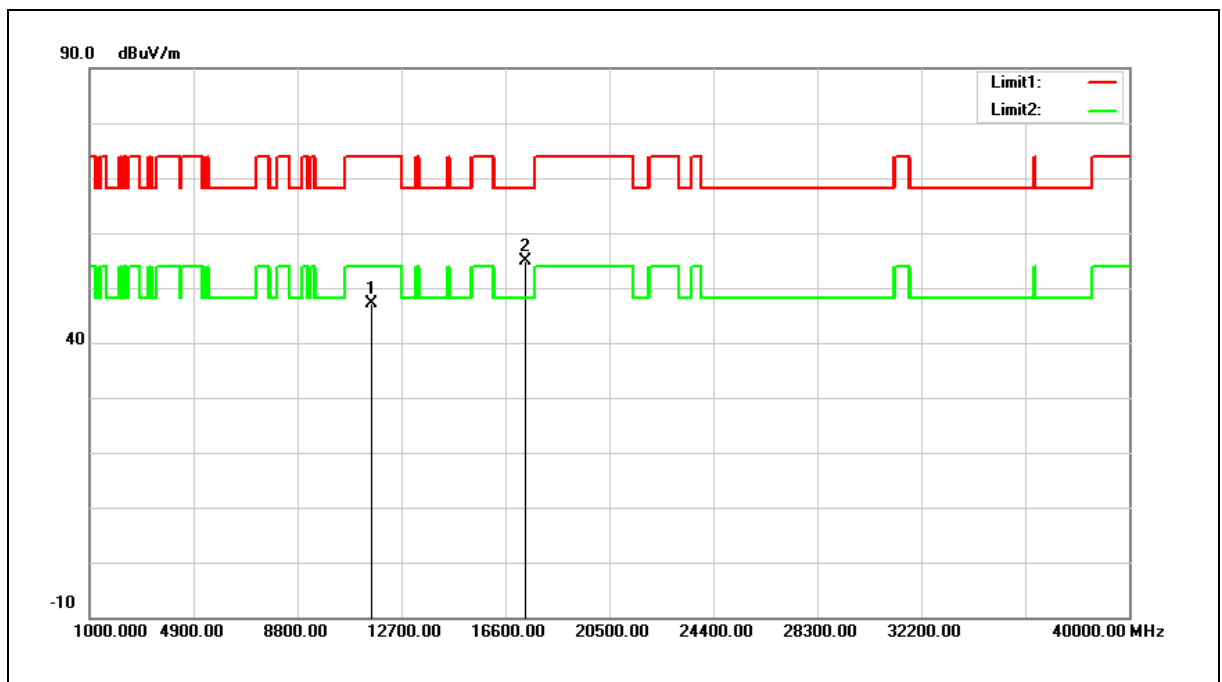


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	34.50	12.59	47.09	74.00	-26.91	peak
2	17355.000	35.48	19.32	54.80	68.20	-13.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

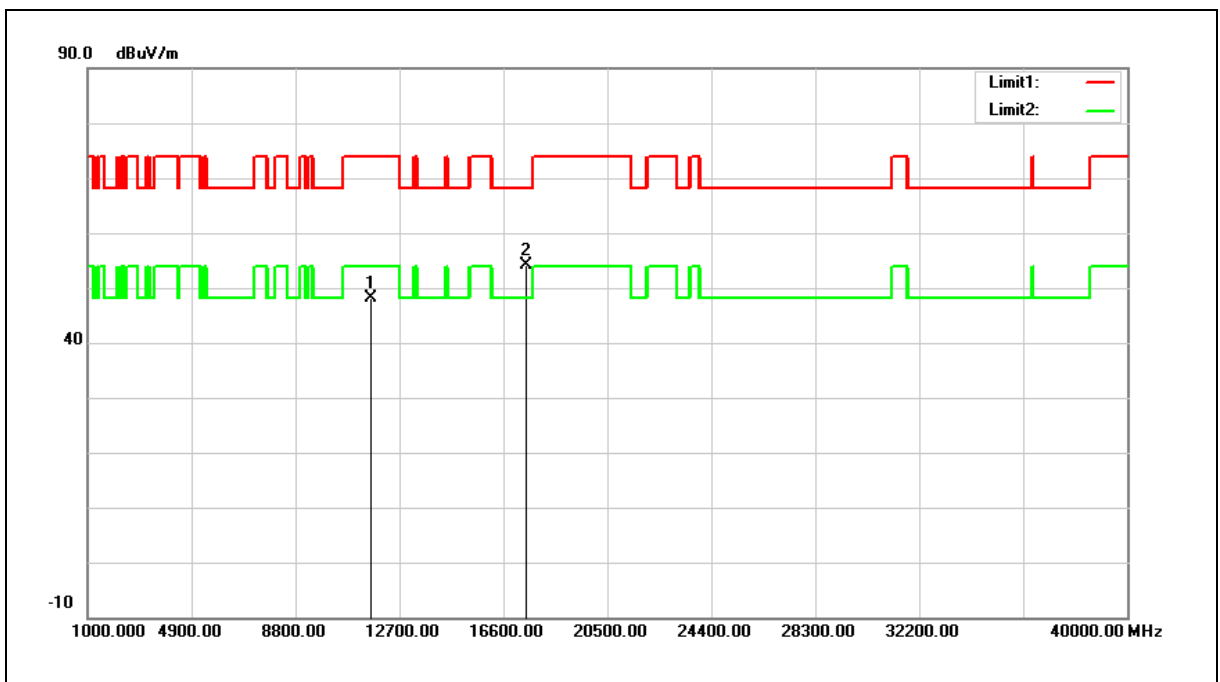


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.68	12.48	48.16	74.00	-25.84	peak
2	17475.000	34.04	20.13	54.17	68.20	-14.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

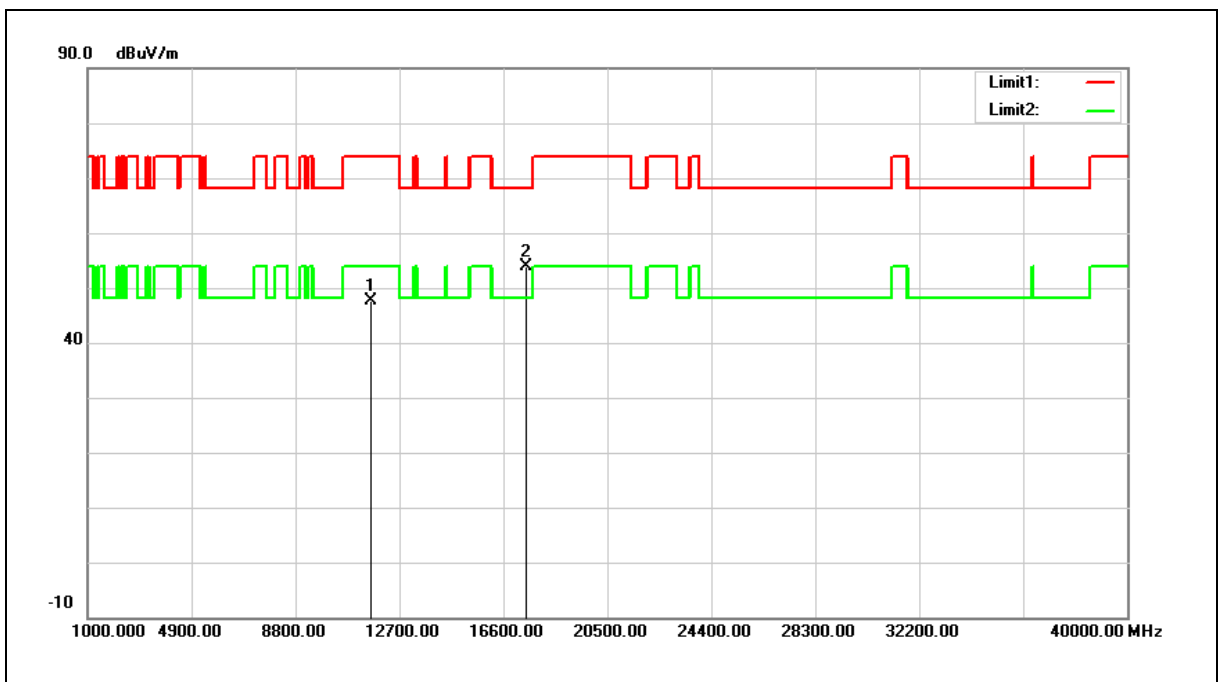


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.20	12.48	47.68	74.00	-26.32	peak
2	17475.000	33.80	20.13	53.93	68.20	-14.27	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

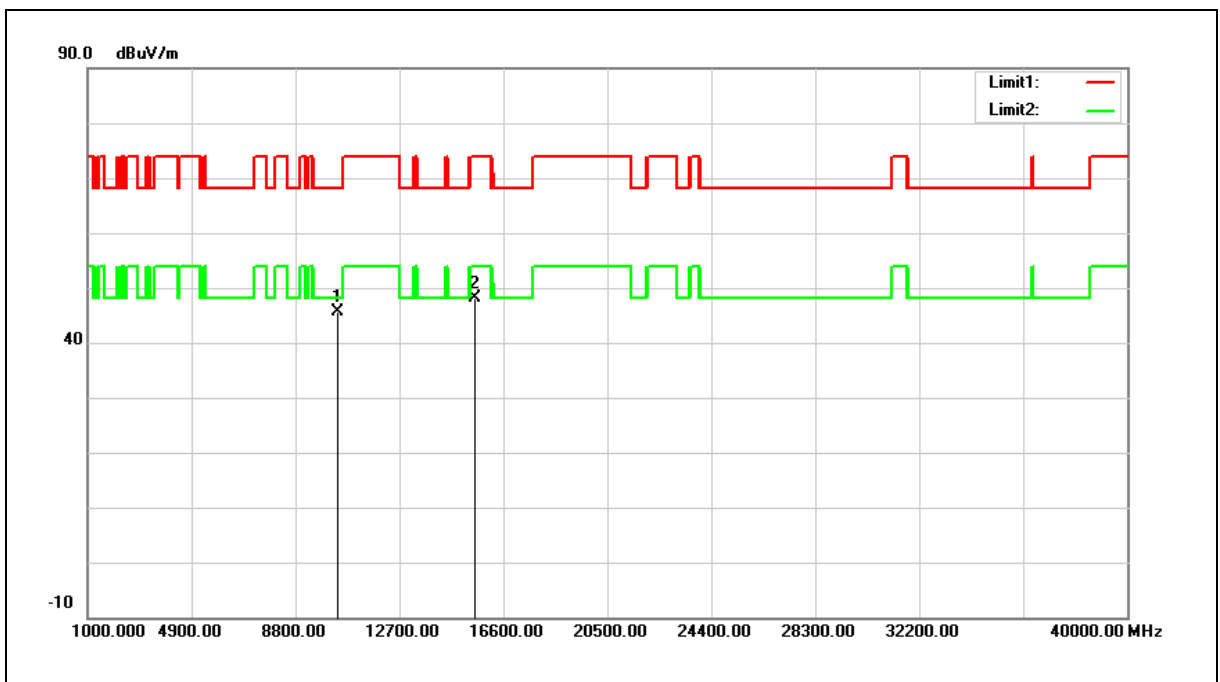


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	34.06	11.69	45.75	68.20	-22.45	peak
2	15540.000	33.73	14.52	48.25	74.00	-25.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

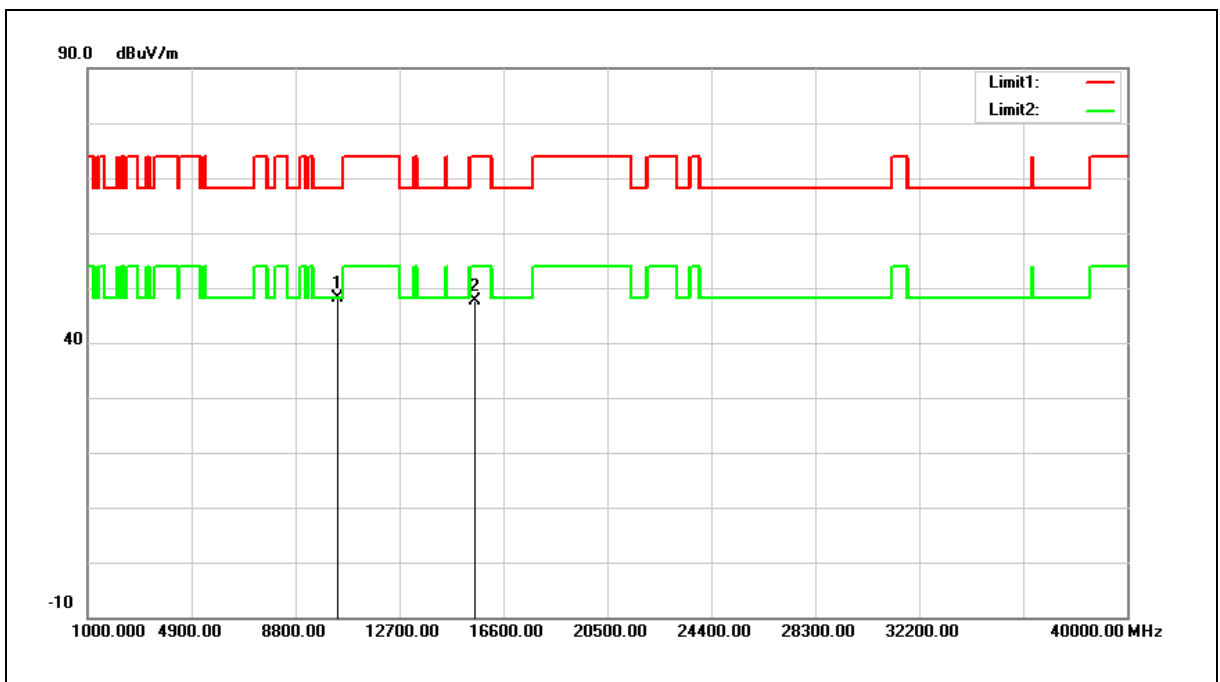


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	36.35	11.69	48.04	68.20	-20.16	peak
2	15540.000	33.21	14.52	47.73	74.00	-26.27	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

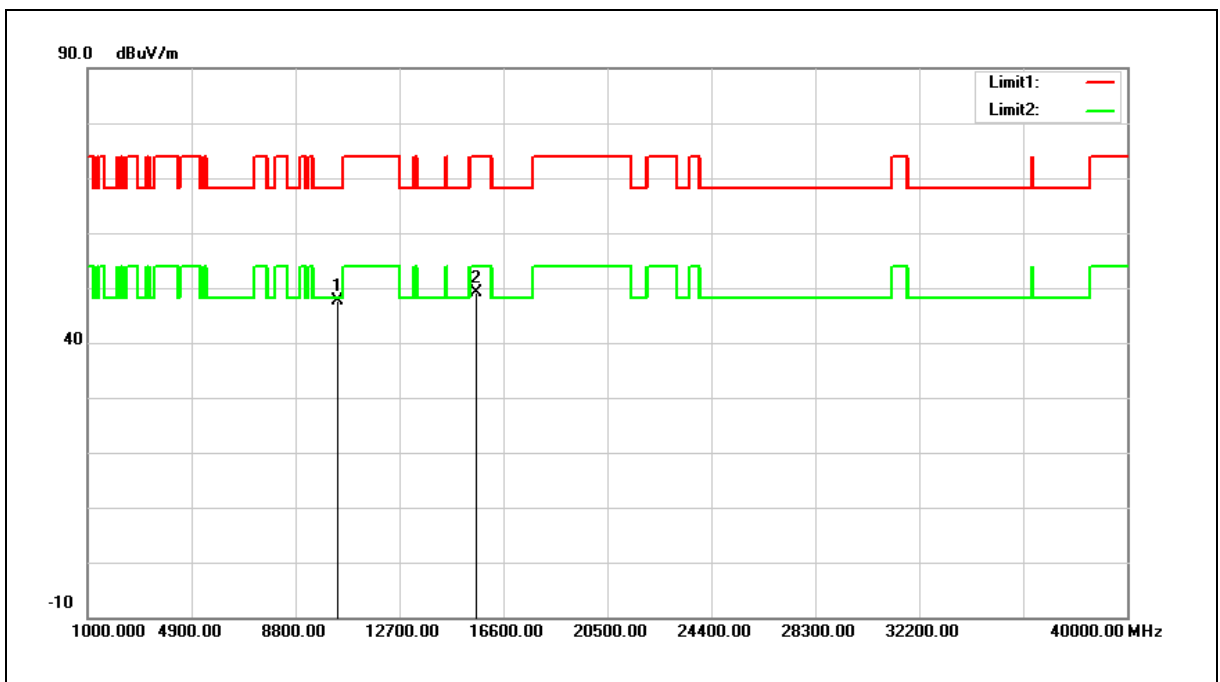


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	35.73	11.79	47.52	68.20	-20.68	peak
2	15600.000	34.77	14.39	49.16	74.00	-24.84	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

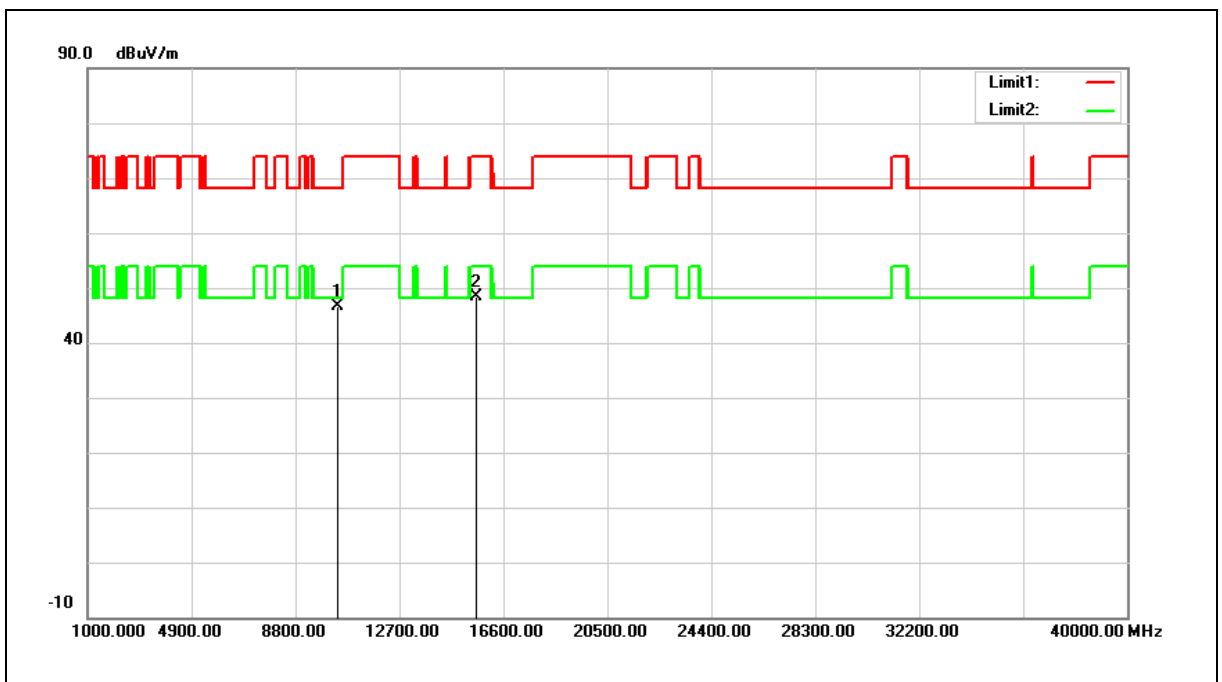


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	34.89	11.79	46.68	68.20	-21.52	peak
2	15600.000	33.94	14.39	48.33	74.00	-25.67	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

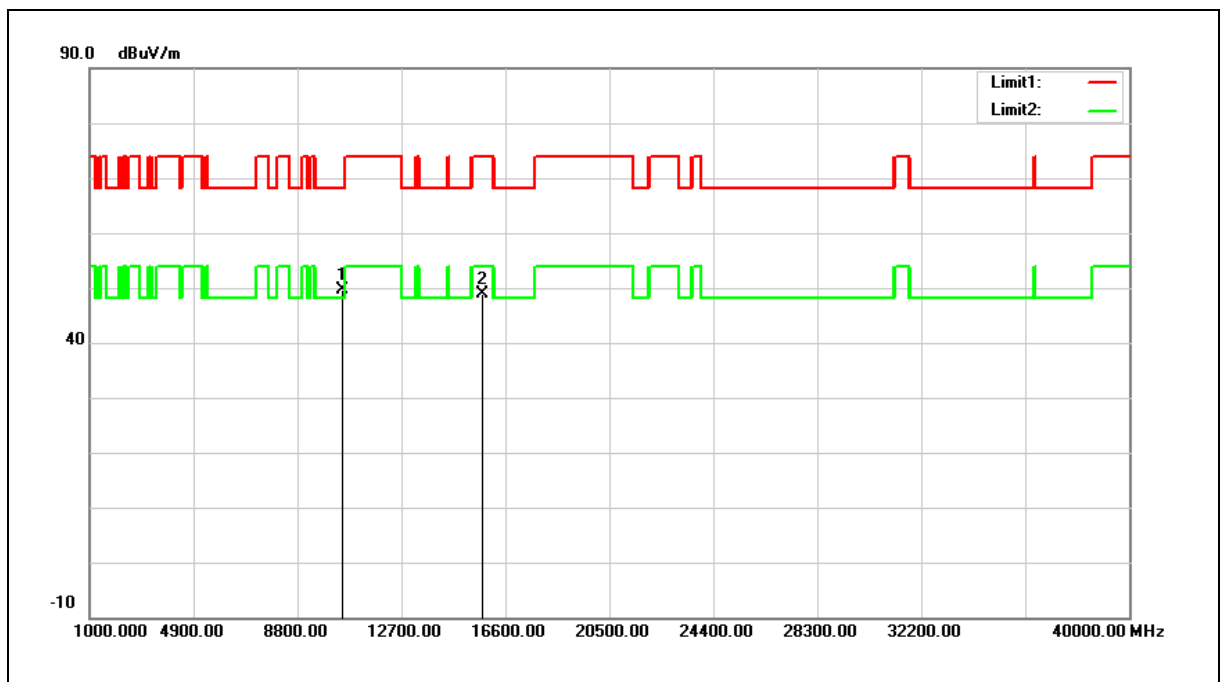


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	37.60	12.00	49.60	68.20	-18.60	peak
2	15720.000	34.77	14.13	48.90	74.00	-25.10	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

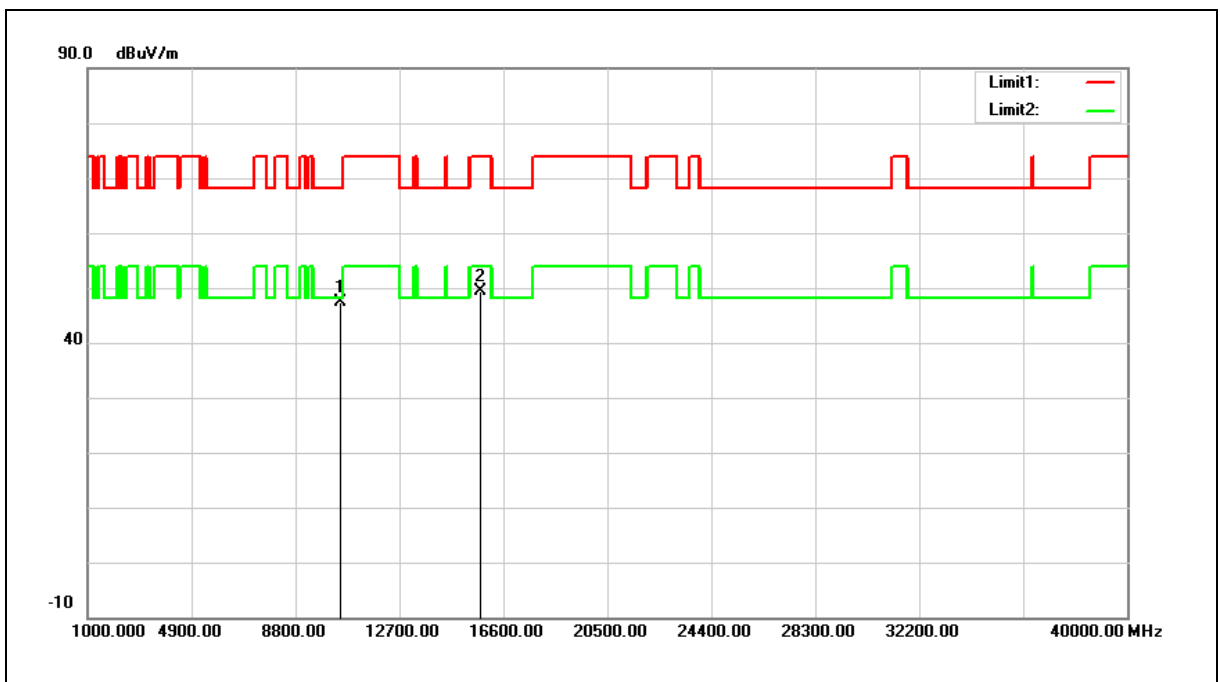


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	35.38	12.00	47.38	68.20	-20.82	peak
2	15720.000	35.15	14.13	49.28	74.00	-24.72	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

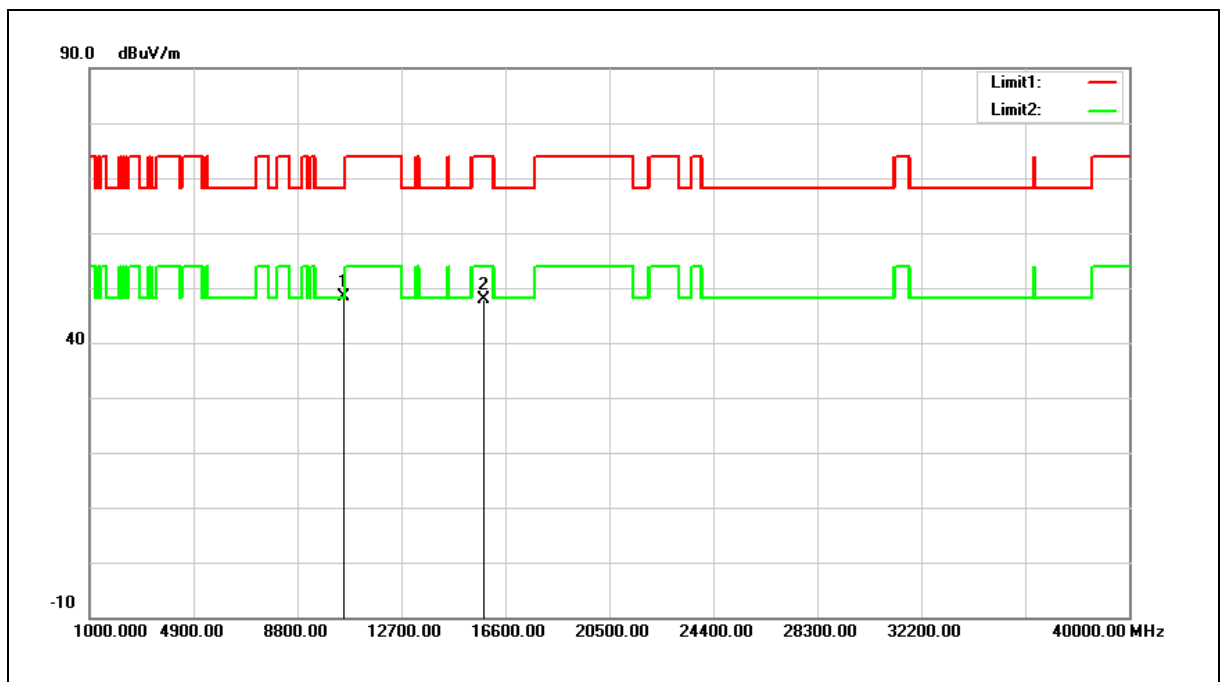


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	36.20	12.06	48.26	68.20	-19.94	peak
2	15780.000	33.87	14.02	47.89	74.00	-26.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

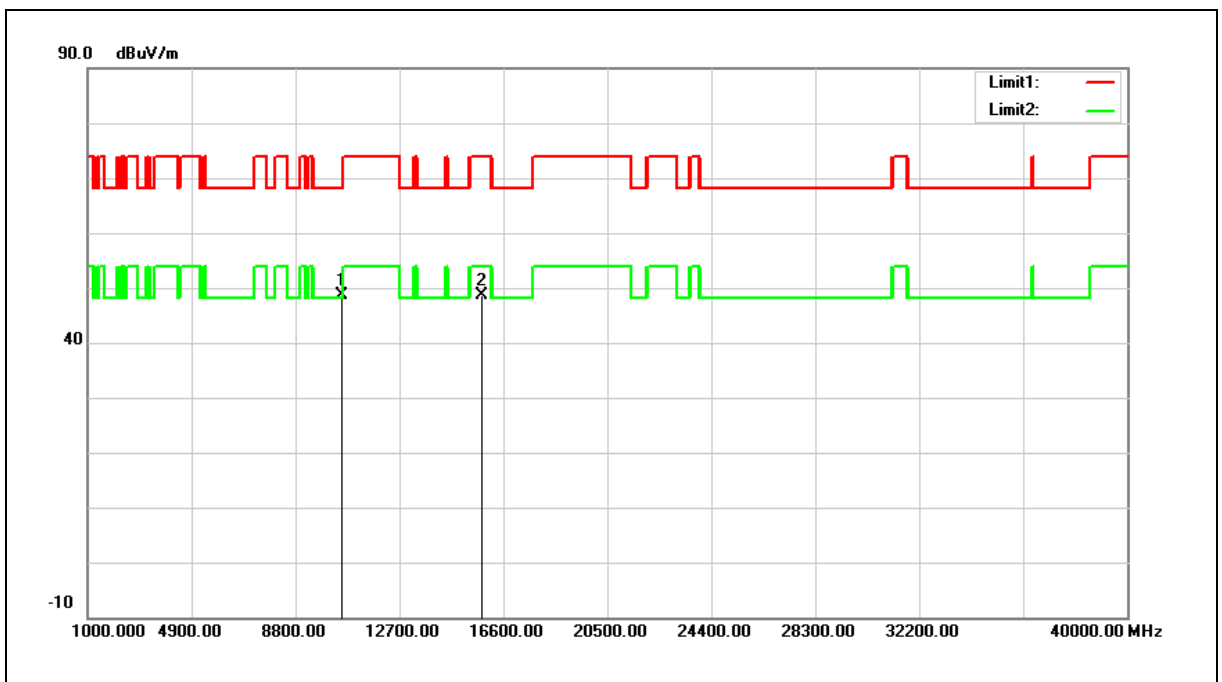


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	36.52	12.06	48.58	68.20	-19.62	peak
2	15780.000	34.55	14.02	48.57	74.00	-25.43	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

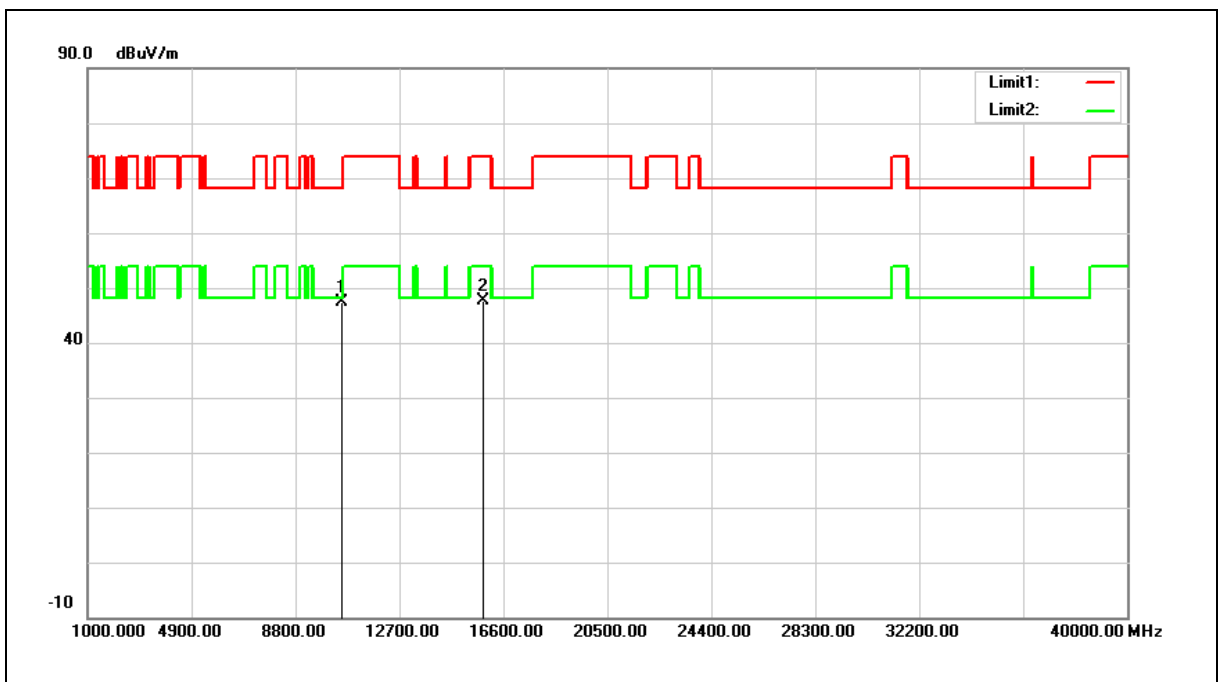


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	35.34	12.09	47.43	68.20	-20.77	peak
2	15840.000	33.86	13.88	47.74	74.00	-26.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

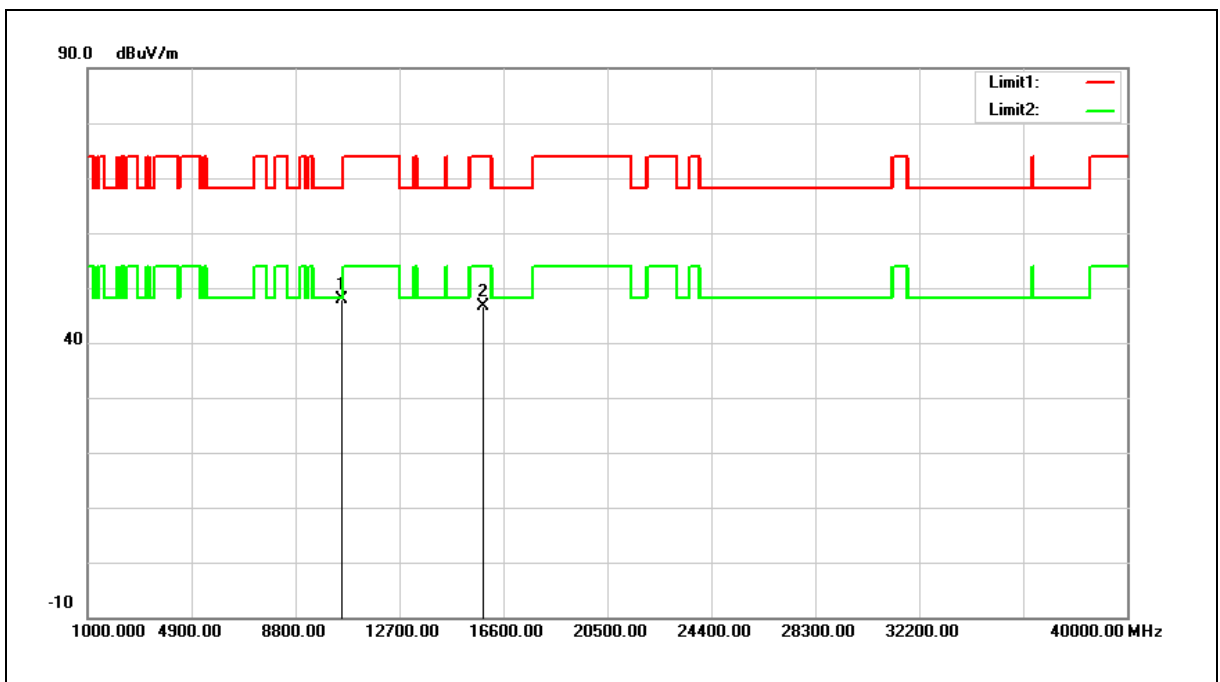


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	35.74	12.09	47.83	68.20	-20.37	peak
2	15840.000	32.86	13.88	46.74	74.00	-27.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

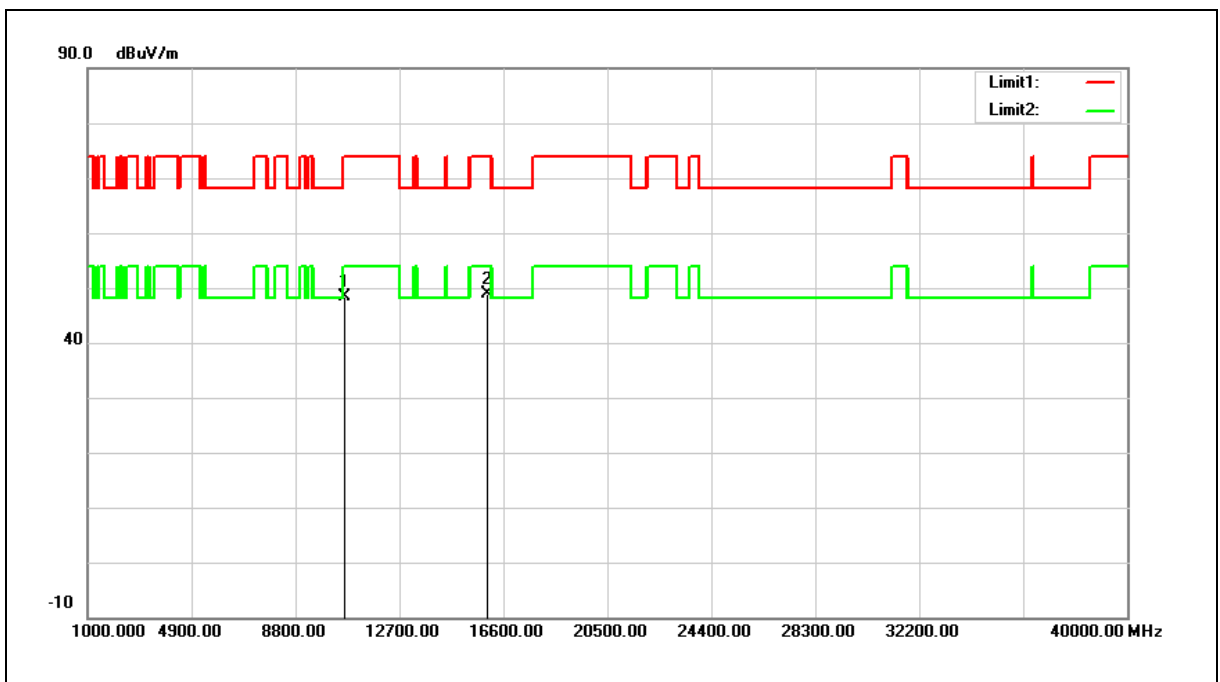


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	36.31	12.14	48.45	74.00	-25.55	peak
2	15960.000	35.34	13.63	48.97	74.00	-25.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

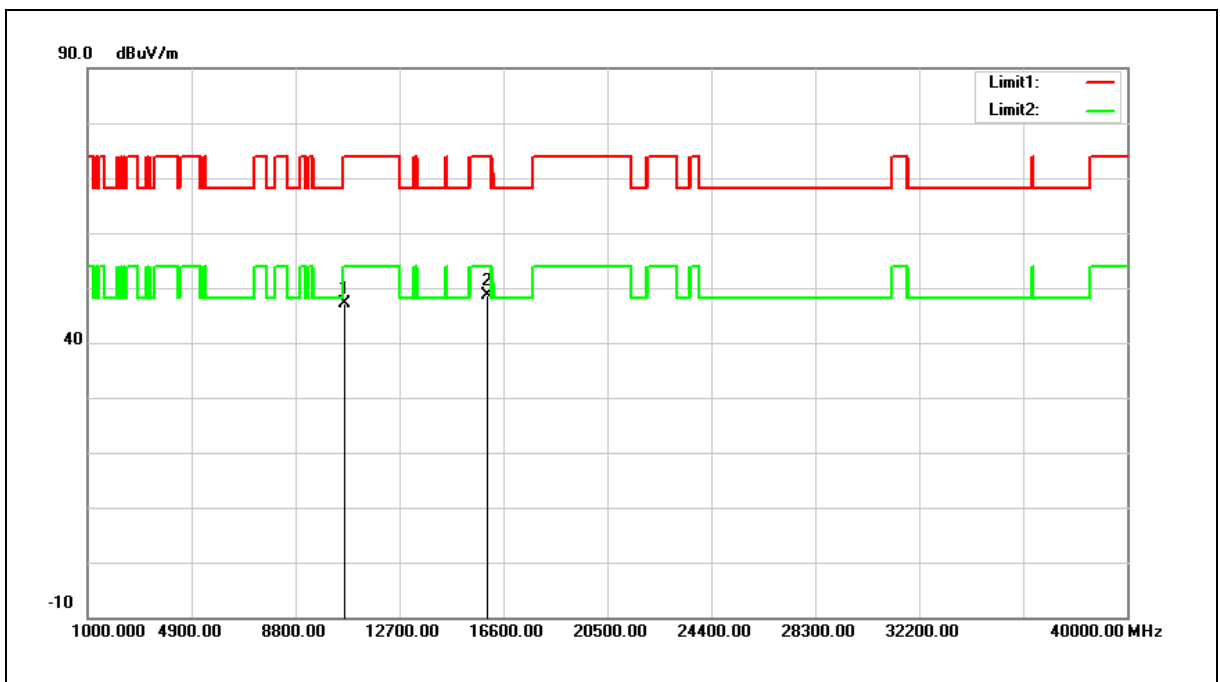


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	35.10	12.14	47.24	74.00	-26.76	peak
2	15960.000	34.89	13.63	48.52	74.00	-25.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

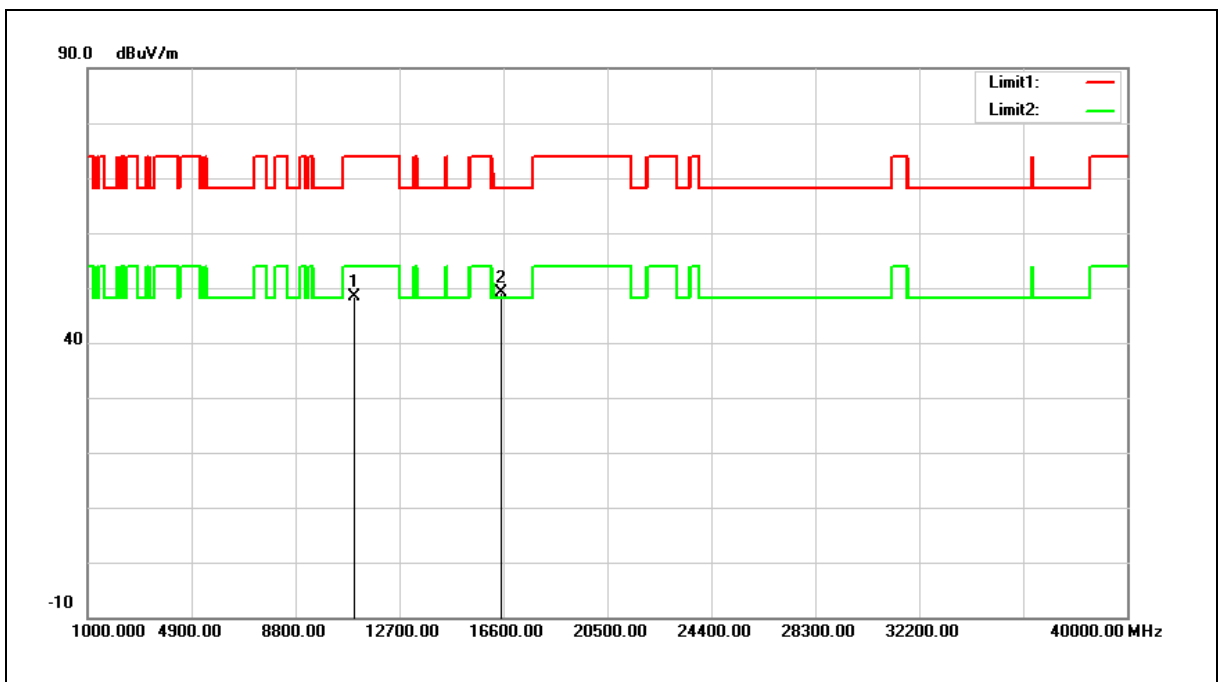


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	35.94	12.39	48.33	74.00	-25.67	peak
2	16500.000	35.01	14.24	49.25	68.20	-18.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

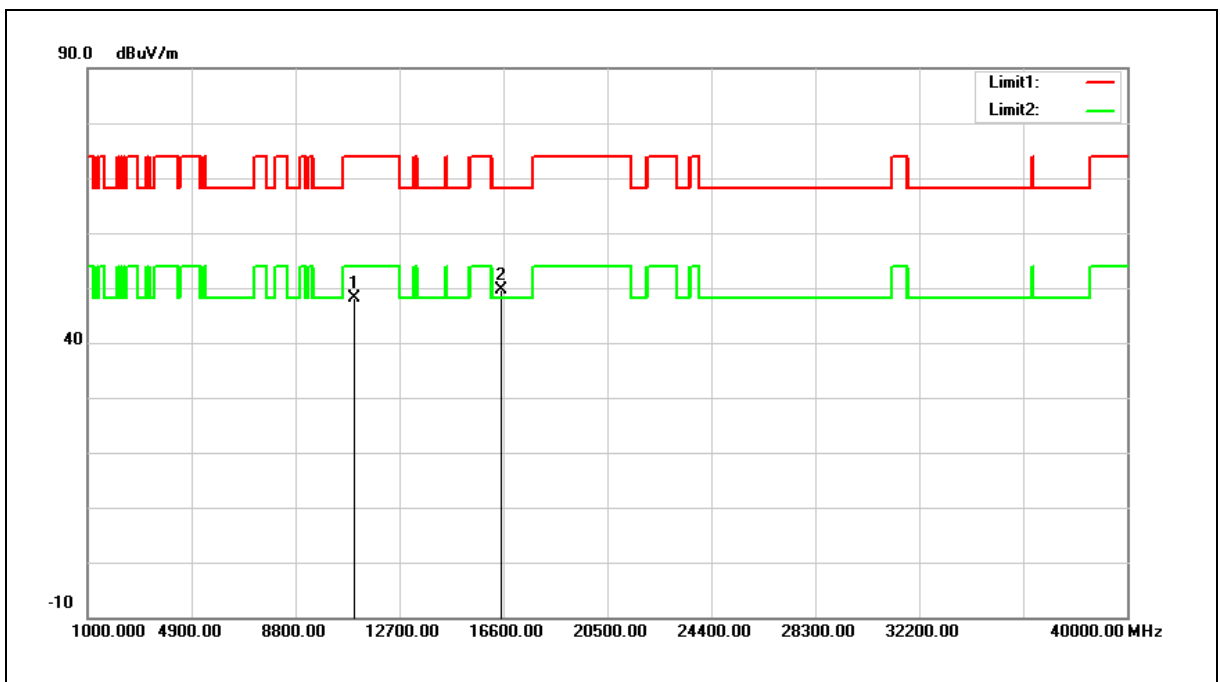


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	35.77	12.39	48.16	74.00	-25.84	peak
2	16500.000	35.31	14.24	49.55	68.20	-18.65	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

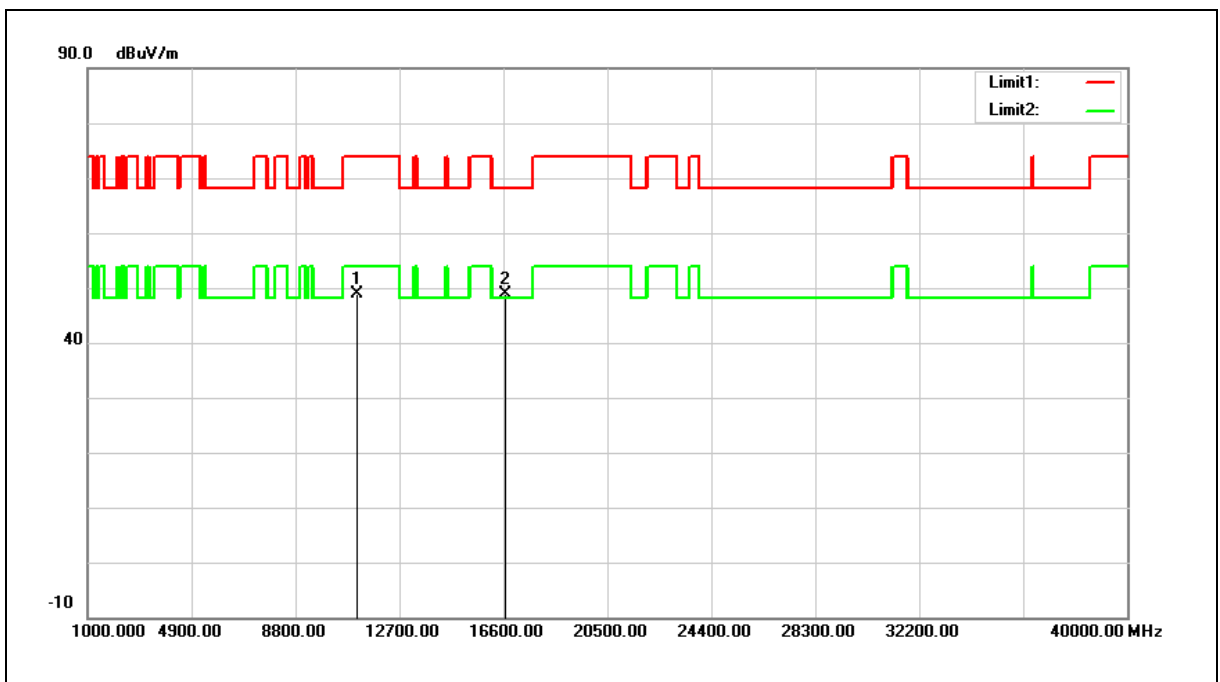


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	36.49	12.46	48.95	74.00	-25.05	peak
2	16680.000	33.69	15.22	48.91	68.20	-19.29	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

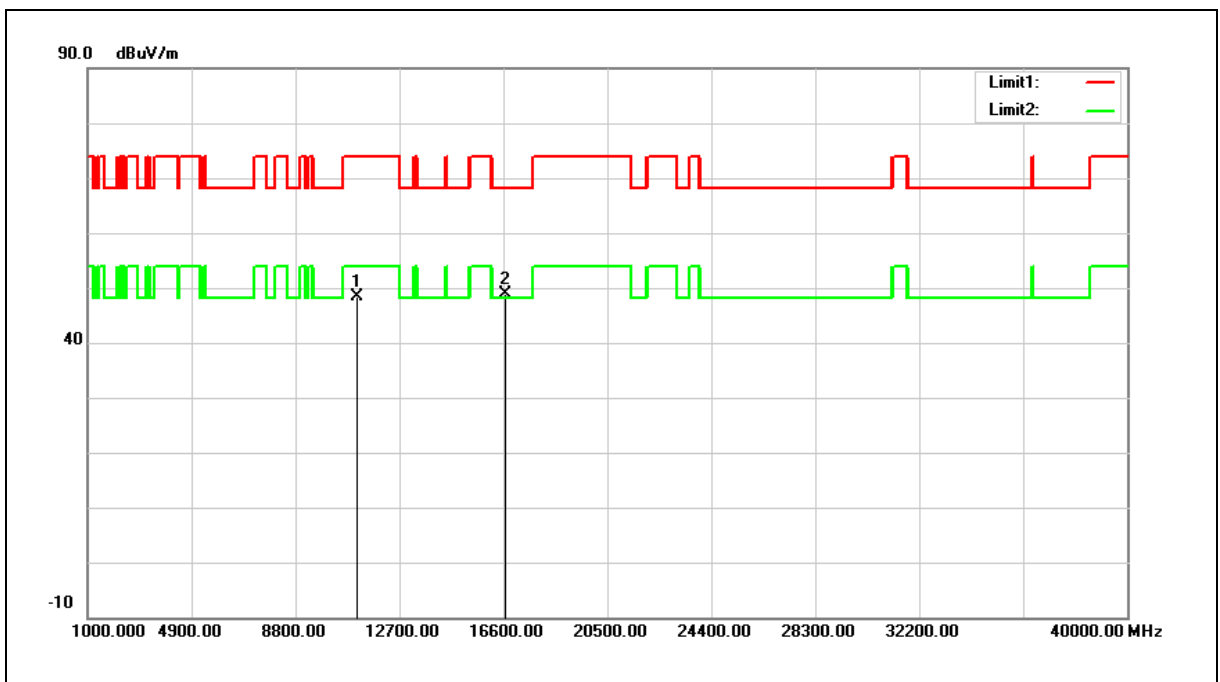


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	36.03	12.46	48.49	74.00	-25.51	peak
2	16680.000	33.68	15.22	48.90	68.20	-19.30	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

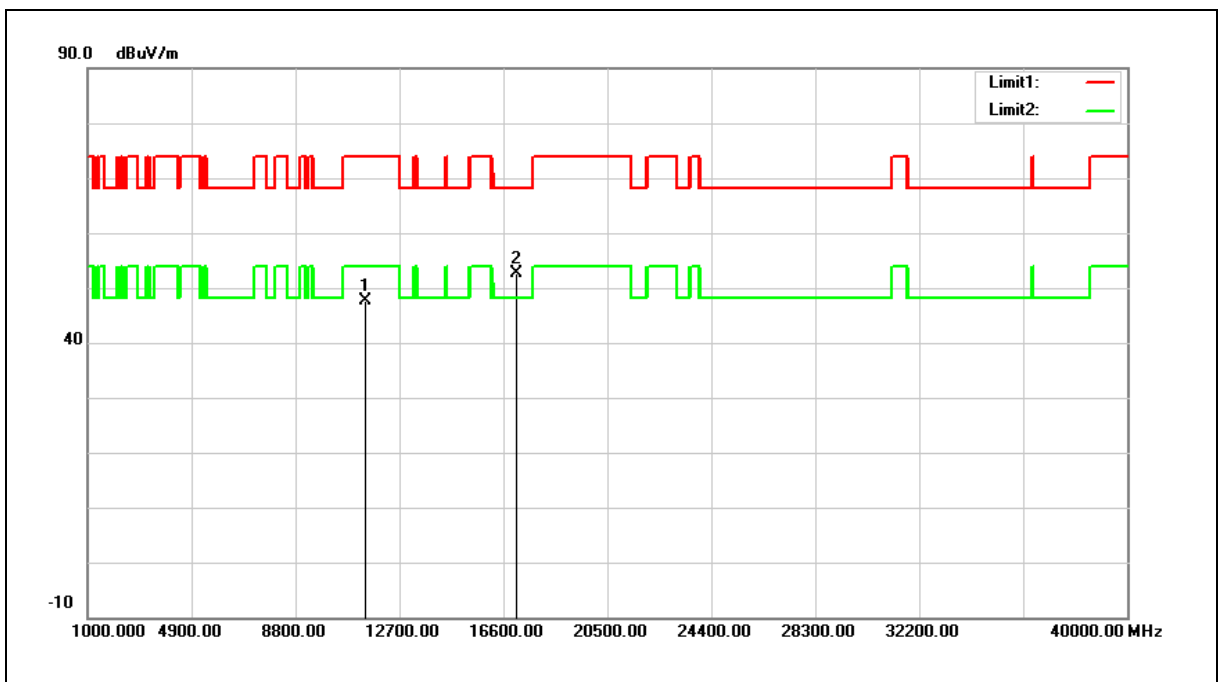


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	34.97	12.63	47.60	74.00	-26.40	peak
2	17100.000	34.93	17.63	52.56	68.20	-15.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

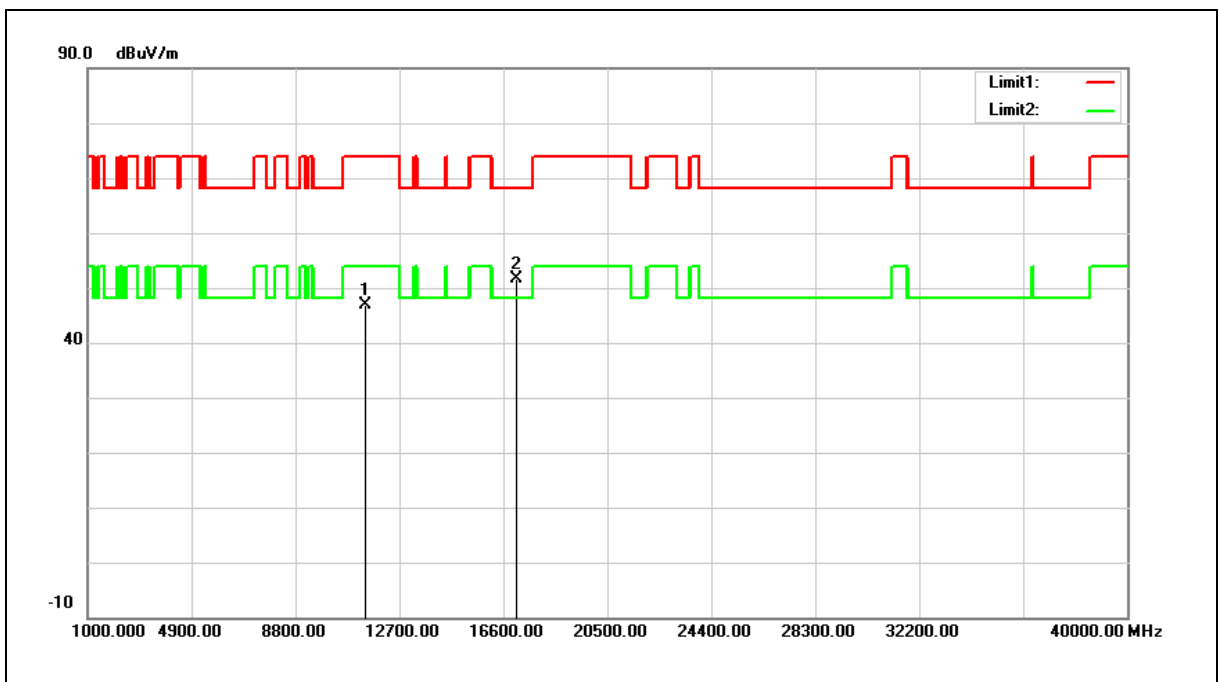


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	34.29	12.63	46.92	74.00	-27.08	peak
2	17100.000	34.02	17.63	51.65	68.20	-16.55	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

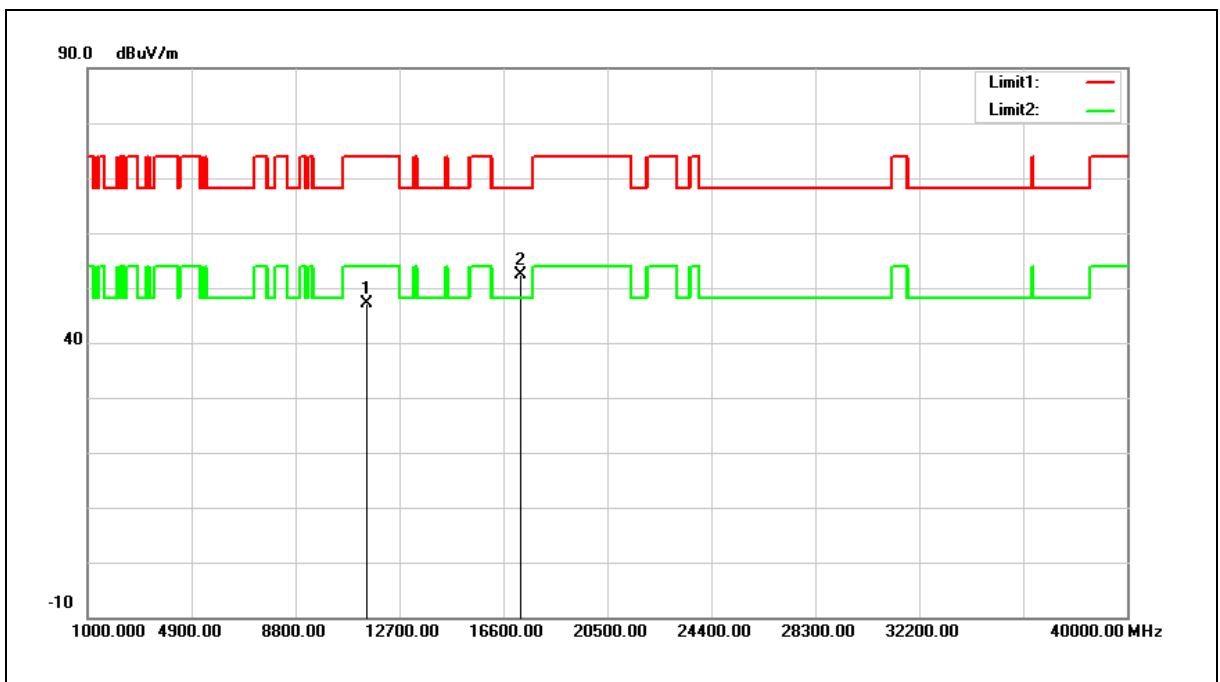


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	34.42	12.68	47.10	74.00	-26.90	peak
2	17235.000	33.86	18.52	52.38	68.20	-15.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

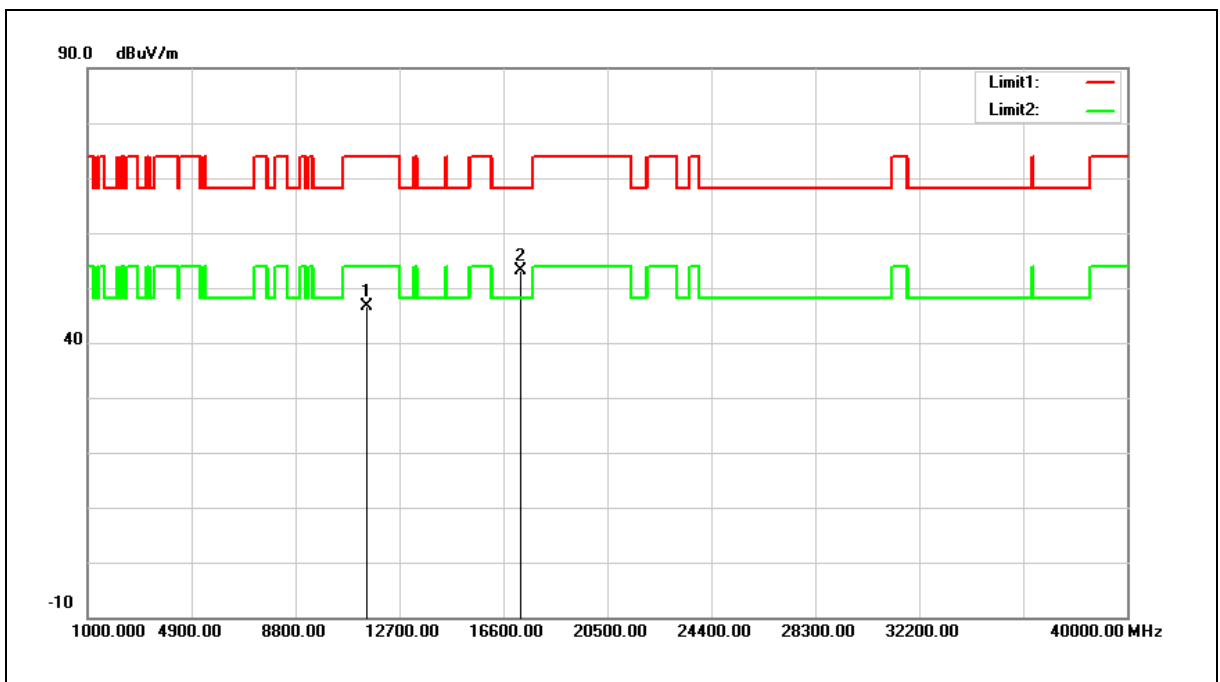


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	33.96	12.68	46.64	74.00	-27.36	peak
2	17235.000	34.54	18.52	53.06	68.20	-15.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

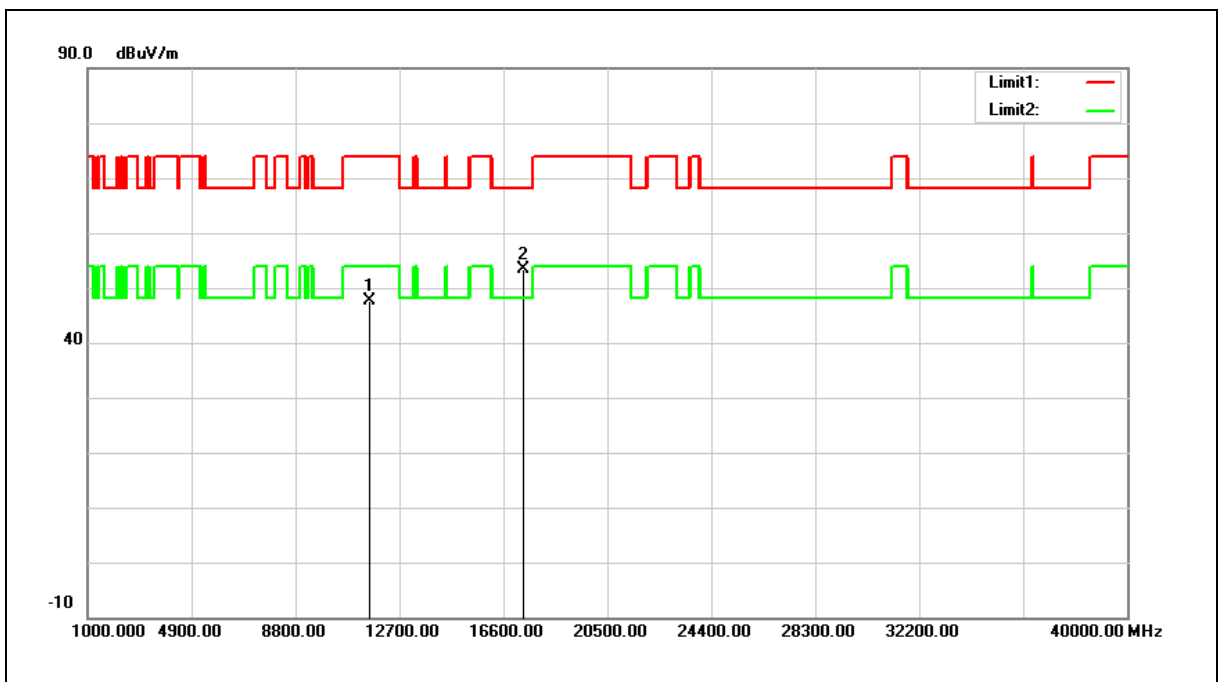


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.08	12.59	47.67	74.00	-26.33	peak
2	17355.000	33.96	19.32	53.28	68.20	-14.92	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

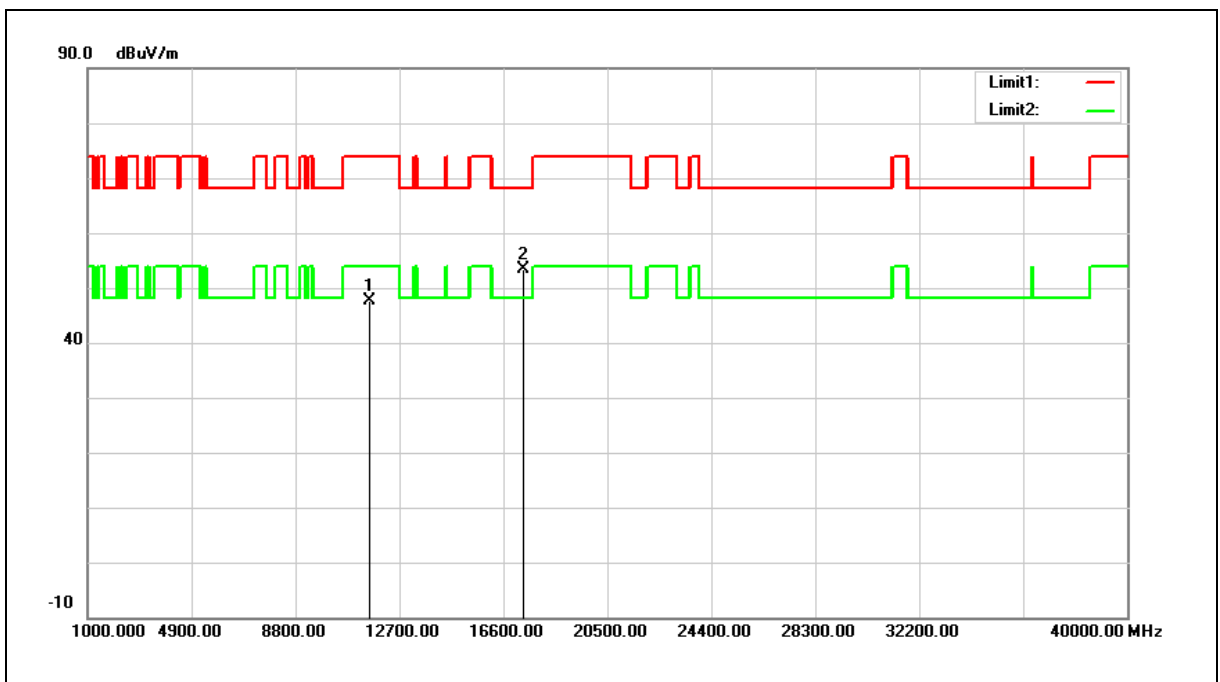


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.12	12.59	47.71	74.00	-26.29	peak
2	17355.000	34.12	19.32	53.44	68.20	-14.76	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

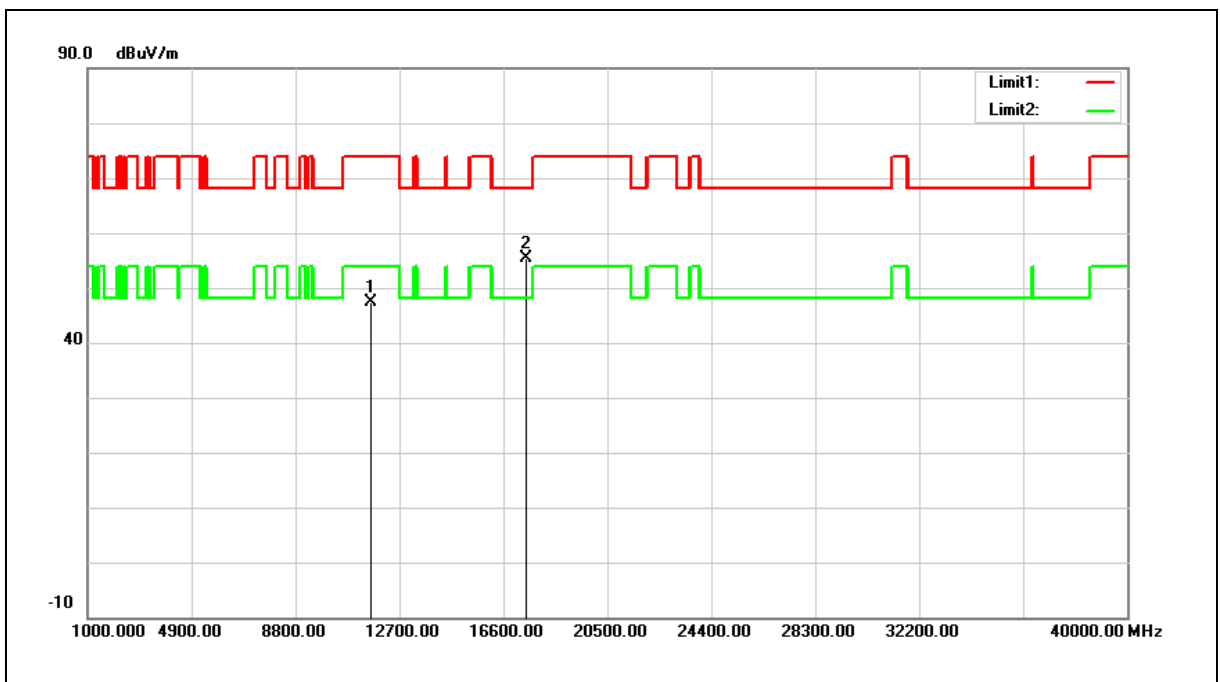


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.85	12.48	47.33	74.00	-26.67	peak
2	17475.000	35.18	20.13	55.31	68.20	-12.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

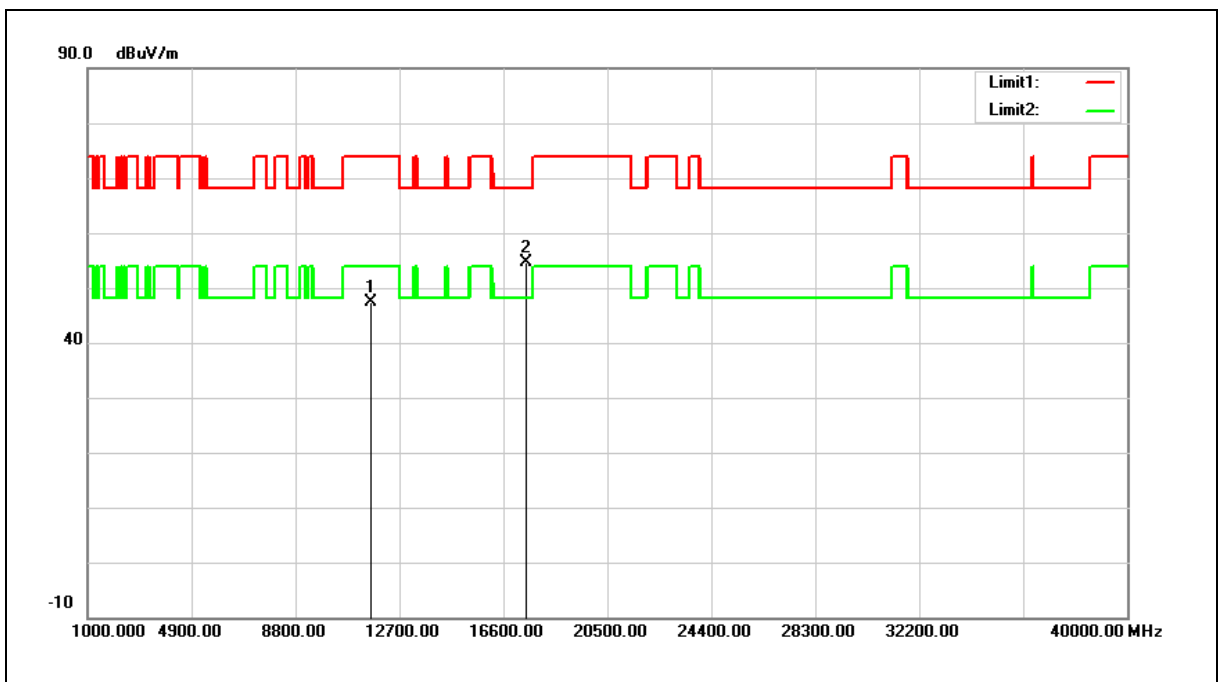


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.78	12.48	47.26	74.00	-26.74	peak
2	17475.000	34.62	20.13	54.75	68.20	-13.45	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

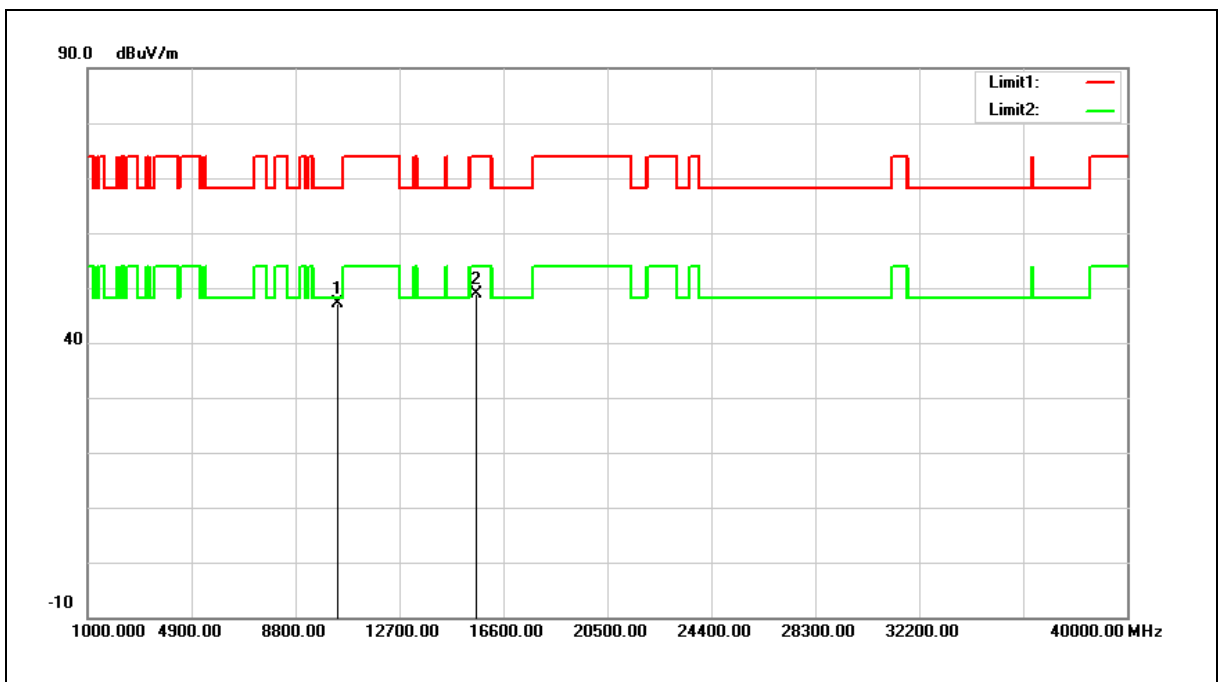


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	35.48	11.75	47.23	68.20	-20.97	peak
2	15570.000	34.32	14.45	48.77	74.00	-25.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

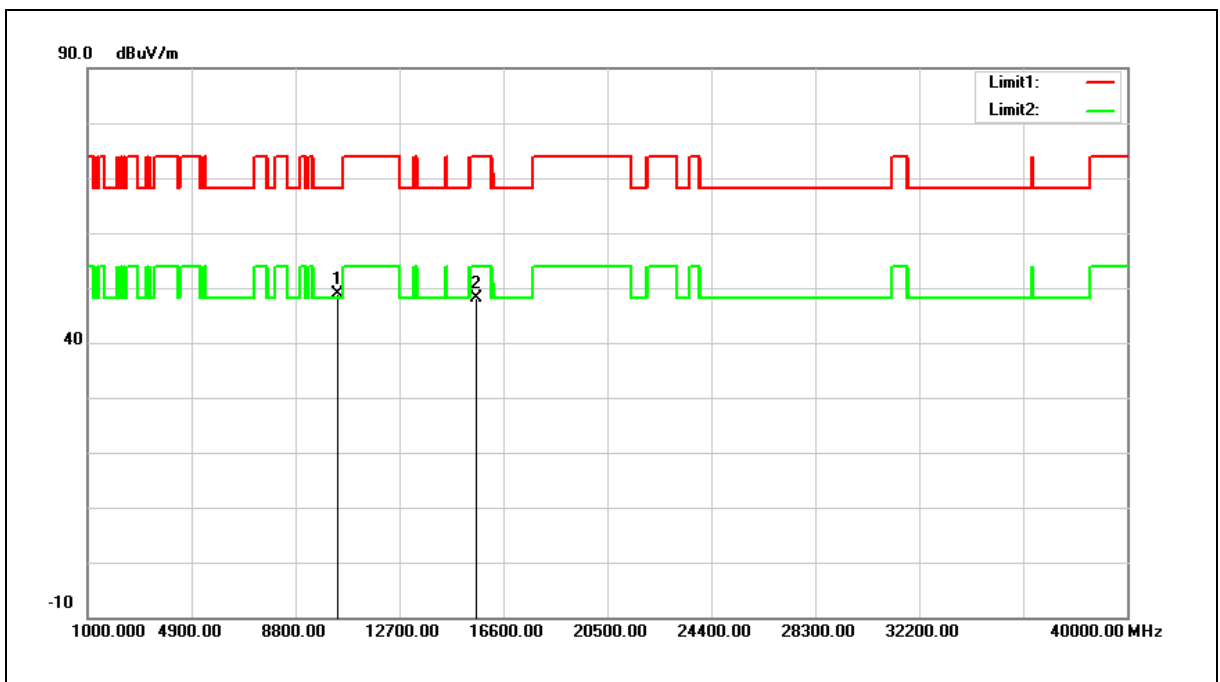


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	37.17	11.75	48.92	68.20	-19.28	peak
2	15570.000	33.64	14.45	48.09	74.00	-25.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

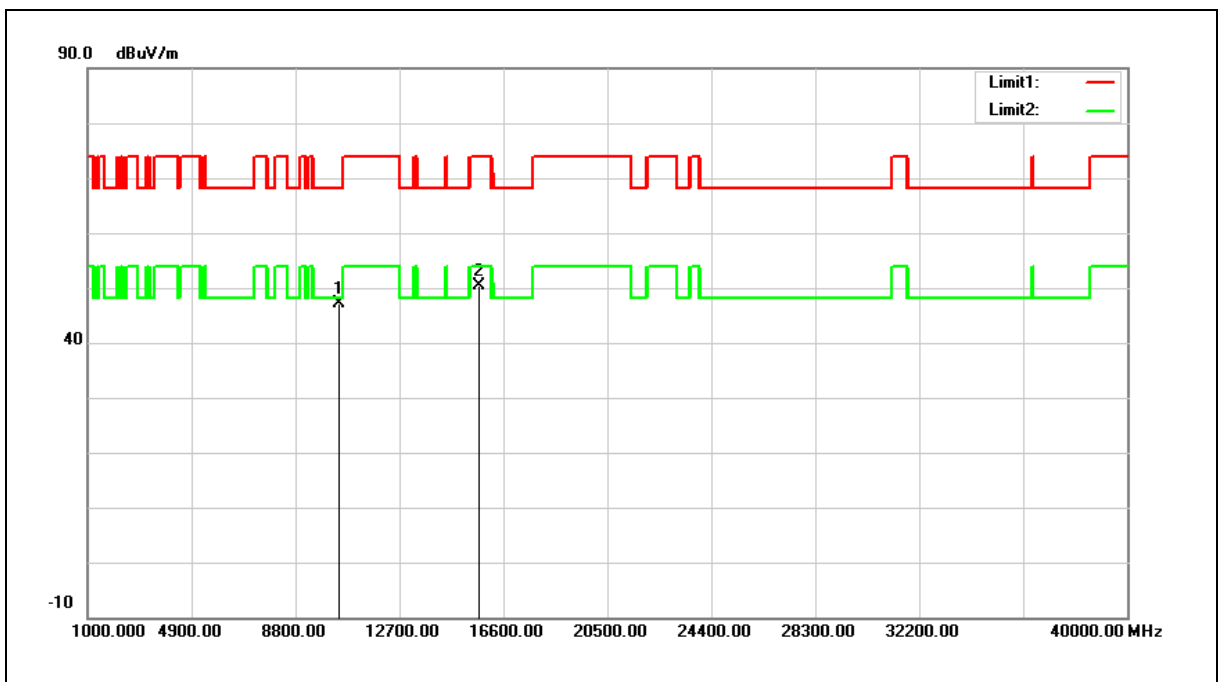


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	35.30	11.95	47.25	68.20	-20.95	peak
2	15690.000	36.10	14.19	50.29	74.00	-23.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

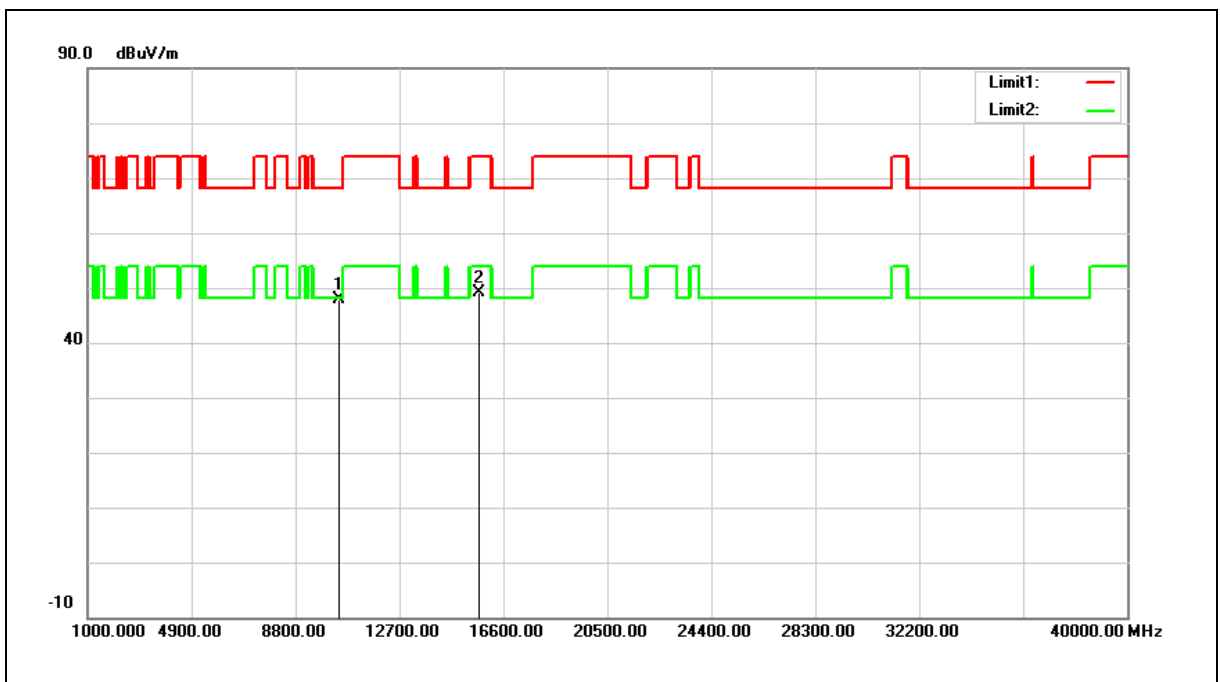


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	36.05	11.95	48.00	68.20	-20.20	peak
2	15690.000	35.03	14.19	49.22	74.00	-24.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

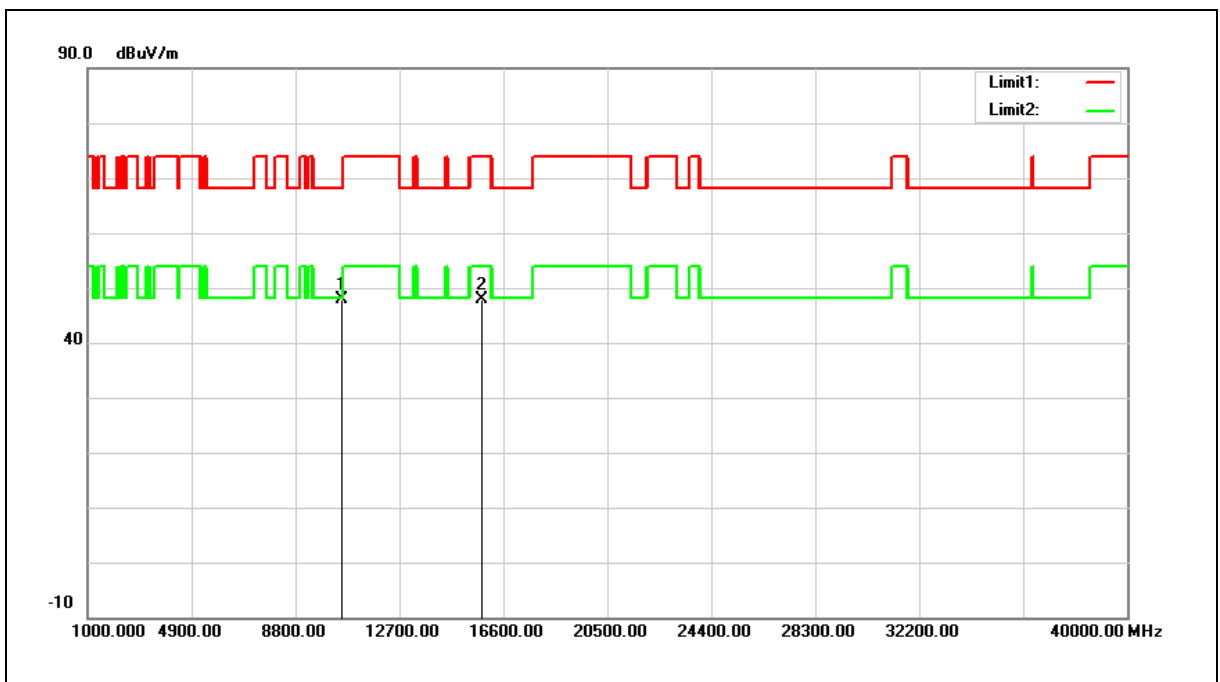


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	35.84	12.06	47.90	68.20	-20.30	peak
2	15810.000	33.98	13.96	47.94	74.00	-26.06	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

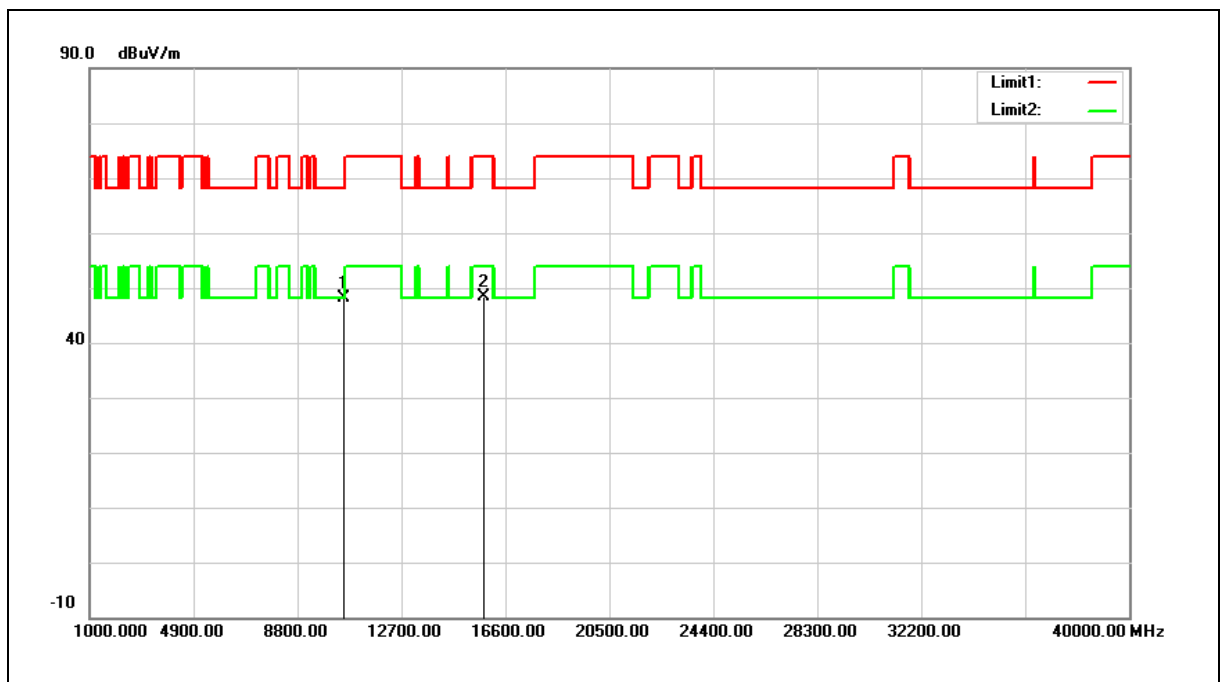


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	36.15	12.06	48.21	68.20	-19.99	peak
2	15810.000	34.40	13.96	48.36	74.00	-25.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

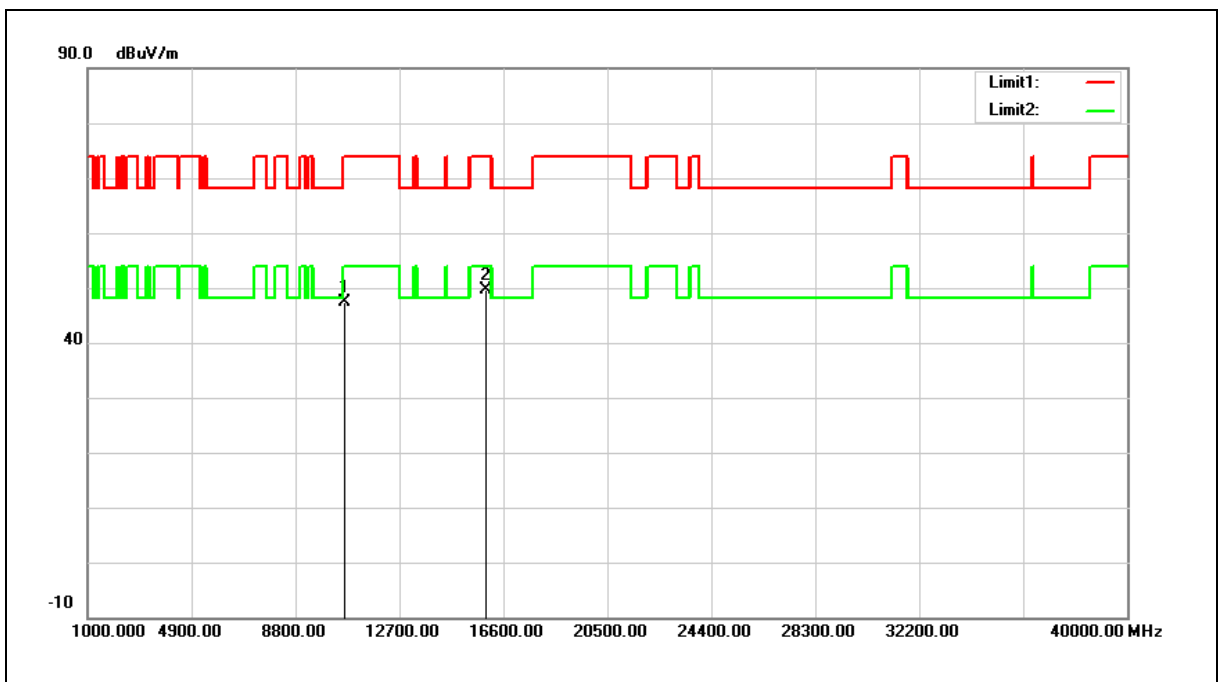


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	35.32	12.12	47.44	74.00	-26.56	peak
2	15930.000	35.92	13.70	49.62	74.00	-24.38	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

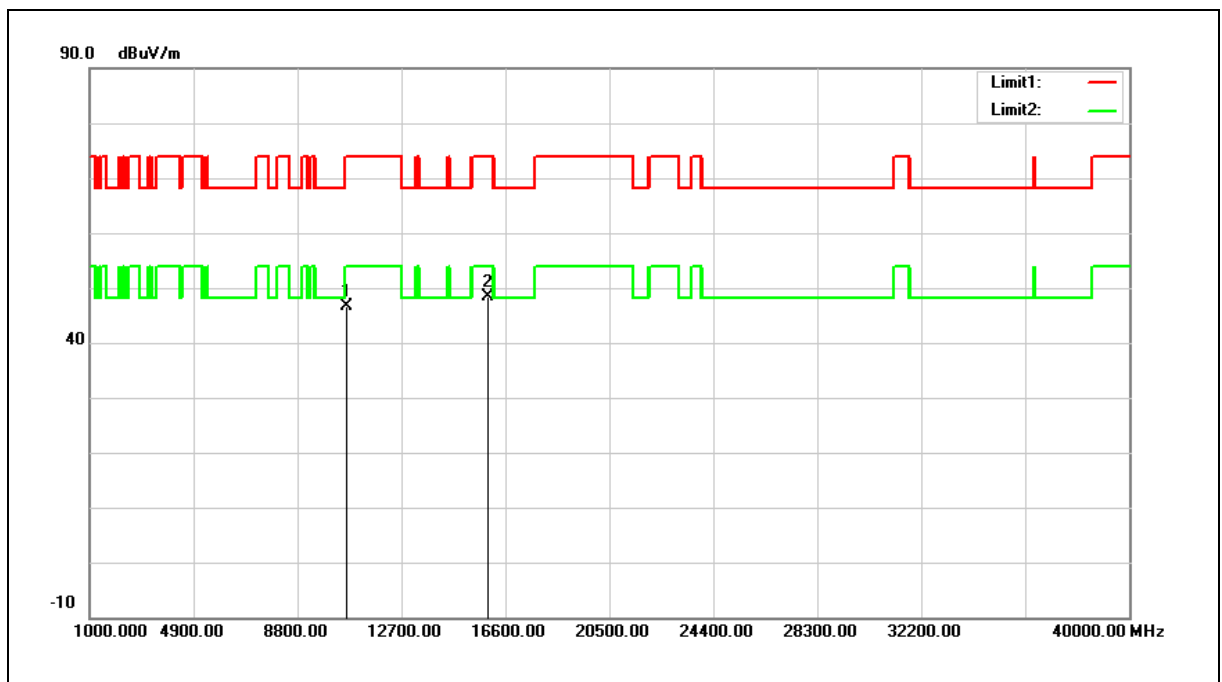


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	34.62	12.12	46.74	74.00	-27.26	peak
2	15930.000	34.68	13.70	48.38	74.00	-25.62	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

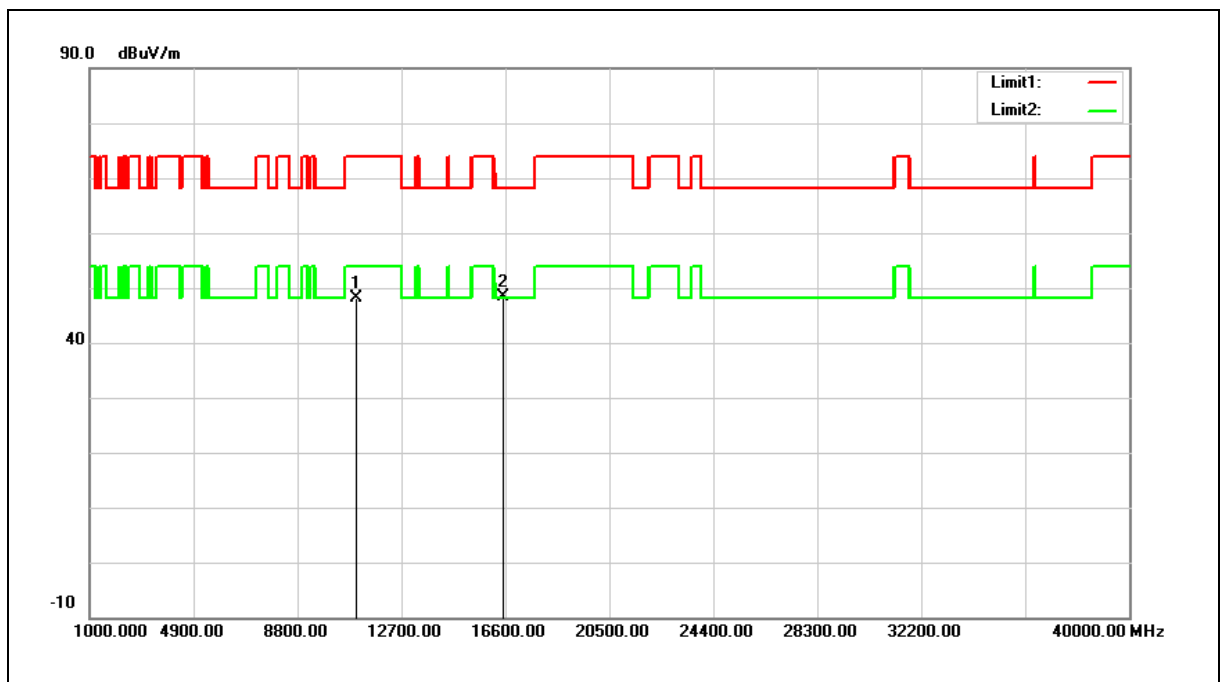


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	35.70	12.40	48.10	74.00	-25.90	peak
2	16530.000	33.90	14.41	48.31	68.20	-19.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

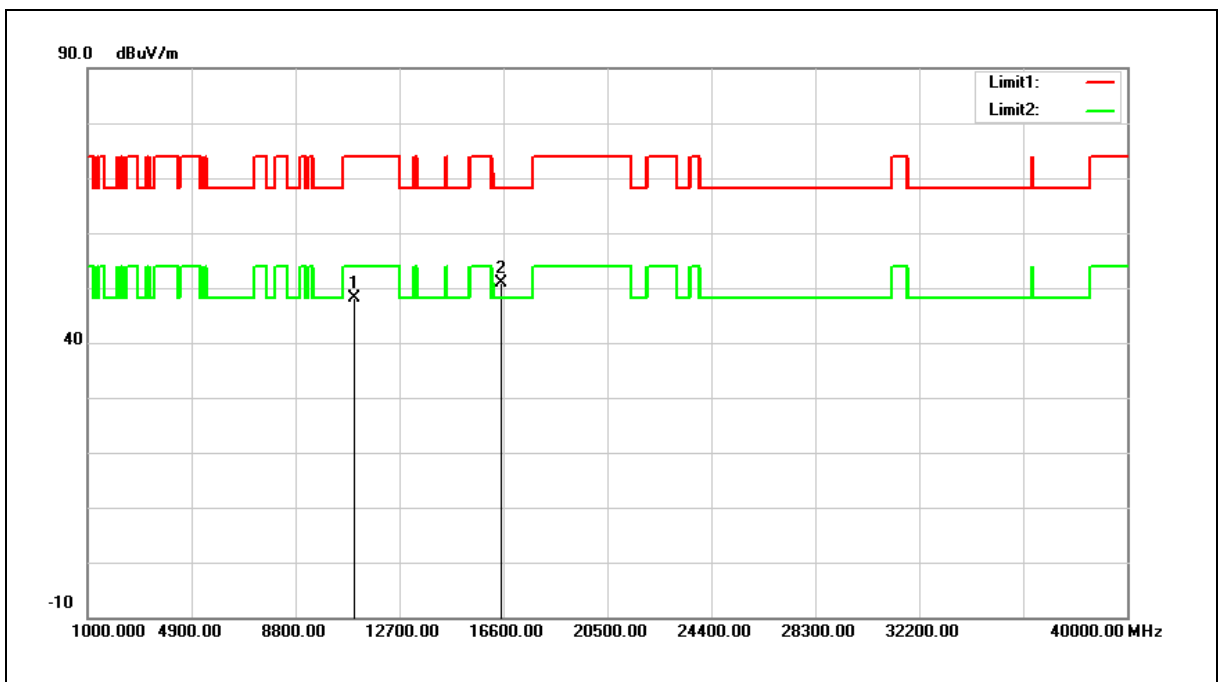


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	35.83	12.40	48.23	74.00	-25.77	peak
2	16530.000	36.35	14.41	50.76	68.20	-17.44	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

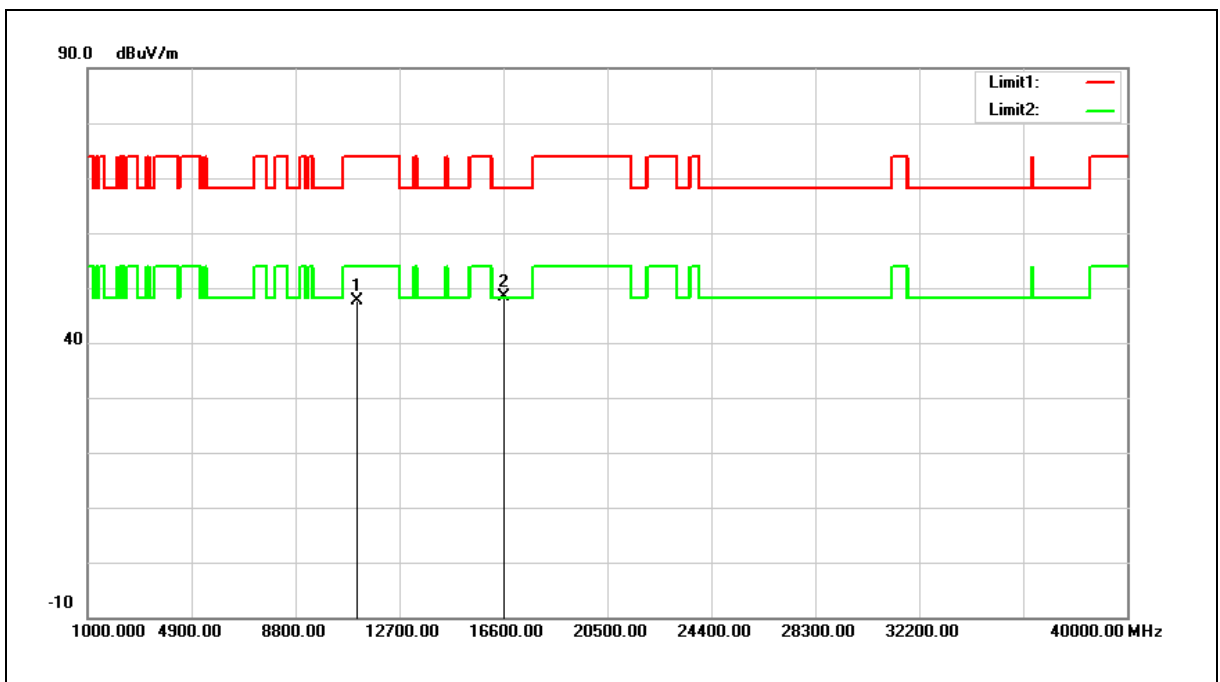


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	35.20	12.45	47.65	74.00	-26.35	peak
2	16650.000	33.25	15.06	48.31	68.20	-19.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

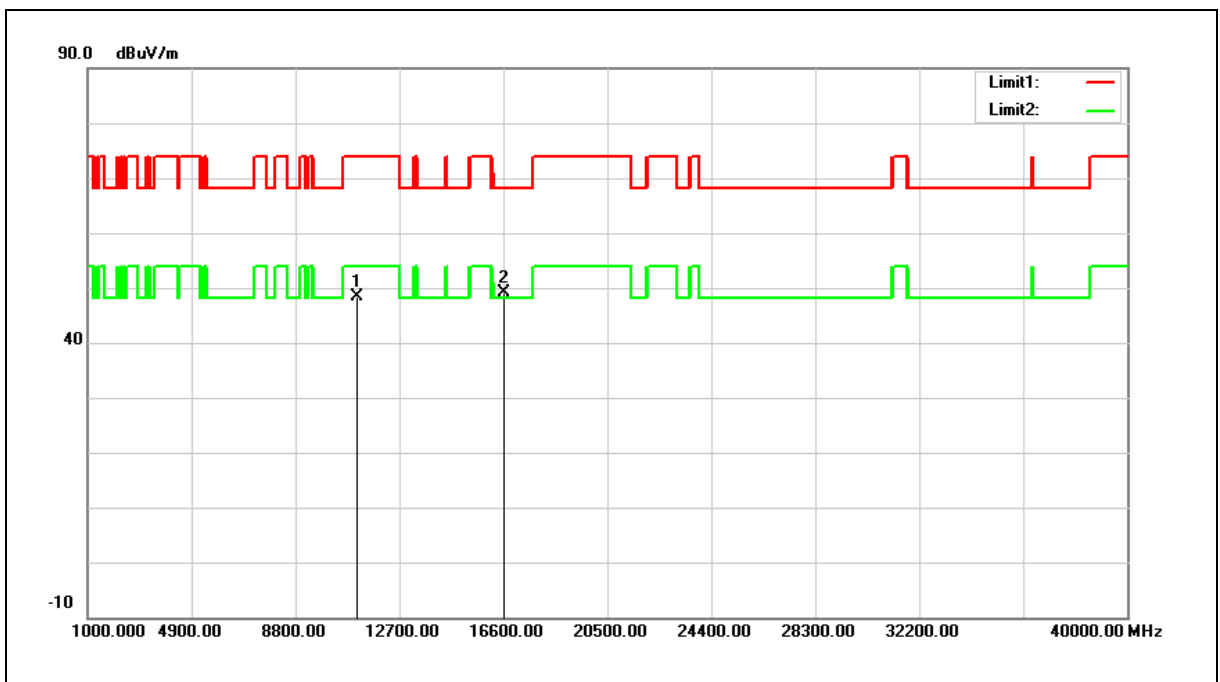


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	36.01	12.45	48.46	74.00	-25.54	peak
2	16650.000	33.96	15.06	49.02	68.20	-19.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

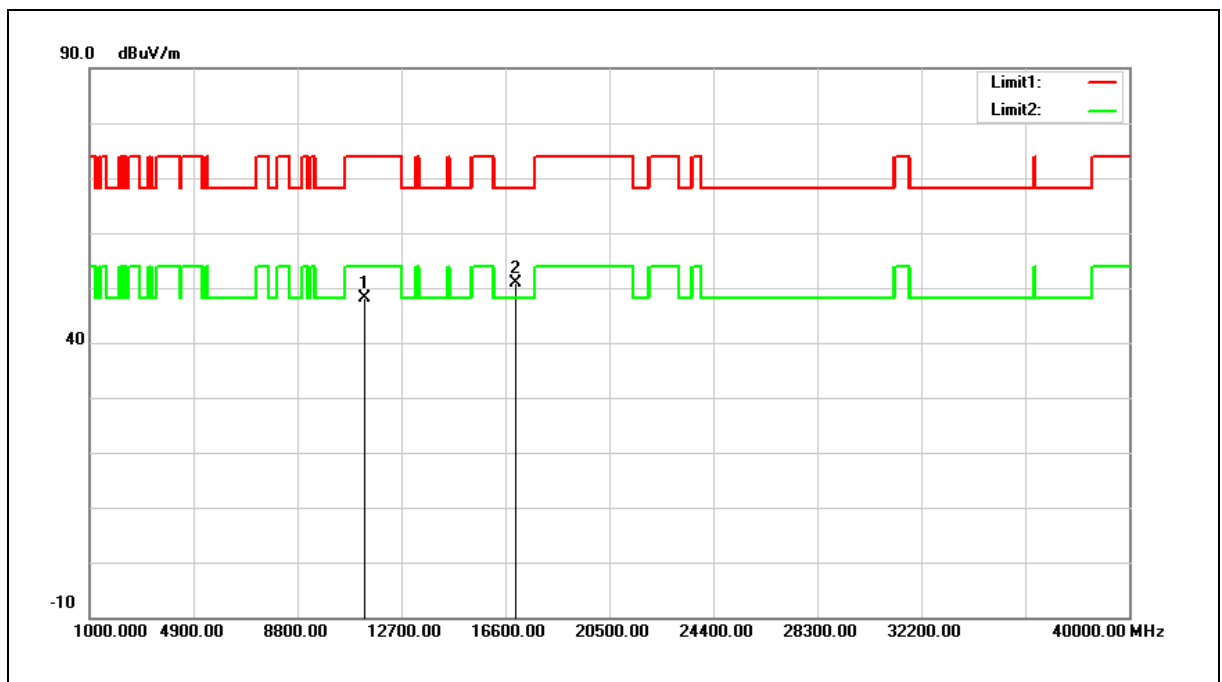


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	35.61	12.59	48.20	74.00	-25.80	peak
2	17010.000	33.88	17.02	50.90	68.20	-17.30	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

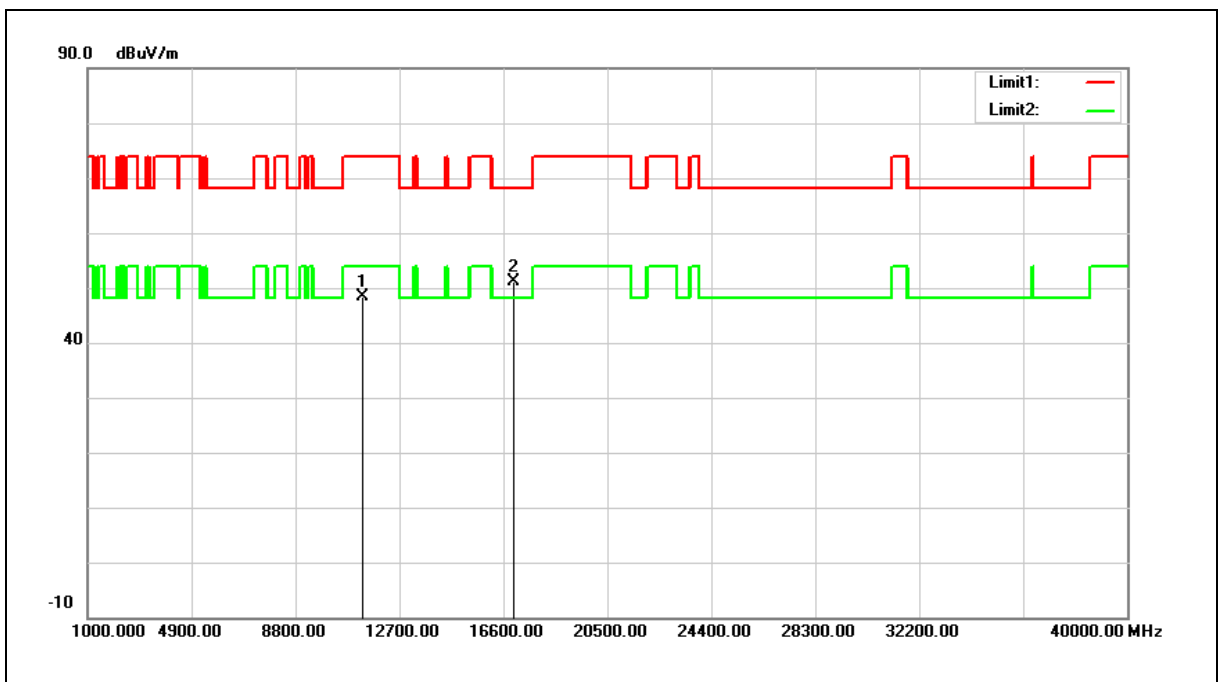


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	35.83	12.59	48.42	74.00	-25.58	peak
2	17010.000	34.21	17.02	51.23	68.20	-16.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

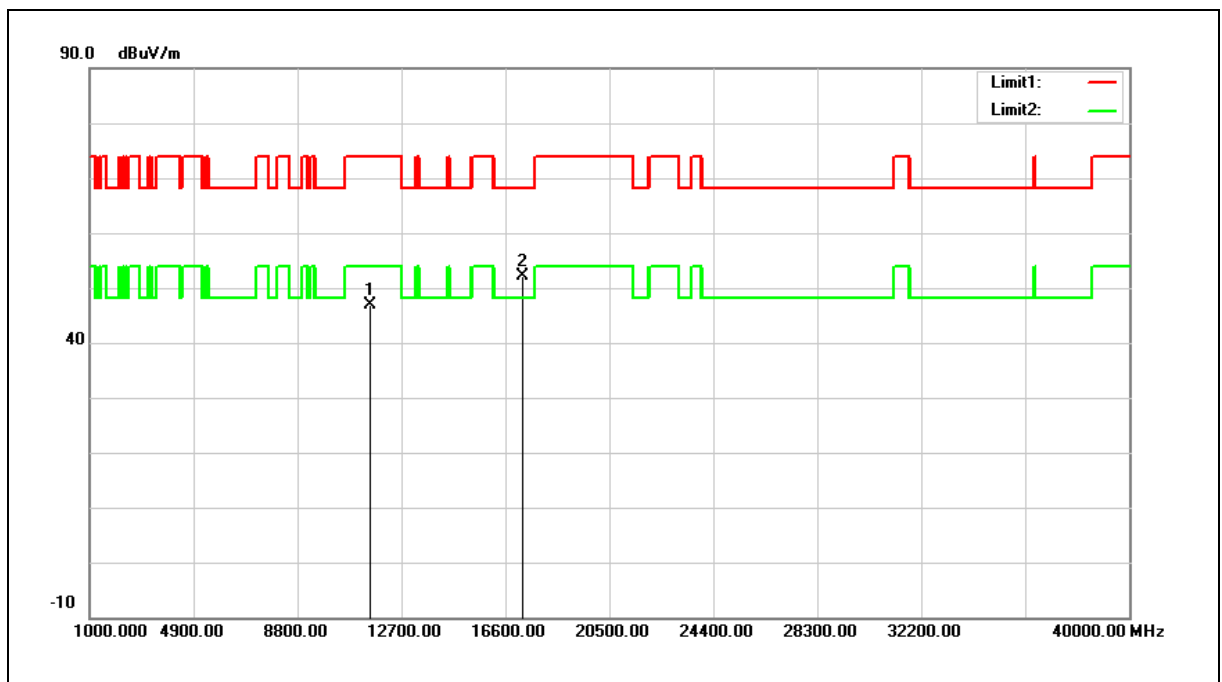


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	34.23	12.68	46.91	74.00	-27.09	peak
2	17265.000	33.35	18.72	52.07	68.20	-16.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

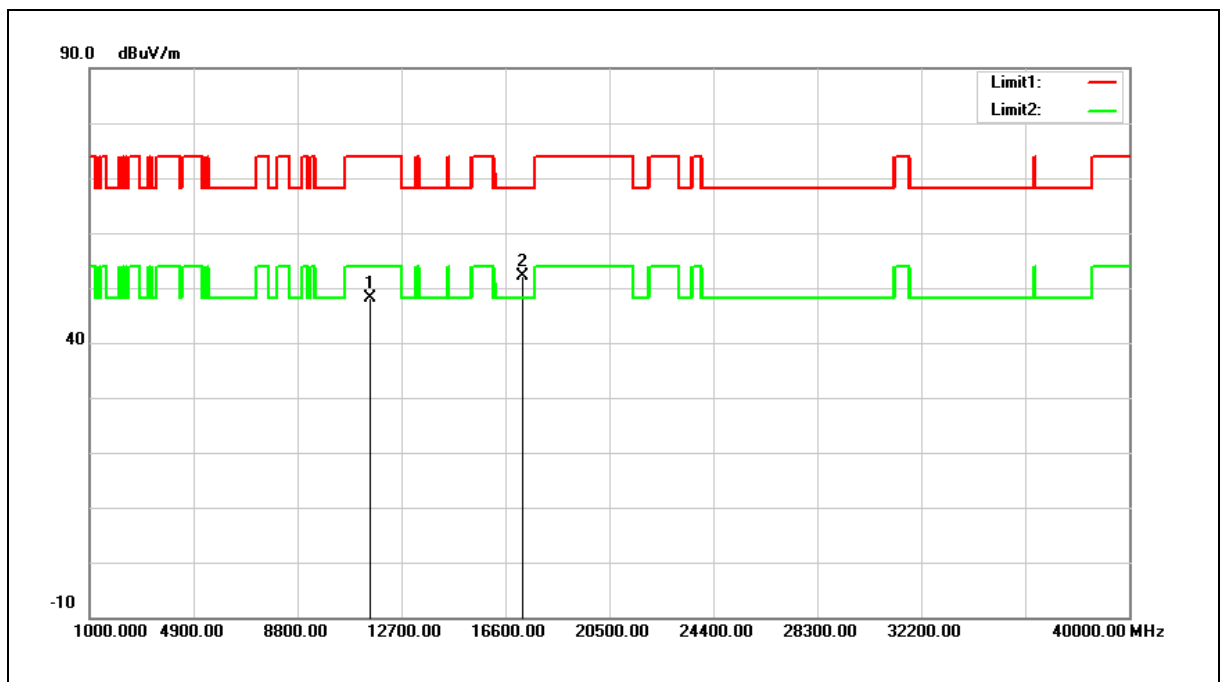


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	35.41	12.68	48.09	74.00	-25.91	peak
2	17265.000	33.48	18.72	52.20	68.20	-16.00	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

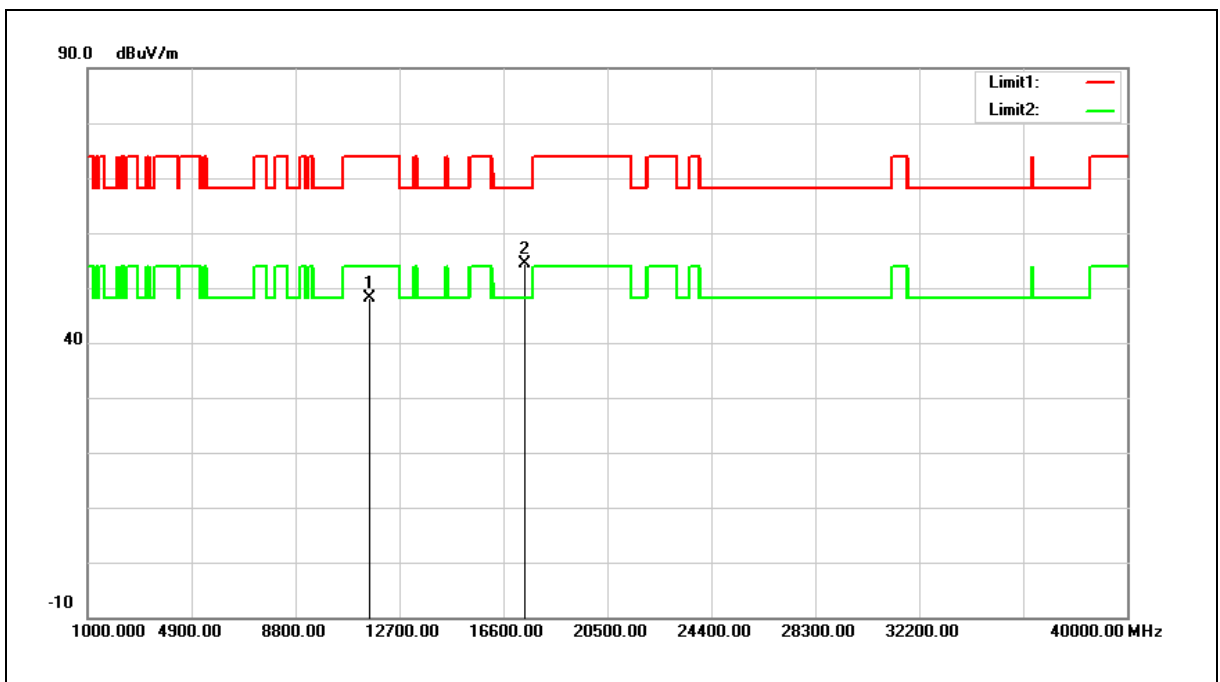


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	35.57	12.56	48.13	74.00	-25.87	peak
2	17385.000	34.91	19.52	54.43	68.20	-13.77	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

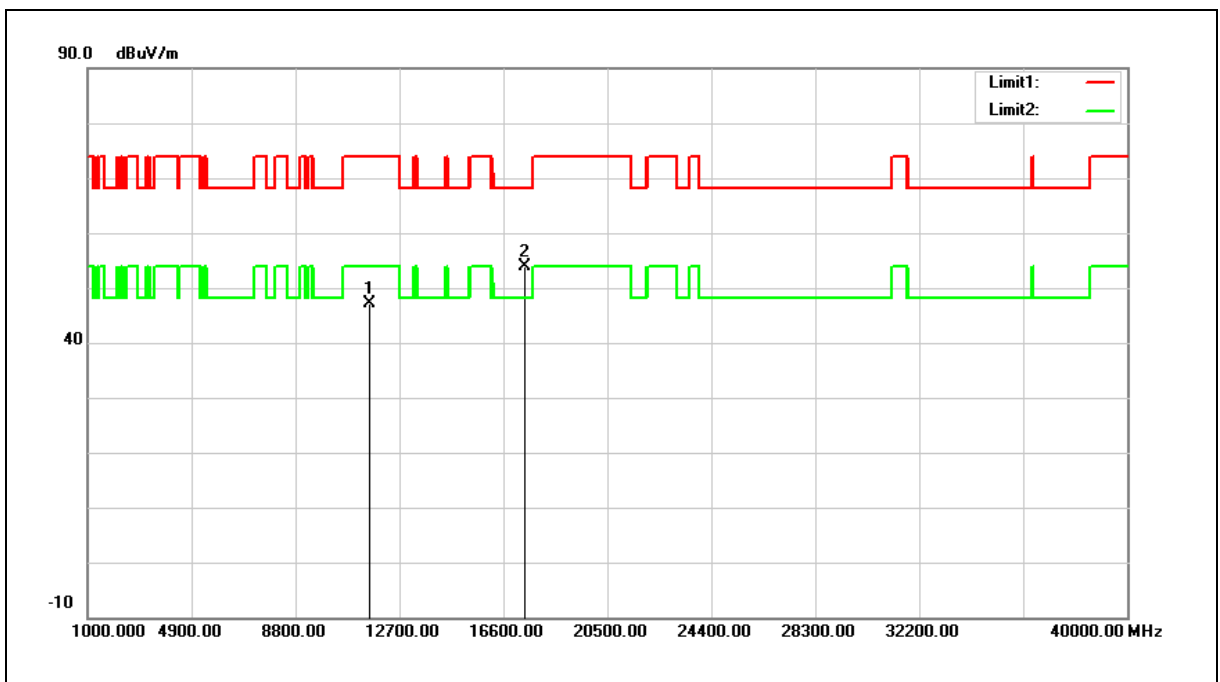


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	34.60	12.56	47.16	74.00	-26.84	peak
2	17385.000	34.47	19.52	53.99	68.20	-14.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

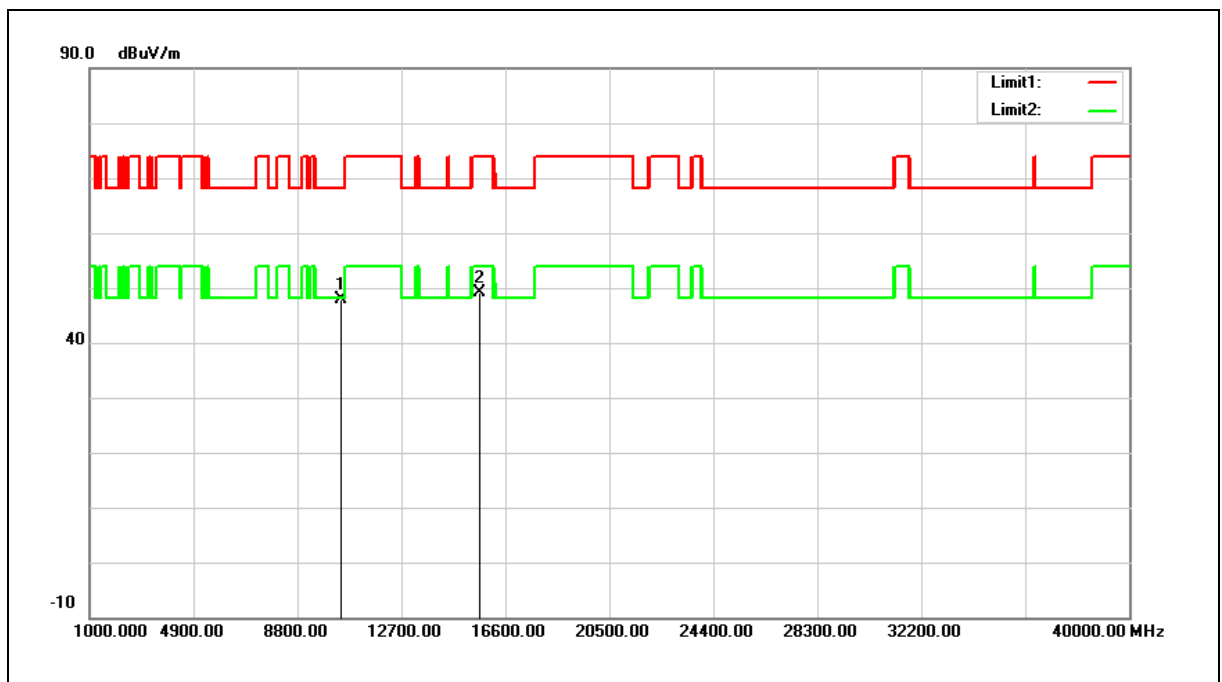


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	36.11	11.85	47.96	68.20	-20.24	peak
2	15630.000	34.72	14.33	49.05	74.00	-24.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5210MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

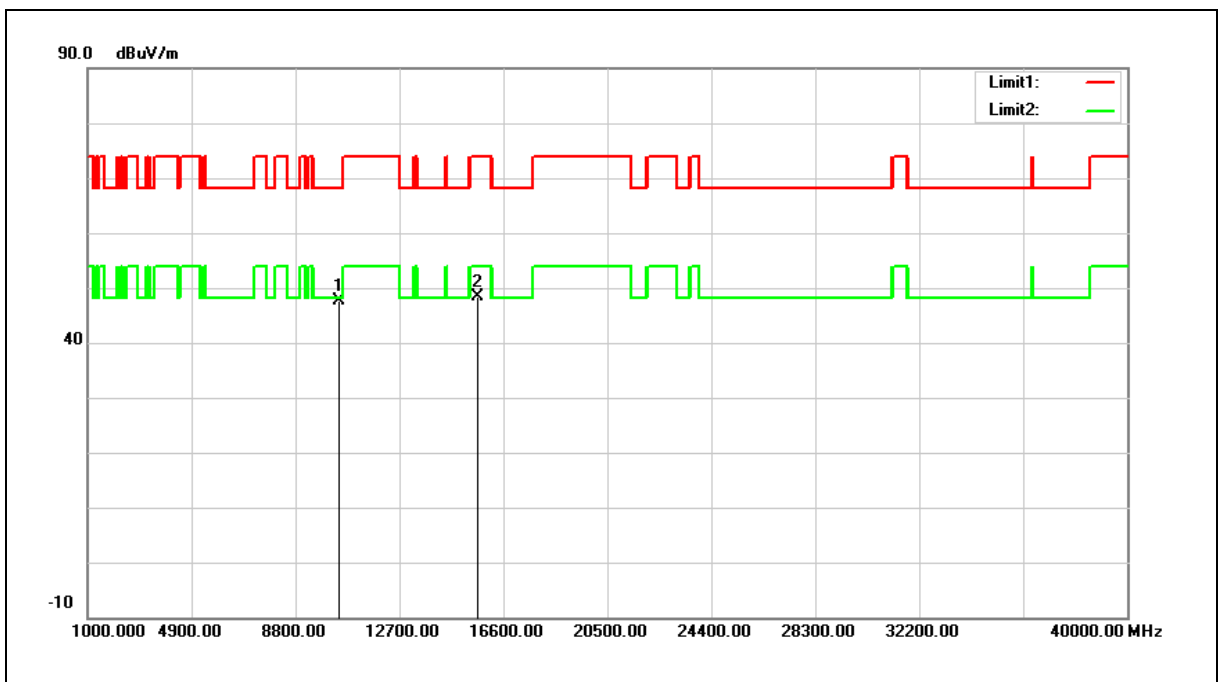


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	35.85	11.85	47.70	68.20	-20.50	peak
2	15630.000	34.09	14.33	48.42	74.00	-25.58	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

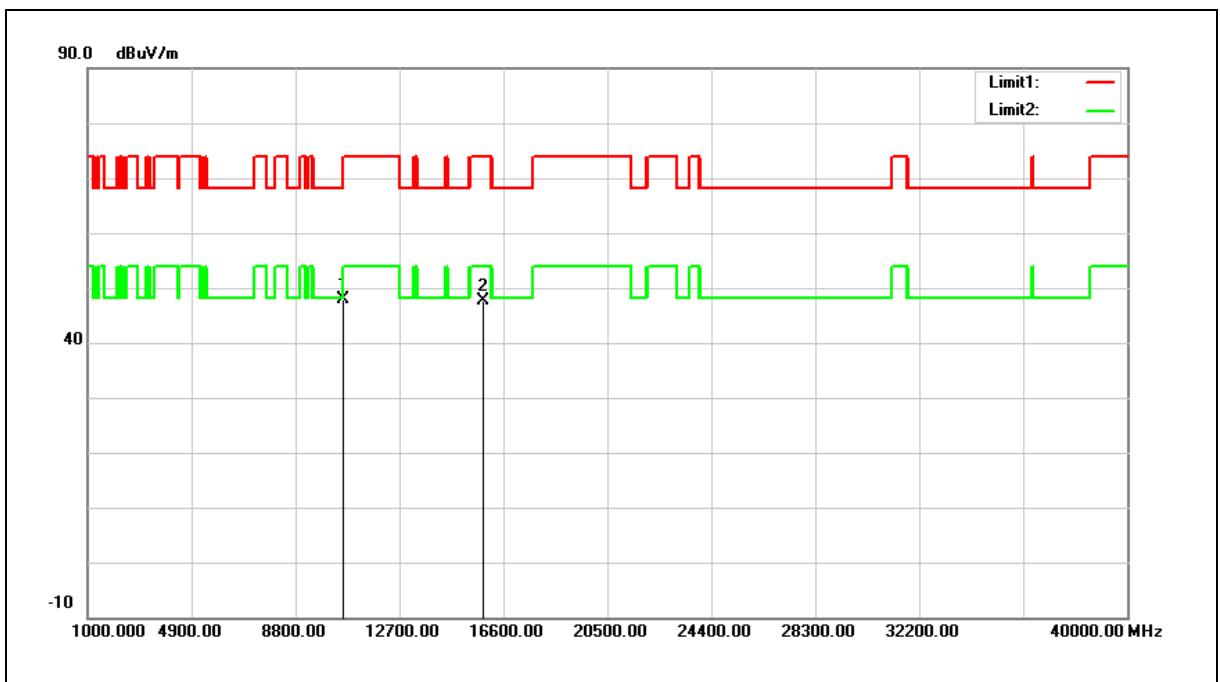


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	35.75	12.10	47.85	68.20	-20.35	peak
2	15870.000	33.78	13.82	47.60	74.00	-26.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5290MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

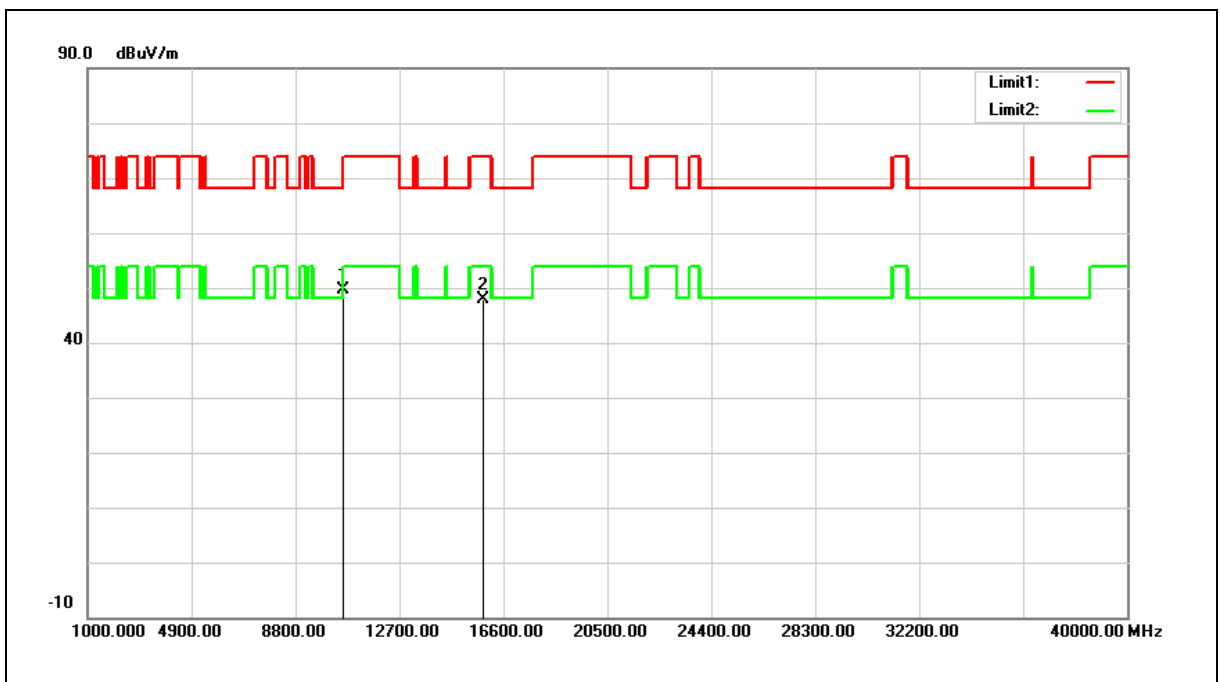


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10580.000	37.55	12.10	49.65	68.20	-18.55	peak
2	15870.000	33.97	13.82	47.79	74.00	-26.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

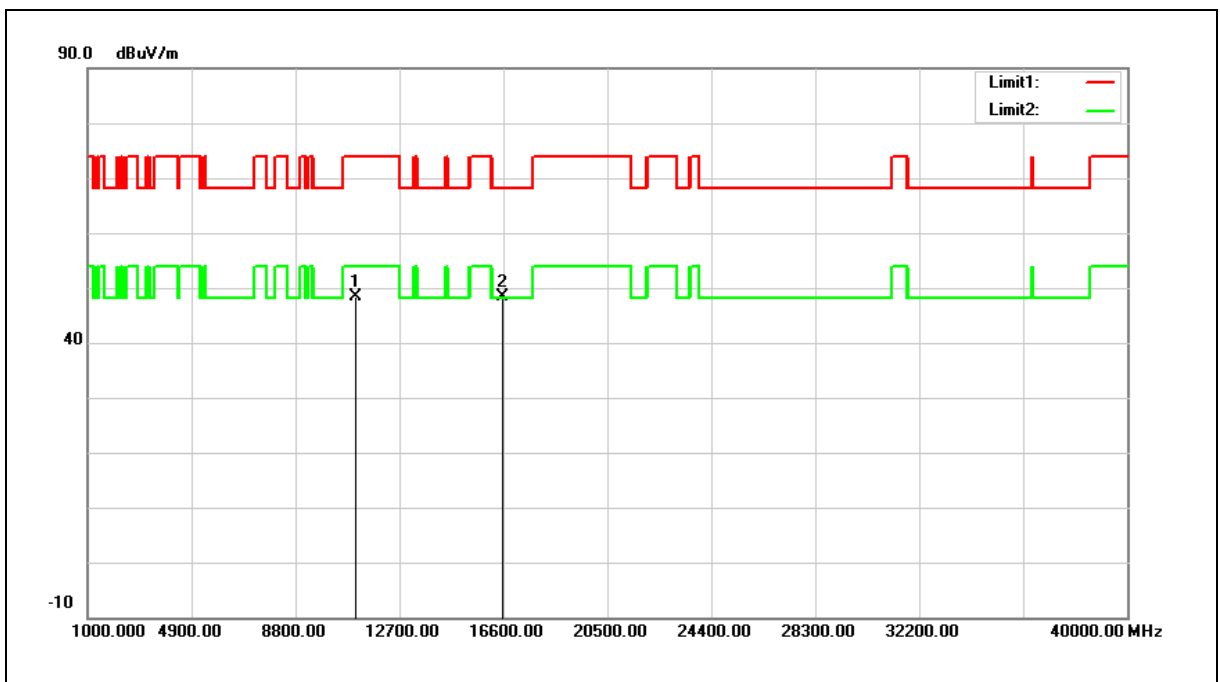


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	35.84	12.43	48.27	74.00	-25.73	peak
2	16590.000	33.63	14.73	48.36	68.20	-19.84	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5530MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

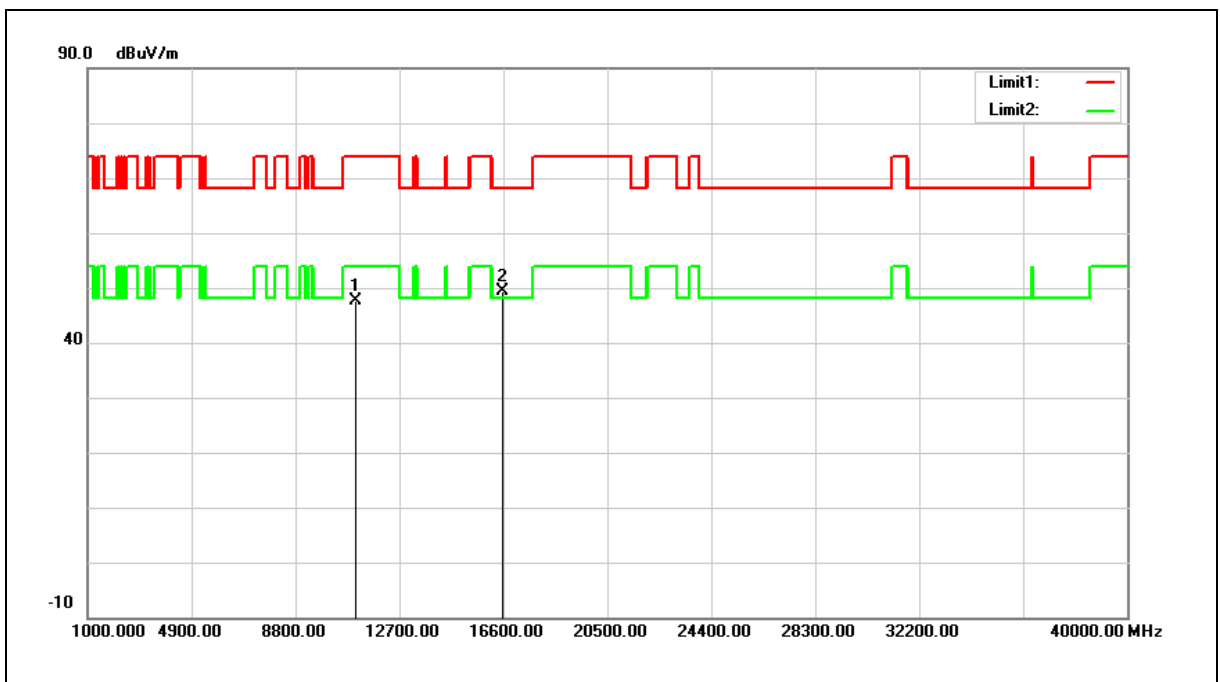


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	35.20	12.43	47.63	74.00	-26.37	peak
2	16590.000	34.70	14.73	49.43	68.20	-18.77	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

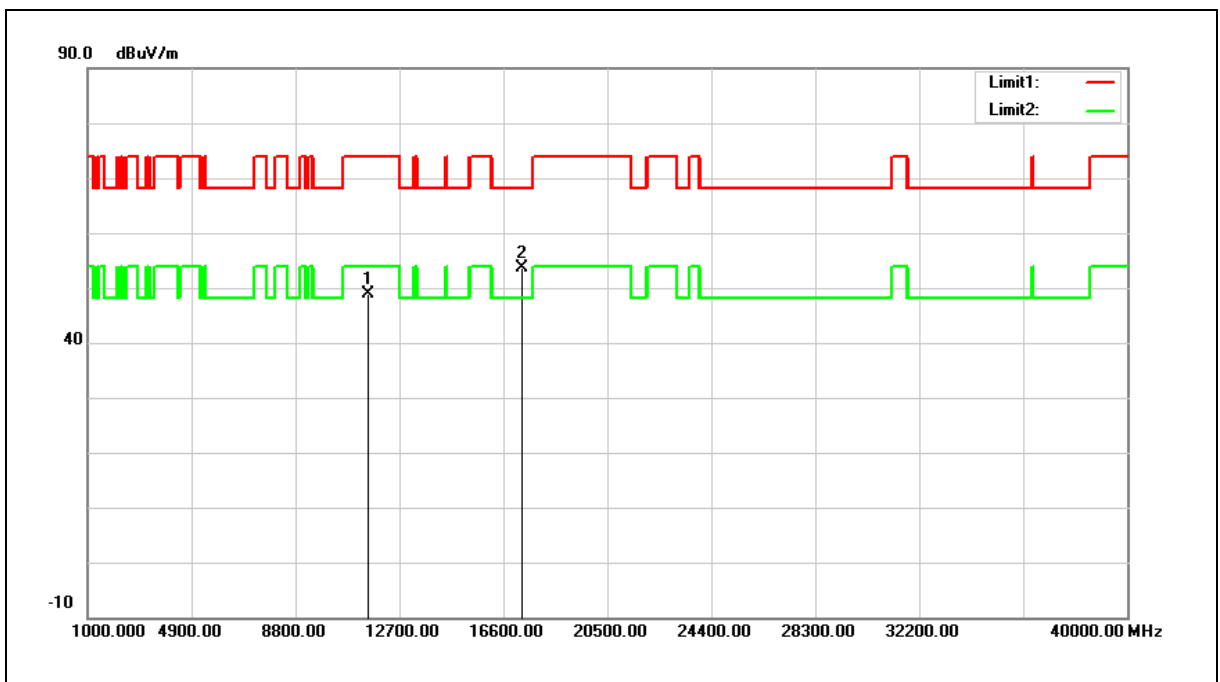


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	36.23	12.62	48.85	74.00	-25.15	peak
2	17325.000	34.62	19.12	53.74	68.20	-14.46	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5775MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

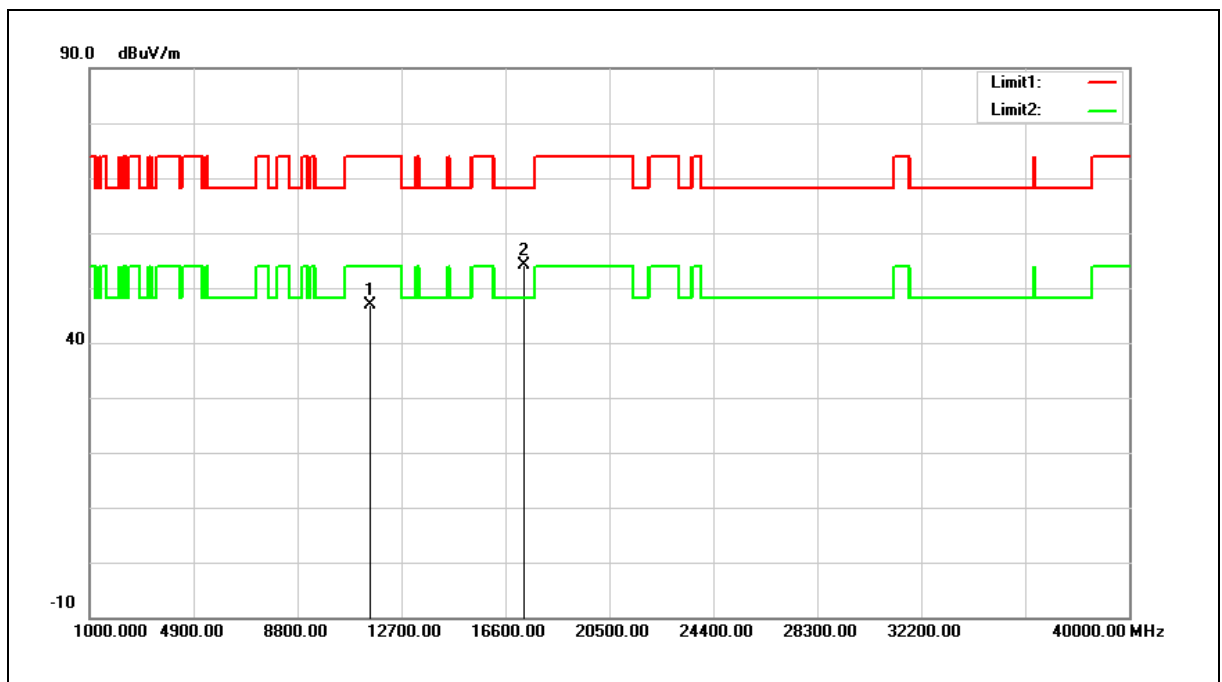


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	34.32	12.62	46.94	74.00	-27.06	peak
2	17325.000	35.08	19.12	54.20	68.20	-14.00	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5250MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

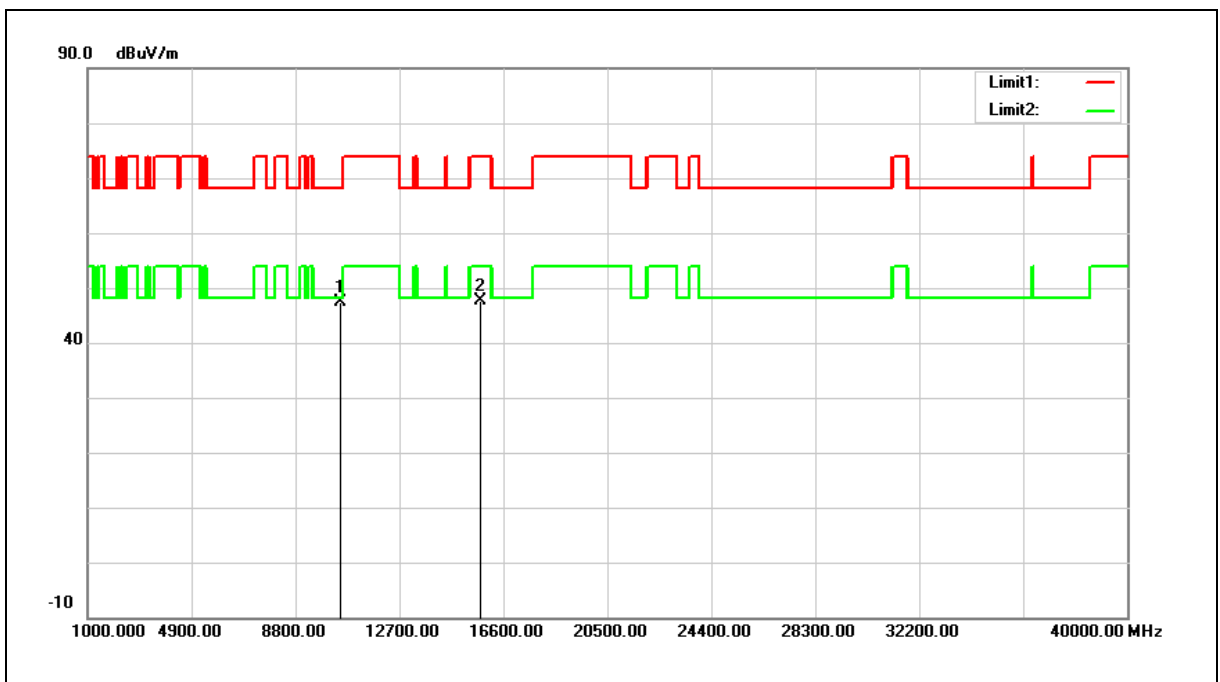


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10500.000	35.39	12.05	47.44	68.20	-20.76	peak
2	15750.000	33.61	14.08	47.69	74.00	-26.31	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5250MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

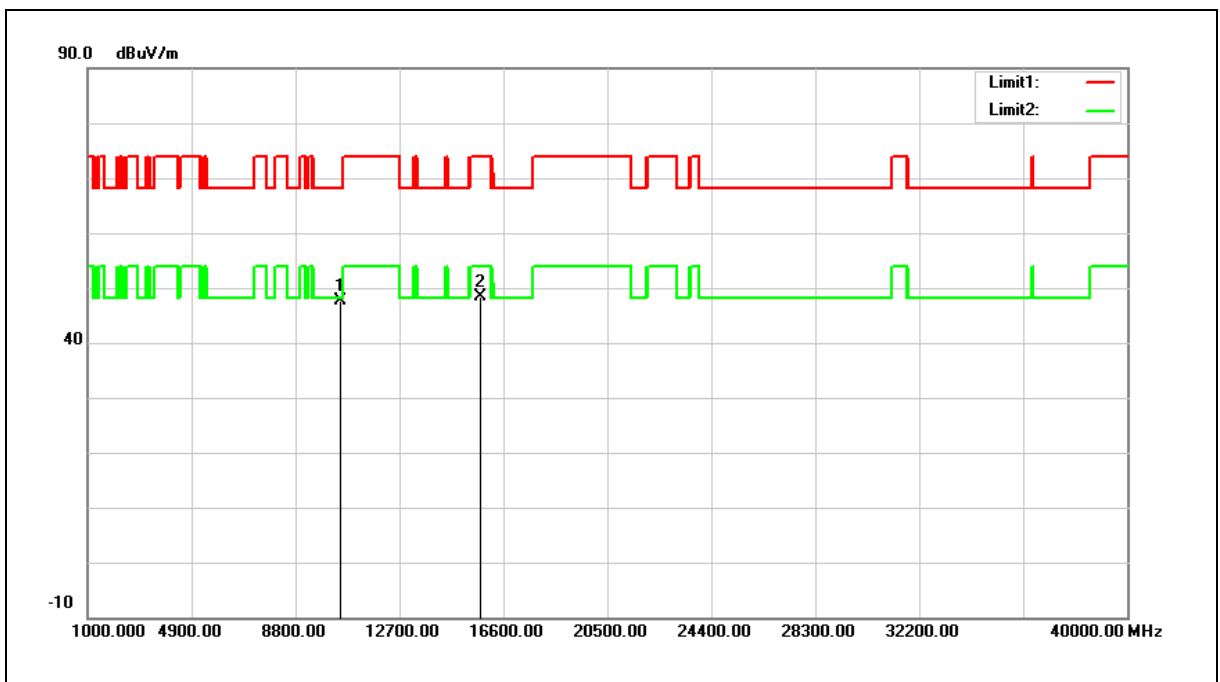


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10500.000	35.55	12.05	47.60	68.20	-20.60	peak
2	15750.000	34.23	14.08	48.31	74.00	-25.69	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting		
	(Bluetooth + WLAN 5 GHz)		
Ant.Polar.:	Horizontal		

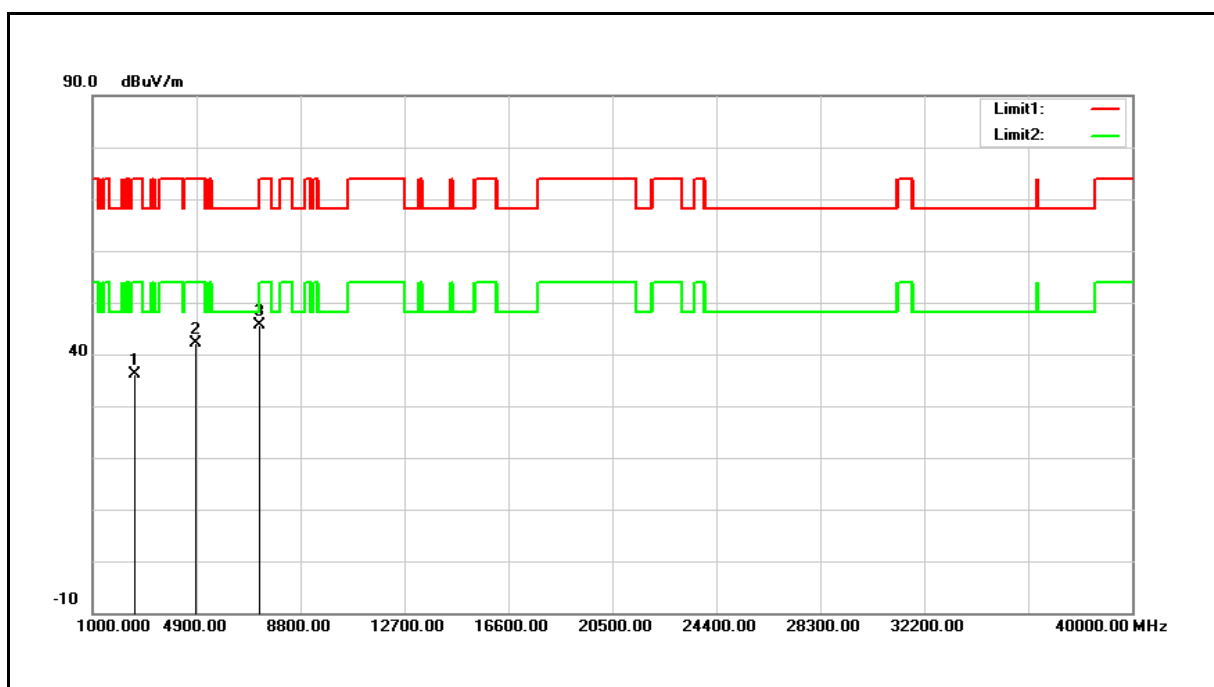


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2598.000	42.98	-6.88	36.10	74.00	-37.90	peak
2	4825.000	43.35	-1.24	42.11	74.00	-31.89	peak
3	7273.000	39.65	5.98	45.63	74.00	-28.37	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting		
	(Bluetooth + WLAN 5 GHz)		
Ant.Polar.:	Vertical		

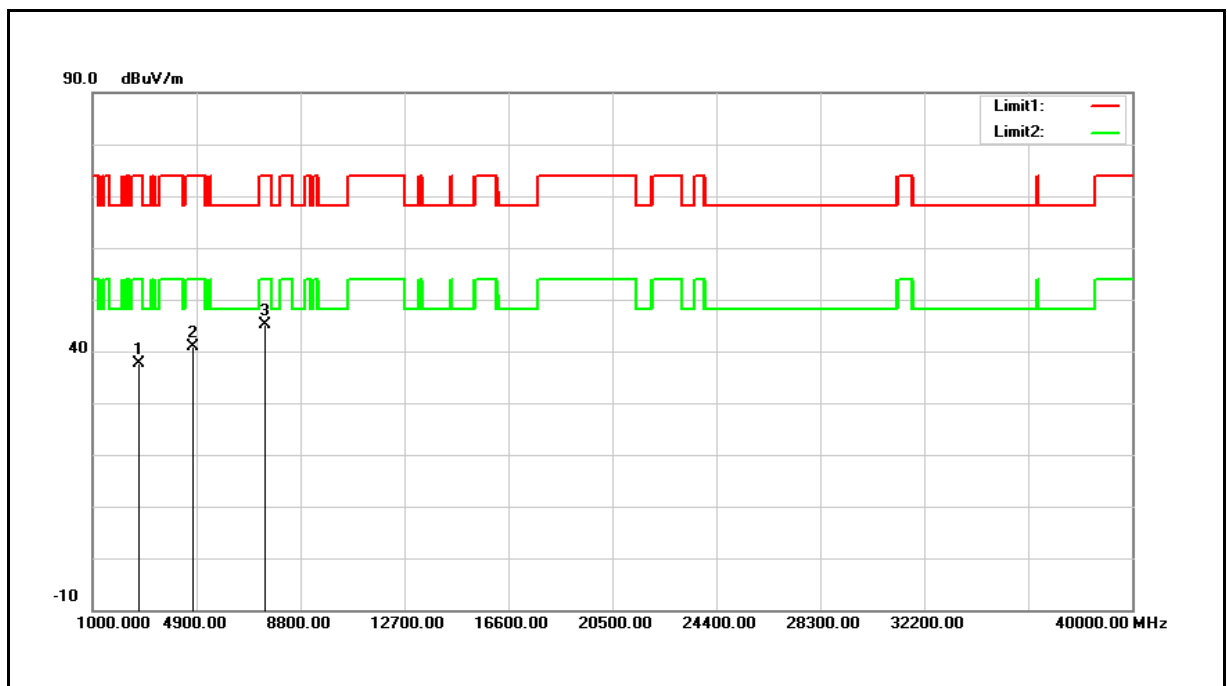


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2717.000	43.96	-6.39	37.57	74.00	-36.43	peak
2	4757.000	42.28	-1.44	40.84	74.00	-33.16	peak
3	7477.000	38.45	6.70	45.15	74.00	-28.85	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 19		
Ant.Polar.:	Horizontal		
Description:			

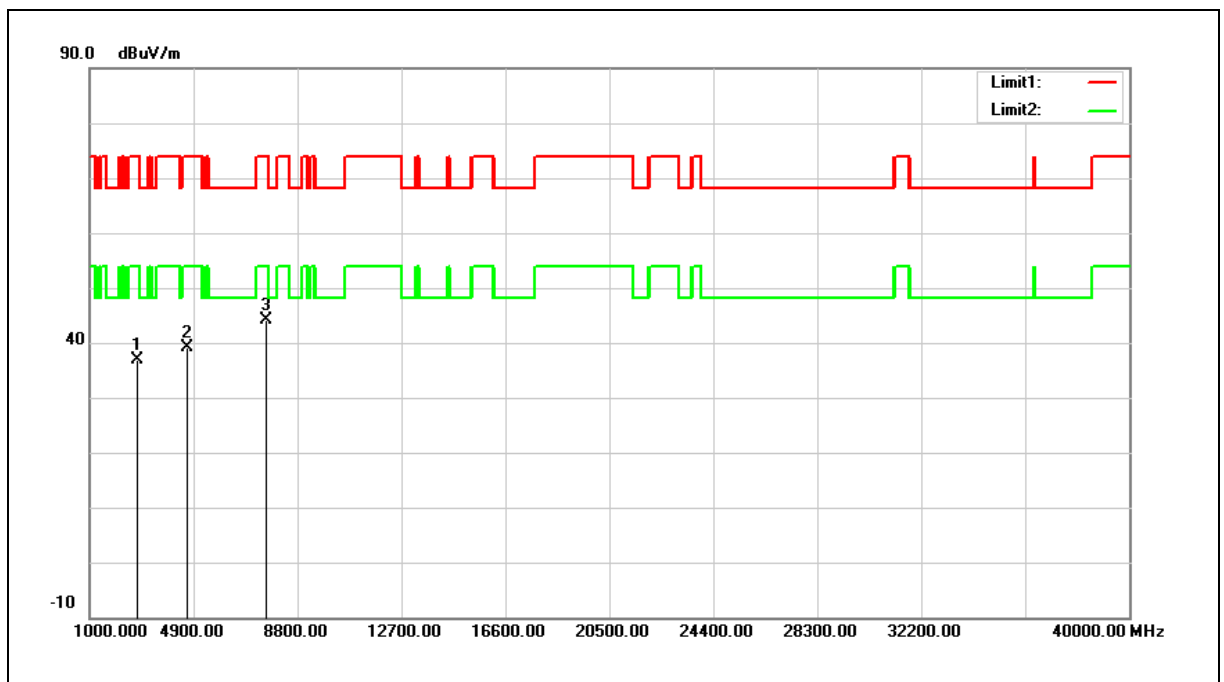


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2819.000	42.88	-5.98	36.90	74.00	-37.10	peak
2	4655.000	40.80	-1.72	39.08	74.00	-34.92	peak
3	7613.000	37.14	6.94	44.08	74.00	-29.92	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 19		
Ant.Polar.:	Vertical		
Description:			

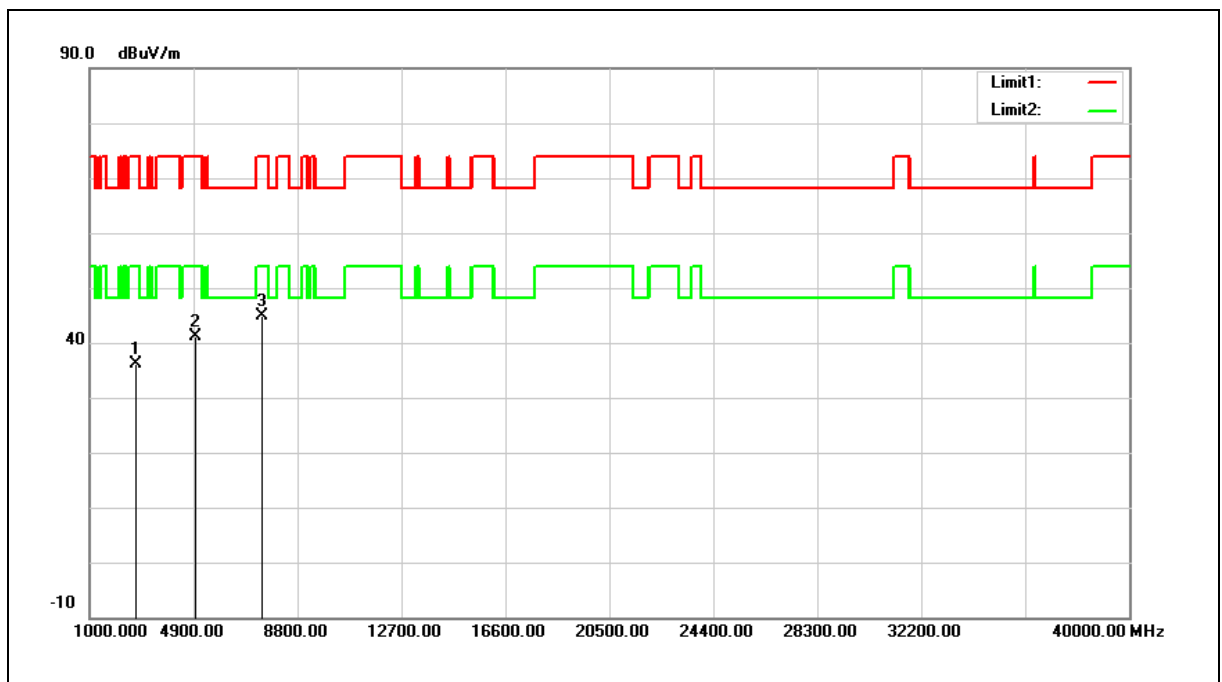

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2717.000	42.44	-6.39	36.05	74.00	-37.95	peak
2	4978.000	41.92	-0.83	41.09	74.00	-32.91	peak
3	7477.000	38.10	6.70	44.80	74.00	-29.20	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

頻帶邊緣

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

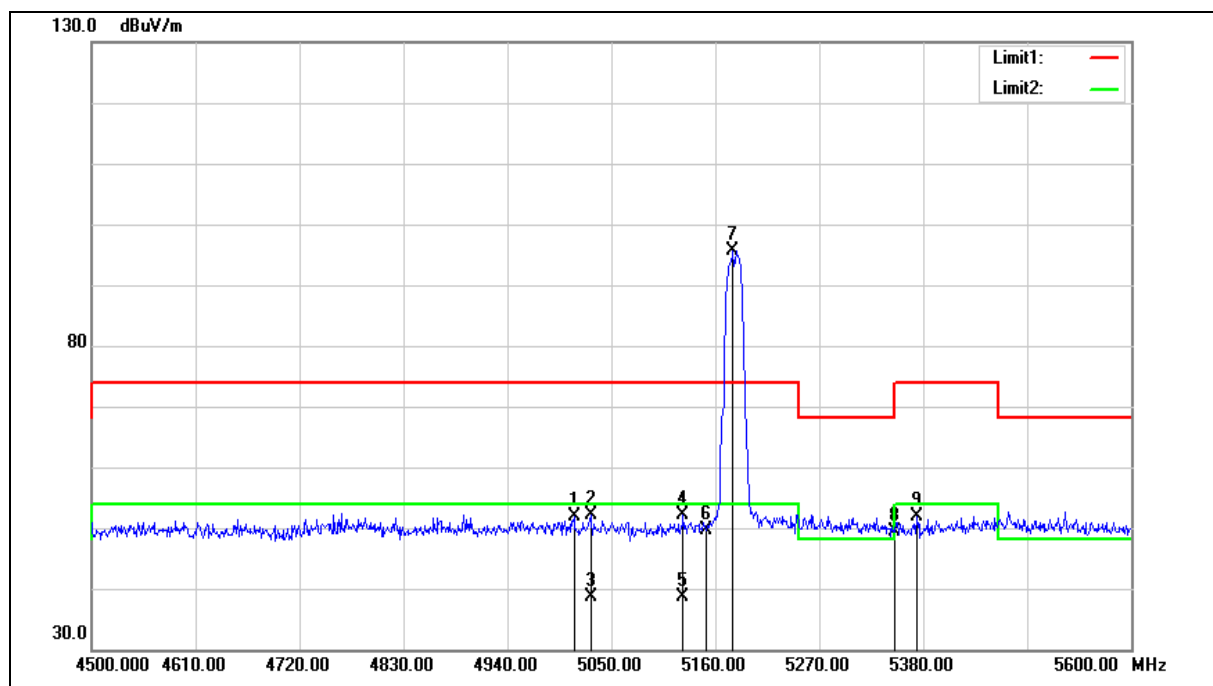

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5010.400	52.57	-0.75	51.82	74.00	-22.18	peak
2	5028.000	52.90	-0.72	52.18	74.00	-21.82	peak
3	5028.000	39.40	-0.72	38.68	54.00	-15.32	AVG
4	5125.900	52.68	-0.52	52.16	74.00	-21.84	peak
5	5125.900	39.23	-0.52	38.71	54.00	-15.29	AVG
6	5150.000	50.17	-0.48	49.69	74.00	-24.31	peak
7	5178.700	96.03	-0.42	95.61	--	--	peak
8	5350.000	49.49	-0.08	49.41	74.00	-24.59	peak
9	5373.400	51.80	-0.03	51.77	74.00	-22.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

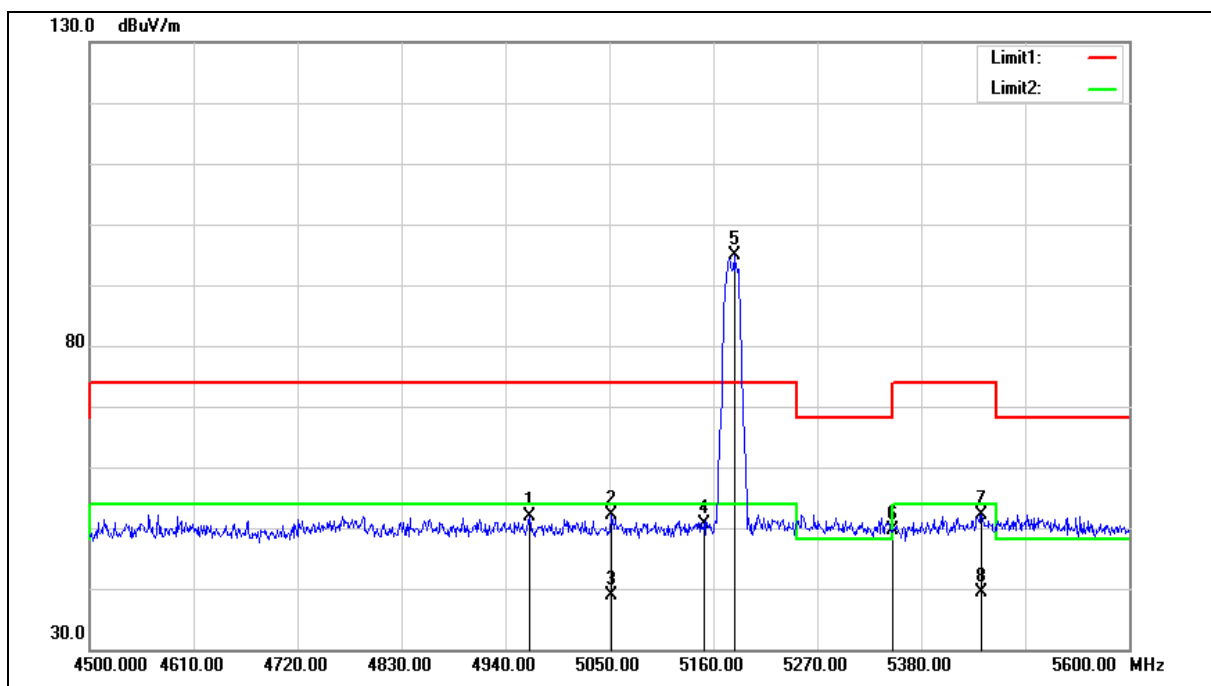

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4965.300	52.78	-0.87	51.91	74.00	-22.09	peak
2	5052.200	52.85	-0.66	52.19	74.00	-21.81	peak
3	5052.200	39.44	-0.66	38.78	54.00	-15.22	AVG
4	5150.000	51.08	-0.48	50.60	74.00	-23.40	peak
5	5182.000	95.27	-0.40	94.87	--	--	peak
6	5350.000	49.72	-0.08	49.64	74.00	-24.36	peak
7	5443.800	52.07	0.11	52.18	74.00	-21.82	peak
8	5443.800	39.32	0.11	39.43	54.00	-14.57	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

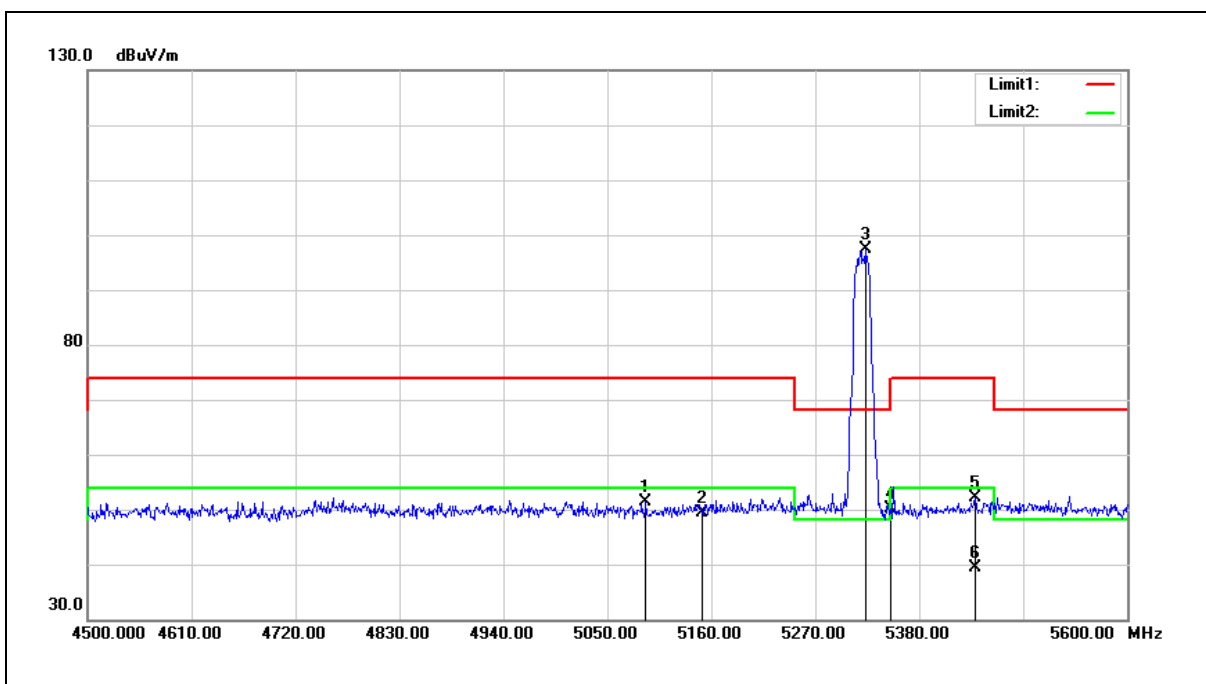


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5090.700	51.92	-0.60	51.32	74.00	-22.68	peak
2	5150.000	49.78	-0.48	49.30	74.00	-24.70	peak
3	5322.800	97.57	-0.14	97.43	--	--	peak
4	5350.000	50.13	-0.08	50.05	74.00	-23.95	peak
5	5439.400	52.00	0.09	52.09	74.00	-21.91	peak
6	5439.400	39.22	0.09	39.31	54.00	-14.69	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

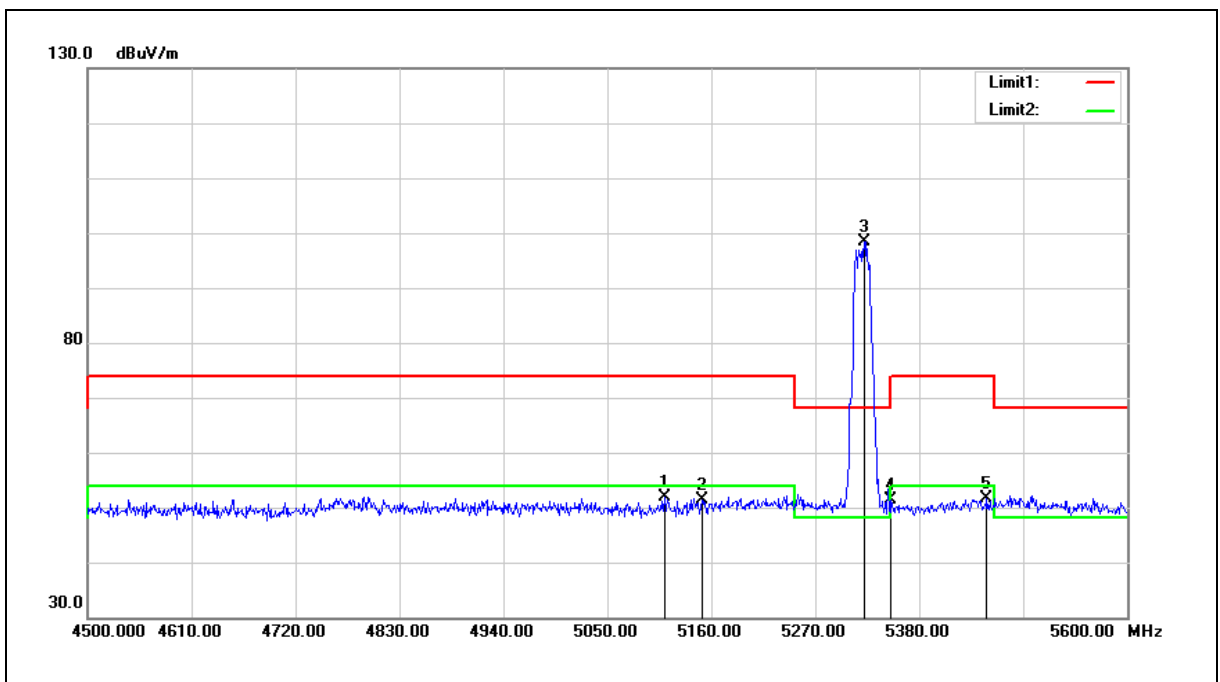


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5110.500	52.40	-0.55	51.85	74.00	-22.15	peak
2	5150.000	51.88	-0.48	51.40	74.00	-22.60	peak
3	5321.700	98.57	-0.14	98.43	--	--	peak
4	5350.000	51.54	-0.08	51.46	74.00	-22.54	peak
5	5451.500	51.57	0.12	51.69	74.00	-22.31	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

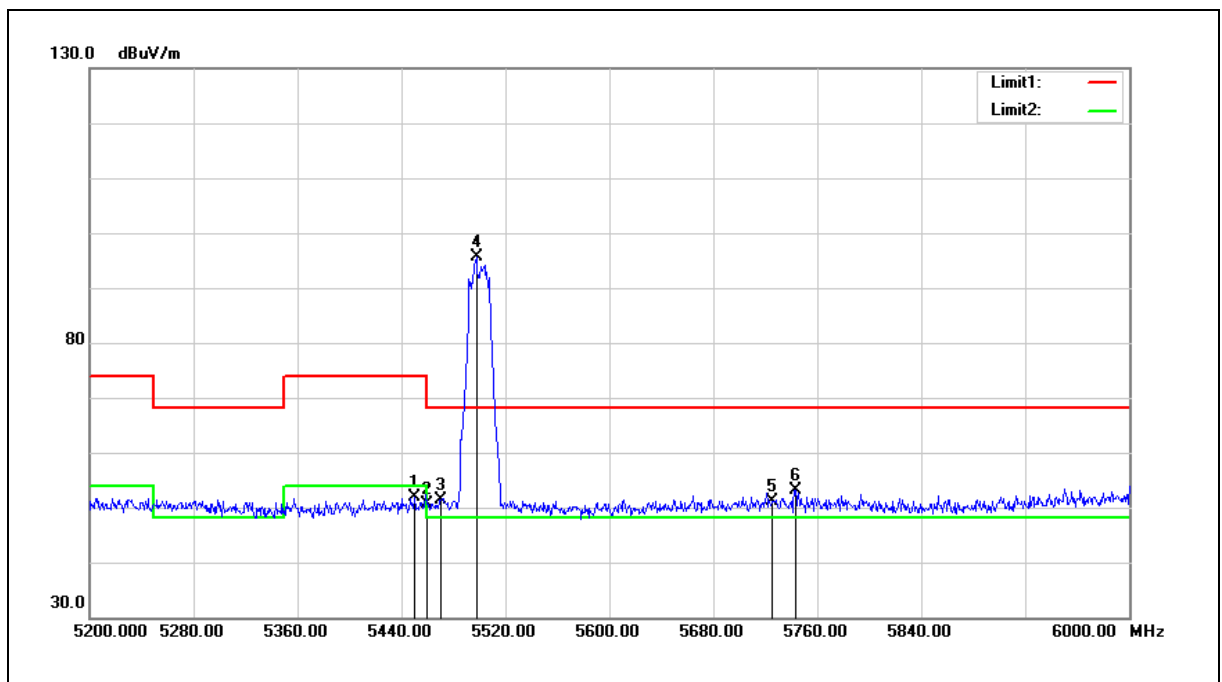


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5450.400	51.70	0.12	51.82	74.00	-22.18	peak
2	5460.000	50.40	0.14	50.54	74.00	-23.46	peak
3	5470.000	51.16	0.16	51.32	68.20	-16.88	peak
4	5497.600	95.33	0.21	95.54	--	--	peak
5	5725.000	50.26	0.82	51.08	68.20	-17.12	peak
6	5743.200	52.18	0.87	53.05	68.20	-15.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

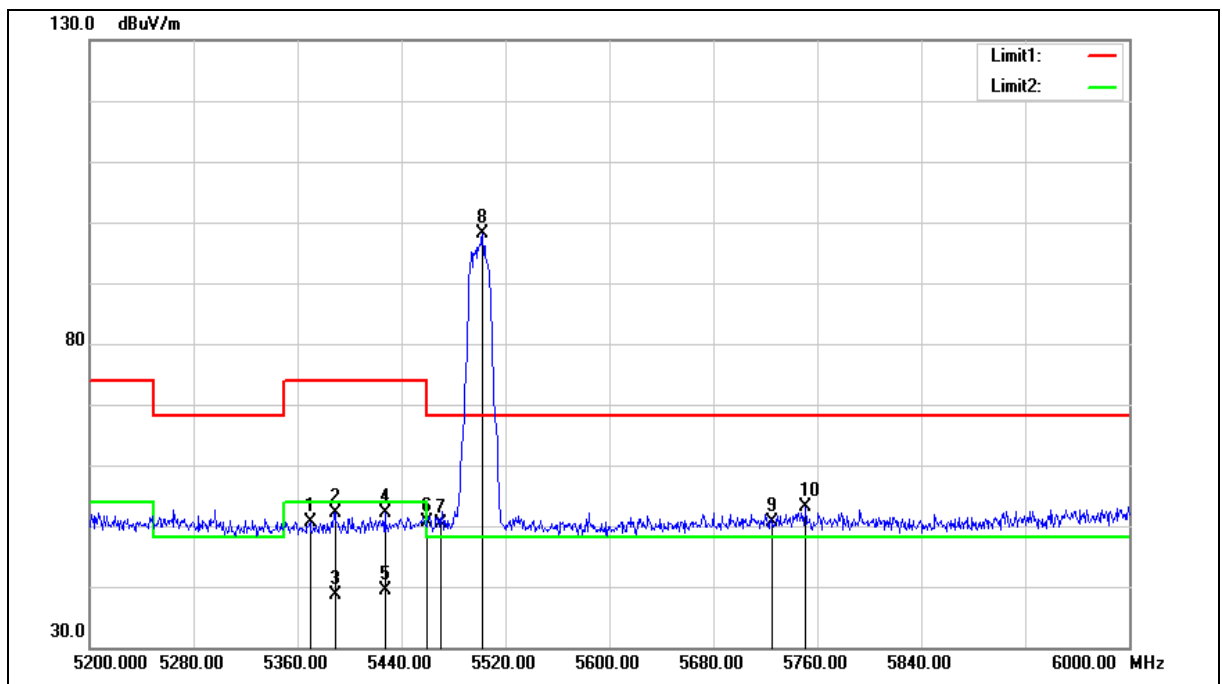

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5369.600	50.61	-0.03	50.58	74.00	-23.42	peak
2	5388.800	52.20	0.00	52.20	74.00	-21.80	peak
3	5388.800	38.75	0.00	38.75	54.00	-15.25	AVG
4	5427.200	51.98	0.07	52.05	74.00	-21.95	peak
5	5427.200	39.26	0.07	39.33	54.00	-14.67	AVG
6	5460.000	50.50	0.14	50.64	74.00	-23.36	peak
7	5470.000	50.19	0.16	50.35	68.20	-17.85	peak
8	5502.400	97.94	0.22	98.16	--	--	peak
9	5725.000	49.73	0.82	50.55	68.20	-17.65	peak
10	5751.200	52.18	0.90	53.08	68.20	-15.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

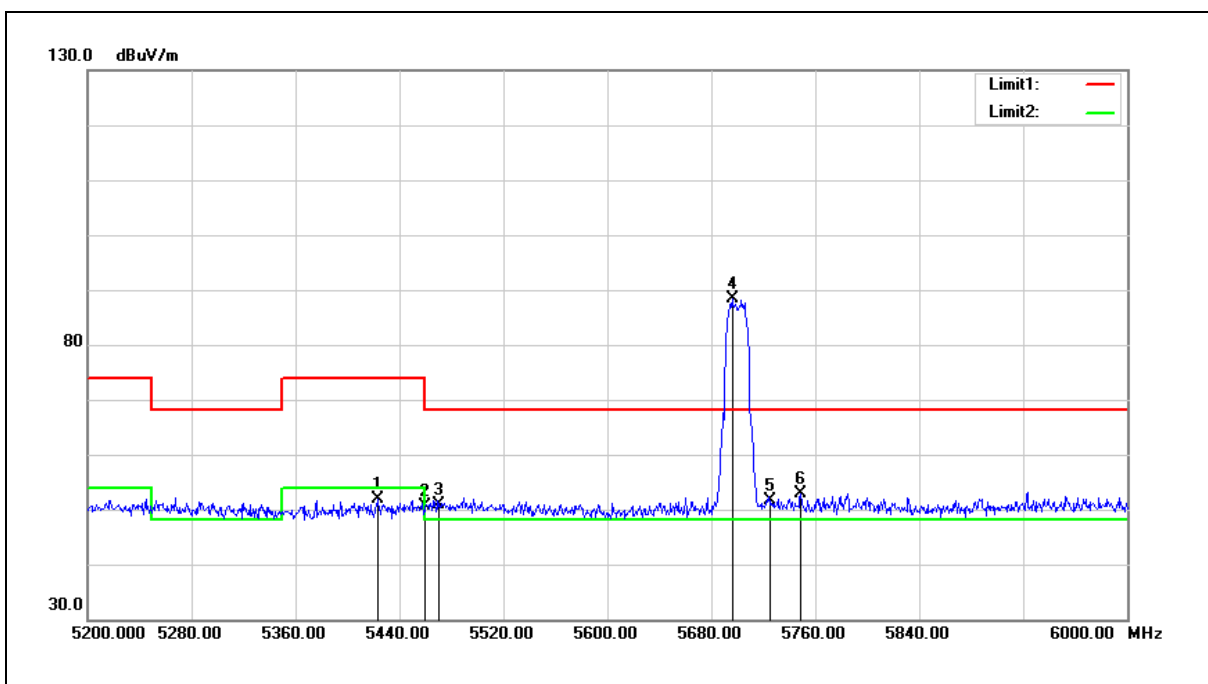


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5423.200	51.81	0.06	51.87	74.00	-22.13	peak
2	5460.000	50.57	0.14	50.71	74.00	-23.29	peak
3	5470.000	50.81	0.16	50.97	68.20	-17.23	peak
4	5696.000	87.71	0.74	88.45	--	--	peak
5	5725.000	50.79	0.82	51.61	68.20	-16.59	peak
6	5748.800	51.88	0.89	52.77	68.20	-15.43	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

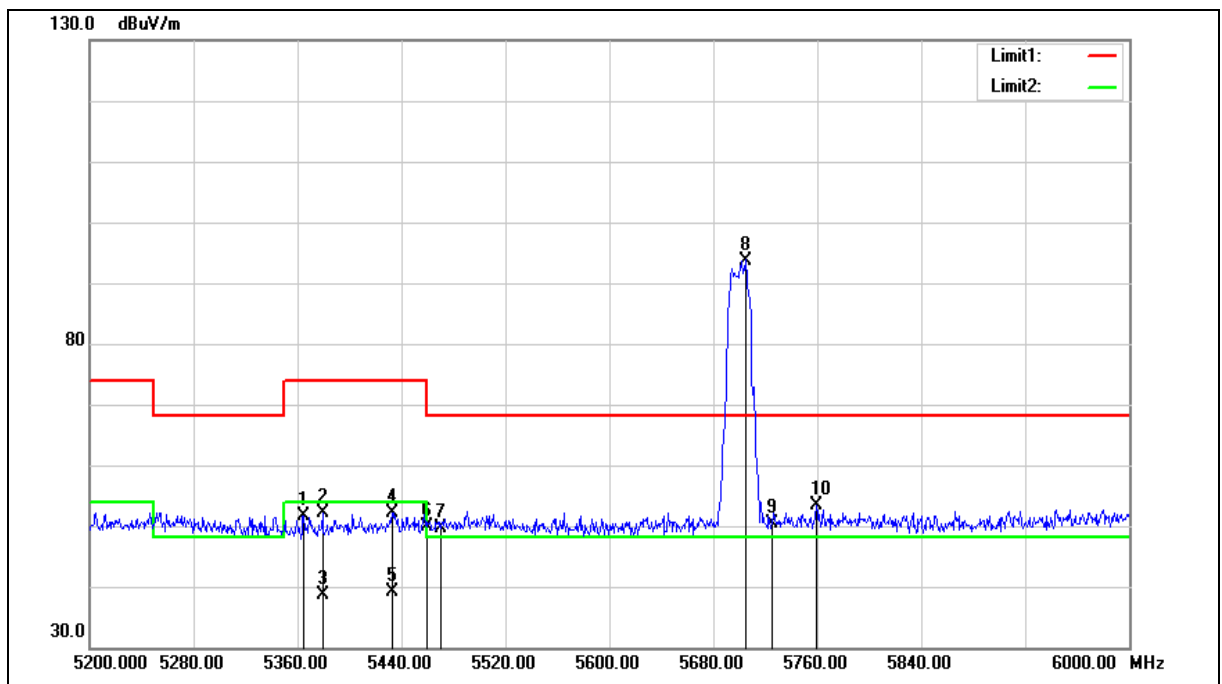

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5364.800	51.68	-0.05	51.63	74.00	-22.37	peak
2	5379.200	52.23	-0.03	52.20	74.00	-21.80	peak
3	5379.200	38.59	-0.03	38.56	54.00	-15.44	AVG
4	5432.800	51.98	0.09	52.07	74.00	-21.93	peak
5	5432.800	39.12	0.09	39.21	54.00	-14.79	AVG
6	5460.000	49.62	0.14	49.76	74.00	-24.24	peak
7	5470.000	49.57	0.16	49.73	68.20	-18.47	peak
8	5704.800	92.97	0.78	93.75	--	--	peak
9	5725.000	49.50	0.82	50.32	68.20	-17.88	peak
10	5759.200	52.46	0.91	53.37	68.20	-14.83	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

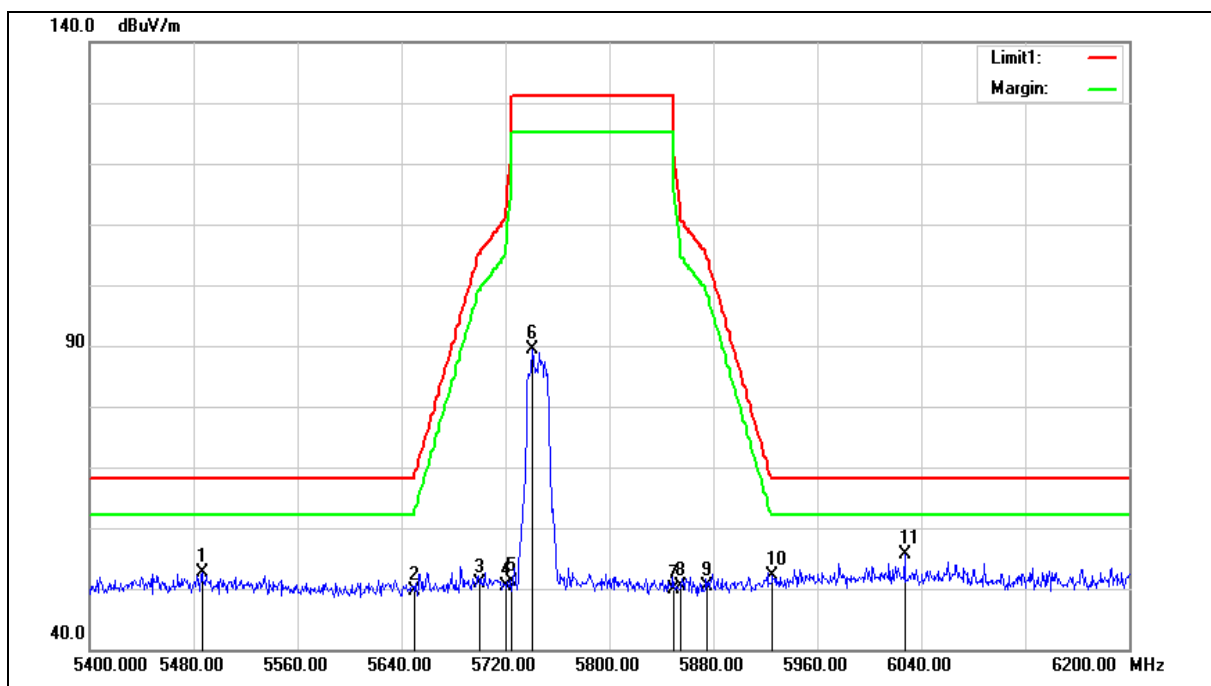

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5486.400	52.51	0.19	52.70	68.20	-15.50	peak
2	5650.000	48.94	0.62	49.56	68.20	-18.64	peak
3	5700.000	50.13	0.75	50.88	105.20	-54.32	peak
4	5720.000	49.58	0.81	50.39	110.80	-60.41	peak
5	5725.000	50.23	0.82	51.05	122.20	-71.15	peak
6	5740.800	88.51	0.87	89.38	--	--	peak
7	5850.000	48.80	1.17	49.97	122.20	-72.23	peak
8	5855.000	49.31	1.18	50.49	110.80	-60.31	peak
9	5875.000	49.22	1.23	50.45	105.20	-54.75	peak
10	5925.000	50.76	1.37	52.13	68.20	-16.07	peak
11	6027.200	53.87	1.66	55.53	68.20	-12.67	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

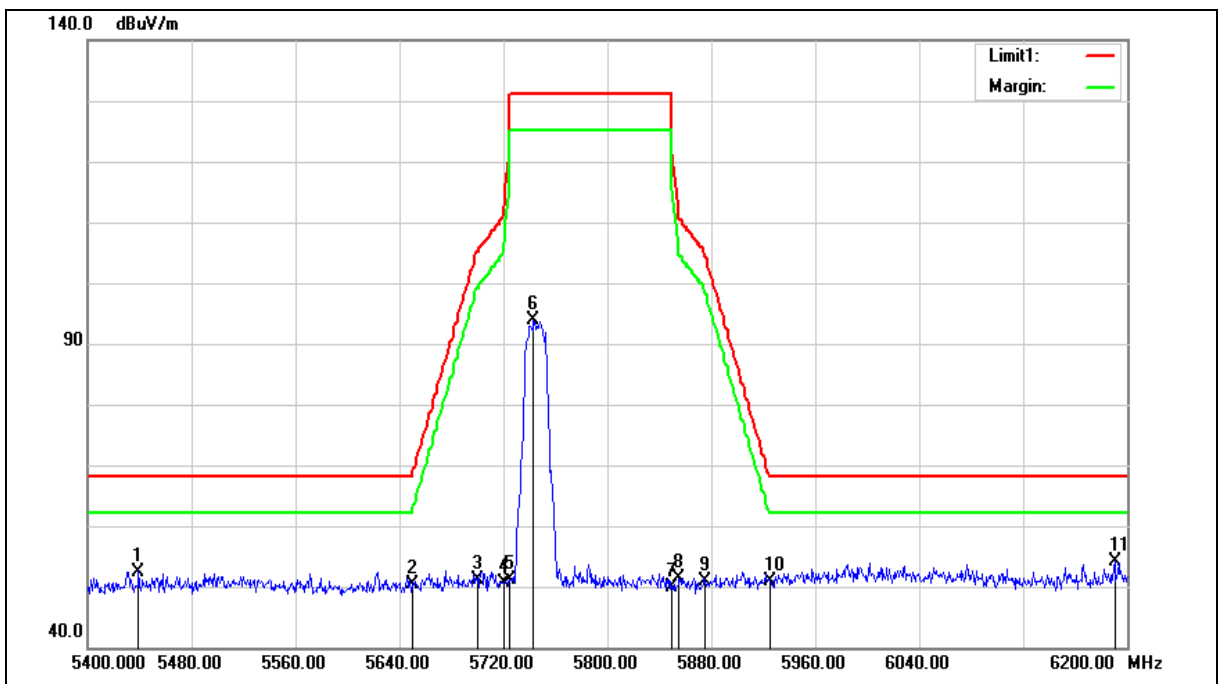

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5439.200	52.41	0.09	52.50	68.20	-15.70	peak
2	5650.000	49.76	0.62	50.38	68.20	-17.82	peak
3	5700.000	50.50	0.75	51.25	105.20	-53.95	peak
4	5720.000	49.93	0.81	50.74	110.80	-60.06	peak
5	5725.000	50.19	0.82	51.01	122.20	-71.19	peak
6	5743.200	92.91	0.87	93.78	--	--	peak
7	5850.000	48.77	1.17	49.94	122.20	-72.26	peak
8	5855.000	50.18	1.18	51.36	110.80	-59.44	peak
9	5875.000	49.66	1.23	50.89	105.20	-54.31	peak
10	5925.000	49.63	1.37	51.00	68.20	-17.20	peak
11	6190.400	51.87	2.24	54.11	68.20	-14.09	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		

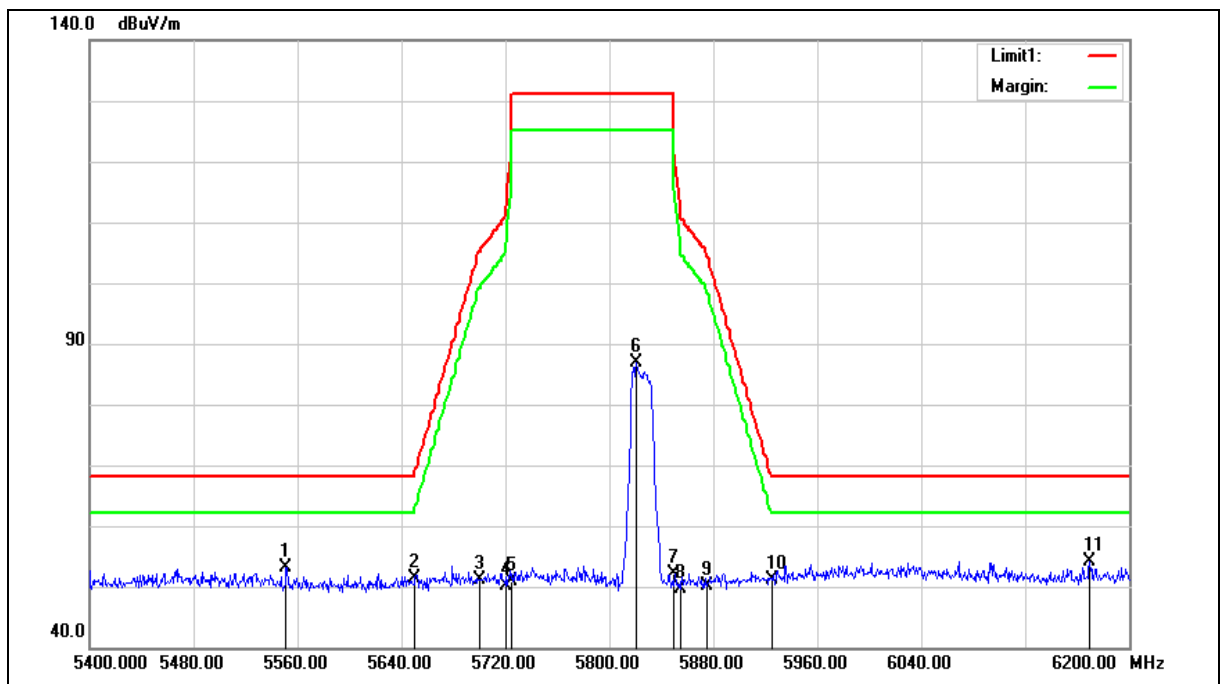

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 8		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5551.200	52.85	0.35	53.20	68.20	-15.00	peak
2	5650.000	50.78	0.62	51.40	68.20	-16.80	peak
3	5700.000	50.28	0.75	51.03	105.20	-54.17	peak
4	5720.000	49.37	0.81	50.18	110.80	-60.62	peak
5	5725.000	50.10	0.82	50.92	122.20	-71.28	peak
6	5820.800	85.70	1.08	86.78	--	--	peak
7	5850.000	50.91	1.17	52.08	122.20	-70.12	peak
8	5855.000	48.56	1.18	49.74	110.80	-61.06	peak
9	5875.000	48.84	1.23	50.07	105.20	-55.13	peak
10	5925.000	49.73	1.37	51.10	68.20	-17.10	peak
11	6169.600	51.99	2.17	54.16	68.20	-14.04	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		

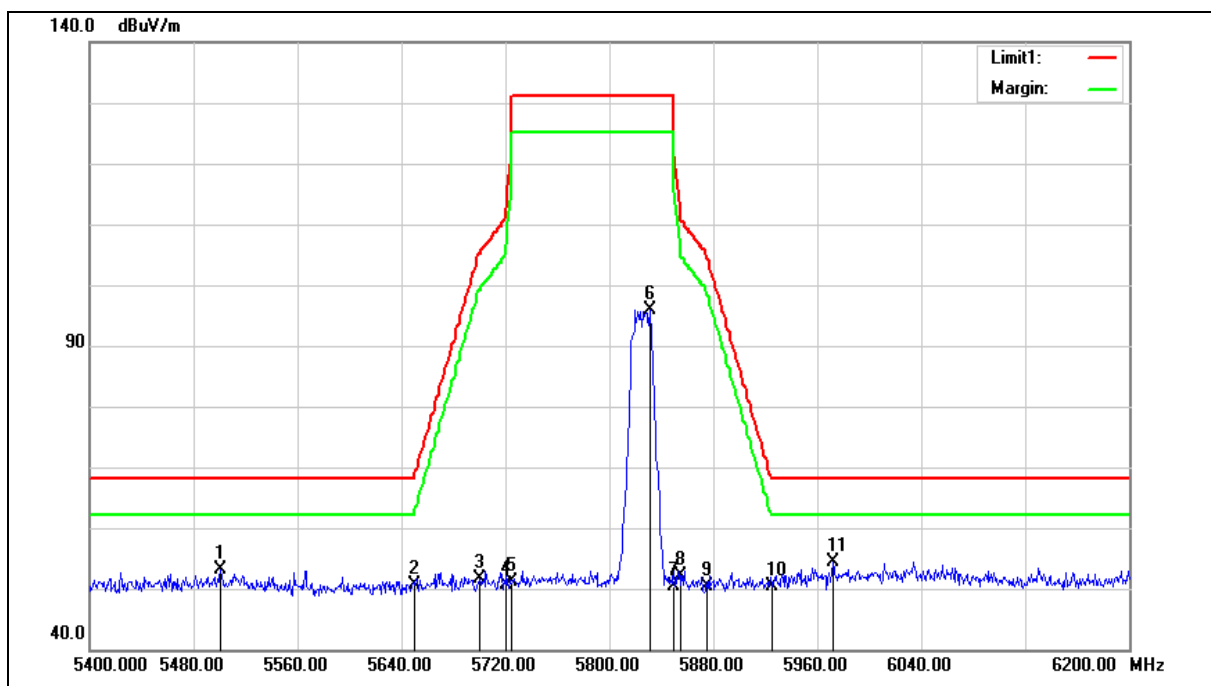

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 8		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5500.800	52.87	0.22	53.09	68.20	-15.11	peak
2	5650.000	49.97	0.62	50.59	68.20	-17.61	peak
3	5700.000	50.76	0.75	51.51	105.20	-53.69	peak
4	5720.000	49.81	0.81	50.62	110.80	-60.18	peak
5	5725.000	50.33	0.82	51.15	122.20	-71.05	peak
6	5831.200	94.88	1.11	95.99	--	--	peak
7	5850.000	49.22	1.17	50.39	122.20	-71.81	peak
8	5855.000	51.02	1.18	52.20	110.80	-58.60	peak
9	5875.000	49.12	1.23	50.35	105.20	-54.85	peak
10	5925.000	49.10	1.37	50.47	68.20	-17.73	peak
11	5972.000	52.85	1.50	54.35	68.20	-13.85	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

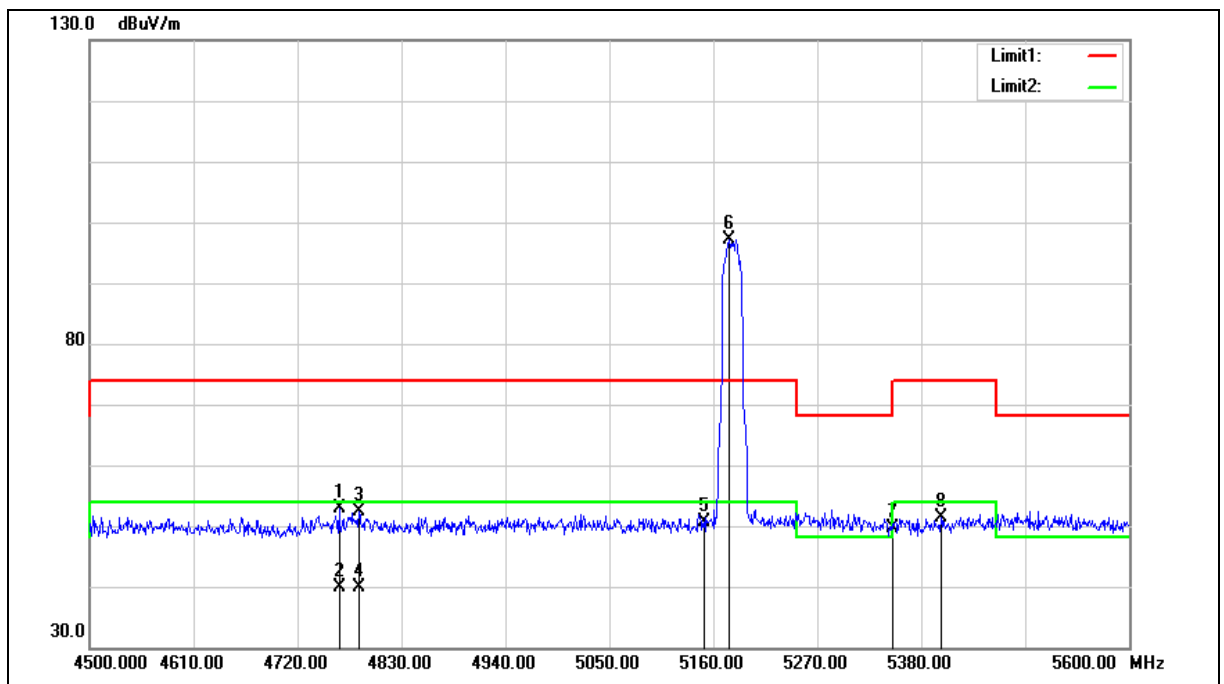

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4764.000	54.25	-1.41	52.84	74.00	-21.16	peak
2	4764.000	41.22	-1.41	39.81	54.00	-14.19	AVG
3	4784.900	53.85	-1.36	52.49	74.00	-21.51	peak
4	4784.900	41.22	-1.36	39.86	54.00	-14.14	AVG
5	5150.000	51.12	-0.48	50.64	74.00	-23.36	peak
6	5176.500	97.48	-0.43	97.05	--	--	peak
7	5350.000	49.75	-0.08	49.67	74.00	-24.33	peak
8	5400.900	51.32	0.02	51.34	74.00	-22.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

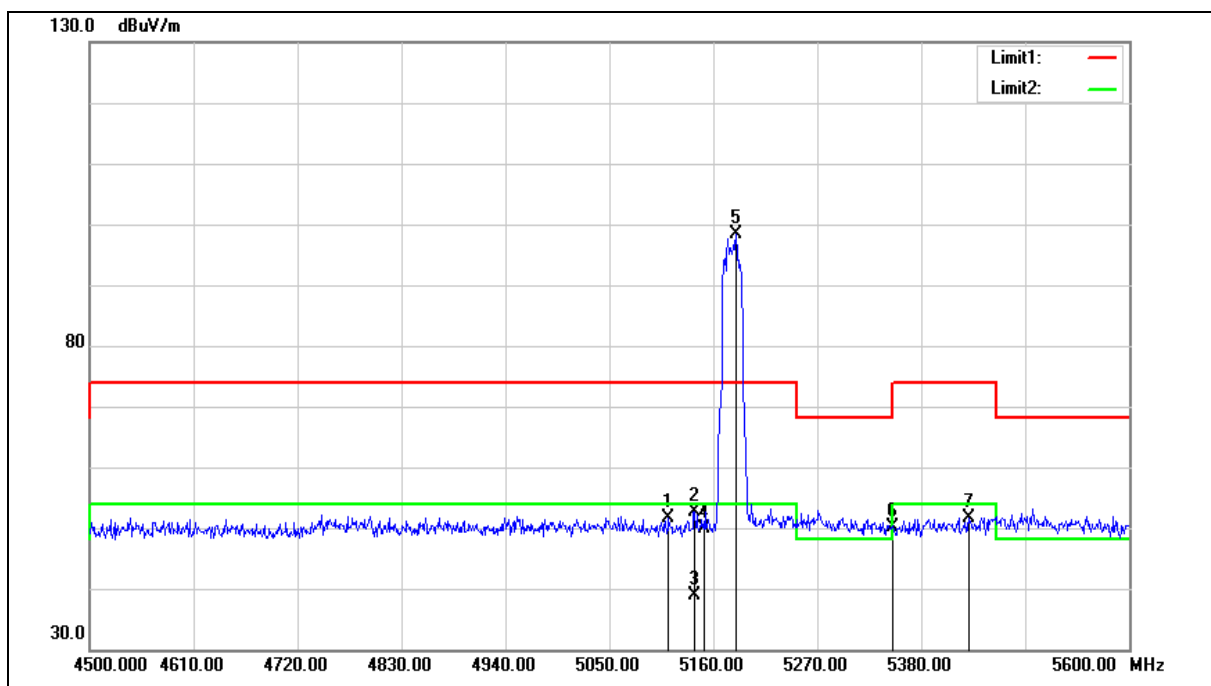

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5112.700	52.08	-0.55	51.53	74.00	-22.47	peak
2	5140.200	53.23	-0.49	52.74	74.00	-21.26	peak
3	5140.200	39.44	-0.49	38.95	54.00	-15.05	AVG
4	5150.000	50.46	-0.48	49.98	74.00	-24.02	peak
5	5184.200	98.66	-0.40	98.26	--	--	peak
6	5350.000	50.11	-0.08	50.03	74.00	-23.97	peak
7	5430.600	51.67	0.08	51.75	74.00	-22.25	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

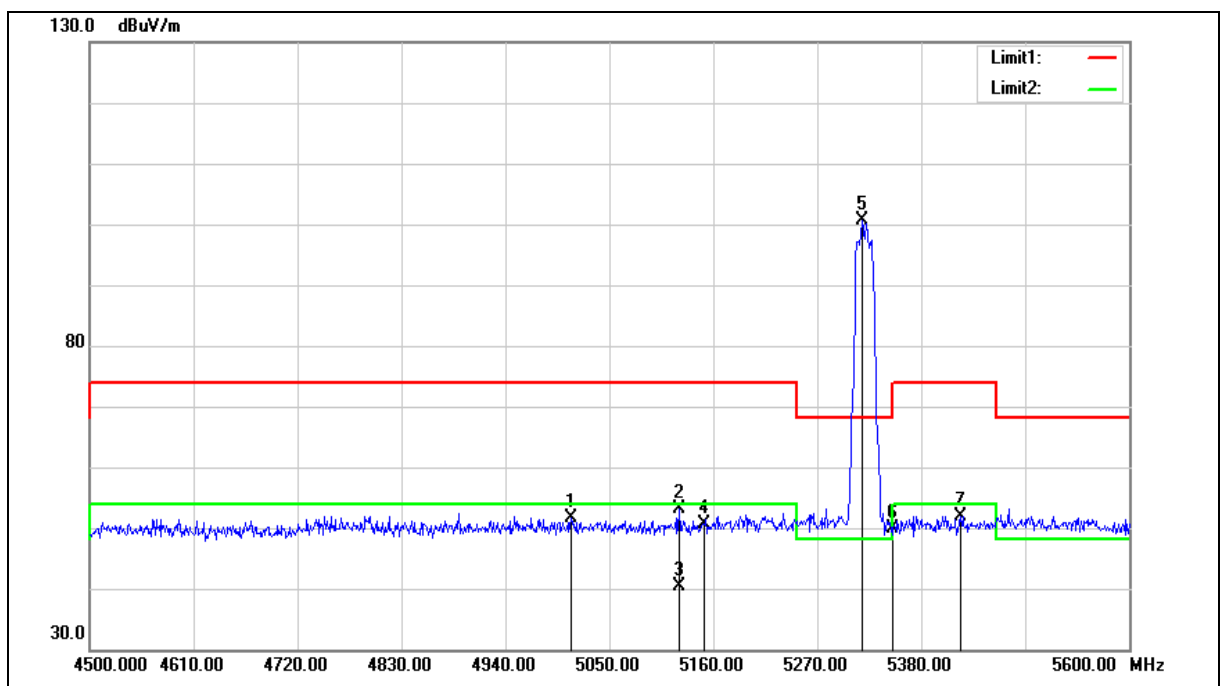

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5009.300	52.41	-0.75	51.66	74.00	-22.34	peak
2	5123.700	53.53	-0.52	53.01	74.00	-20.99	peak
3	5123.700	40.85	-0.52	40.33	54.00	-13.67	AVG
4	5150.000	51.16	-0.48	50.68	74.00	-23.32	peak
5	5317.300	100.71	-0.15	100.56	--	--	peak
6	5350.000	49.92	-0.08	49.84	74.00	-24.16	peak
7	5421.800	51.91	0.06	51.97	74.00	-22.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

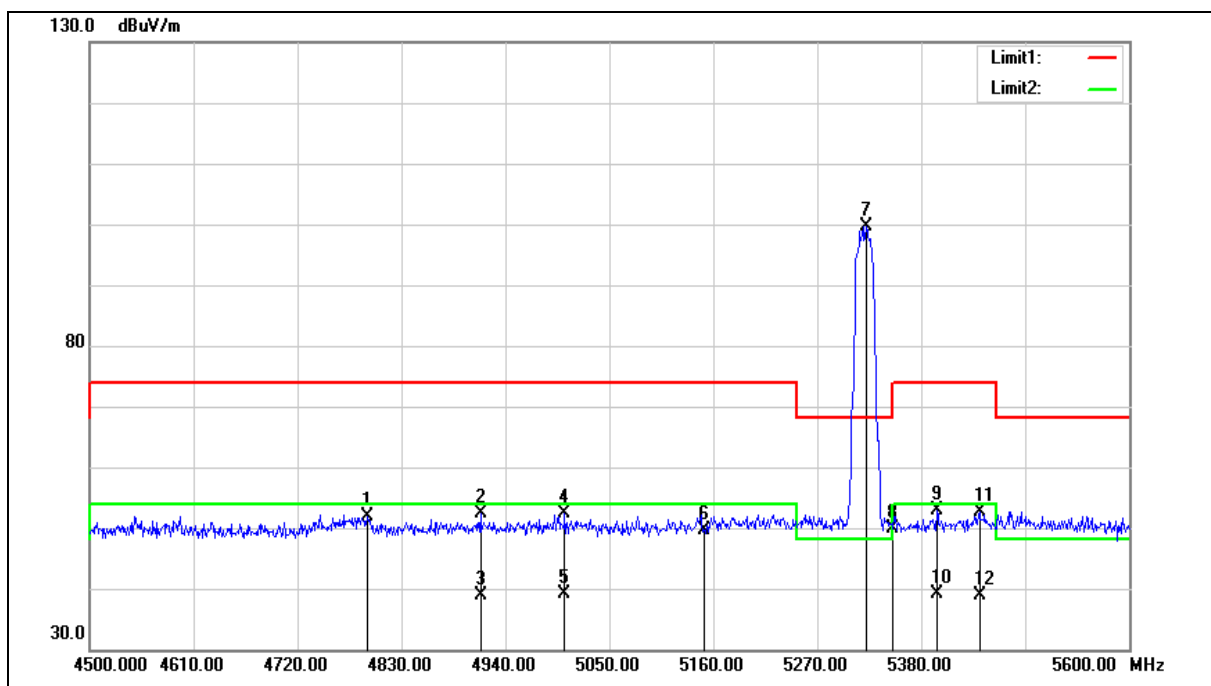

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4793.700	53.29	-1.34	51.95	74.00	-22.05	peak
2	4913.600	53.35	-1.01	52.34	74.00	-21.66	peak
3	4913.600	39.90	-1.01	38.89	54.00	-15.11	AVG
4	5002.700	53.16	-0.77	52.39	74.00	-21.61	peak
5	5002.700	39.85	-0.77	39.08	54.00	-14.92	AVG
6	5150.000	50.15	-0.48	49.67	74.00	-24.33	peak
7	5321.700	99.72	-0.14	99.58	--	--	peak
8	5350.000	50.05	-0.08	49.97	74.00	-24.03	peak
9	5396.500	52.80	0.01	52.81	74.00	-21.19	peak
10	5396.500	39.08	0.01	39.09	54.00	-14.91	AVG
11	5441.600	52.60	0.09	52.69	74.00	-21.31	peak
12	5441.600	38.68	0.09	38.77	54.00	-15.23	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

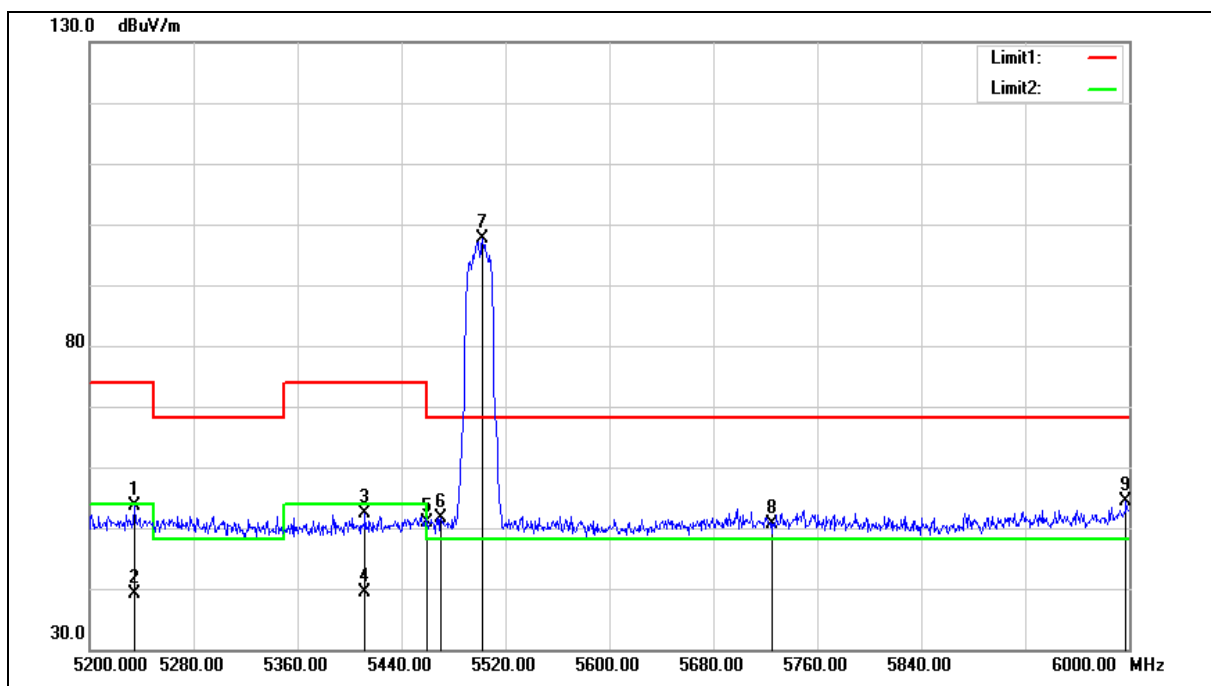

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5234.400	53.97	-0.31	53.66	74.00	-20.34	peak
2	5234.400	39.38	-0.31	39.07	54.00	-14.93	AVG
3	5412.000	52.24	0.04	52.28	74.00	-21.72	peak
4	5412.000	39.39	0.04	39.43	54.00	-14.57	AVG
5	5460.000	50.73	0.14	50.87	74.00	-23.13	peak
6	5470.000	51.42	0.16	51.58	68.20	-16.62	peak
7	5502.400	97.30	0.22	97.52	--	--	peak
8	5725.000	49.86	0.82	50.68	68.20	-17.52	peak
9	5997.600	52.84	1.57	54.41	68.20	-13.79	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

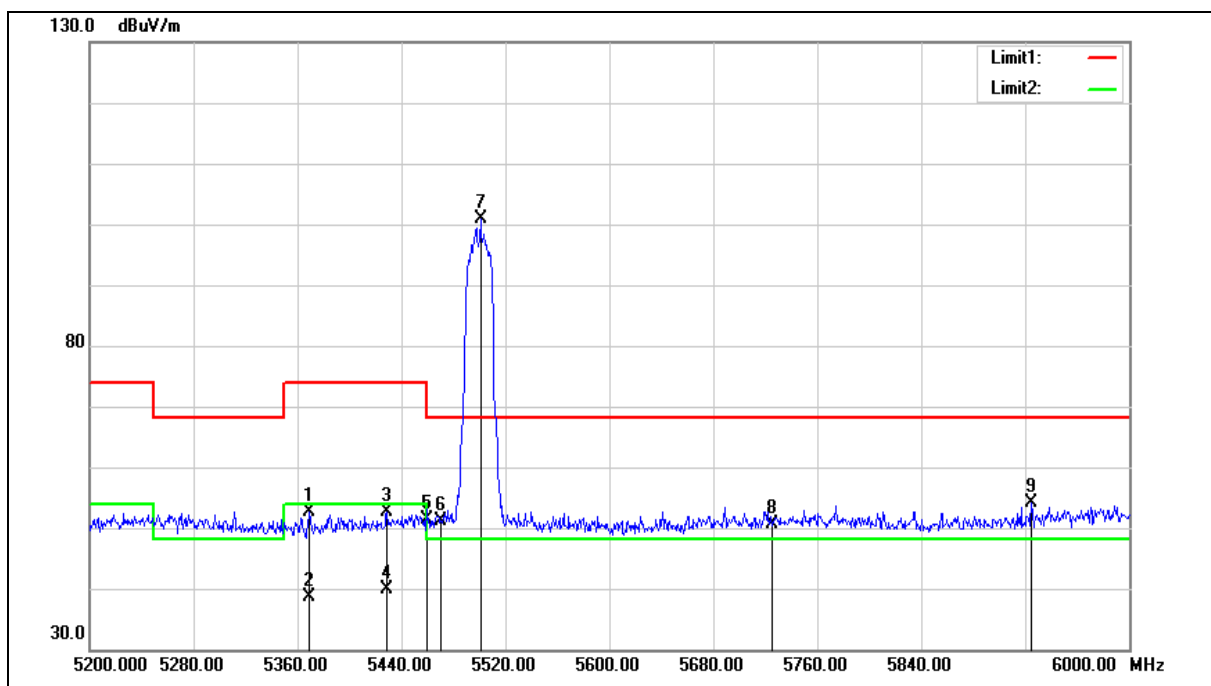

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5368.800	52.57	-0.04	52.53	74.00	-21.47	peak
2	5368.800	38.65	-0.04	38.61	54.00	-15.39	AVG
3	5428.800	52.50	0.08	52.58	74.00	-21.42	peak
4	5428.800	39.68	0.08	39.76	54.00	-14.24	AVG
5	5460.000	51.14	0.14	51.28	74.00	-22.72	peak
6	5470.000	50.86	0.16	51.02	68.20	-17.18	peak
7	5500.800	100.57	0.22	100.79	--	--	peak
8	5725.000	49.93	0.82	50.75	68.20	-17.45	peak
9	5924.800	52.81	1.37	54.18	68.20	-14.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

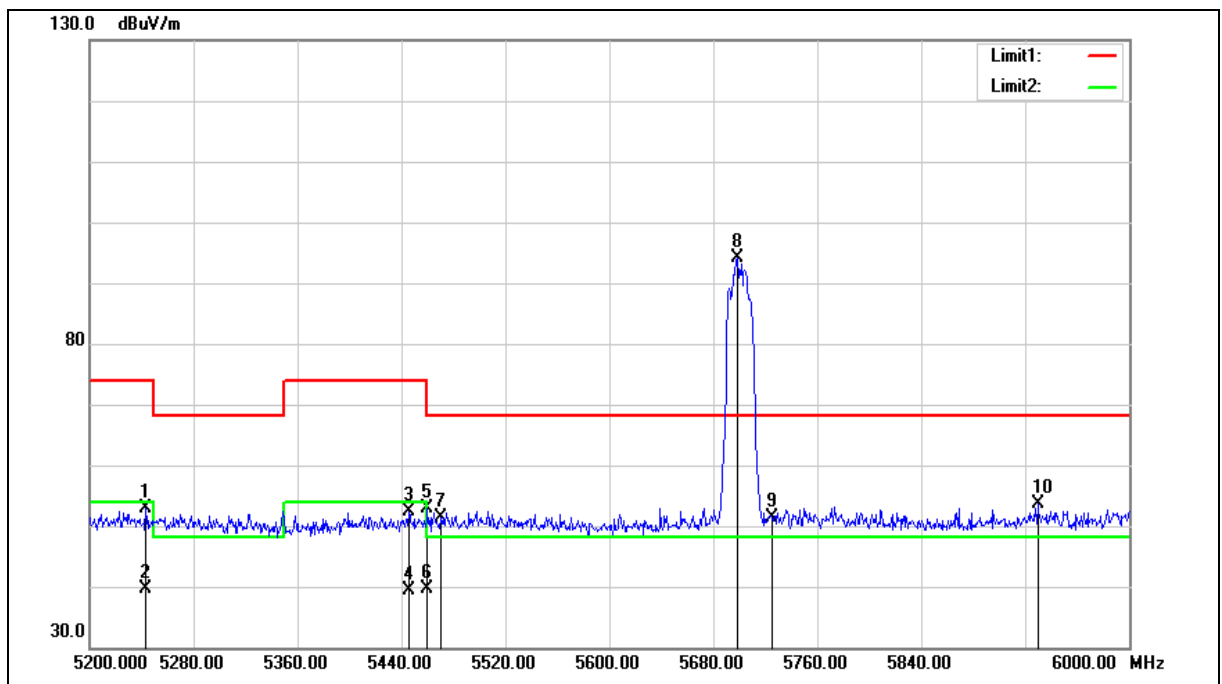

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5243.200	53.14	-0.29	52.85	74.00	-21.15	peak
2	5243.200	39.94	-0.29	39.65	54.00	-14.35	AVG
3	5445.600	52.18	0.11	52.29	74.00	-21.71	peak
4	5445.600	39.30	0.11	39.41	54.00	-14.59	AVG
5	5460.000	52.76	0.14	52.90	74.00	-21.10	peak
6	5460.000	39.43	0.14	39.57	54.00	-14.43	AVG
7	5470.000	51.10	0.16	51.26	68.20	-16.94	peak
8	5698.400	93.41	0.75	94.16	--	--	peak
9	5725.000	50.66	0.82	51.48	68.20	-16.72	peak
10	5929.600	52.18	1.38	53.56	68.20	-14.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

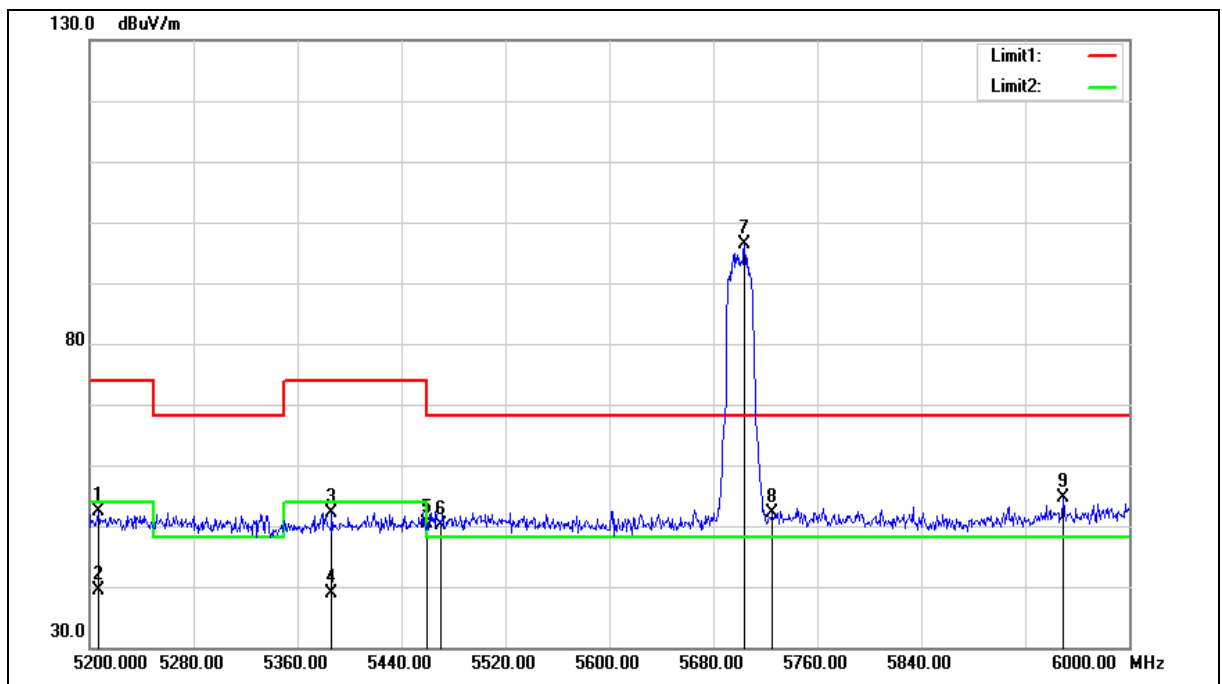

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5207.200	52.63	-0.36	52.27	74.00	-21.73	peak
2	5207.200	39.83	-0.36	39.47	54.00	-14.53	AVG
3	5386.400	52.24	0.00	52.24	74.00	-21.76	peak
4	5386.400	38.77	0.00	38.77	54.00	-15.23	AVG
5	5460.000	50.22	0.14	50.36	74.00	-23.64	peak
6	5470.000	50.04	0.16	50.20	68.20	-18.00	peak
7	5704.000	95.51	0.78	96.29	--	--	peak
8	5725.000	51.19	0.82	52.01	68.20	-16.19	peak
9	5949.600	53.22	1.44	54.66	68.20	-13.54	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

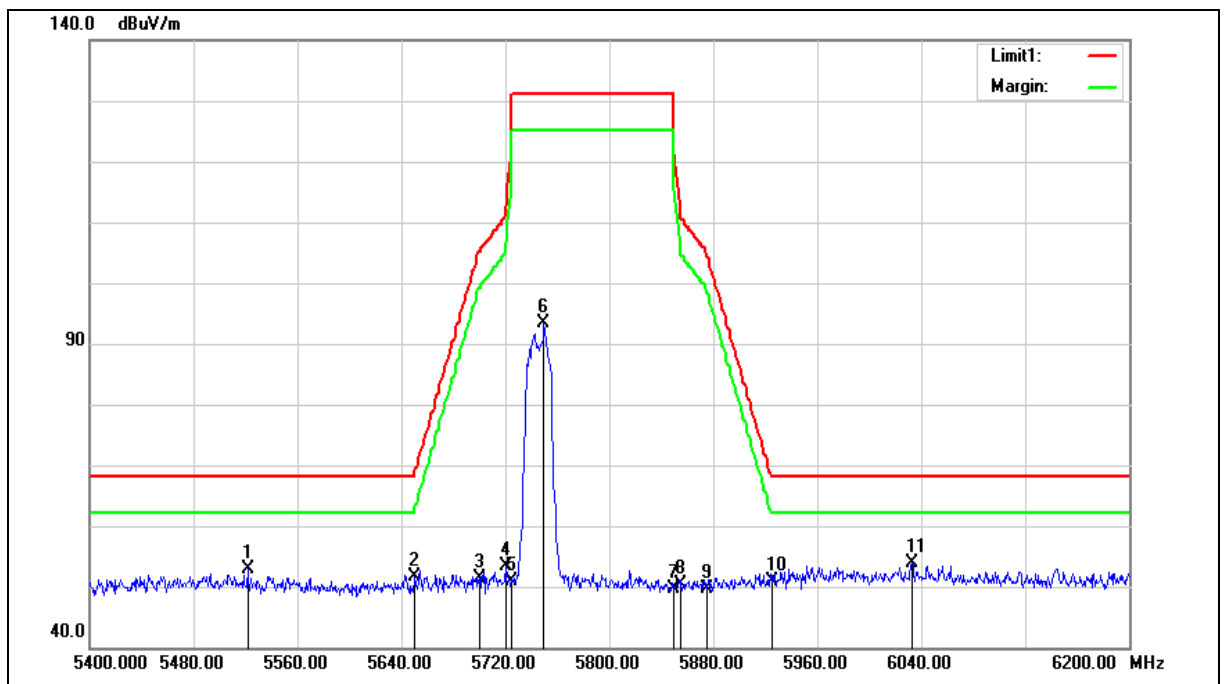

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5521.600	52.62	0.27	52.89	68.20	-15.31	peak
2	5650.000	51.08	0.62	51.70	68.20	-16.50	peak
3	5700.000	50.73	0.75	51.48	105.20	-53.72	peak
4	5720.000	52.48	0.81	53.29	110.80	-57.51	peak
5	5725.000	50.15	0.82	50.97	122.20	-71.23	peak
6	5749.600	92.38	0.89	93.27	--	--	peak
7	5850.000	48.38	1.17	49.55	122.20	-72.65	peak
8	5855.000	49.21	1.18	50.39	110.80	-60.41	peak
9	5875.000	48.36	1.23	49.59	105.20	-55.61	peak
10	5925.000	49.53	1.37	50.90	68.20	-17.30	peak
11	6032.800	52.23	1.69	53.92	68.20	-14.28	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

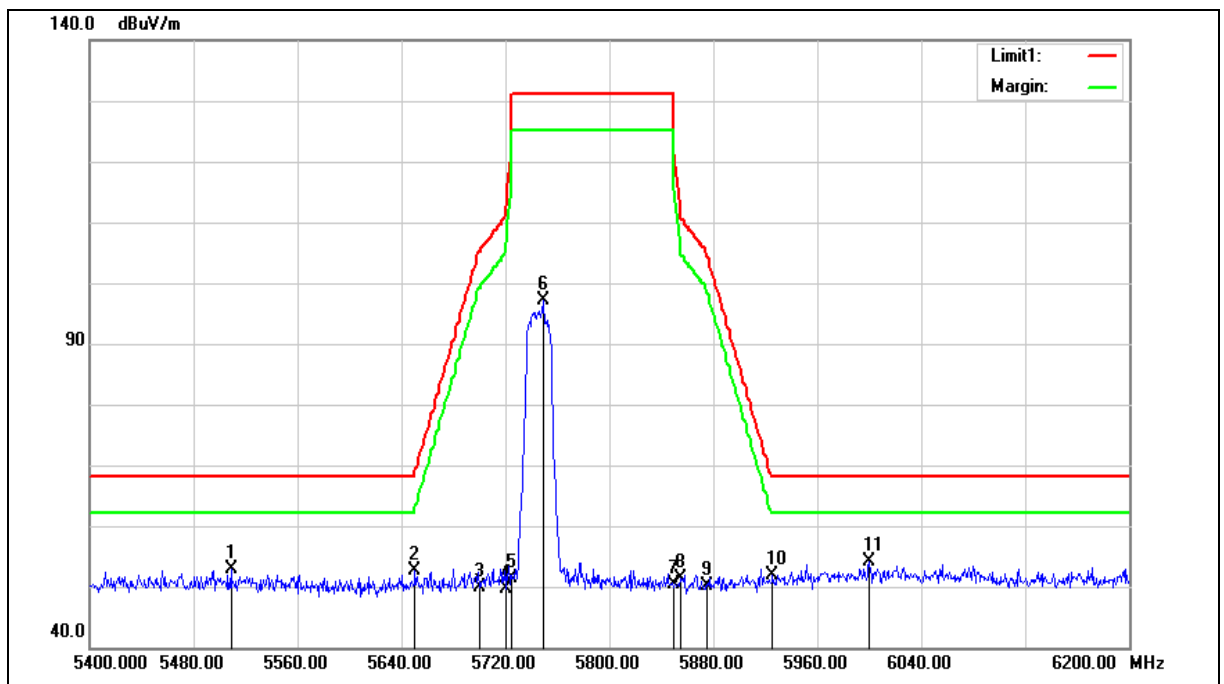

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5508.800	52.70	0.23	52.93	68.20	-15.27	peak
2	5650.000	52.01	0.62	52.63	68.20	-15.57	peak
3	5700.000	49.11	0.75	49.86	105.20	-55.34	peak
4	5720.000	48.89	0.81	49.70	110.80	-61.10	peak
5	5725.000	50.58	0.82	51.40	122.20	-70.80	peak
6	5748.800	96.24	0.89	97.13	--	--	peak
7	5850.000	49.15	1.17	50.32	122.20	-71.88	peak
8	5855.000	50.20	1.18	51.38	110.80	-59.42	peak
9	5875.000	48.86	1.23	50.09	105.20	-55.11	peak
10	5925.000	50.56	1.37	51.93	68.20	-16.27	peak
11	6000.000	52.44	1.57	54.01	68.20	-14.19	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

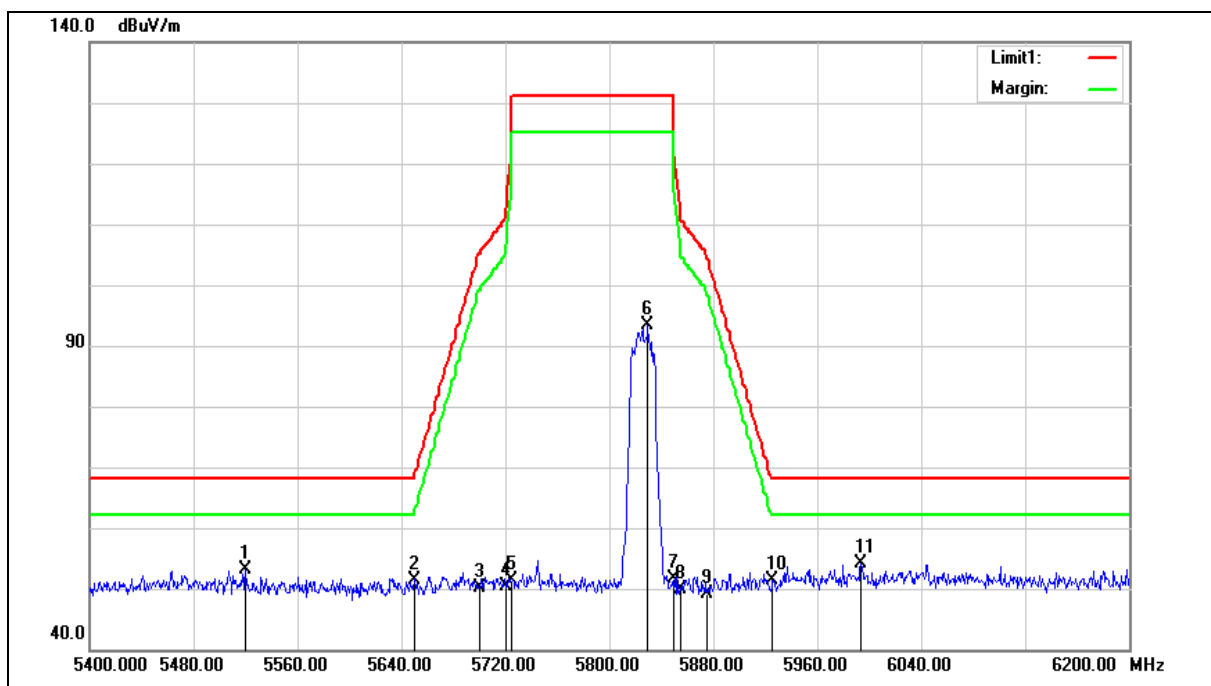

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5520.000	52.74	0.27	53.01	68.20	-15.19	peak
2	5650.000	50.81	0.62	51.43	68.20	-16.77	peak
3	5700.000	49.36	0.75	50.11	105.20	-55.09	peak
4	5720.000	49.68	0.81	50.49	110.80	-60.31	peak
5	5725.000	50.61	0.82	51.43	122.20	-70.77	peak
6	5829.600	92.37	1.11	93.48	--	--	peak
7	5850.000	50.37	1.17	51.54	122.20	-70.66	peak
8	5855.000	48.63	1.18	49.81	110.80	-60.99	peak
9	5875.000	48.02	1.23	49.25	105.20	-55.95	peak
10	5925.000	50.12	1.37	51.49	68.20	-16.71	peak
11	5993.600	52.68	1.56	54.24	68.20	-13.96	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

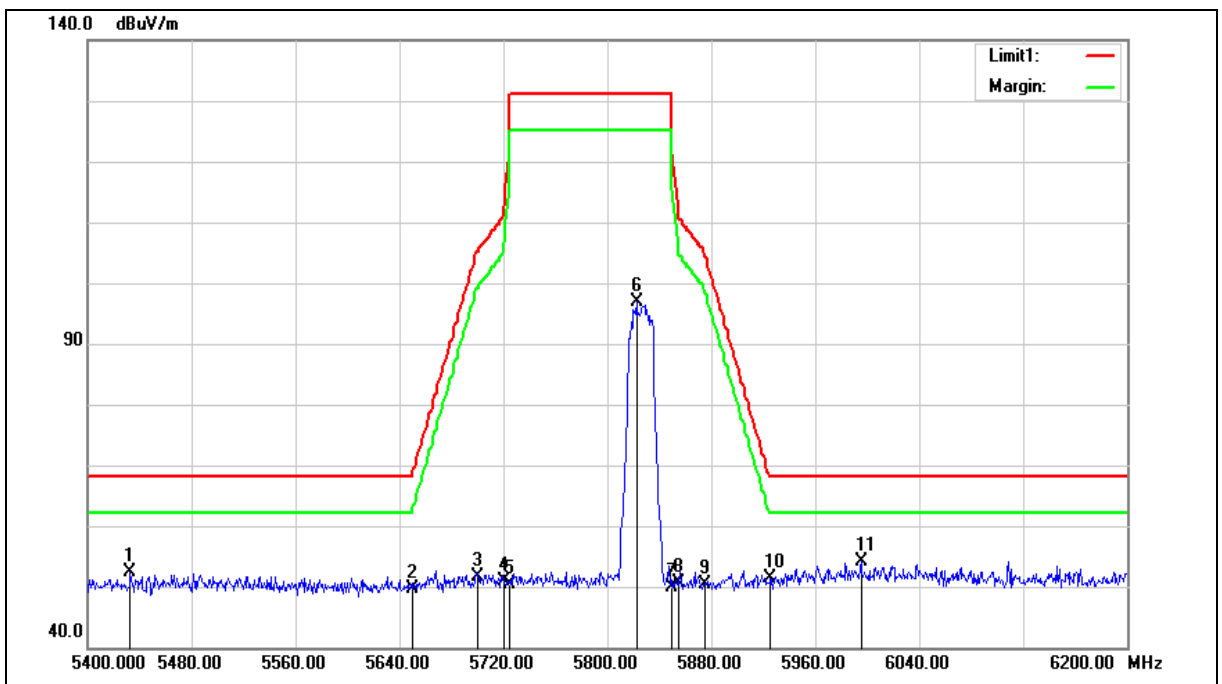

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5432.800	52.19	0.09	52.28	68.20	-15.92	peak
2	5650.000	48.91	0.62	49.53	68.20	-18.67	peak
3	5700.000	50.91	0.75	51.66	105.20	-53.54	peak
4	5720.000	50.08	0.81	50.89	110.80	-59.91	peak
5	5725.000	49.47	0.82	50.29	122.20	-71.91	peak
6	5822.400	95.80	1.10	96.90	--	--	peak
7	5850.000	48.69	1.17	49.86	122.20	-72.34	peak
8	5855.000	49.52	1.18	50.70	110.80	-60.10	peak
9	5875.000	49.25	1.23	50.48	105.20	-54.72	peak
10	5925.000	49.90	1.37	51.27	68.20	-16.93	peak
11	5995.200	52.45	1.56	54.01	68.20	-14.19	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

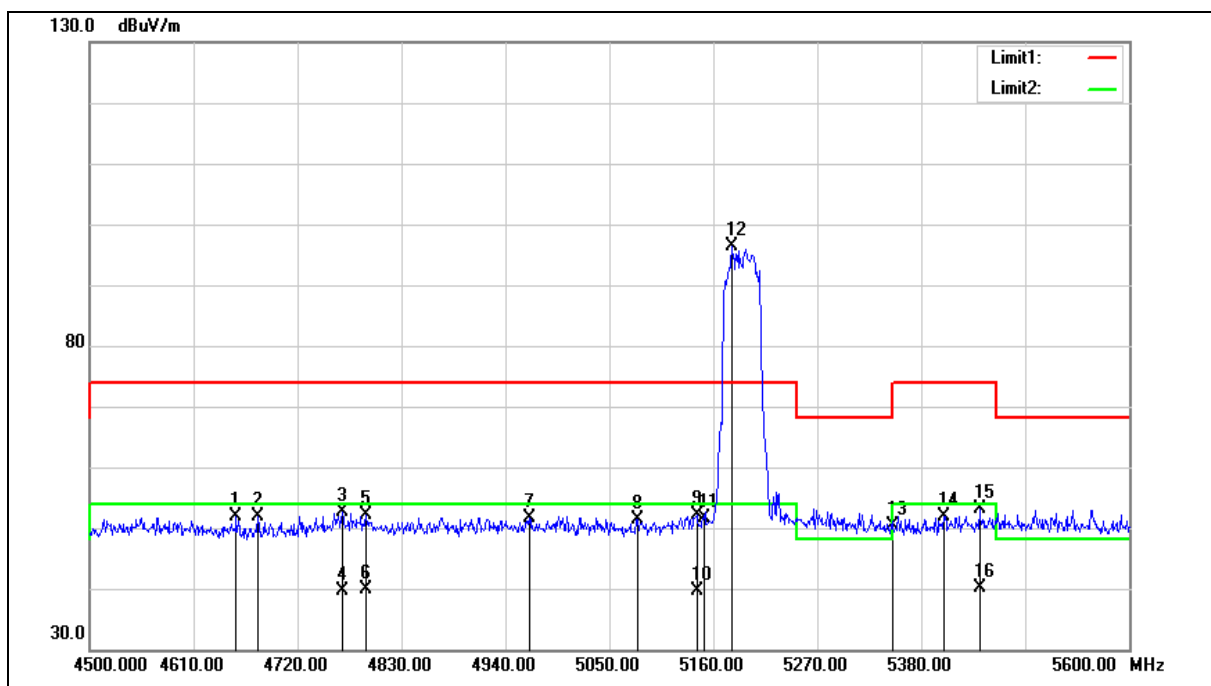

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4655.100	53.50	-1.72	51.78	74.00	-22.22	peak
2	4678.200	53.61	-1.65	51.96	74.00	-22.04	peak
3	4767.300	53.94	-1.41	52.53	74.00	-21.47	peak
4	4767.300	41.16	-1.41	39.75	54.00	-14.25	AVG
5	4792.600	53.48	-1.34	52.14	74.00	-21.86	peak
6	4792.600	41.11	-1.34	39.77	54.00	-14.23	AVG
7	4965.300	52.48	-0.87	51.61	74.00	-22.39	peak
8	5079.700	52.00	-0.62	51.38	74.00	-22.62	peak
9	5142.400	52.61	-0.49	52.12	74.00	-21.88	peak
10	5142.400	40.10	-0.49	39.61	54.00	-14.39	AVG
11	5150.000	52.21	-0.48	51.73	74.00	-22.27	peak
12	5179.800	96.76	-0.42	96.34	--	--	peak
13	5350.000	50.41	-0.08	50.33	74.00	-23.67	peak
14	5404.200	51.80	0.02	51.82	74.00	-22.18	peak
15	5441.600	52.93	0.09	53.02	74.00	-20.98	peak
16	5441.600	40.15	0.09	40.24	54.00	-13.76	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

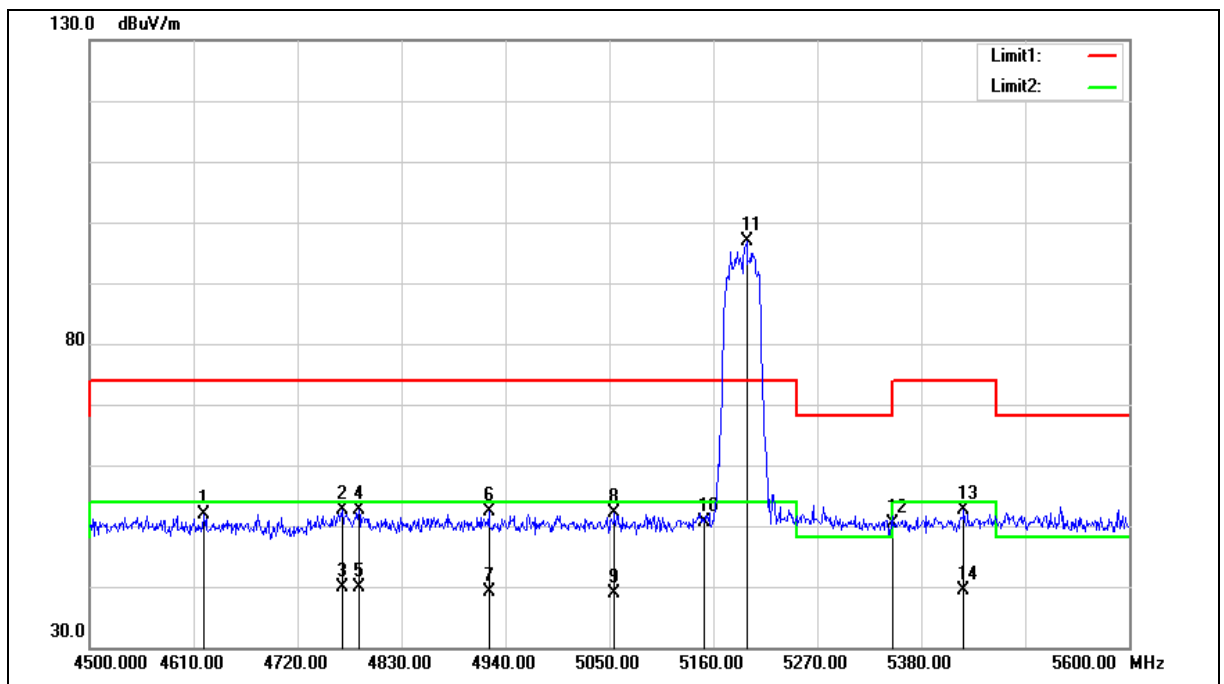

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4621.000	53.76	-1.81	51.95	74.00	-22.05	peak
2	4767.300	53.96	-1.41	52.55	74.00	-21.45	peak
3	4767.300	41.22	-1.41	39.81	54.00	-14.19	AVG
4	4784.900	53.95	-1.36	52.59	74.00	-21.41	peak
5	4784.900	41.23	-1.36	39.87	54.00	-14.13	AVG
6	4922.400	53.26	-0.99	52.27	74.00	-21.73	peak
7	4922.400	40.03	-0.99	39.04	54.00	-14.96	AVG
8	5055.500	52.90	-0.66	52.24	74.00	-21.76	peak
9	5055.500	39.51	-0.66	38.85	54.00	-15.15	AVG
10	5150.000	51.22	-0.48	50.74	74.00	-23.26	peak
11	5195.200	97.15	-0.39	96.76	--	--	peak
12	5350.000	50.39	-0.08	50.31	74.00	-23.69	peak
13	5425.100	52.45	0.06	52.51	74.00	-21.49	peak
14	5425.100	39.25	0.06	39.31	54.00	-14.69	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

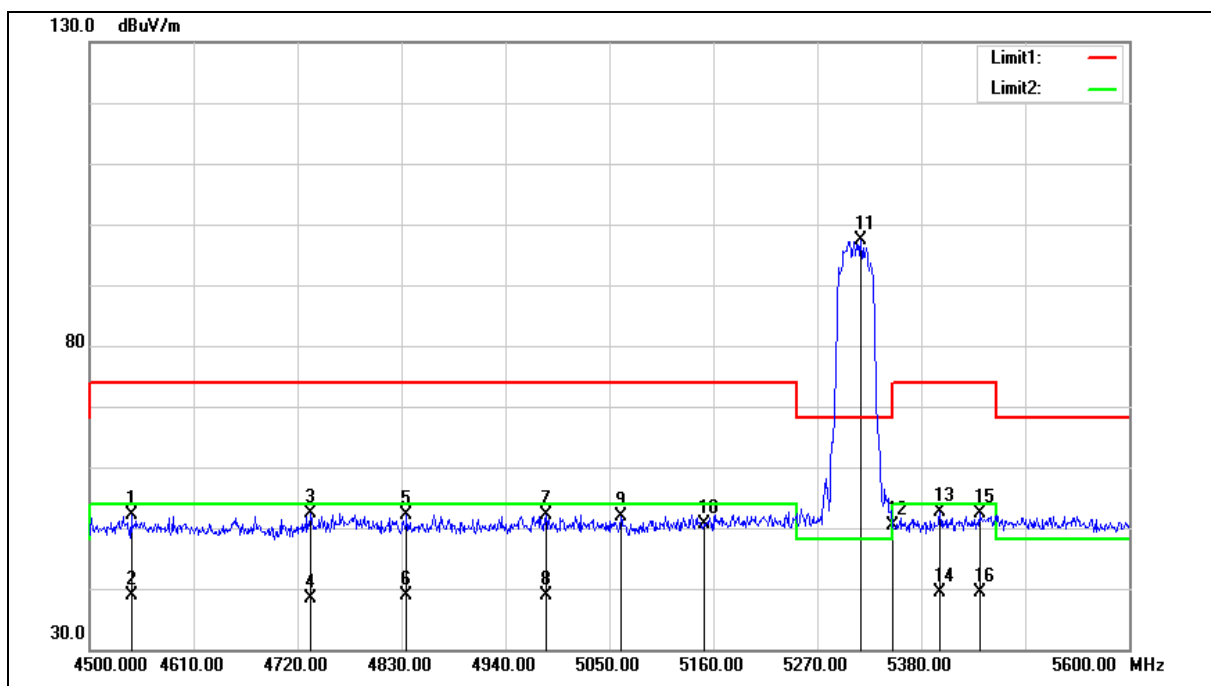

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4544.000	54.26	-2.02	52.24	74.00	-21.76	peak
2	4544.000	40.86	-2.02	38.84	54.00	-15.16	AVG
3	4734.300	53.98	-1.50	52.48	74.00	-21.52	peak
4	4734.300	39.87	-1.50	38.37	54.00	-15.63	AVG
5	4835.500	53.40	-1.23	52.17	74.00	-21.83	peak
6	4835.500	40.05	-1.23	38.82	54.00	-15.18	AVG
7	4982.900	52.91	-0.82	52.09	74.00	-21.91	peak
8	4982.900	39.78	-0.82	38.96	54.00	-15.04	AVG
9	5062.100	52.52	-0.65	51.87	74.00	-22.13	peak
10	5150.000	50.99	-0.48	50.51	74.00	-23.49	peak
11	5316.200	97.43	-0.15	97.28	--	--	peak
12	5350.000	50.51	-0.08	50.43	74.00	-23.57	peak
13	5399.800	52.62	0.02	52.64	74.00	-21.36	peak
14	5399.800	39.37	0.02	39.39	54.00	-14.61	AVG
15	5441.600	52.39	0.09	52.48	74.00	-21.52	peak
16	5441.600	39.21	0.09	39.30	54.00	-14.70	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

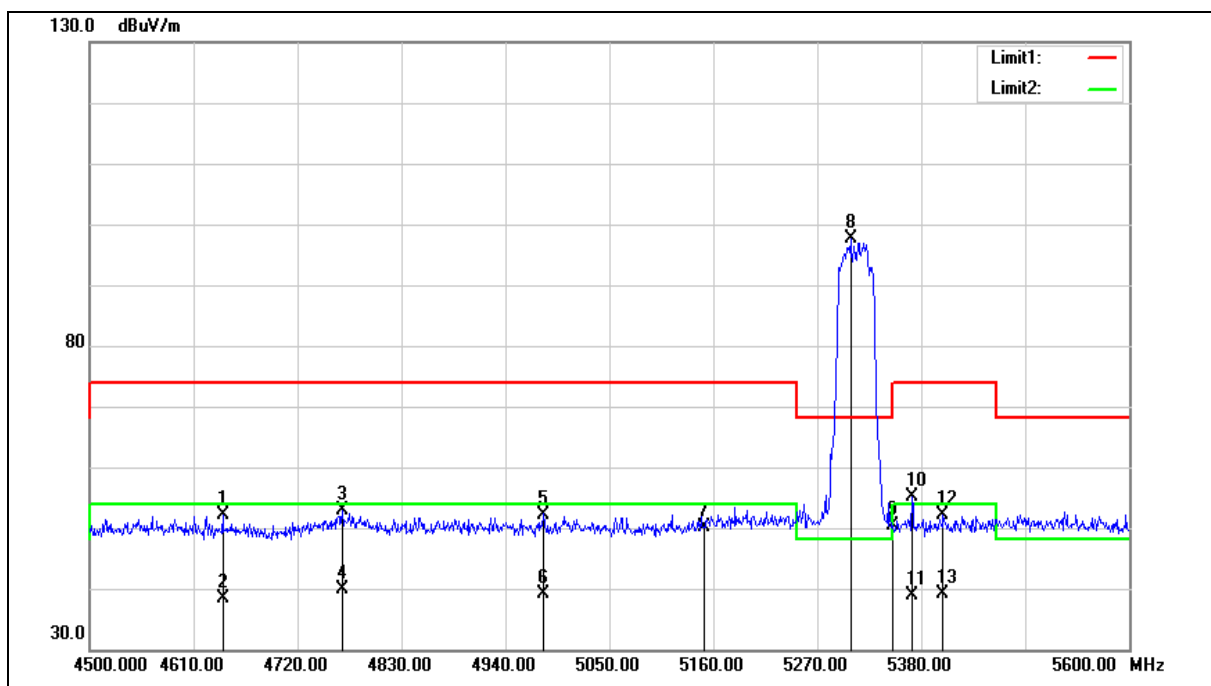

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4640.800	53.80	-1.76	52.04	74.00	-21.96	peak
2	4640.800	40.09	-1.76	38.33	54.00	-15.67	AVG
3	4767.300	54.33	-1.41	52.92	74.00	-21.08	peak
4	4767.300	41.17	-1.41	39.76	54.00	-14.24	AVG
5	4980.700	53.07	-0.82	52.25	74.00	-21.75	peak
6	4980.700	40.06	-0.82	39.24	54.00	-14.76	AVG
7	5150.000	50.51	-0.48	50.03	74.00	-23.97	peak
8	5305.200	97.68	-0.17	97.51	--	--	peak
9	5350.000	50.35	-0.08	50.27	74.00	-23.73	peak
10	5370.100	55.11	-0.03	55.08	74.00	-18.92	peak
11	5370.100	38.79	-0.03	38.76	54.00	-15.24	AVG
12	5403.100	52.05	0.02	52.07	74.00	-21.93	peak
13	5403.100	39.07	0.02	39.09	54.00	-14.91	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

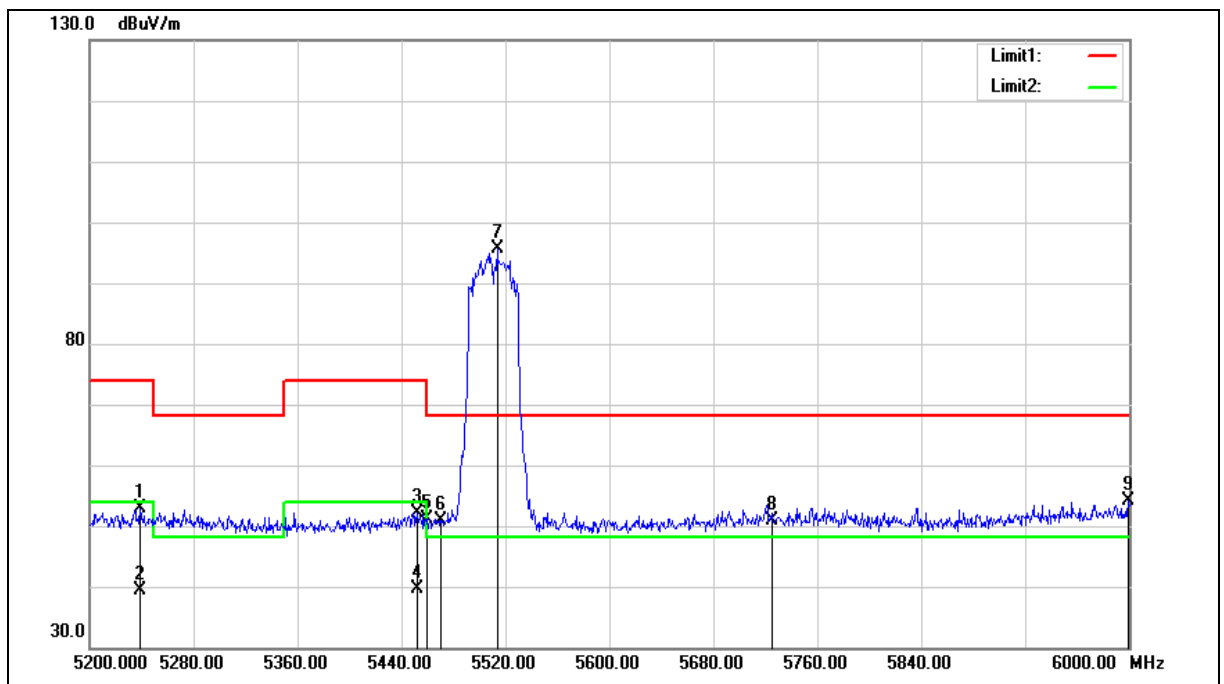

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5239.200	53.19	-0.30	52.89	74.00	-21.11	peak
2	5239.200	39.64	-0.30	39.34	54.00	-14.66	AVG
3	5452.000	52.00	0.12	52.12	74.00	-21.88	peak
4	5452.000	39.56	0.12	39.68	54.00	-14.32	AVG
5	5460.000	50.95	0.14	51.09	74.00	-22.91	peak
6	5470.000	50.83	0.16	50.99	68.20	-17.21	peak
7	5513.600	95.31	0.25	95.56	--	--	peak
8	5725.000	49.94	0.82	50.76	68.20	-17.44	peak
9	5999.200	52.65	1.57	54.22	68.20	-13.98	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

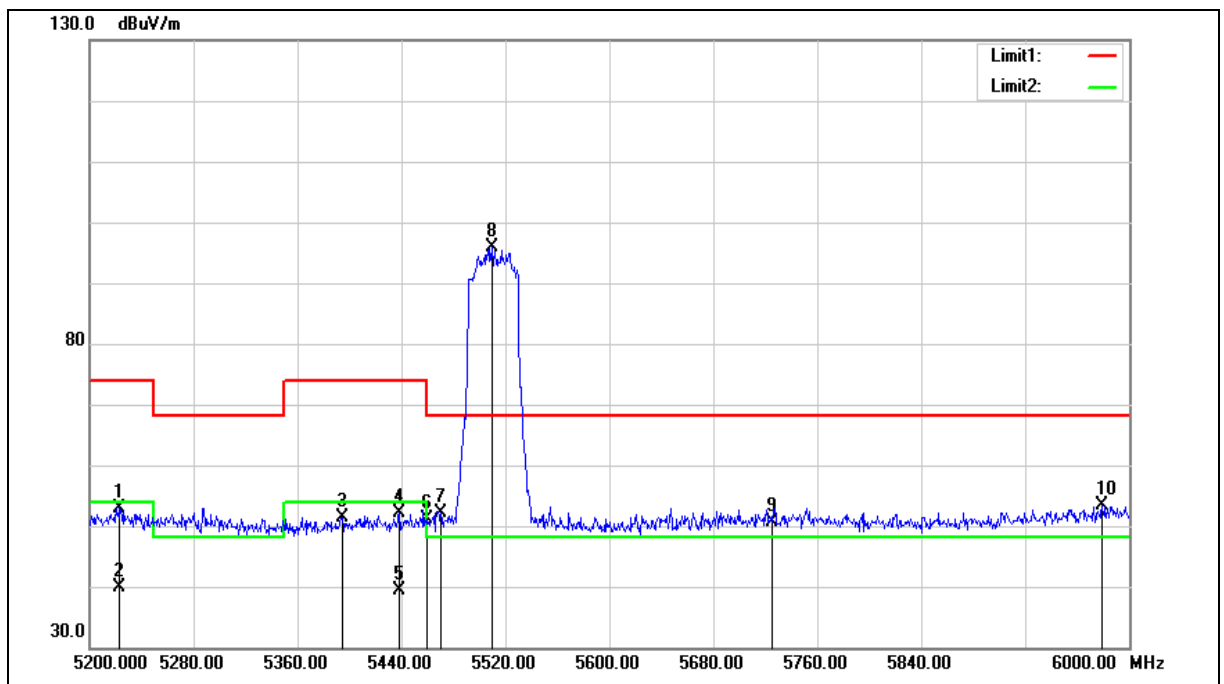

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5223.200	53.33	-0.33	53.00	74.00	-21.00	peak
2	5223.200	40.15	-0.33	39.82	54.00	-14.18	AVG
3	5394.400	51.33	0.01	51.34	74.00	-22.66	peak
4	5438.400	52.06	0.09	52.15	74.00	-21.85	peak
5	5438.400	39.28	0.09	39.37	54.00	-14.63	AVG
6	5460.000	50.96	0.14	51.10	74.00	-22.90	peak
7	5470.000	52.03	0.16	52.19	68.20	-16.01	peak
8	5509.600	95.74	0.24	95.98	--	--	peak
9	5725.000	49.76	0.82	50.58	68.20	-17.62	peak
10	5979.200	51.78	1.52	53.30	68.20	-14.90	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

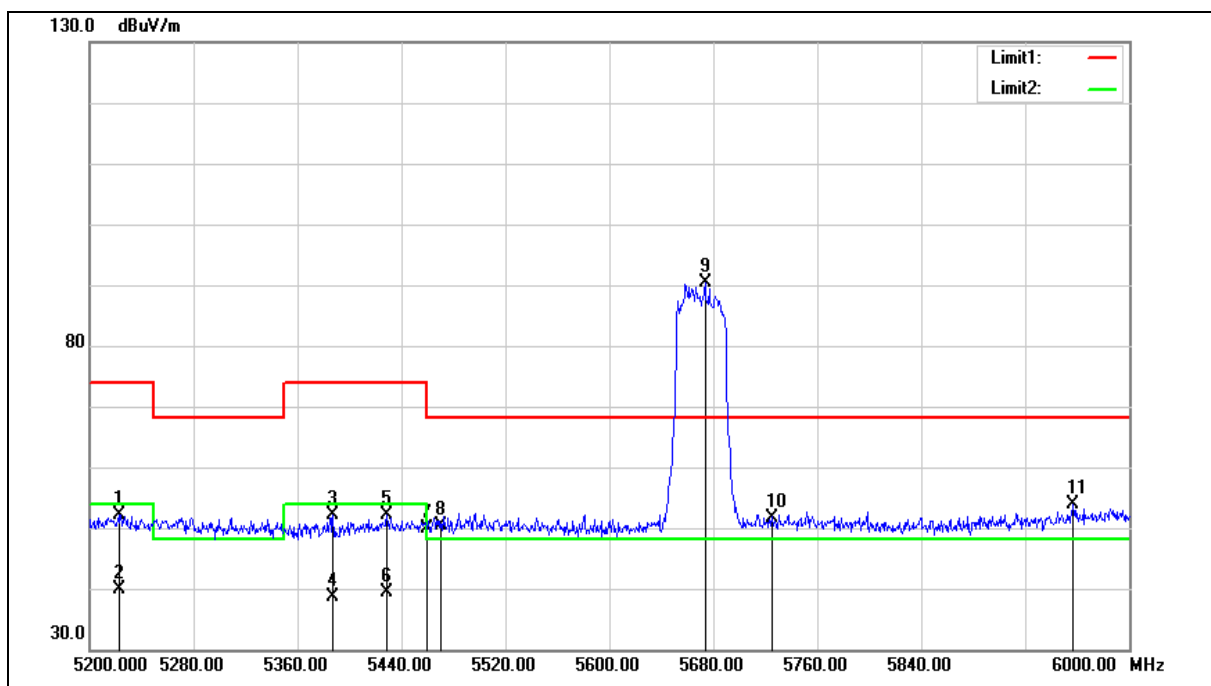

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5223.200	52.54	-0.33	52.21	74.00	-21.79	peak
2	5223.200	40.10	-0.33	39.77	54.00	-14.23	AVG
3	5387.200	52.05	0.00	52.05	74.00	-21.95	peak
4	5387.200	38.64	0.00	38.64	54.00	-15.36	AVG
5	5428.800	52.10	0.08	52.18	74.00	-21.82	peak
6	5428.800	39.30	0.08	39.38	54.00	-14.62	AVG
7	5460.000	49.75	0.14	49.89	74.00	-24.11	peak
8	5470.000	50.10	0.16	50.26	68.20	-17.94	peak
9	5673.600	89.74	0.68	90.42	--	--	peak
10	5725.000	50.86	0.82	51.68	68.20	-16.52	peak
11	5956.800	52.54	1.45	53.99	68.20	-14.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

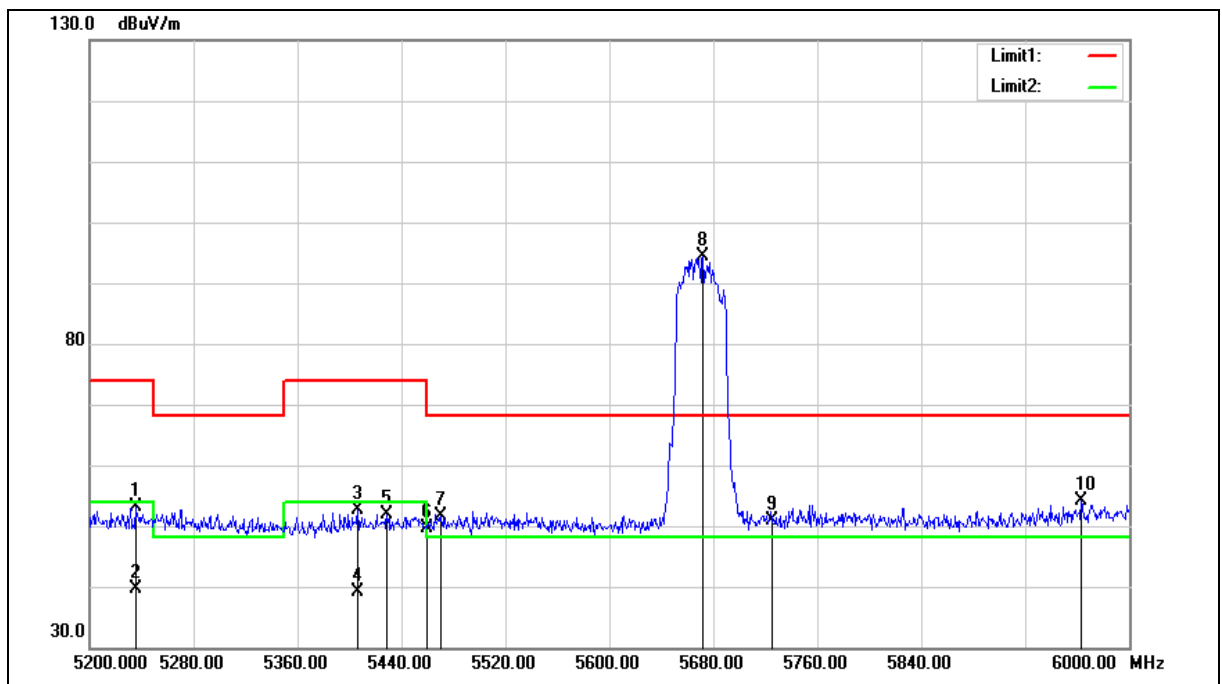

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5235.200	53.33	-0.31	53.02	74.00	-20.98	peak
2	5235.200	40.05	-0.31	39.74	54.00	-14.26	AVG
3	5406.400	52.47	0.04	52.51	74.00	-21.49	peak
4	5406.400	39.15	0.04	39.19	54.00	-14.81	AVG
5	5428.800	51.76	0.08	51.84	74.00	-22.16	peak
6	5460.000	49.59	0.14	49.73	74.00	-24.27	peak
7	5470.000	51.57	0.16	51.73	68.20	-16.47	peak
8	5672.000	93.68	0.68	94.36	--	--	peak
9	5725.000	50.16	0.82	50.98	68.20	-17.22	peak
10	5963.200	52.56	1.46	54.02	68.20	-14.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

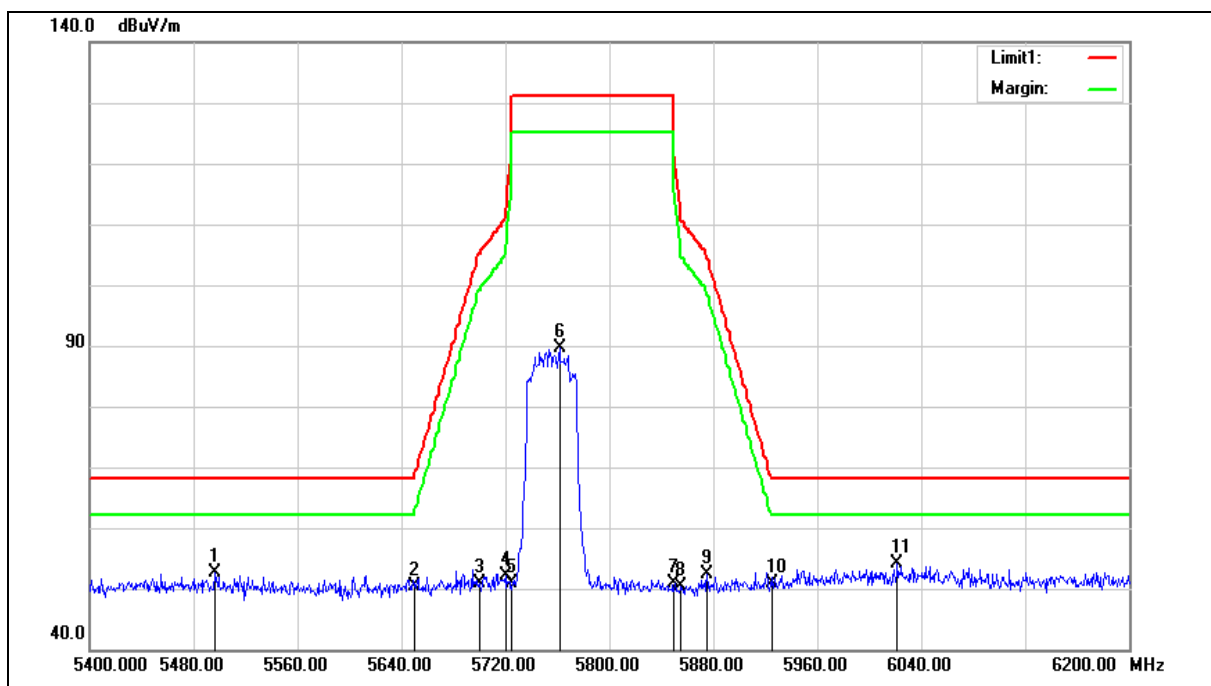

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5496.000	52.46	0.21	52.67	68.20	-15.53	peak
2	5650.000	49.74	0.62	50.36	68.20	-17.84	peak
3	5700.000	50.18	0.75	50.93	105.20	-54.27	peak
4	5720.000	51.21	0.81	52.02	110.80	-58.78	peak
5	5725.000	49.95	0.82	50.77	122.20	-71.43	peak
6	5761.600	88.67	0.93	89.60	--	--	peak
7	5850.000	49.66	1.17	50.83	122.20	-71.37	peak
8	5855.000	49.18	1.18	50.36	110.80	-60.44	peak
9	5875.000	51.18	1.23	52.41	105.20	-52.79	peak
10	5925.000	49.48	1.37	50.85	68.20	-17.35	peak
11	6021.600	52.38	1.64	54.02	68.20	-14.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

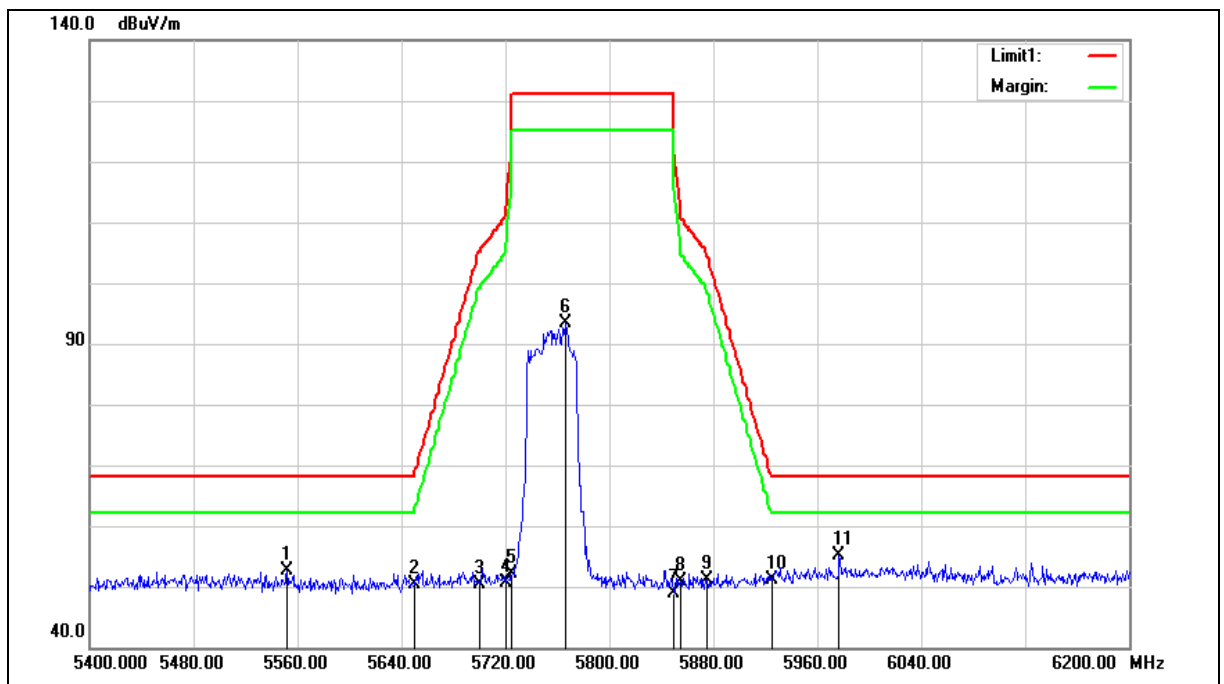

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5552.000	52.30	0.35	52.65	68.20	-15.55	peak
2	5650.000	49.65	0.62	50.27	68.20	-17.93	peak
3	5700.000	49.59	0.75	50.34	105.20	-54.86	peak
4	5720.000	49.85	0.81	50.66	110.80	-60.14	peak
5	5725.000	51.40	0.82	52.22	122.20	-69.98	peak
6	5766.400	92.38	0.94	93.32	--	--	peak
7	5850.000	47.82	1.17	48.99	122.20	-73.21	peak
8	5855.000	49.72	1.18	50.90	110.80	-59.90	peak
9	5875.000	49.80	1.23	51.03	105.20	-54.17	peak
10	5925.000	49.78	1.37	51.15	68.20	-17.05	peak
11	5976.800	53.64	1.50	55.14	68.20	-13.06	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		

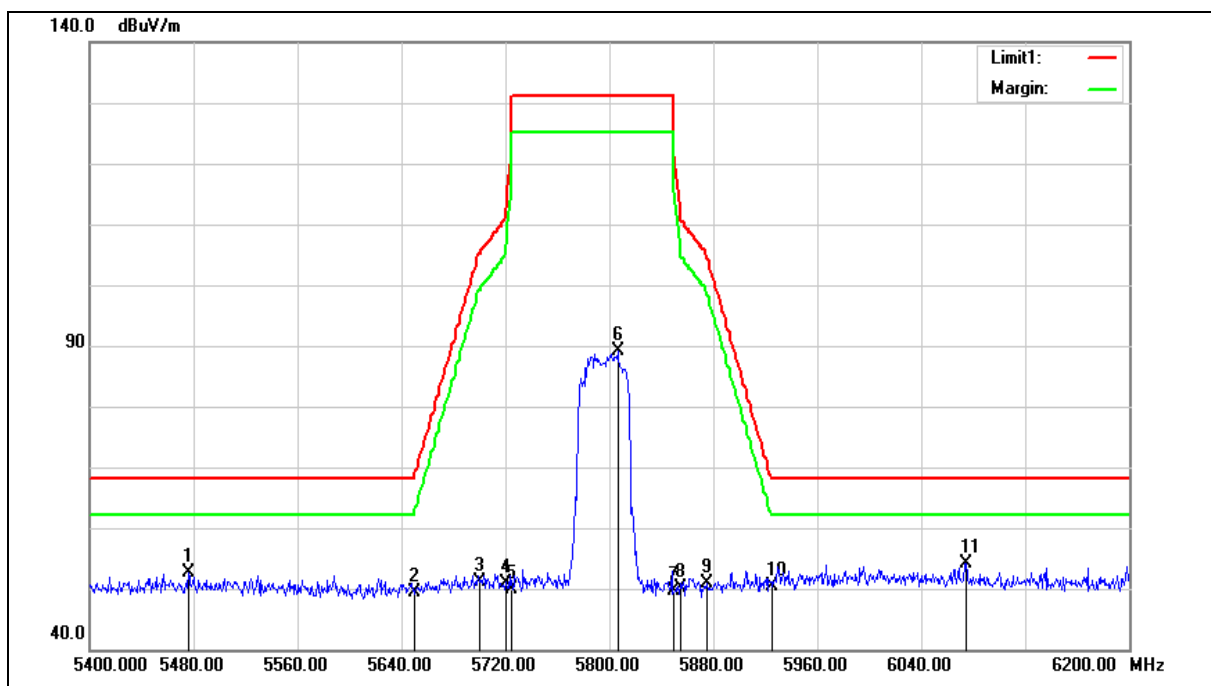

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795MHz		
Mode:	Mode 16		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5476.000	52.51	0.17	52.68	68.20	-15.52	peak
2	5650.000	48.75	0.62	49.37	68.20	-18.83	peak
3	5700.000	50.27	0.75	51.02	105.20	-54.18	peak
4	5720.000	50.07	0.81	50.88	110.80	-59.92	peak
5	5725.000	48.97	0.82	49.79	122.20	-72.41	peak
6	5806.400	88.20	1.05	89.25	--	--	peak
7	5850.000	48.42	1.17	49.59	122.20	-72.61	peak
8	5855.000	48.89	1.18	50.07	110.80	-60.73	peak
9	5875.000	49.75	1.23	50.98	105.20	-54.22	peak
10	5925.000	49.02	1.37	50.39	68.20	-17.81	peak
11	6074.400	52.33	1.83	54.16	68.20	-14.04	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		

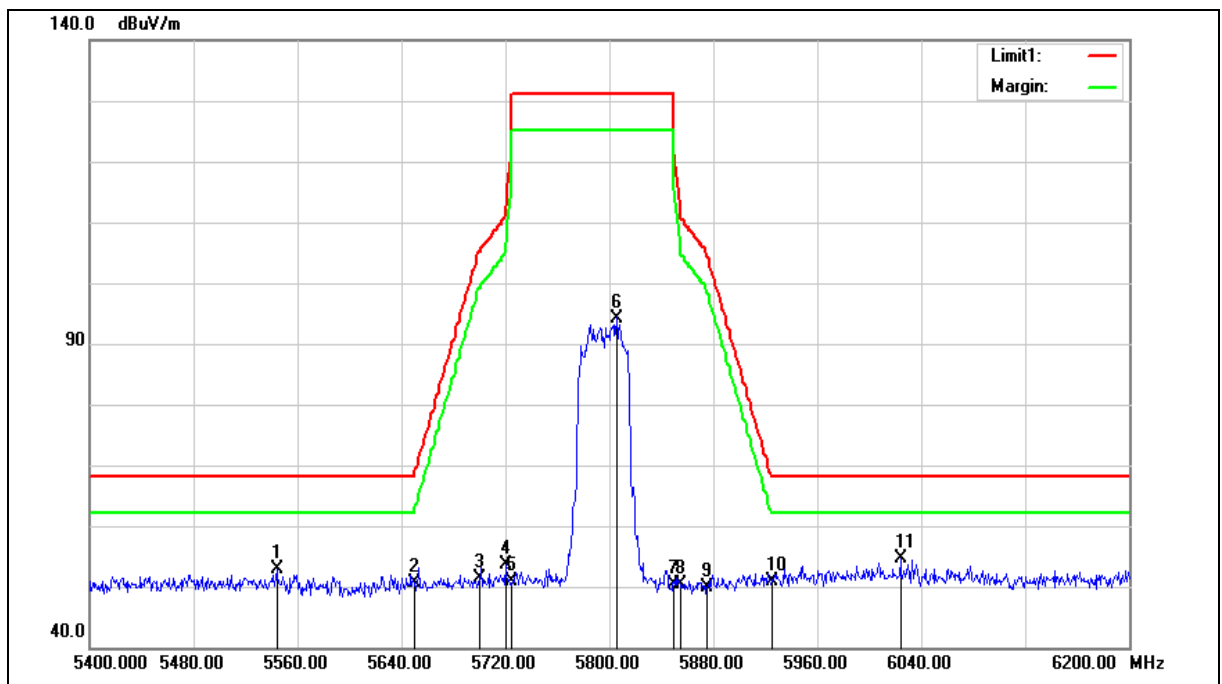

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795MHz		
Mode:	Mode 16		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5544.000	52.52	0.34	52.86	68.20	-15.34	peak
2	5650.000	50.02	0.62	50.64	68.20	-17.56	peak
3	5700.000	50.73	0.75	51.48	105.20	-53.72	peak
4	5720.000	52.77	0.81	53.58	110.80	-57.22	peak
5	5725.000	49.98	0.82	50.80	122.20	-71.40	peak
6	5805.600	93.20	1.05	94.25	--	--	peak
7	5850.000	49.17	1.17	50.34	122.20	-71.86	peak
8	5855.000	49.13	1.18	50.31	110.80	-60.49	peak
9	5875.000	48.76	1.23	49.99	105.20	-55.21	peak
10	5925.000	49.55	1.37	50.92	68.20	-17.28	peak
11	6024.000	53.03	1.65	54.68	68.20	-13.52	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

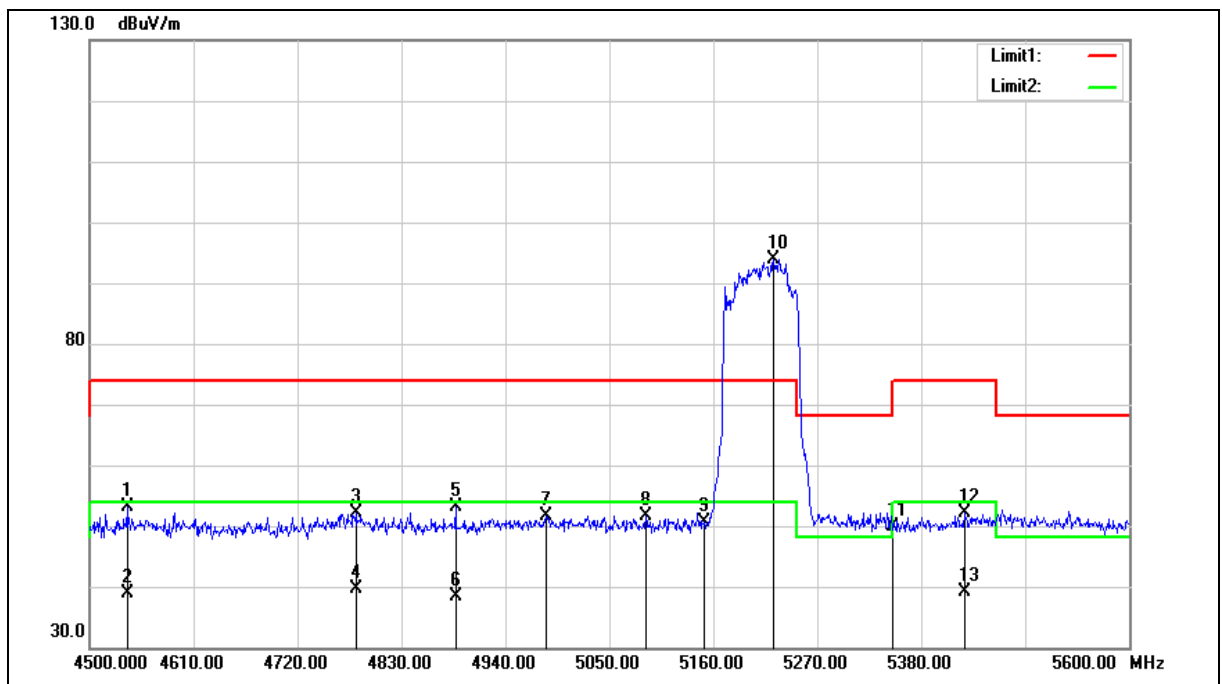

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4539.600	55.19	-2.04	53.15	74.00	-20.85	peak
2	4539.600	40.84	-2.04	38.80	54.00	-15.20	AVG
3	4781.600	53.40	-1.36	52.04	74.00	-21.96	peak
4	4781.600	40.95	-1.36	39.59	54.00	-14.41	AVG
5	4887.200	54.17	-1.07	53.10	74.00	-20.90	peak
6	4887.200	39.54	-1.07	38.47	54.00	-15.53	AVG
7	4982.900	52.54	-0.82	51.72	74.00	-22.28	peak
8	5088.500	52.21	-0.60	51.61	74.00	-22.39	peak
9	5150.000	51.05	-0.48	50.57	74.00	-23.43	peak
10	5223.800	94.26	-0.33	93.93	--	--	peak
11	5350.000	50.00	-0.08	49.92	74.00	-24.08	peak
12	5426.200	52.13	0.06	52.19	74.00	-21.81	peak
13	5426.200	39.04	0.06	39.10	54.00	-14.90	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

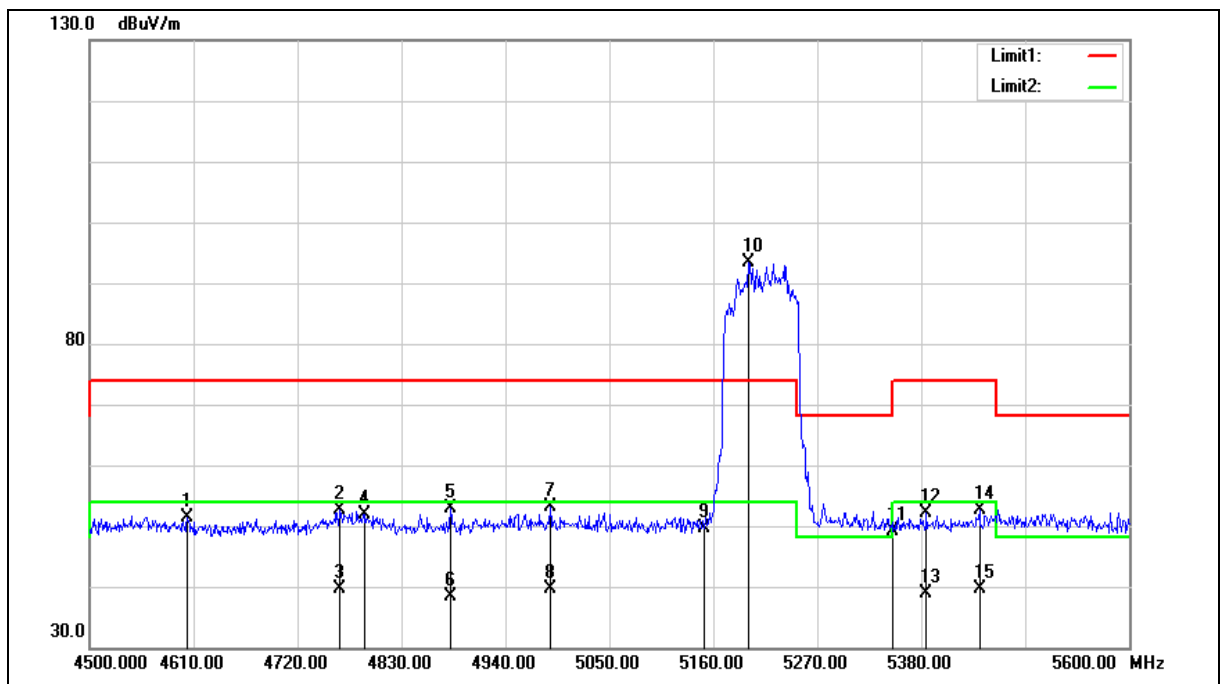

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5210MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4603.400	53.32	-1.86	51.46	74.00	-22.54	peak
2	4765.100	54.03	-1.41	52.62	74.00	-21.38	peak
3	4765.100	40.99	-1.41	39.58	54.00	-14.42	AVG
4	4791.500	53.32	-1.35	51.97	74.00	-22.03	peak
5	4881.700	53.97	-1.10	52.87	74.00	-21.13	peak
6	4881.700	39.52	-1.10	38.42	54.00	-15.58	AVG
7	4987.300	53.83	-0.81	53.02	74.00	-20.98	peak
8	4987.300	40.32	-0.81	39.51	54.00	-14.49	AVG
9	5150.000	50.14	-0.48	49.66	74.00	-24.34	peak
10	5197.400	93.64	-0.38	93.26	--	--	peak
11	5350.000	49.15	-0.08	49.07	74.00	-24.93	peak
12	5385.500	52.11	0.00	52.11	74.00	-21.89	peak
13	5385.500	38.93	0.00	38.93	54.00	-15.07	AVG
14	5441.600	52.50	0.09	52.59	74.00	-21.41	peak
15	5441.600	39.56	0.09	39.65	54.00	-14.35	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

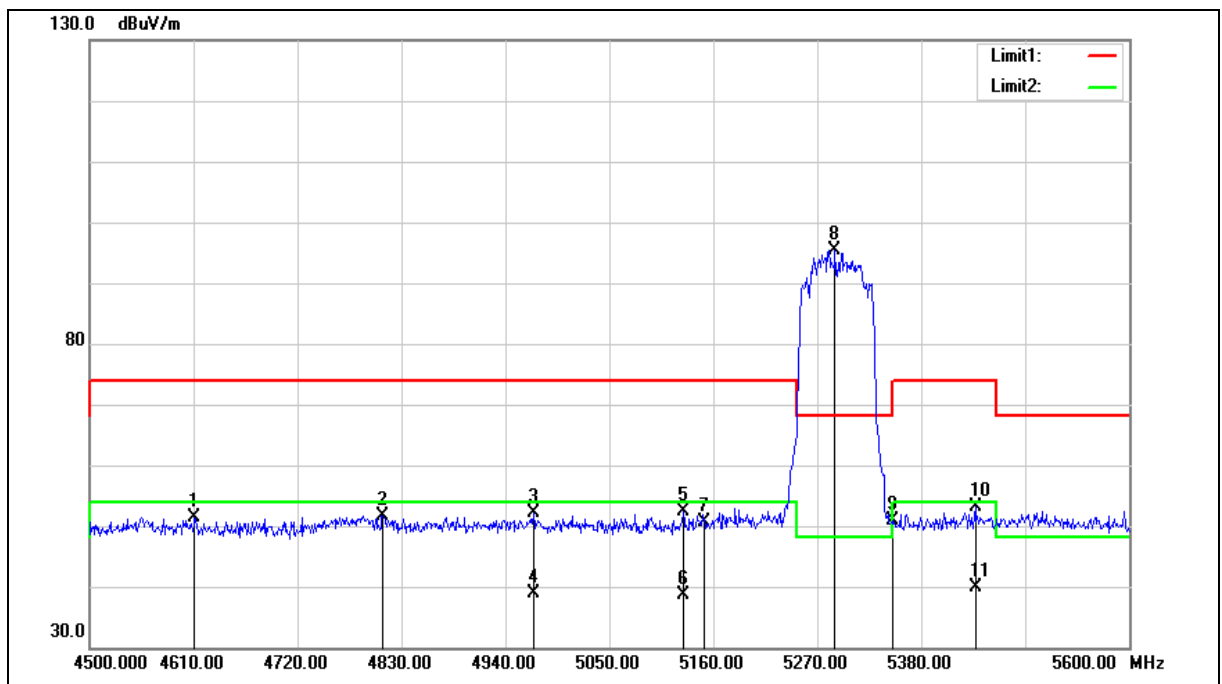

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4611.100	53.11	-1.84	51.27	74.00	-22.73	peak
2	4810.200	52.99	-1.29	51.70	74.00	-22.30	peak
3	4969.700	52.95	-0.84	52.11	74.00	-21.89	peak
4	4969.700	39.81	-0.84	38.97	54.00	-15.03	AVG
5	5128.100	52.82	-0.52	52.30	74.00	-21.70	peak
6	5128.100	39.20	-0.52	38.68	54.00	-15.32	AVG
7	5150.000	51.21	-0.48	50.73	74.00	-23.27	peak
8	5288.700	95.51	-0.20	95.31	--	--	peak
9	5350.000	50.85	-0.08	50.77	74.00	-23.23	peak
10	5437.200	53.03	0.09	53.12	74.00	-20.88	peak
11	5437.200	39.70	0.09	39.79	54.00	-14.21	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

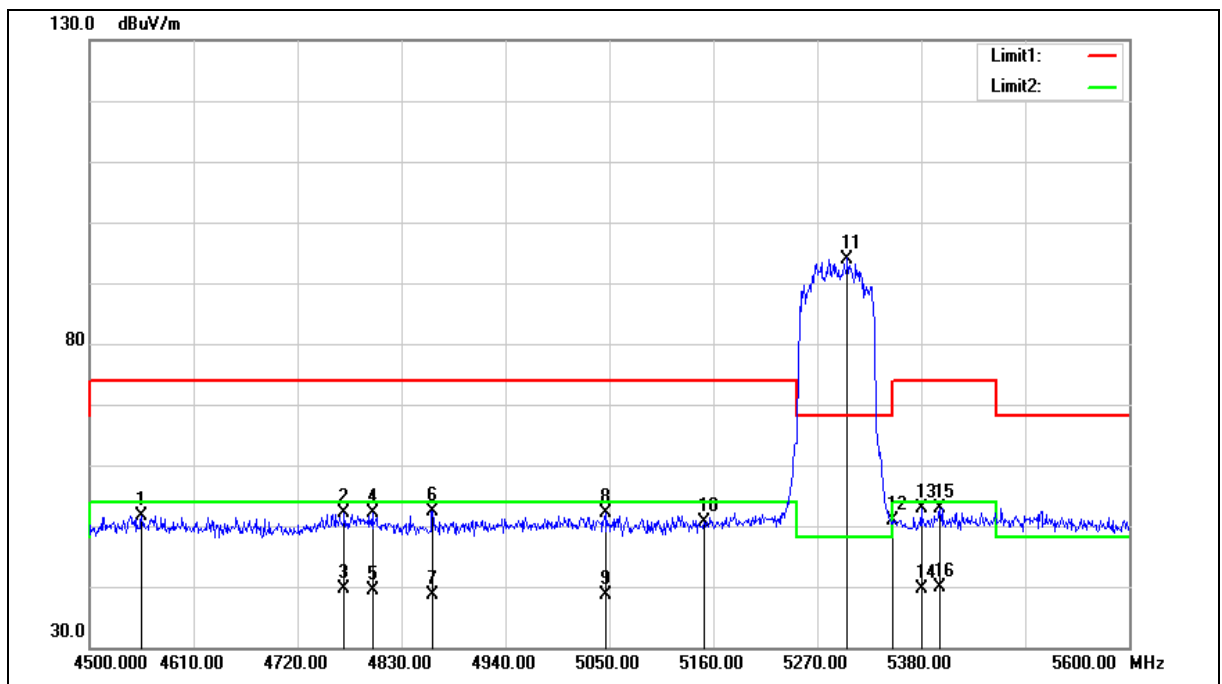

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5290MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4555.000	53.59	-1.99	51.60	74.00	-22.40	peak
2	4769.500	53.56	-1.40	52.16	74.00	-21.84	peak
3	4769.500	40.98	-1.40	39.58	54.00	-14.42	AVG
4	4799.200	53.51	-1.32	52.19	74.00	-21.81	peak
5	4799.200	40.62	-1.32	39.30	54.00	-14.70	AVG
6	4863.000	53.49	-1.15	52.34	74.00	-21.66	peak
7	4863.000	39.71	-1.15	38.56	54.00	-15.44	AVG
8	5045.600	52.81	-0.68	52.13	74.00	-21.87	peak
9	5045.600	39.38	-0.68	38.70	54.00	-15.30	AVG
10	5150.000	51.07	-0.48	50.59	74.00	-23.41	peak
11	5301.900	94.18	-0.18	94.00	--	--	peak
12	5350.000	51.00	-0.08	50.92	74.00	-23.08	peak
13	5380.000	52.92	-0.03	52.89	74.00	-21.11	peak
14	5380.000	39.78	-0.03	39.75	54.00	-14.25	AVG
15	5399.800	52.78	0.02	52.80	74.00	-21.20	peak
16	5399.800	39.84	0.02	39.86	54.00	-14.14	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

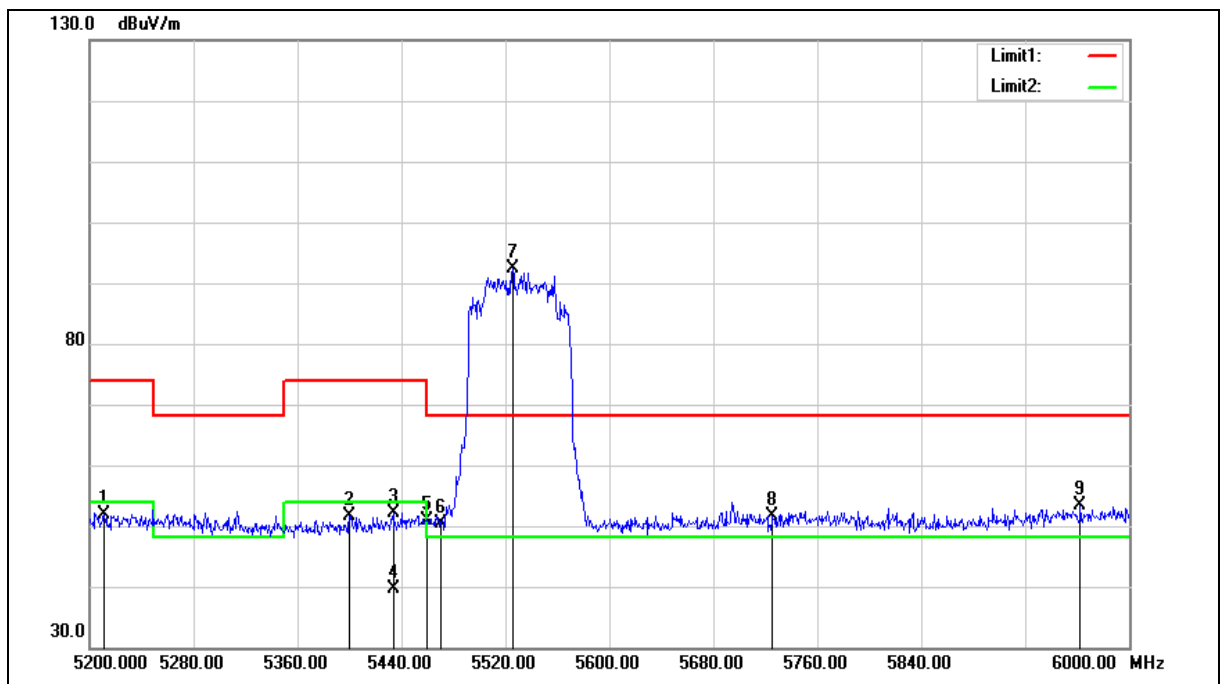

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5211.200	52.21	-0.35	51.86	74.00	-22.14	peak
2	5400.000	51.68	0.02	51.70	74.00	-22.30	peak
3	5433.600	51.96	0.09	52.05	74.00	-21.95	peak
4	5433.600	39.52	0.09	39.61	54.00	-14.39	AVG
5	5460.000	50.86	0.14	51.00	74.00	-23.00	peak
6	5470.000	50.17	0.16	50.33	68.20	-17.87	peak
7	5525.600	92.00	0.28	92.28	--	--	peak
8	5725.000	50.69	0.82	51.51	68.20	-16.69	peak
9	5962.400	51.88	1.46	53.34	68.20	-14.86	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

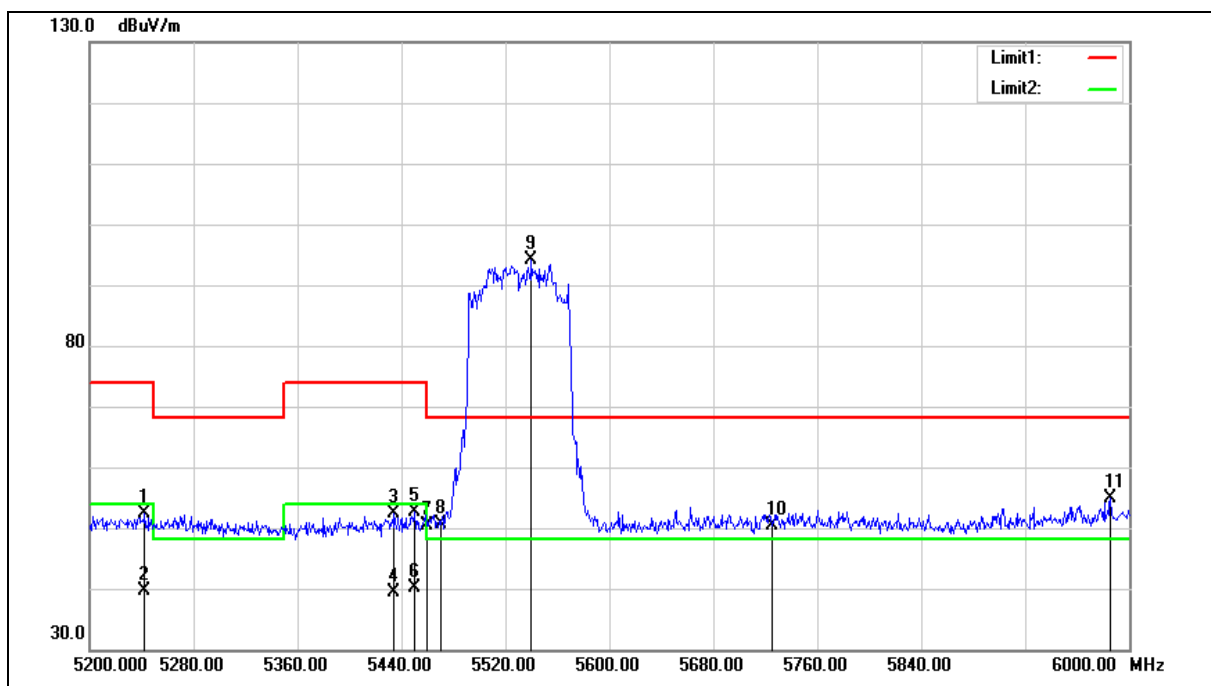

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5530MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5242.400	52.73	-0.29	52.44	74.00	-21.56	peak
2	5242.400	39.97	-0.29	39.68	54.00	-14.32	AVG
3	5434.400	52.31	0.09	52.40	74.00	-21.60	peak
4	5434.400	39.22	0.09	39.31	54.00	-14.69	AVG
5	5450.400	52.45	0.12	52.57	74.00	-21.43	peak
6	5450.400	40.04	0.12	40.16	54.00	-13.84	AVG
7	5460.000	50.33	0.14	50.47	74.00	-23.53	peak
8	5470.000	50.57	0.16	50.73	68.20	-17.47	peak
9	5540.000	93.70	0.32	94.02	--	--	peak
10	5725.000	49.62	0.82	50.44	68.20	-17.76	peak
11	5985.600	53.24	1.53	54.77	68.20	-13.43	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		

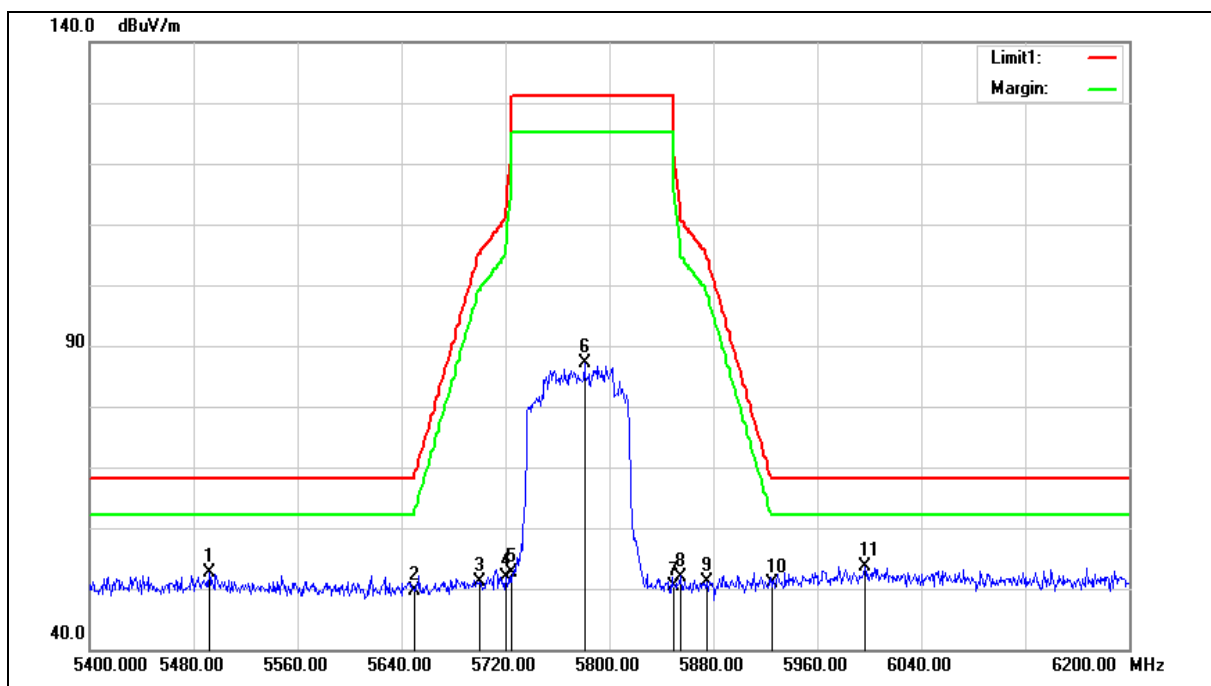

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775MHz		
Mode:	Mode 17		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5492.000	52.37	0.20	52.57	68.20	-15.63	peak
2	5650.000	48.93	0.62	49.55	68.20	-18.65	peak
3	5700.000	50.48	0.75	51.23	105.20	-53.97	peak
4	5720.000	50.97	0.81	51.78	110.80	-59.02	peak
5	5725.000	51.87	0.82	52.69	122.20	-69.51	peak
6	5780.800	86.07	0.98	87.05	--	--	peak
7	5850.000	49.13	1.17	50.30	122.20	-71.90	peak
8	5855.000	50.65	1.18	51.83	110.80	-58.97	peak
9	5875.000	49.92	1.23	51.15	105.20	-54.05	peak
10	5925.000	49.60	1.37	50.97	68.20	-17.23	peak
11	5996.800	52.16	1.56	53.72	68.20	-14.48	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		

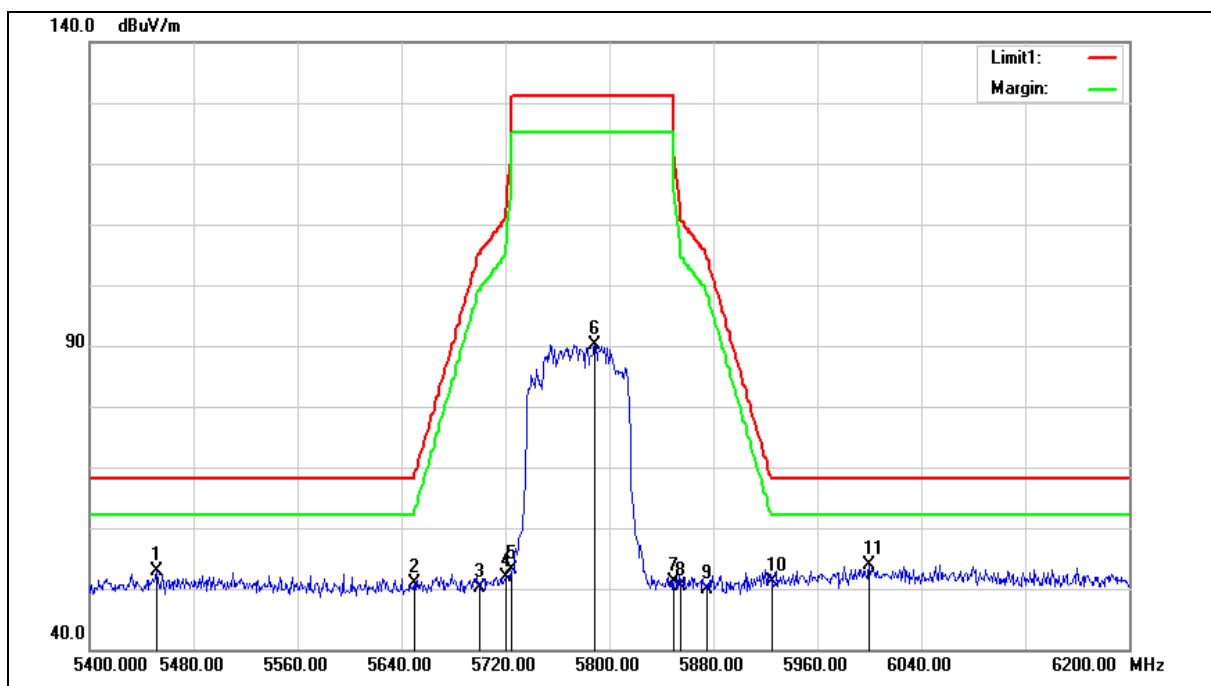

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5775MHz		
Mode:	Mode 17		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5451.200	52.82	0.12	52.94	68.20	-15.26	peak
2	5650.000	50.35	0.62	50.97	68.20	-17.23	peak
3	5700.000	49.45	0.75	50.20	105.20	-55.00	peak
4	5720.000	51.15	0.81	51.96	110.80	-58.84	peak
5	5725.000	52.43	0.82	53.25	122.20	-68.95	peak
6	5788.800	89.15	0.99	90.14	--	--	peak
7	5850.000	49.87	1.17	51.04	122.20	-71.16	peak
8	5855.000	49.13	1.18	50.31	110.80	-60.49	peak
9	5875.000	48.68	1.23	49.91	105.20	-55.29	peak
10	5925.000	49.68	1.37	51.05	68.20	-17.15	peak
11	6000.000	52.40	1.57	53.97	68.20	-14.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5250MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		

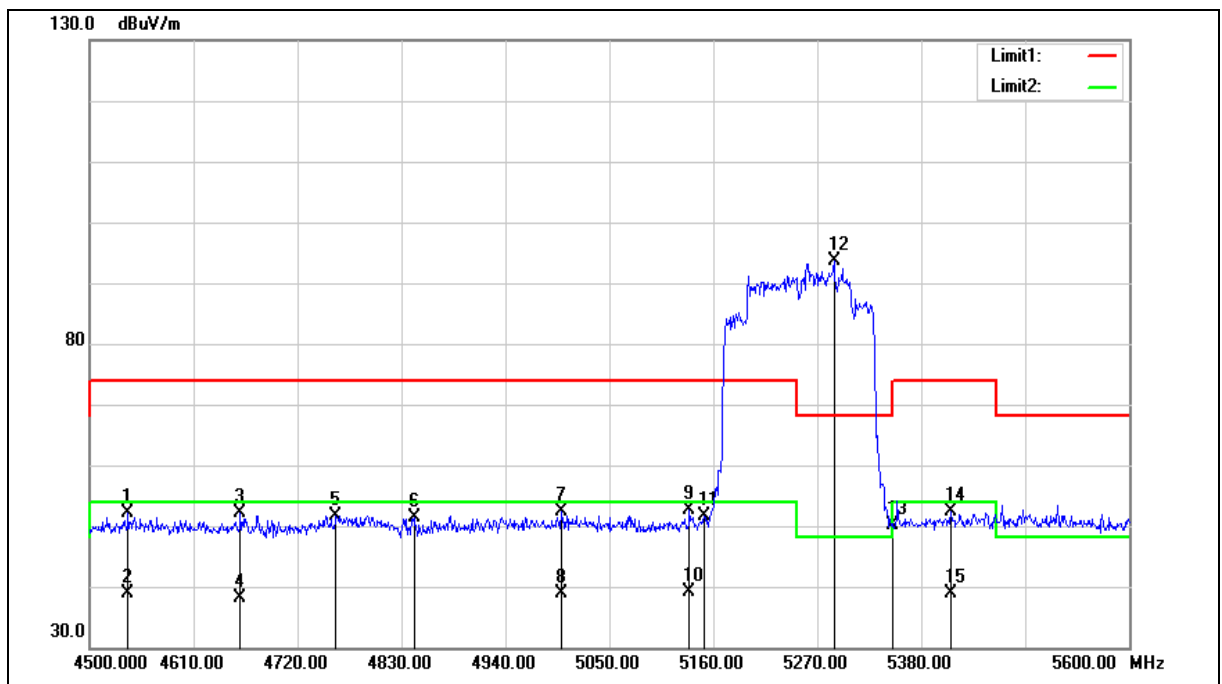

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5250MHz		
Mode:	Mode 18		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4540.700	54.20	-2.04	52.16	74.00	-21.84	peak
2	4540.700	40.87	-2.04	38.83	54.00	-15.17	AVG
3	4659.500	53.73	-1.70	52.03	74.00	-21.97	peak
4	4659.500	39.90	-1.70	38.20	54.00	-15.80	AVG
5	4760.700	53.16	-1.42	51.74	74.00	-22.26	peak
6	4843.200	52.61	-1.20	51.41	74.00	-22.59	peak
7	4999.400	53.04	-0.77	52.27	74.00	-21.73	peak
8	4999.400	39.77	-0.77	39.00	54.00	-15.00	AVG
9	5134.700	53.07	-0.51	52.56	74.00	-21.44	peak
10	5134.700	39.63	-0.51	39.12	54.00	-14.88	AVG
11	5150.000	52.17	-0.48	51.69	74.00	-22.31	peak
12	5287.600	93.78	-0.20	93.58	--	--	peak
13	5350.000	50.24	-0.08	50.16	74.00	-23.84	peak
14	5410.800	52.33	0.04	52.37	74.00	-21.63	peak
15	5410.800	38.96	0.04	39.00	54.00	-15.00	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5250MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

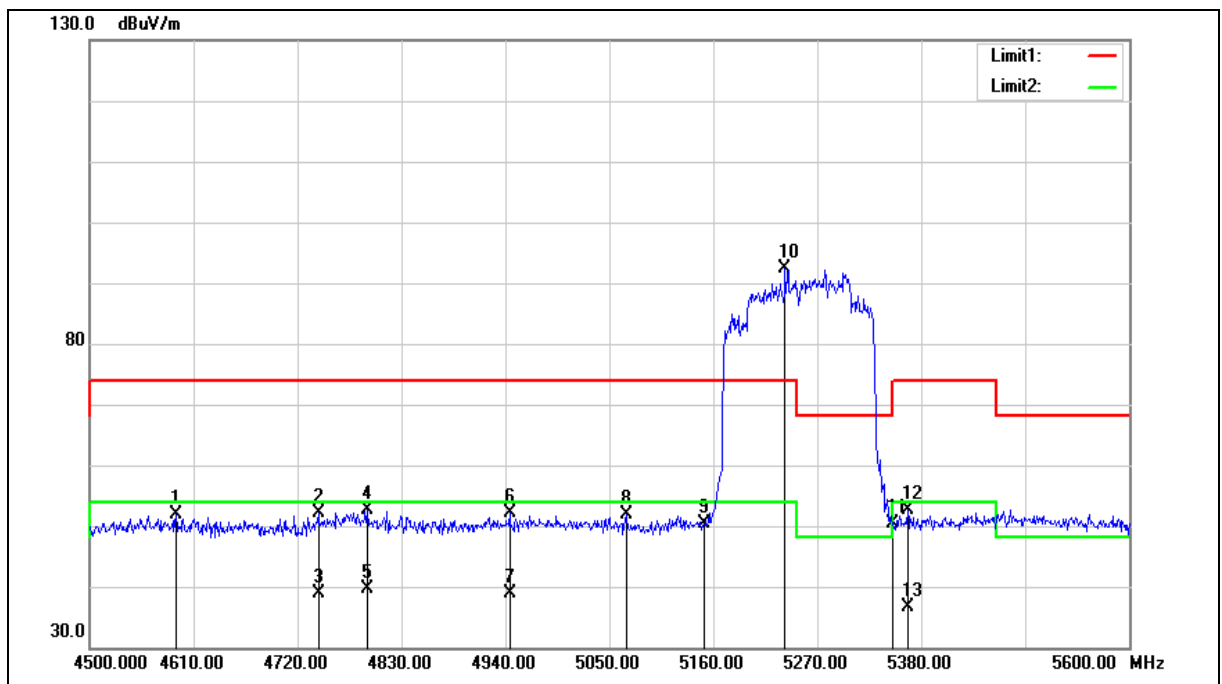

Standard:	LP0002	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5250MHz		
Mode:	Mode 18		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4591.300	53.84	-1.90	51.94	74.00	-22.06	peak
2	4742.000	53.60	-1.47	52.13	74.00	-21.87	peak
3	4742.000	40.33	-1.47	38.86	54.00	-15.14	AVG
4	4793.700	53.87	-1.34	52.53	74.00	-21.47	peak
5	4793.700	40.86	-1.34	39.52	54.00	-14.48	AVG
6	4944.400	53.00	-0.93	52.07	74.00	-21.93	peak
7	4944.400	39.72	-0.93	38.79	54.00	-15.21	AVG
8	5067.600	52.61	-0.64	51.97	74.00	-22.03	peak
9	5150.000	50.83	-0.48	50.35	74.00	-23.65	peak
10	5235.900	92.65	-0.31	92.34	--	--	peak
11	5350.000	50.56	-0.08	50.48	74.00	-23.52	peak
12	5365.700	52.76	-0.05	52.71	74.00	-21.29	peak
13	5365.700	36.68	-0.05	36.63	54.00	-17.37	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

With HDMI

其它不必要之訊號 (1 GHz 以下)

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5500 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

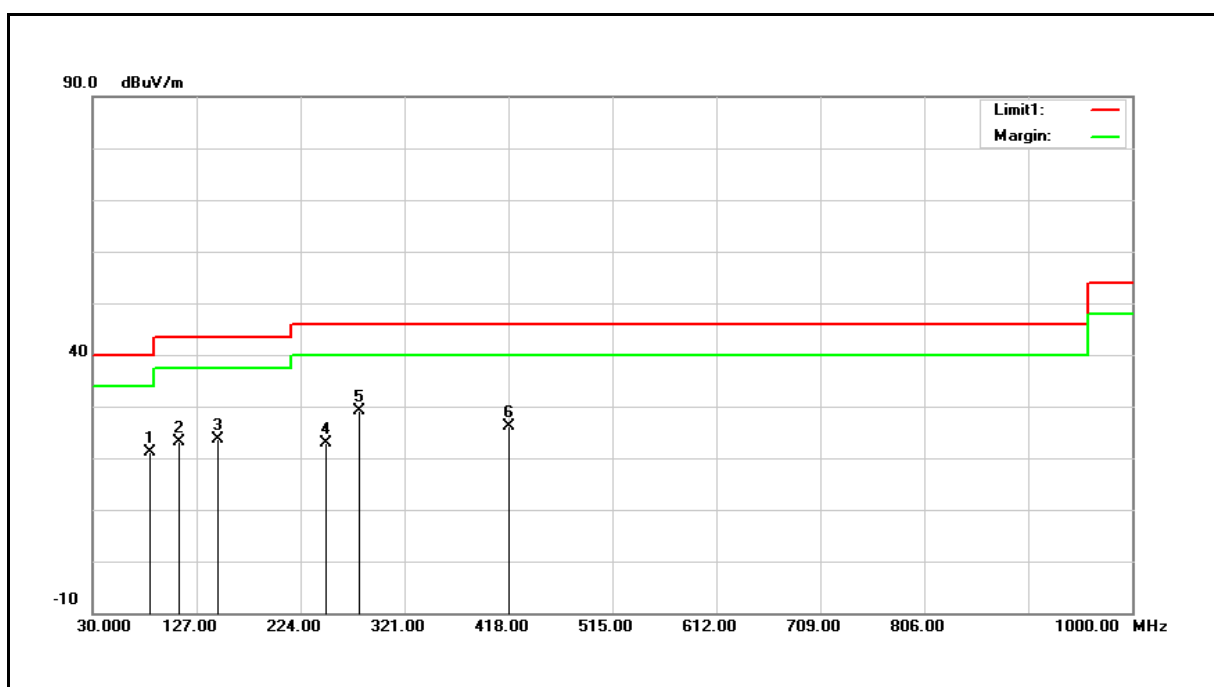

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	83.3500	34.33	-13.16	21.17	40.00	-18.83	QP
2	110.5100	34.17	-10.94	23.23	43.50	-20.27	QP
3	147.3700	31.42	-7.70	23.72	43.50	-19.78	QP
4	248.2500	31.26	-8.29	22.97	46.00	-23.03	QP
5	279.2900	36.23	-7.05	29.18	46.00	-16.82	QP
6	418.0000	30.51	-4.48	26.03	46.00	-19.97	QP


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 21.17 = -13.16 + 34.33

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5500 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

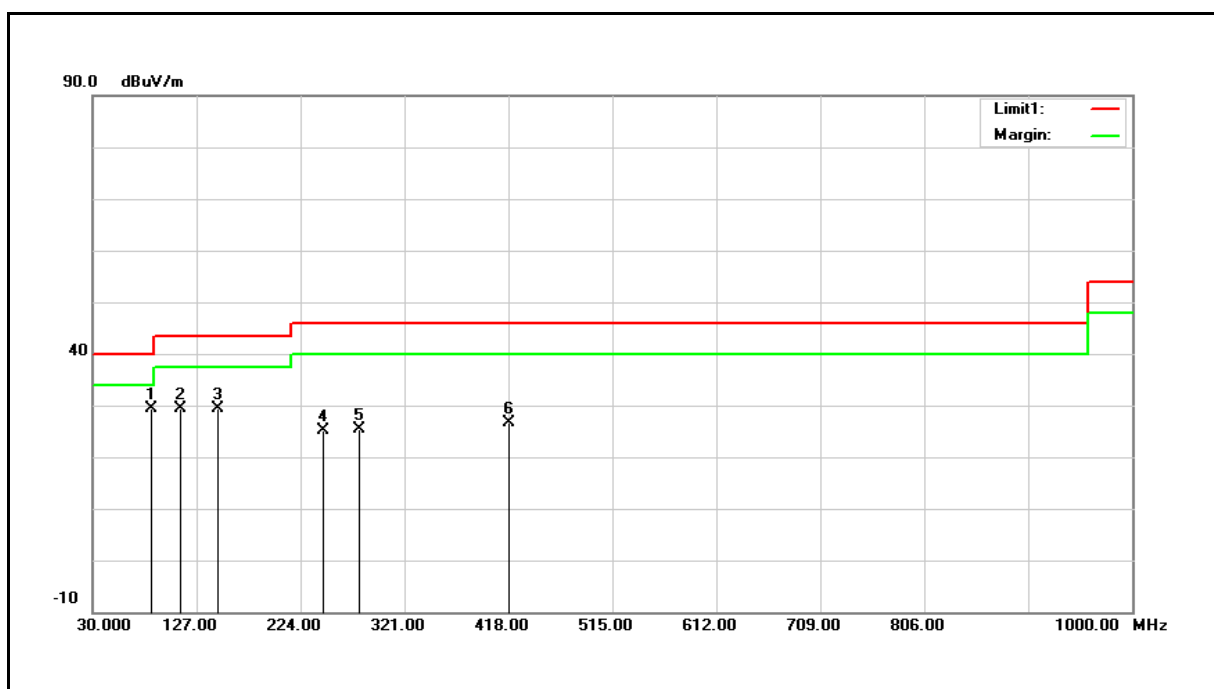

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	84.3200	42.76	-13.31	29.45	40.00	-10.55	QP
2	111.4800	40.26	-10.84	29.42	43.50	-14.08	QP
3	147.3700	36.97	-7.70	29.27	43.50	-14.23	QP
4	245.3400	33.60	-8.36	25.24	46.00	-20.76	QP
5	279.2900	32.42	-7.05	25.37	46.00	-20.63	QP
6	418.9700	30.97	-4.45	26.52	46.00	-19.48	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: $29.45 = -13.31 + 42.76$

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

場強輻射量測 (1 GHz 以上)

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 15		
Ant.Polar.:	Horizontal		

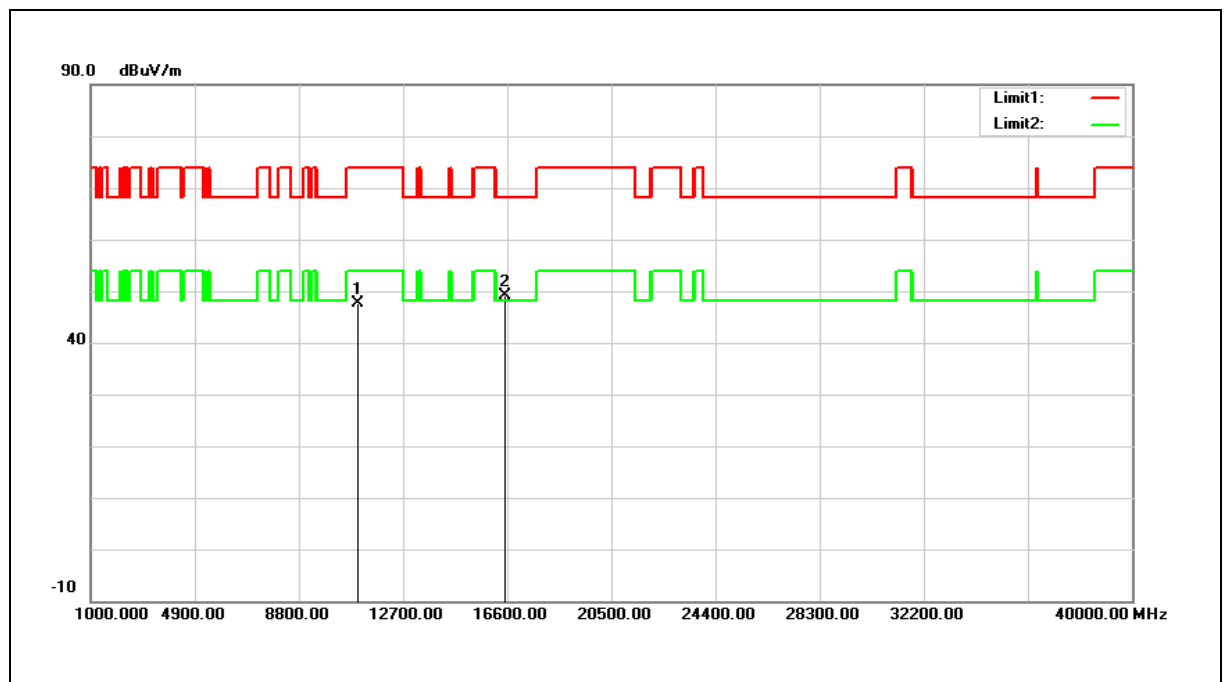

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	35.30	12.39	47.69	74.00	-26.31	peak
2	16500.000	34.91	14.24	49.15	68.20	-19.05	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 47.69 = 12.39 + 35.30

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 15		
Ant.Polar.:	Vertical		

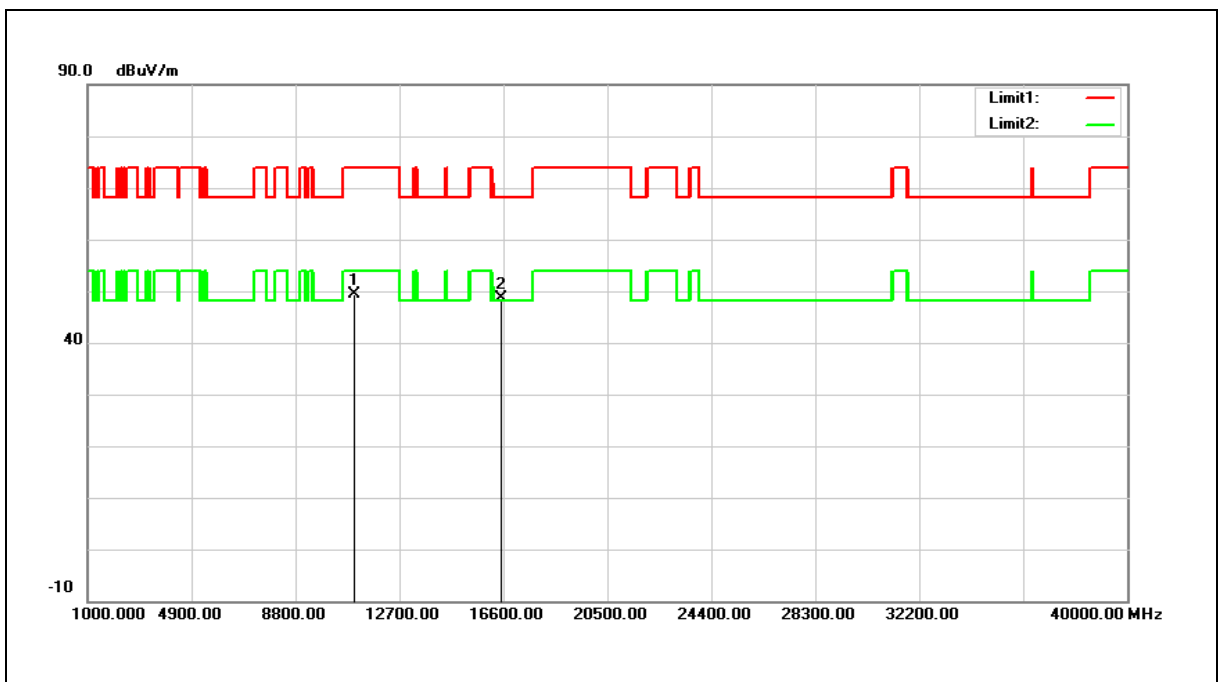

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	36.93	12.39	49.32	74.00	-24.68	peak
2	16500.000	34.30	14.24	48.54	68.20	-19.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: $49.32 = 12.39 + 36.93$

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Annex E. Conducted Test Results (5 GHz)

Maximum Conducted Output Power

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)						
				ANT-0		ANT-1		ANT-0+1		Limit (dBm)
				dBm	W	dBm	W	dBm	W	
Mode 8	6	36	5180	7.29	0.005	7.20	0.005	---	---	≤ 24.00
		40	5200	7.40	0.005	7.29	0.005	---	---	≤ 24.00
		44	5220	7.32	0.005	7.20	0.005	---	---	≤ 24.00
		48	5240	7.59	0.006	7.39	0.005	---	---	≤ 24.00
		52	5260	7.57	0.006	7.38	0.005	---	---	≤ 24.00
		56	5280	7.39	0.005	7.28	0.005	---	---	≤ 24.00
		60	5300	7.31	0.005	7.19	0.005	---	---	≤ 24.00
		64	5320	7.41	0.006	7.29	0.005	---	---	≤ 24.00
		100	5500	7.29	0.005	7.09	0.005	---	---	≤ 24.00
		104	5520	7.18	0.005	7.17	0.005	---	---	≤ 24.00
		108	5540	7.18	0.005	7.16	0.005	---	---	≤ 24.00
		112	5560	7.21	0.005	7.08	0.005	---	---	≤ 24.00
		116	5580	7.17	0.005	7.15	0.005	---	---	≤ 24.00
		132	5660	7.17	0.005	7.14	0.005	---	---	≤ 24.00
		136	5680	7.15	0.005	7.14	0.005	---	---	≤ 24.00
		140	5700	7.17	0.005	7.11	0.005	---	---	≤ 24.00
		149	5745	7.29	0.005	7.19	0.005	---	---	≤ 30.00
		153	5765	7.31	0.005	7.28	0.005	---	---	≤ 30.00
		157	5785	7.35	0.005	7.29	0.005	---	---	≤ 30.00
		161	5805	7.29	0.005	7.27	0.005	---	---	≤ 30.00
		165	5825	7.41	0.006	7.33	0.005	---	---	≤ 30.00

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)						
				ANT-0		ANT-1		ANT-0+1		Limit (dBm)
				dBm	W	dBm	W	dBm	W	
Mode 9	13	36	5180	7.01	0.005	6.97	0.005	10.00	0.010	≤ 24.00
		40	5200	7.04	0.005	7.01	0.005	10.04	0.010	≤ 24.00
		44	5220	7.01	0.005	6.96	0.005	10.00	0.010	≤ 24.00
		48	5240	7.25	0.005	7.17	0.005	10.22	0.011	≤ 24.00
		52	5260	7.15	0.005	7.04	0.005	10.11	0.010	≤ 24.00
		56	5280	7.05	0.005	7.04	0.005	10.06	0.010	≤ 24.00
		60	5300	7.04	0.005	7.03	0.005	10.05	0.010	≤ 24.00
		64	5320	7.03	0.005	7.00	0.005	10.03	0.010	≤ 24.00
		100	5500	7.10	0.005	7.03	0.005	10.08	0.010	≤ 24.00
		104	5520	7.04	0.005	7.01	0.005	10.04	0.010	≤ 24.00
		108	5540	7.04	0.005	7.01	0.005	10.04	0.010	≤ 24.00
		112	5560	7.05	0.005	7.02	0.005	10.05	0.010	≤ 24.00
		116	5580	7.03	0.005	7.01	0.005	10.03	0.010	≤ 24.00
		132	5660	7.02	0.005	7.01	0.005	10.03	0.010	≤ 24.00
		136	5680	7.02	0.005	7.01	0.005	10.03	0.010	≤ 24.00
		140	5700	7.12	0.005	7.01	0.005	10.08	0.010	≤ 24.00
		149	5745	7.12	0.005	7.04	0.005	10.09	0.010	≤ 30.00
		153	5765	7.03	0.005	6.95	0.005	10.00	0.010	≤ 30.00
		157	5785	7.05	0.005	7.01	0.005	10.04	0.010	≤ 30.00
		161	5805	7.04	0.005	6.98	0.005	10.02	0.010	≤ 30.00
		165	5825	7.27	0.005	7.12	0.005	10.21	0.010	≤ 30.00
Mode 10	27	38	5190	7.32	0.005	7.11	0.005	10.23	0.011	≤ 24.00
		46	5230	7.29	0.005	7.27	0.005	10.29	0.011	≤ 24.00
		54	5270	7.27	0.005	7.22	0.005	10.26	0.011	≤ 24.00
		62	5310	7.29	0.005	7.20	0.005	10.26	0.011	≤ 24.00
		102	5510	7.10	0.005	7.05	0.005	10.09	0.010	≤ 24.00
		110	5550	7.08	0.005	7.06	0.005	10.08	0.010	≤ 24.00
		134	5670	7.07	0.005	7.04	0.005	10.07	0.010	≤ 24.00
		151	5755	7.31	0.005	7.04	0.005	10.19	0.010	≤ 30.00
		159	5795	7.22	0.005	7.14	0.005	10.19	0.010	≤ 30.00

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)						
				ANT-0		ANT-1		ANT-0+1		Limit (dBm)
				dBm	W	dBm	W	dBm	W	
Mode 11	13	36	5180	7.02	0.005	6.99	0.005	10.02	0.010	≤ 24.00
		40	5200	7.11	0.005	7.01	0.005	10.07	0.010	≤ 24.00
		44	5220	7.04	0.005	7.01	0.005	10.04	0.010	≤ 24.00
		48	5240	7.27	0.005	7.18	0.005	10.24	0.011	≤ 24.00
		52	5260	7.17	0.005	7.05	0.005	10.12	0.010	≤ 24.00
		56	5280	7.07	0.005	7.05	0.005	10.07	0.010	≤ 24.00
		60	5300	7.05	0.005	7.04	0.005	10.06	0.010	≤ 24.00
		64	5320	7.04	0.005	7.01	0.005	10.04	0.010	≤ 24.00
		100	5500	7.11	0.005	7.04	0.005	10.09	0.010	≤ 24.00
		104	5520	7.05	0.005	7.02	0.005	10.05	0.010	≤ 24.00
		108	5540	7.05	0.005	7.02	0.005	10.05	0.010	≤ 24.00
		112	5560	7.07	0.005	7.03	0.005	10.06	0.010	≤ 24.00
		116	5580	7.04	0.005	7.02	0.005	10.04	0.010	≤ 24.00
		132	5660	7.03	0.005	7.02	0.005	10.04	0.010	≤ 24.00
		136	5680	7.03	0.005	7.02	0.005	10.04	0.010	≤ 24.00
		140	5700	7.14	0.005	7.02	0.005	10.09	0.010	≤ 24.00
		149	5745	7.14	0.005	7.05	0.005	10.11	0.010	≤ 30.00
		153	5765	7.04	0.005	7.00	0.005	10.03	0.010	≤ 30.00
		157	5785	7.06	0.005	7.02	0.005	10.05	0.010	≤ 30.00
		161	5805	7.05	0.005	6.99	0.005	10.03	0.010	≤ 30.00
		165	5825	7.31	0.005	7.13	0.005	10.23	0.011	≤ 30.00
Mode 12	27	38	5190	7.35	0.005	7.15	0.005	10.26	0.011	≤ 24.00
		46	5230	7.34	0.005	7.29	0.005	10.33	0.011	≤ 24.00
		54	5270	7.29	0.005	7.24	0.005	10.28	0.011	≤ 24.00
		62	5310	7.32	0.005	7.21	0.005	10.28	0.011	≤ 24.00
		102	5510	7.11	0.005	7.07	0.005	10.10	0.010	≤ 24.00
		110	5550	7.09	0.005	7.07	0.005	10.09	0.010	≤ 24.00
		134	5670	7.08	0.005	7.05	0.005	10.08	0.010	≤ 24.00
		151	5755	7.37	0.005	7.05	0.005	10.22	0.011	≤ 30.00
		159	5795	7.25	0.005	7.17	0.005	10.22	0.011	≤ 30.00
Mode 13	58.5	42	5210	7.27	0.005	7.09	0.005	10.19	0.010	≤ 24.00
		58	5290	7.39	0.005	7.15	0.005	10.28	0.011	≤ 24.00
		106	5530	7.17	0.005	7.06	0.005	10.13	0.010	≤ 24.00
		155	5775	7.11	0.005	7.12	0.005	10.13	0.010	≤ 30.00
Mode 14	117	50	5250	4.76	0.003	4.17	0.003	7.49	0.006	≤ 24.00
		50	5250	4.50	0.003	4.12	0.003	7.32	0.005	≤ 24.00

操作模式	Data Rate (Mbps)	頻道 CH	頻率 MHz	最大傳導輸出功率(Average)						
				ANT-0		ANT-1		ANT-0+1		Limit (dBm)
				dBm	W	dBm	W	dBm	W	
Mode 15	MCS0	36	5180	7.05	0.005	7.27	0.005	10.17	0.010	≤ 24.00
		40	5200	7.15	0.005	7.04	0.005	10.11	0.010	≤ 24.00
		44	5220	7.05	0.005	7.02	0.005	10.05	0.010	≤ 24.00
		48	5240	7.28	0.005	7.21	0.005	10.26	0.011	≤ 24.00
		52	5260	7.19	0.005	7.06	0.005	10.14	0.010	≤ 24.00
		56	5280	7.09	0.005	7.08	0.005	10.10	0.010	≤ 24.00
		60	5300	7.08	0.005	7.07	0.005	10.09	0.010	≤ 24.00
		64	5320	7.07	0.005	7.11	0.005	10.10	0.010	≤ 24.00
		100	5500	7.12	0.005	7.05	0.005	10.10	0.010	≤ 24.00
		104	5520	7.07	0.005	7.03	0.005	10.06	0.010	≤ 24.00
		108	5540	7.07	0.005	7.03	0.005	10.06	0.010	≤ 24.00
		112	5560	7.15	0.005	7.08	0.005	10.13	0.010	≤ 24.00
		116	5580	7.08	0.005	7.03	0.005	10.07	0.010	≤ 24.00
		132	5660	7.08	0.005	7.05	0.005	10.08	0.010	≤ 24.00
		136	5680	7.08	0.005	7.05	0.005	10.08	0.010	≤ 24.00
		140	5700	7.18	0.005	7.04	0.005	10.12	0.010	≤ 24.00
		149	5745	7.17	0.005	7.07	0.005	10.13	0.010	≤ 30.00
		153	5765	7.05	0.005	7.18	0.005	10.13	0.010	≤ 30.00
		157	5785	7.15	0.005	7.20	0.005	10.19	0.010	≤ 30.00
		161	5805	7.07	0.005	7.17	0.005	10.13	0.010	≤ 30.00
		165	5825	7.37	0.005	7.15	0.005	10.27	0.011	≤ 30.00
Mode 16	MCS0	38	5190	7.38	0.005	7.18	0.005	10.29	0.011	≤ 24.00
		46	5230	7.39	0.005	7.31	0.005	10.36	0.011	≤ 24.00
		54	5270	7.31	0.005	7.25	0.005	10.29	0.011	≤ 24.00
		62	5310	7.33	0.005	7.23	0.005	10.29	0.011	≤ 24.00
		102	5510	7.12	0.005	7.08	0.005	10.11	0.010	≤ 24.00
		110	5550	7.13	0.005	7.10	0.005	10.13	0.010	≤ 24.00
		134	5670	7.09	0.005	7.07	0.005	10.09	0.010	≤ 24.00
		151	5755	7.39	0.005	7.09	0.005	10.25	0.011	≤ 30.00
		159	5795	7.27	0.005	7.19	0.005	10.24	0.011	≤ 30.00
Mode 17	MCS0	42	5210	7.28	0.005	7.11	0.005	10.21	0.010	≤ 24.00
		58	5290	7.41	0.006	7.16	0.005	10.30	0.011	≤ 24.00
		106	5530	7.18	0.005	7.07	0.005	10.14	0.010	≤ 24.00
		155	5775	7.13	0.005	7.14	0.005	10.15	0.010	≤ 30.00
Mode 18	MCS0	50	5250	4.91	0.003	4.39	0.003	7.67	0.006	≤ 24.00
		50	5250	4.60	0.003	4.20	0.003	7.41	0.006	≤ 24.00

Maximum Power Spectral Density

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 8	36	5180	-3.395	0.062	-3.333	11.00
	40	5200	-3.388	0.062	-3.326	11.00
	48	5240	-2.943	0.062	-2.881	11.00
	52	5260	-3.090	0.062	-3.028	11.00
	56	5280	-3.348	0.062	-3.286	11.00
	64	5320	-3.443	0.062	-3.381	11.00
	100	5500	-3.657	0.062	-3.595	11.00
	112	5560	-3.761	0.062	-3.699	11.00
Mode 15	140	5700	-3.738	0.062	-3.676	11.00
	36	5180	-4.303	0.022	-4.281	11.00
	40	5200	-4.001	0.022	-3.979	11.00
	48	5240	-3.700	0.022	-3.678	11.00
	52	5260	-3.777	0.022	-3.755	11.00
	56	5280	-4.086	0.022	-4.064	11.00
	64	5320	-4.151	0.022	-4.129	11.00
	100	5500	-3.876	0.022	-3.854	11.00
Mode 16	112	5560	-4.043	0.022	-4.021	11.00
	140	5700	-3.990	0.022	-3.968	11.00
	38	5190	-7.241	0.033	-7.208	11.00
	46	5230	-6.880	0.033	-6.847	11.00
	54	5270	-6.949	0.033	-6.916	11.00
	62	5310	-6.938	0.033	-6.905	11.00
	102	5510	-7.358	0.033	-7.325	11.00
Mode 17	110	5550	-7.417	0.033	-7.384	11.00
	134	5670	-7.360	0.033	-7.327	11.00
	42	5210	-9.780	0.032	-9.748	11.00
Mode 18	58	5290	-9.629	0.032	-9.597	11.00
	106	5530	-10.159	0.032	-10.127	11.00
	50	5250	-11.902	0.039	-11.863	11.00
	50	5250	-12.394	0.039	-12.355	11.00

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT-0						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 8	149	5745	-12.510	0.062	-5.459	30.00
	157	5785	-12.581	0.062	-5.530	30.00
	165	5825	-12.208	0.062	-5.157	30.00
Mode 15	149	5745	-13.785	0.022	-6.774	30.00
	157	5785	-13.895	0.022	-6.884	30.00
	165	5825	-13.187	0.022	-6.176	30.00
Mode 16	151	5755	-16.922	0.033	-9.900	30.00
	159	5795	-17.214	0.033	-10.192	30.00
Mode 17	155	5775	-20.170	0.032	-13.148	30.00

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ratio = 10*Log(500 kHz/100 kHz)

ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/MHz)	Duty Factor (dB)	轉換值 (dBm/MHz)	限制值 (dBm/MHz)
Mode 15	36	5180	-4.039	0.022	-4.017	11.00
	40	5200	-3.702	0.022	-3.680	11.00
	48	5240	-3.453	0.022	-3.431	11.00
	52	5260	-3.687	0.022	-3.665	11.00
	56	5280	-3.569	0.022	-3.547	11.00
	64	5320	-3.931	0.022	-3.909	11.00
	100	5500	-3.698	0.022	-3.676	11.00
	112	5560	-3.351	0.022	-3.329	11.00
Mode 16	140	5700	-3.889	0.022	-3.867	11.00
	38	5190	-6.903	0.033	-6.870	11.00
	46	5230	-6.865	0.033	-6.832	11.00
	54	5270	-6.741	0.033	-6.708	11.00
	62	5310	-6.812	0.033	-6.779	11.00
	102	5510	-7.257	0.033	-7.224	11.00
	110	5550	-7.007	0.033	-6.974	11.00
Mode 17	134	5670	-7.424	0.033	-7.391	11.00
	42	5210	-9.924	0.032	-9.892	11.00
	58	5290	-9.657	0.032	-9.625	11.00
Mode 18	106	5530	-9.990	0.032	-9.958	11.00
	50	5250	-12.060	0.039	-12.021	11.00
	50	5250	-12.073	0.039	-12.034	11.00

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT-1						
操作模式	頻道 (CH)	頻率 (MHz)	量測值 (dBm/100 kHz)	Duty Factor (dB)	轉換值 (dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 15	149	5745	-13.855	0.022	-6.844	30.00
	157	5785	-13.539	0.022	-6.528	30.00
	165	5825	-13.696	0.022	-6.685	30.00
Mode 16	151	5755	-17.198	0.033	-10.176	30.00
	159	5795	-16.983	0.033	-9.961	30.00
Mode 17	155	5775	-20.146	0.032	-13.124	30.00

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ration = 10*Log(500 kHz/100 kHz)

ANT-0+1				
操作模式	頻道 (CH)	頻率 (MHz)	計算值(dBm/MHz)	限制值 (dBm/MHz)
Mode 15	36	5180	-1.137	11.00
	40	5200	-0.817	11.00
	48	5240	-0.543	11.00
	52	5260	-0.700	11.00
	56	5280	-0.788	11.00
	64	5320	-1.008	11.00
	100	5500	-0.754	11.00
	112	5560	-0.651	11.00
Mode 16	140	5700	-0.907	11.00
	38	5190	-4.026	11.00
	46	5230	-3.830	11.00
	54	5270	-3.801	11.00
	62	5310	-3.832	11.00
	102	5510	-4.264	11.00
	110	5550	-4.164	11.00
Mode 17	134	5670	-4.349	11.00
	42	5210	-6.809	11.00
	58	5290	-6.600	11.00
Mode 18	106	5530	-7.031	11.00
	50	5250	-8.931	11.00
	50	5250	-9.181	11.00

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

ANT-0+1				
操作模式	頻道 (CH)	頻率 (MHz)	計算值(dBm/500 kHz)	限制值 (dBm/500 kHz)
Mode 15	149	5745	-3.798	30.00
	157	5785	-3.692	30.00
	165	5825	-3.412	30.00
Mode 16	151	5755	-7.025	30.00
	159	5795	-7.064	30.00
Mode 17	155	5775	-10.126	30.00

Note: Power Density = measured result + 10 log (1/duty cycle) + Conversion ratio = measured result + duty factory.

Conversion ration = 10*Log(500 kHz/100 kHz)

Mode 8: IEEE 802.11a Continuous TX Mode_ANT-0

CH36



CH40



CH48



Mode 8: IEEE 802.11a Continuous TX Mode _ANT-0

CH52



CH56



CH64



Mode 8: IEEE 802.11a Continuous TX Mode_ANT-0


CH100



CH112




CH140

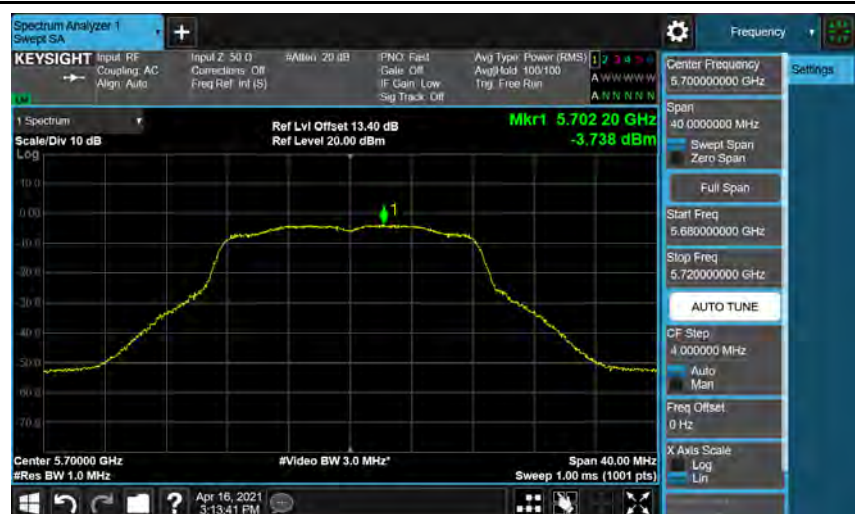

Mode 8: IEEE 802.11a Continuous TX Mode_ANT-0


CH149

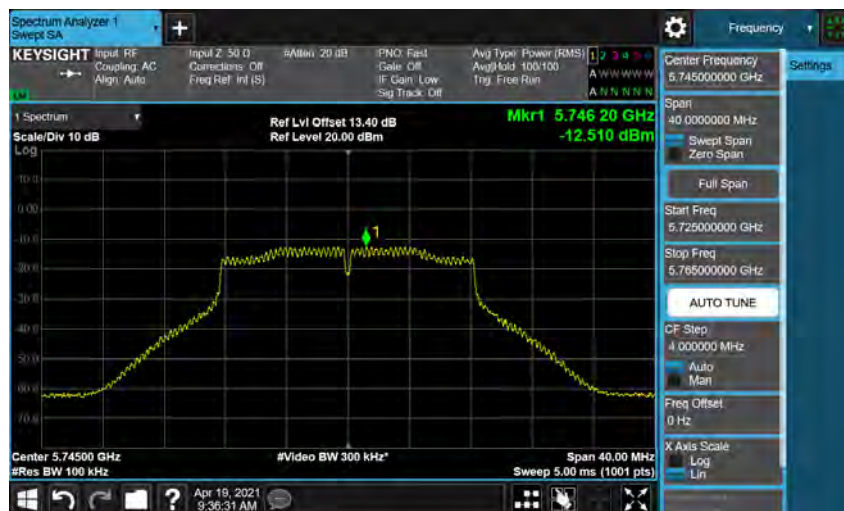



CH157




CH165

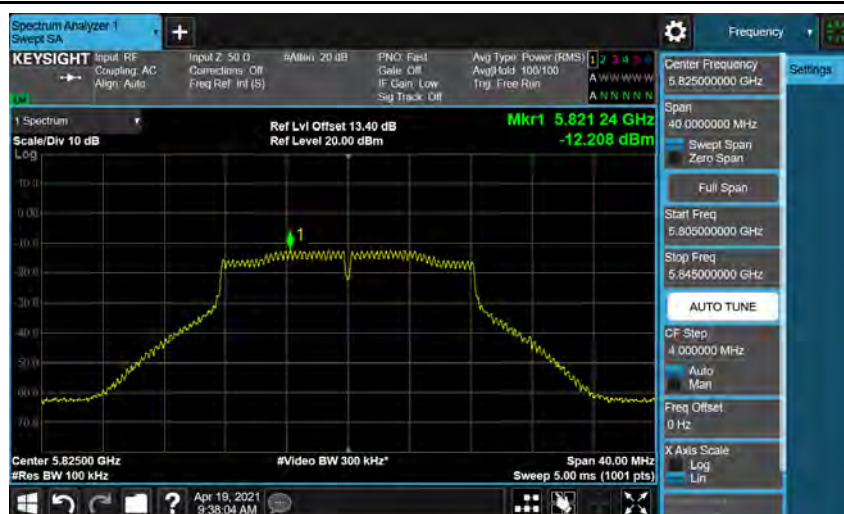

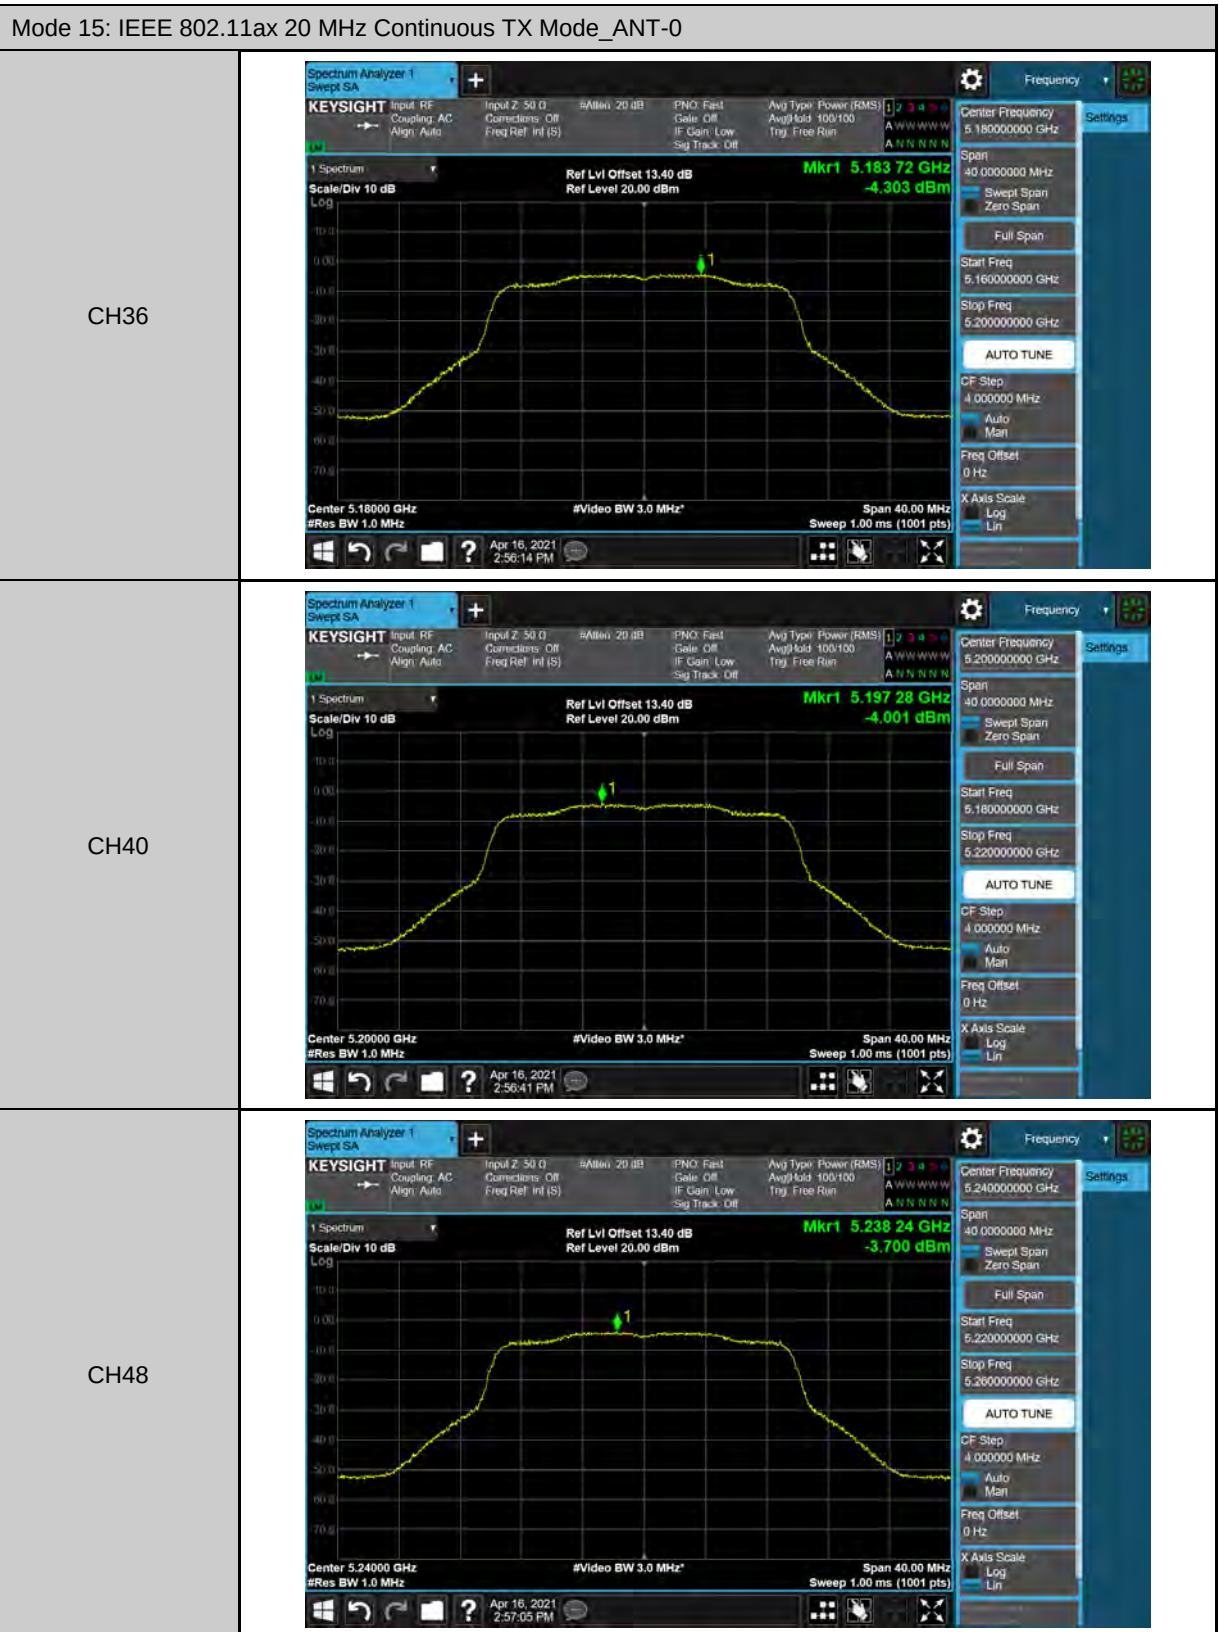

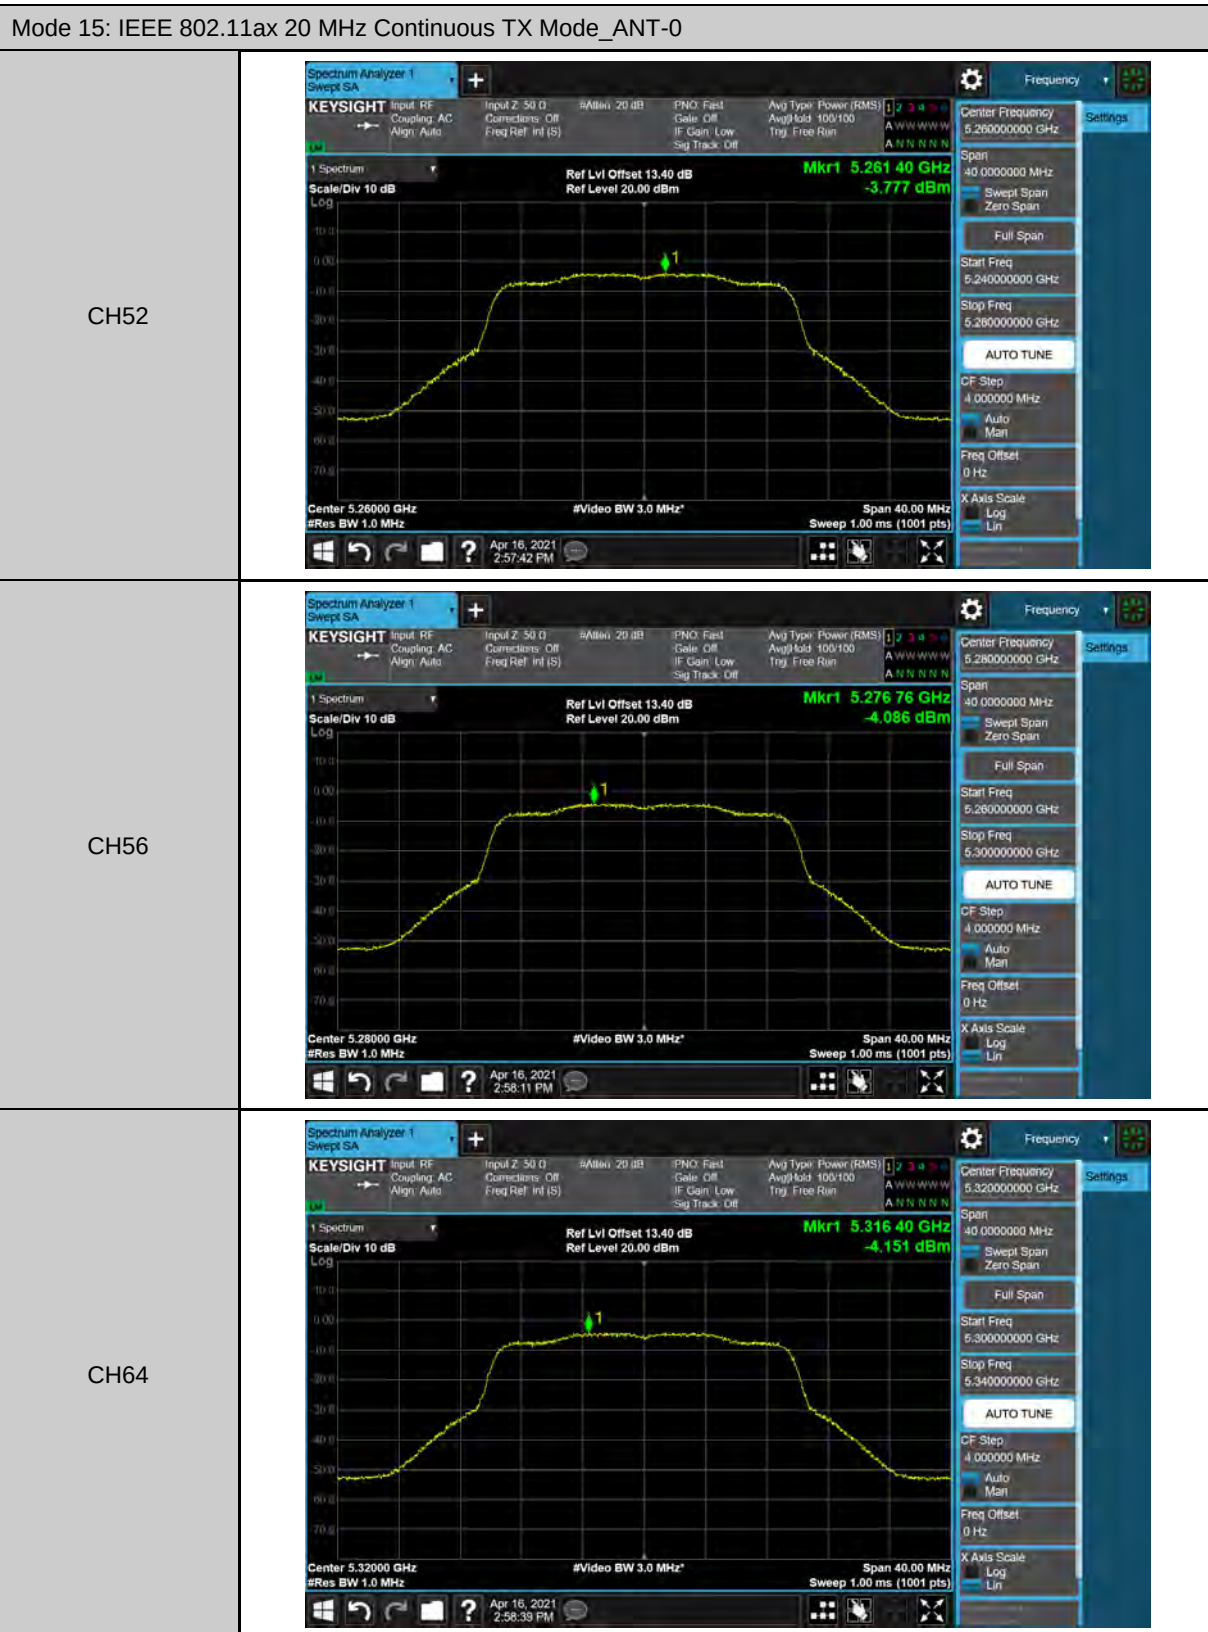



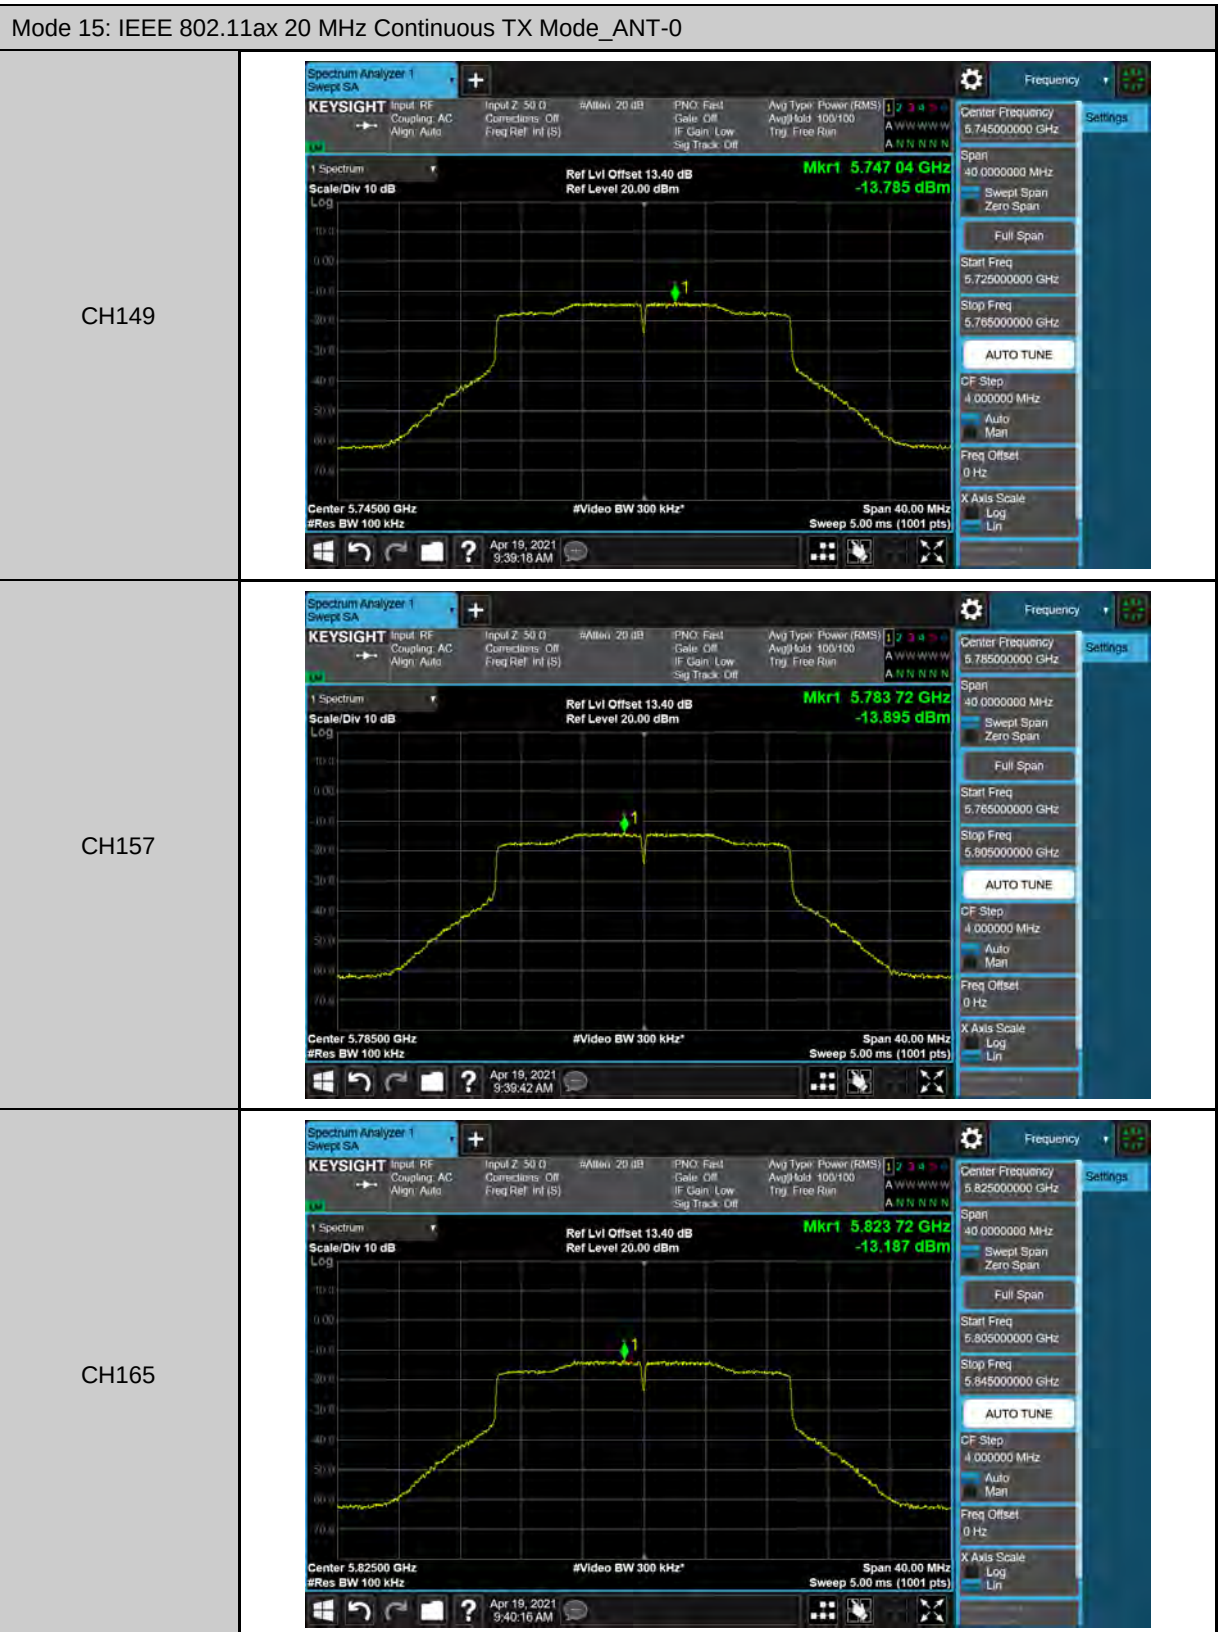






Mode 16: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-0


CH102



CH110

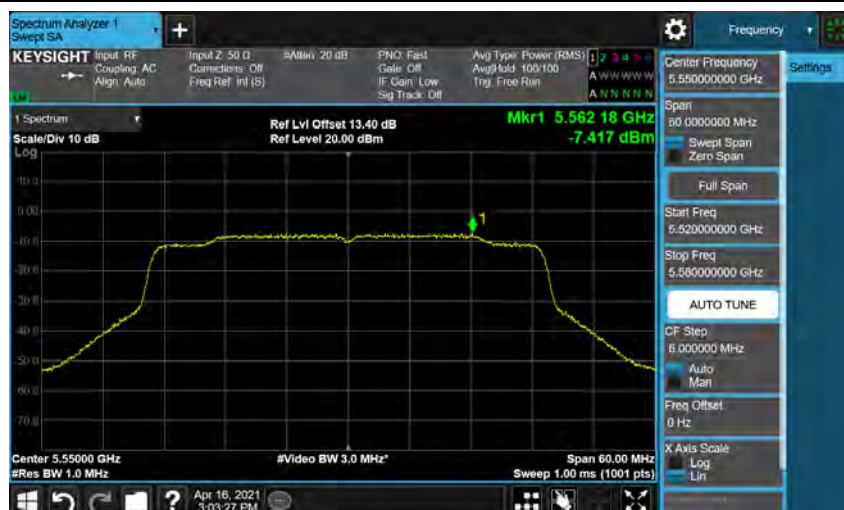

CH134

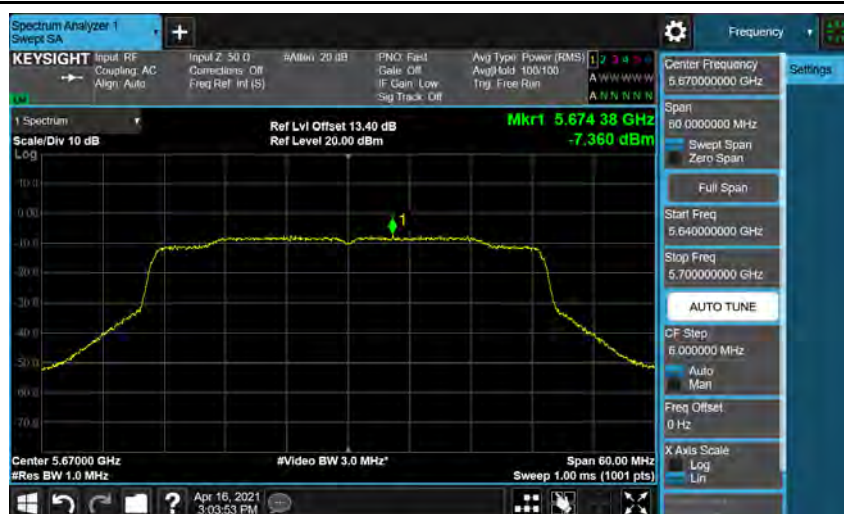











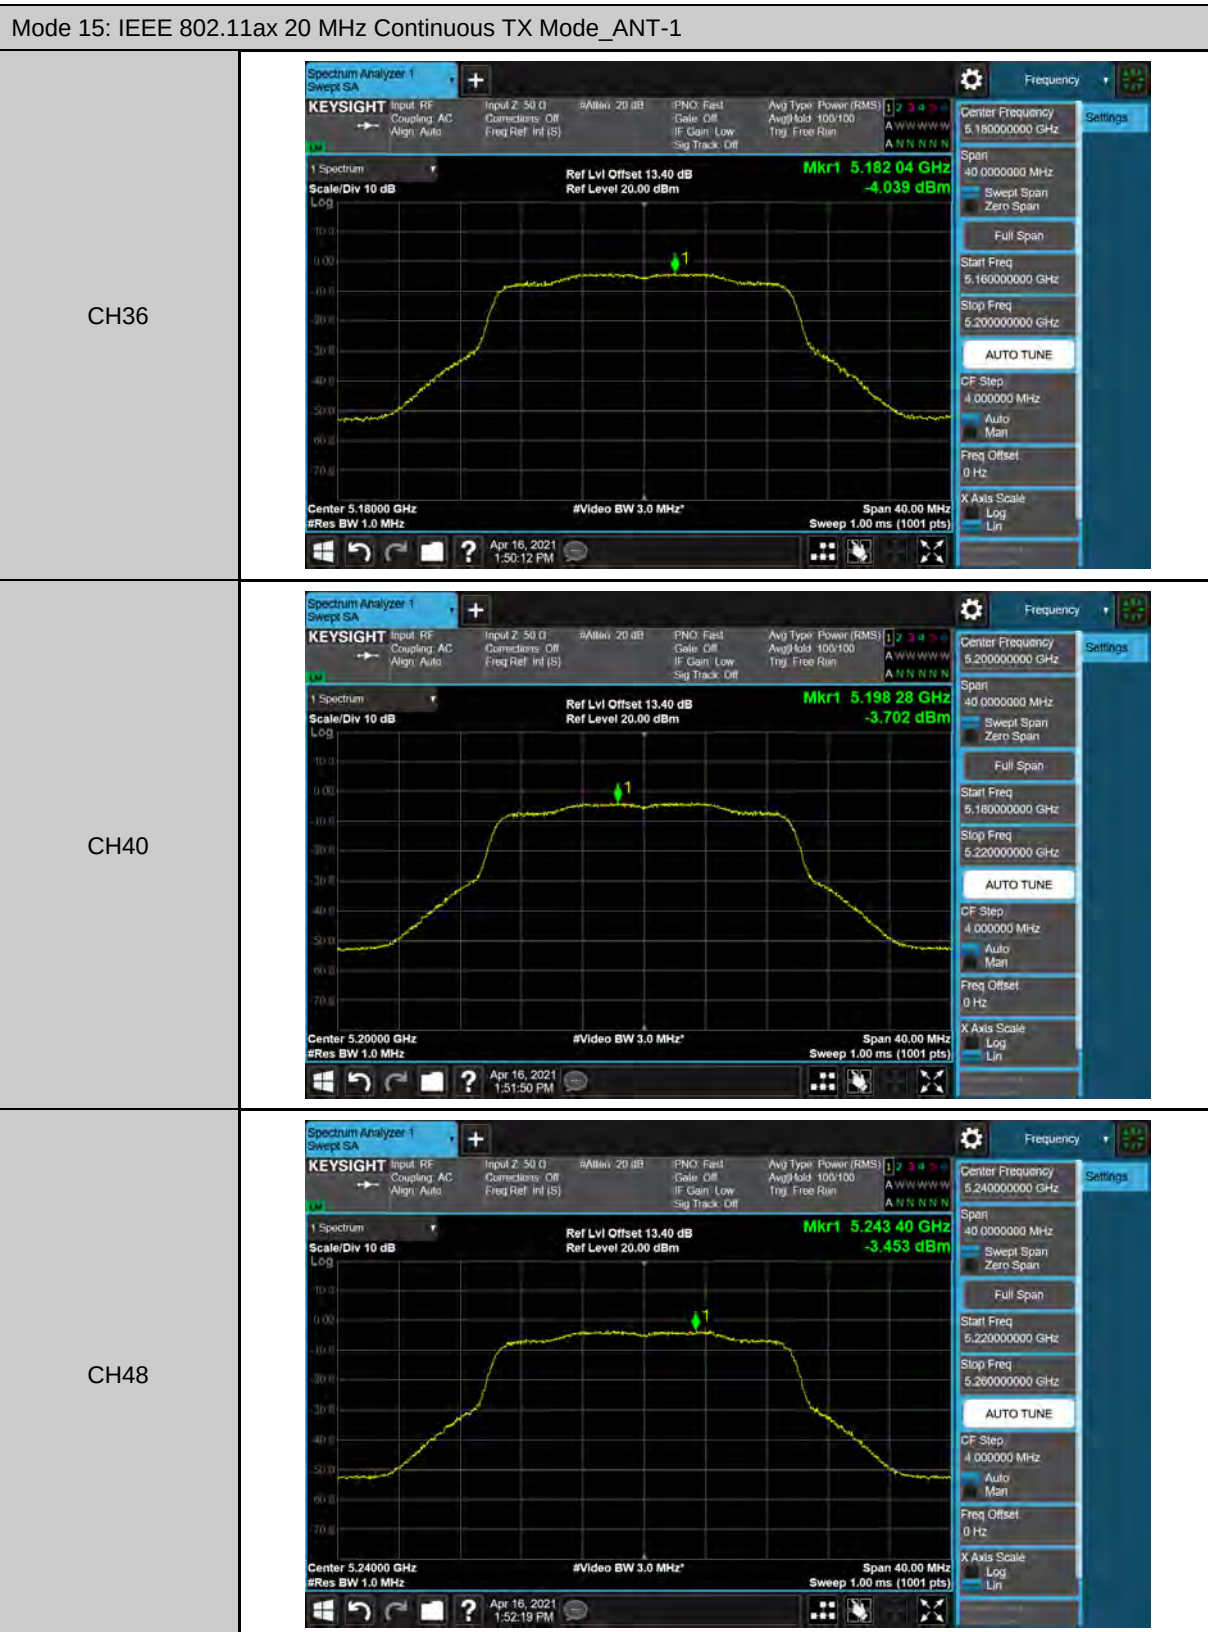

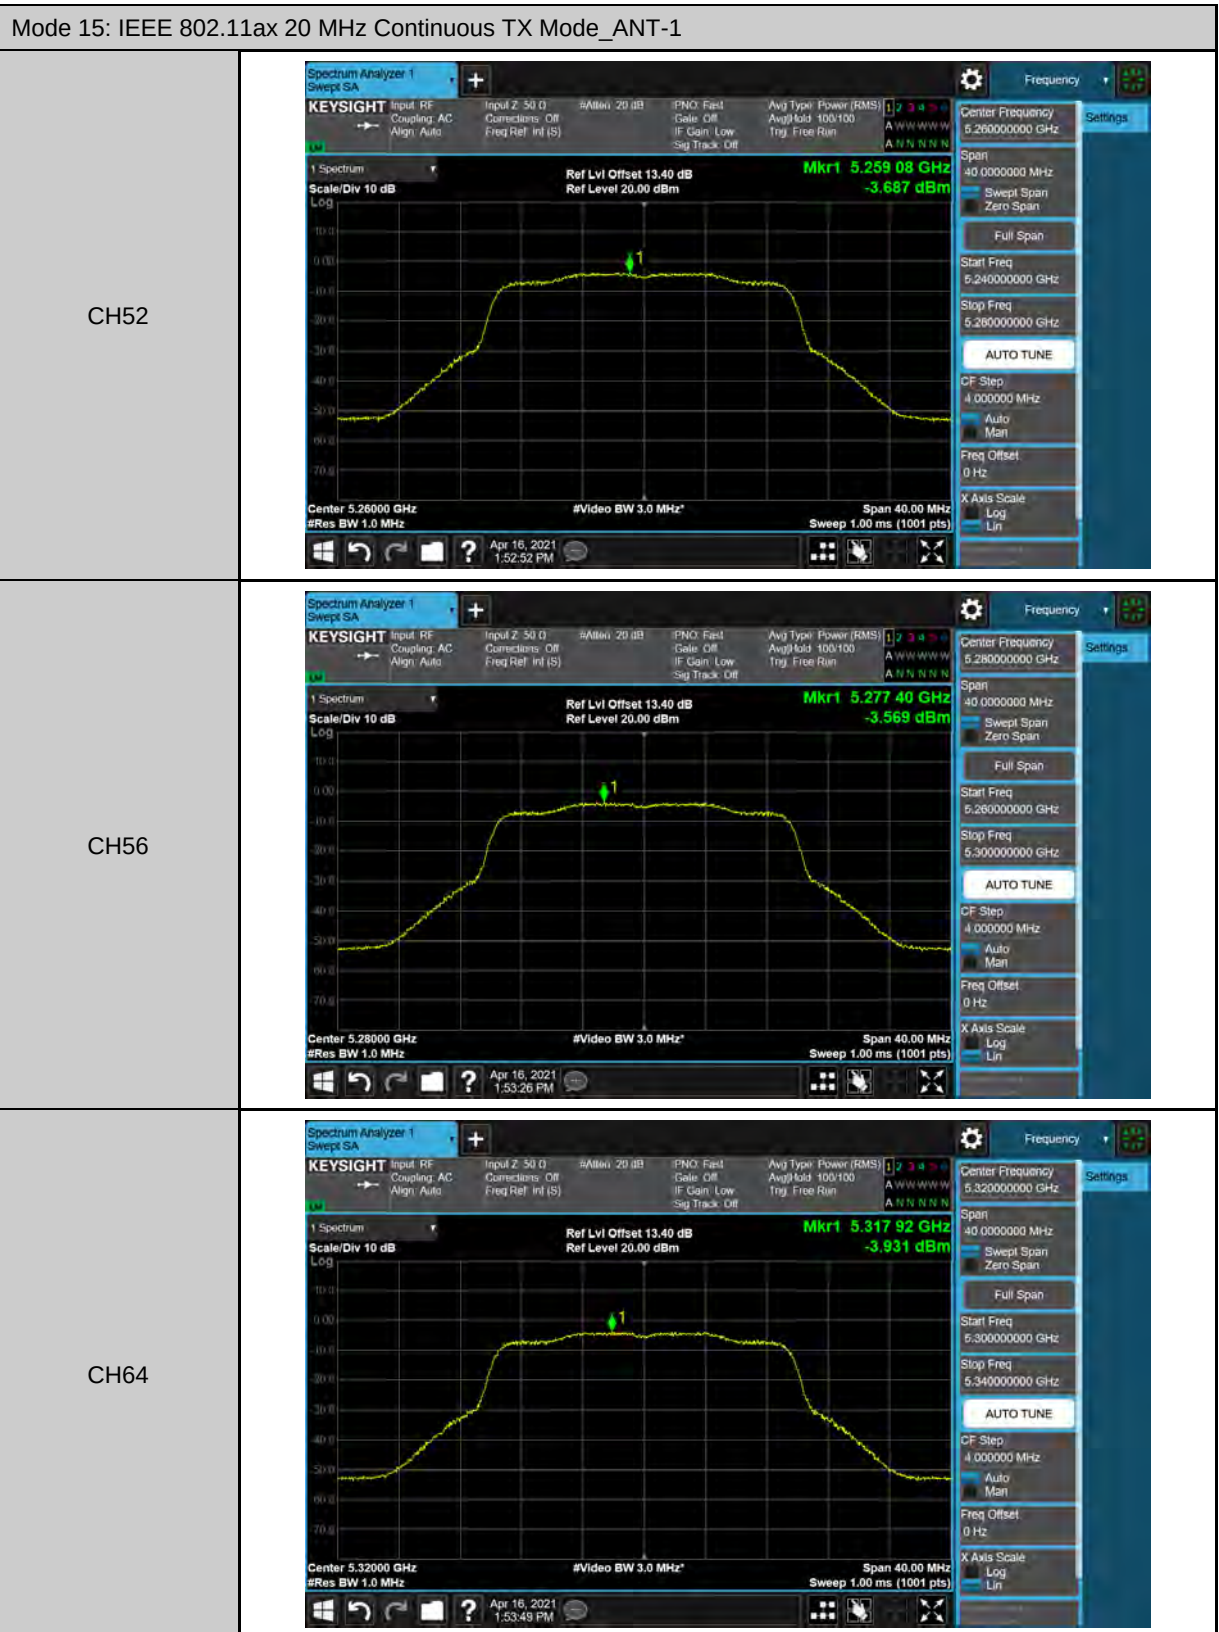




Mode 15: IEEE 802.11ax 20 MHz Continuous TX Mode_ANT-1

CH149



CH157

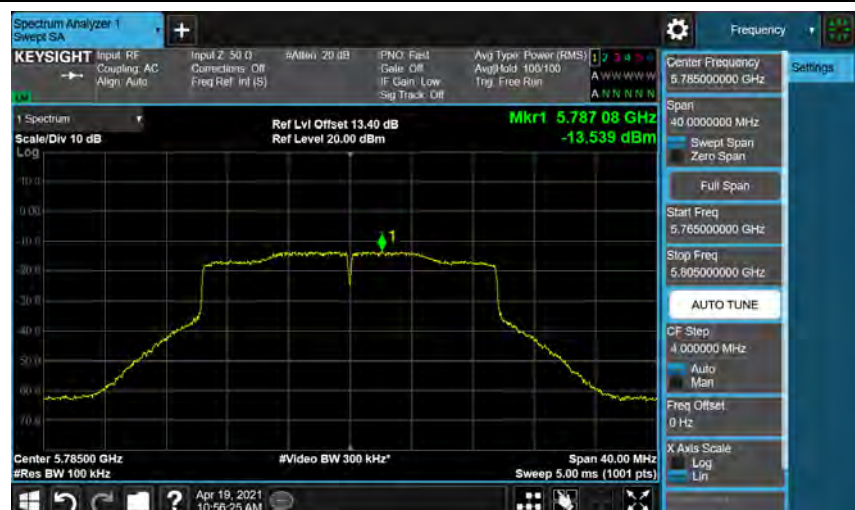

CH165



Mode 16: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-1

CH38



CH46





Mode 16: IEEE 802.11ax 40 MHz Continuous TX Mode_ANT-1

CH102



CH110



CH134












26 dB Bandwidth

操作模式	頻道 (CH)	頻率 (MHz)	26 dB 頻寬量測值 (MHz)	
			ANT-0	ANT-1
Mode 8	36	5180	24.000	---
	40	5200	23.570	---
	48	5240	23.340	---
	52	5260	23.680	---
	56	5280	23.340	---
	64	5320	23.140	---
	100	5500	23.610	---
	112	5560	23.530	---
Mode 9	140	5700	23.460	---
	52	5260	23.880	22.370
	56	5280	23.990	22.970
	64	5320	23.840	22.470
	100	5500	23.790	23.670
	112	5560	23.760	22.660
Mode 10	140	5700	23.040	23.300
	54	5270	43.330	43.250
	62	5310	43.420	42.590
	102	5510	43.190	43.260
	110	5550	43.260	41.760
Mode 11	134	5670	43.500	42.570
	52	5260	23.320	23.170
	56	5280	23.980	22.710
	64	5320	24.180	23.760
	100	5500	23.350	23.030
	112	5560	23.610	23.820
	140	5700	23.260	22.460

操作模式	頻道 (CH)	頻率 (MHz)	26 dB 頻寬量測值 (MHz)	
			ANT-0	ANT-1
Mode 12	54	5270	44.080	42.740
	62	5310	43.340	42.250
	102	5510	43.180	42.230
	110	5550	42.660	42.660
	134	5670	42.370	42.520
Mode 13	58	5290	85.450	83.540
	106	5530	83.730	84.190
Mode 14	50	5250	81.310	81.240
Mode 15	36	5180	22.820	22.870
	40	5200	23.220	21.790
	48	5240	22.600	22.800
	52	5260	22.400	22.940
	56	5280	22.710	22.490
	64	5320	22.540	22.280
	100	5500	23.230	23.830
	112	5560	22.970	22.070
	140	5700	22.020	22.860
Mode 16	38	5190	42.430	41.780
	46	5230	41.840	42.700
	54	5270	43.040	41.720
	62	5310	43.060	43.220
	102	5510	43.670	43.770
	110	5550	43.310	41.660
	134	5670	43.030	42.280
Mode 17	42	5210	83.660	81.710
	58	5290	82.370	83.660
	106	5530	81.880	81.540
Mode 18	50	5250	81.320	81.660
	50	5250	81.490	80.730

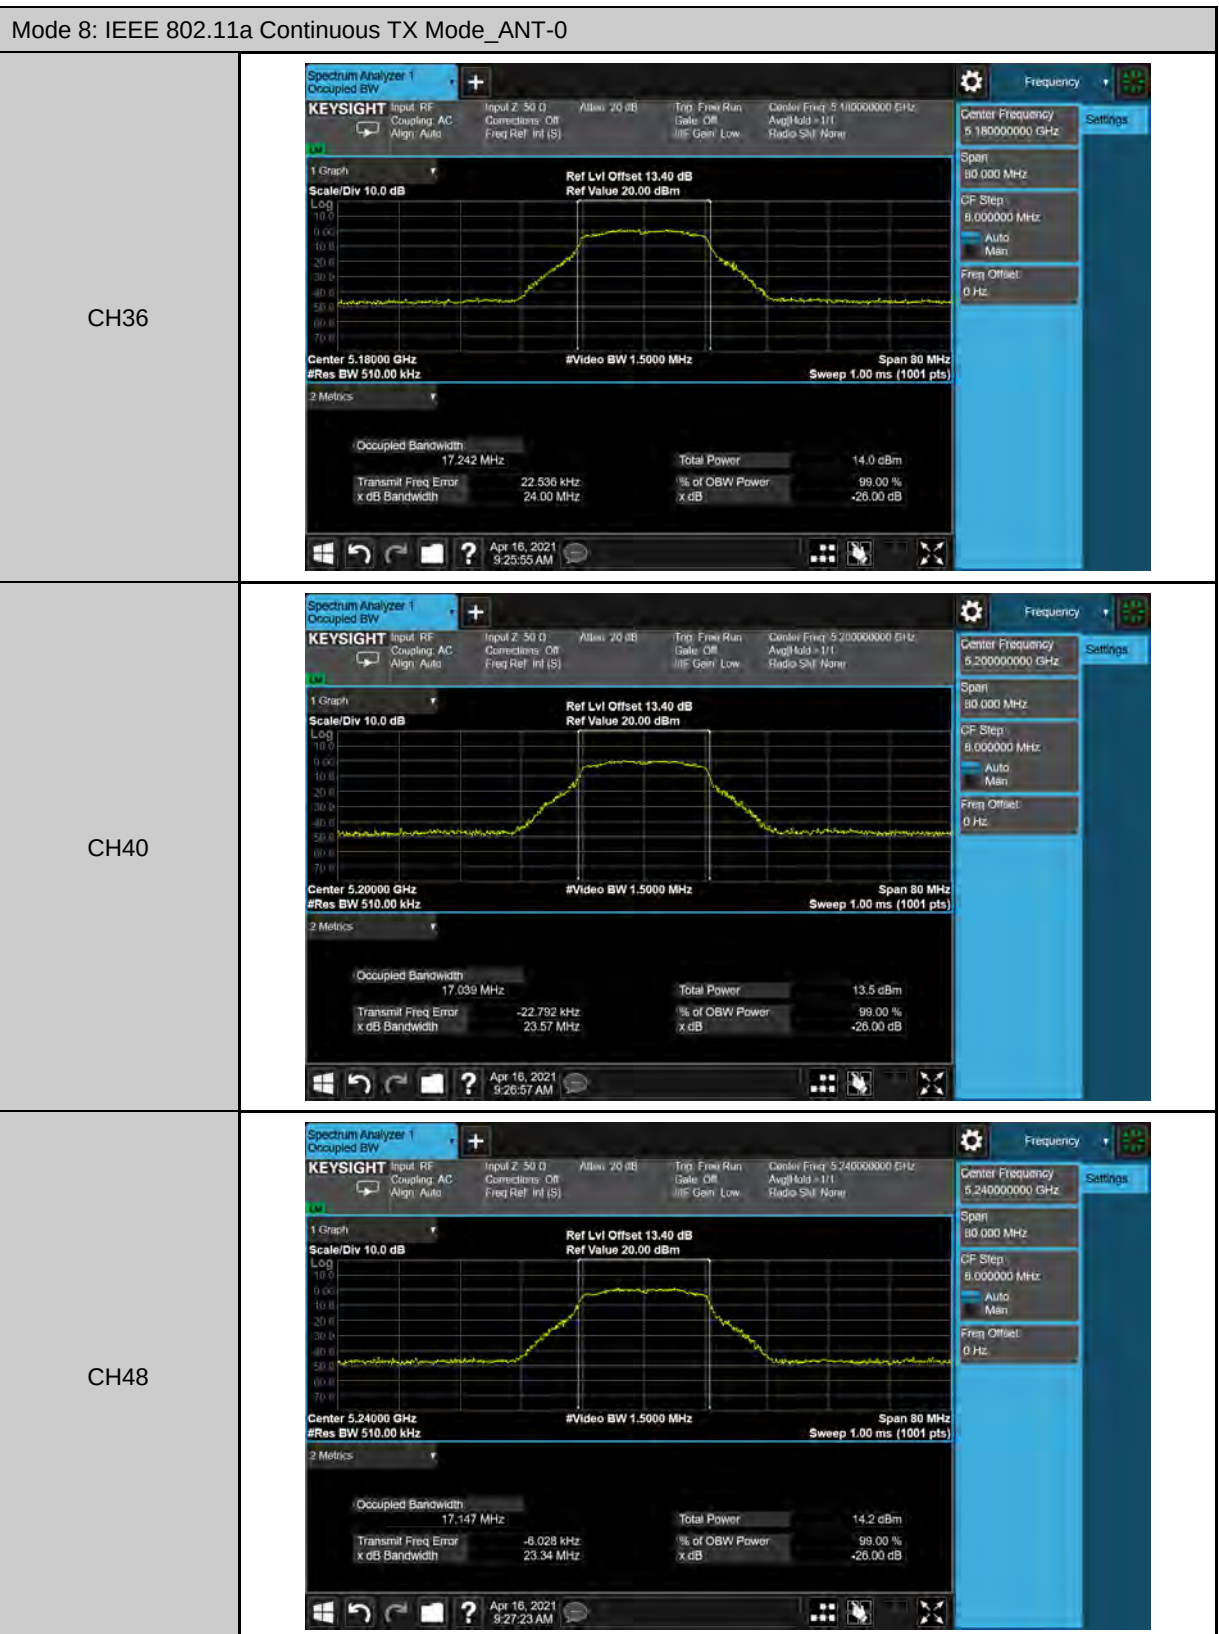


Mode 8: IEEE 802.11a Continuous TX Mode_ANT-0

CH52




CH56

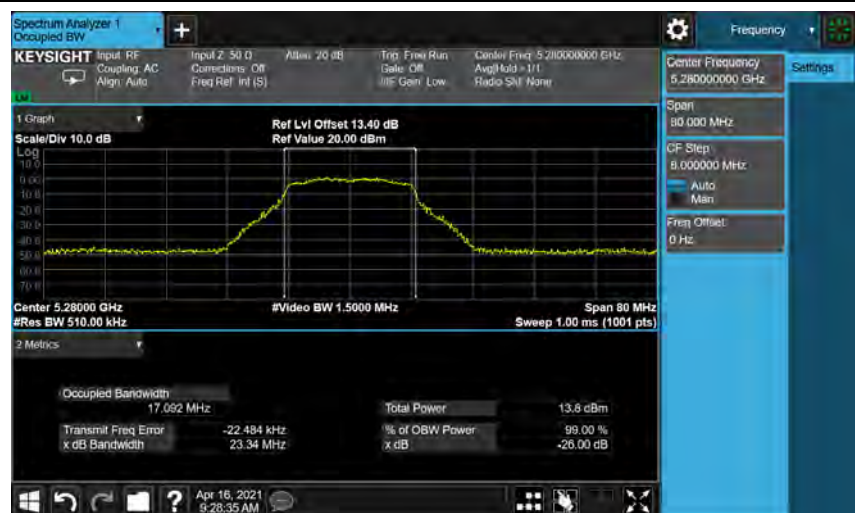

CH64





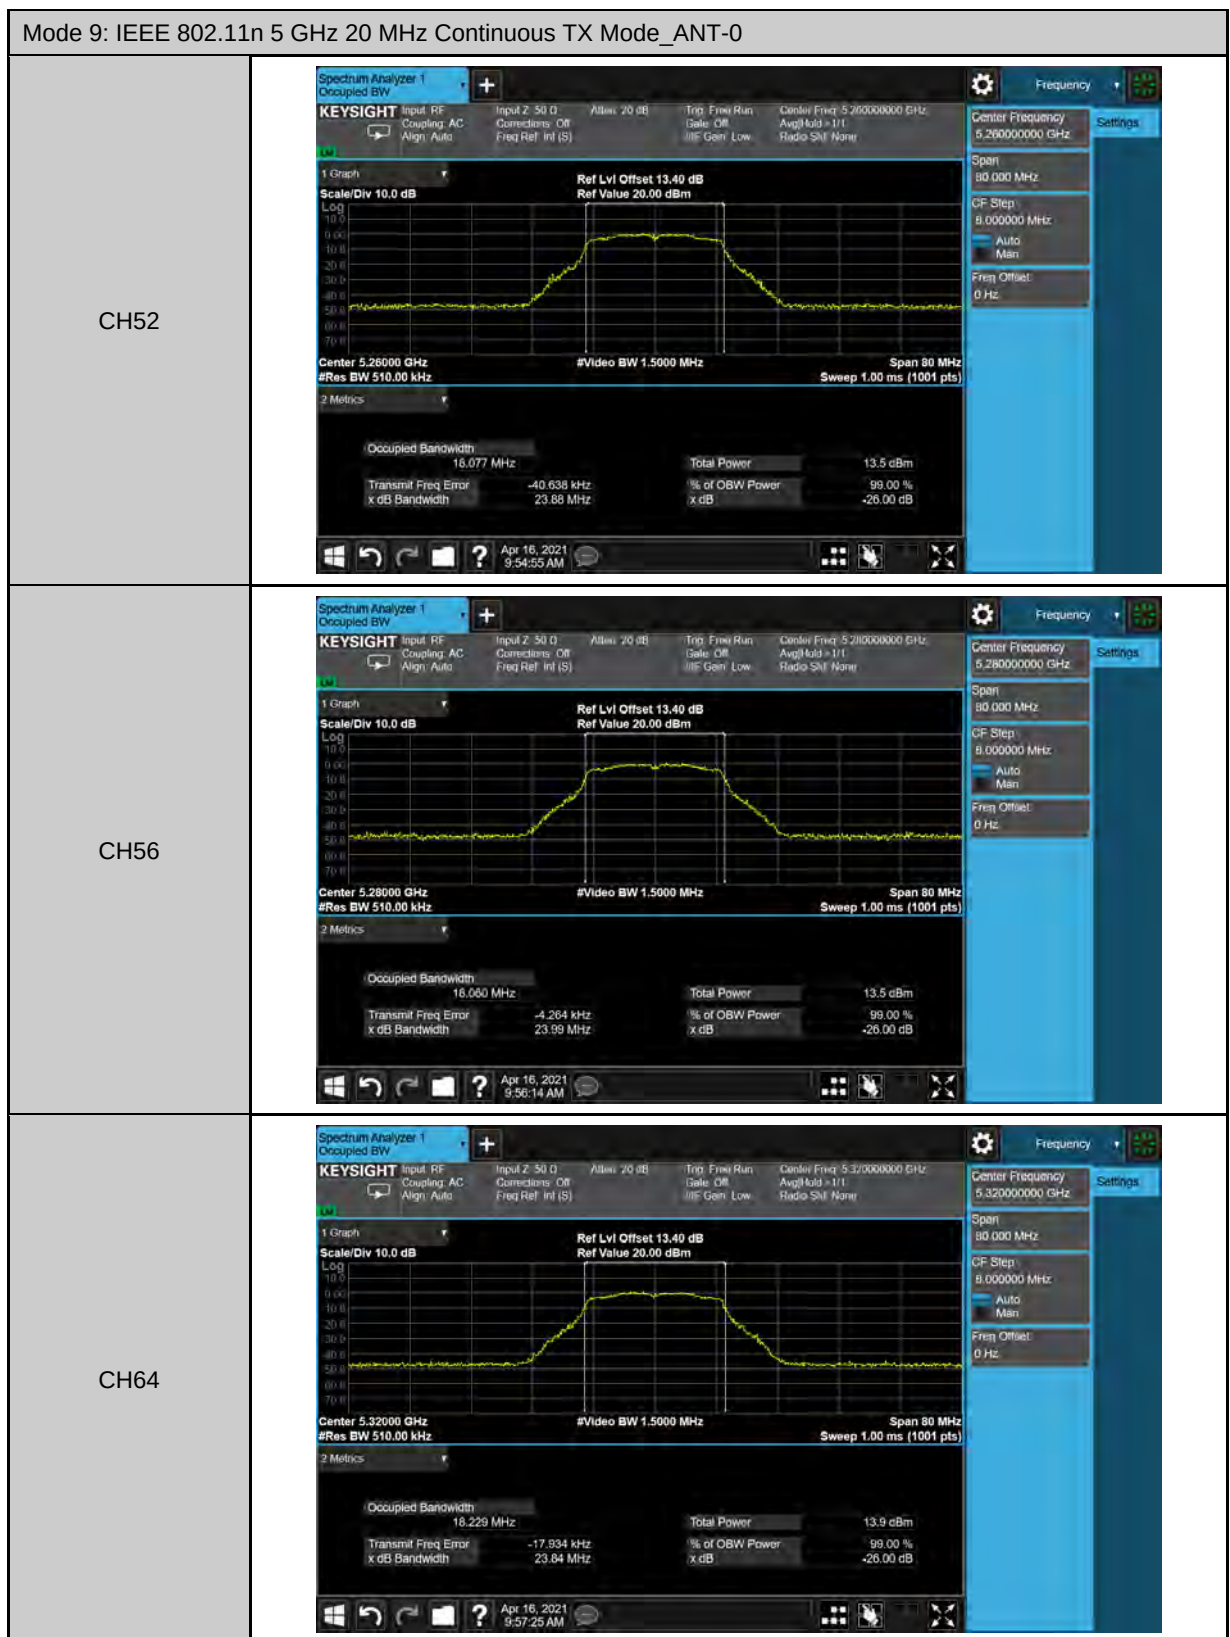


Mode 9: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-0


CH100





CH112

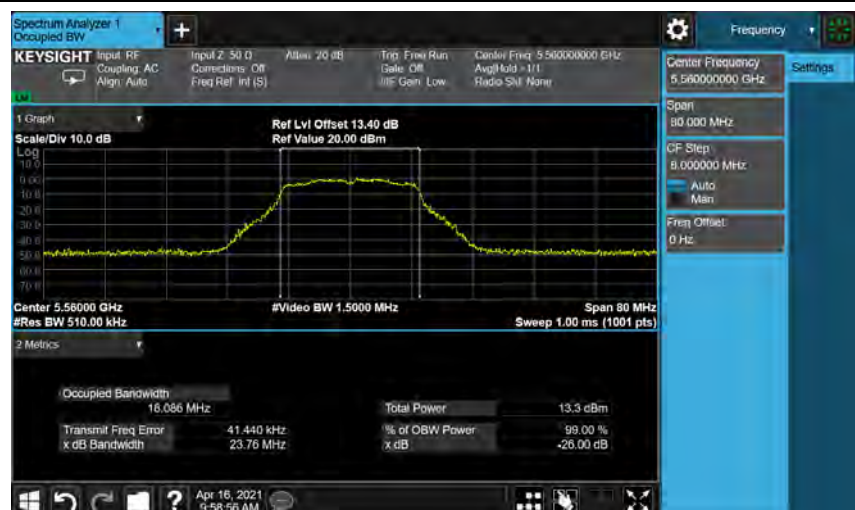



CH140

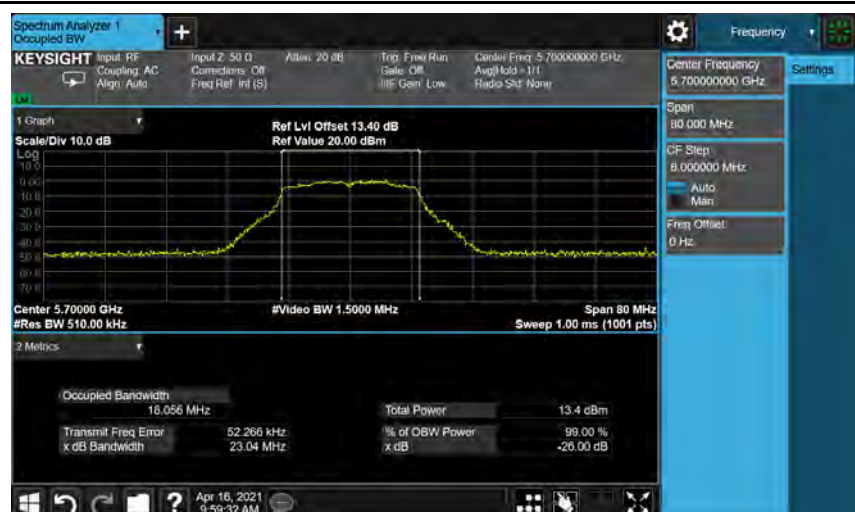


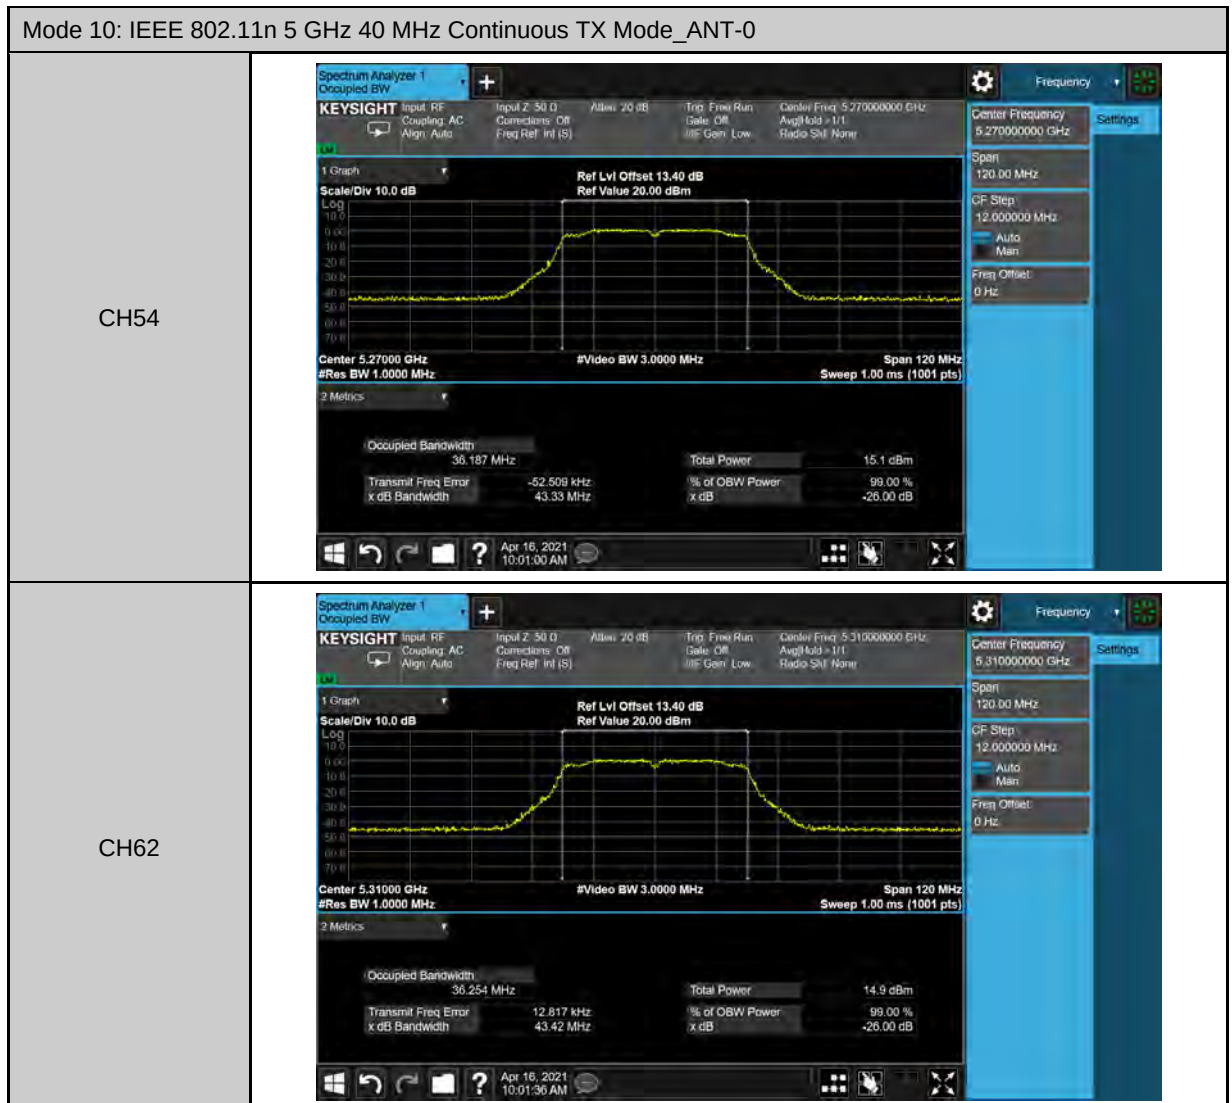


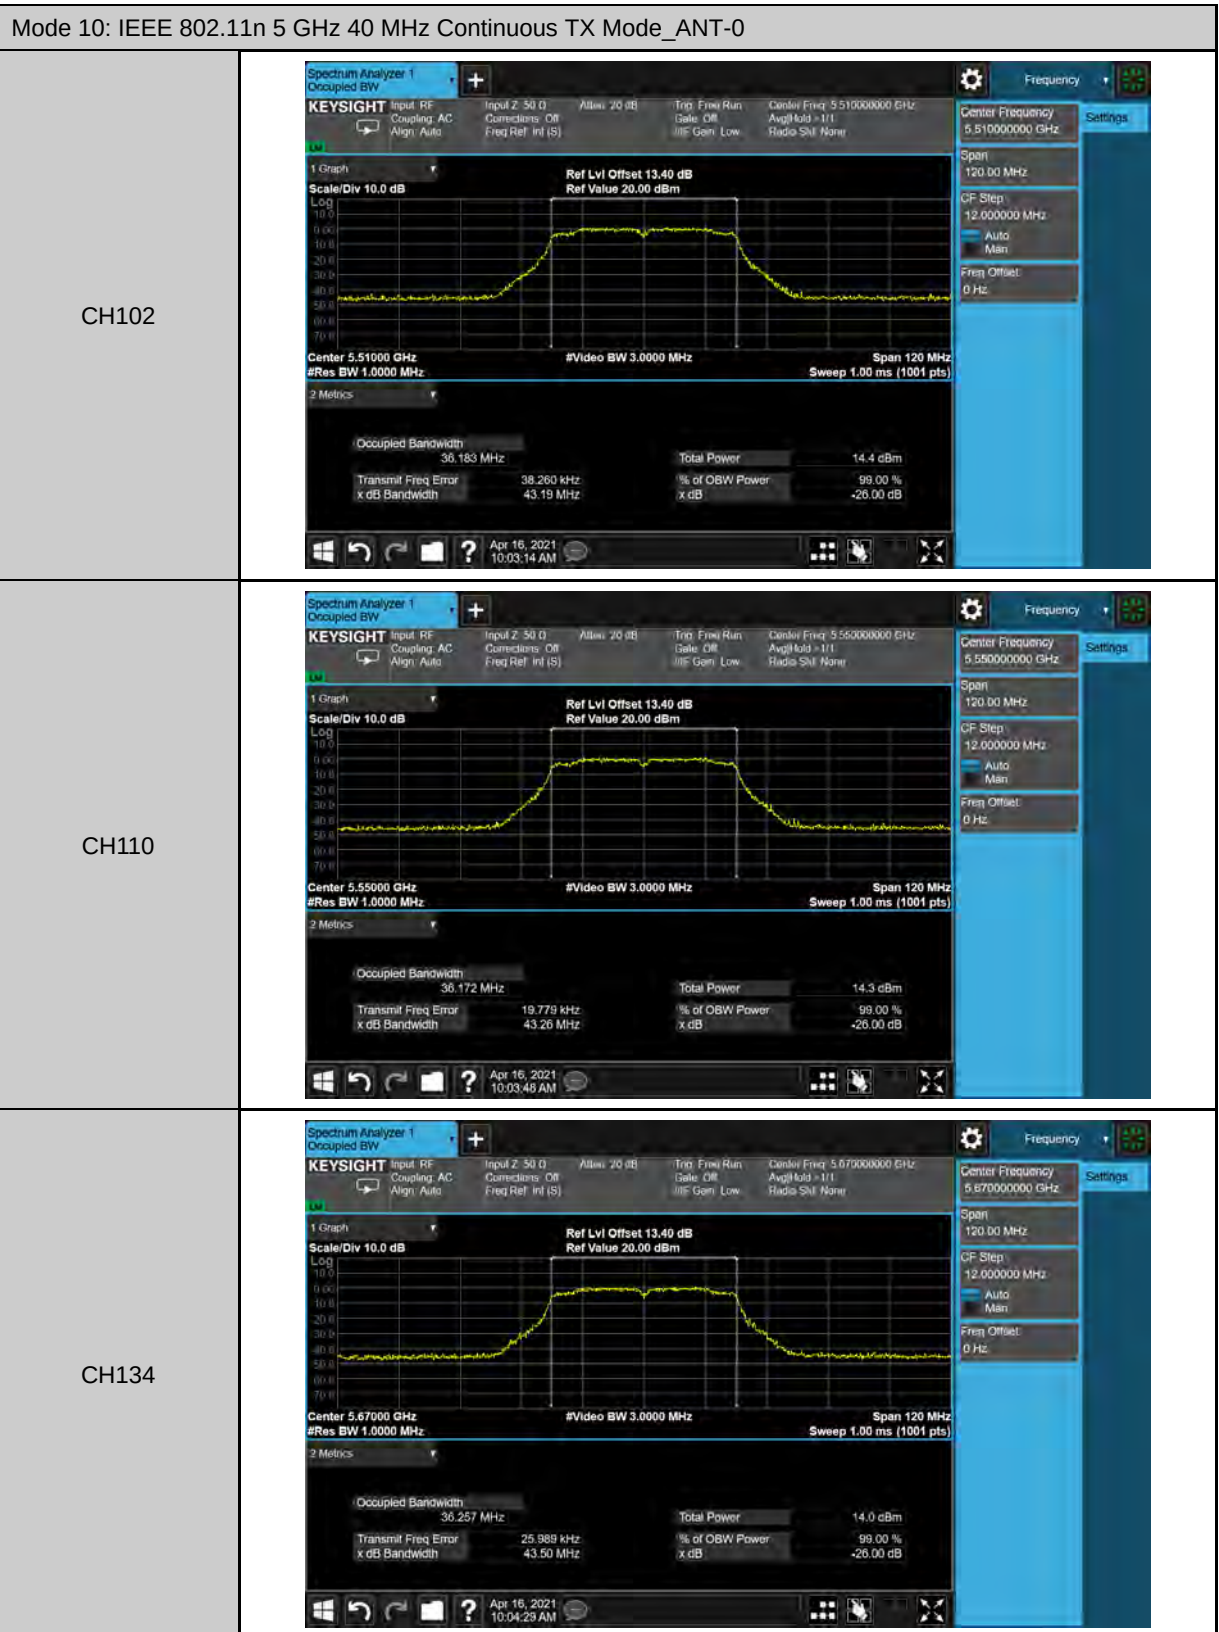


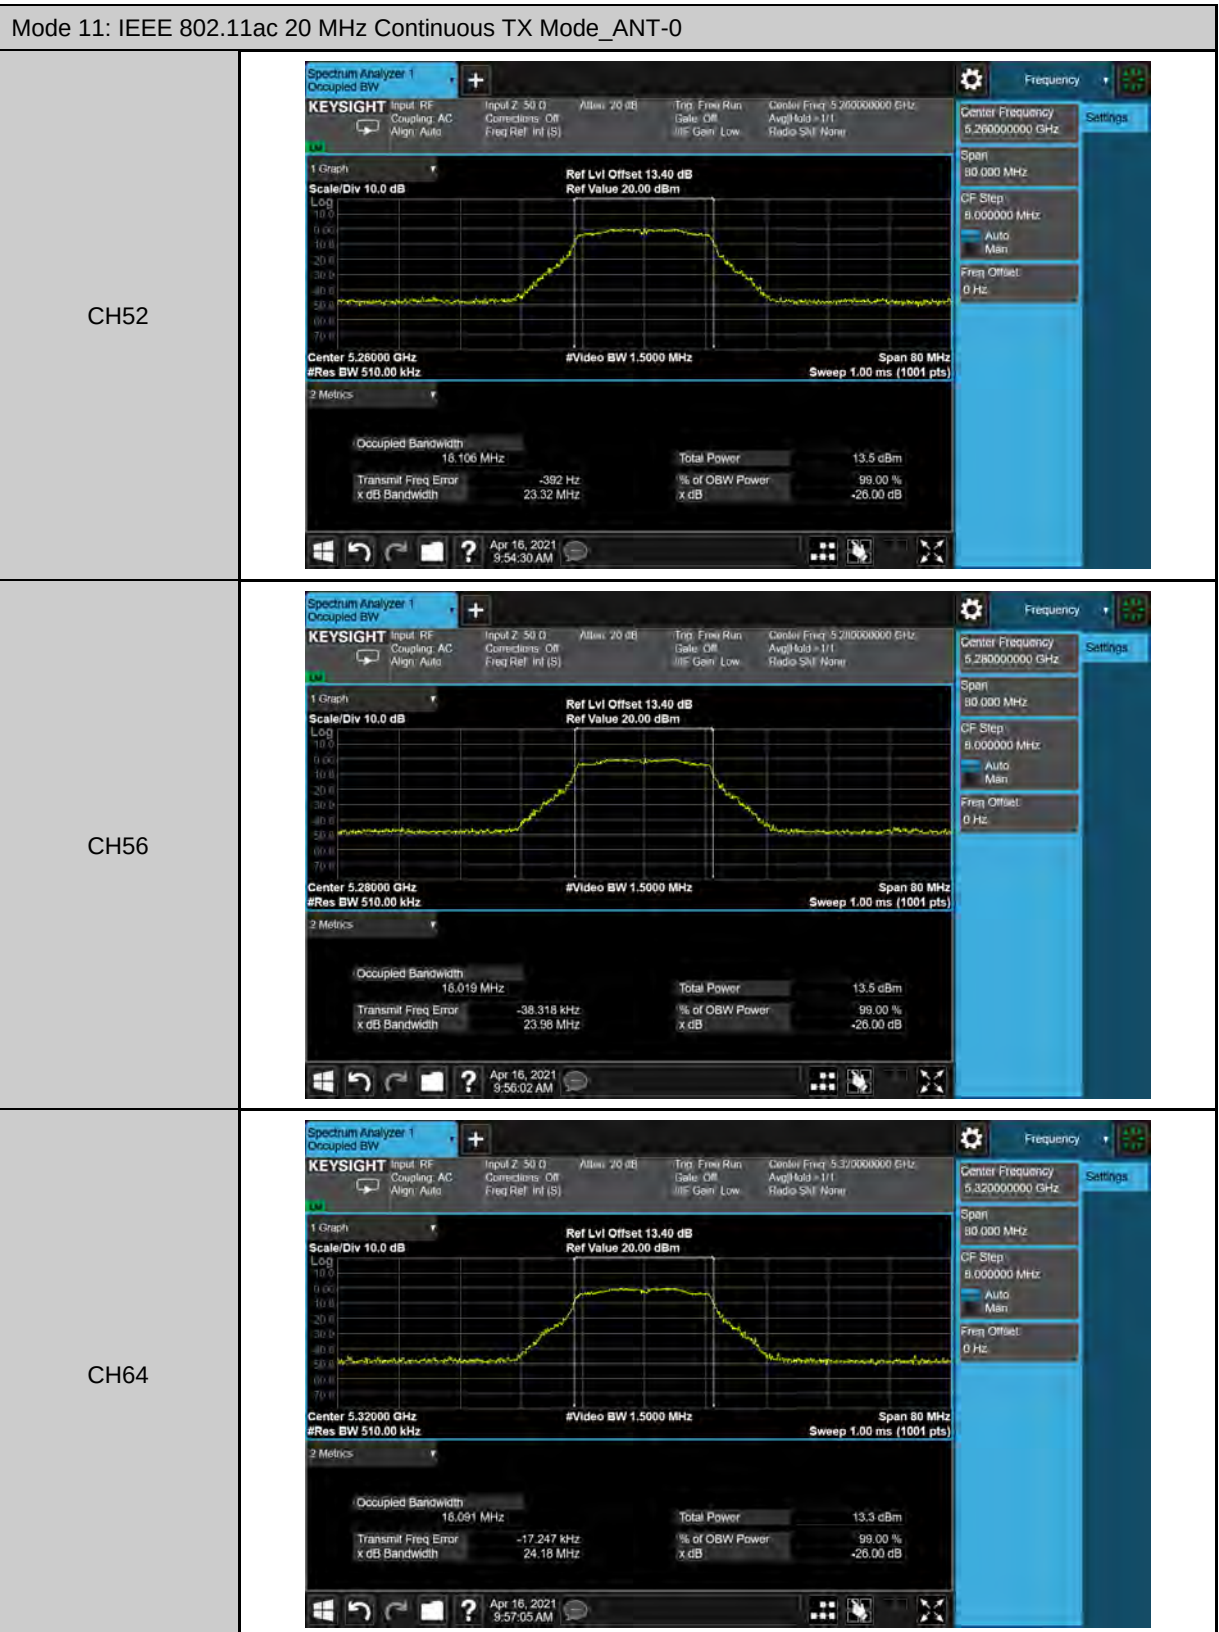


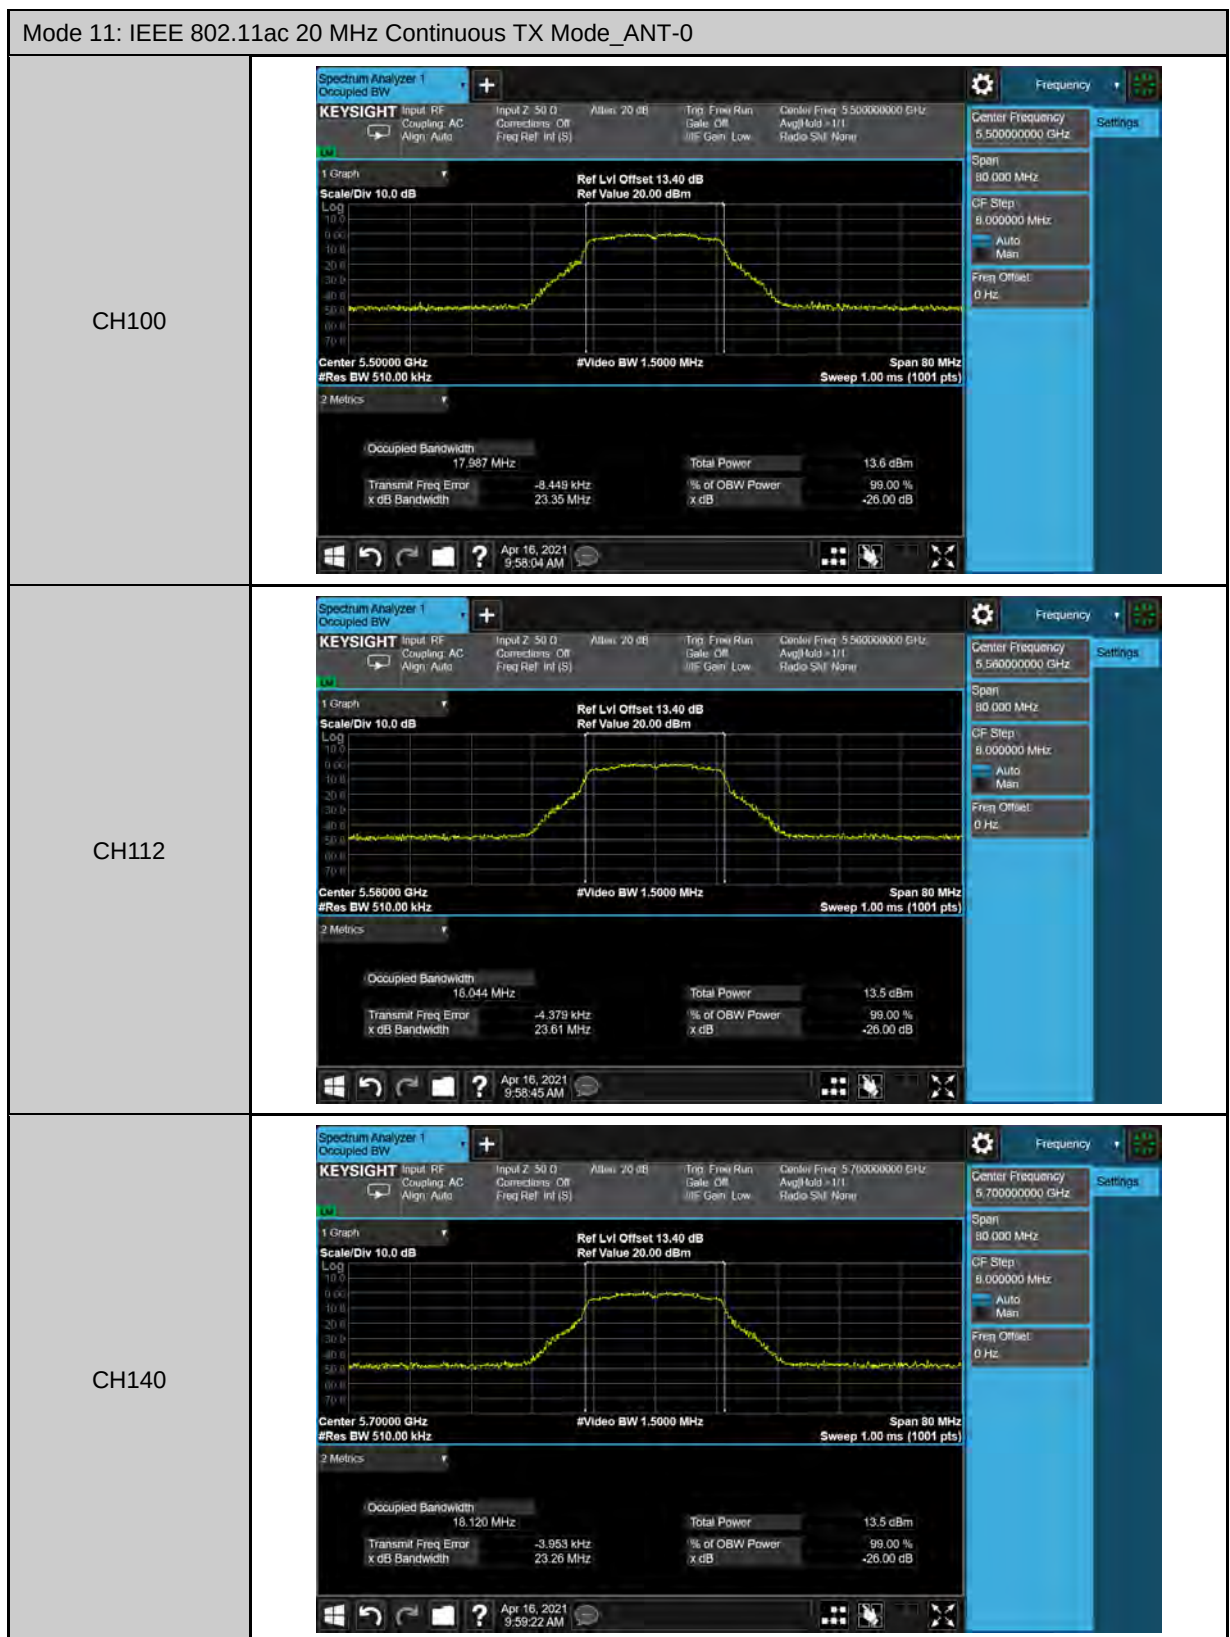


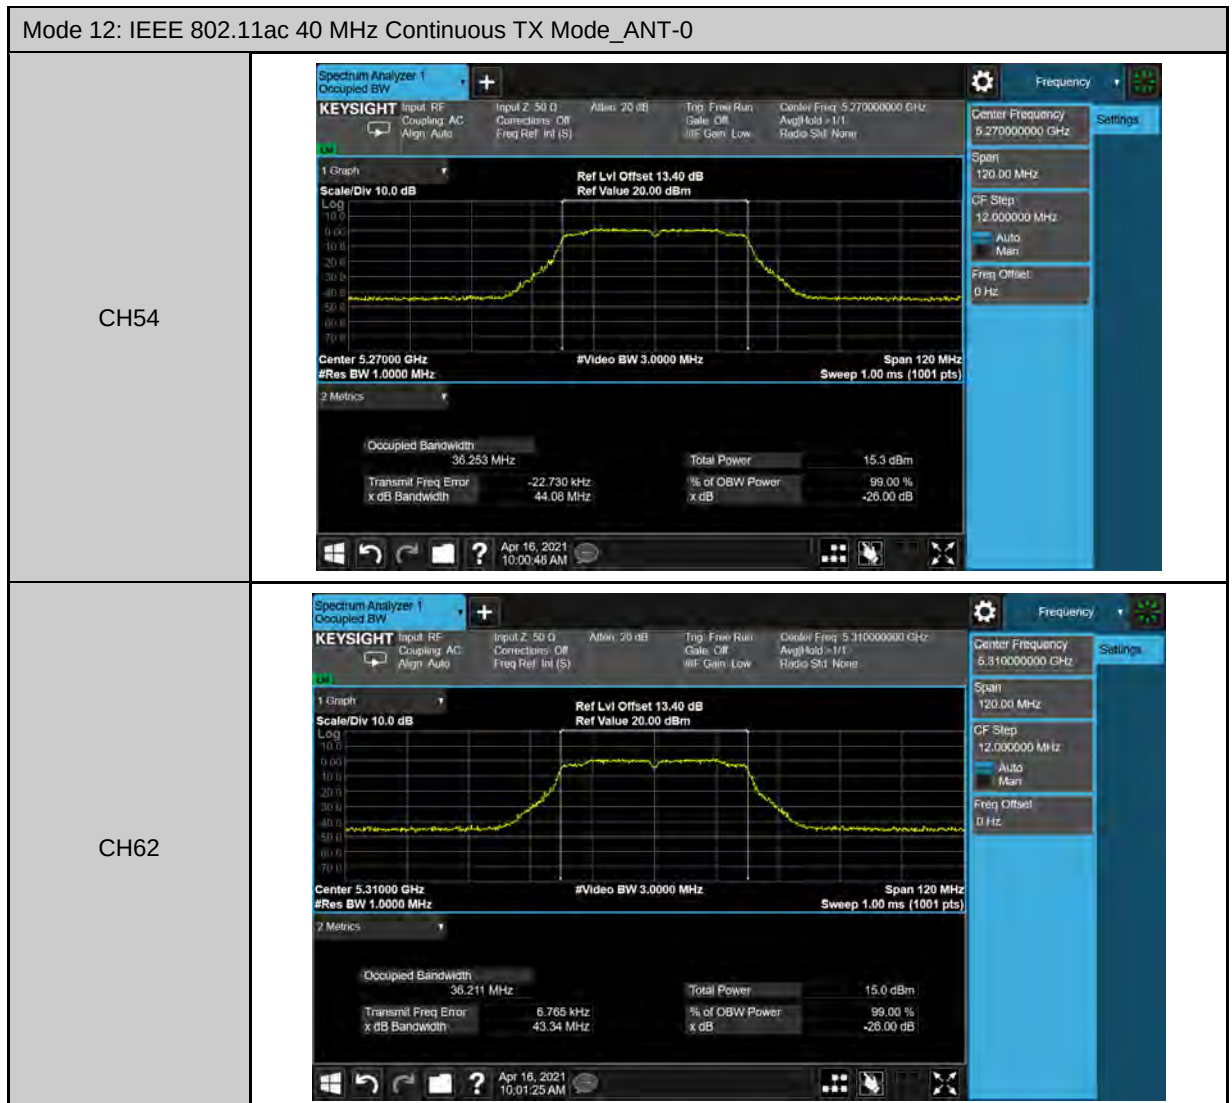


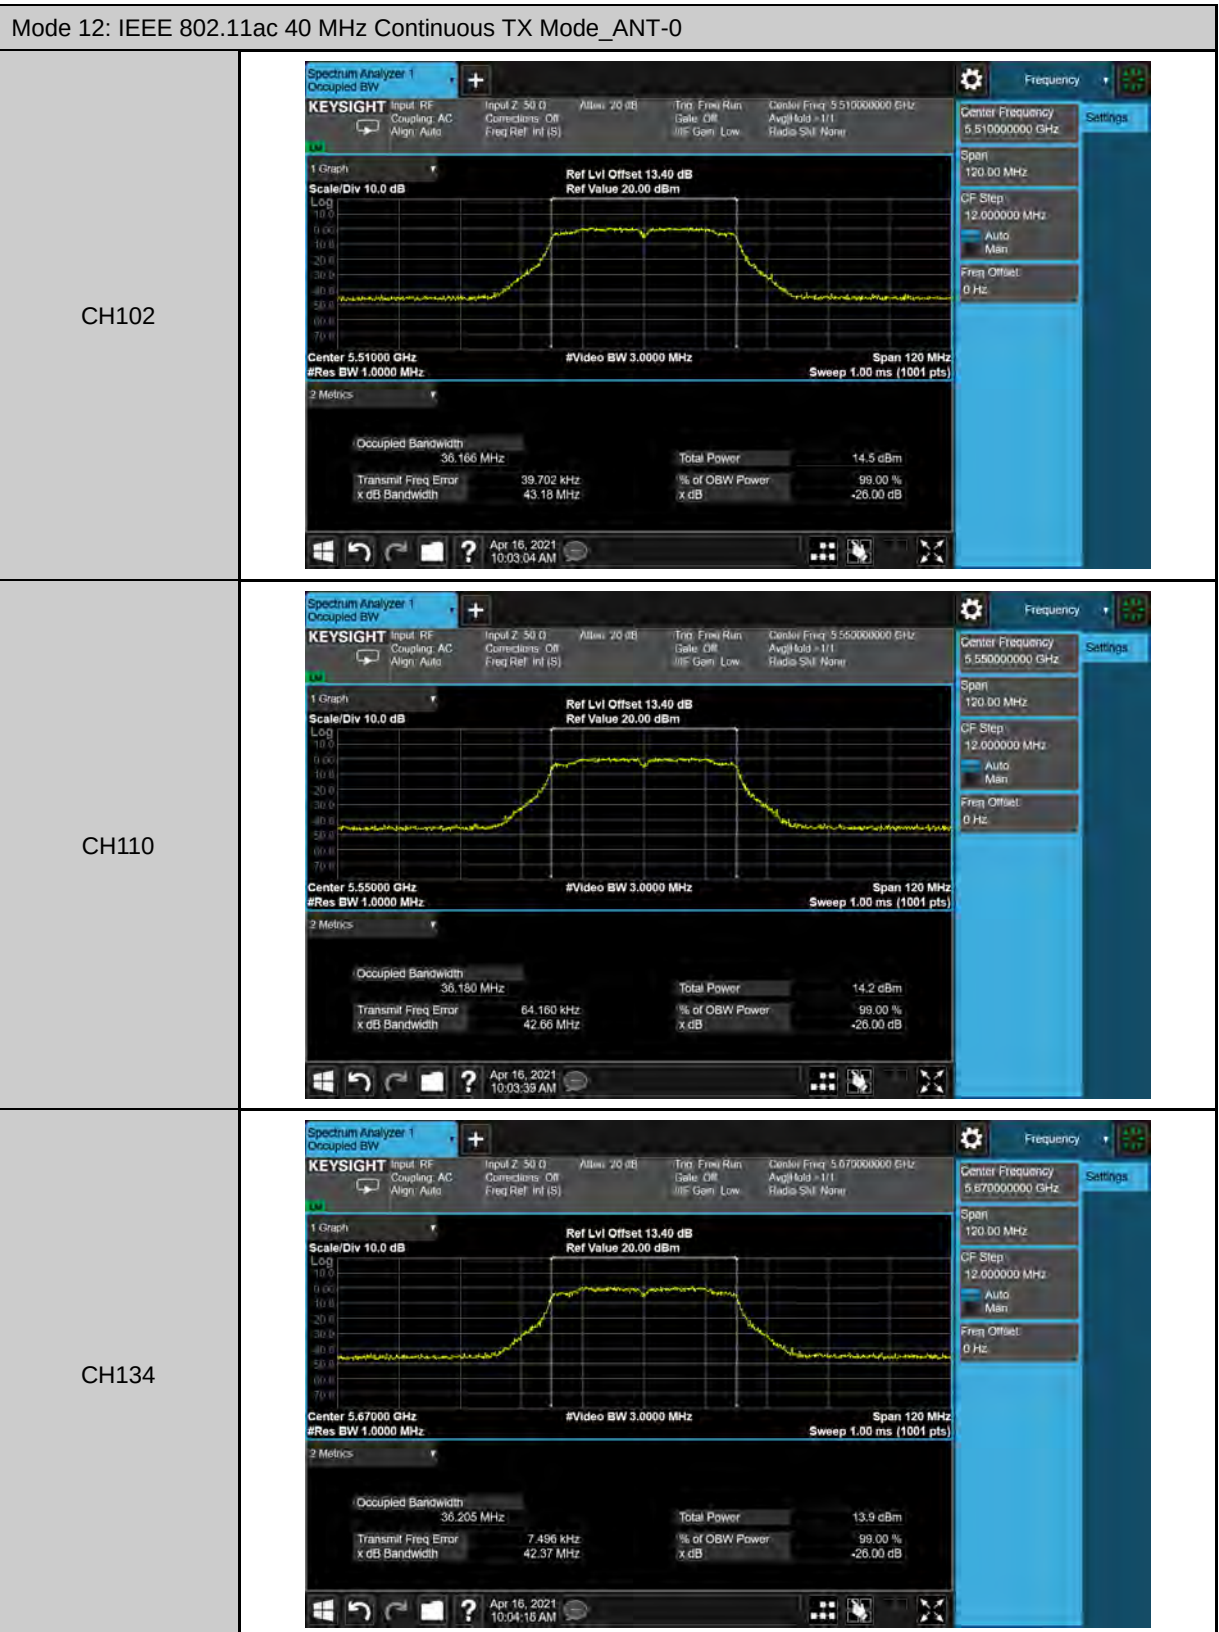

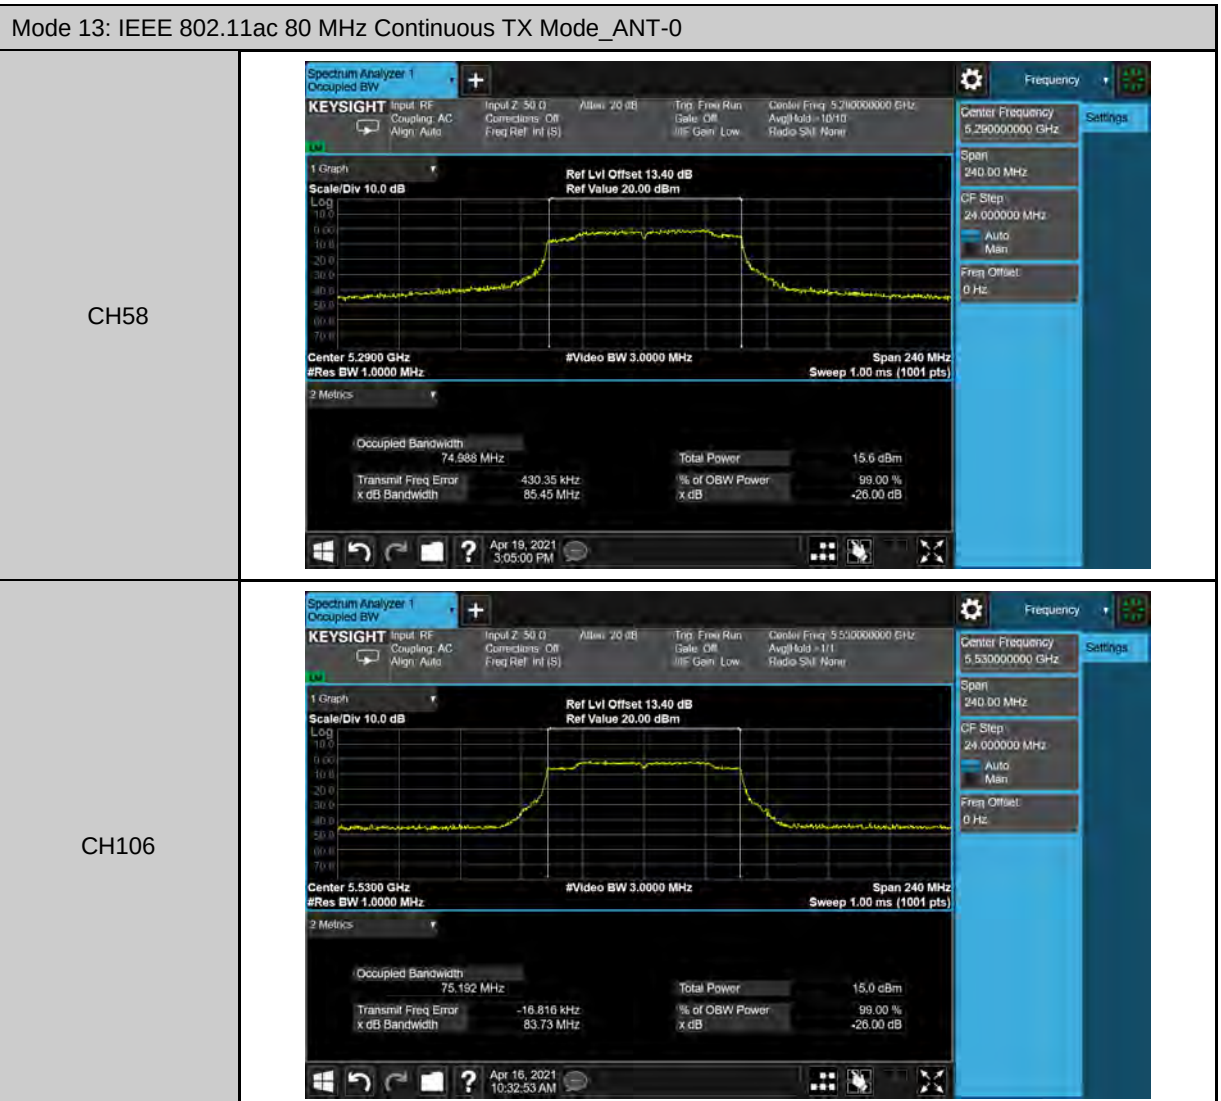


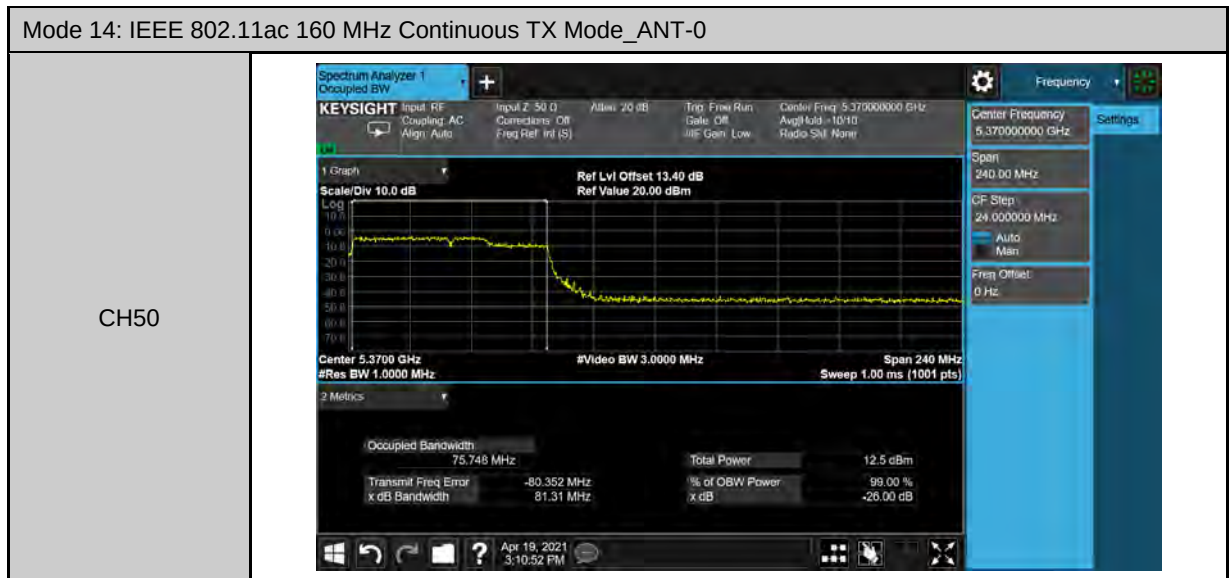


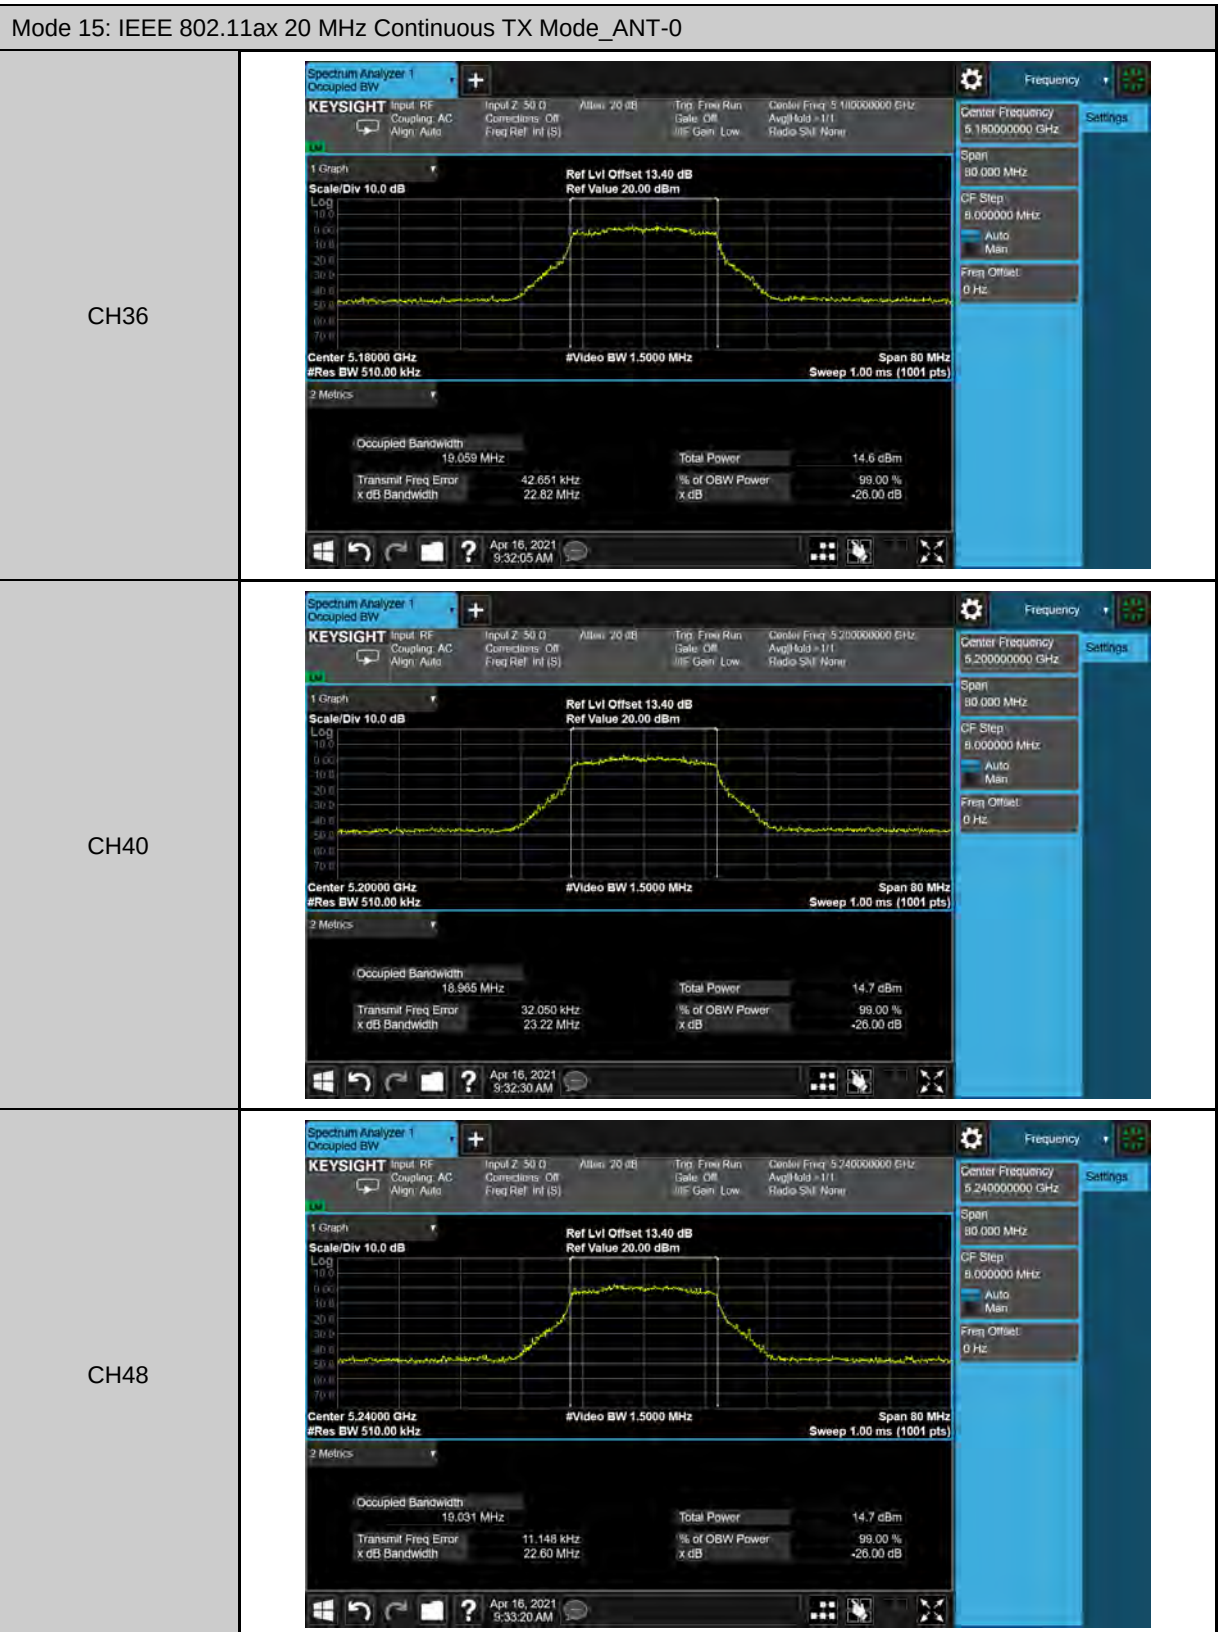


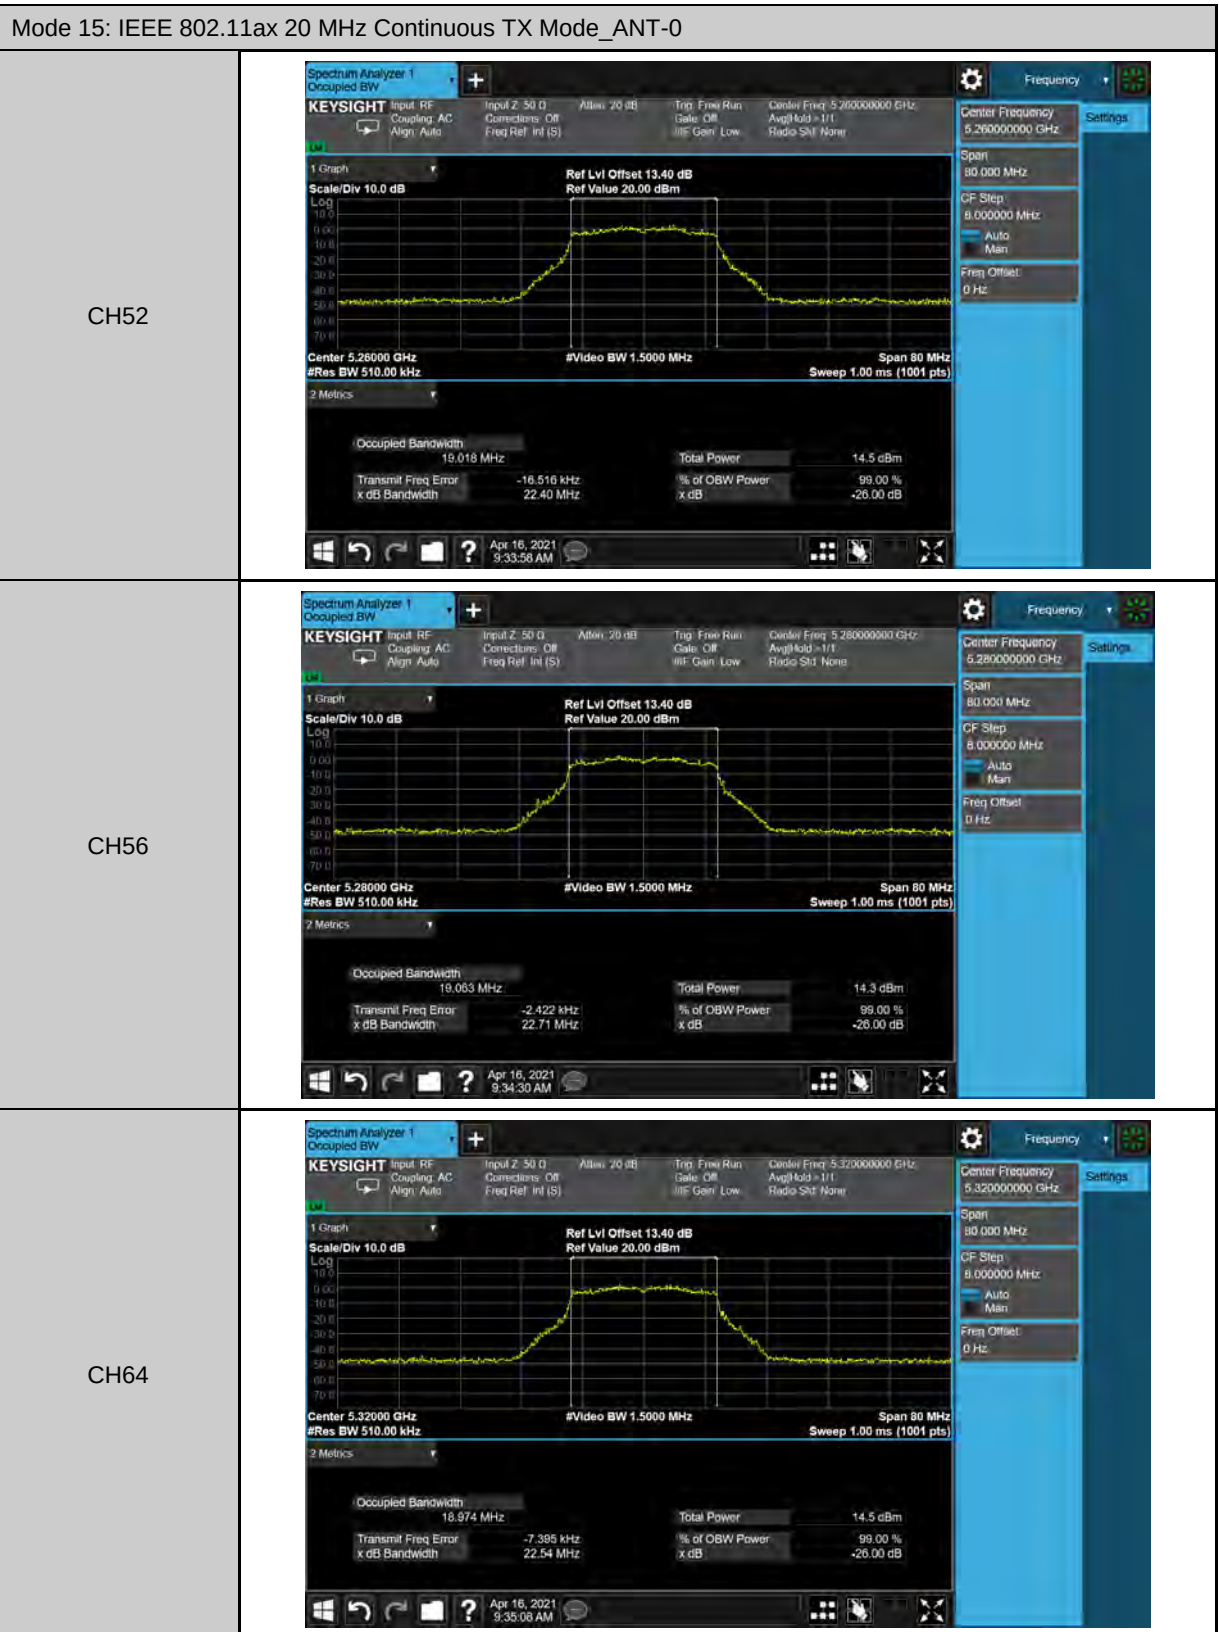



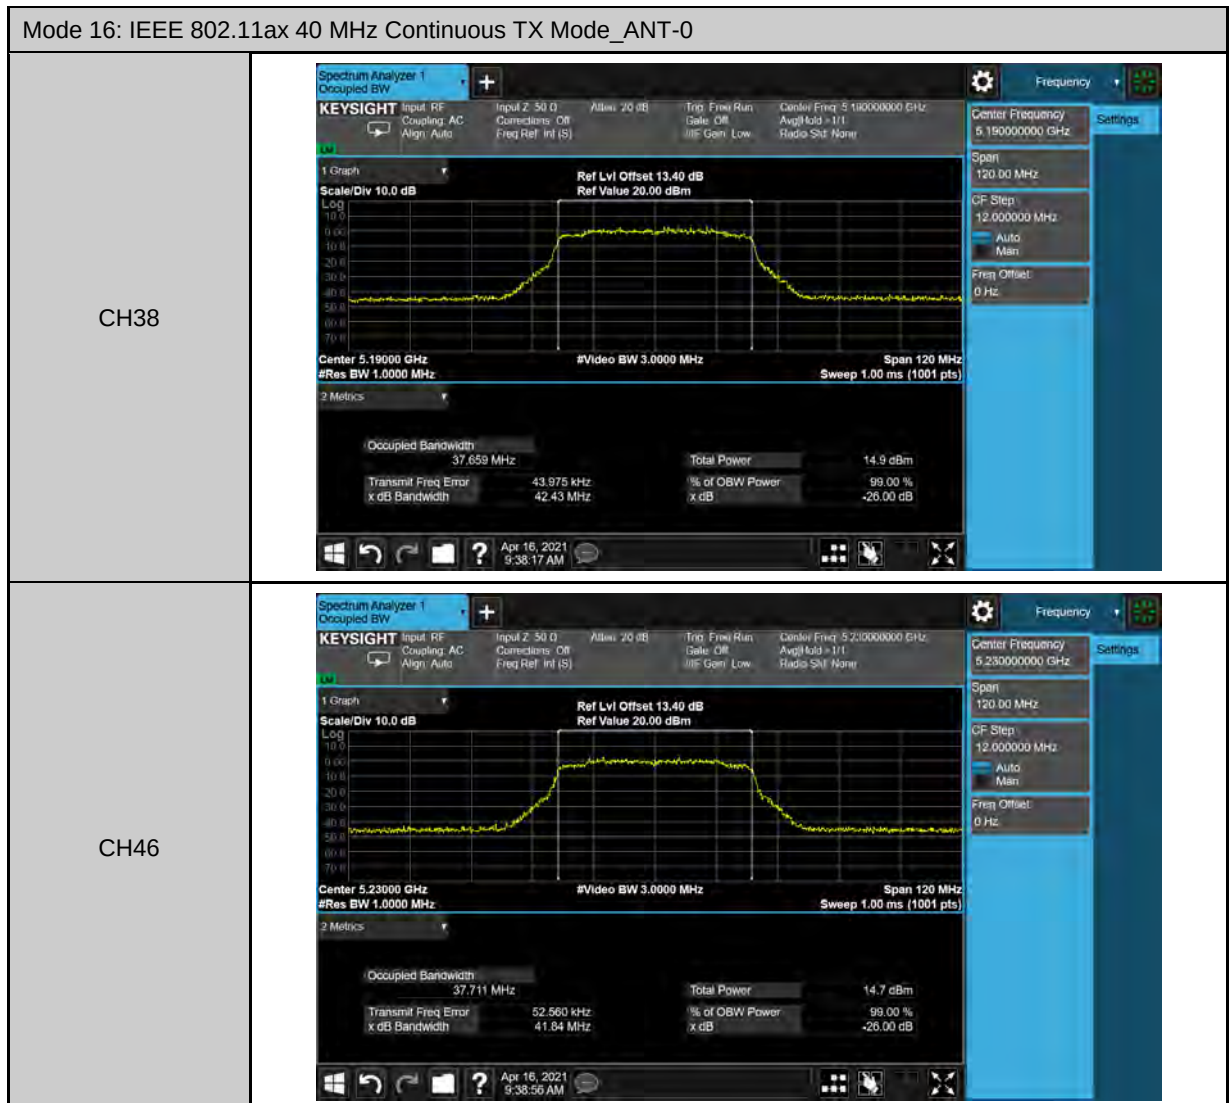


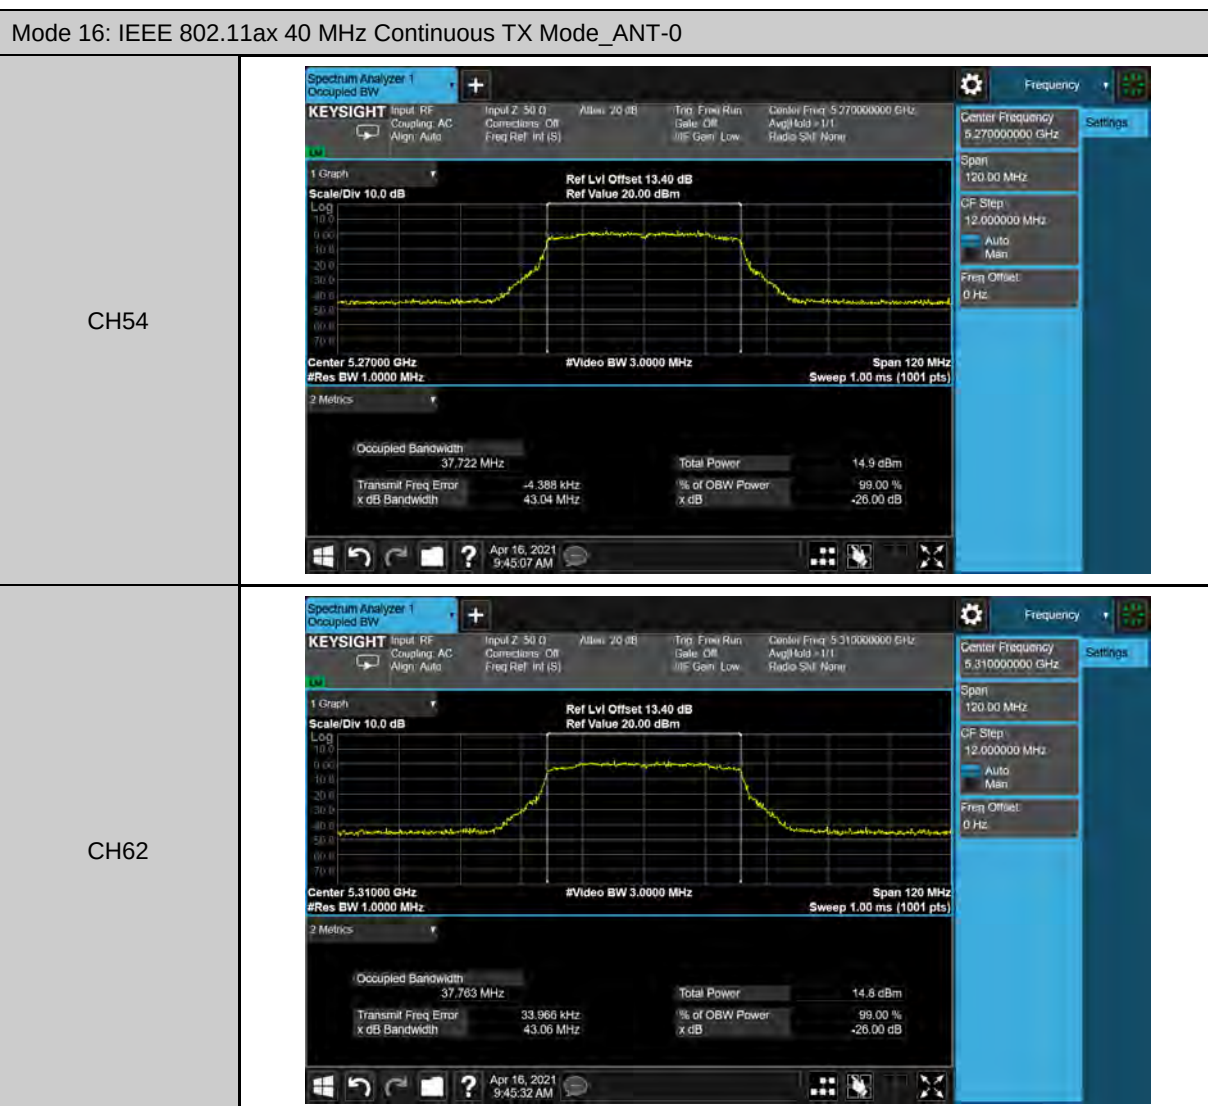

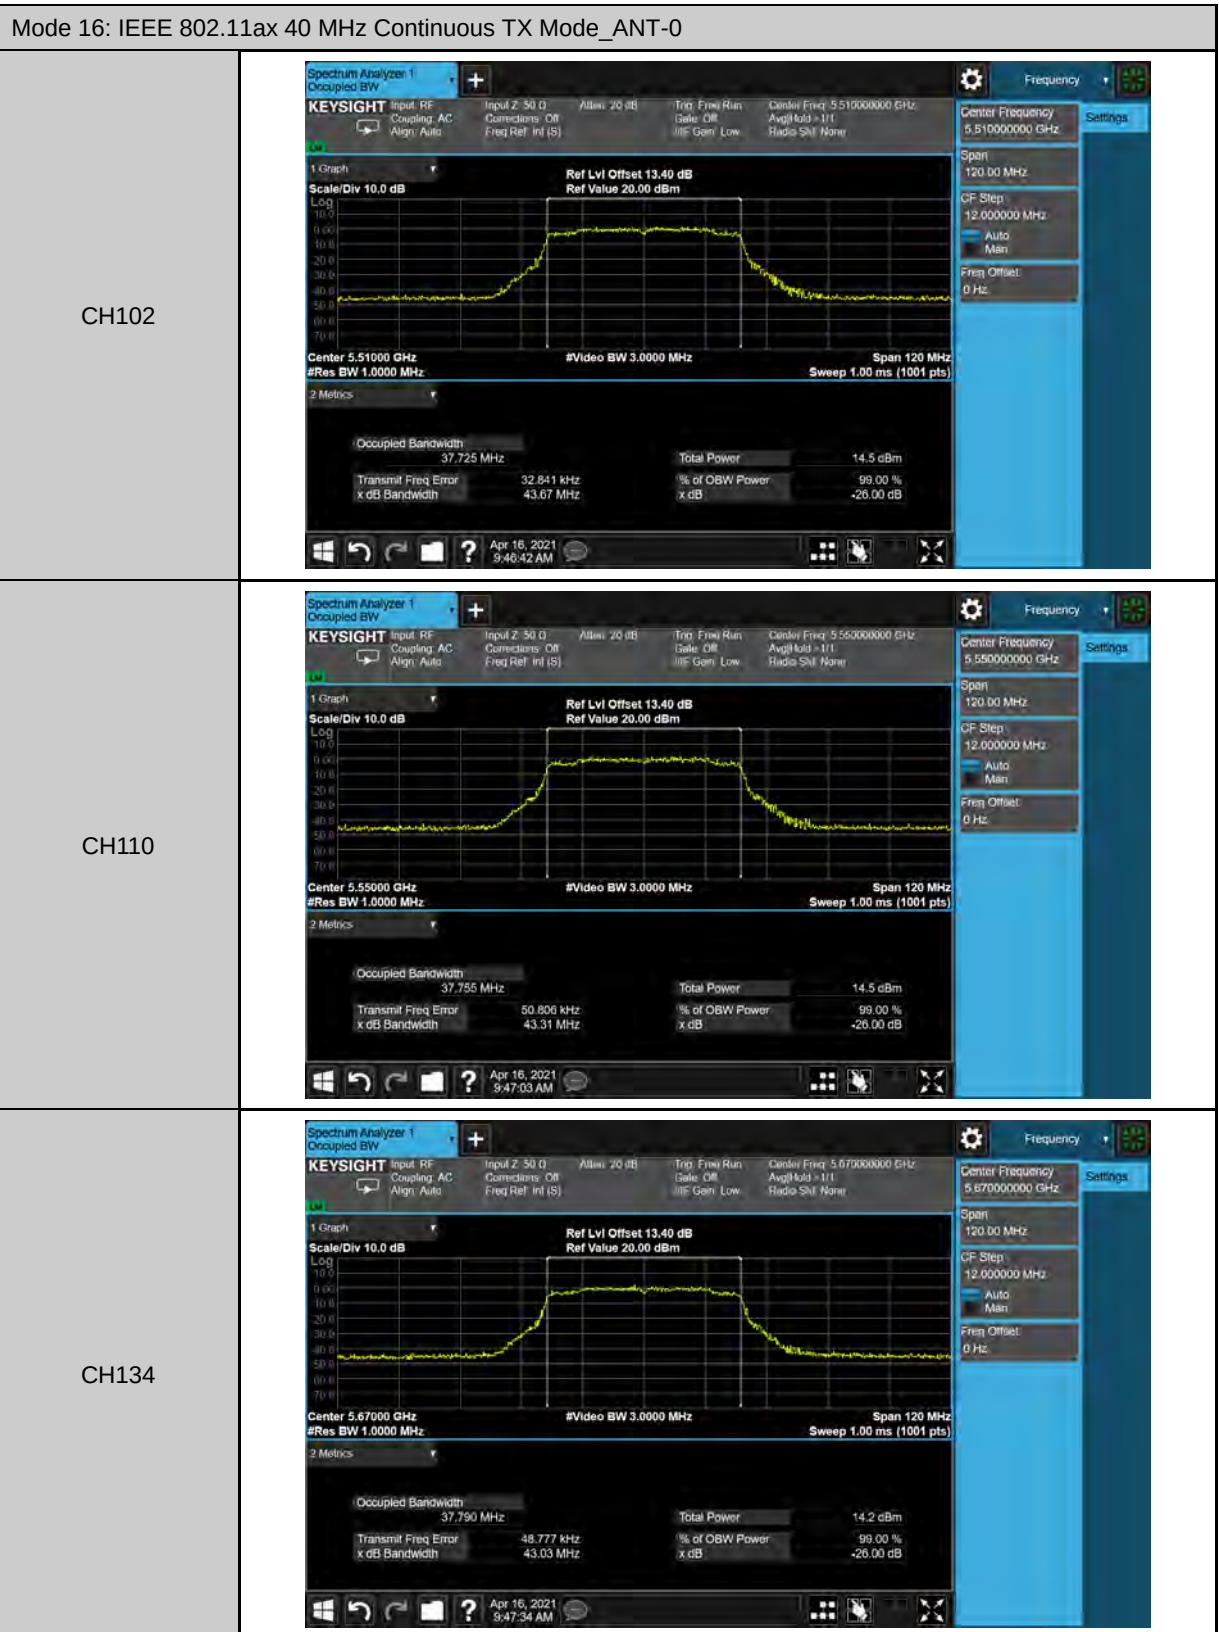





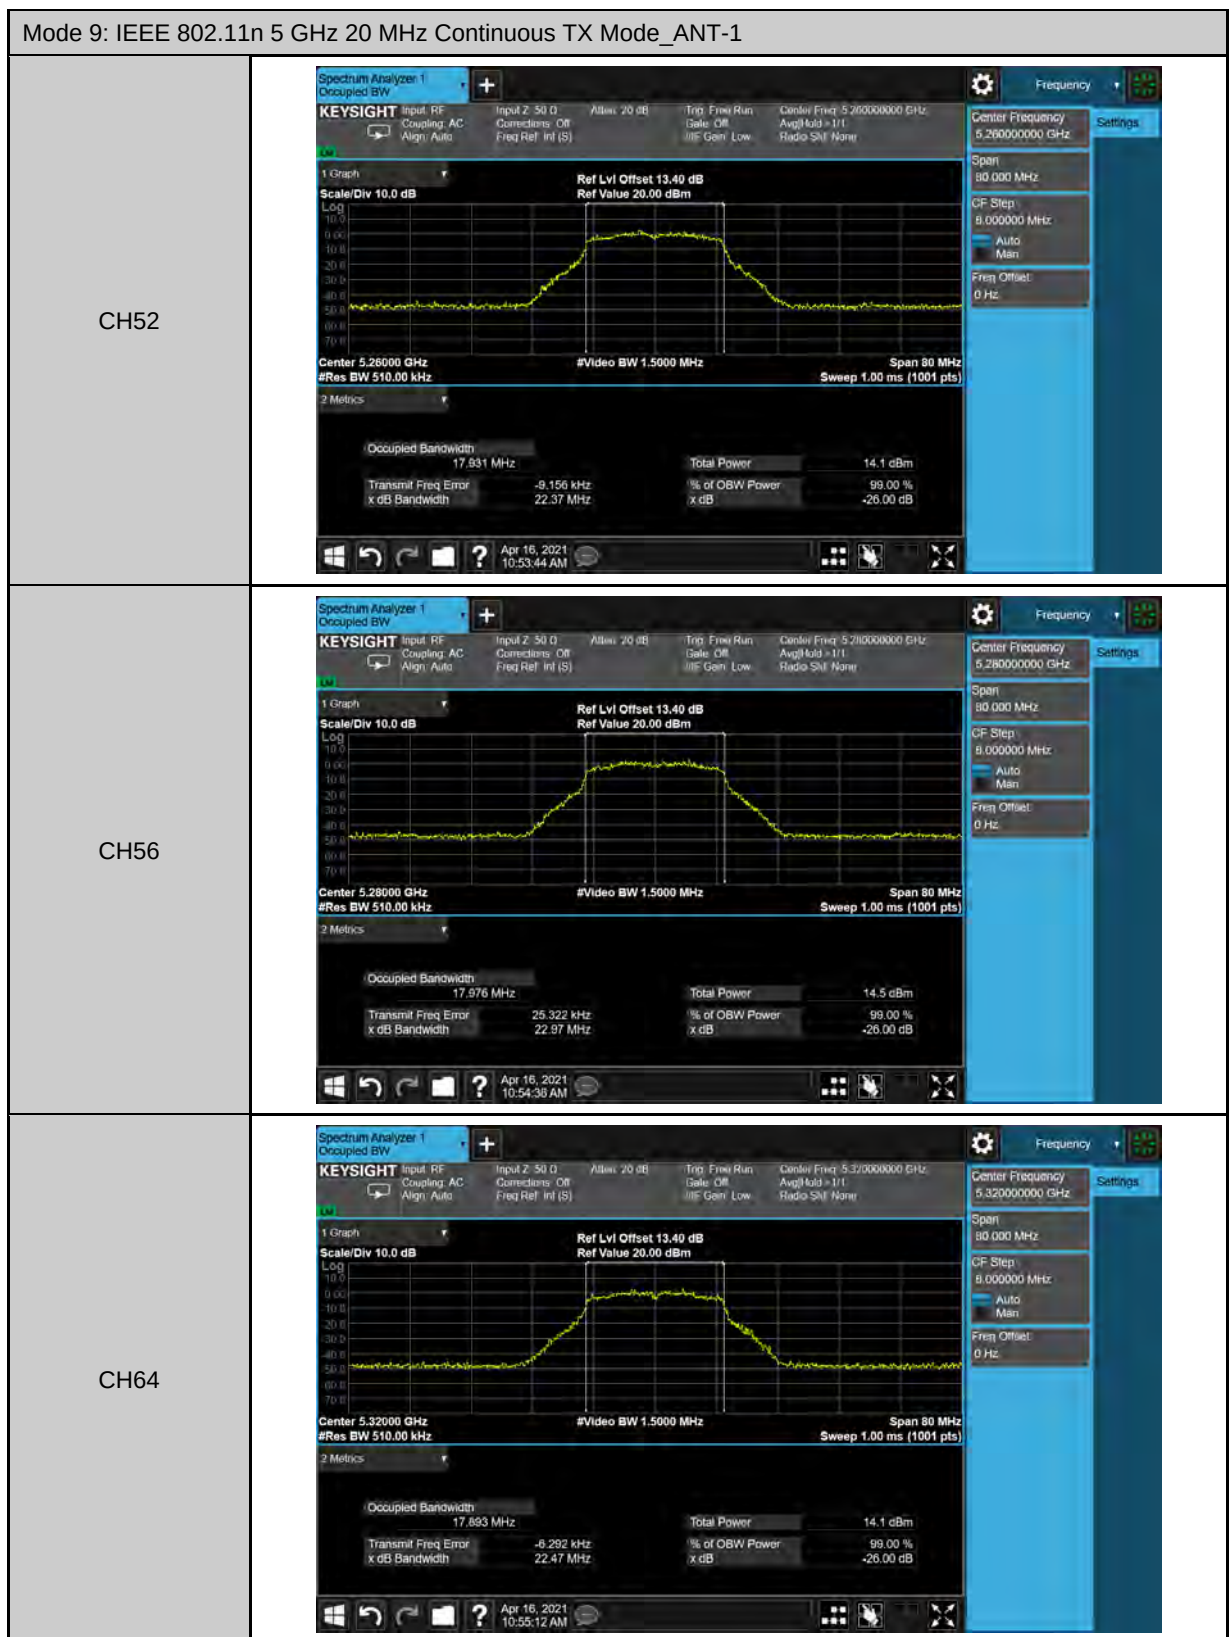


Mode 9: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode_ANT-1


CH100




CH112

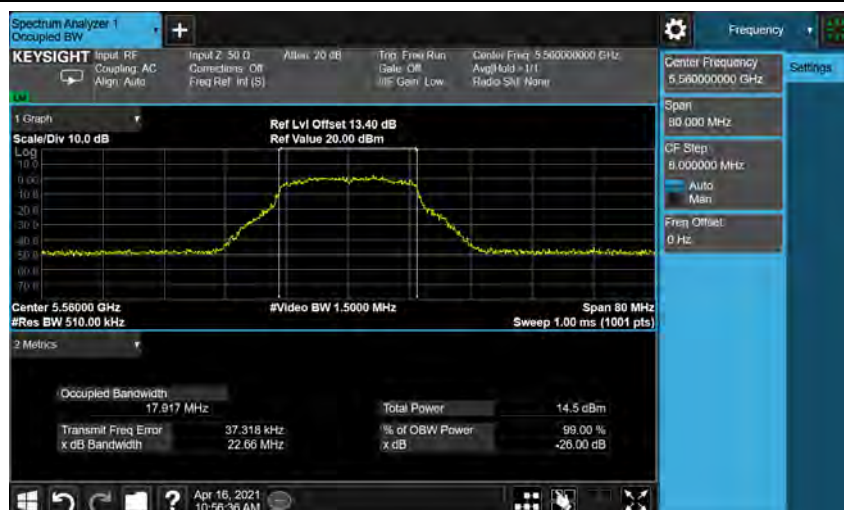


CH140

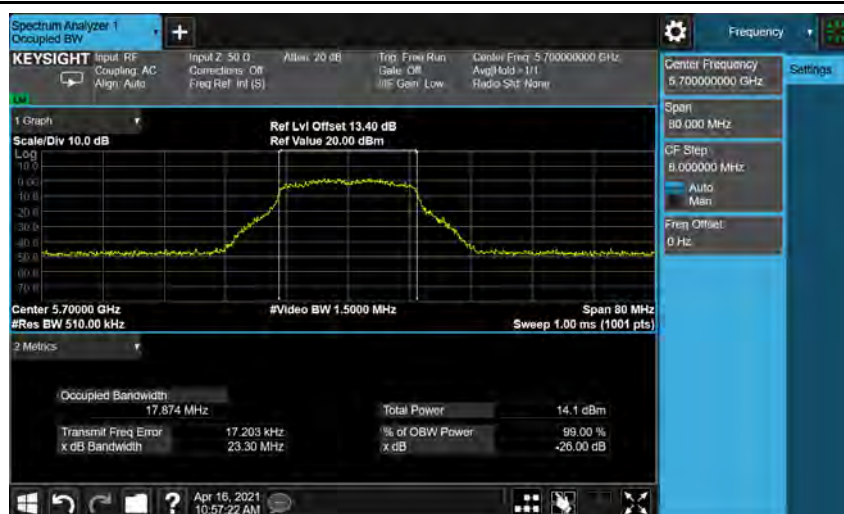


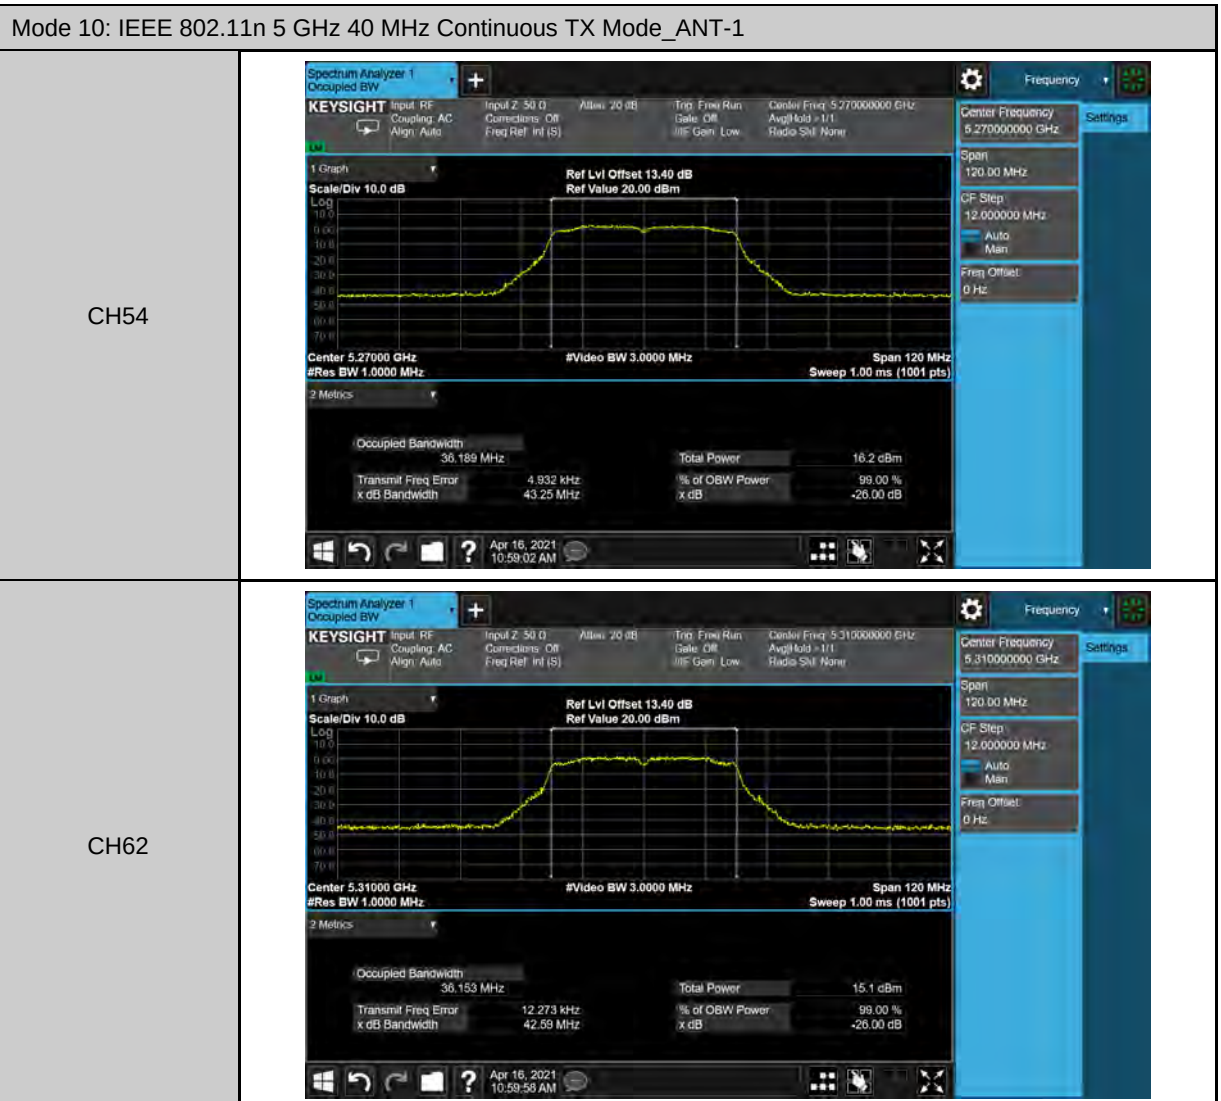




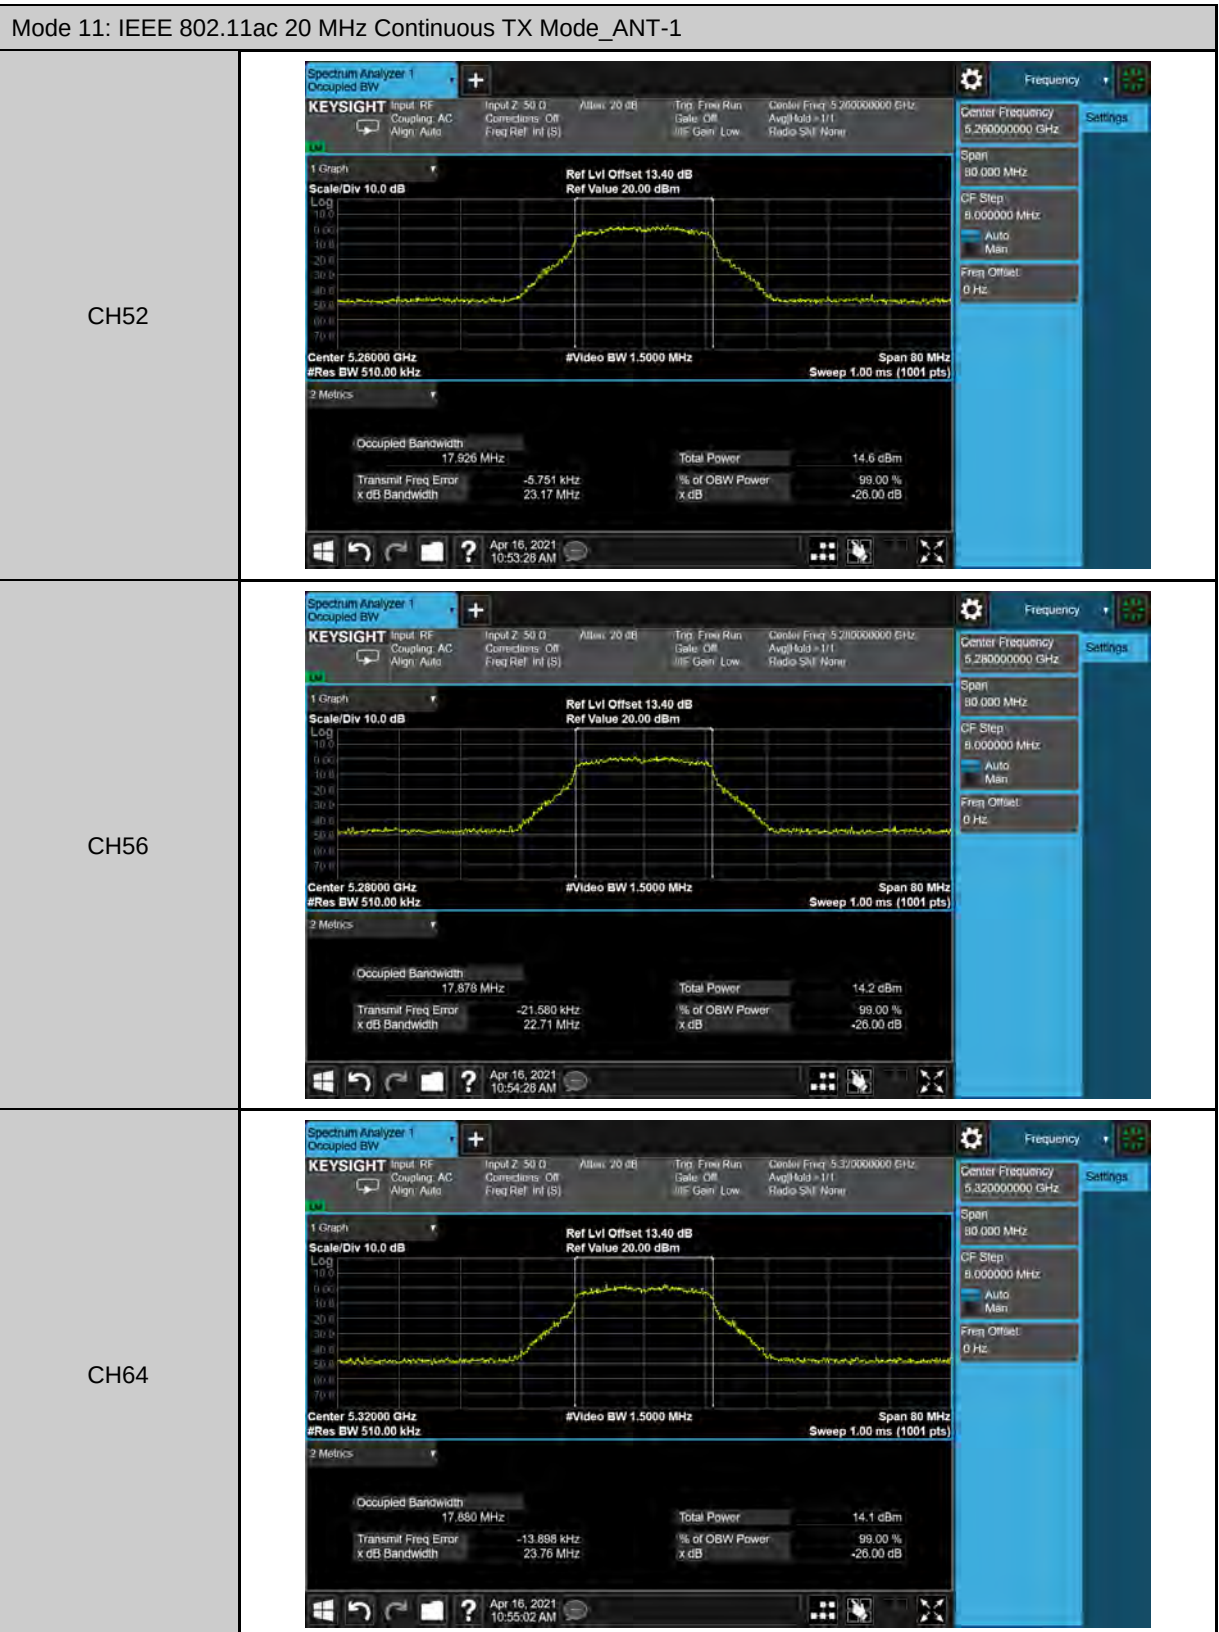





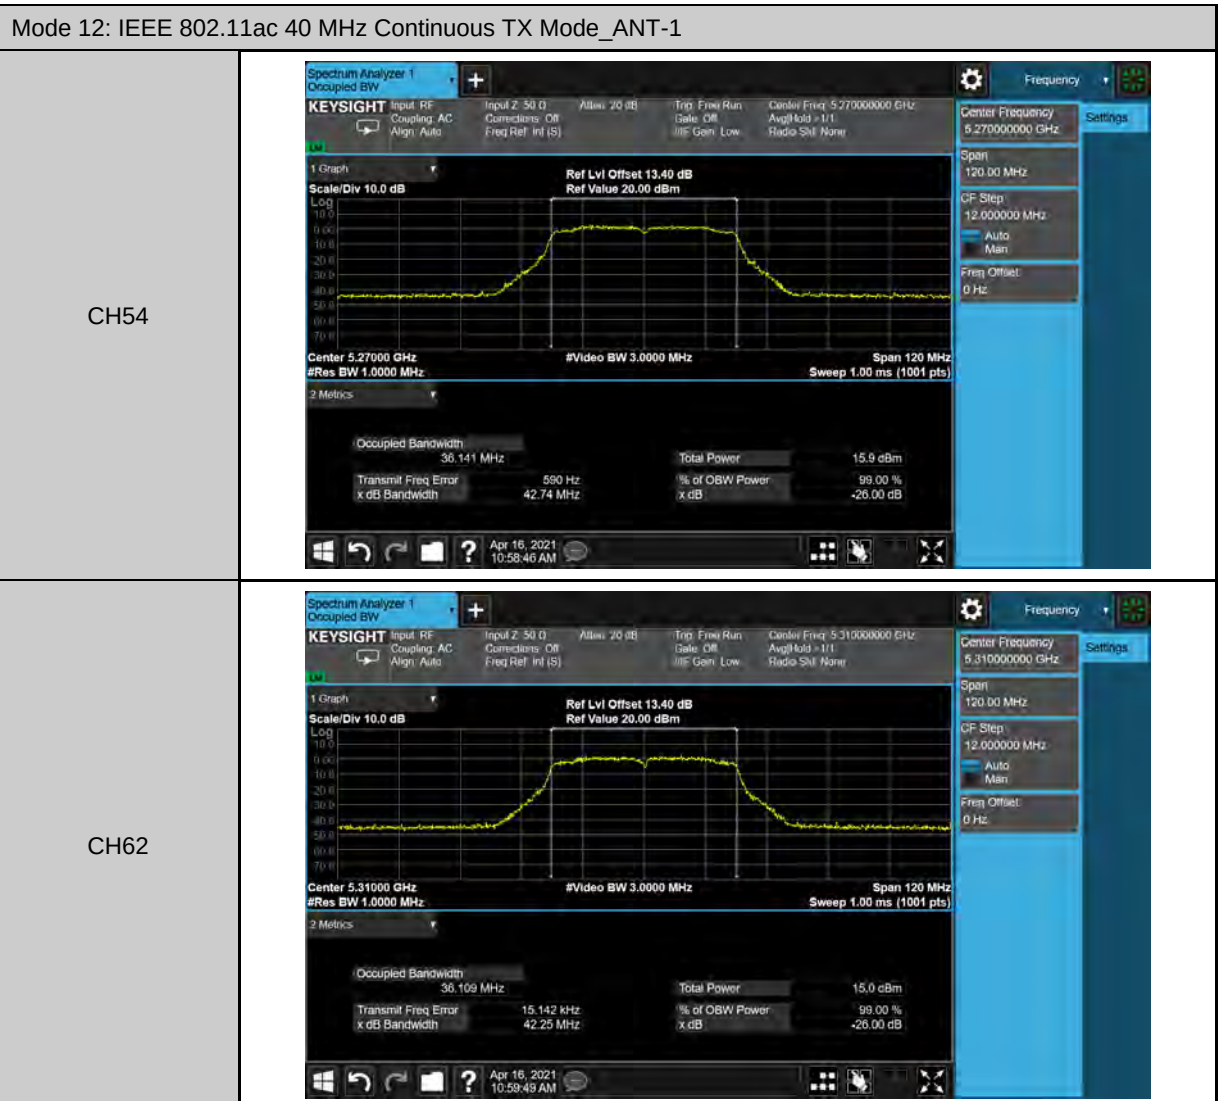




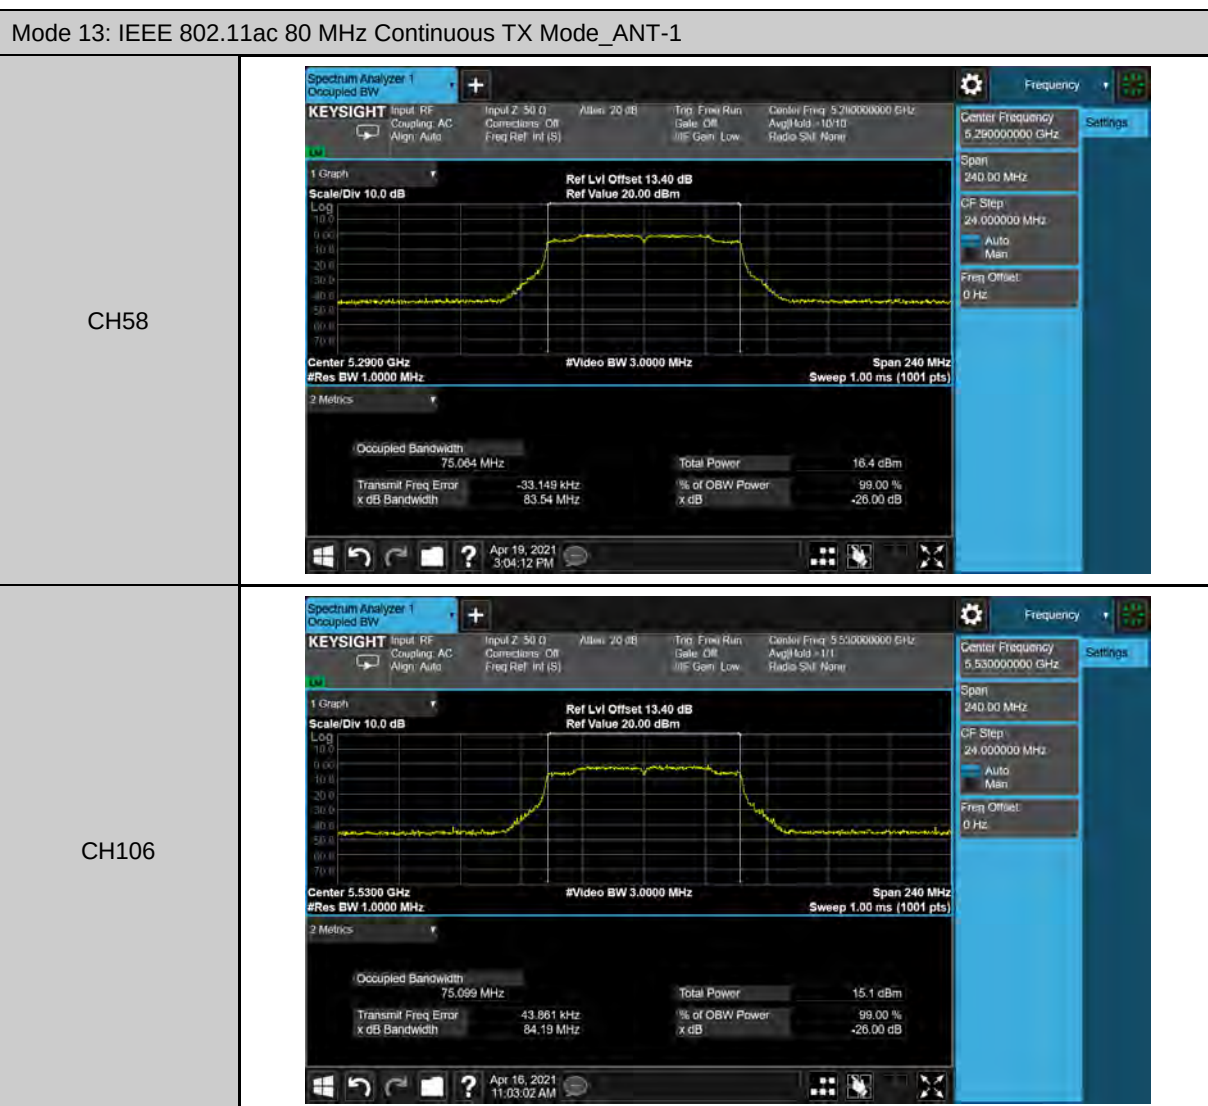


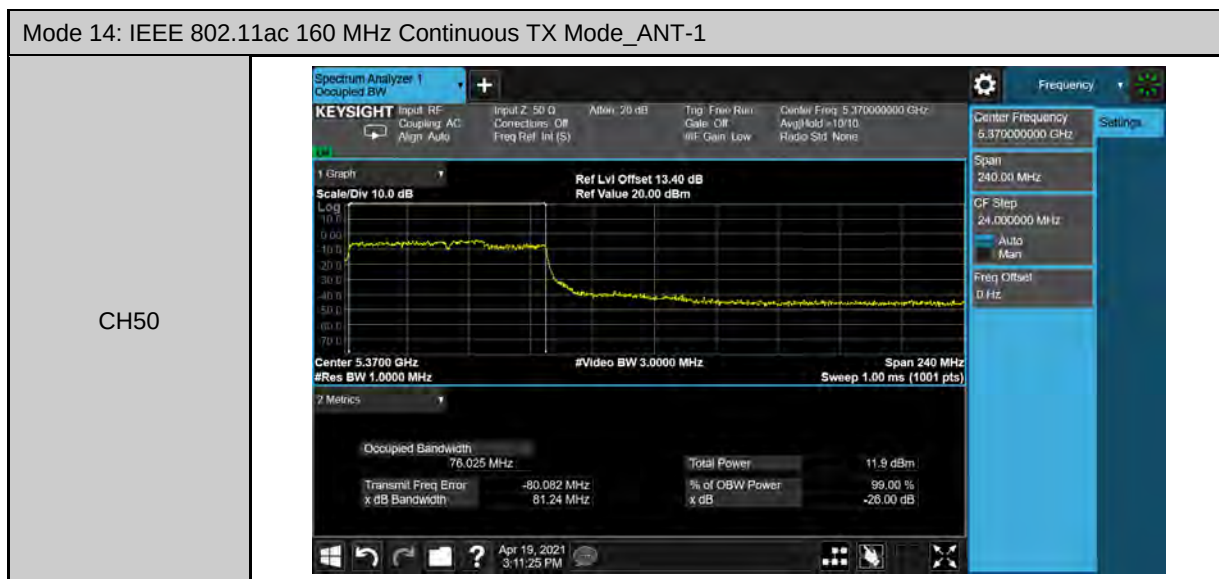


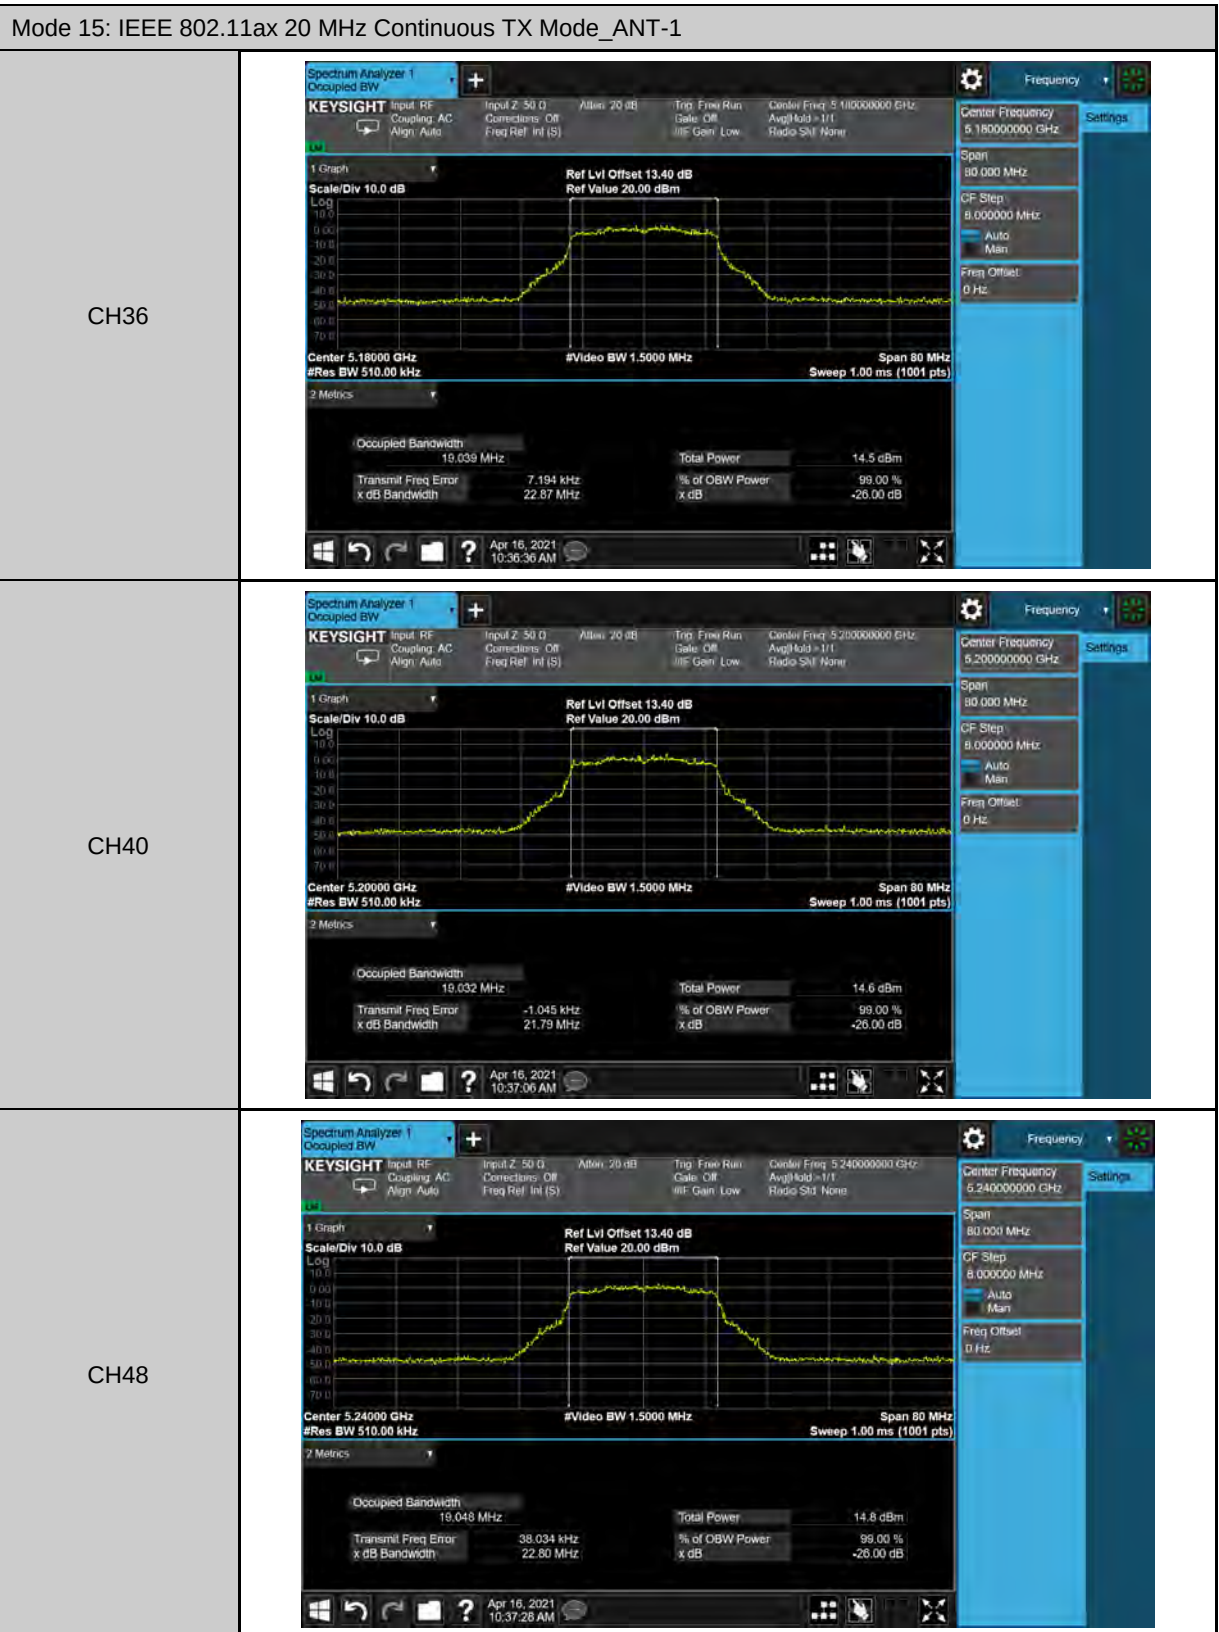


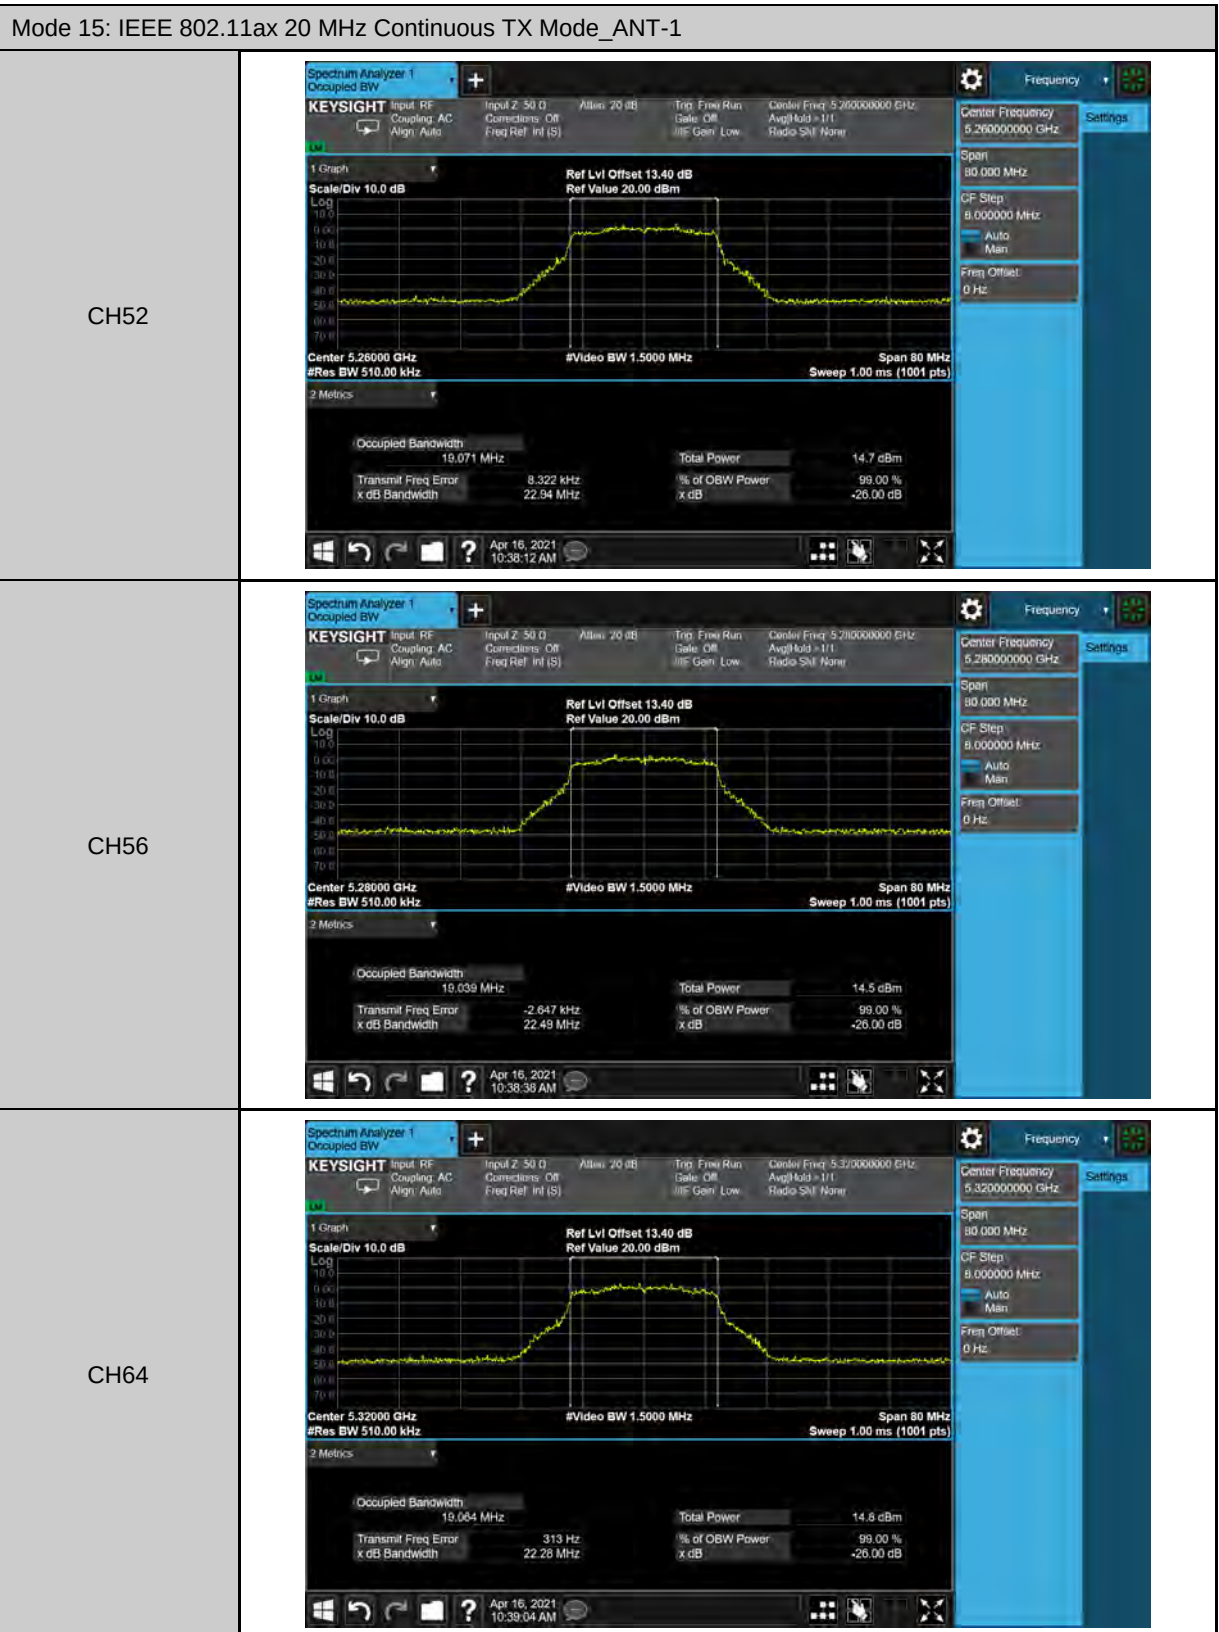




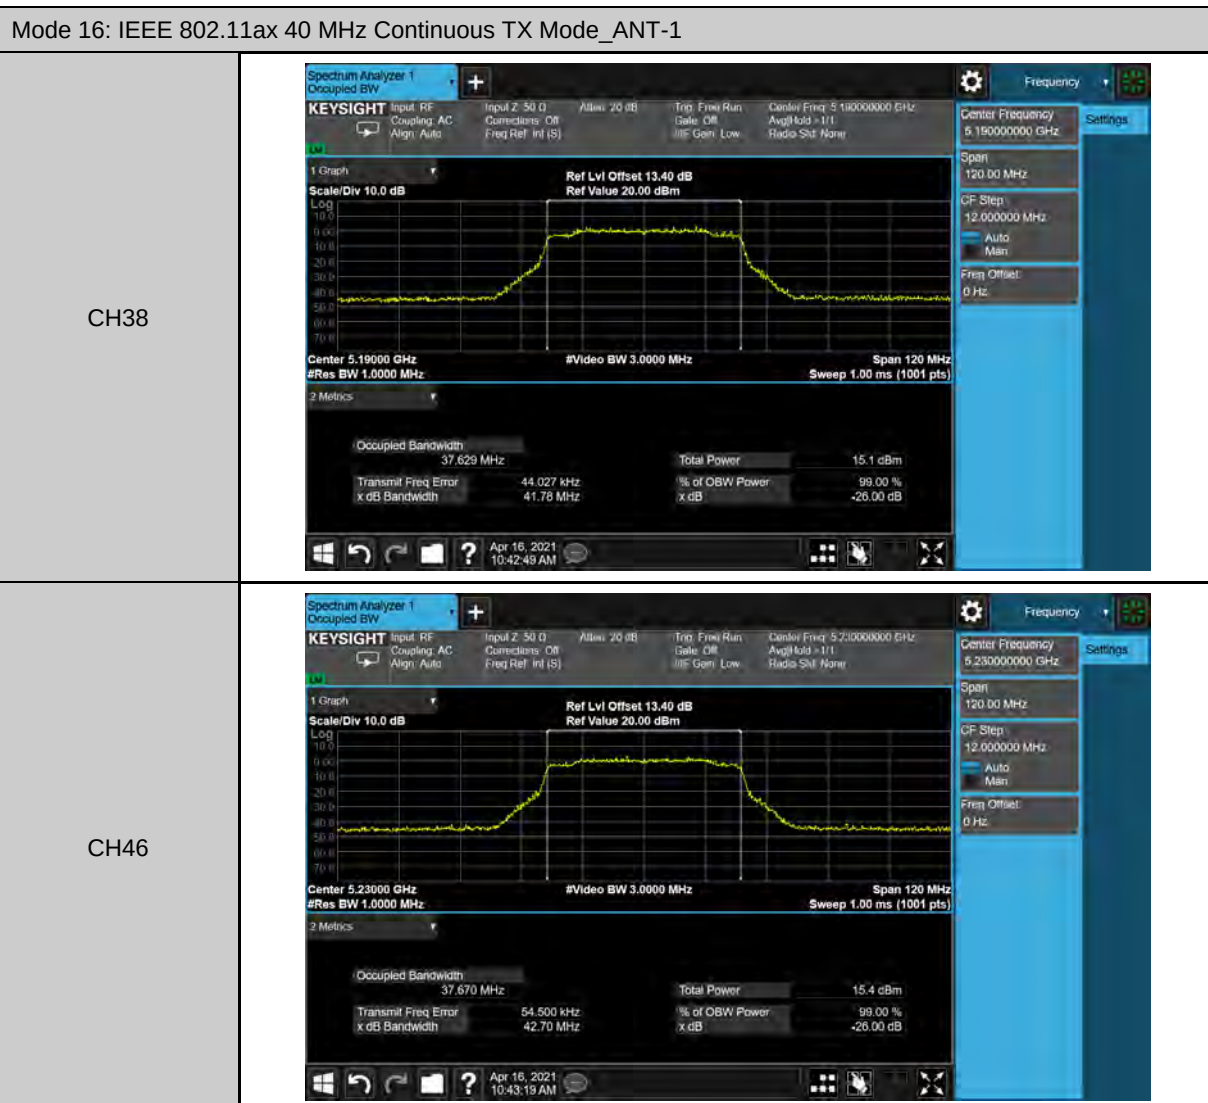

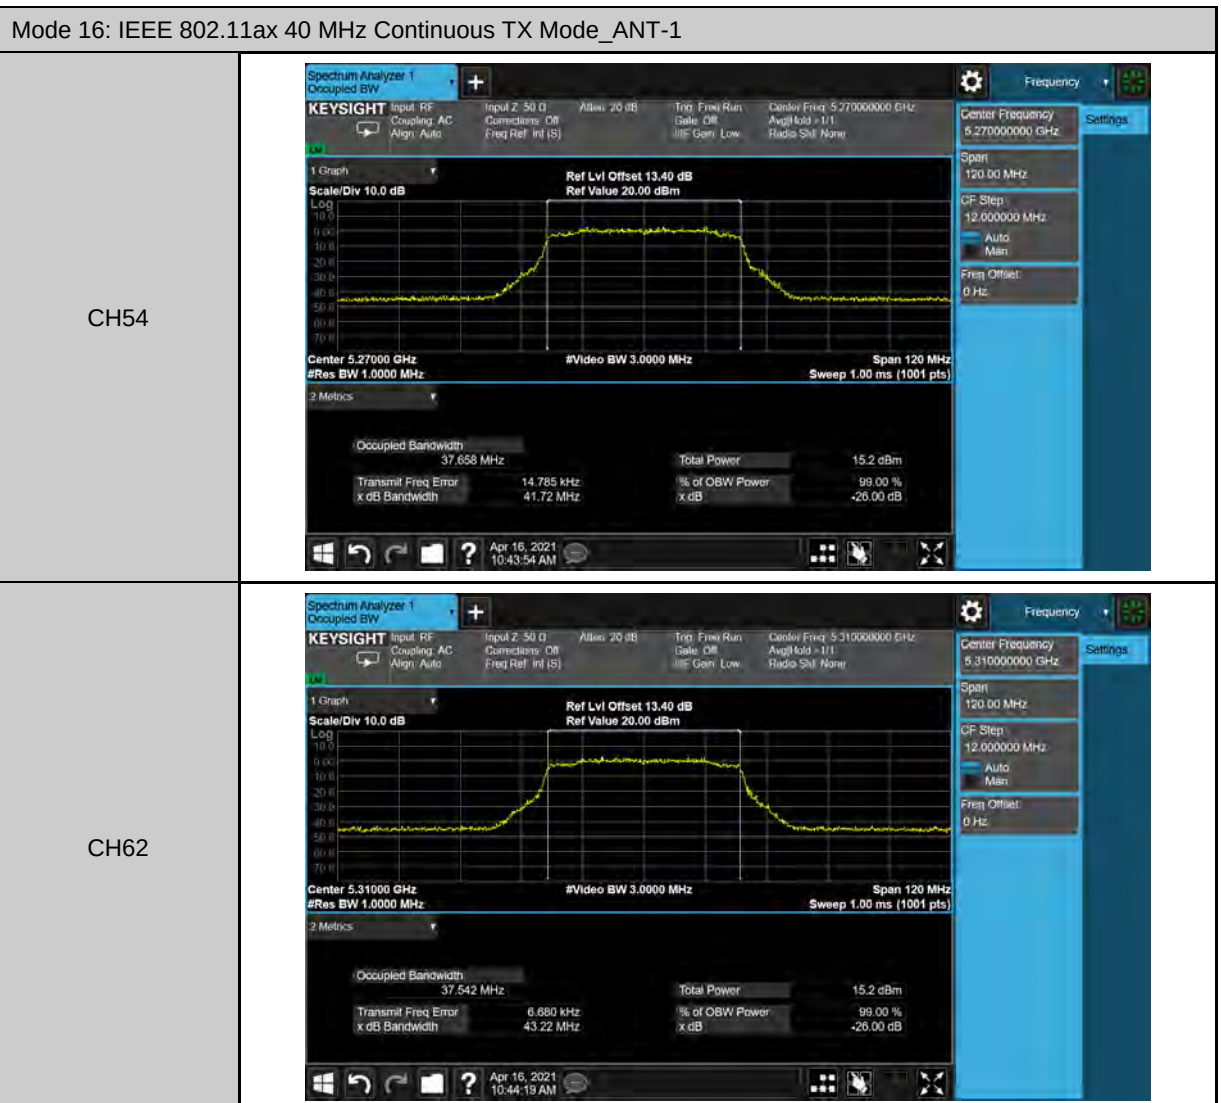

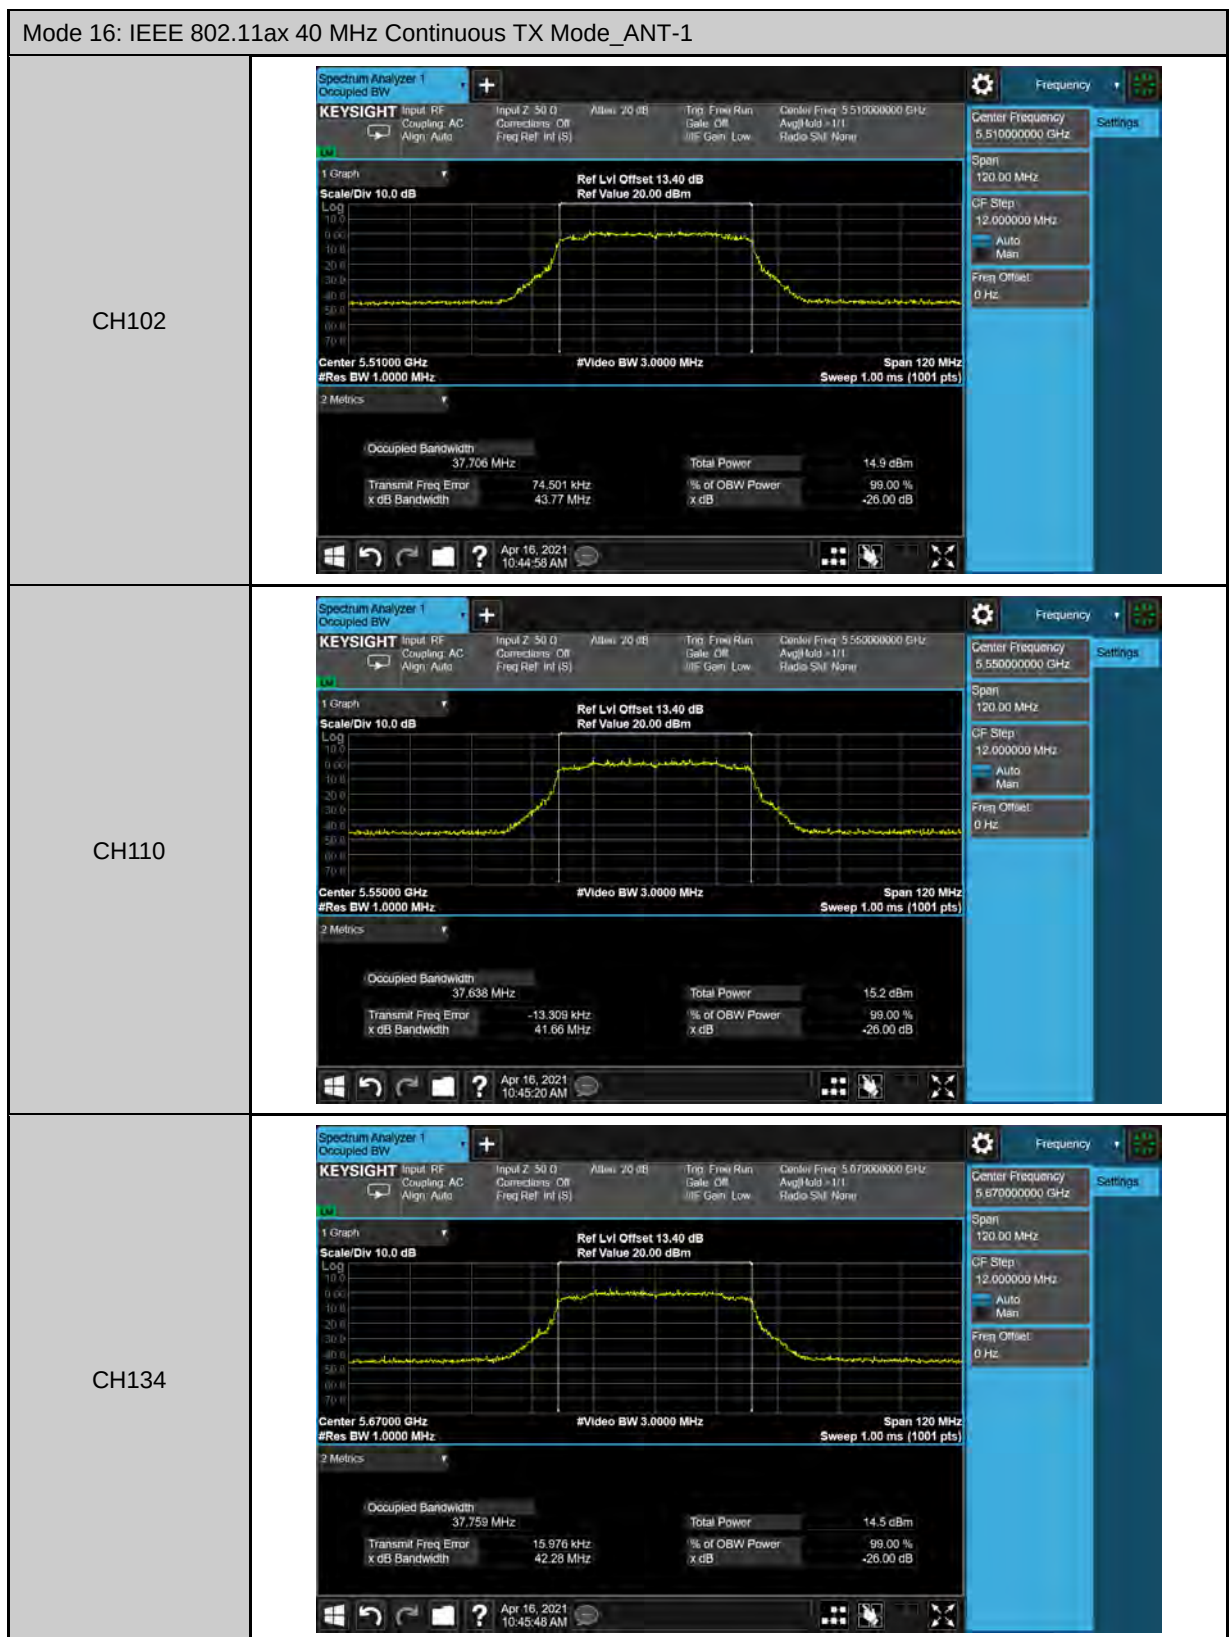

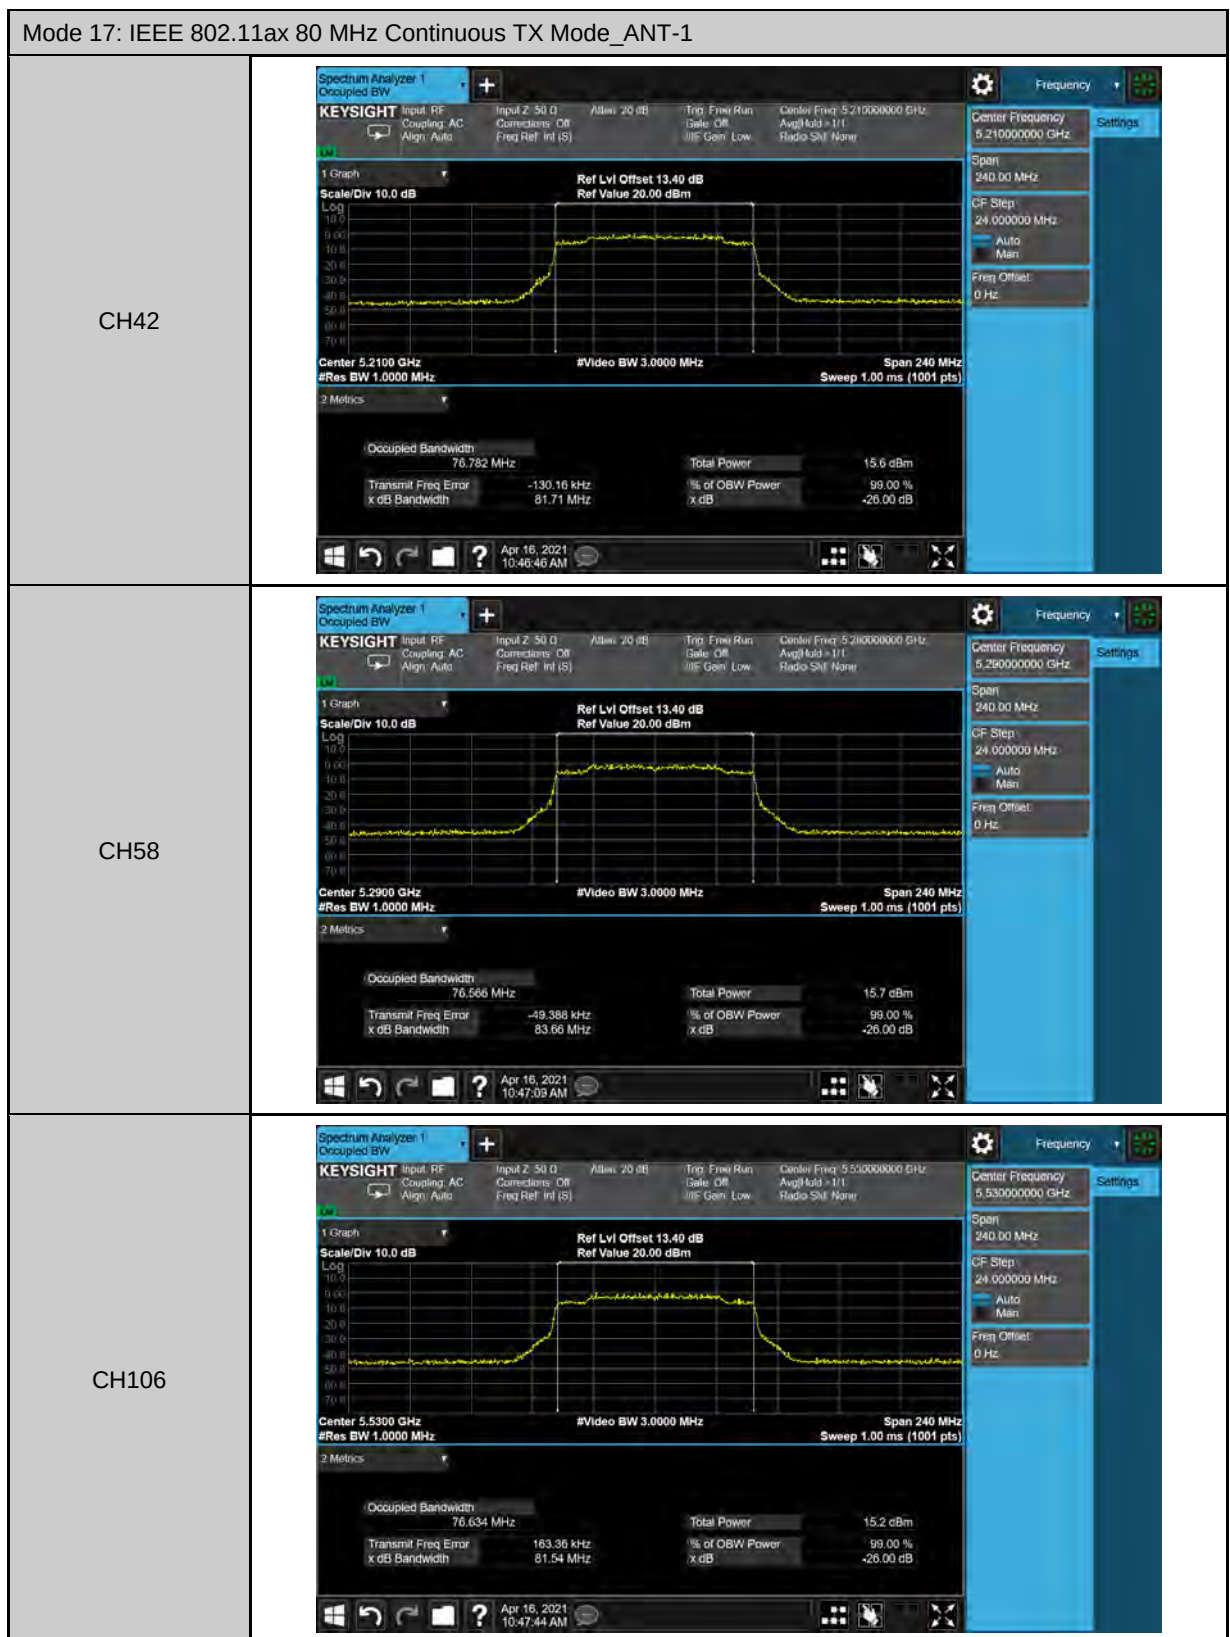




6 dB Bandwidth


操作模式	頻道 (CH)	頻率 (MHz)	6 dB 頻寬量測值 (kHz)		限制值 (kHz)
			ANT-0	ANT-1	
Mode 8	149	5745	15230	---	≥ 500
	157	5785	13580	---	≥ 500
	165	5825	14870	---	≥ 500
Mode 15	149	5745	15210	16250	≥ 500
	157	5785	15230	15380	≥ 500
	165	5825	15230	17550	≥ 500
Mode 16	151	5755	34450	31270	≥ 500
	159	5795	32370	35220	≥ 500
Mode 17	155	5775	72790	73230	≥ 500

Mode 8: IEEE 802.11a Continuous TX Mode_ANT-0


CH149

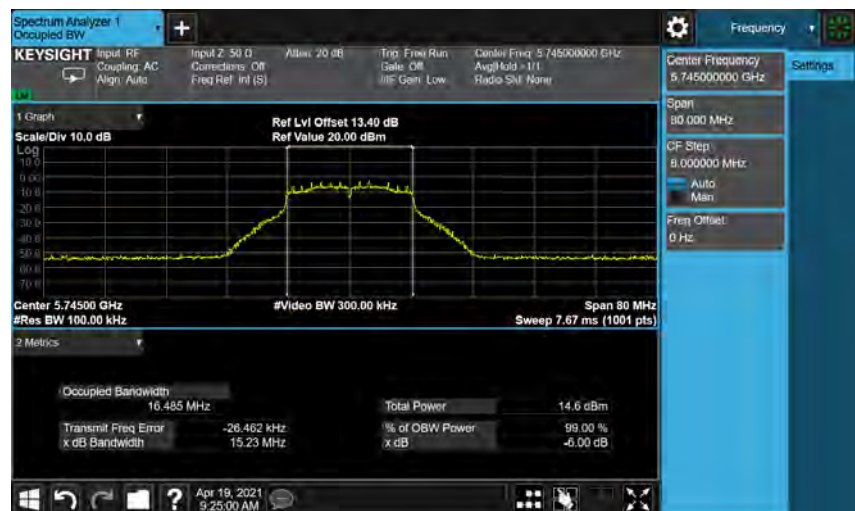



CH157

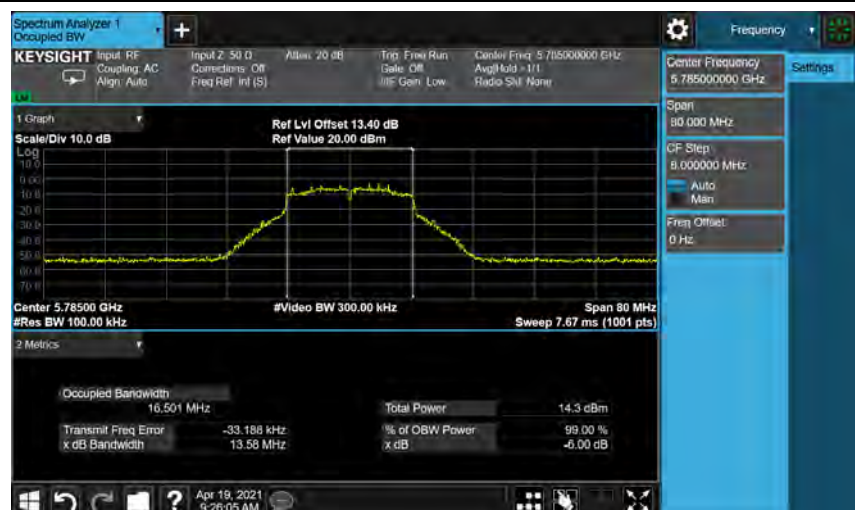


CH165

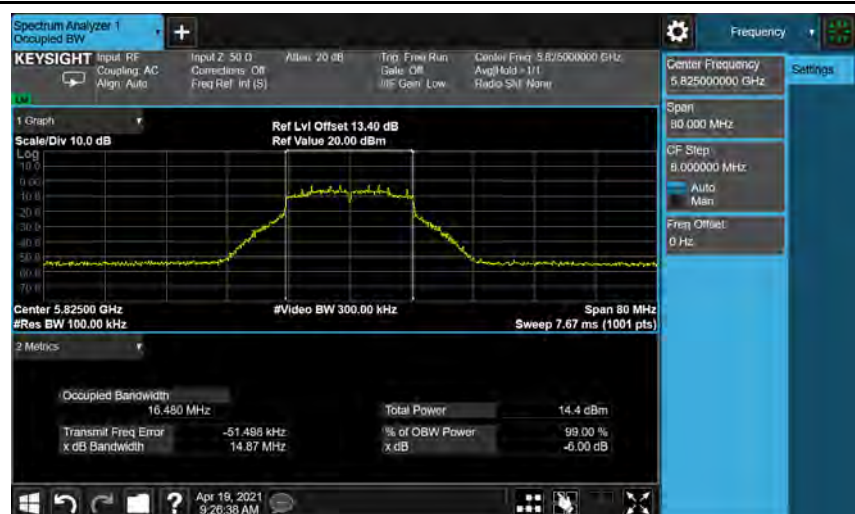


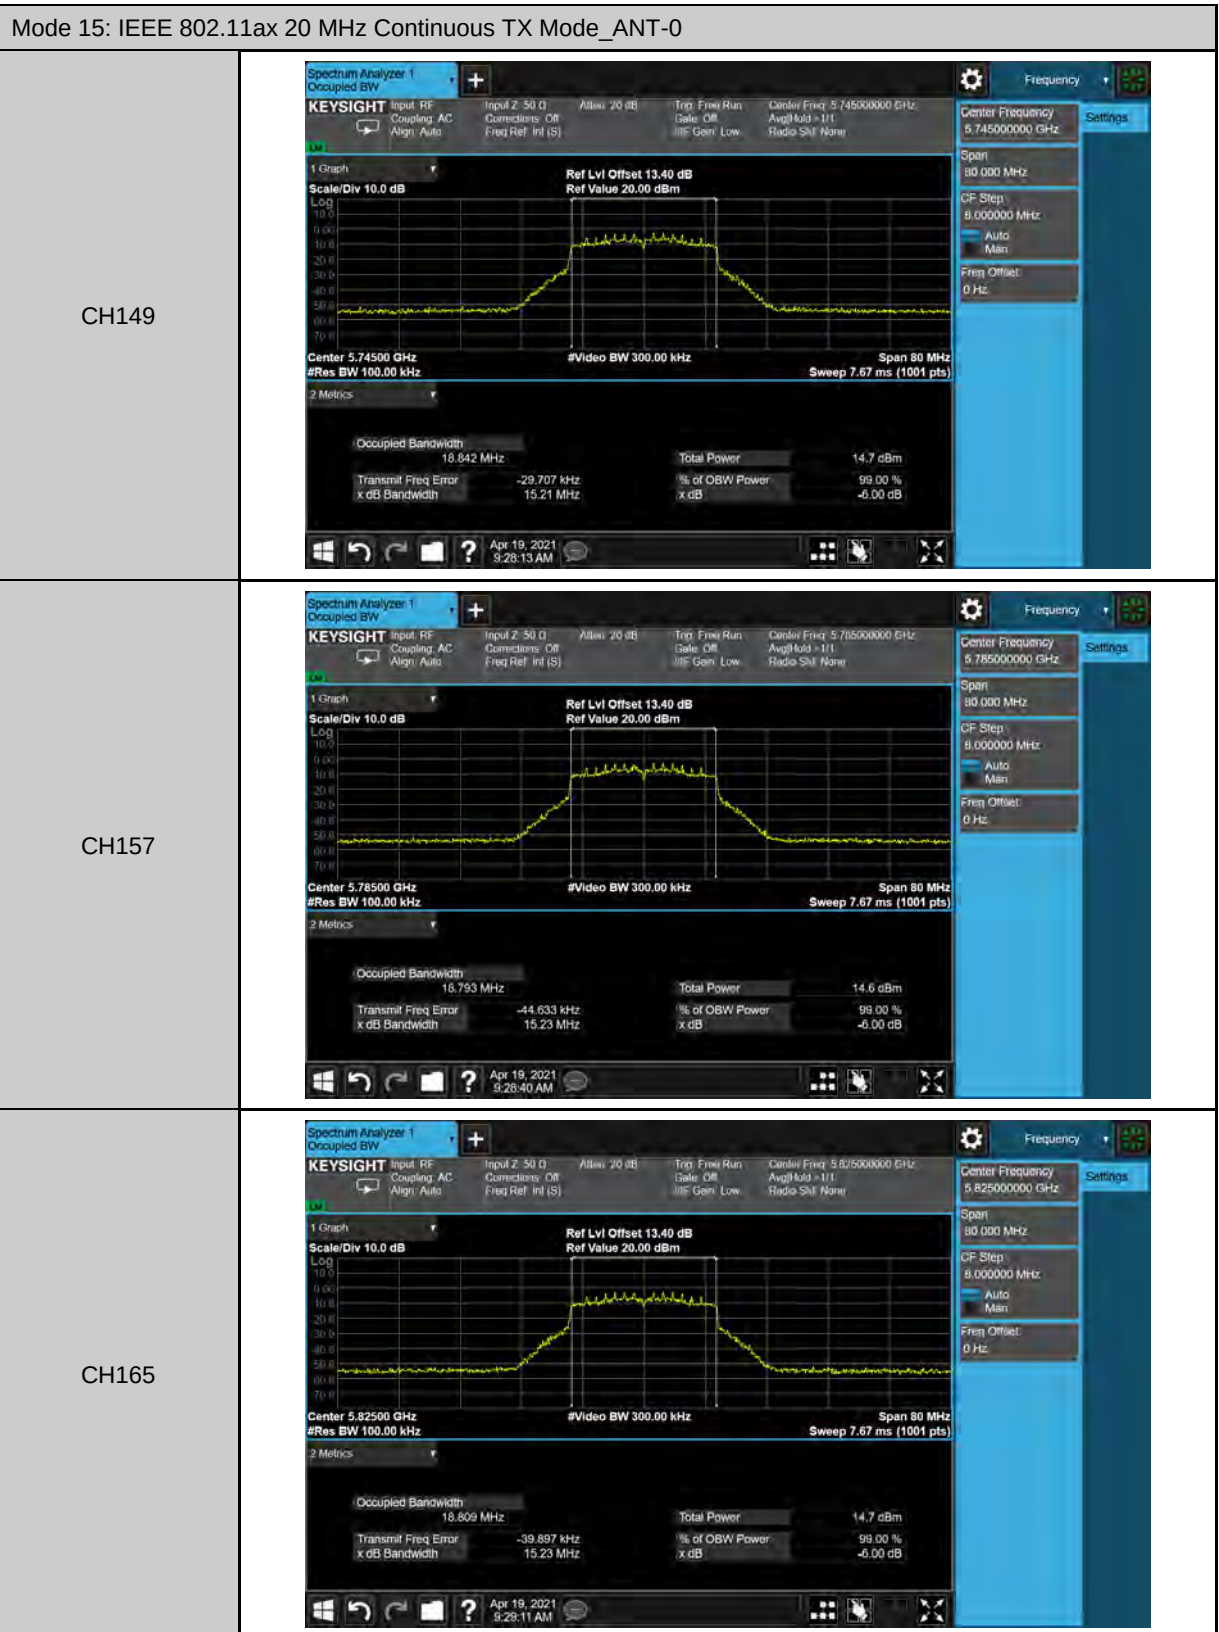


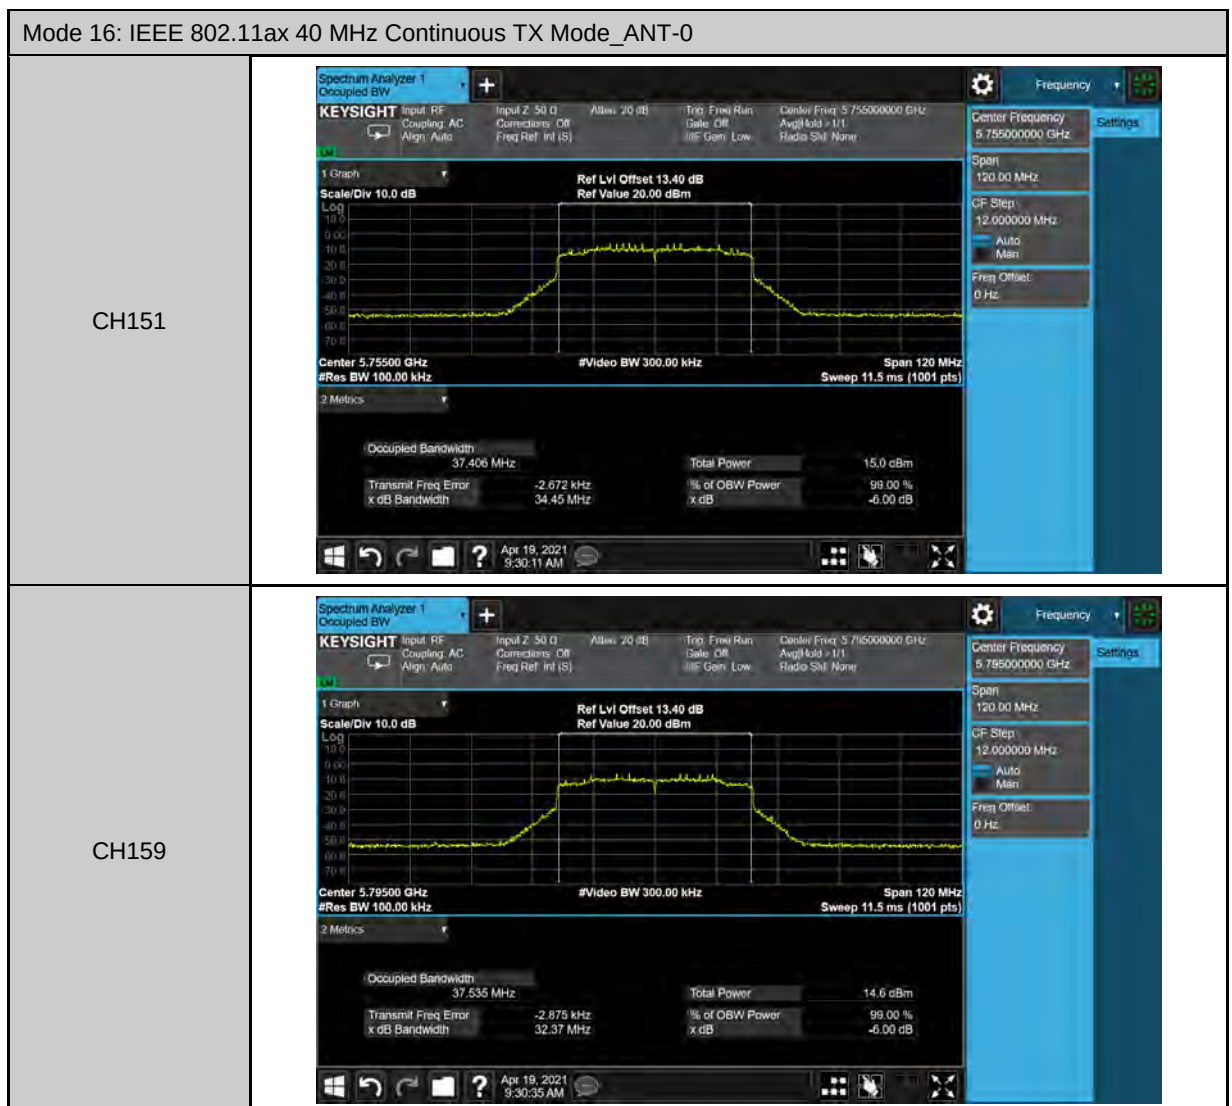

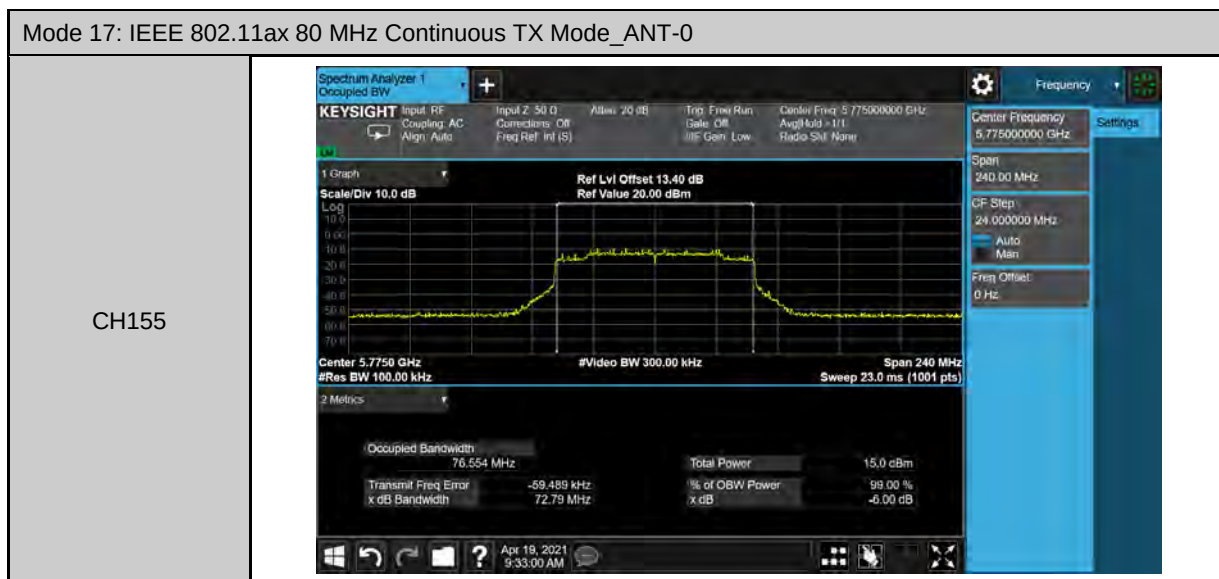



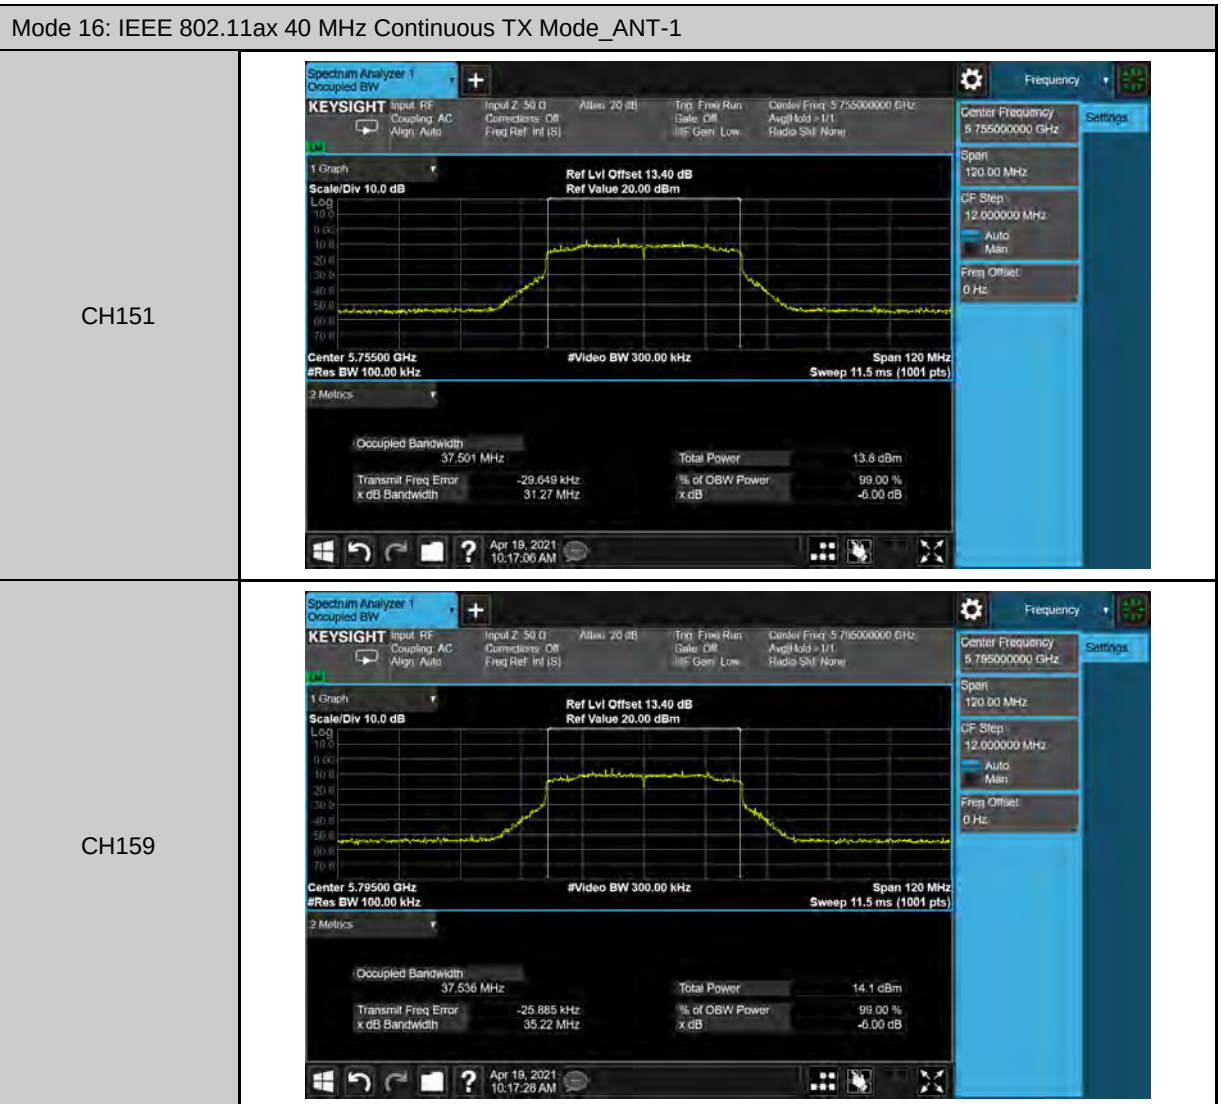

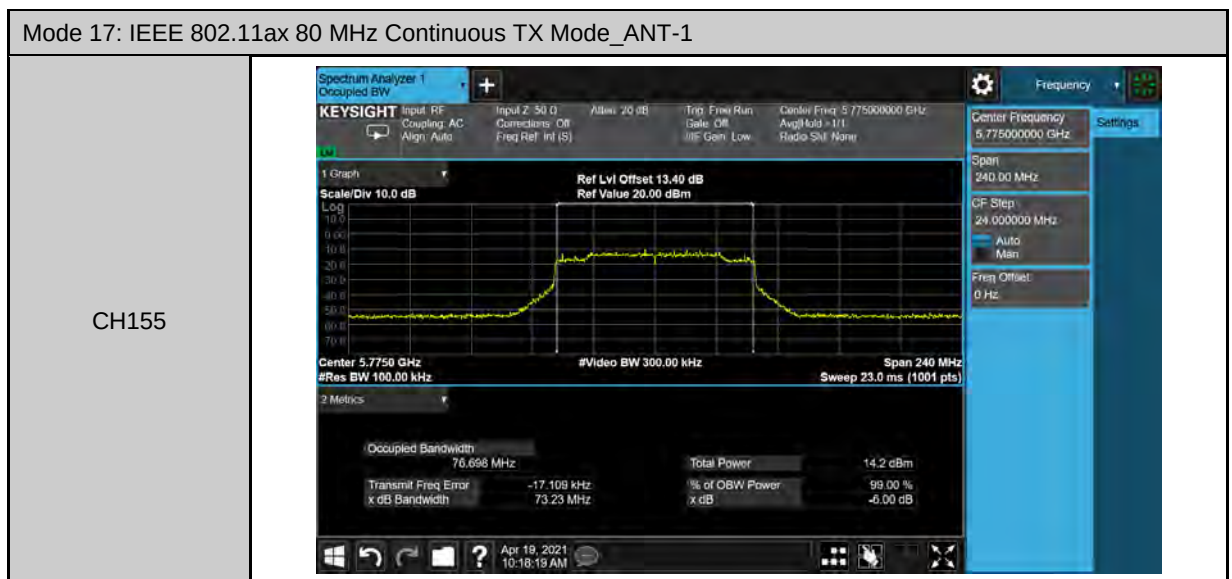

發射功率控制(TPC)

測試結果	:	Mode 8: EIRP = 9.036 mW < 500 mW , 故不需評估發射功率控制(TPC)。
		Mode 9: EIRP = 32.401 mW < 500 mW , 故不需評估發射功率控制(TPC)。
		Mode 10: EIRP = 33.539 mW < 500 mW , 故不需評估發射功率控制(TPC)。
		Mode 11: EIRP = 32.514 mW < 500 mW , 故不需評估發射功率控制(TPC)。
		Mode 12: EIRP = 33.695 mW < 500 mW , 故不需評估發射功率控制(TPC)。
		Mode 13: EIRP = 33.744 mW < 500 mW , 故不需評估發射功率控制(TPC)。
		Mode 14: EIRP = 17.074 mW < 500 mW , 故不需評估發射功率控制(TPC)。
		Mode 15: EIRP = 34.083 mW < 500 mW , 故不需評估發射功率控制(TPC)。
		Mode 16: EIRP = 33.811 mW < 500 mW , 故不需評估發射功率控制(TPC)。
		Mode 17: EIRP = 33.862 mW < 500 mW , 故不需評估發射功率控制(TPC)。
		Mode 18: EIRP = 17.434 mW < 500 mW , 故不需評估發射功率控制(TPC)。

動態頻率選擇(DFS)

操作模式	:	Mode 18
測試結果	:	不適用，此產品為受控裝置，因此不須評估動態頻率選擇(DFS)


頻道可用性檢查時間

操作模式	:	Mode 18
測試結果	:	不適用；此產品為受控裝置，因此不須評估頻道可用性檢查時間


頻道移動時間

操作模式	Frequency (MHz)	Radar Type	Channel Move Time (sec)	Limit (sec)
Mode 18	5250	Type 0	0.8500	10

操作模式	Frequency (MHz)	Radar Type	Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
Mode 18	5250	Type 0	48.4988	200

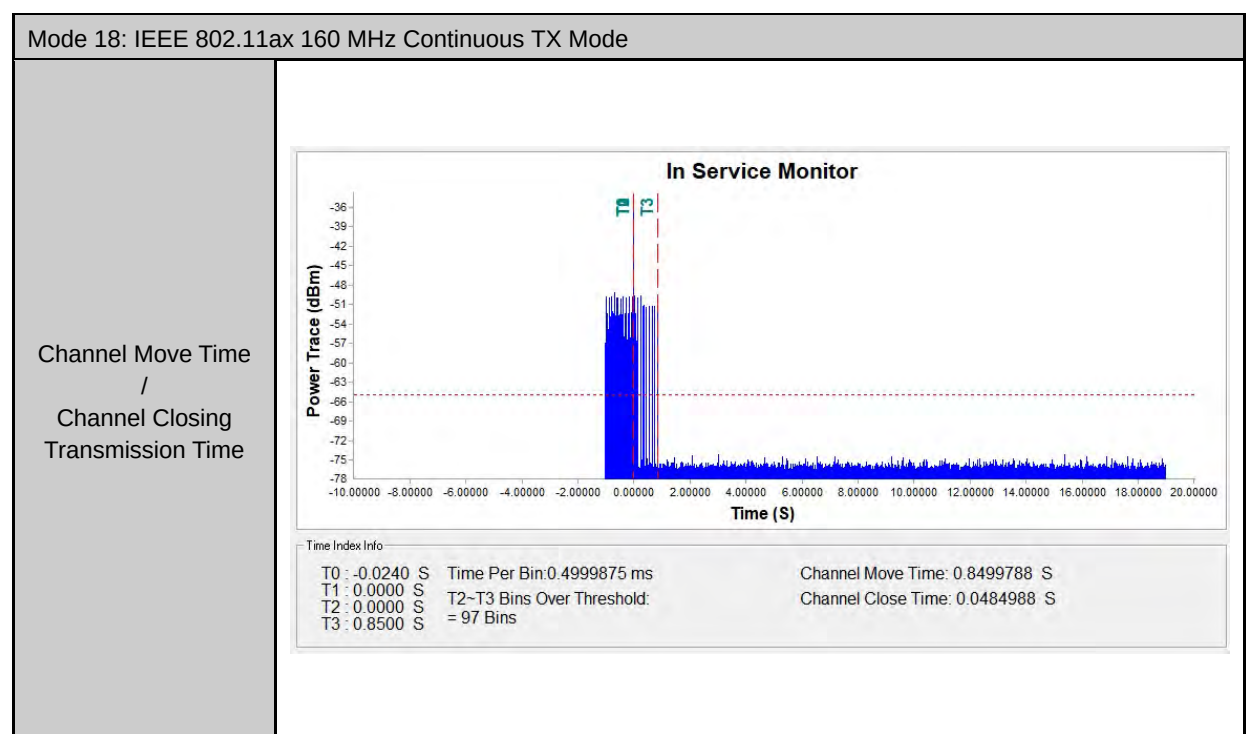

不可佔用時間

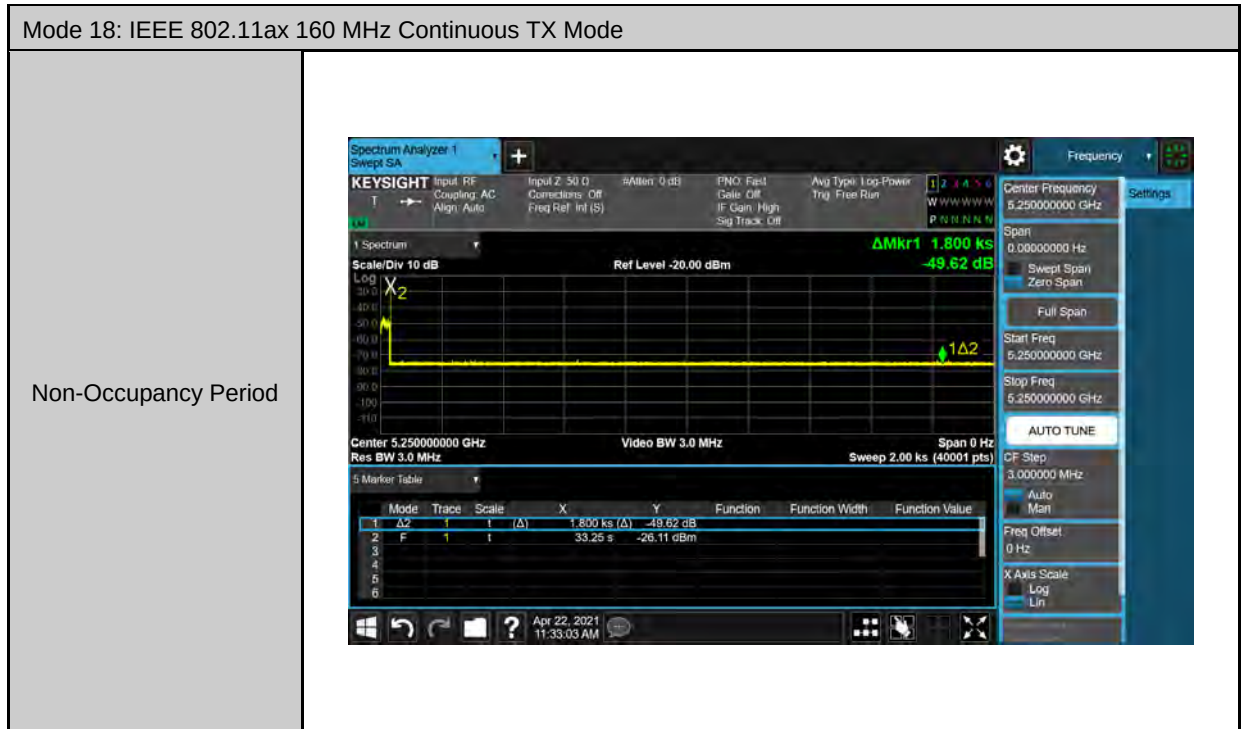

電波暴露量之評估

Band	Frequency (MHz)	Limit (mW/cm ²)	Distance [R] (cm)	Power [P] (dBm)	ANT Gain (dBi)	Numeric Gain [G] (dBi)	Duty Cycle	With Duty cycle [P] × [G] (mW)	Power Density [S] (mW/cm ²)
WLAN 2.4 GHz	2412~2462	1	20	13.97	4.35	2.72	1	67.884	0.0135
WLAN 5 GHz	5180~5825	1	20	10.36	5	3.16	1	34.335	0.0068

---END---