

低功率射頻器材技術規範測試報告

報告編號

RTBCWK-WTW-P21050819

申請者

華碩電腦股份有限公司

產品名稱

Wireless-AX1800 雙頻 WiFi 6 無線路由器

型號

RT-AX1800S

製造廠商

SHENZHEN GONGJIN ELECTRONICS CO.,LTD

商標或廠牌

ASUS

該產品樣品試驗
依據之試驗標準

國家通訊傳播委員會低功率射頻器材技術規範
109 年 7 月 1 日訂定

試驗結果

合格

香港商立德國際商品試驗有限公司桃園分公司林口實驗室
日期 110 年 08 月 30 日

報告簽署人簽章:

陳志偉



目 錄

報告發行紀錄	5
1 低功率射頻器材量測記錄表	7
2 一般敘述	9
2.1 待測設備	9
2.2 輔助測試之週邊設備描述	17
2.3 測試架構圖	17
3 適用規範	18
3.1 規範要求和參考	18
3.2 限制使用之頻帶	23
2.4GHz 頻段測試紀錄結果	24
4 帶外發射之量測	24
4.1 適用標準	24
4.2 量測方法	24
4.3 量測儀器	25
4.4 測試配置	26
4.5 場強度之計算	27
4.6 量測結果	28
4.6.1 發射諧波	28
4.6.2 接收諧波	52
4.6.3 其它不必要之訊號	54
4.7 量測結果判定	55
4.8 配置照片	55
4.9 帶外發射之量測 (傳導)	56
4.10 量測結果判定	64
5 電源線傳導干擾之量測	65
5.1 適用標準	65
5.2 量測方法	65
5.3 量測儀器	65
5.4 測試配置	66
5.5 干擾值之計算	66
5.6 量測結果	67
5.7 量測結果判定	68
5.8 配置照片	68
6 發射(6 dB)頻寬之要求	69
6.1 適用標準	69
6.2 量測方法	69
6.3 量測儀器	69
6.4 測試配置	69
6.5 量測結果	70
6.6 量測結果判定	71
7 峰值傳導輸出功率之量測	72
7.1 適用標準	72
7.2 量測方法	72
7.3 量測儀器	72
7.4 測試配置	72

7.5	量測結果	73
7.6	量測結果判定	76
8	功率頻譜密度之量測	77
8.1	適用標準	77
8.2	量測方法	77
8.3	量測儀器	77
8.4	測試配置	77
8.5	量測結果	78
8.6	量測結果判定	80
	U-NII 頻段測試紀錄結果	81
9	帶外發射之量測	81
9.1	適用標準	81
9.2	量測方法	81
9.3	量測儀器	81
9.4	測試配置	81
9.5	場強度之計算	82
9.6	量測結果	83
9.6.1	發射諧波	83
9.6.2	接收諧波	137
9.6.3	其它不必要之訊號	139
9.7	量測結果判定	140
9.8	配置照片	140
10	電源線傳導干擾之量測	141
10.1	適用標準	141
10.2	量測方法	141
10.3	量測儀器	141
10.4	測試配置	141
10.5	干擾值之計算	141
10.6	量測結果	142
10.7	量測結果判定	143
10.8	配置照片	143
11	峰值傳導輸出功率量測及發射頻寬之要求	144
11.1	適用標準	144
11.2	量測方法	144
11.3	量測儀器	144
11.4	測試配置	144
11.5	量測結果	145
11.6	量測結果判定	150
12	功率頻譜密度之量測	151
12.1	適用標準	151
12.2	量測方法	151
12.3	量測儀器	151
12.4	測試配置	151
12.5	量測結果	152
12.6	量測結果判定	157
13	6 dB 頻寬之要求	158
13.1	適用標準	158

13.2	量測方法	158
13.3	量測儀器	158
13.4	測試配置	158
13.5	量測結果	159
13.6	量測結果判定	160
14	電波暴露量之評估	161
14.1	適用標準	161
14.2	評估方法	161
14.3	評估結果	162
15	檢測實驗室基本資料	163

報告發行紀錄

Issue No.	Description	Date Issued
RTBCWK-WTW-P21050819	Original release	110 年 08 月 30 日

證 明 書

發行日期：110 年 08 月 30 日

產 品 名 稱：Wireless-AX1800 雙頻 WiFi 6 無線路由器
廠 牌：ASUS
型 號：RT-AX1800S
申 請 者：華碩電腦股份有限公司
量 測 規 範：低功率射頻器材技術規範 LP0002 (訂定日期：109 年 7 月 1 日)
ANSI C63.10-2013

香港商立德國際商品試驗有限公司桃園分公司在此證明上述待測設備樣品一組(型號：RT-AX1800S)，
收件日期 110 年 05 月 21 日，於 110 年 07 月 14 日至 110 年 08 月 05 日，已在本公司的標準測試
場地完成量測。報告中所描述之測試結果和待測設備的架構組合，均根據樣品實際的量測情況作詳
實的記錄。

立德桃園分公司依“低功率射頻器材技術規範”及“電信管制射頻器材審驗管理辦法”製作測試結果
報告。

特 此 證 明 ！

報告製作者：



周 歆 穎 / 高級專員

， 日 期：

110 年 08 月 30 日

審 核 者：



陳 志 偉 / 高級工程師

， 日 期：

110 年 08 月 30 日

香港商立德國際商品試驗有限公司桃園分公司

實驗室地址：新北市林口區嘉寶里 14 鄰 47-2 號

此份報告不得摘錄複製，除全份
複製外，需經實驗室書面同意。



1 低功率射頻器材量測記錄表

申請廠商: 華碩電腦股份有限公司

製造廠商: SHENZHEN GONGJIN ELECTRONICS CO.,LTD

申請廠商地址: 台北市北投區立德路 15 號 1 樓

廠牌: ASUS

產品名稱: Wireless-AX1800 雙頻 WiFi 6 無線路由器

型號: RT-AX1800S

量測單位名稱: 香港商立德國際商品試驗有限公司桃園分公司

林口實驗室華亞檢測部

量測單位地址: 桃園市龜山區文化里華亞二路 19 號

量測單位認可編號: TAF 2021 (9kHz~40GHz)

量測規範: 低功率射頻器材技術規範 LP0002 (訂定日期: 109 年 7 月 1 日)
ANSI C63.10-2013

WLAN 2.4GHz 頻段概要

項次	量測項目	規 範	量測結果判定
1	帶外發射	低功率射頻器材技術規範 4.10.1.5 節	合格
2	電源線傳導干擾	低功率射頻器材技術規範 3.3 節	合格
3	6 dB 頻寬	低功率射頻器材技術規範 4.10.1.6 節	合格
4	峰值傳導輸出功率	低功率射頻器材技術規範 4.10.1.2 節	合格
5	功率頻譜密度	低功率射頻器材技術規範 4.10.1.6 節	合格

備註：量測結果之判定不考慮量測不確定度的貢獻。

WLAN 5.150~5.250GHz頻段概要

項次	量測項目	規 範	量測結果判定
1	電源線傳導干擾	低功率射頻器材技術規範3.3節	合格
2	帶外發射	低功率射頻器材技術規範5.7.4節	合格
3	最大傳導輸出功率	低功率射頻器材技術規範5.7.3.1節	合格
4	最大功率頻譜密度	低功率射頻器材技術規範5.7.3.1節	合格

備註：量測結果之判定不考慮量測不確定度的貢獻。

WLAN 5.725~5.850GHz 頻段概要

項次	量測項目	規 範	量測結果判定
1	電源線傳導干擾	低功率射頻器材技術規範3.3節	合格
2	帶外發射	低功率射頻器材技術規範5.7.4節	合格
3	最大傳導輸出功率	低功率射頻器材技術規範5.7.3.3節	合格
4	最大功率頻譜密度	低功率射頻器材技術規範5.7.3.3節	合格
5	6dB 頻寬	低功率射頻器材技術規範5.7.5節	合格

備註：量測結果之判定不考慮量測不確定度的貢獻。

最大暴露允許值(Maximum Permissible Exposure, MPE)

項次	量測項目	規 範	量測結果判定
1	電波暴露量	低功率射頻器材技術規範 6.20.2 節	合格

備註：量測結果之判定不考慮量測不確定度的貢獻。

2 一般敘述

2.1 待測設備

產品名稱：	Wireless-AX1800 雙頻WiFi 6 無線路由器
型號：	RT-AX1800S
額定電源：	12Vdc from adapter
調變技術：	CCK, DQPSK, DBPSK for DSSS 256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDM 1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDMA
傳輸速率：	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 400Mbps (For 2.4G Band) 802.11n: up to 300Mbps (For 5G Band) 802.11ac: up to 866.7Mbps (For 5G Band) 802.11ax: up to 574Mbps (2.4GHz Band) 802.11ax: up to 1201Mbps (5GHz Band)
載波頻率：	2.4GHz: 2412 ~ 2462MHz 5GHz: 5180 ~ 5240MHz, 5745 ~ 5825MHz
頻道數：	2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 11 802.11n (HT40), VHT40, 802.11ax (HE40): 7 5.0GHz: 5180 ~ 5240MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 4 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 2 802.11ac (VHT80), 802.11ax (HE80): 1 5745 ~ 5825MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 5 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 2 802.11ac (VHT80), 802.11ax (HE80): 1
發射功率：	見註 2
天線種類：	見註 3
電源線類別：	見註 4
信號線類別：	見註 4
配件：	見註 4

註 1: 此待測物之技術的種類為2Tx /2Rx之組合。

Band	Modulation Mode	Beamforming Mode	TX Function
2.4G	802.11b	Not Support	2TX
	802.11g	Not Support	2TX
	802.11n (HT20)	Support	2TX
	802.11n (HT40)	Support	2TX
	VHT20	Support	2TX
	VHT40	Support	2TX
	802.11ax (HE20)	Support	2TX
	802.11ax (HE40)	Support	2TX
5G	802.11a	Not Support	2TX
	802.11n (HT20)	Support	2TX
	802.11n (HT40)	Support	2TX
	802.11ac (VHT20)	Support	2TX
	802.11ac (VHT40)	Support	2TX
	802.11ac (VHT80)	Support	2TX
	802.11ax (HE20)	Support	2TX
	802.11ax (HE40)	Support	2TX
	802.11ax (HE80)	Support	2TX

* For all test items except conducted output power, the modulation and bandwidth are similar for 802.11n mode for HT20 / HT40, 802.11ac mode for VHT20 / VHT40 / VHT80 and 802.11ax mode for HE20 / HE40 / HE80, therefore HE20 / HE40 / HE80 were worst case to representative mode in test report.

* CDD mode is the worst case for final tests after pretesting CDD mode and beamforming mode except output power test.

註 2: 發射功率如下

Frequency Band (MHz)	Mode	發射功率 (dBm)	
		CDD	Beamforming
2412 ~ 2462MHz	802.11b	24.91	-
	802.11g	27.65	-
	802.11n (HT20)	26.85	26.85
	802.11n (HT40)	20.34	20.34
	VHT20	27.03	27.03
	VHT40	20.50	20.50
	802.11ax (HE20)	27.15	27.15
	802.11ax (HE40)	20.63	20.63
5180 ~ 5240MHz	802.11a	27.98	-
	802.11n (HT20)	27.51	27.51
	802.11n (HT40)	26.50	26.50
	802.11ac (VHT20)	27.69	27.69
	802.11ac (VHT40)	26.72	26.72
	802.11ac (VHT80)	20.45	20.45
	802.11ax (HE20)	27.92	27.92
	802.11ax (HE40)	26.91	26.91
	802.11ax (HE80)	20.50	20.50
5745 ~ 5825MHz	802.11a	29.07	-
	802.11n (HT20)	28.53	28.53
	802.11n (HT40)	28.58	28.58
	802.11ac (VHT20)	28.71	28.71
	802.11ac (VHT40)	28.78	28.78
	802.11ac (VHT80)	25.75	25.75
	802.11ax (HE20)	28.94	28.94
	802.11ax (HE40)	28.98	28.98
	802.11ax (HE80)	25.84	25.84

註 3: 此待測設備搭配測試的天線，其資料如下：

No.	廠牌/製造商	型號	天線型式	接頭型式	增益 (dBi)	
					2.4G	5G
1	RF-link	RF21C05435A	Dipole	Soldering	1.81	-
2	RF-link	RF21C05434A	Dipole	Soldering	1.81	-
3	RF-link	U18T01S039N00139	Dipole	I-PEX	-	2.43
4	RF-link	U18T01S039N00140	Dipole	I-PEX	-	2.27

*上述天線的規格資訊由申請者聲明，實驗室不承擔任何責任。

註 4: 此產品搭配使用之配件如下：

*本案經申請者提供隨貨配件與實驗室提供測試配件併同檢驗。產品及隨貨配件之照片請參照 BV CPS 報告編號：BCWK-WTW-P21050819，測試配件之照片請參照 BV CPS 報告編號：BCWK-WTW-P21050819_SU，測試設置照片請參照 BV CPS 報告編號：BCWK-WTW-P21050819_TSup。

隨貨配件			
配件	廠牌/製造商	型號	規格
Adapter	律寶科技有限公司 (生產廠商：共進電子股份有限公司)	S18B22-120A150-CJ	I/P: 100-240Vac, 50-60Hz, 0.6A O/P: 12Vdc, 1.5A 1.47m cable without core attached on adapter
LAN Cable	常州遠歐電子有限公司	YO2021061901	1m non-shielded LAN cable without core

測試配件				
配件	廠牌/製造商	型號	規格	備註
LAN Cable	AMP NETCONNECT	RN11060081	1.5m non-shielded without core	實驗室提供
LAN Cable	AMP NETCONNECT	RN11060081	1.5m non-shielded without core	實驗室提供
LAN Cable	AMP NETCONNECT	RN11060081	1.5m non-shielded without core	實驗室提供
LAN Cable	AMP NETCONNECT	RN11060081	1.5m non-shielded without core	實驗室提供
LAN Cable	AMP NETCONNECT	RN11060081	7.0m non-shielded without core	實驗室提供

註 5: 此報告中，經過評估後以下列測試模式進行最終量測。

載波頻率	量測項目	發射	接收
2412 ~ 2462MHz			
場強輻射量測	1GHz 以上量測	802.11b: Ch 1, 6, 11 802.11g: Ch 1, 6, 11 802.11ax (HE20): Ch 1, 6, 11 802.11ax (HE40): Ch 3, 6, 9	802.11g: Ch 6
	其它不必要之訊號	802.11g: Ch 6	
電源線傳導干擾		802.11g: Ch 6	
5180 ~ 5240MHz, 5745 ~ 5825MHz			
場強輻射量測	1GHz 以上量測	802.11a: Ch 36, 40, 48, 149, 157, 165 802.11ax (HE20): Ch 36, 40, 48, 149, 157, 165 802.11ax (HE40): Ch 38, 46, 151, 159 802.11ax (HE80): Ch 42, 155	802.11a: Ch 149
	其它不必要之訊號	802.11a: Ch 149	
電源線傳導干擾		802.11a: Ch 149	

註 6: 此報告中傳輸模式，場強輻射量測及電源線傳導干擾量測之外的測試項目，以DSSS調變技術和OFDM調變技術分別進行測試並記錄最終量測結果於報告中。

註 7: 此待測設備，經預測試三個正交軸方位評估測試擺設方式：平躺、側放、垂直，其中以平躺為最大干擾值之位置，故各自以該最大干擾值之擺放方式進行最終量測，並將測試結果紀錄。

註 8: 2.4GHz & 5GHz technology can transmit at same time.

註 9: Spurious emission of the simultaneous operation 2.4GHz & 5GHz has been evaluated and no non-compliance was found.

註 10: Duty cycle of test signal.

2.4GHz Band:

802.11b: Duty cycle of test signal is $\geq 98\%$, duty factor is not required.


802.11g, 802.11ax (HE20), 802.11ax (HE40): Duty cycle of test signal is $< 98\%$, duty factor is required.

802.11b: Duty cycle = $8.395/8.480 = 0.990$

802.11g: Duty cycle = $1.385/1.465 = 0.945$, Duty factor = $10 * \log(1/0.945) = 0.24$

802.11ax (HE20): Duty cycle = $0.532/0.602 = 0.884$, Duty factor = $10 * \log(1/0.884) = 0.54$

802.11ax (HE40): Duty cycle = $0.287/0.355 = 0.808$, Duty factor = $10 * \log(1/0.808) = 0.92$

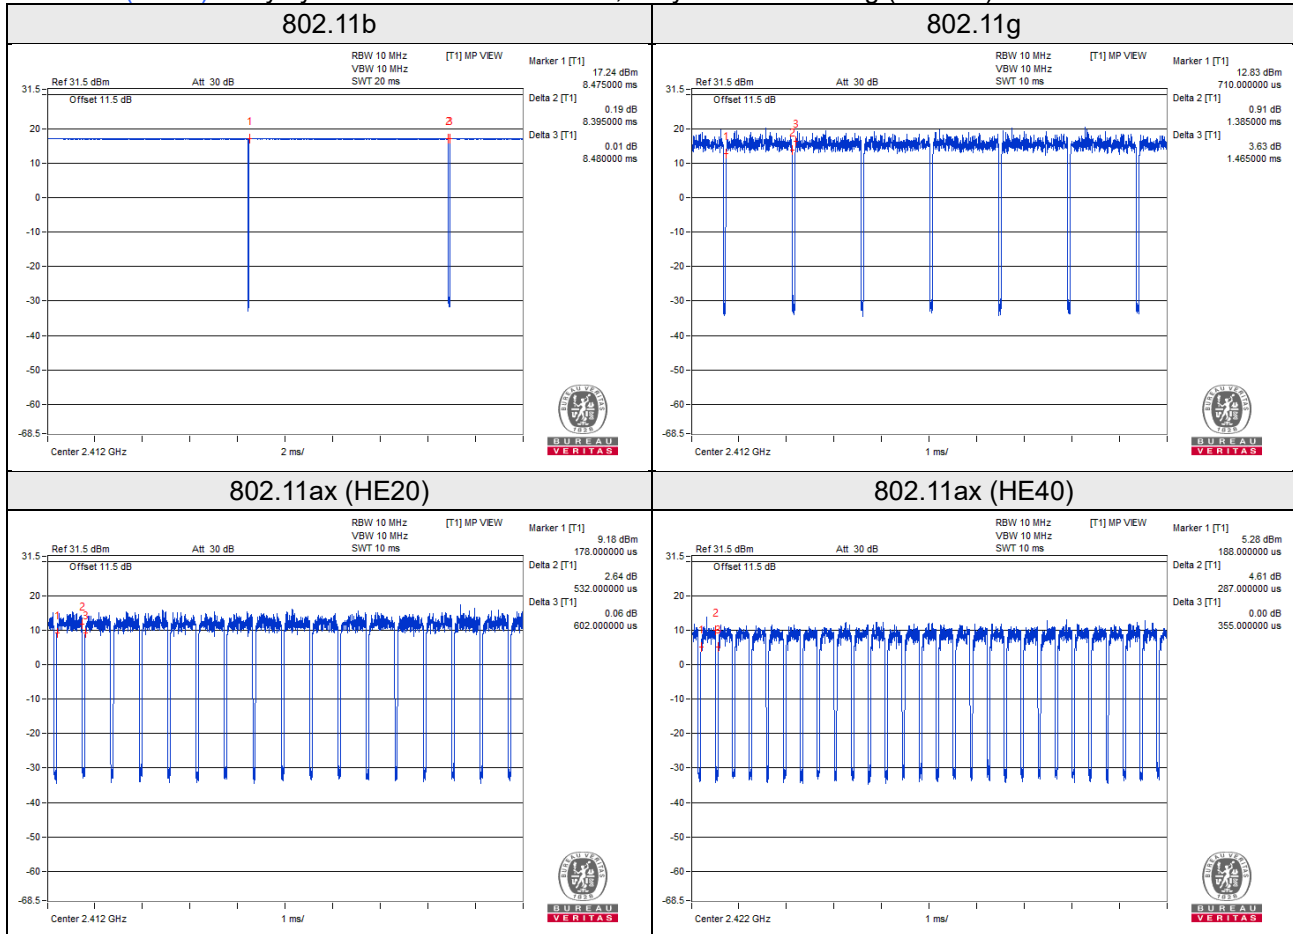

5GHz Band:


Duty cycle of test signal is < 98%, duty factor is required.

802.11a: Duty cycle = $1.393/1.461 = 0.953$, Duty factor = $10 * \log(1/0.953) = 0.21$

802.11ax (HE20): Duty cycle = $0.535/0.602 = 0.889$, Duty factor = $10 * \log(1/0.889) = 0.51$

802.11ax (HE40): Duty cycle = $0.293/0.359 = 0.816$, Duty factor = $10 * \log(1/0.816) = 0.88$

802.11ax (HE80): Duty cycle = $0.286/0.345 = 0.829$, Duty factor = $10 * \log(1/0.829) = 0.81$

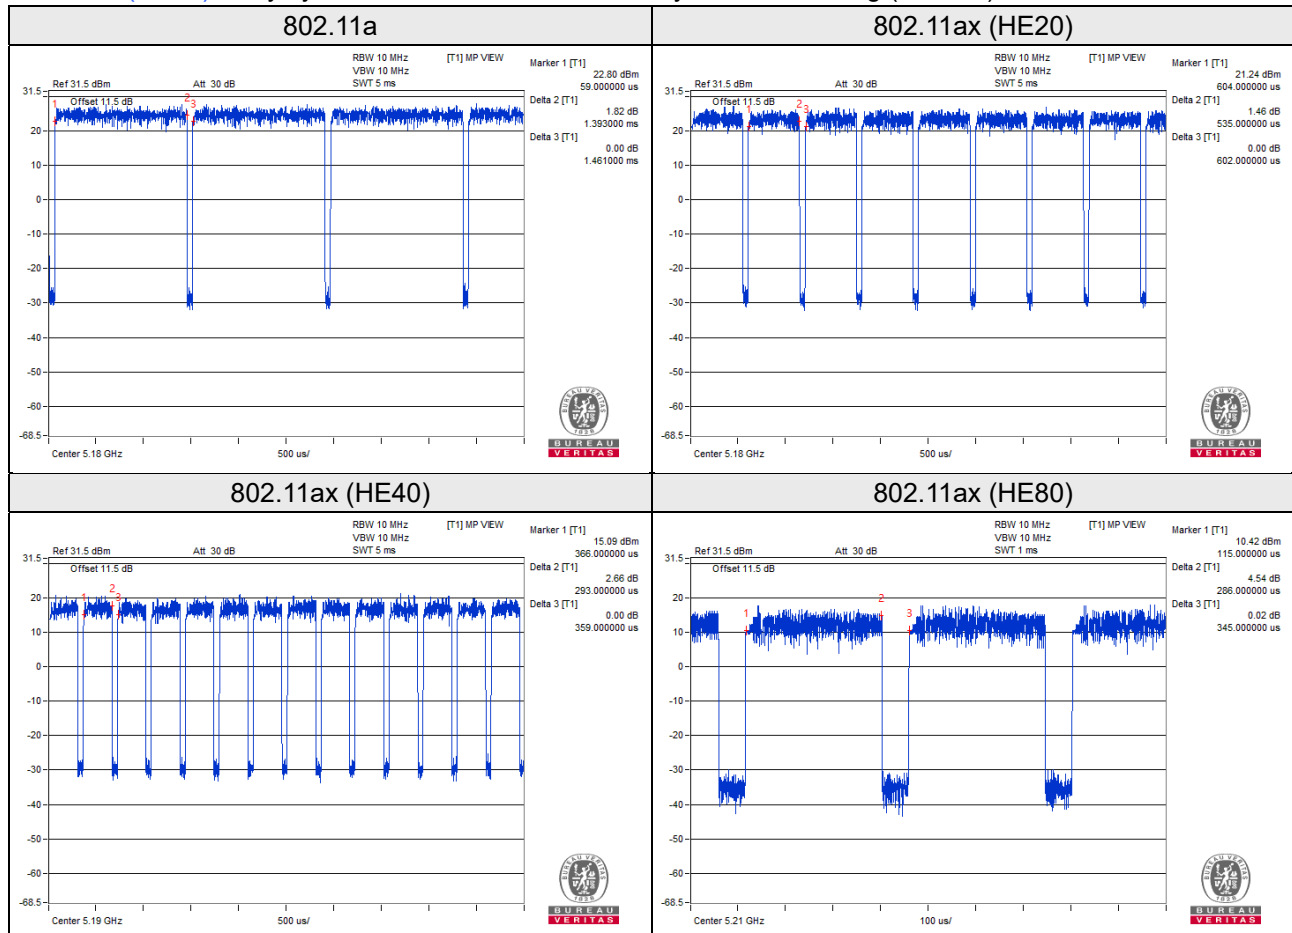

此裝置各頻道的中心頻率如下：

2.4 GHz 頻段：

802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20):

頻道	對應頻率 (MHz)	頻道	對應頻率 (MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437		

802.11n (HT40), VHT40, 802.11ax (HE40):

頻道	對應頻率 (MHz)	頻道	對應頻率 (MHz)
03	2422	07	2442
04	2427	08	2447
05	2432	09	2452
06	2437		

5GHz 頻段:

802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

頻道	對應頻率 (MHz)	頻道	對應頻率 (MHz)
36	5180 MHz	153	5765 MHz
40	5200 MHz	157	5785 MHz
44	5220 MHz	161	5805 MHz
48	5240 MHz	165	5825 MHz
149	5745 MHz		

802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

頻道	對應頻率 (MHz)	頻道	對應頻率 (MHz)
38	5190 MHz	151	5755 MHz
46	5230 MHz	159	5795 MHz

802.11ac (VHT80), 802.11ax (HE80):

頻道	對應頻率 (MHz)	頻道	對應頻率 (MHz)
42	5210 MHz	155	5775 MHz

詳細之規格請參考使用說明書，產品的照片請參照BV CPS報告編號：BCWK-WTW-P21050819。


2.2 輔助測試之週邊設備描述

待測設備於受測時均接上其所屬的配件或一般用途之相關設備；下列輔助設備或配件測試中所使用的配備，以形成一個代表待測物實際運作的受測系統。

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	E5410	1HC2XM1	FCC DoC Approved	實驗室提供
B.	Load	NA	NA	NA	NA	實驗室提供

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	LAN	1	7.0	N	0	RJ45, Cat5e 實驗室提供
2.	LAN	3	1.5	N	0	RJ45, Cat5e 實驗室提供
3.	LAN	1	1.0	N	0	RJ45, Cat5e 隨貨配件 (Brand: 常州遠歐電子有限公司, Model: YO2021061901)

2.3 測試架構圖

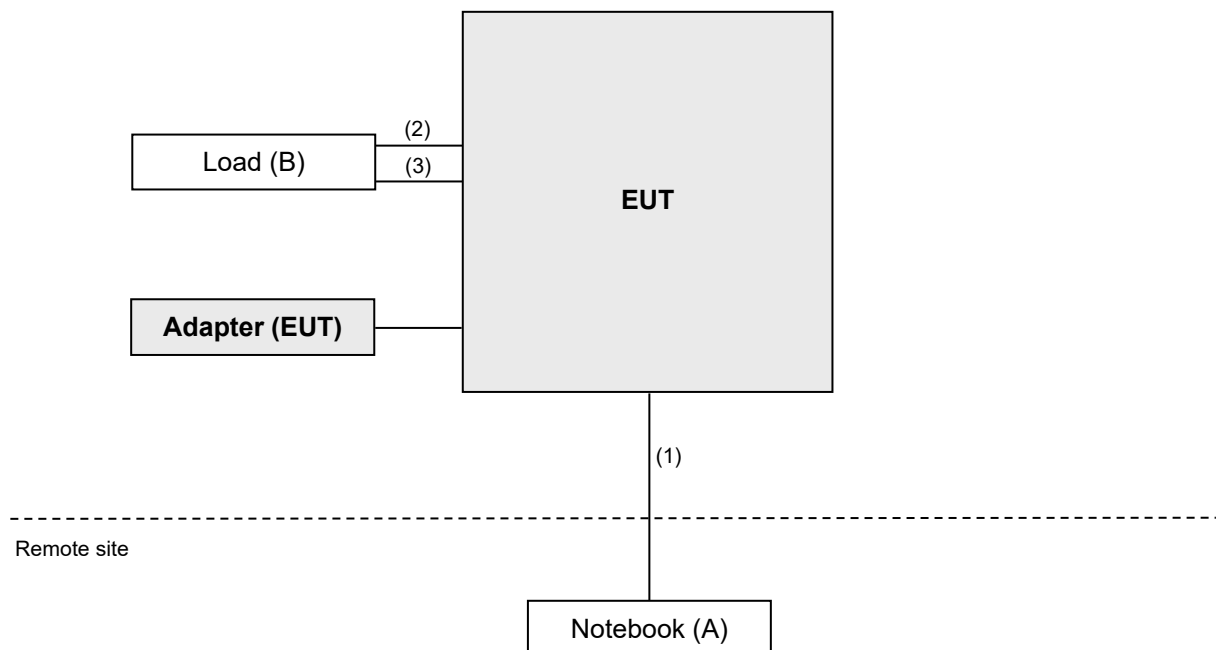

3 適用規範

3.1 規範要求和參考

(1) 傳導之規定

依據國家通訊傳播委員會低功率射頻器材技術規範之 3.3 節，電源傳導干擾之限制要求如下：

頻率(MHz)	傳導限制值 (dBuV)	
	準峰值(Quasi-peak)	平均值(Average)
0.15-0.5	66-56(註)	56-46(註)
0.5-5	56	46
5-30	60	50

(註)：隨頻率之對數遞減。

(2) 帶外發射之規定

(I) 操作於 2.4000~2.4835 GHz band:

依據國家通訊傳播委員會低功率射頻器材技術規範4.10.1.5節之要求，操作頻帶範圍外之任意100 kHz 內，發射機所產生的射頻功率相較於使用頻帶範圍中包含最高所需功率之100 kHz 內的射頻功率，其衰減值限制如下：(1) 輸出功率以附件二之峰值輸出功率方式測量者，至少須衰減20 dB，可使用射頻傳導或輻射方式測量。(2) 輸出功率以4.10.1.2(1)(C)之最大傳導輸出功率測量方式者，至少須衰減30 dB。

(II) 操作於 5.15 GHz~5.35 GHz 及 5.470 GHz ~5.725 GHz 頻段:

依據國家通訊傳播委員會低功率射頻器材技術規範5.7.4.1節之要求，帶外發射之有效等向輻射功率(EIRP) $\leq$ 27 dBm/MHz。

(III) 操作於 5.725 GHz~5.850 GHz 頻段:

依據國家通訊傳播委員會低功率射頻器材技術規範5.7.4.2節之要求，所有頻帶邊緣向外5 MHz 內頻率之發射，有效等向輻射功率(EIRP) $\leq$ 27 dBm/MHz~15.6 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣向外5 MHz~25 MHz，有效等向輻射功率35(EIRP) $\leq$ 15.6 dBm/MHz~10 dBm/MHz (以線性法計算對應之限制值)；所有頻帶邊緣外25 MHz~75 MHz，有效等向輻射功率(EIRP) $\leq$ 10 dBm/MHz~-27 dBm/MHz(以線性法計算對應之限制值)；所有頻帶邊緣外 $\geq$ 75 MHz 的頻率之發射，有效等向輻射功率(EIRP) $\leq$ -27 dBm/MHz；有關遮罩限制值詳圖1。

在5.725 GHz~5.850 GHz 頻段操作且天線增益大於10dBi 之設備於106 年3 月2日前得適用4.10.1.5 帶外發射限制；在5.725 GHz~5.850 GHz 頻段操作且天線增益小於等於10dBi之設備於107年3月2 日前得適用4.10.1.5帶外發射限制規定。

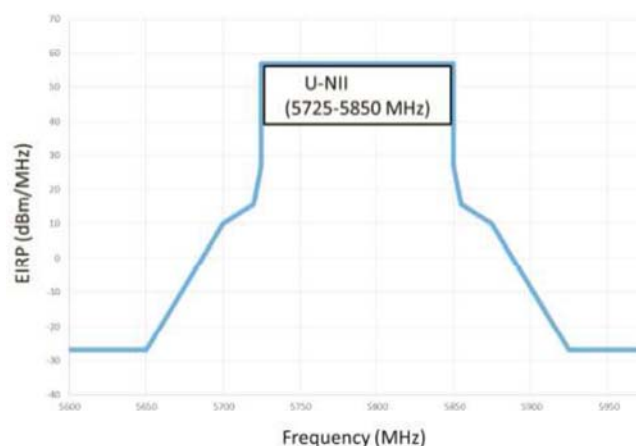


圖 1

在 1 GHz 以下不必要之發射，應符合 3.6 之規定。此外，落於 3.5 禁用頻段之輻射發射，應符合 3.6 之規定。

頻率(MHz)	電場強度(微伏特/公尺, uV/m)	測距(公尺)
$0.009 \leq f \leq 0.490$	$2,400/f(\text{kHz})$	300
$0.490 < f \leq 1.705$	$24,000/f(\text{kHz})$	30
$1.705 < f < 30$	30	30
$30 \leq f \leq 88$	100	3
$88 < f \leq 216$	150	3
$216 < f \leq 960$	200	3
$960 < f$	500	3

(3) 天線之規定

天線規格不受第 3.2 節規定之限制。

(4) 天線增益之要求

低功率發射機，依據國家通訊傳播委員會低功率射頻器材技術規範 4.10.1.3 節及 5.7.3 節之規定如下：

(I) 操作於 2400 MHz~2483.5 MHz 頻段：

(A) 進行固定式點對點操作時，其發射天線之方向性增益超過 6 dBi，每超過 3 dBi，最大傳導輸出功率限制值應降低 1 dB。

(B) 天線以多向波束發射方式(含同時發射或循序發射)將訊號導向多個接收機或接收機群組時，應符合下列規定：

(a) 非同時發射多向波束者，所有載波或頻道傳輸至所有天線陣列或陣列群之總和傳導輸出功率應符合 4.10.1.2 之功率限制值。如天線/天線陣列群之方向性增益超過 6 dBi，每超過 3 dBi，總和傳導輸出功率限制值應降低 1 dB。方向性增益值應計算如下：

(i) 方向性增益值 = $10\log(\text{天線陣列之單元數目}) + \text{各單元中最高之方向性增益值}$ 。

(ii) 天線陣列間之遮蔽效應或波束干涉損失能充分佐證時，方向性增益得低於(i)計算數值。

(b) 同時發射多向波束於相同或不同頻道者，其每一波束功率應符合(a)之功率限制值。如發射波束有重疊現象，功率應降低，以確保總和傳導輸出功率符合(a)之限制值。同時發射的所有波束總和傳導輸出功率不大於(a)總和傳導輸出功率限制值加 8 dB。方向性增益值計算同(a)。

(c) 發射機之天線具備單向波束功能者，應符合(1)(A)及(3)後段之規定。

除(A)及(B)外，使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率限制值。

(II) 操作於 5.15 GHz~5.25 GHz 頻段：

(A) 供戶外操作使用：使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。在水平面仰角超過 30 度時，其最大 EIRP 應小於或等於 21 dBm。

(B) 供室內操作使用：使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

(C) 供固定式點對點操作使用：使用超過 23 dBi 方向增益之指向性天線時，應依超過 23 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。固定式點對點操作，不包括點對多點系統、全方向性應用及多台共站發射機傳送相同資訊。

(D) 供用戶端裝置(Client Device)操作使用：使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

(III) 操作於 5.25 GHz~5.35 GHz 與 5.470 GHz ~5.725 GHz 頻段：

使用超過 6 dBi 方向增益之發射天線時，應依超過 6 dBi 天線方向增益的 dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。

- (IV) 操作於 5.725 GHz~5.850 GHz 頻段:
- (A) 供固定式點對點操作時，使用方向增益超過6 dBi 之發射天線，可不需對應減少發射器之傳導輸出功率限制值。
- (B) 除(A)外，使用超過6 dBi 方向增益之發射天線時，應依超過6 dBi 天線方向增益的dBi 總量，等量減少最大傳導輸出功率及最大功率頻譜密度。
- (5) 6dB 頻寬之要求
- (I) 操作於 2400 MHz~2483.5 MHz 頻段：
- 對使用數位調變技術(digital modulation techniques)系統之低功率發射機，依據國家通訊傳播委員會低功率射頻器材技術規範4.10.1.6節之規定，6dB頻寬至少應有500kHz。
- (II) 操作於 5.725 GHz~5.850 GHz 頻段：
- 依據國家通訊傳播委員會低功率射頻器材技術規範5.7.5節之規定，其6dB頻寬至少應有500kHz。
- (6) 傳導輸出功率之要求
- (I) 操作於 2.4000~2.4835 GHz band:
- 依據國家通訊傳播委員會低功率射頻器材技術規範4.10.1.2節之規定：
- 數位調變技術系統：1 W(含)以下。
- (II) 操作於 5.15 GHz~5.25 GHz 頻段：
- 依據國家通訊傳播委員會低功率射頻器材技術規範5.7.3.1節之要求：
- (A) 供戶外操作使用/供室內操作使用/供固定式點對點操作使用：最大傳導輸出功率應小於或等於1 W。
- (B) 供用戶端裝置(Client Device)操作使用：最大傳導輸出功率應小於或等於250 mW。
- (III) 操作於 5.25 GHz~5.35 GHz 及 5.470 GHz ~5.725 GHz 頻段：
- 依據國家通訊傳播委員會低功率射頻器材技術規範5.7.3.2節之規定，最大傳導輸出功率應小於或等於250 mW或11dBm+10log B (B是26 dB發射頻寬，單位MHz)之較小者。
- (IV) 操作於 5.725 GHz~5.850 GHz 頻段：
- 依據國家通訊傳播委員會低功率射頻器材技術規範5.7.3.3節之規定，最大傳導輸出功率應小於或等於1 W。
- (7) 功率頻譜密度之要求
- (I) 操作於 2.4000~2.4835 GHz band:
- 依據國家通訊傳播委員會低功率射頻器材技術規範4.10.1.6節之規定，在使用頻率範圍之任一3 kHz 頻寬內，由發射機傳導至天線之功率頻譜密度在任意傳輸期間內，皆小於或等於8 毫分貝(dBm)，且應依4.10.1.3 之方式降低功率頻譜密度限制值。
- (II) 操作於 5.15 GHz~5.25 GHz 頻段：
- 依據國家通訊傳播委員會低功率射頻器材技術規範5.7.3.1節之要求：
- (A) 供戶外操作使用/供室內操作使用/供固定式點對點操作使用：在任何1 MHz 頻帶中最大功率頻譜密度應小於或等於17 dBm。
- (B) 供用戶端裝置(Client Device)操作使用：在任何1 MHz 頻帶中最大功率頻譜密度應小於或等於11 dBm。
- (III) 操作於 5.25 GHz~5.35 GHz 及 5.470 GHz ~5.725 GHz 頻段：
- 依據國家通訊傳播委員會低功率射頻器材技術規範5.7.3.2節之規定，最大功率頻譜密度在任何1 MHz 頻帶中應小於或等於11 dBm。
- (IV) 操作於 5.725 GHz~5.850 GHz 頻段：
- 依據國家通訊傳播委員會低功率射頻器材技術規範5.7.3.3節之規定，在任何500 kHz 頻帶中最大功率頻譜密度應小於或等於30 dBm。

(8) 發射功率控制(TPC)及動態頻率選擇(DFS)之要求

依據國家通訊傳播委員會低功率射頻器材技術規範 5.7.7.1 及 5.7.7.2 節之規定。

發射功率控制(TPC)：操作於 5.25 GHz~5.35 GHz 與 5.470 GHz~5.725 GHz 頻段的設備，應具備發射功率控制功能。設備必須至少具有 6 dB 低於平均 EIRP 30 dBm 的能力。EIRP 低於 500 mW 之系統不須具備 TPC 功能。

動態頻率選擇(DFS)：操作於 5.25 GHz~5.35 GHz 與 5.470 GHz~5.725 GHz 頻段之設備應具備動態頻率選擇雷達偵測功能並啟動之，以完整偵測使用頻帶內之雷達訊號，避免與雷達系統同頻道操作。相關規定如下：

(1) 最低動態頻率選擇的偵測門檻

(A) 最大EIRP 為200 mW~1 W之設備，其最低動態頻率選擇的偵測門檻值為-64dBm。

(B) 最大EIRP 低於200 mW，且功率頻譜密度小於10 dBm/MHz 之設備，其最低動態頻率選擇的偵測門檻值為-62 dBm。

(C) 最大EIRP 低於200 mW，且功率頻譜密度大於或等於10 dBm/MHz 之設備，其最低動態頻率選擇的偵測門檻值為-64 dBm。

(D) 此偵測門檻值為1 微秒內之平均接收功率，並以0 dBi 天線為參考基準。頻道初始設定得由系統隨機選取或使用使用者手動選取。

(2) 操作模式：動態頻率選擇之規定適用於以下之操作模式：

(A) 頻道可用性檢查時間之規定，適用於主控運作模式。

(B) 頻道移動時間之規定，適用於主控及受控運作模式。

(3) 頻道可用性檢查時間：設備必須檢查其可在某一頻道上起始傳送之前是否有雷達系統已經操作在該頻道上，以及何時其必須移動到另一新的頻道，在60 秒內若沒有偵測到功率位準大過上述之干擾門檻值的雷達訊號時，設備才可開始使用該頻道。

(4) 頻道移動時間：在偵測到雷達的存在後，所有在該操作頻道上的所有傳輸須在10秒內停止，在偵測到雷達訊號後，該期間內的傳輸應維持最多200 毫秒的正常通訊。另外，間歇性的管理與控制訊號可在剩餘的時間中傳送，以便撤離該操作頻道。

(5) 不可佔用期間：某一頻道已被頻道可用性檢查或"服務中"監視顯示含有雷達系統，至少須有30 分鐘的不可佔用期間。不可佔用期間起始於偵測到雷達系統的當時。

(9) 無線資訊傳輸設備必須擁有安全功能之要求：

依據國家通訊傳播委員會低功率射頻器材技術規範 5.7.7.3 節之規定，無線資訊傳輸設備必須擁有安全功能，以保護未經授權之一方更改軟體。製造商應提出符合本節規定之相關證明文件或符合性聲明。

(10) 依據國家通訊傳播委員會低功率射頻器材技術規範 5.7.7.4 節之規定，製造商必須在操作於 U-NII 頻段上之數位調變系統中提供安全功能，使第三方團體無法重寫程式，使其操作於非經認證之設定。該軟體必須避免發射機操作於非經認證之頻率、輸出功率、調變形式或其他射頻參數。製造商可使用私有網路，只有經授權的用戶能下載軟體、進行軟體式電子簽章或硬體式的韌體更新，新的軟體可以被合法的載入到設備中，同時又能符合上述事項，並於應用程式中描述設備授權的方法。

(11) 依據國家通訊傳播委員會低功率射頻器材技術規範 5.7.7.5 節之規定，製造商必須確保 DFS 功能無法被無線資訊傳輸設備之操作者取消。

(12) 電波暴露量之評估

依據國家通訊傳播委員會低功率射頻器材技術規範 6.20.2 節之規定，若受測物於正常操作模式下，其發射機距離人體 20 公分以上者，可測試最大暴露允許值(Maximum Permissible Exposure, MPE)以證明其符電波暴露量之要求。

限制值如下：

(1) 職業性/可控制之暴露

頻率範圍 (MHz)	電場強度 (V/m)	磁場強度 (A/m)	功率密度 (mW/cm ²)	平均時間 (minutes)
0.3 - 3.0	614	1.63	*100	6
3 - 30	1842/f	4.89/f	*900/f ²	6
30 - 300	61.4	0.163	1.0	6
300 - 1,500	---	---	f/300	6
1,500 - 100,000	---	---	5.0	6

註 1：標記*表平面波等效功率密度。

註 2：f 表測試頻率，單位：百萬赫(MHz)。

(2) 一般人/不可控制之暴露

頻率範圍 (MHz)	電場強度 (V/m)	磁場強度 (A/m)	功率密度 (mW/cm ²)	平均時間 (minutes)
0.3 - 1.34	614	1.63	*100	30
1.34 - 30	824/f	2.19/f	*180/f ²	30
30 - 300	27.5	0.073	0.2	30
300 - 1,500	---	---	f/1500	30
1,500 - 100,000	---	---	1.0	30

註 1：標記*表平面波等效功率密度。

註 2：f 表測試頻率，單位：百萬赫(MHz)。

參考國際標準指南

KDB 558074

KDB 662911

KDB 789033

3.2 限制使用之頻帶

除本規範另有規定外，任何低功率射頻器材之主波皆不得使用下表所列各頻段之頻率；低功率射頻器材落於下表所列頻段之混附發射，其電場強度必須符合 3.6 之限制規定。

頻率(兆赫)	頻率(兆赫)	頻率(兆赫)
0.090~0.110	240.00~285.00	3332.0~3339.0
0.490~0.510	322.00~335.40	3345.8~3358.0
2.172~2.198	399.90~410.00	3500.0~4400.0
3.013~3.033	485.00~510.00	4500.0~5250.0
4.115~4.198	608.00~614.00	5350.0~5460.0
5.670~5.690	703.00~748.00	7250.0~7750.0
6.200~6.300	758.00~803.00	8025.0~8500.0
8.230~8.400	825.00~915.00	9000.0~9200.0
12.265~12.600	930.00~1240.0	9300.0~9500.0
13.340~13.430	1300.0~1427.0	10600~12700
14.965~15.020	1435.0~1626.5	13250~13400
16.700~16.755	1660.0~1785.0	14470~14500
19.965~20.020	1805.0~1880.0	15350~16200
25.500~25.700	1885.0~1900.0	17700~21400
37.475~38.275	1905.0~1985.0	22010~23120
73.500~75.400	2010.0~2025.0	23600~24000
108.00~138.00	2110.0~2170.0	31200~31800
149.90~150.05	2200.0~2300.0	36430~36500
156.70~156.90	2310.0~2390.0	38600 以上
162.01~167.17	2483.5~2900.0	
167.72~173.20	3260.0~3267.0	

2.4GHz 頻段測試紀錄結果

4 帶外發射之量測

4.1 適用標準

請見本報告3.1節第2項(I)的規定。

4.2 量測方法

在電波暗室，將待測物置於0.8米高的非金屬桌面，使其操作在工作狀態。接收天線置於3米距離。桌面要360度旋轉，另外接收天線從離地1米至4米升降變化，以找出最大的輻射電場強度，接收天線分別置於水平、垂直極化各執行測試一次。

備註: 對於 1GHz 以上場強輻射的測試，待測物則置於1.5米高的非金屬桌面。

4.3 量測儀器


儀器名稱 (廠牌/製造商)	型號	序號	校正日期	下次校正日期
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Dec. 31, 2020	Dec. 30, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Sep. 16, 2020	Sep. 15, 2021
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Nov. 03, 2020	Nov. 02, 2021
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-1170	Nov. 22, 2020	Nov. 21, 2021
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 22, 2020	Nov. 21, 2021
Loop Antenna EMCI	EM-6879	269	Sep. 17, 2020	Sep. 16, 2021
Preamplifier Agilent (Below 1GHz)	8447D	2944A10631	Jun. 05, 2021	Jun. 04, 2022
Preamplifier KEYSIGHT (Above 1GHz)	83017A	MY53270295	Jun. 05, 2021	Jun. 04, 2022
RF Coaxial Cable WOKEN With 5dB PAD	8D-FB	Cable-CH4-01	Aug. 16, 2020	Aug. 15, 2021
RF Coaxial Cable EMCI	EMC102-KM-KM-3 000	150929	Aug. 16, 2020	Aug. 15, 2021
RF Coaxial Cable EMCI	EMC102-KM-KM-6 00	150928	Aug. 16, 2020	Aug. 15, 2021
RF signal cable HUBER+SUHNER	SUCOFLEX 104	MY 13380+295012/04	Jun. 05, 2021	Jun. 04, 2022
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH4-03 (250724)	Jun. 05, 2021	Jun. 04, 2022
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021703	NA	NA
Turn Table BV ADT	TT100	TT93021703	NA	NA
Turn Table Controller BV ADT	SC100	SC93021703	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Pre-amplifier (18GHz-40GHz) EMC	EMC184045B	980175	Sep. 04, 2020	Sep. 03, 2021

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 4.
3. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


Measurement	Frequency	Uncertainty
Radiated emissions	9kHz ~ 30MHz	3.04 dB
	30MHz ~ 200MHz	3.63 dB
	200MHz ~ 1000MHz	3.64 dB
	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

4.4 測試配置


<Frequency Range below 30MHz>

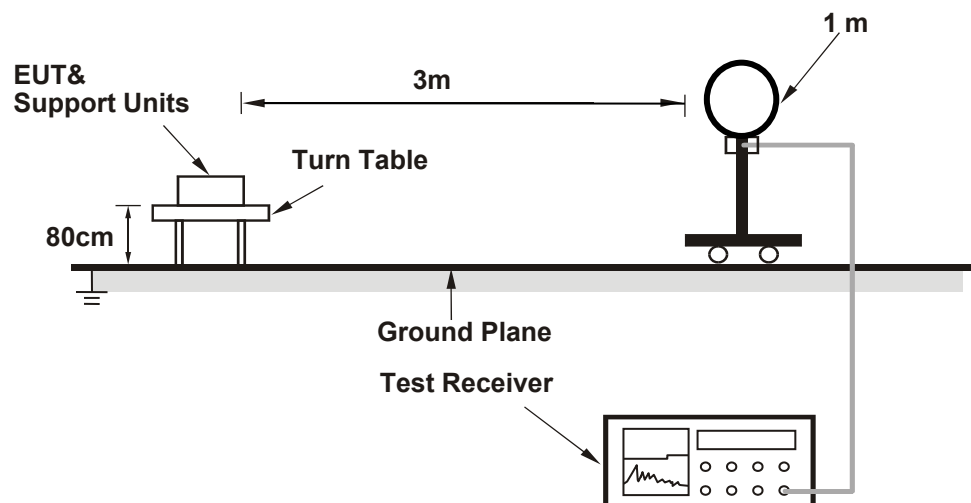

<Frequency Range below 1GHz>

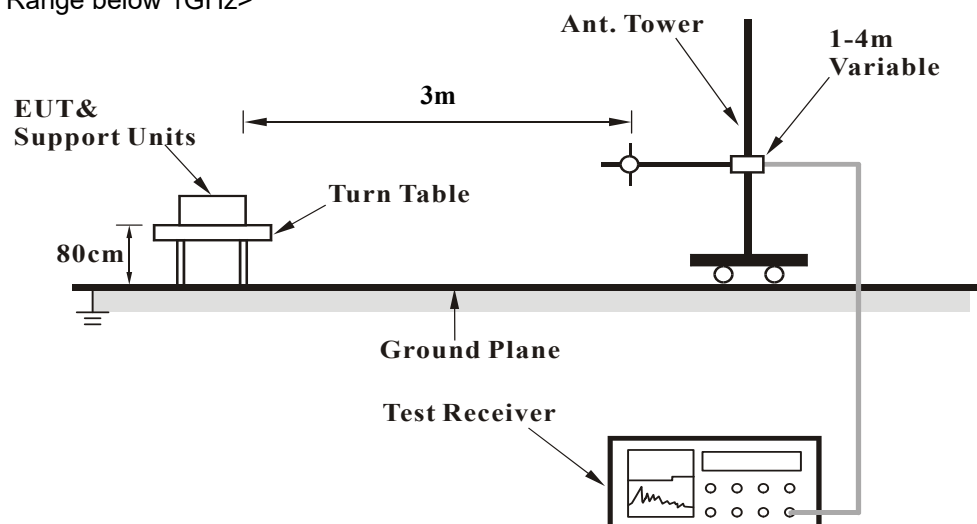

<Frequency Range above 1GHz>

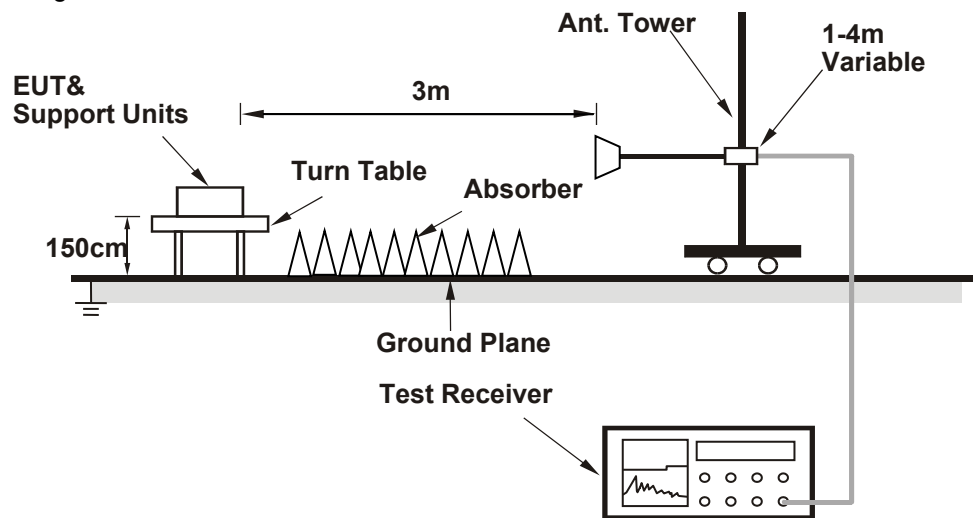

4.5 場強度之計算

場強之計算公式如下：

結果值Emission level (dBuV/m)=機器讀值 Raw Value (dBuV) +校正因子Correction Factor (dB/m)

餘裕度Margin(dB)= 結果值Emission level (dBuV/m)-限制值Limit value (dBuV/m)

量測結果請見下頁。

4.6 量測結果


4.6.1 發射諧波

操作模式：	發射 802.11b	調變技術：	DSSS-MIMO
基本波頻率：	CH 1：2412 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 19 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.5 PK	74.0	-13.5	2.01 H	171	26.4	34.1
2	2390.00	48.0 AV	54.0	-6.0	2.01 H	171	13.9	34.1
3	*2412.00	107.4 PK			2.01 H	171	73.3	34.1
4	*2412.00	105.2 AV			2.01 H	171	71.1	34.1
5	4824.00	52.9 PK	74.0	-21.1	2.05 H	210	39.2	13.7
6	4824.00	42.7 AV	54.0	-11.3	2.05 H	210	29.0	13.7
7	#7236.00	-	-	-	-	-	-	-
8	#9648.00	-	-	-	-	-	-	-
9	12060.00	-	-	-	-	-	-	-
10	14472.00	-	-	-	-	-	-	-
11	#16884.00	-	-	-	-	-	-	-
12	19296.00	-	-	-	-	-	-	-
13	#21708.00	-	-	-	-	-	-	-
14	#24120.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

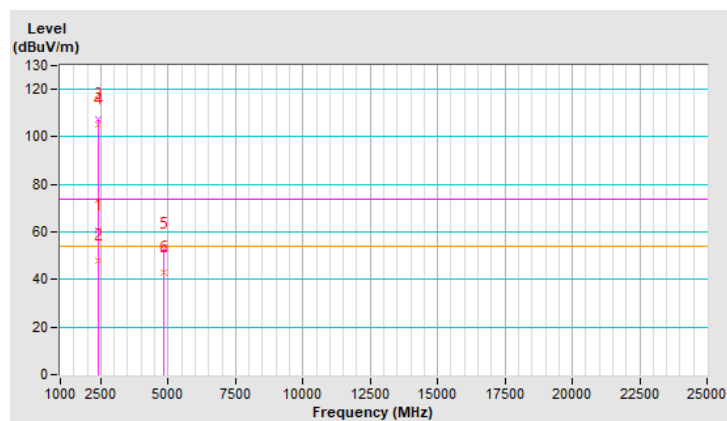


操作模式：	發射 802.11b	調變技術：	DSSS-MIMO
基本波頻率：	CH 1：2412 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.1 PK	74.0	-11.9	2.01 V	25	28.0	34.1
2	2390.00	52.4 AV	54.0	-1.6	2.01 V	25	18.3	34.1
3	*2412.00	117.1 PK			2.01 V	25	83.0	34.1
4	*2412.00	114.8 AV			2.01 V	25	80.7	34.1
5	4824.00	55.0 PK	74.0	-19.0	2.06 V	251	41.3	13.7
6	4824.00	51.8 AV	54.0	-2.2	2.06 V	251	38.1	13.7
7	#7236.00	-	-	-	-	-	-	-
8	#9648.00	-	-	-	-	-	-	-
9	12060.00	-	-	-	-	-	-	-
10	14472.00	-	-	-	-	-	-	-
11	#16884.00	-	-	-	-	-	-	-
12	19296.00	-	-	-	-	-	-	-
13	#21708.00	-	-	-	-	-	-	-
14	#24120.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

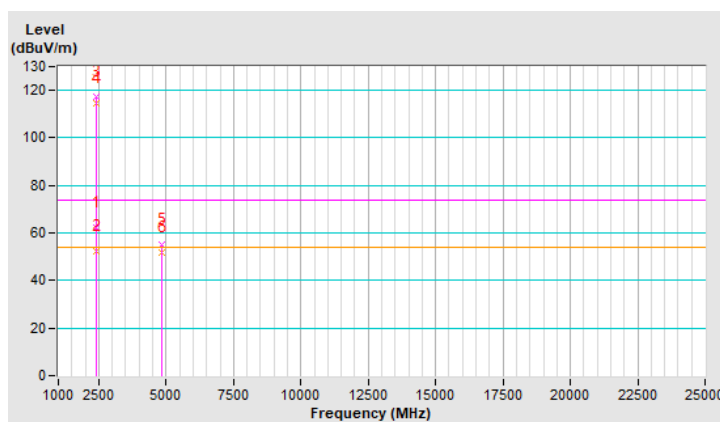


操作模式：	發射 802.11b	調變技術：	DSSS-MIMO
基本波頻率：	CH 6：2437 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 19 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	106.7 PK			1.96 H	171	72.6	34.1
2	*2437.00	105.1 AV			1.96 H	171	71.0	34.1
3	4824.00	52.7 PK	74.0	-21.3	1.45 H	212	39.0	13.7
4	4824.00	44.8 AV	54.0	-9.2	1.45 H	212	31.1	13.7
5	4874.00	-	-	-	-	-	-	-
6	7311.00	-	-	-	-	-	-	-
7	#9748.00	-	-	-	-	-	-	-
8	12185.00	-	-	-	-	-	-	-
9	#14622.00	-	-	-	-	-	-	-
10	#17059.00	-	-	-	-	-	-	-
11	19496.00	-	-	-	-	-	-	-
12	#21933.00	-	-	-	-	-	-	-
13	#24370.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

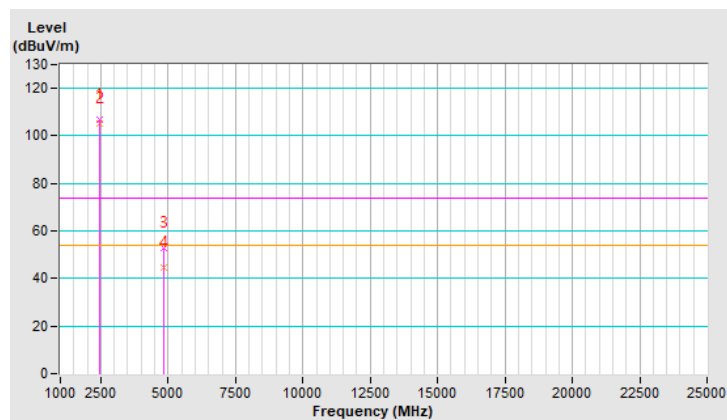


操作模式：	發射 802.11b	調變技術：	DSSS-MIMO
基本波頻率：	CH 6：2437 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	118.9 PK			1.10 V	182	84.8	34.1
2	*2437.00	116.6 AV			1.10 V	182	82.5	34.1
3	4874.00	56.3 PK	74.0	-17.7	2.17 V	248	42.6	13.7
4	4874.00	51.9 AV	54.0	-2.1	2.17 V	248	38.2	13.7
5	7311.00	-	-	-	-	-	-	-
6	#9748.00	-	-	-	-	-	-	-
7	12185.00	-	-	-	-	-	-	-
8	#14622.00	-	-	-	-	-	-	-
9	#17059.00	-	-	-	-	-	-	-
10	19496.00	-	-	-	-	-	-	-
11	#21933.00	-	-	-	-	-	-	-
12	#24370.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

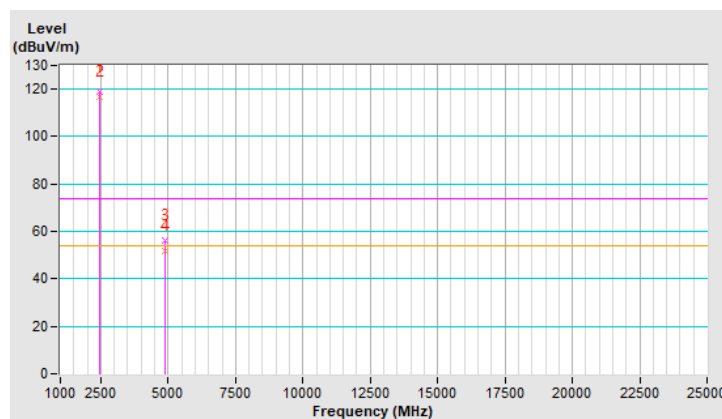


操作模式：	發射 802.11b	調變技術：	DSSS-MIMO
基本波頻率：	CH 11：2462 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 19 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.3 PK			1.75 H	168	73.2	34.1
2	*2462.00	105.1 AV			1.75 H	168	71.0	34.1
3	2483.50	61.3 PK	74.0	-12.7	1.75 H	168	27.2	34.1
4	2483.50	48.5 AV	54.0	-5.5	1.75 H	168	14.4	34.1
5	4924.00	52.1 PK	74.0	-21.9	1.52 H	208	38.5	13.6
6	4924.00	44.0 AV	54.0	-10.0	1.52 H	208	30.4	13.6
7	7386.00	-	-	-	-	-	-	-
8	#9848.00	-	-	-	-	-	-	-
9	12310.00	-	-	-	-	-	-	-
10	#14772.00	-	-	-	-	-	-	-
11	#17234.00	-	-	-	-	-	-	-
12	19696.00	-	-	-	-	-	-	-
13	22158.00	-	-	-	-	-	-	-
14	#24620.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

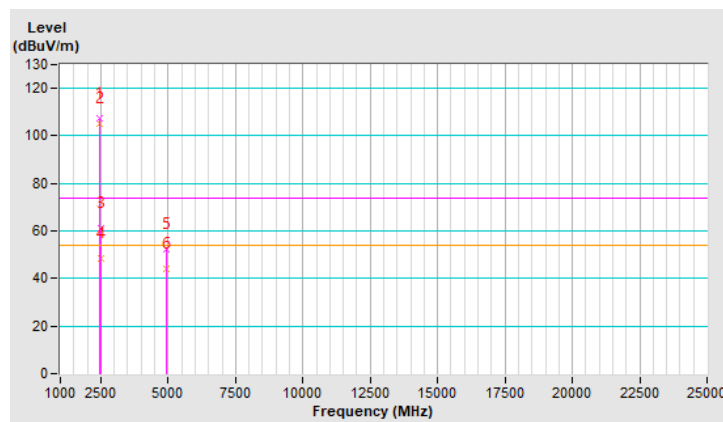


操作模式：	發射 802.11b	調變技術：	DSSS-MIMO
基本波頻率：	CH 11：2462 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10Hz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	118.3 PK			1.55 V	179	84.2	34.1
2	*2462.00	116.0 AV			1.55 V	179	81.9	34.1
3	2483.50	62.9 PK	74.0	-11.1	1.55 V	179	28.8	34.1
4	2483.50	52.6 AV	54.0	-1.4	1.55 V	179	18.5	34.1
5	4924.00	54.2 PK	74.0	-19.8	2.17 V	247	40.6	13.6
6	4924.00	50.8 AV	54.0	-3.2	2.17 V	247	37.2	13.6
7	7386.00	-	-	-	-	-	-	-
8	#9848.00	-	-	-	-	-	-	-
9	12310.00	-	-	-	-	-	-	-
10	#14772.00	-	-	-	-	-	-	-
11	#17234.00	-	-	-	-	-	-	-
12	19696.00	-	-	-	-	-	-	-
13	22158.00	-	-	-	-	-	-	-
14	#24620.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

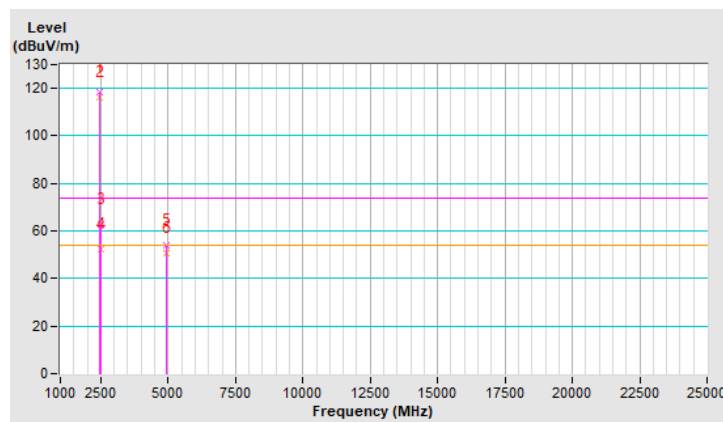


操作模式：	發射 802.11g	調變技術：	OFDM-MIMO
基本波頻率：	CH 1：2412 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 19 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.6 PK	74.0	-13.4	1.24 H	173	26.5	34.1
2	2390.00	49.5 AV	54.0	-4.5	1.24 H	173	15.4	34.1
3	*2412.00	108.8 PK			1.24 H	173	74.7	34.1
4	*2412.00	98.9 AV			1.24 H	173	64.8	34.1
5	4824.00	50.9 PK	74.0	-23.1	1.64 H	223	37.2	13.7
6	4824.00	39.0 AV	54.0	-15.0	1.64 H	223	25.3	13.7
7	#7236.00	-	-	-	-	-	-	-
8	#9648.00	-	-	-	-	-	-	-
9	12060.00	-	-	-	-	-	-	-
10	14472.00	-	-	-	-	-	-	-
11	#16884.00	-	-	-	-	-	-	-
12	19296.00	-	-	-	-	-	-	-
13	#21708.00	-	-	-	-	-	-	-
14	#24120.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

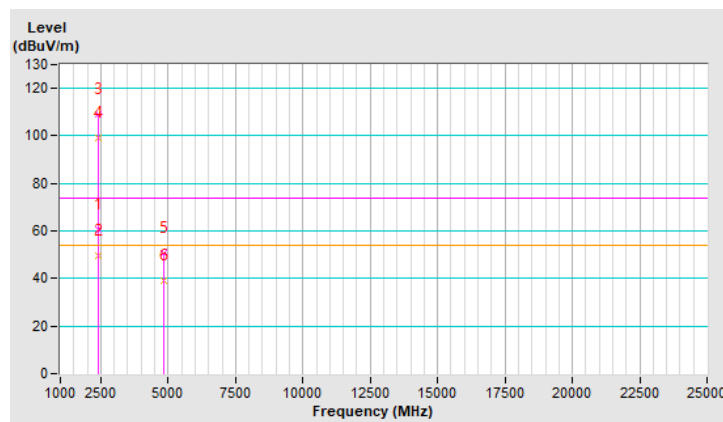


操作模式：	發射 802.11g	調變技術：	OFDM-MIMO
基本波頻率：	CH 1：2412 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.9 PK	74.0	-8.1	1.72 V	175	31.8	34.1
2	2390.00	52.8 AV	54.0	-1.2	1.72 V	175	18.7	34.1
3	*2412.00	117.1 PK			1.72 V	175	83.0	34.1
4	*2412.00	107.9 AV			1.72 V	175	73.8	34.1
5	4824.00	51.6 PK	74.0	-22.4	2.00 V	246	37.9	13.7
6	4824.00	39.3 AV	54.0	-14.7	2.00 V	246	25.6	13.7
7	#7236.00	-	-	-	-	-	-	-
8	#9648.00	-	-	-	-	-	-	-
9	12060.00	-	-	-	-	-	-	-
10	14472.00	-	-	-	-	-	-	-
11	#16884.00	-	-	-	-	-	-	-
12	19296.00	-	-	-	-	-	-	-
13	#21708.00	-	-	-	-	-	-	-
14	#24120.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

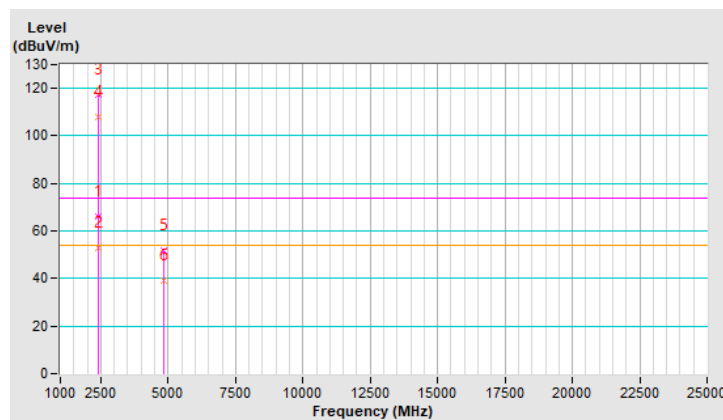


操作模式：	發射 802.11g	調變技術：	OFDM-MIMO
基本波頻率：	CH 6：2437 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 19 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.5 PK	74.0	-13.5	1.07 H	177	26.4	34.1
2	2390.00	48.6 AV	54.0	-5.4	1.07 H	177	14.5	34.1
3	*2437.00	114.5 PK			1.07 H	177	80.4	34.1
4	*2437.00	104.2 AV			1.07 H	177	70.1	34.1
5	4874.00	51.9 PK	74.0	-22.1	1.62 H	215	38.2	13.7
6	4874.00	41.3 AV	54.0	-12.7	1.62 H	215	27.6	13.7
7	7311.00	-	-	-	-	-	-	-
8	#9748.00	-	-	-	-	-	-	-
9	12185.00	-	-	-	-	-	-	-
10	#14622.00	-	-	-	-	-	-	-
11	#17059.00	-	-	-	-	-	-	-
12	19496.00	-	-	-	-	-	-	-
13	#21933.00	-	-	-	-	-	-	-
14	#24370.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

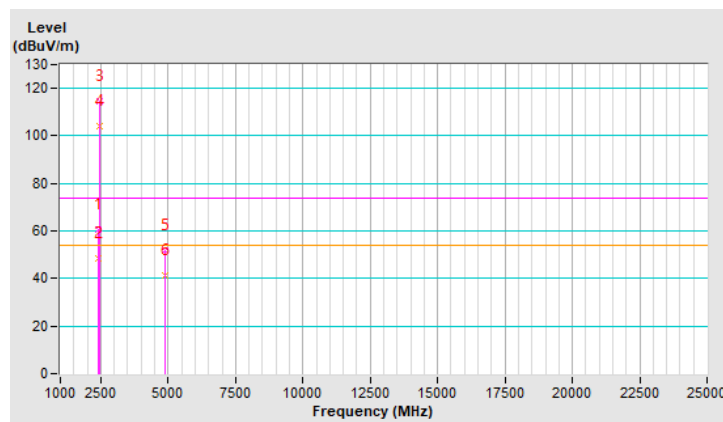


操作模式：	發射 802.11g	調變技術：	OFDM-MIMO
基本波頻率：	CH 6：2437 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.1 PK	74.0	-7.9	1.56 V	171	32.0	34.1
2	2390.00	52.4 AV	54.0	-1.6	1.56 V	171	18.3	34.1
3	*2437.00	124.1 PK			1.56 V	171	90.0	34.1
4	*2437.00	114.3 AV			1.56 V	171	80.2	34.1
5	4824.00	52.6 PK	74.0	-21.4	2.04 V	265	38.9	13.7
6	4824.00	40.9 AV	54.0	-13.1	2.04 V	265	27.2	13.7
7	4874.00	-	-	-	-	-	-	-
8	7311.00	-	-	-	-	-	-	-
9	#9748.00	-	-	-	-	-	-	-
10	12185.00	-	-	-	-	-	-	-
11	#14622.00	-	-	-	-	-	-	-
12	#17059.00	-	-	-	-	-	-	-
13	19496.00	-	-	-	-	-	-	-
14	#21933.00	-	-	-	-	-	-	-
15	#24370.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

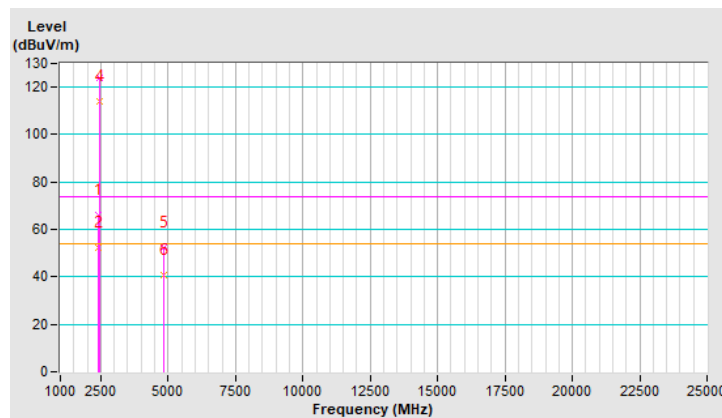


操作模式：	發射 802.11g	調變技術：	OFDM-MIMO
基本波頻率：	CH 11：2462 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 19 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.0 PK			1.10 H	181	71.9	34.1
2	*2462.00	96.2 AV			1.10 H	181	62.1	34.1
3	2483.50	61.2 PK	74.0	-12.8	1.10 H	181	27.1	34.1
4	2483.50	49.0 AV	54.0	-5.0	1.10 H	181	14.9	34.1
5	4924.00	50.9 PK	74.0	-23.1	1.72 H	238	37.3	13.6
6	4924.00	39.4 AV	54.0	-14.6	1.72 H	238	25.8	13.6
7	7386.00	-	-	-	-	-	-	-
8	#9848.00	-	-	-	-	-	-	-
9	12310.00	-	-	-	-	-	-	-
10	#14772.00	-	-	-	-	-	-	-
11	#17234.00	-	-	-	-	-	-	-
12	19696.00	-	-	-	-	-	-	-
13	22158.00	-	-	-	-	-	-	-
14	#24620.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

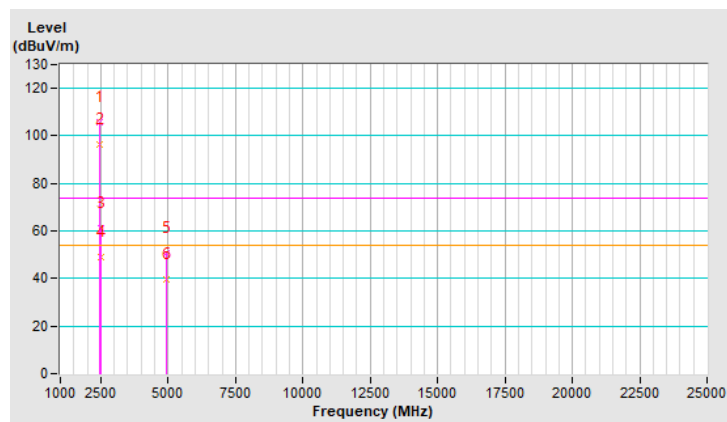


操作模式：	發射 802.11g	調變技術：	OFDM-MIMO
基本波頻率：	CH 11：2462 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	115.1 PK			1.75 V	177	81.0	34.1
2	*2462.00	106.5 AV			1.75 V	177	72.4	34.1
3	2483.50	67.6 PK	74.0	-6.4	1.75 V	177	33.5	34.1
4	2483.50	52.7 AV	54.0	-1.3	1.75 V	177	18.6	34.1
5	4924.00	51.4 PK	74.0	-22.6	1.98 V	232	37.8	13.6
6	4924.00	40.0 AV	54.0	-14.0	1.98 V	232	26.4	13.6
7	7386.00	-	-	-	-	-	-	-
8	#9848.00	-	-	-	-	-	-	-
9	12310.00	-	-	-	-	-	-	-
10	#14772.00	-	-	-	-	-	-	-
11	#17234.00	-	-	-	-	-	-	-
12	19696.00	-	-	-	-	-	-	-
13	22158.00	-	-	-	-	-	-	-
14	#24620.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

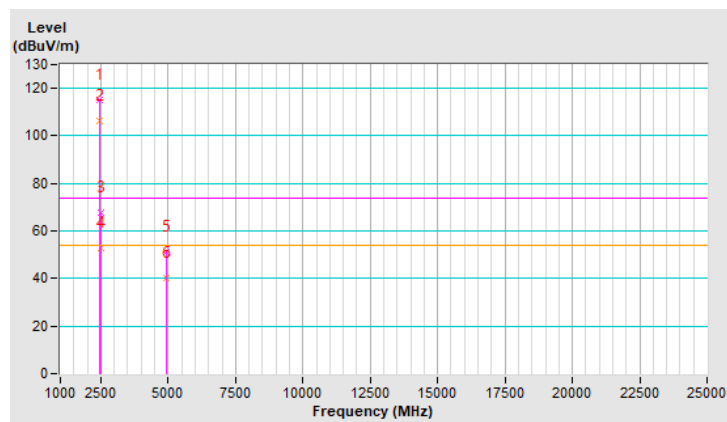


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 1：2412 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 19 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.4 PK	74.0	-13.6	1.11 H	184	26.3	34.1
2	2390.00	48.2 AV	54.0	-5.8	1.11 H	184	14.1	34.1
3	*2412.00	105.8 PK			1.11 H	184	71.7	34.1
4	*2412.00	94.3 AV			1.11 H	184	60.2	34.1
5	4824.00	50.5 PK	74.0	-23.5	1.38 H	215	36.8	13.7
6	4824.00	39.8 AV	54.0	-14.2	1.38 H	215	26.1	13.7
7	#7236.00	-	-	-	-	-	-	-
8	#9648.00	-	-	-	-	-	-	-
9	12060.00	-	-	-	-	-	-	-
10	14472.00	-	-	-	-	-	-	-
11	#16884.00	-	-	-	-	-	-	-
12	19296.00	-	-	-	-	-	-	-
13	#21708.00	-	-	-	-	-	-	-
14	#24120.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

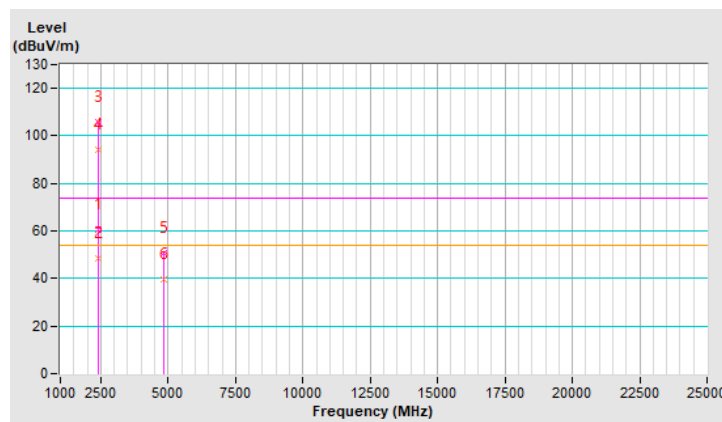


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 1：2412 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.4 PK	74.0	-9.6	1.79 V	180	30.3	34.1
2	2390.00	52.7 AV	54.0	-1.3	1.79 V	180	18.6	34.1
3	*2412.00	116.5 PK			1.79 V	180	82.4	34.1
4	*2412.00	103.8 AV			1.79 V	180	69.7	34.1
5	4824.00	51.5 PK	74.0	-22.5	2.00 V	267	37.8	13.7
6	4824.00	40.2 AV	54.0	-13.8	2.00 V	267	26.5	13.7
7	#7236.00	-	-	-	-	-	-	-
8	#9648.00	-	-	-	-	-	-	-
9	12060.00	-	-	-	-	-	-	-
10	14472.00	-	-	-	-	-	-	-
11	#16884.00	-	-	-	-	-	-	-
12	19296.00	-	-	-	-	-	-	-
13	#21708.00	-	-	-	-	-	-	-
14	#24120.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

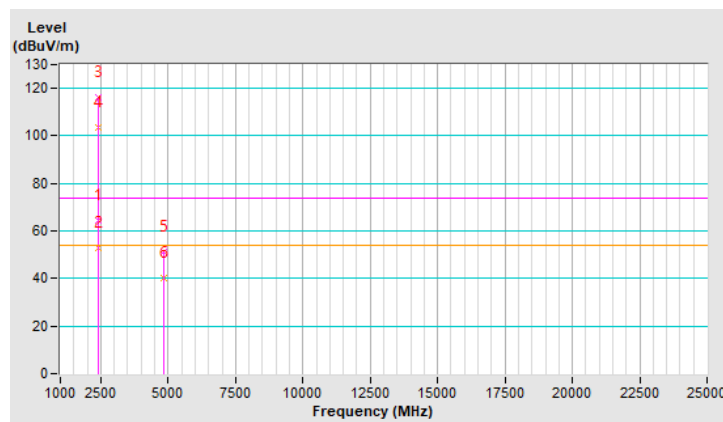


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 6：2437 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 19 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.8 PK	74.0	-13.2	1.06 H	182	26.7	34.1
2	2390.00	48.6 AV	54.0	-5.4	1.06 H	182	14.5	34.1
3	*2437.00	114.4 PK			1.06 H	182	80.3	34.1
4	*2437.00	103.2 AV			1.06 H	182	69.1	34.1
5	4874.00	51.2 PK	74.0	-22.8	1.57 H	202	37.5	13.7
6	4874.00	39.7 AV	54.0	-14.3	1.57 H	202	26.0	13.7
7	7311.00	-	-	-	-	-	-	-
8	#9748.00	-	-	-	-	-	-	-
9	12185.00	-	-	-	-	-	-	-
10	#14622.00	-	-	-	-	-	-	-
11	#17059.00	-	-	-	-	-	-	-
12	19496.00	-	-	-	-	-	-	-
13	#21933.00	-	-	-	-	-	-	-
14	#24370.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

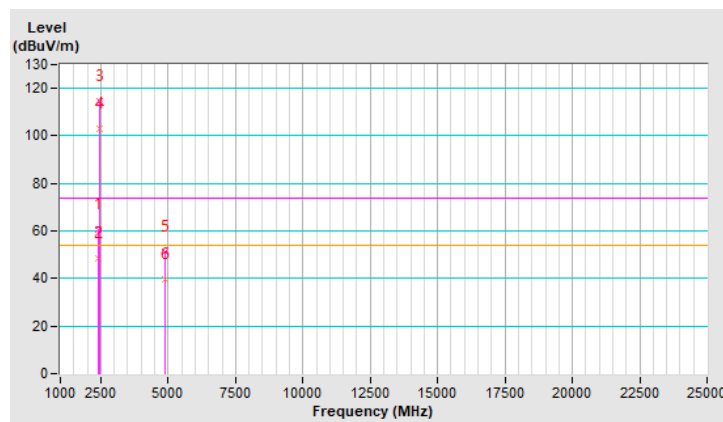


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 6：2437 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.9 PK	74.0	-6.1	1.93 V	185	33.8	34.1
2	2390.00	52.5 AV	54.0	-1.5	1.93 V	185	18.4	34.1
3	*2437.00	124.4 PK			1.93 V	185	90.3	34.1
4	*2437.00	112.2 AV			1.93 V	185	78.1	34.1
5	4874.00	52.2 PK	74.0	-21.8	2.17 V	244	38.5	13.7
6	4874.00	40.6 AV	54.0	-13.4	2.17 V	244	26.9	13.7
7	7311.00	-	-	-	-	-	-	-
8	#9748.00	-	-	-	-	-	-	-
9	12185.00	-	-	-	-	-	-	-
10	#14622.00	-	-	-	-	-	-	-
11	#17059.00	-	-	-	-	-	-	-
12	19496.00	-	-	-	-	-	-	-
13	#21933.00	-	-	-	-	-	-	-
14	#24370.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

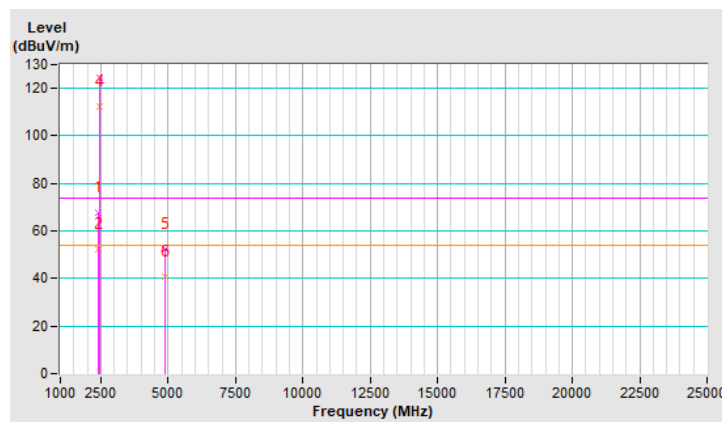


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 11：2462 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 19 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.2 PK			1.11 H	178	72.1	34.1
2	*2462.00	93.9 AV			1.11 H	178	59.8	34.1
3	2483.50	61.6 PK	74.0	-12.4	1.11 H	178	27.5	34.1
4	2483.50	48.8 AV	54.0	-5.2	1.11 H	178	14.7	34.1
5	4924.00	51.9 PK	74.0	-22.1	1.62 H	243	38.3	13.6
6	4924.00	40.1 AV	54.0	-13.9	1.62 H	243	26.5	13.6
7	7386.00	-	-	-	-	-	-	-
8	#9848.00	-	-	-	-	-	-	-
9	12310.00	-	-	-	-	-	-	-
10	#14772.00	-	-	-	-	-	-	-
11	#17234.00	-	-	-	-	-	-	-
12	19696.00	-	-	-	-	-	-	-
13	22158.00	-	-	-	-	-	-	-
14	#24620.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

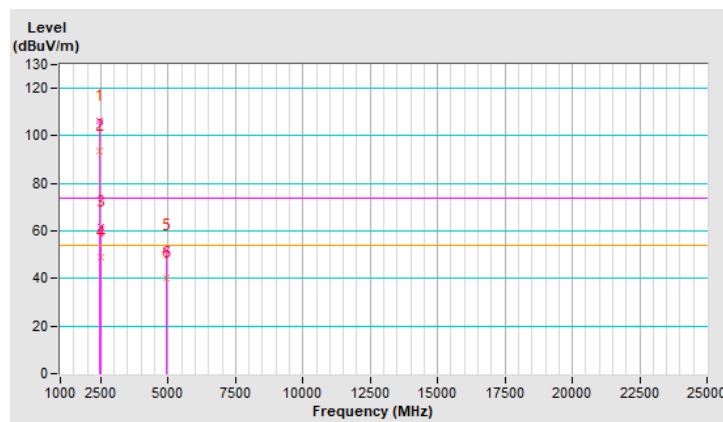


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 11：2462 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	114.7 PK			1.77 V	178	80.6	34.1
2	*2462.00	103.3 AV			1.77 V	178	69.2	34.1
3	2483.50	66.4 PK	74.0	-7.6	1.77 V	178	32.3	34.1
4	2483.50	52.4 AV	54.0	-1.6	1.77 V	178	18.3	34.1
5	4924.00	52.3 PK	74.0	-21.7	2.43 V	185	38.7	13.6
6	4924.00	39.9 AV	54.0	-14.1	2.43 V	185	26.3	13.6
7	7386.00	-	-	-	-	-	-	-
8	#9848.00	-	-	-	-	-	-	-
9	12310.00	-	-	-	-	-	-	-
10	#14772.00	-	-	-	-	-	-	-
11	#17234.00	-	-	-	-	-	-	-
12	19696.00	-	-	-	-	-	-	-
13	22158.00	-	-	-	-	-	-	-
14	#24620.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

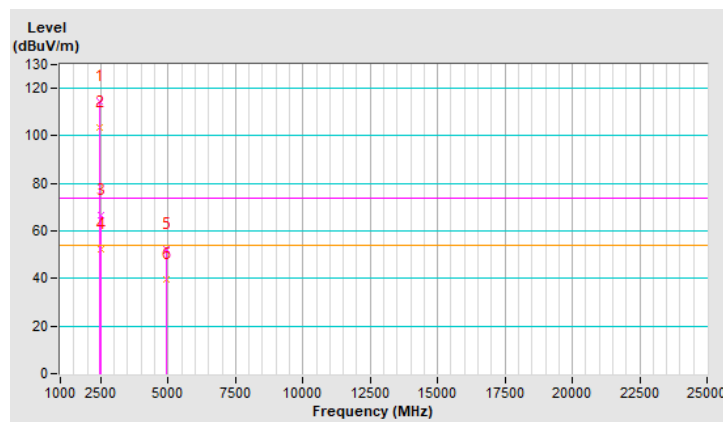


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 3：2422 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 19 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.2 PK	74.0	-13.8	1.09 H	180	26.1	34.1
2	2390.00	49.0 AV	54.0	-5.0	1.09 H	180	14.9	34.1
3	*2422.00	101.6 PK			1.09 H	180	67.6	34.0
4	*2422.00	89.5 AV			1.09 H	180	55.5	34.0
5	4844.00	51.2 PK	74.0	-22.8	1.52 H	238	37.5	13.7
6	4844.00	39.9 AV	54.0	-14.1	1.52 H	238	26.2	13.7
7	7266.00	-	-	-	-	-	-	-
8	#9688.00	-	-	-	-	-	-	-
9	12110.00	-	-	-	-	-	-	-
10	#14532.00	-	-	-	-	-	-	-
11	#16954.00	-	-	-	-	-	-	-
12	19376.00	-	-	-	-	-	-	-
13	#21798.00	-	-	-	-	-	-	-
14	#24220.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

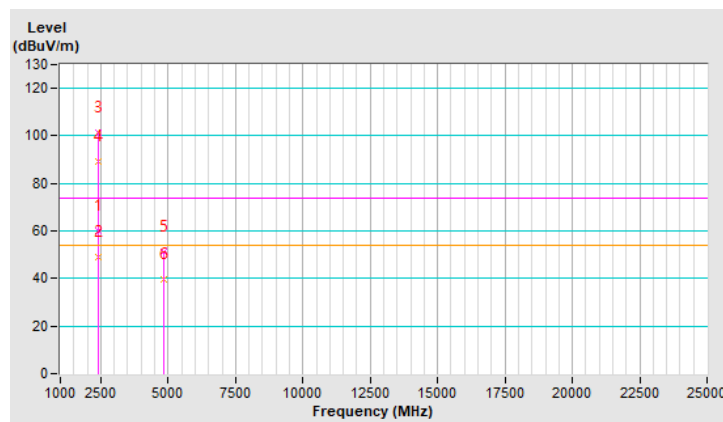


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 3：2422 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.6 PK	74.0	-9.4	1.72 V	176	30.5	34.1
2	2390.00	52.8 AV	54.0	-1.2	1.72 V	176	18.7	34.1
3	*2422.00	112.5 PK			1.72 V	176	78.5	34.0
4	*2422.00	99.1 AV			1.72 V	176	65.1	34.0
5	4844.00	51.4 PK	74.0	-22.6	2.15 V	224	37.7	13.7
6	4844.00	40.0 AV	54.0	-14.0	2.15 V	224	26.3	13.7
7	7266.00	-	-	-	-	-	-	-
8	#9688.00	-	-	-	-	-	-	-
9	12110.00	-	-	-	-	-	-	-
10	#14532.00	-	-	-	-	-	-	-
11	#16954.00	-	-	-	-	-	-	-
12	19376.00	-	-	-	-	-	-	-
13	#21798.00	-	-	-	-	-	-	-
14	#24220.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

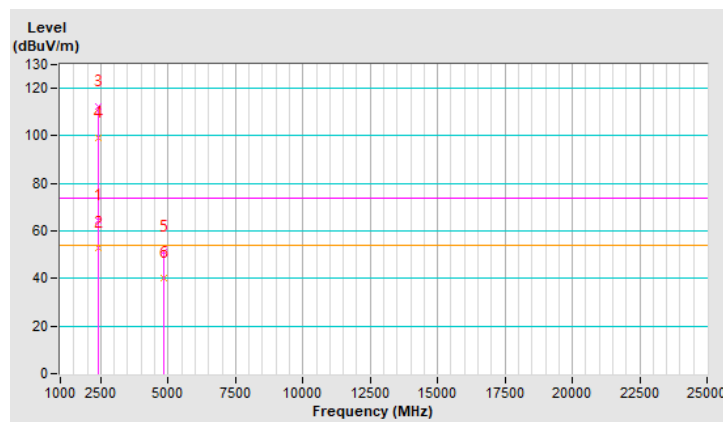


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 6：2437 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 19 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.6 PK	74.0	-13.4	1.25 H	178	26.5	34.1
2	2390.00	48.7 AV	54.0	-5.3	1.25 H	178	14.6	34.1
3	*2437.00	106.2 PK			1.25 H	178	72.1	34.1
4	*2437.00	94.5 AV			1.25 H	178	60.4	34.1
5	4874.00	50.9 PK	74.0	-23.1	1.50 H	227	37.2	13.7
6	4874.00	39.6 AV	54.0	-14.4	1.50 H	227	25.9	13.7
7	7311.00	-	-	-	-	-	-	-
8	#9748.00	-	-	-	-	-	-	-
9	12185.00	-	-	-	-	-	-	-
10	#14622.00	-	-	-	-	-	-	-
11	#17059.00	-	-	-	-	-	-	-
12	19496.00	-	-	-	-	-	-	-
13	#21933.00	-	-	-	-	-	-	-
14	#24370.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

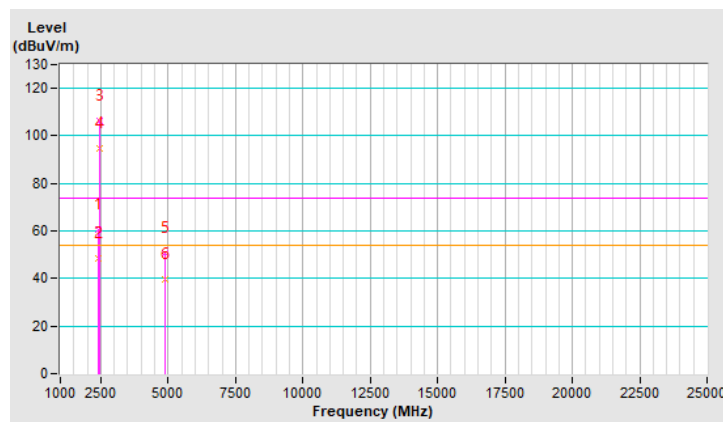


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 6：2437 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.9 PK	74.0	-11.1	1.63 V	177	28.8	34.1
2	2390.00	52.5 AV	54.0	-1.5	1.63 V	177	18.4	34.1
3	*2437.00	115.3 PK			1.63 V	177	81.2	34.1
4	*2437.00	103.2 AV			1.63 V	177	69.1	34.1
5	4874.00	51.3 PK	74.0	-22.7	1.97 V	241	37.6	13.7
6	4874.00	40.5 AV	54.0	-13.5	1.97 V	241	26.8	13.7
7	7311.00	-	-	-	-	-	-	-
8	#9748.00	-	-	-	-	-	-	-
9	12185.00	-	-	-	-	-	-	-
10	#14622.00	-	-	-	-	-	-	-
11	#17059.00	-	-	-	-	-	-	-
12	19496.00	-	-	-	-	-	-	-
13	#21933.00	-	-	-	-	-	-	-
14	#24370.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

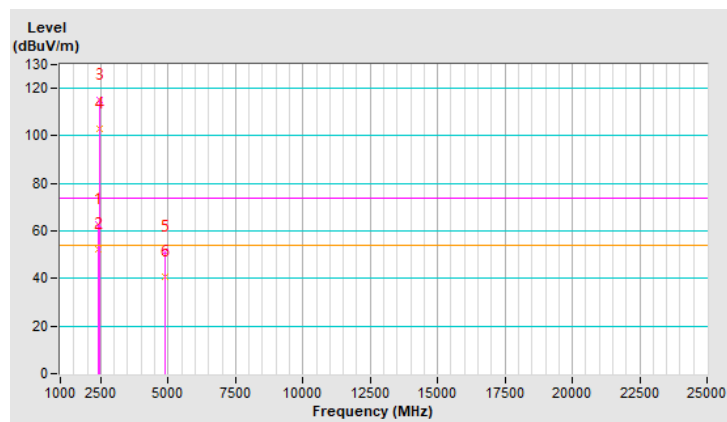


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 9：2452 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 19 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	101.5 PK			1.22 H	177	67.4	34.1
2	*2452.00	89.5 AV			1.22 H	177	55.4	34.1
3	2483.50	61.4 PK	74.0	-12.6	1.22 H	177	27.3	34.1
4	2483.50	48.8 AV	54.0	-5.2	1.22 H	177	14.7	34.1
5	4904.00	51.1 PK	74.0	-22.9	1.52 H	213	37.4	13.7
6	4904.00	39.6 AV	54.0	-14.4	1.52 H	213	25.9	13.7
7	7356.00	-	-	-	-	-	-	-
8	#9808.00	-	-	-	-	-	-	-
9	12260.00	-	-	-	-	-	-	-
10	#14712.00	-	-	-	-	-	-	-
11	#17164.00	-	-	-	-	-	-	-
12	19616.00	-	-	-	-	-	-	-
13	22068.00	-	-	-	-	-	-	-
14	#24520.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

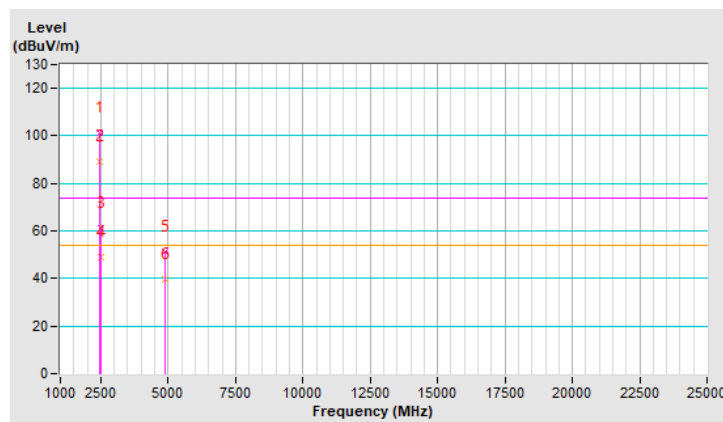


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 9：2452 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	110.2 PK			1.76 V	183	76.1	34.1
2	*2452.00	98.7 AV			1.76 V	183	64.6	34.1
3	2483.50	64.3 PK	74.0	-9.7	1.76 V	183	30.2	34.1
4	2483.50	52.5 AV	54.0	-1.5	1.76 V	183	18.4	34.1
5	4904.00	50.5 PK	74.0	-23.5	2.05 V	249	36.8	13.7
6	4904.00	39.6 AV	54.0	-14.4	2.05 V	249	25.9	13.7
7	7356.00	-	-	-	-	-	-	-
8	#9808.00	-	-	-	-	-	-	-
9	12260.00	-	-	-	-	-	-	-
10	#14712.00	-	-	-	-	-	-	-
11	#17164.00	-	-	-	-	-	-	-
12	19616.00	-	-	-	-	-	-	-
13	22068.00	-	-	-	-	-	-	-
14	#24520.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

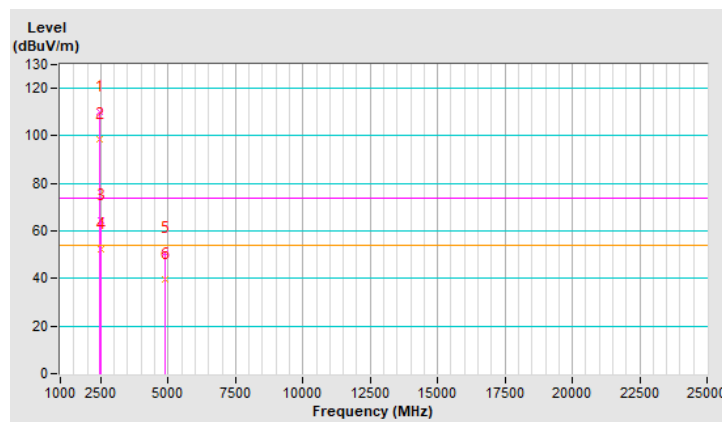


4.6.2 接收諧波

操作模式：	接收		
基本波頻率：	CH 6：2437 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3MHz (RMS)
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 20 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3655.00	50.6 PK	74.0	-23.4	2.16 H	348	42.8	7.8
2	3655.00	41.2 AV	54.0	-12.8	2.16 H	348	33.4	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.

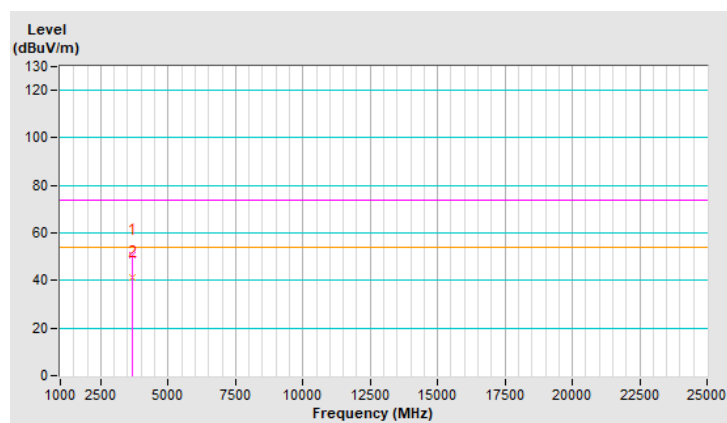


操 作 模 式 :	接收		
基 本 波 頻 率 :	CH 6 : 2437 MHz	檢 測 器 與 頻 寬 :	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3MHz (RMS)
量 測 場 地 溫 度 :	25 °C	量 測 場 地 濕 度 :	70% RH
測 試 日 期 :	110 年 07 月 20 日	測 試 者 :	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3655.00	48.0 PK	74.0	-26.0	1.68 V	17	40.2	7.8
2	3655.00	37.6 AV	54.0	-16.4	1.68 V	17	29.8	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.

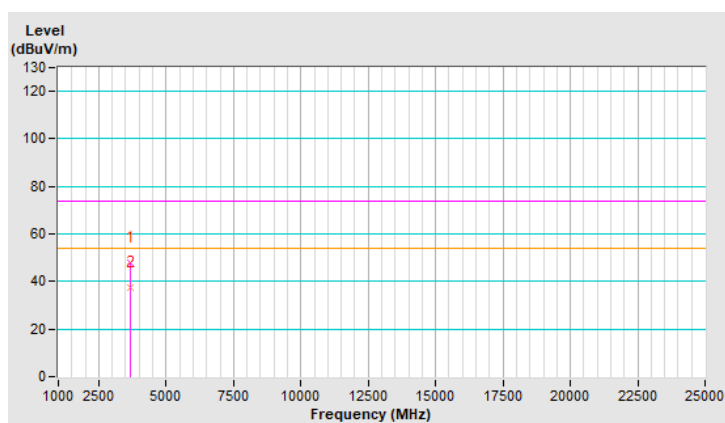


4.6.3 其它不必要之訊號

操作模式：	發射/接收 802.11g	調變技術：	OFDM-MIMO
基本波頻率：	CH 6：2437 MHz	檢測器與頻寬：	(QP) RB=120kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 20 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	101.69	28.7 QP	43.5	-14.8	1.50 H	242	41.8	-13.1
2	135.65	24.9 QP	43.5	-18.6	1.50 H	351	34.4	-9.5
3	396.64	34.8 QP	46.0	-11.2	1.00 H	327	40.2	-5.4
4	821.58	30.4 QP	46.0	-15.6	1.00 H	39	26.0	4.4
5	885.62	33.7 QP	46.0	-12.3	2.00 H	252	28.4	5.3
6	938.01	37.3 QP	46.0	-8.7	1.50 H	178	30.6	6.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

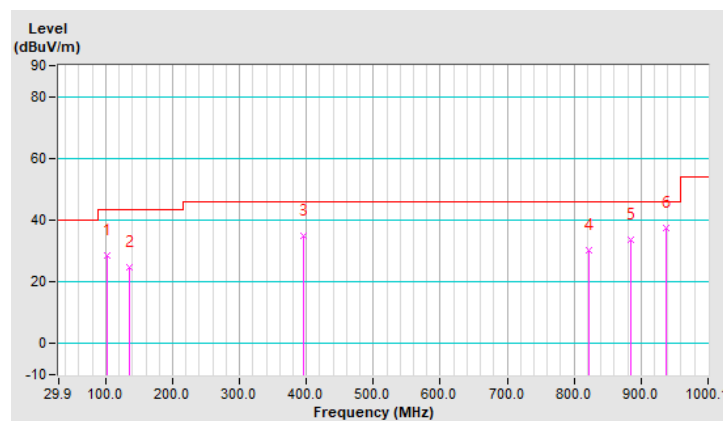


操作模式：	發射/接收 802.11g	調變技術：	OFDM-MIMO
基本波頻率：	CH 6：2437 MHz	檢測器與頻寬：	(QP) RB=120kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 20 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	93.93	32.8 QP	43.5	-10.7	1.50 V	121	46.9	-14.1
2	187.07	28.8 QP	43.5	-14.7	1.50 V	35	39.8	-11.0
3	249.17	30.1 QP	46.0	-15.9	2.00 V	197	39.4	-9.3
4	313.20	36.4 QP	46.0	-9.6	1.00 V	284	43.4	-7.0
5	504.33	38.5 QP	46.0	-7.5	1.00 V	263	41.8	-3.3
6	934.13	39.9 QP	46.0	-6.1	1.50 V	198	33.2	6.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

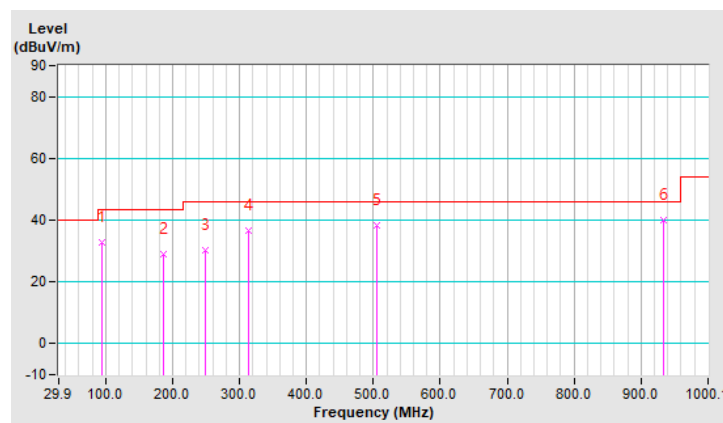

4.7 量測結果判定


依據測試數據結果，符合低功率射頻器材技術規範之要求。

4.8 配置照片

請參閱附件測試設置照片(BV CPS 報告編號：BCWK-WTW-P21050819_TSup)。


4.9 帶外發射之量測 (傳導)

802.11b Chain 0

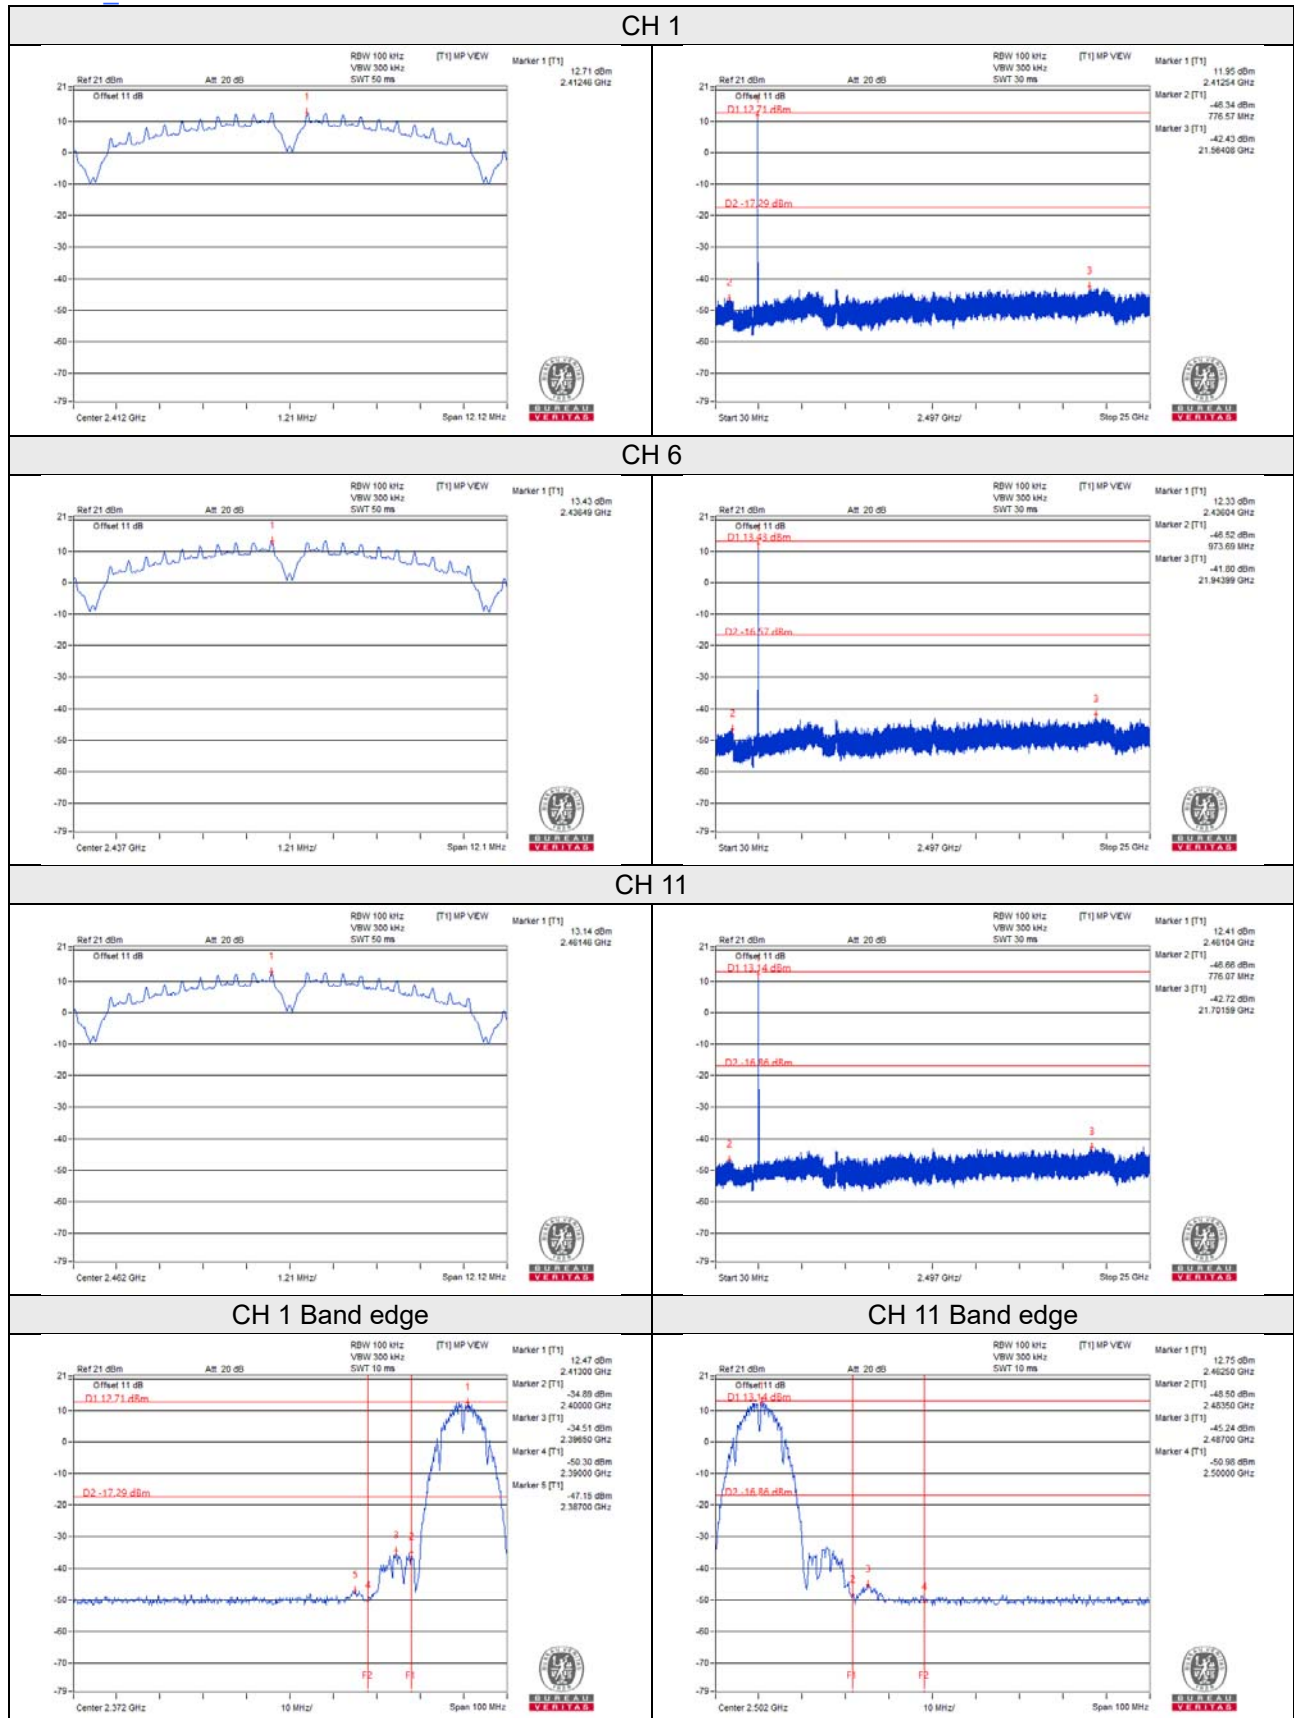


802.11b_Chain 1


CH 1

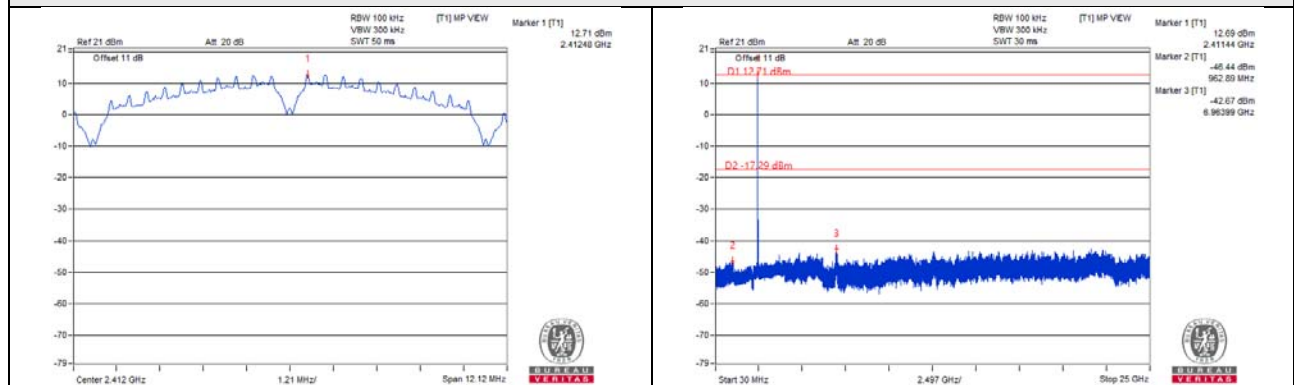


CH 6

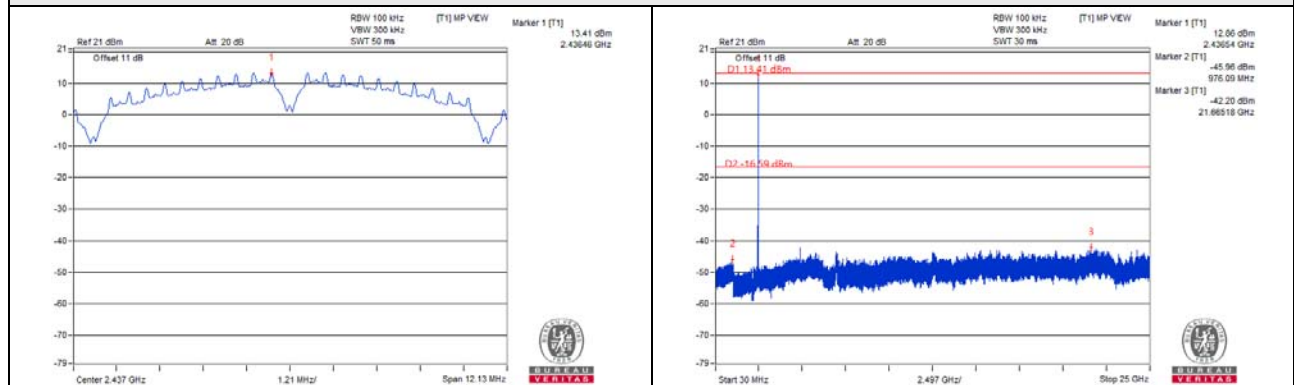


CH 11

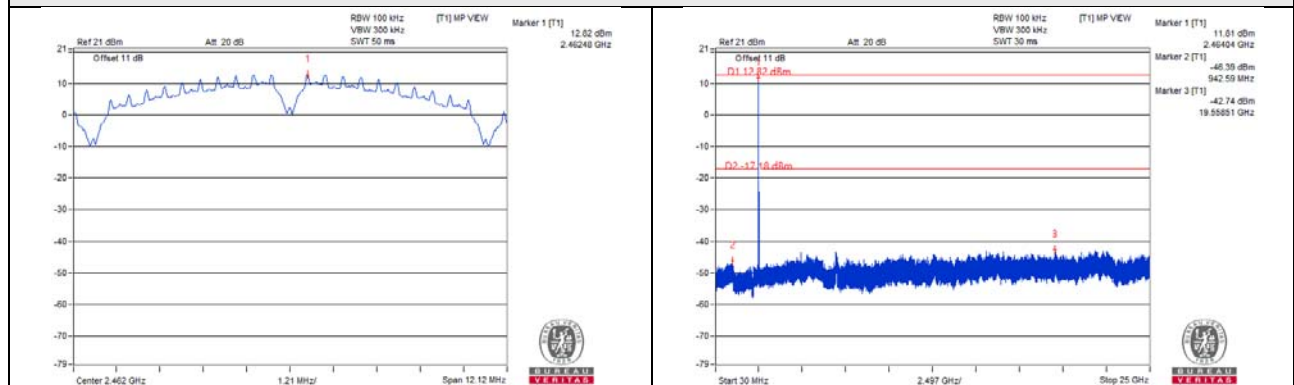

CH 1 Band edge

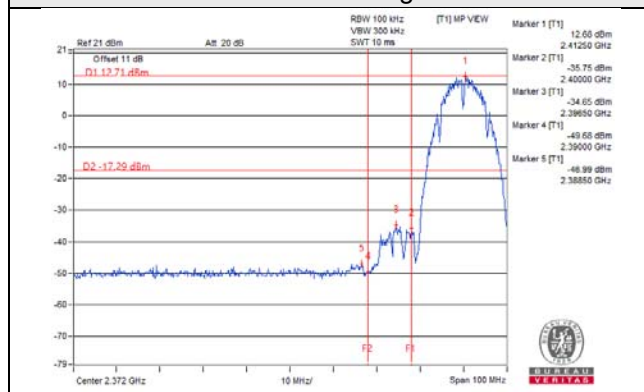


CH 11 Band edge

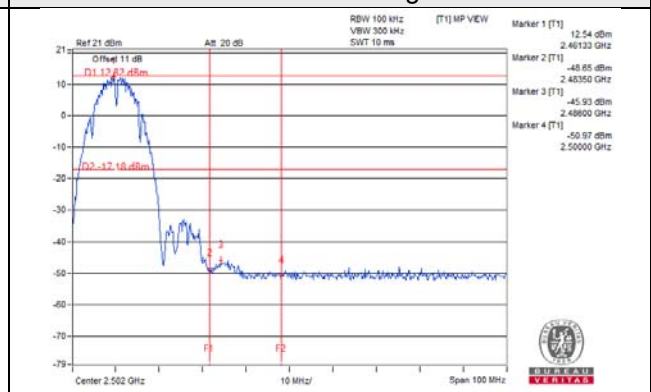


802.11g_Chain 0


CH 1

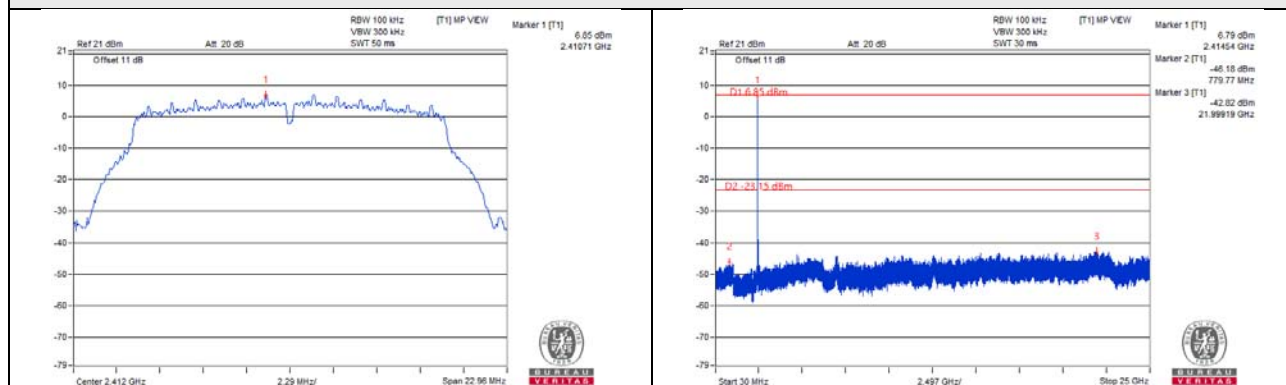


CH 6

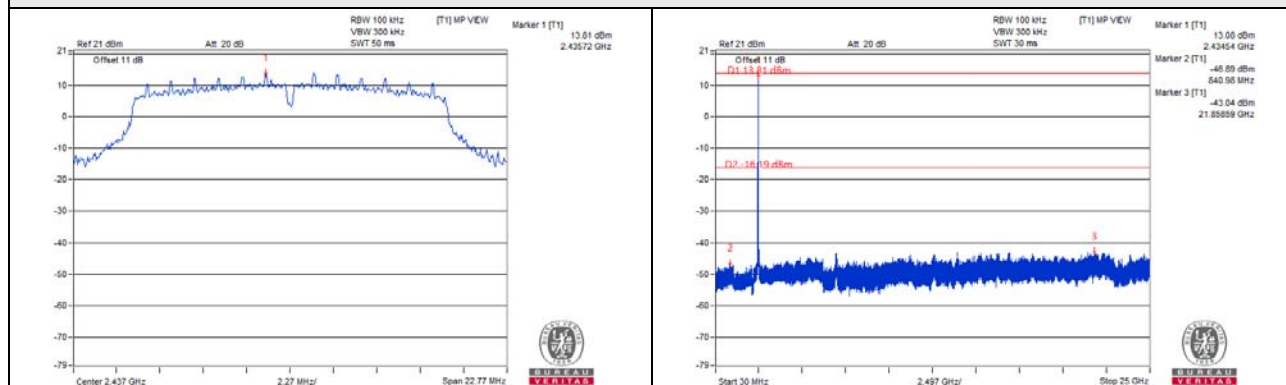

CH 11


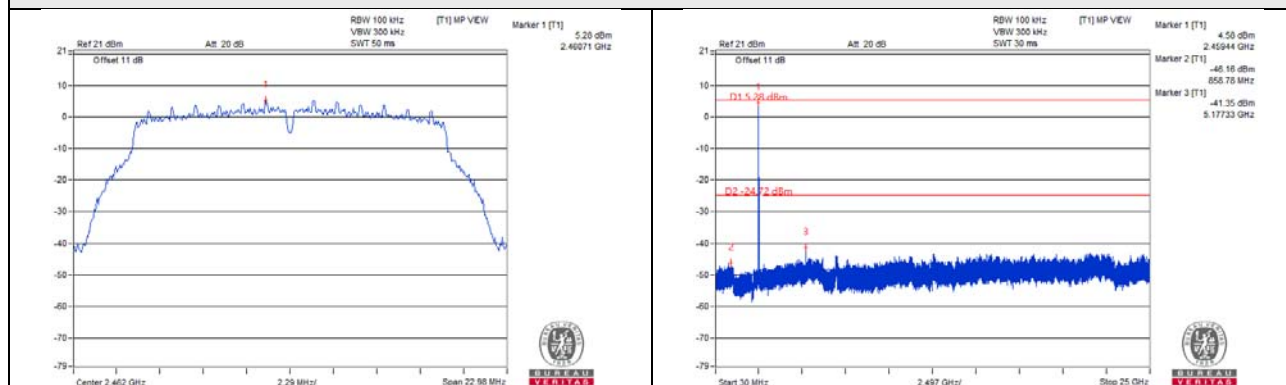


CH 1 Band edge


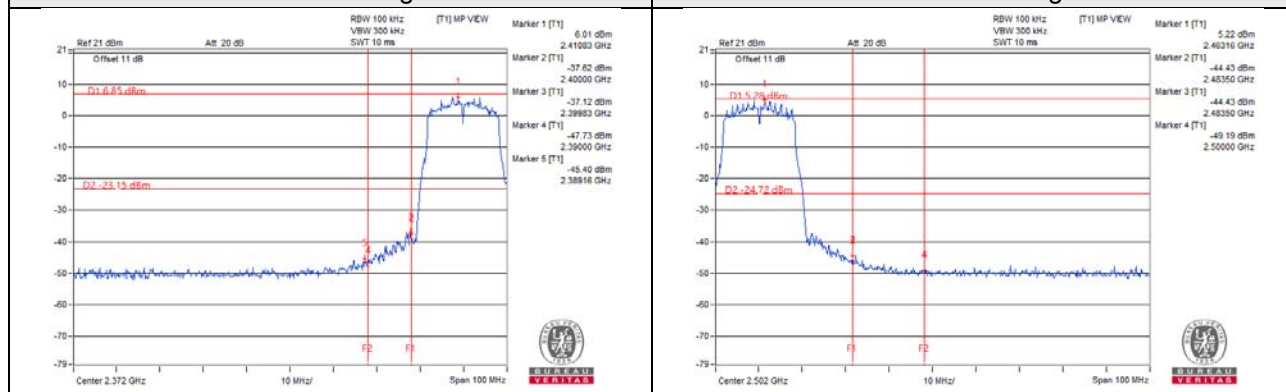


802.11g_Chain 1



CH 1

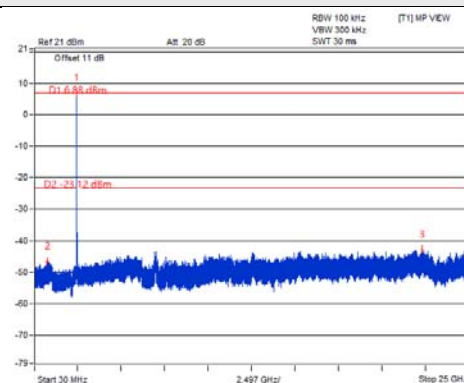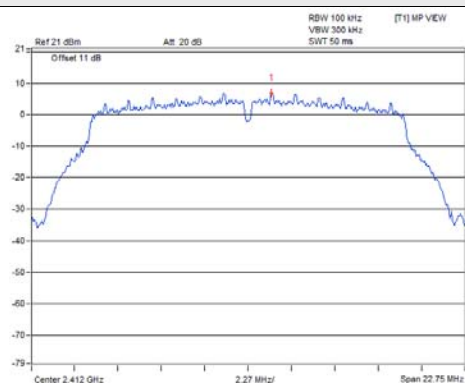


CH 6

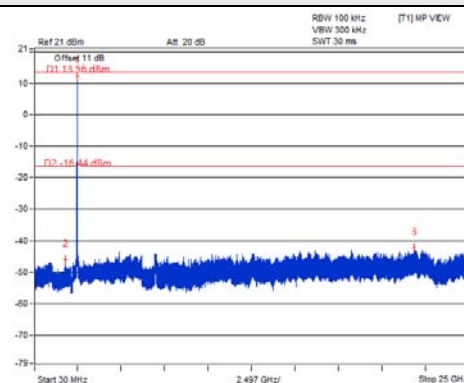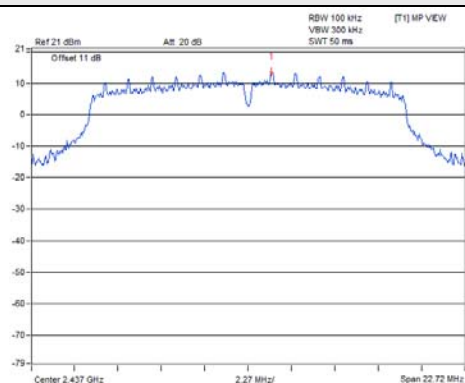


CH 11

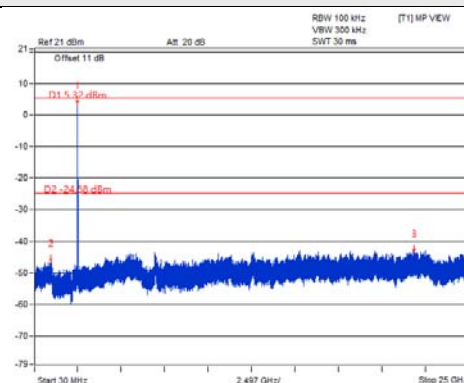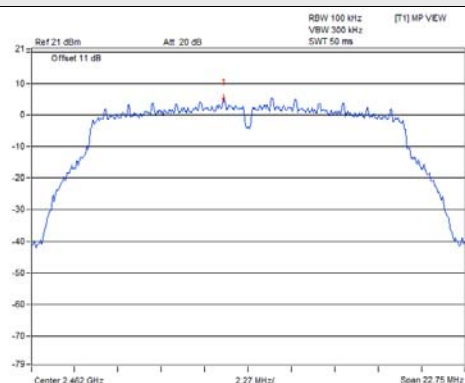

CH 1 Band edge

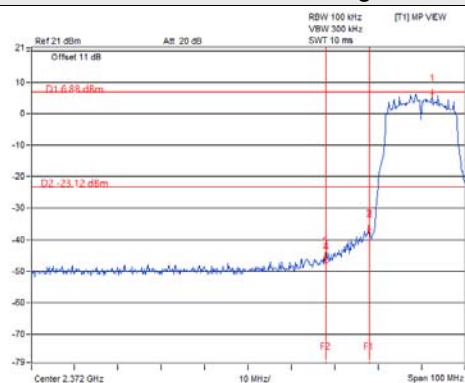


CH 11 Band edge

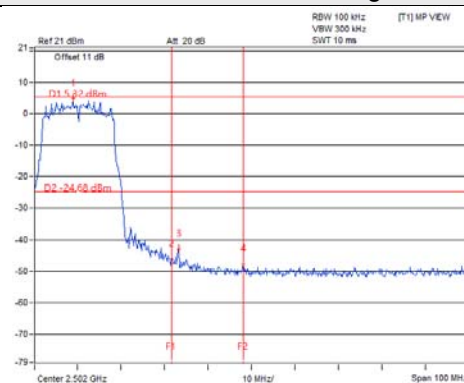


802.11ax (HE20)_Chain 0


CH 1

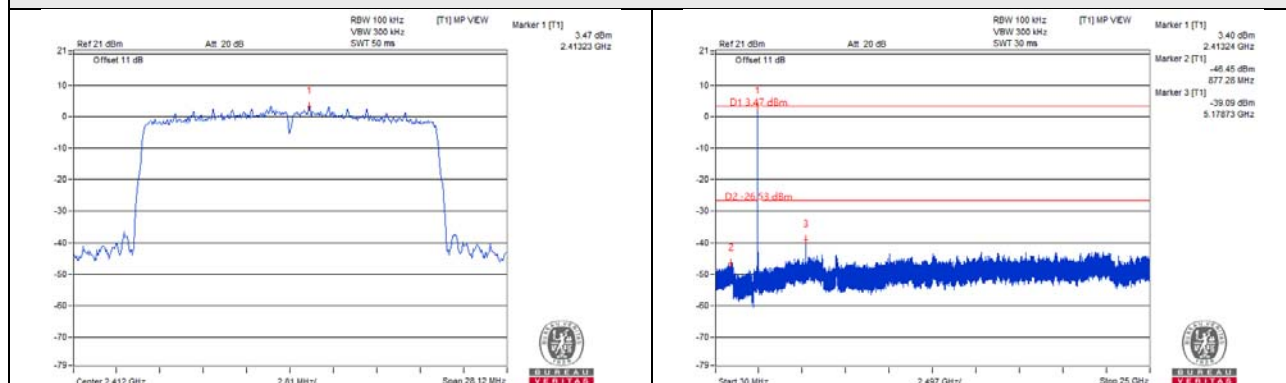


CH 6

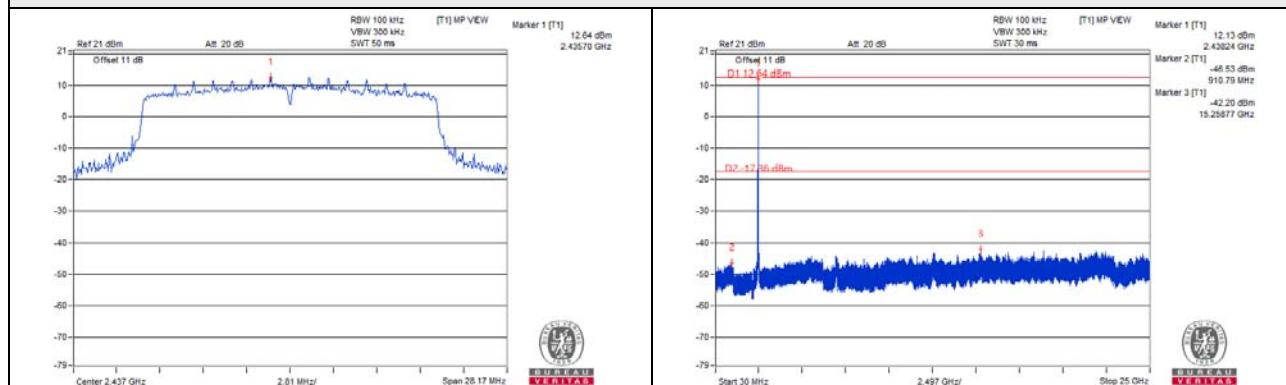


CH 11

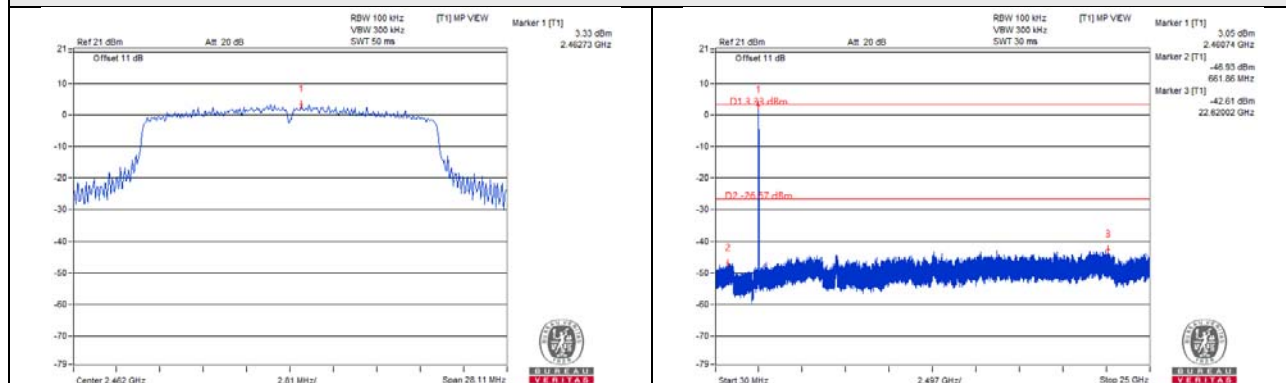

CH 1 Band edge

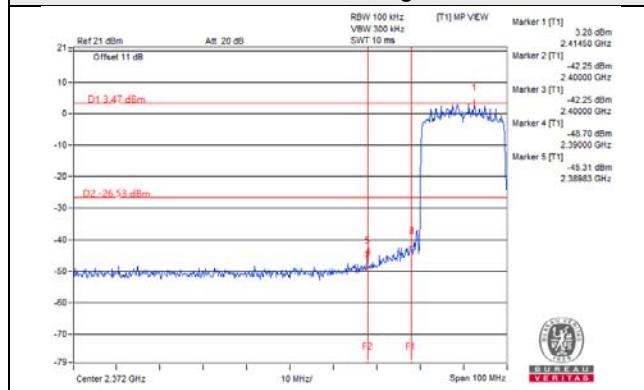


CH 11 Band edge

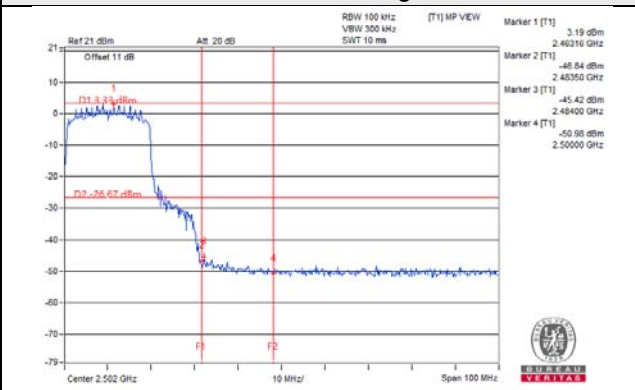


802.11ax (HE20)_Chain 1


CH 1

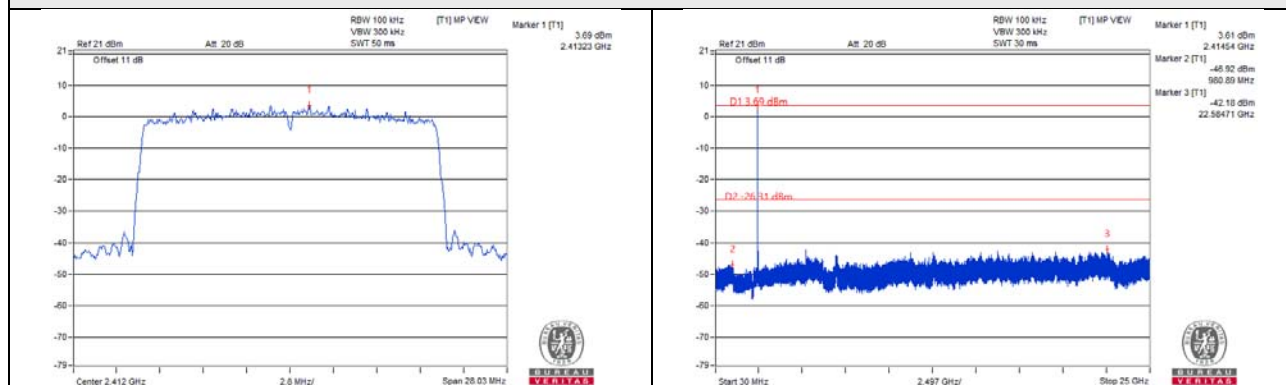


CH 6

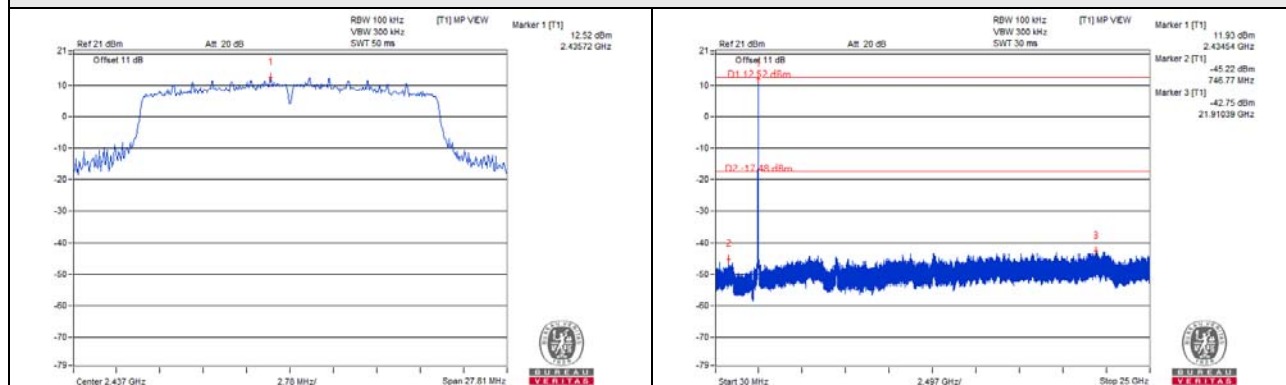

CH 11

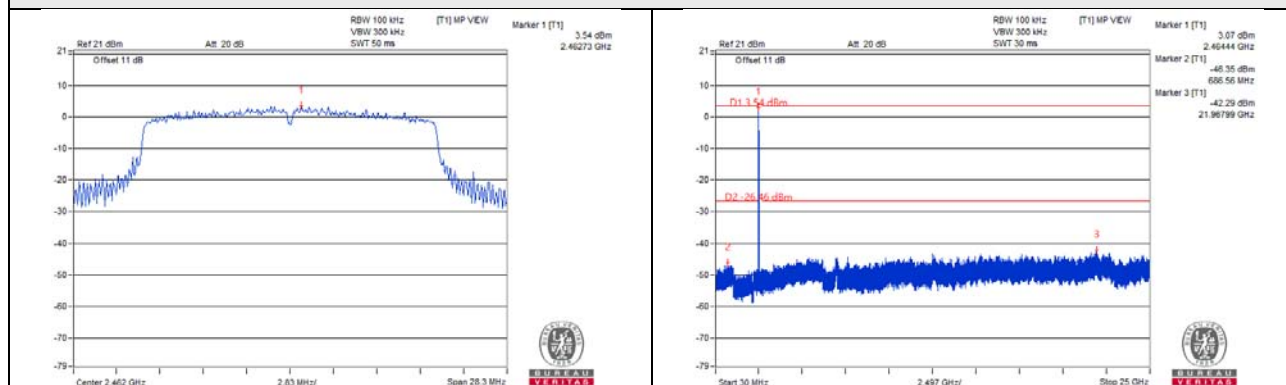


CH 1 Band edge

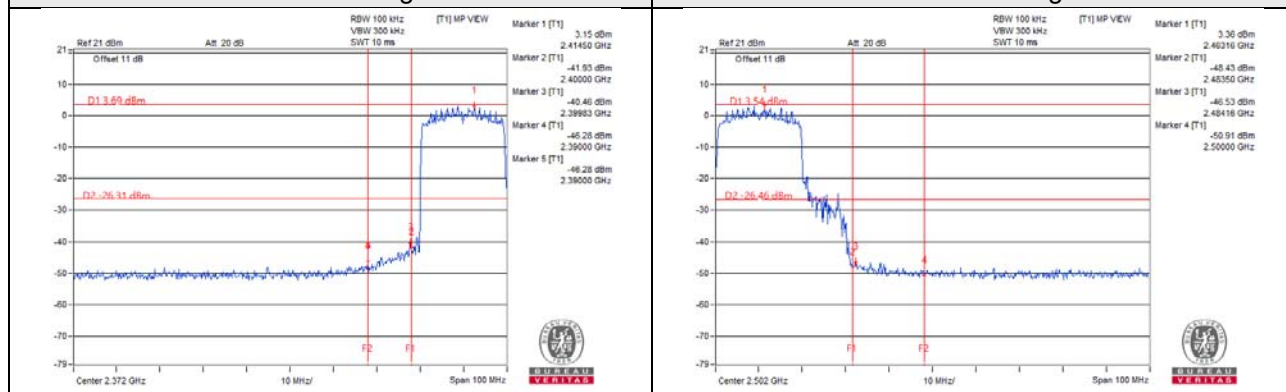


802.11ax (HE40)_Chain 0


CH 3

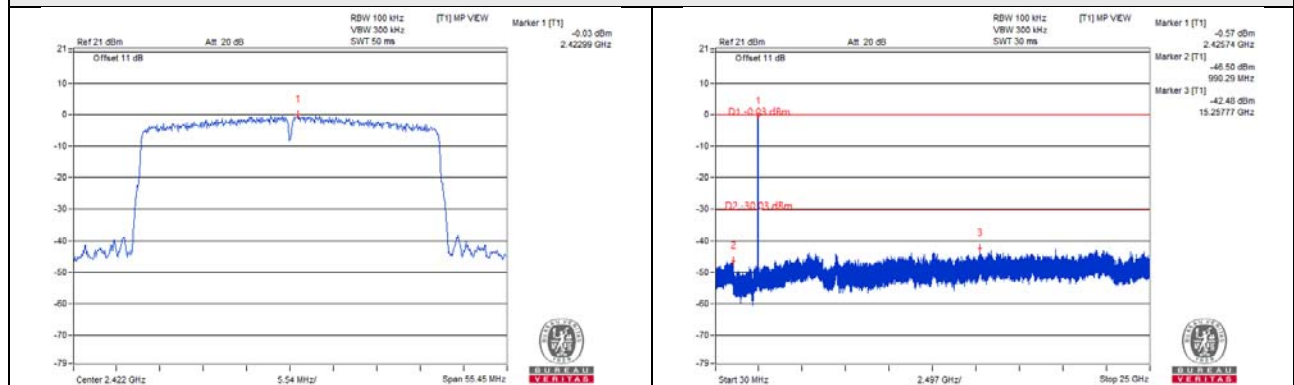


CH 6

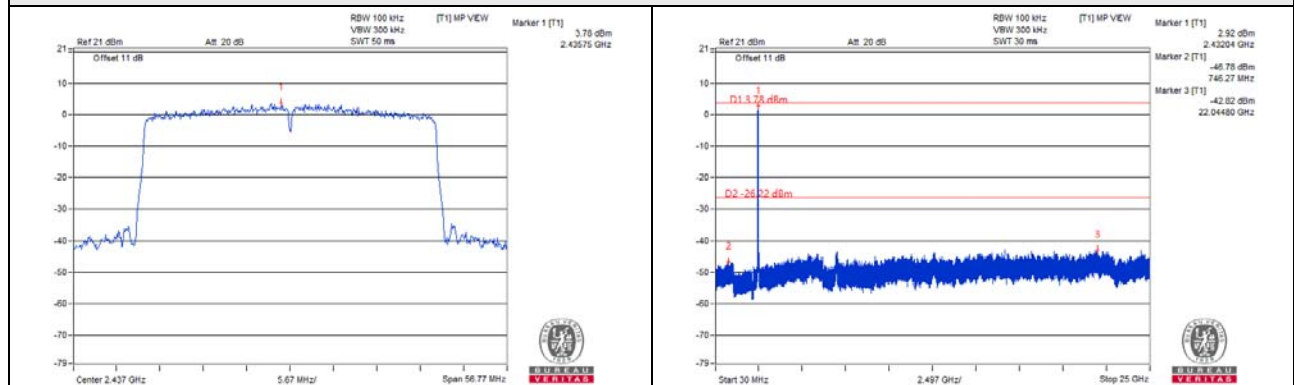

CH 9


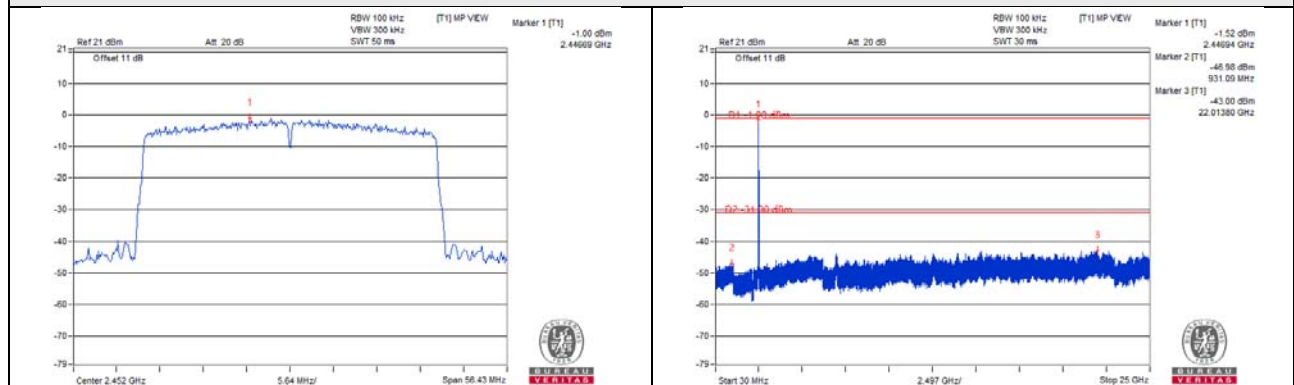


CH 3 Band edge


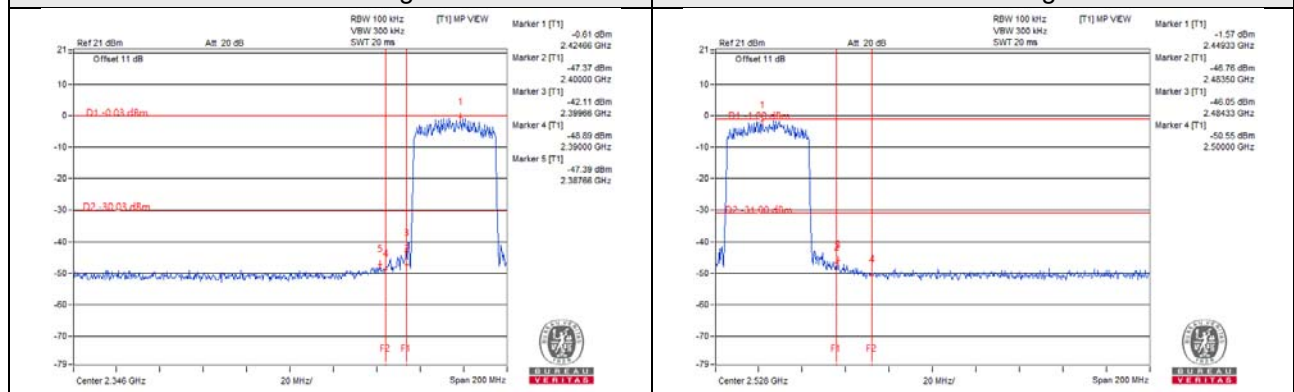


802.11ax (HE40)_Chain 1



CH 3

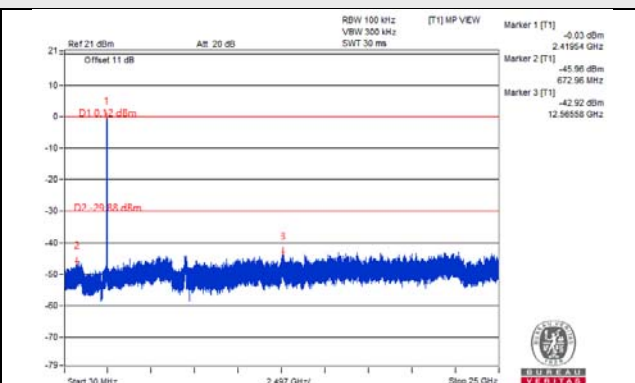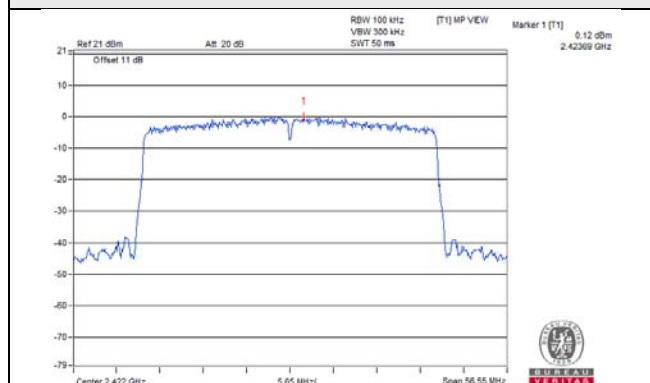



CH 6

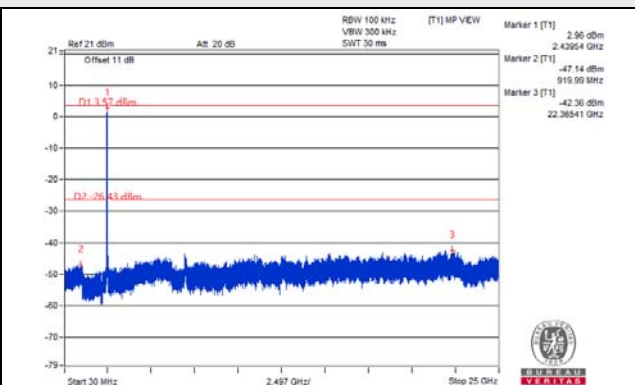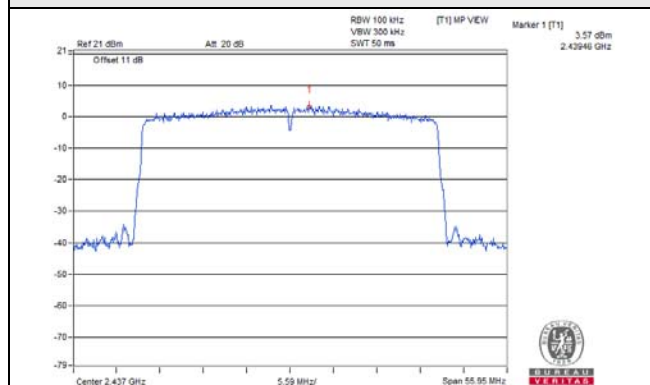

CH 9

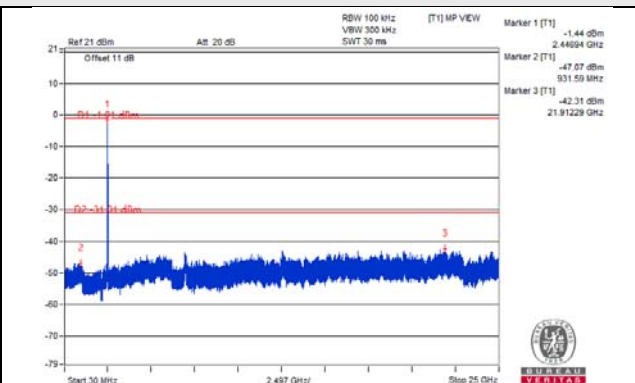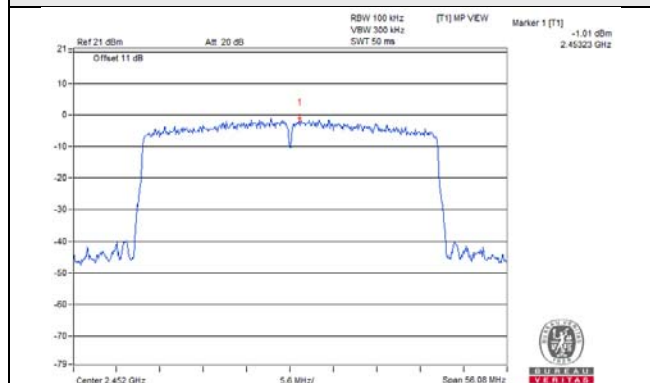

CH 3 Band edge

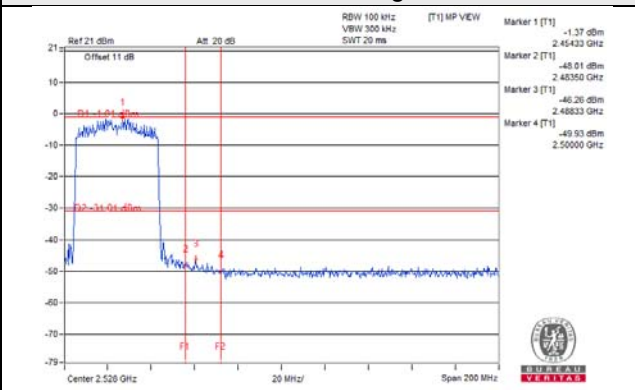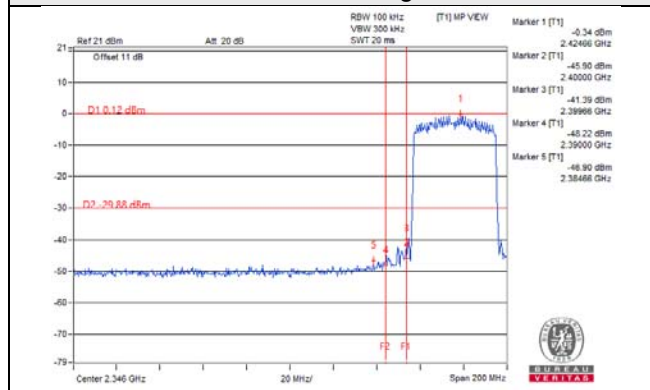

4.10 量測結果判定

依據測試數據結果，符合低功率射頻器材技術規範之要求。

5 電源線傳導干擾之量測

5.1 適用標準

請見本報告3.1節第1項的規定。

5.2 量測方法


將待測物置於0.8米高的非金屬桌面，使其操作在工作狀態，待測物電源線接至電源線阻抗穩定網路上，從測試接收機記錄頻率由0.15MHz至30MHz之間之電源線傳導放射強度。

5.3 量測儀器

儀器名稱 (廠牌/製造商)	型號	序號	校正日期	下次校正日期
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Dec. 04, 2020	Dec. 03, 2021
RF signal cable Woken	5D-FB	Cable-cond1-01	Jan. 16, 2021	Jan. 15, 2022
LISN ROHDE & SCHWARZ (EUT)	ENV216	101826	Feb. 25, 2021	Feb. 24, 2022
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Aug. 28, 2020	Aug. 27, 2021
Software ADT	BV ADT_Conf_ V7.3.7.4	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 1.
3. The VCCI Site Registration No. is C-12040.
4. The measurement uncertainty is 2.79 dB, which is calculated as per the document CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

5.4 測試配置

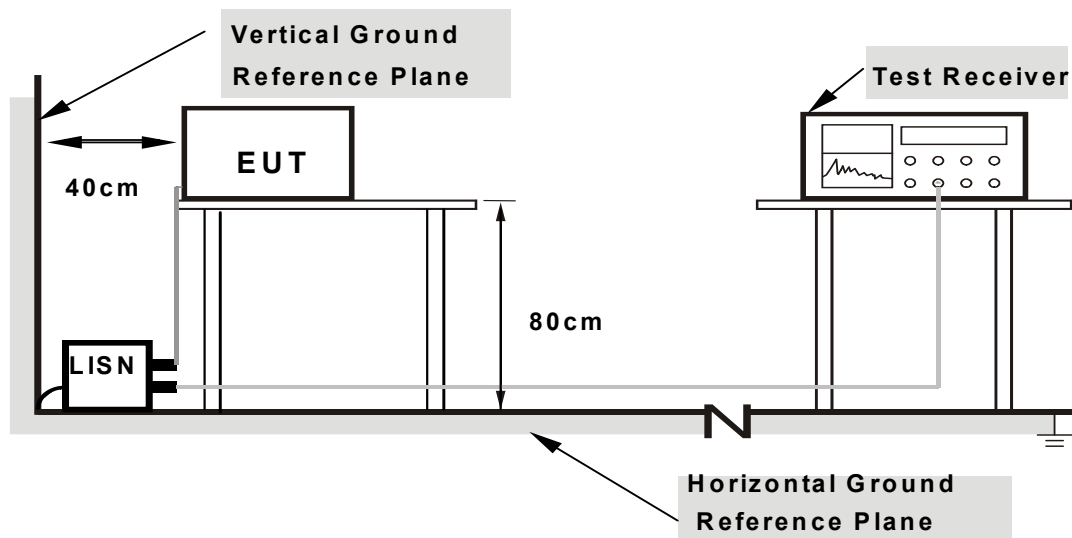

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

5.5 干擾值之計算

餘裕度Margin(dB)= 結果值Emission level (dBuV)-限制值Limit value (dBuV)

電源傳導干擾電壓之計算公式如下

結果值Emission level (dBuV)=校正因子Correction Factor (dB)+儀器讀值Reading value (dBuV)

其中校正因子Correction Factor (dB)為：

饋線損失+電源阻抗模擬網路損失


5.6 量測結果

操作模式	發射/接收 802.11g	調變技術	OFDM-MIMO
基本波頻率	CH 6 : 2437 MHz	測試日期	110 年 07 月 20 日
量測場地溫度	25°C	量測場地濕度	75%RH
測試者	吳承翰		

		6 dB Bandwidth: 9kHz				PHASE: LINE (L)			
輻射頻率	校正因子	儀器讀值		結果值		限制值		餘裕度	
[MHz]	[dB]	[dB (uV)]		[dB (uV)]		[dB (uV)]		[dB]	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.40179	9.83	35.14	14.63	44.97	24.46	57.82	47.82	-12.85	-23.36
0.43800	9.84	38.27	11.04	48.11	20.88	57.10	47.10	-8.99	-26.22
0.52600	9.85	36.94	15.66	46.79	25.51	56.00	46.00	-9.21	-20.49
1.51400	9.93	30.29	13.36	40.22	23.29	56.00	46.00	-15.78	-22.71
6.99000	10.02	30.45	20.29	40.47	30.31	60.00	50.00	-19.53	-19.69
9.40200	10.05	31.58	21.27	41.63	31.32	60.00	50.00	-18.37	-18.68

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

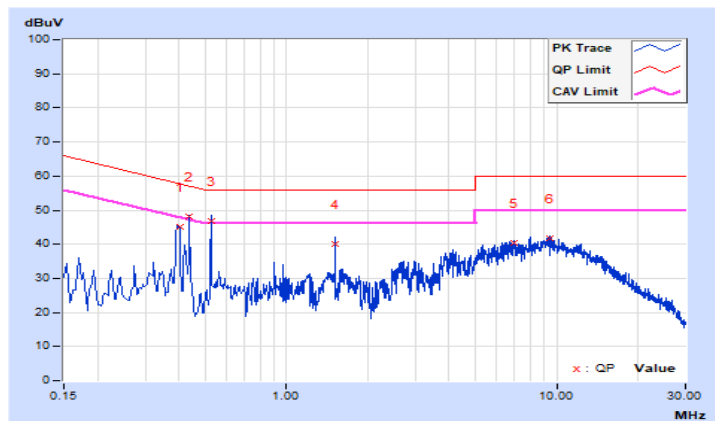


操作模式	發射/接收 802.11g	調變技術	OFDM-MIMO
基本波頻率	CH 6 : 2437 MHz	測試日期	110 年 07 月 20 日
量測場地溫度	25°C	量測場地濕度	75%RH
測試者	吳承翰		

輻射頻率 [MHz]	校正因子 [dB]	6 dB Bandwidth: 9kHz				PHASE: NEUTRAL (N)			
		儀器讀值		結果值		限制值		餘裕度	
		[dB (uV)]		[dB (uV)]		[dB (uV)]		[dB]	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.39000	9.90	30.45	26.40	40.35	36.30	58.06	48.06	-17.71	-11.76
0.42600	9.90	28.07	22.32	37.97	32.22	57.33	47.33	-19.36	-15.11
0.50600	9.91	33.79	4.69	43.70	14.60	56.00	46.00	-12.30	-31.40
0.55000	9.92	28.54	8.61	38.46	18.53	56.00	46.00	-17.54	-27.47
0.58200	9.92	32.51	9.68	42.43	19.60	56.00	46.00	-13.57	-26.40
2.21400	10.00	27.59	7.20	37.59	17.20	56.00	46.00	-18.41	-28.80

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

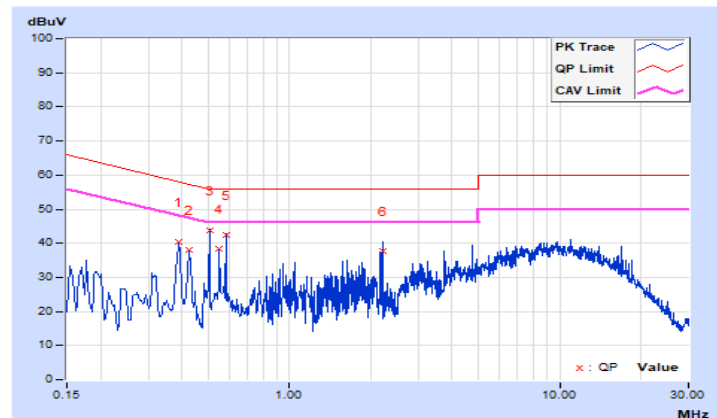

5.7 量測結果判定

依據測試數據結果，符合低功率射頻器材技術規範之要求。

5.8 配置照片

請參閱附件測試設置照片(BV CPS 報告編號：BCWK-WTW-P21050819_TSup)。

6 發射(6 dB)頻寬之要求

6.1 適用標準

請見本報告3.1節第5項(I)的規定。

6.2 量測方法


- 將待測物輸出經由衰減器接到頻譜分析儀上。
- 設定待測物處於連續發射狀態。
- 計算由最大輸出功率峰值減6dB的最大頻率範圍。

6.3 量測儀器

儀器名稱 (廠牌/製造商)	型號	序號	校正日期	下次校正日期
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Sep. 16, 2020	Sep. 15, 2021

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The measurement uncertainty is 207Hz, which is calculated as per the document ETSI TR 100 028. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

6.4 測試配置



6.5 量測結果

操作模式	發射	測試日期	110 年 08 月 04 日
量測場地溫度	25°C	量測場地濕度	60%RH
測試者	吳宗霖、王紀維		

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	8.08	8.08	0.50	Pass
6	2437	8.07	8.09	0.50	Pass
11	2462	8.08	8.08	0.50	Pass

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	15.31	15.17	0.50	Pass
6	2437	15.18	15.15	0.50	Pass
11	2462	15.32	15.17	0.50	Pass


802.11ax (HE20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	18.75	18.69	0.50	Pass
6	2437	18.78	18.54	0.50	Pass
11	2462	18.74	18.87	0.50	Pass

802.11ax (HE40)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	36.97	37.70	0.50	Pass
6	2437	37.85	37.30	0.50	Pass
9	2452	37.62	37.39	0.50	Pass

**此測試圖僅放測試結果最差的頻道。

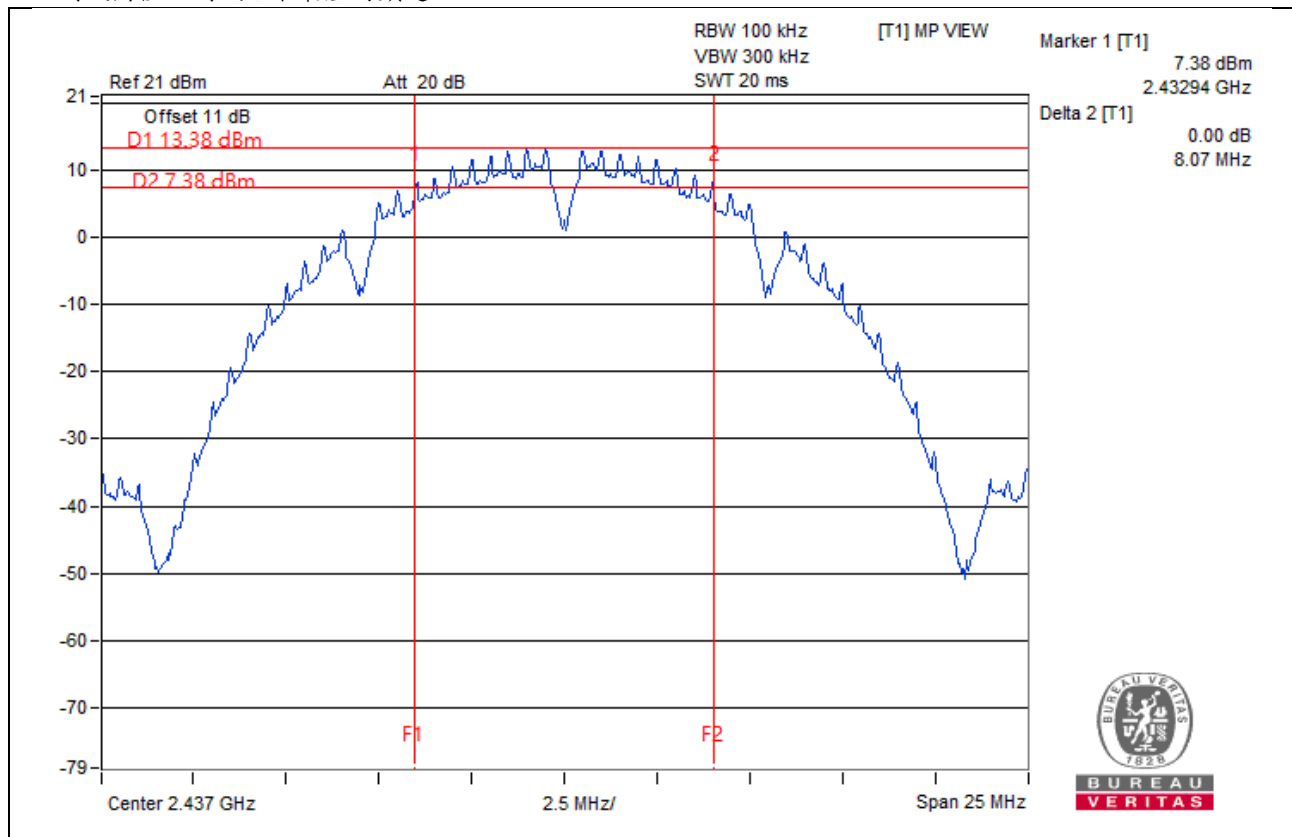

6.6 量測結果判定

依據測試數據結果，符合低功率射頻器材技術規範之要求。

7 峰值傳導輸出功率之量測

7.1 適用標準

請見本報告3.1節第6項(I)及4項(I)的規定。

7.2 量測方法


- 將待測物輸出經由衰減器接到功率計上 (Average Detector with Gating Function)。
- 設定待測物處於連續發射狀態。
- 計算其輸出功率峰值。

7.3 量測儀器

儀器名稱 (廠牌/製造商)	型號	序號	校正日期	下次校正日期
USB Wideband Power Sensor KEYSIGHT	U2021XA	MY55050005/MY55190004/MY55210005	Jul. 12, 2021	Jul. 11, 2022
Peak Power Analyzer KEYSIGHT	8990B	MY51000485	Jan. 19, 2021	Jan. 18, 2022

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The measurement uncertainty is 1.393dB, which is calculated as per the document ETSI TR 100 028. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

7.4 測試配置

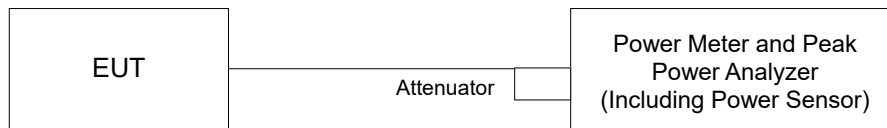

7.5 量測結果

操作模式	發射	測試日期	110 年 08 月 04 日
量測場地溫度	25°C	量測場地濕度	60%RH
測試者	吳宗霖、王紀維		

CDD Mode

802.11b

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	21.68	21.46	287.190	24.58	30.00	Pass
6	2437	22.05	21.74	309.604	24.91	30.00	Pass
11	2462	21.53	21.67	289.126	24.61	30.00	Pass

802.11g

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	18.41	18.37	138.049	21.40	30.00	Pass
6	2437	24.61	24.67	582.157	27.65	30.00	Pass
11	2462	14.35	14.53	55.606	17.45	30.00	Pass

802.11n (HT20)

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	15.49	15.49	70.799	18.50	30.00	Pass
6	2437	23.96	23.72	484.391	26.85	30.00	Pass
11	2462	14.62	14.78	59.034	17.71	30.00	Pass

802.11n (HT40)

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	13.54	13.39	44.422	16.48	30.00	Pass
6	2437	17.33	17.32	108.026	20.34	30.00	Pass
9	2452	12.48	12.43	35.200	15.47	30.00	Pass

VHT20

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	15.65	15.67	73.626	18.67	30.00	Pass
6	2437	24.14	23.89	504.324	27.03	30.00	Pass
11	2462	14.78	14.94	61.250	17.87	30.00	Pass

VHT40

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	13.71	13.54	46.091	16.64	30.00	Pass
6	2437	17.48	17.49	112.081	20.50	30.00	Pass
9	2452	12.63	12.57	36.395	15.61	30.00	Pass

802.11ax (HE20)

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	15.78	15.78	75.689	18.79	30.00	Pass
6	2437	24.26	24.01	518.454	27.15	30.00	Pass
11	2462	14.91	15.06	63.037	18.00	30.00	Pass

802.11ax (HE40)

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	13.84	13.68	47.545	16.77	30.00	Pass
6	2437	17.62	17.62	115.619	20.63	30.00	Pass
9	2452	12.78	12.72	37.674	15.76	30.00	Pass

Beamforming Mode

802.11n (HT20)

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	15.49	15.49	70.799	18.50	30.00	Pass
6	2437	23.96	23.72	484.391	26.85	30.00	Pass
11	2462	14.62	14.78	59.034	17.71	30.00	Pass

Note: Directional gain = $1.81\text{dBi} + 10\log(2) = 4.82\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.

802.11n (HT40)

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	13.54	13.39	44.422	16.48	30.00	Pass
6	2437	17.33	17.32	108.026	20.34	30.00	Pass
9	2452	12.48	12.43	35.200	15.47	30.00	Pass

Note: Directional gain = $1.81\text{dBi} + 10\log(2) = 4.82\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.

VHT20

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	15.65	15.67	73.626	18.67	30.00	Pass
6	2437	24.14	23.89	504.324	27.03	30.00	Pass
11	2462	14.78	14.94	61.250	17.87	30.00	Pass

Note: Directional gain = $1.81\text{dBi} + 10\log(2) = 4.82\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.

VHT40

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	13.71	13.54	46.091	16.64	30.00	Pass
6	2437	17.48	17.49	112.081	20.50	30.00	Pass
9	2452	12.63	12.57	36.395	15.61	30.00	Pass

Note: Directional gain = $1.81\text{dBi} + 10\log(2) = 4.82\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.

802.11ax (HE20)

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	15.78	15.78	75.689	18.79	30.00	Pass
6	2437	24.26	24.01	518.454	27.15	30.00	Pass
11	2462	14.91	15.06	63.037	18.00	30.00	Pass

Note: Directional gain = $1.81\text{dBi} + 10\log(2) = 4.82\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.

802.11ax (HE40)

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	13.84	13.68	47.545	16.77	30.00	Pass
6	2437	17.62	17.62	115.619	20.63	30.00	Pass
9	2452	12.78	12.72	37.674	15.76	30.00	Pass

Note: Directional gain = $1.81\text{dBi} + 10\log(2) = 4.82\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.

7.6 量測結果判定

依據測試數據結果，符合低功率射頻器材技術規範之要求。

8 功率頻譜密度之量測

8.1 適用標準

請見本報告3.1節第7項(I)的規定。

8.2 量測方法


- 將待測物之天線埠連接至測試儀器。
- 設定解析頻寬為 3kHz，視訊頻寬為 10kHz，掃描時間設為自動，直至掃描信號穩定。
- 使用 RMS 功能鍵，並找到最大的峰值準位。

8.3 量測儀器

儀器名稱 (廠牌/製造商)	型號	序號	校正日期	下次校正日期
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Sep. 16, 2020	Sep. 15, 2021

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The measurement uncertainty is 207Hz, which is calculated as per the document ETSI TR 100 028. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

8.4 測試配置

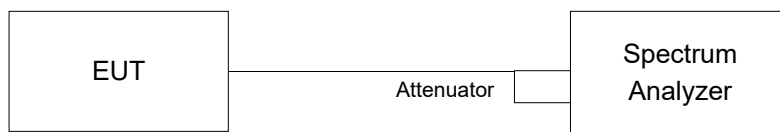

8.5 量測結果

操作模式	發射	測試日期	110 年 08 月 04 日
量測場地溫度	25°C	量測場地濕度	60%RH
測試者	吳宗霖、王紀維		

802.11b

TX chain	Channel	Frequency (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
0	1	2412	-12.60	3.01	-9.59	8.00	Pass
	6	2437	-9.92	3.01	-6.91	8.00	Pass
	11	2462	-10.63	3.01	-7.62	8.00	Pass
1	1	2412	-10.34	3.01	-7.33	8.00	Pass
	6	2437	-10.42	3.01	-7.41	8.00	Pass
	11	2462	-10.77	3.01	-7.76	8.00	Pass

Note:

- Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure value and add 10 log (N_{ANT}) dB.
- Directional gain = 1.81dBi + 10log(2) = 4.82dBi < 6dBi, so the power density limit not need to reduce.

802.11g

TX chain	Channel	Frequency (MHz)	PSD w/o Duty Factor (dBm/3kHz)	10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
0	1	2412	-18.33	3.01	0.24	-15.08	8.00	Pass
	6	2437	-11.92	3.01	0.24	-8.67	8.00	Pass
	11	2462	-20.15	3.01	0.24	-16.90	8.00	Pass
1	1	2412	-17.94	3.01	0.24	-14.69	8.00	Pass
	6	2437	-11.31	3.01	0.24	-8.06	8.00	Pass
	11	2462	-20.45	3.01	0.24	-17.20	8.00	Pass

Note:

- Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure value and add 10 log (N_{ANT}) dB.
- Directional gain = 1.81dBi + 10log(2) = 4.82dBi < 6dBi, so the power density limit not need to reduce.
- Refer to section 2.1 for duty cycle spectrum plot.

802.11ax (HE20)

TX chain	Channel	Frequency (MHz)	PSD w/o Duty Factor (dBm/3kHz)	10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
0	1	2412	-21.76	3.01	0.54	-18.21	8.00	Pass
	6	2437	-12.99	3.01	0.54	-9.44	8.00	Pass
	11	2462	-22.42	3.01	0.54	-18.87	8.00	Pass
1	1	2412	-21.54	3.01	0.54	-17.99	8.00	Pass
	6	2437	-13.06	3.01	0.54	-9.51	8.00	Pass
	11	2462	-21.14	3.01	0.54	-17.59	8.00	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure value and add $10 \log (N_{ANT})$ dB.
2. Directional gain = $1.81\text{dBi} + 10\log(2) = 4.82\text{dBi} < 6\text{dBi}$, so the power density limit not need to reduce.
3. Refer to section 2.1 for duty cycle spectrum plot.


802.11ax (HE40)

TX chain	Channel	Frequency (MHz)	PSD w/o Duty Factor (dBm/3kHz)	10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
0	3	2422	-24.29	3.01	0.92	-20.36	8.00	Pass
	6	2437	-21.32	3.01	0.92	-17.39	8.00	Pass
	9	2452	-26.29	3.01	0.92	-22.36	8.00	Pass
1	3	2422	-24.56	3.01	0.92	-20.63	8.00	Pass
	6	2437	-21.32	3.01	0.92	-17.39	8.00	Pass
	9	2452	-26.61	3.01	0.92	-22.68	8.00	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure value and add $10 \log (N_{ANT})$ dB.
2. Directional gain = $1.81\text{dBi} + 10\log(2) = 4.82\text{dBi} < 6\text{dBi}$, so the power density limit not need to reduce.
3. Refer to section 2.1 for duty cycle spectrum plot.

**此測試圖僅放測試結果最差的頻道。

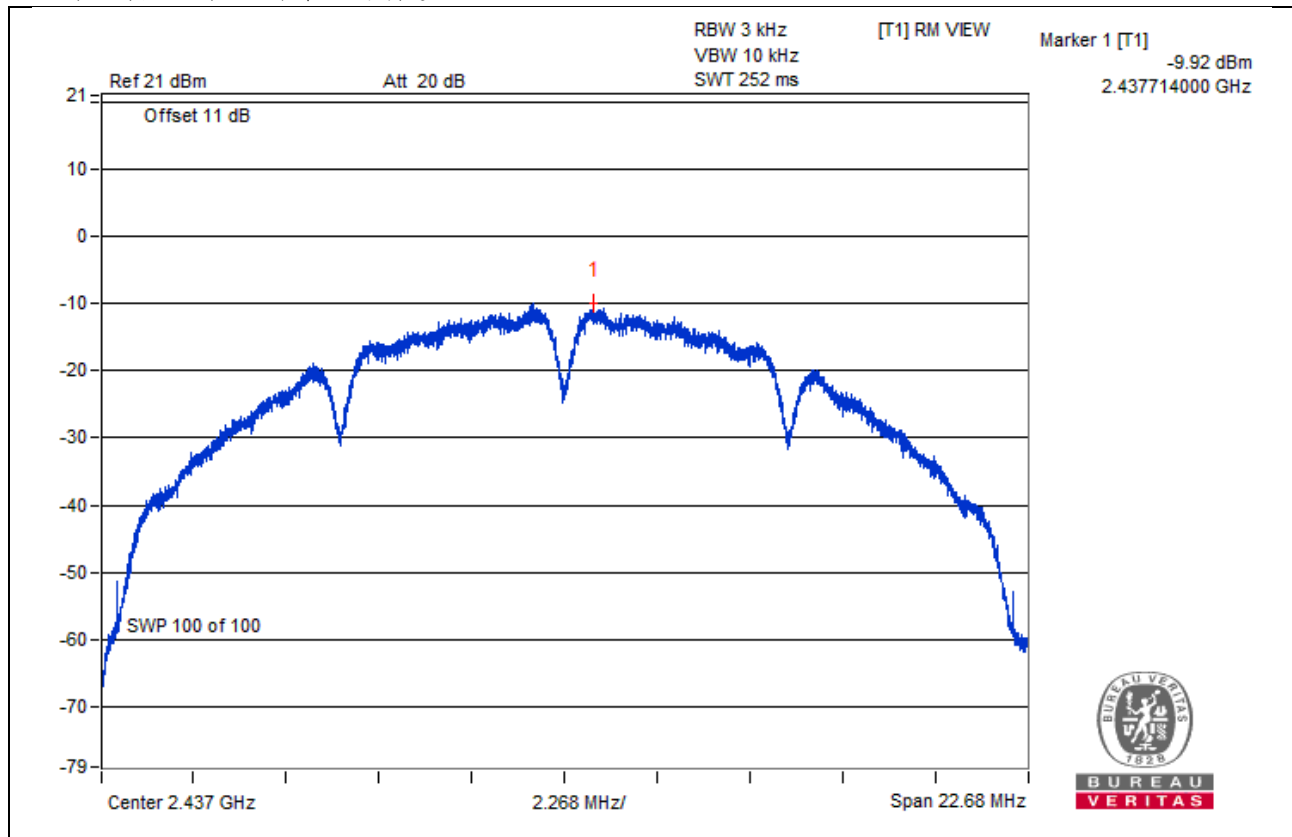

8.6 量測結果判定

依據測試數據結果，符合低功率射頻器材技術規範之要求。

U-NII 頻段測試紀錄結果

9 帶外發射之量測

9.1 適用標準

待測物操作頻帶	適用標準
☒ 5.15 GHz~5.25 GHz	請見本報告 3.1 節第 2 項(II)的規定
☐ 5.25 GHz~5.35 GHz	請見本報告 3.1 節第 2 項(II)的規定
☐ 5.470 GHz~5.725 GHz	請見本報告 3.1 節第 2 項(II)的規定
☒ 5.725 GHz~5.850 GHz	請見本報告 3.1 節第 2 項(III)的規定

9.2 量測方法

在電波暗室，將待測物置於0.8米高的非金屬桌面，使其操作在工作狀態。接收天線置於3米距離。桌面要360度旋轉，另外接收天線從離地1米至4米升降變化，以找出最大的輻射電場強度，接收天線分別置於水平、垂直極化各執行測試一次。

Note: 對於 1GHz 以上場強輻射的測試，待測物則置於1.5米高的非金屬桌面。

9.3 量測儀器

同4.3節。

9.4 測試配置

同4.4節。

9.5 場強度之計算

場強之計算公式如下：

結果值Emission level (dBuV/m)=機器讀值 Raw Value (dBuV) +校正因子Correction Factor (dB/m)

餘裕度Margin(dB)= 結果值Emission level (dBuV/m)-限制值Limit value (dBuV/m)

*有效等向輻射功率限制值轉換場強值如下：

Applicable To		Limit	
技術規範 5.7.4.6 節不必要發射頻率屬 3.5 節規定頻段者，應符合 3.6 節之規定		Field Strength at 3m	
		PK:74 (dBμV/m)	AV:54 (dBμV/m)
操作頻帶	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	技術規範 5.7.4.1 節	PK:-27 (dBm/MHz)	PK:68.2(dBμV/m)
5250~5350 MHz	技術規範 5.7.4.1 節		
5470~5725 MHz	技術規範 5.7.4.1 節		
5725~5850 MHz	技術規範 5.7.4.2 節	PK:-27 (dBm/MHz) ^{*1} PK:10 (dBm/MHz) ^{*2} PK:15.6 (dBm/MHz) ^{*3} PK:27 (dBm/MHz) ^{*4}	PK: 68.2(dBμV/m) ^{*1} PK:105.2 (dBμV/m) ^{*2} PK: 110.8(dBμV/m) ^{*3} PK:122.2 (dBμV/m) ^{*4}
^{*1} beyond 75 MHz or more above of the band edge. ^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.		^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above. ^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

Note:

有效等向輻射功率限制值轉換場強之公式如下：

$$E=(30PG)^{1/2}/d$$

E: 以最寬解析頻寬所測得之最大場強值，單位:V/m。

G: 發射天線相對於全向性輻射器之數值增益。

d: 測試場強的距離，單位: m。

P: 求得之功率，單位:W。

量測結果請見下頁。

9.6 量測結果


9.6.1 發射諧波

操作模式：	發射 802.11a	調變技術：	OFDM-MIMO
基本波頻率：	CH 36：5180 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 16 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.2 PK	74.0	-13.8	1.48 H	72	47.2	13.0
2	5150.00	49.2 AV	54.0	-4.8	1.48 H	72	36.2	13.0
3	*5180.00	111.5 PK			1.48 H	72	69.0	42.5
4	*5180.00	103.2 AV			1.48 H	72	60.7	42.5
5	#10360.00	60.5 PK	68.2	-7.7	2.31 H	142	38.0	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

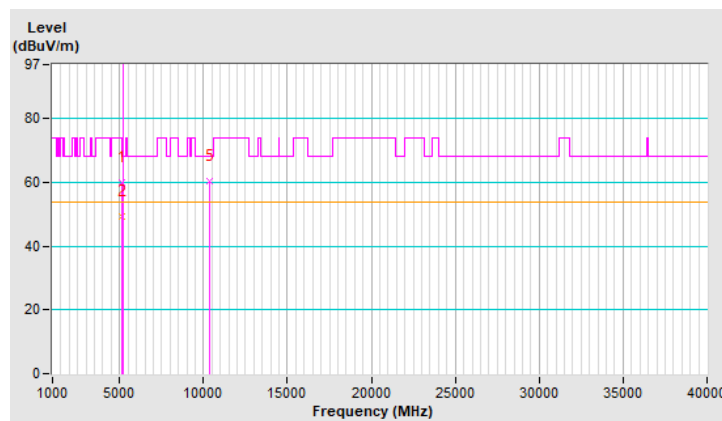


操作模式：	發射 802.11a	調變技術：	OFDM-MIMO
基本波頻率：	CH 36 : 5180 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 14 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.9 PK	74.0	-8.1	1.57 V	340	52.9	13.0
2	5150.00	52.7 AV	54.0	-1.3	1.57 V	340	39.7	13.0
3	*5180.00	118.7 PK			1.57 V	340	76.2	42.5
4	*5180.00	109.6 AV			1.57 V	340	67.1	42.5
5	#10360.00	60.6 PK	68.2	-7.6	1.66 V	243	38.1	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

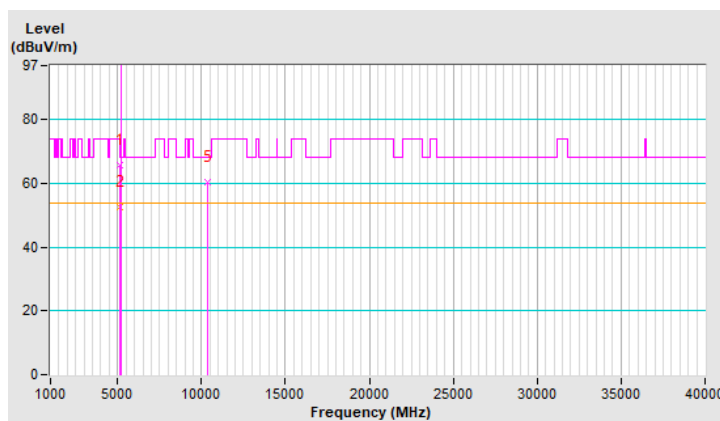


操作模式：	發射 802.11a	調變技術：	OFDM-MIMO
基本波頻率：	CH 40 : 5200 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 16 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	114.4 PK			1.48 H	71	72.0	42.4
2	*5200.00	105.4 AV			1.48 H	71	63.0	42.4
3	#10400.00	60.7 PK	68.2	-7.5	2.35 H	142	37.9	22.8
4	15600.00	-	-	-	-	-	-	-
5	20800.00	-	-	-	-	-	-	-
6	#26000.00	-	-	-	-	-	-	-
7	31200.00	-	-	-	-	-	-	-
8	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

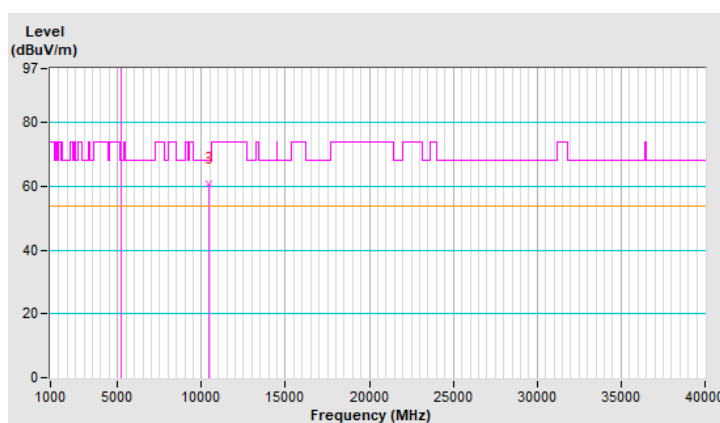


操作模式：	發射 802.11a	調變技術：	OFDM-MIMO
基本波頻率：	CH 40 : 5200 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 14 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	122.1 PK			1.69 V	340	79.7	42.4
2	*5200.00	112.5 AV			1.69 V	340	70.1	42.4
3	#10400.00	61.0 PK	68.2	-7.2	1.75 V	232	38.2	22.8
4	15600.00	-	-	-	-	-	-	-
5	20800.00	-	-	-	-	-	-	-
6	#26000.00	-	-	-	-	-	-	-
7	31200.00	-	-	-	-	-	-	-
8	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

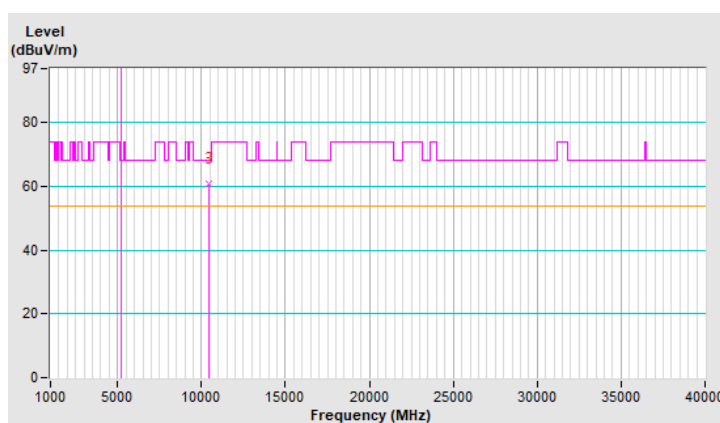


操作模式：	發射 802.11a	調變技術：	OFDM-MIMO
基本波頻率：	CH 48 : 5240 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 16 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	113.4 PK			1.39 H	69	71.0	42.4
2	*5240.00	104.4 AV			1.39 H	69	62.0	42.4
3	5350.00	59.0 PK	74.0	-15.0	1.39 H	69	45.9	13.1
4	5350.00	48.3 AV	54.0	-5.7	1.39 H	69	35.2	13.1
5	#10480.00	61.1 PK	68.2	-7.1	2.68 H	155	38.3	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

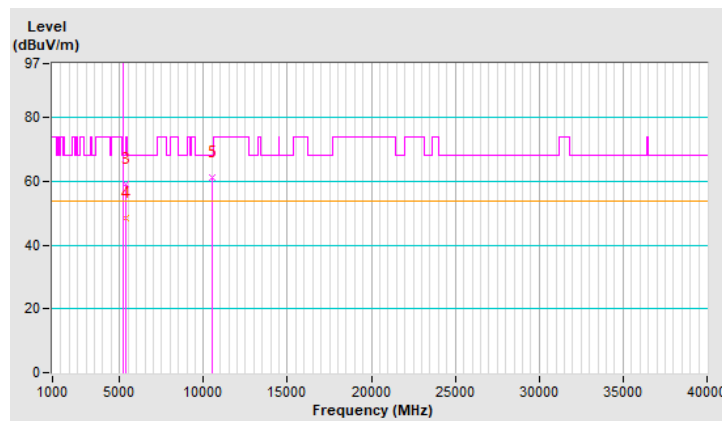


操作模式：	發射 802.11a	調變技術：	OFDM-MIMO
基本波頻率：	CH 48 : 5240 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 14 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	120.8 PK			1.44 V	340	78.4	42.4
2	*5240.00	112.2 AV			1.44 V	340	69.8	42.4
3	5350.00	58.5 PK	74.0	-15.5	1.44 V	340	45.4	13.1
4	5350.00	48.6 AV	54.0	-5.4	1.44 V	340	35.5	13.1
5	#10480.00	61.6 PK	68.2	-6.6	1.73 V	228	38.8	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

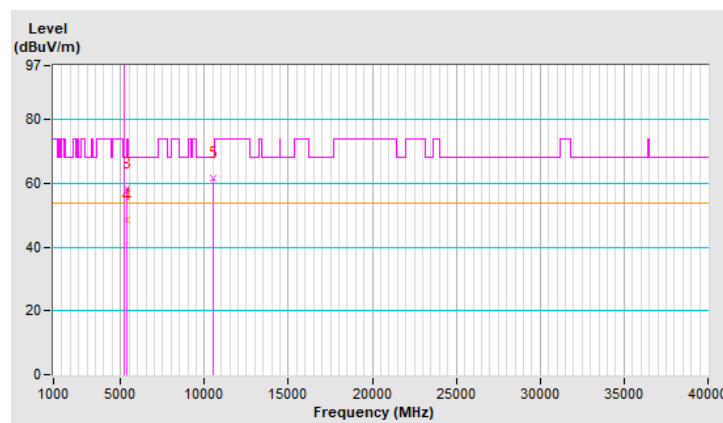


操作模式：	發射 802.11a	調變技術：	OFDM-MIMO
基本波頻率：	CH 149 : 5745 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	116.3 PK			1.74 H	263	72.6	43.7
2	*5745.00	108.2 AV			1.74 H	263	64.5	43.7
3	11490.00	62.7 PK	74.0	-11.3	1.34 H	189	37.6	25.1
4	11490.00	51.6 AV	54.0	-2.4	1.34 H	189	26.5	25.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency (主頻).
6. " # " : The radiated frequency is out of the restricted band.
7. " - " : The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

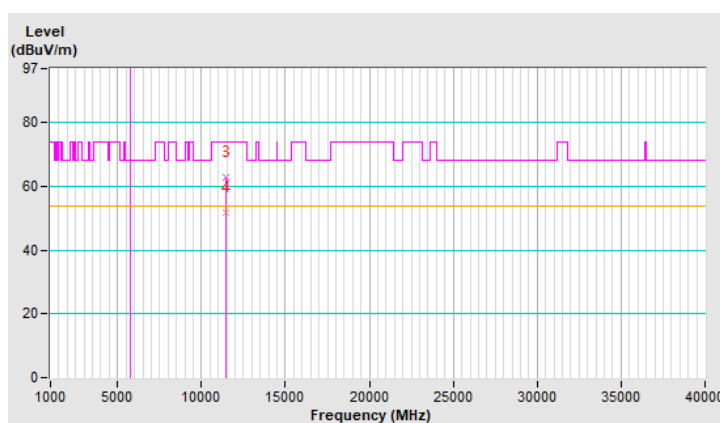


操 作 模 式 :	發射 802.11a	調 變 技 術 :	OFDM-MIMO
基 本 波 頻 率 :	CH 149 : 5745 MHz	檢 測 器 與 頻 寬 :	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量 測 場 地 溫 度 :	25 °C	量 測 場 地 濕 度 :	70% RH
測 試 日 期 :	110 年 07 月 16 日	測 試 者 :	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	124.0 PK			1.40 V	348	80.3	43.7
2	*5745.00	115.6 AV			1.40 V	348	71.9	43.7
3	11490.00	63.5 PK	74.0	-10.5	2.63 V	100	38.4	25.1
4	11490.00	51.8 AV	54.0	-2.2	2.63 V	100	26.7	25.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency (主頻).
6. " # " : The radiated frequency is out of the restricted band.
7. " - " : The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

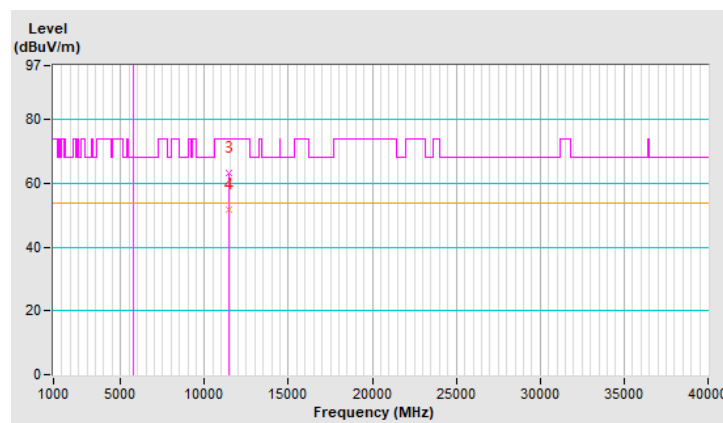


操作模式：	發射 802.11a	調變技術：	OFDM-MIMO
基本波頻率：	CH 149 : 5745 MHz (OOBE)	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5604.40	62.6 PK	68.2	-5.6	1.74 H	263	49.0	13.6
2	#5938.00	64.2 PK	68.2	-4.0	1.74 H	263	49.8	14.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

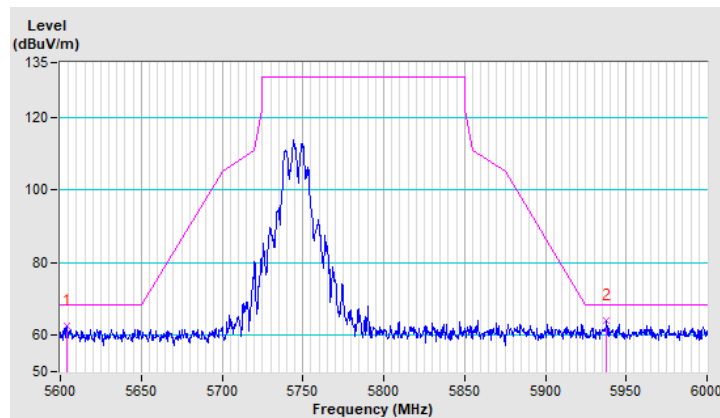


操作模式：	發射 802.11a	調變技術：	OFDM-MIMO
基本波頻率：	CH 149 : 5745 MHz (OOBE)	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 16 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5627.60	63.2 PK	68.2	-5.0	1.40 V	348	49.5	13.7
2	#5995.20	63.8 PK	68.2	-4.4	1.40 V	348	49.3	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

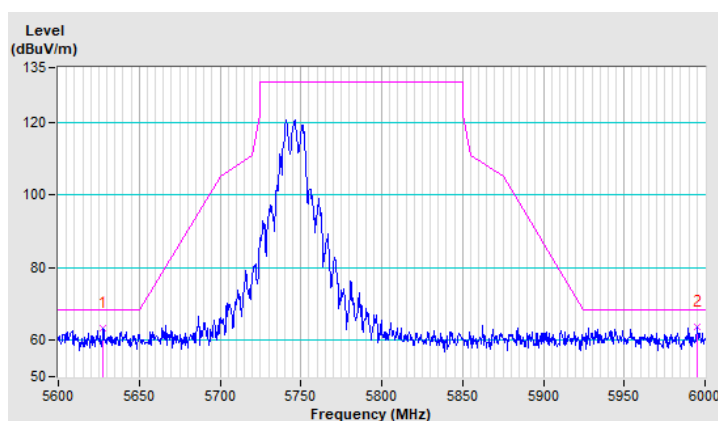


操作模式：	發射 802.11a	調變技術：	OFDM-MIMO
基本波頻率：	CH 157 : 5785 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	116.1 PK			1.75 H	266	72.1	44.0
2	*5785.00	108.0 AV			1.75 H	266	64.0	44.0
3	11570.00	62.5 PK	74.0	-11.5	1.42 H	215	37.5	25.0
4	11570.00	51.4 AV	54.0	-2.6	1.42 H	215	26.4	25.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

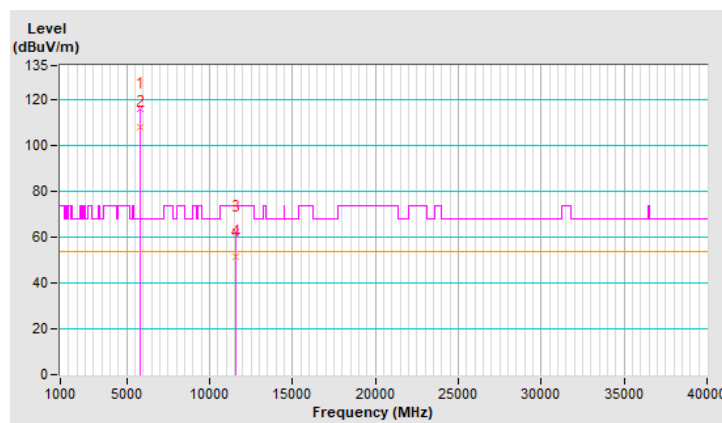


操作模式：	發射 802.11a	調變技術：	OFDM-MIMO
基本波頻率：	CH 157 : 5785 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 16 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	124.0 PK			1.38 V	338	80.0	44.0
2	*5785.00	115.0 AV			1.38 V	338	71.0	44.0
3	11570.00	63.6 PK	74.0	-10.4	2.43 V	115	38.6	25.0
4	11570.00	51.5 AV	54.0	-2.5	2.43 V	115	26.5	25.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency (主頻).
6. " # " : The radiated frequency is out of the restricted band.
7. " - " : The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

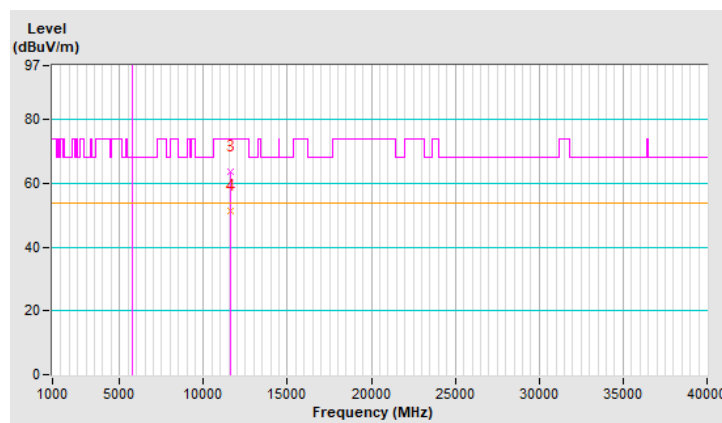


操作模式：	發射 802.11a	調變技術：	OFDM-MIMO
基本波頻率：	CH 157 : 5785 MHz (OOBE)	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5649.60	63.6 PK	68.2	-4.6	1.75 H	266	50.0	13.6
2	#5989.60	64.0 PK	68.2	-4.2	1.75 H	266	49.5	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

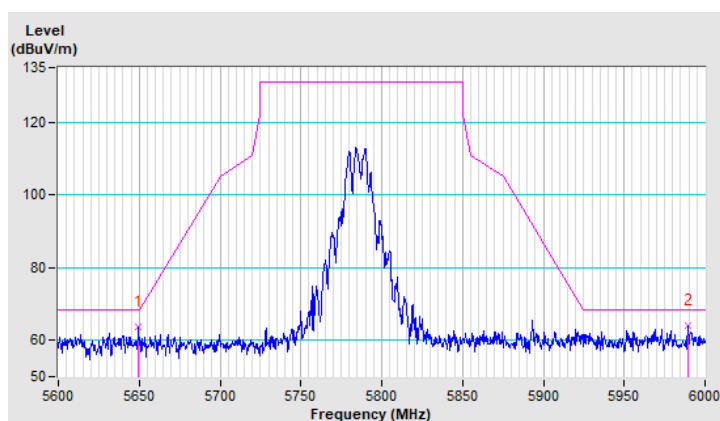


操作模式：	發射 802.11a	調變技術：	OFDM-MIMO
基本波頻率：	CH 157 : 5785 MHz (OOBE)	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 16 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5634.40	62.9 PK	68.2	-5.3	1.38 V	338	49.2	13.7
2	#5978.40	64.3 PK	68.2	-3.9	1.38 V	338	49.8	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

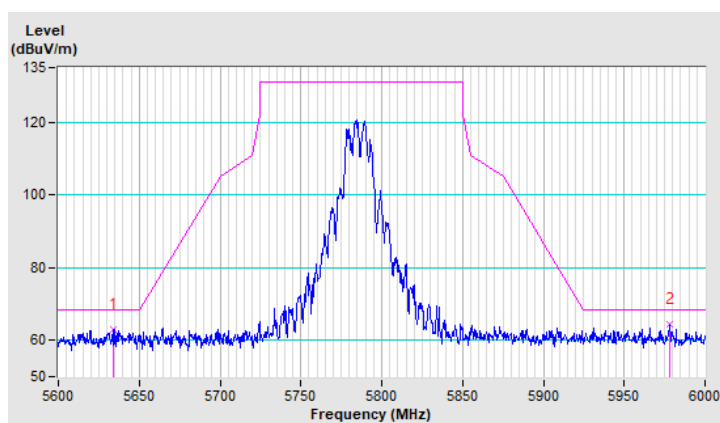


操作模式：	發射 802.11a	調變技術：	OFDM-MIMO
基本波頻率：	CH 165 : 5825 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	115.5 PK			1.64 H	266	71.5	44.0
2	*5825.00	107.3 AV			1.64 H	266	63.3	44.0
3	11650.00	62.3 PK	74.0	-11.7	1.50 H	196	37.6	24.7
4	11650.00	51.3 AV	54.0	-2.7	1.50 H	196	26.6	24.7
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency (主頻).
6. " # " : The radiated frequency is out of the restricted band.
7. " - " : The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

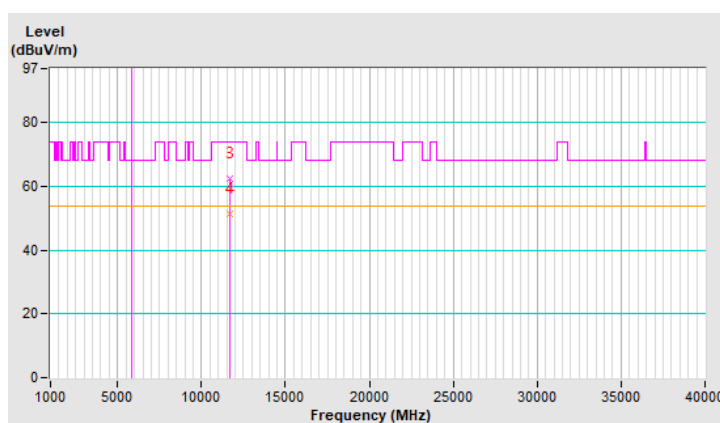


操作模式：	發射 802.11a	調變技術：	OFDM-MIMO
基本波頻率：	CH 165 : 5825 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=1kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 16 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	123.7 PK			1.42 V	354	79.7	44.0
2	*5825.00	114.8 AV			1.42 V	354	70.8	44.0
3	11650.00	63.0 PK	74.0	-11.0	2.54 V	87	38.3	24.7
4	11650.00	51.5 AV	54.0	-2.5	2.54 V	87	26.8	24.7
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency (主頻).
6. " # " : The radiated frequency is out of the restricted band.
7. " - " : The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

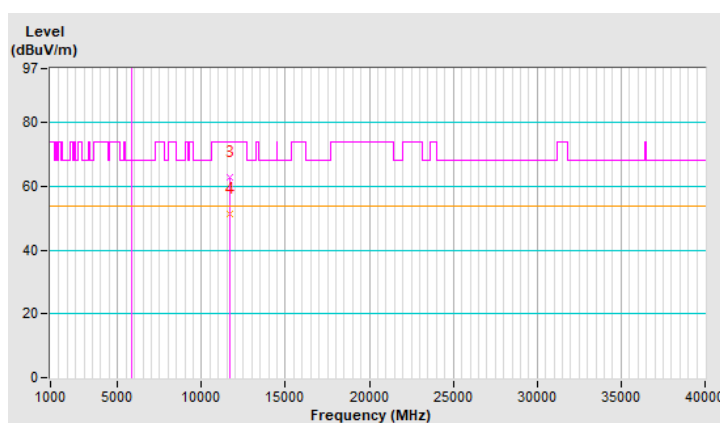


操作模式：	發射 802.11a	調變技術：	OFDM-MIMO
基本波頻率：	CH 165 : 5825 MHz (OOBE)	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5621.60	63.5 PK	68.2	-4.7	1.64 H	266	49.8	13.7
2	#5963.20	63.2 PK	68.2	-5.0	1.64 H	266	48.7	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

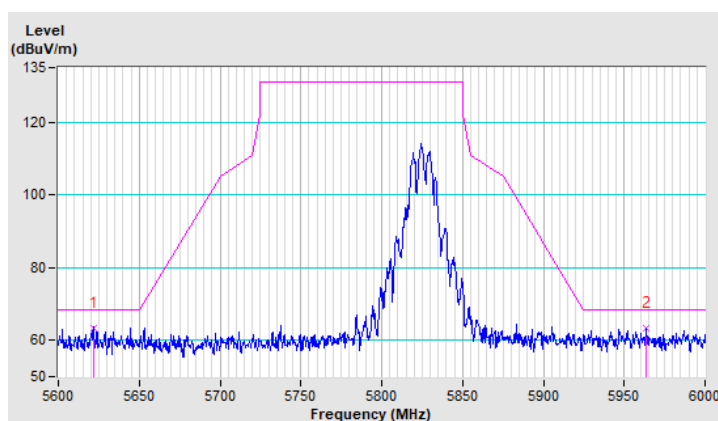


操作模式：	發射 802.11a	調變技術：	OFDM-MIMO
基本波頻率：	CH 165 : 5825 MHz (OOBE)	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 16 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5613.60	64.9 PK	68.2	-3.3	1.42 V	354	51.3	13.6
2	#5957.60	65.0 PK	68.2	-3.2	1.42 V	354	50.5	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

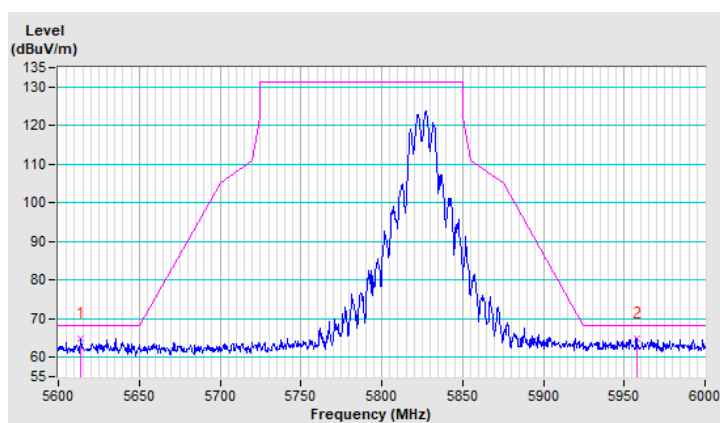


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 36 : 5180 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 16 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.9 PK	74.0	-13.1	1.43 H	70	47.9	13.0
2	5150.00	48.4 AV	54.0	-5.6	1.43 H	70	35.4	13.0
3	*5180.00	111.4 PK			1.43 H	70	68.9	42.5
4	*5180.00	101.3 AV			1.43 H	70	58.8	42.5
5	#10360.00	60.7 PK	68.2	-7.5	1.42 H	353	38.2	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

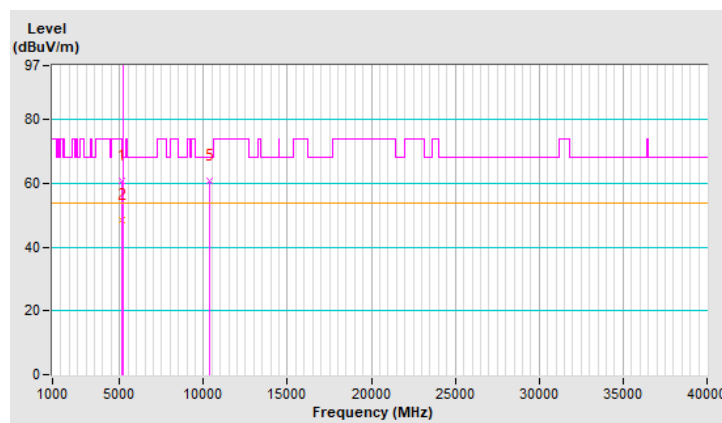


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 36 : 5180 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 14 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.6 PK	74.0	-7.4	1.47 V	339	53.6	13.0
2	5150.00	52.9 AV	54.0	-1.1	1.47 V	339	39.9	13.0
3	*5180.00	116.7 PK			1.47 V	339	74.2	42.5
4	*5180.00	107.3 AV			1.47 V	339	64.8	42.5
5	#10360.00	61.1 PK	68.2	-7.1	1.73 V	235	38.6	22.5
6	15540.00	-	-	-	-	-	-	-
7	20720.00	-	-	-	-	-	-	-
8	#25900.00	-	-	-	-	-	-	-
9	#31080.00	-	-	-	-	-	-	-
10	#36260.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

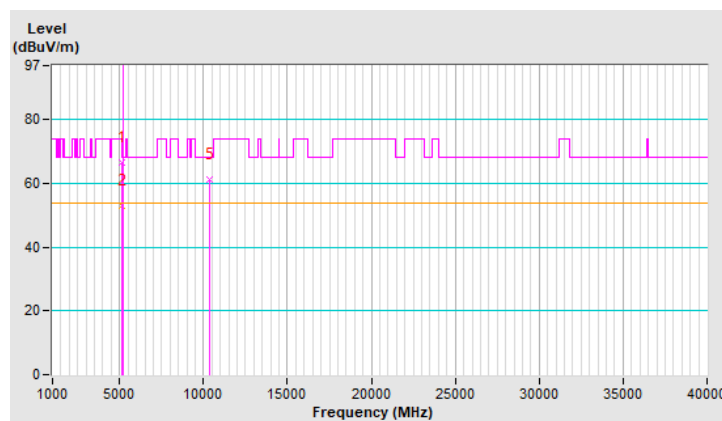


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 40 : 5200 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 16 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	114.2 PK			1.46 H	71	71.8	42.4
2	*5200.00	104.2 AV			1.46 H	71	61.8	42.4
3	#10400.00	61.2 PK	68.2	-7.0	1.62 H	4	38.4	22.8
4	15600.00	-	-	-	-	-	-	-
5	20800.00	-	-	-	-	-	-	-
6	#26000.00	-	-	-	-	-	-	-
7	31200.00	-	-	-	-	-	-	-
8	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

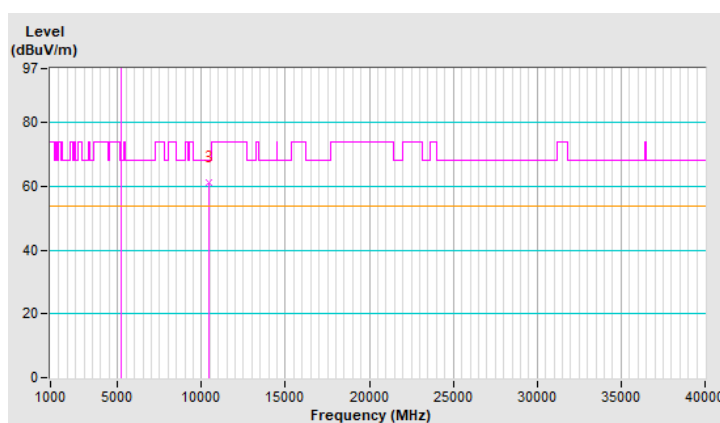


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 40 : 5200 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 15 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	121.0 PK			1.49 V	354	78.6	42.4
2	*5200.00	110.9 AV			1.49 V	354	68.5	42.4
3	#10400.00	61.5 PK	68.2	-6.7	1.69 V	232	38.7	22.8
4	15600.00	-	-	-	-	-	-	-
5	20800.00	-	-	-	-	-	-	-
6	#26000.00	-	-	-	-	-	-	-
7	31200.00	-	-	-	-	-	-	-
8	#36400.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency (主頻).
6. " # " : The radiated frequency is out of the restricted band.
7. " - " : The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

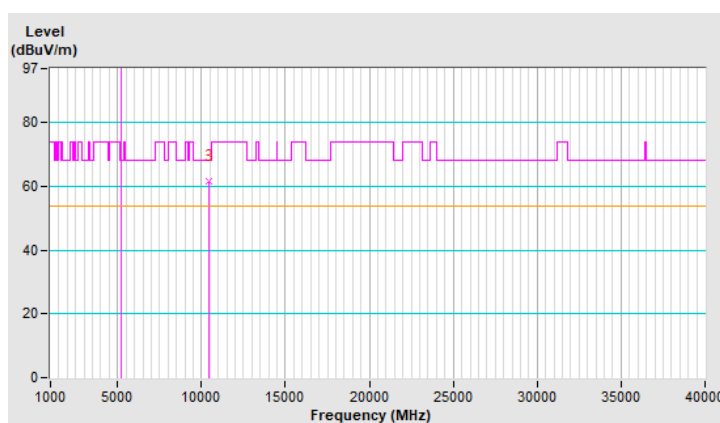


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 48 : 5240 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 16 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	115.4 PK			1.38 H	70	73.0	42.4
2	*5240.00	104.7 AV			1.38 H	70	62.3	42.4
3	5350.00	59.6 PK	74.0	-14.4	1.38 H	70	46.5	13.1
4	5350.00	48.1 AV	54.0	-5.9	1.38 H	70	35.0	13.1
5	#10480.00	60.5 PK	68.2	-7.7	1.50 H	358	37.7	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

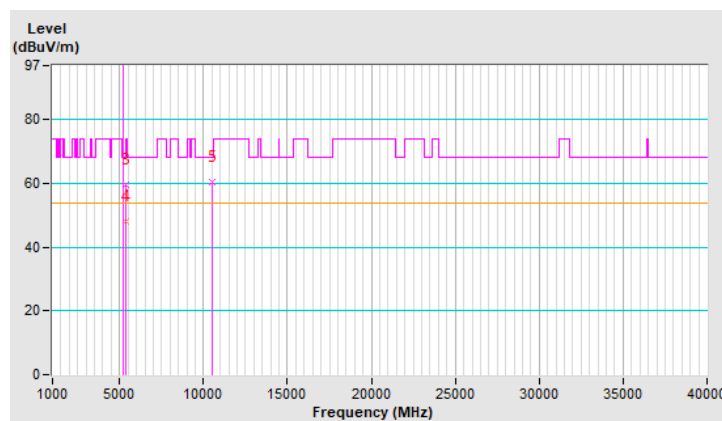


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 48 : 5240 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 15 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	121.2 PK			1.53 V	339	78.8	42.4
2	*5240.00	111.6 AV			1.53 V	339	69.2	42.4
3	5350.00	58.3 PK	74.0	-15.7	1.53 V	339	45.2	13.1
4	5350.00	48.5 AV	54.0	-5.5	1.53 V	339	35.4	13.1
5	#10480.00	61.4 PK	68.2	-6.8	1.71 V	225	38.6	22.8
6	15720.00	-	-	-	-	-	-	-
7	20960.00	-	-	-	-	-	-	-
8	#26200.00	-	-	-	-	-	-	-
9	31440.00	-	-	-	-	-	-	-
10	#36680.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

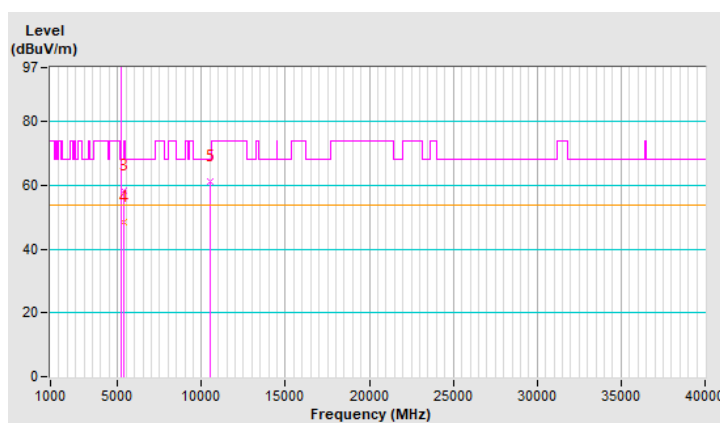


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 149 : 5745 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	116.2 PK			1.65 H	262	72.5	43.7
2	*5745.00	107.1 AV			1.65 H	262	63.4	43.7
3	11490.00	62.9 PK	74.0	-11.1	1.53 H	204	37.8	25.1
4	11490.00	51.8 AV	54.0	-2.2	1.53 H	204	26.7	25.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency (主頻).
6. " # " : The radiated frequency is out of the restricted band.
7. " - " : The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

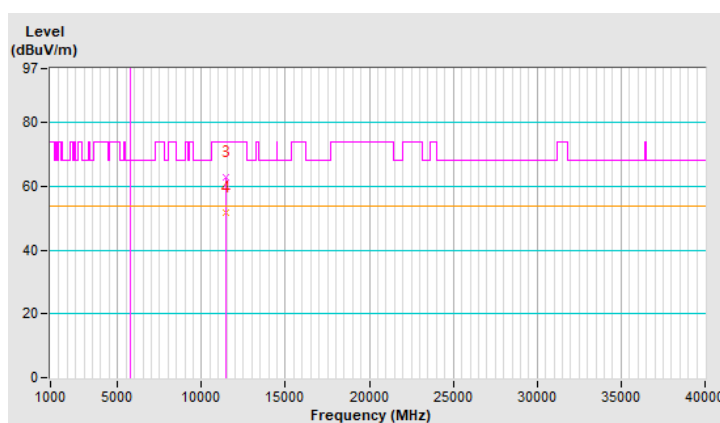


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 149 : 5745 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 16 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	123.8 PK			1.39 V	351	80.1	43.7
2	*5745.00	113.5 AV			1.39 V	351	69.8	43.7
3	11490.00	63.3 PK	74.0	-10.7	2.41 V	106	38.2	25.1
4	11490.00	51.7 AV	54.0	-2.3	2.41 V	106	26.6	25.1
5	#17235.00	-	-	-	-	-	-	-
6	22980.00	-	-	-	-	-	-	-
7	#28725.00	-	-	-	-	-	-	-
8	#34470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

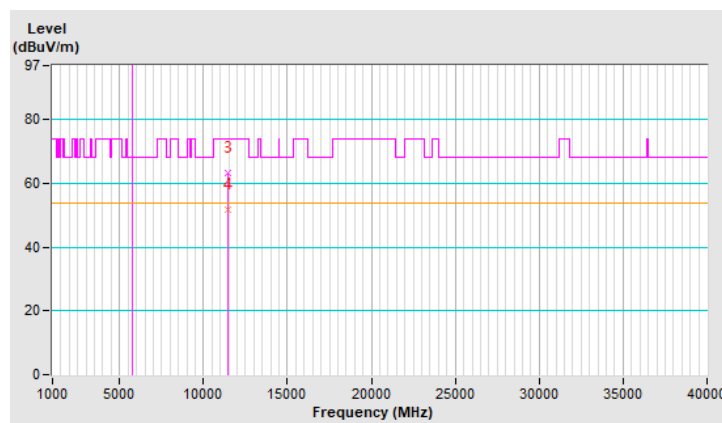


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 149 : 5745 MHz (OOBE)	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5634.80	61.8 PK	68.2	-6.4	1.65 H	262	48.1	13.7
2	#5940.00	62.6 PK	68.2	-5.6	1.65 H	262	48.1	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

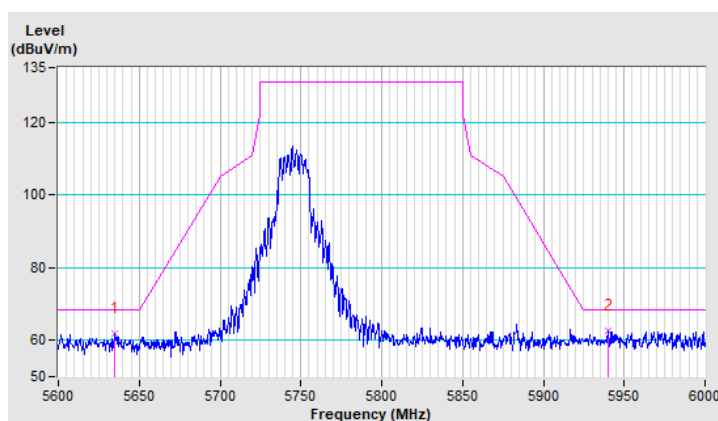


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 149 : 5745 MHz (OOBE)	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 16 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5629.20	63.0 PK	68.2	-5.2	1.39 V	351	49.3	13.7
2	#5982.40	64.0 PK	68.2	-4.2	1.39 V	351	49.5	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

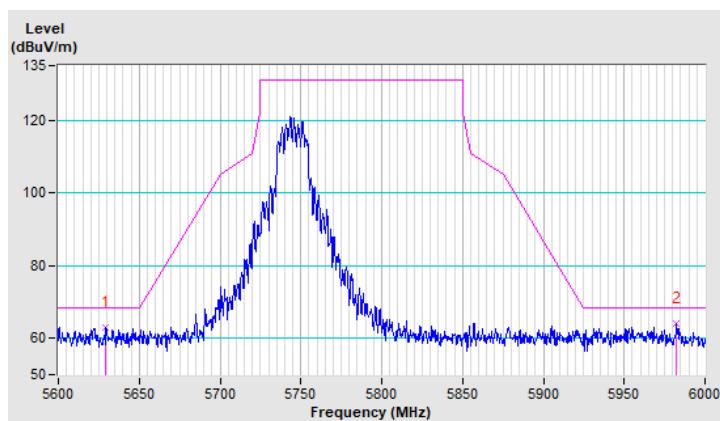


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 157 : 5785 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	117.0 PK			1.71 H	264	73.0	44.0
2	*5785.00	106.7 AV			1.71 H	264	62.7	44.0
3	11570.00	62.8 PK	74.0	-11.2	1.44 H	193	37.8	25.0
4	11570.00	51.8 AV	54.0	-2.2	1.44 H	193	26.8	25.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency (主頻).
6. " # " : The radiated frequency is out of the restricted band.
7. " - " : The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

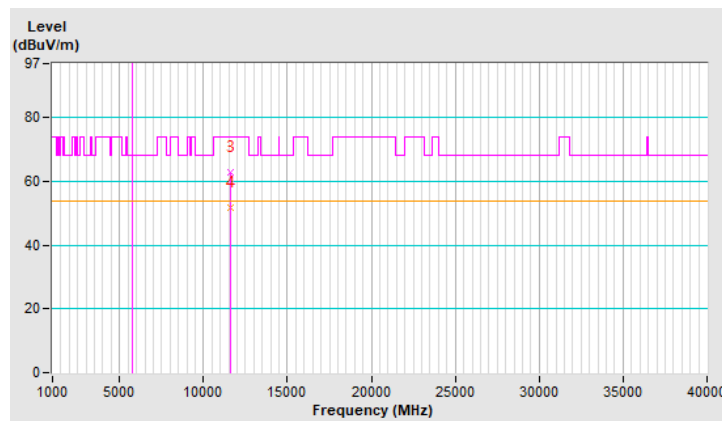


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 157 : 5785 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 16 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	123.4 PK			1.33 V	354	79.4	44.0
2	*5785.00	114.6 AV			1.33 V	354	70.6	44.0
3	11570.00	63.5 PK	74.0	-10.5	2.45 V	112	38.5	25.0
4	11570.00	51.8 AV	54.0	-2.2	2.45 V	112	26.8	25.0
5	#17355.00	-	-	-	-	-	-	-
6	#23140.00	-	-	-	-	-	-	-
7	#28925.00	-	-	-	-	-	-	-
8	#34710.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency (主頻).
6. " # " : The radiated frequency is out of the restricted band.
7. " - " : The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

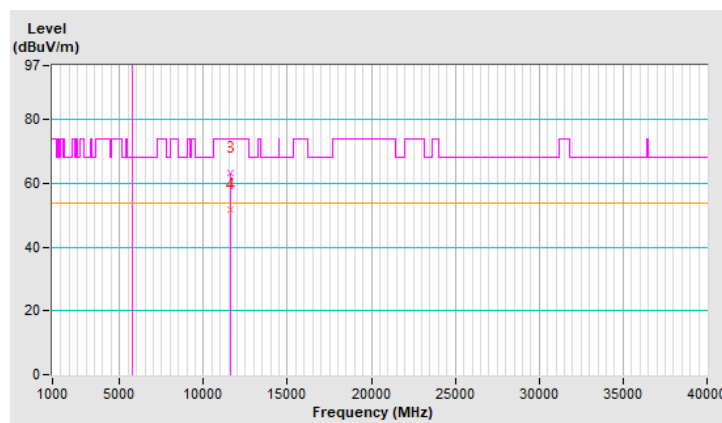


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 157 : 5785 MHz (OOBE)	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5644.00	62.9 PK	68.2	-5.3	1.71 H	264	49.2	13.7
2	#5970.80	63.5 PK	68.2	-4.7	1.71 H	264	49.0	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

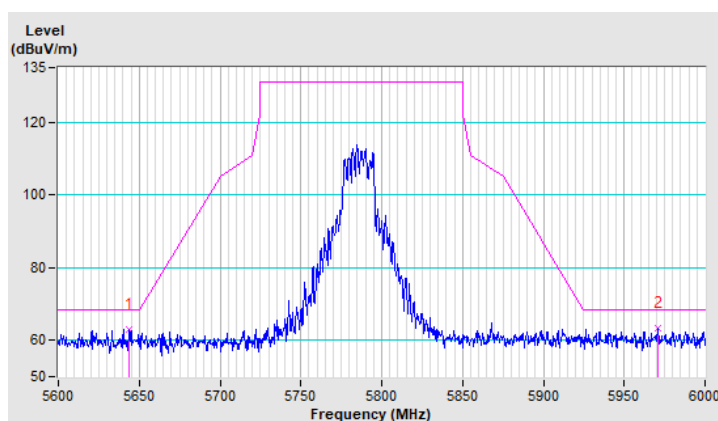


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 157 : 5785 MHz (OOBE)	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 16 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5640.80	62.2 PK	68.2	-6.0	1.33 V	354	48.5	13.7
2	#5971.60	62.9 PK	68.2	-5.3	1.33 V	354	48.4	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

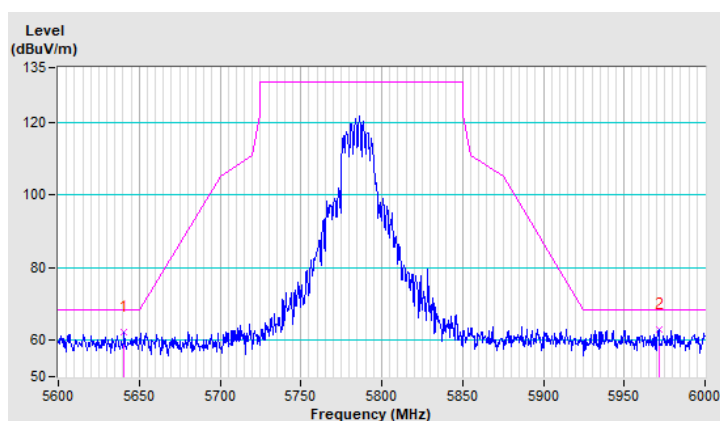


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 165 : 5825 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	116.2 PK			1.71 H	265	72.2	44.0
2	*5825.00	106.5 AV			1.71 H	265	62.5	44.0
3	11650.00	63.1 PK	74.0	-10.9	1.56 H	202	38.4	24.7
4	11650.00	51.2 AV	54.0	-2.8	1.56 H	202	26.5	24.7
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

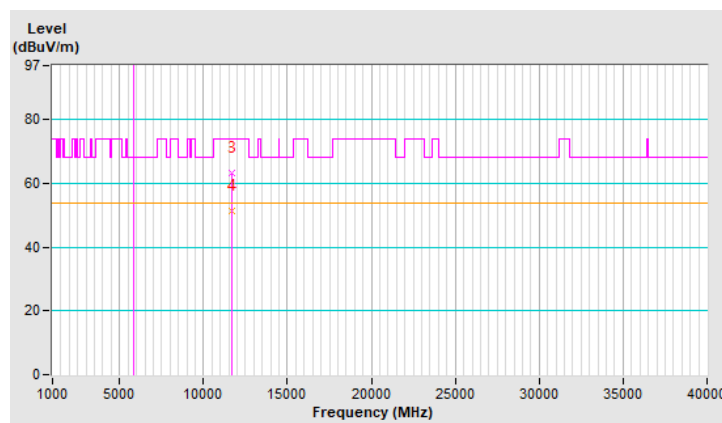


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 165 : 5825 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 16 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	123.0 PK			1.36 V	348	79.0	44.0
2	*5825.00	113.6 AV			1.36 V	348	69.6	44.0
3	11650.00	62.5 PK	74.0	-11.5	2.37 V	103	37.8	24.7
4	11650.00	51.1 AV	54.0	-2.9	2.37 V	103	26.4	24.7
5	#17475.00	-	-	-	-	-	-	-
6	#23300.00	-	-	-	-	-	-	-
7	#29125.00	-	-	-	-	-	-	-
8	#34950.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency (主頻).
6. " # " : The radiated frequency is out of the restricted band.
7. " - " : The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

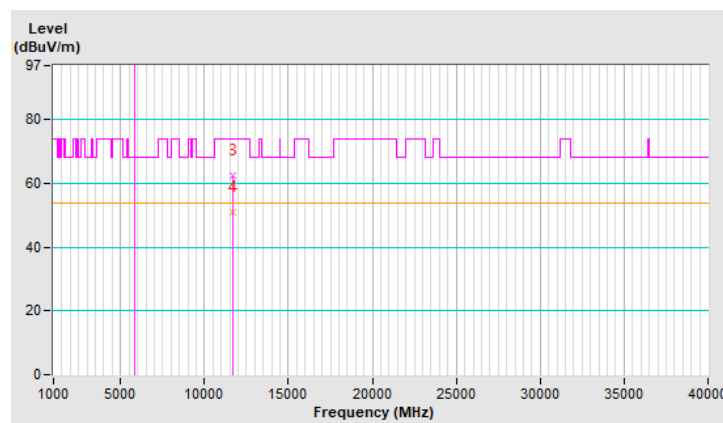


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 165 : 5825 MHz (OOBE)	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5635.20	63.1 PK	68.2	-5.1	1.71 H	265	49.4	13.7
2	#5941.20	63.5 PK	68.2	-4.7	1.71 H	265	49.0	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

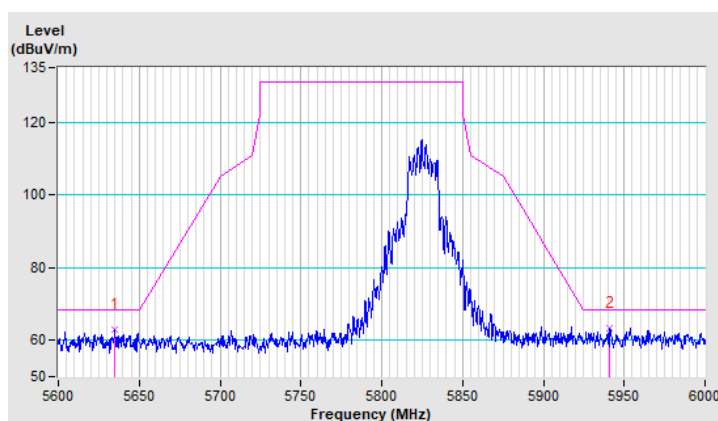


操作模式：	發射 802.11ax (HE20)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 165 : 5825 MHz (OOBE)	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 16 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5639.60	63.4 PK	68.2	-4.8	1.36 V	348	49.7	13.7
2	#5948.80	64.7 PK	68.2	-3.5	1.36 V	348	50.2	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

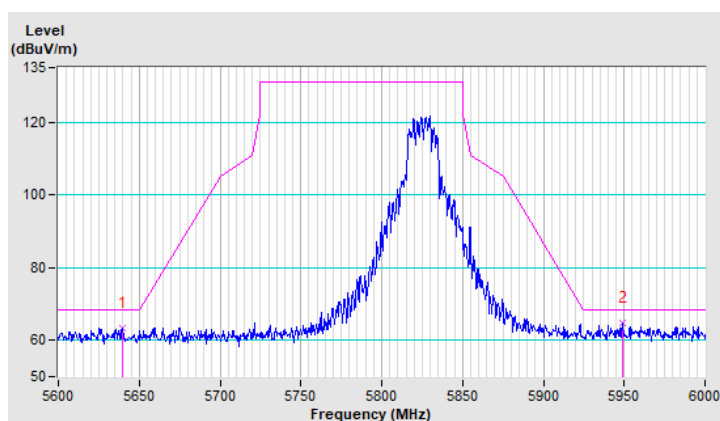


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 38 : 5190 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 16 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.3 PK	74.0	-14.7	1.45 H	70	46.3	13.0
2	5150.00	48.5 AV	54.0	-5.5	1.45 H	70	35.5	13.0
3	*5190.00	104.5 PK			1.45 H	70	62.0	42.5
4	*5190.00	94.8 AV			1.45 H	70	52.3	42.5
5	#10380.00	60.2 PK	68.2	-8.0	1.61 H	7	37.5	22.7
6	15570.00	-	-	-	-	-	-	-
7	20760.00	-	-	-	-	-	-	-
8	#25950.00	-	-	-	-	-	-	-
9	#31140.00	-	-	-	-	-	-	-
10	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

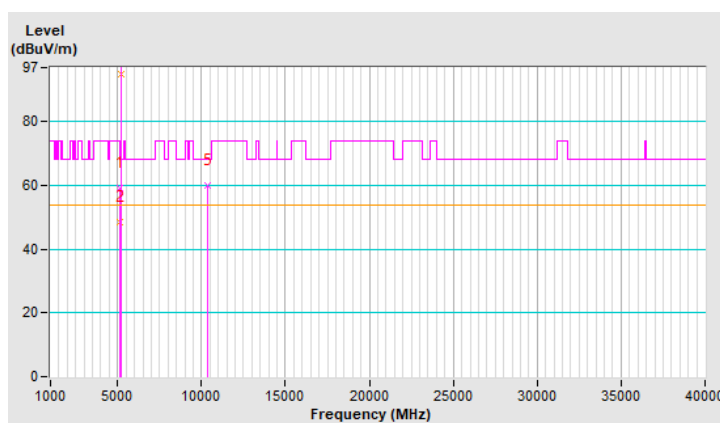


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 38 : 5190 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 15 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	72.7 PK	74.0	-1.3	1.43 V	338	59.7	13.0
2	5150.00	51.3 AV	54.0	-2.7	1.43 V	338	38.3	13.0
3	*5190.00	113.4 PK			1.43 V	338	70.9	42.5
4	*5190.00	102.5 AV			1.43 V	338	60.0	42.5
5	#10380.00	60.3 PK	68.2	-7.9	1.60 V	238	37.6	22.7
6	15570.00	-	-	-	-	-	-	-
7	20760.00	-	-	-	-	-	-	-
8	#25950.00	-	-	-	-	-	-	-
9	#31140.00	-	-	-	-	-	-	-
10	#36330.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

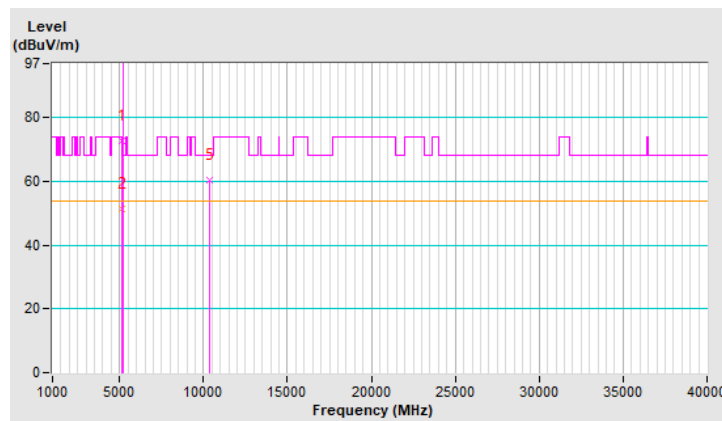


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 46：5230 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 16 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.5 PK	74.0	-10.5	1.44 H	70	50.5	13.0
2	5150.00	49.7 AV	54.0	-4.3	1.44 H	70	36.7	13.0
3	*5230.00	110.4 PK			1.44 H	70	68.0	42.4
4	*5230.00	100.8 AV			1.44 H	70	58.4	42.4
5	5350.00	59.7 PK	74.0	-14.3	1.44 H	70	46.6	13.1
6	5350.00	48.3 AV	54.0	-5.7	1.44 H	70	35.2	13.1
7	#10460.00	61.4 PK	68.2	-6.8	1.47 H	358	38.5	22.9
8	15690.00	-	-	-	-	-	-	-
9	20920.00	-	-	-	-	-	-	-
10	#26150.00	-	-	-	-	-	-	-
11	31380.00	-	-	-	-	-	-	-
12	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

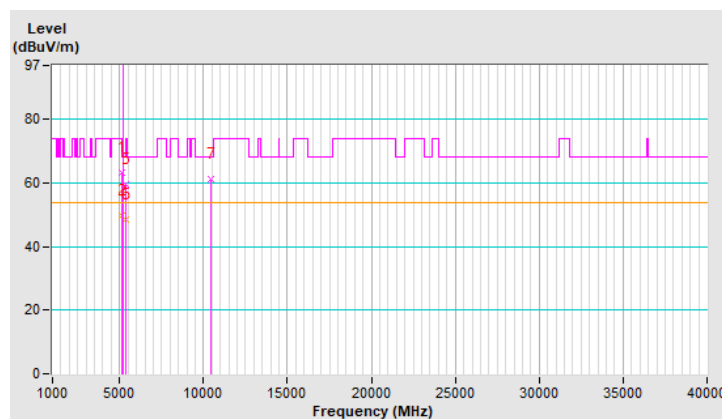


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 46：5230 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 15 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	72.7 PK	74.0	-1.3	1.41 V	337	59.7	13.0
2	5150.00	52.8 AV	54.0	-1.2	1.41 V	337	39.8	13.0
3	*5230.00	118.6 PK			1.41 V	337	76.2	42.4
4	*5230.00	107.5 AV			1.41 V	337	65.1	42.4
5	5350.00	60.6 PK	74.0	-13.4	1.41 V	337	47.5	13.1
6	5350.00	48.4 AV	54.0	-5.6	1.41 V	337	35.3	13.1
7	#10460.00	61.4 PK	68.2	-6.8	1.70 V	245	38.5	22.9
8	15690.00	-	-	-	-	-	-	-
9	20920.00	-	-	-	-	-	-	-
10	#26150.00	-	-	-	-	-	-	-
11	31380.00	-	-	-	-	-	-	-
12	#36610.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

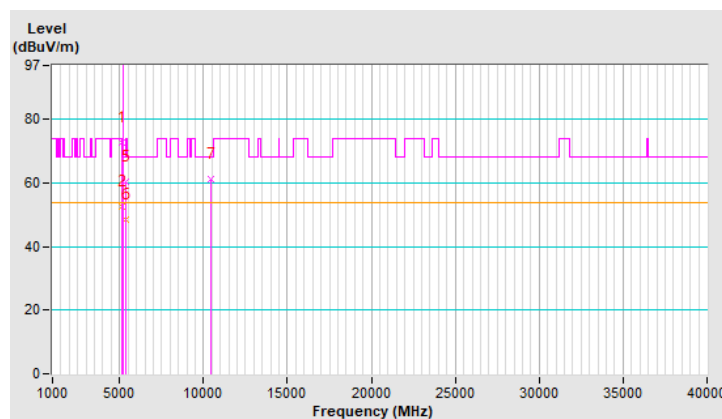


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 151 : 5755 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5755.00	113.5 PK			1.58 H	267	69.7	43.8
2	*5755.00	103.8 AV			1.58 H	267	60.0	43.8
3	11510.00	62.6 PK	74.0	-11.4	1.43 H	199	37.6	25.0
4	11510.00	51.4 AV	54.0	-2.6	1.43 H	199	26.4	25.0
5	#17265.00	-	-	-	-	-	-	-
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency (主頻).
6. " # " : The radiated frequency is out of the restricted band.
7. " - " : The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

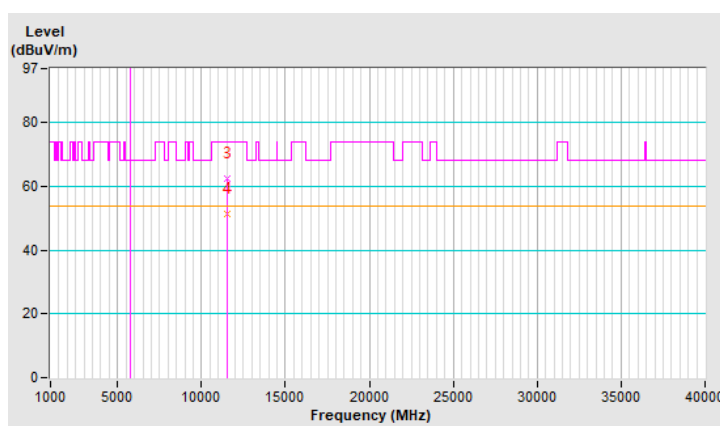


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 151 : 5755 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 16 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5755.00	120.2 PK			1.53 V	351	76.4	43.8
2	*5755.00	111.7 AV			1.53 V	351	67.9	43.8
3	11510.00	62.9 PK	74.0	-11.1	2.28 V	78	37.9	25.0
4	11510.00	51.7 AV	54.0	-2.3	2.28 V	78	26.7	25.0
5	#17265.00	-	-	-	-	-	-	-
6	23020.00	-	-	-	-	-	-	-
7	#28775.00	-	-	-	-	-	-	-
8	#34530.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

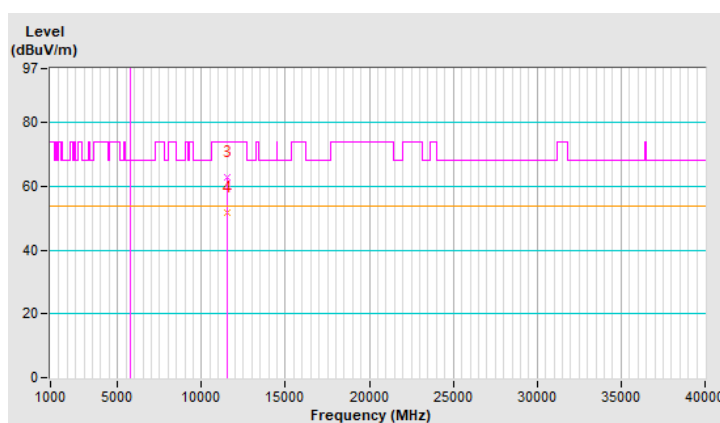


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 151 : 5755 MHz (OOBE)	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5646.00	62.5 PK	68.2	-5.7	1.58 H	267	48.9	13.6
2	#5946.40	63.1 PK	68.2	-5.1	1.58 H	267	48.6	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

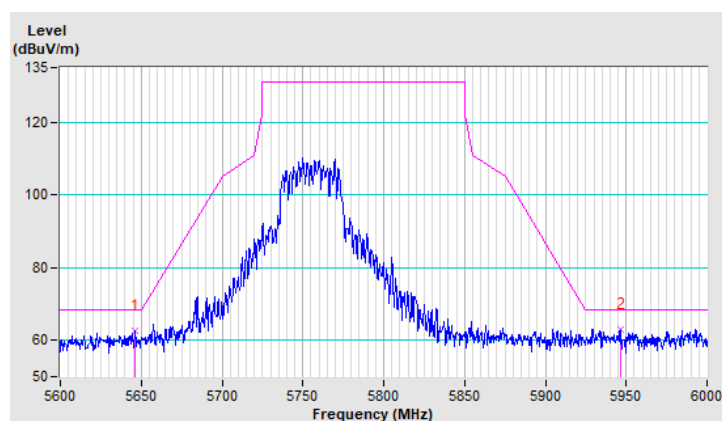


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 151 : 5755 MHz (OOBE)	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 16 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5649.20	66.0 PK	68.2	-2.2	1.53 V	351	52.4	13.6
2	#5982.00	63.3 PK	68.2	-4.9	1.53 V	351	48.8	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

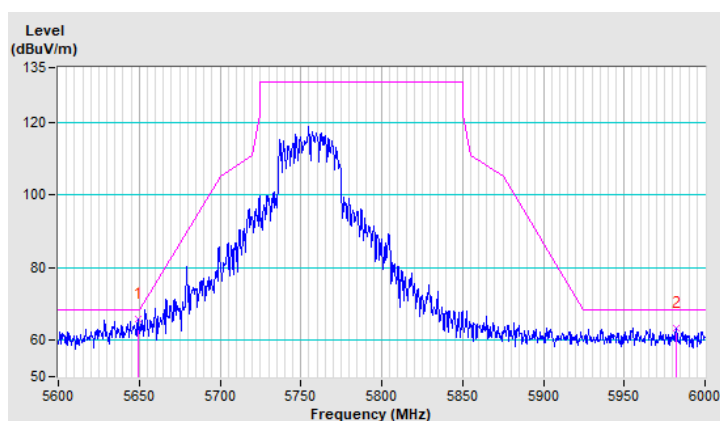


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 159 : 5795 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5795.00	115.1 PK			1.53 H	261	71.1	44.0
2	*5795.00	104.0 AV			1.53 H	261	60.0	44.0
3	11590.00	62.6 PK	74.0	-11.4	1.52 H	187	37.7	24.9
4	11590.00	51.5 AV	54.0	-2.5	1.52 H	187	26.6	24.9
5	#17385.00	-	-	-	-	-	-	-
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency (主頻).
6. " # " : The radiated frequency is out of the restricted band.
7. " - " : The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

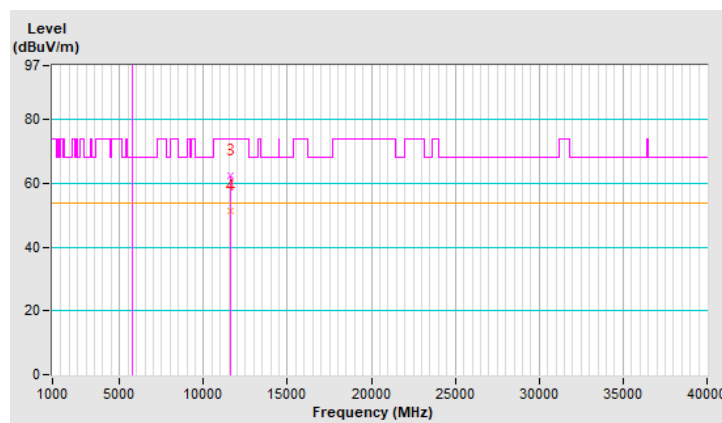


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 159 : 5795 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 16 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5795.00	121.1 PK			1.29 V	349	77.1	44.0
2	*5795.00	111.2 AV			1.29 V	349	67.2	44.0
3	11590.00	63.0 PK	74.0	-11.0	2.43 V	127	38.1	24.9
4	11590.00	51.7 AV	54.0	-2.3	2.43 V	127	26.8	24.9
5	#17385.00	-	-	-	-	-	-	-
6	#23180.00	-	-	-	-	-	-	-
7	#28975.00	-	-	-	-	-	-	-
8	#34770.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency (主頻).
6. " # " : The radiated frequency is out of the restricted band.
7. " - " : The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

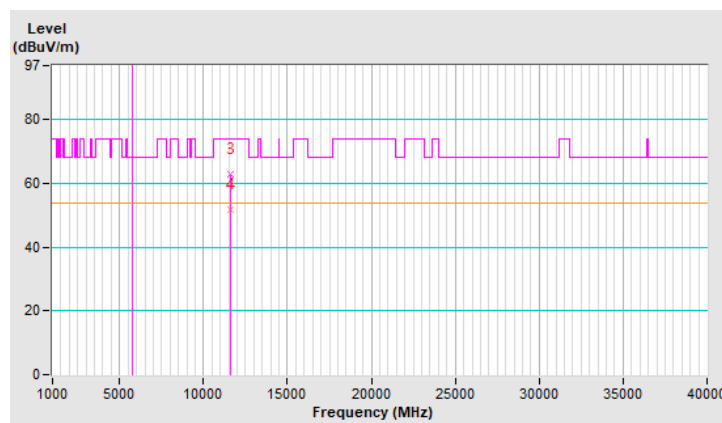


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 159 : 5795 MHz (OOBE)	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5640.80	63.0 PK	68.2	-5.2	1.53 H	261	49.3	13.7
2	#5991.60	63.9 PK	68.2	-4.3	1.53 H	261	49.4	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

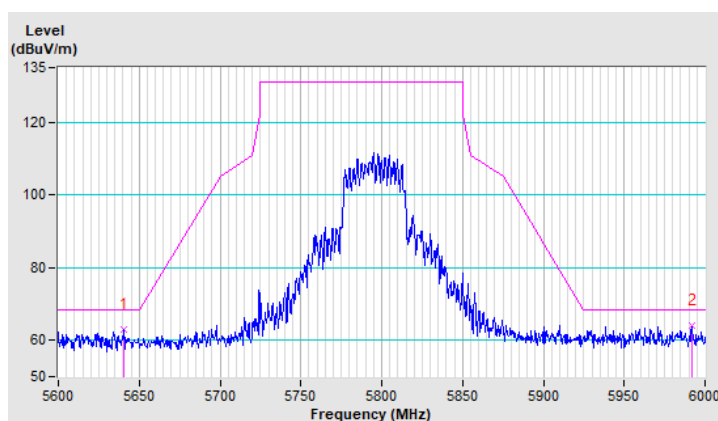


操作模式：	發射 802.11ax (HE40)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 159 : 5795 MHz (OOBE)	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 16 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5634.40	63.3 PK	68.2	-4.9	1.29 V	349	49.6	13.7
2	#5970.40	63.0 PK	68.2	-5.2	1.29 V	349	48.5	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

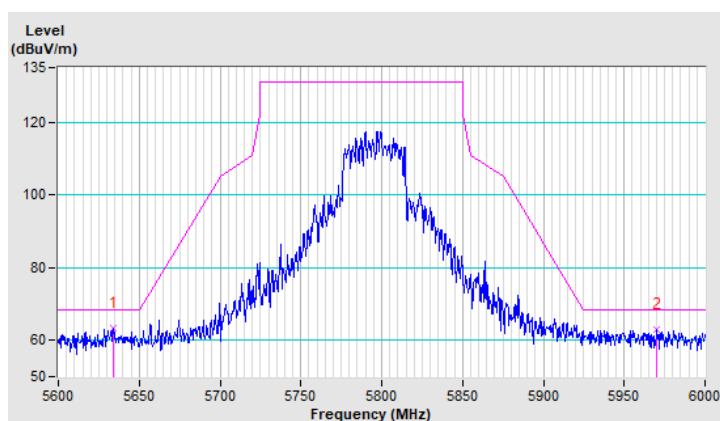


操作模式：	發射 802.11ax (HE80)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 42 : 5210 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 16 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.6 PK	74.0	-14.4	1.47 H	72	46.6	13.0
2	5150.00	49.9 AV	54.0	-4.1	1.47 H	72	36.9	13.0
3	*5210.00	100.8 PK			1.47 H	72	58.4	42.4
4	*5210.00	91.9 AV			1.47 H	72	49.5	42.4
5	#10420.00	60.5 PK	68.2	-7.7	1.63 H	353	37.6	22.9
6	15630.00	-	-	-	-	-	-	-
7	20840.00	-	-	-	-	-	-	-
8	#26050.00	-	-	-	-	-	-	-
9	31260.00	-	-	-	-	-	-	-
10	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

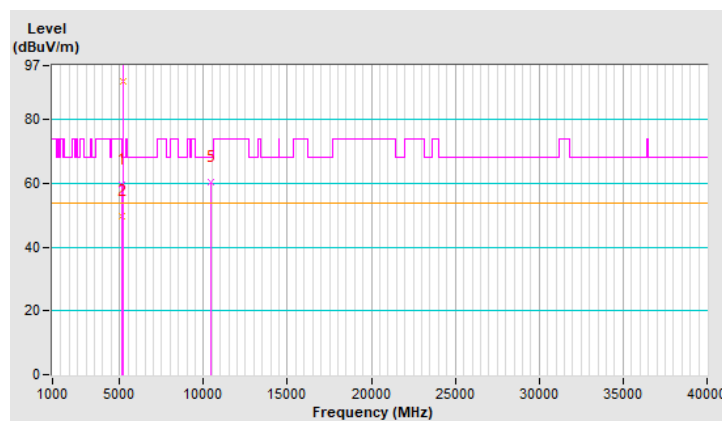


操作模式：	發射 802.11ax (HE80)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 42 : 5210 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 29 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.6 PK	74.0	-8.4	1.43 V	338	52.6	13.0
2	5150.00	53.6 AV	54.0	-0.4	1.43 V	338	40.6	13.0
3	*5210.00	109.0 PK			1.43 V	338	66.6	42.4
4	*5210.00	98.5 AV			1.43 V	338	56.1	42.4
5	#10420.00	61.1 PK	68.2	-7.1	1.95 V	231	38.2	22.9
6	15630.00	-	-	-	-	-	-	-
7	20840.00	-	-	-	-	-	-	-
8	#26050.00	-	-	-	-	-	-	-
9	31260.00	-	-	-	-	-	-	-
10	36470.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

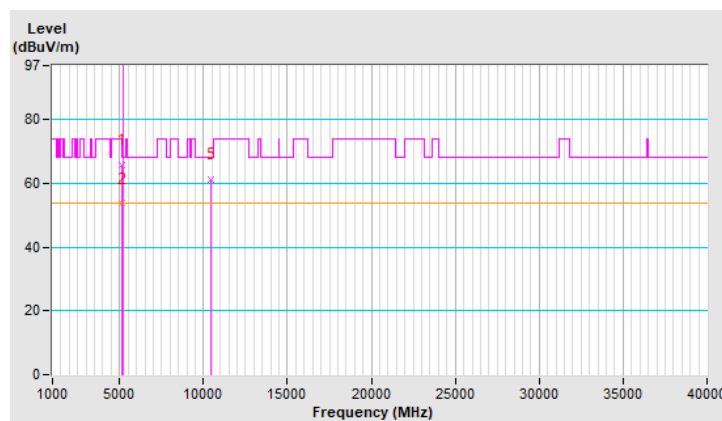


操作模式：	發射 802.11ax (HE80)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 155 : 5775 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5775.00	109.6 PK			1.72 H	265	65.8	43.8
2	*5775.00	98.5 AV			1.72 H	265	54.7	43.8
3	11550.00	62.9 PK	74.0	-11.1	1.46 H	203	37.9	25.0
4	11550.00	51.8 AV	54.0	-2.2	1.46 H	203	26.8	25.0
5	#17325.00	-	-	-	-	-	-	-
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency (主頻).
6. " # " : The radiated frequency is out of the restricted band.
7. " - " : The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

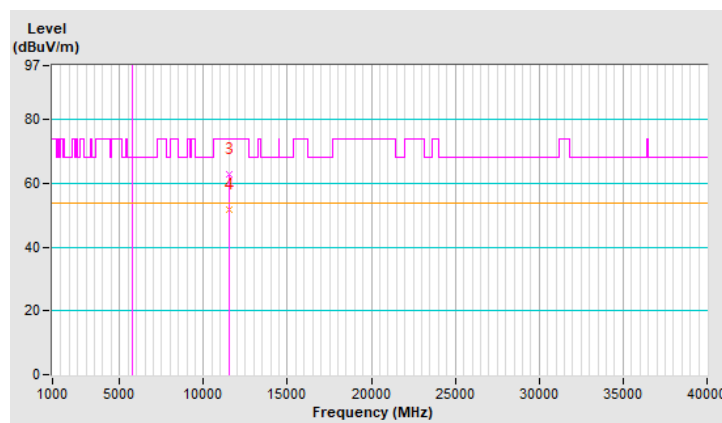


操作模式：	發射 802.11ax (HE80)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 155 : 5775 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=10kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 16 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5775.00	116.6 PK			1.27 V	332	72.8	43.8
2	*5775.00	106.7 AV			1.27 V	332	62.9	43.8
3	11550.00	62.3 PK	74.0	-11.7	2.43 V	114	37.3	25.0
4	11550.00	51.2 AV	54.0	-2.8	2.43 V	114	26.2	25.0
5	#17325.00	-	-	-	-	-	-	-
6	23100.00	-	-	-	-	-	-	-
7	#28875.00	-	-	-	-	-	-	-
8	#34650.00	-	-	-	-	-	-	-

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency (主頻).
6. " # ": The radiated frequency is out of the restricted band.
7. " - ": The emission levels were too low to be detected.
8. The blank is not available, the limit of fundamental frequency was restricted at the output power.

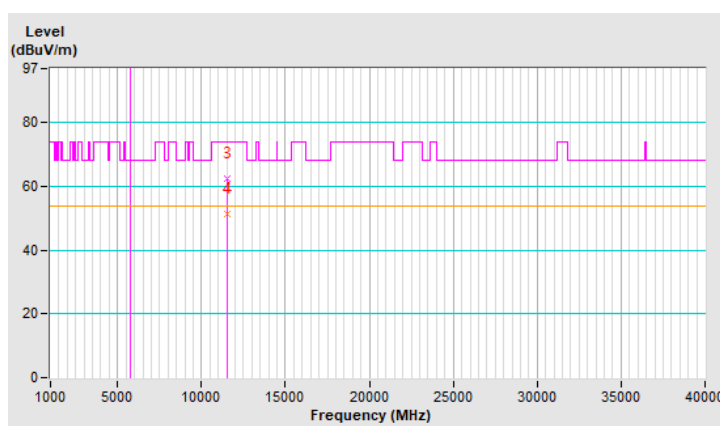


操作模式：	發射 802.11ax (HE80)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 155 : 5775 MHz (OOBE)	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 17 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5617.60	63.5 PK	68.2	-4.7	1.72 H	265	49.9	13.6
2	#5988.40	65.2 PK	68.2	-3.0	1.72 H	265	50.7	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

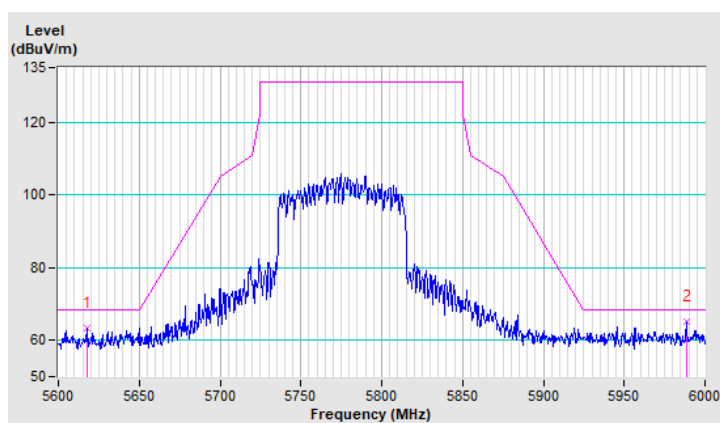


操作模式：	發射 802.11ax (HE80)	調變技術：	OFDMA-MIMO
基本波頻率：	CH 155 : 5775 MHz (OOBE)	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 16 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	66.6 PK	68.2	-1.6	1.27 V	332	53.0	13.6
2	#5940.80	63.9 PK	68.2	-4.3	1.27 V	332	49.4	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

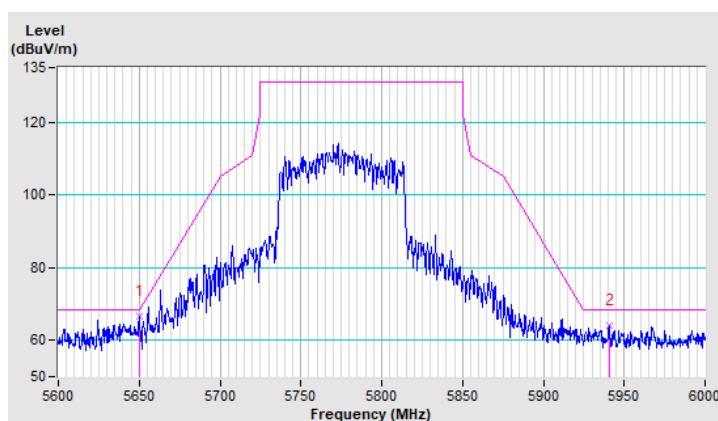


9.6.2 接收諧波

操作模式：	接收		
基本波頻率：	CH 149 : 5745 MHz	檢測器與頻寬：	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3MHz (RMS)
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 20 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7785.00	56.4 PK	74.0	-17.6	2.33 H	254	38.3	18.1
2	7785.00	45.3 AV	54.0	-8.7	2.33 H	254	27.2	18.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.

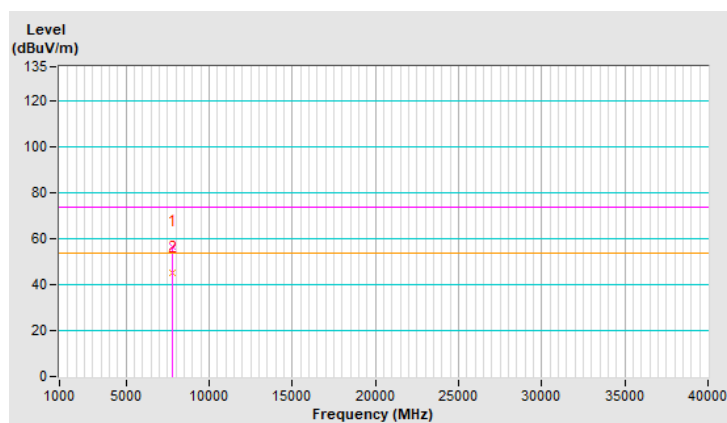


操 作 模 式 :	接收		
基 本 波 頻 率 :	CH 149 : 5745 MHz	檢 測 器 與 頻 寬 :	(PK) RB=1MHz, VB=3MHz (AV) RB=1MHz, VB=3MHz (RMS)
量 測 場 地 溫 度 :	25 °C	量 測 場 地 濕 度 :	70% RH
測 試 日 期 :	110 年 07 月 20 日	測 試 者 :	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7785.00	55.7 PK	74.0	-18.3	1.84 V	323	37.6	18.1
2	7785.00	47.9 AV	54.0	-6.1	1.84 V	323	29.8	18.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit.

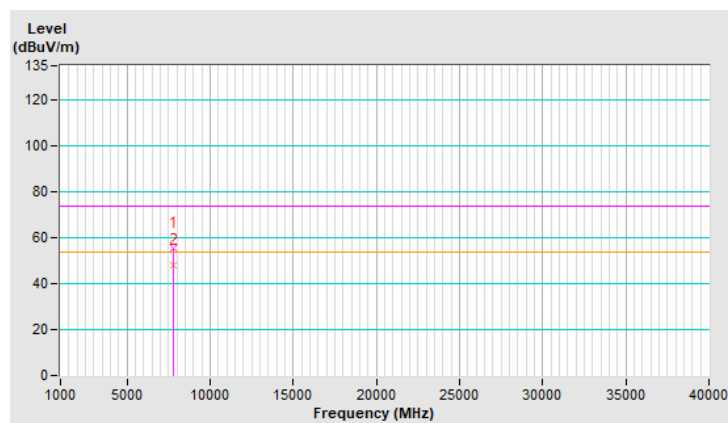


9.6.3 其它不必要之訊號

操作模式：	發射/接收 802.11a	調變技術：	OFDM-MIMO
基本波頻率：	CH 149：5745 MHz	檢測器與頻寬：	(QP) RB=120kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 20 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	49.30	30.3 QP	40.0	-9.7	2.00 H	54	38.9	-8.6
2	101.69	28.0 QP	43.5	-15.5	1.50 H	346	41.1	-13.1
3	221.03	23.8 QP	46.0	-22.2	1.00 H	13	35.2	-11.4
4	243.34	21.0 QP	46.0	-25.0	1.50 H	28	30.7	-9.7
5	885.62	33.9 QP	46.0	-12.1	2.00 H	169	28.6	5.3
6	935.10	39.0 QP	46.0	-7.0	1.00 H	289	32.2	6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

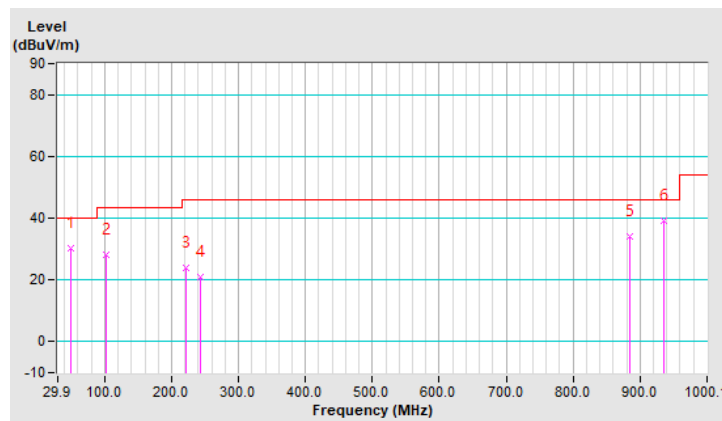


操作模式：	發射/接收 802.11a	調變技術：	OFDM-MIMO
基本波頻率：	CH 149：5745 MHz	檢測器與頻寬：	(QP) RB=120kHz
量測場地溫度：	25 °C	量測場地濕度：	70% RH
測試日期：	110 年 07 月 20 日	測試者：	吳承翰

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	77.44	30.2 QP	40.0	-9.8	1.50 V	358	42.7	-12.5
2	104.61	30.1 QP	43.5	-13.4	1.00 V	322	42.7	-12.6
3	188.04	35.3 QP	43.5	-8.2	1.50 V	7	46.3	-11.0
4	306.41	32.8 QP	46.0	-13.2	1.00 V	230	40.0	-7.2
5	783.75	33.4 QP	46.0	-12.6	2.00 V	178	29.6	3.8
6	938.01	37.7 QP	46.0	-8.3	1.50 V	283	31.0	6.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. Margin value = Emission Level – Limit value.
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

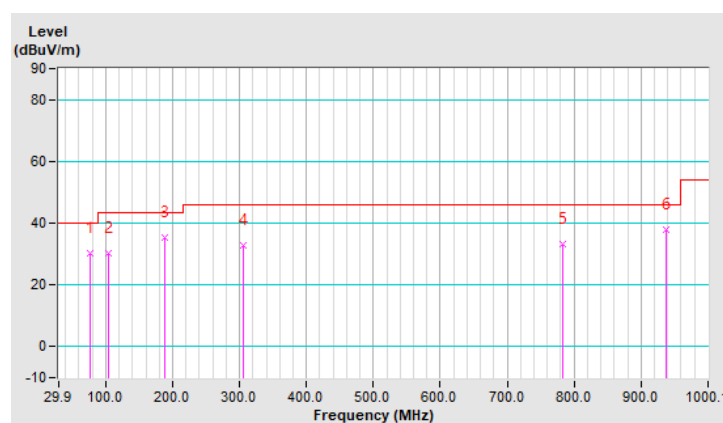

9.7 量測結果判定

依據測試數據結果，符合低功率射頻器材技術規範之要求。

9.8 配置照片

請參閱附件測試設置照片(BV CPS 報告編號：BCWK-WTW-P21050819_TSup)。

10 電源線傳導干擾之量測

10.1 適用標準

請見本報告3.1節第1項的規定。

10.2 量測方法

將待測物置於0.8米高的非金屬桌面，使其操作在工作狀態，待測物電源線接至電源線阻抗穩定網路上，從測試接收機記錄頻率由0.15MHz至30MHz之間之電源線傳導放射強度。

10.3 量測儀器

同 5.3 節。

10.4 測試配置

同 5.4 節。

10.5 干擾值之計算

同 5.5 節。


10.6 量測結果

操作模式	發射/接收 802.11a	調變技術	OFDM-MIMO
基本波頻率	CH 149 : 5745 MHz	測試日期	110 年 07 月 20 日
量測場地溫度	25°C	量測場地濕度	75%RH
測試者	吳承翰		

		6 dB Bandwidth: 9kHz				PHASE: LINE (L)			
輻射頻率	校正因子	儀器讀值		結果值		限制值		餘裕度	
[MHz]	[dB]	[dB (uV)]		[dB (uV)]		[dB (uV)]		[dB]	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.24200	9.78	37.62	11.66	47.40	21.44	62.03	52.03	-14.63	-30.59
0.39000	9.83	35.47	33.27	45.30	43.10	58.06	48.06	-12.76	-4.96
0.42577	9.83	30.00	28.40	39.83	38.23	57.33	47.33	-17.50	-9.10
0.73800	9.88	34.24	14.74	44.12	24.62	56.00	46.00	-11.88	-21.38
3.27800	9.97	33.24	15.76	43.21	25.73	56.00	46.00	-12.79	-20.27
8.15400	10.04	33.42	21.28	43.46	31.32	60.00	50.00	-16.54	-18.68

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

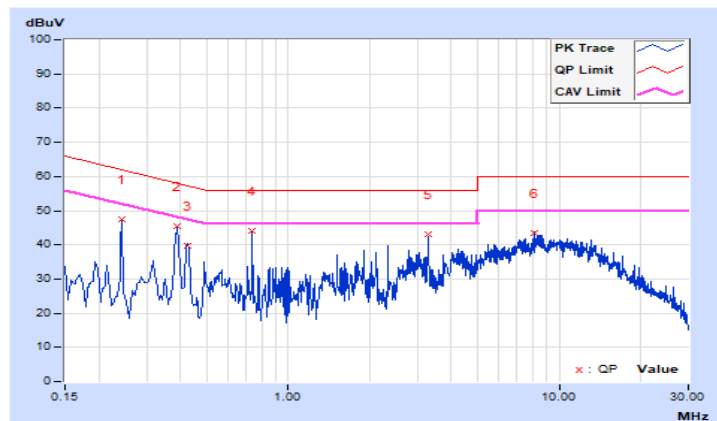


操作模式	發射/接收 802.11n (HT20)	調變技術	OFDM-MIMO
基本波頻率	CH 149 : 5745 MHz	測試日期	110 年 07 月 20 日
量測場地溫度	25°C	量測場地濕度	75%RH
測試者	吳承翰		

輻射頻率 [MHz]	校正因子 [dB]	6 dB Bandwidth: 9kHz				PHASE: NEUTRAL (N)			
		儀器讀值		結果值		限制值		餘裕度	
		[dB (uV)]		[dB (uV)]		[dB (uV)]		[dB]	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.15800	9.81	23.53	14.50	33.34	24.31	65.57	55.57	-32.23	-31.26
0.38725	9.90	24.85	22.80	34.75	32.70	58.12	48.12	-23.37	-15.42
0.49400	9.91	27.83	7.54	37.74	17.45	56.10	46.10	-18.36	-28.65
1.62200	9.98	26.51	10.85	36.49	20.83	56.00	46.00	-19.51	-25.17
7.29800	10.09	28.07	18.55	38.16	28.64	60.00	50.00	-21.84	-21.36
9.57000	10.13	29.81	20.14	39.94	30.27	60.00	50.00	-20.06	-19.73

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

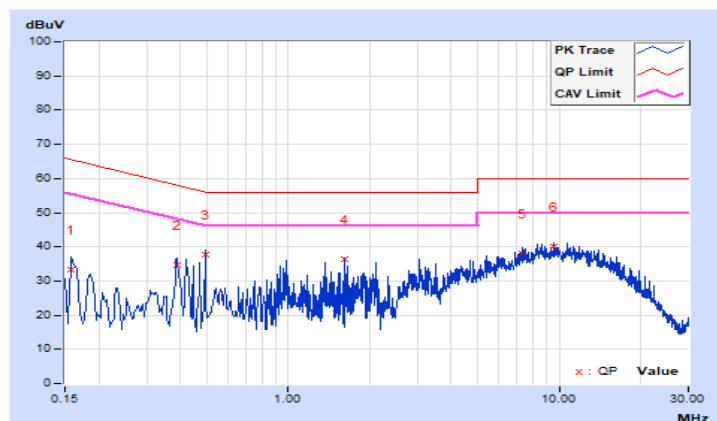

10.7 量測結果判定

依據測試數據結果，符合低功率射頻器材技術規範之要求。

10.8 配置照片

請參閱附件測試設置照片(BV CPS 報告編號：BCWK-WTW-P21050819_TSup)。

11 峰值傳導輸出功率量測及發射頻寬之要求

11.1 適用標準

待測物操作頻帶	適用標準
☒ 5.15 GHz~5.25 GHz	☐ 請見本報告 3.1 節第 6 項(II)(A)及 4 項(II)(A)的規定(供戶外操作使用)
	☒ 請見本報告 3.1 節第 6 項(II)(A)及 4 項(II)(B)的規定(供室內操作使用)
	☐ 請見本報告 3.1 節第 6 項(II)(A)及 4 項(II)(C)的規定(供固定式點對點操作使用)
	☐ 請見本報告 3.1 節第 6 項(II)(B)及 4 項(II)(D)的規定(供用戶端裝置使用)
☐ 5.25 GHz~5.35 GHz	請見本報告 3.1 節第 6 項(III)及 4 項(III)的規定
☐ 5.470 GHz~5.725 GHz	請見本報告 3.1 節第 6 項(III)及 4 項(III)的規定
☒ 5.725 GHz~5.850 GHz	請見本報告 3.1 節第 6 項(IV)及 4 項(IV)的規定

11.2 量測方法

- 將待測物輸出經由衰減器接到功率計上。
- 設定待測物處於連續發射狀態。
- 計算其輸出功率峰值。

11.3 量測儀器

同 7.3 節。

11.4 測試配置

同 7.4 節。

11.5 量測結果

操作模式	發射	測試日期	110 年 08 月 05 日
量測場地溫度	25°C	量測場地濕度	60%RH
測試者	吳宗霖、王紀維		

CDD Mode

802.11a

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	22.56	21.72	328.895	25.17	30.00	Pass
40	5200	25.15	24.79	628.641	27.98	30.00	Pass
48	5240	24.81	24.77	602.608	27.80	30.00	Pass
149	5745	26.40	25.69	807.197	29.07	30.00	Pass
157	5785	25.94	25.62	757.399	28.79	30.00	Pass
165	5825	25.81	25.97	776.432	28.90	30.00	Pass

802.11n (HT20)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	20.65	20.26	222.314	23.47	30.00	Pass
40	5200	24.64	24.35	563.342	27.51	30.00	Pass
48	5240	24.78	24.16	561.223	27.49	30.00	Pass
149	5745	25.61	25.42	712.252	28.53	30.00	Pass
157	5785	25.54	25.41	705.633	28.49	30.00	Pass
165	5825	25.33	25.36	684.751	28.36	30.00	Pass

802.11n (HT40)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	18.27	17.42	122.351	20.88	30.00	Pass
46	5230	23.64	23.34	446.981	26.50	30.00	Pass
151	5755	25.78	25.35	721.210	28.58	30.00	Pass
159	5795	25.51	25.18	685.241	28.36	30.00	Pass

802.11ac (VHT20)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	20.83	20.44	231.722	23.65	30.00	Pass
40	5200	24.81	24.55	587.793	27.69	30.00	Pass
48	5240	24.96	24.33	584.348	27.67	30.00	Pass
149	5745	25.78	25.61	742.358	28.71	30.00	Pass
157	5785	25.73	25.60	737.189	28.68	30.00	Pass
165	5825	25.50	25.53	712.086	28.53	30.00	Pass

802.11ac (VHT40)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	18.46	17.64	128.222	21.08	30.00	Pass
46	5230	23.85	23.56	469.647	26.72	30.00	Pass
151	5755	25.98	25.55	755.200	28.78	30.00	Pass
159	5795	25.72	25.40	719.987	28.57	30.00	Pass

802.11ac (VHT80)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	16.72	18.05	110.816	20.45	30.00	Pass
155	5775	22.85	22.62	375.563	25.75	30.00	Pass

802.11ax (HE20)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	21.07	20.67	244.619	23.88	30.00	Pass
40	5200	25.05	24.77	619.806	27.92	30.00	Pass
48	5240	25.19	24.56	616.129	27.90	30.00	Pass
149	5745	26.02	25.83	782.769	28.94	30.00	Pass
157	5785	25.95	25.83	776.375	28.90	30.00	Pass
165	5825	25.73	25.77	751.683	28.76	30.00	Pass

802.11ax (HE40)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	18.66	17.82	133.985	21.27	30.00	Pass
46	5230	24.04	23.75	490.650	26.91	30.00	Pass
151	5755	26.17	25.75	789.837	28.98	30.00	Pass
159	5795	25.90	25.59	751.288	28.76	30.00	Pass

802.11ax (HE80)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	16.84	18.06	112.279	20.50	30.00	Pass
155	5775	22.98	22.68	383.963	25.84	30.00	Pass

Beamforming Mode

802.11n (HT20)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	20.65	20.26	222.314	23.47	30.00	Pass
40	5200	24.64	24.35	563.342	27.51	30.00	Pass
48	5240	24.78	24.16	561.223	27.49	30.00	Pass
149	5745	25.61	25.42	712.252	28.53	30.00	Pass
157	5785	25.54	25.41	705.633	28.49	30.00	Pass
165	5825	25.33	25.36	684.751	28.36	30.00	Pass

Note:

1. 5180-5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.36\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.
2. 5745-5825MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.36\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.

802.11n (HT40)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	18.27	17.42	122.351	20.88	30.00	Pass
46	5230	23.64	23.34	446.981	26.50	30.00	Pass
151	5755	25.78	25.35	721.210	28.58	30.00	Pass
159	5795	25.51	25.18	685.241	28.36	30.00	Pass

Note:

1. 5180-5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.36\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.
2. 5745-5825MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.36\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.

802.11ac (VHT20)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	20.83	20.44	231.722	23.65	30.00	Pass
40	5200	24.81	24.55	587.793	27.69	30.00	Pass
48	5240	24.96	24.33	584.348	27.67	30.00	Pass
149	5745	25.78	25.61	742.358	28.71	30.00	Pass
157	5785	25.73	25.60	737.189	28.68	30.00	Pass
165	5825	25.50	25.53	712.086	28.53	30.00	Pass

Note:

1. 5180-5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.36\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.
2. 5745-5825MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.36\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.

802.11ac (VHT40)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	18.46	17.64	128.222	21.08	30.00	Pass
46	5230	23.85	23.56	469.647	26.72	30.00	Pass
151	5755	25.98	25.55	755.200	28.78	30.00	Pass
159	5795	25.72	25.40	719.987	28.57	30.00	Pass

Note:

1. 5180-5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.36\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.
2. 5745-5825MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.36\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.

802.11ac (VHT80)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	16.72	18.05	110.816	20.45	30.00	Pass
155	5775	22.85	22.62	375.563	25.75	30.00	Pass

Note:

1. 5180-5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.36\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.
2. 5745-5825MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.36\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.

802.11ax (HE20)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	21.07	20.67	244.619	23.88	30.00	Pass
40	5200	25.05	24.77	619.806	27.92	30.00	Pass
48	5240	25.19	24.56	616.129	27.90	30.00	Pass
149	5745	26.02	25.83	782.769	28.94	30.00	Pass
157	5785	25.95	25.83	776.375	28.90	30.00	Pass
165	5825	25.73	25.77	751.683	28.76	30.00	Pass

Note:

- 5180-5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.36\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.
- 5745-5825MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.36\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.

802.11ax (HE40)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	18.66	17.82	133.985	21.27	30.00	Pass
46	5230	24.04	23.75	490.650	26.91	30.00	Pass
151	5755	26.17	25.75	789.837	28.98	30.00	Pass
159	5795	25.90	25.59	751.288	28.76	30.00	Pass

Note:

- 5180-5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.36\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.
- 5745-5825MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.36\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.

802.11ax (HE80)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	16.84	18.06	112.279	20.50	30.00	Pass
155	5775	22.98	22.68	383.963	25.84	30.00	Pass

Note:

- 5180-5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.36\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.
- 5745-5825MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.36\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.

11.6 量測結果判定

依據測試數據結果，符合低功率射頻器材技術規範之要求。

12 功率頻譜密度之量測

12.1 適用標準

待測物操作頻帶	適用標準
☒ 5.15 GHz~5.25 GHz	☐ 請見本報告 3.1 節第 7 項(II) (A)及 4 項(II)(A)的規定(供戶外操作使用)
	☒ 請見本報告 3.1 節第 7 項(II)(A)及 4 項(II)(B)的規定(供室內操作使用)
	☐ 請見本報告 3.1 節第 7 項(II)(A)及 4 項(II)(C)的規定(供固定式點對點操作使用)
	☐ 請見本報告 3.1 節第 7 項(II)(B)及 4 項(II)(D)的規定(供用戶端裝置使用)
☐ 5.25 GHz~5.35 GHz	請見本報告 3.1 節第 7 項(III)及 4 項(III)的規定
☐ 5.470 GHz~5.725 GHz	請見本報告 3.1 節第 7 項(III)及 4 項(III)的規定
☒ 5.725 GHz~5.850 GHz	請見本報告 3.1 節第 7 項(IV)及 4 項(IV)的規定

12.2 量測方法

For 5180 ~ 5240MHz:

Using method SA-2

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1MHz, Set VBW $\geq$ 3 MHz, Detector = RMS
- Set Channel power measure = 1MHz
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value and add 10 log (1/duty cycle)

For 5745 ~ 5825MHz:

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500 kHz, Set VBW $\geq$ 1.5 MHz, Detector = RMS
- Use the peak marker function to determine the maximum power level in any 500 kHz band segment within the fundamental EBW.
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value and add 10 log (1/duty cycle)

12.3 量測儀器

同 8.3 節。

12.4 測試配置

同 8.4 節。

12.5 量測結果

操作模式	發射	測試日期	110 年 08 月 05 日
量測場地溫度	25°C	量測場地濕度	60%RH
測試者	吳宗霖、王紀維		

For 5180 ~ 5240MHz

802.11a

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
36	5180	9.93	10.04	0.21	13.20	17.00	Pass
40	5200	9.90	9.97	0.21	13.15	17.00	Pass
48	5240	7.59	7.95	0.21	10.99	17.00	Pass

Note:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.36\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.
- Refer to section 2.1 for duty cycle spectrum plot.

802.11ax (HE20)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
36	5180	7.72	7.98	0.51	11.37	17.00	Pass
40	5200	9.17	9.05	0.51	12.63	17.00	Pass
48	5240	8.94	8.97	0.51	12.48	17.00	Pass

Note:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.36\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.
- Refer to section 2.1 for duty cycle spectrum plot.

802.11ax (HE40)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
38	5190	2.01	1.88	0.88	5.84	17.00	Pass
46	5230	5.92	5.85	0.88	9.78	17.00	Pass

Note:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.36\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.
3. Refer to section 2.1 for duty cycle spectrum plot.


802.11ax (HE80)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
42	5210	-1.09	0.25	0.81	3.46	17.00	Pass

Note:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.36\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.
3. Refer to section 2.1 for duty cycle spectrum plot.

**此測試圖僅放測試結果最差的頻道。

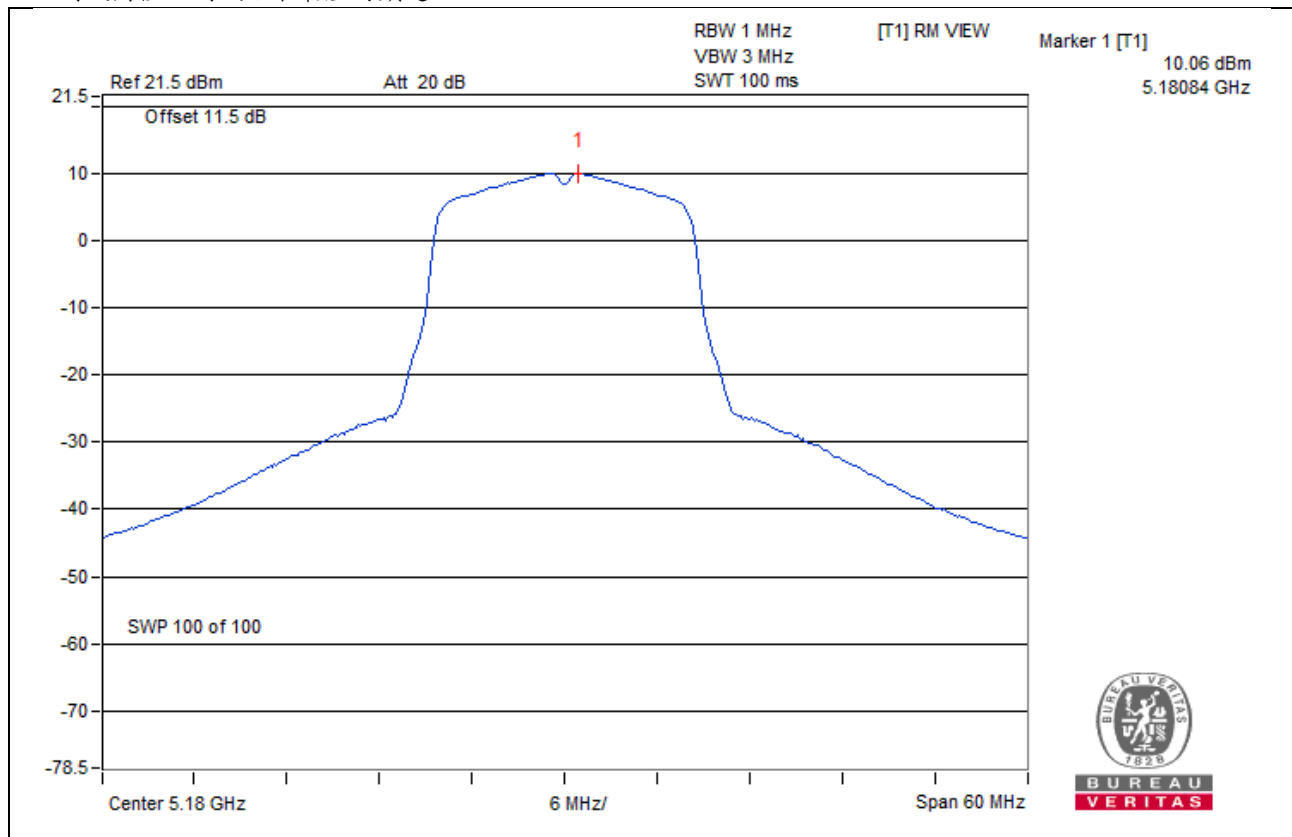

For 5745 ~ 5825MHz

802.11a

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor (dBm/500kHz)	10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
0	149	5745	6.14	3.01	0.21	9.36	30.00	Pass
	157	5785	5.95	3.01	0.21	9.17	30.00	Pass
	165	5825	6.11	3.01	0.21	9.33	30.00	Pass
1	149	5745	6.05	3.01	0.21	9.27	30.00	Pass
	157	5785	6.01	3.01	0.21	9.23	30.00	Pass
	165	5825	5.97	3.01	0.21	9.19	30.00	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure value and add 10 log (N_{ANT}) dB.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.36\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.
3. Refer to section 2.1 for duty cycle spectrum plot.

802.11ax (HE20)

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor (dBm/500kHz)	10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
0	149	5745	2.99	3.01	0.51	6.51	30.00	Pass
	157	5785	2.15	3.01	0.51	5.67	30.00	Pass
	165	5825	2.65	3.01	0.51	6.17	30.00	Pass
1	149	5745	3.02	3.01	0.51	6.54	30.00	Pass
	157	5785	1.88	3.01	0.51	5.40	30.00	Pass
	165	5825	2.48	3.01	0.51	6.00	30.00	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure value and add 10 log (N_{ANT}) dB.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.36\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.
3. Refer to section 2.1 for duty cycle spectrum plot.

802.11ax (HE40)

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor (dBm/500kHz)	10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
0	151	5755	-1.28	3.01	0.88	2.61	30.00	Pass
	159	5795	-0.72	3.01	0.88	3.17	30.00	Pass
1	151	5755	-1.46	3.01	0.88	2.43	30.00	Pass
	159	5795	-0.95	3.01	0.88	2.94	30.00	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure value and add 10 log (N_{ANT}) dB.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.36\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.
3. Refer to section 2.1 for duty cycle spectrum plot.


802.11ax (HE80)

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor (dBm/500kHz)	10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
0	155	5775	-17.67	3.01	0.81	-13.85	30.00	Pass
1	155	5775	-16.00	3.01	0.81	-12.18	30.00	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure value and add 10 log (N_{ANT}) dB.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.36\text{dBi} < 6\text{dBi}$, so the power limit not need to reduce.
3. Refer to section 2.1 for duty cycle spectrum plot.

**此測試圖僅放測試結果最差的頻道。

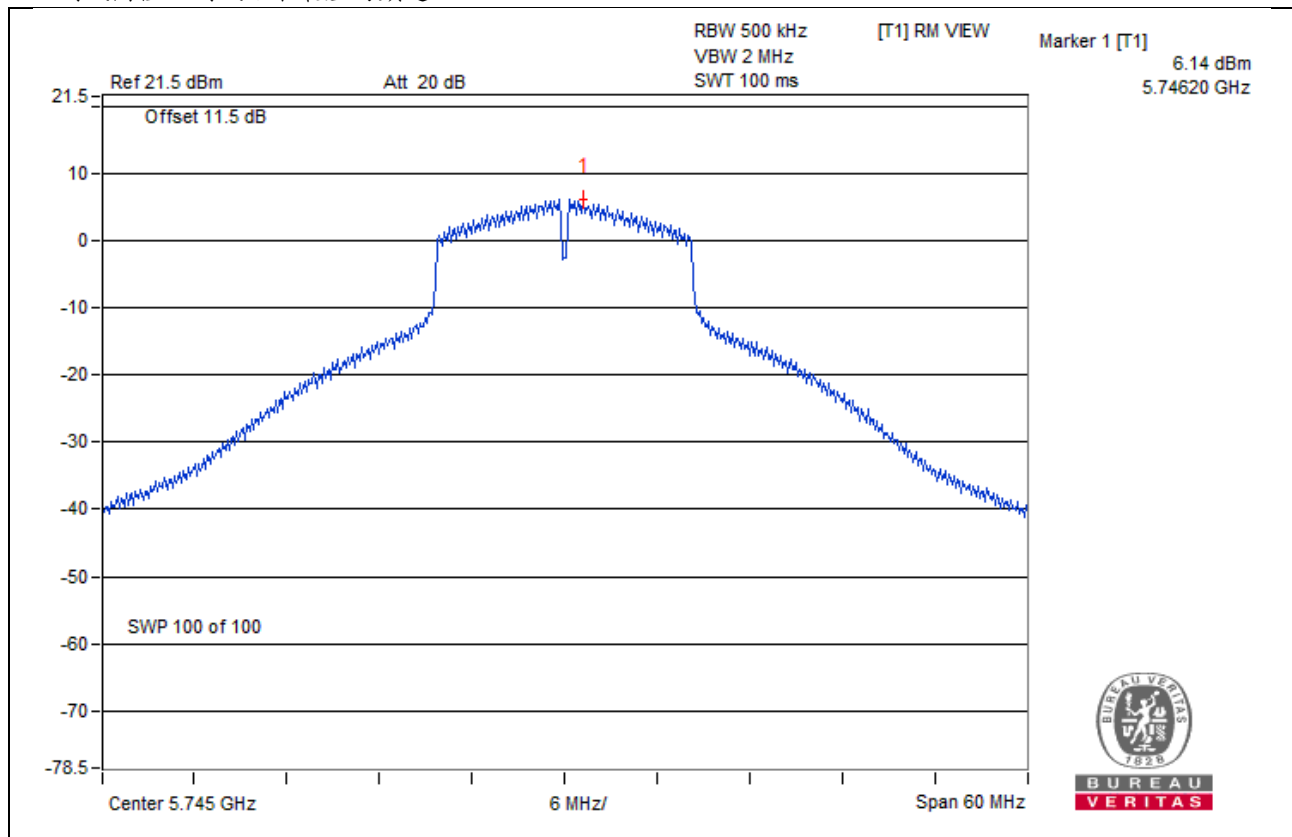

12.6 量測結果判定

依據測試數據結果，符合低功率射頻器材技術規範之要求。

13 6 dB 頻寬之要求

13.1 適用標準

待測物操作頻帶	適用標準
☒ 5.725 GHz~5.850 GHz	請見本報告 3.1 節第 5 項(II)的規定

13.2 量測方法

- a) 將待測物輸出經由衰減器接到頻譜分析儀上。
- b) 設定待測物處於連續發射狀態。
- c) 計算由最大輸出功率峰值減6dB的最大頻率範圍。

13.3 量測儀器

同 6.3 節。

13.4 測試配置

同 6.4 節。

13.5 量測結果

操作模式	發射	測試日期	110 年 08 月 05 日
量測場地溫度	25°C	量測場地濕度	60%RH
測試者	吳宗霖、王紀維		

802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
149	5745	15.16	15.16	0.50	Pass
157	5785	15.16	15.16	0.50	Pass
165	5825	15.16	15.14	0.50	Pass

802.11ax (HE20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
149	5745	16.32	15.18	0.50	Pass
157	5785	17.01	16.86	0.50	Pass
165	5825	15.83	16.66	0.50	Pass


802.11ax (HE40)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
151	5755	35.20	36.20	0.50	Pass
159	5795	35.64	35.22	0.50	Pass

802.11ax (HE80)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
155	5775	75.25	75.34	0.50	Pass

**此測試圖僅放測試結果最差的頻道。

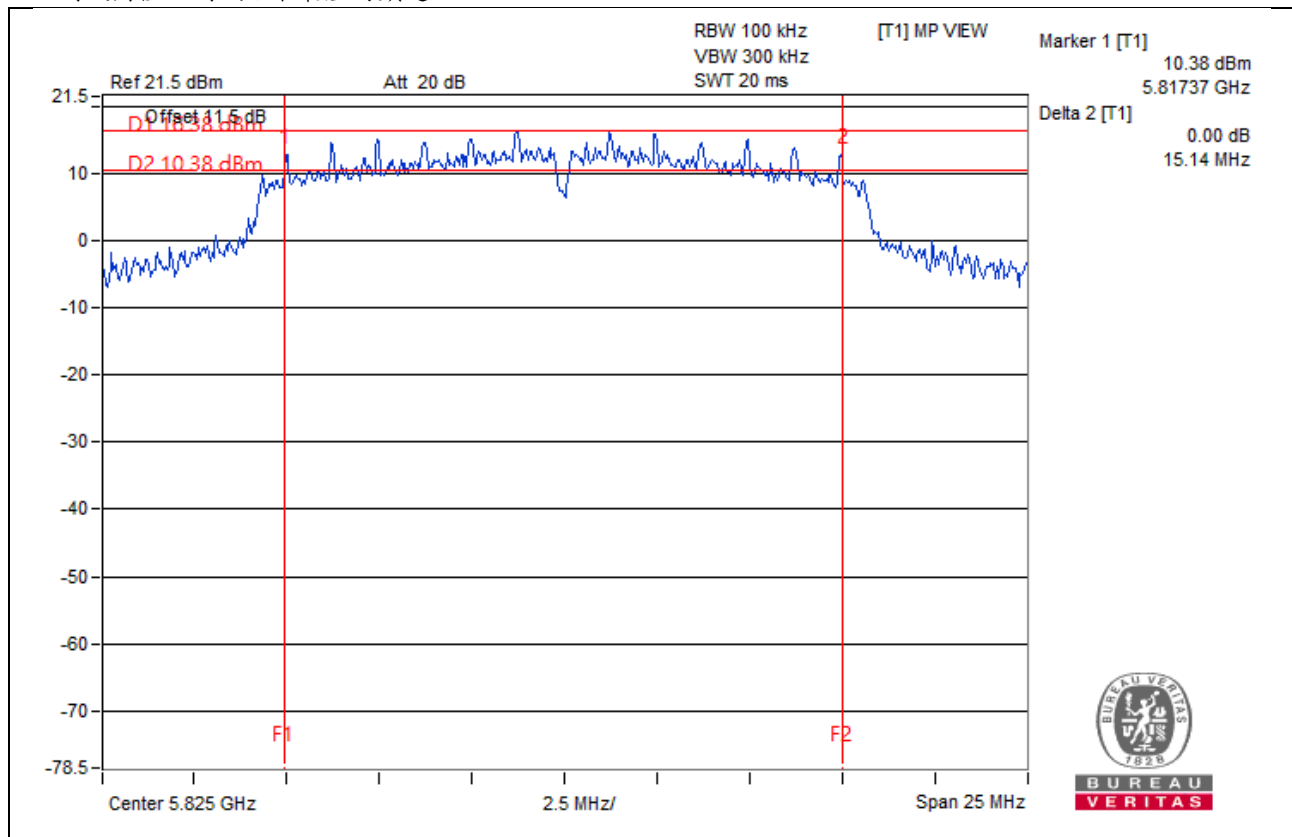

13.6 量測結果判定

依據測試數據結果，符合低功率射頻器材技術規範之要求。

14 電波暴露量之評估

14.1 適用標準

請見本報告3.1節第12項的規定。

14.2 評估方法

a) 以第7.5、11.5節所測得的最大輸出功率值再加上待測物天線的增益值(Gain)帶入下面公式換算出待測物所輻射的功率密度。

b) $P_d = (P_{out} * G) / (4 * \pi * r^2)$

where

P_d = power density in mW/cm²

P_{out} = output power to antenna in mW

G = gain of antenna in linear scale

π = 3.1416

R = distance between observation point and center of the radiator in cm

14.3 評估結果

Frequency Band (MHz)	Max AV Power (dBm)	Antenna Gain (dBi)	Distance (cm)	Power Density (mW/cm ²)	Limit (mW/cm ²)
CDD Mode					
2412-2462	27.65	4.82	20	0.351	1.00
5180-5240	27.98	5.36	20	0.429	1.00
5745-5825	29.07	5.36	20	0.552	1.00
Beamforming Mode					
2412-2462	27.15	4.82	20	0.313	1.00
5180-5240	27.92	5.36	20	0.423	1.00
5745-5825	28.98	5.36	20	0.540	1.00

Note:

1. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
2. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

2412-2462MHz: Directional gain = $1.81\text{dBi} + 10\log(2) = 4.82\text{dBi}$.

5180-5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.36\text{dBi}$.

5745-5825MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.36\text{dBi}$.

Conclusion:

Both of the WLAN 2.4G & WLAN 5G can transmit simultaneously, the formula of calculated the MPE is:

$\text{CPD1} / \text{LPD1} + \text{CPD2} / \text{LPD2} + \dots \text{etc.} < 1$

CPD = Calculation power density

LPD = Limit of power density

$2.4\text{GHz} + 5\text{GHz} = 0.351 / 1 + 0.552 / 1 = 0.903 < 1$

15 檢測實驗室基本資料

立德國際商品試驗有限公司桃園分公司提供產業界最佳的檢測以及諮詢服務。
本公司為ISO/IEC 17025認可實驗室。

如您有任何問題或建議，請與下列實驗室聯絡：

林口 EMC / RF 實驗室：

Tel: 886-2-26052180

Fax: 886-2-26051924

新竹 EMC / RF 及通訊實驗室：

Tel: 886-3-6668565

Fax: 886-3-6668323

華亞 EMC / RF / Safety 實驗室：

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

您也可以在我们的網站內找到各實驗室的地圖。

---END---