

附錄一

受測裝置之測試結果

目錄	頁次
1. 場強輻射之量測.....	2
1.1. 30-1000MHz 頻率範圍，其他不必要發射量測	3
1.2. 1000MHz 以上頻率範圍，其他不必要發射量測	4
1.3. 禁用頻帶量測結果 (其他不必要發射).....	6
2. 20dB 頻寬之量測.....	10
2.1. 20dB 頻寬.....	10
2.2. 20dB 頻寬之量測圖	11
3. 載波頻率間隔之量測.....	12
3.1. 載波頻率間隔.....	12
3.2. 載波頻率間隔之量測圖.....	13
4. 跳頻頻率數目之量測.....	15
5. 佔用時間(停留時間)之量測.....	16
5.1. 佔用時間(停留時間).....	16
6. 峰值輸出功率之量測.....	28
6.1. 峰值輸出功率.....	28
6.2. 峰值輸出功率之量測圖.....	28
7. 頻帶邊緣之 RF 傳導發射之量測	29
8. 混附發射之 RF 傳導發射之量測	30

1. 場強輻射之量測

【經實驗室評估量測後，以最差之調變方式 8DPSK 進行本章節之測試】

對受測物裝置之其他不必要之發射(測至本地振盪頻率之 10 次諧波)依下列測試模式分別於電波暗室內進行量測，實驗室先以三種不同的擺設方式(平放、站立、側立)模式進行量試評估，最後選取最大場強值的擺設方式-(平放)以低、中、高頻率來進行量測，並將下列測試模式之測試數據隨案件所附；所得讀值資料請見章節 1.1 ~1.2：

模式	動作狀態	基本頻率	量測頻率範圍
BT (8-DPSK)	發射	2402MHz	1000-25000MHz
		2441MHz*	30-1000MHz
			1000-25000MHz
		2480MHz	1000-25000MHz
BT	接收	2441MHz	30-1000MHz
			1000-25000MHz

註：*：經評估後，以最差頻率進行 30-1000MHz 量測。

對受測物裝置落於技術規範第 2.7 章節的禁用頻率之混附發射以下列測試模式依規定分別進行量測，所得量測資料請見章節 1.3。

模式	動作狀態	基本頻率	量測頻率範圍
BT (8DPSK)	發射	2402MHz	2310-2410MHz
		2480MHz	2450-2900MHz

測試日期	2020/02/25	環境溫/濕度	20°C/55%
測試電壓	DC 3.3V (透過治具連接筆記型電腦供電)	測試人員	Kuper Hsu

1.1. 30-1000MHz 頻率範圍，其他不必要發射量測

Mode	BT (8DPSK)	Frequency	TX 2441MHz
------	------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
71.710	12.61	2.05	14.53	29.19	40.00	10.81	Peak
167.740	15.86	3.23	20.70	39.79	43.50	3.71	Peak
345.250	20.53	5.22	8.01	33.76	46.00	12.24	Peak
828.310	26.31	8.30	3.51	38.12	46.00	7.88	Peak
938.890	27.05	8.89	3.17	39.11	46.00	6.89	Peak
976.720	27.26	9.06	1.63	37.95	54.00	16.05	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
71.710	12.61	2.05	10.07	24.73	40.00	15.27	Peak
167.740	15.86	3.23	13.21	32.30	43.50	11.20	Peak
345.250	20.53	5.22	6.12	31.87	46.00	14.13	Peak
482.990	23.22	6.77	4.53	34.52	46.00	11.48	Peak
832.190	26.35	8.32	7.18	41.85	46.00	4.15	Peak
989.330	27.34	9.11	2.36	38.81	54.00	15.19	Peak

Mode	BT	Frequency	RX 2441MHz
------	----	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
71.710	12.61	2.05	14.26	28.92	40.00	11.08	Peak
167.740	15.86	3.23	20.25	39.34	43.50	4.16	Peak
276.380	19.01	4.30	12.37	35.68	46.00	10.32	Peak
483.960	23.25	6.78	4.26	34.29	46.00	11.71	Peak
849.650	26.48	8.42	4.88	39.78	46.00	6.22	Peak
963.140	27.19	9.00	2.92	39.11	54.00	14.89	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
71.710	12.61	2.05	11.13	25.79	40.00	14.21	Peak
167.740	15.86	3.23	12.74	31.83	43.50	11.67	Peak
345.250	20.53	5.22	5.88	31.63	46.00	14.37	Peak
483.960	23.25	6.78	3.77	33.80	46.00	12.20	Peak
828.310	26.31	8.30	6.42	41.03	46.00	4.97	Peak
981.570	27.30	9.08	1.43	37.81	54.00	16.19	Peak

1.2. 1000MHz 以上頻率範圍，其他不必要發射量測

頻率範圍量測至主波發射的 10 倍諧波，其他未列在報告上乃因訊號太小無法量測。

Mode	BT (8DPSK)	Frequency	TX 2402MHz
------	------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4806.000	33.92	10.22	5.72	49.86	54.00	4.14	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.92	10.22	8.08	52.22	54.00	1.78	Peak

Mode	BT (8DPSK)	Frequency	TX 2441MHz
------	------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4882.000	34.36	10.24	3.87	48.47	54.00	5.53	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4882.000	34.36	10.24	8.62	53.22	54.00	0.78	Peak

Mode	BT (8DPSK)	Frequency	TX 2480MHz
------	------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	34.32	10.27	0.28	44.87	54.00	9.13	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	34.32	10.27	4.86	49.45	54.00	4.55	Peak

Mode	BT	Frequency	RX 2441MHz
------	----	-----------	------------

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4882.000	34.36	10.24	-2.17	42.43	54.00	11.57	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4882.000	34.36	10.24	-2.27	42.33	54.00	11.67	Peak


1.3. 禁用頻帶量測結果 (其他不必要發射)

Mode	BT (8DPSK)	Frequency	TX 2402MHz
------	------------	-----------	------------

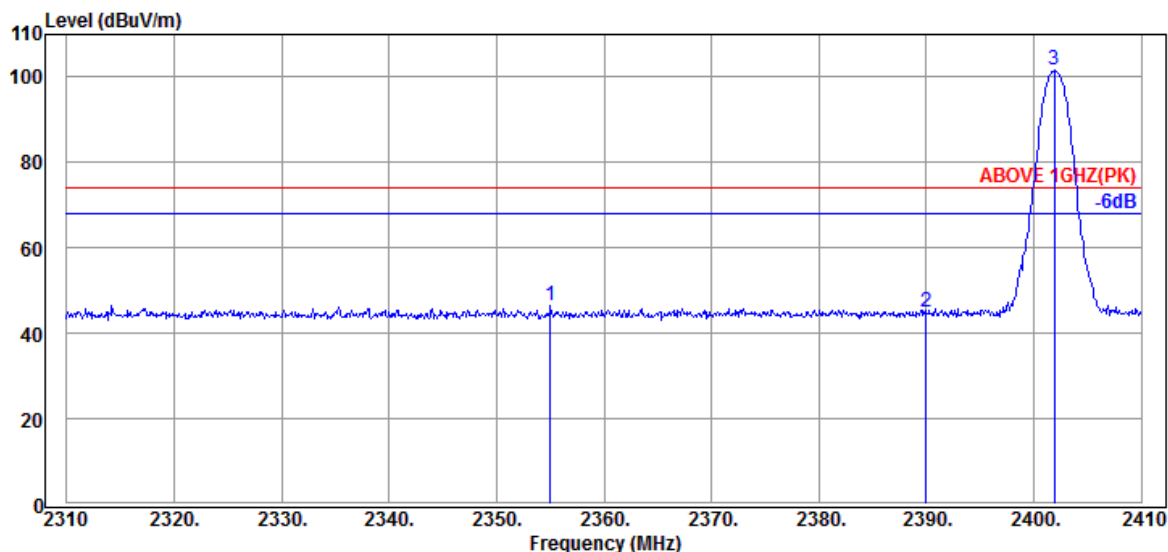

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2355.000	32.00	8.49	5.89	46.38	74.00	27.62	Peak
2390.000	32.00	8.52	4.28	44.80	74.00	29.20	Peak
@ 2401.900	32.03	8.52	61.05	101.60	---	---	Peak

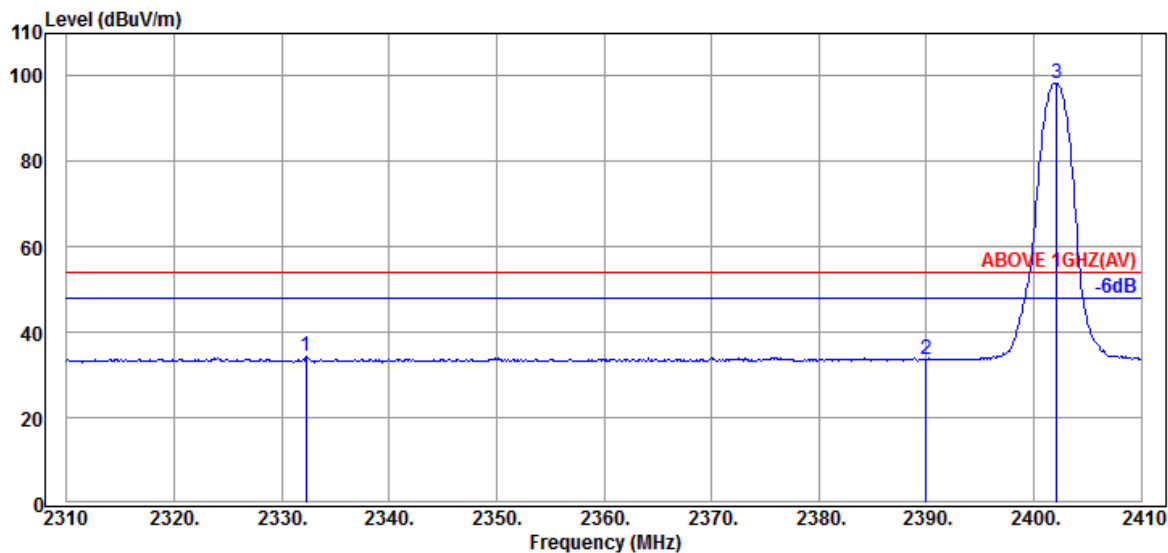


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2332.300	32.00	8.47	-6.20	34.27	54.00	19.73	Average
2390.000	32.00	8.52	-6.88	33.64	54.00	20.36	Average
@ 2402.100	32.03	8.52	57.84	98.39	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	BT (8DPSK)	Frequency	TX 2402MHz
------	------------	-----------	------------

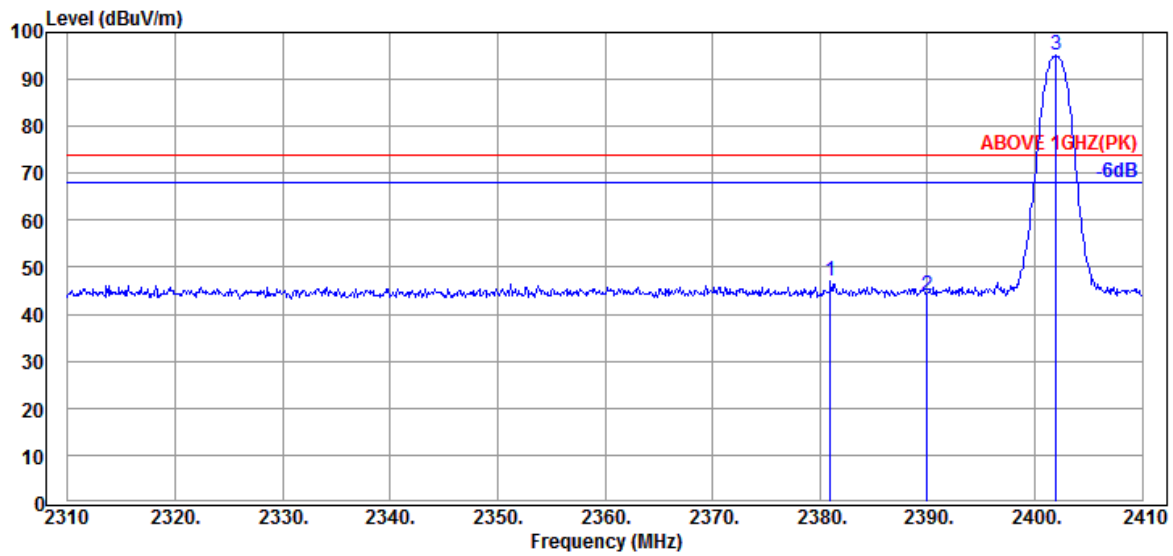

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2381.000	32.00	8.51	6.64	47.15	74.00	26.85	Peak
2390.000	32.00	8.52	3.51	44.03	74.00	29.97	Peak
@ 2402.000	32.03	8.52	54.68	95.23	---	---	Peak

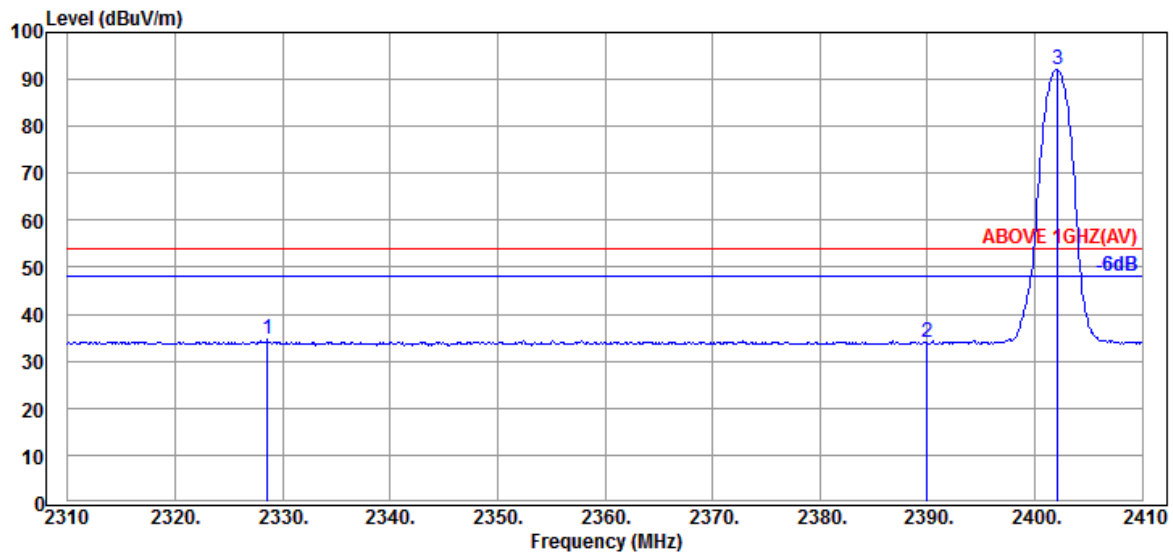


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2328.600	32.00	8.47	-5.89	34.58	54.00	19.42	Average
2390.000	32.00	8.52	-6.64	33.88	54.00	20.12	Average
@ 2402.100	32.03	8.52	51.49	92.04	---	---	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	BT (8DPSK)	Frequency	TX 2480MHz
------	------------	-----------	------------

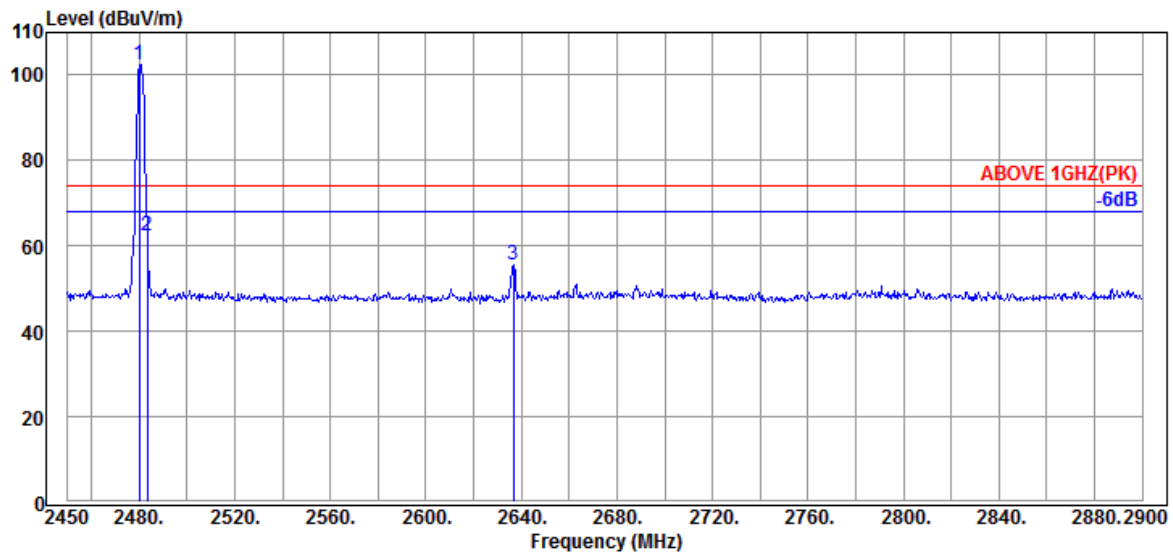

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.150	32.58	8.58	61.29	102.45	---	---	Peak
	2483.300	32.57	8.58	21.25	62.40	74.00	11.60	Peak
	2636.750	32.03	8.62	14.75	55.40	74.00	18.60	Peak

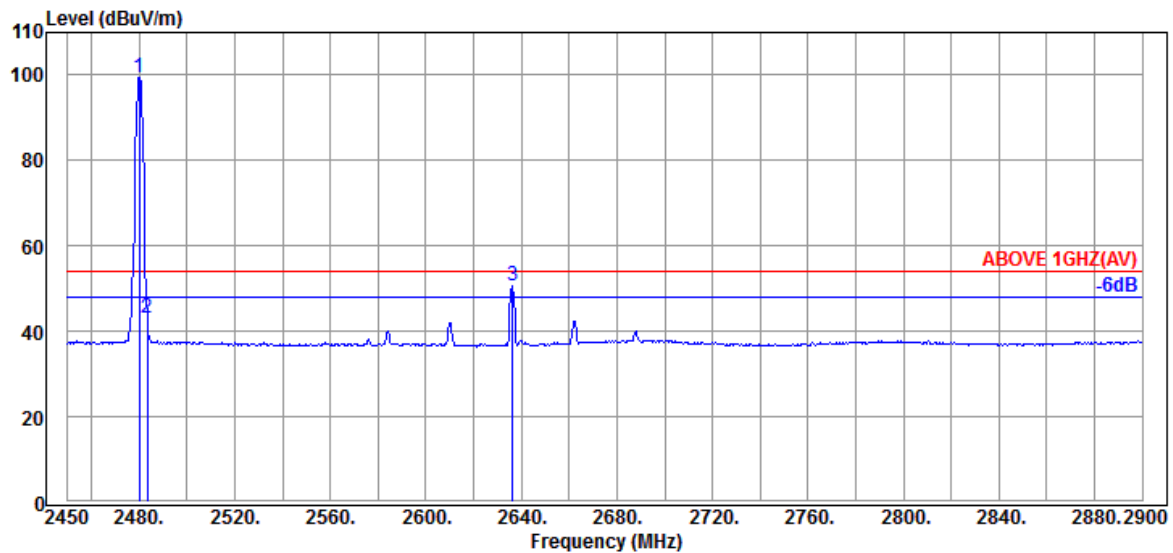


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.150	32.58	8.58	58.34	99.50	---	---	Average
	2483.300	32.57	8.58	1.89	43.04	54.00	10.96	Average
	2636.300	32.03	8.62	10.16	50.81	54.00	3.19	Average


備註：“@”為主波，在此章節是不予以判定。

Mode	BT (8DPSK)	Frequency	TX 2480MHz
------	------------	-----------	------------

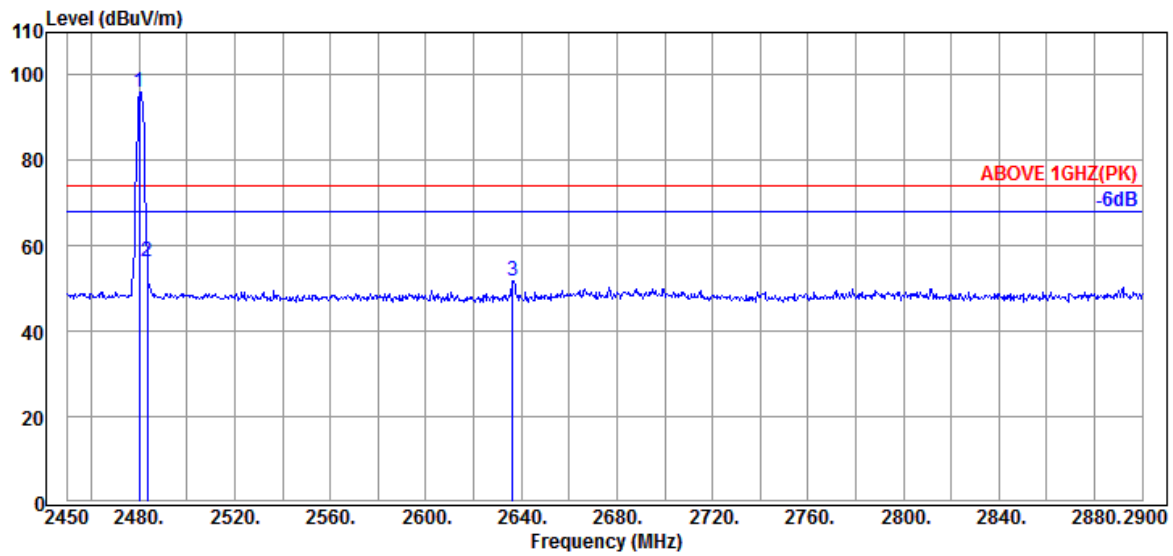

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.150	32.58	8.58	54.93	96.09	---	---	Peak
	2483.300	32.57	8.58	15.24	56.39	74.00	17.61	Peak
	2636.300	32.03	8.62	11.20	51.85	74.00	22.15	Peak

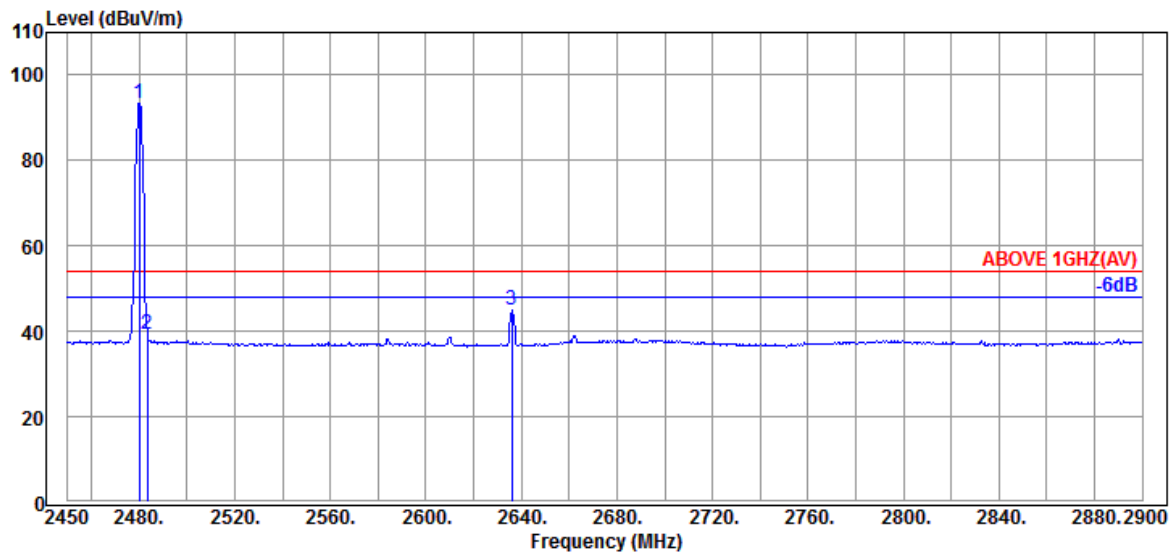

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.150	32.58	8.58	52.31	93.47	---	---	Average
	2483.300	32.57	8.58	-1.86	39.29	54.00	14.71	Average
	2635.850	32.03	8.62	4.52	45.17	54.00	8.83	Average

備註：“@”為主波，在此章節是不予以判定。


2. 20dB 頻寬之量測

測試日期	2020/02/20	環境溫/濕度	18°C/56%
電纜損失	0.50dB	測試人員	Kuper Hsu
測試電壓	DC 3.3V (透過治具連接筆記型電腦供電)		

2.1. 20dB 頻寬

模式	測試頻率 (MHz)	20dB 頻寬 (MHz)	頻道間隔參考限制值 2/3 (20dB 頻寬) (MHz)
GFSK	2402	0.9229	0.615
	2441	0.9227	0.615
	2480	0.9225	0.615
8-DPSK	2402	1.268	0.845
	2441	1.272	0.848
	2480	1.271	0.847

2.2. 20dB 頻寬之量測圖

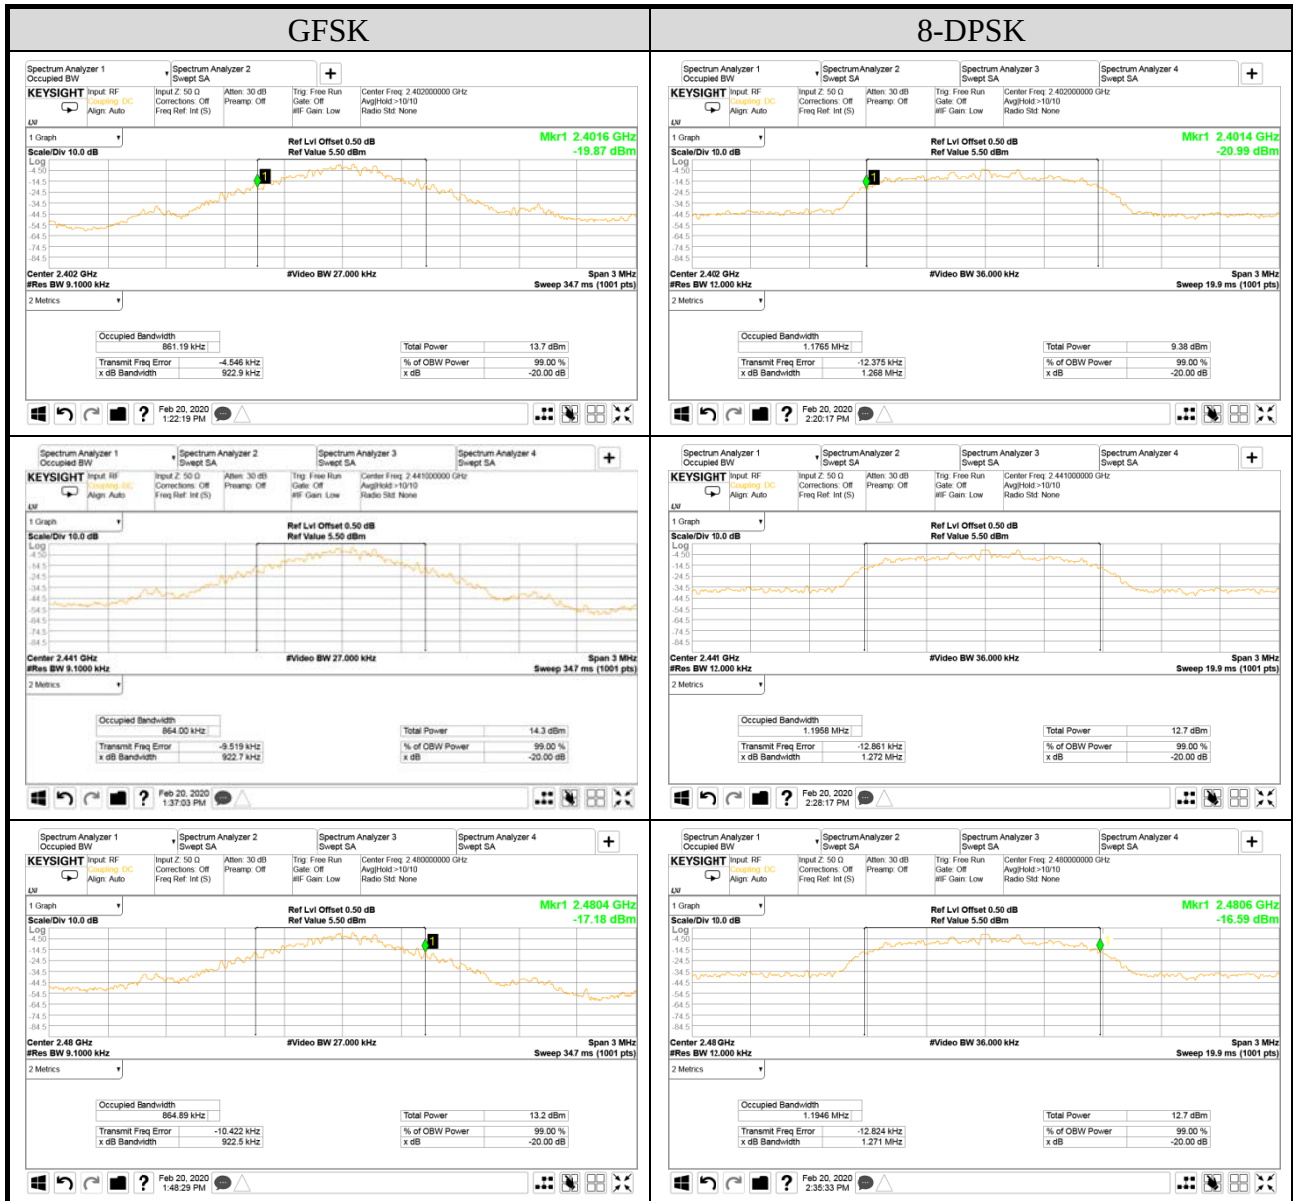


3. 載波頻率間隔之量測


測試日期	2020/02/20	環境溫/濕度	18°C/56%
電纜損失	0.50dB	測試人員	Kuper Hsu
測試電壓	DC 3.3V (透過治具連接筆記型電腦供電)		

3.1. 載波頻率間隔

模式 (Mode)	測試頻率 (MHz)	頻道間隔(MHz)	頻道間隔參考限制值 2/3 (20dB 頻寬) (MHz)
GFSK	2402	1.002	> 0.615
	2441 (左邊鄰近頻道)	1.002	
	2441 (右邊鄰近頻道)	1.002	
	2480	1.002	
8-DPSK	2402	1.002	> 0.848
	2441 (左邊鄰近頻道)	1.002	
	2441 (右邊鄰近頻道)	1.002	
	2480	1.002	


3.2. 載波頻率間隔之量測圖

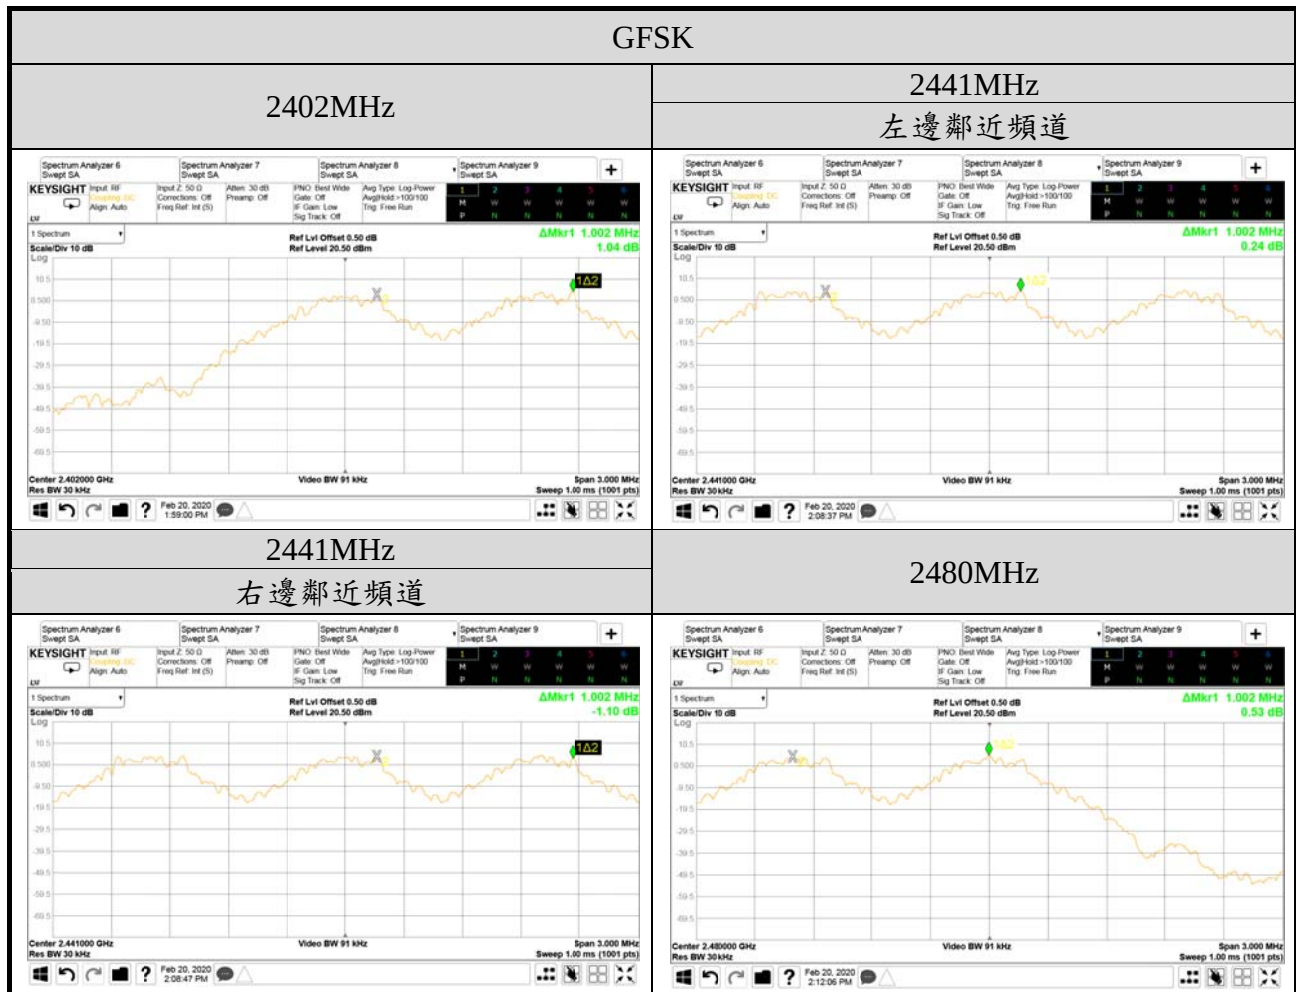

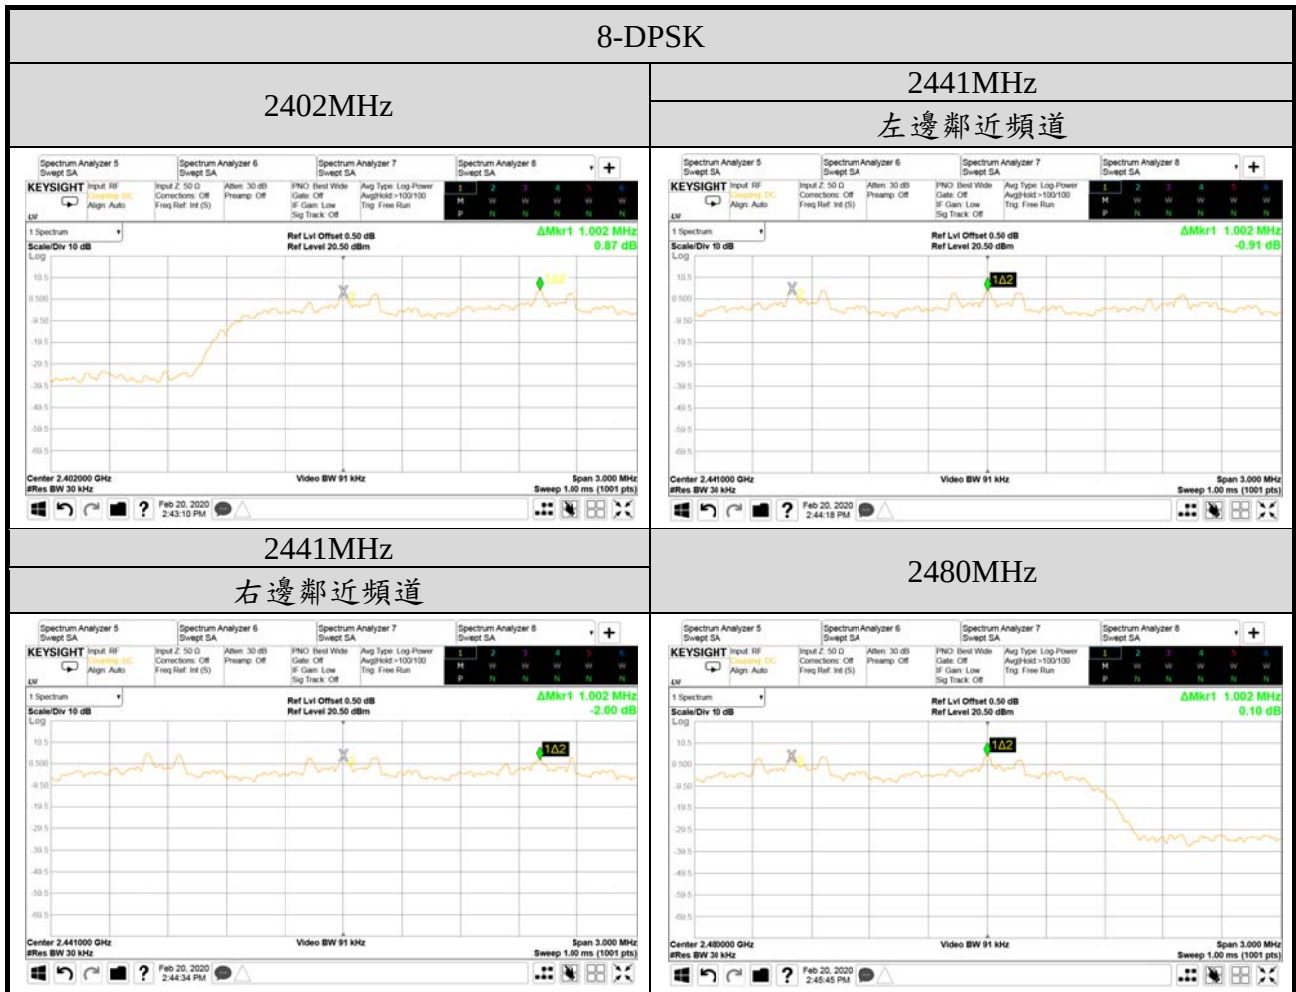

4. 跳頻頻率數目之量測

測試日期	2020/02/20	環境溫/濕度	18°C/56%
電纜損失	0.50dB	測試人員	Kuper Hsu
測試電壓	DC 3.3V (透過治具連接筆記型電腦供電)		

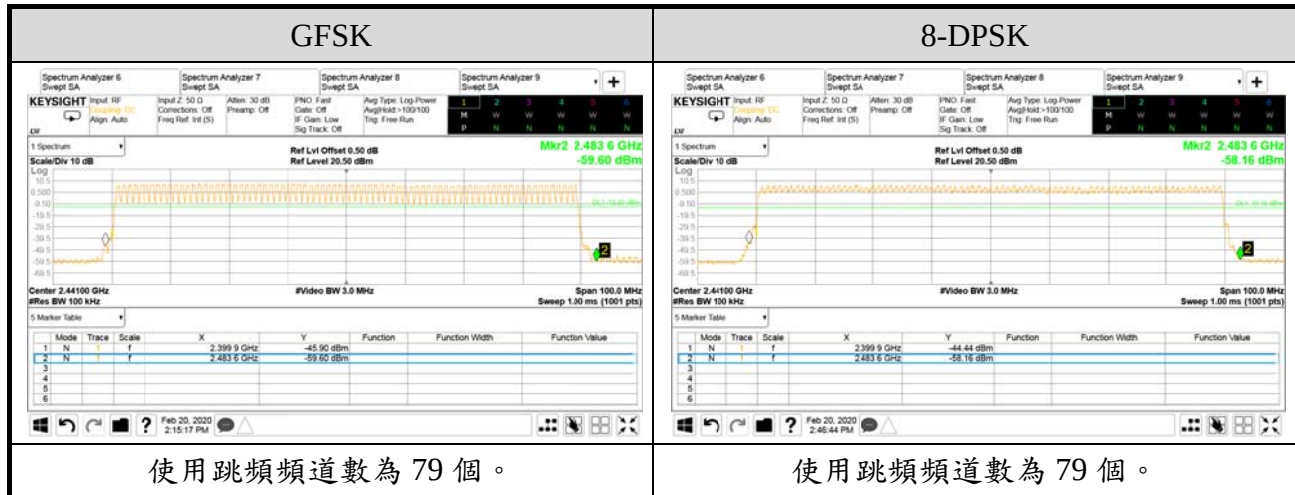

5. 佔用時間(停留時間)之量測

測試日期	2020/02/20	環境溫/濕度	18°C/56%
電纜損失	0.50dB	測試人員	Kuper Hsu
測試電壓	DC 3.3V (透過治具連接筆記型電腦供電)		

5.1. 佔用時間(停留時間)

模式	測試頻率 (MHz)	封包	每秒出現頻道數	佔用時間 (ms)	佔用時間加總 (ms)	限制值 (ms)
GFSK	2402	DH1	10	0.390	123.240	<400
		DH3	5	1.640	259.120	<400
		DH5	3	2.890	273.972	<400

週期之計算: $79 \text{ 頻道數} * 0.4 \text{ 秒} = 31.6 \text{ 秒}$

封包模式: DH1

以每1秒出現 10 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$$10 \text{ 頻道數} * 31.6 \text{ 秒} * 0.390 \text{ ms} = 123.240 \text{ ms} (<400\text{ms})$$

封包模式: DH3

以每1秒出現 5 個頻道數為例, 每 31.6 秒內之最長佔用時間為:


$$5 \text{ 頻道數} * 31.6 \text{ 秒} * 1.640 \text{ ms} = 259.120 \text{ ms} (<400\text{ms})$$

封包模式: DH5

以每1秒出現 3 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$$3 \text{ 頻道數} * 31.6 \text{ 秒} * 2.890 \text{ ms} = 273.972 \text{ ms} (<400\text{ms})$$

● 佔用時間(停留時間)之量測圖

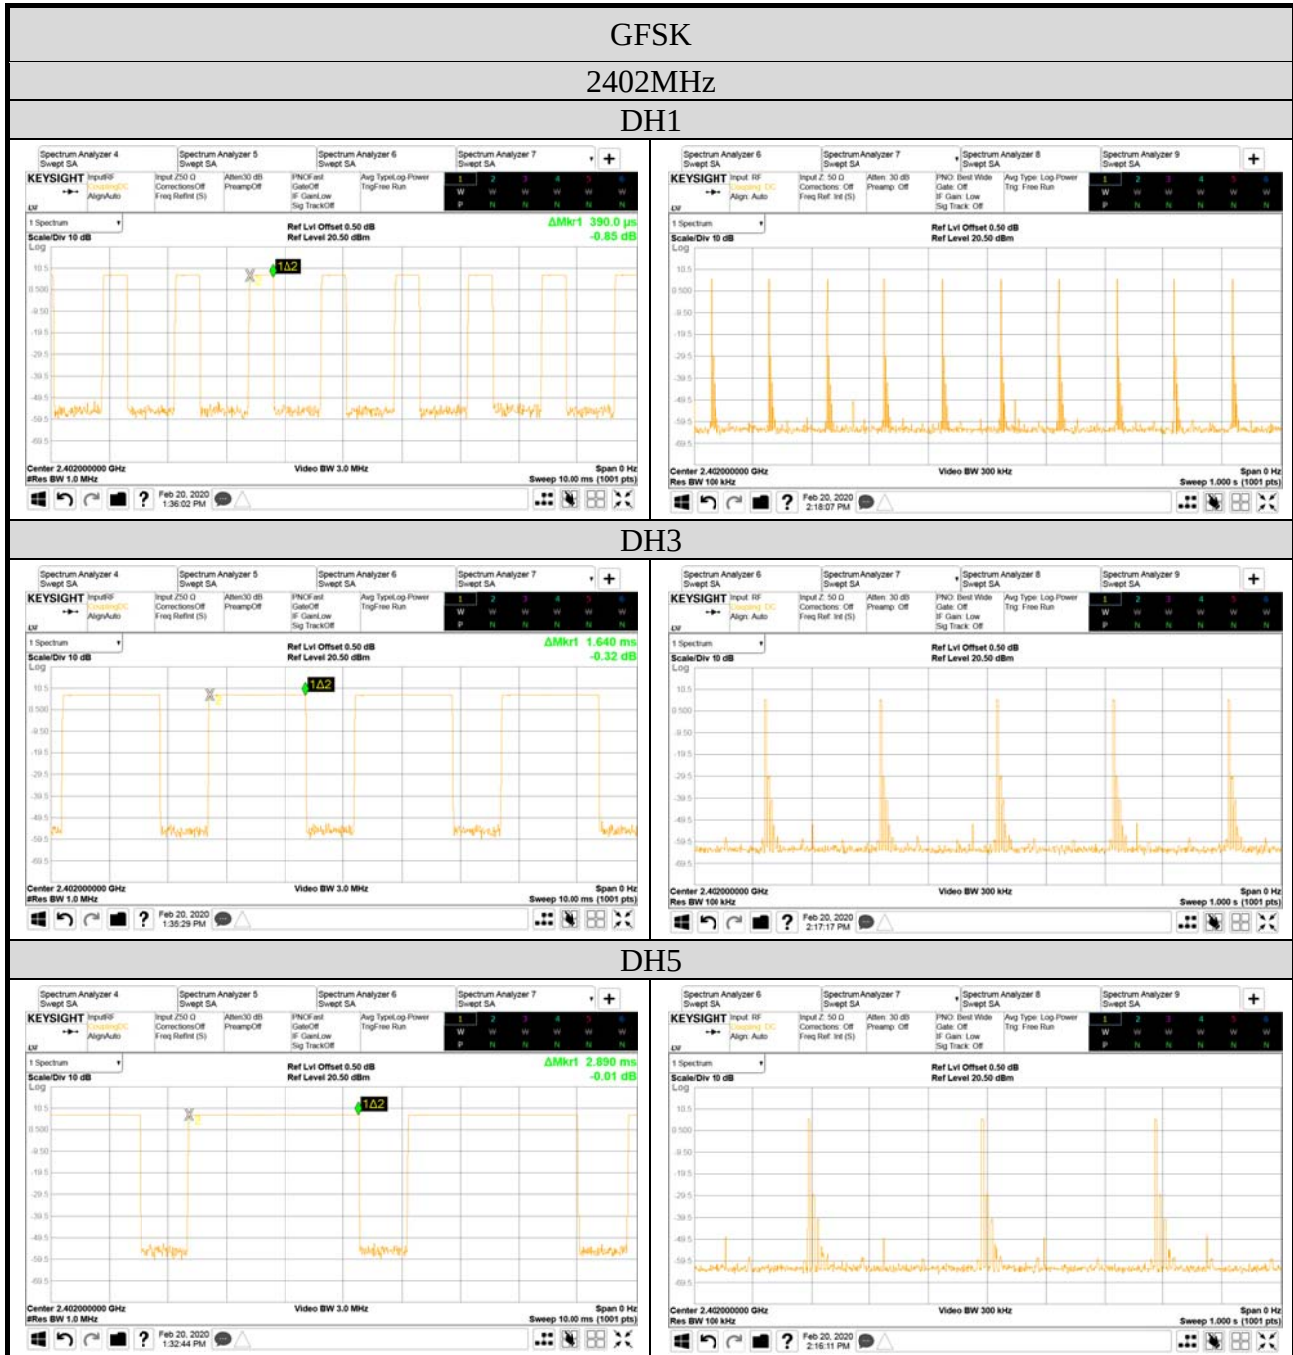

模式	測試頻率 (MHz)	封包	每秒出現 頻道數	佔用時間 (ms)	佔用時間加總 (ms)	限制值 (ms)
GFSK	2441	DH1	10	0.390	123.240	<400
		DH3	5	1.640	259.120	<400
		DH5	3	2.890	273.972	<400

週期之計算: $79 \text{ 頻道數} * 0.4 \text{ 秒} = 31.6 \text{ 秒}$

封包模式: DH1

以每1秒出現 10 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$$10 \text{ 頻道數} * 31.6 \text{ 秒} * 0.390 \text{ ms} = 123.240 \text{ ms} (<400\text{ms})$$

封包模式: DH3

以每1秒出現 5 個頻道數為例, 每 31.6 秒內之最長佔用時間為:


$$5 \text{ 頻道數} * 31.6 \text{ 秒} * 1.640 \text{ ms} = 259.120 \text{ ms} (<400\text{ms})$$

封包模式: DH5

以每1秒出現 3 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$$3 \text{ 頻道數} * 31.6 \text{ 秒} * 2.890 \text{ ms} = 273.972 \text{ ms} (<400\text{ms})$$

● 佔用時間(停留時間)之量測圖

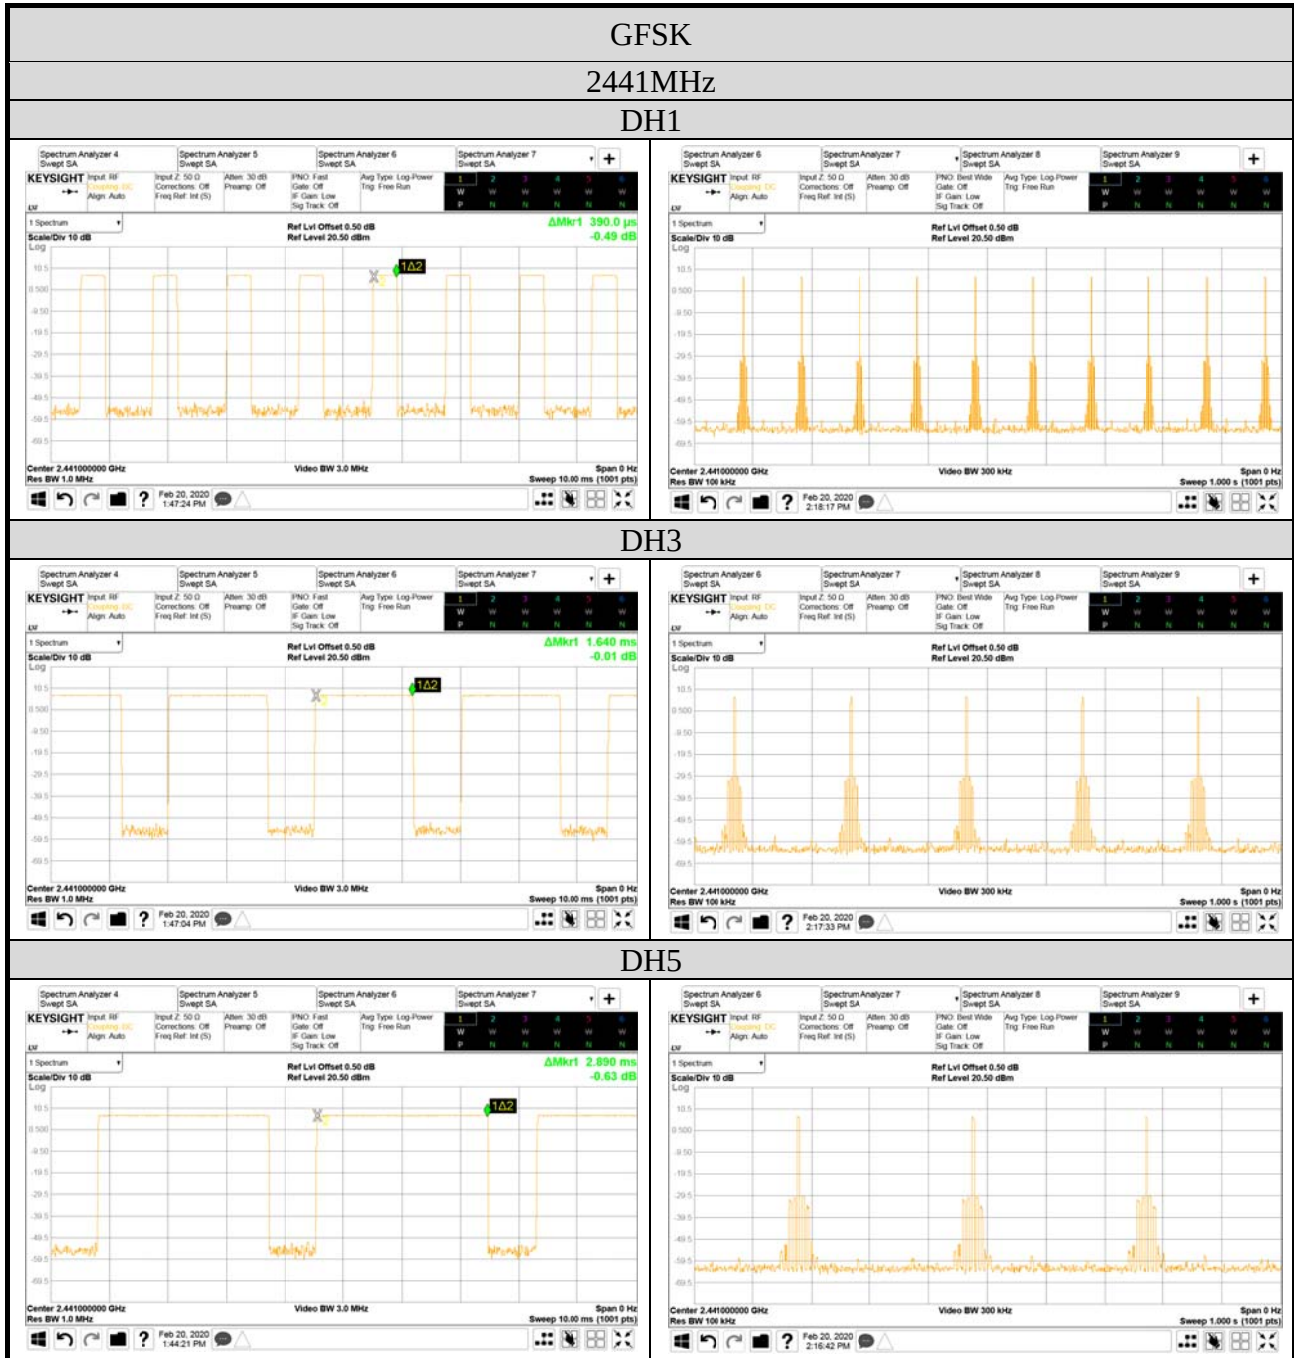

模式	測試頻率 (MHz)	封包	每秒出現 頻道數	佔用時間 (ms)	佔用時間加總 (ms)	限制值 (ms)
GFSK	2480	DH1	10	0.390	123.240	<400
		DH3	5	1.640	259.120	<400
		DH5	3	2.890	273.972	<400

週期之計算: $79 \text{ 頻道數} * 0.4 \text{ 秒} = 31.6 \text{ 秒}$

封包模式: DH1

以每1秒出現 10 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$$10 \text{ 頻道數} * 31.6 \text{ 秒} * 0.390 \text{ ms} = 123.240 \text{ ms} (<400\text{ms})$$

封包模式: DH3

以每1秒出現 5 個頻道數為例, 每 31.6 秒內之最長佔用時間為:


$$5 \text{ 頻道數} * 31.6 \text{ 秒} * 1.640 \text{ ms} = 259.120 \text{ ms} (<400\text{ms})$$

封包模式: DH5

以每1秒出現 3 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$$3 \text{ 頻道數} * 31.6 \text{ 秒} * 2.890 \text{ ms} = 273.972 \text{ ms} (<400\text{ms})$$

● 佔用時間(停留時間)之量測圖

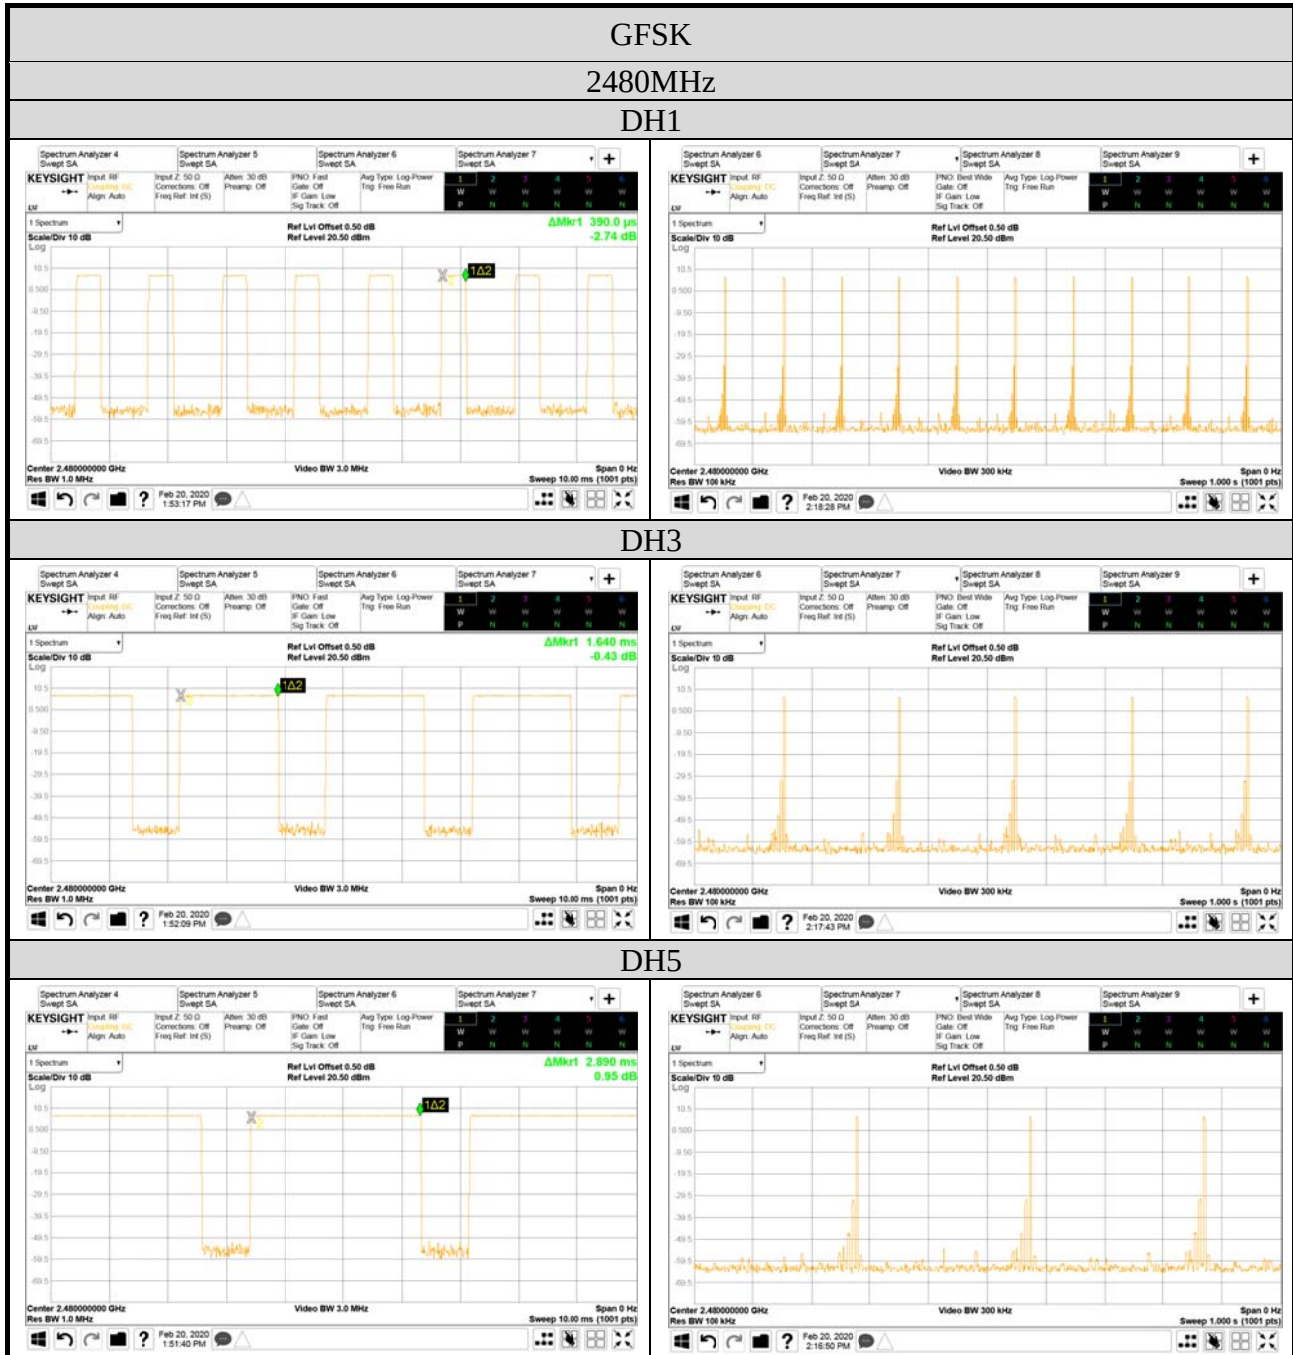

模式	測試頻率 (MHz)	封包	每秒出現 頻道數	佔用時間 (ms)	佔用時間加總 (ms)	限制值 (ms)
8-DPSK	2402	3DH1	10	0.390	123.240	<400
		3DH3	5	1.650	260.700	<400
		3DH5	3	2.900	274.920	<400

週期之計算: $79 \text{ 頻道數} * 0.4 \text{ 秒} = 31.6 \text{ 秒}$

封包模式: 3DH1

以每1秒出現 10 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$10 \text{ 頻道數} * 31.6 \text{ 秒} * 0.390 \text{ ms} = 123.240 \text{ ms} (<400\text{ms})$

封包模式: 3DH3

以每1秒出現 5 個頻道數為例, 每 31.6 秒內之最長佔用時間為:


$5 \text{ 頻道數} * 31.6 \text{ 秒} * 1.650 \text{ ms} = 260.700 \text{ ms} (<400\text{ms})$

封包模式: 3DH5

以每1秒出現 3 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$3 \text{ 頻道數} * 31.6 \text{ 秒} * 2.900 \text{ ms} = 274.920 \text{ ms} (<400\text{ms})$

● 佔用時間(停留時間)之量測圖

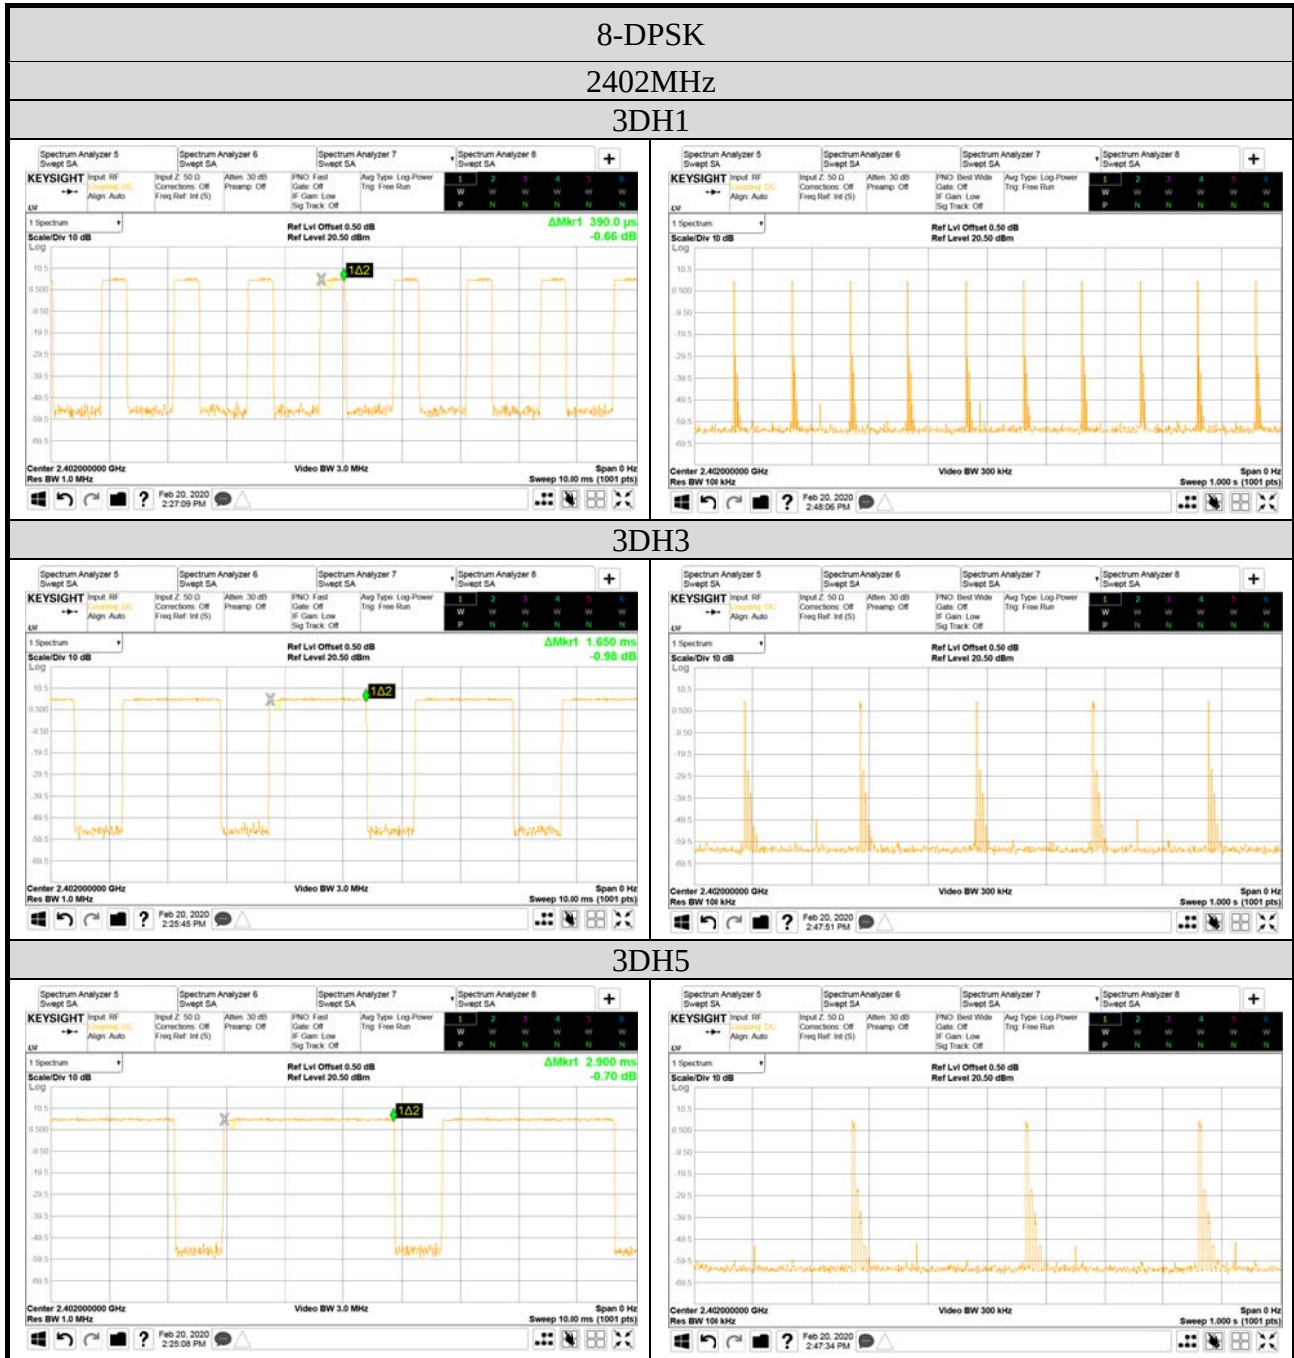

模式	測試頻率 (MHz)	封包	每秒出現 頻道數	佔用時間 (ms)	佔用時間加總 (ms)	限制值 (ms)
8-DPSK	2441	3DH1	10	0.390	123.240	<400
		3DH3	5	1.650	260.700	<400
		3DH5	3	2.900	274.920	<400

週期之計算: $79 \text{ 頻道數} * 0.4 \text{ 秒} = 31.6 \text{ 秒}$

封包模式: 3DH1

以每1秒出現 10 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$10 \text{ 頻道數} * 31.6 \text{ 秒} * 0.390 \text{ ms} = 123.240 \text{ ms} (<400\text{ms})$

封包模式: 3DH3

以每1秒出現 5 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$5 \text{ 頻道數} * 31.6 \text{ 秒} * 1.650 \text{ ms} = 260.700 \text{ ms} (<400\text{ms})$

封包模式: 3DH5

以每1秒出現 3 個頻道數為例, 每 31.6 秒內之最長佔用時間為:


$3 \text{ 頻道數} * 31.6 \text{ 秒} * 2.900 \text{ ms} = 274.920 \text{ ms} (<400\text{ms})$

● 佔用時間(停留時間)之量測圖

8-DPSK

2441MHz

3DH1

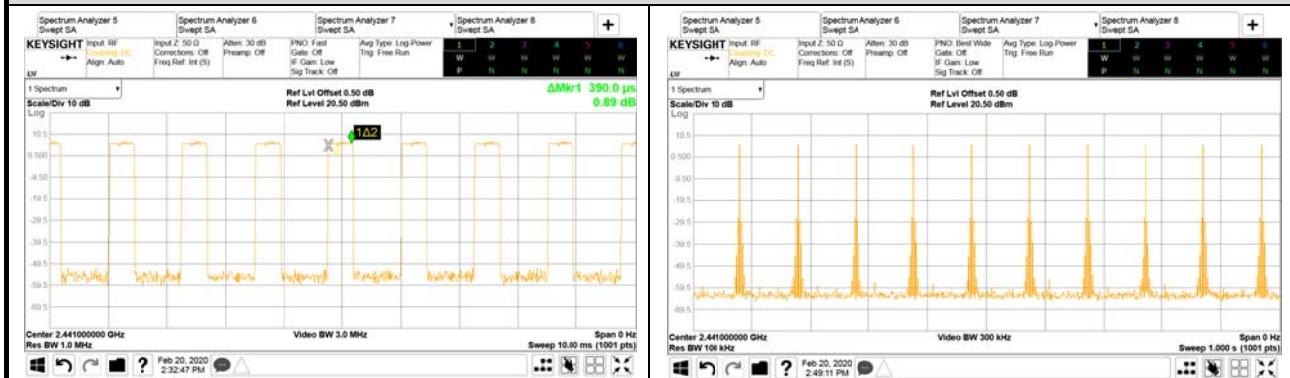

3DH3



3DH5



模式	測試頻率 (MHz)	封包	每秒出現 頻道數	佔用時間 (ms)	佔用時間加總 (ms)	限制值 (ms)
8-DPSK	2480	3DH1	10	0.390	123.240	<400
		3DH3	5	1.650	260.700	<400
		3DH5	3	2.900	274.920	<400

週期之計算: $79 \text{ 頻道數} * 0.4 \text{ 秒} = 31.6 \text{ 秒}$

封包模式: 3DH1

以每1秒出現 10 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$10 \text{ 頻道數} * 31.6 \text{ 秒} * 0.390 \text{ ms} = 123.240 \text{ ms} (<400\text{ms})$

封包模式: 3DH3

以每1秒出現 5 個頻道數為例, 每 31.6 秒內之最長佔用時間為:


$5 \text{ 頻道數} * 31.6 \text{ 秒} * 1.650 \text{ ms} = 260.700 \text{ ms} (<400\text{ms})$

封包模式: 3DH5

以每1秒出現 3 個頻道數為例, 每 31.6 秒內之最長佔用時間為:

$3 \text{ 頻道數} * 31.6 \text{ 秒} * 2.900 \text{ ms} = 274.920 \text{ ms} (<400\text{ms})$

● 佔用時間(停留時間)之量測圖

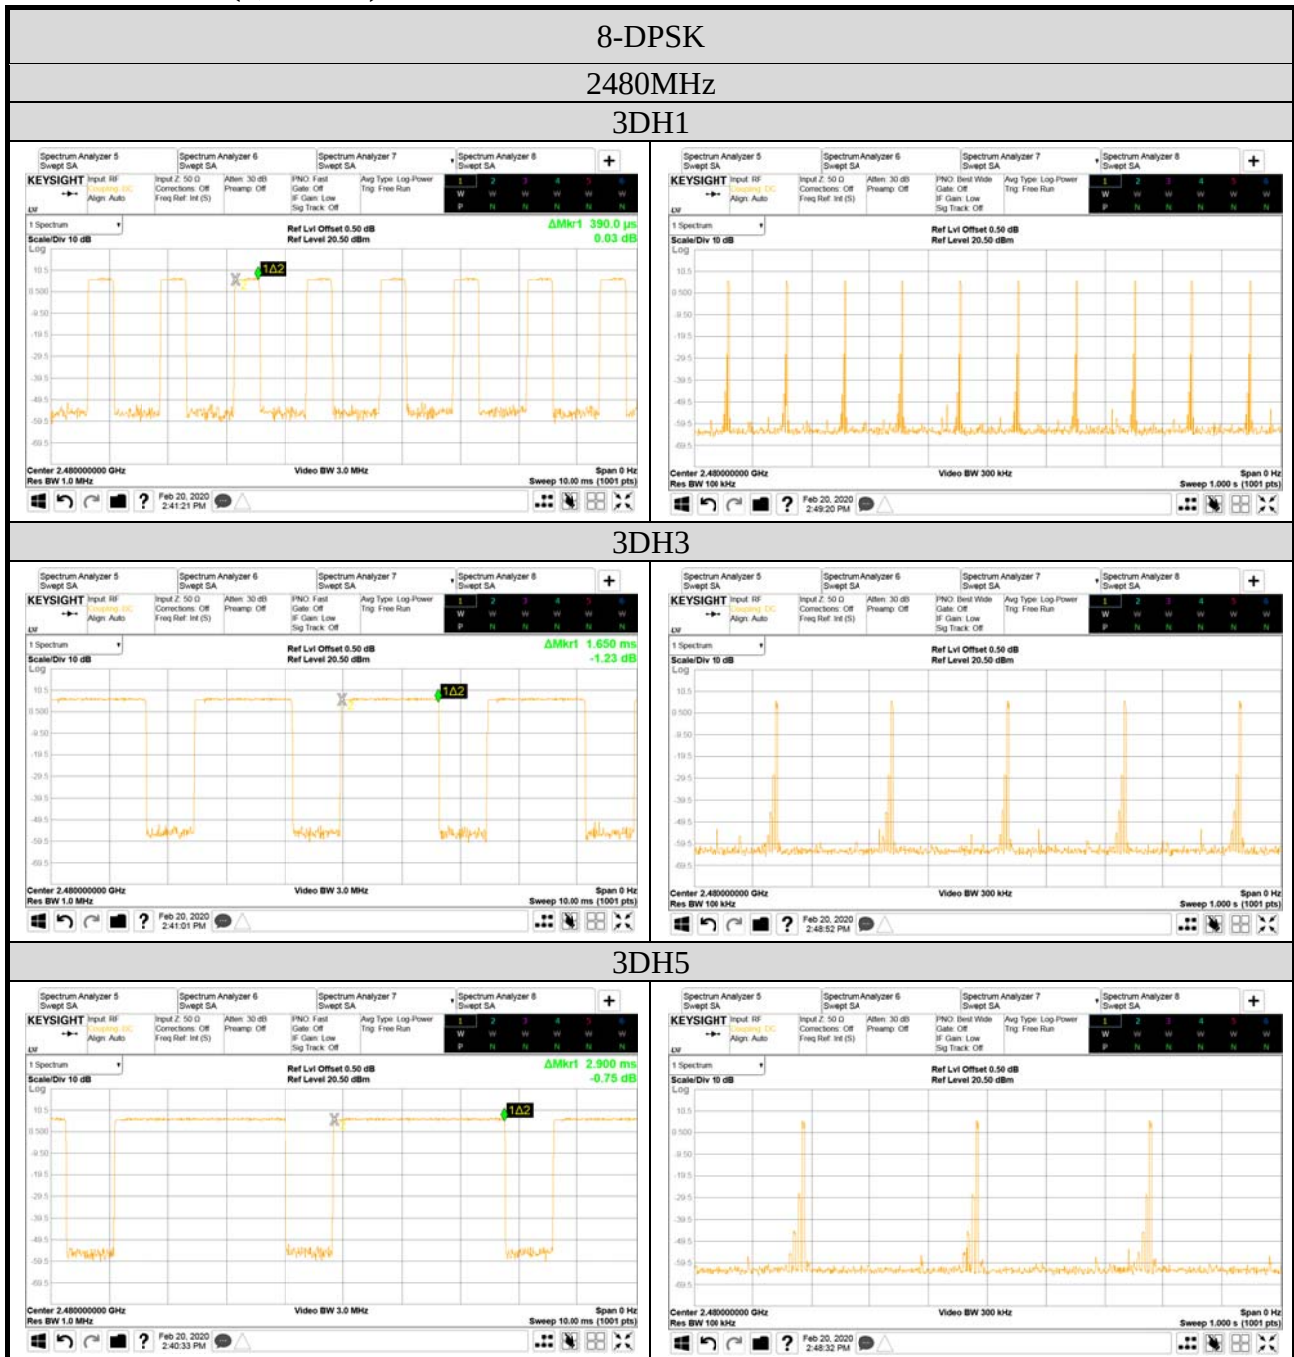


6. 峰值輸出功率之量測

測試日期	2020/02/20	環境溫/濕度	18°C/56%
電纜損失	0.50dB	測試人員	Kuper Hsu
測試電壓	DC 3.3V (透過治具連接筆記型電腦供電)		

6.1. 峰值輸出功率



模式	測試頻率 (MHz)	峰值輸出功率(dBm)
GFSK	2402	6.28
	2441	7.31
	2480	7.26
8-DPSK	2402	6.40
	2441	7.35
	2480	7.31

6.2. 峰值輸出功率之量測圖

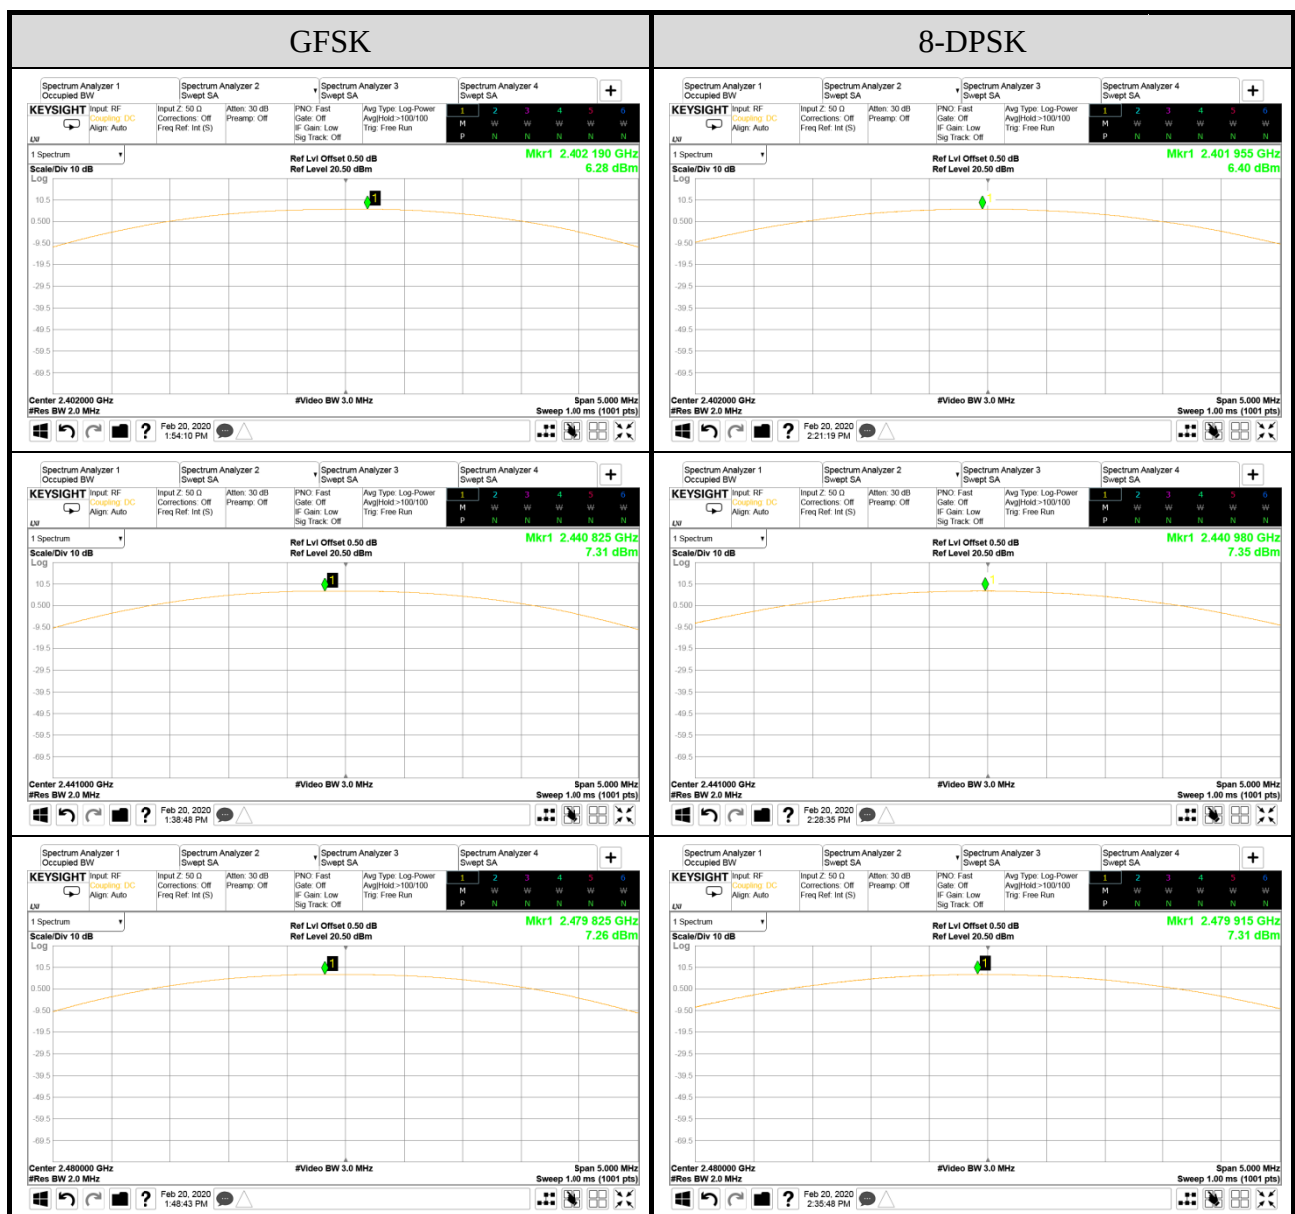

7. 頻帶邊緣之 RF 傳導發射之量測

測試日期	2020/02/20	環境溫/濕度	18°C/56%
電纜損失	0.50dB	測試人員	Kuper Hsu
測試電壓	DC 3.3V (透過治具連接筆記型電腦供電)		

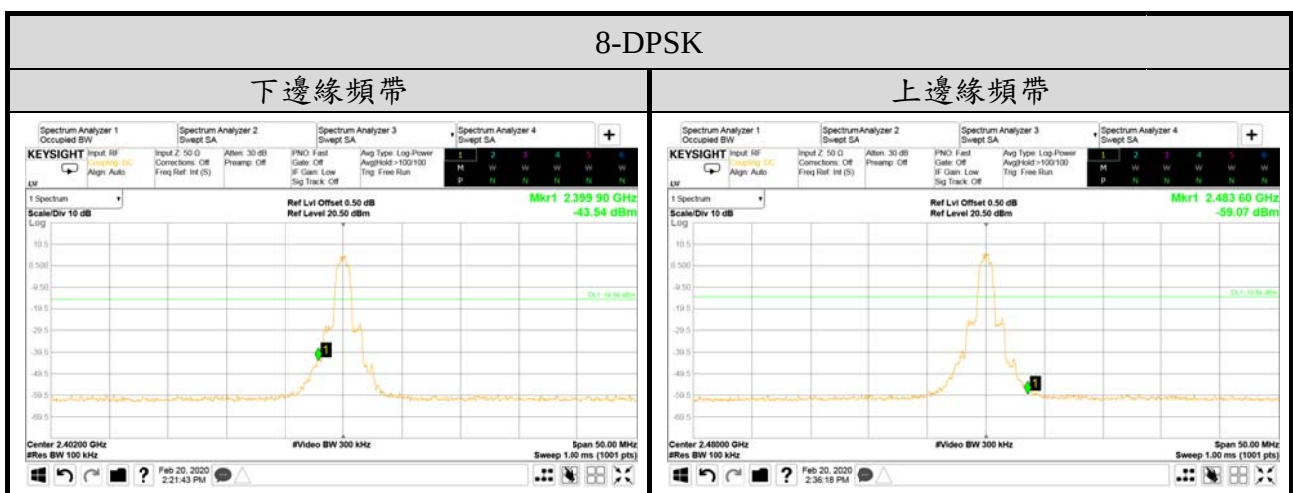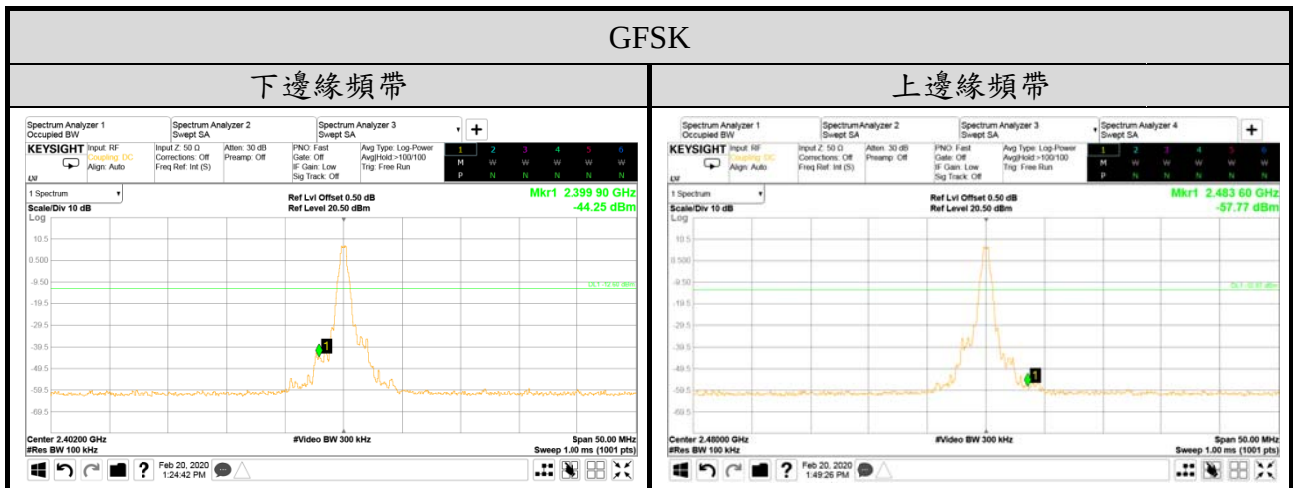

8. 混附發射之 RF 傳導發射之量測

測試日期	2020/02/20	環境溫/濕度	18°C/56%
電纜損失	0.50dB	測試人員	Kuper Hsu
測試電壓	DC 3.3V (透過治具連接筆記型電腦供電)		

