



Appendix A: Frequency Error


Test Result

TestCondition	TestMode	Antenna	Frequency[MHz]	CenterFreq [MHz]	Result[ppm]	Limit[ppm]	Verdict
NTNV	11B	Ant1	2412	2411.971	-12.02322	±50	PASS
NTNV	11B	Ant1	2442	2441.969	-12.69451	±50	PASS
NTNV	11B	Ant1	2472	2471.968	-12.94498	±50	PASS
NTNV	11N40	Ant1	2422	2421.968	-13.21222	±50	PASS
NTNV	11N40	Ant1	2462	2461.967	-13.40374	±50	PASS

Test Graphs

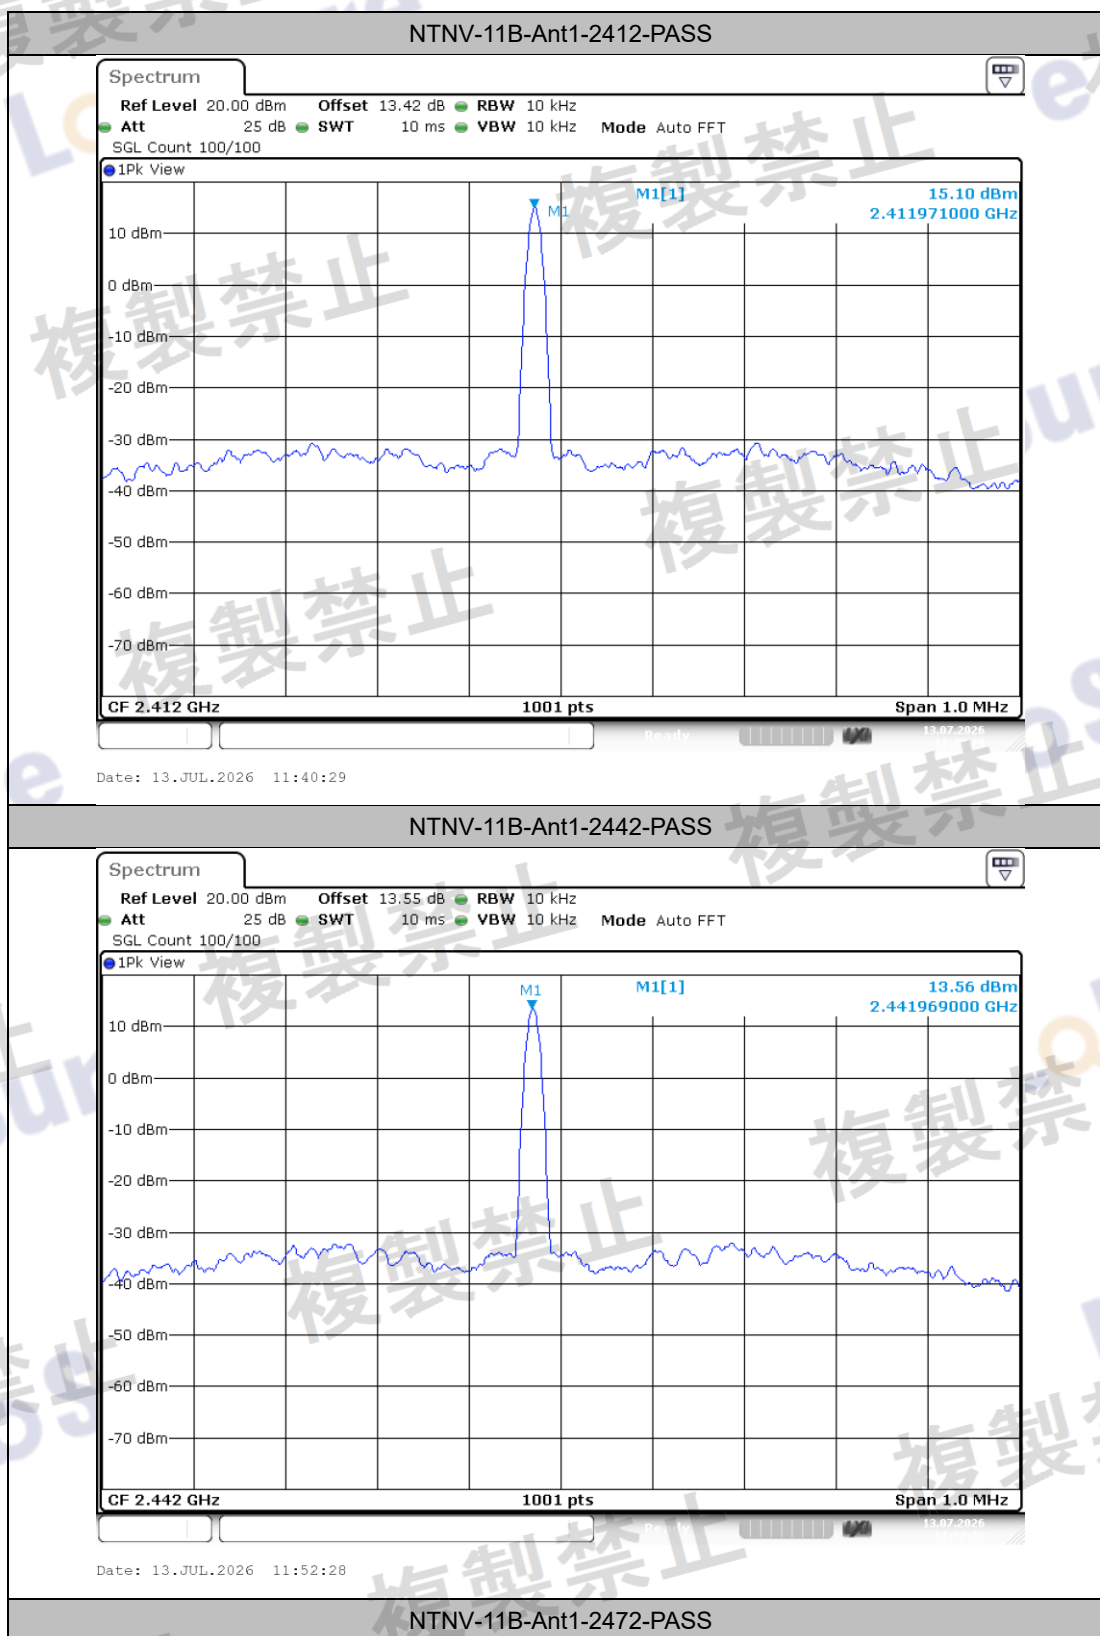

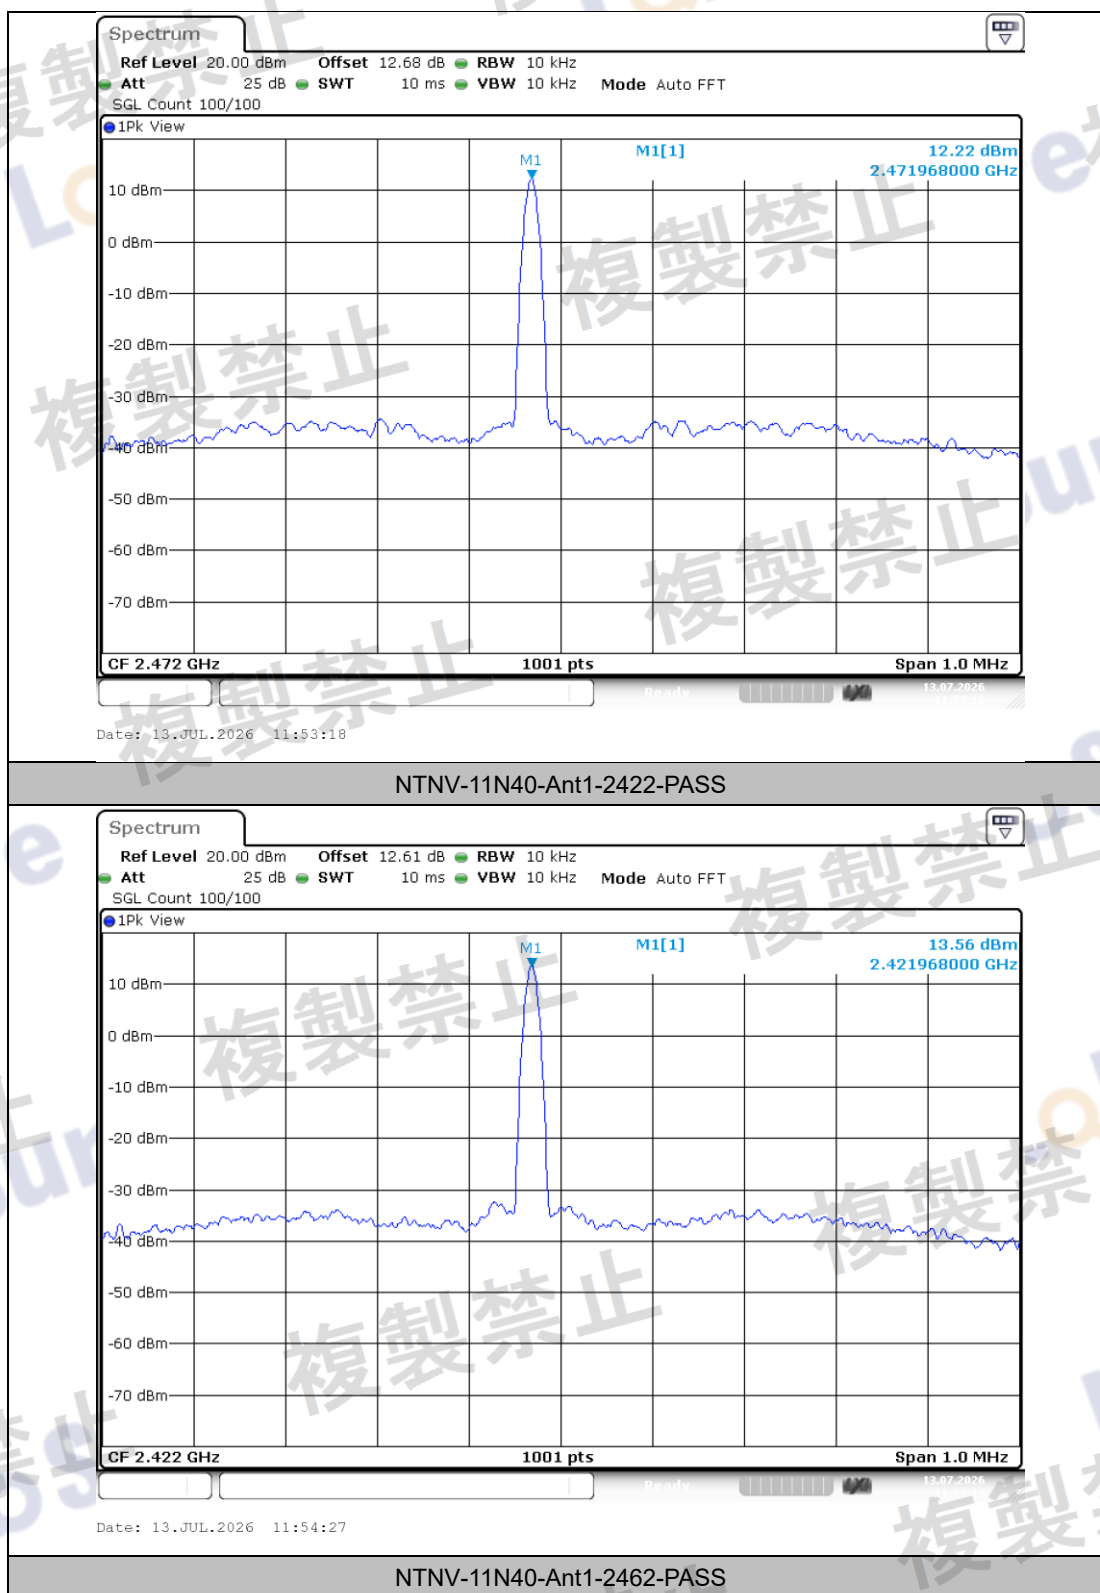

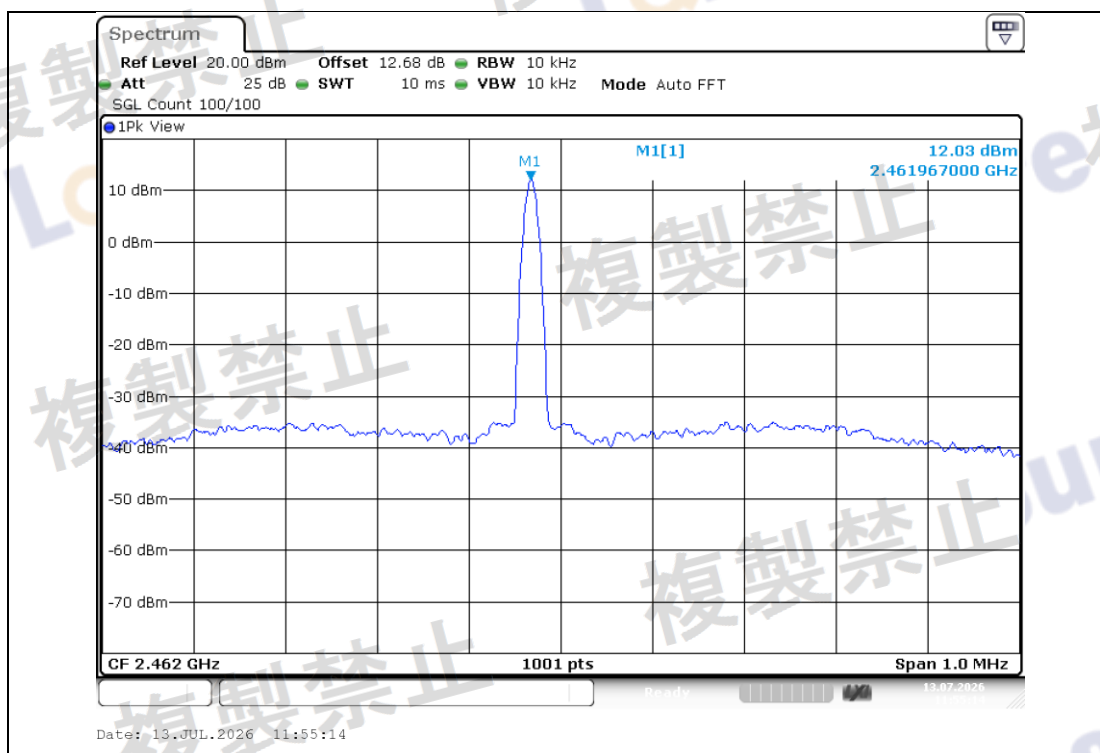

Appendix B: Antenna Power

Test Result


Test Condition	Test Mode	Antenna	Frequency [MHz]	Result(dBm)	Result(mW)	Limit(mW)	Verdict
NTNV	11B	Ant1	2412	7.51	5.6364	≤10	PASS
NTNV	11B	Ant1	2442	6.99	5.0003	≤10	PASS
NTNV	11B	Ant1	2472	5.87	3.8637	≤10	PASS
NTNV	11G	Ant1	2412	3.48	2.2284	≤10	PASS
NTNV	11G	Ant1	2442	2.47	1.7660	≤10	PASS
NTNV	11G	Ant1	2472	2.22	1.6672	≤10	PASS
NTNV	11N20	Ant1	2412	3.27	2.1232	≤10	PASS
NTNV	11N20	Ant1	2442	2.38	1.7298	≤10	PASS
NTNV	11N20	Ant1	2472	2.83	1.9187	≤10	PASS
NTNV	11N40	Ant1	2422	0.53	1.1298	≤5	PASS
NTNV	11N40	Ant1	2442	-0.06	0.9863	≤5	PASS
NTNV	11N40	Ant1	2462	-1.87	0.6501	≤5	PASS


Test Condition	Test Mode	Antenna	Frequency [MHz]	Power (mW)	Rated Power (mW)	Result (%)	Limit (%)	Verdict
NTNV	11B	Ant1	2412	5.6364	6	-6.06	+20	PASS
NTNV	11B	Ant1	2442	5.0003	6	-16.66	+20	PASS
NTNV	11B	Ant1	2472	3.8637	6	-35.61	+20	PASS
NTNV	11G	Ant1	2412	2.2284	3	-25.72	+20	PASS
NTNV	11G	Ant1	2442	1.7660	3	-41.13	+20	PASS
NTNV	11G	Ant1	2472	1.6672	3	-44.43	+20	PASS
NTNV	11N20	Ant1	2412	2.1232	3	-29.23	+20	PASS
NTNV	11N20	Ant1	2442	1.7298	3	-42.34	+20	PASS
NTNV	11N20	Ant1	2472	1.9187	3	-36.04	+20	PASS
NTNV	11N40	Ant1	2422	1.1298	2	-43.51	+20	PASS
NTNV	11N40	Ant1	2442	0.9863	2	-50.69	+20	PASS
NTNV	11N40	Ant1	2462	0.6501	2	-67.50	+20	PASS


Test Condition	Test Mode	Antenna	Frequency [MHz]	Result(dBm)	EIRP (dBm)	Limit (dBm)	Verdict
NTNV	11B	Ant1	2412	7.51	10.11	≤12.14	PASS
NTNV	11B	Ant1	2442	6.99	9.59	≤12.14	PASS
NTNV	11B	Ant1	2472	5.87	8.47	≤12.14	PASS
NTNV	11G	Ant1	2412	3.48	6.08	≤12.14	PASS
NTNV	11G	Ant1	2442	2.47	5.07	≤12.14	PASS
NTNV	11G	Ant1	2472	2.22	4.82	≤12.14	PASS


NTNV	11N20	Ant1	2412	3.27	5.87	≤ 12.14	PASS
NTNV	11N20	Ant1	2442	2.38	4.98	≤ 12.14	PASS
NTNV	11N20	Ant1	2472	2.83	5.43	≤ 12.14	PASS
NTNV	11N40	Ant1	2422	0.53	3.13	≤ 9.13	PASS
NTNV	11N40	Ant1	2442	-0.06	2.54	≤ 9.13	PASS
NTNV	11N40	Ant1	2462	-1.87	0.73	≤ 9.13	PASS


Test Graphs

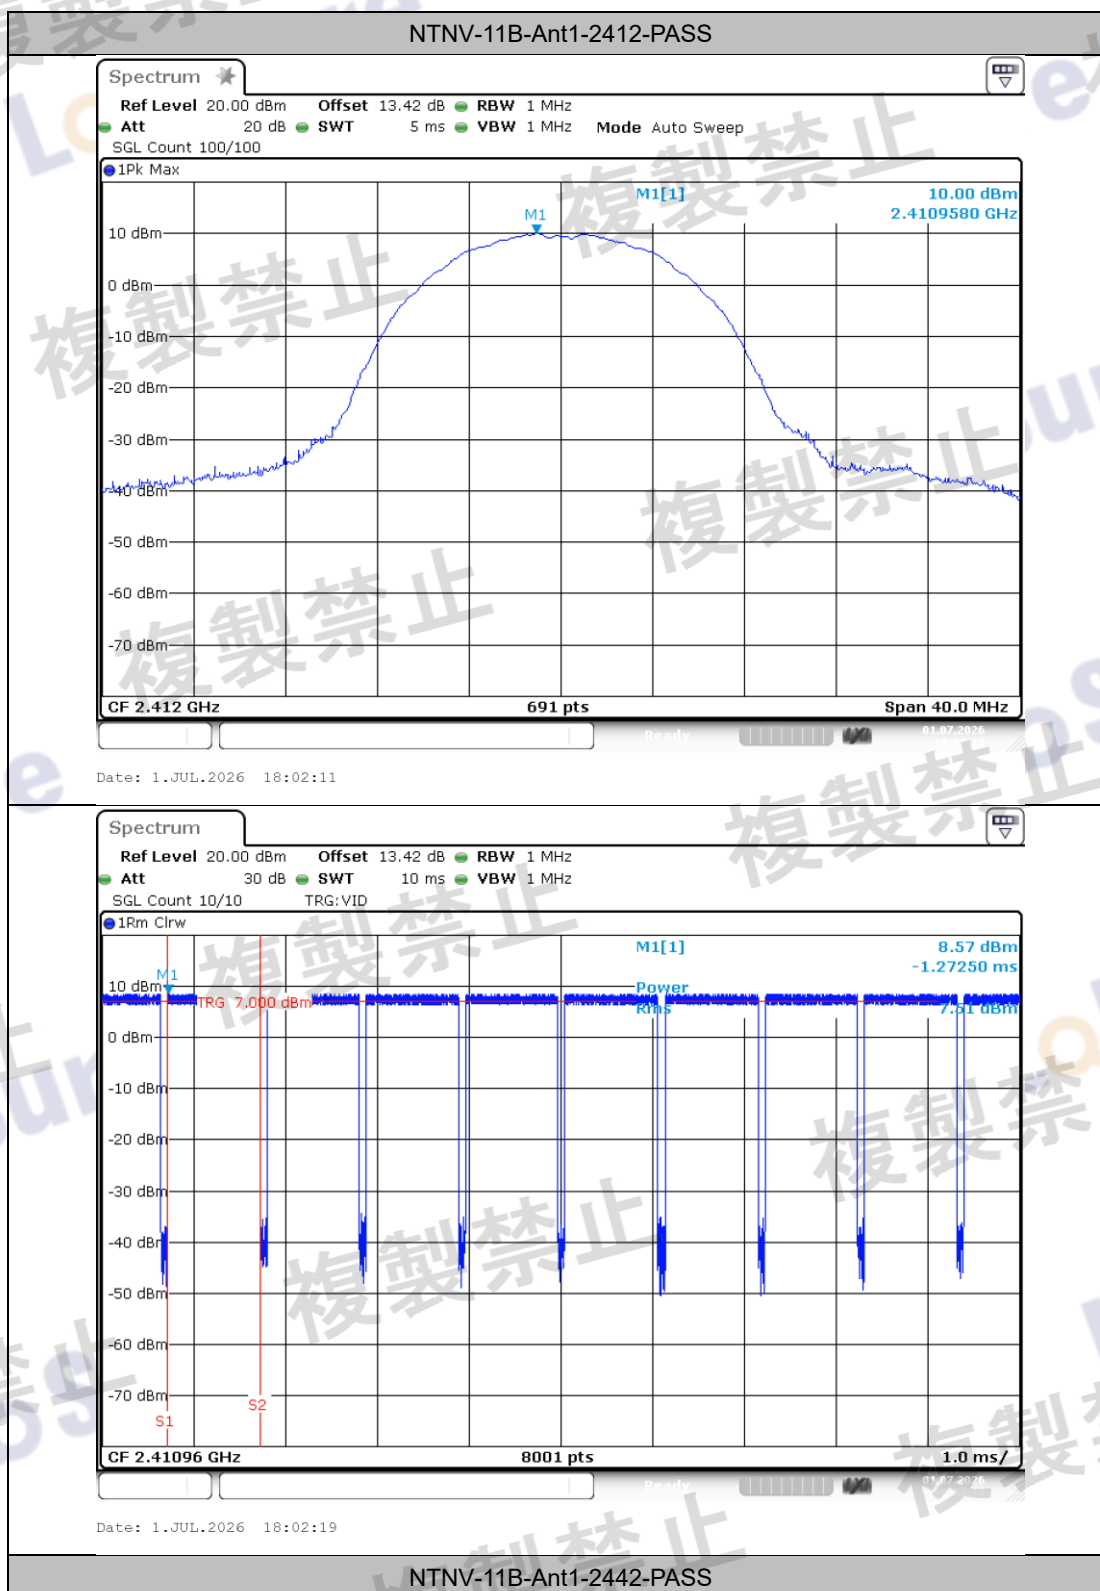


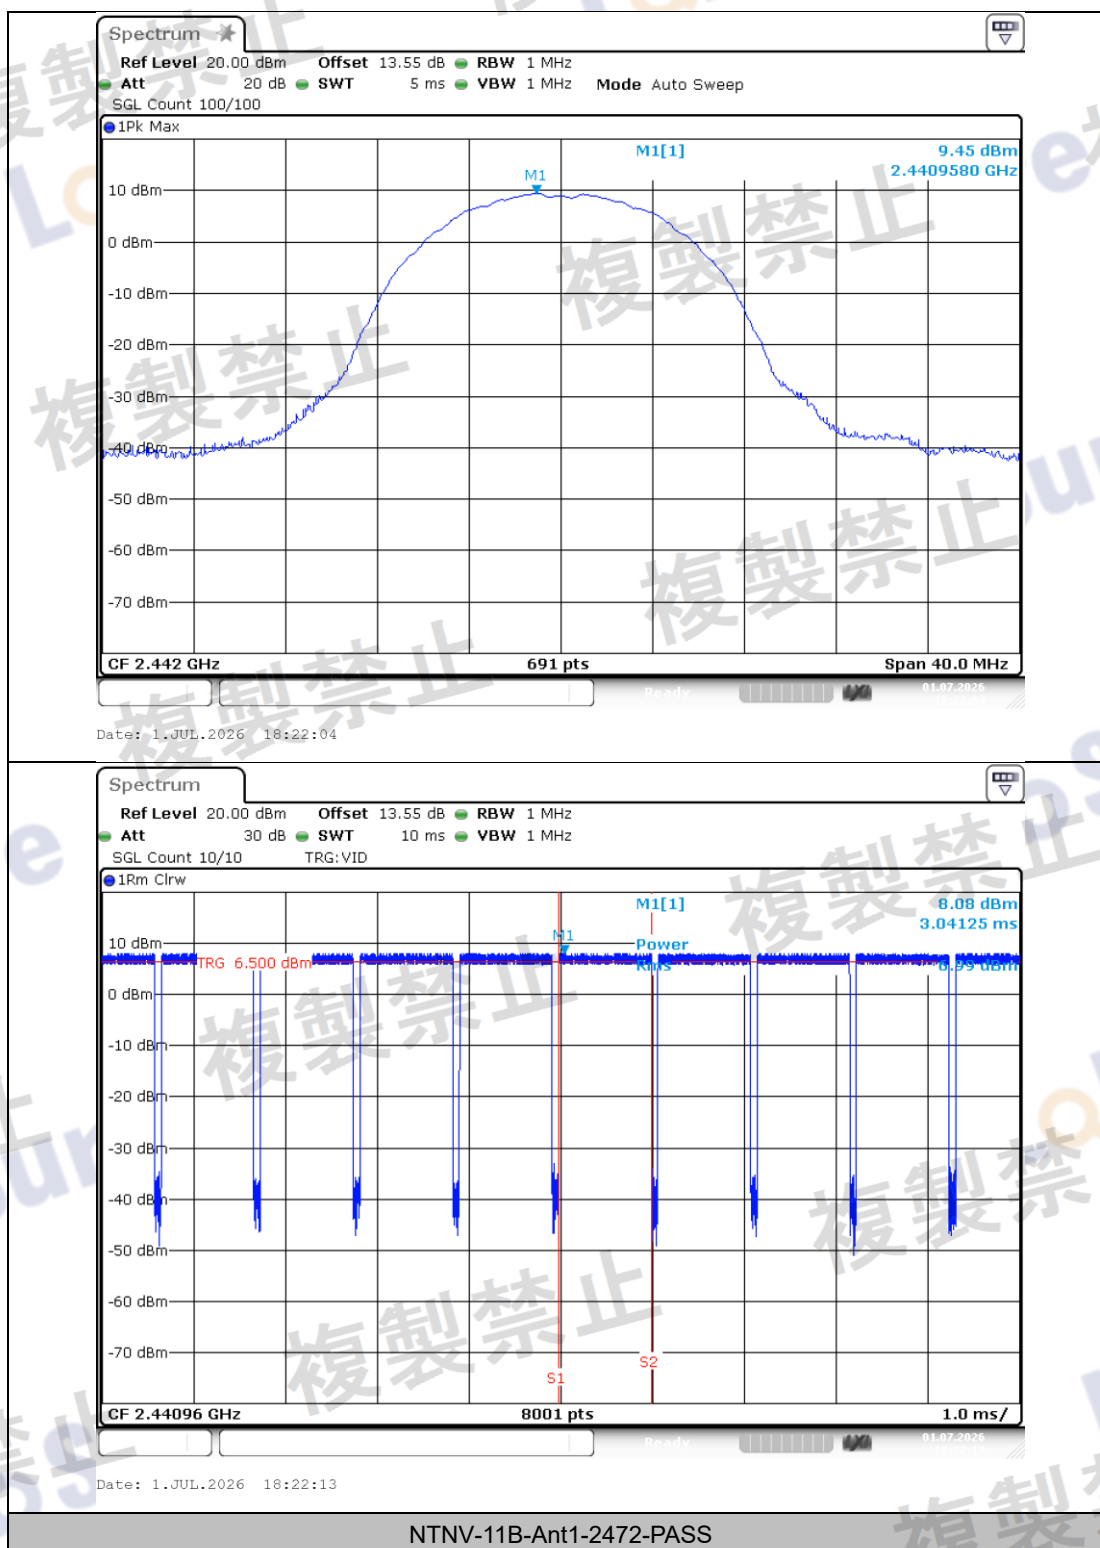


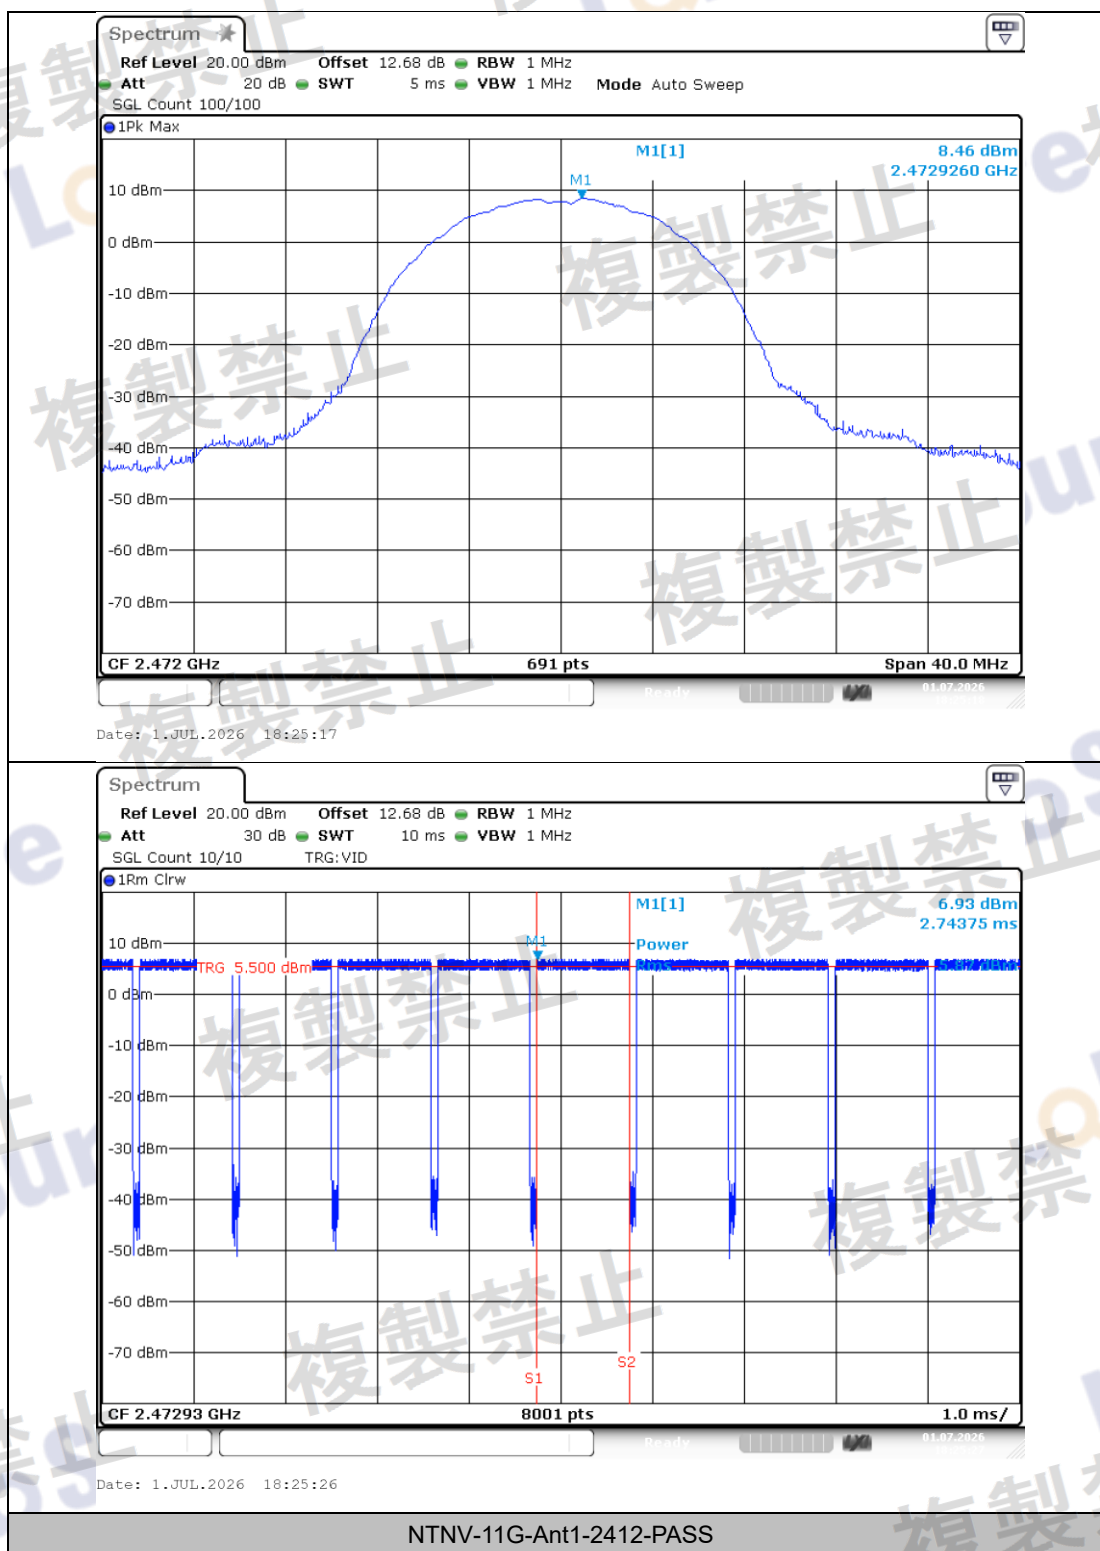


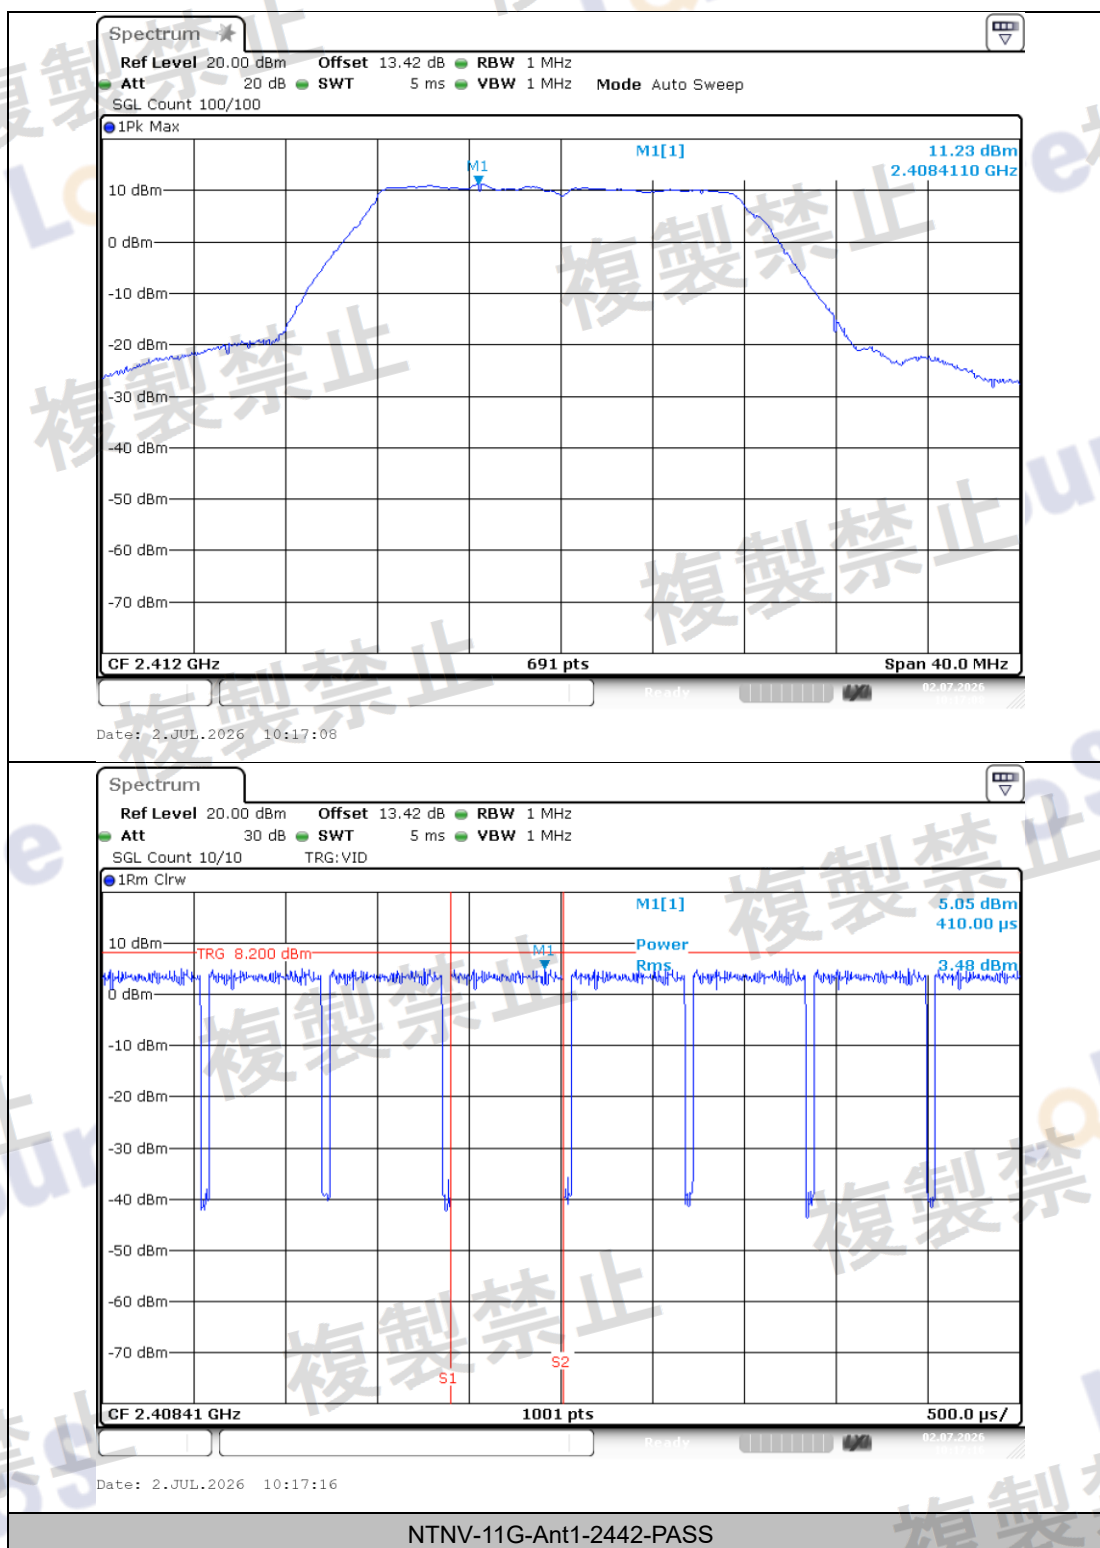


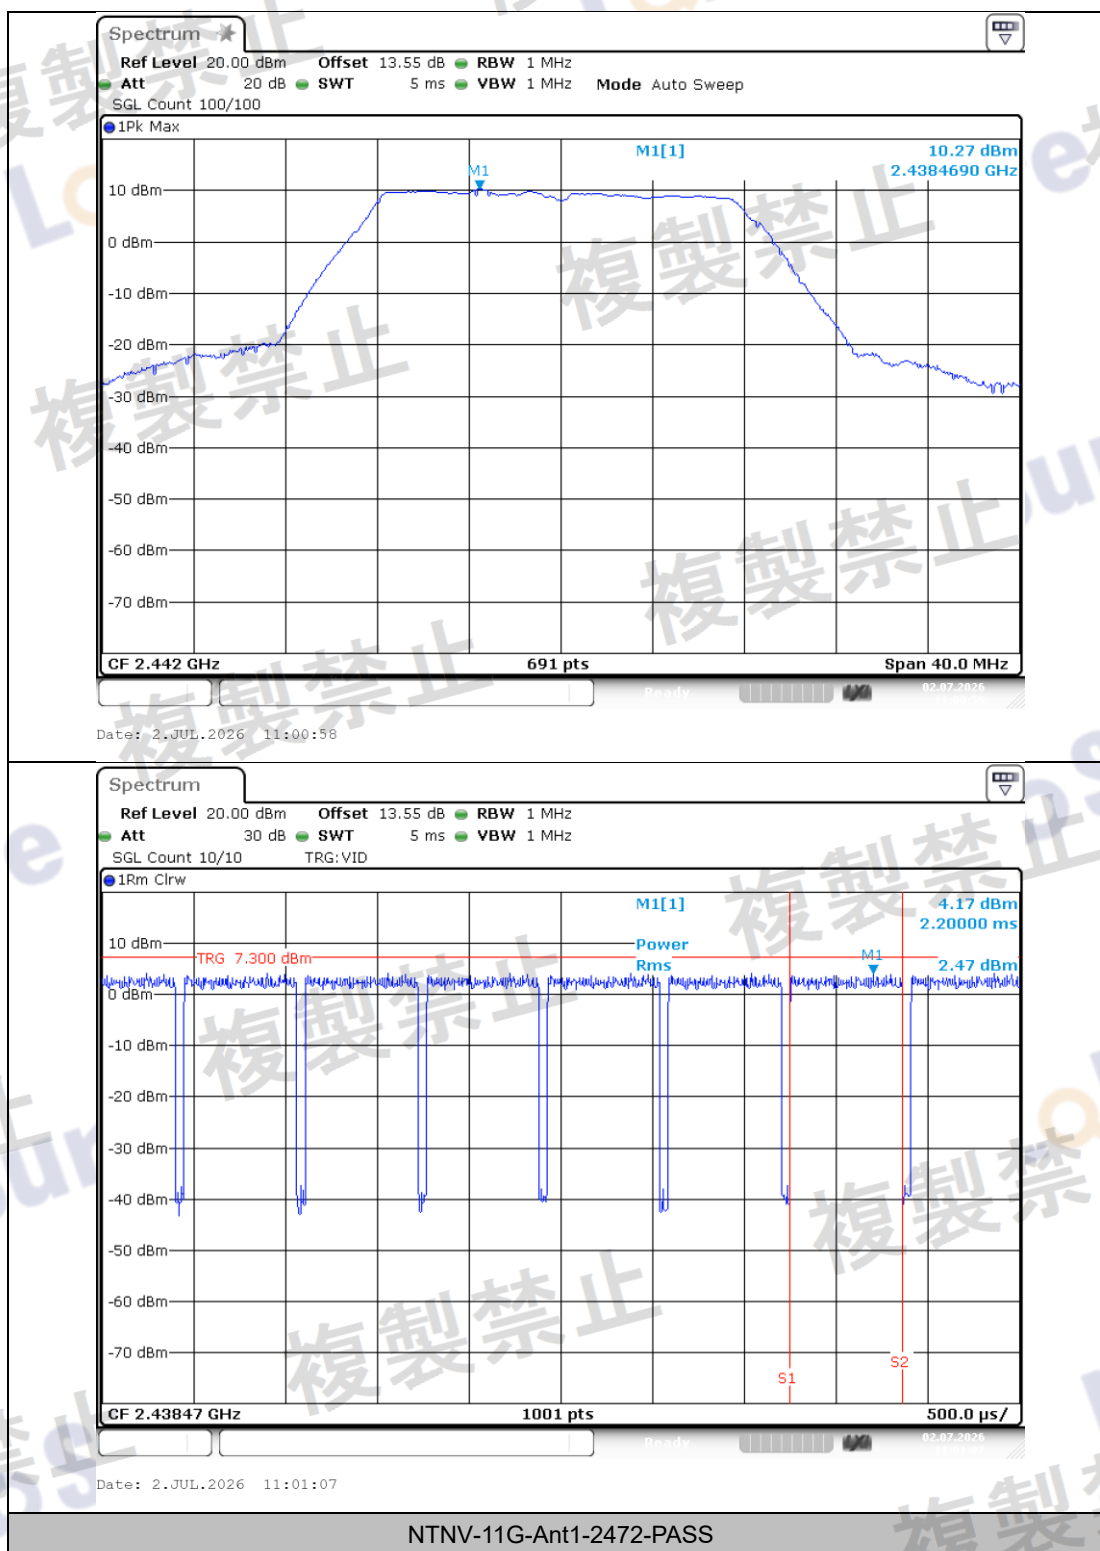


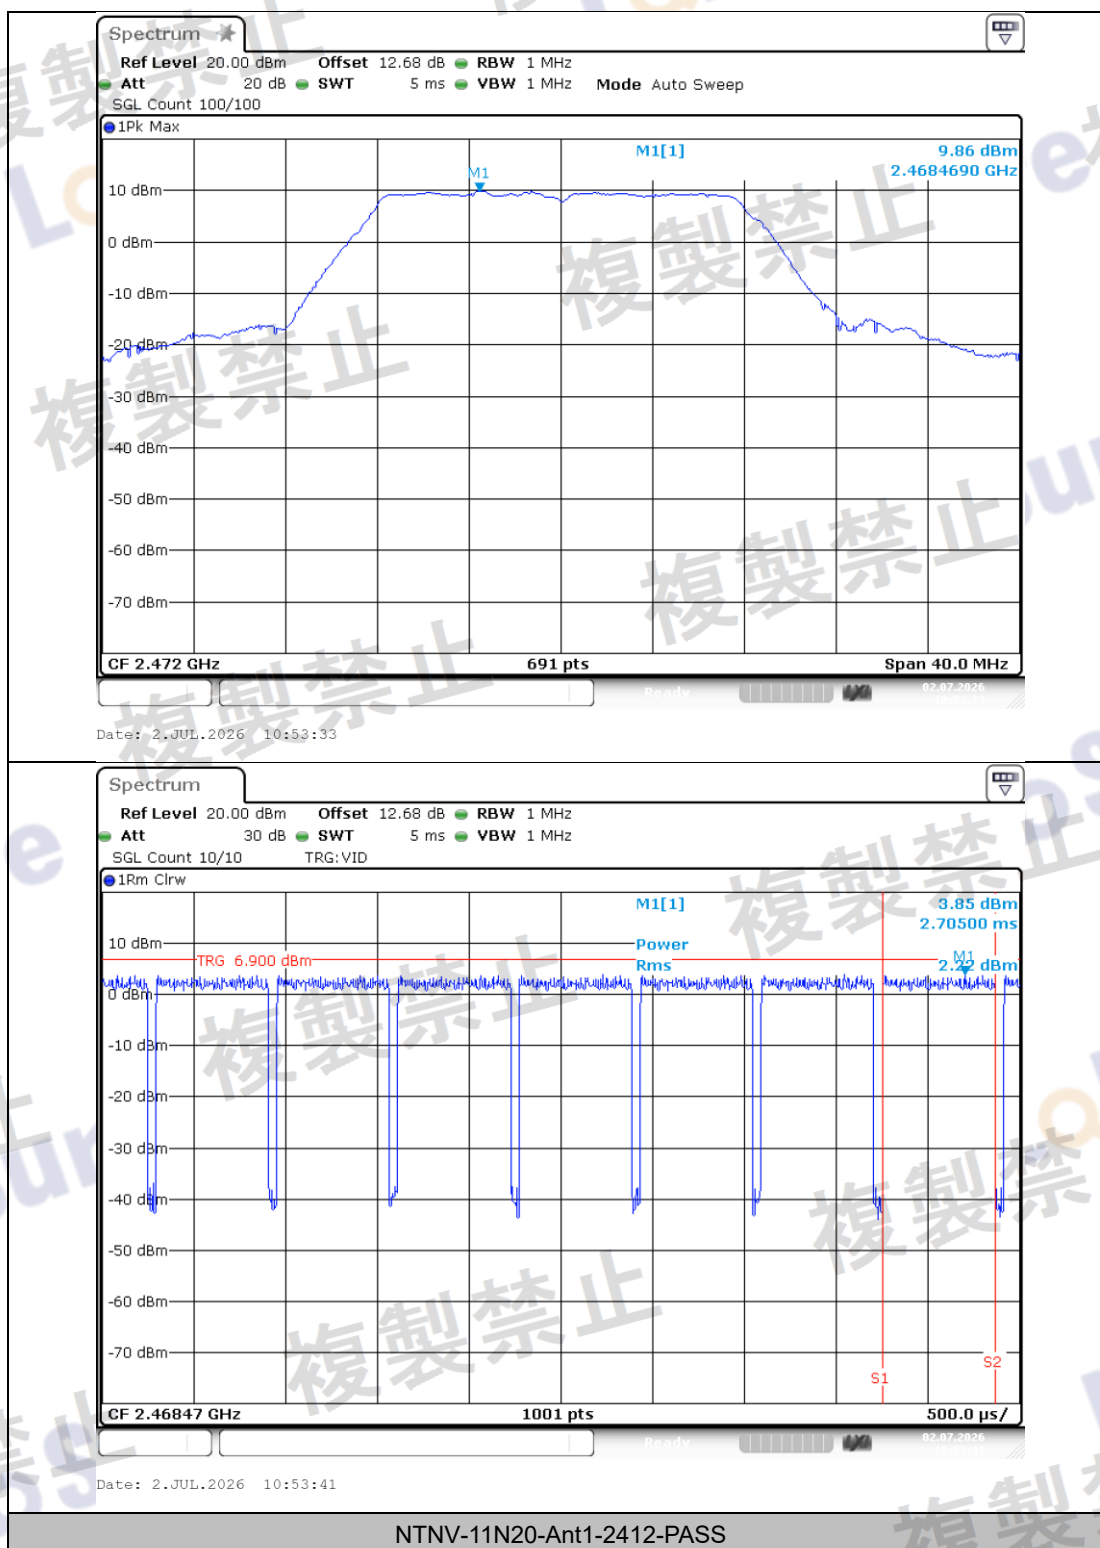


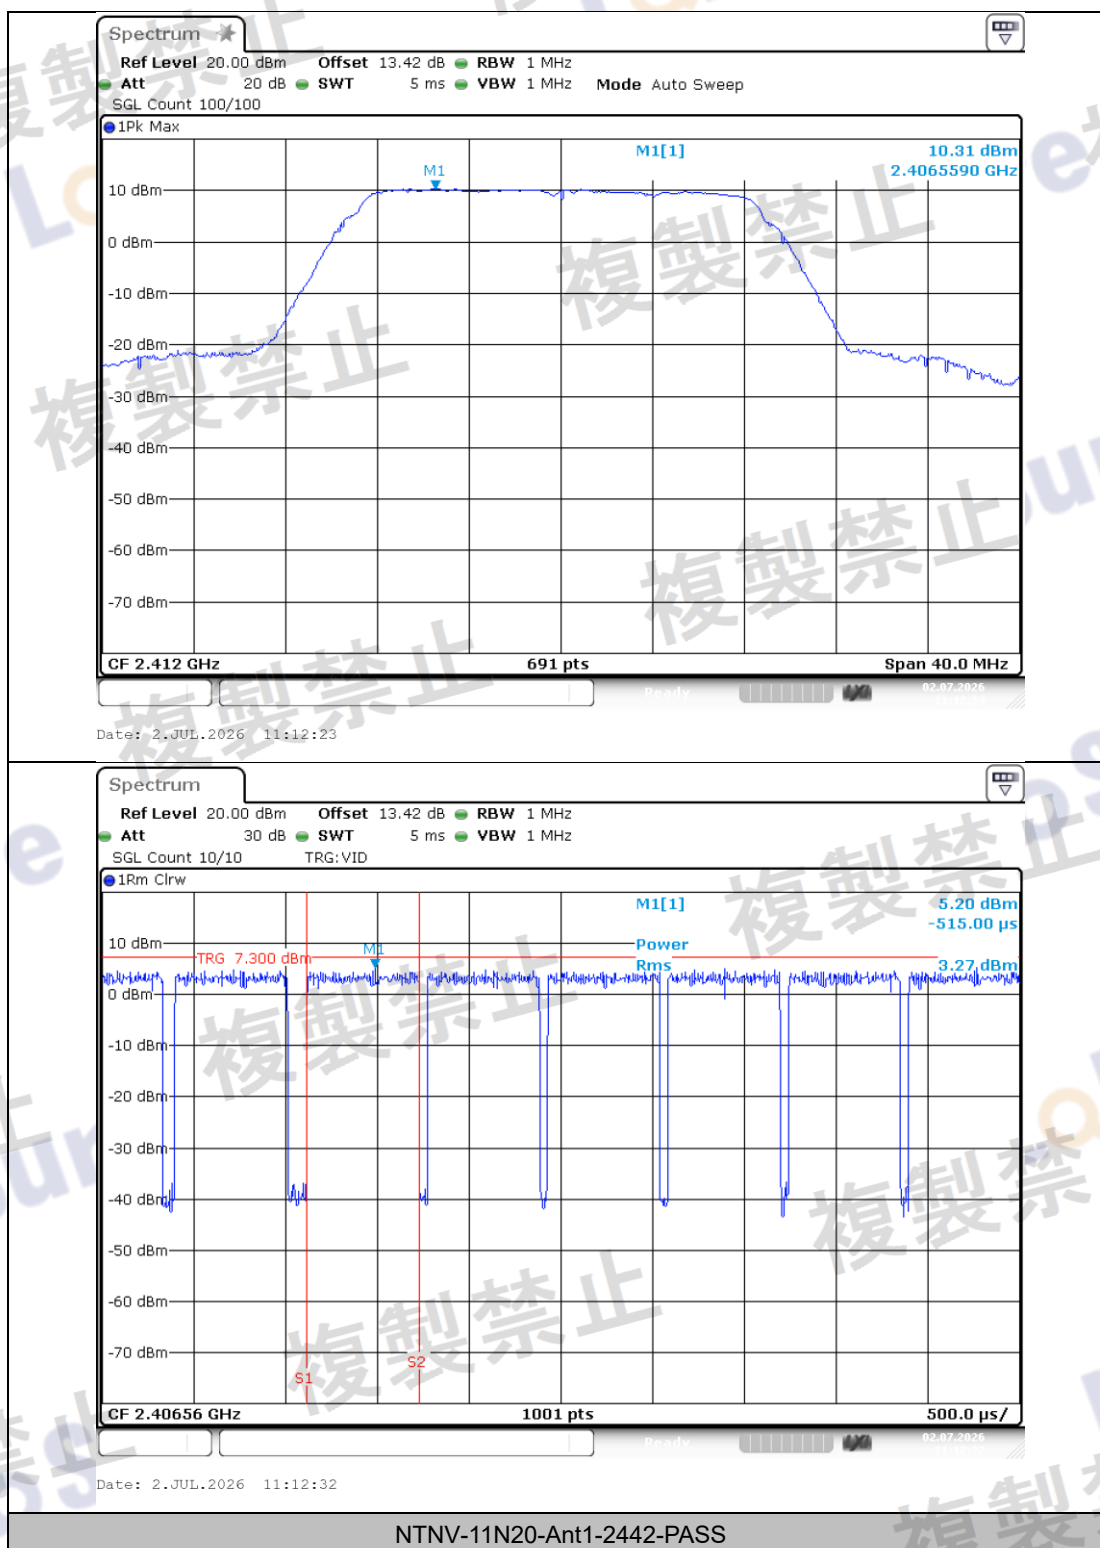


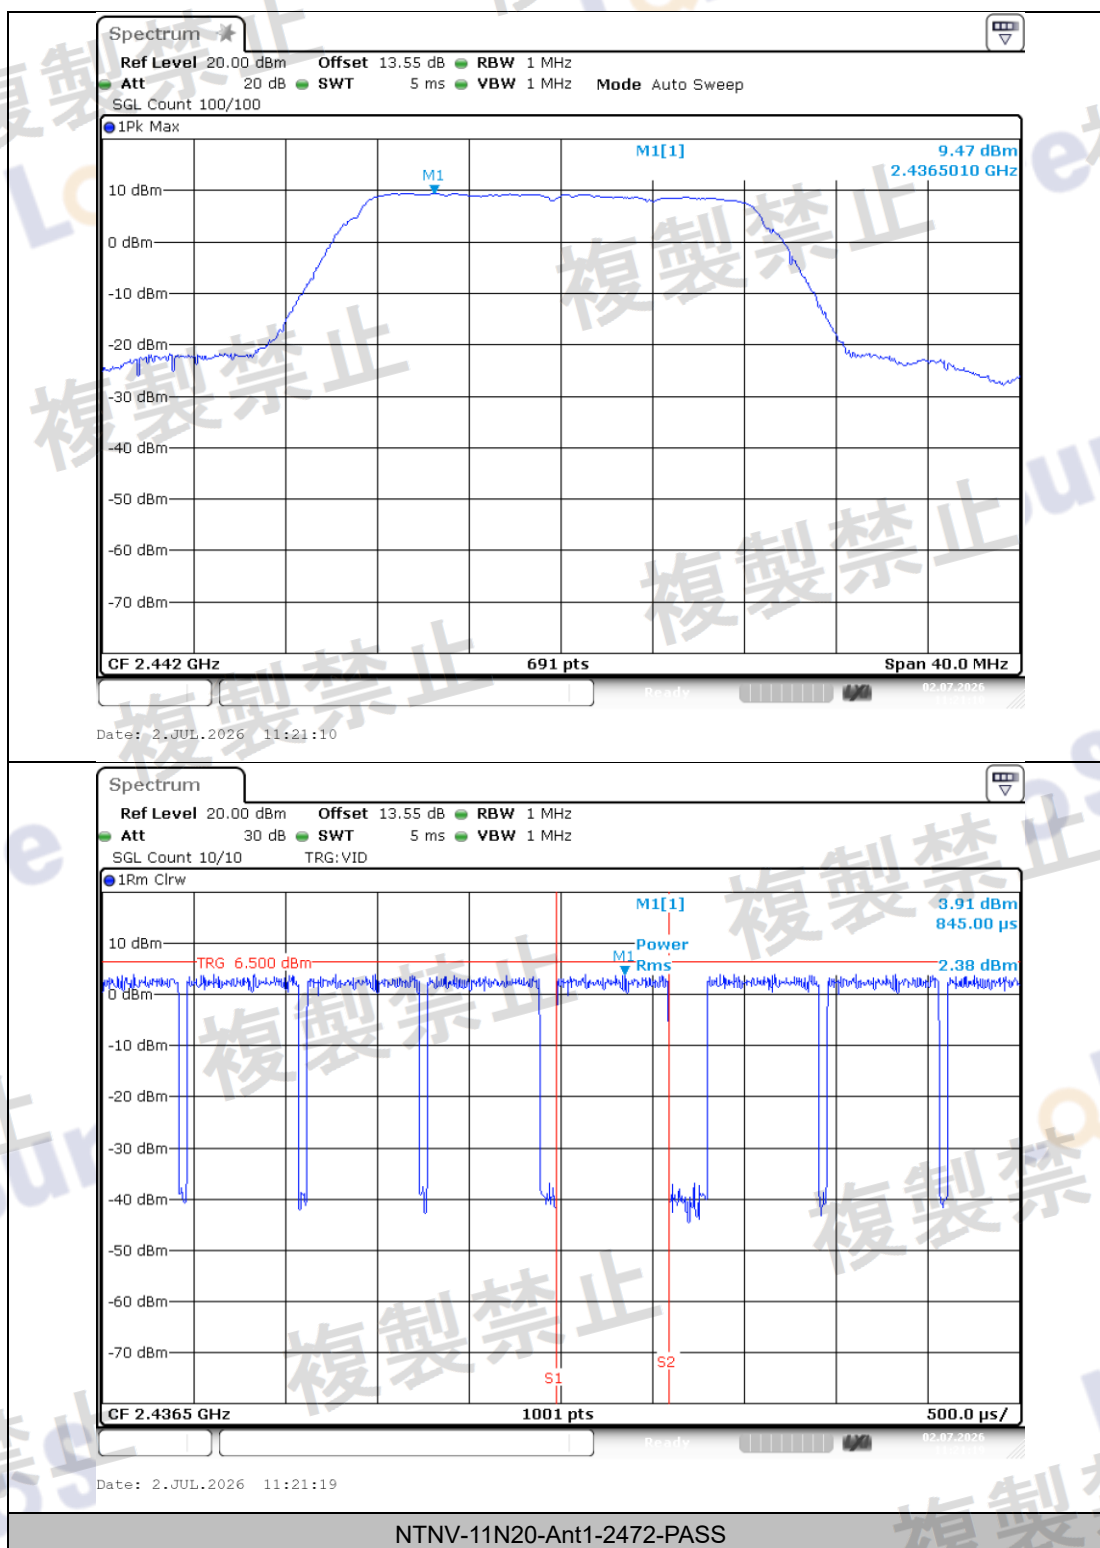

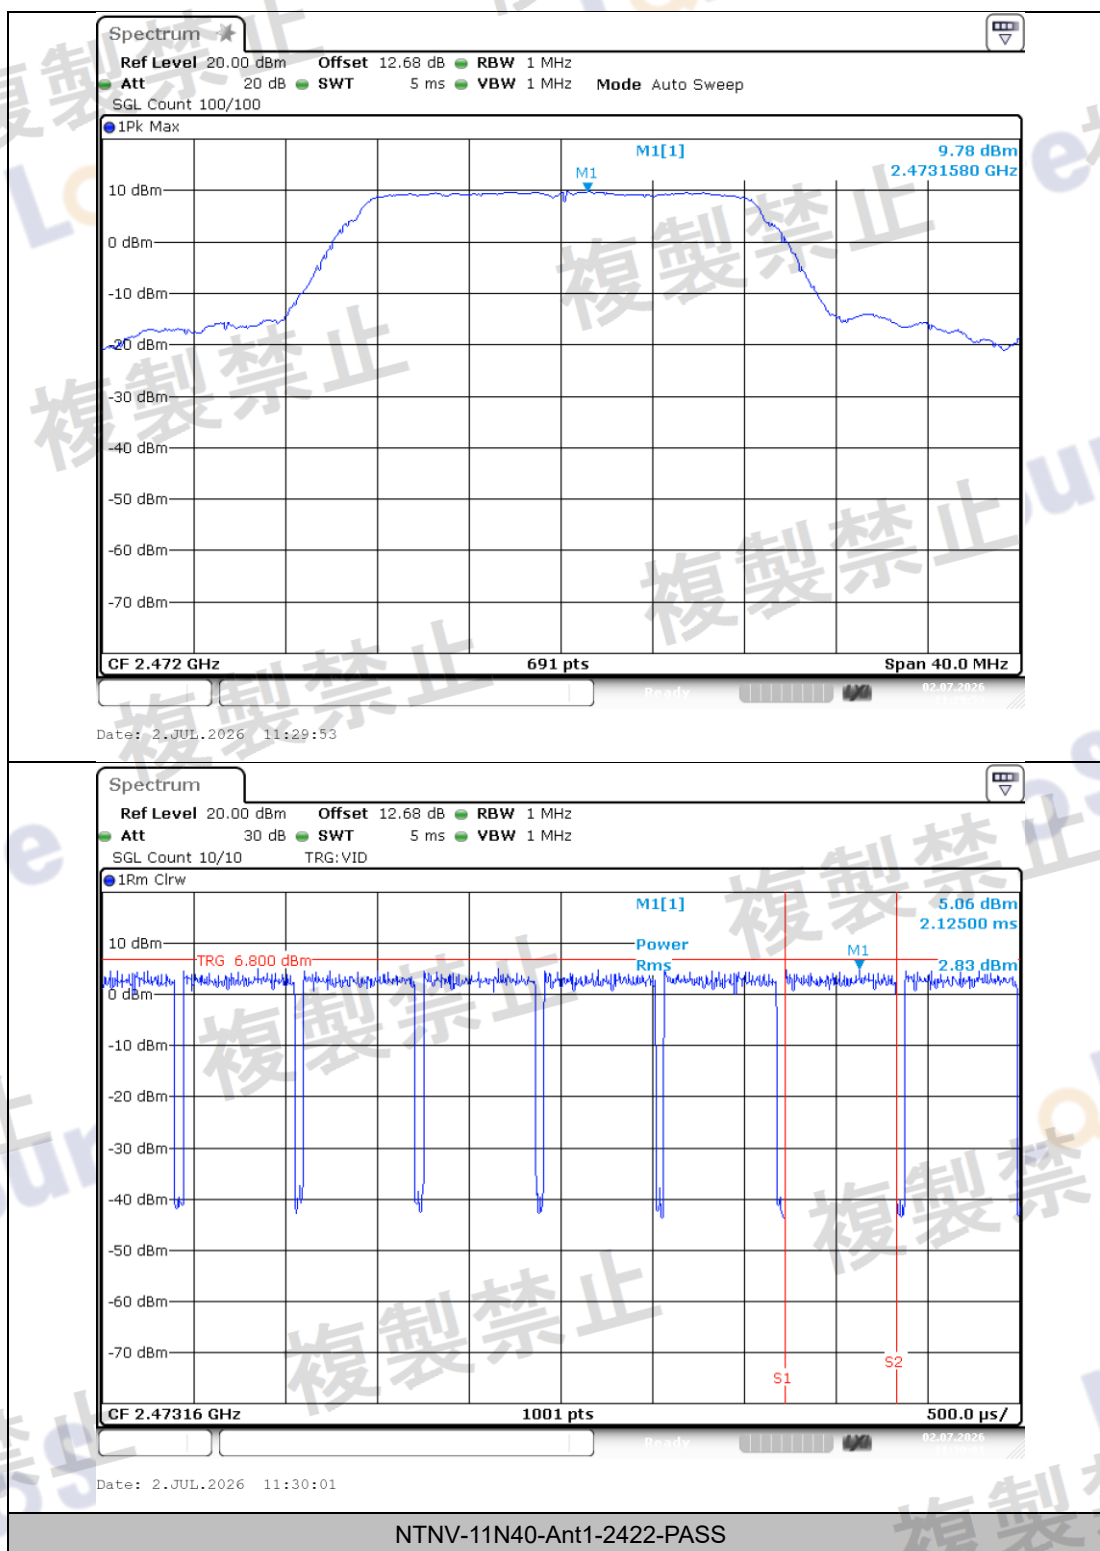

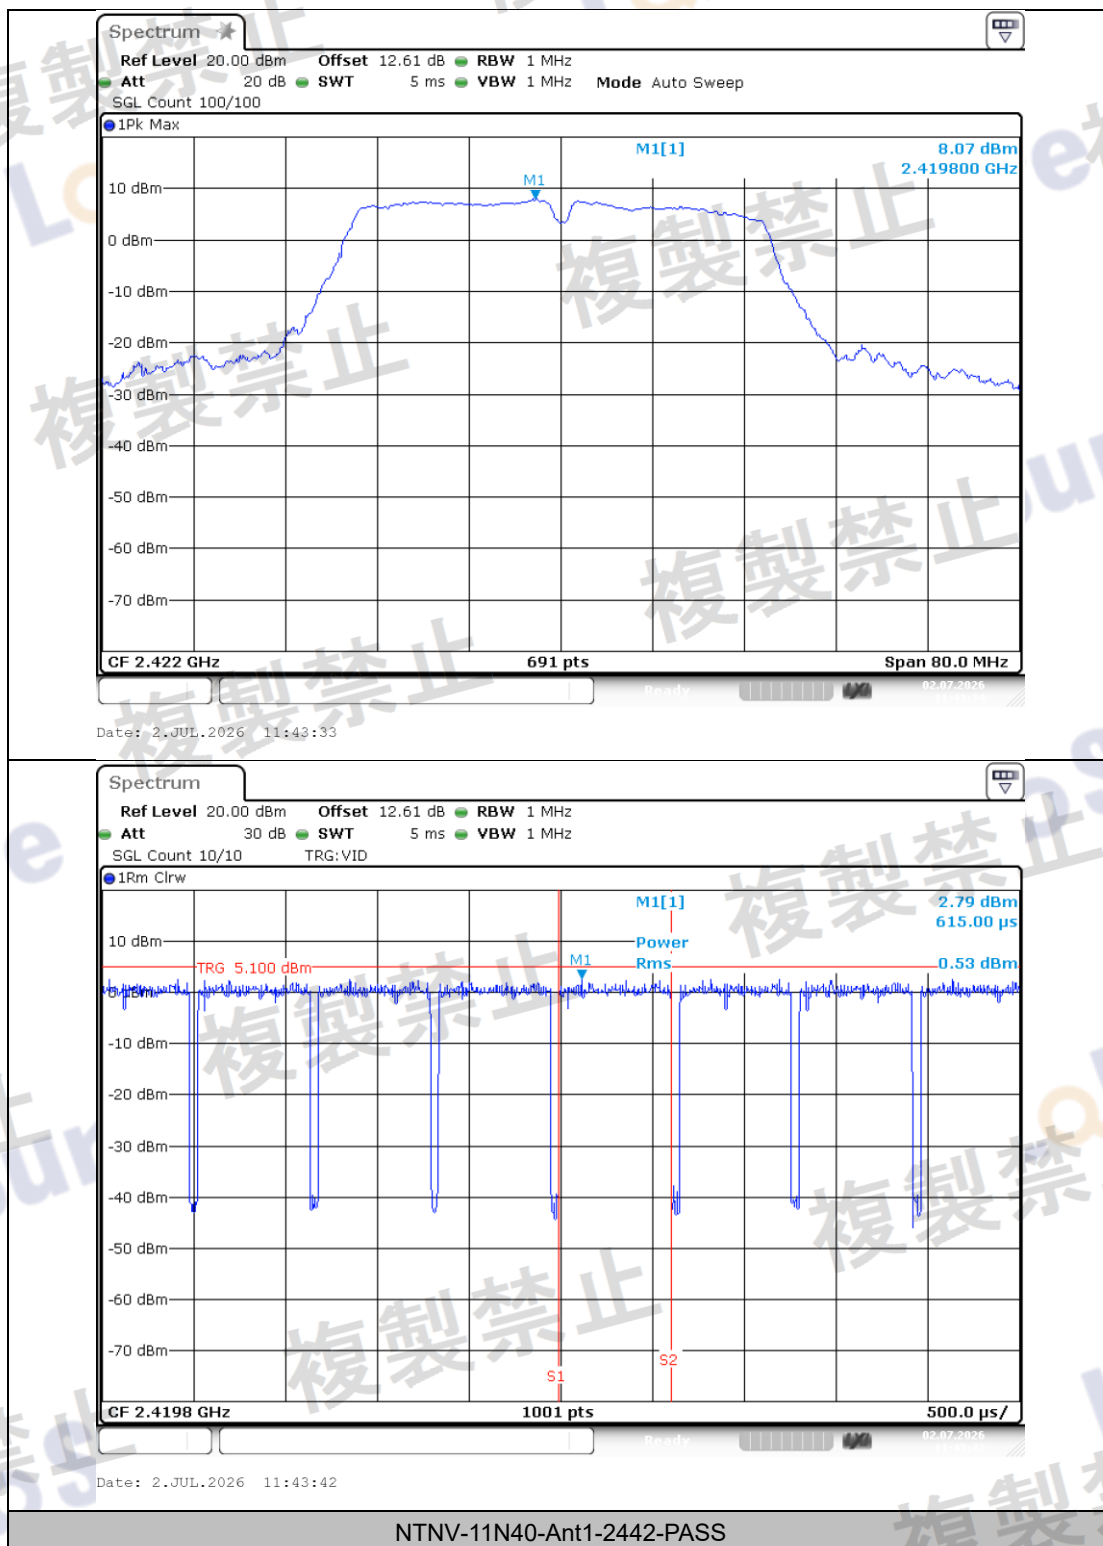

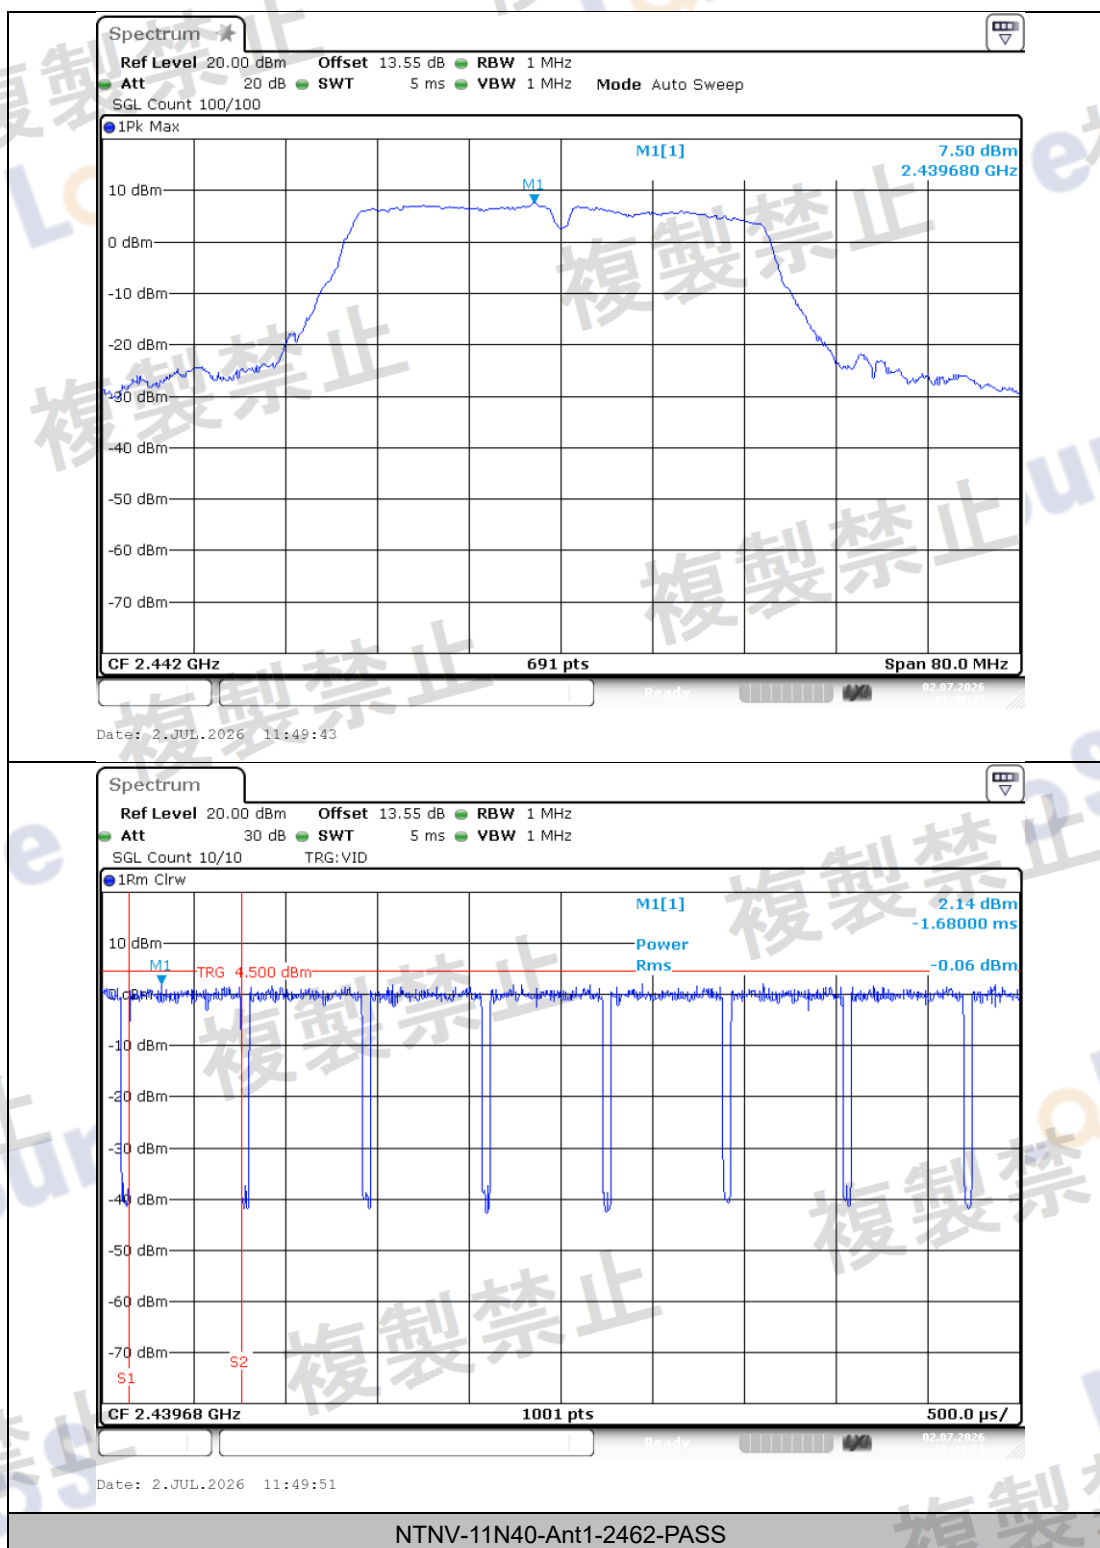

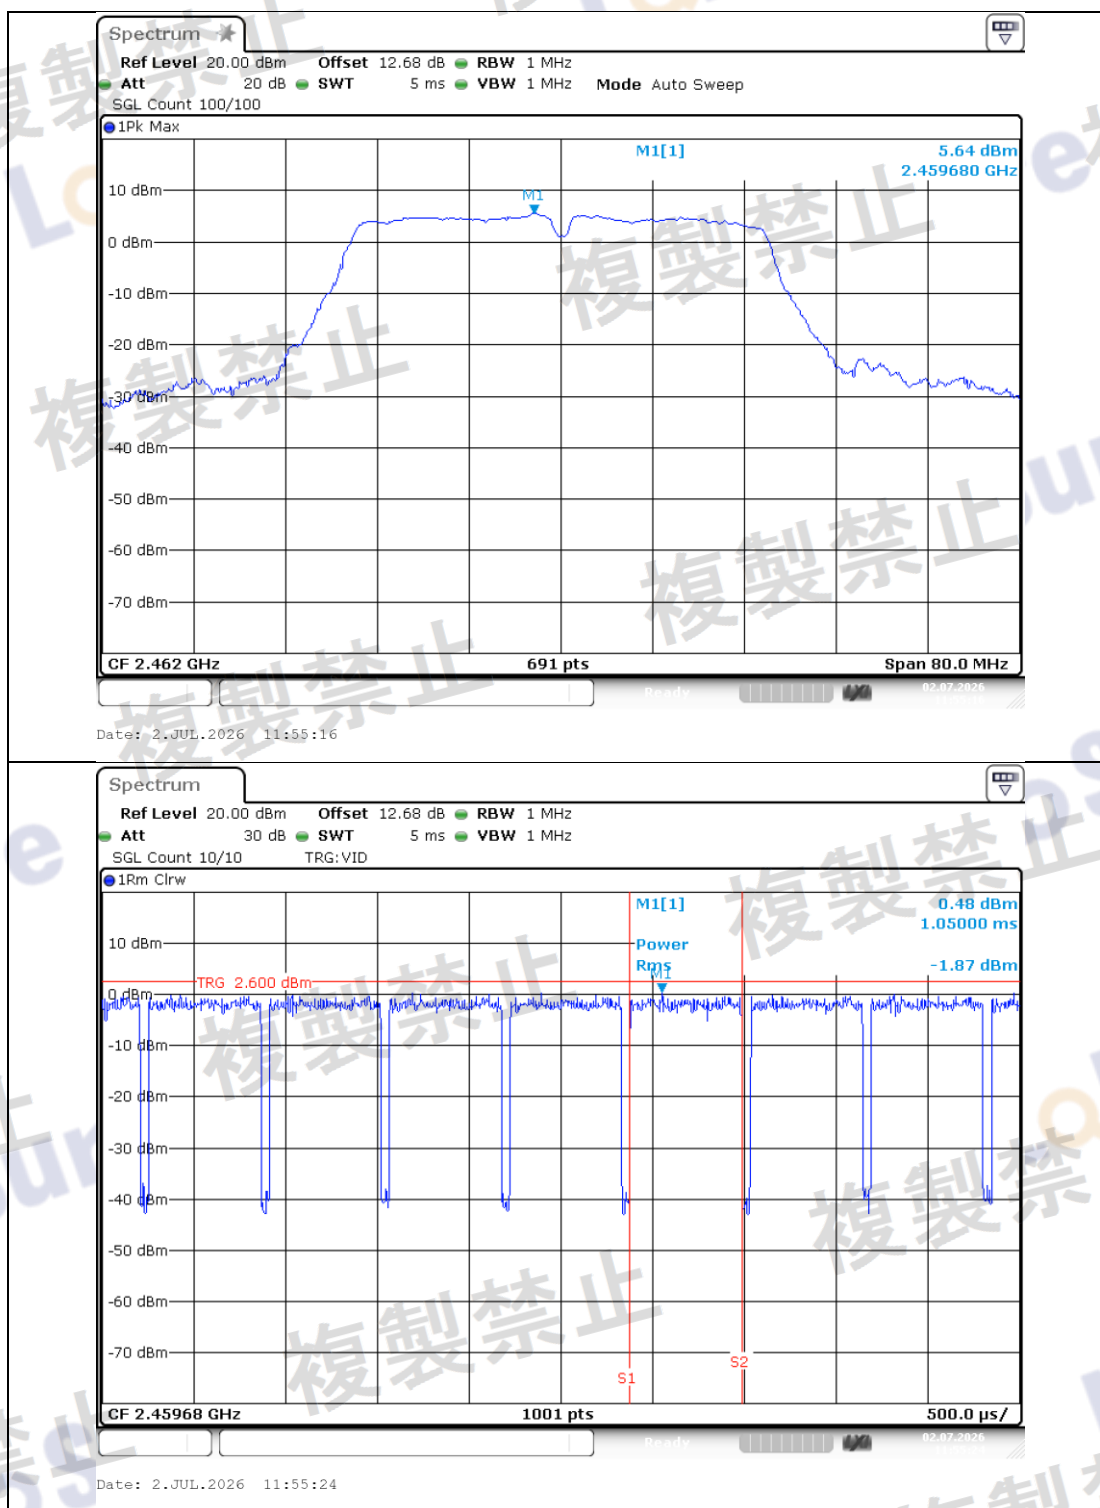



Appendix C: Occupied Bandwidth


Test Result


TestCondition	TestMode	Antenna	Frequency[MHz]	Result [MHz]	Limit [MHz]	Verdict
NTNV	11B	Ant1	2412	13.127	≤26	PASS
NTNV	11B	Ant1	2442	13.067	≤26	PASS
NTNV	11B	Ant1	2472	13.067	≤26	PASS
NTNV	11G	Ant1	2412	17.143	≤26	PASS
NTNV	11G	Ant1	2442	17.143	≤26	PASS
NTNV	11G	Ant1	2472	17.323	≤26	PASS
NTNV	11N20	Ant1	2412	18.162	≤26	PASS
NTNV	11N20	Ant1	2442	18.162	≤26	PASS
NTNV	11N20	Ant1	2472	18.282	≤26	PASS
NTNV	11N40	Ant1	2422	36.204	26-40	PASS
NTNV	11N40	Ant1	2442	36.324	26-40	PASS
NTNV	11N40	Ant1	2462	36.324	26-40	PASS


Test Graphs

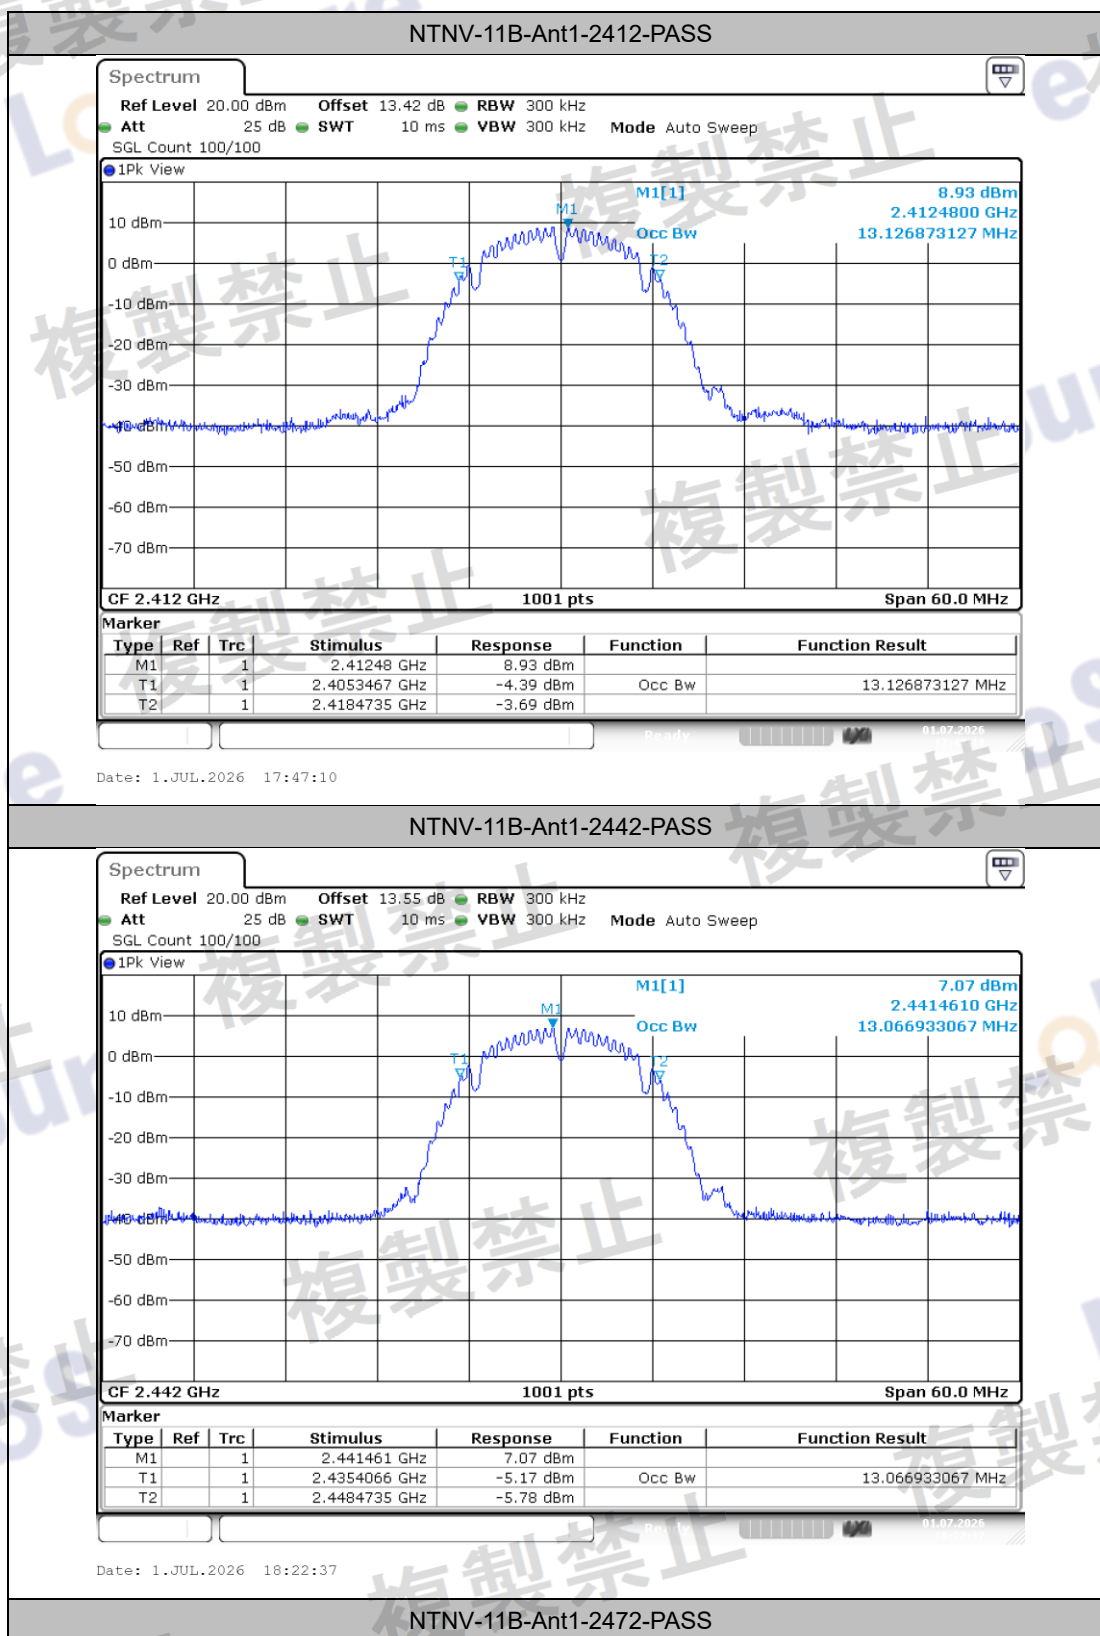


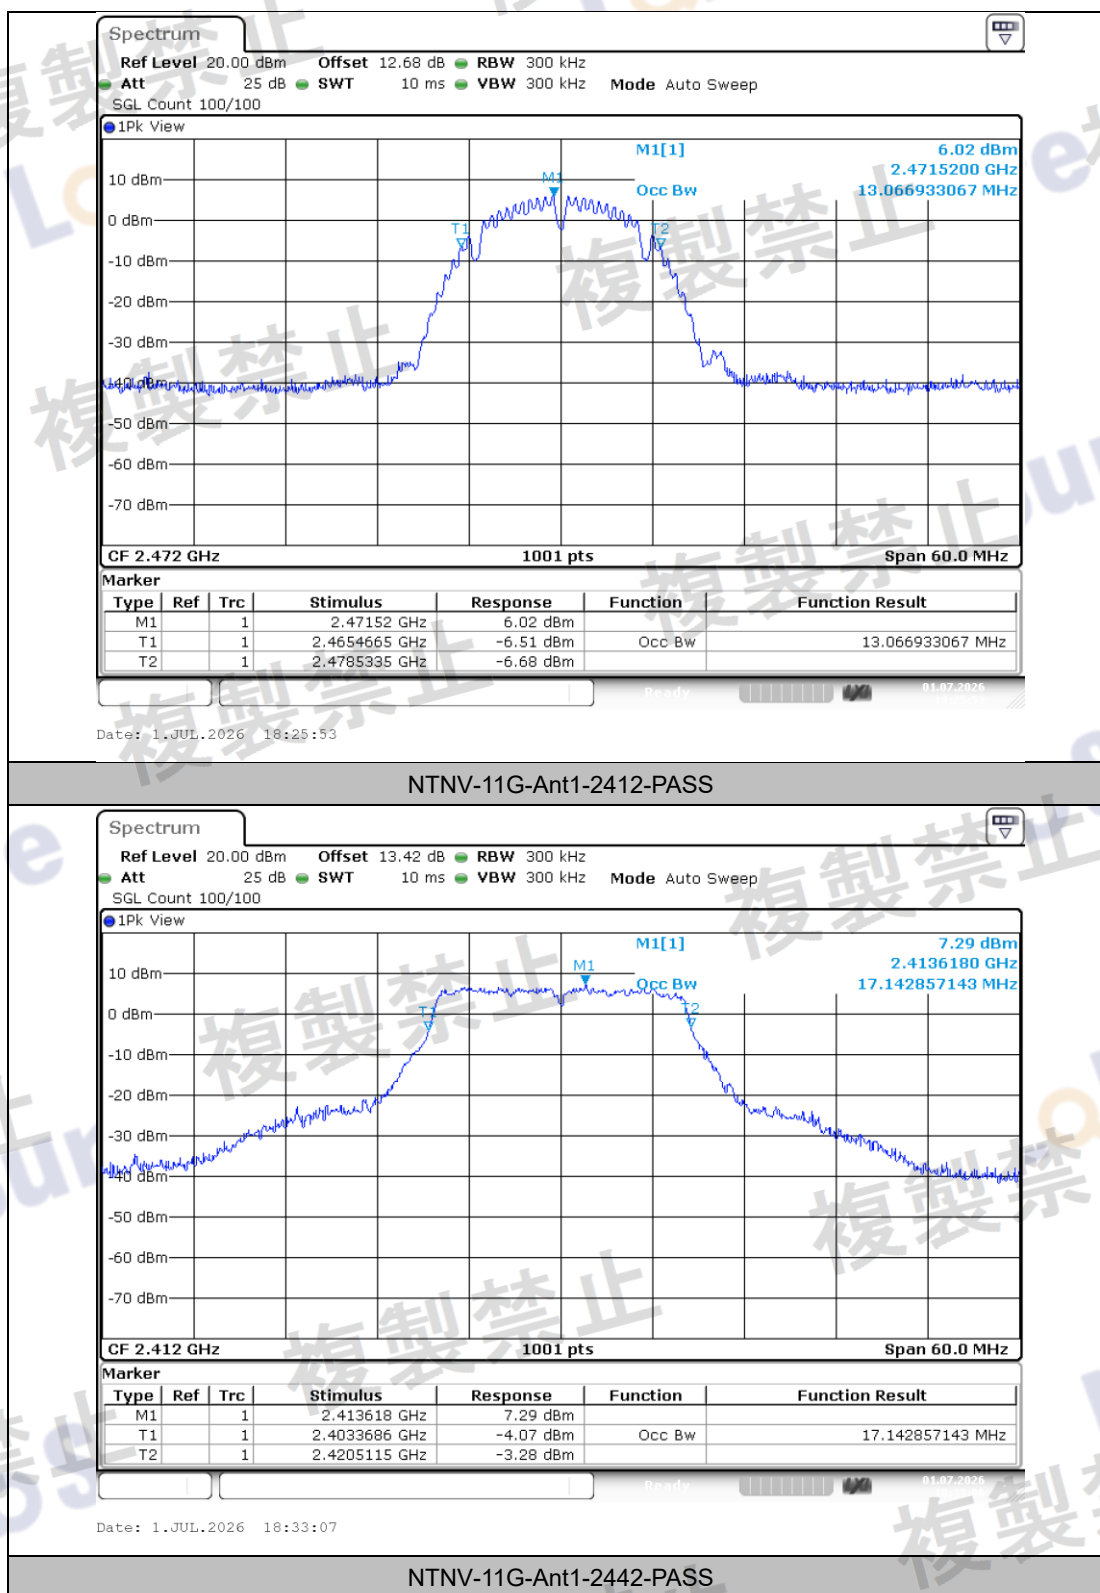

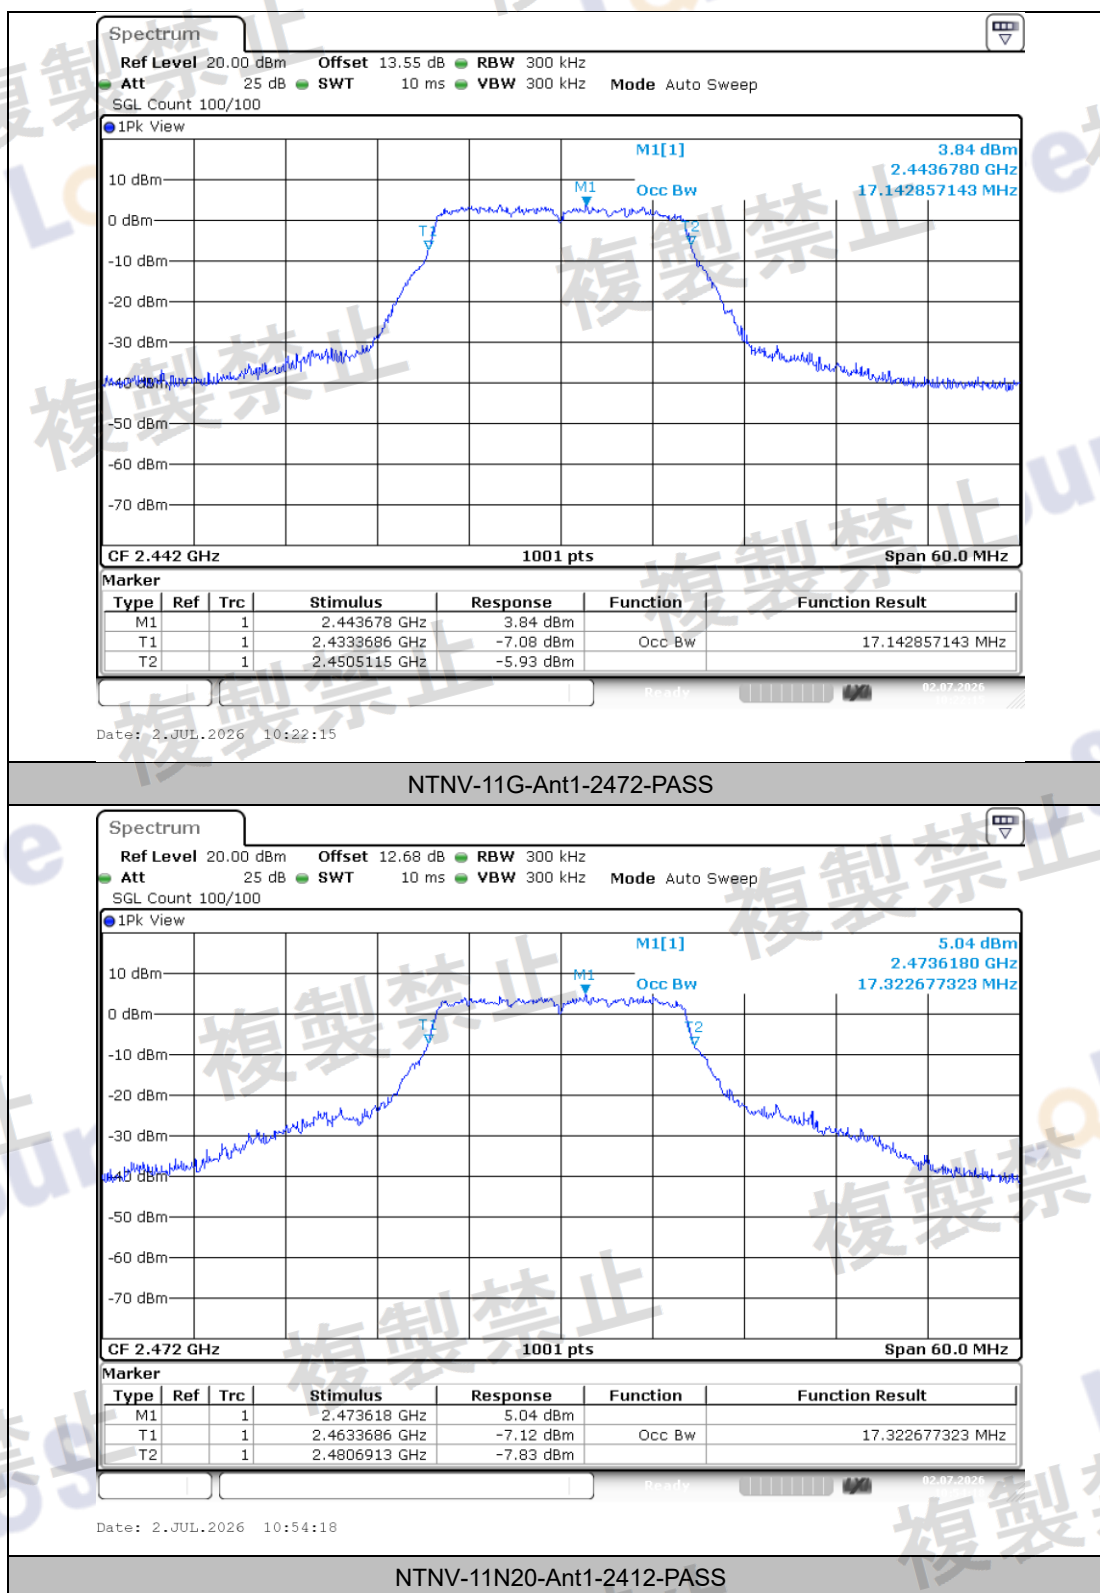


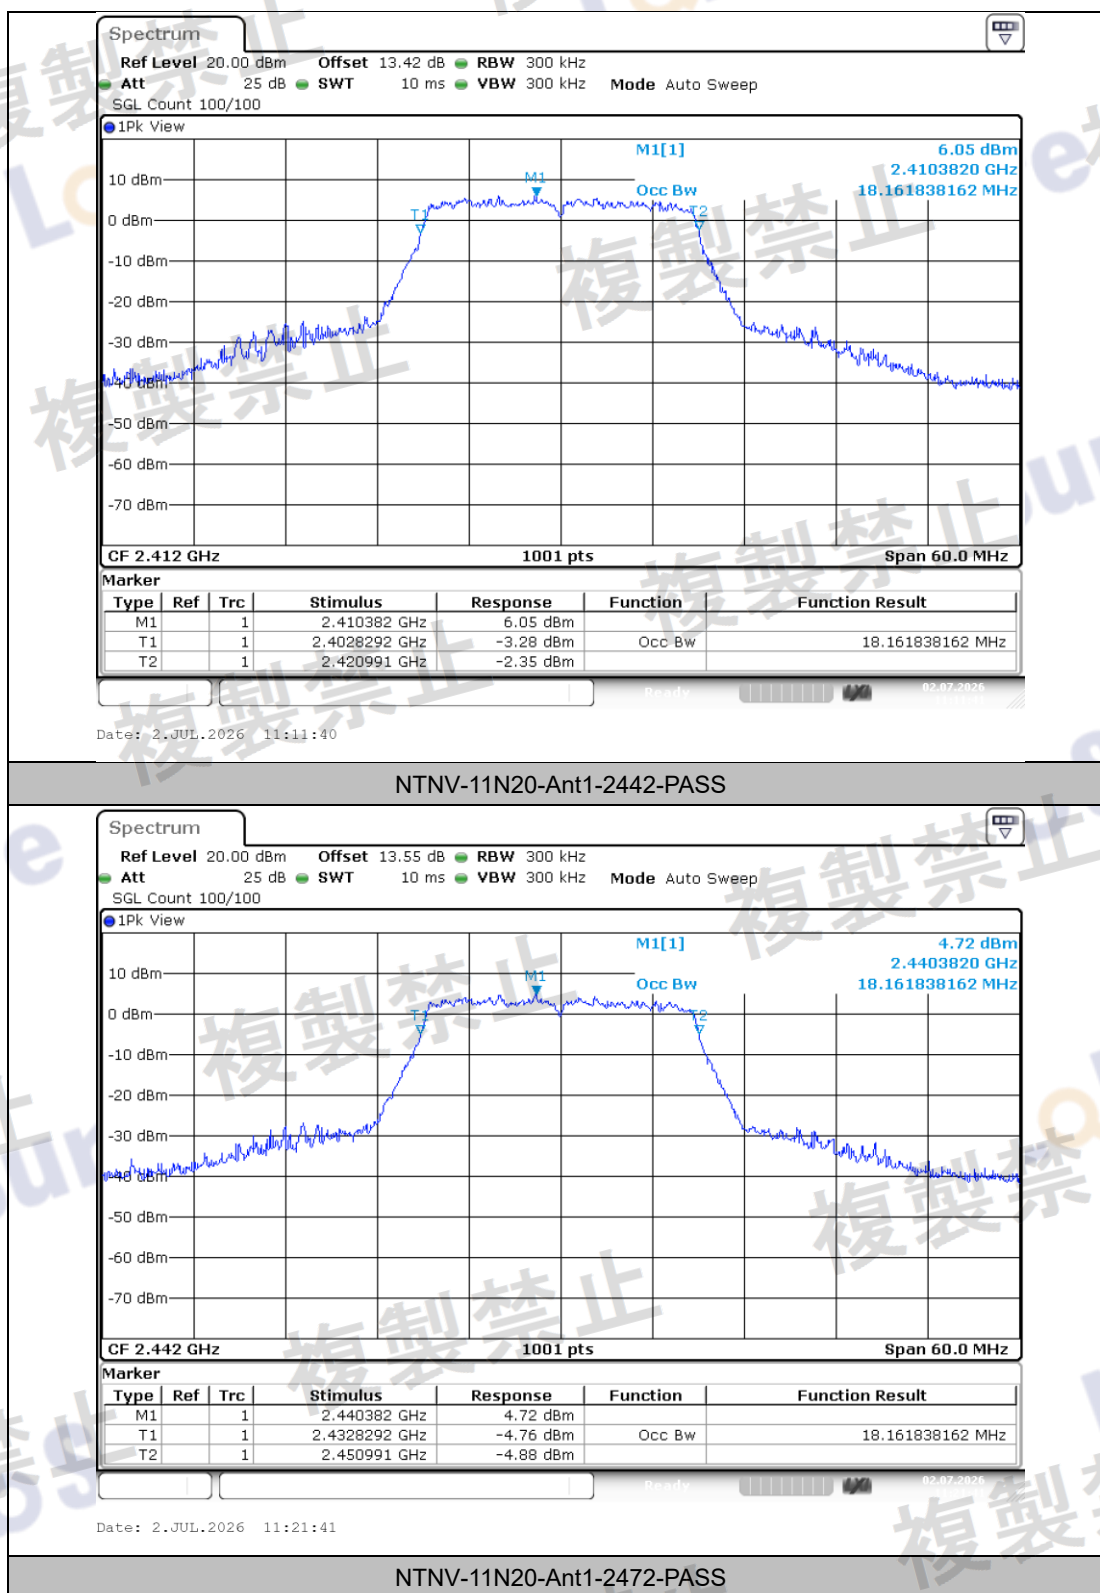

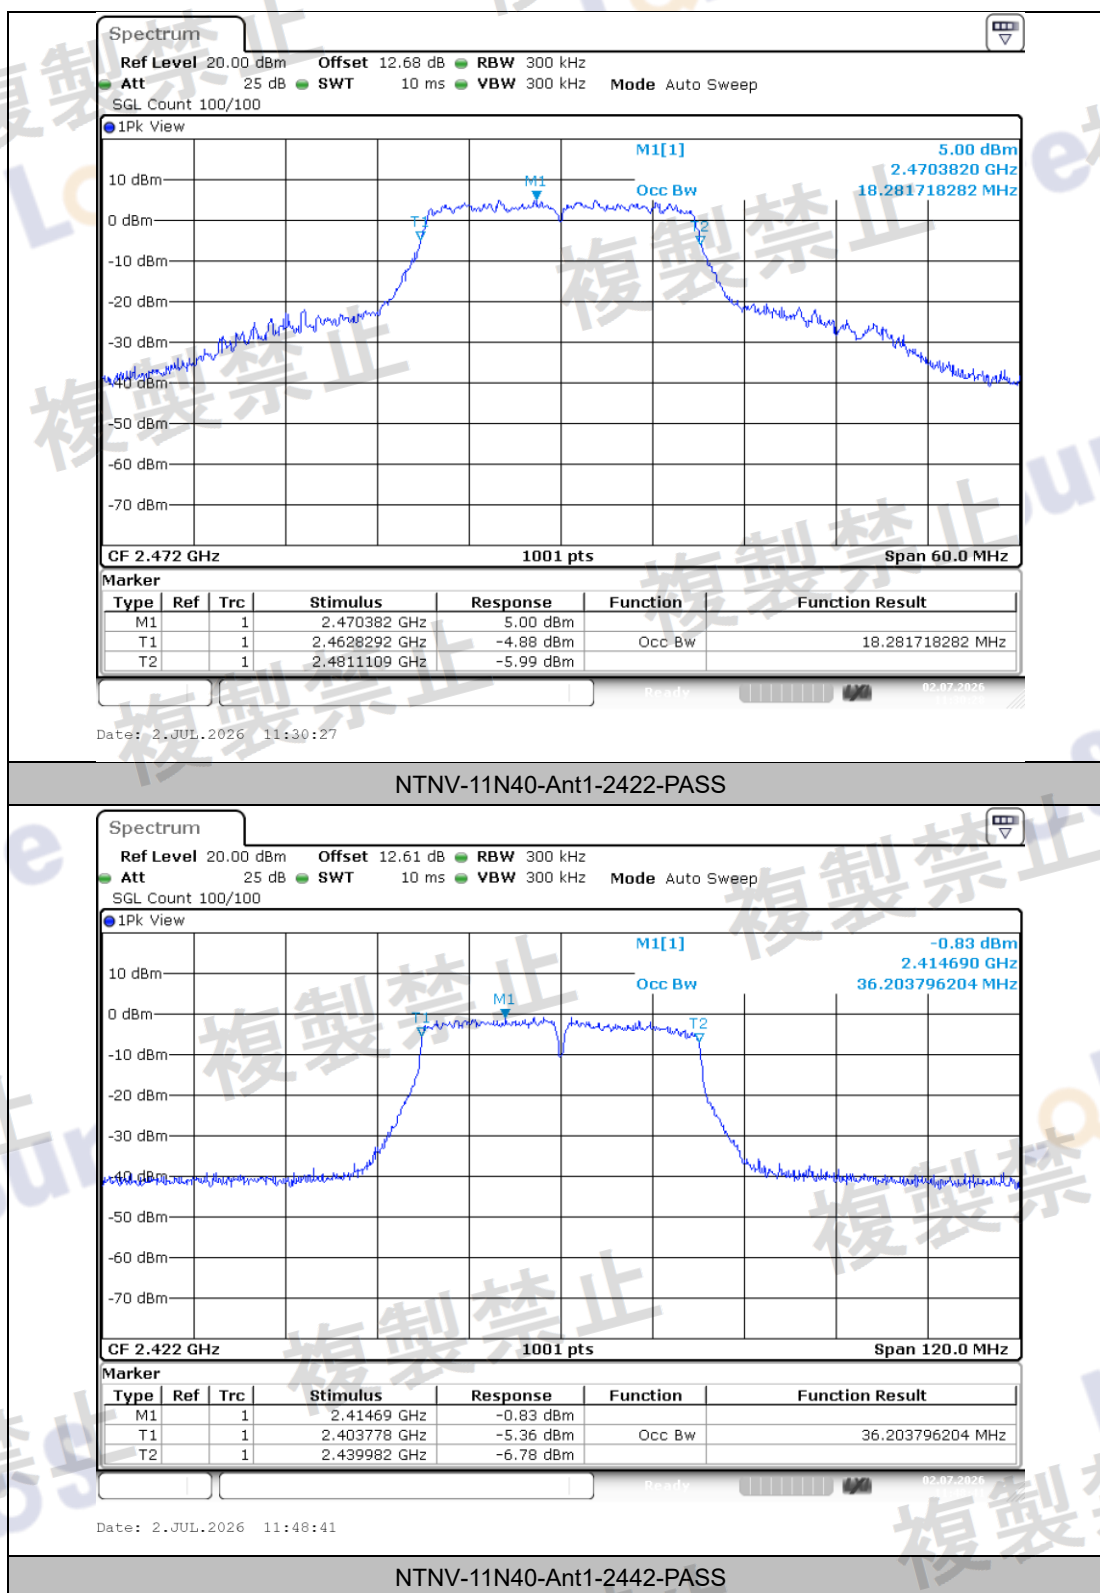

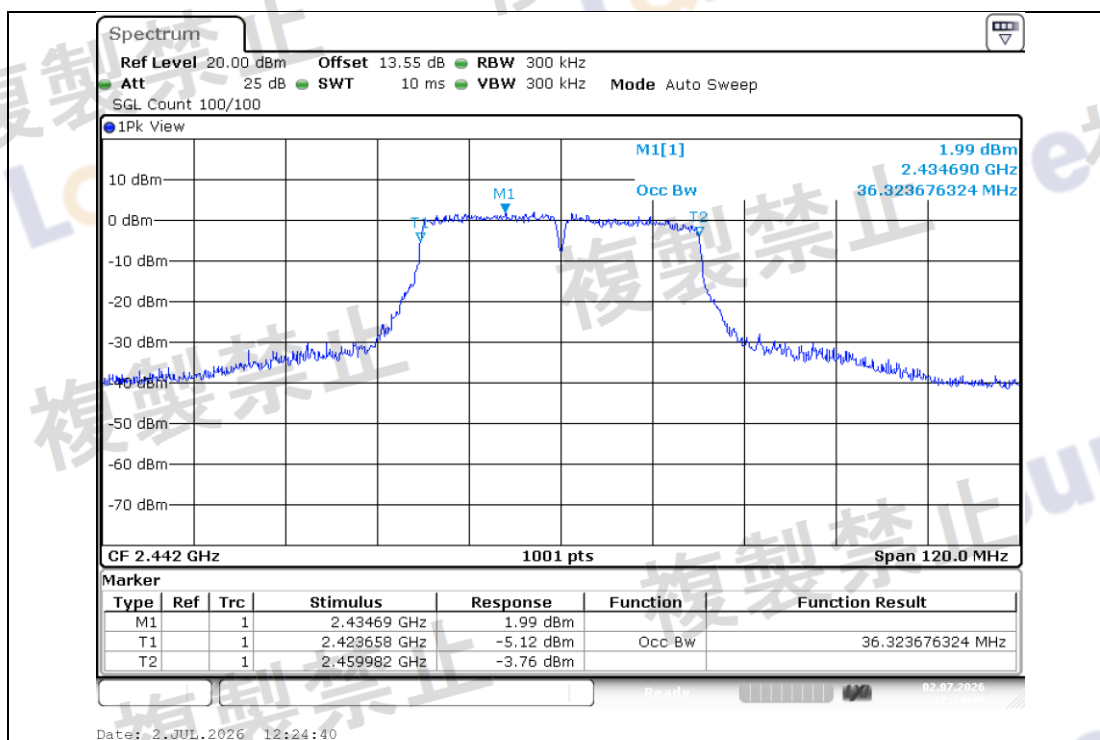

NTNV-11N40-Ant1-2462-PASS

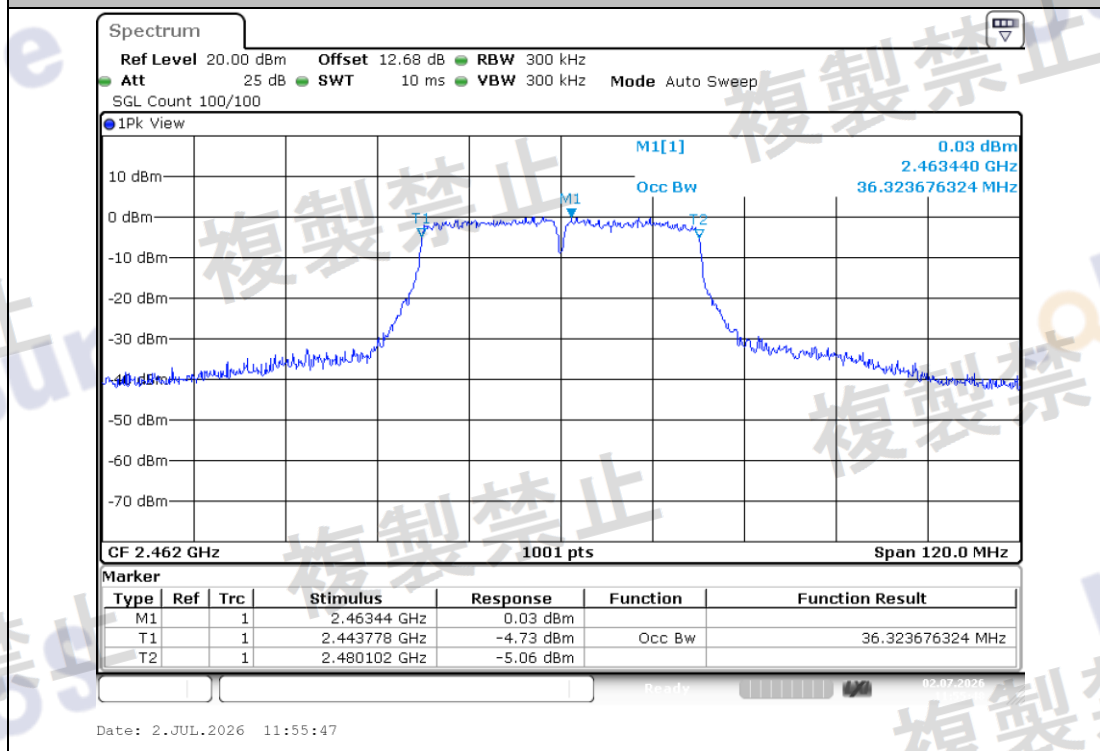

Appendix E: Spurious Emission of TX

Test Result

TestCondition	TestMode	Antenna	Frequency [MHz]	Freq.Range [MHz]	Freq. [MHz]	Result [dBm]	Limit [dBm]	Result [μW]	Limit [μW]	Verdict
NTNV	11B	Ant1	2412	30~1000	733.49	-44.54	≤-26	0.03516	≤2.5	PASS
NTNV	11B	Ant1	2412	1000~2387	2386.65	-35.15	≤-26	0.30549	≤2.5	PASS
NTNV	11B	Ant1	2412	2387~2400	2399.24	-28.44	≤-16	1.43219	≤25	PASS
NTNV	11B	Ant1	2412	2483.5~2496.5	2489.53	-31.41	≤-16	0.72277	≤25	PASS
NTNV	11B	Ant1	2412	2496.5~13000	4824.08	-34.39	≤-26	0.36392	≤2.5	PASS
NTNV	11B	Ant1	2442	30~1000	920.46	-43.95	≤-26	0.04027	≤2.5	PASS
NTNV	11B	Ant1	2442	1000~2387	2373.82	-39.14	≤-26	0.12190	≤2.5	PASS
NTNV	11B	Ant1	2442	2387~2400	2399.95	-31.64	≤-16	0.68549	≤25	PASS
NTNV	11B	Ant1	2442	2483.5~2496.5	2492.72	-31.08	≤-16	0.77983	≤25	PASS
NTNV	11B	Ant1	2442	2496.5~13000	2501.23	-35.76	≤-26	0.26546	≤2.5	PASS
NTNV	11B	Ant1	2472	30~1000	880.93	-44.60	≤-26	0.03467	≤2.5	PASS
NTNV	11B	Ant1	2472	1000~2387	2357.87	-38.60	≤-26	0.13804	≤2.5	PASS
NTNV	11B	Ant1	2472	2387~2400	2399.55	-31.56	≤-16	0.69823	≤25	PASS
NTNV	11B	Ant1	2472	2483.5~2496.5	2483.53	-27.76	≤-16	1.67494	≤25	PASS
NTNV	11B	Ant1	2472	2496.5~13000	2497.55	-30.52	≤-26	0.88716	≤2.5	PASS
NTNV	11G	Ant1	2412	30~1000	842.86	-44.78	≤-26	0.03327	≤2.5	PASS
NTNV	11G	Ant1	2412	1000~2387	2385.27	-29.24	≤-26	1.19124	≤2.5	PASS
NTNV	11G	Ant1	2412	2387~2400	2399.99	-12.40	≤-16	57.54399	≤25	See table below
NTNV	11G	Ant1	2412	2483.5~2496.5	2484.29	-31.26	≤-16	0.74817	≤25	PASS
NTNV	11G	Ant1	2412	2496.5~13000	2513.83	-35.85	≤-26	0.26002	≤2.5	PASS
NTNV	11G	Ant1	2442	30~1000	926.04	-44.82	≤-26	0.03296	≤2.5	PASS
NTNV	11G	Ant1	2442	1000~2387	2357.18	-38.68	≤-26	0.13552	≤2.5	PASS
NTNV	11G	Ant1	2442	2387~2400	2392.43	-31.37	≤-16	0.72946	≤25	PASS
NTNV	11G	Ant1	2442	2483.5~2496.5	2488.60	-30.92	≤-16	0.80910	≤25	PASS
NTNV	11G	Ant1	2442	2496.5~13000	2497.03	-36.28	≤-26	0.23550	≤2.5	PASS
NTNV	11G	Ant1	2472	30~1000	917.55	-44.67	≤-26	0.03412	≤2.5	PASS
NTNV	11G	Ant1	2472	1000~2387	2376.25	-39.33	≤-26	0.11668	≤2.5	PASS
NTNV	11G	Ant1	2472	2387~2400	2394.88	-31.79	≤-16	0.66222	≤25	PASS
NTNV	11G	Ant1	2472	2483.5~2496.5	2483.6	-12.68	≤-16	53.95106	≤25	See table below
NTNV	11G	Ant1	2472	2496.5~13000	2501.23	-33.25	≤-26	0.47315	≤2.5	PASS
NTNV	11N20	Ant1	2412	30~1000	904.21	-44.17	≤-26	0.03828	≤2.5	PASS
NTNV	11N20	Ant1	2412	1000~2387	2383.53	-35.52	≤-26	0.28054	≤2.5	PASS
NTNV	11N20	Ant1	2412	2387~2400	2399.99	-13.45	≤-16	45.18559	≤25	See


										table below
NTNV	11N20	Ant1	2412	2483.5~2496.5	2483.75	-31.25	≤-16	0.74989	≤25	PASS
NTNV	11N20	Ant1	2412	2496.5~13000	2509.63	-35.89	≤-26	0.25763	≤2.5	PASS
NTNV	11N20	Ant1	2442	30~1000	748.53	-44.62	≤-26	0.03451	≤2.5	PASS
NTNV	11N20	Ant1	2442	1000~2387	2346.08	-38.13	≤-26	0.15382	≤2.5	PASS
NTNV	11N20	Ant1	2442	2387~2400	2388.19	-31.81	≤-16	0.65917	≤25	PASS
NTNV	11N20	Ant1	2442	2483.5~2496.5	2487.06	-30.38	≤-16	0.91622	≤25	PASS
NTNV	11N20	Ant1	2442	2496.5~13000	2500.18	-35.85	≤-26	0.26002	≤2.5	PASS
NTNV	11N20	Ant1	2472	30~1000	911.73	-44.55	≤-26	0.03508	≤2.5	PASS
NTNV	11N20	Ant1	2472	1000~2387	2382.49	-38.83	≤-26	0.13092	≤2.5	PASS
NTNV	11N20	Ant1	2472	2387~2400	2393.99	-31.84	≤-16	0.65464	≤25	PASS
NTNV	11N20	Ant1	2472	2483.5~2496.5	2483.53	-13.36	≤-16	46.13176	≤25	See table below
NTNV	11N20	Ant1	2472	2496.5~13000	2499.13	-32.23	≤-26	0.59841	≤2.5	PASS
NTNV	11N40	Ant1	2422	30~1000	811.82	-44.40	≤-26	0.03631	≤2.5	PASS
NTNV	11N40	Ant1	2422	1000~2387	2386.65	-33.48	≤-26	0.44875	≤2.5	PASS
NTNV	11N40	Ant1	2422	2387~2400	2399.97	-12.58	≤-16	55.20774	≤25	See table below
NTNV	11N40	Ant1	2422	2483.5~2496.5	2484.88	-30.74	≤-16	0.84333	≤25	PASS
NTNV	11N40	Ant1	2422	2496.5~13000	2499.65	-34.86	≤-26	0.32659	≤2.5	PASS
NTNV	11N40	Ant1	2442	30~1000	814.49	-44.79	≤-26	0.03319	≤2.5	PASS
NTNV	11N40	Ant1	2442	1000~2387	2384.57	-31.92	≤-26	0.64269	≤2.5	PASS
NTNV	11N40	Ant1	2442	2387~2400	2399.19	-23.88	≤-16	4.09261	≤25	PASS
NTNV	11N40	Ant1	2442	2483.5~2496.5	2484.40	-23.48	≤-16	4.48745	≤25	PASS
NTNV	11N40	Ant1	2442	2496.5~13000	2498.08	-29.76	≤-26	1.05682	≤2.5	PASS
NTNV	11N40	Ant1	2462	30~1000	861.53	-43.37	≤-26	0.04603	≤2.5	PASS
NTNV	11N40	Ant1	2462	1000~2387	2384.23	-38.25	≤-26	0.14962	≤2.5	PASS
NTNV	11N40	Ant1	2462	2387~2400	2391.80	-31.12	≤-16	0.77268	≤25	PASS
NTNV	11N40	Ant1	2462	2483.5~2496.5	2483.51	-14.84	≤-16	32.80953	≤25	See table below
NTNV	11N40	Ant1	2462	2496.5~13000	2497.55	-27.19	≤-26	1.90985	≤2.5	See table below


Test Result_Step2

Test Condition	Test Mode	Antenna	Frequency [MHz]	Freq. [MHz]	Result [dBm]	Result [μW]	Limit [μW]	Verdict
NTNV	11G	Ant1	2412	2399.99	-25.72	0.00268	≤25	PASS
NTNV	11G	Ant1	2472	2483.50	-30.19	0.00096	≤25	PASS
NTNV	11N20	Ant1	2412	2400.00	-28.65	0.00136	≤25	PASS
NTNV	11N20	Ant1	2472	2483.50	-30.10	0.00098	≤25	PASS
NTNV	11N40	Ant1	2422	2399.98	-29.39	0.00115	≤25	PASS
NTNV	11N40	Ant1	2462	2483.53	-31.71	0.00067	≤25	PASS
NTNV	11N40	Ant1	2462	2496.79	-45.55	0.00003	≤2.5	PASS


Note: The frequencies of over limit are all within 1MHz with the same modulation and data rate, therefor the final measured is done for maximum peak value of frequency that over limit, if the final measured frequency is complies with limit, the others frequencies are deemed to comply with limit.

Test Graphs

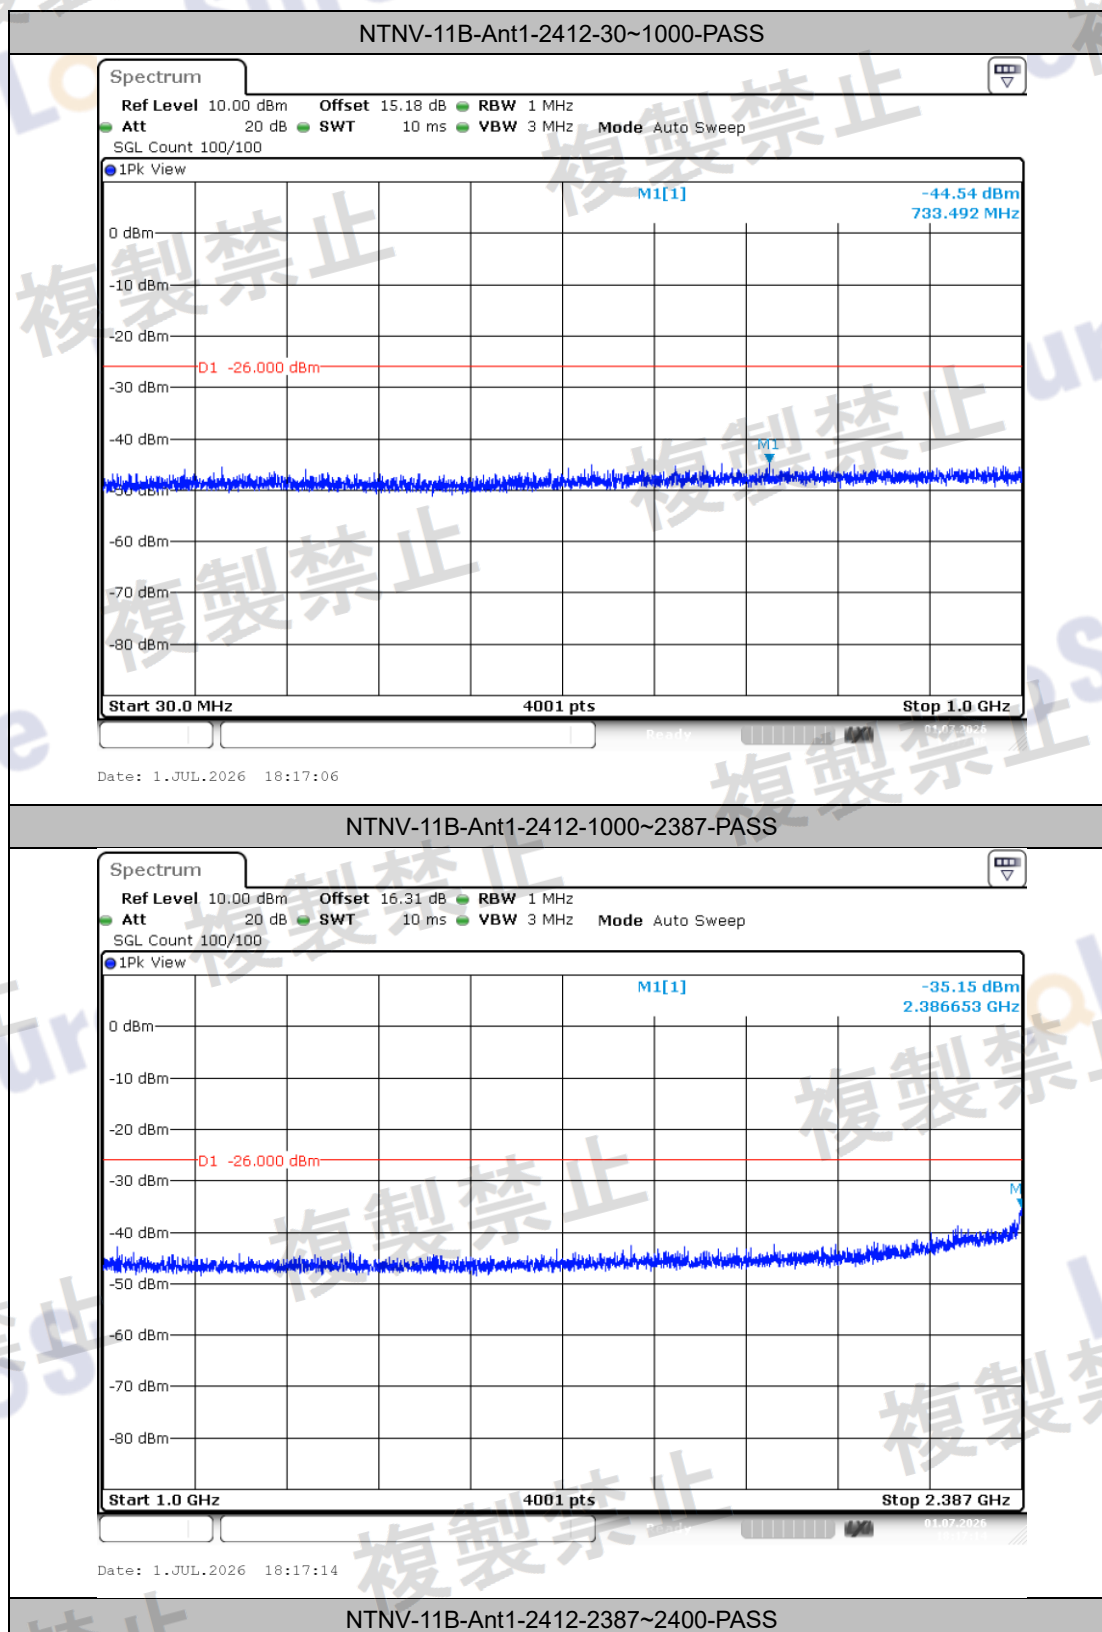


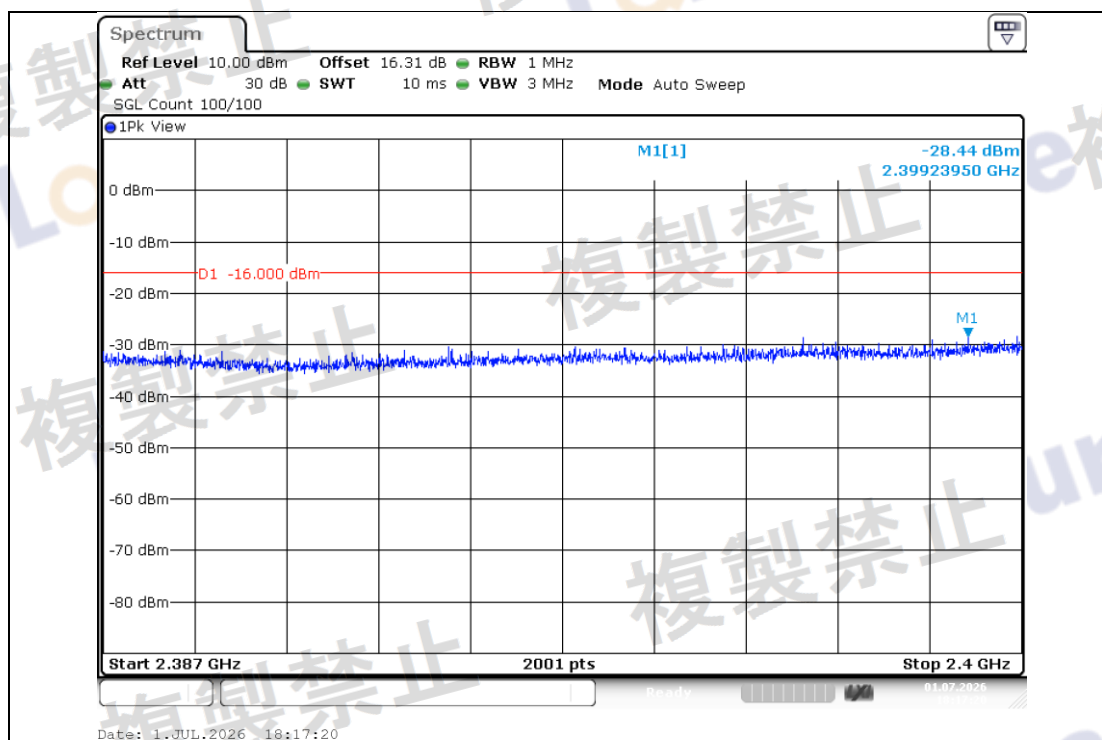


NTNV-11B-Ant1-2412-2483.5~2496.5-PASS

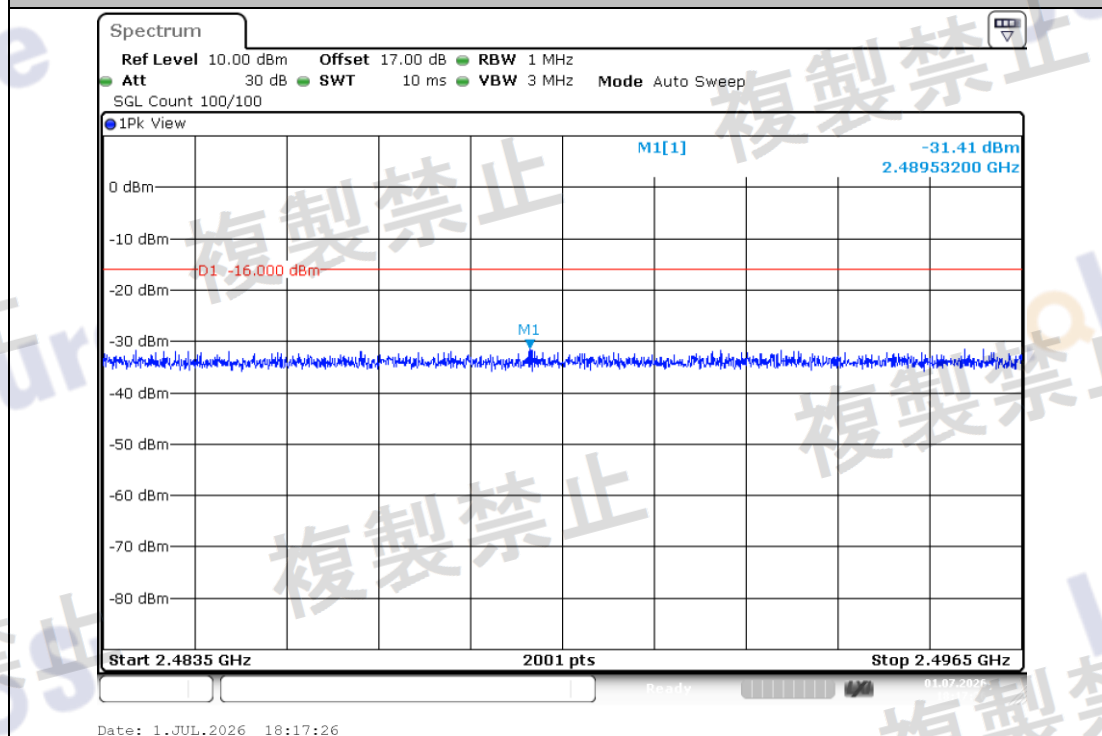


NTNV-11B-Ant1-2412-2496.5~13000-PASS

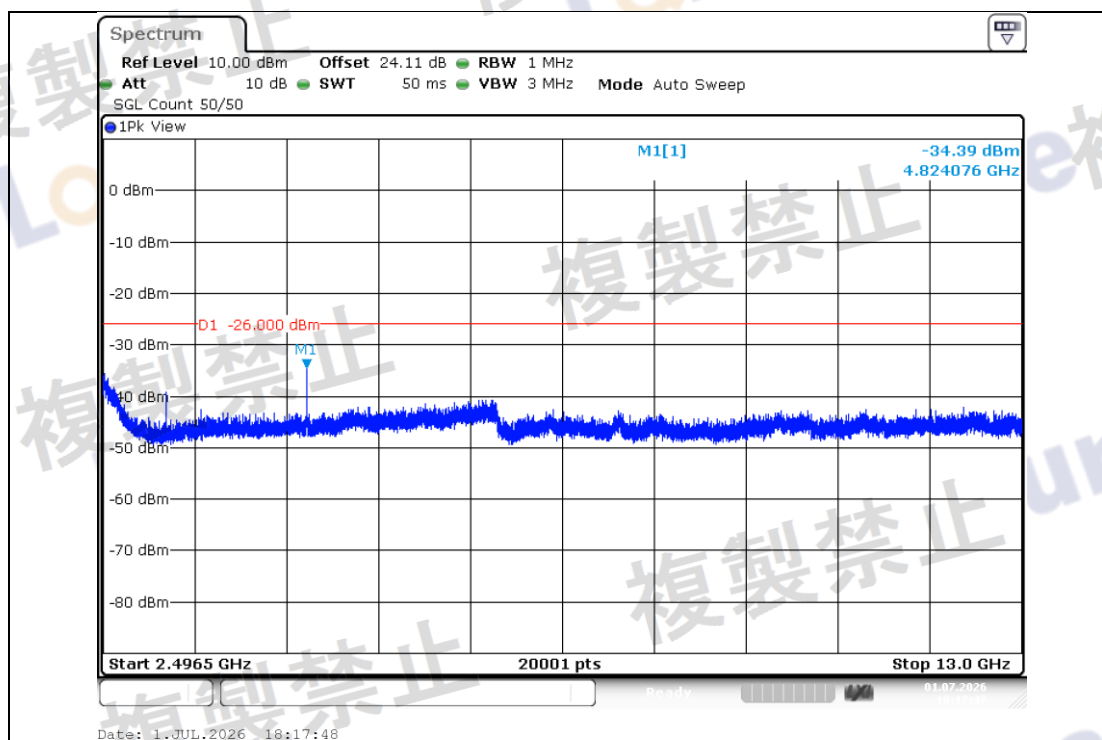


NTNV-11B-Ant1-2442-30~1000-PASS

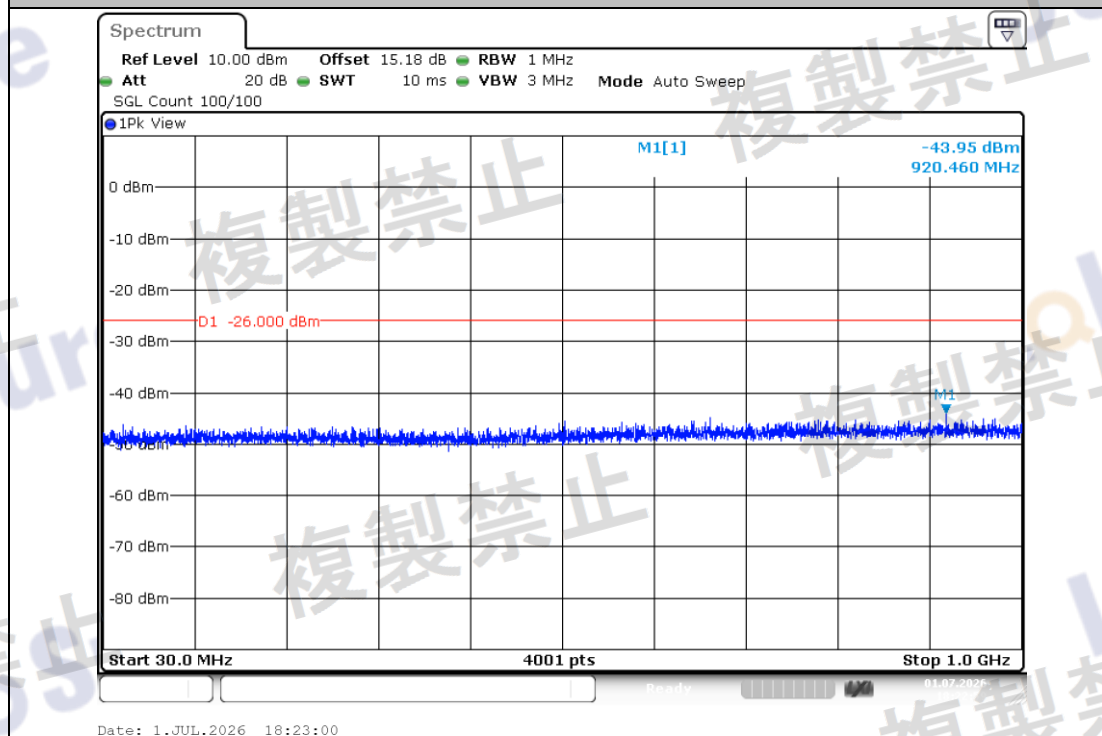


NTNV-11B-Ant1-2442-1000~2387-PASS

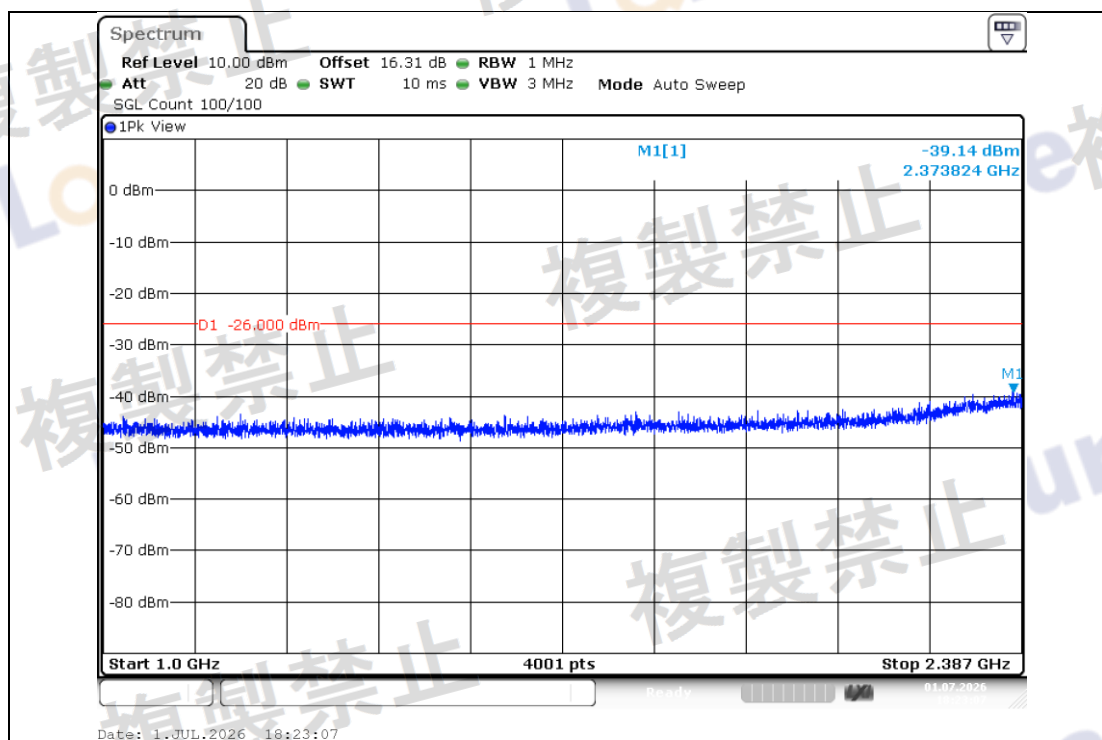


NTNV-11B-Ant1-2442-2387~2400-PASS

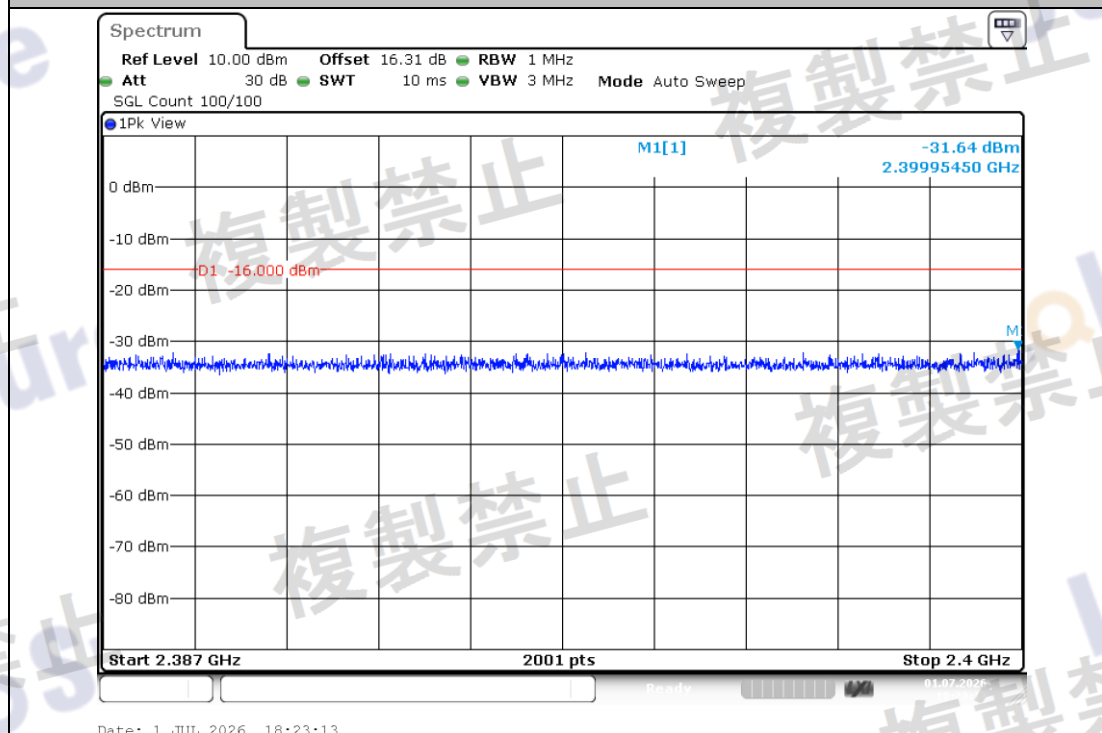


NTNV-11B-Ant1-2442-2483.5~2496.5-PASS

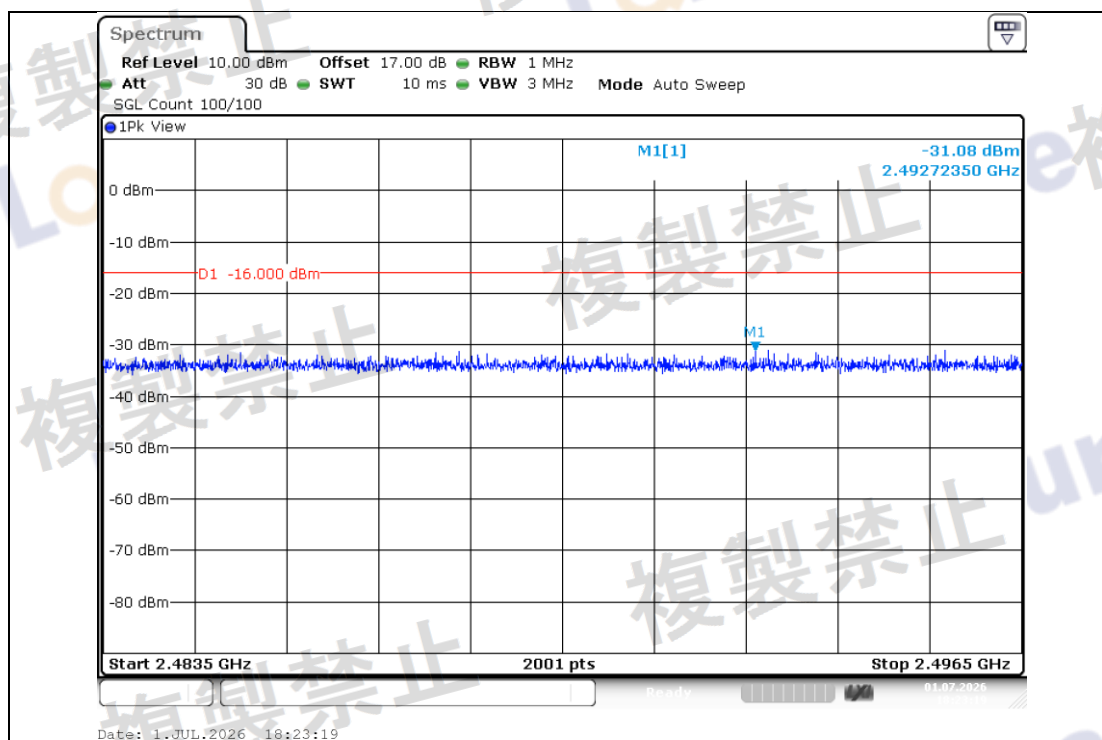


NTNV-11B-Ant1-2442-2496.5~13000-PASS

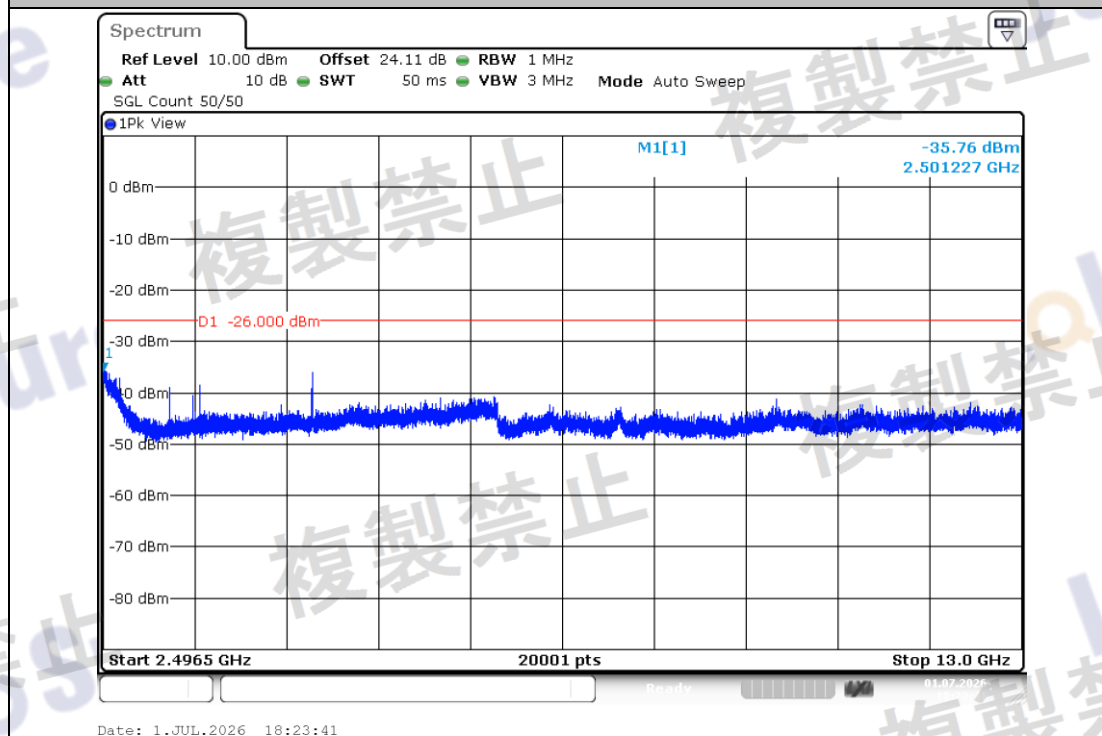


NTNV-11B-Ant1-2472-30~1000-PASS

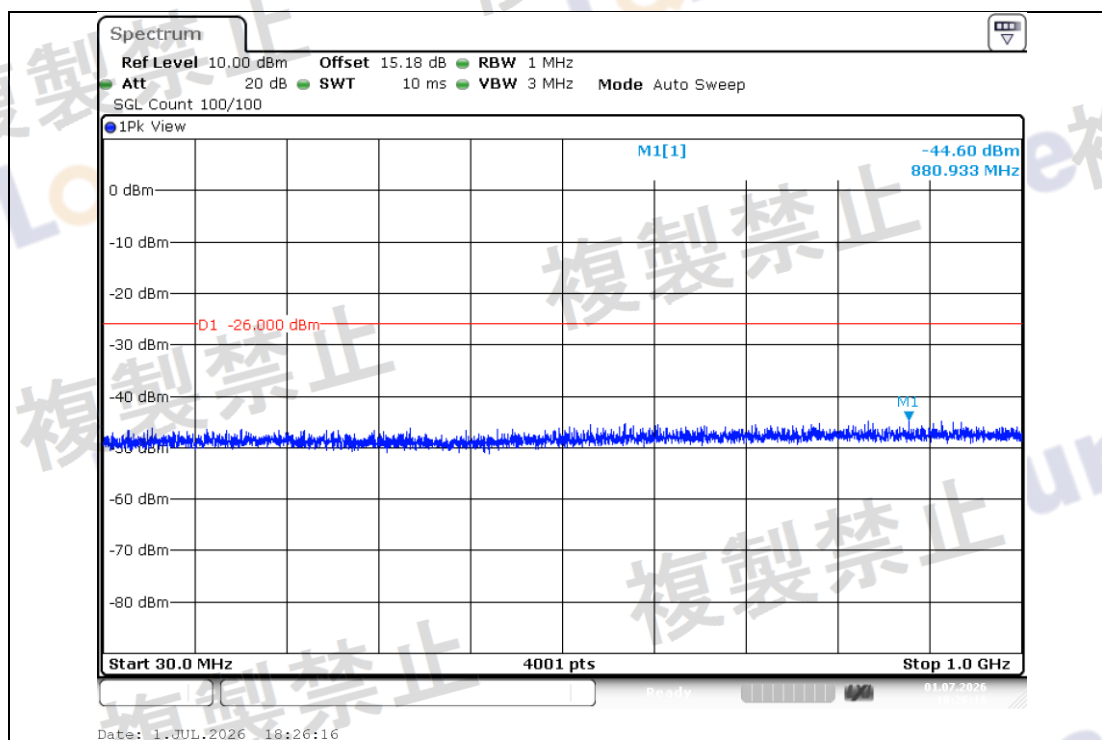


NTNV-11B-Ant1-2472-1000~2387-PASS

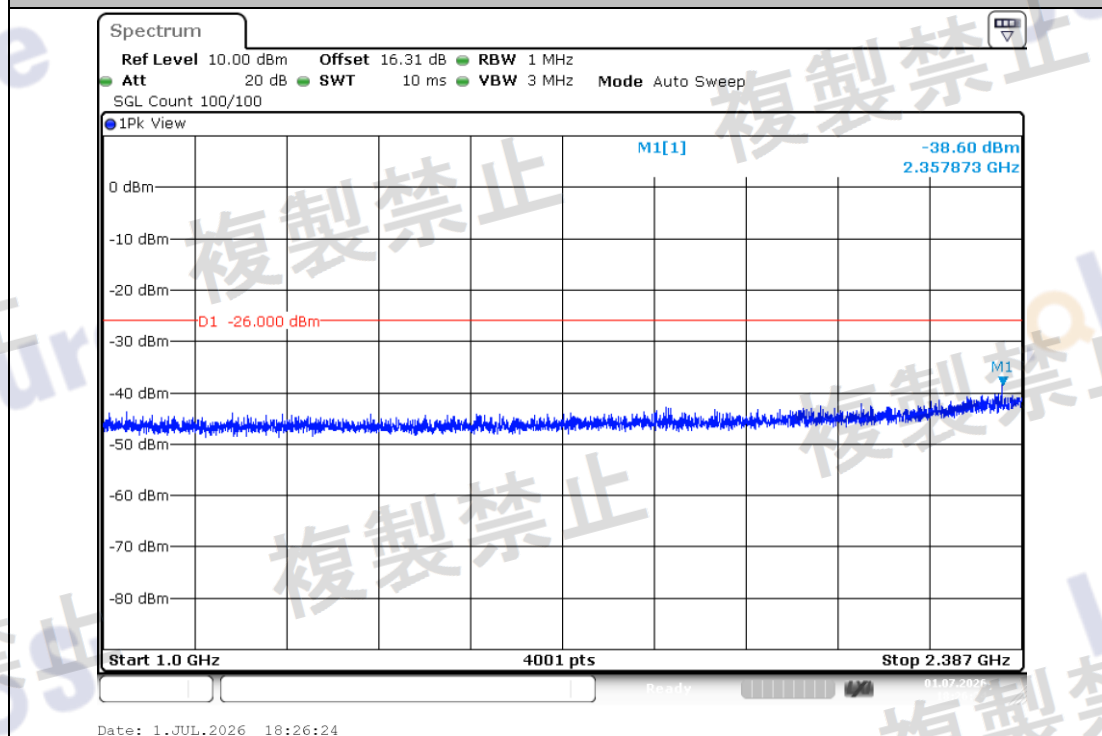


NTNV-11B-Ant1-2472-2387~2400-PASS

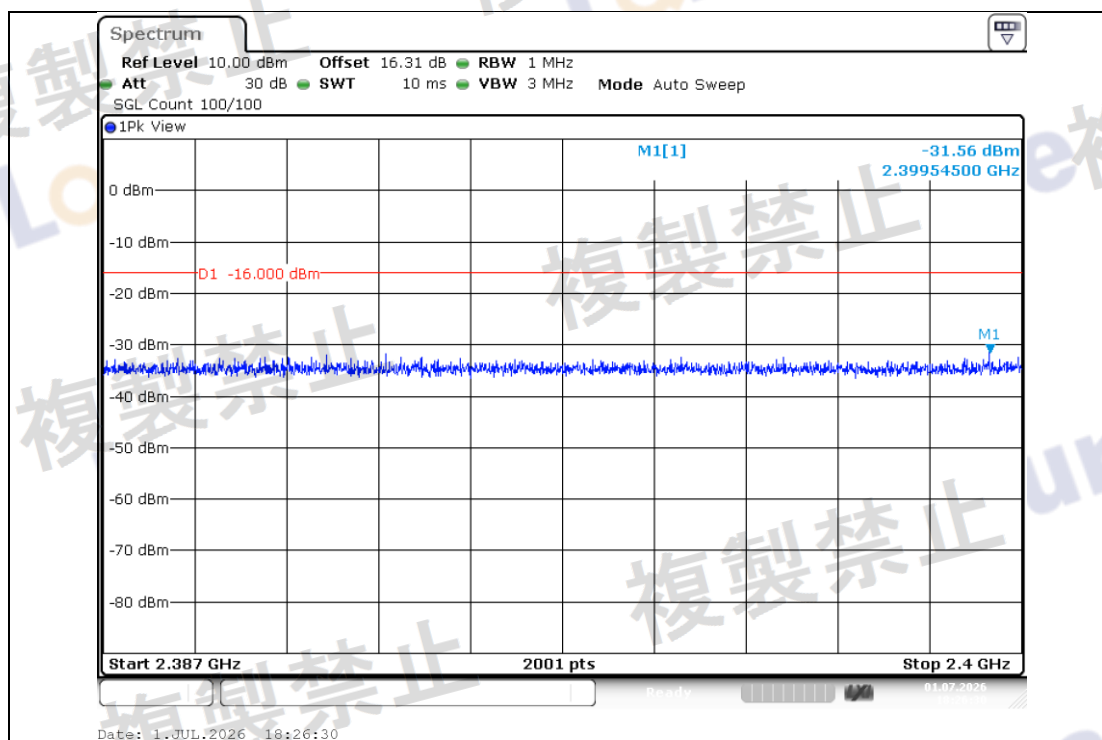


NTNV-11B-Ant1-2472-2483.5~2496.5-PASS

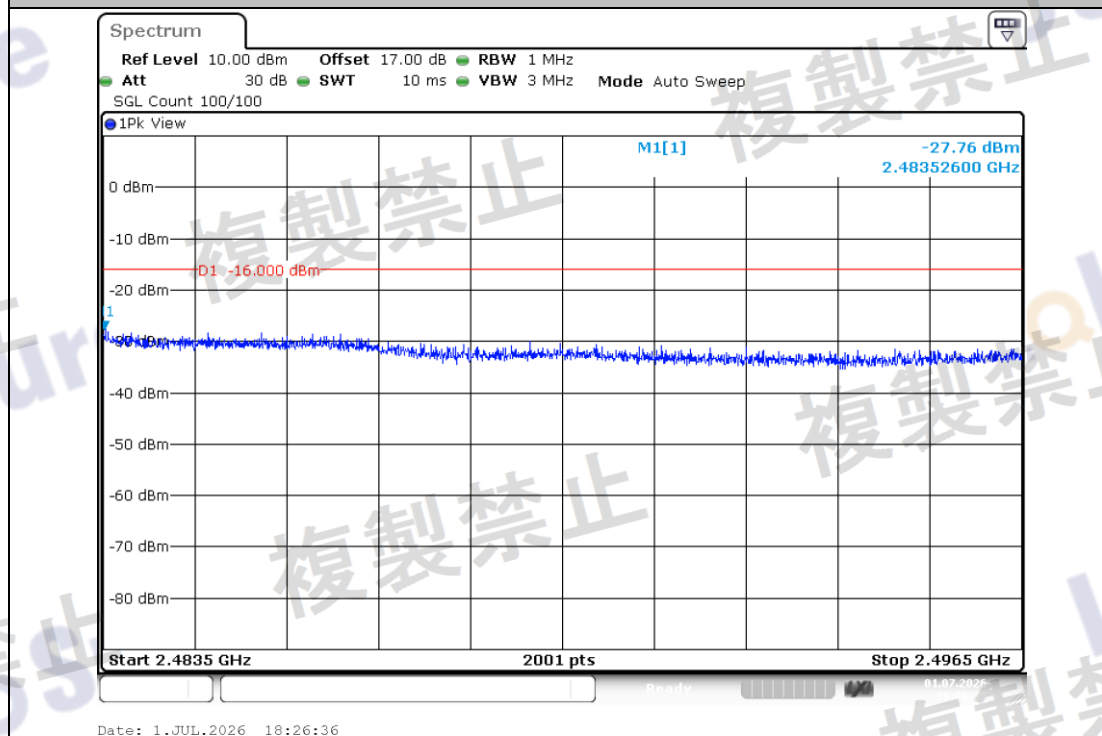


NTNV-11B-Ant1-2472-2496.5~13000-PASS

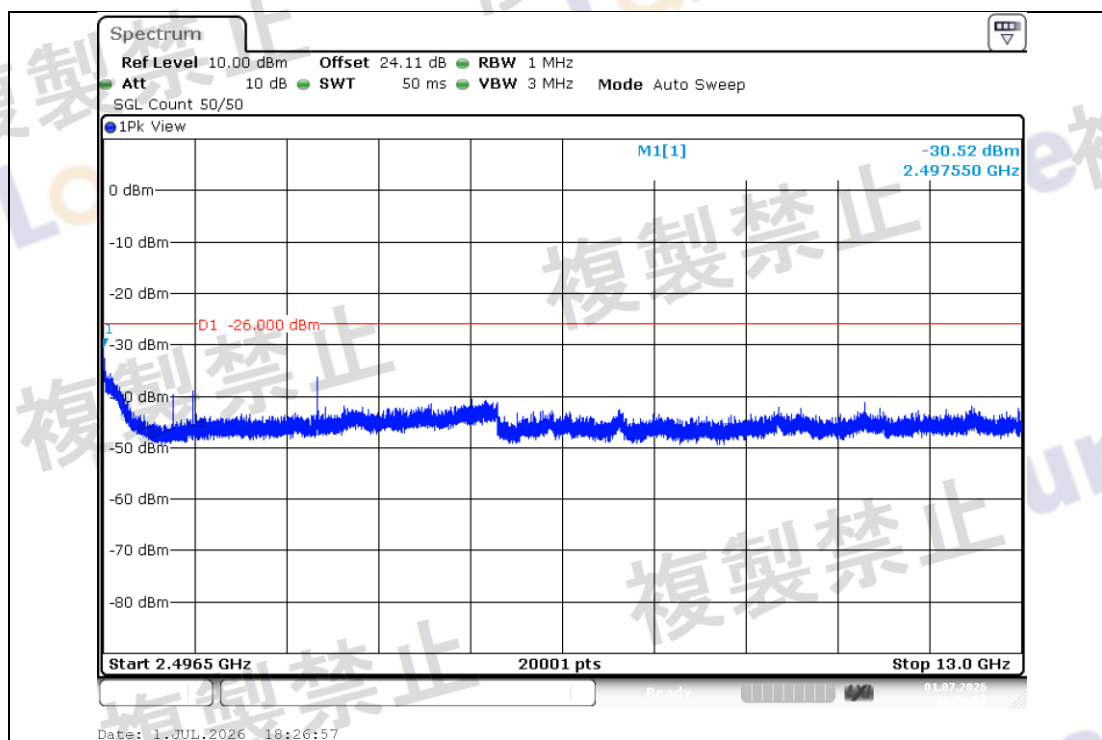


NTNV-11G-Ant1-2412-30~1000-PASS

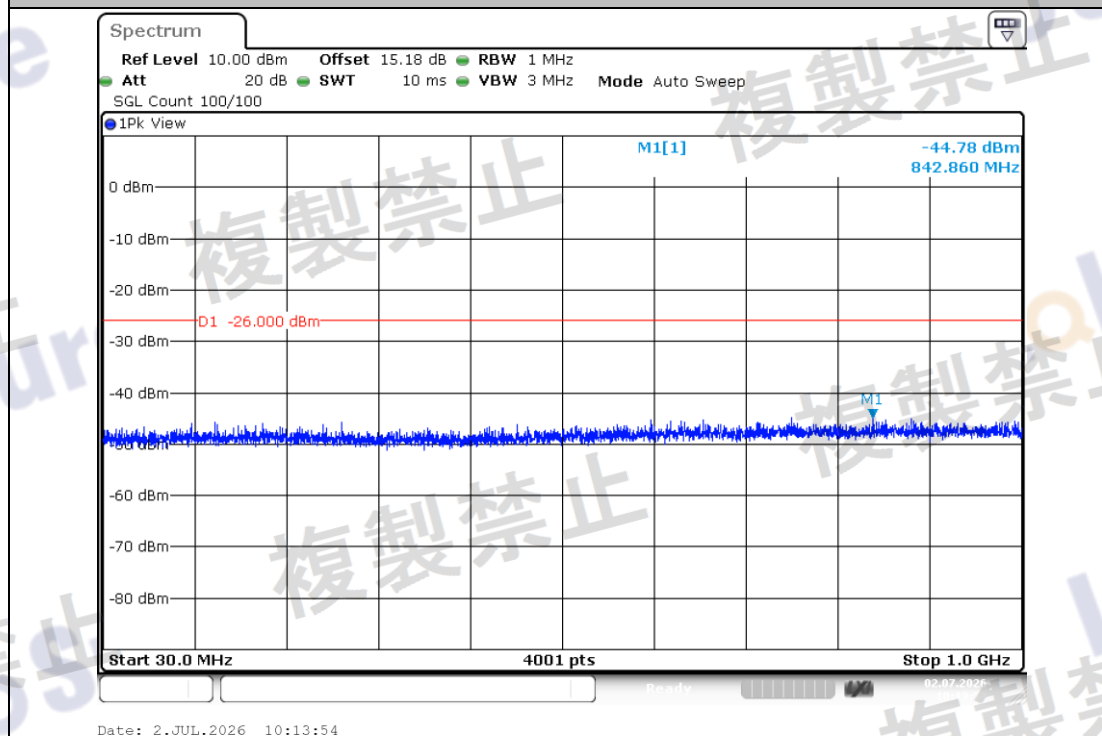


NTNV-11G-Ant1-2412-1000~2387-PASS

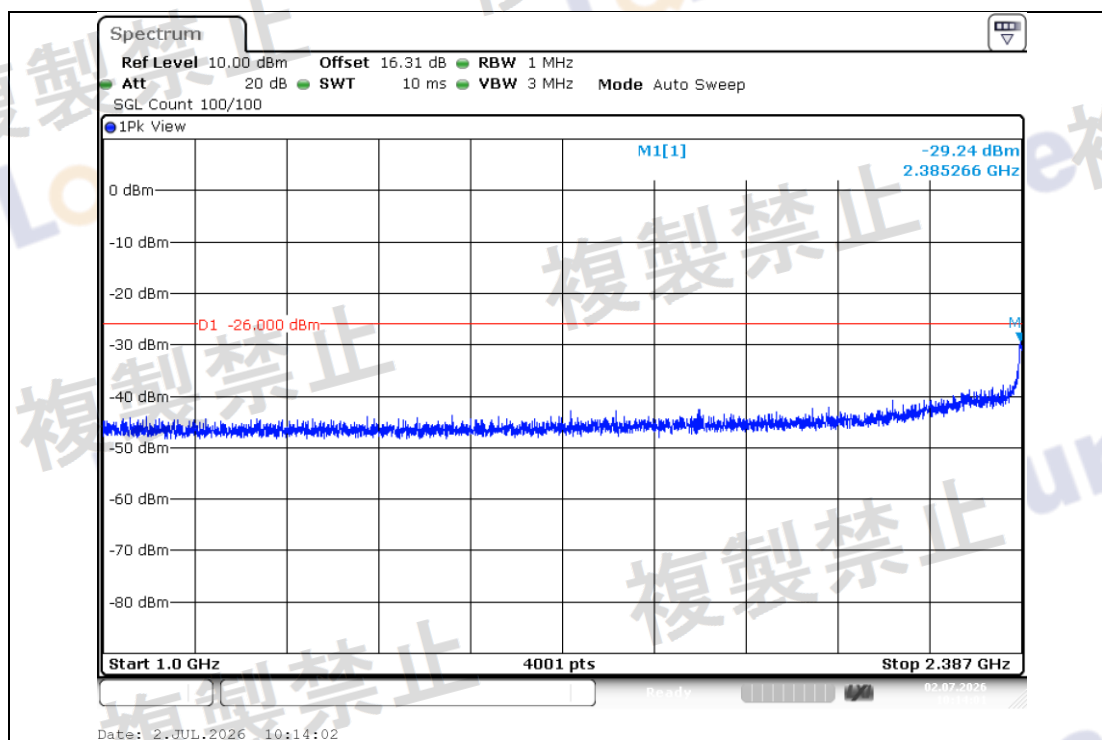


NTNV-11G-Ant1-2412-2387~2400-See table below

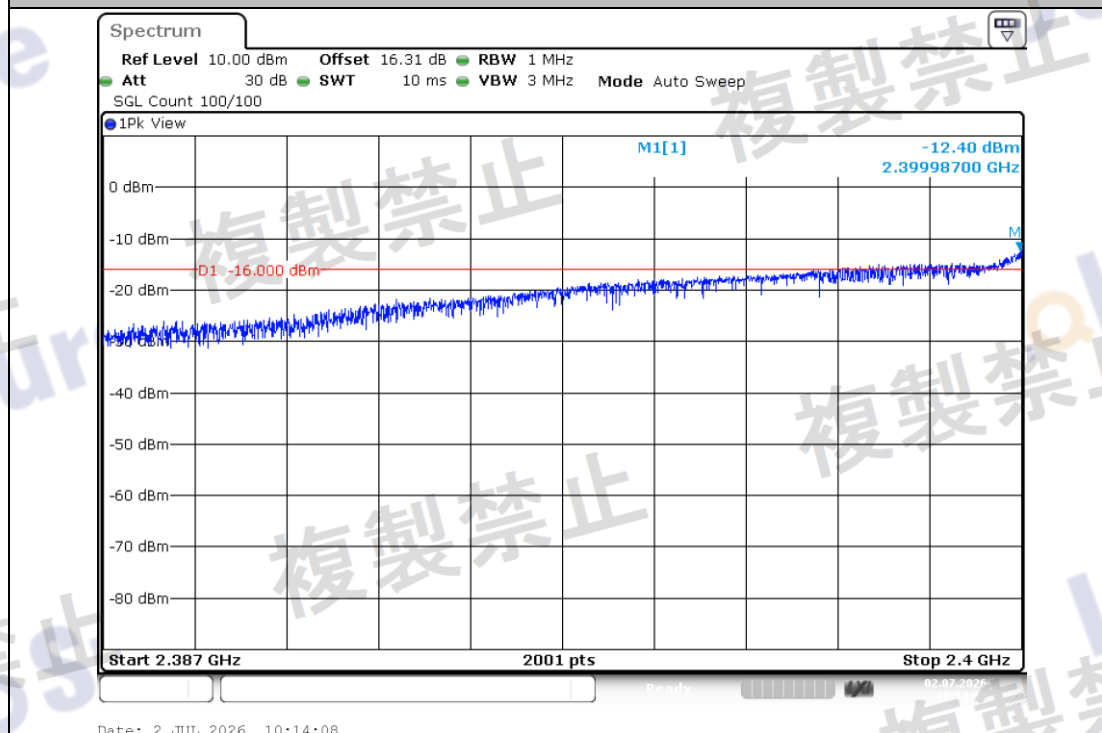


NTNV-11G-Ant1-2412-2483.5~2496.5-PASS

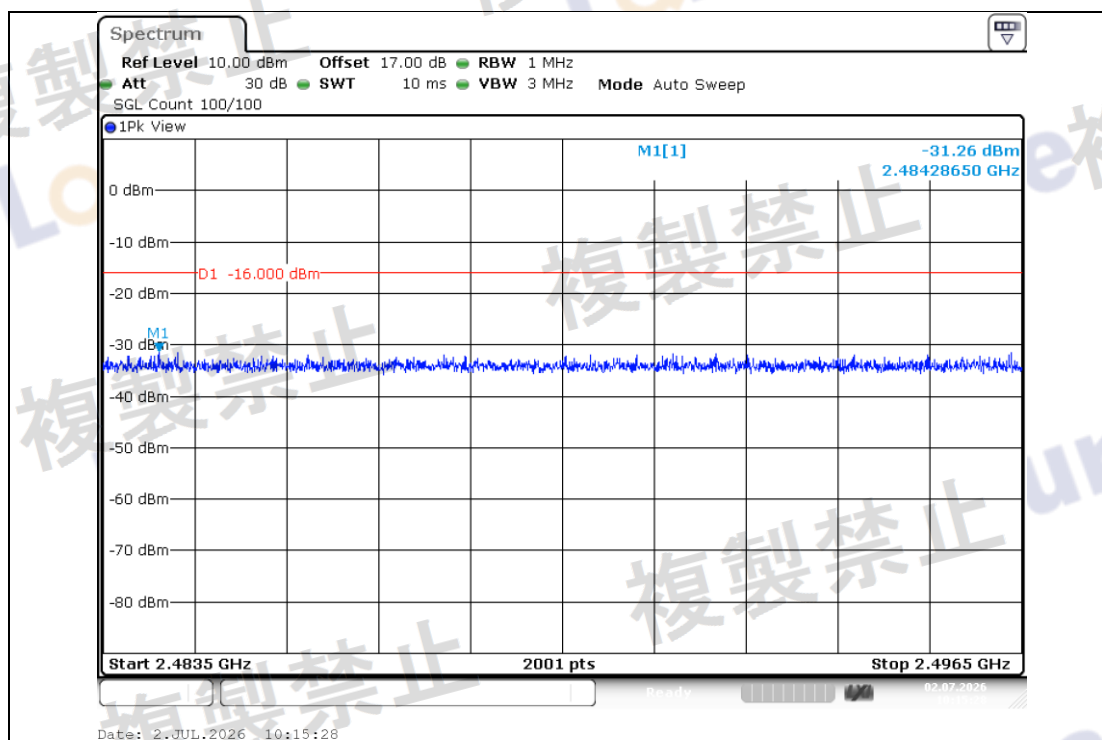


NTNV-11G-Ant1-2412-2496.5~13000-PASS

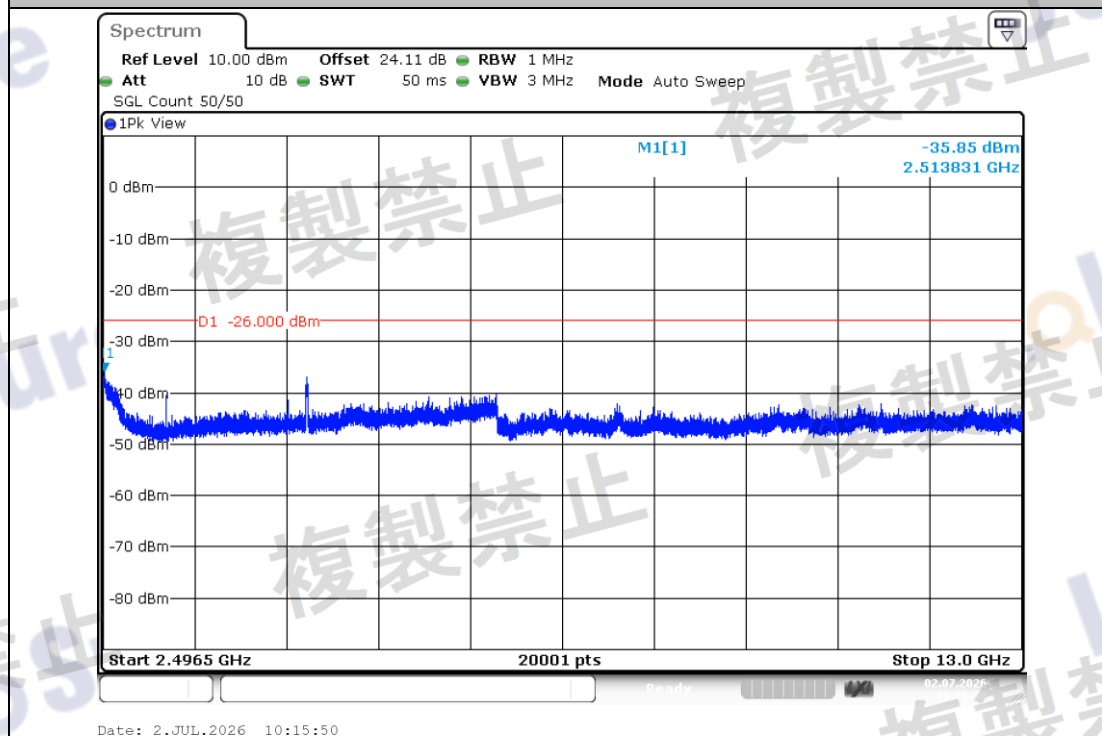


NTNV-11G-Ant1-2442-30~1000-PASS

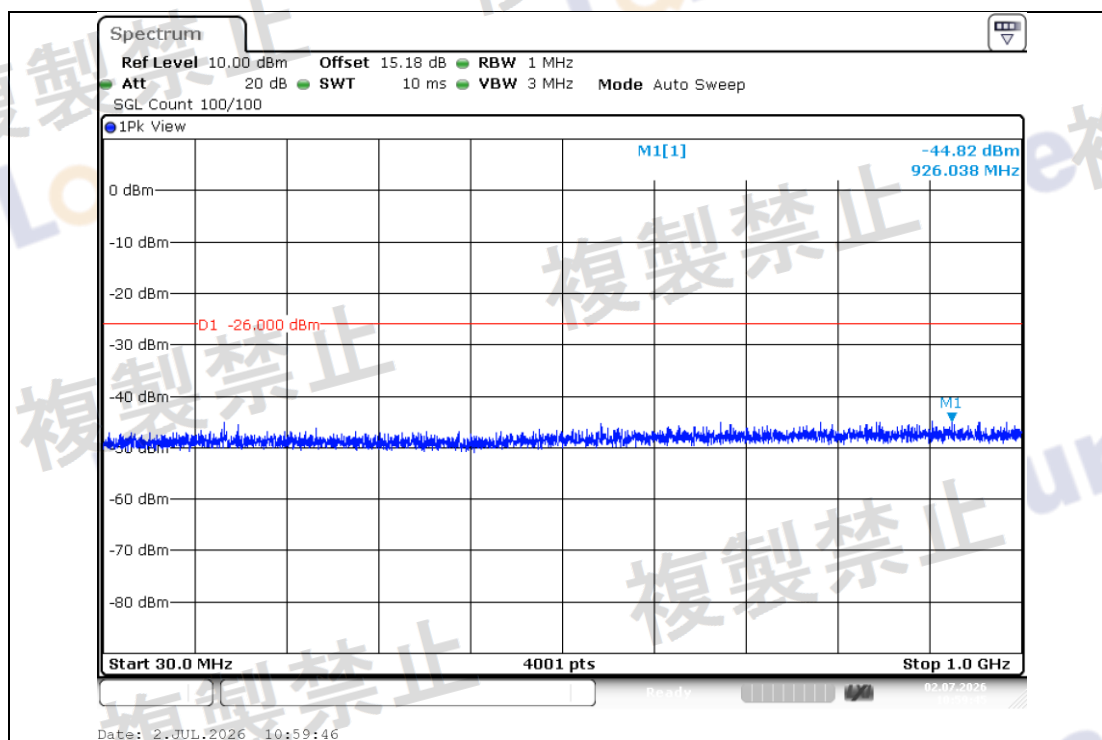


NTNV-11G-Ant1-2442-1000~2387-PASS

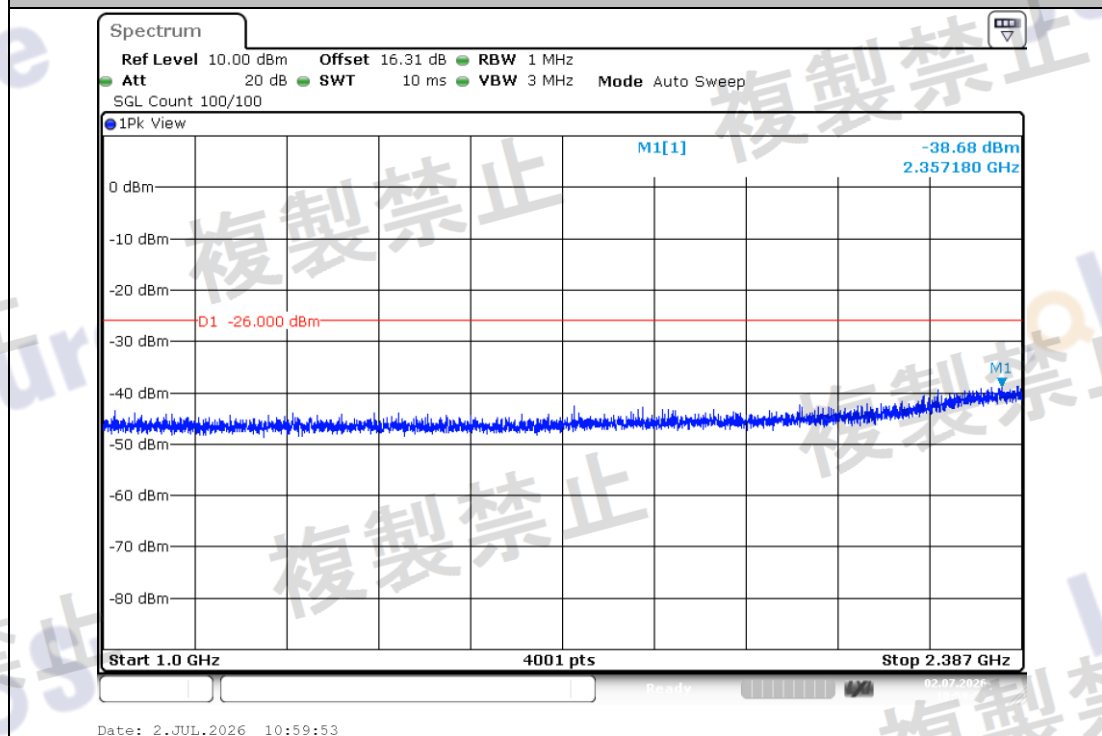


NTNV-11G-Ant1-2442-2387~2400-PASS

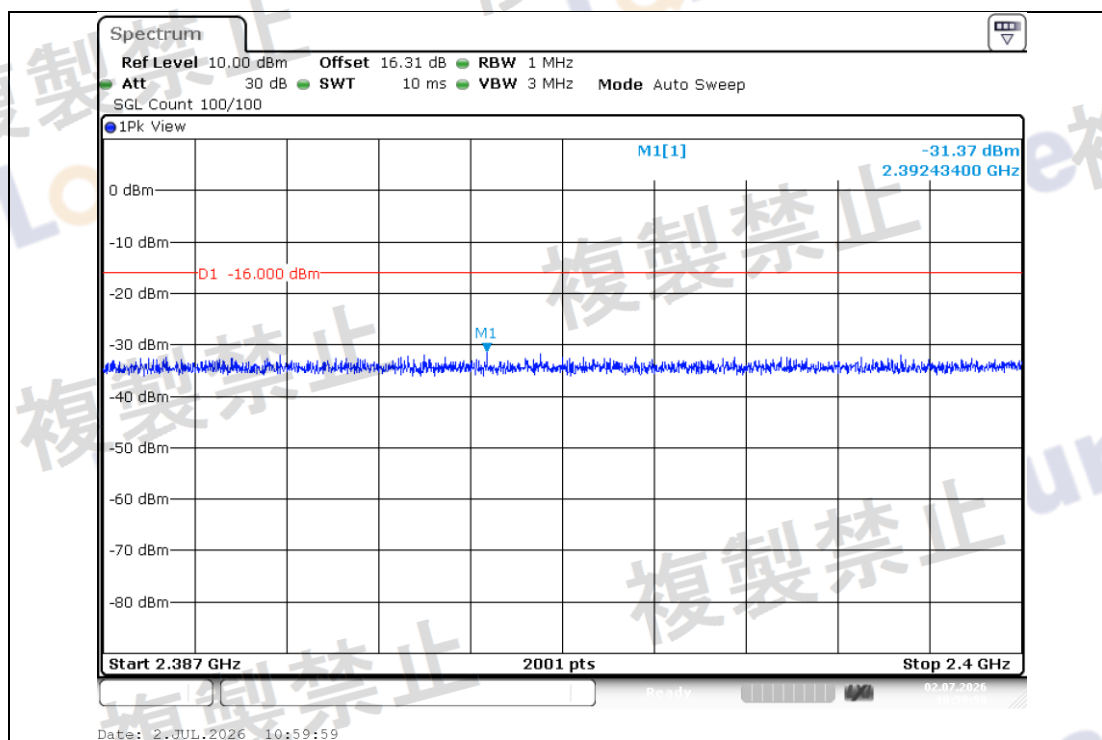


NTNV-11G-Ant1-2442-2483.5~2496.5-PASS

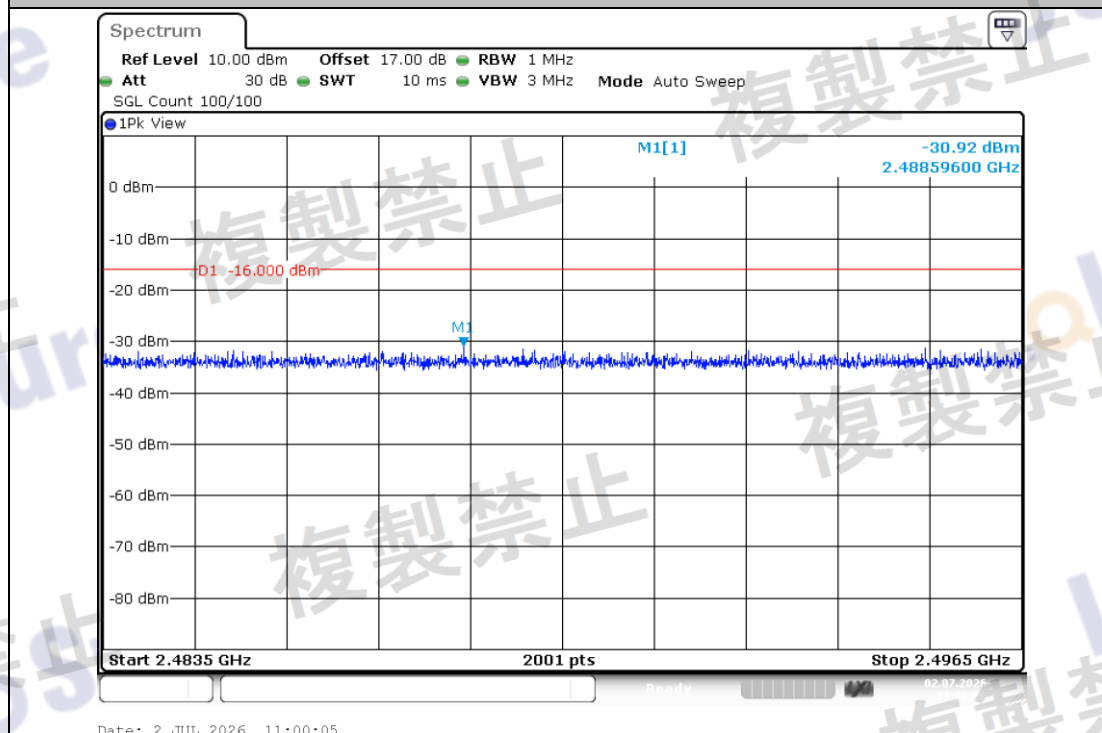


NTNV-11G-Ant1-2442-2496.5~13000-PASS

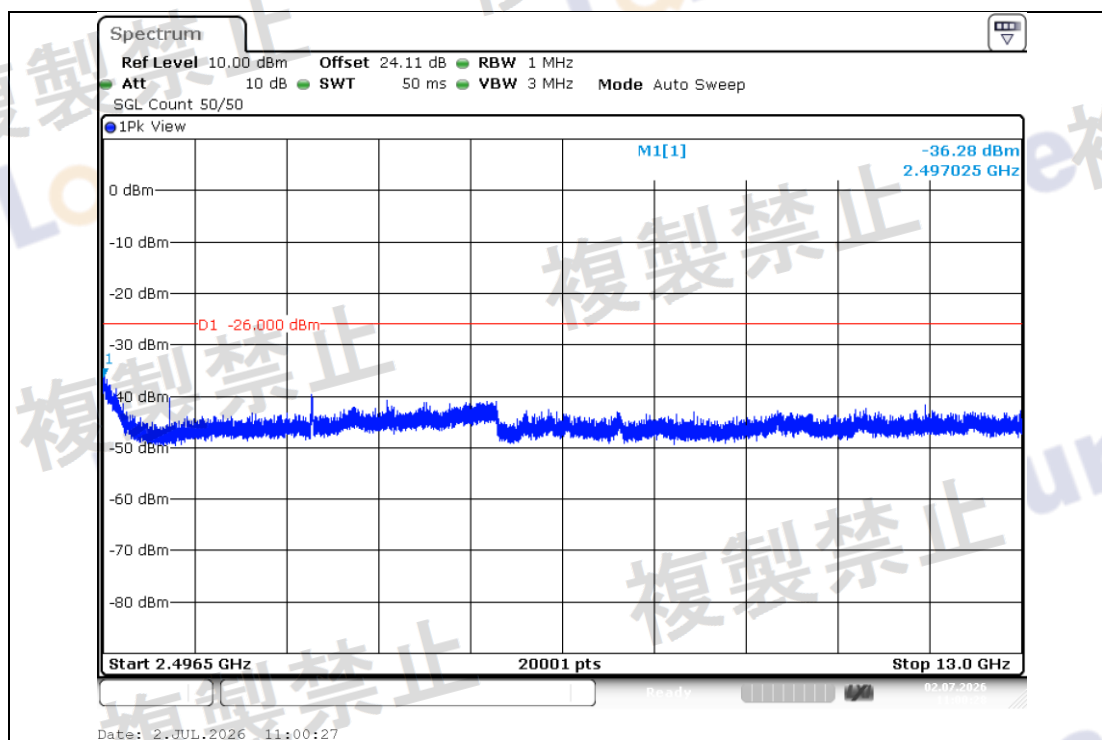


NTNV-11G-Ant1-2472-30~1000-PASS

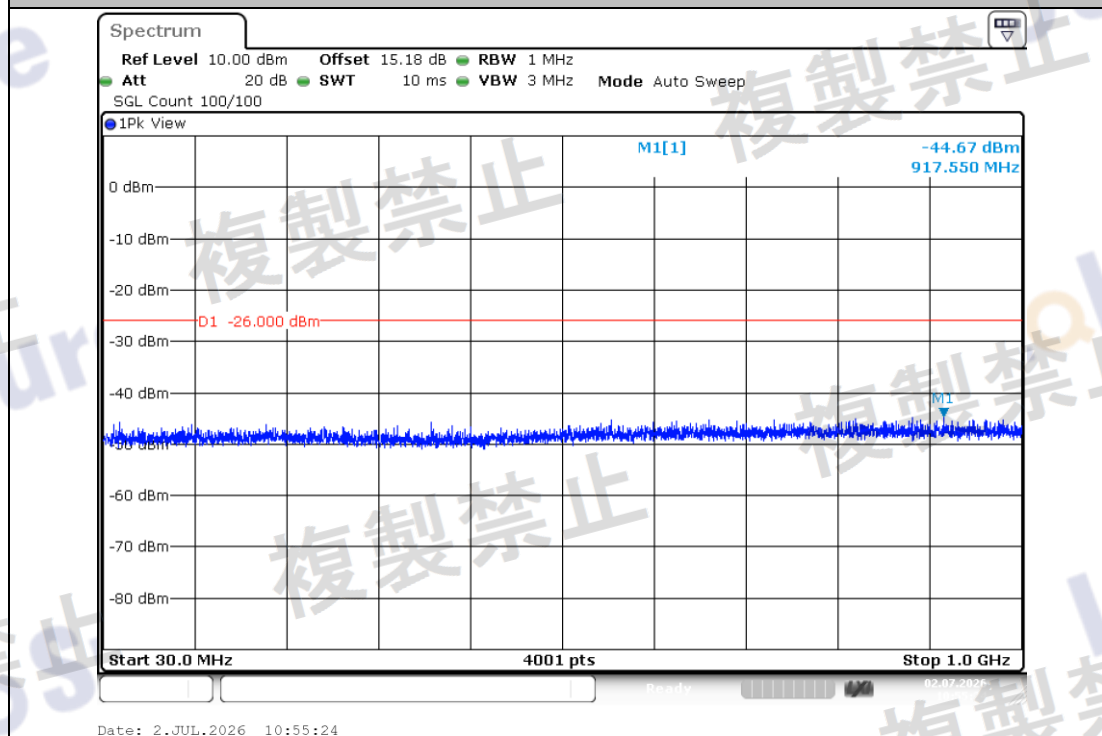


NTNV-11G-Ant1-2472-1000~2387-PASS

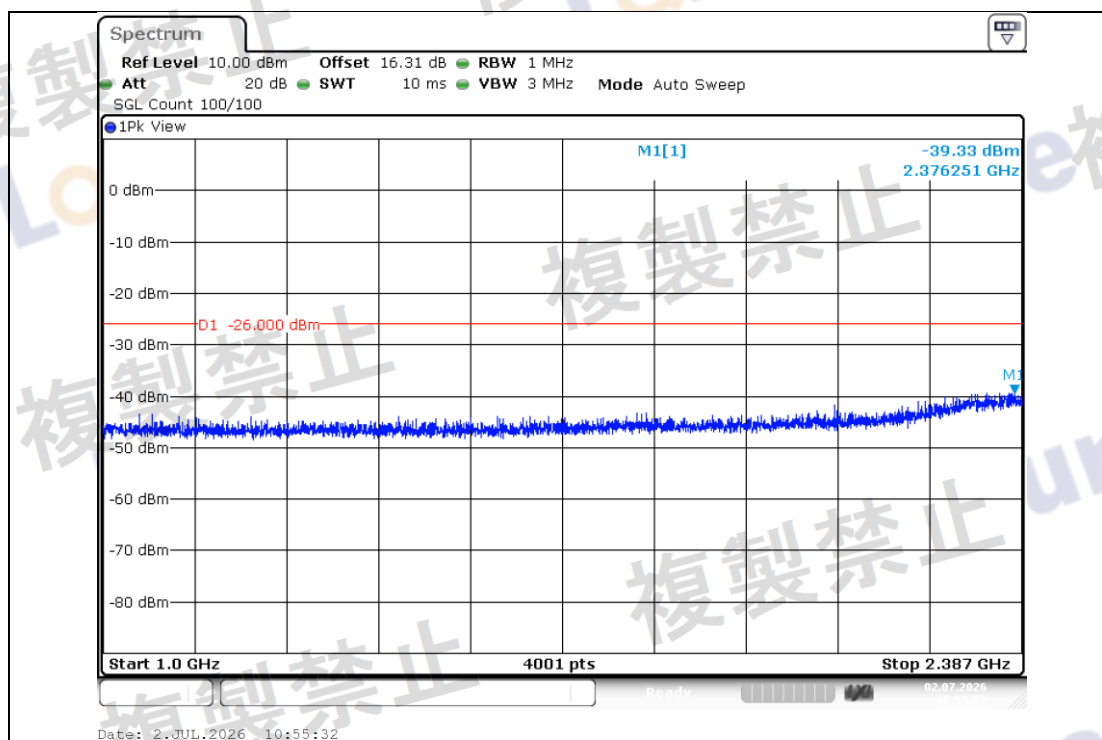


NTNV-11G-Ant1-2472-2387~2400-PASS

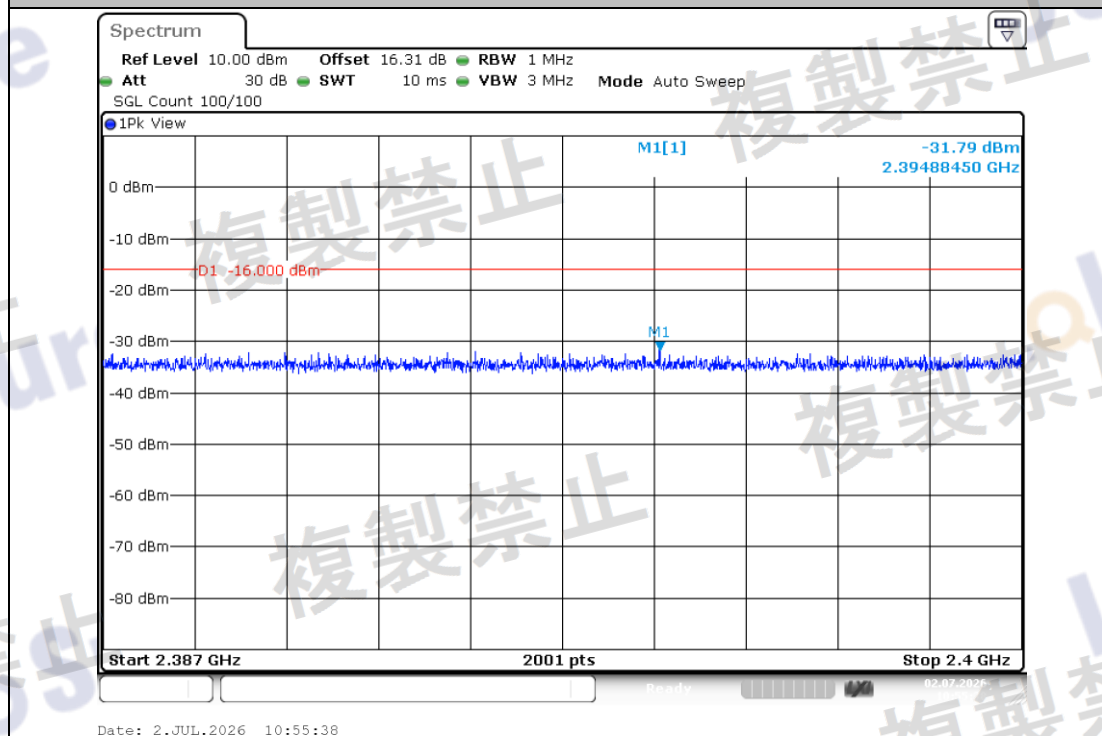


NTNV-11G-Ant1-2472-2483.5~2496.5-See table below

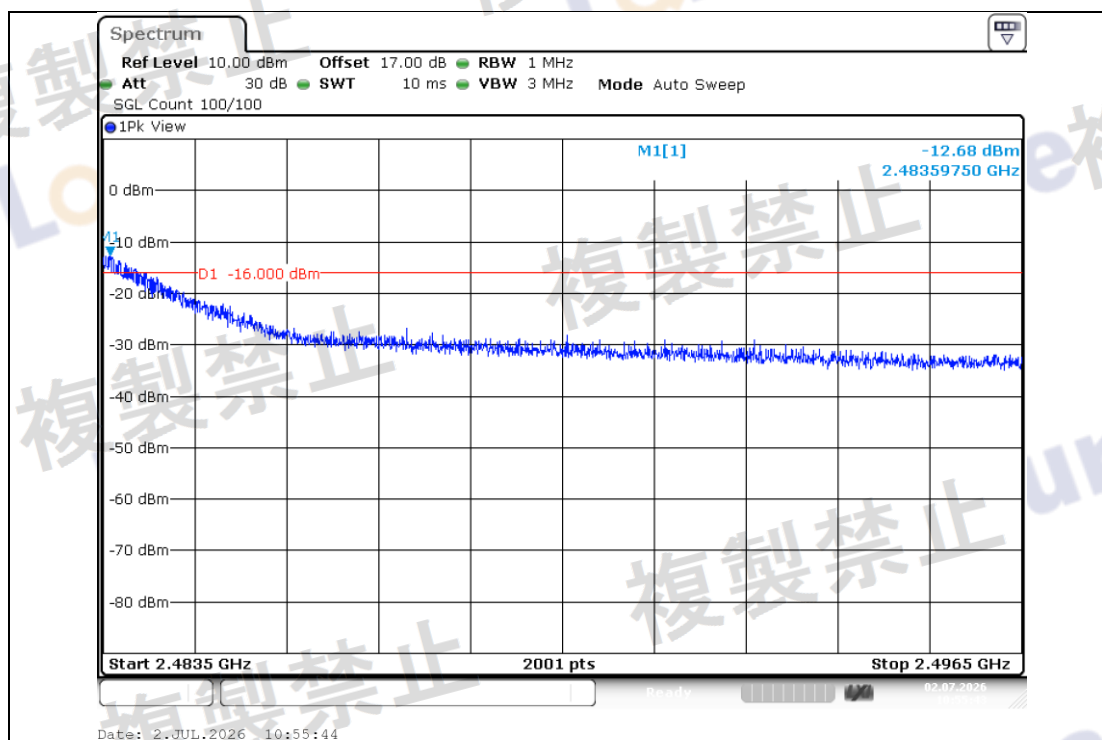


NTNV-11G-Ant1-2472-2496.5~13000-PASS

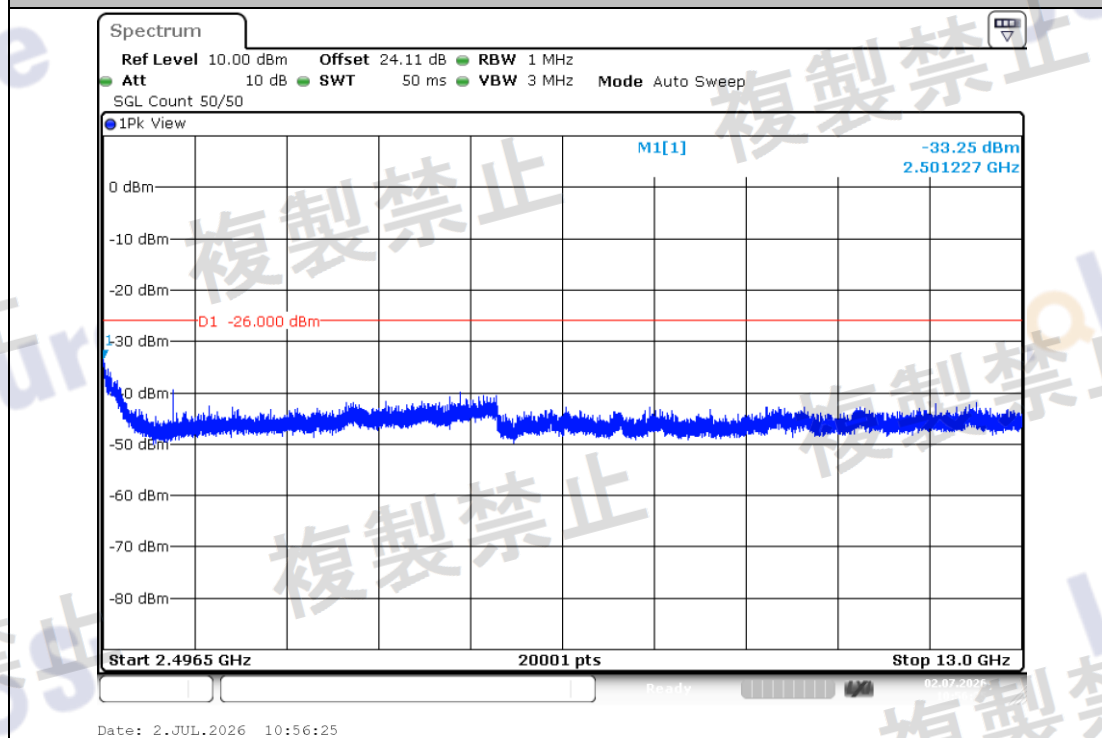


NTNV-11N20-Ant1-2412-30~1000-PASS

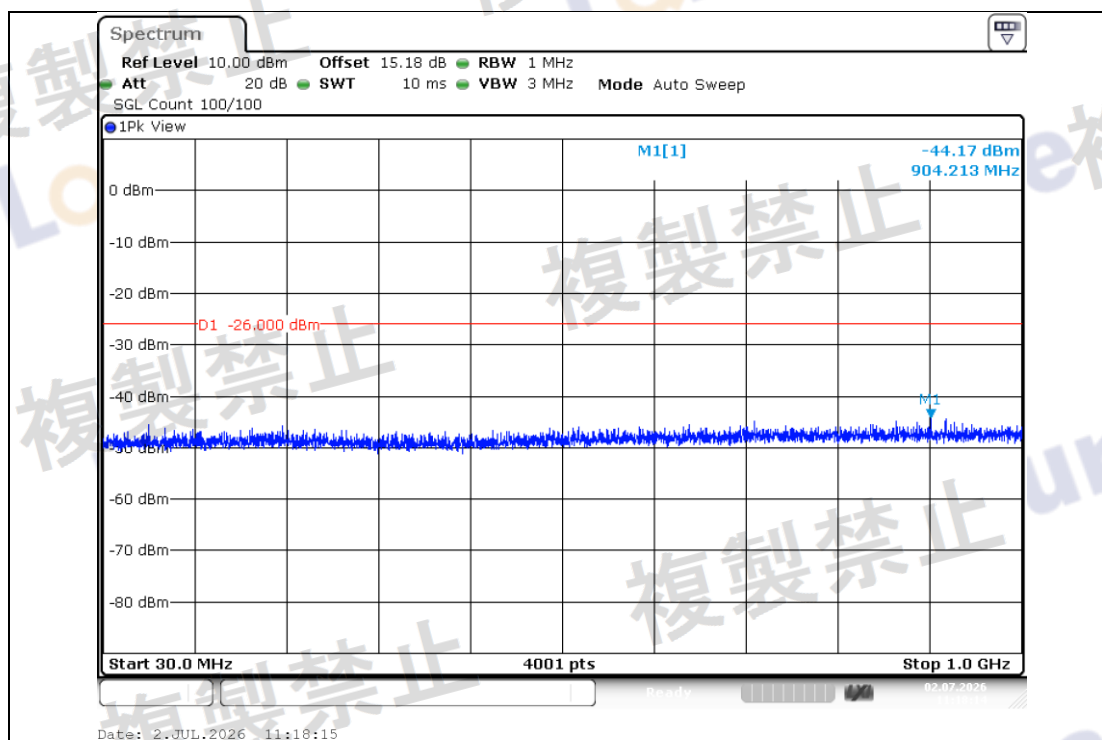


NTNV-11N20-Ant1-2412-1000~2387-PASS

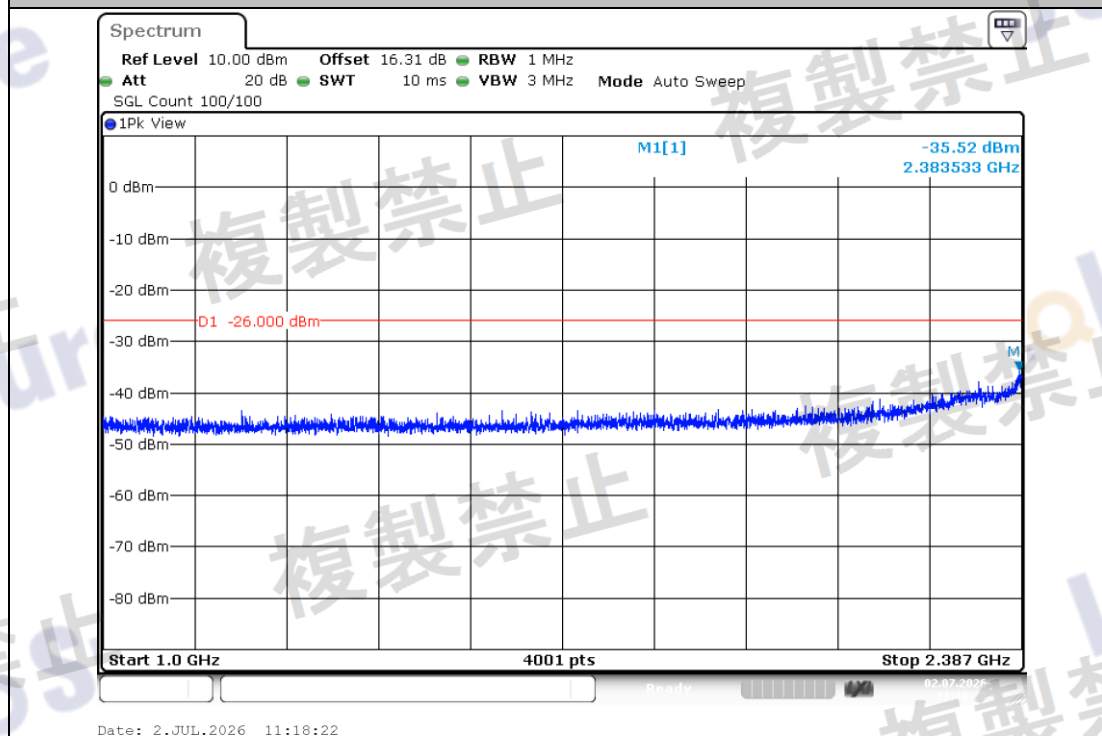


NTNV-11N20-Ant1-2412-2387~2400-See table below

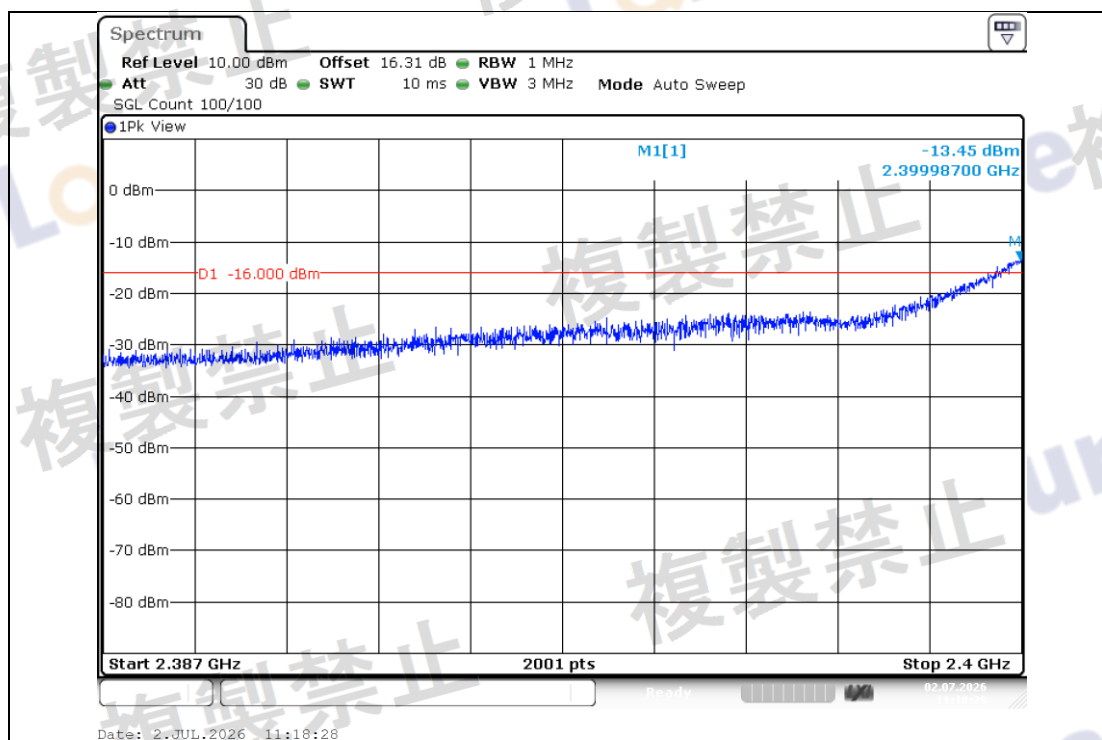


NTNV-11N20-Ant1-2412-2483.5~2496.5-PASS

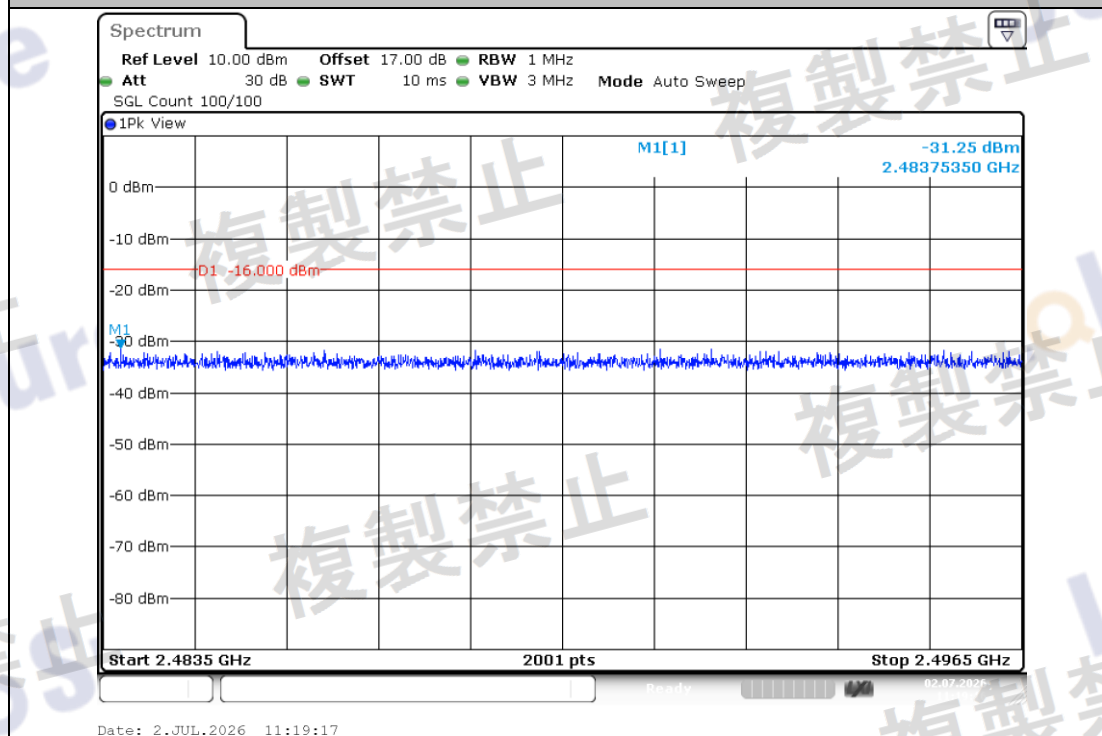


NTNV-11N20-Ant1-2412-2496.5~13000-PASS

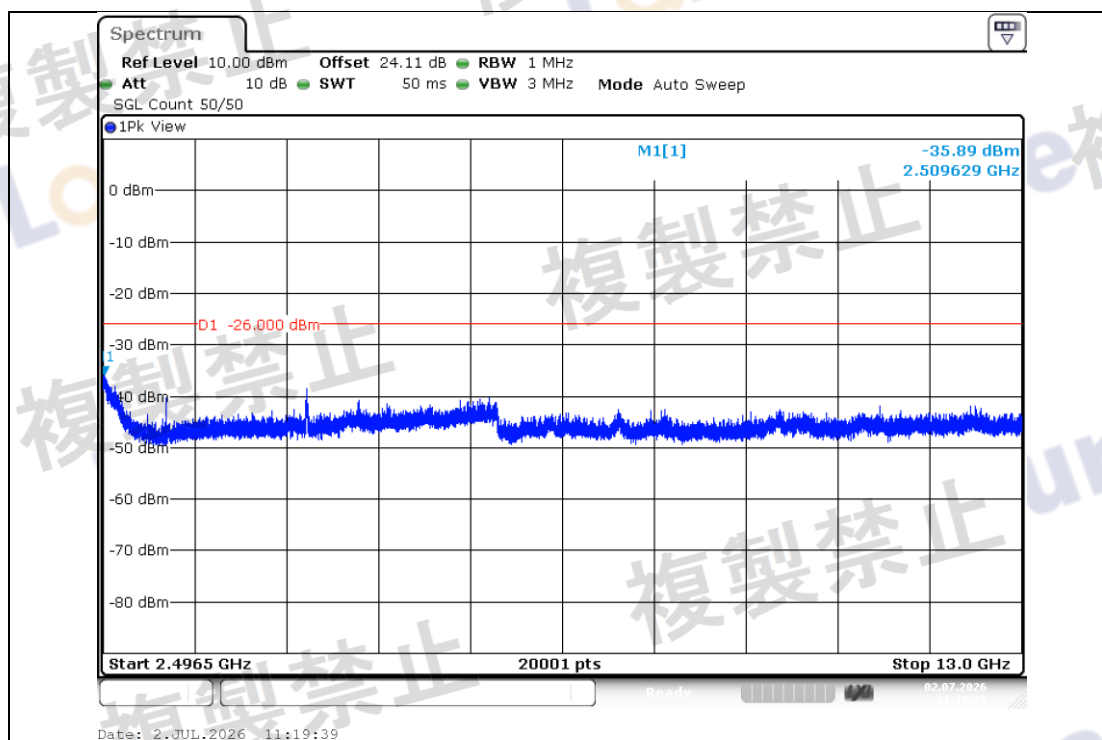


NTNV-11N20-Ant1-2442-30~1000-PASS

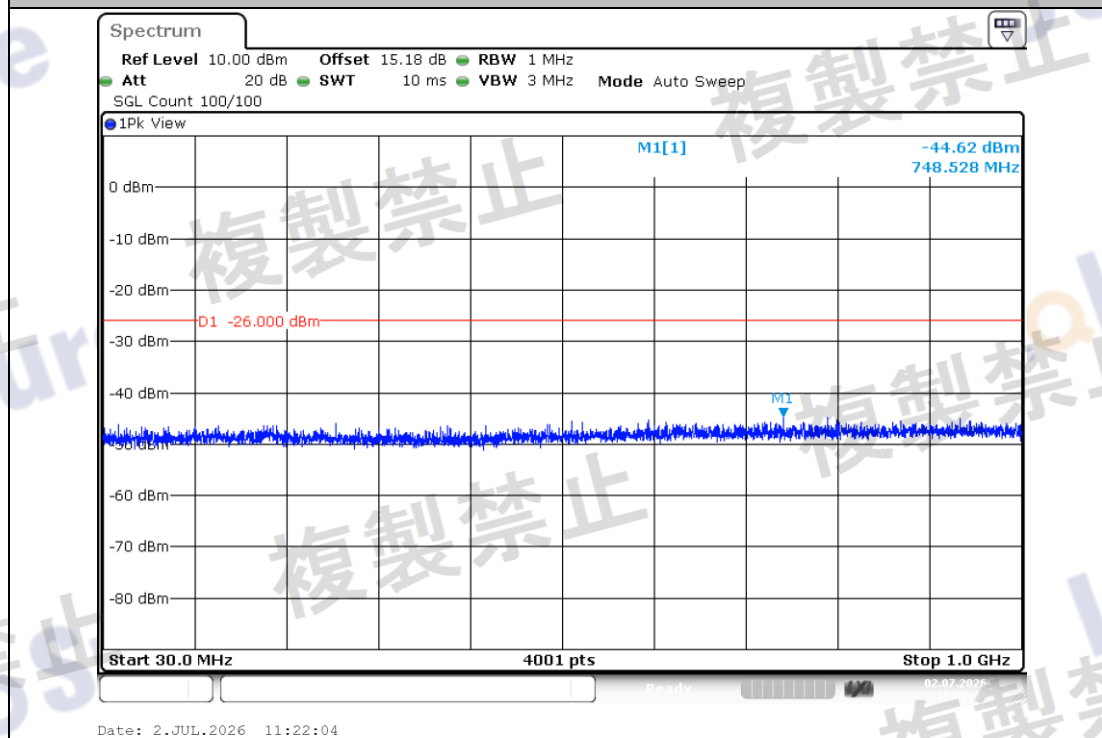


NTNV-11N20-Ant1-2442-1000~2387-PASS

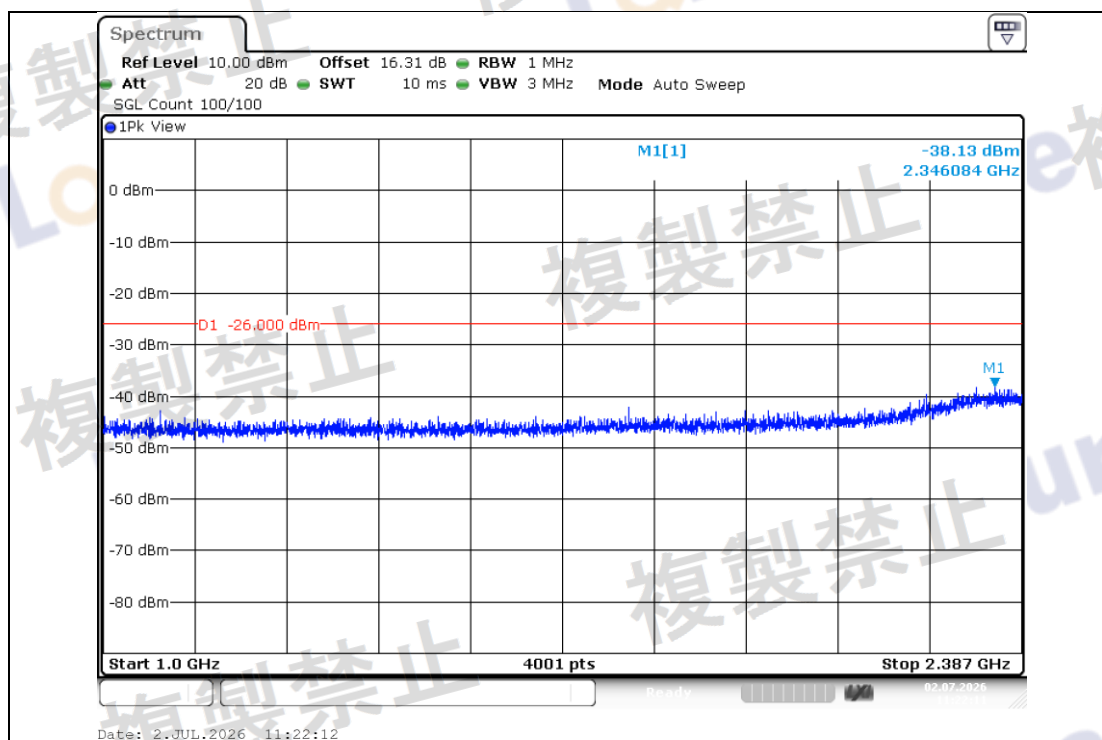


NTNV-11N20-Ant1-2442-2387~2400-PASS

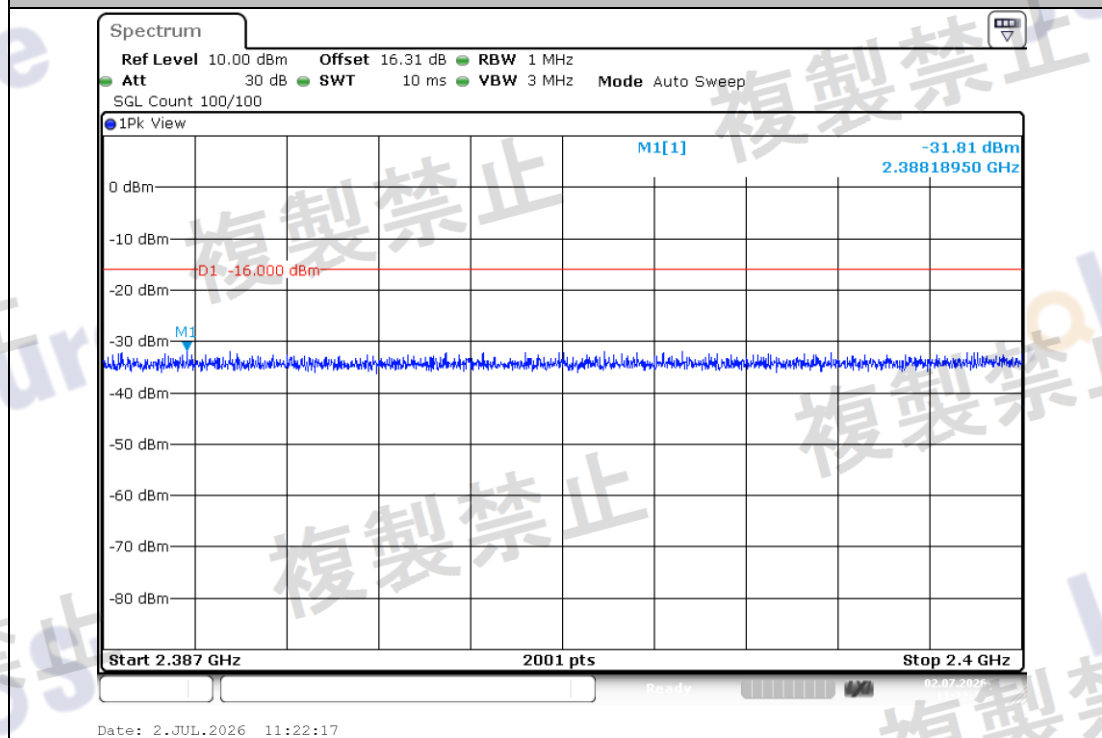


NTNV-11N20-Ant1-2442-2483.5~2496.5-PASS

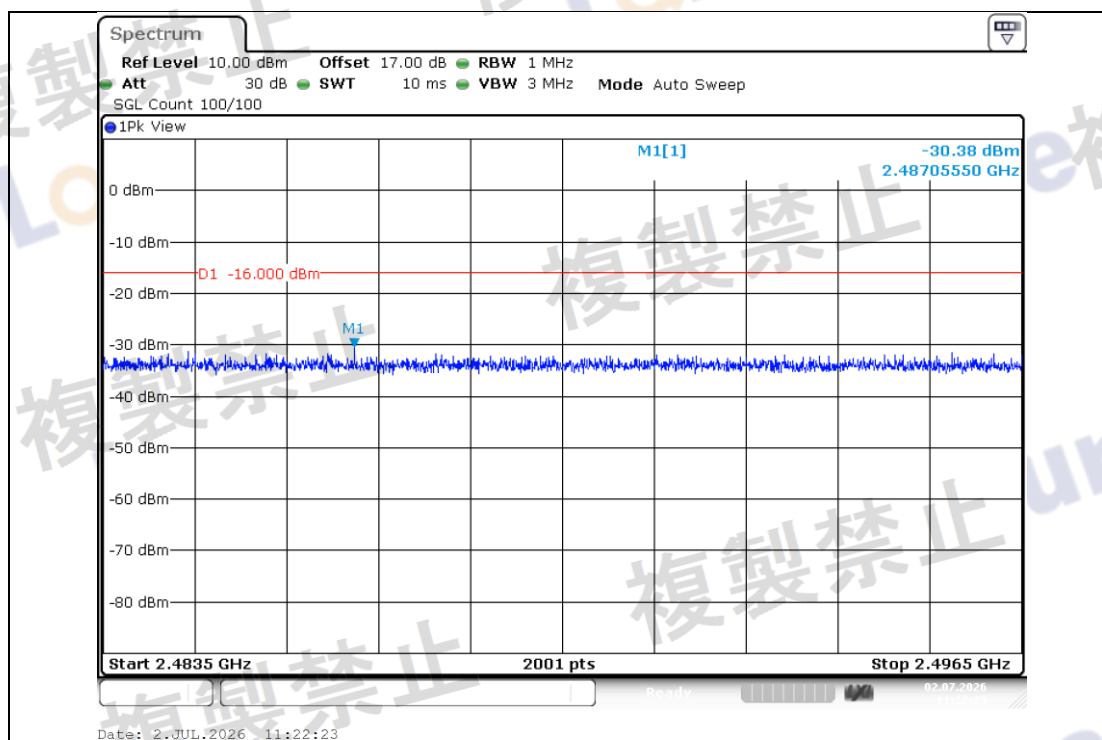


NTNV-11N20-Ant1-2442-2496.5~13000-PASS

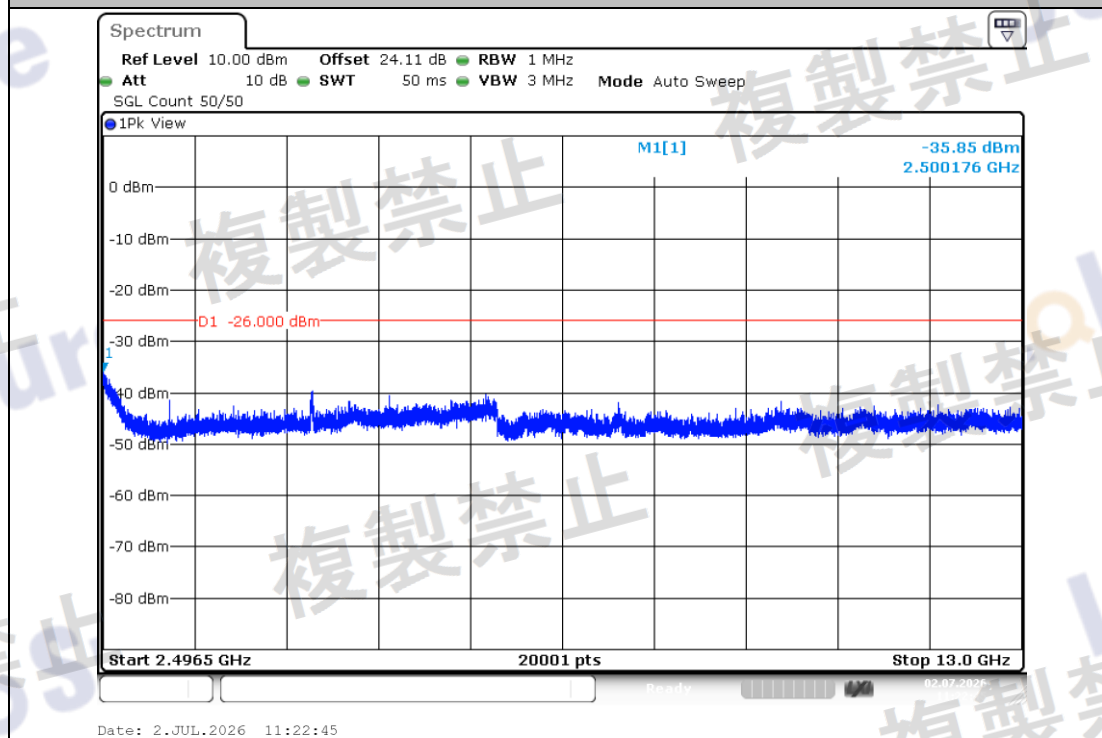


NTNV-11N20-Ant1-2472-30~1000-PASS

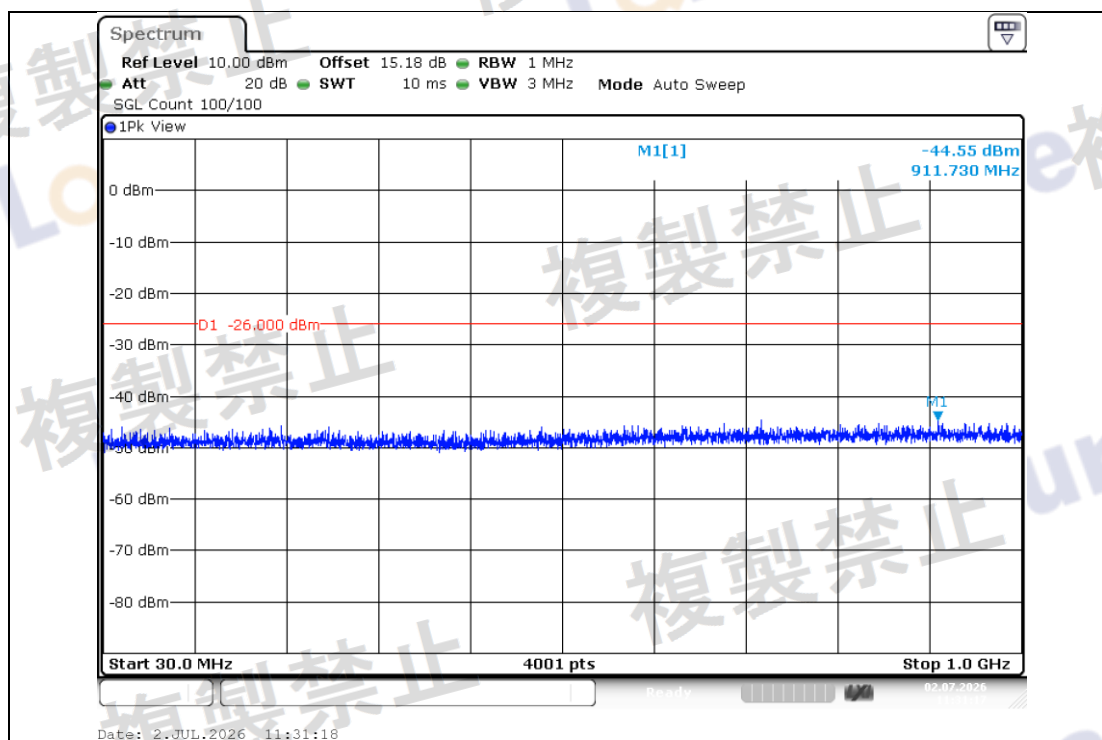


NTNV-11N20-Ant1-2472-1000~2387-PASS

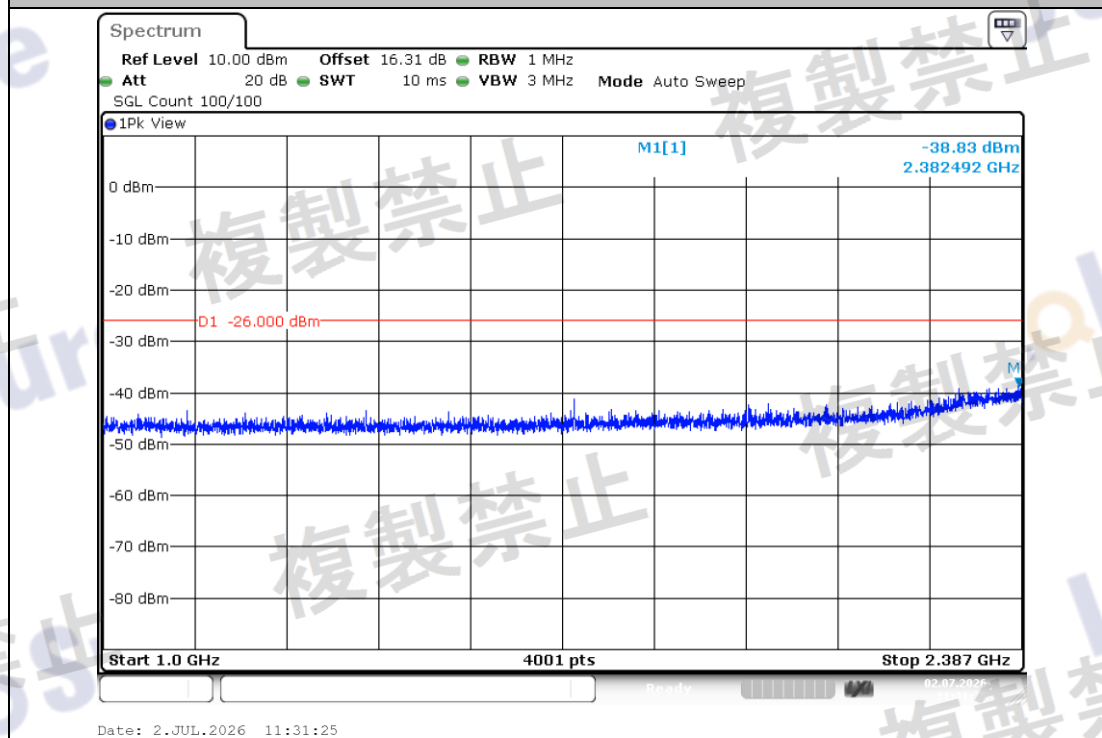


NTNV-11N20-Ant1-2472-2387~2400-PASS

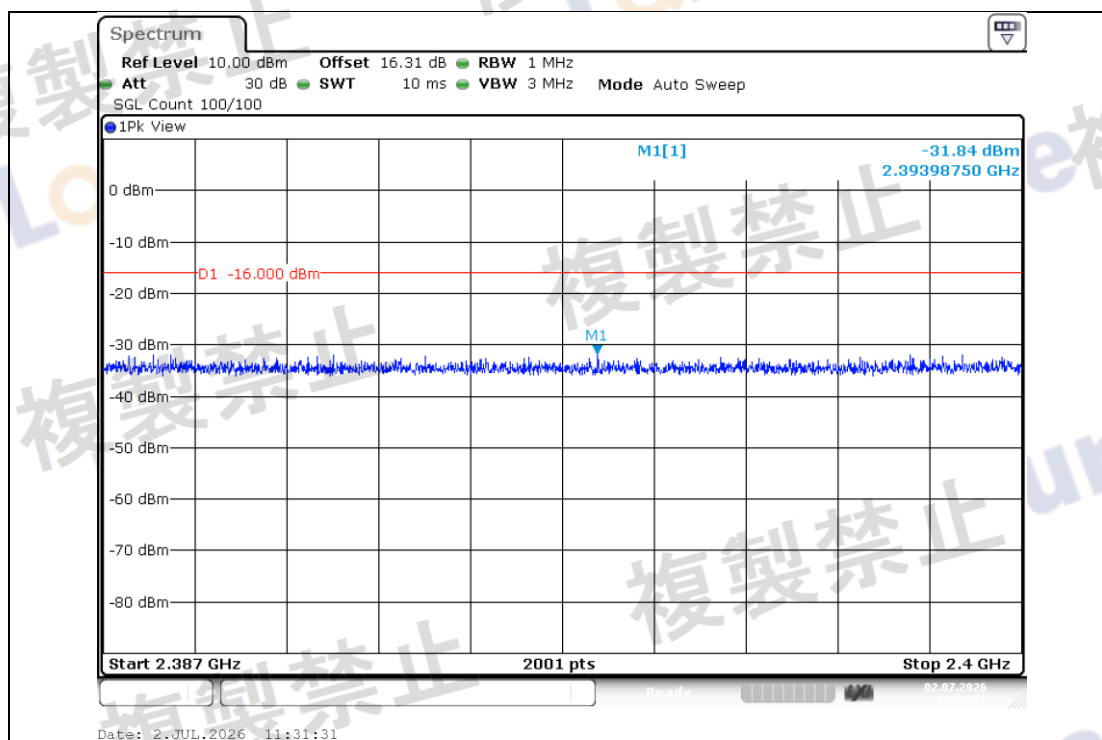


NTNV-11N20-Ant1-2472-2483.5~2496.5-See table below

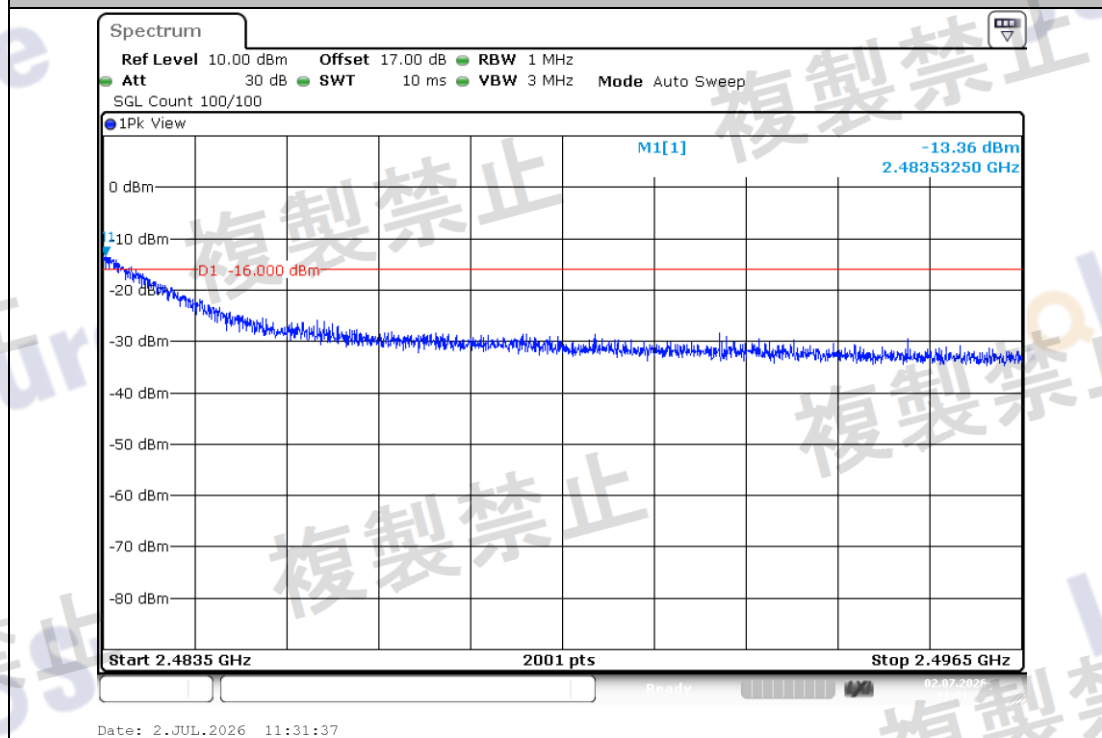


NTNV-11N20-Ant1-2472-2496.5~13000-PASS

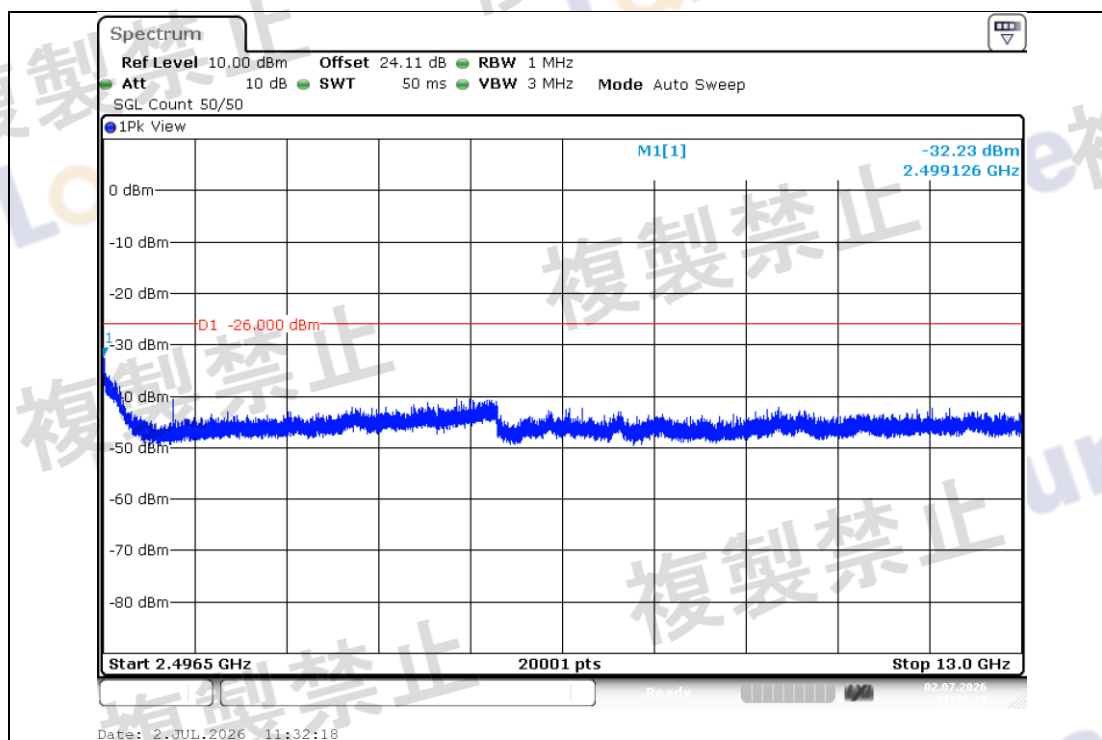


NTNV-11N40-Ant1-2422-30~1000-PASS

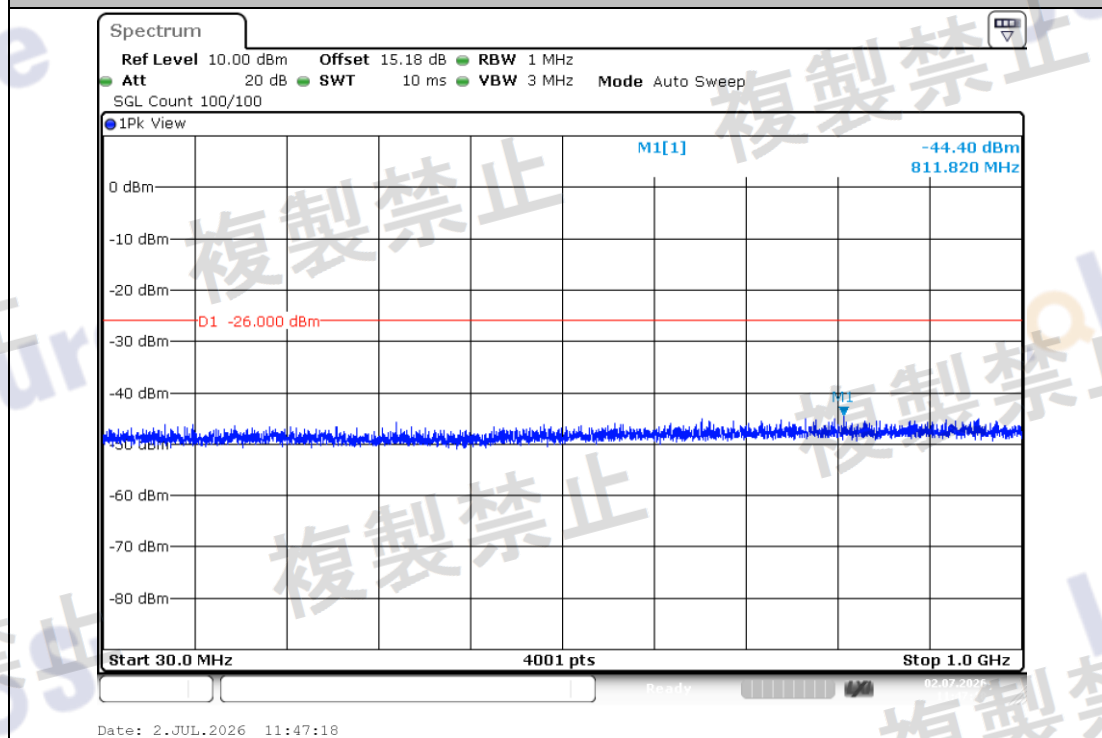


NTNV-11N40-Ant1-2422-1000~2387-PASS

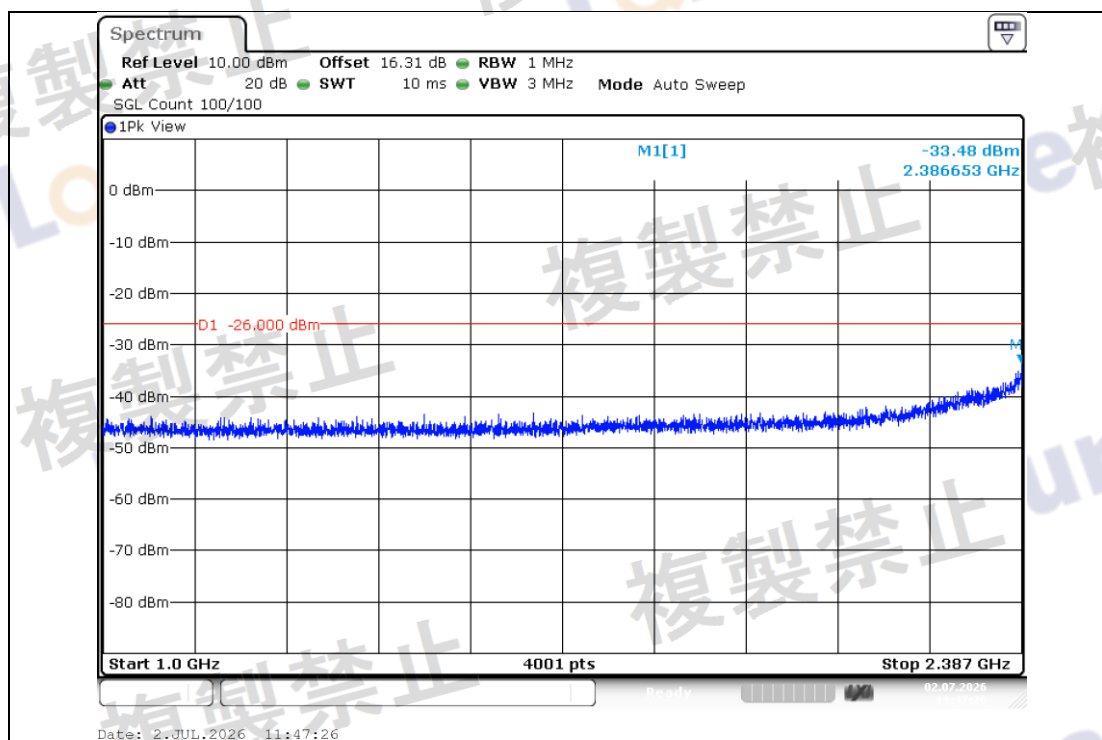


NTNV-11N40-Ant1-2422-2387~2400-See table below

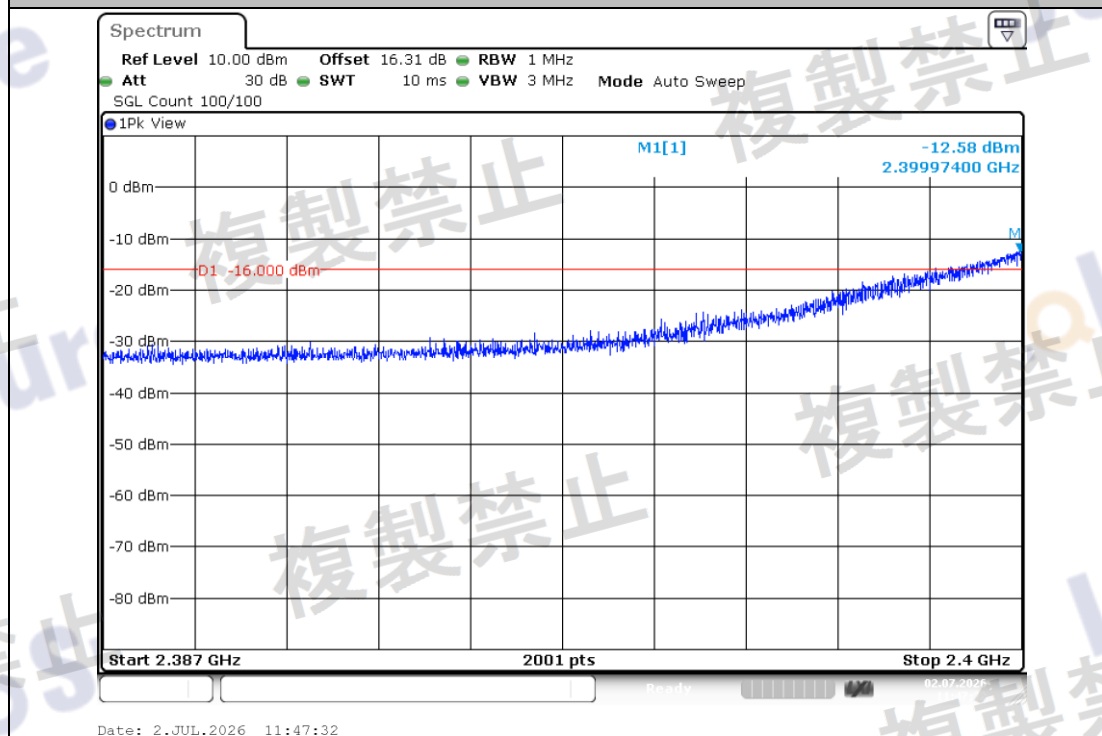


NTNV-11N40-Ant1-2422-2483.5~2496.5-PASS

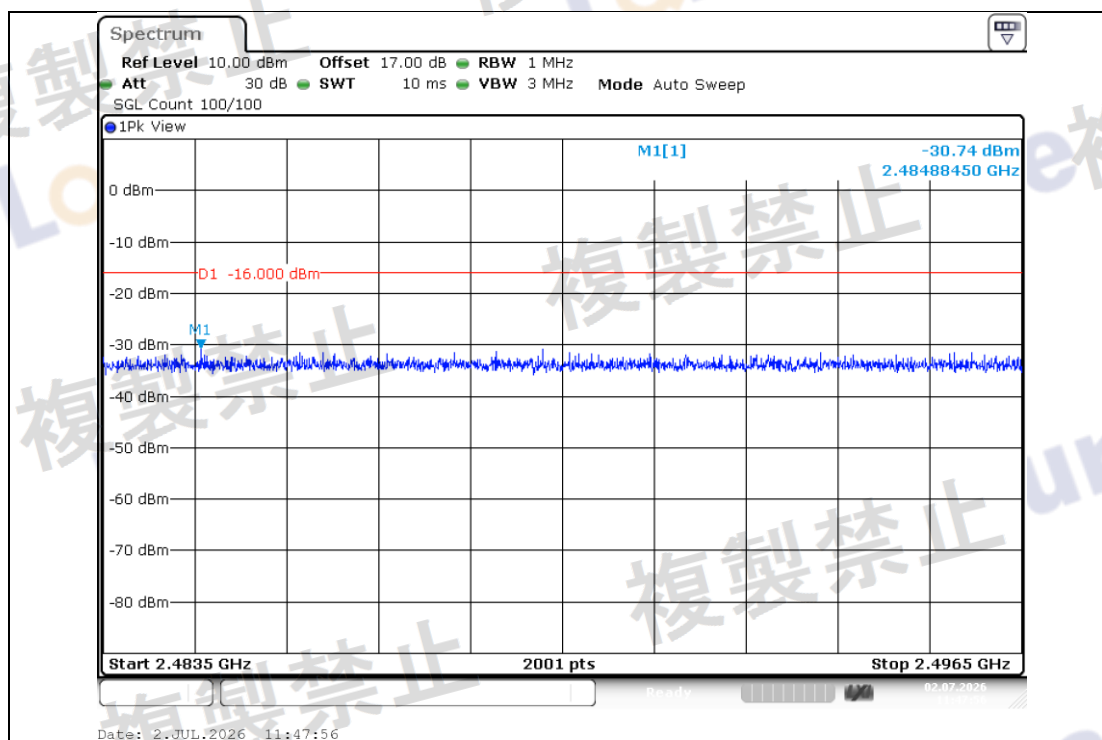


NTNV-11N40-Ant1-2422-2496.5~13000-PASS

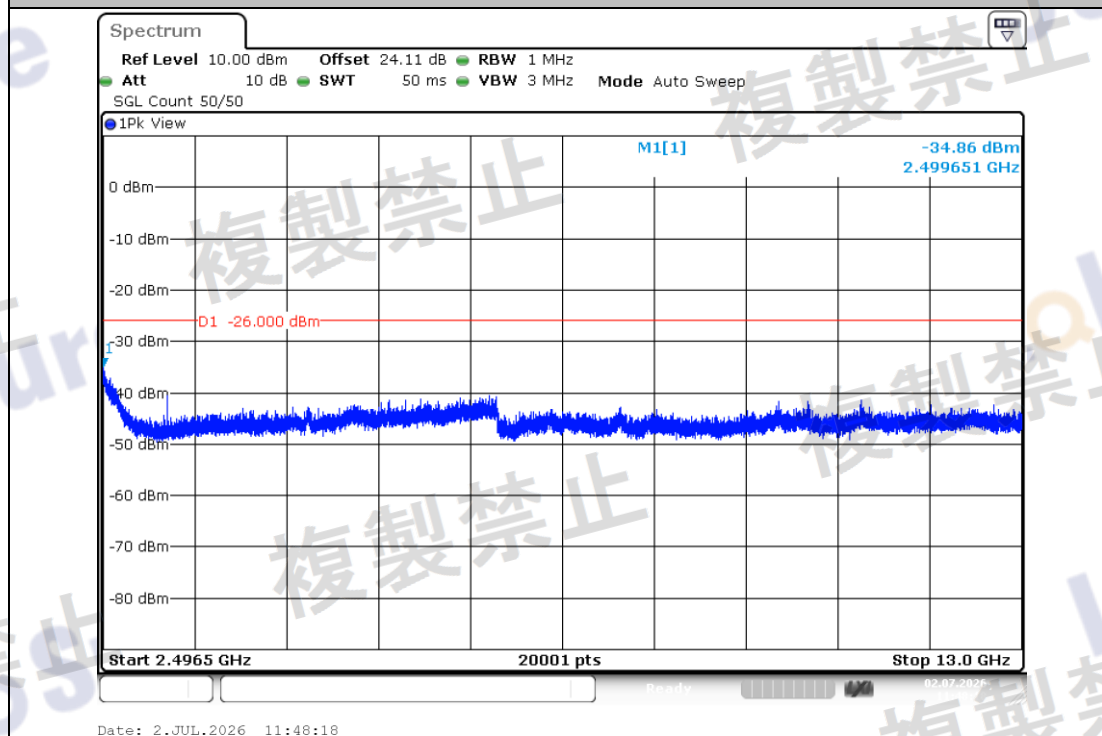


NTNV-11N40-Ant1-2442-30~1000-PASS

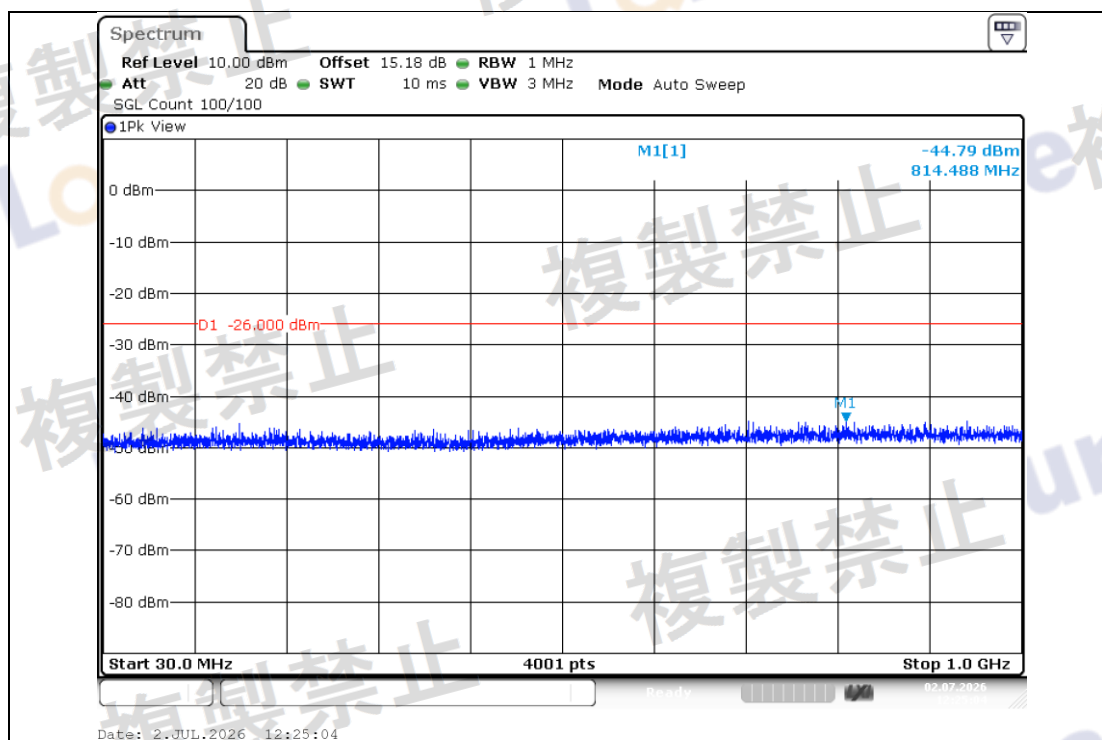


NTNV-11N40-Ant1-2442-1000~2387-PASS

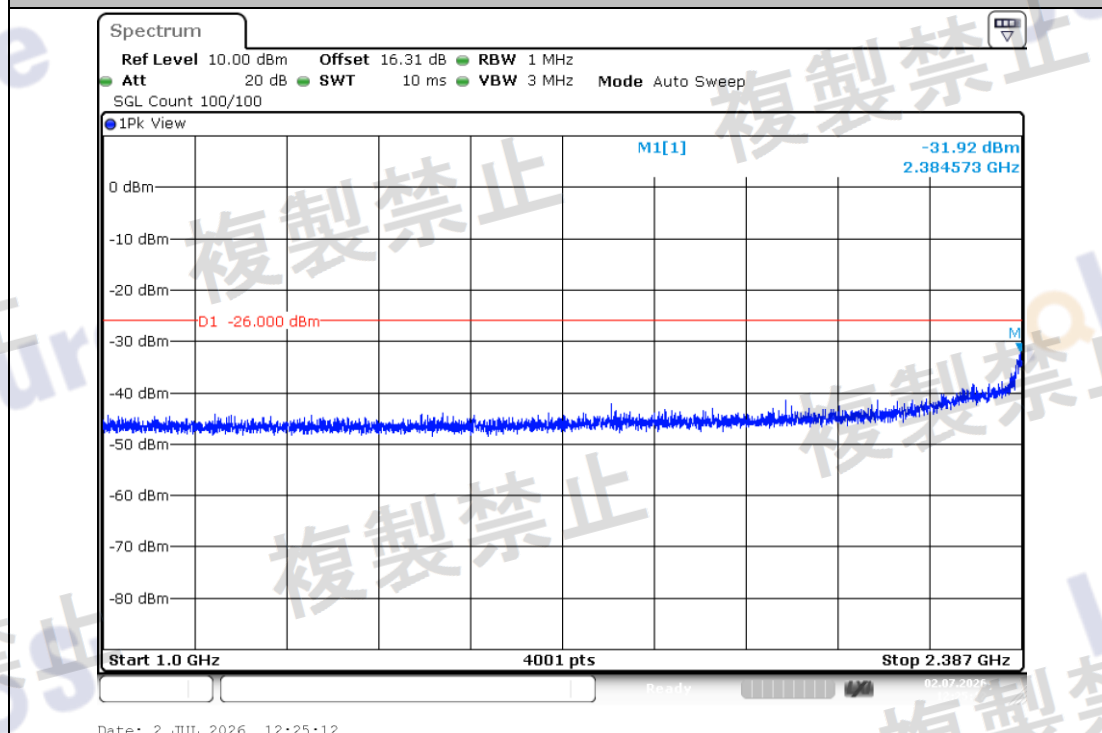


NTNV-11N40-Ant1-2442-2387~2400-PASS

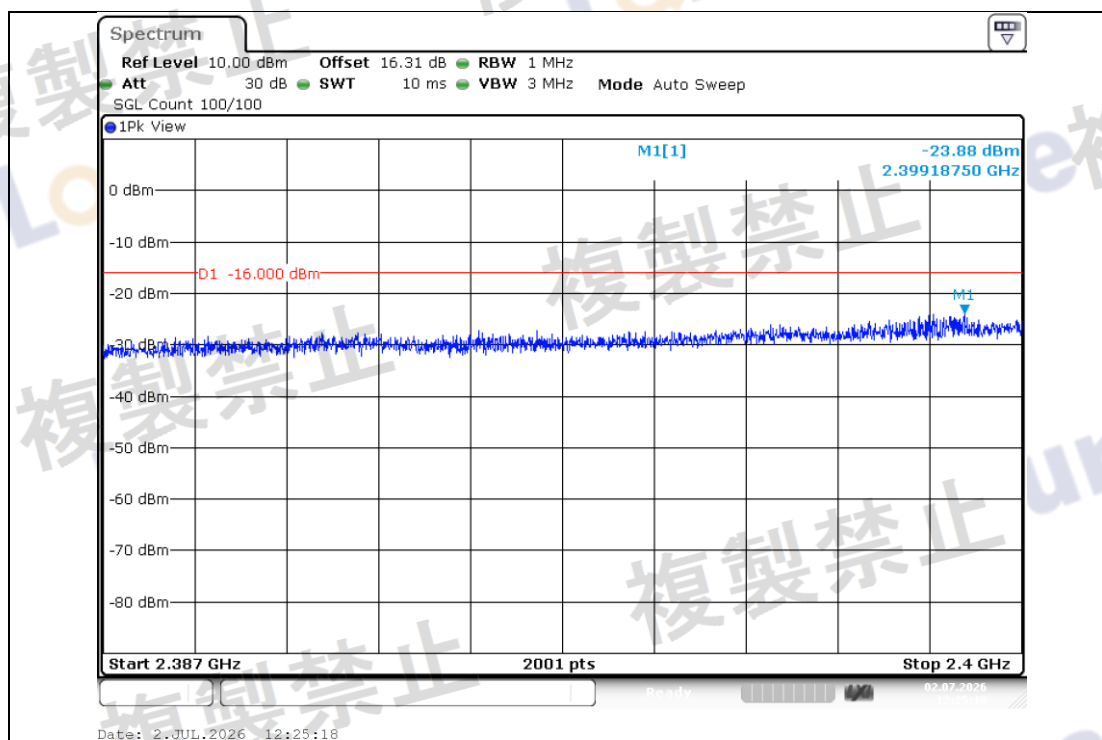


NTNV-11N40-Ant1-2442-2483.5~2496.5-PASS

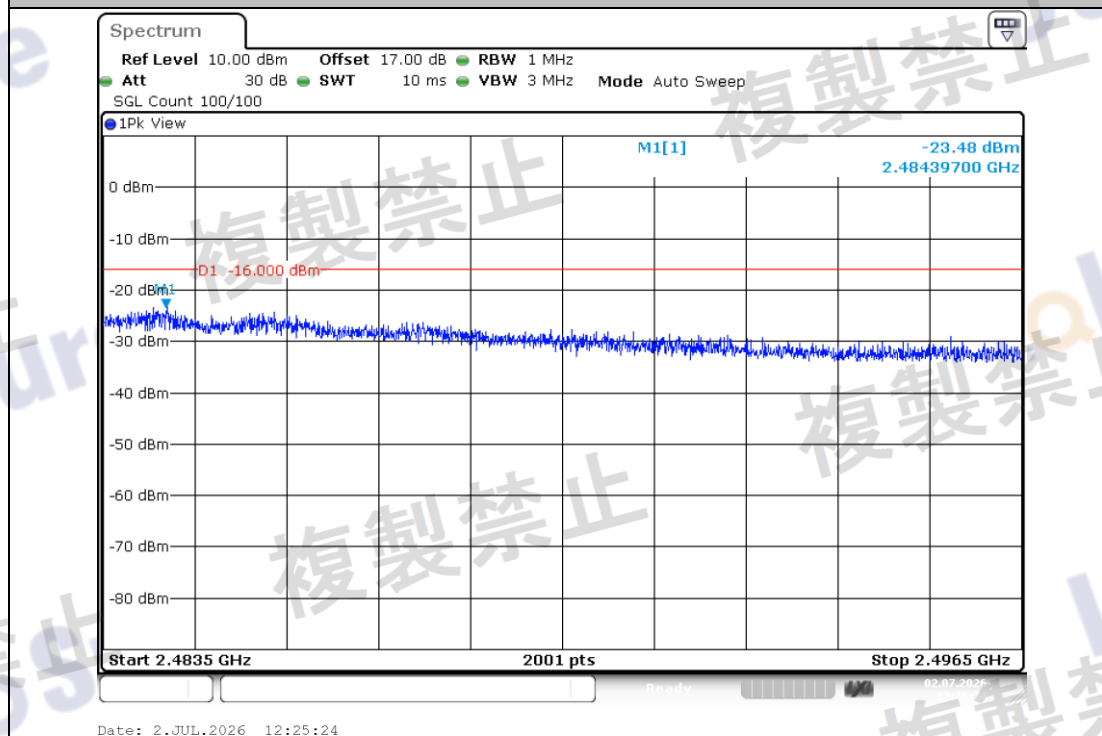


NTNV-11N40-Ant1-2442-2496.5~13000-PASS

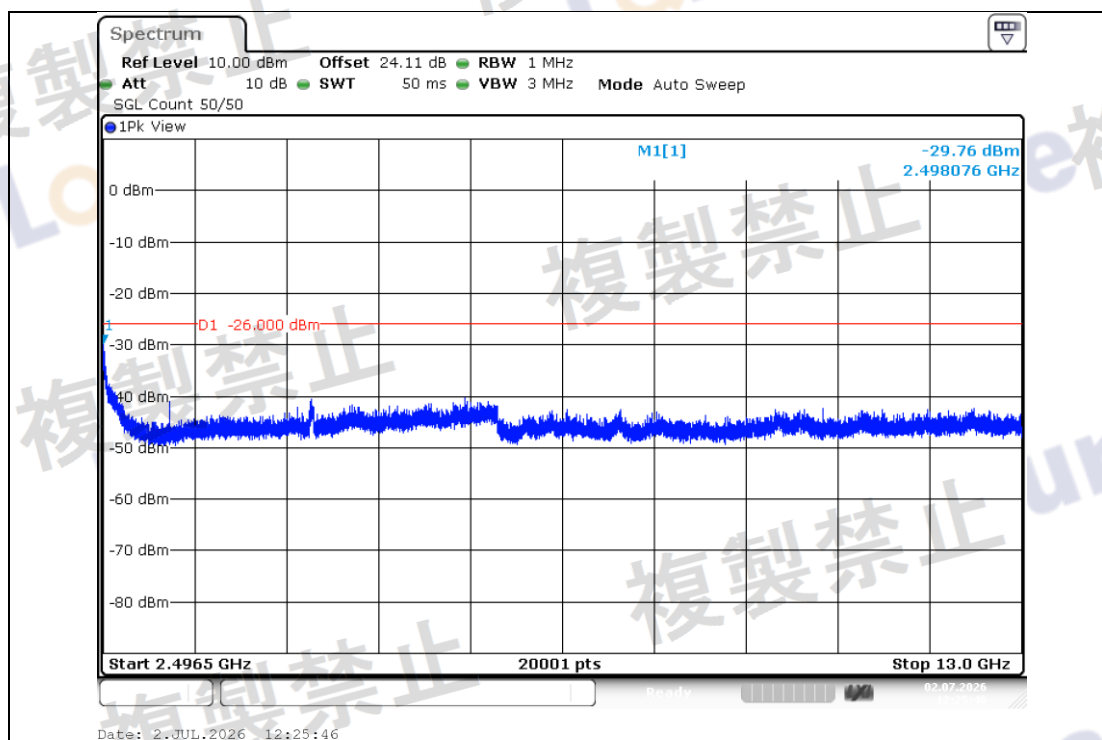


NTNV-11N40-Ant1-2462-30~1000-PASS

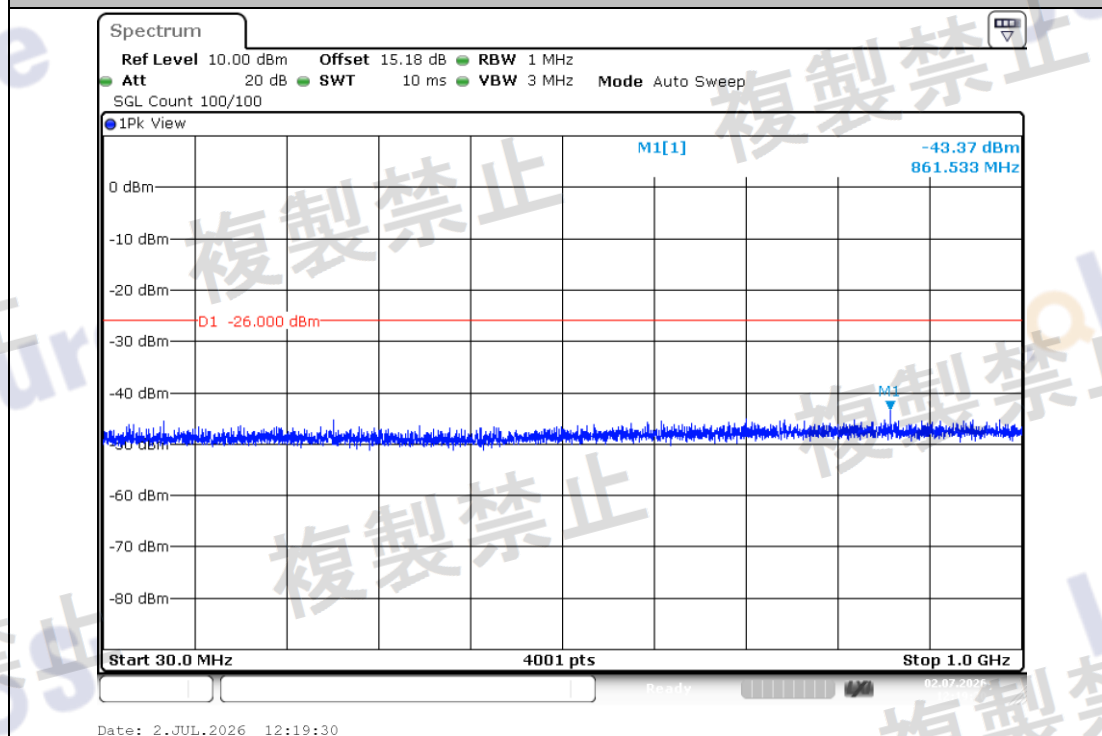


NTNV-11N40-Ant1-2462-1000~2387-PASS

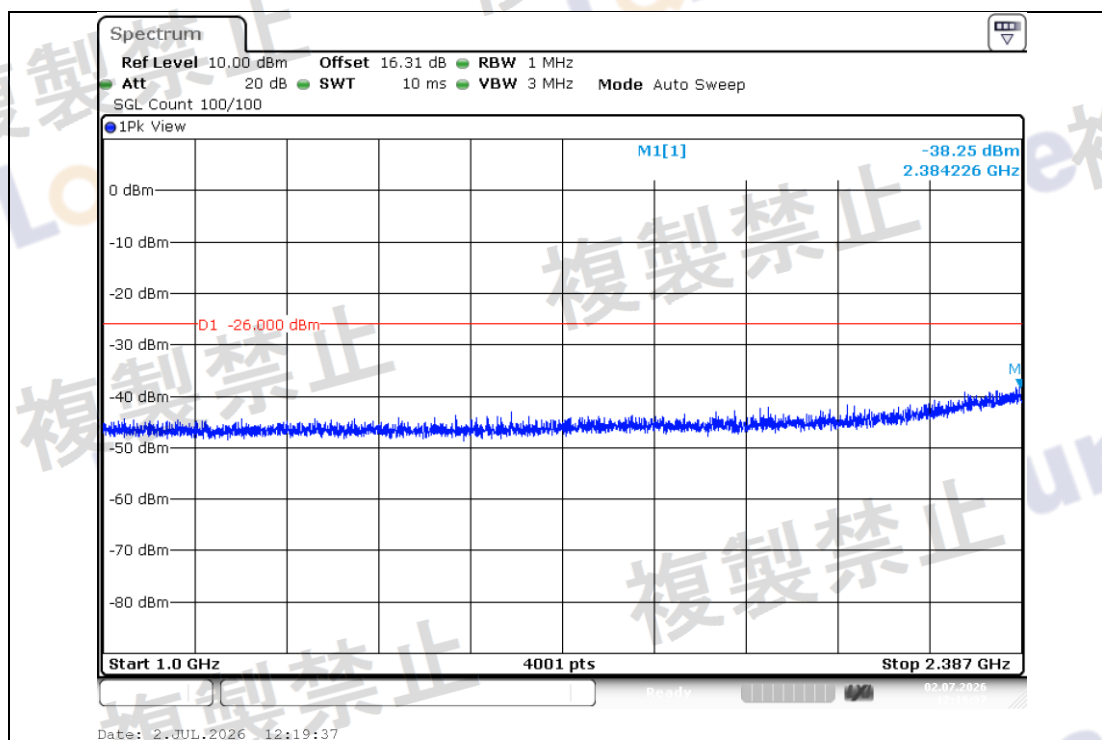


NTNV-11N40-Ant1-2462-2387~2400-PASS

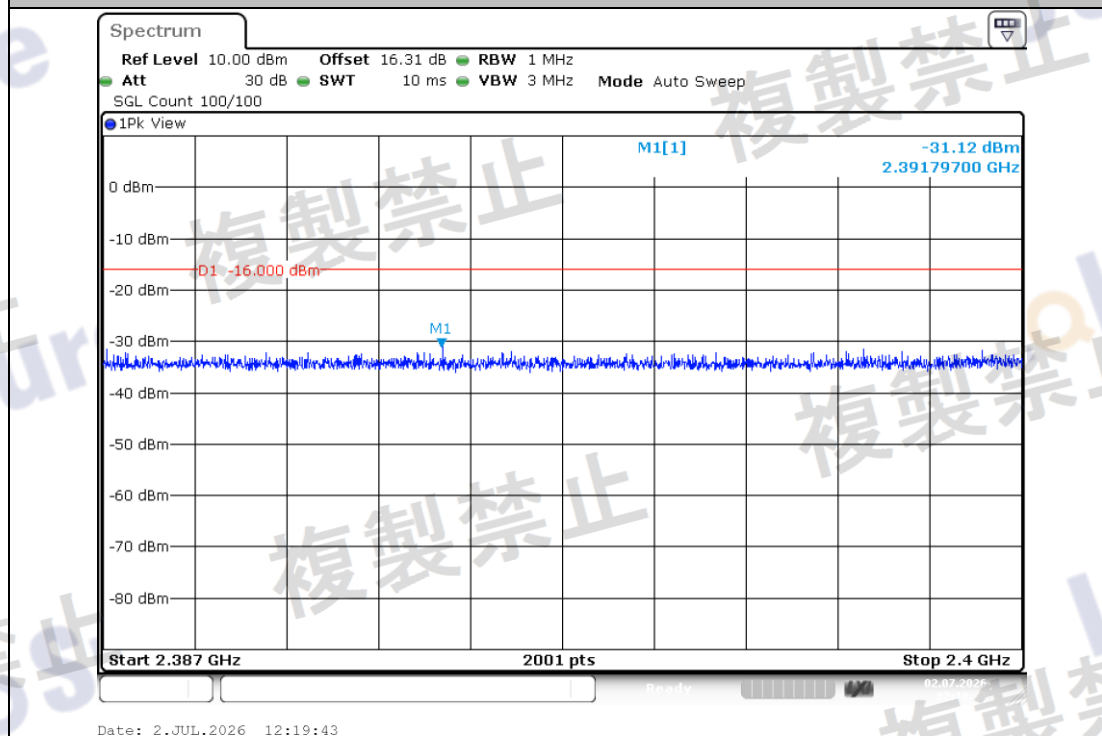


NTNV-11N40-Ant1-2462-2483.5~2496.5-See table below

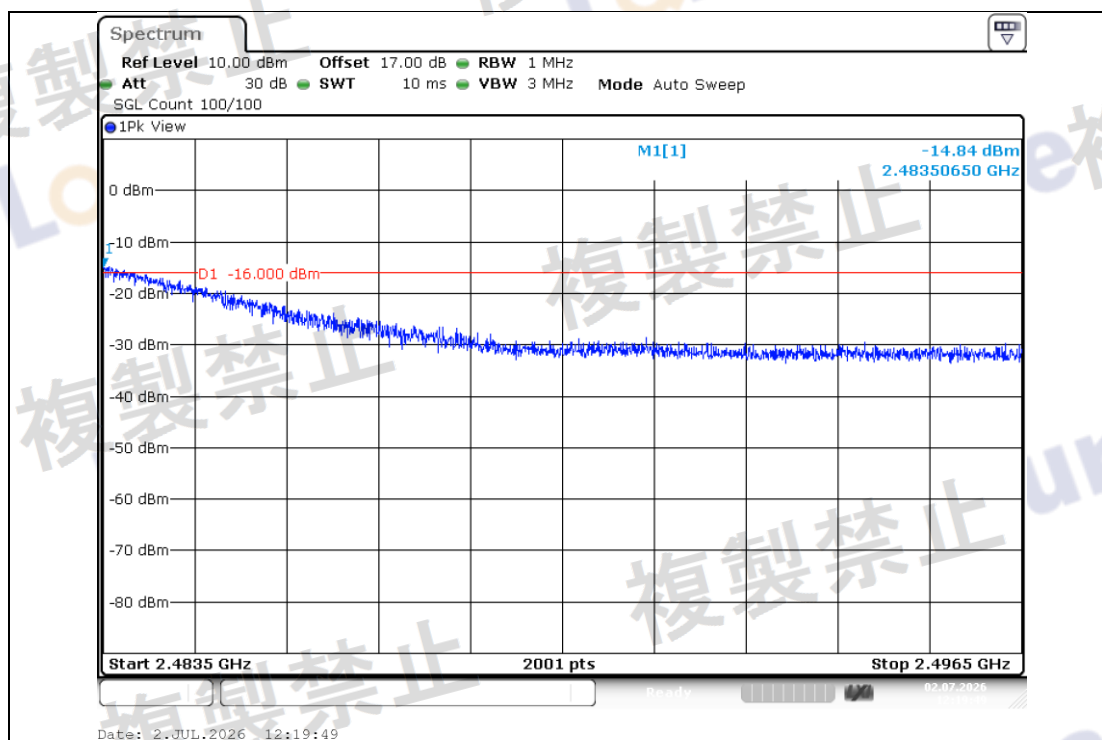



NTNV-11N40-Ant1-2462-2496.5~13000-See table below

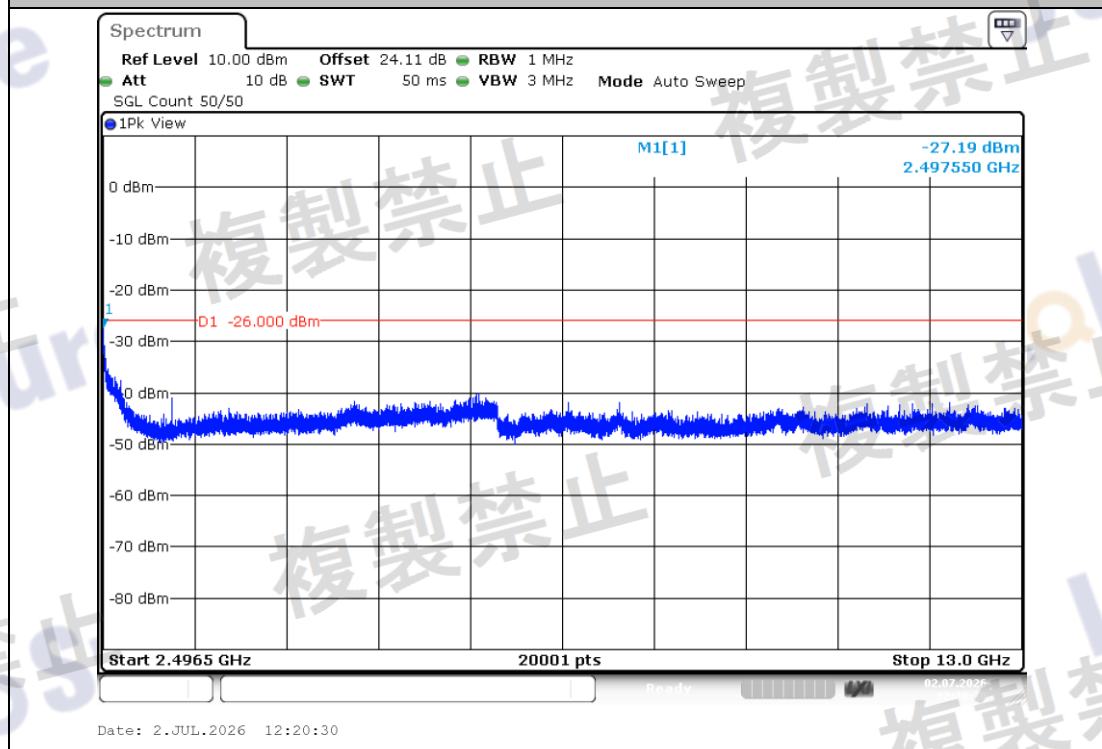



Test Graphs_Step2

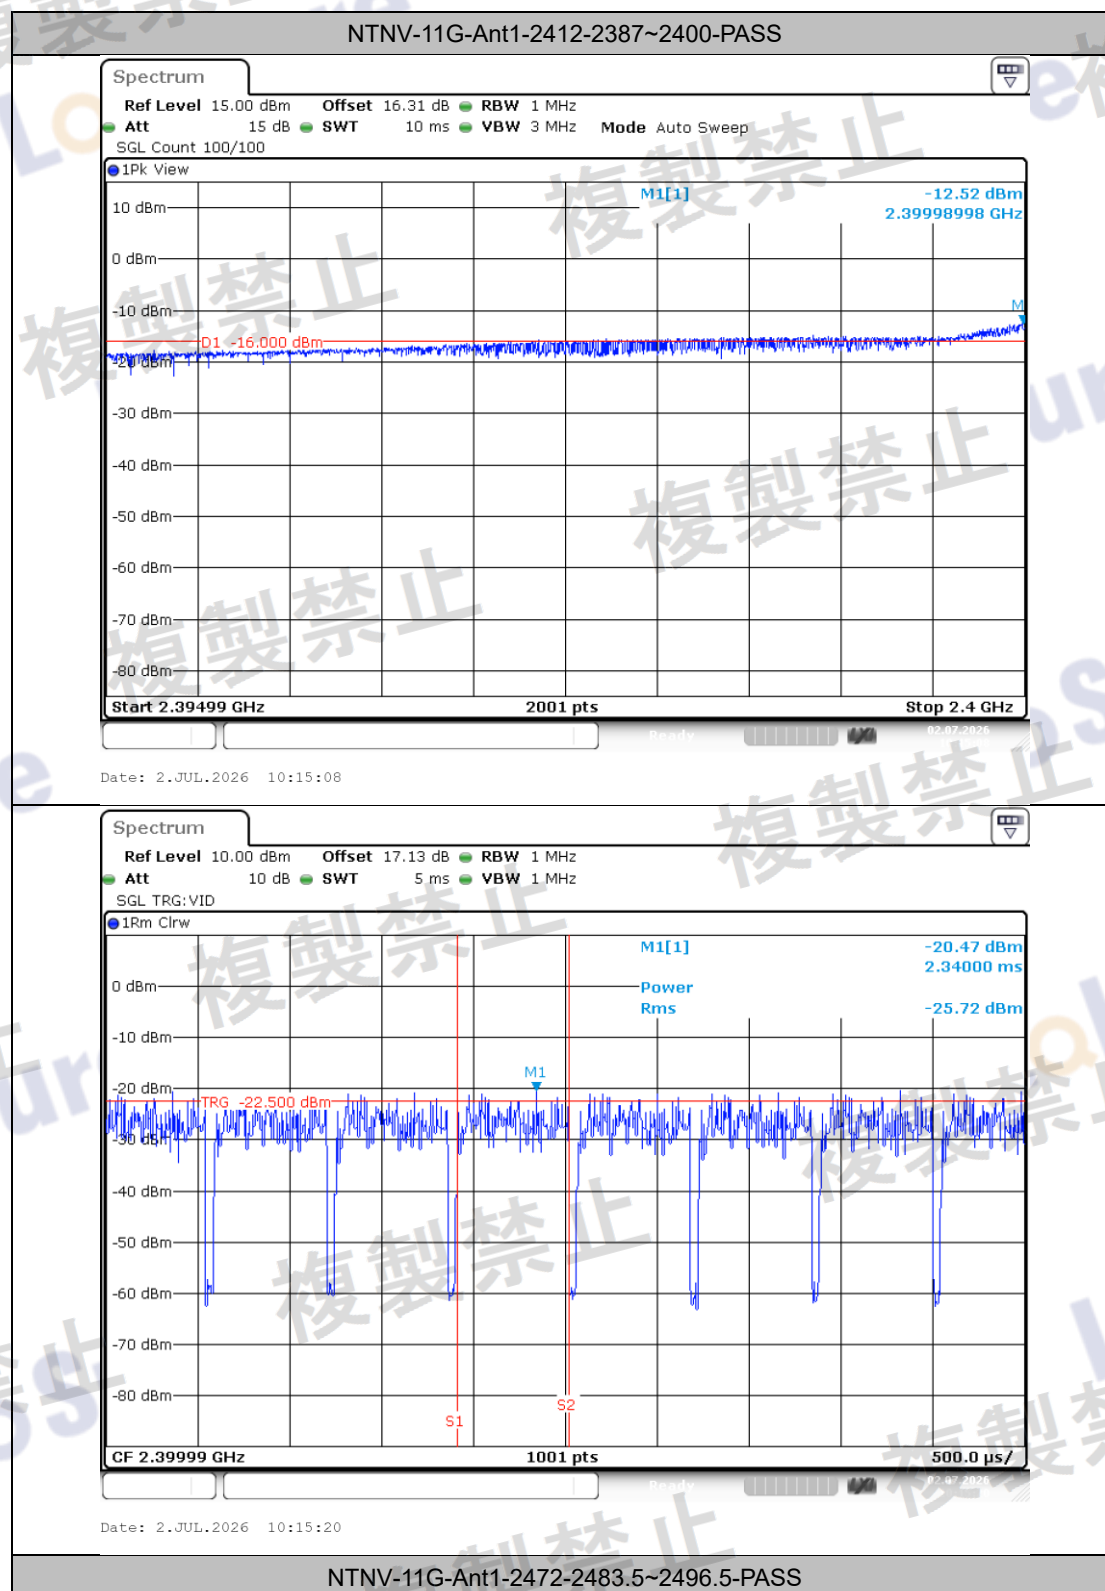


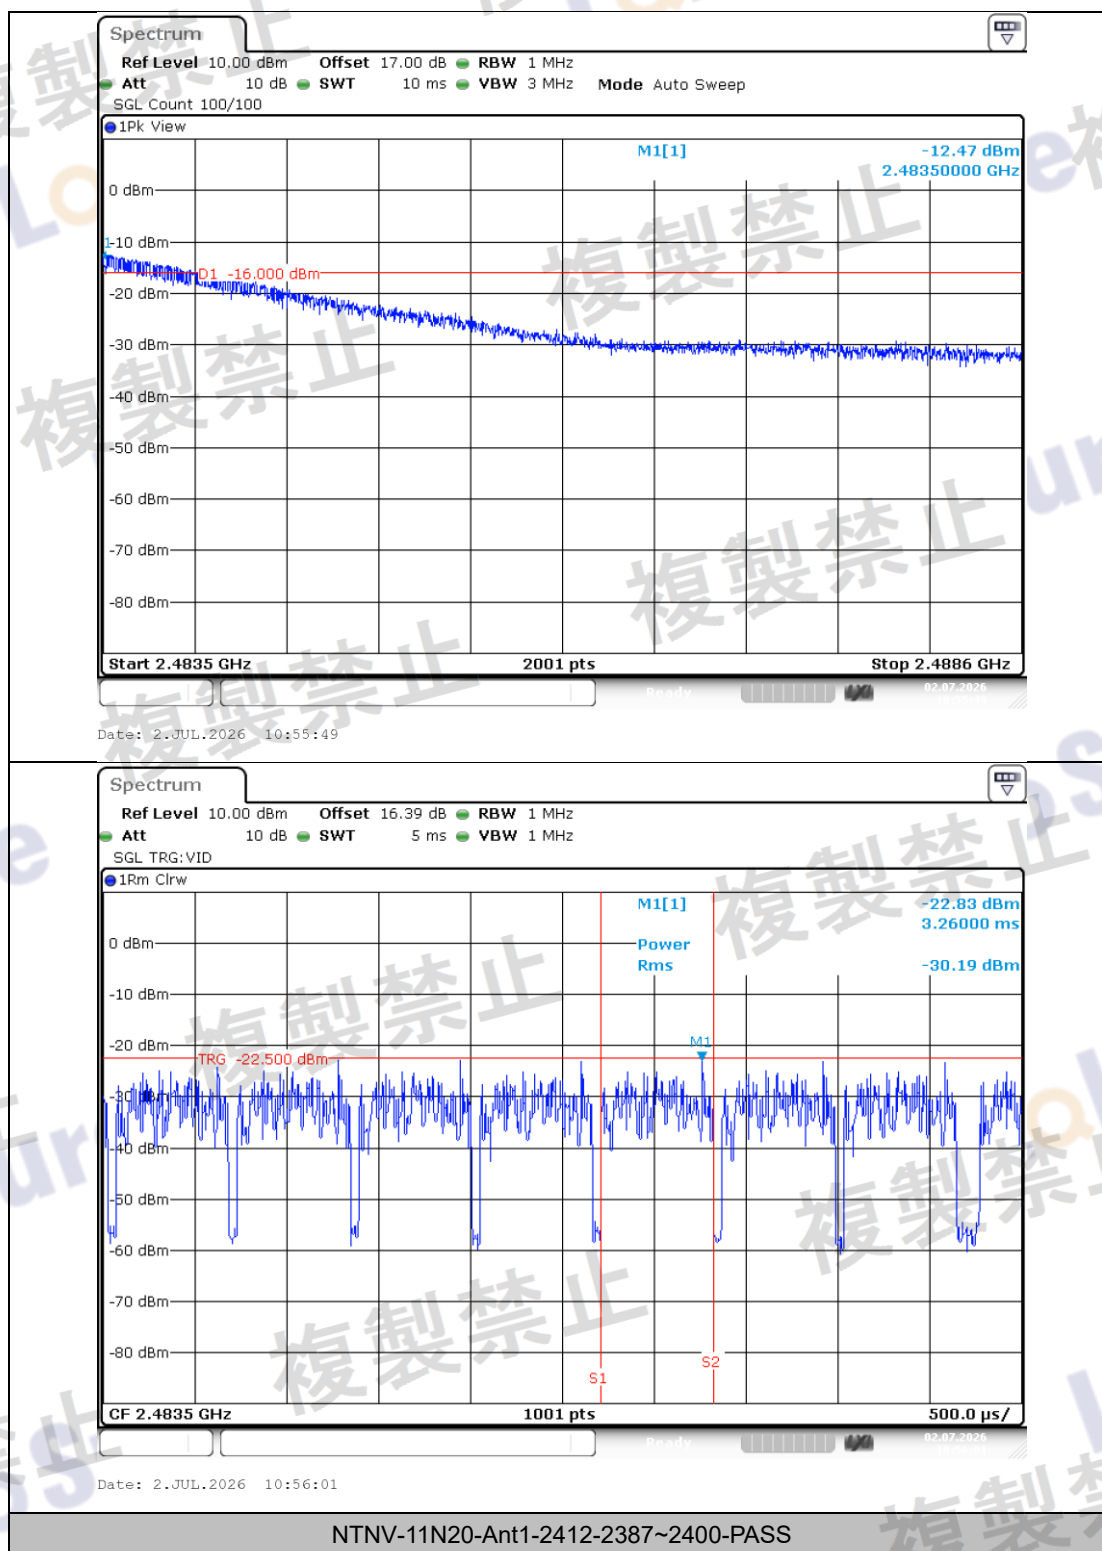


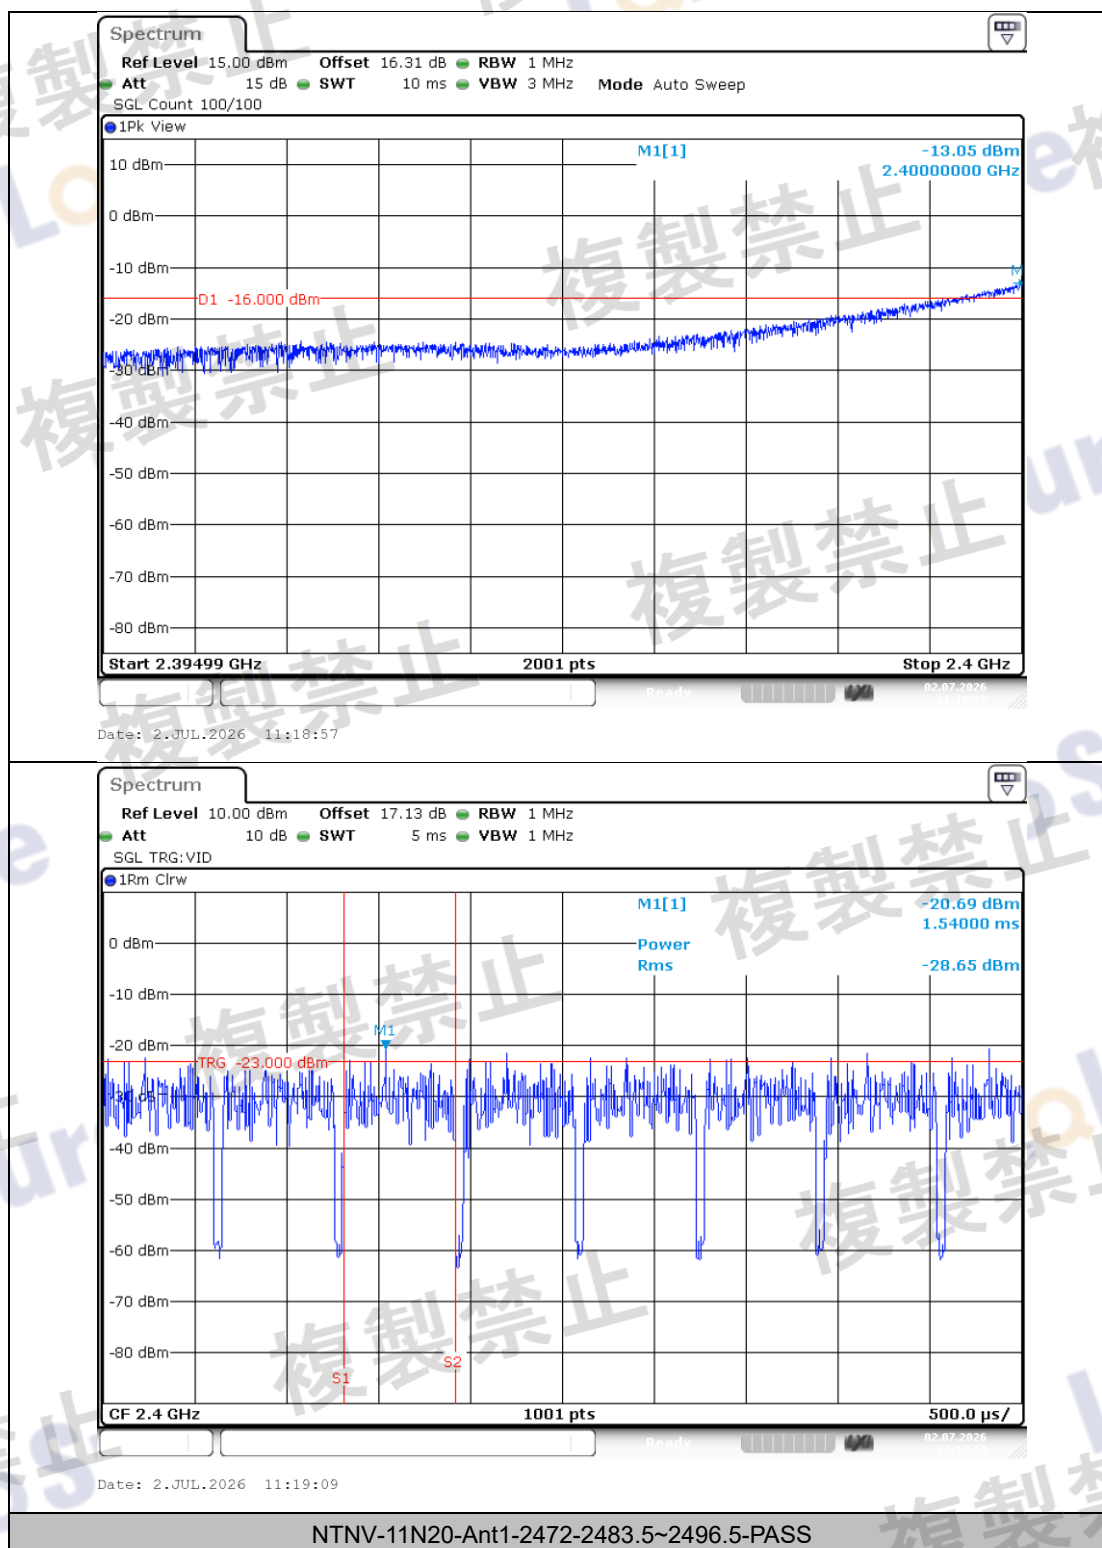

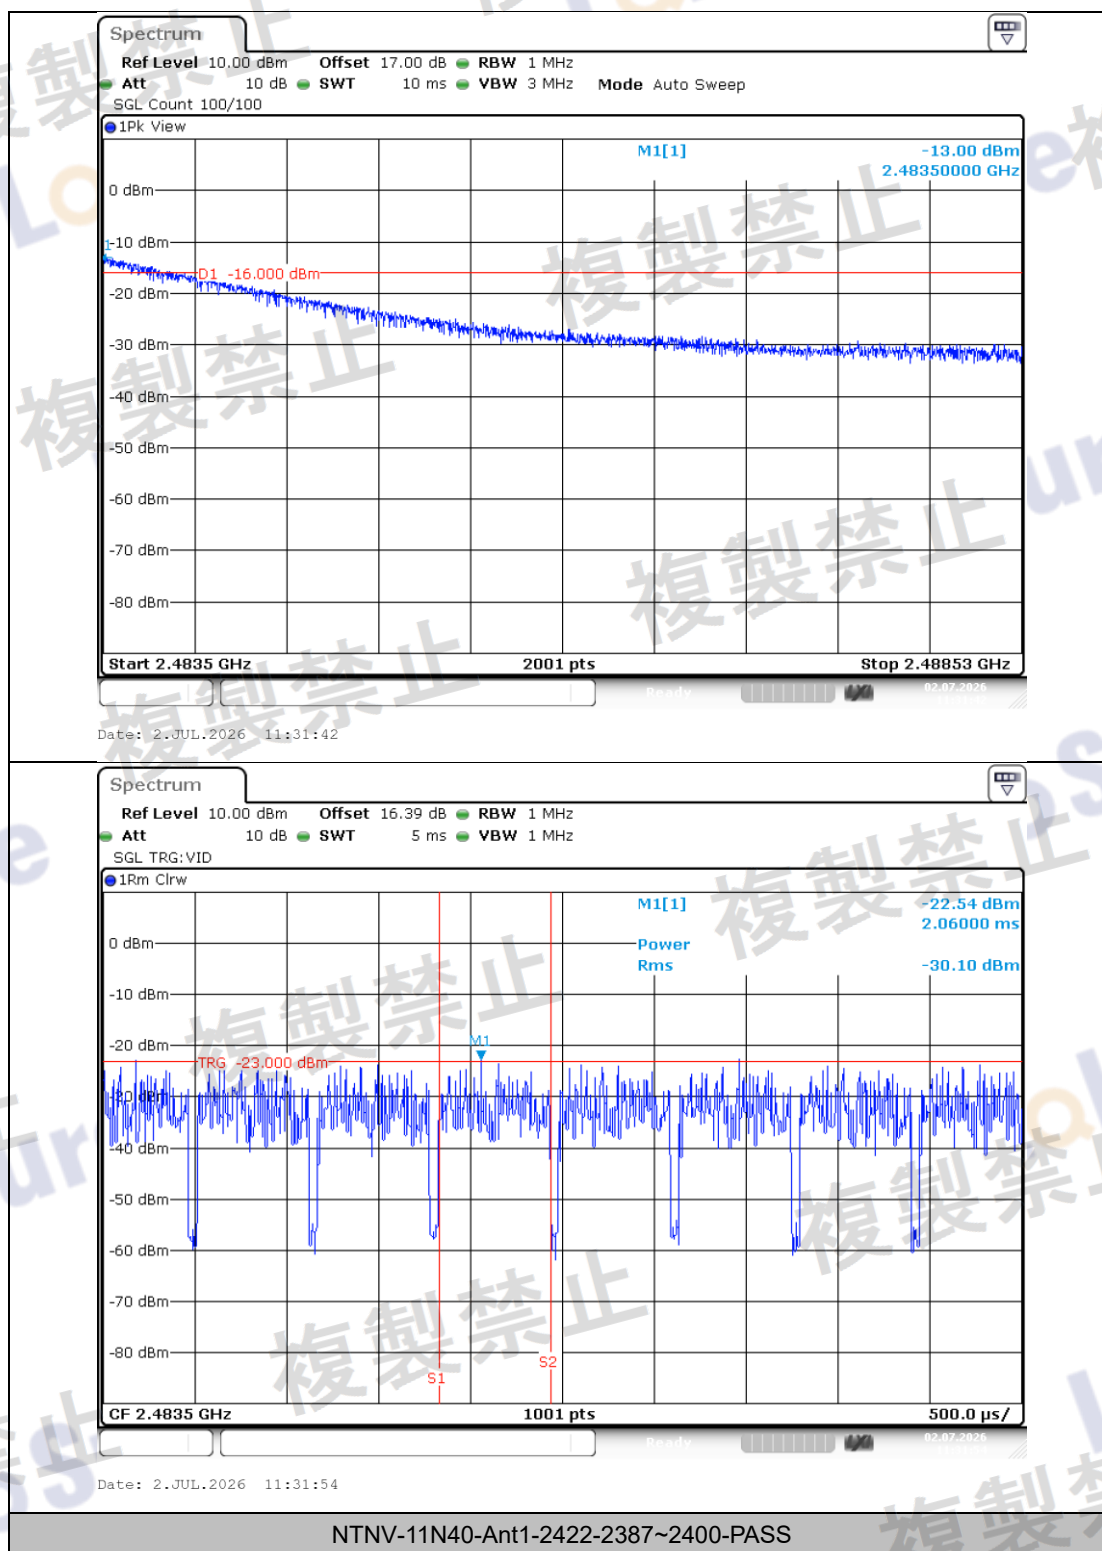

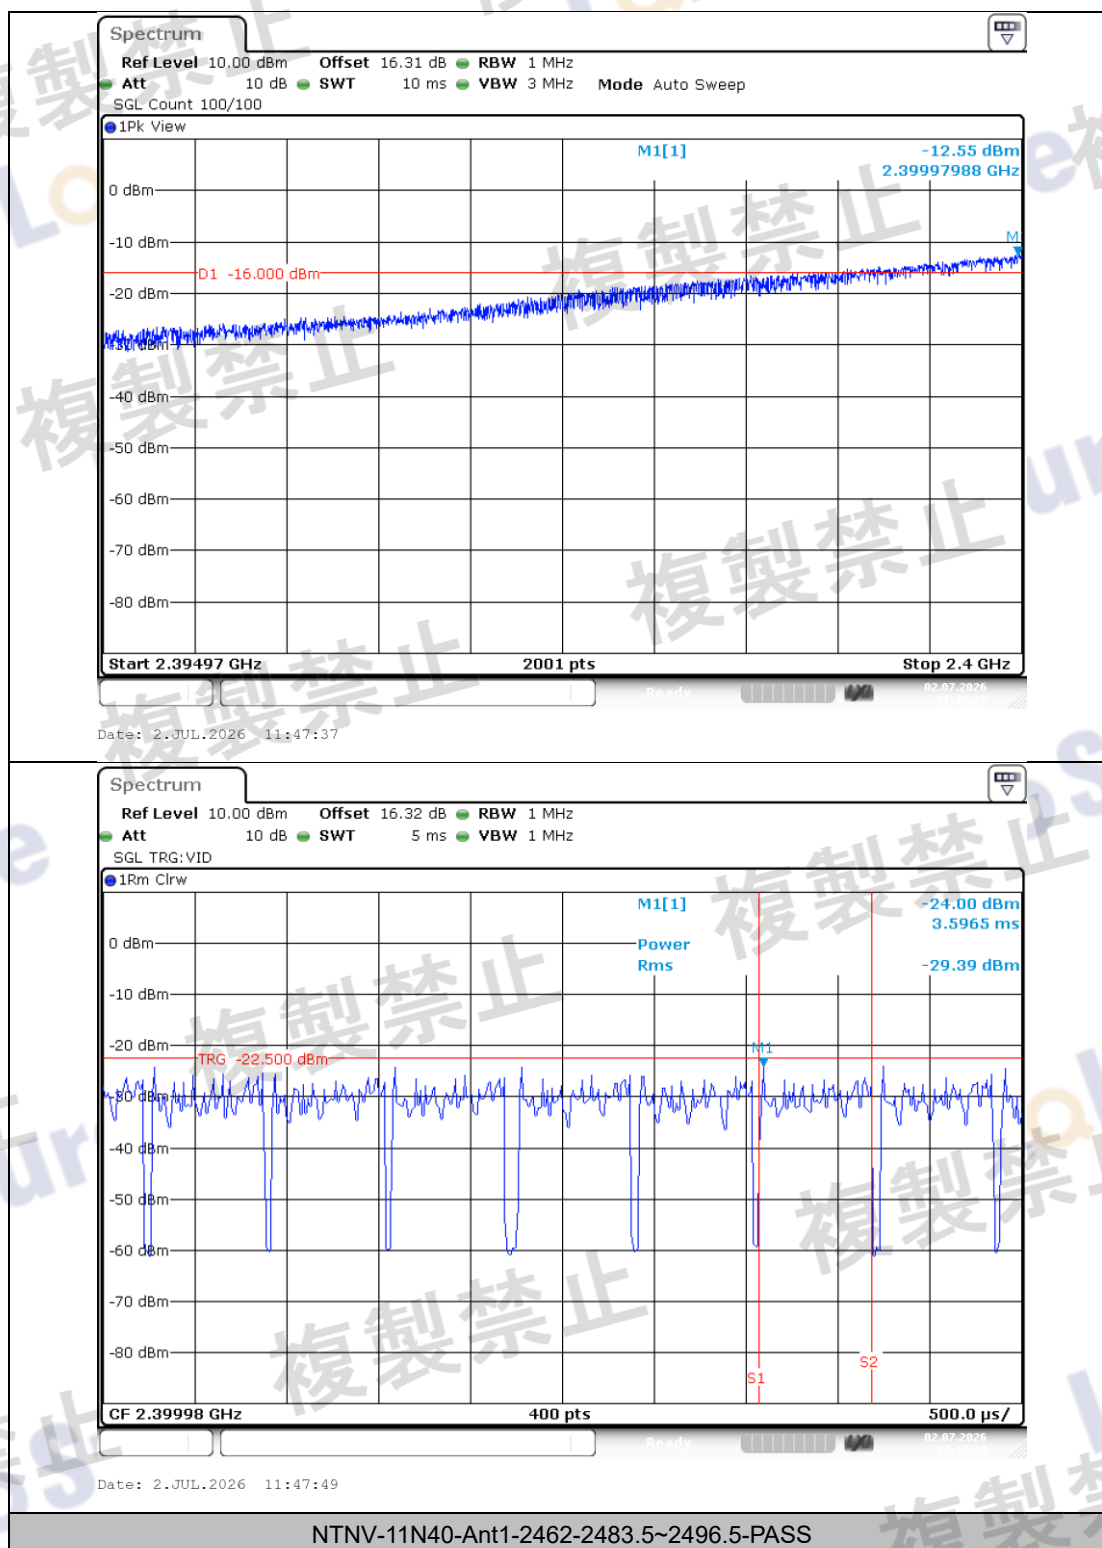

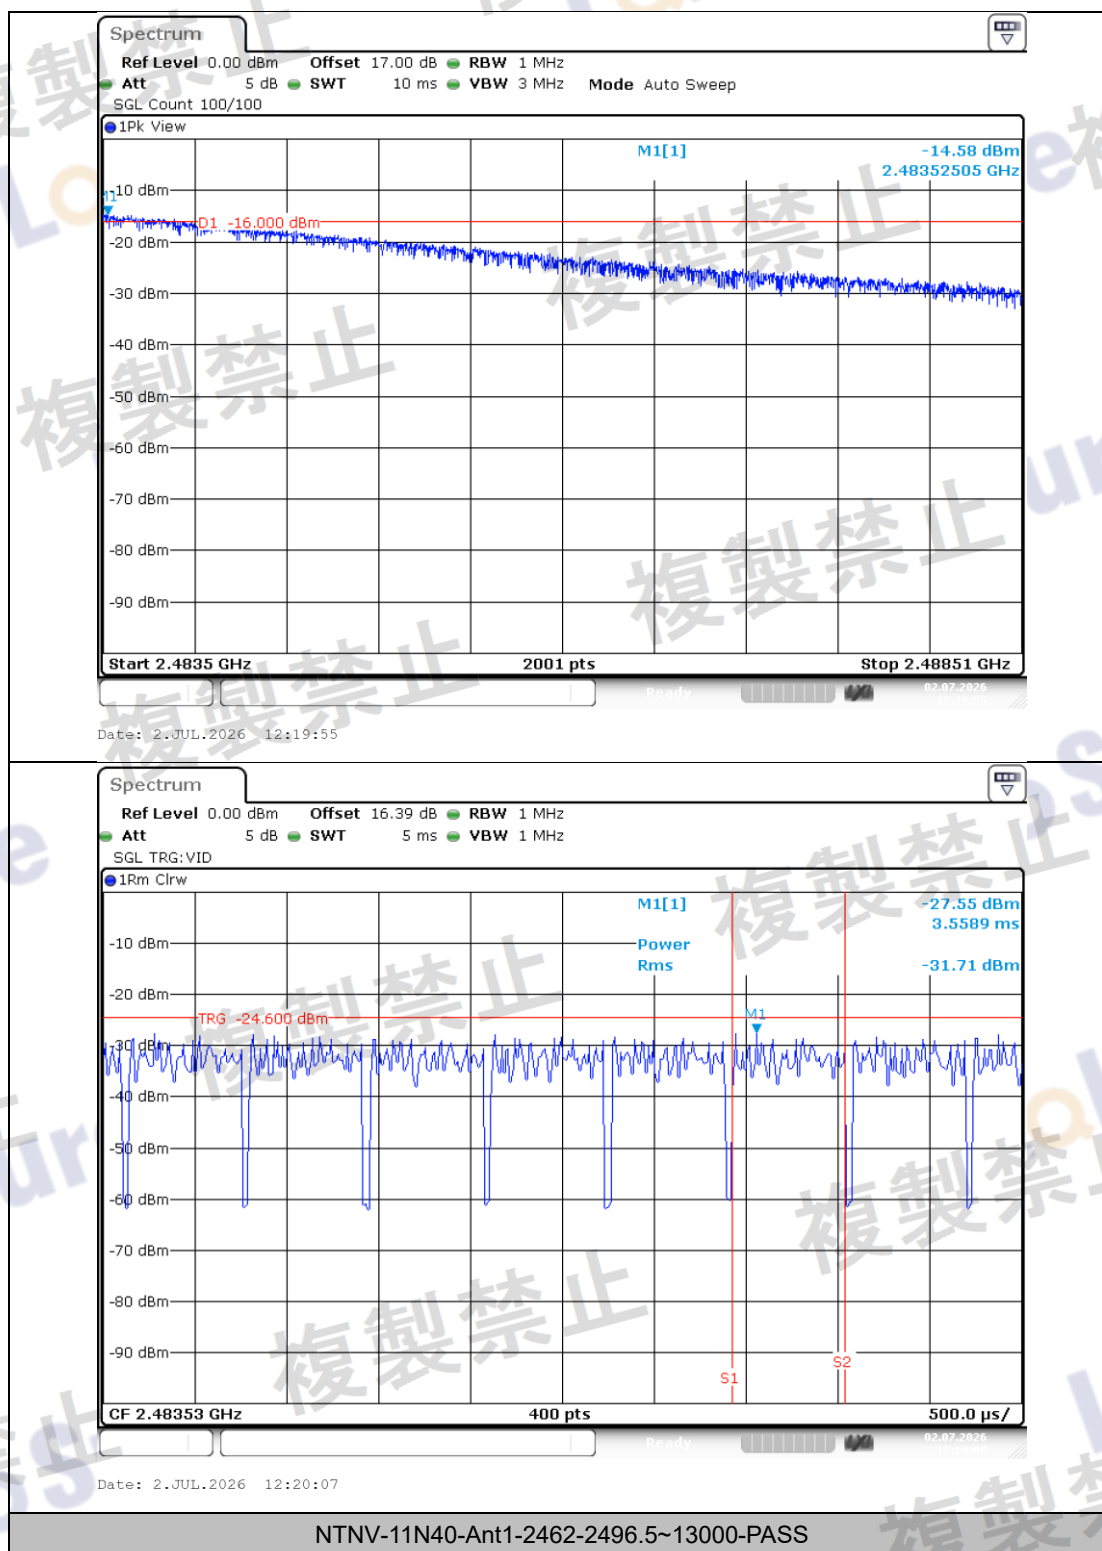

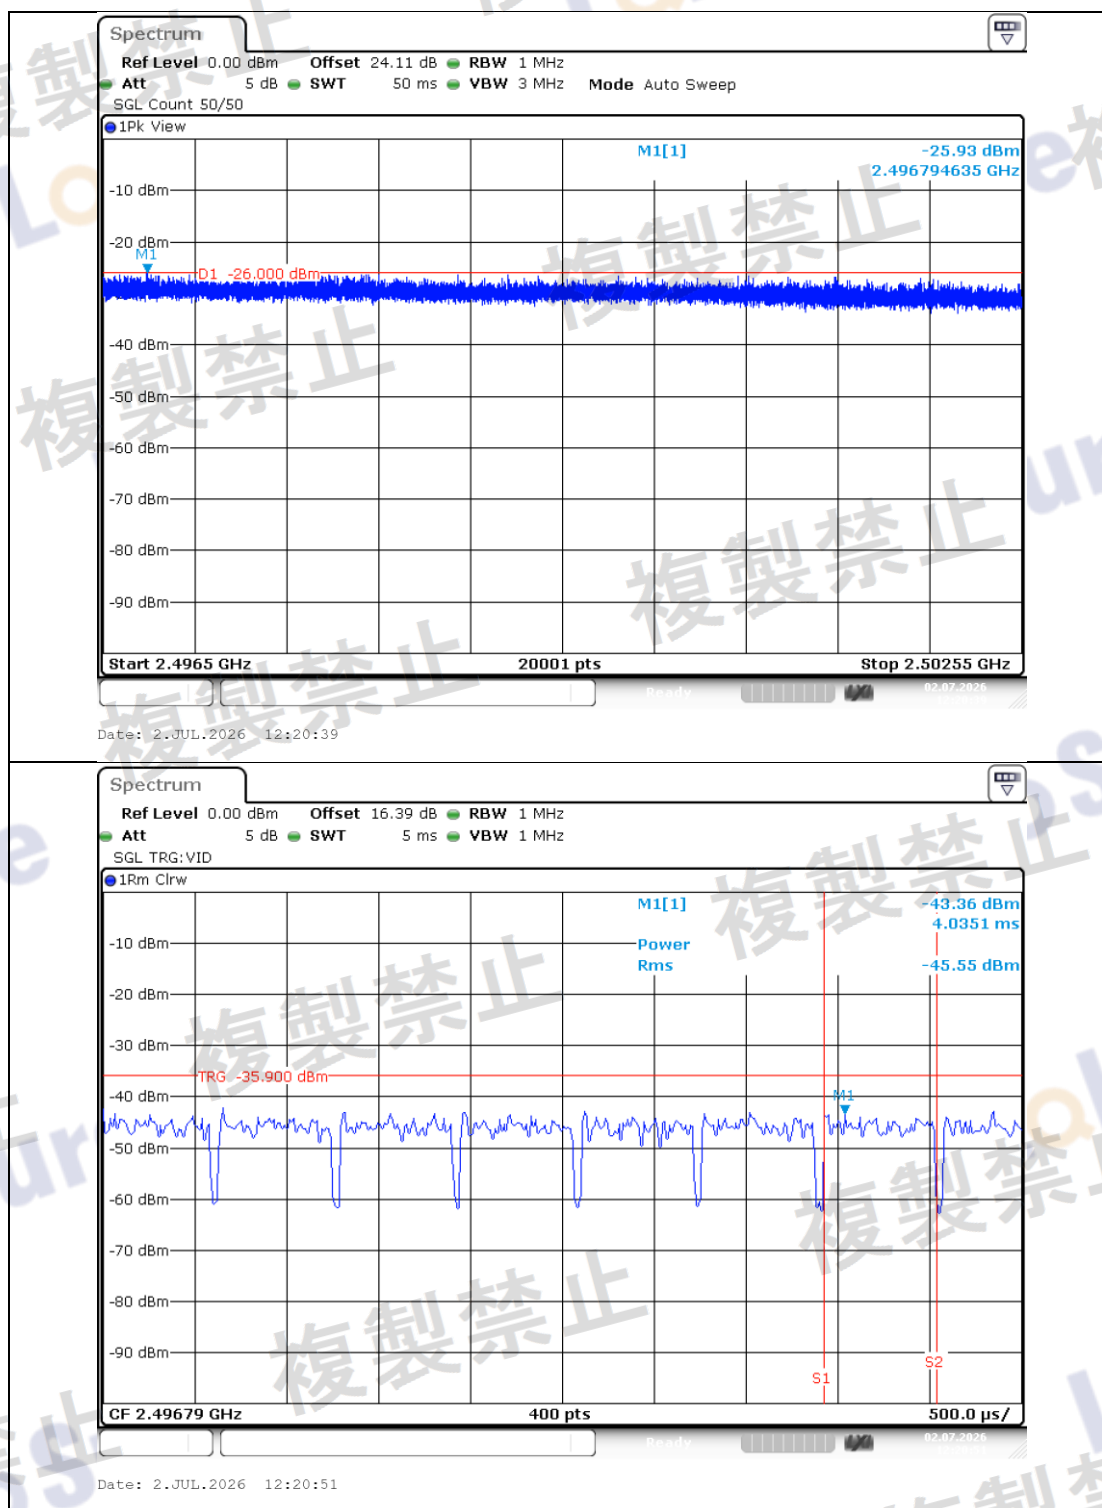



Appendix F: Spurious Emission of RX

Test Result


TestCondition	TestMode	Antenna	Frequency [MHz]	Freq.Range [MHz]	Freq. [MHz]	Result [dBm]	Limit [dBm]	Result [nW]	Limit [nW]	Verdict
NTNV	11B	Ant1	2412	30~1000	818.46	-69.88	≤-54	0.10280	≤4	PASS
NTNV	11B	Ant1	2412	1000~13000	6607.62	-61.18	≤-47	0.76208	≤20	PASS
NTNV	11B	Ant1	2442	30~1000	914.93	-69.44	≤-54	0.11376	≤4	PASS
NTNV	11B	Ant1	2442	1000~13000	3256.19	-60.68	≤-47	0.85507	≤20	PASS
NTNV	11B	Ant1	2472	30~1000	803.92	-70.76	≤-54	0.08395	≤4	PASS
NTNV	11B	Ant1	2472	1000~13000	6854.81	-62.51	≤-47	0.56105	≤20	PASS
NTNV	11G	Ant1	2412	30~1000	804.89	-70.23	≤-54	0.09484	≤4	PASS
NTNV	11G	Ant1	2412	1000~13000	3215.99	-61.89	≤-47	0.64714	≤20	PASS
NTNV	11G	Ant1	2442	30~1000	846.09	-69.11	≤-54	0.12274	≤4	PASS
NTNV	11G	Ant1	2442	1000~13000	2459.43	-60.81	≤-47	0.82985	≤20	PASS
NTNV	11G	Ant1	2472	30~1000	889.23	-70.43	≤-54	0.09057	≤4	PASS
NTNV	11G	Ant1	2472	1000~13000	2445.03	-61.73	≤-47	0.67143	≤20	PASS
NTNV	11N20	Ant1	2412	30~1000	904.75	-69.82	≤-54	0.10423	≤4	PASS
NTNV	11N20	Ant1	2412	1000~13000	2425.83	-60.24	≤-47	0.94624	≤20	PASS
NTNV	11N20	Ant1	2442	30~1000	745.74	-69.39	≤-54	0.11508	≤4	PASS
NTNV	11N20	Ant1	2442	1000~13000	5751.46	-60.05	≤-47	0.98855	≤20	PASS
NTNV	11N20	Ant1	2472	30~1000	929.47	-70.15	≤-54	0.09661	≤4	PASS
NTNV	11N20	Ant1	2472	1000~13000	6247.64	-63.30	≤-47	0.46774	≤20	PASS
NTNV	11N40	Ant1	2422	30~1000	620.68	-70.17	≤-54	0.09616	≤4	PASS
NTNV	11N40	Ant1	2422	1000~13000	2473.23	-61.24	≤-47	0.75162	≤20	PASS
NTNV	11N40	Ant1	2442	30~1000	634.25	-69.90	≤-54	0.10233	≤4	PASS
NTNV	11N40	Ant1	2442	1000~13000	3256.19	-61.76	≤-47	0.66681	≤20	PASS
NTNV	11N40	Ant1	2462	30~1000	997.33	-70.37	≤-54	0.09183	≤4	PASS
NTNV	11N40	Ant1	2462	1000~13000	2473.23	-61.73	≤-47	0.67143	≤20	PASS

Test Graphs

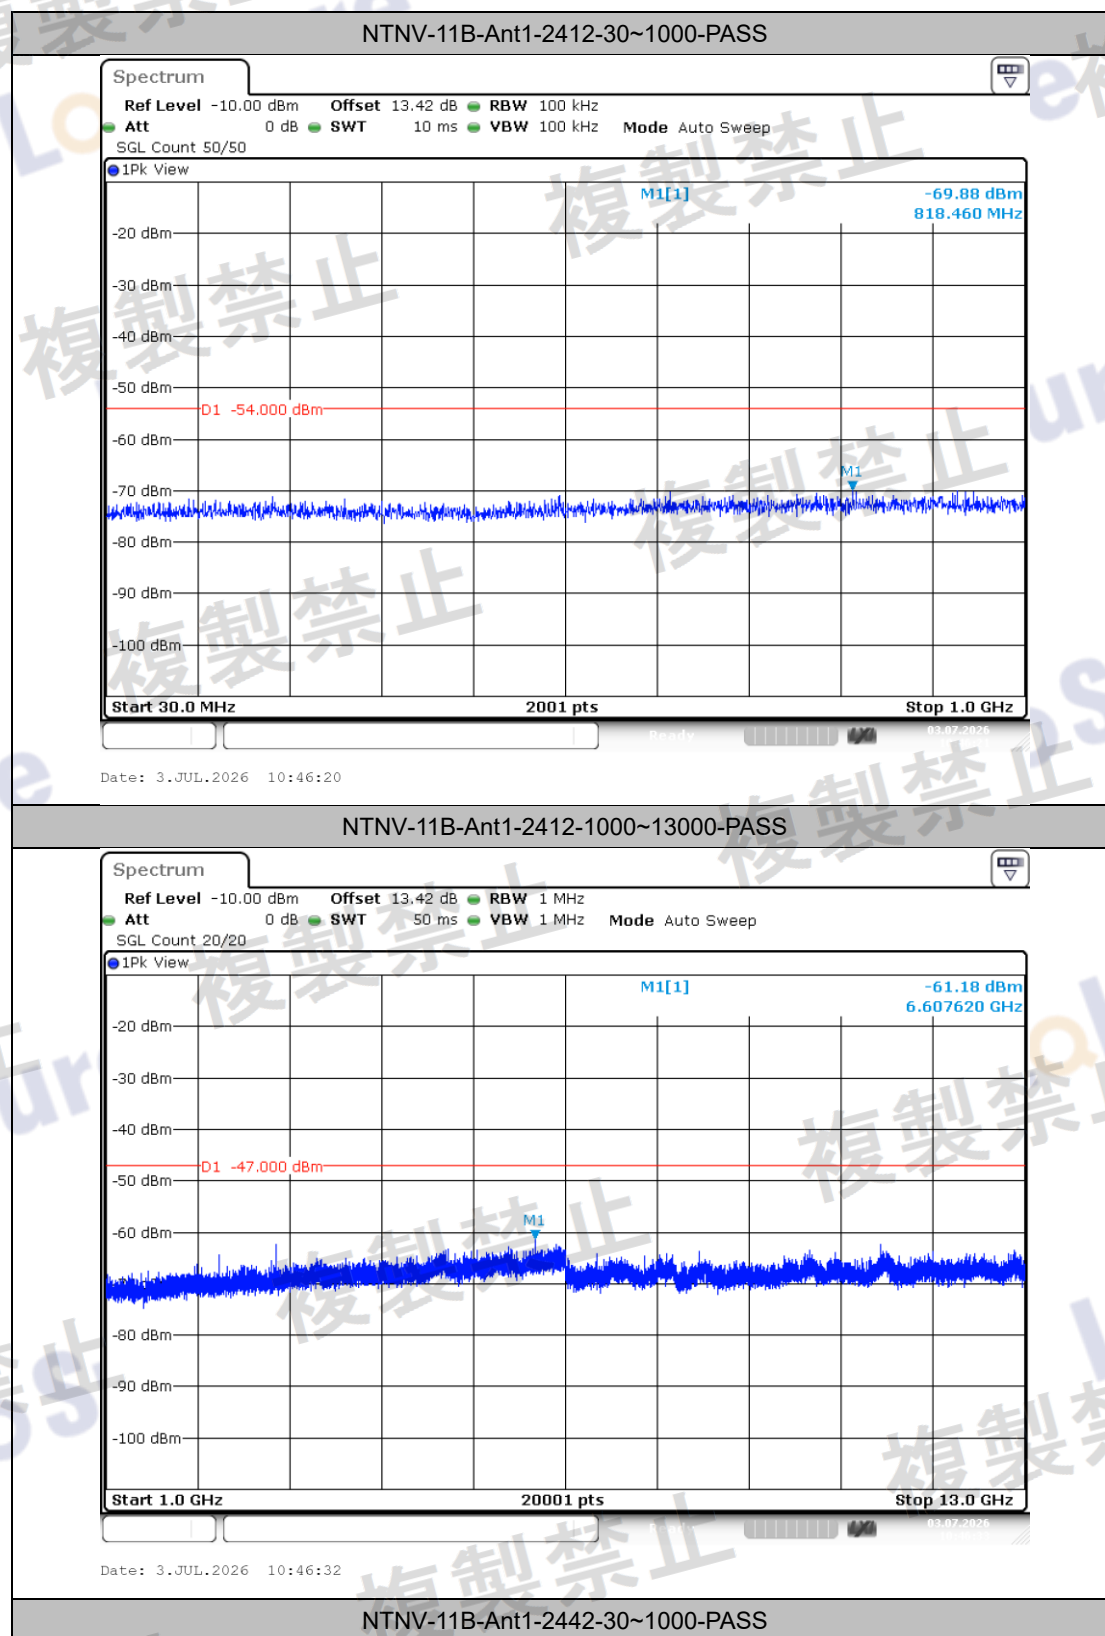


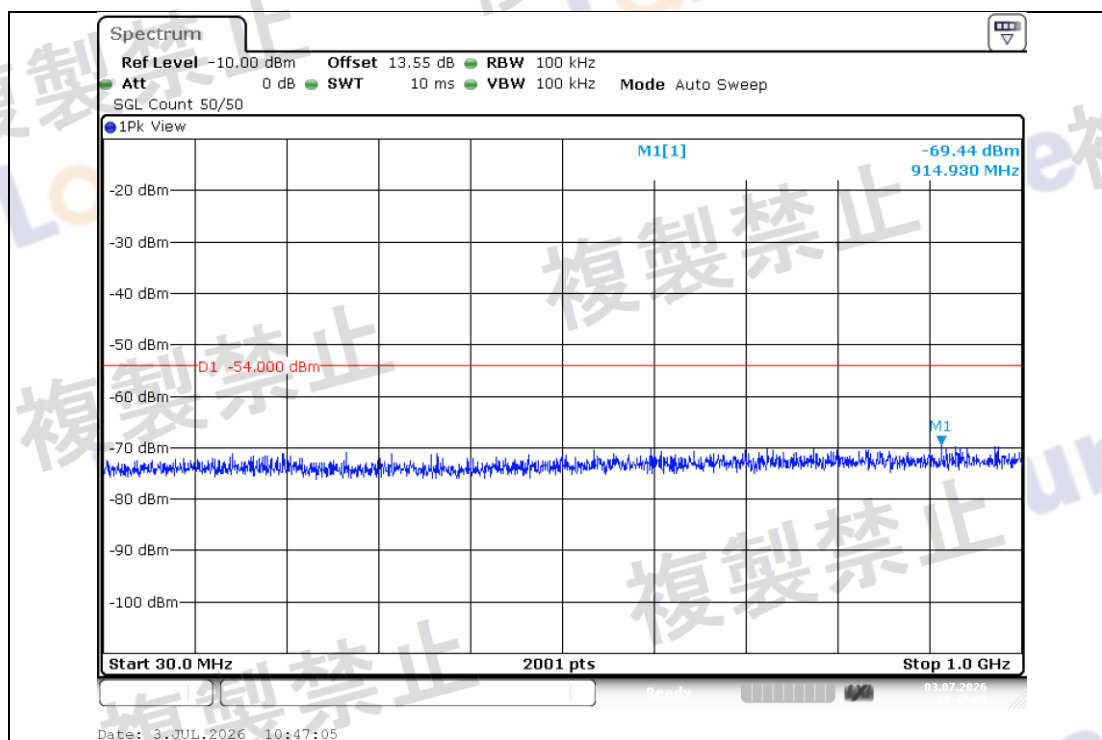


NTVN-11B-Ant1-2442-1000~13000-PASS

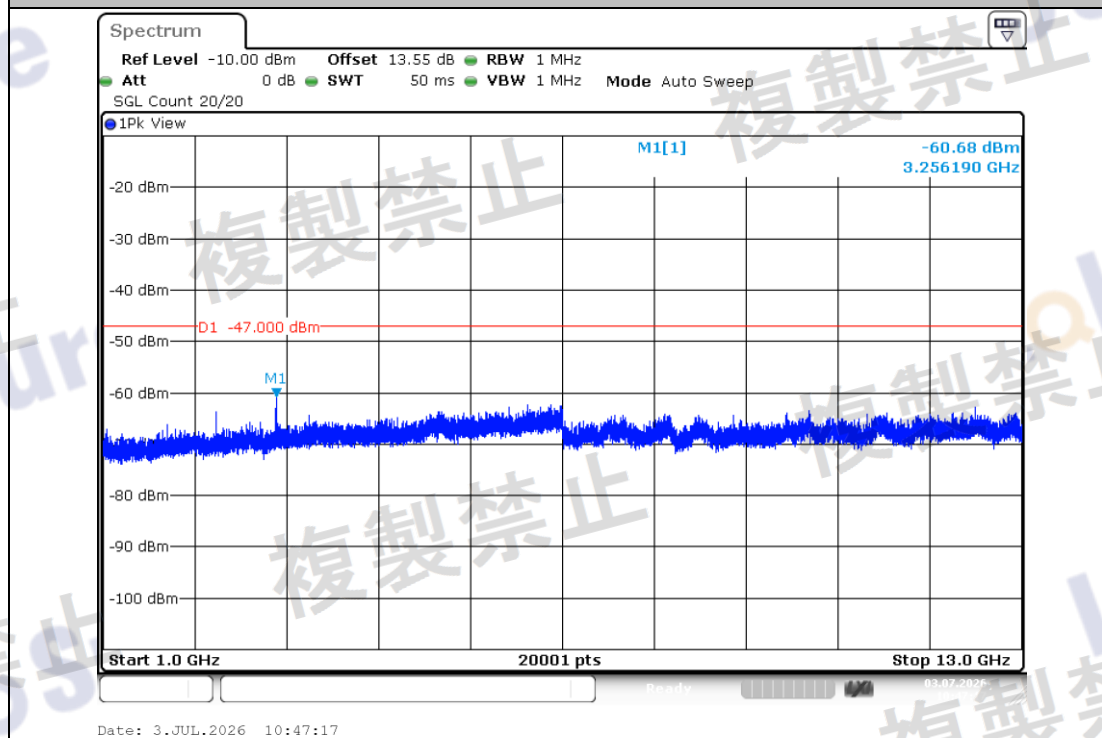


NTVN-11B-Ant1-2472-30~1000-PASS

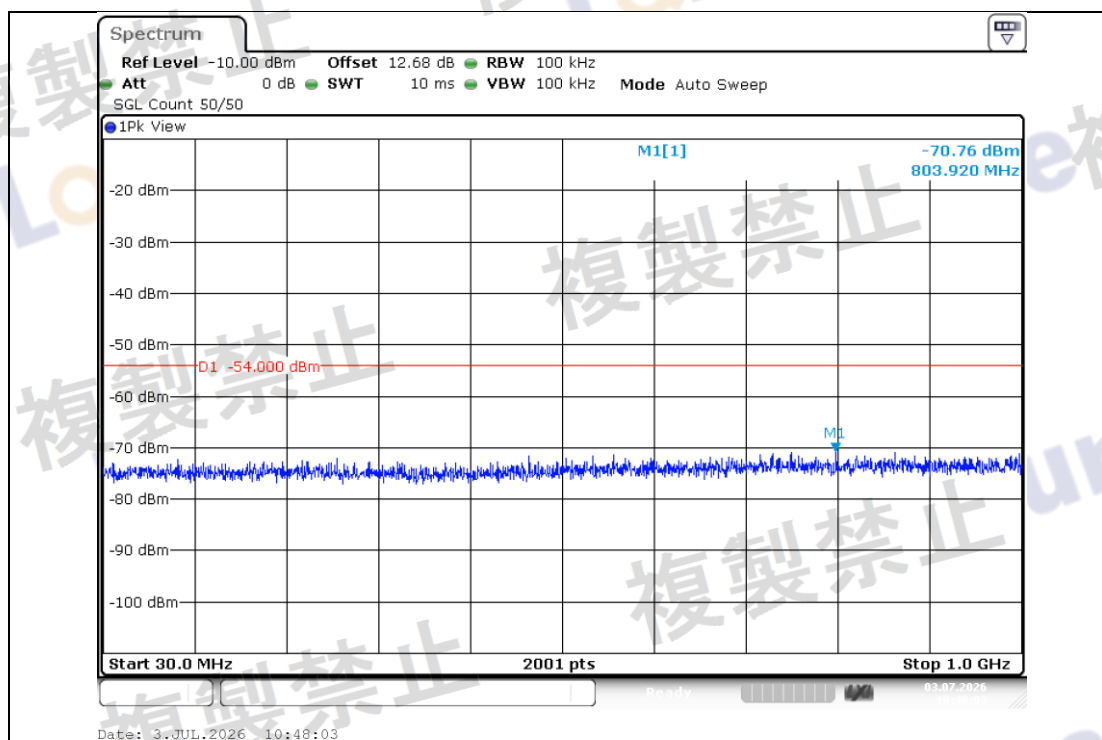


NTVN-11B-Ant1-2472-1000~13000-PASS

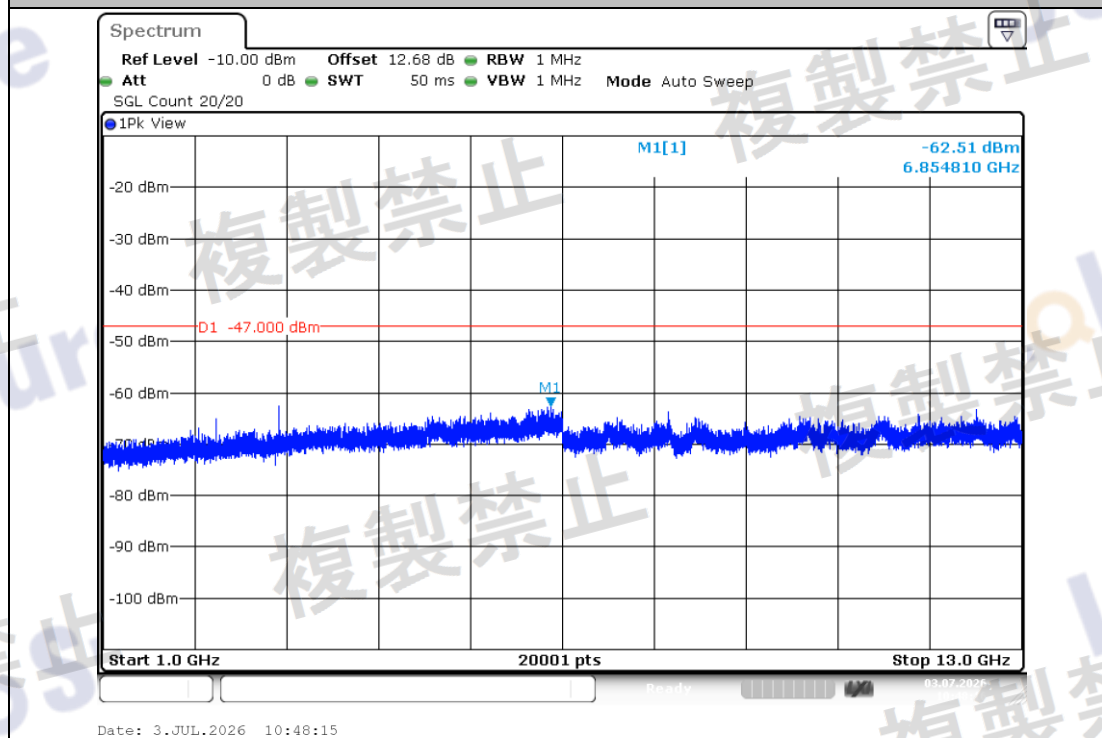


NTVN-11G-Ant1-2412-30~1000-PASS

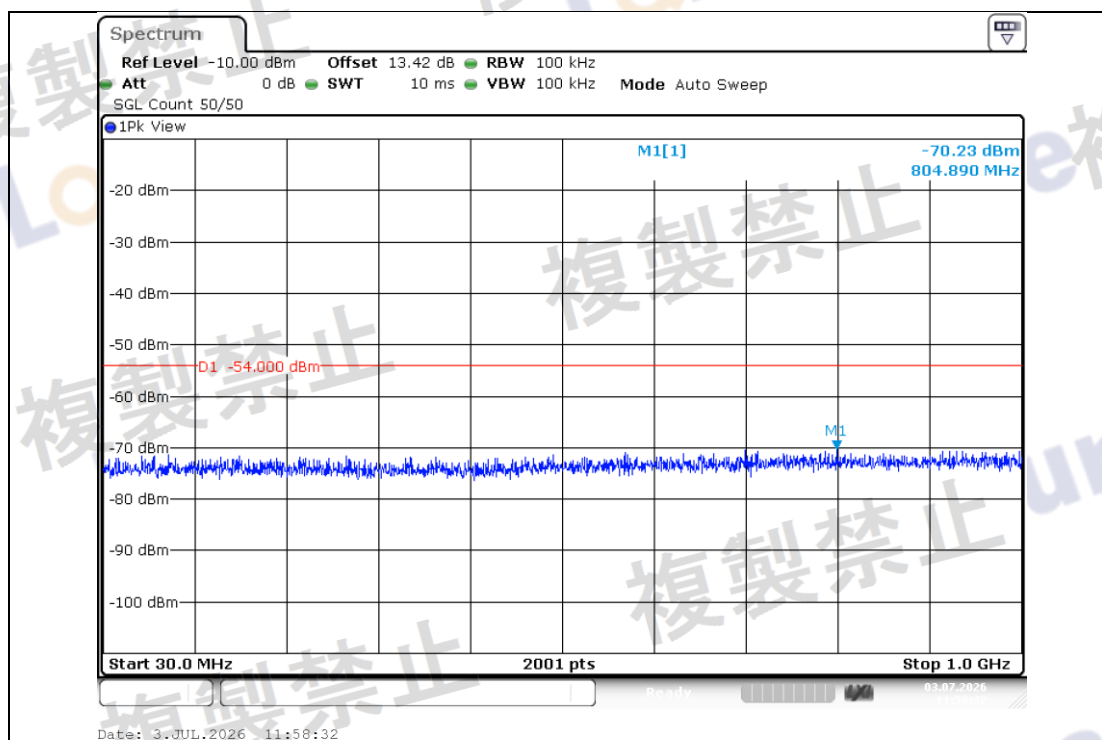


NTNV-11G-Ant1-2412-1000~13000-PASS

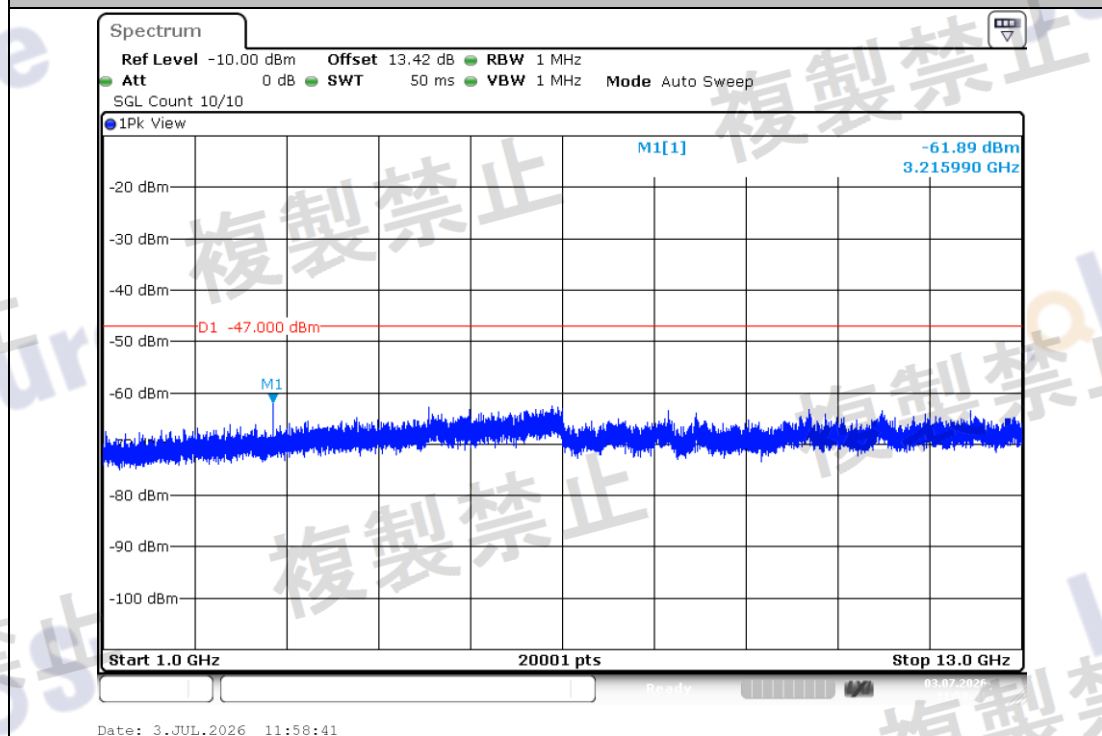


NTNV-11G-Ant1-2442-30~1000-PASS

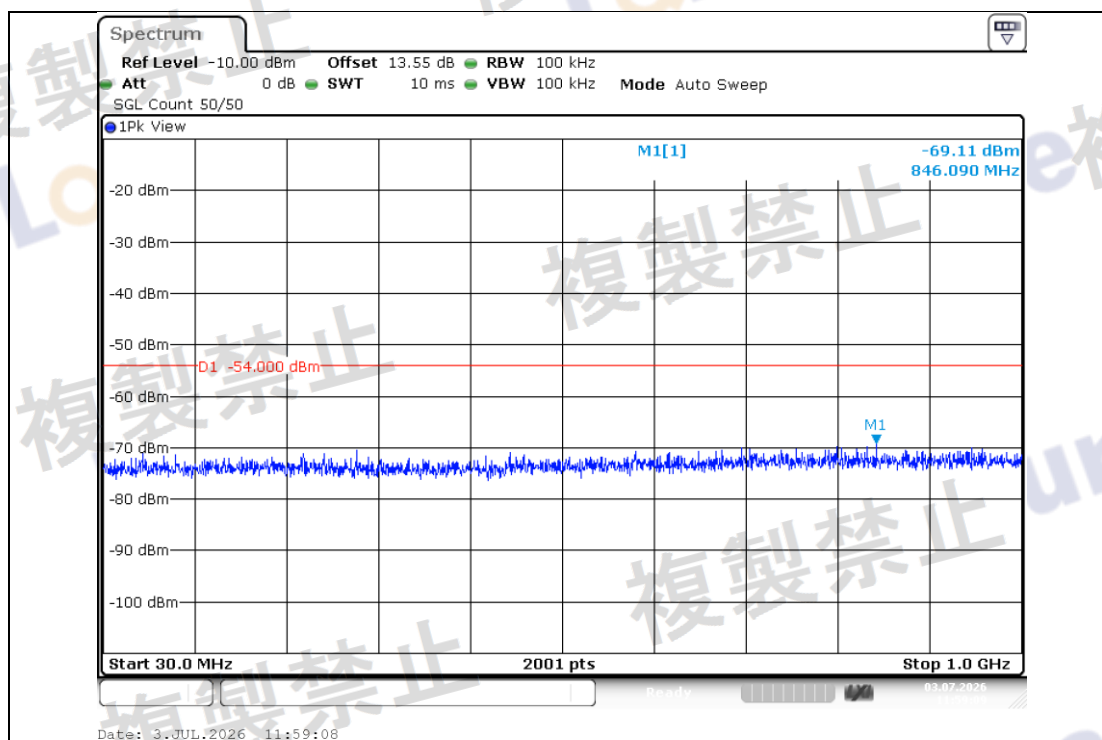


NTNV-11G-Ant1-2442-1000~13000-PASS

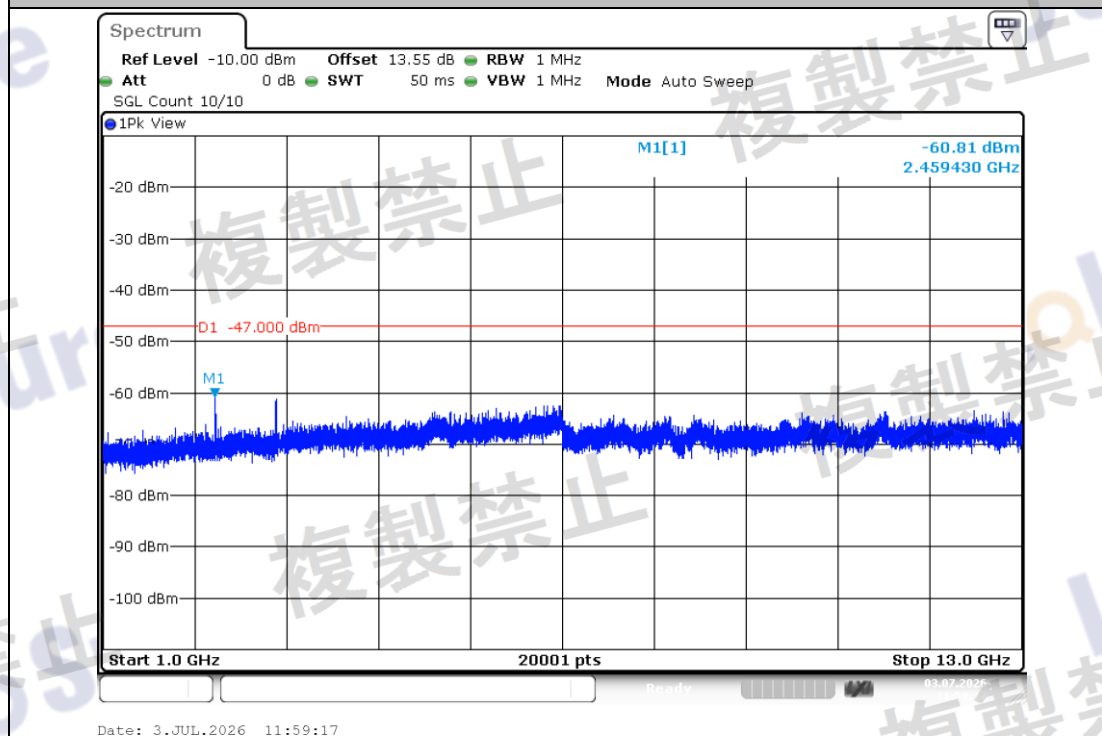


NTNV-11G-Ant1-2472-30~1000-PASS

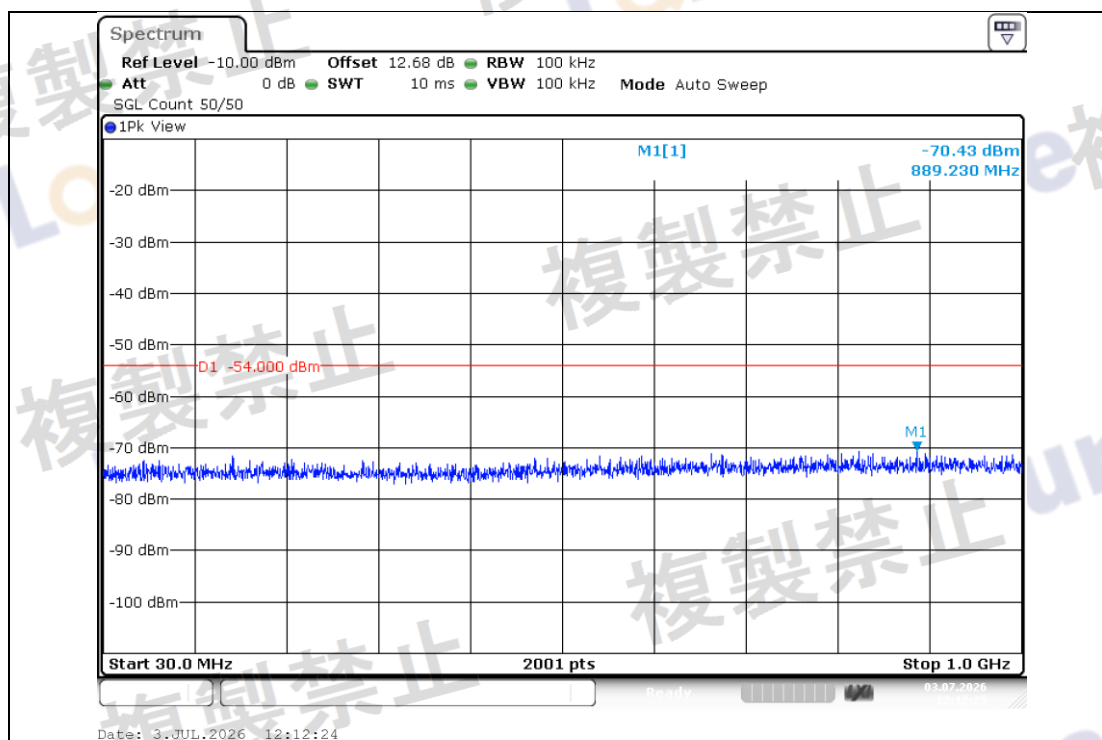


NTVN-11G-Ant1-2472-1000~13000-PASS

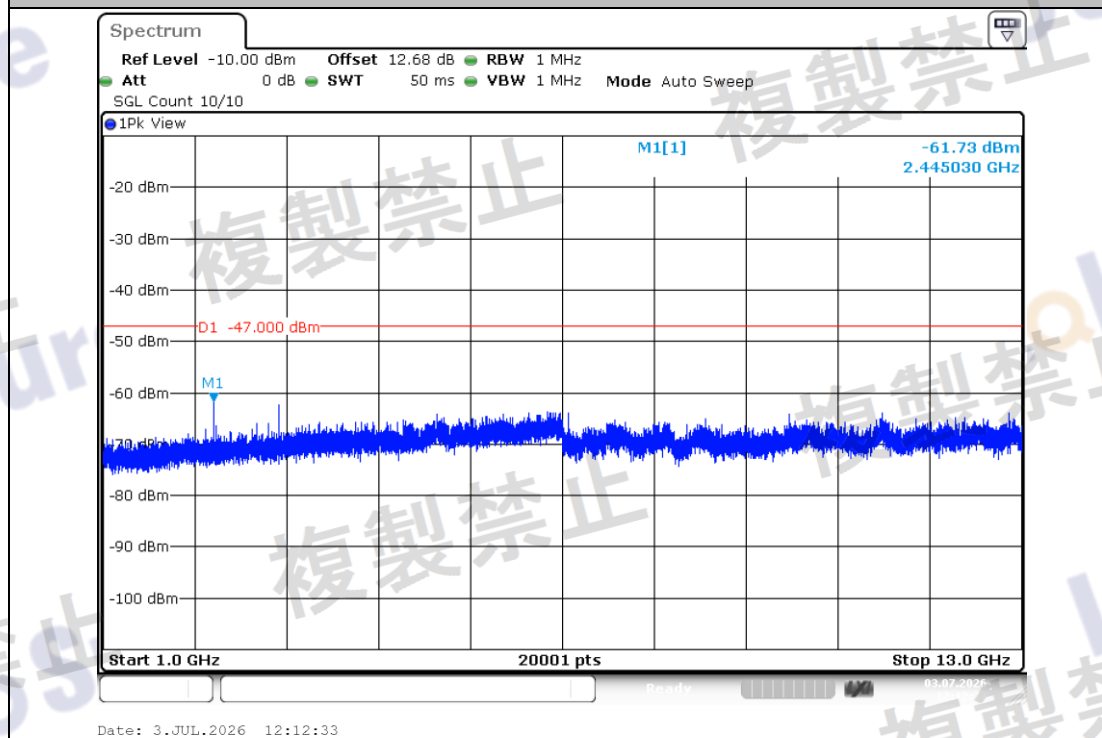


NTVN-11N20-Ant1-2412-30~1000-PASS

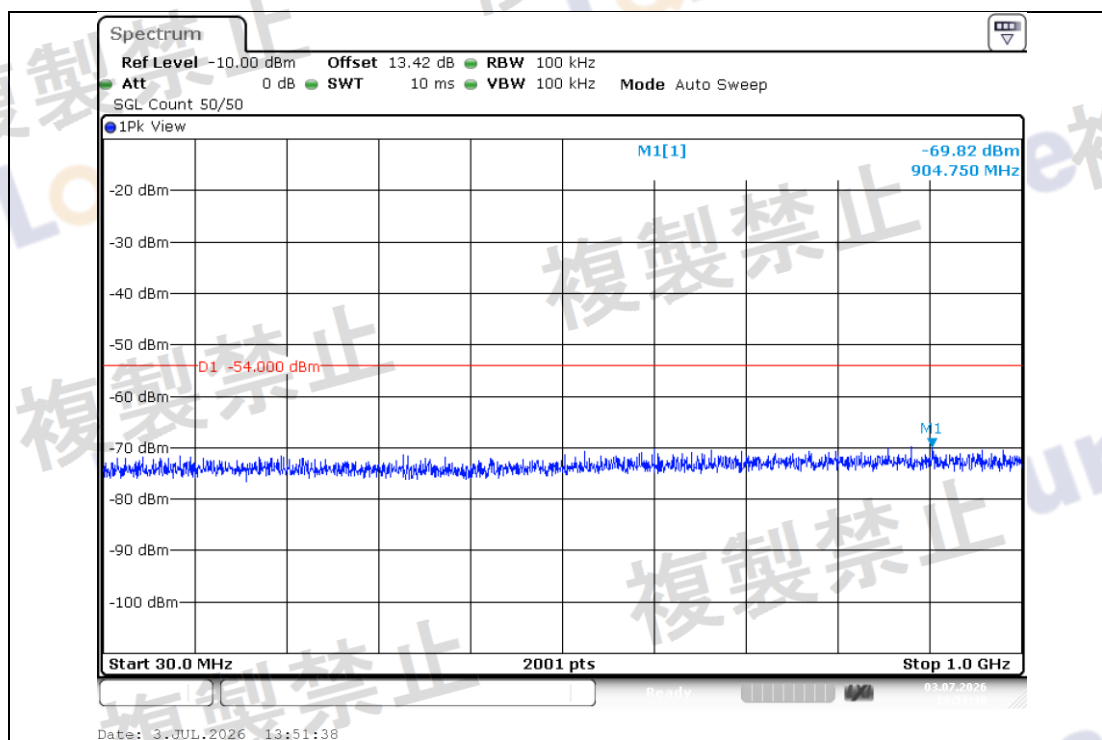


NTNV-11N20-Ant1-2412-1000~13000-PASS

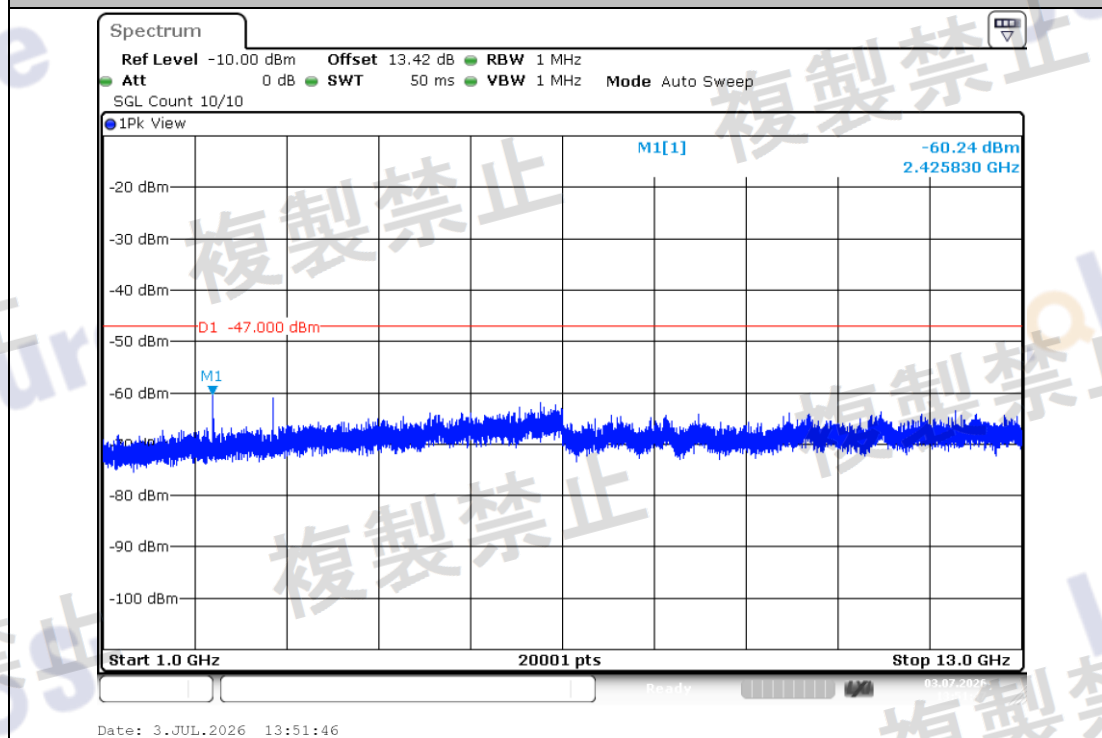


NTNV-11N20-Ant1-2442-30~1000-PASS

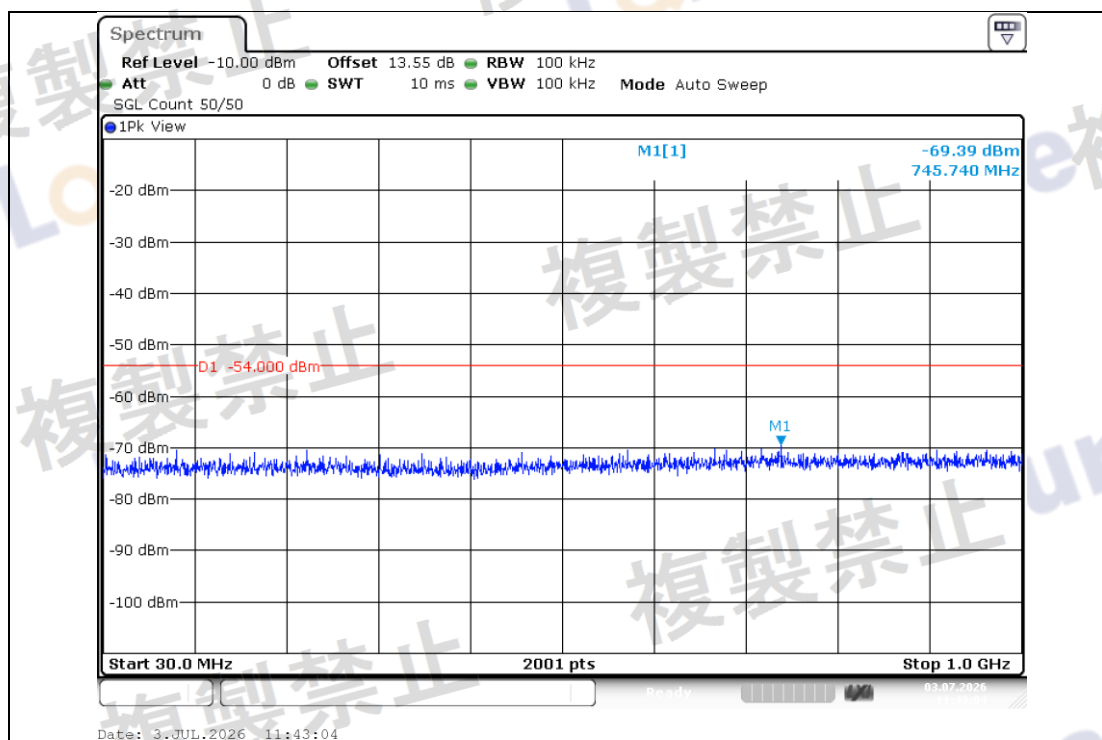


NTNV-11N20-Ant1-2442-1000~13000-PASS

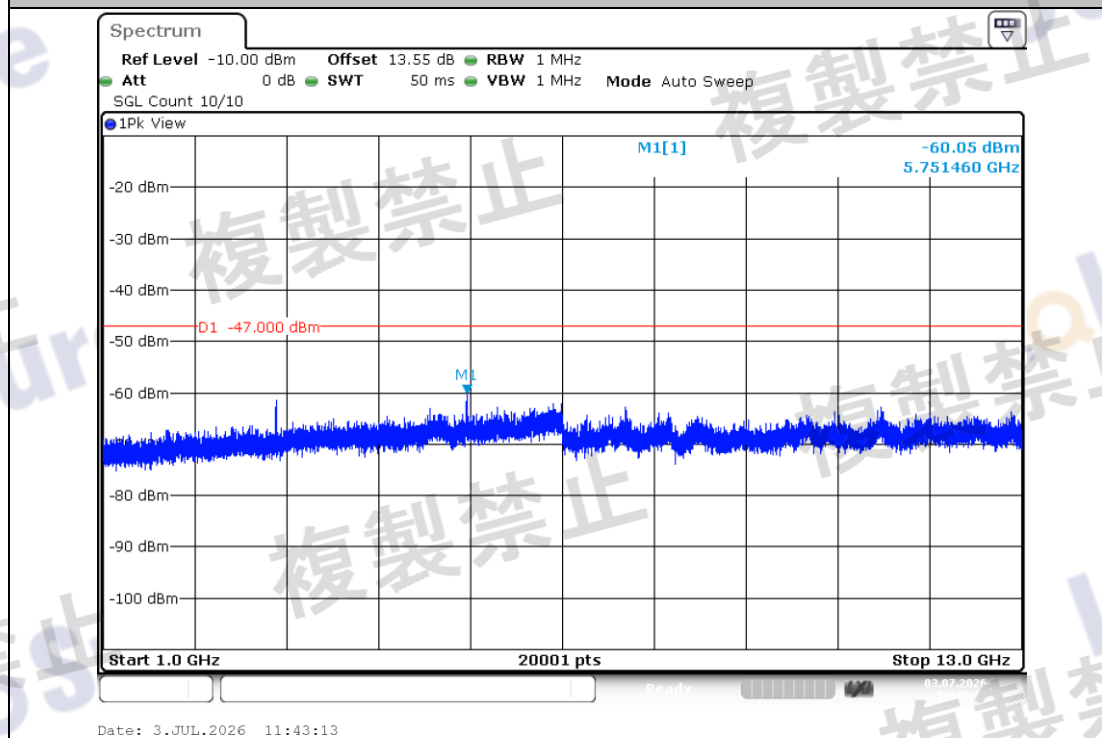


NTNV-11N20-Ant1-2472-30~1000-PASS

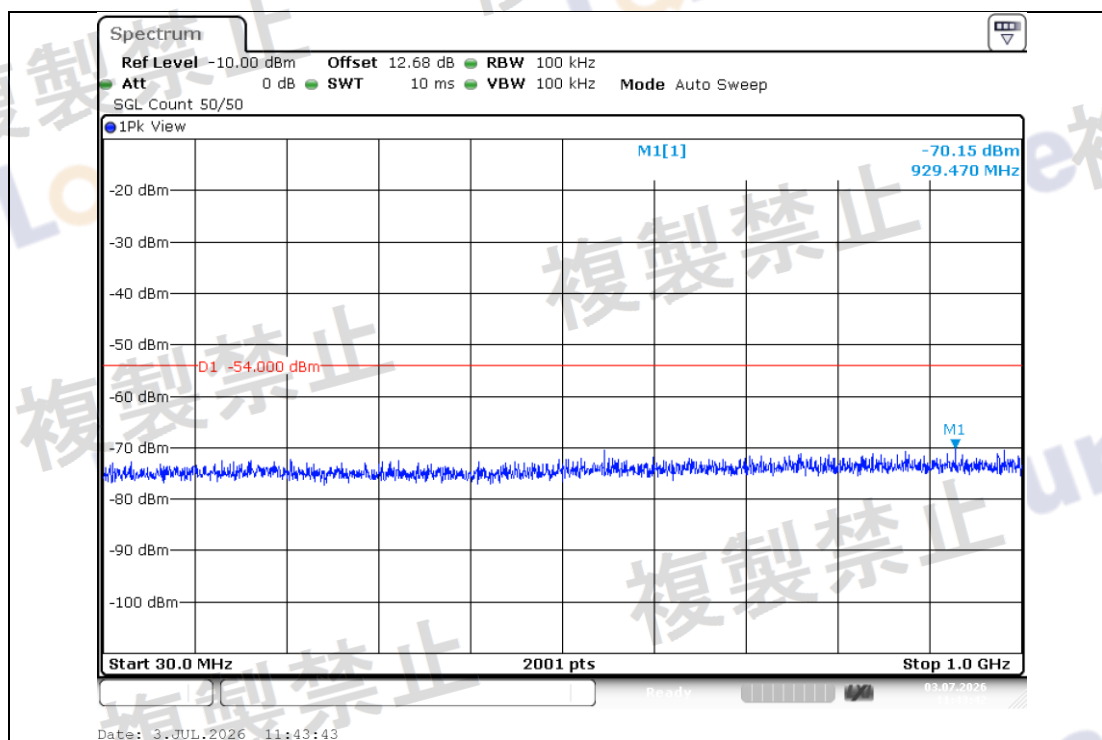


NTNV-11N20-Ant1-2472-1000~13000-PASS

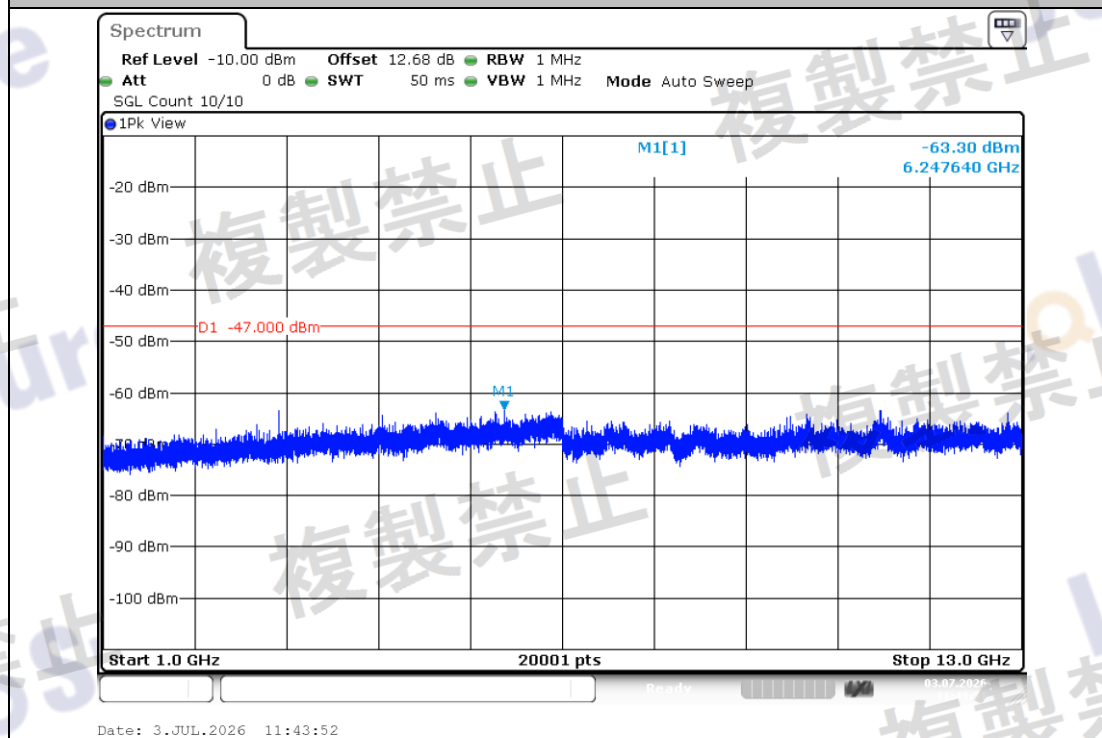


NTNV-11N40-Ant1-2422-30~1000-PASS

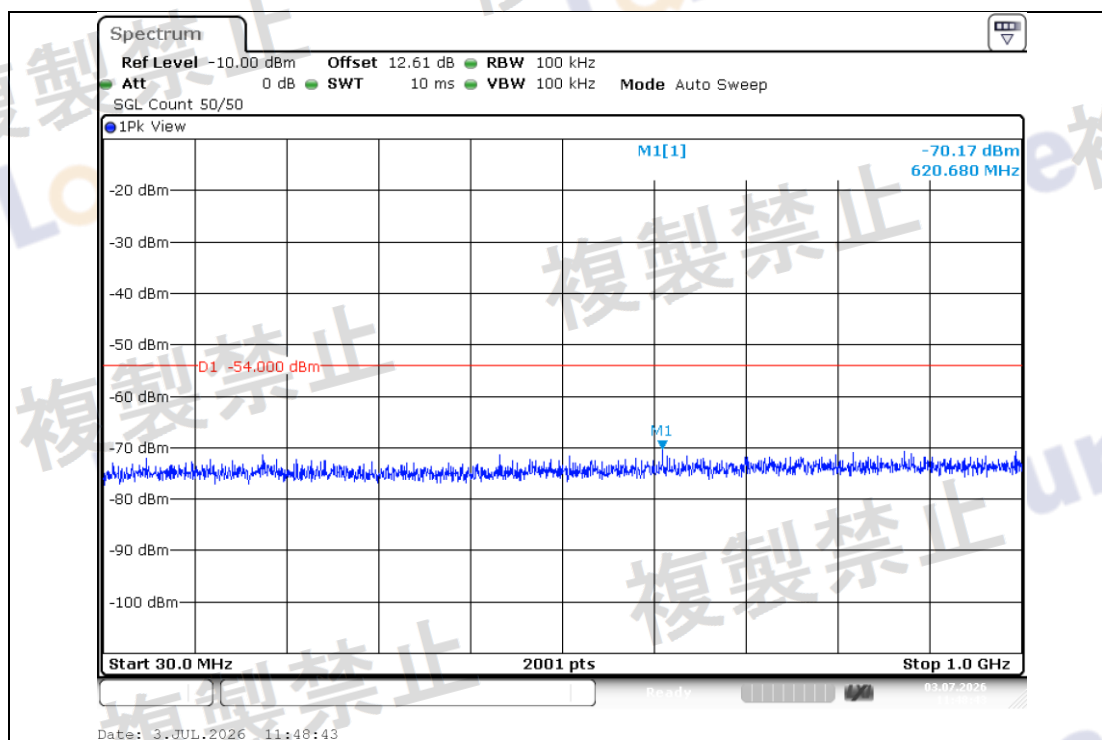


NTNV-11N40-Ant1-2422-1000~13000-PASS

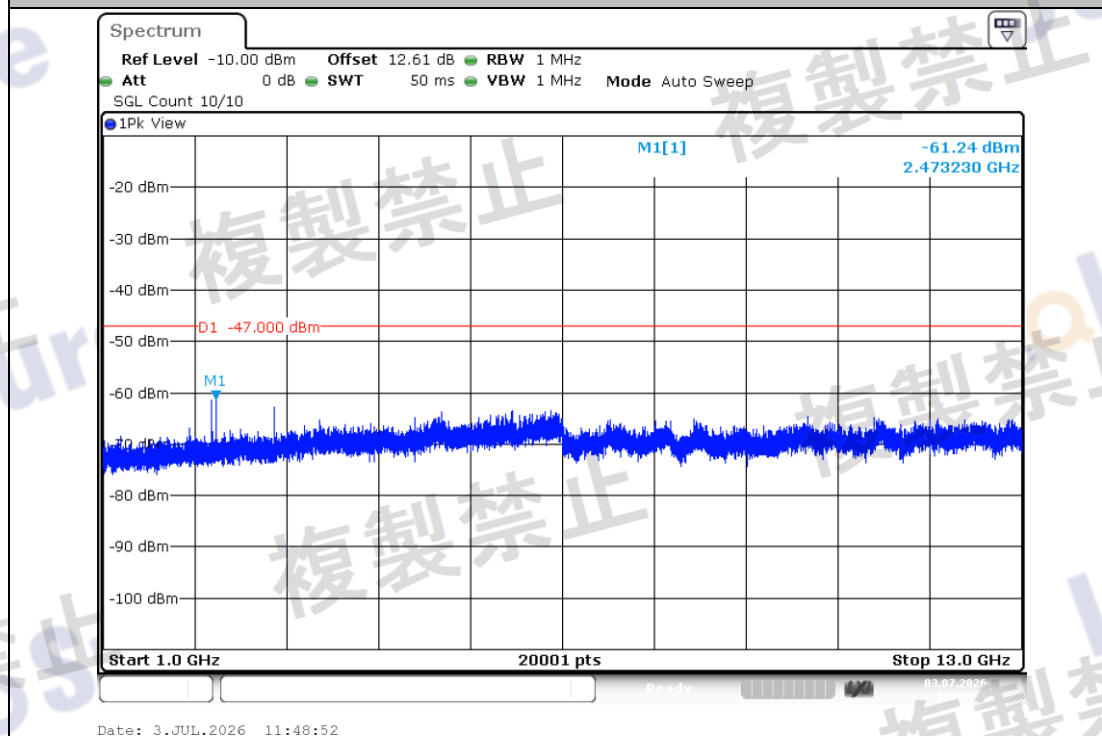


NTNV-11N40-Ant1-2442-30~1000-PASS

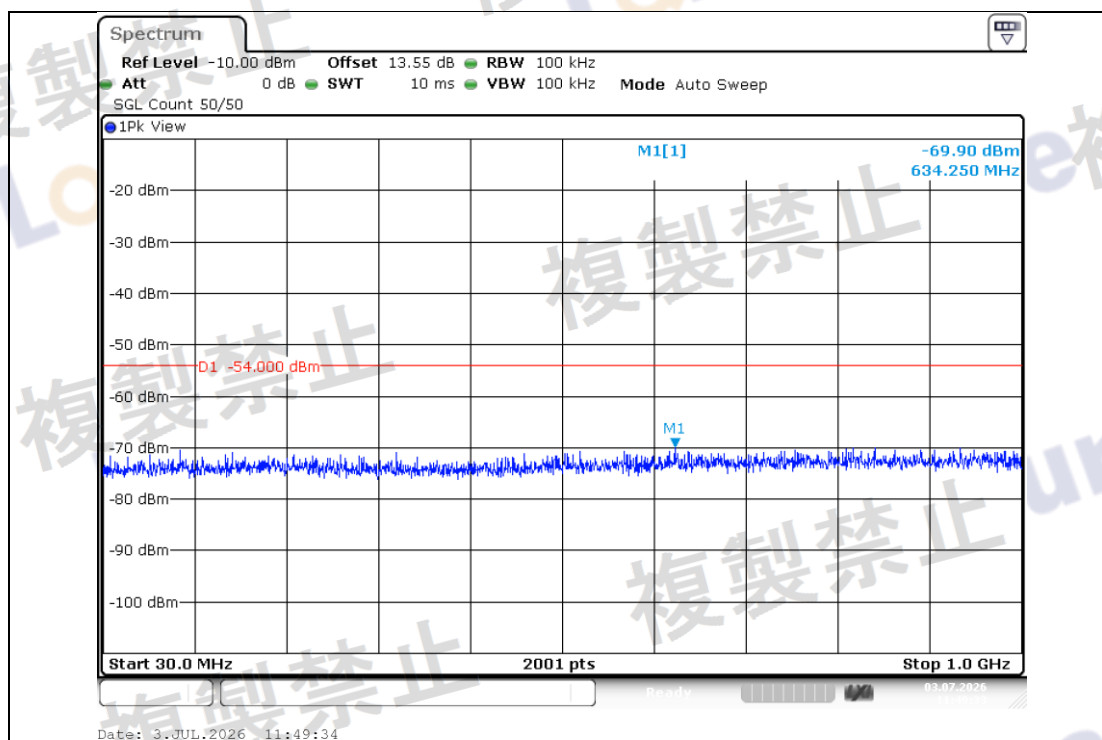


NTNV-11N40-Ant1-2442-1000~13000-PASS

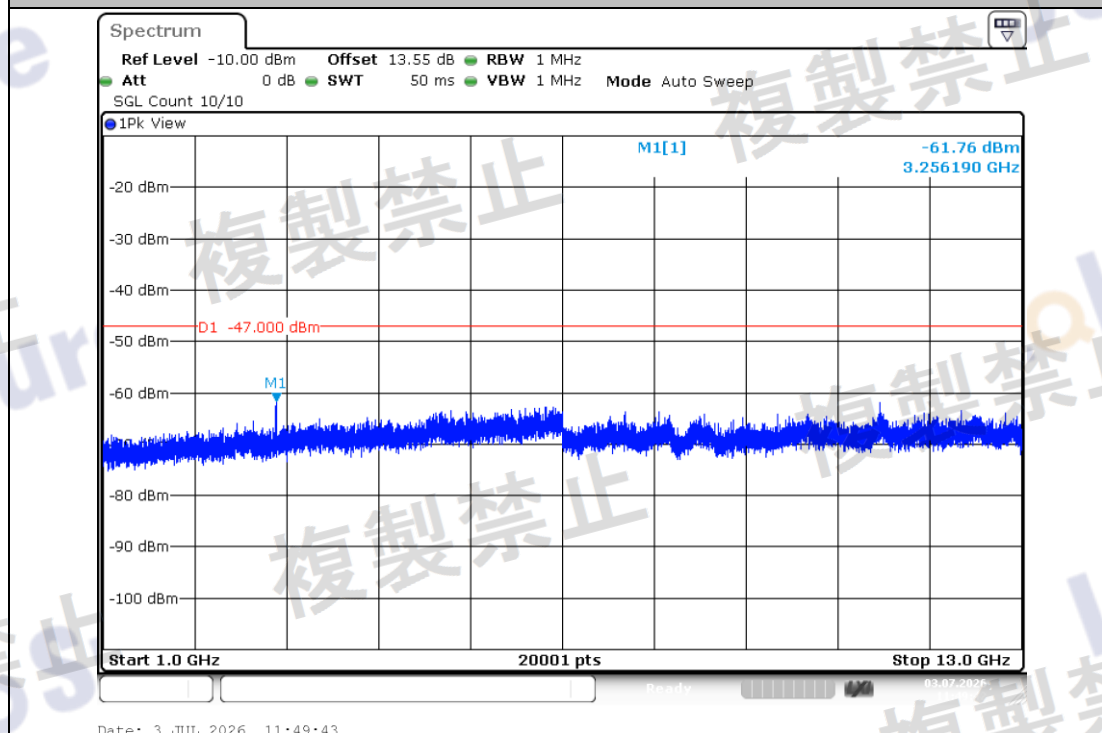

NTNV-11N40-Ant1-2462-30~1000-PASS

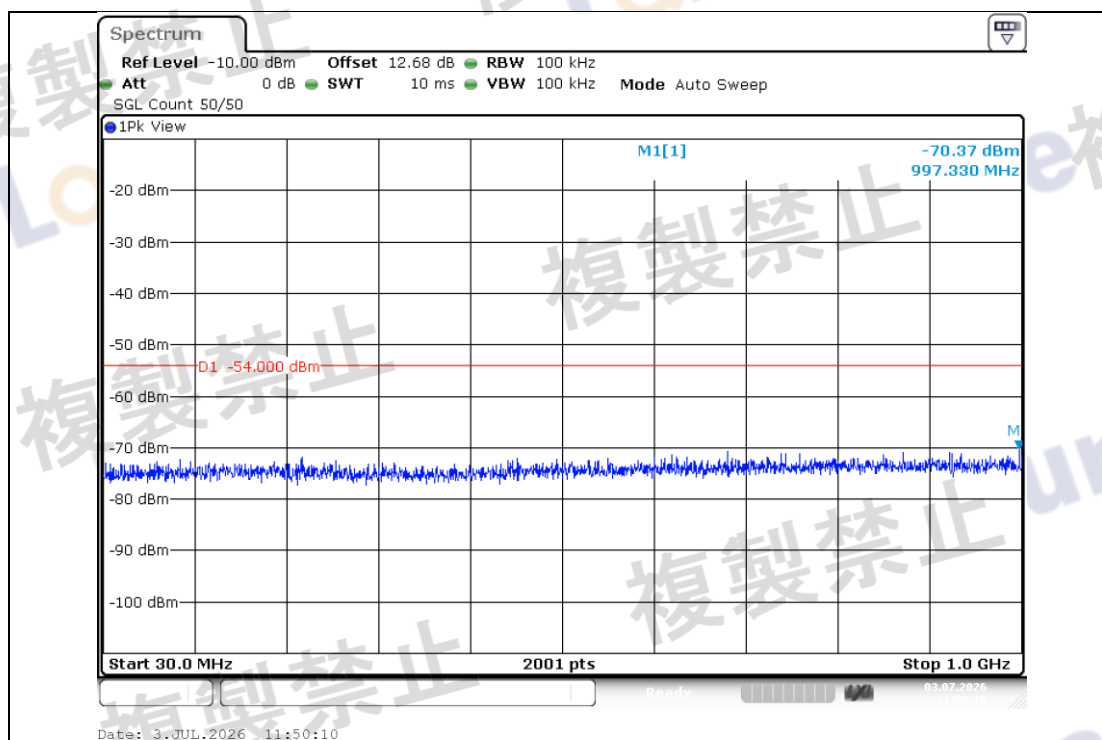

NTNV-11N40-Ant1-2462-1000~13000-PASS

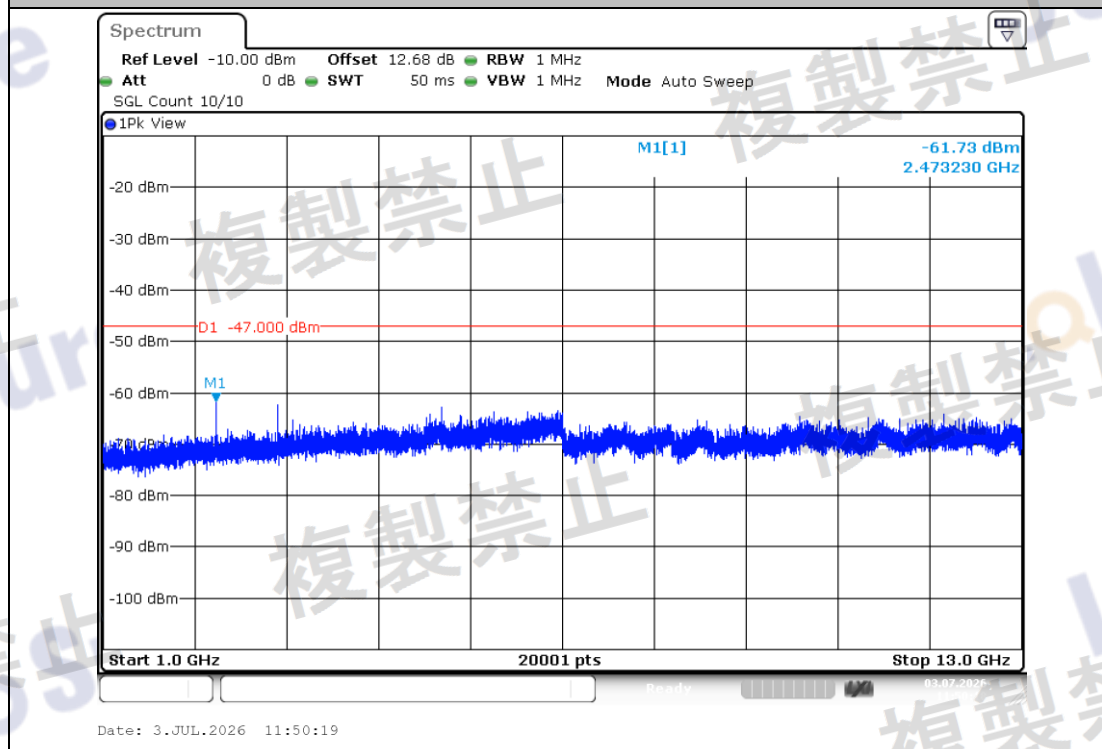

Appendix H: Carrier Sense Function

Test Result

TestCondition	TestMode	Antenna	Frequen cy[MHz]	Pcs[dBm]	Result	Verdict
NTNV	11N40	Ant1	2422	-41.18	Good	PASS

Note: $Pcs (dBm) = 22.79 + Gr - 20\log(F)$.

Test Graphs

