

Zhong Shan City Richsound Electronic Industrial Ltd
No. 16 Shagang East Road, Gangkou Town, Zhongshan, China

Product Information:

Model Name	U392D RX PCB Antenna
Date	2025-12-31

Contents

1、 Specification.....3

1.1 Electrical specification standard.....3

1.1.1 Electrical Specifications..... 3

1.1.2 Antenna Matching Network.....3

2、 Test.....3

2.1 Test of passive S11.....4

2.1.1 Test connection.....4

2.1.2 Passive S11.....4

2.2 Gain and efficiency test.....4

2.2.1 Test Position.....4

2.2.2 Test equipment.....4

2.2.3 Results Summary.....5

2.2.4 Radiation Pattern Results.....5

2.3 OTA test.....6

2.3.1 Results Summary.....6

3、 Conclusion.....7

1、Specification

This report mainly provides the testing status of various electrical and structural performance parameters of U392D RX Antenna.

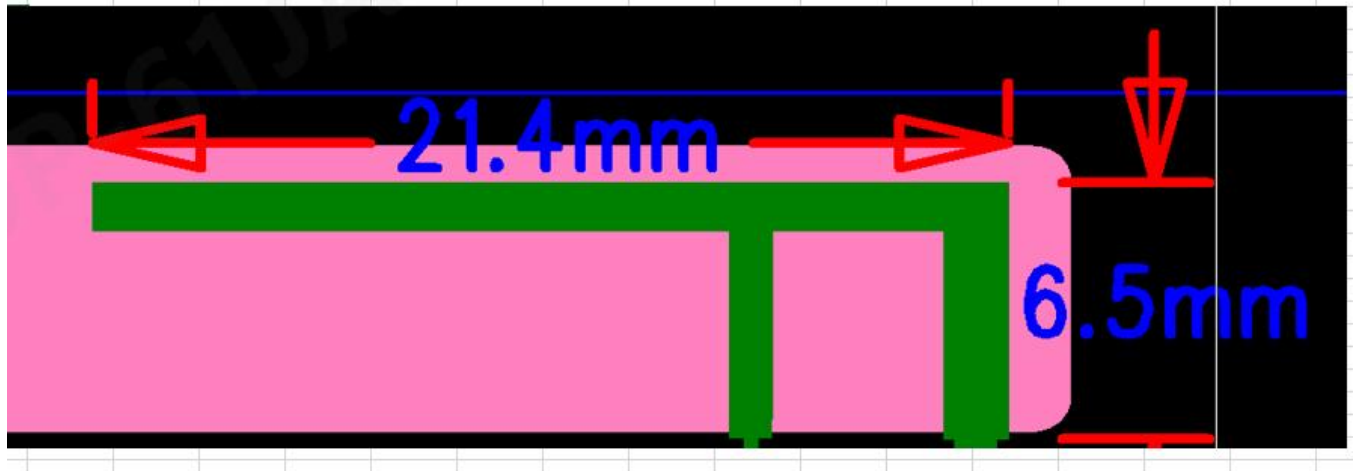


Figure 1 Antenna


1.1 Electrical specification standard

1.1.1 Electrical Specifications

The antenna operates in the 2400-2500 MHz. The following table is the electrical performance index of the antenna designed by our company.

Antenna	U392D RX Antenna
Frequency Range	2400-2500MHz
VSWR	< 2.0
Efficiency	>50%
Impedance	50 ohm
Polarization	Linear polarization

1.1.2 Antenna Matching Network

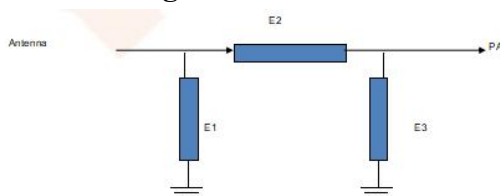

Element	Value
E1(0402)	1.0PF
E2(0402)	0Ω
E3(0402)	NC

2、Test

The antenna was debugged and tested with the prototype provided by the customer.

2.1 Test of passive S11


2.1.1 Test connection

The passive S11 test device is connected as follows: Network Analyzer → Test Line → Test Fixture.

2.1.2 Passive S11

The following table shows the standing wave ratio values of the edge frequency points of the antenna operating frequency band. The waveform of Return Loss and VSWR obtained by the test is shown as follows.

Frequency (MHz)	2400	2440	2480
VSWR	1.31	1.18	1.33
Return Loss	-17.39	-21.86	-16.99

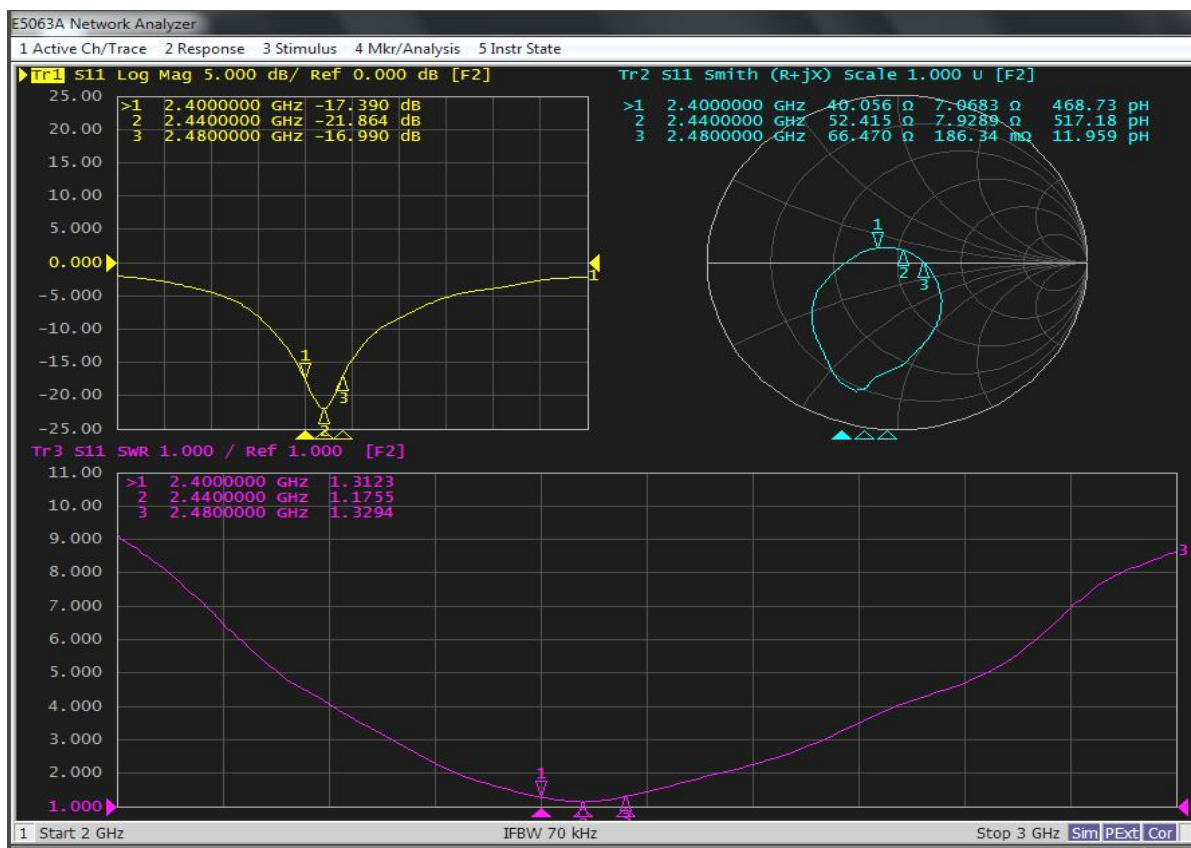

2.2 Gain and efficiency test

2.2.1 Test Position

Microwave anechoic chamber, the test frequency range is 400MHz-6GHz.

2.2.2 Test equipment


Network analyzer, standard horn antenna, multi-probe near field antenna test system, test computer, etc

2.2.3 Results Summary

In the microwave anechoic chamber, the measured values related to efficiency and gain are shown in the table below.

Frequency (MHz)	Gain (dBi)	Efficiency (%)
2400	2.36	51.02
2410	2.25	51.36
2420	2.20	52.22
2430	2.09	52.45
2440	2.14	52.21
2450	2.13	51.99
2460	2.11	51.70
2470	2.13	51.89
2480	2.07	51.72
2490	2.02	51.83
2500	1.98	51.90

2.2.4 Radiation Pattern Results

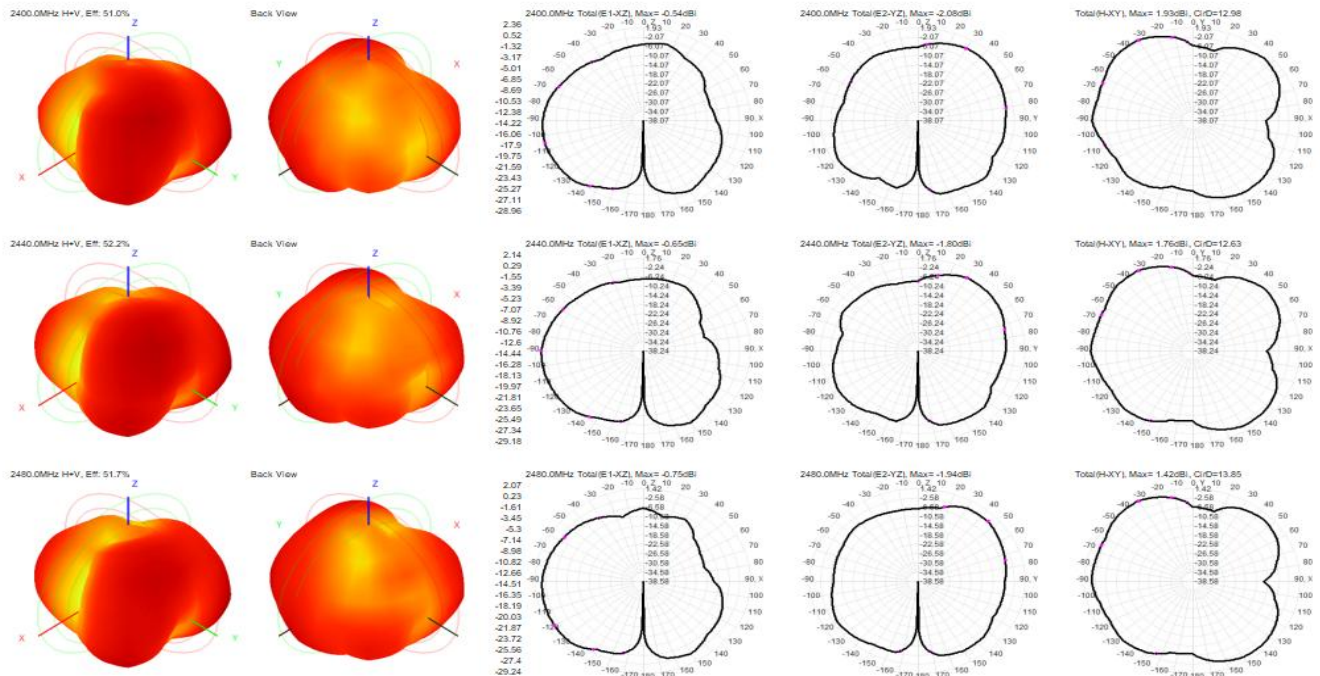

2.3 OTA test

2.3.1 Results Summary

Channels	TRP (dBm)	TIS (dBm)
0	15.03	-90.96
39	16.2	-90.7
78	14.52	-90.48

3、 Conclusion

This antenna is designed on the basis of the prototype provided by the customer. The above electrical performance parameters are tested under the environmental treatment conditions of the test prototype. The electrical parameters and structural performance have met the technical requirements. Please confirm!