



Antenn	Frequency	Texture	Performance requirement
speaker	2400-2480MHz	Ceramic3216	

All the information contained in this report is copyrighted by Waleet. Please do not distribute it to any third party!

Antenna terminal matching circuit:

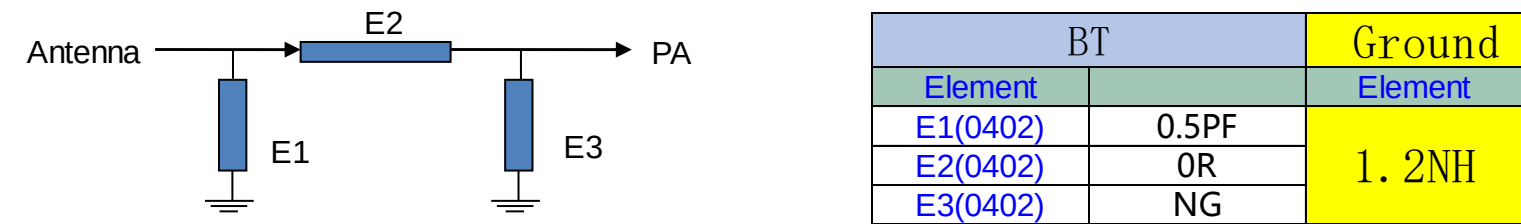


Antenna passive S11 parameter testing:

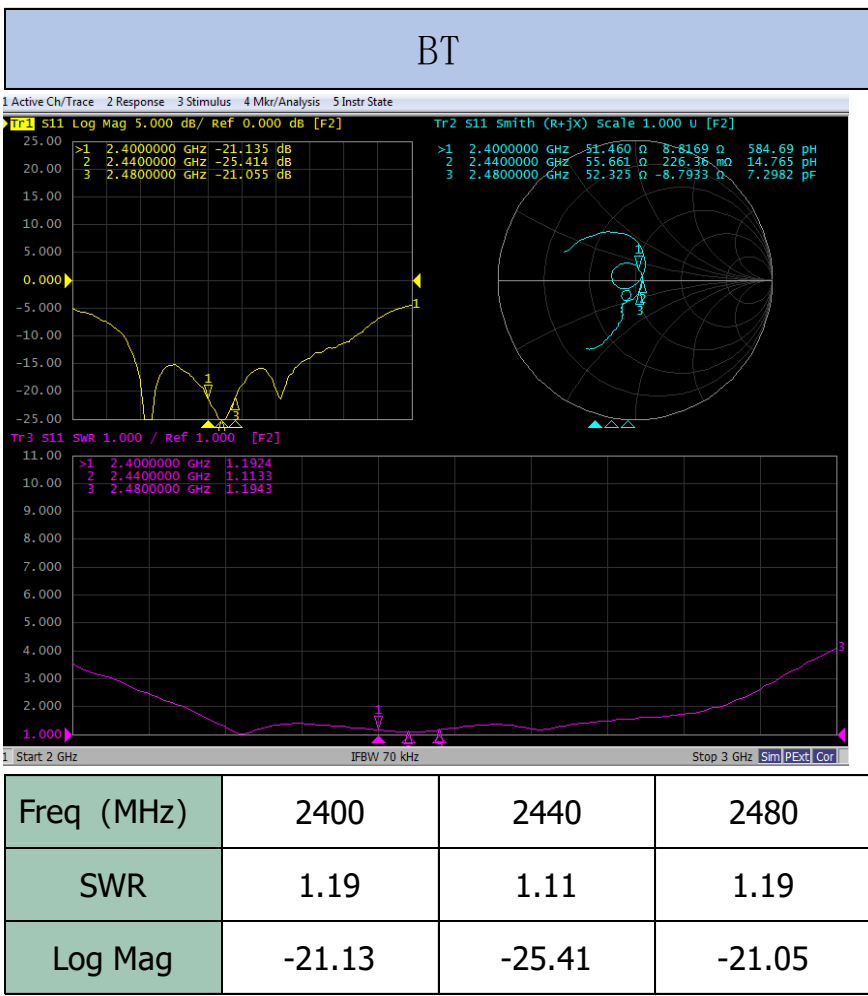

Antenna passive efficiency and gain testing:

BT		
Frequency (MHz)	Gain (dB)	Efficiency (%)
2400	1.12	45.10%
2410	1.26	47.60%
2420	1.11	46.50%
2430	1.20	45.30%
2440	1.32	44.00%
2450	1.48	42.90%
2460	1.58	42.50%
2470	1.77	43.80%
2480	1.79	43.40%
2490	1.82	43.70%
2500	1.73	43.20%

Antenna passive efficiency and gain test - Antenna passive radiation pattern:

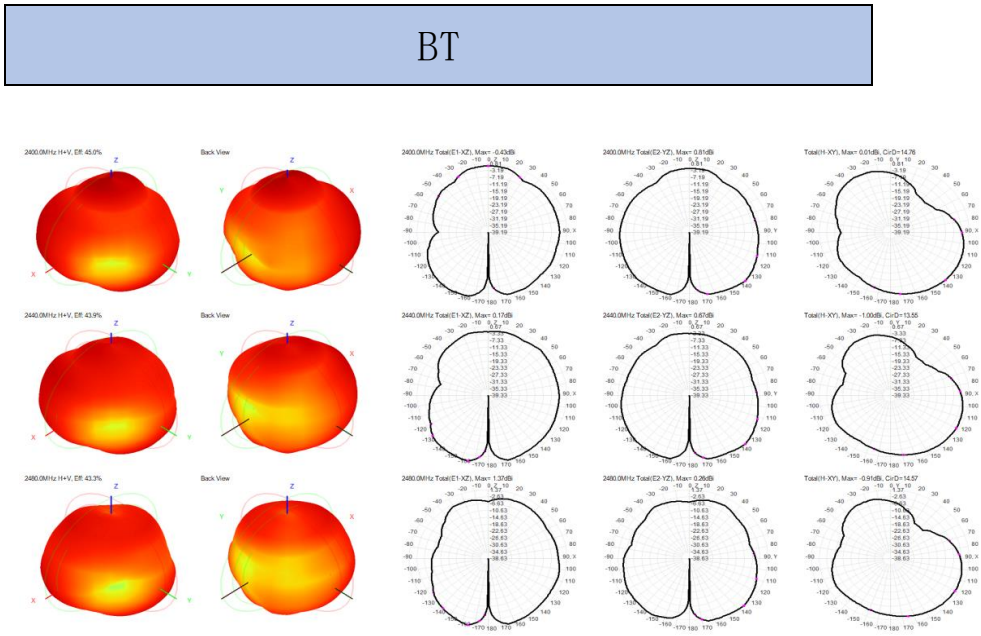

ANT Photo

