



TEST REPORT

Subject: Processing Gain For the ORINOCO IEEE802.11b products

Ref.: FCC Rules 47 CFR Part 15, Section 5.247d

Report Prepared by:

Maarten Visse
Name



Signature

July 28, 2000
Date

Concurrence:

1. Director of Engineering

Bruce Tuch
Name

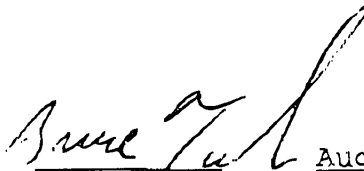
Signature

August 10, 2000
Date


Name

Signature

Date

2. Team Captain

Frans Hoekstra
Name

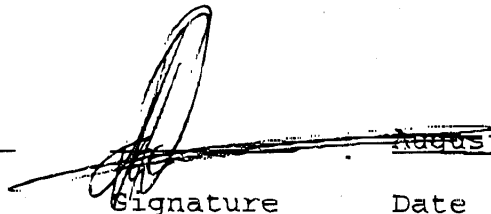
Signature

August 10, 2000
Date

Name

Signature

Date



TEST REPORT

Subject: Processing Gain For the ORiNOCO IEEE802.11b products

Ref.: FCC Rules 47 CFR Part 15, Section 5.247d

Report Prepared by:

Maarten Vissee
Name

Signature

July 28, 2000
Date

Concurrence:

1. Director of Engineering

Bruce Tuch

Name

Signature

August 10, 2000

Date

2. Team Captain

Frans Hoekstra

Name

Signature

August 10, 2000

Date

1. Summary:

This document describes the Receiver Processing Gain verification measurements performed at the WaveLAN-II PC-Card Type 2, according to Ref.[2].

2. Conclusion:

The Lucent WaveLAN-II PC-Card Type 2 product confirms to the minimum required 10 dB processing gain, as set forth by the FCC for operation in the 2.4 GHz ISM band.

3. References:

- 1- Document FCC 97-114, Appendix C, Guidance on Measurements for Direct Sequence Spread Spectrum Systems.
- 2- Hardware Functional Specification for WaveLAN-II Embedded, High Speed, Doc. No. 011735, Rev. A, Source Organization Lucent Technologies WCND Utrecht.
- 3- Viterbi, A. J., Principles of Coherent Communications, New York, McGraw-Hill 1966.
- 4- Proakis, J.G., Digital Communications, New York, McGraw-Hill 1989, page 270.

4. Measurement description:

4.1 Test introduction - FCC requirements:

Part of FCC certification for the Lucent WaveLAN IEEE 802.11 High Speed compliant Network Interface Card (NIC) is a processing gain test. This test proves that the receiver of the tested product employs a true spread spectrum device receiver structure, taking full advantage of the direct sequence spread spectrum modulation technique.

This test verifies the receiver processing gain to be 10 dB or more for a data rate of 1, 2, 5.5 and 11 Mbit/s, by monitoring the Bit Error Rate (BER) of the product under test for each data rate, while operating under strict defined received signal conditions.

Several methods of showing compliance to the rules are possible, from a stepped CW jammer to a continuous sweeping CW interferer. For this test the discrete stepped CW jammer method was chosen, as described in Ref.[1].

Therefore a receiver input signal is applied to the product under test, in the presence of a Continuous Wave (CW) interference source, also referred to as CW jammer.

The test takes place at the product Functional Specification (Ref.[2]) specified conditions for BER rate measurements, specifying a BER equal or better than 10^{-8} at a receiver input level of -55 dBm. For practical reasons these test are performed at -55 dBm or -53 dBm. This small deviation from the Functional Specification should not cause any deviation from the specified Bit Error Rate, since the received levels are well above the thermal noise.

The test criteria for meeting the minimal processing gain is such that it takes the theoretical calculated SNR for the applied modulation technique and specified BER as a reference. From this given SNR the processing gain is subtracted, yielding the CW Jammer to Signal ratio J/S. From Ref. [4], likewise as Ref.[3] consulted in Ref. [1], it is determined that for a BER of 10^{-8} the SNR (S/N) equals:

13 dB @ 1 Mbit/s,
15 dB @ 2 Mbit/s,
15 dB @ 5.5 Mbit/s,
18 dB @ 11 Mbit/s.

Thus the J/S ratio for a processing gain of 10 dB that must be met is calculated as:

-13 + 10 = -3 dB @ 1 Mbit/s (DBPSK),
-15 + 10 = -5 dB @ 2 Mbit/s (DQPSK),
-15 + 10 = -5 dB @ 5.5 Mbit/s (CCK),
-18 + 10 = -8 dB @ 11 Mbit/s (CCK).

Two types of measurement corrections are allowed for as described in Ref.[1]. The first taking into account 2 dB implementation losses, thus increasing the absolute J/S ratio by 2 dB.

The second correction allows for deleting the 20% worst-case frequencies in the processing gain test that causes the test at that CW interference to fail. This implies that for the considered 14 MHz wide measurement interval the worst case 57 CW jammer frequencies can be ignored, being those that result in received data errors/missing frames (20% of 14 MHz * (1 MHz/50 KHz) + 1 = (20% * 281) + 1 = 57).

4.2 Test sequence:

The measurements are performed at a 50 KHz CW jammer raster. For each CW jammer frequency 10^8 bits are transmitted by the reference transmitter, and received by the product under test. For practical reasons 50.000 messages are transmitted. After blanking out frame overhead 1927 bits per frame are monitored. This results in $50.000 * 1927 = 9650000$ transmitted bits for a BER test, which is a mere 1.4% less than the targeted 10^8 bits. Though it would be more elegant to show BER compliance for at least say ten times 10^8 transmitted/received bits, the time involved with this grows significantly. Since the CW interferer is stepped in a 50 KHz raster, covering the receiver bandwidth of 14 MHz, it is considered that the BER requirement is sufficiently met since such a multitude of measurements are taken.

The total measurement is being performed under computer control, hereafter referred to as controller. It involves the control over the reference transmitter, CW-interference generator, receiver under test and received data error-checker/frame counter. The controller is programmed by a configuration file, that lists the CW jammer frequencies and CW jammer signal levels. The controller program flow chart is given in Annex A, WaveLAN-II FCC Processing Gain Measurements, Controller Flow Chart.

The transmitted data pattern is fixed, and known at the receiver. Therefore the error checker compares the known transmitted data sequence with received data sequence. Received data errors and missing received frames information is retrieved by the controller.

In the receiver at the inter-connection between the received data demodulator output at the DSP and the digital interface the demodulated received RF signal is made available to an error checker. This error checker is a dedicated piece of hardware that monitors real-time the received data, gating-out any other non-relevant information that is present in the received data (message header, message length field, CRC field, diagnostic information field etc.). For a chosen Tx message length of 230 bytes this yields 1927 useable bits.

The test sequence is as follows: the controller issues a request to the transmitter for 1000 frames to be transmitted. Once this number of frames has been transmitted the transmitter signals to the controller the completion of this. The controller reads the number of received frames and number of erroneous received frames. If there are no missing frames or received data errors detected, the controller increases the CW interference level by 1 dB. Consequently it re-issues a

FCC Processing Gain Measurements Results,
for the OriNOCO IEEE802.11b products, Report No. 015127, Rev. A.

Lucent WCND Confidential ©2000

1000 frames transmit request, and the test is re-started. This sequence is repeated until received data errors or missing frames are detected.

Now instead of a quick error scan using 1000 frames, 50000 frames (equals 10^8 bits) are transmitted to verify the BER. For this test the CW jammer level is lowered 1 dB, compared to the CW jammer level at which the first receive data errors and/or missing frames were detected. All the measurement results are recorded for later use.

After completion of the 50000 frames BER test, the spreading gain verification test continues by raising the CW jammer frequency by 50 KHz and re-setting the CW jammer level to the start value, taken from the controller configuration file. For this new CW frequency the measurements are repeated as described above (see Annex A).

All CW frequencies and power levels are listed in a command-file that is read by the controller at start up.

Before measurements are started, the receiver input level and CW jammer level need to be calibrated. See figure 1 for the test set-up.

The test takes place at an arbitrarily chosen channel, being channel two (2417 MHz).

4.3 Receiver level calibration:

The receiver input level is calibrated using the RF power meter. For this purpose, the reference transmitter output attenuator is set to 0 dB. The CW jammer is disabled during the calibration. Using the RF power meter at the receiver input of the device under test, the received level at the receiver input is measured for a continuous active reference transmitter. The attenuator value is calculated to achieve a received level of -55 dBm. Finally the attenuator is adjusted to this value.

4.4 CW level calibration:

The reference transmitter is disabled during this calibration. The CW jammer generator output level is set to 0 dBm, and the RF power meter value is read. The difference in CW output level setting and RF power meter measured at receiver input of the device under test is the attenuation of the test set-up. This is the correction factor that needs to be applied for analysis of the measurements results.

5. Equipment used:

# Item needed	Description
1	Portable PC with WaveLAN-II NIC, Zenith Z-lite, SN-3GSAZW000061, for receiver.
1	Portable PC with WaveLAN-II NIC, NCR 3150, SN 17-26106224, for transmitter.
1	Software 'Testware, V5.09', Rev. 0, <TW.EXE>, 141456 bytes, 12-13-1998. Used for the transmitter and receiver.
2	WaveLAN IEEE Turbo NIC.
1	PC + IEEE interface card, NCR PC6, SN 17-17039925 and CEC PC<>488 interface card.
1	Received error checker, wire-wrap prototype, Lucent WCND designed and built.
1	Power supply, Delta D030-1, for error checker.
1	Spectrum Analyzer, HP 9592B SN 3009U00102.
1	Power Meter, Rohde & Schwarz, Millivolt meter URV5, SN 893430/070.
1	Power Sensor, Rhode & Schwarz, type NRV-Z2 828218.02, SN 860925/005.
1	CW jammer generator, Gigatronics 7200, SN 746604.
1	Variable attenuator, 0-70 dB, Midwest Microwave, Model 1044.
2	Fixed attenuator, 10 dB, Inmet Corp., model 18AH-10.
1	RF power splitter, ARRA 3-9200-2, SN 2001.
1	Misc. IEEE cabling.
1	Misc. SMA cabling.
1	RF shielded cage.

6. Measurement set_up:

The test setup is given below in Figure 1, measurement test set-up. To avoid interference that can disrupt the measurement, the whole test is performed within a RF shielded cage.

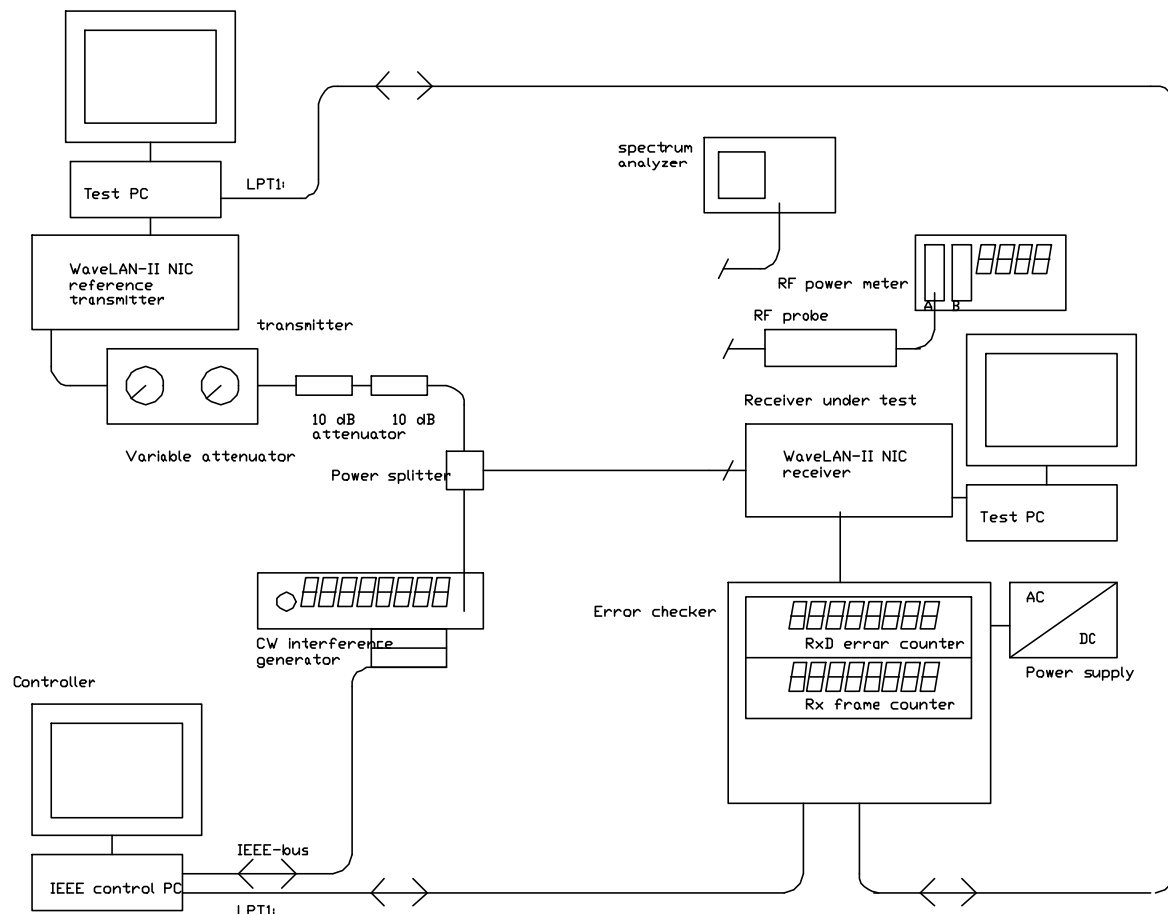


Figure 1, measurement test set-up.

7. Measurement results:

7.1 Calibrations:

Receiver calibration 1, 2, 5.5 and 11 Mbit/s: For 0 dB total attenuator setting the received level at the receiver input equals +10 dBm.

Test setting: the fixed attenuator is chosen to be 20 dB, the variable attenuator is set to 45, respectively 43 dB attenuation.

CW jammer generator calibration: For a 0 dBm output level at the generator the received level at the receiver input is -6 dBm.

7.2 Processing Gain Measurement Results:

For each CW jammer frequency between $F_c \pm 7$ MHz, being the receiver bandwidth, a BER measurement is taken.

For each CW measurement frequency the jammer level is varied from -66 dBm to -58 dBm at the receiver input, yielding a J/S ratio of -11 to -3 dB, respectively -13 to -5 dB.

For some CW frequencies received data errors/missing frames are detected while performing the BER test.

Applying the allowed margin of 2 dB implementation losses for 1 Mbit/s, a 1 dB implementation loss for 5.5 and 11 Mbit/s, and no implementation loss for 2 Mbit/s, together with the rule of discarding the 20% worst-case jamming/signal points (Ref.[1]), results in meeting the specified BER for which less than 20% of the measured CW interference frequencies were found to cause received data errors and/or missing frames.


These percentage numbers are respectively 16% @ 1 Mbit/s, 3% @ 2 Mbit/s, 17% @ 5.5 Mbit/s and 18% @ 11 Mbit/s.

Therefore, a J/S ratio better or equal to -5 dB @ 1 Mbit/s, -5 dB @ 2 Mbit/s, -7 dB @ 5.5 Mbit/s and -9 dB @ 11 Mbit/s is measured.

7.3 Measurement Conclusion:

The tested product complies to the required Processing Gain of 10 dB for a data rate of 1, 2, 5.5 and 11 Mbit/s, as set forth in Ref.[1].

Annex A: Flow-Chart IEEE control program

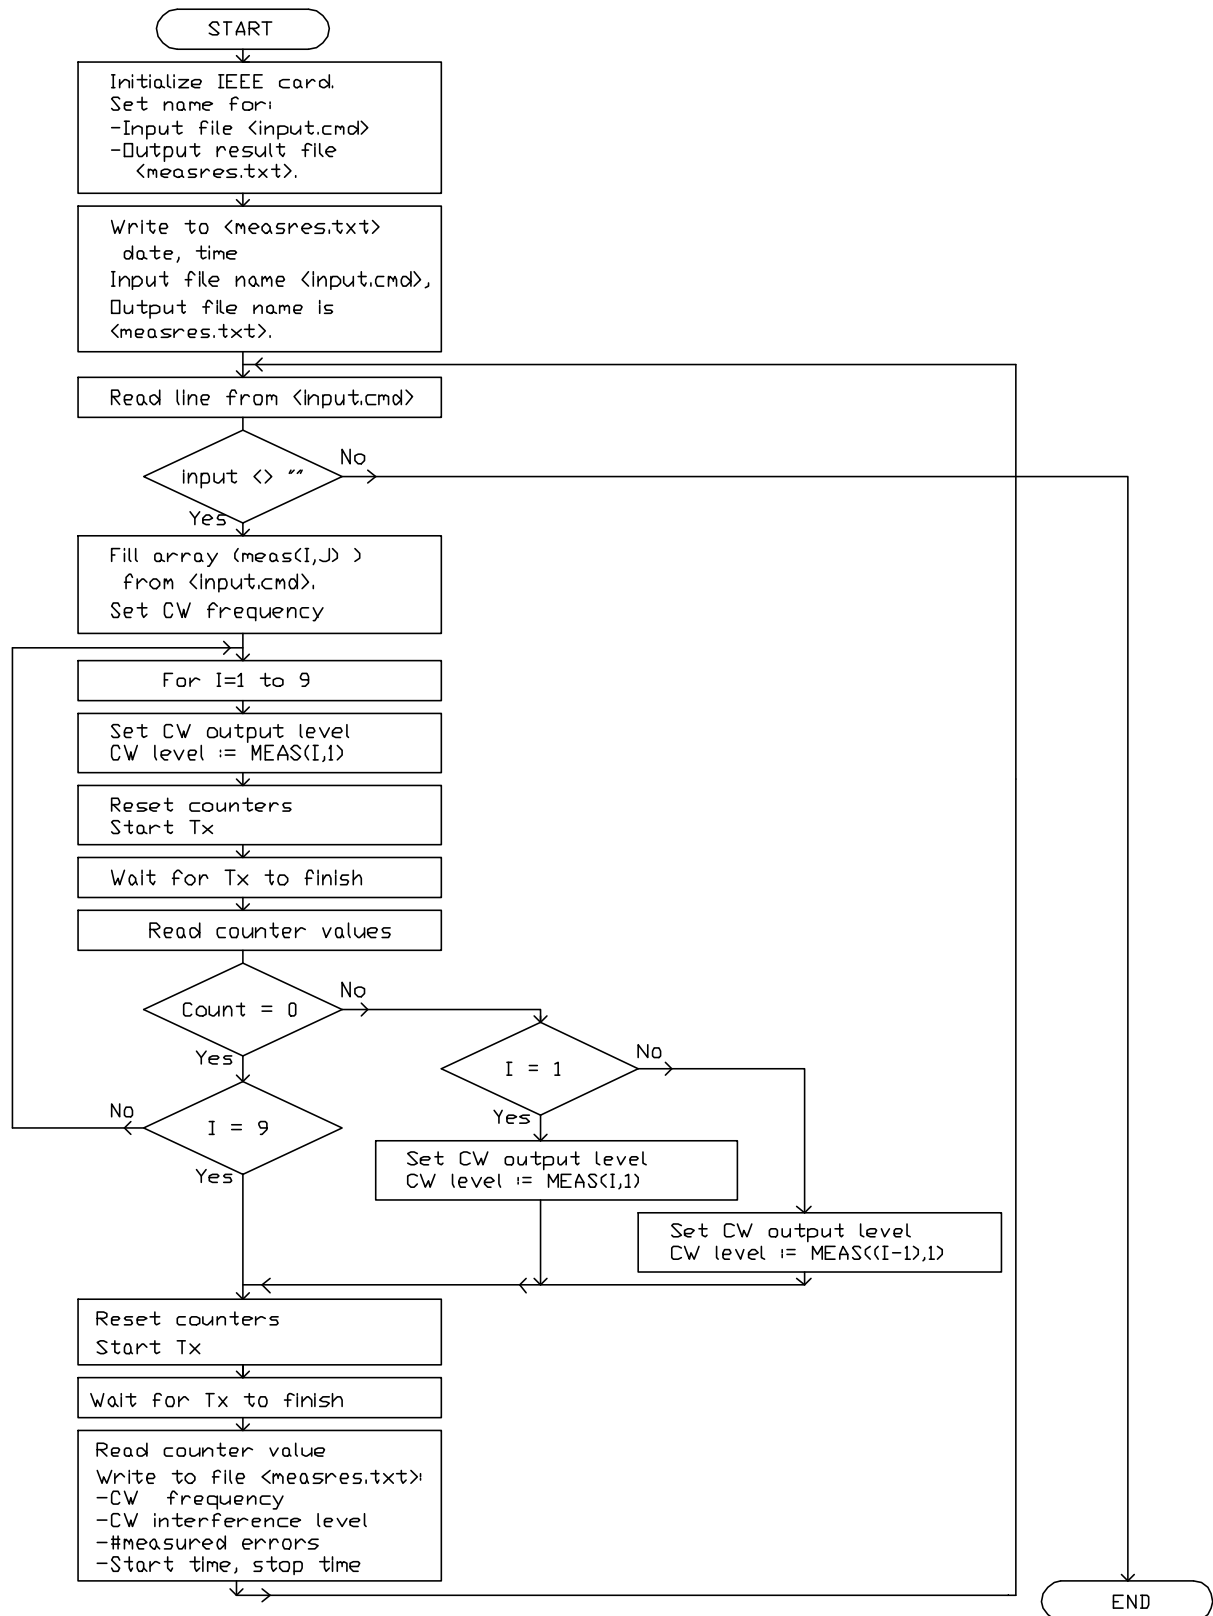

Annex B : Process gain data at 11Mbps and 2Mbps

- Tests were performed at Spreading gain 10.4 dB. Engineering took extra margin.
- At 11Mbps S/N may be 18 dB, 2Mbps S/N may be 15 dB.
- SIR (Signal Interference Ratio) = S/N + Spreading gain + Lsys. (= -Mj)
We take only 1 dB Lsys for 11Mb/s or 0 dB Lsys for 2Mb/s into account so that :
11Mbps SIR = 18 dB - 10.4 dB + 1 = 8.6 (round of f upwards to 9) dB = (-)Mj
With this 9 dB SIR (= -9 dB Mj) we test unit and check for less than 20% errors
(Acutually 18.57%),

2Mbps SIR = 15 dB - 10.4 dB + 0 = 4.6 (round of f upwards to 5) dB = (-)Mj
With this 5 dB SIR (= -5 dB Mj) we test unit and check for less than 20% errors,
(Acutually 3.21%).

Thus in principle exact calculations in this case are :

Processing gain for **11Mbps** = S/N + Mj + Lsys = 18 + (-)8.6 + 1 = **10.4** dB

Processing gain for **2Mbps** = S/N + Mj + Lsys = 15 + (-)4.6 + 0 = **10.4** dB

[illegible]

Measurement file output name is: 11mbit.cnd

Measurement file output name is:

Input command file name is

Input CW correction level:

Input CSV connection level:

LOWCOUNT IS:

0000

0001

0002

0003

0004

0005

0006

0007

0008

0009

0010

0011

0012

0013

0014

0015

0016

0017

0018

0019

0020

0021

0022

0023

0024

0025

0026

0027

0028

0029

0030

0031

0032

0033

0034

0035

0036

0037

0038

0039

0040

0041

0042

0043

0044

0045

0046

0047

0048

0049

0050

0051

0052

0053

0054

0055

0056

0057

0058

0059

0060

0061

0062

0063

0064

0065

0066

0067

0068

0069

0070

0071

0072

0073

0074

0075

0076

0077

0078

0079

0080

0081

0082

0083

0084

0085

0086

0087

0088

0089

0090

0091

0092

0093

0094

0095

0096

0097

0098

0099

0100

0101

0102

0103

0104

0105

0106

0107

0108

0109

0110

0111

0112

0113

0114

0115

0116

0117

0118

0119

0120

0121

0122

0123

0124

0125

0126

0127

0128

0129

0130

0131

0132

0133

0134

0135

0136

0137

0138

0139

0140

0141

0142

0143

0144

0145

0146

0147

0148

0149

0150

0151

0152

0153

0154

0155

0156

0157

0158

0159

0160

0161

0162

0163

0164

0165

0166

0167

0168

0169

0170

0171

0172

0173

0174

0175

0176

0177

0178

0179

0180

0181

0182

0183

0184

0185

0186

0187

0188

0189

0190

0191

0192

0193

0194

0195

0196

0197

0198

0199

0200

0201

0202

0203

0204

0205

0206

0207

0208

0209

0210

0211

0212

0213

0214

0215

0216

0217

0218

0219

0220

0221

0222

0223

0224

0225

0226

0227

0228

0229

0230

0231

0232

0233

0234

0235

0236

0237

0238

0239

0240

0241

0242

0243

0244

0245

0246

0247

0248

0249

0250

0251

0252

0253

0254

0255

0256

0257

0258

0259

0260

0261

0262

0263

0264

0265

0266

0267

0268

0269

0270

0271

0272

0273

0274

0275

0276

0277

0278

0279

0280

0281

0282

0283

0284

0285

0286

0287

0288

0289

0290

0291

0292

0293

0294

0295

0296

0297

0298

0299

0300

0301

0302

0303

0304

0305

0306

0307

0308

0309

0310

0311

0312

0313

0314

0315

0316

0317

0318

0319

0320

0321

0322

0323

0324

0325

0326

0327

0328

0329

0330

0331

0332

0333

0334

0335

0336

0337

0338

0339

0340

0341

0342

0343

0344

0345

0346

0347

0348

0349

0350

0351

0352

0353

0354

0355

0356

0357

0358

0359

0360

0361

0362

0363

0364

0365

0366

0367

0368

0369

0370

0371

0372

0373

0374

0375

0376

0377

0378

0379

0380

0381

0382

0383

0384

0385

0386

0387

0388

0389

0390

0391

0392

0393

0394

0395

0396

0397

0398

0399

0400

0401

0402

0403

0404

0405

0406

0407

0408

0409

0410

0411

0412

0413

0414

0415

0416

0417

0418

0419

0420

0421

0422

0423

0424

0425

0426

0427

0428

0429

0430

0431

0432

0433

0434

0435

0436

0437

0438

0439

0440

0441

0442

0443

0444

0445

0446

0447

0448

0449

0450

0451

0452

0453</

Highcount is:

Rx level DUT is: -53 dBm

Note: 11 Mbit, 9 dB SIR tested for (18 dB SNR - 10.4 + 1 impl. losses).

Takes into account 1 dB of implementation loss (allowed 2 dB).

Only Rx/D errors are taken into account since these need better SIR than preamble at 1 Mbit/s.

Attention: Insert the red call for correct spreadsheet calculations

Attention: Input the red cells for correct spreadsheet calculations:

total errors

percentage 18.57%

OK? =<20% OK

Number of received data errors as a function of frequency and interference level

Number of received data errors as a function of frequency and interference level

≤ 20% OK

≤20% OK

	Uncorrected Interference level dialed at CW generator																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	</
--	---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----

[illegible]