



Channel 20402 (824.2MHz)

Frequency Range : 9kHz ~ 1GHz

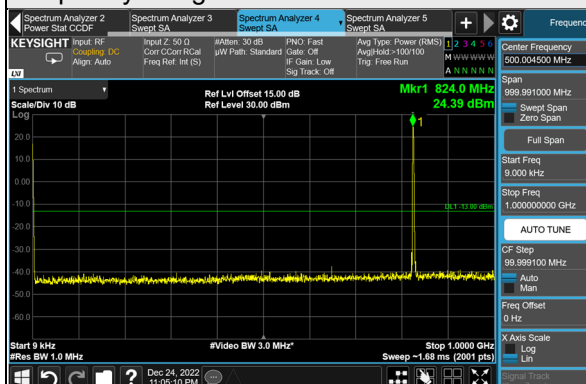


Frequency Range : 1GHz ~ 10GHz

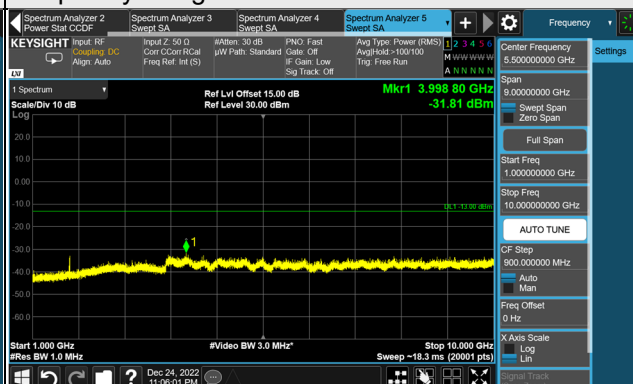


Channel 20525 (836.5MHz)

Frequency Range : 9kHz ~ 1GHz

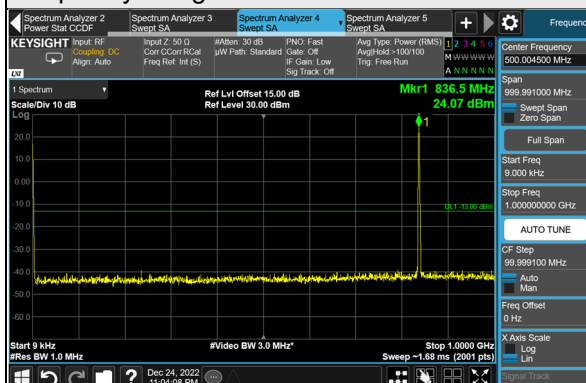


Frequency Range : 1GHz ~ 10GHz

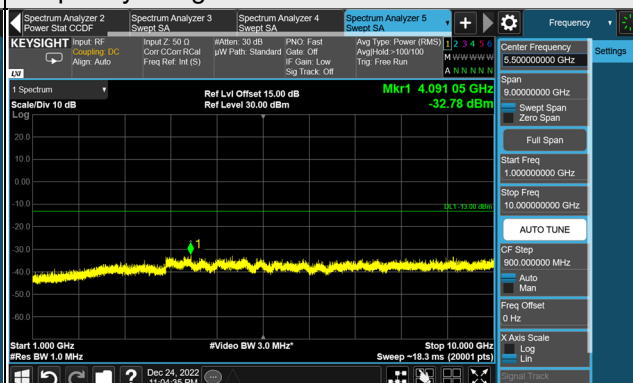


Channel 20648 (848.8MHz)

Frequency Range : 9kHz ~ 1GHz

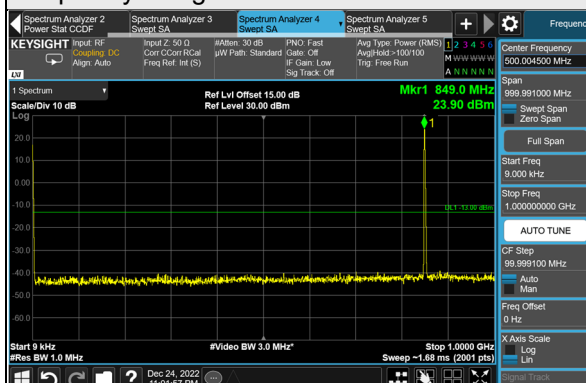

Frequency Range : 1GHz ~ 10GHz

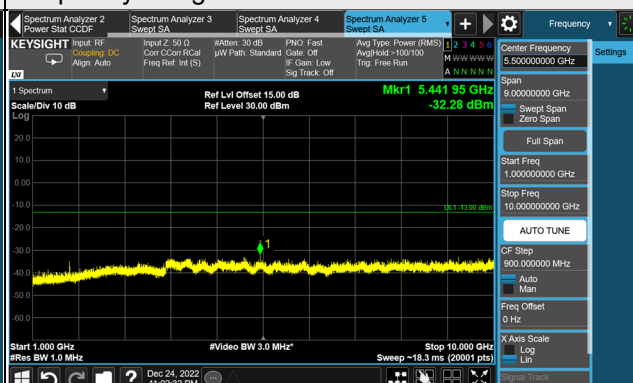

*The 9kHz signal over the limit is from Spectrum.

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.8.2 Test Procedure

- a. In the semi-anechoic chamber, EUT placed on the 0.8m(below or equal 1GHz) and/or 1.5m(above 1GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following C63.26 section 5.5 and 5.2.7
 - $\text{EIRP (dBm)} = E (\text{dB}\mu\text{V/m}) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.
 - $\text{ERP (dBm)} = E (\text{dB}\mu\text{V/m}) + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.
2. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:
The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

For radiated emission 30MHz to 1GHz

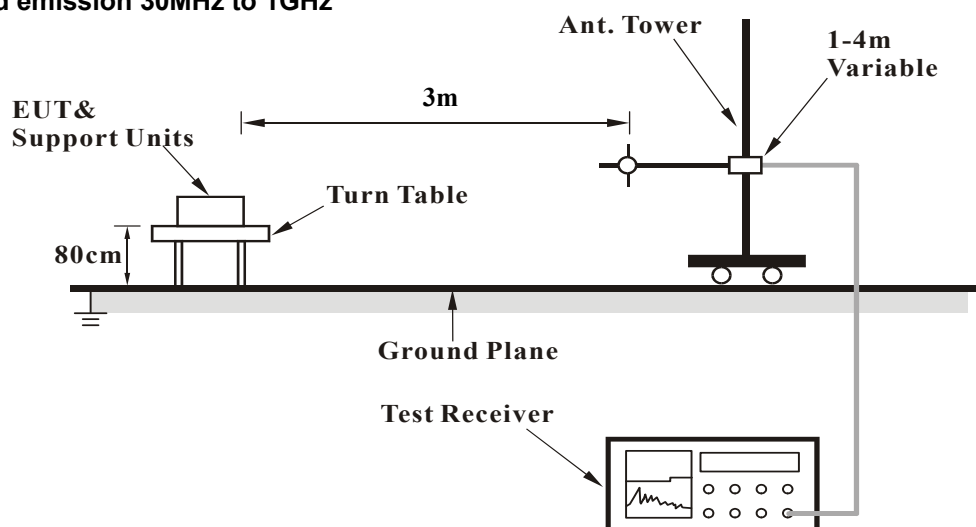

For radiated emission above 1GHz

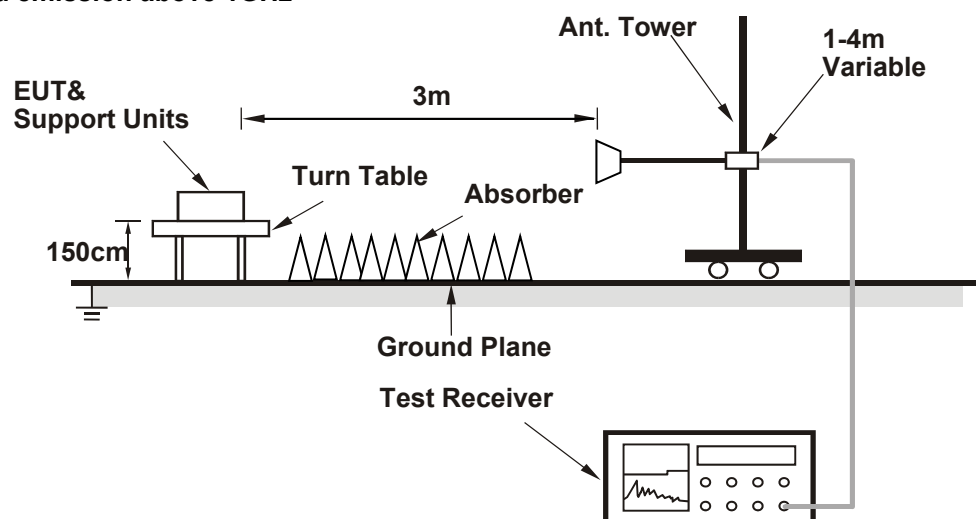

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

Below 1GHz


GPRS

Mode	TX channel 189 (836.4MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	46.49	-46.08	-13.00	-33.08	3.78 H	258	63.56	-109.64
2	179.38	-51.18	-13.00	-38.18	1.05 H	83	60.19	-111.37
3	362.71	-50.61	-13.00	-37.61	2.02 H	247	57.21	-107.82
4	480.08	-57.29	-13.00	-44.29	2.38 H	71	47.51	-104.80
5	600.36	-56.01	-13.00	-43.01	3.87 H	2	46.77	-102.78
6	838.01	-52.53	-13.00	-39.53	2.60 H	54	46.36	-98.89

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

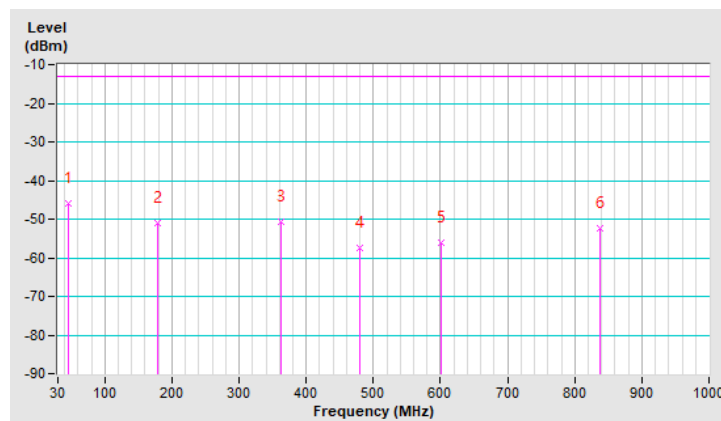


Mode	TX channel 189 (836.4MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.43	-43.90	-13.00	-30.90	1.98 V	229	65.73	-109.63
2	82.38	-47.45	-13.00	-34.45	3.39 V	260	67.28	-114.73
3	186.17	-49.35	-13.00	-36.35	3.84 V	138	62.77	-112.12
4	305.48	-46.67	-13.00	-33.67	2.61 V	314	62.38	-109.05
5	600.36	-60.11	-13.00	-47.11	3.92 V	116	42.67	-102.78
6	839.95	-56.43	-13.00	-43.43	2.53 V	308	42.47	-98.90

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

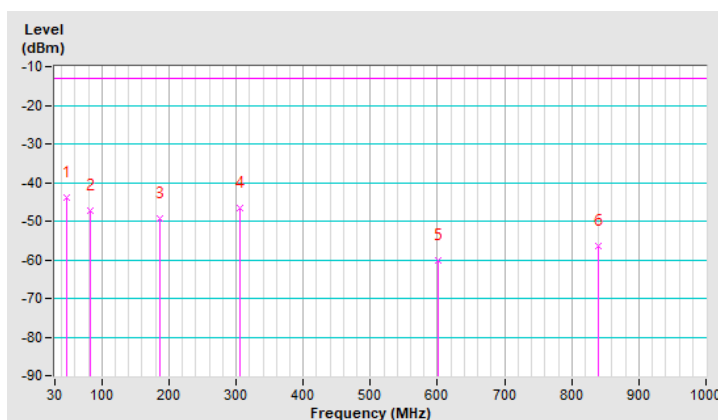


EDGE

Mode	TX channel 251 (848.8MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 71%RH	Input Power	120Vdc, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.82	-57.10	-13.00	-44.10	2.99 H	236	53.20	-110.30
2	185.20	-54.80	-13.00	-41.80	1.50 H	46	57.30	-112.10
3	385.99	-52.50	-13.00	-39.50	1.50 H	109	54.70	-107.20
4	575.14	-57.00	-13.00	-44.00	2.99 H	143	46.50	-103.50
5	719.67	-53.60	-13.00	-40.60	1.50 H	5	47.30	-100.90
6	1000.00	-51.70	-13.00	-38.70	2.99 H	44	45.70	-97.40

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

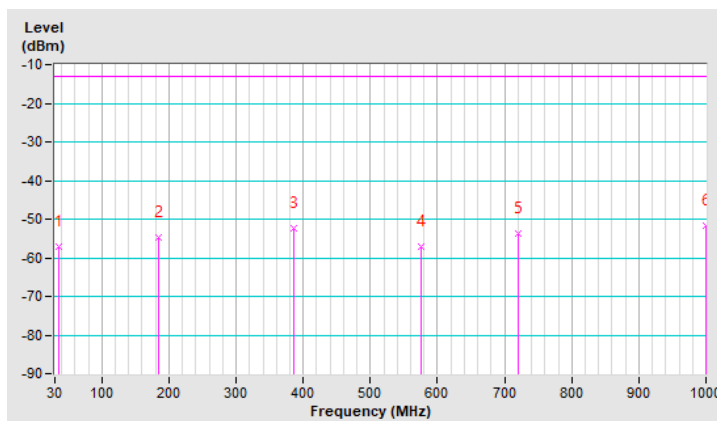


Mode	TX channel 251 (848.8MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 71%RH	Input Power	120Vdc, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.64	-51.30	-13.00	-38.30	1.51 V	2	58.50	-109.80
2	137.67	-55.10	-13.00	-42.10	1.51 V	208	55.30	-110.40
3	285.11	-49.80	-13.00	-36.80	3.00 V	276	59.60	-109.40
4	387.93	-59.50	-13.00	-46.50	1.51 V	2	47.70	-107.20
5	704.15	-61.10	-13.00	-48.10	1.51 V	1	40.00	-101.10
6	900.09	-56.00	-13.00	-43.00	1.51 V	58	42.60	-98.60

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

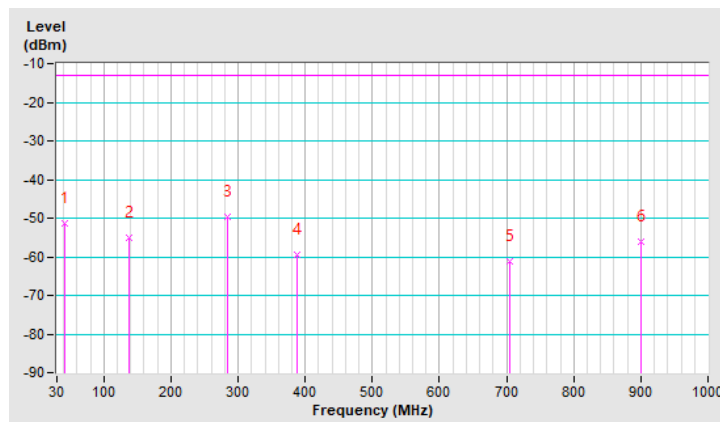

eMTC


LTE Band 5, Channel Bandwidth 1.4MHz

Mode	TX channel 20407 (824.7MHz),	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.16	-46.76	-13.00	-33.76	2.71 H	186	63.43	-110.19
2	129.91	-52.53	-13.00	-39.53	2.94 H	189	58.29	-110.82
3	305.48	-54.35	-13.00	-41.35	1.45 H	168	54.70	-109.05
4	378.23	-51.85	-13.00	-38.85	3.34 H	223	55.42	-107.27
5	600.36	-59.40	-13.00	-46.40	1.96 H	104	43.38	-102.78
6	891.36	-58.50	-13.00	-45.50	3.86 H	138	40.02	-98.52

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

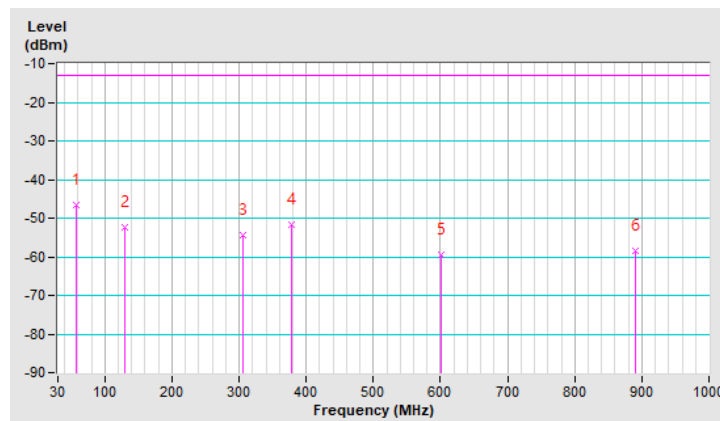


Mode	TX channel 20407 (824.7MHz),	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	47.46	-44.71	-13.00	-31.71	2.89 V	122	64.96	-109.67
2	184.23	-52.43	-13.00	-39.43	2.57 V	78	59.50	-111.93
3	321.97	-51.28	-13.00	-38.28	3.14 V	210	57.33	-108.61
4	480.08	-61.74	-13.00	-48.74	1.29 V	349	43.06	-104.80
5	640.13	-61.11	-13.00	-48.11	3.42 V	294	40.70	-101.81
6	910.76	-57.74	-13.00	-44.74	1.05 V	31	40.55	-98.29

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

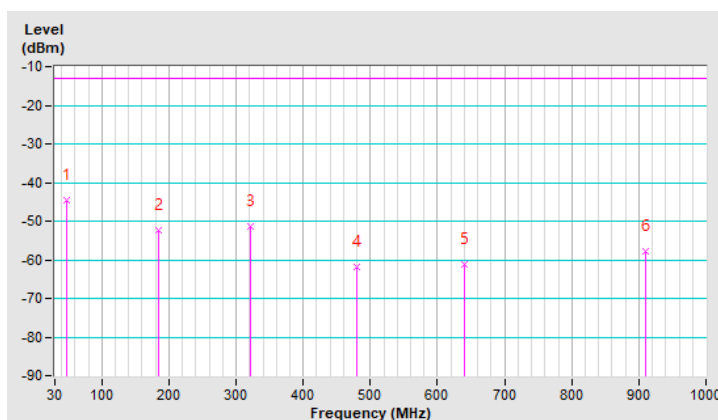


LTE Band 26, Channel Bandwidth 1.4MHz

Mode	TX channel 26915 (836.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	75.59	-49.45	-13.00	-36.45	3.21 H	48	63.59	-113.04
2	184.23	-52.90	-13.00	-39.90	1.95 H	102	59.03	-111.93
3	305.48	-54.36	-13.00	-41.36	2.64 H	176	54.69	-109.05
4	383.08	-52.54	-13.00	-39.54	1.48 H	259	54.63	-107.17
5	600.36	-59.29	-13.00	-46.29	2.60 H	44	43.49	-102.78
6	839.95	-56.91	-13.00	-43.91	1.15 H	87	41.99	-98.90

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

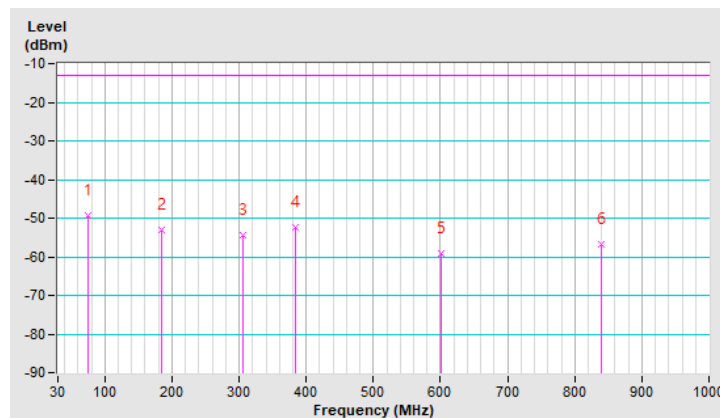


Mode	TX channel 26915 (836.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.43	-43.43	-13.00	-30.43	1.27 V	73	66.20	-109.63
2	97.90	-47.91	-13.00	-34.91	2.91 V	228	66.61	-114.52
3	182.29	-53.91	-13.00	-40.91	3.49 V	150	57.79	-111.70
4	293.84	-49.00	-13.00	-36.00	2.45 V	283	60.32	-109.32
5	636.25	-60.94	-13.00	-47.94	1.45 V	36	40.97	-101.91
6	839.95	-56.21	-13.00	-43.21	1.90 V	306	42.69	-98.90

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

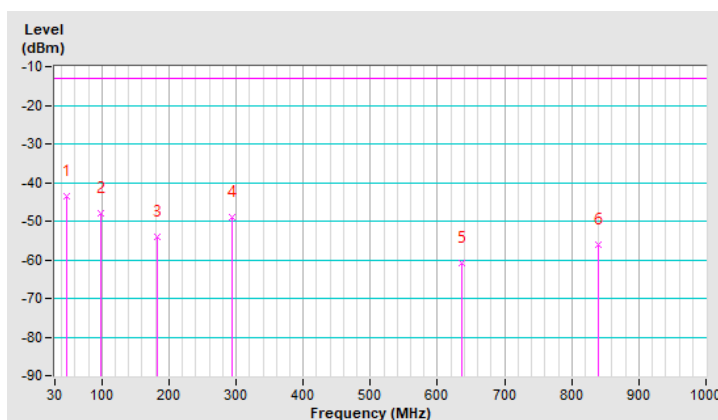


NB-IoT Band 5, Subcarrier Spacing 15kHz

Mode	TX channel 20525 (836.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	56.19	-47.71	-13.00	-34.71	3.92 H	19	62.25	-109.96
2	94.02	-55.02	-13.00	-42.02	1.51 H	166	60.06	-115.08
3	180.35	-52.05	-13.00	-39.05	3.31 H	55	59.46	-111.51
4	356.89	-52.25	-13.00	-39.25	2.34 H	261	55.74	-107.99
5	540.22	-59.77	-13.00	-46.77	1.43 H	222	43.94	-103.71
6	839.95	-56.41	-13.00	-43.41	1.69 H	162	42.49	-98.90

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

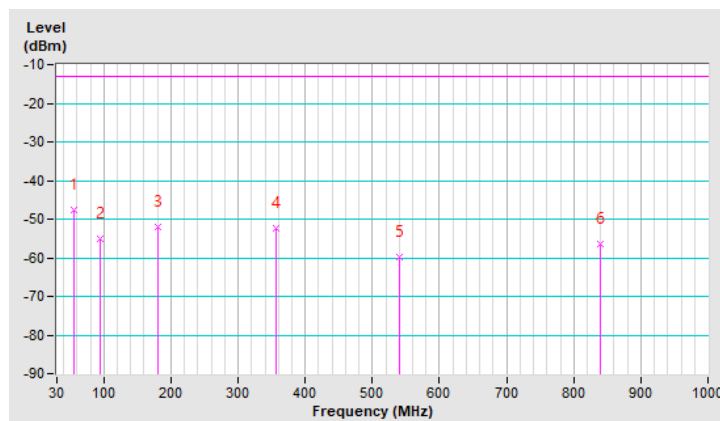


Mode	TX channel 20525 (836.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	47.46	-43.74	-13.00	-30.74	2.68 V	21	65.93	-109.67
2	96.93	-51.02	-13.00	-38.02	2.56 V	76	63.51	-114.53
3	131.85	-51.72	-13.00	-38.72	2.22 V	208	59.06	-110.78
4	299.66	-47.34	-13.00	-34.34	1.28 V	248	61.84	-109.18
5	540.22	-60.35	-13.00	-47.35	1.21 V	220	43.36	-103.71
6	839.95	-56.95	-13.00	-43.95	1.88 V	340	41.95	-98.90

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

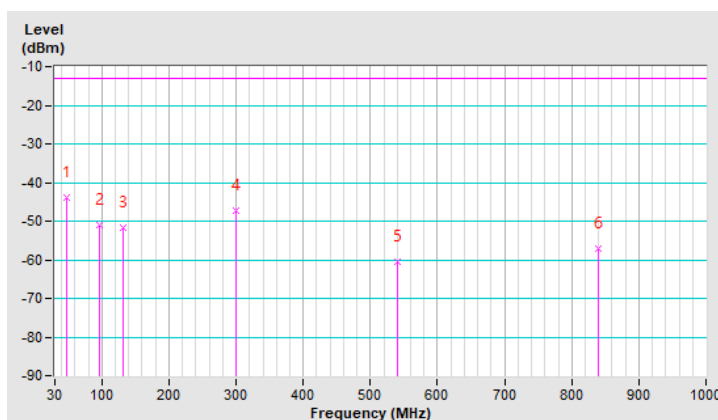

Above 1GHz

GPRS

Mode	TX channel 128 (824.2MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	22deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1648.40	-46.41	-13.00	-33.41	2.32 H	174	71.79	-118.20
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1648.40	-46.14	-13.00	-33.14	1.63 V	274	72.06	-118.20

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 189 (836.4MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	22deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1672.80	-45.92	-13.00	-32.92	1.46 H	228	72.28	-118.20
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1672.80	-45.66	-13.00	-32.66	1.23 V	287	72.54	-118.20

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 251 (848.8MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	22deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1697.60	-46.24	-13.00	-33.24	2.63 H	154	71.96	-118.20
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1697.60	-45.97	-13.00	-32.97	1.52 V	237	72.23	-118.20

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

EDGE

Mode	TX channel 128 (824.2MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	22deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1648.40	-48.64	-13.00	-35.64	2.32 H	174	69.56	-118.20
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1648.40	-48.71	-13.00	-35.71	1.63 V	274	69.49	-118.20

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 189 (836.4MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	22deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1672.80	-48.90	-13.00	-35.90	1.46 H	228	69.30	-118.20
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1672.80	-48.25	-13.00	-35.25	1.23 V	287	69.95	-118.20

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 251 (848.8MHz)	Frequency Range	1GHz ~ 10GHz
Environmental Conditions	22deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1697.60	-48.42	-13.00	-35.42	2.63 H	154	69.78	-118.20
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1697.60	-47.30	-13.00	-34.30	1.52 V	237	70.90	-118.20

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

eMTC

LTE Band 5, Channel Bandwidth 1.4MHz

Mode	TX channel 20407 (824.7MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1649.40	-50.81	-13.00	-37.81	1.69 H	341	67.39	-118.20
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1649.40	-48.37	-13.00	-35.37	1.24 V	37	69.83	-118.20

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 20525 (836.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-50.84	-13.00	-37.84	3.36 H	132	67.36	-118.20
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-49.80	-13.00	-36.80	1.64 V	156	68.40	-118.20

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 20643 (848.3MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1696.60	-50.87	-13.00	-37.87	1.82 H	261	67.33	-118.20
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1696.60	-50.13	-13.00	-37.13	2.82 V	173	68.07	-118.20

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

LTE Band 5, Channel Bandwidth 5MHz

Mode	TX channel 20425 (826.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.00	-51.39	-13.00	-38.39	1.24 H	90	66.81	-118.20
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.00	-49.38	-13.00	-36.38	2.83 V	323	68.82	-118.20

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 20525 (836.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-51.01	-13.00	-38.01	1.30 H	332	67.19	-118.20
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-48.82	-13.00	-35.82	2.27 V	200	69.38	-118.20

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 20625 (846.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.00	-51.98	-13.00	-38.98	3.95 H	258	66.22	-118.20
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.00	-49.44	-13.00	-36.44	2.19 V	151	68.76	-118.20

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

LTE Band 5, Channel Bandwidth 10MHz

Mode	TX channel 20450 (829.0MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1658.00	-53.12	-13.00	-40.12	1.30 H	233	65.08	-118.20
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1658.00	-50.82	-13.00	-37.82	2.08 V	258	67.38	-118.20

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 20525 (836.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-51.77	-13.00	-38.77	2.71 H	162	66.43	-118.20
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-49.76	-13.00	-36.76	1.61 V	158	68.44	-118.20

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 20600 (844.0MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1688.00	-52.66	-13.00	-39.66	2.74 H	42	65.54	-118.20
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1688.00	-49.28	-13.00	-36.28	3.31 V	130	68.92	-118.20

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

LTE Band 26, Channel Bandwidth 1.4MHz

Mode	TX channel 26797 (824.7MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1649.40	-51.29	-13.00	-38.29	1.70 H	327	66.91	-118.20
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1649.40	-49.75	-13.00	-36.75	1.10 V	145	68.45	-118.20

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 26915 (836.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-50.62	-13.00	-37.62	2.20 H	282	67.58	-118.20
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-49.32	-13.00	-36.32	1.11 V	341	68.88	-118.20

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 27033 (848.3MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1696.60	-51.57	-13.00	-38.57	3.53 H	147	66.63	-118.20
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1696.60	-49.53	-13.00	-36.53	1.63 V	251	68.67	-118.20

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

LTE Band 26, Channel Bandwidth 5MHz

Mode	TX channel 26815 (826.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.00	-50.74	-13.00	-37.74	2.53 H	211	67.46	-118.20
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.00	-49.42	-13.00	-36.42	3.30 V	154	68.78	-118.20

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 26915 (836.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-50.71	-13.00	-37.71	3.17 H	92	67.49	-118.20
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-49.38	-13.00	-36.38	1.54 V	250	68.82	-118.20

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 27015 (846.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.00	-51.21	-13.00	-38.21	2.60 H	150	66.99	-118.20
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1693.00	-50.36	-13.00	-37.36	2.49 V	164	67.84	-118.20

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

LTE Band 26, Channel Bandwidth 15MHz

Mode	TX channel 26865 (831.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1663.00	-50.85	-13.00	-37.85	2.23 H	175	67.35	-118.20
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1663.00	-49.57	-13.00	-36.57	2.31 V	78	68.63	-118.20

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 26915 (836.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-51.35	-13.00	-38.35	1.97 H	164	66.85	-118.20
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-50.23	-13.00	-37.23	2.42 V	104	67.97	-118.20

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

Mode	TX channel 26965 (841.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1683.00	-51.05	-13.00	-38.05	2.11 H	173	67.16	-118.21
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1683.00	-49.34	-13.00	-36.34	1.73 V	74	68.87	-118.21

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

NB-IoT Band 5, Subcarrier Spacing 15kHz

Mode	TX channel 20402 (824.2MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1648.40	-53.93	-13.00	-40.93	1.62 H	157	64.27	-118.20
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1648.40	-51.97	-13.00	-38.97	2.13 V	287	66.23	-118.20

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 20525 (836.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-53.74	-13.00	-40.74	1.63 H	286	64.46	-118.20
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1673.00	-51.70	-13.00	-38.70	1.25 V	320	66.50	-118.20

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 20648 (848.8MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 71%RH	Input Power	120Vac, 60Hz
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1697.60	-55.33	-13.00	-42.33	2.32 H	178	62.87	-118.20
Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1697.60	-52.50	-13.00	-39.50	1.63 V	207	65.70	-118.20

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---