


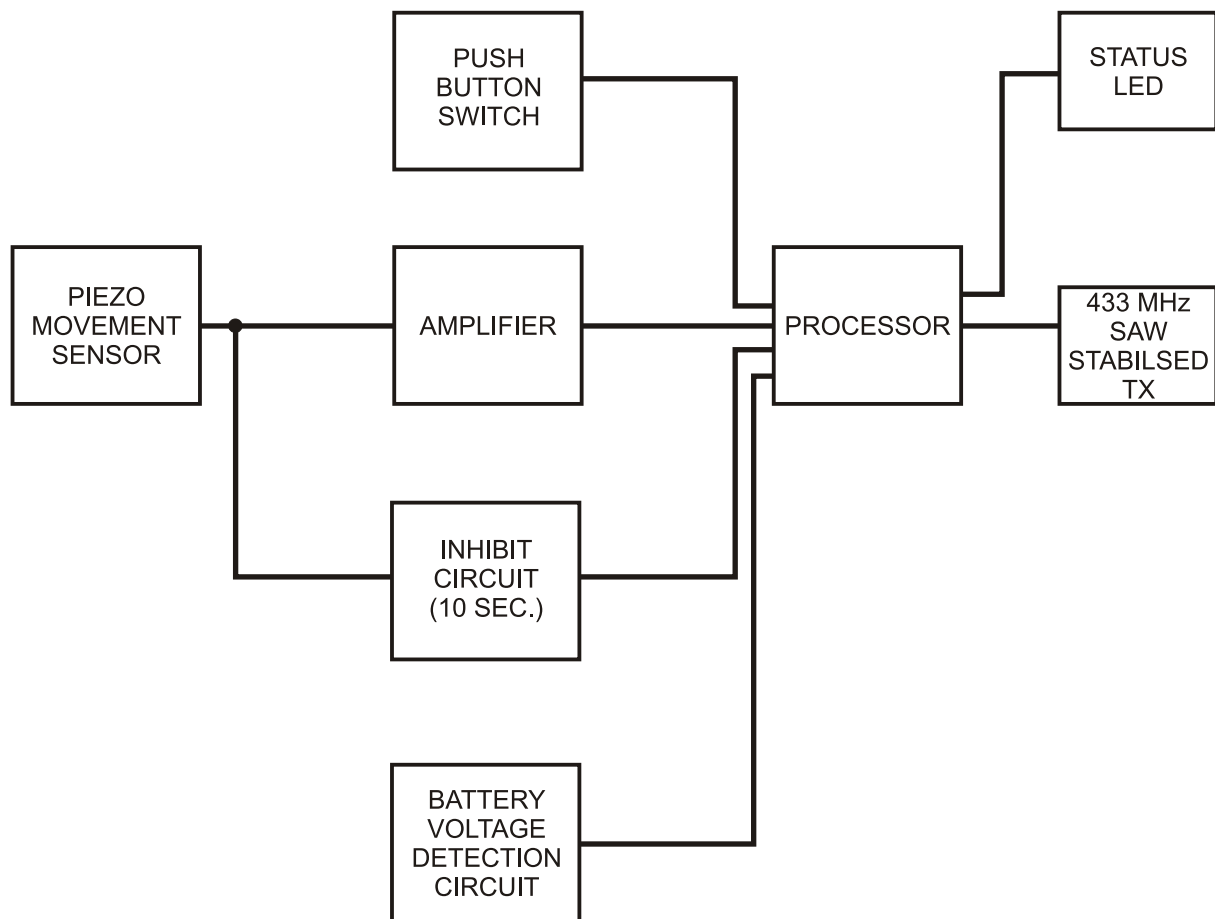

In terms of the functional description:

BZ1 is a ceramic piezo element against which a 4mm steel ball runs. The voltage generated is amplified by TR1, and the logic is switched to the processor pin 7 via TR3.

TR2 has 2 functions in that it is a pulse stretcher, and also has the 10 second inhibit function.

Upon receipt of a pulse from TR3, Pin 6 of the processor pulse hi momentarily to charge C1 via D1. C1 holds TR2 on until discharged via R4.

Upon receipt of a pulse on Pin 8, Pin 3 of the processor modulates the RF oscillator via R13. The oscillator frequency is SAW stabilised at 433.92 MHz by SAW1.

TR4 is a battery voltage detection circuit, which is monitored on pin 5 of the processor, and low battery voltage is indicated on the LED.

The transmitter can also be enabled by depressing switch 1.

PFK

ELECTRONICS

P.O. BOX 3660, DURBAN, 4000
488 UMBILO RD, DURBAN
4001, SOUTH AFRICA

TEL : (031) 2054310
FAX : (031) 2054324
E-MAIL : pfk@eastcoast.co.za