



802.11a Power Spectral Density - Ant 0


Channel 36 (5180MHz)

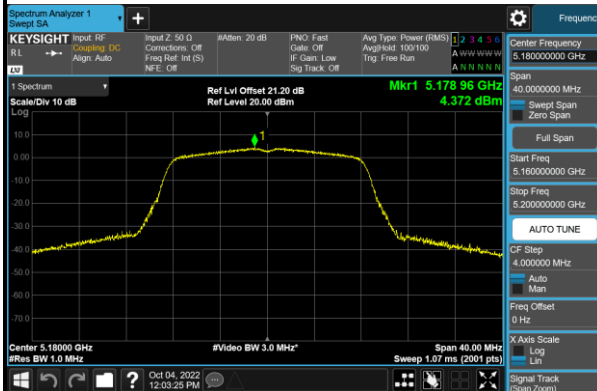


Channel 44 (5220MHz)

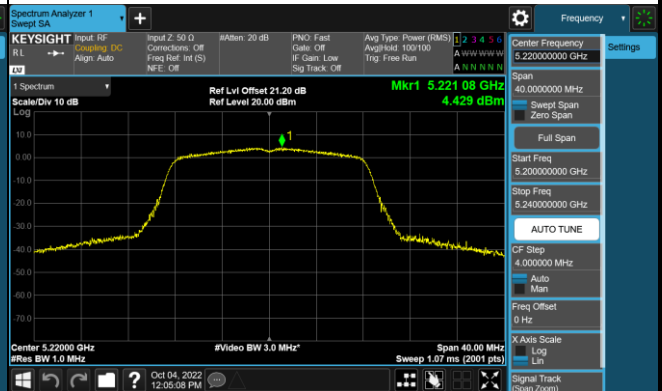


Channel 48 (5240MHz)

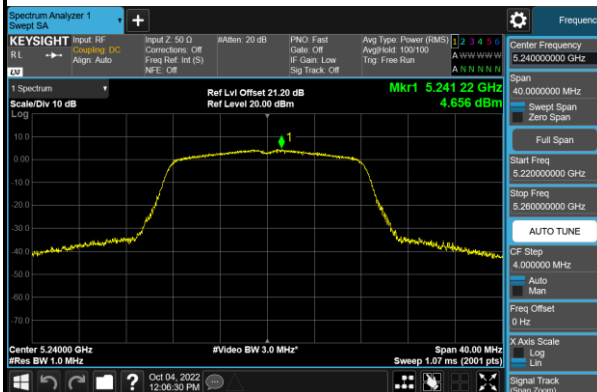


Channel 52 (5260MHz)

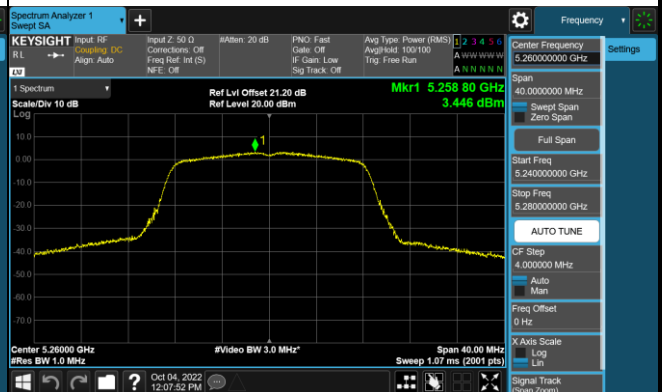


Channel 60 (5300MHz)

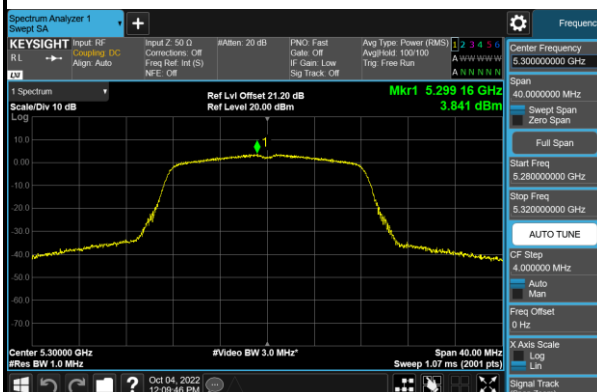

Channel 64 (5320MHz)

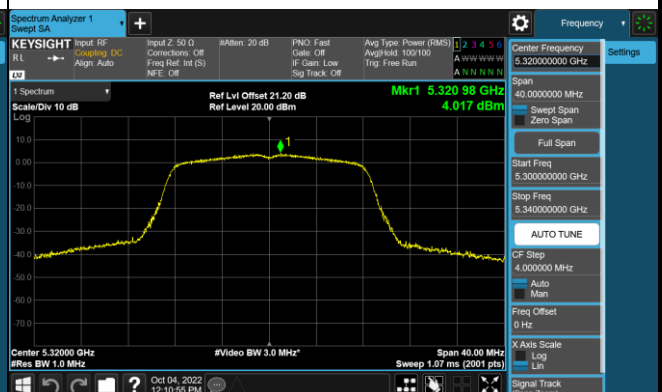


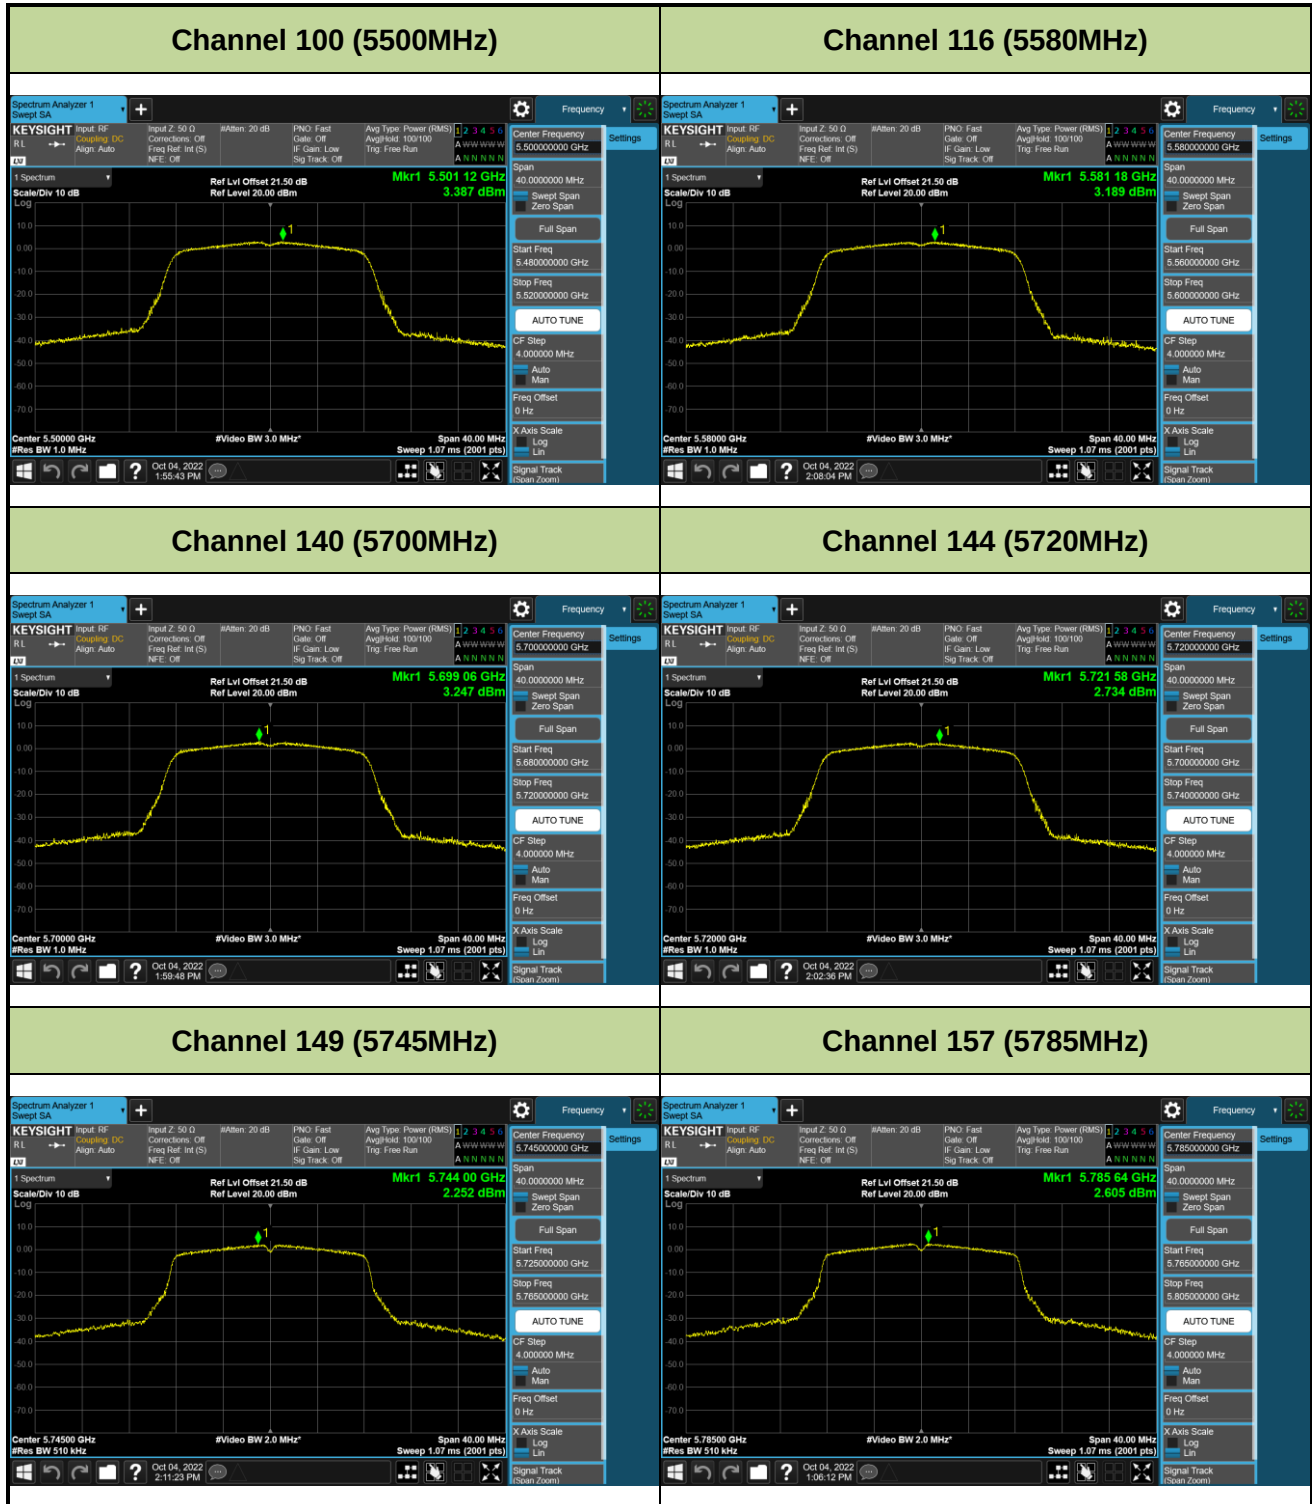




802.11n-HT20 Power Spectral Density - Ant 0


Channel 36 (5180MHz)

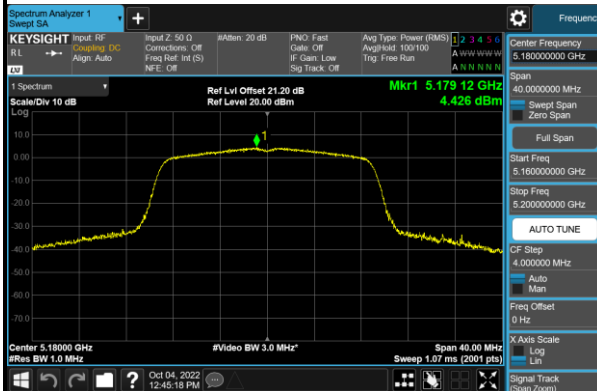


Channel 44 (5220MHz)

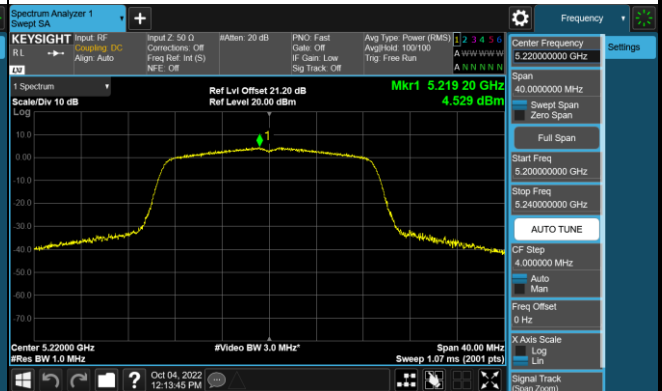


Channel 48 (5240MHz)

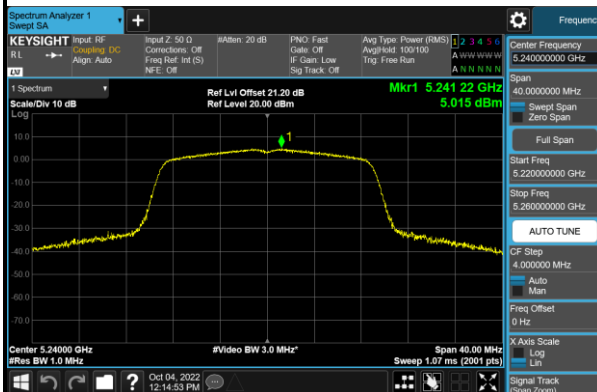


Channel 52 (5260MHz)

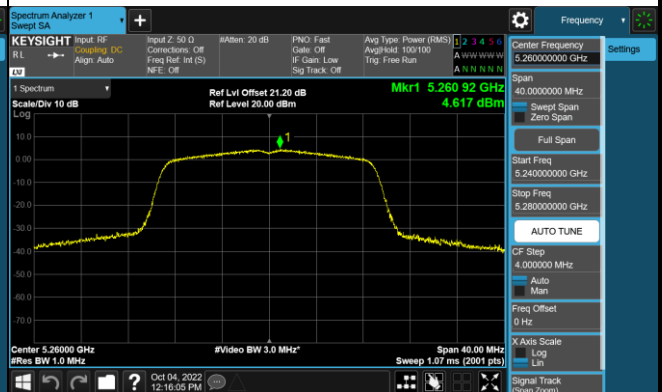




Channel 60 (5300MHz)

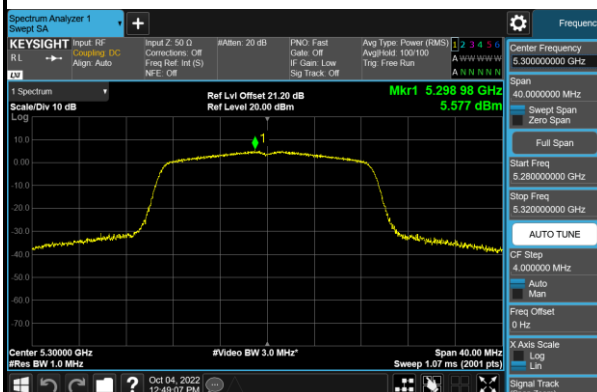

Channel 64 (5320MHz)

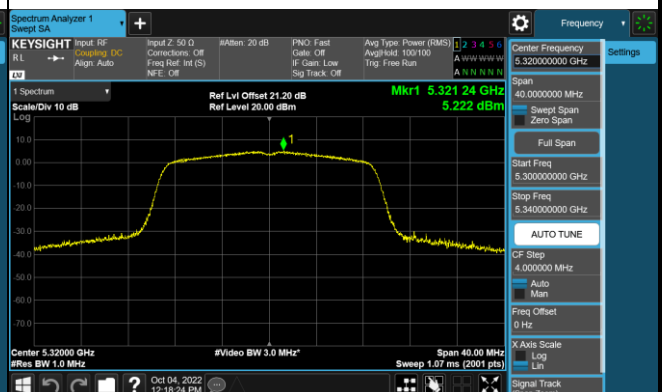


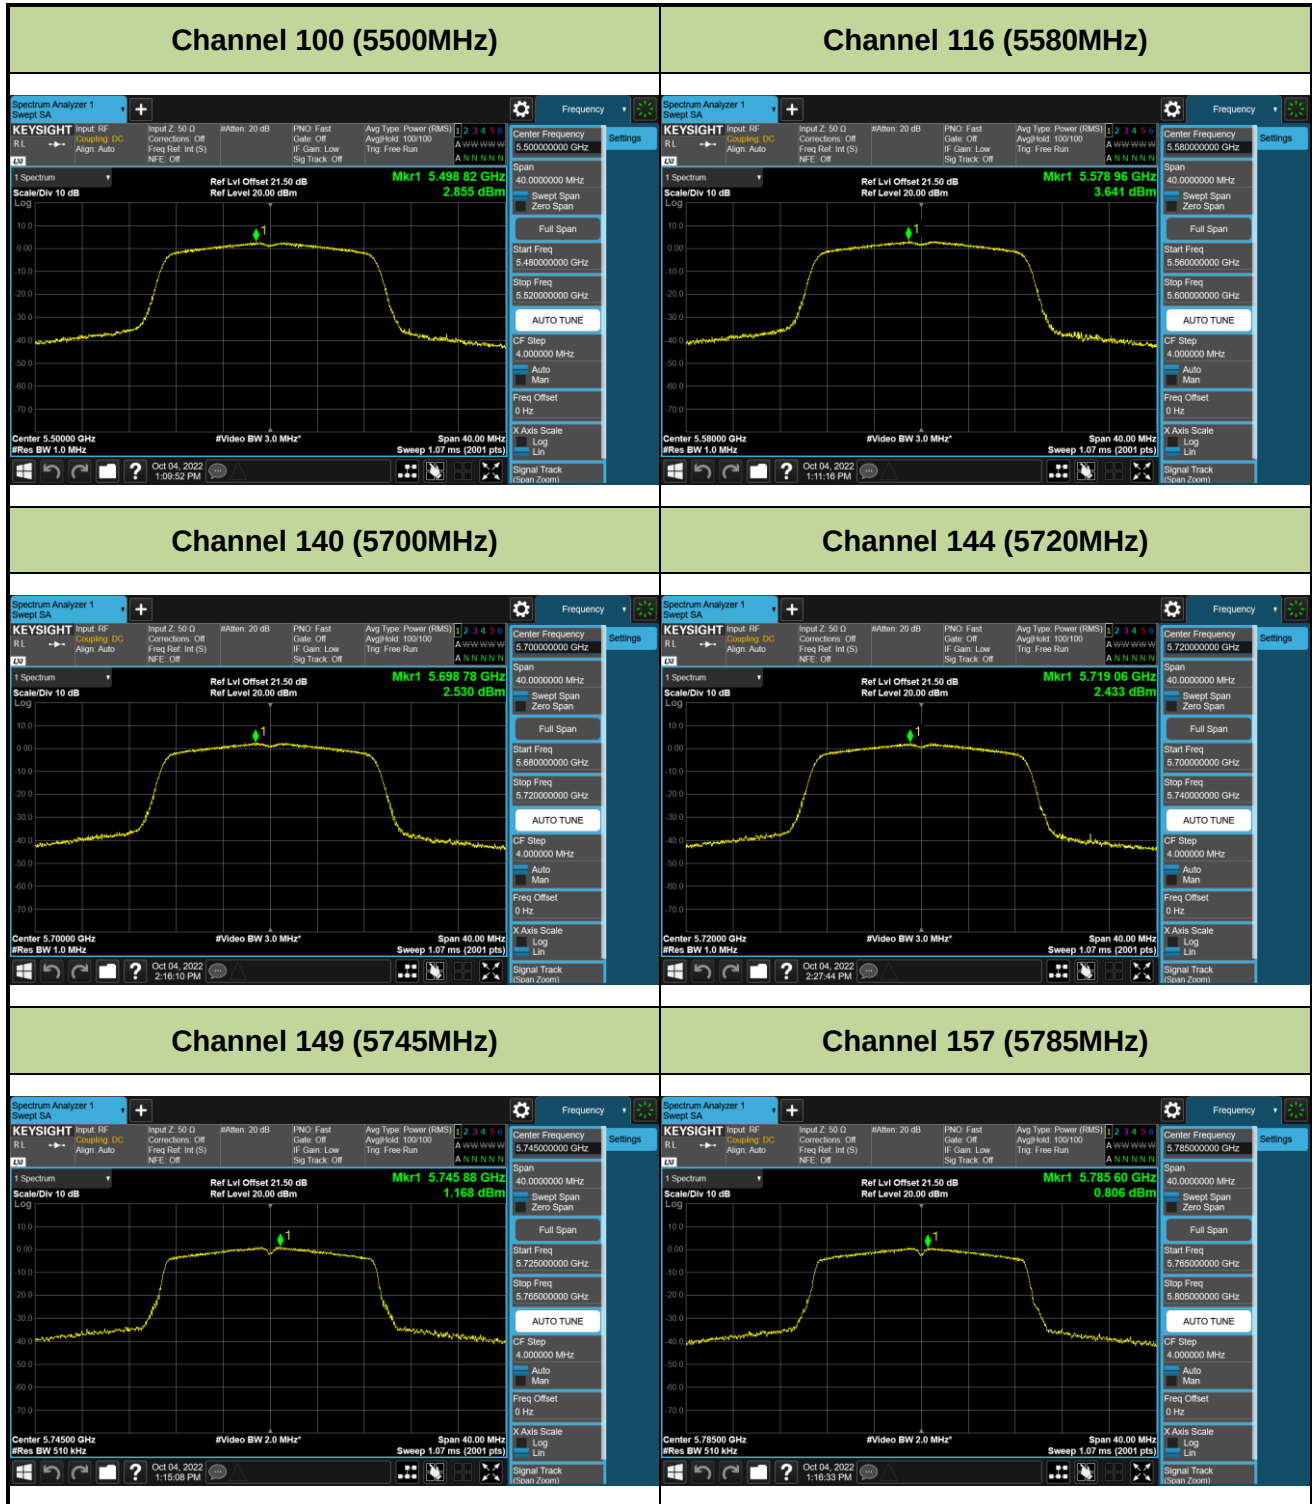




802.11n-HT40 Power Spectral Density - Ant 0


Channel 38 (5190MHz)

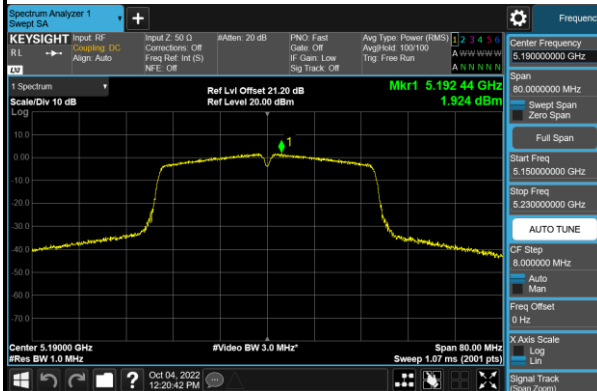


Channel 46 (5230MHz)

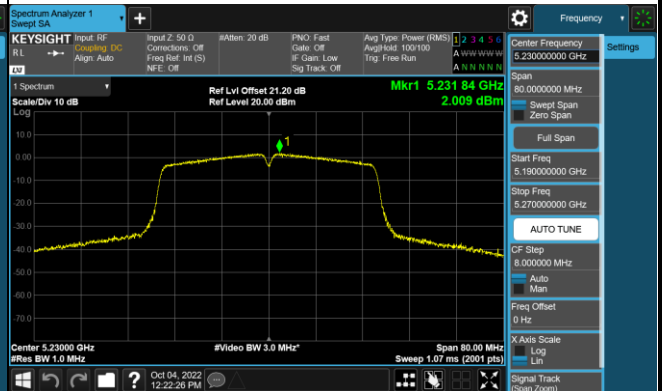


Channel 54 (5270MHz)

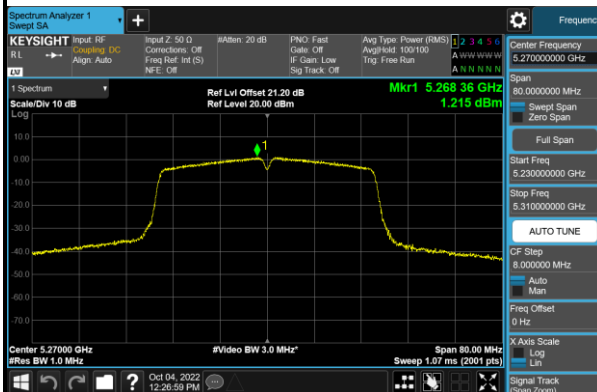


Channel 62 (5310MHz)

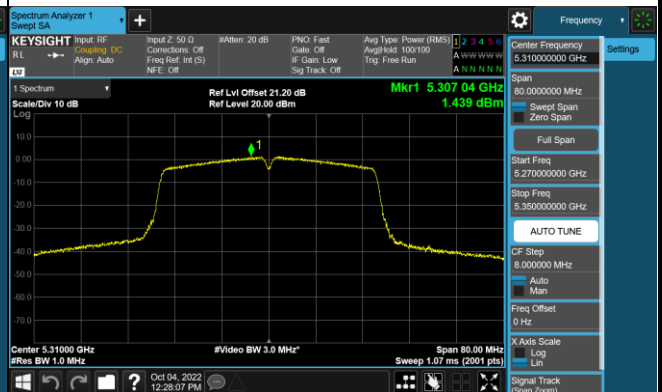


Channel 102 (5510MHz)

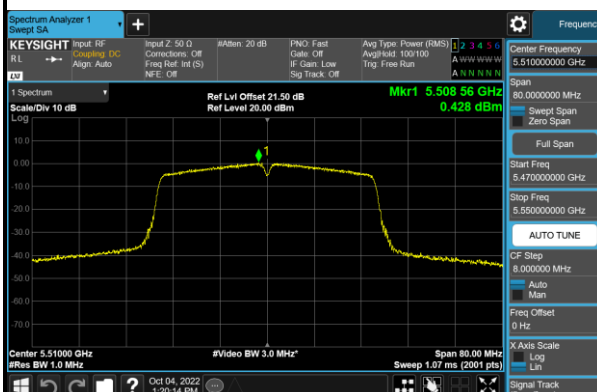


Channel 110 (5550MHz)

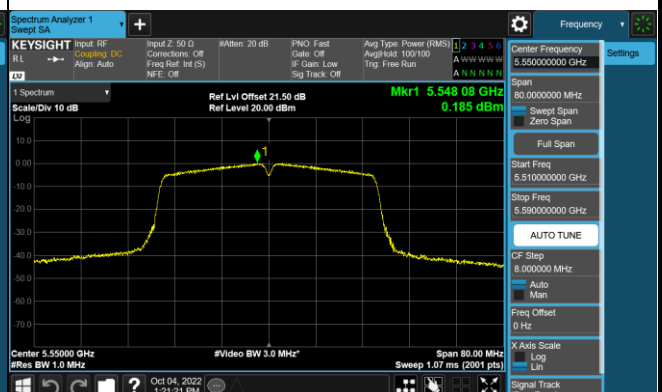

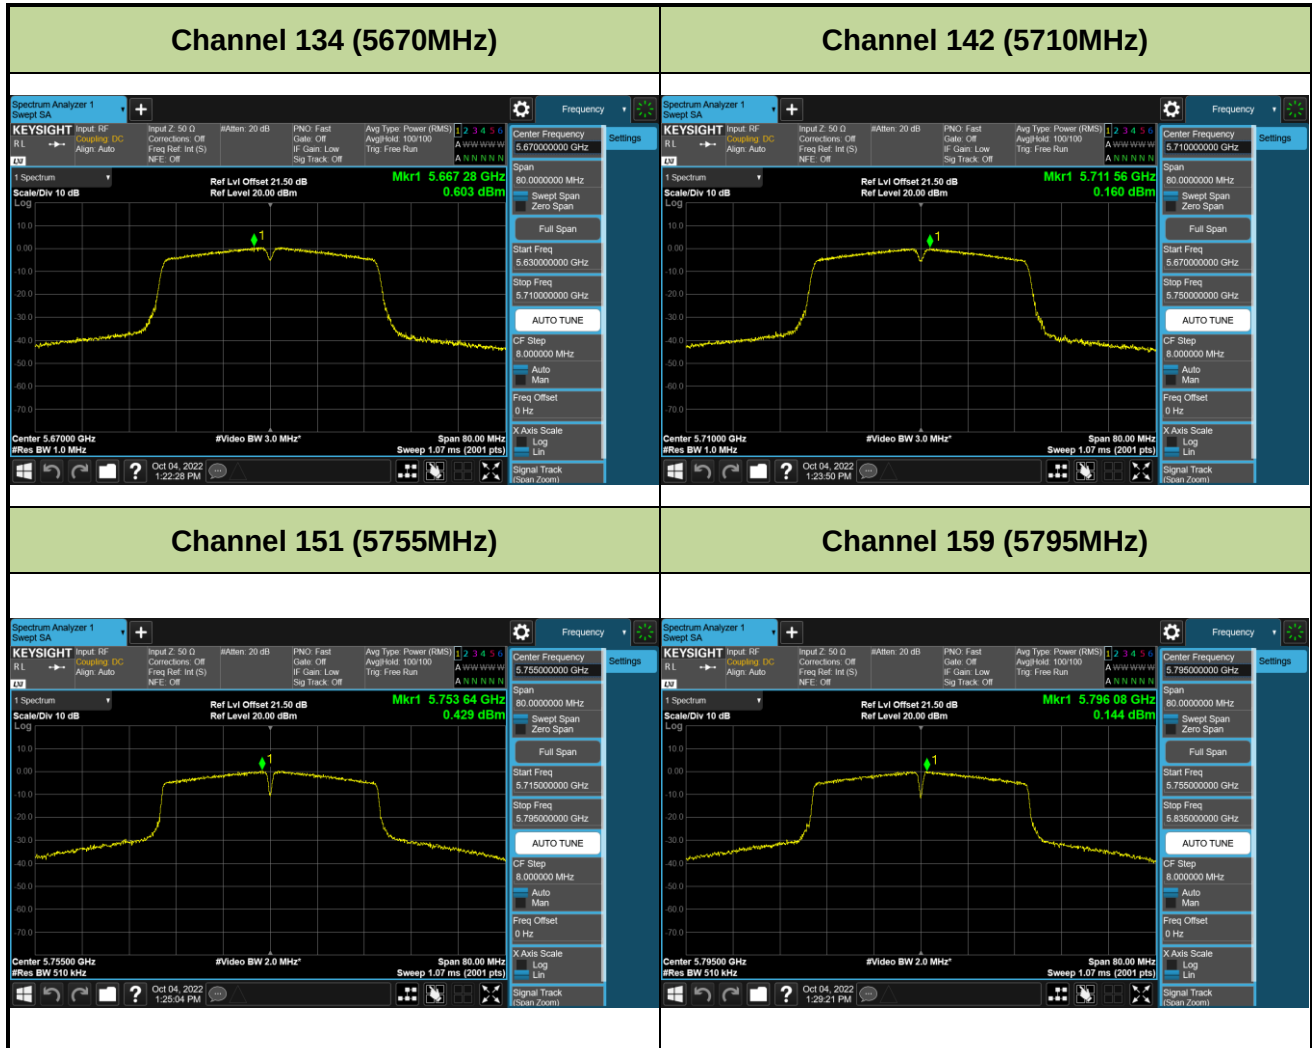


802.11ac-VHT80 Power Spectral Density - Ant 0


Channel 42 (5210MHz)

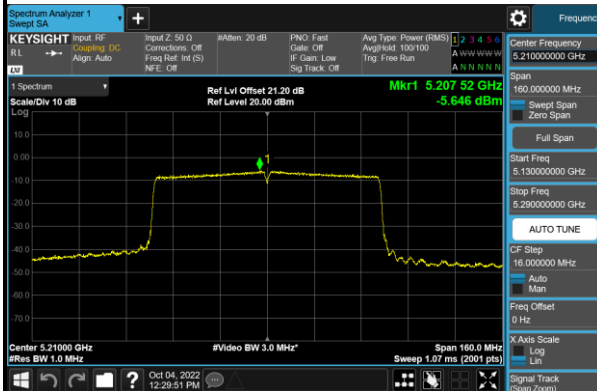


Channel 58 (5290MHz)

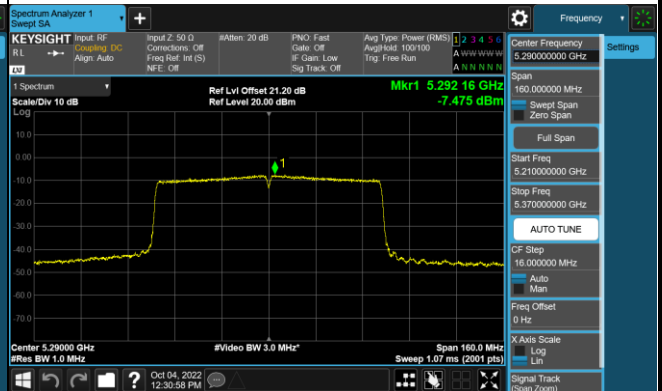


Channel 106 (5530MHz)

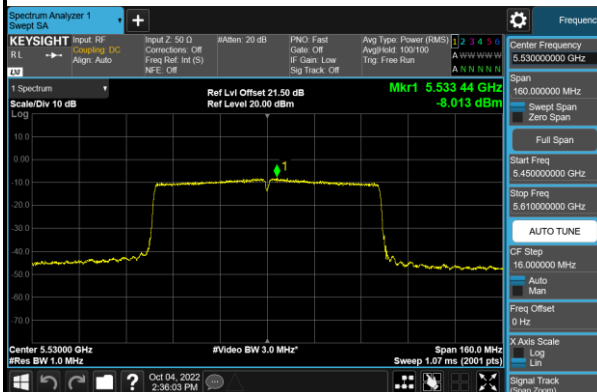


Channel 122 (5610MHz)

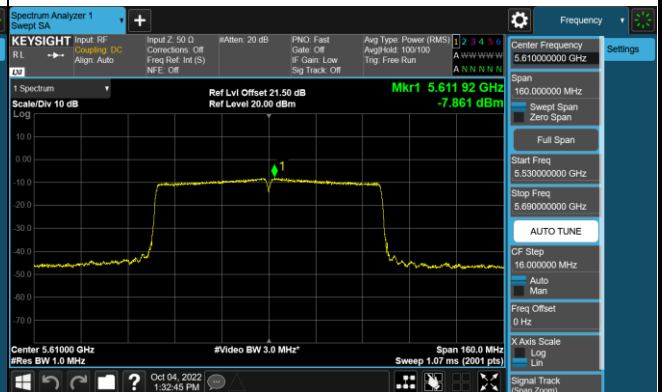

Channel 138 (5690MHz)

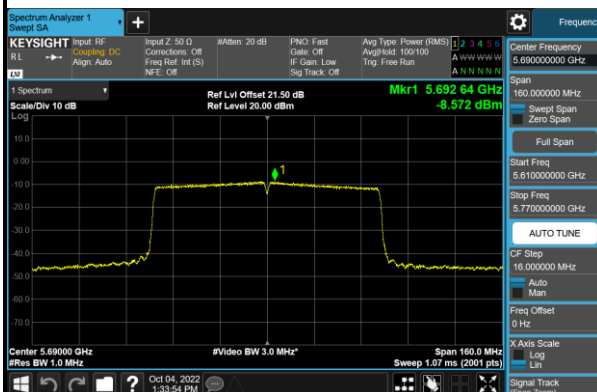


Channel 155 (5775MHz)

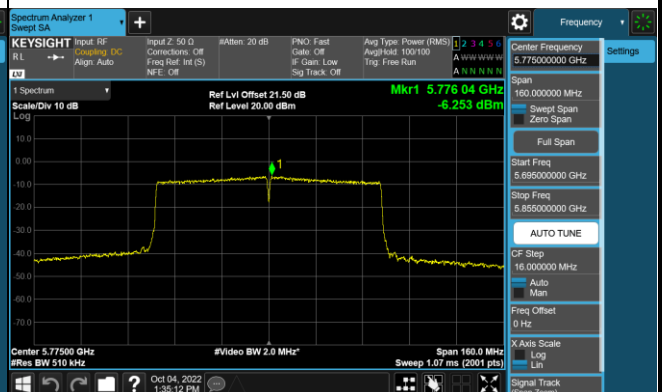


IC U-NII-1_802.11a Power Spectral Density - Ant 0


Channel 36 (5180MHz)

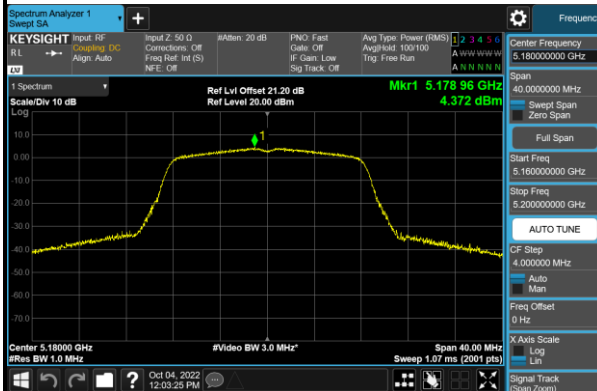

Channel 44 (5220MHz)

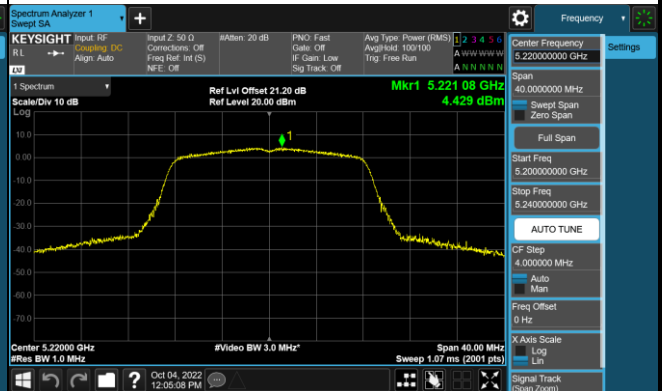


Channel 48 (5240MHz)

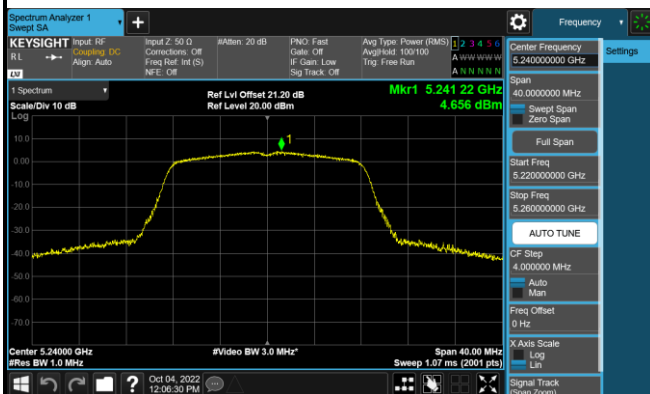


IC U-NII-1_802.11n-HT20 Power Spectral Density - Ant 0


Channel 36 (5180MHz)

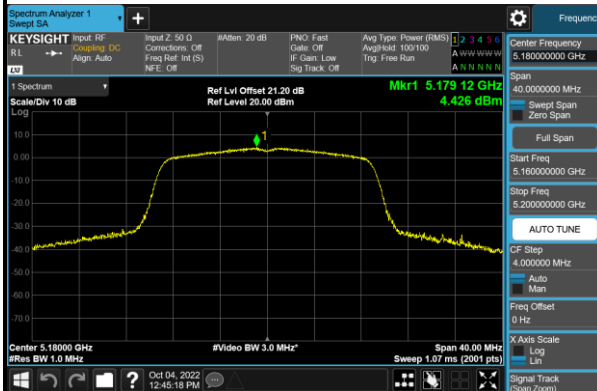

Channel 44 (5220MHz)

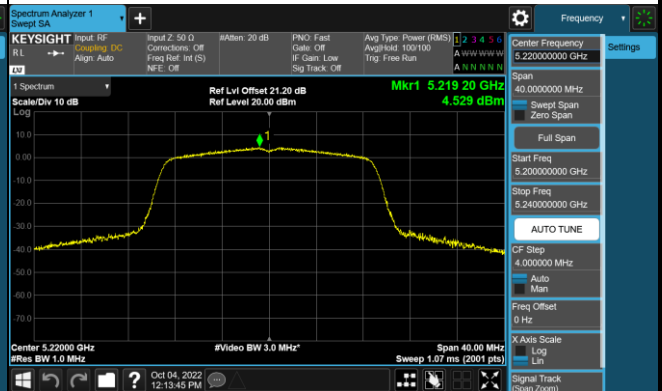


Channel 48 (5240MHz)

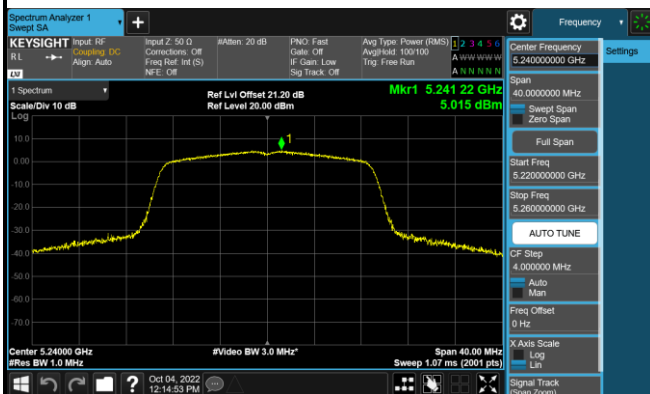


IC U-NII-1_802.11n-HT40 Power Spectral Density - Ant 0

Channel 38 (5190MHz)

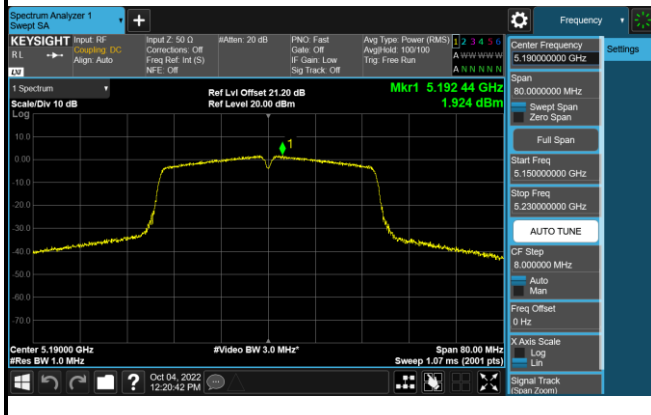


Channel 46 (5230MHz)

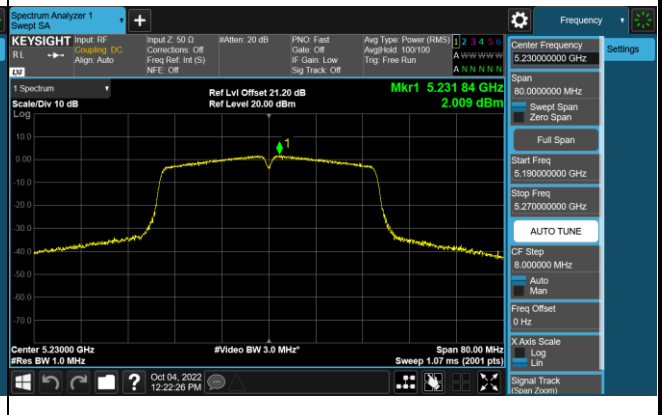

IC U-NII-1_802.11ac-VHT80 Power Spectral Density - Ant 0

Channel 42 (5210MHz)

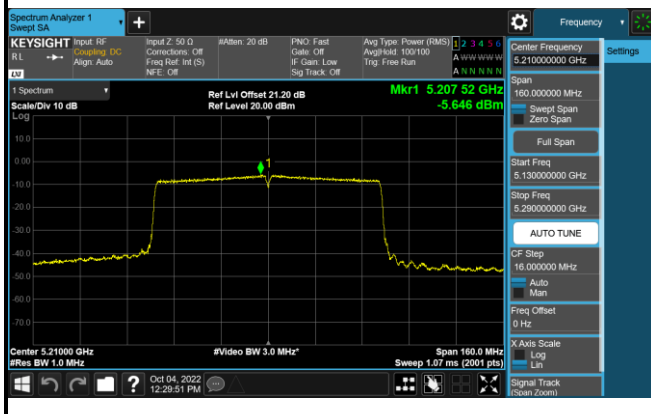

7.7. Radiated Spurious Emission Measurement

7.7.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 – 0.490	2400/F (kHz)	300
0.490 – 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

KDB 789033 D02v02r01 – Section G

7.7.3. Test Setting

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120 kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Average Measurements above 1GHz (Method AD)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (Average)
5. Number of measurement points = 1001 (Number of points must be $> 2 \times \text{span}/\text{RBW}$)
6. Sweep time = auto
7. Trace was averaged over at 100 sweeps

Quasi-Peak & Average Measurements below 30MHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 200Hz for 9kHz to 150kHz frequency; RBW = 9kHz for 0.15MHz to 30MHz frequency
4. Detector = CISPR quasi-peak or power average (Average)
5. Sweep time = auto couple
6. Trace was allowed to stabilize

7.7.4. Test Setup


9kHz ~ 30MHz Test Setup:

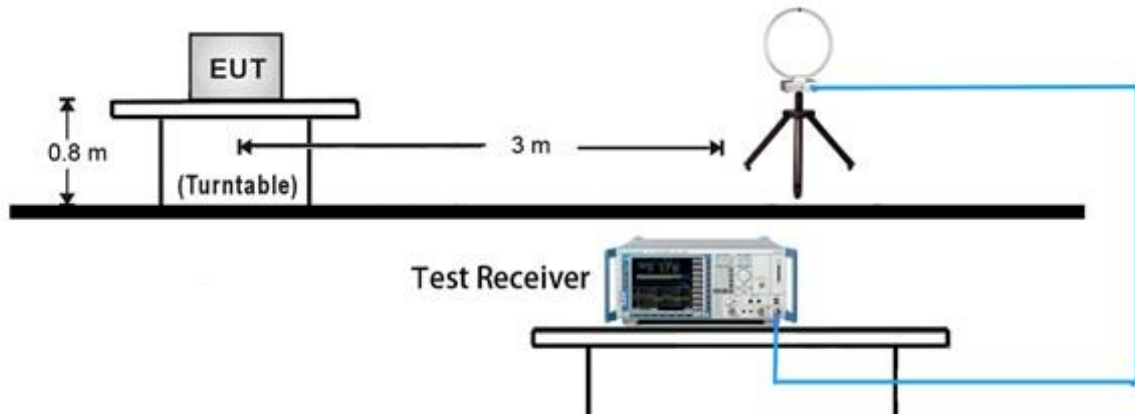


30MHz ~ 1GHz Test Setup:

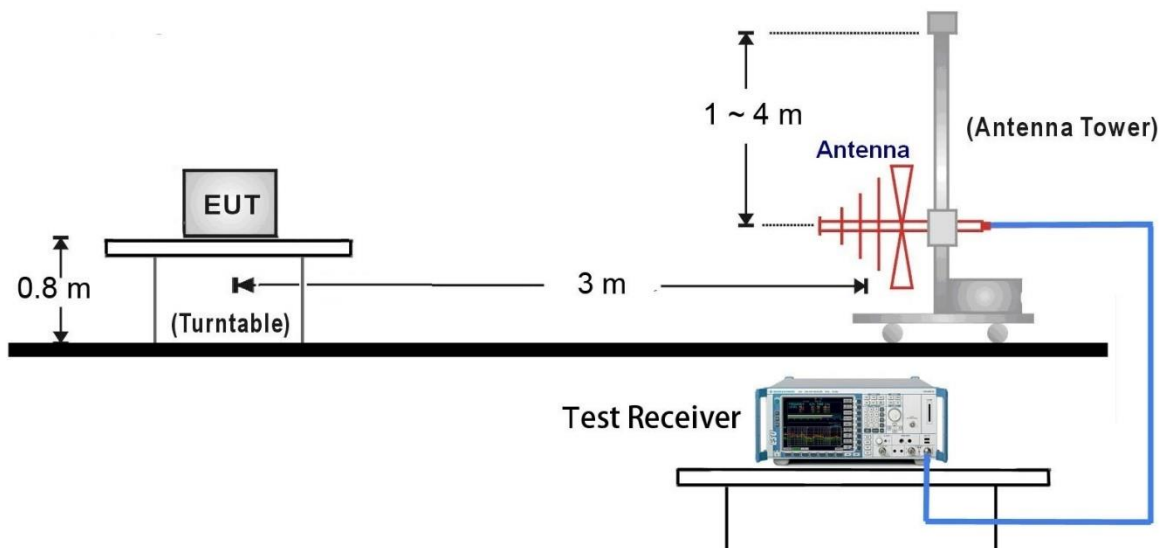

1GHz ~18GHz Test Setup:

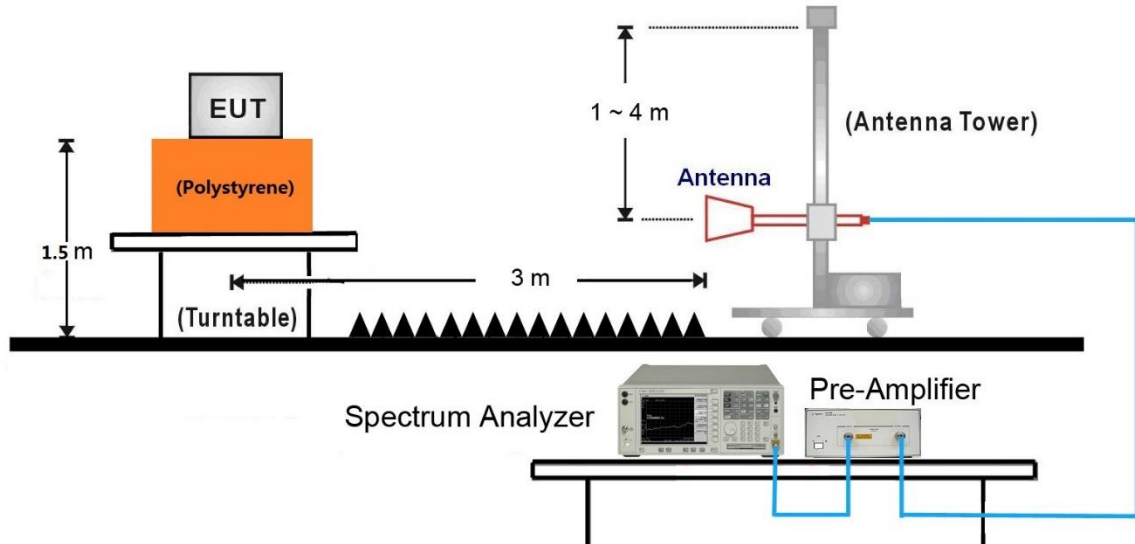


18GHz ~40GHz Test Setup:

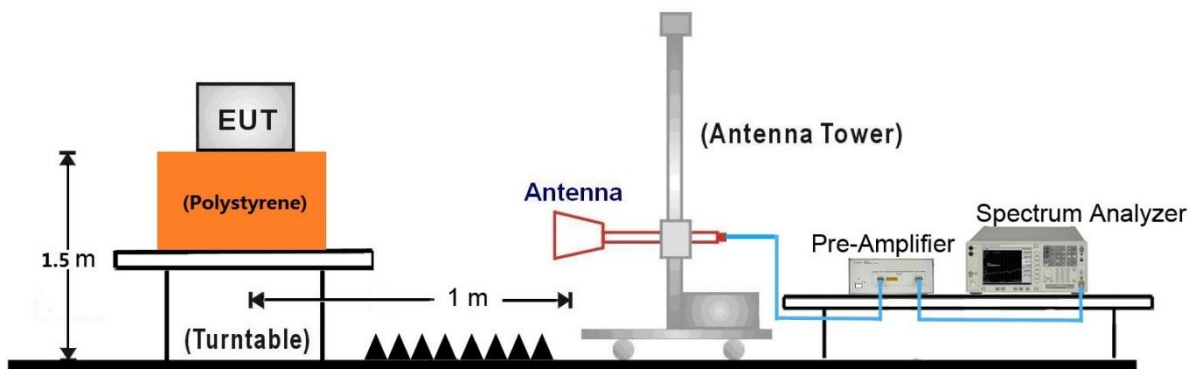

7.7.5. Test Result

EUT	Rugged Tablet	Date of Test	2022-10-06
Factor	VULB 9162	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0	Test Voltage	AC 120V/60Hz

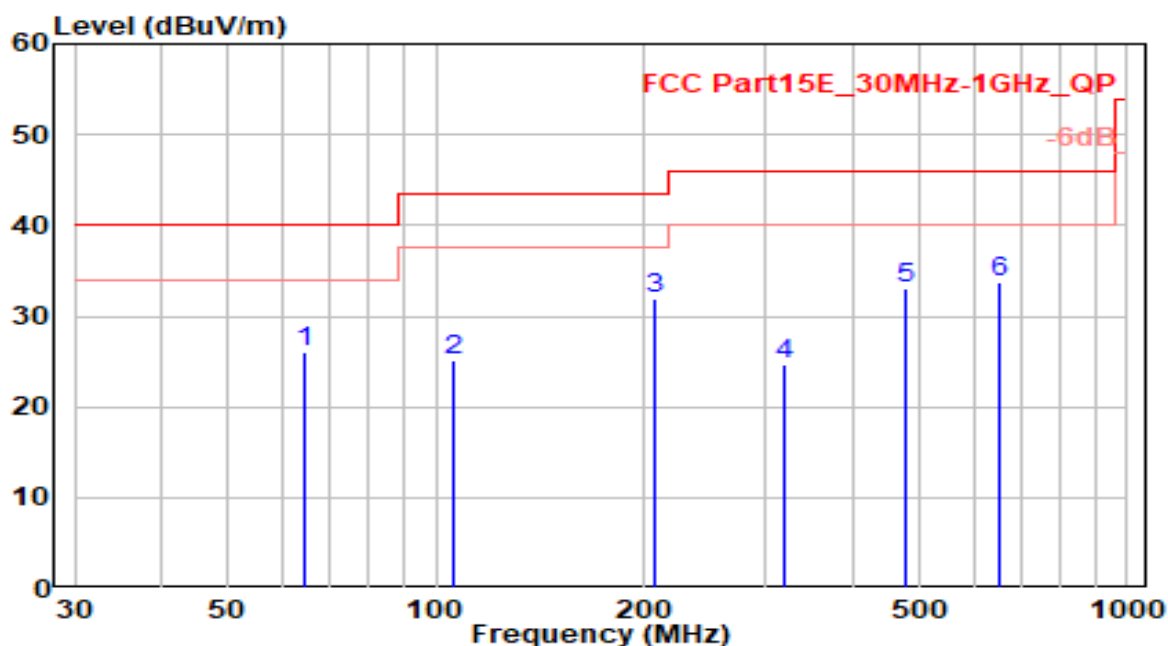


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	64.310	7.55	18.43	25.97	-14.03	40.00	200	35	QP
2	105.620	6.13	19.06	25.19	-18.31	43.50	150	90	QP
3	* 207.090	13.35	18.66	32.00	-11.50	43.50	100	280	QP
4	318.080	2.69	21.93	24.62	-21.38	46.00	100	85	QP
5	478.320	7.98	25.16	33.14	-12.86	46.00	160	15	QP
6	655.950	5.49	28.25	33.74	-12.26	46.00	100	45	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-06
Factor	VULB 9162	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0	Test Voltage	AC 120V/60Hz

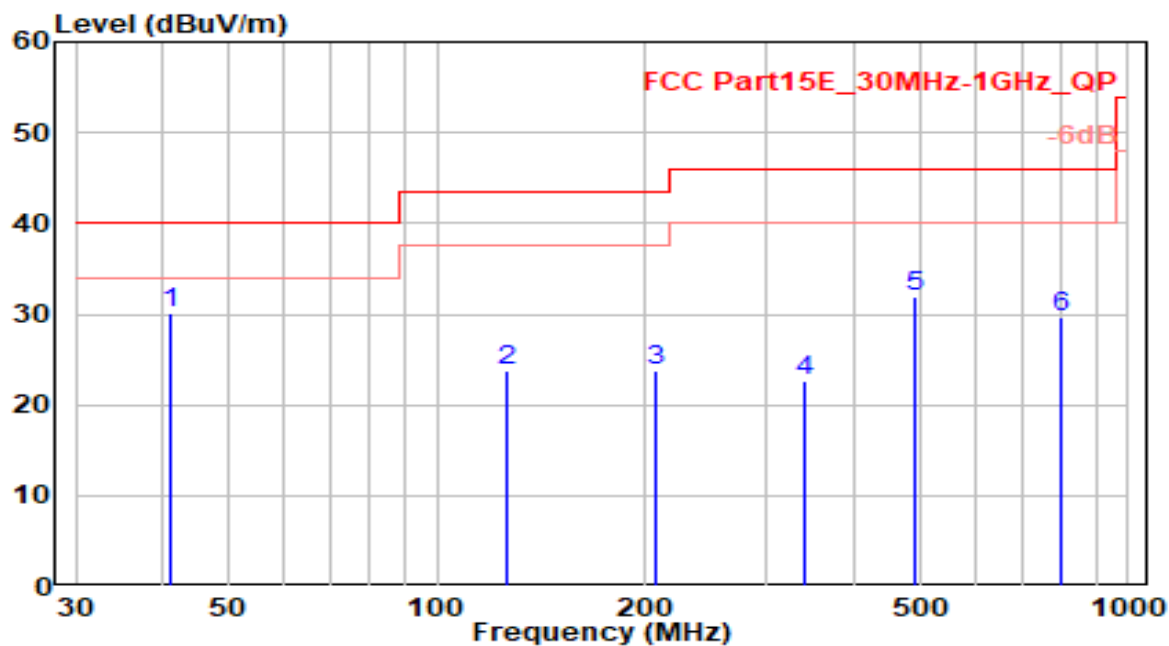


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	41.030	9.39	20.66	30.05	-9.95	40.00	100	205	QP
2		125.990	7.01	16.76	23.77	-19.73	43.50	100	80	QP
3		208.060	5.17	18.65	23.82	-19.68	43.50	100	80	QP
4		339.420	0.09	22.61	22.71	-23.29	46.00	100	125	QP
5		492.870	6.45	25.54	31.99	-14.01	46.00	100	310	QP
6		800.480	-0.16	29.90	29.74	-16.26	46.00	100	185	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-06
Factor	VULB 9162	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_RX_Band1_CH 44_ANT 0	Test Voltage	AC 120V/60Hz

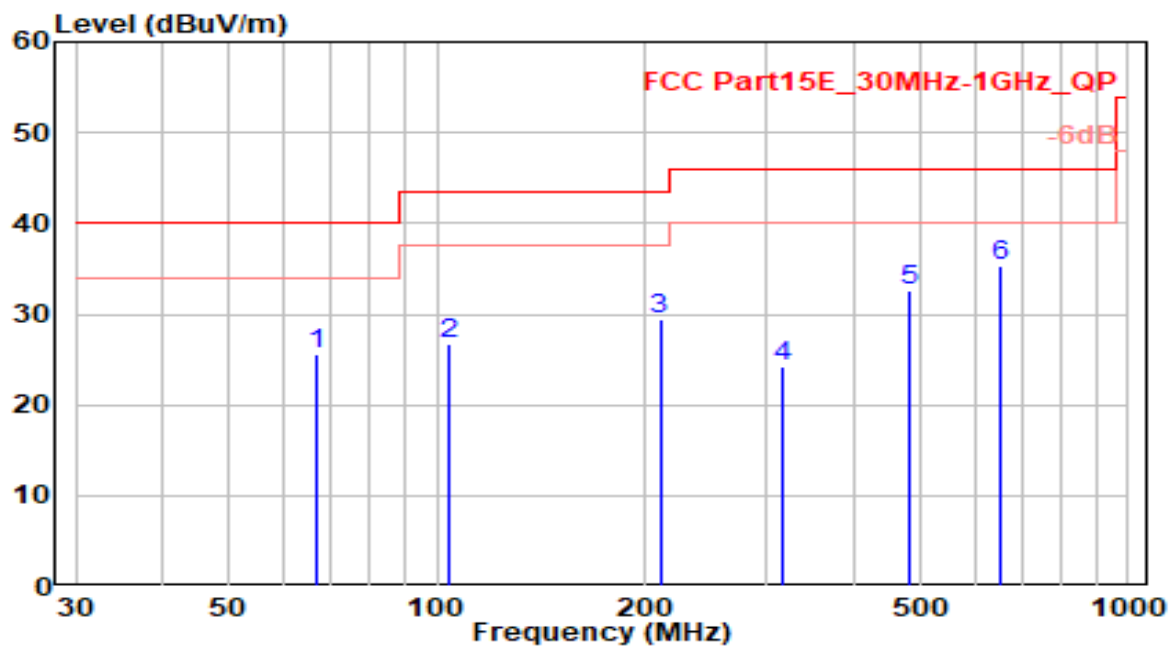


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	66.970	8.07	17.43	25.49	-14.51	40.00	100	65	QP
2	103.600	7.56	19.15	26.71	-16.79	43.50	100	120	QP
3	210.130	10.88	18.64	29.52	-13.98	43.50	100	310	QP
4	316.120	2.27	21.87	24.14	-21.86	46.00	100	115	QP
5	480.620	7.44	25.22	32.66	-13.34	46.00	100	45	QP
6	* 654.610	7.03	28.23	35.26	-10.74	46.00	100	75	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-06
Factor	VULB 9162	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_RX_Band1_CH 44_ANT 0	Test Voltage	AC 120V/60Hz

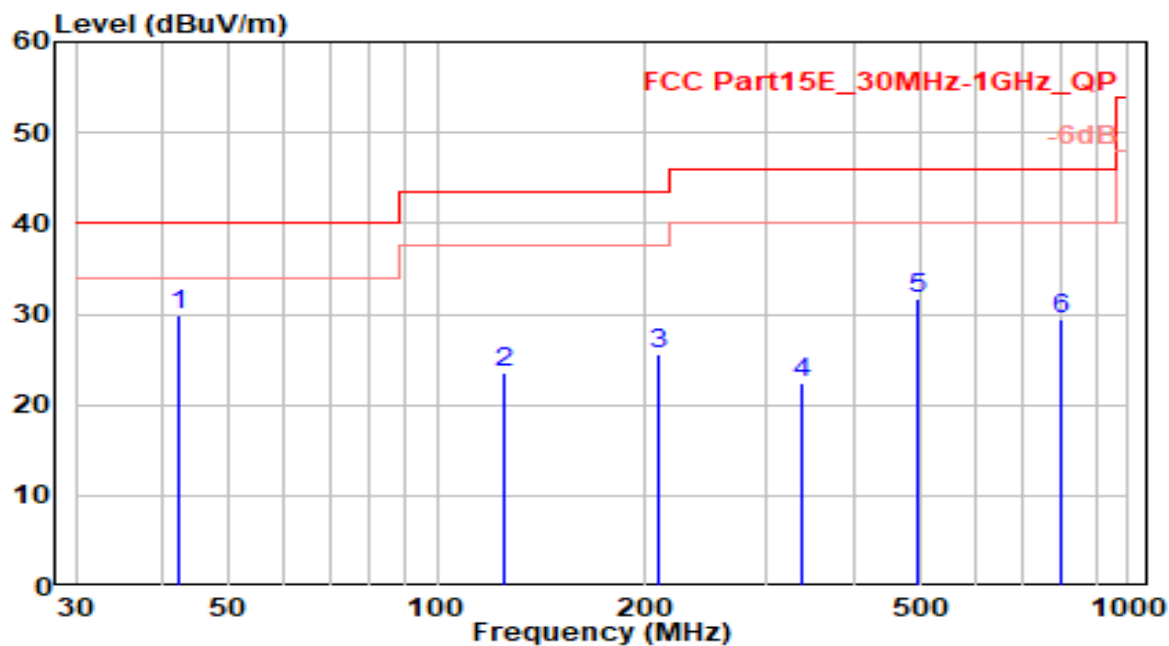


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	42.360	8.88	20.93	29.81	-10.19	40.00	100	220	QP
2		124.980	6.63	16.90	23.53	-19.97	43.50	100	95	QP
3		209.580	6.94	18.64	25.58	-17.92	43.50	100	95	QP
4		338.440	-0.12	22.58	22.47	-23.53	46.00	100	140	QP
5		494.020	6.18	25.57	31.75	-14.25	46.00	100	325	QP
6		799.810	-0.39	29.89	29.50	-16.50	46.00	100	200	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

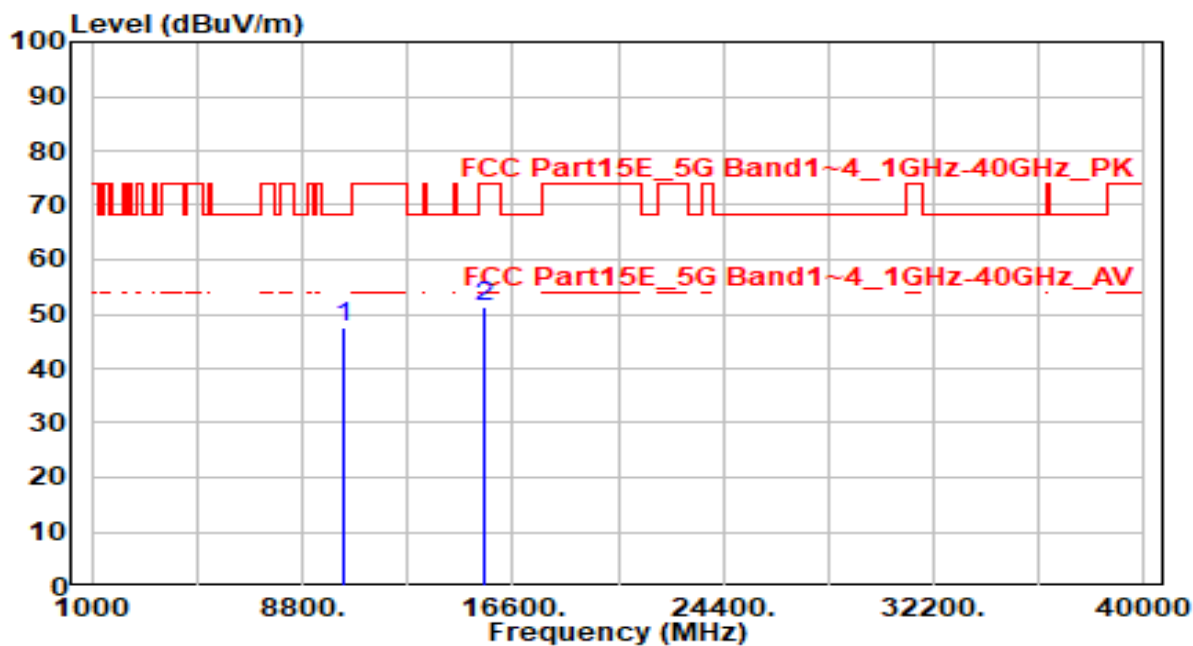


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10360.000	42.16	5.29	47.45	-20.75	68.20	150	360	Peak
2	15540.000	45.04	6.41	51.45	-22.55	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

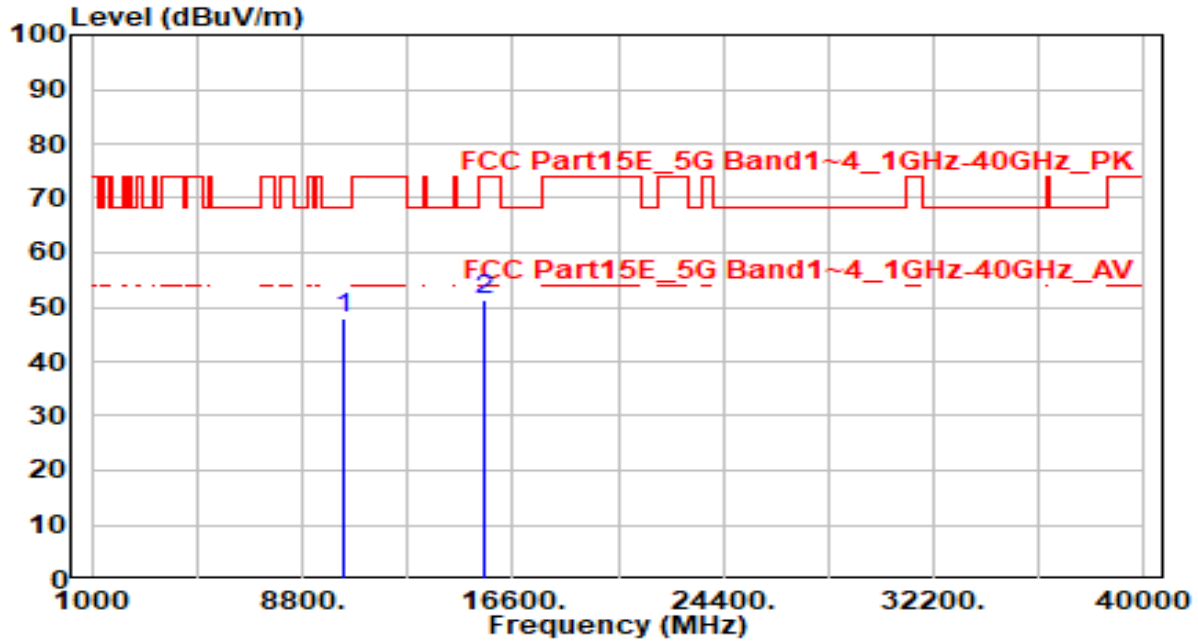


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	42.73	5.29	48.02	-20.18	68.20	150	360	Peak
2		15540.000	44.80	6.41	51.20	-22.80	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band1_CH 44_ANT 0	Test Voltage	AC 120V/60Hz

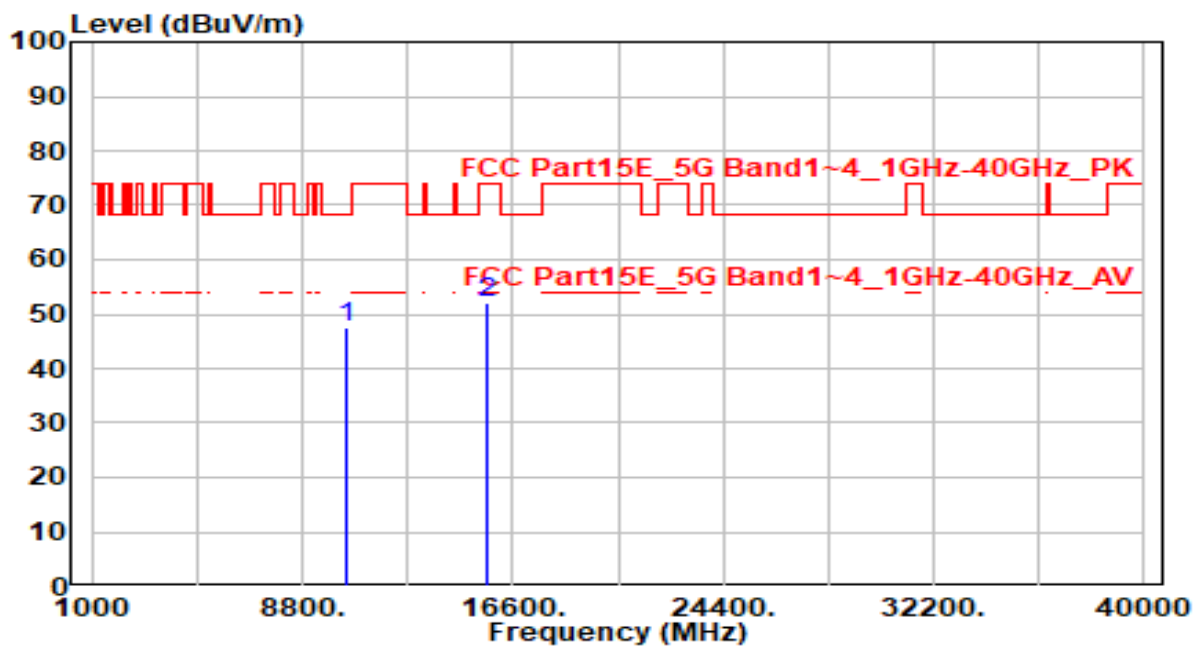


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10440.000	42.22	5.28	47.50	-20.70	68.20	150	360	Peak
2	15660.000	45.40	6.56	51.96	-22.04	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band1_CH 44_ANT 0	Test Voltage	AC 120V/60Hz

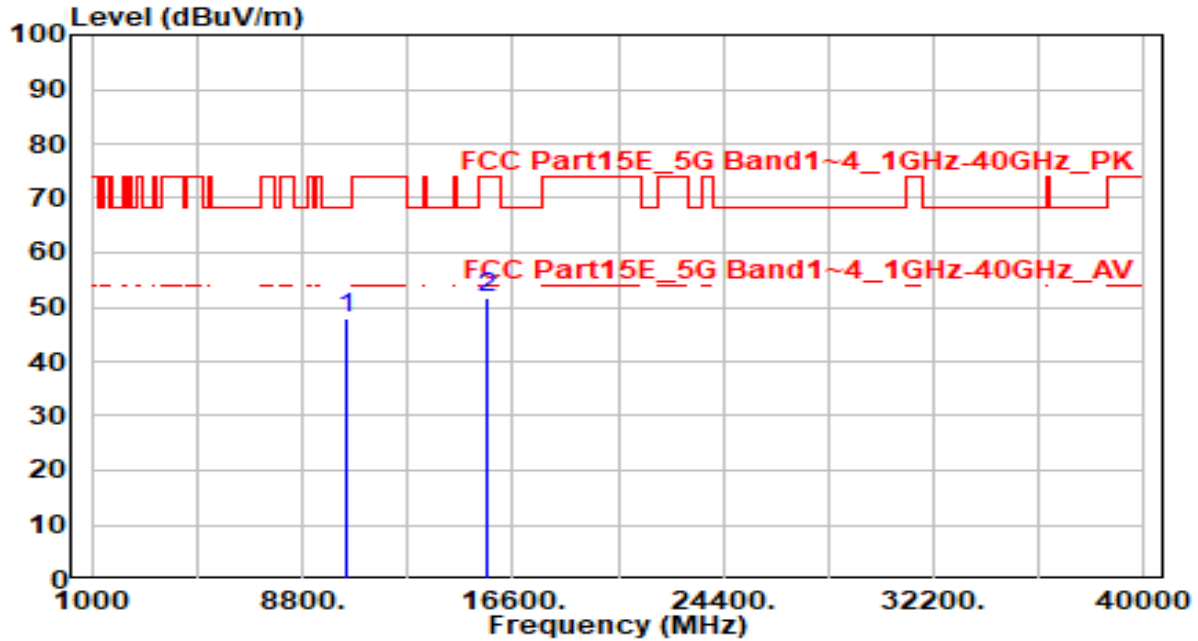


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10440.000	42.63	5.28	47.91	-20.29	68.20	150	360	Peak
2	15660.000	45.12	6.56	51.68	-22.32	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band1_CH 48_ANT 0	Test Voltage	AC 120V/60Hz

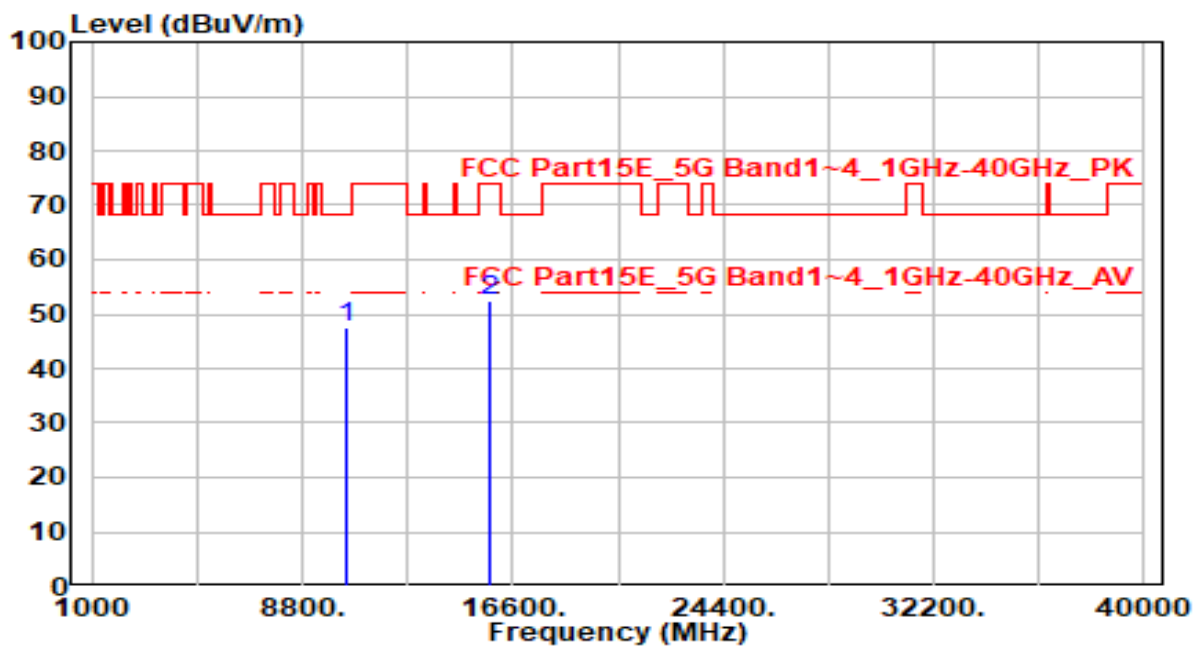


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10480.000	42.28	5.26	47.54	-20.66	68.20	150	360	Peak
2	15720.000	45.69	6.69	52.38	-21.62	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band1_CH 48_ANT 0	Test Voltage	AC 120V/60Hz

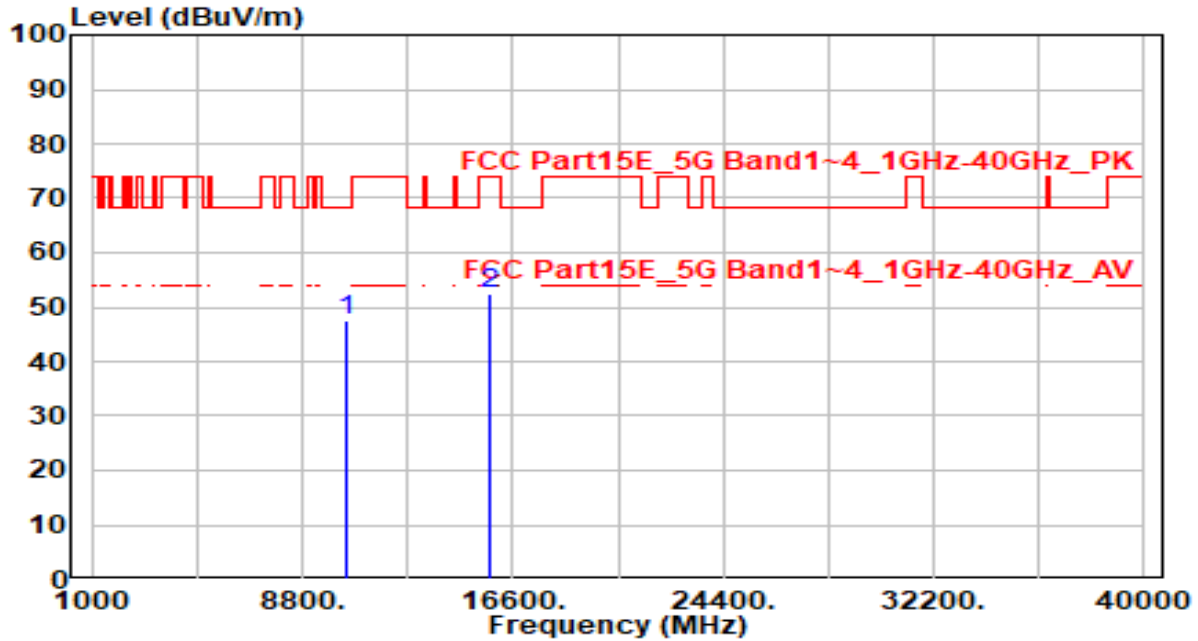


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10480.000	42.31	5.26	47.57	-20.63	68.20	150	360	Peak
2	15720.000	45.79	6.69	52.48	-21.52	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band2_CH 52_ANT 0	Test Voltage	AC 120V/60Hz

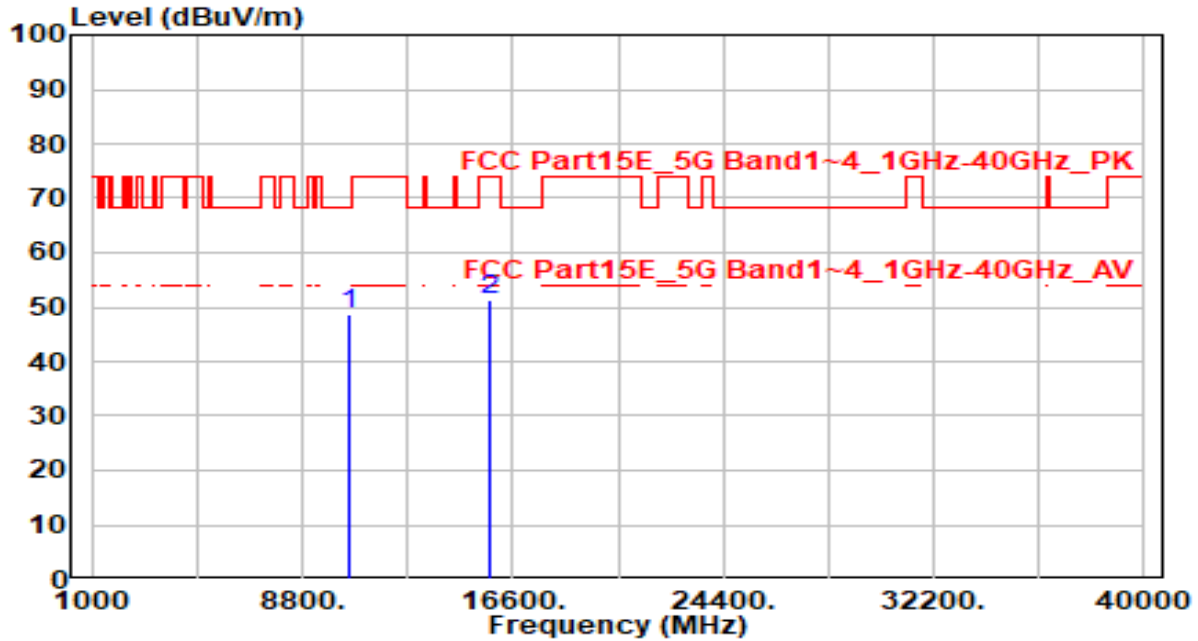


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10520.000	43.45	5.25	48.70	-19.50	68.20	150	360	Peak
2	15780.000	44.50	6.83	51.33	-22.67	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band2_CH 52_ANT 0	Test Voltage	AC 120V/60Hz

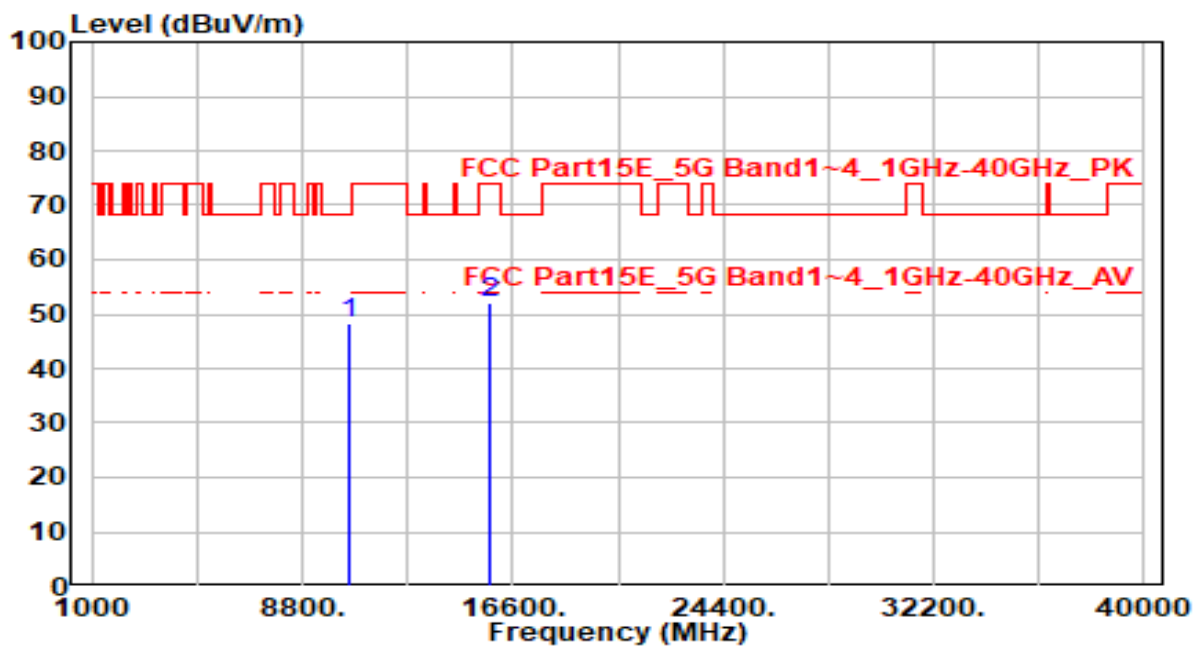


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10520.000	43.09	5.25	48.34	-19.86	68.20	150	360	Peak
2	15780.000	45.22	6.83	52.05	-21.95	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band2_CH 60_ANT 0	Test Voltage	AC 120V/60Hz

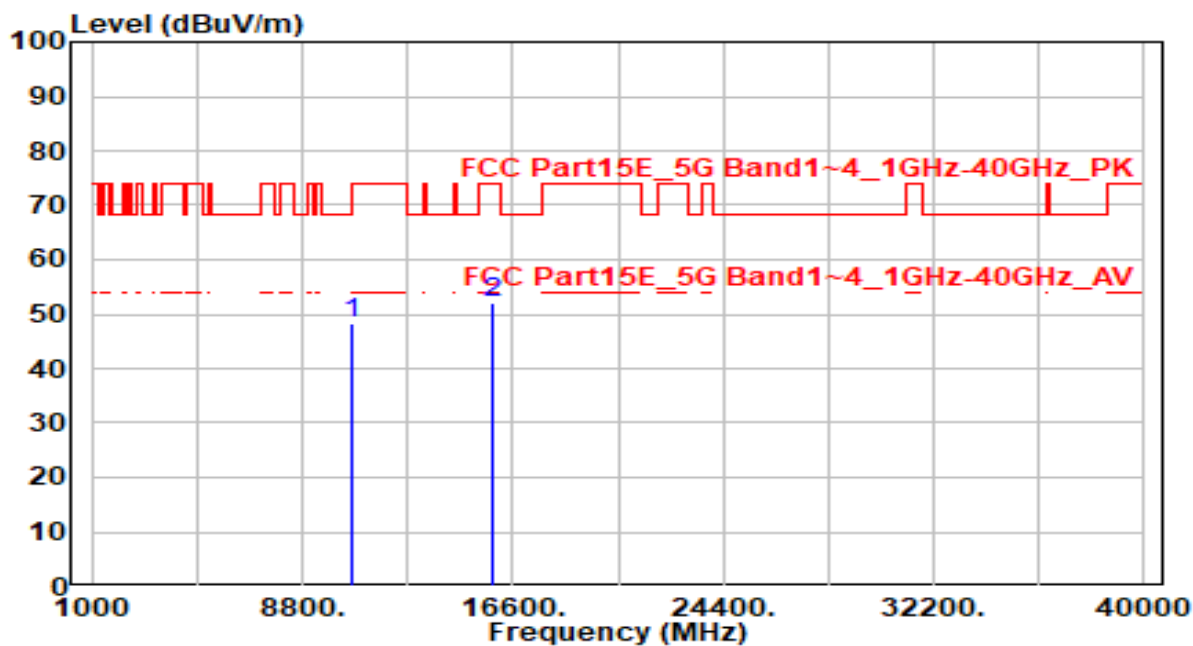


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	43.14	5.25	48.39	-19.81	68.20	150	360	Peak
2		15900.000	44.98	6.95	51.94	-22.06	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band2_CH 60_ANT 0	Test Voltage	AC 120V/60Hz

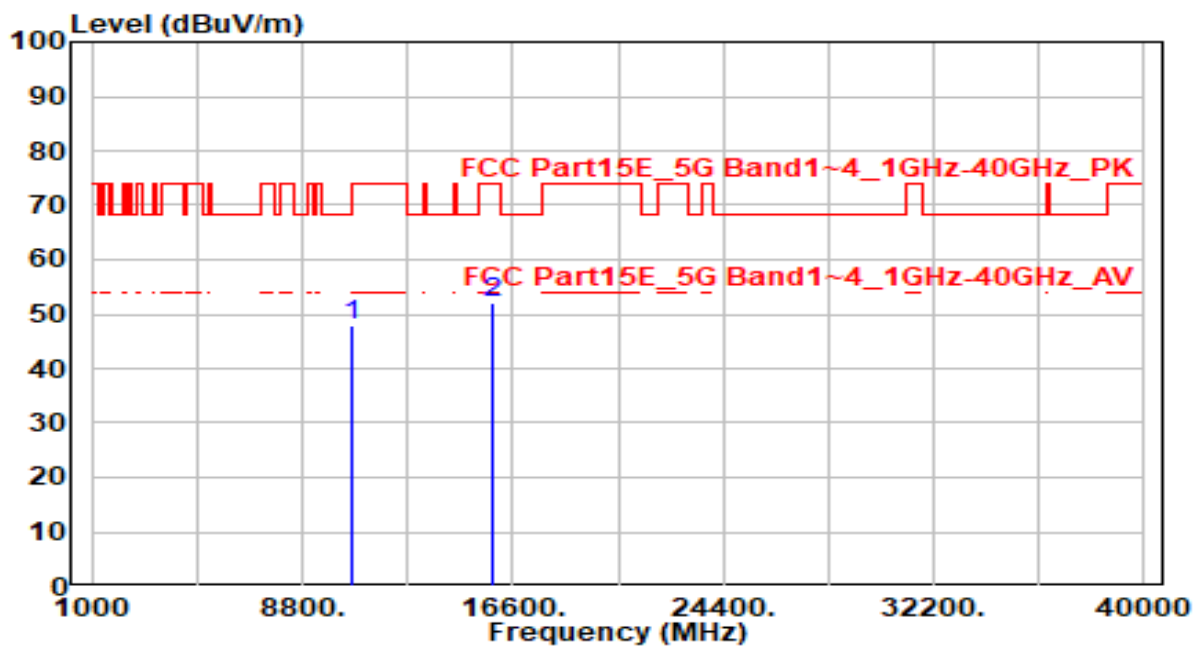


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	42.67	5.25	47.92	-20.28	68.20	150	360	Peak
2		15900.000	45.02	6.95	51.97	-22.03	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band2_CH 64_ANT 0	Test Voltage	AC 120V/60Hz

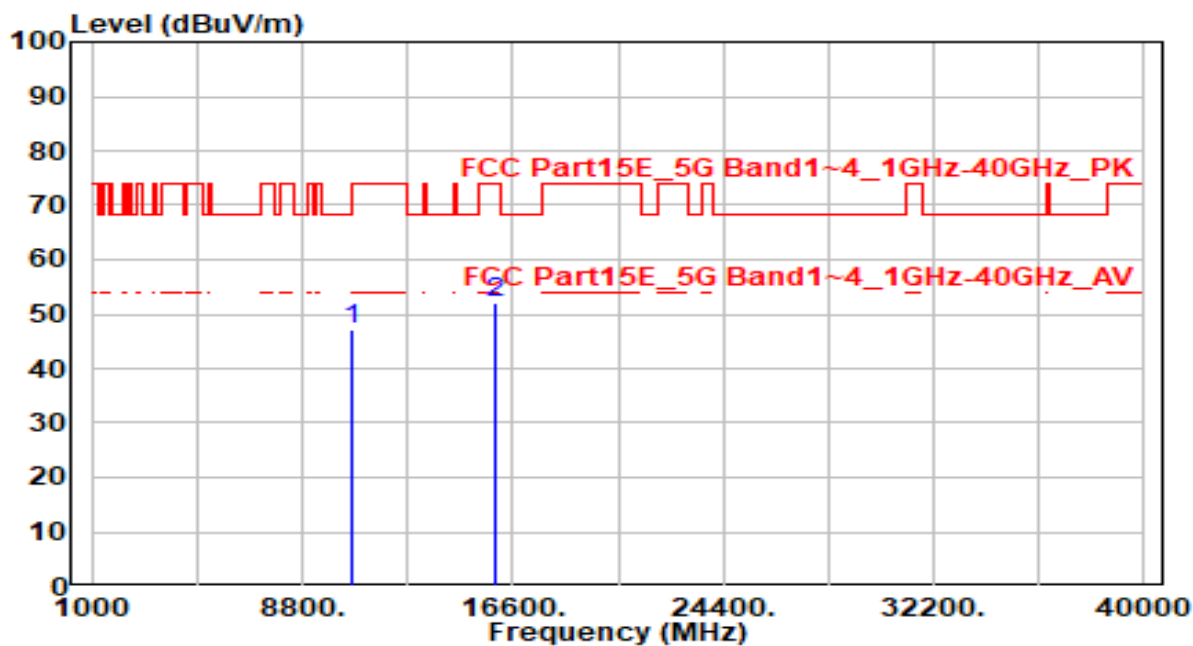


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	42.06	5.27	47.34	-26.66	74.00	150	360	Peak
2	* 15960.000	44.95	7.00	51.95	-22.05	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band2_CH 64_ANT 0	Test Voltage	AC 120V/60Hz

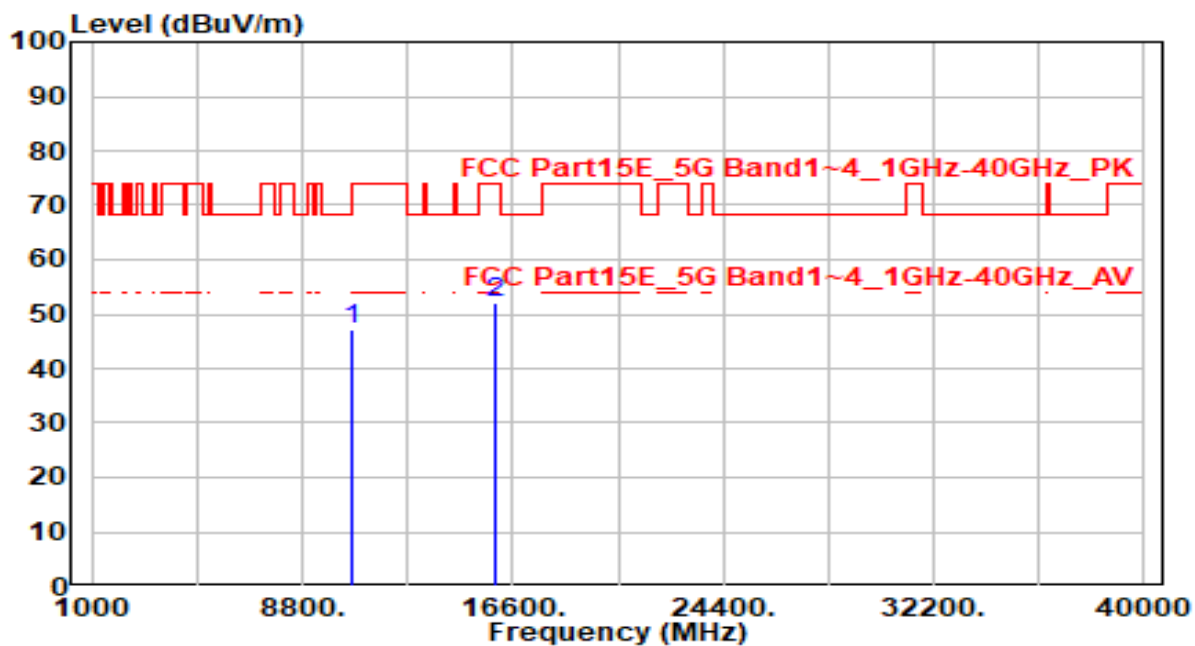


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	41.73	5.27	47.01	-26.99	74.00	150	360	Peak
2	* 15960.000	44.96	7.00	51.96	-22.04	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band3_CH 100_ANT 0	Test Voltage	AC 120V/60Hz

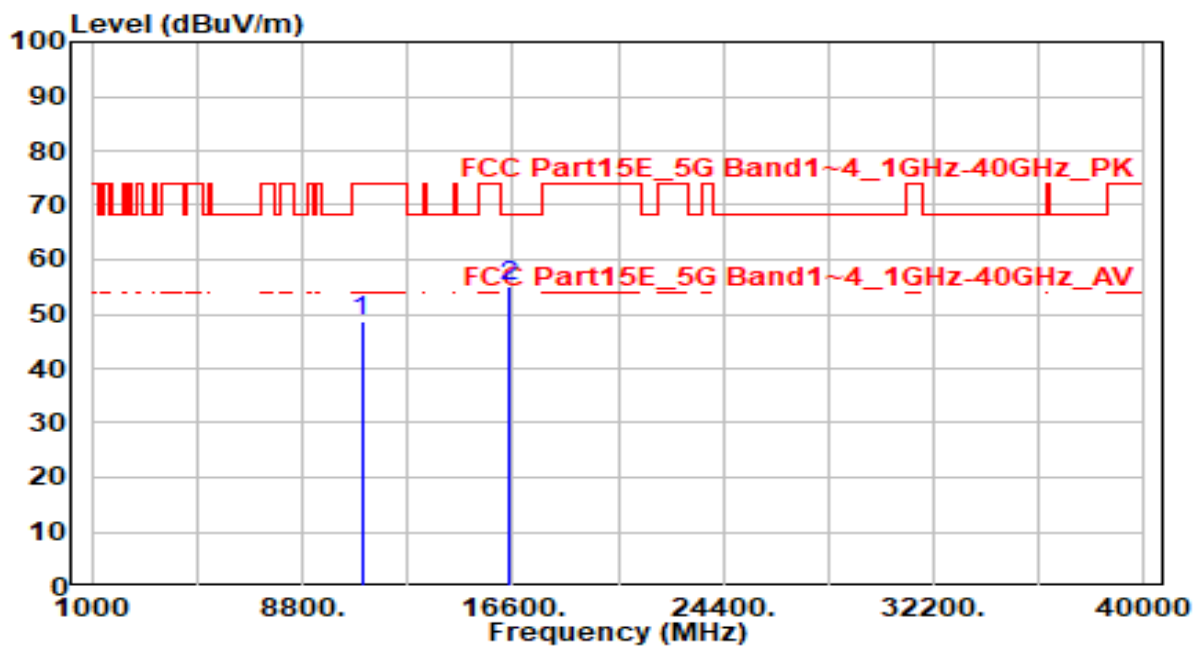


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	43.03	5.56	48.59	-25.41	74.00	150	360	Peak
2	* 16500.000	47.65	7.34	54.99	-13.21	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band3_CH 100_ANT 0	Test Voltage	AC 120V/60Hz

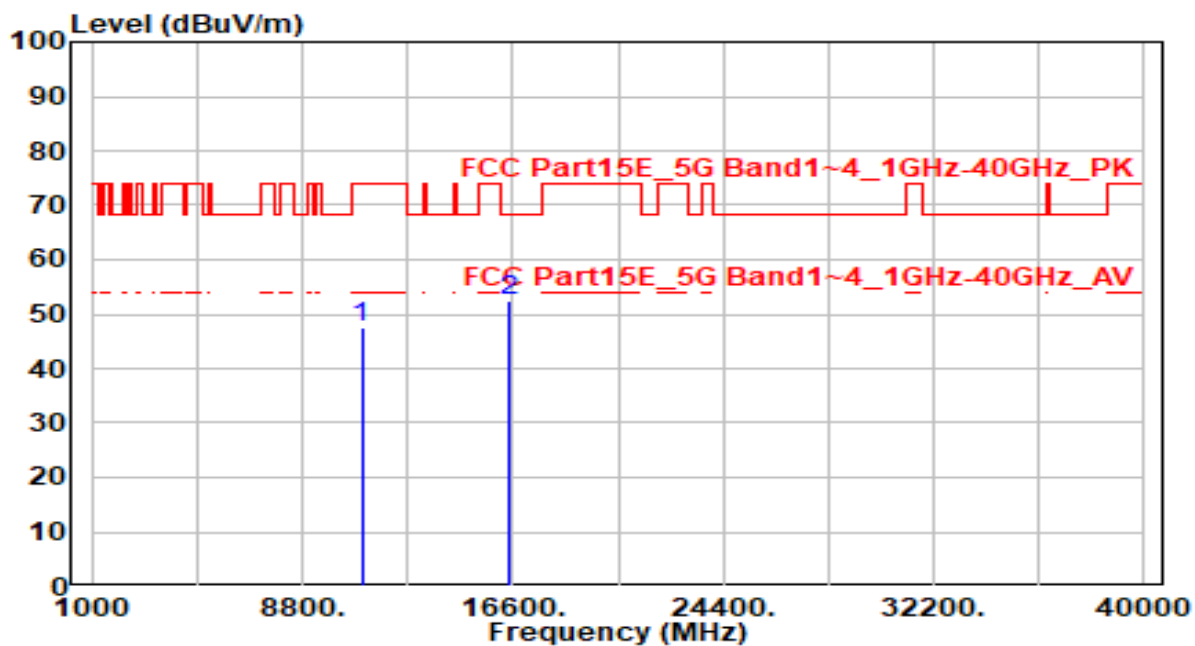


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	41.83	5.56	47.39	-26.61	74.00	150	360	Peak
2	* 16500.000	44.99	7.34	52.33	-15.87	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band3_CH 116_ANT 0	Test Voltage	AC 120V/60Hz

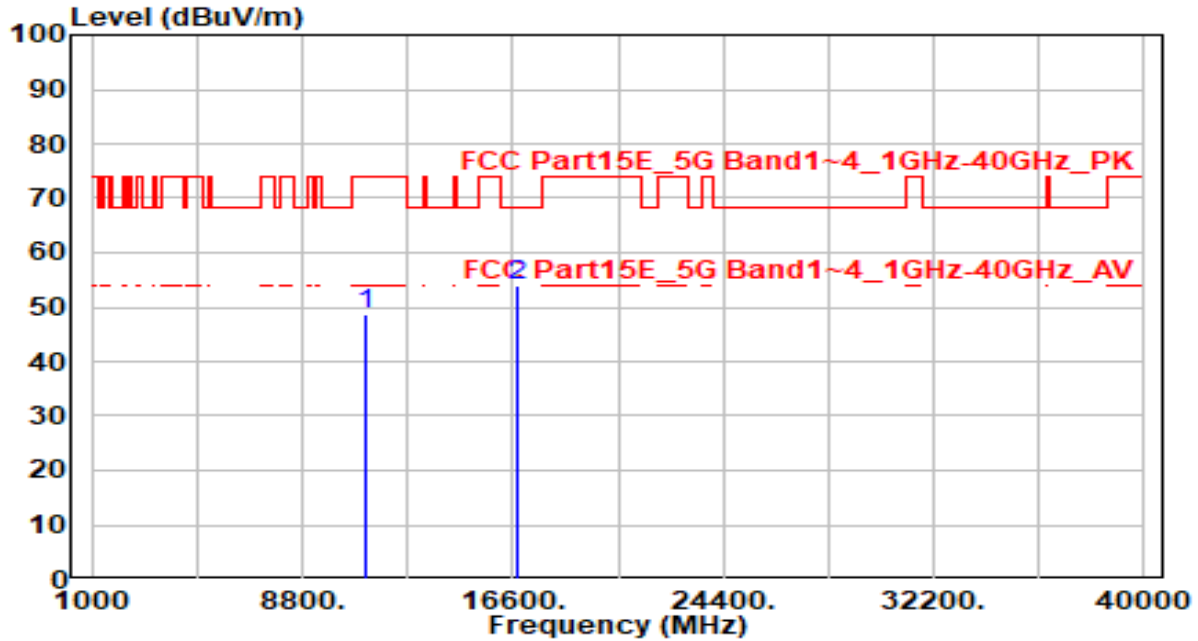


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	42.81	5.73	48.54	-25.46	74.00	150	360	Peak
2	* 16740.000	46.08	7.72	53.79	-14.41	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band3_CH 116_ANT 0	Test Voltage	AC 120V/60Hz

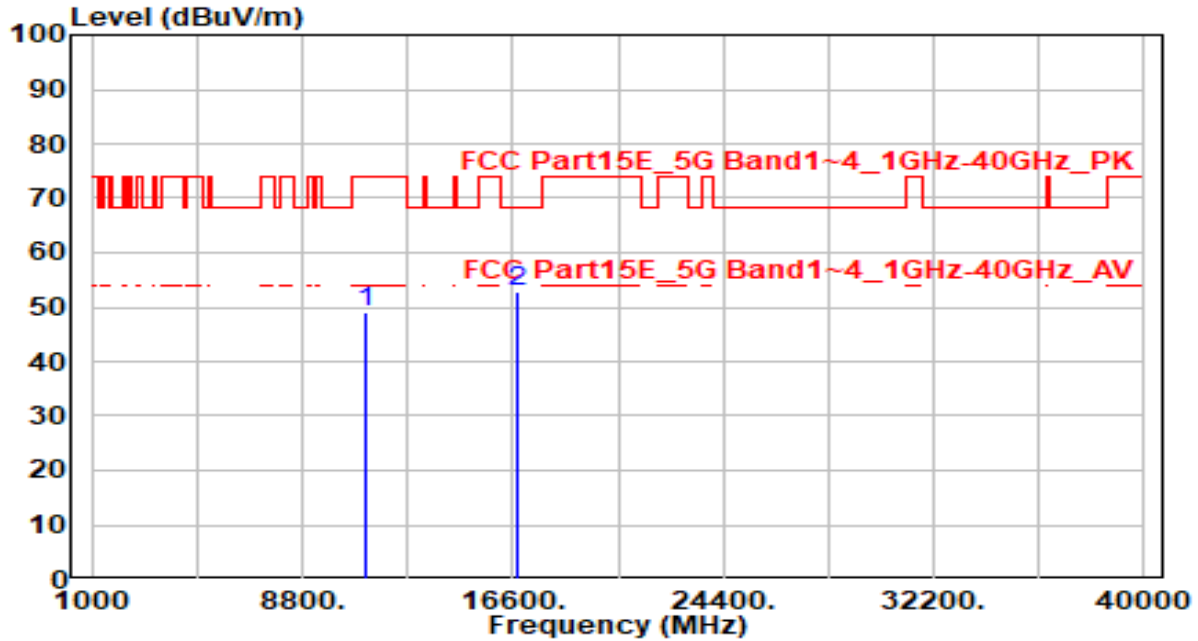


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	43.36	5.73	49.09	-24.91	74.00	150	360	Peak
2	* 16740.000	45.04	7.72	52.76	-15.44	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band3_CH 140_ANT 0	Test Voltage	AC 120V/60Hz

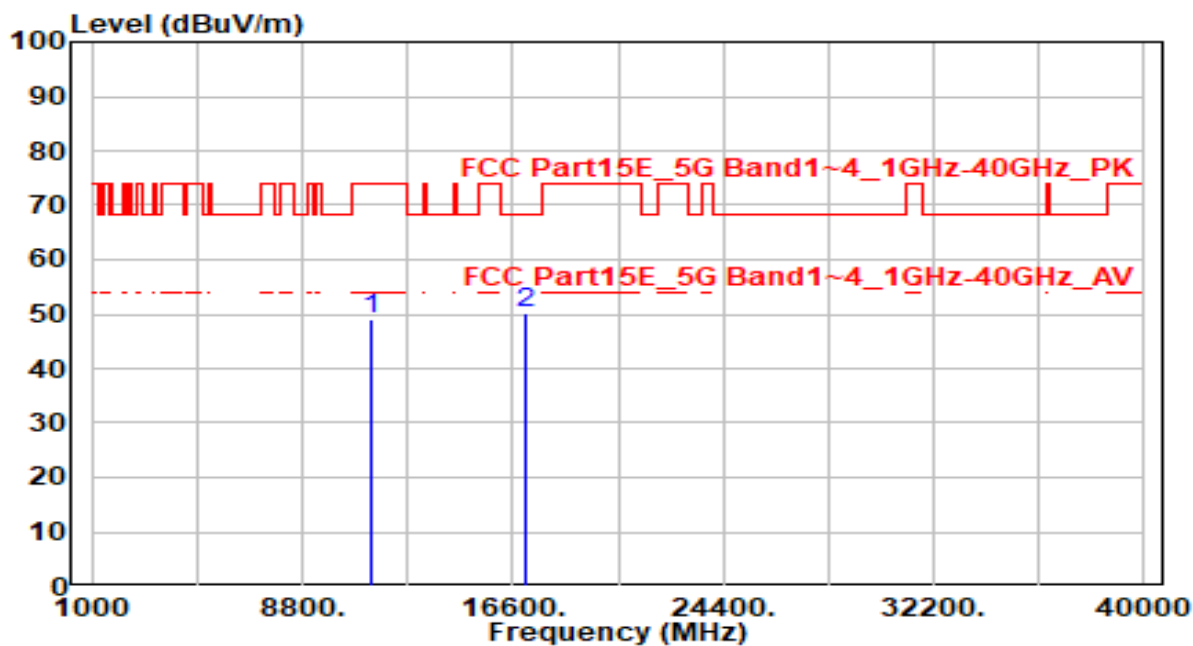


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	43.23	5.98	49.22	-24.78	74.00	150	360	Peak
2	* 17100.000	43.88	6.16	50.05	-18.15	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band3_CH 140_ANT 0	Test Voltage	AC 120V/60Hz

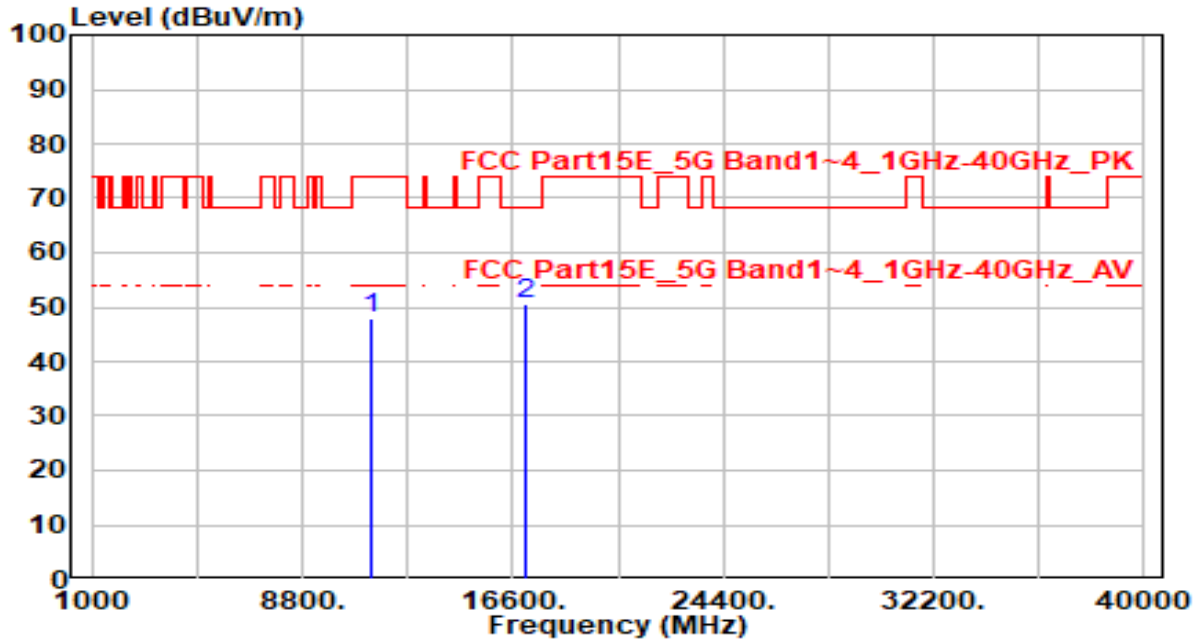


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	42.12	5.98	48.10	-25.90	74.00	150	360	Peak
2	* 17100.000	44.36	6.16	50.52	-17.68	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band3_CH 144_ANT 0	Test Voltage	AC 120V/60Hz

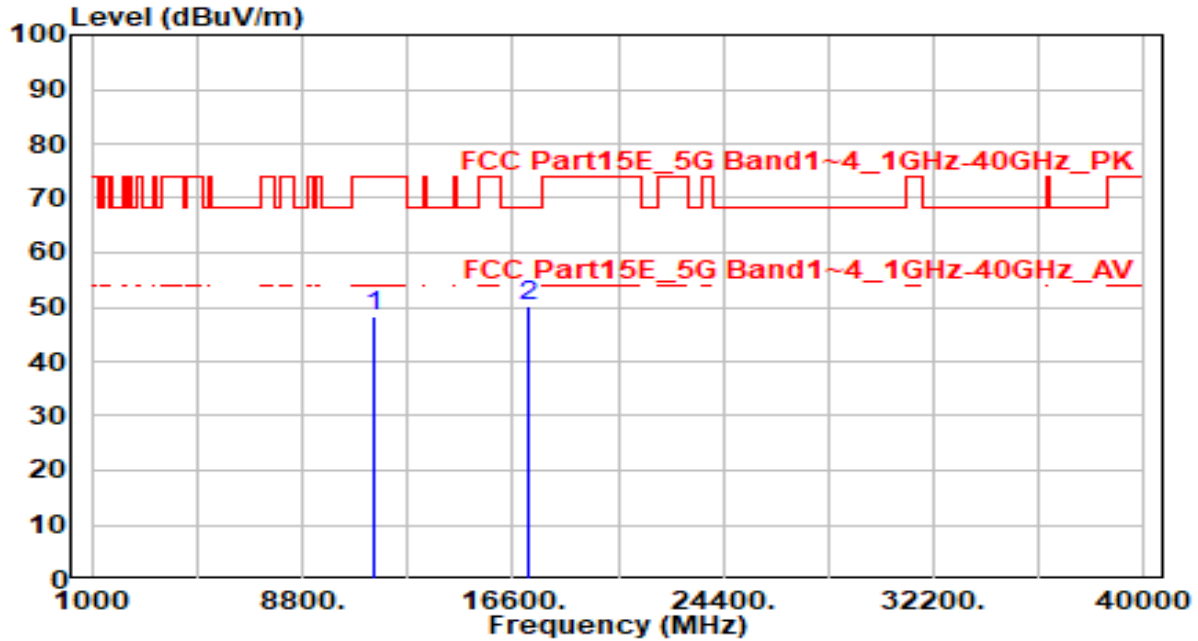


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	42.39	5.97	48.36	-25.64	74.00	150	360	Peak
2	* 17160.000	44.26	5.98	50.24	-17.96	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band3_CH 144_ANT 0	Test Voltage	AC 120V/60Hz

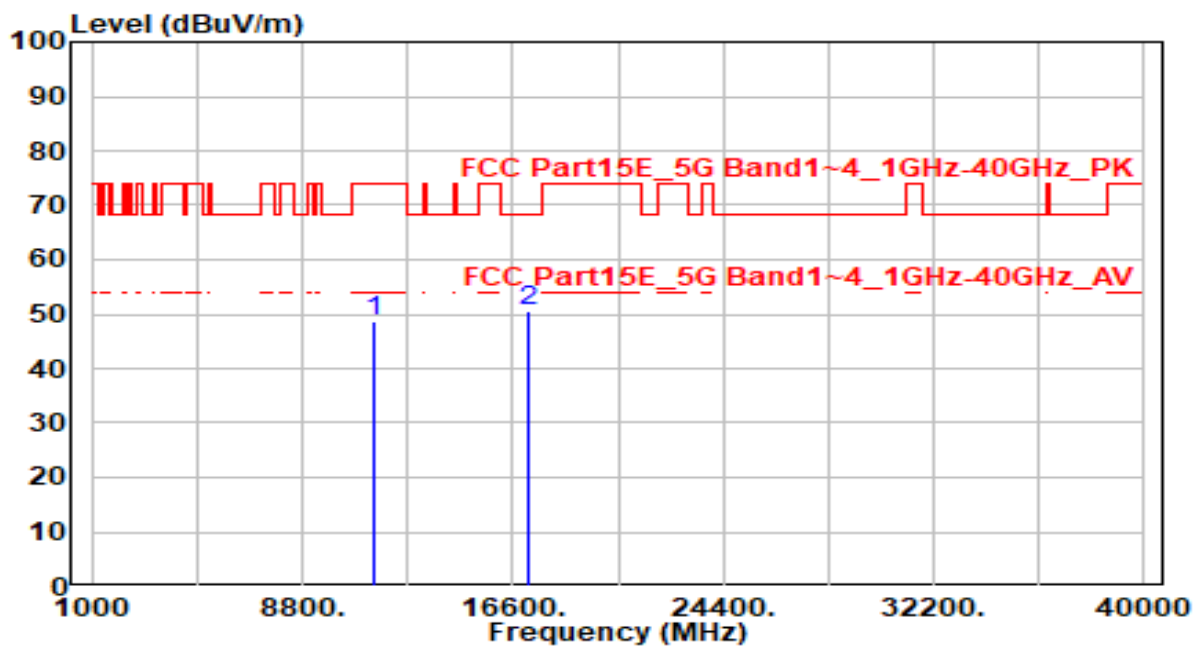


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	42.64	5.97	48.60	-25.40	74.00	150	360	Peak
2	* 17160.000	44.47	5.98	50.45	-17.75	68.20	150	360	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band4_CH 149_ANT 0	Test Voltage	AC 120V/60Hz

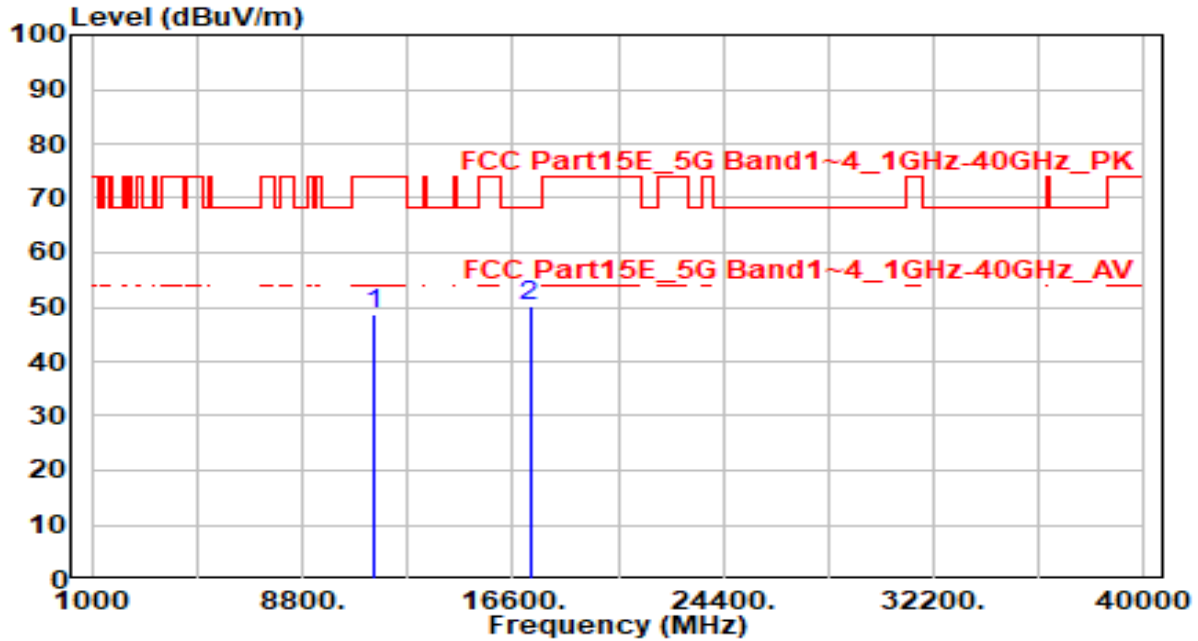


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	42.68	5.94	48.63	-25.37	74.00	150	360	Peak
2	* 17235.000	44.36	5.78	50.14	-18.06	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band4_CH 149_ANT 0	Test Voltage	AC 120V/60Hz

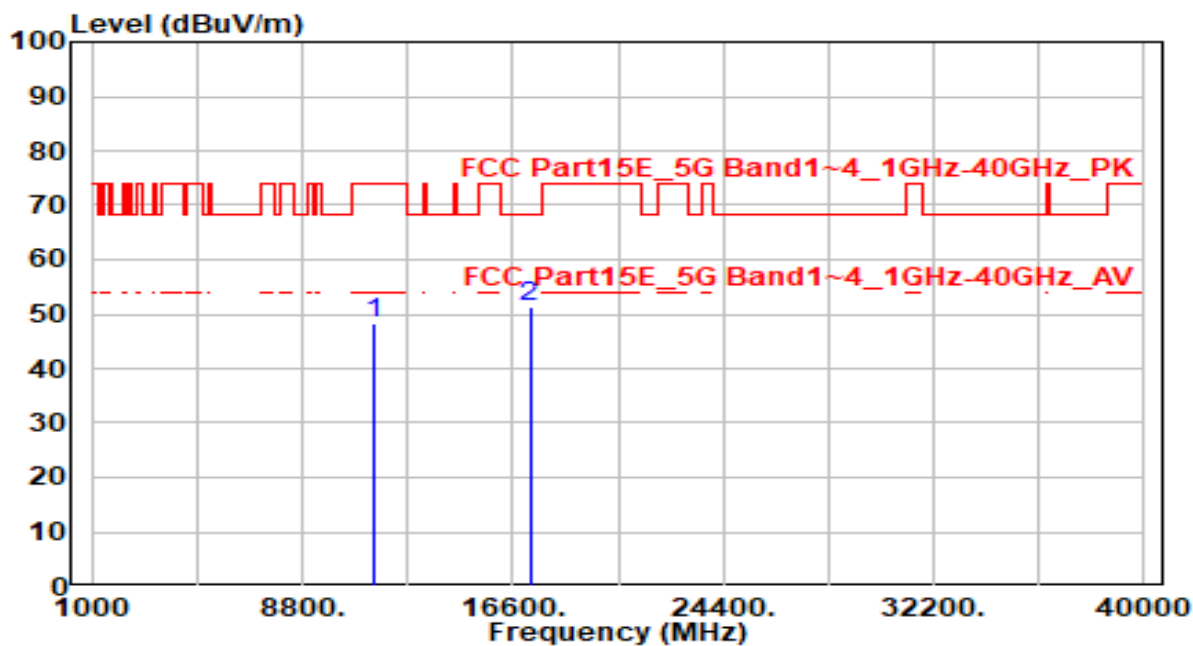


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	42.54	5.94	48.49	-25.51	74.00	150	360	Peak
2	* 17235.000	45.70	5.78	51.48	-16.72	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band4_CH 157_ANT 0	Test Voltage	AC 120V/60Hz

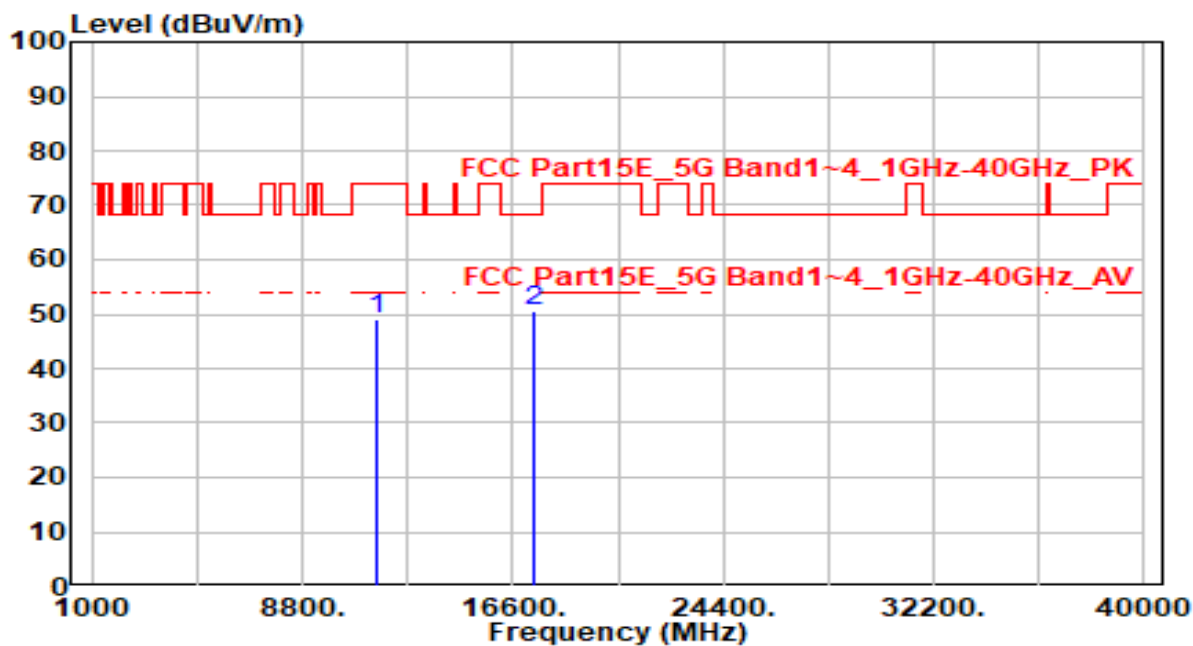


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	43.27	5.91	49.19	-24.81	74.00	150	360	Peak
2	* 17355.000	45.03	5.54	50.56	-17.64	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band4_CH 157_ANT 0	Test Voltage	AC 120V/60Hz

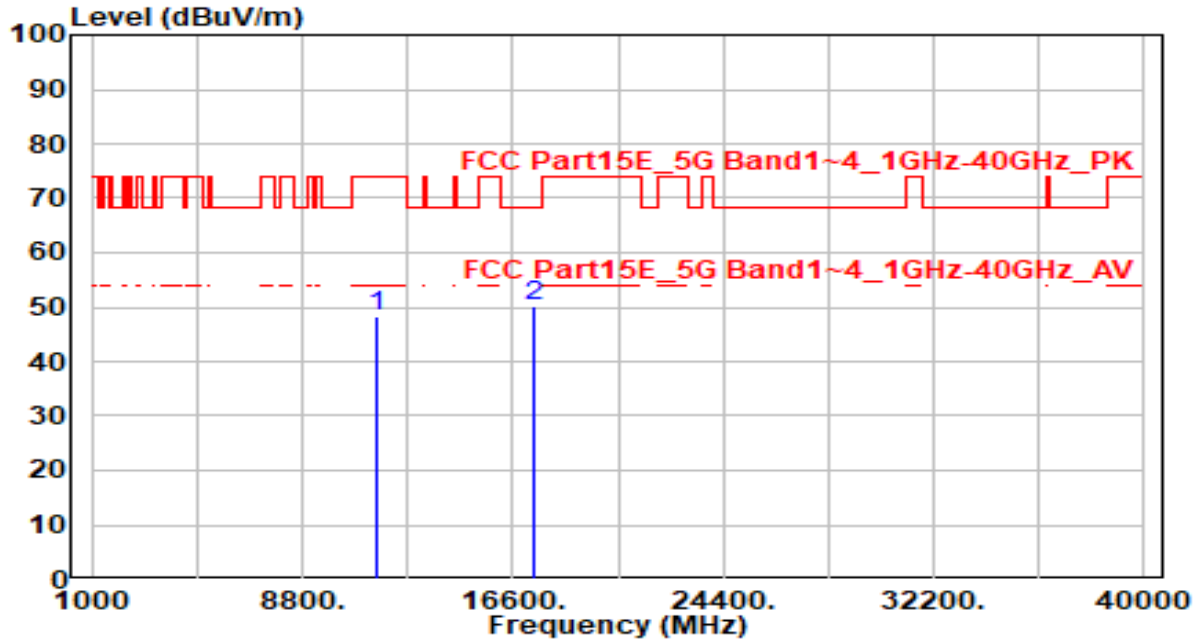


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	42.22	5.91	48.13	-25.87	74.00	150	360	Peak
2	* 17355.000	44.50	5.54	50.04	-18.16	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band4_CH 165_ANT 0	Test Voltage	AC 120V/60Hz

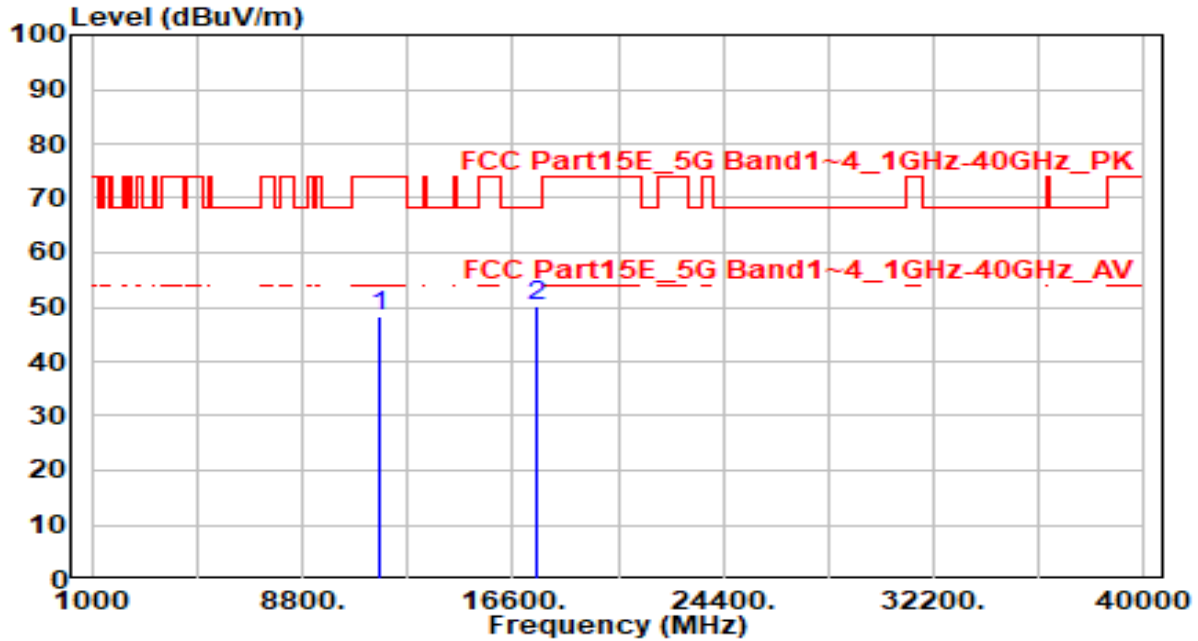


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	42.52	5.86	48.37	-25.63	74.00	150	360	Peak
2	* 17475.000	44.75	5.44	50.19	-18.01	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11a_TX_Band4_CH 165_ANT 0	Test Voltage	AC 120V/60Hz

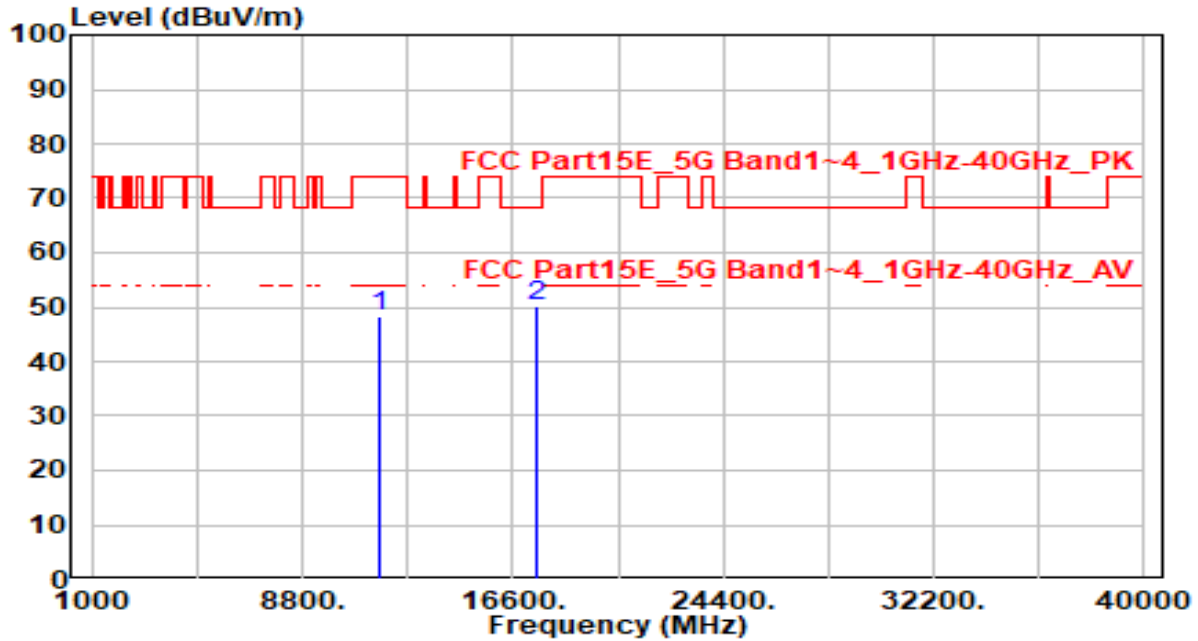


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	42.56	5.86	48.42	-25.58	74.00	150	360	Peak
2	* 17475.000	44.81	5.44	50.25	-17.95	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

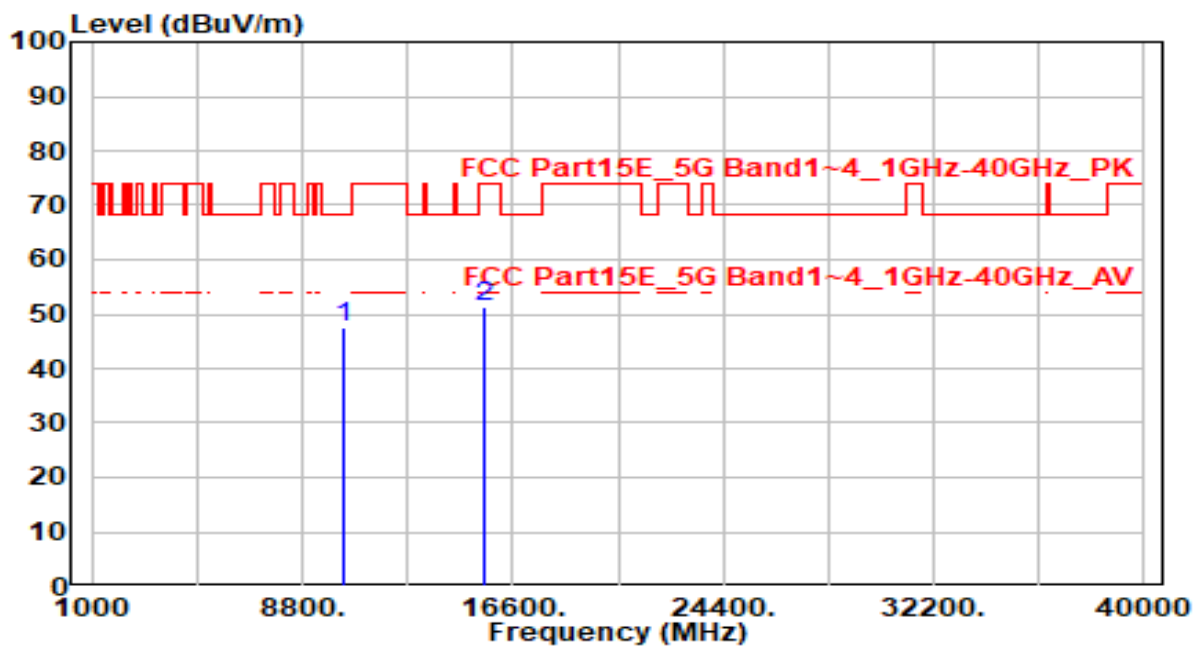


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10360.000	42.24	5.29	47.54	-20.66	68.20	150	360	Peak
2	15540.000	44.74	6.41	51.15	-22.85	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band1_CH 36_ANT 0	Test Voltage	AC 120V/60Hz

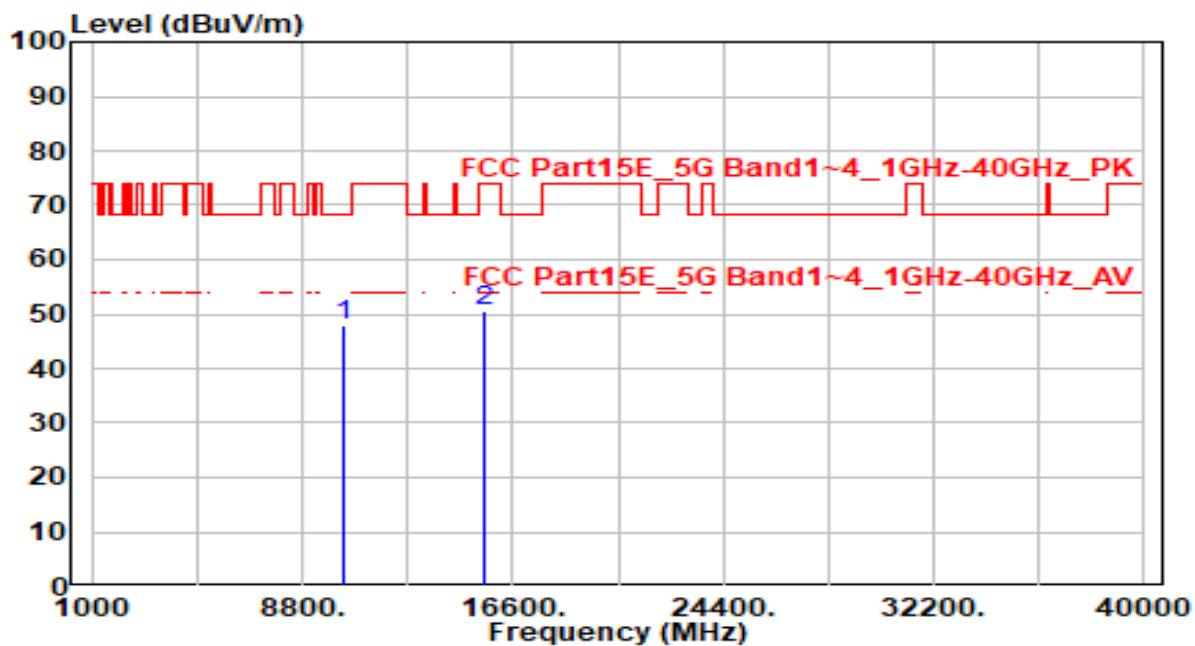


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10360.000	42.62	5.29	47.91	-20.29	68.20	150	360	Peak
2	15540.000	44.11	6.41	50.52	-23.48	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band1_CH 44_ANT 0	Test Voltage	AC 120V/60Hz

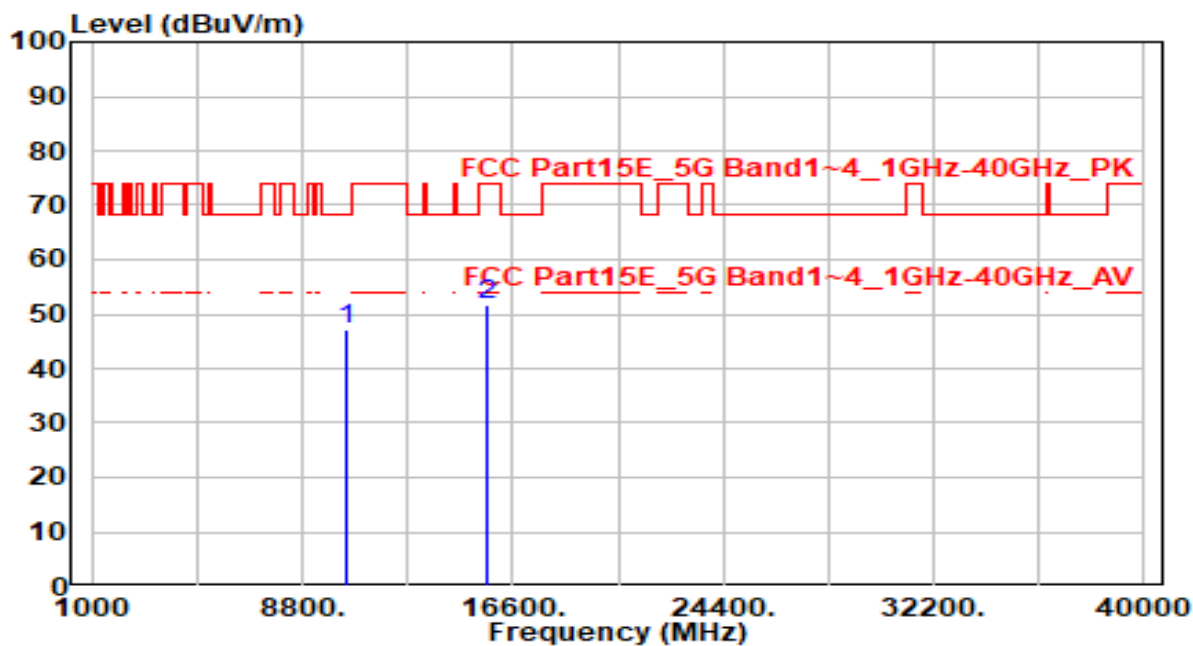


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	41.72	5.28	47.00	-21.20	68.20	150	360	Peak
2		15660.000	45.25	6.56	51.80	-22.20	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band1_CH 44_ANT 0	Test Voltage	AC 120V/60Hz

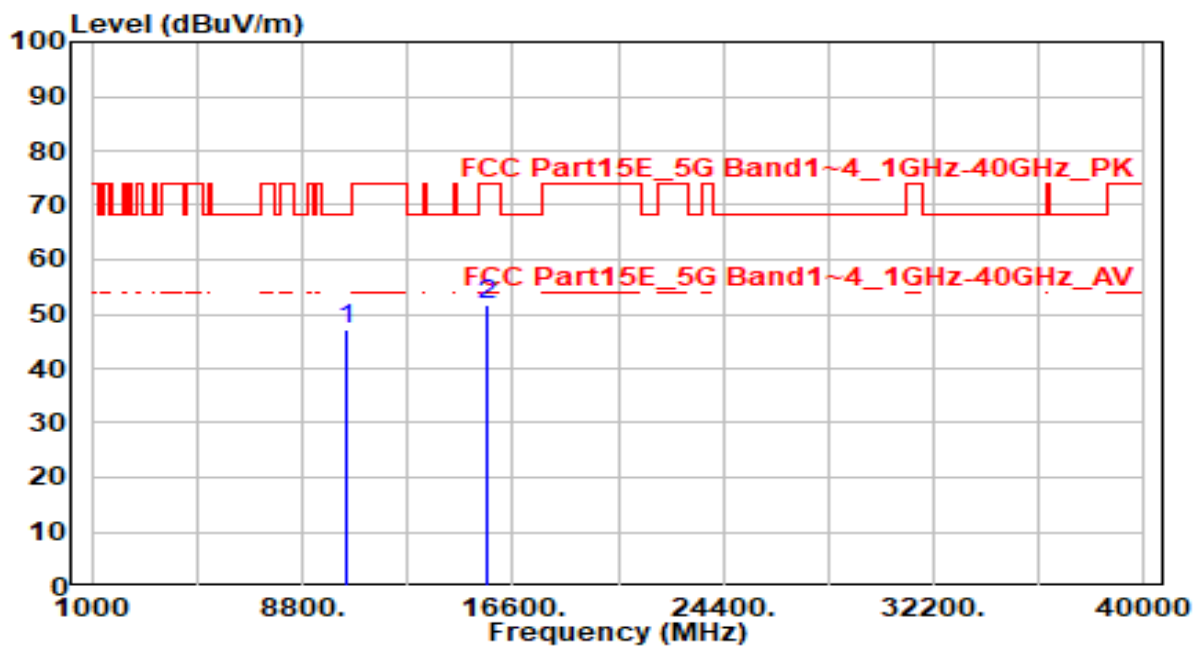


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10440.000	41.83	5.28	47.10	-21.10	68.20	150	360	Peak
2	15660.000	45.23	6.56	51.79	-22.21	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band1_CH 48_ANT 0	Test Voltage	AC 120V/60Hz

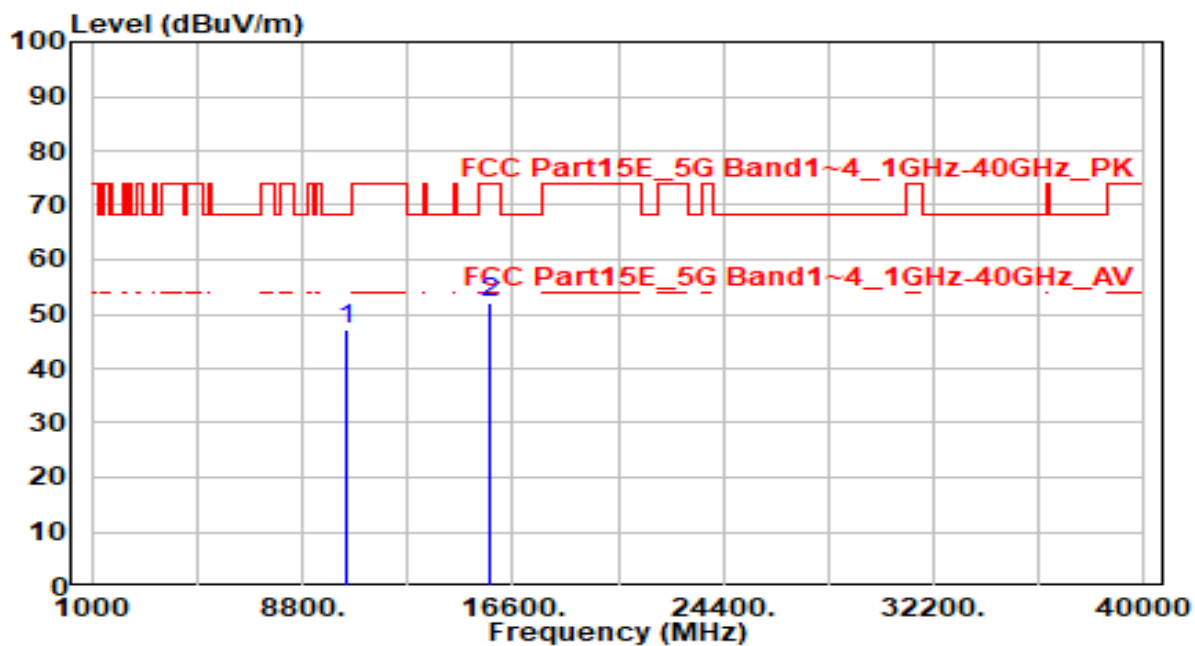


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10480.000	41.89	5.26	47.15	-21.05	68.20	150	360	Peak
2	15720.000	45.27	6.69	51.97	-22.03	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band1_CH 48_ANT 0	Test Voltage	AC 120V/60Hz

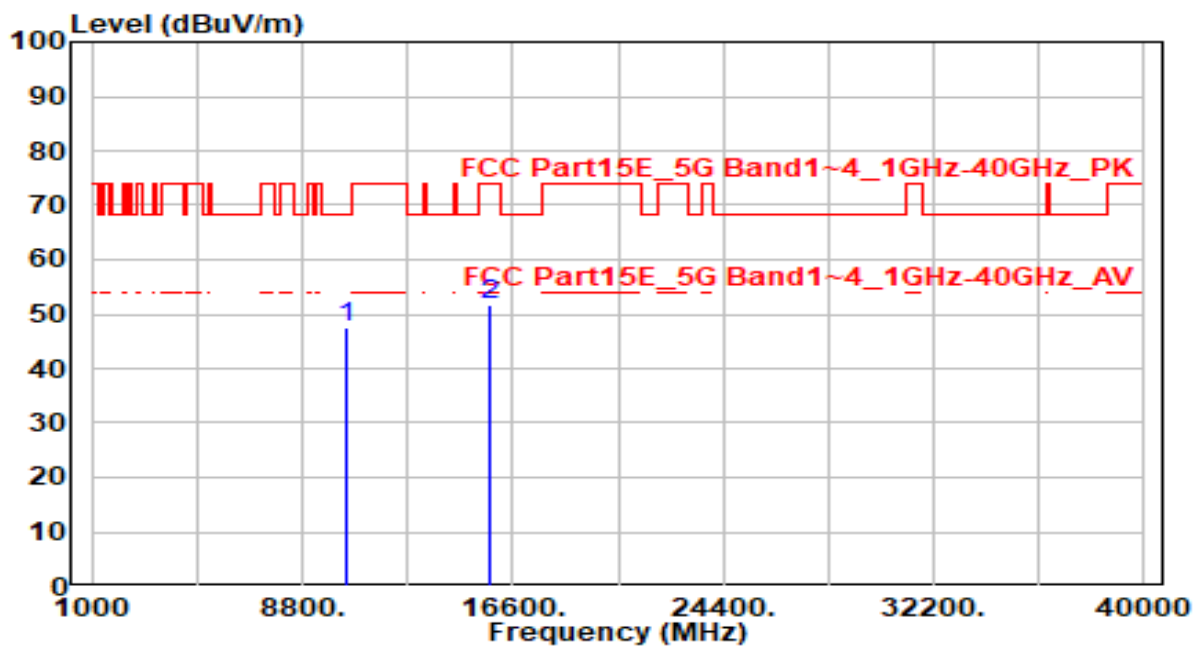


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	42.17	5.26	47.43	-20.77	68.20	150	360	Peak
2		15720.000	45.14	6.69	51.83	-22.17	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band2_CH 52_ANT 0	Test Voltage	AC 120V/60Hz

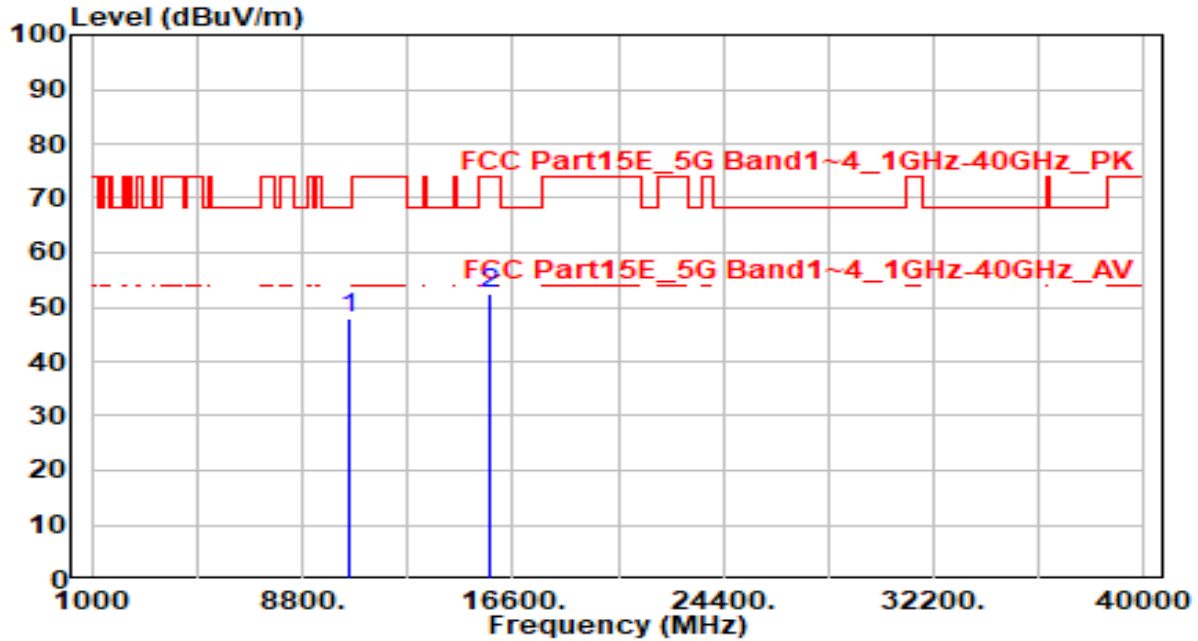


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10520.000	42.78	5.25	48.03	-20.17	68.20	150	360	Peak
2	15780.000	45.67	6.83	52.50	-21.50	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band2_CH 52_ANT 0	Test Voltage	AC 120V/60Hz

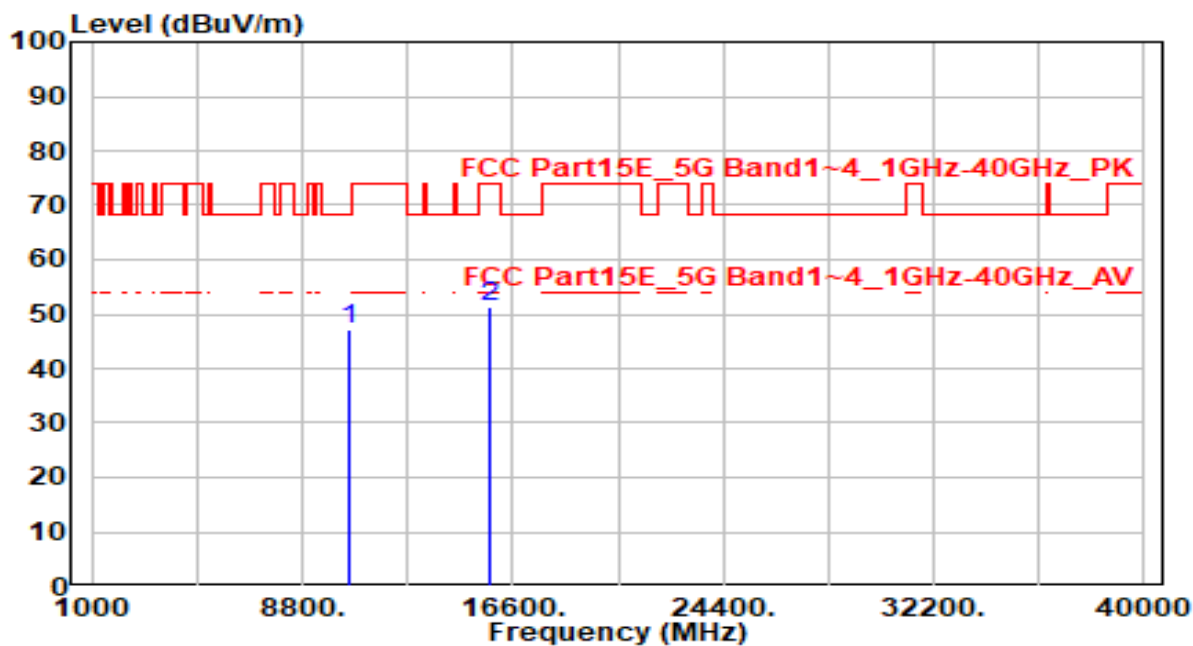


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10520.000	41.85	5.25	47.11	-21.09	68.20	150	360	Peak
2	15780.000	44.51	6.83	51.34	-22.66	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band2_CH 60_ANT 0	Test Voltage	AC 120V/60Hz

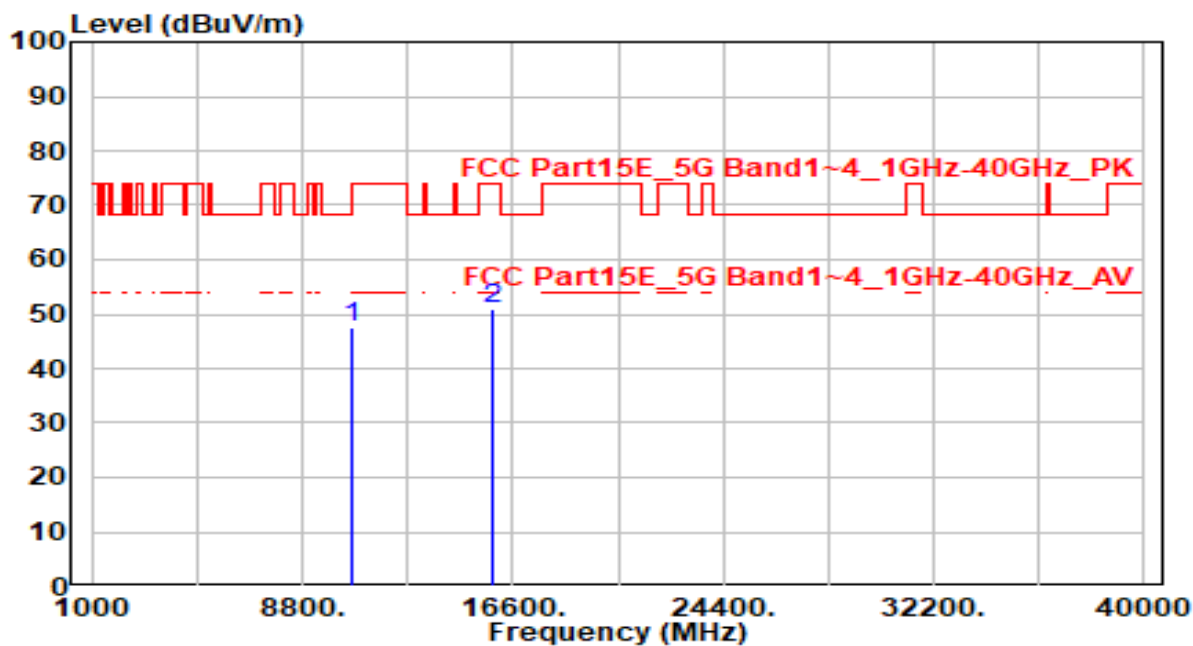


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10600.000	42.14	5.25	47.40	-20.80	68.20	150	360	Peak
2	15900.000	44.04	6.95	50.99	-23.01	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band2_CH 60_ANT 0	Test Voltage	AC 120V/60Hz

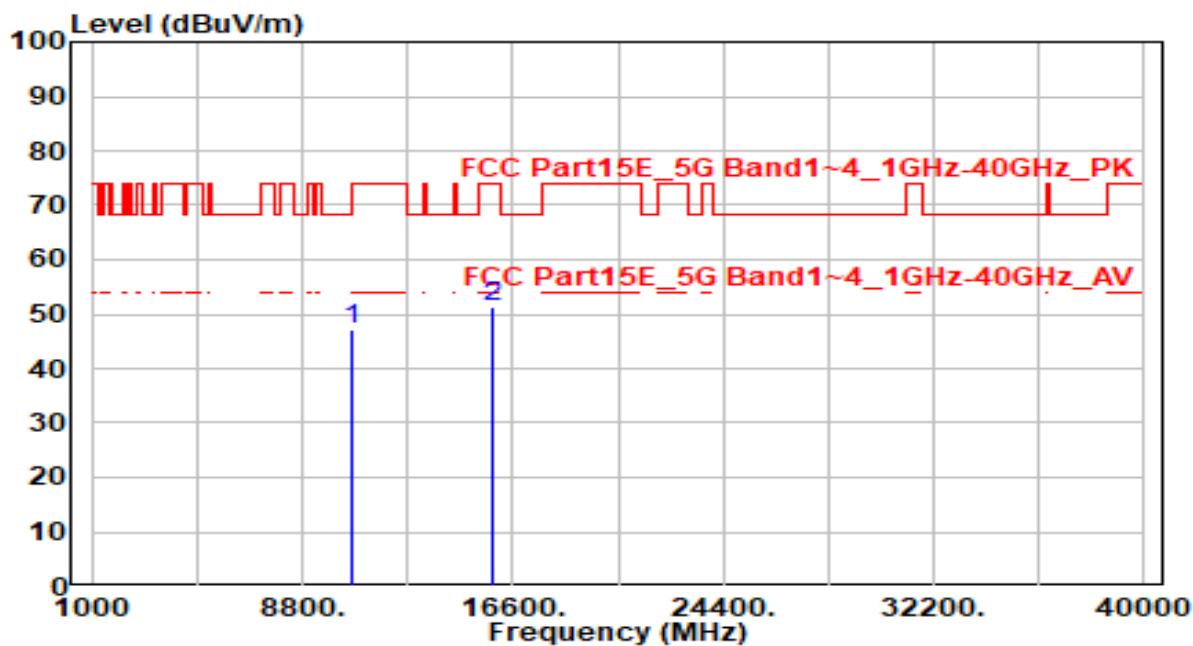


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10600.000	41.97	5.25	47.22	-20.98	68.20	150	360	Peak
2	15900.000	44.47	6.95	51.42	-22.58	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band2_CH 64_ANT 0	Test Voltage	AC 120V/60Hz

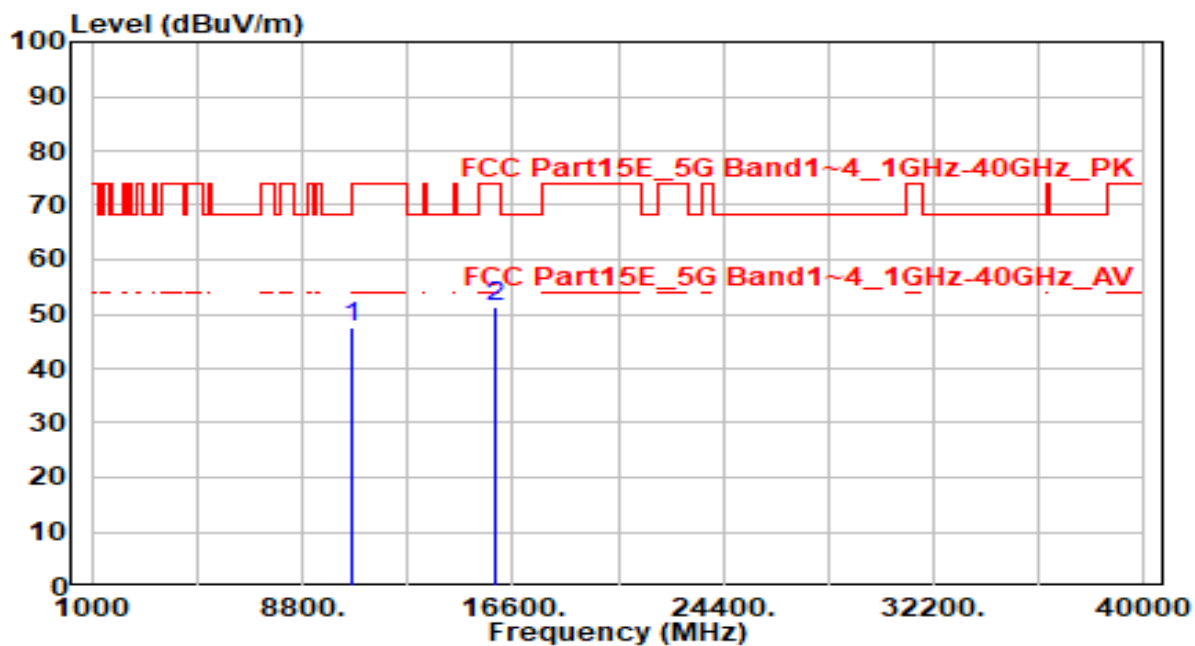


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	42.26	5.27	47.53	-26.47	74.00	150	360	Peak
2	* 15960.000	44.39	7.00	51.39	-22.61	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band2_CH 64_ANT 0	Test Voltage	AC 120V/60Hz

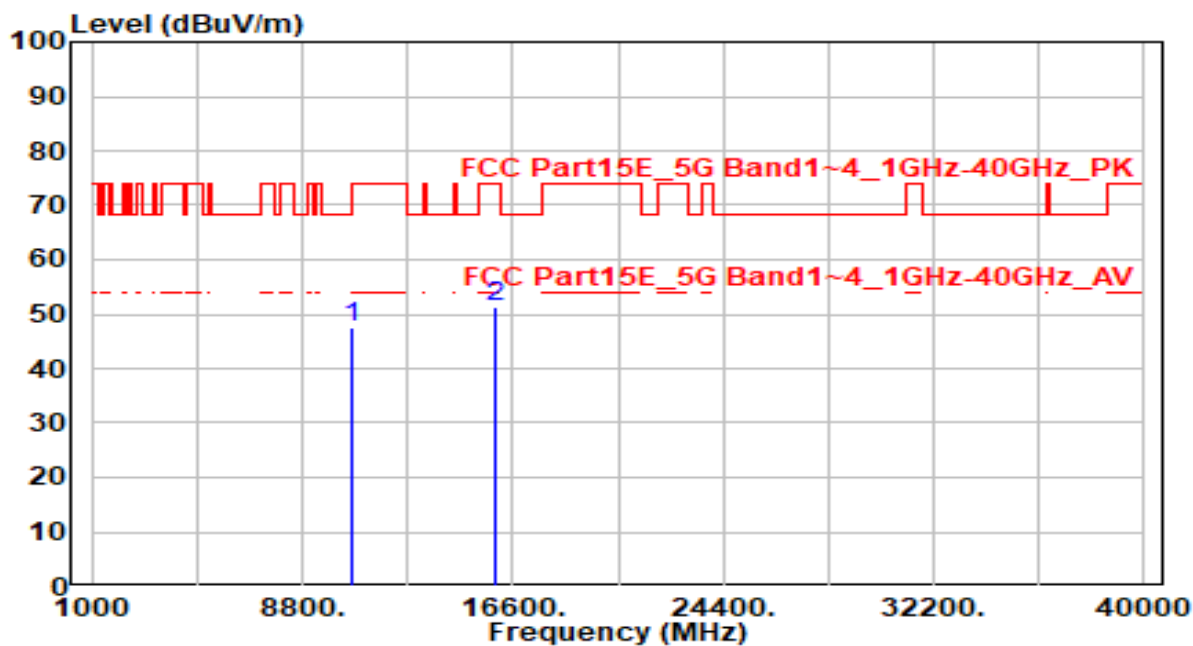


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	42.17	5.27	47.45	-26.55	74.00	150	360	Peak
2	* 15960.000	44.20	7.00	51.20	-22.80	74.00	150	360	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band3_CH 100_ANT 0	Test Voltage	AC 120V/60Hz

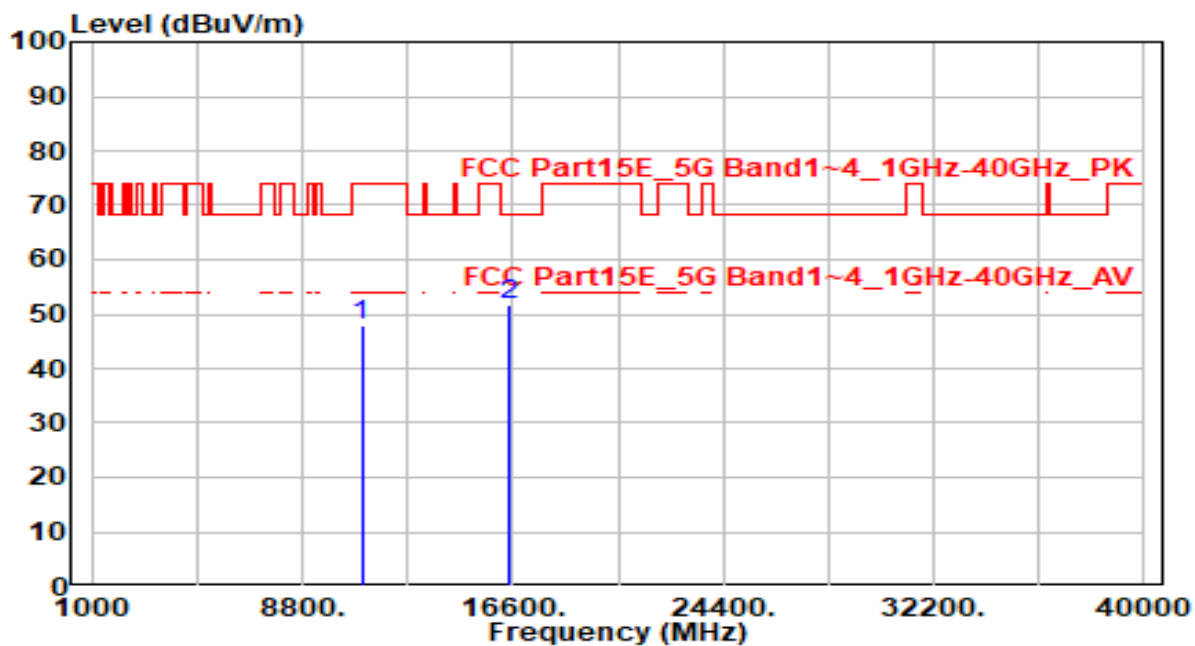


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	42.28	5.56	47.84	-26.16	74.00	150	360	Peak
2	* 16500.000	44.30	7.34	51.64	-16.56	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band3_CH 100_ANT 0	Test Voltage	AC 120V/60Hz

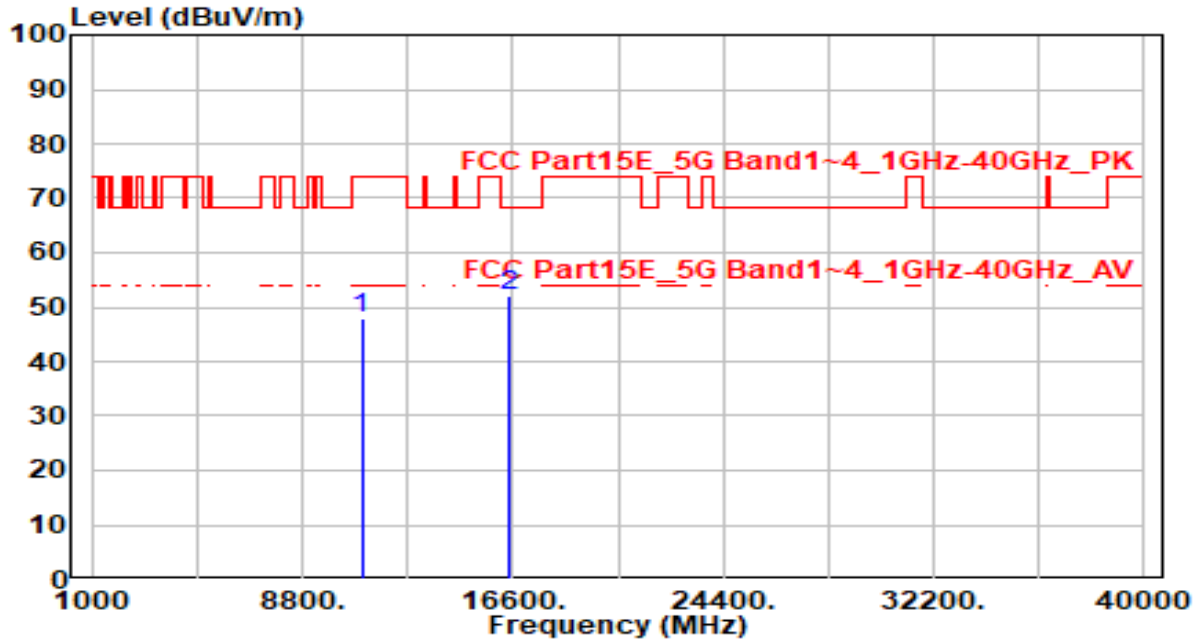


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	42.47	5.56	48.03	-25.97	74.00	150	360	Peak
2	* 16500.000	44.62	7.34	51.97	-16.23	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band3_CH 116_ANT 0	Test Voltage	AC 120V/60Hz

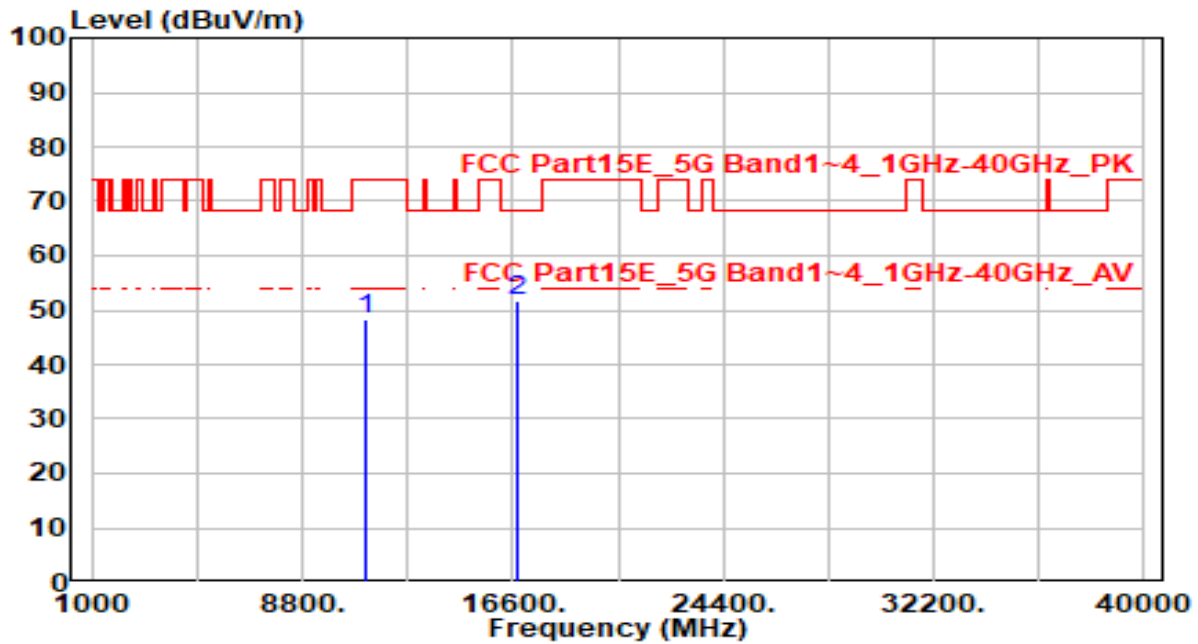


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	42.72	5.73	48.45	-25.55	74.00	150	360	Peak
2	* 16740.000	44.16	7.72	51.88	-16.32	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band3_CH 116_ANT 0	Test Voltage	AC 120V/60Hz

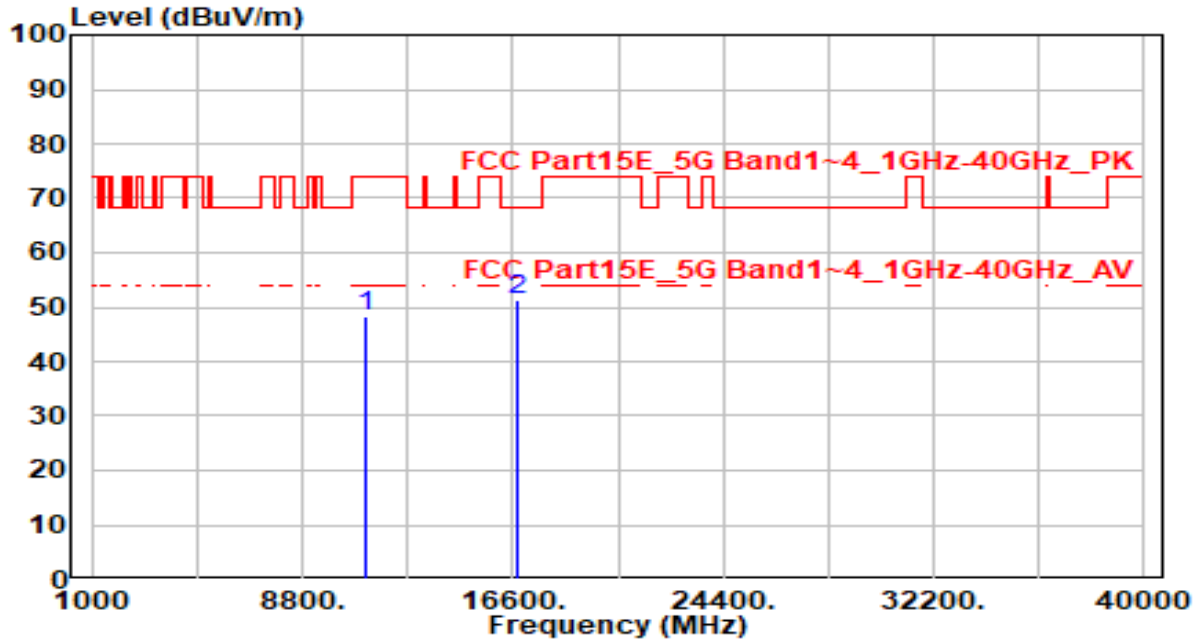


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	42.45	5.73	48.18	-25.82	74.00	150	360	Peak
2	* 16740.000	43.70	7.72	51.42	-16.78	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band3_CH 140_ANT 0	Test Voltage	AC 120V/60Hz

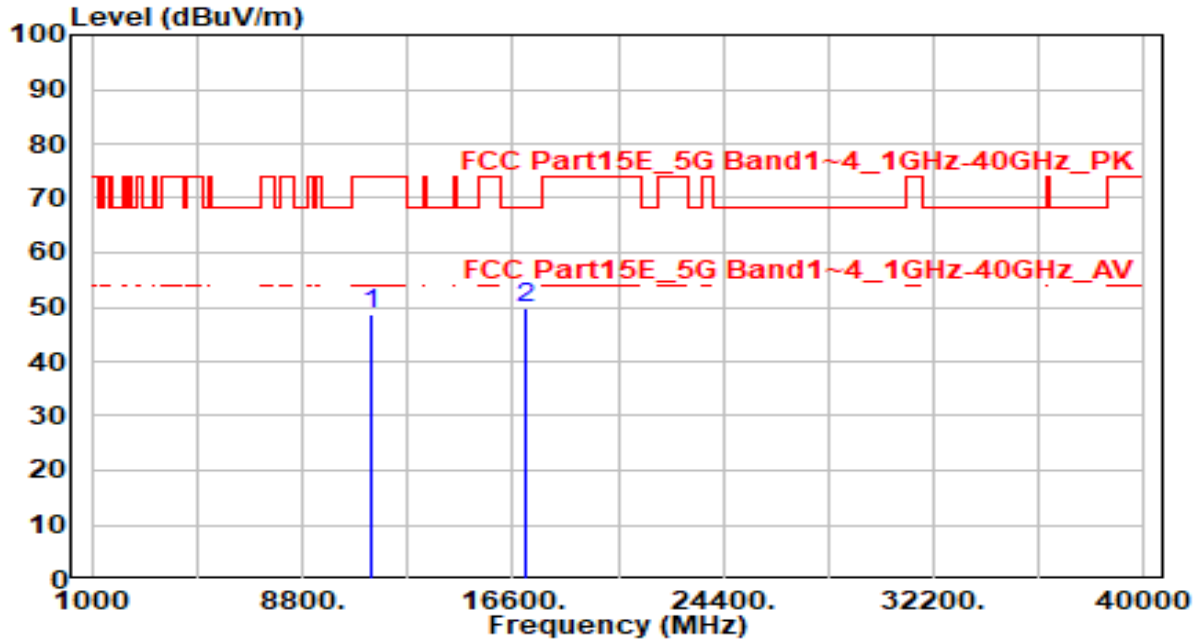


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	42.73	5.98	48.72	-25.28	74.00	150	360	Peak
2	* 17100.000	43.61	6.16	49.77	-18.43	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band3_CH 140_ANT 0	Test Voltage	AC 120V/60Hz

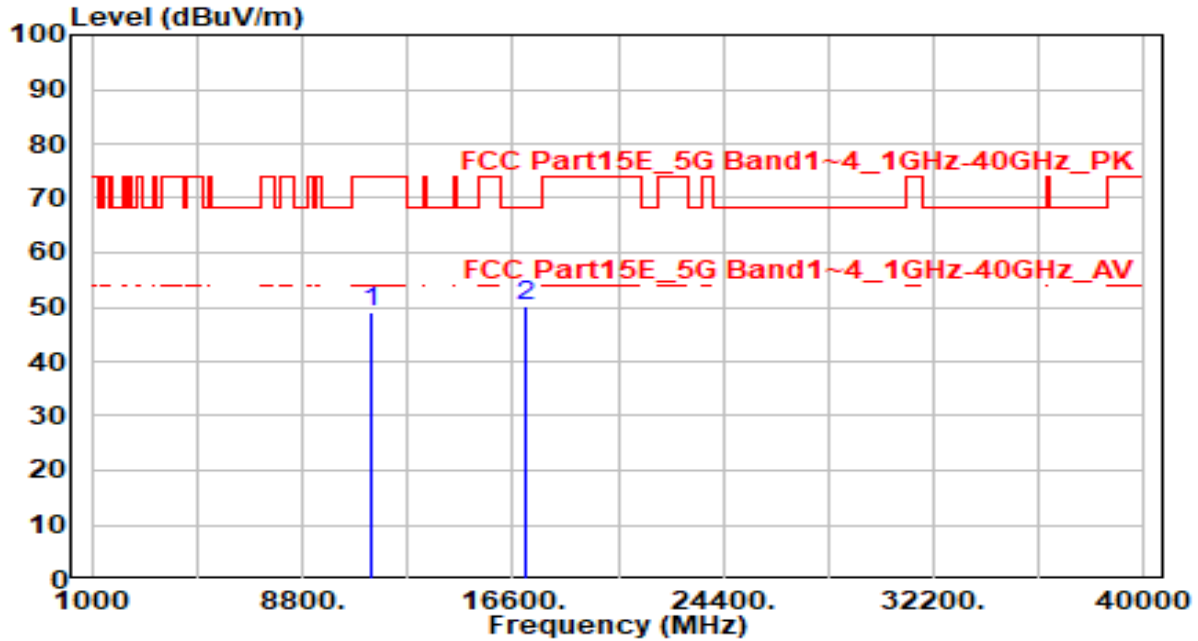


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	42.99	5.98	48.97	-25.03	74.00	150	360	Peak
2	* 17100.000	44.14	6.16	50.30	-17.90	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band3_CH 144_ANT 0	Test Voltage	AC 120V/60Hz

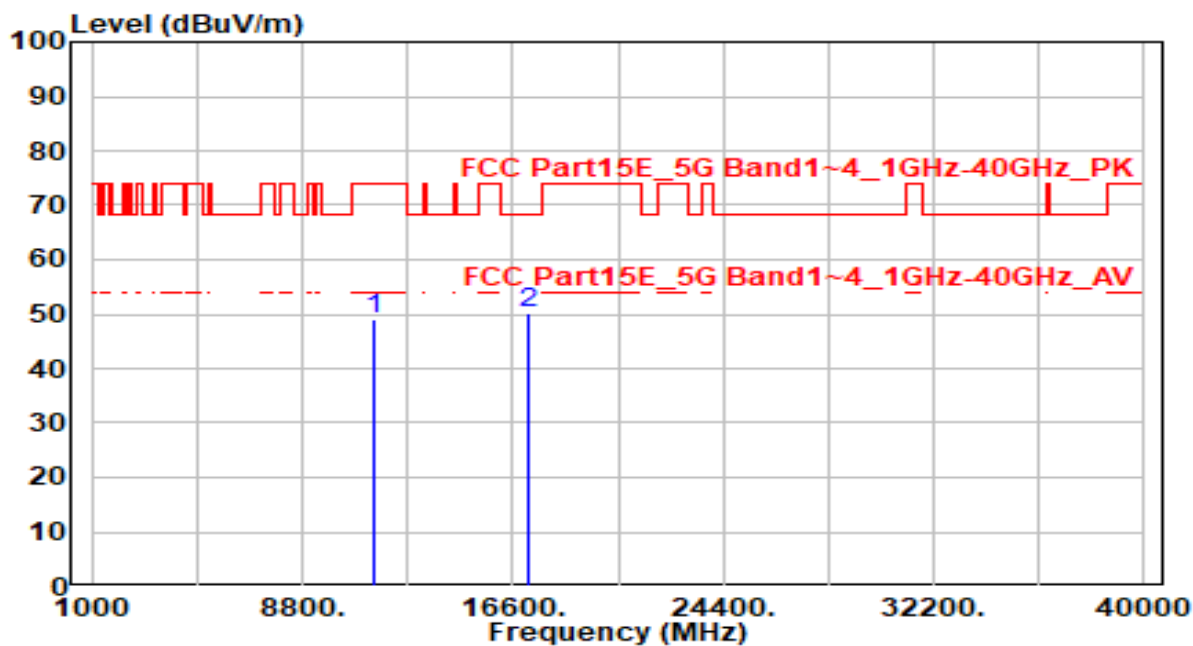


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	43.05	5.97	49.01	-24.99	74.00	150	360	Peak
2	* 17160.000	44.25	5.98	50.23	-17.97	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band3_CH 144_ANT 0	Test Voltage	AC 120V/60Hz

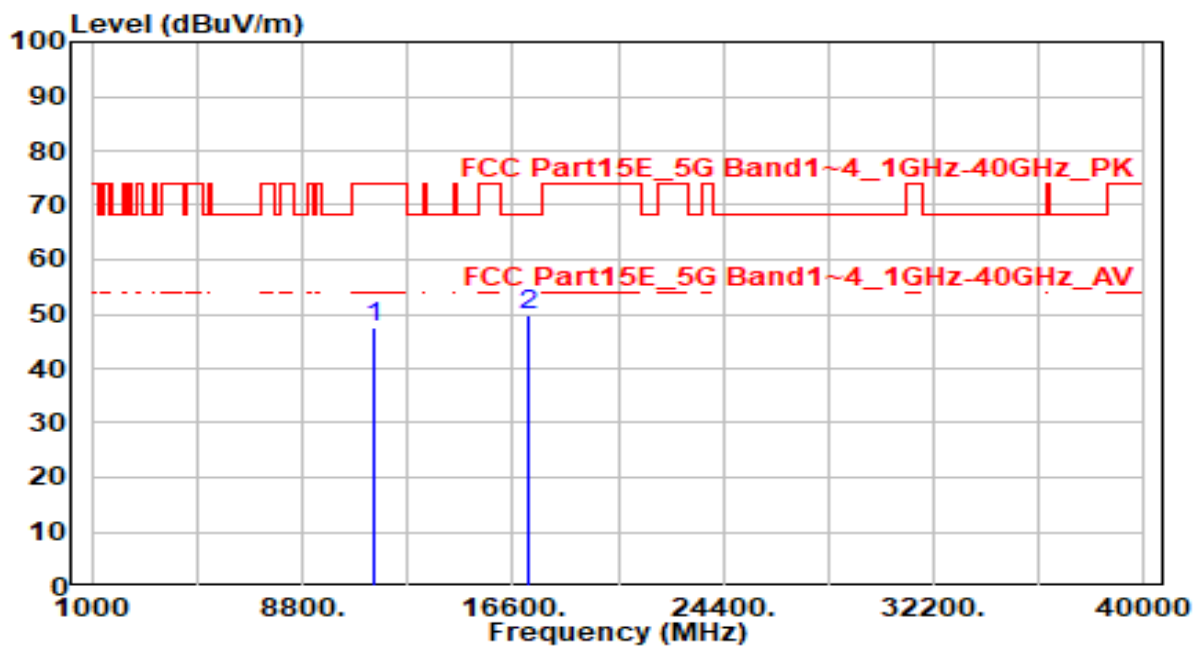


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	41.74	5.97	47.70	-26.30	74.00	150	360	Peak
2	* 17160.000	44.00	5.98	49.98	-18.22	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band4_CH 149_ANT 0	Test Voltage	AC 120V/60Hz

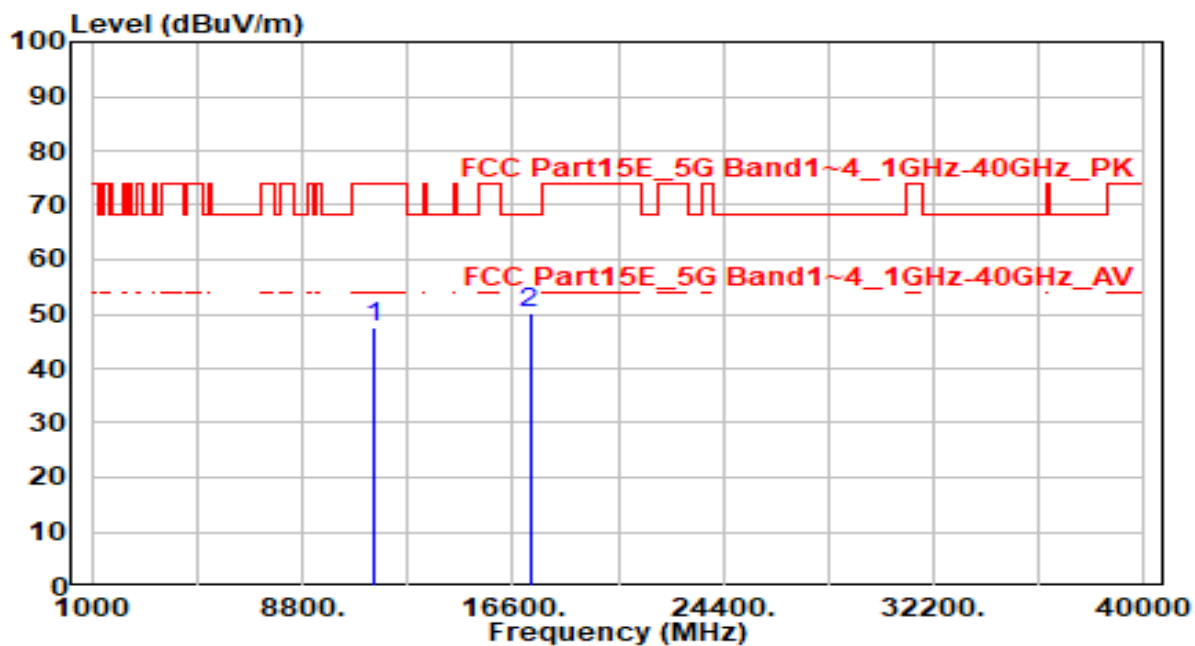


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	41.71	5.94	47.65	-26.35	74.00	150	360	Peak
2	* 17235.000	44.37	5.78	50.15	-18.05	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band4_CH 149_ANT 0	Test Voltage	AC 120V/60Hz

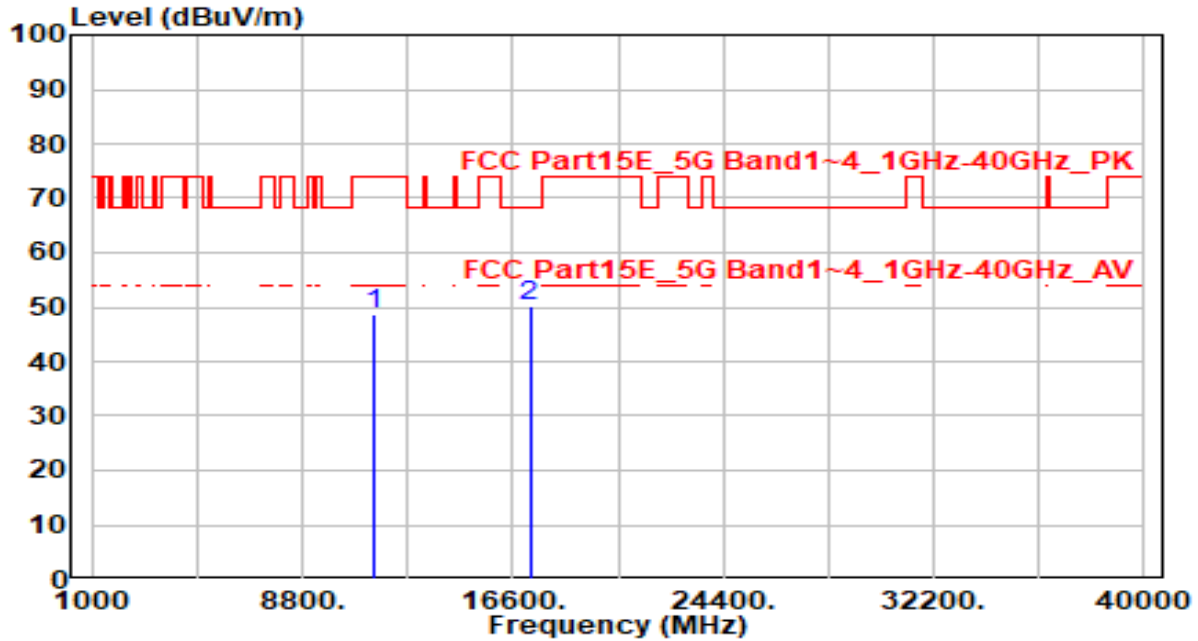


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	42.92	5.94	48.87	-25.13	74.00	150	360	Peak
2	* 17235.000	44.39	5.78	50.17	-18.03	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band4_CH 157_ANT 0	Test Voltage	AC 120V/60Hz

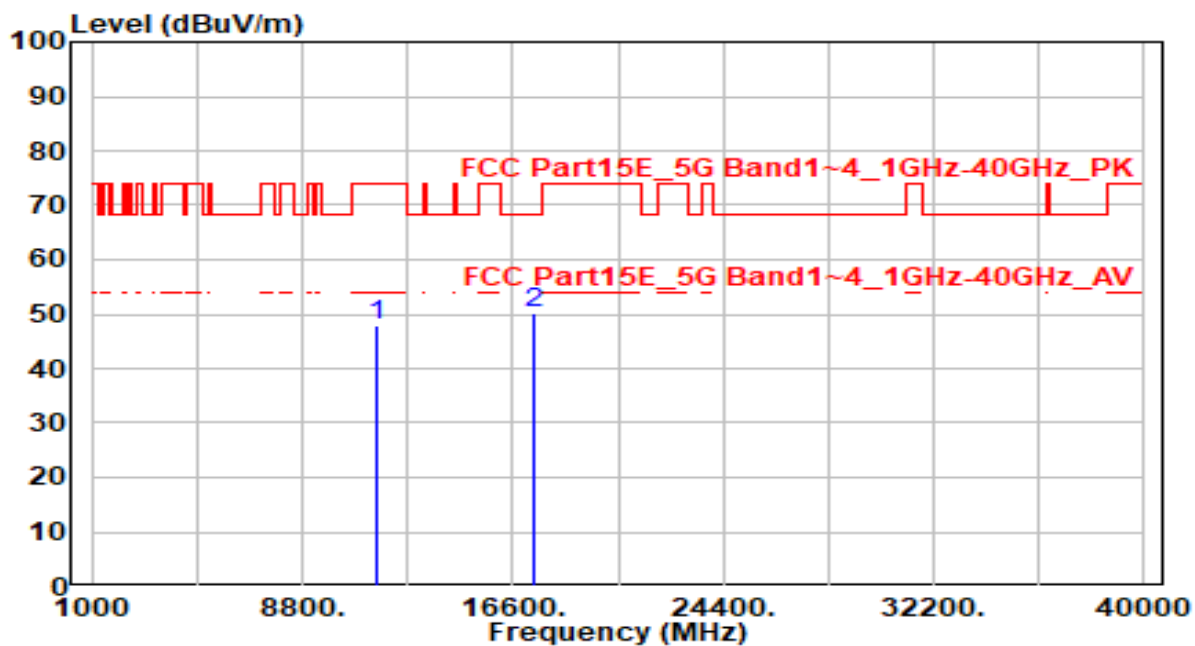


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	42.11	5.91	48.02	-25.98	74.00	150	360	Peak
2	* 17355.000	44.73	5.54	50.27	-17.93	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band4_CH 157_ANT 0	Test Voltage	AC 120V/60Hz

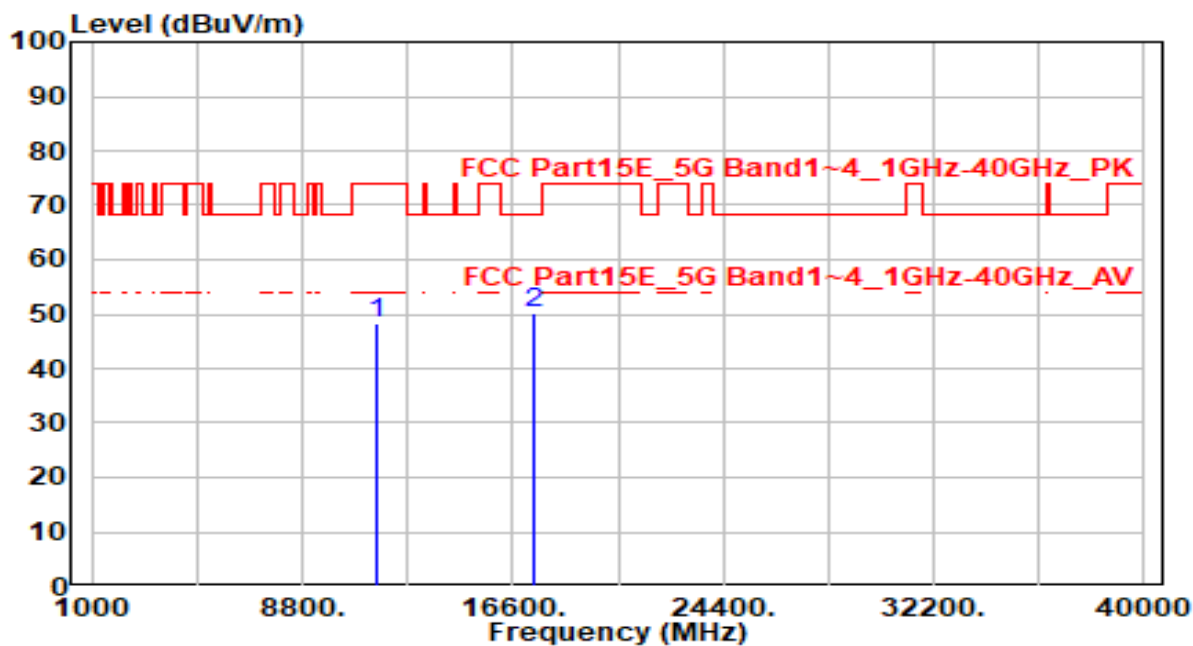


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	42.31	5.91	48.22	-25.78	74.00	150	360	Peak
2	* 17355.000	44.48	5.54	50.02	-18.18	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band4_CH 165_ANT 0	Test Voltage	AC 120V/60Hz

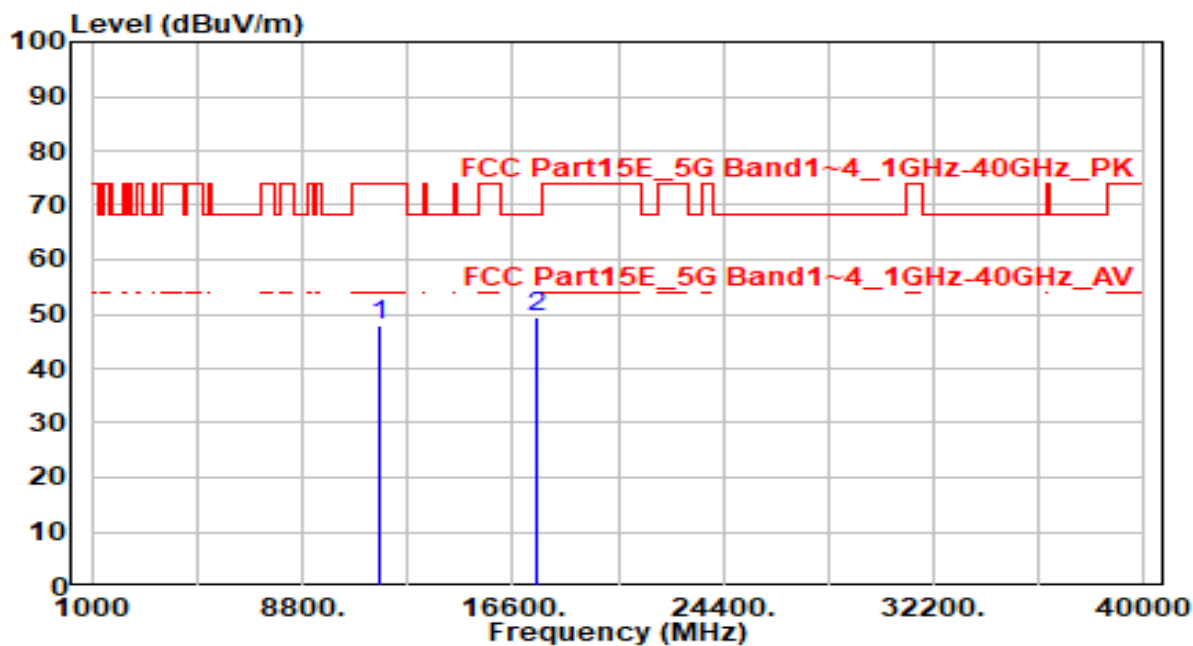


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	42.11	5.86	47.97	-26.03	74.00	150	360	Peak
2	* 17475.000	44.16	5.44	49.60	-18.60	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-20MHz_TX_Band4_CH 165_ANT 0	Test Voltage	AC 120V/60Hz

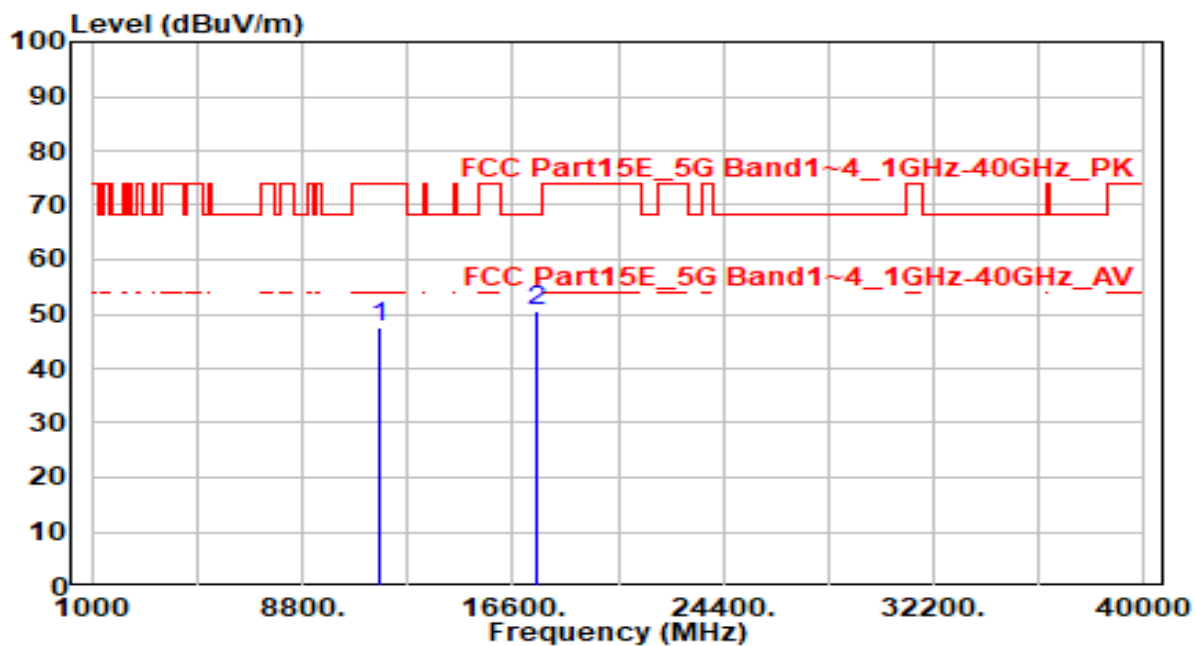


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	41.61	5.86	47.47	-26.53	74.00	150	360	Peak
2	* 17475.000	45.05	5.44	50.48	-17.72	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band1_CH 38_ANT 0	Test Voltage	AC 120V/60Hz

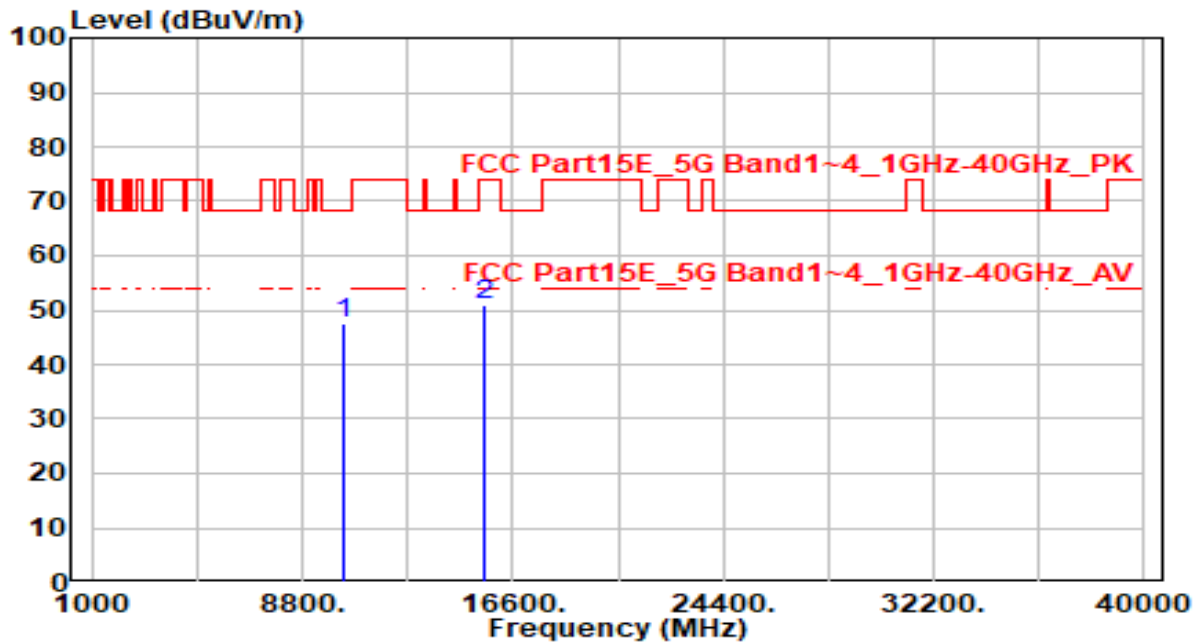


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10380.000	42.17	5.30	47.47	-20.73	68.20	150	360	Peak
2	15570.000	44.37	6.41	50.79	-23.21	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band1_CH 38_ANT 0	Test Voltage	AC 120V/60Hz

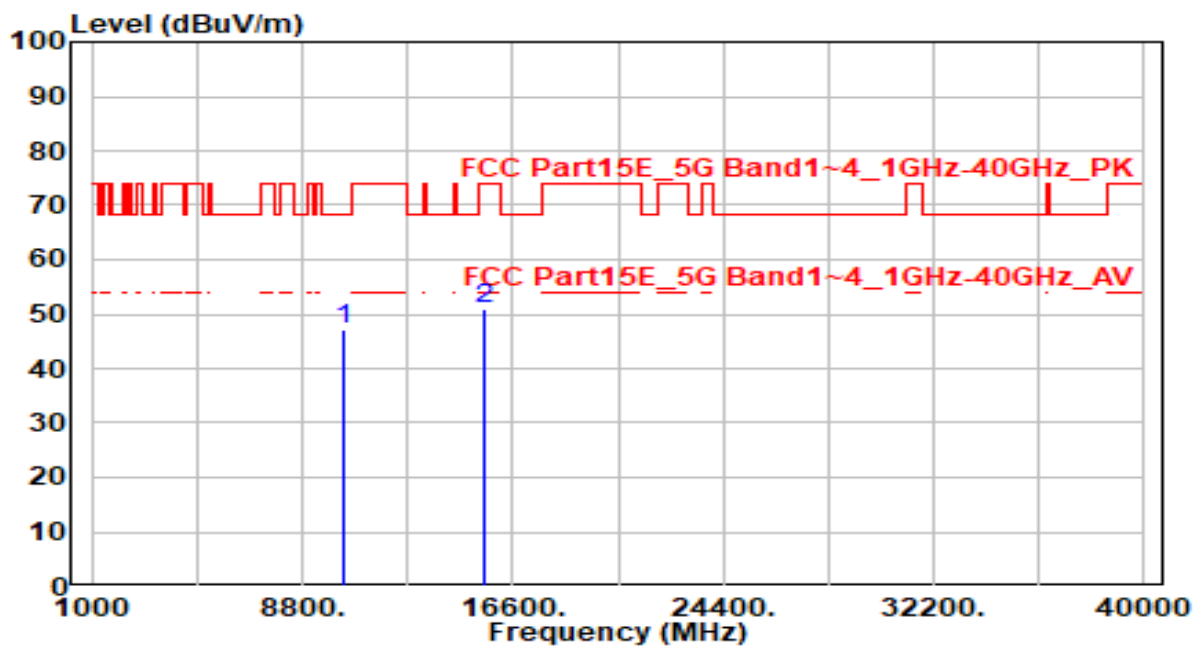


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10380.000	41.85	5.30	47.14	-21.06	68.20	150	360	Peak
2	15570.000	44.52	6.41	50.94	-23.06	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band1_CH 46_ANT 0	Test Voltage	AC 120V/60Hz

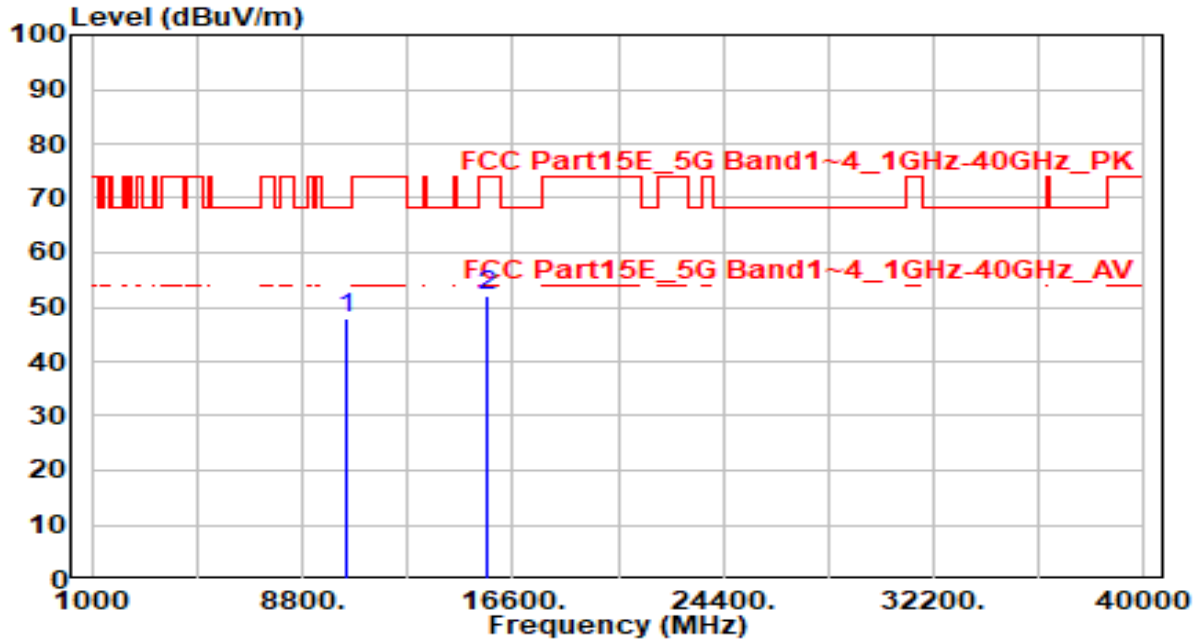


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	42.57	5.27	47.84	-20.36	68.20	150	360	Peak
2		15690.000	45.48	6.63	52.11	-21.89	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band1_CH 46_ANT 0	Test Voltage	AC 120V/60Hz

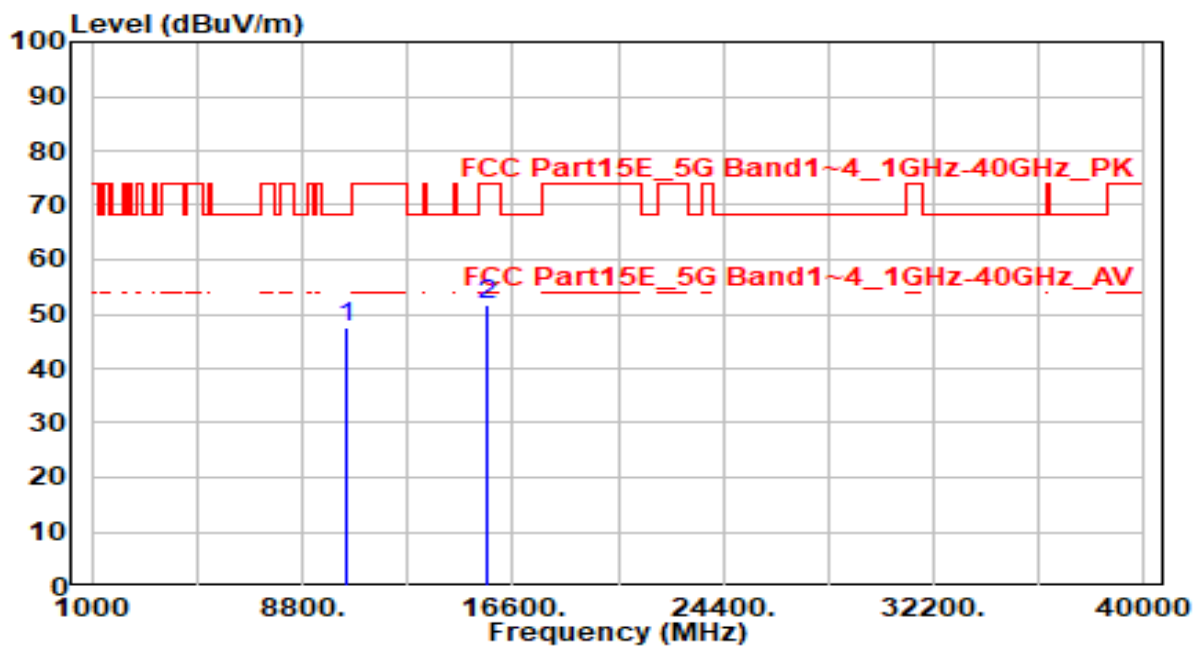


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10460.000	42.19	5.27	47.46	-20.74	68.20	150	360	Peak
2	15690.000	45.23	6.63	51.85	-22.15	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band2_CH 54_ANT 0	Test Voltage	AC 120V/60Hz

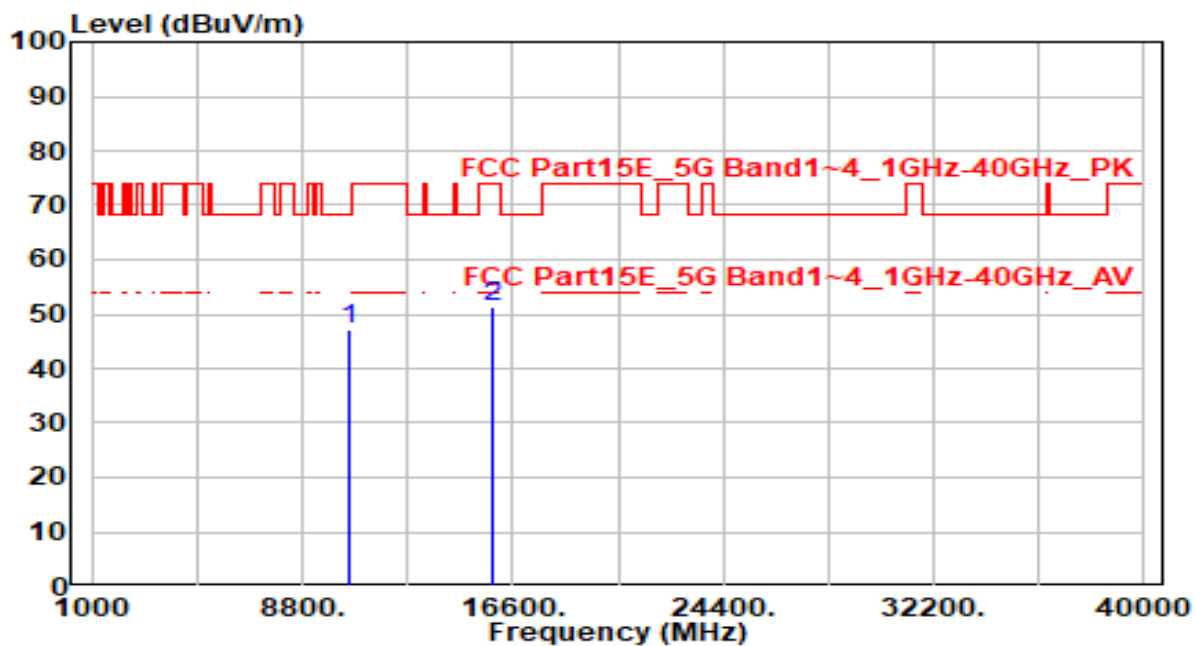


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10540.000	42.07	5.25	47.32	-20.88	68.20	150	360	Peak
2	15810.000	44.30	6.88	51.19	-22.81	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band2_CH 54_ANT 0	Test Voltage	AC 120V/60Hz

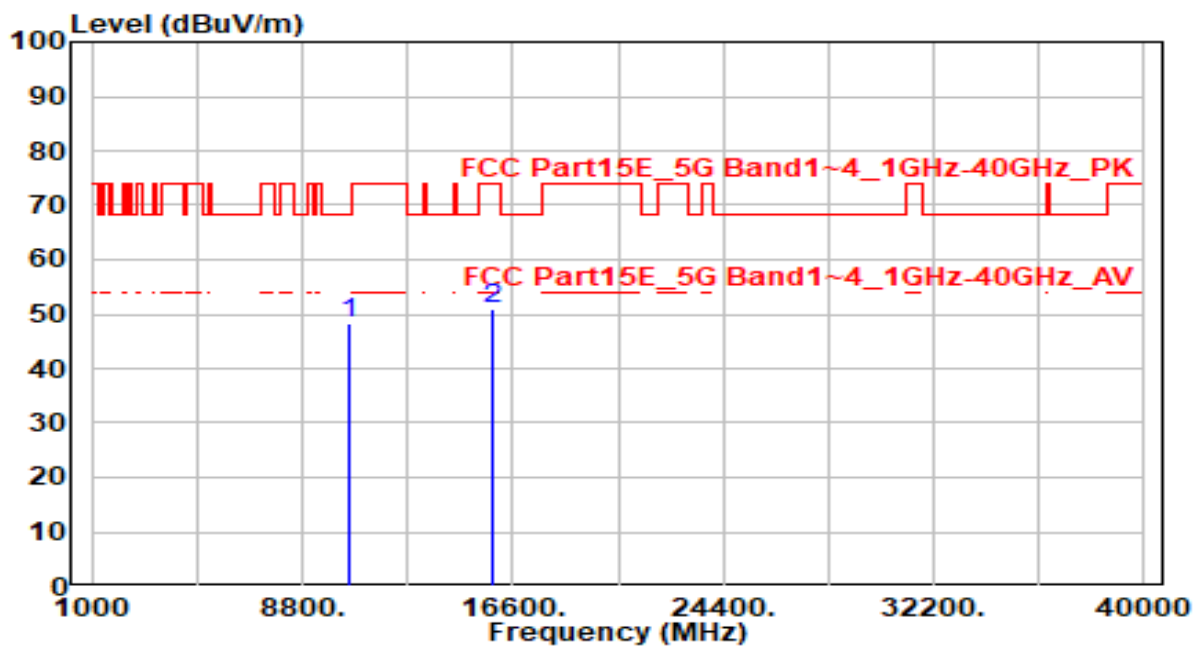


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 10540.000	43.04	5.25	48.29	-19.91	68.20	150	360	Peak
2	15810.000	43.94	6.88	50.82	-23.18	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band2_CH 62_ANT 0	Test Voltage	AC 120V/60Hz

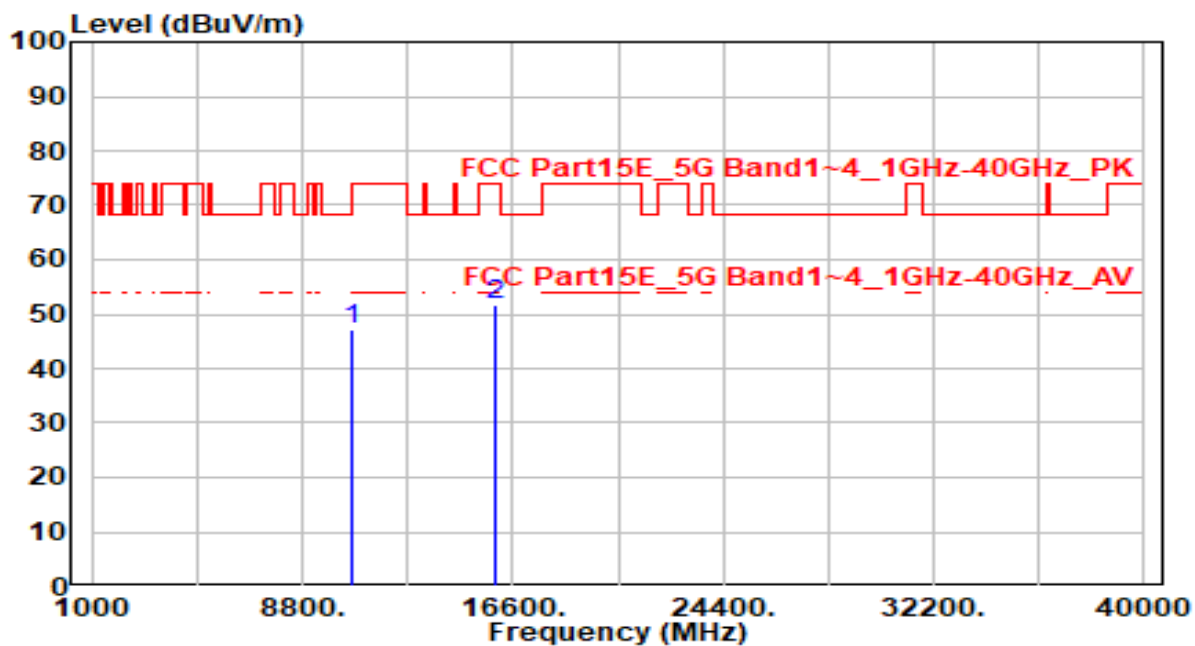


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	41.74	5.26	47.00	-27.00	74.00	150	360	Peak
2	* 15930.000	44.75	6.98	51.73	-22.27	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band2_CH 62_ANT 0	Test Voltage	AC 120V/60Hz

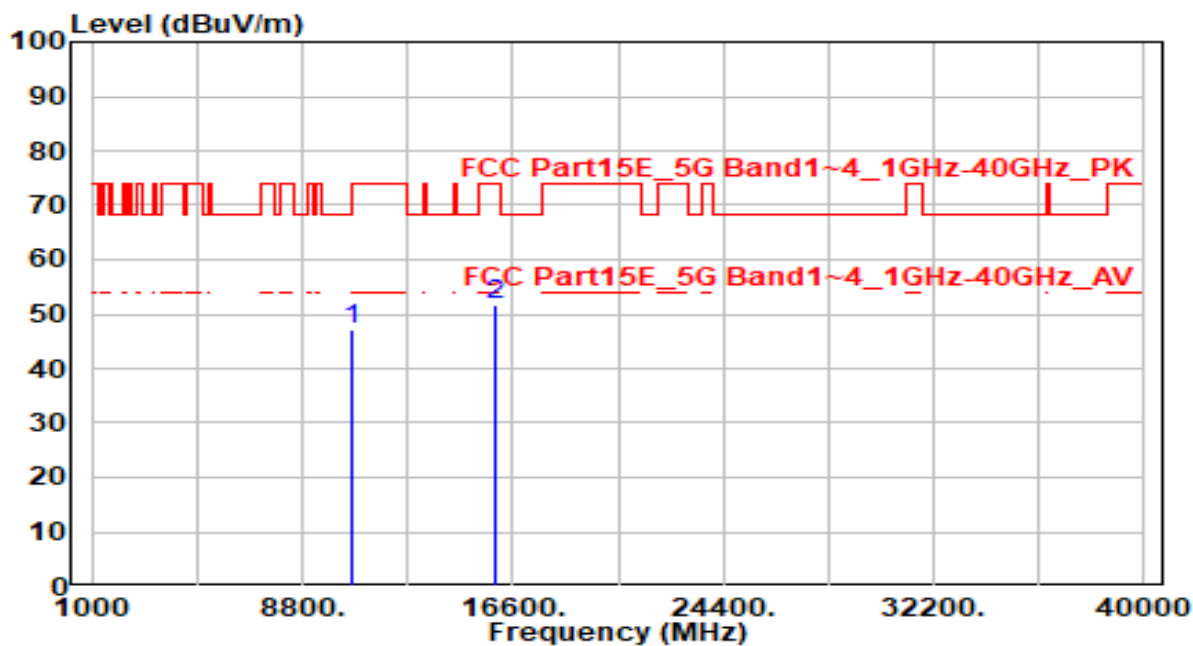


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	41.89	5.26	47.15	-26.85	74.00	150	360	Peak
2	* 15930.000	44.64	6.98	51.62	-22.38	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Rugged Tablet	Date of Test	2022-10-01
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	24°C /61%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11n-40MHz_TX_Band3_CH 102_ANT 0	Test Voltage	AC 120V/60Hz

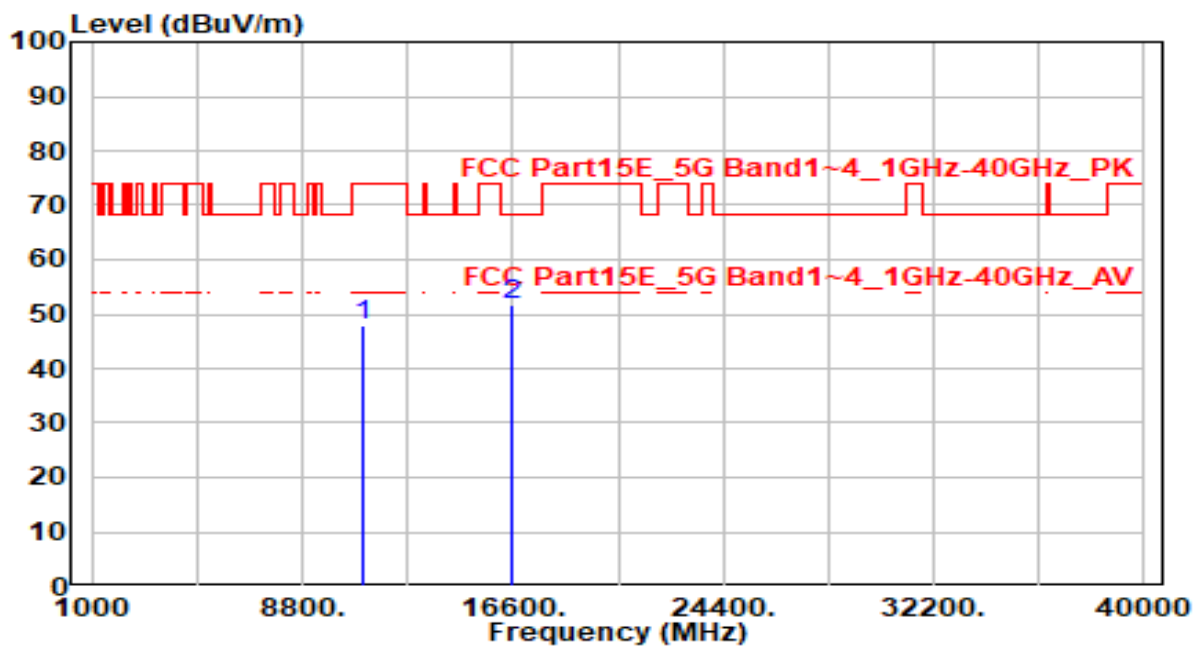

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	42.37	5.58	47.95	-26.05	74.00	150	360	Peak
2	* 16530.000	44.49	7.39	51.88	-16.32	68.20	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.