



中认信通
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: safe360 llc

Address: 8148 lefferts blvd, Kew gardens, New York, United States

FCC ID: 2A8ABMINI2

Product Name: Cellular 4G/LTE alarm panel

Standard(s): 47 CFR Part 2
47 CFR Part 24, Subpart E
47 CFR Part 27
ANSI C63.26-2015

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR230312071-00B

Date Of Issue: 2023/6/28

Reviewed By: Sun Zhong *Sun Zhong*

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
DOCUMENT REVISION HISTORY	4
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 DESCRIPTION OF TEST CONFIGURATION.....	6
1.2.2 Support Equipment List and Details	6
1.2.3 Support Cable List and Details	6
1.2.4 Block Diagram of Test Setup.....	6
1.3 MEASUREMENT UNCERTAINTY	7
2. SUMMARY OF TEST RESULTS	8
3. REQUIREMENTS AND TEST PROCEDURES	9
3.1 Applicable Standard For Part 24 Subpart E:	9
3.1.1 RF Output Power	9
3.1.2 Spurious Emissions.....	9
3.1.3 Frequency stability.....	9
3.2 Applicable Standard For Part 27:.....	10
3.2.1 RF Output Power	10
3.2.2 Spurious Emissions.....	10
3.2.3 Frequency stability.....	12
3.3 Test Method:	13
3.3.1 RF Output Power	13
Test Setup Block:.....	13
3.3.2 Occupied Bandwidth.....	14
Test Setup Block:.....	14
3.3.3 Spurious emissions at antenna terminals.....	15
Test Setup Block:.....	15
3.3.4 Out of band emission	16
Test Setup Block:.....	16
3.3.5 Frequency stability.....	17
Test Setup Block:.....	17
3.3.6 Field strength of spurious radiation.....	18
4. Test DATA AND RESULTS	20
4.1 ANTENNA PORT TEST DATA AND RESULTS FOR BAND 2	20
4.2 ANTENNA PORT TEST DATA AND RESULTS FOR BAND 4	30
4.11 RADIATED SPURIOUS EMISSIONS.....	40
5. RF EXPOSURE EVALUATION	43
5.1 MPE-BASED EXEMPTION.....	43
5.1.1 Applicable Standard.....	43
5.1.2 Measurement Result.....	43

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR230312071-00B	Original Report	2023/6/28

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

General:

EUT Name:	Cellular 4G/LTE alarm panel
EUT Model:	Mini2
Operation Bands and modes:	NB-IoT: Band 2/4
Modulation Type:	BPSK, QPSK
Rated Input Voltage:	DC 3.7V from battery or 100-240V
Serial Number:	235J
EUT Received Date:	2023/3/16
EUT Received Status:	Good

Operation Voltage(V_{DC}) ▲:

Lowest:	3.5	Normal:	3.7	Highest:	4.2
---------	-----	---------	-----	----------	-----

Antenna Information▲:

Antenna Manufacturer	Antenna Type	Operation Bands	Antenna Frequency Range (MHz)	Antenna Gain (Gr) (dBi)	L _c (dB)
Jinjiang Rixing Hardware Processing Factory	PIFA	LTE B2	1850-1910	5	0
		LTE B4	1710-1755	5	0

Note: L_c= Signal Attenuation in the connecting cable between the transmitter and antenna, in dB.

Accessory Information:

Accessory Description	Manufacturer	Model
Adapter	Unknown	MF-05001000

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in each operation mode.
Equipment Modifications:	No
EUT Exercise Software:	No
The maximum power was configured per 3GPP Standard for each operation modes.	

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
R&S	Functional radio communication tester	CMW290	101742

1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
/	/	/	/	/	/

1.2.4 Block Diagram of Test Setup

Radiation Test:

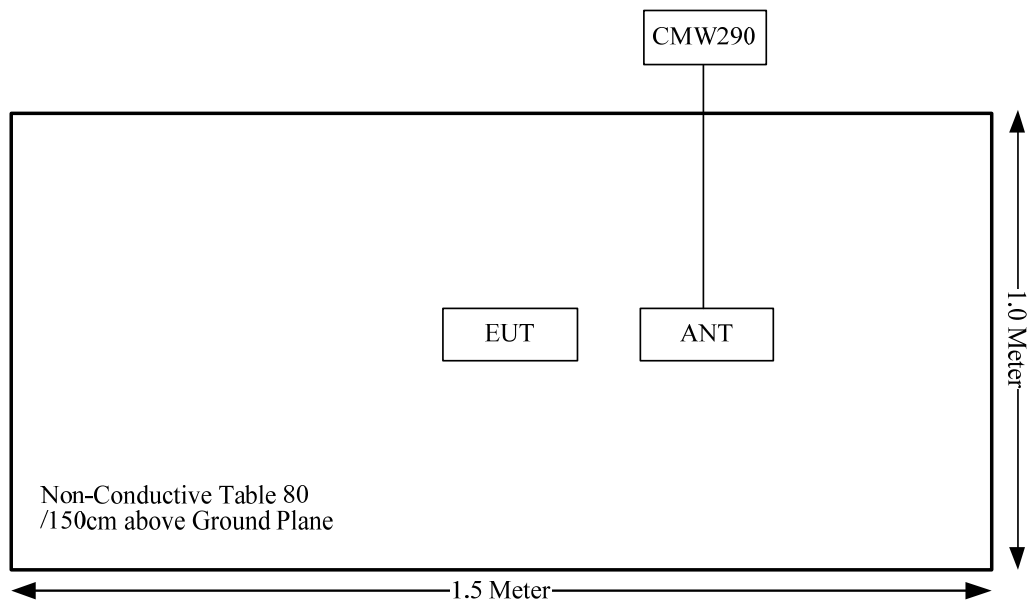

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
RF Frequency	±0.082×10 ⁻⁶

2. SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC§2.1046; § 24.232; §27.50	RF Output Power	Compliant
FCC§ 2.1047	Modulation Characteristics	Not Applicable
FCC§ 2.1049; § 24.238; §27.53	Occupied Bandwidth	Compliant
FCC§ 2.1051; § 24.238; §27.53	Spurious Emissions at Antenna Terminal	Compliant
FCC§ 24.238; §27.53	Out of band emission, Band Edge	Compliant
FCC§ 2.1055 § 24.235; §27.54	Frequency stability vs. temperature Frequency stability vs. voltage	Compliant
FCC§ 2.1053 § 24.238; §27.53	Field Strength of Spurious Radiation	Compliant
§1.1307 & §2.1091	RF Exposure Evaluation	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 Applicable Standard For Part 24 Subpart E:

3.1.1 RF Output Power

FCC §24.232

(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

(d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.1.2 Spurious Emissions

FCC §24.238

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Alternative out of band emission limit. Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.

(d) Interference caused by out of band emissions. If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

3.1.3 Frequency stability

FCC §24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.2 Applicable Standard For Part 27:

3.2.1 RF Output Power

FCC §27.50

(a)(3) *Mobile and portable stations.*

(i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, *except that* for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

(ii) Mobile and portable stations are not permitted to transmit in the 2315-2320 MHz and 2345-2350 MHz bands.

(iii) *Automatic transmit power control.* Mobile and portable stations transmitting in the 2305-2315 MHz band or in the 2350-2360 MHz band must employ automatic transmit power control when operating so the stations operate with the minimum power necessary for successful communications.

(iv) *Prohibition on external vehicle-mounted antennas.* The use of external vehicle-mounted antennas for mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band is prohibited.

(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c)(10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d)(4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(h) The following power limits shall apply in the BRS and EBS:

(2) Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

3.2.2 Spurious Emissions

FCC §27.53

(a) For operations in the 2305-2320 MHz band and the 2345-2360 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power P (with averaging performed only during periods of transmission) within the licensed band(s) of operation, in watts, by the following amounts:

(4) For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

(i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz;

(ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz;

(iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to - 70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and - 80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

(h) AWS emission limits

(1) **General protection levels.** Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.2.3 Frequency stability

FCC §27.54

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

3.3 Test Method:

3.3.1 RF Output Power

According to CFR Part 2.1046, ANSI C63.26-2015 Section 5.2.5.5:

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

where:


ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively
(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

Test Setup Block:

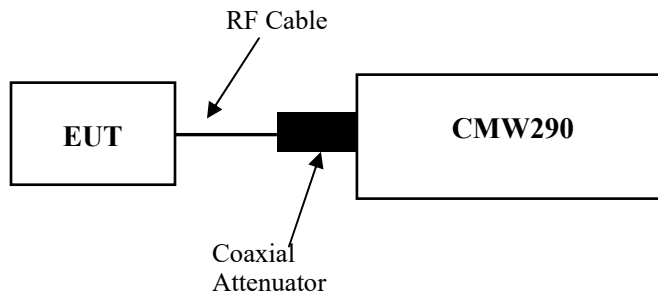

Note: The Insertion loss of the RF cable and coaxial Attenuator was offset into the Reading of CMW500.

3.3.2 Occupied Bandwidth

According to CFR Part 2.1049, ANSI C63.26-2015 Section 5.4.4

The OBW is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring (99%) power bandwidth:

a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of $1.5 \times \text{OBW}$ is sufficient).

b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times \text{RBW}$.


c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
NOTE—Step a), step b), and step c) may require iteration to adjust within the specified tolerances.

d) Set the detection mode to peak, and the trace mode to max-hold.

e) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.

f) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

Test Setup Block:

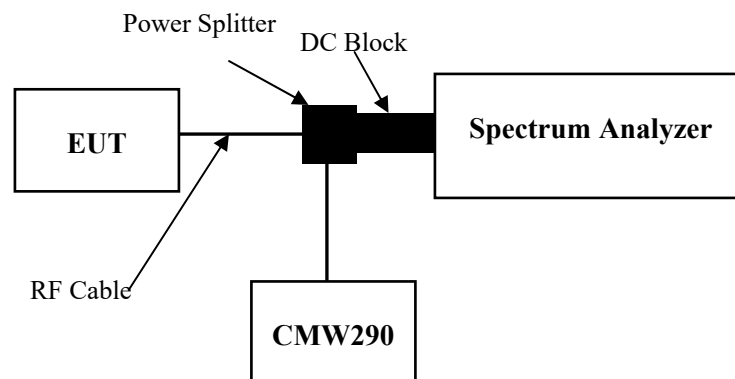


3.3.3 Spurious emissions at antenna terminals

According to ANSI C63.26-2015 Section 5.7.4:

the applicable rule part specifies the reference bandwidth for measuring unwanted emission levels (typically, 100 kHz if the authorized frequency band/block is at or below 1 GHz and 1 MHz if the authorized frequency band/block is above 1 GHz),8 effectively depicting the unwanted emission limit in terms of a power spectral density. In those cases where no reference bandwidth is explicitly specified, the values in the preceding sentence should be used.

Test Setup Block:

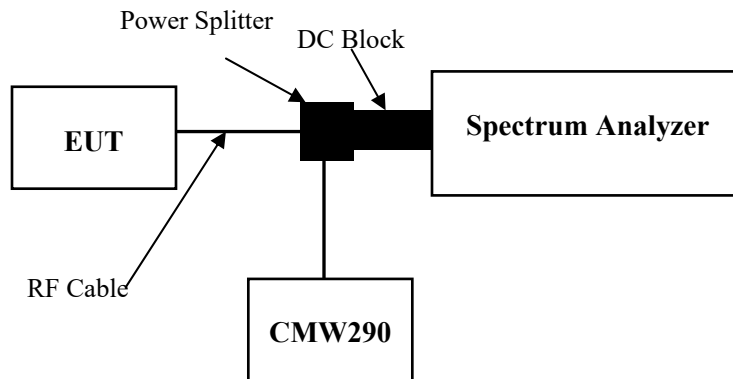


3.3.4 Out of band emission

According to ANSI C63.26-2015 Section 5.7.3:

Typically, a measurement (resolution) bandwidth smaller than the reference bandwidth is allowed for measurements within a specified frequency range at the edge of the authorized frequency block/band (e.g., within the first Y MHz outside of the authorized frequency band/block, where the value of Y is specified in the relevant rule part). Some FCC out-of-band emission rules permit the use of a narrower RBW (typically limited to a minimum RBW of 1 % of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth. Beyond the specified frequency range in which this relaxation of the uniform reference bandwidth is permitted, it typically is also acceptable to use a narrower RBW (again limited to a minimum of 1 % of OBW) to increase accuracy, but the measurement result must subsequently be integrated over the full reference bandwidth.

Test Setup Block:

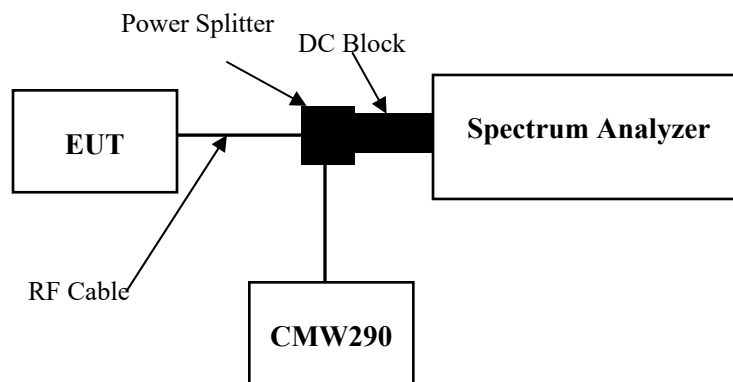

3.3.5 Frequency stability

According to ANSI C63.26-2015 Section 5.6:

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage.


The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency determining circuit element shall be made subsequent to this initial set-up. Frequency stability is tested:

- a) At 10 °C intervals of temperatures between –30 °C and +50 °C at the manufacturer's rated supply voltage, and
- b) At +20 °C temperature and ±15% supply voltage variations. If a product is specified to operate over a range of input voltage then the –15% variation is applied to the lowermost voltage and the +15% is applied to the uppermost voltage.

During the test all necessary settings, adjustments and control of the EUT have to be performed without disturbing the test environment, i.e., without opening the environmental chamber. The frequency stabilities can be maintained to a lesser temperature range provided that the transmitter is automatically inhibited from operating outside the lesser temperature range. For handheld equipment that is only capable of operating from internal batteries and the supply voltage cannot be varied, the frequency stability tests shall be performed at the nominal battery voltage and the battery end point voltage specified by the manufacturer. An external supply voltage can be used and set at the internal battery nominal voltage, and again at the battery operating end point voltage which shall be specified by the equipment manufacturer.

If an unmodulated carrier is not available, the mean frequency of a modulated carrier can be obtained by using a frequency counter with gating time set to an appropriately large multiple of bit periods (gating time depending on the required accuracy). Full details on the choice of values shall be included in the test report.

Test Setup Block:

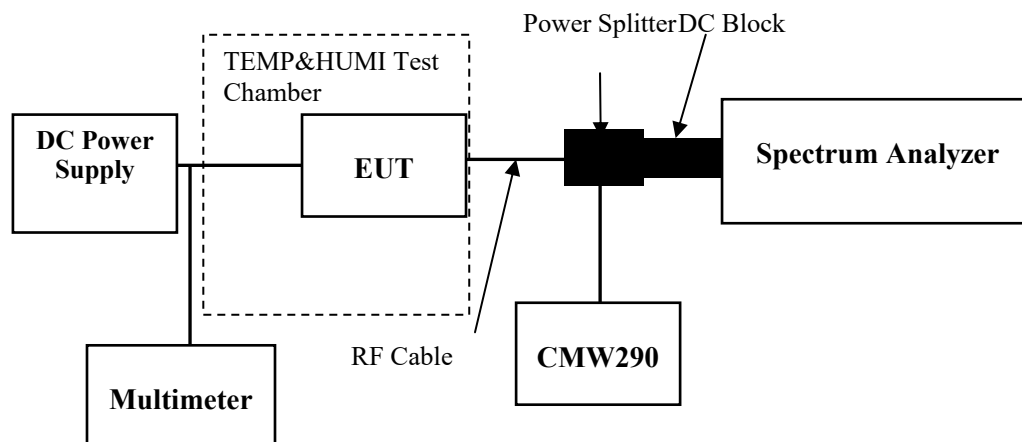

3.3.6 Field strength of spurious radiation

According to ANSI C63.26-2015 Section 5.5.3:

Test setup:

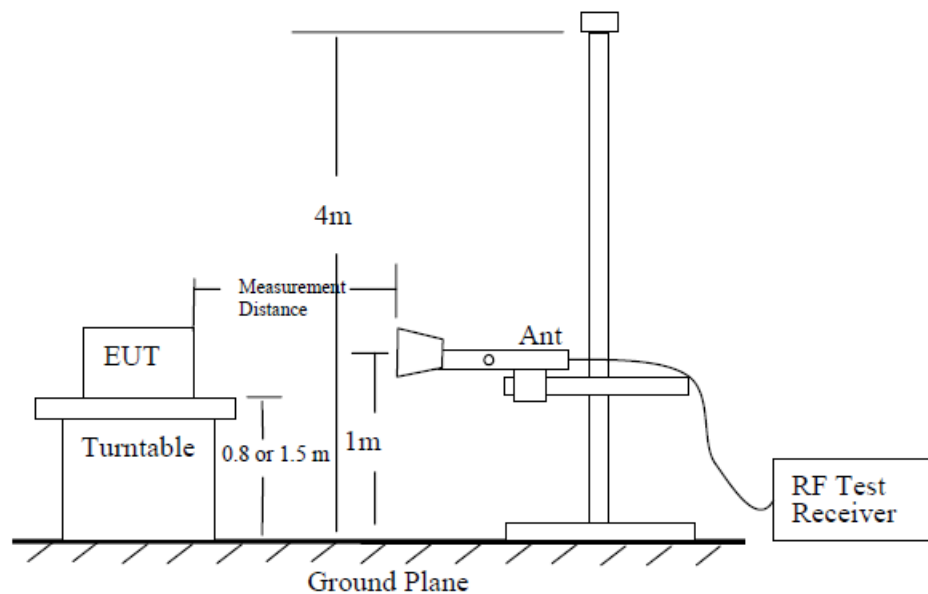


Figure 6—Test site-up for radiated ERP and/or EIRP measurements

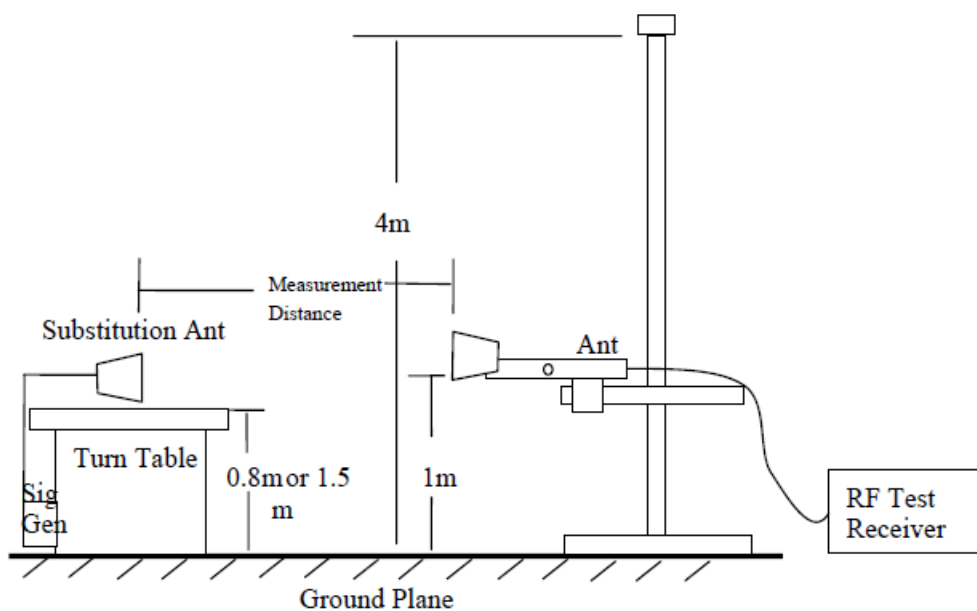


Figure 7—Substitution method set-up for radiated emission

Test Procedure:

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
 - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- d) Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
- e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
 - 1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - 2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
 - 3) Record the output power level of the signal generator when equivalence is achieved in step 2).
- h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- i) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
 where

$$P_e = \text{equivalent emission power in dBm}$$

$$P_s = \text{source (signal generator) power in dBm}$$
 NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
- j) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from: $\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}$. If necessary, the antenna gain can be calculated from calibrated antenna factor information
- k) Provide the complete measurement results as a part of the test report.

4. Test DATA AND RESULTS

4.1 Antenna Port Test Data and Results for Band 2

Serial Number:	235J	Test Date:	2023-06-27~2023-06-28
Test Site:	RF	Test Mode:	Transmitting
Tester:	George Chen	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.9~26.3	Relative Humidity: (%)	44~58	ATM Pressure: (kPa)	100.8~102.1
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2022/07/15	2023/07/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
Weinschel	Power Splitter	1515	RA914	Each time	N/A
R&S	Functional radio communication tester	CMW290	101742	2023/6/8	2024/6/7
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2022/09/29	2023/09/28
UNI-T	Multimeter	UT39A+	C210582554	2022/07/15	2023/07/14
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency For Each Mode:

Modulation	Sub-carrier Spacing (kHz)	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
BPSK	3.75	1850.1	1880	1909.9
BPSK	15	1850.1	1880	1909.9
QPSK	3.75	1850.1	1880	1909.9
QPSK	15	1850.1	1880	1909.9

Test Data:**FCC§2.1046;§ 24.232****RF Output Power:**

Modulation	Sub-carrier Spacing (kHz)	Resource Block & RB offset	Maximum Conducted Output Power (dBm)			EIRP (dBm)	EIRP Limit (dBm)
			Lowest Channel	Middle Channel	Highest Channel		
BPSK	3.75	RB1#0	18.35	18.63	18.77	23.77	33
		RB1#47	18.15	18.43	18.31	23.43	33
	15	RB1#0	18.04	18.36	18.17	23.36	33
		RB1#11	17.94	18.21	18.32	23.32	33
QPSK	3.75	RB1#0	18.59	18.71	18.98	23.98	33
		RB1#47	18.58	18.73	18.75	23.75	33
	15	RB1#0	18.55	18.89	18.64	23.89	33
		RB1#11	18.48	18.79	18.93	23.93	33
		RB12#0	18.45	18.54	18.93	23.93	33

Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi)

Result:**Pass****Peak-to-average Ratio(PAR)**

Modulation	Sub-carrier Spacing (kHz)	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
			Lowest Channel	Middle Channel	Highest Channel	
BPSK	3.75	RB1#0	2.45	2.06	2.43	13
	15	RB1#11	2.55	2.38	2.65	13
QPSK	3.75	RB1#0	2.23	2.52	2.44	13
	15	RB1#0	2.23	2.15	2.65	13
		RB12#0	2.45	2.06	2.43	13
					Result:	Pass

FCC §2.1049, §24.238:Occupied Bandwidth

Modulation	Sub-carrier Spacing (kHz)	Resource Block & RB offset	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
			Lowest Channel	Middle Channel	Highest Channel	Lowest Channel	Middle Channel	Highest Channel
BPSK	3.75	RB1#0	0.062	0.062	0.061	0.045	0.045	0.045
	15	RB1#0	0.124	0.124	0.127	0.109	0.109	0.109
QPSK	3.75	RB1#0	0.069	0.069	0.069	0.045	0.046	0.048
	15	RB1#0	0.122	0.120	0.120	0.120	0.119	0.119
		RB12#0	0.185	0.185	0.185	0.250	0.252	0.250

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, § 24.238 (a):Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--

FCC §2.1051, § 24.238 (a):Out of band emission, Band Edge

Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---

FCC §2.1055, §24.235: Frequency Stability

Test Mode:	BPSK 15kHz RB1#0	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.7	1850.099	1850.000	1909.989	1910.000
	-20	3.7	1850.050	1850.000	1909.932	1910.000
	-10	3.7	1850.146	1850.000	1909.916	1910.000
	0	3.7	1850.051	1850.000	1909.960	1910.000
	10	3.7	1850.104	1850.000	1909.914	1910.000
	20	3.7	1850.113	1850.000	1909.913	1910.000
	30	3.7	1850.070	1850.000	1909.968	1910.000
	40	3.7	1850.115	1850.000	1909.903	1910.000
	50	3.7	1850.054	1850.000	1909.983	1910.000
Frequency Stability vs. Voltage	20	3.5	1850.102	1850.000	1909.904	1910.000
	20	4.2	1850.096	1850.000	1909.995	1910.000
Result:					Pass	

Test Mode:	QPSK 15kHz RB12#0	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.7	1850.094	1850.000	1909.988	1910.000
	-20	3.7	1850.078	1850.000	1909.935	1910.000
	-10	3.7	1850.076	1850.000	1909.926	1910.000
	0	3.7	1850.081	1850.000	1909.968	1910.000
	10	3.7	1850.077	1850.000	1909.941	1910.000
	20	3.7	1850.071	1850.000	1909.926	1910.000
	30	3.7	1850.072	1850.000	1909.955	1910.000
	40	3.7	1850.088	1850.000	1909.953	1910.000
	50	3.7	1850.059	1850.000	1909.987	1910.000
Frequency Stability vs. Voltage	20	3.5	1850.098	1850.000	1909.954	1910.000
	20	4.2	1850.097	1850.000	1909.988	1910.000
Result:					Pass	

Test Plots(Note: The 6.0dB is the Insertion loss of the RF cable, Power Splitter and DC Block, which was offset into the Spectrum Analyzer):



Occupied Bandwidth

Channel



BPSK 3.75 kHz RB1#0

BPSK 15 kHz RB1#0



Lowest

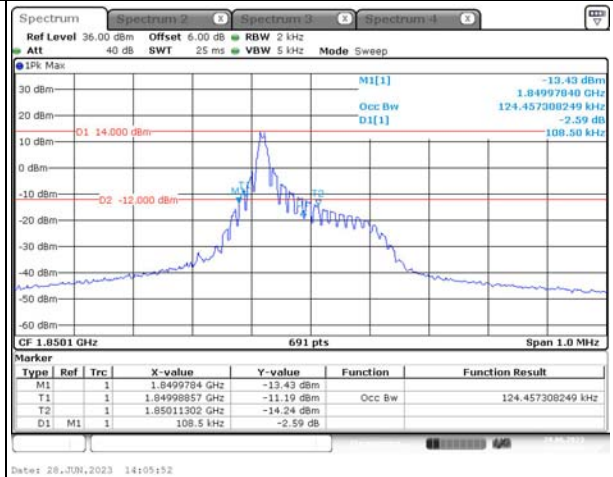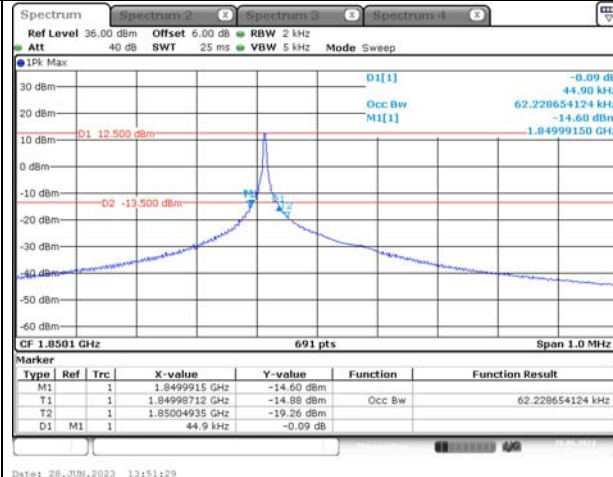

Middle

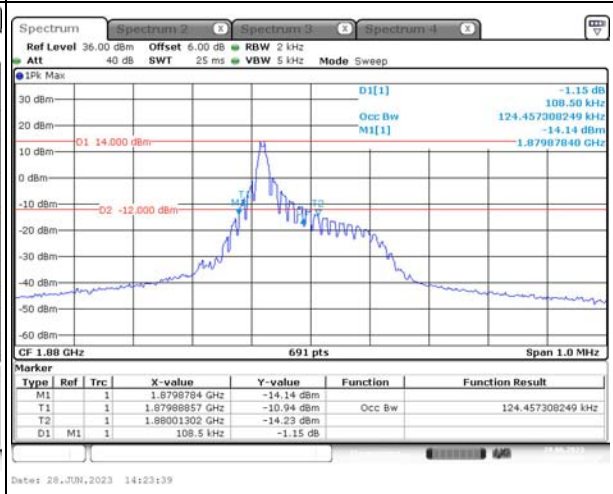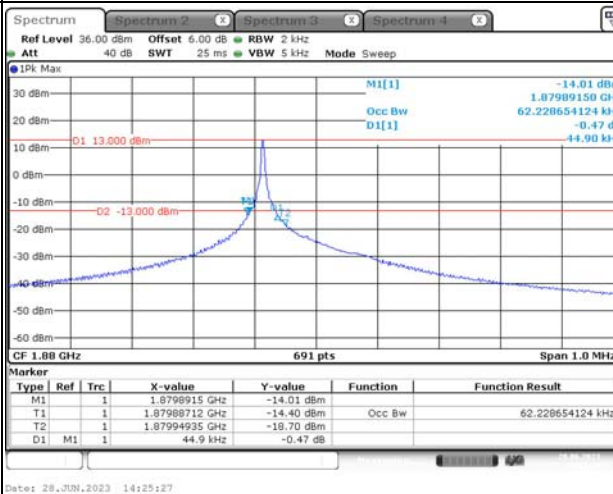

Highest

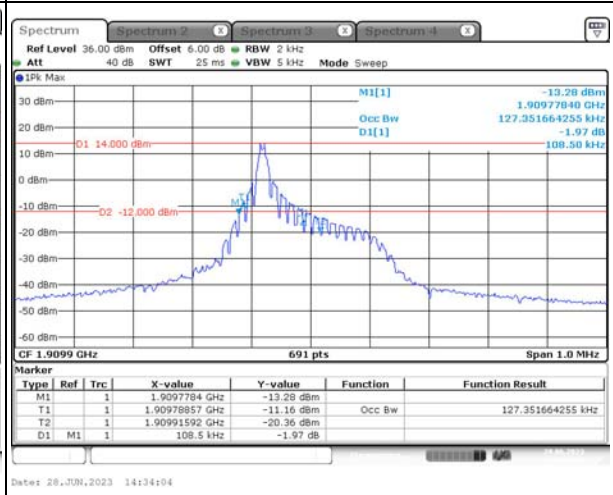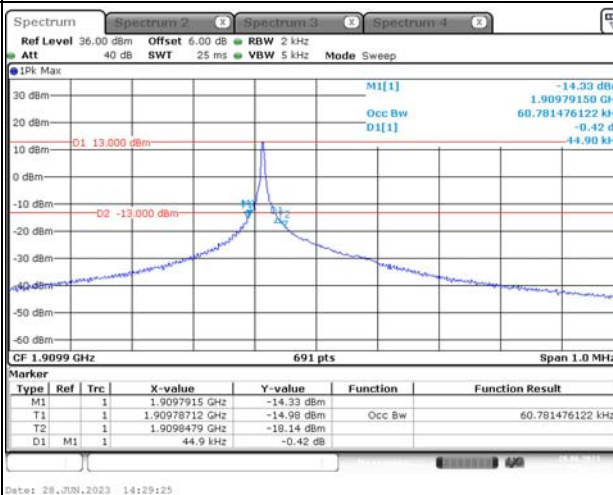



Occupied Bandwidth

Channel



QPSK 3.75 kHz RB1#0

QPSK 15 kHz RB1#0



Lowest

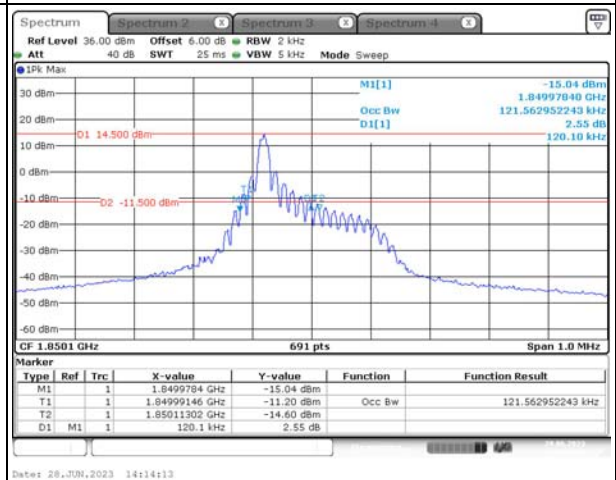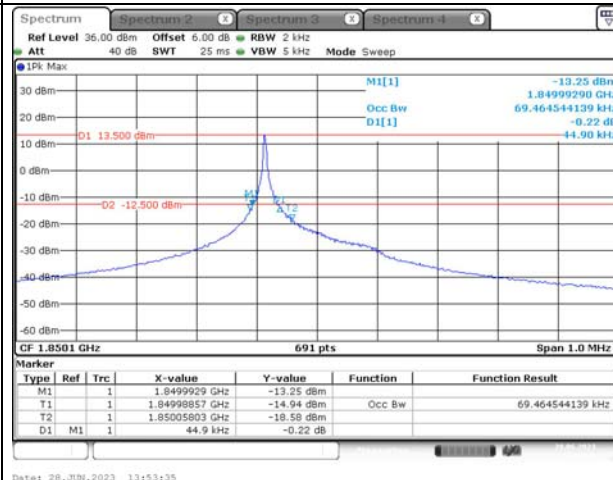

Middle

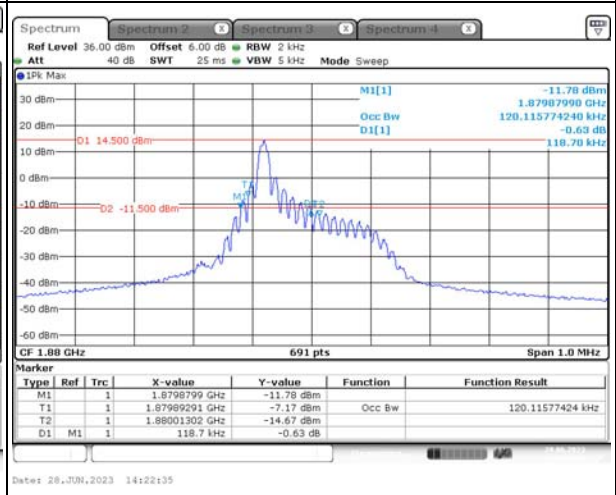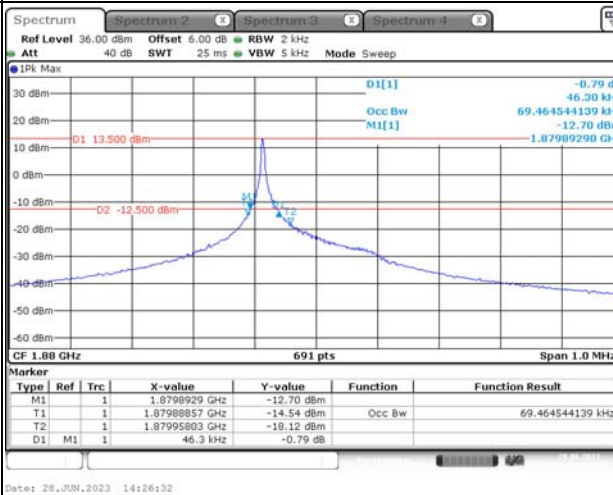

Highest

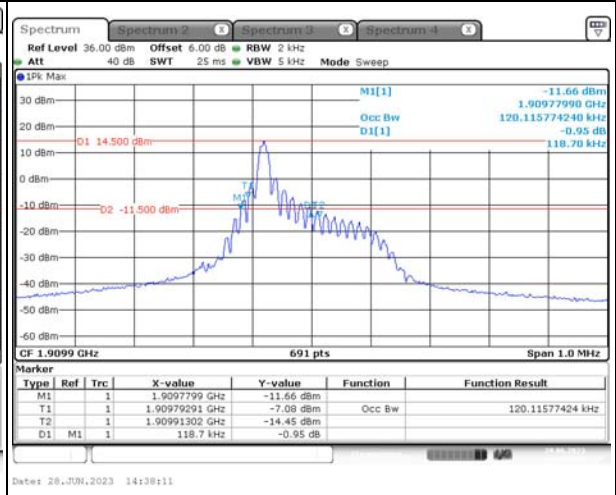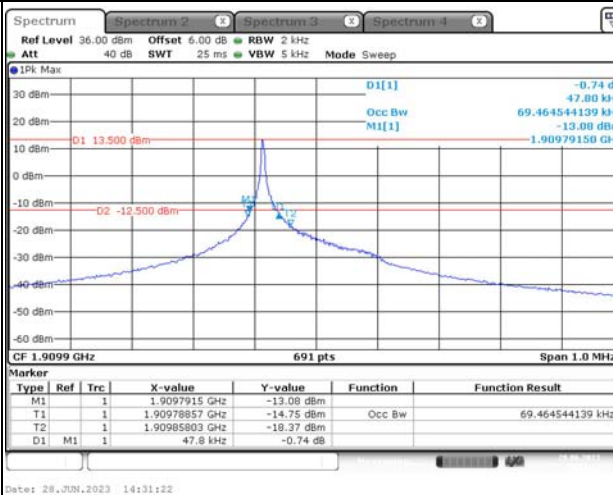


Occupied Bandwidth


Channel

QPSK 15 kHz RB12#0


Lowest

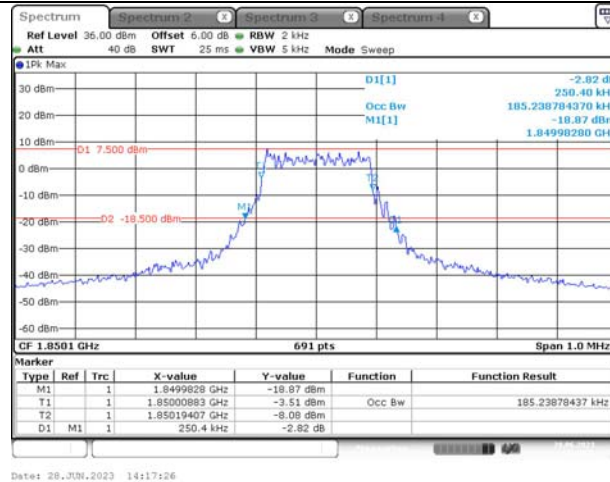

Middle

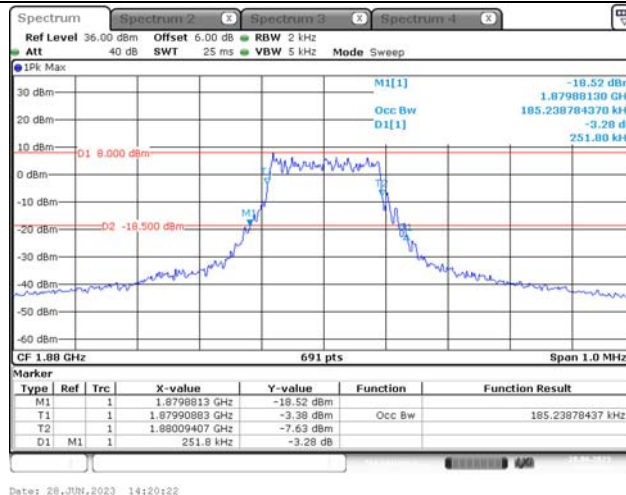

Highest


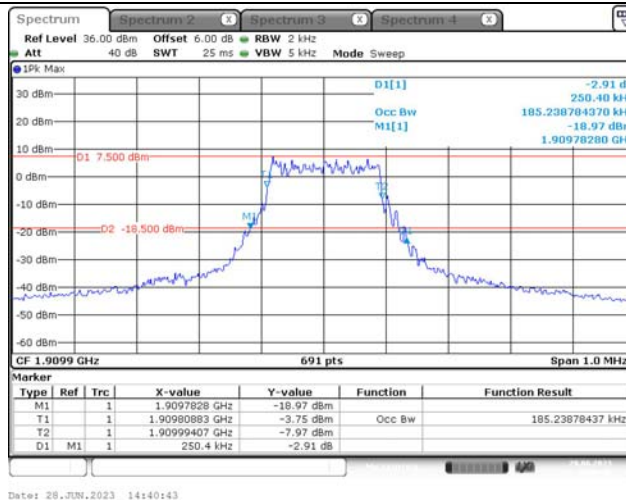


Spurious Emissions at Antenna Terminal



Channel

(Worst: BPSK 3.75K 1#0 was tested)



Lowest

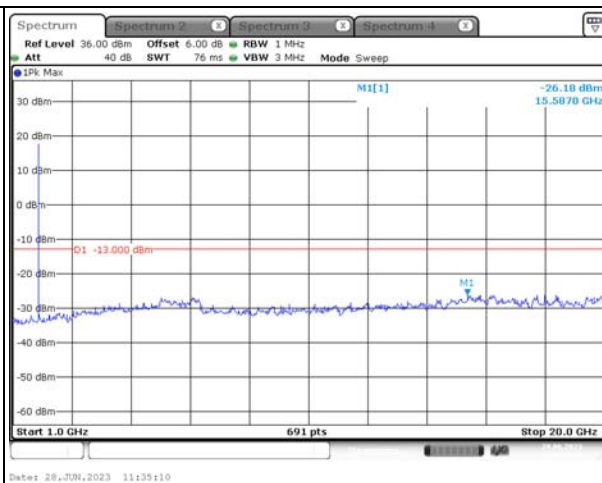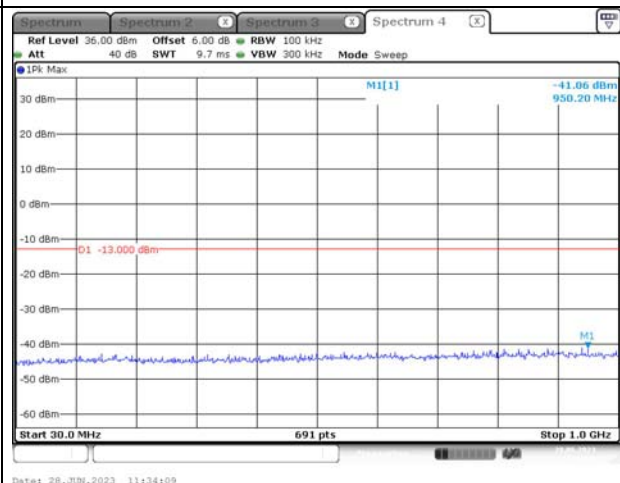


Middle

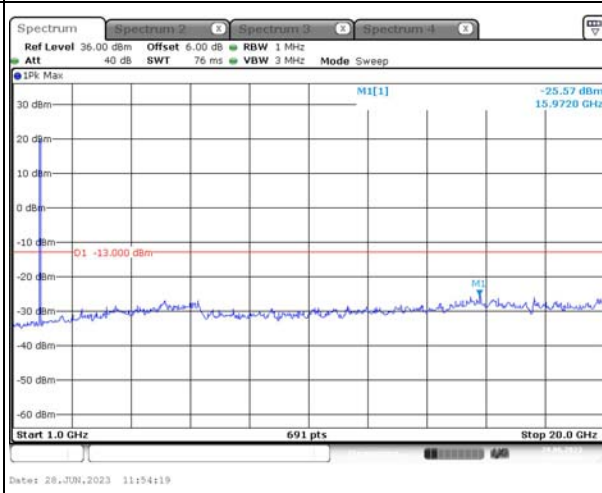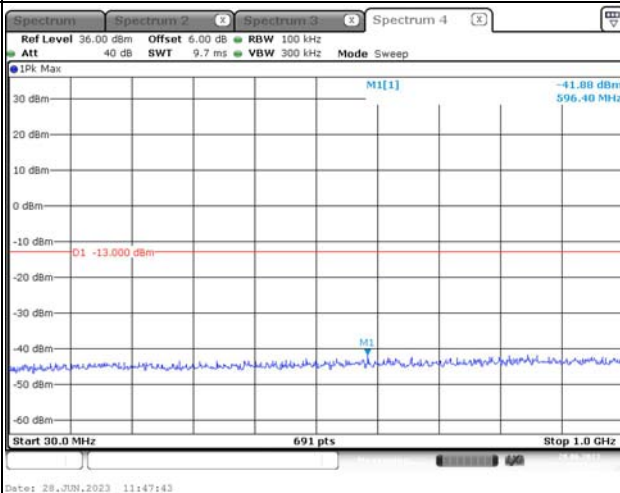


Highest

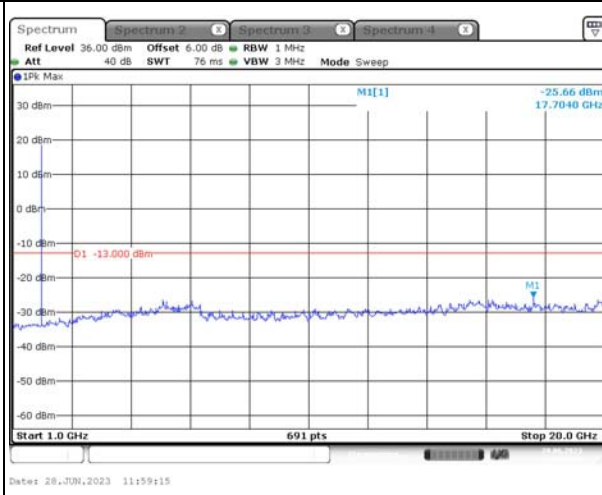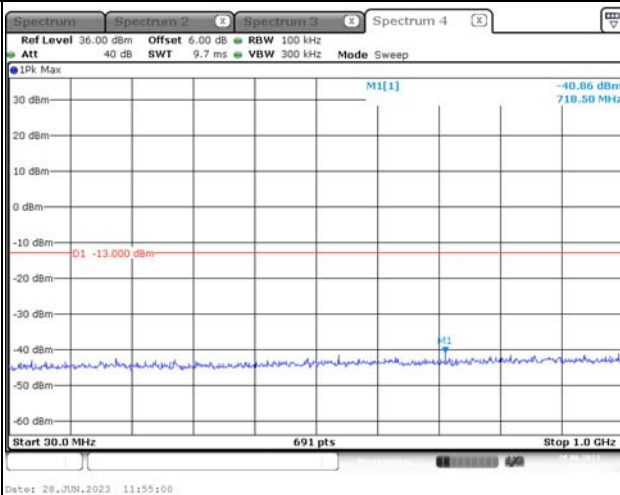


Out of band emission, Band Edge

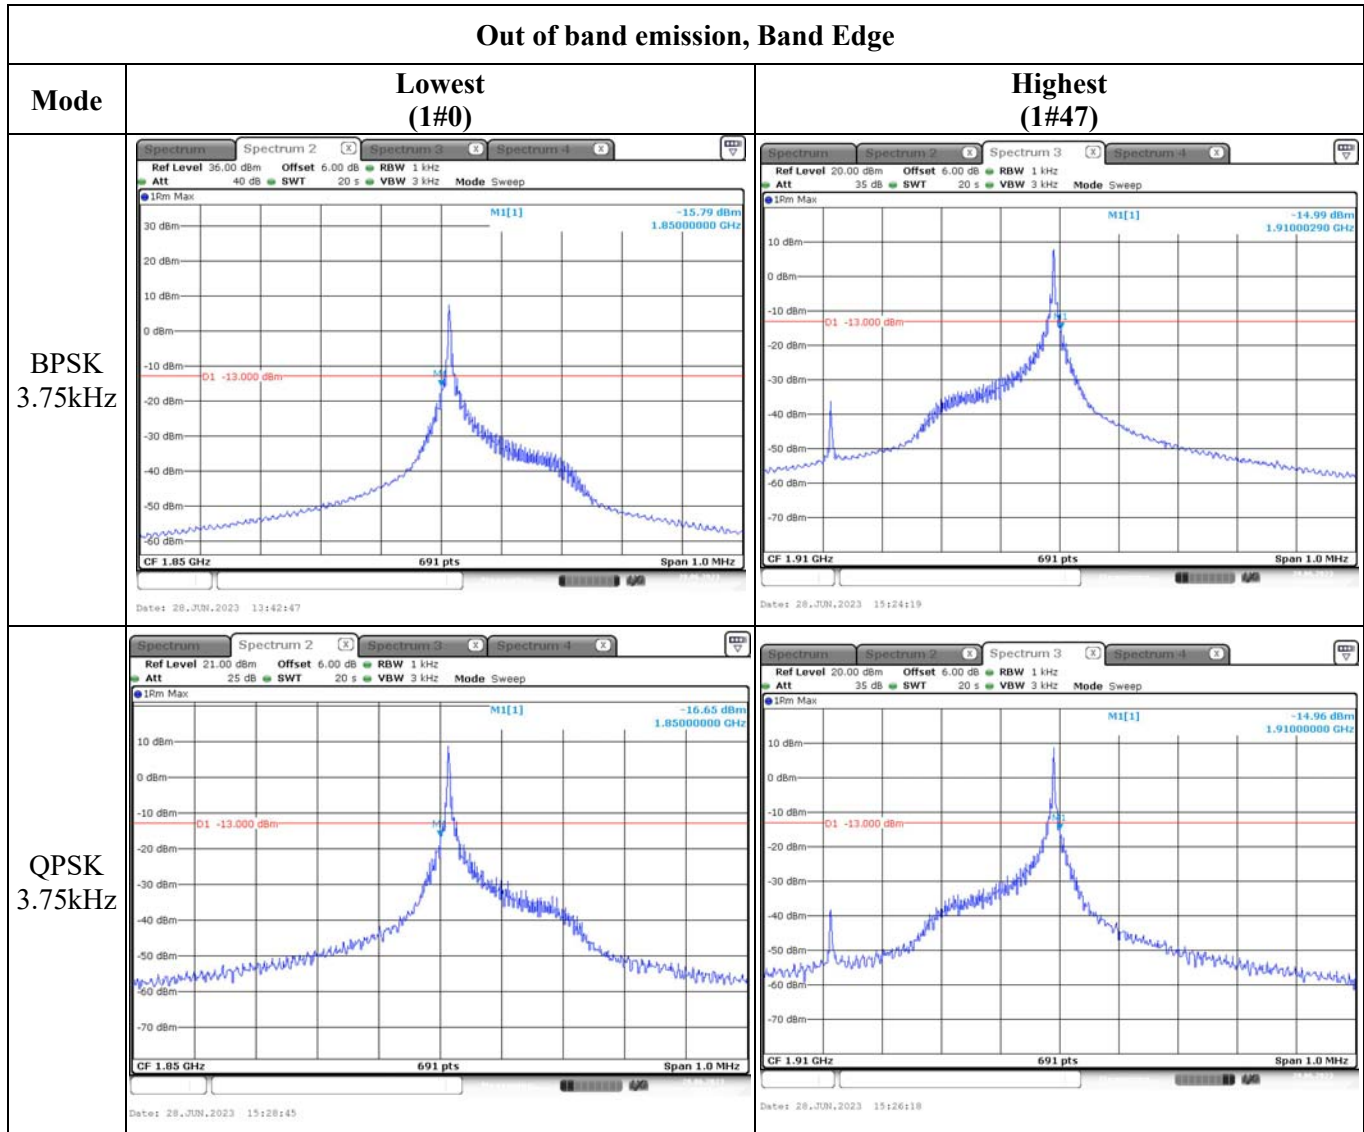

Out of band emission, Band Edge

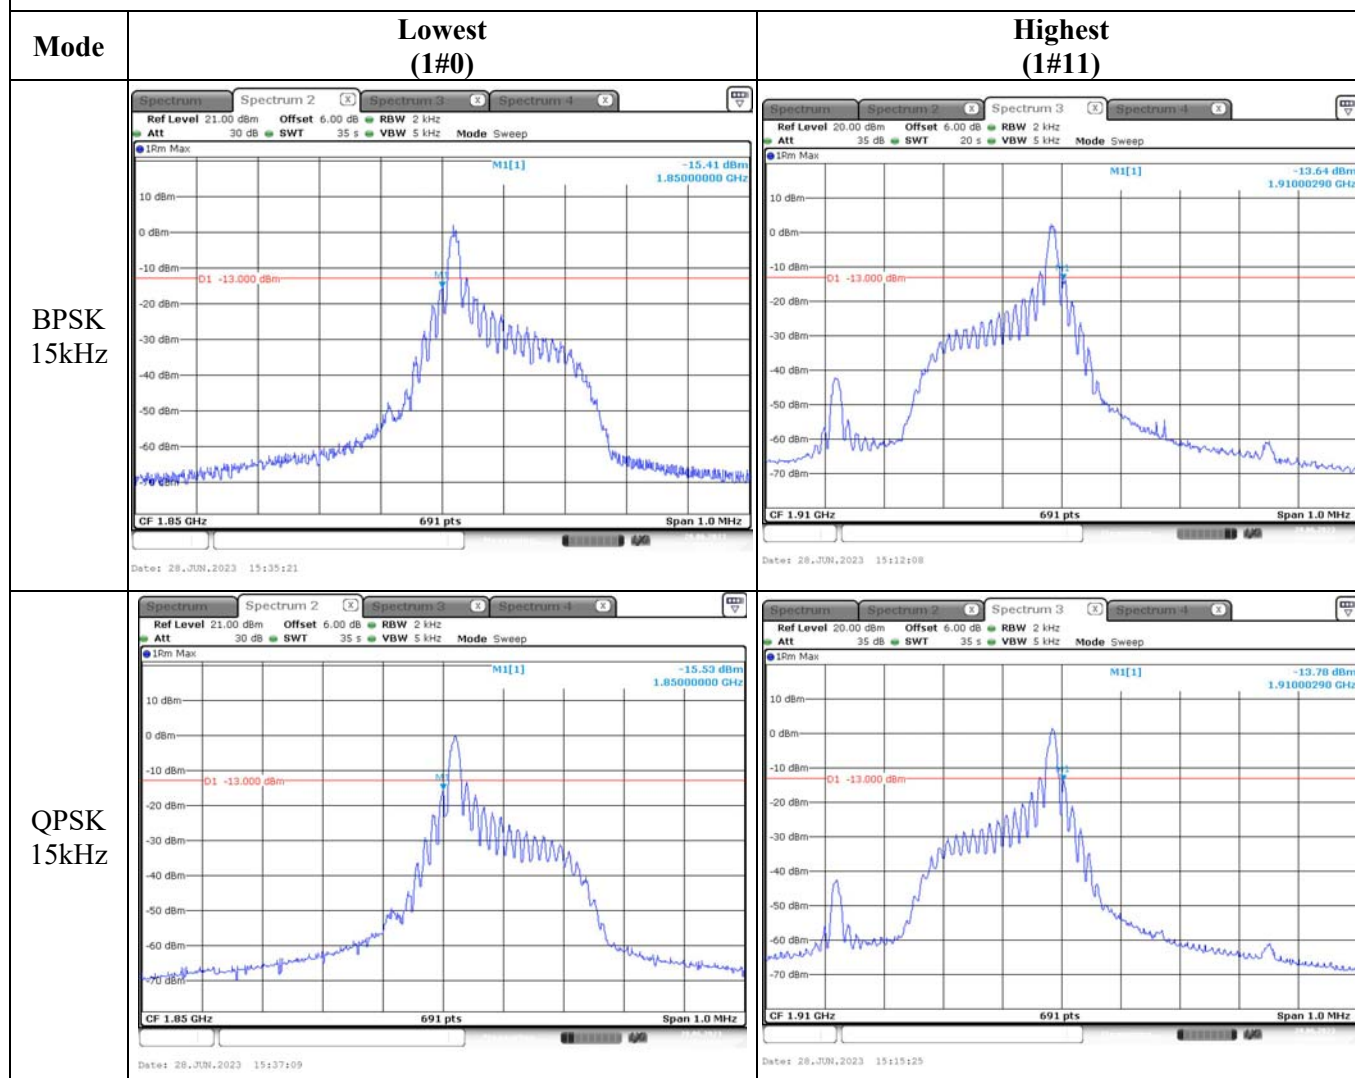

Out of band emission, Band Edge

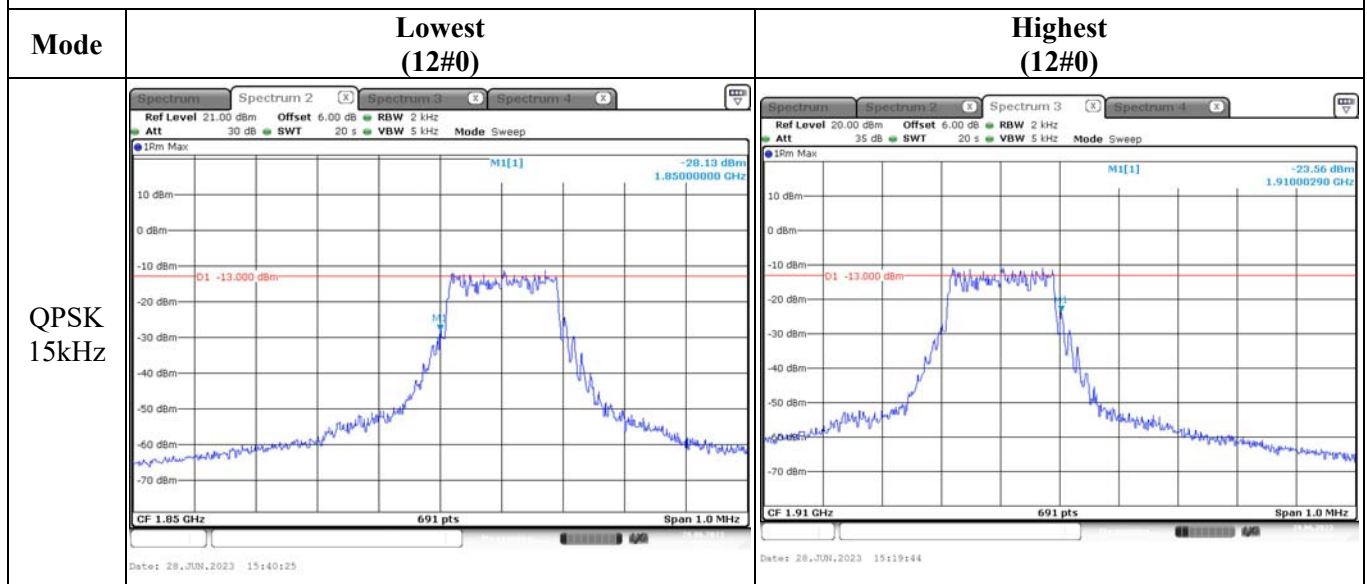

4.2 Antenna Port Test Data and Results for Band 4

Serial Number:	235J	Test Date:	2023-06-27~2023-06-28
Test Site:	RF	Test Mode:	Transmitting
Tester:	George Chen	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.9	Relative Humidity: (%)	44	ATM Pressure: (kPa)	100.8
-------------------	------	------------------------	----	---------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2022/7/15	2023/7/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
Weinschel	Power Splitter	1515	RA914	Each time	N/A
R&S	Functional radio communication tester	CMW290	101742	2023/6/8	2024/6/7
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2022/9/29	2023/9/28
UNI-T	Multimeter	UT39A+	C210582554	2022/7/15	2023/7/14
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency For Each Mode:

Modulation	Sub-carrier Spacing (kHz)	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
BPSK	3.75	1710.1	1732.5	1754.9
BPSK	15	1710.1	1732.5	1754.9
QPSK	3.75	1710.1	1732.5	1754.9
QPSK	15	1710.1	1732.5	1754.9

Test Data:**FCC§2.1046;§ 27.50****RF Output Power:**

Modulation	Sub-carrier Spacing (kHz)	Resource Block & RB offset	Maximum Conducted Output Power (dBm)			EIRP (dBm)	EIRP Limit (dBm)
			Lowest Channel	Middle Channel	Highest Channel		
BPSK	3.75	RB1#0	18.51	18.69	18.61	23.69	30
		RB1#47	18.38	18.54	18.5	23.54	30
	15	RB1#0	18.35	18.69	18.84	23.84	30
		RB1#11	18.17	18.33	18.32	23.33	30
QPSK	3.75	RB1#0	18.46	18.47	18.59	23.59	30
		RB1#47	18.29	18.61	18.65	23.65	30
	15	RB1#0	18.15	18.43	18.45	23.45	30
		RB1#11	17.97	17.95	17.99	22.99	30
		RB12#0	17.93	18.47	18.46	23.47	30

Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi)

Result:**Pass****Peak-to-average Ratio(PAR)**

Modulation	Sub-carrier Spacing (kHz)	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
			Lowest Channel	Middle Channel	Highest Channel	
BPSK	3.75	RB1#0	2.36	2.02	2.66	13
	15	RB1#11	2.47	1.96	2.03	13
QPSK	3.75	RB1#0	2.33	2.53	2.04	13
	15	RB1#0	2.61	2.41	2.06	13
		RB12#0	2.54	2.09	2.41	13
					Result:	Pass

FCC §2.1049, §27.53:Occupied Bandwidth

Modulation	Sub-carrier Spacing (kHz)	Resource Block & RB offset	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
			Lowest Channel	Middle Channel	Highest Channel	Lowest Channel	Middle Channel	Highest Channel
BPSK	3.75	RB1#0	0.059	0.061	0.061	0.045	0.045	0.043
	15	RB1#0	0.124	0.124	0.124	0.109	0.107	0.109
QPSK	3.75	RB1#0	0.069	0.069	0.068	0.045	0.048	0.046
	15	RB1#0	0.120	0.122	0.120	0.119	0.133	0.120
		RB12#0	0.185	0.185	0.185	0.249	0.250	0.250

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, § 27.53:Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--

FCC §2.1051, § 27.53:Out of band emission, Band Edge

Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---


FCC §2.1055, §24.235: Frequency Stability

Test Mode:	BPSK 15kHz RB1#0	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.7	1710.144	1710.00	1754.921	1755
	-20	3.7	1710.114	1710.00	1754.939	1755
	-10	3.7	1710.125	1710.00	1754.959	1755
	0	3.7	1710.107	1710.00	1754.893	1755
	10	3.7	1710.085	1710.00	1754.930	1755
	20	3.7	1710.113	1710.00	1754.913	1755
	30	3.7	1710.109	1710.00	1754.953	1755
	40	3.7	1710.112	1710.00	1754.970	1755
	50	3.7	1710.114	1710.00	1754.880	1755
Frequency Stability vs. Voltage	20	3.5	1710.074	1710.00	1754.948	1755
	20	4.2	1710.051	1710.00	1754.881	1755
Result:					Pass	

Test Mode:	QPSK 15kHz RB12#0	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.7	1710.143	1710.00	1754.923	1755.00
	-20	3.7	1710.111	1710.00	1754.931	1755.00
	-10	3.7	1710.123	1710.00	1754.952	1755.00
	0	3.7	1710.108	1710.00	1754.899	1755.00
	10	3.7	1710.095	1710.00	1754.932	1755.00
	20	3.7	1710.103	1710.00	1754.933	1755.00
	30	3.7	1710.101	1710.00	1754.958	1755.00
	40	3.7	1710.098	1710.00	1754.973	1755.00
	50	3.7	1710.078	1710.00	1754.877	1755.00
Frequency Stability vs. Voltage	20	3.5	1710.088	1710.00	1754.988	1755.00
	20	4.2	1710.098	1710.00	1754.883	1755.00
Result:					Pass	

Test Plots(Note: The 6.0dB is the Insertion loss of the RF cable, Power Splitter and DC Block, which was offset into the Spectrum Analyzer):

Occupied Bandwidth

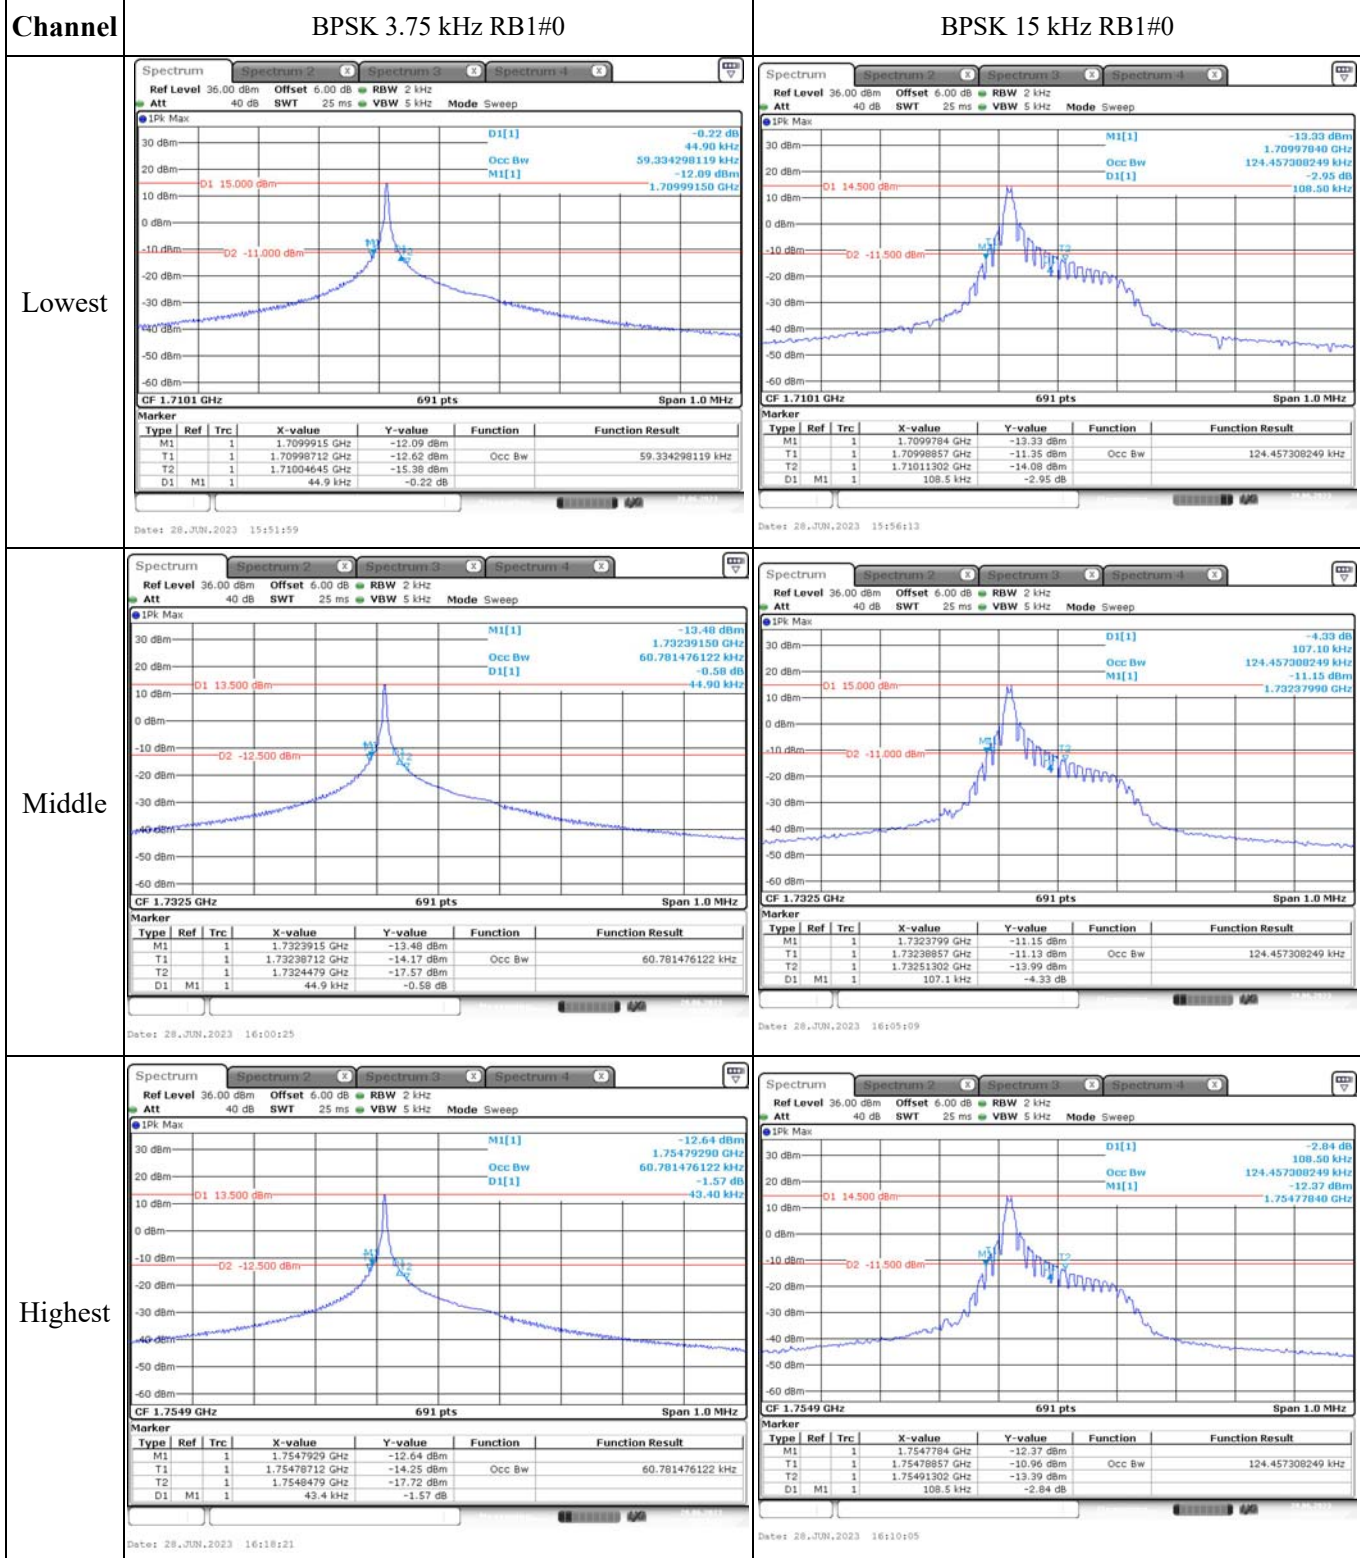



Occupied Bandwidth

Channel



QPSK 3.75 kHz RB1#0

QPSK 15 kHz RB1#0



Lowest

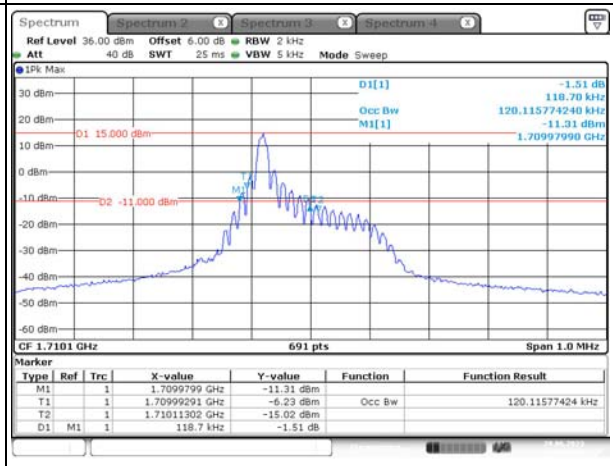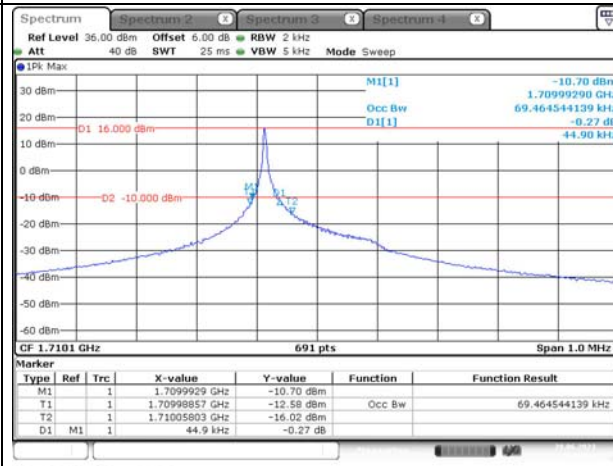

Middle

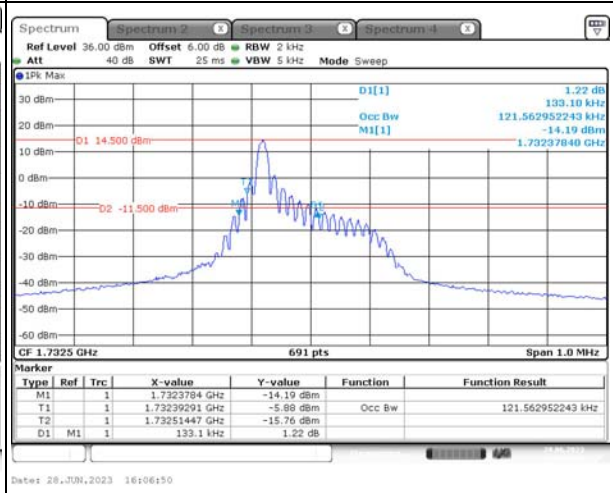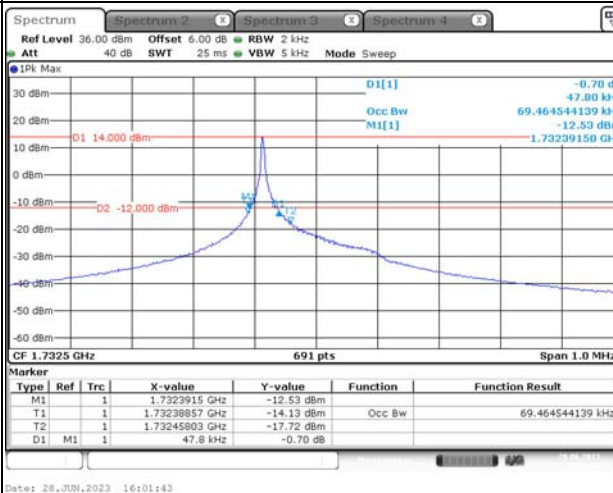

Highest

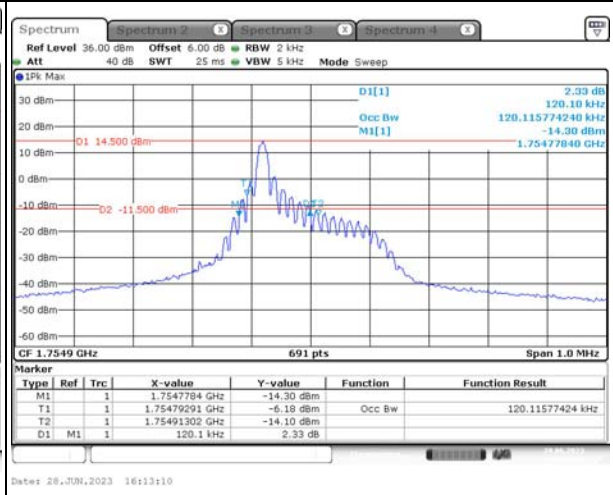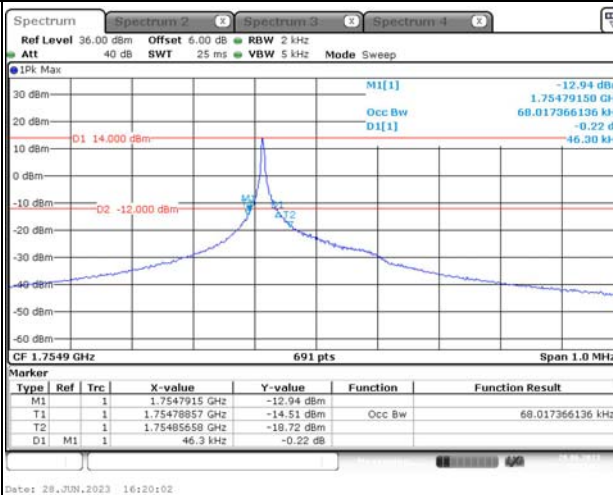


Occupied Bandwidth


Channel

QPSK 15 kHz RB12#0


Lowest

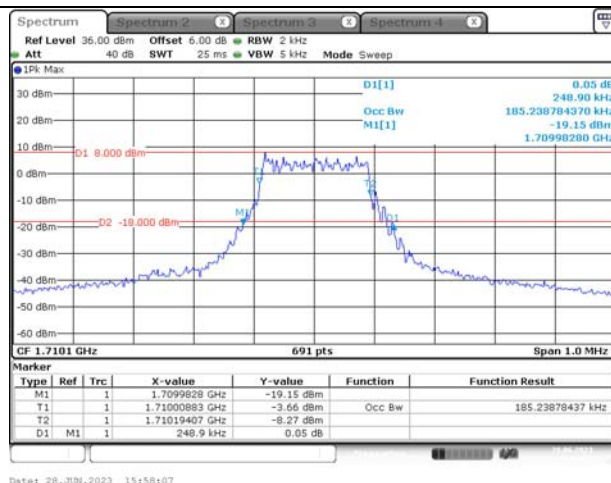

Middle

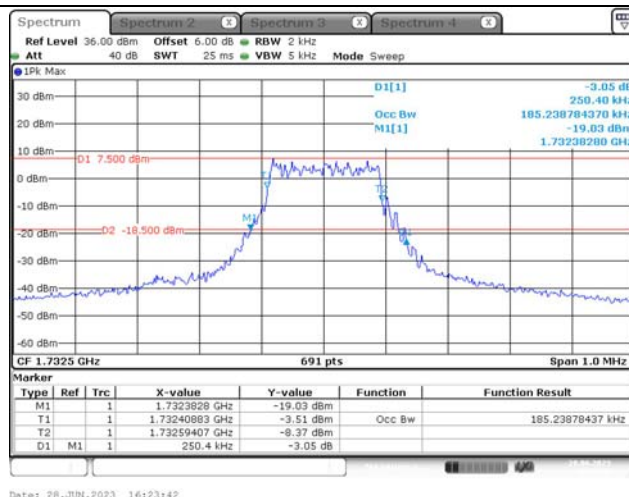

Highest


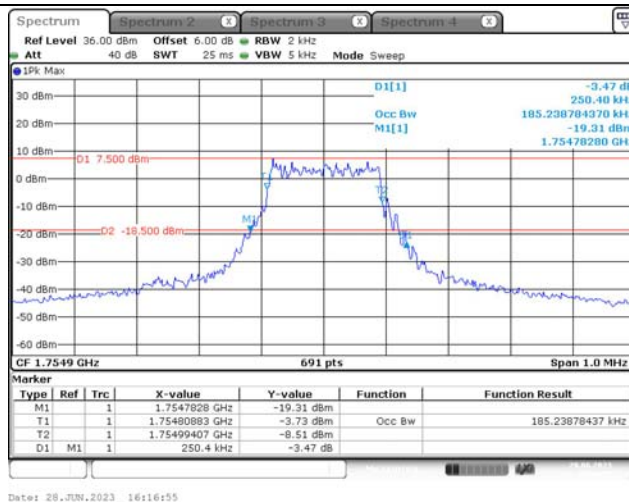


Spurious Emissions at Antenna Terminal



Channel

(Worst: BPSK 3.75K 1#0 was tested)



Lowest

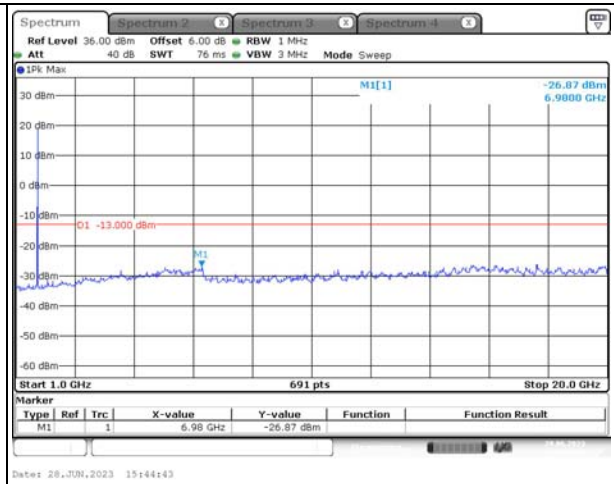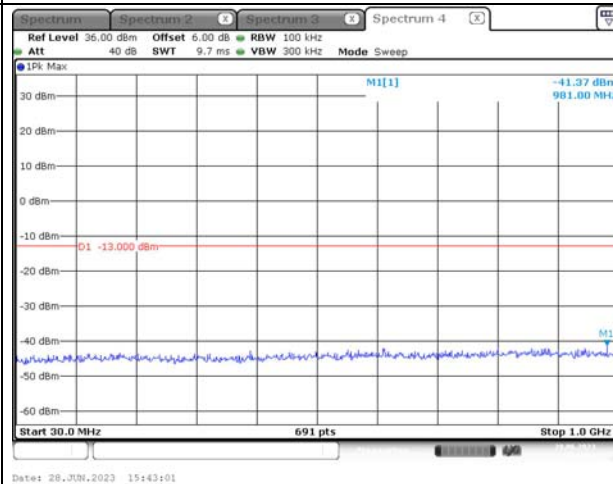


Middle

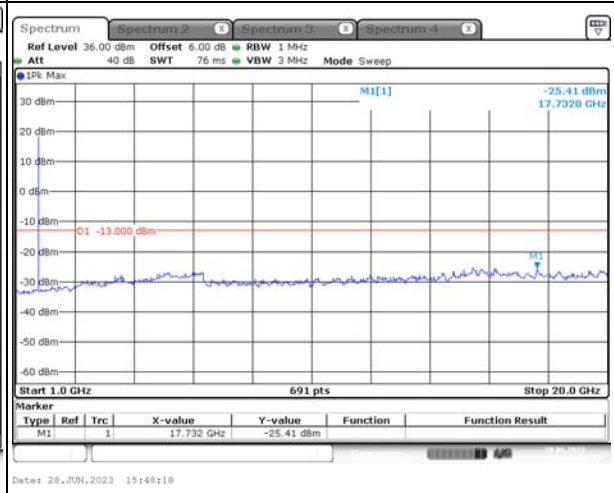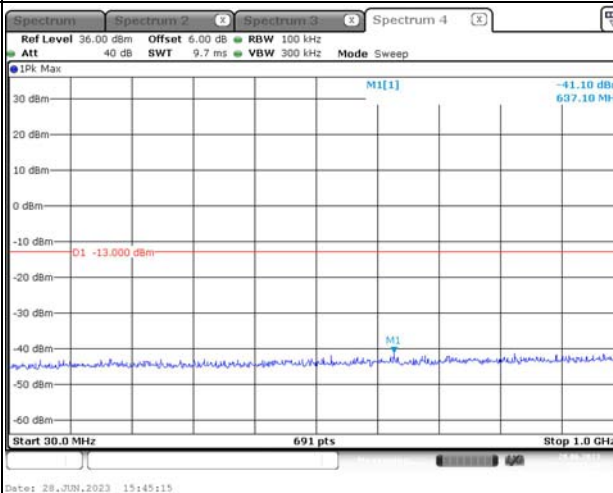


Highest

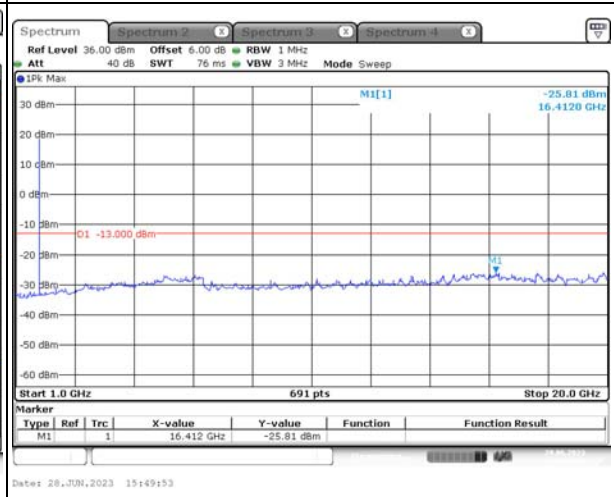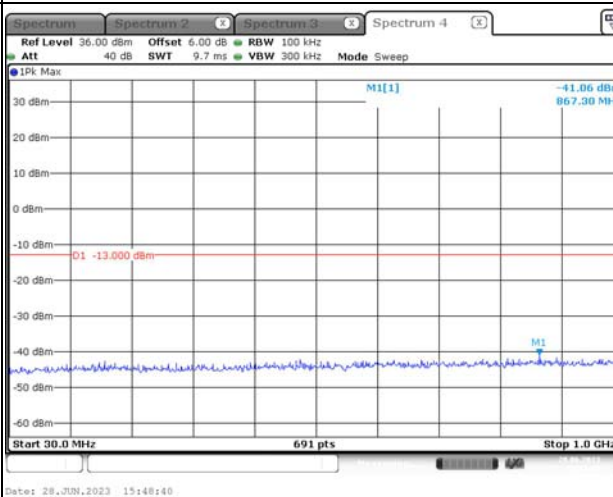


Out of band emission, Band Edge

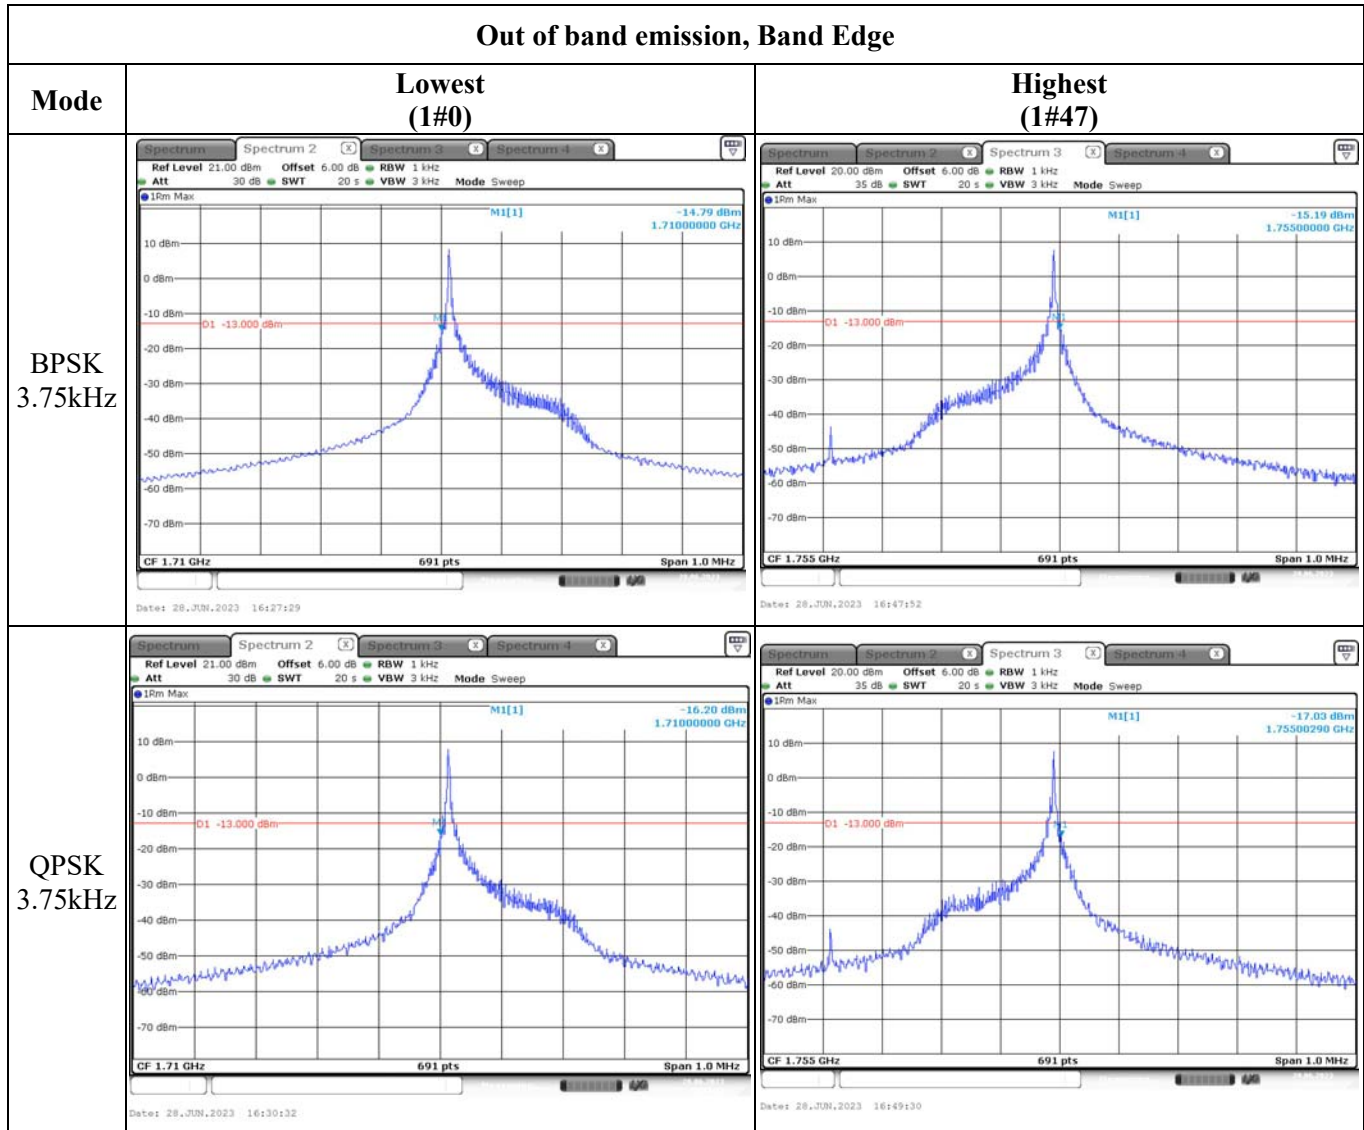

Out of band emission, Band Edge

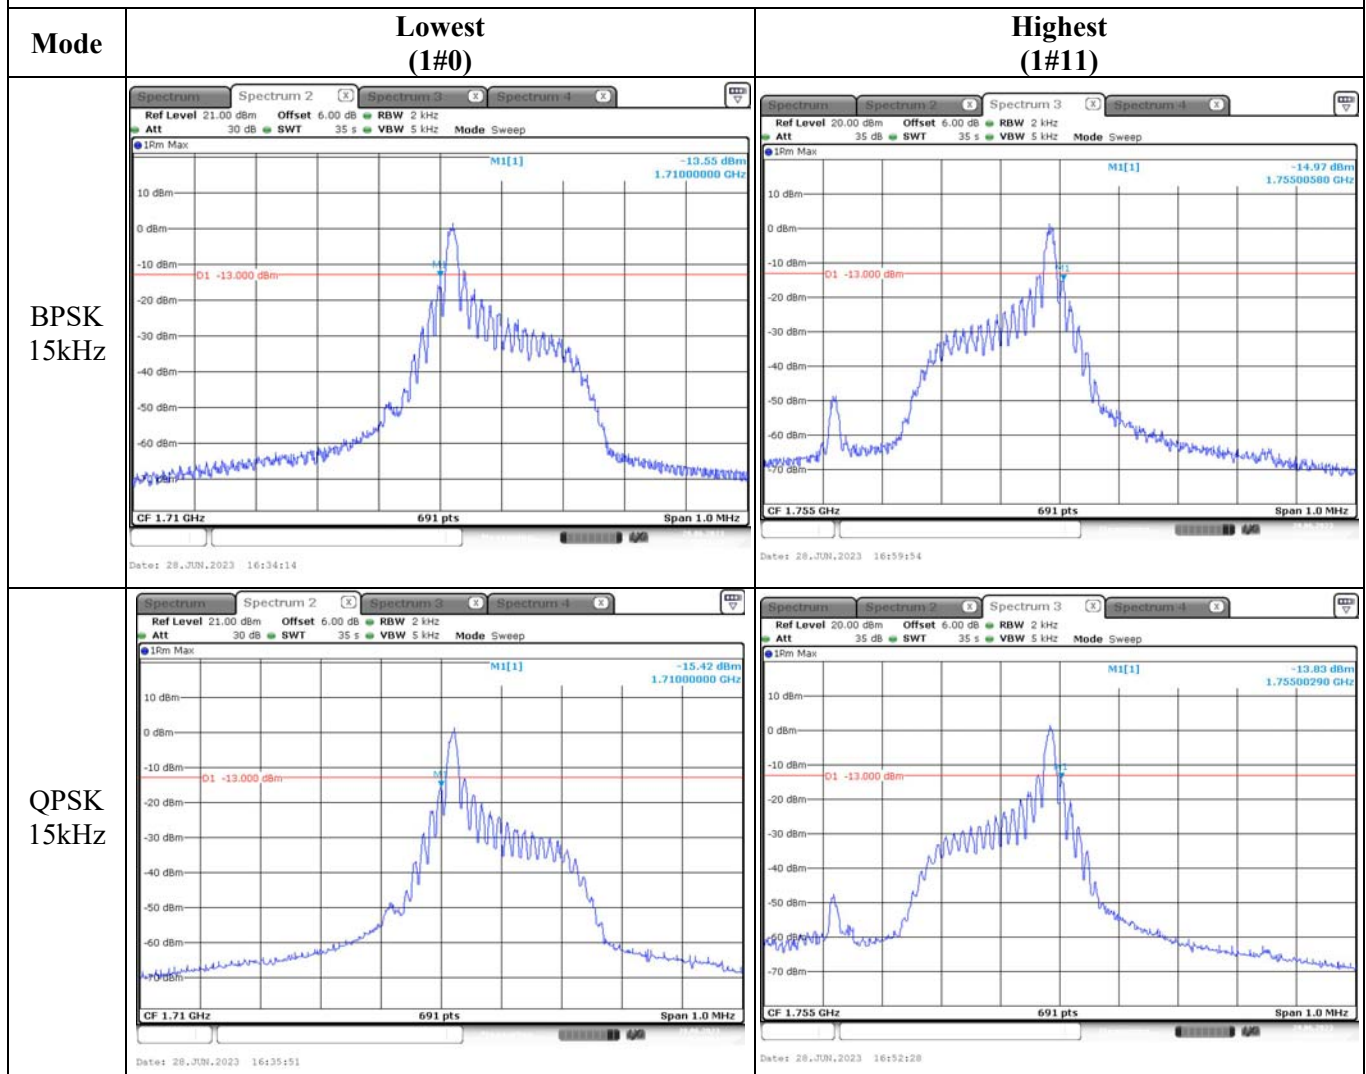

Out of band emission, Band Edge

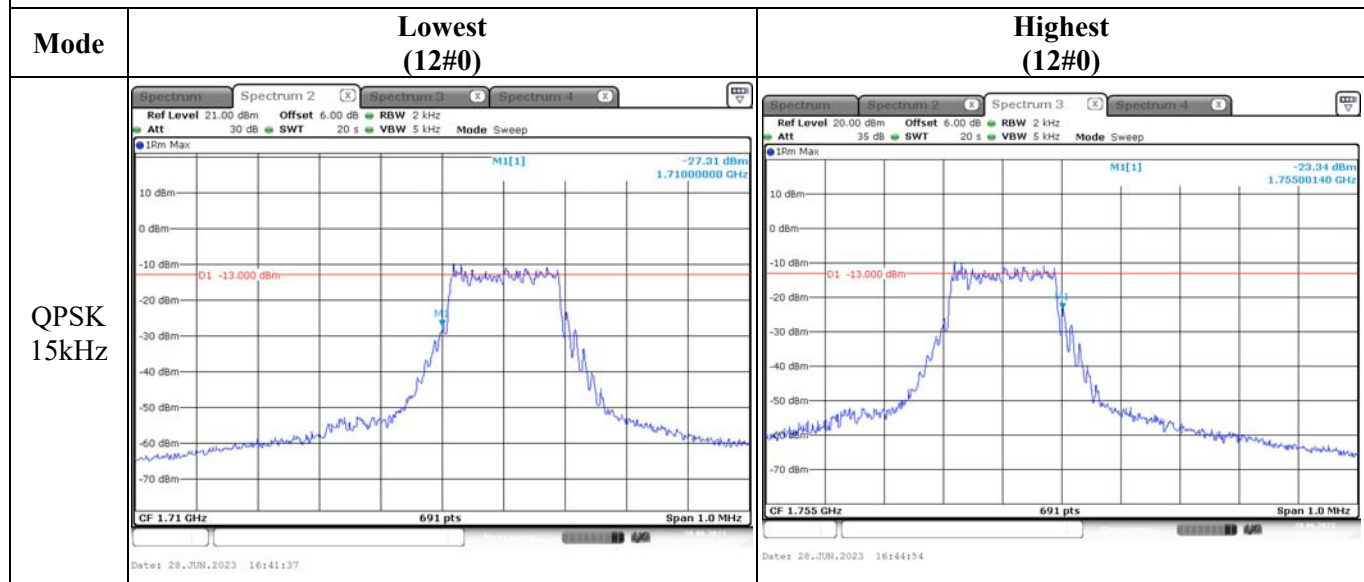

4.11 Radiated Spurious Emissions

Serial Number:	235J	Test Date:	2023/05/23~2023/05/25
Test Site:	966-1/966-2	Test Mode:	Transmitting
Tester:	Carl Xue,coco Tian	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.4~26.7	Relative Humidity: (%)	58~63	ATM Pressure: (kPa)	100.3~100.5
----------------------	-----------	---------------------------	-------	---------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020/10/19	2023/10/18
R&S	EMI Test Receiver	ESR3	102724	2022/07/15	2023/07/14
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2022/07/17	2023/07/16
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2022/07/17	2023/07/16
Sonoma	Amplifier	310N	186165	2022/07/17	2023/07/16
EMCO	Adjustable Dipole Antenna	3121C	9109-756	N/A	N/A
MICRO-COAX	Coaxial Cable	UFA210B-0-0720-300300	99G1448	2022/07/17	2023/07/16
Agilent	Signal Generator	E8247C	MY43321352	2022/11/18	2023/11/17
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020/10/13	2023/10/12
R&S	Spectrum Analyzer	FSV40	101591	2022/07/15	2023/07/14
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2022/08/07	2023/08/06
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2022/08/07	2023/08/06
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2022/11/09	2023/11/08
AH	Double Ridge Guide Horn Antenna	SAS-571	1396	2021/10/18	2024/10/17
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021/02/05	2024/02/04
AH	Preamplifier	PAM-1840VH	190	2022/11/09	2023/11/08
PASTERNAK	Horn Antenna	PE9852/2F-20	112001	2021/02/05	2024/02/04
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2022/08/07	2023/08/06

*** Statement of Traceability:** China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

The Worst modulation and bandwidth was below, please refer to the below table and plots.

Note: The device can be mounted in multiple orientations, test was performed with X,Y, Z Axis according to C63.26 figure 5, the worst orientation was photographed and it's data was recorded.

Band 2 (30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, 3.75kHz,RB1#0, Frequency:1850.1 MHz								
211.80	H	42.15	-70.51	0.00	0.26	-70.77	-13.00	57.77
57.40	V	50.55	-54.22	-11.50	0.14	-65.86	-13.00	52.86
3700.200	H	47.33	-50.00	10.60	1.25	-40.65	-13.00	27.65
3700.200	V	46.51	-50.80	10.60	1.25	-41.45	-13.00	28.45
5550.300	H	37.36	-55.90	11.44	1.49	-45.95	-13.00	32.95
5550.300	V	38.00	-55.10	11.44	1.49	-45.15	-13.00	32.15
QPSK, 3.75kHz,RB1#0, Frequency:1880 MHz								
210.40	H	42.60	-70.08	0.00	0.26	-70.34	-13.00	57.34
58.10	V	50.06	-55.04	-11.17	0.14	-66.35	-13.00	53.35
3760.000	H	46.26	-50.15	10.66	1.24	-40.73	-13.00	27.73
3760.000	V	46.01	-50.28	10.66	1.24	-40.86	-13.00	27.86
5640.000	H	37.14	-56.31	11.33	1.54	-46.52	-13.00	33.52
5640.000	V	37.73	-55.60	11.33	1.54	-45.81	-13.00	32.81
QPSK, 3.75kHz,RB1#0, Frequency:1909.9 MHz								
211.10	H	42.85	-69.82	0.00	0.26	-70.08	-13.00	57.08
57.90	V	49.96	-55.05	-11.27	0.14	-66.46	-13.00	53.46
3819.800	H	45.89	-49.98	10.72	1.29	-40.55	-13.00	27.55
3819.800	V	43.19	-52.53	10.72	1.29	-43.10	-13.00	30.10
5729.700	H	37.85	-55.63	11.22	1.59	-46.00	-13.00	33.00
5729.700	V	37.94	-55.42	11.22	1.59	-45.79	-13.00	32.79

Band 4 (30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, 3.75kHz,RB1#0, Frequency:1710.1 MHz								
211.10	H	42.26	-70.41	0.00	0.26	-70.67	-13.00	57.67
58.20	V	50.24	-54.91	-11.13	0.14	-66.18	-13.00	53.18
3420.200	H	40.69	-57.07	10.37	1.17	-47.87	-13.00	34.87
3420.200	V	43.52	-54.21	10.37	1.17	-45.01	-13.00	32.01
5130.300	H	36.94	-56.62	11.28	1.48	-46.82	-13.00	33.82
5130.300	V	36.60	-56.85	11.28	1.48	-47.05	-13.00	34.05
QPSK, 3.75kHz,RB1#0, Frequency:1732.5 MHz								
210.40	H	42.13	-70.55	0.00	0.26	-70.81	-13.00	57.81
57.40	V	50.46	-54.31	-11.50	0.14	-65.95	-13.00	52.95
3465.000	H	40.43	-57.38	10.39	1.15	-48.14	-13.00	35.14
3465.000	V	45.97	-51.80	10.39	1.15	-42.56	-13.00	29.56
5197.500	H	37.47	-56.66	11.32	1.44	-46.78	-13.00	33.78
5197.500	V	36.59	-57.39	11.32	1.44	-47.51	-13.00	34.51
QPSK, 3.75kHz,RB1#0, Frequency:1754.9MHz								
210.70	H	42.44	-70.24	0.00	0.26	-70.50	-13.00	57.50
58.80	V	50.46	-54.98	-10.85	0.14	-65.97	-13.00	52.97
3509.800	H	40.87	-56.95	10.41	1.19	-47.73	-13.00	34.73
3509.800	V	45.59	-52.16	10.41	1.19	-42.94	-13.00	29.94
5264.700	H	37.29	-56.39	11.36	1.47	-46.50	-13.00	33.50
5264.700	V	36.29	-57.17	11.36	1.47	-47.28	-13.00	34.28

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

5. RF EXPOSURE EVALUATION

5.1 MPE-Based Exemption

5.1.1 Applicable Standard

According to §1.1307(b)(3)(i)

(C) Or using Table 1 and the minimum separation distance (R in meters) from the body of a nearby person for the frequency (f in MHz) at which the source operates, the ERP (watts) is no more than the calculated value prescribed for that frequency. For the exemption in Table 1 to apply, R must be at least $\lambda/2\pi$, where λ is the free-space operating wavelength in meters. If the ERP of a single RF source is not easily obtained, then the available maximum time-averaged power may be used in lieu of ERP if the physical dimensions of the radiating structure(s) do not exceed the electrical length of $\lambda/4$ or if the antenna gain is less than that of a half-wave dipole (1.64 linear value).

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.

5.1.2 Measurement Result

Operation Modes	Frequency (MHz)	$\lambda/2\pi$ (mm)	Distance (mm)	Exemption ERP		Maximum Conducted Power including Tune-up Tolerance (dBm)	Antenna Gain (dBi)	ERP (dBm)	MPE-Based Exemption
				(mW)	(dBm)				
Band 2	1850-1910	25.82	200	768	28.85	19	5.0	21.85	Compliant
Band 4	1710-1755	27.94	200	768	28.85	19	5.0	21.85	Compliant

Note:

The Maximum Conducted Power including Tune-up Tolerance was declared by manufacturer.

Result: The device compliant the MPE-Based Exemption at 20cm distances.

==== END OF REPORT =====