

FCC/ISED TEST REPORT

Prepared for: Aerostar International

Address: 3901 W 59th Street,
Sioux Falls, SD 57108

Product: HiPointer 150

Test Report No: R240129-01-E1A

Approved By:


Fox Lane,
EMC Test Engineer

DATE: August 15, 2024

Total Pages: 39

The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

	Report Number:	R240129-01-E1	Rev	A
	Prepared for:	Aerostar International		

REVISION PAGE

Rev. No.	Date	Description
0	16 July 2024	Issued by FLane Reviewed by KVepuri Prepared by FLane
A	15 August 2024	Updated Address - FL

	Report Number:	R240129-01-E1	Rev	A
	Prepared for:	Aerostar International		

CONTENTS

Revision Page	2
1.0 Summary of test results.....	4
2.0 EUT Description	5
2.1 Equipment under test	5
2.2 Description of test modes	5
2.3 Description of support units	5
3.0 Laboratory description	6
3.1 Laboratory description	6
3.2 Test Personnel	6
3.3 Test equipment	7
4.0 Detailed results	8
4.1 Unwanted Emissions & Field Strength of emissions	8
4.2 Output Power	27
4.3 Bandwidth and Modulation Characteristics	30
4.4 Frequency Stability measurements	33
Appendix A: Sample Calculation	37
Appendix B – Measurement Uncertainty	38
REPORT END.....	39

	Report Number:	R240129-01-E1	Rev	A
	Prepared for:	Aerostar International		

1.0 SUMMARY OF TEST RESULTS

The worst-case measurements were reported in this report. The EUT has been tested according to the following specifications:

APPLIED STANDARDS AND REGULATIONS		
Standard Section	Test Type	Result
FCC Part 80.215(a)(3)	RF Output Power	Pass
FCC Part 80.213 (g)	Modulation characteristics	Pass
FCC Part 80.211(f)	Spurious Emissions	Pass
FCC Part 80.209(b)	Frequency Stability	Pass
Part 80.205(a)	Occupied bandwidth	Pass

See Section 4 for details on the test methods used for each test.

	Report Number:	R240129-01-E1	Rev	A
	Prepared for:	Aerostar International		

2.0 EUT DESCRIPTION

2.1 EQUIPMENT UNDER TEST

Model	HiPointer 150
FCC ID	2A8AZHP150-202405
EUT Received	16 February 2024
EUT Tested	16 February 2024- 21 February 2024
Serial No.	NCEETEST1 (Assigned by the test lab)
Operating Band	9410 MHz – 9460 MHz
Device Type	Licensed Radio
Power Supply	24VDC battery (2 X 12V Marine batteries)

NOTE: For more detailed features description, please refer to the manufacturer's specifications or user's manual.

2.2 DESCRIPTION OF TEST MODES

The EUT operates on, and was tested at the frequencies below:

Mode	CHANNEL FREQUENCY (MHz)
A	9410.000000
B	9460.000000
C	9410.000000
D	9460.000000

See the operational description for a list of all channel frequency and designations.

This EUT was set to transmit in a worst-case scenario. The manufacturer modified the unit to transmit continuously on four different modes.

2.3 DESCRIPTION OF SUPPORT UNITS

NA

	Report Number:	R240129-01-E1	Rev	A
	Prepared for:	Aerostar International		

3.0 LABORATORY DESCRIPTION

3.1 LABORATORY DESCRIPTION

All testing was performed at the following Facility:

The Nebraska Center for Excellence in Electronics (NCEE Labs)
 4740 Discovery Drive
 Lincoln, NE 68521

A2LA Certificate Number:	1953.01
FCC Accredited Test Site Designation No:	US1060
Industry Canada Test Site Registration No:	4294A-1
NCC CAB Identification No:	US0177

Environmental conditions varied slightly throughout the tests:

Relative humidity of $35 \pm 4\%$
 Temperature of $22 \pm 3^{\circ}$ Celsius

3.2 TEST PERSONNEL

All testing was performed by Fox Lane of NCEE Labs. The results were reviewed by Karthik Vepuri.

	Report Number:	R240129-01-E1	Rev	A
	Prepared for:	Aerostar International		

3.3 TEST EQUIPMENT

DESCRIPTION AND MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CALIBRATION DATE	CALIBRATION DUE DATE
Keysight MXE Signal Analyzer (44GHz)	N9038A	MY59050109	July 17, 2023	July 17, 2025
Keysight MXE Signal Analyzer (26.5GHz)	N9038A	MY56400083	July 17, 2023	July 17, 2025
SunAR RF Motion	JB1	A091418	July 27, 2023	July 26, 2024
ETS-Lindgren Red Horn Antenna	3115	218576	July 31, 2023	July 30, 2024
ETS Red Preamplifier (Orange)*	3115-PA	00218576	January 22, 2024	January 22, 2026
RF Cable (preamplifier to antenna)*	MFR-57500	01-07-002	June 5, 2023	June 5, 2025
Trilithic High Pass Filter*	6HC330	23042	June 5, 2023	June 5, 2025
Keysight, External Harmonic Mixer, 75-110G	M1971W	MY56390145	April 12, 2019	April 11, 2025
Sage Standard Gain Horn Antenna, 75-110G	SAZ-2410-10-S1	16434-01	CNR	CNR
Cable to M1971W, 75-110G	SLU18-SMNM-01.00M	121108	April 12, 2019	April 11, 2025
Cable to M1970V-002, 75-110G	SLU18-SMNM-01.00M	121099	April 13, 2019	April 12, 2025
Keysight, External Harmonic Mixer, 50-80G	M1970V-002	MY51391050	April 13, 2019	April 12, 2025
Pasternack Standard Gain Horn Antenna, 50-80G	PE9881-24	32/2016	CNR	CNR
ETS – Lindgren- VSWR on 10m Chamber	10m Semi-anechoic chamber-VSWR	4740 Discovery Drive	May 15, 2024	May 15, 2027
NCEE Labs-NSA on 10m Chamber*	10m Semi-anechoic chamber-NSA	NCEE-001	May 22, 2024	May 22, 2026
RF Cable (antenna to 10m chamber bulkhead)*	FSCM 64639	01E3872	June 5, 2023	June 5, 2025
RF Cable (10m chamber bulkhead to control room bulkhead)*	FSCM 64639	01E3874	June 5, 2023	June 5, 2025
RF Cable (control room bulkhead to test receiver)*	FSCM 64639	01F1206	June 5, 2023	June 5, 2025
N connector bulkhead (10m chamber)*	PE9128	NCEEBH1	June 5, 2023	June 5, 2025
N connector bulkhead (control room)*	PE9128	NCEEBH2	June 5, 2023	June 5, 2025

*Internal Characterization

	Report Number:	R240129-01-E1	Rev	A
	Prepared for:	Aerostar International		

4.0 DETAILED RESULTS

4.1 UNWANTED EMISSIONS & FIELD STRENGTH OF EMISSIONS

Test Method: ANSI C63.26:2015:
Section 5.5, "Radiated Emissions Testing"

Limits for field strength of emissions measurements:
47 CFR 80.211(f):

The mean power when using emissions other than those in paragraphs (a), (b), (c) and (d) of this section:

- (1) On any frequency removed from the assigned frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: At least 25 dB;
- (2) On any frequency removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: At least 35 dB; and
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 plus $10\log_{10}(\text{mean power in watts})\text{dB}$.

Test procedures:

The EUT was connected directly to a spectrum analyzer using attenuators to protect the test equipment. Analyzer measurement settings can be found in the plots below along with the corresponding power levels.

All Radiated Emissions were performed at 3m test distance.

Deviations from test standard:

No deviation.

	Report Number:	R240129-01-E1	Rev	A
	Prepared for:	Aerostar International		

Test setup:

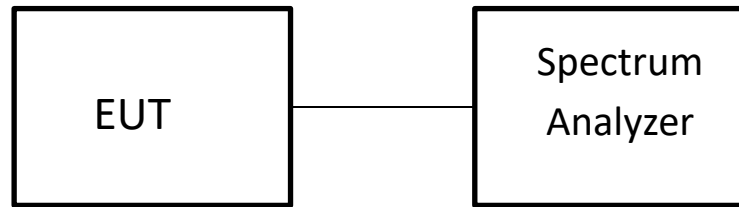


Figure 1 - Conducted Spurious Test Setup

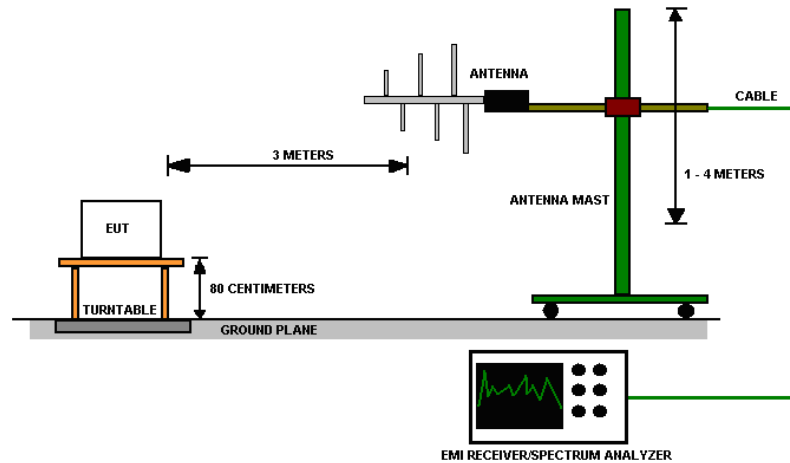


Figure 2 - Radiated Emissions Test Setup

EUT operating conditions

See Section 2.1 & 2.2

	Report Number:	R240129-01-E1	Rev	A
	Prepared for:	Aerostar International		

Test results:

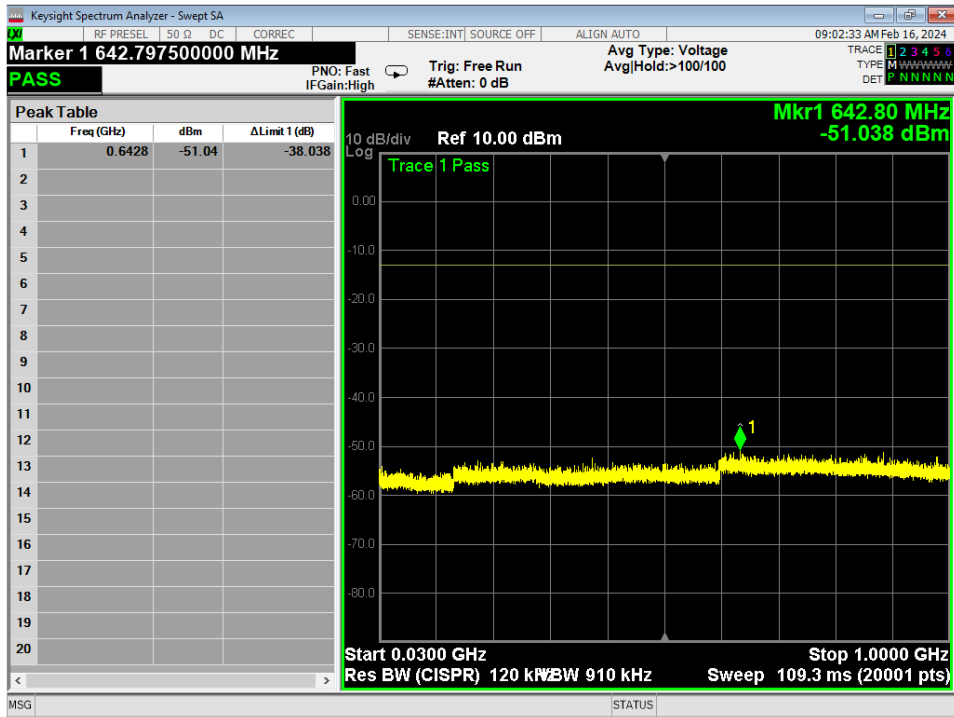


Figure 3 - Conducted Unwanted Emissions Plot, 30MHz-1GHz, Mode A

*Limit is -13dBm – Pass

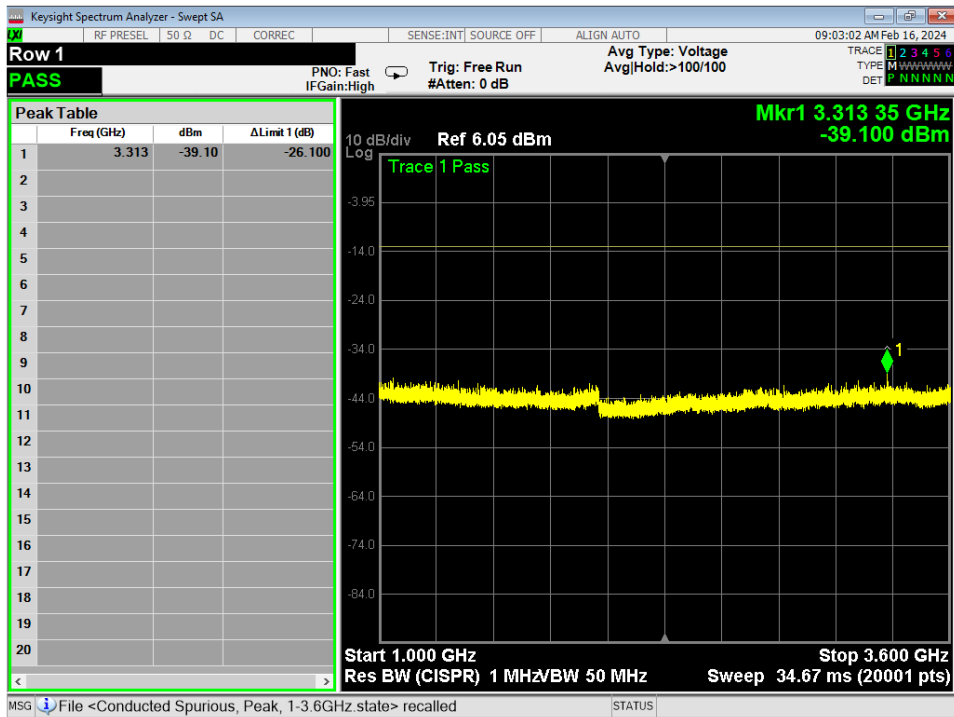


Figure 4 - Conducted Unwanted Emissions Plot, 1GHz-3.6GHz, Mode A

*Limit is -13dBm – Pass

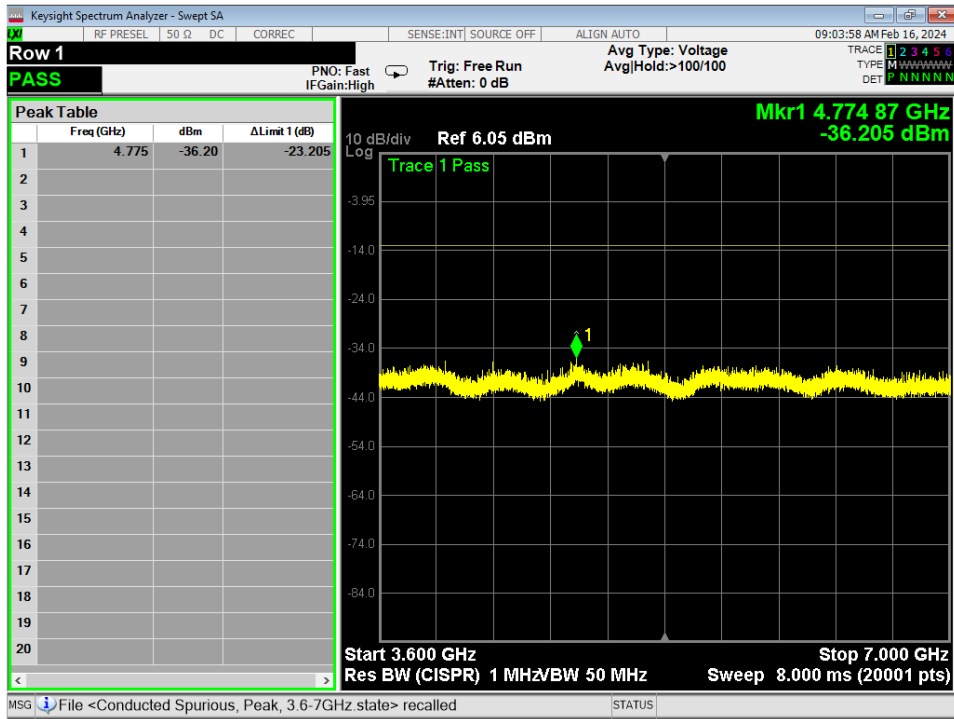


Figure 5 - Conducted Unwanted Emissions Plot, 3.6GHz-7GHz, Mode A

*Limit is -13dBm – Pass

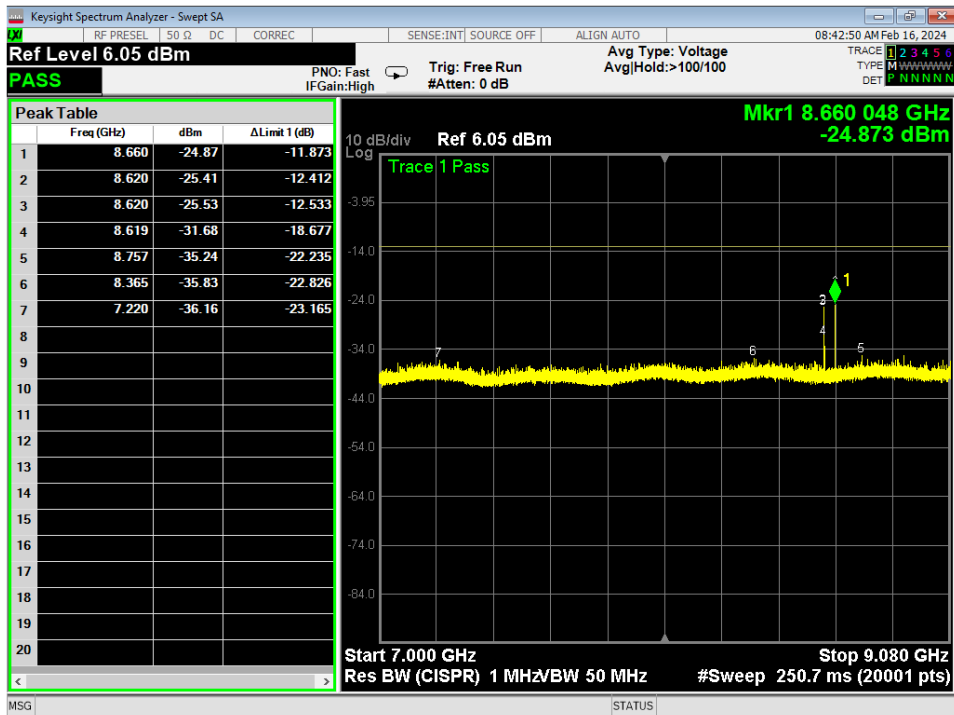


Figure 6 - Conducted Unwanted Emissions Plot, 7GHz-9.08GHz, Mode A

*Limit is -13dBm – Pass

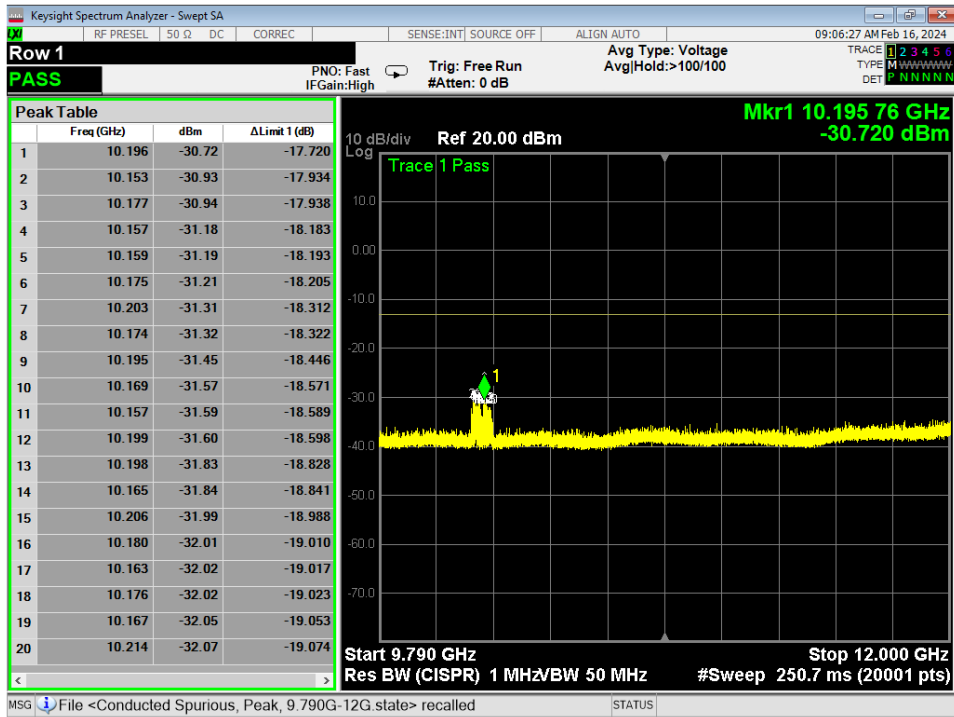


Figure 7 - Conducted Unwanted Emissions Plot, 9.79GHz-12GHz, Mode A
*Limit is -13dBm – Pass

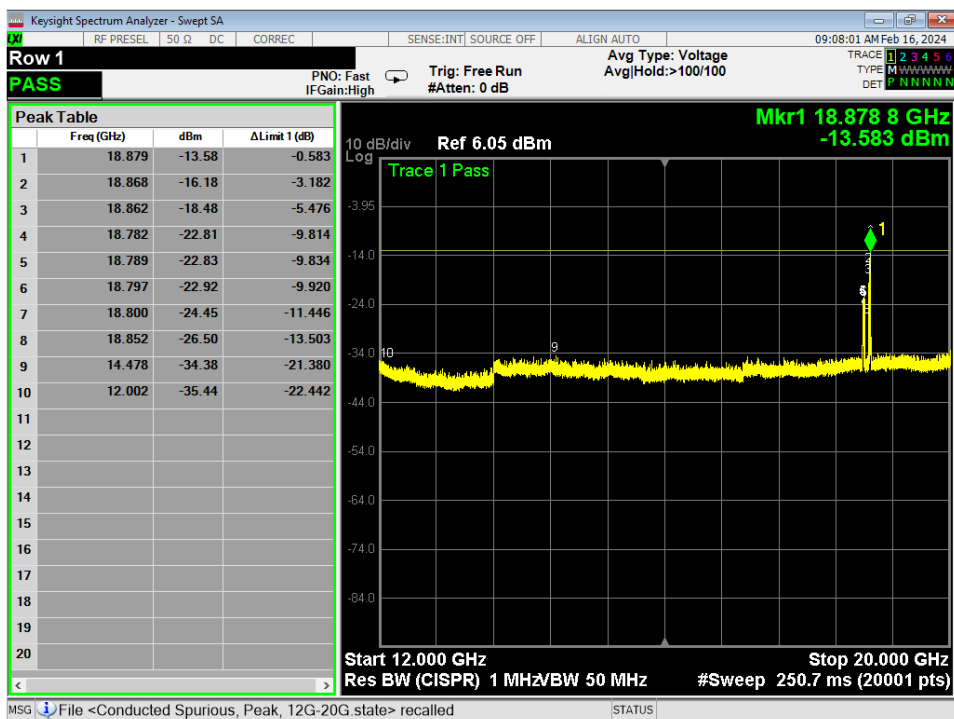


Figure 8 - Conducted Unwanted Emissions Plot, 12GHz-20GHz, Mode A
*Limit is -13dBm – Pass

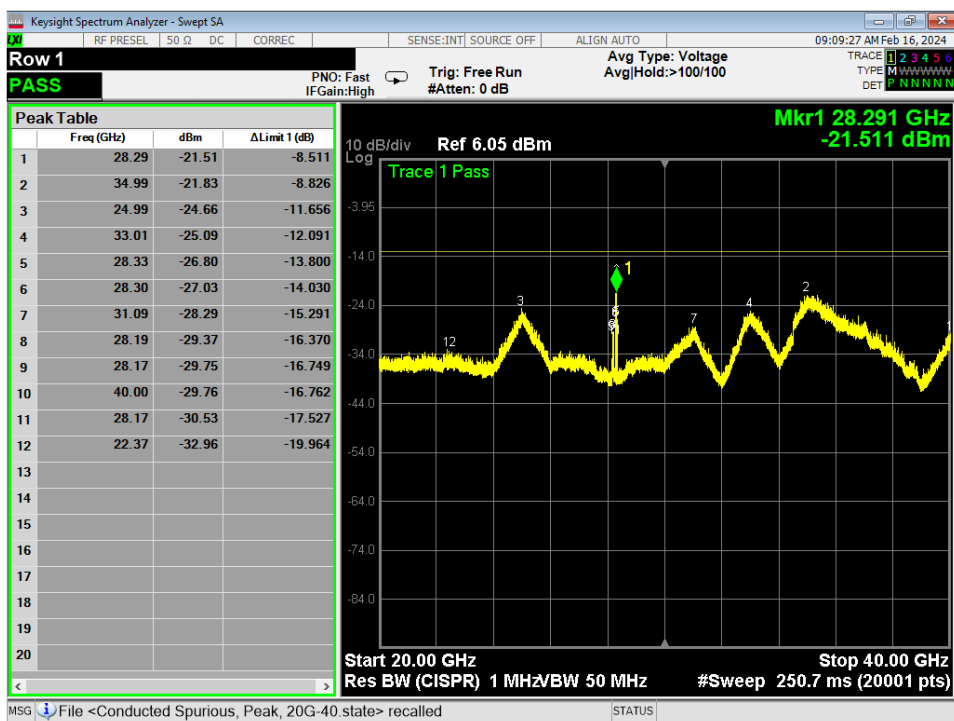


Figure 9 - Conducted Unwanted Emissions Plot, 20GHz-40GHz, Mode A

*Limit is -13dB – Pass

All other measurements including above 40 GHz were investigated and found to be below the laboratory noise floor and at least 6 dB below the limits.

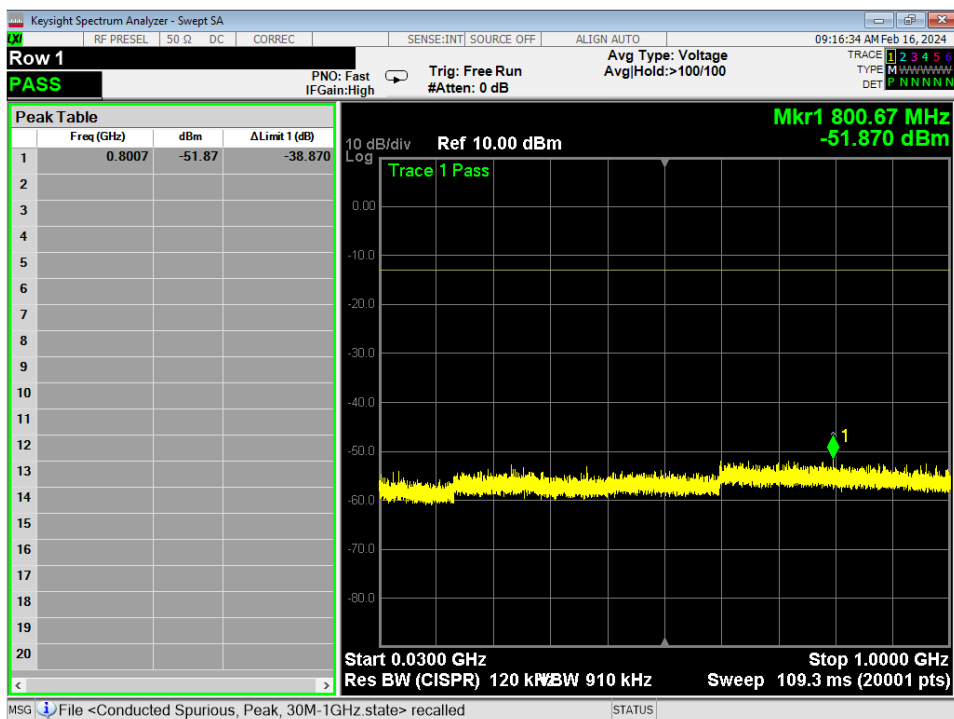


Figure 10 - Conducted Unwanted Emissions Plot, 30MHz-1GHz, Mode B

*Limit is -13dBm – Pass

	Report Number:	R240129-01-E1	Rev	A
	Prepared for:	Aerostar International		

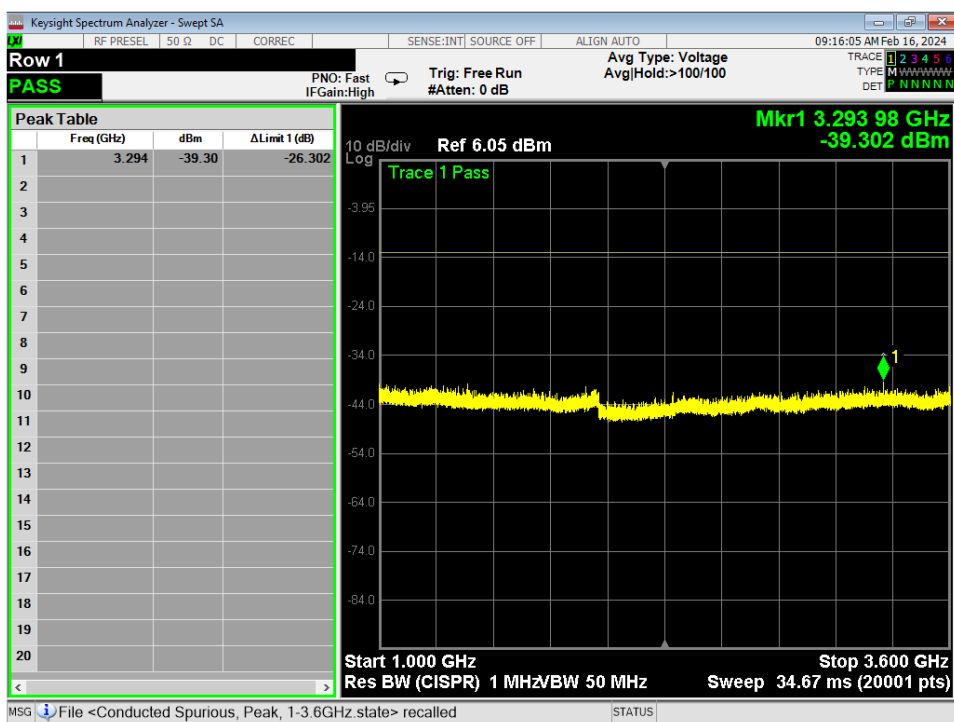


Figure 11 - Conducted Unwanted Emissions Plot, 1GHz-3.6GHz, Mode B

*Limit is -13dBm – Pass

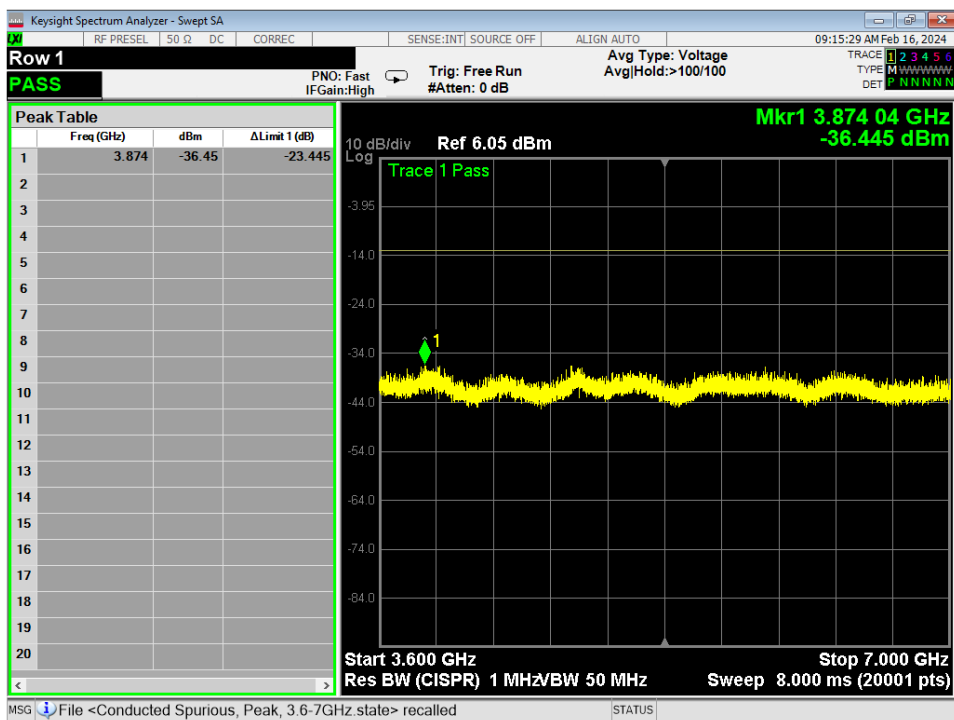


Figure 12 - Conducted Unwanted Emissions Plot, 3.6GHz-7GHz, Mode B

*Limit is -13dBm – Pass

	Report Number:	R240129-01-E1	Rev	A
	Prepared for:	Aerostar International		

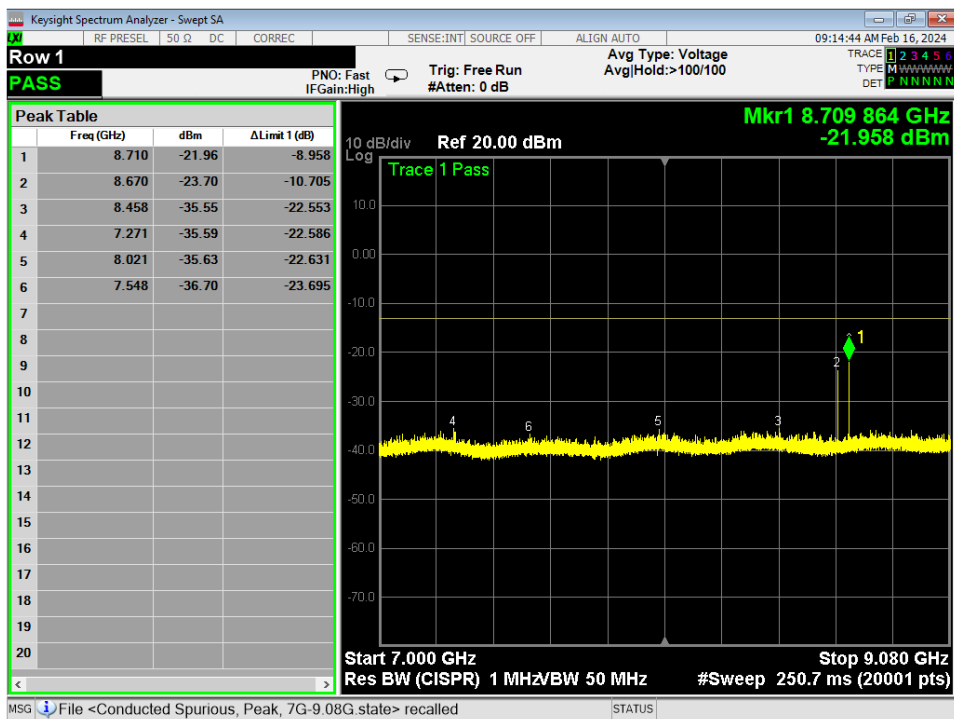


Figure 13 - Conducted Unwanted Emissions Plot, 7GHz-9.08GHz, Mode B
*Limit is -13dBm – Pass

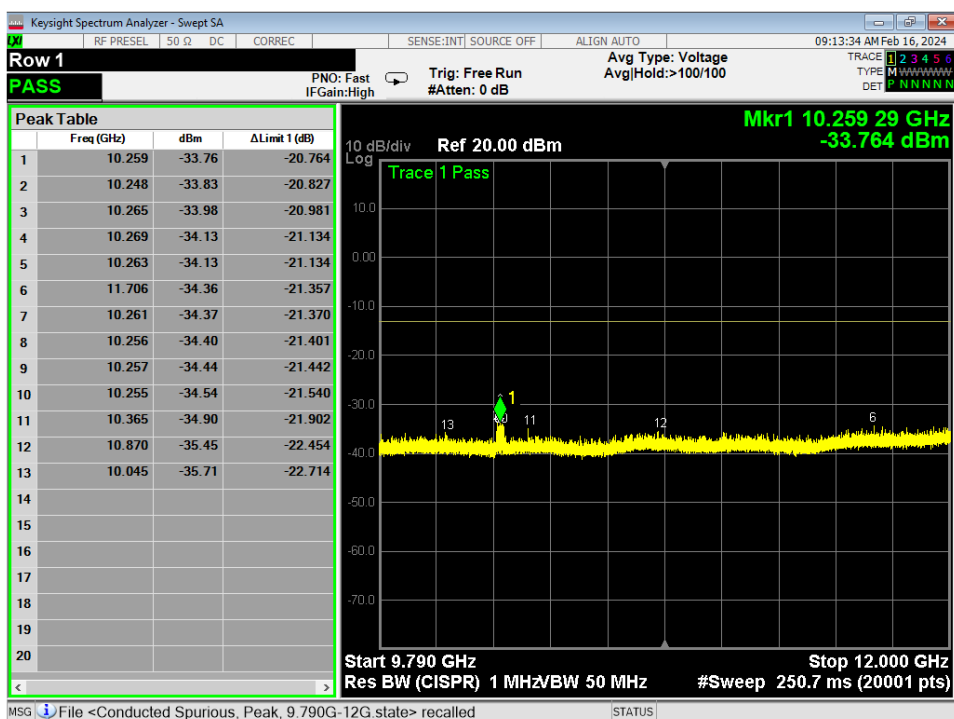


Figure 14 - Conducted Unwanted Emissions Plot, 9.79GHz-12GHz, Mode B
*Limit is -13dBm – Pass

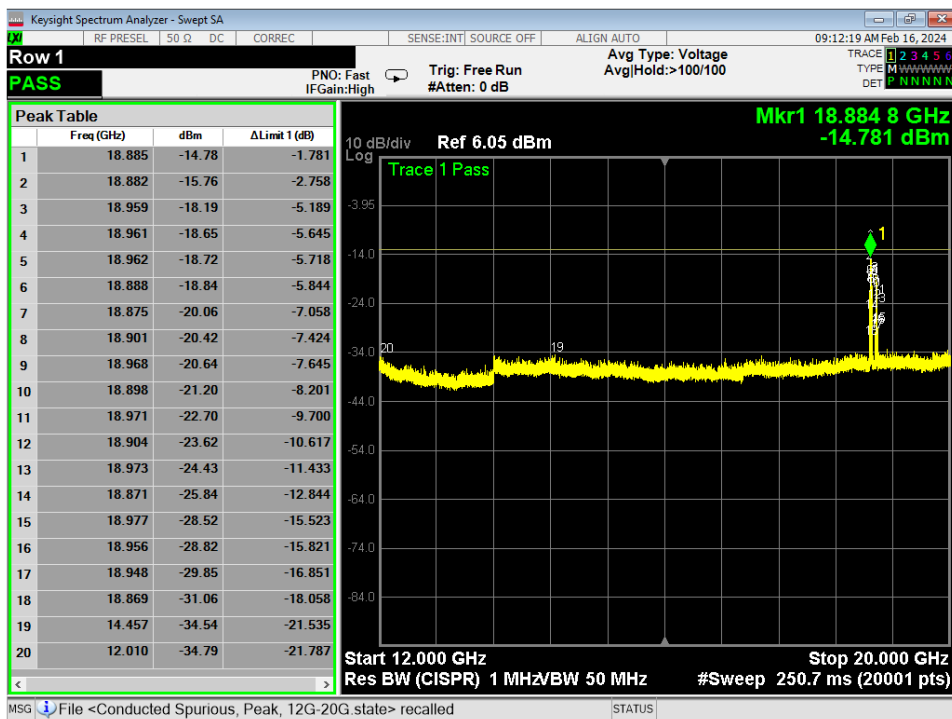


Figure 15 - Conducted Unwanted Emissions Plot, 12GHz-20GHz, Mode B
*Limit is -13dBm – Pass

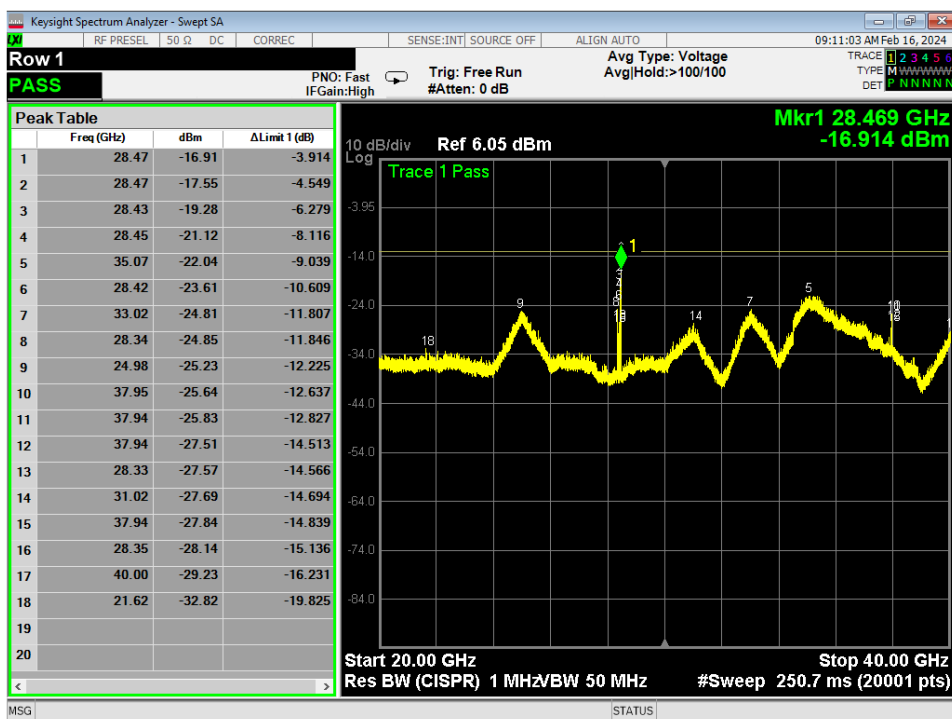


Figure 16 - Conducted Unwanted Emissions Plot, 20GHz-40GHz, Mode B
*Limit is -13dB – Pass

All other measurements including above 40 GHz were investigated and found to be below the laboratory noise floor and at least 6 dB below the limits.

	Report Number:	R240129-01-E1	Rev	A
	Prepared for:	Aerostar International		

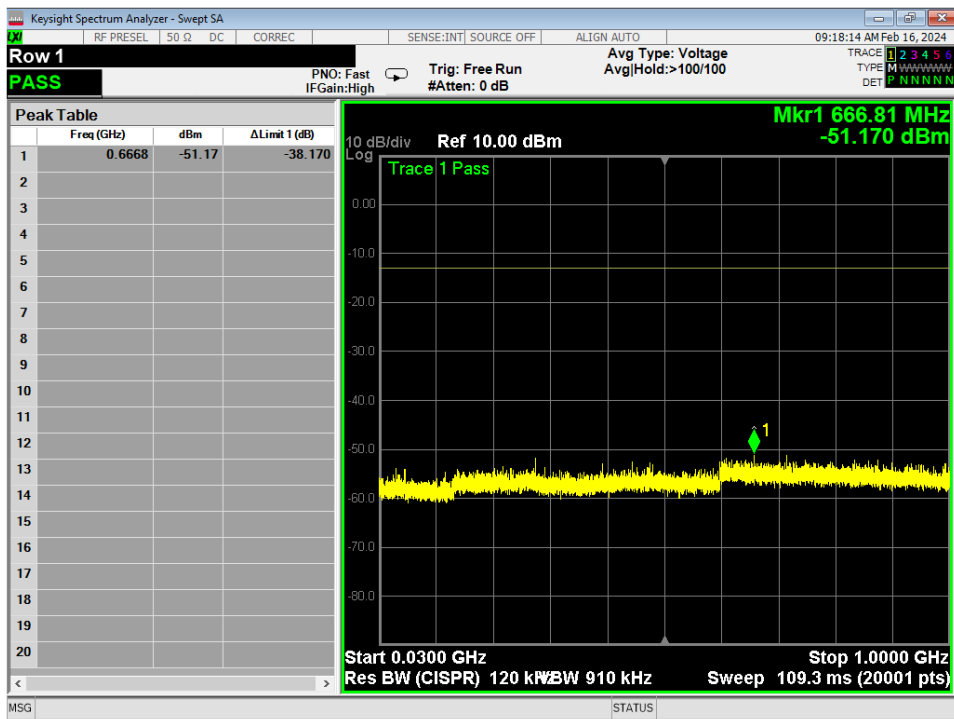


Figure 17 - Conducted Unwanted Emissions Plot, 30MHz-1GHz, Mode C

*Limit is -13dBm – Pass

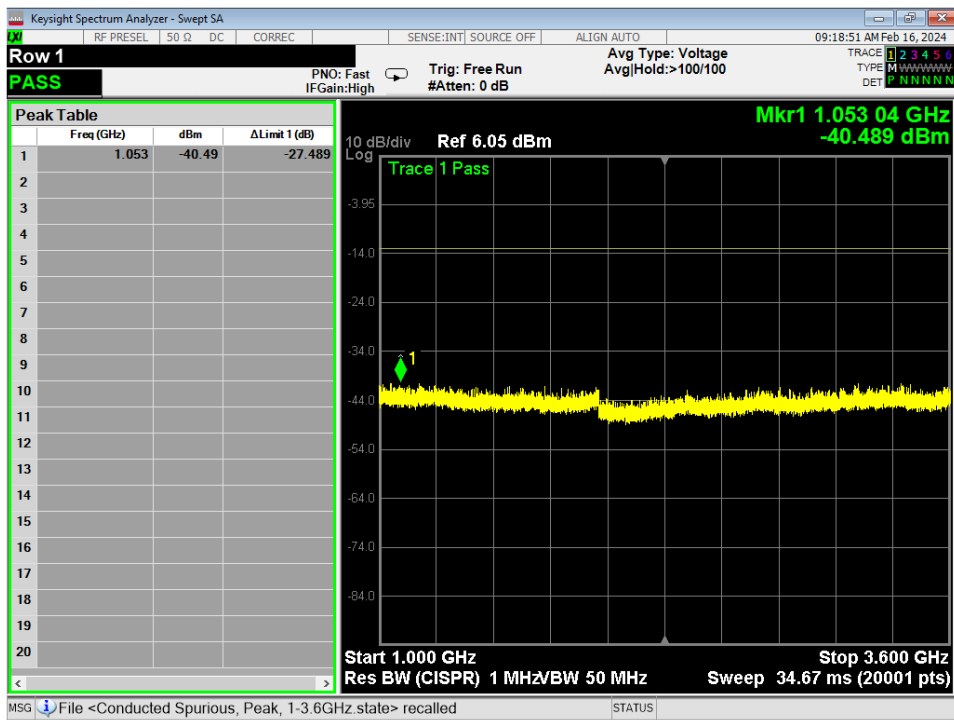


Figure 18 - Conducted Unwanted Emissions Plot, 1GHz-3.6GHz, Mode C

*Limit is -13dBm – Pass

	Report Number:	R240129-01-E1	Rev	A
	Prepared for:	Aerostar International		

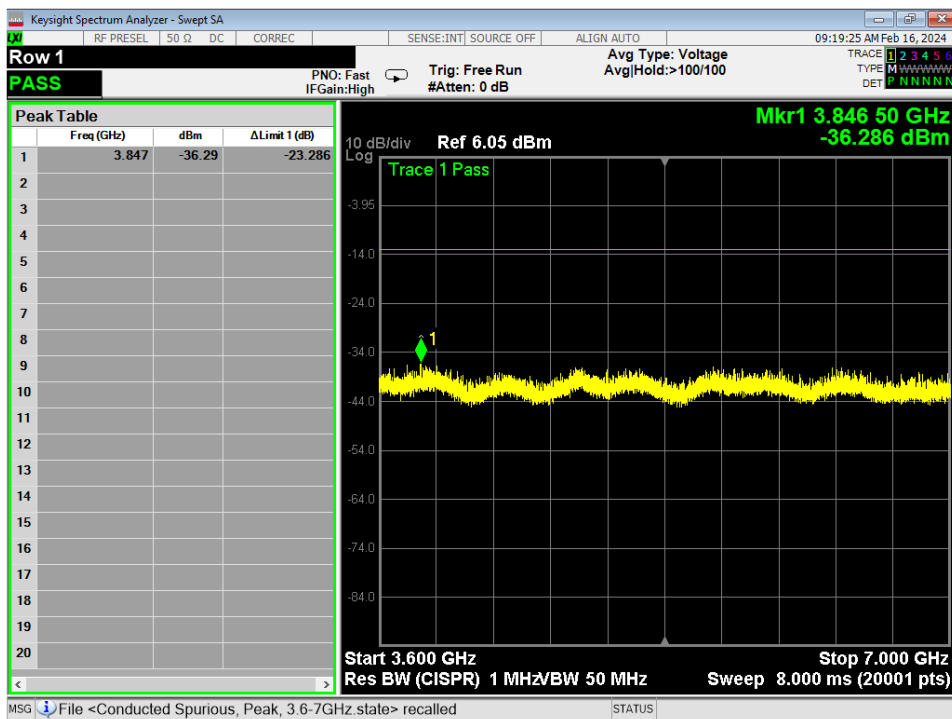


Figure 19 - Conducted Unwanted Emissions Plot, 3.6GHz-7GHz, Mode C
*Limit is -13dBm – Pass

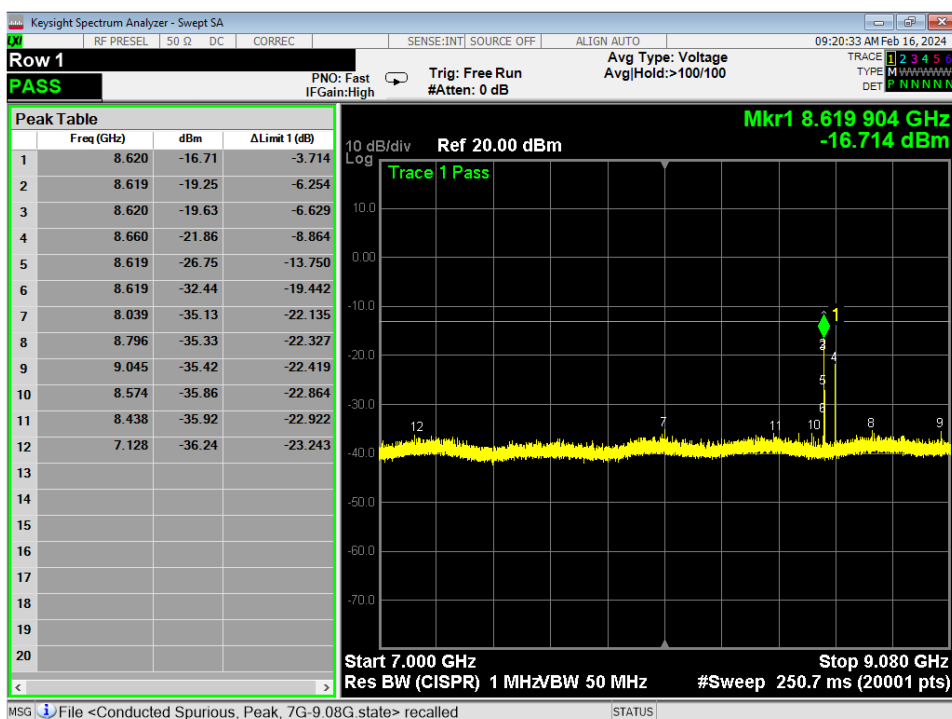


Figure 20 - Conducted Unwanted Emissions Plot, 7GHz-9.08GHz, Mode C
*Limit is -13dBm – Pass

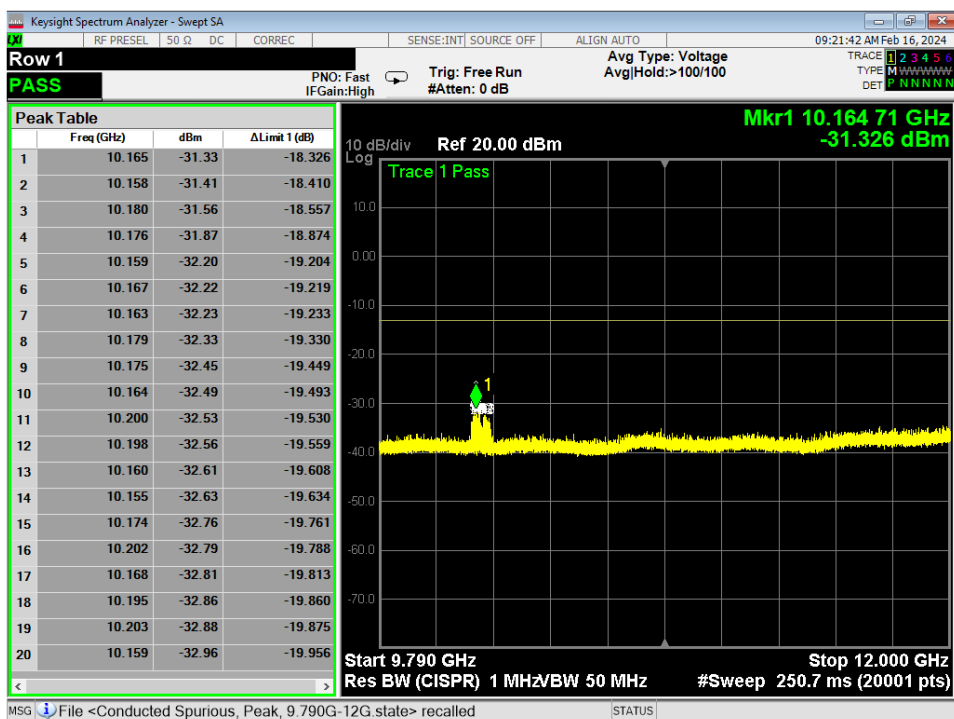


Figure 21 - Conducted Unwanted Emissions Plot, 9.79GHz-12GHz, Mode C
*Limit is -13dBm – Pass

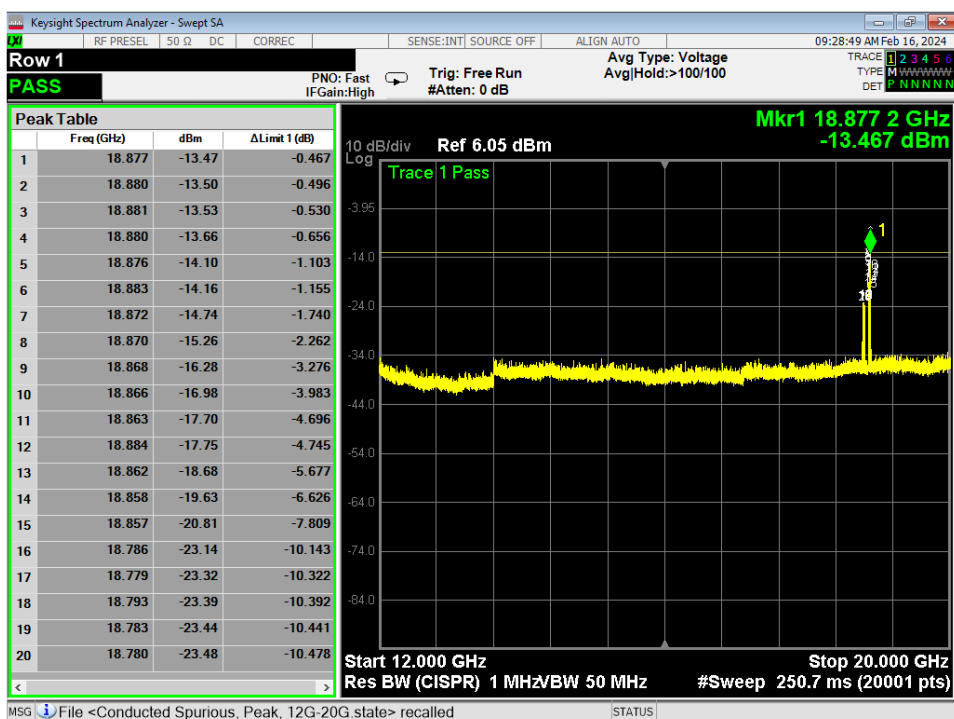


Figure 22 - Conducted Unwanted Emissions Plot, 9.79GHz-12GHz, Mode C
*Limit is -13dBm – Pass

	Report Number: R240129-01-E1	Rev	A
	Prepared for: Aerostar International		

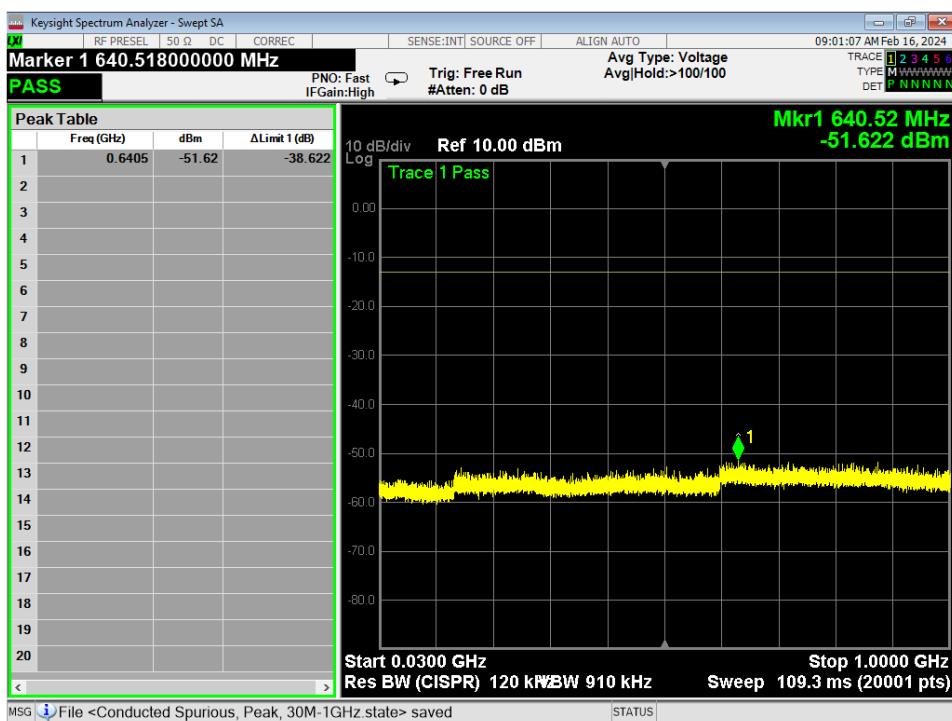


Figure 25 - Conducted Unwanted Emissions Plot, 30MHz-1GHz, Mode D

*Limit is -13dBm – Pass

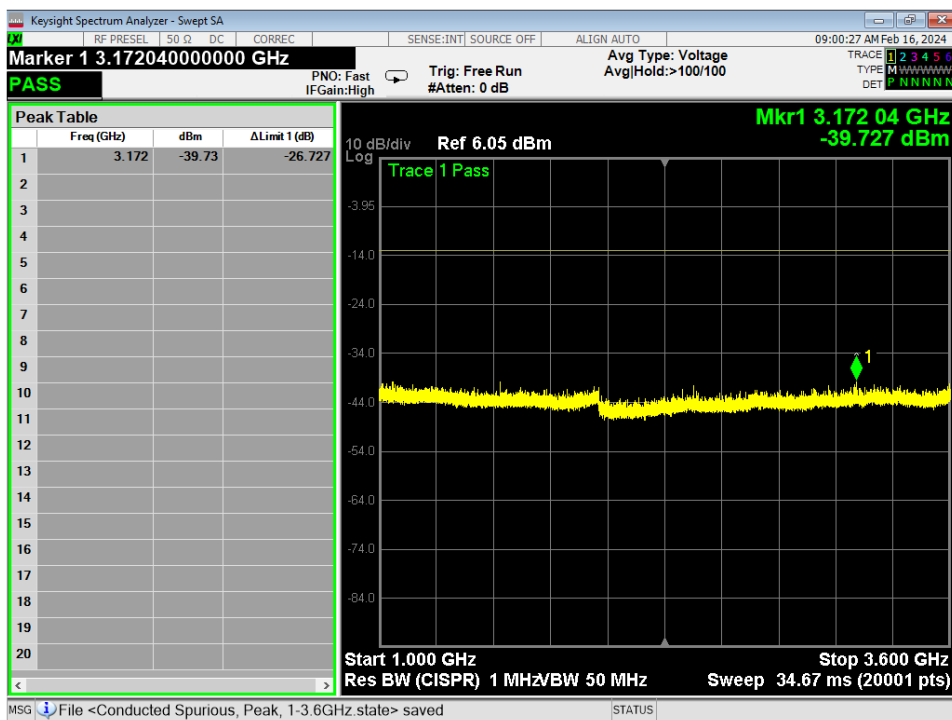


Figure 26 - Conducted Unwanted Emissions Plot, 1GHz-3.6GHz, Mode D

*Limit is -13dBm – Pass

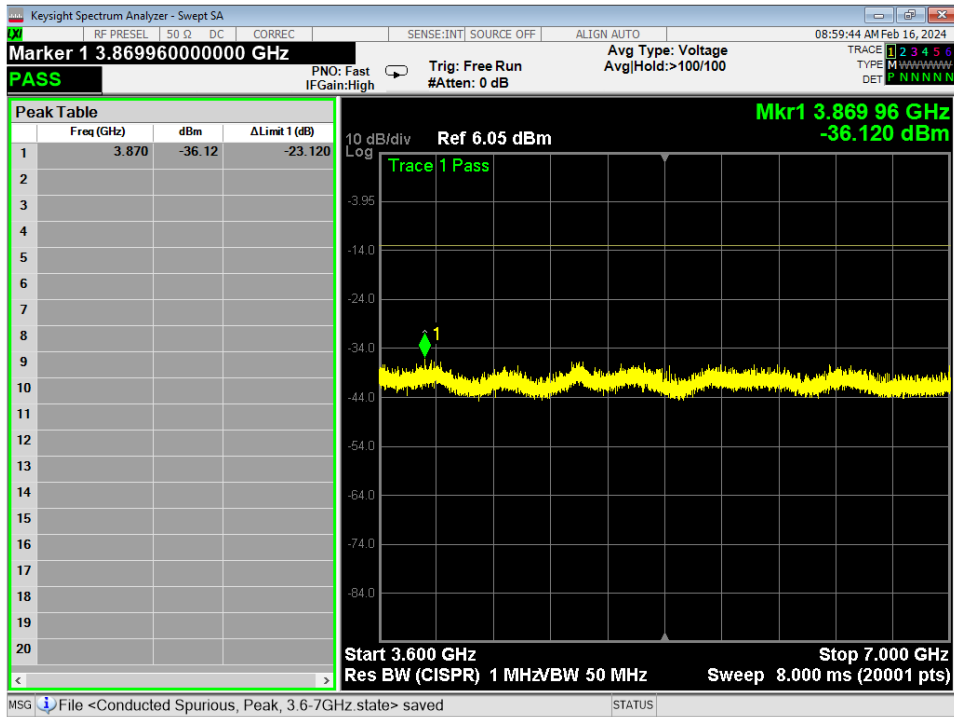


Figure 27 - Conducted Unwanted Emissions Plot, 3.6GHz-7GHz, Mode D
*Limit is -13dBm – Pass

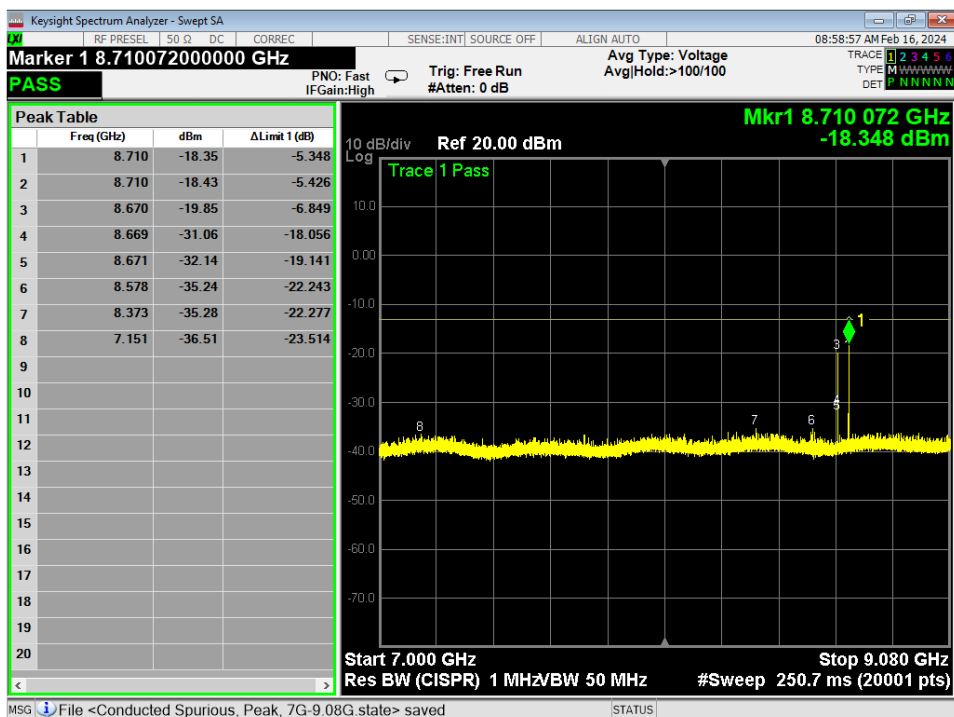


Figure 28 - Conducted Unwanted Emissions Plot, 7GHz-9.08GHz, Mode D
*Limit is -13dBm – Pass

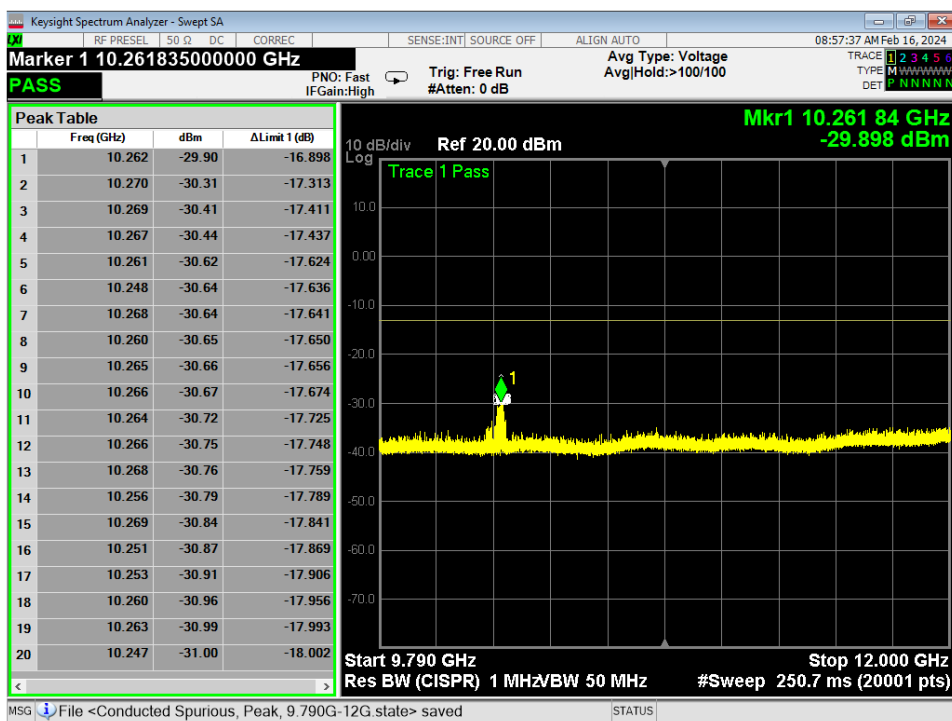


Figure 29 - Conducted Unwanted Emissions Plot, 9.79GHz-12GHz, Mode D
*Limit is -13dBm – Pass

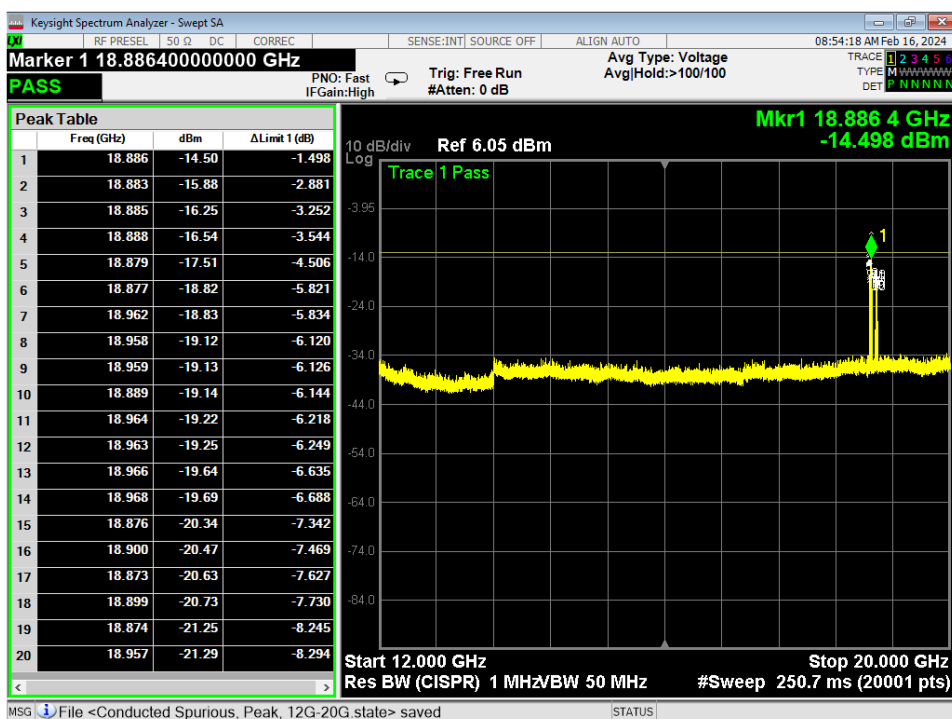


Figure 30 - Conducted Unwanted Emissions Plot, 12GHz-20GHz, Mode D
*Limit is -13dBm – Pass

	Report Number: R240129-01-E1	Rev	A
	Prepared for: Aerostar International		

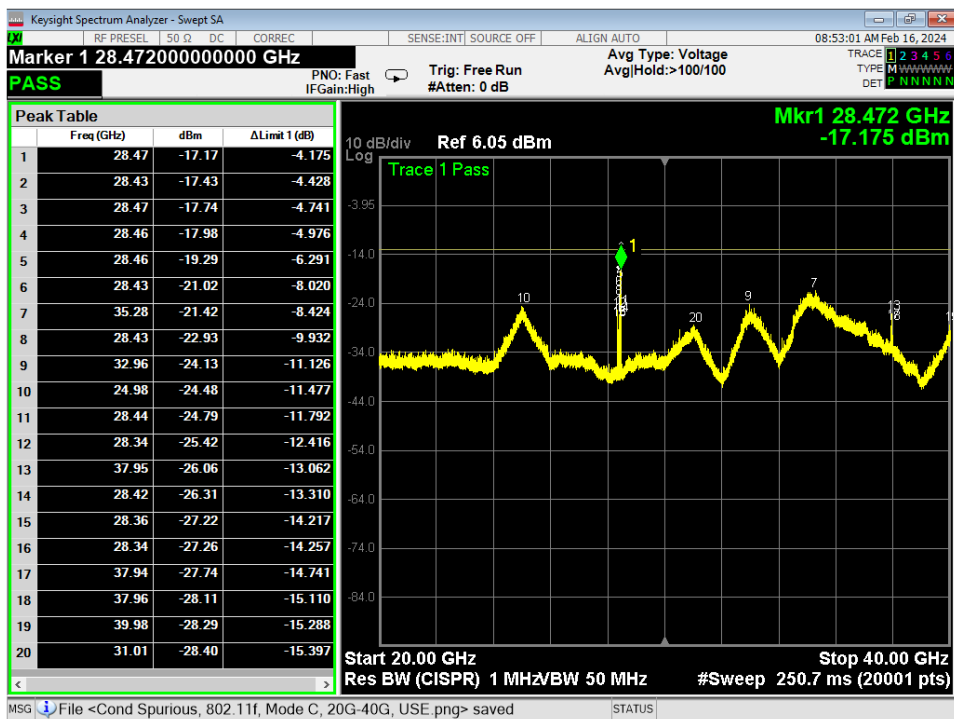


Figure 31 - Conducted Unwanted Emissions Plot, 20GHz-40GHz, Mode D

*Limit is -13dB – Pass

All other measurements including above 40 GHz were investigated and found to be below the laboratory noise floor and at least 6 dB below the limits.

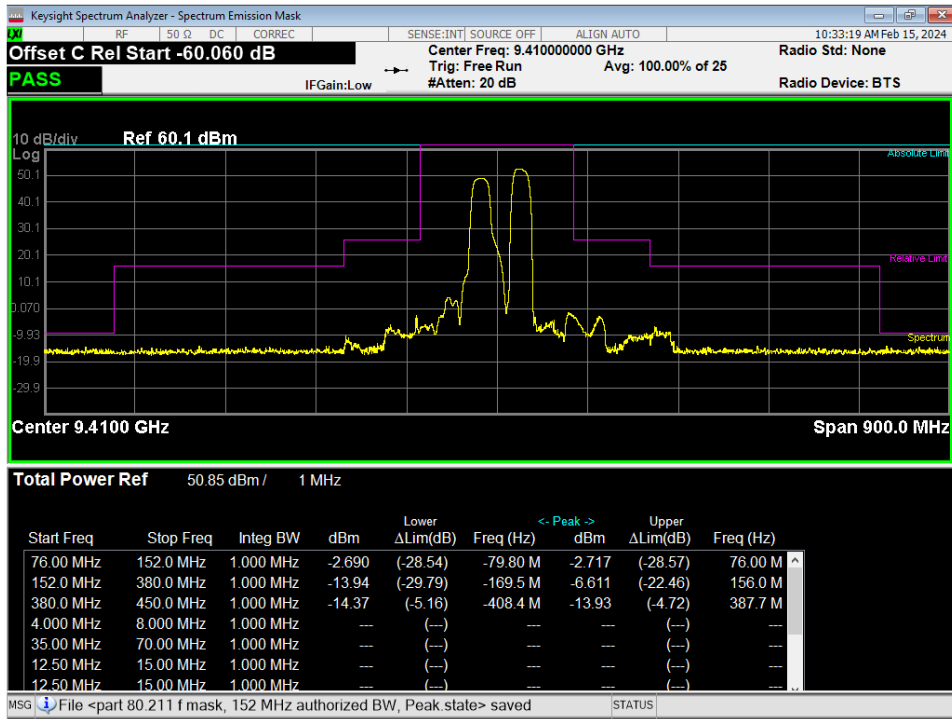


Figure 32 – Emissions Mask, Mode A, 152 MHz Authorized BW

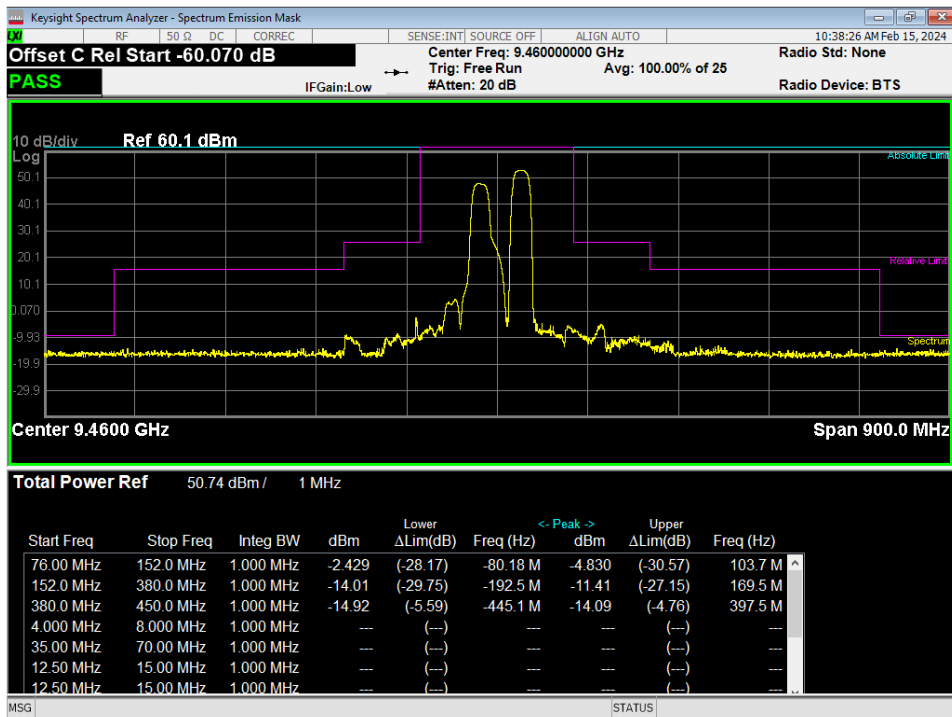


Figure 33 – Emissions Mask, Mode B, 152 MHz Authorized BW

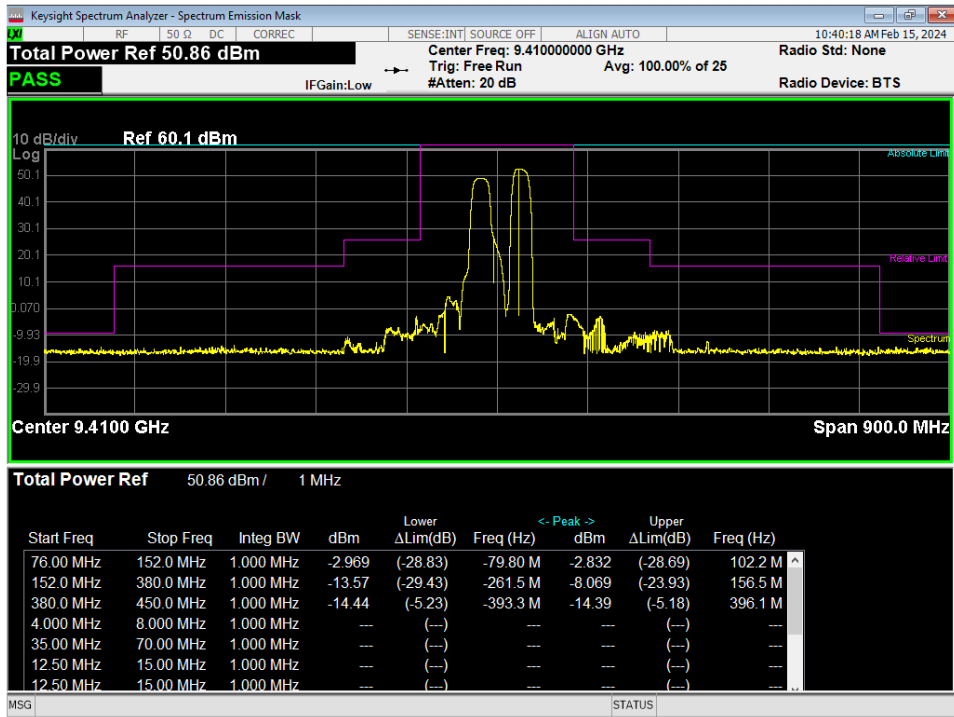


Figure 34 – Emissions Mask, Mode C, 152 MHz Authorized BW

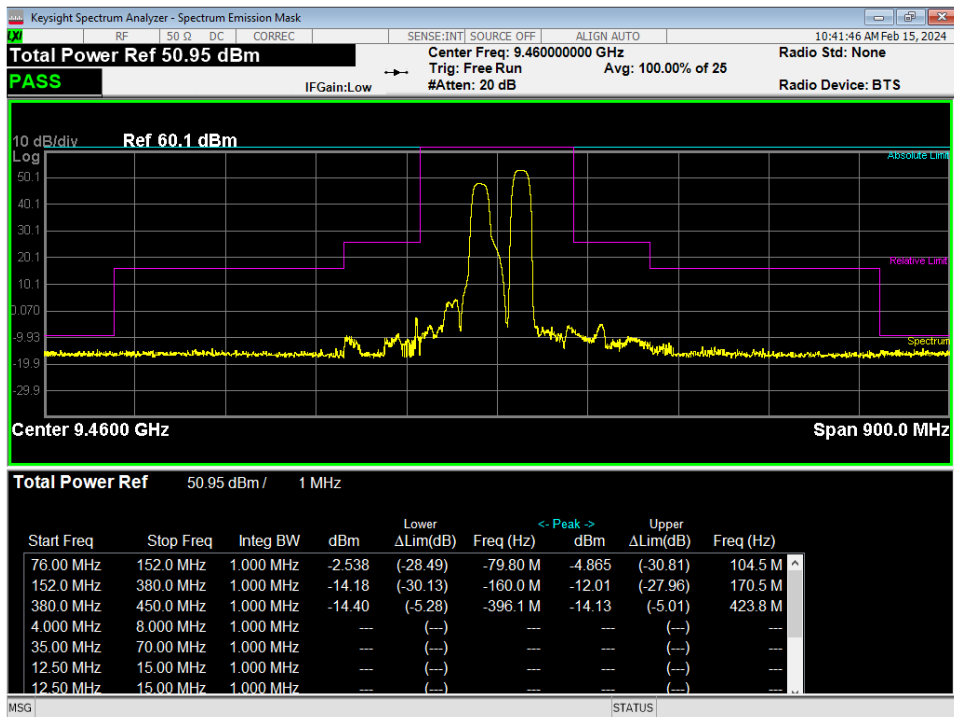


Figure 35 – Emissions Mask, Mode D, 152 MHz Authorized BW

	Report Number:	R240129-01-E1	Rev	A
	Prepared for:	Aerostar International		

4.2 OUTPUT POWER

Test Method: ANSI C63.26:
Section(s) 5.2.4.4.2

Limits of power measurements:

The transmitter power shown on the radio station authorization is the maximum power the licensee is authorized to use. Power is expressed in the following terms: For PON and F3N emission: Mean power

Test procedures:

All the measurements were done with RBW greater than OBW of the signal.

Deviations from test standard:

No deviation.

Test setup:



Figure 36 – Output Power Measurements Test Setup

EUT operating conditions:

See Section 2.1 & 2.2

Test results:

Output Power

Mode	CHANNEL FREQUENCY (MHz)	Duty Cycle Correction Factor (DCCF)	Raw Avg uncorrected level (dBm)	Corrected Avg Output Power (dBm)	Corrected Avg Output Power (W)	Method	RESULT
A-4% Duty Cycle	9410.000000	13.9794	36.87	50.85	121.6	Conducted	PASS
B-2% Duty Cycle	9410.000000	16.9897	33.87	50.86	118.6	Conducted	PASS
C-4% Duty Cycle	9460.000000	13.9794	36.76	50.74	121.9	Conducted	PASS
D-2% Duty Cycle	9460.000000	16.9897	33.96	50.95	124.4	Conducted	PASS
Duty cycle is declared by the manufacturer. Corrected Output Power = DCCF + Raw uncorrected level. Limit: 51.76dBm/150 W							

	Report Number:	R240129-01-E1	Rev	A
	Prepared for:	Aerostar International		

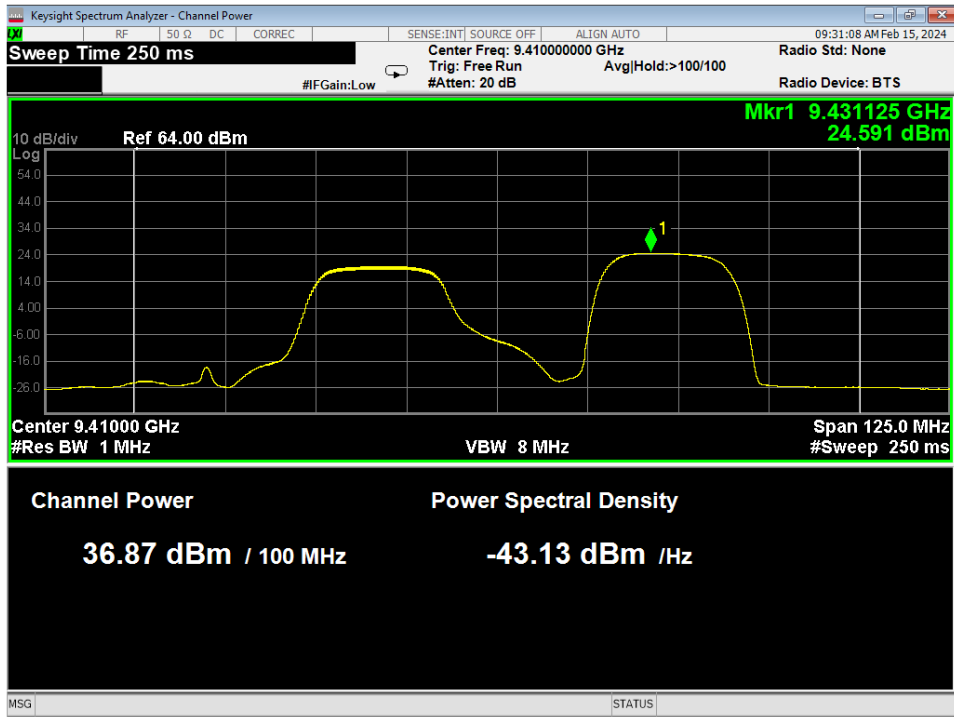


Figure 37 – Average Power, Mode A

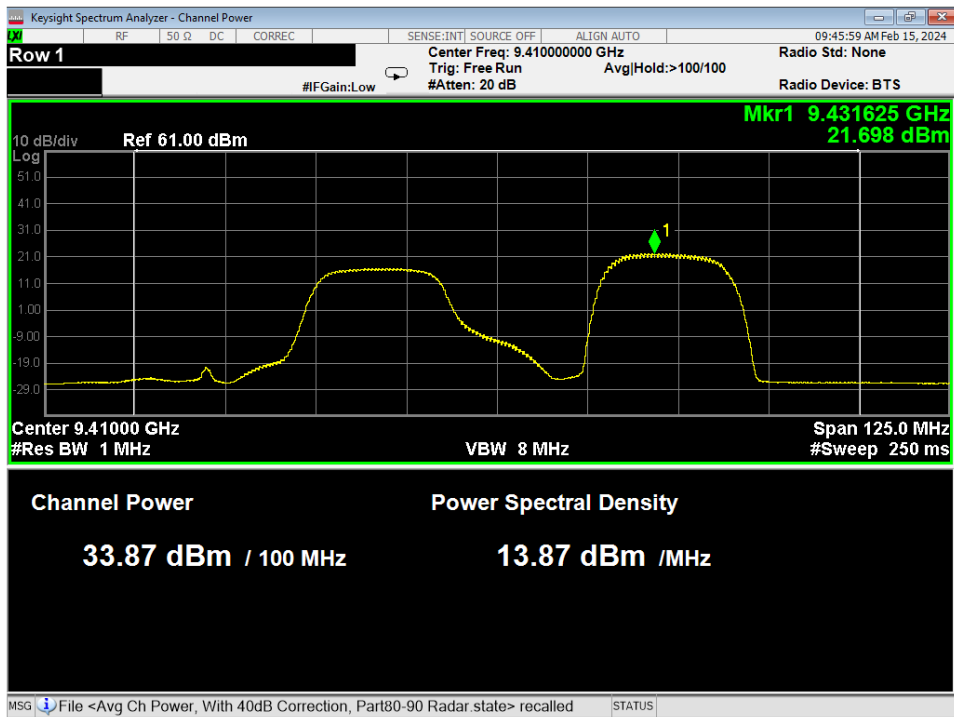


Figure 38 – Average Power, Mode B

	Report Number:	R240129-01-E1	Rev	A
	Prepared for:	Aerostar International		

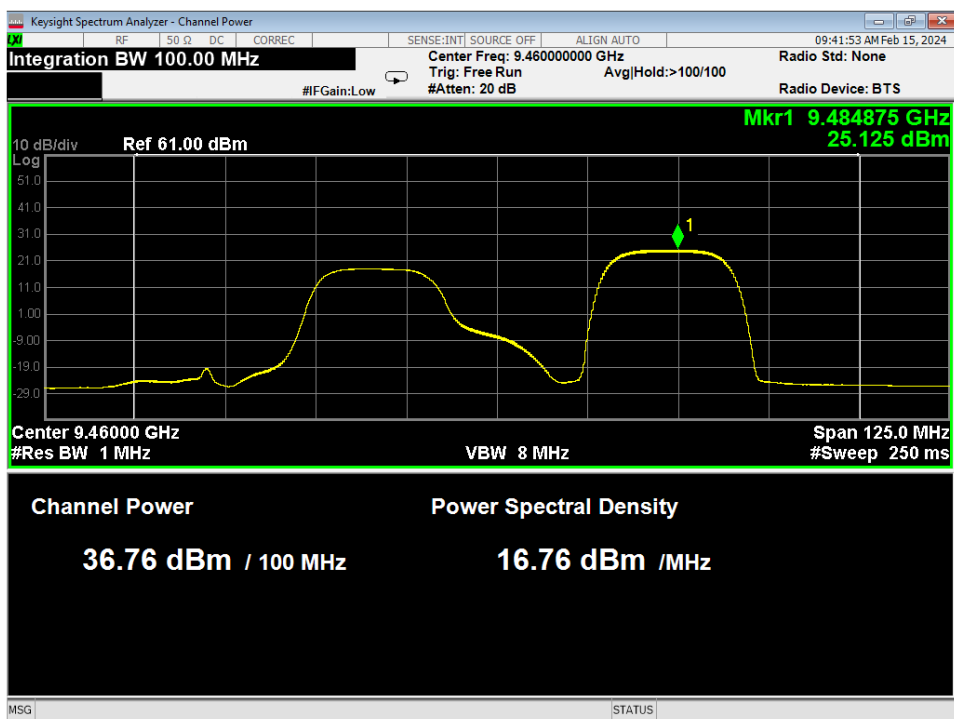


Figure 39 – Average Power, Mode C

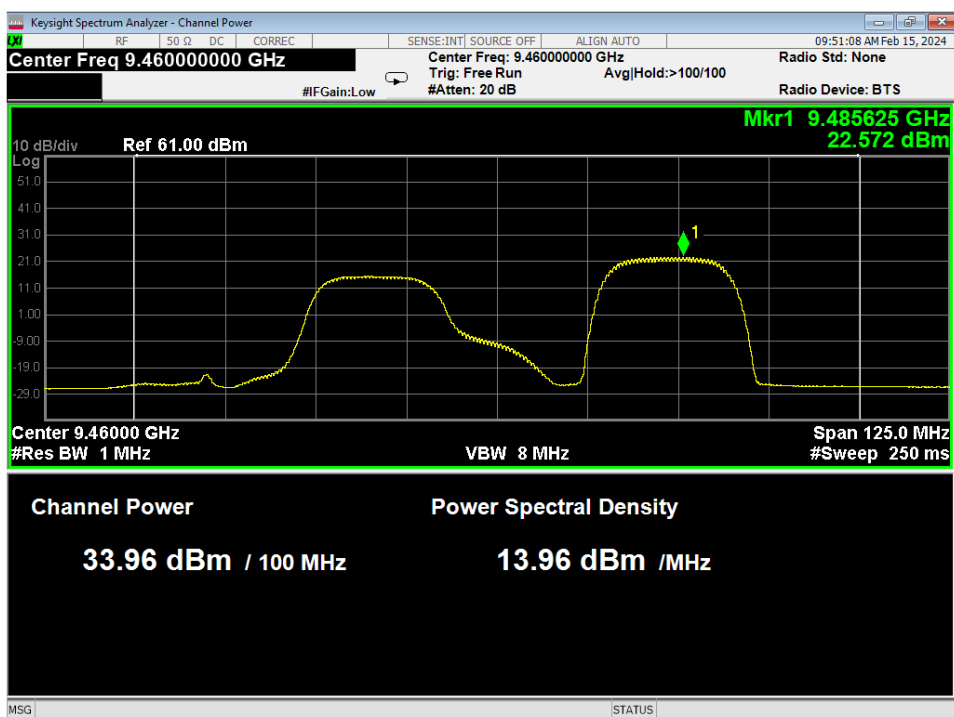


Figure 40 – Average Power, Mode D

	Report Number:	R240129-01-E1	Rev	A
	Prepared for:	Aerostar International		

4.3 BANDWIDTH AND MODULATION CHARACTERISTICS

Test Method: ANSI C63.26,
Section(s) 5.4.3, 5.4.4

Limits of bandwidth measurements:
Authorized Bandwidth is 120 MHz. Operating Range is 9410 MHz – 9463 MHz.

Limits for Modulation Characteristics:
Radar stations operating in the bands above 2.4 GHz may use any type of modulation consistent with the bandwidth requirements in § 80.209(b).

Test procedures:
The EUT was connected to the spectrum analyzer directly with a low-loss shielded coaxial cable and an attenuator to protect measurement equipment. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 1 MHz RBW and 8 MHz VBW. The bandwidth measurements were done using the automatic bandwidth measurement.

Deviations from test standard:
No deviation

Test setup:

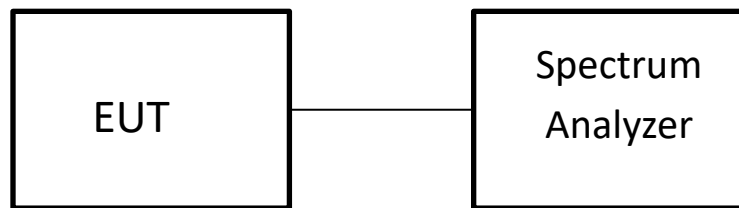


Figure 41 –Measurements Test Setup

EUT operating conditions:
See Section 2.1 & 2.2

Test results:

	Report Number:	R240129-01-E1	Rev	A
	Prepared for:	Aerostar International		

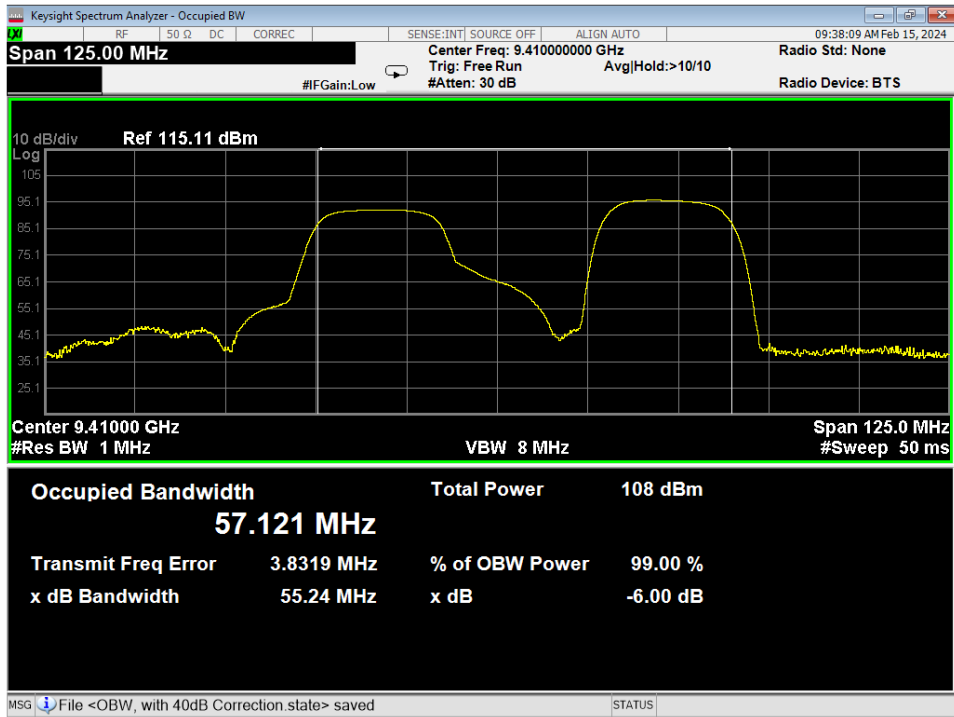


Figure 42 - 99% Occupied Bandwidth, Mode A

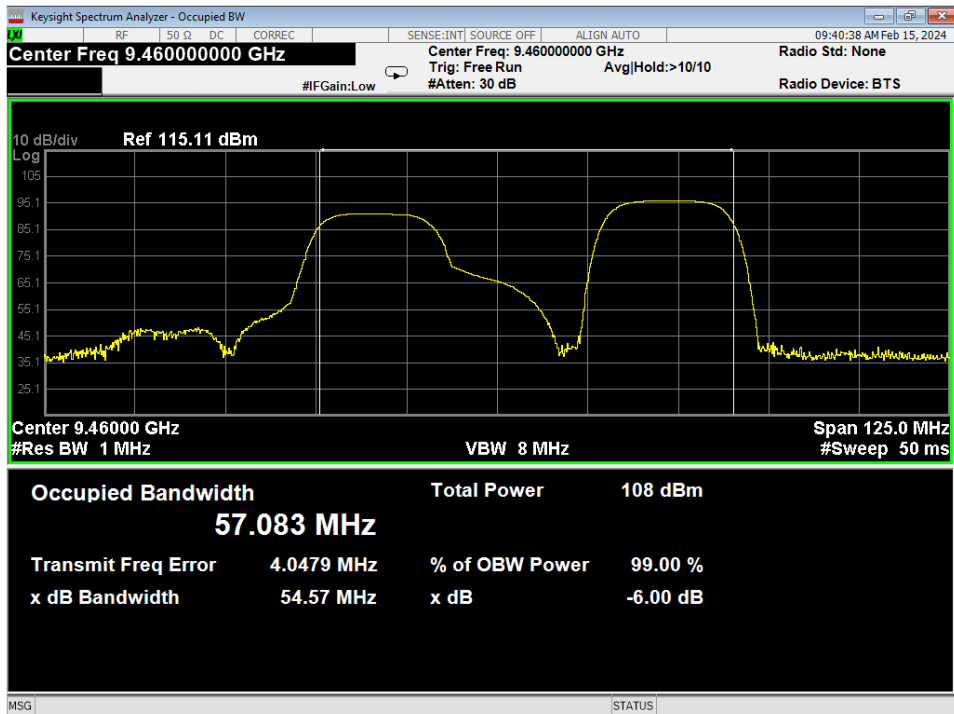


Figure 43 - 99% Occupied Bandwidth, Mode B

	Report Number:	R240129-01-E1	Rev	A
	Prepared for:	Aerostar International		

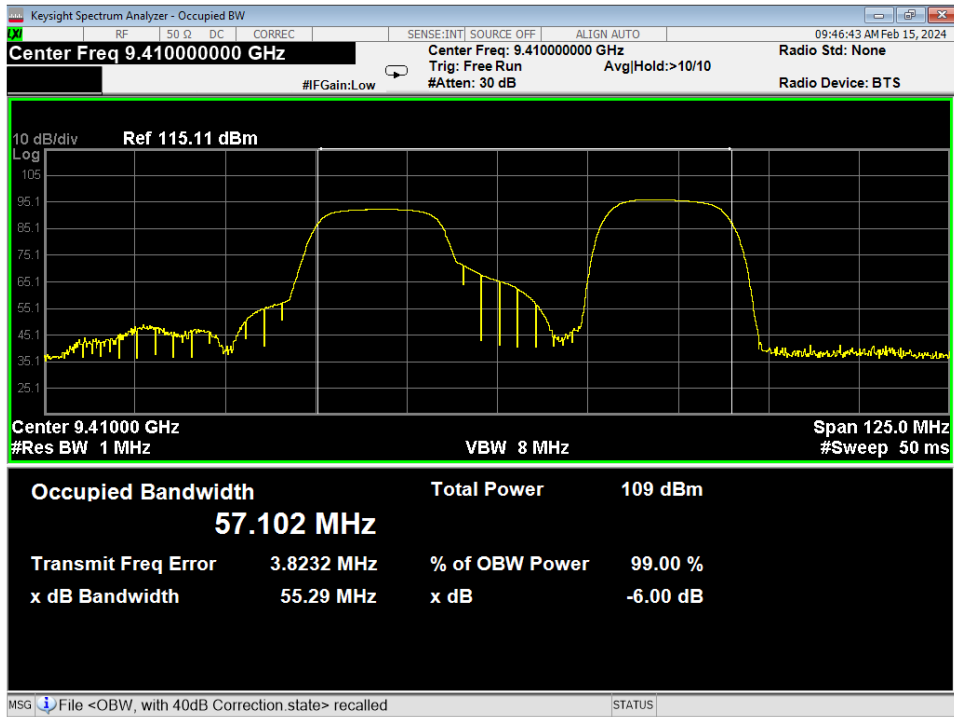


Figure 44 - 99% Occupied Bandwidth, Mode C

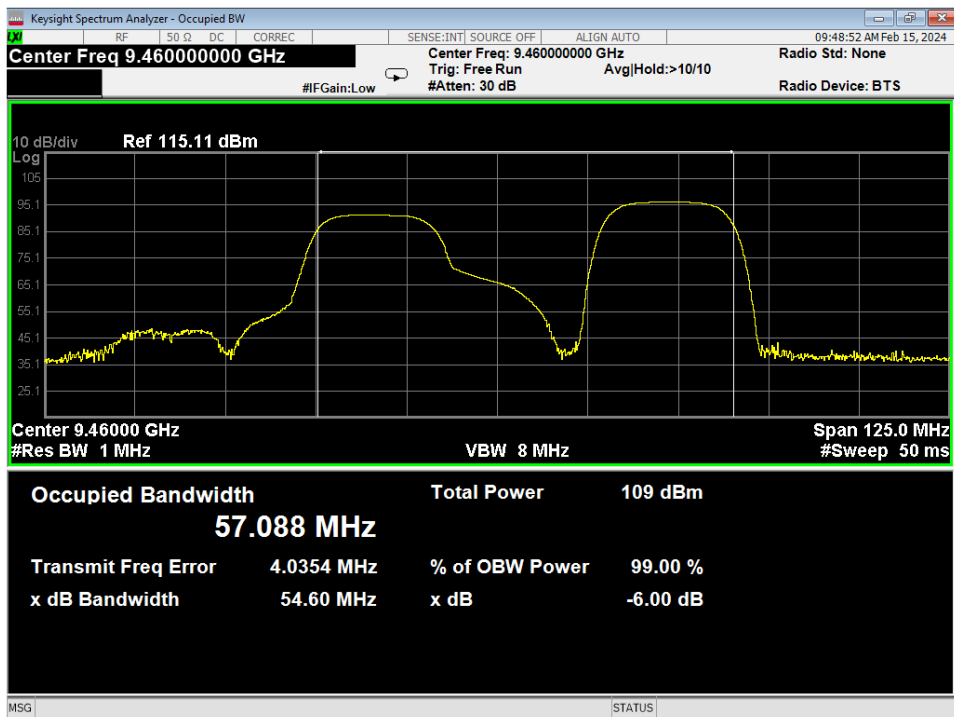


Figure 45 - 99% Occupied Bandwidth, Mode D

	Report Number:	R240129-01-E1	Rev	A
	Prepared for:	Aerostar International		

4.4 FREQUENCY STABILITY MEASUREMENTS

Test Method: ANSI C63.26,
Section(s) 5.6.3 "Procedures for frequency stability testing"

Limits:

47 CFR 80.209(b)

When pulse modulation is used in land and ship radar stations operating in the bands above 2.4 GHz the frequency at which maximum emission occurs must be within the authorized bandwidth and must not be closer than $1.5/T$ MHz to the upper and lower limits of the authorized bandwidth where "T" is the pulse duration in microseconds. In the band 14.00-14.05 GHz the center frequency must not vary more than 10 MHz from 14.025 GHz.

Test procedures:

Radiated power was measured on a spectrum analyzer with resolution bandwidth and video bandwidth set to 1 MHz and 8 MHz respectively. The frequency error functionality on the receiver was used. The temperature was varied from -30°C to +55°C.

Deviations from test standard:

No deviation

Test setup:

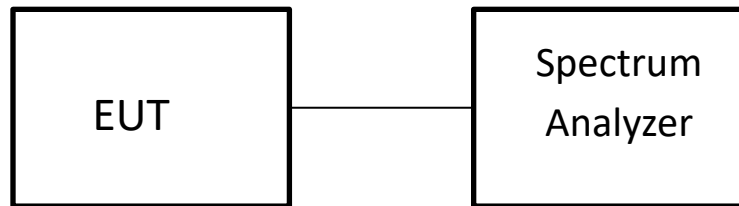


Figure 46 –Measurements Test Setup

EUT operating conditions:

See Section 2.1 & 2.2

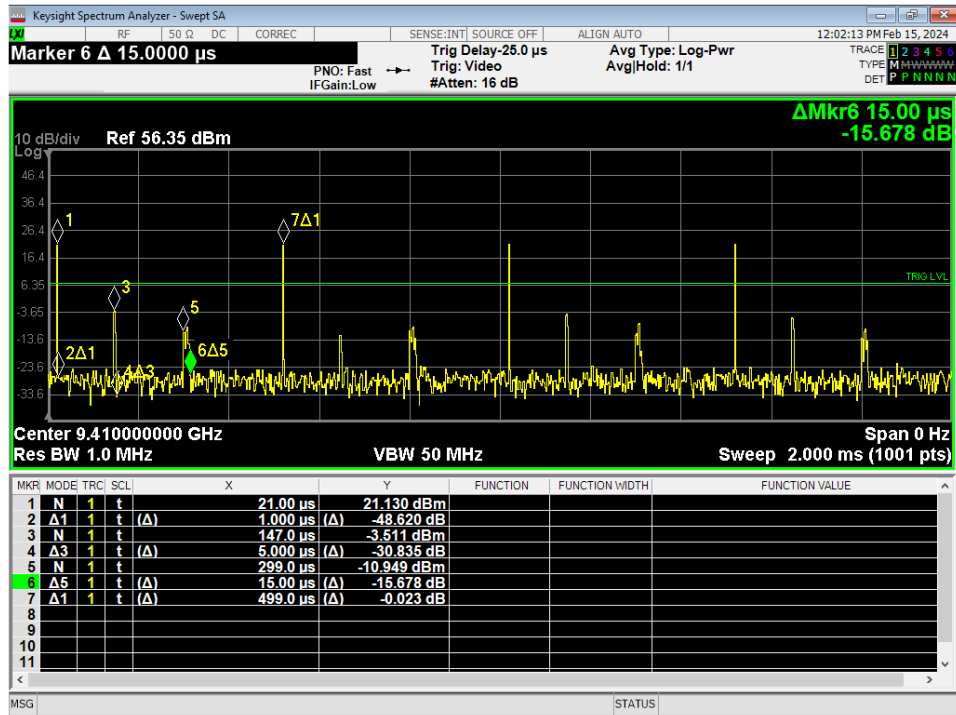


Figure 47 – Pulse length plot, shows shortest pulse length observed

$T = \text{pulse length } (\mu\text{s})$
 $1.5/T = 1.5/1 = \mathbf{1.5\text{MHz}}$
 from the edge of the authorized band

Authorized bandwidth (AB) = 152MHz
 Worst case deviation (WCD) = 4.46MHz.
 Largest OBW = 57.121MHz
 Lowest Channel = 9410MHz
 Highest Channel = 9460MHz

Device's worst-case deviation:
 $9460\text{MHz} + \frac{1}{2} \cdot \text{OBW} + (\text{WCD}) = 9493.0205\text{MHz}$
 $9410\text{MHz} - \frac{1}{2} \cdot \text{OBW} + (\text{WCD}) = 9376.9795\text{MHz}$
 +Authorized edge = 9536MHz
 -Authorized edge = 9334MHz
Margin to +Authorized edge = 9536 – 9493.0205 = 42.9795MHz

Complies

Margin to -Authorized edge = 9376.9795MHz – 9334 = 42.9795MHz

Complies

See bandwidth for plots. The device complies with frequency deviation limits.

	Report Number:	R240129-01-E1	Rev	A
	Prepared for:	Aerostar International		

Test results: Complies

Reference Freq (MHz)		9410	Mode A
Frequency error versus temperature and supply voltage			
Temperature (°C)	Frequency Error (MHz)	Error in ppm	
55	3.86	407.90	
40	3.72	393.11	
30	3.73	394.17	
20	3.82	403.68	
10	3.91	413.19	
0	3.92	414.24	
-10	4.02	424.81	
-20	4.03	425.87	
-30	3.97	419.53	
85% of nominal voltage	4.0219	425.01	
115% of nominal voltage	4.0159	424.38	
Nominal voltage (28VDC)	4.0082	423.57	

Reference Freq (MHz)		9410
Cold Start from first ability to activate transmission (-30C)		
power on to ability to transmit due to software (Seconds)		182
Minutes after ability to Transmit	Frequency Error (MHz)	Error in ppm
0 Min(s)	3.95	417.42
1 Min(s)	3.96	418.47
2 Min(s)	3.96	418.47
3 Min(s)	3.97	419.53
4 Min(s)	3.97	419.53
5 Min(s)	3.97	419.53

	Report Number:	R240129-01-E1	Rev	A
	Prepared for:	Aerostar International		

Reference Freq (MHz)		9460
Frequency error versus temperature and supply voltage		
Temperature (°C)	Frequency Error (MHz)	Error in ppm
55	4.22	445.95
40	4.21	444.89
30	4.24	448.06
20	4.25	449.12
10	4.24	448.06
0	4.29	453.34
-10	4.31	455.46
-20	4.36	460.74
-30	4.46	471.31
85% of nominal voltage	4.1513	438.69
115% of nominal voltage	4.1417	437.67
Nominal voltage (28VDC)	4.1433	437.84

Mode B

Reference Freq (MHz)		9460
Cold Start from first ability to activate transmission (-30C)		
power on to ability to transmit due to software (Seconds)		182
Minutes after ability to Transmit	Frequency Error (kHz)	Error in ppm
0 Min(s)	4.63	489.27
1 Min(s)	4.61	487.16
2 Min(s)	4.62	488.22
3 Min(s)	4.6	486.10
4 Min(s)	4.6	486.10
5 Min(s)	4.61	487.16

	Report Number:	R240129-01-E1	Rev	A
	Prepared for:	Aerostar International		

APPENDIX A: SAMPLE CALCULATION

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - (-CF + AG) + AV$$

FS = Field Strength
 RA = Receiver Amplitude
 AF = Antenna Factor
 CF = Cable Attenuation Factor
 AG = Amplifier Gain
 AV = Averaging Factor (if applicable)

Assume a receiver reading of 55 dB μ V is obtained. The Antenna Factor of 12 and a Cable Factor of 1.1 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB μ V/m.

$$FS = 55 + 12 - (-1.1 + 20) + 0 = 48.1 \text{ dB}\mu\text{V/m}$$

The 48.1 dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm} [(48.1 \text{ dB}\mu\text{V/m})/20] = 254.1 \mu\text{V/m}$$

AV is calculated by the taking the $20 \cdot \log(T_{on}/100)$ where T_{on} is the maximum transmission time in any 100ms window.

EIRP Calculations

In cases where direct antenna port measurement is not possible or would be inaccurate, output power is measured in EIRP. The maximum field strength is measured at a specified distance and the EIRP is calculated using the following equation;

$$EIRP \text{ (Watts)} = [\text{Field Strength (V/m)} \times \text{antenna distance (m)}]^2 / 30$$

$$\text{Power (watts)} = 10^{[\text{Power (dBm)}]/10} / 1000$$

$$\text{Voltage (dB}\mu\text{V)} = \text{Power (dBm)} + 107 \text{ (for } 50\Omega \text{ measurement systems)}$$

$$\text{Field Strength (V/m)} = 10^{[\text{Field Strength (dB}\mu\text{V/m)} / 20]} / 10^6$$

$$\text{Gain} = 1 \text{ (numeric gain for isotropic radiator)}$$

$$\text{Conversion from 3m field strength to EIRP (d=3):}$$

$$EIRP = [FS(\text{V/m}) \times d^2]/30 = FS [0.3] \quad \text{for } d = 3$$

$$EIRP(\text{dBm}) = FS(\text{dB}\mu\text{V/m}) - 10(\log 10^9) + 10\log[0.3] = FS(\text{dB}\mu\text{V/m}) - 95.23$$

$10\log(10^9)$ is the conversion from micro to milli

	Report Number:	R240129-01-E1	Rev	A
	Prepared for:	Aerostar International		

APPENDIX B – MEASUREMENT UNCERTAINTY

NCEE Labs does not add uncertainty to levels

Where relevant, the following measurement uncertainty levels have been for tests performed in this test report:

Test	Frequency Range	Uncertainty Value (dB)
Radiated Emissions, 3m	30MHz - 1GHz	±4.31
Radiated Emissions, 3m	1GHz - 18GHz	±5.08

Expanded uncertainty values are calculated to a confidence level of 95%.

	Report Number:	R240129-01-E1	Rev	A
	Prepared for:	Aerostar International		

REPORT END