

Milo2 Wall Washing Track Light
US Version Installation Manual



Please follow the sequence of installation step by step.
Switch off the electricity before commencing installation



Wall Washing Track Light

unit: mm

Table with 3 columns: Part, Dimension, Value. Rows include L1 (318), W1 (52), H1 (162), L2 (170), W2 (34), H2 (50).

For specific operational diagrams, either download from our website or contact the technical support team.
https://www.kinglumi.com/





APP Download




Recommended installation

Rotation and tilt

3wire1circuit

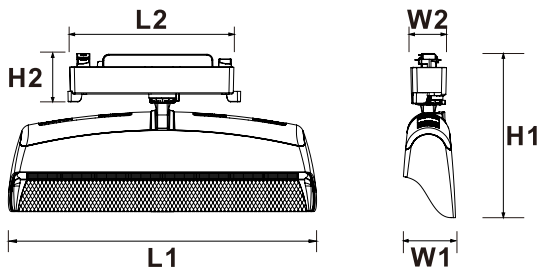


45W

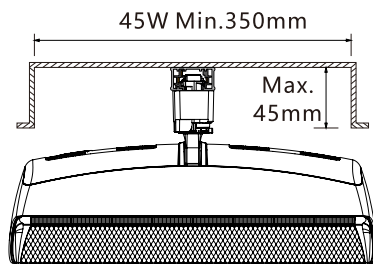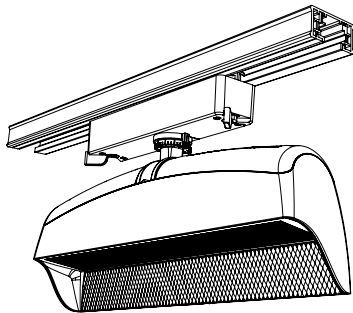


A1




0~360°Rotation

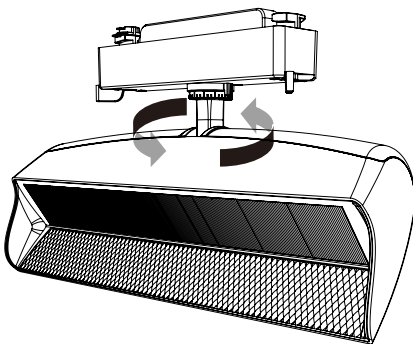



0~90°Rotation






A2

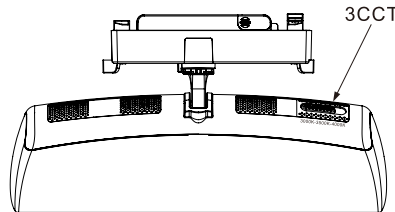

A3

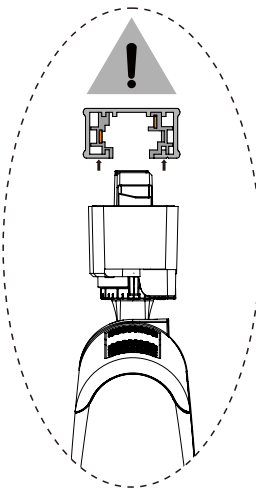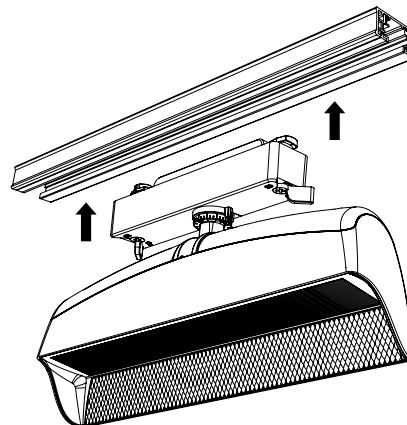

A4

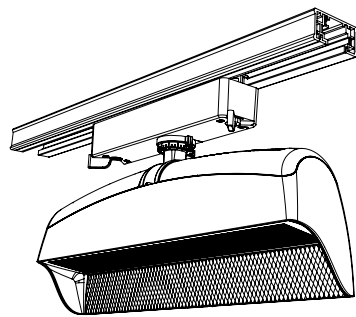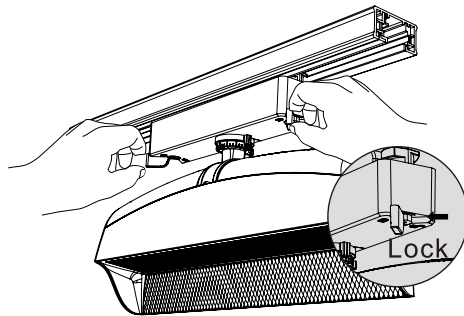

Insert adapter into track channel, lock spring latches (audible click) or turn screws 90° clockwise with flat-head screwdriver, then confirm pad-to-rail contact for power continuity.

A5





Please turn off the power before rotating the track light.

When rotate the lamp to the stop position, do not continue to rotate in the same direction.



It is recommended to install it on the ceiling, and it is prohibited to install it on the side walls and floor.

1 Unlock

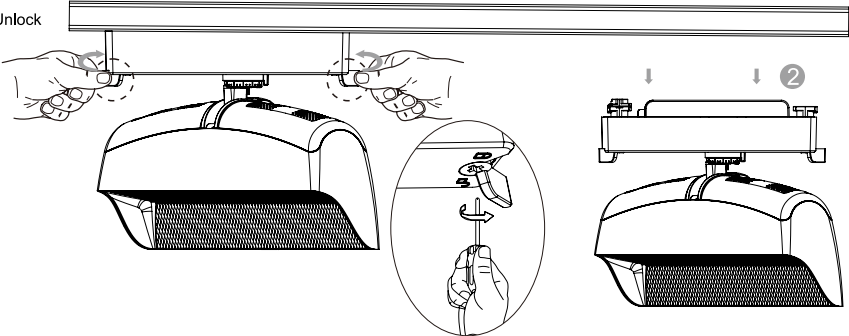

Don't touch the luminaires when turned on.

Product lifetime refers to the duration during which more than 50% of the luminaires maintain over 70% of initial luminous flux (L70B50).

- 1. The luminaires should be installed or replaced by a licensed electrician and in accordance with local regulation.
- 2. Please read the instruction before installation.
- 3. Please turn off the power before installation.
- 4. Avoid storing and using luminaires in corrosive environments or environments containing harmful substances such as sulfides, halides, phthalates, etc.
- 5. Bluetooth, Wi-Fi and other wireless signal communications are easily interfered by strong external radio or metal shielding, so don't install the luminaires on metal ceiling or ceiling that contains metal shielding materials, because the Bluetooth signal will attenuate and fail to connect.



FCC Statements

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The devices must be installed and used in strict accordance with the manufacturer's instructions as described in the user documentation that comes with the product.

This product must be installed and operated with a minimum distance of 20 cm between the radiator and user body.