TEST REPORT

Applicant:	Bigme Cloud Literacy Technology Co., Ltd.
Address of Applicant:	01 18F.,COFCO PROPERTY TOWER,BAOMIN NO.1RD.,BAO AN 3RD DISTRICT,SHENZHEN, CHINA
Manufacturer	Bigme Cloud Literacy Technology Co., Ltd.
Address of Manufacturer:	01 18F.,COFCO PROPERTY TOWER,BAOMIN NO.1RD.,BAO AN 3RD DISTRICT,SHENZHEN, CHINA
Factory:	Shenzhen GuoYue Network Technology Co., LTD
Address of Factory:	7 floors, Building 6, Rundongsheng Industrial Zone, Longteng Community, Xixiang Street, Bao'an District, Shenzhen
Product Name:	ePaper Monitor
Model No.:	B251,B251 Lite,B251 Plus,B251+,B251 Max,B251 Pro,B251C, B251C Lite,B251C Plus,B251C+,B251C Max,B251C Pro,B251 Color, B251 Color Lite,B251 Color Plus,B251 Color+ ,B251 Color Max, B251 Color Pro,B252,B252 Lite,B252 Plus,B252+,B252 Max, B252 Pro,B252C,B252C Lite,B252C Plus,B252C+,B251C Max, B252C Pro,B252 Color,B252 Color Lite,B252 Color Plus,B252 Color+ , B252 Color Max,B252 Color Pro
Trade Mark:	Bigme
FCC ID:	2A8EM-B251
Applicable standards:	FCC CFR Title 47 Part 15 Subpart E Section 15.407
Date of Test:	Mar.15, 2025-Mar.25, 2025
Date of report issued:	Mar.25, 2025

Remark:

The results shown in this test report refer only to the sample(s) tested , this test report cannot be reproduced, except in full without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver

Prepared By

Shenzhen ETR Standard Technology Co., Ltd.

Address: No.103, No.10, Phase I, Zone 3, Xinxing Industrial Park, Xinhe, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Compiled by:	Reviewed by:	Approved by:
Project Engineer	Project Manager	Authorized Signature

This test report is valid for the tested samples only. It cannot be reproduced except in full without prior written consent of Shenzhen ETR Standard Technology Co., Ltd.

Report Revision History		
Report No.	Description	Issue Date
ET-25030692E02	Original	Mar.25, 2025

Contents

Page

1 TEST SUMMARY 4

1.1 MEASUREMENT UNCERTAINTY 4

2 GENERAL INFORMATION 5

2.1 GENERAL DESCRIPTION OF EUT 5
2.2 TEST MODE 7
2.3 DESCRIPTION OF SUPPORT UNITS 8
2.4 DEVIATION FROM STANDARDS 8
2.5 ABNORMALITIES FROM STANDARD CONDITIONS 8
2.6 TEST FACILITY 8
2.7 TEST LOCATION 8
2.8 ADDITIONAL INSTRUCTIONS 8

3 TEST INSTRUMENTS LIST 9

4 TEST RESULTS AND MEASUREMENT DATA 10

4.1 ANTENNA REQUIREMENT 10
4.2 CONDUCTED EMISSIONS 11
4.3 DUTY CYCLE 14
4.4 CONDUCTED OUTPUT POWER 18
4.5 BANDWIDTH &99% OCCUPY BANDWIDTH 20
4.6 POWER SPECTRAL DENSITY 28
4.7 BAND EDGE 35
4.7.1 Conducted test Method 35
4.8 SPURIOUS EMISSION 39
4.8.1 Radiated Emission Method 39
4.8.2 Conducted Emission Method 49
4.9 FREQUENCY STABILITY 54

5 TEST SETUP PHOTO 58

6 EUT CONSTRUCTIONAL DETAILS 58

1 Test Summary

Test Item	Section in CFR 47	Result	Test by
Antenna requirement	15.203	Pass	/
AC Power Line Conducted Emission	15.207	Pass	Jason Huang
Conducted Output Power	15.407 (a)(1)/(a)(3)	Pass	Kara Wu
26dB Bandwidth and 99% Occupied Bandwidth	15.407 (a)(12)	Pass	Kara Wu
6dB Bandwidth	15.407 (e)	Pass	Kara Wu
Power Spectral Density	15.407(a)(1)/(a)(3)	Pass	Kara Wu
Band Edge	15.407(b)(1)/(b)(4)	Pass	Kara Wu
Spurious Emission	15.205/15.209 15.407(b)(1)/(b)(4)/(b)(8)	Pass	Jason Huang
Frequency Stability	15.407(g)	Pass	Kara Wu

Remarks:

1. *Pass: The EUT complies with the essential requirements in the standard.*
2. *Test according to ANSI C63.10:2013*
3. *Note: Compliance determination rules*

1).The Compliance determination of test results does not take into account measurement uncertainty. Measurement results are determined based on regulatory limitations or requirements specified by the applicant/manufacturer. If measurement uncertainty is taken into account, the applicant/manufacturer will bear all possible risks of non-compliance.

2).The measurement uncertainty please refer to each test result in the "Measurement Uncertainty"

1.1 Measurement Uncertainty

Test Item	Measurement Uncertainty	Notes
Occupied Channel Bandwidth	0.55%	(1)
RF output power, conducted	±0.57 dB	(1)
Power Spectral Density, conducted	±0.61 dB	(1)
Unwanted Emissions, conducted	±0.64 dB	(1)
AC Power Line Conducted Emission	± 2.55 dB	(1)
Radiated emissions 9K-30MHz	±3.79 dB	(1)
Radiated emissions 30M- 1GHz	± 4.24 dB	(1)
Radiated emissions 1GHz-18GHz	± 4.26 dB	(1)
Radiated emissions 18GHz-40GHz	±4.17 dB	(1)
Frequency error	Uc=1X10-7	(1)
Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.		

2 General Information

2.1 General Description of EUT

Product Name:	ePaper Monitor
Model No.:	B251,B251 Lite,B251 Plus,B251+,B251 Max,B251 Pro,B251C, B251C Lite,B251C Plus,B251C+,B251C Max,B251C Pro,B251 Color, B251 Color Lite,B251 Color Plus,B251 Color+ ,B251 Color Max, B251 Color Pro,B252,B252 Lite,B252 Plus,B252+,B252 Max, B252 Pro,B252C,B252C Lite,B252C Plus,B252C+,B251C Max, B252C Pro,B252 Color,B252 Color Lite,B252 Color Plus, B252 Color+ ,B252 Color Max,B252 Color Pro
Difference of model(s)	All models have the same circuit and RF module, except for the model name and color.
Test Model:	B251
Hardware Version:	N/A
Software Version:	N/A
Sample(s) Status:	Engineer sample
Operation Frequency:	☒5180-5240MHz for 802.11a/n(HT20)/ac20; ☒5745-5825 MHz for 802.11a/n(HT20)/ac20;
Channel numbers:	☒4 channels for 802.11a/n20/ac20 in the 5180-5240MHz band; ☒5 channels for 802.11a/n20/ac20 in the 5745-5825MHz band ;
Channel bandwidth:	802.11a/802.11n(HT20)/ 802.11ac(VHT20): 20MHz
Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20):MCS0-MCS15; 802.11ac(VHT/20):NSS1, MCS0-MCS9
Modulation technology:	Orthogonal Frequency Division Multiplexing (OFDM) with BPSK/QPSK/16QAM/
Antenna Type:	FPCB antenna
Antenna gain:	4.02dBi (Note: Antenna information is provided by applicant, Testing lab is not responsible for the accuracy of the information.)
Battery	N/A
Power supply:	DC 12V From Adapter
Adapter Model:	Model: KA65E-1205000Q Input:AC 100-240V 50/60Hz Output: DC 12V 5A

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180MHz	38	5190MHz	40	5200MHz	42	5210MHz
44	5220MHz	46	5230MHz	48	5240MHz	/	/
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
149	5745MHz	151	5755MHz	153	5765MHz	155	5775MHz
157	5785MHz	159	5795MHz	161	5805MHz	/	/
165	5825MHz	/					

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	**Frequency (MHz)**		
	802.11 a /n(HT20)/ac(VHT20)	802.11 n(HT40)/ac(VHT40) /ax(HE20)	802.11ac(VHT80) /ax(HE80)
Lowest channel	5180	/	/
Middle channel	5200		
Highest channel	5240	/	

Test channel	**Frequency (MHz)**		
	802.11 a /n(HT20)/ac(VHT20)	802.11 n(HT40)/ac(VHT40) /ax(HE20)	802.11ac(VHT80) /ax(HE80)
Lowest channel	5745	/	/
Middle channel	5785		
Highest channel	5825	/	

2.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode(or with a duty cycle ≥ 98%)

Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Pretest Mode	Description
Mode 1	802.11a / n 20/ac 20 CH36/ CH40/ CH 48 802.11a / n 20/ac 20 CH149/ CH157/ CH 165
Mode 2	/
Mode 3	/
Mode 4	/
Mode 5	Link Mode

Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11a / n 20/ac 20 CH36/ CH40/ CH 48 802.11a / n 20/ac 20 CH149/ CH157/ CH 165
Mode 2	/
Mode 3	/
Mode 4	/

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

2.3 Description of Support Units

No.	Description	Manufacturer	Model	Serial Number
1	Notebook computer	DELL	Vostro 3520	/

2.4 Deviation from Standards

None.

2.5 Abnormalities from Standard Conditions

None.

2.6 Test Facility

Test laboratory:	Shenzhen ETR Standard Technology Co., Ltd.
CNAS Registration Number:	L11864
A2LA Certificate Number:	6640.01
FCC Designation Number:	CN1326
FCC Test Firm Registration:	183064

2.7 Test Location

All tests were performed at:	
Laboratory location:	No.103, No.10, Phase I, Zone 3, Xinxing Industrial Park, Xinhe, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	+86 755 85259392

2.8 Additional Instructions

Test Software	ADB serial port command
Power level setup	Default

3 Test Instruments list

Conducted Emission

Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	EMI Test Receiver	Rohde&schwarz	ESCI3	100605	2025.3.06	2026.3.05
2	Artificial power network	schwarabeck	NSLK8127	8127483	2025.3.06	2026.3.05
3	Artificial power network	ETS	3186/2NM	1132	2025.3.06	2026.3.05
4	10dB attenuator	HUBER+SUHNER	10dB	/	2025.3.06	2026.3.05
5	Cable 4	HUBER SUNNER	3M	/	2025.3.06	2026.3.05
6	Absorbing Clamp	schwarabeck	MDS21	D69250	2025.3.06	2026.3.05

Radiated Emission &RF Conducted test:

Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101032	2025.3.06	2026.3.05
2	Broadband antenna	schwarabeck	VULB9168	1064	2024.3.19	2026.3.21
3	Horn antenna	schwarabeck	BBHA9120D	9120D-1145	2024.3.19	2026.3.21
4	Amplifier	EMtrace	RP01A	50117	2025.3.06	2026.3.05
5	Amplifier	Space-Dtronics	EWLAN0118G-P40	19113001	2025.3.06	2026.3.05
6	Spectrum analyzer	KEYSIGHT	N9020A	MY55370280	2025.3.06	2026.3.05
7	Power detector meter	MWRFtest	MW100-PSB	MW201020JYT	2025.3.06	2026.3.05
8	Signal generator	Agilent	N5182A	MY49060455	2025.3.06	2026.3.05
9	Spectrum analyzer	Rohde&schwarz	FSU40	1166.1660K43	2025.3.06	2026.3.05
10	Amplifier	SKET	LNPA_1840-50	SK2019040302	2025.3.06	2026.3.05
11	Horn antenna	schwarabeck	BBHA 9170	946	2024.3.19	2026.3.21
12	Loop antenna	schwarabeck	FMZB 1519 B	1519	2024.3.19	2026.3.21
13	Cable 6	HUBER SUNNER	0.5M	/	2025.3.06	2026.3.05
14	Cable7	HUBER SUNNER	2.0M	/	2025.3.06	2026.3.05
15	Cable8	HUBER SUNNER	6.0M	/	2025.3.06	2026.3.05
16	Filter	Xin bo	XBLBQ-GTA29	210410-3-2	2025.3.06	2026.3.05
17	Power meter	Rohde&Schwarz	NRP-Z11	1138.3004.02-117725-vh	2025.3.06	2026.3.05
18	Temp. & Humidity Chamber	Jiecheng Instrument	QA-LP-80	20160705001	2025.3.06	2026.3.05

Note: the calibration interval of the above test instruments is 12 or 24 months and the calibrations are traceable to international system unit (SI).

Software Name	Manufacturer	Model	Version
RF test software	MWRFtest	MTS 8310	V2.0.0.0
Conducted test software	EZ-EMC	Farad	Ver.EMC-CON 3A1.1
Radiated test software	EZ-EMC	Farad	Ver.FA-03A2 RE

4 Test results and Measurement Data

4.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: *An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.*	
E.U.T Antenna:	
The antennas are FPCB Antenna, the best case gain of the antennas are 4.02dBi, reference to the appendix II for details	

4.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Class / Severity:	Class B
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto
Limit:	

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

Test setup:

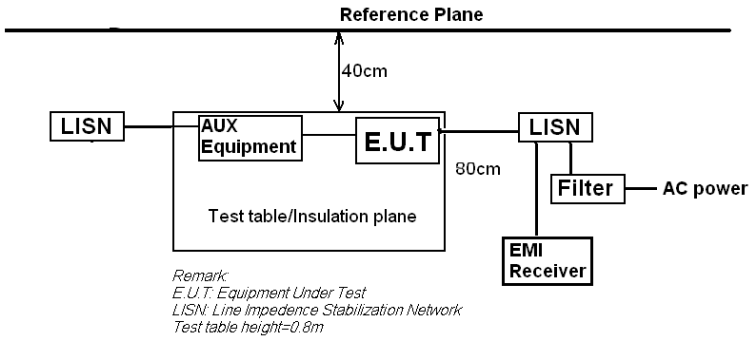

Test procedure:

1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.
2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).
3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.

Test Instruments:	Refer to section 3.0 for details					
Test mode:	Refer to section 2.2 for details					
Test environment:	Temp.:	23.8°C	Humid.:	39%	Press.:	1012mbar
Test voltage:	DC 12V From Adapter					
Test results:	Pass					

Remark:
1. Both high voltage and low voltage have been tested, and the report only shows the worst case data with AC 120V/60Hz.
2. All mode have been tested, the report only shows the worst mode (802.11ac20 5180MHz)

Measurement Result

Line:

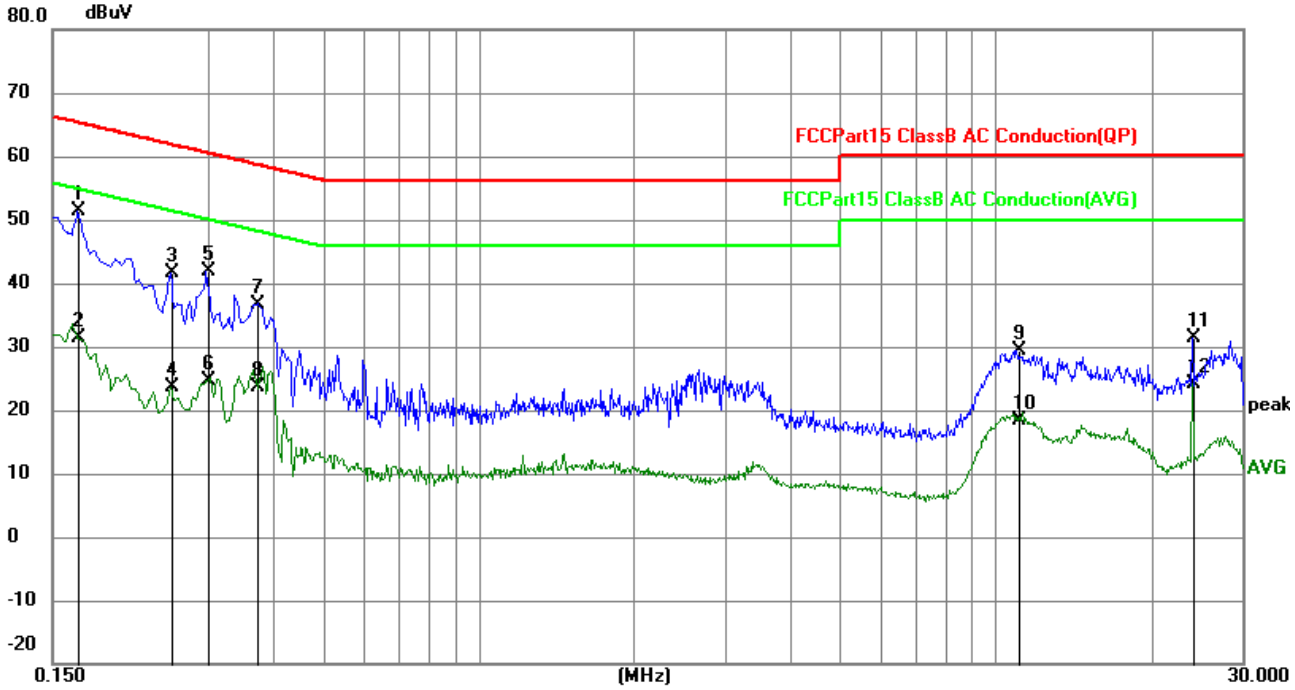

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1680	41.55	9.81	51.36	65.06	-13.70	QP
2	0.1680	21.54	9.81	31.35	55.06	-23.71	AVG
3	0.2535	31.83	9.83	41.66	61.64	-19.98	QP
4	0.2535	13.69	9.83	23.52	51.64	-28.12	AVG
5	0.2987	32.00	9.84	41.84	60.28	-18.44	QP
6	0.2987	14.86	9.84	24.70	50.28	-25.58	AVG
7	0.3751	26.86	9.89	36.75	58.39	-21.64	QP
8	0.3751	13.63	9.89	23.52	48.39	-24.87	AVG
9	11.0444	19.60	9.82	29.42	60.00	-30.58	QP
10	11.0444	8.64	9.82	18.46	50.00	-31.54	AVG
11	24.0315	21.83	9.60	31.43	60.00	-28.57	QP
12	24.0315	14.49	9.60	24.09	50.00	-25.91	AVG

Neutral:

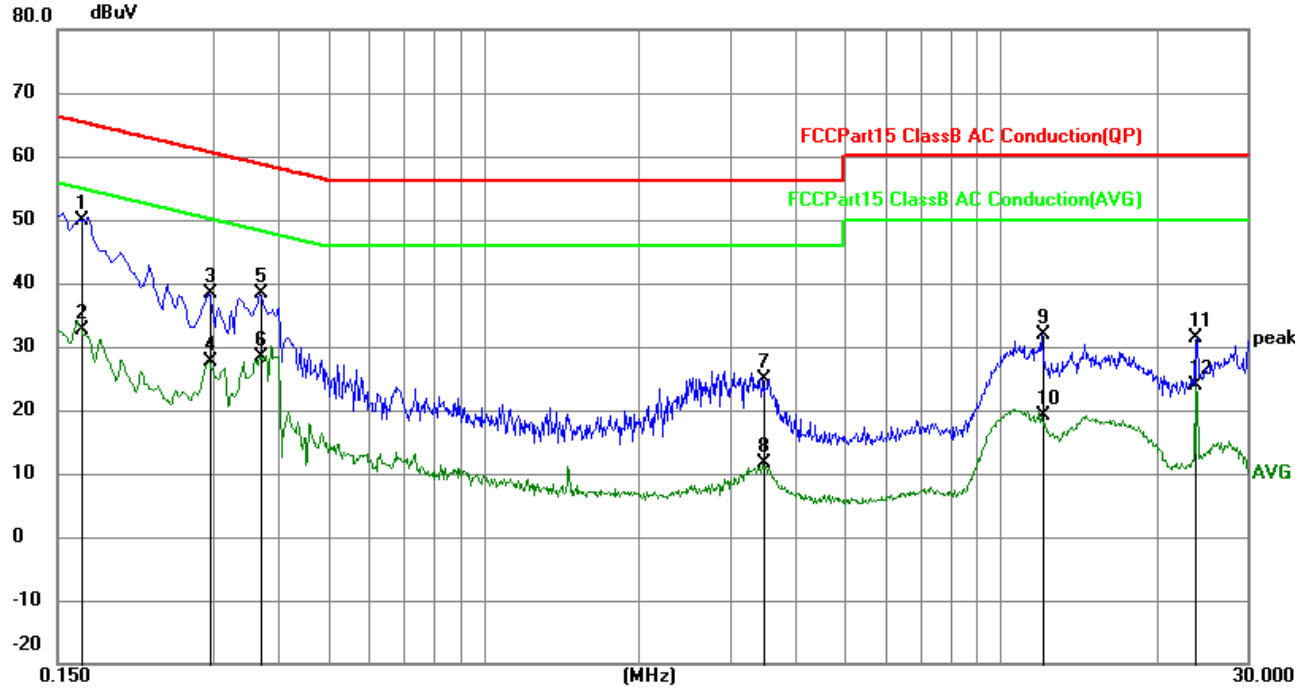

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1667	40.00	9.80	49.80	65.12	-15.32	QP
2	0.1667	22.76	9.80	32.56	55.12	-22.56	AVG
3	0.2940	28.56	9.84	38.40	60.41	-22.01	QP
4	0.2940	17.85	9.84	27.69	50.41	-22.72	AVG
5	0.3704	28.45	9.89	38.34	58.49	-20.15	QP
6	0.3704	18.55	9.89	28.44	48.49	-20.05	AVG
7	3.4890	15.15	9.84	24.99	56.00	-31.01	QP
8	3.4890	1.90	9.84	11.74	46.00	-34.26	AVG
9	12.0120	22.03	9.81	31.84	60.00	-28.16	QP
10	12.0120	9.23	9.81	19.04	50.00	-30.96	AVG
11	23.8154	21.74	9.60	31.34	60.00	-28.66	QP
12	23.8154	14.34	9.60	23.94	50.00	-26.06	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss
4. *If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.*

4.3 Duty cycle

Test Method :	ANSI C63.10:2013	
Limit:	/	
Test setup:	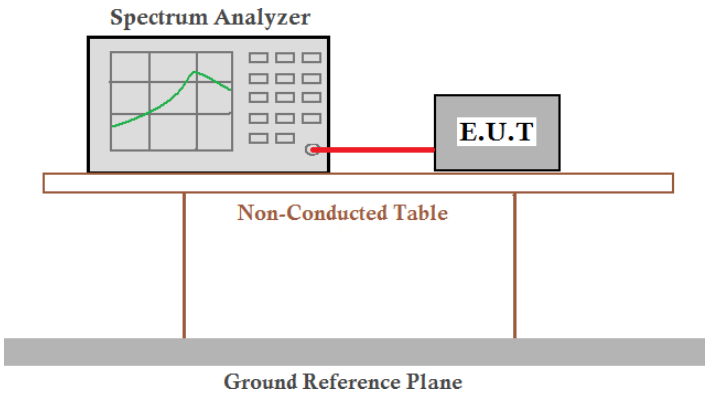	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 23.00°C	Humid.: 46%RH
Test voltage:	DC 12V From Adapter	
Test results:	Pass	

Measurement Result

5180-5240MHz

Mode	Duty cycle (%)	Correction Factor (dB)
TX 802.11a Mode	82.87	0.82
TX 802.11n20 Mode	84.67	0.72
TX 802.11ac20 Mode	84.35	0.74

5745-5825 MHz

Mode	Duty cycle (%)	Correction Factor (dB)
TX 802.11a Mode	98.08	0.08
TX 802.11n20 Mode	83.33	0.79
TX 802.11ac20 Mode	91.3	0.40

Test plot

5180-5240MHz

(802.11a) plot

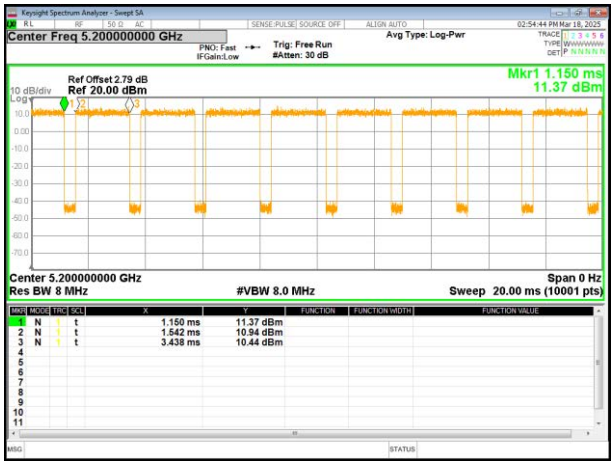

(802.11 n20) plot

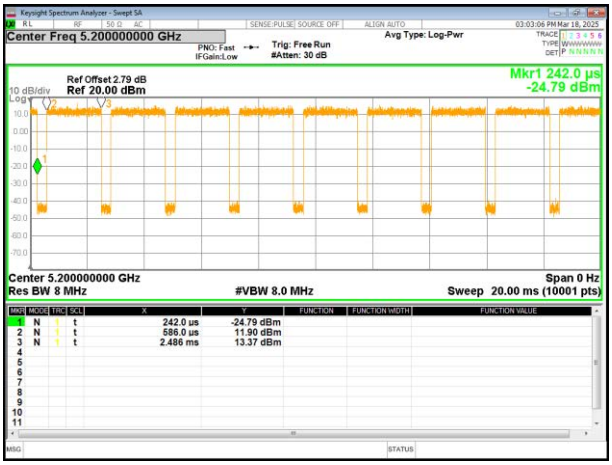

(802.11ac20) plot

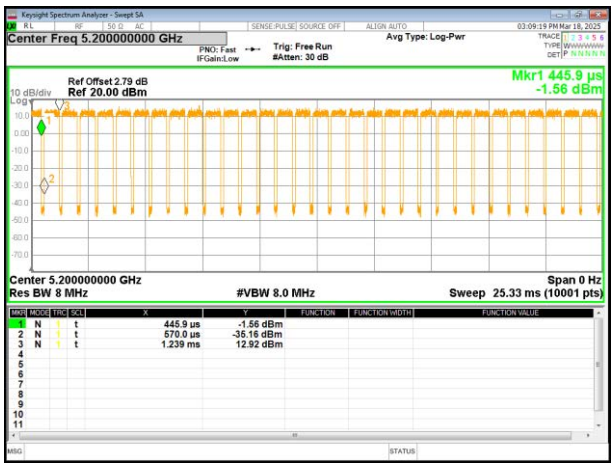

/

/

5745-5825 MHz

(802.11a) plot

(802.11 n20) plot

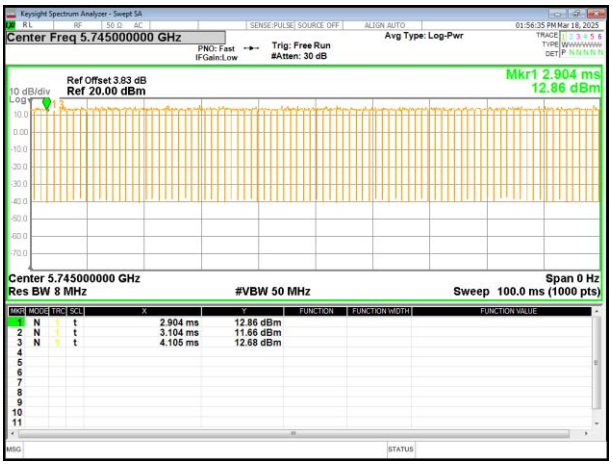

(802.11ac20) plot

/

/

4.4 Conducted Output Power

Test Requirement:	FCC Part15 E Section 15.407 (a)(1)/(a)(3)	
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01	
Limit:	5150-5250MHz : 250mW 5725~5850MHz : 1W	
Test setup:	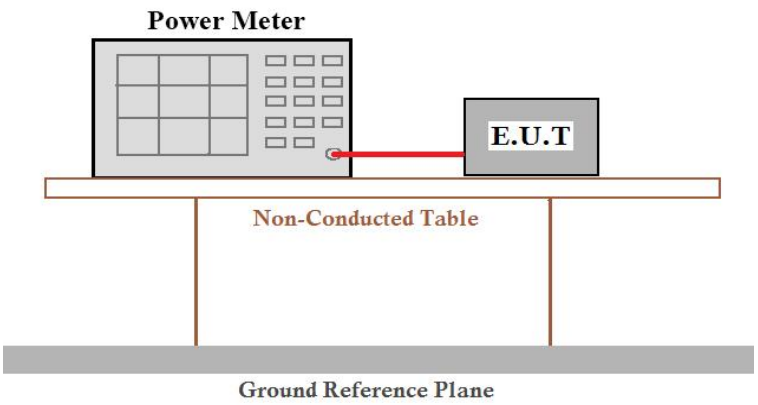	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 23.00°C	Humid.: 46%RH
Test voltage:	DC 12V From Adapter	
Test results:	Pass	

Measurement Result

5180-5240MHz

Test Channel	Frequency	Correction Factor	Maximum output power	Total Power	LIMIT	Result
	(MHz)	(dB)	(dBm)	(dBm)	dBm	
TX 802.11a Mode						
CH36	5180	0.82	13.36	14.18	23.98	Pass
CH40	5200	0.82	13.34	14.16	23.98	Pass
CH48	5240	0.82	13.31	14.13	23.98	Pass
TX 802.11 n20 Mode						
CH36	5180	0.72	13.85	14.57	23.98	Pass
CH40	5200	0.72	13.83	14.55	23.98	Pass
CH48	5240	0.72	13.14	13.86	23.98	Pass
TX 802.11 ac20 Mode						
CH36	5180	0.74	13.86	14.60	23.98	Pass
CH40	5200	0.74	13.78	14.52	23.98	Pass
CH48	5240	0.74	13.14	13.88	23.98	Pass

5745-5825 MHz

Test Channel	Frequency	Correction Factor	Maximum output power	Total Power	LIMIT	Result
	(MHz)	(dB)	(dBm)	(dBm)	dBm	
TX 802.11a Mode						
CH149	5745	0.08	13.95	14.03	30	Pass
CH157	5785	0.08	13.61	13.69	30	Pass
CH165	5825	0.08	13.53	13.61	30	Pass
TX 802.11 n20 Mode						
CH149	5745	0.79	13.79	14.58	30	Pass
CH157	5785	0.79	13.64	14.43	30	Pass
CH165	5825	0.79	13.57	14.36	30	Pass
TX 802.11 ac20 Mode						
CH149	5745	0.40	13.82	14.22	30	Pass
CH157	5785	0.40	13.57	13.97	30	Pass
CH165	5825	0.40	13.47	13.87	30	Pass

4.5 Bandwidth &99% Occupy Bandwidth

Test Requirement:	FCC Part15 E Section 15.407(a)(12)&15.407(e)	
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01	
Limit:	Measurements in the 5.725-5.85 GHz band, the minimum bandwidth 6 dB bandwidth of U-NII devices shall be at least 500KHz. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.	
Test setup:	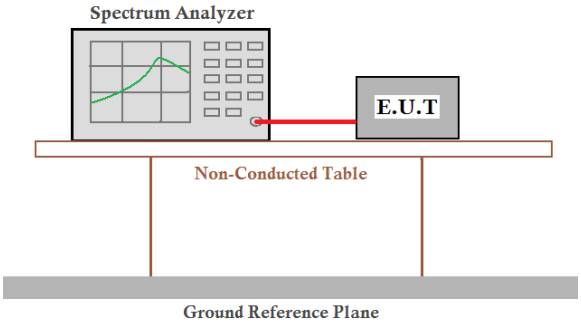	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 23.00°C	Humid.: 46%RH
Test voltage:	DC 12V From Adapter	
Test results:	Pass	

Measurement Result

5180-5240MHz

Test CH	-26dB Channel Bandwidth (MHz)			Result
	802.11a	802.11n (HT20)	802.11ac (VHT20)	
Lowest	24.00	22.70	23.32	Pass
Middle	22.70	21.32	21.80	
Highest	23.62	22.08	21.89	

Test CH	99% Occupy Bandwidth (MHz)			Result
	802.11a	802.11n (HT20)	802.11ac (VHT20)	
Lowest	16.781	17.790	17.810	Pass
Middle	16.555	17.678	17.634	
Highest	16.766	17.739	17.759	

Test plot -26dB Channel Bandwidth

(802.11a) plot on channel 36

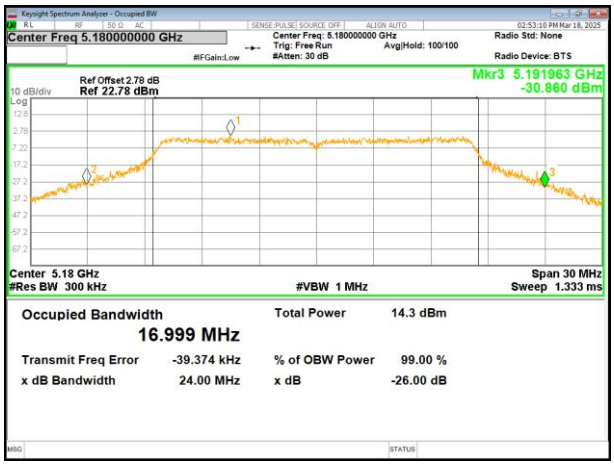

(802.11 n20) plot on channel 36

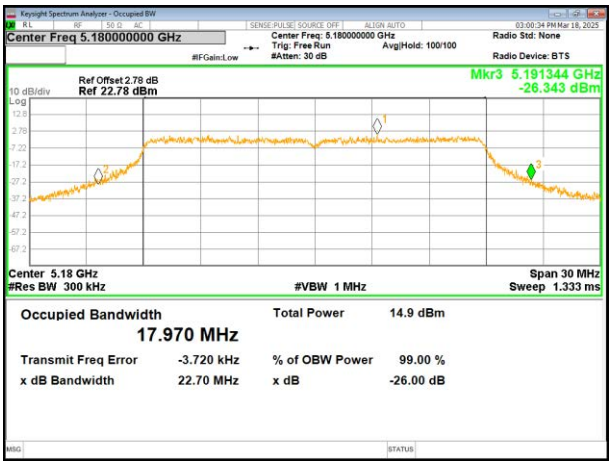

(802.11a) plot on channel 40

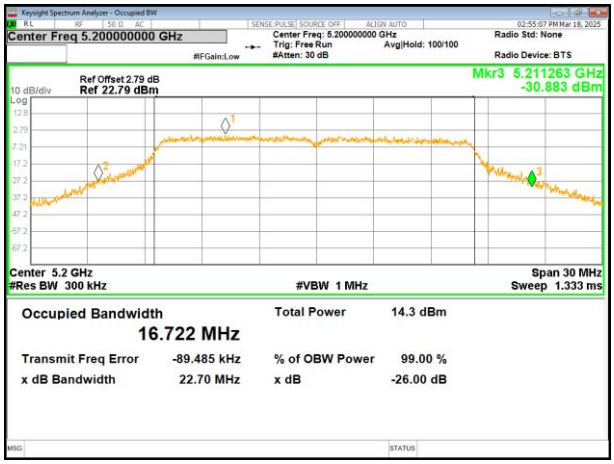

(802.11 n20) plot on channel 40

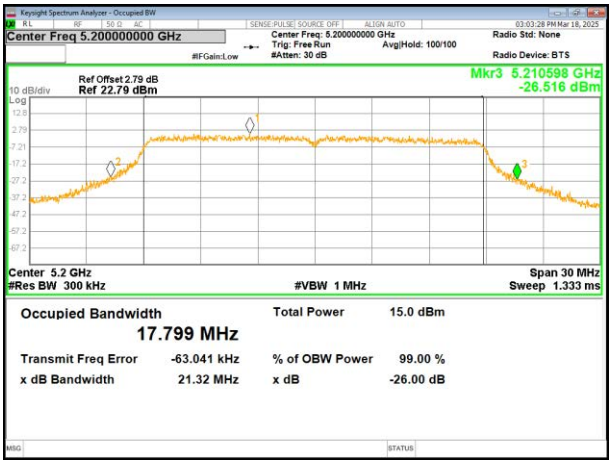

(802.11a) plot on channel 48

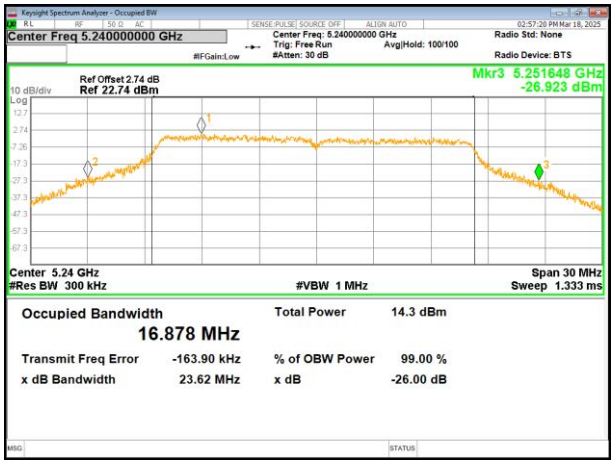

(802.11 n20) plot on channel 48

Test plot

(802.11ac20) plot on channel 36

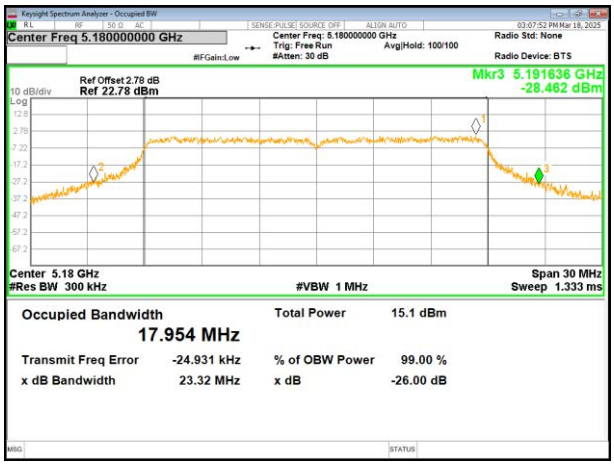

(802.11ac20) plot on channel 40

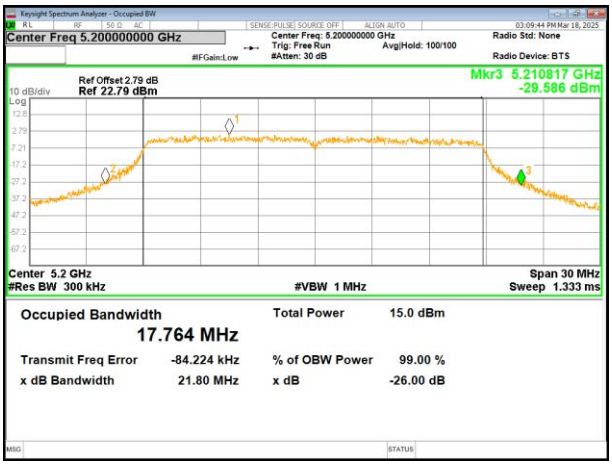

(802.11ac20) plot on channel 48

/

/

Test plot 99% Occupy Bandwidth

(802.11a) plot on channel 36

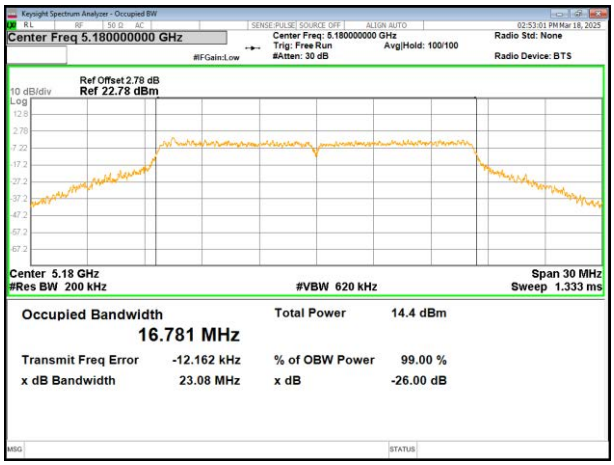

(802.11 n20) plot on channel 36

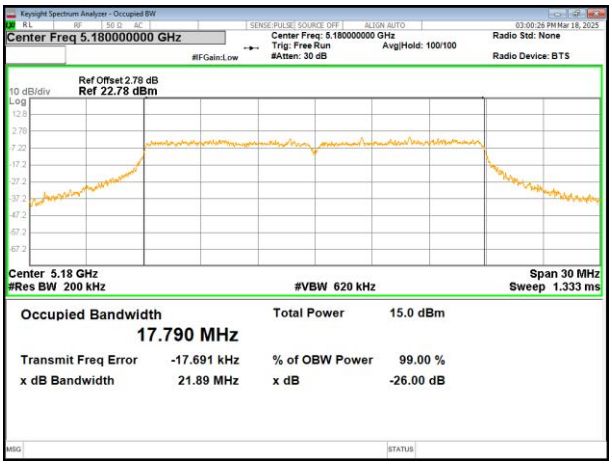

(802.11a) plot on channel 40

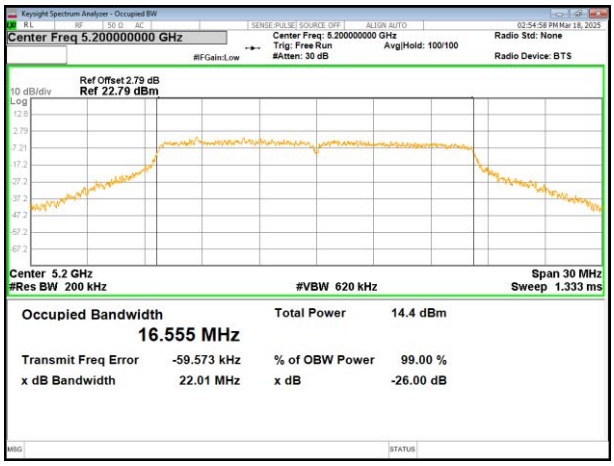

(802.11 n20) plot on channel 40

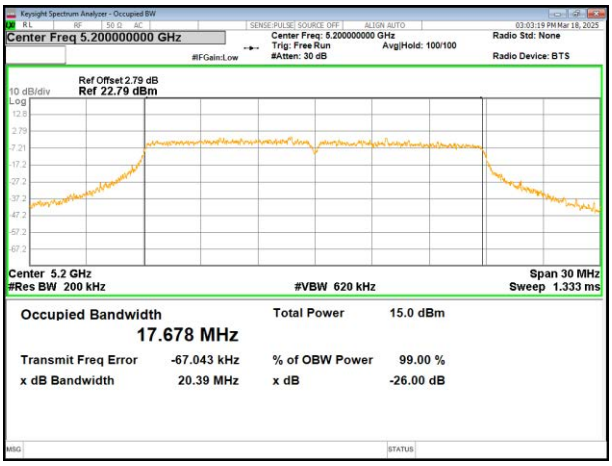

(802.11a) plot on channel 48

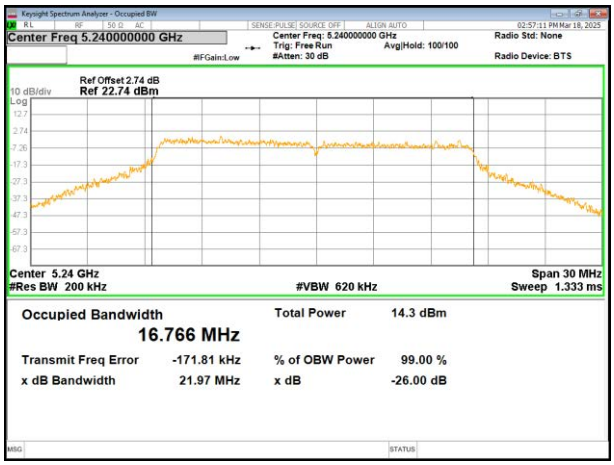

(802.11 n20) plot on channel 48

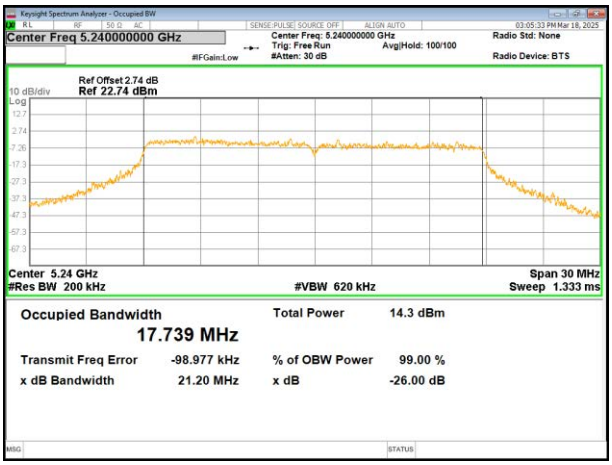

Test plot

(802.11ac20) plot on channel 36

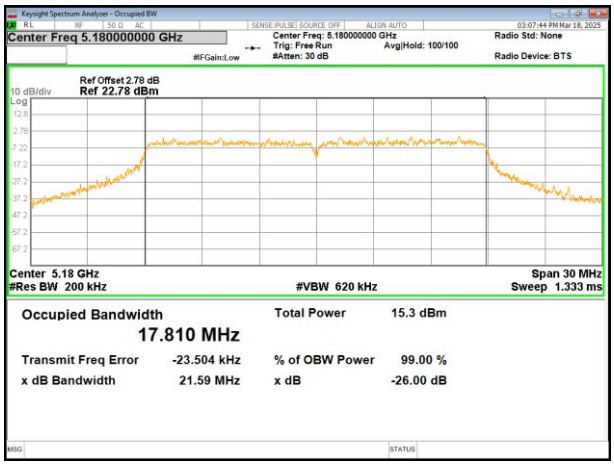

(802.11ac20) plot on channel 40

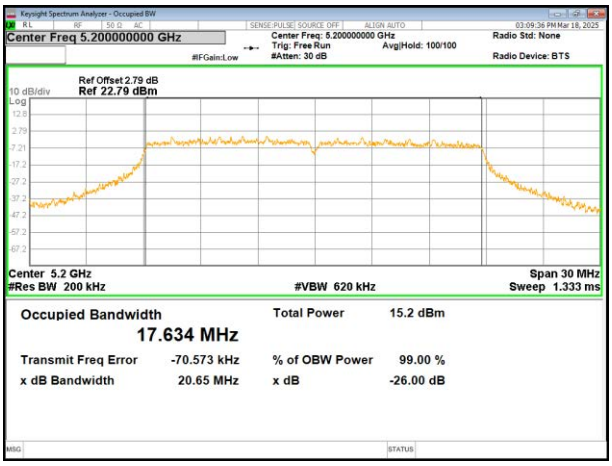

(802.11ac20) plot on channel 48

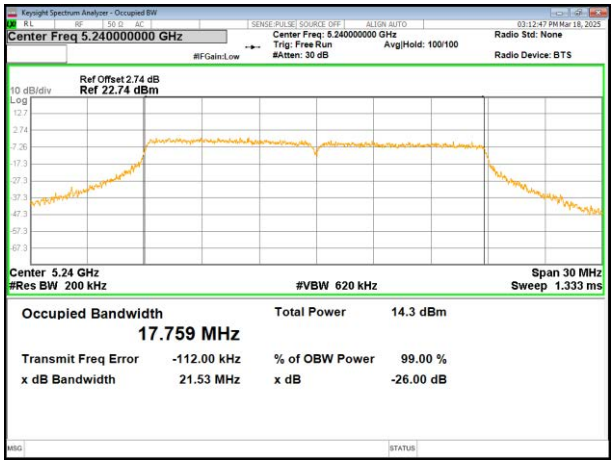

/

/

5745-5825MHz

Test CH	-6dB Channel Bandwidth (MHz)			Limit (KHz)	Result
	802.11a	802.11n (HT20)	802.11ac (VHT20)		
Lowest	15.06	16.35	16.39	>500	Pass
Middle	15.95	17.24	17.16		
Highest	16.32	17.31	17.12		

Remark: “---“is not applicable

Test plot

(802.11a) plot on channel 149

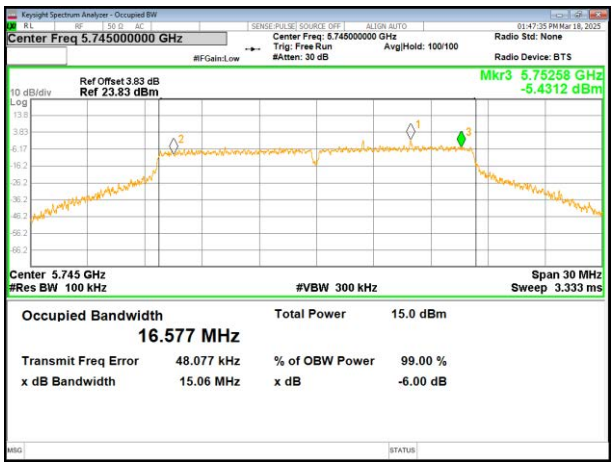

(802.11 n20) plot on channel 149

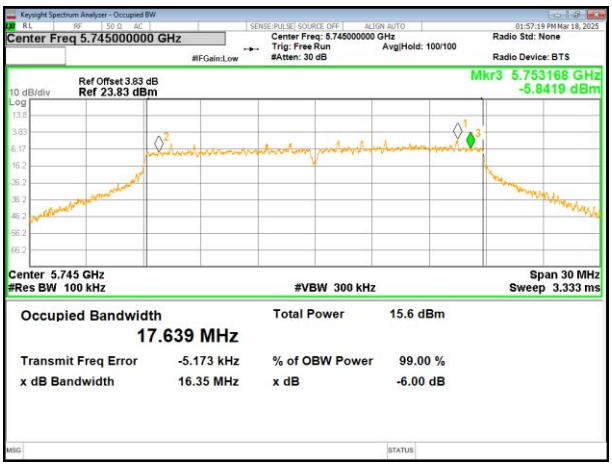

(802.11a) plot on channel 157

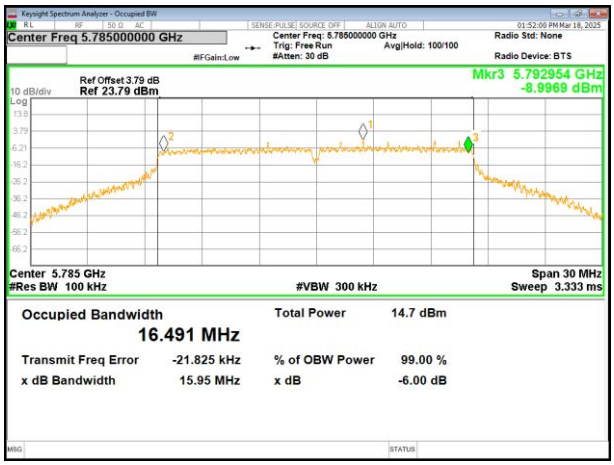

(802.11 n20) plot on channel 157

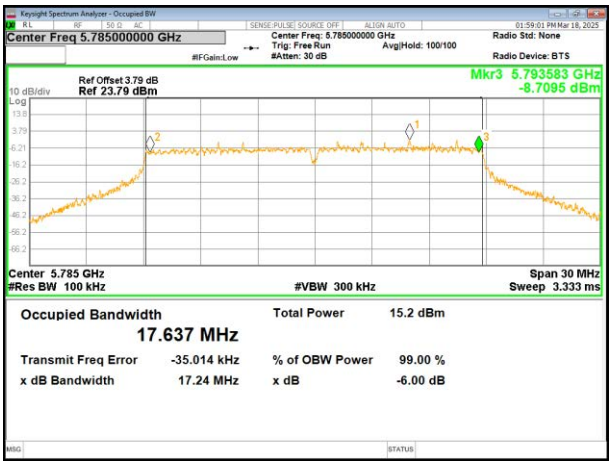

(802.11a) plot on channel 165

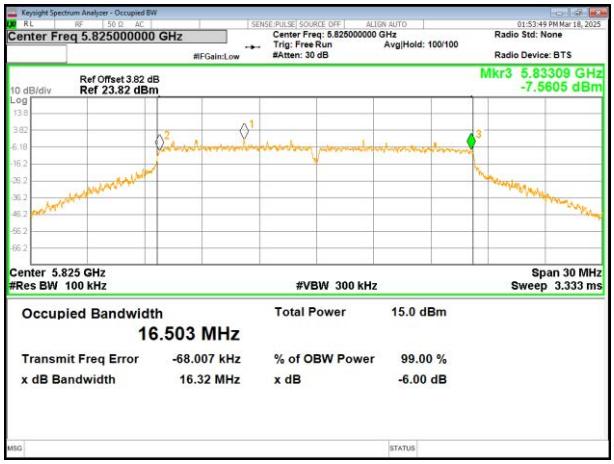

(802.11 n20) plot on channel 165

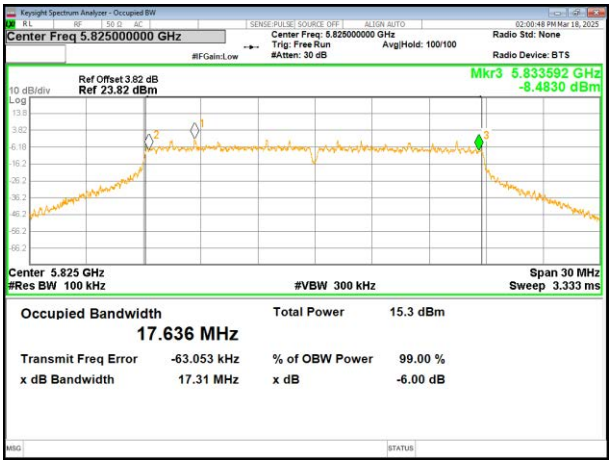

Test plot

(802.11ac20) plot on channel 149

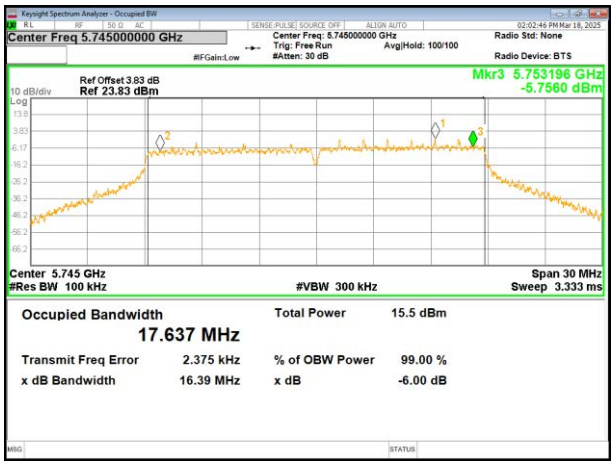

(802.11ac20) plot on channel 157

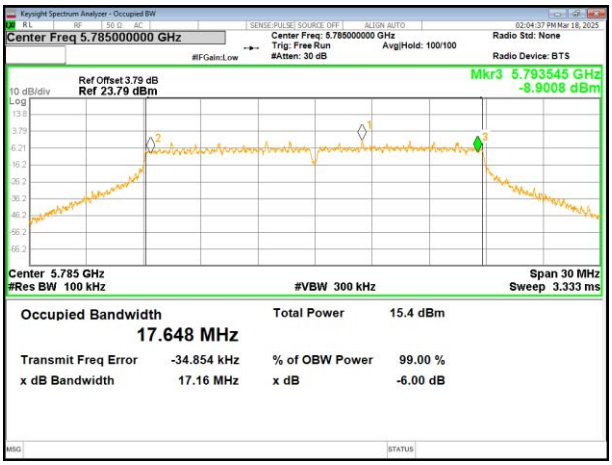

(802.11ac20) plot on channel 165

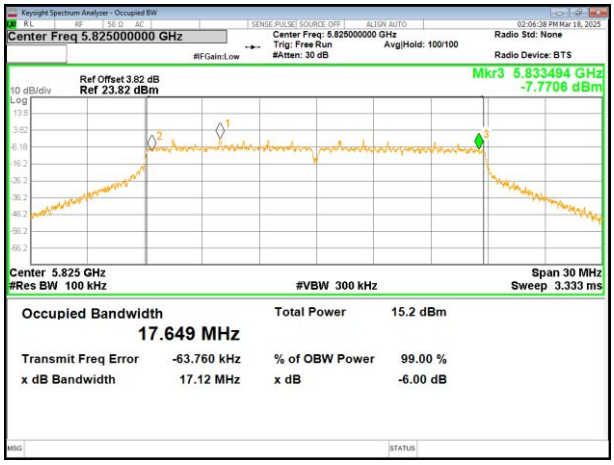

/

/

4.6 Power Spectral Density

Test Requirement:	FCC Part15 E Section 15.407(a)(1)/ (a)(3)
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	

Frequency band (MHz)	Limit
5150-5250	≤17dBm/1MHz for master device
	≤11dBm/1MHz for client device
5250-5350	≤11dBm/1MHz for client device
5470-5725	≤11dBm/1MHz for client device
5725-5850	≤30dBm/500kHz

Test setup:

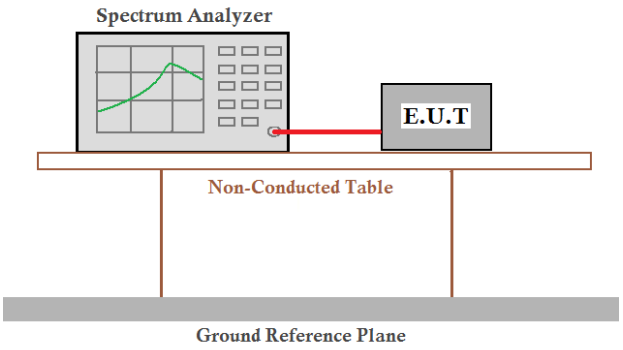

Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 23.00°C	Humid.: 46%RH
Test voltage:	DC 12V From Adapter	
Test results:	Pass	

Measurement Result

5180-5240MHz

Mode	Frequency	Measured Power Density (dBm/MHz)	Correction Factor (dB)	Total Measured Power Density (dBm/MHz)	Limit (dBm/MHz)
802.11 a	5180 MHz	5.926	0.820	6.746	11
	5200 MHz	6.909	0.820	7.729	11
	5240 MHz	6.818	0.820	7.638	11
802.11 n20	5180 MHz	6.392	0.720	7.112	11
	5200 MHz	7.295	0.720	8.015	11
	5240 MHz	6.380	0.720	7.100	11
802.11 ac20	5180 MHz	6.141	0.740	6.881	11
	5200 MHz	7.068	0.740	7.808	11
	5240 MHz	6.596	0.740	7.336	11

(802.11a) PSD plot on channel 36

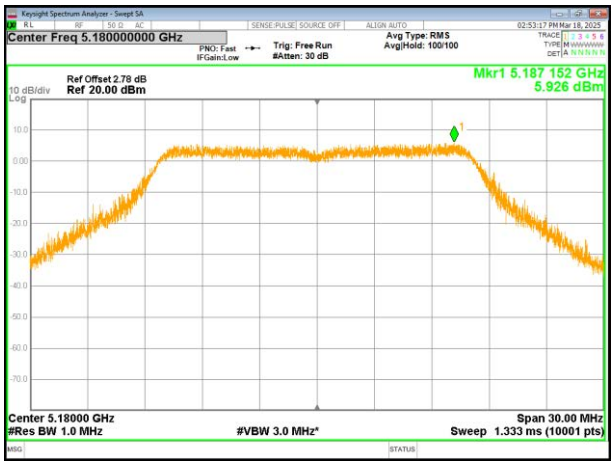

(802.11n20) PSD plot on channel 36

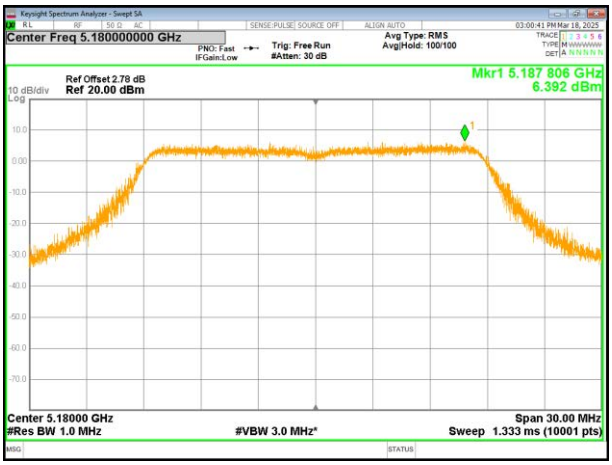

(802.11a) PSD plot on channel 40

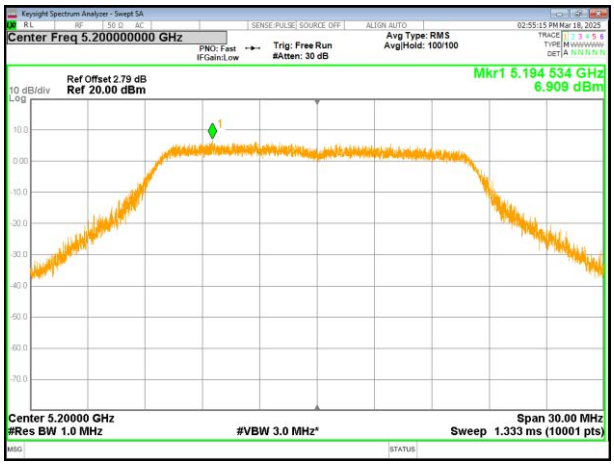

(802.11n20) PSD plot on channel 40

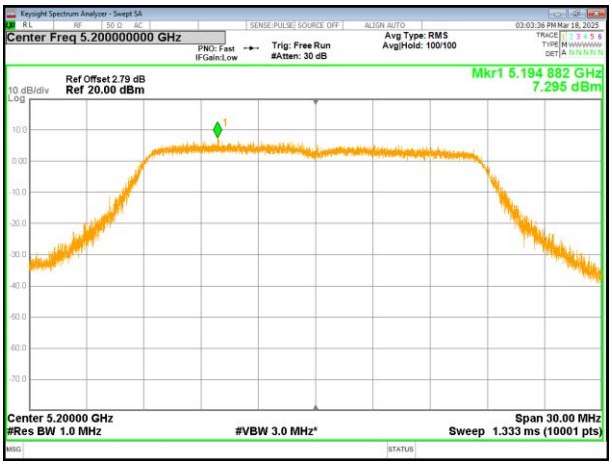

(802.11a) PSD plot on channel 48

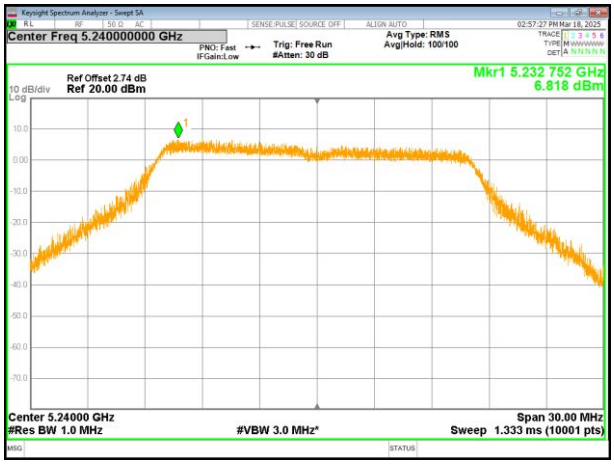

(802.11n20) PSD plot on channel 48

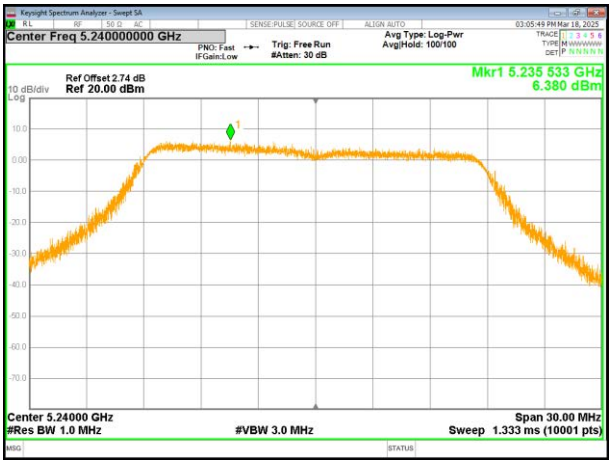

(802.11ac20) PSD plot on channel 36

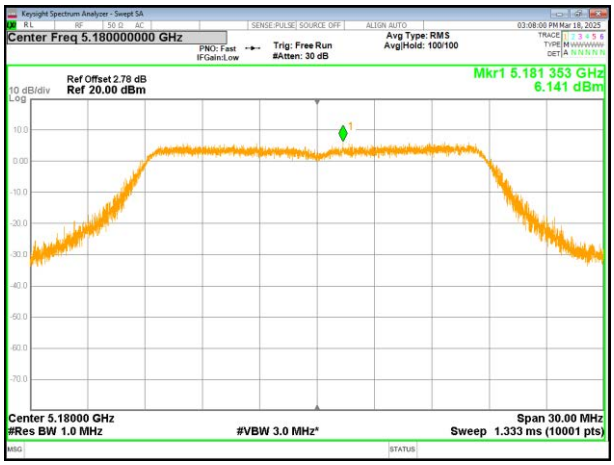

(802.11ac20) PSD plot on channel 40

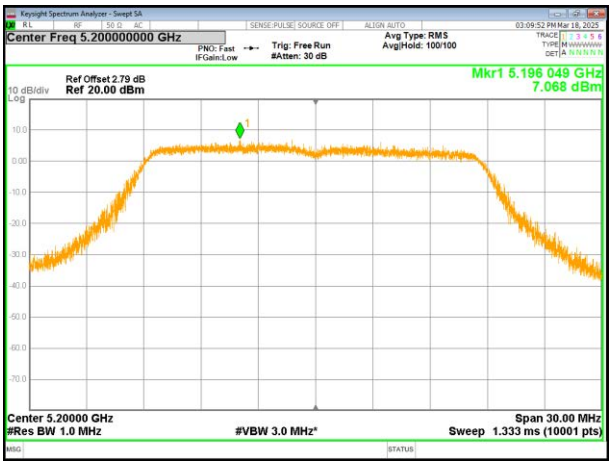

(802.11ac20) PSD plot on channel 48

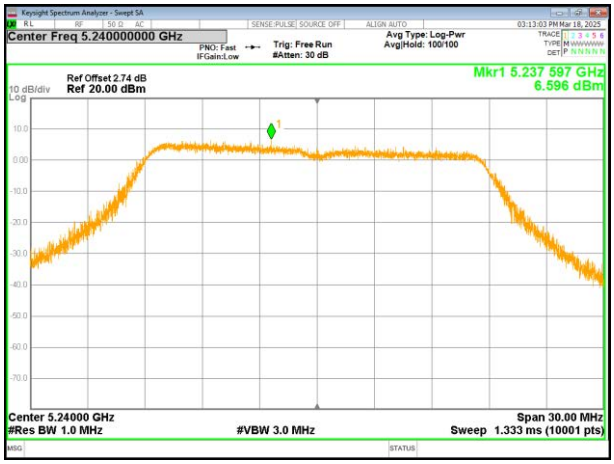

/

/

Mode	Frequency	Measured Power Density (dBm/510KHz)	Measured Power Density (dBm/500KHz)	Correction Factor (dB)	Total Measured Power Density (dBm/500KHz)	Limit (dBm/MHz)
802.11 a	5745 MHz	3.400	3.314	0.080	3.394	30
	5785 MHz	2.888	2.802	0.080	2.882	30
	5825 MHz	2.093	2.007	0.080	2.087	30
802.11 n20	5745 MHz	3.491	3.405	0.790	4.195	30
	5785 MHz	3.364	3.278	0.790	4.068	30
	5825 MHz	3.129	3.043	0.790	3.833	30
802.11ac20	5745 MHz	3.231	3.145	0.400	3.545	30
	5785 MHz	3.014	2.928	0.400	3.328	30
	5825 MHz	2.906	2.820	0.400	3.220	30

Note: 1. If the measurement is X dBm/510kHz, thus X dBm/510kHz = $(10^{X/10})*(500 / 510)$ dBm/500kHz

2. Correction Factor (dB)= duty cycle factor

(802.11a) PSD plot on channel 149

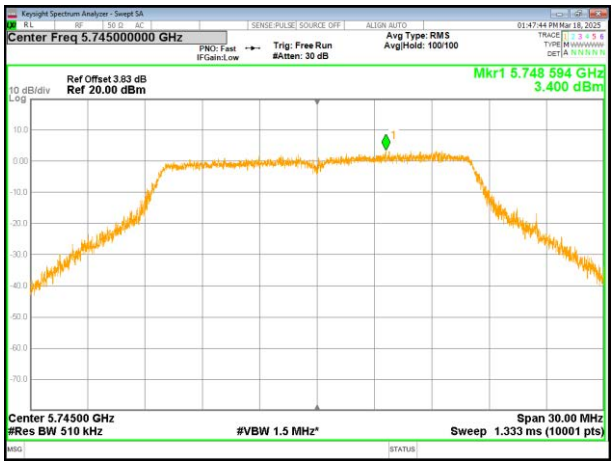

(802.11n20) PSD plot on channel 149

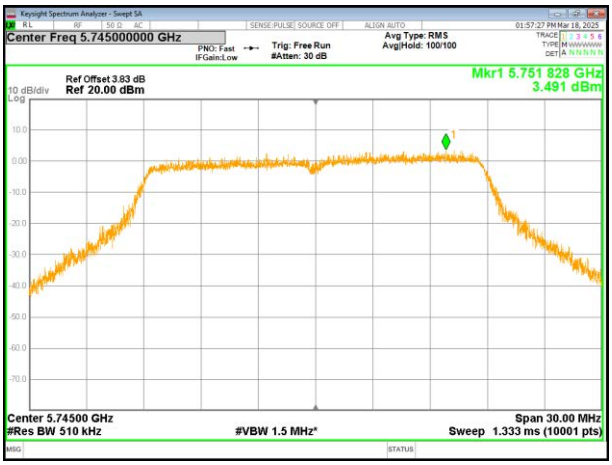

(802.11a) PSD plot on channel 157

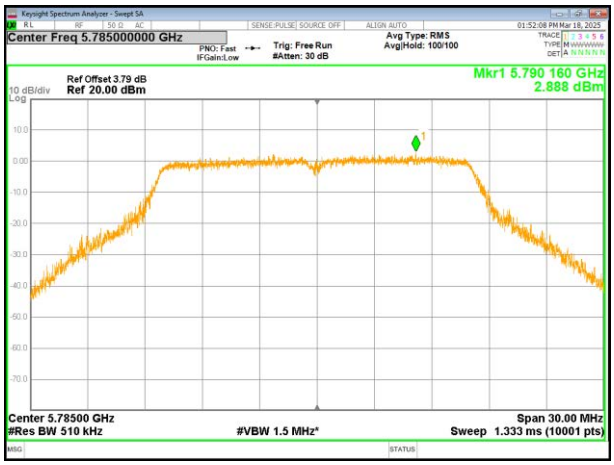

(802.11n20) PSD plot on channel 157

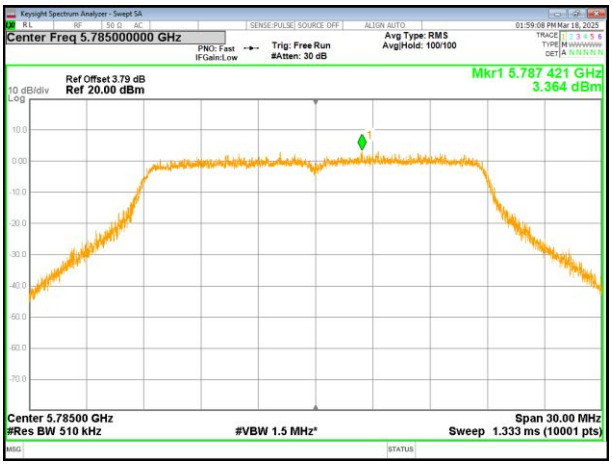

(802.11a) PSD plot on channel 165

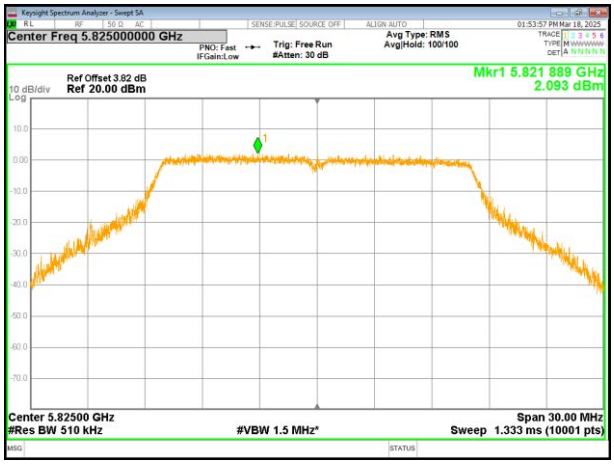

(802.11n20) PSD plot on channel 165

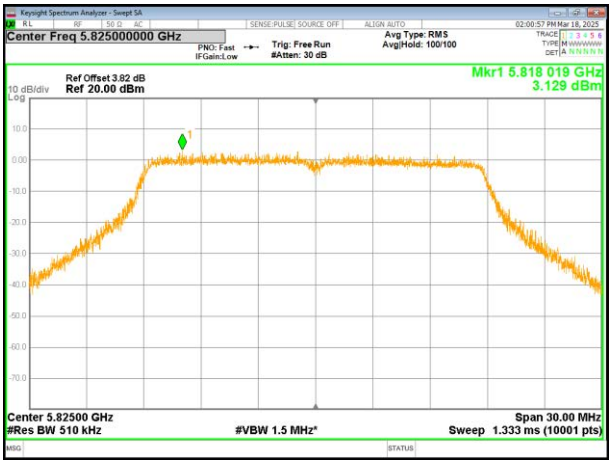

(802.11ac20) PSD plot on channel 149

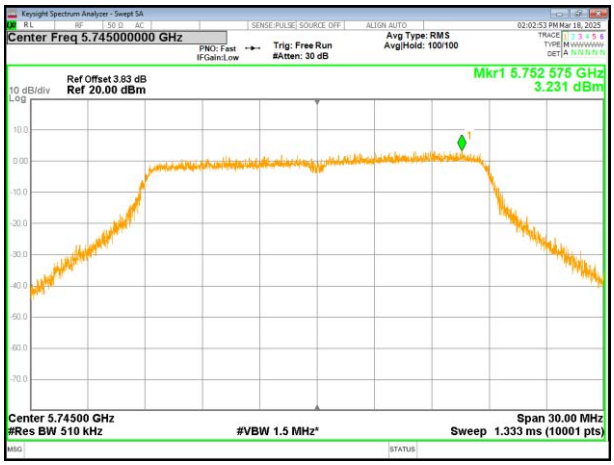

(802.11ac20) PSD plot on channel 157

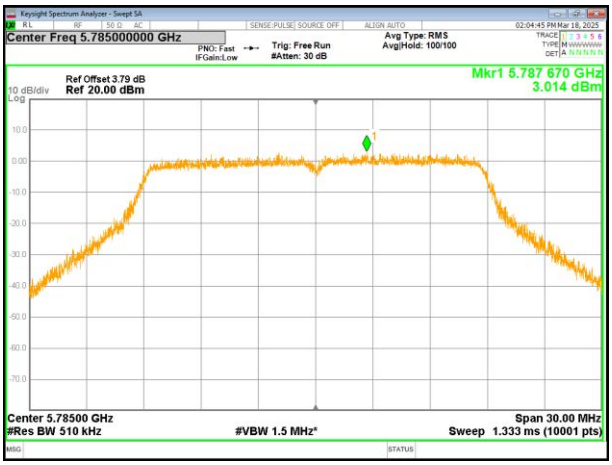

(802.11ac20) PSD plot on channel 165

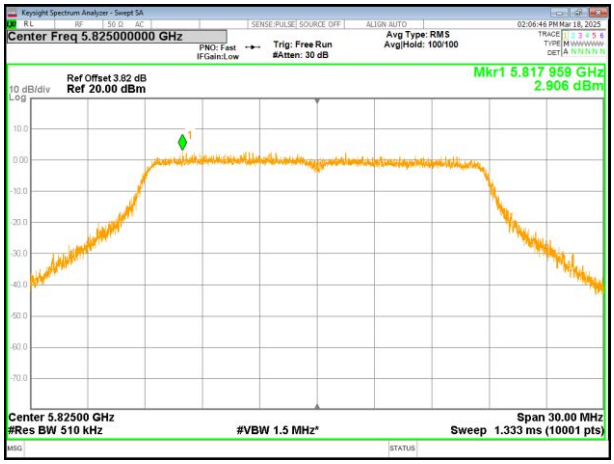

/

/

4.7 Band edge

4.7.1 Conducted test Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205	
Test Method:	ANSI C63.10: 2013	
Limit:	All emissions shall be limited to a level of −27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	
Test setup:	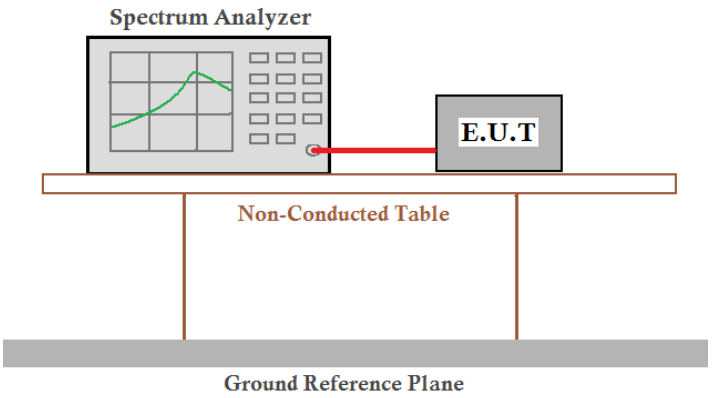	
Test Procedure:	1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. 2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range. 3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span. 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. 5. Repeat above procedures until all measured frequencies were complete..	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 23.00°C	Humid.: 46%RH
Test voltage:	DC 12V From Adapter	
Test results:	Pass	

Remark: Due to the margin value of the sideband test being greater than the antenna gain value, the test meets the requirements

5.180~5.240 GHz

(802.11a) Band Edge, Left Side

(802.11n20) Band Edge, Left Side

(802.11a) Band Edge, Right Side

(802.11n20) Band Edge, Right Side

Remark: The antenna gain and cable loss were not compensated in the test data, and the margin value of the Band Edge test was greater than the sum of the antenna gain and cable loss, so the test met the requirements

(802.11ac20) Band Edge, Left Side

(802.11ac20) Band Edge, Right Side

Remark: The antenna gain and cable loss were not compensated in the test data, and the margin value of the Band Edge test was greater than the sum of the antenna gain and cable loss, so the test met the requirements

5.745~5.825 GHz

(802.11a) Band Edge, Left Side

(802.11n20) Band Edge, Left Side

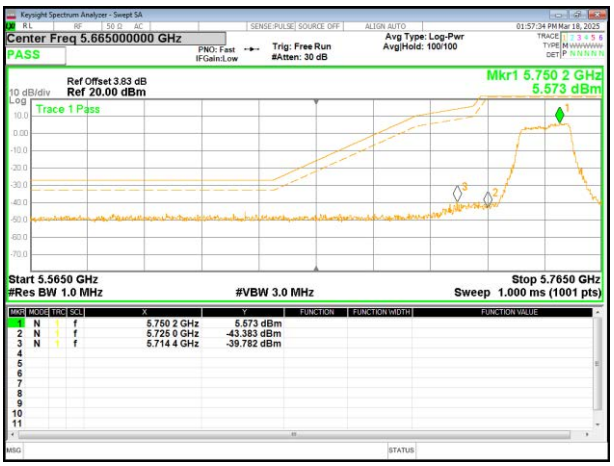

(802.11a) Band Edge, Right Side

(802.11n20) Band Edge, Right Side

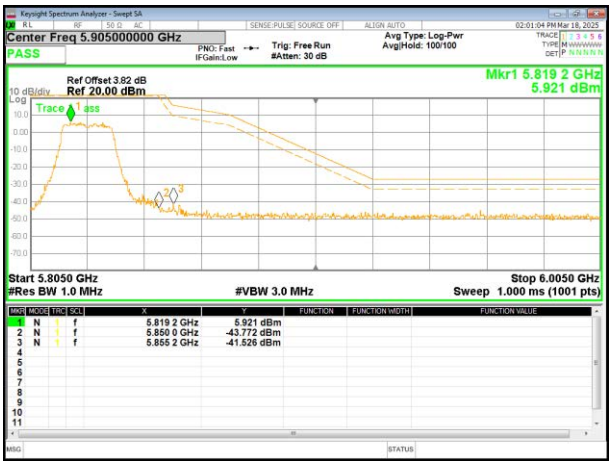

(802.11ac20) Band Edge, Left Side

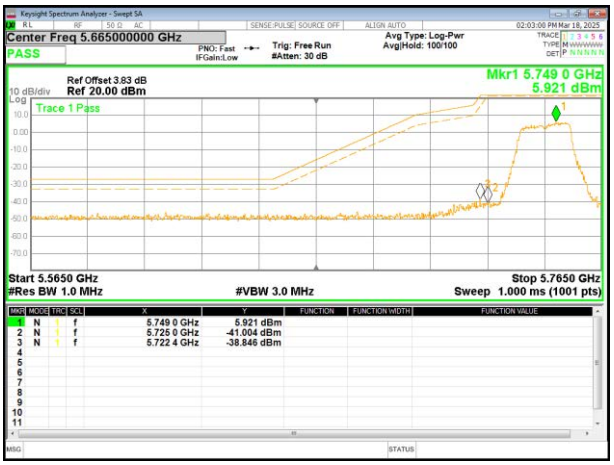

(802.11ac20) Band Edge, Right Side

Remark: Antenna gain and cable loss data included in Offset.

4.8 Spurious Emission

4.8.1 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209, Part 15E Section 15.407(b)(4)
Test Method:	ANSI C63.10:2013
Test Frequency Range:	9kHz to 40GHz
Test site:	Measurement Distance: 3m

Receiver setup:

Frequency	Detector	RBW	VBW	Value
9kHz-150KHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
Above 1GHz	Peak	1MHz	3MHz	Peak Value
	AV	1MHz	3MHz	Average Value

Limit:

Frequency	Limit (uV/m)	Value	Measurement Distance
0.009MHz-0.490MHz	2400/F(KHz)	QP	300m
0.490MHz-1.705MHz	24000/F(KHz)	QP	300m
1.705MHz-30MHz	30	QP	30m
30MHz-88MHz	100	QP	3m
88MHz-216MHz	150	QP	
216MHz-960MHz	200	QP	
960MHz-1GHz	500	QP	

Frequency	Limit (dBm/MHz)	Remark
Above 1GHz	-27.0	Peak Value

Test setup:

For radiated emissions from 9kHz to 30MHz

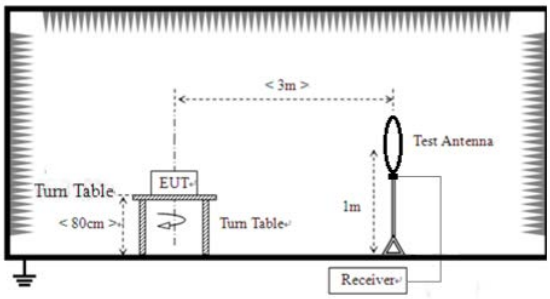

For radiated emissions from 30MHz to1GHz

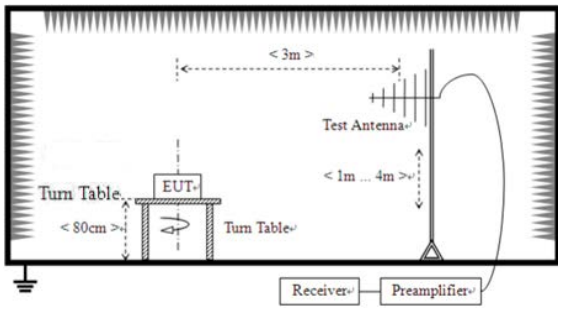

For radiated emissions above 1GHz

	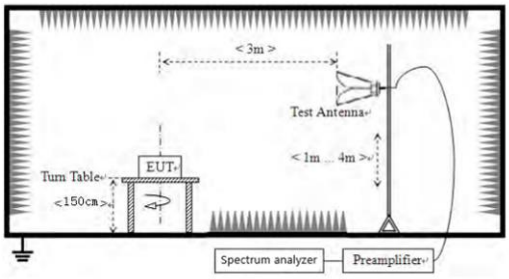
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Remarks:

1. *The report only shows the worst mode.*
2. *Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.*

Measurement Data:

9 kHz ~ 30 MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

Below 1GHz

Remark: The test data shows only the worst case 802.11ac20 mode.

Temperature:	23.00℃	Relative Humidity:	46%
Pressure:	101.2kPar	Test Voltage :	DC 12V From Adapter
Test Mode :	5.2G TX- 802.11ac20 (5180MHz)		

Horizontal:

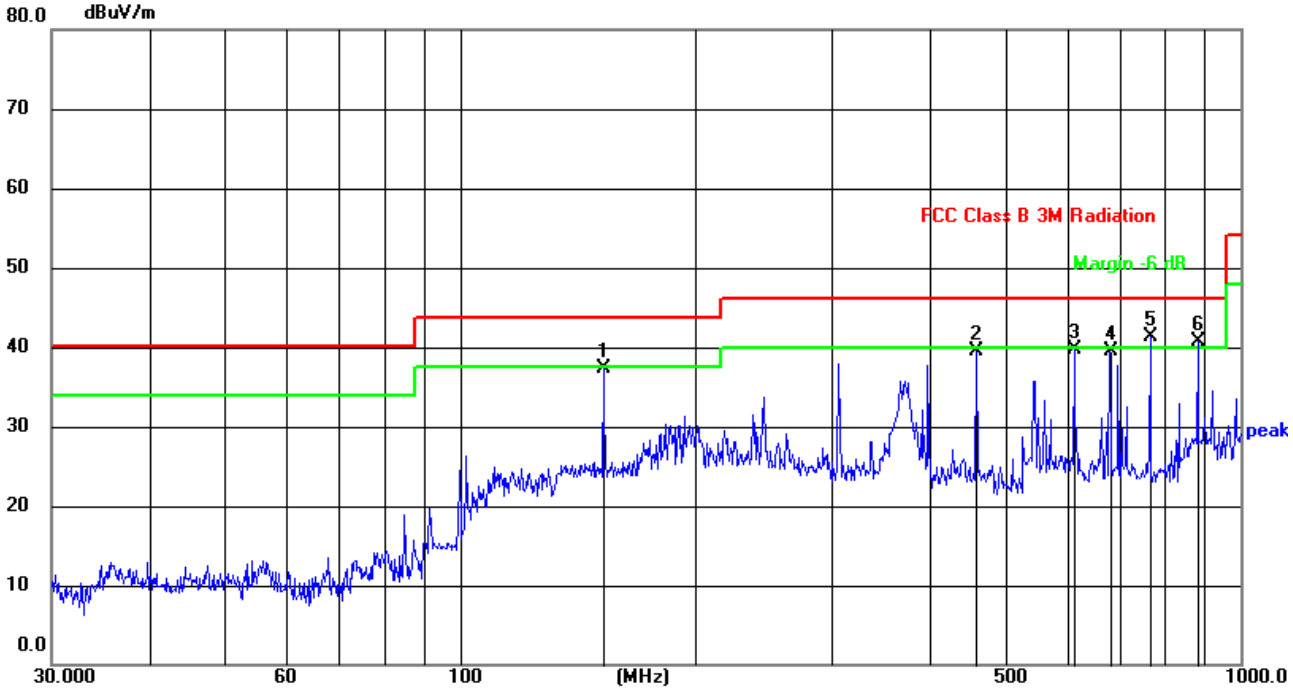

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	152.6639	57.90	-20.52	37.38	43.50	-6.12	QP
2	459.1143	55.03	-15.54	39.49	46.00	-6.51	QP
3	612.0641	50.98	-11.24	39.74	46.00	-6.26	QP
4	679.9600	49.40	-9.83	39.57	46.00	-6.43	QP
5	766.0570	48.96	-7.59	41.37	46.00	-4.63	QP
6	881.4067	46.41	-5.75	40.66	46.00	-5.34	QP

Vertical:

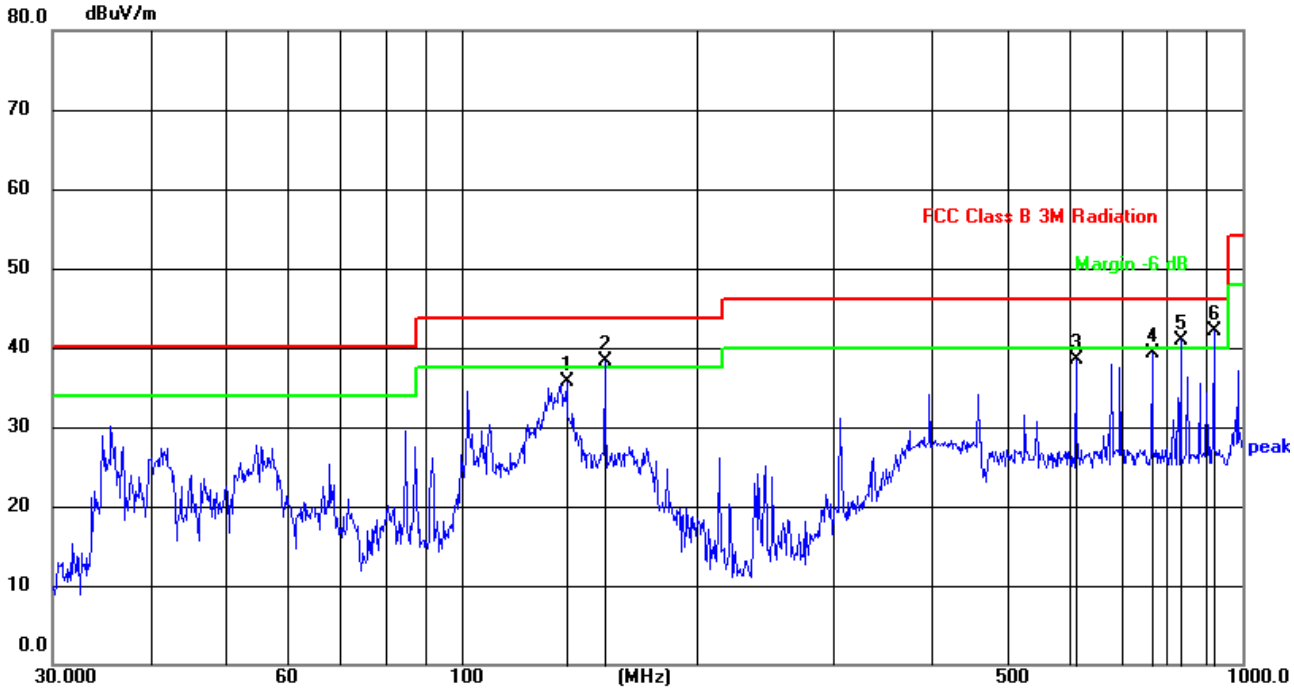

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	136.4598	57.63	-21.95	35.68	43.50	-7.82	QP
2	152.6639	58.87	-20.52	38.35	43.50	-5.15	QP
3	612.0641	49.73	-11.24	38.49	46.00	-7.51	QP
4	766.0570	46.96	-7.59	39.37	46.00	-6.63	QP
5	833.3170	47.35	-6.35	41.00	46.00	-5.00	QP
6	919.2865	46.88	-4.82	42.06	46.00	-3.94	QP

Remarks:
1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The test data shows only the worst case 802.11a mode

Above 1GHz:

Remark: The test data shows only the worst case 802.11ac20 mode.

Temperature:	23.00℃	Relative Humidity:	46%
Pressure:	101.2kPar	Test Voltage :	DC 12V From Adapter
Test Mode :	5.2G TX- 802.11ac20		

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	MHz	dBuV	dB	dB	dB	dBuV/m	dBuV/m	dB	
Low Channel:5180MHz									
V	10360.00	47.26	46.20	8.27	38.50	47.83	68.20	-20.37	PK
V	10360.00	37.49	46.20	8.27	38.50	38.06	54.00	-15.94	AV
V	15540.00	43.12	46.30	10.35	38.70	45.87	74.00	-28.13	PK
V	15540.00	33.57	46.30	10.35	38.70	36.32	54.00	-17.68	AV
V	20720.00	51.21	57.40	11.93	37.80	43.54	68.20	-24.67	PK
V	20720.00	42.17	57.40	11.93	37.80	34.50	54.00	-19.50	AV
V	25900.00	48.78	56.50	13.45	39.70	45.43	68.20	-22.77	PK
V	25900.00	40.30	56.50	13.45	39.70	36.95	54.00	-17.05	AV
V	31080.00	47.42	56.10	16.12	41.60	49.04	68.20	-19.16	PK
V	31080.00	40.21	56.10	16.12	41.60	41.83	54.00	-12.17	AV
V	36260.00	44.70	56.80	18.29	42.80	48.99	68.20	-19.21	PK
V	36260.00	37.98	56.80	18.29	42.80	42.27	54.00	-11.73	AV
H	10360.00	46.17	46.20	8.27	38.50	46.74	68.20	-21.46	PK
H	10360.00	35.39	46.20	8.27	38.50	35.96	54.00	-18.04	AV
H	15540.00	42.20	46.30	10.35	38.70	44.95	74.00	-29.05	PK
H	15540.00	31.84	46.30	10.35	38.70	34.59	54.00	-19.41	AV
H	20720.00	53.47	57.40	11.93	37.80	45.80	68.20	-22.40	PK
H	20720.00	43.13	57.40	11.93	37.80	35.46	54.00	-18.54	AV
H	25900.00	50.21	56.50	13.45	39.70	46.86	68.20	-21.34	PK
H	25900.00	40.33	56.50	13.45	39.70	36.98	54.00	-17.02	AV
H	31080.00	47.52	56.10	16.12	41.60	49.14	68.20	-19.06	PK
H	31080.00	40.15	56.10	16.12	41.60	41.77	54.00	-12.23	AV
H	36260.00	43.72	56.80	18.29	42.80	48.01	68.20	-20.19	PK
H	36260.00	38.81	56.80	18.29	42.80	43.10	54.00	-10.90	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:5200MHz									
V	10400.00	44.84	46.20	8.27	38.50	45.41	68.20	-22.80	PK
V	10400.00	36.25	46.20	8.27	38.50	36.82	54.00	-17.18	AV
V	15600.00	43.01	46.30	10.35	38.40	45.46	74.00	-28.54	PK
V	15600.00	35.30	46.30	10.35	38.40	37.75	54.00	-16.25	AV
V	20800.00	52.44	57.40	11.93	37.80	44.77	68.20	-23.43	PK
V	20800.00	43.46	57.40	11.93	37.80	35.79	54.00	-18.21	AV
V	26000.00	48.37	56.50	13.45	39.80	45.12	68.20	-23.08	PK
V	26000.00	40.70	56.50	13.45	39.80	37.45	54.00	-16.55	AV
V	31200.00	47.50	56.10	16.12	41.60	49.12	68.20	-19.08	PK
V	31200.00	41.13	56.10	16.12	41.60	42.75	54.00	-11.25	AV
V	36400.00	44.03	56.80	18.29	42.80	48.32	68.20	-19.88	PK
V	36400.00	37.82	56.80	18.29	42.80	42.11	54.00	-11.89	AV
H	10400.00	45.41	46.20	8.27	38.50	45.98	68.20	-22.22	PK
H	10400.00	36.79	46.20	8.27	38.50	37.36	54.00	-16.64	AV
H	15600.00	43.37	46.30	10.35	38.40	45.82	74.00	-28.18	PK
H	15600.00	35.37	46.30	10.35	38.40	37.82	54.00	-16.18	AV
H	20800.00	51.16	57.40	11.93	37.80	43.49	68.20	-24.71	PK
H	20800.00	41.31	57.40	11.93	37.80	33.64	54.00	-20.36	AV
H	26000.00	47.79	56.50	13.45	39.80	44.54	68.20	-23.66	PK
H	26000.00	39.83	56.50	13.45	39.80	36.58	54.00	-17.42	AV
H	31200.00	46.76	56.10	16.12	41.60	48.38	68.20	-19.82	PK
H	31200.00	40.01	56.10	16.12	41.60	41.63	54.00	-12.37	AV
H	36400.00	44.16	56.80	18.29	42.80	48.45	68.20	-19.75	PK
H	36400.00	38.60	56.80	18.29	42.80	42.89	54.00	-11.11	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:5240MHz									
V	10480.00	42.07	46.20	8.27	38.60	42.74	68.20	-25.46	PK
V	10480.00	32.75	46.20	8.27	38.60	33.42	54.00	-20.58	AV
V	15720.00	40.55	46.30	10.35	38.40	43.00	74.00	-31.00	PK
V	15720.00	30.59	46.30	10.35	38.40	33.04	54.00	-20.96	AV
V	20960.00	48.97	57.40	11.93	37.50	41.00	68.20	-27.20	PK
V	20960.00	41.15	57.40	11.93	37.50	33.18	54.00	-20.82	AV
V	26200.00	45.34	56.50	13.45	40.10	42.39	68.20	-25.81	PK
V	26200.00	36.46	56.50	13.45	40.10	33.51	54.00	-20.49	AV
V	31440.00	47.45	56.10	16.12	41.30	48.77	68.20	-19.43	PK
V	31440.00	40.85	56.10	16.12	41.30	42.17	54.00	-11.83	AV
V	36680.00	42.96	56.80	18.29	43.10	47.55	68.20	-20.65	PK
V	36680.00	37.80	56.80	18.29	43.10	42.39	54.00	-11.61	AV
H	10480.00	41.91	46.20	8.27	38.60	42.58	68.20	-25.62	PK
H	10480.00	32.81	46.20	8.27	38.60	33.48	54.00	-20.52	AV
H	15720.00	40.21	46.30	10.35	38.40	42.66	74.00	-31.34	PK
H	15720.00	30.64	46.30	10.35	38.40	33.09	54.00	-20.91	AV
H	20960.00	49.39	57.40	11.93	37.50	41.42	68.20	-26.78	PK
H	20960.00	40.74	57.40	11.93	37.50	32.77	54.00	-21.23	AV
H	26200.00	44.59	56.50	13.45	40.10	41.64	68.20	-26.56	PK
H	26200.00	35.55	56.50	13.45	40.10	32.60	54.00	-21.40	AV
H	31440.00	46.74	56.10	16.12	41.30	48.06	68.20	-20.14	PK
H	31440.00	41.09	56.10	16.12	41.30	42.41	54.00	-11.59	AV
H	36680.00	43.99	56.80	18.29	43.10	48.58	68.20	-19.62	PK
H	36680.00	38.51	56.80	18.29	43.10	43.10	54.00	-10.90	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Temperature:	23.00℃	Relative Humidity:	46%
Pressure:	101.2kPar	Test Voltage :	DC 12V From Adapter
Test Mode :	5.8G TX- 802.11n20		

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenn Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Typ
Low Channel:5745MHz									
V	11490.00	45.79	46.10	8.77	39.10	47.56	74.00	-26.44	PK
V	11490.00	34.18	46.10	8.77	39.10	35.95	54.00	-18.05	AV
V	17235.00	40.23	47.60	11.10	38.70	42.43	68.20	-25.77	PK
V	17235.00	32.92	47.60	11.10	38.70	35.12	54.00	-18.88	AV
V	22980.00	52.99	56.90	12.73	37.70	46.52	74.00	-27.48	PK
V	22980.00	40.47	56.90	12.73	37.70	34.00	54.00	-20.00	AV
V	28725.00	46.82	55.60	14.25	40.30	45.77	68.20	-22.43	PK
V	28725.00	40.45	55.60	14.25	40.30	39.40	54.00	-14.60	AV
V	34470.00	46.51	55.90	17.26	42.10	49.97	68.20	-18.23	PK
V	34470.00	38.96	55.90	17.26	42.10	42.42	54.00	-11.58	AV
H	11490.00	44.57	46.10	8.77	39.10	46.34	74.00	-27.66	PK
H	11490.00	33.89	46.10	8.77	39.10	35.66	54.00	-18.34	AV
H	17235.00	39.32	47.60	11.10	38.70	41.52	68.20	-26.68	PK
H	17235.00	33.18	47.60	11.10	38.70	35.38	54.00	-18.62	AV
H	22980.00	54.55	56.90	12.73	37.70	48.08	74.00	-25.92	PK
H	22980.00	45.29	56.90	12.73	37.70	38.82	54.00	-15.18	AV
H	28725.00	46.11	55.60	14.25	40.30	45.06	68.20	-23.14	PK
H	28725.00	40.81	55.60	14.25	40.30	39.76	54.00	-14.24	AV
H	34470.00	45.73	55.90	17.26	42.10	49.19	68.20	-19.01	PK
H	34470.00	39.19	55.90	17.26	42.10	42.65	54.00	-11.35	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:5785MHz									
V	11570.00	45.26	46.10	8.77	39.10	47.03	74.00	-26.97	PK
V	11570.00	34.38	46.10	8.77	39.10	36.15	54.00	-17.85	AV
V	17355.00	39.90	47.60	11.10	38.70	42.10	68.20	-26.10	PK
V	17355.00	34.54	47.60	11.10	38.70	36.74	54.00	-17.26	AV
V	23140.00	54.79	56.90	12.73	37.70	48.32	74.00	-25.68	PK
V	23140.00	44.29	56.90	12.73	37.70	37.82	54.00	-16.18	AV
V	28925.00	43.88	55.60	14.25	40.30	42.83	68.20	-25.37	PK
V	28925.00	40.12	55.60	14.25	40.30	39.07	54.00	-14.93	AV
V	34710.00	45.32	55.90	17.26	42.40	49.08	68.20	-19.12	PK
V	34710.00	39.50	55.90	17.26	42.40	43.26	54.00	-10.74	AV
H	11570.00	45.82	46.10	8.77	39.10	47.59	74.00	-26.42	PK
H	11570.00	35.22	46.10	8.77	39.10	36.99	54.00	-17.01	AV
H	17355.00	40.78	47.60	11.10	38.70	42.98	68.20	-25.22	PK
H	17355.00	34.30	47.60	11.10	38.70	36.50	54.00	-17.50	AV
H	23140.00	56.00	56.90	12.73	37.70	49.53	74.00	-24.47	PK
H	23140.00	45.09	56.90	12.73	37.70	38.62	54.00	-15.38	AV
H	28925.00	45.90	55.60	14.25	40.30	44.85	68.20	-23.35	PK
H	28925.00	39.79	55.60	14.25	40.30	38.74	54.00	-15.26	AV
H	34710.00	43.85	55.90	17.26	42.40	47.61	68.20	-20.59	PK
H	34710.00	39.43	55.90	17.26	42.40	43.19	54.00	-10.81	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:5825MHz									
V	11650.00	45.49	46.10	8.77	39.10	47.26	74.00	-26.74	PK
V	11650.00	34.18	46.10	8.77	39.10	35.95	54.00	-18.05	AV
V	17475.00	40.64	47.90	11.23	38.90	42.87	68.20	-25.33	PK
V	17475.00	35.87	47.90	11.23	38.90	38.10	54.00	-15.90	AV
V	23300.00	49.28	57.10	12.73	37.80	42.71	68.20	-25.49	PK
V	23300.00	44.36	57.10	12.73	37.80	37.79	54.00	-16.21	AV
V	29125.00	45.54	55.80	14.25	40.50	44.49	68.20	-23.71	PK
V	29125.00	40.95	55.80	14.25	40.50	39.90	54.00	-14.10	AV
V	34950.00	44.60	56.30	17.91	42.50	48.71	68.20	-19.49	PK
V	34950.00	39.16	56.30	17.91	42.50	43.27	54.00	-10.73	AV
H	11650.00	46.11	46.10	8.77	39.10	47.88	74.00	-26.12	PK
H	11650.00	32.87	46.10	8.77	39.10	34.64	54.00	-19.36	AV
H	17475.00	40.51	47.90	11.23	38.90	42.74	68.20	-25.46	PK
H	17475.00	35.64	47.90	11.23	38.90	37.87	54.00	-16.13	AV
H	23300.00	50.54	57.10	12.73	37.80	43.97	68.20	-24.23	PK
H	23300.00	45.09	57.10	12.73	37.80	38.52	54.00	-15.48	AV
H	29125.00	46.89	55.80	14.25	40.50	45.84	68.20	-22.36	PK
H	29125.00	41.01	55.80	14.25	40.50	39.96	54.00	-14.04	AV
H	34950.00	44.33	56.30	17.91	42.50	48.44	68.20	-19.76	PK
H	34950.00	39.01	56.30	17.91	42.50	43.12	54.00	-10.88	AV

Remark:
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4.8.2 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.209, Part 15E Section 15.407(b)(4)	
Test Method:	ANSI C63.10:2013	
Limit:	-27dBm/MHz	
Test setup:	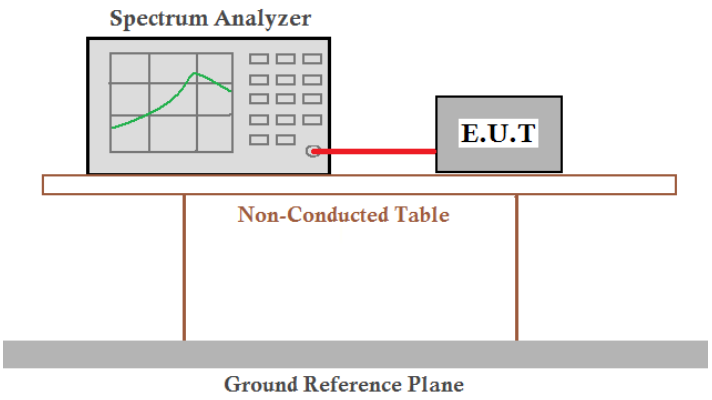	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 23.00°C	Humid.: 46%RH
Test voltage:	DC 12V From Adapter	
Test results:	Pass	

Remark:

1. Antenna gain and cable loss data included in Offset.

2. We tested 30MHz-40GHz frequency and found 27GHz-40GHz test data was very lower (close to the noise of the spectrum analyzer). The test report only showed data for 30MHz-27GHz.

5180-5240MHz

Test Plot

802.11a on channel 36

802.11a on channel 40

802.11a on channel 48

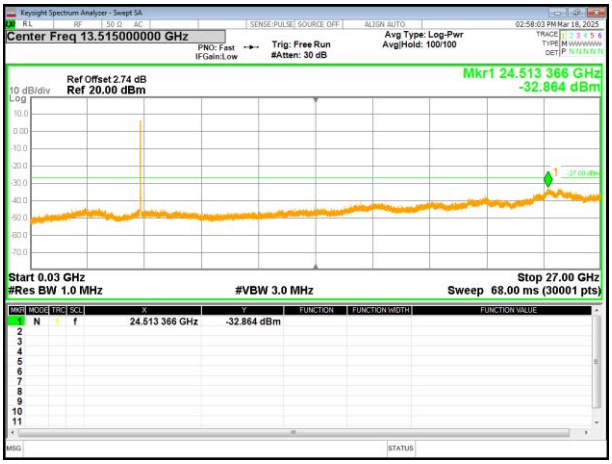

802.11n20 on channel 36

802.11n20 on channel 40

802.11n20 on channel 48

Test Plot

802.11ac20 on channel 36

802.11ac20 on channel 40

802.11ac20 on channel 48

/

/

5745-5825MHz

Test Plot

802.11a on channel 149

802.11a on channel 157

802.11a on channel 165

802.11n20 on channel 149

802.11n20 on channel 157

802.11n20 on channel 165

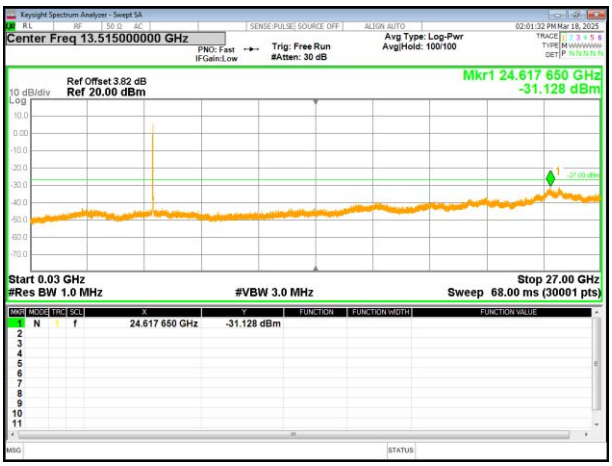

Test Plot

802.11ac20 on channel 149

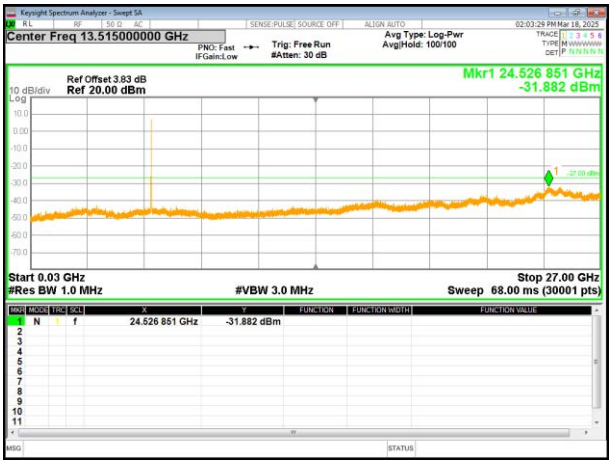

802.11ac20 on channel 157

802.11ac20 on channel 165

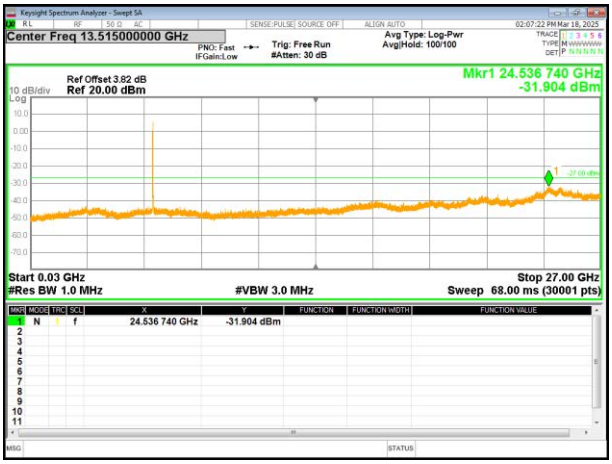

/

/

4.9 Frequency stability

Test Requirement:	FCC Part15 C Section 15.407(g)
Test Method:	ANSI C63.10:2013, FCC Part 2.1055
Limit:	Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified
Test Procedure:	a. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 Minutes. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minute s. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
Test setup:	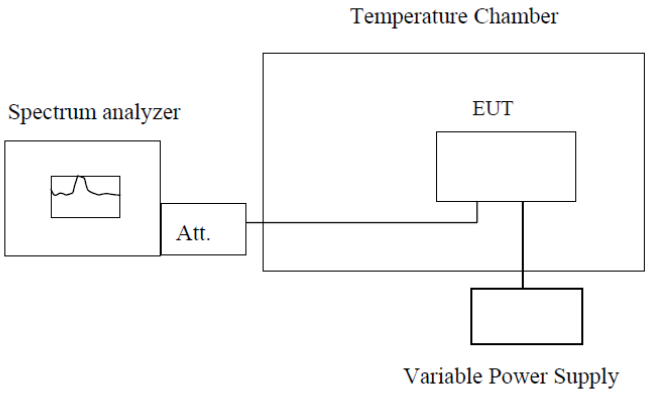 **Note :** Measurement setup for testing on Antenna connector
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Remark: Set the EUT transmits at un-modulation mode to test frequency stability.

Measurement data:

Frequency stability versus Temp.					
Power Supply: DC 12V					
Temp. (°C)	Operating Frequency (MHz)	0 minute	2 minute	5 minute	10 minute
		Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)
-30	5180	5179.960	5179.970	5179.850	5179.870
	5200	5199.960	5199.870	5199.750	5199.870
	5240	5239.930	5239.860	5239.740	5239.880
-20	5180	5179.960	5179.900	5180.040	5179.920
	5200	5199.960	5199.880	5200.030	5199.920
	5240	5239.970	5239.900	5240.030	5239.920
-10	5180	5179.960	5179.850	5179.720	5179.870
	5200	5199.960	5199.840	5199.720	5199.870
	5240	5239.930	5239.820	5239.710	5239.870
0	5180	5179.740	5179.830	5179.730	5179.880
	5200	5199.910	5199.830	5199.730	5199.870
	5240	5239.960	5239.830	5239.730	5239.870
10	5180	5179.940	5179.840	5179.740	5179.880
	5200	5199.950	5199.840	5199.730	5199.880
	5240	5239.960	5239.850	5239.700	5239.890
20	5180	5179.750	5179.870	5180.040	5179.910
	5200	5199.920	5199.880	5200.040	5199.910
	5240	5239.960	5239.870	5240.050	5239.910
30	5180	5179.920	5179.880	5180.030	5180.040
	5200	5199.980	5199.880	5200.030	5199.940
	5240	5239.970	5239.880	5240.030	5239.930
40	5180	5179.750	5179.870	5180.040	5179.910
	5200	5199.920	5199.880	5200.040	5199.910
	5240	5239.960	5239.870	5240.050	5239.910
50	5180	5179.950	5179.890	5180.040	5179.920
	5200	5199.950	5199.880	5200.040	5189.920
	5240	5239.950	5239.890	5240.050	5229.910

Frequency stability versus Voltage					
Temperature: 25°C					
Power Supply (VAC)	Operating Frequency (MHz)	0 minute	2 minute	5 minute	10 minute
		Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)
DC 10.2V	5180	5179.950	5179.870	5180.050	5179.920
	5200	5199.960	5199.880	5200.040	5199.910
	5240	5180.080	5179.890	5180.040	5179.900
DC 12V	5180	5199.960	5189.880	5190.030	5189.910
	5200	5209.960	5209.900	5210.030	5209.910
	5240	5180.080	5179.890	5180.040	5179.900
DC 13.8V	5180	5179.960	5179.890	5180.040	5179.910
	5200	5199.950	5199.880	5200.030	5199.910
	5240	5239.950	5239.890	5240.030	5239.910

Frequency stability versus Temp.					
Power Supply: DC 12V					
Temp. (°C)	Operating Frequency (MHz)	0 minute	2 minute	5 minute	10 minute
		Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)
-30	5745	5744.940	5744.880	5745.030	5744.900
	5785	5784.960	5784.870	5785.030	5784.920
	5825	5824.950	5824.800	5825.050	5824.920
-20	5745	5744.940	5744.890	5745.030	5744.920
	5785	5784.960	5784.880	5785.040	5784.900
	5825	5824.950	5824.880	5825.050	5824.930
-10	5745	5744.960	5744.900	5745.040	5744.910
	5785	5784.950	5784.900	5785.030	5784.930
	5825	5824.980	5824.900	5825.060	5824.930
0	5745	5744.950	5744.880	5745.030	5744.910
	5785	5784.950	5784.870	5785.030	5784.910
	5825	5824.950	5824.800	5825.030	5824.920
10	5745	5744.940	5744.890	5745.030	5744.920
	5785	5784.960	5784.880	5785.040	5784.900
	5825	5824.950	5824.880	5825.050	5824.930
20	5745	5744.950	5744.880	5745.040	5744.540
	5785	5784.960	5784.880	5785.040	5784.920
	5825	5824.880	5824.880	5825.040	5824.900
30	5745	5744.940	5744.890	5745.030	5744.920
	5785	5784.960	5784.880	5785.040	5784.900
	5825	5824.950	5824.880	5825.050	5824.930
40	5745	5744.950	5744.880	5745.040	5744.540
	5785	5784.960	5784.880	5785.040	5784.920
	5825	5824.950	5824.800	5825.050	5824.920
50	5745	5744.950	5744.880	5745.030	5744.910
	5785	5784.950	5784.870	5785.030	5784.910
	5825	5824.950	5824.800	5825.030	5824.920

Frequency stability versus Voltage					
Temperature: 25°C					
Power Supply (VAC)	Operating Frequency (MHz)	0 minute	2 minute	5 minute	10 minute
		Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)
DC 10.8V	5745	5744.950	5744.880	5745.030	5744.900
	5785	5784.960	5784.880	5785.020	5784.910
	5825	5824.970	5824.890	5824.960	5824.910
DC 12V	5745	5744.960	5744.900	5745.040	5744.910
	5785	5784.950	5784.900	5785.030	5784.930
	5825	5824.980	5824.900	5825.060	5824.930
DC 13.2V	5745	5744.950	5744.890	5745.020	5744.930
	5785	5784.950	5784.880	5785.030	5784.930
	5825	5824.950	5824.880	5825.050	5824.930

5 Test Setup Photo

Reference to the **appendix I** for details.

6 EUT Constructional Details

Reference to the **appendix II** for details.

------END------