



E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.125	0.589	0.240	0.148	0.076	0.039	0.020

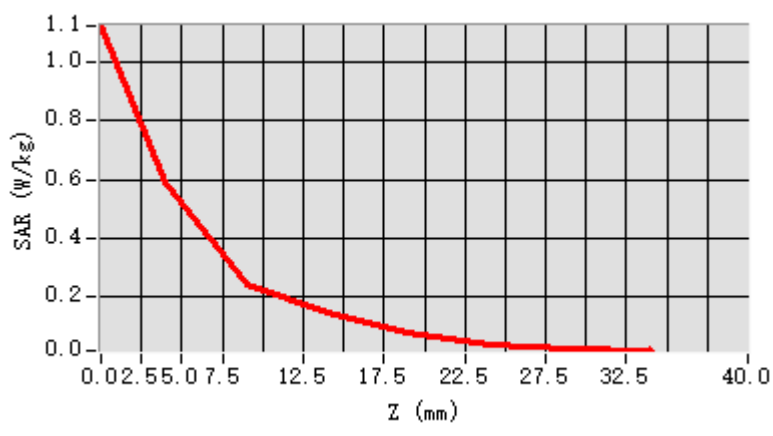


F. 3D Image

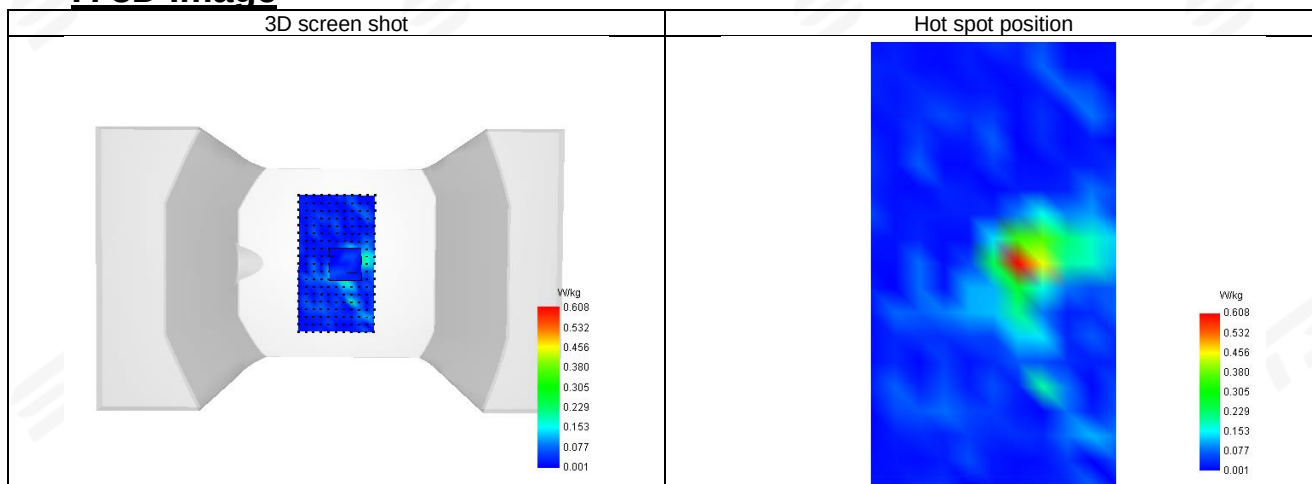



Plot 6: DUT: Tablet; EUT Model: B7 Pro,

Test Date	2026-01-31
ConvF	1.82
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11b ISM
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2462
Relative permittivity (real part)	39.07
Conductivity (S/m)	1.81

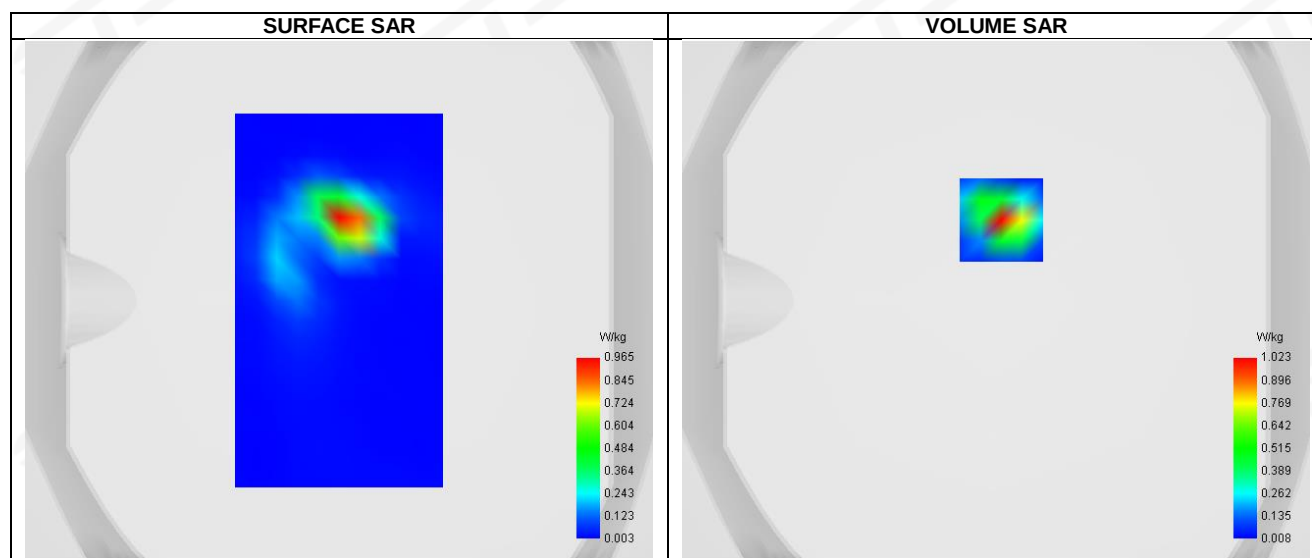


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.312
SAR 1g (W/Kg)	0.875
Horizontal validation criteria: minimum distance (mm)	11.352140
Vertical validation criteria: SAR ratio M2/M1 (%)	41.502239

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.923	1.023	0.419	0.215	0.100	0.047	0.022

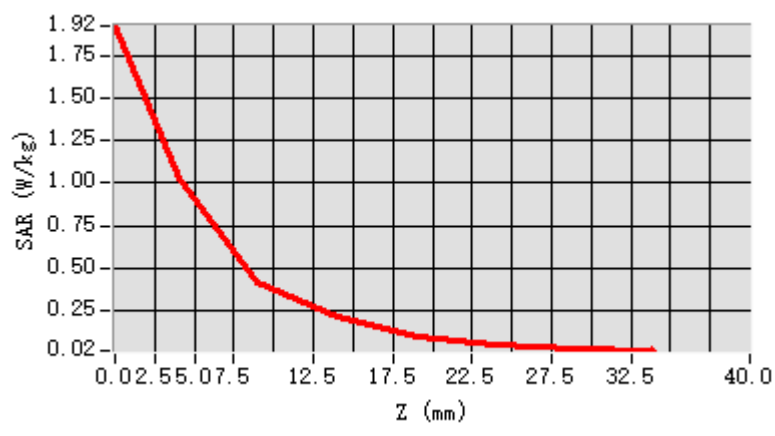


F. 3D Image

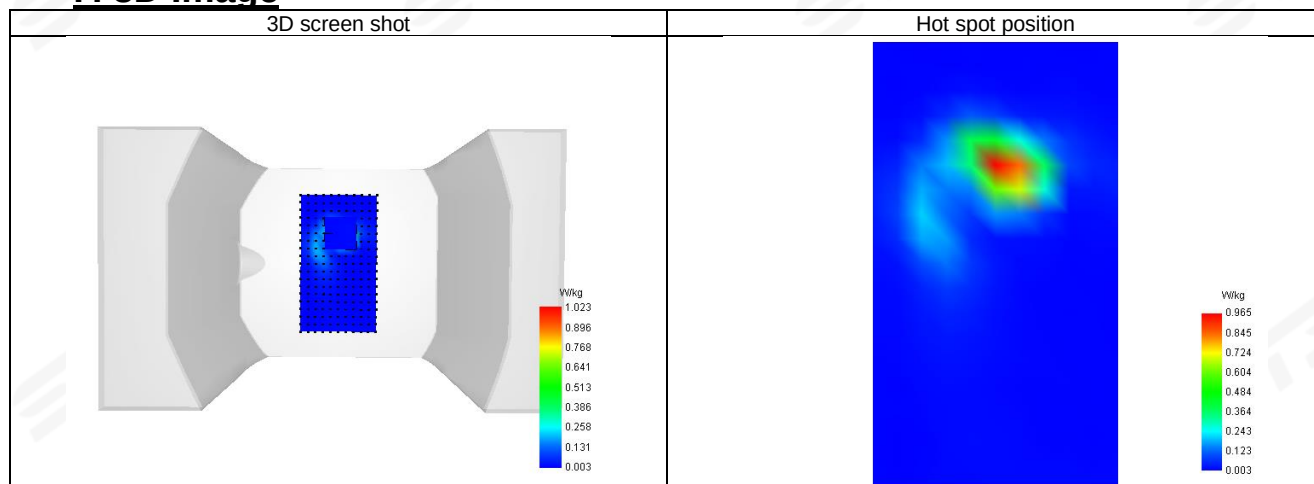



Plot 7: DUT: Tablet; EUT Model: B7 Pro,

Test Date	2026-01-31
ConvF	1.37
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm,
Phantom	Validation plane
Device Position	Back Side
Band	802.11ac-VHT20
Signal	802.11ac-VHT20 (Crest factor: 1.0)
Frequency (MHz)	5180
Relative permittivity (real part)	36.25
Conductivity (S/m)	4.64

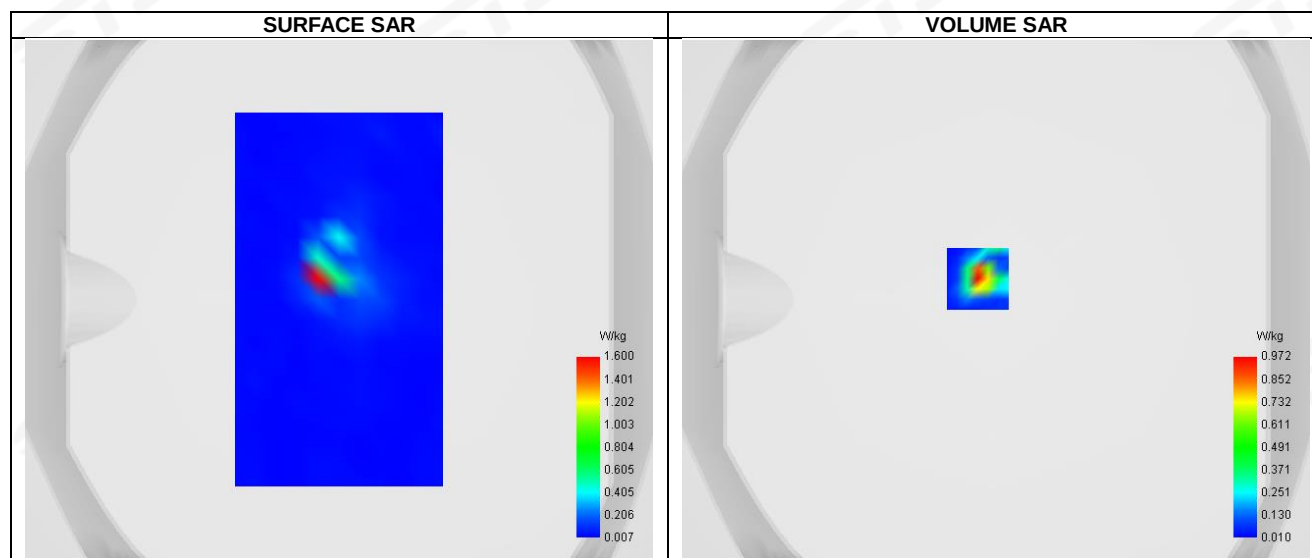


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.120
SAR 1g (W/Kg)	0.542
Horizontal validation criteria: minimum distance (mm)	6.511251
Vertical validation criteria: SAR ratio M2/M1 (%)	80.547122

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR (W/Kg)	1.205	0.972	0.531	0.609	0.340	0.111	0.064	0.041	0.050	0.037	0.021	0.029	0.029

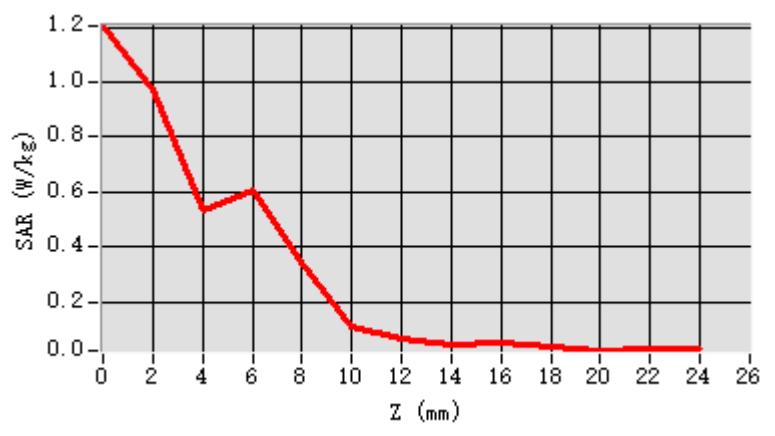


F. 3D Image

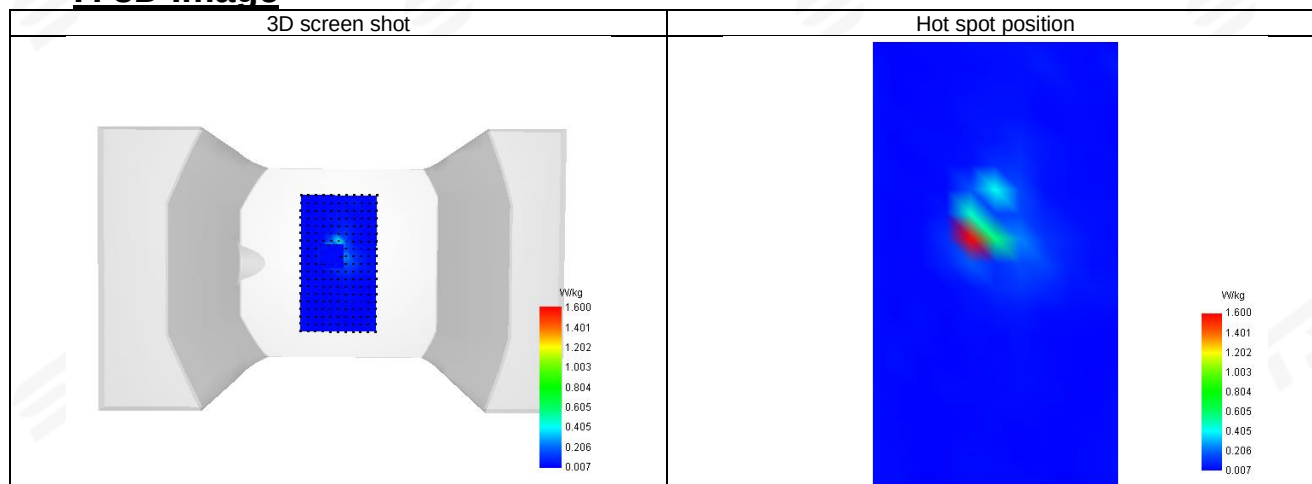



Plot 8: DUT: Tablet; EUT Model: B7 Pro,

Test Date	2026-01-31
ConvF	1.32
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm,
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a ISM
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5745
Relative permittivity (real part)	36.40
Conductivity (S/m)	5.20

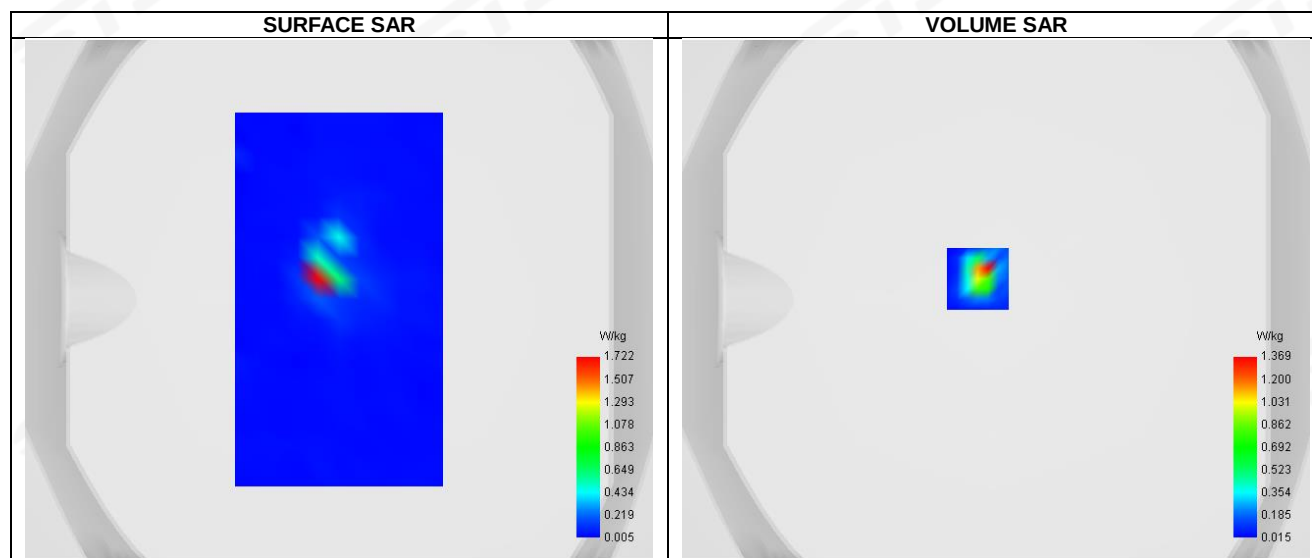


Maximum location: X=-7.00, Y=8.00 ; SAR Peak: 2.58 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.108
SAR 1g (W/Kg)	0.458
Horizontal validation criteria: minimum distance (mm)	7.141251
Vertical validation criteria: SAR ratio M2/M1 (%)	86.229144

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR (W/Kg)	2.633	1.369	0.227	0.191	0.064	0.117	0.062	0.058	0.023	0.028	0.031	0.024	0.024

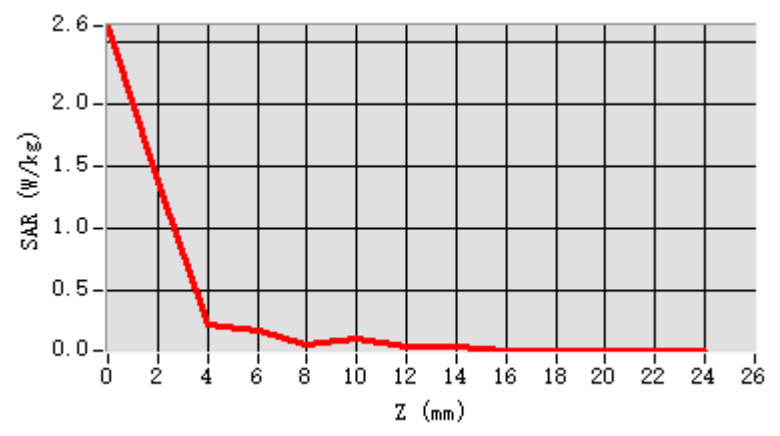

F. 3D Image

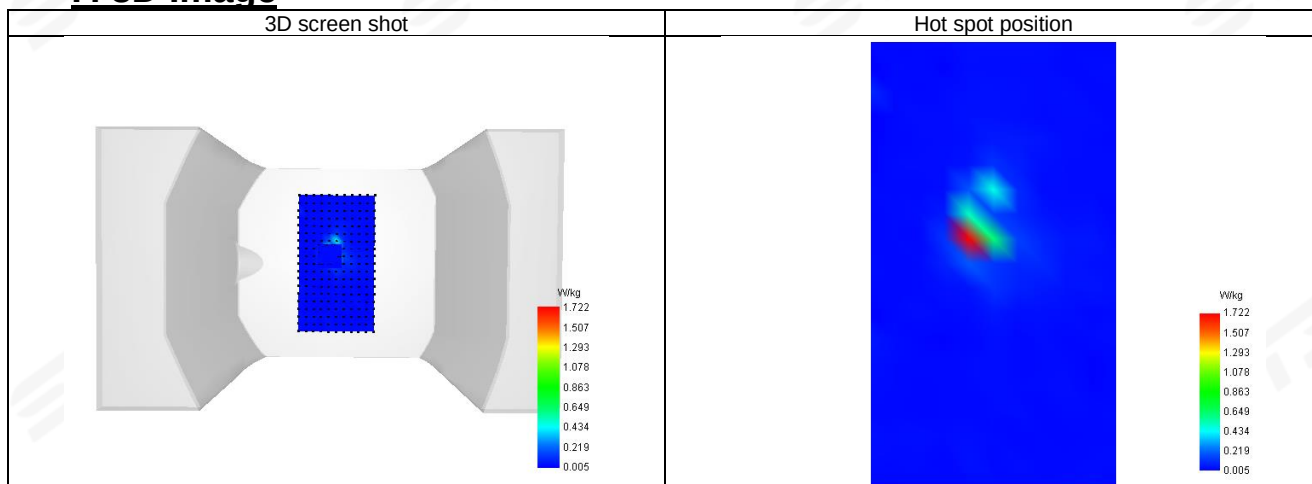



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※※END OF THE REPORT※※※※※