

Shanghai Longqian Toys CO., LTD

RF TEST REPORT

Report Type:

FCC Part 15.249 RF report

Model:

JR1602FCC

REPORT NUMBER:

220601495SHA-001

ISSUE DATE:

September 15, 2022

DOCUMENT CONTROL NUMBER:

TTRF15.249_V1 © 2019 Intertek



Applicant: Shanghai Longqian Toys CO., LTD
No. 1458, Qinwan Road, Jinshanwei Town, Jinshan District,
Shanghai, China

Manufacturer: Shanghai Longqian Toys CO., LTD
No. 1458, Qinwan Road, Jinshanwei Town, Jinshan District,
Shanghai, China

Factory: Shanghai Longqian Toys CO., LTD
No. 1458, Qinwan Road, Jinshanwei Town, Jinshan District,
Shanghai, China

FCC ID: 2A8HC-JR1602

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2020): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2013): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

PREPARED BY:**REVIEWED BY:**

Project Engineer
Sky Yang

Reviewer
Eric Li

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY.....	4
MEASUREMENT RESULT SUMMARY	5
1 GENERAL INFORMATION	6
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	6
1.2 TECHNICAL SPECIFICATION	6
1.3 DESCRIPTION OF TEST FACILITY	7
2 TEST SPECIFICATIONS.....	8
2.1 STANDARDS OR SPECIFICATION	8
2.2 MODE OF OPERATION DURING THE TEST.....	8
2.3 TEST SOFTWARE LIST	9
2.4 TEST PERIPHERALS LIST	9
2.5 TEST ENVIRONMENT CONDITION:.....	9
2.6 INSTRUMENT LIST	10
2.7 MEASUREMENT UNCERTAINTY	11
3 RADIATED EMISSION	12
3.1 LIMIT	12
3.2 MEASUREMENT PROCEDURE	12
3.3 TEST CONFIGURATION	14
3.4 TEST RESULTS OF RADIATED EMISSIONS	16
4 POWER LINE CONDUCTED EMISSION.....	19
4.1 LIMIT	19
4.2 TEST CONFIGURATION	19
4.3 MEASUREMENT PROCEDURE	20
4.4 TEST RESULTS OF POWER LINE CONDUCTED EMISSION.....	20
5 ASSIGNED BANDWIDTH (20DB BANDWIDTH)	21
5.1 LIMIT	21
5.2 MEASUREMENT PROCEDURE	21
5.3 TEST CONFIGURATION	21
5.4 THE RESULTS.....	22
6 ANTENNA REQUIREMENT.....	23

Revision History

Report No.	Version	Description	Issued Date
220602495SHA-001	Rev. 01	Initial issue of report	September 15, 2022

Measurement result summary

TEST ITEM	FCC REFERENCE	RESULT
Radiated emission	15.249 & 15.209	Pass
Power line conducted emission	15.207	NA
Assigned bandwidth (20dB bandwidth)	15.215(c)	Pass
Antenna requirement	15.203	Pass

Notes: 1: NA =Not Applicable

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	Remote Control
Type/Model:	JR1602FCC
Description of EUT:	EUT is a RF remote controller which can control corresponding electronic toy car.
Rating:	3VDC
Category of EUT:	Class B
EUT type:	☒ Table top ☐ Floor standing
Software Version:	-
Hardware Version:	-
Sample Identification No.:	0220623-102
Sample received date:	June 28, 2022
Date of test:	June 29, 2022 ~ July 08, 2022

1.2 Technical Specification

Frequency Band:	2400MHz ~ 2483.5MHz
Support Standards:	SRD
Type of Modulation:	GFSK
Channel Number:	67
Data Rate:	2Mbps
Channel Separation:	-
Antenna Information:	PCB antenna, -2.95dBi Peak gain

1.3 Description of Test Facility

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab Registration code No.: 2042B-1
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2020)

ANSI C63.10 (2013)

2.2 Mode of operation during the test

The EUT is a handheld device, so three axes (X, Y, Z) were observed while the test receiver worked as “max hold” continuously and the highest reading among the whole test procedure was recorded.

The lowest, middle and highest channel were tested as representatives.

Frequency Range (MHz) 2407~2473					
Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2407MHz	24	2430MHz	47	2453MHz
2	2408MHz	25	2431MHz	48	2454MHz
3	2409MHz	26	2432MHz	49	2455MHz
4	2410MHz	27	2433MHz	50	2456MHz
5	2411MHz	28	2434MHz	51	2457MHz
6	2412MHz	29	2435MHz	52	2458MHz
7	2413MHz	30	2436MHz	53	2459MHz
8	2414MHz	31	2437MHz	54	2460MHz
9	2415MHz	32	2438MHz	55	2461MHz
10	2416MHz	33	2439MHz	56	2462MHz
11	2417MHz	34	2440MHz	57	2463MHz
12	2418MHz	35	2441MHz	58	2464MHz
13	2419MHz	36	2442MHz	59	2465MHz
14	2420MHz	37	2443MHz	60	2466MHz
15	2421MHz	38	2444MHz	61	2467MHz
16	2422MHz	39	2445MHz	62	2468MHz
17	2423MHz	40	2446MHz	63	2469MHz
18	2424MHz	41	2447MHz	64	2470MHz
19	2425MHz	42	2448MHz	65	2471MHz
20	2426MHz	43	2449MHz	66	2472MHz
21	2427MHz	44	2450MHz	67	2473MHz
22	2428MHz	45	2451MHz		
23	2429MHz	46	2452MHz		

While testing transmitting mode of EUT, the internal modulation and continuously transmission was applied.

- 1) Radiated test mode: EUT transmitted signal with antenna.

2.3 Test software list

Test Items	Software	Manufacturer	Version
Radiated emission	SKET Auto EMC Test Software	Keleto	V3.0

2.4 Test peripherals list

Item No.	Name	Band and Model	Description

2.5 Test environment condition:

Test items	Temperature	Humidity
Radiated emission	21°C	53% RH
Assigned bandwidth (20dB bandwidth)	22°C	54% RH
Power line conducted emission	-	-

2.6 Instrument list

Conducted Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☐	Test Receiver	R&S	ESCS 30	EC 2107	2023-07-18
☐	A.M.N.	R&S	ESH2-Z5	EC 3119	2022-11-09
☐	Shielded room	Zhongyu	-	EC 2838	2023-01-11
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Test Receiver	R&S	ESIB 26	EC 3045	2022-10-19
☒	Bilog Antenna	TESEQ	CBL 6112B	EC 6411	2023-08-07
☒	Horn antenna	ETS	3117	EC 4792-1	2023-06-27
☒	Horn antenna	TOYO	HAP18-26W	EC 4792-3	2023-07-29
☐	Pre-amplifier	R&S	AFS42-00101800-25-S-42	EC5262	2023-06-04
☒	Semi-anechoic chamber	Albatross project	-	EC 3048	2023-08-21
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	PXA Signal Analyzer	Keysight	N9030A	EC 5338	2023-03-14
☒	Power sensor	Agilent	U2021XA	EC 5338-1	2023-03-14
☒	Vector Signal Generator	Agilent	N5182B	EC 5175	2023-03-14
☒	MXG Analog Signal Generator	Agilent	N5181A	EC 5338-2	2023-03-14
☒	Test Receiver	R&S	ESCI 7	EC 4501	2022-12-09
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☐	Thermo-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3783	2023-03-24
☐	Thermo-Hygrograph	ZJ1-2A	S.M.I.F.	EC 5198	2023-03-08
☒	Thermo-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3442	2023-01-03
☐	Thermo-Hygrograph	ZJ1-2A	S.M.I.F.	EC 5844	2023-03-08
☒	Pressure meter	YM3	Shanghai Mengde	EC 4620	2022-09-14

2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum peak output power	$\pm 0.74\text{dB}$
Radiated Emissions in restricted frequency bands below 1GHz	$\pm 4.90\text{dB}$
Radiated Emissions in restricted frequency bands above 1GHz	$\pm 5.02\text{dB}$
Emission outside the frequency band	$\pm 2.89\text{dB}$
Power line conducted emission	$\pm 3.19\text{dB}$

3 Radiated emission

Test result: Pass

3.1 Limit

Fundamental Frequency (MHz)	Fundamental limit (dBuV/m)	Harmonic limit (dBuV/m)
☐ 902 - 928	94	54
☒ 2400 - 2483.5	94	54
☐ 5725 - 5875	94	54
☐ 24000 - 24250	108	68

The radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

3.2 Measurement Procedure

For Radiated emission below 30MHz:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

TEST REPORT**For Radiated emission above 30MHz:**


- a) The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- 3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 3 x RBW (Duty cycle $\geq$ 98%) for Average detection (AV) at frequency above 1GHz.
- 4. All modes of operation were investigated and the worst-case emissions are reported

3.3 Test Configuration


For Radiated emission below 30MHz:

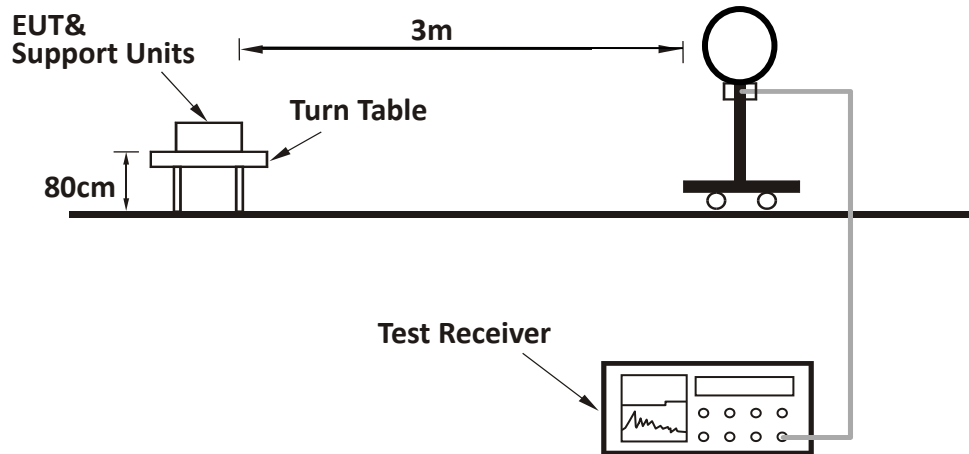

For Radiated emission 30MHz to 1GHz:

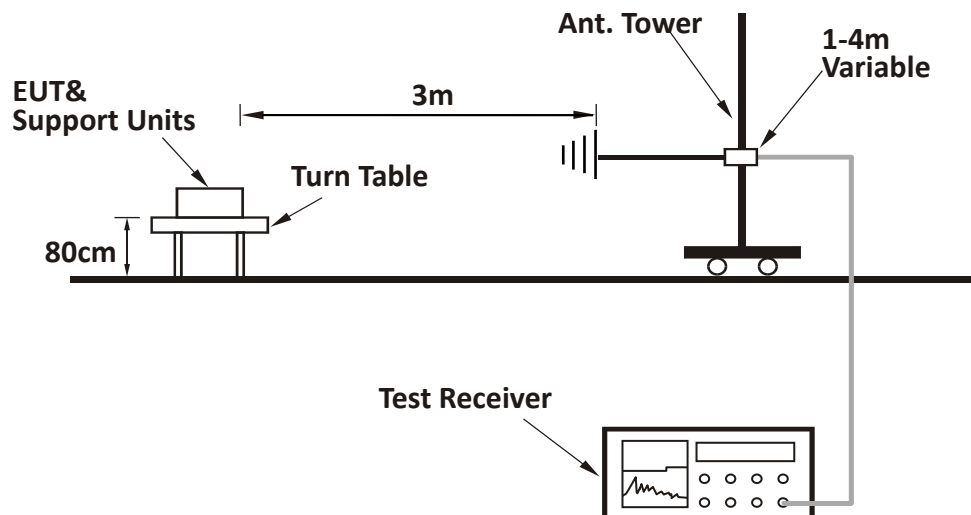

For Radiated emission above 1GHz:

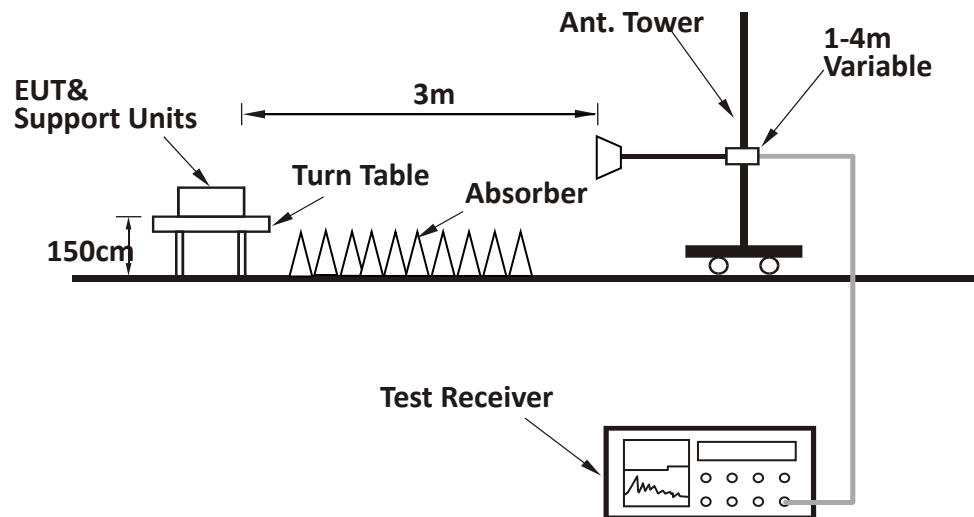


TEST REPORT

3.4 Test Results of Radiated Emissions


The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

The worst waveform from 30MHz to 1000MHz is listed as below:

Horizontal

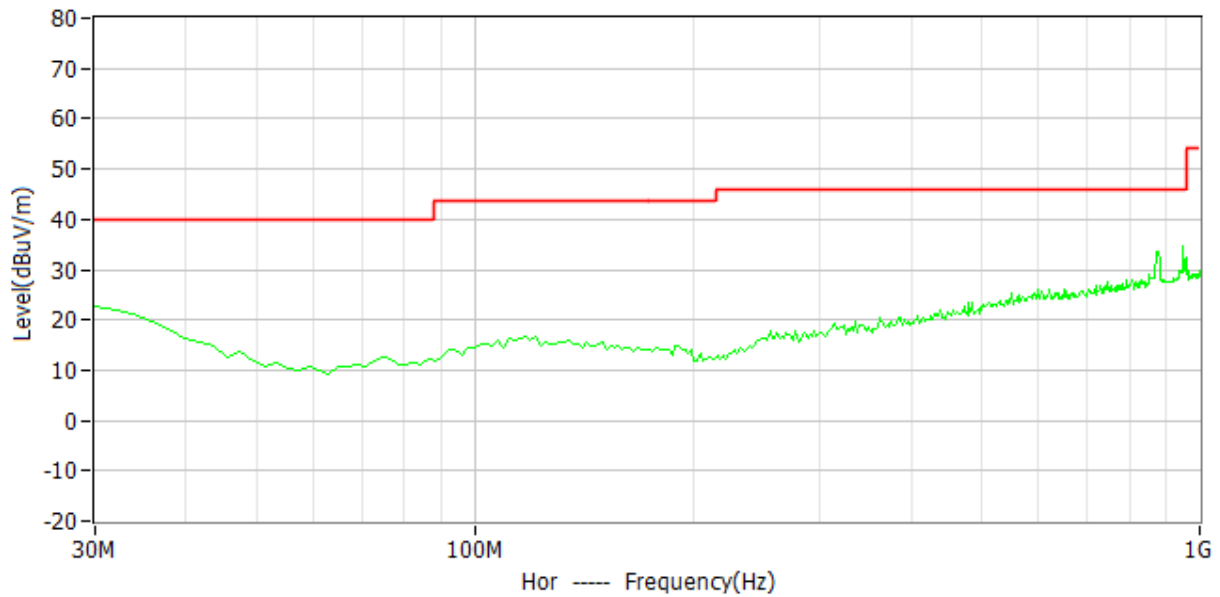

Vertical

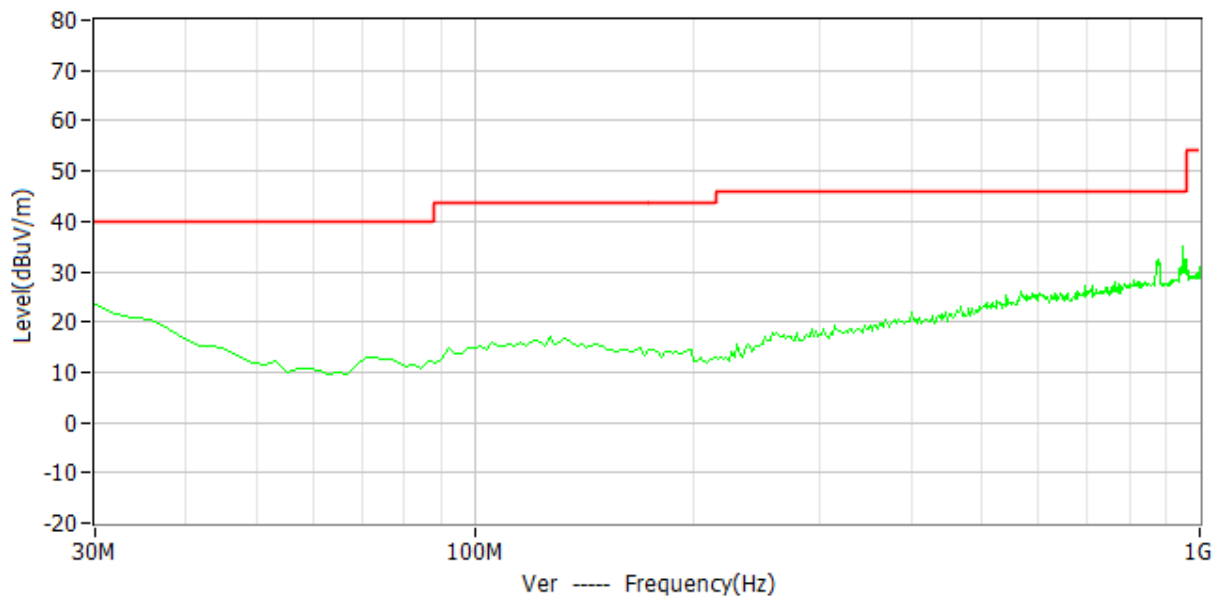

TEST REPORT

Test data below 1GHz

Antenna	Frequency (MHz)	Limit (dBuV/m)	Level (dBuV/m)	Margin (dB)	Detector
H	30.00	40.0	22.7	17.3	PK
H	480.98	46.0	23.4	22.6	PK
H	807.55	46.0	27.9	18.1	PK
V	30.00	40.0	23.6	16.4	PK
V	43.61	40.0	15.4	24.6	PK
V	469.32	46.0	23.0	23.0	PK
V	811.44	46.0	28.4	17.6	PK

Test result above 1GHz:

CH	Antenna	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2407.00	94.6	114.0	19.4	PK
	V	2407.00	89.8	114.0	24.2	PK
	H	2400.00	49.5	74.0	24.5	PK
	V	2400.00	48.9	74.0	25.1	PK
	H	4814.00	52.7	74.0	21.3	PK
	V	4814.00	51.1	74.0	22.9	PK
M	H	2440.00	91.3	114.0	22.7	PK
	V	2440.00	86.1	114.0	27.9	PK
	H	4880.00	52.0	74.0	22.0	PK
	V	4880.00	50.4	74.0	23.6	PK
H	H	2473.00	90.9	114.0	23.1	PK
	V	2473.00	85.3	114.0	28.7	PK
	H	2483.50	47.4	74.0	26.6	PK
	V	2483.50	45.6	74.0	28.4	PK
	H	4946.00	51.8	74.0	22.2	PK
	V	4946.00	50.3	74.0	23.7	PK

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (- Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.

2. Level = Original Receiver Reading + Correct Factor

3. Margin = Limit - Level

4. If the PK Level is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,

Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,

Limit = 40.00dBuV/m.

Then Correct Factor = $30.20 + 2.00 - 32.00 = 0.20\text{dB/m}$;

Level = $10\text{dBuV} + 0.20\text{dB/m} = 10.20\text{dBuV/m}$;


Margin = $40.00\text{dBuV/m} - 10.20\text{dBuV/m} = 29.80\text{dB}$.

TEST REPORT

Duty Cycle:

The test data with maximum duty cycle was listed below.

The worst Duty cycle= $0.36/3.91 = 0.0921$

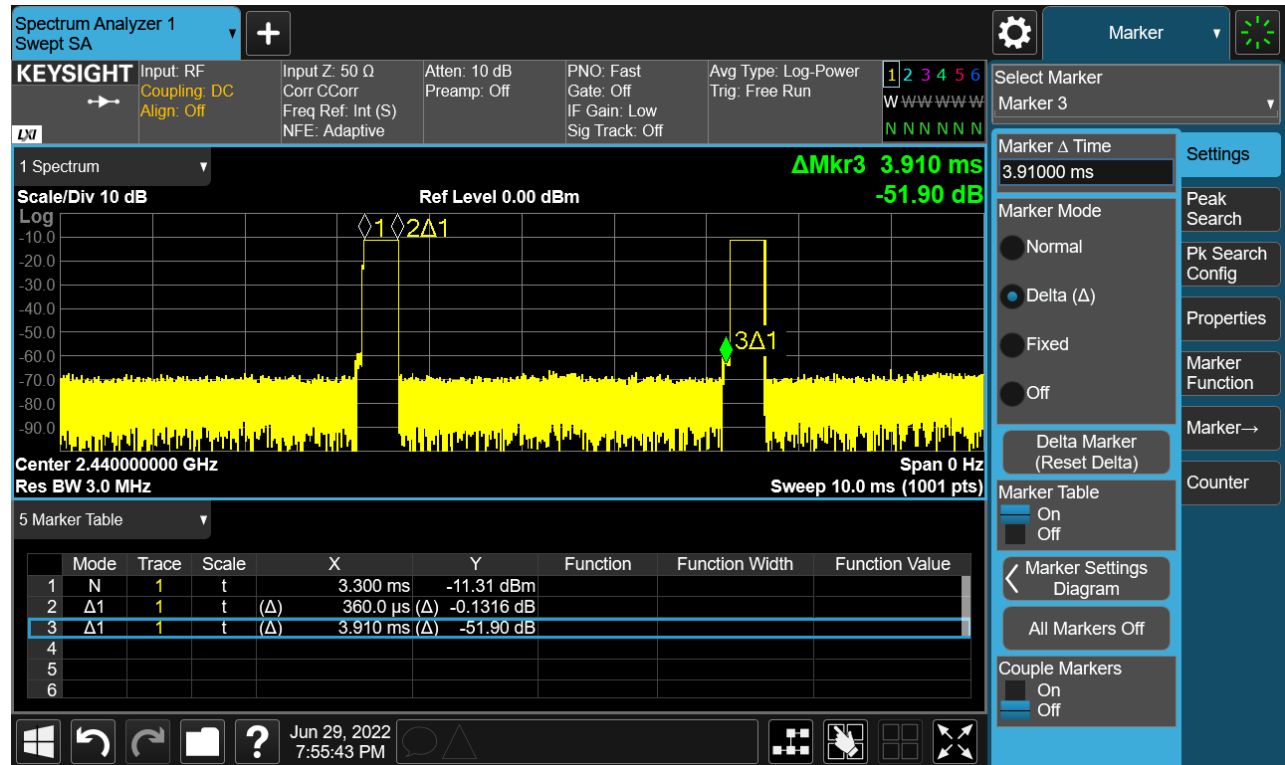

Calculating the AV value according to the duty cycle

Antenna	Frequency (MHz)	PK Reading (dBuV/m)	Correct Factor (dB)	AV Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)
H	2407.00	94.60	-20.71	73.89	94.00	20.11
V	2407.00	89.80		69.09	94.00	24.91
H	2440.00	91.30		70.59	94.00	23.41
V	2440.00	86.10		65.39	94.00	28.61
H	2473.00	90.90		70.19	94.00	23.81
V	2473.00	85.30		64.59	94.00	29.41

Remark:

- Correct Factor = $20\lg(\text{duty cycle}) = 20\lg(0.0921) = -20.71$;
- AV Reading = PK Reading + Correct Factor;
- Margin = limit - AV Reading.

4 Power line conducted emission


Test result: NA

4.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

4.2 Test Configuration

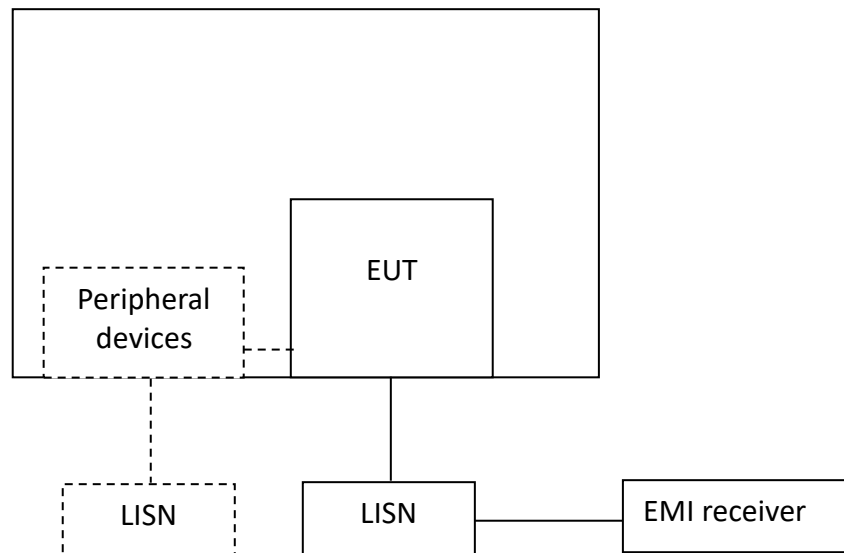

4.3 Measurement Procedure

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.

4.4 Test Results of Power line conducted emission

Test Curve:

Test Data:

5 Assigned bandwidth (20dB bandwidth)

Test result: Pass


5.1 Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emission is contained within the allocated frequency band.

5.2 Measurement Procedure

The 20dB Bandwidth is measured using the Spectrum Analyzer.
Set Span = 2 to 3 times the 20 dB bandwidth, RBW = approximately 1% of the 20 dB bandwidth, VBW>RBW, Sweep = auto, Detector = peak, Trace = max hold.
The test was performed at 2 channels (lowest and highest channel).


5.3 Test Configuration

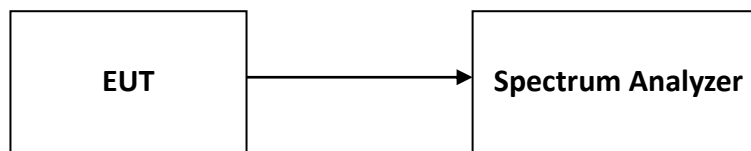


5.4 The results

Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	F _L at 20dB BW (MHz)	F _H at 20dB BW (MHz)
2407	0.949	2.071	>2400	/
2473	1.038	1.269	/	<2483.5
Limit	N/A	N/A	F _L >2400	F _H <2483.5
Result	Complied			

Channel L

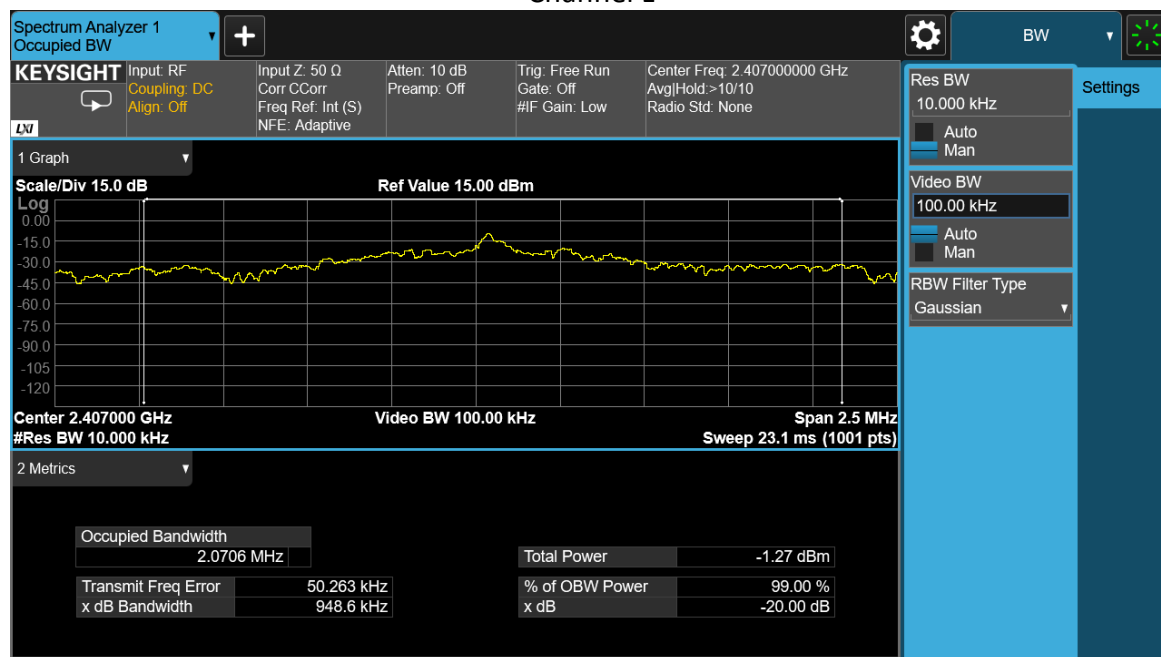

Channel H

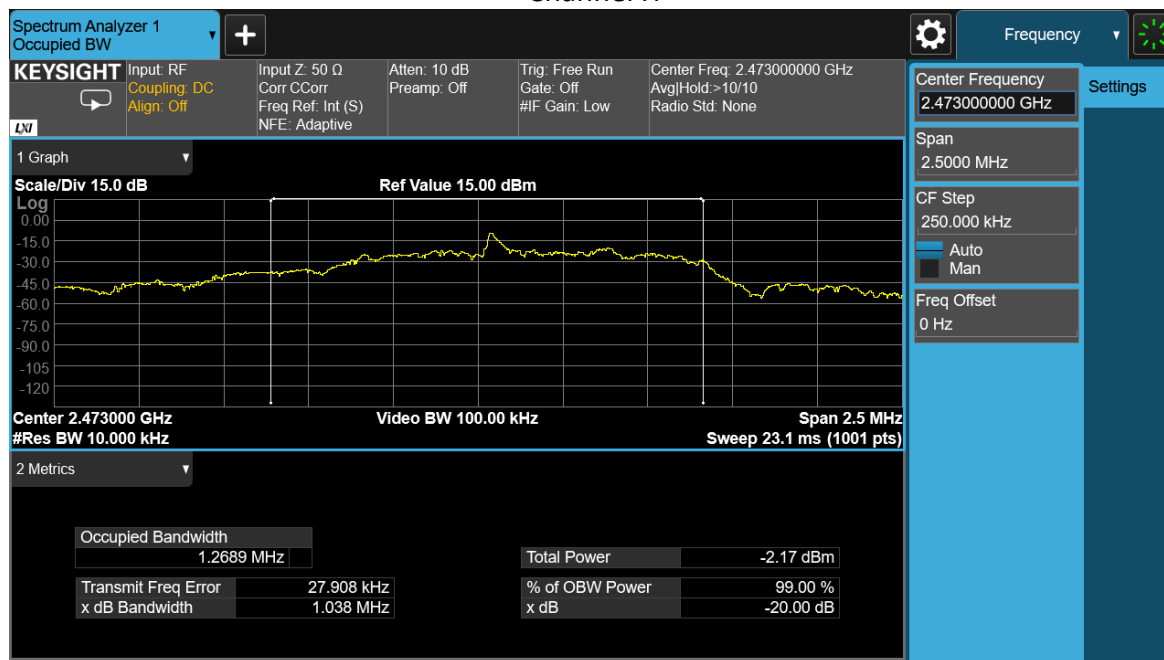

6 Antenna requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

***** END *****