intertek
Total Quality. Assured.

# SUPER ROD LIMITED

# TEST REPORT

**SCOPE OF WORK**
FCC TESTING–SRCAMV6.5

**REPORT NUMBER**
220824026SZN-001

| **ISSUE DATE** | **[REVISED DATE]** |
|---|---|
| 17 November 2022 | [----------] |

**PAGES**
73

**DOCUMENT CONTROL NUMBER**
FCC ID 247_b

© 2017 INTERTEK

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, Shenzhen, P.R. China.

Tel: (86 755) 8601 6288
Fax: (86 755) 8601 6751
www.intertek.com

Total Quality. Assured.

**TEST REPORT**

Intertek Report No.: 220824026SZN-001

# SUPER ROD LIMITED

Application
For
Certification

## FCC ID: 2A8JF-SRCAMV65

## SUPER CAM

## Model: SRCAMV6.5

## 2.4GHz Wi-Fi Transceiver

Report No.: 220824026SZN-001

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-21]

**Prepared and Checked by:**

**Draven Li**
**Project Engineer**

**Approved by:**

**Peter Kang**
**Sr. Technical Supervisor**
**Date: 17 November 2022**

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

# MEASUREMENT/TECHNICAL REPORT

This report concerns (check one) Original Grant ___X___ Class II Change _____

Equipment Type: DTS - Part 15 Digital Transmission Systems (Wi-Fi transmitter portion)

---

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes _____ No ___X___

If yes, defer until: _____
date

Company Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on that date.

---

Transition Rules Request per 15.37? Yes _____ No ___X___

If no, assumed Part 15, Subpart C for intentional radiator - the new 47 CFR [10-01-21] Edition] provision.

---

Report prepared by:

**Draven Li**
**Intertek Testing Services Shenzhen Ltd. Longhua Branch**
101, 201, Building B, No. 308 Wuhe Avenue,
Zhangkengjing Community, GuanHu Subdistrict, LongHua District, Shenzhen, P.R. China.
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6661

# Table of Contents

**1.0 Summary of Test results ..... 4**

**2.0 General Description ..... 5**

2.1 Product Description ..... 5
2.2 Related Submittal(s) Grants ..... 5
2.3 Test Methodology ..... 5
2.4 Test Facility ..... 5

**3.0 System Test Configuration ..... 6**

3.1 Justification ..... 6
3.2 EUT Exercising Software ..... 6
3.3 Special Accessories ..... 6
3.5 Equipment Modification ..... 7
3.4 Measurement Uncertainty ..... 7
3.6 Support Equipment List and Description ..... 7

**4.0 Measurement Results ..... 8**

4.1 Maximum Conducted Output Power at Antenna Terminals ..... 8
4.2 Minimum 6 dB RF Bandwidth ..... 10
4.3 Maximum Power Density Reading ..... 17
4.4 Out of Band Conducted Emissions ..... 24
4.5 Out of Band Radiated Emissions ..... 49
4.6 Transmitter Radiated Emissions in Restricted Bands ..... 50
4.7 Field Strength Calculation ..... 51
4.8 Radiated Spurious Emission ..... 52
4.9 Conducted Emission ..... 67
4.10 Radiated Emissions from Digital Section of Transceiver ..... 70
4.11 Transmitter Duty Cycle Calculation and Measurements ..... 71

**5.0 Equipment Photographs ..... 72**

**6.0 Product Labelling ..... 72**

**7.0 Technical Specifications ..... 72**

**8.0 Instruction Manual ..... 72**

**9.0 Confidentiality Request ..... 72**

**10.0 Discussion of Pulse Desensitization ..... 72**

**11.0 Test Equipment List ..... 73**

## 1.0 Summary of Test results

Applicant: SUPER ROD LIMITED
Applicant Address: Unit 12 Gilchrist Thomas Industrial Estate Blaenavon, South Wales NP4 9RL

Manufacturer: SUPER ROD LIMITED
Manufacturer Address: Unit 12 Gilchrist Thomas Industrial Estate Blaenavon, South Wales NP4 9RL

**Model: SRCAMV6.5**
**FCC ID: 2A8JF-SRCAMV65**

| TEST ITEM | REFERENCE | RESULTS |
|---|---|---|
| Max. Output power | 15.247(b)(3) | Pass |
| 6 dB Bandwidth | 15.247(a)(2) | Pass |
| Max. Power Density | 15.247(e) | Pass |
| Out of Band Antenna Conducted Emission | 15.247(d) | Pass |
| Radiated Emission in Restricted Bands | 15.247(d), 15.209, FCC 15.205 | Pass |
| AC Conducted Emission | 15.207 | Pass |
| Antenna Requirement | 15.203 | Pass (See Notes) |

Notes: The EUT uses an Integral Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.

# 2.0 General Description

## 2.1 Product Description

The Equipment Under Test (EUT) is a SUPER CAM with Wi-Fi function operating at 2412-2462MHz for 802.11b/g/n-HT20, 11 channels with 5MHz channel spacing and 2422-2452MHz for 802.11n-HT40, 7 channels with 5MHz channel spacing. The EUT is powered by DC 3.7V rechargeable battery or DC 5V by adapter. For more detailed features description, please refer to the user's manual.

Type of Modulation: BPSK, QPSK, 16QAM, 64QAM for OFDM; CCK, DQPSK, DBPSK for DSSS.
Antenna Type: Integral Antenna
Antenna Gain: 2.41dBi

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

## 2.2 Related Submittal(s) Grants

This is an application for certification of:
DTS- Part 15 Digital Transmission Systems (2.4GHz Wi-Fi transmitter portion).

## 2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013) and KDB 558074 D01 v05r02. Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

## 2.4 Test Facility

The Semi-anechoic chamber and shielded room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Longhua Branch** and located at 101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, Shenzhen, P.R. China. This test facility and site measurement data have been fully placed on file with File Number: CN1188.

## 3.0 System Test Configuration

### 3.1 Justification

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables were manipulated to produce worst case emissions. The EUT was powered by DC 3.7V fully charged battery during the test.

On 802.11b/g/n-HT20/n-HT40 mode, only one antenna is used, and all data rate were tested and only the worst case data is shown in the report.

For maximizing emissions, the EUT was rotated through 360°, the EUT was placed on the styrene turntable with 0.8m up to 1GHz and 1.5 m above 1GHz. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

The EUT and transmitting antenna was centered on the turntable.

Radiated emission measurement were performed the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

### 3.2 EUT Exercising Software

The EUT exercise program (provided by client) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The worst case configuration is used in all specified testing.

The parameters of test software setting:
During the test, Channel and power controlling software provided by the applicant was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the application and is going to be fixed on the firmware of the end product.

### 3.3 Special Accessories

N/A.

## 3.4 Equipment Modification

Any modifications installed previous to testing by SUPER ROD LIMITED will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

## 3.5 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

| Measurement Uncertainty | Uncertainty |
|---|---|
| Channel Bandwidth | ±3.46% |
| RF Output Power | ±0.31dB |
| Power Density | ±3.0dB |
| Conducted Unwanted Emission | ±0.55dB |
| Spurious emission (Above 18GHz) | ±5.3dB |
| Spurious emission (6GHz to 18GHz) | ±5.1dB |
| Radiated emission (1GHz to 6GHz) | ±4.8dB |
| Radiated emission (Up to 1GHz) | ±4.8dB |
| AC Conducted emission | ±3.6 dB |
| Temperature | ±1°C |
| Humidity | ±5% |

## 3.6 Support Equipment List and Description

| Description | Manufacturer | Model No. |
|---|---|---|
| Mobile phone | SAMSUNG | S7 |
| SD Card | SanDisk | 64G |
| Type-C cable | N/A | Unshielded, Length 15cm |
| Adapter | XiaoMi<br>(Provided by Intertek) | Model: MDY-09-EW<br>Input: 100-240~ 50/60Hz 0.35A<br>Output: 5.0V⎓2.0A MAX |

Applicant: SUPER ROD LIMITED
Date of Test: 31 August 2022 Model: SRCAMV6.5

## 4.0 Measurement Results

4.1 Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(3):

The antenna power of the EUT was connected to the input of a broadband peak RF power meter. The power meter has a video bandwidth that is greater than DTS bandwidth and utilize a fast-responding diode detector. Power was read directly at the EUT antenna terminals with cable loss added.

For antennas with gains of 6 dBi or less, maximum allowed Transmitter output is 1 watt (+30 dBm).

| IEEE 802.11b (Antenna Gain = 2.41dBi) (CCK, 1Mbps) | | |
|---|---|---|
| Frequency (MHz) | Output in dBm (Peak Reading) | Output in mWatt |
| Low Channel: 2412 | 18.42 | 69.50 |
| Middle Channel: 2437 | 17.06 | 50.82 |
| High Channel: 2462 | 17.34 | 54.20 |

| IEEE 802.11g (Antenna Gain = 2.41dBi) (16QAM, 6Mbps) | | |
|---|---|---|
| Frequency (MHz) | Output in dBm (Peak Reading) | Output in mWatt |
| Low Channel: 2412 | 24.95 | 312.61 |
| Middle Channel: 2437 | 24.65 | 291.74 |
| High Channel: 2462 | 23.95 | 248.31 |

| IEEE 802.11n-HT20 (Antenna Gain = 2.41dBi) (64QAM, 6Mbps) | | |
|---|---|---|
| Frequency (MHz) | Output in dBm (Peak Reading) | Output in mWatt |
| Low Channel: 2412 | 24.64 | 291.07 |
| Middle Channel: 2437 | 24.49 | 281.19 |
| High Channel: 2462 | 24.28 | 267.92 |

| IEEE 802.11n-HT40 (Antenna Gain = 2.41dBi) (64QAM, 13.5Mbps) | | |
|---|---|---|
| Frequency (MHz) | Output in dBm (Peak Reading) | Output in mWatt |
| Low Channel: 2422 | 24.46 | 279.25 |
| Middle Channel: 2437 | 24.89 | 308.32 |
| High Channel: 2452 | 24.55 | 285.10 |

Cable loss: 1.5 dB External Attenuation: 0 dB

Cable loss, external attenuation has been included in OFFSET function

EUT max. output level = 24.95dBm
EUT max. E.I.R.P = 24.95dBm + 2.41dBi = 27.36dBm = 544.50mW

For RF Exposure, the information is saved with filename: RF exposure.pdf.

Applicant: SUPER ROD LIMITED
Date of Test: 31 August 2022 Model: SRCAMV6.5

4.2 Minimum 6 dB RF Bandwidth, FCC Rule 15.247(a) (2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 KHz according to FCC KDB 558074 D01 v05r02. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 6 dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

Limit: The 6 dB Bandwidth is at least 500 kHz.

| IEEE 802.11b (CCK, 1Mbps) | |
|---|---|
| Frequency (MHz) | 6 dB Bandwidth (MHz) |
| 2412 | 9.120 |
| 2437 | 9.090 |
| 2462 | 8.640 |

| IEEE 802.11g (16QAM, 6Mbps) | |
|---|---|
| Frequency (MHz) | 6 dB Bandwidth (MHz) |
| 2412 | 16.380 |
| 2437 | 16.380 |
| 2462 | 16.410 |

| IEEE 802.11n-HT20 (64QAM, 6Mbps) | |
|---|---|
| Frequency (MHz) | 6 dB Bandwidth (MHz) |
| 2412 | 17.610 |
| 2437 | 17.640 |
| 2462 | 17.640 |

| IEEE 802.11n-HT40 (64QAM, 13.5Mbps) | |
|---|---|
| Frequency (MHz) | 6 dB Bandwidth (MHz) |
| 2422 | 35.940 |
| 2437 | 35.880 |
| 2452 | 36.240 |

The test plots are attached as below.

802.11b

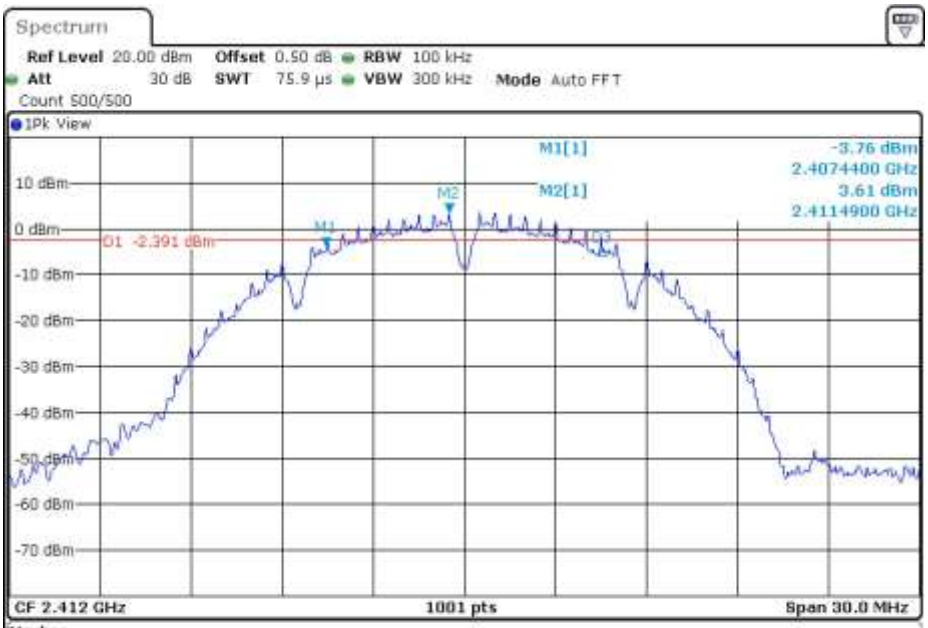


Marker

| Type | Ref | Trc | X-value | Y-value | Function | Function Result |
|---|---|---|---|---|---|---|
| M1 | | 1 | 2.40744 GHz | -3.76 dBm | | |
| M2 | | 1 | 2.41149 GHz | 3.61 dBm | | |
| D3 | M1 | 1 | 9.12 MHz | -0.26 dB | | |

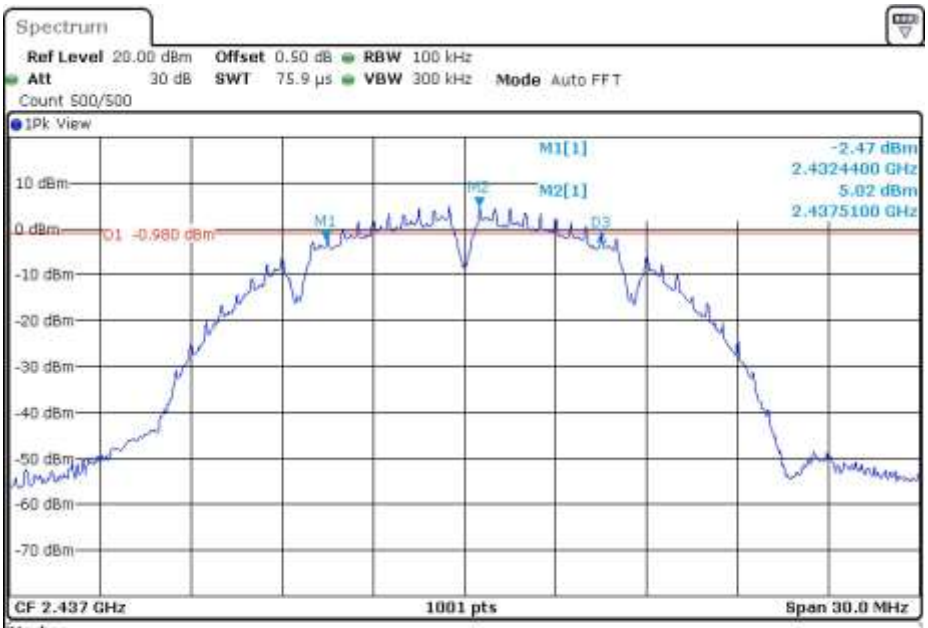


Marker

| Type | Ref | Trc | X-value | Y-value | Function | Function Result |
|---|---|---|---|---|---|---|
| M1 | | 1 | 2.43244 GHz | -2.47 dBm | | |
| M2 | | 1 | 2.43751 GHz | 5.02 dBm | | |
| D3 | M1 | 1 | 9.09 MHz | 1.48 dB | | |

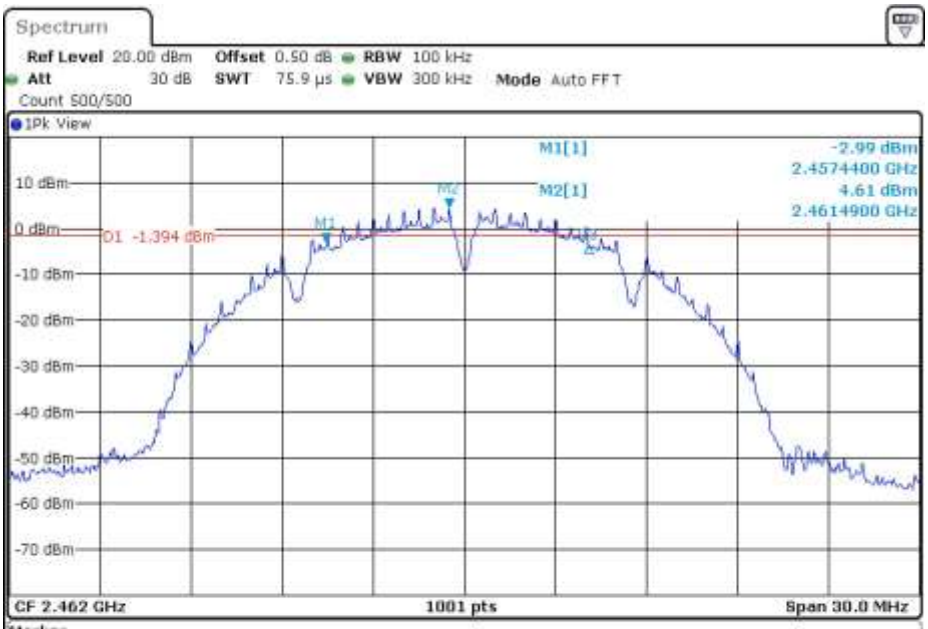


Marker

| Type | Ref | Trc | X-value | Y-value | Function | Function Result |
|---|---|---|---|---|---|---|
| M1 | | 1 | 2.45744 GHz | -2.99 dBm | | |
| M2 | | 1 | 2.46149 GHz | 4.61 dBm | | |
| D3 | M1 | 1 | 8.64 MHz | -0.54 dB | | |

802.11g

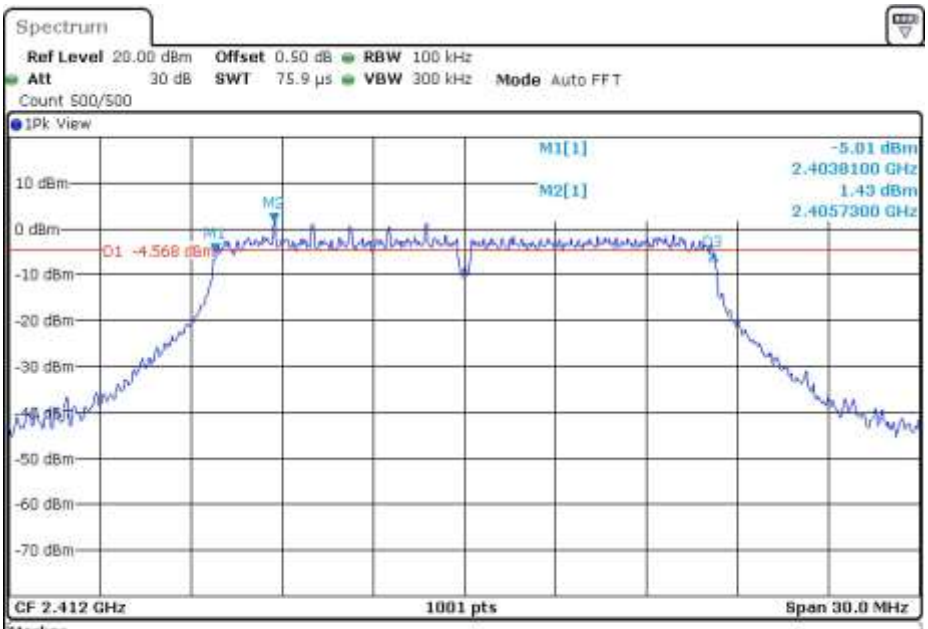


Marker

| Type | Ref | Trc | X-value | Y-value | Function | Function Result |
|---|---|---|---|---|---|---|
| M1 | | 1 | 2.40381 GHz | -5.01 dBm | | |
| M2 | | 1 | 2.40573 GHz | 1.43 dBm | | |
| D3 | M1 | 1 | 16.38 MHz | -0.22 dB | | |

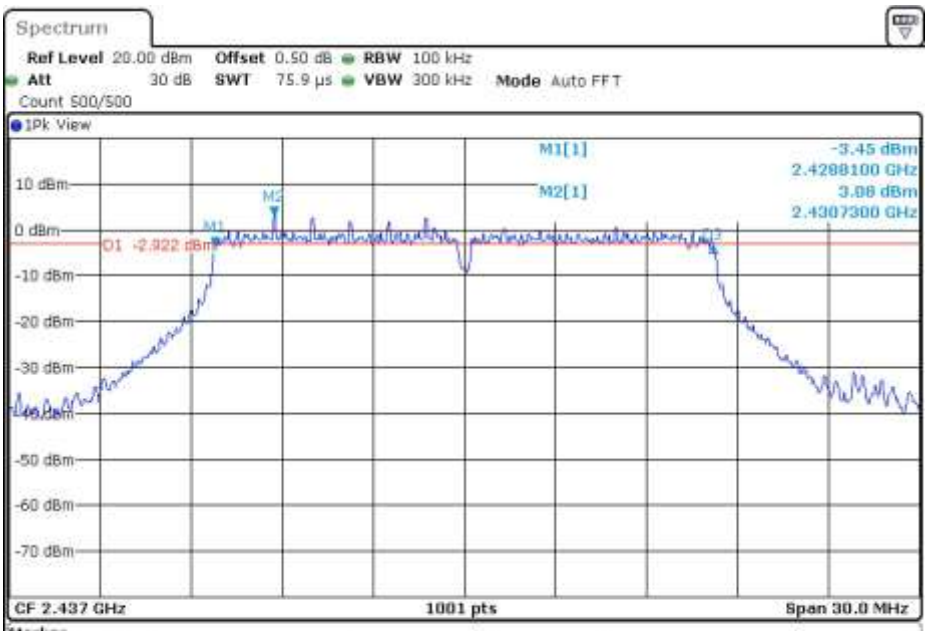


Marker

| Type | Ref | Trc | X-value | Y-value | Function | Function Result |
|---|---|---|---|---|---|---|
| M1 | | 1 | 2.42881 GHz | -3.45 dBm | | |
| M2 | | 1 | 2.43073 GHz | 3.08 dBm | | |
| D3 | M1 | 1 | 16.38 MHz | 0.07 dB | | |

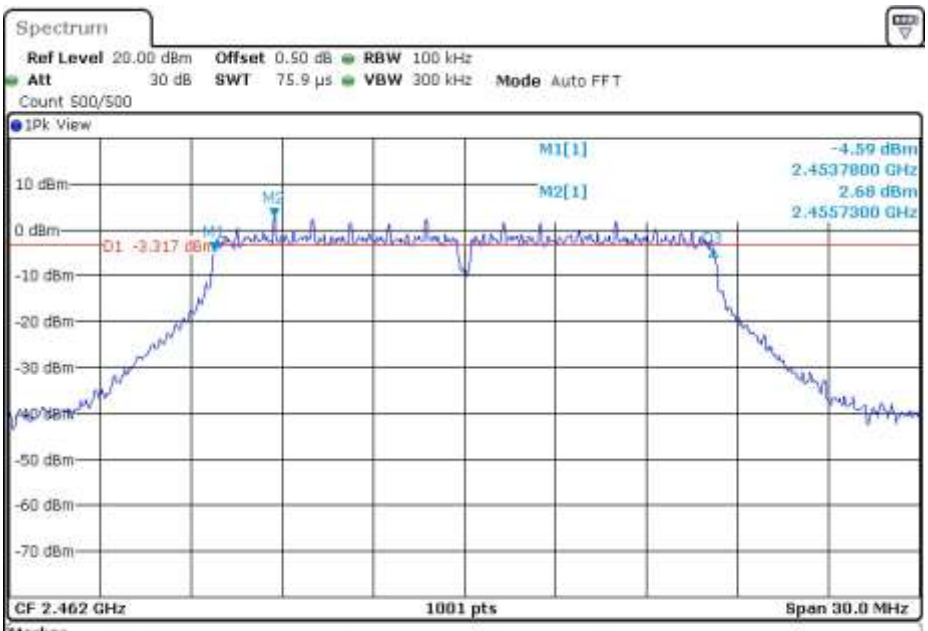


Marker

| Type | Ref | Trc | X-value | Y-value | Function | Function Result |
|---|---|---|---|---|---|---|
| M1 | | 1 | 2.45378 GHz | -4.59 dBm | | |
| M2 | | 1 | 2.45573 GHz | 2.68 dBm | | |
| D3 | M1 | 1 | 16.41 MHz | 0.40 dB | | |

802.11n-HT20

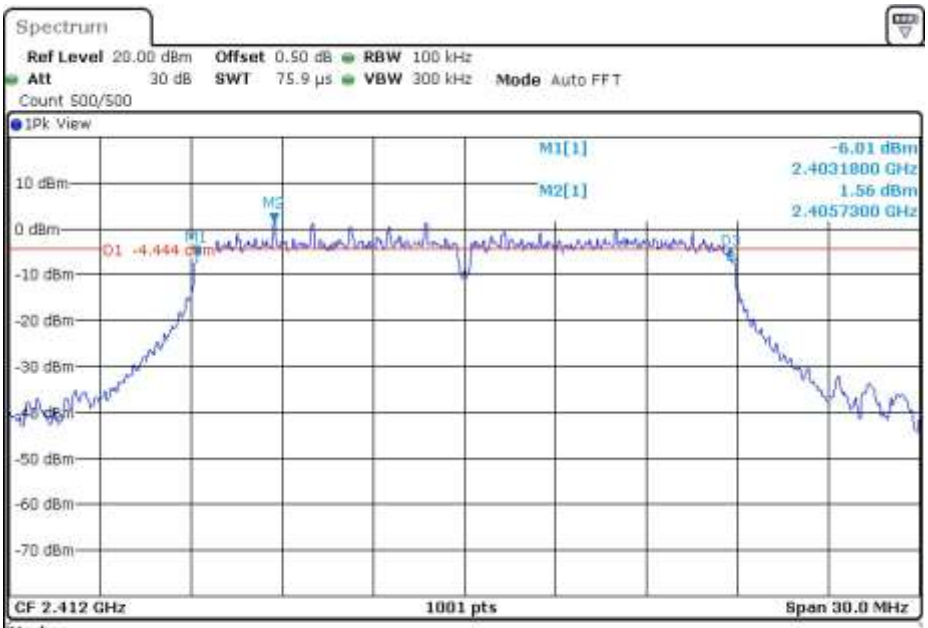


Marker

| Type | Ref | Trc | X-value | Y-value | Function | Function Result |
|---|---|---|---|---|---|---|
| M1 | | 1 | 2.40318 GHz | -6.01 dBm | | |
| M2 | | 1 | 2.40573 GHz | 1.56 dBm | | |
| D3 | M1 | 1 | 17.61 MHz | 1.21 dB | | |

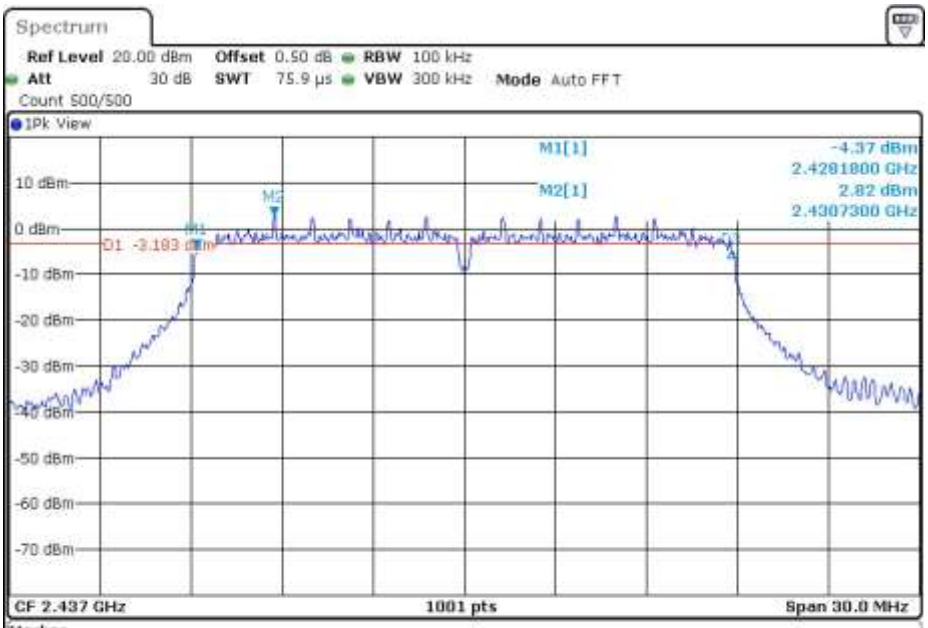


Marker

| Type | Ref | Trc | X-value | Y-value | Function | Function Result |
|---|---|---|---|---|---|---|
| M1 | | 1 | 2.42818 GHz | -4.37 dBm | | |
| M2 | | 1 | 2.43073 GHz | 2.82 dBm | | |
| D3 | M1 | 1 | 17.64 MHz | -0.23 dB | | |

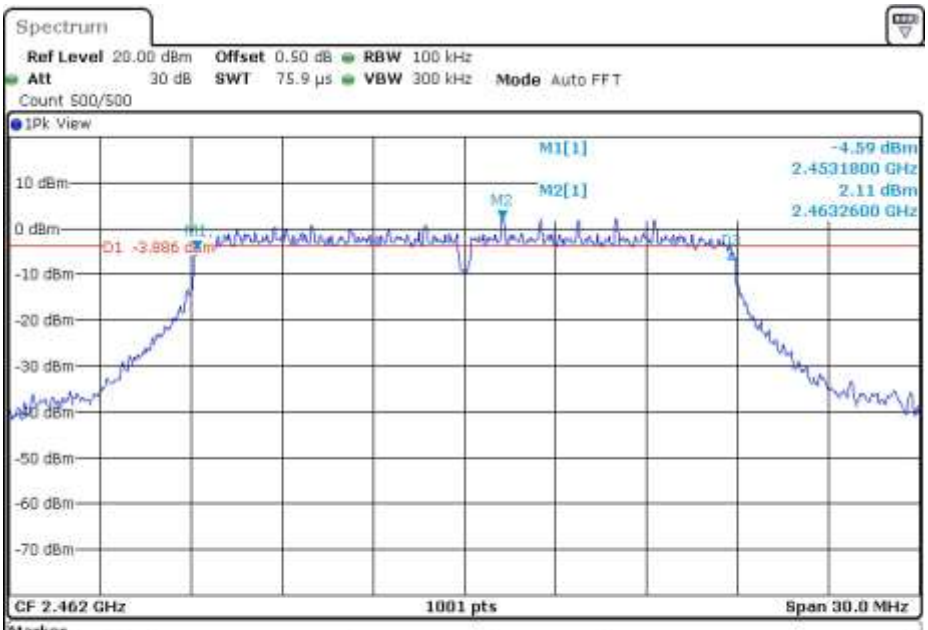


Marker

| Type | Ref | Trc | X-value | Y-value | Function | Function Result |
|---|---|---|---|---|---|---|
| M1 | | 1 | 2.45318 GHz | -4.59 dBm | | |
| M2 | | 1 | 2.46326 GHz | 2.11 dBm | | |
| D3 | M1 | 1 | 17.64 MHz | -0.17 dB | | |

802.11n-HT40

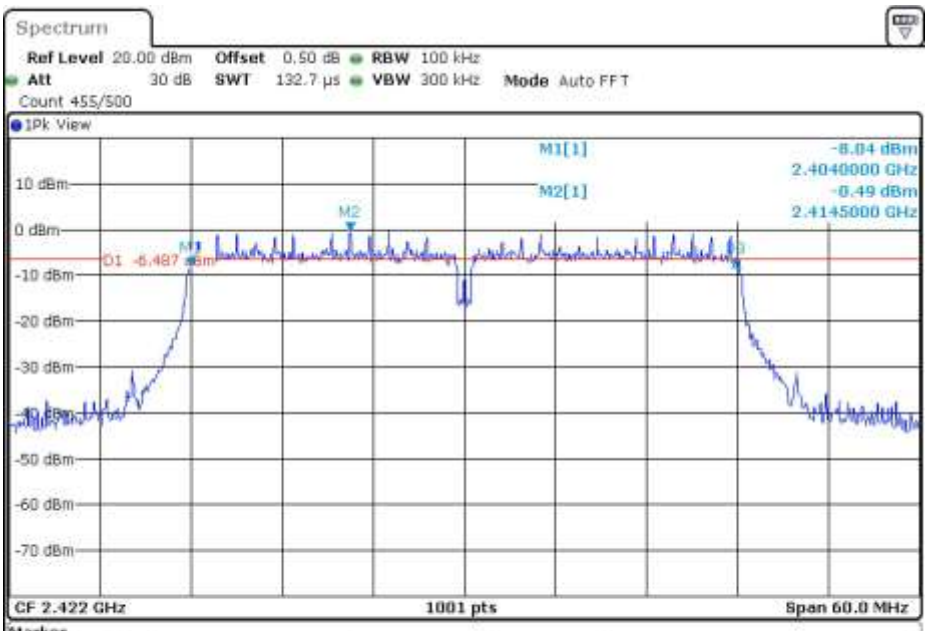


Marker

| Type | Ref | Trc | X-value | Y-value | Function | Function Result |
|---|---|---|---|---|---|---|
| M1 | | 1 | 2.404 GHz | -8.04 dBm | | |
| M2 | | 1 | 2.4145 GHz | -0.49 dBm | | |
| D3 | M1 | 1 | 35.94 MHz | 1.50 dB | | |

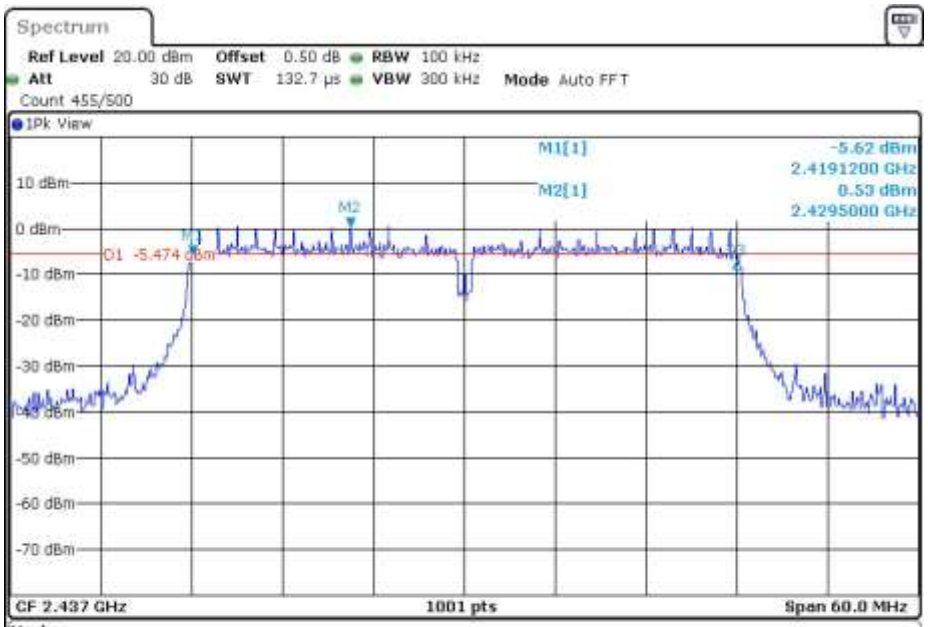


Marker

| Type | Ref | Trc | X-value | Y-value | Function | Function Result |
|---|---|---|---|---|---|---|
| M1 | | 1 | 2.41912 GHz | -5.62 dBm | | |
| M2 | | 1 | 2.4295 GHz | 0.53 dBm | | |
| D3 | M1 | 1 | 35.88 MHz | -1.49 dB | | |

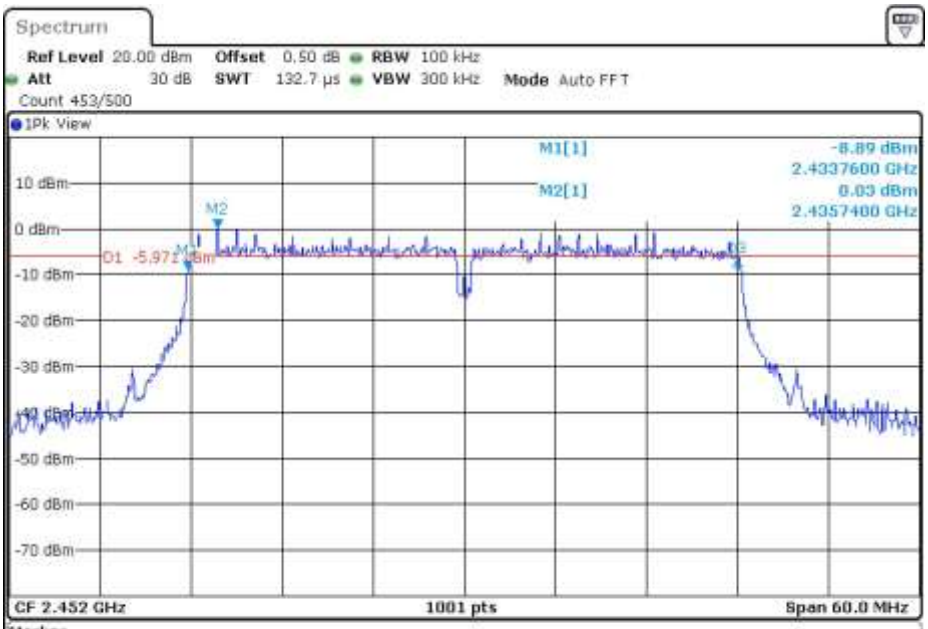


Marker

| Type | Ref | Trc | X-value | Y-value | Function | Function Result |
|---|---|---|---|---|---|---|
| M1 | | 1 | 2.43376 GHz | -8.89 dBm | | |
| M2 | | 1 | 2.43574 GHz | 0.03 dBm | | |
| D3 | M1 | 1 | 36.24 MHz | 2.34 dB | | |

Applicant: SUPER ROD LIMITED
Date of Test: 31 August 2022 Model: SRCAMV6.5

4.3 Maximum Power Density Reading, FCC Rule 15.247(e):

The Measurement Procedure PKPSD was set according to the FCC KDB 558074 D01 v05r02.

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

Limit: The Power Density does not exceed 8dBm/3kHz.

| IEEE 802.11b (CCK, 1Mbps) | |
|---|---|
| Frequency (MHz) | Power Density with RBW 3KHz |
| 2412 | -9.49 |
| 2437 | -7.78 |
| 2462 | -7.94 |

| IEEE 802.11g (16QAM, 6Mbps) | |
|---|---|
| Frequency (MHz) | Power Density with RBW 3KHz |
| 2412 | -11.9 |
| 2437 | -8.76 |
| 2462 | -12.09 |

| IEEE 802.11n-HT20 (64QAM, 6Mbps) | |
|---|---|
| Frequency (MHz) | Power Density with RBW 3KHz |
| 2412 | -12.41 |
| 2437 | -11.75 |
| 2462 | -11.34 |

| IEEE 802.11n-HT40 (64QAM, 13.5Mbps) | |
|---|---|
| Frequency (MHz) | Power Density with RBW 3KHz |
| 2422 | -22.84 |
| 2437 | -21.8 |
| 2452 | -23.71 |

The test plots are attached as below.

802.11b

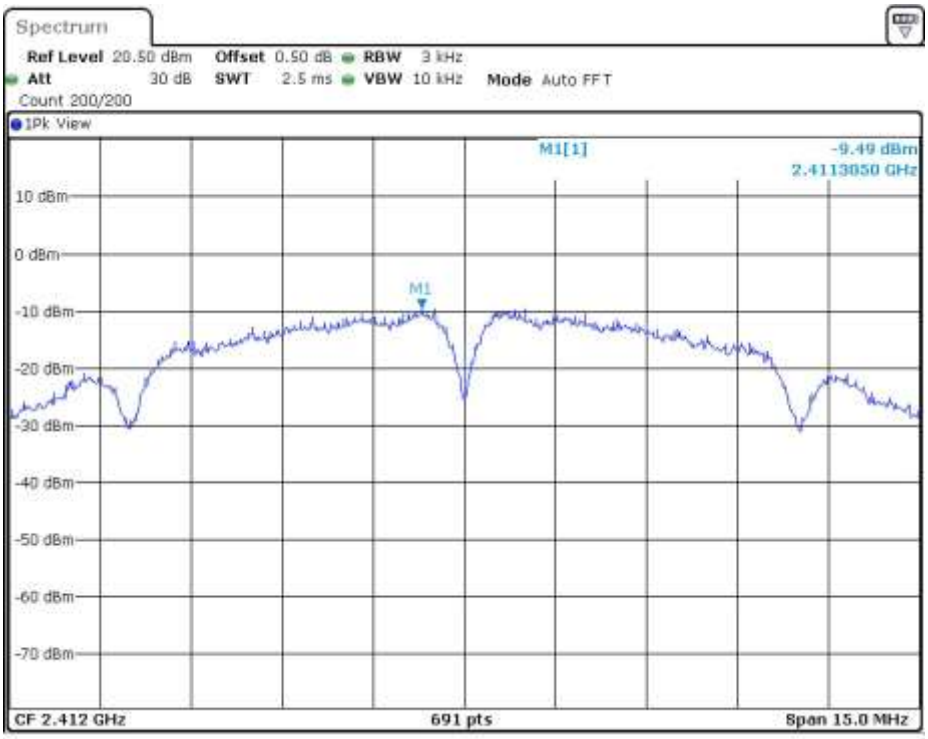
Spectrum
Ref Level 20.50 dBm Offset 0.50 dB RBW 3 kHz
Att 30 dB SWT 2.5 ms VBW 10 kHz Mode Auto FFT
Count 200/200
1Pk View
M1[1] -9.49 dBm
2.4113050 GHz
10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm
M1
CF 2.412 GHz
691 pts
Span 15.0 MHz

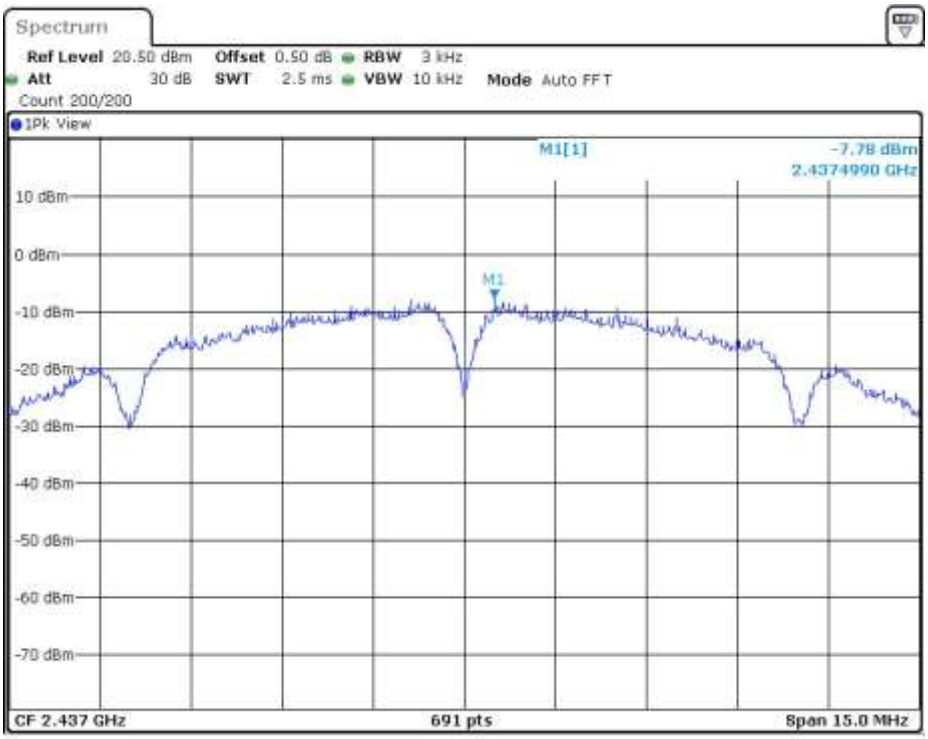
Spectrum
Ref Level 20.50 dBm Offset 0.50 dB RBW 3 kHz
Att 30 dB SWT 2.5 ms VBW 10 kHz Mode Auto FFT
Count 200/200
1Pk View
M1[1] -7.78 dBm
2.4374990 GHz
10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm
M1
CF 2.437 GHz
691 pts
Span 15.0 MHz

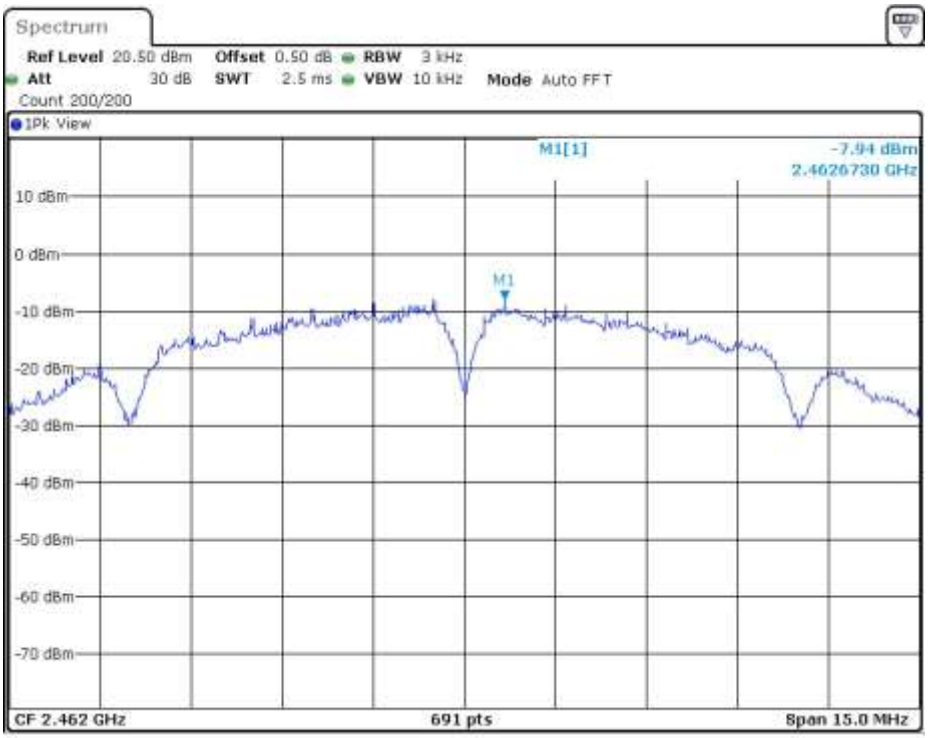
Spectrum
Ref Level 20.50 dBm Offset 0.50 dB RBW 3 kHz
Att 30 dB SWT 2.5 ms VBW 10 kHz Mode Auto FFT
Count 200/200
1Pk View
M1[1] -7.94 dBm
2.4626730 GHz
10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm
M1
CF 2.462 GHz
691 pts
Span 15.0 MHz

802.11g

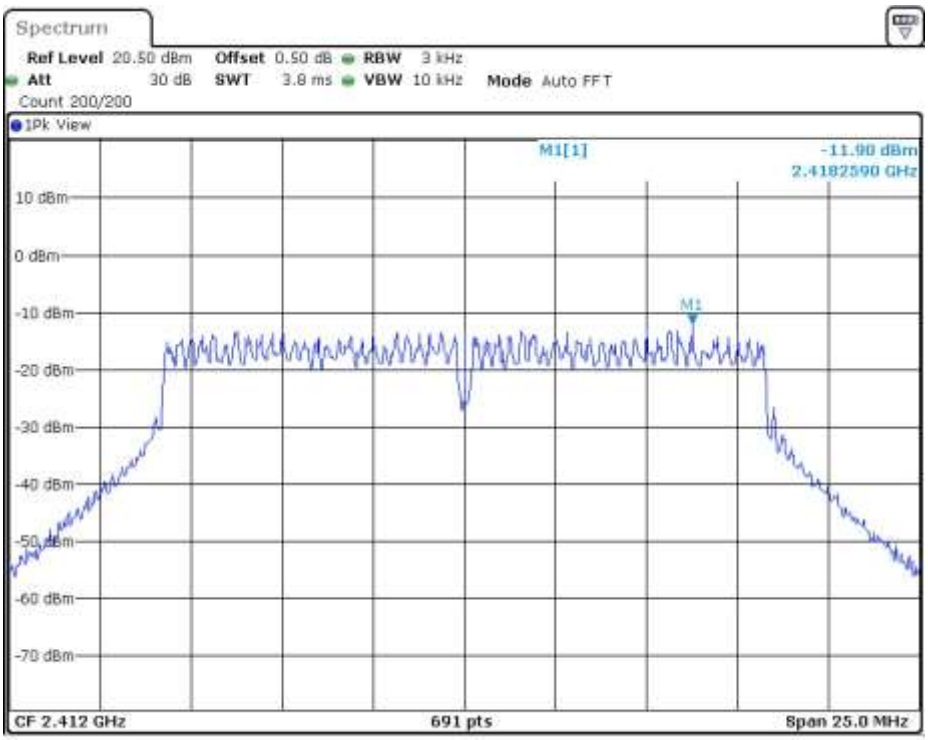
Spectrum
Ref Level 20.50 dBm Offset 0.50 dB RBW 3 kHz
Att 30 dB SWT 3.8 ms VBW 10 kHz Mode Auto FFT
Count 200/200
1Pk View
M1[1] -11.90 dBm
2.4182590 GHz
10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm
M1
CF 2.412 GHz
691 pts
Span 25.0 MHz

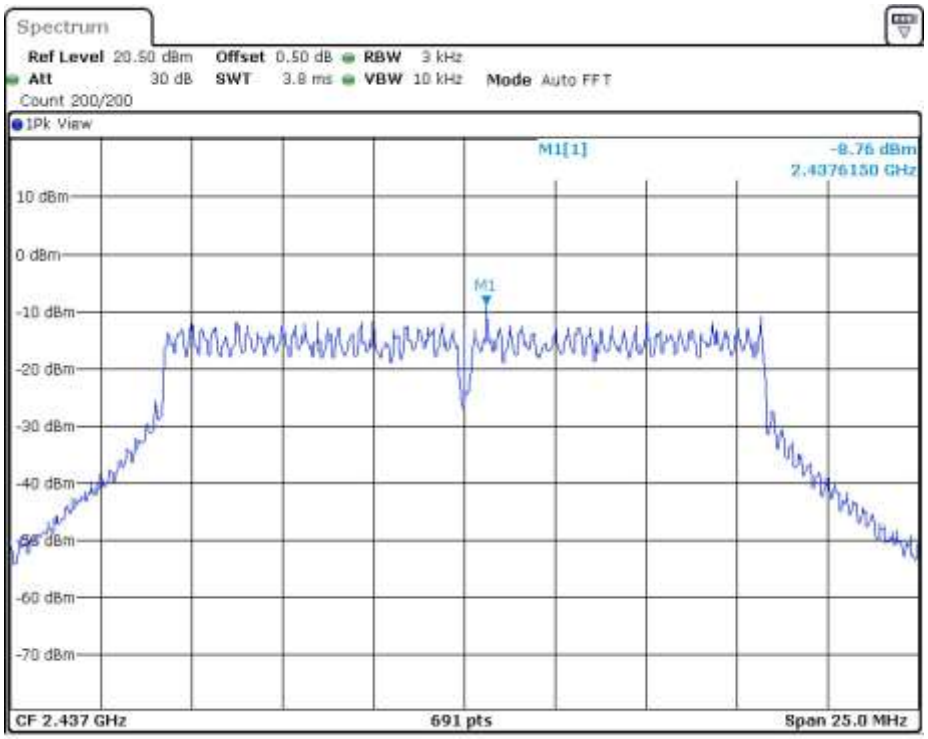
Spectrum
Ref Level 20.50 dBm Offset 0.50 dB RBW 3 kHz
Att 30 dB SWT 3.8 ms VBW 10 kHz Mode Auto FFT
Count 200/200
1Pk View
M1[1] -8.76 dBm
2.4376150 GHz
10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm
M1
CF 2.437 GHz
691 pts
Span 25.0 MHz

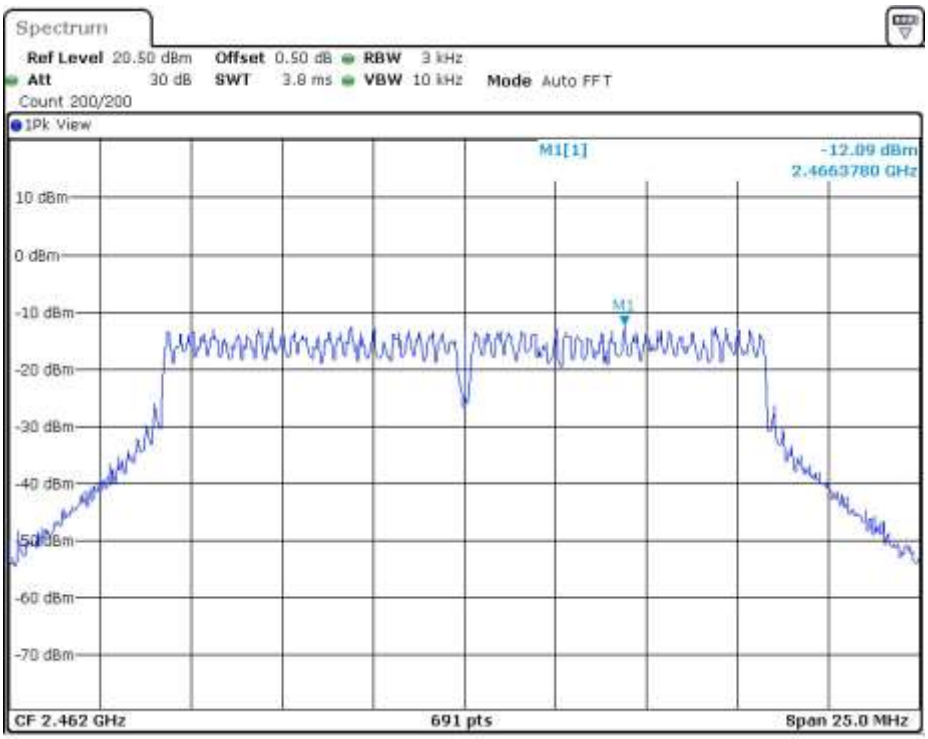
Spectrum
Ref Level 20.50 dBm Offset 0.50 dB RBW 3 kHz
Att 30 dB SWT 3.8 ms VBW 10 kHz Mode Auto FFT
Count 200/200
1Pk View
M1[1] -12.09 dBm
2.4663780 GHz
10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm
M1
CF 2.462 GHz
691 pts
Span 25.0 MHz

802.11n-HT20

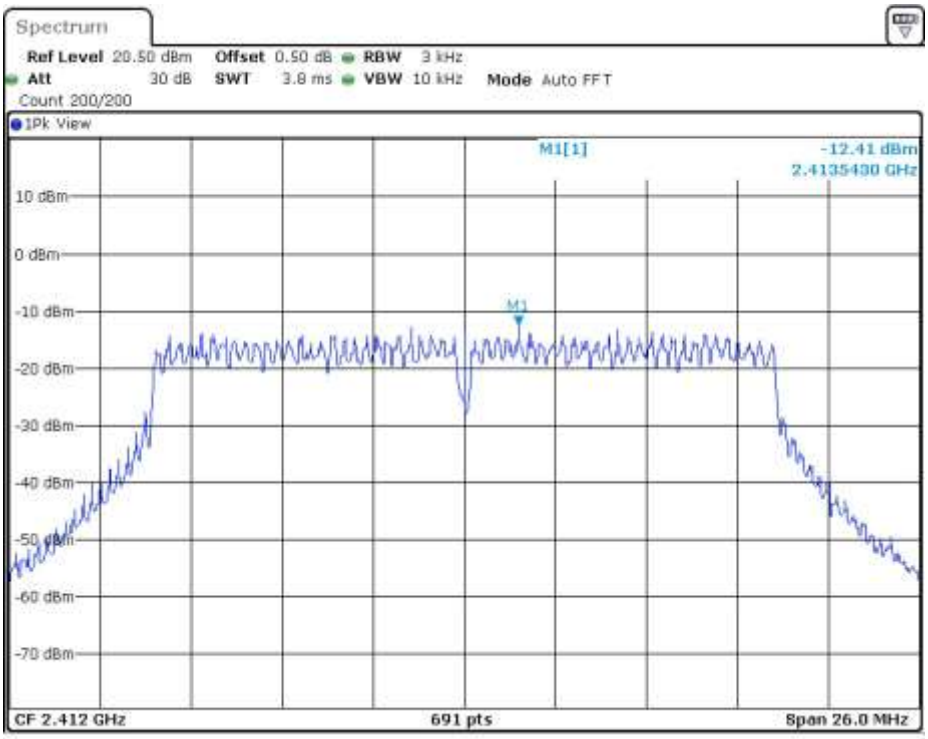
Spectrum
Ref Level 20.50 dBm Offset 0.50 dB RBW 3 kHz
Att 30 dB SWT 3.8 ms VBW 10 kHz Mode Auto FFT
Count 200/200
1Pk View
M1[1] -12.41 dBm
2.4135430 GHz
10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm
CF 2.412 GHz
691 pts
Span 26.0 MHz

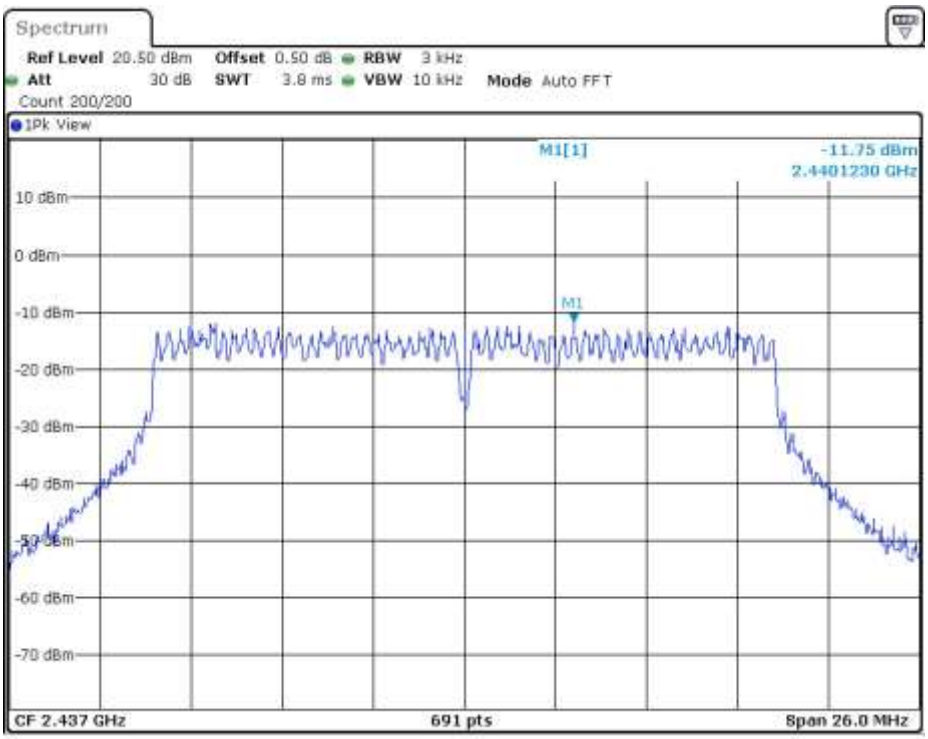
Spectrum
Ref Level 20.50 dBm Offset 0.50 dB RBW 3 kHz
Att 30 dB SWT 3.8 ms VBW 10 kHz Mode Auto FFT
Count 200/200
1Pk View
M1[1] -11.75 dBm
2.4401230 GHz
10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm
CF 2.437 GHz
691 pts
Span 26.0 MHz

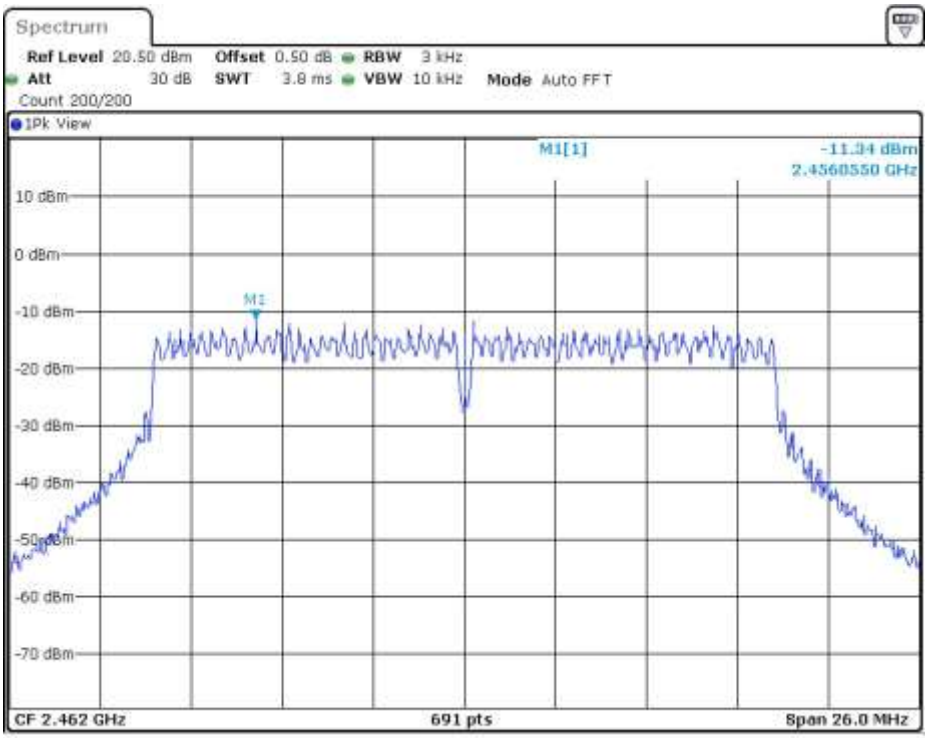
Spectrum
Ref Level 20.50 dBm Offset 0.50 dB RBW 3 kHz
Att 30 dB SWT 3.8 ms VBW 10 kHz Mode Auto FFT
Count 200/200
1Pk View
M1[1] -11.34 dBm
2.4560550 GHz
10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm
M1
CF 2.462 GHz
691 pts
Span 26.0 MHz

802.11n-HT40

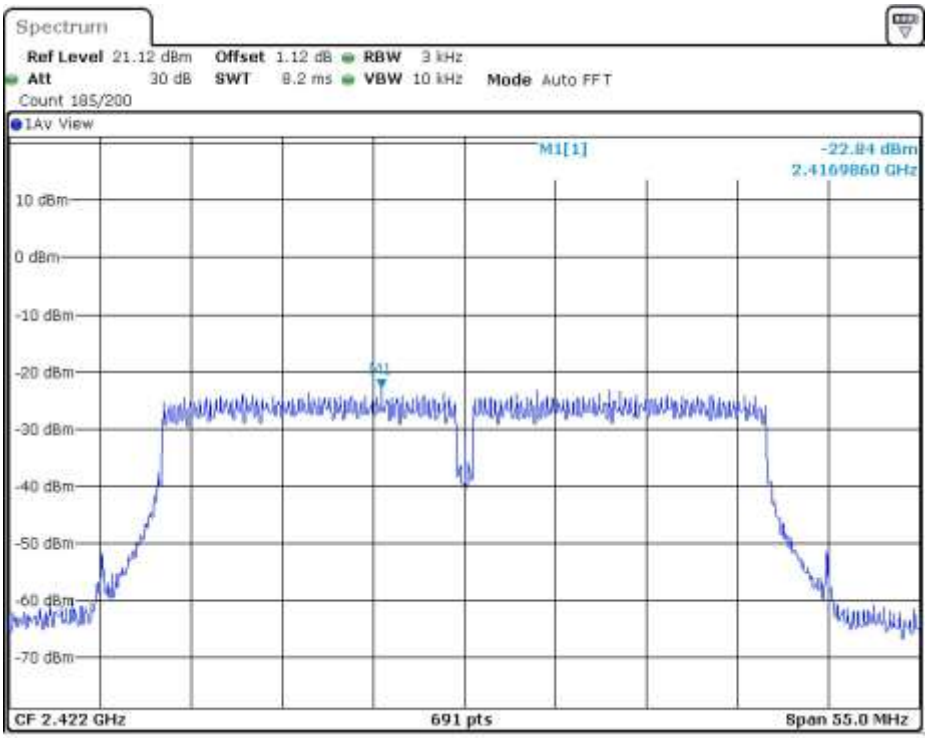
Spectrum
Ref Level 21.12 dBm Offset 1.12 dB RBW 3 kHz
Att 30 dB SWT 8.2 ms VBW 10 kHz Mode Auto FFT
Count 185/200
1Av View
M1[1] -22.84 dBm
2.4169860 GHz
10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm
M1
CF 2.422 GHz
691 pts
Span 55.0 MHz

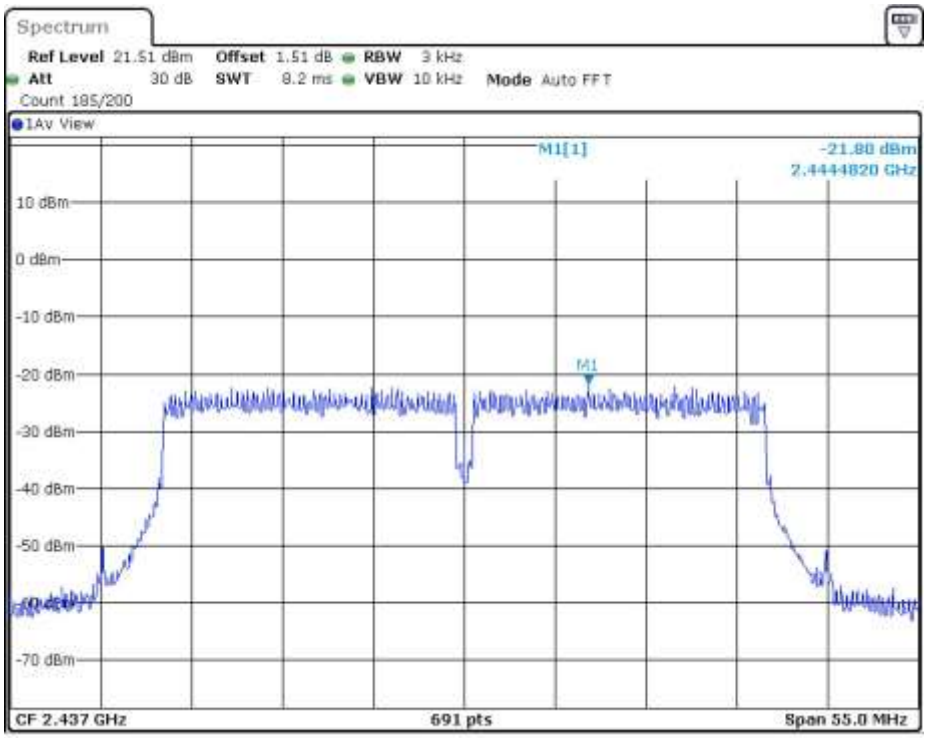
Spectrum
Ref Level 21.51 dBm Offset 1.51 dB RBW 3 kHz
Att 30 dB SWT 8.2 ms VBW 10 kHz Mode Auto FFT
Count 185/200
1Av View
M1[1] -21.80 dBm
2.4444820 GHz
10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-70 dBm
M1
CF 2.437 GHz
691 pts
Span 55.0 MHz

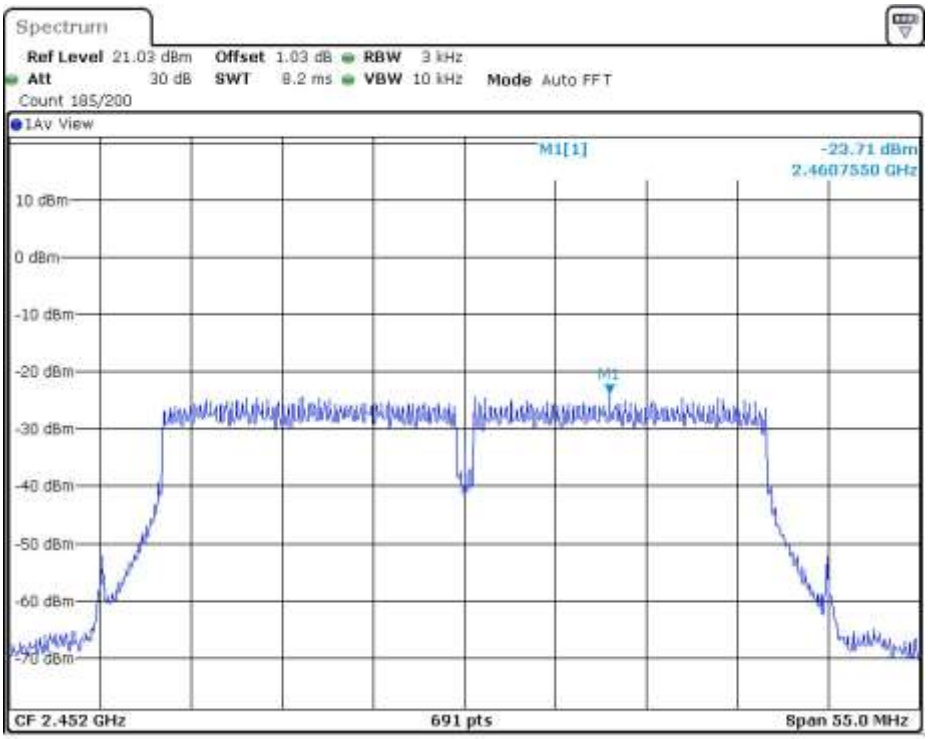
Spectrum
Ref Level 21.03 dBm Offset 1.03 dB RBW 3 kHz
Att 30 dB SWT 8.2 ms VBW 10 kHz Mode Auto FFT
Count 185/200
1Av View
M1[1] -23.71 dBm
2.4607550 GHz
10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm
M1
CF 2.452 GHz
691 pts
Span 55.0 MHz

## 4.4 Out of Band Conducted Emissions, FCC Rule 15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. The Measurement Procedure was set according to the FCC KDB 558074 D01 v05r02.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the passband.

Refer to the attached test plots for out of band conducted emissions data with rate of 1Mbps for 802.11b and 6Mbps for 802.11g and 6Mbps for 802.11n-HT20 and 13.5Mbps for 802.11n-HT40.

The test plots showed all spurious emission up to the tenth harmonic were measured and they were found to be at least 20 dB below the highest level of the desired power in the passband.

The test plots are attached as below.

802.11b
Channel 01 (2412MHz) Reference Level: 3.79dBm

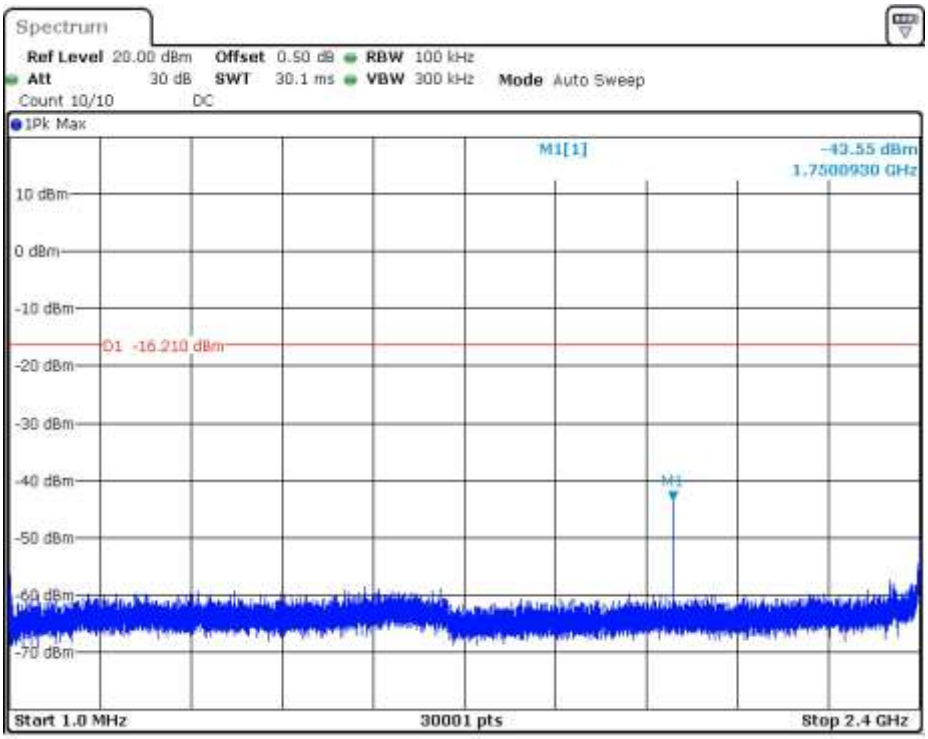

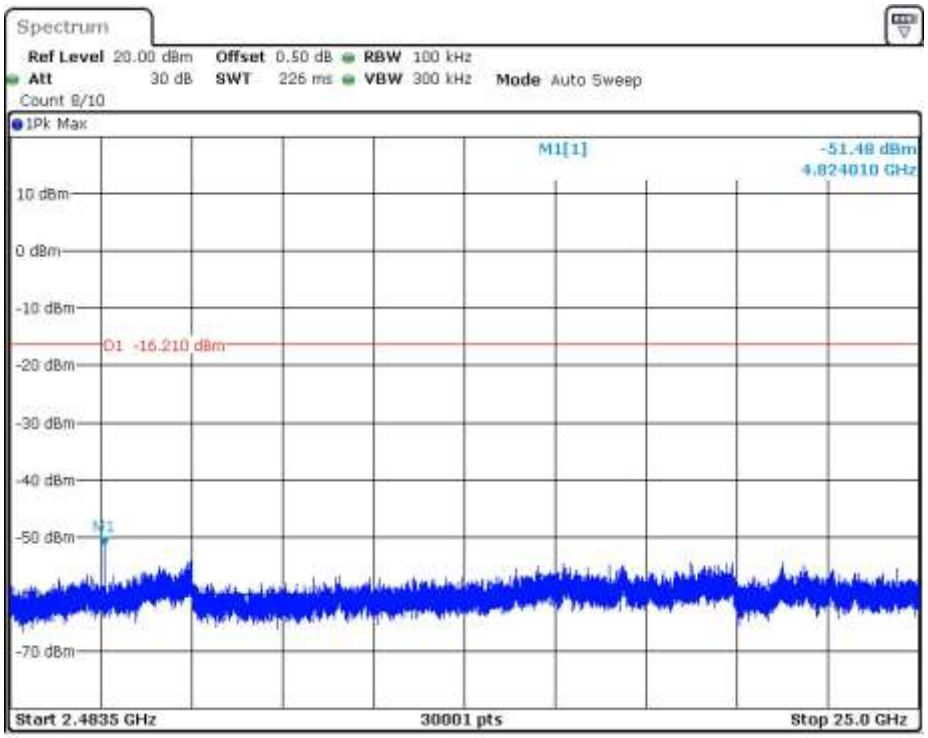


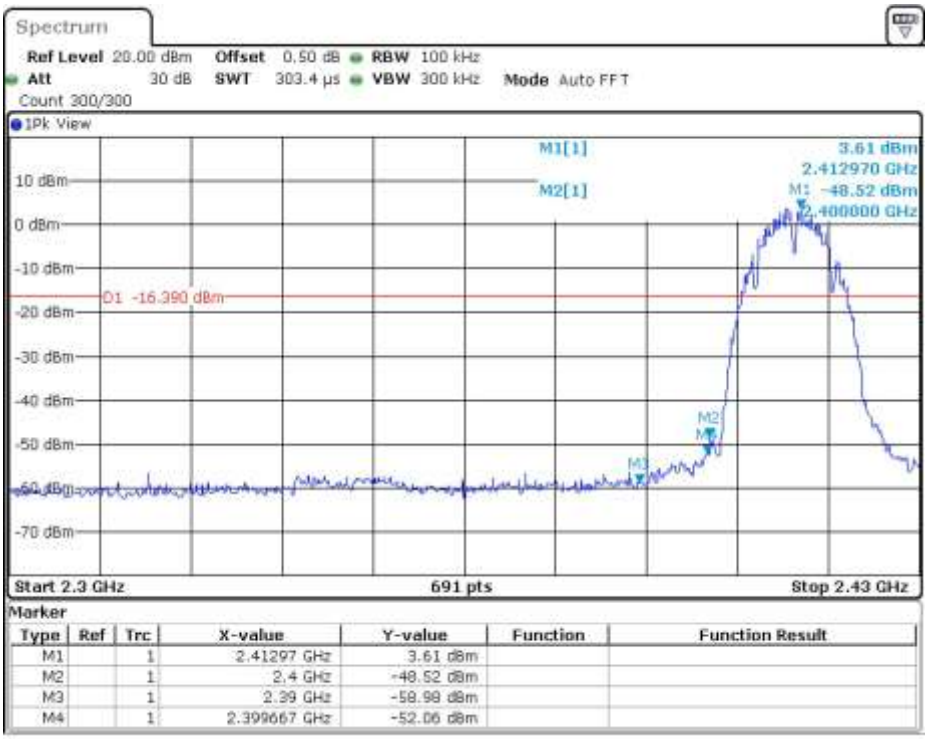


| Type | Ref | Trc | X-value | Y-value | Function | Function Result |
|---|---|---|---|---|---|---|
| M1 | | 1 | 2.41297 GHz | 3.61 dBm | | |
| M2 | | 1 | 2.4 GHz | -48.52 dBm | | |
| M3 | | 1 | 2.39 GHz | -58.98 dBm | | |
| M4 | | 1 | 2.399667 GHz | -52.06 dBm | | |

Channel 06 (2437MHz) Reference Level: 5.15dBm

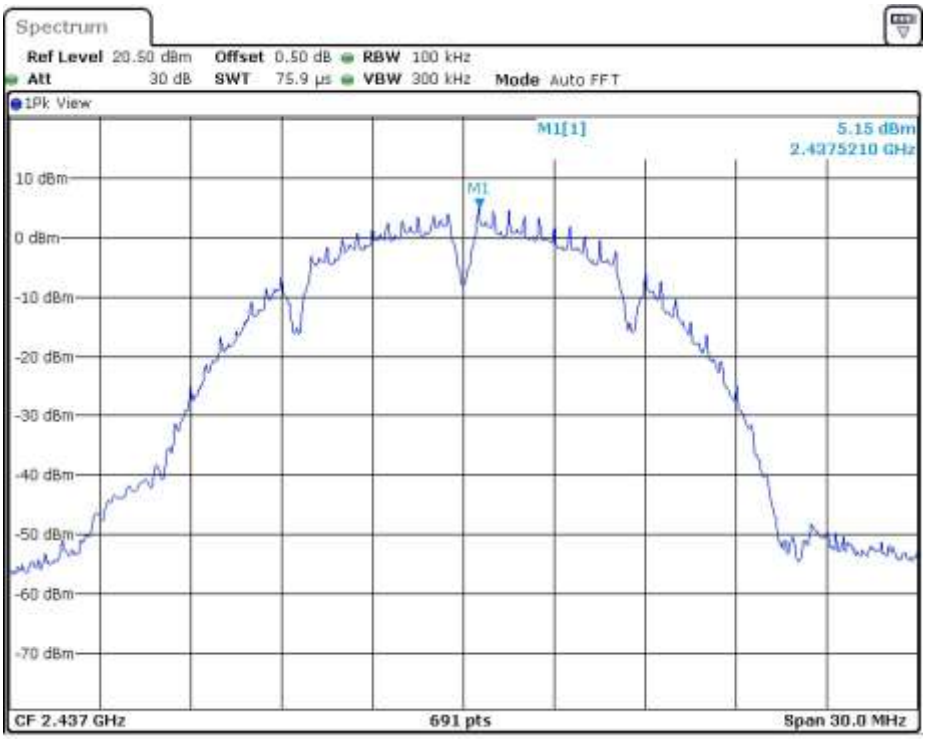


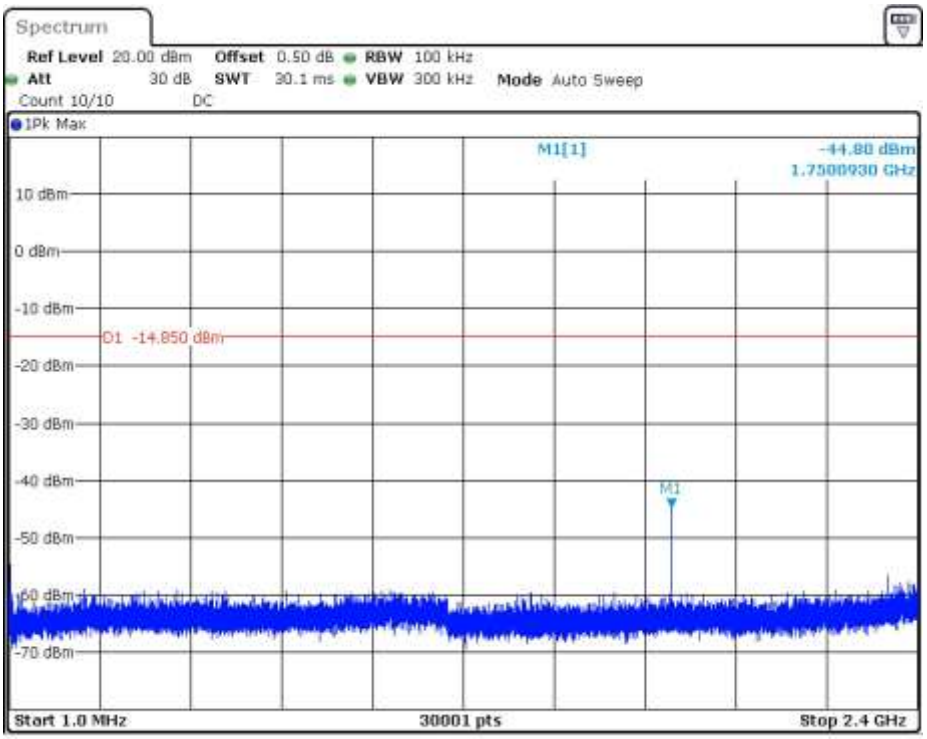

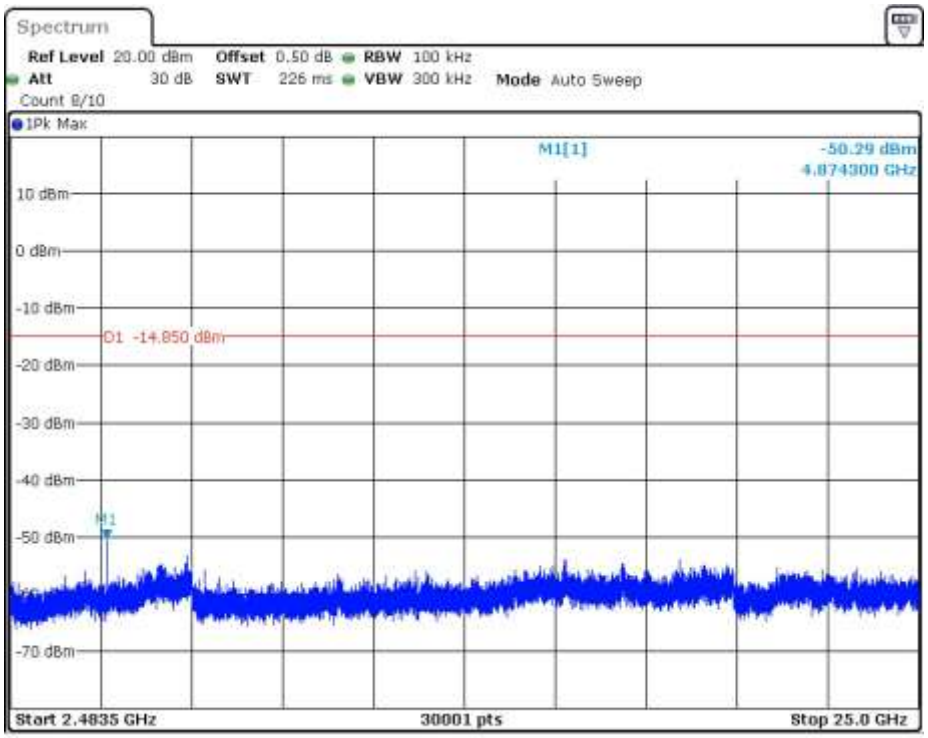
Spectrum
Ref Level 20.00 dBm Offset 0.50 dB RBW 100 kHz
Att 30 dB SWT 226 ms VBW 300 kHz Mode Auto Sweep
Count 8/10
1Pk Max
M1[1] -50.29 dBm
4.874300 GHz
10 dBm
0 dBm
-10 dBm
D1 -14.850 dBm
-20 dBm
-30 dBm
-40 dBm
M1
-50 dBm
-70 dBm
Start 2.4835 GHz
30001 pts
Stop 25.0 GHz

Channel 11 (2462MHz) Reference Level: 4.56dBm

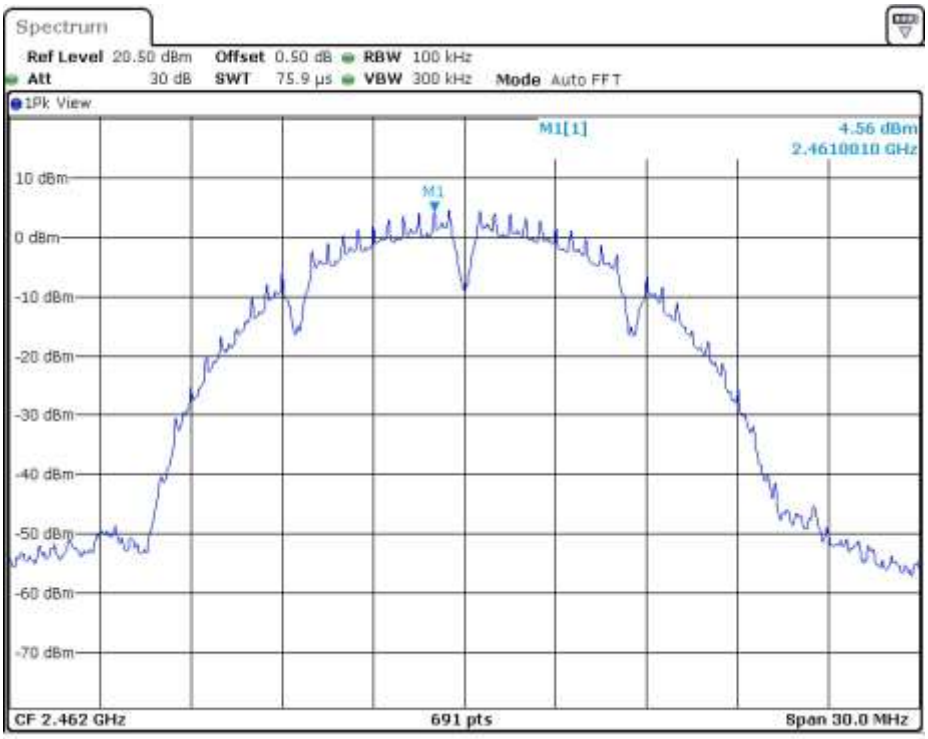


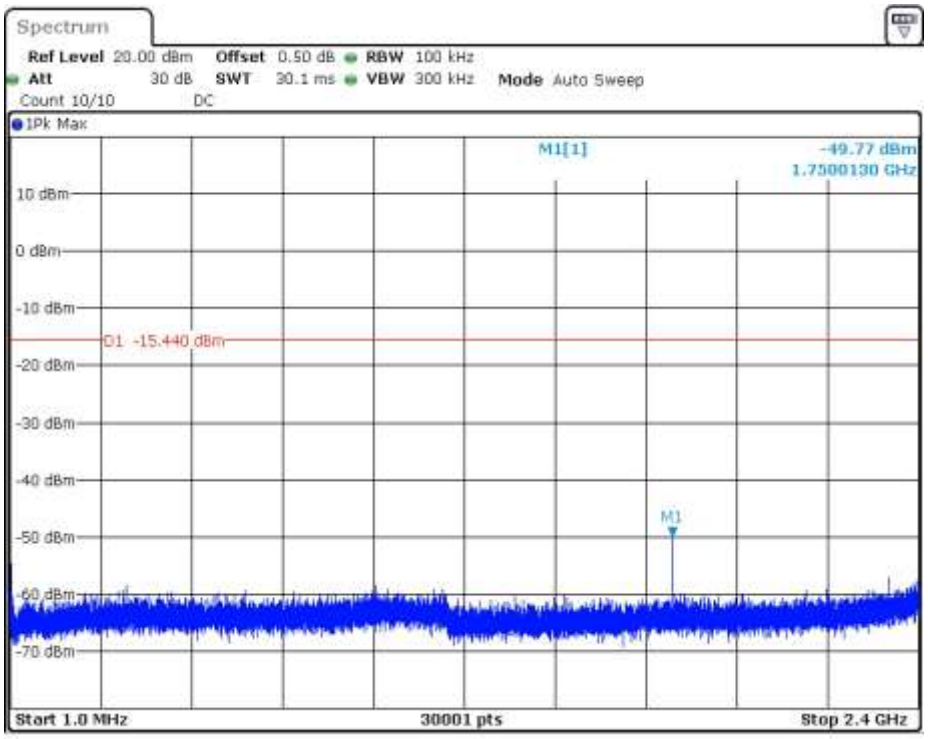

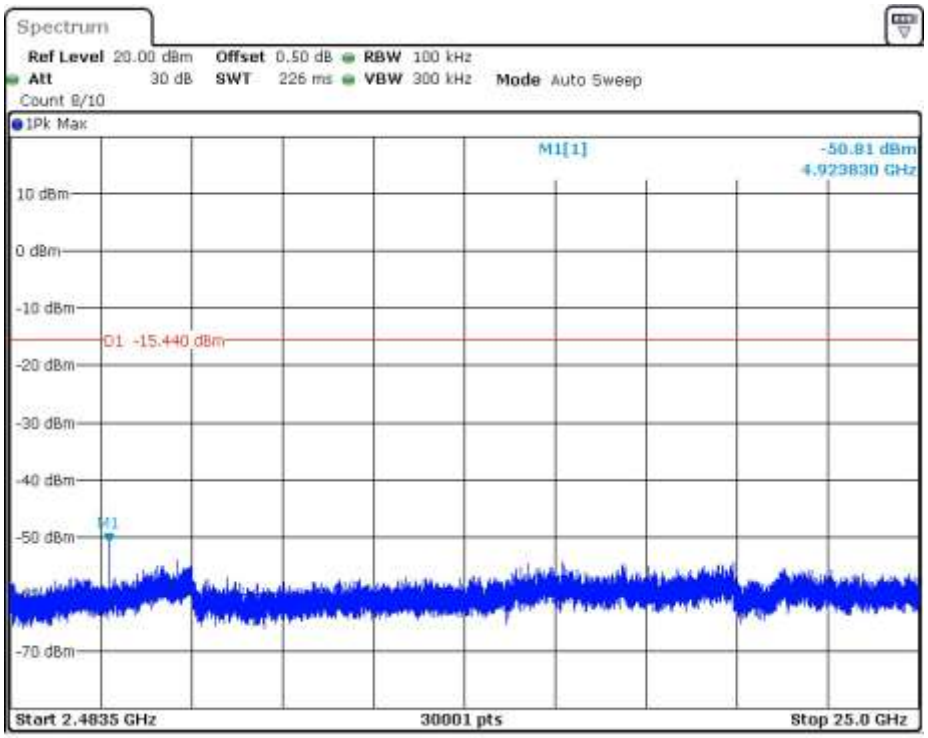


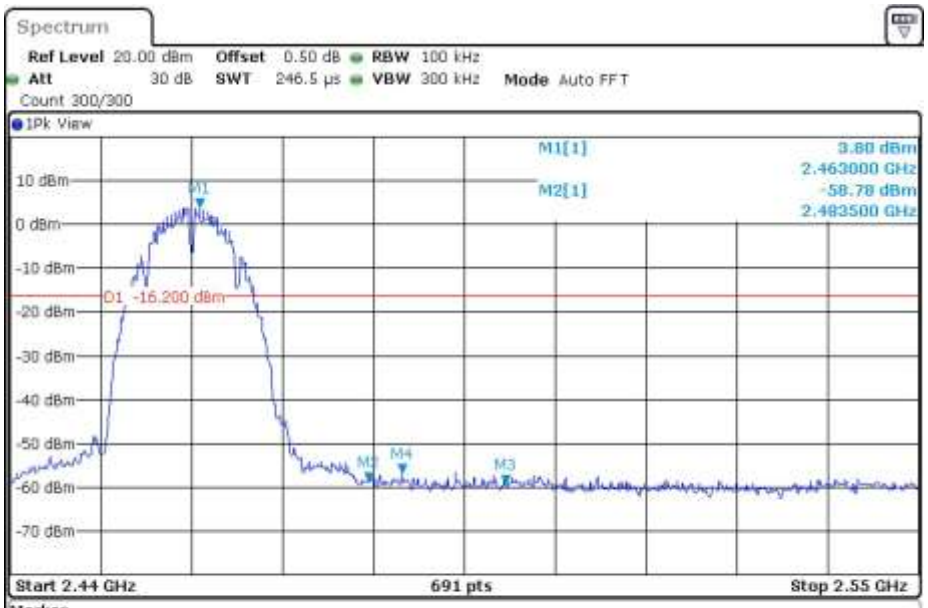


Marker

| Type | Ref | Trc | X-value | Y-value | Function | Function Result |
|---|---|---|---|---|---|---|
| M1 | | 1 | 2.463 GHz | 3.80 dBm | | |
| M2 | | 1 | 2.4835 GHz | -58.78 dBm | | |
| M3 | | 1 | 2.5 GHz | -58.63 dBm | | |
| M4 | | 1 | 2.487507 GHz | -56.65 dBm | | |

802.11g
Channel 01 (2412MHz) Reference Level: 1.44dBm

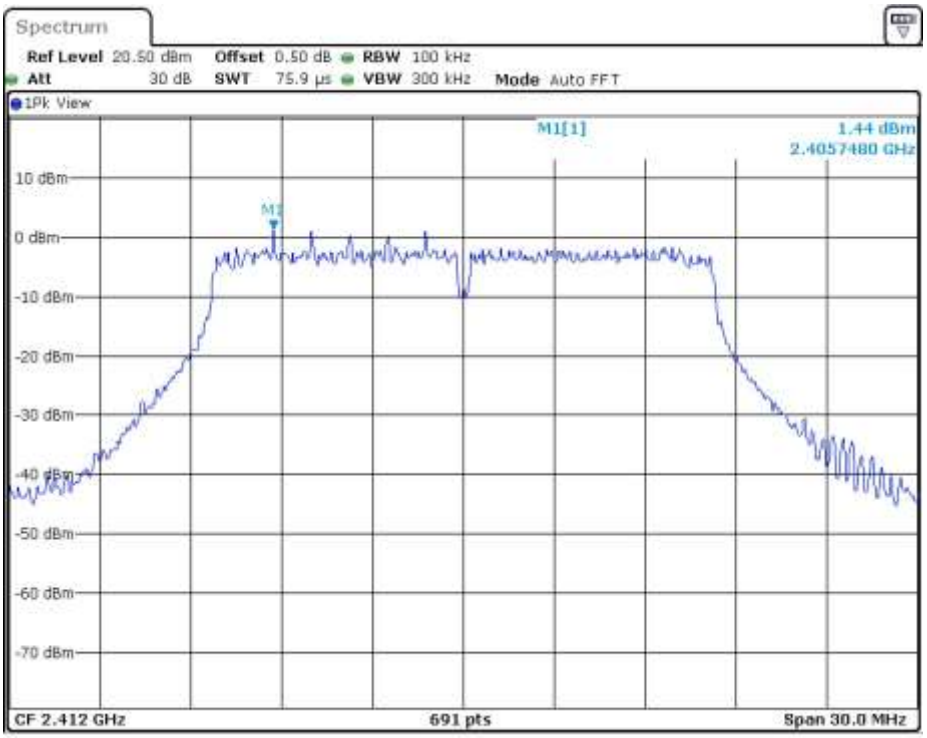


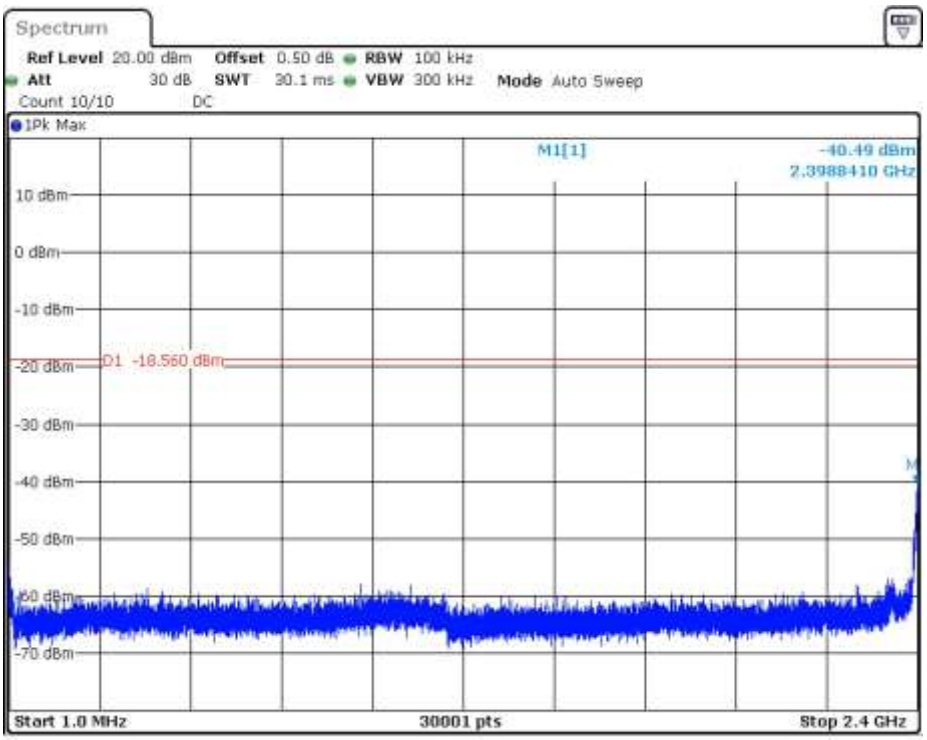

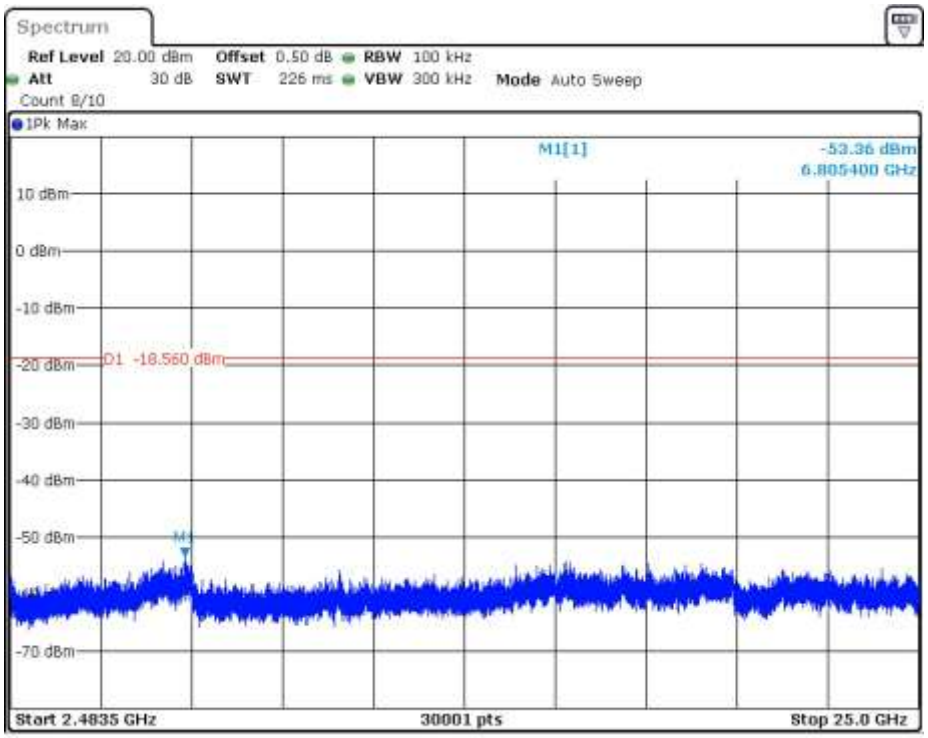


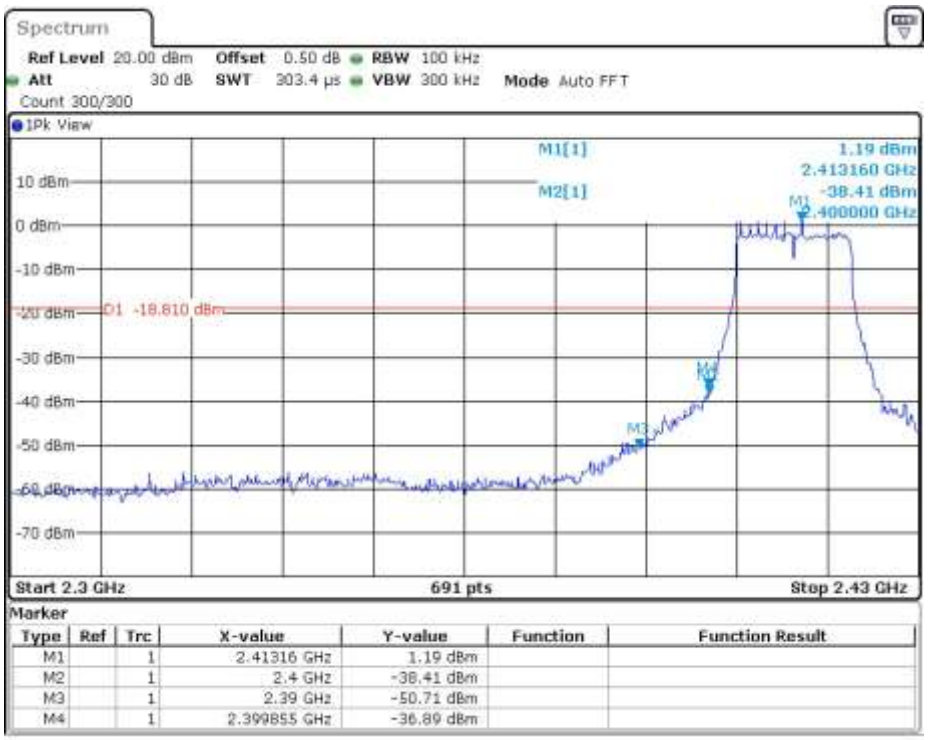


| Type | Ref | Trc | X-value | Y-value | Function | Function Result |
|---|---|---|---|---|---|---|
| M1 | | 1 | 2.41316 GHz | 1.19 dBm | | |
| M2 | | 1 | 2.4 GHz | -38.41 dBm | | |
| M3 | | 1 | 2.39 GHz | -50.71 dBm | | |
| M4 | | 1 | 2.399855 GHz | -36.89 dBm | | |

Channel 06 (2437MHz) Reference Level: 1.56dBm

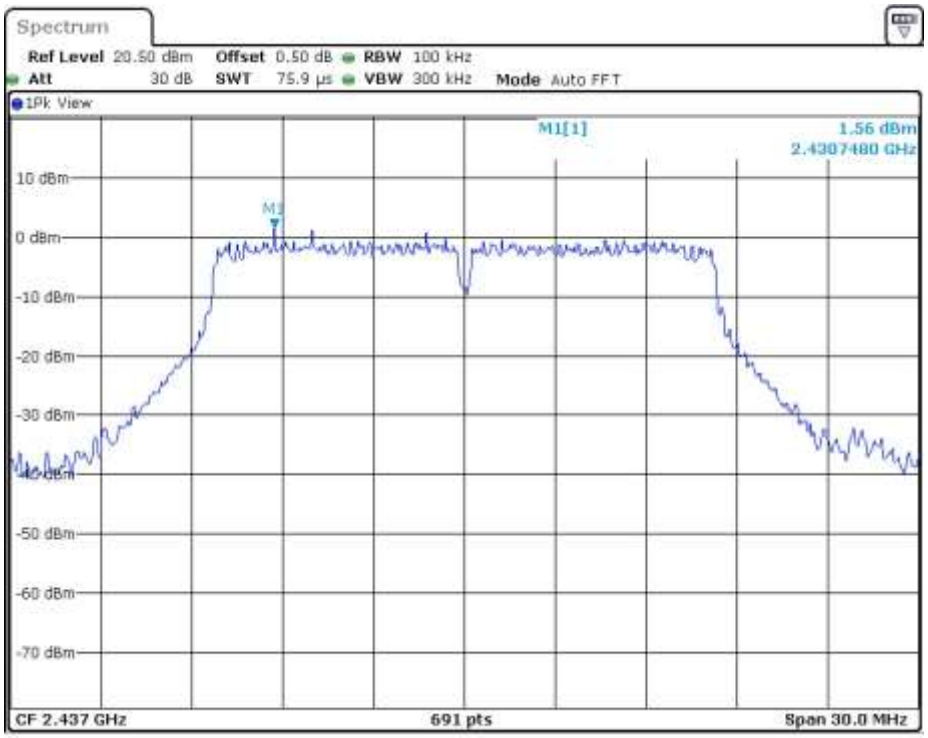


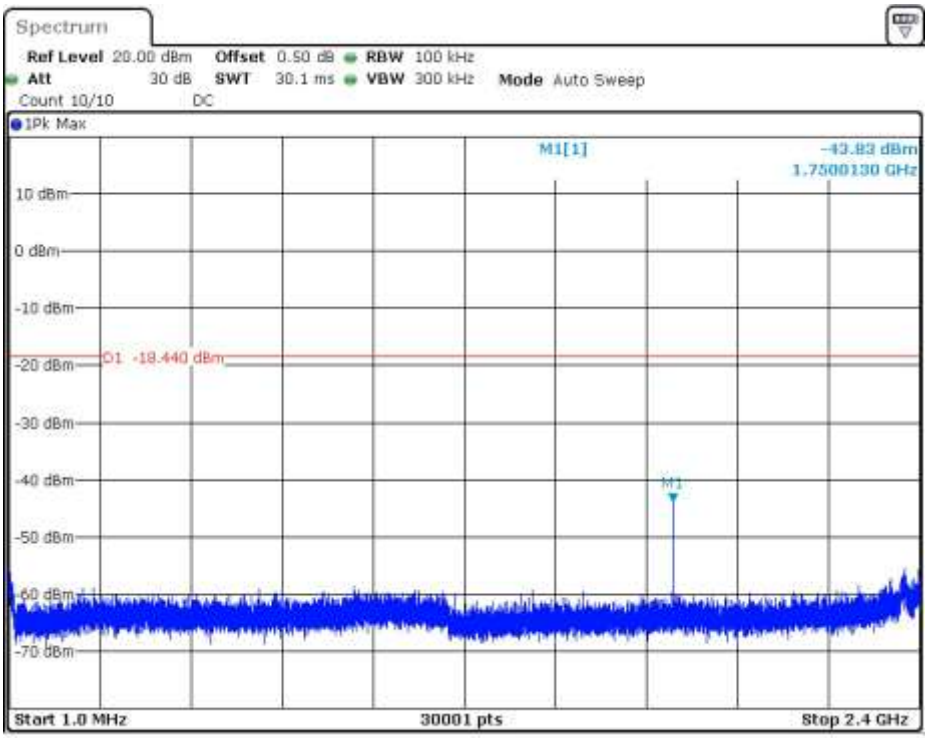

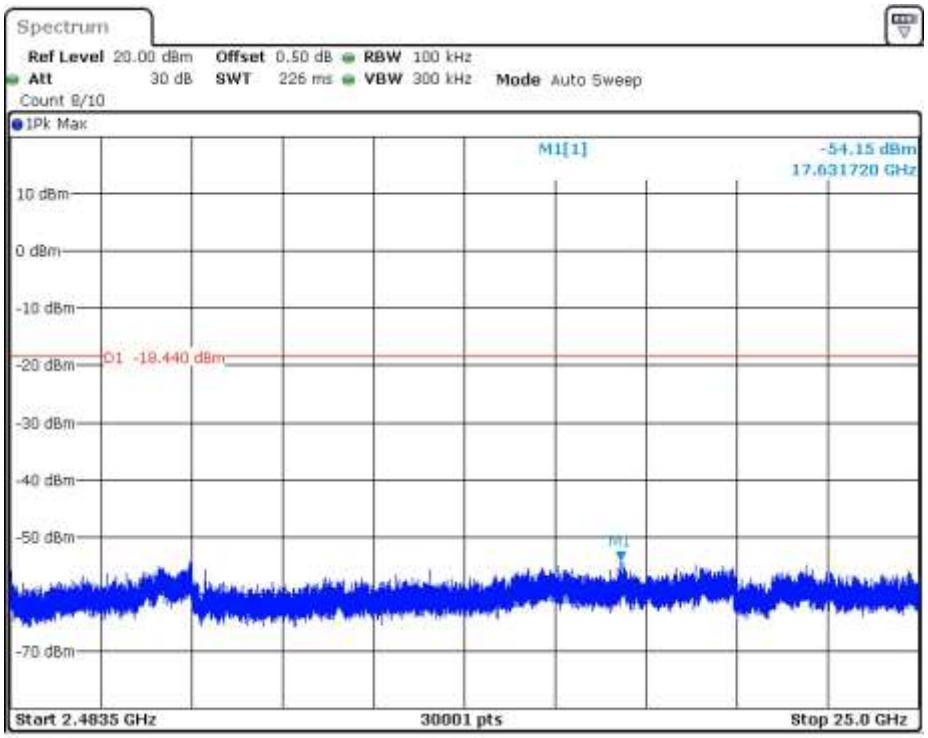
Spectrum
Ref Level 20.00 dBm Offset 0.50 dB RBW 100 kHz
Att 30 dB SWT 226 ms VBW 300 kHz Mode Auto Sweep
Count 8/10
1Pk Max
M1[1] -54.15 dBm
17.631720 GHz
10 dBm
0 dBm
-10 dBm
-20 dBm
D1 -18.440 dBm
-30 dBm
-40 dBm
-50 dBm
M1
-70 dBm
Start 2.4835 GHz
30001 pts
Stop 25.0 GHz

Channel 11 (2462MHz) Reference Level: 0.26dBm

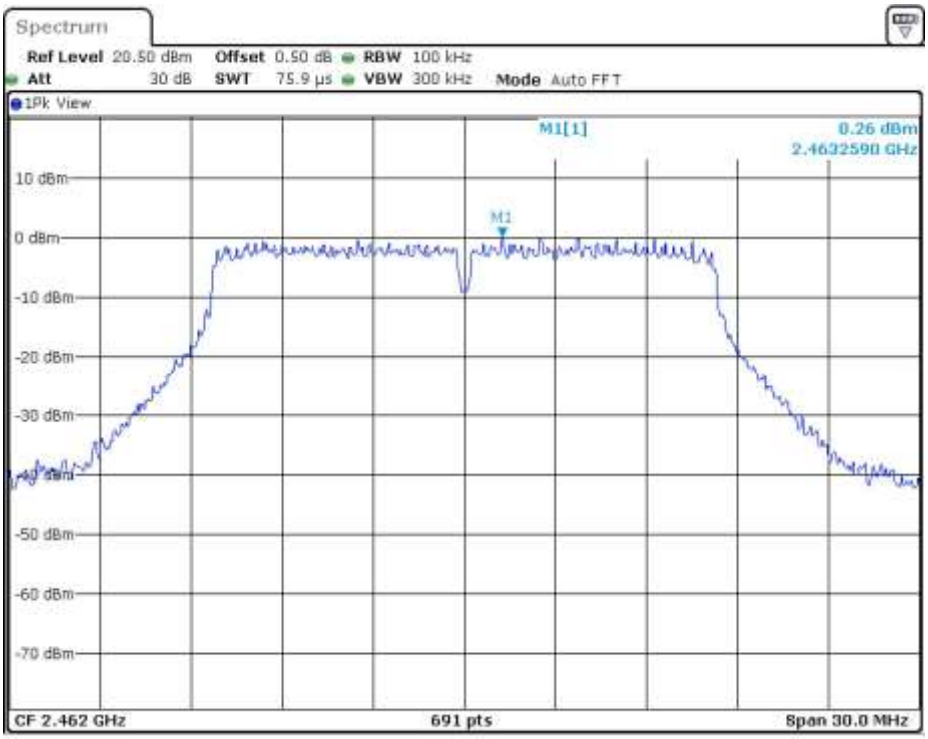


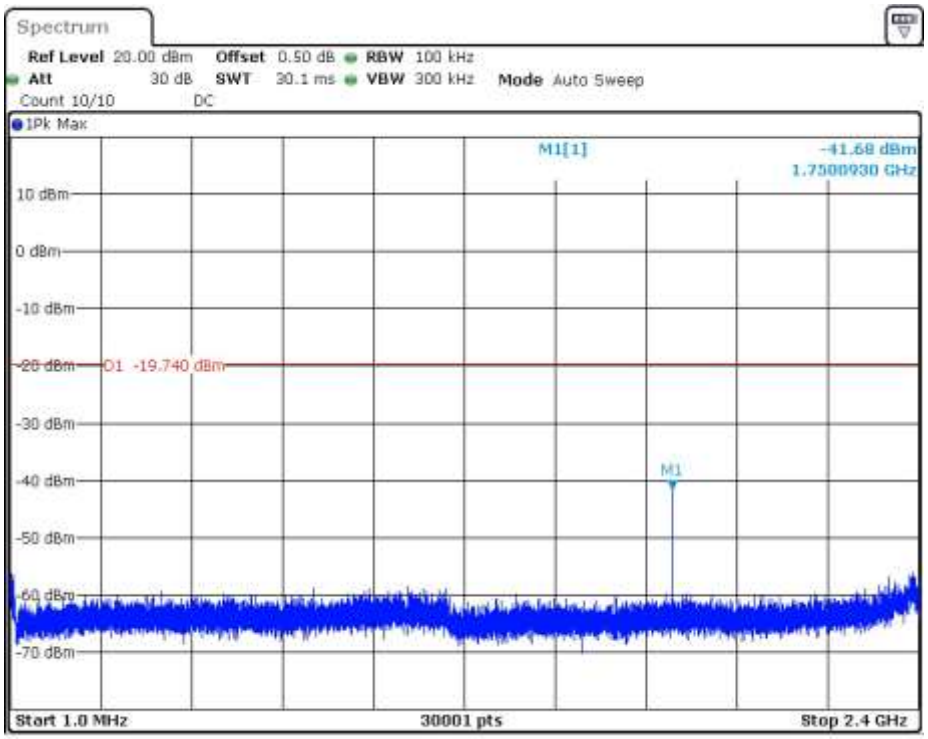

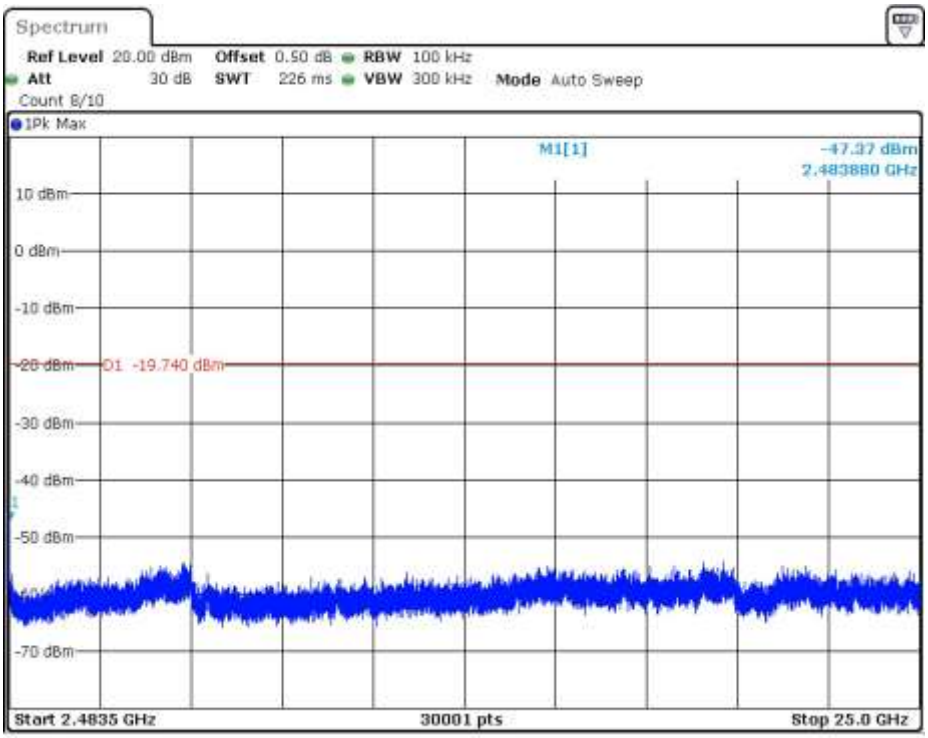


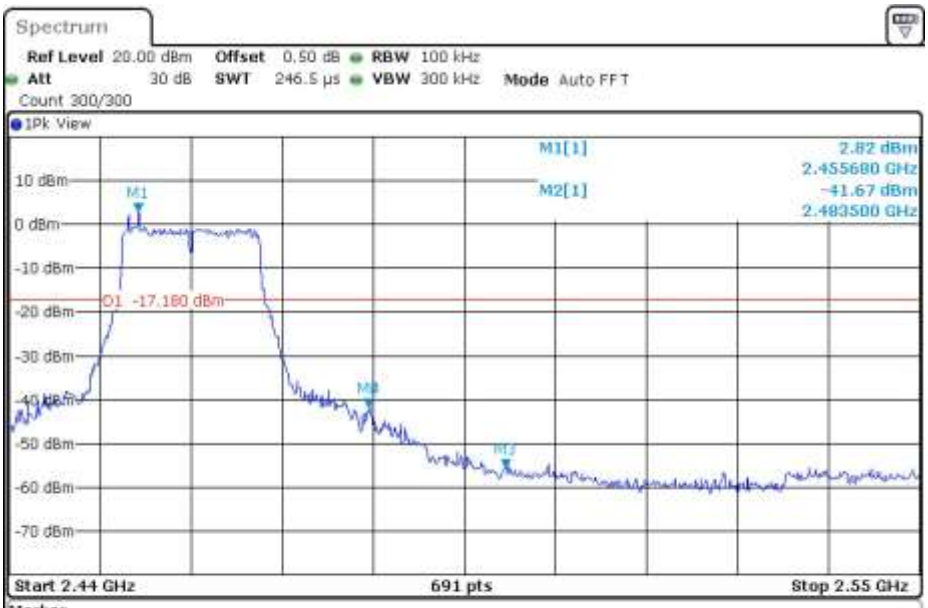


Marker

| Type | Ref | Trc | X-value | Y-value | Function | Function Result |
|---|---|---|---|---|---|---|
| M1 | | 1 | 2.45568 GHz | 2.82 dBm | | |
| M2 | | 1 | 2.4835 GHz | -41.67 dBm | | |
| M3 | | 1 | 2.5 GHz | -55.59 dBm | | |
| M4 | | 1 | 2.483522 GHz | -41.67 dBm | | |

802.11n-HT20
Channel 01 (2412MHz) Reference Level: 1.56dBm

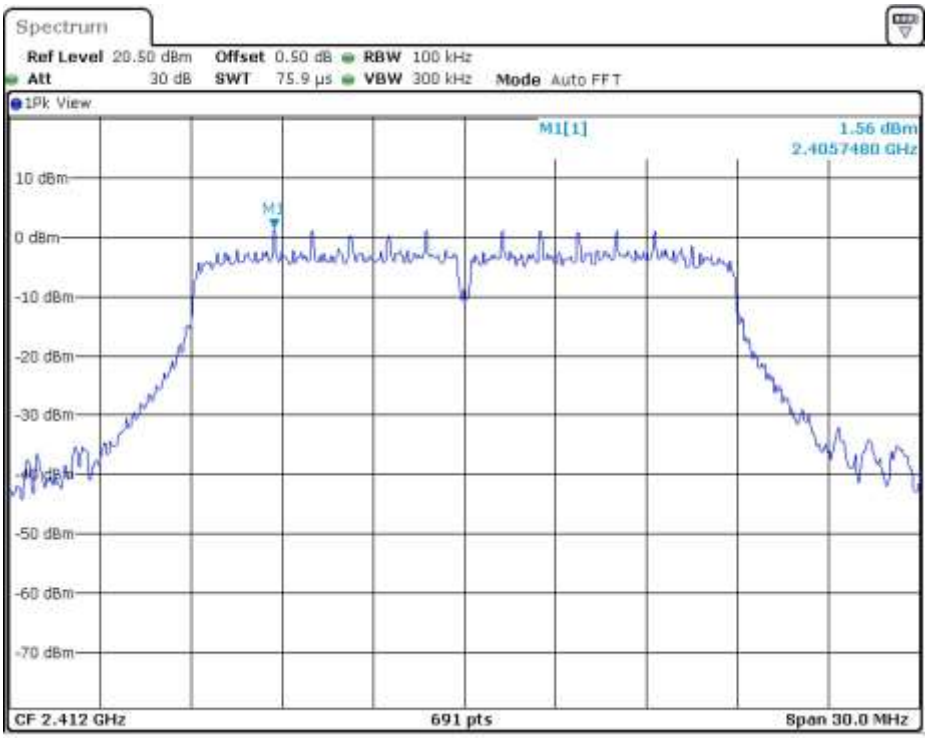


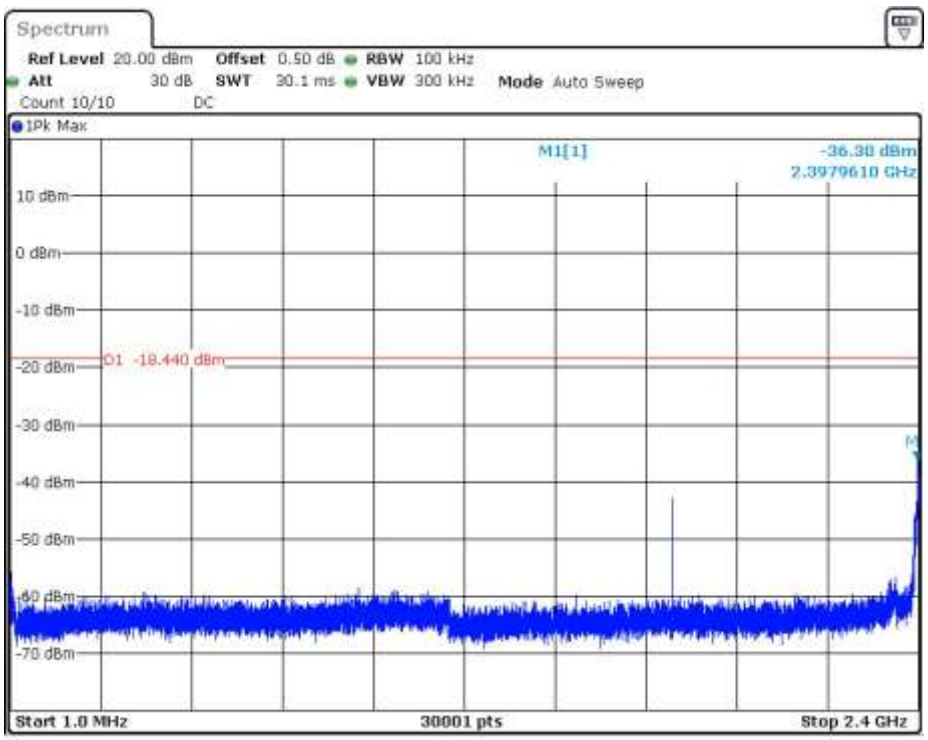

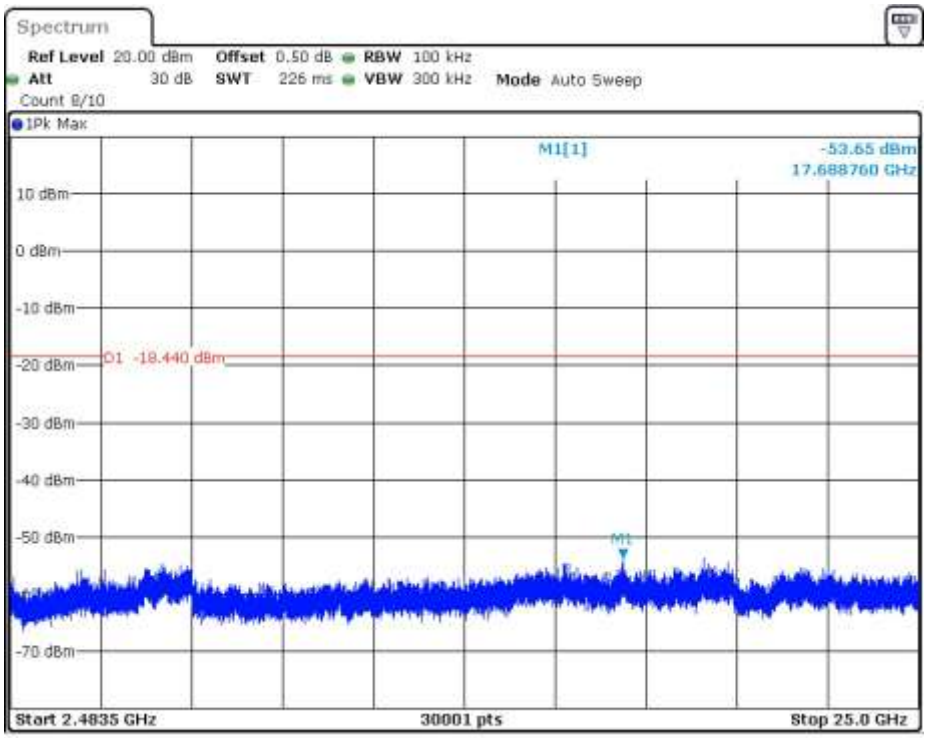


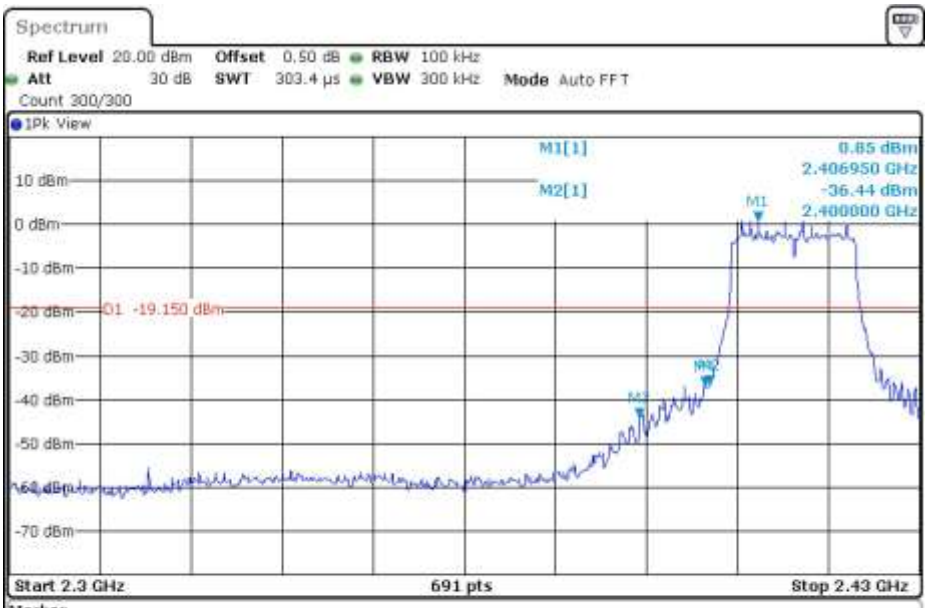


Marker

| Type | Ref | Trc | X-value | Y-value | Function | Function Result |
|---|---|---|---|---|---|---|
| M1 | | 1 | 2.40695 GHz | 0.85 dBm | | |
| M2 | | 1 | 2.4 GHz | -36.44 dBm | | |
| M3 | | 1 | 2.39 GHz | -44.12 dBm | | |
| M4 | | 1 | 2.39929 GHz | -36.72 dBm | | |

Channel 06 (2437MHz) Reference Level: 2.47dBm

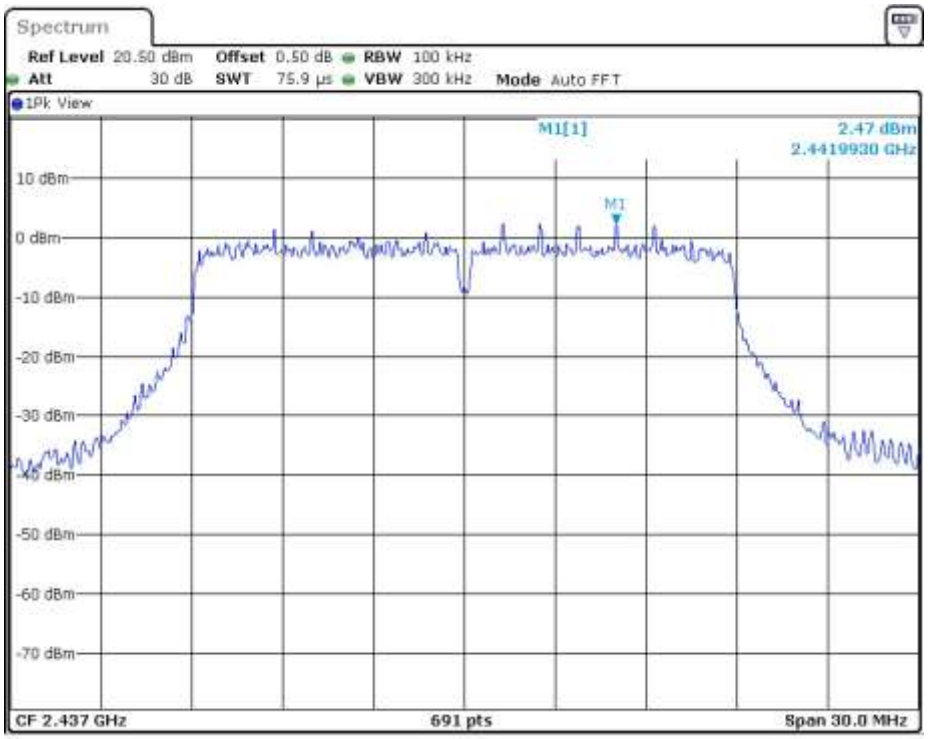


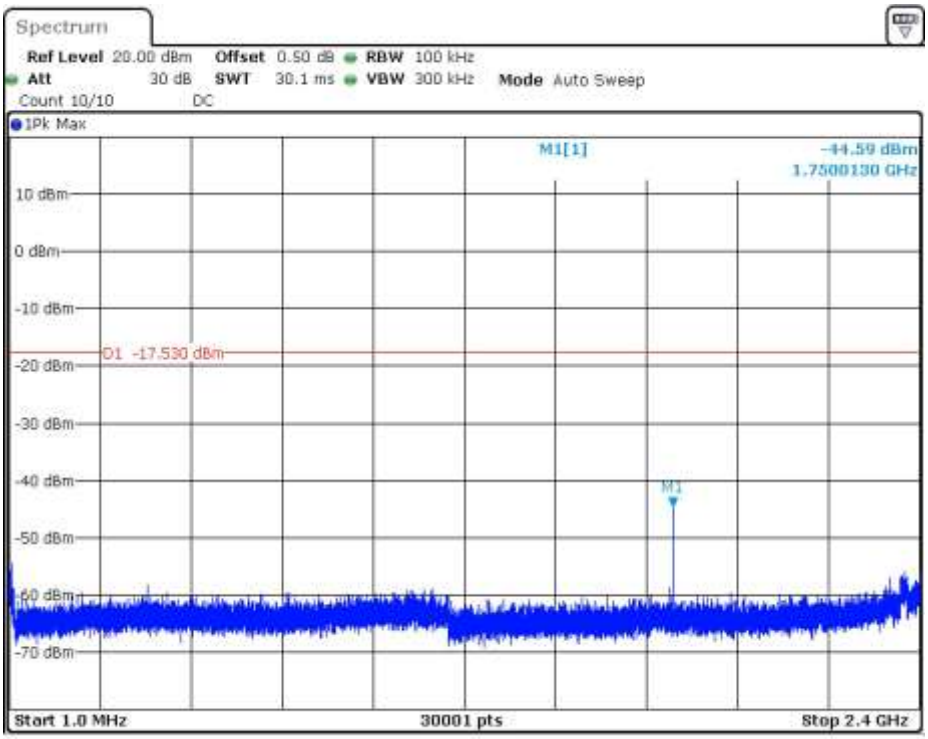

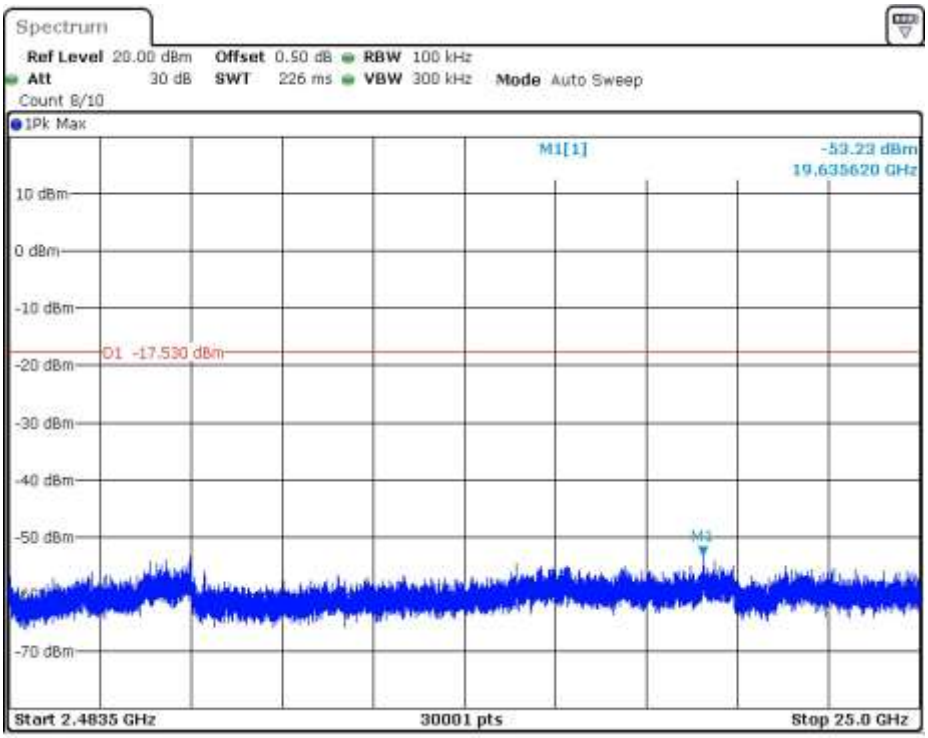
Spectrum
Ref Level 20.00 dBm Offset 0.50 dB RBW 100 kHz
Att 30 dB SWT 226 ms VBW 300 kHz Mode Auto Sweep
Count 8/10
1Pk Max
M1[1] -53.23 dBm
19.635620 GHz
10 dBm
0 dBm
-10 dBm
D1 -17.530 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
M1
-70 dBm
Start 2.4835 GHz
30001 pts
Stop 25.0 GHz

Channel 11 (2462MHz) Reference Level: 0.69dBm

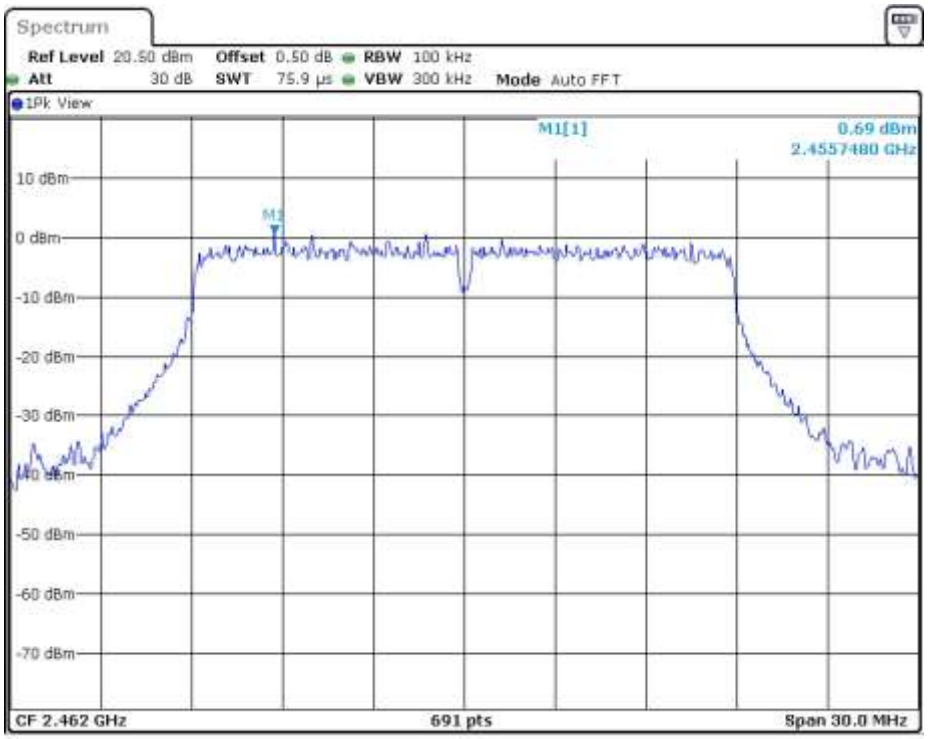


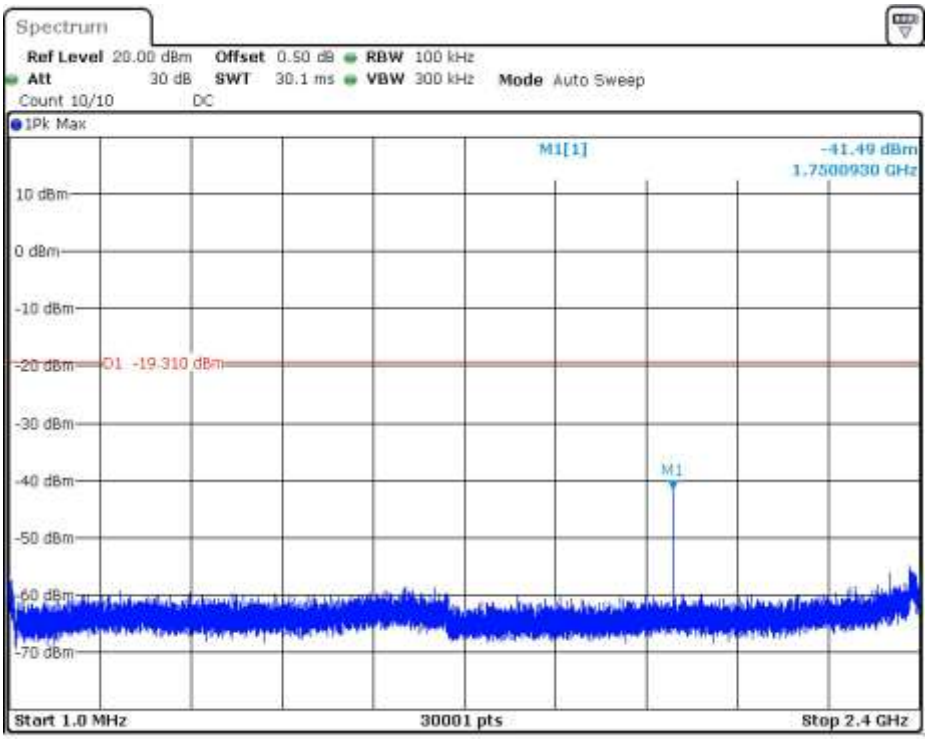

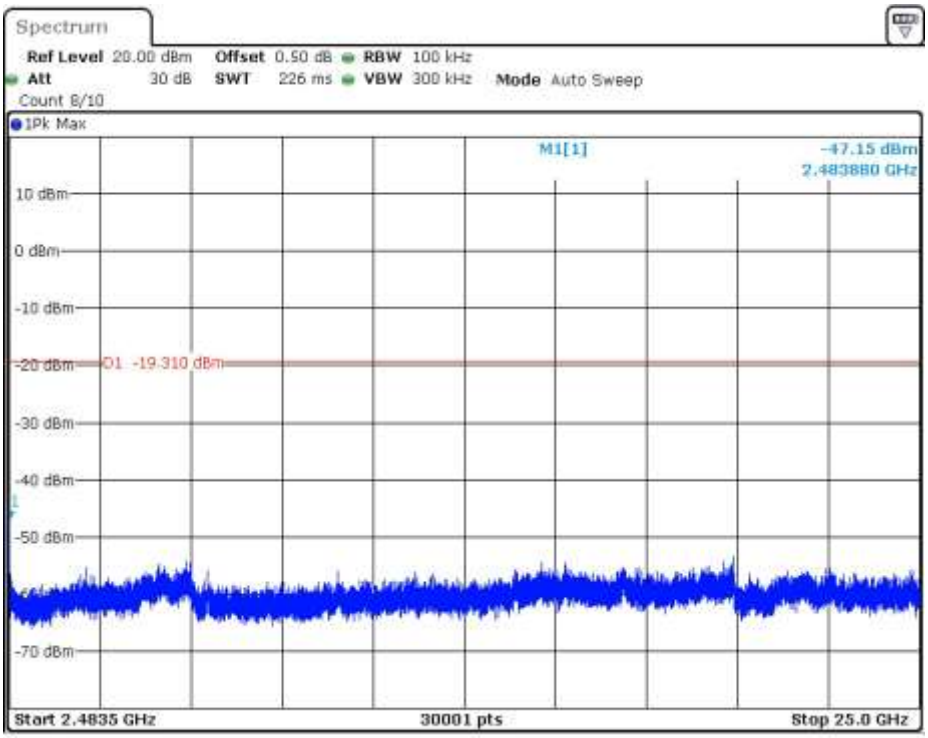
Spectrum
Ref Level 20.00 dBm Offset 0.50 dB RBW 100 kHz
Att 30 dB SWT 226 ms VBW 300 kHz Mode Auto Sweep
Count 8/10
1Pk Max
M1[1] -47.15 dBm
2.483880 GHz
D1 -19.310 dBm
Start 2.4835 GHz 30001 pts Stop 25.0 GHz

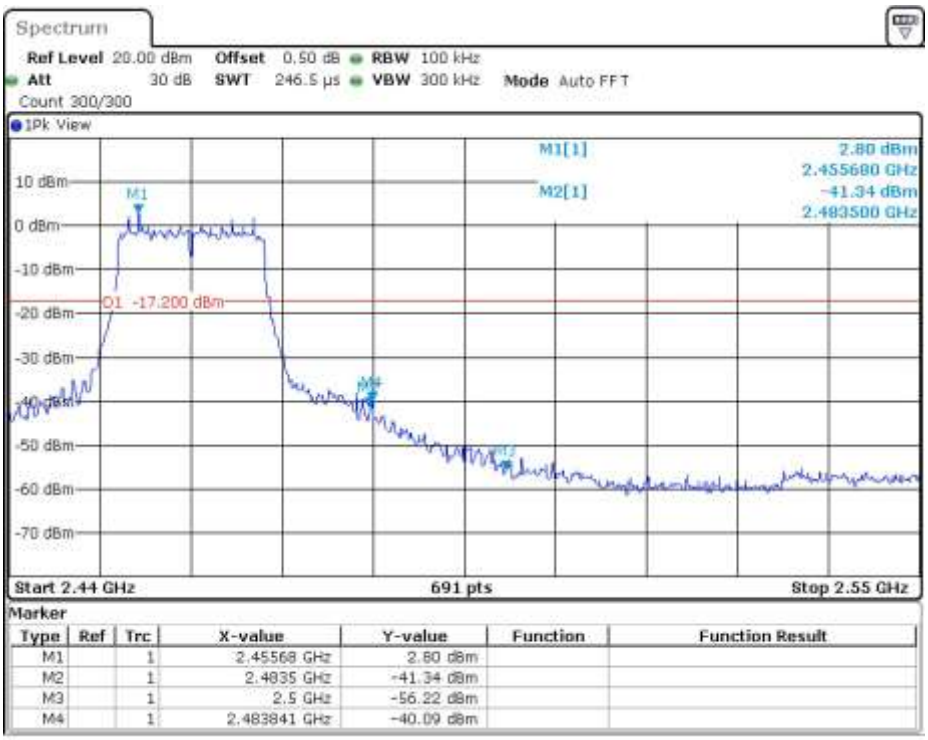
Spectrum
Ref Level 20.00 dBm Offset 0.50 dB RBW 100 kHz
Att 30 dB SWT 246.5 µs VBW 300 kHz Mode Auto FFT
Count 300/300
1Pk View
M1[1] 2.80 dBm
2.455680 GHz
M2[1] -41.34 dBm
2.483500 GHz
D1 -17.200 dBm
Start 2.44 GHz 691 pts Stop 2.55 GHz
Marker
Type Ref Trc X-value Y-value Function Function Result
M1 1 2.45568 GHz 2.80 dBm
M2 1 2.4835 GHz -41.34 dBm
M3 1 2.5 GHz -56.22 dBm
M4 1 2.483841 GHz -40.09 dBm

802.11n-HT40
Channel 01 (2422MHz) Reference Level: -0.89dBm

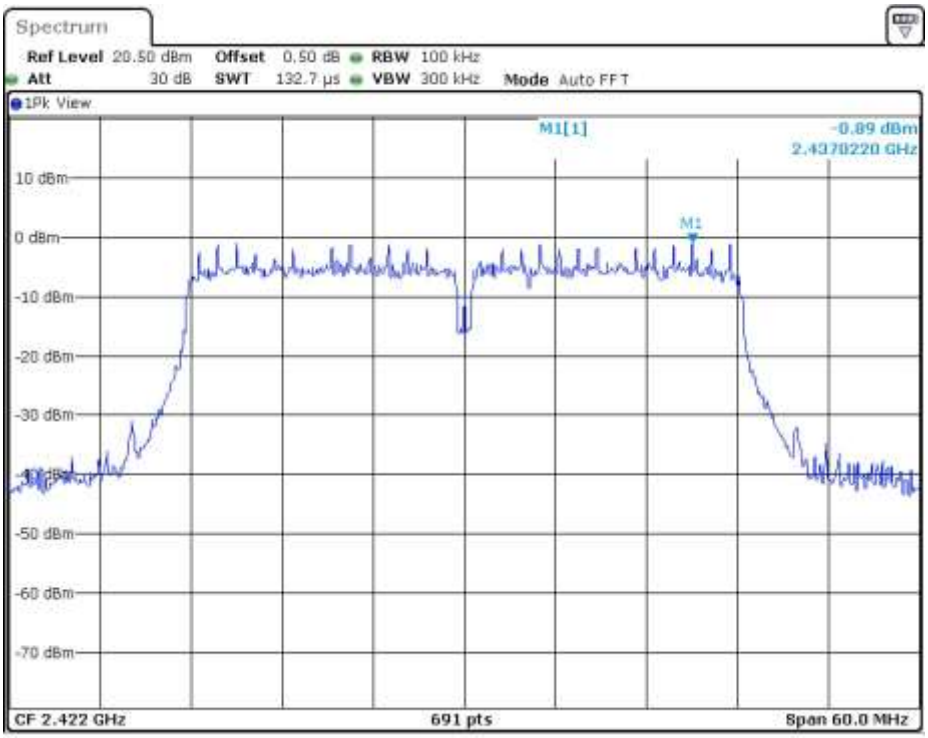


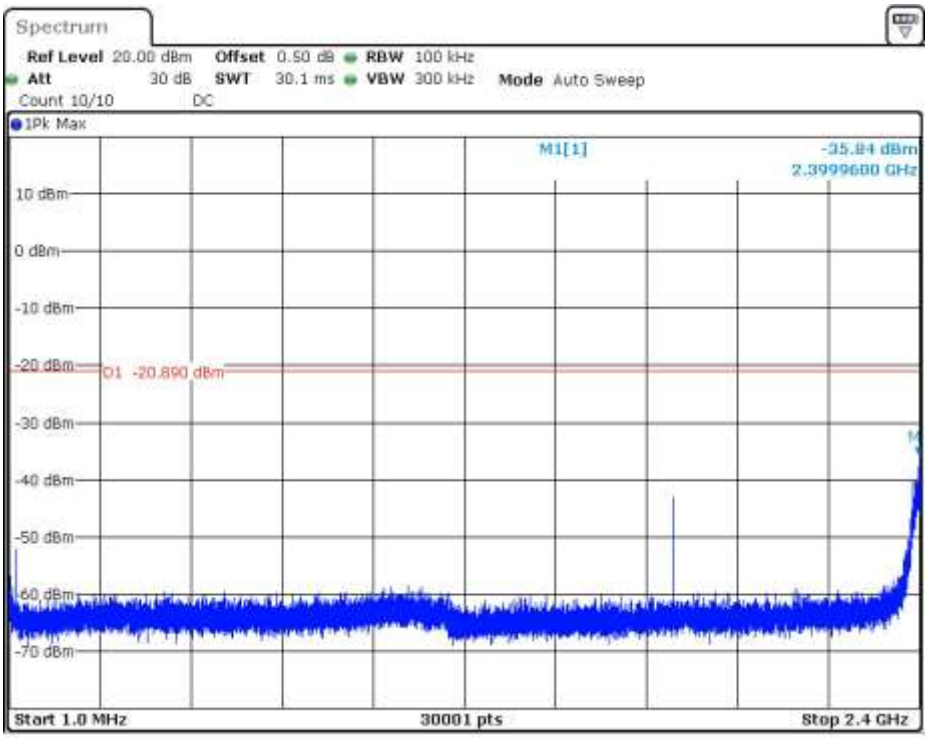

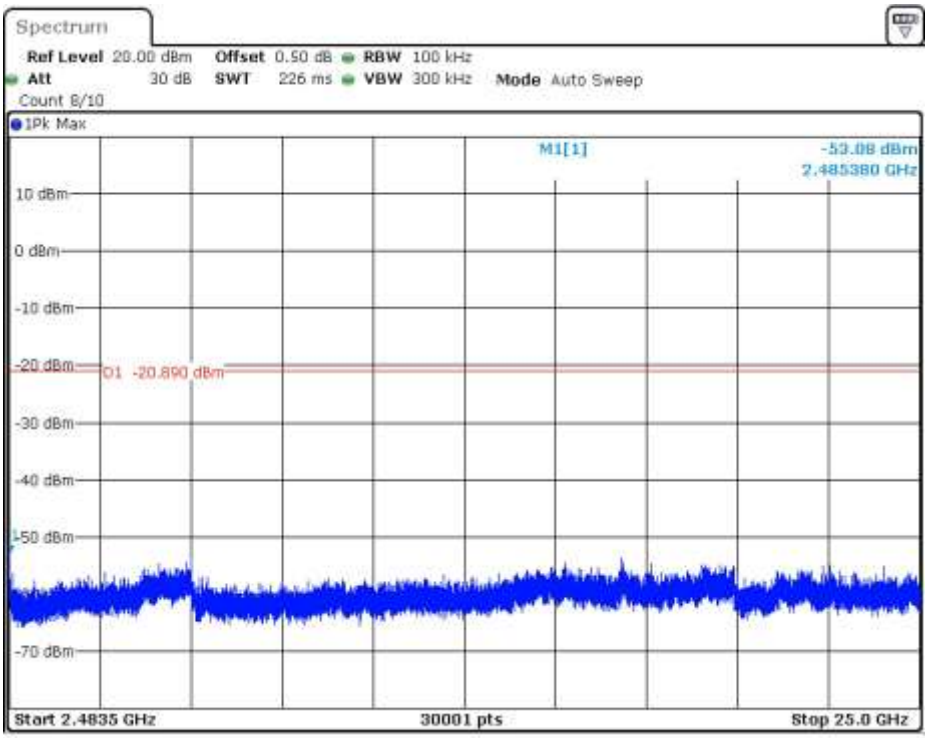


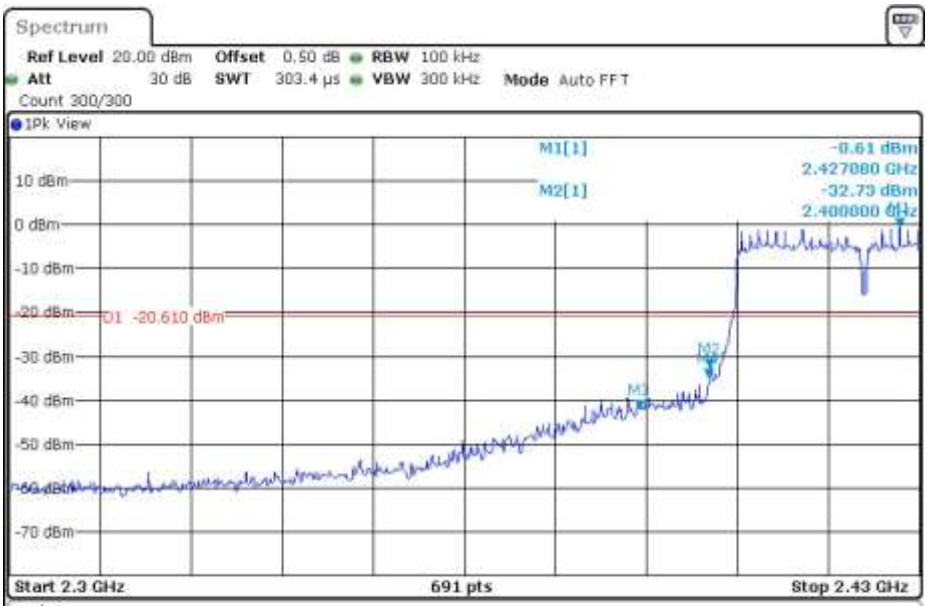


Marker

| Type | Ref | Trc | X-value | Y-value | Function | Function Result |
|---|---|---|---|---|---|---|
| M1 | | 1 | 2.42708 GHz | -0.61 dBm | | |
| M2 | | 1 | 2.4 GHz | -32.73 dBm | | |
| M3 | | 1 | 2.39 GHz | -42.07 dBm | | |
| M4 | | 1 | 2.399855 GHz | -34.92 dBm | | |

Channel 06 (2437MHz) Reference Level: 0.37dBm

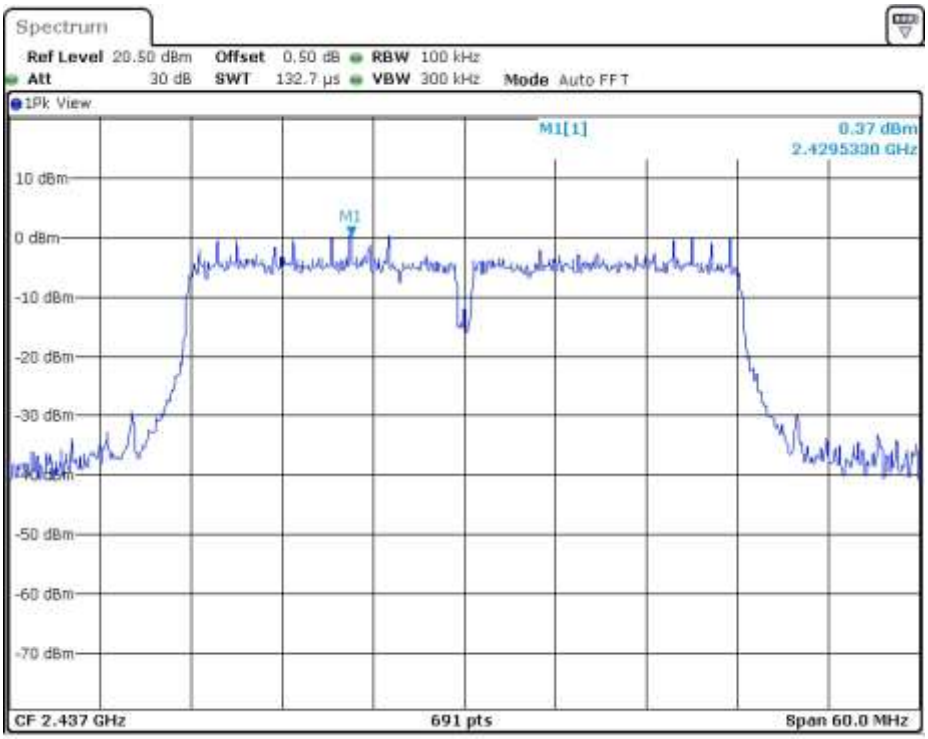


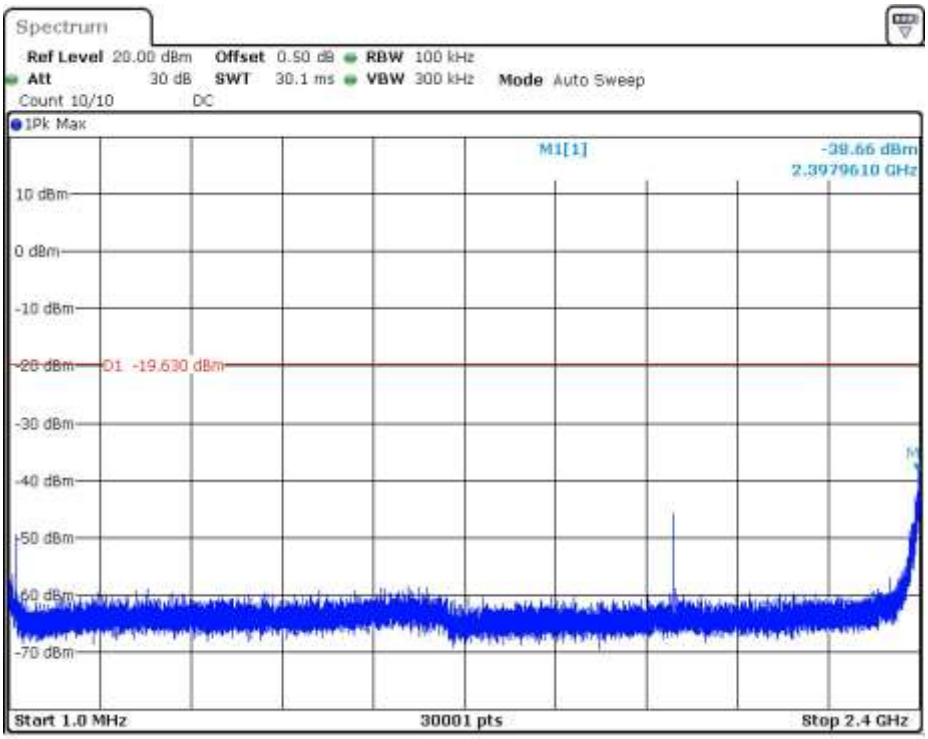

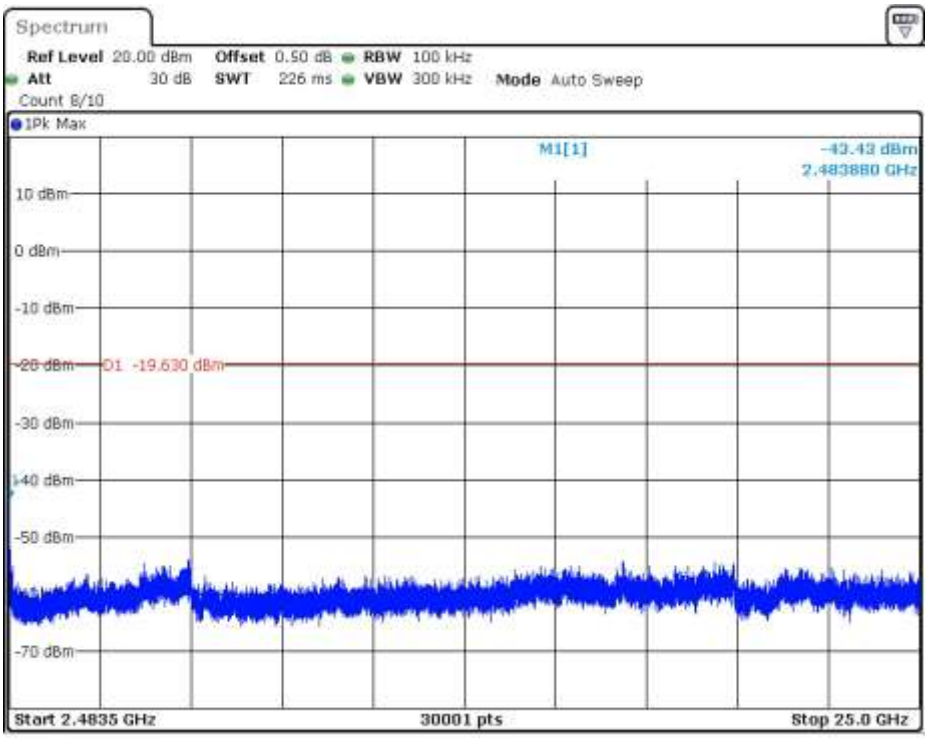
Spectrum
Ref Level 20.00 dBm Offset 0.50 dB RBW 100 kHz
Att 30 dB SWT 226 ms VBW 300 kHz Mode Auto Sweep
Count 8/10
1Pk Max
M1[1] -43.43 dBm
2.483880 GHz
10 dBm
0 dBm
-10 dBm
-20 dBm
D1 -19.630 dBm
-30 dBm
-40 dBm
-50 dBm
-70 dBm
Start 2.4835 GHz
30001 pts
Stop 25.0 GHz

Channel 11 (2452MHz) Reference Level: -2.43dBm

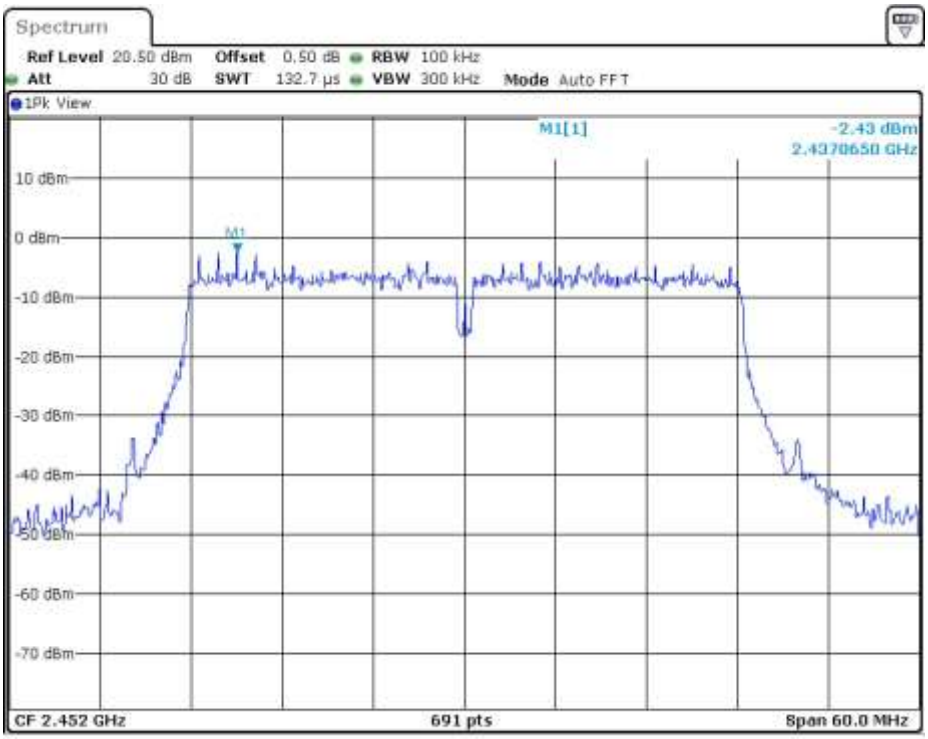


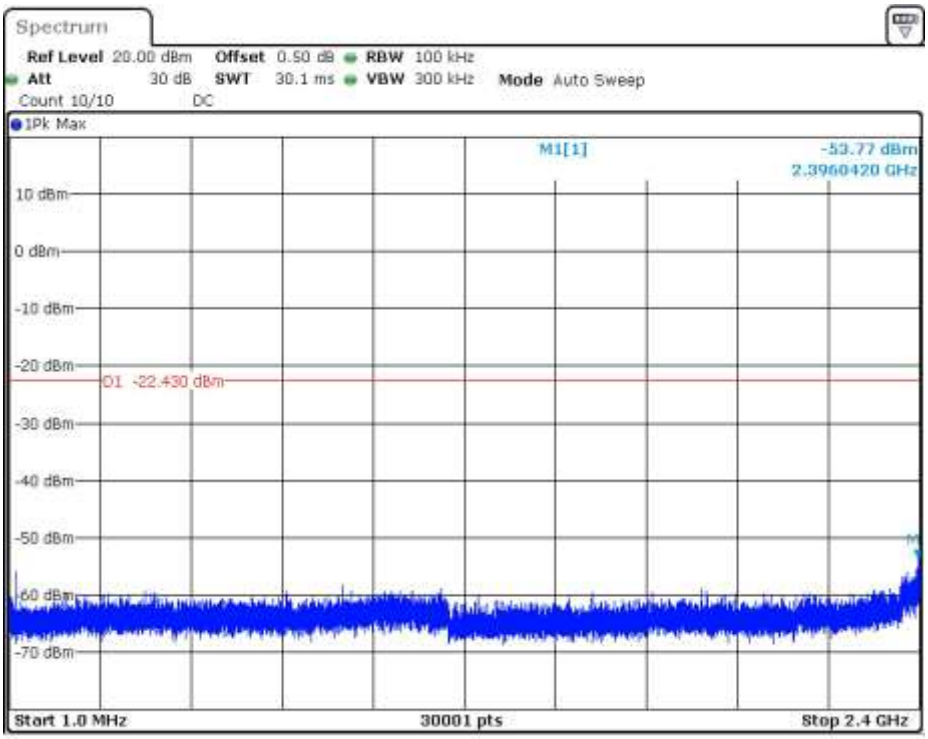

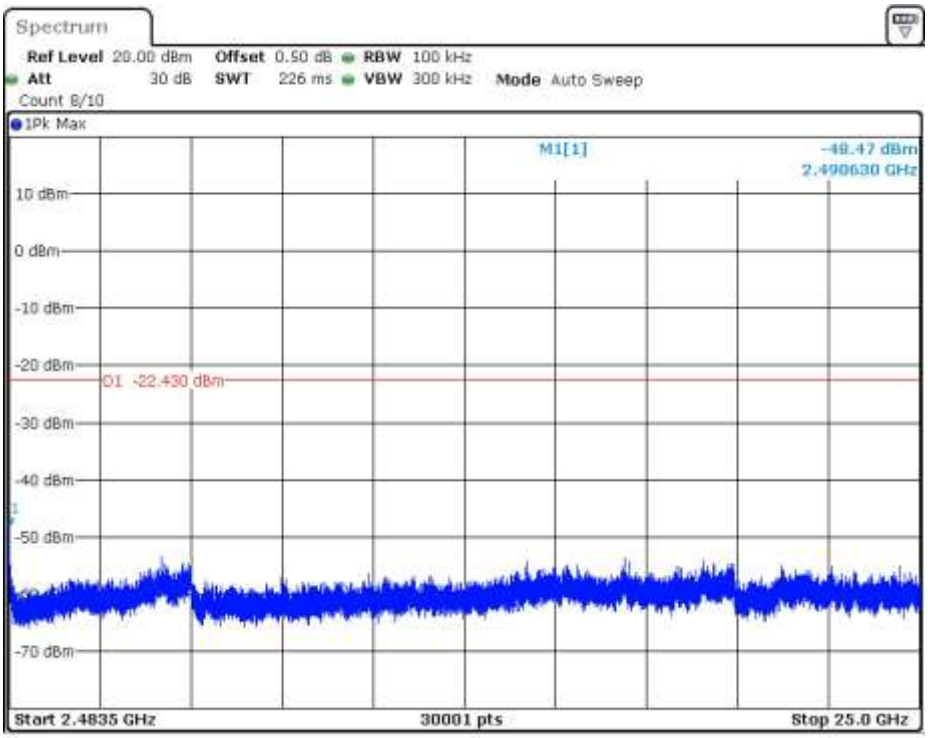


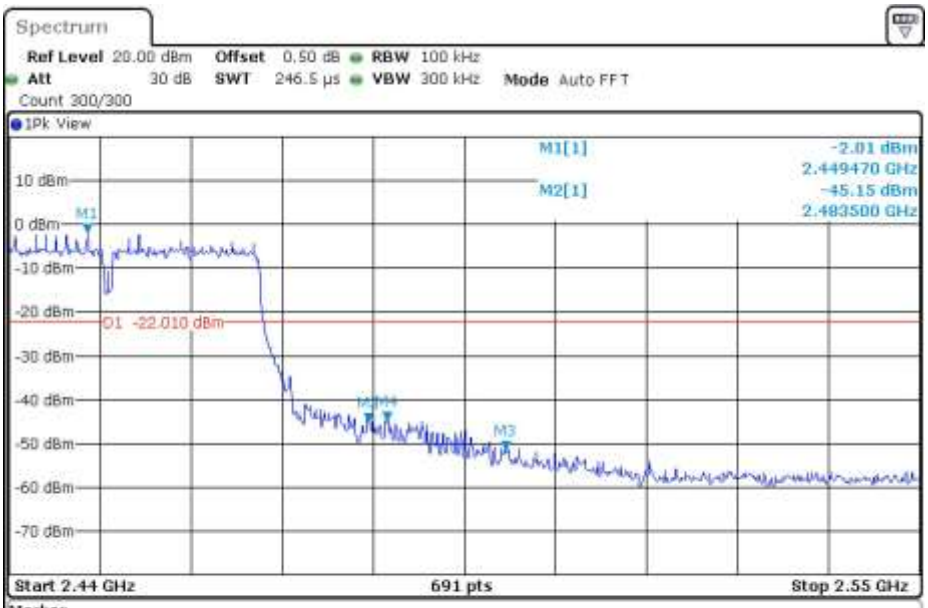


Marker

| Type | Ref | Trc | X-value | Y-value | Function | Function Result |
|---|---|---|---|---|---|---|
| M1 | | 1 | 2.44947 GHz | -2.01 dBm | | |
| M2 | | 1 | 2.4835 GHz | -45.15 dBm | | |
| M3 | | 1 | 2.5 GHz | -51.03 dBm | | |
| M4 | | 1 | 2.485754 GHz | -44.75 dBm | | |

4.5 Out of Band Radiated Emissions (for emissions in 4.4 above that are less than 20dB below carrier), FCC Rule 15.247(d):

For out of band emissions that are close to or that exceed the 20dB attenuation requirement described in the specification, radiated measurements were performed at a 3m separation distance to determine whether these emissions complied with the general radiated emission requirement.

[×] Not required, since all emissions are more than 20dB below fundamental
[ ] See attached data sheet

## 4.6 Transmitter Radiated Emissions in Restricted Bands, FCC Rule 15.35(b) (c):

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included. All measurements were performed with peak detection unless otherwise specified.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

## 4.7 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

FS = RA + AF + CF - AG + PD

Where FS = Field Strength in dBμV/m
RA = Receiver Amplitude (including preamplifier) in dBμV
CF = Cable Attenuation Factor in dB
AF = Antenna Factor in dB/m
AG = Amplifier Gain in dB
PD = Pulse Desensitization in dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

FS = RA + AF + CF - AG + PD

<u>Example</u>
Assume a receiver reading of 62.0 dBμV is obtained. The antenna factor of 7.4 dB/m and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB. The net field strength for comparison to the appropriate emission limit is 42 dBμV/m. This value in dBμV/m was converted to its corresponding level in μV/m.

RA = 62.0 dBμV
AF = 7.4 dB/m
CF = 1.6 dB
AG = 29.0 dB
PD = 0 dB
FS = 62 + 7.4 + 1.6 - 29 + 0 = 42 dBμV/m

Level in mV/m = Common Antilogarithm [(42 dBμV/m)/20] = 125.9 μV/m

## 4.8 Radiated Spurious Emission

Worst Case Radiated Spurious Emission
at 2390.0MHz
is passed by 3.0dB margin.

For the electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

Applicant: SUPER ROD LIMITED
Date of Test: 31 August 2022 Model: SRCAMV6.5
Worst Case Operating Mode: Transmitting (802.11b-Channel 01)

ANT Polarity: Horizontal

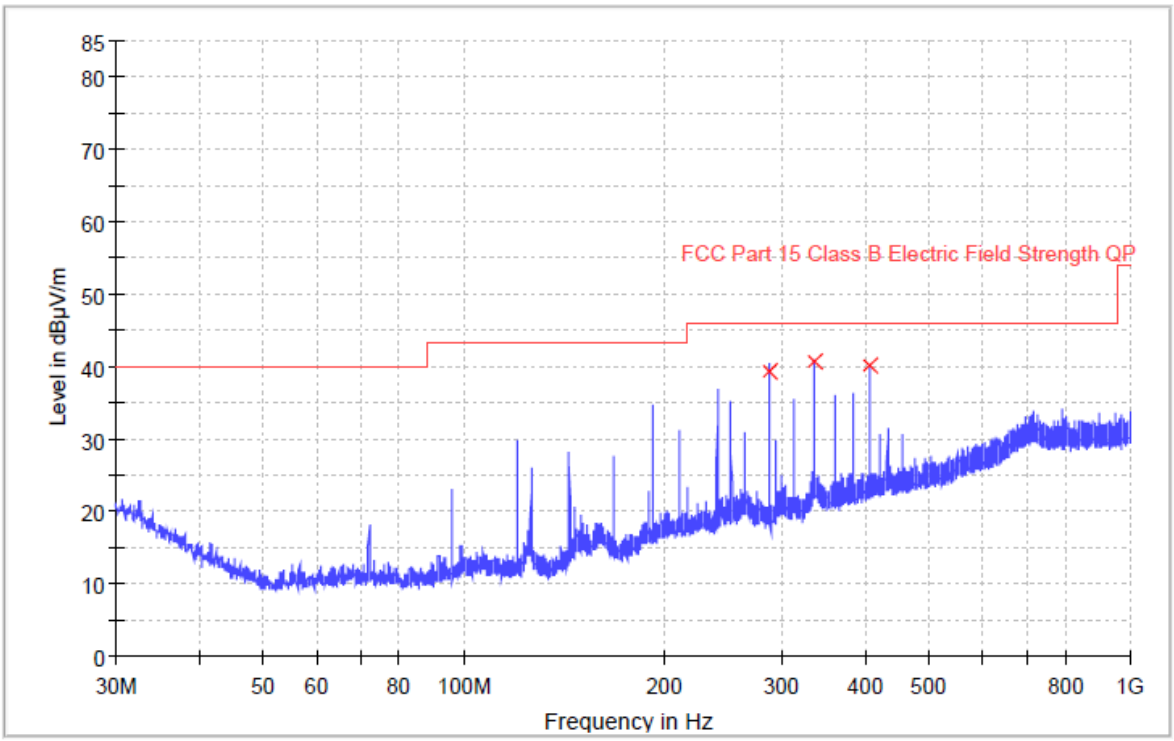


| Frequency (MHz) | Quasi Peak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Corr. (dB/m) | Margin - QPK (dB) | Limit – QPK (dBµV/m) |
|---|---|---|---|---|---|---|---|---|
| 288.000000 | 39.5 | 1000.0 | 120.000 | 100.0 | H | 20.2 | 6.5 | 46.0 |
| 336.002667 | 40.7 | 1000.0 | 120.000 | 100.0 | H | 22.0 | 5.3 | 46.0 |
| 408.009000 | 40.1 | 1000.0 | 120.000 | 100.0 | H | 25.2 | 5.9 | 46.0 |

Remark:
1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
2. Quasi Peak (dBµV/m) = Corr. (dB/m) + Read Level (dBµV)
3. Margin (dB) = Limit Line (dBµV/m) – Level (dBµV/m)

Applicant: SUPER ROD LIMITED
Date of Test: 31 August 2022 Model: SRCAMV6.5
Worst Case Operating Mode: Transmitting (802.11b-Channel 01)

ANT Polarity: Vertical

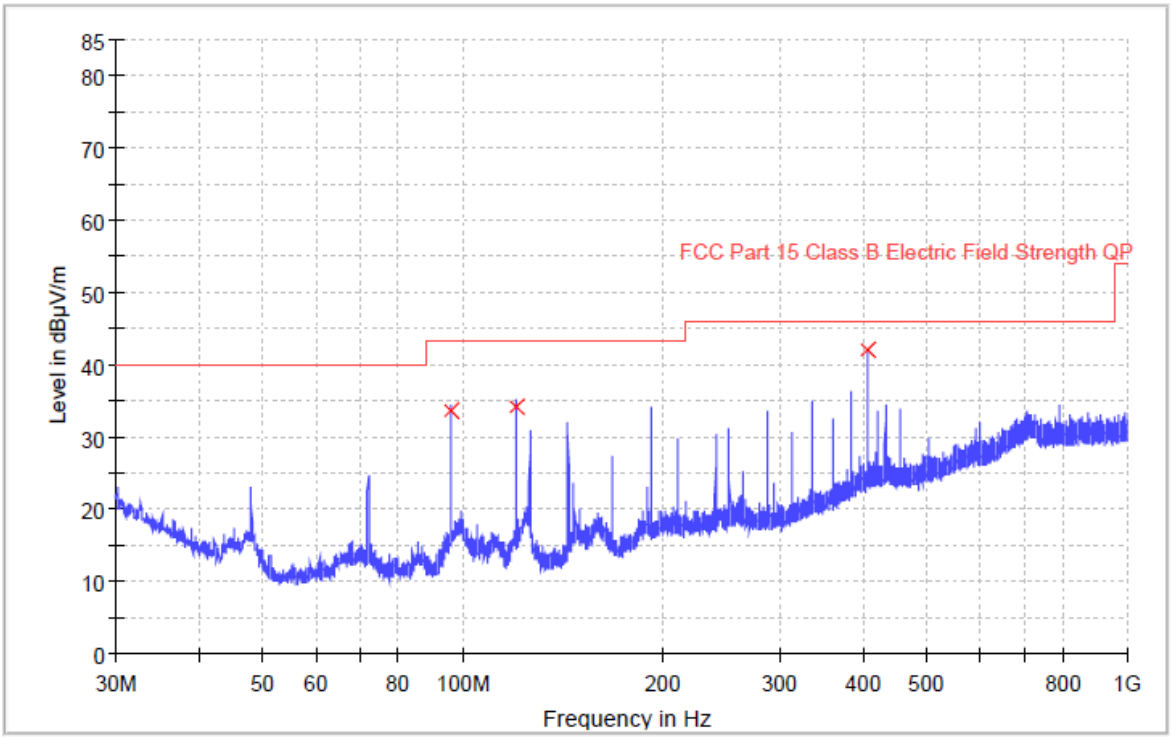


| Frequency (MHz) | Quasi Peak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Polarization | Corr. (dB/m) | Margin - QPK (dB) | Limit – QPK (dBµV/m) |
|---|---|---|---|---|---|---|---|---|
| 95.992333 | 33.7 | 1000.0 | 120.000 | 100.0 | V | 14.5 | 9.8 | 43.5 |
| 119.983667 | 34.2 | 1000.0 | 120.000 | 100.0 | V | 14.3 | 9.3 | 43.5 |
| 408.000000 | 42.0 | 1000.0 | 120.000 | 100.0 | V | 25.2 | 4.0 | 46.0 |

Remark:
1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
2. Quasi Peak (dBµV/m) = Corr. (dB/m) + Read Level (dBµV)
3. Margin (dB) = Limit Line (dBµV/m) – Level (dBµV/m)

Applicant: SUPER ROD LIMITED
Date of Test: 31 August 2022 Model: SRCAMV6.5
Worst Case Operating Mode: Transmitting (802.11b-Channel 01)

**Radiated Emissions (above 1GHz)**

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB/m) | Net at 3m (dBµV/m) | Peak Limit at 3m (dBµV/m) | Margin (dB) |
|---|---|---|---|---|---|---|---|
| Horizontal | *4824.000 | 43.6 | 36.8 | 33.5 | 40.3 | 74.0 | -33.7 |
| Horizontal | *2390.000 | 67.0 | 36.4 | 29.1 | 59.7 | 74.0 | -14.3 |

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB/m) | Net at 3m (dBµV/m) | Average Limit at 3m (dBµV/m) | Margin (dB) |
|---|---|---|---|---|---|---|---|
| Horizontal | *4824.000 | 33.9 | 36.8 | 33.5 | 30.6 | 54.0 | -23.4 |
| Horizontal | *2390.000 | 56.3 | 36.4 | 29.1 | 49.0 | 54.0 | -5.0 |

NOTES:

1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz/VBW=10Hz for average value.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SUPER ROD LIMITED
Date of Test: 31 August 2022 Model: SRCAMV6.5
Worst Case Operating Mode: Transmitting (802.11b-Channel 06)

**Radiated Emissions (above 1GHz)**

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB/m) | Net at 3m (dBµV/m) | Peak Limit at 3m (dBµV/m) | Margin (dB) |
|---|---|---|---|---|---|---|---|
| Horizontal | *4874.000 | 44.5 | 36.7 | 33.4 | 41.2 | 74.0 | -32.8 |
| Horizontal | *7311.000 | 44.7 | 36.6 | 35.8 | 43.9 | 74.0 | -30.1 |

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB/m) | Net at 3m (dBµV/m) | Average Limit at 3m (dBµV/m) | Margin (dB) |
|---|---|---|---|---|---|---|---|
| Horizontal | *4874.000 | 34.6 | 36.7 | 33.4 | 31.3 | 54.0 | -22.7 |
| Horizontal | *7311.000 | 36.4 | 36.6 | 35.8 | 35.6 | 54.0 | -18.4 |

NOTES:

1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SUPER ROD LIMITED
Date of Test: 31 August 2022 Model: SRCAMV6.5
Worst Case Operating Mode: Transmitting (802.11b-Channel 11)

**Radiated Emissions (above 1GHz)**

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB/m) | Net at 3m (dBµV/m) | Peak Limit at 3m (dBµV/m) | Margin (dB) |
|---|---|---|---|---|---|---|---|
| Horizontal | *4924.000 | 44.3 | 36.8 | 33.3 | 40.8 | 74.0 | -33.2 |
| Horizontal | *7386.000 | 48.9 | 36.5 | 29.3 | 41.7 | 74.0 | -32.3 |

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB/m) | Net at 3m (dBµV/m) | Average Limit at 3m (dBµV/m) | Margin (dB) |
|---|---|---|---|---|---|---|---|
| Horizontal | *4924.000 | 32.9 | 36.8 | 33.3 | 29.4 | 54.0 | -24.6 |
| Horizontal | *7386.000 | 43.3 | 36.5 | 29.3 | 36.1 | 54.0 | -17.9 |

NOTES:

1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SUPER ROD LIMITED
Date of Test: 31 August 2022 Model: SRCAMV6.5
Worst Case Operating Mode: Transmitting (802.11g-Channel 01)

**Radiated Emissions (above 1GHz)**

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB/m) | Net at 3m (dBµV/m) | Peak Limit at 3m (dBµV/m) | Margin (dB) |
|---|---|---|---|---|---|---|---|
| Horizontal | *4824.000 | 45.8 | 36.8 | 33.5 | 42.5 | 74.0 | -31.5 |
| Horizontal | *2390.000 | 73.3 | 36.4 | 29.1 | 66.0 | 74.0 | -8.0 |

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB/m) | Net at 3m (dBµV/m) | Average Limit at 3m (dBµV/m) | Margin (dB) |
|---|---|---|---|---|---|---|---|
| Horizontal | *4824.000 | 35.5 | 36.8 | 33.5 | 32.2 | 54.0 | -21.8 |
| Horizontal | *2390.000 | 57.0 | 36.4 | 29.1 | 49.7 | 54.0 | -4.3 |

NOTES:

1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz/VBW=10Hz for average value.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SUPER ROD LIMITED
Date of Test: 31 August 2022 Model: SRCAMV6.5
Worst Case Operating Mode: Transmitting (802.11g-Channel 06)

**Radiated Emissions (above 1GHz)**

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB/m) | Net at 3m (dBµV/m) | Peak Limit at 3m (dBµV/m) | Margin (dB) |
|---|---|---|---|---|---|---|---|
| Horizontal | *4874.000 | 44.0 | 36.7 | 33.4 | 40.7 | 74.0 | -33.3 |
| Horizontal | *7311.000 | 44.9 | 36.6 | 35.8 | 44.1 | 74.0 | -29.9 |

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB/m) | Net at 3m (dBµV/m) | Average Limit at 3m (dBµV/m) | Margin (dB) |
|---|---|---|---|---|---|---|---|
| Horizontal | *4874.000 | 33.8 | 36.7 | 33.4 | 30.5 | 54.0 | -23.5 |
| Horizontal | *7311.000 | 34.9 | 36.6 | 35.8 | 34.1 | 54.0 | -19.9 |

NOTES:

1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SUPER ROD LIMITED
Date of Test: 31 August 2022 Model: SRCAMV6.5
Worst Case Operating Mode: Transmitting (802.11g-Channel 11)

**Radiated Emissions (above 1GHz)**

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB/m) | Net at 3m (dBµV/m) | Peak Limit at 3m (dBµV/m) | Margin (dB) |
|---|---|---|---|---|---|---|---|
| Horizontal | *4924.000 | 43.7 | 36.8 | 33.3 | 40.2 | 74.0 | -33.8 |
| Horizontal | *7386.000 | 49.7 | 36.5 | 29.3 | 42.5 | 74.0 | -31.5 |

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB/m) | Net at 3m (dBµV/m) | Average Limit at 3m (dBµV/m) | Margin (dB) |
|---|---|---|---|---|---|---|---|
| Horizontal | *4924.000 | 31.8 | 36.8 | 33.3 | 28.3 | 54.0 | -25.7 |
| Horizontal | *7386.000 | 42.4 | 36.5 | 29.3 | 35.2 | 54.0 | -18.8 |

NOTES:

1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SUPER ROD LIMITED
Date of Test: 31 August 2022 Model: SRCAMV6.5
Worst Case Operating Mode: Transmitting (802.11n20-Channel 01)

**Radiated Emissions (above 1GHz)**

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB/m) | Net at 3m (dBµV/m) | Peak Limit at 3m (dBµV/m) | Margin (dB) |
|---|---|---|---|---|---|---|---|
| Horizontal | *4824.000 | 42.5 | 36.8 | 33.5 | 39.2 | 74.0 | -34.8 |
| Horizontal | *2390.000 | 71.1 | 36.4 | 29.1 | 63.8 | 74.0 | -10.2 |

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB/m) | Net at 3m (dBµV/m) | Average Limit at 3m (dBµV/m) | Margin (dB) |
|---|---|---|---|---|---|---|---|
| Horizontal | *4824.000 | 34.0 | 36.8 | 33.5 | 30.7 | 54.0 | -23.3 |
| Horizontal | *2390.000 | 57.5 | 36.4 | 29.1 | 50.2 | 54.0 | -3.8 |

NOTES:

1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz/VBW=10Hz for average value.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SUPER ROD LIMITED
Date of Test: 31 August 2022 Model: SRCAMV6.5
Worst Case Operating Mode: Transmitting (802.11n20-Channel 06)

**Radiated Emissions (above 1GHz)**

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB/m) | Net at 3m (dBµV/m) | Peak Limit at 3m (dBµV/m) | Margin (dB) |
|---|---|---|---|---|---|---|---|
| Horizontal | *4874.000 | 45.9 | 36.7 | 33.4 | 42.6 | 74.0 | -31.4 |
| Horizontal | *7311.000 | 44.3 | 36.6 | 35.8 | 43.5 | 74.0 | -30.5 |

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB/m) | Net at 3m (dBµV/m) | Average Limit at 3m (dBµV/m) | Margin (dB) |
|---|---|---|---|---|---|---|---|
| Horizontal | *4874.000 | 33.5 | 36.7 | 33.4 | 30.2 | 54.0 | -23.8 |
| Horizontal | *7311.000 | 34.4 | 36.6 | 35.8 | 33.6 | 54.0 | -20.4 |

NOTES:

1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SUPER ROD LIMITED
Date of Test: 31 August 2022 Model: SRCAMV6.5
Worst Case Operating Mode: Transmitting (802.11n20-Channel 11)

**Radiated Emissions (above 1GHz)**

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB/m) | Net at 3m (dBµV/m) | Peak Limit at 3m (dBµV/m) | Margin (dB) |
|---|---|---|---|---|---|---|---|
| Horizontal | *4924.000 | 45.8 | 36.8 | 33.3 | 42.3 | 74.0 | -31.7 |
| Horizontal | *7386.000 | 47.6 | 36.5 | 29.3 | 40.4 | 74.0 | -33.6 |

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB/m) | Net at 3m (dBµV/m) | Average Limit at 3m (dBµV/m) | Margin (dB) |
|---|---|---|---|---|---|---|---|
| Horizontal | *4924.000 | 33.6 | 36.8 | 33.3 | 30.1 | 54.0 | -23.9 |
| Horizontal | *7386.000 | 39.5 | 36.5 | 29.3 | 32.3 | 54.0 | -21.7 |

NOTES:

1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SUPER ROD LIMITED
Date of Test: 31 August 2022 Model: SRCAMV6.5
Worst Case Operating Mode: Transmitting (802.11n40-Channel 03)

**Radiated Emissions (above 1GHz)**

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB/m) | Net at 3m (dBµV/m) | Peak Limit at 3m (dBµV/m) | Margin (dB) |
|---|---|---|---|---|---|---|---|
| Horizontal | *4844.000 | 41.5 | 36.8 | 33.5 | 38.2 | 74.0 | -35.8 |
| Horizontal | *2390.000 | 70.7 | 36.4 | 29.1 | 63.4 | 74.0 | -10.6 |

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB/m) | Net at 3m (dBµV/m) | Average Limit at 3m (dBµV/m) | Margin (dB) |
|---|---|---|---|---|---|---|---|
| Horizontal | *4844.000 | 34.4 | 36.8 | 33.5 | 31.1 | 54.0 | -22.9 |
| Horizontal | *2390.000 | 58.3 | 36.4 | 29.1 | 51.0 | 54.0 | -3.0 |

NOTES:

1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz/VBW=10Hz for average value.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SUPER ROD LIMITED
Date of Test: 31 August 2022 Model: SRCAMV6.5
Worst Case Operating Mode: Transmitting (802.11n40-Channel 06)

**Radiated Emissions (above 1GHz)**

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB/m) | Net at 3m (dBµV/m) | Peak Limit at 3m (dBµV/m) | Margin (dB) |
|---|---|---|---|---|---|---|---|
| Horizontal | *4874.000 | 40.4 | 36.7 | 33.4 | 37.1 | 74.0 | -36.9 |
| Horizontal | *7311.000 | 43.3 | 36.6 | 35.8 | 42.5 | 74.0 | -31.5 |

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB/m) | Net at 3m (dBµV/m) | Average Limit at 3m (dBµV/m) | Margin (dB) |
|---|---|---|---|---|---|---|---|
| Horizontal | *4874.000 | 33.9 | 36.7 | 33.4 | 30.6 | 54.0 | -23.4 |
| Horizontal | *7311.000 | 36.5 | 36.6 | 35.8 | 35.7 | 54.0 | -18.3 |

NOTES:

1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SUPER ROD LIMITED
Date of Test: 31 August 2022 Model: SRCAMV6.5
Worst Case Operating Mode: Transmitting (802.11n40-Channel 09)

**Radiated Emissions (above 1GHz)**

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB/m) | Net at 3m (dBµV/m) | Peak Limit at 3m (dBµV/m) | Margin (dB) |
|---|---|---|---|---|---|---|---|
| Horizontal | *4904.000 | 42.1 | 36.8 | 33.3 | 38.6 | 74.0 | -35.4 |
| Horizontal | *7356.000 | 50.6 | 36.5 | 29.3 | 43.4 | 74.0 | -30.6 |

| Polarization | Frequency (MHz) | Reading (dBµV) | Pre-Amp Gain (dB) | Antenna Factor (dB/m) | Net at 3m (dBµV/m) | Average Limit at 3m (dBµV/m) | Margin (dB) |
|---|---|---|---|---|---|---|---|
| Horizontal | *4904.000 | 35.4 | 36.8 | 33.3 | 31.9 | 54.0 | -22.1 |
| Horizontal | *7356.000 | 43.8 | 36.5 | 29.3 | 36.6 | 54.0 | -17.4 |

NOTES:

1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SUPER ROD LIMITED
Date of Test: 31 August 2022 Model: SRCAMV6.5

## 4.9 Conducted Emission

Worst Case Conducted Emission (802.11b-Channel 01)
at 24.002000MHz
is passed by 14.7dB margin.

For the electronic filing, the worst case radiated emission configuration photographs are saved with filename: conducted photos.pdf.

Applicant: SUPER ROD LIMITED
Date of Test: 31 August 2022
Model: SRCAMV6.5
Worst Case Operating Mode: Transmitting (802.11b-Channel 01)
Phase: Live

## Graphic / Data Table

### Conducted Emissions
### Pursuant to FCC 15.207: Emissions Requirement

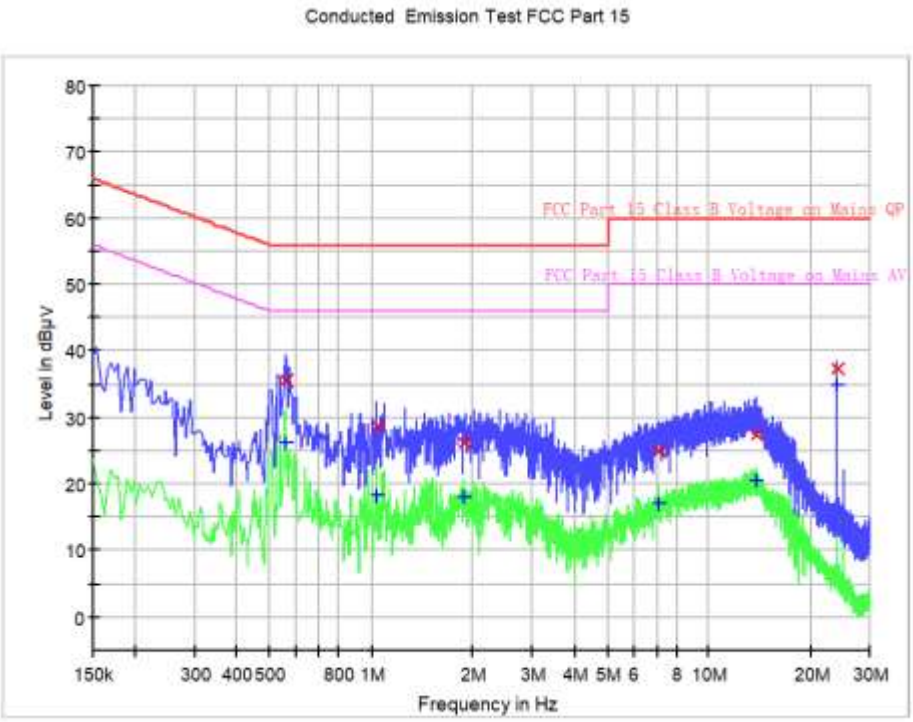


## Limit and Margin QP

| Frequency (MHz) | Quasi Peak (dBµV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|---|---|---|---|---|---|---|
| 0.558000 | 35.6 | 9.000 | L1 | 9.6 | 20.4 | 56.0 |
| 1.038000 | 28.6 | 9.000 | L1 | 9.7 | 27.4 | 56.0 |
| 1.878000 | 26.1 | 9.000 | L1 | 9.7 | 29.9 | 56.0 |
| 7.130000 | 24.9 | 9.000 | L1 | 9.8 | 35.1 | 60.0 |
| 13.842000 | 27.3 | 9.000 | L1 | 10.1 | 32.7 | 60.0 |
| 24.002000 | 37.4 | 9.000 | L1 | 10.7 | 22.6 | 60.0 |

## Limit and Margin AV

| Frequency (MHz) | Average (dBµV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|---|---|---|---|---|---|---|
| 0.558000 | 26.1 | 9.000 | L1 | 9.6 | 19.9 | 46.0 |
| 1.038000 | 18.4 | 9.000 | L1 | 9.7 | 27.6 | 46.0 |
| 1.878000 | 18.0 | 9.000 | L1 | 9.7 | 28.0 | 46.0 |
| 7.130000 | 17.1 | 9.000 | L1 | 9.8 | 32.9 | 50.0 |
| 13.842000 | 20.4 | 9.000 | L1 | 10.1 | 29.6 | 50.0 |
| 24.002000 | 34.8 | 9.000 | L1 | 10.7 | 15.2 | 50.0 |

Applicant: SUPER ROD LIMITED
Date of Test: 31 August 2022
Model: SRCAMV6.5
Worst Case Operating Mode: Transmitting (802.11b-Channel 01)
Phase: Neutral

## Graphic / Data Table

### Conducted Emissions
### Pursuant to FCC 15.207: Emissions Requirement

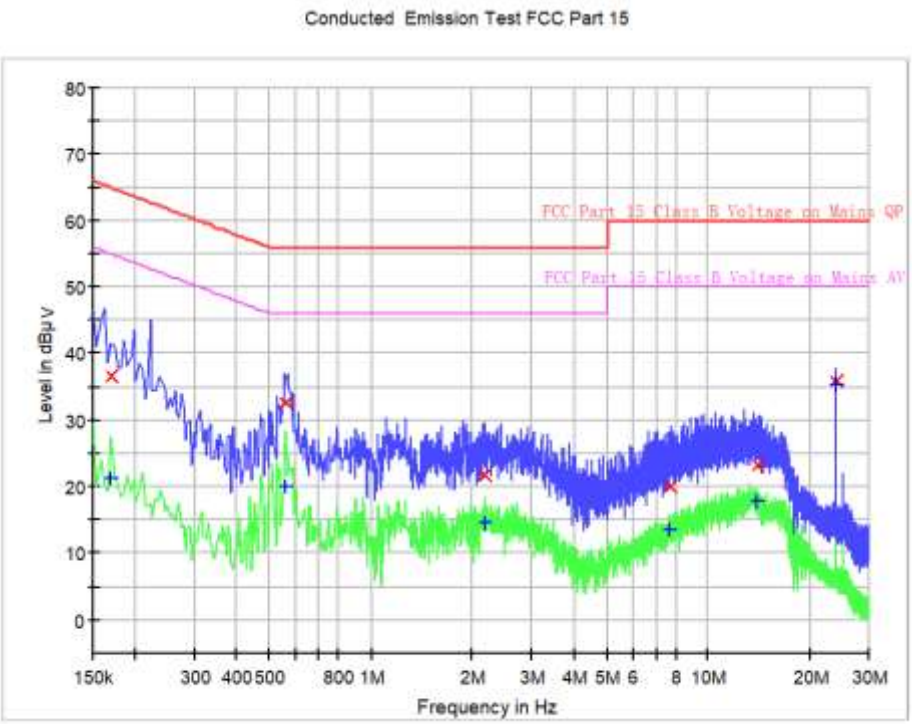


## Limit and Margin QP

| Frequency (MHz) | Quasi Peak (dBµV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|---|---|---|---|---|---|---|
| 0.170000 | 36.8 | 9.000 | N | 9.6 | 28.2 | 65.0 |
| 0.562000 | 32.7 | 9.000 | N | 9.6 | 23.3 | 56.0 |
| 2.178000 | 21.8 | 9.000 | N | 9.7 | 34.2 | 56.0 |
| 7.686000 | 20.2 | 9.000 | N | 9.8 | 39.8 | 60.0 |
| 13.938000 | 23.2 | 9.000 | N | 10.1 | 36.8 | 60.0 |
| 24.002000 | 36.0 | 9.000 | N | 10.7 | 24.0 | 60.0 |

## Limit and Margin AV

| Frequency (MHz) | Average (dBµV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|---|---|---|---|---|---|---|
| 0.170000 | 21.3 | 9.000 | N | 9.6 | 33.7 | 55.0 |
| 0.562000 | 20.1 | 9.000 | N | 9.6 | 25.9 | 46.0 |
| 2.178000 | 14.6 | 9.000 | N | 9.7 | 31.4 | 46.0 |
| 7.686000 | 13.5 | 9.000 | N | 9.8 | 36.5 | 50.0 |
| 13.938000 | 17.9 | 9.000 | N | 10.1 | 32.1 | 50.0 |
| 24.002000 | 35.3 | 9.000 | N | 10.7 | 14.7 | 50.0 |

Applicant: SUPER ROD LIMITED
Date of Test: 31 August 2022
Model: SRCAMV6.5

4.10 Radiated Emissions from Digital Section of Transceiver, FCC Ref: 15.109

[ ] Not required - No digital part

[ ] Test results are attached

[ x ] Included in the separated report.

Applicant: SUPER ROD LIMITED
Date of Test: 31 August 2022
Model: SRCAMV6.5

## 4.11 Transmitter Duty Cycle Calculation and Measurements, FCC Rule 15.35(b), (c)

The EUT antenna output port was connected to the input of the spectrum analyzer. The analyzer center frequency was set to EUT RF channel carrier. The SWEP function on the analyzer was set to ZERO SPAN. The Transmitter ON time was determined from the resultant time-amplitude display:

| | |
|---|---|
| | See attached spectrum analyzer chart (s) for Transmitter timing |
| | See Transmitter timing diagram provided by manufacturer |
| x | Not applicable, duty cycle was not used. |

## 5.0 Equipment Photographs

For electronic filing, the photographs are saved with filename: external photos.pdf & internal photos.pdf.

## 6.0 Product Labeling

For electronic filing, the FCC ID label artwork and location is saved with filename: label.pdf.

## 7.0 Technical Specifications

For electronic filing, the block diagram and circuit diagram are saved with filename: block.pdf and circuit.pdf respectively.

## 8.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

## 9.0 Confidentiality Request

For electronic filing, the confidentiality request of the tested EUT is saved with filename: request.pdf.

## 10.0 Discussion of Pulse Desensitization

The determination of pulse desensitivity was made in accordance with Hewlett Packard Application Note 150-2, *Spectrum Analysis ... Pulsed RF.*

Pulse desensitivity is not applicable for this device since the transmitter transmits the RF signal continuously.

## 11.0 Test Equipment List

| Equipment No. | Equipment | Manufacturer | Model No. | Serial No. | Cal. Date | Due Date |
|---|---|---|---|---|---|---|
| SZ061-12 | BiConiLog Antenna | ETS | 3142E | 00166158 | 04-Aug-2021 | 04-Aug-2024 |
| SZ185-03 | EMI Receiver | R&S | ESCI | 100547 | 20-Dec-2021 | 20-Dec-2022 |
| SZ061-08 | Horn Antenna | ETS | 3115 | 00092346 | 05-Sep-2021 | 05-Sep-2024 |
| SZ061-06 | Active Loop Antenna | Electro-Metrics | EM-6876 | 217 | 18-May-2021 | 18-May-2023 |
| SZ056-03 | Spectrum Analyzer | R&S | FSP 30 | 101148 | 16-May-2022 | 16-May-2023 |
| SZ056-06 | Signal Analyzer | R&S | FSV 40 | 101101 | 20-Dec-2021 | 20-Dec-2022 |
| SZ181-04 | Preamplifier | Agilent | 8449B | 3008A02474 | 16-May-2022 | 16-May-2023 |
| SZ188-01 | Anechoic Chamber | ETS | RFD-F/A-100 | 4102 | 12-Dec-2021 | 12-Dec-2024 |
| SZ062-23 | RF Cable | RADIALL | SF104PE | -- | 26-Oct-2021 | 26-Oct-2022 |
| SZ062-35 | RF Cable | RADIALL | A50-3.5M3.5M-8M | -- | 26-Oct-2021 | 26-Oct-2022 |
| SZ062-30 | RF Cable | RADIALL | A50-3.5M3.5M-4.5M | -- | 26-Oct-2021 | 26-Oct-2022 |
| SZ062-31 | RF Cable | RADIALL | A50-3.5M3.5M-1M | | 26-Oct-2021 | 26-Oct-2022 |
| SZ067-04 | Notch Filter | Micro-Tronics | BRM50702-02 | -- | 17-May-2022 | 17-May-2023 |
| SZ185-02 | EMI Test Receiver | R&S | ESCI | 100692 | 12-Jul-2021 | 12-Jul-2022 |
| SZ187-01 | Two-Line V-Network | R&S | ENV216 | 100072 | 02-Nov-2021 | 02-Nov-2022 |
| SZ062-16 | RF Cable | HUBER+SUHNER | CBL2-BN-1m | 110127-2231000 | 26-Oct-2021 | 26-Oct-2022 |
| SZ188-03 | Shielding Room | ETS | RFD-100 | 4100 | 07-Jan-2020 | 07-Jan-2023 |

********** End of Report**********